Exploded View Parts List
Model: 5C50

Symbol No.	Parts No.	Description		Q'ty
1	UW1073	Spacer, 1073		4
2	YAA40C14	Screw, M4x14		8
3	YWA040C	Washer, 4ø		8
4	UW1072	Spacer, 1072		4
5	UG1001	Bonnet, 1001		1
6	UN1007	Rubber, 1007		1
7	AG0063	Terminal, GND		1
8	UJ1064	Cover, 1064		1
9	AC0010	AC Socket		3
10	BK0019	AC Cord	(AZ)	1
	BK0020	AC Cord	(AY)	1
	BK0023	AC Cord	(AG)	1
	BK0035	AC Cord	(J)	1
11	BU0033	Cord Stopper	(AY,J)	1
	BU0039	Cord Stopper	(AG)	1
12	UC1048	Back Panel		1
13	AT0094	12P Pin Jack		1
14	AS0002	Din Connector		1
15	AS0082	MC Trans Socket		1
16	AT0095	10P Pin Jack		1
17	WC1032	Ornament Plate 1032		2
18	WC1026	Ornament Plate 1026		2
19	WC1028	Ornament Mole 1028		1
20	PT0113	Power Trans P-2105 (Mulch)		1
21	SR0074	Rotary SW. 5100 SRF-2045 (Function)		1
22	UZ1097	Shaft, 1097		1
23	UW1078	Spacer, 1078		4
24	WC1029	Ornament Mole 1029		1
25	UJ1077	Knob, Mold (Imp-Adj. Preset)		3
26	RV0112	VR, 150KAA (Imp-Adj.)		2
27	SR0073	SW, Rotary SRA2045	(EQ)	1
28	SR0075	SW, Rotary SRZ-V083 (Mode)		1
29	SL0030	SW, Lever SLA62311 (Moni)		1
30	SL0034	SW, Lever SLA66303 (Dubb,Sub)		2
31	SL0033	SW, Lever SLA64352 (High)		1
32	SL0032	SW, Lever SLA64353 (ATT)		1
33	RV0152	VR, 500KBB (fiter)		1
34	RV0150	VR, 2KAA (Preset)		1
35	AL0041	Lamp 12V 75mA		2
36	WZ1038	Holder, Lamp 1038		1
37	RV0151	V16 5100 200KMN (Blance)		1
38	SP0090	SW, Power		1
	SP0072	SW, Power	(J)	1
39	RV0176	VR, WK 110 100Kx2 (VR)		1
40	WD1057	Escutcheon 1057		1
41	US1033	Stand 1033		2
42	WD1061	Escutcheon 1061		1
43	WG1014	Pilot, 1014		1
44	WU1016	Filter, 1016		1
45	WE1051	Protector, 1051		1
46	WA1073	Panel, Front		1
47	WK1092	Knob, Metal (Function,EQ,Bal,VR)		4
48	WJ1071	Knob, Mold (Moni,Dubb,Sub,Hi,Att)		5
49	WJ1076	Knob, Mold (Mode, Filter)		2
50	WJ1072	Knob, (Power)		1
51	WN1010	Foot		4
52	UE1088	Bottom Plate		1

www.hifiengine.com

Exploded View

5C50

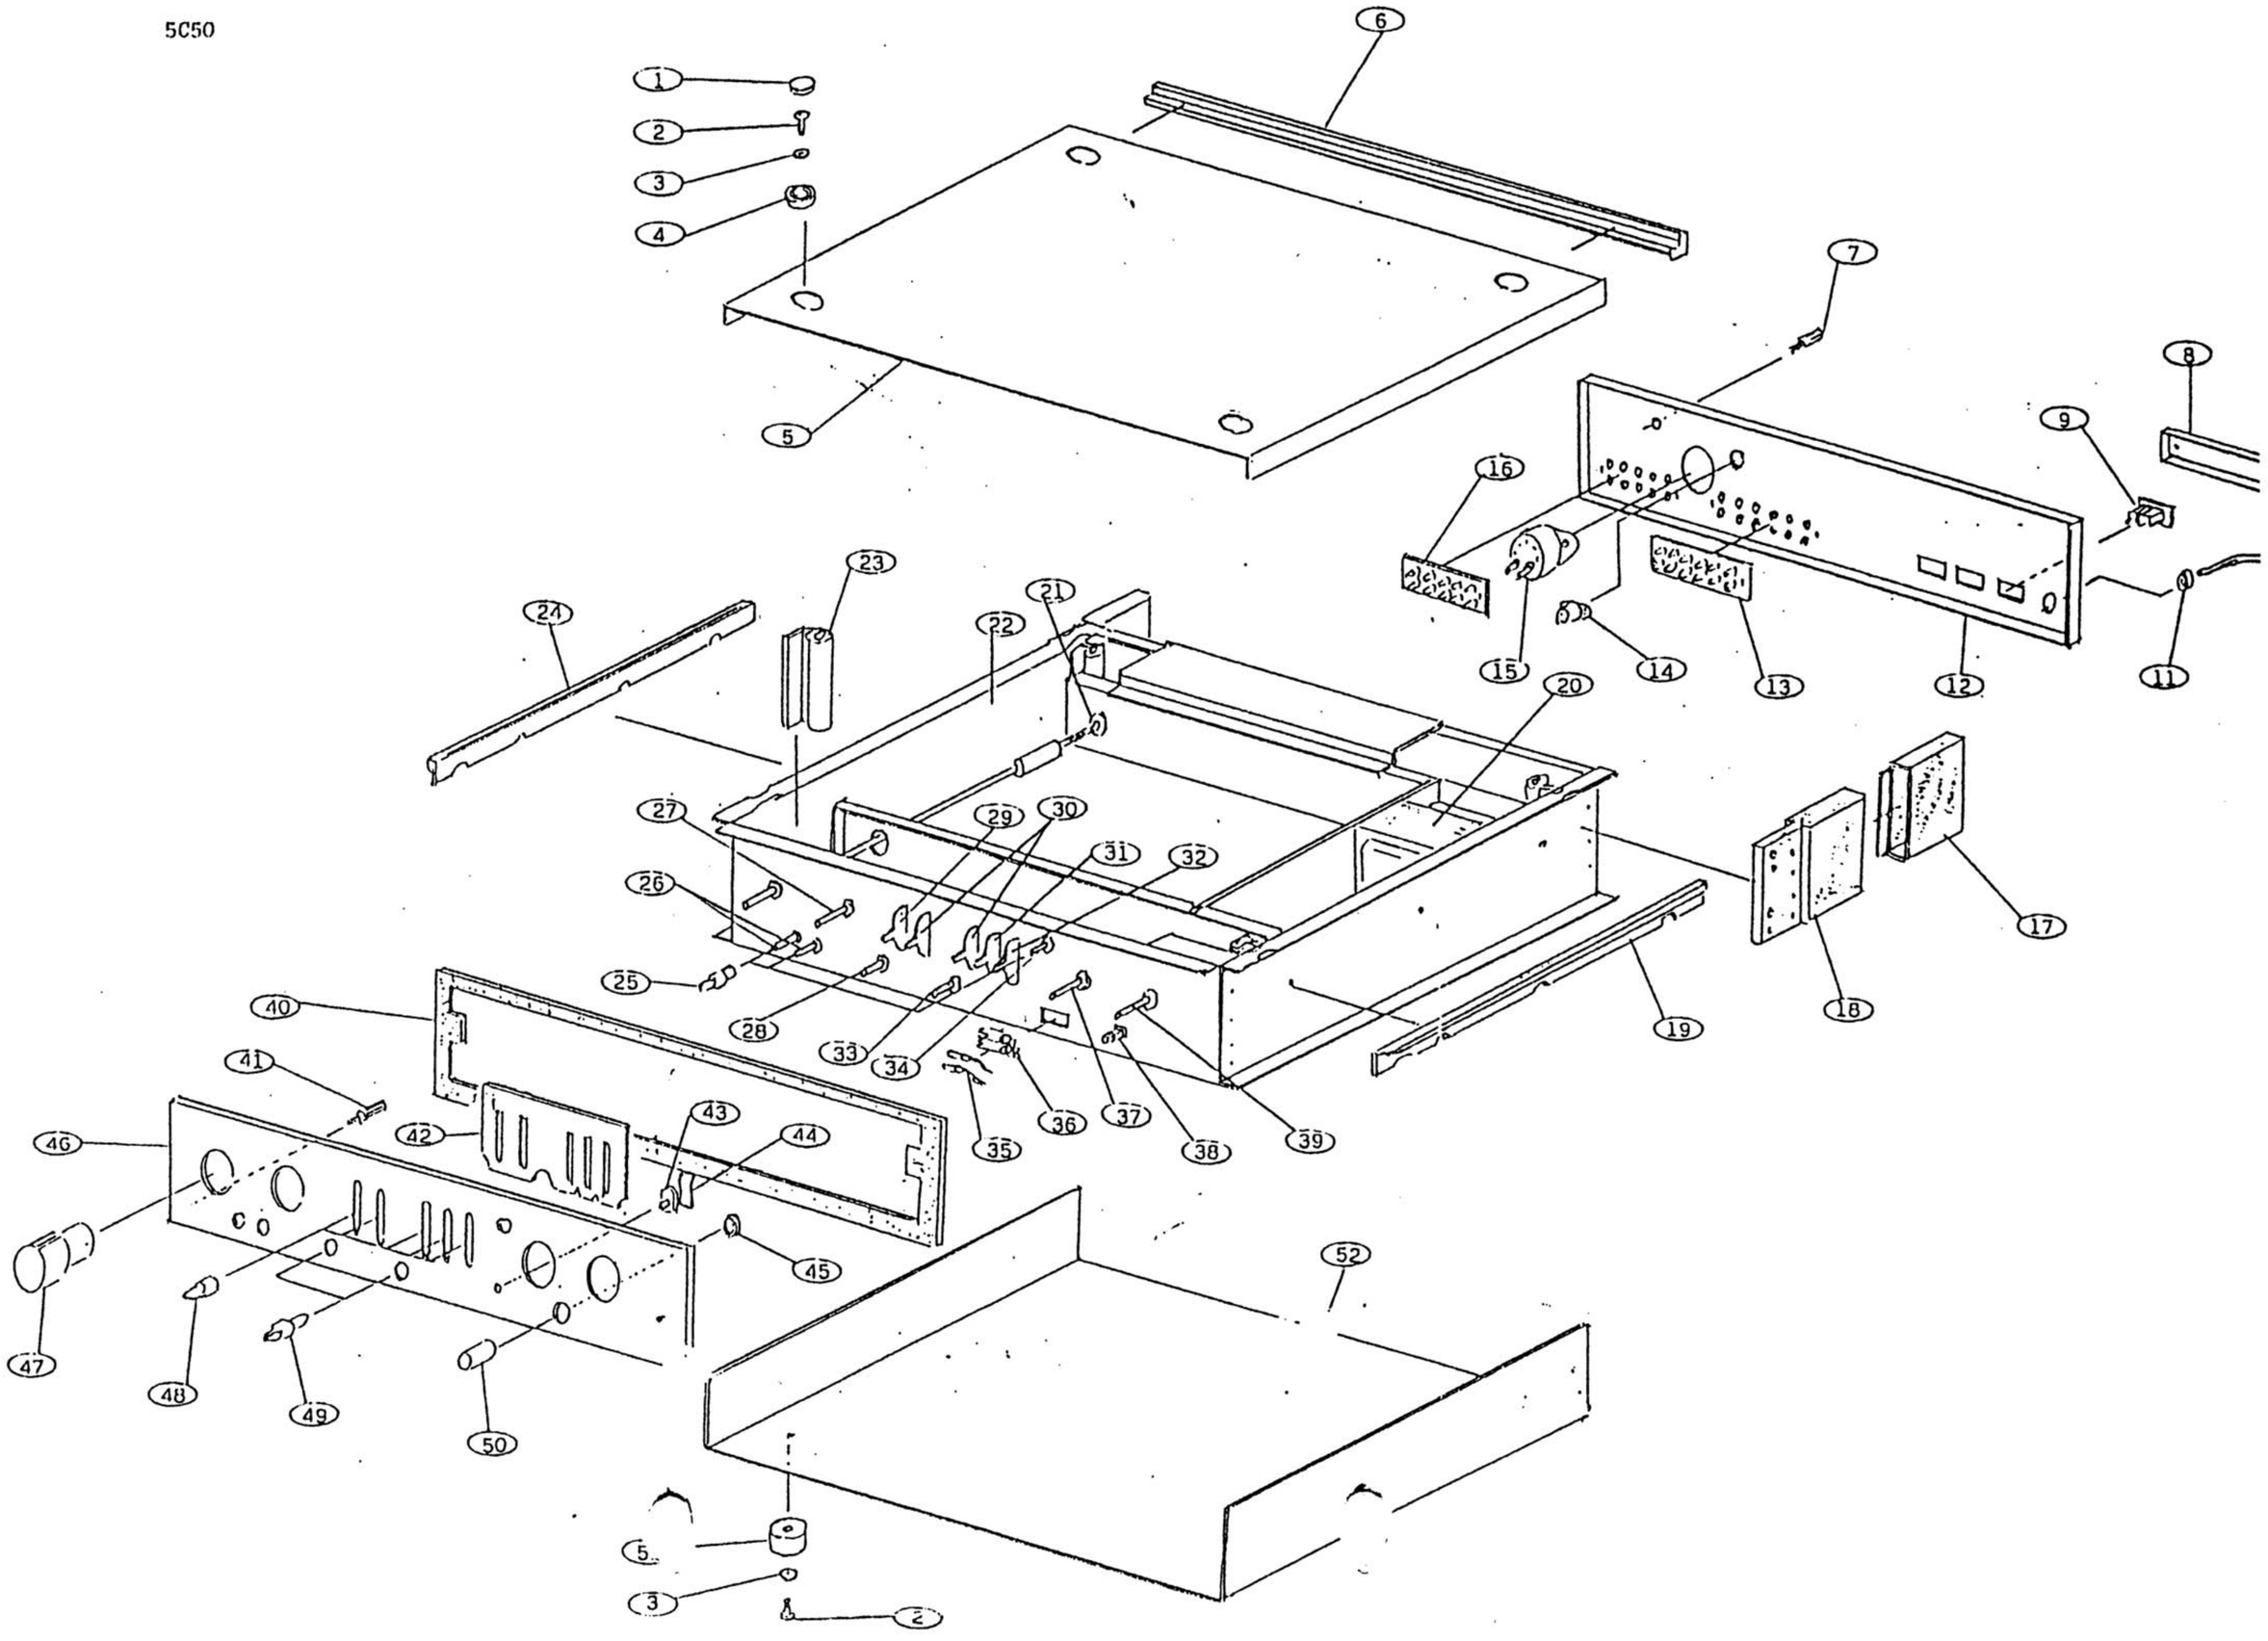

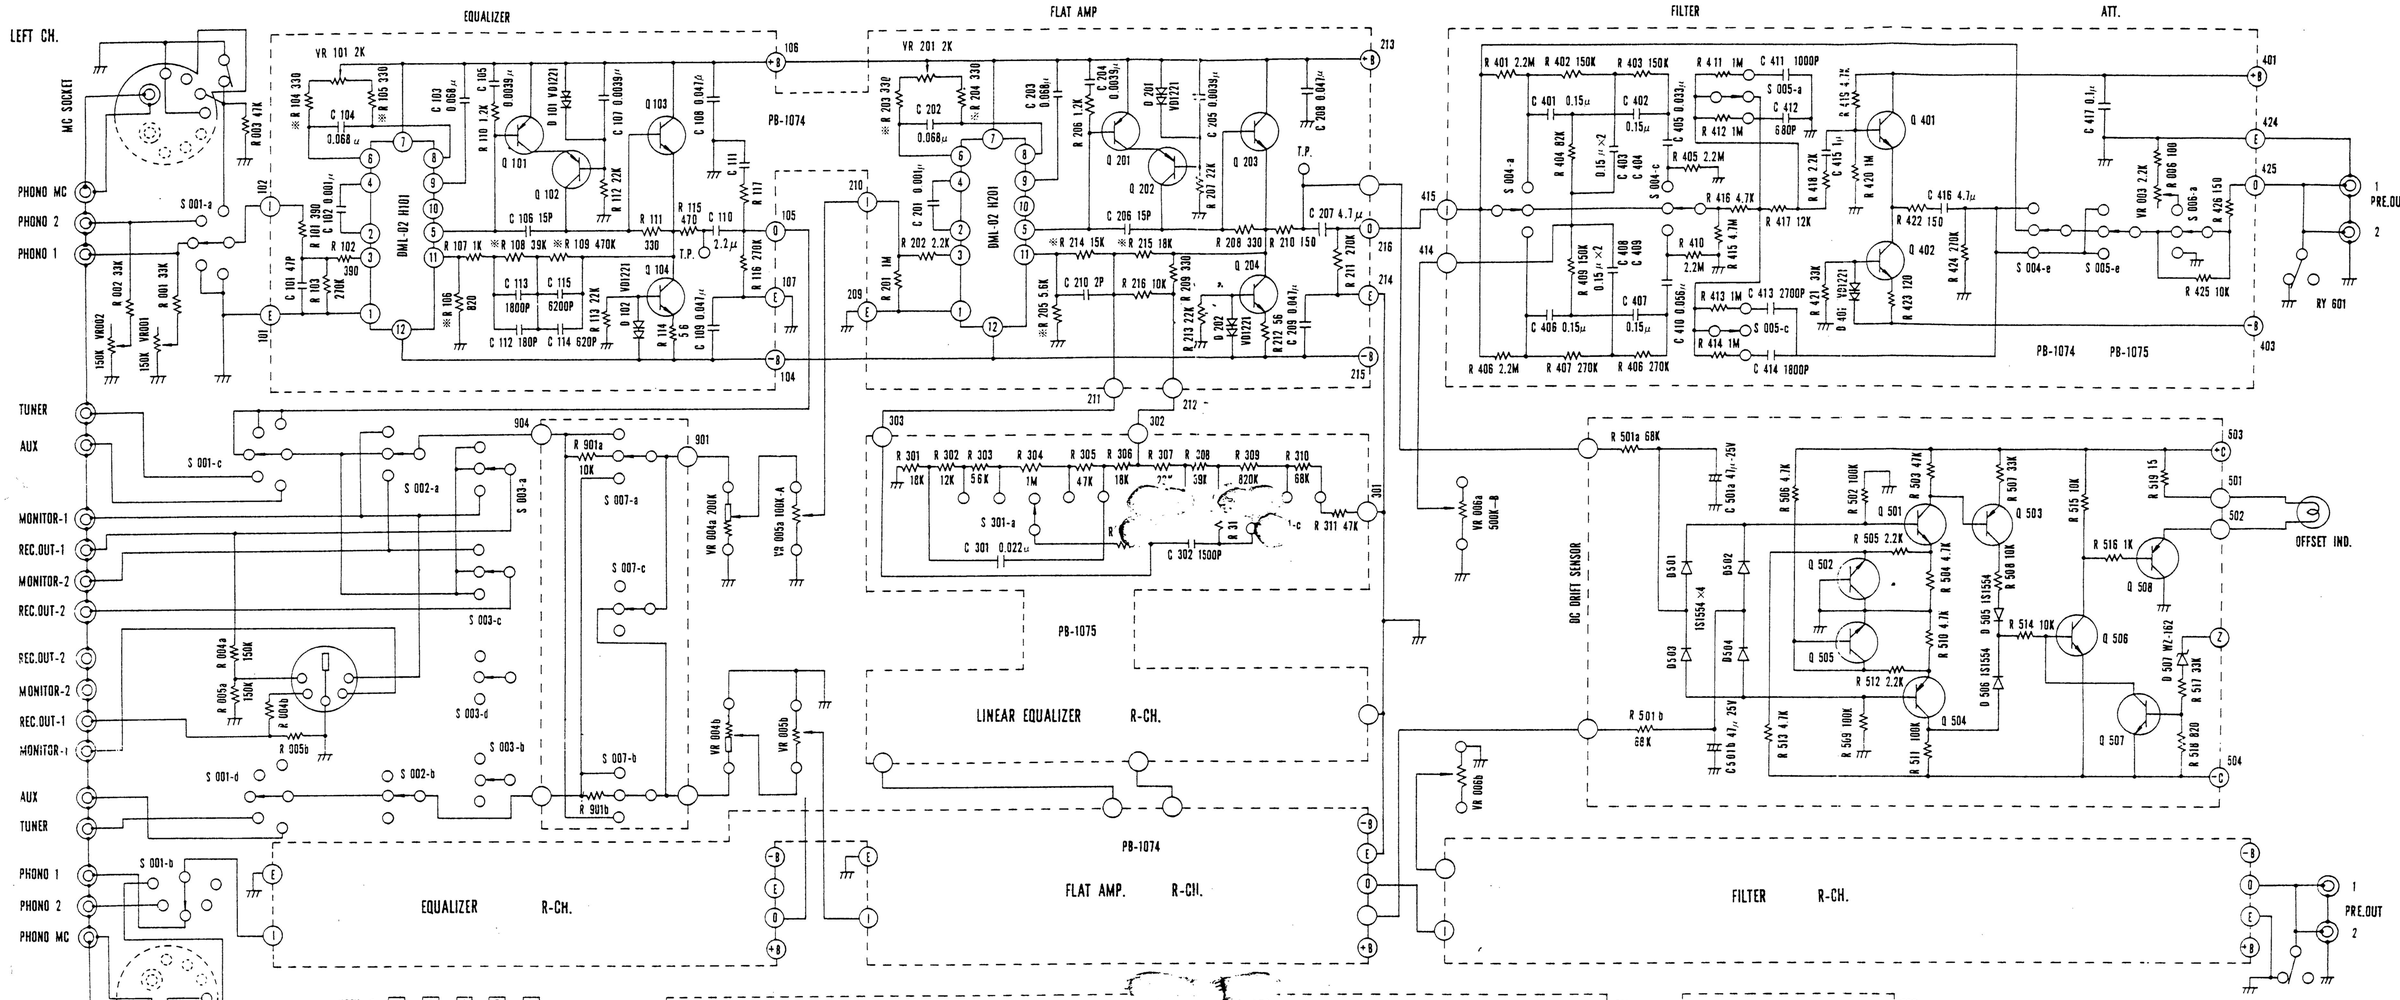

S 001 ..... FUNCTION
S 002 ..... TAPE MONITOR
S 003 ..... DUBBING
S 004 ..... SUBSONIC FILTER
S 005 ..... HIGH CUT FILTER
S 006 ..... ATTENUATER
S 007 ..... MODE
S 008 ..... POWER

VR 001, VR 002 ..... PHONO IMPEDANCE
VR 003 ..... ATT. PRESET
VR 004 ..... BALANCE
VR 005 ..... VOLUME
VR 006 ..... SUBSONIP CONT.
VR 101, VR 201 ..... DC BALANCE

2SC1775A: 1.BASE 2.COLLECTOR 3.EMITTER
2SC1345, 2SA836: 1.BASE 2.COLLECTOR 3.EMITTER
2SC1940, 2SA915: 1.BASE 2.COLLECTOR 3.EMITTER
2SC2239, 2SA969: 1.BASE 2.EMITTER 3.COLLECTOR

H 101, H 201 ..... DML-02
Q 101, Q 102, Q 201, Q 202, Q 503, Q 504, Q 601, Q 805, Q 806 ..... 2SA836
Q 401, Q 402 ..... 2SC1775A
Q 801 ..... 2SA653, 2SA969
Q 804 ..... 2SC2239
Q 501, Q 502 Q 505, Q 506, Q 507, Q 602, Q 701, Q 702, Q 802, Q 803 ..... 2SC1345
Q 103, Q 104, Q 203, Q 204 ..... 2SC1940
Q 508 ..... 2SA915

1. UNLESS OTHER WISE SPECIFIED. ALL RESISTOR ARE IN OHM ¼ WATT. ALL CAPACITOR ARE IN FARAD.
2. TRANSISTOR AND DIODES MAY BE REPLACED WITH ANY TYPE HAVING COMPARABLE RATINGS.
3. DUE TO CONTINUED IMPROVEMENTS LUX RESERVE THE RIGHT TO ALTER THE CIRCUIT OR SPECIFICATION.

※METAL FILM RESISTOR

ULTIMATE HIGH FIDELITY
5C50