

# The Innovation Paradigm



Conceptualise, Idealise, Transform.

“The difference is merely a different set of ideas”

*by Waldo Hitcher*

*Team-Fly®*

# THE INNOVATION PARADIGM

*Replaced*

W. HITCHER

MC G R A W - H I L L

NEW YORK   SAN FRANCISCO   WASHINGTON D.C .   AUCKLAND   BOGOTÁ  
CARACAS   LISBON   LONDON   MADRID   MEXICO   CITY   MILAN  
MONTREAL   NEW DELHI   SAN JUAN   SINGAPORE  
SYDNEY   TOKYO   TORONTO

*McGraw-Hill*

Copyright © 2006 by Waldo Hitcher. All rights reserved. Manufactured in the United America. Except as permitted under the United States Copyright Act of 1976, no part of this publication

may be reproduced or distributed in any form or by any means, or stored in a database or system, without the prior written permission of the publisher.

0-07-190789-0

The material in this eBook also appears in the print version of this title: 0-07-190790-0.

All trademarks are trademarks of their respective owners. Rather than put a trademark symbol after every occurrence of a trademarked name, we use names in an editorial fashion only, and to the benefit of the trademark owner, with no intention of infringement of the trademark. Where such designations appear in this book, they have been printed with initial caps.

McGraw-Hill eBooks are available at special quantity discounts to use as premiums and sales promotions, or for use in corporate training programs.

## TERMS OF USE

This is a copyrighted work and The McGraw-Hill Companies, Inc. ("McGraw-Hill") and its licensors reserve all rights in and to the work. Use of this work is subject to these terms. Except as permitted under the Copyright Act of 1976 and the right to store and retrieve one copy of the work, you may not decompile, disassemble, reverse engineer, reproduce, modify, create derivative works based upon, transmit, distribute, disseminate, sell, publish or sublicense the work or any part of it without McGraw-Hill's prior consent. You may use the work for your own non commercial and personal use; any other use of the work is strictly prohibited. Your right to use the work may be terminated if you fail to comply with these terms.

THE WORK IS PROVIDED "AS IS". MCGRAW-HILL AND ITS LICENSORS MAKE NO GUARANTEES OR WARRANTIES AS TO THE ACCURACY, ADEQUACY OR COMPLETENESS OF OR RESULTS TO BE OBTAINED FROM USING THE WORK, INCLUDING ANY INFORMATION THAT CAN BE ACCESSED THROUGH THE WORK VIA HYPERLINK OR OTHERWISE, AND EXPRESSLY DISCLAIM ANY WARRANTY, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. McGraw-Hill and its licensors do not warrant or guarantee that the functions contained in the work will meet your requirements or that its operation will be uninterrupted or error free. Neither McGraw-Hill nor its licensors shall be liable to you or anyone else for any inaccuracy, error or omission, regardless of cause, in the work or for any damages resulting therefrom.

McGraw-Hill has no responsibility for the content of any information accessed through the work.

Under no circumstances shall McGraw-Hill and/or its licensors be liable for any indirect, incidental, special, punitive, consequential or similar damages that result from the use of or inability to use the work, even if any of them has been advised of the possibility of such damages. This limitation of liability shall apply to any claim or cause whatsoever whether such claim or cause arises in contract, tort or otherwise.

*This page intentionally left blank*

# Contents

<b>Section 1 Theory .....</b>	<b>13</b>
<i>Chapter.1 The Problem with Innovation today .....</i>	<i>13</i>
The Innovation Paradigm .....	13
<i>Chapter.2 The Innovation Continuum .....</i>	<i>14</i>
Stepping Stones.....	15
Nesting .....	16
Product Information Inheritance .....	17
Innovation Ballistics.....	19
<i>Chapter.3 Analogy .....</i>	<i>20</i>
<i>Chapter.4 Insights .....</i>	<i>23</i>
<i>Chapter.5 Constraints and Options .....</i>	<i>24</i>
<i>Chapter.6 Ontology, Taxonomies &amp; Language.....</i>	<i>25</i>
<b>Section 2 Practice .....</b>	<b>27</b>
<i>Chapter.7 Three Steps to Innovation .....</i>	<i>27</i>
Step One – Conceptualise.      What does the product do? .....	27
Step Two – Idealise.      What do you want it to do? .....	27
Step Three – Transform.      Change the concept.....	27
<i>Chapter.8 Conceptualise .....</i>	<i>28</i>
Analogy Patterns .....	29
Memory Systems & Heuristics .....	30
Product Archeology.....	31
Product Ballistics .....	31
<i>Chapter.9 Idealise .....</i>	<i>32</i>
Ideality and IFR .....	33
<i>Chapter.10 Transform .....</i>	<i>33</i>
Concept Changing.....	34
Make and Move .....	34
Perspective.....	35
Effects Database.....	36
Principles .....	37
<i>Chapter.11 Appendix.....</i>	<i>37</i>
Source methods.....	37
Language .....	47
Effects Database (extract).....	48
The Triz 40 Inventive Principles.....	294
Innovators.....	297
History of Innovation .....	298
References .....	318
Contents.....	320

*This page intentionally left blank.*



# Figures

Figure 1 Innovation Continuum from Laws to Reality.....	14
Figure 2 Stepping Stone 3D Nesting .....	17
Figure 3 Product Information Inheritance.....	18
Figure 4 Innovation Ballistics .....	19
Figure 5 Analogy .....	20
Figure 6 Innovation Taxonomy .....	26
Figure 7 Dustpan and Brush.....	28
Figure 8 Product Ballistics.....	32
Figure 9 Perspective.....	35
Figure 10 Effects .....	36

# Tables

Table 1 Innovation Ballistics .....	20
Table 2 Innovation Insights .....	24
Table 3 Conceptualise .....	28
Table 4 Idealise .....	32
Table 5 Transform.....	33

# Preface

When viewing Turner's Fighting Temeraire or Michelangelo's David, few would doubt the ability of art to inspire. The emotion engendered by the final departure of a proud warship tugged to its end or David's tangible curves, smoothed from solid marble, are without parallel. However art's exclusivity is also its fundamental weakness. Art has high barriers to entry; it requires inspiration, imagination, learned skills and innate abilities. Worse still at the highest level these skill combinations are extremely limited. Each generation is lucky to produce a handful of great artists.

Innovation too, is said to need inspiration, imagination, learned skills and innate abilities. Innovation is considered an art. This book maintains that Innovation cannot afford such exclusivity and this paradigm must be replaced. The alternative is to sit and wait for the next Great Master of Innovation like Darwin, Maxwell and Einstein or Technologists like Edison, Ford and Deming. Innovation need have no lofty goals and only one entry qualification, that it is useful.

This book applies this qualification throughout, it is written *to be useful - not true*. A probability, not a fact. On reflection it can be seen that all life is a "probability wave" not a predetermined equation. Even the great truths of Classical Physics bend before the Mechanics of the Quantum scale. No photon or electron is ever more precise than the occasion demands but you need not look to know where it will be, it will go where it is expected. Similarly the mind paints an impression of life with the gentle shades of memory conjured from the elements of experience. Precision is slow and unhelpful when you need to reuse recollections in fresh settings.

This book is a probability wave that lowers the bar on innovation by showing how ideas can be conjured at will to go where they are expected.

# Introduction

Innovation is still considered a black art, not a science. Progress a threat, not the hand that feeds us. Overlooked has been the simple fact that without innovation, the planet can perhaps feed only a few million hunter-gathers. With innovation, Earth can provide for a thousand times as many. *The difference is merely a different set of ideas.*

In the 300,000 years since the dawn of modern man there have been no revolutionary improvements in either material resources or human intellectual capability. The ability to exponentially multiply the population has arisen solely from innovations.

This book attempts to kill the idea that innovation is an art. It explains how the present paradigm of innovation can be replaced.

## Section 1 Theory

### Chapter.1 The Problem with Innovation today

#### The Innovation Paradigm

*Innovation is an art. Innovation cannot be learnt. Innovation has no system, or basic principles. Only gifted people can create. They create and we copy. They are the Gurus and we are the drones. Without people like Newton, Einstein, and Edison, the few that made it would still be living in caves.*

By the end of the book it should be clear that the above innovation paradigm has no validity. Innovation is a science and it is reproducible at will.

Scientific disciplines not only have a theoretical base to explain the cause and effect of the phenomena encountered but also a structural taxonomy to relate elements of the discipline.

We therefore need to move our thinking from art, to science. To follow the simple steps from where we are, to where we want to be. We need to understand how innovation works and what steps we can take to take to reproduce it. We need to start generating practical theories of Innovation with associated taxonomies of structure and a language of use. All such theories will have common elements. They will be an integrated process because Innovation is an integrated process, they will be constructive because they build upon experience, they will be deterministic because every step is logical and reproducible and they will be fast and forward moving.

The underlying basis for all such theories is the continuum of history from past to present and from theory to practice. The Innovation Continuum.

## Chapter.2 The Innovation Continuum

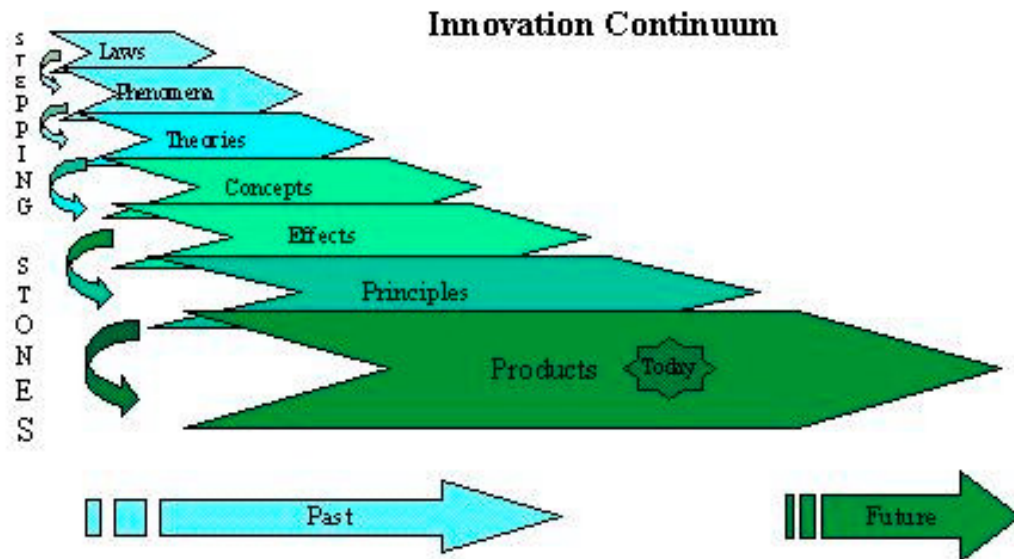


Figure 1 Innovation Continuum from Laws to Reality.

The Innovation Continuum is the basis for all efforts to rationalise material creativity into a scientific platform for future design. As you travel back along the continuum you drill down into the fundamental basis of all intelligent design – the laws of nature. This simplicity taken from natural events and interpreted into scientific laws, is however not the panacea it would first seem. The laws are so abstract when compared to day to day needs that it really would take the intellectual leap of a genius to bridge the gap.

The difficulty in innovation is twofold. The number of possibilities for combining laws that run a universe, with the demand vagaries of six billion people, is statistically overwhelming. Secondly, generating successful product designs from thin air with no design patterns, is the reason 250,000 years of pre history just resulted in a bow and arrow, a comb and some hopeless wall paintings.

## Stepping Stones

The innovation continuum has an answer for these difficulties - Stepping stones. Stepping stones are placed every time an idea proves useful and is shared. These stones together are called progress and they are the determinants of the past and future success of the human race.

Stepping Stones are proven ideas that :-

- Can include any Law, Theory, Concept, Product or Service.
- Are recorded and communicated in a useful form.

The fewer the stepping stones, the greater the innovative leap between the abstract and the practical, plus the greater the cost and risk involved. For instance, in times of war military innovation accelerates many fold because great leaps can be made without regard to cost. In war failure is not an option.

The more stepping stone paths followed the better the outcome. Having existing stepping stones in place means that following paths is quick and easy. And as Edison maintained, in the final analysis innovation is a numbers game, the more you try the more you get.

With stepping stones order and position is everything. You need to understand where each stone leads and in which order they are placed. If you want more concrete ideas you move towards the practical end and if you need conceptuality and wider applicability you move to the theoretical end. The law of conservation of momentum will explain many phenomena and in turn countless concepts so you need to get your ducks in a row.

Stepping stones have certain features that have kept progress painfully slow for millennia but show signs of exponential acceleration from here on in. Over the centuries there were few stepping stones but nothing to indicate an intellectual deficiency, so the dearth of technology would indicate communication has been the greater difficulty. Over the last few years the person to person communication explosion has driven this problem into the mists of time. Webs, mobiles, blogs, forums, books, and other media have multiplied the number of good ideas encountered and shared by an individuals on a daily basis.

Luckily, it seems, we are at the productive end of many years of an Innovation Continuum. For hundreds of years people have improved life with all manner of inventions and devices. Where we are now there is a (relative) abundance, produced by countless innovations. We are at the

event horizon of a thought timeline that results in milk bottles on the doorstep, mobile phones ringing in your pocket, intelligent agents on your desktop and electronic books on the Ipad.

At the start of this continuum are the laws of the universe and these laws go on to set the rules for everything that follows. Our task is simple, to make stepping-stones from the universal laws, all the way to the product we are improving at the sharp end.

To produce these stepping stones we have an embarrassment of riches. With over two thousand years of recorded history we have technologies that make magic look mundane.

So, rather than start from abstract scientific laws it's much better to focus on a concrete example from one of the millions of innovations we already use. This product focus gives a tangible beginning to what has until now, been a mysterious process. Allowing us to describe a straightforward set of steps leading from present reality to future products<sup>1</sup>, compounds our advantage.


## **Nesting**

Stepping stones are nested. They relate to the other elements multi-dimensionally, having causational and dependency links as well as the time ordered relations we see in the continuum. Although these other links can lead to the appearance of a chaotic system, the use of constraints and treatment of the stepping stones as information sources can identify the deterministic nature of this situation.

---

<sup>1</sup> Product always includes "Service" throughout this book. Products are just a physical manifestation of the real provision which is always a service. The customer buys what it does. That is what it is.




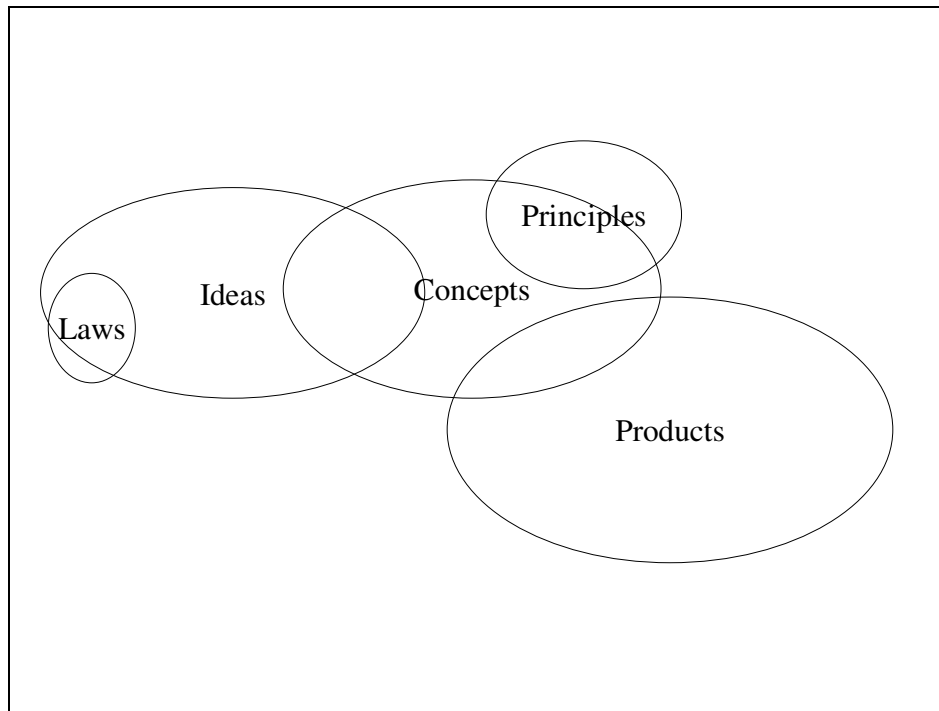

*Figure 2 Stepping Stone 3D Nesting*

## **Product Information Inheritance**

Products contain information, a lot of information. By their very existence products can tell you many useful things about concepts and customer needs. All products simultaneously monitor both these channels and as stepping stones in the continuum they also imply relations with the other steps.

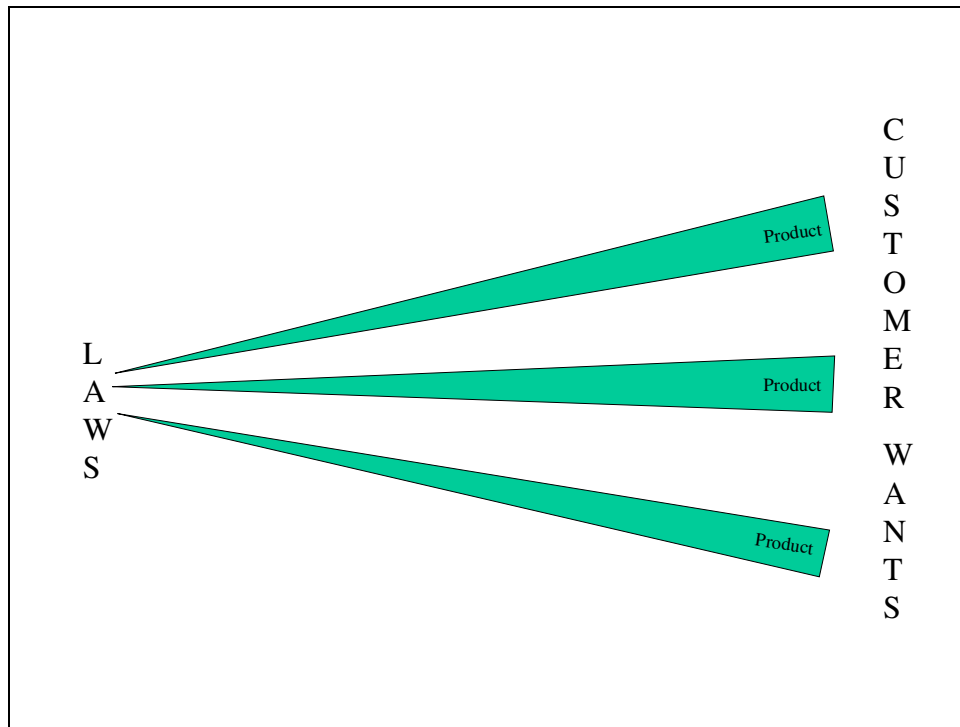

*Figure 3 Product Information Inheritance*

This information inheritance from other stepping stones (see Nesting) enables us to use the product as both a microscope on its past inheritance and a projector on its future. We can look back at the principles and concepts from which it evolved and project these evolutions onto the canvas of extended customer expectations.

If you were to find a sword from Roman times there is little doubt that before long archaeologists would have identified its known provenance, production technology, normal usage and what told us about the society within which it was used.

With modern products with a fully available provenance it rarely occurs to use to study a product as if it was from ancient times. Familiarity breeds contempt. A dustpan is just there. No thought is given to why it was originally created and what ideas over the years have been rejected in continuing to make it. A dustpan and brush has been in use since before Roman times and has been one of the most enduring designs but unless we dig one up it seems unlikely to be looked at with the archaeologists critical eye. In order to innovate we need to be product archaeologists.

## Innovation Ballistics

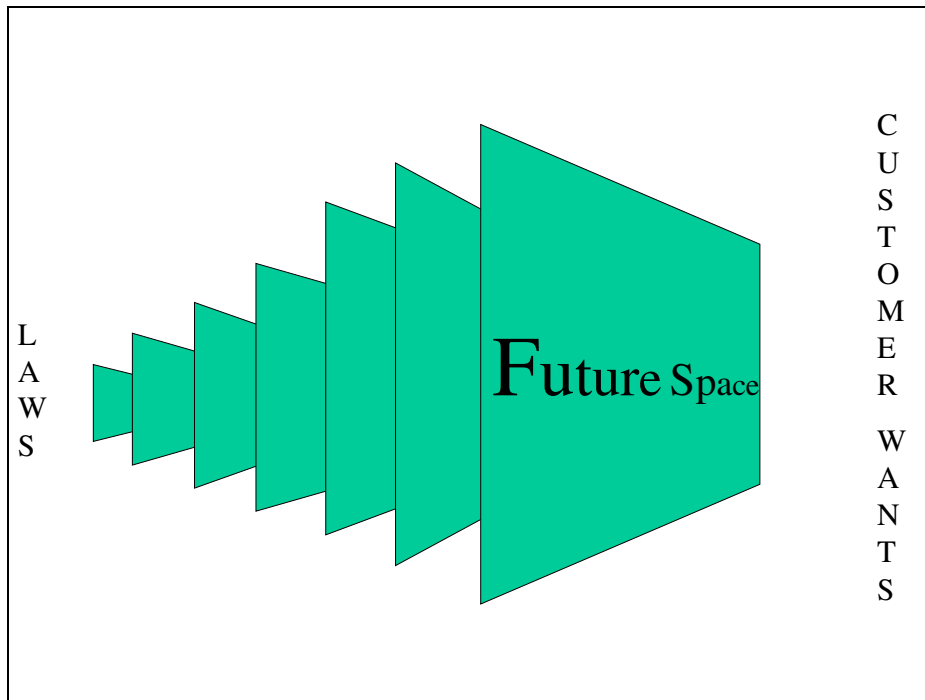


Figure 4 Innovation Ballistics

By Incorporating the ideas of stepping stone 3d nesting and information inheritance a new view on the Innovation Continuum is possible – the ballistic view. In this visualisation, a product or other stepping stone is traced along its transformational path showing the impact holes through a series of ideaspaces frames. This has the advantage of identifying the trajectory of the idea from its theoretical inception to the present product incarnation and off into the distant future.

Furthermore it “freeze frames” the causations and relations at the level of abstraction required.

Innovation Ballistics	
1	Shows the idea trajectory
2	Tracks into History
3	Projects into the Future
4	Freeze Frames causations
5	Identifies opportunities i.e. remaining ideaspaces in each frame

6	Offers a measure of innovation opportunity
7	Relates the abstract to the tangible.

Table 1 Innovation Ballistics

## Chapter.3 Analogy

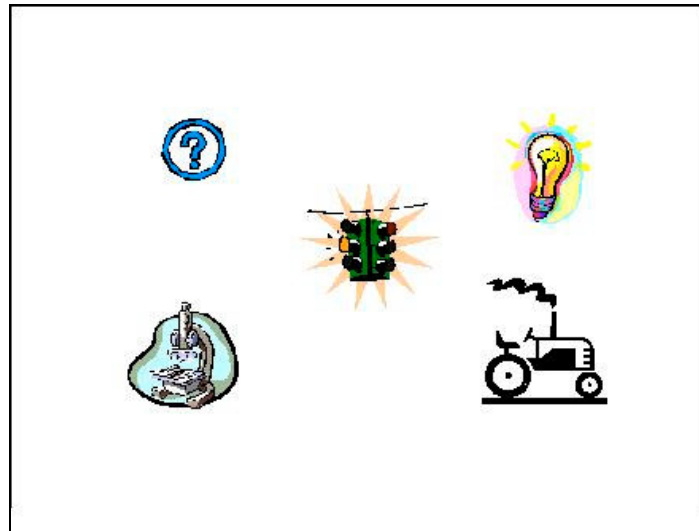


Figure 5 Analogy

*Our structure-mapping abilities constitute a rather remarkable talent. In creative thinking, analogies serve to highlight important commonalities, to project inferences, and to suggest new ways to represent the domains. Yet, it would be wrong to think of analogy as esoteric, the property of geniuses.*

Dedre Gentner and Arthur B. Markman

Analogy and similarity are central in cognitive processing. We store experiences in categories largely on the basis of their similarity to a category representation or to stored exemplars. New problems are solved using procedures taken from prior similar problems.

First, analogy is a device for conveying that two situations or domains share relational structure despite arbitrary degrees of difference in the objects that make up the domains. Common relations are essential to analogy; common

objects are not. This promoting of relations over objects makes analogy a useful cognitive device, for physical objects are normally highly salient in human processing - easy to focus on, recognize, encode, retrieve, and so on.

The process of comparison both in analogy and in similarity - operates so as to favour interconnected systems of relations and their arguments. As the above discussion shows, to capture the process of analogy, we must make assumptions not only about the processes of comparison, but about the nature of typical conceptual cognitive representations and how representations and processes interact. In particular, we must have a representational system that is sufficiently explicit about relational structure to express the causal dependencies that match across the domains. We need a representational scheme capable of expressing not only objects but also the relationships and bindings that hold between them, including higher Structure Mapping in Analogy and Similarity order relations such as causal relations.

There is, in general, an indefinite number of possible relations that an analogy could pick out, and most of these are ignored.

The defining characteristic of analogy is that it involves an alignment of relational structure. There are three psychological constraints on this alignment. First, the alignment must be structurally consistent. In other words, it must observe parallel connectivity and one-to-one correspondence. Parallel connectivity requires that matching relations must have matching arguments, and one-to-one correspondence limits any element in one representation to at most one matching element in the other representation structure. This also shows a second characteristic of analogy, namely, relational focus: As discussed above, analogies must involve common relations but need not involve common object descriptions. The final characteristic of analogy is systematicity: Analogies tend to match connected systems of relations. A matching set of relations interconnected by higher order constraining relations makes a better analogical match than an equal number of matching relations that are unconnected to each other. The systematicity principle captures a tacit preference for coherence and causal predictive power in analogical processing. We are not much interested in analogies that capture a series of coincidences, even if there are a great many of them.

In a study, people who were given analogous stories judged that corresponding sentences were more important when the corresponding sentence pairs were matching than when they were not. Alignable differences can be contrasted with nonalignable differences, which are aspects of one situation that have no correspondence at all in the other situation. This means that people should find it easier to list differences for pairs of similar items than for pairs of dissimilar items, because high-similarity pairs have many commonalities and, hence, many alignable differences.

Such a prediction runs against the common-sense view - and the most natural prediction of feature - intersection models - that it should be easier to list differences the more dissimilar the two items are. In a study by Gentner and Markman (1994), participants were given a page containing 40 word pairs, half similar and half dissimilar. The results provided strong evidence for the alignability predictions: Participants listed many more differences for similar pairs than for dissimilar pairs. It seems it is when a pair of items is similar that their differences are likely to be important.

Analogical Inference is another effect of use in delivering Innovation. Studies (Clement and Gentner 1991) show analogies lead to new inferences. In analogy, when there is a match between a base and target domain, matching facts about are accepted as candidate inferences. Mapping allows people to predict new information from old and will allow us to use analogy to suggest innovation options by using an existing product as a base domain.

Selecting existing product as a base domain has other benefits. According to structure-mapping theory, inferences are projected from the base to the target. Thus, having the more systematic and coherent item as the base maximises the amount of information that can be mapped from base to target. Consistent with this claim, Bowdle and Gentner found that when participants were given pairs of passages varying in their causal coherence, they (a) consistently preferred comparisons in which the more coherent passage was the base and the less coherent passage was the target, (b) generated more inferences from the more coherent passage to the less coherent one, and (c) rated comparisons with more coherent bases as more informative than the reverse comparisons. The inherent coherence of an existing product in its tangible and viable setting, makes it a superior option to a great leap forward from a law or technological advance.

It is possible that conventional analogies have their metaphoric meanings stored lexically, making it unnecessary to carry out a mental domain mapping. This could be the reason that it is easier to extend an existing domain mapping than to initiate a new one. For example, when electric current is described throughout a passage using the extended analogy of water flow.

Innovators are called on to map information from one situation to another and they must decide which aspects of their prior knowledge apply to the new situation. Schumacher and Gentner (1988) found the speed of learning was affected both by transparency (i.e. resemblances between structurally corresponding elements) and by systematicity (i.e. when they had learned a causal

explanation for the procedures). Having a strong causal model can enable innovation even when the objects mismatch perceptually. Both transparency and systematicity are facilitated by drawing analogy between products.

Several findings suggest that similarity-based retrieval from long-term memory is based on overall similarity, with surface similarity heavily weighted. a parallel disassociation has been found in problem-solving transfer: Retrieval likelihood is sensitive to surface similarity, whereas likelihood of successful problem solving is sensitive to structural similarity. This suggests that different kinds of similarity have different psychological roles in transfer. For instance studies of relational comparisons suggest that when participants are required to respond quickly, they base their sense of similarity on local matches rather than on relational matches. At longer response deadlines, this pattern is reversed.

Structural alignment influences which features to pay attention to in choice options. Research suggests that alignable differences are given more weight in choice situations than are nonalignable differences.

In order to find concepts for transforming products the prime method available is to draw analogy with concepts used by other products. Analogy is particularly well suited because of the way the mind builds ideas from images and memory fragments.

Analogy is the quality or state of being alike or: affinity, likeness, comparison, correspondence, likeness, parallelism, resemblance, similarity, similitude, uniformity, uniformness. Analogies can be used to group analogous relationships into five categories: descriptive, comparative, categorical, serial, and causal.

In our example, we might draw the analogy between the Dustpan and a rotary street sweeper and consider contra-rotating brushes on the brush handle that sweep together as the brush is pulled.

Analogy is about finding similarities, categorizing, and making comparisons.

## **Chapter.4   Insights**

Comparison processes foster insight. Analogies highlight commonalities and relevant differences, they invite new inferences, and they promote new ways of construing situations.

Insights are somewhat overlooked stepping stones on the Innovation Continuum. Insights are the distillation of useful concepts from a product or service into principles of value added design or competitive advantage for that opportunity. They are the unique selling propositions that identify an innovative possibility.

The concepts behind Innovation itself can be analysed into Insights in order to identify how it can be improved.

<b>Innovation Insights</b>	
1	Innovation is a continuum
2	Innovation builds on previous knowledge
3	Innovation must be communicated
4	All innovations are logical in retrospect.
5	Innovation looks like magic because it is asymmetrical. It looks easier from the result than from a theory.
6	Innovation is designed for people.
7	There are few natural laws but countless applications
8	Innovation processes are considered mysterious.
9	Small innovation steps are easier than big ones
10	The more innovations you try the more products you get.

*Table 2 Innovation Insights*

## **Chapter.5 Constraints and Options**

Both constraints and options are potentially positive for innovation. Constraints allow focus and avoid wasted effort. Options increase possibilities.



These factors are symbiotic. If options are increased in the absence of constraints then innovation will become a lottery. If constraints are increased to the exclusion of options then little will result.


Constraints should be set to inform and direct the conceptual analysis but not exclude viable possibilities. Options should be maximised within the constrained framework by analogy techniques (see Analogy Patterns below).

## **Chapter.6    Ontology, Taxonomies & Language**

As stated at the start the lack of a scientific basis for Innovation has some less expected results. Scientific disciplines not only need an ontology and theoretical base to explain the cause and effect of the phenomena encountered but also a structural taxonomy to relate elements of the discipline.

An ontology is a conceptualisation of a knowledge domain, a controlled vocabulary that describes objects and the relations between them in a formal way, and has a grammar for using the vocabulary terms to express something meaningful within a specified domain of interest. The vocabulary is used to make queries and assertions. Ontological commitments are agreements to use the vocabulary in a consistent way for knowledge sharing

The Innovation continuum relates the main elements of the process as to the order, ownership and direction of development. The book is a definition of the objects and the relations between them in *an informal way in order* to be useful. The next book in the series integrates the continuum in a formal manner.

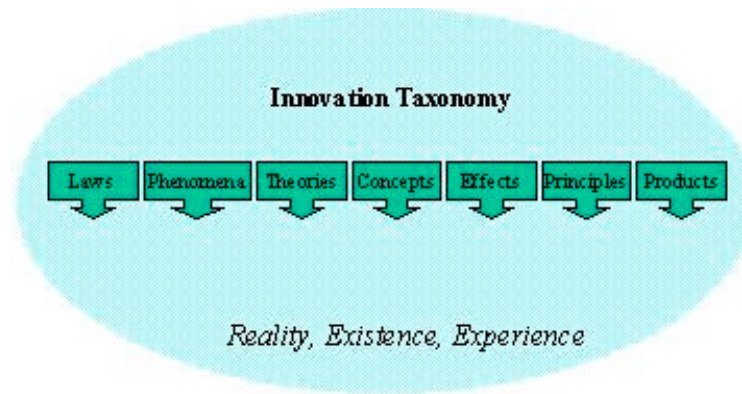

*Figure 6 Innovation Taxonomy*

Another problem with present day Innovation is that its low defusion into the general population means that the variety of vocabulary is limited. Historically there has not been as much call for the language of innovation as for agricultural, building or even industrial terminology. This is a significant problem in the age of search engines and databases. Inappropriate taxonomies and insufficient vocabulary are causing difficulty in accessing and applying knowledge in the innovation arena. The Inuit have more terms for snow than industrial societies have for innovation.

This problem is addressed in the language section of the appendix by collecting terms from associated disciplines and co-opting appealing terms from the major languages.

## Section 2 Practice

### Chapter.7 Three Steps to Innovation

#### Step One – Conceptualise.

#### What does the product do?

Take any product (or service) and ask “What does it to do?”

Identify the key concepts that the product uses to get the job done. Concepts generalise the effect of the product so they can be applied elsewhere. A hammer uses the centrifugal effect of a heavy weight at the end of a shaft. A vacuum cleaner separates dust from floors by using air as a transport.

#### Step Two – Idealise.

#### What do you want it to do?

Take the product or service and ask “What do you want it to do?”

You will want to do more with less. You may want to avoid a problem, like the hammer hitting your thumb or add in additional stages to the process, like separating the vacuum cleaner from the dust when its finished!

#### Step Three – Transform.

#### Change the concept

Simply swop over the concepts used in the original product to achieve the new one.

The concepts are all readily available along the innovation continuum. That’s it. Three stages that change the product concept to do more with less.

The rest of the book explains the concept changing process and how to make the steps easier.

## Chapter.8 Conceptualise



Figure 7 Dustpan and Brush

<i>Conceptualise</i>	<i>Product: Dust Pan and Brush</i>
<i>What does it to do?</i>	Separates dust from floors
<i>Make Concept 1</i>	Brush multiple bristles effectively move dust from uneven floors without damaging surfaces.
<i>Make Concept 2</i>	Pan ramp permits only inwards dust movement
<i>Move Concept 1</i>	Pan sides and cover hold in dust during movement
<i>Move Concept 2</i>	Pan Handle allows ramp location and pan emptying
<i>Strengths</i>	Simple, Cheap,
<i>Weaknesses</i>	Manual, Dusty,

Table 3 Conceptualise

### 1.8.1.1 Using Analogies

When studying innovation the only reason for us to use an analogy is to access ideas not otherwise available. As we have seen the mind works with analogies to perform cognitive functions, storing memories by association rather than index. This makes it a far more powerful parallel processor than its raw specification would imply. The mind cannot compete with the

cycles per second or memory register of even the most basic PC but its ability to associate gives it a unique capability in forming connections.

We do not have the design capability to design a similar electronic computer but we can use analogy to access the one we have each been given – the brain.

Altschuller, De Bono and others have suggested patterns for accessing the brain's associative powers. One of the aims of this book is to delve deeper into this pattern forming function and see if we can understand how to find what we want, when we want.

The success of all the other concepts in the book are dependent on this accessing of information because no matter what stepping stones exist, something must associate them in a constructive manner. I hasten to say we are not back in Michelangelo territory, as the suggested analogic processes should be able to deliver high quality options needing fast comparison of viability not pure blue sky generation. If such association and appraisal could be encapsulated in a software program it would be a valuable asset. However it is not necessary, as by using the right analogies, each of us can follow steps to derive the most satisfactory inventive designs.

## **Analogy Patterns**

Analogies simplify information access by interconnecting relations between entities and ignoring extraneous factors. This simplification is actually adding tremendous value for innovation. A computer could store all the related aspects of millions of objects but the mind stores the useful relations. This makes recall easier but also highlights only the useful concepts. The 3C's of analogy patterns are:-

### *1.8.1.2 Comparative (Resemblances)*

Comparative elements of the entities can be matched by analogy. The use of the term “than” to connect the statements is all that is required.

Taller than the Eiffel tower. Bigger than a football pitch. Thinner than a human hair.

### *1.8.1.3 Categorical*

Categorising into a framework enables this patterning approach. The tree like structure is the mind's default but any structure can be invoked. Merely state or imply the structure and elements.

A type of orange. The fastest computer. One of the first year student's

### *1.8.1.4 Causal (Systemacity)*

Cause effect relations are crucial to innovation. Luckily (well its not luck actually it was built that way) the brain establishes causal links as the base for memory.

Switch and a light. Run along a road. Gravity and weight. Police and behave yourself.

## **Memory Systems & Heuristics**

Knowing the 3c's is of less use if you don't have a key to unlocking them. This is where a certain amount of genius has been shown in deriving systems to access the mind's analogies directly rather than rely on the logical forms that work so poorly.

For instance, losing your car keys is not helped by the inevitable suggestions to look where you had them last. Better still to put the keys out of your mind and employ analogical approaches that move the focus to other entities that have a symbiotic relation with the keys and track their them i.e. the car, your coat, your routine paths and actions, door locks etc Alternatively build an analogical model of every event around the key use but avoiding the now emotionally blocked memory of the keys themselves.

On a more serious note Altschuller, Buzan and De Bono all created analogical memory systems for storing and accessing innovative ideas. All of these systems use pattern analogies for each of the 3C's.

- Altschuller's Triz 40 principles
- Buzan's Memory Maps
- De Bono's CoRT lessons

They each allow transformation of ideas by applying a memorable but flexible pattern. Whether to perform a PMI (Plus , Minus Interesting), contract a mind map of relations, or consider the effect of Matreska (a doll within a doll). The brain already has these relations stored and is very pleased to be asked to use them instead of facing yet another mountain of useless information.

These pattern systems are applicable to any innovation stage. They are the equivalent of using a Google interface for the mind when up until now you thought you had to learn Cobol queries.

These and similar patterns will access and store any comparative, categorical, or causal analogy in the mind. That's everything; nothing's in tables, it's all in analogies.

I'm surprised that this isn't the biggest area of research in Universities, enhancing the language for interfacing with the brain seems quite important but just like Mr De Bono, it seems we are to be disappointed in this area.

I won't attempt to summarise the systems here but the reference list includes the keynote books.

## **Product Archeology**

Product Archeology enables us to use the product as both a microscope on its past and a projector on its future. We can look back at the principles and concepts from which it evolved and project these evolutions into the future.

Taking an existing product you need to identify its provenance, production technology, normal usage and what it tell us about its usage.

## **Product Ballistics**

Using information and by following relations and from the archeology, we can extract each of the freeze frames along the product trajectory. We can identify features, generalise them to remove artifacts and distill them back into their concepts and then laws. We should be left with a set of cards showing two dimensional relations in place of the network of three dimensional nested relationships. It is difficult to conceive of three dimensional relationships, so this

simplification will gain more in value than it loses in information.

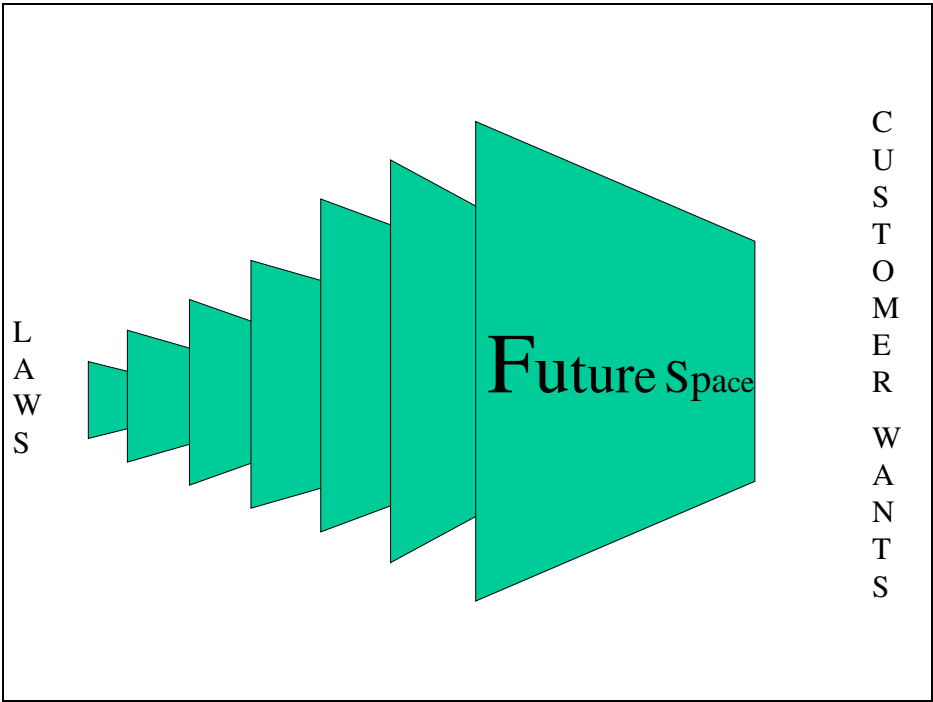


Figure 8 Product Ballistics

The number of abstractions required and the relations mapped is solely determined by the use to which the ballistic track is being put. If we have a space shuttle and we would like it to indicate our development trajectory for space then we will end up with sub tracks for each of the key elements (configuration, dynamics, objectives). Our dustpan has a considerable provenance but a single track with a few frames should suffice.

## Chapter.9 Idealise

<i>Idealise</i>	<i>Product: Dust Pan and Brush</i>
	<i>Removal of Weaknesses and Extension of Process</i>
<i>What do you want it to do?</i>	Remove dust from floors to bin without pushing dust into air.

Table 4 Idealise



## Ideality and IFR

The Law of Increasing Ideality. This law states that technical systems evolve toward increasing degrees of ideality, where ideality is defined as the quotient of the sum of the **system's useful effects, divided by the sum of its harmful effects**

Useful effects include all the valuable results of the system's functioning. Harmful effects include undesired inputs such as cost, footprint, energy consumed, pollution, danger, etc. The ideal state is one where there are only benefits and no harmful effects. It is to this state that product systems will evolve. From a design point of view, engineers must continue to pursue greater benefits and reduce cost of labour, materials, energy, and harmful side effects. Normally, when improving a benefit results in increased harmful effects, a trade-off is made, but the Law of Ideality drives designs to eliminate or solve any trade-offs or design contradictions. The ideal final result will eventually be a product where the beneficial function exists but the machine itself does not. The evolution of the mechanical spring-driven watch into the electronic quartz crystal watch is an example of moving towards ideality.

## Chapter.10 Transform

<i>Transform</i>	<i>Product: Dust Pan and Brush</i>
<i>Idealise</i>	Separates dust from floors
<i>Make Concept 1</i>	Drag Contra Rotate twin round brushes
<i>Make Concept 2</i>	Static charging polymer attracting dustpan
<i>Move Concept 1</i>	Flexible roll-up dustpan trapping
<i>Move Concept 2</i>	Water mist trap, liquid hold and pour away dust

Table 5 Transform

## Concept Changing

The basic concepts are the laws of nature but more conveniently these have been turned into more and more specific stepping stones along the innovation continuum. At the scientific end, concepts have universal applicability but no application detail. At the real world end, the concepts are incorporated into specific applications that are the excellent 3 dimensional examples of possible applications you can use. The more scientific and groundbreaking you wish to be the more stepping stones you go back. The best thing about all this is that all the concepts you ever need are freely available in books, websites and brochures. The concepts cannot even be monopolised by patents, only the useful device is patentable not the idea.

To simplify things still more there are several processes that help generate ideas by using the mind's unique pattern making abilities.

## Make and Move

Remember innovations are just make and move machines. You need only explain the concepts used to make its useful outcome and move it.

Whether innovation is in transport, television pictures, or take over bids, realisation will involve just two stages - make and move. Innovation is the art of conceiving “make and move” machines. A car is built then transported to customers, a television picture is shot and transmitted, take over bids are created then released.

All things “make and move”. Nothing less, nothing more. Things are made then moved for use and continue to make and move during their life.

The aim of innovation is to design these machines to make more with less.

## Perspective



*Figure 9 Perspective*

Perspective in theory of cognition is the choice of a context or a reference (or the result of this choice) from which to sense, categorise, measure or codify experience, typically for comparing with another. One may further recognize a number of subtly distinctive meanings, close to those of point of view, Weltanschauung, or paradigm.

To choose a perspective is to choose a value system. When we look at a business perspective, we are looking at a monetary base values system. When we look at a human perspective, it is a more social value system.

The design methodology utilises attention focusing "perspectives" to increase innovation and allow for the difference in reality depending on personal narrative, perception, and aspect. Selection of perspective is dependent on the stage, business philosophy, risk return attitude and familiarity.

In innovation a vantage point for the perspective is selected. A vantage point is a position that affords a broad overall view or perspective, as of a place or situation.

Perspective enables the innovator to instantly access sets of analogies. Perspective is the viewpoint of an actor within the process such as a teenage customer, a specialist or a combination character. The advantage of taking perspectives is that it affords an holistic, animated, and end to end process input into the transformation.

In our example, we might think how the Dustpan might be difficult to use by a frail older person bending to clear up breadcrumbs from the kitchen floor.

## Effects Database



*Figure 10 Effects*

Reuse is the key to innovation. Little, if anything, is ever designed that doesn't incorporate past principles and concepts. The effects database takes useful concepts from the past and states their useful effects in a reusable way. The effects can be anything in the field of innovation that can be used in make and move machines.

In our example the effect of static electricity that can build up from rubbing a non conducting material like a plastic dustpan might well be of interest.

## Principles

### 1.10.1.1 Conceptualise

1.10.1.1.1 *Is it useful?*

1.10.1.1.2 *Work backwards from the result*

1.10.1.1.3 *Make more with less*

### 1.10.1.2 Idealise

1.10.1.2.1 *IFR Ideal Final Result*

1.10.1.2.2 *Think of 10 ideas choose 1.*

1.10.1.2.3 *Only make what you can't steal*

1.10.1.2.4 *Create options.*

1.10.1.2.5 *Pre-empt the future.*

1.10.1.2.6 *Reuse everything*

### 1.10.1.3 Transform

1.10.1.3.1 *Invisible innovations*

1.10.1.3.2 *Massively parallel working*

1.10.1.3.3 *Next time faster*

## Chapter.11 Appendix

### Source methods

#### *1.11.1.1 FWTC*

An alternative breakthrough business improvement methodology. The Fastest way to certainty encapsulates the Customer story in the fewest steps possible to meet their needs. By applying many differing perspectives, the Fastest way to certainty approach, builds a funnel that turns Customer opportunities into certainties.

Fastest way to certainty is the corollary of the approach given in this book. Whereas both operate in the innovation continuum, Fastest way to certainty starts with the World and works forward to certainty rather than starting with certainty (a product), as we do here. Refer FWTC Fastest way to certainty 2005 for further details.

#### *1.11.1.2 QFD - Quality Function Deployment*

Quality Function Deployment is the best approach for linking the objectives of inbound marketing with the requirements of engineering - in other words, converting customer wishes into specific corporate goals so that product/process designers know the right things to do.

Voice of the Customer is the cornerstone of developing any winning product or service, and how to gather the VOC is one of the biggest differences between QFD and traditional practices.

Traditionally, companies utilize marketing and customer service functions to obtain customer information - their wants and don't wants (complaints). While this information is important, it does not address the whole picture .

Based on the Kano Model in QFD, there is a lot more than what the customers are saying. The Kano Model was developed by Dr Kano in Japan while he was researching customer requirements for commercial airliners. The Kano Model is an axes system where the horizontal axis represents the level of a company's fulfilment regarding a given customer want - not fulfilled at all on the left side to fulfilled completely on the right side - and the vertical represents the degree of customer satisfaction - very satisfied at the top to very dissatisfied at the bottom .

#### *1.11.1.3 Synectics*

Synectics is an problem solving approach (rather method or system) consisting of problem-stating and problem-solution based on creative thinking that involves free use of metaphor and

analogy in informal interchange within a carefully selected group of individuals of diverse personality and areas of specialisation.

Synectics is a relatively unknown problem solving approach that stimulates thought processes of which the subject is generally unaware. This method, developed by William Gordon, has as its central principle: "Trust things that are alien, and alienate things that are trusted." This encourages, on the one hand, fundamental problem-analysis and, on the other hand, the alienation of the original problem through the creation of analogies. It is thus possible for new and surprising solutions to emerge. Synectics is more demanding of the subject than brainstorming, as the many steps involved mean that the process is more complicated and requires more time and effort.

#### *1.11.1.3.1 Procedure*

Analysis and definition of the problem

Spontaneous solutions

Reformulation of the problem

Creation of direct analogies

Personal analogies (identification)

Symbolic analogies (contradictions)

Direct analogies

Analysis of the direct analogies

Application to the problem

Development of possible solutions

#### *1.11.1.4 Triz*

40 Innovation principles.

By Genrich S. Altshuller, born in the former Soviet Union in 1926. His first invention, for scuba diving, was when he was only 14 years old. His hobby led him to pursue a career as a mechanical engineer. Serving in the Soviet Navy as a patent expert in the 1940s, his job was to

help inventors apply for patents. He found, however, that often he was asked to assist in solving problems as well. His curiosity about problem solving led him to search for standard methods. What he found were the psychological tools that did not meet the rigors of inventing in the 20th century. At a minimum, Altshuller felt a theory of invention should satisfy the following conditions:

1. be a systematic, step-by-step procedure
2. be a guide through a broad solution space to direct to the ideal solution
3. be repeatable and reliable and not dependent on psychological tools
4. be able to access the body of inventive knowledge
5. be able to add to the body of inventive knowledge
6. be familiar enough to inventors by following the general approach to problem solving

Altshuller screened over 200,000 patents looking for inventive problems and how they were solved. Of these (over 1,500,000 patents have now been screened), only 40,000 had somewhat inventive solutions; the rest were straight forward improvements. Altshuller more clearly defined an inventive problem as one in which the solution causes another problem to appear, such as increasing the strength of a metal plate causing its weight to get heavier. Usually, inventors must resort to a trade-off and compromise between the features and thus do not achieve an ideal solution. In his study of patents, Altshuller found that many described a solution that eliminated or resolved the contradiction and required no trade-off.

Altshuller categorised these patents in a novel way. Instead of classifying them by industry, such as automotive, aerospace, etc., he removed the subject matter to uncover the problem solving process. He found that often the same problems had been solved over and over again using one of only forty fundamental inventive principles. If only later inventors had knowledge of the work of earlier ones, solutions could have been discovered more quickly and efficiently.

In the 1960s and 1970s, he categorised the solutions into five levels.

\* Level one. Routine design problems solved by methods well known within the speciality. No invention needed. About 32% of the solutions fell into this level.

\* Level two. Minor improvements to an existing system, by methods known within the industry. Usually with some compromise. About 45% of the solutions fell into this level.



\* Level three. Fundamental improvement to an existing system, by methods known outside the industry. Contradictions resolved. About 18% of the solutions fell into this category.

\* Level four. A new generation that uses a new principle to perform the primary functions of the system. Solution found more in science than in technology. About 4% of the solutions fell into this category.

\* Level five. A rare scientific discovery or pioneering invention of essentially a new system. About 1% of the solutions fell into this category.

He also noted that with each succeeding level, the source of the solution required broader knowledge and more solutions to consider before an ideal one could be found.

What Altshuller tabulated was that over 90% of the problems engineers faced had been solved somewhere before. If engineers could follow a path to an ideal solution, starting with the lowest level, their personal knowledge and experience, and working their way to higher levels, most of the solutions could be derived from knowledge already present in the company, industry, or in another industry.

For example, a problem in using artificial diamonds for tool making is the existence of invisible fractures. Traditional diamond cutting methods often resulted in new fractures which did not show up until the diamond was in use. What was needed was a way to split the diamond crystals along their natural fractures without causing additional damage. A method used in food canning to split green peppers and remove the seeds was used. In this process, peppers are placed in a hermetic chamber to which air pressure is increased to 8 atmospheres. The peppers shrink and fracture at the stem. Then the pressure is rapidly dropped causing the peppers to burst at the weakest point and the seed pod to be ejected. A similar technique applied to diamond cutting resulted in the crystals splitting along their natural fracture lines with no additional damage.

Altshuller distilled the problems, contradictions, and solutions in these patents into a theory of inventive problem solving which he named TRIZ.

#### *1.11.1.5 De Bono*

Maltese Physician Edward De Bono (born 1933) writes prolifically on the subject of thinking and conducts training in the same field. Many people know him as having coined the term lateral thinking, of which they consider him the pioneer.

In 1969 De Bono founded the Cognitive Research Trust (CoRT) which continues to produce and promote material based on his ideas. He has written "62 books with translations into 37 languages". He has spent the last 30 years teaching thinking, including working with governments, corporations, organisations and individuals, speaking publicly or privately on many matters. He has started to set up SITO - the 'Supranational Independent Thinking Organisation' based in Malta, which he describes as a "kind of intellectual Red Cross".

De Bono has detailed a range of 'deliberate thinking methods' - applications emphasizing thinking as a deliberate act rather than a reactive one. He uses a clear and practical writing style. Avoiding academic terminology, he has advanced applied psychology by making theories about creativity and perception into usable tools. He does not reference others' epistemology, preferring instead to build upon his own (the main tenets in his book *The Mechanism of the Mind* (1969) underpin all his subsequent work). This self-referential style has helped define the published genre of popular psychology.

De Bono's work has become particularly popular in the sphere of business - perhaps because of the perceived need to restructure corporations, to allow more flexible working practices and to innovate in products and services. The methods have migrated into corporate training courses designed to help employees and executives 'think outside the box'.

De Bono has a network of trainers who administer officially-trained De Bono thinking methods, but many other trainers will use them or parts of them even when not specifically trained..

#### *1.11.1.6 Buzan*

Tony Buzan (1942-) is the original promoter of mind mapping and coined the term mental literacy. He was born in London and received double Honours in psychology, English, mathematics and the General Sciences from the University of British Columbia in 1964. He is probably best known for his book, *Make the Most of Your Mind*, his promotion of mnemonic systems and his mind-mapping techniques.

Following his 1970s series for the BBC, many of his ideas have been set into his series of five books: *Use Your Memory*, *Master Your Memory*, *Use Your Head*, *The Speed Reading Book* and *The Mind Map Book*.

He has gained somewhat of a cult following due to his evangelical and promotional vision of world mental literacy, spiritual intelligence, and sensual intelligence, among other controversial

topics such as mental stimulation through sensuality, synchronization of left and right brain, and the belief in intellectual abundance. As such, he is often known as the "mind map guru". A great deal of his ideas have originated in debunked pseudoscience, and more recently, the rhetorical re-definition of multiple intelligences by Howard Gardner.

#### *1.11.1.7 Disruptive Technology?*

A disruptive technology is a new technological innovation, product, or service that eventually overturns the existing dominant technology in the market, despite the fact that the disruptive technology is both radically different than the leading technology and that it often initially performs worse than the leading technology according to existing measures of performance. A disruptive technology comes to dominate an existing market by either filling a role in a new market that the older technology could not fill or by successively moving up-market through performance improvements until finally displacing the market incumbents.

Disruptive technology, was a concept put forth by Harvard Business School professor Clayton Christensen and explained in his book *The Innovator's Dilemma*. A disruptive technology is defined as a low-performance, less expensive technology that enters a heated-up scene where the established technology is outpacing people's ability to adapt to it. The new technology gains a foothold, continues to improve, and then bumps the older, once-better technology into oblivion. Sounds good. The problem is that there is not one example of this ever happening. The theory goes on and on, with a seemingly reasoned explanation of how this unfolds. Christensen says the idea stems from his fascination with the collapse of Digital Equipment Corp. The microcomputer came along as the cheap, inferior, disruptive technology, eventually supplanting the mini. No matter that HP, IBM, and Sun continued to prosper selling "minicomputers"

The microcomputer was never a "less expensive" and "inferior" replacement for minicomputers. It was a more expensive and superior replacement for calculators and slide rules. It was never used "instead of" a minicomputer (or mainframe for that matter) but "in addition to." Even the spreadsheet, which is what actually made the desktop computer popular, had no real antecedent except a pad and pen. It didn't replace anything better.

#### *1.11.1.8 Dawkins*

Meme

British biologist and author, introduced the concept of a "meme" in *The Selfish Gene* (Oxford Univ. Press, 1976). With Oliver Goodenough, interpreted a DL letter using viral analogies ("The St. Jude Mind Virus," *Nature*, Sept. 1, 1994).

As defined in *The Selfish Gene* "a unit of cultural transmission, or a unit of imitation."

"Examples of memes are tunes, ideas, catch-phrases, clothes fashions, ways of making pots or of building arches. Just as genes propagate themselves in the gene pool by leaping from body to body via sperms or eggs, so memes propagate themselves in the meme pool by leaping from brain to brain via a process which, in the broad sense, can be called imitation.

#### *1.11.1.9 Induced innovation*

Induced innovation is a macroeconomic hypothesis first proposed in 1932 by Dr. J. R. Hicks in his work *The Theory of Wages*. He proposed that "a change in the relative prices of the factors of production is itself a spur to invention, and to invention of a particular kind—directed to economising the use of a factor which has become relatively expensive."

Considerable literature has been produced on this hypothesis, which is often presented in terms of the effects of wage increases as an encouragement to labour-saving innovation. The hypothesis has also been applied to viewing increases in energy costs as a motivation for a more rapid improvement in energy efficiency of goods than would normally occur.

#### *1.11.1.10 Innovation diffusion*

Diffusion is the process by which a new idea or new product is accepted by the market. The rate of diffusion is the speed that the new idea spreads from one consumer to the next.

##### *1.11.1.10.1 Models of diffusion*

There are several theories that purport to explain the mechanics of diffusion:

1) The two-step hypothesis - information and acceptance flows, via the media, first to opinion leaders, then to the general population

2) The trickle-down theory - products tend to be expensive at first, and therefore only accessible to the wealthy social strata - in time they become less expensive and are diffused to lower and lower strata

3) The Everett Rogers Diffusion of innovations theory - for any given product category, there are five categories of product adopters:

innovators

venturesome, educated, multiple info sources

early adopters

social leaders, popular, educated

early majority

deliberate, many informal social contacts

late majority

sceptical, traditional, lower socio-economic status

laggards

neighbours and friends are main info sources, fear of debt

4) Crossing the Chasm model developed by G. Moore - This is basically a modification of Everett Rogers' theory applied to technology markets and with a chasm added. According to Moore, the marketer should focus on one group of customers at a time, using each group as a base for marketing to the next group.

The most difficult step is making the transition between visionaries (early adopters) and pragmatists (early majority). This is the chasm that he refers to. If successful a firm can create a bandwagon effect in which the momentum builds and the product becomes a defacto standard.

5) Technology driven models - These are particularly relevant to software diffusion. The rate of acceptance of technology is determined by factors such as ease of use and usefulness.

#### *1.11.1.10.2 The rate of diffusion*

According to Everett M. Rogers, the rate of diffusion is influenced by:

the product's perceived advantage or benefit

riskiness of purchase

ease of product use - complexity of the product

immediacy of benefits

observability

trialability

price

extent of behavioural changes required

return on investment in the case of industrial products

#### *1.11.1.10.3 Diffusion rate models*

There are several types of diffusion rate models:

1) Penetration models - use test market data to develop acceptance equations of expected sales volume as a function of time - Three examples of penetration models are:

Bass trial only model

Bass declining trial model

Fourt and Woodlock model

2) Trial/Repeat models - number of repeat buyers is a function of the number of trial buyers

3) Deterministic models - assess number of buyers at various states of acceptance  
- later states are determined from calculations to previous states

4) Stochastic models - recognize that many elements of the diffusion process are unknown but explicitly incorporate probabilistic terms

## Language

Innovate	Create
Machine	Idea
Brainchild	Brainwave
Notion	Perception
Vision	Design
Ideation	Inspiration
A Bluski – First new product in new field. (source Blue sky).	To Storm – Brainstorm ideas (source Brainstorm).
V8 or Visionate – To envision new ideas (source vision innovate)	Ultravez Think of something more extreme (source Spanish)
Evangineer - A person who seeks to change some aspect of society and who has the high level of technical expertise required to make that change	Disruptive
Yestertech	
<b>Analogy</b>	
<p>alike, comparable, corresponding, equivalent, like, parallel, similar, uniform., contrast, difference , distinction , inequality, uniqueness, variation, variety, different, distinct, distinctive, uneven, unique, various, versatile, differ, distinguish , substitute, counterpart, couple, double , equivalence, integration, likeness, mate, mimic, model, parallel, peer, precedent, sameness, equal, even, imitative, like,</p> <p><a href="#">/main/ntquery?method=4&amp;dsid=2083&amp;dekey=L0918500&amp;gwp=8&amp;curtab=2083_1</a>same, symmetrical, twin, copy, echo, equalise, follow, imitate, integrate, liken, copy, comparative, typical, associate, compare</p>	

## Effects Database (extract)

ID	Element	Type	Field
<b>Building</b>			
1916	ridge pole	Effect	Building
The horizontal supporting member placed along the ridge of a roof.			
7165	king post truss	Effect	Building
A wooden roof truss having two principal rafters held by a horizontal tie beam, a king post upright between tie beam and ridge, and usually two struts to the rafters from a thickening at the king post foot.			
<b>Chemical Engineering</b>			
4924	oxo process	Effect	Chemical Engineering
Catalytic process for production of alcohols, aldehydes, and other oxygenated organic compounds by reaction of olefin vapors with carbon monoxide and hydrogen.			
3330	Reich process	Effect	Chemical Engineering
Process to purify carbon dioxide produced during fermentation; organic impurities in the gas are oxidized and absorbed, then the gas is dehydrated.			
13379	Wulff process	Effect	Chemical Engineering
A chemical process to make acetylene and ethylene by cracking a hydrocarbon gas (for example, butane) with high-temperature steam in a regenerative furnace.			
3796	low-temperature carbonization	Effect	Chemical Engineering
Low-temperature destructive distillation of coal to produce liquid products.			
8357	wetting agent	Effect	Chemical Engineering



A substance that increases the rate at which a liquid spreads across a surface when it is added to the liquid in small amounts.

12134	Reppe process	Effect	Chemical Engineering
-------	---------------	--------	----------------------

A family of high pressure, catalytic acetylene-reaction processes yielding (depending upon what the acetylene reacts with) butadiene, allyl alcohol, acrylonitrile, vinyl ethers and derivatives, acrylic acid esters, cyclo octatraene, and resins.

620	Ostwald process	Effect	Chemical Engineering
-----	-----------------	--------	----------------------

An industrial preparation of nitric acid by the oxidation of ammonia; the oxidation takes place in successive stages to nitric

oxide, nitrogen dioxide, and nitric acid; a catalyst of platinum gauze is used and high temperatures are needed.

8895	Ziegler process	Effect	Chemical Engineering
------	-----------------	--------	----------------------

A process for the low-pressure linear polymerization of ethylene and stereospecific polymerization of propylene; the product is a high-density polymer or elastomer. zigzag rule

7119	MMSCFH	Law	Chemical Engineering
------	--------	-----	----------------------

Abbreviation for million standard cubic feet per hour; usually refers to gas flow.

7118	MMSCFM	Law	Chemical Engineering
------	--------	-----	----------------------

Abbreviation for million standard cubic feet per minute; usually refers to gas flow.

Civil Engineering

4063	Abrams' law	Law	Civil Engineering
------	-------------	-----	-------------------

In concrete materials, for a mixture of workable consistency the strength of concrete is determined by the ratio of water to

cement.

Control Systems

9428	photoelectric register control	Effect	Control Systems
------	--------------------------------	--------	-----------------

A register control using a light source, one or more phototubes, a suitable optical system, an amplifier, and a relay to actuate control equipment when a change occurs in the amount of light reflected from a moving surface due to

register marks, dark areas of a design, or surface defects.

## Design Engineering

7938	star drill	Effect	Design Engineering
------	------------	--------	--------------------

A tool with a star-shaped point, used for drilling in stone or masonry Stark number See Stefan number.

7910	ball race	Effect	Design Engineering
------	-----------	--------	--------------------

A track, channel, or groove in which ball bearings turn.

7957	ratchet tool	Effect	Design Engineering
------	--------------	--------	--------------------

A tool in which torque or force is applied in one direction only by means of a ratchet.

5776	shackle	Effect	Design Engineering
------	---------	--------	--------------------

An open or closed link of various shapes with extended legs; each leg has a transverse hole to accommodate a pin, bolt, or the like, which may or may not be furnished.

8637	hand drill	Effect	Design Engineering
------	------------	--------	--------------------

A small, portable drilling machine which is operated by hand.

7622	concave bit	Effect	Design Engineering
------	-------------	--------	--------------------

A type of tungsten carbide drill bit having a concave cutting edge; used for percussive boring.

10227	hinge	Effect	Design Engineering
-------	-------	--------	--------------------

A pair of metal leaves forming a jointed device on which a swinging part turns.

10175	compensated pendulum	Effect	Design Engineering
-------	----------------------	--------	--------------------

A pendulum made of two materials with different coefficients of expansion so that the distance between the point of suspension and center of oscillation remains nearly constant when the temperature changes.

7649	flat drill	Effect	Design Engineering
------	------------	--------	--------------------

A type of rotary drill constructed from a flat piece of material.

7798	funnel	Effect	Design Engineering
------	--------	--------	--------------------

A tube with one conical end that sometimes holds a filter; the function is to direct flow of a liquid or, if a filter is present, to direct a flow that was filtered.

5063	clamp	Effect	Design Engineering
------	-------	--------	--------------------

A tool for binding or pressing two or more parts together, by holding them firmly in their relative positions. See clamping circuit.

7218	cogwheel	Effect	Design Engineering
------	----------	--------	--------------------

A wheel with teeth around its edge.

765	double-cone bit	Effect	Design Engineering
-----	-----------------	--------	--------------------

A type of roller bit having only two cone-shaped cutting members. double-core barrel drill

8860	handsaw	Effect	Design Engineering
------	---------	--------	--------------------

A saw operated by hand, with a backward and forward arm movement. handset

7758	Graham's pendulum	Effect	Design Engineering
------	-------------------	--------	--------------------

A type of compensated pendulum having a hollow bob containing mercury whose thermal expansion balances the thermal expansion of the pendulum rod.

7804	pipe	Effect	Design Engineering
------	------	--------	--------------------

A tube made of metal, clay, plastic, wood, or concrete and used to conduct a fluid, gas, or finely divided solid.

12729	squeegee	Effect	Design Engineering
-------	----------	--------	--------------------

A device consisting of a handle with a blade of rubber or leather set transversely at one end and used for spreading, pushing, or wiping liquids off or across a surface.

1177	worm gear	Effect	Design Engineering
------	-----------	--------	--------------------

A gear with teeth cut on an angle to be driven by a worm; used to connect nonparallel, nonintersecting shafts.

14382	hammer	Effect	Design Engineering
-------	--------	--------	--------------------

1. A hand tool used for pounding and consisting of a solid metal head set crosswise on the end of a handle. 2. An arm with a striking head for sounding a bell or gong.

7244	deflection wedge	Effect	Design Engineering
------	------------------	--------	--------------------

A wedge-shaped tool inserted into a borehole to direct the drill bit.

13316	wheel	Prime Effect	Design Engineering
-------	-------	--------------	--------------------

A circular frame with a hub at the center for attachment to an axle, about which it may revolve and bear a load.

## Electrical

1289	electron flow	Effect	Electrical
------	---------------	--------	------------

A current produced by the movement of free electrons toward a positive terminal; the direction of electron flow is opposite to that of current.

3767      resistance material      Effect      Electrical

Material having sufficiently high resistance per unit length or volume to permit its use in the construction of resistors.

1810      film      Effect      Electrical

The layer adjacent to the valve metal in an electrochemical valve, in which is located the high voltage drop when current flows in the direction of high impedance.

14463      charge      Effect      Electrical

1. A basic property of elementary particles of matter; the charge of an object may be a positive or negative number or zero; only integral multiples of the proton charge occur, and the charge of a body is the algebraic sum of the charges of its constituents; the value of the charge may be inferred from the Coulomb force between charged objects. Also known as electric charge, quantity of electricity. 2. To convert electrical energy to chemical energy in a secondary battery. 3. To feed electrical energy to a capacitor or other device that can store it.

150      intrinsic contact potential difference      Effect      Electrical

True potential difference between two perfectly clean metals in contact.

14027      reflection loss      Effect      Electrical

1. Reciprocal of the ratio, expressed in decibels, of the scalar values of the volt-amperes delivered to the load to the voltamperes that would be delivered to a load of the same impedance as the source. 2. Apparent transmission loss of a line which results from a portion of the energy being reflected toward the source due to a discontinuity in the transmission

43      voltage drop      Effect      Electrical

The voltage developed across a component or conductor by the flow of current through the resistance or impedance of that component or conductor.

12716      resistor      Effect      Electrical

A device designed to have a definite amount of resistance; used in circuits to limit current flow or to provide a voltage drop. Also known as electrical resistor.

10229      voltage-current dual      Effect      Electrical

A pair of circuits in which the elements of one circuit are replaced by their dual elements in the other circuit according to the duality principle; for example, currents are replaced by voltages, capacitances by resistances.

4833	electron conduction	Law	Electrical
Conduction of electricity resulting from motion of electrons, rather than from ions in a gas or solution, or holes in a solid.			
2660	amperage	Law	Electrical
The amount of electric current in amperes. Abbreviated amp.			
2317	corona current	Law	Electrical
The current of electricity equivalent to the rate of charge transferred to the air from an object experiencing corona			
3132	resonant resistance	Law	Electrical
Resistance value to which a resonant circuit is equivalent.			
12268	corona discharge	Prime Effect	Electrical
A discharge of electricity appearing as a bluish-purple glow on the surface of and adjacent to a conductor when the voltage gradient exceeds a certain critical value; due to ionization of the surrounding air by the high voltage. Also known as aurora; corona; electric corona.			
13822	principle of superposition	Prime Effect	Electrical
1.The principle that the total electric field at a point due to the combined influence of a distribution of point charges is the vector sum of the electric field intensities which the individual point charges would produce at that point if each acted			

## Electronic

7862	junction transistor	Effect	Electronic
A transistor in which emitter and collector barriers are formed between semiconductor regions of opposite conductivity			
165	point-junction transistor	Effect	Electronic
Transistor having a base electrode and both point-contact and junction electrodes.			
7708	enhancement-mode junction	Effect	Electronic
A type of gallium arsenide fieldeffect transistor in which the gate consists of the junction between the n-type gallium arsenide forming the conducting channel and p-type material implanted under a metal electrode. Abbreviate E-JFET			
enqueue			
7773	varistor	Effect	Electronic
A two-electrode semiconductor device having a voltage-dependent nonlinear resistance; its resistance drops as the applied voltage is increased. Also known as voltagedependent resistor.			

7774	diode matrix	Effect	Electronic
A two-dimensional array of diodes used for a variety of purposes such as decoding and read-only memory.			
8600	electrochromic display	Effect	Electronic
A solid-state passive display that uses organic or inorganic insulating solids which change color when injected with positive or negative charges.			
798	synchronous gate	Effect	Electronic
A time gate in which the output intervals are synchronized with an incoming signal.			
15	grounded-grid-triode mixer	Effect	Electronic
Triode in which the grid forms part of a grounded electrostatic screen between the anode and cathode, and is used as a mixer for centimeter wavelengths.			
7788	very high frequency tuner	Effect	Electronic
A tuner in a television receiver for reception of stations transmitting in the very high frequency band; it generally has 12 discrete positions corresponding to channels 2-13.			
7850	Schottky transistor-transistor logic	Effect	Electronic
A transistor-transistor logic circuit in which a Schottky diode with forward diode voltage is placed across the base-collector junction of the output transistor in order to improve the speed of the circuit.			
8412	quantum wire	Effect	Electronic
A strip of conducting material about 10 nanometers or less in width and thickness that displays quantum-mechanical effects such as the Aharanov-Bohm effect and universal conductance fluctuations.			
10103	bulk photoconductor	Effect	Electronic
A photoconductor having high power-handling capability and other unique properties that depend on the semiconductor and doping materials used.			
7864	point-contact transistor	Effect	Electronic
A transistor having a base electrode and two or more point contacts located near each other on the surface of an n-type semiconductor.			
7888	symmetrical transducer	Effect	Electronic
A transducer is symmetrical with respect to a specified pair of terminations when the interchange of that pair of terminations will not affect the transmission.			

163	conductivity modulation transistor	Effect	Electronic
Transistor in which the active properties are derived from minority carrier modulation of the bulk resistivity of the semiconductor.			
8026	chip resistor	Effect	Electronic
A thick-film resistor constructed in chip form, with metallized terminations to facilitate direct bonding on hybrid integrated circuits.			
7852	unipolar transistor	Effect	Electronic
A transistor that utilizes charge carriers of only one polarity, such as a field-effect transistor.			
7855	triode transistor	Effect	Electronic
A transistor that has three terminals.			
8017	quantum well	Effect	Electronic
A thin layer of material (typically between 1 and 10 nanometers thick) within which the potential energy of an electron is less than outside the layer, so that the motion of the electron perpendicular to the layer is quantized.			
786	silicon transistor	Effect	Electronic
A transistor in which silicon is used as the semiconducting material.			
7866	grounded-emitter connection	Effect	Electronic
A transistor circuit in which the emitter electrode is common to both the input and output circuits; the emitter need not be directly connected to circuit ground. Also known as common-emitter connection.			
12534	current regulator	Effect	Electronic
A device that maintains the output current of a voltage source at a predetermined, essentially constant value despite changes in load impedance.			
11327	rate-grown transistor	Effect	Electronic
A junction transistor in which both impurities (such as gallium and antimony) are placed in the melt at the same time and the temperature is suddenly raised and lowered to produce the alternate p-type and ntype layers of rate-grown junctions. Also known as graded-junction transistor.			
11330	power transistor	Effect	Electronic
A junction transistor designed to handle high current and power; used chiefly in audio and switching circuits.			
11455	hot hole	Effect	Electronic

11509	enhancement-mode	Effect	Electronic
-------	------------------	--------	------------

1165	array	Effect	Electronic
------	-------	--------	------------

12160	rectifier stack	Effect	Electronic
-------	-----------------	--------	------------

12284	surface-barrier diode	Effect	Electronic
-------	-----------------------	--------	------------

70	diode-triode	Effect	Electronic
----	--------------	--------	------------

9640	pulse stretcher	Effect	Electronic
------	-----------------	--------	------------

12486	magnistor	Effect	Electronic
-------	-----------	--------	------------

10905	cavity magnetron	Effect	Electronic
-------	------------------	--------	------------

12610	CMOS device	Effect	Electronic
-------	-------------	--------	------------

12635	electron-beam ion trap	Effect	Electronic
-------	------------------------	--------	------------

Copyright 2005 Waldo.Hitcher@googlemail.com    [Click Here for Terms of Use](#)



electron beam's space charge. Abbreviated EBIT electron-beam lithography

12702 pulse modulator Effect Electronic

A device for carrying out the pulse modulation of a radio-frequency carrier signal.

12764 heterodyne detector Effect Electronic

A detector in which an unmodulated carrier frequency is combined with the signal of a local oscillator having a slightly different frequency, to provide an audiofrequency beat signal that can be heard with a loudspeaker or headphones; used chiefly for code reception.

12899 silicon diode Effect Electronic

A crystal diode that uses silicon as a semiconductor; used as a detector in ultra-high- and super-high-frequency circuits. Also known as silicon detector.

12900 switching diode Effect Electronic

A crystal diode that provides essentially the same function as a switch; below a specified applied voltage it has high resistance corresponding to an open switch, while above that voltage it suddenly changes to the low resistance of a closed switch.

13078 point contact Effect Electronic

A contact between a specially prepared semiconductor surface and a metal point, usually maintained by mechanical pressure but sometimes welded or bonded. point-contact diode

13174 very large scale integrated circuit Effect Electronic

A complex integrated circuit that contains between 20,000 and 1,000,000 transistors. Abbreviated VLSI circuit.

12368 solid-state device Effect Electronic

A device, other than a conductor, which uses magnetic, electric, or other properties of solid materials, as opposed to vacuum or gaseous devices.

10213 electron-beam parametric amplifier Effect Electronic

A parametric amplifier in which energy is pumped from an electrostatic field into a beam of electrons traveling down the length of the tube, and electron couplers impress the input signal at one end of the tube and translate spiraling electron motion into electric output at the other.

8742 chip capacitor Effect Electronic

A single-layer or multilayer monolithic capacitor constructed in chip form, with metallized terminations to facilitate direct bonding on hybrid integrated circuits.

8995	light valve	Effect	Electronic
1. A device whose light transmission can be made to vary in accordance with an externally applied electrical quantity, such as voltage, current, electric field, or magnetic field, or an electron beam. 2. Any directview electronic display optimized for reflecting or transmitting an image with an independent collimated light source for projection purposes.			
9079	compliant substrate	Effect	Electronic
A semiconductor substrate into which an artificially formed interface is introduced near the surface which makes the substrate more readily deformable and allows it to support a defect-free semiconductor film of essentially any lattice constant, with dislocations forming in the substrate instead of in the film. Also known as sacrificial compliant substrate.			
909	charge-coupled device	Effect	Electronic
A semiconductor device wherein minority charge is stored in a spatially defined depletion region (potential well) at the surface of a semiconductor and is moved about the surface by transferring this charge to similar adjacent wells. Abbreviated CCD.			
9094	current-controlled switch	Effect	Electronic
A semiconductor device in which the controlling bias sets the resistance at either a very high or very low value, corresponding to the "off" and "on" conditions of a switch.			
9097	varactor	Effect	Electronic
A semiconductor device characterized by a voltage-sensitive capacitance that resides in the space-charge region at the surface of a semiconductor bounded by an insulating layer. Also known as varactor diode; variable- capacitance diode; varicap; voltage-variable capacitor.			
9388	silicon resistor	Effect	Electronic
A resistor using silicon semiconductor material as a resistance element, to obtain a positive temperature coefficient of resistance that does not appreciably change with temperature; used as a temperaturesensing element.			
9856	surface barrier	Effect	Electronic
A potential barrier formed at a surface of a semiconductor by the trapping of carriers at the surface.			
11105	full subtracter	Effect	Electronic
A logic element which operates on three binary input signals representing a minuend, subtrahend, and borrow digit, producing as output a different digit and a new borrow digit. Also known as three-input subtracter.			
10165	rectifier rating	Effect	Electronic
A performance rating for a semiconductor rectifier, usually on the basis of the root-mean-square value of sinusoidal			

voltage that it can withstand in the reverse direction and the average current density that it will pass in the forward

11103      full adder      Effect      Electronic

A logic element which operates on two binary digits and a carry digit from a preceding stage, producing as output a sum digit and a new carry digit. Also known as threeinput adder.

10257      core stack      Effect      Electronic

A number of core arrays, next to one another and treated as a unit.

10299      equalizer      Effect      Electronic

A network designed to compensate for an undesired amplitude-frequency or phase-frequency response of a system or component; usually a combination of coils, capacitors, and resistors. Also known as equalizing 200 equivalent nitrogen pressure circuit.

10344      logarithmic multiplier      Effect      Electronic

A multiplier in which each variable is applied to a logarithmic function generator, and the outputs are added together and applied to an exponential function generator, to obtain an output proportional to the product of two inputs.

10453      diode mixer      Effect      Electronic

A mixer that uses a crystal or electron tube diode; it is generally small enough to fit directly into a radio-frequency transmission line.

112      stray capacitance      Effect      Electronic

Undesirable capacitance between circuit wires, between wires and the chassis, or between components and the chassis of electronic equipment.

10624      surface passivation      Effect      Electronic

A method of coating the surface of a p-type wafer for a diffused junction transistor with an oxide compound, such as silicon oxide, to prevent penetration of the impurity in undesired regions.

10810      injection efficiency      Effect      Electronic

A measure of the efficiency of a semiconductor junction when a forward bias is applied, equal to the current of injected minority carriers divided by the total current across the junction.

10817      hole mobility      Effect      Electronic

A measure of the ability of a hole to travel readily through a semiconductor, equal to the average drift velocity of holes divided by the electric field.

8689	logic card	Effect	Electronic
A small fiber chassis on which resistors, capacitors, transistors, magnetic cores, and diodes are mounted and interconnected in such a way as to perform some computer function; computers employing this type of construction may be repaired by removing 332 loop the faulty card and replacing it with a new card.			
6710	logarithmic amplifier	Effect	Electronic
An amplifier whose output signal is a logarithmic function of the input signal.			
3466	oxide passivation	Effect	Electronic
Passivation of a semiconductor surface by producing a layer of an insulating oxide on the surface.			
2959	reverse current	Effect	Electronic
Small value of direct current that flows when a semiconductor diode has reverse bias.			
3022	compensated semiconductor	Effect	Electronic
Semiconductor in which one type of impurity or imperfection (for example, donor) partially cancels the electrical effects on the other type of impurity or imperfection (for example, acceptor).			
3066	scope	Effect	Electronic
See cathode-ray oscilloscope; radarscope.			
3122	recycling	Effect	Electronic
Returning to an original condition, as to 0 or 1 in a counting circuit.			
3128	microelement	Effect	Electronic
Resistor, capacitor, transistor, diode, inductor, transformer, or other electronic element or combination of elements mounted on a ceramic wafer 0.025 centimeter thick and about 0.75 centimeter square; individual microelements are stacked, interconnected, and potted to form micromodules.			
432	diode forward voltage	Effect	Electronic
The voltage across a semiconductor diode that is carrying current in the forward direction; it is usually approximately constant over the range of currents commonly used. Also known as diode drop; diode voltage; forward voltage drop.			
3237	injection electroluminescence	Effect	Electronic
Radiation resulting from recombination of minority charge carriers injected in a pn or pin junction that is biased in the forward direction. Also known as Losseveffect; recombination electroluminescence.			
3263	electrode admittance	Effect	Electronic

Quotient of dividing the alternating component of the electrode current by the alternating component of the electrode voltage, all other electrode voltages being maintained constant.

4338      AND-OR circuit      Effect      Electronic

Gating circuit that produces a prescribed output condition when several possible combined input signals are applied; exhibits the characteristics of the AND gate and the OR gate.

3429      junction phenomena      Effect      Electronic

Phenomena which occur at the boundary between two semiconductor materials, or a semiconductor and a metal, such as the existence of an electrostatic potential in the absence of current flow, and large injection currents which may arise when external voltages are applied across the junction in one direction.

2492      quantum electronics      Effect      Electronic

The branch of electronics associated with the various energy states of matter, motions within atoms or groups of atoms, and various phenomena in crystals; examples of practical applications include the atomic hydrogen maser and the cesium atomicbeam resonator.

3495      enhancement mode      Effect      Electronic

Operation of a field-effect transistor in which no current flows when zero gate voltage is applied, and increasing the gate voltage increases the current.

3588      magnetron      Effect      Electronic

One of a family of crossed-field microwave tubes, wherein electrons, generated from a heated cathode, move under the combined force of a radial electric field and an axial magnetic field in such a way as to produce microwave radiation in the frequency range 1-40 gigahertz; a pulsed microwave radiation source for radar, and continuous source for microwave cooking.

3634      pump      Effect      Electronic

Of a parametric device, the source of alternating-current power which causes the nonlinear reactor to behave as a timevarying reactance.

3660      atmospheric noise      Effect      Electronic

Noise heard during radio reception due to atmospheric interference.

3789      vertical recording      Effect      Electronic

Magnetic recording in which bits are magnetized in directions perpendicular to the surface of the recording medium, allowing the bits to be smaller. Also known as perpendicular recording.

3813	core logic	Effect	Electronic
Logic performed in ferrite cores that serve as inputs to diode and transistor circuits.			
3885	integrated injection logic	Effect	Electronic
Integratedcircuit logic that uses a simple and compact bipolar transistor gate structure which makes possible large-scale integration on silicon for logic arrays, memories, watch circuits, and various other analog and digital applications.			
Abbreviated I <sup>2</sup> L. Also known as merged-transistor logic.			
3887	isolith	Effect	Electronic
Integrated circuit of components formed on a single silicon slice, but with the various components interconnected by beam leads and with circuit parts isolated by removal of the silicon between them.			
6832	inverting amplifier	Effect	Electronic
Amplifier whose output polarity is reversed as compared to its input; such an amplifier obtains its negative feedback by a connection from output to input, and with high gain is widely used as an operational amplifier inverting function			
329	wide band	Effect	Electronic
Property of a tuner, amplifier, or other device that can pass a broad range of frequencies.			
1527	compressor	Effect	Electronic
The part of a compandor that is used to compress the intensity range of signals at the transmitting or recording end of a circuit.			
773	maximum available gain	Effect	Electronic
The theoretical maximum power gain available in a transistor stage; it is seldom achieved in practical circuits because it can be approached only when feedback is negligible. Abbreviated MAG.			
807	microelectronics	Effect	Electronic
The technology of constructing circuits and devices in extremely small packages by various techniques. Also known as microminiaturization; microsystem electronics.			
657	electron-beam pumping	Effect	Electronic
The use of an electron beam to produce excitation for population inversion and lasing action in a semiconductor laser.			
999	intermediate-frequency amplifier	Effect	Electronic
The section of a superheterodyne receiver that amplifies signals after they have been converted to the fixed intermediate-frequency value by the frequency converter. Abbreviated i-f amplifier.			

1055	transistor input resistance	Effect	Electronic
The resistance across the input terminals of a transistor stage. Also known as input resistance.			
1063	chopping	Effect	Electronic
The removal, by electronic means, of one or both extremities of a wave at a predetermined level.			
1229	setup	Effect	Electronic
The ratio between the reference black level and the reference white level in television, both measured from the blanking level; usually expressed as a percentage.			
1283	photoemissivity	Effect	Electronic
The property of a substance that emits electrons when struck by light.			
129	hole injection	Effect	Electronic
The production of holes in an n-type semiconductor when voltage is applied to a sharp metal point in contact with the surface of the material.			
2585	anticathode	Effect	Electronic
The anode or target of an x-ray tube, on which the stream of electrons from the cathode is focused and from which x-rays are emitted.			
583	hybrid microcircuit	Effect	Electronic
Microcircuit in which thin-film, thick-film, or diffusion techniques are combined with separately attached semiconductor chips to form the circuit.			
2496	heterojunction	Effect	Electronic
The boundary between two different semiconductor materials, usually with a negligible discontinuity in the crystal			
1628	laser threshold	Effect	Electronic
The minimum pumping energy required to initiate lasing action in a laser.			
1772	base line Abbreviated BL.	Effect	Electronic
The line traced on amplitude-modulated indicators which corresponds to the power level of the weakest echo detected by the radar; it is retraced with every pulse transmitted by the radar but appears as a nearly continuous display on the			
1902	cavity impedance	Effect	Electronic
The impedance of the cavity of a microwave tube which appears across the gap between the cathode and the anode.			

1930	hot junction	Effect	Electronic
The heated junction of a thermocouple.			
1985	intermediate frequency	Effect	Electronic
The frequency produced by combining the received signal with that of the local oscillator in a superheterodyne receiver. Abbreviated i-f.			
2002	current gain	Effect	Electronic
The fraction of the current flowing into the emitter of a transistor which 139 current generator flows through the base region and out the collector.			
213	n-type conduction	Effect	Electronic
The electrical conduction associated with electrons, as opposed to holes, in a semiconductor.			
2202	collector voltage	Effect	Electronic
The direct-current voltage, obtained from a power supply, that is applied between the base and collector of a transistor. collet			
4408	vertical metal oxide semiconductor	Effect	Electronic
For semiconductor devices, a technology that involves essentially the formation of four diffused layers in silicon and etching of a V-shaped groove to a precisely controlled depth in the layers, followed by deposition of metal over silicon dioxide in the groove to form the gate electrode. Abbreviated VMOS technology.			
1308	gating	Effect	Electronic
The process of selecting those portions of a wave that exist during one or more selected time intervals or that have magnitudes between selected limits.			
6486	heater	Effect	Electronic
An electric heating element for supplying heat to an indirectly heated cathode in an electron tube. Also known as electrontube heater.			
5803	npin transistor	Effect	Electronic
An npn transistor which has a layer of high-purity germanium between the base and collector to extend the frequency			
5850	boundary	Effect	Electronic
An interface between p and n-type semiconductor materials, at which 71 boundary friction donor and acceptor concentrations are equal.			



5854	bulk resistor	Effect	Electronic
An integrated-circuit resistor in which the n-type epitaxial layer of a semiconducting substrate is used as a noncritical high-value resistor; the spacing between the attached terminals and the sheet resistivity of the material together determine the resistance value.			
5855	current-mode filter	Effect	Electronic
An integrated-circuit filter in which the signals are represented by current levels rather than voltage levels.			
5862	BiCMOS technology	Effect	Electronic
An integrated circuit technology that combines bipolar transistors and CMOS devices on the same chip.			
622	enhancement	Effect	Electronic
An increase in the density of charged carriers in a particular region of a semiconductor.			
624	electron holography	Effect	Electronic
An imaging technique using the wave nature of electrons and light, in which an interference pattern between an object wave and a reference wave is formed using a coherent field-emission electron beam from a sharp tungsten needle, and is recorded on film as a hologram, and the image of the original object is then reconstructed by illuminating a light beam equivalent to the reference wave onto the hologram.			
6270	n-type semiconductor	Effect	Electronic
An extrinsic semiconductor in which the conduction electron density exceeds the hole density.			
4276	light-sensitive	Effect	Electronic
Having photoconductive, photoemissive, or photovoltaic characteristics. Also known as photosensitive.			
6449	injector	Effect	Electronic
An electrode through which charge carriers (holes or electrons) are forced to enter the high-field region in a spacistor.			
5733	lockout circuit	Effect	Electronic
A switching circuit which responds to concurrent inputs from a number of external circuits by responding to one, and only one, of these circuits at any time. Also known as finding circuit; hunting circuit.			
6492	rectifier filter	Effect	Electronic
An electric filter used in smoothing out the voltage fluctuation of an electron tube rectifier, and generally placed between the rectifier's output and the load resistance.			
6615	programmed logic array	Effect	Electronic

An array of AND/OR logic gates that provides logic functions for a given set of inputs programmed during manufacture and serves as a read-only memory.

6697	diode gate	Effect	Electronic
------	------------	--------	------------

An AND gate that uses diodes as switching elements.

6708	silicon retina	Effect	Electronic
------	----------------	--------	------------

An analog very large scale integrated circuit chip that performs operations which resemble some of the functions performed by the retina of the human eye.

6716	summing amplifier	Effect	Electronic
------	-------------------	--------	------------

An amplifier that delivers an output voltage which is proportional to the sum of two or more input voltages or currents.

13183	antenna circuit	Effect	Electronic
-------	-----------------	--------	------------

A complete electric circuit which includes an antenna.

6958	chopper-stabilized amplifier	Effect	Electronic
------	------------------------------	--------	------------

Adirectcurrent amplifier in which a direct-coupled amplifier is in parallel with a chopper amplifier. chopper transistor

7307	diode voltage regulator	Effect	Electronic
------	-------------------------	--------	------------

A voltage regulator with a Zener diode, making use of its almost constant voltage over a range of currents.

228	degauss	Effect	Electronic
-----	---------	--------	------------

To remove, erase, or clear information from a magnetic tape, disk, drum, or core.

6427	grounded-grid amplifier	Effect	Electronic
------	-------------------------	--------	------------

An electron tube amplifier circuit in which the control grid is at ground potential at the operating frequency; the input signal is applied between cathode and ground, and the output load is connected between anode and ground.

4765	electrode current	Effect	Electronic
------	-------------------	--------	------------

Current passing to or from an electrode, through the interelectrode space within a vacuum tube.

447	bypass filter	Effect	Electronic
-----	---------------	--------	------------

Filter which provides a low-attenuation path around some other equipment, such as a carrier frequency filter used to bypass a physical telephone repeater station.

4474	magnetostrictive filter	Effect	Electronic
------	-------------------------	--------	------------

Filter network which uses the magnetostrictive phenomena to form high-pass, low-pass, band-pass, or bandelimination filters; the impedance characteristic is the inverse of that of a crystal.

4488	tristor	Effect	Electronic
Fast-switching semiconductor consisting of an alloyed junction pnp device in which the collector is capable of electron injection into the base; characteristics resemble those of a thyratron electron tube, and switching time is in the nanosecond range.			
4548	suppression	Effect	Electronic
Elimination of any component of an emission, as a particular frequency or group of frequencies in an audio-frequency of a radio-frequency signal.			
4558	photoelectromotive force	Effect	Electronic
Electromotive force caused by photovoltaic action. photoelectron			
4566	junction isolation	Effect	Electronic
Electrical isolation of a component on an integrated circuit by surrounding it with a region of a conductivity type that forms a junction, and reverse-biasing the junction so it has extremely high resistance.			
4639	diode switch	Effect	Electronic
Diode which is made to act as a switch by the successive application of positive and negative biasing voltages to the anode (relative to the cathode), thereby allowing or preventing, respectively, the passage of other applied waveforms within certain limits of voltage.			
466	pulse repeater	Effect	Electronic
Device used for receiving pulses from one circuit and transmitting corresponding pulses into another circuit; it may also change the frequencies and waveforms of the pulses and perform other functions.			
4672	pulse-width discriminator	Effect	Electronic
Device that measures the pulse length of video signals and passes only those whose time duration falls into some predetermined design tolerance. pulsometer			
5800	symmetrical O attenuator	Effect	Electronic
An O attenuator in which the impedance near the input terminals equals the corresponding impedance near the output terminals.			
4695	Gunn effect	Effect	Electronic
Development of a rapidly fluctuating current in a small block of a semiconductor (perhaps n-type gallium arsenide) when a constant voltage above a critical value is applied to contacts on opposite faces.			

579	base electrode	Effect	Electronic
An ohmic or majority carrier contact to the base region of a transistor.			
479	locking	Effect	Electronic
Controlling the frequency of an oscillator by means of an applied signal of constant frequency.			
4803	photoelectric control	Effect	Electronic
Control of a circuit or piece of equipment by changes in incident light.			
486	solid-state circuit	Effect	Electronic
Complete circuit formed from a single block of semiconductor material.			
5053	passive transducer	Effect	Electronic
A transducer containing no internal source of power.			
5082	semiconductor thermocouple	Effect	Electronic
A thermocouple made of a semiconductor, which offers the prospect of operation with high-temperature gradients, because semiconductors are good electrical conductors but poor heat conductors.			
5588	optical relay	Effect	Electronic
An optoisolator in which the output device is a light-sensitive switch that provides the same on and off operations as the contacts of a relay.			
564	switching gate	Effect	Electronic
An electronic circuit in which an output having constant amplitude is registered if a particular combination of input signals exists; examples are the OR, AND, NOT, and INHIBIT circuits. Also known as logical gate.			
5642	electron-beam tube	Effect	Electronic
An electron tube whose performance depends on the formation and control of one or more electron beams.			
192	modulate	Effect	Electronic
To vary the amplitude, frequency, or phase of a wave, or vary the velocity of the electrons in an electron beam in some characteristic manner.			
4680	compatible monolithic integrated	Effect	Electronic
Device in which passive components are deposited by thin-film techniques on top of a basic silicon-substrate circuit containing the active components and some passive parts.			
13985	subcarrier oscillator	Effect	Electronic

13919	quenching	Effect	Electronic
-------	-----------	--------	------------

13936	injection	Effect	Electronic
-------	-----------	--------	------------

13483	chopper amplifier	Effect	Electronic
-------	-------------------	--------	------------

14349	grinding	Effect	Electronic
-------	----------	--------	------------

14396	air gap	Effect	Electronic
-------	---------	--------	------------

13970	cutoff voltage	Effect	Electronic
-------	----------------	--------	------------

13748	reverse bias	Effect	Electronic
-------	--------------	--------	------------

13886	switching time	Effect	Electronic
-------	----------------	--------	------------

1. The time interval between the reference time and the last instant at which the instantaneous voltage response of a magnetic cell reaches a stated fraction of its peak value. 2. The time interval between the reference time and the first instant at which the instantaneous integrated voltage response of a magnetic cell reaches a stated fraction of its peak

13742	heterojunction bipolar transistor	Effect	Electronic
-------	-----------------------------------	--------	------------

A bipolar transistor that has two or more materials making up the emitter, base, and collector regions, giving it a much higher maximum frequency than a silicon bipolar transistor. Abbreviated HBT.

13918	transmission	Effect	Electronic
-------	--------------	--------	------------

1. The process of transferring a signal, message, picture, or other form of intelligence from one location to another location by means of wire lines, radio, light beams, infrared beams, or other communication systems.

13983	output	Effect	Electronic
-------	--------	--------	------------

1. The current, voltage, power, driving force, or information which a circuit or device delivers. 2. Terminals or other places where a circuit or device can deliver current, voltage, power, driving force, or information.

13350	NOR circuit	Effect	Electronic
-------	-------------	--------	------------

A circuit in which output voltage appears only when signal is absent from all of its input terminals.

13340	scrambler	Effect	Electronic
-------	-----------	--------	------------

A circuit that divides speech frequencies into several ranges by means of filters, then inverts and displaces the frequencies in each range so that the resulting reproduced sounds are unintelligible; the process is reversed at the receiving apparatus to restore intelligible speech. Also known as speech inverter; speech scrambler.

13243	AND NOT gate	Effect	Electronic
-------	--------------	--------	------------

A coincidence circuit that performs the logic operation AND NOT, under which a result is true only if statement A is true and statement B is not. Also known as A AND NOT B gate.

14070	threshold voltage	Effect	Electronic
-------	-------------------	--------	------------

1. In general, the voltage at which a particular characteristic of an electronic device first appears. 2. The voltage at which conduction of current begins in a pn junction. 3. The voltage at which channel formation occurs in a metal oxide semiconductor field-effect transistor. 4. The voltage at which a solid-state lamp begins to emit light.

13998	optoelectronics	Effect	Electronic
-------	-----------------	--------	------------

1. The branch of electronics that deals with solid-state and other electronic devices for generating, modulating, transmitting, and sensing electromagnetic radiation in the ultraviolet, visible-light, and infrared portions of the spectrum. 2.

13393	high Q	Effect	Electronic
-------	--------	--------	------------

13318	bistable circuit	Effect	Electronic
-------	------------------	--------	------------

13458	synchroscope	Effect	Electronic
-------	--------------	--------	------------

14157	pig	Effect	Electronic
-------	-----	--------	------------

13327	complementary symmetry	Effect	Electronic
-------	------------------------	--------	------------

14025	compression	Effect	Electronic
-------	-------------	--------	------------

1333	diode transistor logic	Effect	Electronic
------	------------------------	--------	------------

1389	screen	Effect	Electronic
------	--------	--------	------------

1374	bipolar junction transistor	Effect	Electronic
------	-----------------------------	--------	------------

1350	silicon capacitor	Effect	Electronic
------	-------------------	--------	------------

3883	conductive interference	Law	Electronic
------	-------------------------	-----	------------

71

equipment and coupled through the power supply transformer.

3168	electrode characteristic	Law	Electronic
------	--------------------------	-----	------------

Relation between the electrode voltage and the current to an electrode, all other electrode voltages being maintained constant.

3207	electrode resistance	Law	Electronic
------	----------------------	-----	------------

Reciprocal of the electrode conductance; this is the effective parallel resistance and is not the real component of the electrode impedance.

3208	electrode impedance	Law	Electronic
------	---------------------	-----	------------

Reciprocal of the electrode admittance.

3223	average noise figure	Law	Electronic
------	----------------------	-----	------------

Ratio in a transducer of total output noise power to the portion thereof attributable to thermal noise in the input termination, the total noise being summed over frequencies from zero to infinity, and the noise temperature of the input termination being standard (290 K).

326	electrode conductance	Law	Electronic
-----	-----------------------	-----	------------

Quotient of the inphase component of the electrode alternating current by the electrode alternating voltage, all other electrode voltage being maintained constant; this is a variational and not a total conductance. Also known as grid conductance.

3262	rectification factor	Law	Electronic
------	----------------------	-----	------------

Quotient of the change in average current of an electrode by the change in amplitude of the alternating sinusoidal voltage applied to the same electrode, the direct voltages of this and other electrodes being maintained constant.

24	Suhl effect	Law	Electronic
----	-------------	-----	------------

When a strong transverse magnetic field is applied to an n-type semiconducting filament, holes injected into the filament are deflected to the surface, where they may recombine rapidly with electrons or be withdrawn by a probe.

11264	Child's law	Law	Electronic
-------	-------------	-----	------------

A law stating that the current in a thermionic diode varies directly with the three-halves power of anode voltage and inversely with the square of the distance between the electrodes, provided the operating conditions are such that the current is limited only by the space charge. Also known as Child-Langmuir equation; Child-Langmuir-Schottky equation; Langmuir-Child equation.

10059	piezoelectric transducer	Prime Effect	Electronic
-------	--------------------------	--------------	------------



A piezoelectric crystal used as a transducer, either to convert mechanical or acoustical signals to electric signals, as in a microphone, or vice versa, as in ultrasonic metal inspection.

## Engineering

13620      viscometry      Effect      Engineering

A branch of rheology; the study of the behavior of fluids under conditions of internal shear; the technology of measuring viscosities of fluids.

8032      vortex thermometer      Effect      Engineering

A thermometer, used in aircraft, which automatically corrects for adiabatic and frictional temperature rises by imparting a rotary motion to the air passing the thermal sensing element.

8029      slush molding      Effect      Engineering

A thermoplastic casting in which a liquid resin is poured into a hot, hollow mold where a viscous skin forms; excess slush is drained off, the mold is cooled, and the molded product is stripped out.

6667      sterilizer      Effect      Engineering

An apparatus for sterilizing by dry heat, steam, or water.

6688      eolian anemometer      Effect      Engineering

An anemometer which works on the principle that the pitch of the eolian tones made by air moving past an obstacle is a function of the speed of the air.

632      magnetooptic recording      Effect      Engineering

An erasable data storage technology in which data are stored on a rotating disk in a thin magnetic layer that may be switched between two magnetization states by the combination of a magnetic field and a pulse of light from a diode laser.

766      normal-plate anemometer      Effect      Engineering

A type of pressure-plate anemometer in which the plate, restrained by a stiff spring, is held perpendicular to the wind; the wind-activated motion of the plate is measured electrically; the natural frequency of this system can be made high enough so that resonance magnification does not occur.

6744      vibration galvanometer      Effect      Engineering

An alternatingcurrent galvanometer in which the natural oscillation frequency of the moving element is equal to the frequency of the current being measured. vibration isolation

6658      pasteurizer      Effect      Engineering

An apparatus used for pasteurization of fluids.

6746      telescopic alidade      Effect      Engineering

An alidade used with a plane table, consisting of a telescope mounted on a straightedge ruler, fitted with a level bubble, scale, and vernier to measure angles, and calibrated to measure distances.

6803      sonobuoy      Effect      Engineering

An acoustic receiver and radio transmitter mounted in a buoy that can be dropped from an aircraft by parachute to pick up underwater sounds of a submarine and transmit them to the aircraft; to track a submarine, several buoys are dropped in a pattern that includes the known or suspected location of the submarine, with each buoy transmitting an identifiable signal; an electronic computer then determines the location of the submarine by comparison of the received signals and triangulation of the resulting time-delay data. Also known as radio sonobuoy.

8025      ultrasonic thickness gage      Effect      Engineering

A thickness gage in which the time of travel of an ultrasonic beam through a sheet of material is used as a measure of the thickness of the material.

8024      x-ray thickness gage      Effect      Engineering

A thickness gage used for measuring and indicating the thickness of moving cold-rolled sheet steel during the rolling process without making contact with the sheet; an x-ray beam directed through the sheet is absorbed in proportion to the thickness of the material and its atomic number.

8022      reed      Effect      Engineering

A thin bar of metal, wood, or cane that is clamped at one end and set into transverse elastic vibration, usually by wind pressure; used to generate sound in musical instruments, and as a frequency standard, as in a vibratingreed frequency meter.

7973      tubeless tire      Effect      Engineering

A tire that does not require an inner tube to hold air.

6733      polarized-vane ammeter      Effect      Engineering

An ammeter of only moderate accuracy in which the current to be measured passes through a small coil, distorting the field of a circular permanent magnet, and an iron vane aligns itself with the axis of the distorted field, the deflection being roughly proportional to the current.

8147      differential scatter      Effect      Engineering

A technique for the remote sensing of atmospheric particles in which the backscattering from laser beams at a number of

infrared wavelengths is measured and correlated with scattering signatures that are uniquely related to particle composition. Abbreviated DISC.

8180      electrolytic tank      Effect      Engineering

A tank in which voltages are applied to an enlarged scale model of an electron-tube system or a reduced scale model of an aerodynamic system immersed in a poorly conducting liquid, and equipotential lines between electrodes are traced; used as an aid to electron-tube design or in computing ideal fluid flow; the latter application is based on the fact that the velocity potential in ideal flow and the stream function in planar flow satisfy the same equation, Laplace's equation, as an electrostatic potential. Also known as electric tank; potential flow analyzer.

6488      induction furnace      Effect      Engineering

An electric furnace in which heat is produced in a metal charge by electromagnetic induction.

8157      laser ranging      Effect      Engineering

A technique for determining the distance to a target by precise measurement of the time required for a laser pulse to travel from a transmitter to a reflector on the target and return to a detector.

8148      nondestructive testing      Effect      Engineering

A technique for revealing flaws and defects in a material or device without damaging or destroying the test sample; includes use of x-rays, ultrasonics, radiography, and magnetic flux.

6517      diving bell      Effect      Engineering

An early diving apparatus constructed in the shape of a box or cylinder without a bottom and connected to a compressed-air hose.

8116      resistor bulb      Effect      Engineering

A temperature-measurement device inside of which is a resistance winding; changes in temperature cause corresponding changes in resistance, varying the current in the winding.

6554      post drill      Effect      Engineering

An auger or drill supported by a post.

8117      spiral thermometer      Effect      Engineering

A temperature measurement device consisting of a bimetal spiral that winds tighter or opens with changes in temperature.

6582      radio telescope      Effect      Engineering

An astronomical instrument used to measure the amount of radio energy coming from various directions in the sky, consisting of a highly directional antenna and associated electronic equipment.

8130	sorption pumping	Effect	Engineering
A technique used to reduce the pressure of gas in an atmosphere; the gas is adsorbed on a granular sorbent material such as a molecular sieve in a metal container; when this sorbent-filled container is immersed in liquid nitrogen, the gas is sorbed.			
6589	flame arrester	Effect	Engineering
An assembly of screens, perforated plates, or metal-gauze packing attached to the breather vent on a flammable product storage tank.			
6613	thermopile	Effect	Engineering
An array of thermocouples connected either in series to give higher voltage output or in parallel to give higher current output, used for measuring temperature or radiant energy or for converting radiant energy into electric power.			
6622	spray pond	Effect	Engineering
An arrangement for cooling large quantities of water in open reservoirs or ponds; nozzles spray a portion of the water into the air for the evaporative cooling effect.			
13729	rake blade	Effect	Engineering
A blade on a bulldozer in the form of spaced tines that point down.			
6539	unitized body	Effect	Engineering
An automotive body that has the body and frame in one unit; side members are designed on the principle of a bridge truss to gain stiffness, and sheet metal of the body is stressed so that it carries some of the load.			
743	pressure relief	Effect	Engineering
A valve or other mechanical device (such as a rupture disk) that eliminates system overpressure by allowing the controlled or emergency escape of liquid or gas from a pressured system.			
7035	plenum	Effect	Engineering
A condition in which air pressure within an enclosed space is greater than that in the outside atmosphere.			
7658	polarizing pyrometer	Effect	Engineering
A type of pyrometer, such as the Wanner optical pyrometer, in which monochromatic light from the source under investigation and light from a lamp with filament maintained at a constant but unknown temperature are both polarized and their intensities compared.			
7460	vacuum evaporator	Effect	Engineering

A vacuum device used to evaporate metals and spectrographic carbon to coat (replicate) a specimen for electron spectroscopic analysis or for electron microscopy.

265      spring-load      Effect      Engineering

To load or exert a force on an object by means of tension from a spring or by compression.

7166      sawhorse      Effect      Engineering

A wooden rack used to support wood that is being sawed.

792      paravane      Effect      Engineering

A torpedo-shaped device with sawlike teeth along its forward end, towed with a wire rope underwater from either side of the bow of a ship to cut the cables of anchored mines. Also known as otter.

7457      molecular drag pump      Effect      Engineering

A vacuum pump in which pumping is accomplished by imparting a high momentum to the gas molecules by impingement of a body rotating at very high speeds, as much as 16,000 revolutions per minute; such pumps achieve a vacuum as high as  $10^{-6}$  torr.

6994      Rogowski coil      Effect      Engineering

A device for measuring alternating current without making contact with the current-carrying conductor, which consists of an air-core coil placed around the conductor in a toroidal fashion so that the alternating magnetic field produced by the current induces a voltage in the coil.

7422      pressure-regulating valve      Effect      Engineering

A valve that releases or holds process-system pressure (that is, opens or closes) either by preset spring tension or by actuation by a valve controller to assume any desired position between full open and full closed.

7398      rotameter      Effect      Engineering

A variable-area, constant-head, rate-of-flow volume meter in which the fluid flows upward through a tapered tube, lifting a shaped weight to a position where upward fluid force just balances its weight.

7339      micro heat pipe      Effect      Engineering

A very small heat pipe that has a diameter between about 100 micrometers and 2 millimeters (0.004 and 0.08 inch) and a triangular cross section or other cross section with sharp corners, and that uses the sharp corner regions instead of a wick to return the working fluid from the condenser to the evaporator; it has potential applications in the electronics (cooling circuit chips), medical, space, and aircraft industries.

7323	micromechanical display	Effect	Engineering
A video display based on an array of mirrors on a silicon chip that can be deflected by electrostatic forces. Abbreviated MMD.			
13857	temper	Effect	Engineering
1. To moisten and mix clay, plaster, or mortar to the proper consistency for use. 2. See anneal.			
7243	mechanical scale	Effect	Engineering
A weighing device that incorporates a number of levers with precisely located fulcrums to permit heavy objects to be balanced with counterweights or counterpoises.			
13866	net	Effect	Engineering
1. Threads or cords tied together at regular intervals to form a mesh. 2. A series of surveying or leveling stations that have been interconnected in such a manner that closed loops or circuits have been formed, or that are arranged so as to provide a check on the consistency of the measured values. Also known as network.			
6932	suspension cable	Effect	Engineering
A freely hanging cable; may carry mainly its own weight or a uniformly distributed load.			
7239	plumb bob	Effect	Engineering
A weight suspended on a string to indicate the direction of the vertical. plumb bond			
6818	water brake	Effect	Engineering
An absorption dynamometer for measuring power output of an engine shaft; the mechanical energy is converted to heat in a centrifugal pump, with a free casing where turning moment is measured.			
6819	water-flow pyrheliometer	Effect	Engineering
An absolute pyrheliometer, in which the radiation-sensing element is a blackened, water calorimeter; it consists of a cylinder, blackened on the interior, and surrounded by a special chamber through which water flows at a constant rate; the temperatures of the incoming and outgoing water, which are monitored continuously by thermometers, are used to compute the intensity of the radiation.			
6902	mechanical hygrometer	Effect	Engineering
A hygrometer in which an organic material, most commonly a bundle of human hair, which expands and contracts with changes in the moisture in the surrounding air or gas is held under slight tension 348 mechanical units by a spring, and a mechanical linkage actuates a pointer.			
13773	normal barometer	Effect	Engineering

A barometer of such accuracy that it can be used for the determination of pressure standards; an instrument such as a large-bore mercury barometer is usually used.

13788      radiosonde      Effect      Engineering

A balloon-borne instrument for the simultaneous measurement and transmission of meteorological data; the instrument consists of transducers for the measurement of pressure, temperature, and humidity, a modulator for the conversion of the output of the transducers to a quantity which controls a property of the radio-frequency signal, a selector switch which determines the sequence in which the parameters are to be transmitted, and a transmitter which generates the radio-frequency carrier.

8246      piping      Effect      Engineering

A system of pipes provided to carry a fluid. Also known as pipework. piston (ENG

7684      Ledoux bell meter      Effect      Engineering

A type of manometer used to measure the difference in pressure between two points generated by any one of several types of flow measurement devices such as a pitot tube; it is equipped with a shaped plug which makes the reading of the meter directly proportional to the flow rate.

6996      respirator      Effect      Engineering

A device for maintaining artificial respiration to protect the respiratory tract against irritating and poisonous gases, fumes, smoke, and dusts, with or without equipment supplying oxygen or air; some types have a fitting which covers the nose and mouth.

7668      Wanner optical pyrometer      Effect      Engineering

A type of polarizing pyrometer in which beams from the source under investigation and a comparison lamp are polarized at right angles and then passed through a Nicol prism and a red filter; the source temperature is determined from the angle through which the Nicol prism must be rotated in order to equalize the intensities of the resulting patches of light.

6943      vortex amplifier      Effect      Engineering

A fluidic device in which the supply flow is introduced at the circumference of a shallow cylindrical chamber; the vortex field developed can substantially reduce or throttle flow; used in fluidic diodes, throttles, pressure amplifiers, and a rate

278      sharpen      Effect      Engineering

To give a thin keen edge or a sharp acute point to.

7663      liquid-sealed meter      Effect      Engineering

A type of positive displacement meter for gas flows consisting of a cylindrical chamber that is more than half filled with

water and divided into four rotating compartments formed by trailing vanes; gas entering through the center shaft into one compartment after another forces rotation that allows the gas then to exhaust out the top as it is displaced by the water.  
Also known as drum meter.

6985 thermoacoustic-Stirling engine Effect Engineering

A device in which the thermodynamic cycle of a Stirling engine is accomplished in a traveling-wave acoustic network, and acoustic power is produced from heat.

7913 cooling tower Effect Engineering

A towerlike device in which atmospheric air circulates and cools warm water, generally by direct contact (evaporation).  
coolometer

7687 Lenard spiral Effect Engineering

A type of magnetometer consisting of a spiral of bismuth wire and a Wheatstone bridge to measure changes in the resistance of the wire produced by magnetic fields and as a result of the transverse magnetoresistance of bismuth.

9969 reaction injection molding Effect Engineering

A plastics fabrication process in which two streams of highly reactive, low-molecular-weight, low-viscosity resin systems are combined to form a solid material.

9779 stroboscopic disk Effect Engineering

A printed disk having a number of concentric rings each containing a different number of dark and light segments; when the disk is placed on a phonograph turntable or rotating shaft and illuminated at a known frequency by a flashing discharge tube, speed can be determined by noting which pattern appears to stand still or to rotate slowly.

10303 purse seine Effect Engineering

A net that can be dropped by two boats to encircle a school of fish, then pulled together at the bottom and raised, thereby catching the fish.

10302 gill net Effect Engineering

A net that entangles the gill covers of fish.

1030 seine net Effect Engineering

A net used to catch fish by encirclement, usually by closure of the two ends and the bottom.

1028 ultrasonic testing Effect Engineering

A nondestructive test method that employs high-frequency mechanical vibration energy to detect and locate structural discontinuities or differences and to measure thickness of a variety of materials.



10233	gasket	Effect	Engineering
A packing made of deformable material, usually in the form of a sheet or ring, used to make a pressure-tight joint between stationary parts. Also known as static seal. gas law			
10084	bistable unit	Effect	Engineering
A physical element that can be made to assume either of two stable states; a binary cell is an example.			
10006	sump	Effect	Engineering
A pit or tank which receives and temporarily stores drainage at the lowest point of a circulating or drainage system. Also known as sump pit.			
10418	deep-draw mold	Effect	Engineering
A mold for plastic material that is long in relation to the thickness of the mold wall.			
9972	pinch-tube process	Effect	Engineering
A plastics blowmolding process in which the extruder drops a tube between mold halves, and the tube is pinched off when the mold closes.			
10447	flash steam	Effect	Engineering
A mixture of steam and water that occurs when hot water under pressure moves to a region of lower pressure, such as in a flash boiler.			
9963	sprayed metal mold	Effect	Engineering
A plastics mold made by spraying molten metal onto a master spring gravimeter form until a shell of predetermined thickness is achieved; the shell is then removed and backed up with plaster, cement, or casting resin; used primarily in plastic sheet forming.			
9962	semipositive mold	Effect	Engineering
A plastics mold that allows a small amount of excess material to escape when it is closed.			
996	loose-detail mold	Effect	Engineering
A plastics mold with parts that come out with the molded piece. loose fit			
9960	air-assist forming	Effect	Engineering
A plastics thermoforming method in which air pressure is used to partially preform a sheet before it enters the mold.			
9959	pressure forming	Effect	Engineering
A plastics thermoforming process using pressure to push the plastic sheet to be formed against the mold surface, as			

opposed to using vacuum to suck the sheet flat against the mold.

9958      slip forming      Effect      Engineering

A plastics-sheet forming technique in which some of the sheet is allowed to slip through the mechanically operated clamping rings during stretch-forming operations.

9852      kick wheel      Effect      Engineering

A potter's wheel worked by a foot pedal.

13476      water jacket      Effect      Engineering

A casing for circulation of cooling water.

9973      screw plasticating injection molding      Effect      Engineering

A plastic-molding technique in which plastic is converted from pellets to a viscous (plasticated) melt by an extruder screw that is an integral part of the molding machine.

10568      slot dozing      Effect      Engineering

A method of moving large quantities of material with a bulldozer using the same path for each trip so that the spillage from the sides of the blade builds up along each side; afterward all material pushed into the slot is retained in front of the

10593      drape forming      Effect      Engineering

A method of forming thermoplastic sheet in which the sheet is clamped into a movable frame, heated, and draped over high points of a male mold; vacuum is then applied to complete the forming operation.

10586      plasma-source ion implantation      Effect      Engineering

A method of ion implantation in which the workpiece is placed in a plasma containing the appropriate ion species and is repetitively pulse-biased to a high negative potential so that positive plasma ions are accelerated to the surface and implant in the bulk material. Abbreviated PSII.

10584      stitch bonding      Effect      Engineering

A method of making wire connections between two or more points on an integrated circuit by using impulse welding or heat and pressure while feeding the connecting wire through a hole in the center of the welding electrode.

10582      magnetic source imaging      Effect      Engineering

A method of mapping electric currents within an object, particularly currents associated with biological activity, by using an array of SQUID magnetometers to detect the resulting magnetic fields surrounding the object. Abbreviated MSI.

10579      magnetovision      Effect      Engineering

10577	thermography	Effect	Engineering
-------	--------------	--------	-------------

10576	contact thermography	Effect	Engineering
-------	----------------------	--------	-------------

10575	infrared thermography	Effect	Engineering
-------	-----------------------	--------	-------------

10307	photonephelometer	Effect	Engineering
-------	-------------------	--------	-------------

10570	bag molding	Effect	Engineering
-------	-------------	--------	-------------

9768	Zyglo method	Effect	Engineering
------	--------------	--------	-------------

10567	pulsed video thermography	Effect	Engineering
-------	---------------------------	--------	-------------

10565	intrusion grouting	Effect	Engineering
-------	--------------------	--------	-------------

10553	stuffing	Effect	Engineering
-------	----------	--------	-------------

83

10548	two-step grooving system	Effect	Engineering
A method of spooling a drum in which the wire rope, controlled by grooves, moves parallel to the drum flanges for one-half the circumference and then crosses over to start the next wrap. Also known as counterbalance system.			
10547	hot-air sterilization	Effect	Engineering
A method of sterilization using dry heat for glassware and other heatresistant materials which need to be dry after treatment; temperatures of 160-165 °C are generated for at least 2 hours.			
1053	electromagnetic logging	Effect	Engineering
A method of well logging in which a transmitting coil sets up an alternating electromagnetic field, and a receiver coil, placed in the drill hole above the transmitter coil, measures the secondary electromagnetic field induced by the resulting eddy currents within the formation. Also known as electromagnetic well logging.			
10528	rope boring	Effect	Engineering
A method similar to rod drilling except that rigid rods are replaced by a steel rope to which the boring tools are attached and allowed to fall by their own weight.			
10520	Rossman drive	Effect	Engineering
A method used to provide speed control of alternating-current motors; an induction motor stator is mounted on trunnion bearings and driven with an auxiliary motor, to provide the desired change in slip between the stator and rotor.			
124	frequency-modulation Doppler	Effect	Engineering
Type of radar involving frequency modulation of both carrier and modulation on radial sweep.			
144	Smithell's burner	Effect	Engineering
Two concentric tubes that can be added to a bunsen burner to separate the inner and outer flame cones.			
9795	Dines anemometer	Effect	Engineering
A pressure-tube anemometer in which the pressure head on a weather vane is kept facing into the wind, and the suction head, near the bearing which supports the vane, develops a suction independent of wind direction; the pressure difference between the heads is proportional to the square of the wind speed and is measured by a float manometer with a linear wind scale.			
9374	potter's wheel	Effect	Engineering
A revolving horizontal disk that turns when a treadle is operated; used to shape clay by hand.			
9366	spreader beam	Effect	Engineering

A rigid beam hanging from a crane hook and fitted with a number of ropes at different points along its length; employed for such purposes as lifting reinforced concrete piles or large sheets of glass.

9142      demister blanket      Effect      Engineering

A section of knitted wire mesh that is placed below the vapor outlet of a vaporizer or an evaporator to separate entrained liquid droplets from the stream of vapor.

9135      Van Dorn sampler      Effect      Engineering

A sediment sampler that consists of a Plexiglas cylinder closed at both ends by rubber force cups; in the armed position the cups are pulled outside the cylinder and restrained by a releasing mechanism, and after the sample is taken, a length of surgical rubber tubing connecting the cups is sufficiently prestressed to permit the force cups to retain the sample in the cylinder.

9133      Schweydar mechanical detector      Effect      Engineering

A seismic detector that senses and records refracted waves; a lead sphere is suspended by a flat spring, the sphere's motion is magnified by an aluminum cone that moves a bow around a spindle carrying a mirror, and this motion is then photographically recorded.

9125      universal chuck      Effect      Engineering

A self-centering chuck whose jaws move in unison when a scroll plate is rotated.

9123      aqualung      Effect      Engineering

A self-contained underwater breathing apparatus (scuba) of the demand or open-circuit type developed by J.Y.

9423      prepreg      Effect      Engineering

A reinforced-plastics term for the reinforcing material that contains or is combined with the full complement of resin before the molding operation.

9066      torsion-string galvanometer      Effect      Engineering

A sensitive galvanometer in which the moving system is suspended by two parallel fibers that tend to twist around each other.

9508      vectopluiometer      Effect      Engineering

A rain gage or array of rain gages designed to measure the inclination and direction of falling rain; vectopluiometers may be constructed in the fashion of a wind vane so that the receiver always faces the wind, or they may consist of four or more receivers arranged to point in cardinal directions.

6172	microtome	Effect	Engineering
An instrument for cutting thin sections of tissues or other materials for microscopical examination.			
9028	surface micromachining	Effect	Engineering
A set of processes based upon deposition, patterning, and selective etching of thin films to form a freestanding microsensor on the surface of a silicon wafer.			
6487	resistance furnace	Effect	Engineering
An electric furnace in which the heat is developed by the passage of current through a suitable internal resistance that may be the charge itself, a resistor embedded in the charge, or a resistor surrounding the charge. Also known as electric resistance furnace.			
8887	slip casting	Effect	Engineering
A process in the manufacture of shaped refractories, cermets, and other materials in which the slip is poured into porous plaster molds.			
8799	vernier	Effect	Engineering
A short, auxiliary scale which slides along the main instrument scale to permit accurate fractional reading of the least main division of the main scale.			
870	specific-gravity bottle	Effect	Engineering
A small bottle or flask used to measure the specific gravities of liquids; the bottle is weighed when it is filled with the liquid whose specific gravity is to be determined, when filled with a reference liquid, and when empty. Also known as density bottle; relative-density bottle.			
8642	wheelbarrow	Effect	Engineering
A small, hand-pushed vehicle with a single wheel and axle between the front ends of two shafts that support a boxlike body and serve as handles at the rear. Also known as barrow.			
13527	supercalendering	Effect	Engineering
A calendering process that uses both steam and high pressure to give calendered material, for example, paper, a highdensity finish.			
9122	recirculator	Effect	Engineering
A self-contained underwater breathing apparatus that recirculates an oxygen supply (mix-gas or pure) to the diver until the oxygen is depleted.			
9625	conduction pump	Effect	Engineering

A pump in which liquid metal or some other conductive liquid is moved through a pipe by sending a current across the liquid and applying a magnetic field at right angles to current flow.

9749      dielectric curing      Effect      Engineering

A process for curing a thermosetting resin by subjecting it to a highfrequency electric charge.

9747      Fourcault process      Effect      Engineering

A process for forming sheet glass in which the molten glass is drawn vertically upward.

9740      ion-beam mixing      Effect      Engineering

A process in which bombardment of a solid with a beam of energetic ions causes the intermixing of atoms of two separate phases originally present in the near-surface region.

9726      ion implantation      Effect      Engineering

A process of introducing impurities into the near-surface regions of solids by directing a beam of ions at the solid.

9725      extrusion coating      Effect      Engineering

A process of placing resin on a substrate by extruding a thin film of molten resin and pressing it onto or into the substrates, or both, without the use of adhesives. exudation See sweating.

9724      full-cell process      Effect      Engineering

A process of preservative treatment of wood that uses a pressure vessel and first draws a vacuum on the charge of wood and then introduces the preservative without breaking the vacuum. Also known as Bethell process.

971      solvent molding      Effect      Engineering

A process to form thermoplastic articles by dipping a mold into a solution or dispersion of the resin and drawing off (evaporating) the solvent to leave a plastic film adhering to the mold.

9707      flotation      Effect      Engineering

A process used to separate particulate solids by causing one group of particles to float; utilizes differences in surface chemical properties of the particles, some of which are entirely wetted by water, others are not; the process is primarily applied to treatment of minerals but can be applied to chemical and biological materials; in mining engineering it is referred to as froth flotation.

9400      stockpile      Effect      Engineering

A reserve stock of material, equipment, raw material, or other supplies.

9675      deep underwater muon and neutrino      Effect      Engineering

A proposed device for detecting and determining the direction of extraterrestrial neutrinos passing through a volume of approximately 1 cubic kilometer of ocean water, using an array of several thousand Cerenkov counters suspended in the water to sense the showers of charged particles generated by neutrinos. Abbreviated DUMAND.

8414      bimetallic strip      Effect      Engineering

A strip formed of two dissimilar metals welded together; different temperature coefficients of expansion of the metals cause the strip to bend or curl when the temperature changes.

9599      Michaelson actinograph      Effect      Engineering

A pyrhelimeter of the bimetallic type used to measure the intensity of direct solar radiation; the radiation is measured in terms of the angular deflection of a blackened bimetallic strip which is exposed to the direct solar beams.

9598      narrow-band pyrometer      Effect      Engineering

A pyrometer in which light from a source passes through a color filter, which passes only a limited band of wavelengths, before falling on a photoelectric detector.

9583      raft      Effect      Engineering

A quantity of timber or lumber secured together by means of ropes, chains, or rods and used for transportation by

9564      ionosonde      Effect      Engineering

A radar system for determining the vertical height at which the ionosphere reflects signals back to earth at various frequencies; a pulsed vertical beam is swept periodically through a frequency range from 0.5 to 20 megahertz, and the variation of echo return time with frequency is photographically recorded.

9560      radar triangulation      Effect      Engineering

A radar system of locating targets, usually aircraft, in which two or more separate radars are employed to measure range only; the target is located by automatic trigonometric solution of the triangle composed of a pair of radars and the target in which all three sides are known.

9557      Doppler radar      Effect      Engineering

A radar that makes use of the Doppler shift of an echo due to relative motion of target and radar to differentiate between fixed and moving targets and measure target velocities.

9552      chromoradiometer      Effect      Engineering

A radiation meter that uses a substance whose color changes with x-ray dosage.

9546      Golay cell      Effect      Engineering

A radiometer in which radiation absorbed in a gas chamber heats the gas, causing it to expand and deflect a diaphragm in



accordance with the amount of radiation.

9678      dry permeability      Effect      Engineering

A property of dried bonded sand to permit passage of gases while molten material is poured into a mold.

3253      monopulse radar      Effect      Engineering

Radar in which directional information is obtained with high precision by using a receiving antenna system having two or more partially overlapping lobes in the radiation patterns.

3363      cryopreservation      Effect      Engineering

Preservation of food, biologicals, and other materials at extremely low temperatures.

3362      Cartesian diver manostat      Effect      Engineering

Preset, on-off control manometer arrangement by which a specified low pressure (high vacuum) is maintained via the rise or submergence of a marginally buoyant float within a liquid mercury reservoir.

3356      diaphragm gage      Effect      Engineering

Pressure- or vacuum-sensing instrument in which pressures act against opposite sides of an enclosed diaphragm that consequently moves in relation to the difference between the two pressures, actuating a mechanical indicator or electric-electronic signal.

335      kiss-roll coating      Effect      Engineering

Procedure for coating a substrate web in which the coating roll carries a metered film of coating material; part of the film transfers to the web, part remains on the roll.

3314      capillary drying      Effect      Engineering

Progressive removal of moisture from a porous solid mass by surface evaporation followed by capillary movement of more moisture to the drying surface from the moist inner region, until the surface and core stabilize at the same moisture concentration.

3313      stitching      Effect      Engineering

Progressive welding of thermoplastic materials (resins) by successive applications of two small, mechanically operated, radiofrequency- heated electrodes; the mechanism is similar to that of a normal sewing machine.

14204      blowpipe      Effect      Engineering

1. Along, straight tube, used in glass blowing, on which molten glass is gathered and worked. 2. A small, tapered, and frequently curved tube that leads a jet, usually of air, into a flame to concentrate and direct it; used in flame tests in analytical chemistry and in brazing and soldering of fine work. 3. See blowtorch.

2935	Doppler sonar	Effect	Engineering
Sonar based on Doppler shift measurement technique. Abbreviated DS. Doppler tracking			
327	inert-gas blanketing	Effect	Engineering
Purging the air from a unit of a heat exchanger by using an inert gas as the unit is being shut down.			
3408	quench-tank extrusion	Effect	Engineering
Plastic-film or metal extrusion that is cooled in a quenching medium.			
3190	damping	Effect	Engineering
Reducing or eliminating reverberation in a room by placing sound-absorbing materials on the walls and ceiling. Also known as soundproofing.			
3188	pulping	Effect	Engineering
Reducing wood to pulp. pulp molding			
312	pitometer	Effect	Engineering
Reversed pitot-tube-type flowmeasurement device with one pressure opening facing upstream and the other facing downstream.			
3083	radiogoniometry	Effect	Engineering
Science of locating a radio transmitter by means of taking bearings on the radio waves emitted by such a transmitter.			
14232	sonar	Effect	Engineering
1. A system that uses underwater sound, at sonic or ultrasonic frequencies, to detect and locate objects in the sea, or for communication; the commonest type is echo-ranging sonar; other versions are passive sonar, scanning sonar, and searchlight sonar. Derived from sound navigation and ranging. 2. See sonar set.			
14253	peg	Effect	Engineering
1. A small pointed or tapered piece, often cylindrical, used to pin down or fasten parts. 2. A projection used to hang or support objects.			
3005	gravity separation	Effect	Engineering
Separation of immiscible phases (gas-solid, liquid-solid, liquid-liquid, solid-solid) by allowing the denser phase to settle out under the influence of gravity; used in ore dressing and various industrial chemical processes.			
6183	vibrometer	Effect	Engineering
An instrument designed to measure the amplitude of a vibration. Also known as vibration meter.			

3289	jet propulsion	Effect	Engineering
Propulsion by means of a jet of fluid.			
3498	electrohydraulic	Effect	Engineering
Operated or effected by a combination of electric and hydraulic mechanisms.			
3692	injection molding	Effect	Engineering
Molding metal, plastic, or nonplastic ceramic shapes by injecting a measured quantity of the molten material into dies.			
369	jet molding	Effect	Engineering
Molding method in which most of the heat is applied to the material to be molded as it passes through a nozzle or jet, rather than in a conventional heating cylinder.			
3650	airtight	Effect	Engineering
Not permitting the passage of air. Also known as airproof.			
3643	diamond coring	Effect	Engineering
Obtaining core samples of rock by using a diamond drill.			
3637	gimbal freedom	Effect	Engineering
Of a gyro, the maximum angular displacement about the output axis of a gimbal.			
3596	force compensation	Effect	Engineering
On an analytical balance, the weight force of a load that is held in equilibrium by a force of equal size which acts in the opposite direction.			
14177	micrometer	Effect	Engineering
1. An instrument attached to a telescope or microscope for measuring small distances or angles. 2. A caliper for making precise measurements; a spindle is moved by a screw thread so that it touches the object to be measured; the dimension can then be read on a scale. Also known as micrometer caliper.			
3554	die chaser	Effect	Engineering
One of the cutting parts of a composite die or a die used to cut threads.			
3405	injection blow molding	Effect	Engineering
Plastics molding process in which a hollow-plastic tube is formed by injection molding.			
3499	hydropneumatic	Effect	Engineering
Operated by both water and air power.			

3406	continuous tube process	Effect	Engineering
Plastics blowmolding process that uses a continuous extrusion of plastic tubing as feed to a series of blow molds as they clamp in sequence.			
3475	ramming	Effect	Engineering
Packing a powder metal or sand into a compact mass.			
14197	spark arrester	Effect	Engineering
1. An apparatus that prevents sparks from escaping from a chimney.			
3465	radiopasteurization	Effect	Engineering
Pasteurization by surface treatment with low-energy irradiation. radio position finding			
3460	screen pipe	Effect	Engineering
Perforated pipe with a straining device in the form of closely wound wire coils wrapped around it to admit well fluids while excluding sand.			
3427	macroscopic anisotropy	Effect	Engineering
Phenomenon in electrical downhole logging wherein electric current flows more easily along sedimentary strata beds than perpendicular to them.			
3422	cooling process	Effect	Engineering
Physical operation in which heat is removed from process fluids or solids; may be by evaporation of liquids, expansion of gases, radiation or heat exchange to a cooler fluid stream, and so on.			
342	scouring	Effect	Engineering
Physical or chemical attack on process equipment surfaces, as in a furnace or fluid catalytic cracker.			
2900	reference tone	Effect	Engineering
Stable tone of known frequency continuously recorded on one track of multitrack signal recordings and intermittently recorded on signal track recordings by the collection equipment operators for subsequent use by the data analysts as a frequency reference.			
3513	ropeway	Effect	Engineering
One or a pair of steel cables between several supporting towers which serve as tracks for transporting materials in mountainous areas or at sea.			
14434	lockset	Effect	Engineering

1. A complete lock including the lock mechanism, keys, plates, and other parts.

1470      acoustic hologram      Effect      Engineering

The phase interference pattern, formed by acoustic beams, that is used in acoustical holography; when light is made to interact with this pattern, it forms an image of an object placed in one of the beams.

14412      gland      Effect      Engineering

1. A device for preventing leakage at a machine joint, as where a shaft emerges from a vessel containing a pressurized fluid. 2. A movable part used in a stuffing box to compress the packing.

14417      magnetic balance      Effect      Engineering

1. A device for determining the repulsion or attraction between magnetic poles, in which one magnet is suspended and the forces needed to cancel the effects of bringing a pole of another magnet close to one end are measured. 2. Any device for measuring the small forces involved in determining paramagnetic or diamagnetic susceptibility.

14419      skid      Effect      Engineering

1. A device attached to a chain and placed under a wheel to prevent its turning when descending a steep hill. 2. A timber, bar, rail, or log placed under a heavy object when it is being moved over bare ground. 3. A wood or metal platform support on wheels, legs, or runners used for handling and moving material.

14426      bucket      Effect      Engineering

1. A cup on the rim of a Pelton wheel against which water impinges. 2. A reversed curve at the toe of a spillway to deflect the water horizontally and reduce erosiveness.

619      thermoelectric cooling      Effect      Engineering

Cooling of a chamber based on the Peltier effect; an electric current is sent through a thermocouple whose cold junction is thermally coupled to the cooled chamber, while the hot junction dissipates heat to the surroundings. Also known as thermoelectric refrigeration.

108      abrasive jet cleaning      Effect      Engineering

The removal of dirt from a solid by a gas or liquid jet carrying abrasives to ablate the surface.

14254      pen      Effect      Engineering

1. A small place for confinement, storage, or protection. 2. A device for writing with ink.

14433      lifting dog      Effect      Engineering

1. A component part of the overshot assembly that grasps and lifts the inner tube or a wire-line core barrel. 2. A clawlike

hook for grasping cylindrical objects, such as drill rods or casing, while raising and lowering them.

14409    go-devil    Effect    Engineering

1. A device inserted in a pipe or hole for purposes such as cleaning or for detonating an explosive. 2. A sled for moving logs or cultivating. 3. A large rake for gathering hay.

994    virtual leak    Effect    Engineering

The semblance of the vacuum system leak caused by a gradual desorptive release of gas at a rate which cannot be accurately predicted.

988    vacuum filtration    Effect    Engineering

The separation of solids from liquids by passing the mixture through a vacuum filter.

14435    grizzly    Effect    Engineering

1. A coarse screen used for rough sizing and separation of ore, gravel, or soil. 2. A grating to protect chutes, manways, and winzes, in mines, or to prevent debris from entering a water inlet.

874    bionics    Effect    Engineering

The study of systems, particularly electronic systems, which function after the manner of living systems.

14446    air lock    Effect    Engineering

1. A chamber capable of being hermetically sealed that provides for passage between two places of different pressure, such as between an altitude chamber and the outside 15 air-lock strip atmosphere, or between the outside atmosphere and the work area in a tunnel or shaft being excavated through soil subjected to water pressure higher than atmospheric. Also known as lock. 2. An air bubble in a pipeline which impedes liquid flow. 3. A depression on the surface of a molded plastic part that results from air trapped between the surface of the mold and the plastic.

658    friction force microscopy    Effect    Engineering

The use of an atomic force microscope to measure the frictional forces on a surface.

659    electrostatic force microscopy    Effect    Engineering

The use of an atomic force microscope to measure electrostatic forces from electric charges on a surface.

14467    drawbar    Effect    Engineering

1. A bar used to connect a tender to a steam locomotive. 2. A beam across the rear of a tractor for coupling machines or other loads. 3. A clay block submerged in a glass-making furnace to define the point at which sheet glass is drawn.

14430    bullet    Effect    Engineering

1. A conical-nosed cylindrical weight, attached to a wire rope or line, either notched or seated to engage and attach itself to the upper end of a wire line core barrel or other retrievable or retractable device that has been placed in a borehole. Also known as bug; godevil; overshot. 2. A scraper with self-adjusting spring blades, inserted in a pipeline and carried forward by the fluid pressure, clearing away accumulations or debris from the walls of a pipe.

14340      flame spraying      Effect      Engineering

1. A method of applying a plastic coating onto a surface in which finely powdered fragments of the plastic, together with suitable fluxes, are projected through a cone of flame. 2. Deposition of a conductor on a board in molten form, generally through a metal mask or stencil, by means of a spray gun that feeds wire into a gas flame and drives the molten particles against the work.

2848      sandblasting      Effect      Engineering

Surface treatment in which steel grit, sand, or other abrasive material is blown against an object to produce a roughened surface or to remove dirt, rust, and scale.

2818      gravity segregation      Effect      Engineering

Tendency of immiscible liquids or multicomponent granular mixtures to separate into distinct layers in accordance with their respective densities.

2705      shot boring      Effect      Engineering

The act or process of producing a borehole with a shot drill.

14255      vent      Effect      Engineering

1. A small passage made with a needle through stemming, for admitting a squib to enable the charge to be lighted. 2. A hole, extending up through the bearing at the top of the core-barrel inner tube, which allows the water and air in the upper part of the inner tube to escape into the borehole. 3. A small hole in the upper end of a core-barrel inner tube that allows water and air in the inner tube to escape into the annular space between the inner and outer barrels. 4. An opening provided for the discharge of pressure or the release of pressure from tanks, vessels, reactors, processing equipment, and so on. 5. A pipe for providing airflow to or from a drainage system or for circulating air within the system to protect trap seals from siphonage and back pressure.

2566      bioengineering      Effect      Engineering

The application of engineering knowledge to the fields of medicine and biology.

2562      neurotechnology      Effect      Engineering

The application of microfabricated devices to achieve direct contact with the electrically active cells of the nervous system (neurons).

14307	preform	Effect	Engineering
1. A preshaped fibrous reinforcement. 2. A compact mass of premixed plastic material that has been prepared for convenient handling and control of uniformity during the mold loading process.			
2489	micromechatronics	Effect	Engineering
The branch of engineering concerned with micro-electro-mechanical systems.			
1441	tumbler	Effect	Engineering
1. A device in a lock cylinder that must be moved to a particular position, as by a key, before the bolt can be thrown. 2. A device or mechanism in which objects are tumbled.			
2206	electrothermal energy conversion	Effect	Engineering
The direct conversion of electric energy into heat energy, as in an electric heater.			
563	pneumatic	Effect	Engineering
Pertaining to or operated by air or other gas.			
2163	slant drilling	Effect	Engineering
The drilling of a borehole or well at an angle to the vertical.			
2063	spinning	Effect	Engineering
The extrusion of a spinning solution (such as molten plastic) through a spinneret.			
14347	bellows	Effect	Engineering
1. A mechanism that expands and contracts, or has a rising and falling top, to suck in air through a valve and blow it out through a tube. 2. Any of several types of enclosures which have accordionlike walls, allowing one to vary the volume. 3. See aneroid capsule.			
1999	fly rock	Effect	Engineering
The fragments of rock thrown and scattered during quarry or tunnel blasting. flywheel			
14374	bell	Effect	Engineering
1. A hollow metallic cylinder closed at one end and flared at the other; it is used as a fixed-pitch musical instrument or signaling device and is set vibrating by a clapper or tongue which strikes the lip. 2. See bell tap.			
1882	surface ignition	Effect	Engineering
The initiation of a flame in the combustion chamber of an automobile engine by any hot surface other than the spark discharge.			



14408	vapor-recovery unit	Effect	Engineering
1. A device or system to catch vaporized materials (usually fuels or solvents) as they are vented. 2. In petroleum refining, a process unit to which gases and vaporized gasoline from various processing operations are charged, separated, and recovered for further use.			
3713	sandwich heating	Effect	Engineering
Method for heating both sides of a thermoplastic sheet simultaneously prior to forming or shaping.			
2270	precoating	Effect	Engineering
The depositing of an inert material, such as filter aid, onto the filter medium prior to the filtration of suspended solids from a solid-liquid slurry.			
6005	normal-incidence pyrheliometer	Effect	Engineering
An instrument that measures the energy in the solar beam; it usually measures the radiation that strikes a target at the end of a tube equipped 373 normal inspection with a shutter and baffles to collimate the beam.			
6142	convectron	Effect	Engineering
An instrument for indicating deviation from the vertical which is based on the principle that the convection from a heated wire depends strongly on its inclination; it consists of a Y-shaped tube, each of whose arms contains a wire forming part of a bridge circuit.			
6136	inkometer	Effect	Engineering
An instrument for measuring adhesion of liquids by rotating drums in contact with the liquid.			
6125	nutating-disk meter	Effect	Engineering
An instrument for measuring flow of a liquid in which liquid passing through a chamber causes a disk to nutate, or roll back and forth, and the total number of rolls is mechanically counted.			
6123	vortex precession flowmeter	Effect	Engineering
An instrument for measuring gas flows from the rate of precession of vortices generated by a fixed set of radial vanes placed in the flow. Also known as swirl flowmeter.			
6122	free-piston gage	Effect	Engineering
An instrument for measuring high fluid pressures in which the pressure is applied to the face of a small piston that can move in a cylinder and the force needed to keep the piston stationary is determined. Also known as piston gage.			
6112	acoustic radiometer	Effect	Engineering

An instrument for measuring sound intensity by determining the unidirectional steady-state pressure caused by the reflection or absorption of a sound wave at a boundary.

6108      water meter      Effect      Engineering

An instrument for measuring the amount of water passing a specified point in a piping system.

3694      thread plug      Effect      Engineering

Mold part which shapes an internal thread onto a molded article; must be unscrewed from the finished piece.

6013      vibrating-reed magnetometer      Effect      Engineering

An instrument that measures magnetic fields by noting their effect on the vibration of reeds excited by an alternating magnetic field.

6146      hygrometer      Effect      Engineering

An instrument for giving a direct indication of the amount of moisture in the air or other gas, the indication usually being in terms of relative humidity as a percentage which the moisture present bears to the maximum amount of moisture that could be present at the location temperature without condensation taking place.

5998      mass flowmeter      Effect      Engineering

An instrument that measures the mass of fluid that flows through a pipe, duct, or open channel in a unit time.

5993      pitot tube      Effect      Engineering

An instrument that measures the stagnation pressure of a flowing fluid, consisting of an open tube pointing into the fluid and connected to a pressure-indicating device. Also known as impact tube.

597      positron camera      Effect      Engineering

An instrument that uses photomultiplier tubes in combination with scintillation counters to detect oppositely directed gamma-ray pairs resulting from the annihilation with electrons of positrons emitted by short-lived radioisotopes used as tracers in the human body.

5949      x-ray diffractometer      Effect      Engineering

An instrument used in x-ray analysis to measure the intensities of the diffracted beams at different angles.

5937      vaporimeter      Effect      Engineering

An instrument used to measure a substance's vapor pressure, especially that of an alcoholic liquid, in order to determine its alcohol content.

5910      ultrasonic leak detector      Effect      Engineering

An instrument which detects ultrasonic energy resulting from the transition from laminar to turbulent flow of a gas passing through an orifice.

5909      mercury barometer      Effect      Engineering

An instrument which determines atmospheric pressure by measuring the height of a column of mercury which the atmosphere will support; the mercury is in a glass tube closed at one end and placed, open end down, in a well of mercury. Also known as Torricellian barometer.

5899      spring balance      Effect      Engineering

An instrument which measures force by determining the extension of a helical spring.

6014      photoelectric pyrometer      Effect      Engineering

An instrument that measures high temperatures by using a photoelectric arrangement to measure the radiant energy given off by the heated object.

618      viscometer      Effect      Engineering

An instrument designed to measure the viscosity of a fluid.

14470      rail      Effect      Engineering

1. A bar extending between posts or other supports as a barrier or guard. 2. A steel bar resting on the crossties to provide track for railroad cars and other vehicles with flanged wheels.

3      buckling      Effect      Engineering

Wrinkling or warping of fibers in a composite material.

629      dust explosion      Effect      Engineering

An explosion following the ignition of flammable dust suspended in the air.

6246      solar furnace      Effect      Engineering

An image furnace in which high temperatures are produced by focusing solar radiation.

6229      hot stamp      Effect      Engineering

An impression on a forging made in a heated condition.

6207      low-frequency induction furnace      Effect      Engineering

An induction furnace in which current flow at the commercial power-line frequency is induced in the charge to be heated.

6206      high-frequency furnace      Effect      Engineering

An induction furnace in which the heat is generated within the charge, within the walls of the containing crucible, or within

both, by currents induced by 270 high-vacuum insulation high-frequency magnetic flux produced by a surrounding coil.

Also known as coreless-type induction furnace; high-frequency heater.

6185      x-ray telescope      Effect      Engineering

An instrument designed to detect x-rays emanating from a source outside the earth's atmosphere and to resolve the x-rays into an image; they are carried to high altitudes by balloons, rockets, or space vehicles; although several types of x-ray detector, involving gas counters, scintillation counters, and collimators, have been used, only one, making use of the phenomenon of total external reflection of x-rays from a surface at grazing incidence, is strictly an x-ray telescope.

6144      compass      Effect      Engineering

An instrument for indicating a horizontal reference direction relative to the earth.

6182      radio atmometer      Effect      Engineering

An instrument designed to measure the effect of sunlight upon evaporation from plant foliage; consists of a porous- clay atmometer whose surface has been blackened so that it absorbs radiant energy.

6145      atom probe      Effect      Engineering

An instrument for identifying a single atom or molecule on a metal surface; it consists of a field ion microscope with a probe hole in its screen opening into a mass spectrometer; atoms that are removed from the specimen by pulsed field evaporation fly through the probe hole and are detected in the mass spectrometer.

6690      sonic anemometer      Effect      Engineering

An anemometer which measures wind speed by means of the properties of wind-borne sound waves; it operates on the principle that the propagation velocity of a sound wave in a moving medium is equal to the velocity of sound with respect to the medium plus the velocity of the medium.

616      stadimeter      Effect      Engineering

An instrument for determining the distance to an object, but its height must be known; the angle subtended by the object's bottom and top as measured at the observer's position is proportional to the object's height; the instrument is graduated directly in distance.

6159      Ewing's hysteresis tester      Effect      Engineering

An instrument for determining the hysteresis loss of a specimen of magnetic material by measuring the deflection of a horseshoe magnet when the specimen is rapidly rotated between the poles of the magnet and the magnet is allowed to rotate about an axis that is aligned with the axis of rotation of the specimen.

6158      Curle balance      Effect      Engineering

6154	Doppler ultrasonic flowmeter	Effect	Engineering
------	------------------------------	--------	-------------

6153	volumenometer	Effect	Engineering
------	---------------	--------	-------------

6150	venturi meter	Effect	Engineering
------	---------------	--------	-------------

5694	minimum thermometer	Effect	Engineering
------	---------------------	--------	-------------

10596	vapor-phase axial deposition	Effect	Engineering
-------	------------------------------	--------	-------------

4252	radiation oven	Effect	Engineering
------	----------------	--------	-------------

5879	torsion balance	Effect	Engineering
------	-----------------	--------	-------------

4667	friction-tube viscometer	Effect	Engineering
------	--------------------------	--------	-------------

4655	photoelectric fluorometer	Effect	Engineering
------	---------------------------	--------	-------------

Copyright 2005 Waldo.Hitcher@googlemail.com    [Click Here for Terms of Use](#)

electrons have been raised to higher energy level) by ultraviolet or visible light; used for analysis of chemical mixtures.

4646      molding shrinkage      Effect      Engineering

Difference in dimensions between the molding and the mold cavity, measured at normal room temperature.

460      blasthole drilling      Effect      Engineering

Drilling to produce a series of holes for placement of blasting charges. blasting

4472      prefilter      Effect      Engineering

Filter used to remove gross solid contaminants before the liquid stream enters a separator-filter.

4399      frequency-modulated radar      Effect      Engineering

Form of radar in which the radiated wave is frequency modulated, and the returning echo beats with the wave being radiated, thus enabling range to be measured.

4357      induction burner      Effect      Engineering

Fuel-air burner into which the fuel is fed under pressure to entrain needed air into the combustion nozzle area. induction charging

473      vacuum evaporation      Effect      Engineering

Deposition of thin films of metal or other materials on a substrate, usually through openings in a mask, by evaporation from a boiling source in a hard vacuum.

4253      resistor oven      Effect      Engineering

Heating chamber relying on an electrical-resistance element to create temperatures of up to 800 °F (430 °C); used for drying and baking.

4756      sawing      Effect      Engineering

Cutting with a saw.

4239      microwave early warning      Effect      Engineering

High-power, long-range radar with a number of indicators, giving high resolution, and with a large traffichandling capacity; used for early warning of missiles.

4238      press polish      Effect      Engineering

High-sheen finish on plastic sheet stock produced by contact with a smooth metal under heat and pressure.

3979      premix      Effect      Engineering

In plastics molding, materials in which the resin, reinforcement, extenders, fillers, and so on have been premixed before

molding.

3865      hot-gas welding      Effect      Engineering

Joining of thermoplastic materials by softening first with a jet of hot air, then joining at the softened points.

3852      infiltration      Effect      Engineering

Leakage of outdoor air into a building by natural forces, for example, by seepage through cracks or other openings.

14143      seal      Effect      Engineering

1. Any device or system that creates a nonleaking union between two mechanical or process-system elements; for example, gaskets for pipe connection seals, mechanical seals for rotating members such as pump shafts, and liquid seals to prevent gas entry to or loss from a gas-liquid processing sequence. 2. A tight, perfect closure or joint.

3746      bubble test      Effect      Engineering

Measurement of the largest opening in the mesh of a filter screen; determined by the pressure needed to force air or gas through the screen while it is submerged in a liquid.

13900      screening      Effect      Engineering

1. The separation of a mixture of grains of various sizes into two or more sizerange portions by means of a porous or wovenmesh screening media. 2. The removal of solid particles from a liquid-solid mixture by means of a screen. 3. The material that has passed through a screen.

4259      vitrification      Effect      Engineering

Heat treatment of a material such as a ceramic to produce a glazed surface.

5315      gravity corer      Effect      Engineering

Any type of corer that achieves bottom penetration solely as a result of gravitational force acting upon its mass.

3709      chill-roll extrusion      Effect      Engineering

Method of extruding plastic film in which the film is cooled while being drawn around two or more highly polished chill rolls, inside of which there is cooling water.

568      sonoscan      Effect      Engineering

A type of acoustic microscope in which an unfocused acoustic beam passes through the object and produces deformations in a liquid-solid interface that are sensed by a laser beam reflected from the surface.

5677      Danjon prismatic astrolabe      Effect      Engineering

A type of astrolabe in which a Wollaston prism just inside the focus of the telescope converts converging beams of light

into parallel beams, permitting a great increase in accuracy daraf

5597      motion picture projector      Effect      Engineering

An optical and mechanical device capable of flashing pictures taken by a motion picture camera on a viewing screen at the same frequency the action was photographed, thus producing an image that appears to move.

5486      blast cleaning      Effect      Engineering

Any cleaning process in which an abrasive is directed at high velocity toward the surface being cleaned, for example, sand blasting.

5456      telescope      Effect      Engineering

Any device that collects radiation, which may be in the form of electromagnetic or particle radiation, from a limited direction in space.

5410      cock      Effect      Engineering

Any mechanism which starts, stops, or regulates the flow of liquid, such as a valve, faucet, or tap.

5377      relief hole      Effect      Engineering

Any of the holes fired afterthe 455 relief valve cut holes and before the lifter holes in breaking ground for tunneling or shaft sinking.

4713      aviation method      Effect      Engineering

Determination of knocklimiting power, under lean-mixture conditions, of fuels used in spark-ignition aircraft engines.

5317      snorkel      Effect      Engineering

Any tube which supplies air for an underwater operation, whether it be for material or personnel.

5848      mirror interferometer      Effect      Engineering

An interferometer used in radio astronomy, in which the sea surface acts as a mirror to reflect radio waves up to a single antenna, where the reflected waves interfere with the waves arriving directly from the source.

531      gravity conveyor      Effect      Engineering

Any unpowered conveyor such as a gravity chute or a roller conveyor, which uses the force of gravity to move materials over a downward path.

5282      suction line      Effect      Engineering

A pipe ortubing feeding into the inlet of a fluid impelling device (for example, pump, compressor, or blower), consequently under suction.



5122	vibrating-reed tachometer	Effect	Engineering
Atachometer consisting of a group of reeds of different lengths, each having a specific natural frequency of vibration; observation of the vibrating reed when in contact with a moving mechanical device indicates the frequency of vibration for the device.			
13979	micromechanics	Effect	Engineering
1. The design and fabrication of micromechanisms. 2. See composite micromechanics.			
5033	Langmuir diffusion pump	Effect	Engineering
Atypeof diffusion pump in which the mercury vapor emerges from a nozzle, giving it motion in a direction away from the high-vacuum side of the pump. lantern			
4895	sonic cleaning	Effect	Engineering
Cleaning of contaminated materials by the action of intense sound in the liquid in which the material is immersed.			
4873	surface combustion	Effect	Engineering
Combustion brought about near the surface of a heated refractory material by forcing a mixture of air and combustible gases through it or through a hole in it, or having the gas impinge directly upon it; used in muffles, crucibles, and certain types of boiler furnaces.			
4787	reeding	Effect	Engineering
Corrugating or serrating, as in coining or embossing.			
5344	electrothermal process	Effect	Engineering
Any process which uses an electric current to generate heat, utilizing resistance, arcs, or induction; used to achieve temperatures higher than can be obtained by combustion methods.			
11628	nuclear gyroscope	Effect	Engineering
A gyroscope in which the conventional spinning mass is replaced by the spin of atomic nuclei and electrons; one version uses optically pumped mercury isotopes, and another uses nuclear magnetic resonance techniques.			
80	remote manipulation	Effect	Engineering
Use of mechanical equipment controlled from a distance to handle materials, such as radioactive materials. Also known as teleoperation.			
11624	nuclear magnetic resonance	Effect	Engineering
A gyroscope that obtains information from the dynamic angular motion of atomic nuclei. nuclear magnetometer			

12654	sediment trap	Effect	Engineering
A device for measuring the accumulation rate of sediment on the floor of a body of water.			
12220	manometer	Effect	Engineering
A double-leg liquid-column gage used to measure the difference between two fluid pressures.			
11978	nuclear magnetic resonance flowmeter	Effect	Engineering
A flowmeter in which nuclei of the flowing fluid are resonated by a radio-frequency field superimposed on an intense permanent magnetic field, and a detector downstream measures the amount of decay of the resonance, thereby sensing fluid velocity.			
12200	telescopic derrick	Effect	Engineering
A drill derrick divided into two or more sections, with the uppermost sections nesting successively into the lower sections.			
11627	electrically suspended gyro	Effect	Engineering
A gyroscope in which the main rotating element is suspended by an electromagnetic or an electrostatic field.			
12757	ground magnetic survey	Effect	Engineering
A determination of the magnetic field at the surface of the earth by means of ground-based instruments. groundman			
12378	strain gage	Effect	Engineering
A device which uses the change of electrical resistance of a wire under strain to measure pressure.			
12896	magneto anemometer	Effect	Engineering
A cup anemometer with its shaft mechanically coupled to a magnet; both the frequency and amplitude of the voltage generated are proportional to the wind speed, and may be indicated or recorded by suitable electrical instruments.			
10762	nutator	Effect	Engineering
A mechanical or electrical device used to move a radar beam in a circular, conical, spiral, or other manner periodically to obtain greater air surveillance than could be obtained with a stationary beam.			
89	spectrometerion machining	Effect	Engineering
Use of a high-velocity ion beam to remove material from a surface. Also known as ion beam thinning, ion milling.			
10922	Kapitza balance	Effect	Engineering
A magnetic balance for measuring susceptibilities of materials in large magnetic fields that are applied for brief periods. Kapitza expander			
12425	vacuum breaker	Effect	Engineering

A device used to relieve a vacuum formed in a water supply line to prevent backflow. Also known as backflow preventer.

vacuum cleaner

12429	flamethrower	Effect	Engineering
-------	--------------	--------	-------------

A device used to project ignited fuel from a nozzle so as to cause casualties to personnel or to destroy material such as weeds or insects.

11686	gravity chute	Effect	Engineering
-------	---------------	--------	-------------

A gravity conveyor in the form of an inclined plane, trough, or framework that depends on sliding friction to control the rate of descent.

10752	pressure pillow	Effect	Engineering
-------	-----------------	--------	-------------

A mechanical-hydraulic snow gage consisting of a circular rubber or metal pillow filled with a solution of antifreeze and water, and containing either a pressure transducer or a riser pipe to record increase in pressure of the snow.

7	rotating viscometer vacuum gage	Effect	Engineering
---	---------------------------------	--------	-------------

Vacuum (reduced-pressure) measurement device in which the torque on a spinning armature is proportional to the viscosity (and the pressure) of the rarefied gas being measured; sensitive for absolute pressures of 1 millimeter of mercury (133.32 pascals), down to a few tens of micrometers.

10875	telltale	Effect	Engineering
-------	----------	--------	-------------

A marker on the outside of a tank that indicates on an exterior scale the amount of fluid inside the tank.

11210	limelight	Effect	Engineering
-------	-----------	--------	-------------

A light source once used in spotlights; it consisted of a block of lime heated to incandescence by means of an oxyhydrogen flame torch.

11087	capillary viscometer	Effect	Engineering
-------	----------------------	--------	-------------

A long, narrow tube that is used to measure the laminar flow of fluids.

12714	breaking pin device	Effect	Engineering
-------	---------------------	--------	-------------

A device designed to relieve pressure resulting from inlet static pressure by the fracture of a loaded part of a pin.

52	granular-bed separator	Effect	Engineering
----	------------------------	--------	-------------

Vessel or chamber in which a bed of granular material is used to remove dust from a dust-laden gas as it passes through the bed.

11098	rotary kiln	Effect	Engineering
-------	-------------	--------	-------------

A long cylindrical kiln lined with refractory, inclined at a slight angle, and rotated at a slow speed.

11560 thermoacoustic engine Effect Engineering

A heat engine that harnesses the combination of the pressure oscillations of a sound wave with the accompanying adiabatic temperature oscillations.

11203 no-go gage Effect Engineering

A limit gage designed not to fit a part being tested; usually employed with a go gage to set the acceptable maximum and minimum dimension limits of the part.

12658 vibrating wire transducer Effect Engineering

A device for measuring ocean depth, consisting of a very fine tungsten wire stretched in a magnetic field so that it vibrates at a frequency that depends on the tension in the wire, and thereby on pressure and depth.

11245 pressure dye test Effect Engineering

A leak detection method in which a pressure vessel is filled with liquid dye and is pressurized under water to make possible leakage paths visible.

13219 Six's thermometer Effect Engineering

A combination maximum thermometer and minimum thermometer; the tube is shaped in the form of a U with a bulb 5/6 factor at either end; one bulb is filled with creosote which expands or contracts with temperature variation, forcing before it a short column of mercury having iron indexes at either end; the indexes remain at the extreme positions reached by the mercury column, thus indicating the maximum and minimum temperatures; the indexes can be reset with the aid of a magnet.

1336 transfer chute Effect Engineering

A chute used at a transfer point in a conveyor system; the chute is designed with a curved base or some other feature so that the load be discharged in a centralized stream and in the same direction as the receiving conveyor.

11587 wire stripper Effect Engineering

A hand-operated tool or special machine designed to cut and remove the insulation for a predetermined distance from the end of an insulated wire, without damaging the solid or stranded wire inside.

11492 getter-ion pump Effect Engineering

A high-vacuum pump that employs chemically active metal layers which are continuously or intermittently deposited on the wall of the pump, and which chemisorb active gases while inert gases are "cleaned up" by ionizing them in an electric discharge and drawing the positive ions to the wall, where the neutralized ions are buried by fresh deposits of metal. Also

known as sputter-ion pump.

11727	tape	Effect	Engineering
-------	------	--------	-------------

A graduated steel ribbon used, instead of a chain, in surveying.

13230	photoelectric colorimeter	Effect	Engineering
-------	---------------------------	--------	-------------

A colorimeter that uses a phototube or photocell, a set of color filters, an amplifier, and an indicating meter for quantitative determination of color.

617	electroscope	Effect	Engineering
-----	--------------	--------	-------------

An instrument for detecting an electric charge by means of the mechanical forces exerted between electrically charged bodies.

10896	U-tube manometer	Effect	Engineering
-------	------------------	--------	-------------

A manometer consisting of a U-shaped glass tube partly filled with a liquid of known specific gravity; when the legs of the manometer are connected to separate sources of pressure, the liquid rises in one leg and drops in the other; the difference between the levels is proportional to the difference in pressures and inversely proportional to the liquid's specific gravity. Also known as liquid-column gage.

10918	vibrating needle	Effect	Engineering
-------	------------------	--------	-------------

A magnetic needle used in compass adjustment to find the relative intensity of the horizontal components of the earth's magnetic field and the magnetic field at the compass location.

11225	photoelectric liquid-level indicator	Effect	Engineering
-------	--------------------------------------	--------	-------------

A level indicator in which rising liquid interrupts the light beam of a photoelectric control system; used in a tank or process vessel.

11805	far-infrared maser	Effect	Engineering
-------	--------------------	--------	-------------

A gas maser that generates a beam having a wavelength well above 100 micrometers, and ranging up to the present lower wavelength limit of about 500 micrometers for microwave oscillators.

10613	radio echo observation	Effect	Engineering
-------	------------------------	--------	-------------

A method of determining the distance of objects in the atmosphere or outer space, in which a radar pulse is directed at the object and the time that elapses from transmission of the pulse to reception of a reflected pulse is measured.

10615	autoclave molding	Effect	Engineering
-------	-------------------	--------	-------------

A method of curing reinforced plastics that uses an autoclave with 50-100 pounds per square inch (345-690 kilopascals)

12612	Penning trap	Effect	Engineering
-------	--------------	--------	-------------

10702	pressure vessel	Effect	Engineering
-------	-----------------	--------	-------------

78	acoustic radar	Effect	Engineering
----	----------------	--------	-------------

12556	self-timer	Effect	Engineering
-------	------------	--------	-------------

12192	telescopic tripod	Effect	Engineering
-------	-------------------	--------	-------------

76	neuromorphic engineering	Effect	Engineering
----	--------------------------	--------	-------------

12105	cartridge filter	Effect	Engineering
-------	------------------	--------	-------------

10663	moving-iron meter	Effect	Engineering
-------	-------------------	--------	-------------

11810	torsion galvanometer	Effect	Engineering
-------	----------------------	--------	-------------

12615	scrubber	Effect	Engineering
-------	----------	--------	-------------

79	radio prospecting	Effect	Engineering
----	-------------------	--------	-------------

12106	vacuum filter	Effect	Engineering
-------	---------------	--------	-------------

75	gamma-ray tracking	Effect	Engineering
----	--------------------	--------	-------------

10783	micromechanism	Effect	Engineering
-------	----------------	--------	-------------

12574	lazy jack	Effect	Engineering
-------	-----------	--------	-------------

10632	press bonding	Effect	Engineering
-------	---------------	--------	-------------

10749	spray	Effect	Engineering
-------	-------	--------	-------------

10602	auger drilling	Effect	Engineering
-------	----------------	--------	-------------

6394	Wiese formula	Law	Engineering
------	---------------	-----	-------------

Copyright 2005 Waldo.Hitcher@googlemail.com    [Click Here for Terms of Use](#)

587	plasma processing	Law	Engineering
Methods and technologies that utilize a plasma to treat and manufacture materials, generally through etching, deposition, or chemical alteration at a surface inside or at the boundary of the plasma.			
10566	analytical photogrammetry	Law	Engineering
A method of photogrammetry in which solutions are obtained by mathematical methods.			
3264	calorific value	Law	Engineering
Quantity of heat liberated on the complete combustion of a unit weight or unit volume of fuel.			
2273	Blears effect	Law	Engineering
The dependence of the signal from an ionization gage on the geometry of the system being measured when an organic vapor is present in the vacuum; the effect can falsify measurement results by up to an order of magnitude.			
207	footage	Law	Engineering
The extent or length of a material expressed in feet.			
13624	geophysical engineering	Law	Engineering
A branch of engineering that applies scientific methods for locating mineral deposits.			
3239	analytical radial triangulation	Law	Engineering
Radial triangulation performed by computational routines.			
4538	aerospace engineering	Law	Engineering
Engineering pertaining to the design and construction of aircraft and space vehicles and of power units, and to the special problems of flight in both the earth's atmosphere and space, as in the flight of air vehicles and in the launching, guidance, and control of missiles, earth satellites, and space vehicles and probes.			
13795	aerodynamic balance	Law	Engineering
A balance used for the measurement of the forces exerted on the surfaces of instruments exposed to flowing air; frequently used in tests made on models in wind tunnels.			
8052	Simon's theory	Law	Engineering
A theory of drilling which includes the effects of drilling by percussion and by vibration with a rotary (oil well) bit, cable tool, and pneumatic hammer; the rate of penetration of a chisel-shaped bit into brittle rock may be defined as follows: $R = NAfv/TTD$ , where R equals the rate of advance of bit, N equals the number of wings of bit, fv equals the number of impacts per unit time, D equals the diameter of the bit, and A equals the cross-sectional area of the crater at the periphery of the drill hole.			



11000	magnetic separator	Prime Effect	Engineering
A machine for separating magnetic from less magnetic or nonmagnetic materials by using strong magnetic fields; used for example, in tramp iron removal, or concentration and purification.			
4257	thermoelectric heating	Prime Effect	Engineering
Heating based on the Peltier effect, involving a device which is in principle the same as that used in thermoelectric cooling except that the current is reversed.			
4255	infrared heating	Prime Effect	Engineering
Heating by means of infrared radiation.			
4886	metal spraying	Prime Effect	Engineering
Coating a surface with droplets of molten metal or alloy by using a compressed gas stream.			
1329	sonic flaw detection	Prime Effect	Engineering
The process of locating imperfections in solid materials by observing internal reflections or a variation in transmission through the materials as a function of sound-path location.			
10600	freeze drying	Prime Effect	Engineering
A method of drying materials, such as certain foods, that would be destroyed by the loss of volatile ingredients or by drying temperatures above the freezing point; the material is frozen under high vacuum so that ice or other frozen solvent will quickly sublime and a porous solid remain.			
3413	cavitation	Prime Effect	Engineering
Pitting of a solid surface such as metal or concrete.			
14059	evaporative cooling	Prime Effect	Engineering
1. Lowering the temperature of a large mass of liquid by utilizing the latent heat of vaporization of a portion of the liquid. 2. Cooling air by evaporating water into it. 3. See vaporization cooling.			
2075	irradiation	Prime Effect	Engineering
The exposure of a material, object, or patient to x-rays, gamma rays, ultraviolet rays, or other ionizing radiation.			
13085	venturi tube	Prime Effect	Engineering
A constriction that is placed in a pipe and causes a drop in pressure as fluid flows through it, consisting essentially of a short straight pipe section or throat between two tapered sections; it can be used to measure fluid flow rate (a venturi meter), or to draw fuel into the main flow stream, as in a carburetor.			

14346	sieve	Prime Effect	Engineering
1. A meshed or perforated device or sheet through which dry loose material is refined, liquid is strained, and soft solids are comminuted.			
1423	radar	Prime Effect	Engineering
1. A system using beamed and reflected radio-frequency energy for detecting and locating objects, measuring distance or altitude, navigating, homing, bombing, and other purposes; in detecting and ranging, the time interval between transmission of the energy and reception of the reflected energy establishes the range of an object in the beam's path. Derived from radio detection and ranging. 2. See radar set.			
5472	transducer	Prime Effect	Engineering
Any device or element which converts an input signal into an output signal of a different form; examples include the microphone, phonograph pickup, loudspeaker, barometer, photoelectric cell, automobile horn, doorbell, and underwater sound transducer.			
3370	radio-frequency preheating	Prime Effect	Engineering
Preheating of plastics-molding materials by radio frequencies of 10-100 megahertz per second to facilitate the molding operation or to reduce the moldingcycle time. Abbreviated rf preheating.			
196	terahertz technology	Prime Effect	Engineering
The generation, detection, and application (such as in communications and imaging) of electromagnetic radiation roughly in the frequency range from 0.05 to 20 terahertz, corresponding to wavelengths from 6 millimeters down to 15 micrometers.			
14010	nanotechnology	Prime Effect	Engineering
1. Systems for transforming matter, energy, and information that are based on nanometer-scale components with precisely defined molecular features. 2. Techniques that produce or measure features less than 100 nanometers in size.			
10925	water-jet cutting	Prime Effect	Engineering
A machining method that uses a jet of pressurized water containing abrasive powder for cutting steel and other dense materials.			
3675	gravity feed	Prime Effect	Engineering
Movement of materials from one location to another using the force of gravity. gravity meter			
14410	x-ray microscope	Prime Effect	Engineering
1. A device in which an ultra-fine-focus x-ray tube or electron gun produces an electron beam focused to an extremely small image on a transmission-type x-ray target that serves as a vacuum seal; the magnification is by projection;			

specimens being examined can thus be in air, as also can the photographic film that records the magnified image.

10360    gravity bed    Prime Effect    Engineering

A moving body of solids in which particles (granules, pellets, beads, or briquets) flow downward by gravity through a vessel, while process fluid flows upward; the moving- bed technique is used in blast and shaft furnaces, petroleum catalytic cracking, pellet dryers, and coolers.

8145    magnetic resonance imaging    Prime Effect    Engineering

A technique in which an object placed in a spatially varying magnetic field is subjected to a pulse of radio-frequency radiation, and the resulting nuclear magnetic resonance spectra are combined to give cross-sectional images. Abbreviated MRI.

13623    mechatronics    Prime Effect    Engineering

A branch of engineering that incorporates the ideas of mechanical and electronic engineering into a whole, and, in particular, covers those areas of engineering concerned with the increasing integration of mechanical, electronic, and software engineering into a production process.

1075    vacuum drying    Prime Effect    Engineering

The removal of liquid from a solid material in a vacuum system; used to lower temperatures needed for evaporation to avoid heat damage to sensitive material.

13077    mechanical comparator    Prime Effect    Engineering

A contact comparator in which movement is amplified usually by a rack, pinion, and pointer or by a parallelogram arrangement.

7234    friction welding    Prime Effect    Engineering

A welding process for metals and thermoplastic materials in which two members are joined by rubbing the mating faces together under high pressure.

5615    solar collector    Prime Effect    Engineering

An installation designed to gather and accumulate energy in the form of solar radiation.

10526    ultrasonic cleaning    Prime Effect    Engineering

A method used to clean debris and swarf from surfaces by immersion in a solvent in which ultrasonic vibrations are

10642    ultrasonic sealing    Prime Effect    Engineering

A method for sealing plastic film by using localized heat developed by vibratory mechanical pressure at ultrasonic frequencies.

4260	convection cooling	Prime Effect	Engineering
Heat transfer by natural, upward flow of hot air from the device being cooled.			
11622	gyroscope	Prime Effect	Engineering
A gyroscope that senses, measures, and transmits angular displacement data.			
8592	sonic depth finder	Prime Effect	Engineering
A sonar-type instrument used to measure ocean depth and to locate underwater objects; a sound pulse is transmitted vertically downward by a piezoelectric or magnetostriction transducer mounted on the hull of the ship; the time required for the pulse to return after reflection is measured electronically. Also known as echo sounder.			
3436	self-cleaning	Prime Effect	Engineering
Pertaining to any device that is designed to clean itself without disassembly, for example, a filter in which accumulated filter cake or sludge is removed by an internal scraper or by a blowdown or backwash action.			
14108	shrinkage	Prime Effect	Engineering
1. Contraction of a molded material, such as metal or resin, upon cooling. 2. Contraction of a plastics casting upon polymerizing. shrink fit			
5509	variable-resistance accelerometer	Prime Effect	Engineering
Any accelerometer which operates on the principle that electrical resistance of any conductor is a function of its dimensions; when the dimensions of the conductor are varied mechanically, as constant current flows through it, the voltage across it varies as a function of this mechanical excitation; examples include the strain-gage accelerometer, and an accelerometer making use of a slide-wire potentiometer.			
14339	wedging	Prime Effect	Engineering
1. A method used in quarrying to obtain large, regular blocks of building stones; a row of holes is drilled, either by hand or by pneumatic drills, close to each other so that a longitudinal crevice is formed into which a gently sloping steel wedge is driven, and the block of stone can be detached without shattering.			
7697	vacuum freeze dryer	Prime Effect	Engineering
A type of indirect batch dryer used to dry materials that would be destroyed by the loss of volatile ingredients or by drying temperatures above the freezing point.			
6139	stroboscope	Prime Effect	Engineering
An instrument for making moving bodies visible intermittently, either by illuminating the object with brilliant flashes of light or by imposing an intermittent shutter between the viewer and the object; a high-speed vibration can be made visible by			

adjusting the strobe frequency close to the vibration frequency.

788      piezoresistive sensor      Prime Effect      Engineering

A transducer which converts variations in mechanical stress into an electrical output; it consists of an element of piezoresistive material that is connected to a Wheatstone bridge circuit and is placed on a highly stressed part of a suitable mechanical structure, usually attached to a cantilever or other beam configuration.

3914      induction heating      Prime Effect      Engineering

Increasing the temperature in a material by induced electric current. Also known as eddy-current heating.

3006      electrostatic separation      Prime Effect      Engineering

Separation of finely pulverized materials by placing them in electrostatic separators. Also known as hightension

3404      vacuum forming      Prime Effect      Engineering

Plastic-sheet forming in which the sheet is clamped to a stationary frame, then heated and drawn down into a mold by vacuum.

11967      self-sealing      Prime Effect      Engineering

A fluid container, such as a fuel tank or a tire, lined with a substance that allows it to close immediately over any small puncture or rupture.

62      vaporization cooling      Prime Effect      Engineering

Cooling by volatilization of a nonflammable liquid having a low boiling point and high dielectric strength; the liquid is flowed or sprayed on hot electronic equipment in an enclosure where it vaporizes, carrying the heat to the enclosure walls, radiators, or heat exchanger. Also known as evaporative cooling.

1249      thermoacoustic refrigerator      Prime Effect      Engineering

A device that uses acoustic power to pump heat from a region of low temperature to a region of ambient temperature.

## Engineering Acoustics

1162      absolute efficiency      Effect      Engineering Acoustics

The ratio of the power output of an electroacoustic transducer, under specified conditions, to the power output of an ideal electroacoustic transducer.

2276      acoustic jamming      Effect      Engineering Acoustics

The deliberate radiation or reradiation of mechanical or electroacoustic signals with the objectives of obliterating or obscuring signals which the enemy is attempting to receive and of deterring enemy weapons systems.

2343	electroacoustics	Effect	Engineering Acoustics
------	------------------	--------	-----------------------

The conversion of acoustic energy and waves into electric energy and waves, or vice versa.

## Industrial Engineering

509	containerization	Effect	Industrial Engineering
-----	------------------	--------	------------------------

The practice of placing cargo in large containers such as truck trailers to facilitate loading on and off ships and railroad flat cars.

1386	Pareto's law	Law	Industrial Engineering
------	--------------	-----	------------------------

The principle that in most activities a small fraction (around 20%) of the total activity accounts for a large fraction (around 80%) of the result. Also known as rule of 80-20.

396	cooling correction	Law	Industrial Engineering
-----	--------------------	-----	------------------------

In statistical quality control, the limits of acceptability placed on control charts; parts outside the limits are defective.

952	lambda dispatch	Law	Industrial Engineering
-----	-----------------	-----	------------------------

The solution of the problem of finding the most economical use of generators to supply a given quantity of electric power, using the method of Lagrange multipliers, which are symbolized  $\Lambda$ .

## Mechanical

790	acoustic fatigue	Effect	Mechanical
-----	------------------	--------	------------

The tendency of a material, such as a metal, to lose strength after acoustic stress.

1607	revolution	Effect	Mechanical
------	------------	--------	------------

The motion of a body around a closed orbit.

544	set forward	Effect	Mechanical
-----	-------------	--------	------------

Relative forward movement of component parts which occurs in a projectile, missile, or bomb in flight when impact occurs; the effect is due to inertia and is opposite in direction to setback.

52	strain energy	Effect	Mechanical
----	---------------	--------	------------

The potential energy stored in a body by virtue of an elastic deformation, equal to the work that must be done to produce this deformation.

3097	spin	Effect	Mechanical
------	------	--------	------------

Rotation of a body about its axis.

2290	structural deflections	Effect	Mechanical
The deformations or movements of a structure and its flexural members from their original positions.			
3458	plastic deformation	Effect	Mechanical
Permanent change in shape or size of a solid body without fracture resulting from the application of sustained stress beyond the elastic limit.			
4733	torsional hysteresis	Effect	Mechanical
Dependence of the torques in a twisted wire or rod not only on the present torsion of the object but on its previous history of torsion.			
1433	center of buoyancy	Important Law	Mechanical
The point through which acts the resultant force exerted on a body by a static fluid in which it is submerged or floating; located at the centroid of displaced volume. center of force			
1826	Newton's law of gravitation	Important Law	Mechanical
The law that every two particles of matter in the universe attract each other with a force that acts along the line joining them, and has a magnitude proportional to the product of their masses and inversely proportional to the square of the distance between them. Also known as law of gravitation.			
2015	gravitational force	Important Law	Mechanical
The force on a particle due to its gravitational attraction to other particles.			
2793	force	Important Law	Mechanical
That influence on a body which causes it to accelerate; quantitatively it is a vector, equal to the body's time rate of change of momentum.			
183	Newton's first law	Important Law	Mechanical
The law that a particle not subjected to external forces remains at rest or moves with constant speed in a straight line. Also known as first law of motion; Galileo's law of inertia.			
1814	Newton's third law	Important Law	Mechanical
The law that, if two particles interact, the force exerted by the first particle on the second particle (called the action force) is equal in magnitude and opposite in direction to the force exerted by the second particle on the first particle (called the reaction force).			
2105	kinetic energy	Important Law	Mechanical

The energy which a body possesses because of its motion; in classical mechanics, equal to one-half of the body's mass times the square of its speed.

1823      Newton's second law      Important Law      Mechanical

The law that the acceleration of a particle is directly proportional to the resultant external force acting on the particle and is inversely proportional to the mass of the particle. Also known as second law of motion.

2742      inertia      Important Law      Mechanical

That property of matter which manifests itself as a resistance to any change in the momentum of a body.

1596      leverage      Important Law      Mechanical

The multiplication of force or motion achieved by a lever lever shears

1816      Hooke's law      Important Law      Mechanical

The law that the stress of a solid is directly proportional to the strain applied to it.

833      Newtonian mechanics      Important Law      Mechanical

The system of mechanics based upon Newton's laws of motion in which mass and energy are considered as separate, conservative, mechanical properties, in contrast to their treatment in relativistic mechanics.

542      product of inertia      Important Law      Mechanical

Relative to two rectangular axes, the sum of the products formed by multiplying the mass (or, sometimes, the area) of each element of a figure by the product of the coordinates corresponding to those axes.

12046      center of gravity      Important Law      Mechanical

A fixed point in a material body through which the resultant force of gravitational attraction acts.

70      gyroscopic precession      Important Law      Mechanical

The turning of the axis of spin of a gyroscope as a result of an external torque acting on the gyroscope; the axis always turns toward the direction of the torque.

1675      tensile strength      Important Law      Mechanical

The maximum stress a material subjected to a stretching load can withstand without tearing. Also known as hot strength.

1191      sand hill analogy      Law      Mechanical

A formal identity between the differential equation and boundary conditions for a stress function for torsion of a perfectly plastic prismatic bar, and those for the height of the surface of a granular material, such as dry sand, which has a constant angle of rest.





11938	central force	Law	Mechanical
-------	---------------	-----	------------

11939	variable force	Law	Mechanical
-------	----------------	-----	------------

11940	repulsion	Law	Mechanical
-------	-----------	-----	------------

1194	rolling friction	Law	Mechanical
------	------------------	-----	------------

11943	apparent force	Law	Mechanical
-------	----------------	-----	------------

11945	external force	Law	Mechanical
-------	----------------	-----	------------

11946	internal force	Law	Mechanical
-------	----------------	-----	------------

11950	repeated load	Law	Mechanical
-------	---------------	-----	------------

1195	inelastic stress	Law	Mechanical
------	------------------	-----	------------

2874	fluid stress	Law	Mechanical
------	--------------	-----	------------

5797	material particle	Law	Mechanical
------	-------------------	-----	------------

122

a single point. Also known as particle.

4852      crushing strain      Law      Mechanical

Compression which causes the failure of a material.

2869      load stress      Law      Mechanical

Stress that results from a pressure or gravitational load.

1606      Poinsot motion      Law      Mechanical

The motion of a rigid body with a point fixed in space and with zero torque or moment acting on the body about the fixed point.

2870      cooling stress      Law      Mechanical

Stress resulting from uneven contraction during cooling of metals and ceramics due to uneven temperature distribution.

287      thermal shock      Law      Mechanical

Stress produced in a body or in a material as a result of undergoing 561 thermal soakback a sudden change in

2872      tensile stress      Law      Mechanical

Stress developed by a material bearing a tensile load.

2873      stress intensity      Law      Mechanical

Stress at a point in a structure due to pressure resulting from combined tension (positive) stresses and compression (negative) stresses.

5670      nonintegrablesystem      Law      Mechanical

Adynamicalsystem whose motion is governed by an equation that is not an integrable differential equation.

2868      membrane stress      Law      Mechanical

Stress which is equivalent to the average stress across the cross section involved and normal to the reference plane.

13965      funicular polygon      Law      Mechanical

1. The figure formed by a light string hung between two points from which weights are suspended at various points. 2. A force diagram for such a string, in which the forces (weights and tensions) acting on points of the string from which weights are suspended are represented by a series of adjacent triangles.

13960      static friction      Law      Mechanical

1. The force that resists the initiation of sliding motion of one body over the other with which it is in contact. 2. The force required to move one of the bodies when they are at rest. Also known as limiting friction; starting friction.

2875	melt strength	Law	Mechanical
Strength of a molten plastic.			
5577	forced oscillation	Law	Mechanical
An oscillation produced in a simple oscillator or equivalent mechanical system by an external periodic driving force. Also known as forced vibration.			
5513	static load	Law	Mechanical
A nonvarying load; the basal pressure exerted by the weight of a mass at rest, such as the load imposed on a drill bit by the weight of the drill-stem equipment or the pressure exerted on the rocks around an underground opening by the weight of the superimposed rocks. Also known as dead load.			
5504	deformation	Law	Mechanical
Any alteration of shape or dimensions of a body caused by stresses, thermal expansion or contraction, chemical or metallurgical transformations, or shrinkage and expansions due to moisture change.			
5500	Schuler pendulum	Law	Mechanical
Any apparatus which swings, because of gravity, with a natural period of 84.4 minutes, that is, with the same period as a hypothetical simple pendulum whose length is the earth's radius; the pendulum arm remains vertical despite any motion of its pivot, and the apparatus is therefore useful in navigation.			
2876	flexural strength	Law	Mechanical
Strength of a material in bending, that is, resistance to fracture.			
1134	setback force	Law	Mechanical
The rearward force of inertia which is created by the forward acceleration of a projectile or missile during its launching phase; the forces are directly proportional to the acceleration and mass of the parts being accelerated.			
1136	rotational resistance	Law	Mechanical
The real part of rotational impedance; it is responsible for dissipation of energy. Also known as mechanical rotational resistance.			
5423	factor of stress concentration	Law	Mechanical
Any irregularity producing localized stress in a structural member subject to load. Also known as fatigue-strength reduction factor.			
1396	thrust	Law	Mechanical

1. The force exerted in any direction by a fluid jet or by a powered screw.

5830      bending stress      Law      Mechanical

An internal tensile or compressive longitudinal stress developed in a beam in response to curvature induced by an external load.

5868      holonomic constraints      Law      Mechanical

An integrable set of differential equations which describe the restrictions on the motion of a system; a function relating several variables, in the form  $f(x_1, \dots, x_n) = 0$ , in optimization or physical problems.

5867      action      Law      Mechanical

An integral associated with the trajectory of a system in configuration space, equal to the sum of the integrals of the generalized momenta of the system over their canonically conjugate coordinates. Also known as phase integral.

2794      elastic recovery      Law      Mechanical

That fraction of a given deformation of a solid which behaves elastically elastic scattering

2795      ballistic wind      Law      Mechanical

That constant wind which would produce the same effect upon the trajectory of a projectile as the actual wind encountered in flight.

13938      shear strength      Law      Mechanical

1. The maximum shear stress which a material can withstand without rupture. 2. The ability of a material to withstand shear stress.

2797      dynamics      Law      Mechanical

That branch of mechanics which deals with the motion of a system of material particles under the influence of forces, especially those which originate outside the system under consideration.

280      entry ballistics      Law      Mechanical

That branch of ballistics which pertains to the entry of a missile, spacecraft, or other object from outer space into and through an atmosphere.

12912      Griffith's criterion      Law      Mechanical

A criterion for the fracture of a brittle material under biaxial stress, based on the theory that the strength of such a material is limited by small cracks.

447      angle of fall      Law      Mechanical

The vertical angle at the level point, between the line of fall and the base of the trajectory.

1126	torsional compliance	Law	Mechanical
------	----------------------	-----	------------

The reciprocal of the torsional rigidity.

442	bullet drop	Law	Mechanical
-----	-------------	-----	------------

The vertical drop of a bullet. bull gear

5874	deflecting torque	Law	Mechanical
------	-------------------	-----	------------

An instrument's moment, resulting from the quantity measured, that acts to cause the pointer's deflection.

13090	energy integral	Law	Mechanical
-------	-----------------	-----	------------

A constant of integration resulting from integration of Newton's second law of motion in the case of a conservative force; equal to the sum of the kinetic energy of the particle and the potential energy of the force acting on it.

13947	tangential velocity	Law	Mechanical
-------	---------------------	-----	------------

1. The instantaneous linear velocity of a body moving in a circular path; its direction is tangential to the circular path at the point in question. 2. The component of the velocity of a body that is perpendicular to a line from an observer or reference point to the body.

11846	Hamiltonian function	Law	Mechanical
-------	----------------------	-----	------------

A function of the generalized coordinates and momenta of a system, equal in value to the sum over the coordinates of the product of the generalized momentum corresponding to the coordinate, and the coordinate's time derivative, minus the Lagrangian of the system; it is numerically equal to the total energy if the Lagrangian does not depend on time explicitly; the equations of motion of the system are determined by the functional dependence of the Hamiltonian on the generalized coordinates and momenta.

2827	radial stress	Law	Mechanical
------	---------------	-----	------------

Tangential stress at the periphery of an opening.

13955	weight	Law	Mechanical
-------	--------	-----	------------

1. The gravitational force with which the earth attracts a body. 2. By extension, the gravitational force with which a star, planet, or satellite attracts a nearby body weight barometer

436	self-induced vibration	Law	Mechanical
-----	------------------------	-----	------------

The vibration of a mechanical system resulting from conversion, within the system, of nonoscillatory excitation to oscillatory excitation. Also known as selfexcited vibration.

283	gravitational systems of units	Law	Mechanical
Systems in which length, force, and time are regarded as fundamental, and the unit of force is the gravitational force on a standard body at a specified location on the earth's surface.			
2855	inelastic buckling	Law	Mechanical
Sudden increase of deflection or twist in a column when compressive stress reaches the elastic limit but before elastic buckling develops.			
2865	bonding strength	Law	Mechanical
Structural effectiveness of adhesives, welds, solders, glues, or of the chemical bond formed between the metallic and ceramic components of a cermet, when subjected to stress loading, for example, shear, tension, or compression.			
445	normal axis	Law	Mechanical
The vertical axis of an aircraft or missile.			
939	distance	Law	Mechanical
The spatial separation of two points, measured by the length of a hypothetical line joining them.			
6727	yardage	Law	Mechanical
An amount expressed in yards. yard crane See crane truck.			
6583	equivalent viscous damping	Law	Mechanical
An assumed value of viscous damping used in analyzing a vibratory motion, such that the dissipation of energy per cycle at resonance is the same for the assumed or the actual damping force.			
13126	stress concentration	Law	Mechanical
A condition in which a stress distribution has high localized stresses; usually induced by an abrupt change in the shape of a member; in the vicinity of notches, holes, changes in diameter of a shaft, and so forth, maximum stress is several times greater than where there is no geometrical discontinuity.			
2586	precession	Law	Mechanical
The angular velocity of the axis of spin of a spinning rigid body, which arises as a result of external torques acting on the body. precessional torque			
14279	static moment	Law	Mechanical
1. A scalar quantity (such as area or mass) multiplied by the perpendicular distance from a point connected with the quantity (such as the centroid of the area or the center of mass) to a reference axis. 2. The magnitude of some vector			

(such as force, momentum, or a directed line segment) multiplied by the length of a perpendicular dropped from the line of action of the vector to a reference point.

6564      ballistic wave      Law      Mechanical

An audible disturbance caused by compression of air ahead of a missile in flight.

257      analytic mechanics      Law      Mechanical

The application of differential and integral calculus to classical (nonquantum) mechanics.

2590      roll acceleration      Law      Mechanical

The angular acceleration of an aircraft or missile about its longitudinal or X axis.

938      bomb ballistics      Law      Mechanical

The special branch of ballistics concerned with bombs dropped from aircraft.

1366      Boussinesq's problem      Law      Mechanical

The problem of determining the stresses and strains in an infinite elastic body, initially occupying all the space on one side of an infinite plane, and indented by a rigid punch having the form of a surface of revolution with axis of revolution perpendicular to the plane. Also known as Cerruti's problem.

926      radius of gyration      Law      Mechanical

The square root of the ratio of the moment of inertia of a body about a given axis to its mass.

683      baromil      Law      Mechanical

The unit of length used in graduating a mercury barometer in the centimetergram-

13888      fiber stress      Law      Mechanical

1. The tensile or compressive stress on the fibers of a fiber metal or other fibrous material, especially when fiber orientation is parallel with the neutral axis. 2. Local stress through a small area (a point or line) on a section where the stress is not uniform, as in a beam under bending load.

452      impact velocity      Law      Mechanical

The velocity of a projectile or missile at the instant of impact. Also known as striking velocity.

11724      moment diagram      Law      Mechanical

A graph of the bending moment at a section of a beam versus the distance of the section along the beam.

334      rate of change of acceleration      Law      Mechanical

Time rate of change of acceleration; this rate is a factor in the design of some items of ammunition that undergo large



accelerations.

2700      contraction      Law      Mechanical

The action or process of becoming smaller or pressed together, as a gas on cooling.

1176      Krigar-Menzel law      Law      Mechanical

A generalization of the second Young-Helmholtz law which states that when a string is bowed at a point which is at a distance of  $p/q$  times the string's length from one of the ends, where  $p$  and  $q$  are relative primes, then the string moves back and forth with two constant velocities, one of which is  $q - 1$  times as large as the other.

453      relative velocity      Law      Mechanical

The velocity of a body with respect to a second body; that is, its velocity in a reference frame where the second body is fixed.

13895      proof stress      Law      Mechanical

1. The stress that causes a specified amount of permanent deformation in a material. 2. Aspecified stress to be applied 428 proportioning probe to a member or structure in order to assess its ability to support service loads.

11760      canonically conjugate variables      Law      Mechanical

A generalized coordinate and its conjugate momentum.

2589      yaw acceleration      Law      Mechanical

The angular acceleration of an aircraft or missile about its normal or Z axis.

454      detonating rate      Law      Mechanical

The velocity at which the explosion wave passes through a cylindrical charge.

11719      influence line      Law      Mechanical

A graph of the shear, stress, bending moment, or other effect of a movable load on a structural member versus the position of the load.

264      gravitational potential      Law      Mechanical

The amount of work which must be done against gravitational forces to move a particle of unit mass to a specified position from a reference position, usually a point at infinity.

2638      extensibility      Law      Mechanical

The amount to which a material can be stretched or distorted without breaking.

6522      axis of torsion      Law      Mechanical

An axis parallel to the generators of a cylinder undergoing torsion, located so that the displacement of any point on the axis lies along the axis. Also known as axis of twist.

2624      free-flight angle      Law      Mechanical

The angle between the horizontal and a line in the direction of motion of a flying body, especially a rocket, at the beginning of free flight.

2595      angle of torsion      Law      Mechanical

The angle through which a part of an object such as a shaft or wire is rotated from its normal position when a torque is applied. Also known as angle of twist.

259      pitch acceleration      Law      Mechanical

The angular acceleration of an aircraft or missile about its lateral, or Y, axis.

11759      palpable coordinate      Law      Mechanical

A generalized coordinate that appears explicitly in the Lagrangian of a system.

2518      instantaneous axis      Law      Mechanical

The axis about which a rigid body is carrying out a pure rotation at a given instant in time.

46      transverse vibration      Law      Mechanical

Vibration of a rod in which elements of the rod move at right angles to the axis of the rod.

6917      cyclic coordinate      Law      Mechanical

A generalized coordinate on which the Lagrangian of a system does not depend explicitly. Also known as ignorable coordinate.

6927      Rayleigh's dissipation function      Law      Mechanical

A function which enters into the equations of motion of a system undergoing small oscillations and represents frictional forces which are proportional to velocities; given by a positive definite quadratic form in the time derivatives of the coordinates.

11684      Kater's reversible pendulum      Law      Mechanical

A gravity pendulum designed to measure the acceleration of gravity and consisting of a body with two knifeedge supports on opposite sides of the center of mass.

6933      shearfracture      Law      Mechanical

A fracture resulting from shear stress.

6899	compressed air	Law	Mechanical
Air whose density is increased by subjecting it to a pressure greater than atmospheric pressure.			
6940	concentrated load	Law	Mechanical
A force that is negligible because of a small contact area; a beam supported on a girder represents a concentrated load on the girder.			
903	flow stress	Law	Mechanical
The stress along one axis at a given value of strain that is required to produce plastic deformation.			
2517	permanent axis	Law	Mechanical
The axis of the greatest moment of inertia of a rigid body, about which it can rotate in equilibrium.			
457	elements	Law	Mechanical
The various features of a trajectory such as the angle of departure, maximum ordinate, angle of fall, and so on.			
13885	velocity	Law	Mechanical
1. The time rate of change of position of a body; it is a vector quantity having direction as well as magnitude. Also known as linear velocity. 2. The speed at which the detonating wave passes through a column of explosives, expressed in meters or feet per second.			
2508	chaotic behavior	Law	Mechanical
The behavior of a system whose final state depends so sensitively on the system's precise initial state that the behavior is in effect unpredictable and cannot be distinguished from a random process, even though it is strictly determinate in a mathematical sense.			
2506	fixing moment	Law	Mechanical
The bending moment at the end support of a beam necessary to fix it and prevent rotation. Also known as fixed end moment.			
1375	conservation of angular momentum	Law	Mechanical
The principle that, when a physical system is subject only to internal forces that bodies in the system exert on each other, the total angular momentum of the system remains constant, provided that both spin and orbital angular momentum are taken into account.			
6939	friction	Law	Mechanical
A force which opposes the relative motion of two bodies whenever such motion exists or whenever there exist other forces which tend to produce such motion.			

2529	pitch attitude	Law	Mechanical
The attitude of an aircraft, rocket, or other flying vehicle, referred to the relationship between the longitudinal body axis and a chosen reference line or plane as seen from the side.			
11703	Mohr's circle	Law	Mechanical
A graphical construction making it possible to determine the stresses in a cross section if the principal stresses are			
253	Tresca criterion	Law	Mechanical
The assumption that plastic deformation of a material begins when the difference between the maximum and minimum principal stresses equals twice the yield stress in shear.			
2530	von Mises yield criterion	Law	Mechanical
The assumption that plastic deformation of a material begins when the sum of the squares of the principal components of the deviatoric stress reaches a certain critical value.			
1170	Bow's notation	Law	Mechanical
A graphical method of representing coplanar forces and stresses, using alphabetical letters, in the solution of stresses or in determining the resultant of a system of concurrent forces.			
6808	Siacci method	Law	Mechanical
An accurate and useful method for calculation of trajectories of highvelocity missiles with low quadrant angles of departure; basic assumptions are that the atmospheric density anywhere on the trajectory is approximately constant, and the angle of departure is less than about 15°.			
456	closing line	Law	Mechanical
The vector required to complete a polygon consisting of a set of vectors whose sum is zero (such as the forces acting on a body in equilibrium).			
6823	elastic buckling	Law	Mechanical
An abrupt increase in the lateral deflection of a column at a critical load while the stresses acting on the column are wholly elastic.			
1362	three-body problem	Law	Mechanical
The problem of predicting the motions of three objects obeying Newton's laws of motion and attracting each other according to Newton's law of gravitation.			
6866	shear strain	Law	Mechanical

Also known as shear. 1. A deformation of a solid body in which a plane in the body is displaced parallel to itself relative to parallel planes in the body; quantitatively, it is the displacement of any plane relative to a second plane, divided by the perpendicular distance between planes. 2. The force causing such deformation.

6867      rotation      Law      Mechanical

Also known as rotational motion. 1. Motion of a rigid body in which either one point is fixed, or all the points on a straight line are fixed. 2. Angular displacement of a rigid body. 3. The motion of a particle about a fixed point.

6869      perch      Law      Mechanical

Also known as pole; rod. 1. A unit of length, equal to 5.5 yards, or 16.5 feet, or 5.0292 meters. 2. A unit of area, equal to 30.25 square yards, or 272.25 square feet, or 25.29285264 square meters.

904      bulk strength      Law      Mechanical

The strength per unit volume of a solid.

6873      Coriolis effect      Law      Mechanical

Also known as Coriolis deflection. 1. The deflection relative to the earth's surface of any object moving above the earth, caused by the Coriolis force; an object moving horizontally is deflected to the right in the Northern Hemisphere, to the left in the Southern. 2. The effect of the Coriolis force in any rotating system.

689      bending moment      Law      Mechanical

Algebraic sum of all moments located between a cross section and one end of a structural member; a bending moment that bends the beam convex downward is positive, and one that bends it convex upward is negative.

11695      velocity analysis      Law      Mechanical

A graphical technique for the determination of the velocities of the parts of a mechanical device, especially those of a plane mechanism with rigid component links.

272      pounds per square inch absolute      Law      Mechanical

The absolute, thermodynamic pressure, measured by the number of pounds-force exerted on an area of 1 square inch. Abbreviated lbf in.<sup>2</sup>abs; psia. pounds per square inch differential

380      differential effects      Law      Mechanical

The effects upon the elements of the trajectory due to variations from standard conditions.

390      initial yaw      Law      Mechanical

The yaw of a projectile the instant it leaves the muzzle of a gun.

385	orbital angular momentum	Law	Mechanical
The angular momentum associated with the motion of a particle about an origin, equal to the cross product 383 orbital moment of the position vector with the linear momentum.			
2735	breaking strength	Law	Mechanical
The ability of a material to resist breaking or rupture from a tension force.			
1032	mechanomotive force	Law	Mechanical
The root-meansquare value of a periodically varying force. mechanooptical vibrometer			
2737	hydrostatic strength	Law	Mechanical
The ability of a body to withstand hydrostatic stress.			
626	Hookean solid	Law	Mechanical
An ideal solid which obeys Hooke's law exactly for all values of stress, however large.			
2739	ballistic temperature	Law	Mechanical
That temperature (in °F) which, when regarded as a surface temperature and used in conjunction with the lapse rate of the standard artillery atmosphere, would produce the same effect on a projectile as the actual temperature distribution encountered by the projectile in flight.			
6263	Kelvin body	Law	Mechanical
An ideal body whose shearing (tangential) stress is the sum of a term proportional to its deformation and a term proportional to the rate of change of its deformation with time. Also known as Voigt body.			
2720	acceleration of free fall	Law	Mechanical
The acceleration imparted to bodies by the attractive force of the earth; has an international standard value of 980.665 cm/s <sup>2</sup> but varies with latitude and elevation. Also known as acceleration of free fall; apparent gravity.			
1022	Lanchester's rule	Law	Mechanical
The rule that a torque applied to a rotating body along an axis large-systems control theory perpendicular to the rotation axis will produce precession in a direction such that, if the body is viewed along a line of sight coincident with the torque axis, then a point on the body's circumference, which initially crosses the line of sight, will appear to describe an ellipse whose sense is that of the torque.			
6277	stress crack	Law	Mechanical
An external or internal crack in a solid body (metal or plastic) caused by tensile, compressive, or shear forces. stress difference			

6279	body force	Law	Mechanical
An external force, such as gravity, which acts on all parts of a body.			
13905	yaw	Law	Mechanical
1. The rotational or oscillatory movement of a ship, aircraft, rocket, or the like about a vertical axis. Also known as yawing.			
2. The amount of this movement, that is, the angle of yaw. 3. To rotate or oscillate about a vertical axis.			
38	local structural discontinuity	Law	Mechanical
The effect of intensified stress on a small portion of a structure.			
1047	recovery	Law	Mechanical
The return of a body to its original dimensions after it has been stressed, possibly over a considerable period of time.			
11843	compressadensity function	Law	Mechanical
A function used in the acoustic levitation technique to determine either the density or the adiabatic compressibility of a submicroliter droplet suspended in another liquid, if the other property is known.			
13184	state of stress	Law	Mechanical
A complete description, including the six components of stress, of a homogeneously stressed volume.			
2760	elastic center	Law	Mechanical
That point of a beam in the plane of the section lying midway between the flexural center and the center of twist in that section.			
2759	center of mass	Law	Mechanical
That point of a material body or system of bodies which moves as though the system's total mass existed at the point and all external forces were applied at the point. Also known as center of inertia; centroid.			
13917	elasticity	Law	Mechanical
1. The property whereby a solid material changes its shape and size under action of opposing forces, but recovers its original configuration when the forces are removed.			
1038	fulcrum	Law	Mechanical
The rigid point of support about which a lever pivots.			
13112	cone of friction	Law	Mechanical
A cone in which the resultant force exerted by one flat horizontal surface on another must be located when both surfaces are at rest, as determined by the coefficient of static friction.			

2878	rotational strain	Law	Mechanical
Strain in which the orientation of the axes of strain is changed.			
13914	jerk	Law	Mechanical
1. The rate of change of acceleration; it is the third derivative of position with			
2743	brittleness	Law	Mechanical
That property of a material manifested by fracture without appreciable prior plastic deformation.			
13912	factor of safety	Law	Mechanical
1. The ratio between the breaking load on a member, appliance, or hoisting rope and the safe permissible load on it. Also known as safety factor. 2. See factor of stress intensity.			
6243	axis of symmetry	Law	Mechanical
An imaginary line about which a geometrical figure is symmetric.			
2740	offset yield strength	Law	Mechanical
That stress at which the strain surpasses by a specific amount (called the offset) an extension of the initial proportional portion of the stress-strain curve; usually expressed in pounds per square inch.			
625	rigid body	Law	Mechanical
An idealized extended solid whose size and shape are definitely fixed and remain unaltered when forces are applied. rigid-body dynamics			
2750	descending branch	Law	Mechanical
That portion of a trajectory which is between the summit and the point where the trajectory terminates, either by impact or air burst, and along which the projectile falls, with altitude constantly decreasing.			
12945	spin-decelerating moment	Law	Mechanical
A couple about the axis of the projectile, which diminishes spin.			
6280	surface force	Law	Mechanical
An external force which acts only on the surface of a body; an example is the force exerted by another object with which the body is in contact.			
345	Morera's stress functions	Law	Mechanical
Three functions of position, $\phi$ , $\psi$ , and $\chi$ , in terms of which the elements of the stress tensor $\sigma$ of a body may be expressed, if the body is in equilibrium and is not subjected to body forces; the elements of the stress tensor are given by			



$\sigma_{11} = -252 \frac{1}{dx_2 dx_3}$ ,  $\sigma_{23} = d^2 f_2 / dx_1 dx_2 + d^2 f_3 / dx_1 dx_3$ , and cyclic permutations of these equations.

634      hydrostatic balance      Law      Mechanical

An equal-arm balance in which an object is weighed first in air and then in a beaker of water to determine its specific

2685      spring modulus      Law      Mechanical

The additional force necessary to deflect a spring an additional unit distance; if a certain spring has a modulus of 100 newtons per centimeter, a 100-newton weight will compress it 1 centimeter, a 200-newton weight 2 centimeters, and so

2684      frictional grip      Law      Mechanical

The adhesion between the wheels of a locomotive and the rails of the railroad track.

346      Maxwell's stress functions      Law      Mechanical

Three functions of position,  $\sigma_{11}$ ,  $\sigma_{22}$ , and  $\sigma_{33}$ , in terms of which the elements of the stress tensor  $\sigma$  of a body may be expressed, if the body is in equilibrium and is not subjected to body forces; the elements of the stress tensor are given by  $\sigma_{11} = 624 \sigma_{22} / 3 + 524 \sigma_{33} / 3$ ,  $\sigma_{23} = -d^2 f_1 / dx_2 dx_3$ , and cyclic permutations of these equations.

2674      stress range      Law      Mechanical

The algebraic difference between the maximum and minimum stress in one fatigue test cycle.

347      Euler angles      Law      Mechanical

Three angular parameters that specify the orientation of a body with respect to reference axes.

6374      supported end      Law      Mechanical

An end of a structure, such as a beam, whose position is fixed but whose orientation may vary; for example, an end supported on a knife-edge.

6375      fixed end      Law      Mechanical

An end of a structure, such as a beam, that is clamped in place so that both its position and orientation are fixed.

344      Newton's laws of motion      Law      Mechanical

Three fundamental principles (called Newton's first, second, and third laws) which form the basis of classical, or Newtonian, mechanics, and have proved valid for all mechanical problems not involving speeds comparable with the speed of light and not involving atomic or subatomic particles.

13125      weightlessness      Law      Mechanical

A condition in which no acceleration, whether of gravity or other force, can be detected by an observer within the system in question. Also known as zero gravity.

45	Newtonian velocity	Law	Mechanical
The velocity of an object in a Newtonian reference frame, S, which can be determined from the velocity of the object in any other such frame, S', by taking the vector sum of the velocity of the object in S' and the velocity of the frame S' relative			
6405	inertia ellipsoid	Law	Mechanical
An ellipsoid used in describing the motion of a rigid body; it is fixed in the body, and the distance from its center to its surface in any direction is inversely proportional to the square root of the moment of inertia about the corresponding axis. Also known as Poinso			
449	settling velocity	Law	Mechanical
The velocity reached by a particle as it falls through a fluid, dependent on its size and shape, and the difference between its specific gravity and that of the settling medium; used to sort particles by grain size.			
64	equivalent twisting moment	Law	Mechanical
A twisting moment which, if acting alone, would produce in a circular shaft a shear stress of the same magnitude as the shear stress produced by a given twisting moment and a given bending moment acting simultaneously.			
6293	Melde's experiment	Law	Mechanical
An experiment to study transverse vibrations in a long, horizontal thread when one end of the thread is attached to a prong of a vibrating tuning fork, while the other passes over a pulley and has weights suspended from it to control the tension in the thread.			
2699	warpage	Law	Mechanical
The action, process, or result of twisting or turning out of shape.			
448	quadrant angle of fall	Law	Mechanical
The vertical acute angle at the level point, between the horizontal and the line of fall of a projectile.			
372	flexure theory	Law	Mechanical
Theory of the deformation of a prismatic beam having a length at least 10 times its depth and consisting of a material obeying Hooke's law, in response to stresses within the elastic limit.			
37	elastic theory	Law	Mechanical
Theory of the relations between the forces acting on a body and the resulting changes in dimensions.			
6338	pile formula	Law	Mechanical
An equation for the forces acting on a pile at equilibrium: $P = pA + tS + S_n \sin 4>$ , where P is the load, A is the area of the			

pile point,  $p$  is the force per unit area on the point,  $S$  is the embedded surface of the pile,  $t$  is the force per unit area parallel to  $S$ ,  $n$  is the force per unit area normal to  $S$ , and  $\phi$  is the taper angle of the pile.

369      equivalent nitrogen pressure      Law      Mechanical

The pressure that would be indicated by a device if the gas inside it were replaced by nitrogen of equivalent 201 equivalent noise pressure molecular density.

13103      shear plane      Law      Mechanical

A confined zone along which fracture occurs in metal cutting.

1012      exterior ballistics      Law      Mechanical

The science concerned with behavior of a projectile after leaving the muzzle of the firing weapon.

101      fluid mechanics      Law      Mechanical

The science concerned with fluids, either at rest or in motion, and dealing with pressures, velocities, and accelerations in the fluid, including fluid deformation and compression or expansion.

358      work-kinetic energy theorem      Law      Mechanical

The theorem that the change in the kinetic energy of a particle during a displacement is equal to the work done by the resultant force on the particle during this displacement.

356      friction torque      Law      Mechanical

The torque which is produced by frictional forces and opposes rotational motion, such as that associated with journal or sleeve bearings in machines.

269      angle of impact      Law      Mechanical

The acute angle between the tangent to the trajectory at the point of impact of a projectile and the plane tangent to the surface of the ground or target at the point of impact.

1010      interior ballistics      Law      Mechanical

The science concerned with the combustion of powder, development of pressure, and movement of a projectile in the bore of a gun.

638      directional gyro      Law      Mechanical

A two-degrees-of-freedom gyro with a provision for maintaining its spin axis approximately horizontal.

12725      simple pendulum      Law      Mechanical

A device consisting of a small, massive body suspended by an inextensible object of negligible mass from a fixed

horizontal axis about which the body and suspension are free to rotate.

1273      torsional pendulum      Law      Mechanical

A device consisting of a disk or other body of large moment of inertia mounted on one end of a torsionally flexible elastic rod whose other end is held fixed; if the disk is twisted and released, it will undergo simple harmonic motion, provided the torque in the rod is proportional to the angle of twist.

1226      axial modulus      Law      Mechanical

The ratio of a simple tension stress applied to a material to the resulting strain parallel to the tension when the sides of the sample are restricted so that there is no lateral deformation. Also known as modulus of simple longitudinal extension.

14085      unit strain      Law      Mechanical

1. For tensile strain, the elongation per unit length. 2. For compressive strain, the shortening per unit length. 3. For shear strain, the change in angle between two lines originally perpendicular to each other.

4326      Lagrange bracket      Law      Mechanical

Given two functions of coordinates and momenta in a system, their Lagrange bracket is an expression measuring how coordinates and momenta change jointly with respect to the two functions.

414      fracture wear      Law      Mechanical

The wear on individual abrasive grains on the surface of a grinding wheel caused by fracture.

14203      momentum      Law      Mechanical

1. Also known as linear momentum; vector momentum. 2. For a single nonrelativistic particle, the product of the mass and the velocity of a particle. 3. For a single relativistic particle,  $mv/(1 - v^2/c^2)^{1/2}$ , where  $m$  is the rest-mass,  $v$  the velocity, and  $c$  the speed of 361 momentum conservation light. 4. For a system of particles, the vector sum of the momenta (as in the first or second definition) of the particles.

13086      moving constraint      Law      Mechanical

A constraint that changes with time, as in the case of a system on a moving platform.

4282      orthotropic      Law      Mechanical

Having elastic properties such as those of timber, that is, with considerable variations of strength in two or more directions perpendicular to one another.

14086      torque      Law      Mechanical

1. For a single force, the cross product of a vector from some reference point to the point of application of the force with the force itself. Also known as moment of force; rotation moment. 2. For several forces, the vector sum of the torques

(first definition) associated with each of the forces.

1235      deceleration      Law      Mechanical

The rate of decrease of speed of a motion.

1285      plasticity      Law      Mechanical

The property of a solid body whereby it undergoes a permanent change in shape or size when subjected to a stress exceeding a particular value, called the yield value.

1247      centripetal force      Law      Mechanical

The radial force required to keep a particle or object moving in a circular path, which can be shown to be directed toward the center of the circle.

14054      circular motion      Law      Mechanical

1. Motion of a particle in a circular path. 2. Motion of a rigid body in which all its particles move in circles about a common axis, fixed with respect to the body, with a common angular velocity.

1250      moisture content      Law      Mechanical

The quantity of water in a mass of soil, sewage, sludge, or screenings; expressed in percentage by weight of water in the mass.

4364      Coulomb friction      Law      Mechanical

Friction occurring between dry surfaces.

13233      inelastic collision      Law      Mechanical

A collision in which the total kinetic energy of the colliding particles is not the same after the collision as before it.

48      steady-state vibration      Law      Mechanical

Vibration in which the velocity of each particle in the system is a continuous periodic quantity.

336      back pressure      Law      Mechanical

Pressure due to a force that is operating in a direction opposite to that being considered, such as that of a fluid flow.

3395      center of oscillation      Law      Mechanical

Point in a physical pendulum, on the line through the point of suspension and the center of mass, which moves as if all the mass of the pendulum were concentrated there.

13234      elastic collision      Law      Mechanical

A collision in which the sum of the kinetic energies of translation of the participating systems is the same after the collision as before.

4213      Maxwell's theorem      Law      Mechanical

If a load applied at one point A of an elastic structure results in a given deflection at another point B, then the same load applied at B will result in the same deflection at A.

4212      center of percussion      Law      Mechanical

If a rigid body, free to move in a plane, is struck a blow at a point O, and the line of force is perpendicular to the line from O to the center of mass, then the initial motion of the body is a rotation about the center of percussion relative to O; it can be shown to coincide with the center of oscillation relative to O.

421      conjugate momentum      Law      Mechanical

If  $q_j (j = 1, 2, \dots)$  are generalized coordinates of a classical dynamical system, and  $L$  is its Lagrangian, the momentum conjugate to  $q_j$  is  $p_j = dL/dq_j$ . Also known as canonical momentum; generalized momentum.

4205      neutral axis      Law      Mechanical

In a beam bent downward, the line of zero stress below which all fibers are in tension and above which they are in compression. neutral fiber

3407      plasticoviscosity      Law      Mechanical

Plasticity in which the rate of deformation of a body subjected to stresses greater than the yield stress is a linear function of the stress.

4125      mean normal stress      Law      Mechanical

In a system stressed multiaxially, the algebraic mean of the three principal stresses.

47      normal mode of vibration      Law      Mechanical

Vibration of a coupled system in which the value of one of the normal coordinates oscillates and the values of all the other coordinates remain stationary.

1248      centripetal acceleration      Law      Mechanical

The radial component of the acceleration of a particle or object moving around a circle, which can be shown to be directed toward the center of the circle. Also known as radial acceleration.

1224      stiffness      Law      Mechanical

The ratio of a steady force acting on a deformable elastic medium to the resulting displacement.

3096	roll	Law	Mechanical
Rotational or oscillatory movement of an aircraft or similar body about a longitudinal axis through the body; it is called roll for any degree of such rotation.			
12302	Strouhal number	Law	Mechanical
A dimensionless number used in studying the vibrations of a body past which a fluid is flowing; it is equal to a characteristic dimension of the body times the frequency of vibrations divided by the fluid velocity relative to the body; for a taut wire perpendicular to the fluid flow, with the characteristic dimension taken as the diameter of the wire, it has a value between 0.185 and 0.2 Symbolized Sr. Also known as reduced frequency.			
3305	compression strength	Law	Mechanical
Property of a material to resist rupture under compression.			
1194	fatigue ratio	Law	Mechanical
The ratio of the fatigue limit or fatigue strength to the static tensile strength. Also known as endurance ratio.			
1195	elastic ratio	Law	Mechanical
The ratio of the elastic limit to the ultimate strength of a solid.			
4438	apparent weight	Law	Mechanical
For a body immersed in a fluid (such as air), the resultant of the gravitational force and the buoyant force of the fluid acting on the body; equal in magnitude to the true weight minus the weight of the displaced fluid.			
4436	Lagrangian density	Law	Mechanical
For a dynamical system of fields or continuous media, a function of the fields, of their time and space derivatives, and the coordinates and time, whose integral over space is the Lagrangian.			
1199	bulk modulus of elasticity	Law	Mechanical
The ratio of the compressive or tensile force applied to a substance per unit surface area to the change in volume of the substance per unit volume. Also known as bulk modulus; compression modulus; hydrostatic modulus; modulus of compression; modulus of volume elasticity.			
407	tare	Law	Mechanical
The weight of an empty vehicle or container; subtracted from gross weight to ascertain net weight.			
120	bulk strain	Law	Mechanical
The ratio of the change in the volume of a body that occurs when the body is placed under pressure, to the original volume of the body.			

4428	Kennedy and Pancu circle	Law	Mechanical
For a harmonic oscillator subject to hysteretic damping and subjected to a sinusoidally varying force, a plot of the in-phase and quadrature components of the displacement of the oscillator as the frequency of the applied vibration			
3307	rotational stability	Law	Mechanical
Property of a body for which a small angular displacement sets up a restoring torque that tends to return the body to its original position.			
436	stiction	Law	Mechanical
Friction that tends to prevent relative motion between two movable parts at their null position.			
1217	stress ratio	Law	Mechanical
The ratio of minimum to maximum stress in fatigue testing, considering tensile stresses as positive and compressive stresses as negative.			
4362	phonon friction	Law	Mechanical
Friction that arises when atoms close to a surface are set into motion by the sliding action of atoms in an opposing surface, and the mechanical energy needed to slide one surface over the other is thereby converted to the energy of atomic lattice vibrations (phonons) and is eventually transformed into heat.			
4414	axial moment of inertia	Law	Mechanical
For any object rotating about an axis, the sum of its component masses times the square of the distance to the axis.			
41	towed load	Law	Mechanical
The weight of a carriage, trailer, or other equipment towed by a prime mover.			
4412	Poisson bracket	Law	Mechanical
For any two dynamical variables, X and Y, the sum, over all degrees of freedom of the system, of $(dX/dq)(dY/dp) - (dX/dp)(dY/dq)$ , where q is a generalized coordinate and p is the corresponding generalized momentum.			
1225	Young's modulus	Law	Mechanical
The ratio of a simple tension stress applied to a material to the resulting strain parallel to the tension. Also known as modulus of elasticity y parameter			
4405	buckling stress	Law	Mechanical
Force exerted by the crippling load.			
4402	resonance vibration	Law	Mechanical



Forced vibration in which the frequency of the disturbing force is very close to the natural frequency of the system, so that the amplitude of vibration is very large.

440 cold stress Law Mechanical

Forces tending to deform steel, cement, and other materials, resulting from low temperatures.

4400 coplanar forces Law Mechanical

Forces that act in a single plane; thus the forces are parallel to the plane and their points of application are in the plane.

12307 Deborah number Law Mechanical

A dimensionless number used in rheology, equal to the relaxation time for some process divided by the time it is observed. Symbolized D.

4384 Kolosov-Muskhelishvili formulas Law Mechanical

Formulas which express plane strain and plane stress in terms of two holomorphic functions of the complex variable  $z = x + iy$ , where  $x$  and  $y$  are plane coordinates.

4366 boundary friction Law Mechanical

Friction between surfaces that are neither completely dry nor completely separated by a lubricant.

4365 stick-slip friction Law Mechanical

Friction between two surfaces that are alternately at rest and in motion with respect to each other.

14094 equation of motion Law Mechanical

1. Equation which specifies the coordinates of particles as functions of time. 2. A differential equation, or one of several such equations, from which the coordinates of particles as functions of time can be obtained if the initial positions and velocities of the particles are known.

4425 polhode Law Mechanical

For a rotating rigid body not subject to external torque, the closed curve traced out on the inertia ellipsoid by the intersection with this ellipsoid of an axis parallel to the angular velocity vector and through the center.

3483 elastic vibration Law Mechanical

Oscillatory motion of a solid body which is sustained by elastic forces and the inertia of the body.

4079 limit velocity Law Mechanical

In armor and projectile testing, the lowest possible velocity at which any one of the complete penetrations is obtained; since the limit velocity is difficult to obtain, a more easily obtainable value, designated as the ballistic limit, is usually

3727	melt fracture	Law	Mechanical
Melt flow instability through a die during plastics molding, leading to helicular, rippled surface irregularities on the finished product.			
13235	plastic collision	Law	Mechanical
A collision in which one or both of the colliding bodies suffers plastic deformation and mechanical energy is dissipated.			
3464	standard trajectory	Law	Mechanical
Path through the air that it is calculated a projectile will follow under given conditions of weather, position, and material, including the particular fuse, projectile, and propelling charge that are used; firing tables are based on standard			
3686	curvilinear motion	Law	Mechanical
Motion along a curved path.			
3685	radial motion	Law	Mechanical
Motion in which a body moves along a line connecting it with an observer or reference point; for example, the motion of stars which move toward or away from the earth without a change in apparent position.			
3684	rolling	Law	Mechanical
Motion of a body across a surface combined with rotational motion of the body so that the point on the body in contact with the surface is instantaneously at rest. rolling contact			
3683	flat spin	Law	Mechanical
Motion of a projectile with a slow spin and a very large angle of yaw, happening most frequently in fin-stabilized projectiles with some spin-producing moment, when the period of revolution of the projectile coincides with the period of its oscillation; sometimes observed in bombs and in unstable spinning projectiles.			
3678	ballistic entry	Law	Mechanical
Movement of a ballistic body from without to within a planetary atmosphere. ballistic instrument			
3668	low velocity	Law	Mechanical
Muzzle velocity of an artillery projectile of 2499 feet (762 meters) per second or less.			
3663	Newton's equations of motion	Law	Mechanical
Newton's laws of motion expressed in the form of mathematical equations.			
3652	inelastic	Law	Mechanical
Not capable of sustaining a deformation without permanent change in size or shape.			

3730	bridge vibration	Law	Mechanical
Mechanical vibration of a bridge superstructure due to natural and human-produced excitations.			
3636	topple axis	Law	Mechanical
Of a gyroscope, the horizontal axis, perpendicular to the horizontal spin axis, around which topple occurs. Also known as tumble axis.			
3732	thermal stress	Law	Mechanical
Mechanical stress induced in a body when some or all of its parts are not free to expand or contract in response to changes in temperature.			
3632	angle of orientation	Law	Mechanical
Of a projectile in flight, the angle between the plane determined by the axis of the projectile and the tangent to the trajectory (direction of motion), and the vertical plane including the tangent to the trajectory.			
22	air resistance	Law	Mechanical
Wind drag giving rise to forces and wear on buildings and other structures.			
1279	isochronism	Law	Mechanical
The property of having a uniform rate of operation or periodicity, for example, of a pendulum or watch balance.			
3612	equipollent	Law	Mechanical
Of two systems of forces, having the same vector sum and the same total torque about an arbitrary point.			
3589	volumetric strain	Law	Mechanical
One measure of deformation; the change of volume per unit of volume.			
3505	nanogram	Law	Mechanical
One-billionth ( $10^{-9}$ ) of a gram. Abbreviated ng.			
3568	Newtonian reference frame	Law	Mechanical
One of a set of reference frames with constant relative velocity and within which Newton's laws hold; the frames have a common time, and coordinates are related by the Galilean transformation rule.			
424	specific volume	Law	Mechanical
The volume of a substance per unit mass; it is the reciprocal of the density. Abbreviated sp vol.			
3566	Euler-Rodrigues parameter	Law	Mechanical

One of four numbers which may be used to specify the orientation of a rigid body; they are components of a quaternion.

1284      compressibility      Law      Mechanical

The property of a substance capable of being reduced in volume by application of pressure; quantitatively, the reciprocal of the bulk modulus.

3542      overtone      Law      Mechanical

One of the normal modes of vibration of a vibrating system whose frequency is greater than that of the fundamental mode.

3539      dynamical variable      Law      Mechanical

One of the quantities used to describe a system in classical mechanics, such as the coordinates of a particle, the components of its velocity, the momentum, or functions of these quantities.

3533      principal axis of strain      Law      Mechanical

One of the three axes of a body that were mutually perpendicular before deformation. Also known as strain axis.

3479      spin compensation      Law      Mechanical

Overcoming or reducing the effect of projectile rotation in decreasing the penetrating capacity of the jet in shaped-charge ammunition.

1263      flexibility      Law      Mechanical

The quality or state of being able to be flexed or bent repeatedly.

4490      fibrous fracture      Law      Mechanical

Failure of a material resulting from a ductile crack; broken surfaces are dull and silky. Also known as ductile fracture.

fiducial temperature

4060      damping coefficient      Law      Mechanical

In damped harmonic motion, the ratio of the frictional resistive force to the speed. Also known as damping coefficient; damping constant; mechanical resistance.

4054      negative g      Law      Mechanical

In designating the direction of acceleration on a body, the opposite of positive g; for example, the effect of flying an outside loop in the upright seated position.

4044      reciprocal strain ellipsoid      Law      Mechanical

In elastic theory, an ellipsoid of certain shape and orientation which under homogeneous strain is transformed into a set of orthogonal diameters of the sphere.

4033	topple	Law	Mechanical
In gyroscopes for marine or aeronautical use, the condition of a sudden upset gyroscope or a gyroscope platform evidenced by a sudden and rapid precession of the spin axis due to large torque disturbances such as the spin axis striking the mechanical stops. Also known as tumble.			
4022	initial free space	Law	Mechanical
In interior ballistics, the portion of the effective chamber capacity not displaced by propellant.			
402	initial shot start pressure	Law	Mechanical
In interior ballistics, the pressure required to start the motion of the projectile from its initial loaded position; in fixed ammunition, it includes pressure required to separate projectile and cartridge case and to start engraving the rotating band.			
399	isostatics	Law	Mechanical
In photoelasticity studies of stress analyses, those curves, the tangents to which represent the progressive change in principal- plane directions. Also known as stress trajectories.			
12353	bending-moment diagram	Law	Mechanical
A diagram showing the bending moment at every point along the length of a beam plotted as an ordinate.			
3957	side direction	Law	Mechanical
In stress analysis, the direction perpendicular to the plane of symmetry of an object.			
3949	Kirkwood-Brinkely's theory	Law	Mechanical
In terminal ballistics, a theory formulating the scaling laws from which the effect of blast at high altitudes may be inferred, based upon observed results at ground level.			
3935	Delaunay orbit element	Law	Mechanical
In the n-body 150 De Nora cell problem, certain functions of variable elements of an ellipse with a fixed focus along which one of the bodies travels; these functions have rates of change satisfying simple equations.			
3729	classical mechanics	Law	Mechanical
Mechanics based on Newton's laws of motion.			
1262	rigidity	Law	Mechanical
The quality or state of resisting change in form.			
4068	causality	Law	Mechanical
In classical mechanics, the principle that the specification of the dynamical variables of a system at a given time, and of the			

external forces acting on the system, completely determines the values of dynamical variables at later times. Also known as determinism.

390      gravitational instability      Law      Mechanical

Instability of a dynamic system in which gravity is the restoring force.

3900      melt instability      Law      Mechanical

Instability of the plastic melt flow through a die.

14107      internal friction      Law      Mechanical

1. Conversion of mechanical strain energy to heat within a material subjected to fluctuating stress. 2. In a powder, the friction that is developed by the particles sliding over each other; it is greater than the friction of the mass of solid that comprises the individual particles.

12356      shear diagram      Law      Mechanical

A diagram in which the shear at every point along a beam is plotted as an ordinate.

3428      elastic hysteresis      Law      Mechanical

Phenomenon exhibited by some solids in which the deformation of the solid depends not only on the stress applied to the solid but also on the previous history of this stress; analogous to magnetic hysteresis, with magnetic field strength and magnetic induction replaced by stress and strain respectively.

3819      bearing pressure      Law      Mechanical

Load on a bearing surface divided by its area. Also known as bearing stress.

3818      bearing capacity      Law      Mechanical

Load per unit area which can be safely supported by the ground. bearing circle

3814      line of thrust      Law      Mechanical

Locus of the points through which the resultant forces pass in an arch or retaining wall.

1420      Coriolis acceleration      Law      Mechanical

1. An acceleration which, when added to the acceleration of an object relative to a rotating coordinate system and to its centripetal acceleration, gives the acceleration of the object relative to a fixed coordinate system. 2. A vector which is equal in magnitude and opposite in direction to that of the first definition.

14144      virtual displacement      Law      Mechanical

1. Any change in the positions of the particles forming a mechanical system. 2. An infinitesimal change in the positions of

the particles forming a mechanical system, which is consistent with the geometrical constraints on the system.

3783      antifriction      Law      Mechanical

Making friction smaller in magnitude.

3457      permanent set      Law      Mechanical

Permanent plastic deformation of a structure or a test piece after removal of the applied load. Also known as set.

3737      friction loss      Law      Mechanical

Mechanical energy lost because of mechanical friction between moving parts of a machine.

3932      helical angle      Law      Mechanical

In the study of torsion, the angular displacement of a longitudinal element, originally straight on the surface of an untwisted bar, which becomes helical after twisting. helical conveyor

4947      creep buckling      Law      Mechanical

Buckling that may occur when a compressive load is maintained on a member over a long period, leading to creep which eventually reduces the member's bending stiffness.

5026      revolution per second      Law      Mechanical

A unit of angular velocity equal to the uniform angular velocity of a body which rotates through an angle of  $360^\circ$  ( $2\pi$  radians), so that every point in the body returns to its original position, in 1 second. Abbreviated rps.

5024      cubicfoot per minute      Law      Mechanical

A unit of volume flow rate, equal to a uniform flow of 1 cubic foot in 1 minute; equal to 1/60 cusec. Abbreviated cfm.

5012      standard gravity      Law      Mechanical

A value of the acceleration of gravity equal to 9.80665 meters per second per second.

1348      propulsion      Law      Mechanical

The process of causing a body to move by exerting a force against it. propulsion system

12887      release adiabat      Law      Mechanical

A curve or locus of points which defines the succession of states through which a mass that has been shocked to a high-pressure state passes while monotonically returning to zero pressure.

5006      free vector      Law      Mechanical

A vector whose direction in space is prescribed but whose point of application and line of application are not prescribed.

499	conical pendulum	Law	Mechanical
A weight suspended from a cord or light rod and made to rotate in a horizontal circle about a vertical axis with a constant angular velocity.			
3095	sliding friction	Law	Mechanical
Rubbing of bodies in sliding contact.			
12975	rotating coordinate system	Law	Mechanical
A coordinate system whose axes as seen in an inertial coordinate system are rotating.			
4974	combined stresses	Law	Mechanical
Bending or twisting stresses in a structural member combined with direct tension or compression.			
13876	kilogram	Law	Mechanical
1. The unit of mass in the meter-kilogram-second system, equal to the mass of the international prototype kilogram stored at Sevres, France. Abbreviated kg. 2. See kilogram force.			
3120	elastic deformation	Law	Mechanical
Reversible alteration of the form or dimensions of a solid body under stress or strain.			
4479	Chladni's figures	Law	Mechanical
Figures produced by sprinkling sand or similar material on a horizontal plate and then vibrating the plate while holding it rigid at its center or along its periphery; indicate the nodal lines of vibration.			
495	frangible	Law	Mechanical
Breakable, fragile, or brittle.			
13975	Lagrangian	Law	Mechanical
1. The difference between the kinetic energy and the potential energy of a system of particles, expressed as a function of generalized coordinates and velocities from which Lagrange's equations can be derived.			
3124	elastic flow	Law	Mechanical
Return of a material to its original shape following deformation.			
4935	elastic potential energy	Law	Mechanical
Capacity that a body has to do work by virtue of its deformation.			
1398	flexure	Law	Mechanical



1. The deformation of any beam subjected to a load. 2. Any deformation of an elastic body in which the points originally lying on any straight line are displaced to form a plane curve.

4915      strain      Law      Mechanical

Change in length of an object in some direction per unit undistorted length in some direction, not necessarily the same; the nine possible strains form a second-rank tensor.

4914      angular speed      Law      Mechanical

Change of direction per unit time, as of a target on a radar screen, without regard to the direction of the rotation axis; in other words, the magnitude of the angular velocity vector. Also known as angular rate.

490      uniform circular motion      Law      Mechanical

Circular motion in which the angular velocity remains constant. uniform click track

14212      meter-kilogram      Law      Mechanical

1. A unit of energy or work in a meter-kilogram-second gravitational system, equal to the work done by a kilogramforce when the point at which the force is applied is displaced 1 meter in the direction of the force; equal to 9.80665 joules. Abbreviated m-kgf.

1421      foot-poundal      Law      Mechanical

1. A unit of energy or work in the English absolute system, equal to the work done by a force of magnitude 1 poundal when the point at which the force is applied is displaced 1 foot in the direction of the force; equal to approximately 0.04214011 joule. Abbreviated ft-pdl. 2. A unit of torque in the English absolute system, equal to the torque produced by a force of magnitude 1 poundal acting at a perpendicular distance of 1 foot from the axis of rotation.

3133      trigger pull trigger pull      Law      Mechanical

Resistance offered by the trigger of a rifle or other weapon; force which must be exerted to pull the trigger trigonometric leveling

12883      deformation curve      Law      Mechanical

A curve showing the relationship between the stress or load on a structure, structural member, or a specimen and the strain or deformation that results. Also known as stress-strain curve.

4869      deadbeat      Law      Mechanical

Coming to rest without vibration or oscillation, as when the pointer of a meter moves to a new position without

4862      ballistic table      Law      Mechanical

Compilation of ballistic data from which trajectory elements such as angle of fall, range to summit, time of flight, and

ordinate at anytime, can be obtained.

4953	ballistics	Law	Mechanical
------	------------	-----	------------

Branch of applied mechanics which deals with the motion and behavior characteristics of missiles, that is, projectiles, bombs, rockets, guided missiles, and so forth, and of accompanying phenomena.

5278	equatorial plane	Law	Mechanical
------	------------------	-----	------------

Aplane perpendicular to the axis of rotation of a rotating body and equidistant from the intersections of this axis with the body's surface, provided that the body is symmetric about the axis of rotation and is symmetric under reflection through this plane.

5403	kinematically admissible motion	Law	Mechanical
------	---------------------------------	-----	------------

Any motion of a mechanical system which is geometrically compatible with the constraints.

5402	periodic motion	Law	Mechanical
------	-----------------	-----	------------

Any motion that repeats itself identically at regular intervals.

12149	constant of motion	Law	Mechanical
-------	--------------------	-----	------------

A dynamical variable of a system which remains constant in time.

1148	Poisson ratio	Law	Mechanical
------	---------------	-----	------------

The ratio of the transverse contracting strain to the elongation strain when a rod is stretched by forces which are applied at its ends and which are parallel to the rod's axis.

2892	moment	Law	Mechanical
------	--------	-----	------------

Static moment of some quantity, except in the term "moment of inertia." momental ellipsoid

2894	elastoplasticity	Law	Mechanical
------	------------------	-----	------------

State of a substance subjected to a stress greater than its elastic limit but not so great as to cause it to rupture, in which it exhibits both elastic and plastic properties. elastoresistance

5353	stiffness constant	Law	Mechanical
------	--------------------	-----	------------

Any one of the coefficients of the relations in the generalized Hooke's law used to express stress components as linear functions of the strain components.

12150	integrable system	Law	Mechanical
-------	-------------------	-----	------------

A dynamical system whose motion is governed by an integrable differential equation.

1149	torsional modulus	Law	Mechanical
------	-------------------	-----	------------

The ratio of the torsional rigidity of a bar to its length. Also known as modulus of torsion.

1150      torsional rigidity      Law      Mechanical

The ratio of the torque applied about the centroidal axis of a bar at one end of the bar to the resulting torsional angle, when the other end is held fixed.

2915      remaining velocity      Law      Mechanical

Speed of a projectile at any point along its path of fire.

2938      radial wave equation      Law      Mechanical

Solutions to wave equations with spherical symmetry can be found by separation of variables; the ordinary differential equation for the radial part of the wave function is called the radial wave equation.

5054      flat trajectory      Law      Mechanical

A trajectory which is relatively flat, that is, described by a projectile of relatively high velocity.

5298      pure shear      Law      Mechanical

A particular example of irrotational strain or flattening in which a body is elongated in one direction and shortened at right angles to it as a consequence of differential displacements on two sets of intersecting planes.

5055      skip trajectory      Law      Mechanical

A trajectory made up of ballistic phases alternating with skipping phases; one of the basic trajectories for the unpowered portion of the flight of a reentry vehicle or spacecraft reentering earth's atmosphere.

5249      base pressure      Law      Mechanical

A pressure used as a reference base, for example, atmospheric pressure.

518      pivot      Law      Mechanical

A short, pointed shaft forming the center and fulcrum on which something turns, balances, or oscillates.

5177      equal-arm balance      Law      Mechanical

A simple balance in which the distances from the point of support of the balance-arm beam to the two pans at the end of the beam are equal.

5176      equilibrant      Law      Mechanical

A single force which cancels the vector sum of a given system of forces acting on a rigid body and whose torque cancels the sum of the torques of the system.

5146      heterogeneous strain      Law      Mechanical

A strain in which the components of the displacement of a point in the body cannot be expressed as linear functions of the original coordinates.

513      nonholonomic system      Law      Mechanical

A system of particles which is subjected to constraints of such a nature that the system cannot be described by independent coordinates; examples are a rolling hoop, or an ice skate which must point along its path.

5126      circular velocity      Law      Mechanical

At any specific distance from the primary, the orbital velocity required to maintain a constant-radius orbit. circulating fluid

1154      flexural rigidity      Law      Mechanical

The ratio of the sideward force applied to one end of a beam to the resulting displacement of this end, when the other end is clamped.

5089      parallel axis theorem      Law      Mechanical

A theorem which states that the moment of inertia of a body about any given axis is the moment of inertia about a parallel axis through the center of mass, plus the moment of inertia that the body would have about the given axis if all the mass of the body were located at the center of mass. Also known as Steiner's theorem.

5088      perpendicular axis theorem      Law      Mechanical

A theorem which states that the sum of the moments of inertia of a plane lamina about any two perpendicular axes in the plane of the lamina is equal to the moment of inertia about an axis through their intersection perpendicular to the lamina.

5087      least-work theory      Law      Mechanical

A theory of statically indeterminate structures based on the fact that when a stress is applied to such a structure the individual parts of it are deflected so that the energy stored in the elastic members is minimized.

2988      coaxial      Law      Mechanical

Sharing the same axes.

4838      equilibrium      Law      Mechanical

Condition in which a particle, or all the constituent particles of a body, are at rest or in unaccelerated motion in an inertial reference frame. Also known as static equilibrium.

1153      plate modulus      Law      Mechanical

The ratio of the stress component  $T_{xx}$  in an isotropic, elastic body obeying a generalized Hooke's law to the corresponding strain component  $S_{xx}$ , when the strain components  $S_{yy}$  and  $S_{zz}$  are 0; the sum of the Poisson ratio and twice the rigidity modulus.

1187	coefficient of friction	Law	Mechanical
The ratio of the frictional force between two bodies in contact, parallel to the surface of contact, to the force, normal to the surface of contact, with which the bodies press against each other. Also known as friction coefficient.			
3185	embrittlement	Law	Mechanical
Reduction or loss of ductility or toughness in a metal or plastic with little change in other mechanical properties. emergency brake			
396	elastic strain energy	Law	Mechanical
The work done in deforming a solid within its elastic limit.			
14023	relaxation	Law	Mechanical
1. Relief of stress in a strained material due to creep. 2. The lessening of elastic resistance in an elastic medium under an applied stress resulting in permanent deformation.			
4633	canting	Law	Mechanical
Displacing the free end of a beam which is fixed at one end by subjecting it to a sideways force which is just short of that required to cause fracture.			
4632	plastic	Law	Mechanical
Displaying, or associated with, plasticity.			
4630	range deviation	Law	Mechanical
Distance by which a projectile strikes beyond, or short of, the target; the distance as measured along the gun-target line or along a line parallel to the gun-target line.			
4628	point-blank range	Law	Mechanical
Distance to a target that is so short that the trajectory of a bullet or projectile is practically a straight, rather than a curved, line.			
4579	plane of maximum shear stress	Law	Mechanical
Either of two planes that lie on opposite sides of and at angles of $45^\circ$ to the maximum principal stress axis and that are parallel to the intermediate principal stress axis.			
4577	time of flight	Law	Mechanical
Elapsed time in seconds from the instant a projectile or other missile leaves a gun or launcher until the instant it strikes or bursts.			

14024	Roche lobes	Law	Mechanical
1. Regions of space surrounding two massive bodies revolving around each other under their mutual gravitational attraction, such that the gravitational attraction of each body dominates the lobe surrounding it.			
55	plane of departure	Law	Mechanical
Vertical plane containing the path of a projectile as it leaves the muzzle of the gun.			
14037	centrobaric	Law	Mechanical
1. Pertaining to the center of gravity, or to some method of locating it. 2. Possessing a center of gravity.			
56	plane of fire	Law	Mechanical
Vertical plane containing the gun and the target, or containing a line of site.			
1186	coefficient of rolling friction	Law	Mechanical
The ratio of the frictional force, parallel to the surface of contact, opposing the motion of a body rolling over another, to the force, normal to the surface of contact, with which the bodies press against coefficient of sliding friction			
4647	maximum ordinate	Law	Mechanical
Difference in altitude between the origin and highest point of the trajectory of a projectile.			
4532	Saint Venant's compatibility equations	Law	Mechanical
Equations for the components $e_{ij}$ of the strain tensor that follow from their integrability, namely, $(e_{ij})_{kl} + (e_{kl})_{ij} - (e_{ik})_{jl} - (e_{jl})_{ik} = 0$ , where $i, j, k$ , and $l$ can take on any of the values $x, y$ , and $z$ , and subscripts outside the parentheses indicate partial differentiation.			
453	Lagrange's equations	Law	Mechanical
Equations of motion of a mechanical system for which a classical (non-quantum-mechanical) description is suitable, and which relate the kinetic energy of the system to the generalized coordinates, the generalized forces, and the time. Also known as Lagrangian equations of motion.			
1295	centrifugal moment	Law	Mechanical
The product of the magnitude of centrifugal force acting on a body and the distance to the center of rotation. centrifugal pump			
403	specific weight	Law	Mechanical
The weight per unit volume of a substance.			
3300	firmoviscosity	Law	Mechanical

Property of a substance in which the stress is equal to the sum of a term proportional to the substance's deformation, and a term proportional to its rate of deformation.

3302      underspin      Law      Mechanical

Property of a projectile having insufficient rate of spin to give proper stabilization. underwater sound projector

4509      shimmy      Law      Mechanical

Excessive vibration of the front wheels of a wheeled vehicle causing a jerking motion of the steering wheel.

119      force constant      Law      Mechanical

The ratio of the force to the deformation of a system whose deformation is proportional to the applied force.

3304      viscoelasticity      Law      Mechanical

Property of a material which is viscous but which also exhibits certain elastic properties such as the ability to store energy of deformation, and in which the application of a stress gives rise to a strain that approaches its equilibrium value slowly.

1193      stiffness coefficient      Law      Mechanical

The ratio of the force acting on a linear mechanical system, such as a spring, to its displacement from equilibrium.

450      Euler equation      Law      Mechanical

Expression for the energy removed from a gas stream by a rotating blade system (as a gas turbine), independent of the blade system (as a radial- or axial-flow system).

4500      length      Law      Mechanical

Extension in space.

4493      elastic failure      Law      Mechanical

Failure of a body to recover its original size and shape after a stress is removed.

1185      coefficient of kinetic friction      Law      Mechanical

The ratio of the frictional force, parallel to the surface of contact, that opposes the motion of a body which is sliding or rolling over another, to the force, normal to the surface of contact, with which the bodies press against each other.

4740      wind deflection      Law      Mechanical

Deflection caused by the influence of wind on the course of a projectile in flight.

2879      creep recovery      Law      Mechanical

Strain developed in a period of time after release of load in a creep test.

4834	ballistic conditions	Law	Mechanical
Conditions which affect the motion of a projectile in the bore and through the atmosphere, including muzzle velocity, weight of projectile, size and shape of projectile, rotation of the earth, density of the air, temperature or elasticity of the air, and the wind.			
13986	angular momentum	Law	Mechanical
1. The cross product of a vector from a specified reference point to a particle, with the particle's linear momentum.			
14210	mil	Law	Mechanical
1. A unit of length, equal to 0.001 inch, or to $2.54 \times 10^{-5}$ meter. Also known as milli-inch; thou. 2. See milliliter.			
1399	normal acceleration	Law	Mechanical
1. The component of the linear acceleration of an aircraft or missile along its normal, or Z, axis. 2. The usual or typical acceleration.			
1172	section modulus	Law	Mechanical
The ratio of the moment of inertia of the cross section of a beam undergoing flexure to the greatest distance of an element of the beam from the neutral axis. sector			
4775	thermal stress cracking	Law	Mechanical
Crazing or cracking of materials (plastics or metals) by overexposure to elevated temperatures and sudden temperature changes or large temperature differentials.			
4773	cold flow	Law	Mechanical
Creep in polymer plastics.			
4772	dynamic creep	Law	Mechanical
Creep resulting from fluctuations in a load or temperature.			
3225	slope of fall	Law	Mechanical
Ratio between the drop of a projectile and its horizontal movement; tangent of the angle of fall.			
4762	pressure-travel curve	Law	Mechanical
Curve showing pressure plotted against the travel of the projectile within the bore of the weapon.			
14209	metric centner	Law	Mechanical
1. A unit of mass equal to 50 kilograms. 2. A unit of mass equal to 100 kilograms. Also known as quintal.			
395	virtual work	Law	Mechanical



The work done on a system during any displacement which is consistent with the constraints on the system.

475      hysteresis damping      Law      Mechanical

Damping of a vibration due to energy lost through mechanical hysteresis.

12859      formed cutter      Law      Mechanical

A cutting tool shaped to make surfaces with irregular geometry. Also known as form cutter.

4739      Hookean deformation      Law      Mechanical

Deformation of a substance which is proportional to the force applied to it.

4736      sq See square. square      Law      Mechanical

Denotes a unit of area; if  $x$  is a unit of length, a square  $x$  is the area of a square whose sides have a length of  $1x$ ; for example, a square meter, or a meter squared, is the area of 524 stability matrix a square whose sides have a length of 1 meter.

4734      cubic      Law      Mechanical

Denoting a unit of volume, so that if  $x$  is a unit of length, a cubic  $x$  is the volume of a cube whose sides have length  $1x$ ; for example, a cubic meter, or a meter cubed, is the volume of a cube whose sides have a length of 1 meter. Abbreviated cu.

1173      factor of stress intensity      Law      Mechanical

The ratio of the maximum stress to which a structural member can be subjected, to the maximum stress to which it is likely to be subjected. Also known as factor of safety.

118      modulus of elasticity      Law      Mechanical

The ratio of the increment of some specified form of stress to the increment of some specified form of strain, such as Young's modulus, the bulk modulus, or the shear modulus. Also known as coefficient of elasticity; elasticity modulus; elastic modulus.

14006      mean stress      Law      Mechanical

1. The algebraic mean of 347 mean temperature difference the maximum and minimum values of a periodically varying stress. 2. See octahedral normal stress.

4693      anelasticity      Law      Mechanical

Deviation from a proportional relationship between stress and strain.

12786      plane strain      Law      Mechanical

A deformation of a body in which the displacements of all points in the body are parallel to a given plane, and the values of

14208	ounce	Law	Mechanical
-------	-------	-----	------------

14008	ballistic efficiency	Law	Mechanical
-------	----------------------	-----	------------

3266	incompressibility	Law	Mechanical
------	-------------------	-----	------------

14019	autorotation	Law	Mechanical
-------	--------------	-----	------------

3277	traction	Law	Mechanical
------	----------	-----	------------

4752	hysteretic damping	Law	Mechanical
------	--------------------	-----	------------

1027	primary stress	Law	Mechanical
------	----------------	-----	------------

2016	gravity vector	Law	Mechanical
------	----------------	-----	------------

2017	arc force	Law	Mechanical
------	-----------	-----	------------

2019	tear strength	Law	Mechanical
------	---------------	-----	------------

162

2020	gun reaction	Law	Mechanical
The force exerted on the gun mount by the rearward movement of the gun resulting from the forward motion of the projectile and hot gases. Also known as recoil.			
202	static reaction	Law	Mechanical
The force exerted on a body by other bodies which are keeping it in equilibrium.			
2022	driving resistance	Law	Mechanical
The force exerted by soil on a pile being driven into it.			
2023	normal reaction	Law	Mechanical
The force exerted by a surface on an object in contact with it which prevents the object from passing through the surface; the force is perpendicular to the surface, and is the only force that the surface exerts on the object in the absence of frictional forces.			
2024	stress	Law	Mechanical
The force acting across a unit area in a solid material resisting the separation, compacting, or sliding that tends to be induced by external forces.			
10230	closed pair	Law	Mechanical
A pair of bodies that are subject to constraints which prevent any relative motion between them.			
2036	combined flexure	Law	Mechanical
The flexure of a beam under a combination of transverse and longitudinal loads.			
2057	gravitational field	Law	Mechanical
The field in a region in space in which a test particle would experience a gravitational force; quantitatively, the gravitational force per unit mass on the particle at a particular point.			
2058	inertial force	Law	Mechanical
The fictitious force acting on a body as a result of using a noninertial frame of reference; examples are the centrifugal and Coriolis forces that appear in rotating coordinate systems. Also known as effective force.			
11186	Poinsot's central axis	Law	Mechanical
A line through a rigid body which is parallel to the vector sum $F$ of a system of forces acting on the body, and which is located so that the system of forces is equivalent to the force $F$ applied anywhere along the line, plus a couple whose torque is equal to the component of the total torque $T$ exerted by the system in the direction $F$ Poinsot's method			

8753	stress function	Law	Mechanical
A single function, such as the Airy stress function, or one of two or more functions, such as Maxwell's or Morera's stress functions, that uniquely define the stresses in an elastic body as a function of position.			
8950	resilience	Law	Mechanical
1. Ability of a strained body, by virtue of high yield strength and low elastic modulus, to recover its size and form following deformation. 2. The work done in deforming a body to some predetermined limit, such as its elastic limit or breaking point, divided by the body's volume.			
1674	elastic limit	Law	Mechanical
The maximum stress a solid can sustain without undergoing permanent deformation.			
1408	spherical stress	Law	Mechanical
The portion of the total stress that corresponds to an isotropic hydrostatic pressure; its stress tensor is the unit tensor multiplied by one-third the trace of the total stress tensor.			
2088	angular travel error	Law	Mechanical
The error which is introduced into a predicted angle obtained by multiplying an instantaneous angular velocity by a time of flight.			
1123	angular length	Law	Mechanical
A length expressed in the unit of the length per radian or degree of a specified wave.			
1673	modulus of rupture in bending	Law	Mechanical
The maximum stress per unit area that a specimen can withstand without breaking when it is bent, as calculated from the breaking load under the assumption that the specimen is elastic until rupture takes place.			
1672	modulus of rupture in torsion	Law	Mechanical
The maximum stress per unit area that a specimen can withstand without breaking when its ends are twisted, as calculated from the breaking load under the assumption that the specimen is elastic until rupture takes place.			
1407	deviatoric stress	Law	Mechanical
The portion of the total stress that differs from an isostatic hydrostatic pressure; it is equal to the difference between the total stress and the spherical stress.			
1406	ascending branch	Law	Mechanical
The portion of the trajectory between the origin and the summit on which a projectile climbs and its altitude constantly			

increases.

1400      inch of mercury      Law      Mechanical

The pressure exerted by a 1-inch-high (2.54-centimeter) column of mercury that has a density of 13.5951 grams per cubic centimeter when the acceleration of gravity has the standard value of 9.80665 m/s<sup>2</sup> or approximately 32.17398 ft/s<sup>2</sup> equal to 3386.388640341 pascals; used as a unit in the measurement of atmospheric pressure.

861      elastic body      Law      Mechanical

A solid body for which the additional deformation produced by an increment of stress completely disappears when the increment is removed. Also known as elastic solid.

2106      gravitational potential energy      Law      Mechanical

The energy that a system of particles has by virtue of their positions, equal to the work that must be done against gravitational forces to assemble 252 grease trap the particles from some reference configuration, such as mutually infinite separation. Also known as gravitational energy.

1397      barye      Law      Mechanical

The pressure unit of the centimeter- gram-second system of physical units; equal to 1 dyne per square centimeter (0.001 millibar).

10269      Voigt notation      Law      Mechanical

A notation employed in the theory of elasticity in which elastic constants and elastic moduli are labeled by replacing the pairs of letters xx, yy, zz, yz, zx, and xy by the number 1, 2, 3, 4, 5, and 6 respectively.

11198      axis      Law      Mechanical

A line about which a body rotates.

825      tensile modulus      Law      Mechanical

The tangent or secant modulus of elasticity of a material in tension. tensile specimen See tensile bar.

1684      modulus of resilience      Law      Mechanical

The maximum mechanical energy stored per unit volume of material when it is stressed to its elastic limit.

11188      line of impact      Law      Mechanical

A line tangent to the trajectory of a missile at t h e point of impact.

2003      set forward force      Law      Mechanical

The forward force of inertia which is created by the deceleration of a projectile, missile, or bomb when impact occurs; the

forces are directly proportional to the deceleration and mass of the parts being decelerated.

1677      creep limit      Law      Mechanical

The maximum stress a given material can withstand in a given time without exceeding a specified quantity of creep.

786      ultimate strength      Law      Mechanical

The tensile stress, per unit of the original surface area, at which a body will fracture, or continue to deform under a decreasing load.

143      simultaneity      Law      Mechanical

Two events have simultaneity, relative to an observer, if they take place at the same time according to a clock which is 501 simultaneous motion-cycle chart fixed relative to the observer.

145      orbital plane      Law      Mechanical

The plane which contains the orbit of a body or particle in a central force field; it passes through the center of force.

1434      point of fall      Law      Mechanical

The point in the curved path of a falling projectile that is level with the muzzle of the gun. Also known as level point.

787      proof resilience      Law      Mechanical

The tensile strength necessary to stretch an elastomer from zero elongation to the breaking point, expressed in footpounds per cubic inch of original dimension.

9036      normal coordinates      Law      Mechanical

A set of coordinates for a coupled system such that the equations of motion each involve only one of these coordinates.

9033      Hamilton's equations of motion      Law      Mechanical

A set of first-order, highly symmetrical equations describing the motion of a classical dynamical system, namely  $q_j = 3H/3p_j$ ,  $p_j = -3H/3q_j$ ; here  $q_j$  ( $j = 1, 2, \dots$ ) are generalized coordinates of the system,  $p_j$  is the momentum conjugate to  $q_j$ , and  $H$  is the Hamiltonian. Also known as canonical equations of motion.

8907      hereditary mechanics      Law      Mechanical

A field of mechanics in which quantities, such as stress, depend not only on other quantities, such as strain, at the same instant but also on integrals involving the values of such quantities at previous times.

1676      fatigue strength      Law      Mechanical

The maximum stress a material can endure for a given number of stress cycles without breaking. Also known as endurance strength.

8908	conservative force field	Law	Mechanical
A field of force in which the work done on a particle in moving it from one point to another depends only on the particle's initial and final positions. conservative property			
2008	Lagrange-Hamilton theory	Law	Mechanical
The formalized study of continuous systems in terms of field variables where a Lagrangian density function and Hamiltonian density function are introduced to produce equations of motion.			
9024	compatibility conditions	Law	Mechanical
A set of six differential relations between the strain components of an elastic solid which must be satisfied in order for these components to correspond to a continuous and single-valued displacement of the solid.			
9023	Euler equations of motion	Law	Mechanical
A set of three differential equations expressing relations between the force moments, angular velocities, and angular accelerations of a rotating rigid body.			
902	generalized coordinates	Law	Mechanical
A set of variables used to specify the position and orientation of a system, in principle defined in terms of Cartesian coordinates of the system's particles and of the time in some convenient manner; the number of such coordinates equals the number of degrees of freedom of the system Also known as Lagrangian coordinates.			
2010	adhesive bond	Law	Mechanical
The forces such as dipole bonds which attract adhesives and base materials to each other.			
2012	sthene	Law	Mechanical
The force which, when applied to a body whose mass is 1 metric ton, results in an acceleration of 1 meter per second per second; equal to 1000 newtons. Formerly known as funal.			
2013	curve resistance	Law	Mechanical
The force opposing the motion of a railway train along a track due to track curvature.			
8972	quarter	Law	Mechanical
1. A unit of mass in use in the United States, equal to 1/4 short ton, or 500 pounds, or 226.796185 kilograms. 2. A unit of mass used in troy measure, equal to 1/4 troy hundredweight, or 25 troy pounds, or 9.33104304 kilograms. Abbreviated qtr. 3. A unit of mass used in the United Kingdom, equal to 1/4 hundredweight, or 28 pounds, or 12.70058636 kilograms.			
897	dram	Law	Mechanical

1. A unit of mass, used in the apothecaries' system of mass units, equal to 1/8 apothecaries' ounce or 60 grains or 3.8879346 grams. Also known as apothecaries' dram (dram ap); drachm (British). 2. A unit of mass, formerly used in the United Kingdom, equal to 1/16 ounce (avoirdupois) or approximately 1.77185 grams. Abbreviated dr.

8970      micron      Law      Mechanical

1. A unit of pressure equal to the pressure exerted by a column of mercury 1 micrometer high, having a density of 13.5951 grams per cubic centimeter, under the standard acceleration of gravity; equal to 0.133322387415 pascal; it differs from the millitorr by less than one part in seven million. Also known as micrometer of mercury. 2. See micrometer micro-opto-electro-mechanical system

8969      chaldron      Law      Mechanical

1. A unit of volume in common use in the United Kingdom, equal to 36 bushels, or 288 gallons, or approximately 1.30927 cubic meters. 2. A unit of volume, formerly used for measuring solid substances in the United States, equal to 36 bushels, or approximately 1.26861 cubic meters.

8968      gill      Law      Mechanical

1. A unit of volume used in the United States for the measurement of liquid substances, equal to 1/4 U.S. liquid pint, or to 1.1829411825 X 10<sup>-4</sup> cubic meter. 2. A unit of volume used in the United Kingdom for the measurement of liquid substances, and occasionally of solid substances, equal to 1/4 U.K.

8513      plane stress      Law      Mechanical

A state of stress in which two of the principal stresses are always parallel to a given plane and are constant in the normal direction.

9029      coupled oscillators      Law      Mechanical

A set of particles subject to elastic restoring forces and also to elastic interactions with each other.

1126      Andrade's creep law      Law      Mechanical

A law which states that creep exhibits a transient state in which strain is proportional to the cube root of time and then a steady state in which strain is proportional to time.

2109      barycentric energy      Law      Mechanical

The energy of a system in its center-of-mass frame.

8294      Foucault pendulum      Law      Mechanical

A swinging weight supported by a long wire, so that the wire's upper support restrains the wire only in the vertical direction, and the weight is set swinging with no lateral or circular motion; the plane of the pendulum gradually changes,



demonstrating the rotation of the earth on its axis.

8268      asymmetric top      Law      Mechanical

A system in which all three principal moments of inertia are different.

8263      holonomic system      Law      Mechanical

A system in which the constraints are such that the original coordinates can be expressed in terms of independent coordinates and possibly also the time.

8259      resultant of forces      Law      Mechanical

A system of at most a single force and a single couple whose external effects on a rigid body are identical with the effects of the several actual forces that act on that body.

8249      troy system      Law      Mechanical

A system of mass units used primarily to measure gold and silver; the 582 tube seat ounce is the same as that in the apothecaries' system, being equal to 480 grains or 31.1034768 grams. Abbreviated t. Also known as troy weight.

10406      pitching moment      Law      Mechanical

A moment about a lateral axis of an aircraft, rocket, or airfoil. pitch line See cam profile.

137      double pendulum      Law      Mechanical

Two masses, one suspended from a fixed point by a weightless string or rod of fixed length, and the other similarly suspended from the first; often the system is constrained to remain in a vertical plane.

8235      metric system      Law      Mechanical

A system of units used in scientific work throughout the world and employed in general commercial transactions and engineering applications; its units of length, time, and mass are the meter, second, and kilogram respectively, or decimal multiples and submultiples thereof.

10428      meter-ton-second system      Law      Mechanical

A modification of the meter-kilogram-second system in which the metric ton (1000 kilograms) replaces the kilogram as the unit of mass.

10434      cycloidal pendulum      Law      Mechanical

A modification of a simple pendulum in which a weight is suspended from a cord which is slung between two pieces of metal shaped in the form of cycloids; as the bob swings, the cord wraps and unwraps on the cycloids; the pendulum has a period that is independent of the amplitude of the swing.

13397	mode of vibration	Law	Mechanical
A characteristic manner in which a system which does not dissipate energy and whose motions are restricted by boundary conditions can oscillate, having a characteristic pattern of motion and one of a discrete set of frequencies. Also known as mode of oscillation.			
8328	isostatic surface	Law	Mechanical
A surface in a threedimensional elastic body such that at each point of the surface one of the principal planes of stress at that point is tangent to the surface.			
139	Maupertius' principle	Law	Mechanical
The principle of least action is sufficient to determine the motion of a mechanical system.			
10359	live-end-dead-end room	Law	Mechanical
A moving load or a load of variable force acting upon a structure, in addition to its own weight.			
1622	fracture stress	Law	Mechanical
The minimum tensile fracture test stress that will cause fracture. Also known as fracture strength.			
10514	hectoliter	Law	Mechanical
A metric unit of volume equal to 100 liters or to 0.1 cubic meter. Abbreviated hl.			
10515	decibar	Law	Mechanical
A metric unit of pressure equal to one-tenth bar.			
11262	Hertz's law	Law	Mechanical
A law which gives the radius of contact between a sphere of elastic material and a surface in terms of the sphere's radius, the normal force exerted on the sphere, and Young's modulus for the material of the sphere.			
11263	Bernoulli-Euler law	Law	Mechanical
A law stating that the curvature of a beam is proportional to the bending moment.			
11265	composition-of-velocities law	Law	Mechanical
A law relating the velocities of an object in two references frames which are moving relative to each other with a specified velocity.			
8143	dynamic braking	Law	Mechanical
A technique of electric braking in which the retarding force is supplied by the same machine that originally was the driving motor dynamic check			

11273	pitch axis	Law	Mechanical
A lateral axis through an aircraft, missile, or similar body, about which the body pitches. Also known as pitching axis.			
10516	decimeter	Law	Mechanical
A metric unit of length equal to one-tenth meter.			
222	mistuning	Law	Mechanical
The difference between the square of the natural frequency of vibration of a vibrating system, without the effect of damping, and the square of the frequency of an external, oscillating force.			
745	modulus of decay	Law	Mechanical
The time required for the amplitude of oscillation of an underdamped harmonic oscillator to drop to 1/e of its initial value; the reciprocal of the damping factor. modulus of deformation			
157	cantilever vibration	Law	Mechanical
Transverse oscillatory motion of a body fixed at one end.			
162	damaging stress	Law	Mechanical
The minimum unit stress for a given material and use that will cause damage to the member and make it unfit for its expected length of service.			
8234	liquid measure	Law	Mechanical
A system of units used to measure the volumes of liquid substances in the United States; the units are the fluid dram, fluid ounce, gill, pint, quart, and gallon.			
8420	principal stress	Law	Mechanical
A stress occurring at right angles to a principal plane of stress.			
1994	normal frequencies	Law	Mechanical
The frequencies of the normal modes of vibration of a system. normal impact			
8512	uniaxial stress	Law	Mechanical
A state of stress in which two of the three principal stresses are zero.			
851	microreactor microgravity	Law	Mechanical
A state of very weak gravity, such that the gravitational acceleration experienced by an observer inside the system in question is of the order of one-millionth of that on earth.			

2116	principal strain	Law	Mechanical
The elongation or compression of one of the principal axes of strain relative to its original length.			
8509	redundancy	Law	Mechanical
A statically indeterminate structure.			
2137	elastica	Law	Mechanical
The elastic curve formed by a uniform rod that is originally straight, then is bent in a principal plane by applying forces, and couples only at its ends.			
1395	radial band pressure	Law	Mechanical
The pressure which is exerted on the rotating band by the walls of the gun tube, and hence against the projectile wall at the band seat, as a result of the engraving of the band by the gun rifling.			
167	fatigue limit	Law	Mechanical
The maximum stress that a material can endure for an infinite number of 211 fatigue ratio stress cycles without breaking. Also known as endurance limit.			
8456	centrifugal barrier	Law	Mechanical
A steep rise, located around the center of force, in the effective potential governing the radial motion of a particle of nonvanishing angular momentum in a central force field, which results from the centrifugal force and prevents the particle from reaching the center of force, or causes its Schrodinger wave function to vanish there in a quantum-mechanical			
8438	Rayleigh line	Law	Mechanical
A straight line connecting points corresponding to the initial and final states on a graph of pressure versus specific volume for a substance subjected to a shock wave.			
8428	homogeneous strain	Law	Mechanical
A strain in which the components of the displacement of any point in the body are linear functions of the original coordinates.			
2144	Larson-Miller parameter	Law	Mechanical
The effects of time and temperature on creep, being defined empirically as $P = T (C + \log t) \times 10^{-3}$ , where $T$ = test temperature in degrees Rankine (degrees Fahrenheit + 460) and $t$ = test time in hours; the constant $C$ depends upon the material but is frequently taken to be 20.			
10405	resisting moment	Law	Mechanical

A moment produced by internal tensile and compressive forces that balances the external bending moment on a beam.

842      shearing stress      Law      Mechanical

A stress in which the material on one side of a surface pushes on the material on the other side of the surface with a force which is parallel to the surface. Also known as shear stress; tangential stress.

2110      impact energy      Law      Mechanical

The energy necessary to fracture a material. Also known as impact strength.

8418      alternating stress      Law      Mechanical

A stress produced in a material by forces which are such that each force alternately acts in opposite directions.

8417      internal stress      Law      Mechanical

A stress system within a solid that is not dependent on external forces. Also known as residual stress.

8416      compressive stress      Law      Mechanical

A stress which causes an elastic body to shorten in the direction of the applied force.

2155      angle variable      Law      Mechanical

The dynamical variable w conjugate to the action variable J, defined only for periodic motion.

2158      vertical drop      Law      Mechanical

The drop of an object in trajectory or along a plumb line, measured vertically from its line of departure to the object.

8382      determinate structure      Law      Mechanical

A structure in which the equations of statics alone are sufficient to determine the stresses and reactions. determinism See causality.

1648      barodynamics      Law      Mechanical

The mechanics of heavy structures which may collapse under their own weight.

163      collapsing pressure      Law      Mechanical

The minimum external pressure which causes a thin-walled body or structure to collapse.

7106      equivalent bending moment      Law      Mechanical

A bending moment which, acting alone, would produce in a circular shaft a normal stress of the same magnitude as the maximum normal stress produced by a given bending moment and a given twisting moment acting simultaneously.

12976      inertial reference frame      Law      Mechanical

A coordinate system in which a body moves with constant velocity as long as no force is acting on it. Also known as inertial coordinate system.

2174      eccentricity      Law      Mechanical

The distance of the geometric center of a revolving body from the axis of rotation.

2194      compliance      Law      Mechanical

The displacement of a linear mechanical system under a unit force. compliance constant

8329      neutral surface      Law      Mechanical

A surface in a bent beam along which material is neither compressed nor extended.

2147      Poynting effect      Law      Mechanical

The effect of torsion of a very long cylindrical rod on its length.

10940      harmonic synthesizer      Law      Mechanical

A machine which combines elementary harmonic constituents into a single periodic function; a tide-predicting machine is an example.

1803      geographical mile      Law      Mechanical

The length of 1 minute of arc of the Equator, or 6087.08 feet (1855.34 meters), which approximates the length of the nautical mile.

10839      strain ellipsoid      Law      Mechanical

A mathematical representation of the strain of a homogeneous body by a strain that is the same at all points or of unequal stress at a particular point. Also known as deformation ellipsoid.

13062      motion      Law      Mechanical

A continuous change of position of a body.

1813      Bobillier's law      Law      Mechanical

The law that, in general plane rigid motion, when a and b are the respective centers of curvature of points A and B, the angle between Aa and the tangent to the centrode of rotation (pole tangent) and the angle between Bb and a line from the centrode to the intersection of AB and ab (collineation axis) are equal and opposite.

9785      conservation of areas      Law      Mechanical

A principle governing the motion of a body moving under the action of a central force, according to which a line joining the body with the center of force sweeps out equal areas in equal times.

10840	stress ellipsoid	Law	Mechanical
A mathematical representation of the state of stress at a point that is defined by the minimum, intermediate, and maximum stresses and their intensities.			
977	Routh's procedure	Law	Mechanical
A procedure for modifying the Lagrangian of a system so that the modified function satisfies a modified form of Lagrange's equations in which ignorable coordinates are eliminated.			
10857	Galitzin pendulum	Law	Mechanical
A massive horizontal pendulum that is used to measure variations in the direction of the force of gravity with time, and thus serves as the basis of a seismograph.			
748	angular acceleration	Law	Mechanical
The time rate of change of angular velocity.			
749	angular velocity	Law	Mechanical
The time rate of change of angular displacement.			
750	strain rate	Law	Mechanical
The time rate for the usual tensile test.			
1595	Newtonian attraction	Law	Mechanical
The mutual attraction of any two particles in the universe, as given by Newton's law of gravitation.			
1686	bearing strength	Law	Mechanical
The maximum load that a column, wall, footing, or joint will sustain at failure, divided by the effective bearing area.			
679	newton-meter of torque	Law	Mechanical
The unit of torque in the meter-kilogram-second system, equal to the torque produced by 1 newton of force acting at a perpendicular distance of 1 meter from an axis of rotation. Abbreviated N-m.			
1713	inertial mass	Law	Mechanical
The mass of an object as determined by Newton's second law, in contrast to the mass as determined by the proportionality to the gravitational force.			
142	dynamical similarity	Law	Mechanical
Two flow fields are dynamically similar if one can be transformed into the other by a change of length and velocity scales. All dimensionless numbers of the flows must be the same.			

9676	mechanical property	Law	Mechanical
A property that involves a relationship between stress and strain or a reaction to an applied force.			
964	shock	Law	Mechanical
A pulse or transient motion or force lasting thousandths to tenths of a second which is capable of exciting mechanical resonances; for example, a blast produced by explosives.			
1843	rotational energy	Law	Mechanical
The kinetic energy of a rigid body due to rotation.			
727	wind pressure	Law	Mechanical
The total force exerted upon a structure by wind. Also known as velocity pressure.			
1848	cubical dilation	Law	Mechanical
The isotropic part of the strain tensor describing the deformation of an elastic solid, equal to the fractional increase in volume.			
1853	center of suspension	Law	Mechanical
The intersection of the axis of rotation of a pendulum with a plane perpendicular to the axis that passes through the center of mass.			
14	shearing forces	Law	Mechanical
Two forces that are equal in magnitude, opposite in direction, and act along two distinct parallel lines.			
1857	meter	Law	Mechanical
The international standard unit of length, equal to the length of the path traveled by light in vacuum during a time interval of $1/299,792,458$ of a second. Abbreviated m.			
1858	erection stress	Law	Mechanical
The internal forces exerted on a structural member during construction.			
9588	mass	Law	Mechanical
A quantitative measure of a body's resistance to being accelerated; equal to the inverse of the ratio of the body's acceleration to the acceleration of a standard mass under otherwise identical conditions.			
1697	compressive strength	Law	Mechanical
The maximum compressive stress a material can withstand without failure.			
9680	toughness	Law	Mechanical



A property of a material capable of absorbing energy by plastic deformation; intermediate between softness and

10834      inertia matrix      Law      Mechanical

A matrix  $M$  used to express the kinetic energy  $T$  of a mechanical system during small displacements from an equilibrium position, by means of the equation  $T = 1/2 \dot{q}^T M \dot{q}$ , where  $q$  is the vector whose components are the derivatives of the generalized coordinates of the system with respect to time, and  $\dot{q}^T$  is the transpose of  $\dot{q}$ .

1080      dry measure      Law      Mechanical

A measure of volume for commodities that are dry.

1733      yield point      Law      Mechanical

The lowest stress at which strain increases without increase in stress. yield rate

1734      yield stress      Law      Mechanical

The lowest stress at which extension of the tensile test piece increases without increase in load.

10805      flexural modulus      Law      Mechanical

A measure of the resistance of a beam of specified material and cross section to bending, equal to the product of Young's modulus for the material and the square of the radius of gyration of the beam about its neutral axis.

1760      updraft furnace unit stress      Law      Mechanical

The load per unit of area. unity power factor

1768      translation      Law      Mechanical

The linear movement of a point in space without any rotation. translational motion

9986      inclined plane      Law      Mechanical

A plane surface at an angle to some force or reference line.

9982      invariable plane      Law      Mechanical

A plane which is perpendicular to the angular momentum vector of a rotating rigid body not subject to external torque, and which is always tangent to its inertia ellipsoid.

177      effective gun bore line      Law      Mechanical

The line which a projectile should follow when the muzzle velocity of the antiaircraft gun is vectorially added to the aircraft velocity.

747      speed      Law      Mechanical

The time rate of change of position of a body without regard to direction; in other words, the magnitude of the velocity

vector.

104      centigram      Law      Mechanical

Unit of mass equal to 0.01 gram or 10<sup>-5</sup> kilogram. Abbreviated cg.

10815      transmissibility      Law      Mechanical

A measure of the ability of a system either to amplify or to suppress an input vibration, equal to the ratio of the response amplitude of the system in steady-state forced vibration to the excitation amplitude; the ratio may be in forces, displacements, velocities, or accelerations.

171      air density      Law      Mechanical

The mass per unit volume of air.

10827      modulus of elasticity in shear      Law      Mechanical

A measure of a material's resistance to shearing stress, equal to the shearing stress divided by the resultant angle of deformation expressed in radians.

179      elastic axis      Law      Mechanical

The lengthwise line of a beam along which transverse loads must be applied in order to produce bending only, with no torsion of the beam at any section.

10835      stiffness matrix      Law      Mechanical

A matrix K used to express the potential energy V of a mechanical system during small displacements from an equilibrium position, by means of the equation  $V = \frac{1}{2}q^TKq$ , where q is the vector whose components are the generalized components of the system with respect to time and q<sup>T</sup> is the transpose of q. Also known as stability matrix.

9910      instantaneous center      Law      Mechanical

A point about which a rigid body is rotating at a given instant in time. Also known as instant center.

9909      point of contraflexure      Law      Mechanical

A point at which the direction of bending changes. Also known as point of inflection.

9905      center of twist      Law      Mechanical

A point on a line parallel to the axis of a beam through which any transverse force must be applied to avoid twisting of the section. Also known as shear center.

9904      set forward point      Law      Mechanical

A point on the expected course of the target at which it is predicted the target will arrive at the end of the time of flight.

1714	density	Law	Mechanical
The mass of a given substance per unit volume.			
9902	center of attraction	Law	Mechanical
A point toward which a force on a body or particle (such as gravitational or electrostatic force) is always directed; the magnitude of the force depends only on the distance of the body or particle from this point.			
13063	rectilinear motion	Law	Mechanical
A continuous change of position of a body so that every particle of the body follows a straight-line path. Also known as linear motion.			
1773	line of fall	Law	Mechanical
The line tangent to the ballistic trajectory at the level point.			
1775	line of flight	Law	Mechanical
The line of movement, or the intended line of movement, of an aircraft, guided missile, or projectile in the air.			
178	effective launcher line	Law	Mechanical
The line along which the aircraft rocket would go if it were not affected by gravity.			
10837	Galilean transformation	Law	Mechanical
A mathematical transformation used to relate the space and time variables of two uniformly moving (inertial) reference systems in nonrelativistic kinematics.			
1869	impulse	Law	Mechanical
The integral of a force over an interval of time.			
10816	bursting strength	Law	Mechanical
A measure of the ability of a material to withstand pressure without rupture; it is the hydraulic pressure required to burst a vessel of given thickness.			
10184	strain rosette	Law	Mechanical
A pattern of intersecting lines on a surface along which linear strains are measured to find stresses at a point.			
1867	angular impulse	Law	Mechanical
The integral of the torque applied to a body over time.			
1490	body centre	Law	Mechanical

The path traced by the instantaneous center of a rotating body relative to the body.

13067	vibration	Law	Mechanical
-------	-----------	-----	------------

A continuing periodic change in a displacement with respect to a fixed reference.

1467	surge stress	Law	Mechanical
------	--------------	-----	------------

The physical stress on process equipment or systems resulting from a sudden surge in fluid (gas or liquid) flow rate or pressure.

1453	plane of yaw	Law	Mechanical
------	--------------	-----	------------

The plane determined by the tangent to the trajectory of a projectile in flight and the axis of the projectile.

169	allowable load	Law	Mechanical
-----	----------------	-----	------------

The maximum force that may be safely applied to a solid, or is permitted by applicable regulators.

1946	total pressure total pressure	Law	Mechanical
------	-------------------------------	-----	------------

The gross load applied on a given surface.

1948	proportional elastic limit	Law	Mechanical
------	----------------------------	-----	------------

The greatest stress intensity for which stress is still proportional to strain.

1949	proportional limit	Law	Mechanical
------	--------------------	-----	------------

The greatest stress a material can sustain without departure from linear proportionality of stress and strain.

1950	Euler force	Law	Mechanical
------	-------------	-----	------------

The greatest load that a long, slender column can carry without buckling, according to the Euler formula for long columns.

Euler formula for long columns

9232	rotator	Law	Mechanical
------	---------	-----	------------

A rotating rigid body.

1952	gravitational displacement	Law	Mechanical
------	----------------------------	-----	------------

The gravitational field strength times the gravitational constant. Also known as gravitational flux density.

1492	centrode	Law	Mechanical
------	----------	-----	------------

The path traced by the instantaneous center of a plane figure when it undergoes plane motion.

1953	gravitometer See densimeter gravity	Law	Mechanical
------	-------------------------------------	-----	------------

The gravitational attraction at the surface of a planet or other celestial body.

722	torsional angle	Law	Mechanical
The total relative rotation of the ends of a straight cylindrical bar when subjected to a torque.			
1963	generalized force	Law	Mechanical
The generalized force corresponding to a generalized coordinate is the ratio of the virtual work done in an infinitesimal virtual displacement, which alters that coordinate and no other, to the change in the coordinate.			
9144	stress tensor	Law	Mechanical
A second-rank tensor whose components are stresses exerted across surfaces perpendicular to the coordinate			
9143	strain tensor	Law	Mechanical
A second-rank tensor whose components are the nine possible strains. strake			
11143	moving load	Law	Mechanical
A load that can move, such as vehicles or pedestrians.			
11147	uniform load	Law	Mechanical
A load distributed uniformly over a portion or over the entire length of a beam; measured in pounds per foot.			
1977	Mersenne's law	Law	Mechanical
The fundamental frequency of a vibrating string is proportional to the square root of the tension and inversely proportional both to the length and the square root of the mass per unit length.			
1978	Lagrangian function	Law	Mechanical
The function which measures the difference between the kinetic and potential energy of a dynamical system. Lagrangian generalized velocity See generalized velocity.			
716	ballistic trajectory	Law	Mechanical
The trajectory followed by a body being acted upon only by gravitational forces and resistance of the medium through which it passes.			
715	mean trajectory	Law	Mechanical
The trajectory of a missile that passes through the center of impact or center of burst.			
1984	kinetic friction	Law	Mechanical
The friction between two surfaces which are sliding over each other. kinetic momentum			
11185	invariable line	Law	Mechanical
A line which is parallel to the angular momentum vector of a body executing Poinot motion, and which passes through the			

fixed point in the body about which there is no torque.

9118      secondary stress      Law      Mechanical

A self-limiting normal or shear stress which is caused by the constraint of a structure and which is expected to cause minor distortions that would not result in a failure of the structure.

1690      burst pressure      Law      Mechanical

The maximum inside pressure that a process vessel can safely withstand.

9225      screw displacement      Law      Mechanical

A rotation of a rigid body about an axis accompanied by a translation of the body along the same axis.

13066      longitudinal vibration      Law      Mechanical

A continuing periodic change in the displacement of elements of a rod-shaped object in the direction of the long axis of the rod.

824      octahedral shear stress      Law      Mechanical

The tangential component of stress across the faces of a regular octahedron whose vertices lie on the principal axes of stress; it is a measure of the strength of the deviatoric stress.

10159      harmonic motion      Law      Mechanical

A periodic motion that is a sinusoidal function of time, that is, motion along a line given by the equation  $x = a \cos (kt + 0)$ , where  $t$  is the time parameter, and  $a$ ,  $k$ , and  $0$  are constants. Also known as harmonic vibration; simple harmonic motion (SHM).

10160      torsional vibration      Law      Mechanical

A periodic motion of a shaft in which the shaft is twisted about its axis first in one direction and then in the other; this motion may be superimposed on rotational or other motion.

1883      primary creep      Law      Mechanical

The initial high strainrate region in a material subjected to sustained stress.

1588      kinetic reaction      Law      Mechanical

The negative of the mass of a body multiplied by its acceleration. kinetics

1585      octahedral normal stress      Law      Mechanical

The normal component of stress across the faces of a regular octahedron whose vertices lie on the principal axes of stress; it is equal in magnitude to the spherical stress across any surface. Also known as mean stress.

158	fatigue life	Law	Mechanical
The number of applied repeated stress cycles a material can endure before failure.			
772	viscoelastic theory	Law	Mechanical
The theory which attempts to specify the relationship between stress and strain in a material displaying viscoelasticity.			
9449	laboratory coordinate system	Law	Mechanical
A reference frame attached to the laboratory of the observer, in contrast to the center-of-mass system.			
9448	center-of-mass coordinate system	Law	Mechanical
A reference frame which moves with the velocity of the center of mass, so that the center of mass is at rest in this system, and the total momentum of the system is zero. Also known as center of momentum coordinate system.			
1560	ballistic coefficient	Law	Mechanical
The numerical measure of the ability of a missile to overcome air resistance; dependent upon the mass, diameter, and form factor.			
566	isodynamic	Law	Mechanical
Pertaining to equality of two or more forces or to constancy of a force. isoelectric			
149	space centrode	Law	Mechanical
The path traced by the instantaneous center of a rotating body relative to an inertial frame of reference.			
1692	allowable stress	Law	Mechanical
The maximum force per unit area that may be safely applied to a solid.			
1868	principal function	Law	Mechanical
The integral of the Lagrangian of a system over time; it is involved in the statement of Hamilton's principle. principal item			
1499	central orbit	Law	Mechanical
The path followed by a body moving under the action of a central force.			
776	Clapeyron's theorem	Law	Mechanical
The theorem that the strain energy of a deformed body is equal to one-half the sum over three perpendicular directions of the displacement component times the corresponding force component, including deforming loads and body forces, but not the six constraining forces required to hold the body in equilibrium.			
1495	free-flight trajectory	Law	Mechanical
The path of a body in free fall.			

13006	characteristic length	Law	Mechanical
A convenient reference length (usually constant) of a given configuration, such as overall length of an aircraft, the maximum diameter or radius of a body of revolution, or a chord or span of a lifting surface.			
778	Varignon's theorem	Law	Mechanical
The theorem that the moment of a force is the algebraic sum of the moments of its vector components acting at a common point on the line of action of the force.			
9403	ballistic density	Law	Mechanical
A representation of the atmospheric density encountered by a projectile in flight, expressed as a percentage of the density according to the standard artillery atmosphere.			
11083	roll axis	Law	Mechanical
A longitudinal axis through an aircraft, rocket, or similar body, about which the body rolls.			
1903	instantaneous recovery	Law	Mechanical
The immediate reduction in the strain of a solid when a stress is removed or reduced, in contrast to creep recovery.			
1904	instantaneous strain	Law	Mechanical
The immediate deformation of a solid upon initial application of a stress, in contrast to creep strain.			
1905	rotational reactance	Law	Mechanical
The imaginary part of the rotational impedance. Also known as mechanical rotational reactance.			
1910	free fall	Law	Mechanical
The ideal falling motion of a body acted upon only by the pull of the earth's gravitational field.			
1494	elliptical orbit	Law	Mechanical
The path of a body moving along an ellipse, such as that described by either of two bodies revolving under their mutual gravitational attraction but otherwise undisturbed.			
9365	top	Law	Mechanical
A rigid body, one point of which is held fixed in an inertial reference frame, and which usually has an axis of symmetry passing through this point; its motion is usually studied when it is spinning rapidly about the axis of symmetry.			
13185	station roof state of strain	Law	Mechanical
A complete description, including the six components of strain, of the deformation within a homogeneously deformed volume.			



7495	lambda	Law	Mechanical
A unit of volume equal to 10 <sup>6</sup> liter or 10 <sup>9</sup> cubic meter.			
7512	millimeter of water	Law	Mechanical
A unit of pressure, equal to the pressure exerted by a column of water 1 millimeter high with a density of 1 gram per cubic centimeter under the standard acceleration of gravity; equal to 9.80665 pascals. Abbreviated mmH <sub>2</sub> O.			
896	breaking load	Law	Mechanical
The stress which, when steadily applied to a structural member, is just sufficient to break or rupture it. Also known as ultimate load.			
897	creep strength	Law	Mechanical
The stress which, at a given temperature, will result in a creep rate of 1% deformation within 100,000 hours.			
898	creep rupture strength	Law	Mechanical
The stress which, at a given temperature, will cause a material to rupture in a given time.			
899	operating stress	Law	Mechanical
The stress to which a structural unit is subjected in service.			
7504	blink	Law	Mechanical
A unit of time equal to 10 <sup>-5</sup> day or to 0.864 second.			
7503	hour	Law	Mechanical
A unit of time equal to 3600 seconds. Abbreviated h; hr.			
7502	nanosecond	Law	Mechanical
A unit of time equal to one-billionth of a second, or 10 <sup>-9</sup> second.			
750	microsecond	Law	Mechanical
A unit of time equal to one-millionth of a second. Abbreviated JJLs.			
7500	millisecond	Law	Mechanical
A unit of time equal to one-thousandth of a second. Abbreviated ms; msec.			
7499	megasecond	Law	Mechanical
A unit of time, equal to 1,000,000 seconds. Abbreviated Ms; Msec. megawatt			
7498	eon	Law	Mechanical

A unit of time, equal to 109 years. Eotvos effect

2376	biaxial stress	Law	Mechanical
------	----------------	-----	------------

The condition in which there are three mutually perpendicular principal stresses; two act in the same plane and one is

7496	stere	Law	Mechanical
------	-------	-----	------------

A unit of volume equal to 1 cubic meter; it is used mainly in France, and in measuring timber volumes.

7515	technical atmosphere	Law	Mechanical
------	----------------------	-----	------------

A unit of pressure in the metric technical system equal to one kilogram-force per square centimeter. Abbreviated at.

7494	kiloliter	Law	Mechanical
------	-----------	-----	------------

A unit of volume equal to 1000 liters or to 1 cubic meter. Abbreviated kl. kilometer

7493	fluid ton	Law	Mechanical
------	-----------	-----	------------

A unit of volume equal to 32 cubic feet or approximately 0.90614 cubic meter; used for many hydrometallurgical, hydraulic, and other industrial purposes.

7492	centiliter	Law	Mechanical
------	------------	-----	------------

A unit of volume equal to 0.01 liter or to 10<sup>-5</sup> cubic meter.

749	cusec	Law	Mechanical
-----	-------	-----	------------

A unit of volume flow rate, used primarily to describe pumps, equal to a uniform flow of 1 cubic foot in 1 second. Also known as cubic foot per second (cfs).

7490	minim	Law	Mechanical
------	-------	-----	------------

A unit of volume in the apothecaries' measure; equals 1/60 fluidram (approximately 0.061612 cubic centimeter) or about 1 drop (of water). Abbreviated min.

7488	liter	Law	Mechanical
------	-------	-----	------------

A unit of volume or capacity, equal to 1 decimeter cubed, or 0.001 cubic meter, or 1000 cubic centimeters. Abbreviated l;

7486	teaspoonful	Law	Mechanical
------	-------------	-----	------------

A unit of volume used particularly in cookery and pharmacy, equal to 1 1/3 fluid drams, or 1/3 tablespoonful; in the United States this is equal to approximately 4.9289 cubic centimeters, in the United Kingdom to approximately 4.7355 cubic centimeters. Abbreviated tsp; tspn.

7485	tablespoonful	Law	Mechanical
------	---------------	-----	------------

A unit of volume used particularly in cookery, equal to 4 fluid drams or 1/2 fluid ounce; in the United States this is equal to

approximately 14.7868 cubic centimeters, in the United Kingdom to approximately 14.2065 cubic centimeters. Abbreviated  
tbsp.

7484	deciliter	Law	Mechanical
------	-----------	-----	------------

A unit of volume, equal to 0.1 liter, or 10<sup>-4</sup> cubic meter.

7483	decastere	Law	Mechanical
------	-----------	-----	------------

A unit of volume, equal to 10 cubic meters.

7482	decaliter	Law	Mechanical
------	-----------	-----	------------

A unit of volume, equal to 10 liters, or to 0.01 cubic meter.

7479	cubic measure	Law	Mechanical
------	---------------	-----	------------

A unit or set of units to measure volume.

7547	pli	Law	Mechanical
------	-----	-----	------------

A unit of line density (mass per unit length) equal to 1 pound per inch, or approximately 17.8580 kilograms per meter.

7497	minute	Law	Mechanical
------	--------	-----	------------

A unit of time, equal to 60 seconds. mired

753	livre	Law	Mechanical
-----	-------	-----	------------

A unit of mass, used in France, equal to 0.5 kilogram.

10517	meter-kilogram-second system	Law	Mechanical
-------	------------------------------	-----	------------

A metric system of units in which length, mass, and time are fundamental quantities, and the units of these quantities are the meter, the kilogram, and the second respectively. Abbreviated mks system. { ' me<sup>-</sup> d-sr 'kil-3,gram 'sek-snd ,sistsm  
meter prover

7545	gamma	Law	Mechanical
------	-------	-----	------------

A unit of mass equal to 10<sup>-6</sup> gram or 10<sup>-9</sup> kilogram.

7544	hectogram	Law	Mechanical
------	-----------	-----	------------

A unit of mass equal to 100 grams. Abbreviated hg.

7543	milligram	Law	Mechanical
------	-----------	-----	------------

A unit of mass equal to onethousandth of a gram. Abbreviated mg. 356 minor diameter milling See millimeter of mercury.  
milli-inch See mil milliliter

7542	stone	Law	Mechanical
A unit of mass in common use in the United Kingdom, equal to 14 pounds or 6.35029318 kilograms.			
754	slug	Law	Mechanical
A unit of mass in the British gravitational system of units, equal to the mass which experiences an acceleration of 1 foot per second per second when a force of 1 pound acts on it; equal to approximately 32.1740 pound mass or 14.5939 kilograms. Also known as geepound.			
7540	tonne	Law	Mechanical
A unit of mass in the metric system, equal to 1000 kilograms or to approximately 2204.62 pound mass. Also known as metric ton; millier; ton; tonneau.			
7539	grain	Law	Mechanical
A unit of mass in the United States and United Kingdom, common to the avoirdupois, apothecaries', and troy systems, equal to 1/7000 of a pound, or to 6.479891 X 10 <sup>-5</sup> kilogram. Abbreviated gr.			
7538	decigram	Law	Mechanical
A unit of mass, equal to 0.1 gram.			
7537	avogram	Law	Mechanical
A unit of mass, equal to 1 gram divided by the Avogadro number.			
7536	mounce	Law	Mechanical
A unit of mass, equal to 25 grams. Also known as metric ounce. mount			
7535	metric grain	Law	Mechanical
A unit of mass, equal to 50 milligrams; used in commercial transactions in precious stones.			
7534	glug	Law	Mechanical
A unit of mass, equal to the mass which is accelerated by 1 centimeter per second per second by a force of 1 gram-force, or to 980.665 grams.			
7513	millimeter of mercury	Law	Mechanical
A unit of pressure, equal to the pressure exerted by a column of mercury 1 millimeter high with a density of 13.5951 grams per cubic centimeter under the standard acceleration of gravity; equal to 133.322387415 pascals; it differs from the torr by less than 1 part in 7,000,000. Abbreviated mmHg. Also known as milling.			
7522	atmosphere	Law	Mechanical

A unit of pressure equal to 101.325 kilopascals, which is the air pressure measured at mean sea level. Abbreviated atm.  
Also known as standard atmosphere.

2377      hydrostatic stress      Law      Mechanical

The condition in which there are equal compressive stresses or equal tensile stresses in all directions, and no shear stresses on any plane.

7516      centimeter of mercury      Law      Mechanical

A unit of pressure equal to the pressure that would support a column of mercury 1 centimeter high, having a density of 13.5951 grams per cubic centimeter, when the acceleration of gravity is equal to its standard value (980.665 centimeters per second per second); it is equal to 1333.22387415 pascals; it differs from the dekatorr by less than 1 part in 7,000,000. Abbreviated cmHg. Also known as centihg.

7517      pound per square inch      Law      Mechanical

A unit of pressure equal to the pressure resulting from a force of 1 pound applied uniformly over an area of 1 square inch. Abbreviated psi.

7518      pound per square foot      Law      Mechanical

A unit of pressure equal to the pressure resulting from a force of 1 pound applied uniformly over an area of 1 square foot. Abbreviated psf.

7519      pascal      Law      Mechanical

A unit of pressure equal to the pressure resulting from a force of 1 newton acting uniformly over an area of 1 square meter. Symbolized Pa.

7533      metric-technical unit of mass      Law      Mechanical

A unit of mass, equal to the mass which is accelerated by 1 meter per second per second by a force of 1 kilogram-force; it is equal to 9.80665 kilograms.

752      bar      Law      Mechanical

A unit of pressure equal to 105 pascals, or 105 newtons per square meter, or 106 dynes per square centimeter.

7532      crith      Law      Mechanical

A unit of mass, used for gases, equal to the mass of 1 liter of hydrogen at standard pressure and temperature; it is found experimentally to equal  $8.9885 \times 10^{-5}$  kilogram.

7523      centibar      Law      Mechanical

A unit of pressure equal to 0.01 bar or to 1000 pascals.

7525	milliwatt	Law	Mechanical
A unit of power equal to onethousandth of a watt. Abbreviated mW. mill length See random length.			
7526	microwatt	Law	Mechanical
A unit of power equal to onemillionth of a watt. Abbreviated JWL.			
7527	picowatt	Law	Mechanical
A unit of power equal to 10 <sup>-12</sup> watt, or one-millionth of a microwatt. Abbreviated pW.			
7529	mohm	Law	Mechanical
A unit of mechanical mobility, equal to the reciprocal of 1 mechanical ohm.			
7514	torr	Law	Mechanical
A unit of pressure, equal to 1/760 atmosphere; it differs from 1 millimeter of mercury by less than one part in seven million; approximately equal to 133.3224 pascals.			
7520	millibar	Law	Mechanical
A unit of pressure equal to onethousandth of a bar. Abbreviated mb. Also known as vac.			
1128	Poisson number	Law	Mechanical
The reciprocal of the Poisson ratio.			
1377	superposition theorem.	Law	Mechanical
The principle that when two or more forces act on a particle at the same time, the resultant force is the vector sum of the two.			
1376	principle of least action	Law	Mechanical
The principle that, for a system whose total mechanical energy is conserved, the trajectory of the system in configuration space is that path which makes the value of the action stationary relative to nearby paths between the same configurations and for which the energy has the same constant value.			
246	potential energy	Law	Mechanical
The capacity to do work that a body or system has by virtue of its position or configuration.			
2468	ballistic uniformity	Law	Mechanical
The capability of a propellant, when fired under identical conditions from round to round, to impart uniform muzzle velocity and produce similar interior ballistic results.			
902	yield strength	Law	Mechanical

The stress at which a material exhibits a specified deviation from proportionality of stress and strain.

2479	British imperial pound	Law	Mechanical
------	------------------------	-----	------------

The British standard of mass, of which a standard is preserved by the government.

7128	bushel	Law	Mechanical
------	--------	-----	------------

Abbreviated bu. 1. A unit of volume (dry measure) used in the United States, equal to 2150.42 cubic inches or approximately 35.239 liters. 2. A unit of volume (liquid and dry measure) used in Britain, equal to 2219.36 cubic inches or 8 imperial gallons (approximately 36.369 liters).

248	shattering	Law	Mechanical
-----	------------	-----	------------

The breaking up into highly irregular, angular blocks of a very hard material that has been subjected to severe stresses.

7126	fluid dram	Law	Mechanical
------	------------	-----	------------

Abbreviated fl dr. 1. A unit of volume used in the United States for measurement of liquid substances, equal to 1/8 fluid ounce, or  $3.6966911953125 \times 10^{-6}$  cubic meter.

7125	fluid ounce	Law	Mechanical
------	-------------	-----	------------

Abbreviated fl oz. 1. A unit of volume that is used in the United States for measurement of liquid substances, equal to 1/16 liquid pint, or  $231/128$  cubic inches, or  $2.95735295625 \times 10^{-5}$  cubic meter. 2. A unit of volume used in the United Kingdom for measurement of liquid substances, and occasionally of solid substances, equal to 1/20 pint or  $2.84130625 \times 10^{-5}$  cubic meter.

7124	gallon	Law	Mechanical
------	--------	-----	------------

Abbreviated gal. 1. A unit of volume used in the United States for measurement of liquid substances, equal to 231 cubic inches, or to  $3.785411784 \times 10^{-3}$  cubic meter, or to 3.785411784 liters; equal to 128 fluid ounces. 2. A unit of volume used in the United Kingdom for measurement of liquid and solid substances, usually the former; equal to  $4.54609 \times 10^{-3}$  cubic meter, or to 4.54609 liters; equal to 160 fluid ounces. Also known as imperial gallon.

7123	peck	Law	Mechanical
------	------	-----	------------

Abbreviated pk. 1. A unit of volume used in the United States for measurement of solid substances, equal to 8 dry quarts, or 1/4 bushel, or 537.605 cubic inches, or 0.00880976754172 cubic meter. 2. A unit of volume used in the United Kingdom for measurement of solid and liquid substances, although usually the former, equal to 2 gallons, or 0.00909218 cubic

1379	principle of virtual work	Law	Mechanical
------	---------------------------	-----	------------

The principle that the total work done by all forces acting on a system in static equilibrium is zero for any infinitesimal displacement from equilibrium which is consistent with the constraints of the 425 printed circuit system. Also known as

virtual work principle.

712      quart      Law      Mechanical

Abbreviated qt. 1. A unit of volume used for measurement of liquid substances in the United States, equal to 2 pints, or 1/4 gallon, or 573/4 cubic inches, or  $9.46352946 \times 10^{-4}$  cubic meter. 2. A unit of volume used for measurement of solid substances in the United States, equal to 2 dry pints, or 1/32 bushel, or 107,521/1600 cubic inches, or approximately  $1.10122 \times 10^{-3}$  cubic meter. 3. A unit of volume used for measurement of both liquid and solid substances, although mainly the former, in the United Kingdom and Canada, equal to 2 U.K.

11630      two-degrees-of-freedom gyro      Law      Mechanical

A gyro whose spin axis is free to rotate about two orthogonal axes, not counting the spin axis.

13877      gal      Law      Mechanical

1. The unit of acceleration in the centimeter-gram-second system, equal to 1 centimeter per second squared; commonly used in geodetic measurement. Formerly known as galileo.

353      principal axis of stress      Law      Mechanical

One of the three mutually perpendicular axes of a body that are perpendicular to the principal planes of stress. Also known as stress axis.

7105      Airy stress function      Law      Mechanical

Abiharmonic function of two variables whose second partial derivatives give the stress components of a body subject to a plane strain.

7094      nutation      Law      Mechanical

Abobbingor nodding up-anddown motion of a spinning rigid body, such as a top, as it precesses about its vertical axis.

7085      macrorheology      Law      Mechanical

Abranchofrheologyin which materials are treated as homogeneous or quasi-homogeneous, and processes are treated as isothermal.

7059      negative acceleration      Law      Mechanical

Acceleration in a direction opposite to the velocity, or in t h e direction of the negative axis of a coordinate system.

7038      rotational impedance      Law      Mechanical

Acomplex quantity, equal to the phasor representing the alternating torque acting on a system divided by the phasor representing the resulting angular velocity in the direction of the torque at its point of application. Also known as mechanical rotational impedance.



2484	bulk rheology	Law	Mechanical
The branch of rheology wherein study of t h e behavior of matter neglects effects due to the surface of a system.			
2485	statics	Law	Mechanical
The branch of mechanics which treats of force and force systems abstracted from matter, and of forces which act on bodies in equilibrium.			
7016	centrifugal	Law	Mechanical
Acting or moving in a direction away from the axis of rotation or the center of a circle along which a body is moving.			
7015	centripetal	Law	Mechanical
Acting or moving in a direction toward the axis of rotation or the center of a circle along which a body is moving.			
10595	Betti's method	Law	Mechanical
A method of finding t h e solution of the equations of equilibrium of an elastic body whose surface displacements are specified; it uses the fact that the dilatation is a harmonic function to reduce the problem to the Dirichlet problem.			
2486	gyroscopics	Law	Mechanical
The branch of mechanics concerned with gyroscopes and their use in stabilization and control of ships, aircraft, projectiles, and other objects.			
7122	pint	Law	Mechanical
Abbreviated pt. 1. A unit of volume, used in t h e United States for measurement of liquid substances, equal to 1/8 U.S. gallon, or 231/8 cubic inches, or 4.73176473 X 10 <sup>-4</sup> cubic meter. Also known as liquid pint (liq pt).			
7382	bound vector	Law	Mechanical
A vector whose line of application and point of application are both prescribed, in addition to its direction.			
2388	crushing strength	Law	Mechanical
The compressive stress required to cause a solid to fail by fracture; in essence, it is the resistance of the solid to vertical pressure placed upon it.			
2390	radial velocity	Law	Mechanical
The component of the velocity of a body that is parallel to a line from an observer or reference point to the body; the radial velocities of stars are valuable in determining the structure and dynamics of the Galaxy.			
2392	longitudinal acceleration	Law	Mechanical
The component of the linear acceleration of an aircraft, missile, or particle parallel to its longitudinal, or X, axis.			

2393	tangential acceleration	Law	Mechanical
The component of linear acceleration tangent to the path of a particle moving in a circular path.			
2399	mechanical impedance	Law	Mechanical
The complex ratio of a phasor representing a sinusoidally varying force applied to a system to a phasor representing the velocity of a point in the system. mechanical lift dock			
105	centiare	Law	Mechanical
Unit of area equal to 1 square meter. Also spelled centare.			
11619	pendulous gyroscope	Law	Mechanical
A gyroscope whose axis of rotation is constrained by a suitable weight to remain horizontal; it is the basis of one type of gyrocompass.			
900	normal stress	Law	Mechanical
The stress component at a point in a structure which is perpendicular to the reference plane.			
90	strength	Law	Mechanical
The stress at which material ruptures or fails.			
7390	Hamilton's principle	Law	Mechanical
A variational principle which states that the path of a conservative system in configuration space between two configurations is such that the integral of the Lagrangian function over time is a minimum or maximum relative to nearby paths between the same end points and taking the same time.			
7388	random vibration	Law	Mechanical
A varying force acting on a mechanical system which may be considered to be the sum of a large number of irregularly timed small shocks; induced typically by aerodynamic turbulence, airborne noise from rocket jets, and transportation over road surfaces.			
7386	Navier's equation	Law	Mechanical
A vector partial differential equation for the displacement vector of an elastic solid in equilibrium and subjected to a body force.			
7384	Runge vector	Law	Mechanical
A vector which describes certain unchanging features of a nonrelativistic two-body interaction obeying an inverse-square law, either in classical or quantum mechanics; its constancy is a reflection of the symmetry inherent in the			

inverse-square interaction.

1378      principle of dynamical similarity      Law      Mechanical

The principle that two physical systems which are geometrically and kinematically similar at a given instant, and physically similar in constitution, will retain this similarity at later corresponding instants if and only if the Froude number 1 for each independent type of force has identical values in the two systems. Also known as similarity principle.

7324      nonlinear vibration      Law      Mechanical

A vibration whose amplitude is large enough so that the elastic restoring force on the vibrating object is not proportional to its displacement.

7548      survey foot      Law      Mechanical

A unit of length, used by the U.S. Coast and Geodetic Survey, equal to 12/39.37 meter, or approximately 1.000002 feet. surveying altimeter

7248      Rayleigh wave      Law      Mechanical

A wave which propagates on the surface of a solid; particle trajectories are ellipses in planes normal to the surface and parallel to the direction of propagation.

7250      shear wave      Law      Mechanical

A wave that causes an element of an elastic medium to change its shape without changing its volume. Also known as rotational wave.

2446      secondary creep      Law      Mechanical

The change in shape of a substance under a minimum and almost constant differential stress, with the strain-time relationship a constant. Also known as steadystate creep.

10603      Poincare surface of section      Law      Mechanical

A method of displaying the character of a particular trajectory without examining its complete time development, in which the trajectory is sampled periodically, and the rate of change of a quantity under study is plotted against the value of that quantity at the beginning of each period. Also known as surface of section.

7383      sliding vector      Law      Mechanical

A vector whose direction and line of application are prescribed, but whose point of application is not prescribed.

2442      dynamic stability      Law      Mechanical

The characteristic of a body, such as an aircraft, rocket, or ship, that causes it, when disturbed from an original state of steady motion in an upright position, to damp the oscillations set up by restoring moments and gradually return to its original

state. Also known as stability.

685	dyne	Law	Mechanical
-----	------	-----	------------

The unit of force in the centimeter-

2428	nonquantum mechanics	Law	Mechanical
------	----------------------	-----	------------

The classical mechanics of Newton and Einstein as opposed to the quantum mechanics of Heisenberg, Schrodinger, and Dirac; particles have definite position and velocity, and they move according to Newton's laws.

7370	yaw axis	Law	Mechanical
------	----------	-----	------------

A vertical axis through an aircraft, rocket, or similar body, about which the body yaws; it may be a body, wind, or stability axis. Also known as yawing axis.

684	newton	Law	Mechanical
-----	--------	-----	------------

The unit of force in the meterkilogram-

7374	Coriolis force	Law	Mechanical
------	----------------	-----	------------

A velocity-dependent pseudoforce in a reference frame which is rotating with respect to an inertial reference frame; it is equal and opposite to the product of the mass of the particle on which the force acts and its Coriolis acceleration.

738	localized vector	Law	Mechanical
-----	------------------	-----	------------

A vector whose line of application or point of application is prescribed, in addition to its direction.

1163	single-degree-of-freedom gyro	Law	Mechanical
------	-------------------------------	-----	------------

A gyro the spin reference axis of which is free to rotate about only one of the orthogonal axes, such as the input or output axis.

13837	foot-pound	Law	Mechanical
-------	------------	-----	------------

1. Unit of energy or work in the English gravitational system, equal to the work done by 1 pound of force when the point at which the force is applied is displaced 1 foot in the direction of the force; equal to approximately 1.355818 joule.

Abbreviated ft-lb; ft-lbf.

7777	torsion	Law	Mechanical
------	---------	-----	------------

A twisting deformation of a solid body about an axis in which lines that were initially parallel to the axis become helices.

2307	ballistic curve	Law	Mechanical
------	-----------------	-----	------------

The curve described by the path of a bullet, a bomb, or other projectile as determined by the ballistic conditions, by the propulsive force, and by gravity.

7897	aerodynamic trajectory	Law	Mechanical
A trajectory or part of a trajectory in which the missile or vehicle encounters sufficient air resistance to stabilize its flight or to modify its course significantly.			
2308	trajectory	Law	Mechanical
The curve described by an object moving through space, as of a meteor through the atmosphere, a planet around the sun, a projectile fired from a gun, or a rocket in flight.			
7875	canonical transformation	Law	Mechanical
A transformation which occurs among the coordinates and momenta describing the state of a classical dynamical system and which leaves the form of Hamilton's equations of motion unchanged.			
2309	brachistochrone	Law	Mechanical
The curve along which a smooth-sliding particle, under the influence of gravity alone, will fall from one point to another in the minimum time.			
13707	plane lamina	Law	Mechanical
A body whose mass is concentrated in a single plane.			
87	rheology	Law	Mechanical
The study of the deformation and flow of matter, especially non-Newtonian flow of liquids and plastic flow of solids.			
10545	Euler method	Law	Mechanical
A method of studying fluid motion and the mechanics of deformable bodies in which one considers volume elements at fixed locations in space, across which material flows; the Euler method is in contrast to the Lagrangian method.			
1609	relative momentum	Law	Mechanical
The momentum of a body in a reference frame in which another specified body is fixed.			
10550	Muskhelishvili's method	Law	Mechanical
A method of solving problems concerning the elastic deformation of a planar body that involves using methods from the theory of functions of a complex variable to calculate analytic functions which determine the plane strain of the body.			
783	triangle of forces	Law	Mechanical
A triangle, two of whose sides represent forces acting on a particle, while the third represents the combined effect of these forces.			
10635	transfer-matrix method	Law	Mechanical

A method of analyzing vibrations of complex systems, in which the system is approximated by a finite number of elements connected in a chainlike manner, and matrices are constructed which can be used to determine the configuration and forces acting on one element in terms of those on another.

1157      torsion function      Law      Mechanical

A harmonic function,  $\phi(x,y) = w/T$ , expressing the warping of a cylinder undergoing torsion, where the  $x$ ,  $y$ , and  $z$  coordinates are chosen so that the axis of torsion lies along the  $z$  axis,  $w$  is the  $z$  component of the displacement, and  $T$  is the torsion angle. Also known as warping function.

1375      inextensional deformation      Law      Mechanical

A bending of a surface that leaves unchanged the length of any line drawn on the surface and the curvature of the surface at each point.

7919      balloting      Law      Mechanical

A tossing or bounding movement of a projectile, within the limits of the bore diameter, while moving through the bore under the influence of the propellant gases.

13768      duration      Law      Mechanical

A basic concept of kinetics which is expressed quantitatively by time measured by a clock or comparable mechanism.  
durometer

10627      Stodola method      Law      Mechanical

A method of calculating the deflection of a uniform or nonuniform beam in free transverse vibration at a specified frequency, as a function of distance along the beam, in which one calculates a sequence of straight beam deflection curves each of which is the deflection resulting from the loading corresponding to the previous deflection, and these deflections converge to the solution.

1384      Gauss' principle of least constraint      Law      Mechanical

The principle that the motion of a system of interconnected material points subjected to any influence is such as to minimize the constraint on the system; here the constraint, during an infinitesimal period of time, is the sum over the points of the product of the mass of the point times the square of its deviation from the position it would have occupied at the end of the time period if it had not been connected to other points.

1062      Otto-Lardillon method      Law      Mechanical

A method of computing trajectories of missiles with low velocities (so that drag is proportional to the velocity squared) and quadrant angles of departure that may be high, in which exact solutions of the equations of motion are arrived at by numerical integration and are then tabulated.

1383	least-energy principle	Law	Mechanical
The principle that the potential energy of a system in stable equilibrium is a minimum relative to that of nearby configurations.			
117	free flight	Law	Mechanical
Unconstrained or unassisted flight.			
13287	force polygon	Law	Mechanical
A closed polygon whose sides are vectors representing the forces acting on a body in equilibrium.			
2352	relative motion	Law	Mechanical
The continuous change of position of a body with respect to a second body or to a reference point that is fixed. Also known as apparent motion.			
2353	mechanical vibration	Law	Mechanical
The continuing motion, often repetitive and periodic, of parts of machines and structures.			
7546	pennyweight	Law	Mechanical
A unit of mass equal to 1/20 troy ounce or to 1.55517384 grams; the term is employed in the United States and in England for the valuation of silver, gold, and jewels. Abbreviated dwt; pwt.			
873	kinematics	Law	Mechanical
The study of the motion of a system of material particles without reference to the forces which act on the system.			
11376	Chapman-Jouguet plane	Law	Mechanical
A hypothetical, infinite plane, behind the initial shock front, in which it is variously assumed that reaction (and energy release) has effectively been completed, that reaction product gases have reached thermodynamic equilibrium, and that reaction gases, streaming backward out of the detonation, have reached such a condition that a forward-moving sound wave located at this precise plane would remain a fixed distance behind the initial shock.			
2336	friction damping	Law	Mechanical
The conversion of the mechanical vibrational energy of solids into heat energy by causing one dry member to slide on another.			
866	particle mechanics	Law	Mechanical
The study of the motion of a single material particle.			
10	mass units	Law	Mechanical

Units of measurement having to do with masses of materials, such as pounds or grams.

8097      inertia tensor      Law      Mechanical

A tensor associated with a rigid body whose product with the body's rotation vector yields the body's angular momentum.  
inert primer

830      avoirdupois weight      Law      Mechanical

The system of units which has been commonly used in Englishspeaking countries for measurement of the mass of any substance except precious stones, precious metals, and drugs; it is based on the pound (approximately 453.6 grams) and includes the short ton (2000 pounds), long ton (2240 pounds), ounce (one-sixteenth pound), and dram (onesixteenth

8056      Betti reciprocal theorem      Law      Mechanical

A theorem in the mathematical theory of elasticity which states that if an elastic body is subjected to two systems of surface and body forces, then the work that would be done by the first system acting through the displacements resulting from 60 bifilar electrometer the second system equals the work that would be done by the second system acting through the displacements resulting from the first system.

8055      stress concentration factor      Law      Mechanical

A theoretical factor  $K_t$  expressing the ratio of the greatest stress in the region of stress concentration to the corresponding nominal stress.

1619      ballistic limit      Law      Mechanical

The minimum velocity at which a particular armor-piercing projectile is expected to consistently and completely penetrate armor plate of given thickness and physical properties at a specified angle of obliquity.

2248      level measurement      Law      Mechanical

The determination of the linear vertical distance between a reference point or datum plane and the surface of a liquid or the top of a pile of divided solid.

805      finite strain theory      Law      Mechanical

A theory of elasticity, appropriate for high compressions, in which it is not assumed that strains are infinitesimally small. Also known as finite elasticity theory. Fink truss

2264      generalized velocity      Law      Mechanical

The derivative with respect to time of one of the generalized coordinates of a particle. Also known as Lagrangian generalized velocity.

8049      Hamilton-Jacobi theory      Law      Mechanical



A theory that provides a means for discussing the motion of a dynamic system in terms of a single partial differential equation of the first order, the Hamilton- Jacobi equation.

13619 penetration ballistics Law Mechanical

A branch of terminal ballistics concerned with the motion and behavior of a missile during and after penetrating a target.

839 environmental stress cracking Law Mechanical

The susceptibility of a material to crack or craze in the presence of surface-active agents or other environmental test

2305 deflection curve Law Mechanical

The curve, generally downward, described by a shot deviating from its true course.

10532 substitution weighing Law Mechanical

A method of weighing to allow for differences in lengths of the balance arms, in which the object to be weighed is first balanced against a counterpoise, and the known weights needed to balance the same counterpoise are then determined. Also known as counterpoise method.

2304 elastic curve Law Mechanical

The curved shape of the longitudinal centroidal surface of a beam when the transverse loads acting on it produced wholly elastic stresses.

867 elastodynamics Law Mechanical

The study of the mechanical properties of elastic waves.

2272 mechanical hysteresis Law Mechanical

The dependence of the strain of a material not only on the instantaneous value of the stress but also on the previous history of the stress; for example, the elongation is less at a given value of tension when the tension is increasing than when it is decreasing.

869 aeroballistics Law Mechanical

The study of the interaction of projectiles or high-speed vehicles with the atmosphere.

870 particle dynamics Law Mechanical

The study of the dependence of the motion of a single material particle on the external forces acting upon it, particularly electromagnetic and gravitational forces. particle energy

10533 double weighing Law Mechanical

A method of weighing to allow for differences in lengths of the balance arms, in which object and weights are balanced

twice, the second time with their positions interchanged.

2279      elastic aftereffect      Law      Mechanical

The delay of certain substances in regaining their original shape after being deformed within their elastic limits. Also known as elastic lag.

229      aeroelasticity      Law      Mechanical

The deformation of structurally elastic bodies in response to aerodynamic loads.

1362      metarheology      Law      Mechanical

A branch of rheology whose approach is intermediate between those of macrorheology and microrheology; certain processes that are not isothermal are taken into consideration, such as kinetic elasticity, surface tension, and rate processes.

2292      bearing strain      Law      Mechanical

The deformation of bearing parts subjected to a load.

2293      ballistic deflection      Law      Mechanical

The deflection of a missile due to its ballistic characteristics.

2295      coefficient of compressibility      Law      Mechanical

The decrease in volume per unit volume of a substance resulting from a unit increase in pressure; it is the reciprocal of the bulk modulus.

1610      Routh's rule of inertia      Law      Mechanical

The moment of inertia of a body about an axis of symmetry equals  $M(a^2 + b^2)/n$ , where  $M$  is the body's mass,  $a$  and  $b$  are the lengths of the body's two other perpendicular semiaxes, and  $n$  equals 3, 4, or 5 depending on whether the body is a rectangular parallelepiped, elliptic cylinder, or ellipsoid, respectively.

1382      d'Alembert's principle      Law      Mechanical

The principle that the resultant of the external forces and the kinetic reaction acting on a body equals zero.

855      moment of force      Law      Mechanical

The sum of the products formed by multiplying the mass (or sometimes, the area) of each element of a figure by the square of its distance from a specified line. Also known as rotational inertia.

7562      hectometer      Law      Mechanical

A unit of length equal to 100 meters. Abbreviated hm.

2359	coefficient of restitution	Law	Mechanical
The constant $e$ , which is the ratio of the relative velocity of two elastic spheres after direct impact to that before impact; $e$ can vary from 0 to 1, with 1 equivalent to an elastic collision and 0 equivalent to a perfectly elastic collision. Also known as restitution coefficient.			
7574	tondal	Law	Mechanical
A unit of force equal to the force which will impart an acceleration of 1 foot per second to a mass of 1 long ton; equal to approximately 309.6911 newtons.			
2357	gravitational constant	Law	Mechanical
The constant of proportionality in Newton's law of gravitation, equal to the gravitational force between any two particles times the square of the distance between them, divided by the product of their masses. Also known as constant of gravitation.			
7572	poundal	Law	Mechanical
A unit of force in the British absolute system of units equal to the force which will impart an acceleration of 1 ft/s <sup>2</sup> to a pound mass, or to 0.138254954376 newton.			
757	gram-force	Law	Mechanical
A unit of force in the centimeter-			
2373	elastic equilibrium	Law	Mechanical
The condition of an elastic body in which each volume element of the body is in equilibrium under the combined effect of elastic stresses and externally applied body forces.			
879	nonrelativistic kinematics	Law	Mechanical
The study of motions of systems of objects at speeds which are small compared to the speed of light, without reference to the forces which act on the system. nonrelativistic mechanics			
894	flow curve	Law	Mechanical
The stress-strain curve of a plastic material.			
686	joule	Law	Mechanical
The unit of energy or work in the meter-kilogram-second system of units, equal to the work done by a force of 1 newton magnitude when the point at which the force is applied is displaced 1 meter in the direction of the force.			
13827	windage	Law	Mechanical

1.The deflection of a bullet or other projectile due to wind. 2. The correction made for such deflection.

895      safe load      Law      Mechanical

The stress, usually expressed in tons per square foot, which a soil or foundation can safely support.

13836      land measure      Law      Mechanical

1. Units of area used in measuring land. 2. Any system for measuring land.

7576      tsi      Law      Mechanical

A unit of force equal to 1 ton-force per square inch; equal to approximately  $1.54444 \times 10^7$  pascals.

7563      cape foot      Law      Mechanical

A unit of length equal to 1.033 feet or to 0.3148584 meter.

7575      ounceal      Law      Mechanical

A unit of force equal to the force which will impart an acceleration of 1 foot per second per second to a mass of 1 ounce; equal to 0.0086409346485 newton.

756      nautical chain      Law      Mechanical

A unit of length equal to 15 feet or 4.572 meters.

7560      league      Law      Mechanical

A unit of length equal to 3 miles or 4828.032 meters.

7559      nanometer      Law      Mechanical

A unit of length equal to one-billionth of a meter, or  $10^{-9}$  meter. Also known as millimicron (l<sub>jim</sub>); nanon.

7558      microangstrom      Law      Mechanical

A unit of length equal to one-millionth of an angstrom, or  $10^{-16}$  meter Abbreviated JJLA microbalance

7557      millimeter      Law      Mechanical

A unit of length equal to one-thousandth of a meter. Abbreviated mm. Also known as metric line; strich.

7556      inch      Law      Mechanical

A unit of length in common use in the United States and the United Kingdom, equal to 1/12 foot or 2.54 centimeters.

Abbreviated in.

7555      mile      Law      Mechanical

A unit of length in common use in the United States, equal to 5280 feet, or 1609.344 meters. Abbreviated mi. Also known

as land mile; statute mile.

7554	decameter	Law	Mechanical
------	-----------	-----	------------

A unit of length in the metric system equal to 10 meters.

7553	stigma	Law	Mechanical
------	--------	-----	------------

A unit of length used mainly in nuclear measurements, equal to  $10^{-12}$  meter.

7552	french	Law	Mechanical
------	--------	-----	------------

A unit of length used to measure small diameters, especially those of fiber optic bundles, equal to 1/3 millimeter.

755	angstrom	Law	Mechanical
-----	----------	-----	------------

A unit of length,  $10^{-10}$  meter, used primarily to express wavelengths of optical spectra. Abbreviated Å; Also known as tenthmeter.

7550	furlong	Law	Mechanical
------	---------	-----	------------

A unit of length, equal to 1/8 mile, 660 feet, or 201.168 meters.

7549	femtometer	Law	Mechanical
------	------------	-----	------------

A unit of length, equal to  $10^{-15}$  meter; used particularly in measuring nuclear distances. Abbreviated fm. Also known as fermi.

7564	centimeter	Law	Mechanical
------	------------	-----	------------

A unit of length equal to 0.01 meter. Abbreviated cm.

7596	leo	Law	Mechanical
------	-----	-----	------------

A unit of acceleration, equal to 10 meters per second per second; it has rarely been employed.

2363	body cone	Law	Mechanical
------	-----------	-----	------------

The cone in a rigid body that is swept out by the body's instantaneous axis of rotation during Poincaré motion. Also known as polhode cone.

2366	dynamic balance	Law	Mechanical
------	-----------------	-----	------------

The condition which exists in a rotating body when the axis about which it is forced to rotate, or to which reference is made, is parallel with a principal axis of inertia; no products of inertia about the center of gravity of the body exist in relation to the selected rotational axis.

138	Saint Venant's principle	Law	Mechanical
-----	--------------------------	-----	------------

The principle that the strains that result from application, to a small part of a body's surface, of a system of forces that are

statically equivalent to zero force and zero torque become negligible at distances which are large compared with the dimensions of the part.

7635      pressure      Law      Mechanical

A type of stress which is exerted uniformly in all directions; its measure is the force exerted per unit area.

237      dynamic equilibrium      Law      Mechanical

The condition of any mechanical system when the kinetic reaction is regarded as a force, so that the resultant force on the system is zero according to d'Alembert's principle. Also known as kinetic equilibrium.

682      gram      Law      Mechanical

The unit of mass in the centimeter-

761      circular mil      Law      Mechanical

A unit equal to the area of a circle whose diameter is 1 mil (0.001 inch); used chiefly in specifying cross-sectional areas of round conductors. Abbreviated cir mil.

7606      pull strength      Law      Mechanical

A unit in tensile testing; the bond strength in pounds per square inch.

7600      ata      Law      Mechanical

A unit of absolute pressure in the metric technical system equal to 1 technical atmosphere.

1380      law of corresponding times      Law      Mechanical

The principle that the times for corresponding motions of dynamically similar systems are proportional to  $L/V$  and also to  $J(L/G)$ , where  $L$  is a typical dimension of the system,  $V$  a typical velocity, and  $G$  a typical force per unit mass.

7573      kilogram force      Law      Mechanical

A unit of force equal to the weight of a 1-kilogram mass at a point on the earth's surface where the acceleration of gravity is 9.80665 m/s<sup>2</sup>. Abbreviated kgf. Also known as kilogram (kg); kilogram weight (kg-wt).

7597      celo      Law      Mechanical

A unit of acceleration equal to the acceleration of a body whose velocity changes uniformly by 1 foot (0.3048 meter) per second in 1 second.

7577      crinal      Law      Mechanical

A unit of force equal to 0.1 newton. cripple

7595      hectare      Law      Mechanical

A unit of area in the metric system equal to 100 ares or 10,000 square meters. Abbreviated ha.

10609      Holzer's method      Law      Mechanical

A method of determining the shapes and frequencies of the torsional modes of vibration of a system, in which one imagines the system to consist of a number of flywheels on a massless flexible shaft and, starting with a trial frequency and motion for one flywheel, determines the torques and motions of successive flywheels.

7593      rood      Law      Mechanical

A unit of area, equal to 1/4 acre, or 10,890 square feet, or 1011.7141056 square meters.

7592      acre      Law      Mechanical

A unit of area, equal to 43,560 square feet, or to 4046.8564224 square meters.

878      astrobballistics      Law      Mechanical

The study of phenomena arising out of the motion of a solid through a gas at speeds high enough to cause ablation; for example, the interaction of a meteoroid with the atmosphere.

759      are      Law      Mechanical

A unit of area, used mainly in agriculture, equal to 100 square meters.

7590      anker      Law      Mechanical

A unit of capacity equal to 10 U.S.

7594      deciare      Law      Mechanical

A unit of area, equal to 0.1 are or 10 square meters.

875      gyro dynamics      Law      Mechanical

The study of rotating bodies, especially those subject to precession. gyropendulum

7598      milligal      Law      Mechanical

A unit of acceleration commonly used in geodetic measurements, equal to 10<sup>-3</sup> galileo, or 10<sup>-5</sup> meter per second per second.

7583      gram-centimeter      Law      Mechanical

A unit of energy in the centimeter-gram-second gravitational system, equal to the work done by a force of magnitude 1 gram force when the point at which the force is applied is displaced 1 centimeter in the direction of the force. Abbreviated g-cm.

13813      kip      Law      Mechanical

A 1000-pound (453.6-kilogram) load.

1415	centrifugal force	Prime Effect	Mechanical
------	-------------------	--------------	------------

1. An outward pseudo-force, in a reference frame that is rotating with respect to an inertial reference frame, which is equal and opposite to the centripetal force that must act on a particle stationary in the rotating frame. 2. The reaction force to a centripetal force.

3135	dry friction	Prime Effect	Mechanical
------	--------------	--------------	------------

Resistance between two dry solid surfaces, that is, surfaces free from contaminating films or fluids.

## Mechanical Engineering

3467	air-suspension system	Effect	Mechanical Engineering
------	-----------------------	--------	------------------------

Parts of an automotive vehicle that are intermediate between the wheels and the frame, and support the car body and frame by means of a cushion of air to absorb road shock caused by passage of the wheels over irregularities.

2993	turning	Effect	Mechanical Engineering
------	---------	--------	------------------------

Shaping a member on a lathe.

12632	Saunders air-lift pump	Effect	Mechanical Engineering
-------	------------------------	--------	------------------------

A device for raising water from a well by the introduction of compressed air below the water level in the well. sauterelle

12557	adsorption system	Effect	Mechanical Engineering
-------	-------------------	--------	------------------------

A device that dehumidifies air by bringing it into contact with a solid adsorbing substance.

3449	electromechanical	Effect	Mechanical Engineering
------	-------------------	--------	------------------------

Pertaining to a mechanical device, system, or process which is electrostatically or electromagnetically actuated or controlled.

12669	agitator	Effect	Mechanical Engineering
-------	----------	--------	------------------------

A device for keeping liquids and solids in liquids in motion by mixing, stirring, or shaking.

12583	Lilly controller	Effect	Mechanical Engineering
-------	------------------	--------	------------------------

A device on steam and electric winding engines that protects against overspeed, overwind, and other incidents injurious to workers and the engine.

12620	steam dryer	Effect	Mechanical Engineering
-------	-------------	--------	------------------------

A device for separating liquid from vapor in a steam supply system. steam emulsion test



2942	closed-belt conveyor	Effect	Mechanical Engineering
Solidsconveying device with zipperlike teeth that mesh to form a closed tube wrapped snugly around the conveyed material; used with fragile materials.			
12986	flight conveyor	Effect	Mechanical Engineering
A conveyor in which paddles, attached to single or double strands of chain, drag or push pulverized or granulated solid materials along a trough. Also known as drag conveyor.			
2275	fuel injection	Effect	Mechanical Engineering
The delivery of fuel to an internal combustion engine cylinder by pressure from a mechanical pump.			
1298	accordion roller conveyor	Effect	Mechanical Engineering
A conveyor with a flexible latticed frame which permits variation in length.			
2887	live steam	Effect	Mechanical Engineering
Steam that is being delivered directly from a boiler under full pressure. Livingstone sphere			
12905	Blake jaw crusher	Effect	Mechanical Engineering
A crusher with one fixed jaw plate and one pivoted at the top so as to give the greatest movement on the smallest lump.			
13206	electrolytic grinding	Effect	Mechanical Engineering
A combined grinding and machining operation in which the abrasive, cathodic grinding wheel is in contact with the anodic workpiece beneath the surface of an electrolyte. Also known as electrochemical grinding.			
233	refrigeration	Effect	Mechanical Engineering
The cooling of a space or substance below the environmental temperature.			
294	rotary crusher	Effect	Mechanical Engineering
Solids-reduction device in which a high-speed rotating cone on a vertical shaft forces solids against a surrounding shell.			
2332	compression refrigeration	Effect	Mechanical Engineering
The cooling of a gaseous refrigerant by first compressing it to liquid form (with resultant heat buildup), cooling the liquid by heat exchange, then releasing pressure to allow the liquid to vaporize (with resultant absorption of latent heat of vaporization and a refrigerative effect).			
2943	oscillating screen	Effect	Mechanical Engineering
Solids separator in which the sifting screen oscillates at 300 to 400 revolutions per minute in a plane parallel to the screen.			
2944	pin-type mill	Effect	Mechanical Engineering

Solids pulverizer in which protruding pins on high-speed rotating disk provide the breaking energy.

2946      sawtooth crusher      Effect      Mechanical Engineering

Solids crusher in which feed is broken down between two sawtoothed shafts rotating at different speeds. sawtooth

13209      cascade system      Effect      Mechanical Engineering

A combination of two or more refrigeration systems connected in series to produce extremely low temperatures, with the evaporator of one machine used to cool the condenser of another.

2970      dispersion mill      Effect      Mechanical Engineering

Size-reduction apparatus that disrupts clusters or agglomerates of solids, rather than breaking down individual particles; used for paint pigments, food products, and cosmetics.

12982      pneumatic conveyor      Effect      Mechanical Engineering

A conveyor which transports dry, free-flowing, granular material in suspension, or a cylindrical carrier, within a pipe or duct by means of a high-velocity airstream or by pressure of vacuum generated by an air compressor. Also known as air conveyor.

2940      pan crusher      Effect      Mechanical Engineering

Solids-reduction device in which one or more grinding wheels or mullers revolve in a pan containing the material to be pulverized.

2784      mechanism      Effect      Mechanical Engineering

That part of a machine which contains two or more pieces so arranged that the motion of one compels the motion of the others.

14284      centrifuge      Effect      Mechanical Engineering

1. A rotating device for separating liquids of different specific gravities or for separating suspended colloidal particles, such as clay particles in an aqueous suspension, according to particle-size fractions by centrifugal force. 2. A large motor-driven apparatus with a long arm, at the end of which human and animal subjects or equipment can be revolved 95 centrifuge refining and rotated at various speeds to simulate the prolonged accelerations encountered in rockets and

12967      adamantite drill      Effect      Mechanical Engineering

A core drill with hardened steel shot pellets that revolve under the rim of the rotating tube; employed in rotary drilling in very hard ground.

2564      shock isolation      Effect      Mechanical Engineering

The application of isolators to alleviate the effects of shock on a mechanical device or system.

2569      electromachining      Effect      Mechanical Engineering

The application of electric or ultrasonic energy to a workpiece to effect removal of material.

2425      abrasive blasting      Effect      Mechanical Engineering

The cleaning or finishing of surfaces by the use of an abrasive entrained in a blast of air.

12944      ratchet coupling      Effect      Mechanical Engineering

A coupling between two shafts that uses a ratchet to allow the driven shaft to be turned in one direction only, and also to permit the driven shaft to overrun the driving shaft.

2299      hydraulic cylinder      Effect      Mechanical Engineering

The cylindrical chamber of a positive displacement pump.

2776      journal      Effect      Mechanical Engineering

That part of a shaft or crank which is supported by and turns in a bearing.

298      fleet      Effect      Mechanical Engineering

Sidewise movement of a rope or cable when winding on a drum.

2346      attemperation of steam      Effect      Mechanical Engineering

The controlled cooling, in a steam boiler, of steam at the superheater outlet or between the primary and secondary stages of the superheater to regulate the final steam temperature.

2340      ocean thermal-energy conversion      Effect      Mechanical Engineering

The conversion of energy arising from the temperature difference between warm surface water of oceans and cold deep-ocean current into electrical energy or other useful forms of energy.

2338      solar heating      Effect      Mechanical Engineering

The conversion of solar radiation into heat for technological, comfort-

2337      solar power      Effect      Mechanical Engineering

The conversion of the energy of the sun's radiation to useful work. solar power satellite

12906      roll crusher      Effect      Mechanical Engineering

A crusher having one or two toothed rollers to reduce the material.

2333      aftercooling      Effect      Mechanical Engineering

The cooling of a gas after its compression.

2764	ballhead	Effect	Mechanical Engineering
------	----------	--------	------------------------

That part of the governor which contains flyweights whose force is balanced, at least in part, by the force of compression of a speeder spring.

1875	driving pinion	Effect	Mechanical Engineering
------	----------------	--------	------------------------

The input gear in the differential of an automobile.

12995	screw conveyor	Effect	Mechanical Engineering
-------	----------------	--------	------------------------

A conveyor consisting of a helical screw that rotates upon a single shaft within a stationary trough or casing, and which can move bulk material along a horizontal, inclined, or vertical plane. Also known as auger conveyor; spiral conveyor; worm conveyor.

3288	turbine propulsion	Effect	Mechanical Engineering
------	--------------------	--------	------------------------

Propulsion of a vehicle or vessel by means of a steam or gas turbine.

12742	reaction wheel	Effect	Mechanical Engineering
-------	----------------	--------	------------------------

A device capable of storing angular momentum which may be used in a space ship to provide torque to effect or maintain a given orientation.

12740	Atwood machine	Effect	Mechanical Engineering
-------	----------------	--------	------------------------

A device comprising a pulley over which is passed a stretchfree cord with a weight hanging on each end.

1940	suction lift	Effect	Mechanical Engineering
------	--------------	--------	------------------------

The head, in feet, that a pump must provide on the inlet side to raise the liquid from the supply well to the level of the pump. Also known as suction head.

12997	flat-belt conveyor	Effect	Mechanical Engineering
-------	--------------------	--------	------------------------

A conveyor belt in which the carrying run is supported by flatbelt idlers or pulleys.

12985	drag-chain conveyor	Effect	Mechanical Engineering
-------	---------------------	--------	------------------------

A conveyor in which the open links of a chain drag material along the bottom of a hard-faced concrete or cast iron trough. Also known as dragline conveyor. drag classifier

13037	eddy-current brake	Effect	Mechanical Engineering
-------	--------------------	--------	------------------------

A control device or dynamometer for regulating rotational speed, as of flywheels, in which energy is converted by eddy currents into heat.

3275	cage mill	Effect	Mechanical Engineering
Pulverizer used to disintegrate clay, press cake, asbestos, packing-house by-products, and various tough, gummy, highmoisture- content or low-melting-point materials.			
13064	sprocket chain	Effect	Mechanical Engineering
A continuous chain which meshes with the teeth of a sprocket and thus can transmit mechanical power from one sprocket to another.			
463	valve train	Effect	Mechanical Engineering
The valves and valve operating mechanism for the control of fluid flow to and from a piston-cylinder machine, for example, steam, diesel, or gasoline engine.			
1847	accelerator jet	Effect	Mechanical Engineering
The jet through which the fuel is injected into the incoming air in the carburetor of an automotive vehicle with rapid demand for increased power output.			
12704	Lanchester balancer	Effect	Mechanical Engineering
A device for balancing four-cylinder engines; consists of two meshed gears with eccentric masses, driven by the			
338	pumping loss	Effect	Mechanical Engineering
Power consumed in purging a cylinder of exhaust gas and sucking in fresh air instead.			
1270	torque converter	Effect	Mechanical Engineering
A device for changing the torque speed or mechanical advantage between an input shaft and an output shaft.			
1530	thrust yoke	Effect	Mechanical Engineering
The part connecting the piston rods of the feed mechanism on a hydraulically driven diamond-drill swivel head to the thrust block, which forms the connecting link between the yoke and the drive rod, by means of which link the longitudinal movements of the feed mechanism are transmitted to the swivel-head drive rod. Also known as back end.			
12862	trepanning tool	Effect	Mechanical Engineering
A cutting tool in the form of a circular tube, having teeth on the end; the workpiece or tube, or both, are rotated and the tube is fed axially into the workpiece, leaving behind a narrow grooved surface in the workpiece.			
3414	expansion engine	Effect	Mechanical Engineering
Piston-cylinder device that cools compressed air via sudden expansion; used in production of pure gaseous oxygen via the Claude cycle.			

2992	stretch forming	Effect	Mechanical Engineering
Shaping metals and plastics by applying tension to stretch the heated sheet or part, wrapping it around a die, and then cooling it. Also known as wrap forming. stretch out			
3003	shearing	Effect	Mechanical Engineering
Separation of material by the cutting action of shears.			
2159	pawl	Effect	Mechanical Engineering
The driving link or holding link of a ratchet mechanism, permits motion in one direction only.			
13216	epicyclic train	Effect	Mechanical Engineering
A combination of epicyclic gears, usually connected by an arm, in which some or all of the gears have a motion compounded of rotation about an axis and a translation or revolution of that axis.			
13205	Humphrey gas pump	Effect	Mechanical Engineering
A combined internal combustion engine and pump in which the metal piston has been replaced by a column of water.			
12993	rope-and-button conveyor	Effect	Mechanical Engineering
A conveyor consisting of an endless wire rope or cable with disks or buttons attached at intervals.			
3178	absorption refrigeration	Effect	Mechanical Engineering
Refrigeration in which cooling is effected by the expansion of liquid ammonia into gas and absorption of the gas by water; the ammonia is reused after the water evaporates.			
12988	arm conveyor	Effect	Mechanical Engineering
A conveyor in the form of an endless belt or chain to which are attached projecting arms or shelves which carry the materials.			
2069	feed screw	Effect	Mechanical Engineering
The externally threaded drill-rod drive rod in a screw- or gearfeed swivel head on a diamond drill; also used on percussion drills, lathes, and other machinery.			
12987	Redler conveyor	Effect	Mechanical Engineering
A conveyor in which material is dragged through a duct by skeletonized or U-shaped impellers which move the material in which they are submerged because the resistance to slip through the element is greater than the drag against the walls of the duct.			
1285	hydrocyclone	Effect	Mechanical Engineering

A cyclone separator in which granular solids are removed from a stream of water and classified by centrifugal force.

12838    rotary dryer    Effect    Mechanical Engineering

A cylindrical furnace slightly inclined to the horizontal and rotated on suitable bearings; moisture is removed by rising hot gases.

12825    Lancashire boiler    Effect    Mechanical Engineering

A cylindrical steam boiler consisting of two longitudinal furnace tubes which have internal grates at the front.

12777    guy derrick    Effect    Mechanical Engineering

A derrick having a vertical pole supported by guy ropes to which a boom is attached by rope or cable suspension at the top and by a pivot at the foot.

297    disk mill    Effect    Mechanical Engineering

Size-reduction apparatus in which grinding of feed solids takes place between two disks, either or both of which rotate. Also known as disk attrition mill.

2093    herringbone gear    Effect    Mechanical Engineering

The equivalent of two helical gears of opposite hand placed side by side.

13165    superheater    Effect    Mechanical Engineering

A component of a steam-generating unit in which steam, after it has left the boiler drum, is heated above its saturation temperature.

11633    Gates crusher    Effect    Mechanical Engineering

A gyratory crusher which has a cone or mantle that is moved eccentrically by the lower bearing sleeve.

8537    Robins-Messiter system    Effect    Mechanical Engineering

A stacking conveyor system in which material arrives on a conveyor belt and is fed to one or two wing conveyors.

670    available draft    Effect    Mechanical Engineering

The usable differential pressure in the combustion air in a furnace, used to sustain combustion of fuel or to transport products of combustion.

8499    uniflow engine    Effect    Mechanical Engineering

A steam engine in which steam enters the cylinder through valves at one end and escapes through openings uncovered by the piston as it completes its stroke.

8496    Parsons-stage steam turbine    Effect    Mechanical Engineering

A steam turbine having a reaction-type stage in which the pressure drop occurs partially across the stationary nozzles and partly across the rotating blades.

8495      helical-flow turbine      Effect      Mechanical Engineering

A steam turbine in which the steam is directed tangentially and radially inward by nozzles against buckets milled in the wheel rim; the steam flows in a helical path, reentering the buckets one or more times. Also known as tangential helical-flow turbine.

8425      steam nozzle      Effect      Mechanical Engineering

A streamlined flow structure in which heat energy of steam is converted to the kinetic form.

8424      needle nozzle      Effect      Mechanical Engineering

A streamlined hydraulic turbine nozzle with a movable element for converting the pressure and kinetic energy in the pipe leading from the reservoir to the turbine into a smooth jet of variable diameter and discharge but practically constant velocity.

665      forced circulation      Effect      Mechanical Engineering

The use of a pump or other fluid-movement device in conjunction with liquid-processing equipment to move the liquid through pipes and process vessels; contrasted to gravity or thermal circulation. forced-circulation boiler

1354      friction sawing      Effect      Mechanical Engineering

A burning process to cut stock to length by using a blade saw operating at high speed; used especially for the structural parts of mild steel and stainless steel. friction shoe

859      dual-bed dehumidifier      Effect      Mechanical Engineering

A sorbent dehumidifier with two beds, one bed dehumidifying while the other bed is reactivating, thus providing a continuous flow of air.

13198      Philips hot-air engine      Effect      Mechanical Engineering

A compact hot-air engine that is a Philips Research Lab (Holland) design; it uses only one cylinder and piston, and operates at 3000 revolutions per minute, with hot-chamber temperature of 1200°F (650°C), maximum pressure of 50 atmospheres (5.07 megapascals), and mean effective pressure of 14 atmospheres (1.42 megapascals).

8612      friction bearing      Effect      Mechanical Engineering

A solid bearing that directly contacts and supports an axle end.

804      electromechanics      Effect      Mechanical Engineering



The technology of mechanical devices, systems, or processes which are electrostatically or electromagnetically actuated or controlled.

8242      rope drive      Effect      Mechanical Engineering

A system of ropes running in grooved pulleys or sheaves to transmit power over distances too great for belt drives.

13153      vacuum pump      Effect      Mechanical Engineering

A compressor for exhausting air and noncondensable gases from a space that is to be maintained at subatmospheric pressure.

8133      impact grinding      Effect      Mechanical Engineering

A technique used to break up particles by direct fall of crushing bodies on them.

819      rifling      Effect      Mechanical Engineering

The technique of cutting helical grooves inside a rifle barrel to impart a spinning motion to a projectile around its long axis.

159      gear drive      Effect      Mechanical Engineering

Transmission of motion geared turbine or torque from one shaft to another by means of direct contact between toothed wheels. geared turbine

804      steam engine      Effect      Mechanical Engineering

A thermodynamic device for the conversion of heat in steam into work, generally in the form of a positive displacement, piston and cylinder mechanism.

11404      bicycle      Effect      Mechanical Engineering

A human-powered land vehicle with two wheels, one behind the other, usually propelled by the action of the rider's feet on the pedals.

11413      ram-type turret lathe      Effect      Mechanical Engineering

A horizontal turret lathe in which the turret is mounted on a ram or slide which rides on a saddle.

11427      Dorr classifier      Effect      Mechanical Engineering

A horizontal flow classifier consisting of a rectangular tank with a sloping bottom, a rake mechanism for moving sands uphill along the bottom, an inlet for feed, and outlets for sand and slime.

13590      involute spline broach      Effect      Mechanical Engineering

A broach that cuts multiple keys in the form of internal or external involute gear teeth.

8765      pole lathe      Effect      Mechanical Engineering

A simple lathe in which the work is rotated by a cord attached to a treadle.

8996      counterweight      Effect      Mechanical Engineering

1. A device which counterbalances the original load in elevators and skip and mine hoists, going up when the load goes down, so that the engine must only drive against the unbalanced load and overcome friction. 2. Any weight placed on a mechanism which is out of balance so as to maintain static equilibrium. Also known as counterbalance; counterpoise.

11214      scissor jack      Effect      Mechanical Engineering

A lifting jack driven by a horizontal screw; the linkages of the jack are parallelograms whose horizontal diagonals are lengthened or shortened by the screw.

8876      opposed engine      Effect      Mechanical Engineering

A reciprocating engine having the pistons on opposite sides of the crankshaft, with the piston strokes on each side working in a direction opposite to the direction of the strokes on the other side.

8875      two-cycle engine      Effect      Mechanical Engineering

A reciprocating internal combustion engine that requires two piston strokes or one revolution to complete a cycle.

887      hydropneumatic recoil system      Effect      Mechanical Engineering

A recoil mechanism that absorbs the energy of recoil by the forcing of oil through orifices and returns the gun to battery by compressed gas.

8870      Schneider recoil system      Effect      Mechanical Engineering

A recoil system for artillery, employing the hydropneumatic principle without a floating piston.

13486      downdraft carburetor      Effect      Mechanical Engineering

A carburetor in which the fuel is fed into a downward current of air.

145      sliding pair      Effect      Mechanical Engineering

Two adjacent links, one of which is constrained to move in a particular path with respect to the other; the lower, or closed, pair is completely constrained by the design of the links of the pair.

11218      walking beam      Effect      Mechanical Engineering

A lever that oscillates on a pivot and transmits power in a manner producing a reciprocating or reversible motion; used in rock drilling and oil well pumping.

883      shear spinning      Effect      Mechanical Engineering

A sheet-metalforming process which forms parts with rotational symmetry over a mandrel with the use of a tool or roller in

which deformation is carried out with a roller in such a manner that the diameter of the original blank does not change but the thickness of the part decreases by an amount dependent on the mandrel angle.

8574	Rzeppa joint	Effect	Mechanical Engineering
A special application of the Bendix-Weiss universal joint in which four large balls are transmitting elements, while a center ball acts as a spacer; it transmits constant angular velocity through a single universal joint.			
11219	tappet	Effect	Mechanical Engineering
A lever or oscillating member moved by a cam and intended to tap or touch another part, such as a push rod or valve system.			
11470	gin	Effect	Mechanical Engineering
A hoisting machine in the form of a tripod with a windlass, pulleys, and ropes.			
8762	shell pump	Effect	Mechanical Engineering
A simple pump for removing wet sand or mud; consists of a hollow cylinder with a ball or clack valve at the bottom.			
8754	rate integrating gyroscope	Effect	Mechanical Engineering
A single- degree-of-freedom gyro having primarily viscous restraint of its spin axis about the output axis; an output signal is produced by gimbal angular displacement, relative to the base, which reactance drop is proportional to the integral of the angular rate of the base about the input axis.			
13510	poppet valve	Effect	Mechanical Engineering
A cam-operated or spring-loaded reciprocating-engine mushroomtype valve used for control of admission and exhaust of working fluid; the direction of movement is at right angles to the plane of its seat.			
8718	needle valve	Effect	Mechanical Engineering
A slender, pointed rod fitting in a hole or circular or conoidal seat; used in hydraulic turbines and hydroelectric systems.			
8715	slide valve	Effect	Mechanical Engineering
A sliding mechanism to cover and uncover ports for the admission of fluid, as in some steam engines.			
8692	pilot drill	Effect	Mechanical Engineering
A small drill to start a hole to ensure that a larger drill will run true to center.			
1351	rocker cam	Effect	Mechanical Engineering
A cam that moves with a rocking motion.			
13512	inverse cam	Effect	Mechanical Engineering

A cam that acts as a follower instead of a driver.

8617      active solar system      Effect      Mechanical Engineering

A solar heating or cooling system that operates by mechanical means, such as motors, pumps, or valves. active sonar

8616      passive solar system      Effect      Mechanical Engineering

A solar heating or cooling system that operates by using gravity, heat flows, or evaporation rather than mechanical devices to collect and transfer energy. passive sonar

8824      oleo strut      Effect      Mechanical Engineering

A shock absorber consisting of a telescoping cylinder that forces oil into an air chamber, thereby compressing the air; used on aircraft landing gear.

11589      gin pole      Effect      Mechanical Engineering

A hand-operated derrick which has a nearly vertical pole supported by guy ropes; the load is raised on a rope that passes through a pulley at the top and over a winch at the foot. Also known as guyed-mast derrick; pole derrick; standing derrick.

11562      adiabatic engine      Effect      Mechanical Engineering

A heat engine or thermodynamic system in which there is no gain or loss of heat.

13792      floating scraper      Effect      Mechanical Engineering

A balanced scraper blade that rests lightly on a drum filter; removes solids collected on the rotating drum surface by riding on the drum's surface contour.

7648      Unsin engine      Effect      Mechanical Engineering

A type of rotary engine in which the trochoidal rotors of eccentricrotor engines are replaced with two circular rotors, one of which has a single gear tooth upon which gas pressure acts, and the second rotor has a slot which accepts the gear

7646      screw elevator      Effect      Mechanical Engineering

A type of screw conveyor for vertical delivery of pulverized materials. screw fastener See screw.

7645      ribbon conveyor      Effect      Mechanical Engineering

A type of screw conveyor which has an open space between the shaft and a ribbon-shaped flight, used for wet or sticky materials which would otherwise build up on the spindle.

13799      knife-edge bearing      Effect      Mechanical Engineering

A balance beam or lever arm fulcrum in the form of a hardened steel wedge; used to minimize friction.

13152      Roots blower      Effect      Mechanical Engineering

A compressor in which a pair of hourglass-shaped members rotate within a casing to deliver large volumes of gas at relatively low pressure increments.

182      abrasive cloth      Effect      Mechanical Engineering

Tough cloth to whose surface an abrasive such as sand or emery has been bonded for use in grinding or polishing.

7478      feeder-breaker      Effect      Mechanical Engineering

A unit that breaks and feeds ore or crushed rock to a materialshandling system at a required rate.

7477      impact mill      Effect      Mechanical Engineering

A unit that reduces the size of rocks and minerals by the action of rotating blades projecting the material against steel plates.

13314      pendulum saw      Effect      Mechanical Engineering

A circular saw that swings in a vertical arc for crosscuts.

747      constant-velocity universal joint      Effect      Mechanical Engineering

A universal joint that transmits constant angular velocity from the driving to the driven shaft, such as the Bendix-Weiss universal joint.

7704      Telsmith breaker      Effect      Mechanical Engineering

A type of gyratory crusher, often used for primary crushing; consists of a spindle mounted in a long eccentric sleeve which rotates to impart a gyratory motion to the crushing head, but gives a parallel stroke, that is, the axis of the spindle describes a cylinder rather than a cone, as in the suspended spindle gyratory.

3549      planet pinion      Effect      Mechanical Engineering

One of the gears in a planetary gear train that meshes with and revolves around the sun gear.

7437      ball valve      Effect      Mechanical Engineering

A valve in which the fluid flow is regulated by a ball moving relative to a spherical socket as a result of fluid pressure and the weight of the ball.

1159      deadman's handle      Effect      Mechanical Engineering

A handle on a machine designed so that the operator must continuously press on it in order to keep the machine running.

7326      ultrasonic drilling      Effect      Mechanical Engineering

A vibration drilling method in which ultrasonic vibrations are generated by the compression and extension of a core of electrostrictive or magnetostrictive material in a rapidly alternating electric or magnetic field.

11625	rate gyroscope	Effect	Mechanical Engineering
A gyroscope that is suspended in just one gimbal whose bearings form its output axis and which is restrained by a spring; rotation of the gyroscope frame about an axis perpendicular to both spin and output axes produces precession of the gimbal within the bearings proportional to the rate of rotation.			
726	undershot wheel	Effect	Mechanical Engineering
A water wheel operated by the impact of flowing water against blades attached around the periphery of the wheel, the blades being partly or totally submerged in the moving stream of water.			
7205	multirope friction winder	Effect	Mechanical Engineering
A winding system in which the drive to the winding ropes is the frictional resistance between the ropes and the driving sheaves.			
7204	Savonius windmill	Effect	Mechanical Engineering
A windmill composed of two semicylindrical offset cups rotating about a vertical axis.			
7203	Fales-Stuart windmill	Effect	Mechanical Engineering
A windmill developed for farm use from the two-blade airfoil propeller. Also known as Stuart windmill. Falk flexible coupling			
7188	Bowden cable	Effect	Mechanical Engineering
A wire made of spring steel which is enclosed in a helical casing and used to transmit longitudinal motions over distances, particularly around corners.			
7472	Bendix-Weiss universal joint	Effect	Mechanical Engineering
A universal joint that provides for constant angular velocity of the driven shaft by transmitting the torque through a set of four balls lying in the plane that contains the bisector of, and is perpendicular to, the plane of the angle between bend			
11493	cryosorption pump	Effect	Mechanical Engineering
A high-vacuum pump that employs a sorbent such as activated charcoal or synthetic zeolite cooled by nitrogen or some other refrigerant; used to reduce pressure from atmospheric pressure to a few millitorr.			
9026	mechanical linkage	Effect	Mechanical Engineering
A set of rigid bodies, called links, joined together at pivots by means of pins or equivalent devices.			
799	lead screw	Effect	Mechanical Engineering
A threaded shaft used to convert rotation to longitudinal motion; in a lathe it moves the tool carriage when cutting threads; in a disk recorder it guides the cutter at a desired rate across the surface of an ungrooved disk.			

1147	derrick	Effect	Mechanical Engineering
A hoisting machine consisting usually of a vertical mast, a slanted boom, and associated tackle; may be operated mechanically or by hand.			
13640	drum brake	Effect	Mechanical Engineering
A brake in which two curved shoes fitted with heat- and wear-resistant linings are forced against the surface of a rotating drum.			
11475	Chicago boom	Effect	Mechanical Engineering
A hoisting device that is supported on the structure being erected. Chicago caisson			
11476	double-drum hoist	Effect	Mechanical Engineering
A hoisting device consisting of two cable drums which rotate in opposite directions and can be operated separately or together.			
13643	band brake	Effect	Mechanical Engineering
A brake in which the frictional force is applied by increasing the tension in a flexible band to tighten it around the drum.			
790	sun-and-planet motion	Effect	Mechanical Engineering
A train of two wheels moving epicyclically with a small wheel rotating a wheel on the central axis. sun gear See central			
13698	bellows seal	Effect	Mechanical Engineering
A boiler seal in the form of a bellows which prevents leakage of air or gas.			
1370	porcupine boiler	Effect	Mechanical Engineering
A boiler having dead end tubes projecting from a vertical shell. 415 pore diameter pore diameter			
11542	rotary furnace	Effect	Mechanical Engineering
A heat-treating furnace of circular construction which rotates the workpiece around the axis of the furnace during 469 rotary kiln heat treatment; workpieces are transported through the furnace along a circular path.			
11480	clapper box	Effect	Mechanical Engineering
A hinged device that permits a reciprocating cutting tool (as in a planer or shaper) to clear the work on the return stroke.			
11517	spiral gear	Effect	Mechanical Engineering
A helical gear that transmits power from one shaft to another, nonparallel shaft.			
784	cableway	Effect	Mechanical Engineering
A transporting system consisting of a cable extended between two or more points on which cars are propelled to			

transport bulk materials for construction operations.

7823	slope conveyor	Effect	Mechanical Engineering
------	----------------	--------	------------------------

A troughed belt conveyor used for transporting material on steep grades.

11496	vibratory centrifuge	Effect	Mechanical Engineering
-------	----------------------	--------	------------------------

A high-speed rotating device to remove moisture from pulverized coal or other solids.

1376	thrust bearing	Effect	Mechanical Engineering
------	----------------	--------	------------------------

A bearing which 567 thrust load sustains axial loads and prevents axial movement of a loaded shaft.

11497	centrifugal discharge elevator	Effect	Mechanical Engineering
-------	--------------------------------	--------	------------------------

A high-speed bucket elevator from which free-flowing materials are discharged by centrifugal force at the top of the loop.

7767	Brennan monorail car	Effect	Mechanical Engineering
------	----------------------	--------	------------------------

A type of car balanced on a single rail so that when the car starts to tip, a force automatically applied at the axle end is converted gyroscopically into a strong righting moment which forces the car back into a position of lateral equilibrium.

7766	Kauertz engine	Effect	Mechanical Engineering
------	----------------	--------	------------------------

A type of cat-and mouse rotary engine in which the pistons are vanes which are sections of a right circular cylinder; two pistons are attached to one rotor so that they rotate with constant angular velocity, while the other two pistons are controlled by a gear-and-crank mechanism, so that angular velocity varies.

13787	vertical band saw	Effect	Mechanical Engineering
-------	-------------------	--------	------------------------

A band saw whose blade operates in the vertical plane; ideal for contour cutting.

7747	zipper conveyor	Effect	Mechanical Engineering
------	-----------------	--------	------------------------

A type of conveyor belt with zipperlike teeth that mesh to form a closed tube; used to handle fragile materials. zirconium oxide-based oxygen transducer

7716	Scotch yoke	Effect	Mechanical Engineering
------	-------------	--------	------------------------

A type of four-bar Scott connection linkage; it is employed to convert a steady rotation into a simple harmonic motion.

11467	crane	Effect	Mechanical Engineering
-------	-------	--------	------------------------

A hoisting machine with a power-operated inclined or horizontal boom and lifting tackle for moving loads vertically and horizontally.

13705	steam superheater	Effect	Mechanical Engineering
-------	-------------------	--------	------------------------

A boiler component in which sensible heat is added to the steam after it has been evaporated from the liquid phase.



1093	dragline scraper	Effect	Mechanical Engineering
A machine with a flat, plowlike blade or partially open bucket pulled on rope for withdrawing piled material, such as stone or coal, from a stockyard to the loading platform; the empty bucket is subsequently returned to the pile of material by means of a return rope.			
9987	four-bar linkage	Effect	Mechanical Engineering
A plane linkage consisting of four links pinned tail to head in a closed loop with lower, or closed, joints.			
13362	Ross feeder	Effect	Mechanical Engineering
A chute for conveying bulk materials by means of a screen of heavy endless chains hung on a sprocket shaft; rotation of the shaft causes materials to slide.			
9865	rotary engine	Effect	Mechanical Engineering
A positive displacement engine (such as a steam or internal combustion type) in which the thermodynamic cycle is carried out in a mechanism that is entirely rotary and without the more customary structural elements of a reciprocating piston, connecting rods, and crankshaft.			
9863	rotary compressor	Effect	Mechanical Engineering
A positive-displacement machine in which compression of the fluid is effected directly by a rotor and without the usual piston, connecting rod, and crank mechanism of the reciprocating compressor.			
9859	knuckle post	Effect	Mechanical Engineering
A post which acts as the pivot for the steering knuckle in an automobile.			
13437	disk centrifuge	Effect	Mechanical Engineering
A centrifuge with a large bowl having a set of disks that separate the liquid into thin layers to create shallow settling chambers.			
985	fluid drive	Effect	Mechanical Engineering
A power coupling operated on a hydraulic turbine principle in which the engine flywheel has a set of turbine blades which are connected directly to it and which are driven in oil, thereby turning another set of blades attached to the transmission gears of the automobile. Also known as fluid clutch; hydraulic clutch.			
9830	band saw	Effect	Mechanical Engineering
A power-operated woodworking saw consisting basically of a flexible band of steel having teeth on one edge, running over two vertical pulleys, and operated under tension.			
9792	gyratory crusher	Effect	Mechanical Engineering

A primary breaking machine in the form of two cones, an outer fixed cone and a solid inner erect cone mounted on an eccentric bearing. Also known as gyratory breaker.

9788      free-piston engine      Effect      Mechanical Engineering

A prime mover utilizing free-piston motion controlled by gas pressure in the cylinders.

9605      shearing punch      Effect      Mechanical Engineering

A punch that cuts material by shearing it, with minimal crushing effect.

10928      forklift      Effect      Mechanical Engineering

A machine, usually powered by hydraulic means, consisting of two or more prongs which can be raised and lowered and are inserted under heavy materials or objects for hoisting and moving them.

10009      Pohle air lift pump      Effect      Mechanical Engineering

A pistonless pump in which compressed air fills the annular space surrounding the uptake pipe and is free to enter the rising column at all points of its periphery.

765      feed nut      Effect      Mechanical Engineering

The threaded sleeve fitting around the feed screw on a gear-feed drill swivel head, which is rotated by means of paired gears driven from the spindle or feed shaft.

9682      Kaplan turbine      Effect      Mechanical Engineering

A propeller-type hydraulic turbine in which the positions of the runner blades and the wicket gates are adjustable for load change with sustained efficiency.

10968      air compressor      Effect      Mechanical Engineering

A machine that increases the pressure of air by increasing its density and delivering the fluid against the connected system resistance on the discharge side. air-compressorunloader

9649      crossed belt      Effect      Mechanical Engineering

A pulley belt arranged so that the sides cross, thereby making the pulleys rotate in opposite directions.

13439      supercentrifuge      Effect      Mechanical Engineering

A centrifuge built to operate at faster speeds than an ordinary centrifuge.

9636      rod mill      Effect      Mechanical Engineering

A pulverizer operated by the impact of heavy metal rods.

9635      band wheelball mill      Effect      Mechanical Engineering



examined.

1047	buhrstone mill	Effect	Mechanical Engineering
A mill for grinding or pulverizing grain in which a flat siliceous rock (buhrstone), generally of cellular quartz, rotates against a stationary stone of the same material.			
10388	wave motor	Effect	Mechanical Engineering
A motor that depends on the lifting power of sea waves to develop its usable energy.			
700	windup	Effect	Mechanical Engineering
The twisting of a shaft under a torsional load, usually resulting in vibration and other undesirable effects as the shaft			
10342	Walley engine	Effect	Mechanical Engineering
A multirotor engine employing four approximately elliptical rotors that turn in the same clockwise sense, leading to excessively high rubbing velocities.			
10759	underdrive press	Effect	Mechanical Engineering
A mechanical press having the driving mechanism located within or under the bed.			
1000	Hardinge feeder-weigher	Effect	Mechanical Engineering
A pivoted, short belt conveyor which controls the rate of material flow from a hopper by weight per cubic foot.			
10769	Peaucellier linkage	Effect	Mechanical Engineering
A mechanical linkage to convert circular motion exactly into straight-line motion.			
10008	Kullenberg piston corer	Effect	Mechanical Engineering
A pistonoperated coring device used to obtain 2-inchdiameter (5-centimeter) core samples.			
702	gyroscopic couple	Effect	Mechanical Engineering
The turning moment which opposes any change of the inclination of the axis of rotation of a gyroscope.			
708	belt drive	Effect	Mechanical Engineering
The transmission of power between shafts by means of a belt connecting pulleys on the shafts.			
10226	contrarotating propellers	Effect	Mechanical Engineering
A pair of propellers on concentric shafts, turning in opposite directions.			
10179	cam pawl	Effect	Mechanical Engineering
A pawl which prevents a wheel from turning in one direction by a wedging action, while permitting it to rotate in the other			

direction.

13413      elliptic gear      Effect      Mechanical Engineering

A change gear composed of two elliptically shaped gears, each rotating about one of its focal points.

723      fan static pressure      Effect      Mechanical Engineering

The total pressure rise diminished by the velocity pressure in the fan outlet.

730      cooling load      Effect      Mechanical Engineering

The total amount of heat energy that must be removed from a system by a cooling mechanism in a unit time, equal to the rate at which heat is generated by people, machinery, and processes, plus the net flow of heat into the system not associated with the cooling machinery cooling method

13434      roller chain      Effect      Mechanical Engineering

A chain drive assembled from roller links and pin links.

736      combplate      Effect      Mechanical Engineering

The toothed portion of the stationary threshold plate that is set into both ends of an escalator or moving sidewalk and meshes with the grooved surface of the moving steps or treadway combustible loss

10043      planet gear      Effect      Mechanical Engineering

A pinion in a planetary gear train.

10988      jordan      Effect      Mechanical Engineering

A machine or engine used to refine paper pulp, consisting of a rotating cone, with cutters, that fits inside another cone, also with cutters.

10768      cam mechanism      Effect      Mechanical Engineering

A mechanical linkage whose purpose is to produce, by means of a contoured cam surface, a prescribed motion of the output link.

9188      vibroenergy separator      Effect      Mechanical Engineering

A screentype device for classification or separation of grains of solids by a combination of gyratory motion and auxiliary vibration caused by balls bouncing against the lower surface of the screen cloth.

9305      prism joint      Effect      Mechanical Engineering

A robotic articulation that has only one degree of freedom, in sliding motion only.

9278      polishing roll      Effect      Mechanical Engineering

A roll or series of rolls on a plastics mold; has highly polished chrome-plated surfaces; used to produce a smooth surface on a plastic sheet as it is extruded.

9276      troughed roller conveyor      Effect      Mechanical Engineering

A roller conveyor having two rows of rolls set at an angle to form a trough over which objects are conveyed. troughing

9275      squeeze roll      Effect      Mechanical Engineering

A roller designed to exert pressure on material passing between it and a similar roller.

9248      eccentric rotor engine      Effect      Mechanical Engineering

A rotary engine, such as the Wankel engine, wherein motion is imparted to a shaft by a rotor eccentric to the shaft.

9246      swash-plate pump      Effect      Mechanical Engineering

A rotary pump in which the angle between the drive shaft and the plunger-carrying body is varied.

924      screw compressor      Effect      Mechanical Engineering

A rotary-element gas compressor in which compression is accomplished between two intermeshing, counterrotating

9237      drum feeder      Effect      Mechanical Engineering

A rotating drum with vanes or buckets to lift and carry parts and drop them into various orienting or chute arrangements.

Also known as tumbler feeder.

9234      air propeller      Effect      Mechanical Engineering

A rotating fan for moving air.

9230      carousel      Effect      Mechanical Engineering

A rotating transport system that transfers and presents workpieces for loading and unloading by a robot or other machine.

9617      screw pump      Effect      Mechanical Engineering

A pump that raises water by means of helical impellers in the pump casing.

9194      impact screen      Effect      Mechanical Engineering

A screen designed to swing or rock forward when loaded and to stop abruptly by coming in contact with a stop. impact strength

9344      pneumatic riveter      Effect      Mechanical Engineering

A riveting machine having a rapidly reciprocating piston driven by compressed air.

11157      atomizer burner      Effect      Mechanical Engineering



10992	engine	Effect	Mechanical Engineering
-------	--------	--------	------------------------

10994	centrifugal compressor	Effect	Mechanical Engineering
-------	------------------------	--------	------------------------

10996	winch	Effect	Mechanical Engineering
-------	-------	--------	------------------------

10999	lathe	Effect	Mechanical Engineering
-------	-------	--------	------------------------

9553	Ljungstrom steam turbine	Effect	Mechanical Engineering
------	--------------------------	--------	------------------------

11006	centrifugal fan	Effect	Mechanical Engineering
-------	-----------------	--------	------------------------

11022	multistage compressor	Effect	Mechanical Engineering
-------	-----------------------	--------	------------------------

11027	shearing machine	Effect	Mechanical Engineering
-------	------------------	--------	------------------------

9496	boom dog	Effect	Mechanical Engineering
------	----------	--------	------------------------

9495	escapement	Effect	Mechanical Engineering
------	------------	--------	------------------------

9306	revolute joint	Effect	Mechanical Engineering
------	----------------	--------	------------------------

232



9439	vapor-compression cycle	Effect	Mechanical Engineering
A refrigeration cycle in which refrigerant is circulated through a machine which allows for successive boiling (or vaporization) of liquid refrigerant as it passes through an expansion valve, thereby producing a cooling effect in its surroundings, followed by compression of vapor to liquid.			
9328	pedestal design	Effect	Mechanical Engineering
A robot design centered on the vertical axis of a central pedestal, in which the motion of any workpiece is confined to a spherical working envelope.			
9436	domestic refrigerator	Effect	Mechanical Engineering
A refrigeration system for household use which typically has a compression machine designed for continuous automatic operation and for conservation of the charges of refrigerant and oil, and is usually motor-driven and air-cooled. Also known as refrigerator.			
9435	absorption system	Effect	Mechanical Engineering
A refrigeration system in which the refrigerant gas in the evaporator is taken up by an absorber and is then, with the application of heat, released in a generator.			
9434	helium refrigerator	Effect	Mechanical Engineering
A refrigerator which uses liquid helium to cool substances to temperatures of 4 K or less.			
13440	actuated roller switch	Effect	Mechanical Engineering
A centrifugal sequence-control switch that is placed in contact with a belt conveyor, immediately preceding the conveyor which it controls.			
11028	wire saw	Effect	Mechanical Engineering
A machine employing one- or three-strand wire cable, up to 16,000 feet (4900 meters) long, running over a pulley as a belt; used in quarries to cut rock by abrasion.			
13442	volute pump	Effect	Mechanical Engineering
A centrifugal pump housed in a spiral casing.			
9372	hoe shovel	Effect	Mechanical Engineering
A revolving shovel with a pull-type bucket rigidly attached to a stick hinged on the end of a live boom.			
9370	smoothing mill	Effect	Mechanical Engineering
A revolving stone wheel used to cut and bevel glass or stone.			

9369	Selwood engine	Effect	Mechanical Engineering
A revolving-block engine in which two curved pistons opposed 180° run in toroidal tracks, forcing the entire engine block to rotate.			
9368	Mercer engine	Effect	Mechanical Engineering
A revolving-block engine in which two opposing pistons operate in a single cylinder with two rollers attached to each piston; intake ports are uncovered when the pistons are closest together, and exhaust ports are uncovered when they are farthest apart.			
9014	roller bearing	Effect	Mechanical Engineering
A shaft bearing characterized by parallel or tapered steel rollers confined between outer and inner rings.			
949	Francis turbine	Effect	Mechanical Engineering
A reaction hydraulic turbine of relatively medium speed with radial flow of water in the runner.			
12205	bucket-ladder dredge	Effect	Mechanical Engineering
A dredge whose digging mechanism consists of a ladderlike truss on the periphery of which is attached an endless chain riding on sprocket wheels and carrying attached buckets. Also 77 bucket-ladder excavator known as bucket ladder; bucket-line dredge; ladder-bucket dredge; ladder dredge.			
12204	suction-cutter dredger	Effect	Mechanical Engineering
A dredger in which rotary blades dislodge the material to be excavated, which is then removed by suction as in a sand-pump dredger.			
5029	eddy-current clutch	Effect	Mechanical Engineering
A type of electromagnetic clutch in which torque is transmitted by means of eddy currents induced by a magnetic field set up by a coil carrying direct current in one rotating member.			
501	rotary valve	Effect	Mechanical Engineering
A valve for the admission or release of working fluid to or from an engine cylinder where the valve member is a ported piston that turns on its axis.			
5010	four-way valve	Effect	Mechanical Engineering
A valve at the junction of four waterways which allows passage between any two adjacent waterways by means of a movable element operated by a quarter turn.			
5009	air valve	Effect	Mechanical Engineering

A valve that automatically lets air out of or into a liquid-carrying pipe when the internal pressure drops below atmospheric.

4989      bend wheel      Effect      Mechanical Engineering

A wheel used to interrupt and change the normal path of travel of the conveying or driving medium; most generally used to effect a change in direction of conveyor travel from inclined to horizontal or a similar change.

4986      differential windlass      Effect      Mechanical Engineering

A windlass in which the barrel has two sections, each having a different diameter; the rope winds around one section, passes through a pulley (which carries the load), then winds around the other section of the barrel.

4978      vibrating grizzlies      Effect      Mechanical Engineering

Bar grizzlies mounted on eccentrics so that the entire assembly is given a forward and backward movement at a speed of some 100 strokes a minute.

4965      radiation loss      Effect      Mechanical Engineering

Boiler heat loss to the atmosphere by conduction, radiation, and convection.

13267      centrifugal clutch      Effect      Mechanical Engineering

A clutch operated by centrifugal force from the speed of rotation of a shaft, as when heavy expanding friction shoes act on the internal surface of a rim clutch, or a flyball-type mechanism is used to activate clutching surfaces on cones and

4897      vibration separation      Effect      Mechanical Engineering

Classification or separation of grains of solids in which separation through a screen is expedited by vibration or oscillatory movement of the screening mediums.

1220      self-centering chuck      Effect      Mechanical Engineering

A drill chuck that, when closed, automatically positions the drill rod in the center of the drive rod of a diamond- drill swivel head.

4892      tube turbinizing      Effect      Mechanical Engineering

Cleaning tubes by passing a power-driven rotary device through them.

4876      airdraulic      Effect      Mechanical Engineering

Combining pneumatic and hydraulic action for operation.

487      afterburning      Effect      Mechanical Engineering

Combustion in an internal combustion engine following the maximum pressure of explosion.

12258      rotary pump      Effect      Mechanical Engineering

A displacement pump that delivers a steady flow by the action of two members in rotational contact.

4856      pneumatic drill      Effect      Mechanical Engineering

Compressed-air drill worked by reciprocating piston, hammer action, or turbo drive.

12262      disk cam      Effect      Mechanical Engineering

A disk with a contoured edge which rotates about an axis perpendicular to the disk, communicating motion to the cam follower which remains in contact with the edge of the disk.

4815      Ljungstrom heater      Effect      Mechanical Engineering

Continuous, regenerative, heat-transfer air heater (recuperator) made of slow-moving rotors packed with closely spaced metal plates or wires with a housing to confine the hot and cold gases to opposite sides.

4795      field excitation      Effect      Mechanical Engineering

Control of the speed of a series motor in an electric or dieselelectric locomotive by changing the relation between the armature current and the field strength, either through a reduction in field current by shunting the field coils with resistance, or through the use of field taps.

12007      Steelflex coupling      Effect      Mechanical Engineering

A flexible coupling made with two grooved steel hubs keyed to their respective shafts and connected by a specially tempered alloy-steel member called the grid.

4957      gyratory screen      Effect      Mechanical Engineering

Boxlike machine with a series of horizontal screens nested in a vertical stack with downward-decreasing meshopening sizes; near-circular motion causes undersized material to sift down through each screen in succession.

12177      drill press      Effect      Mechanical Engineering

A drilling machine in which a vertical drill moves into the work, which is stationary.

12020      vane      Effect      Mechanical Engineering

A flat or curved surface exposed to a flow of fluid so as to be forced to move or to rotate about an axis, to rechannel the flow, or to act as the impeller; for example, in a steam turbine, propeller fan, or hydraulic turbine.

12074      scotch boiler      Effect      Mechanical Engineering

A fire-tube boiler with one or more cylindrical internal furnaces enveloped by a boiler shell equipped with five tubes in its upper part; heat is transferred to water partly in the furnace area and partly in passage of hot gases through the tubes. Also known as dry-back boiler; scotch marine boiler (marine usage).

5578	Corliss valve	Effect	Mechanical Engineering
An oscillating type of valve gear with a trip mechanism for the admission and exhaust of steam to and from an engine cylinder.			
5494	antifriction bearing	Effect	Mechanical Engineering
Any bearing having the capability of reducing friction effectively.			
5412	conveyor	Effect	Mechanical Engineering
Any materials-handling machine designed to move individual articles such as solids or free-flowing bulk materials over a horizontal, inclined, declined, or vertical path of travel with continuous motion.			
13277	abrasive belt	Effect	Mechanical Engineering
A cloth, leather, or paper band impregnated with grit and rotated as an endless loop to abrade materials through continuous friction.			
5389	circular saw	Effect	Mechanical Engineering
Any of several power tools for cutting wood or metal, having a thin steel disk with a toothed edge that rotates on a			
5373	hammer drill	Effect	Mechanical Engineering
Any of three types of fast-cutting, compressed-air rock drills (drifter, sinker, and stoper) in which a hammer strikes rapid blows on a loosely held piston, and the bit remains against the rock in the bottom of the hole, rebounding slightly at each blow, but does not reciprocate.			
5362	windmill	Effect	Mechanical Engineering
Any of various mechanisms, such as a mill, pump, or electric generator, operated by the force of wind against vanes or sails radiating about a horizontal shaft.			
5035	push-bar conveyor	Effect	Mechanical Engineering
A type of chain conveyor in which two endless chains are crossconnected at intervals by push bars which propel the load along a stationary bed or trough of the conveyor.			
13276	electromagnetic clutch	Effect	Mechanical Engineering
A clutch based on magnetic coupling between conductors, such as a magnetic fluid and powder clutch, an eddy-current clutch, or a hysteresis clutch.			
5037	vane motor rotary actuator	Effect	Mechanical Engineering
A type of rotary motor actuator which consists of a rotor with several spring-loaded sliding vanes in an elliptical chamber; hydraulic fluid enters the 596 variable-area meter chamber and forces the vanes before it as it moves to the outlets.			

12195	ultrasonic drill	Effect	Mechanical Engineering
A drill in which a magnetostrictive transducer is attached to a tapered cone serving as a velocity transformer; with an appropriate tool at the end of the transformer, practically any shape of hole can be drilled in hard, brittle materials such as tungsten carbide and gems.			
5227	reciprocating flight conveyor	Effect	Mechanical Engineering
A reciprocating beam or beams with hinged flights that advance materials along a conveyor trough.			
252	ring-oil	Effect	Mechanical Engineering
To oil (a bearing) by conveying the oil to the point to be lubricated by means of a ring, which rests upon and turns with the journal, and dips into a reservoir containing the lubricant.			
5217	engine balance	Effect	Mechanical Engineering
Arrangement and construction of moving parts in reciprocating or rotating machines to reduce dynamic forces which may result in undesirable vibrations.			
7470	double Hooke's joint	Effect	Mechanical Engineering
A universal joint which eliminates the variation in angular displacement and angular velocity between driving and driven shafts, consisting of two Hooke's downcomer joints with an intermediate shaft.			
5168	burton	Effect	Mechanical Engineering
A small hoisting tackle with two blocks, usually a single block and a double block, with a hook block in the running part of the rope.			
5147	recirculating-ball steering	Effect	Mechanical Engineering
A steering system that transmits steering movements by means of steel balls placed between a worm gear and a nut.			
5120	Dorr agitator	Effect	Mechanical Engineering
A tank used for batch washing of precipitates which cannot be leached satisfactorily in a tank; equipped with a slowly rotating rake at the bottom, which moves settled solids to the center, and an air lift that lifts slurry to the launders. Also known as Dorr thickener.			
13973	spool	Effect	Mechanical Engineering
1. The drum of a hoist. 2. The movable part of a slide-type hydraulic valve.			
4759	slotting	Effect	Mechanical Engineering
Cutting a mortise or a similar narrow aperture in a material using a machine with a vertically reciprocating tool. slotting			

machine

533	connecting rod	Effect	Mechanical Engineering
Any straight link that transmits motion or power from one linkage to another within a mechanism, especially linear to rotary motion, as in a reciprocating engine or compressor.			
12446	dashpot	Effect	Mechanical Engineering
A device used to dampen and control a motion, in which an attached piston is loosely fitted to move slowly in a cylinder containing oil.			
4210	electric ignition	Effect	Mechanical Engineering
Ignition of a charge of fuel vapor and air in an internal combustion engine by passing a high-voltage electric 189 electric image current between two electrodes in the combustion chamber.			
412	free turbine	Effect	Mechanical Engineering
In a turbine engine, a turbine wheel that drives the output shaft and is not connected to the shaft driving the compressor.			
4077	torque arm	Effect	Mechanical Engineering
In automotive vehicles, an arm to take the torque of the rear axle. torque-coil magnetometer			
26	desilter	Effect	Mechanical Engineering
Wet, mechanical solids classifier (separator) in which silt particles settle as the carrier liquid is slowly stirred by horizontally revolving rakes; solids are plowed outward and removed at the periphery of the container bowl.			
13265	jaw clutch	Effect	Mechanical Engineering
A clutch that provides positive connection of one shaft with another by means of interlocking faces; may be square or spiral; the most common type of positive clutch.			
3800	air cooling	Effect	Mechanical Engineering
Lowering of air temperature for comfort, process control, or food preservation. air course See airway.			
12387	nonreclosing pressure relief device	Effect	Mechanical Engineering
A device which remains open after relieving pressure and must be reset before it can operate again.			
3742	mechanical seal	Effect	Mechanical Engineering
Mechanical assembly that forms a leakproof seal between flat, rotating surfaces to prevent high-pressure leakage. mechanical separation			
12395	Dings magnetic separator	Effect	Mechanical Engineering

A device which is suspended above a belt conveyor to pull out and separate magnetic material from burden as thick as 40 inches (1 meter) and at belt speeds up to 750 feet (229 meters) per minute.

13272	air-tube clutch	Effect	Mechanical Engineering
-------	-----------------	--------	------------------------

A clutch fitted with a tube whose inflation causes the clutch to engage, and deflation, to disengage.

1272	head pulley	Effect	Mechanical Engineering
------	-------------	--------	------------------------

The pulley at the discharge end of a conveyor belt; may be either an idler or a drive pulley.

12333	shearing die	Effect	Mechanical Engineering
-------	--------------	--------	------------------------

A die with a punch for shearing the work from the stock.

12478	steam condenser	Effect	Mechanical Engineering
-------	-----------------	--------	------------------------

A device to maintain vacuum conditions on the exhaust of a steam prime mover by transfer of heat to circulating water or air at the lowest ambient temperature.

13264	cone clutch	Effect	Mechanical Engineering
-------	-------------	--------	------------------------

A clutch which uses the wedging action of mating conical surfaces to transmit friction torque.

12490	air washer air separator	Effect	Mechanical Engineering
-------	--------------------------	--------	------------------------

A device that uses an air current to separate a material from another of greater density or particles from others of greater size.

25	dewaterer	Effect	Mechanical Engineering
----	-----------	--------	------------------------

Wet-type mechanical classifier (solids separator) in which solids settle out of the carrier liquid and are concentrated for recovery.

617	expansion cooling	Effect	Mechanical Engineering
-----	-------------------	--------	------------------------

Cooling of a substance by having it undergo adiabatic expansion.

12516	atomizer	Effect	Mechanical Engineering
-------	----------	--------	------------------------

A device that produces a mechanical subdivision of a bulk liquid, as by spraying, sprinkling, misting, or nebulizing.

13244	cooling coil	Effect	Mechanical Engineering
-------	--------------	--------	------------------------

A coiled arrangement of pipe or tubing for the transfer of heat between two fluids.

3582	bevel gear	Effect	Mechanical Engineering
------	------------	--------	------------------------

One of a pair of gears used to connect two shafts whose axes intersect.



14422	arbor	Effect	Mechanical Engineering
1. A cylindrical device positioned between the spindle and outer bearing of a milling machine and designed to hold a milling cutter. 2. A shaft or spindle used to hold a revolving cutting tool or the work to be cut.			
12415	hoist overwind device	Effect	Mechanical Engineering
A device which can activate an emergency brake when a hoisted load travels beyond a predetermined point into a danger zone.			
1192	mechanical advantage	Effect	Mechanical Engineering
The ratio of the force produced by a machine such as a lever or pulley to the force applied to it. Also known as force ratio.			
4690	pulverizer	Effect	Mechanical Engineering
Device for breaking down of solid lumps into a fine material by cleavage along crystal faces.			
4689	diaphragm compressor	Effect	Mechanical Engineering
Device for compression of small volumes of a gas by means of a reciprocally moving diaphragm, in place of pistons or rotors.			
4687	pellet mill	Effect	Mechanical Engineering
Device for injecting particulate, granular or pasty feed into holes of a roller, then compacting the feed into a continuous solid rod to be cut off by a knife at the periphery of the roller.			
4685	chop-type feeder	Effect	Mechanical Engineering
Device for semicontinuous feed of solid materials to a process 101 chord unit, with intermittent opening and closing of a hopper gate (bottom closure) by a control arm actuated by an eccentric cam.			
4682	ribbon mixer	Effect	Mechanical Engineering
Device for the mixing of particles, slurries, or pastes of solids by the revolution of an elongated helicoid (spiral) ribbon of metal.			
468	rotary feeder	Effect	Mechanical Engineering
Device in which a rotating element or vane discharges powder or granules at a predetermined rate.			
4675	centrifugal atomizer	Effect	Mechanical Engineering
Device that atomizes liquids with a spinning disk; liquid is fed onto the center of the disk, and the whirling motion (3000 to 50,000 revolutions per minute) forces the liquid outward in thin sheets to cause atomization.			
13266	overrunning clutch	Effect	Mechanical Engineering

65	sand mill	Effect	Mechanical Engineering
Variation of a ball-type size-reduction mill in which grains of sand serve as grinding balls.			

404	unsprung weight	Effect	Mechanical Engineering
The weight of the various parts of a vehicle that are not carried on the springs, such as wheels, axles, and brakes.			

54	rotary annular extractor	Effect	Mechanical Engineering
<p>Vertical, cylindrical shell with an inner, rotating cylinder; liquids to be contacted flow countercurrently through the annular space between the rotor and shell; used for liquid-liquid extraction processes.</p>			

4336	helical gear	Effect	Mechanical Engineering
Gear wheels running on parallel axes, with teeth twisted oblique to the gear axis.			

1239	gyro wheel	Effect	Mechanical Engineering
The rapidly spinning wheel in a gyroscope, which resists being disturbed.			

1233	V-bend die	Effect	Mechanical Engineering
A die with a triangular cross-sectional opening to provide two edges over which bending is accomplished.			

4247	plate-fin exchanger	Effect	Mechanical Engineering
Heat-transfer device made up of a stack or layers, with each layer consisting of a corrugated fin between flat metal sheets sealed off on two sides by channels or bars to form passages for the flow of fluids.			
12332	U U-bend die	Effect	Mechanical Engineering
A die with a square or rectangular cross section which provides two edges over which metal can be drawn.			
522	taper-rolling bearing	Effect	Mechanical Engineering
A roller bearing capable of sustaining end thrust by means of tapered rollers and coned races.			
4609	pneumatic drilling	Effect	Mechanical Engineering
Drilling a hole when using air or gas in lieu of conventional drilling fluid as the circulating medium; an adaptation of rotary drilling.			
6359	Stirling engine	Effect	Mechanical Engineering
An engine in which work is performed by the expansion of a gas at high temperature; heat for the expansion is supplied through the wall of the piston cylinder.			
6253	Carnot engine	Effect	Mechanical Engineering
An ideal, frictionless engine which operates in a Carnot cycle.			
11739	droop governor	Effect	Mechanical Engineering
A governor whose equilibrium speed decreases as the load on the drop ball machinery controlled by the governor increases.			
6536	parallel linkage	Effect	Mechanical Engineering
An automotive steering system that has a short idler arm mounted parallel to the pitman arm.			
11740	overspeed governor	Effect	Mechanical Engineering
A governor that stops the prime mover when speed is excessive. overspin			
6512	Wankel engine	Effect	Mechanical Engineering
An eccentric-rotortype internal combustion engine with only two primary moving parts, the rotor and the eccentric shaft; the rotor moves in one direction around the trochoidal chamber containing peripheral intake and exhaust ports. Also known as rotarycombustion engine.			
1174	isochronous governor	Effect	Mechanical Engineering
A governor that keeps the speed of a prime mover constant at all loads. Also known as astatic governor.			

6485	telpher	Effect	Mechanical Engineering
An electric hoist hanging from and driven by a wheeled cab rolling on a single overhead rail or a rope.			
6413	ball screw	Effect	Mechanical Engineering
An element used to convert rotation to longitudinal motion, consisting of a threaded rod linked to a threaded nut by ball bearings constrained to roll in the space formed by the threads, in order to reduce friction.			
6410	rolamite mechanism	Effect	Mechanical Engineering
An elemental mechanism consisting of two rollers contained by two parallel planes and bounded by a fixed S-shaped band undertension.			
34	kellering	Effect	Mechanical Engineering
Three-dimensional machining of a contoured surface by tracer-milling the die block or punch; the cutter path is controlled by a tracer that follows the contours on a die model.			
11738	centrifugal governor	Effect	Mechanical Engineering
A governor whose flyweights respond to centrifugal force to sense speed.			
5173	vibrating pebble mill	Effect	Mechanical Engineering
A size-reduction device in which feed is ground by the action of vibrating, moving pebbles.			
11737	Hayward orange peel	Effect	Mechanical Engineering
A grab bucket that operates like the clamshell type but has four blades pivoted to close.			
5687	clamshell bucket	Effect	Mechanical Engineering
A two-sided bucket used in a type of excavator to dig in a vertical direction; the bucket is dropped while its leaves are open and digs as they close. Also known as clamshell grab.			
6352	solar engine	Effect	Mechanical Engineering
An engine which converts thermal energy from the sun into electrical, mechanical, or refrigeration energy; may be used as a method of spacecraft propulsion, either directly by photon pressure on huge solar sails, or indirectly from solar cells or from a reflectorboiler combination used to heat a fluid.			
348	roll threading	Effect	Mechanical Engineering
Threading a metal workpiece by rolling it either between grooved circular rolls or between grooved straight lines.			
625	live-roller conveyor	Effect	Mechanical Engineering
Conveying machine which moves objects over a series of rollers by the application of power to all or some of the rollers.			

11768	triplex chain block	Effect	Mechanical Engineering
A geared hoist using an epicyclic train.			
1328	refrigeration system	Effect	Mechanical Engineering
A closed-flow system in which a refrigerant is compressed, condensed, and expanded to produce cooling at a lower temperature level and rejection of heat at a higher temperature level for the purpose of extracting heat from a controlled space.			
6267	metering screw	Effect	Mechanical Engineering
An extrusion-type screw feeder or conveyor section used to feed pulverized or doughy material at a constant rate.			
1028	windmilling	Effect	Mechanical Engineering
The rotation of a propeller from the force of the air when the engine is not operating.			
103	impeller	Effect	Mechanical Engineering
The rotating member of a turbine, blower, fan, axial or centrifugal pump, or mixing apparatus. Also known as rotor. impeller pump			
1034	troughing rolls	Effect	Mechanical Engineering
The rolls of a troughing idler that are so mounted on an incline as to elevate each edge of the belt into a trough. Trouton's rule			
100	autogenous grinding	Effect	Mechanical Engineering
The secondary grinding of material by tumbling the material in a revolving cylinder, without balls or bars taking part in the operation.			
694	roller cam follower	Effect	Mechanical Engineering
A follower consisting of a rotatable wheel at the end of the shaft.			
11643	fairlead	Effect	Mechanical Engineering
A group of pulleys or rollers used in conjunction with a winch or similar apparatus to permit the cable to be reeled from any direction.			
13285	thermosiphon	Effect	Mechanical Engineering
A closed system of tubes connected to a water-cooled engine which permit natural circulation and cooling of the liquid by utilizing the difference in density of the hot and cool portions.			
702	pillar crane	Effect	Mechanical Engineering

A crane whose mechanism can be rotated about a fixed pillar.

7012	air cylinder	Effect	Mechanical Engineering
------	--------------	--------	------------------------

A cylinder in which air is compressed by a piston, compressed air is stored, or air drives a piston.

11676	ring-roller mill	Effect	Mechanical Engineering
-------	------------------	--------	------------------------

A grinding mill in which material is fed past spring-loaded rollers that apply force against the sides of a revolving bowl.

Also known as roller mill.

11677	colloid mill	Effect	Mechanical Engineering
-------	--------------	--------	------------------------

A grinding mill for the making of very fine dispersions of liquids or solids by breaking down particles in an emulsion or

6992	peristaltic pump	Effect	Mechanical Engineering
------	------------------	--------	------------------------

A device for moving fluids by the action of multiple, equally spaced rollers, which rotate and compress a flexible tube.

11678	surface grinder	Effect	Mechanical Engineering
-------	-----------------	--------	------------------------

A grinding machine that produces a plane surface.

11680	ball-and-race-type pulverizer	Effect	Mechanical Engineering
-------	-------------------------------	--------	------------------------

A grinding machine in which balls rotate under an applied force between two races to crush materials, such as coal, to fine consistency. Also known as ball-bearing pulverizer.

310	feather	Effect	Mechanical Engineering
-----	---------	--------	------------------------

To change the pitch on a propeller in order to reduce drag and prevent windmilling in case of engine failure.

654	sychromesh	Effect	Mechanical Engineering
-----	------------	--------	------------------------

An automobile transmission device that minimizes clashing; acts as a friction clutch, bringing gears approximately to correct speed just before meshing. synchronization

1168	universal grinding machine	Effect	Mechanical Engineering
------	----------------------------	--------	------------------------

A grinding machine having a swivel table and headstock, and a wheel head that can be rotated on its base.

6353	rocking valve	Effect	Mechanical Engineering
------	---------------	--------	------------------------

An engine valve in which a disk or cylinder turns in its seat to permit fluid flow.

11685	air-lift hammer	Effect	Mechanical Engineering
-------	-----------------	--------	------------------------

A gravity drop hammer used in closed die forging in which the ram is raised to its starting point by means of an air

678	sleeve valve	Effect	Mechanical Engineering
-----	--------------	--------	------------------------

An admission and exhaust valve on an internal-combustion engine consisting of one or two hollow sleeves that fit around the inside of the cylinder and move with the piston so that their openings align with the inlet and exhaust ports in the cylinder at proper stages in the cycle.

6758      variable-volume air system      Effect      Mechanical Engineering

An airconditioning system in which the volume of air delivered to each controlled zone is varied automatically from a preset minimum to a maximum value, depending on the load in each zone.

1315      supersonic compressor      Effect      Mechanical Engineering

A compressor in which a supersonic velocity is imparted to the fluid relative to the rotor blades, supersonic diffuser the stator blades, or both, producing oblique shock waves over the blades to obtain a highpressure rise.

649      Hardinge mill      Effect      Mechanical Engineering

A tri cone type of ball mill; the cones become steeper from the feed end toward the discharge end.

6677      conical bearing      Effect      Mechanical Engineering

An antifriction bearing employing tapered rollers.

6676      fluid-film bearing      Effect      Mechanical Engineering

An antifriction bearing in which rubbing surfaces are kept apart by a film of lubricant such as oil.

973      waterwall      Effect      Mechanical Engineering

The side of a boiler furnace consisting of water-carrying tubes which absorb radiant heat and thereby prevent excessively high furnace temperatures.

986      centrifugal separation      Effect      Mechanical Engineering

The separation of two immiscible liquids in a centrifuge within a much shorter period of time than could be accomplished solely by gravity.

13128      aftercondenser      Effect      Mechanical Engineering

A condenser in the second stage of a two-stage ejector; used in steam power plants, refrigeration systems, and air conditioning systems.

6954      timing      Effect      Mechanical Engineering

Adjustment in the relative position of the valves and crankshaft of an automobile engine in order to produce the largest effective output of power.

1062      brake shoe      Effect      Mechanical Engineering

The renewable friction element of a shoe brake. Also known as shoe.

5756      inertia governor      Effect      Mechanical Engineering

A speed-control device utilizing suspended masses that respond to speed changes by reason of their inertia.

11997      ball float      Effect      Mechanical Engineering

A floating device, usually approximately spherical, which is used to operate a ball valve.

11970      turbine      Effect      Mechanical Engineering

A fluid acceleration machine for generating rotary mechanical power from the energy in a stream of fluid.

574      air spring      Effect      Mechanical Engineering

A spring in which the energy storage element is air confined in a container that includes an elastomeric bellows or diaphragm.

5738      constant-force spring      Effect      Mechanical Engineering

A spring which has a constant restoring force, regardless of displacement.

12003      fast coupling      Effect      Mechanical Engineering

A flexible geared coupling that uses two interior hubs on the shafts with circumferential gear teeth surrounded by a casing having internal gear teeth to mesh and connect the two hubs.

5843      two-stroke cycle      Effect      Mechanical Engineering

An internal combustion engine cycle completed in two strokes of the piston.

12004      cog belt      Effect      Mechanical Engineering

A flexible device used for timing and for slip-free power transmission. cogeneration

5742      torsion bar      Effect      Mechanical Engineering

A spring flexed by twisting about its axis; found in the spring suspension of truck and passenger car wheels, in production machines where space limitations are critical, and in high-speed mechanisms where inertia forces must be

11966      Dupre equation duct      Effect      Mechanical Engineering

A fluid flow passage which may range from a few inches in diameter to many feet in rectangular cross section, usually constructed of galvanized steel, aluminum, or copper, through which air flows in a ventilation system or to a compressor, supercharger, or other equipment at speeds ranging to thousands of feet per minute.

1074      ultrasonic machining      Effect      Mechanical Engineering

The removal of material by abrasive bombardment and crushing in which a flat-ended tool of soft alloy steel is made to



vibrate at a frequency of about 20,000 hertz and an amplitude of 0.001-0.003 inch (0.0254-0.0762 millimeter) while a fine abrasive of silicon carbide, aluminum oxide, or boron carbide is carried by a liquid between tool and work.

11930 vacuum brake Effect Mechanical Engineering

A form of air brake which operates by maintaining low pressure in the actuating cylinder; braking action is produced by opening one side of the cylinder to the atmosphere so that atmospheric pressure, aided in some designs by gravity, applies the brake.

11834 continous-type furnace Effect Mechanical Engineering

A furnace used for heat treatment of materials, with or without direct firing; pieces are loaded through one door, progress continuously through the furnace, and are discharged from another door.

5839 spark-ignition engine Effect Mechanical Engineering

An internal combustion engine in which an electrical discharge ignites the explosive mixture of fuel and air.

1083 centrifugal filtration Effect Mechanical Engineering

The removal of a liquid from a slurry by introducing the slurry into a rapidly rotating basket, where the solids are retained on a porous screen and the liquid is forced out of the cake by the centrifugal action.

5689 vacuum heating Effect Mechanical Engineering

A two-pipe steam heating system in which a vacuum pump is used to maintain a suction in the return piping, thus creating a positive return flow of air and condensate. vacuum mat

11784 rack and pinion Effect Mechanical Engineering

A gear arrangement consisting of a toothed bar that meshes with a pinion.

6228 Pelton wheel Effect Mechanical Engineering

An impulse hydraulic turbine in which pressure of the water supply is converted into velocity by a few stationary nozzles, and the water jets then impinge on the buckets mounted on the rim of a wheel; usually limited to high head installations, exceeding 500 feet (150 meters). Also known as Pelton turbine.

5844 four-stroke cycle Effect Mechanical Engineering

An internal combustion engine cycle completed in four piston strokes; includes a suction stroke, compression stroke, expansion stroke, and exhaust stroke. four-track tape

1180 open-cycle gas turbine Effect Mechanical Engineering

A gas turbine prime mover in which air is compressed in the compressor element, fuel is injected and burned in the

combustor, and the hot products are expanded in the turbine element and exhausted to the atmosphere.

6196	Flettner windmill	Effect	Mechanical Engineering
------	-------------------	--------	------------------------

An inefficient windmill with four arms, each consisting of a rotating cylinder actuated by a Savonius rotor.

11779	chain gear	Effect	Mechanical Engineering
-------	------------	--------	------------------------

A gear that transmits motion from one wheel to another by means of a chain.

6367	radial engine	Effect	Mechanical Engineering
------	---------------	--------	------------------------

An engine characterized by radially arranged cylinders at equiangular intervals around the crankshaft.

1079	mechanical refrigeration	Effect	Mechanical Engineering
------	--------------------------	--------	------------------------

The removal of heat by utilizing a refrigerant subjected to cycles of refrigerating thermodynamics and employing a mechanical compressor.

5737	shock absorber	Effect	Mechanical Engineering
------	----------------	--------	------------------------

A spring, a dashpot, or a combination of the two, arranged to minimize the acceleration of the mass of a mechanism or portion thereof with respect to its frame or support.

12005	chain drive	Effect	Mechanical Engineering
-------	-------------	--------	------------------------

A flexible device for power transmission, hoisting, or conveying, consisting of an endless chain whose links mesh with toothed wheels fastened to the driving and driven shafts.

5842	Sabathe's cycle	Law	Mechanical Engineering
------	-----------------	-----	------------------------

An internal combustion engine cycle in which part of the combustion is explosive and part at constant pressure.

2142	Rankine efficiency	Law	Mechanical Engineering
------	--------------------	-----	------------------------

The efficiency of an ideal engine operating on the Rankine cycle under specified conditions of steam temperature and pressure.

214	nozzle efficiency	Law	Mechanical Engineering
-----	-------------------	-----	------------------------

The efficiency with which a nozzle converts potential energy into kinetic energy, commonly expressed as the ratio of the actual change in kinetic energy to the ideal change at the given pressure ratio.

1827	Rittinger's law	Law	Mechanical Engineering
------	-----------------	-----	------------------------

The law that energy needed to reduce the size of a solid particle is directly proportional to the resultant increase in surface area.

1782	Willans line	Law	Mechanical Engineering
------	--------------	-----	------------------------

The line (nearly straight) on a graph showing steam consumption (pounds per hour) versus power output (kilowatt or horsepower) for a steam engine or turbine; frequently extended to show total fuel consumed (pounds per hour) for gas turbines, internal combustion engines, and complete power plants.

2140      energy conversion efficiency      Law      Mechanical Engineering

The efficiency with which the energy of the working substance is converted into kinetic energy.

4529      Buckingham's equations      Law      Mechanical Engineering

Equations which give the durability of gears and the dynamic loads to which they are subjected in terms of their dimensions, hardness, surface endurance, and composition.

4540      available energy      Law      Mechanical Engineering

Energy which can in principle be converted to mechanical work.

11904      Moody formula      Law      Mechanical Engineering

A formula giving the efficiency  $e'$  of a field turbine, whose runner has diameter  $D'$ , in terms of the efficiency  $e$  of a model turbine, whose runner has diameter  $D$ ;  $e' = 1 - (1 - e) (D/D')^{1/5}$ .

8053      Bond and Wang theory      Law      Mechanical Engineering

A theory of crushing and grinding from which the energy, in horsepower-hours, required to crush a short ton of material is derived.

8050      Betz momentum theory      Law      Mechanical Engineering

A theory of windmill performance that considers the deceleration in the air traversing the windmill disk.

2099      Thoma cavitation coefficient      Law      Mechanical Engineering

The equation for measuring cavitation in a hydraulic turbine installation, relating vapor pressure, barometric pressure, runner setting, tail water, and head.

393      Drzewiecki theory      Law      Mechanical Engineering

In theoretical investigations of windmill performance, a theory concerning the air forces produced on an element of the blade.

8510      Bond's law      Law      Mechanical Engineering

A statement that relates the work required for the crushing of solid materials (for example, rocks and ore) to the product size and surface area and the lengths 69 Bond's third theory of cracks formed. Also known as Bond's third theory.

4093      mechanical efficiency      Law      Mechanical Engineering

In an engine, the ratio of brake horsepower to indicated horsepower.

908	Cardan motion	Prime Effect	Mechanical Engineering
-----	---------------	--------------	------------------------

The straight-line path followed by a moving centrode in a fourbar centrode linkage.

12383	heat pump	Prime Effect	Mechanical Engineering
-------	-----------	--------------	------------------------

A device which transfers heat from a cooler reservoir to a hotter one, expending mechanical energy in the process, especially when the main purpose is to heat the hot reservoir rather than refrigerate the cold one.

4659	rotary cutter	Prime Effect	Mechanical Engineering
------	---------------	--------------	------------------------

Device used to cut tough or fibrous materials by the shear action between two sets of blades, one set on a rotating holder, the other stationary on the surrounding casing.

488	block and tackle	Prime Effect	Mechanical Engineering
-----	------------------	--------------	------------------------

Combination of 65 block brake a rope or other flexible material and independently rotating frictionless pulleys. Also known as block and fall.

## Systems Engineering

9717	fuzzy system	Effect	Systems Engineering
------	--------------	--------	---------------------

A process that is too complex to be modeled by using conventional mathematical methods, and that gives rise to data that are, in general, soft, with no precise boundaries; examples are large-scale engineering complex systems, social systems, economic systems, management systems, medical diagnostic processes, and human perception.

## Thermal Engineering

713	eddy heat conduction	Effect	Thermal Engineering
-----	----------------------	--------	---------------------

The transfer of heat by means of eddies in turbulent flow, treated analogously to molecular conduction.

712	heat convection	Effect	Thermal Engineering
-----	-----------------	--------	---------------------

The transfer of thermal energy by actual physical movement from one location to another of a substance in which thermal energy is stored. Also known as thermal convection.

1266	volatility	Effect	Thermal Engineering
------	------------	--------	---------------------

The quality of having a low boiling point or subliming temperature at ordinary pressure or, equivalently, of having a high vapor pressure at ordinary temperatures.

620	sublimation cooling	Effect	Thermal Engineering
Cooling caused by the extraction of energy to produce sublimation.			
704	absolute expansion	Effect	Thermal Engineering
The true expansion of a liquid with temperature, as calculated when the expansion of the container in which the volume of the liquid is measured is taken into account; in contrast with apparent expansion.			
115	reduced temperature	Effect	Thermal Engineering
The ratio of the temperature of a substance to its critical temperature.			
1254	heat release	Effect	Thermal Engineering
The quantity of heat released by a furnace or other heating mechanism per second, divided by its volume.			
792	potential temperature	Effect	Thermal Engineering
The temperature that would be reached by a compressible fluid if it were adiabatically compressed or expanded to a standard pressure, usually 1 bar.			
1398	critical pressure	Effect	Thermal Engineering
The pressure of the liquid-vapor critical point.			
1096	temperature color scale	Effect	Thermal Engineering
The relation between an incandescent substance's temperature and the color of the light it emits.			
temperature-compensated Zener diode			
128	negative temperature	Effect	Thermal Engineering
The property of a thermally isolated thermodynamic system whose elements are in thermodynamic equilibrium among themselves, whose allowed states have an upper limit on their possible energies, and whose high-energy states are more occupied than the low-energy ones.			
1409	exergy	Effect	Thermal Engineering
The portion of the total energy of a system that is available for conversion to useful work; in particular, the quantity of work that can be performed by a fluid relative to a reference condition, usually the surrounding ambient condition.			
1127	thermal resistivity	Effect	Thermal Engineering
The reciprocal of the thermal conductivity.			
1355	sublimation	Effect	Thermal Engineering
The process by which solids are transformed directly to the vapor state or vice versa without passing through the liquid			

phase.

1040      magnetocaloric effect      Effect      Thermal Engineering

The reversible change of temperature accompanying the change of magnetization of a ferromagnetic material.  
magnetoelectronics

116      reduced pressure      Effect      Thermal Engineering

The ratio of the pressure of a substance to its critical pressure. reduced-pressure distillation See vacuum distillation.  
reduced property See reduced value.

1508      differential heat of solution      Effect      Thermal Engineering

The partial derivative of the total heat of solution with respect to the molal concentration of one component of the solution, when the concentration of the other component or components, the pressure, and the temperature are held constant.

856      enthalpy      Effect      Thermal Engineering

The sum of the internal energy of a system plus the product of the system's volume multiplied by the pressure exerted on the system by its surroundings. Also known as heat content; sensible heat; total heat.

1555      primary phase      Effect      Thermal Engineering

The only crystalline phase capable of existing in equilibrium with a given liquid.

1160      absorptivity      Effect      Thermal Engineering

The ratio of the radiation absorbed by a surface to the total radiation incident on the surface.

618      supercooling      Effect      Thermal Engineering

Cooling of a substance below the temperature at which a change of state would ordinarily take place without such a change of state occurring, for example, the cooling of a liquid below its freezing point without freezing taking place; this results in a metastable state.

1184      fugacity coefficient      Effect      Thermal Engineering

The ratio of the fugacity of a gas to its pressure.

1297      thermal inductance      Effect      Thermal Engineering

The product of temperature difference and time divided by entropy flow.

674      consolute temperature      Effect      Thermal Engineering

The upper temperature of immiscibility for a two-component liquid system. Also known as upper consolute temperature; upper critical solution temperature. constant-amplitude recording

1190	pressure coefficient	Effect	Thermal Engineering
The ratio of the fractional change in pressure to the change in temperature under specified conditions, usually constant volume.			
1264	fusibility	Effect	Thermal Engineering
The quality or degree of being capable of being liquefied by heat.			
798	sublimation point	Effect	Thermal Engineering
The temperature at which the vapor pressure of the solid phase subtractive synthesis of a compound is equal to the total pressure of the gas phase in contact with it; analogous to the boiling point of a liquid.			
1210	thermal capacitance	Effect	Thermal Engineering
The ratio of the entropy added to a body to the resulting rise in temperature.			
1215	sensible-heat factor	Effect	Thermal Engineering
The ratio of space sensible heat to space total heat; used 488 sequential collation of range for air-conditioning calculations. Abbreviated SHF.			
13088	isometric process	Effect	Thermal Engineering
A constant-volume, frictionless thermodynamic process in which the system is confined by mechanically rigid boundaries.			
1253	heat capacity	Effect	Thermal Engineering
The quantity of heat required to raise a system one degree in temperature in a specified way, usually at constant pressure or constant volume. Also known as thermal capacity.			
1156	vaporization coefficient	Effect	Thermal Engineering
The ratio of the rate of vaporization of a solid or liquid at a given temperature and corresponding vapor pressure to the rate of vaporization that would be necessary to produce the same vapor pressure at this temperature if every vapor molecule striking the solid or liquid were absorbed there.			
1256	diffusivity	Effect	Thermal Engineering
The quantity of heat passing normally through a unit area per unit time divided by the product of specific heat, density, and temperature gradient. Also known as thermal diffusivity; thermometric conductivity.			
1257	heat of vaporization	Effect	Thermal Engineering
The quantity of energy required to evaporate 1 mole, or a unit mass, of a liquid, at constant pressure and temperature. Also known as enthalpy of vaporization; heat of evaporation; latent heat of vaporization.			

1599	thermophoresis	Effect	Thermal Engineering
The movement of particles in a thermal gradient from high to low temperatures.			
1293	compressibility factor	Effect	Thermal Engineering
The product of the pressure and the volume of a gas, divided by the product of the temperature of the gas and the gas constant; this factor may be inserted in the ideal gas law to take into account the departure of true gases from ideal gas behavior. Also known as deviation factor; gas-deviation factor; supercompressibility factor.			
6894	zeroth law of thermodynamics	Effect	Thermal Engineering
Alaw that if two systems are separately found to be in thermal equilibrium with a third system, the first two systems are in thermal equilibrium with each other, that is, all three systems are at the same temperature.			
6397	van derWaals surface tension formula	Effect	Thermal Engineering
An empirical formula for the dependence of the surface tension on temperature: $\gamma = K p^{2/3} T_c^{1/3} (1 - T/T_c)^n$ , where $\gamma$ is the surface tension, $T$ is the temperature, $T_c$ and $p_c$ are the critical temperature and pressure, $K$ is a constant, and $n$ is a constant equal to approximately 1.23.			
6584	temperature scale	Effect	Thermal Engineering
An assignment of numbers to temperatures in a continuous manner, such that the resulting function is single valued; it is either an empirical temperature scale, based on some convenient property of a substance or object, or it measures the absolute temperature.			
11725	psychrometric chart	Effect	Thermal Engineering
A graph each point of which represents a specific condition of a gas-vapor system (such as air and water vapor) with regard to temperature (horizontal scale) and absolute humidity (vertical scale); other characteristics of the system, such as relative humidity, wet-bulb temperature, and latent heat of vaporization, are indicated by lines on the chart.			
13890	melting point	Effect	Thermal Engineering
1. The temperature at which a solid of a pure substance changes to a liquid. Abbreviated mp. 2. For a solution of two or more components, the temperature at which the first trace of liquid appears as the solution is heated.			
31	sublime	Effect	Thermal Engineering
To change from the solid to the gaseous state without passing through the liquid phase.			
11723	steam line	Effect	Thermal Engineering
A graph of the boiling point of water as a function of pressure.			
11722	enthalpy-entropy chart	Effect	Thermal Engineering



A graph of the enthalpy of a substance versus its entropy at various values of temperature, pressure, or specific volume; useful in making calculations about a machine or process in which this substance is the working medium.

6673 Ingen-Hausz apparatus Effect Thermal Engineering

An apparatus for comparing the thermal conductivities of different conductors; specimens consisting of long wax-coated rods of equal length are placed with one end in a tank of boiling water covered with a radiation shield, and the lengths along the rods from which the wax melts are compared.

1172 ice line Effect Thermal Engineering

A graph of the freezing point of water as a function of pressure.

13889 absolute temperature Effect Thermal Engineering

1. The temperature measurable in theory on the thermodynamic temperature scale. 2. The temperature in Celsius degrees relative to the absolute zero at  $-273.16^{\circ}\text{C}$  (the Kelvin scale) or in Fahrenheit degrees relative to the absolute zero at  $-459.69^{\circ}\text{F}$  (the Rankine scale).

11718 sublimation curve Effect Thermal Engineering

A graph of the vapor pressure of a solid as a function of temperature. sublimation energy

532 adiabatic process Effect Thermal Engineering

Any thermodynamic procedure which takes place in a system without the exchange of heat with the surroundings.  
adiabatic vaporization

6870 ideal gas Effect Thermal Engineering

Also known as perfect gas. 1. A gas whose molecules are infinitely small and exert no force on each other. 2. A gas that obeys Boyle's law (the product of the pressure and volume is constant at constant temperature) and Joule's law (the internal energy is a function of the temperature alone).

362 barotropic phenomenon Effect Thermal Engineering

The sinking of a vapor beneath the surface of a liquid when the vapor phase has the greater density.

13872 fundamental interval Effect Thermal Engineering

1. The value arbitrarily assigned to the difference in temperature between two fixed points (such as the ice point and steam point) on a temperature scale, in order to define the scale. 2. The difference between the values recorded by a thermometer at two fixed points; for example, the difference between the resistances recorded by a resistance thermometer at the ice point and steam point.

7405 saturated vapor Effect Thermal Engineering

A vapor whose temperature equals the temperature of boiling at the pressure existing on it.

7406	superheated vapor	Effect	Thermal Engineering
------	-------------------	--------	---------------------

A vapor that has been heated above its boiling point.

7505	thermal ohm	Effect	Thermal Engineering
------	-------------	--------	---------------------

A unit of thermal resistance equal to the thermal resistance for which a temperature difference of 1 kelvin produces a flow of entropy of 1 watt per kelvin. Also known as fourier.

7506	thermal henry	Effect	Thermal Engineering
------	---------------	--------	---------------------

A unit of thermal inductance equal to the product of a temperature difference of 1 kelvin and a time of 1 second divided by a rate of flow of entropy of 1 watt per kelvin.

7507	thermal farad	Effect	Thermal Engineering
------	---------------	--------	---------------------

A unit of thermal capacitance equal to the thermal capacitance of a body for which an increase in entropy of 1 joule per kelvin results in a temperature rise of 1 kelvin. thermal flame safeguard

751	frigorie	Effect	Thermal Engineering
-----	----------	--------	---------------------

A unit of rate of extraction of heat used in refrigeration, equal to 1000 fifteen-degree calories per hour, or  $1.16264 \pm 0.00014$  watts.

7566	therm	Effect	Thermal Engineering
------	-------	--------	---------------------

A unit of heat energy, equal to 100,000 international table British thermal units, or approximately  $1.055 \times 10^8$  joules.

7568	thermie	Effect	Thermal Engineering
------	---------	--------	---------------------

A unit of heat energy equal to the heat energy needed to raise 1 tonne of water from 14.5°C to 15.5°C at a constant pressure of 1 standard atmosphere; equal to  $10^6$  fifteen- degrees calories or  $(4.1855 \pm 0.0005) \times 10^6$  joules. Abbreviated

7569	kilocalorie	Effect	Thermal Engineering
------	-------------	--------	---------------------

A unit of heat energy equal to 1000 calories. Abbreviated kcal. Also known as kilogram-calorie (kg-cal); large calorie (Cal).

17	molecular heat diffusion	Effect	Thermal Engineering
----	--------------------------	--------	---------------------

Transfer of heat through the motion of molecules. molecular pump

6845	comparator method	Effect	Thermal Engineering
------	-------------------	--------	---------------------

A method of determining the coefficient of linear expansion of a substance in which one measures the distance that each of two traveling microscopes must be moved in order to remain centered on scratches on a rod-shaped specimen when the temperature of the specimen is raised by a measured amount.

6105	manocryometer	Effect	Thermal Engineering
An instrument for measuring the change of a substance's melting point with change in pressure; the height of a mercury column in a U-shaped capillary supported by an equilibrium between liquid and solid in an adjoining bulb is measured, and the whole apparatus is in a thermostat.			
5322	thermodynamic temperature scale	Effect	Thermal Engineering
Any temperature scale in which the ratio of the temperatures of two reservoirs is equal to the ratio of the amount of heat absorbed from one of them by a heat engine operating in a Carnot cycle to the amount of heat rejected by this engine to the other reservoir; the Kelvin scale and the Rankine scale are examples of this type.			
5335	engine cycle	Effect	Thermal Engineering
Any series of thermodynamic phases constituting a cycle for the conversion of heat into work; examples are the Otto cycle, Stirling cycle, and Diesel cycle.			
1600	heat transfer	Effect	Thermal Engineering
The movement of heat from one body to another (gas, liquid, solid, or combinations thereof) by means of radiation, convection, or conduction.			
5470	heat source	Effect	Thermal Engineering
Any device or natural body that supplies heat.			
485	isentropic compression	Effect	Thermal Engineering
Compression which occurs without any change in entropy.			
5712	spontaneous process	Effect	Thermal Engineering
A thermodynamic process which takes place without the application of an external agency, because of the inherent properties of a system.			
5713	isobaric process	Effect	Thermal Engineering
A thermodynamic process of a gas in which the heat transfer to or from the gaseous system causes a volume change at constant pressure.			
5725	divariant system	Effect	Thermal Engineering
A system composed of only one phase, so that two variables, such as pressure and temperature, are sufficient to define its thermodynamic state.			
5727	open system	Effect	Thermal Engineering

A system across whose boundaries both matter and energy may pass. open-timbered roof

13953      heat of wetting      Effect      Thermal Engineering

1. The heat of adsorption of water on a substance. 2. The additional heat required, above the heat of vaporization of free water, to evaporate water from a substance in which it has been absorbed.

13945      free energy      Effect      Thermal Engineering

1. The internal energy of a system minus the product of its temperature and its entropy. Also known as Helmholtz free energy; Helmholtz function; Helmholtz potential; thermodynamic potential at constant volume; work function. 2. See Gibbs free energy.

6370      graybody      Effect      Thermal Engineering

An energy radiator which has a blackbody energy distribution, reduced by a constant factor, throughout the radiation spectrum or within a certain wavelength interval.

11964      thermometric fluid      Effect      Thermal Engineering

A fluid that has properties, such as a large and uniform thermal expansion coefficient, good thermal conductivity, and chemical stability, that make it suitable for use in a thermometer.

6335      equation of piezotropy      Effect      Thermal Engineering

An equation obeyed by certain fluids which states that the time rate of change of the fluid's density equals the product of a function of the thermodynamic variables and the time rate of change of the pressure.

11844      fugacity      Effect      Thermal Engineering

A function used as an analog of the partial pressure in applying thermodynamics to real systems; at a constant temperature it is proportional to the exponential of the ratio of the chemical potential of a constituent of a system divided by the product of the gas constant and the temperature, and it approaches the partial pressure as the total pressure of the gas approaches zero.

11807      permanent gas      Effect      Thermal Engineering

A gas at a pressure and temperature far from its liquid state.

11800      real gas      Effect      Thermal Engineering

A gas, as considered from the viewpoint in which deviations from the ideal gas law, resulting from interactions of gas molecules, are taken into account. Also known as imperfect gas.

6220      anomalous expansion      Effect      Thermal Engineering

An increase in the volume of a substance that results from a decrease in its temperature, such as is displayed by water at temperatures between 0 and 4 °C (32 and 39 °F).

6254      reversible process      Effect      Thermal Engineering

An ideal thermodynamic process which can be exactly reversed by making an indefinitely small change in the external conditions. Also known as quasistatic process.

6257      reverse Carnot cycle      Effect      Thermal Engineering

An ideal thermodynamic cycle consisting of the processes of the Carnot cycle reversed and in reverse order, namely, isentropic expansion, isothermal expansion, isentropic compression, and isothermal compression.

6258      Rankine cycle      Effect      Thermal Engineering

An ideal thermodynamic cycle consisting of heat addition at constant pressure, isentropic expansion, heat rejection at constant pressure, and isentropic compression; used as an ideal standard for the performance of heat-engine and heat-pump installations operating with a condensable vapor as the working fluid, such as a steam power plant.

6262      reversible engine      Effect      Thermal Engineering

An ideal engine which carries out a cycle of reversible processes.

6264      blackbody      Effect      Thermal Engineering

An ideal body which would absorb all incident radiation and reflect none. Also known as hohlraum; ideal radiator.

blackbody radiation

13909      specific heat      Effect      Thermal Engineering

1. The ratio of the amount of heat required to raise a mass of material 1 degree in temperature to the amount of 518 Sperry process heat required to raise an equal mass of a reference substance, usually water, 1 degree in temperature; both measurements are made at a reference temperature, usually at constant pressure or constant volume. 2. The quantity of heat required to raise a unit mass of homogeneous material one degree in temperature in a specified way; it is assumed that during the process no phase or chemical change occurs.

6327      thermodynamic equation of state      Effect      Thermal Engineering

An equation that relates the reversible change in energy of a thermodynamic system to the pressure, volume, and temperature.

11556      cavity radiator      Effect      Thermal Engineering

A heated enclosure with a small opening which allows some radiation to escape or enter; the escaping radiation approximates that of a blackbody.

584	diesel cycle	Effect	Thermal Engineering
An internal combustion engine cycle in which the heat of compression ignites the fuel.			
10186	reversible path	Effect	Thermal Engineering
A path followed by a thermodynamic system such that its direction of motion can be reversed at any point by an infinitesimal change in external conditions; thus the system can be considered to be at equilibrium at all points along the path.			
7579	thermal coulomb	Effect	Thermal Engineering
A unit of entropy equal to 1 joule per kelvin.			
9679	temperature	Effect	Thermal Engineering
A property of an object which determines the direction of heat flow when the object is placed in thermal contact with another object: heat flows from a region of higher temperature to one of lower temperature; it is measured either by an empirical temperature scale, based on some convenient property of a material or instrument, or by a scale of absolute temperature, for example, the Kelvin scale.			
9703	irreversible process	Effect	Thermal Engineering
A process which cannot be reversed by an infinitesimal change in external conditions.			
973	adiabatic cooling	Effect	Thermal Engineering
A process in which the temperature of a system is reduced without any heat being exchanged between the system and its surroundings.			
9733	reheating	Effect	Thermal Engineering
A process in which the gas or steam is reheated after a partial isentropic expansion to reduce moisture content. Also known as resuperheating.			
9762	thermodynamic cycle	Effect	Thermal Engineering
A procedure or arrangement in which some material goes through a cyclic process and one form of energy, such as heat at an elevated temperature from combustion of a fuel, is in part converted to another form, such as mechanical energy of a shaft, the remainder being rejected to a lower temperature sink. Also known as heat cycle.			
1081	heat of ablation	Effect	Thermal Engineering
A measure of the effective heat capacity of an ablating material, numerically the heating rate input divided by the mass loss rate which results from ablation. heat of adsorption			
10083	thermometric property	Effect	Thermal Engineering

A physical property that changes in a known way with temperature, and can therefore be used to measure temperature.

10799      heat quantity      Effect      Thermal Engineering

A measured amount of heat; units are the small calorie, normal calorie, mean calorie, and large calorie.

10114      thermal hysteresis      Effect      Thermal Engineering

A phenomenon sometimes observed in the behavior of a temperature-

10116      Ludwig-Soret effect      Effect      Thermal Engineering

A phenomenon in which a temperature gradient in a mixture of substances gives rise to a concentration gradient.

9437      reverse Brayton cycle      Effect      Thermal Engineering

A refrigeration cycle using air as the refrigerant but with all system pressures above the ambient. Also known as dense-air refrigeration cycle.

1341      first-order transition      Effect      Thermal Engineering

A change in state of aggregation of a system accompanied by a discontinuous change in enthalpy, entropy, and volume at a single temperature and pressure.

9430      Stirling cycle      Effect      Thermal Engineering

A regenerative thermodynamic power cycle using two isothermal and two constant volume phases.

13408      homomorphous transformation      Effect      Thermal Engineering

A change in the values of the thermodynamic variables of a system in which none of the component substances undergoes a change of state.

10214      critical exponent      Effect      Thermal Engineering

A parameter  $n$  that characterizes the temperature dependence of a thermodynamic property of a substance near its critical point; the temperature dependence has the form  $|T - T_c|^n$ , where  $T$  is the temperature and  $T_c$  is the critical

10217      heat equation      Effect      Thermal Engineering

A parabolic secondorder differential equation for the temperature of a substance in a region where no heat source exists:

$\frac{dt}{dj} = (k/pc)(\frac{d^2t}{dx^2} + \frac{d^2t}{dy^2} + \frac{d^2t}{dz^2})$ , where  $x$ ,  $y$ , and  $z$  are space coordinates,  $T$  is the time,  $t(x,y,z,j)$  is the temperature,  $k$  is the thermal conductivity of the body,  $p$  is its density, and  $c$  is its specific heat; this equation is fundamental to the study of heat flow in bodies. Also known as Fourier heat equation; heat flow equation.

13407      heteromorphic transformation      Effect      Thermal Engineering

A change in the values of the thermodynamic variables of a system in which one or more of the component substances

also undergo a change of state.

13406      transition      Effect      Thermal Engineering

A change of a substance from one of the three states of matter to another. transitional fit

13405      thermodynamic process      Effect      Thermal Engineering

A change of any property of an aggregation of matter and energy, accompanied by thermal effects. thermodynamic

13403      second-order transition      Effect      Thermal Engineering

A change of state through which the free energy of a substance and its first derivatives are continuous functions of temperature and pressure, or other corresponding variables.

13402      isentropic process      Effect      Thermal Engineering

A change that takes place without any increase or decrease in entropy, such as a process which is both reversible and adiabatic.

10612      method of mixtures      Effect      Thermal Engineering

A method of determining the heat of fusion of a substance whose specific heat is known, in which a known amount of the solid is combined with a known amount of the liquid in a calorimeter, and the decrease in the liquid temperature during melting of the solid is measured.

10607      differential thermal analysis      Effect      Thermal Engineering

A method of determining the temperature at which thermal reactions occur in a material undergoing continuous heating to elevated temperatures; also involves a determination of the nature and intensity of such reactions.

13394      internal energy      Effect      Thermal Engineering

A characteristic property of the state of a thermodynamic system, introduced in the first law of thermodynamics; it includes intrinsic energies of individual molecules, kinetic energies of internal motions, and contributions from interactions between molecules, but excludes the potential or kinetic energy of the system as a whole; it is sometimes erroneously referred to as heat energy.

115      thermodynamic probability      Effect      Thermal Engineering

Under specified conditions, the number of equally likely states in which a substance may exist; the thermodynamic probability  $Q$ , is related to the entropy  $S$  by  $S = k \ln Q$ , where  $k$  is Boltzmann's constant.

10120      order of phase transition      Effect      Thermal Engineering

A phase transition in which there is a latent heat and an abrupt change in properties, such as in density, is a first-order transition; if there is not such a change, the order of the transition is one greater than the lowest derivative of such



properties with respect to temperature which has a discontinuity.

8124	lambda point	Effect	Thermal Engineering
A temperature at which the specific heat of a substance has a sharply peaked maximum, observed in many second- order transitions.			
5376	thermodynamic function of state	Effect	Thermal Engineering
Any of the quantities defining the thermodynamic state of a substance in thermodynamic equilibrium; for a perfect gas, the pressure, temperature, and density are the fundamental thermodynamic variables, any two of which are, by the equation of state, sufficient to specify the state. Also known as state parameter; state variable; thermodynamic variable.			
13708	nonblackbody	Effect	Thermal Engineering
A body that reflects some fraction of the radiation incident upon it; all real bodies are of this nature.			
8039	saturation specific humidity	Effect	Thermal Engineering
A thermodynamic function of state; the value of the specific humidity of saturated air at the given temperature and			
8040	thetagram	Effect	Thermal Engineering
A thermodynamic diagram with coordinates of pressure and temperature, both on a linear scale.			
8042	vapor cycle	Effect	Thermal Engineering
A thermodynamic cycle, operating as a heat engine or a heat pump, during which the working substance is in, or passes through, the vapor state.			
8043	closed cycle	Effect	Thermal Engineering
A thermodynamic cycle in which the thermodynamic fluid does not enter or leave the system, but is used over and over again.			
8044	open cycle	Effect	Thermal Engineering
A thermodynamic cycle in which new mass enters the boundaries of the system and spent exhaust leaves it; the automotive engine and the gas turbine illustrate this process.			
8045	Otto cycle	Effect	Thermal Engineering
A thermodynamic cycle for the conversion of heat into work, consisting of two isentropic phases interspersed between two constant-volume phases. Also known as spark-ignition combustion cycle.			
8046	Brayton cycle	Effect	Thermal Engineering
A thermodynamic cycle consisting of two constant-pressure processes interspersed with two constant-entropy			

processes. Also known as complete-expansion diesel cycle; Joule cycle.

8054      Prevost's theory      Effect      Thermal Engineering

A theory according to which a body is constantly exchanging heat with its surroundings, radiating an amount of energy which is independent of its surroundings, and increasing or decreasing its temperature depending on whether it absorbs more radiation than it emits, or vice versa.

8094      equivalent temperature      Effect      Thermal Engineering

A term used in British engineering for that temperature of a uniform enclosure in which, in still air, a sizable blackbody at 75°F (23.9°C) would lose heat at the same rate as in the environment.

9453      adiabatic compression      Effect      Thermal Engineering

A reduction in volume of a substance without heat flow, in or out.

8122      monochromatic temperature scale      Effect      Thermal Engineering

A temperature scale based upon the amount of power radiated from a blackbody at a single wavelength.

7599      Also known as thermal volt.      Effect      Thermal Engineering

A unit of absolute temperature equal to 1/273.16 of the absolute temperature of the triple point of water. Symbolized K. Formerly known as degree Kelvin.

8216      univariant system      Effect      Thermal Engineering

A system which has only one degree of freedom according to the phase rule.

833      diathermous envelope      Effect      Thermal Engineering

A surface enclosing a thermodynamic system in equilibrium that is not an adiabatic envelope; intuitively, this means that heat can flow through the surface.

8332      adiabatic envelope      Effect      Thermal Engineering

A surface enclosing a thermodynamic system in an equilibrium which can be disturbed only by long-range forces or by motion of part of the envelope; intuitively, this means that no heat can flow through the surface.

8356      thermal conductor      Effect      Thermal Engineering

A substance with a relatively high thermal conductivity.

1125      isothermal layer      Effect      Thermal Engineering

A layer of fluid, all points of which have the same temperature. isothermal magnetization

8526      international temperature scale      Effect      Thermal Engineering

A standard temperature scale, adopted in 1990, that approximates the thermodynamic scale, based on assigned temperature values of 17 thermodynamic equilibrium fixed points and prescribed thermometers for interpolation between them. Abbreviated ITS-90.

13518      isothermal calorimeter      Effect      Thermal Engineering

A calorimeter in which the heat received by a reservoir, containing a liquid in equilibrium with its solid at the melting point or with its vapor at the boiling point, is determined by the change in volume of the liquid.

8845      absolute temperature scale      Effect      Thermal Engineering

A scale with which temperatures are measured relative to absolute zero. Also known as absolute scale.

11193      isentrope      Effect      Thermal Engineering

A line of equal or constant entropy.

9054      refrigeration cycle      Effect      Thermal Engineering

A sequence of thermodynamic processes whereby heat is withdrawn from a cold body and expelled to a hot body.

9057      gas cycle      Effect      Thermal Engineering

A sequence in which a gaseous fluid undergoes a series of thermodynamic phases, ultimately returning to its original

9420      temperature bath      Effect      Thermal Engineering

A relatively large volume of a homogeneous substance held at constant temperature, so that an object placed in thermal contact with it is maintained at the same temperature.

8120      Fahrenheit scale      Effect      Thermal Engineering

A temperature scale; the temperature in degrees Fahrenheit ( $^{\circ}\text{F}$ ) is the sum of 32 plus  $9/5$  the temperature in degrees Celsius; water at 1 atmosphere (101,325 pascals) pressure freezes very near  $32^{\circ}\text{F}$  and boils very near  $212^{\circ}\text{F}$ .

2449      minimum resolvable temperature      Effect      Thermal Engineering

The change in equivalent blackbody temperature that corresponds to a change in radiance which will produce a just barely resolvable change in the output of an infrared imaging device, taking into account the characteristics of the device, the display, and the observer. Abbreviated MRTD.

2107      heat radiation      Effect      Thermal Engineering

The energy radiated by solids, liquids, and gases in the form of electromagnetic waves as a result of their temperature.

459      boil-off      Effect      Thermal Engineering

The vaporization of a liquid, such as liquid oxygen or liquid hydrogen, as its temperature reaches its boiling point under

conditions of exposure, as in the tank of a rocket being readied for launch.

2218      thermal potential difference      Effect      Thermal Engineering

The difference between the thermodynamic temperatures of two points.

2220      wall superheat      Effect      Thermal Engineering

The difference between the temperature of a surface and the saturation temperature (boiling point at the ambient pressure) of an adjacent liquid that is heated by the surface.

2228      heat of mixing      Effect      Thermal Engineering

The difference between the enthalpy of a mixture and the sum of the enthalpies of its components at the same pressure and temperature.

2334      film cooling      Effect      Thermal Engineering

The cooling of a body or surface, such as the inner surface of a rocket combustion chamber, by maintaining a thin fluid layer over the affected area.

2339      degradation      Effect      Thermal Engineering

The conversion of energy into forms that are increasingly difficult to convert into work, resulting from the general tendency of entropy to increase.

2344      volatilization      Effect      Thermal Engineering

The conversion of a chemical substance from a liquid or solid state to a gaseous or vapor state by the application of heat, by reducing pressure, or by a combination of these processes. Also known as vaporization.

2358      gas constant      Effect      Thermal Engineering

The constant of proportionality appearing in the equation of state of an ideal gas, equal to the pressure of the gas times its molar volume divided by its temperature.

2367      positive temperature coefficient      Effect      Thermal Engineering

The condition wherein the resistance, length, or some other characteristic of a substance increases when temperature increases.

2372      heat death      Effect      Thermal Engineering

The condition of any isolated system when its entropy reaches a maximum, in which matter is totally disordered and at a uniform temperature, and no energy is available for doing work.

3306      supercritical      Effect      Thermal Engineering

Property of a gas which is above its critical pressure and temperature. supercritical fluid

2448      noise equivalent temperature      Effect      Thermal Engineering

The change in equivalent blackbody temperature that corresponds to a change in radiance which will produce a signal-to-noise ratio of 1 in an infrared imaging device. Abbreviated NETD.

2095      heat balance heat balance      Effect      Thermal Engineering

The equilibrium which is known to exist when all sources of heat gain and loss for a given region or body are accounted for heat budget

2453      suspended transformation      Effect      Thermal Engineering

The cessation of change before true equilibrium is reached, or the failure of a system to change immediately after a change in conditions, such as in supercooling and other forms of metastable equilibrium.

2503      steam point      Effect      Thermal Engineering

The boiling point of pure water whose isotopic composition is the same as that of sea water at standard atmospheric pressure; it is assigned a value of 100 °C on the International Practical Temperature Scale of 1968.

12955      stem correction      Effect      Thermal Engineering

A correction which must be made in reading a thermometer in which part of the stem, and the thermometric fluid within it, is at a temperature which differs from the temperature being measured.

2655      heat flux      Effect      Thermal Engineering

The amount of heat transferred across a surface of unit area in a unit time.

2765      unavailable energy      Effect      Thermal Engineering

That part of the energy which, when an irreversible process takes place, is initially in a form completely available for work and is converted to a form completely unavailable for work.

3018      superheat      Effect      Thermal Engineering

Sensible heat in a gas above the amount needed to maintain the gas phase.

3028      DesignatedG.      Effect      Thermal Engineering

See thermal conductance.

12888      cooling curve      Effect      Thermal Engineering

A curve obtained by plotting time against temperature for a solidliquid mixture cooling under constant conditions.

12884      critical isotherm      Effect      Thermal Engineering

A curve showing the relationship between the pressure and volume of a gas at its critical temperature.

548      isothermal process      Effect      Thermal Engineering

Any constant temperature process, such as expansion or compression of a gas, accompanied by heat addition or removal from the system at a rate just adequate to maintain the constant temperature.

3294      thermodynamic equilibrium      Effect      Thermal Engineering

Property of a system which is in mechanical, chemical, and thermal equilibrium.

5319      isothermal transformation      Effect      Thermal Engineering

Any transformation of a substance which takes place at a constant temperature.

2375      isothermal equilibrium      Effect      Thermal Engineering

The condition in which two or more systems are at the same temperature, so that no heat flows between them.

14390      phase diagram      Effect      Thermal Engineering

1. A graph showing the pressures at which phase transitions between different states of a pure compound occur, as a function of temperature. 2. A graph showing the temperatures at which transitions between different phases of a binary system occur, as a function of the relative concentrations of its components.

1746      log-mean temperature difference      Effect      Thermal Engineering

The log-mean temperature difference  $TLM = (T_2 - T_1) / \ln T_2 / T_1$ , where  $T_2$  and  $T_1$  are the absolute (K or °R) temperatures of the two extremes being averaged; used in heat transfer calculations in which one fluid is cooled or heated by a second held separate by pipes or process vessel walls.

1825      first law of thermodynamics      Effect      Thermal Engineering

The law that heat is a form of energy, and the total amount of energy of all kinds in an isolated system is constant; it is an application of the principle of conservation of energy.

1859      specific energy      Effect      Thermal Engineering

The internal energy of a substance per unit mass.

1885      coefficient of linear expansion      Effect      Thermal Engineering

The increment of length of a solid in a unit of length for a rise in temperature of 1 ° at constant pressure.

1886      coefficient of cubical expansion      Effect      Thermal Engineering

The increment in volume of a unit volume of solid, liquid, or gas for a rise of temperature of 1 ° at constant pressure. Also known as coefficient of expansion; coefficient of thermal expansion; coefficient of volumetric expansion; expansion

coefficient; expansivity.

1887	coefficient of superficial expansion	Effect	Thermal Engineering
------	--------------------------------------	--------	---------------------

The increment in area of a solid surface per unit of area for a rise in temperature of 1° at constant pressure. Also known as superficial expansivity.

1892	standard free-energy increase	Effect	Thermal Engineering
------	-------------------------------	--------	---------------------

The increase in Gibbs free energy in a chemical reaction, when both the reactants and the products of the reaction are in their standard states. standard gage

1893	heat of aggregation	Effect	Thermal Engineering
------	---------------------	--------	---------------------

The increase in enthalpy when an aggregate of matter, such as a crystal, is formed at constant pressure.

1894	heat of crystallization	Effect	Thermal Engineering
------	-------------------------	--------	---------------------

The increase in enthalpy when 1 mole of a substance is transformed into its crystalline state at constant pressure.

1895	heat of solidification	Effect	Thermal Engineering
------	------------------------	--------	---------------------

The increase in enthalpy when 1 mole of a solid is formed from a liquid or, less commonly, a gas at constant pressure and temperature.

1896	heat of transformation	Effect	Thermal Engineering
------	------------------------	--------	---------------------

The increase in enthalpy of a substance when it undergoes some phase change at constant pressure and temperature.

1897	heat of sublimation	Effect	Thermal Engineering
------	---------------------	--------	---------------------

The increase in enthalpy accompanying the conversion of 1 mole, or unit mass, of a solid to a vapor at constant pressure and temperature. Also known as latent heat of sublimation.

210	virtual entropy	Effect	Thermal Engineering
-----	-----------------	--------	---------------------

The entropy of a system, excluding that due to nuclear spin. Also known as practical entropy.

1899	heat of condensation	Effect	Thermal Engineering
------	----------------------	--------	---------------------

The increase in enthalpy accompanying the conversion of 1 mole of vapor into liquid at constant pressure and

460	saturation vapor pressure	Effect	Thermal Engineering
-----	---------------------------	--------	---------------------

The vapor pressure of a thermodynamic system, at a given temperature, wherein the vapor of a substance is in equilibrium with a plane surface of that substance's pure liquid or solid phase.

1932	low heat value	Effect	Thermal Engineering
------	----------------	--------	---------------------

The heat value of a combustion process assuming that none of the water vapor resulting from the process is condensed out, so that its latent heat is not available. Also known as lower heating value; net heating value.

1933      local coefficient of heat transfer      Effect      Thermal Engineering

The heat transfer coefficient at a particular point on a surface, equal to the amount of heat transferred to an infinitesimal area of the surface at the point by a fluid passing over it, divided by the product of this area and the difference between the temperatures of the surface and the fluid.

46      sublimation pressure      Effect      Thermal Engineering

The vapor pressure of a solid.

1936      standard heat of formation      Effect      Thermal Engineering

The heat needed to produce one mole of a compound from its elements in their standard state. standard hole

1937      thermal conductivity      Effect      Thermal Engineering

The heat flow across a surface per unit area per unit time, divided by the negative of the rate of change of temperature with distance in a direction perpendicular to the surface. Also known as coefficient of conductivity; heat conductivity.

1938      molecular heat      Effect      Thermal Engineering

The heat capacity per mole of a substance.

2005      thermal transpiration      Effect      Thermal Engineering

The formation of a pressure gradient in gas inside a tube when there is a temperature gradient in the gas and when the mean free path of molecules in the gas is a significant fraction of the tube diameter.

2007      film condensation      Effect      Thermal Engineering

The formation of a continuous film of liquid on a wall in contact with a vapor, when the wall is cooled below the local vapor saturation temperature and the liquid wets the cold surface.

2030      heat conduction      Effect      Thermal Engineering

The flow of thermal energy through a substance from a higher-to a lower-temperature region.

208      apparent expansion      Effect      Thermal Engineering

The expansion of a liquid with temperature, as measured in a graduated container without taking into account the container's expansion.

2084      eddy conductivity      Effect      Thermal Engineering

The exchange coefficient for eddy heat conduction.



3299	thermal equilibrium	Effect	Thermal Engineering
Property of a system all parts of which have attained a uniform temperature which is the same as that of the system's surroundings.			
1898	heat of fusion	Effect	Thermal Engineering
The increase in enthalpy accompanying the conversion of 1 mole, or a unit mass, of a solid to a liquid at its melting point at constant pressure and temperature.			
4506	isenthalpic expansion	Effect	Thermal Engineering
Expansion which takes place without any change in enthalpy. isenthalpic process			
508	diabatic	Effect	Thermal Engineering
Athermodynamic change of state of a system in which there is a transfer of 155 diagnostics heat across the boundaries of the system. Also known as nonadiabatic diagnostics			
442	equivalent blackbody temperature	Effect	Thermal Engineering
For a surface, the temperature of a blackbody which emits the same amount of radiation per unit area as does the			
5080	air-standard cycle	Effect	Thermal Engineering
Athermodynamic cycle in which the working fluid is considered to be a perfect gas with such properties of air as a volume of 12.4 cubic feet per pound at 14.7 pounds per square inch (approximately 0.7756 cubic meter per kilogram at 101.36 kilopascals) and 492°R and a ratio of specific heats of 1:4.			
3348	heat transport	Effect	Thermal Engineering
Process by which heat is carried past a fixed point or across a fixed plane, as in a warm current.			
4964	film boiling	Effect	Thermal Engineering
Boiling in which a continuous film of vapor forms at the hot surface of the container holding the boiling liquid, reducing heat transfer across the surface.			
3292	continuity of state	Effect	Thermal Engineering
Property of a transition between two states of matter, as between gas and liquid, during which there are no abrupt changes in physical properties.			
4942	fluid distributor flowing-temperature	Effect	Thermal Engineering
Calculation correction factor for gases flowing at temperatures other than that for which a flow equation is valid, that is, other than 60°F (15.5°C).			

4429	virial coefficients	Effect	Thermal Engineering
For a given temperature $T$ , one of the coefficients in the expansion of $P/RT$ in inverse powers of the molar volume, where $P$ is the pressure and $R$ is the gas constant.			
443	temperature gradient	Effect	Thermal Engineering
For a given point, a vector whose direction is perpendicular to an isothermal surface at the point, and whose magnitude equals the rate of change of temperature in this direction.			
4434	film coefficient	Effect	Thermal Engineering
For a fluid confined in a vessel, the rate of flow of heat out of the fluid, per unit area of vessel wall divided by the difference between the temperature in the interior of the fluid and the temperature at the surface of the wall. Also known as convection coefficient.			
4789	natural convection	Effect	Thermal Engineering
Convection in which fluid motion results entirely from the presence of a hot body in the fluid, causing temperature and hence density gradients to develop, so that the fluid moves under the influence of gravity.			
4453	radial heat flow	Effect	Thermal Engineering
Flow of heat between two coaxial cylinders maintained at different temperatures; used to measure thermal conductivities of gases.			
394	adhesional work	Effect	Thermal Engineering
The work required to separate a unit area of a surface at which two substances are in contact. Also known as work of adhesion.			
4854	isothermal compression	Effect	Thermal Engineering
Compression at constant temperature.			
4507	isentropic expansion	Effect	Thermal Engineering
Expansion which occurs without any change in entropy. isentropic flow			
4508	isothermal expansion	Effect	Thermal Engineering
Expansion of a substance while its temperature is held constant. isothermal flow			
4527	Kirchhoff's equations	Effect	Thermal Engineering
Equations which state that the partial derivative of the change of enthalpy (or of internal energy) during a reaction, with respect to temperature, at constant pressure (or volume) equals the change in heat capacity at constant pressure (or			

volume).

4533      Donohue equation      Effect      Thermal Engineering

Equation used to determine the heat-transfer film coefficient for a fluid on the outside of a baffled shell-and-tube heat exchanger.

4542      heat      Effect      Thermal Engineering

Energy in transit due to a temperature difference between the source from which the energy is coming and a sink toward which the energy is going; other types of energy in transit are called work.

484      dropwise condensation      Effect      Thermal Engineering

Condensation of a vapor on a surface in which the condensate forms into drops.

12299      Prandtl number      Effect      Thermal Engineering

A dimensionless number used in the study of forced and free convection, equal to the dynamic viscosity times the specific heat at constant pressure divided by the thermal conductivity. Symbolized  $N_{Pr}$ .

12295      Stefan number      Effect      Thermal Engineering

A dimensionless number used in the study of radiant heat transfer, equal to the Stefan-Boltzmann constant times the cube of the temperature times the thickness of a layer divided by the layer's thermal conductivity.

12294      Graetz number      Effect      Thermal Engineering

A dimensionless number used in the study of streamline flow, equal to the mass flow rate of a fluid times its specific heat at constant pressure divided by the product of its thermal conductivity and a characteristic length. Also spelled Gratz

4449      homenergeticflow      Effect      Thermal Engineering

Fluid flow in which the sum of kinetic energy, potential energy, and enthalpy per unit mass is the same at all locations in the fluid and at all times.

426      heat flow      Effect      Thermal Engineering

Heat thought of as energy flowing from one substance to another; quantitatively, the amount of heat transferred in a unit time. Also known as heat transmission.

3524      degree      Effect      Thermal Engineering

One of the units of temperature or temperature difference in any of various temperature scales, such as the Celsius, Fahrenheit, and Kelvin temperature scales (the Kelvin degree is now known as the kelvin).

3565      thermodynamic potential      Effect      Thermal Engineering

One of several extensive quantities which are determined by the instantaneous state of a thermodynamic system, independent of its previous history, and which are at a minimum when the system is in thermodynamic equilibrium under specified conditions.

3593      primary phase region      Effect      Thermal Engineering

On a phase diagram, the locus of all compositions having a common primary phase.

3615      thermal      Effect      Thermal Engineering

Of or concerning heat. thermal ammeter See hot-wire ammeter.

3618      isobaric      Effect      Thermal Engineering

Of equal or constant pressure, with respect to either space or time.

3707      explosion method      Effect      Thermal Engineering

Method of measuring the specific heat of a gas at constant volume by enclosing the gas with an explosive mixture, whose heat of reaction is known, in a chamber closed with a corrugated steel membrane which acts as a manometer, and by deducing the maximum temperature reached on ignition of the mixture from the pressure change.

3745      thermal conductimetry      Effect      Thermal Engineering

Measurement of thermal conductivities.

3856      thermodynamic principles      Effect      Thermal Engineering

Laws governing the conversion of energy from one form to another.

3916      adiabatic expansion      Effect      Thermal Engineering

Increase in volume without heat flow, in or out.

3917      heat of cooling      Effect      Thermal Engineering

Increase in enthalpy during cooling of a system at constant pressure, 266 heavy force fit resulting from an internal change such as an allotropic transformation.

4417      liquidus line      Effect      Thermal Engineering

For a two-component system, a curve on a graph of temperature versus concentration which connects temperatures at which fusion is completed as the temperature is raised.

425      superheating      Effect      Thermal Engineering

Heating of a substance above the temperature at which a change of state would ordinarily take place without such a change of state occurring, for example, the heating of a liquid above its boiling point without boiling taking place; this

results in a metastable state.

1408	interface resistance	Effect	Thermal Engineering
------	----------------------	--------	---------------------

1. Impairment of heat flow caused by the imperfect contact between two materials at an interface. 2. Quantitatively, the temperature difference across the interface divided by the heat flux through it.

4263	radioactive heat	Effect	Thermal Engineering
------	------------------	--------	---------------------

Heat produced within a medium as a result of absorption of radiation from decay of radioisotopes in the medium, such as thorium-232, potassium-40, uranium-

4264	thermal value	Effect	Thermal Engineering
------	---------------	--------	---------------------

Heat produced by combustion, usually expressed in calories per gram or British thermal units per pound.

4265	heat of compression	Effect	Thermal Engineering
------	---------------------	--------	---------------------

Heat generated when air is compressed.

4266	forced convection	Effect	Thermal Engineering
------	-------------------	--------	---------------------

Heat convection in which fluid motion is maintained by some external agency.

4267	steady-state conduction	Effect	Thermal Engineering
------	-------------------------	--------	---------------------

Heat conduction in which the temperature and heat flow at each point does not change with time. steady-state creep See secondary creep.

4268	high heat	Effect	Thermal Engineering
------	-----------	--------	---------------------

Heat absorbed by the cooling medium in a calorimeter when products of combustion are cooled to the initial atmospheric (ambient) temperature.

5300	thermodynamic system	Effect	Thermal Engineering
------	----------------------	--------	---------------------

Apart of the physical world as described by its thermodynamic properties.

4283	isentropic	Effect	Thermal Engineering
------	------------	--------	---------------------

Having constant entropy; at constant entropy.

4356	entropy	Effect	Thermal Engineering
------	---------	--------	---------------------

Function of the state of a thermodynamic system whose change in any differential reversible process is equal to the heat absorbed by the system from its surroundings divided by the absolute temperature of the system.

4426	vapor pressure	Effect	Thermal Engineering
------	----------------	--------	---------------------

For a liquid or solid, the pressure of the vapor in equilibrium with the liquid or solid.

4137	coefficient of performance	Effect	Thermal Engineering
In a refrigeration cycle, the ratio of the heat energy extracted by the heat engine at the low temperature to the work supplied to operate the cycle; when used as a heating device, it is the ratio of the heat delivered in the high-temperature coils to the work supplied.			
1819	Gay-Lussac's second law	Important Law	Thermal Engineering
The law that the internal energy of an ideal gas is independent of its volume.			
2100	third law of thermodynamics	Important Law	Thermal Engineering
The entropy of all perfect crystalline solids is zero at absolute zero temperature.			
796	absolute zero	Important Law	Thermal Engineering
The temperature of - 273.16°C, or - 459.69°F, or 0 K, thought to be the temperature at which molecular motion vanishes and a body would have no heat energy.			
376	Newton's law of cooling	Important Law	Thermal Engineering
The law that the rate of heat flow out of an object by both natural convection and radiation is proportional to the temperature difference between the object and its environment, and to the surface area of the object.			
397	external work	Law	Thermal Engineering
The work done by a system in expanding against forces exerted from outside.			
392	Dupre equation	Law	Thermal Engineering
The work WLS done 179 durability by adhesion at a gas-solid-liquid interface, expressed in terms of the surface tensions -y of the three phases, is $WLS = -y_{GS} + -y_{GL} - -y_{LS}$ .			
377	sensible-heat flow	Law	Thermal Engineering
The heat given up or absorbed by a body upon being cooled or heated, as the result of the body's ability to hold heat; excludes latent heats of fusion and vaporization.			
366	differential thermogravimetric analysis	Law	Thermal Engineering
Thermal analysis in which the rate of material weight change upon heating versus temperature is plotted; used to simplify reading of weight-versus-temperature thermogram peaks that occur close together.			
360	blackbody temperature	Law	Thermal Engineering
The temperature of a blackbody that emits the same amount of heat radiation per unit area as a given object; measured by a total radiation pyrometer Also known as brightness temperature.			

645	Maxwell equal-area rule	Law	Thermal Engineering
<p>At temperatures for which the theoretical isothermal of a substance, on a graph of pressure against volume, has a portion with positive slope (as occurs in a substance with liquid and gas phases obeying the van der Waals equation), a horizontal line drawn at the equilibrium vapor pressure and connecting two parts of the isothermal with negative slope has the property that the area between the horizontal and the part of the isothermal above it is equal to the area between the horizontal and the part of the isothermal below it.</p>			
513	emittance	Law	Thermal Engineering
<p>The power radiated per unit area of a radiating surface. Also known as emissive power; radiating power.</p>			
103	Celsius degree	Law	Thermal Engineering
<p>Unit of temperature interval or difference equal to the kelvin.</p>			
812	Kelvin absolute temperature scale	Law	Thermal Engineering
<p>A temperature scale in which the ratio of the temperatures of two reservoirs is equal to the ratio of the amount of heat absorbed from one of them by a heat engine operating in a Carnot cycle to the amount of heat rejected by this engine to the other reservoir; the temperature of the triple point of water is defined as 273.16 K. Also known as Kelvin temperature</p>			
9677	Carnot number	Law	Thermal Engineering
<p>A property of two heat sinks, equal to the Carnot efficiency of an engine operating between them.</p>			
7565	pz See pieze. 434 Q Q	Law	Thermal Engineering
<p>A unit of heat energy, equal to 1018 British thermal units, or approximately <math>1.055 \times 10^{21}</math> joules.</p>			
7567	centigrade heat unit	Law	Thermal Engineering
<p>A unit of heat energy, equal to 0.01 of the quantity of heat needed to raise 1 pound of air-free water from 0 to 100°C at a constant pressure of 1 standard atmosphere; equal to 1900.44 joules. Symbolized CHU; (more correctly) CHU<sub>mean</sub>.</p>			
7570	mayer	Law	Thermal Engineering
<p>A unit of heat capacity equal to the heat capacity of a substance whose temperature is raised 1°C by 1 joule.</p>			
7578	clausius	Law	Thermal Engineering
<p>A unit of entropy equal to the increase in entropy associated with the absorption of 1000 international table calories of heat at a temperature of 1 K, or to 4186.8 joules per kelvin.</p>			
7127	calorie	Law	Thermal Engineering
<p>Abbreviated cal; often designated c. 1. A unit of heat energy, equal to 4.1868 joules. Also known as International Table</p>			

calorie (IT calorie). 2. A unit of energy, equal to the heat required to raise the temperature of 1 gram of water from 14.5° to 15.5°C at a constant pressure of 1 standard atmosphere; equal to  $4.1855 \pm 0.0005$  joules. Also known as fifteen-degrees calorie; gram-calorie (g-cal); small calorie. 3. A unit of heat energy equal to 4.184 joules; used in thermochemistry Also known as thermochemical calorie.

8047      Rossby diagram      Law      Thermal Engineering

A thermodynamic 468 rotary furnace diagram, named after its designer, with mixing ratio as abscissa and potential temperature as ordinate; lines of constant equivalent potential temperature are added.

6960      Rayleigh number 2      Law      Thermal Engineering

Adimensionless number used in studying free convection, equal to the product of the Grashof number and the Prandtl number. Symbolized  $R^2$ .

8123      Curle scale of temperature      Law      Thermal Engineering

A temperature scale based on the susceptibility of a paramagnetic substance, assuming that it obeys Curie's law; used at temperatures below about 1 kelvin.

8572      Poynting's law      Law      Thermal Engineering

A special case of the Clapeyron equation, in which the fluid is removed as fast as it forms, so that its volume may be ignored.

8849      Rankine temperature scale      Law      Thermal Engineering

A scale of absolute temperature; the temperature in degrees Rankine ( $^{\circ}R$ ) is equal to  $9/5$  of the temperature in kelvins and to the temperature in degrees Fahrenheit plus 459.67.

885      Dalton's temperature scale      Law      Thermal Engineering

A scale for measuring temperature such that the absolute temperature  $T$  is given in terms of the temperature on the Dalton scale  $T$  by  $T = 273.15(373.15/273.15)T/100$ .

9037      Onsager reciprocal relations      Law      Thermal Engineering

A set of conditions which state that the matrix, whose elements express various fluxes of a system (such as diffusion and heat conduction) as linear functions of the various conjugate affinities (such as mass and temperature gradients) for systems close to equilibrium, is symmetric when certain definitions are chosen for these fluxes on stream

6294      Ritchie's experiment      Law      Thermal Engineering

An experiment that uses a Leslie cube and a differential air thermometer to demonstrate that the emissivity of a surface is proportional to its absorptivity.



7580	Q unit	Law	Thermal Engineering
A unit of energy, used in measuring the heat energy of fuel reserves, equal to 1018 British thermal units, or approximately 1.055 X 1021 joules.			
6337	Kelvin equation	Law	Thermal Engineering
An equation giving the increase in vapor pressure of a substance which accompanies an increase in curvature of its surface; the equation describes the greater rate of evaporation of a small liquid droplet as compared to that of a larger one, and the greater solubility of small solid particles as compared to that of larger particles.			
6329	Ostwald's adsorption isotherm	Law	Thermal Engineering
An equation stating that at a constant temperature the weight of material adsorbed on an adsorbent dispersed through a gas or solution, per unit weight of adsorbent, is proportional to the concentration of the adsorbent raised to some constant power.			
6330	Duhem-Margules equation	Law	Thermal Engineering
An equation showing the relationship between the two constituents of a liquid-vapor system and $d \ln p_A$ $d \ln p_B$ their partial vapor pressures: $= d \ln x_A d \ln x_B$ where $x_A$ and $x_B$ are the mole fractions of the two constituents, and $p_A$ and $p_B$ are the partial vapor pressures.			
633	Mie-Gruneisen equation	Law	Thermal Engineering
An equation of state particularly useful at high pressure, which states that the volume of a system times the difference between the pressure and the pressure at absolute zero equals the product of a number which depends only on the volume times the difference between the internal energy and the internal energy at absolute zero.			
6332	Keyes equation	Law	Thermal Engineering
An equation of state of a gas which is designed to correct the van der Waals equation for the effect of surrounding molecules on the term representing the volume of a molecule.			
6333	Clausius equation	Law	Thermal Engineering
An equation of state in reference to gases which applies a correction to the van der Waals equation: $104$ clearance volume $(V - nb) = nRT$ , where $P$ is the pressure, $T$ the temperature, $V$ the volume of the gas, $n$ the number of moles in the gas, $R$ the gas constant, $a$ depends only on temperature, $b$ is a constant, and $c$ is a function of $a$ and $b$ .			
7129	British thermal unit	Law	Thermal Engineering
Abbreviated Btu.			
6336	Clausius-Clapeyron equation	Law	Thermal Engineering

An equation governing phase transitions of a substance,  $dp/dT = \Delta H / (T \Delta V)$ , in which  $p$  is the pressure,  $T$  is the temperature at which the phase transition occurs,  $\Delta H$  is the change in heat content (enthalpy), and  $\Delta V$  is the change in volume during the transition. Also known as Clapeyron- Clausius equation; Clapeyron equation.

10117      Leidenfrost's phenomenon      Law      Thermal Engineering

A phenomenon in which a liquid dropped on a surface that is above a critical temperature becomes insulated from the surface by a layer of vapor, and does not wet the surface as a result.

6340      Biot-Fourier equation      Law      Thermal Engineering

An equation for heat conduction which states that the rate of change of temperature at any point divided by the thermal diffusivity equals the Laplacian of the temperature.

6393      Ramsay-Young rule      Law      Thermal Engineering

An empirical relationship which states that the ratio of the absolute temperatures at which two chemically similar liquids have the same vapor pressure is independent of this vapor pressure.

6399      Dieterici equation of state      Law      Thermal Engineering

An empirical equation of state for gases,  $p(v - b) = RT \exp(-a/RTv)$ , where  $p$  is the pressure,  $T$  is the absolute temperature,  $v$  is the molar volume,  $R$  is the gas constant, and  $a$  and  $b$  are constants characteristic of the substance under consideration.

6504      Ramsay-Shields-Eotvos equation      Law      Thermal Engineering

An elaboration of the Eotvos rule which states that at temperatures not too near the critical temperature, the molar surface energy of a liquid is proportional to  $(t_c - t)^{2/3}$  K, where  $t$  is the temperature and  $t_c$  is the critical temperature.

664      Kirchhoff vapor pressure formula      Law      Thermal Engineering

An approximate formula for the variation of vapor pressure  $p$  with temperature  $T$ , valid over a limited temperature range; it is  $\ln p = A - B/T - C \ln T$ , where  $A$ ,  $B$ , and  $C$  are constants.

6959      Rayleigh number      Law      Thermal Engineering

A dimensionless number used in the study of combined free and forced convection in vertical tubes, equal to Rayleigh number divided by the Nusselt number times the tube diameter divided by its entry length.

6334      Kellogg equation      Law      Thermal Engineering

An equation of state for a gas, of the form  $p = RT/v + N$

12312      Bulygin number      Law      Thermal Engineering

A dimensionless number used in the study of heat transfer during evaporation.

905	Andrews's curves	Law	Thermal Engineering
A series of isotherms for carbon dioxide, showing the dependence of pressure on volume at various temperatures.			
12296	Clausius number	Law	Thermal Engineering
A dimensionless number used in the study of heat conduction in forced fluid flow, equal to $V^3 L \rho / k \Delta T$ , where V is the fluid velocity, $\rho$ is its density, L is a characteristic dimension, k is the thermal conductivity, and $\Delta T$ is the temperature difference.			
12297	Stanton number	Law	Thermal Engineering
A dimensionless number used in the study of forced convection, equal to the heat-transfer coefficient of a fluid divided by the product of the specific heat at constant pressure, the fluid density, and the fluid velocity. Symbolized $St$ . Also known as Margoules number (M).			
12298	Nusselt number	Law	Thermal Engineering
A dimensionless number used in the study of forced convection which gives a measure of the ratio of the total heat transfer to conductive heat transfer, and is equal to the heat-transfer coefficient times a characteristic length divided by the thermal conductivity. Symbolized $Nu$ .			
1230	Dufour number	Law	Thermal Engineering
A dimensionless number used in studying thermodiffusion, equal to the increase in enthalpy of a unit mass during isothermal mass transfer divided by the enthalpy of a unit mass of mixture. Symbol $Du$ .			
11905	Kirchhoff formula	Law	Thermal Engineering
A formula for the dependence of vapor pressure p on temperature T, valid over limited temperature ranges; it may be written $\log p = A - (B/T) - C \log T$ , where A, B, and C are constants.			
1231	J factor	Law	Thermal Engineering
A dimensionless equation used for the calculation of free convection heat transmission through fluid films.			
11900	Mayer's formula	Law	Thermal Engineering
A formula which states that the difference between the specific heat of a gas at constant pressure and its specific heat at constant volume is equal to the gas constant divided by the molecular weight of the gas. mb See millibar.			
12685	Lee's disk	Law	Thermal Engineering
A device for determining the thermal conductivity of poor conductors in which a thin, cylindrical slice of the substance under study is sandwiched between two copper disks, a heating coil is placed between one of these disks and a third copper disk, and the temperatures of the three copper disks are measured.			

13887	Carnot's theorem	Law	Thermal Engineering
<p>1. The theorem that all Carnot engines operating between two given temperatures have the same efficiency, and no cyclic heat engine operating between two given temperatures is more efficient than a Carnot engine. 2. The theorem that any system has two properties, the thermodynamic temperature <math>T</math> and the entropy <math>S</math>, such that the amount of heat exchanged in an infinitesimal reversible process is given by <math>dQ = TdS</math>; the thermodynamic temperature is a strictly increasing function of the empirical temperature measured on an arbitrary scale.</p>			
14096	Gibbs-Helmholtz equation	Law	Thermal Engineering
<p>1. Either of two thermodynamic relations that are useful in calculating the internal energy <math>U</math> or enthalpy <math>H</math> of a system; they may be written <math>U = F - T(3F/3T)V</math> and <math>H = G - T(3G/3T)P</math> where <math>F</math> is the free energy, <math>G</math> is the Gibbs free energy, <math>T</math> is the absolute temperature, <math>V</math> is the volume, and <math>P</math> is the pressure. 2. Any of the similar equations for changes in thermodynamic potentials during an isothermal process.</p>			
14158	Kelvin temperature scale	Law	Thermal Engineering
<p>1. An International Temperature Scale which agrees with the Kelvin absolute temperature scale within the limits of experimental determination. 2. See Kelvin absolute temperature scale.</p>			
14180	Joule experiment	Law	Thermal Engineering
<p>1. An experiment to detect intermolecular forces in a gas, in which one measures the heat absorbed when gas in a small vessel is allowed to expand into a second vessel which has been evacuated. 2. An experiment to measure the mechanical equivalent of heat, in which falling weights cause paddles to rotate in a closed container of water whose temperature rise is measured by a thermometer.</p>			
1418	Callendar's equation	Law	Thermal Engineering
<p>1. An equation of state for steam whose temperature is well above the boiling point at the existing pressure, but is less than the critical temperature: <math>(V - b) = (RT/p) - (a/T)</math>, where <math>V</math> is the volume, <math>R</math> is the gas constant, <math>T</math> is the temperature, <math>p</math> is the pressure, <math>n</math> equals <math>10/3</math>, and <math>a</math> and <math>b</math> are constants.</p>			
12304	Gukhman number	Law	Thermal Engineering
<p>A dimensionless number used in studying convective heat transfer in evaporation, equal to <math>(t_0 - t_m)/T_0</math>, where <math>t_0</math> is the temperature of a hot gas stream, <math>t_m</math> is the temperature of a moist surface over which it is flowing, and <math>T_0</math> is the absolute temperature of the gas stream. Symbolized <math>Gu</math>; <math>NGu</math>.</p>			
10814	Wobbe index	Law	Thermal Engineering
<p>A measure of the amount of heat released by a gas burner with a constant orifice, equal to the gross calorific value of the gas in British thermal units per cubic foot at standard temperature and pressure divided by the square root of the specific</p>			

gravity of the gas.

10426      Morgan equation      Law      Thermal Engineering

A modification of the Ramsey-Shields equation, in which the expression for the molar surface energy is set equal to a quadratic function of the temperature rather than to a linear one.

1057      Ramsay-Young method      Law      Thermal Engineering

A method of measuring the vapor pressure of a liquid, in which a thermometer bulb is surrounded by cotton wool soaked in the liquid, and the pressure, measured by a manometer, is reduced until the thermometer reading is steady.

10572      Griffiths' method      Law      Thermal Engineering

A method of measuring the mechanical equivalent of heat in which the temperature rise of a known mass of water is compared with the electrical energy needed to produce this rise.

10573      Berthelot method      Law      Thermal Engineering

A method of measuring the latent heat of vaporization of a liquid that involves determining the temperature rise of a water bath that encloses a tube in which a given amount of vapor is condensed.

10604      Egerton's effusion method      Law      Thermal Engineering

A method of determining vapor pressures of solids at high temperatures, in which one measures the mass lost by effusion from a sample placed in a tightly sealed silica pot with a small hole; the pot rests at the bottom of a tube that is evacuated for several hours, and is maintained at a high temperature by a heated block of metal surrounding it.

12293      Fourier number      Law      Thermal Engineering

A dimensionless number used in the study of unsteady-state heat transfer, equal to the product of the thermal conductivity and a characteristic time, divided by the product of the density, the specific heat at constant pressure, and the distance from the midpoint of the body through which heat is passing to the surface. Symbolized  $N_{Fo}$ .

10606      Schleiermacher's method      Law      Thermal Engineering

A method of determining the thermal conductivity of a gas, in which the gas is placed in a cylinder with an electrically heated wire along its axis, and the electric energy supplied to the wire and the temperatures of wire and cylinder are measured.

6325      Huttig equation      Law      Thermal Engineering

An equation which states that the ratio of the volume of gas adsorbed on the surface of a nonporous solid at a given pressure and temperature to the volume of gas required to cover the surface completely with a unimolecular layer equals  $(1 + r) \cdot c_r / (1 + c_r)$ , where  $r$  is the ratio of the equilibrium gas pressure to the saturated vapor pressure of the adsorbate at

the temperature of adsorption, and  $c$  is the product of a constant and the exponential of  $(q - q_l)/RT$ , where  $q$  is the heat of adsorption into a first layer molecule,  $q_l$  is the heat of liquefaction of the adsorbate,  $T$  is the temperature, and  $R$  is the gas constant.

11260    **Watt's law**    Law    Thermal Engineering

A law which states that the sum of the latent heat of steam at any temperature of generation and the heat required to raise water from 0°C to that temperature is constant; it has been shown to be substantially in error.

11377    **Carnot cycle**    Law    Thermal Engineering

A hypothetical cycle consisting of four reversible processes in succession: an isothermal expansion and heat addition, an isentropic expansion, an isothermal compression and heat rejection process, and an isentropic compression.

11699    **Ten Broecke chart**    Law    Thermal Engineering

A graphical plot of heat transfer and temperature differences used to calculate the thermal efficiency of a countercurrent cool-fluid-warm-fluid heatexchange system.

11720    **emagram**    Law    Thermal Engineering

A graph of the logarithm of the pressure of a substance versus its temperature, when it is held at constant volume; in meteorological investigations, the potential temperature is often the parameter emanometer

11765    **second law of thermodynamics**    Law    Thermal Engineering

A general statement of the idea that there is a preferred direction for any process; there are many equivalent statements of the law, the best known being those of Clausius and of Kelvin.

11898    **Clausius' statement**    Law    Thermal Engineering

A formulation of the second law of thermodynamics, stating it is not possible that, at the end of a cycle of changes, heat has been transferred from a colder to a hotter body without producing some other effect.

10605    **Matthiessen sinker method**    Law    Thermal Engineering

A method of determining the thermal expansion coefficient of a liquid, in which the apparent weight of a sinker when immersed in the liquid is measured for two different temperatures of the liquid.

1817    **Fourier law of heat conduction**    Law    Thermal Engineering

The law that the rate of heat flow through a substance is proportional to the area normal to the direction of flow and to the negative of the rate of change of temperature with distance along the direction of flow. Also known as Fourier heat

6328    **Beattie and Bridgman equation**    Law    Thermal Engineering

An equation that relates the pressure, volume, and temperature of a real gas to the gas constant. beat tone

1387      Clausius inequality      Law      Thermal Engineering

The principle that for any system executing a cyclical process, the integral over the cycle of the infinitesimal amount of heat transferred to the system divided by its temperature is equal to or less than zero.

1389      Curie principle      Law      Thermal Engineering

The principle that a macroscopic cause never has more elements of symmetry than the effect it produces; for example, a scalar cause cannot produce a vectorial effect.

1559      Joule equivalent      Law      Thermal Engineering

The numerical relation between quantities of mechanical energy and heat; the present accepted value is 1 fifteendegrees calorie equals  $4.1855 \pm 0.0005$  joules. Also known as mechanical equivalent of heat.

1589      Massieu function      Law      Thermal Engineering

The negative of the Helmholtz free energy divided by the temperature.

1159      spectral emissivity      Law      Thermal Engineering

The ratio of the radiation emitted by a surface at a specified wavelength to the radiation emitted by a perfect blackbody radiator at the same wavelength and temperature.

1732      Leidenfrost point      Law      Thermal Engineering

The lowest temperature at which a hot body submerged in a pool of boiling water is completely blanketed by a vapor film; there is a minimum in the heat flux from the body to the water at this temperature.

1158      emissivity      Law      Thermal Engineering

The ratio of the radiation emitted by a surface to the radiation emitted by a perfect blackbody radiator at the same temperature.

1818      Dulong-Petit law      Law      Thermal Engineering

The law that the product of the specific heat per gram and the atomic weight of many solid elements at room temperature has almost the same value, about 6.3 calories (264 joules) per degree Celsius.

1830      Clausius law      Law      Thermal Engineering

The law that an ideal gas's specific heat at constant volume does not depend on the temperature.

1856      Giaque's temperature scale      Law      Thermal Engineering

The internationally accepted scale of absolute temperature, in which the triple point of water is defined to have a

temperature of 273.16 K.

1935	Hildebrand function	Law	Thermal Engineering
------	---------------------	-----	---------------------

The heat of vaporization of a compound as a function of the molal concentration of the vapor; it is nearly the same for many compounds.

2098	ideal gas law	Law	Thermal Engineering
------	---------------	-----	---------------------

The equation of state of an ideal gas which is a good approximation to real gases at sufficiently high temperatures and low pressures; that is,  $PV = RT$ , where  $P$  is the pressure,  $V$  is the volume per mole of gas,  $T$  is the temperature, and  $R$  is the gas constant.

2143	Carnot efficiency	Law	Thermal Engineering
------	-------------------	-----	---------------------

The efficiency of a Carnot engine receiving heat at a temperature absolute  $T_1$  and giving it up at a lower temperature absolute  $T_2$ ; equal to  $(T_1 - T_2)/T_1$ .

1590	Planck function	Law	Thermal Engineering
------	-----------------	-----	---------------------

The negative of the Gibbs free energy divided by the absolute temperature. plane

919	Kelvin's statement of the second law	Law	Thermal Engineering
-----	--------------------------------------	-----	---------------------

The statement that it is not possible that, at the end of a cycle of changes, heat has been extracted from a reservoir and an equal amount of work has been produced without producing some other effect.

769	Gibbs free energy	Law	Thermal Engineering
-----	-------------------	-----	---------------------

The thermodynamic function  $G = H - TS$ , where  $H$  is enthalpy,  $T$  absolute temperature, and  $S$  entropy. Also known as free energy; free enthalpy; Gibbs function.

779	Nernst heat theorem	Law	Thermal Engineering
-----	---------------------	-----	---------------------

The theorem expressing that the rate of change of free energy of a homogeneous system with temperature, and also the rate of change of enthalpy with temperature, approaches zero as the temperature approaches absolute zero.

793	brittle temperature	Law	Thermal Engineering
-----	---------------------	-----	---------------------

The temperature point below which a material, especially metal, is brittle; that is, the critical normal stress for fracture is reached before the critical shear stress for plastic deformation.

795	gold point	Law	Thermal Engineering
-----	------------	-----	---------------------

The temperature of the freezing point of gold at a pressure of 1 standard atmosphere (101,325 pascals); used to define the International Temperature Scale of 1940, on which it is assigned a value of 1337.33 K or 1064.18°C.



797	annealing point	Law	Thermal Engineering
The temperature at which the viscosity of a glass is 10130 poises.			
1274	five-fourths power law	Law	Thermal Engineering
The proposition that the rate of heat loss from a body by free convection is proportional to the fivefourths power of the difference between the temperature of the body and that of its surroundings.			
918	Nernst-Simon statement of the third	Law	Thermal Engineering
The statement that the change in entropy which occurs when a homogeneous system undergoes an isothermal reversible process approaches zero as the temperature approaches absolute zero.			
2650	mechanical equivalent of heat	Law	Thermal Engineering
The amount of mechanical energy equivalent to a unit of heat.			
993	psychrometric formula	Law	Thermal Engineering
The semi empirical relation giving the vapor pressure in terms of the barometer and psychrometer readings.			
1013	thermometry	Law	Thermal Engineering
The science and technology of measuring temperature, and the establishment of standards of temperature measurement.			
1014	pyrometry	Law	Thermal Engineering
The science and technology of measuring high temperatures.			
1019	Eotvos rule	Law	Thermal Engineering
The rule that the rate of change of molar surface energy with temperature is a constant for all liquids; deviations are encountered in practice.			
1020	Neumann-Kopp rule	Law	Thermal Engineering
The rule that the heat capacity of 1 mole of a solid substance is approximately equal to the sum over the elements forming the substance of the heat capacity of a gram atom of the element times the number of atoms of the element in a molecule of the substance.			
1152	Joule-Thomson coefficient	Law	Thermal Engineering
The ratio of the temperature change to the pressure change of a gas undergoing isenthalpic expansion. Joule-Thomson effect			
800	oxygen point	Law	Thermal Engineering
The temperature at which liquid oxygen and its vapor are in equilibrium, that is, the boiling point of oxygen, at standard			

atmospheric pressure; it is taken as a fixed point on the International Practical Temperature Scale of 1968, at -182.962°C.

6255 Boltzmann engine Law Thermal Engineering

An ideal thermodynamic engine that utilizes blackbody radiation; used to derive the Stefan-Boltzmann law.

4526 Rankine-Hugoniot equations Law Thermal Engineering

Equations, derived from the laws of conservation of mass, momentum, and energy, which relate the velocity of a shock wave and the pressure, density, and enthalpy of the transmitting fluid before and after the shock wave passes.

4528 Ehrenfest's equations Law Thermal Engineering

Equations which state that for the phase curve  $P(T)$  of a second-order phase transition the derivative of pressure  $P$  with respect to temperature  $T$  is equal to  $(C_{fp} - C_{ip})/TV(\alpha - \alpha_i) = (\alpha - \alpha_i)/(K_f - K_i)$ , where  $i$  and  $f$  refer to the two phases,  $\alpha$  is the coefficient of volume expansion,  $K$  is the compressibility,  $C_p$  is the specific heat at constant pressure, and  $V$  is the

4543 Dufour effect Law Thermal Engineering

Energy flux due to a mass gradient occurring as a coupled effect of irreversible processes.

4640 Colburn  $j$  factor equation Law Thermal Engineering

Dimensionless heat-transfer equation to calculate the natural convection movement of heat from vertical surfaces or horizontal cylinders to fluids (gases or liquids) flowing past these surfaces.

4642 Nusselt equation Law Thermal Engineering

Dimensionless Nusselt number equation used to calculate convection heat transfer for heating or cooling of fluids outside a bank of 10 or more rows of tubes to which the fluid flow is normal.

2512 Kelvin scale Law Thermal Engineering

The basic scale used for temperature definition; the triple point of water (comprising ice, liquid, and vapor) is defined as 273.16 K; given two reservoirs, a reversible heat engine is built operating in a cycle between them, and the ratio of their temperatures is defined to be equal to the ratio of the heats transferred.

6252 Lambert surface Law Thermal Engineering

An ideal, perfectly diffusing surface for which the intensity of reflected radiation is independent of direction. *Lame*

4319 Mollier diagram Law Thermal Engineering

Graph of enthalpy versus entropy of a vapor on which isobars, isothermals, and lines of equal dryness are plotted.

6256 Ericsson cycle Law Thermal Engineering

An ideal thermodynamic cycle consisting of two isobaric processes interspersed with processes which are, in effect,

isothermal, but each of which consists of an infinite number of alternating isentropic and isobaric processes.

6259      Sargent cycle      Law      Thermal Engineering

An ideal thermodynamic cycle consisting of four reversible processes: adiabatic compression, heating at constant volume, adiabatic expansion, and isobaric cooling.

6286      Caratheodory's principle      Law      Thermal Engineering

An expression of the second law of thermodynamics which says that in the neighborhood of any equilibrium state of a system, there are states which are not accessible by a reversible or irreversible adiabatic process. Also known as principle of inaccessibility.

6295      Joule and Playfairs' experiment      Law      Thermal Engineering

An experiment in which the temperature of the maximum density of water is measured by taking the mean of the temperatures of water in two columns whose densities are determined to be equal from the absence of correction currents in a connecting trough.

6324      Jeans viscosity equation      Law      Thermal Engineering

An equation which states that the viscosity of a gas is proportional to the temperature raised to a constant power, which is different for different gases.

696      phase      Law      Thermal Engineering

The type of state of a system, such as solid, liquid, or gas.

5105      Joule-Thomson inversion temperature      Law      Thermal Engineering

A temperature at which the Joule-Thomson coefficient of a given gas changes sign.

2822      international practical temperature      Law      Thermal Engineering

Temperature scale based on six 299 international system of electrical units points: the water triple point, the boiling points of oxygen, water, sulfur, and the solidification points of silver and gold; designated as °C, degrees Celsius, or tint; replaced in 1990 by the international temperature scale.

6326      Humphries equation      Law      Thermal Engineering

An equation which gives the ratio of specific heats at constant pressure and constant volume in moist air as a function of water vapor pressure.

2653      heat-transfer coefficient      Law      Thermal Engineering

The amount of heat which passes through a unit area of a medium or system in a unit time when the temperature difference between the boundaries of the system is 1 degree.

2654	thermal conductance	Law	Thermal Engineering
The amount of heat transmitted by a material divided by the difference in temperature of the surfaces of the material. Also known as conductance.			
2656	latent heat	Law	Thermal Engineering
The amount of heat absorbed or evolved by 1 mole, or a unit mass, of a substance during a change of state (such as 320 lay-up fusion, sublimation or vaporization) at constant temperature and pressure.			
2683	Joule-Thomson expansion	Law	Thermal Engineering
The adiabatic, irreversible expansion of a fluid flowing through a porous plug or partially opened valve. Also known as Joule-Thomson process.			
2693	reduced value	Law	Thermal Engineering
The actual value of a quantity divided by the value of that quantity at the critical point. Also known as reduced property.			
4432	Boyle's temperature	Law	Thermal Engineering
For a given gas, the temperature at which the virial coefficient B in the equation of state $Pv = RT$			
282	Celsius temperature scale	Law	Thermal Engineering
Temperature scale in which the temperature $G_c$ in degrees Celsius ( $^{\circ}\text{C}$ ) is related to the temperature $T_k$ in kelvins by the formula $G_c = T_k - 273.15$ ; the freezing point of water at standard atmospheric pressure is very nearly $0^{\circ}\text{C}$ and the corresponding boiling point is very nearly $100^{\circ}\text{C}$ . Formerly known as centigrade temperature scale.			
4413	Carnot-Clausius equation	Law	Thermal Engineering
For any system executing a closed cycle of reversible changes, the integral over the cycle of the infinitesimal amount of heat transferred to the system divided by its temperature equals 0. Also 88 cascade known as Clausius theorem.			
2830	psychrometric tables	Law	Thermal Engineering
Tables prepared from the psychrometric formula and used to obtain vapor pressure, relative humidity, and dew point from values of wet-bulb and dry-bulb temperature.			
3214	psychromatic ratio	Law	Thermal Engineering
Ratio of the heat-transfer coefficient to the product of the mass-transfer coefficient and humid heat for a gas-vapor system; used in calculation of humidity or saturation relationships.			
3504	mean calorie	Law	Thermal Engineering
One-hundredth of the heat needed to raise 1 gram of water from 0 to $100^{\circ}\text{C}$ .			

3567	Maxwell relation	Law	Thermal Engineering
------	------------------	-----	---------------------

One of four equations for a system in thermal equilibrium, each of which equates two partial derivatives, involving the pressure, volume, temperature, and entropy of the system.

4220	demon of Maxwell	Law	Thermal Engineering
------	------------------	-----	---------------------

Hypothetical creature who controls a trapdoor over a microscopic hole in an adiabatic wall between two vessels filled with gas at the same temperature, so as to supposedly decrease the entropy of the gas as a whole and thus violate the second law of thermodynamics. Also known as Maxwell's demon.

252	mean specific heat	Law	Thermal Engineering
-----	--------------------	-----	---------------------

The average over a specified range of temperature of the specific heat of a substance.

2820	Reaumur temperature scale	Law	Thermal Engineering
------	---------------------------	-----	---------------------

Temperature scale where water freezes at 0°R and boils at 80°R.

## The Triz 40 Inventive Principles

1. Segmentation.
  - a. Divide an object into independent parts.
  - b. Make an object sectional.
  - c. Increase the degree of an object's segmentation.
2. Extraction.
  - a. Extract (remove or separate) a "disturbing" part or property from an object, or
  - b. Extract only the necessary part or property
3. Local Quality.
  - a. Transition from a homogeneous structure of an object or outside environment/action to a heterogeneous structure
  - b. Have different parts of the object carry out different functions
  - c. Place each part of the object under conditions most favourable for its operation
4. Asymmetry.
  - a. Replace a symmetrical form with an asymmetrical form.
  - b. If an object is already asymmetrical, increase the degree of asymmetry
5. Combining
  - a. Combine in space homogeneous objects or objects destined for contiguous operations
  - b. Combine in time homogeneous or contiguous operations
6. Universality.

Have the object perform multiple functions, thereby eliminating the need for some other object(s)
7. Nesting
  - a. Contain the object inside another which, in turn, is placed inside a third object
  - b. Pass an object through a cavity of another object
8. Counterweight.
  - a. Compensate for the object's weight by joining with another object that has a lifting force
  - b. Compensate for the weight of an object by interaction with an environment providing aerodynamic or hydrodynamic forces
9. Prior counter-action
  - a. Perform a counter-action in advance
  - b. If the object is (or will be) under tension, provide anti-tension in advance
10. Prior action.
  - a. Carry out all or part of the required action in advance
  - b. Arrange objects so they can go into action in a timely matter and from a convenient position
11. Cushion in advance.

Compensate for the relatively low reliability of an object by countermeasures taken in advance
12. Equipotentiality

Change the working conditions so that an object need not be raised or lowered.
13. Inversion.
  - a. Instead of an action dictated by the specifications of the problem, implement an opposite action
  - b. Make a moving part of the object or the outside environment immovable and the non-moving part movable

c. Turn the object upside-down

14. Spheroidality

a. Replace linear parts or flat surfaces with curved ones; replace cubical shapes with spherical shapes

b. Use rollers, balls spirals

c. Replace a linear motion with rotating movement; utilize a centrifugal force

15. Dynamicity.

a. Make an object or its environment automatically adjust for optimal performance at each stage of operation

b. Divide an object into elements which can change position relative to each other

c. If an object is immovable, make it movable or interchangeable

16. Partial or excessive action.

If it is difficult to obtain 100% of a desired effect, achieve somewhat more or less to greatly simplify the problem

17. Moving to a new dimension.

a. Remove problems with moving an object in a line by two-dimensional movement (i.e. along a plane)

b. Use a multi-layered assembly of objects instead of a single layer

c. Incline the object or turn it on its side

18. Mechanical vibration

a. Set an object into oscillation

b. If oscillation exists, increase its frequency, even as far as ultrasonic

c. Use the resonant frequency

d. Instead of mechanical vibrations, use piezovibrators

e. Use ultrasonic vibrations in conjunction with an electromagnetic field

19. Periodic action.

a. Replace a continuous action with a periodic (pulsed) one

b. If an action is already periodic, change its frequency

c. Use pulsed between impulses to provide additional action

20. Continuity of a useful action.

a. Carry out an action continuously (i.e. without pauses), where all parts of an object operate at full capacity

b. Remove idle and intermediate motions

21. Rushing through

Perform harmful or hazardous operations at very high speed

22. Convert harm into benefit

a. Utilize harmful factors or environmental effects to obtain a positive effect

b. Remove a harmful factor by combining it with another harmful factor

c. Increase the amount of harmful action until it ceases to be harmful

23. Feedback

a. Introduce feedback

b. If feedback already exists, reverse it

24. Mediator

a. Use an intermediary object to transfer or carry out an action

b. Temporarily connect an object to another one that is easy to remove

25. Self-service

a. Make the object service itself and carry out supplementary and repair operations

b. Make use of wasted material and energy

26. Copying

a. Use a simple and inexpensive copy instead of an object which is complex, expensive, fragile or inconvenient to operate.

b. Replace an object by its optical copy or image. A scale can be used to reduce or enlarge the image.

c. If visible optical copies are used, replace them with infrared or ultraviolet copies

27. Inexpensive, short-lived object for expensive, durable one

Replace an expensive object by a collection of inexpensive ones, forgoing properties (e.g. longevity)

Examples:

Disposable diapers

28. Replacement of a mechanical system

a. Replace a mechanical system by an optical, acoustical or olfactory (odour) system

b. Use an electrical, magnetic or electromagnetic field for interaction with the object

c. Replace fields

1. Stationary fields with moving fields

2. Fixed fields with those which change in time

3. Random fields with structured fields

d. Use a field in conjunction with ferromagnetic particles

29. Pneumatic or hydraulic construction

Replace solid parts of an object by gas or liquid. These parts can use air or water for inflation, or use air or hydrostatic cushions

For shipping fragile products, air bubble envelopes or foam-like materials are used.

30. Flexible membranes or thin film

a. Replace traditional constructions with those made from flexible membranes or thin film

b. Isolate an object from its environment using flexible membranes or thin film

31. Use of porous material

a. Make an object porous or add porous elements (inserts, covers, etc.)

b. If an object is already porous, fill the pores in advance with some substance

32. Changing the colour

a. Change the colour of an object or its surroundings

b. Change the degree of translucency of an object or processes which are difficult to see

c. Use coloured additives to observe objects or processes which are difficult to see

d. If such additives are already used, employ luminescent traces or tracer elements

33. Homogeneity

Make those objects which interact with a primary object out of the same material or material that is close to it in behavior.

34. Rejecting and regenerating parts

a. After it has completed its function or become useless, reject or modify (e.g. discard, dissolve, evaporate) an element of an object

b. Immediately restore any part of an object which is exhausted or depleted

35. Transformation of the physical and chemical states of an object

Change an object's aggregate state, density distribution, degree of flexibility, temperature

36. Phase transformation

Implement an effect developed during the phase transition of a substance. For instance, during the change of volume, liberation or absorption of heat.

37. Thermal expansion

a. Use a material which expands or contracts with heat

b. Use various materials with different coefficients of heat expansion

38. Use strong oxidisers

a. Replace normal air with enriched air



- b. Replace enriched air with oxygen
  - c. Treat an object in air or in oxygen with ionising radiation
  - d. Use ionised oxygen
39. Inert environment
- a. Replace the normal environment with an inert one
  - b. Carry out the process in a vacuum
40. Composite materials
- Replace a homogeneous material with a composite one

## Innovators

4th century of the Christian Era

Pappus of Alexandria introduced term Heuristics

1470s

Leonardo da Vinci

1920s

Fritz Zwicky - Morphological Analysis

Pablo Picasso painter

Marcel Duchamp artist

1940s

Lawrence Delos Miles

George Polya

1950s

Alex Osborn

Sid Parnes

1950s

Genrich Altshuller - TRIZ, ARIZ Genrikh Altshuller

1960s

Carl Jung classified creativity as one of the five main instinctive forces in humans

(Jung 1964)

Edward Matchett - Fundamental design method (1968)

Rogers described it in his essay Towards a Theory of Creativity (1961):

William Gordon - Synectics

Edward de Bono - Lateral thinking

1970s

Albert Rothenberg coined the term 'Janusian thinking'

Yoji Akoa - Quality function deployment

Total creativity is the ultimate goal in the philosophy of John David Garcia

1980s

Peter Drucker

1990s

Clayton Christensen

2000s

Jim Collins

## History of Innovation

### Palaeolithic Era

2.4 MYA: Stone tools in Africa

2 MYA: Language (controversial - this is the earliest likely)

1 MYA: Controlled fire in Africa

400 KYA: Pigments in Zambia

60 KYA: Ships probably used by settlers of New Guinea

50 KYA: Bow and arrow in Tunisia

43 KYA: Mining

30 KYA: Sewing

26 KYA: Ceramics in Moravia

12 KYA: Pottery by Jomon in Japan

## **9th millennium BC**

8700 BC: Metalworking (copper pendant in Iraq)

8500 BC: Agriculture in the Fertile Crescent

## **8th millennium BC**

Animal husbandry in the Middle East

## **7th millennium BC**

6200 BC: Map in Çatalhöyük

Cloth woven from flax fiber

Wine in Jiahu, China

## **6th millennium BC**

Irrigation in the Fertile Crescent

Ploughs in Mesopotamia

## **4th millennium BC**

3800s BC: Engineered roadway in England

3500 BC: Plywood in Egypt

3500 BC: Writing in Sumer

3500 BC: Carts in Sumer

Bronze by the Maikops

Silk in China

Cement in Egypt

River boats in Egypt

## **3rd millennium BC**

2800 BC: Soap in Babylonia

sledges - Scandinavia

the use of yeast for:

leavened bread

Fermentation to produce beer in Sumeria

## **2nd millennium BC**

Alphabet in Egypt

Glass in Egypt

Rubber in Mesoamerica

Spoked wheel chariot in the Middle East

Water clock in Egypt

Bells in China

## **1st millennium BC**

Arch in Greece

Odometer : Rome: Archimedes?

600s BC: Coinage in Lydia

400s BC: Catapult in Syracuse

300s BC: Compass in China.

300s BC: Screw: Archytas

200s BC: Crossbow in China

200s BC: Compound pulley: Archimedes

150s BC: Astrolabe: Hipparchus

100s BC: Parchment in Pergamon

1st century BC: Glassblowing in Syria

87 BC: Clockwork (the Antikythera mechanism): Posidonius?

## **1st millennium**

1st century: Aeolipile: Hero of Alexandria

1st century: Stern mounted rudder in China

105: Paper: Cai Lun  
132: Rudimentary Seismometer: Zhang Heng  
200s: Wheelbarrow: Zhuge Liang  
200s: Horseshoes in Germany  
300s: Stirrup in China  
600: Mouldboard plough in Eastern Europe  
600s: Windmill in Persia  
673: Greek fire: Kallinikos  
800s: Gunpowder in China  
852: Parachute: Armen Firman  
900: Horse collar in Europe  
Woodblock printing in China  
Porcelain in China  
Spinning wheel in China or India

## **2nd millennium**

### **11th century**

1040s: Moveable type printing: Bi Sheng

### **12th century**

1128: Cannon in China

### **13th century**

1280s: Eyeglasses in Northern Italy

### **14th century**

1335: Mechanical clock in Milan

### **15th century**

Arquebus and Rifle in Europe

1450s: Alphabetic, movable type printing press: Johann Gutenberg

1451: Concave lens for eyeglasses: Nicholas of Cusa

### **16th century**

1510: Pocket watch: Peter Henlein

1581: Pendulum: Galileo Galilei

1589: Stocking frame: William Lee

1593: Thermometer: Galileo Galilei

Musket in Europe

### **17th century**

1608: Telescope: Hans Lippershey

1609: Microscope: Galileo Galilei

1620: Slide rule: William Oughtred

1623: Automatic calculator: Wilhelm Schickard

1642: Adding machine: Blaise Pascal

1643: Barometer: Evangelista Torricelli

1645: Vacuum pump: Otto von Guericke

1657: Pendulum clock: Christiaan Huygens

1698: Steam engine: Thomas Savery

### **18th century**

1701: Seed drill: Jethro Tull

1705: Steam piston engine: Thomas Newcomen

1709: Piano: Bartolomeo Cristofori

1710: Thermometer: René Antoine Ferchault de Réaumur

1711: Tuning fork: John Shore

1714: Mercury thermometer: Daniel Gabriel Fahrenheit

1730: Mariner's quadrant: Thomas Godfrey

1731: Sextant: John Hadley  
1733: Flying shuttle: John Kay (Flying Shuttle)  
1742: Franklin stove: Benjamin Franklin  
1750: Flatboat: Jacob Yoder  
1752: Lightning rod: Benjamin Franklin  
1762: Iron smelting process: Jared Eliot  
1767: Spinning jenny: James Hargreaves  
1767: Carbonated water: Joseph Priestley  
1769: Steam engine: James Watt  
1769: Water Frame: Richard Arkwright  
1775: Submarine Turtle: David Bushnell  
1777: Card teeth making machine: Oliver Evans  
1777: Circular saw: Samuel Miller  
1779: Spinning mule: Samuel Crompton  
1785: Power loom: Edmund Cartwright  
1785: Automatic flour mill: Oliver Evans  
1783: Multitubular boiler engine: John Stevens  
1783: Hot air balloon: Montgolfier brothers  
1784: Bifocals: Benjamin Franklin  
1784: Shrapnel shell: Henry Shrapnel  
1785: Parachute: Jean Pierre Blanchard  
1787: Non-condensing high pressure Engine: Oliver Evans  
1790: Cut and head nail machine: Jacob Perkins  
1791: Steamboat: John Fitch  
1791: Artificial Teeth: Nicholas Dubois De Chemant

1793: Cotton gin: Eli Whitney  
1793: Optical telegraph: Claude Chappe  
1797: Cast iron plow: Charles Newbold  
1798: Vaccination: Edward Jenner  
1798: Lithography: Alois Senefelder  
1799: Seeding machine: Eliakim Spooner

## **19th century**

### **1800s**

1800: Electric battery: Alessandro Volta  
1801: Jacquard loom: Joseph Marie Jacquard  
1802: Screw propeller steamboat *Phoenix*: John Stevens  
1802: gas stove: Zachäus Andreas Winzler  
1805: Submarine Nautilus: Robert Fulton  
1805: Refrigerator: Oliver Evans  
1807: Steamboat Clermont: Robert Fulton  
1808: Band saw: William Newberry

### **1810s**

1811: Gun- Breechloader: Thornton (?)  
1812: Metronome: Dietrich Nikolaus Winkel  
1814: Steam Locomotive (*Blucher*): George Stephenson  
1816: Miner's safety lamp: Humphry Davy  
1816: Hand printing press: George Clymer  
1816: Metronome: Johann Nepomuk Maelzel (reputed)  
1816: Stirling engine: Robert Stirling  
1817: Kaleidoscope: David Brewster  
1819: Breech loading flintlock: John Hall



1819: Stethoscope: Rene Theophile Hyacinthe Laennec

#### **1820s**

1821: Electric motor: Michael Faraday

1823: Electromagnet: William Sturgeon

1826: Photography: Joseph Nicéphore Niépce

1826: internal combustion engine: Samuel Morey

1827: Insulated wire: Joseph Henry

1827: Screw propeller: Josef Ressel

1827: Friction match: John Walker

#### **1830s**

1830: Lawn mower: Edwin Beard Budding

1831: Multiple coil magnet: Joseph Henry

1831: Magnetic acoustic telegraph: Joseph Henry

1831: Reaper: Cyrus McCormick

1831: Electrical generator: Michael Faraday

1835: Photogenic Drawing: William Henry Fox Talbot

1835: Revolver: Samuel Colt

1835: Morse code: Samuel Morse

1835: Electromechanical Relay: Joseph Henry

1836: Improved screw propeller: John Ericsson

1836: Sewing machine: Josef Madersberger

1837: Photography: Louis-Jacques-Mandé Daguerre

1837: Steel plow: John Deere

1837: Standard diving dress: Augustus Siebe

1838: Electric telegraph: Charles Wheatstone

1839: Vulcanization of rubber: Charles Goodyear

#### **1840s**

1840: Frigate with submarine machinery SS Princeton: John Ericsson

1840: artificial fertilizer: Justus von Liebig

1842: Anaesthesia: Crawford Long

1843: Typewriter: Charles Thurber

1843: Fax machine: Alexander Bain

1844: Telegraph: Samuel Morse

1845: Portland cement: William Aspdin

1845: Double tube tire: Robert Thomson (inventor)

1846: Sewing machine: Elias Howe

1846: Rotary printing press: Richard M. Hoe

1849: Safety pin: Walter Hunt

1849: Francis turbine: James B. Francis

#### **1850s**

1852: Airship: Henri Giffard

1852: Passenger elevator: Elisha Otis

1852: Gyroscope: Léon Foucault

1853: Glider: Sir George Cayley

1855: Bunsen burner: Robert Bunsen

1855: Bessemer process: Henry Bessemer

1856: First celluloids: Alexander Parkes

1858: Undersea telegraph cable: Fredrick Newton Gisborne

1858: Shoe sole sewing machine: Lyman R. Blake

1858: Mason jar: John L. Mason

1859: Oil drill: Edwin L. Drake

1860: Linoleum: Fredrick Walton

#### **1860s**

1860: Repeating rifle: Oliver F. Winchester, Christopher Spencer

1860: Self-propelled torpedo: Ivan Lupis-Vukić

1861: Ironclad USS Monitor: John Ericsson

1861: Furnace for steel: Wilhelm von Siemens

1862: Revolving machine gun: Richard J. Gatling

1862: Mechanical submarine: Narcís Monturiol i Estarriol

1863: Player piano: Henri Fourneaux

1864: first true typewriter: Peter Mitterhofer

1865: Compression ice machine: Thaddeus Lowe

1866: Dynamite: Alfred Nobel

1867: Practical Typewriter: Christopher L. Sholes

1868: Typewriter: Carlos Glidden, James Densmore and Samuel Soule

1868: Air brake (rail): George Westinghouse

1868: Oleomargarine: Mege Mouries

1869: Vacuum cleaner: I.W. McGaffers

#### **1870s**

1870: Magic Lantern projector: Henry R. Heyl

1870: Stock ticker: Thomas Alva Edison

1870: Mobile Gasoline Engine, Automobile: Siegfried Marcus

1871: Cable car (railway): Andrew S. Hallidie

1871: Compressed air rock drill: Simon Ingersoll

1872: Celluloid (later development): John W. Hyatt

1872: Adding machine: Edmund D. Barbour

1873: Barbed wire: Joseph F. Glidden

1873: Railway knuckle coupler: Eli H. Janney

1873: Modern direct current electric motor: Zénobe Gramme

1874: Electric street car: Stephen Dudle Field

1875: Dynamo: William A. Anthony

1875: Gun- (magazine): Benjamin B. Hotchkiss

1876: Telephone: Alexander Graham Bell

1876: Telephone: Elisha Gray

1876: Carpet sweeper: Melville Bissell

1876: Gasoline carburettor: Daimler

1877: Stapler: Henry R. Heyl

1877: Induction motor: Nikola Tesla

1877: Phonograph: Thomas Alva Edison

1877: Electric welding: Elihu Thomson

1877: Twine Knotter: John Appleby

1878: Cathode ray tube: William Crookes

1878: Transparent film: Eastman Goodwin

1878: Rebreather: Henry Fleuss

1878: Incandescent Light bulb: Joseph Swan

1879: Pelton turbine: Lester Pelton

1879: Automobile engine: Karl Benz

1879: Cash register: James Ritty

1879: Automobile (Patent): George B. Seldon ... note did NOT invent auto

## **1880s**

- 1880: Photophone: Alexander Graham Bell
- 1880: Roll film: George Eastman
- 1880: Safety razor: Kampfe Brothers
- 1880: Seismograph: John Milne
- 1881: Electric welding machine: Elihu Thomson
- 1882: Electric fan: Schuyler Skatts Wheeler
- 1882: Electric flat iron: Henry W. Seely
- 1883: Auto engine - compression ignition: Gottlieb Daimler
- 1883: two-phase (alternating current) induction motor: Nikola Tesla
- 1884: Linotype machine: Ottmar Mergenthaler
- 1884: Fountain pen: Lewis Waterman NB: Did not invent fountain pen, nor even "first practical fountain pen". Started manufacture in 1883, too.
- 1884: Punched card accounting: Herman Hollerith
- 1884: Trolley car, (electric): Frank Sprague, Karel Van de Poele
- 1885: Automobile, differential gear: Karl Benz
- 1885: Maxim gun: Hiram Stevens Maxim
- 1885: Motor cycle: Gottlieb Daimler and Wilhelm Maybach
- 1885: Alternating current transformer: William Stanley
- 1886: Dishwasher: Josephine Cochrane
- 1886: Gasoline engine: Gottlieb Daimler
- 1886: Improved phonograph cylinder: Tainter & Bell
- 1887: Monotype machine: Tolbert Lanston
- 1887: Gramophone record: Emile Berliner
- 1887: Automobile, (gasoline): Gottlieb Daimler
- 1888: Polyphase AC Electric power system: Nikola Tesla (30 related patents.)

1888: Kodak hand camera: George Eastman  
1888: Ballpoint pen: John Loud  
1888: Pneumatic tube tire: John Boyd Dunlop  
1888: Harvester-thresher: Matteson (?)  
1888: Kinematograph: Augustin Le Prince  
1889: Automobile, (steam): Sylvester Roper

#### **1890s**

1890: Pneumatic Hammer: Charles B. King  
1891: Automobile Storage Battery: William Morrison  
1891: Zipper: Whitcomb Judson  
1891: Carborundum: Edward G. Acheson  
1892: Color photography: Frederic E. Ives  
1892: Automatic telephone exchange (electromechanical): Almon Strowger - First in commercial service.  
1893: Photographic gun: E.J. Marcy  
1893: Half tone engraving: Frederick Ives  
1893: Wireless communication: Nikola Tesla  
1895: Phatoptiken projector: Woodville Latham  
1895: Phantascope: C. Francis Jenkins  
1895: Disposable blades: King C. Gillette  
1895: Diesel engine: Rudolf Diesel  
1895: Radio signals: Guglielmo Marconi  
1896: Vitascope: Thomas Armat  
1896: Steam turbine: Charles Curtis  
1896: Electric stove: William S. Hadaway  
1897: Automobile, magneto: Robert Bosch

1898: Remote control: Nikola Tesla  
1899: Automobile self starter: Clyde J. Coleman  
1899: Magnetic tape recorder: Valdemar Poulsen  
1899: Gas turbine: Charles Curtis

## **20th century**

### **1900s**

1900: Rigid dirigible airship: Ferdinand Graf von Zeppelin  
1901: Improved wireless transmitter: Reginald Fessenden  
1901: Mercury vapor lamp: Peter C. Hewitt  
1901: paperclip: Johan Vaaler  
1902: Radio magnetic detector: Guglielmo Marconi  
1902: Radio telephone: Poulsen Reginald Fessenden  
1902: Rayon cellulose ester: Arthur D. Little  
1903: Electrocardiograph (EKG): Willem Einthoven  
1903: Powered Airplane: Wilbur Wright and Orville Wright  
1903: Bottle machine: Michael Owens  
1904: Thermionic valve: John Ambrose Fleming  
1904: Separable Attachment Plug: Harvey Hubbell  
1905: Radio tube diode: John Ambrose Fleming  
1906: Triode amplifier: Lee DeForest  
1907: Radio amplifier: Lee DeForest  
1907: Radio tube triode: Lee DeForest  
1907: Vacuum cleaner, (electric): James Spangler  
1907: Washing machine, (electric): Alva Fisher (Hurley Corporation)  
1909: Monoplane: Henry W. Walden

1909: Bakelite: Leo Baekeland

1909: Gun silencer: Hiram Percy Maxim

#### **1910s**

1910: Thermojet engine: Henri Coandă

1911: Gyrocompass: Elmer A. Sperry

1911: Automobile self starter (perfected): Charles F. Kettering

1911: Air conditioner: Willis Haviland Carrier

1911: Cellophane: Jacques Brandenburger

1911: Hydroplane: Glenn Curtiss

1912: Regenerative radio circuit: Edwin H. Armstrong

1912: revolutionary water turbine (Kaplan turbine), Viktor Kaplan

1913: Crossword puzzle: Arthur Wynne

1913: Improved X-Ray: William D. Coolidge

1913: Double acting wrench: Robert Owen

1913: Cracking process for Gasoline: William M. Burten

1913: Gyroscope stabilizer: Elmer A. Sperry

1913: Geiger counter: Hans Geiger

1913: Radio receiver, cascade tuning: Ernst Alexanderson

1913: Radio receiver, heterodyne: Reginald Fessenden

1914: Radio transmitter triode mod.: Ernst Alexanderson

1914: Liquid fuel rocket: Robert Goddard

1914: Tank, military: Ernest Dunlop Swinton

1915: Tungsten Filament: Irving Langmuir

1915: Searchlight arc: Elmer A. Sperry

1915: Radio tube oscillator: Lee DeForest



1916: Browning Gun: John Browning  
1916: Thompson submachine gun: John T. Thompson  
1916: Incandescent gas lamp: Irving Langmuir  
1917: Sonar echolocation: Paul Langevin  
1918: Super heterodyne: Edwin H. Armstrong  
1918: Interrupter gear: Anton Fokker  
1918: Radio crystal oscillator: A.M. Nicolson  
1918: Pop-up toaster: Charles Strite  
1919: the Theremin: Leon Theremin  
1919: First licensed radio station, KDKA AM, in Pennsylvania, USA

#### **1920s**

mechanical potato peeler: Herman Lay  
1922: Radar: Robert Watson-Watt, A. H. Taylor, L. C. Young, Gregory Breit, Merle Antony Tuve  
1922: Technicolor: Herbert T. Kalmus  
1922: Water skiing: Ralph Samuelson  
1923: Arc tube: Ernst Alexanderson  
1923: Sound film: Lee DeForest  
1923: Television Electronic: Philo Farnsworth  
1923: Wind tunnel: Max Munk  
1923: Autogyro: Juan de la Cierva  
1923: Xenon flash lamp: Harold Edgerton  
1925: ultra-centrifuge: Theodor Svedberg - used to determine molecular weights  
1925: Television Iconoscope: Vladimir Zworykin  
1925: Television Nipkow System: C. Francis Jenkins  
1925: Telephoto: C. Francis Jenkins

1926: Television Mechanical Scanner: John Logie Baird

1926: Aerosol spray: Rotheim

1927: Mechanical cotton picker: John Rust

1928: sliced bread: Otto Frederick Rohwedder

1928: Electric dry shaver: Jacob Schick

1928: Antibiotics: Alexander Fleming

1929: Electroencephelograph (EEG): Hans Berger

### **1930s**

1930: Neoprene: Wallace Carothers

1930: Nylon: Wallace Carothers

1931: the Radio telescope: Karl Jansky Grote Reber

1932: Polaroid glass: Edwin H. Land

1935: microwave radar: Robert Watson-Watt

1935: Trampoline: George Nissen and Larry Griswold

1935: Spectrophotometer: Arthur C. Hardy

1935: Casein fiber: Earl Whittier Stephen

1935: Hammond Organ: Laurens Hammond

1936: Pinsetter (bowling): Gottfried Schmidt

1937: Jet engine: Frank Whittle Hans von Ohain

1938: Fiberglass: Russell Games Slayter John H. Thomas

1938: Computer: Konrad Zuse

1939: FM radio: Edwin H. Armstrong

1939: Helicopter: Igor Sikorsky

1939: View-master: William Gruber

## 1940s

- 1942: Bazooka Rocket Gun: Leslie A. Skinner C. N. Hickman
- 1942: Undersea oil pipeline: Hartley, Anglo-Iranian, Siemens in Operation Pluto
- 1942: frequency hopping: Hedy Lamarr and George Antheil
- 1943: Aqua-Lung: Jacques Cousteau and Emile Gagnan
- 1943: electronic programmable digital computer: Tommy Flowers [1]  
(<http://c2.com/cgi/wiki?TommyFlowers>)
- 1944: Electron spectrometer: Deutsch Elliot Evans
- 1945: Nuclear weapons (but note: chain reaction theory: 1933)
- 1946: microwave oven: Percy Spencer
- 1947: Transistor: William Shockley, Walter Brattain, John Bardeen
- 1947: Polaroid camera: Edwin Land
- 1948: Long Playing Record: Peter Goldmark
- 1949: Atomic clocks

## 1950s

- 1951: Liquid Paper: Bette Nesmith Graham
- 1952: fusion bomb: Edward Teller and Stanislaw Ulam
- 1952: hovercraft: Christopher Cockerell
- 1953: maser: Charles Townes
- 1953: medical ultrasonography
- 1954: transistor radio (dated from the from Regency TR1) (USA)
- 1954: first nuclear power reactor
- 1954: geodesic dome: Buckminster Fuller
- 1955: Velcro: George de Mestral
- 1957: Jet Boat: William Hamilton
- 1957: EEG topography: Walter Grey Walter

1957: Bubble Wrap - Alfred Fielding and Marc Chavannes of Sealed Air

1958: the Integrated circuit: Jack Kilby of Texas Instruments, Robert Noyce at Fairchild Semiconductor

1959: snowmobile: Joseph-Armand Bombardier

#### **1960s**

1960s: Packet switching: Donald Davies and Paul Baran, video games

1960: lasers: Theodore Maiman, at Hughes Aircraft

1962: Communications satellites: Arthur C. Clarke

1962: Light-emitting diode: Nick\_Holonyak

1963: Computer mouse: Douglas Engelbart

1965: 8-track tapes: William Powell Lear

1969: the ARPANET, predecessor of the Internet

#### **1970s**

1970: Fiber optics

1971: E-mail: Ray Tomlinson

1971: the Microprocessor

1971: the Pocket calculator

1972: Computed Tomography: Godfrey Newbold Hounsfield

1973: Ethernet: Bob Metcalfe and David Boggs

1974: Scramjet: NASA and United States Navy -- first operational prototype flown in 2002

1974: Rubik's Cube: Ernő Rubik

1976: Gore-Tex fabric: W. L. Gore

1977: the personal computer (*dated from Commodore PET*)

1977: Atari 2600, the first commercial video game console

1978: Philips releases the laserdisc player

1978: Spring loaded camming device: Ray Jardine

1979: the Walkman: Akio Morita, Masaru Ibuka, Kozo Ohsonoe  
1979: the cellular telephone (first commercially fielded version, NTT)  
197x: Leaf blower (exact year unknown)  
1970s: Tomahawk Cruise Missile (first computerized cruise missile)

#### **1980s**

1981: the Xerox Star is the first computer to feature a WIMP graphical user interface  
1982: Sony and Philips release compact discs  
1983: the Internet Protocol, which created the Internet as we know it  
1983: Domain Name System: Paul Mockapetris  
1985: polymerase chain reaction: Kary Mullis  
1985: DNA fingerprinting: Alec Jeffreys  
1985: Tetris: Alexey Pajitnov  
1986: breadmaker  
1989: the GNU GPL, enabling the free software movement: Richard Stallman  
1989: the World Wide Web: Tim Berners-Lee

#### **1990s**

1991: genetically modified, herbicide tolerant soybeans developed  
1993: Global Positioning System  
1995: wiki software: Ward Cunningham  
1995: DVD standard developed  
1996: cloning of mammals: Ian Wilmut and others  
1997: Self-heating can  
1998: Portable digital audio player (MP3 player)  
1998: Personal video recorder  
1999: IEEE 802.11b

1999: Bluetooth

### **3rd millennium**

#### **21st century**

2001: Digital satellite radio

2001: Artificial heart.

### **References**

Bass, F. M. (1986). "The adoption of a marketing model: Comments and observations". In V. Mahajan & Y. Wind (Eds.), *Innovation Diffusion Models of New Product Acceptance*. Cambridge, Mass.: Ballinger.

Buzan, T. (1983) *Use Both Sides of Your Brain*, Dutton, New York.

De Bono, E. (1973) *Lateral Thinking: Creativity Step by Step*. Harper Colophon, New York

De Bono, E. (1992), *Serious Creativity*, Harper Collins, London.

De Bono, E. (1993), *De Bono's Thinking Course, Facts and on File*, New York

Csikszentmihalyi, M. (1999) *Creativity: Flow and the Psychology of Discovery and Invention*. HarperCollins Publishers, New York.

Christensen, Clayton M.;Raynor, Michael E. (2003). *The Innovator's Solution*. Harvard Business School Press. ISBN 1578518520

Christensen, Clayton M. (1997). *The Innovator's Dilemma*. Harvard Business School Press. ISBN 0875845851.

Crawford, M. (1994) *New Product Management*, 4th Edition, Irwin Co, Burr Ridge Ill., 1994.

*Design Synectics - Stimulating Creativity in Design*. Nicholas Roukes,

*Diffusion of Innovations*, by Everett M. Rogers, Free Press; 5th edition (August 16, 2003)

Language: English ISBN: 0743222091

Drucker, P. (1985) *The discipline of innovation*, Harvard Business Review, vol 63, May-June 1985, pp 67-72.

European Commission (1998), Innovation Management Techniques in Operation, European Commission, Luxembourg

FWTC, Fastest Way to Certainty (2005) McGraw Hill.

Gordon W.J. (1961) Synectics: the development of creative capacity. Harper and Row, New York

Ironmonger, D. (1972) New commodities and consumer behaviour, University of Cambridge Department of Applied Economics, Monograph 20, Cambridge University Press, Aberdeen, 1972.

Jaroslav M. Kulinski (2002) A Model of Situated Analogy in Design Faculty of Architecture University of Sydney NSW 2006, Australia

Lynn, G., Marone, J. and Paulson, A. (1996) Marketing and discontinuous innovation, California Management Review, spring 1996, pp. 8-37.

Mcgraw Hill, (2003) Dictionary of Engineering,

The Myth of Disruptive Technology article date: 08.17.04 John C. Dvorak PC Magazine 2005 Ziff Davis Media Inc.

The Selfish Gene by Richard Dawkins, Oxford University Press 1976, 2nd edition, December 1989, ISBN 0192177737

The Theory of Wages, J. R. Hicks, Macmillan, London, 1932.

Urban, G. and Hauser, J. (1993) Decision and marketing of new products, 2nd Edition, Prentice Hall, Englewood Cliffs, 1993.

Urban, G., Hauser, J. and Dholakia, N. (1987) Essentials of new product management, Prentice Hall, Englewood Cliffs, 1987. ISBN 0-13-286584-X

Venkatesh, V., & Davis, F. D. (2000). A theoretical extension of the technology acceptance model: Four longitudinal field studies. Management Science, (46:2), 186-204.

Wikipedia database

## Contents

16th century	302	categorizing	23
17th century	302	cause and effect	25
18th century	302	Chemical Engineering	48
19th century	304	Christensen	43, 318
1st millennium	300	Civil Engineering	49
20th century	311	Classical Physics	11
2nd millennium	301	Clayton Christensen	43
40 Innovation principles	39	codify experience	35
9th millennium BC	299	Cognitive Research (CoRT)	Trust 42
affinity	23	comparison	23
alikeness	23	comparisons	23
Altshuller	39	Concept Changing	34
analogous	23	concepts	34
Analogy	20	Conceptualise	28. See
Analogy Patterns	29	Contents	7
Appendix	37	continuum of history	13
Art 11		Constraints	24
BBC	42	Control Systems	49
Brainchild	47	Crawford, M	318
Brainwave	47	Create	47
<b>Building</b>	48	Create options.	37
Buzan	42	Csikszentmihalyi, M	318
Buzan, T.	318	Darwin	11



Dawkins	43	Figure 1 Innovation Continuum	14
De Bono	41	Figure 2 Dustpan and Brush	28
Deming	11	Figure 2 Innovation Taxonomy	26
Design	47	Figure 3 Analogy	20
Design Synectics	318	Figure 4 Perspective	35
deterministic	13	Figure 5 Effects	36
Dictionary of Engineering	319	Ford	11
Diffusion rate models	46	FWTC	38
ding similarities	23	Gordon	319
disruptive technology	43	History of Innovation	298
Disruptive Technology?	43	Idea	47
Dr. J. R. Hicks	44	Idealise	32, 37
Drucker, P	318	Ideality and IFR	33
	28, 32, 33	Ideation	47
dustpan	36	IFR Ideal Final Result	37
Dustpan	36	Induced innovation	44
Edison	11, 13	<b>Industrial Engineering</b>	118
effects	36	Innovate	47
effects database	36	Innovation Ballistics	19
Effects Database	36, 48	innovation continuum	27
Einstein	11, 13	Innovation Continuum	13, 15
<b>Electrical</b>	51	Innovation diffusion	44
<b>Electronic</b>	53	Innovation Paradigm	13
end to end process	36	Innovators	297
<b>Engineering</b>	73	Insights	23

Inspiration	47
Introduction	12
Invisible innovations	37
Is it useful?	37
John C. Dvorak	319
Kulinski	319
language	26
Language	47
Lateral Thinking	318
laws of nature	34
left and right brain	43
Level five	41
Level four	41
Level one	40
Level three	41
Level two	40
likeness	23
Machine	47
machines	34
Make and Move	34
make more with less	34
Make more with less	37
Marone	319
Massively parallel working	37
Master Your Memory	42
Maxwell	11

<b>Mechanical</b>	118
<b>Mechanical Engineering</b>	208
Meme	43
Michelangelo	11
Models of diffusion	44
Nesting	16
Newton	13
Next time faster	37
Notion	47
Only make what you can't steal	37
Ontology, Taxonomies & Language	25
Palaeolithic Era	298
paradigm	12
patents	34
Perception	47
Perspective	35
perspective is to choose a value system	35
phenomena	25
Pre-empt the future	37
Preface	11
Principles	37
probability wave	11
Product Archeology	31
Product Ballistics	31

Product Information Inheritance	17	Table 2 Idealise	32
Progress	12	Table 3 Transform	33
QFD	38	taxonomies	13, 26
Quantum Mechanics	11	taxonomy	13
References	318	terminology	26
resemblance	23	<i>The difference is merely a different set of ideas</i>	12
reusable	36	the ideal solution	40
Reuse	36	The Innovation Continuum	14
Reuse everything	37	The Innovation Paradigm – Replaced	2
rotary street sweeper	23	The Innovator's Dilemma	318
scientific	25, 34	The Problem with Innovation	13
scientific laws	16	The rate of diffusion	45
search engines	26	The Selfish Gene	319
Serious Creativity	318	The Triz 40 Inventive Principles	294
similitude	23	theories	13
Source methods	37	theory of cognition	35
Step One – Conceptualise	27	<b>Thermal Engineering</b>	252
Step Three – Transform	27	Think of 10 ideas choose 1	37
Step Two – Idealise	27	think outside the box'	42
stepping stones	16, 34	Thinking Course	318
Stepping Stones	15	thought timeline	16
stepping-stones	16	Three Steps to Innovation	27
Synectics	38	Transform	33, 37
systematic	40	Triz	39
Table 1 Conceptualise	28		

Turner's	11	Vision	47
Use Both Sides of Your Brain	318	vocabulary	26
vantage point	35	Wikipedia	319
Venkatesh	319	Work backwards from the result	37