ANNUAL MAINTENANCE NUMBER

In this Issue
SERVICING U. S. AIRPLANES ABROAD

DEC. 1941

AVIATION

The Oldest American Aeronautical Magazine

McGraw-Hill Publishing Company, Inc.

Price 50c. per copy

NIGHT FIGHTER

High over England the challenge of night bombing is being answered by specialized night fighter airplanes. One of the most effective of these has been the Havoc I, which packs speed, maneuverability, and devastating fire. This model of the famous Douglas DB-7 gets its power and speed from two dependable Twin Wasp engines.

PRATT & WHITNEY AIRCRAFT

EAST HARTFORD, CONNECTICUT

ONE OF THE THREE DIVISIONS OF UNITED AIRCRAFT CORPORATION

She's fit, Sir! Good Luck!

IT TAKES more than luck to carry a ten-ton bomber to its objective and get it back safely . . . 1,500 mile non-stop round trips (almost equal to a trans-Atlantic flight) operating on schedules like a commuters' train. It is not luck! It is fitness — fitness of crew, fitness of strut and wing, fitness of each of the thousands of separate parts that go to make up the powerful engines that pour surging power into a ship.

Aviation has made unbelievable progress since the Army, in 1909, gave the Wright brothers a $5,000 bonus for delivering a plane which flew two miles an hour faster than the forty miles called for. Forty miles per hour in 1909—100 miles per hour at the end of the last war—400 miles today! Much of the early advancement in speeds was made possible when Thompson Products developed the Silcrome Valve in 1921. Now Thompson is making sodium cooled valves that withstand for thousands of flying hours, the terrific heat and battering of today's bullet speeds.

THOMPSON PRODUCTS, INC.
Cleveland • Detroit • Los Angeles
Subsidiaries: Toledo • St. Catharines, Ont.

Manufacturers of over 1000 different aircraft engine and airplane parts, and original and replacement parts for the automotive industry. A pioneer of the sodium cooled aircraft engine valve.

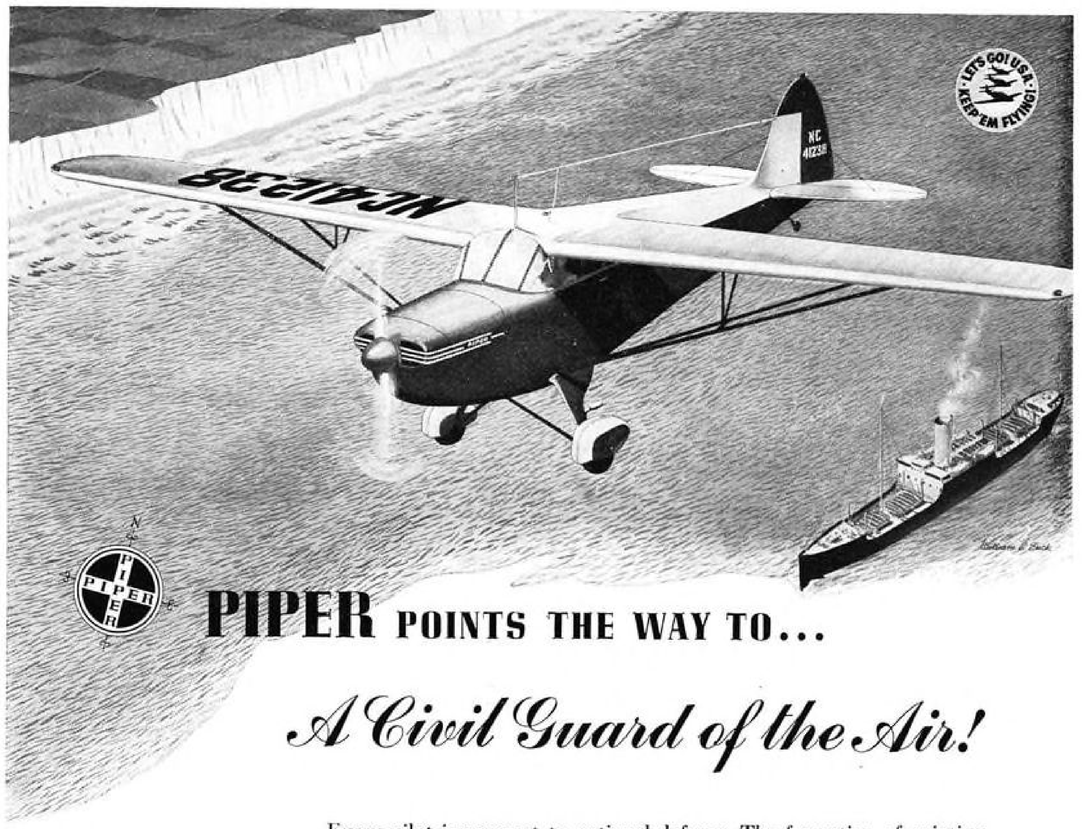

PIPER POINTS THE WAY TO...

A Civil Guard of the Air!

Every pilot is an asset to national defense. The formation of aviation home guard units among America's civilian fliers will find thousands of Piper-trained pilots and thousands of dependable Piper planes ready to make themselves available for service at a moment's notice. The private planes and pilots of embattled England are now rendering yeoman service on auxiliary patrol duty and communications maintenance. The time is at hand for the United States to weld its wealth of civilian airmen into coordinated groups for national defense . . . Minute Men of the Air . . . ready to leap at the call from desks, work benches and plows and to take wing for aerial guard duty, coastal patrol, terrain checking, pipeline and powerline protection, personnel transport and countless other missions for which the military lacks both pilots and equipment. Piper planes have proved themselves in peace. Now, in all sections of the country, they are ready for emergency service, with America's civilian pilots able and eager to devote their skill to whatever role may be assigned them in the interest of national defense.

FREE FOLDER

showing all the Piper planes will be sent you on request or may be obtained from your Piper Dealer. Or, if you wish a copy of the new Piper deluxe, full-color, 16-page catalog, it will be gladly mailed you, providing you enclose 10c in stamps or coin for postage-handling. Piper Aircraft Corporation, Department A121, Lock Haven, Penna., U.S.A.

FREE FLYING COURSE in his own plane is offered the purchaser of a new Piper. It consists of eight hours of dual flight instruction under a government-licensed instructor . . . take-offs, landings, taxiing and fundamental air maneuvers. At the completion of this free course the average person is ready to solo. Ask the Piper Dealer about the free flying course and for a free Piper plane flight demonstration.

PIPER

Tune in "Wings of Destiny" NBC Every Friday Evening
Continental "65" Piper Cub Given Away Each Week

OUTSELLS ALL OTHER LIGHT PLANES COMBINED

Published monthly, price 50c a copy. Allow at least ten days for change of address. All communications about subscriptions should be addressed to the Director of Circulation, 330 West 42nd Street, New York, N. Y.
Subscription rates—United States, Mexico and Central American countries, $3.00 a year, $4.00 for two years, $5.00 for three years. Canada $3.50 for one year. Great Britain and British Possessions 30 shillings per year, 60 shillings for three years. All other countries $5.00 a year, $10.00 for three years. Entered as second class matter, September 3, 1936, at the Post Office, Albany, N. Y., under the Act of March 3, 1879. Volume 40, Number 12.

Engineer to BUNTING READY to SHIP..

YOUR BEARING PROBLEM...

Manufacturers of machine tools and industrial machinery for years have been engineering to Bunting Bronze Standardized Bearings to improve performance, simplify production and service. Leading wholesalers and Bunting warehouses all over America maintain large stocks of these bearings in hundreds of sizes.

Because they are instantly available and fit all usual applications, these Precision-type Bunting Standardized Bearings are keeping machines running which otherwise would be idle, equipping machines which otherwise would be unfinished. They also can be made to meet many of the unusual bearing requirements by slight alterations.

Bunting also maintains large stocks of Standardized Bronze Bearings for every size and make of electric motor requiring sleeve-type bearings. These are ready for assembly, being completely finished to original designs and dimensional specifications.

Precision Bearing Bronze Bars, machined I.D., O.D., and ends, are available in hundreds of stock sizes.

Use the coupon or write for catalog.

BUNTING

Standardized Bearings .READY to USE

The metal used for Bunting Standardized Bearings is Bunting No. 72 (SAE 660), the alloy specified for years by the majority of machinery manufacturers.

...WE HELP YOU SOLVE IT

No matter how unusual the bearing requirement may be, it can be met by a Bunting Bronze Standardized Bearing in combination with proper lubricating methods and other details specially engineered for the application.

Bunting engineers will show you how to make Bunting Bronze Standardized Bearings wholly satisfactory in your applications. Advice, blue prints, technical data are freely and promptly supplied for lubrication, relationship of running clearances to rotative speeds, press fitting, oil and dust sealing, and all other details of a successful bearing installation.

This service costs you nothing. State your bearing problem. We will help you solve it with bearings which can be obtained promptly from wholesalers and Bunting warehouses everywhere . . . The Bunting Brass & Bronze Company, Toledo, Ohio. Warehouses in All Principal Cities.

Properly engineered oil grooves are readily machined into Bunting Bronze Standardized Bearings, thus assuring perfect lubrication. Typical standard examples are shown.

- BRONZE BUSHINGS
- BEARINGS
- PRECISION BRONZE BARS
- BABBITT METALS

THIS COUPON BRINGS THE CATALOG

THE BUNTING BRASS & BRONZE COMPANY
Toledo, Ohio Dept 13

Please send your free catalog of Bunting Standardized Bearings.

FIRM NAME _____

ADDRESS _____

CITY _____ STATE _____

YOUR NAME _____

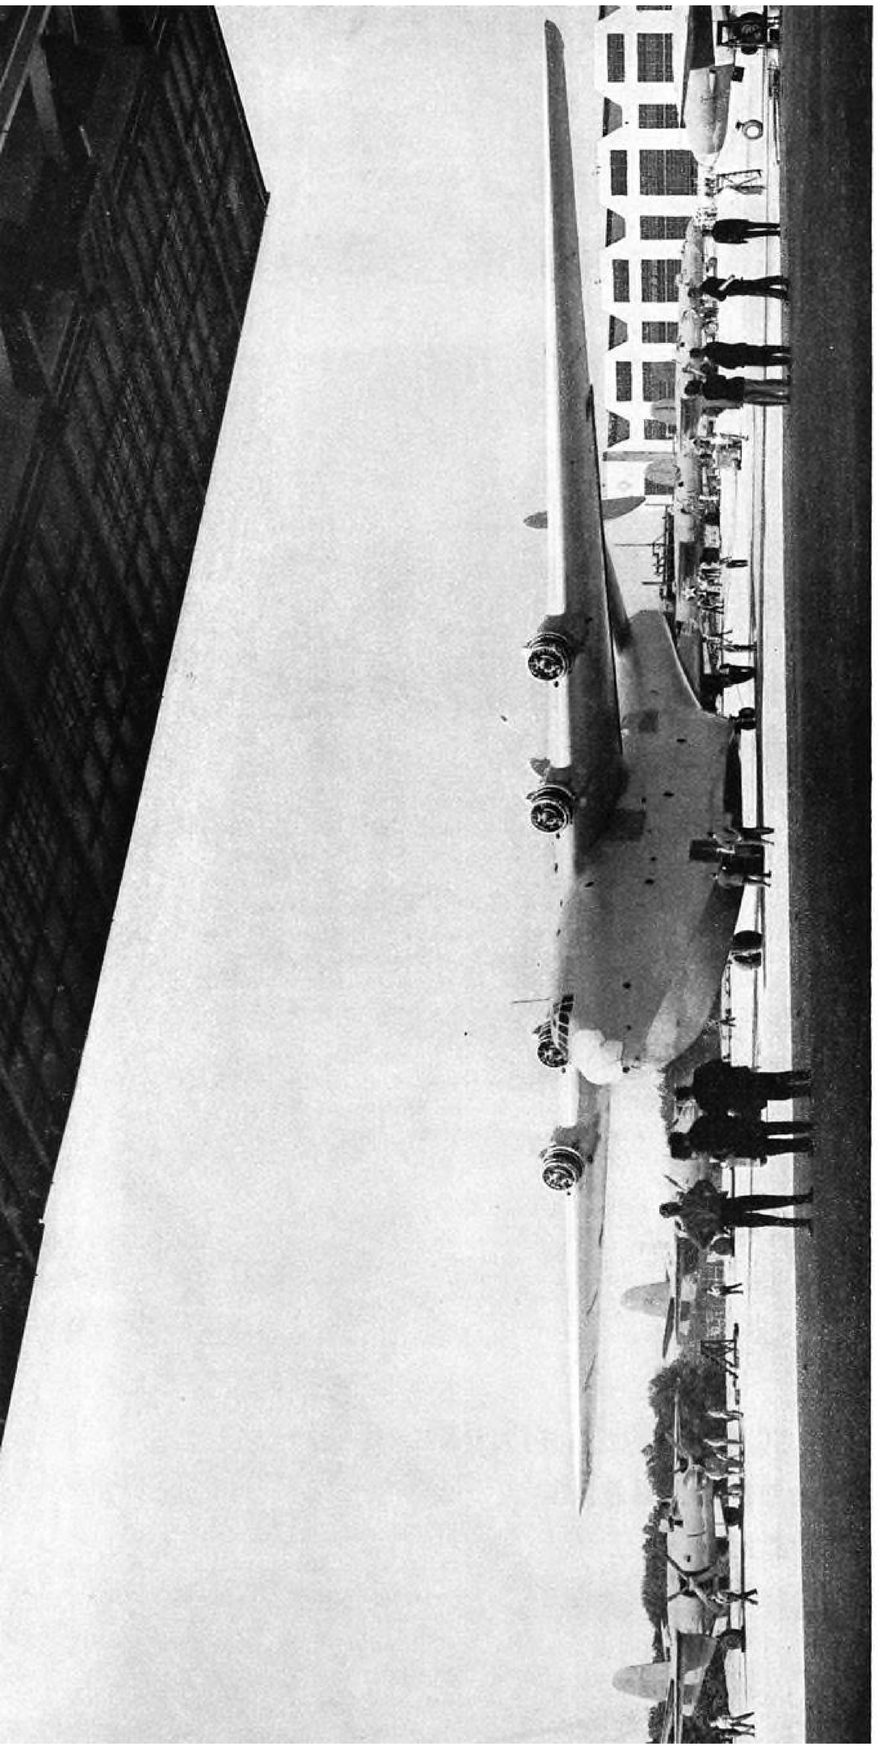

PREVIEW OF TOMORROW!

THROUGH THE WORLD'S LARGEST DOOR

A TRIBUTE to Martin engineers and workmen was the Navy's order to create the world's largest flying boat. The mighty XPB2M-1 introduces a new era in over-ocean flying. Your Navy, in foreseeing the need for such a plane, displayed the vision which has made American ships . . . both of the sea and of the air . . . second to none. In the XPB2M-1 the Martin Company has done more than give America a great new weapon . . . It has given the world a preview of the even greater flying boats yet to come . . . The Glenn L. Martin Company, Baltimore, Maryland, U. S. A.

Martin AIRCRAFT

Builders of Dependable Aircraft Since 1909

TRADE MARK

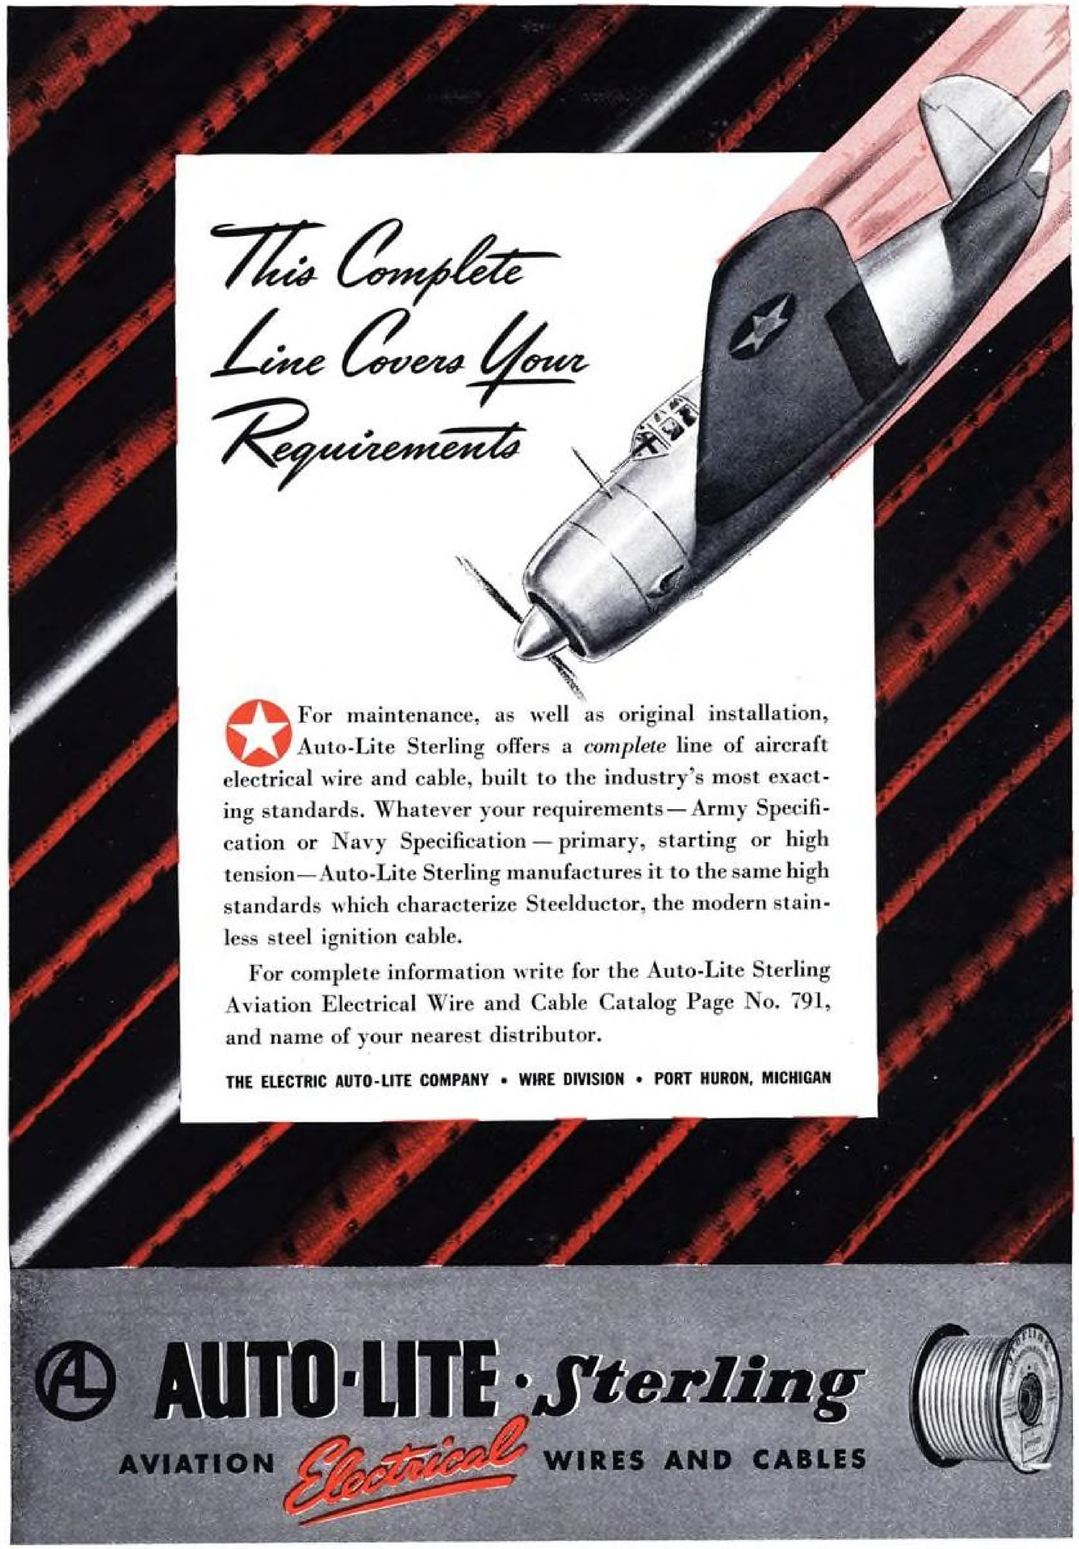

They're knurled! They lock!

UNBRAKO

Self - Locking

HOLLOW SET SCREWS

The knurled points automatically lock into place when the screws are applied with no more than average pull—HOLD TIGHT regardless of vibration! Yet "Unbrako" Self-Lockers are as easily removed as applied—can be used over and over again.

UNBRAKO

Reg. U. S. Pat. Off.

famous for years as the

KNURLED SOCKET HEAD CAP SCREW

with no premium price!

Every mechanic prefers to use his fingers instead of a wrench. The cold-forged knurled heads — dry or oily — gear right to the fingers, no slip, no loss of time and with the wages paid today time is indeed money.

The knurls serve also to lock the "Unbrako".

The KNURLING of Socket Screws originated with "UNBRAKO" years ago.

STANDARD PRESSED STEEL CO.
JENKINTOWN, PENNA. Box 566
BRANCHES
BOSTON · DETROIT · INDIANAPOLIS · CHICAGO · ST. LOUIS · SAN FRANCISCO

BALL BEARING DO'S AND DON'TS FOR MECHANICS

We all thought Gus would bust a blood vessel the time he catches Willie Doolittle – that's one of our mechanics – wiping out unshielded ball bearings with a piece of dirty waste. "First time in yer life y' ever did anything y' weren't told to do," growls Gus, "I mighta known it'd be wrong . . ."

GUS SAYS "DON'T!"

DON'T forget an unshielded bearing is just about 13 times as delicate as the shielded control bearings I been telling you about.

DON'T wash the lubricant from bearings and let them lie overnight. Dry bearings will start to rust in a few hours.

DON'T press a ball bearing onto a shaft by pressing or hammering on the outer ring.

Unshielded Bearings

Fifth of a series of instruction sheets published by The Fafnir Bearing Company, based on its experience with the leaders of U. S. aviation.

ALL THE RULES previously listed in these pages for control bearings apply even more strongly on unshielded bearings; those used in engines and engine accessories, for example.

DIRT MUST BE kept out of these bearings at all costs – don't even unwrap them until you're ready to install them.

FITS ARE EVEN CLOSER with unshielded bearings than the usual control applications. So be sure shafts are square, shafts and housings are not out of round, and fits are snug but not cramped.

WHERE SHOULDERED housings or shafts are used, be sure to press bearing all the way home, pressing only on inner ring for shaft mounting, only on outer for housing mounting.

CHECK MOUNTED bearing to be sure it runs free. If it is mounted in an accessory part, tape it to keep it clean until part is ready for final assembly. If this *is* final assembly, be sure mis-alignment doesn't cramp bearing.

ALWAYS REMEMBER, dirt and dust are ball bearings' worst enemies. And that most bearing failures can be traced to installation errors or carelessness. If you're "stuck" with a bearing problem, you can always get help from The Fafnir Bearing Company, Aircraft Division, New Britain, Connecticut.



DELICATE AS A WATCH
– TILL YOU INSTALL THEM

TOUGH AS A DIAMOND
– AFTERWARD

FAFNIR
Ball Bearings
FOR AIRCRAFT ENGINES AND CONTROLS

WRING IT OUT ALL YOU WANT

ALMOST any good plane can be safely slow-rolled by an *expert*. But the Fairchild Trainer was designed with an extra broad margin of stamina for the stresses imposed by the aerobatics of a beginner. After thousands of hours with the Army Air Corps, the CPTP, and the CAA, the Fairchild Trainer has amply demonstrated its tolerance for the abuse of the heavy-handed fledgling, as well as its sensitive response to the precision aerobatics of the experienced pilot.

And, right side up, that wide, rugged landing gear takes five-foot-high landings—prevents ground loops—assures continuous service *in the air*.

FAIRCHILD AIRCRAFT

Division of Fairchild Engine & Airplane Corp.
Hagerstown, Maryland . . Cable Address "Faircraft"

FOR THE DEFENSE OF YOUR FUTURE



THIS TOWER OVERLOOKS AVIATION'S MOST DISTINGUISHED SCHOOL OF AERONAUTICS

The popgun makes a fine racket, but if your life were at stake, you'd never hesitate in selecting the powerful, accurate, deadly machine gun . . . . and YOUR LIFE IS AT STAKE when you select the training to prepare yourself for a career in aviation. The national emergency has enabled thousands of men to "hit" the aviation industry for temporary, single-phase jobs with the popgun of cheap "quickie" courses. BUT — Aviation's leaders will entrust responsible supervisory positions only to men with the "firepower" to reach and hit any target placed before them. The executives who have made aviation THEIR career know that the value of each man is governed by two factors: his serious purpose in selecting aviation as his life-work, and the ability and experience of those who train him for that career. They know that Curtiss-Wright Technical Institute graduates are — and for many years have been — thoroughly qualified to fill the industry's most exacting requirements.

Located in the very center and a very important part of Southern California's great aircraft industry, with its more than a billion dollars in unfilled orders, Curtiss-Wright Tec has come to be recognized as the nation's leading institution for the training of Aeronautical Engineers and Master Mechanics. Mr. Donald Douglas, President of the great Douglas Aircraft Company, chose this school for his own son's training, which pointedly indicates the high standing Curtiss-Wright Tec has attained in the aircraft industry since its establishment in 1929.

It is imperative that before you invest in a course of career training you determine what the returns will be on your investment . . . for your choice of a school in which to take your training will determine how much money you will make all the rest of your life.

Curtiss-Wright Tec's career training is carefully designed to do just one thing:—TO MAKE MONEY FOR YOU, so upon graduation you can be independent and self-supporting for life. Our thousands of successful graduates have proven that Curtiss-Wright Tec training gets results and always pays, since it trained them in advance for the highest position they could ever expect to occupy. It can do the same for you.

This school has never guaranteed positions for its graduates, but practically every graduate has obtained immediate employment and is advancing rapidly. The demand for our graduates far exceeds the supply, and we honestly believe that every student who enrolls here will be able to obtain, with our assistance, immediate employment upon graduation.

WARNING! —"Don't miss the boat." The greatest opportunity in your lifetime exists today! There never was such an opportunity in aviation for you; there may never be another. A position awaits you. Insure for yourself a steady income and independence for life. DON'T FOLLOW — LEAD! Send in your enrollment before you "miss the boat."

Offering specialized and proven training in AERONAUTICAL ENGINEERING & MASTER MECHANICS

No Flying Involved

CURTISS WRIGHT TECHNICAL INSTITUTE

GRAND CENTRAL AIR TERMINAL 1226 AIRWAY GLENDALE (LOS ANGELES) CALIF
UNDER PERSONAL SUPERVISION OF MAJOR C. C. MOSELLY, OWNER, SINCE ITS ESTABLISHMENT IN 1929

Contractor to the U. S. Army Air Corps

BE WISE—PROTECT YOUR FUTURE

MAIL TODAY • DON'T DELAY

WITHOUT COST OR OBLIGATION SEND ME FULL INFORMATION AND CATALOG ON THE COURSE CHECKED BELOW

- ☐ AERONAUTICAL ENGINEERING COURSE
- ☐ MASTER AVIATION MECHANIC COURSE
- ☐ SPECIALIZED ENGINE COURSE
- ☐ SPECIALIZED AIRPLANE COURSE
- ☐ SPECIALIZED AIRCRAFT WELDING COURSE
- ☐ POST GRADUATE AERONAUTICAL ENGINEERING COURSE
- ☐ SPECIALIZED AIRCRAFT SHEET METAL COURSE
- ☐ AERONAUTICAL DRAFTING COURSE, HOME STUDY
- ☐ AIRCRAFT BLUE PRINT READING COURSE, HOME STUDY

NAME

ADDRESS

CITY STATE AV-12

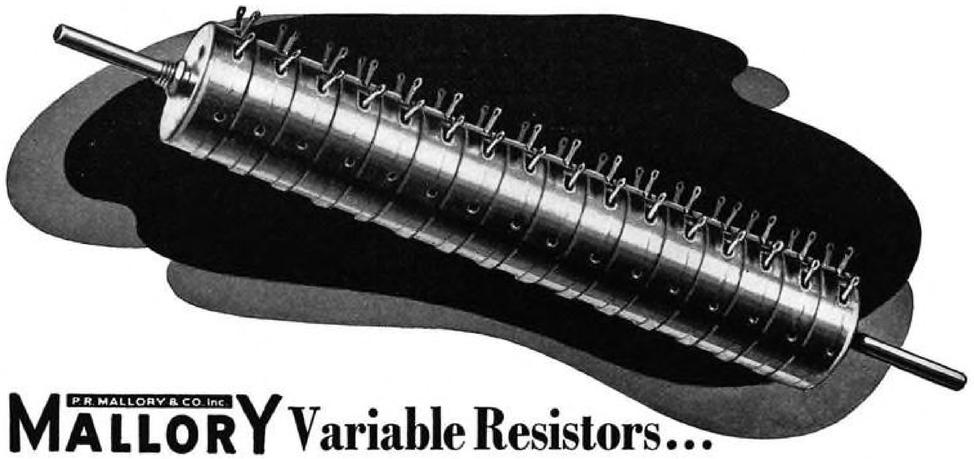

P.R. MALLORY & CO. Inc. MALLORY Variable Resistors...

Single Gang...or 16 Gang...It's all in a day's Orders!

M TYPE VARIABLE RESISTOR
Insulated contact arm, dissipates 4 watts. 281° effective electrical rotation.

C TYPE VARIABLE RESISTOR
Grounded contact arm, dissipates 2 watts. 266° effective electrical rotation.

E TYPE VARIABLE RESISTOR
Grounded contact arm, dissipates 9 watts. 304° effective electrical rotation.

A prominent manufacturer of regulating devices needed a special potentiometer of 16 gangs and needed it quickly. The problem was presented to Mallory engineers, the job put into production, finished and delivered *on time* and *right* from every standpoint.

Solve a problem . . . fill a need . . . find a new way . . . They're all in a day's orders for Mallory engineers.

In addition to the standard wire-wound rheostats and potentiometers shown at the left, Mallory also manufactures and stocks high-resistance, carbon element controls in both standard and midget types . . . values from 5000 ohms to 9 megohms. Special construction features insure noiseless operation.

Manufacturers in many fields have turned to Mallory Variable Resistors, potentiometers, rheostats and attenuators for laboratory equipment, test and production devices where quiet action and critical adjustments are needed.

P. R. MALLORY & CO., Inc., INDIANAPOLIS, INDIANA
Cable Address—PELMALLO

Send for this catalog

Be sure of a handy reference to the entire Mallory line of approved precision products. It will save time and money.

The Americas depend on both...

From Canada to the Argentine 22,000 pilots are being trained each year.

The Western Hemisphere depends on these new men for its impregnable air defense... just as the training of thousands of these pilots has depended on the reliability of Kinner Engines.

Throughout North and South America—in Canada under the British Commonwealth Air Training Plan, in the U. S. Army and Navy, and in many of the Republics to the South—Kinner Engines are depended on for primary training.

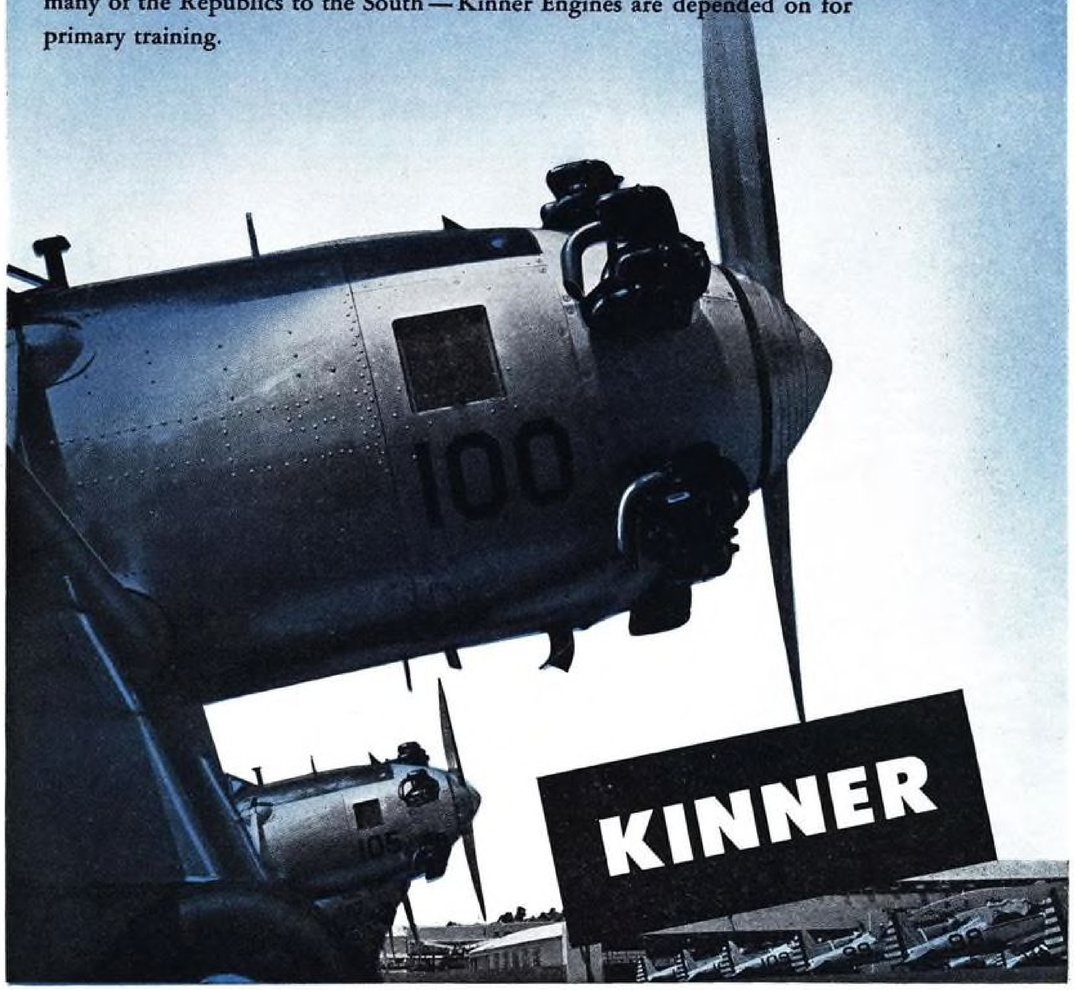

KINNER MOTORS, INC., GLENDALE, CALIFORNIA, U.S.A.

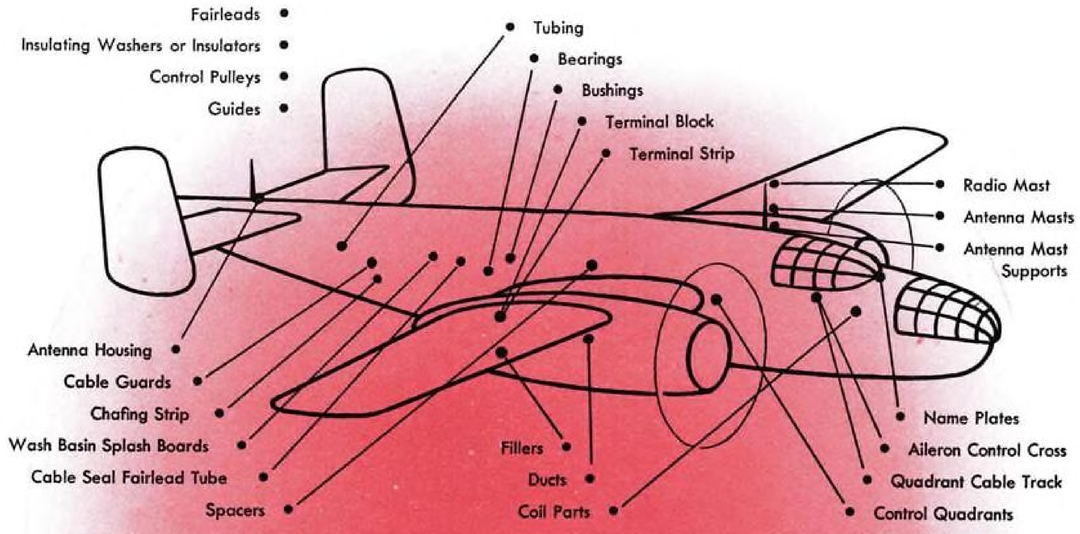

Micarta

helps build U.S. Air Supremacy

When critical material shortages threaten to hand you a wallop below the production line—call in Westinghouse Micarta.

This heavy-duty plastic is a tried and proven veteran of aviation service.

In addition to the uses illustrated above, it is now being applied in many other ways . . . to replace parts formerly die-cast, forged or machined . . . as a substitute for materials at present unavailable.

Micarta weighs approximately one-half as much as aluminum of equal strength, withstands vibration, flexes without fatigue, insulates like Mica and fabricates easily.

Micarta reduces noise and dampens vibration . . . pound by pound in compression, it exceeds the strength of structural steel. It resists corrosion and moisture, is unaffected by cold and heat . . . wears slowly and evenly, provides low bearing clearances.

Let Westinghouse Micarta help relieve critical material shortages.

J-06314

Westinghouse

AVIATION MICARTA

DEPOSIT A-C POWER... withdraw accurately controlled surges of D-C current for more uniform welding of aluminum

Tough job, aluminum welding. You need comparatively high voltage in a narrow current range. Aluminum and other alloys used in modern planes have a very narrow plastic range. How to get the exact welding current you need without disruptive surge demands on power systems, without installing costly auxiliary equipment, has long been a problem.

CONDENS-O-WELD solves the problem. Energy is drawn from a 3-phase a-c power line, rectified, stored electrostatically and released in accurately controlled discharges to the welding machine. A complete, compact, enclosed unit, Condens-O-Weld can be used with any electrostatic stored energy type resistance welder.

With precision control of voltage, current and wave form, aircraft producers are getting welds of uniform strength and soundness not possible with any previous method. If your welding problem demands action now, you'll be glad to learn that Condens-O-Weld units are *ready now!* For detailed data, write Westinghouse Electric & Manufacturing Company, East Pittsburgh, Pa., Dept. 7-N.

J-21173

Westinghouse CONDENS-O-WELD

***MORE DIFFERENT KINDS OF SNOWPLOWS ARE MOUNTED ON FWD TRUCKS THAN ANY OTHER MAKE OF TRUCK OR TRACTOR**

OPEN airports all through the winter are vital to National Defense and passenger flying schedules as well. First choice for the fastest, lowest in cost, most dependable method of combating snow — keeping 'em flying by keeping airport runways clear and clean — is the FWD truck.

Unbiased surveys covering every state in the snowbelt and many Canadian provinces (where heavy snowfalls are a constant menace) prove that FWD's are a 4 to 1 choice for this severe service.

Canadian airports — from Newfoundland to the Yukon — use more than 85 FWD trucks, keeping landing fields and runways clear of the heavy snows typical of the Canadian winter.

The ability to smash through the deepest drifts — to knife its way through hard-packed snow and ice — the full power and traction of four driving wheels — the capacity to do a clean job faster—and still be thrifty with operating costs — these are but a few of many reasons why FWD is the No. 1 choice with experienced airport operators everywhere.

FWD TRUCKS
—THE PREFERRED TRUCK FOR FAST, LOW-COST AIRPORT SNOW CLEARING

SNOW REMOVAL PERFORMANCE *Unmatched* BY ANY OTHER MAKE OF TRUCK OR TRACTOR

FWD trucks were first in the field of motorized snow equipment and have held their preeminent position ever since snow removal began to be accepted practice in airport operation. There are many reasons why FWD's out-perform all other types of equipment in this gruelling service.

An ordinary motor truck merely equipped with a snowplow attachment seldom stands up to the job, because you need the ruggedness and stamina of an FWD with its balanced power on all four wheels — its double, positive traction, a truck that's "tailor-made" for the tough job of bucking deep heavy snow drifts.

You need FWD's special heat-treated steels developed to provide the maximum of resistance against failure in sub-zero temperatures—you need its special gear ratios—its tremendous reserve power — its full and balanced traction of four driving wheels — its properly calculated weight distribution that gives it stability on bumpy, slippery surfaces.

Rotary plows, "V" plows, plows of every practical type can be swiftly and securely mounted on FWD's because they have been designed with proper snowplow mounting facilities. More different kinds of snowplows are mounted on FWD trucks than any other make of truck or tractor.

When you buy an FWD you get a truck that is not only the best of its kind for snow removal service but also a truck that yields the biggest return on the investment because of its all-season usefulness on regular maintenance jobs around the airport.

Write for the complete FWD performance record on airport snow removal and other maintenance service.

THE FOUR WHEEL DRIVE AUTO CO., *Clintonville, Wis., U.S.A.*

Canadian Factory, KITCHENER, ONTARIO

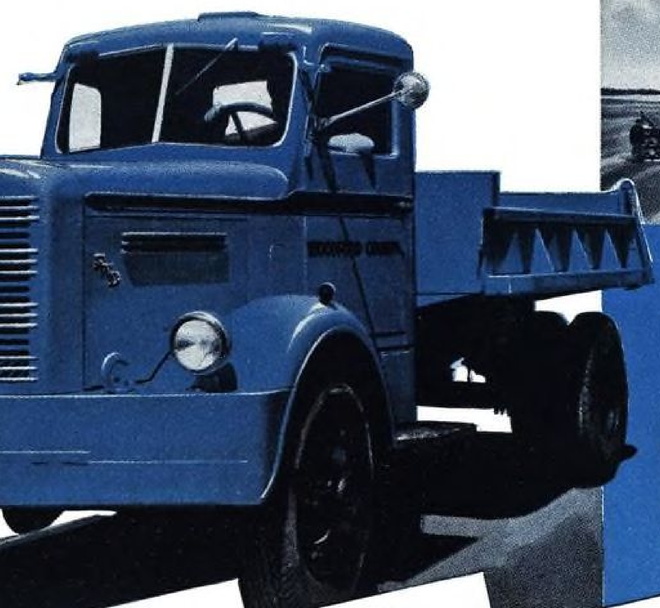

Hundreds of FWD's, equipped with "V" plows, rotary plows, and plows of every description will combat and conquer the menace of snow-blocked landing fields and keep airports open all through the winter.

Many of the leading airports of the United States and Canada find FWD trucks indispensable—equipment that is seldom idle at any season of the year and yielding a full return on the investment.

Prompt dispatch of planes goes on right through the winter with an FWD keeping runways clear. New developments and methods for airport maintenance are given thorough and practical tests under actual conditions at the municipal airport at Clintonville, where FWD's are built.

FWD TRUCKS

1 No swerving—FWD's front driving and pulling wheels hold the truck to a straight line.



2 Removing the front bumper from the FWD provides a conveniently, completely drilled, square frame for rigid snowplow mounting.



3 With snowplow in place, an FWD carries approximately 50% of its weight on each axle — insures proper balance for easy handling.

4 Complete safety for the driver —FWD cabs are sealed against carbon monoxide infiltration.



5 Full traction — all the weight distributed on both axles of the FWD is used in aiding the full powered traction.

ONLY THE FWD FOUR-WHEEL-DRIVE TRUCK PROVIDES SO MANY OUTSTANDING SNOW REMOVAL ADVANTAGES

In flight, the U. S. Navy's **Consolidated PB2Y.** At the take-off, a Navy **Consolidated PBY.** Export versions of the **PBY** are also in service for the British, Canadian, Australian and Dutch East Indies Governments.

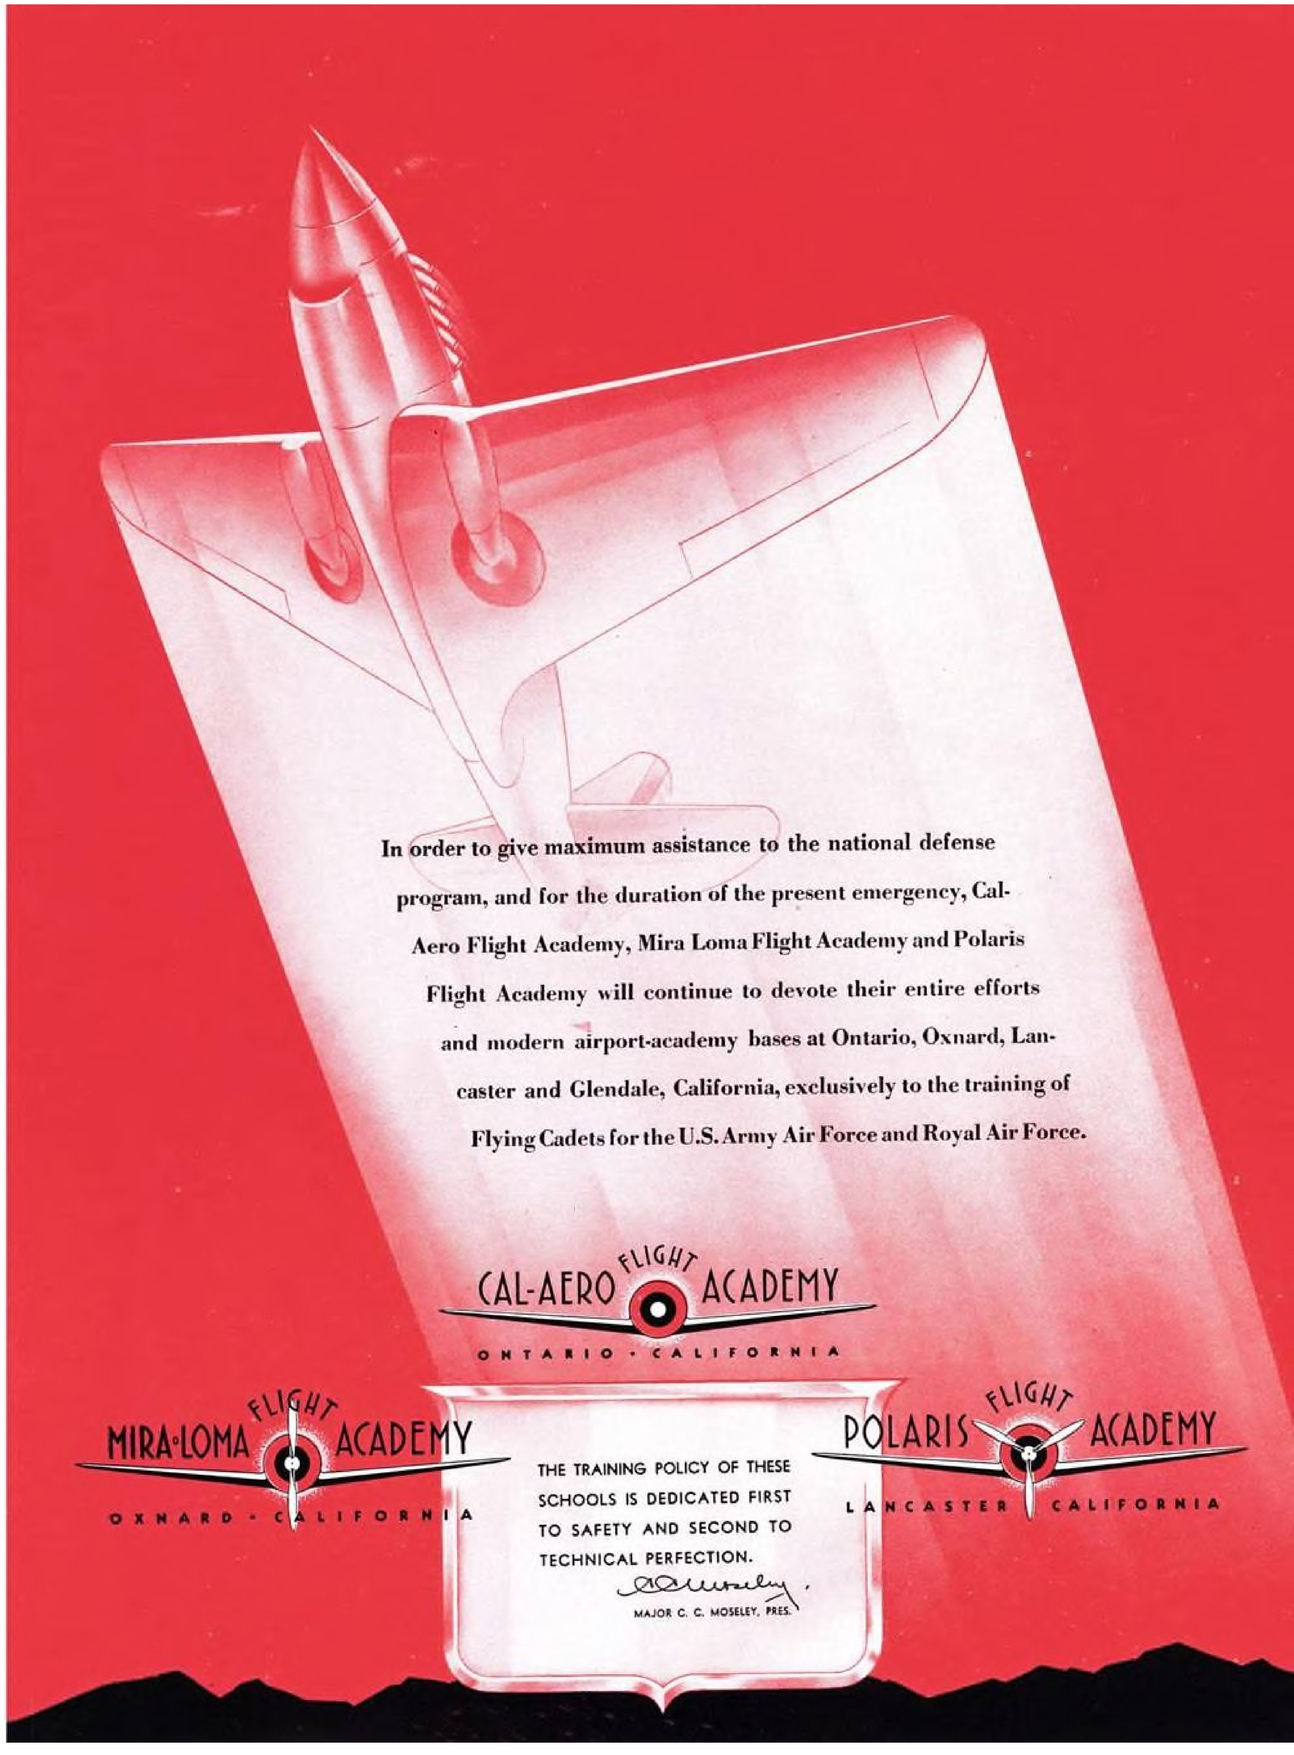

FEDERAL
Aircraft
BEARINGS

The name "FEDERAL" on Aircraft Ball Bearings is definite assurance of QUALITY. It means dependable performance at all times and under all conditions — signifying PRECISION, ACCURACY and STRENGTH.

THE FEDERAL BEARINGS CO., INC.

Makers of Fine Ball Bearings

POUGHKEEPSIE, N. Y.

Detroit Office: 2640 Book Tower • Cleveland Office: 402 Swetland Building
Chicago Office: 902 S. Wabash Ave. • Los Angeles Office: 5410 Wilshire Blvd.

TRADE MARK

Leaders Look to FLEETWINGS for Parts

Brewster, Douglas, Republic, Vega, Vought-Sikorsky, Vultee . . . names that are sky-writing history . . . are among the many who look to Fleetwings for control-surfaces of aluminum alloy or stainless steel and other parts. ★ "Fleetwings" is a descriptive as well as a firm-name when it comes to putting speed into the making of fins, stabilizers, elevators, flaps, rudders, ailerons, spoilers and other parts. ★ If you are in need of a dependable sub-contractor — one who can meet your production schedules — look to Fleetwings!

Fleetwings pioneered stainless steel for aircraft and is today the world's largest manufacturer of structural aircraft parts and airplanes of stainless steel.

FLEETWINGS

Incorporated

Bristol • Pennsylvania

FLORSHEIM SHOES

Designed and Built

Expressly for Military Wear

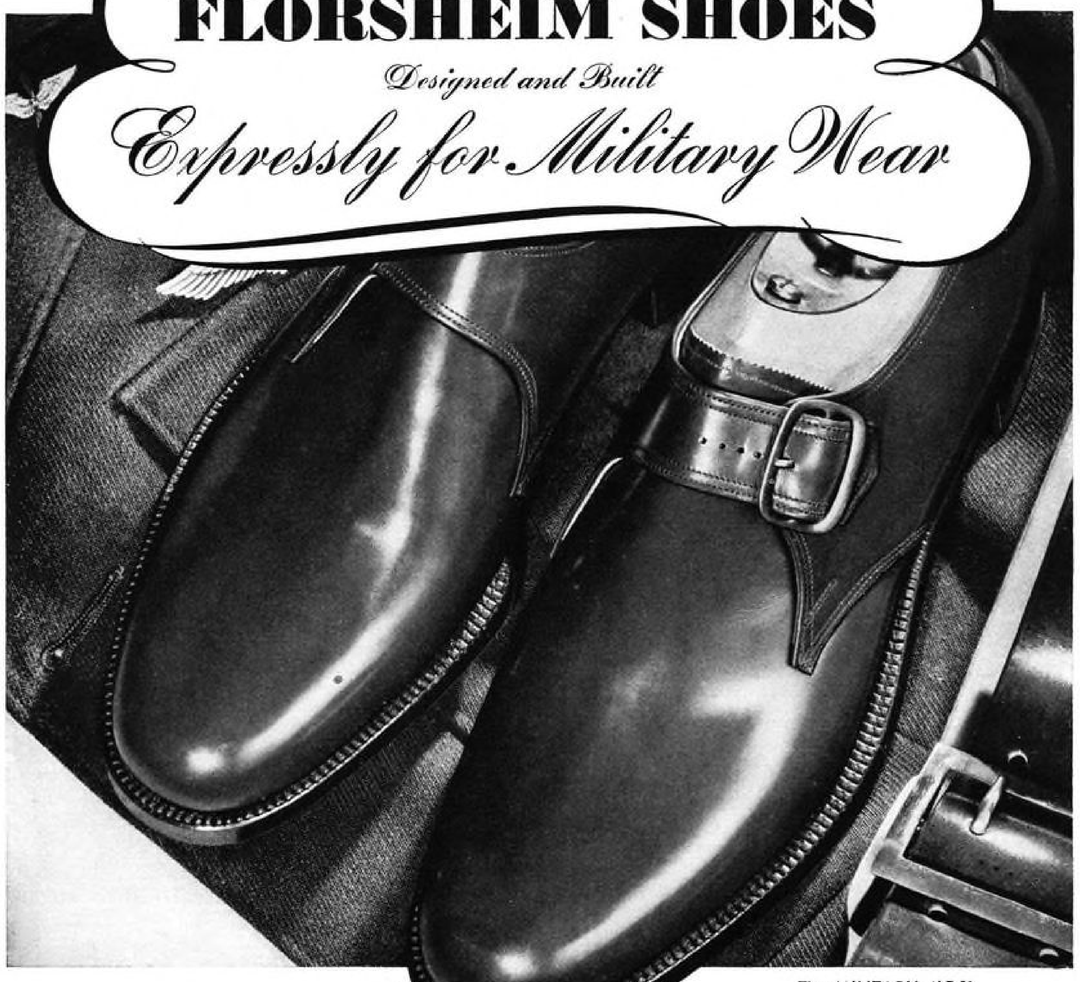

The MILITARY, $10.50

The FLORSHEIM Shoe

We made them at the request of thousands of reserve officers, who were accustomed to the superior fit, comfort, and wear of Florsheim civilian styles. When called up for active duty, they helped us design a special last to meet all Military specifications: straight inside line; extended rubber heel; arch-cradling shank, and seamless, chafeless quarter-linings. This last is now reserved exclusively for Florsheim Military Styles... the shoes worn today by more Army, Navy, Marine, Air Corps, and Coast Guard officers than any other Quality line!

$10 Most Regular Styles

WRITE FOR THE ADDRESS OF YOUR NEAREST FLORSHEIM DEALER OR STORE

THE FLORSHEIM SHOE COMPANY • CHICAGO • *Manufacturers of Fine Shoes for Men and Women*

BUILD LIGHTER... ASSEMBLE *Faster...*

WITH THE *Speed Nut System* PATENTED

In every assembly location where SPEED NUTS or SPEED CLIPS have replaced conventional fastenings, immense weight reduction has been made. In many cases they actually saved 70% to 80% of the weight. That is why we say BUILD LIGHTER with SPEED NUTS.

SPEED NUTS are manufactured from high carbon spring steel and accurately heat treated. They are the only one piece fastening devices with a double spring tension lock. Severe vibration tests proved that SPEED NUTS are four times tougher in resistance to vibration loosening. And SPEED NUTS are applied so fast that time saved frequently exceeds 50%. This is why we say ASSEMBLE FASTFR with the SPEED NUT SYSTEM.

Defense production lines move faster at lower cost with the SPEED NUT SYSTEM and deliver a completed product that stands the punishment of extreme vibration. Send us your assembly details now and we will mail samples and engineering data promptly.

TINNERMAN PRODUCTS, INC.
2070 Fulton Road, Cleveland, Ohio
IN CANADA: Wallace Barnes Co., Ltd., Hamilton, Ontario
IN ENGLAND: Simmonds Aerocessories, Ltd., London

OVER A BILLION IN USE—OVER 700 SHAPES AND SIZES

☆ ☆ ☆ True Flight and "Happy Landings" for our *Flying Cadets*

SINEWS OF STEEL, as trustworthy as modern engineering can make them, control the vital tail assembly of this trainer —responding to the slightest touch by the pilot.

MEET GOVERNMENT SPECIFICATIONS

American Tiger Brand Aircraft Strand and Cords are available in either tinned, galvanized, or U·S·S Stainless Steel, in the following construction:

19-wire Strand	semi-rigid
7 x 7 Cord	flexible
7 x 19 Cord	extra-flexible

AMERICAN *Tiger Brand* **AIRCRAFT STRAND AND CORDS**

. . . their safety is guarded by sinews of the finest steel!

YOU'LL find American Tiger Brand Aircraft Strand and Cords in a large percentage of the planes that are rolling off the production lines these days—*for these very important reasons:* Only the finest steels —tested and retested many times—go into the manufacture of Tiger Brand Strand and Cords. Every wire of every cable is cold drawn to high-tensile strength through precision dies. Minimum stretch, high fatigue resistance and superior strength are in-built features. Every detail of their production is under the supervision of men who specialize in the making of control cables that are as sound and trustworthy as modern science and modern manufacturing equipment can make them.

American Tiger Brand Aircraft Strand and Cords meet, and safely exceed, all requirements of the latest U.S. Army and Navy specifications.

AMERICAN STEEL & WIRE COMPANY

Cleveland, Chicago and New York

Columbia Steel Company, San Francisco, *Pacific Coast Distributors* United States Steel Export Company, New York

UNITED STATES STEEL

HOLDING TIME BY THE TAIL

Airlines Save Years in Defense

HOLDING back the clock . . . turning travel hours into work time, the airlines are helping this country's defense production overtake in months a head start of years. Key men transported across the country or over oceans in a matter of hours—materials, plans, blueprints on hand when and where needed—these are the contributions of the airlines.

Organized and equipped for normal peacetime traffic, the airlines were abruptly assigned a key role in defense. They accepted the job calmly and without show—training personnel, extending routes, and increasing schedules without relaxing either vigilance or quality of service. No gauge can measure America's debt to the airlines for the thousands of productive hours that otherwise would have been lost forever.

3000 Man-years Saved in 1941

For each 100 miles flown, 1 hour and 42 minutes is saved over the next fastest mode of travel. Flying over 1,500,000,000 passenger miles, the airlines have saved 3000 man-years in 1941. Designed to speed traffic is this new Airlines Terminal building in midtown Manhattan.

WRIGHT AERONAUTICAL CORPORATION

A Division of Curtiss-Wright Corporation • Paterson, New Jersey

AN *Improved* PROTEK-PLUG*

THE ANTI-CORROSION TREATMENT FOR AIRCRAFT ENGINES AND ACCESSORIES

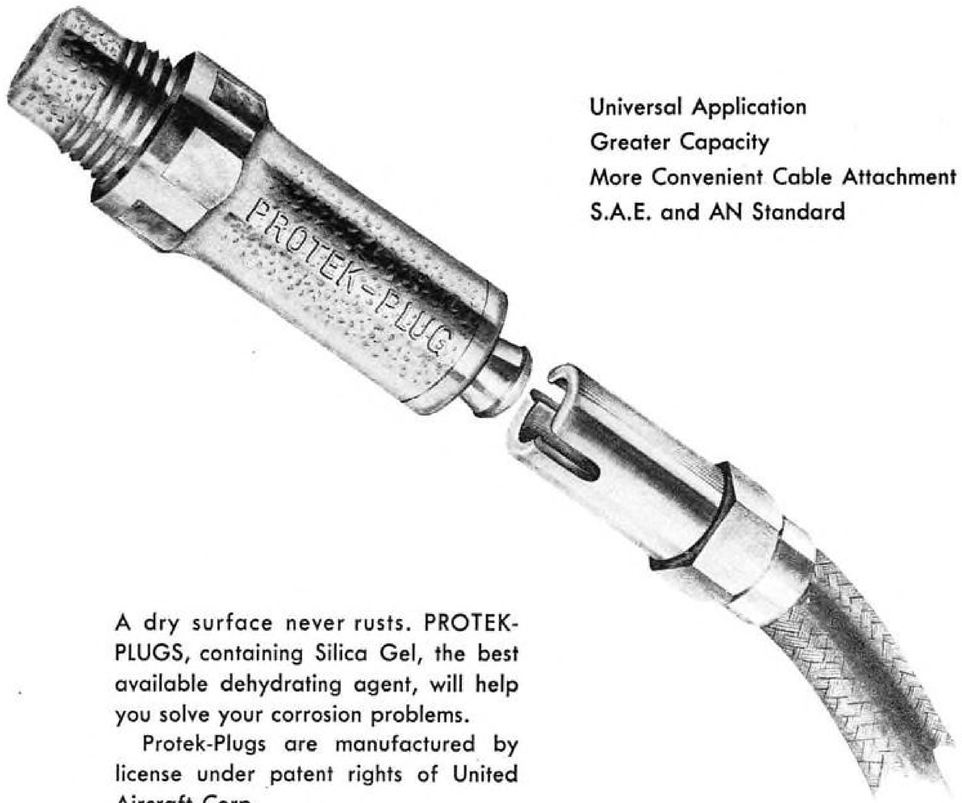

Universal Application
Greater Capacity
More Convenient Cable Attachment
S.A.E. and AN Standard

A dry surface never rusts. PROTEK-PLUGS, containing Silica Gel, the best available dehydrating agent, will help you solve your corrosion problems.

Protek-Plugs are manufactured by license under patent rights of United Aircraft Corp.

*Trade mark Reg. U.S. Pat. Off.

PROTEK-PLUGS are a product of

Chandler Evans Corporation

SOUTH MERIDEN, CONN.

Manufacturers of Aircraft Carburetors, Fuel Pumps and Accessories.

Plug-in convenience for ferrying operations

BENDIX has combined a compact range filter with an audio adapter, providing a completely portable unit for ferry flights, or permanent installation in existing equipment.

A switch selects voice, range or both, and a cord and plug connect the adapter to the receiver output. Two jacks are available for headphones.

The filter unit, which is available separately, provides the maximum necessary attenuation of unwanted signals and is identical to that used in range transmitter—48 DB. It has also been made to match a low impedence receiver and one or two low impedence headphones. The filter measures 3⅞" x 3¼" x 2¼" and weighs 1 lb. 14 oz.

Complete data will be furnished recognized firms on request.

BENDIX AVIATION, LTD.

Subsidiary of Bendix Aviation Corporation

NORTH HOLLYWOOD • CALIFORNIA

INTERPHONE SYSTEMS • TRANSMITTERS • COMMUNICATION UNITS • RANGE FILTERS • CONTROL PANELS • JACK BOXES • ANTENNA SWITCHES • MICROPHONES

Maintenance that duplicates production

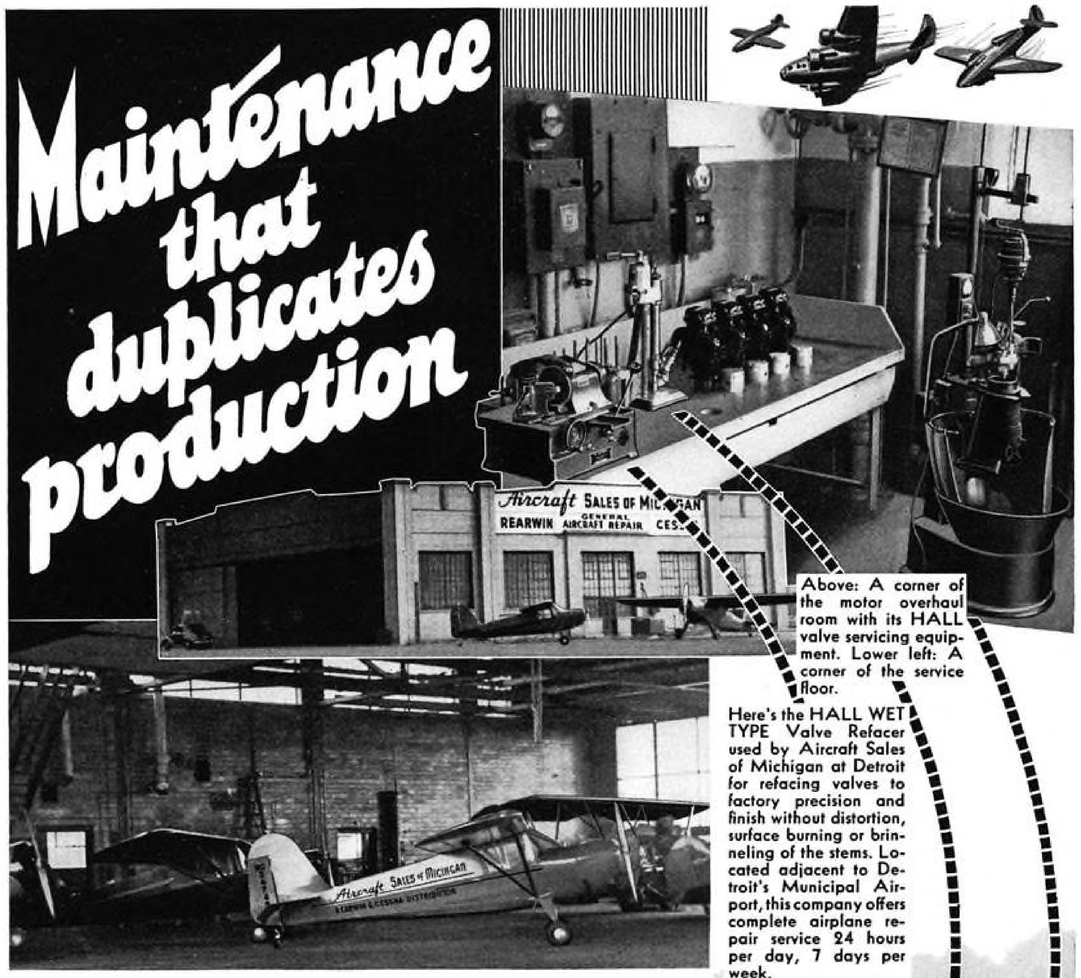

Above: A corner of the motor overhaul room with its HALL valve servicing equipment. Lower left: A corner of the service floor.

Here's the HALL WET TYPE Valve Refacer used by Aircraft Sales of Michigan at Detroit for refacing valves to factory precision and finish without distortion, surface burning or brinneling of the stems. Located adjacent to Detroit's Municipal Airport, this company offers complete airplane repair service 24 hours per day, 7 days per week.

This HALL Model EJA ECCENTRIC Valve Seat Grinder is used for restoring original precision and finish to valve seats located deep in in-line cylinders. Hundreds of these are in use in limited production and in the servicing of valve seats in Rolls-Royce, Armstrong-Siddley and Navy P-T boat motors.

The HALL AW WET TYPE ECCENTRIC Valve Seat Grinder is designed primarily for the "blind" grinding of valve seats in radial type motors to identical standards of precision and finish secured in production but is also used for grinding seats in Ranger, Menasco and other in-line motors.

Aero valve and valve seat maintenance demands the same close precision limits and glass-smooth finish achieved in original factory production if maximum engine performance and operating efficiency are to be realized.

Because HALL maintenance equipment is identical in principle and performance with HALL production equipment used by leading factories, it has been adopted by government air depots, transport companies, service shops, etc., in all parts of the world.

HALL equipment enables the ordinary maintenance mechanic to duplicate factory finish and precision with a substantial saving in time and cost. Write the factory today for complete information.

THE HALL MANUFACTURING CO.
1634 WOODLAND AVENUE • TOLEDO, OHIO, U.S.A.

HALL ECCENTRIC SEAT GRINDERS

READY, WILLING AND ABLE!

Chief among the hazards, seen and unseen, that beset the manufacturers of aircraft and tanks in their battle for maximum production, is that insidious, silent enemy—CORROSION, caused by moisture! And—corrosion must be overcome if our defenders are to perform as their designers intended. Every vital part must be protected.

Protek-Sorb Silica Gel has proved itself equal to the task of overcoming the hazard of corrosion! Vital engine parts, accessories, complete engines and even complete planes are being protected by Protek-Sorb during storage or shipment. Aircraft industry suppliers are finding new uses for Protek-Sorb daily. Used properly, Protek-Sorb gives the assurance that parts and finished products will reach destination in perfect condition, ready for instant use. There's no need to use costly, time-wasting, messy slushing compounds. Assembly lines move faster—administration headaches cease.

Let our engineering department show you how to defeat moisture and overcome the corrosion hazard in your plant with Protek-Sorb — the protective absorbent.

Protek-Sorb
SILICA GEL
A DAVCO PRODUCT

THE DAVISON CHEMICAL CORPORATION
Silica Gel Department • Baltimore, Md.

WHAT IS PROTEK-SORB? *Protek-Sorb is a protective absorbent that gives POSITIVE PROTECTION against rust, corrosion, mildew or bacterial action because it removes the cause of moisture damage—moisture within the shipping container. Protek-Sorb is chemically inert—gives off no odors or harmful compounds—it is safe to use with ANY product. Supplied in easy-to-handle cloth bags—ready for use according to requirements.*

Official Photograph U.S. Army Air Corps

"The delivery of the first AT-11, a twin engine advanced training airplane manufactured by the Beech Aircraft Corporation, Wichita, Kansas, has just been announced by the War Department. This low-wing all-metal monoplane will be used for the specialized training of bombardiers and gunners. It is equipped with flexible guns and bomb racks for the instruction of a crew of three or four men depending upon the instructional mission. The AT-11 has a wing span of approximately forty-seven feet, a length of thirty-five feet, retractable landing gear and twin tail. Power is delivered by two radial, nine cylinder, four-hundred-fifty horsepower Pratt and Whitney engines which operate two two-bladed propellers having a diameter of approximately eight feet."

{Official War Department description}

The AT-11 BEECHCRAFT thus joins a distinguished family of other BEECHCRAFTS in service with the Air Corps and the Navy. These others already giving faithful and efficient service are the AT-7 Navigation Trainer, the C-45A Transport, the F-2 high-altitude photo-mapping airplane, the JRB-1 utility observation and JRB-2 Transport (all twin-engine types), and the GB-2 single-engine biplane transport.

BEECH AIRCRAFT CORPORATION

Beechcraft

BEECH AIRPORT
WICHITA, KANSAS
U. S. A.

LET'S GO! U.S.A. · KEEP 'EM FLYING!

Simplicity

Longer life... less weight... volume production... are achieved through the basic simplicity of the Bendix hydraulic check valve which is being specified as standard equipment on numerous Air Corps and Navy airplanes.

The Bendix valve incorporates a Plastic Poppet* which "wears in" instead of wearing out. No inserted seats are used as the poppet seats directly in the valve body. The valve is chatter-free at all flows without the aid of dashpots.

Bendix check valves are available for all tube sizes from 1/4 to 1 inch with threaded ends to meet both Air Corps Specification 27993 and AND-10056.

**An exclusive Bendix Aviation, Ltd. development, U.S. Pats. applied for.*

BENDIX AVIATION, LTD.
Subsidiary of Bendix Aviation Corporation
NORTH HOLLYWOOD • CALIFORNIA

BENDIX AVIATION, LTD.

CHECK VALVE

DISCONNECT COUPLINGS · POWER BRAKE VALVES · CHECK VALVES · PRESSURE REGULATORS
HAND PUMPS · ACTUATING CYLINDERS · HYDRAULIC ELECTRIC SWITCHES · RESTRICTOR VALVES
SEQUENCE VALVES · HYDRAULIC SELECTOR VALVES · TUBE CLAMPS · CUSTOM BUILT RADIO

Country Facing Alarming Shortage Of Aircraft And Engine Mechanics

The United States has about 74,000 military planes on order for its own services and Great Britain, according to "American Aviation." Both countries are training pilots to fly these planes, but somewhere in the defense program the mechanics who must service and overhaul them have been overlooked.

At the present rate of training licensed airplane and engine mechanics, this country will face a shortage of hundreds of thousands of mechanics within the next two years. We will have the planes and the pilots but not the mechanics. Eight to ten ground men are needed for each plane, and inexperienced, untrained men are worse than useless. Airplanes can be built rapidly by mass production methods, but any sufficient number of licensed A and E Mechanics would take years to train.

A recent survey indicates that there are only 12,737 licensed civilian A and E Mechanics in the country; an increase of 24 per cent over last year. At the same time, the number of planes has increased 59 per cent and pilots 182 per cent.

Spartan School has plenty of evidence of the shortage of A and E graduates. Requests for them have come from airlines, factories, repair stations, and many C.A.A. operators. Our reply has been necessarily discouraging, as no qualified men were available. In fact, Spartan could use many more in its own organization. The training fleet now numbers 325 airplanes, more than double the number in operation a year ago.

Mechanically inclined young men should heed this call. Licensed A and E Mechanics will always be in demand in aviation.

YOUR OPPORTUNITY to DOUBLE or TRIPLE Your Life Income

CERTIFICATED Aircraft and Engine Mechanics are urgently needed to overhaul and maintain the thousands of airplanes now rolling off production lines. Few men are qualified to hold these positions; few A&E Mechanics are being trained for this work. Excellent rates of pay are the direct result. Why be content with an ordinary job in avation? SPARTAN A & E graduates now have their choice of positions. At September graduation SPARTAN had 60 requests for the services of 20 graduates.

SPARTAN
SCHOOL OF AERONAUTICS
DIVISION OF SPARTAN AIRCRAFT COMPANY

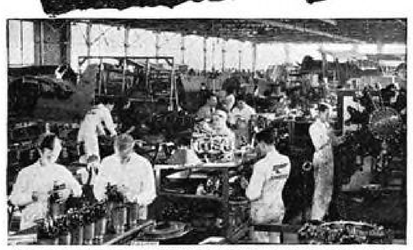

(Above) IN MAINTENANCE ENGINEERING BUILDING

(Below) OVERHAULING A SPARTAN EXECUTIVE

Come to SPARTAN for the most complete, practical and thorough Aircraft & Engine Mechanics training available. Let SPARTAN give you the opportunity to *double or triple your life income*...give you the specialized training that can lift you out of the $18 to $25-a-week class and put you in the $36 to $75-a-week class so as to earn $80,000 to $175,000 during your life.

At SPARTAN you get skilled personalized instruction plus outstanding shop practice. SPARTAN'S 100% Approved Repair Station has facilities for servicing 325 planes now used in Civil and Military flight instruction — plus 48 modern engines used for student instruction. Shops include: engine overhaul, airplane overhaul, wood shop, propeller shop, instrument, sheet metal, welding, parachute, engine testing, electrical, radio, paint and dope—laboratories: navigation, fuels and oils, hydraulics and deicing, instrument, meteorology, physics, metallurgy.

Remember, this Government Approved, industry-recognized school with *two million dollars worth of training facilities* offers you superior advantages for training in these other branches of aviation: Sheet Metal, Flight, Engineering, Radio, Instrument Mechanics, Engine Installation Mechanics, Final Assembly Mechanics, Meteorology. Mail the coupon now for catalog. Next semester starts January 5th.

Spartan School of Aeronautics—Captain Maxwell W. Balfour, Director
Address Dept. A 121 Tulsa, Oklahoma

Send me your new Catalog describing in detail the SPARTAN courses I have checked, also stating tuition and living expenses.

Name ..... Age .....
Address .....
City ..... State .....
Previous Education ..... (21)

CHECK COURSES YOU PREFER:

- ☐ Commercial Pilot
- ☐ Air Transport Pilot
- ☐ Commercial Flight Instructor
- ☐ Air Transport Engineering
- ☐ Aeronautical Engineering
- ☐ Aircraft or Engine Mechanic
- ☐ Aircraft Sheet Metal
- ☐ Engine Installation Mechanic
- ☐ Aircraft Assembly Mechanic
- ☐ Airline Service Mechanic
- ☐ Radio Maintenance and Operations
- ☐ Private Pilot Course
- ☐ Weather Forecasting
- ☐ Instrument Technician
- ☐ Women's Instrument Technician

Keep 'em Flying

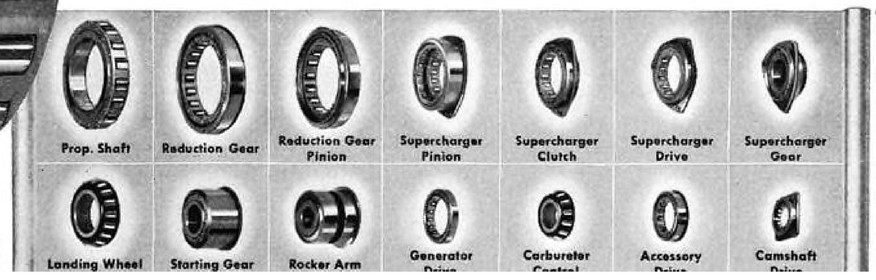

Propeller Shaft

BOWER ROLLER BEARING CO.

Ask for it...
An interesting full color, 4-page folder featuring Bower advantages to national defense

PREFERRED FOR PERFORMANCE
BY AMERICA'S AIR WAYS

UNITED AIR LINES
BRANIFF Airways
NORTHWEST AIRLINES INC.
PAA PAN AMERICAN AIRWAYS
EASTERN Air Lines
AMERICAN AIRLINES
The TRANSCONTINENTAL TWA Airline
CHICAGO AND SOUTHERN
DIXIE LINER SERVICE

With the Men who "keep 'em Flying" it's

Snap-on Tools for MAINTENANCE!

Every famous name in air-transportation depends on Snap-on tools to keep its priceless motors at their peak . . . its great sky-liners winging swiftly on schedule. At airports, in overhaul divisions, in flight engineers' compartments, wherever maintenance operations require speed with accuracy, Snap-on tools are the choice of men who know that in their workmanship lies the fate and future of aviation.

Snap-on tools are built to merit this trust . . . are noted for fine steel, for beautiful balance and finish, for easy handling, for the safe, sure way they speed the skill of the hands that use them . . . Investigate Snap-on tools for *your* requirements . . . over 3000 units from which to choose. See your Snap-on salesman, or write . . .

OVER 3000 HAND AND POWER TOOLS — FROM MIDGET WRENCHES TO HEAVY DUTY UNITS

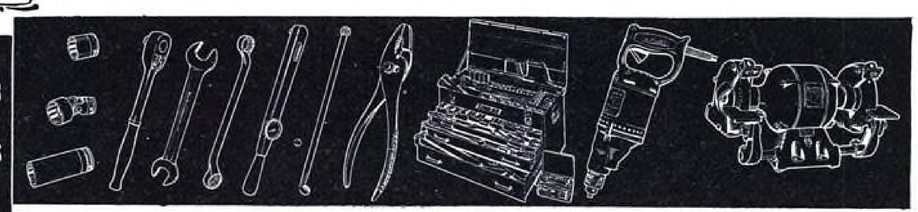

SNAP-ON TOOLS CORPORATION, 8020-L 28th Avenue, Kenosha, Wisconsin

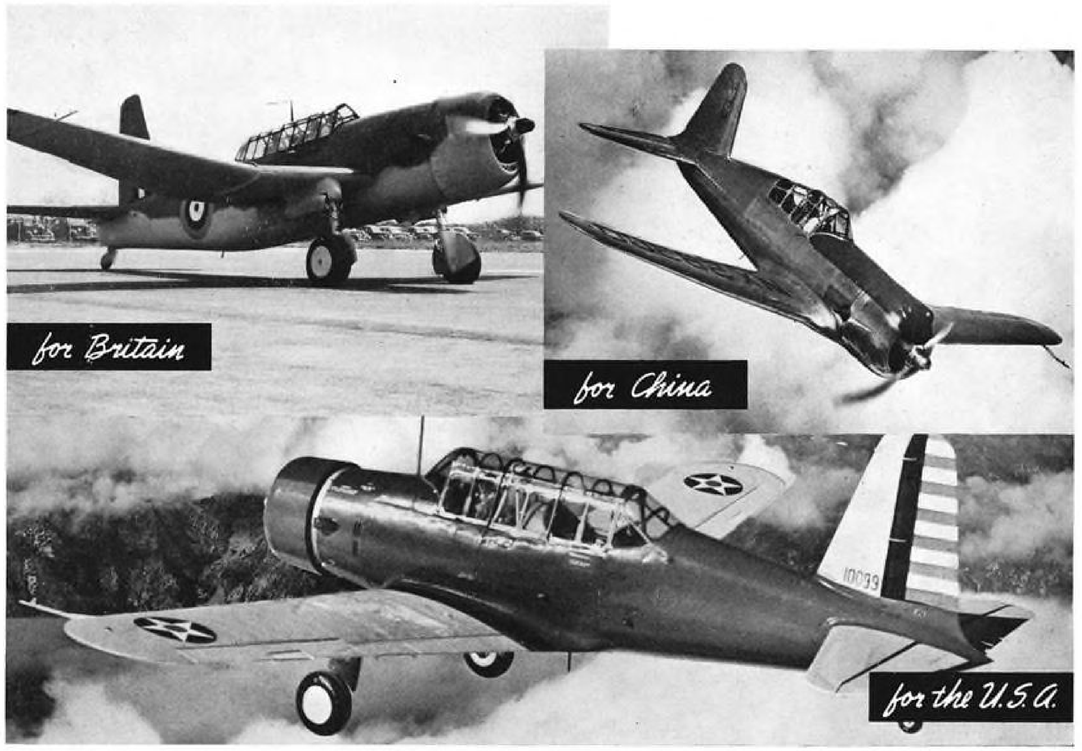

Where there is Fighting—there's a Vultee ★ ★



Vital unit in Democracy's Arsenal is Vultee Aircraft, Inc. Here are produced Dive Bombers for Britain; Pursuit Ships for China; Trainers, Attack Bombers, and others for the U.S.A. Vast experience has dictated high standards for each of the thousands of parts that are built into these aircraft. They must "stay on the job." Vultee records in maneuvers and actual combat bespeak the accuracy of each selection.

Belden Wire is used on Vultee planes.

Belden Aircraft WIRE

Starter, Lighting, and Instrument Cables √ √ √ SPARK PLUG WIRES

THE *Lockheed* LOG

LEADERSHIP

in pilot appeal!

TALK *Lockheed* WITH A U. S. ARMY PILOT

TALK *Lockheed* WITH AN R. A. F. PILOT

TALK *Lockheed* WITH AN AIRLINE PILOT

TALK *Lockheed* WITH ANY PILOT

WHO ELSE KNOWS AIRPLANES HALF SO WELL?

The men who actually fly Lockheeds are the real authorities! They know maneuverability...speed and stamina. They know design and construction and the things that make dependability. They know whether an airplane has what it *takes*...Talk with them...in the U.S. Army Air Corps...in the Royal Air Force...and on the airlines. You'll find a universal enthusiasm...a kind of "pilot appeal" that makes a Lockheed a leader, wherever it flies.

Printed in U.S.A.

LOOK TO LOCKHEED FOR LEADERSHIP

LOCKHEED AIRCRAFT CORPORATION • BURBANK, CALIFORNIA, U. S. A.

A WORLD OF SERVICE—FOR THE WORLD'S BEST CUSTOMERS!

ADEL *Design Simplicity* makes the Maintenance Man's world go round more smoothly. *Design Simplicity* plus *maximum standardization* provides *minimum maintenance.* Specify ADEL Equipment—*proven* by years of use on commercial and military aircraft operating under every conceivable service condition over all parts of the globe.

ADEL

PRECISION PRODUCTS CORP.
BURBANK, CALIFORNIA, U.S.A.

EASTERN SALES ENGINEER: J. HENRY REISNER, *HAGERSTOWN, MARYLAND*
CANADIAN SALES ENGINEER: D. A. THOMAS, *302 BAY STREET, TORONTO*

JOBS!...certainly young men can get them in the aviation industry today

BUT THIS IS NO TIME TO GO INTO AVIATION UNTRAINED

Prepare yourself for a top position. At Boeing School of Aeronautics you will acquire the fundamentals and specialized knowledge that aviation demands—training that will put you in line for rapid advancement when you start to work

If you could quiz Boeing Grads regarding their opinion of Boeing School training, they would tell you that it "paid off" at the very start. For example—"Yesterday was my *first* day on the job," writes a Boeing Grad. "However, it was *at once* apparent how good my training had been, since my supervisor *immediately* assigned me to quite important work and gave me a free hand."

This is as it should be. To quote T. Lee, Jr., Director of Boeing School of Aeronautics, "If, after graduation, a student should be unable to translate his training into service of value to himself and to the company that employs him, we would feel that our institution had failed in its fundamental purpose."

Boeing School of Aeronautics has no "general courses." The primary function of this school, a division of United Air Lines, has been, and will continue to be, the thorough training of a limited number of men each year for positions with the airlines and in the more highly specialized fields of aeronautical engineering. To accomplish this, Boeing School of Aeronautics offers courses covering every phase of aviation, using the most modern equipment.

Think seriously of what Boeing School offers before you take a mere job in aviation. Now, more than ever before, is the industry demanding *trained* men. If you think you possess the personal qualities essential to a successful career in aviation, and if you are willing to devote the time and effort to secure the necessary training, now is the time to fill in the coupon below and mail it!

Boeing School Grads Make Good in Top Positions

Since Boeing School of Aeronautics was established in 1929, its graduates have been placed in 52 companies where they have advanced to positions of responsibility as pilots, engineers, technicians, meteorologists, and in almost every department of airline operations. Today there is a constant demand for Boeing School Grads.

ENROLLMENT PERIODS: JANUARY, MARCH, JUNE, SEPTEMBER

8 CAREER COURSES One specially designed to fit your chosen field of aviation. Note the courses requiring only high school education:

Courses requiring High School only
- ☐ Airline Pilot and Engineering
- ☐ Airline Operations and Engineering
- ☐ Airline Mechanic and Operations

- ☐ Aeronautical Engineering
- ☐ Airline Mechanic
- ☐ Aircraft Sheet Metal
- ☐ Private Pilot
- ☐ Commercial Pilot

Advanced Courses
- ☐ Air Transport Engineering

- ☐ Airline Pilot Course
- ☐ Airline Technician
- ☐ Airline Meteorology
- ☐ Special Airline Pilot
- ☐ Instrument Rating

NOTE: Link trainer instruction available.

Boeing School of Aeronautics
1121, Hangar No. 5
Airport, Oakland, California.

GENTLEMEN: Please mail me—without charge—the Boeing School descriptive booklet containing complete information on the school and describing in detail the courses I have checked at the left.

Name .....
Street Address .....
City .....
State ..... *Age* .....
Previous Schooling .....

BOEING SCHOOL OF AERONAUTICS

BOEING SCHOOL OF AERONAUTICS EST. 1929 A DIVISION OF UNITED AIR LINES

Split-second *Decisions* rest soundly on *Pioneer* split-thousandth *Precision*

☆ Fast maneuvering aloft calls for fast thinking, and for unquestioning reliance upon the truth of instrument indications.

Flying attitude, direction, altitude, speed and engine output must never be matters of doubt, when a man has to think swiftly and soundly to keep on living.

This fact is the reason that Pioneer pays more for Precision than for any other attribute or part of any Pioneer Instrument.

Pilots in every sky of the world, approve of this policy whole-heartedly, as demonstrated by their preference for Pioneer Instruments.

LET'S GO! U.S.A. KEEP 'EM FLYING!

Pioneer Aircraft Instruments serve almost every function of flight, navigation and mechanical control. The list is long, and is constantly being augmented by new developments, designed to meet the ever-growing needs of commercial and combat flying.

PIONEER INSTRUMENT

DIVISION OF BENDIX AVIATION CORPORATION

BENDIX, NEW JERSEY, U. S. A.

AVIATION

Established 1916

OLDEST AMERICAN AERONAUTICAL MAGAZINE

CONTENTS REGULAR EDITION DECEMBER 1941

ANNUAL MAINTENANCE ISSUE

Flashes 43
Side Slips 47
Air Policy and Defense *By Edward Warner* 48
Quick Turn-Around *By Edward W. McVitty* 50
Northwest Airlines Wins Maintenance Award 52
Air Corps Learned Plenty on Maneuvers *By Garrett Underhill* 54
The War and Aircraft Maintenance *By Reagan C. Stunkel* 58
Keep 'Em Flying—Abroad *By Arthur L. Fornoff* 60
Maintenance on the Move 62
Men on the Ground at Hamilton Field 64
Corpus Christi 66
British Service Teams Study American Aircraft 70
Light Plane Maintenance *By Donald C. Dobbyn* 73
Servicing Canadian Kinners *By Charles Sander* 75
More Flying Per Day for Airline Planes 76
Mass Maintenance Methods *By Charles "Chief" Kidder* 80

FLYING EQUIPMENT

Northrop "All-Wing" Airplane *By John K. Northrop* .. 82
Britain's New "Heavies" 104
Morrow Plywood Trainer 107
Curtiss Twin-Engined Trainer 110
Aeronca Defender 110
AVIATION Radio *By Craig Walsh* 124

Aviation's Ever-Changing Trends *By Selig Altschul* ... 126
Buyers Log Book 130

ENGINEERING AND PRODUCTION ARTICLES

Teamwork for Production *By Robert Monroe* 86
Laboratory Control for Ranger Engines *By C. B. F. Macauley* 108
S.A.E. Engineers Review Year of Progress 113
Air Filters for Airplane Engine Protection *By Wm. K. Gregory* 115
Procedure Control for Aircraft Welding *By A. K. Seemann* 116
AVIATION'S Sketchbook of Design Detail 120
The Aviation News 139

National Aviation 140
Washington Windsock 141
Defense 142
Aviation Manufacturing 147
Aviation Abroad 150
Aviation People 153
Aviation Engineering 155
Transport Aviation 156
Finance ..... 159 *By Raymond Hoadley*
Operators Corner 162

The New Books 164

LET'S GO! U.S.A. KEEP 'EM FLYING!
UNCLE SAM NEEDS PILOTS BE A U. S. ARMY FLYING CADET

LESLIE E. NEVILLE, *Editor*
CARL NORCROSS, *Managing Editor*
CHARLES F. McREYNOLDS, *Pacific Coast Editor*
C. B. F. MACAULEY, *Washington Editor*
CRAIG WALSH, *Radio Editor*
GEORGE W. PFEIL, *Manager*
J. PEARCE AUWERTER, *Technical Editor On leave of absence*
BLAINE STUBBLEFIELD, *News Editor*
RANDOLPH HAWTHORNE, *Editorial Assistant*
PAUL WOOTON, *Chief of Washington Bureau*

McGRAW-HILL PUBLISHING COMPANY, INC.
JAMES H. McGRAW, Founder and Honorary Chairman

Editorial and Executive Offices: 330 West 42nd Street, New York, N. Y. *Publication Offices:* 99-129 North Broadway, Albany, N. Y.

Chicago, 520 North Michigan Ave. San Francisco, 68 Post Street
Los Angeles, 9121 Balton Ave. Aldwych, London, W. C. 2
Washington; Philadelphia; Cleveland; Detroit;
St. Louis; Boston; Atlanta, Ga.

JAMES H. McGRAW, JR., *President*
MASON BRITTON, *Vice-Chairman*
D. C. McGRAW, *Secretary*
HOWARD EHRLICH, *Executive Vice-President*
B. R. PUTNAM, *Treasurer*
J. E. BLACKBURN, JR., *Director of Circulation*

Published monthly, price 50c a copy, 50c in Canada. Allow at least 10 days for change of address. All communications about subscriptions should be addressed to Director of Circulation, 330 West 42nd Street, New York. Subscription rates—United States, Mexico, and Central American Countries, $3.00 a year, $4.00 for two years, $5.00 for three years. Canada, $3.50 for one year, $5.00 for two years, $6.00 for three years, payable in Canadian currency at par. Great Britain and British Possessions 20 shillings per year, 60 shillings for three years. All other countries, $5.00 a year, $10.00 for three years. Entered as second class matter, September 3, 1936, at the Post Office, Albany, New York, under the Act of March 3, 1879. Volume 40, Number 12. Printed in U. S. A. Cable address: "McGrawhill New York." Member of A.B.C.

Copyright 1941 by McGraw-Hill Publishing Company, Inc., 330 West 42nd Street, New York, N. Y. The contents of this issue are copyrighted and may not be reproduced without the permission of the copyright owner. The following publications are combined with AVIATION: AERONAUTICAL ENGINEERING, AIRCRAFT JOURNAL and THE AVIATION NEWS. All rights to above names are reserved by the McGraw-Hill Publishing Co.

Aviation is indexed in Guide to Periodical Literature and in Industrial Arts Index.

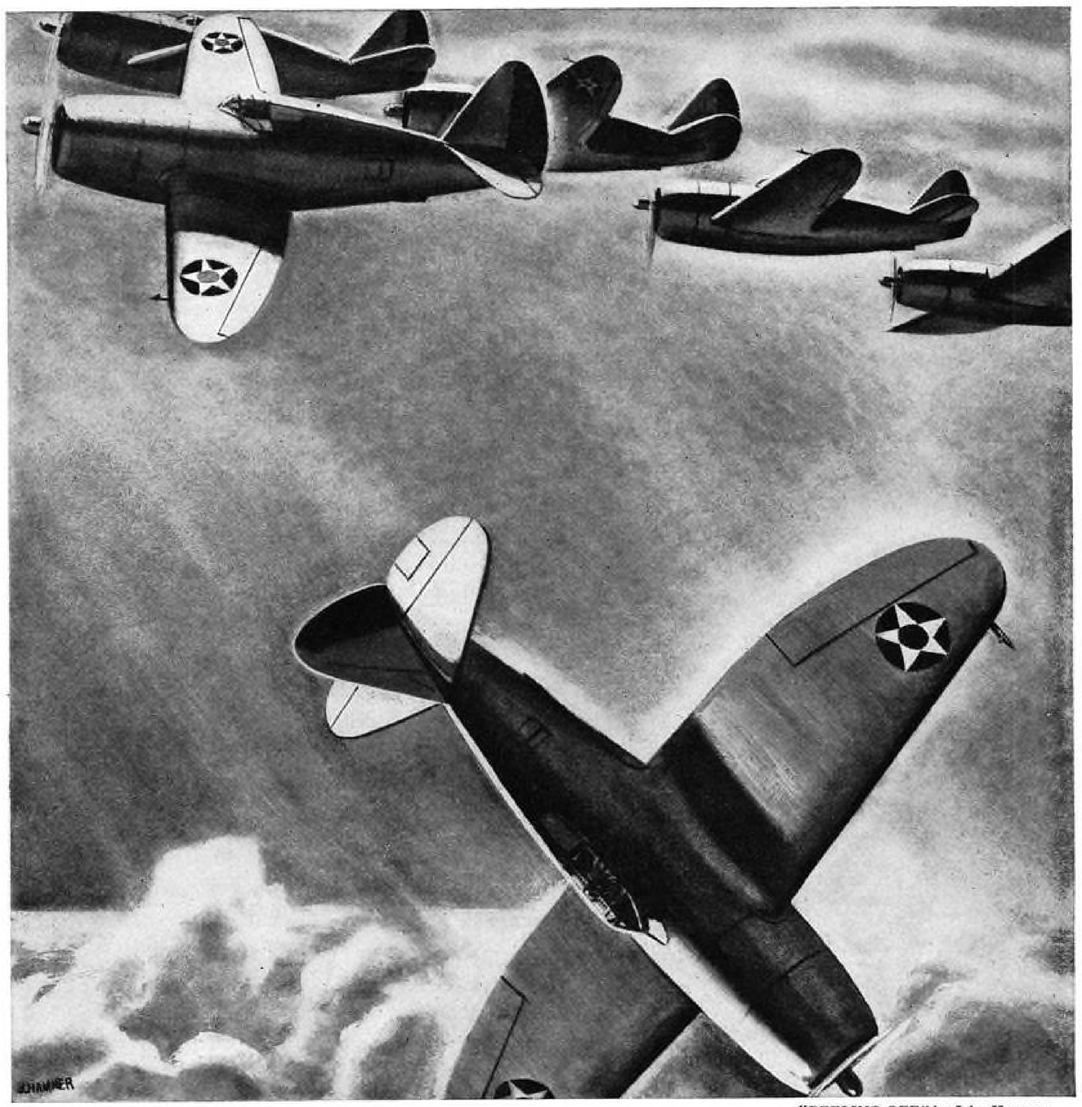

"PEELING OFF" by John Hammer

FIGHTING ACE FOR '42 . . . Republic Aviation, holding to the single objective of developing the ultimate in high-altitude interceptor aircraft for the Army Air Forces, records its newest and most noteworthy achievement—*the P-47 Thunderbolt,* a super-powered plane for a super-fighting job. Republic Aviation Corp., Farmingdale, N. Y.

REPUBLIC AVIATION

REPUBLIC AVIATION

FLASHES

picked up along the editorial airways

Back to Starvation?

» THE AIRCRAFT MANUFACTURERS have risen to the call of their country and piled up a miraculous score of deliveries for 1941. Military aircraft production has risen from 799 to 2000 per month and is still on the way up. Total for the year is more than a three-fold increase over that of 1940. We have reached and passed the halfway point in the expansion to a productive capacity of 50,000 planes per year. Our acceleration in production has exceeded that of Germany or England even during their forced-draft expansion before the war. For comparative figures see "Air Defense Progress" by T. P. Wright, AVIATION, Nov., 1941.

Some manufacturers have huge backlogs of orders on the books, and the total backlog of the industry is steadily rising. The danger of profiteering has been adequately controlled by an excess profits tax law, which is so effective that it has been highly successful in discouraging investors from purchasing the securities of aviation manufacturing companies. Anyone who analyzes and is able to understand our excess profits law will think several times before he places his money in aviation enterprises.

Now, on top of all this, come a couple of Congressmen with new proposals to limit profits. One of them is our old friend, Carl Vinson of Georgia, whose legislative creations of the thirties were largely responsible for the starvation period of aircraft procurement and which drove the industry to sell its products and licensing rights to foreign countries, including Germany, in order to remain alive. There were many long years when export business alone unhampered by profit limitation kept plants open and manufacturing talent comparatively intact. The plain truth is that too much of our development expense was paid for by foreign nations. And such an arrangement could not be expected to last indefinitely.

» A SEVEN PERCENT PROFIT LIMIT sounds generous to the unsuspecting citizen who cannot get two percent from his local savings bank. But when you deduct state and local taxes and a few other things, the seven percent actually shrinks up to something less than you could get from the local savings bank.

Now maybe two percent is a fair net return on a large volume of business in some industries. But it certainly is not adequate to provide the vast engineering expenses that must go into the development of tomorrow's airplanes, engines, and accessories, and it is engineering that will be that deciding factor in this and every other war. Have our legislators, in their blindness, forgotten the superb engineering and development organization against which we are competing in the present war effort? Or is it that they don't know the difference between research and development.

» WHILE CONGRESS WAS STARVING OUR MANUFACTURERS and discouraging development in the middle thirties it was also starving our government research organizations. Hardly a year passed but what the N.A.C.A. was forced to fight for its paltry appropriations to maintain a research staff only a fraction of the size of Germany's. Wright Field, too, was eternally plagued by lack of funds. And yet these organizations performed the impossible by making many important contributions to the aeronautical sciences during these lean years.

When war threatened, Congress became a little more generous but even now it is necessary to resort to deficiency appropriations to do the job properly. And our leaders in research are going ahead and doing their job in a highly satisfactory way, under many varieties of handicaps. One of the most serious of these, incidentally, is the necessity under the law of letting construction contracts on the basis of competitive bidding instead of negotiation or cost-plus. And it is very difficult to find contractors willing to go ahead on the old basis when there is plenty of cost-plus business available.

But research, although highly important, is only one part of the job. The other is that part called development, and in this place the practical engineer takes the new discoveries of the research laboratories and moulds them into a better finished product. This is the function of the manufacturer's engineering staff, spurred on by the ever increasing demands of the military and naval procurement organizations. It is from this phase of engineering that the

BEVO HOWARD, whose stunting has thrilled Air Maneuvers crowds, is president of both the Hawthorne School of Aeronautics at Orangeburg, S.C. and the Hawthorne Flying Service at Charleston and Columbia, S. C. All 3 handle Texaco Aviation Products exclusively.

"MEET ME AT MIAMI" might well be the rallying cry among birdmen and other aviation enthusiasts for the 14th Annual All-American Air Maneuvers at Miami, Florida, January 9-11. Everybody goes, everybody thrills.

Should you fly your own ship, principal airports en route will service it with the same *Texaco Aviation Gasoline* and *Texaco Aircraft Engine Oil* used by the airlines. In fact:

More revenue airline miles in the U. S. are flown with Texaco than with any other brand.

The outstanding performance that has made Texaco FIRST with the airlines has made it FIRST in the fields listed in the panel.

These Texaco users enjoy many benefits that can also be yours. A Texaco Aviation Engineer will gladly cooperate in the selection of Texaco Aviation Products, available at leading airports in the 48 States.

Phone the nearest Texaco distributing plant, or write:

The Texas Company, *Aviation Division,* 135 East 42nd Street, New York, N. Y.

THEY PREFER TEXACO

★ More revenue airline miles in the U. S. are flown with Texaco than with any other brand.

★ More buses, more bus lines and more bus-miles are lubricated with Texaco than with any other brand.

★ More stationary Diesel horsepower in the U. S. is lubricated with Texaco than with any other brand.

★ More Diesel horsepower on streamlined trains in the U.S. is lubricated with Texaco than with all other brands combined.

★ More locomotives and cars in the U. S. are lubricated with Texaco than with any other brand.

FOR YOUR ENJOYMENT • TWO GREAT RADIO PROGRAMS

FRED ALLEN every Wednesday night. See your local newspaper for time and station.

METROPOLITAN OPERA. Complete broadcasts of great operas every Saturday. See your local newspaper for time and station.

TEXACO Lubricants and Fuels
FOR THE AVIATION INDUSTRY

RETURN METAL DRUMS PROMPTLY . . . thus helping to make present supply meet industry's needs and releasing metal for National Defense.

continuous flow of new and improved aviation equipment will come. If we cut off experimental development we cannot compete with the aircraft designers of Europe. And it is for this experimental work that our manufacturers must have a reasonable margin of profit.

» THE AIRCRAFT INDUSTRY has struggled to maintain its experimental development through the lean years, and is doing so now when production of existing designs is the primary necessity. We must oppose at all costs, any attempts, under the guise of profit limitation legislation or under any other guise, to stifle the experimental development work which will constitute the deciding factor in winning the war.

» MAINTENANCE AND SERVICING of aircraft, engines and equipment has always been a matter of great importance to the operators of airplanes, both commercial and military. It is still more important in time of war. And when these planes are operating in strange countries, thousands of miles from the factories in which they are built, much of their successful use depends upon the servicing organizations and spare parts supplies at their bases of operation. In the present war it is almost invariably true that the manufacturers who provided the most competent and adequate servicing organizations abroad, were able to gain the most rapid acceptance of their products.

For this reason a substantial part of this Annual Maintenance Number of AVIATION is devoted to servicing problems in time of war. Some of the problems encountered in transplanting our equipment to British bases of operations are discussed by AVIATION's former editor, Vice Chairman Edward Warner of the C.A.B., who performed a valuable service in his recent work in England with W. Averell Harriman. Another article discusses the fundamentals successfully followed in organizing a servicing group in England, by Arthur Fornoff of Bell, who went over with the first consignment of P-39s and did much to help the British understand the ship.

» WE HAVE NOT FORGOTTEN maintenance problems in the United States and we have been able to present a number of articles on the work of the military services at home, the airlines, and the fixed base operators.

Nor have we forgotten the annual airline maintenance awards presented by AVIATION to the airlines performing the most outstanding jobs of the year. For a long time we have felt that we were penalizing the small lines whose limited resources forced them to substitute ingenuity for cash in doing their jobs. Accordingly, we decided to make two awards and set the dividing line between the two airline groups at 100,000,000 revenue passenger-miles of traffic per year. Our heartiest congratulations to the winners,—Pan American in the large airline group, Northwest in the other classification (for details, see p. 50 and 52).

» AMONG THE MOST IMPORTANT FACTORS considered in determining the winners of these awards was good housekeeping and safeguards against fire and shop accidents. Frankly, our surveys showed that there is not enough attention paid to these important elements of successful maintenance operations by a great many of the airlines. This would be bad enough in normal times, but it is much worse now when the experience level of all workers is falling, due to thinning out of personnel for industrial expansion and the obligations of compulsory military service. It behooves all maintenance executives to overhaul their housekeeping methods, fire prevention facilities, and employee safeguards, and to keep accurate records of shop accidents so that they can be studied and means found to reduce their number and degree of seriousness. Tangible rewards will come in the form of lower insurance rates.

» ANOTHER GRAVE DANGER is that of sabotage and this may take many different forms. Workers must be checked closely, new arrivals investigated carefully, and shops must be guarded more adequately than they were in the wide open days of peace. It is not fantastic to foresee the desire of some foreign agent to liquidate some important airline passenger or to inaugurate a mysterious epidemic of crashes as part of a war of nerves.

SAVE TIME BY AIR

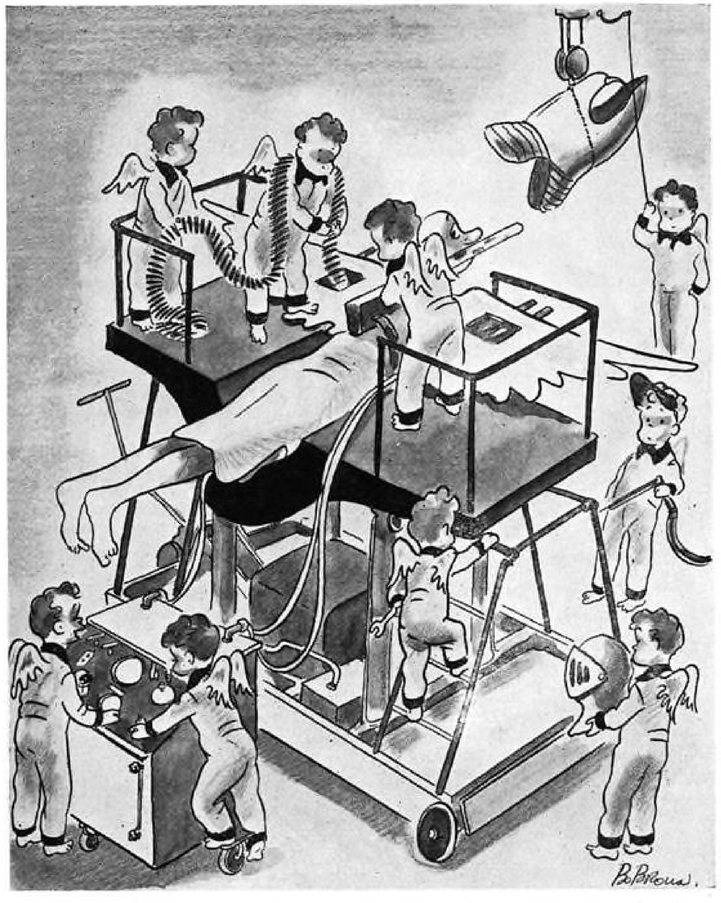

Maguire's maintenance mechanics are fixing him up for combat service abroad.

The Machine...the Part...and the Product

AT LEFT: *Massive fixture for precision heat treatment of shock strut tubes.*

BELOW: *Oil quenching of tubes controlled precisely, avoiding distortion.*

Heat-Treated
to meet stresses safely

STRUTS require extremely precise heat treatment. The illustrations above show a portion of the special apparatus, and two steps in the process. All tubes are heat-treated vertically, the special fixtures being designed to minimize distortion of any sort.

Notice the electrical temperature recording apparatus and the size of the fixture required in the heat-treating bath.

The lower photograph shows the same fixture with the tubes attached, being lowered into the oil quenching bath.

Production precautions such as these, superimposed upon basic design which is the result of a great deal of experience and research, provide accurately predictable performance in Bendix Pneudraulic Shock Struts.

BENDIX PRODUCTS DIVISION
OF BENDIX AVIATION CORPORATION
South Bend, Indiana

Bendix LANDING-GEAR EQUIPMENT

AIRPLANE WHEELS AND BRAKES • PNEUDRAULIC SHOCK STRUTS • TAIL KNUCKLE ASSEMBLIES • PILOT SEATS

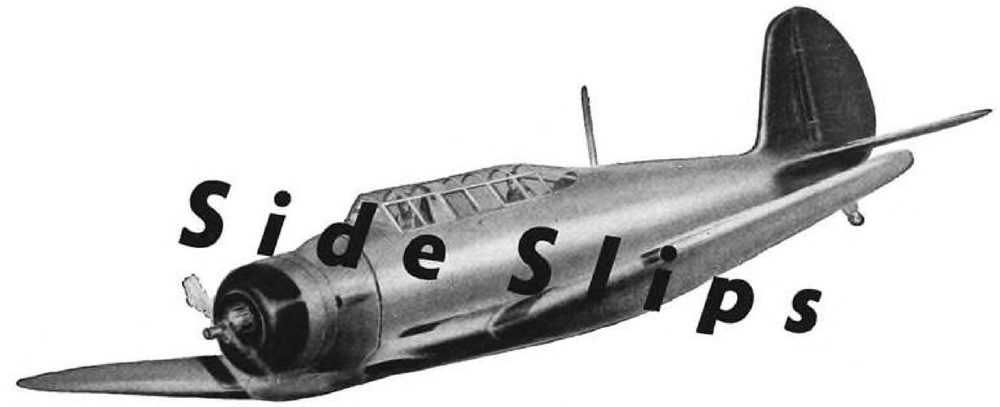

Side Slips

» MONTHS AGO we noticed an Air Force regulation which said that parachutes are automatically rejected at the end of seven years. Seemed reasonable enough at the time, but later on we fell to wondering what became of them after that. Goaded on by curiosity we finally called up an officer friend who knows all about such things, and he gave us the works.

At the end of seven years—each 'chute has a sort of log—the silk life saver is taken out of personnel service. If it's still reasonably sound, as it usually is, it is assigned to duty as a cargo 'chute and is dropped with supplies, weapons, tools and so on for the "paratroops."

But if it shows certain defects, it's "surveyed" out of service, and turned over to somebody around the post who wants to make it up into white scarfs

for the flight personnel. That is why you often see pilots, in real life and in the movies, wearing white scarfs.

Not *all* of it goes into scarfs, however. You can have one guess. That's right. It ends up as dainties for the womenfolk attached to the post's pay-roll, or attached to a husband or a swain who is. And there's still more to the story. It's confidential and don't repeat it, but manufacturers often send bolts of silk to the Air Forces for experimental and testing purposes; it's hardly ever all used, that way; and what's left goes where we just told you.

» EL MONTE IS SPANISH, if you couldn't guess, and it means "the willows." It's a place in California, and it's at the end of the Santa Fe Trail, and the new Western plant of Littlefuse, Incorporated, of Chicago, is located there. Littlefuse manufactures small electrical fuses and fuse mountings for instruments, aircraft, radio, etc. The company expanded in California because of the vast increase in airplane production on those sun-kist slopes.

That's your scene, and here's what's going on. The company takes a deep interest in the welfare of its personnel and has gone far beyond the usual along this line. "Music," says a company news release, "selected by the employees is a daily factor of the enjoyment. Instead of a clattering gong at 8 a.m. a time switch throws on an automatic phonograph and a selection of good music goes through the amplifiers, to every part of the factory. Music goes on again at the beginning and end of the lunch hour. At the "fatigue point" in the middle of the afternoon, there is a rest period. Cool fruit drinks and cookies are served in summer" . . . fruit drinks and cookies! Boy, that's taking the hell out of war.

» "I'D LIKE TO GET THIS PASS RENEWED," said a middle-aged civilian, stepping up to the personnel officer at Mather Field and handing him a yellowed card."

Amused, the officer said, "You've been AWOL for twenty-three years."

The pass was dated August 12, 1918 and it read: "This will entitle Ray C. Flory, Squadron "A" Air Service, N.A., to be absent from Mather Field at all times his presence is not required by his duties on the post."

Mr. Flory was a sergeant at Mather in 1918, an aerial gunnery instructor. Upon being discharged, he kept the card as a souvenir. He is now connected with a Sacramento firm that does business with the post. He needed a pass, so he had his little joke on time. Keep it another twenty-three years, Mr. Flory, and maybe you can do it again.

» HERE'S WHAT A RUNAWAY BARRAGE BALLOON DID before it was taken into custody 36 hours later, according to the Associated Press man at Camp Davis, N. C. After breaking away from its crew there, with 2,000 feet of steel cable trailing, it hooked onto and carried away a smoke house full of hams and a pig pen containing a mamma pig and a litter of little ones; shorted a high



tension line and blacked out Camp Davis; shorted power lines 200 miles farther on at Norfolk, Va., stopping a water pumping station which caused a "water hammer" in the pipes which busted a main line; went on and blacked out five more towns in North Carolina; still on, and pulled down a power line, putting seven more towns in the dark for an hour; caught a clothes line near Swansboro and carried off nearly a week's washing.

» "WE CAME IN TO DISCUSS AIR SERVICE TO THE BAHAMAS FOR THE TOURIST SEASON," said the Duke of Windsor, commenting on a visit he paid to the Civil Aeronautics Board in Washington. "There is a great need for air service to the Bahamas to keep the tourist trade going in winter."

For twenty years, man and boy, we've promoted tourist trade ourself, and on the airlines too, just like the ex-king does. Yep, that's democracy, all right. Right now, we'd like to promote a trip for ourself to the warm Bahamas!

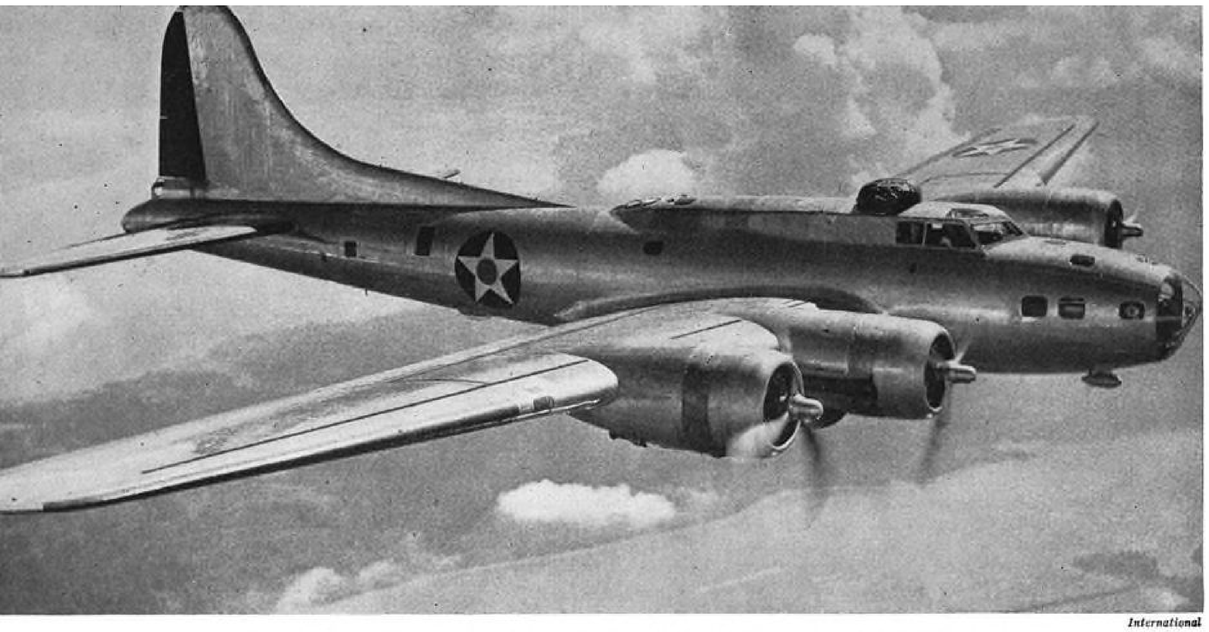

International

With power-operated turrets and the famed turbo-supercharger, the Boeing B-17-E is being counted on by England to do much of the high altitude bombing over Germany this winter.

Air Policy and Defense*

Highlights on some of the problems associated with the operation of American aircraft in warfare

By Edward Warner

Vice-Chairman, Civil Aeronautics Board, lately Technical Assistant to W. Averell Harriman on British Mission.

THE alluring possibilities that air power presented to the aggressor had a large share in starting the war; air power now has a large share in determining its outcome. The considerations that determine the effectiveness of air power's use have become vital to every living human being.

Being largely a war of air power, this is largely a war of air material. The material problem is of particular interest to Americans, for it is with material that we are currently taking part in the war in the air. Thousands of American airplanes have been shipped to the British forces. Tens of thousands of others will join them, in a mounting tide until the final victory in which they will have greatly shared has been won.

The performance of American military aircraft, and the service they have given in England and the welcome that they have found there, have been the subjects of a great deal of recent discussion. Questions of aircraft design have acquired a popular interest that they never had before, and they have become the subject of hot popular controversy. Extreme and spectacular statements have received wide circulation. What are the facts?

The basic facts are those that relate to the general quality of the aircraft, and their fitness for specialized military service. Contrary to frequent allegations of national self-exaltation or of national self-depreciation, there is neither general and continuing virtue, nor general and continuing defect, in American aircraft, nor in British, nor in German. Research goes on in all the major nations. Aeronautical engineering follows the same general methods, uses much the same data, and is subject to the same physical laws in all. In all these countries, men of great ability have applied their talents to the design of aircraft and their engines and auxiliaries, and to the improvement of the methods of producing the equipment. There have been periods when the arts of aeronautical engineering have been allowed to lapse into the doldrums in one country or another, with a general inferiority of the national product resulting for the time being; *but there has been no such period in the last five years for any of the countries that I mentioned.* I think it can be honestly claimed that American research and invention have led the way in introducing more important new features into aircraft design in recent years than have those of any other country; and I want to emphasize that, because the charge is so often and so inaccurately made that the organization of American aeronautics has been marked by suspicion and hostility towards innovation. I repeat that not even fragmentary support for any such charge can be drawn from the actual record. I would not venture, however, to extend that claim into a claim of any general and inherent superiority for the American product. Still less could any general inferiority be truthfully admitted.

** Excerpts from an address before Foreign Policy Association Forum on October 25, 1941.*

The sudden demand of the American public for information on our aircraft participating in the present war has resulted in the rise of innumerable pseudo experts who have poured out misinformation in alarming volume. Scarcely a day passes in which we do not receive several letters from responsible citizens deeply concerned lest there be some truth in the rantings of these self-styled authorities about the quality of our aeronautical material and the ability of our military leaders. It is therefore with great satisfaction that we are privileged to present the views of one who has made aviation his lifework and has made important contributions to the progress of aviation for more than a quarter of a century.

A former editor of AVIATION, the author needs no introduction to our readers. He has been in the forefront of aeronautical progress in peace and in war and has made many contributions to aeronautical engineering, design, air transport operation, and other branches of aeronautics. During his recent stay in England, where he served as technical assistant to W. Averell Harriman, he had occasion to work at close range on some of the vexing problems associated with the transplanting of American aircraft to foreign fields of operation.

These excerpts, from an address delivered to a recent forum on the general problems of defense, are intended for a non-technical audience and only a few of the many factors in the problem are here discussed. No attempt has been made, in the limited space available, to present a complete treatment of the essentials of the relation of American to European aeronautical engineering. It is our hope, however, that we may be able to offer in future issues, more specialized discussions of the several phases of this subject by the author.

If there is no universal superiority of one nation over another, however, there are many instances of the application of particular efforts, in one nation or another, to the solution of a particular problem on the development of a particular type. A few of the more conspicuous instances of that sort may be mentioned,—instances in which we have followed one line of development, while the British or perhaps all of Europe have followed another, with the result that *for certain special purposes* our aircraft do possess special advantages, while in other respects they work under special handicaps.

The first such instance is that of the heavy bomber. Many countries—Germany and Russia among others in recent years,—have at some time experimented with aircraft of giant size. In most European countries such trials have been a passing fancy, and a dominant consideration in determining policy on the size of the aircraft to be built in quantities has been a desire not to put too many eggs into one basket, but rather to secure a larger number of comparatively small units.

The British had been first to use four-engined airplanes for commercial purposes, and most persistent in developing their air transportation around very large aircraft; but to the four-engined bomber, although they continued development work and now have two excellent types in regular service, they gave a comparatively secondary place. In this country, on the other hand, for at least five years the directive policy of the Air Corps has viewed the large bomber, in the form colloquially known as the "flying fortress," with unvarying favor, and has given it a consistently high priority in procurement planning.

The heavy bomber is now recognized to have a number of special advantages for the present type of operations. Among the most important are its greater relative bomb-carrying capacity over long ranges, the lighter bombers being essentially short-range types; its ability to carry individual bombs of very large size, for attacking concrete buildings and other stoutly resistant structures; and its reduced personnel requirement, as compared with the two or three light bombers that would be required to carry the same total military load as one heavy one. Even the Germans, who have been persistently faithful to the light bomber for overland raiding, have turned to the development of larger types for the long-range operations of the campaign over the Atlantic. The high development of the bomber of 40,000 lb. weight or more in the years since 1935 constitutes one of the greatest of America's special contributions to the preparation of victory.

Another interesting point for illustration, and one that has been the occasion of some intensely acrimonious public discussion by aeronautical writers, concerns the power-plant. Both America and Britain build both air-cooled and liquid-cooled engines; but the concentration of effort upon the air-cooled types has been more intense in America than in Europe. There has been more hope in America that air-cooled engines could be made to serve all purposes, and the American air-cooled power-plants have made a world-wide reputation; but the British have built many more liquid-cooled engines than we have, and they have advanced more rapidly in increasing the power of the individual engine toward the present maximum of some 2,000 hp. Since most high-performance fighting aircraft are designed around liquid-cooled engines, our less intensive activity on that type of engine has imposed limitations on fighter development. Liquid-cooled power-plants are now in production here, and the development of new models of higher power is being pressed forward with all possible vigor; but we lack the British advantage of continuous development and large-scale application over the past decade.

The last point that I select for mention is that of the design of aircraft engines for maximum performance at very high altitudes. There are two general ways of making an aircraft engine maintain its full power in the region of rarefied atmosphere. Dependence may be placed entirely upon a supercharger built into the engine itself; or there may be a supplementary provision of a supercharger attached to the engine as an accessory, and not mechanically connected to it, but driven by the exhaust gas. European development has concentrated on the first method; America has given much attention to the second. The auxiliary type of supercharger has been the subject of study and occasional experiment in England, in Germany, and in France, but only in America has

(*Turn to page 186*)

Edward Warner

Quick Turn-Around

Pan American Airways has maintenance bases at Miami, Rio, Brownsville, San Francisco, Seattle, and New York—plus new shops being set up in Africa. Top-rank maintenance can be found at any of these places. Aviation's Maintenance Award is presented to all of the 2,500 mechanics and supervisors along these far-flung routes. Each shop in its turn has had to do its own pioneering. The following account of maintenance methods being used on the North Atlantic service is typical of the originality and skill being used on all Pan American routes. It concludes a series of three articles on trans-oceanic operations.

By Edward W. McVitty

Division Engineer, Atlantic Division Pan American Airways System

WHEN transoceanic flying boats of the Boeing 314 type, were first placed in operation four years ago, an average flying time of 4½ to 5 hours a day on an airplane was considered good. On the transatlantic service we are now approaching the neighborhood of nine hours daily on this type of airplane.

With the addition of the recently named Capetown Clipper to the Atlantic fleet we now have four airplanes in this service, the same number with which we started operation in 1939. In that year we were averaging 18 flying hours per day on the fleet, about half what we are doing now. This means that four airplanes in 1941 are performing work which is the equivalent of that which eight similar airplanes could perform in 1939.

Explaining the situation in a different way, and viewing it from the economic standpoint we had a fleet of airplanes in 1939 which cost $3,000,000. The work being performed right now is similar to that of a $6,000,000 fleet of aircraft. When such a situation is viewed with this angle in mind it can be easily understood that substantial investment can be made in such necessities as shop equipment, inspection facilities, etc., to obtain more intense performance and still leave the operator, financially speaking, well ahead of where he started. To obtain the above, Pan American Airways had to reduce the maintenance time on these 84,000 pound Clippers from six days to two. In one-third the time that it formerly took, the company is performing as many items of maintenance on the Clipper between round trips across the 3,890 mile route between New York and Lisbon as when service first began. The number of items in such an operation may amount to as many as 1500.

In common with all airlines, Pan American Airways has had a drastic need to show such improvement. The war and the defense program, which have tremendously increased the demand for all types of air transport service, have simultaneously removed the possibility of meeting that demand through an increase of flying equipment. The only solution to the situation which has arisen is to use the aircraft on hand for more flying in any given period. That, in turn, means doing more maintenance work in any such given period upon aircraft available for maintenance work during such reduced periods.

The only difference between the problems to be met by the domestic airlines and the burden placed upon the Pan American Airways maintenance base at LaGuardia Field by the outbreak of the European war, is that the impact of increased traffic demands fell upon the transatlantic airline at least a year earlier than it began to have a controlling effect upon domestic operation. Perhaps, therefore, it would be worth while to go into the means by which Pan American Airways has cut its maintenance procedure time so greatly.

(*Turn to page 178*)

This year AVIATION is presenting two Maintenance Awards —one to an airline operating over 100,000,000 revenue passenger miles per year and one to an airline operating less than that amount. Awards were presented at the maintenance meeting of the Air Transport Association in Cleveland on November 11.

Winner of the Award for airlines operating over 100,000,000 revenue passenger miles was Pan American Airways. Since its inception, Pan American Airways has been a pioneer, not only of new routes but of new maintenance methods as well. This airline has inaugurated more new types of airplanes than any other line. It is the chief operator in the entire world of large commercial flying boats. In the maintenance of Sikorskys, Martins and Boeings its engineers and mechanics have had to chart new courses, developing their methods by the sweat of their brows. A long series of landplanes has also passed through Pan American shops—Fords, Fokkers, Douglases, Boeing Stratoclippers, Lockheeds —to name only a few.

Pan American is more than an airline—it is a vast system of airlines. Its 88,500 miles of routes extend from Lisbon to China, from Alaska to Rio. Its maintenance shops are often far from a source of supply—its mechanics thousands of miles from their homes. Wherever the ships of Pan American fly, good maintenance methods accompany them.

Work goes on 24 hours a day. The big principal 3-deck work stands are supplemented by inspection ladders, platforms for servicing ailerons and tail surfaces. A whole fleet of trucks, tractors and dollies is used.

The metal-working department includes complete equipment for shaping, riveting and welding.



Refinements in beaching gears and handling technique have cut beaching time from five hours to one.

Inspection starts the minute passengers leave the plane. Here an inspector uses the walkway through the wing.

The big 3-decker work platforms have complete shop facilities for engine and propeller work, cabinets for cleaning materials, foremen's tables, inspectors' tables, batteries of flood lights, chutes and containers for oil soaked rags, elaborate plumbing. Bulletin boards carry an up-to-the-minute record of all work orders completed.

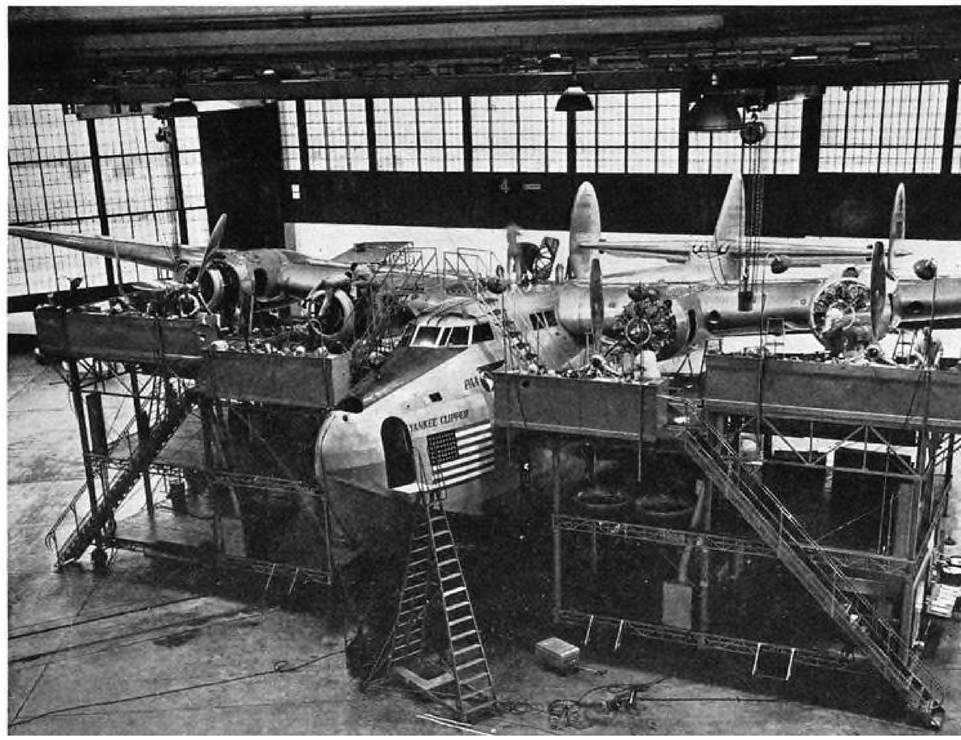

Northwest Airlines Wins Aviation's Maintenance Award

for line flying less than 100,000,000 revenue passenger miles per year.

NORTHWEST AIRLINES has been doing a fine maintenance job since the line started 15 years ago, when equipment consisted of OX-5 engines and Curtiss Orioles and Thomas Morse planes. Over the intervening years Northwest has steadily increased the size of its airplanes and extended its routes. Now it flies from Chicago out over the northern Rockies to Seattle and Portland. If Croil Hunter's hopes materialize, his line will have routes from New York to Alaska via Minnesota, and the Dakotas.

From president down to the men who sweep the hangars, Northwest has always been a maintenance man's airline. During lean years in the past, when dollars had to go a long way, maintenance superintendents, shop foremen and mechanics designed and built new test equipment and many new facilities for handling and servicing airplanes. Today, wherever one turns in the overhaul base, there are evidences of the inventiveness and ingenuity of maintenance men.

To maintain its fleet of Douglas and Lockheed planes, Northwest employs some 250 supervisors and mechanics. They are distributed over eight stations: Chicago, Minneapolis, St. Paul, Fargo, Billings, Spokane, Seattle and Portland.

Maintenance work is done so carefully that mechanical failures are few and far between. Hours between overhaul of equipment, as approved by C.A.A., are among the best in the country. Maintenance costs per mile flown are low, but not so low as to indicate a neglect of important items. Mechanics are well trained and turnover is low. Morale of the maintenance staff is excellent. Shops and hangars along the entire route are clean, orderly and reflect a pride in their work on the part of the men. Due to clean shops, good equipment and thorough training, few accidents occur to shop personnel.

Northwest's men are thinking continuously about new ways to improve servicing methods. One example is the pressurized ignition harness devised by maintenance engineer Carl Swanson. The line had had some engine failures due to ignition trouble. A strenuous attack was made to solve the problem and the pressurized ignition harness was the result. Chet Brown of the propeller shop has devised new equipment for shop use as well as suggested solutions to design problems that have been used by Hamilton Standard. New tools, new test methods and maintenance procedures are found in each of the service shops.

Northwest's president is Croil Hunter, a staunch believer in good maintenance.

George Gardner, V.P. of Operations, has contributed much to fine maintenance record.

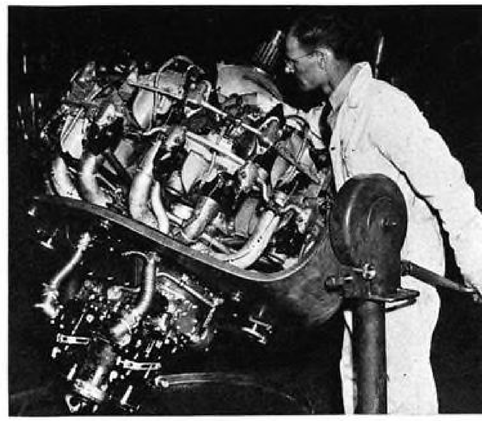

Al Volk demonstrates an engine stand which can be shifted in position by turning the crank at right.

Ralph Geror is Maintenance Superintendent. On him rests the final responsibility for keeping airplanes in serviceable condition along Northwest's extensive routes. He is one of youngest maintenance chiefs.

Henry Aune, former maintenance supt., is expecting Navy duty; meanwhile is superintendent of engine dept. For many years he has been a solid builder of dependable maintenance practices.

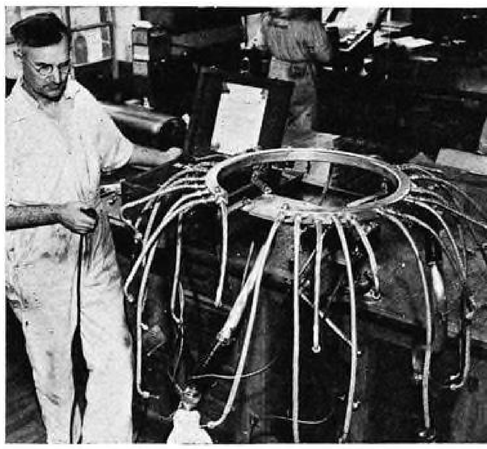

NWA's research engineer, Carl Swanson, developed this pressurized ignition harness which has done much to eliminate ignition failures. Bert Van Kampen is shown shooting 10,000 volts through tubes during test.

Typical of Northwest's department heads is Chet Brown, head of propeller shop. He devised a clip to hold blades to hub enabling one man to do work of three; also an improved propeller balancing stand, a new hoist and a blade locking mechanism. Left: Joe Shuster, NWA prop. man.

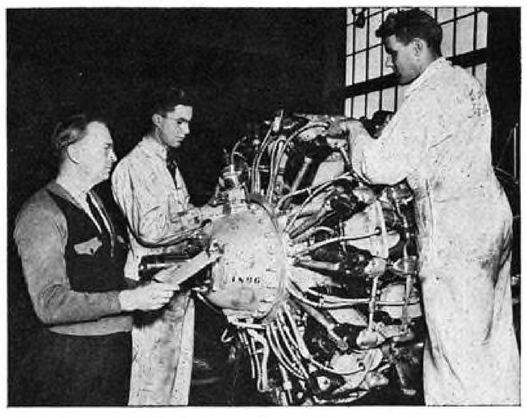

Northwest has a skilled group of engine men. Here, left to right, are Martin Leadon who heads up engine installation and accessory overhaul, Ed. Mathews and Bill Hohag. A fast method of engine changes has been worked out. Changes are often made at Minneapolis. All engines are made by Pratt & Whitney.

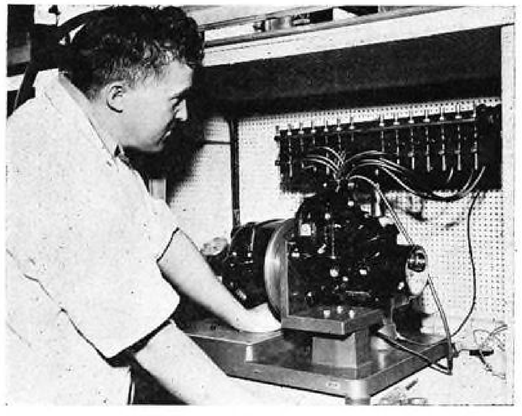

Much special test equipment has been designed or modified. Magneto testing is done in this sound-proofed case, shown with front removed. A glass window in the front panel enables Vernon Bemis, shown here, who is in charge of magneto overhaul, to observe the five hour test given after overhaul.

Maintenance shops are busy day and night to keep planes flying.

Air Corps Learned Plenty ON MANEUVERS But Did the Ground Troops?

By Garrett Underhill

The author has been a close observer of military affairs for a number of years. Since the present war began he has been in a position to see numerous unpublished reports on both air war and ground war on each of the battle fronts. During the recent maneuvers he traveled hundreds of miles, seeing at first hand the activities about which he has written in this article.

THE air-ground operation in the GHQ phase of this year's Louisiana maneuvers involved the greatest military force ever assembled by this country for peacetime exercises. Though the shortage of material remained acute, for the first time in 21 years sufficient planes and equipped ground units were on hand to lend an air of verisimilitude to Army large-scale mock combat.

In the main and longest inter-army battle, 213,000 ground troops of Lt. Gen. Walter Kreuger's Third (Blue) Army opposed 123,000 troops comprising the Second or Red Army under Lt. Gen. Ben Lear. Assisting the Blues against the superior armored and more mobile Red forces were the 200 pursuit and 106 bombardment aircraft of the Third Air Task Force under Major General Herbert Dargue. The Red Second Air Task Force wielded by Major Gen. Millard Harmon comprised 148 bombers and 156 pursuits. The total of combat ships was thus 306 Blue to 304 Red—an equalization made possible by the allocation of no less than 100 bombers and 60 fighters from the Navy and Marine Corps. With observation planes under ground army control added in, the grand total of all the tactical planes was 438 for the Blues, and 388 for the reds.

In spite of the stunning impact of Lend-Lease policy upon Air Corps procurement and training programs, the Air Task Forces and observation squadrons acquitted themselves brilliantly. They indicated that the Air Corps, in comparison with ground forces, has a superior ability to withstand over-rapid expansion, and is better prepared for the coming war.

After months of small unit training, the conduct of the average ground soldier and junior officer was a severe disappointment. Deficient in fundamentals of scouting and patrolling that every hunter ought to know, officers and men

Major General Herbert Dargue who commanded the Blue Air Force, Third Army.

Major General Millard Harmon, leader of the Red Air Force of the Second Army.

Partially camouflaged tractor and trailers roll; 1,000 lb. bombs past a line-up of Blue A-20-A's. Umpire rules compelled all Air Corps units to simulate loading of bombs and machine-gun ammunition before flying combat missions.

A Red Curtiss P-40 E under protective camouflage screening built at Esler Field by engineers assigned to work with the Air Corps. Most pilots preferred to leave ships unprotected.

Anti-aircraft units assigned to this Blue field made a weak attempt to camouflage pup tents and guns. It is apparent they were little concerned about keeping hidden from an air attack.

These men of the Red 1st Armored Division are being strafed by a Blue A-20-A. Many gunners did not bother to practice firing on moving enemy planes. Much valuable experience was lost.

Morale of air mechanics was high. These men of 1st Observation Squadron, tired with the day's work, labored all one night to give this Stinson 0-49 a needed 100-hour check so it could fly next day.

Douglas attack bombers releasing 100 lb. bombs in trail as a demonstration of area bombing for Army officers assembled at Barksdale Field

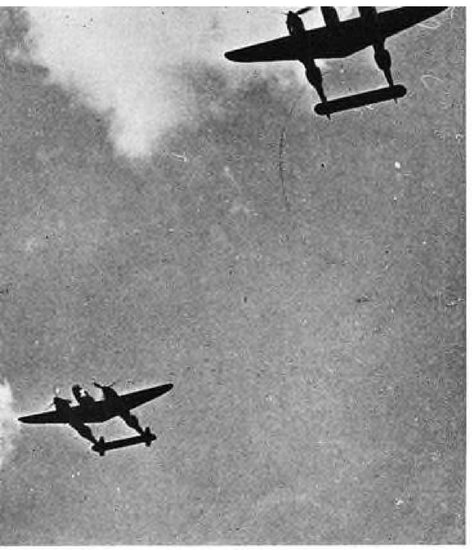

Lockheed P-38's performed brilliantly. These fast fighters were definitely the show planes of the maneuvers.

A Stinson observation plane of the Red Army working cooperatively with an armored half-track. Observation squadrons worked steadily and turned in a fine performance. The 0-49 proved itself to be an excellent airplane and won praise for its maneuverability.

would walk and even ride right into enemy outposts, or else become hopelessly intermixed with other elements of their own forces. At one point a small Blue cavalry detachment captured or annihilated Reds several times their strength, took cargo trucks, a division artillery commander and party, defeated a platoon of armored scout cars,—all because the Reds would insist on driving or marching full tilt along improved roads without the slightest concern for possible changes in the front line. At another place, a Red battalion three times tried to deliver an ordered assault, and each time the attack fizzled out because its line of advance was already clogged with support elements of other Red units which had got there first.

All ground operations were conducted in an atmosphere of mystery, confusion and indecent haste. So abnormally rapid for untrained troops was the tempo of most movements that avoidable errors were committed and bad habits compounded. Unusual was the unit that took the time and trouble to select suitable emplacements for its guns, and to protect and camouflage them even in an elementary way. So preoccupied were troops in rushing about that the simplest rules of cover and concealment went unheeded. In one instance, Blue infantry walked right across an open field in the face of the annhilating fire of four heavy Red machine guns, and by out-arguing weak-willed umpires actually carried the impregnable Red position. Unfortunately the speed and carelessness of these maneuvers had significance outside of an indication of the state of small unit training. These faults meant that higher commanders could not obtain a true conception of the facility and success with which wartime operations could be carried out.

In contrast, the air forces were a pleasant surprise. They, too, worked at a high tempo. In fact, many more missions were flown than had been anticipated. Nevertheless, each mission was normally well-flown and thoroughly umpired. This had to be, since in the air there was less opportunity for surreptitiously cutting corners and getting away with sloppy performance.

It is true that with superior radio communications, air operations were more under central, and therefore, more able control than were the diversified and innumerable actions on the ground. With civilian air raid warning nets functioning fairly well, and with radio locater units in use, interceptions of raiding pursuit and bombardment were carried out with infinitely greater certainty and knowledge than were the assaults or counter-attacks of the land armies.

However, the pilots and squadron commanders proved themselves fully competent in handling situations once higher echelons had passed them on. On the first day of the army phase, a

Two photos above show right and wrong way for motor columns to operate. Top picture shows widely spaced units of 33d Division. Machine guns are ready to fire. Lower picture shows Red armored forces bunched closely together in spite of Blue air domination. After their first curiosity was satisfied, majority of ground troops paid little attention to air strafing.

Left: the 2nd Army field at Lake Charles, La. In foreground, masked with the white cross of the Blue air force, is a Douglas transport. Light grey planes in centre are Navy Grummans. At lower right are mobile repair shops. This concentration of valuable equipment shows a dangerous disregard for enemy bombers.

Red pursuit formation was returning to Barksdale Field. As it began to form a landing circle under the low overcast, Blue P-43s swept out of the rain clouds and pounced on them. It turned out that the Blue intercepter officer had sent out his squadron at just the right moment—for all Red pursuit at Barksdale were servicing—and that his squadron commander had chosen the proper time and place for the attack. Before fresh Red interceptors could take the air, the Red P-40s which had not already landed were out. No sooner was that action complete than the Blue squadron picked out and shot up nearby artillery ammunition trucks of the First Armored Division. In war this surprise attack on the most vulnerable part of the armored march column would have raised havoc with the passage of the tank division through the choke points near the Shreveport bridge.

If anything, the air forces may thus be said to have normally done the right thing at the right time. When accompanying Red armored divisions in the main and longest battle of the maneuver, one could count on a devastating attack from Gen. Dargue's bombers the instant any concentration was made. Red engineers maintaining the vital 1000-foot pontoon bridge across the Red River at Campi were kept very busy replacing bridge sections which were umpired out, for no sooner would repairs be complete after one bombing

(*Turn to page 198*)

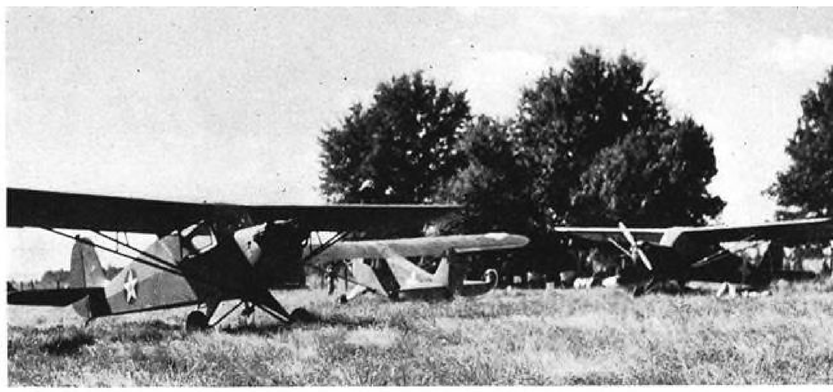

Many hot-shot pursuit pilots were afraid to fly these grasshopper planes. Pipers, Aeroncas and Taylorcrafts were used to excellent advantage by both sides. They were able to get along without airports, landing on roads.

Above: 1st Observation Squadron awaiting the dropping of a message by an 0-47 A. The fire ring of gasoline is lit in a pasture to locate spot for pilot. Planes shown in background are Stinson observation ships.

Small photo above shows detail of large airfield at right. Rows of long grass were piled to simulate a farm. Rows were continued over runway by blackening it with waterpaint. The runway itself was darkened and texture roughened by applying mixture of waterpaint, cottonseed hulls and sawdust. Effect from 500 ft. is shown at right. From 10,000 ft. the eye could not detect darkened runway below intersection with horizontal runway. Fake farm, ditch crossing runway and orchard of round blobs would make deception complete. This field is at Camp Beauregard.

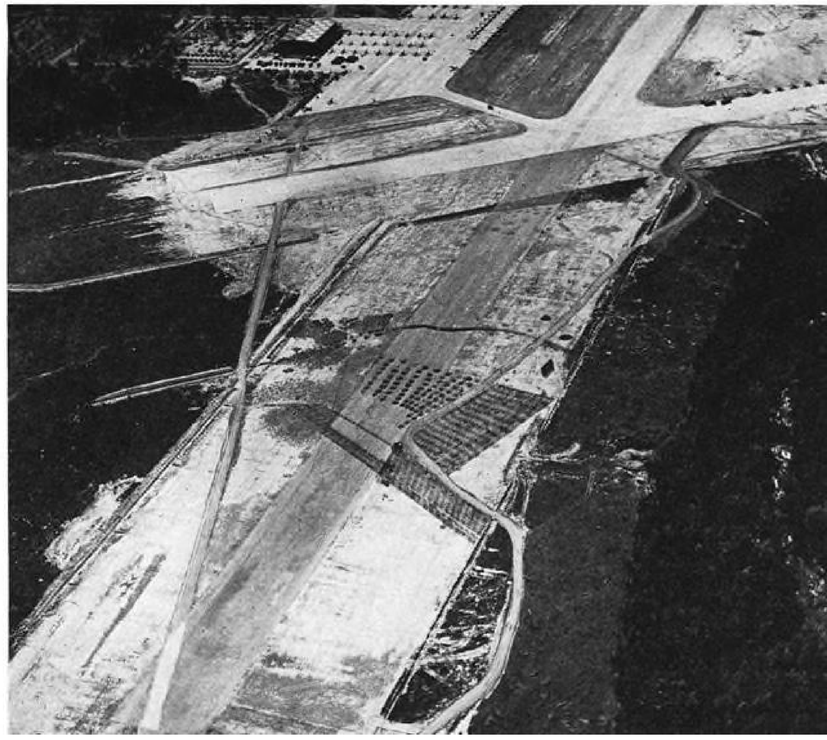

The War and Aircraft

The head of Lockheed's world-wide service organization reveals some of the lessons his firm has learned from the war.

By Reagan C. Stunkel, *Customer Service Manager, Lockheed Aircraft Corporation*

"KEEP 'Em Flying!" On the billboards and the radio, emblazoned across the country in newspapers and magazines and on the lips of Americans, young and old, the slogan "Keep 'Em Flying" seems to have rung the bell in the minds of Mr. and Mrs. John Public. Little do Mr. and Mrs. Public realize that the tremendous task of fulfilling their maxim is one delegated not to our tremendous production facilities but rather to the maintenance organizations of our military air services. And a prodigious task it is!

Strangely enough, there is little precedent around which such large scale maintenance may be planned. Certainly there is little to be derived from the last war. The airline systems, with their smoothly functioning scheduled operations are not sufficiently mobile to permit the extraction of many lessons. Our military systems, on a peace time basis up to the beginning of hostilities abroad, must undergo an abrupt expansion completely beyond the realms of comparison with any similiar program by virtue of the size of the undertaking.

Recognizing the importance and enormity of the job to be done, on April 29, 1941 the Air Corps created the new Maintenance Command at Wright Field. A completely new branch of the Air Corps organization, the Maintenance Command has already made deep inroads into the maze of problems presented by the maintenance of our new Air Force.

It will be of interest to review some of these problems. The modern fighting airplane is a complex bit of machinery to maintain in operating condition. With the advent of high output, turbo-supercharged engines, complicated hydraulic systems, automatic power plant controls and innumerable other advancements, all applied in a different manner to different types of aircraft, maintenance problems mount to formidable heights in direct proportion to the number of aircraft being operated. Add to this the inevitability of the most difficult operating conditions imaginable, for the days are gone when work can be accomplished in the warm recesses of a well-lighted hangar, and some idea of the heartbreaking task may be had.

The British have found that under actual conditions of war, it is impractical to keep more than a very few aircraft in a hangar at the same time. They must be spread around a field, under trees or camouflaged to prevent loss due to bombing. The maintenance must go on, however, in spite of the ravages of the elements.

Aircraft returning from combat flights may require new wings, engines, or other major components. These changes must be made in the open under the most trying conditions. Maintenance equipment, then, must be designed

Reagan C. Stunkel

for just such conditions. Aircraft jacks, used to lift the planes to check landing gear operation, must not sink into soft ground when the weight of the aircraft is applied. When the airplane is jacked up, a gasoline driven hydraulic test rig must be used, since no power is available for electric driven equipment. If an engine is to be changed, a portable crane must be available to swing the old engine off and the new one on.

Aircraft damaged so severely that repair is impractical in the field must be returned to the major repair depot. We have seen aircraft return with entire sections of the fuselage, tail group or wing shot away. One aircraft actually completed its mission with one entire bay of the fuselage shot away, leaving the interior open to the airstream. At times these damages are not sufficiently great to justify returning the plane to a depot. It is then a squadron maintenance problem. A portable workshop with drills, riveting equipment, and a source of power supply for operating the equipment must be used for this type work. Generally speaking, a repair job requiring less than 48 hours is accomplished in the field.

The question of the proper equipment

Moving damaged bombers from a distant point to a major repair depot is a job requiring great dexterity as well as ingenuity. These are Lockheed Hudsons.

Maintenance

for field repairs is a vital one. A great deal of foresight and planning now in the selection and design of maintenance equipment will make the maintenance man's job an easier one later. Above all, the equipment must be mobile as a unit or "en masse". Operations in Europe have demonstrated that armies must move rapidly and can place little reliance on fixed base maintenance activities. The equipment must be carefully selected to permit the accomplishment of any field service job which may be presented.

Aircraft forced down away from the operating base are often damaged beyond the resources of the field repair station. In England these aircraft are quickly surveyed, and if repairable are given the necessary temporary repairs to permit the aircraft to be ferried to the Depot. Aircraft not so repairable are likely to be scrapped. Surface transportation of aircraft in England is difficult due to the narrow confines of the highways.

In most localities in this country it is possible to convey moderate sized aircraft by highway to a depot. Activities outside the boundaries of the United States are likely to be more restricted, however, and necessitate, in some cases, the abandoning of damaged aircraft because of the exorbitant cost of bringing them to a depot. In any event, special equipment and trained personnel are required to handle the survey repair, or transportation of equipment to a depot. Under wartime conditions, this job is a particularly important one since scarcely a single large-scale activity will pass without the necessity of retrieving damaged aircraft.

In general, it is much more practical to effect temporary field repairs to permit damaged aircraft to be flown to a major repair depot. These temporary repairs must be accomplished by a mobile field unit, either flown or transported by truck to the scene of the repair, and by personnel well versed in the emergency repair of any type of aircraft.

Our own Air Corps has a number of well equipped and expertly staffed Air Repair depots. These are being augmented by additional depots located at

(*Turn to page 204*)

The Hudson at the right can be put in operating condition in the field, but the trainer is damaged so badly that it must go back to a depot before it can fly again.

Considered as minor damage, this shell-torn wing is repairable in the field. Repairs of this type must be handled efficiently and rapidly.

This damage is also repairable by field maintenance men.

Keep 'Em Flying—Abroad

Acceptance of American airplanes abroad depends not only on the quality and performance of individual types. Another important factor, too frequently neglected in the past, is the adequate supervision of maintenance service.

By Arthur L. Fornoff, *Service Manager, Bell Aircraft Co.*

Art Fornoff went to England in June to establish assembly and servicing facilities for Bell Aircraft, and returned the middle of August. Traveling by transatlantic Clipper, the crossings were accomplished without incident. He is leaving again, early in November, to continue his good work in Britain.

Eloquent testimony to the value of Fornoff's service abroad is contained in a recent letter from Edward Warner, Vice Chairman of the Civil Aeronautics Board, who himself spent some months in England early this year. He writes: "The role of the American industry's service representatives in England and in other combat areas is of enormous importance in getting the American equipment into effective service, and so to the general success of the war effort. Even the best of aircraft and the best of operating organizations will benefit by being properly introduced to one another; and it is immensely helpful to have new types accompanied or preceded to the war area by properly qualified factory representatives, acquainted not only with the details of design, construction and maintenance requirements, but with the tests undergone and the operating experience acquired in the United States. It is not easy to spare men of the right stamp from the factories, hard-pressed as they are by the problems of production; but no one could have spent any time in England in recent months without feeling the importance of assigning such men as Mr. Fornoff (of whose services I have heard very flattering report from England) to stations in Britain. There have been a number of such men, representing a number of companies; but during my own time in England the supply seemed always to fall well short of the need."

WHEN in the early fall of this year Airacobras began reaching their fighting stations in Britain our service men had long been planning, planning against every conceivable eventuality which might prevent these planes from rendering the maximum service for which they were so painstakingly designed and built.

On the basis of subsequent experience, the organization of service and maintenance abroad has resolved itself into eight major phases;

1. Preliminary preparations here.
2. Establishment of erection base abroad.
3. Flight testing after assembly.
4. Inspection to determine operational fitness as of that date.
5. Preparations for modifications to make plane operational.
6. Day-to-day task of keeping planes in service operational.
7. Provision of trained personnel for instruction in actual overhaul and repair.
8. Coordination with "sister" firms abroad.

The Expeditionary Force

Although on an infinitely smaller scale, we nevertheless planned our British expedition with a thoroughness that would have done credit to Hitler's own Blitzkrieg commanders. Drilled into each man was the resolution that nothing short of total demolition should stand between these fighters and the thin air high above Britain. Moreover, they were instructed to assemble and relay to the United States all possible information to assist us in providing better and better airplanes as time went on. The various phases of the program are discussed in the order listed.

One. To date, seven of our ablest engineer-mechanics have been selected to assist me in supervising service and instructing British mechanics in maintenance of our airplanes. At the outset, a number of complete servicing kits were assembled. They were sent by different routes at different times to insure the safe arrival of at least one in spite of possible mishaps, and a master reference set remained in the United States.

Each kit contained a complete set of tools necessary to perform any repairs, complete sets of blueprints and drawings and all operating and service manuals. Each man was advised that he need not be financially responsible for any tools left in England, for it was felt that to leave these tools wherever a need existed was far more valuable to us than the cost of replacement. In the case of large or special tools which were to be supplied under contract or by the customer, complete blueprints were included so they might be duplicated in an emergency.

Two. As soon as the erection base was selected, our men went to work setting up assembly lines patterned on those of the home plants. We arranged for the procurement and training of local labor. We endeavored to train these workers to perform a few operations efficiently at a single station in order to train our crews in the shortest possible time. Dollies, workstands, hoists, all had to be in readiness.

Three. As the aircraft were assembled, utmost care had to be exercised to see that each airplane was in perfect shape to deliver a safe and satisfactory performance. Particularly in view of the many handicaping circumstances was it necessary to conduct the most rigid inspection of each plane and its equipment before okaying it for flight.

Four. Following the completion of successful flight testing, operational groups inspect the plane to determine what modifications need to be made in design or equipment to bring the original model up to date in accordance with operational requirements as of that time. Under wartime conditions improvements are developed and applied with surprising rapidity and certain operational requirements must be met which are rarely foreseen prior to actual combat operations. With respect to the Airacobras, only minor changes were found to be necessary.

For example, the antenna location might be satisfactory for normal operations, but might constitute a real hazard to a weary fighter pilot jumping out of his cockpit in absolute darkness. It must be moved to avoid any possibility of injury to the pilot. Ammunition boxes, oil tanks, refueling points, prestone tank, all must be easy of access and simple to find and service in darkness and under all weather conditions. Guns must be so installed that they can be pulled out and replaced in a matter of minutes. All such modifications must be made before the plane can be accepted for combat duties.

Five. Not only must the modifications be made on the aircraft already completed and those under assembly, but preparations must be made to see that these changes are accomplished with a minimum loss of time on all planes in process of manufacture and to come.

Six. Once the planes are made operational and placed in active service, there begins the long steady grind of keeping each one serviceable, day in and day out, under all weather conditions, no matter where it might be. This cannot always be accomplished by merely following the letter of a legal contract. It requires compliance with the spirit of a contract of good intent which transcends ordinary concepts of servicing obligations.

In this connection, I have never forgotten the attitude of one of my earliest employers. He was in the automobile business. "Service," he told me, "is nothing more than being pleasant to the customer to keep him satisfied. If a recent buyer comes back and wants you to look over his car, just stand on the running board and look over the top; technically, you will have fulfilled your obligation."

My deep personal conviction ever since has been that he confused "looking over" with "overlooking." He overlooked the important thing. You can't keep a customer sold throughout the years by such tactics. So, our service men are not likely to quibble over the line where their responsibility ends and some one else's begins, nor do they wait to "let George do it" or haggle over items of expense. Nothing short of an act of God or man-made catastrophe of major proportions will deter them from procuring spares or tools, effectuating repairs or whatever else is necessary to keep their ships flying. To this end, they are given all cooperation and encouragement possible by the remainder of our organization.

Seven. Since, obviously, a Bell Aircraft service man could not always be available as the numbers of Airacobras in service swelled rapidly, we exercised the utmost care in the selection of men to serve as instructors to British assembly workers and service teams. Four specialists were chosen on the basis of their experience and the ability to impart their knowledge to others. They comprised a structures and stress engineer, a man who knew all the answers on assembly and production, an instructor on repair and overhaul, and an electrical engineer who was thoroughly familiar with all accessories and equipment.

The whole problem of adequate maintenance of American equipment abroad has been aided greatly by the British decision to send "service teams" to America to be thoroughly schooled by various manufacturers in the repair and maintenance of their own types of aircraft.

Eight. For the various American manufacturers supplying planes to the British, "sister" firms have been appointed among Britain's aeronautical producers who are responsible for the assembly, overhaul and repair of a specific American product. Naturally, the fullest cooperation and mutual assistance between the "sister" firms of the two nations is essential. The American manufacturers can make a large contribution by seeing to it that their sister firms are provided with the most complete information possible. They should be sent operation manuals, standards books, all blueprints, complete stress analyses. The American producer also should see to it that the British concern receives promptly the same complete information on all accessories and every bit of equipment on the airplane, no matter where the origin of supply.

The Broader Concept of Service

"Sales and service" has become a common phrase in modern industry. But service all too often is just an

(*Turn to page 188*)

British Combine

These are the first of the Bell fighters to go into active service in England.

First three engineers to go to England for Bell: left to right: Robert Clydesdale, Arthur Fornoff, Kenneth Frey.

A squadron of Bell Airacobras in England.

British Press Service

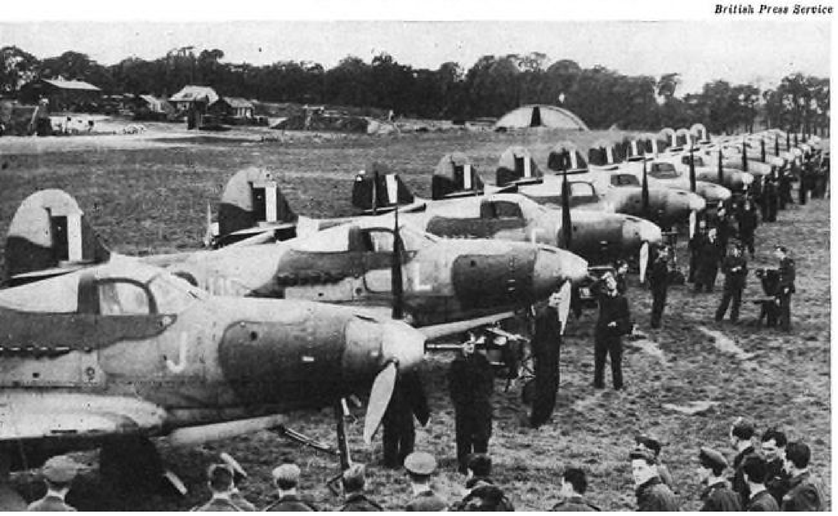

Maintenance on the Move

The Air Corps has new equipment and methods for servicing combat planes in the field.

MAINTENANCE in modern war has by necessity been designed to keep pace with the rapid offensive tactics of the air forces. There was a time when large fixed depots with outlying semi-fixed sub-depots could maintain and supply tactical squadrons. From these the squadrons were serviced in order to remain operating and clear the ground ahead of the relatively slowly moving troops. But with mechanization these troops moved faster, and so did the air force and now so does the air force's maintenance.

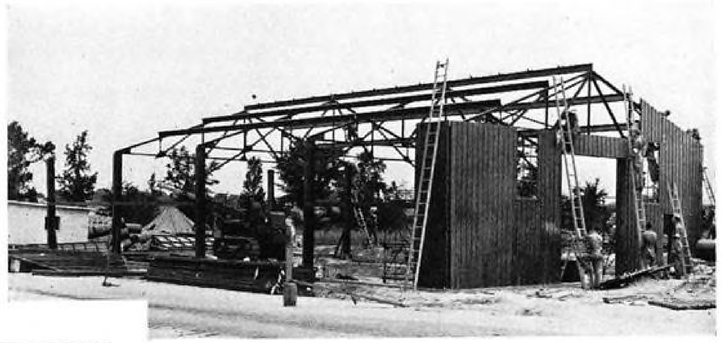

The 4th Air Depot Group, organized at Patterson Field and transported South by huge motor trucks, erected a number of temporary buildings. Construction was done almost overnight. Buildings were used for a variety of Air Corps purposes.

Above view is an interior of one of the trailers shown at the right. A wide variety of machine shop and sheetmetal work can be done. In the left background is a Do-all machine, which is typical of equipment.

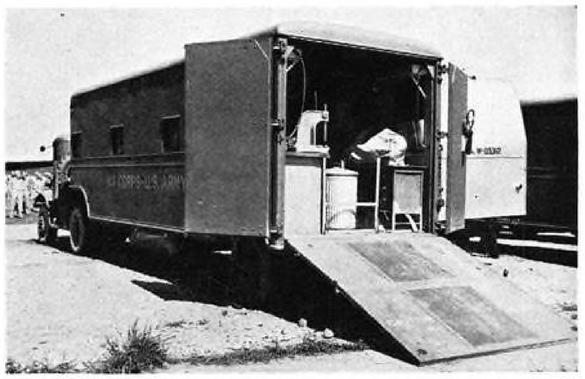

Exterior of portable machine shop of the 4th Air Depot Group, as used in Southern maneuvers.

A portion of the mobile equipment just before it left Patterson Field for the Air Corps maneuvers.

The latest development in this race to keep abreast of the fighting units of the Army Air Corps is the Mobile Air Depot Groups—a mobile repair and supply unit designed to "roll along" behind the advancing front lines. It holds a unique place in the gigantic organization of the Air Service Command in that it functions in the theatre of operations, doing all but completely rebuild an airplane within shell fire of the enemy. Its purpose is to be a connecting link between the zone of combat and the zone of the interior.

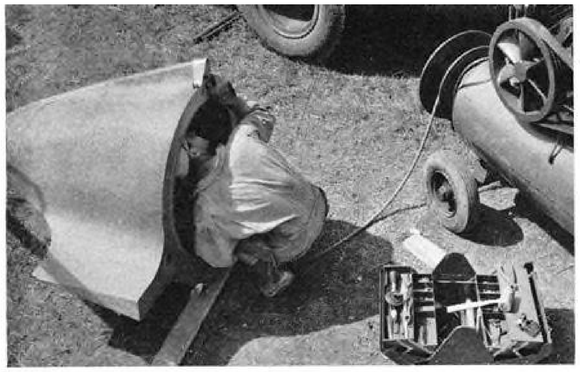

Photographs on this page are of the 25th Air Base Group, regularly stationed at Orlando, Fla., which was attached to the Third Army in the Louisiana maneuvers. This is a tail assembly repair job.

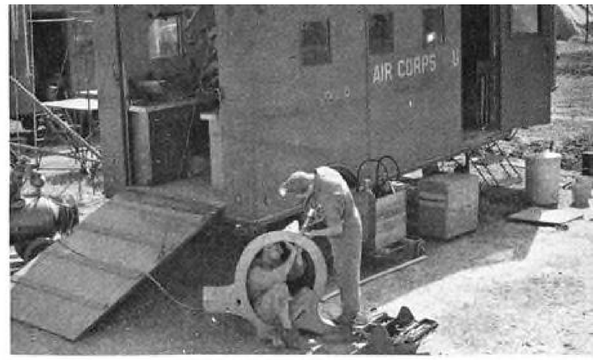

This type of mobile machine shop is slightly smaller than that shown on the opposite page, but it is well equipped with tools necessary for light repairs which have to be made in the field.

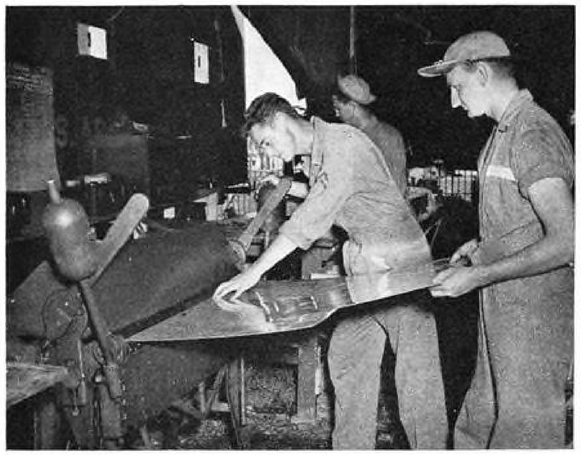

To provide mechanics with more space, sheetmetal equipment was moved into lean-to tents next to mobile machine shops. These are not posed pictures, but actual work being done near Beaumont in September.

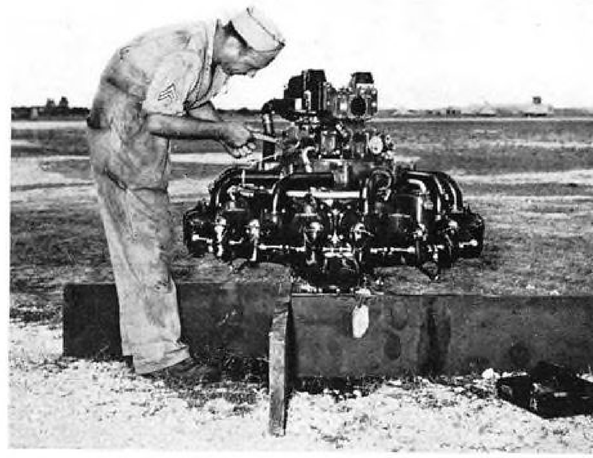

At Lake Charles, La., this practical engine stand was used during engine changes. The 25th Group comprised about 20 officers and 275 enlisted men. Service was given to both army and navy planes.

Method of Operating

The Air Depot Group is organized to install and then be prepared in a period of ten days, if necessary, to transport itself, or to be transported, to the next designated point of operation. In tactical situations where the advance is so rapid that even this period is too long, the units are "leap frogged" so that as one unit is being used another is in readiness in reserve to move ahead. While this is taking place the unit just operating is packed up and held in reserve to make a similar move. Thus with this speed maintenance is assured in any eventuality.

In combat the unit is able to perform all of the necessary maintenance work to meet the existing situation. It is responsible for supplying and repairing all of the aircraft that it is servicing as well as salvage parts from crashes. To do this a very flexible organization has been built around the necessary fundamentals in order to have equipment available under any circumstances. If tropical jungles are to be encountered it is obvious that the requirements are not the same as for far northern climates. However the machines for repairing and maintaining the planes are present for outfits serving in either location.

In addition to the supply of materials for the combat units the Air Depot Groups also supply the personnel required for operation. In case a plane and crew is lost by one of the squadrons, for instance, the officer in charge notifies the Air Depot Group of the personnel needed to fill the vacancy and the orders for the replacement are issued immediately. To keep a reserve pool available, officers and enlisted men are assigned to these depot groups and ordered to wait there for further orders assigning them to a combat unit.

These units serve four tactical groups including bombardment, pursuit,

(*Turn to page 166*)

Mechanics of the 47th Materiel Squadron making an engine change at Lake Charles, La. Temporary scaffolding was rigged from which a chain hoist was suspended. A considerable amount of portable field test equipment was used by these mechanics.

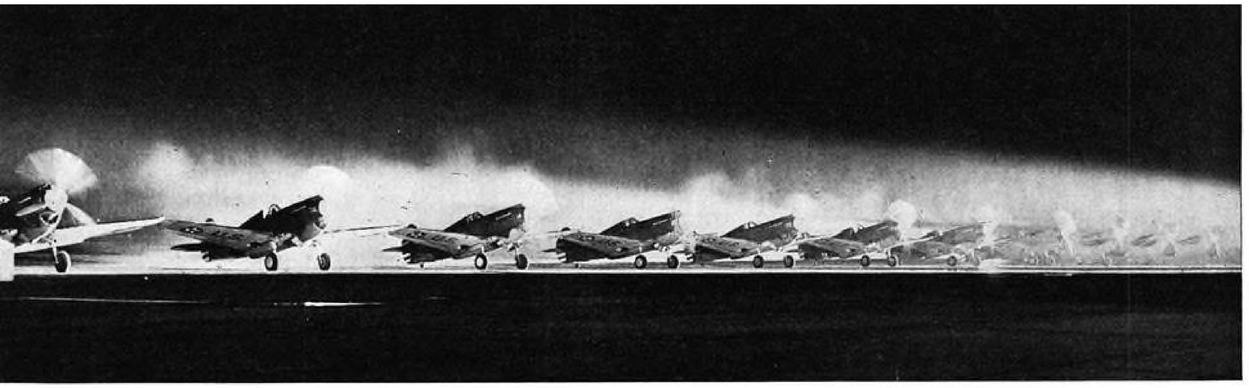

P-40's on the line warming up for a night flight. Mechanics work steadily night and day to keep these ships in action.

Men On The Ground at Hamilton Field

Maintenance men of the Air Corps are doing a vitally important job at every training and tactical field in the country. Work at Hamilton Field, California, is representative of that done at most of the larger pursuit fields where Base Engineering Officers are stationed.

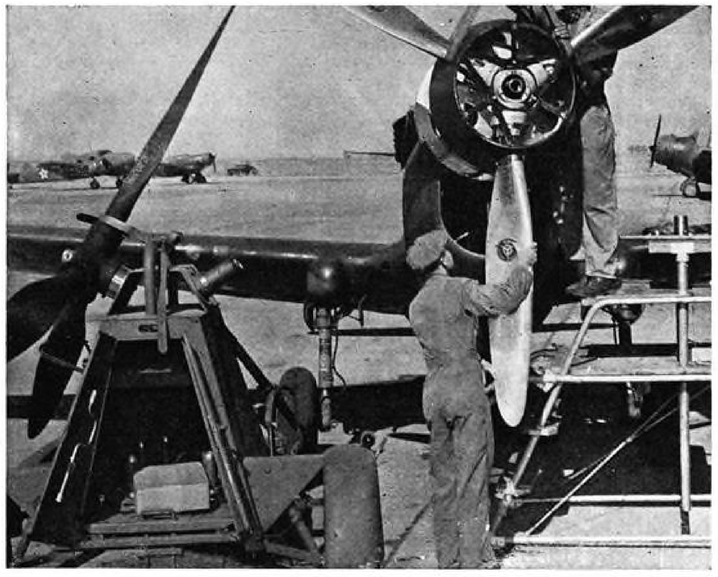

This double dolly speeds propeller changes. The unit taken off the ship is swung on the shaft at the right, by means of an overhead chain hoist. The propeller now on the dolly is then put on the ship. The dolly has three rubber-tired wheels, can be pushed by men or towed by a tractor. Propeller tools are kept in the cabinet forming body of dolly.

Official U. S. Air Corps photos by 45th Air Base Photo Section.

ONLY a pilot appreciates good maintenance work. As he pursues his mission over rough mountains and turbulent seas he must know that his engine and plane will not force him down. Although it nestles in a sunny California valley, Hamilton Field is surrounded by treacherous mountain peaks and often by fog-filled valleys. Pilots of the 20th and 35th Pursuit Groups, who fly from this advanced tactical base, have learned to put confidence in their partners on the ground who work around the clock to keep the P-40's flying.

The combat ships at Hamilton Field must always be ready. One month, with only an hour's notice, ships, pilots and mechanics are whisked off to a temporary field somewhere in the mountains, from which they must carry on all operations. Another month the squadrons move to war games in the South or off to maneuvers elsewhere, a thousand miles or more from their base. The maintenance men must make sure that planes are always ready.

Photographs on these two pages show a few of the many jobs mechanics do at Hamilton Field. All pictures were taken for AVIATION by the Photo Section of the 45th Air Base Group of the U. S. Army Air Corps.

Left: sheetmetal mechanics are shown riveting a reinforcement on the gun cowling of a P-40. Parts for the new brace were assembled from blueprints and then installed.

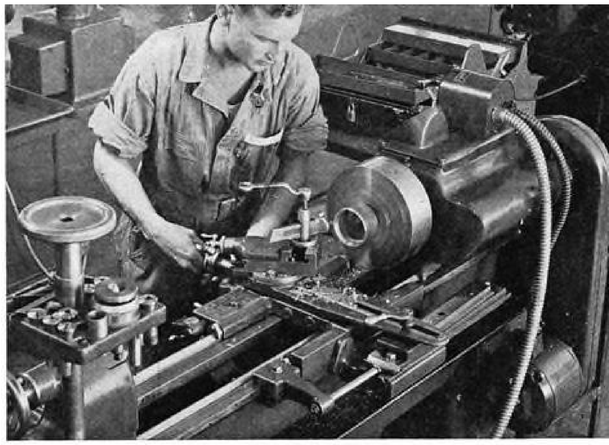

Typical of shop equipment is this precision engine lathe, operated by Pvt. Ted Rudntsky, which can be used for a wide range of work, from as large as turning contacts on propeller hubs or as small as putting 80 threads per inch on a small bolt.

General view of the Base Engineering shop at Hamilton Field. This shop is clean, well lighted and equipped with lathes, radial drills, surface grinders and other machine tools and a variety of sheetmetal equipment. Officers are proud of the high caliber of work turned out.

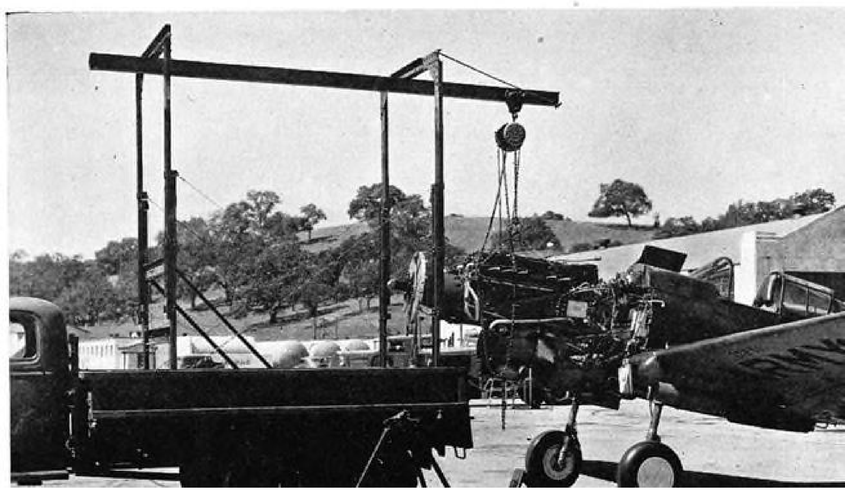

This sturdy, 6-wheel truck was adapted for changing engines, both at the base and in the field. A sling is secured to the Allison engine which is swung free after all connections have been unfastened and the mount unbolted. Then the engine is reversed so that the rear of the engine goes on the truck first. The engine mount fittings are secured to the two horizontal members on the uprights at the left on the truck. The propeller shaft rests in the support now shown resting temporarily on the ground.

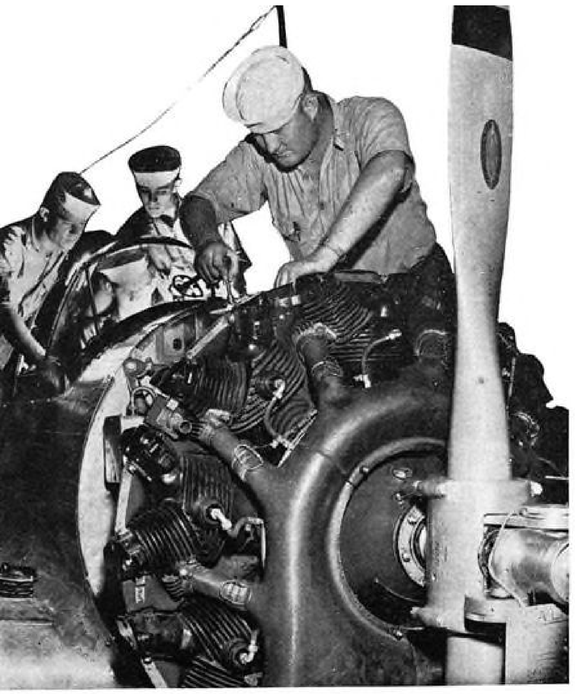

Corpus Christi

At its new Air Station in Texas the Navy has built a great, sprawling city of barracks, hangars and flying fields. In these two pages of photographs are shown some of the maintenance activities that keep Navy airplanes flying.

U. S. Navy official photographs

As each new airplane is received it is given an acceptance check. These mechanics are going over a new Curtiss trainer from propeller to tail.

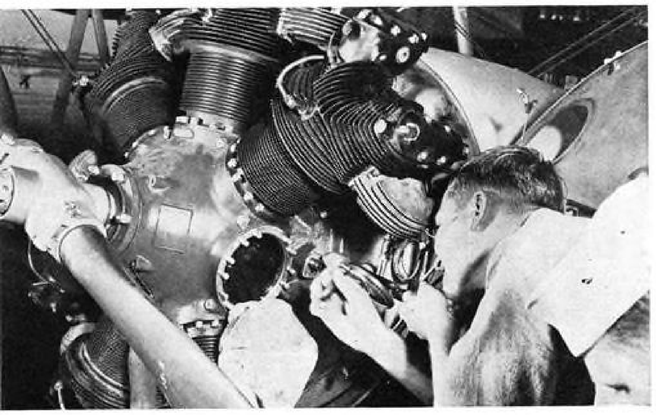

Emergency engine repair on a Stearman trainer. Unlike the Air Corps, which sends engines requiring major overhauls to central depots, the Navy does all engine work at each station, including the numerous Naval Reserve bases. Mechanics must learn to do all-around engine maintenance.

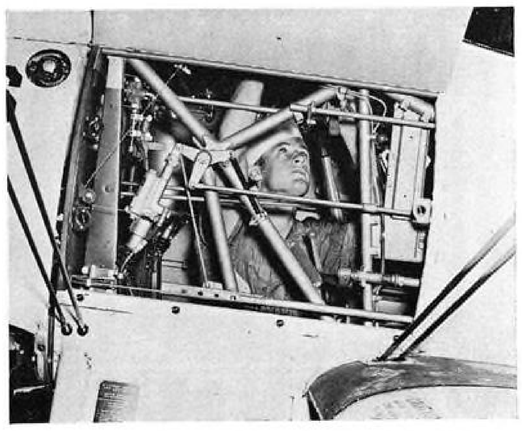

This mechanic is checking a turn and bank indicator line on a Navy Stearman trainer. A wide panel, which hinges at the top, can be opened for maintenance work. Because of rough treatment they receive, trainers are given daily inspections.

Another view during an engine check on an SNC Curtiss trainer. This engine cowling hinges at the top and can be lifted out of the way. The Navy uses many types of eng nes and mechanics must know each type.

Lubricating the landing gear of a Stearman trainer with a pressure grease gun. Due to the warm weather at Corpus Christi, maintenance can be carried on outdoors the year around.

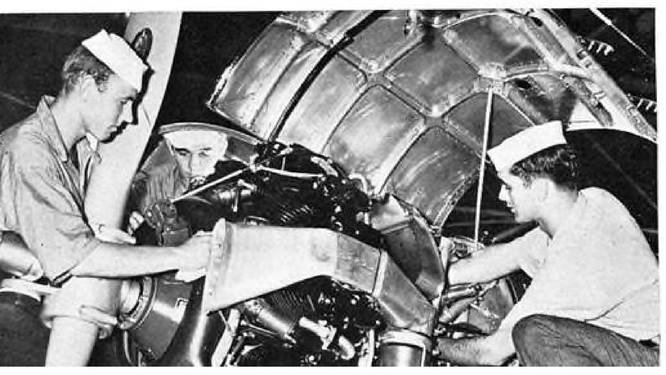

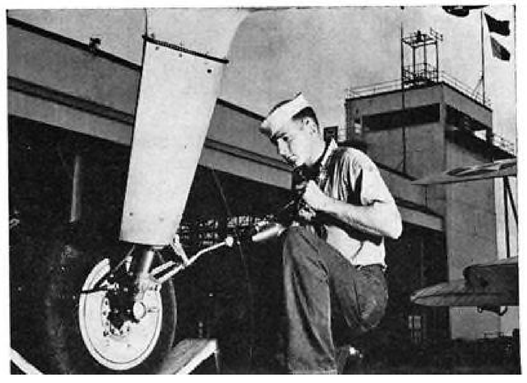

Above: Navy mechanics checking and inspecting the hydraulic system of a SBC-4 Curtiss Scout Bomber.

Left: Start of general overhaul on a Curtiss Scout Bomber in the assembly and repair shop. Any kind of repair can be made.

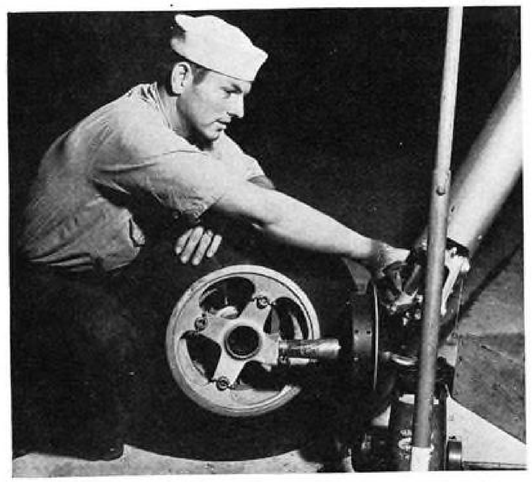

Brake inspections are made at periodic intervals on all ships. This is a Navy Stearman trainer.

One of the many types of airplanes operated at Corpus is the patrol bomber. This is an engine check on a PBY.

Inspection of an SBC-4. This complex maze of tubes, wires and controls shows why maintenance mechanics need specialized training. Many new mechanics are trained here.

A four-bladed test propeller is used for the ground run-in during engine tests. This engine has had a major overhaul.

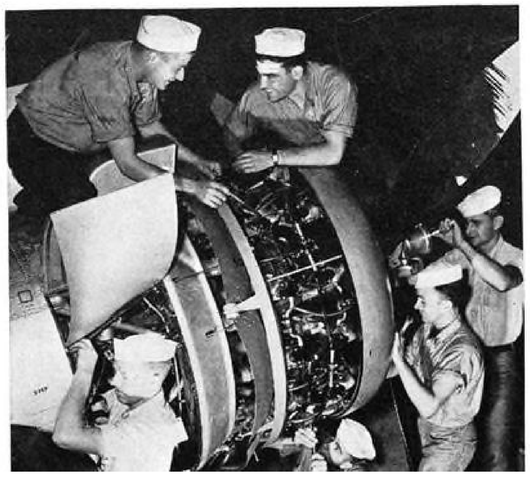

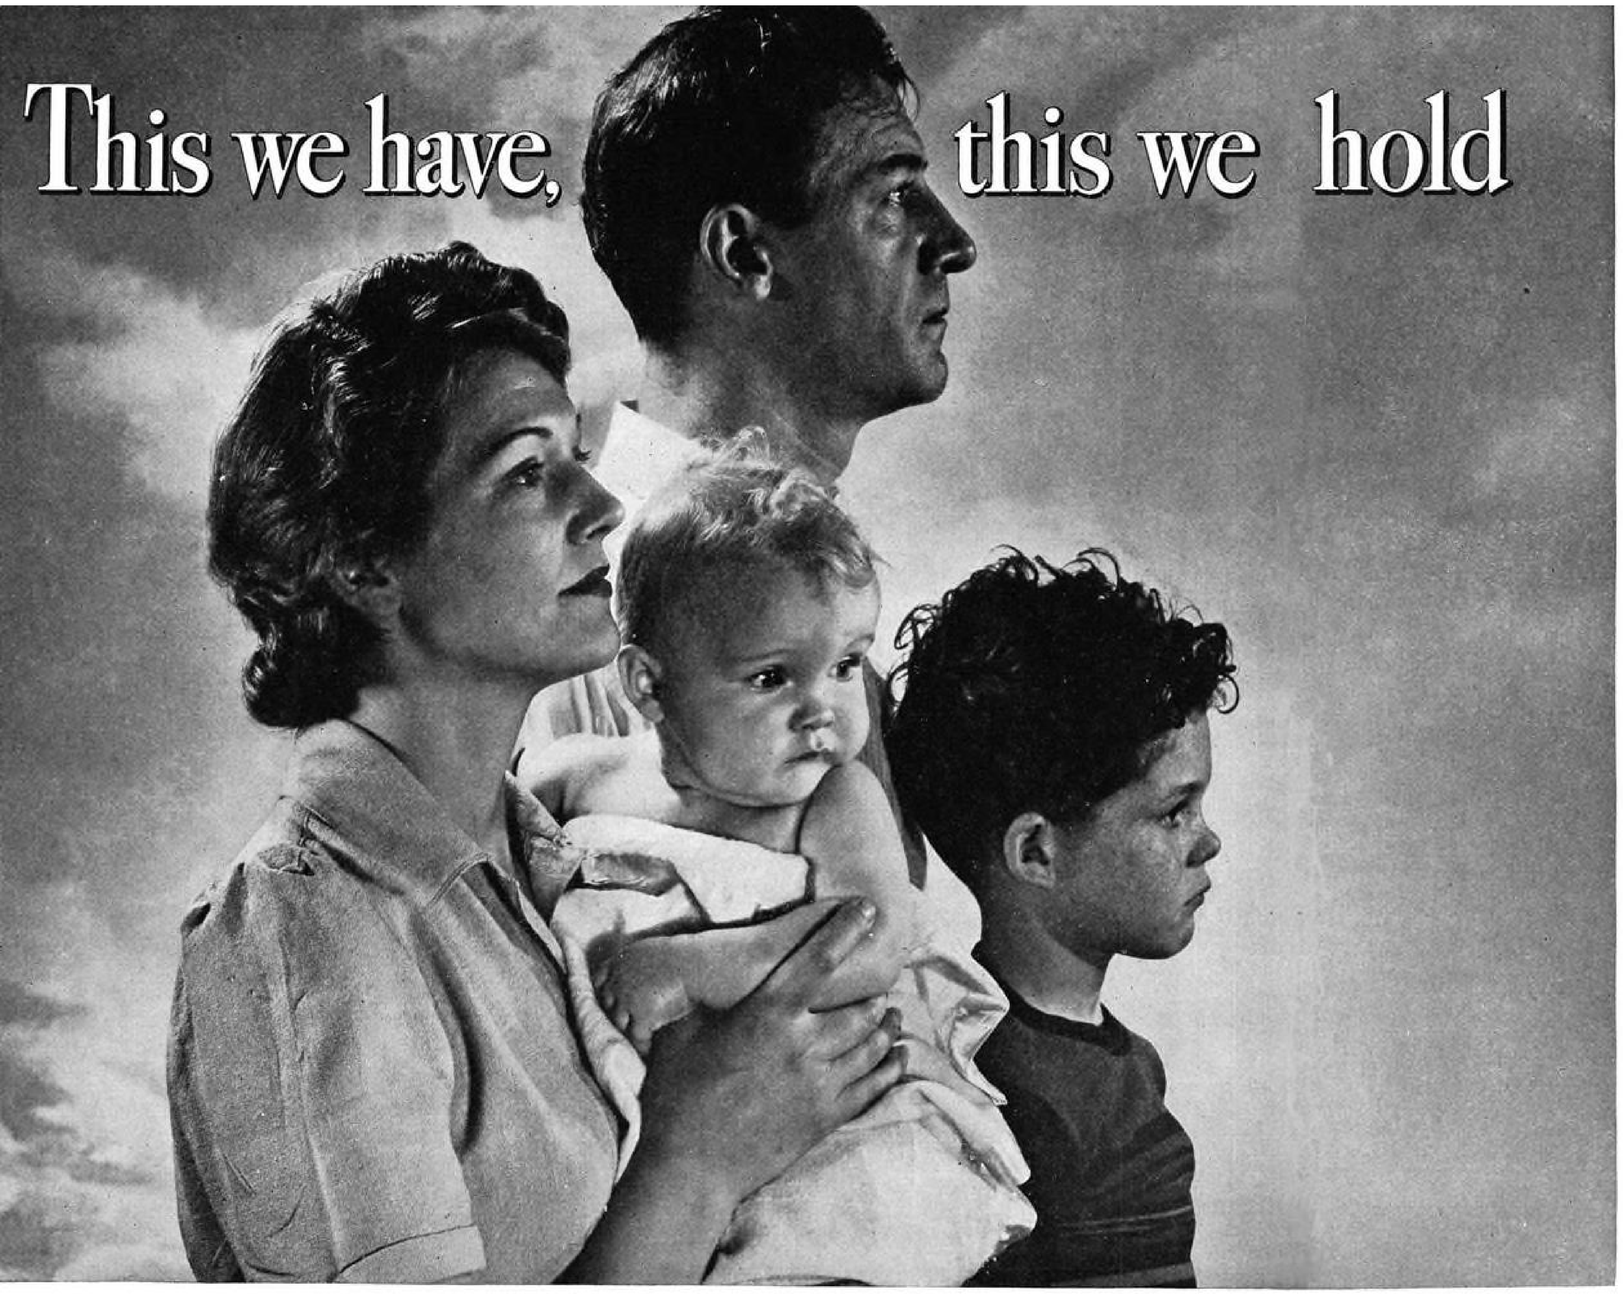

THERE is the right of a man to stand on his own two feet, and with his own hands and talents carve out a place for himself and his family.

There is the right of a woman to look hopefully ahead, to raise up her brood in dignity and self-respect, undictated to save by her own mother-wisdom and conscience.

There is the right of a boy to lead the hale, free life of boys, flying kites when the wind blows, playing cops and robbers when he wants, going to school when he must—and out of it all somehow shaping a future to a good pattern.

There is the right of a small child to its chance for health and love and laughter, to a good start toward who-knows-what fine and useful life in years to come.

Simple things, aren't they, these things that spell America and add up to freedom!

So simple, so wholesome, it seems daft that somewhere bombs scream down to blast them, tanks lunge to crush them, bullets fly to drive from the minds of men the idea that these *are* their rights, inalienable.

But the bombs do fall, the tanks do roll, the bullets do fly—and in such a world our only shield seems to be more bombs of our own with bombers to carry them, more tanks and the cannon to arm them, more bullets and faster guns to fire them.

So it is that from Goodyear factories meant for building things to enlarge life and make it better, now must flow in a swelling tide the things our country needs if we are to hold what we have.

Skills and facilities developed that a peaceful world might have better tires, floor coverings, soles and heels, transmission belts and a thousand like useful things, now focus on the making of barrage balloons, bomber wings and tails, bullet-puncture-sealing inner tubes and fuel tanks, gas masks, rubber tank track treads and a host of other Goodyear-made defense products.

This is no choice of ours—like yourself, we would far rather spend our days making this a land where life can be richer, liberty enjoyed, where the pursuit of happiness can go steadily on.

But when the decision lies between helping our government prepare for impregnable defense of such things, or running the risk of having them swept away, there is no option and we feel as we know you do.

That which we in America have, we intend to do our part to hold.

Compared with holding it, what else matters?

AMERICA MUST BE FIRST IN THE AIR

Unless and until America is the most powerful nation in the air, our safety, our freedom, and our standard of living will not again be what they have been in the past.

P. W. Litchfield

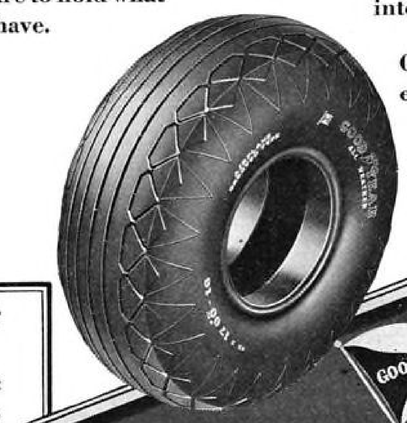

LET'S GO! U.S.A. · KEEP 'EM FLYING!

GOODYEAR

GOODYEAR DEFENSE PRODUCTS HELP "KEEP 'EM FLYING"

British Service Teams Study American Aircraft

Our aviation industry is engaged in a cooperative program with the British to improve handling of American flying equipment abroad—lease-lend program for small tools urged.

OFFICIALS of the British Air Commission acknowledged that a plan is already in operation which is designed to improve the maintenance and servicing of American flying equipment abroad.

Service teams of Royal Air Force enlisted mechanics are being trained in the assembly, repair and servicing of American equipment at various plants throughout the United States where airframes, engines, instruments and other accessories are in production for the British.

Each service team normally comprises six men, non-commissioned officers already highly trained and fully qualified in the R.A.F., one metal rigger (aircraft mechanic); two engine fitters (aircraft engine mechanics); one instrument maker; one electrician; one armorer. The team assigned to a particular type goes to the factory producing that type. They obtain living quarters in the vicinity and remain as long as is necessary to master their subject.

The metal rigger spends his time at the scene of fabrication and assembly, obtaining all the knowledge he can regarding the airframe assembly and all of its components. The two engine fitters study the method of mounting the powerplant, the location of engine accessories, features of installation, proper ways of servicing, checking, replacing minor parts and so on, then they go to the factory of the engine manufacturer. There they study the design and construction of the engine, as well as major repairs, overhauls and inspections. Wherever necessary they also travel to the plants of the suppliers of engine parts and accessories so that they will be completely informed on everything relating to the powerplant.

The instrument maker and electrician follow somewhat the same procedure. After familiarizing themselves with all the instruments and electrical equipment as installed in the completed aircraft, they visit in turn each of the manufacturers supplying such equipment to be instructed in the design, construction and repair of every part.

The armorer is concerned with the installation of armor plate, bomb racks, turrets, guns, ammunition boxes. His job, though as fully important as the others, usually does not require as much time. Therefore, there is not at present an armorer member of each team.

By early November, teams were hard at work with Lockheed Aircraft, North American Aviation, Glenn L. Martin Co. and Curtiss-Wright Airplane Division. Additional teams are being sent to plants of other manufacturers as rapidly as qualified men can be selected and transported to the United States.

In spite of the sizeable handicaps under which these men are working, it is noteworthy that all reports from the firms training the teams thus far have been enthusiastic over the spirit of these R.A.F. men, who are reported to spend 12 hours a day regularly at their job. They do not have unlimited funds at their disposal, and quarters are usually difficult to find in the neighborhood of our big aircraft plants, but with the cooperation of the firms and other assisting agencies most have been made fairly comfortable now.

The instrument men, particularly, have to travel great distances between their assignments and all of the men have to maintain an orderly accumulation of data in addition to their practical experience so that they may instruct others upon their return. The men in these teams are volunteers from service squadrons who have had long years of experience. They evidently have been selected with a great deal of care, to the end that they may not only absorb as much knowledge as possible here but can also impart their knowledge of American flying equipment to the combat squadrons concerned.

The project outlined is directed to-

(*Turn to page* 182)

British Combine Photos

From the "arsenal of democracy" comes this Douglas DB-7 shown being unloaded somewhere in England to join her aerial fighting forces. Some of the American planes have been put into the air within three days of their arrival by ship. The accompanying article discusses problems of adequate maintenance for such equipment abroad.

Mustangs

Range the Frontiers of Freedom

Just as the frontiers of America grew beneath the flying hooves of the mustangs, so today's frontiers of freedom are guarded by North American Mustangs—swift pursuits named for the hardy strain of American wild ponies.

These fleet, agile fighters, in active service with the RAF, are helping Britain attain complete supremacy in the air.

CURTISS-WRIGHT CORPORATION • *Propeller Division* • CALDWELL, NEW JERSEY
CLIFTON • PITTSBURGH • INDIANAPOLIS • BEAVER

Light Plane Maintenance

Lessons about light plane maintenance that have been learned through the C.P.T. Program.

By Donald C. Dobbyn, *Chief, Maintenance Section*
Civilian Pilot Training, C.A.A.

A FEW years ago, when an airplane was purchased, for either commercial use or pleasure, little thought was given to maintenance until the airplane had been in service for at least a year. The need for replacements and overhauls was then brought to the owner's attention with painful clarity, and gradually a consciousness developed that airplane design, operation, and maintenance are as closely allied as the "Three Musketeers." The lessons gained from those days, and the increase in the amount of flying during the last two years have resulted in many changes pertaining to these three musketeers—design, operation, and maintenance.

The national defense emergency, which necessitates the large volume of pilot training being performed by the Civilian Pilot Training Program of the Civil Aeronautics Administration, puts flying time on airplanes at a rate many times more rapid than previously. In order to keep these airplanes going, in this essential training program, it is necessary to pay much attention to maintenance. In view of the more concentrated use of airplanes now, with the attendant increase in required attention to maintenance replacements and overhauls, the impression might develop that there has been little improvement in the maintenance needs of the present-day airplane over the older models. However, a comparison of maintenance repair costs per flight hour readily reveals the improvement that has been made in all three musketeers—design, operation, and maintenance.

The manufacturer of an airplane must furnish a product which operates satisfactorily under the widest possible variety of conditions. Some of his airplanes will be operating from industry, sandy airports which rapidly wear engines and bearing surfaces. This condition indicates the value of such things as hinges with replaceable bushings or dust-proof ball bearings. Other airports are located where extremes of temperature are encountered, and cold engine operation is the rule. Our second musketeer, operation, is important here because engine wear must be prevented by avoidance of over-priming and care to warm up the engine, with external heating devices when necessary, before flight. Some of the manufacturer's airplanes will be operating from fields located 1½ miles above sea level where air is thin and engine powers are low, but where temperatures go to the two extremes. Many of his airplanes are used on rough auxiliary fields, which operation calls for sturdy construction and a frequent check-up on rigging. This sturdy construction, to take care of the rough auxiliary fields, must not result in too much weight which would be unnecessary on smoother fields.

The manufacturer must learn of all these difficult conditions and must incorporate in his airplane satisfactory means of surmounting them at a reasonable cost to the ultimate user. Much of this information he gains in the experimental laboratories and shops of his factories, but most of it must come from the field. Of course, over the past years, manufacturers were able to keep in fairly close touch with their relatively few customers, and from them they gained considerable volume of information and misinformation. The latter because the owner and operator of the airplane was not necessarily schooled in engineering or mechanics.

The present large volume of Government contracted and Government controlled flight training immediately made plain the necessity for overseeing the maintenance and operation of training aircraft in order to assure continued usefulness, at reasonable cost, of each piece of training equipment. In the Civilian Pilot Training Program a nation-wide network of maintenance supervisors has been stationed in the seven regions into which the country is divided. Each supervisor is responsible for the continued satisfactory operation of approximately 60 airplanes operated by some 12 flight contractors. These supervisors were selected because of their knowledge and qualifications as mechanics, and the eligibility requirements they have met are high; sufficiently high that we may put full credence upon the statements regarding mechanical conditions which they send in from their districts. These statements which accumulate in Washington

(*Turn to page 216*)

AIRWORTHY

MANY airport visitors who enjoy watching the big transport planes "take off" may not be aware of the interesting story of service and maintenance behind each liner which rolls up to the runway ready for flight.

Before the Inspector certifies a transport as "airworthy" in accordance with Civil Aeronautics Board and airline regulations, the ship has been through the most rigid inspection. Every inch has been gone over by master aircraft mechanics. Controls, landing gear, instruments, radio installation and motors have been tested by specialists and rechecked by inspectors.

Preparing an airliner for a flight is today a highly organized, systematic job. American Airlines, at the New York terminal alone, employ approximately 1000 men in the maintenance of transports. In the shops, motors are taken down, rebuilt, tested under elaborate controls. Engineering advances are continuously being built into the planes, and passenger ships actually grow better in use.

"The inherent utility and public service of air transportation," says President C. R. Smith of American Airlines, "creates increasing demand which will continue to call for larger, faster planes. Maintenance will become more and more exacting, will require constantly greater skill. It is a vocation for ambitious, intelligent men who have a background of sound technical training."

For such men, the future is bright in aviation.

ACADEMY OF AERONAUTICS, LaGuardia Field, New York
CASEY JONES SCHOOL OF AERONAUTICS, Newark, N. J.

COMPLETE TECHNICAL COURSES IN AERONAUTICS

C. S. Jones
President

ADVERTISEMENT NUMBER EIGHT OF A SERIES ALSO APPEARING IN TIME AND FORTUNE

Servicing Canadian Kinners

By Charles Sander,
Chief Engineer
Kinner Motors, Incorporated

To get to the hangar at the Windsor Mills, Quebec, training field, mechanics and pilots had to carve their way through this deep snow drift.

WHEN the war broke out the Canadian Royal Air Force numbered 3000 men, fliers and ground crew combined. Today it is well over ten times that figure and still expanding at a prodigious rate.

The accomplishment is one of the great sagas of the war. Starting from scratch all along the line, with green hands and with time and the elements against them, seldom have men triumphed over such overpowering odds.

Canada was primarily an agricultural nation and had no great supply of mechanically minded men to draw upon. Men who literally had never seen airplanes and stood in awe of them were taken from farms, forests and coal mines and trained as aircraft mechanics.

With time at a premium there was no opportunity for research or careful investigation. So Canada had to cut and try—with green hands with unfamiliar equipment—as it went along.

There were many mistakes and it was tough going for a while, but from it has come one of the world's great air forces.

This article deals with the maintenance of the Kinner engines that power the Fleet Finch II primary trainers which are being flown day in and day out under the British Commonwealth Air Training Scheme.

An unusual operation record is being written with the hundreds of Kinner engines employed in Canada. In the first place, Canada has demonstrated, and it is now an official order, that all Kinners operate a minimum of 640 hours between overhauls, instead of the customary 480-hour period.

In effect, this 160-hour boost, which amounts to a 33 percent minimum increase, gives Canada an extra Kinner engine for every three in service. Canada has set no limit on the maximum time between overhauls. This is subject only to the discretion of the local engineer.

Canada has built up this efficient record through a long and arduous development and educational program. A new conception of the operation of aircraft engines under severe winter conditions had to be written and a well-trained personnel, capable of avoiding well meaning but harmful mistakes, had to be developed.

Many experimental cowlings, however, were tried by Fleet Aircraft, Ltd., in early installations of Kinner engines. One included five hoods that extended to the top of each cylinder head. Each hood had a door that could be opened and closed from the cockpit, with which the pilot could control the temperature of the engine.

What these doors actually did was to let all of the air flow around one side of the cylinder only, resulting in uneven expansion, with consequent operating difficulties and even piston seizures. In the correction of these difficulties the Kinner service staff worked in close cooperation with the engineering branch of the RCAF and with Fleet.

It was found that any unnatural

(Turn to page 194)

Snow plows must often be operated for several hours every morning before runways are clear enough for training.

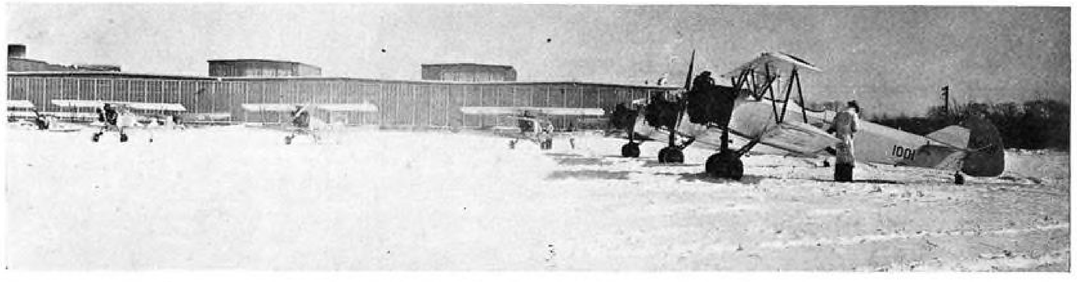

Typical winter day at a Canadian training base, with Kinner-powered Fleet-Finch II's on the line.

More Flying Per Day For Airline Planes

Maintenance men are contributing greatly to national defense because they are making it possible to get more intensive use of airplanes than ever before in history. Airlines have fewer planes than are actually needed, but maintenance crews have speeded up their methods and by working around the clock are keeping air transports flying steadily throughout the country. Never before has airline maintenance been more important.

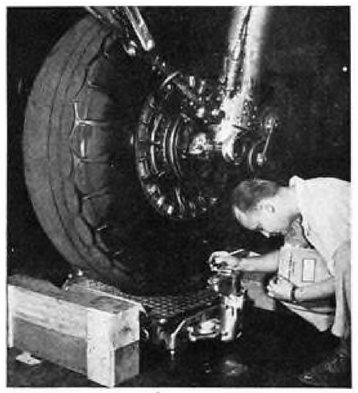

TWA's weight engineer Kirk Raynesford weighs the Stratoliner with two 15,000 lb. scales plus a suspended tail scale.

Northeast Airlines developed this field cart which has an automatic brake that operates as soon as handle is released.

Busy Joe Martin of American Airlines maintains the largest fleet of transports of any line in the world.

Doc Anderson of Chicago & Southern is proud these days of the brand new base at Memphis.

Newest large hangars in the country are at Washington, D. C. At present Eastern and Penn Central are sharing this hangar but soon each will have large space and American will also occupy a hangar. Penn Central is already moving its base from Pittsburgh to Washington.

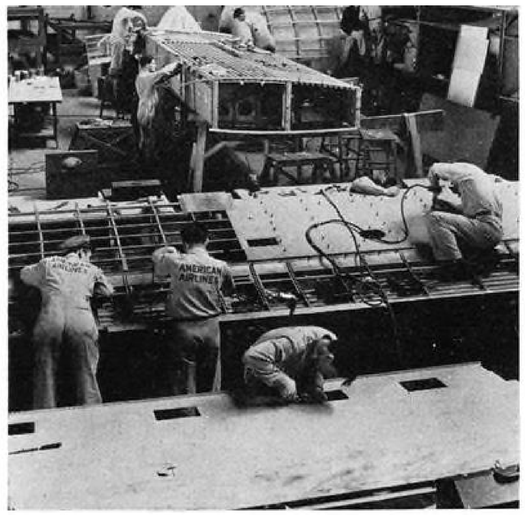

American Airlines has developed a new maintenance dispatch system by which servicing is carried on whenever airplanes are on the ground. Major overhauls are done at the LaGuardia base, shown here. A DC-3 is getting a thorough going over.

United Air Lines has always been a leader in communications. This is a test panel in the new radio-electric shop at Cheyenne. Bendix DF tester in foreground.

James T. King, Western Air Lines maintenance superintendent, has worked out with United Air Lines the only complete interchange of airplanes now being used between two lines.

Trans-Canada is more than an airline these days. Its maintenance base in Montreal and shops elsewhere overhaul propellers, instruments and accessories for the Royal Canadian Air Force.

At Delta's new shops in Atlanta C. P. Lyle makes plaster molds from which sheetmetal parts will be drop hammered.

H. F. Clarke keeps Inland's fleet of Boeings operating smoothly between Cheyenne, Great Falls and Huron.

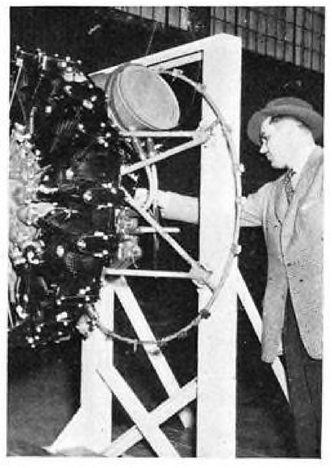

Newly appointed maintenance superintendent for All American Aviation is Edward D. Musser. Base is at Pittsburgh. The line operates a fleet of Lycoming-powered Stinson Reliants and has been sending engines to factory for overhaul. Beginning immediately, under Musser's direction, line will do all engine work.

Continental at Denver has much new equipment. Here R. C. Johnson, engine shop foreman, operates a piston ring lapping machine built here. An air-operated reciprocating piston rotates through a 40 deg. arc each stroke. Machine stops after set number of strokes.

The Birdmen's Perch

We've come to the conclusion that our public can't take it. First they were clamoring for really tough problems. So we ran them. Then what happens? The fellows who had been doing most of the yelling fold up and silently steal away. Only a few hardy souls, such as the fellow below, can answer those stickers. Shall we go back to diaper-days problems, boys?

Major Al Williams, alias, "Tattered Wing Tips,"
Gulf Aviation Products Manager, Gulf Bldg., Pittsburgh, Pa.

WOOING THE MUSE DEPT.

There's something about a plane that moves more people to poetry! Here's the latest to reach our desk. It's from Miss Bonnie Walters of Omaha, Nebraska.

The plane in the hangar stretched its wings,
And gave a mighty yawn,
He thought as he wriggled his piston rings,
My, what a beautiful dawn!

He partook of his breakfast of gasoline,
And out on the runway he rolled,
Then, glancing to see if his face was clean,
Up into the air he strolled.

He impolitely scared a tree,
By zooming far too low,
Then looking up, what did he see!
It brought him grief and woe.

For soaring high above him,
He saw his girl friend, Jane,
She was acting coy with Tailspin Jim,
Oh, it gave him a pain.

So up he went with a mighty roar,
And knocked Jim in a spin,
He watched him hit the floor
And then, took Jane back down with him.

Jane thought that he was wonderful,
And softly rubbed wing tips,
She praised him till the little plane's heart,
Was doing backward flips.

The little plane was very gay,
His head was in a cloud,
Then he and Jane went off to play.
They both were very proud.

THIS MONTH'S BRAIN TWISTER

Robert Smith, of Hamilton, Ontario, is one of the fellows who thinks our "tough" problems are just sissies. So he sends in one of his own. What can you do with it?

A flying hunter took off and started to fly due South. After he had traveled 100 miles he had seen nothing, so he turned and flew due East. At the end of 100 miles he spotted a bear on the ground so he landed and shot it. He then took off again and flew 100 miles back home. What was the color of the bear? (Ouch!)

IT PAYS TO BE CRITICAL

A great author once remarked that good literature often depended upon a man's ability to cut his own writing ruthlessly. The man, who could go through his own brain child, remove *every* extraneous word —*he* would have something worthwhile when he got through!

We use the same system in producing Gulfpride Motor Oil. We are constantly

critical of this oil. We are never satisfied with removing just enough impurities from it. We go even further and by a special process of refining—the Alchlor Process—we remove *more* of the carbon and sludge-formers that often can be so costly to an airplane engine. We think the success of Gulfpride Motor Oil proves that it pays to be mighty critical—especially of your own products!

WHOPPER OF THE MONTH

Dear Major,

I operate a loop-o-plane in a carnival. Maybe you've seen a Loop-o-plane. They're little four-seated buckets that whirl around on a pole. A motor revolves the pole.

Well, one day I was cleaning up the motor, waiting for the evening trade to start, when quite by chance I spilled a little G.A.G. on

the motor—you'll notice I said *on* the motor. Just then a customer appears so I hop down and sell him a ride. Well, I no sooner touch that switch and turn my back than the danged thing whirls around twice and shoots the car up to substratosphere levels. After it circles it heads west at four hundred m.p.h. and disappears. Not having heard of a preceding similar situation, I set down to think and darned if after half an hour it doesn't zoom over the roller coaster and make the prettiest hook-on landing on its whirligig.

After the passenger recovered he filed suit for twenty grand, which just cleaned out my Irish sweepstake winnings. I was going to sue G.A.G. for underrating their products but I got a ten-year mail contract flying round trips to Mandalay.

Hey, this straight-jacket doesn't fit!

Sincerely yours,
R. M. R.



Gulf Oil Corporation and Gulf Refining Company . . . makers of

GULF AVIATION PRODUCTS

The essential margin of superiority that wins a war is necessarily the sum total of many component parts.

Value of the precise workmanship, long experience and unstinted care which the men of OHIO Seamless concentrate on the production of OHIO Quality Seamless Aircraft Tubing is best judged by performance of American built ships as they deliver their bomb loads - straight to the target.

Photo by courtesy of DOUGLAS AIRCRAFT COMPANY, INC., SBD Dive Bomber for U. S. Navy and Marine Corps

CHROME MOLYBDENUM FOR STRENGTH LIGHTNESS AND SAFETY

The OHIO SEAMLESS TUBE CO.
OHIO SPECIAL QUALITY
Thelby, OHIO

Mass Maintenance Methods

With 598 men servicing over 256 airplanes, this story of Chief Kidder's shops is especially noteworthy.

By Charles "Chief" Kidder, *Service Manager and Superintendent, Grand Central Air Terminal Engineering Officer, Cal-Aero Academy*

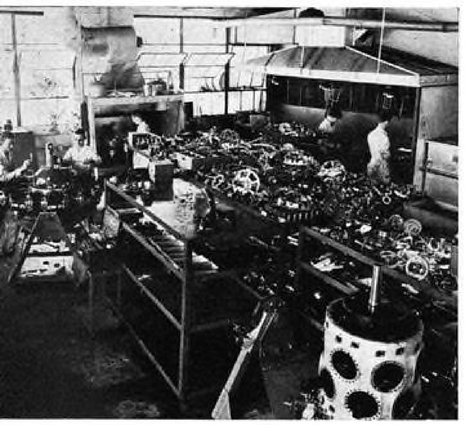

Left: engines are received and torn down in Plant 1.

WITH every aircraft, aircraft engine, and aircraft accessory factory in the country straining to expand production to new records it is growing apparent that the biggest headache in the whole aviation industry before long will be the mass maintenance of all this equipment. This maintenance problem has developed first in the field of military pilot training and from this experience of servicing and maintaining trainers we can learn a great many lessons of value to all branches of maintenance work. The heavy end of the maintenance load fell on the training program because of the relatively greater volume of training planes which have been built to date, the intensive operation to which they have been subjected, and the abuse which has been handed to them by our embryo pilots.

Our organization maintains a total of 256 military planes, including spare engines, plus a heavy volume of commercial maintenance work. It is our job to maintain all the flying equipment operated by the several schools directed by Major C. C. Moseley, including the Cal-Aero Academy, Polaris Flight Academy, Mira Loma Flight Academy, and the commercial and Army business of Aircraft Industries Corp. We maintain more airplanes than any one commercial airline in the world. Including service crews at our four major operations centers we have a total of 598 men actively engaged in service and maintenance work. Of this number 46 men are assigned to strictly commercial maintenance work. Our operations are centered in two shops having a total floor area of about 25,000 sq. ft. and equipped with every tool and machine needed to do work to meet factory standards. We operate as a fully approved CAA Repair Station and must do all military work to meet military specifications and technical orders.

(Turn to page 176)

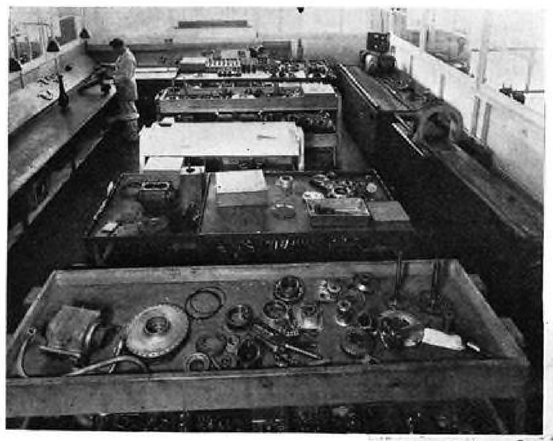

Left: inspection department with Magnaflux in far right corner. All racks are movable.

Right: final assembly at Plant 1, with parts racks on left. Engine stands permit engines to be locked in horizontal or vertical position. Tools are quickly reached from benches at right.

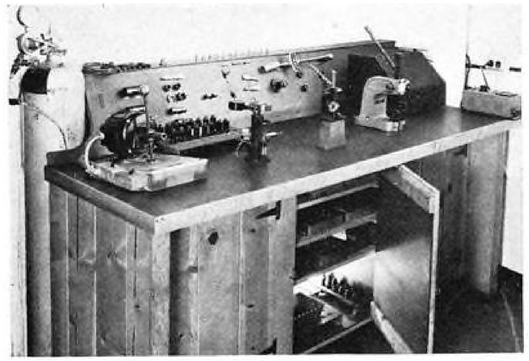

Bench for disassembling, testing and storing sparkplugs at Plant 1.

Accessory shop for magnetos, carburetors and ignition, Plant 1.

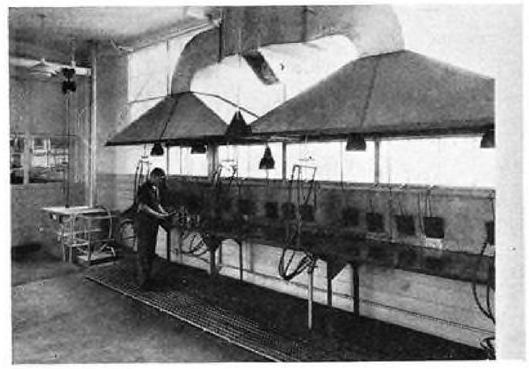

Degreasing and parts cleaning spray bench at Plant 2, Ontario, Cal.

Cold solvent cleaning tanks. This and remaining photos are Plant 2.

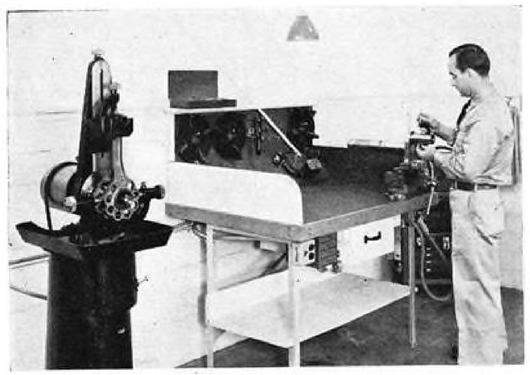

Master rods are bored easily and accurately in machine at the left.

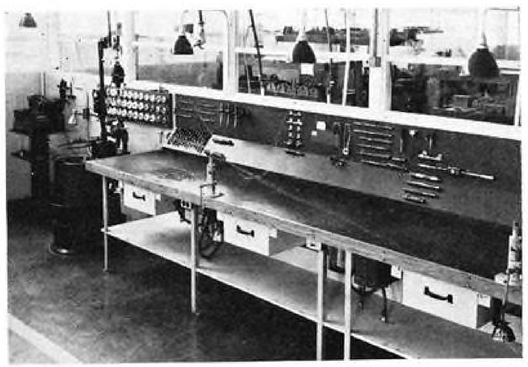

Hall eccentric cylinder grinding machine at left, and cylinder bench.

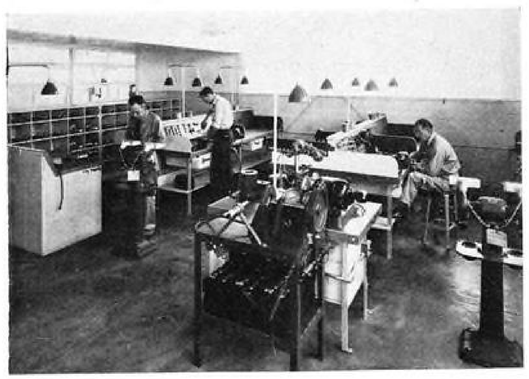

All standard accessories on training ships can be checked here.

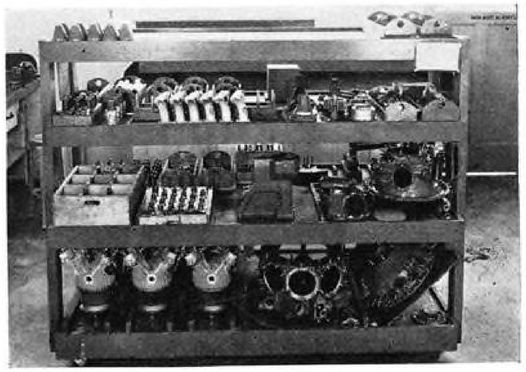

Movable rack showing cleaned and inspected engine parts.

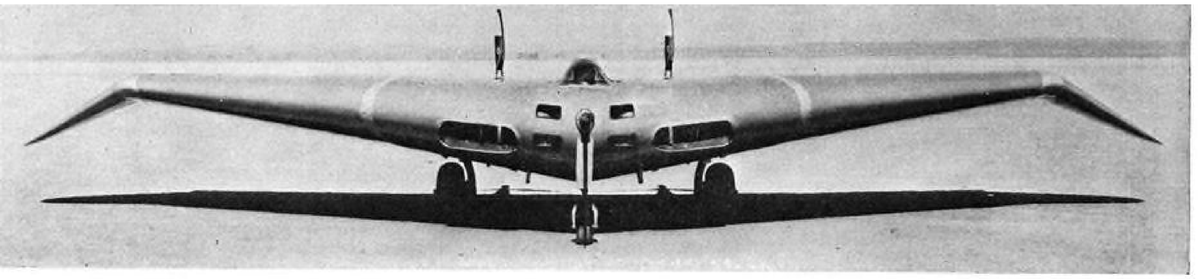

The Northrop "All-Wing" Airplane

By John K. Northrop, *President, Northrop Aircraft, Inc.*

IN an article appearing in AVIATION magazine in March, 1930, the writer described the first Northrop flying wing airplane to be given full scale flight tests. At that time the tests had been conducted over a period of a year and a half with excellent success. Recently a considerable amount of interest has been shown in tests which have now been in progress for a period of more than a year on an all-wing type plane of even more advanced design than that earlier model. As a result of the experience gained in designing and testing these two airplanes of radical type and the same general family, it is now possible to say that we are on the threshold of volume production of airplanes of the flying wing type. And it is not too much to say that this new family of airplanes, adaptable to almost all types of military and civil aircraft, will have a profound influence on all airplane design and on accepted performance standards.

The idea back of the designer's dream of an "all-wing" airplane is as old as bird flight itself. Birds in flight, and especially soaring birds, present a body in which non-lifting elements are suppressed to a high degree. It has been the goal of airplane designers to produce a plane in which every part exposed to the airstream would contribute to the lift of the machine in return for the drag caused. This effort has produced the cantilever monoplane, now almost universally accepted as a wing system of superior efficiency. And coupled with the development of the cantilever monoplane has been the perfection of the retractable landing gear in an effort to reduce waste drag. But we have still been faced with the problem of the fuselage, tail control and stabilizing surfaces, and engine nacelles. Experiments have been under way looking towards the elimination of nacelle drag through burying engines completely inside the wing. But the only hope for elimination of fuselage and tail drag has been to somehow "swallow" them into the wing.

Modern designers, including the writer, can claim no monopoly on the "flying wing" idea. Lippisch, in Germany, and Hill, in England, are among the designers who have built successful tailless planes. Even the first Wright biplane must be considered in this category in spite of its multiplicity of struts and wires, for it had no fuselage, carried the powerplant and pilot directly on the wing system, and was controlled longitudinally by a front elevator which was in fact a lifting wing surface.

But in all such craft developed in the past there has been a certain amount of parasite drag resulting from exposed fuselage and control surfaces so that full advantage was not taken of the flying wing principle. In the latest Northrop design there is no fuselage and no use of external fins, rudders or other aux-

(*Turn to page 184*)

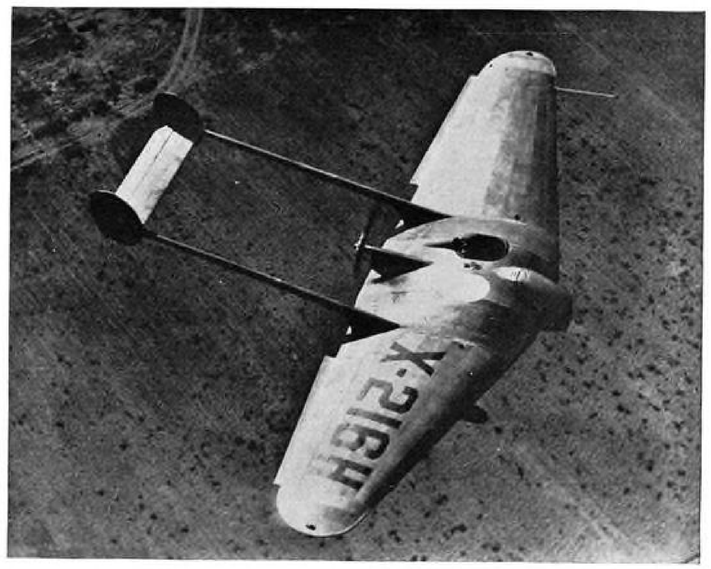

The first Northrop wing, initiated in 1923 and first flown in 1928. Unlike the later wing this early model had movable tail controls on outrigger booms and but one engine.

Here is the inside story of the development of the Northrop "all-wing" airplane as told by the designer himself, John K. Northrop, President, Northrop Aircraft, Inc.

Jack Northrop is a unique figure in the field of aviation engineering. Perhaps no other designer has played such a vital part in such a wide range of aviation developments. Associated with Allan Lockheed in the early days of "after-the-war" aviation development, Jack Northrop designed the famous Lockheed "Vega" monoplane, the first successful commercial plane with monocoque fuselage. Through later associations with the United Aircraft Corp. and with Douglas Airplane Company he participated in the design development of the family of transport planes which has been accepted as standard throughout the world. All modern stressed-skin metal airplanes follow the pioneering work done by Jack Northrop in design and construction of the 1928-30 Northrop Flying Wing, which was of stressed skin, multicellular structure. His own Northrop Alpha, Beta, Gamma, Delta and A-17 attack plane also proved the stressed skin structure in notable speed and long-range flights throughout the world.

Jack Northrop was the first to apply the split trailing edge flap to a modern plane and to demonstrate its practicability.

With development of the "all-wing" plane which completely eliminates external control surfaces Northrop has achieved a goal long sought by aircraft designers. This feature, taken with other phases of the flying wing development, may well revolutionize all airplane design.

In the field of structures, with the multi-cellular stressed skin construction; in the field of control, with the split flap and the elimination of external controls; and in the general field of aerodynamics, through the development of the successful "all-wing" plane, Jack Northrop has contributed radical and revolutionary developments which stamp him as a unique figure in the world of aircraft design.

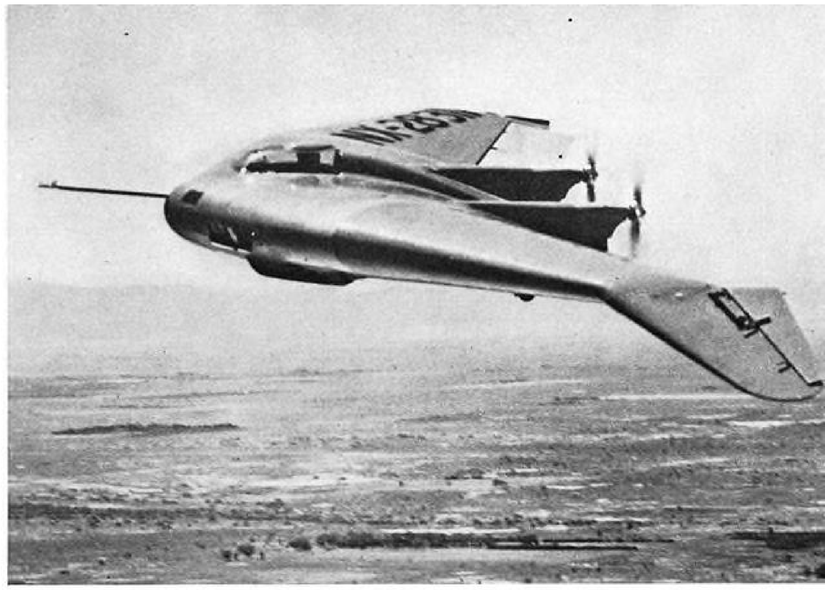

This flight view shows details of the drooping wing tips which provide rudder action. Pilot is said to have excellent visibility in this model although the designer states that on larger ships cockpit might be moved still farther forward.

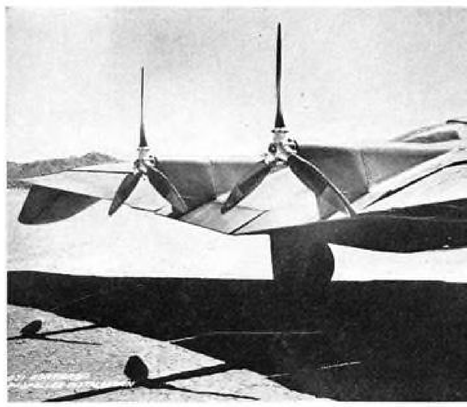

View at the right shows close-up of extension shafts that drive propellers from the buried engines. The "elevons" serve as both elevators and ailerons.

Another view showing air intake openings in leading edge of wing is at the bottom of the page.

Pilots and ground crew of the mystery ship kept it secret for over a year after first flight.

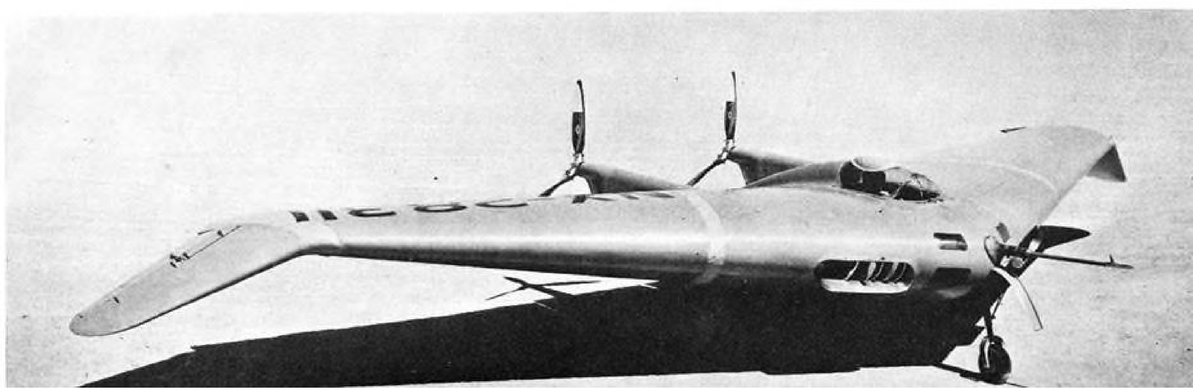

FOR MILITARY AND COMMERCIAL AIRCRAFT

U·S·S Carilloy Alloy *Aircraft Quality* Steels for use in airplane parts, engines and accessories not only are manufactured with special care, but such steels are put through a gauntlet of exhaustive tests and inspections that assure their compliance with your specifications for aircraft construction.

To safeguard the making, shaping and processing of "*Aircraft Quality*" steels and to ensure their successful application, we supplement the patient work of competent metallurgists and steel makers with adequate and expanding production facilities and capacities and with unexcelled research and technical equipment.

Our many years' experience in producing fine alloy steels for the Automotive, Implement, Petroleum and other vital industries is evidence of our ability to produce Aircraft Quality Steels that will assure consistently economical fabrication and dependable performance.

U·S·S CARILLOY ALLOY STEELS

CARNEGIE-ILLINOIS STEEL CORPORATION
Pittsburgh and Chicago

Columbia Steel Company, San Francisco, *Pacific Coast Distributors*
United States Steel Export Company, New York

UNITED STATES STEEL

"Teamwork For Production"

By Robert Monroe, *Director of Purchasing, North American Aviation, Inc.*

SPURRED by the deepening war crisis, our government has asked industry to perform a "miracle of production." We are told that our efforts must be so intensified as to double, triple, or even quadruple the volume of tanks, planes, and war weapons flowing to the battlefields.

For the young aviation industry this demand has been particularly difficult. In 1941 we have expanded production of American war planes to ten times what it was only three short years ago. Yet, on top of one miracle we are urged to perform still another and increase our production to 20 times what it was before the war emergency developed.

The reason is obvious. The military airplane is the spearhead of modern warfare. It is the sharp point which drives to the vitals of enemy resistance and opens a way for older and slower methods of combat. Air power is the vital factor in our formula for victory and so we must produce airplanes at a speed never before thought possible.

If this miraculous feat is to be performed it will be achieved only through the miracle of teamwork which will make it possible for the aviation industry of this country, in cooperation with government and with other industries, to make use of existing tools,



facilities and reservoirs of skilled workers, to achieve the maximum immediate result in expanded production without having to wait for the completion of new factories, the construction of new machine tools, and the training of new men. One formula for such a cooperative effort is sub-contracting. By breaking down the complete airplane into the maximum number of component parts and items of equipment, we are able to spread the manufacture of such items throughout the industrial life of the entire nation.

But sub-contracting has two sides. There are obvious advantages to the scheme of spreading our production problem, and there are some serious disadvantages, not all of them obvious. To overcome these difficulties we must rely on the miracle factor in our formula, the human element of teamwork and cooperation with each other in order to achieve a common, supreme purpose.

Immediate expansion of production is the major advantage of sub-contracting. Theoretically it is possible to allocate almost half of the work of building an airplane to plants which have previously been engaged in other work. Thus we would simply send production blueprints and specifications, along with a contract specifying the number of parts required, date delivery is required, and amount we will pay for the work, to a factory which was not too busy with other work to undertake our parts order. This might be a manufacturer of automobiles, refrigerators, or radios. It might be an independent machine shop, an accessory manufacturer or a toy maker. The theory of marshalling hundreds of such shops into an army of aircraft parts producers is an attractive one. It is easy to picture an overnight expansion of the aircraft production effort. Our imagination leaps to the possibility of a great host of such plants feeding in parts and assemblies to a few central aircraft assembly centers out of which roll the completed planes for our military services.

And there are other points favoring sub-contracting. As we gear our industrial effort to war needs there occur inevitable dislocations. Priority control of essential materials cuts down employment in many industries that have been producing for peace-time needs. Workers are laid off and whole towns suffer an economic blight if no war work is immediately available for the plants formerly engaged in non-defense production. Extension of sub-contracting offers a method of counteracting this economic dislocation. By sending orders for aircraft parts to areas formerly engaged in civilian production work it is possible to avoid the social and economic ills resulting from migration of workers from one area to another. Local merchants and business institutions, local schools and civic organizations, local labor, industry and political procedures are all maintained on an even keel. It is quite obvious that the benefits of an efficient sub-contracting program are of basic importance to the whole nation, as well

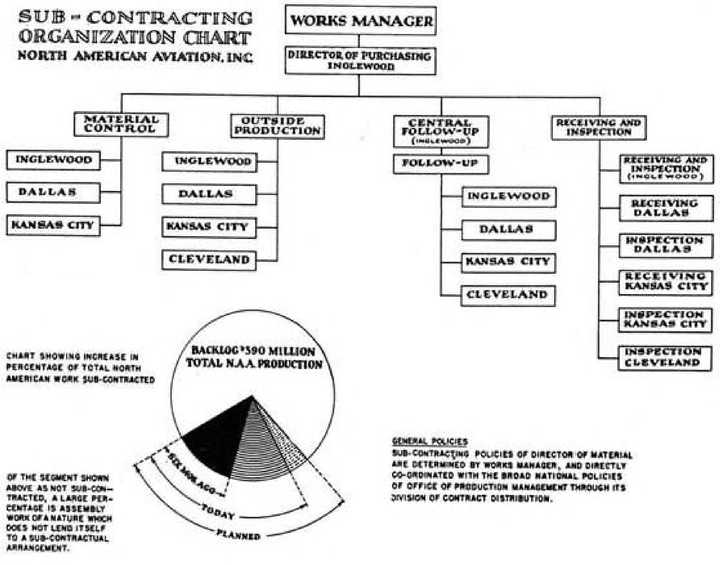

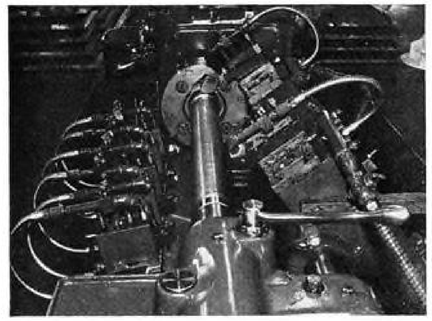

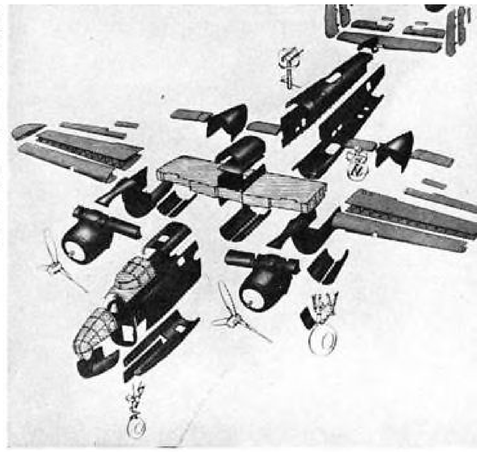

Multiple gang cutting tool set-up on lathe work which is operating on a hydraulic cylinder in the North American plant. Such tooling is difficult to find among sub-contractors except in the automotive industry.

medium bomber showing sub-contracted parts. Dark and light-shaded areas are parts and assemblies made by Fisher Body Div. of General Motors. White areas indicate parts sub-sub-contracted by Fisher—landing gears, propellers, gun turrets. The only parts built and assembled in North American's Kansas City factory are shown cross-hatched.

as being of paramount importance in securing immediate stimulation of our production effort.

But like every good thing in life, this sub-contracting scheme is not to be successfully accomplished by over-night, spur-of-the-moment action. We have succeeded to date because we have proceeded step by step, through a process of trial and error education, and with the close cooperation of everyone concerned. There have been many major problems to face. It is not at all easy to find plants that are capable of making aircraft parts to the required precision standards. Even the materials used in airplane manufacture, such as magnesium and aluminum alloys, are strange to most available shops. So we have had to conduct a very thorough program of investigation of all prospective sub-contract plants. We have had to study financial and labor background as well as the physical shop facilities and the availability of trained craftsmen. We have to allow for the possibility that a sub-contracting plant might experience financial failure while in the midst of executing an important contract. And it is possible that some labor trouble in a small plant, remote from our assembly lines, would rob us of important parts at a critical time. So we must do an intelligent job of "qualifying" all firms who enter into our sub-contract team. And once associated together in the production effort, we have to seek the utmost cooperation with all such plants in order that our flow of parts may be efficient and uninterrupted.

Following selection of a sub-contractor we have many mutual problems. His employees must be trained to understand all the special problems of producing parts for us. This involves tooling, jigs and fixtures, inspection, etc., and is in itself an important and time-consuming operation.

As we shift the production of parts and assemblies to sub-contractors we face a major problem in providing a sufficient stock of such parts to keep

(Turn to page 96)



Bottom and top fuselage sections ready for the master fuselage jig. Breakdown of this type permits a great deal of sub-contracting.



Many machined parts, such as this massive part shown in a boring set-up, suit themselves to sub-contracting in small machine shops.



Another of the many sub-assembly parts which may be farmed out.



Engine nacelles are formed in several sub-assemblies which also may be handled by sub-contractors.

THIS IS AN EXAMPLE OF THE DEPARTMENTAL LOAD STUDIES WHICH DETERMINE THE AMOUNT OF WORK TO BE SUB-CONTRACTED

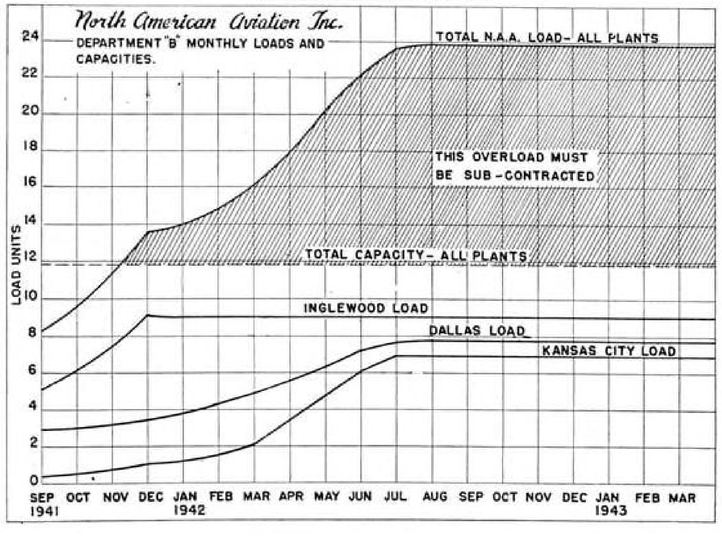

NORTH AMERICAN AVIATION'S "B-25" BOMBER —— *is Equipped with*

"NORMA-HOFFMANN" PRECISION BEARINGS

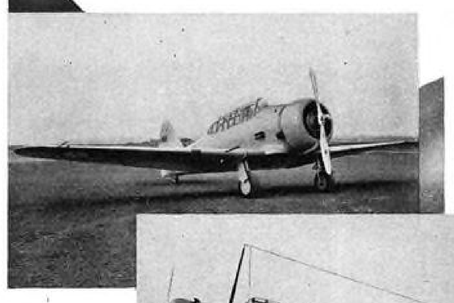

These earlier North American Aviation Models —NA-49 and BT-9 Trainers—were featured in previous Norma-Hoffmann advertising.

NORMA-HOFFMANN BEARINGS CORPORATION congratulates North American Aviation, Inc. upon its noteworthy achievements — in which NORMA-HOFFMANN has been privileged and honored to participate by supplying PRECISION BEARINGS for the controls of the various North American Aviation models.

NORMA-HOFFMANN pledges its utmost continuing effort to the emergency defense activities of North American Aviation, Inc. and of the entire aircraft industry.

As pioneers, identified with the aircraft industry since its earliest days, NORMA-HOFFMANN takes pride in the fact that practically every representative American builder of aircraft, engines, instruments and aviation equipment (including the U. S. Government) employs NORMA-HOFFMANN PRECISION BEARINGS. This extensive use in the aircraft field is recognition of their excellence of design, materials and craftsmanship, and of their unfailing dependability.

BALL, ROLLER AND THRUST BEARINGS

NORMA-HOFFMANN BEARINGS CORP'N., STAMFORD, CONN., U.S.A. • FOUNDED 1911

Teamwork

As North American patriotically points out, *Teamwork* in Aviation will bring Victory. ADEL DESIGN SIMPLICITY assures *Teamwork* between ADEL Technicians and Engineers thruout the Industry— *Teamwork* in expediting production coordination— *Teamwork* thru simplified field servicing and maintenance— *Teamwork* thru consistent and dependable operation from the Arctics to the Tropics.

* * * * *

ADEL manufactures over 3,000 sizes and types of line supports, hydraulic control valves and general hydraulic units, anti-icing pumps and controls, synthetic rubber products, allied aircraft proprietaries.

ADEL

PRECISION PRODUCTS CORP.
10777 VAN OWEN STREET, BURBANK, CALIFORNIA
EASTERN SALES ENGINEER · J. HENRY REISNER · HAGERSTOWN, MD.

North American Aviation, Inc. has been dedicated to national defense since its birth. In this emergency its responsibilities are as direct and vital as those of the military forces. In the line of production duty, North American engineers pioneered the breakdown of bulky airplane components into small assemblies, thus permitting extensive sub-contracting of such parts and assemblies. So today we take pride in saluting 921 sub-contractors throughout the nation who are making a mighty contribution to the all-out production of North American Bombers, Fighters and Trainers.

J. H. Kindelberger *President*

NORTH AMERICAN AVIATION, INC.

DALLAS, TEXAS ★ INGLEWOOD, CALIF. ★ KANSAS CITY

"Teamwork" is the Call to Victory

BELOW IS THE HONOR ROLL of 921 firms who h
production of parts, materials and sub-assemblies fo
Working as a team, their cooperative efforts insure
their hundreds of thousands of employees go the pra

CALIFORNIA

A.A.A. Cabinet Mfg. Co.
Abarost Mfg. Company
Abbey Sick Room Supply Co.
Abbott Bros.
Abbott Laboratories
Abco Metalcraft Company
Abegg & Reinhold Co., Ltd.
Abrasive Sales & Service Co.
Ace Sheet Metal Works
Ace Stamp & Stencil Co.
Ace Tool & Engineering, Inc.
Acme Bag & Twine Company
Acme Blower & Pipe Co.
Acme Electric Welder Co.
Acme Kling Tite Company
Acme Metal Die & Stencil Works
Acme Pattern & Foundry Co.
Acme Saw Works
Acme Steel Company
Acme Wiping Rag Company
Adams & Riddle
Addressograph Company
Adel Precision Products
Adler Brush Mfg. Company
Advance Paper Box Co.
Advance Saw Works
Aero Corporation
Aero Alloys Inc.
Aero-Coupling Corporation
Aero Electric Corporation
Agfa Ansco Corporation
Air Associates, Inc.
Airesearch Manufacturing Co.
Aircraft Accessories Corp.
Aircraft Industries, Inc.
Aircraft Plating Company
Aircraft Precision Products, Inc.
Aircraftsmen, Inc.
Aircraft Specialties Corp.
Aircraft Tool & Supply Co.
Aircraft Tool, Inc.
Air Reduction Sales Co.
Airsupply Company
Alemite Lubricator Co.
Alhambra Foundry
Allegheny Ludlum Steel Corporation
Allied Industries, Inc.
Allied Supply Company
Allis Chalmers Mfg. Co.
Alloy Steel & Metals Co.
Aloe, A. S. Company
Aluminum Alloy Casting Co.
Aluminum Co. of America
American Aircraft Radio Co.
American Brass Company
American Cable Company
American Can Company
American Concrete & Steel Pipe Company
American Cyanamide & Chemical Company
American Forge Company
American-La France & Foamite Corp.
American Paper Company
American Saw & Knife Works
American Seating Company
American Window Glass Company
Anchor Packing Company
Anchor Post Fence Co. of California
Andrews Hardware & Metal Company
Angelus Steel Treating Co.
Angelus Sanitary Can Co.
Angelus Paper Box Co.
Automatic Vise Sales Co.
Arrowhead Rubber Company
Arrow Brass Foundry, Inc.
Atlas Plating Company
Austin Company, The
Atchison, Topeka & Santa Fe Railway
Aviation Parts, Inc.
Aviation Supply Company

Baash-Ross Tool Company
Baker Oil Tools, Inc.
Bakewell Mfg. Company
Barnard Engineering Co.
Bay Cities Typewriter Shop
Bemis Bros. Bag Company
Berlin & Russell
Berry Bros.
Best, Jack, Mfg. Company
Binks Mfg. Company
Blackman, H. F. Machine Co.
Braun Corporation
California Gauge & Equipment Company
California Spring Co., Inc.
California Steel Treating Co.
California Wholesale Electric Company
California Wire Cloth Co.
Cannon Electric Company
Carbide & Carbon Chemicals Corp.
Carborundum Company
Cash Wholesale Tobacco Company, Inc.
Central Stationery & Printing Company
Century Metalcraft Mfg. Co.
Chansior & Lyons Stores, Inc.
Chase Brass & Copper Co., Inc.
Chicago Pneumatic Tool Co.
City Wire & Iron Works
Clark, C. N. Iron Works
Clark Tructractor
Cleveland Pneumatic Tool Company
Coast Centerless Grinding Co.
Collins-Powell Company
Colson Equipment & Supply Company
Columbia Steel Company
Commercial Iron Works
Compton Metals, Inc.
Consolidated Aircraft Corp.
Consolidated Steel Company
Cook Heat Treating Corp.
Cork Insulation Co.
Crane Company

Dearborn Chemical Co.
Die Cast Corporation
Dieterich-Post Company
Dietzgen, Eugene Co.
Dill Manufacturing Co.
Ditto Sales & Service Agency
Dix Manufacturing Company
Douk Aircraft Co., Inc.
Drayer & Hansen, Inc.
Ducommun Metals & Supply Company

Eastman Kodak Company
Eccles & Davies Machine Co., Inc.
Economy Blue Print Co.
Electric Vacuum Cleaner Co., Inc.
Emsco Asbestos Company
English & Lauer
Essig Company, Ltd.

Fafnir Bearing Company
Fairbanks Morse & Company
Farrar Industrial Products Company
Fearless Camera Co., Inc.
Federal Bearings Co., Inc.
Felt & Tarrant Mfg. Co.
Fibreboard Products, Inc.
Fischer, Chas. Spring Co.
Firestone Tire & Rubber Co.
Flex-O-Tube Co.
Foamite-Childs Corp. of California
Formica Insulation Co., Inc.
Frese, Adolph, Corp.
Frey Industrial Supply Co.
Fuller, W. P. & Company
Fulton Syphon Company
Fyr-Fyter California Co.

Garlock Packing Company
Garrett Supply Company
Gasket Mfg. Company, The
General Chemical Company
General Electric Company
General Fireproofing Co.
General Metals Corporation
Gillfillan Bros., Inc.
Gillette Machine & Tool Co.
Glidden Co., The
Goddard-Jackson Company
Gould Storage Battery Corp.
Graham-Reynolds Electric Co.
Graybar Electric Company
Grimes-Stassforth Stationery Company

Haas-Baruch & Company
Haddon, A., Company
Hadley, Chas. B. Company
Hammond Lumber Company
Harron, Rickard & McCone Company
Hartwell Aviation Supply Co.
Hartwell, Robt. M. Co.
Harvill Aircraft Die Casting Corp.
Hendrie, W. C. & Co., Inc.
Henes-Morgan Machinery Co.
Henger-Seltzer Company
Hitchens, Kenneth
Holister Coil Spring Mfg. Co.
Hoover Ball and Bearing Co.
Independent Pneumatic Tool Company
Ingersoll-Rand Company
Inglewood Lumber Co.
Inglewood Sheet Metal Works
Ingram Paper Company
International Business Machines Corporation
Interstate Aircraft & Engineering Company
Irving Air-Chute Co., Inc.

Jamison Steel Corporation
Jeffries Transformer Co.
Johns-Manville Company
Jones, Frank E. Machinery Corp.
Jones, W. H. Lumber Co.
Joslin Lumber Company

Kennedy Name Plate Co.
Keystone Tool & Supply Co.
Keystone Engineering Co.
Keuffel & Esser Co.
King, Irving G. & Co.
Kinney Aluminum Company
Kinney Iron Works
Kirkhill Rubber Company
Kirk, Morris P. & Son

La Moree, C. D.
Latex Seamless Products
L & F Machine Company
Leach Chemical Company
Leach Relay Company
Leahy, Dave
Lear Avia of Calif., Inc.
Lemen Lumber & Supply Co.
Libbey-Owens-Ford Glass Co.
Lights, Inc.
Linde Air Products Co.
Listenwalter & Gough, Inc.
L'Hommedieu, Chas. F. & Sons Company
Los Angeles Chemical Co.
Los Angeles Desk Company
Los Angeles Fireproof Door Company
Los Angeles Heavy Hardware Company
Los Angeles Ladder Co.
Los Angeles News Company
Los Angeles Parkersing Co.
Los Angeles Stamp & Stationery Company

Machinery Sales Company
Machinists' Tool & Supply Company
Madill, Inc.
Magnesium Products, Inc.
Maltby, Edw. D., Co.
Mallory, P. R. & Co.
May Company, The
Mckesson & Robbins, Inc.
Mckinney Blue Print Corp.
McMahan Bros.
Mechanical Foundries, Inc.
Mefford Chemical Company
Mellus Bros. & Co., Inc.
Meyer Machinery Company
Mid-State Company
Miller-Bryant-Pierce Co.
Mills Iron Works, Inc.
Minnesota Mining & Mfg. Co.
Modern Die & Stamping Co.
Modern Plating Co.
Moore Machinery Co.

National Carbon Co., Inc.
National Carloading Corp.
National Dry-Ice Corp.
National Lead Company
New Plastics Corporation
New Departure Mfg. Co.

Oakite Products, Inc.
Olmsted Mfg. Company
Osborne, Raymond G. Co.
Owens-Parks Lumber Co.

Pacific Abrasive Supply Co.
Pacific Aviation Inc.
Pacific Airmotive Corp., Ltd.
Pacific Ball Bearing Co.
Pacific Bearings Company
Pacific Coast Brush Co.
Pacific Cut Washer Co.
Pacific Fire Extinguisher Co.
Pacific Hide & Leather Co.
Pacific Machine Tool Co.
Pacific Manifolding Co.
Pacific Metals Co., Ltd.
Pacific Pump Works
Pacific Scientific Company
Pacific Screw Products Co.
Paper Supply Company
Patten-Blinn Lumber Co.
Paulis Plastics Company, H.
Peterson, F. Somers Co.
Pierson Machine Company
Phillips, Wm. E. Company
Plomb Tool Mfg. Company
Plumbing & Heating Supply Company
Pisweve Mfg. Company
P.K.S. Tool & Mfg. Co.
Pitney-Bowes Postage Meter Company
Poulsen & Norden Tool & Die Works
Product Engineering Co.
Pure Carbonic, Inc.
Purolator Products, Inc.
Pyrene Mfg. Company
Pyroil Co. of Los Angeles

Quality Electric Co., Ltd.

Radio Products Sales Co.
Radio Supply Company
Radio Television Supply Co.
Remington-Rand, Inc.
Rickenbacker Mfg. Company
Rocky Mt. Steel Products, Inc.
Roebling's, J. A. Sons Co. of California
Rogers Pattern & Foundry Co.
Rubbercraft Corp. of Calif.
Russell Mfg. Company

S. & M. Lamp Company
Santa Fe Pipe & Supply Co.
Schatz Venetian Blind Co.
Schrader's, A. Sons
Schrillo Tool & Engineering Company
Schwabacher-Frey Company
Schwein Company, L. S.
Seabsard Coil Spring Corp.
Sears-Roebuck & Company
Sherwin-Williams Co. of California
Simonds Saw & Steel Co.
Simplex Rubber Stamp Div.
Singer Sewing Machine Co.
Sierra Rubber Company
Sierra Sanitary Mfg. Co.
S.K.F. Industries, Inc.
Smith Bros. Truck Co.
Smith-Emery Company
Snap-on Tool Corporation
Soister, E. L. Company
Solar Aircraft Company
Southern California Bag Co.
Southern California Disinfecting Co.
Southern California Gas Co.
Southern California Foundry
Southern California Safe Co.
Southern Calif. Stationers
Southern California Telephone Co.
Southern Pacific Railroad
Southwest Medical Supply Company
Sparkletts Drinking Water Corporation
Spray Gun Sales & Service Company
Square D Company, Inc.
Stationers Corporation
Standard Felt Company
Standard Fence Company
Standard Oil Company of California
Steel Products Eng. Co.
Sterling Electric Motors, Inc.
Sullivan Fence Company
Sun Lumber Company
Sutorbilt Corporation
Swedlow, Dave, Corp.
Swift & Company

Technical Products Co., Inc.
Texas & Pacific Railroad Co.
Thackaberry, M. C.
Thompson Glass & Paint Co.
Tibbetts-Westerfield Paint Company
Todd Sales Company, The
Tollar Mechanical Works
Trulove's Transfer
Turco Products, Inc.

Underwood-Elliott-Fisher Co.
Union Hardware & Metal Co.
Union Pacific Railroad
Union Transfer & Storage Co.
United Motors Service, Inc.
United States Bag & Supply Company
United States Flexible Metallic Tubing Co.
United States Gauge Co.
Universal Carloading & Distributing Company
Utility Electric Steel Foundry

Victor Belting & Rubber Co.
Victor Welding Equipment Company
Viking Pump Company
Vogue Composition Co.

Wabash Railway Company
Wallace, J. D. & Company
Wardrobe Linen Supply Co.
Warman Steel Foundry
Warner & Swasey Company of California
Warren & Bailey Company
Wagner Electric Corporation
West Disinfecting Company
Western Auto Supply Co.
Western Electric Company
Western Galvanizing Co.
Western Hardwood Lumber Company
Wiley Machine Co., Inc.
Wilson Paper Company
Westinghouse Electric Co.
Wolverine Tube Company

Yocum, Sam

Zellerbach Paper Company
Zonne Electric Tool Co.

ALABAMA

Ingalls Iron Works
Kilby Car & Foundry Co.

CONNECTICUT

American Brass Company
American Metal Hose Co.
American Tube Bending Co.
Billings & Spencer Co.
Bronson, Homer D., Co.
Corbin Screw Co.
Cuno Engineering Corp.
Colt's Patent Fire Arms Mfg. Co.
Chance-Vought Aircraft Co.
Chandler-Evans Co.
Chase Brass & Copper Co., Inc.
Eastern Machine Screw Corp.
Fafnir Bearing Co.
Hamilton Standard Propeller Division
Landers-Frary-Clark
Laminated Shim Co., Inc.
Lewis Engineering Co.
Manning, Maxwell & Moore, Inc.
New Departure Mfg. Co.
Norma Hoffman Bearings Corp.
Pratt & Whitney Aircraft Division
Rockeston Products Corp.
Stanley Insulating Co.
Seamless Rubber
Stanley Works,
Scovill Manufac
Torrington Co.,
United Aircraft Exp. Division
Veeder-Root, In
Vought-Sikorsky

DELAW

National Vulcan
Wilmington Fib
Specialty Co

ILLIN

Automatic Scre
Products
Abbott Laborat
Acme Industrial
Acme Steel Co
Adjustable Clam
American Chain
American Auton
Sales Co.
American Phenc
American Stock
Armstrong Bros
Aeros Controls
Automatic Screw
Askansis Regula
Bastian-Blessing
Bauer & Black
Barber-Colman
Belden Mfg. Co
Besley, Chas. H
Binks Manufact
Blohkan Aero M
Burgess, C. F.
Chicago & North
Chirans Metal P
Chicago, Milwau
St. Paul Rail
Chicago Rock Is
Chirago Screw C
Cornell Forge C
Crane Company
Dearborn Chemi
Dietzgen, Eugen
Fairbanks Morse
Felt & Tarrant M
Gaertner Scient
Ideal Commutat
Dresser Co.,
Illinois Central
Independent Pn
Tool Co.
Jones, Howard
Jefferson Electri
Kropp Forge Co
Kellogg Switchb
Supply Co.
Lenz Electric Co
L'Hommedieu, C
& Sons Co.
Littlefuse Labor
Leonard, G. B. &
Lange, Henry G.
Works
Lincoln Schleute
Mach. Co.
Mansure, E. L. &
Magnaflux Corpo
Micro Switch Co
Miller-Bryant-Pi
Ohmite Mfg. Co.
Onsrude Machin
Pyle National C
Pheoll Mfg. Co.
Quickwork, Co.,
Runzel Cord & W
Ryerson, J. T., &
Seaman Paper C
Shafer Bearing C
Stewart-Warner
Steel Sales Corp.
Shakeproof Lock
Sciaky Spot Wel
Speedway Mfg. C
Stewart Die Cast
Whitney Metal T
Wittek Manufact

INDIA

Adams & Westla
Allison Engineer
Aluminum Co. o

...TO BUILD WITH TEAMWORK IS

...in the Battle of Production

...have enlisted in national defense by their record ...r North American Bombers, Fighters and Trainers. ... victory in the Battle of Production. To them and ...ise and gratitude of North American Aviation, Inc.

...er Company
...The
...uring Co.
...The
... Corp.,
...
...
...y Aircraft Div.

...ARE
...ized Fibre Co.
...re
...pany

...OIS
...v Machine
...ries
...l Co.
...pany
...p Co.
... & Cable Co.
...natic Elec.
...
...lic Corp.
... Gear Co.
... Tool Co.
...
...v Products
...tor Co.
...g
...Company
...mpany
... & Co.
...uring Co.
...ffg. Co.
...Laboratories
... Western R.R.
...ftone Corp.
...ikee &
...road
...land R.R.
...Company
...mpany
...
...cal Co.
...e Co.
... & Co.
...Mfg. Co.
...ific Corp.
...or
...
... Railroad
...eumatic
...
...B., Co.
...ic Co.
...mpany
...ssurd
...
...
...
...Chas. F.
...
...atories
... Co., Inc.
..., Machine
...
...er Floor
...
... & Co.
...oration
...rp.
...erce Co.
...
...e Co.
...., The
...
... The
...Wire Co.
... & Son, Inc.
...o.
...Corp.
...Corp.
...
... & Washer Co.
...der Co.
...Co.
...
...ting Div.
...Tool Co.
...turing Co.
...
...NA
...
...ake
...ring Co.
...f America

MISSOURI
Airpath Instrument Co.
Baker-Lockwood Co.
Beites, A. O. Mfg. Co.
Builders Steel Co.
Bussman Manufacturing Co.
Curtiss-Wright Airplane Co.
Dierks & Sons
Elifeldt Hardware & Machinists Supply Co.
English Bros. Machinery Co.
Faeth Co., The
Gateway Chemical Co.
Inman Powell Co.
Kansas City Southern R.R.
Langdon Supply Co.
LaRue Printing Co.
Liepsner, H. C. & Co.
McKesson & Faxon Drug Co.
Mines Equipment Co.
Missouri & Arkansas R.R.
Missouri Pacific Railroad
Precision Screw Machine & Mfg. Co.
Ray-O-Vac Company
Richards & Conover Hardware Co.
St. Louis & San Francisco Railroad
Schooley Printing and Stationery Co.
Sewall Paint Co.
South-West News Co.

NEW JERSEY
Aircraft Radio Corp.
Air Cruisers Inc.
Air Associates Inc.
Aluminum Co. of America
American Gas Accumulator Company
American Oil & Supply Co.
Brewer Corp.
Barnard Mfg. Corp.
Celluloid Corp.
Coast Cable Co.
Curtiss-Wright Corp.
Dunlop, Wm. G., Co.
Dupont, E. I. De Nemours Company, Inc.
Elastic Stop Nut Corp.
Eclipse Aviation Div.
General Ceramics Co.
Groov-Pin Corp.
Heineman Electric Co.
Isolantite, Inc.
Keuffel & Esser Co.
Kidde, Walter & Co., Inc.
Magnus Chemical Co., Inc.
Marlin-Rockwell Corp.
National Lock Washer Co.
Pioneer Instrument Div.
Pyrene Mfg. Co.
Pollak Mfg. Co.
Roebling's, J. A. Sons Co.
Rollerbearing Co. of America
Swiftik Parachute & Equip. Co.
Thiokol Corp.
Titeflex Metal Hose Co.
West Jersey Paper Mfg. Co.
Worthington Pump & Mach. Corp.
Wright Aeronautical Corp.
Weston Electrical Instrument Company

NEW YORK
Aero Spark Plug Co., Inc.
Aerial Machine & Tool Co.
Aluminum Co. of America
American Cord & Webbing Company
Arta Aneroid Corp.
American Hard Rubber Co.
Air Reduction Sales Co.
American Motor Products
American Can Company
Anemostat Corp.
American Cyanamid & Chemical Co.
Anthony, W. S. Co.
American-La France & Foamite Corp.
Ashwell, Thomas & Co.
Atlantic-Pacific Mfg. Corp.
B G Corporation
Bell Aircraft Corp.
Bendix-Export Corp.
Blumenthal, Sidney & Co.
Bowen Products
Brewster Aeronautical Corp.
Cambridge Inst. Co.
Cameron, H. W. & Co., Inc.
Clarastat Mfg. Co., Inc.
Calculagraph Company
Carbide and Carbon Chemicals Corporation
Corning Glass Works
Carborundum Company
Crucible Steel Company
Chicago Pneumatic Tool Co.
Columbia Steel Corporation
Cork Insulation Company
Curtiss Propeller Division
Dunlop Tire & Rubber Co.
Dzus Fastener Co.
Eastman Kodak Company
Endicott Forging & Mfg. Co., Inc.
Edo Aircraft Corp.
Fischer, Chas., Spring Co.
Fairchild Aerial Camera Corp.
Federal Bearings Co., Inc.
Gould Storage Battery Corp.
Garlock Packing Company
Gredag Corporation
General Chemical Company
Graybar Electric Company
General Electric Company
Gould Storage Battery Corp.
Harrison Radiator Corp.
Henry Forge & Tool, Inc.
Hewitt Rubber Corp.
Houde Engineering Corp.
Hunter Sash Company
Ingersoll-Rand Company
Ideal Clamp Mfg. Co., Inc.
International Nickel Co., Inc.
International Standard Electric Corp.
International Business Machines Corp.
International Projector Corp.
Irving Air Chute Co.
Jaeger Watch Co., Inc.
Johns-Manville Company
Kemp, W. H. Company
Kollsman Instrument Co.
Kirkman Engineering Corp.
Liberty Accessories Corp.
Lear Developments, Inc.
Liquidometer Corp.
Linde Air Products Co.
Linzer, David & Sons, Inc.
McGraw-Hill Publishing Co.
McKesson & Robbins Inc.
Mercury Aircraft Inc.
Mill Factor Products Co.
National Carbon Co., Inc.
New York Central Railroad
Numberall Stamp & Tool Co.
National Lead Company
Ozalid Corporation
Oakite Products, Inc.
Parker-Kalon Corp.
Roll-Labei Manufacturing Co.
Rosen, A. W. & Co.
Ra-Ce Tool & Metal Stamp. Co., Inc.
Hanger Engineering Corp.
Rolled Metal Sections Co.
Reinhold Publishing Corp.
Simmonds Aeroaccessories, Inc.
Scintilla Magneto Co., Inc.
Spriesch Tool & Mfg. Co.
Standard Gauge Co.
Stimpson, Edwin B. Co.
Stewart Hartshorn Co.
Stripit Corporation
Star Machine Mfgrs., Inc.
Shore, The Mfg. Co.
Sperry Gyroscope Co., Inc.
Telephonics Corp.
Thomas Publishing Co.
Ulmer, A. J. Co.
United Aircraft Corp.
U. S. Steel Corp.
U. S. Gauge Co.
Vanderbilt, R. T. Co., Inc.
Wales Dove-Hermiston Corp.
Williams, J. H. & Co.
White, S. S. Dental Mfg. Co.
Westermann, B. Co., Inc.
Waldorf Mechanical Laboratories
Warren McArthur Corp.

OHIO
Addressograph Co.
Aero Instrument Co.
Air-Maze Air Filter Corp.
Aluminum Co. of America
Apex Machine & Tool Co.
American Hardrubber Co.
Auld, D. L. Co.
Austin Co., The
Avon Tool & Machine Co.
Baltimore-Ohio Railroad
Buckeye Portable Tool Co.
Cincinnati Machine & Supply Co.
Cincinnati Time Recorder Co.
Champion Machine & Forge Co.
Chesapeake & Ohio Railroad
Columbus Metal Products, Inc.
Consolidated Mfg. Co.
Cleveland Pneumatic Tool Co.
Continental Carbon, Inc.
Dayton Mfg. Co.
Dill Mfg. Co.
Diebold Safe & Lock Co.
Electric Vacuum Cleaner Co., Inc.
Federal Machine & Welder Company
Firestone Tire & Rubber Co.
Formica Insulation Co., Inc.
Frigidaire Corp.
Fyr-Fyter Co.
General Tire & Rubber Co.
Goodrich, The B. F. Co.
Goodyear Tire & Rubber Co., Inc.
Goggle, The Parts Co.
Grimes Mfg. Co.
Hasbond Aircraft Specialties, Inc.
Hansen Manufacturing Co.
Hyland Machine Co.
International Flare-Signal Co.
Koehler Tool & Mfg. Co.
Kline Mfg. Company
Lincoln Electric Company
Leece Neville Co.
Lear Aviation Co.
Lamson & Sessions Co., The
Libbey-Owens-Ford Glass Co.
Monmouth Products Co.
Moore Eastwood & Co.
Marquette Metal Products Co.
National Bronze & Aluminum Co.
Ohio Seamless Tube Co.
Packard Electric Co.
Parker Appliance Co.
Pump Engineering Service Corp.
Pollak Steel Co., The
Price, Sam J.
Perry-Fay Company
Romec Pump Company
S. A. E. Steels
Service Tool & Engineering Co.
Standard Aircraft Products, Inc.
Steel Products Engineering Co.
Timken Roller Bearing Co.
U. S. Rubber Products, Inc.
Van Dorn Iron Works
Variety Aircraft Corp.
Weatherhead Co., The
Weldon Tool Co., The
Western Automatic Machine Screw Co.

OKLAHOMA
Macklanburg-Duncan Co.

OREGON
Pacific Spruce Company

PENNSYLVANIA
Aero Supply Mfg. Co., Inc.
Aluminum Co. of America
Allegheny Steel Co.
American Chemical Paint Co.
American Window Glass Co.
American Cable Co.
Anchor Packing Co.
Bond, Chase Co.
Budd, Ed. G. Mfg. Co.
De Sanno, A. P. & Son, Inc.
Disston, Henry & Sons
Fleetwings, Inc.
Grannues, L. F. & Sons, Inc.
Jessop Steel Co.
Kellett Autogiro Corp.
Kopp Glass, Inc.
Leeds & Northrup Company
Lovi Manufacturing Co.
Linear Packing & Rubber Co.
Mine Safety Appliance Co.
McCrosky Tool Corp.
National Tube Co.
Pennsylvania Railroad
Phosphor Bronze Smelting Co., The
Pittsburgh, The Stamp Co.
Rohm & Haas Co., Inc.
Safetee Glass Company
Synthane Corporation
Shallcross Mfg. Co.
Summerill Tubing Company
Superior Steel Corporation
Universal-Cyclops Steel Corp.
Westinghouse Electric & Manufacturing Co.
Wiedmann Machine Works

TEXAS
Ahlfinger, Max Company
Briggs-Weaver Machinery Co.
Bradley, Allen Company
Baldwin-Duckworth Division
Becket Electric Co., Inc.
Continental Screw Company
Cannon Electric Development Co.
Dixie Disinfecting Company
Dorsey Co., The
Engineering Sales Company
Eagle Lock Company
Eggelhof Engineers
Gulf Oil Company
Gisholt Machine Company
Hirsig, A. H.
Hengy Electric Co., J. M.
Hunter-Hayes Co.
Harter, C. J., Machinery Co.
Hamilton-Huster Machinery Company
Harvey Hubbel Company
Kearney & Trecker Corp.
Layne Texas Company
Louden Machinery Corp.
Lunkenheimer Co.
Lamson & Sessions Co.
McArdle Equipment Co.
McDonald, B. F. Co.
Magnolia Brush Mfg. Co.
Magnolia Airco Gas Products Company
Motor Parts Depot
Miller & Miller Motor Freight Lines
Nelson Electric Supply Co.
Ohmite Mfg. Company
Parker Griffith
Peony, Sam H.
Preston Machine Tools Sales, Inc.
Product Sales Corporation
Pittsburgh Plate Glass Co.
Rogers Printing Co.
Southwest Airmotive Co.
Smith, J. Earl
Texas-Pacific Railroad
Van Horn, Oliver H. Co., Inc.
Weiner Lumber Company
Wessendorf, Neims & Co.
Wyatt Metal & Boiler Works
Well Machinery & Supply Co., Inc.

RHODE ISLAND
American Screw Company
Arbeka Webbing Company
Hope Webbing Company
Patton-Macguyer Company
Stackbin Corporation

TENNESSEE
Aluminum Co. of America
American Lava Corporation
Fisher Body Works
Fulton Sylphon Company

WASHINGTON
Boeing Aircraft Company
Pioneer Lumber Company

WISCONSIN
Algoma Plywood & Veneer Co.
Allis Chalmers Mfg. Co.
Briggs & Stratton Company
Cutler-Hammer, Inc.
Dumore Co., Inc.
Durant Mfg. Company
Fulton Co., The
Griffith Hope Co.
Interstate Forge Company
Ladish Drop Forge Company
MarWhyte Company
Moto Meter Gauge & Equipment Div.
Oilgear, The Company
Shallcross Controls, Inc.
Young Radiator Company

VERMONT
Jones and Lamson Machine Co.

THE NORTH AMERICAN WAY ★

AMERICA GEARS FOR WAR! A nation of free men, dedicated to peaceful progress, now creates the Arsenal for Democracy and builds in abundance the weapons for its own defense. Teamwork is the key to this great effort as factories, forges and shops throughout the nation have been geared to the mass production of parts, materials and sub-assemblies for North American military airplanes, turned out in ever greater volume at Inglewood, Calif., Dallas and soon at Kansas City.

KANSAS CITY

DALLAS

INGLEWOOD

★ TO BUILD WITH TEAMWORK IS *the North American Way*

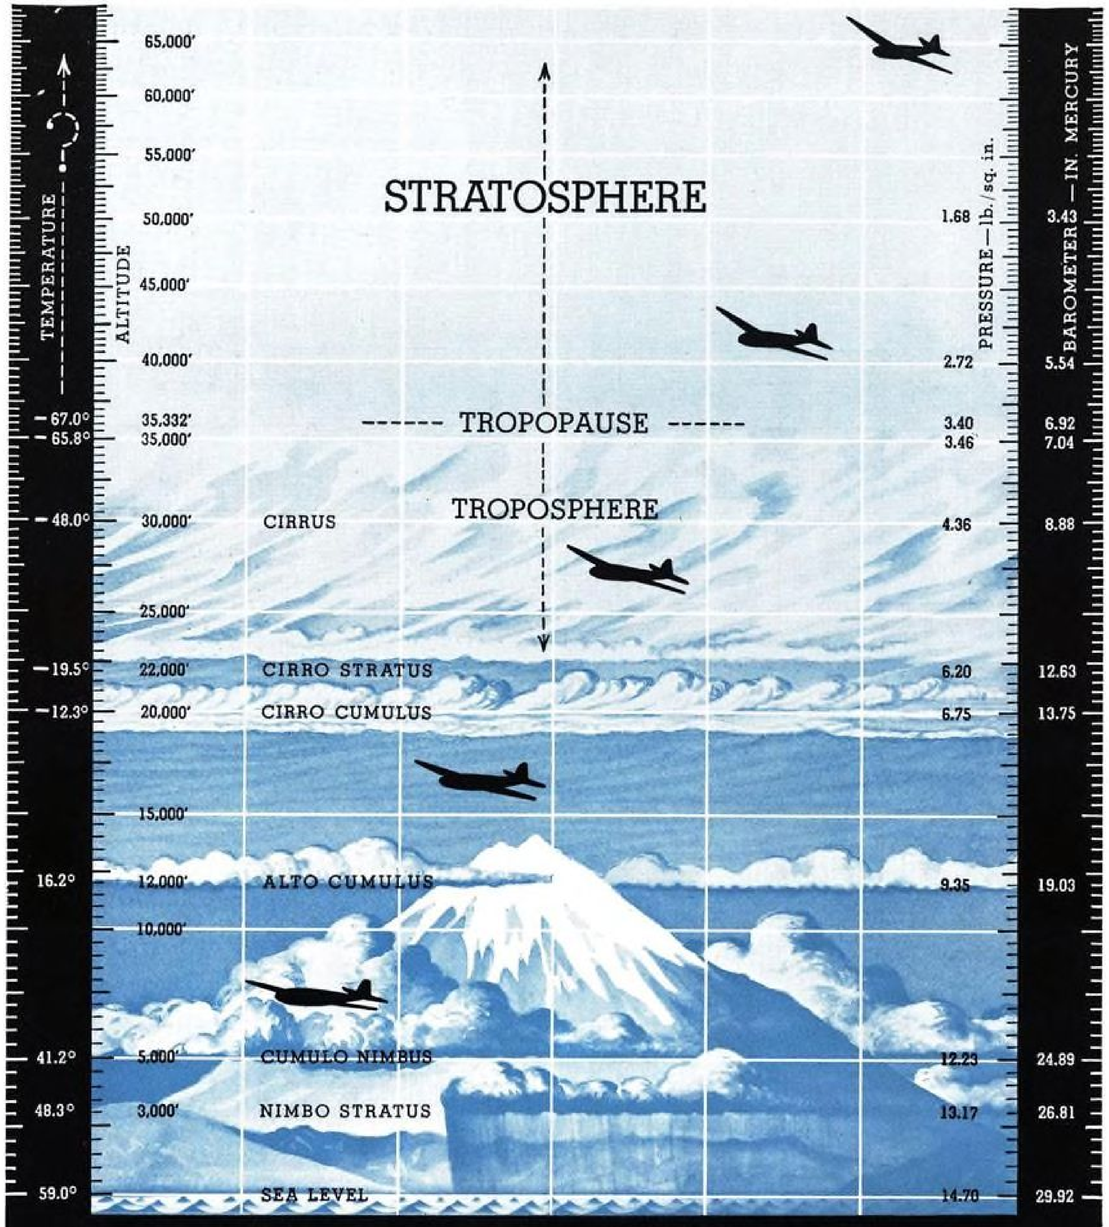

AIRESEARCH TODAY GRAPHS THE FLIGHT PICTURE OF TOMORROW

High into the rarified air of the Stratosphere will go the military planes, passenger transports and cargo carriers of the future. Airesearch engineers are constantly working with "high altitude" air created in their laboratory, contributing their knowledge to new applications and designs. We welcome the opportunity to assist in your development and production problems.

AIRESEARCH MANUFACTURING CO.

Los Angeles Municipal Airport, Sepulveda Blvd., at Century, Inglewood, California

OIL COOLERS INTERCOOLERS CABIN PRESSURE CONTROL SYSTEMS

"Teamwork" is the Call to Victory in the Battle of Production

ELECTRONIC BLACK LIGHT

for North American B-25

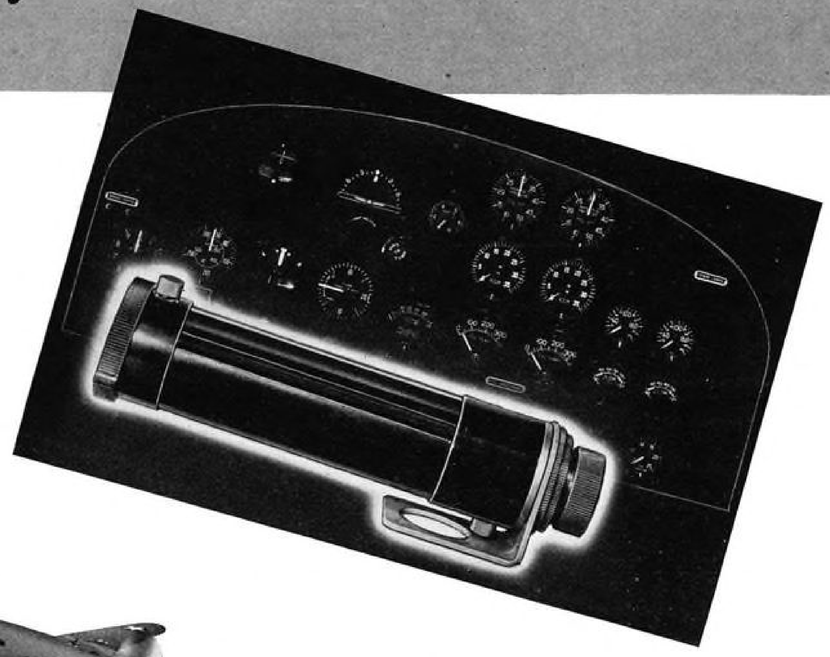

● The hard-hitting, versatile North American B-25 medium bomber, that can ably double in the role of twin-engined fighter, is equipped with Electronic Invisible Ultra-Violet (Black Light) instrument illumination . . . as are all other new planes for the U. S. Army Air Corps, U. S. Navy, Royal Air Forces of Great Britain, Netherlands East Indies, and others.

Electronic "Black Light" gives *daylight* instrument visibility at *night* . . . without glare or objectionable contrast between inside and outside of pilot's compartment. Thus, Electronic guards against eye fatigue . . . helps keep pilot efficiency high! The Type X-205 Lamp in the B-25 weighs only 7/10 of a pound and operates on but 6 watts . . . with a minimum of maintenance during its long service life.

Electronic "Black Light" is just another example of the way Electronic is solving electrical engineering problems on defense equipment.

● **IN ADDITION** to furnishing the aviation industry with Black Light, Vibrator-Type Power Supplies, Control Boxes, and Lamp Assemblies for both *visible* and *invisible* light . . . Electronic maintains a highly-skilled, resourceful engineering staff working daily with military and civil manufacturers on *their specific electrical engineering problems.*

For further information, address:

ELECTRONIC LABORATORIES, INC.

AIRCRAFT DIVISION, INDIANAPOLIS, INDIANA

North American Aviation

(Continued from page 87)

our production line going while the new supplier is getting set up. And we always have the worry of a parts shortage which may result on some critical item because of spoilage of a production run at some remote plant.

The above potential headaches, plus the constant difficulty of finding and training sufficient executive and supervisory people to make it possible to keep the whole complicated machinery of a major sub-contracting effort in motion, well illustrates the difficulties in the way of accomplishing the requested production miracle.

But in spite of such problems, we have achieved, with the help of all those engaged in this effort, tremendous progress. Our purchases of parts and materials from outside sources will reach a total of more than $100,000,000 for the year 1941, as compared with $45,000,000 in 1940. And percentage-wise we have upped sub-contracting from about 15 percent of our total production early in 1940, to approximately 30 percent on November 1, and with a figure of 34 percent of total production anticipated shortly. It should be emphasized that 34 percent of our total production actually represents a very much greater proportion of possible sub-contracting, since something like half of our total work must be done in the primary plant.

Our production team now has grown to such huge proportions that it includes 65 major sub-contractors and more than 900 suppliers of parts and materials with their plants spread throughout every one of the 48 states. These plants all feed parts and supplies to our three factories located in Inglewood, Calif.; Dallas, Texas; and Kansas City, Kansas. While all sub-contracting is supervised from our parent organization in Inglewood, we have found it necessary to establish a sub-contract administration office at Cleveland, Ohio. This office facilitates the work of developing and controlling sub-contracting throughout the Eastern half of the United States.

In developing this great sub-contracting effort North American Aviation has had the fullest encouragement and co-operation from the government, and especially from the OPM, which has actively fostered the sub-contracting procedure. Other industries, notably the automobile industry, have played a major part in making possible the great progress which has already occurred. While Ford, Chrysler and other manufacturers have worked with other branches of the aviation industry in this connection, it has been our good fortune to have had the close cooperation of the General Motors Corporation. This has made it possible to take advantage of the established administrative procedure and executive and supervisory personnel which operates an integrated nation-wide industrial empire. Through the assistance of the General Motors Corporation many of the problems of finding suitable plants for manufacturing specific parts of our planes have been eliminated. Thus we have been able to work through one central administrative office and through it contact and maintain efficient relations with hundreds of small industrial units of all types scattered throughout the entire country. This advantageous relationship will continue throughout the period of the emergency and will work to the mutual advantage of our own company, the General Motors group, and the entire nation which needs this expanded production of vital weapons.

Another phase of sub-contracting which we are developing to advantage is connected with the manufacture of replacement parts for older models of aircraft now in service. We can turn over jigs and fixtures to plants which are able to manufacture such replacement parts efficiently. By careful supervision we are able to assure the customer, whether it be the Army Air Corps, or the air service of Peru, Argentina, or China, that replacement parts will be supplied to meet original specifications. Yet our parent plant will be freed of the necessity of conducting such small scale manufacturing, which would interfere materially with our mass-production effort on modern military planes now needed for actual combat work.

We have been particularly fortunate in connection with the sub-contracting scheme in that our plant was one of the first to break down an airplane for production into the maximum number of sub-assemblies and component parts. We pioneered in spreading the sub-assembly work back through the shop, doing as little work as possible on the final assembly line. The system proved to have many advantages. But the greatest advantage of all is found now in the ease with which we can allocate these various component parts and sub-assemblies to outside manufacturers for fabrication and assembly. Our experience with assembly problems over a period of years has helped to discover in advance and eliminate many of the difficulties which arise when a product is assembled from sub-assemblies which were manufactured in various plants remotely located with respect to the final assembly plant.

The detailed procedure which we have worked out for placing sub-contracts and for administering the net-work of plants and suppliers who cooperate with us on the over-all sub-contract effort is too involved for a complete explanation in the space available here. But it may be of interest to sketch an outline how we go about sub-contracting our work.

Specifications and drawings are developed in the engineering department, which works closely with the shop. Engineering personnel has in mind the problems of sub-contracting in the course of preparing the original design and does what it can to develop the design so that it will lend itself to outside fabrication if necessary.

This jig contains the horizontal stabilizer for North American's B-25 which will be sub-contracted when production is under way in Kansas City.

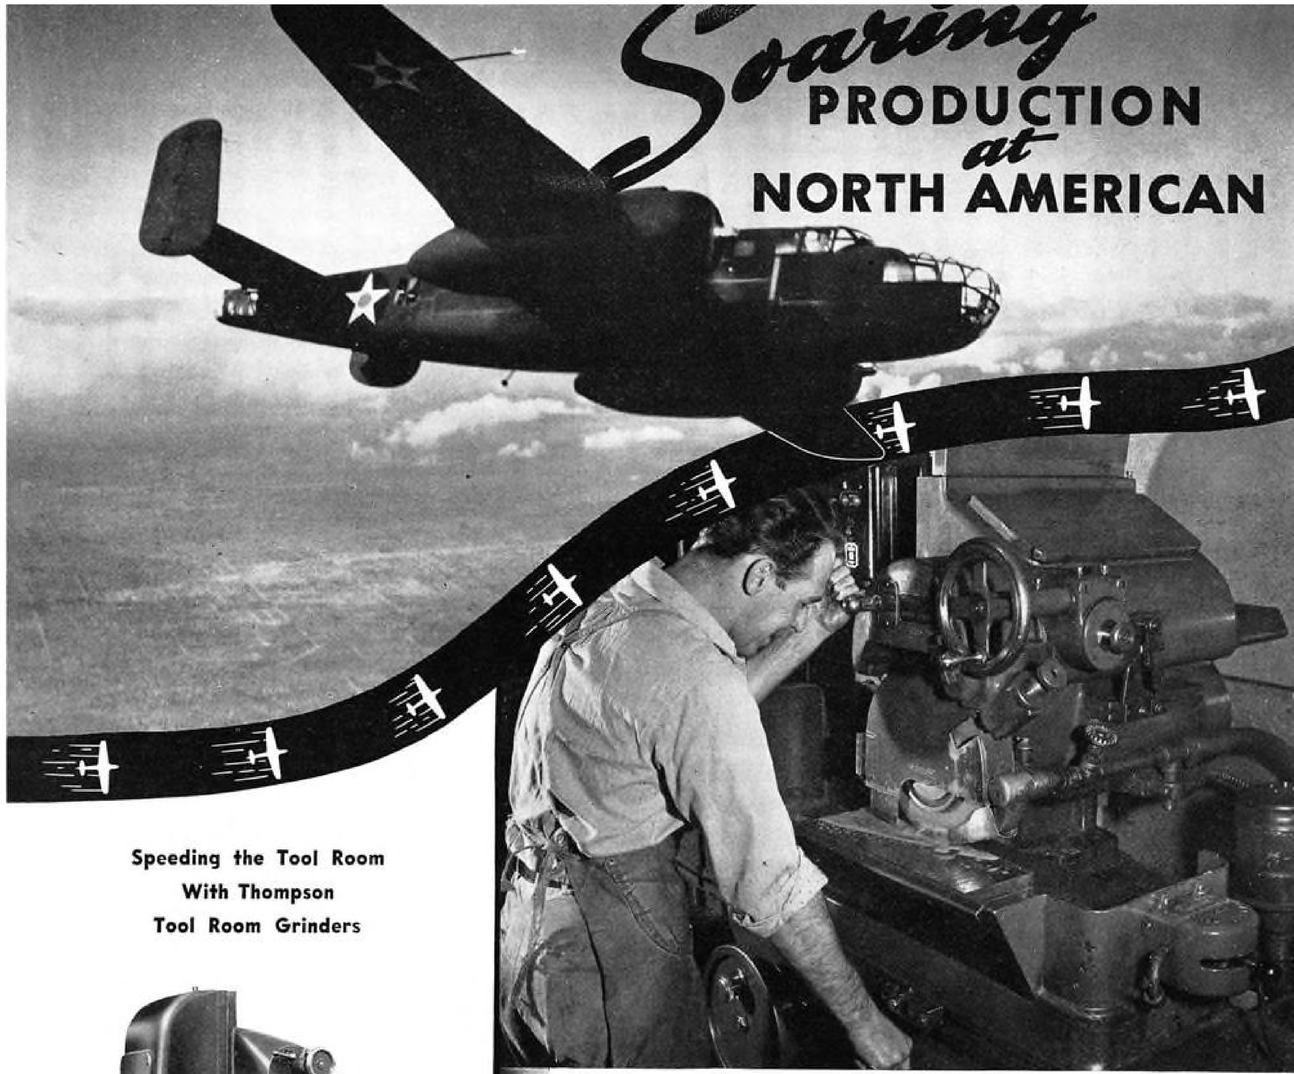

Speeding the Tool Room With Thompson Tool Room Grinders

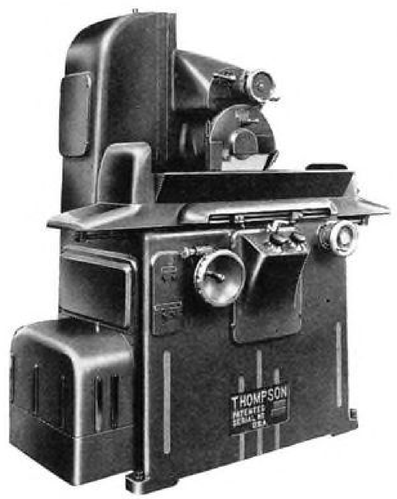

And for your tool room Thompson recently introduced a 6"x18" high speed Surface Grinder streamlined for production, highly sensitive and extremely accurate—capable of working to limits of less than .0001". For production schedules or extremely accurate tool room work, this Thompson Type F Grinder meets the demand for speed and more speed.

with **THOMPSON** *Grinders*

In the North American Plant as in many other airplane plants, Thompson Grinders are meeting the demands for speedy output, absolute dependability and ease of operation.

It is under the stress of conditions like the present that the true value and full advantages of Thompson Grinders are fully appreciated.

Husky . . . versatile . . . fast . . . Thompson Grinders are a material aid at North American in the grinding to close tolerances a wide range of vital airplane parts, quickly, efficiently, at low cost.

Specifications, bulletins and general production information will be gladly sent upon request.

THE Thompson GRINDER CO.
SPRINGFIELD, OHIO

North American Aviation

(*Continued from page 96*)

The production department determines what proportion of total work is to be sub-contracted. This is based on a study of the man-hour machinery load curve for the departments concerned. All production requirements above the capacity of the department concerned must obviously be sub-contracted. Which specific parts are to be sub-contracted is then determined on the basis of tooling, nature of the work, etc.

An outside production department maintains a continuing study of outside production facilities available, capacities of such plants and ability of the various shops to handle the required work. Among the considerations entering into this determination are: suitability of machinery; ability to meet required delivery dates; ability to meet quality standards; general considerations of business responsibility and reliability. All of these factors are determined by a staff of field men who maintain constant personal contact with such plants. This staff has multiplied 15 fold in little more than a year. These men are specially trained for such work and often must educate small shops to the standards required in the work to be placed. They frequently find themselves serving as advisers on varied problems of management, machine efficiency, material conservation, and shipping.



Fuselage side panels for the B-25 which may also be fabricated by outside factories and delivered to the main assembly plant.

Following placing of contracts, the sub-contract work is supervised by a follow-up department which investigates production schedules to make sure that work is delivered within the required time. Inspection is handled by a separate outside inspection department which, wherever possible, inspects the work before it is shipped from the sub-contractor's plant. Where this is not practicable a separate inspection is performed at the time of receiving at the primary plant. The receiving department maintains a reporting system which keeps the follow-up and outside production departments informed at all times of the parts or materials placed in the stockroom.

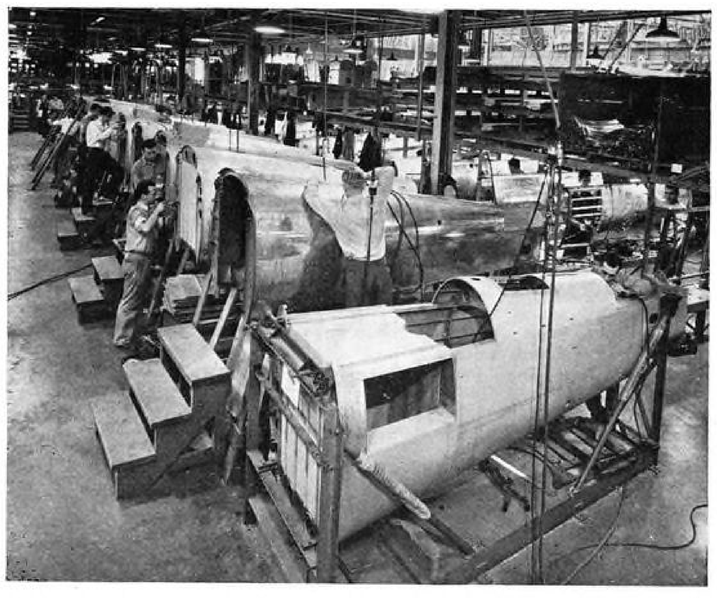

Sub-assembly work on a line of fuselage rear sections. This work is now being sub-contracted.

Through the follow-up and production control departments a constant check is maintained on location and progress of all parts and materials. This makes it possible to shift parts and materials among the three plants, if necessary, and also to give help to the individual sub-contractor, when needed. Such help may consist of furnishing extra material, helping the sub-contractor obtain priorities, furnishing machine tools, or supplying additional blue prints.

The central follow-up department also works in close collaboration with the outside production department to supply tips on prospective plants where work might be farmed out, or to advise against the use of certain shops which may already be overloaded. The follow-up men must have considerable experience and be carefully trained. It is preferred that such men have experience in the company's planning, material control, and production control departments if possible. They must also be well acquainted with the design, construction and detailed parts of the three principal North American production models, the B-25 bomber, the P-51 pursuit, and the AT-6A advanced trainer. These follow-up men must be aggressive in order to keep the wheels turning, but they must be patient and tactful in order to avoid friction.

Work of Investigators

The job of the investigators, who report on prospective sub-contractors is somewhat different but no less exacting. Such investigators must know as much about shop equipment as a seasoned machinist. Men are preferred who have had experience in the shipping and receiving departments. They must know machinery, tools, jigs and fixtures, and must be able to read blueprints. They must also have an intimate knowledge of the company's production models. As mentioned earlier, the number of men now active in connection with our sub-contracting program has grown tremendously. We are expanding this number steadily but it cannot be done over-night due to the special requirements such men must possess.

As with the investigators and follow-up men, the inspectors must have special training and qualifications. The same is true for the personnel in receiving and shipping. Also, a complex cross-indexed bookkeeping system has been developed to keep all departments concerned informed of progress throughout the entire scope of the sub-contract program.

It is a complex and difficult problem, but through teamwork of all concerned we believe we are performing the only production miracle possible at this time.

AAF FILTERS KEEP NORTH AMERICAN PLANTS *Dust* FREE!

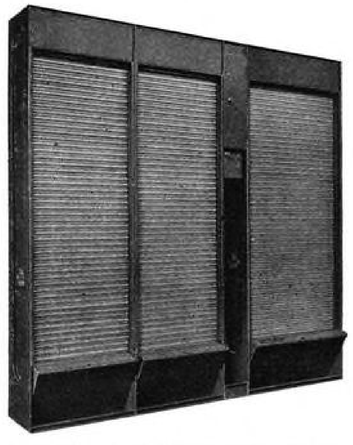

American Automatic Filters are comprised of one or more filter sections with rotating filter curtains that automatically clean themselves as they pass through a Viscosine bath at the bottom of the filter. The best features of design and construction of the American Multi-Panel and Double-Duty filters have been combined in the new American Automatic. Complete information on this outstanding filter for ventilating and other industrial uses is available on request. Please ask for Bulletin No. 240D.

American Air Filter equipment cleans the air supplied to work rooms in the huge plants of North American Aviation, Inc., guaranteeing ideal atmospheric working conditions. In the Dallas and Kansas City units alone (J. Gordon Turnbull, Consulting Engineer, Cleveland; Freyn Bros., Heating & Ventilating Contractors, Indianapolis), American Automatics handle 2,500,000 cu. feet of air per minute.

North American is another of the hundreds of companies engaged in defense work which depend upon AAF Dust Control Equipment to keep production moving at unprecedented speed.

American Air Filter engineers have devoted more than 20 years to the study and development of atmospheric and process dust control and are today the world's largest manufacturer of air cleaning equipment.

For *Atmospheric Dusts,* a complete line of filters is offered including fully automatic mechanical and electrostatic types such as are used by North American.

For *Process Dusts,* Roto-Clone collectors—both dry and wet type—are in general use by all industries.

Bulletins describing the application of AAF products are available on request. Write for them.

AMERICAN AIR FILTER COMPANY, INC.
INCORPORATED
308 Central Ave. Louisville, Kentucky

AAF DUST CONTROL *and* AIR FILTRATION EQUIPMENT

"Teamwork" is the Call to Victory
IN THE BATTLE OF PRODUCTION

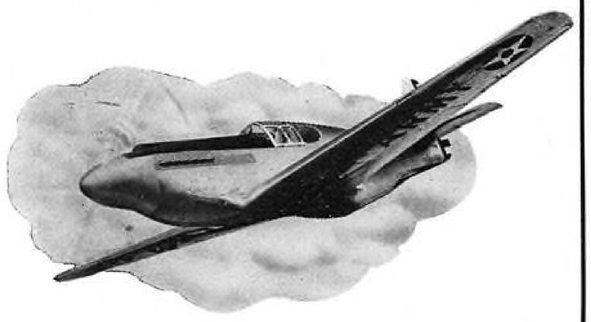

THE BOSTON AUTO GAGE COMPANY

manufacturer of

DIRECT READING
MAGNETIC
LIQUID LEVEL GAGES

—— is supplying the Aircraft industry with gages for ——

FUEL AND OIL SYSTEMS
HYDRAULIC PROPELLERS
ANTI-ICERS

Illustrated above is North American Aviation's P. 51, built for the U. S. Army Air Corps,—English version, the Mustang. This ship is equipped with two Model 106—NA Boston fuel tank gages.

•

North American's use of Boston products is typical of the team-work between leading aircraft manufacturers and their suppliers of quality equipment.

•

THE BOSTON AUTO GAGE CO., PITTSFIELD, MASSACHUSETTS

STANDAIR

STANDARD AIRCRAFT PRODUCTS *Salutes* NORTH AMERICAN AVIATION

Teamwork is vital! And every component is vital to the perfect, finished product. Standard recognizes its responsibility to the aircraft industry.

"Standard" manufactures:

1. Airplane Lighting Equipment
2. Aircraft Sheet Metal Parts
3. Heat- and Pressure-control Instruments
4. Heat Transfer Equipment

"Teamwork" is the Call to Victory
IN THE BATTLE OF PRODUCTION

STANDARD AIRCRAFT PRODUCTS, INC.
Dayton, Ohio

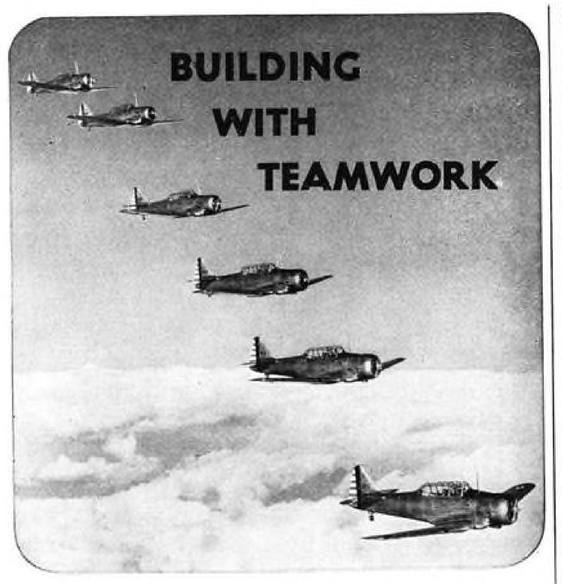

Streaking through the southern California skies, these North American AT-6A Advanced Trainers, equipped with Wittek Type FB Stainless Steel Hose Clamps, wing toward Army Air Corps Training Bases, where they will be used in the final stage of Cadet training.

Leading aircraft manufacturers, engine builders, and airlines name the Wittek Type FB as the standard specifications hose clamp.

DESIGNED, BUILT AND TESTED
For Aircraft Use
WITTEK
TYPE FB STAINLESS STEEL
HOSE CLAMP

WITTEK
MANUFACTURING CO.
4305 W. 24th Pl., Chicago, Illinois, U.S.A.

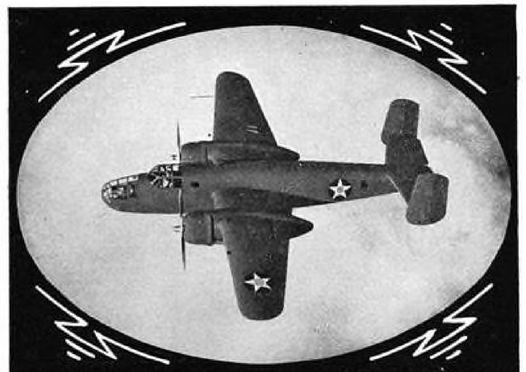

NORTH AMERICAN
"Drills the Clouds"
with BUCKEYES

Hundreds of BUCKEYE tools are doing a serious job at NORTH AMERICAN

In an "all out" effort to put American Defense out in front NORTH AMERICAN looks to BUCKEYE tools to put more and more planes in the blue.

Small tools are vital to speedy airplane production, and the extreme flexibility and all around utility of BUCKEYE Tools is a big factor in maintaining the rigid production schedule at NORTH AMERICAN.

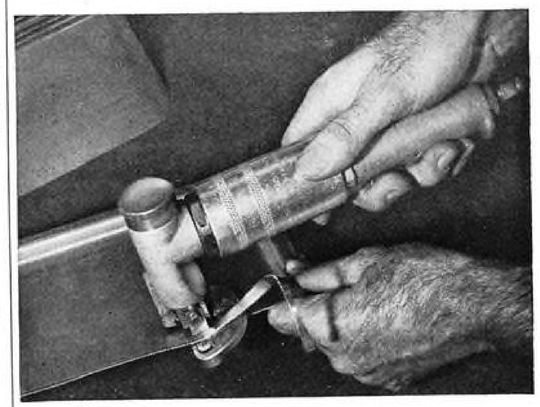

Illustrated is a BUCKEYE Shear cutting sheet metal parts easily and quickly at NORTH AMERICAN.

BUCKEYE Tools include:

Drills	Jig Drills	Grinders
Screwdrivers	Countersinks	Angle Drills
Nutrunners	Shears	Corner Drills
	Nibblers	

THE BUCKEYE PORTABLE TOOL CO.
DAYTON • OHIO

ROMEC PUMPS... ON THE NORTH AMERICAN

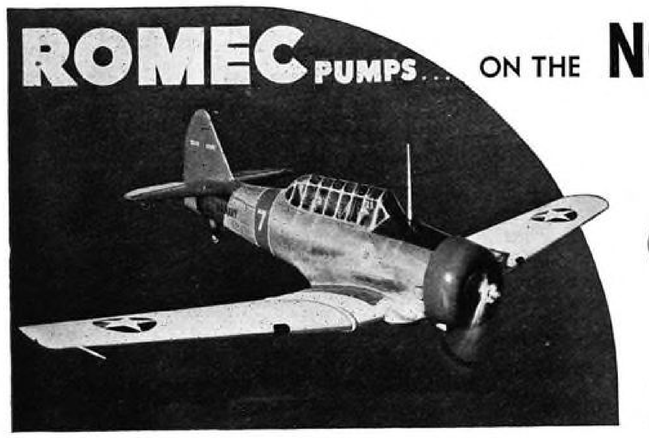

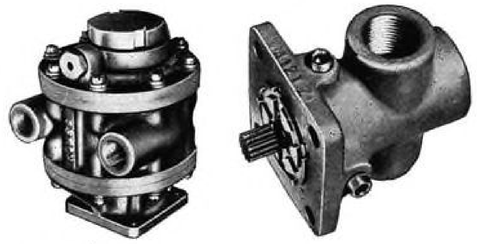

"Teamwork" is the Call to Victory
IN THE BATTLE OF PRODUCTION

Romec salutes North American for its achievement and speed in the aircraft program.

Illustrated here are two Romec Pumps used by North American. RD-4120, with fuel pressures ranging from 2 to 25 lbs. per sq. in., with constant flow of 150 G.P.H. Capacity based on pump speed of 1750 r.p.m. Its non-pulsating feature assures dependable performance at greater pressures.

RD-2112 Vacuum Instrument Pump has a free air capacity of 4½ cubic feet per minute at 1500 r.p.m. Designed with self-adjusting rockers containing metallic packing strips locked in the end of the sweeping vanes.

ROMEC PUMP CO. ELYRIA, OHIO

PIONEERS IN THE MANUFACTURE OF A COMPLETE LINE OF AIRCRAFT PUMPS.

FOR FLIGHT *Precision*

Arens is proud to serve the Army by supplying the new B-25's with quality precision remote controls.
In the air, where precision is vital, you'll find the Army's new North American twin-engine, medium bombers equipped with Arens precision remote controls.

Write for Complete Catalog

ARENS CONTROLS, INC.
2257 South Halsted Street, Chicago, Illinois

IT'S UNDER PERFECT CONTROL IF IT'S ARENS

When You Need Quick Action . . .

on Opportunities available or wanted in AVIATION

Use

The "MARKET PLACE" OF AVIATION

Published Each Month

SPEED UP THE FLOW OF PARTS TO ASSEMBLY!

Install the storage system widely used in aircraft plants . . . the Stackbin System. Keep parts in portable Stackbins designed for storage, transportation, assembly. Build storage space of any desired capacity for Stackbins or other containers with patented Stackracks that lock together. For the ideal stockroom - assembly unit, get Stackbins-in-Stackracks!

STACKBIN CORPORATION
87 Troy Street Providence, R. I.

"TEAMWORK"

NORTH AMERICAN — MID-STATE

MID-STATE *Manufacturing* COMPANY
WAUPUN • WISCONSIN
AIRCRAFT RIVETS

Onsrud Tools and Machines to take more from each hour

For routing, drilling, shaping, grinding, milling, and lapping, Onsrud gives you tools and machines for high speed production and simple easy control. Today 99% of the U. S. aircraft industry employs Onsrud machines.

Onsrud air turbine and high cycle motors turn tool and machine spindles at tremendous metal cutting speeds of 5,400 to 50,000 RPM. Feeds are amazingly fast; bits leave metal mirror smooth. High RPM, bearing design, and patented centrifugal feed lubrication combine to give freedom from vibration and ease of operation. Air turbine motors run cool indefinitely, kept so by the refrigerating effect of expanding air.

From Spar Millers, machining 30 foot wing spars in 10 minutes' time, to ¼ HP Hand Routers turning at 50,000 RPM, Onsrud offers high speed tools and machines to take more finished work from each hour.

For complete information on any Onsrud tool or machine, write:

ONSRUD MACHINE WORKS, INC.
3938 Palmer Street, Chicago, Illinois, U. S. A.

"Teamwork" is the Call to Victory
IN THE BATTLE OF PRODUCTION

Helping to Make *Aviation* History

HANSEN Push-Tite AIR HOSE COUPLING

The famous Hansen *Push-Tite* air hose couplings are doing their bit in the great production line at the North American Aviation, Inc. plant, where the "Battle of Production" is being so successfully waged.

Hansen *Push-Tite* air hose couplings are used extensively by the U. S. Army and Navy and many of the leading aviation and industrial plants throughout the country. They are quicker, easier and more economical to operate. A slight push of the plug into the socket and it's connected absolutely air tight and at the same time the air is automatically turned on, a gentle pull and it is disconnected and air is instantly turned off.

Hansen *Push-Tite* air hose couplings save time, money and will greatly increase production.

Hansen MFG. CO.
INDUSTRIAL AIR LINE EQUIPMENT
1786 E. 27TH STREET • CLEVELAND, OHIO

Britain's New "Heavies"

FOREIGN FLYING EQUIPMENT

The British turn to the long range, heavy bomber, a type pioneered by our Air Corps.—Some comparisons with the Boeing Flying Fortresses.

ENGLAND having come rather abruptly, for reasons best known to the R.A.F., to a more than academic interest in heavy, long range bombers, there is naturally some speculation on this side of the water over the home-grown British models, the Handley Page Halifax and Short Stirling.

As the long range, high altitude, bomber was pioneered in this country, among the questions foremost in American minds is, how do the new British bombers stack up against the Flying Fortress, a type originally developed by the Boeing Airplane Co. for our Air Corps in the early 30-s?

Details released by the Air Ministry on the Halifax and Stirling are confined mainly to physical descriptions; performance figures are kept secret, although a number of Halifaxes have been brought down over enemy territory. The Stirling, which is somewhat the larger of the two, weighing about 65,000 lb. gross, has a wing span of 99 ft., length of 87 ft. 3 in., and a height of 22 ft. 9 in. Fortresses, weighing 47,500 lb. gross and 31,160 lb. empty, have a greater wing span, 103 ft., but overall length is considerably less, approximately 68 ft. So the Stirling, built like a flying box car, must be capable of carrying a bigger bundle of bombs to Berlin, something like 6–7,000 lb. The Fortress Model C carries about 4,800 lb. in bombs.

Power for the Stirling comes from either four Bristol Hercules 14-cylinder air-cooled radials of 1,600 hp. each, or four double-row 1,600 hp. Wright Cyclone 14's. Boeings are powered by Cyclone 9's.

The Halifax is approximately the same size as the Boeings, although it is greater in height by some feet—span is 99 ft., length 70 ft., and height 22 ft.—but unlike any other British or American heavy bombers, it is powered by liquid-cooled engines, four Rolls-Royce Merlins rated at about 1,050 hp. each at 18,500 ft. Both the Halifax and the Stirling are midwing monoplanes, but whereas the former has twin fins and rudders, the Stirling has a single tail structure.

The Halifax is reported to have good controllability. Stalled in a demonstration flight last Sept. 12, the motors are said to have picked up again with little loss of altitude. Take-off was quite short and with the Handley Page slotted flaps fully depressed, landing was said to be both slow and reasonably short.

Three-bladed Rotol constant speed, full feathering propellers are used, and the Merlins are housed in nacelles which are level with the upper surfaces of the wings. Two glycol radiators and an oil cooler are carried together in a duct under the crankcase. Exhausts are single jet, flame damping types.

Of all metal construction, the Halifax is said to have been designed for rapid production, although as both bombers were just being built when the war started it is probable large numbers have not yet been produced. Each part is divided into sections small enough for easy transportation from shadow factories to final assembly points, and each section is in turn sub-divided to obtain maximum economy of man power.

The wings are of sweep-back design with square-cut tips, affording the pilot and bomb-aimer a lateral view extending abaft of the beam. For some reason the wings are not provided with deicers, although the tail is. The Stirling seems to be similarly equipped.

Landing gear on the Halifax is a remarkably sturdy-looking fork-type, which is a single magnesium casting, having telescopic action capable of more than 12 inches travel. Retraction is backwards into the inboard nacelles. The Halifax's tailwheel is fixed, but the interesting double tailwheel on the Stirling, installed undoubtedly because of the great loads carried, is retractable, as is also the main landing gear.

A flying box car, which probably carries a bigger load of bombs than any other bomber, the Short Stirling has bomb-bay doors extending from beneath the pilots' cockpit almost two-thirds the whole fuselage length of 87 ft.

Press Association

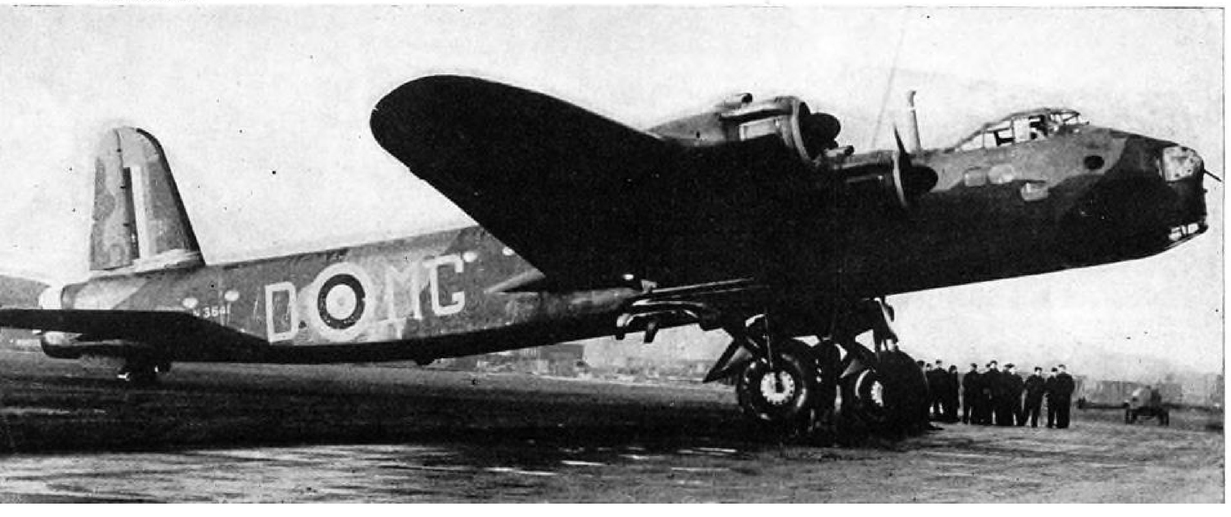

British Combine

The Handley Page Halifax is powered by liquid-cooled Rolls-Royce Merlins. Note the single-orifice exhausts on the engines and fuel jettison pipes below wing flaps. Landing gear is a single magnesium casting.

British Combine

Close-up of the triple racks in which the Stirling's bombs are loaded. Ground crew are attaching a cable by which the 500 lb. bomb is hoisted into the rack by a motor.

British Combine

Fuel and bombs being loaded into a Stirling for a heavy raid on the Ruhr and Rhineland.

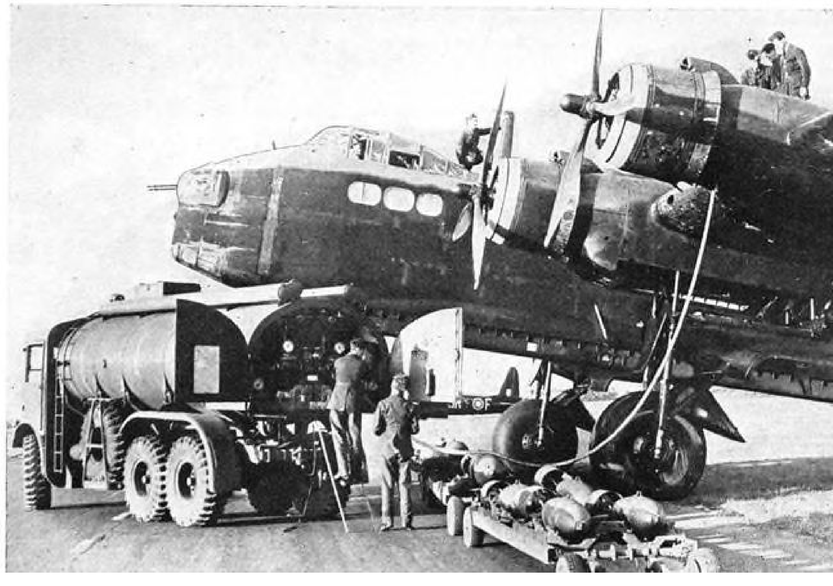

Bomb compartments take up most of the fuselage below the wing in these planes—triple bomb racks extend almost the length of the Stirling's 87 ft. fuselage, starting from beneath the pilots' cockpit in the nose—and armament is reported to be very heavy. On the Halifax a 4-gun Boulton Paul power turret is installed in the rear tail position and a 2-gun turret in the nose, which in both bombers, especially the Stirling, juts far out beyond the leading edge of the wings. The Stirling is apparently armed in like manner, with further armaments on either unrevealed. Armament on the Boeing B-17E is also heavy, with a power turret "stinger" in the tail and another in the fuselage, in addition to the belly guns.

Neither the Halifax nor the Stirling were in service until some time after the present dispute with Germany started—it is reported that last winter not more than two squadrons of Stirlings were in operation at any one time. A perhaps significant revelation concerning the Halifax, in lieu of performance figures, is the admission that "several have been lost", whereas up to this time there has been no confirmed loss of a Flying Fortress. Undoubtedly, no Boeings have been lost because they can reach altitudes in excess of effective ground fire, and, although Me 109 F's have engaged the Fortresses in combat at 30,000 ft., the Nazi fighters find it difficult to maneuver at that altitude.

British pilots, not the magazine writers, are credited with saying that at high altitudes the Boeing was definitely better than the Stirling or Halifax, and that at 25,000 ft. they found it to be even faster than the Spitfire or Hurricane.

Thus, any shortcomings in the defensive armament of the Boeings, so often complained of by British aviation journals, is more than made up by their ability to climb far above the effective

(Turn to page 218)

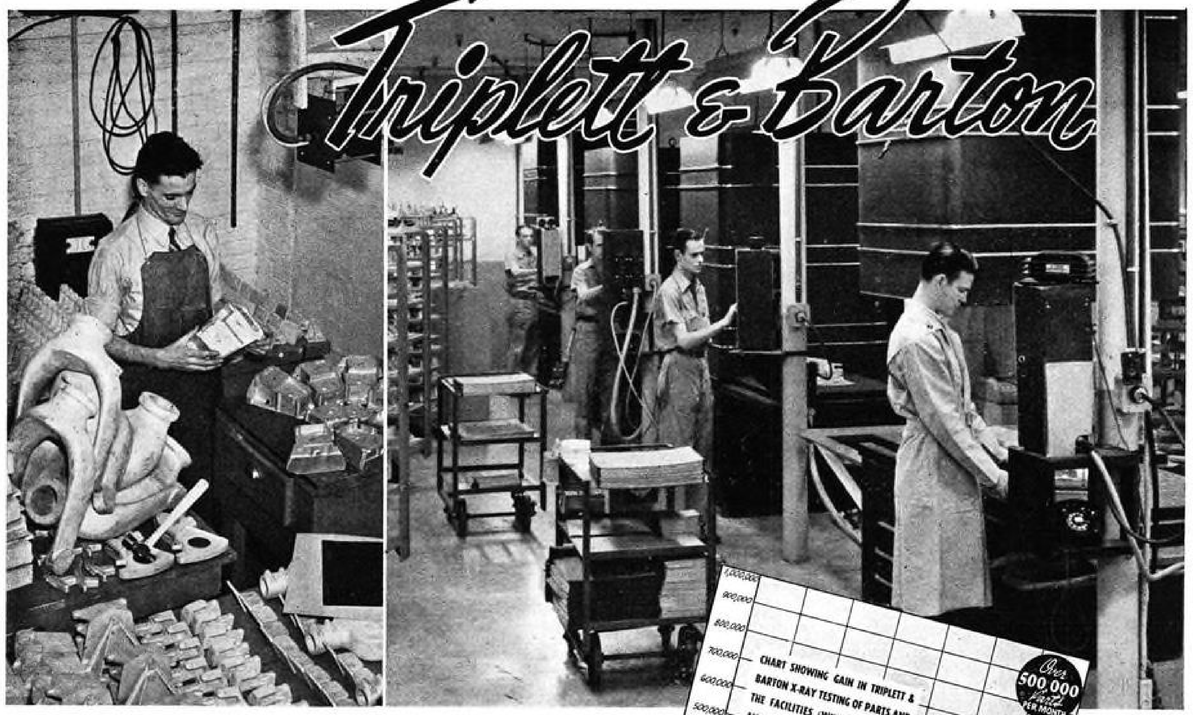

The PROOF OF THE PUDDING

—is in MAINTENANCE COST savings that are being made possible by the 100% X-Ray analysis and examination of all stress parts used in the fabrication of present-day airplanes. Only 7 years ago, Triplett & Barton designed and built their first X-Ray unit for the purpose of examining industrial materials. In this early experiment, aircraft manufactures considered a 1% examination sufficient to disclose defective materials.

Since that time, Triplett & Barton have expanded their engineering research and today have in operation the most advanced metallurgical X-Ray equipment in the field—these machines have been so designed and have been built in such quantity that they could more than double the present volume of required analysis.

From a then-astounding record of 600 parts per month in 1935, they have advanced the art until now over 100,000 parts are being examined monthly. Facilities now installed in Burbank, Wichita and elsewhere will enable Triplett & Barton to handle over 500,000 parts per month when the aviation industry has advanced to the point where this tremendous volume will be required.

CONSULTATIONS MAY BE ARRANGED

★ WICHITA, KANSAS ★ TRIPLETT & BARTON INC. METALLURGICAL DIAGNOSIS ★ BURBANK, CALIFORNIA ★

Metallurgical X-Ray and Gamma Ray analysis, Physical and Electrical testing, Chemical and Spectrographic determination, X-Ray Diffraction, Metallography Heat Treatment and Foundry Sand testing, High-Speed and Micro-photography, etc.

Morrow Plywood Trainer

LATEST plastic bonded plywood training plane is the Morrow Victory secondary trainer test flown Nov. 1, in San Bernardino, Calif., by Vance Breese. Powered with the new 175 hp. horizontally opposed six-cylinder Lycoming engine, this tandem training plane has a top speed of 165 m.p.h. General design is conventional, of low wing cantilever monoplane arrangement with retractable landing gear. Unusual performance is claimed to result from the smooth surface provided by the plywood which is bonded and impregnated with a plastic resin.

Said to be built of materials that are plentiful on the Pacific Coast, the structure is of wood throughout, except for such parts as engine mount and landing gear, and has been designed to take the fullest advantage of plastic bonded wood material. Fuselage framework is of laminated bulkhead rings, with longitudinal spruce stringers, over which inner and outer molded skin sections are attached in two halves. The wing is built in one piece, bolted directly to the fuselage. A novel structural feature is that, while the rear spar runs for the full span of the wing, serving as an attachment for the flaps and airlerons, the front spar does not extend much beyond the landing gear support point.

The retractable landing gear is hydraulically actuated by means of a hand pump. Brakes are hydraulic, a special feature being a hydraulic brake lock which acts as a parking brake.

Wing span of the Victory trainer is 30 ft. 4 in., overall length 25 ft. 4 in., height 7 ft. 9 in. and weight empty 1656 lb. Range is 1,000 mi., top speed 165 m.p.h., cruising speed 145 m.p.h., and landing speed with flaps 55 m.p.h. Standard equipment includes hydraulically operated retractable landing gear, oleo shock struts, hydraulic brakes, hydraulically operated split flaps, complete Kollsman flight instruments on shock-mounted instrument panels in both cockpits, adjustable rudder pedals, Ranger radio receiver and transmitter in rear cockpit only, and hand fire-extinguisher.

A new-comer among California aircraft companies, Morrow Aircraft Corp. was formed in 1940 by Howard and Frank Morrow, successful eastern merchants. Associated with the Morrow brothers is W. R. Angell, Jr., formerly in charge of the aeronautical division of Continental Motors Corp. Chief Engineer is Dwight S. Mills, formerly with Lockheed Aircraft Corp.

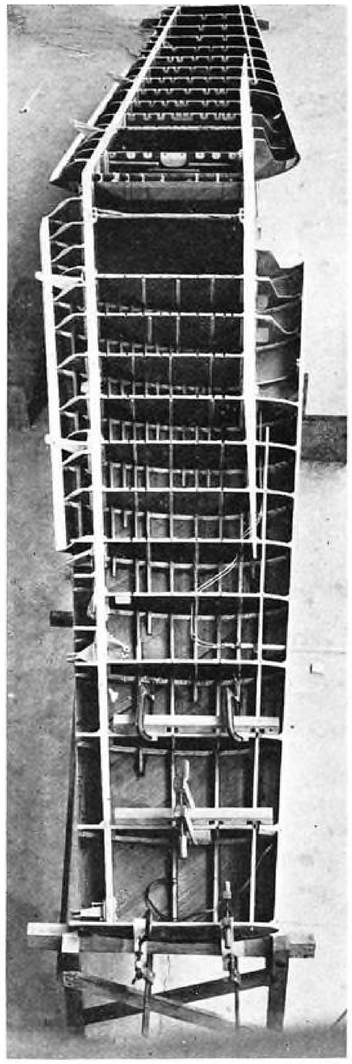

Above, the under side of the half-completed, full cantilever wing of the Morrow trainer, showing self-sealing integral fuel tanks on either side of fuselage attachment point.

Each half of the fuselage skin is molded to the shape of fuselage to which it is bonded with a plastic resin.

Landing gear of the trainer is hydraulically operated and retracts into wells toward fuselage center.

Flying EQUIPMENT

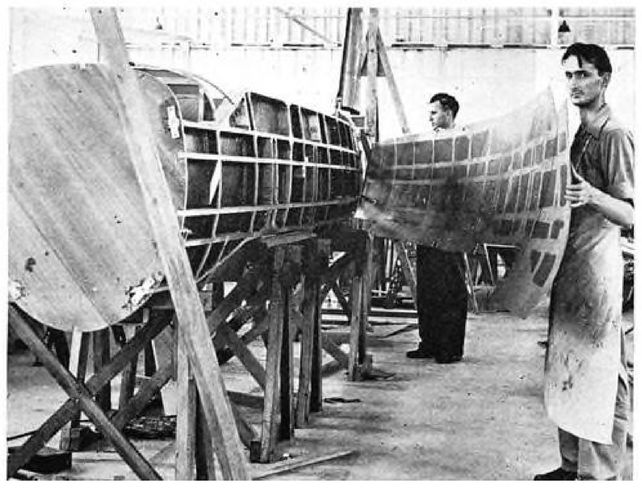

Laboratory Control For Ranger Engines

Extensive Laboratory control of materials and methods makes for constant improvement in quality and performance of Ranger Aircraft Engines.

By Clinton B. F. Macauley, *Washington Editor, Aviation*

WE can all remember when a machine shop or engine factory was an honest, reliable-looking structure of dingy aspect with grimy windows and myriad overhead pulleys with long belts slapping in the breeze. Stubble-faced machinists in greasy overalls hunched over their machines hour after hour, unmindful of the litter of waste and scrap in which they stood.

Certain old-timers, whose sentimental affections for a past now dead tend to belittle the achievements of a newer order, have been heard to snort in their beer in disgust at the bright and cheerful aspect of clean plants with air conditioning and miles of fluorescent lighting tubes, stubbornly refusing to face the facts of their improved efficiency of production and the superior quality of the products manufactured.

Labs Move Into Factories

To these old-timers a "laboratory" was a vague place up at the State University where every now and then a piece of this or that was sent for analysis or testing. Today the laboratory has moved right into the factory. If it isn't in the plant itself, it's right next door. And this is as it should be, for out of the laboratories come the new ideas, techniques and products which will enable the industry to meet successfully the inevitable readjustments of post-war years.

The well-equipped metallurgical laboratories in the Ranger Aircraft Engines plant at Farmingdale, Long Island, provide an excellent example of how mechanic and scientist now are working side by side to the end that a particular engine will be as fine as human knowledge, ingenuity and patience can make it. In the present emergency, national defense producers also are fighting against time. The efficient utilization of newest laboratory techniques in close coordination with production processes frequently saves days and weeks in critical instances, and in the long run doubtless gains months and years over older methods in the improvement of design, materials and performance.

The personnel of the metallurgical department at Ranger consists of a group of analytical engineers, each highly specialized in his particular field, engaged in spectrographic analysis, photoelastic analysis, chemical analysis, physical testing, microscopic study, and development work in the fields of heat-treating and casting.

Function of the Laboratory

This is how the laboratory functions. Suppose a cylinder-barrel forging isn't machining-up properly in the shop, or for some other reason is under suspicion —despite the fact that chemical analysis and physical test reports are required for all Ranger materials. A new complete chemical analysis might require up to a week. Obviously impractical, but aircraft engine manufacturers cannot fool with questionable materials. So drillings or chips from the forging are sent in for a spectrographic analysis. In about half an hour the presence or absence of all of about 70 different elements will have been determined, and for many of these elements the percentage of each will be known, more accurately than is feasible by any other method.

Or, suppose a tiny speck of matter is found in a bearing surface and it is important to know what it is. Chemical analysis would be impossible with so little material to work on. But a veritable pin point of matter can be made to reveal its composition under spectrographic analysis.

Photographing the Elements

By this method the samples to be analyzed form the electrodes for a powerful spark. Ultra-violet rays emitted by the spark are broken down by the grating to form an evenly graded segment of the spectrum. This is recorded on photographic film which is quickly developed and dried, providing a permanent record of the analysis. The film is projected onto a screen and synchronized with a master scale paralleling it. Visible lines on the sample spectrum indicate the presence of a particular element. The wave length of each line, determined by its location on the scale, accurately reveals the identity of all of the elements present in the sample. Densitometer readings of these lines are obtained automatically through a micro slit and a photoelectric cell, all by simply pushing a button after adjusting the desired line to the control location. This reading is used in conjunction with calibration charts to give directly the percentage of the element which the sample contains.

The presence of any element can be detected by spectrographic analysis. However, the amount of carbon, phosphorus, and sulphur in steel still must be tracked down in the chemical lab, but special chemical apparatus makes it possible to find the amount of carbon and sulphur in steel within a few minutes. The detection of phosphorus requires somewhat longer time. The chemical laboratory of course is well equipped to make complete chemical analyses by conventional quantitative methods, as a periodic check on the accuracy of the elaborate spectrographic equipment. For small percentages of alloying elements, the spectrograph offers greater accuracy, less opportunity for errors, and vastly greater speed. In order to insure these results all of the spectrographic equipment has been located in three connecting rooms which are air-conditioned by a separate unit, to maintain dust-free conditions and constant temperature and humidity. The conditioned air is kept under pressure, so that leakage will always be out from the spectrographic laboratory and dust cannot enter.

The chemical laboratory in addition to the previously mentioned work, also checks the composition of cadmium and copper plating solutions, etching solutions, cleaning baths and various other

(Turn to page 190)

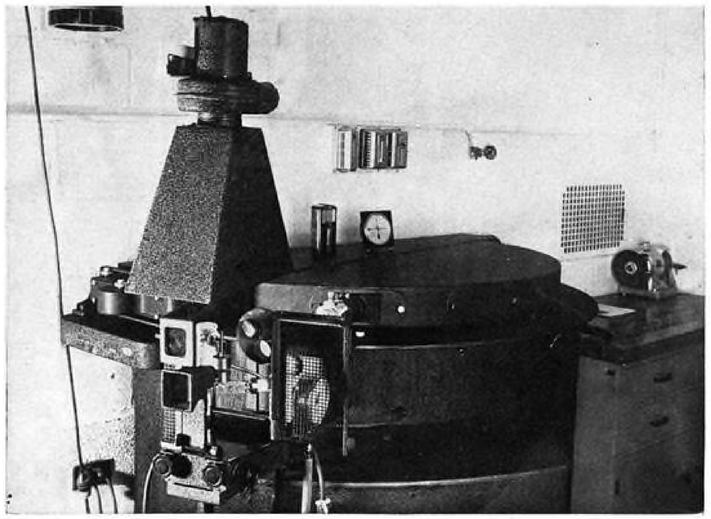

The basic unit of equipment of the spectrographic laboratory. Material to be analyzed forms the electrodes for a high-voltage arc. Ultra-violet rays from the spark are broken down to provide a portion of the spectrum which can be photographed, revealing the composition of the material and providing a permanent record for study and comparison.



A sample spectrograph is projected onto a screen and synchronized with a master scale paralleling it. The spectrum lines of the various elements are identified on the master scale.

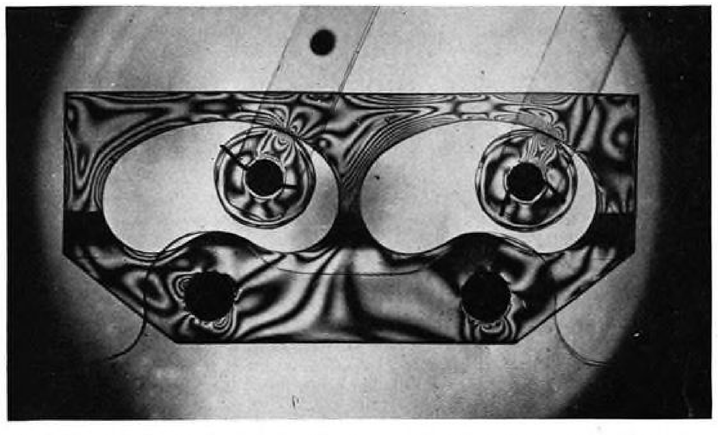

Illustrating the photoelastic method is this photograph with circularly polarized light of a Marblette model of an engine part under load.

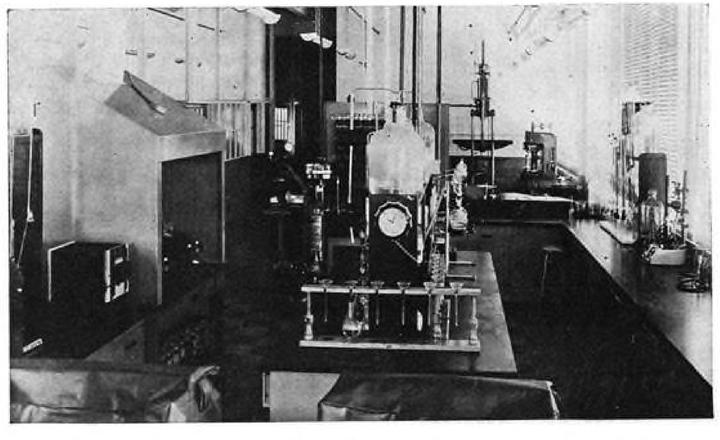

The well equipped chemical laboratory in Ranger's metallurgical department.

Photographic film of spectrographic analyses. Each film strip accommodates up to eight spectrographs. The presence of dark vertical lines indicates the existence of elements whose wave-lengths appear in that portion of the spectrum.

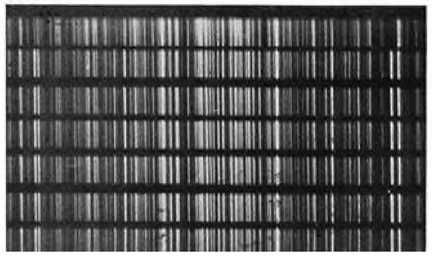

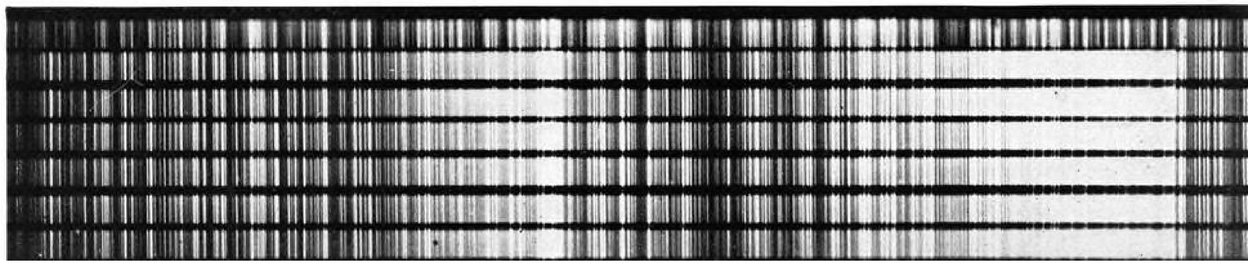

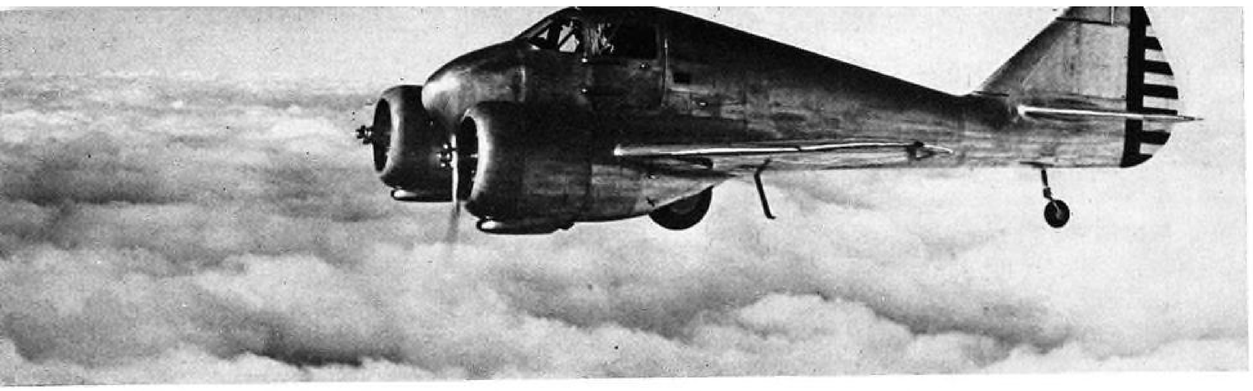

New Twin-Engined Trainer

Curtiss AT-9 incorporates same general performance and operating characteristics as multi-engined tactical aircraft

A NEW type of twin-engined plane for high speed, multi-engined fighter and bomber training was announced recently by Curtiss-Wright Corp. through Guy W. Vaughan, president of the firm. Delivery of the first plane to the Army Air Forces for accelerated service tests has been made.

Called the Curtiss AT-9, the new twin-engined plane was designed to shorten the long difficult step which young Army pilots experience in transferring from the single-engined, low powered training plane to the latest types of multi-engined tactical craft. It therefore incorporates the same general performance and operating characteristics of the latter types, including numerous instruments.

An all metal, low wing monoplane, it is equipped with retractable landing gear of the conventional type and has two side by side seats with provisions for two additional seats immediately aft of the two pilots. Power is supplied by two 280 hp. radials and fuel capacity is 150 gal. Many features have been incorporated in accordance with specific training demands of the Air Forces.

Top speed is more than 200 m.p.h. and range is 750 miles. Developed by the St. Louis, Mo., plant of the Curtiss-Wright Airplane Div., it is ideally adapted to mass production, according to Mr. Vaughan. A large number of them will be produced in the new Curtiss-Wright Airplane factory at Lambert Field in St. Louis.

The plane is said to be undergoing tests during which it is being flown as many hours within a few weeks as it would normally operate under ordinary service conditions in a year or more.

Aeronca Defender

THE Aeronca Defender, a new tandem trainer, is now in production by Aeronca Aircraft Corp., Middletown, Ohio.

Engineered for a 65 hp. motor, the plane now has for standard equipment an improved type of muffler. Engine cowling has been modified and strengthened around the base of the windshield. This new installation was conceived, it is said, for the remarkable effect it has in reducing engine noises in the cabin.

Extra heavy verticle tubes have been installed on each side of the cabin, eliminating a diagonal cluster and, as a result, materially strengthening the entire side of the fuselage. Exceedingly rough landings will now transfer shock through the gear and up through this tube and expand itself through the various connecting members. Addition of this oversize tube will insure complete fuselage protection against bad "stall outs" in landings, it is claimed.

Leverages on all control surfaces have been changed and approximately 1½ sq. ft. area has been taken off the rudder. The reduced rudder has been balanced, thus providing a control surface that is said to be exceptionally light to operate. Aileron chord has been decreased and is now of the slotted semi-frise type. Control is by means of a differential. Ele-

(Turn to page 202)

Flying EQUIPMENT

(Official photograph, courtesy United States Navy)

It may seem a far cry from a coal mine or a coke plant to one of these Navy SBC-4 dive bombers, and the aviation industry, but the connection is pretty close in many things.

Many plastic parts are made from Koppers coal tar acids. The long-lasting paint finishes are made with alkyd resins which, in turn, come from naphthalene derived from coal tar. The tires have much longer life because of rubber anti-oxidants and vulcanization accelerators derived from coal tar.

Electrodes made from coal tar pitch are indispensable in aluminum production.

Koppers coal tars help build long-lasting skid-resistant airport runways. Piling, drainage culverts, guard rail posts, landing docks and other timber used in airport construction have been pressure treated with creosote by Koppers to resist termites, decay and marine borers.

Many airport roofs are built with Koppers Coal Tar Pitch and much concrete, masonry and brickwork is protected with Koppers waterproofing and dampproofing.

Thousands of Koppers American Hammered Piston Rings are used in aircraft engines.

Let us send you any or all of these data sheets, folders, booklets from the Koppers Library of Technical Information which deal in detail with these products.

KOPPERS COMPANY
1277 KOPPERS BUILDING
PITTSBURGH, PA.

Please send me copies of these folders:

- ☐ "How to Order Piston Rings"—A-1
- ☐ "Construction and Maintenance with Tarmac"—T-2
- ☐ "Coal Tar Pitch Roofing Specifications"—TA-6
- ☐ "Koppers Membrane Waterproofing"—TB-3
- ☐ "Koppers Dampproofing"—TB-4
- ☐ "Disinfectants"—TD-14
- ☐ "Pressure-treated Timber"—G-6
- ☐ "Bridges of Pressure-treated Timber"—G-1
- ☐ "Pressure-treated Highway Posts"—G-9
- ☐ "How to Measure the Quality of Pressure-treated Timber You Buy"—G-11
- ☐ "Painting of Creosoted Wood"—G-13
- ☐ "Pressure-creosoted Poles"—G-15
- ☐ "Pressure-creosoted Laminex Culverts"—G-16

Name and Title.....

Firm.....

Address.....

.....

INSTRUMENTS OF VICTORY

The Army Says: "Do a thing; Do it Right; and be Quick about it!" Let American manufacturers adopt that slogan. We have at VARD. And here are three instruments, first developed for our own use, and now offered to you as aids in doing a job, doing it right and doing it Quickly.

The first of these, in the center above, is a circular dividing machine. It accurately divides any circular disc into predetermined segments. It is valuable in production of dials, protractors, and the like. We also manufacture a linear dividing machine for automatic dividing of strip material.

At either side of the divider, in the above picture, are new VARD external comparators, small handy table instruments, for checking limits in manufacturing. One is a dial gauge type. The other is a liquid column reading type. Both quickly indicate variations as small as one ten-thousandth of an inch. Each can handle work quickly. Adjustments are simple and positive.

VARD builds precision gages for checking threads, holes, and thickness. Likewise we produce special taps, optical lenses, prisms, and mirrors. Another branch of our organization turns out aircraft hydraulic units, drafting, and navigating instruments.

The VARD trademark on a product symbolizes thorough engineering, the best in materials, and technical, precision workmanship. PASADENA, CALIFORNIA, U.S.A.

VARD MECHANICAL LABORATORY

S. A. E. Engineers Review Year of Greatest Production Progress

Los Angeles meeting sums up achievements of past 12 months.

Photos by C. F. McReynolds, AVIATION'S Pacific Coast Editor.

NOW a traditional event among aviation engineers, the 1941 Annual Aircraft Production Meeting sponsored by the Society of Automotive Engineers in the Biltmore Hotel, Los Angeles, fully equalled previous such meetings in interest, attendance, and value to our production effort. Through Oct. 30, 31, and Nov. 1, engineers and industry executives crowded the sessions and the accompanying engineering display in the foyer adjoining the main auditorium. It is a convincing demonstration of the vitality of democratic traditions and principles that men can be found to join in staging such a successful meeting at a time when we are straining every nerve to meet production schedules. Not only had busy engineers taken time out to prepare and present important reports on significant developments, but there was no lack for an audience. As in the past the hall was several times jammed to complete capacity and there was every evidence that this year those in attendance were even more seriously interested in the proceedings than ever before. Total registration was approximately 1000 but there were a great many more who attended but did not register. Total attendance at the various sessions of the three-day meeting exceeded three thousand people, not counting those who inspected the engineering exhibit. Nor would it be fair to judge the success of this meeting by the number of those in attendance for many of the industry's top notables were there, including F. C. Crawford, of Thompson Products; T. P. Wright, OPM; Robert Hinckley, Asst. Secty. of Commerce, and A. T. Colwell, to mention only a very few.

Peter Rossmann, left, of Curtiss-Wright in Buffalo, and T. P. Wright, who gave one of the principal talks of the meetings.

Keynote of the meeting was struck by T. P. Wright with an address on morale. His encouraging report of our production progress during the past year gave sound reasons why we should have confidence in our weapons, our leaders, and ourselves. Along this same line was the report on "Blitzkrieg and How to Stop It," by A. T. Colwell, S.A.E. president. Colwell's analysis of military developments of the present war left little doubt that an all-out production effort was the principal solution to our problem of stopping the Blitzkrieg.

But not all of the discussion was on military developments. One of the biggest crowds of the meeting gathered to hear Wm. B. Stout tell about his new light airplane and engine, which are being developed with an eye on the "after-the-war" market.

On the production side there were invaluable reports of such new developments as the duPont explosive rivet, George Tharratt's description of the use of perspective sketches in place of blueprints on the final production line, the place standardization is playing in our expanded production effort, by C. E. Stryker, of the OPM, etc.

Research reports were concentrated largely on problems of high altitude operation, including two-speed superchargers, air intake scoop research, icing problems, and vapor lock investigation. Importance of this work was stressed by F. C. Crawford, pres. of Thompson Products, in stating that many experts believed that whichever side succeeded best in solving problems of high altitude flight would win the war.

Exhibits in the Engineering Display quite properly featured the part subcontractors and vendors are playing in the amazing expansion of aircraft pro-

(*Turn to page* 168)

Bill Stout proved to be one of the chief spellbinders when he described his new airplane and engine.

F. C. Mock, of Bendix, read a paper on carburetor air scoops and their effect on fuel-air metering in flight.

L to r: Carleton Stryker of OPM; George Tharratt of both Douglas and Adel; and Mac Short of Vega.

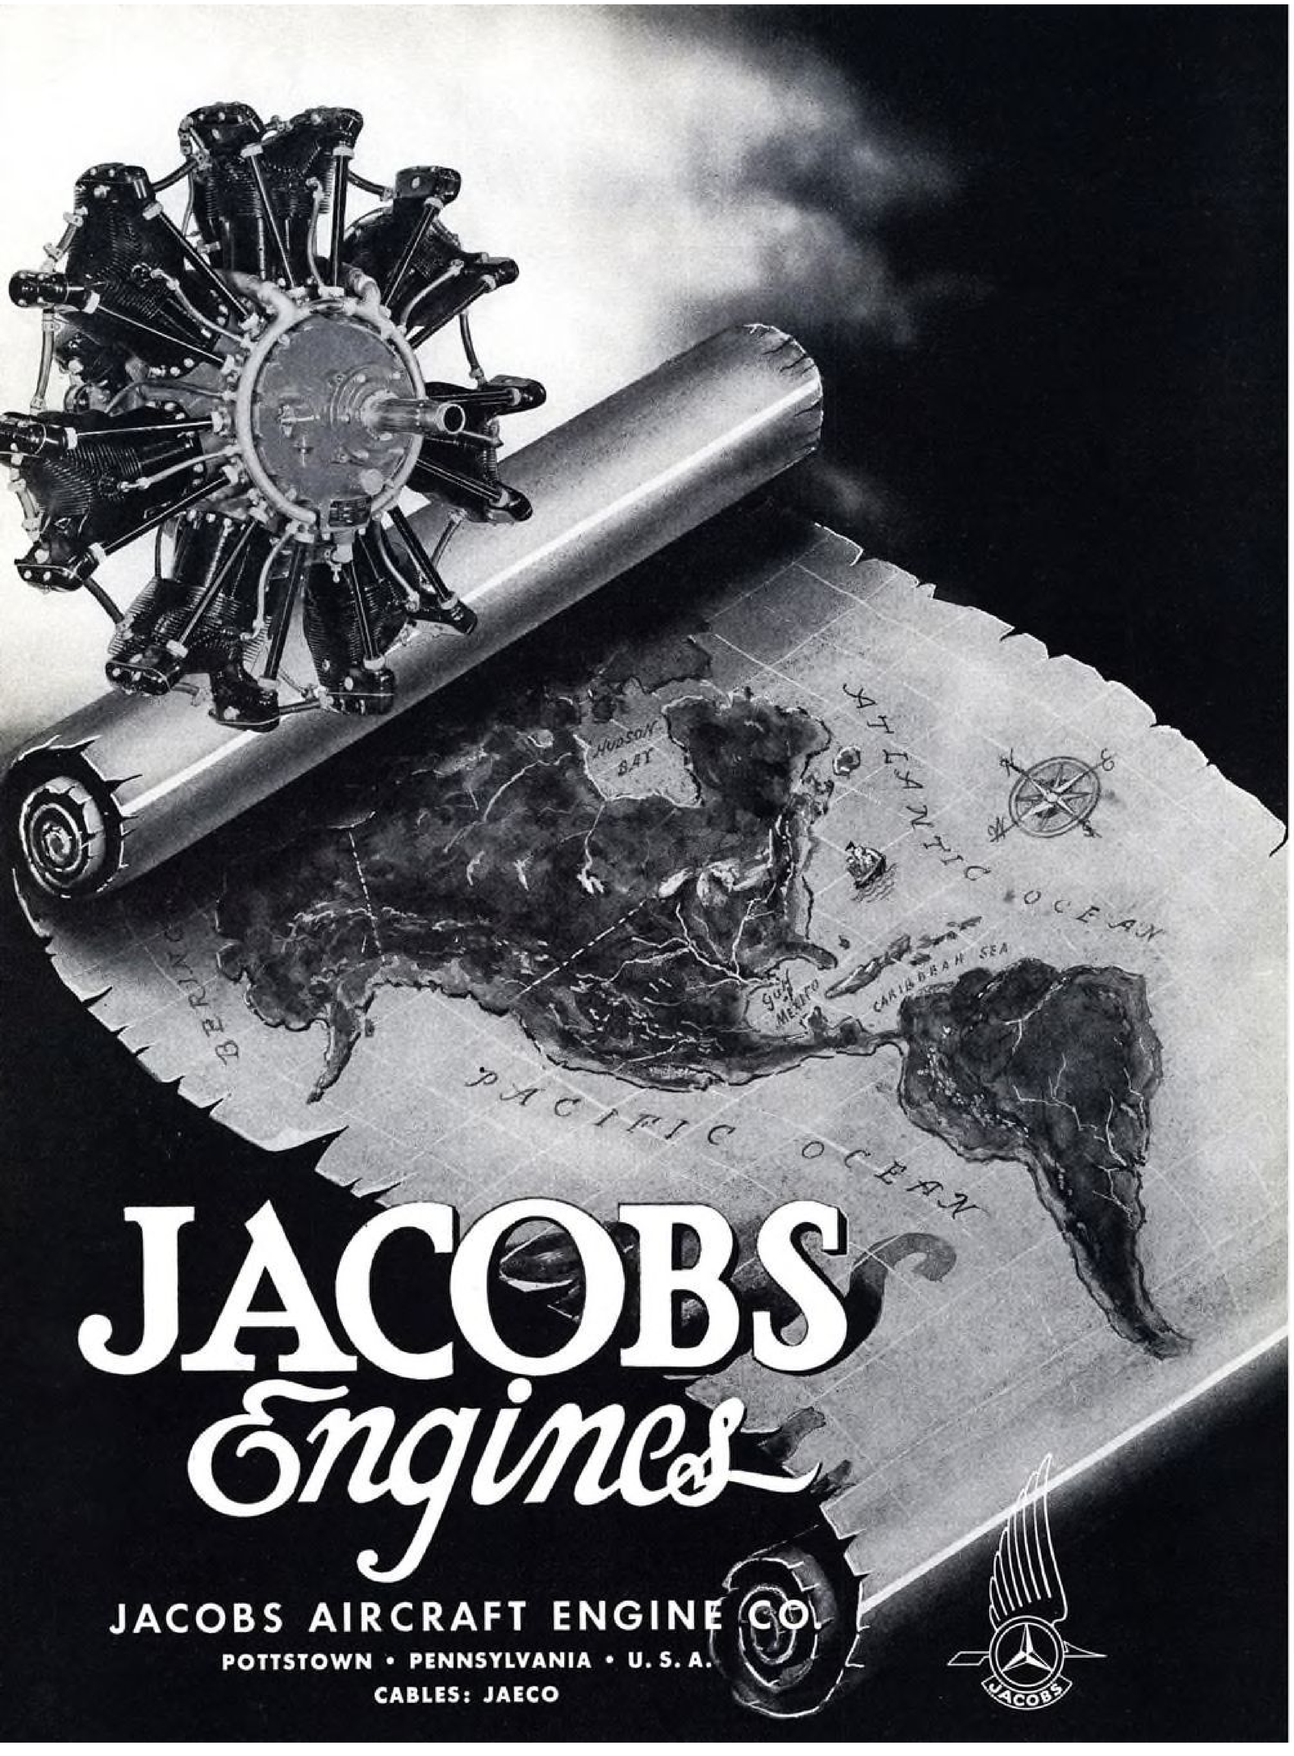

AIR FILTERS for Airplane Engine Protection

This article is of timely interest because of recent emphasis on air filters for all military airplanes.

By Wm. K. Gregory, *Division Manager, American Air Filter Co., Inc.*

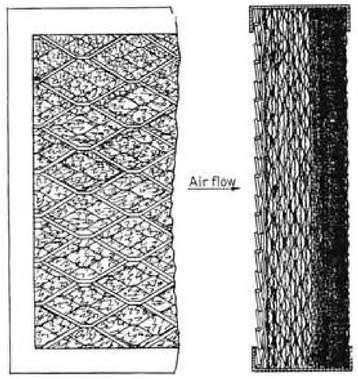

Fig. 1
UM-155

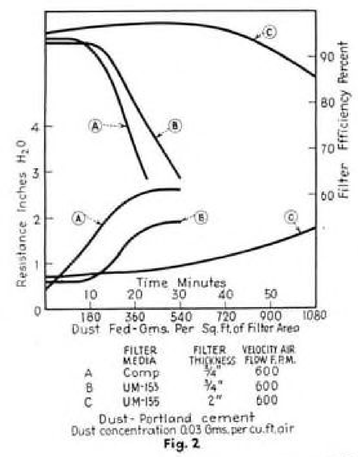

Fig. 2

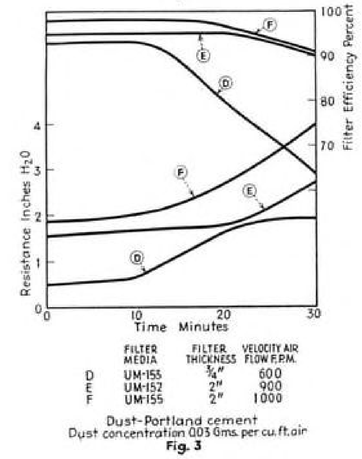

Fig. 3

Preliminary research covering air filters for the protection of airplane engines was covered by an article which appeared in the October issue of "AVIATION". Further research has continued, and in collaboration with the Army, Navy, individual airplane manufacturers and motor manufacturers, it has been possible to establish definite air filter specifications and a standardized test procedure which differs from the test procedure previously followed and reported in the earlier article.

PLANS are being made at the present time to install intake air filters on the motors of virtually all training planes, bombers and fighters now being manufactured for the U. S. government. The experience of the British in their operations in the deserts of Africa and elsewhere has emphasized the importance of air filter protection.

Even in the United States severe engine wear has occurred at a number of air fields, particularly those in the South. When our air activities were limited to commercial planes and a relatively small number of Army and Navy planes which used well-paved runways, we had no acute dust problem, but with our expanding air force it has become necessary to use more and more temporary air ports with unpaved runways. Planes taking off in formation generally use some of the unpaved portion of the field even where paved runways are available, and great clouds of dust are kicked up by the planes in the lead which go into the engines of the planes following unless adequate air filter protection is provided. This obviously results in excessive engine wear and makes it necessary to overhaul and rebuild engines at frequent intervals, thus increasing the amount of maintenance required. Disregarding the expense of this maintenance, we are now confronted with a problem of production, and anything which can be done to increase the effective life of an airplane motor is virtually equivalent to increasing our production facilities.

The first step in the application of air filters to airplane engines is the selection of the type of filter to be used. Oil bath air cleaners, which have been used with great success on trucks, tractors and large stationary Diesel and gas engines, are ruled out immediately due to their size, weight and the fact that oil would spill out in maneuvering the plane. Dry type air filters, which employ felt or other fabric as a filter media, are inflammable and require frequent replacement. During actual warfare, the replacement of dry type filters would constitute a serious problem, as it would be necessary to provide cargo space for shipment and a dry place for storage. Another objection to dry type filters is that they offer a high resistance to air flow and increase rapidly in resistance as dust is accumulated. For all these reasons, dry type filters are considered unsuitable for airplane application even though some of them have been used with certain success by the British.

If the oil bath and dry type filters are eliminated from consideration this leaves only the washable viscous impingement type filter. Air filters of this type consist of a metallic filter media mounted in channel frames and so arranged as to provide a tortuous path for the air passing through. This filter media is coated with oil, and when dust carried in the air stream strikes the oil-coated surfaces it is caught and held. A typical filter of this type, which is so designed that there is a considerable amount of space between the individual strands of filter media on the air-entering side and the density gradually increases toward the air-leaving side, is shown in Fig. 1. The purpose of this construction, which is normally referred to as "progressive packing", is to distribute the dust caught

(*Turn to page 206*)

Presented at the October meeting of the American Society of Mechanical Engineers at Louisville, Ky.

A Procedure Control For Aircraft Welding

By A. K. Seemann, *Engineer,* *The Linde Air Products Company*

Part II

Part I of this article, published in the November, 1941 issue, discussed the need for a procedure control, problems of engineering design for welding, selection and inspection of materials and such factors in procedure as edge preparation, spacing, penetration, reinforcement and rods.

TO make an oxy-acetylene weld, a small area at the edges of the two parts being joined is heated until a small pool of molton metal is formed. Then as this pool is made to progress along the junction of the two parts, additional metal is added from a welding rod. The rear edge of the puddle is continuously solidifying while additional metal is becoming molten at the leading edge of the puddle. There are three important parts to the welding operation: the flame, the welding rod, and the method of making the weld.

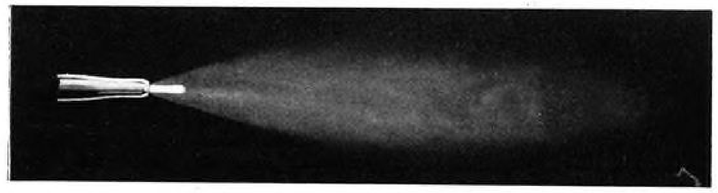

Fig. 5—The neutral flame has an intense inner cone that is sharply defined. This is surrounded by a bluish outer envelope. During welding, the outer envelope protects the hot metal from oxidation by the air. Fig. 1-4 appeared in Part I.

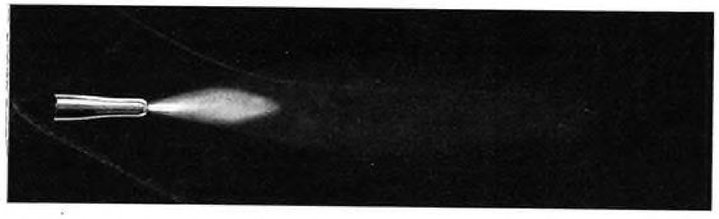

Fig. 6—The excess acetylene flame has a third zone surrounding the inner cone. This excess acetylene feather is made up of white-hot particles of carbon. The length of the feather with respect to the inner cone is a measure of the amount of excess acetylene.

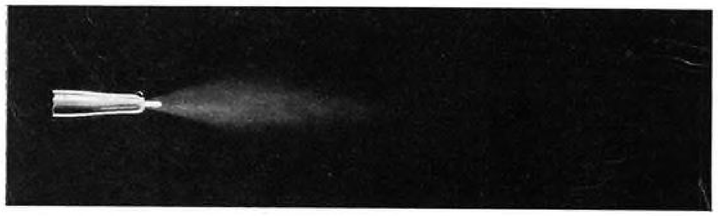

Fig. 7—In the oxidizing flame both the inner cone and outer envelope are smaller. The inner cone has a purplish color. Adjustment to a neutral flame should always be made from the excess acetylene side, not from the oxidizing.

The Flame.

Oxygen and acetylene pass through a suitable mixing device and the mixed gases burn at the blowpipe tip. This furnishes the source of heat for the welding.

There are three definite types of oxy-acetylene flames. One of these, known as the neutral flame, has two distinct parts, an intense white inner cone and a feathery, outer envelope. In the second type, a third cone appears surrounding the inner cone. The third type has but two parts, but the inner cone is shorter, is niched in, and is purplish in color. The basic reason for these flames is that acetylene burns completely in two definite stages.

In the oxy-acetylene process approximately one volume of oxygen is supplied from the cylinder as pure oxygen. This is sufficient for the primary combustion of equation (1), below. The oxygen for the secondary combustion, equation (2), is supplied from the air.

When exactly equal quantities of pure oxygen and acetylene are supplied to the blowpipe, a neutral flame results. In the inner cone of this flame the primary combustion is taking place. In the outer envelope, oxygen from the air is causing the secondary combustion.

If the one-to-one mixture is varied to give an excess of acetylene, the third cone appears in the flame, the excess acetylene feather. Then part of the oxygen for the primary reduction must be supplied from the air.

If, on the other hand, the one-to-one mixture is varied to give an excess of oxygen, the inner cone becomes shorter, is necked in and acquires a purplish tinge. With this type of flame, some of the oxygen for the secondary combustion is supplied through the blowpipe.

The oxy-acetylene flame is the hottest flame known. This fact is explained by a consideration of the chemistry of the flame and, since the chemistry of the flame has an important bearing on the weld, it is worth at least brief consideration.

Acetylene gas is a compound of two parts carbon and two parts hydrogen. The complete oxidation of acetylene takes place in two complete steps.

$$C_2H_2+O_2 \rightarrow 2CO+H_2+\text{Heat} \qquad (1)$$

The products of this primary combustion, carbon monoxide and hydrogen are both combustible.

$$2CO+O_2 \rightarrow 2CO_2+\text{Heat}$$

$$2H_2+O_2 \rightarrow 2H_2O+\text{Heat} \qquad (2)$$

From this it becomes evident that $2\frac{1}{2}$ volumes of oxygen are required to burn completely one volume of acetylene.

$$C_2H_2+2\tfrac{1}{2}O_2 \rightarrow 2CO_2+H_2O+\text{Heat} \qquad (1) \text{ and } (2)$$

In oxy-acetylene welding, part of the oxygen required for complete combustion is supplied from the air, as explained above.

The Welding Rod.

As explained earlier, the choice of welding rod for joining S.A.E. X4130 steel depends upon the base metal thickness, in general, although possible subsequent heat-treatment should be taken into consideration.

Welding Technique.

A slightly excess acetylene flame adjustment is recommended for welding with either of the welding rods mentioned and X4130 base metal. One important reason for this is that the slight amount of carbon in the flame has a fluxing action which is of considerable aid in reducing surface oxides; yet such a flame adjustment does not cause carbon pick-up by the base metal. The presence of surface oxide and the fact that the flame adjustment may fluctuate slightly strengthens the argument in favor of a slight excess acetylene feather in the flame. An added advantage of the slightly excess acetylene flame is that it minimizes the overheating of the base metal, and, frequently, the creation of a sharp enough temperature gradient in the base metal to cause the formation of martensite is avoided. (A warning regarding welding operators should be injected at this point. An oxidizing flame is hotter than a slightly excess acetylene or neutral flame. Frequently an operator, in an effort to speed his work, will allow his flame to become slightly oxidizing. This indicates that an effort should be made to give the operator more of an understanding of the effect of the flame upon the resulting weld.)

There are three techniques of weld-metal deposit in use in aircraft welding: forehand ripple, backhand, and "scale" welding.

Forehand Ripple Welding.

In this method the blowpipe is held in the right hand and rod in the left (for a right-handed operator) and the direction of welding is from right to left, thus placing the flame between the completed portion of the weld and the welding rod tip. The puddle is maintained continuously and, in light gauges, metal from the welding rod is added intermittently as needed.

There are one or two things regarding this technique which should be pointed out. The edges of the base metal should be melted first and the puddle thus moved forward. The molten puddle should never be allowed to flow forward onto solid edges as the metal will then not weld. In butt welds this melting of the edges ahead of welding must be done all the way through to the underside of the base metal.

In any welding the flame should be held so that the inner cone no more than just touches the surface of the puddle. It is in the inner cone that the primary combustion is taking place and "digging" the inner cone into the molten puddle will cause oxidation of the steel.

At no time during welding should the air be allowed to touch the white-hot or molten metal. The outer envelope of the flame provides a protection against oxidation and this protection should not be removed until the weld has cooled down at least to a red heat. Drawing the inner cone back away from the weld allows the metal to cool, yet still provides protection against oxidation.

Backhand Technique.

In this method the blowpipe and rod are held the same way, but the direction of welding is from left to right. The advantage is that the flame can be made to play more directly on the basemetal edges ahead of the welding puddle, speeding the welding. The ripple effect at the top of the weld, produced more by the welding rod than the flame, may be somewhat coarser than with forehand welding but not excessively so. The same general precautions as to thorough fusion and avoidance of oxide apply as in forehand welding.

"Scale" Welding.

In this welding method, which can be performed either forehand or backhand, the welding puddle is not maintained continuously. A puddle is created, some welding rod added and the puddle enlarged, and then the flame is withdrawn and the puddle allowed to solidify. Thereupon, a new puddle, overlapping the first is created and the operation repeated.

"Scale" welding is a special-purpose technique developed for use in making fillet welds in which distortion or overheating of a thinner section becomes a problem. An example of a circum-

(Turn to page 210)



Fig. 8—In forehand technique (for a right-handed operator) welding progresses from right to left. The flame and welding rod are moved alternately from side to side to allow the flame to prepare the metal edges ahead of the welding action.



Fig. 9—For a right-handed operator, the welding flame is directed back at the completed weld and the action proceeds from left to right. Because the rod is between the flame and the weld, the welding action can proceed more rapidly than in forehand welding.



Fig. 10—Scale welding, so-called because the completed weld has the appearance of fishscales, is a special purpose technique. To allow each successive weld puddle to cool, the flame is drawn back. The weld should be continuously protected by the outer flame envelope from oxidation.



Fig. 11—For attaching light gussets and for other similar welds, scale welding minimizes distortion and makes it easy to avoid overheating. Scale welding should be used only for those types of joints for which it was developed. Any joint can be welded by this technique, but it is slower than forehand or backhand ripple welding.

Guiding Great Ships . . . to Successful Landings!

. . . Every 10 Seconds, along the commercial airlines marked in white, Bendix Aircraft Radio snaps into action — to complete a vital plane-to-ground contact. Hour after hour Bendix Radio Compasses guide airliners through darkness, fog, rain, sleet and snow. Over war-torn sections of the world, Bendix Radio guides military pilots on their missions. From the sub-zero north to the dripping tropics, Bendix Radio is proving its reliability . . . is justifying the care and skill which are built into every piece of Bendix Radio Equipment. Bendix Radio, *Division of Bendix Aviation Corporation*, Baltimore, Md., U. S. A. Cable Address: Benrad.

AVIATION SKETCH BOOK OF DESIGN DETAIL

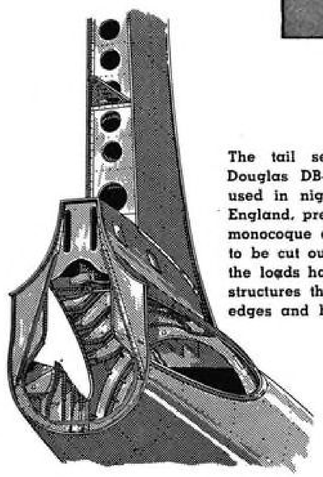

The tail section supporting the fin on the Douglas DB-7 attack bomber, left, now being used in night fighter and other operations in England, presents an excellent example of semi-monocoque construction. Large areas have had to be cut out for insertion of the stabilizers, but the loads have been carried into the supporting structures through the combination of reinforced edges and bulkheads.

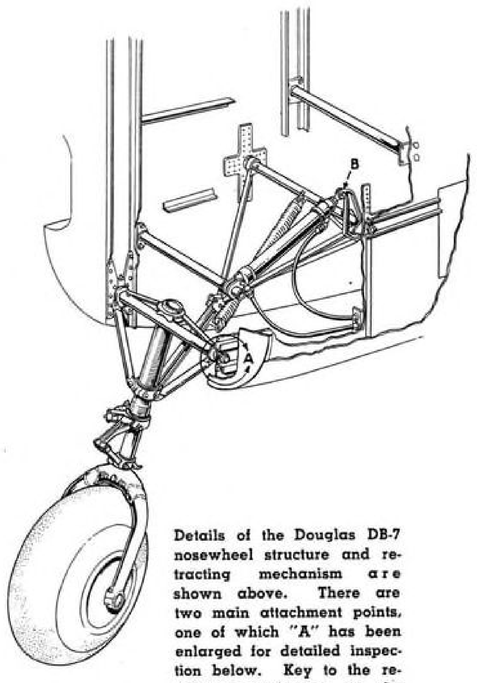

Details of the Douglas DB-7 nosewheel structure and retracting mechanism are shown above. There are two main attachment points, one of which "A" has been enlarged for detailed inspection below. Key to the retracting mechanism is the small torque arm "B" which is actuated by the hydraulic cylinder. In retraction, the Y-strut breaks at the joint and the nosewheel gear swings backwards through the T-beam attached at "A".

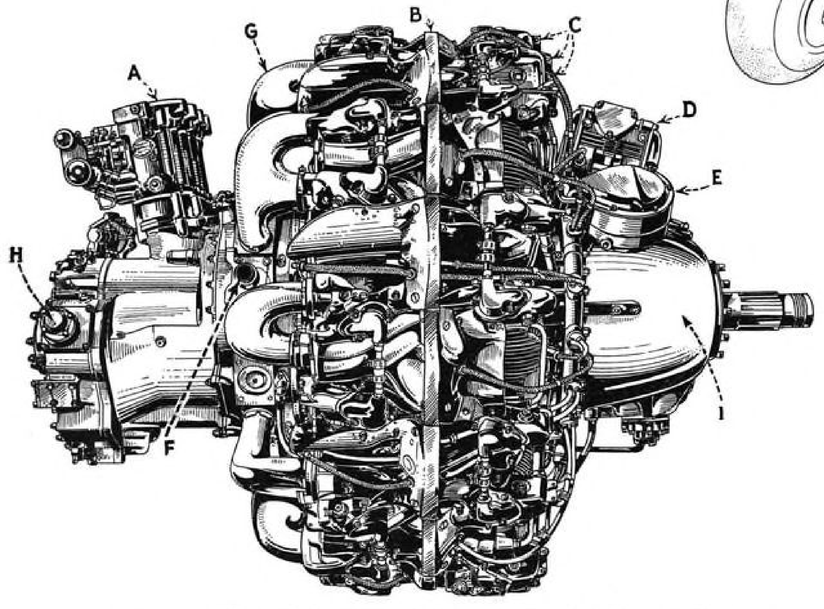

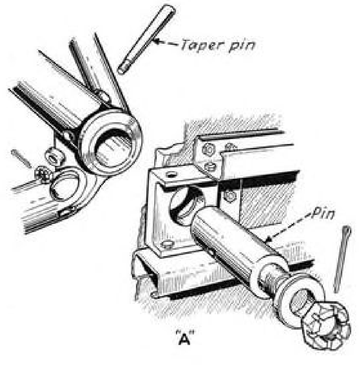

The Pratt & Whitney Double Wasp R-2800 is shown above. "A" is the carburetor intake leading to the single stage supercharger. "B" are the newly designed dural baffle plates which seal the periphery of the cowl and the area between the cylinders so that the air is forced directly into the fins of the rear bank of cylinders. "C" are the cowl mounting lugs; "D" is the dual magneto, and "E" the distributor. "F" is an engine mounting bracket. The stainless steel intake pipes "G" are of fork construction and are made in halves. A gun synchronizer drive is located at "H", and "I" is the reduction gear housing.

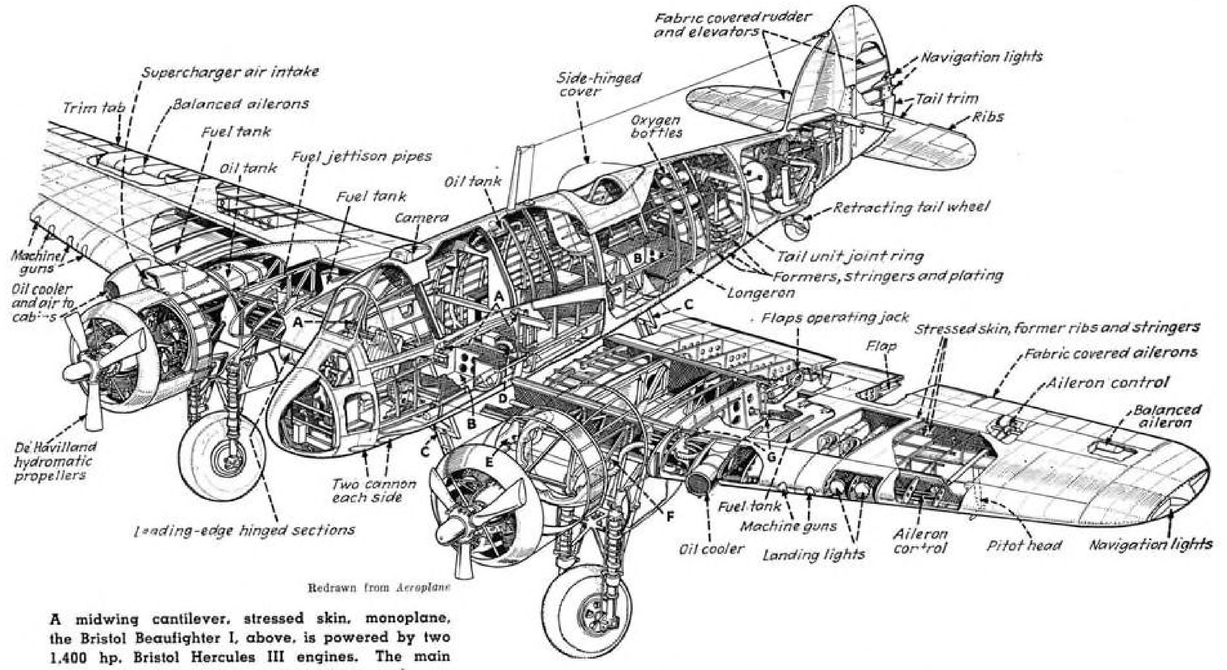

Redrawn from *Aeroplane*

A midwing cantilever, stressed skin, monoplane, the Bristol Beaufighter I, above, is powered by two 1,400 hp. Bristol Hercules III engines. The main components—center plane, outer wing panels, engine nacelles, landing gear, fore end, rear fuselage, stern section and various aerodynamic surfaces—come to final assembly from various "shadow" factories. The fuselage has six main points of attachment to the center wing section, three of which are indicated at "A". An interesting feature is the "escape" hatch "B" which has a tip-up floor "C" acting both as an entrance ladder and emergency exit chute. The cannon are heated by warm air carried by a pipe "D" from the engines. Air from the inlet in the oil cooler is heated in the exhaust manifold "E", and the operating ram for the landing gear is shown at "F". The outer wing panel has four main attachment points, two of which are indicated at "G". Only 2 guns in the port wing.

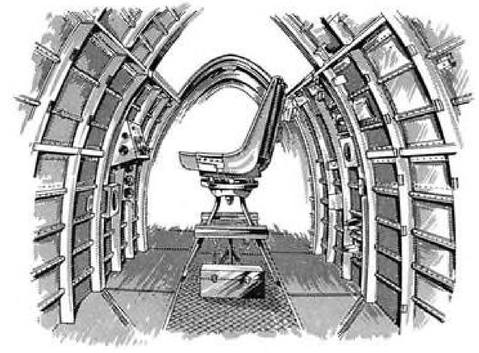

The Beaufighter departs from the usual aluminum alloy, semi-monocoque design only in that it has two keels, partly shown in the sketch above, running the length of the fuselage. The legs of the rotating seat for the observer are mounted on these keels. Stringers are bulb angle extrusions which intersect the transverse Z-section frames at cut-outs.

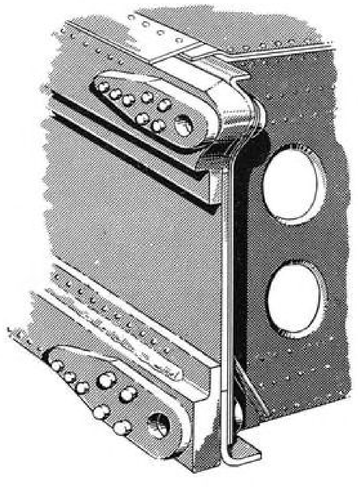

At left is shown the end spar of the Bristol Beaufighter center wing section to which one of the two outer wing panel spars is attached by bolts, top and bottom. The top bolt passes through projecting arms from outer wing spar which fit over the center section spar bolt hole. On the bottom attachment, however, in place of the projecting arms, a connecting plate is used in bolting the two spars together.

Spar construction, an end view being shown at right, of the Bristol Beaufighter is unusual due to advances in extrusion practice. The web is of flat sheet and the booms are heavy extrusions of nearly rectangular section (about 3 x 1 in.) with a lip on one side for riveting to the web. Material used is aluminum alloy. (Spar sections redrawn from *Aeroplane*)



AVIATION SKETCH BOOK OF DESIGN DETAIL

VICKERS

OIL HYDRAULIC MECHANICALLY OPERATED SEQUENCE VALVES

Positive and Automatic Control for Sequence of Operations

• • •

Used in aircraft oil hydraulic circuits to control the sequence of operation of cowl door operating cylinders and landing gear operating cylinders (or other similar sequences). Operating cycle is automatic and is arranged so that doors must be entirely open before gear starts down . . . and on reversal, so that gear is completely retracted before doors begin to close.

These valves are simple, rugged, compact and light weight. Ease of maintenance is another feature: valve can be completely dismantled without disturbing piping or removing from installation.

Engineers and Builders of Oil Hydraulic Equipment Since 1921

VICKERS *Incorporated*

1462 OAKMAN BLVD. - DETROIT, MICHIGAN

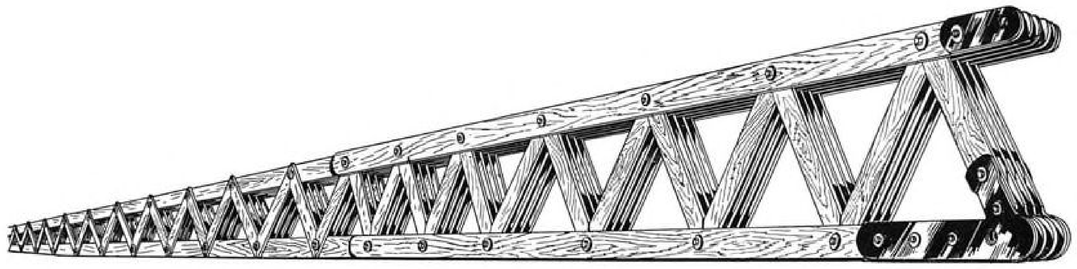



Along with the development of a plastic bonded plywood process in England has come a unique spar joint, left, designed to transfer the loads from one member to another most efficiently. With the shear strength of wood being so low, compared to its tensile strength, the common method of a hole and pin is not very effective when an elastic joint is desired. In place of this, interlocking dowels "A" have been used. In one flange a groove "B" is made into which is inserted a ring "D" which locks in a similar groove "C" in the adjacent web member. This method transfers the load straight from one member to another and the joint always gives central loading on compression members. Then, to hold the assembly together, as shown in the drawing, a bolt is fitted through the center "E". Above is shown a spar constructed by this method.



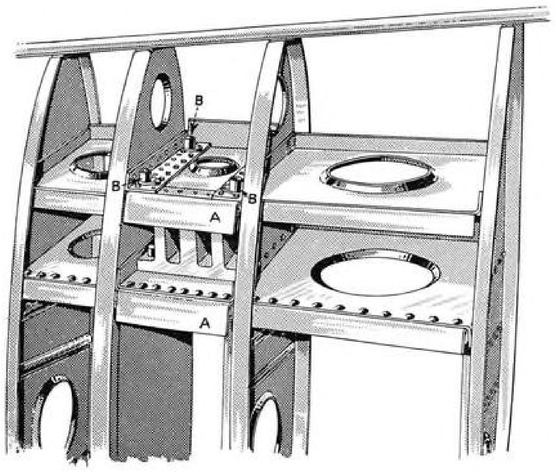

Constructed entirely of phenol resin bonded plywood, with Plaskon resin glue used for all joints, the Wollam Plywood Float, below, is a semi-monocoque structure with internal bracing and water tight bulkheads. Designed for a gross displacement of 1,360 lb., the new type floats use 5-ply birch material for bottoms, and 3-ply for sides and decks. Rigidity and torsional stiffness is insured by use of an ash keel and chime stringers, with spruce stringers on sides and top deck. A fixed brace structure of welded tubing permits a quick change from wheels to floats, and to waterproof the float structure Bakelite varnish finishes are applied.

The wing section drawing, above, of the Fleetwings Model 33 trainer, shows installation of the landing gear jig. The bulkheads forming the landing gear socket are riveted in place with this jig installed to insure accurate fit. Heavy reinforcement strips "A" are of .093 gage extruded angle. Steel stop nuts "B" serve to hold four through bolts, which are the only landing gear attachment. These bolts are accessible from an access door in the underside of the wing just aft of the landing gear strut.

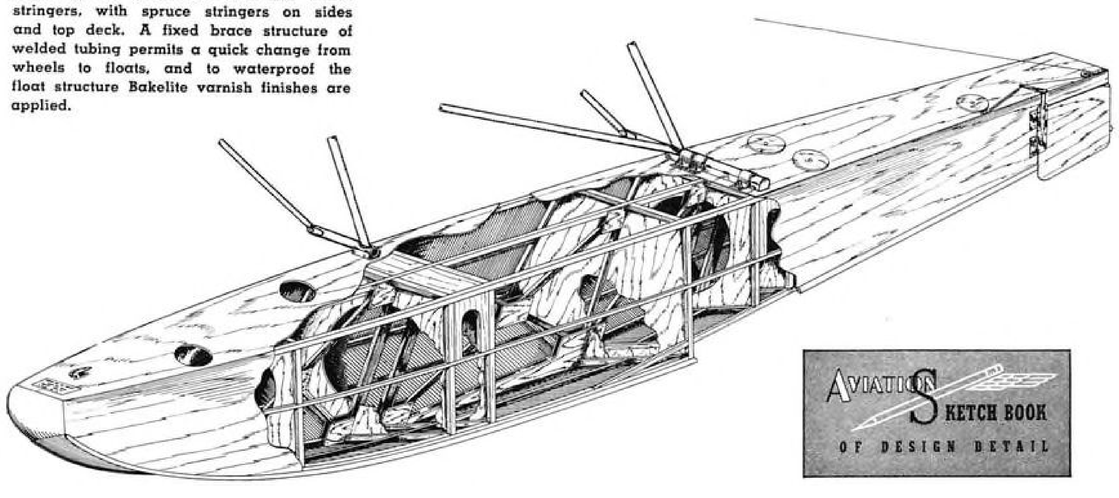

AVIATION SKETCH BOOK OF DESIGN DETAIL

Aviation — RADIO

Dialing the Air Waves with Craig Walsh

Radio Maintenance At United Air Lines

The complications of radio equipment require that where life and safety are concerned it is essential that elaborate precautions be taken to insure that the many pieces of radio apparatus used in a modern airliner continue in normal operation while the plane is in flight. The United Air Lines has attacked this problem by establishing radio-electric shops at LaGuardia Field, New York, Chicago, Salt Lake City, and Oakland. These are in addition to the main overhaul and installation base at Cheyenne. Also, spare equipment is kept ready for use at all of the other stations where a unit which goes bad may be immediately replaced. The defective unit is then forwarded to one of the repair shops. This company also maintains a radio development laboratory at Chicago so that its radio systems are continually being improved and put to new uses.

Each United Mainliner carries three radio receivers and one combination receiver-transmitter. Plans call for the use of two additional receivers and another combination receiver-transmitter for ultra-high frequency operations.

Certain checks are made of the Mainliner's various antennas and radio equipment at every stop and at the end of each flight. In addition, there are visual and mechanical inspections and operational tests of all components of a Mainliner's radio equipment after every 40 and 125 hours of flight. Such inspections and tests are conducted at United's major service stations. Then, at the end of every 700 hrs. of flight, all radio equipment is removed and completely overhauled in the radio-electric shop at the Cheyenne maintenance base.

Thirty-six highly skilled mechanics work with the most modern equipment in the Cheyenne shop, minutely inspecting all radio equipment and adding any necessary new parts. Thorough performance tests are also conducted.

It is interesting to note that all equipment necessary to do navigation and reception is duplicated in some manner. For instance, the plane can receive information over its regular receiver or over its beacon receiver. If one should fail the other is there for emergency use. If the direction finder should cease to function, the pilot can still locate himself by means of the radio compass. Also, if the beacon receiver should fail, the radio compass and the direction finder will enable the pilot to navigate.

After a radio receiver or transmitter is overhauled, it is given a vibration test to simulate normal operating conditions and measurements are made of its characteristics while it is vibrating. In this way any loose connections or loose parts are detected before they can do any harm. If the tubes perform properly in this test it is known that they are in good condition and that they do not need replacement. It is interesting to note that new radio equipment purchased or built by United Air Lines not only must meet certain mechanical requirements, but also must pass severe tests if these have not already been conducted by the manufacturer. Such tests include four hours on a vibration table at frequencies of from 30 to 60 cycles per second and at amplitude sufficient for a vertical acceleration of 10 Gs.; 48 hrs. in a humidity chamber at 95 deg. humidity and temperature of 50 C.; a temperature test in which the equipment is subjected to temperatures ranging from +55 to −35 deg. C.; a test in an altitude chamber at variable pressures from sea level to 31,000 ft., and a drop test in which the equipment is subjected to at least 100 free drops of from 16 to 18 inches.

Azimuth Indicator for Ground Stations

For a number of years direction finding equipment using the directional loop has been used to enable airplane pilots to determine their positions under conditions of poor visibility. Because of the necessity of a skilled operator to work the equipment and the time required to make a reading it was necessary for the plane to make a special transmission for the direction-finding determination. Apparatus which will determine a plane's direction instantly and automatically has been developed by Bell Telephone Laboratories according to the *Bell Laboratories Record* for November. It is an azimuth-indicating radio receiver, operating in the 2 to 7 megacycle band, which gives a visual indication of the direction of the source of any radio waves to which the receiver is tuned. The collector, or antenna, system may be located at a site free from electrical noise, while the indicator panel may be located at a regular operating point where personnel is available for observing the directional indications.

The antenna system consists of four vertical dipoles located at the corners of a square with a fifth dipole at the center. The four corner antennas are used for determining direction. The center antenna serves as a reference of radio-frequency phase to permit differentiation between directions 180 degrees apart, and also it receives the normal communication signals. This form of antenna responds only to the vertical component of the electric field, since the horizontal component is cancelled out.

Each pair of directional dipoles is connected to the input of a pair of modulators which are also supplied with an audio-modulating frequency. The carrier and modulating frequency are both suppressed only the side-bands remain. The outputs of the directional modulators, together with the output of the center antenna, are then combined and passed to the radio receiver. The three components are separated at the output of the receiver and the signal is fed to a loudspeaker, and the two directional components to the plates of a cathode ray tube. The cathode ray tube has two pairs of deflecting plates at right angles to each other. The rectified output of one pair of dipoles tends to deflect the spot along the line of one pair of plates and the output of the other pair of dipoles along the line of the other pair of plates. The indication on the screen will then be a straight line whose direction depends upon the relative strengths of directional signals applied to the deflecting plates. If there were only the two directional sidebands at the detector input in the radio receiver there would be uncertainty between directions 180 degrees apart. The output of the center antenna, however, which is present with the two directional sidebands, serves as a reference of sign, with the result that the bearing is correctly indicated at all times during the flight.

The receiver has facilities for choosing any one of ten frequencies used for aircraft communication. Any of the ten frequencies may be selected by a dial which is similar to the ordinary automatic telephone dial, and a light in a bank of lamps indicates which frequency is being received.

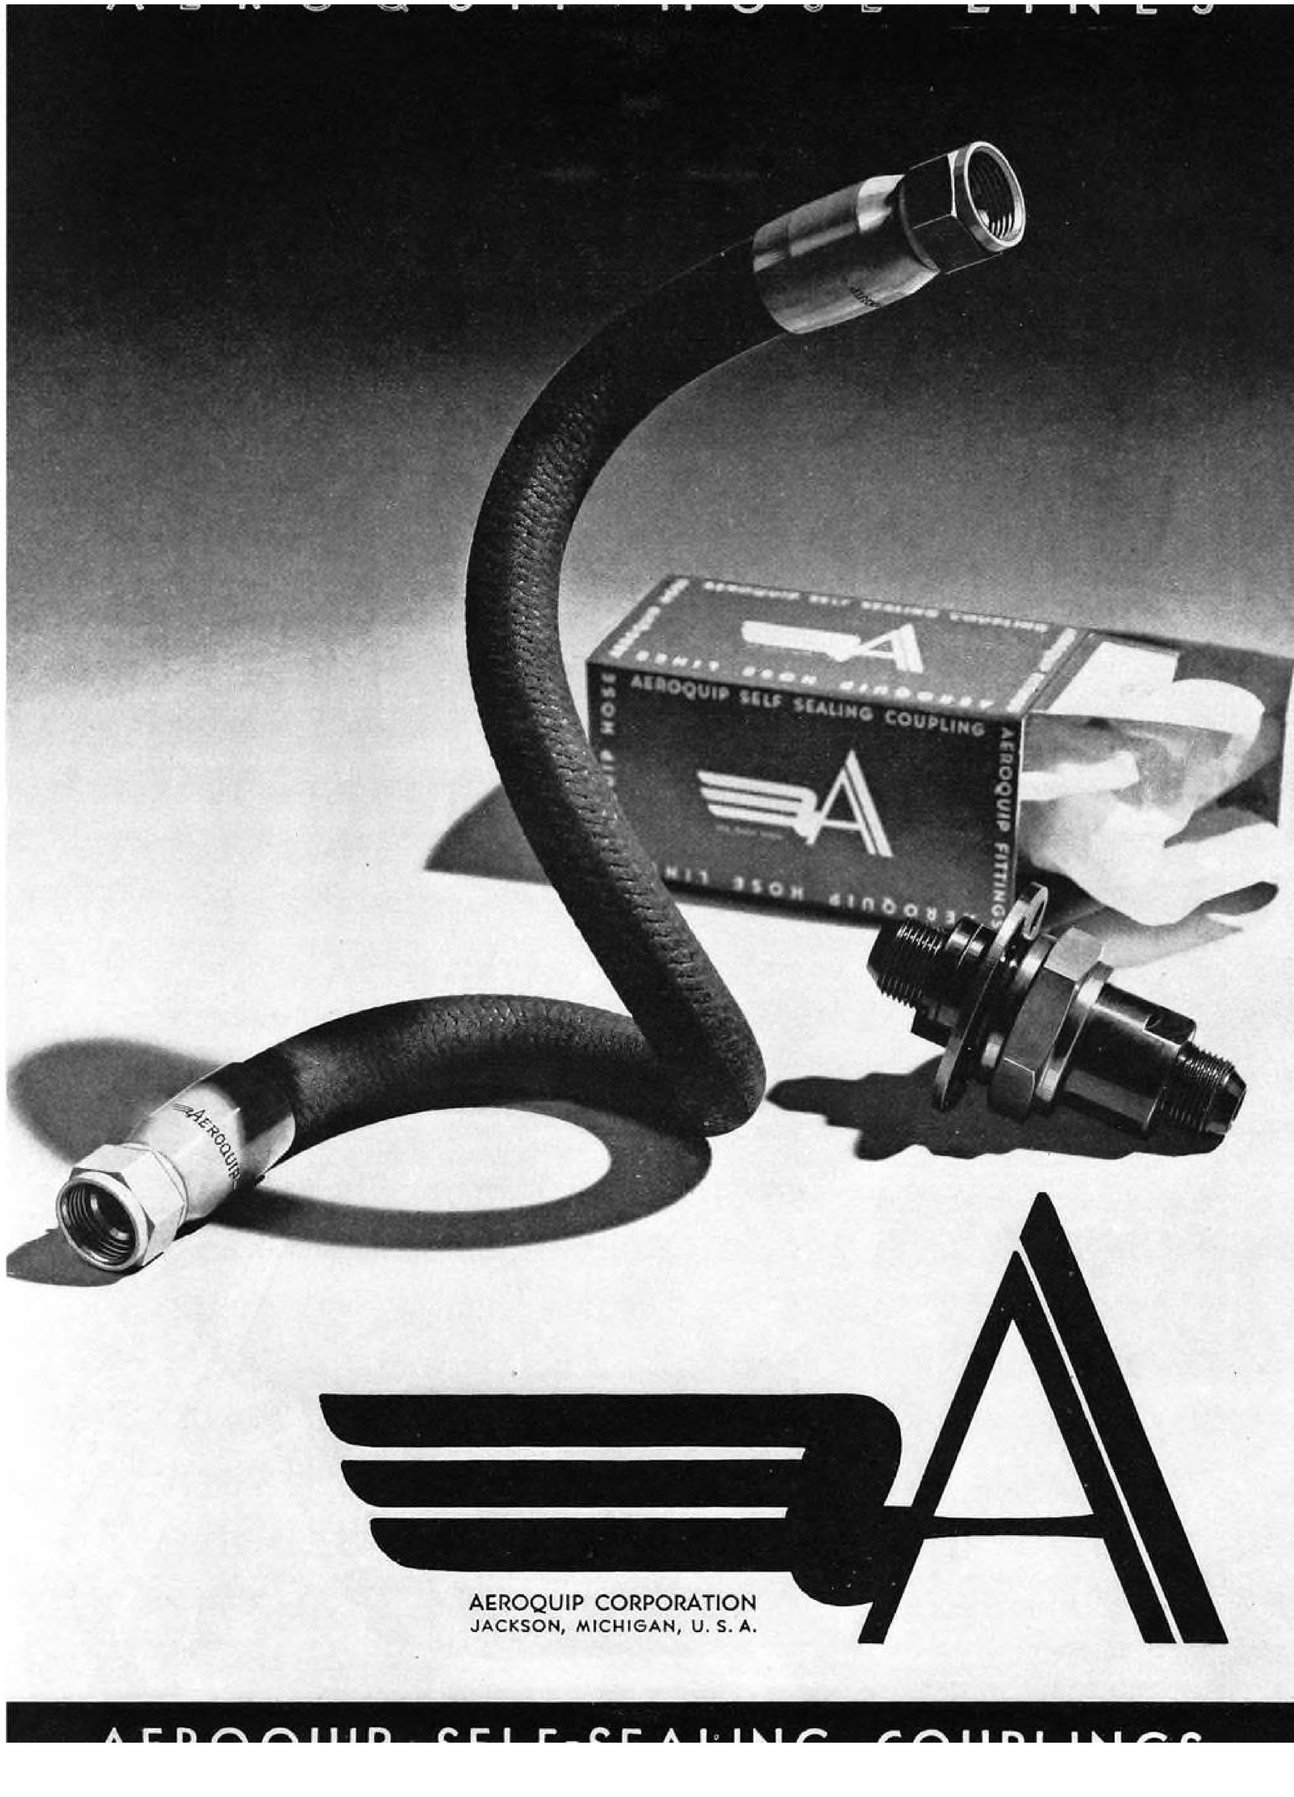

Aviation's Changing Trends

By Selig Altschul

WHILE air line securities were sharply lowered on the news of the twin plane crash, this weakness proved to be of a temporary nature and the group showed remarkable resiliency in recuperating most of its losses. In years gone by, a plane disaster depressed air line equities for a sustained period and required considerable time to refurbish investor confidence in the industry.

This changed market behavior is far more significant than a mere speculative gyration. The stock exchange is not only a medium through which securities are bought and sold, but to many it is a barometer and a reflection of informed opinion—opinion which backs its judgment with hard cash. Viewed in this light, the present action of air line equities is encouraging to those who are optimistic as to the near-term and future outlook of the industry.

It was a number of accidents late in 1940 together with poor flying conditions during the early part of 1941 which were primarily responsible for the inferior industry earnings reported for the first half of this year. The market sensed these and other restrictive factors and air line securities declined in anticipation of the declining earnings as subsequently confirmed by published reports.

The relative firmer markets prevailing after the recent plane distasters may in part be due to the minimum of "scare" publicity present as compared with that generated by previous catastrophes. More deserving of the headlines were more momentous events of the times such as the torpedoing of an American warship and the belligerent attitude of John L. Lewis. Probably of greatest importance is the basic recognition that air transportation is too firmly established to be seriously retarded by occasional plane crashes. In this instance, there was again present the tendency of traffic to decline. To what extent this may be attributed to the accidents may be difficult to determine. The seasonal decline had already set in and bad weather was responsible for many flight cancellations. The traffic levels in the months immediately ahead will provide a more accurate test of the effects of the October disasters. The exigencies of defense activity, however, may continue to bolster air line travel regardless.

The individual air line equities showed diverse trends and surprisingly enough the equities recording the greatest losses were not of the companies involved in the accidents.

Eastern Air Lines in recent weeks has been particularly "heavy"—this despite the fact that the company is shortly about to enter its highly profitable season. Investment trust managements appear to be confused in their attitude towards this company. For example, during the third quarter, two investment trusts, including the Lehman Corp., purchased a total of 5,200 shares of Eastern. On the other hand, during this same period, three funds, including State Street, sold an aggregate of 8,200 shares of this stock. The gradual decline of Eastern in past weeks may be belated recognition of pending developments.

The CAB in a recent action denied Eastern's petition to dismiss the application of other carriers for route certificates which would create intense competition for the company. It is not generally appreciated that a large measure of Eastern's success stems from its lack of competition. This advantage is twofold: The company has a virtual monopoly on the business in its area—and operating costs—particularly sales expense, are lower. Should present regulatory trends continue, it is likely Eastern's monopoly ultimately will be no more. The CAB in previous decisions has sought to encourage a certain amount of competition between the various lines.

Long overdue is the examiner's report on Eastern's mail rate structure. In view of the uncertainty created by a similar report on American Airlines and the forthcoming clarification expected from the CAB on this issue, considerable anxiety will be present until this rate question is settled.

As a matter of fact, the entire air transport industry will be vitally affected by any rate formula enunciated by the CAB. The whole problem has been further complicated by the introduction of a Brookings Institution study which suggests that the CAB exercise its full rate-making authority to revise air passenger fares. This recommendation is pertinent in the case of Eastern, as that carrier appears to be less dependent upon mail revenues than any other air line and yet has shown highly profitable operations.

A passenger rate reduction ordered for one air line will probably set a precedent for the industry and can unleash untold repercussions. For example, lower passenger fares will hurt the unprofitable lines which may then require higher mail pay to meet their deficits. Lower air rates will probably draw much more business from the ground carriers and this may conflict with the public interest by adding to the woes of the railroads, for example. Yet, it is difficult to see how this conflict can be effectively avoided. Regardless of official CAB action, it is likely that in a post-war period, improved airplane construction and design, and expanded personnel will all be at the disposal of commercial aviation. The natural result is a substantial reduction in operating costs—which in turn will make possible lower rates all along the line. Under those circumstances, how secure is the approximately $100,000,000 now going to the railroads annually for mail compensation? What of the $417,000,000 in yearly passenger income now received by the railroad industry? More importantly, how much of a dent will the air lines make in the $35,000,000,000 in freight revenues paid the steam carriers last year? The potential to the air lines is indeed staggering when it is realized that for 1940, the industry's total gross revenues from all sources aggregated but $75,000,000.

In any event, the air transport industry's future progress and development will be shaped by official actions emanating from the CAB. Until greater certainty as to a regulatory policy is established, first one company and then another will be on the anxious seat awaiting final judgment.

The favorable action of American Airlines may not only reflect its highly favorable trend of earnings but may also indicate that the company may not be required to return part of its 1940 earnings as recommended by a CAB examiner. (This whole question was reviewed in detail in the August issue of AVIATION). Since the release of this examiner's report, no end of discussion and apprehension has been created on the subject and the final CAB findings in this matter will not only be of vital import to America but will establish a momentous decision for the industry as a whole.

The most backward, marketwise, of the major air lines has been TWA. As there has been consistent buying in this stock by the Hughes Tool Co., it may be safe to surmise that this issue, without such support, would have been selling at much lower levels. Latest reports show Hughes as owning 416,650 shares, or 44 percent of the total 950,000 outstanding. A glance at the company's

(Turn to page 214)

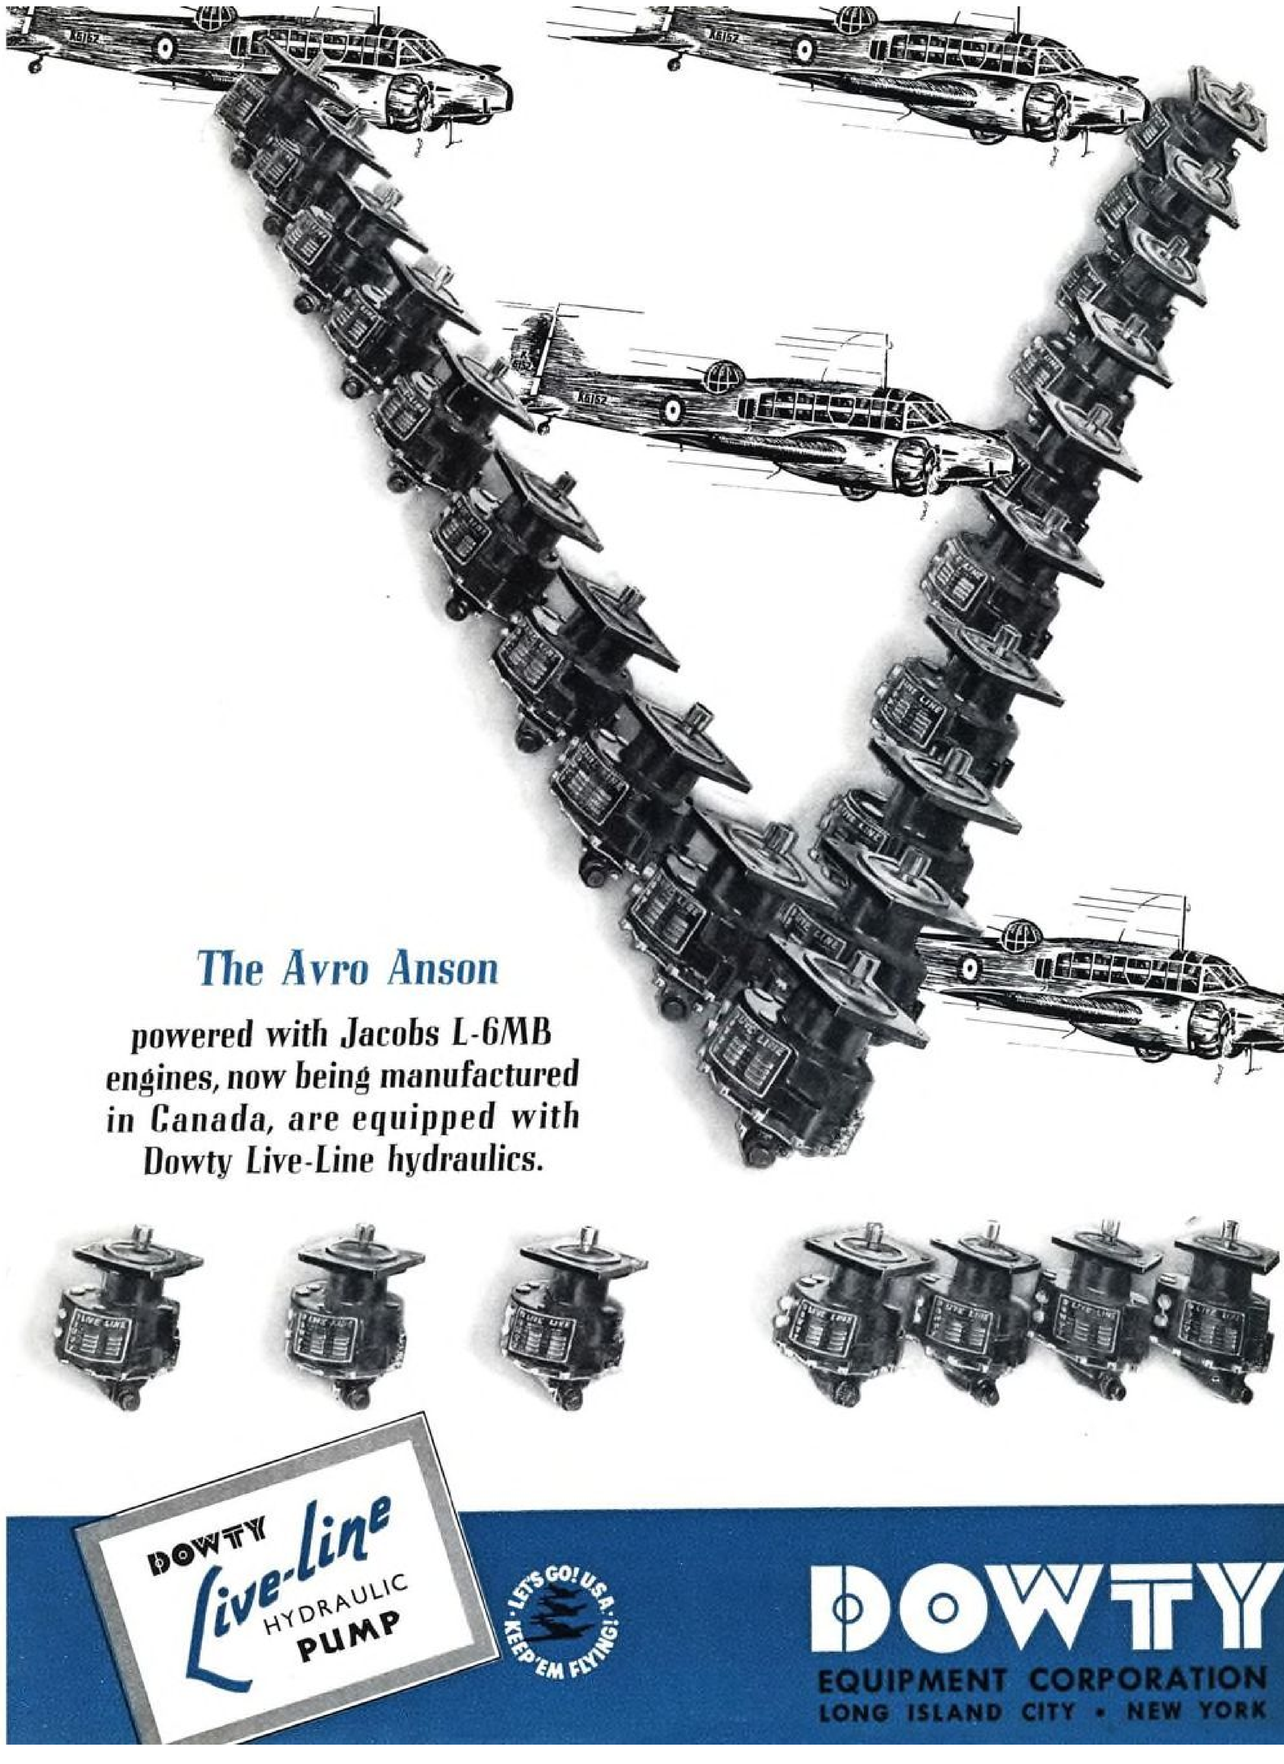

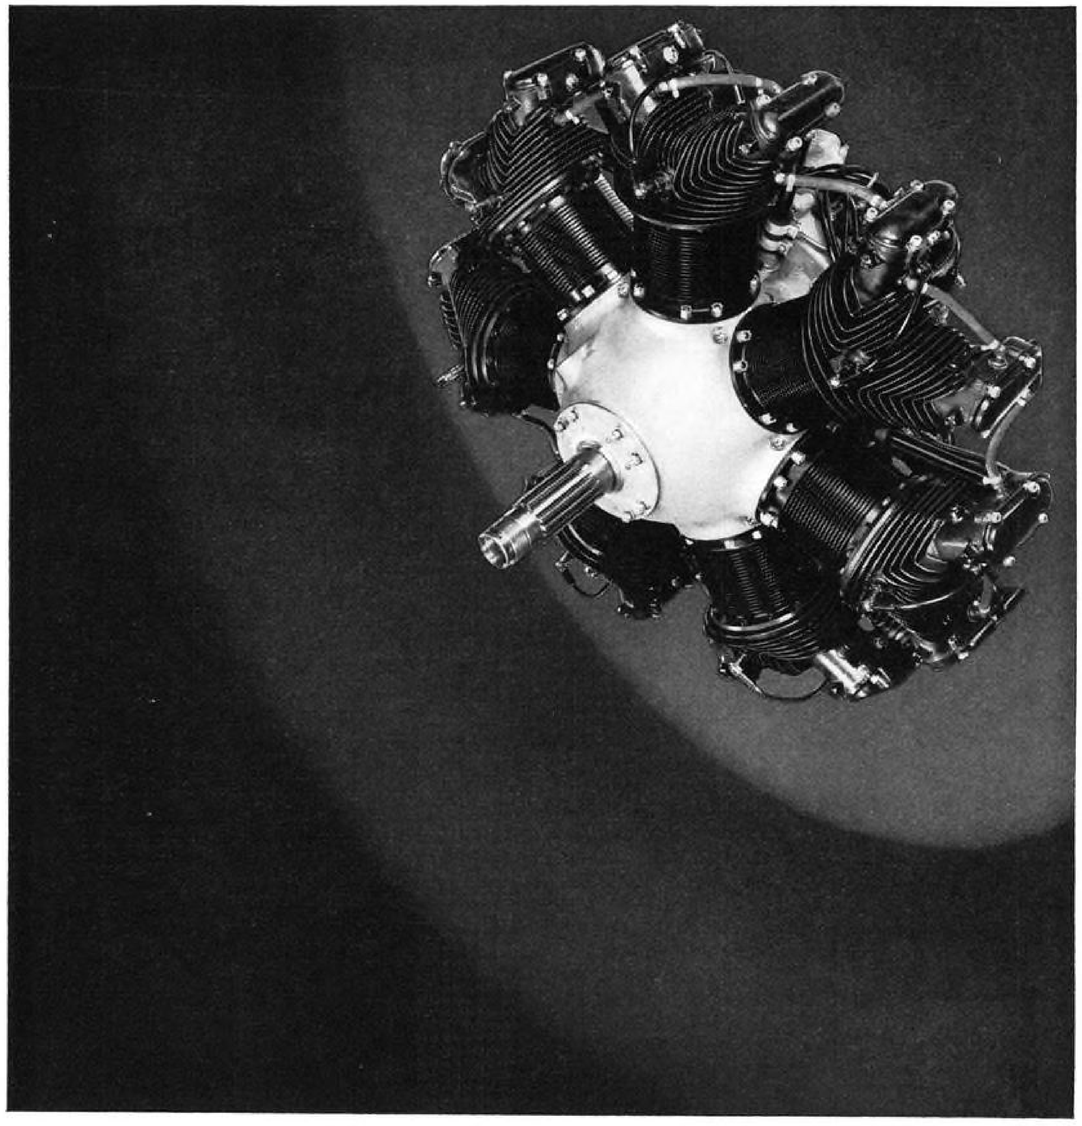

WARNER

AIRCRAFT ENGINES

125 H. P. • 145 H. P. • 165 H. P.

WARNER AIRCRAFT CORPORATION • DETROIT, MICHIGAN

What's your outlook for '42?

MILLER-IVANHOE asks...

- Has defense put your plant on night work?
- Do you have to hold high precision on subcontracts?
- Impossible to get trained "help" and new machines?

PRIME CONTRACTORS AND SUBCONTRACTORS:

There is no excuse for being "slowed down" by poor lighting today. Not when you can have 50 foot candles or better in your plant with IVANHOE "50 FOOT CANDLER", IVANHOE "100 FOOT CANDLER" and MILLER TROFFERS for your office — the *original* continuous wireway fluorescent lighting systems.

Five years ago you couldn't buy this grade of "seeing" at any price. Today it will cost you a small fraction of a cent per man-hour . . . to return greater and better production measured in dollars.

In case after case . . . in defense plants of all kinds, large and small, handling a wide variety of products . . . and under varying conditions, these guaranteed continuous fluorescent lighting systems have actually *proven* their ability to deliver these benefits. Today lighting experts pronounce them "*the new lighting standard for industry.*" They can definitely help you. Wire for helpful facts.

Prompt Deliveries—Superlative Service

We are constantly striving to keep deliveries moving smoothly, fast and ahead of building schedules. And no major installation goes in without a Miller-Ivanhoe engineer on the scene . . . to live with the job until it is operating with maximum results for you.

IVANHOE "50 FOOT CANDLER" and IVANHOE "100 FOOT CANDLER" give:

HIGHER ILLUMINATION — 50 to 100 foot candles—for faster, better production—greater worker efficiency.

30 TO 50% LOWER INSTALLATION COSTS —Fixtures contain up to 80% of necessary conduit—make defense dollars go further.

FASTER INSTALLATION — Steps up building schedules —plants get into production quicker.

UNIFORM LIGHT DISTRIBUTION — Production equipment can be moved at any time without necessity for changing lighting.

SIMPLIFIED MAINTENANCE — Easy to clean, removable porcelain-enamel reflectors—save valuable man-hours for production.

ALLOWANCE FOR FUTURE LIGHTING NEEDS —Illumination increases up to 45% practical without new fixtures—lower obsolescence.

THE MILLER COMPANY

MERIDEN, CONN.

Pioneers in Good Lighting Since 1844

• MILLER OFFERS A COMPLETE LINE of incandescent and fluorescent lighting equipment, backed by almost 100 years of commercial and industrial lighting specialization. There is an answer to your problems in this *unbiased* lighting service.

BUYER'S LOG BOOK

What's New in Accessories, Materials, Supplies, and Equipment

Refrigerated welding has been made commercially available by *Progressive Welder Co.*, 3050 E. Outer Drive, Detroit, Mich., in the development of refrigerating units for spot welding machines. When used in combination with spot welders, the unit reduces electrode temperature to a point where, in spite of the high heat necessary to produce a weld, the electrodes will be continually covered with frost. This temperature reduction is said to have so increased point life that 10 minute runs, continuously, at 100 welds per minute without point dressing are not unusual for the combination of a Progressive 3-phase aluminum welder and the new refrigerating unit. It is also available for other makes of aluminum and stainless steel welders.—AVIATION, *December, 1941.*

Crater eliminator for arc welding is announced by *Wilson Welder & Metals Co.*, 60 E. 42nd St., New York, N. Y., in its "Stroco" Electric Arc Crater Eliminator for use where presence of typical crater at the end of a weld deposit is objectionable. The "Stroco" Crater Eliminator is an auxiliary device mounted on body of the arc welding generator. Control is by means of a 3-position button located on electrode holder. During usual progress of the weld, switch is in neutral position and device is entirely inoperative. When operator is about to break his arc either because he is approaching the end of one electrode or end of one weld, he presses button backwards into the "On" position. This brings the "Stroco" Crater Eliminator into play and causes the arc to fade out gradually until arc voltage becomes so low that it can no longer deposit any metal. Where sections being joined become smaller so that it is desirable to reduce current density for limited period, button can be retracted to make slight reduction in welding current, then advanced to "Off" so remainder of weld can be completed with reduced current. Or, if return to original current is wanted, relèase of pressure on button will let it swing into neutral which will cause increase of current to original value.—AVIATION, *December, 1941.*

For high pressure installation from 1800 to 2500 lb., the Ashcroft Power Control Valve is announced by *Consolidated Safety Valve Div.* of Manning, Maxwell & Moore, Inc., Bridgeport, Conn. The new power control valve is said to effect a large saving over the 4 percent required for the spring loaded safety valves. Immediate results are more accurately balanced boiler operation at peak loads and more uniform line pressure. Principle of operation of the Ashcroft Valve is as follows: Boiler drum or superheater outlet pressure or steam header pressure actuates a pressure control set at popping pressure, which operates an electric contact on difference of pressure of 1 percent or less. Electric current is transmitted to a solenoid which opens and closes the pilot valve. When it opens it unbalances pressure over main valve disc and it opens and remains open until pilot valve is closed. Whole cycle of operation is almost instantaneous. Power control valve opens exactly at popping pressure and closes cleanly with extremely low blow-down. The Ashcroft Valve is intended as a supplementary operating valve to conserve power of steam plant.—AVIATION, *December, 1941.*

New Fire Wall Sealer, made by *Presstite Engineering Co.*, 3900 Chouteau Ave., St. Louis, Mo., is used in sealing the joint of the fire wall assembly in certain military planes. In liquid form, compound is easily applied with a brush and it is claimed to set and dry to a tough, permanently flexible, resilient, rubber-like body. It is said not to be affected by oil, gasoline, grease or water, and is used for preventing gases, fumes, oils, etc., from entering pilot's cockpit.—AVIATION, *December, 1941.*

The new defense material, Ameripol Synthetic Rubber, has been successfully compounded in the laboratories of *Miller Rubber Co., Inc.*, Akron, Ohio, in accord with new exclusive formula which is said to make it the ideal molding material for oil seals, v-type packings, accumulator diaphragms and all parts on airplane hydraulic systems. It is particularly noted for its resistance to sub-zero temperatures, exceptionally low oil absorption, low friction, and ability to be fabricated to close tolerances and high resistance to metal corrosion, heat, light and ozone.—AVIATION, *December, 1941.*

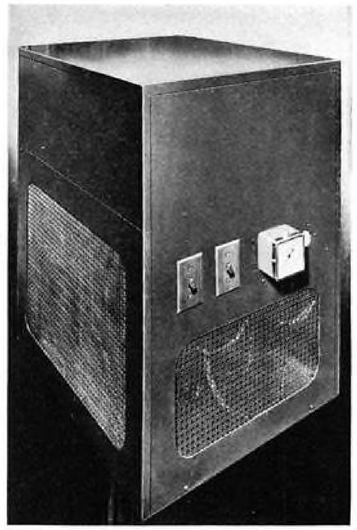

Progressive refrigerated welding unit



Wilson "Stroco" Arc Crater Eliminator



Cons. Safety Ashcroft Control Valve



Miller molded Ameripol parts

Speed
—In An Industry That Has Shattered All Speed Records

"Clark" Fork Truck, unloading motors for Lockheed at Burbank, Calif. This machine lifts 3 tons, carries the load at 7 m.p.h., tiers it to 104 in. in 15 sec.

Three-wheeled "Clarkat" towing commissary trailers loaded with freshly prepared meals for United Air Lines "Mainliners" at Salt Lake station. "Clarkat" is built in two sizes, towing as much as 40 tons.

"Clarktor-6" four-wheeled tractor, about to tow 8-25 Twin Engine Bomber onto flight ramp at North American Aviation Co., Inglewood, Calif.

SPEED

in production
in servicing
in operation

"Clarks"—fork and platform trucks and towing tractors—unload and store materials and parts, keep production machines supplied with work, tow ships in factory, hangar and airfield, service them at airports. "Clarks" are gas-powered, capable of 24-hr. continuous service. Over 70 models serving the aviation industry. Write for catalogs.

CLARK TRUCTRACTOR

Div. of Clark Equipment Co.

145 SPRINGFIELD PLACE, BATTLE CREEK, MICHIGAN

SIMPLIFY

AIRCRAFT HYDRAULIC SYSTEMS WITH GENERAL CONTROLS AIRCRAFT TYPE ELECTRIC VALVES

★

GENERAL CONTROLS MULTI-POISED *AIRCRAFT TYPE* ELECTRIC VALVES

Type PV-7 high pressure 4-way selector valve.

Specifically designed for use as anti-icing control on carburetor air intake, windshield, etc.; gasoline main line shut-off and cross feed valve; hydraulic high pressure (1500 lbs.) valve for wing flap operations; for propeller feathering; override valve for emergency operations; oil dilution valve; engine priming valve; for cabin heating equipment as fuel line shutoff valve.

★

General Controls compact, two-wire PV Valves simplify compli-cated aircraft hydraulic systems, save dead weight, save wire, save space. Multi-poised design assures positive operation in any position, under all flight conditions (no stationary magnetic valve will do this); operation is unaffected by vibration or acceleration, i.e. against substantial increases in "g." PV Valves are drip-proof,—are available waterproof. Power consumption is low; operate on D.C. Operation is fast, free of sliding parts, hence usable on highly viscous fluids. Packless construction. Available normally open or normally closed. Limited armature movement assures long life; inserted magnetic break in both poles guards against failure due to magnetic residual. Wire or write today for complete engineering details and valves for inspection and test.

Type PV-1 low pressure valve for anti-icing and carburetor control.

GENERAL CONTROLS

PIONEERS AND LEADERS IN THE DEVELOPMENT AND MANUFACTURE OF MAGNETIC VALVES

801 ALLEN AVENUE, GLENDALE, CALIFORNIA

BOSTON • NEW YORK • PHILADELPHIA • ATLANTA • DETROIT • CHICAGO • CLEVELAND • KANSAS CITY • DALLAS • HOUSTON • SAN FRANCISCO

AMERICA *ROARS* ahead on SHELL

IMPROVED designs, new and better materials, increasingly rapid strides in the aeronautical sciences, have made possible the super-speeds of the planes of today.

• • •

Playing a major part in the development of American Aviation is 100 octane aviation gasoline—produced commercially for the first time by Shell. This is the fuel that has made American military ships unexcelled in performance, speed and flying range. Proved by experts, Shell Aviation Gasolines and AeroShell Oils are preferred by many pilots.

SHELL OIL COMPANY, INC.
50 West 50th St., New York, N. Y., or 100 Bush St., San Francisco, Cal.

SHELL

AVIATION PRODUCTS

SHELL AVIATION GASOLINES . . . AEROSHELL OILS



Square D Class 9300 Circuit Breaker



Udylite automatic plating machine



Hammond Any-Angle Tool Vise

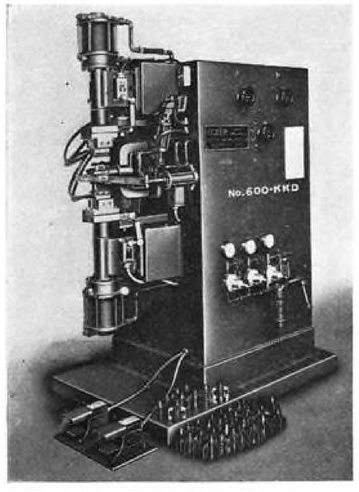

Eisler Projection Spot Welder

Designed particularly for circuit protection on aircraft by the *Square D Co.*, 6060 Rivard St., Detroit, Mich., the Class 9300 Circuit Breaker is a new combination of circuit breaker and "on" and "off" switch. Available in a variety of ranges, including 10, 15, 20, 25, 35 and 50 amp. sizes, all are offered in same small enclosure. $2\frac{7}{16}$ in. long by $1\frac{33}{64}$ in. deep and $\frac{3}{4}$ in. wide. It is completely interchangeable with and same size as standard "on" and "off" switch. This compact circuit breaker saves space, weight and wiring time; eliminates fuses and provides calibrated protection for each circuit, all within one sealed housing. For "on" and "off", the toggle lever is moved manually as with ordinary switch. If dangerous over-current is present, toggle lever snaps to "off". The 9300 Circuit Breaker is non-trip free, but when manually released, breaker will trip if over-current is still present.—AVIATION, *December, 1941.*

To step up production on small-hole drilling and tapping operations, a new series of two, three and four-spindle drilling machines have been introduced by *Atlas Press Co.*, Kalamazoo, Mich. Drilling heads incorporate well-known ball bearing equipped floating drive featured in all Atlas heavy drill presses. Table weight of the three and four-spindle machine is reported at 575 lb., furnishing a solid support for smooth movement of heavy jigs, fixtures and parts in production quantities. Each drilling head is equipped with own motor mounting and new type of positioning control with crank handle. Table surface (3 and 4-spindle machines) 21x54 in. spindle travel 4 in.—AVIATION, *December, 1941.*

Development of a full automatic barrel cleaning and plating machine for handling small parts in bulk has been announced by *Udylite Corp.*, Detroit, Mich. The machine is being used to zinc and cadmium plate aircraft engine parts continuously. Said to offer radical improvements over existing machinery, it makes possible complete finishing of small parts with minimum of labor expense. It is completely automatic in that the parts are progressively subjected to various cleaning, rinsing, pickling, plating and drying operations without manual handling. The only manual labor required is at either end of machine, eliminating 8 to 10 hand operations. Operators need no rubber gloves, boots or aprons, and do not come in contact with material until after it is discharged clean and dry. Tanks in plating barrels have sufficient anode and solution capacity to maintain correct metal content without addition of metal in salt form.—AVIATION, *December, 1941.*

Any-Angle Tool Vise, designed for grinding chip-breaker grooves into tips of carbide tools and formerly furnished only as a part of the Hammond "4" Chip Breaker grinder, has now been placed on the market as a separate unit by *Hammond Machinery Builders, Inc.*, 1638 Douglas Ave., Kalamazoo, Mich. Complete in itself, the vise is mounted on a lug which is easily fitted to a machine table. New vise is constructed on a double-cradle principle permitting adjustment of grinding angles on three separate planes. Two closely machined steel blocks, rounded on bottom, are cradled into each other at right angles. After adjustment, they are solidly locked together by tightening cam locks operating in machined segments at ends of respective blocks. Absolutely no vibration or deflection is permitted, it is said.—AVIATION, *December, 1941.*

Addition of a new series No. 7 line of Power Squaring Shears built in 4 to 12 foot cutting lengths and capacities from $\frac{1}{4}$ in. to 10 gage is brought out by *Niagara Machine & Tool Works,* Buffalo, N. Y. These shears are of underdrive design with drive including flywheel, gearing, clutch, eccentrics and connections completely enclosed and operating in a bath of oil. Camber or curl of narrow strips is said to be eliminated, and more working strokes per hour are possible by high operating speed of 60 strokes per min.—AVIATION, *December, 1941.*

A special Air-Operated Projection Spot Welder, No. 600-KKD, was placed on the market recently by *Eisler Engineering Co., Inc.*, 740 So. 13th St., Newark, N. J. This machine is arranged with special welding jigs and fixtures for welding fins to steel tubing. No individual jig is needed for loading the work. There are 56 points of heat control, and the transformer secondary, welding dies, and mandrel are water-cooled throughout. The rotating mandrel is operated by air and fully automatically controlled. Pressure for each set of air cylinders can be regulated individually to meet any specific requirement. The machine is so wired that the ejector mechanism cannot operate while the welding dies are in motion, nor will the welding dies operate while the ejector mechanism is in motion. Actual welding time is controlled by automatic timing equipment. Production is about 200 finished pieces per hour.—AVIATION, *December, 1941.*



Searle Amerflex-26 conduit



Elastic Stop Nut Blind Mounting Nuts

A synthetically covered flexible electrical conduit, Amerflex-26, is being produced by *Searle Aero Industries, Inc.*, Hawthorne, Calif. This conduit, it is said, possesses 30 to 40 percent longer life because of greater flexibility, heat resistance, and oil and solvent resistance, and is 47 to 54 percent lighter in weight. It is specifically adapted for use in motor nacelles, behind instrument panels, and inside airplanes where wiring might be exposed to grease oil or dust, although it is available without covering, where such protection is not required. Any length up to 25 ft., with or without standard or special fittings, may be supplied.—AVIATION, *December, 1941.*

To provide vibration-proof fastenings in aircraft construction, *Elastic Stop Nut Corp.*, 2332 Vauxhall Rd., Union, N. J., now offer their anchor type nuts for blind mounting applications. The bolts, which are inserted from the outside, pass first through the removable plate used to cover hand holes, inspection openings, etc., and then through the structure into the stationary nuts. Every nut incorporates basic Elastic Stop self-locking feature, and the nuts are offered in a wide range of sizes, materials and thread systems.—AVIATION, *December, 1941.*

Ace Spot Welders made by *Pier Equipment Mfg. Co.*, Milton & Cross Sts., Benton Harbor, Mich., are now offered with a new type of precision Timer for automatically controlling welding time period. Thus equipped, welding time can be quickly selected, hourly production increased, and uniform welds assured, company claims. Provision has been made for simple easy adjustment, there being three concentric scales on a convenient direct-reading dial. Adjustment range is from 3 to 47 cycles (3/60ths to 47/60ths of a second), calibrated in one cycle steps. Once timing dial is set for a job, depressing of pedal is followed by closing of welder contactor, energizing welding circuit and timing element. At end of selected time period, contactor is automatically tripped and welding circuit opened.—AVIATION, *December, 1941.*

Simplicity and ease of handling are features of the new portable engine assembly stand announced by *Aviation Dept., Whiting Corp.*, Harvey, Ill. Originally designed by Karl O. Larson, chief engineer of Northwest Airlines, it has been service tested and is available for all makes of radial engines.—AVIATION, *December, 1941.*

A complete new line of hydraulic disconnect couplings is announced by Bendix Aviation, Ltd., Union Air Terminal, Burbank, Calif. The Bendix coupling is so designed that, when attached, the area of passage through the valve is everywhere equivalent to the inside diameter of a standard fitting. As soon as the coupling nut is loosened, sleeve valves in the two halves of the coupling close so that no fluid is lost from either side of the line. The coupling nut seals with a very light pressure so that it is never necessary to tighten it with a wrench.—AVIATION, *December, 1941.*

Only 6¼ in. in overall length, and with a speed of 17,000 r.p.m. for wheels up to 2 in., the recently announced Aro Model 22BGS Grinder has been designed by *Aro Equipment Corp.*, Bryan, Ohio, as a pneumatic grinder that is compact and sufficiently light for one-hand operation, yet rugged and powerful. New grinder is said to have undergone extensive tests in actual use in aircraft and other industrial plants throughout the country. It is equipped with large precision type ball bearings, and is available with either lever or button throttle and with spindle extension and collets of various sizes.—AVIATION, *December, 1941.*

Pier precision Timer for Welding

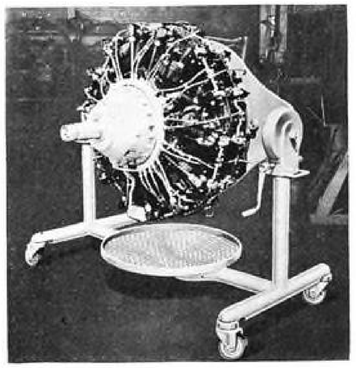

Whiting portable engine stand

Bendix disconnect couplings

Aro Model 22BGS Grinder

HERE'S SOMETHING NEW* IN RIVET SETS

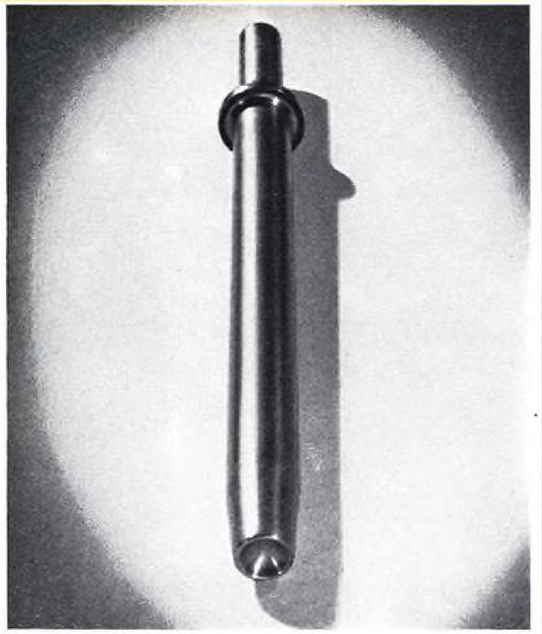

***Cupforged–Comparameter Inspected**

For Longer Wear and Greater Precision

Keep out in front! Make it *better* or don't make it! There's no digression from this policy at Aero Tool. Typical are these years-ahead Flush and Cup Type Rivet Sets.

Aero Tool Rivet Sets are "Cupforged" to last longer and retain their precise shapes—They're Microglass Finished—won't mar the most delicate skin or surface—like every Aero Tool Product, they're Comparameter Inspected for surface finish and dimensional accuracy. Available in all standard sizes and lengths, Brazier or Round Head Types.

Send (on your firm letterhead, please) for this illustrated 36 page catalog of Production and Maintenance Tools including Bucking Bars, Dimpling Tools, Stop Countersinks, Back Spotfacers, Skin Clamps, Drill Adaptors and Drill Bushings all to Aero Tool Standards.

AERO TOOL CO.

CUPFORGED AVIATION TOOLS

AERO TOOL COMPANY, 233 WEST OLIVE AVENUE, BURBANK, CALIF.

★★★ VICTORY ★★★ VICTORY ★★★

PILOTS for DEFENSE

TRAIN in SILVAIRES

The more pilots we train now, the longer we'll keep enemies from our shores. Silvaire-trained pilots are fighting with the R. A. F. and flying with the Air Forces of the United States on active defense duty. The production of superior Silvaire airplanes makes thorough defense flight training available inexpensively to CPTP students, Home Guard members and students of most CAA approved schools. Pilots for defense are training in the ship preferred by experienced instructors —the SILVAIRE.

See and fly the new 8D Silvaire DeLuxe . . . cruising speed 110 m.p.h., range 550 miles . . . starter, muffler, 12-volt lights and battery, etc. . . . available for night and blind flight instruction.

Avoid delay — present prices cannot be guaranteed.

SILVAIRE

A Defense Product of
LUSCOMBE AIRPLANE CORPORATION

LET'S GO! U.S.A. KEEP 'EM FLYING!

WEST TRENTON NEW JERSEY



Knu-Vise #830 Midget Toggle Clamp

G-E Bearing Mandrel Cassette



Mossman #4101 Lever Switch

Ohio Crankshaft TOCCO Jr.

New Midget Toggle Clamp is announced by *Knu-Vise, Inc.*, 16837 Hamilton Ave., Detroit, Mich. Furnished complete with spindle and rubber cap, measuring but 4 in. x 1½, a pressure in excess of 500 lb. is said to be obtained with this model #830 clamp. Because of its small size and great holding strength the new Toggle Clamp should be ideally adapted to aircraft work.—AVIATION, *December, 1941.*

A fast accurate method for radiographically inspecting cylindrical aircraft engine bearings is provided by the new G-E Bearing Mandrel Cassette made by *General Electric X-Ray Corp.*, 2012 Jackson Blvd., Chicago, Ill. Total inspection time required to x-ray 20 bearings is reduced to about 10 minutes. Unit has four 19-in. mandrels, each having capacity of four or more bearings depending on length of bearing examined. A full length film is wrapped around mandrel and is then covered with black celluloid for protection. When placed in machine, the loaded mandrels are rotated 360 deg. by electric motor drive unit so that entire surface of bearing is exposed to x-radiation. Film thus gives operator full view of uniformity of internal metal content of bearing. Mandrel travel can also be arranged to be controlled automatically so full surface of bearing is x-rayed in 60 deg. sections.—AVIATION, *December, 1941.*

A lever switch constructed to meet the need for a heavy duty, multiple contact, positive action type is offered by *Donald P. Mossman, Inc.*, 6021 N. Northwest Highway, Chicago, Ill. Designated No. 4101 Lever Switch, design affords great flexibility of contact arrangements with either locking or non-locking action. It is therefore available in an almost unlimited series of combinations of contact assemblies, which may built up to suit your specific requirements. Contact ratings for standard heavy duty contacts, $\frac{3}{16}$ in. dia. fine silver, 10 amps.—110 v., a.c. (non-inductive); extra heavy duty contacts, $\frac{3}{8}$ in. dia. Gibsiloy, 20 amps.—110 v., a.c. (non-inductive). Breakdown rating of springs to ground—2000 v., a.c. Positive action is said to be reliable and independent of the pressure of contact springs. Corrosive resistant materials or heavy plating is used throughout.—AVIATION, *December, 1941.*

The new two-station electrical induction surface hardening and heating unit which has been introduced by *Ohio Crankshaft, Inc.*, 4000 Harvard Ave., Cleveland, Ohio, is adapted to brazing, heating for forging, stress relieving and soldering as well as surface hardening. Called the Tocco Junior, it has a 20 kw. output and is able to treat small and medium size parts of an unlimited variety. The new unit is said to provide double the production capacity, with no appreciable increase in power consumption of the original one-station 20 kw. Junior, and can operate at full power capacity nearly 100 percent of the time. One operator handles both stations, preparing one fixture as other is hardening. Typical aircraft uses, among others, to which the machines have been put are brazing tubes, engine accessories and fuselage parts.—AVIATION, *December, 1941.*

Complete line of standard "stock" carbide tipped cutting tools, comprising six styles and 46 stocked sizes, are being made on a mass production basis by the *Tungsten Carbide Tool Co.*, subsidiary of Michigan Tool Co., Detroit, Mich. All tools have diamond ground edges and are ready for immediate use. Types for cast iron, steel and non-ferrous metals are included, and the tools are designed to cover the large majority of all turning, boring and facing requirements. They may be easily converted into special shapes by simple grinding operations. Styles and sizes suitable for cast iron and non-ferrous metals are furnished with grey shanks, those for steel with black.—AVIATION, *December, 1941.*

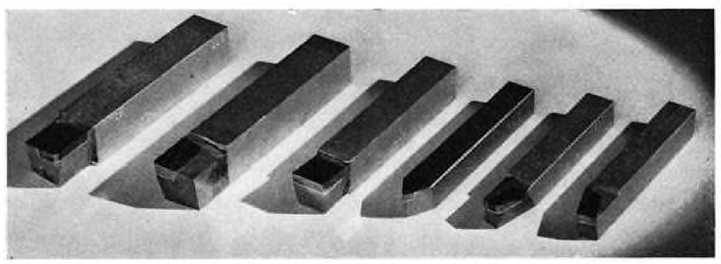

Tungsten standard cutting tools

America . . .
BIRTHPLACE of ORIGINAL DESIGN

The creative genius of the aircraft industry is strikingly revealed in production activities at Vought-Sikorsky. Four distinct types of aircraft are now being built:

★ The Navy's standard observation scout
★ The first successful American helicopter
★ A Navy fighter hailed as America's fastest
★ The first non-stop trans-Atlantic transport

And on the drafting boards even more revolutionary types are being created.

VOUGHT • SIKORSKY
AIRCRAFT
STRATFORD • CONNECTICUT
ONE OF THE THREE DIVISIONS
OF UNITED AIRCRAFT CORPORATION

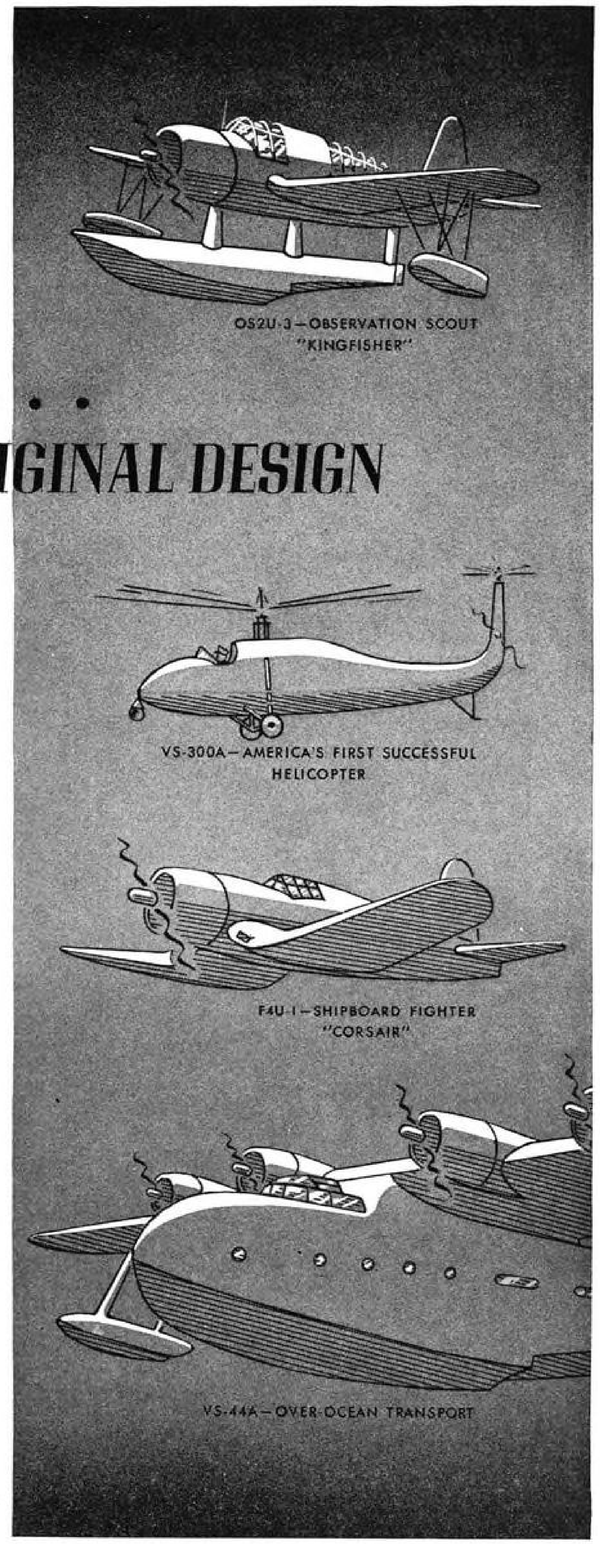

THE AVIATION NEWS

BLAINE STUBBLEFIELD, Washington | C. F. McREYNOLDS, Pacific Coast | Randolph Hawthorne, New York | E. R. Lockin, New York | DECEMBER 1941

CAA May Expand Port Plan to $200,000,000

Plans to expand the Civil-Airport two-year program to a total of $200,000,000 have been unofficially confirmed by officials of CAA. The Authority has a request before the Budget Bureau for $67,000,000, which would be in addition to $94,978,000 existing CAA appropriations plus $40,000,000 WPA money. These latter two are intended to complete the original 250-port program started last year, and to improve 149 other fields. The $67,000,000 would provide for a program as yet not outlined.

Specifically, it is expected that any extension of the program will be held to fields approved as necessary to defense, as indicated by an interdepartmental board, representing the War, Navy, and Commerce Departments. Selection of sites, proximity to strategic defensive areas, military training bases, and strategic air routes, are obvious dominant factors in such considerations.

The board is understood to have agreed upon tentative rules which would ban construction of new airports within 6 miles of the let-down legs of a radio range or instrument landing beam, if within ten miles of a radio range station.

It is further expected that civil airports taken over for Army or Navy training activities will no longer be available for civil aviation, although fields

(Turn to page 141)

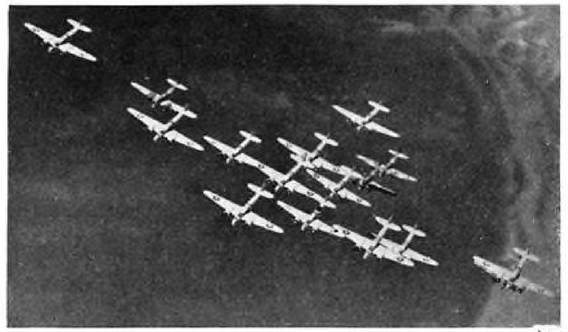

Acme

IN TIGHT FORMATION a squadron of Glenn Martin "Maryland" bombers flown by the South African Air Force speeds on its mission to raid enemy harbors in North Africa.

PART of the largest mass flight delivery of airplanes on record. On October 18, 123 Vultee Valiant basic trainers took off at 11-second intervals from Vultee Field, Calif., with Army and Navy pilots aboard. They are equipped with Pratt & Whitney engines and Hamilton Standard propellers.

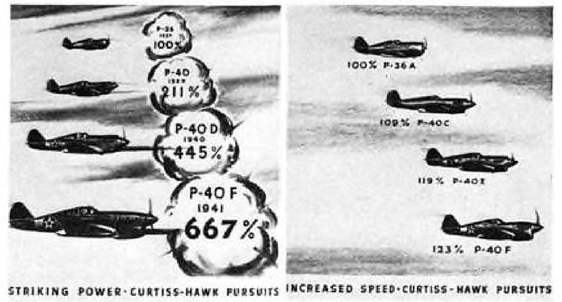

STRIKING POWER-CURTISS-HAWK PURSUITS | INCREASED SPEED-CURTISS-HAWK PURSUITS

CURTISS-WRIGHT has been stepping up performance of its P-40 series. Drawing above at left shows fire-power of the P-40 F which has a 1150 hp. Rolls-Royce engine built by Packard. It is estimated that this late model has either five or six .50 caliber machine guns in each wing. Speed of Curtiss pursuits has been increasing steadily. The P-36 had a top speed of about 325 m.p.h. Chart at right, approved by Air Corps, gives F series a speed close to 400 m.p.h.

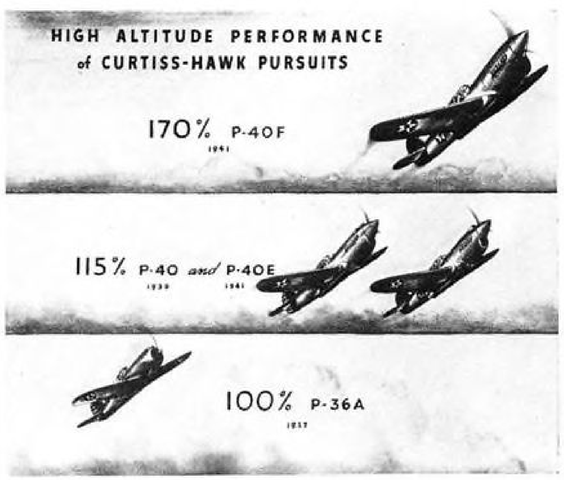

THE CEILING of the E series was 17,000 ft. On this basis the latest model has a ceiling of 25,000 ft., which is a very real improvement in performance.

Aircraft Standards Group Holds Annual Meeting

A far greater degree of standardization between the principal aircraft manufacturers of the United States will result from the annual national meeting of standards engineers and government representatives held at the Lexington Hotel in New York, November 10-13.

The four-day meeting follows a year of group conferences held in many cities on a large number of problems, in collaboration with the standards and technical bodies of the Army, Navy and Civil Aeronautical Boards, the Office of Production Management and other authoritative groups.

The much accelerated program of aircraft construction has multiplied standards problems along with others, but the present emergency has brought a saner handling of small parts design with respect to interchangeability. Before the present war, the degree of standardization was low, and the methods were awkward and slow; but the aircraft manufacturers today are sharing standard methods and parts designs, working more directly with advancing experience. Stock sizes of raw materials are reduced in number, individual parts and sub-assemblies are made interchangeable, test data are exchanged; other companies are called into group conferences before the design is determined. The National Aircraft Standards Committee is ready on short notice to give the Government services an industry-wide survey of a problem, which was not possible before the present emergency.

International News Photo

THIS UNUSUAL PHOTOGRAPH shows clearly details of the hoisting mechanism and guns of the forward turrets aboard the U.S.S. Lexington, 14-year-old aircraft carrier which turned in a good 32 knots during recent speed trials in the Pacific.

OFFICERS AND MEMBERS of the National Aircraft Standards Committee at their annual meeting held at the Lexington Hotel in New York, November 10-13. Seated, l. to r., are newly elected national leaders: Western Chairman Carl Torresen (North American Aviation); National Chairman John Cramer (Boeing); Eastern Chairman Jack Thompson (Glenn L. Martin); and Jack Gray, National Secretary (Aeronautical Chamber of Commerce). Two additional members of the Executive Board, Comdr. R. D. McCart (Brewster) and Newton Houston (North American) got away before the photographer arrived.

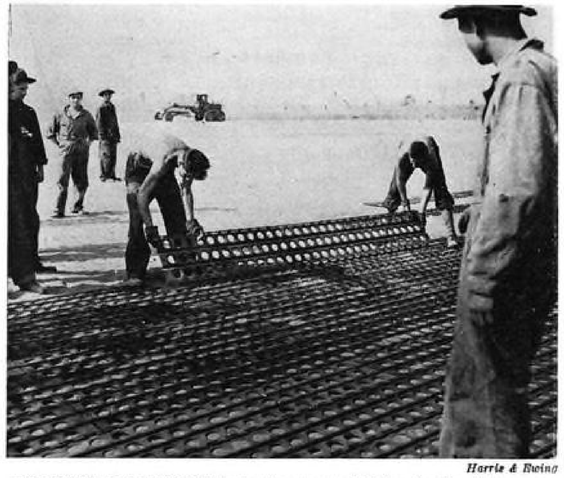

Harris & Ewing

PORTABLE AIRPORTS are the newest thing in the Army engineers' bag of mechanized warfare tricks. Each strip locks into the other to form a metal mat runway 3,000 ft. long by 150 ft. wide. Holes in strips allow grass to grow through and camouflage it.

The meeting was begun with an executive group session to revise the operations directive. The first full meeting of all representatives convened to elect new national leaders as follows:

National chairman John Cramer (Boeing), Eastern Chairman Jack Thompson (Glenn L. Martin), Western Chairman Carl Torresen (North American Aviation), Comdr. R. D. McCart (Brewster), Newton Houston (North American), and Jack Gray, National Secretary (Aeronautical Chamber of Commerce). These are the Executive Board of the Committee.

The other members are: J. J. Clark (Boeing, Wichita), William Smith (Bell), George Evans (Brewster), Gordon Waite (Consolidated), Eric Dudley (Curtiss, Buffalo), M. A. Rhoads (Curtiss, St. Louis), Henry Gunning (Douglas, Santa Monica), Frank Salisburg (Douglas, El Segundo), Robert Neill (Fleetwings), W. D. Craig, Jr. (Grumman), Dave Mendenhall (Harlow), W. H. Colcord (Kellett), Glen Aron (Northrop), Louis Cummaro (Lockheed), Joe Perina, (Republic), A. M. Stutz (Stinson), J. B. Misner (Hughes), Jack Cox (Vega), C. E. Wingate (Vought-Sikorsky), Charles Sardou, Jr. (Vultee), Tom Hearne (Ryan).

Also in attendance were Carl Stryker of the OPM, Lieut. Col. D. G. Lingle, Army Air Corps, Capt. H. M. Cronk, Army Air Corps, Lieut Gerder, Navy.

Speaking on special subjects were Lieut. Col. D. G. Lingle, Cyril Ainsworth, Secretary of the American Standards Association, Carl Stryker and John Sanborn of the Manufacturers' Aircraft Association.

Air Support Command

Maj. Gen. Herbert A. Dargue, commanding the First Air Force, announces establishment of the First Air Support Command to support the Army's ground units.

It will be one of five ASCs which will operate with the First, Second, Third, and Fourth Field Armies, and with the Armored Force.

Col. William E. Kepner is in command of the new First Support Command, which has its headquarters at Mitchell Field, N. Y.

The air support command combines lighter and heavier-than-air, light bombers, dive bombers, photo planes, gliders, and transports for 'chute troops —all the aviation elements a ground force needs to achieve local air superiority.

To the First has been assigned, initially, three observation groups, a bombardment group, three tow target detachments, a balloon squadron, and a signal company, all based in the East—New England to the Carolinas.

Airport Protection

Municipal employes throughout the country will be trained by the Cooper Union in airport protection, including the study of explosive bombs and their effect on hangars, runways and airline service, at the request of Mayor LaGuardia, director of Civilian Defense.

Paul H. Robbins, civil engineering instructor at Cooper Union will direct a series of two-week training courses in New York during December and January for representatives of cities all over the country. These will be schooled as instructors for their own communities.

Two-Control Licensing

Proposed regulations for the licensing of pilots to fly light planes operating on the two-control principle have been circulated to the industry by the CAB for comment.

It is proposed that the spin test be eliminated so that special private licenses limited to this type of aircraft can be issued, since these planes are rated as characteristically incapable of spinning, thereby making it possible for a pilot to be certificated after 5 hours of dual and 25 of solo instead of the required 8 hours dual and 30 solo for regular private licenses.

With such a license, a pilot could take his spin test later and receive a regular private pilot's certificate. Thus far, the only two planes so produced are the Ercoupe and the Skyfarer.

CAA Airport Plan

(Continued from page 139)

occupied by Air Corps tactical units may be used jointly for scheduled commercial traffic, but not for unscheduled flights by planes lacking 2-way radio.

As viewed in some quarters, this prospect leaves many areas that probably will not benefit from the proposed CAA program, and in consequence, a continuing need for construction of fields suitable for private planes and emergency landing by other aircraft.

SPOT CHECKING

Washington to Alaska direct service will be established if application of Northwest Airlines for two routes: Washington-Chicago and Minneapolis-Fairbanks is granted. Route would cut 700 miles off trip from East via Seattle on Pan American. Maybe Administration wants it, for defense reasons; if so, question of equipment would be hurdled.

Culver Aircraft Corporation has passed to control of Walter H. Beech and Charles G. Yankee. Beech organized Travelaire and is now president of Beech Aircraft. Yankee is vice president of Beech.

Glenn Martin Company launched the 80-ton XPB2M1 down a way, like a ship, with speeches and band music. Chief Engineer W. K. Ebel said motors had been run, wings flexed. Tests will show ship's "finesse and habits." He said more of the type would be built for Navy.

Credit for 30 hours CPT flying time is now given by the Army, as it has been by Navy since last winter.

Flight strips, to supplement existing airports, will be built with $10,000,000 included in a highway authorization bill on its way to the President as this was written. Work will begin when appropriation is made.

Capetown Clipper, newest of the Boeing 314s, with all the design improvements made on the others; 5400 gallons gas capacity; 2000 pounds more than original pay load; four 1650 h.p. Wright Cyclones totaling 6600 h.p.—took off on a survey of the three-continent Miami-Nata-Leopoldville African line. She carried crew of 14 and PAA and CAA officials. Total course mileage: 9253.

Aeronautical shipments to Britain from January to August totalled $330,000,000, or an average of $40,000,000 a month. A little over $6,000,000 of this was under Lend-Lease, while the rest was applied against the roughly $2,000,000,000 in orders placed by the British prior to Lease-Lend.

North American is now employing more than 14,500 men at Inglewood—9200 on the first shift, 5,200 on the second, and some 130 on the third. At Dallas, more than 5,300—about 3,500 on first shift, about 1,800 on the second, and about 35 on the third.

THE WASHINGTON WINDSOCK

By BLAINE STUBBLEFIELD

Second Hand Parts

The story goes that since war started, the Turks, who have German-made planes, have not been able to get parts. So the British shoot down Germans over England and send the parts to the Turks. This makes a nifty bit of reading, and it indicates that the British do not expect the Turks to line up with the Nazis.

If the day ever comes when the British and the Russians appear to be beaten, and the United States must decide whether to shut off the flow of airplanes and munitions to them, so as to arm ourselves for battle, it will be one of the most momentous decisions in history. Although some Army officers are griping, now, about the number of planes going to Russia, the betting is better than even that the day of decision will not come.

Twenty minutes delay in delivery of baggage to incoming passengers at Washington National Airport was the complaint of some callers at our office the other day. "They routed the bags all over in trucks and elevators and red-tape," said the travelers. "Why don't they just give us our bags?" Well, why don't they? Architectural Forum (magazine) reviewing the National Airport, says it is too much architecture and not enough simple function—makes that complaint against air terminal design in general. The Forum's idea of car-to-plane stations along loading line, omitting "grand central" business, would be practical.

Army seems determined to keep women out of any combat and clear beyond the smell of burning powder. Maj. Gen. H. H. Arnold, Deputy Chief of Staff for Air, says Army has decided not to let women ferry bombers from factory to flying field. He said he didn't want to "complicate matters." One real reason is that when so few men are physically constituted to fly hot war planes, it follows that a negligible number of women are so constituted.

A man is touring the Far East and the Mediterranean for Army Air Forces, and he will make a report before long, which you will not read till some Generals publish their memoirs, maybe ten years from now.

The French liner Normandie, now interned in New York, probably will be stripped of stacks and topside and turned into an air-craft carrier. It will be nearly three times as big as any carrier in the world. 83,000 tons, against 33,000 for the Lexington and Saratoga, and it will be the fastest. The Normandie was built with just that in mind; its stacks come up the side and over to the center, and the elevators are grouped for conversion into an aircraft lift.

Colored sparks will fly in Congress if any of the dozen or so bills proposing a separate air force, or a unified aviation system, ever get to the point of hearings. There will be rivers of conversation by people who don't know what they are talking about, and a small stream by people who do. There will be name-calling and double talk, and a thick, expensive transcript of it all, and, in the opinion of most on-lookers, nothing else will happen.

The Stubblefield award goes to the Army for taking the airport directory out of circulation. Army pilots and several thousand government officials can have it, but air mail pilots and the rest of us can't. It's a secret. The idea is to keep the Nazis from getting the directory—in less than two hours.

Army Air Forces Are Expanded to 84 Groups 400,000 Personnel, Probably 50,000 Planes

Washington (AVIATION Bureau)—Regardless of the war's outcome overseas, the United States Army will take on any and all comers to this hemisphere. To that end, the "54-Group Program" of the Army Air Forces is being expanded to 84 Combat groups.

This involves an increase in non-commissioned strength to 400,000 cadets and enlisted men by June 30 next summer, with subsequent expansion to 500,000. As late as June 1940, Air Corps personnel totaled only 3322 officers, 1894 cadets, and 45,914 enlisted men. On June 30, 1941, those figures respectively were 10,697, 8707, and 126,666. Growth of this country's air power will be a phenomenon in military history.

Of course the 84-Combat Group cannot have its quota of airplanes as long as Britain, Russia, China, Dutch East Indies, need our production more than we do. But, should those powers fail to stop the Axis, and if Axis powers tried to poach on this side of the world, our aircraft plants could pour equipment into the Army at a rate no other power could match.

But delayed equipment does not mean that the 84-Group Program is just a paper project. The Air Forces have on hand, and will meantime acquire, enough training equipment of all kinds—primary, advance, and tactical, to make the fully-manned air arm ready to take off for a fight upon delivery of its quota of airplanes.

It is not announced how many airplanes the expanded air arm will use. The 54-Group program called for about 12,500 with as many reserves, or a total of 25,000. Congress has made appropriations for about 46,000 planes for the Army. You can guess, on the basis of that and the President's original plan, that the Air Forces are aiming at about 50,000. That would be far and away the biggest aviation power in the world.

This forehanded planning and leadership, generally regarded as worthy of the confidence and tax money of the people, is guided by Major General Henry H. Arnold, Chief of the Army Air Forces and Deputy Chief of Staff for Air; Major General George H. Brett, Chief of the Air Corps; and Lieut. General Delos Emmons, Commanding General, Combat Command.

The new tactical Groups will be assigned to the Combat Command for operational training, while the Air Corps will continue in charge of the individual training of pilots and technicians. The Air Corps will continue its duties in training, ferrying, personnel, intelligence, materiél buildings and grounds.

The old 54-Group program which called for expansion to 16,800 officers, 187,000 enlisted men, and 15,000 cadets, will be gradually merged with the new 84-Group plan, calling for 400,000 to 500,000 cadets and enlisted men. The new flight personnel quota is not mentioned, for military reasons. It will be recalled that the objective of 12,000 pilots (and 48,000 technicians) was increased to 30,000 pilots and 100,000 technicians prior to promulgation of the new 84-group program.

Under the 30,000 pilots per year schedule three Air Corps Training Centers (Southeast, Gulf, and West Coast) supervise the activities of 41 civilian schools giving 10 weeks of elementary training; 15 military basic flying schools and 3 civilian schools giving basic training; and 21 advanced military flight training schools, 7 of which are single-engine flying schools and 14 two-engine flying schools. There are 3 flexible gunnery military schools, 1 civil navigation school, and 3 replacement training centers (pilot, bombardier, and navigator). There are 3 navigator schools and 6 bombardier schools. Technical training of enlisted specialists is conducted in 19 other schools and 3 replacement training centers.

On December 18, 1940, four Air District Headquarters were formed, together with 14 additional Wing Headquarters, to provide the overhead to care for the assignment of all personnel and planes in the 54-Group Program. The Air Districts, which were a geographical setup, have been redesignated as the First, Second, Third, and Fourth Air Forces.

This was followed on June 22, 1941, by unification of air activities under the present "autonomous" organization, the Army Air Forces. A number of the 84 Combat Groups to be created as the goal of the new program will be assigned to overseas departments.

The greater number, however, will be assigned to the Air Force Combat Command, which is the fighting force of the Army Air Forces and is composed of Bombardment Aviation (Heavy, Medium and Light), Pursuit Aviation (Interceptor and Fighter), and Reconnaisance Aviation (Medium and Long Range), operating either alone or in support of the ground and naval forces. Certain other aviation, such as Observation and Liaison, also a part of the A.F.C.C., is usually assigned for use by the ground forces.

Aviation components of the Hawaiian and Panama Canal Departments will be organized into Department Air Forces under their respective Department Commanders, to attain the unity of command so essential for successful operations.

Wide World

ARMY AIR CORPS' NEWEST and largest air mechanics training school, Sheppard Field, Wichita Falls, Texas, where 26,000 men will be in service.

AAF Accidents Increase in Early Combat Stage But Decrease in Primary, Basic and Advance

Washington (AVIATION Bureau)—Multiple accidents in the Army Air Force recently have caused intensified public concern and have brought insistent requests from the press for statistics on training hours and rate of accidents to pilot hours in all training categories.

As this was written, AAF officials were considering whether the release of such information would be in the public interest.

The War Department did, however, issue a statement explaining that, "Despite the greatly increased amount of training and tactical flying now being done . . . and the use of new airplanes of much higher speeds and performance, the accident rate in military flying during the past fiscal year has remained substantially unchanged."

Whether or not this statement would hold entirely true under the increased number of accidents this autumn, was not revealed.

The Air Force some time ago

(*Turn to page* 145)

BEECH AT-11, twin engine advanced trainer delivered to the Air Corps for specialized training of bombardiers and gunners. Equipped with flexible guns and bomb racks for instruction of crews, it is powered by Pratt & Whitney 450 hp. engines.

NO. 9

ALUMINUM, DEFENSE, AND YOU

ALCOA

SIX MORE PLANTS
IN FIVE STATES
ON THE WAY

DEFENSE PLANT CORPORATION OWNS THEM. We've been designated to build them . . . fast.

ARK.

Actually, when the names went on the dotted lines of the contract on August 19, we had already placed more than $16,000,000 worth of orders for some of the equipment and materials it takes longest to make and get.

FIVE OF THESE PLANTS will smelt aluminum. Their combined capacity is planned for more than 500,000,000 pounds a year, which is greater than the nation's entire production of aluminum in 1940. Locations: Massena, N. Y., Spokane, Wash., Troutdale, Ore., Los Angeles, and in the State of Arkansas.

N. Y.

The sixth plant will refine alumina from bauxite. Its billion-pounds-a-year capacity adds 58% to the nation's alumina capacity. It will be located at Bauxite, Arkansas.

HOW GOES CONSTRUCTION? At this writing, as fast as title is secured to the sites, contracts are being let for grading and foundations so as to be ready for the structural steel, which is coming as rapidly as it can be gotten.

What is more important, the aluminum plants are scheduled to deliver ingot by the summer of 1942; the refining plant to deliver alumina in early summer, 1942.

WASH.

WE'VE ASSIGNED a large staff of men full time to headquarters engineering, purchasing, and accounting on this government building job.

We're sending competent and experienced management men out on these jobs as superintendents and other staff executives on construction, and for subsequent operation of such of these plants as we are designated to operate.

ORE.

EVERY KNOWN IMPROVEMENT in design and construction and equipment is being incorporated in these plants. We intend that every dollar that will be spent shall be the best dollar's worth that experience can build. We do not make one cent of profit from this assigned job of construction.

We think we know how to get the government value-received for its money, because we are completing the expenditure of more than $200,000,000 of our own money in an expansion program which started after the beginning of the present war. Some of this expenditure is in new alumina and aluminum plants which will bring our own Alcoa capacity up to more than 700,000,000 pounds a year. The remainder is in tremendous expansion of facilities for fabricating every form of aluminum.

CAL.

DEFENSE, GENTLEMEN, is getting its aluminum.

ALUMINUM COMPANY OF AMERICA

CADET OPERATORS—*Keep 'em Flying!*

Cadets Log More Hours at Less Cost for Greater Profit

Engineered from the Mechanic's point-of-view, the Interstate Cadet cuts maintenance time in half. Built to take rough, student handling, the Cadet gives CPT Operators hundreds of extra in-the-air hours. No matter how you look at it, the Cadet is the operator's answer to greater profits.

Furthermore—it's the Pilot's preference from Coast-to-Coast and that calls for positive control, stability, maneuverability, comfort, vision, easy ground handling, quicker take-off and slower landing— and means superior performance.

Add up the three big important requisites in a trainer for profitable CPTP Operation—Ease of Maintenance—Sturdy Construction—Superior Performance —and you have the blue and yellow Interstate Cadet.

For proof—Ask CPT Operators, the men who know trainers best, and they will tell you "*It's the outstanding trainer for 1942*"

It's what you get for what you pay

INTERSTATE Cadet

INTERSTATE AIRCRAFT & ENGINEERING CORP.
★ EL SEGUNDO ★ CALIFORNIA ★

PERFORMANCE FEATURES

Dual Controlled Hydraulic Brakes • 180° Steerable Tail Wheel • Parking Brakes • Military Type Toe Brakes • Tandem Seating—Fly Solo from Either Seat • Added Rear Visibility • Full View Instrument Panel • 50-lb. Increased Load Capacity.

MAINTENANCE FEATURES

Replaceable Ball and Bronze Bearings • High Pressure Lubrication Fittings • Quick Detachable Engine Cowling • Self Aligning Ball Bearing Aileron Controls • Extra Large Inspection Plates.

CONSTRUCTION FEATURES

Balanced Rudder • New Interior Cooling • Patented Time Saving Fabriclips • Interchangeable Airframe Parts • Single Unit Hydraulic Shock Absorbers • Airliner Type Trim Tab.

AAF Accidents

(Continued from page 142)

cut the requirement of 2000 hours and ten years of experience for principal pilot on four-engined equipment, to 750 hours and two years of experience. It is assumed that comparable cuts must have been made in other categories of training and technical work. Students are going out of advance training into combat squadrons with 200 hours in some cases, and with an average of 210 hours.

In its formal statement, the War Department said that although the number of miles flown by Army pilots and students has increased and is still increasing in almost "astronomical" proportions, the number of fatal accidents per mile flown continue practically unchanged in virtually every phase of military aviation.

The accident rate in primary training during the past fiscal year was slightly below the average rate for the three-year pre-emergency period. In basic training, the accident rate was below the three-year mean and also below the 1940 rate. The same was true of advanced training.

The slight increase in combat squadron accidents was expected, the statement says, what with 200-hour students coming in, into combat, and using high-performance equipment. But this rate will go down as they gain experience.

Despite influx of new and faster airplanes, the accident rate among the older pilots has gone down below the three-year level.

Considering that the Air Force is now on a semi-wartime basis, carrying out missions essential to realistic combat training, the Army feels that it is doing pretty well. Safety is given every possible consideration in the circumstances.

Unofficial comment on the recent series of accidents is that men of relatively small experience—mere tyros compared with the titans of the airmail—are running into winter weather and other conditions they are not able to cope with.

European Front Reports

RAF squadrons are calling the Bell Airacobra "The best pursuit plane in the air . . . Better than anything we or the Germans have in operation," according to United Press dispatch. Some pilots told UP that RAF had removed the 37 mm. cannon from the Airacobra and replaced it with 20 mm. gun because they wanted faster shooting and more rounds of ammunition. Whether this change has been general is not told.

Wide World

"VEST POCKET" RATIONS for paratroops. This one-day supply of concentrated food weighs but 32.8 oz., contains 3,726 calories.

Shell guns on airplanes are proving extremely destructive, to enemy planes and to ground objectives. They penetrate the boilers of railroad locomotives and ships, putting them out of business. They've been knocking out "invasion" barges, too.

Two thirds of the American Eagle Squadron in England learned to fly in the CPTP, according to a report from Harold Strickland, a Chicagoan now with AES in London, to the Civil Aeronautics Authority. Boys who first hopped in a Cub 12 months ago are now hitting the Jerries.

A Martin B-10 bomber of the Netherlands Army was forced down in the Java Sea, floated for an unstated time until rescue planes arrived. Martin officials long have claimed that this airplane would float at least 48 hours.

Early in November, the Russians transported "several divisions" of ski troops from the Ural Mountains up to the Moscow front. A division might be 10,000 to 25,000 men. Thus the Russians may have air-borne what amounts to an army. Armies may some day move in the air, as the Marines now move on water, and strategists everywhere are thinking about the possibility.

A Bristol Blenheim, making a low-level attack on a Nazi convoy off Holland, was hit in the starboard engine by a shell. The plane hit the water, dipped its propellers, but, almost incredibly, stayed in the air and, after smacking the water once more, got home, "making some remarkable noises."

The "Hurricane II" is armed with 12 machine guns or four 20 mm. cannon, the most heavily gunned fighter in service. It has a two-speed supercharger which is said to give it a higher ceiling than the eight-gun Hurricane I, a better rate of climb at high levels, and better top speed. The Messerschmitt 109F, newest version, has one 15 mm. cannon and two machine guns. The cannon, however, fires at rate of 900 rounds per minute.

The British "Beaufighter," a twin-engined fighting ship, has four cannon, presumably 20 mm. size, and six machine guns, probably including some 50 caliber.

Society of British Aircraft Constructors says that German airplane manufacture is now extended to its limit, but they admit they do not know what reserves the Germans have on hand. SBAC says its own construction program will soon turn the Battle of Britain into the Battle of Germany. A recent census shows that about 30 percent of all the British aircraft workers are women.

The Russians are showing up with hundreds of a new bomber of the YAK-4 type, said by the British to be extremely fast and devastating. Persons who watch reports on Nazi-Russ air action observe that claims of planes destroyed on both sides are now sometimes only 10 or 15 a day, as against previous bags of over a hundred a day. They wonder whether both sides' air forces are so badly depleted that few planes are engaged. This seems improbable.

Conflicting with reports of more and more speed in fighting planes on the front, are other reports of a tendency to sacrifice speed for other advantages. Certain it is that human endurance of blackout and pressure on internal organs due to turns and pull-outs has about reached its limit, unless the flight medicos find some remedy.

Round World Record & Longest Overwater Hop

A new round-the-world flight time record was set, and the longest over-water hop was made, by Maj. Alva L. Harvey, commanding a four-motored Consolidated B-24 bomber leaving Washington, D. C., at 7:30 a.m. Sept. 13 and flying East to Washington again.

The trip took members of the Harriman mission to Moscow for a war council. The 18-ton ship made the 24,700-mile run in less time than any other airplane has made it. The itinerary was Gander Lake, Newfoundland; Archangel, Russia; Moscow; Singapore; Darwin, Australia; Wake Island; Honolulu; Los Angeles; Washington. The longest water jump, by a land plane was Singapore to Los Angeles.

Contrary to reports, the Air Force tells this writer that the Harvey trip was not attacked at any point.

This trip should not be confused with the 26,000-mile flight in a B-24 to the Near East and Egypt, by Lt. Col. Caleb V. Haynes, carrying Maj. George H. Brett, Chief of the Air Corps, and his party. His speed averaged 237 m.p.h.

Four BBB's Organized

Four additional Coast Artillery Barrage Balloon Battalions are organized at Camp Davis, North Carolina. Each new battalion has an authorized strength of 1,257 soldiers and is assigned to the Barrage Balloon Training center at Camp Davis.

Initial strength of the 302d, 303d, and 304th Coast Artillery Barrage Balloon Battalions will be 200 enlisted men. The 305th Battalion will be formed without Battery C and will have an initial strength of 150 enlisted men.

Officers for the new battalions will be supplied by the War Department from the group now on duty at the Barrage Balloon Training Center.

Radio Procurement

A Signal Corps Procurement District at Wright Field, Dayton, is established to speed up production and delivery of aircraft radio equipment, the War Department announces.

At last . . .

the one complete, practical manual of modern methods to help you excel in

AIRPLANE MECHANICAL WORK

NO matter whether you are preparing for a job on aircraft factory production line or in airport service shop—or already have it—you'll welcome this new book with its thorough groundwork in airplane mechanical work, its many instructions, methods, and fine illustrations on airplane construction, maintenance, and repair jobs.

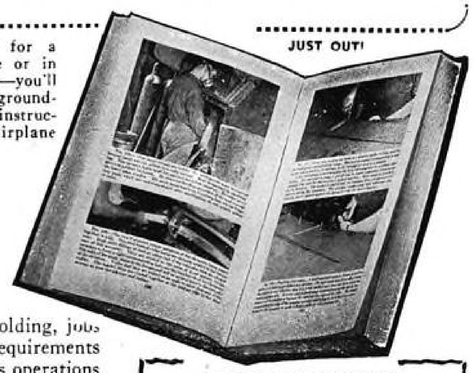

JUST OUT!

HERE IS A VALUABLE TOOL
for the aviation mechanic who wants to move ahead in this rapidly expanding industry. It gives simply and concisely the facts on construction and maintenance of modern planes of every type, large and small, civil and military—to put you in line for better paid, more interesting work.

HOW AIRPLANES ARE MANUFACTURED
HOW TO SERVICE AND REPAIR THEM

told in this thorough manual to help you get and keep an aviation mechanic's job

THIS is a complete, practical manual for those aiming for, or holding, jobs in airplane factories or as airplane mechanics. It covers the requirements of the mechanic's work, the procedures, and all the details of various operations in clear, simple text and many illustrations. It makes plain the fundamentals of airplane structure, flight, and operation; describes every operation in manufacturing light and heavy airplanes; and gives instructions for doing all the inspection, servicing, and repair jobs of airplane maintenance.

THE AVIATION MECHANIC

By CARL NORCROSS

Asst. Editor, *Aviation;* Member Aeronautic Educational Commission, N. Y. City Board of Education

and JAMES D. QUINN, Jr.

Lieut. (j.g.), U. S. Naval Reserve; Mgr. Approved Repair Station 267; Certificated Aircraft Ground Instructor; Certified Aircraft and Aircraft Engine Mechanic

Just out! 563 pages, 537 illustrations, $3.50

Many topics such as these to help you
MASTER AVIATION MECHANICAL WORK

- nomenclature
- what keeps a plane up?
- stresses
- truss type, monocoque and semimonocoque fuselages
- wing spars and ribs
- properties of metals used
- forms in which metals are supplied to an aircraft factory
- heat treating
- welding
- plating, cleaning, and painting metals
- riveting
- fabric finishing
- making spars
- cutting sheet metal
- assembling wing panels
- covering wings
- making the fuselage
- how to make inspections
- how to make an engine warming-up test
- how to make repairs
- construction of engines, lubrication and cooling systems, starters, propellers, etc.
- engine troubles, adjustments
- how to overhaul an engine
- airline maintenance methods

THIS book covers everything the mechanic needs to know—requirements of the work, kinds of jobs there are, all about the plane itself, procedures of manufacturing, servicing, and repairing it, and the actual methods of every operation, from riveting parts to assembling planes, from patching a wing to inspecting a stratoliner.

COMPLETELY COVERS FACTORY AND AIRPORT JOBS
PROFUSELY ILLUSTRATED

After introductory data on the airplane and how it flies, the book takes up construction of planes and plane maintenance, giving an unusually complete treatment of materials and methods, and describing every step in building a light, all-metal plane. With carefully selected and numerous photos it shows how modern planes are built in large factories. The book treats everything in a way that will be helpful to the learner or the man who is new to the work. The typical routines at private, commercial and military airfields are outlined as well as specific jobs of servicing, inspecting, overhauling, and repairing airplanes. The book tells how to do the basic jobs of riveting, welding, sewing, cleaning, doping, etc., and also shows where they are used in the aircraft production line and at the airport.

SHOWS YOU WHY AS WELL AS HOW

Especially helpful is the material briefly and plainly explaining the fundamentals that underlie effective mechanical work. With this you are able to handle jobs more efficiently and advance your ability more quickly, because you understand fully the operational effect you are aiming for, the reasons for any mechanical work on airplanes.

SUITABLE FOR PILOTS

The book contains more than sufficient data for student pilots who are taking the aircraft operations ground school course in the Civilian Pilot Training Program. The aerodynamics and engine-servicing sections meet the qualification requirements for both private and commercial pilot's certificates of competency.

SEND NO MONEY
10 DAYS' FREE EXAMINATION
Mail this coupon today

Other recent books

THE AIRPLANE AND ITS ENGINE by Chatfield, Taylor and Ober. A clear discussion of fundamentals, construction, and capabilities of the airplane and its engine. 4th ed., 414 pgs. 304 illus. $3.00.

WEATHER ANALYSIS AND FORECASTING by Petterssen. For greater accuracy in measuring and forecasting the weather use these effective methods. 505 pgs., 249 illus., 60 tables, $5.00.

AIR NAVIGATION by P. V. H. Weems. Tells how to navigate planes successfully. 2nd ed., 572 pgs., 306 illus., $5.00.

EXAMINATION COUPON

McGRAW-HILL BOOK COMPANY, INC., 330 West 42nd Street, New York, N. Y.

Send me the books checked below for 10 days' examination on approval. In 10 days I will pay for the books, plus few cents postage, or return books postpaid. (We pay postage on orders accompanied by remittance.)

- ☐ Norcross and Quinn—The Aviation Mechanic, $3.50
- ☐ Petterssen—Weather Analysis and Forecasting, $5.00
- ☐ Chatfield, Taylor and Ober—The Airplane and Its Engine, $3.00
- ☐ Weems—Air Navigation, $5.00

Name .....
Address ..... Position .....
City and State ..... Company F-AV-12-41

(Books sent on approval in U. S. and Canada only.)

"Victory Program" Production Expansion Won't Change Deliveries Before 1943

Washington (AVIATION Bureau): Tall tales of doubling up the aircraft production schedules have some foundation in fact, but they can be mighty misleading when the time factor is left out. Big increases in capacity are in the making, but they won't have any substantial effect on actual deliveries until the latter half of 1943.

Much confusion has been created because tank production figures were the first of the "Victory program" schedules to leak out. These involve real and startling increases over original plans, and it was a natural assumption that other types of armament were being stepped up in proportion. People forgot that until this summer tanks were the step-children of defense. They weren't thought important; they had low priorities; tools were constantly snatched away from the tank arsenals. So it's easy now to speed the tanks merely by putting them at the top of the waiting list on tools and materials.

Planes are another matter. The schedules laid down a year ago were based on what was considered the maximum possible. Then last spring, these schedules were stretched to include a larger amount of heavy stuff. They are now considered as crowding the limits of physical capacity, and no one has any idea that they can be increased much.

Present schedules, however, are designed to flatten out in July, 1943, at a constant production rate of about 4,000 planes a month (50,000 a year). What is now in the works is a plan to have production keep right on climbing rather than level off.

How fast and how far production will climb in late 1943 and 1944 is still anybody's guess. It's a technical question. What's involved is the manpower and material tonnage that can be found and, even more significant, how much production skill can be diverted to planning and tooling for 1944 airplanes without interfering with deliveries of planes in 1942. OPM technicians are now trying to work out the answer.

In terms of numbers of planes, the increase probably won't be startling, since it will be concentrated in heavy equipment—bombers half again or more as big as present four-engine equipment. There may even be temporary reductions in total number of planes resulting from conversion of facilities for production of light types to work on the big ships —a process which is already underway as part of the bomber program.

For the visible future, then, the production situation shapes up about as follows: Production will substantially better 2,500 by the end of this year, reach something between 3,000 and 3,500 by next July. This includes a level production of some 900 trainers a month, which will begin to taper off after July. Thereafter, total output will rise rather slowly to something a little over 4,000 in July 1943. That 4,000 will include about 500 heavy bombers and perhaps 4,500 trainers.

Meanwhile, work must start within the next few months on provision of facilities for the added production in 1943. At best it takes 12 to 18 months to get new plants into production, and on this program it will probably take longer. The tank program and a number of ordnance programs will have first call on available tools and materials. Further plant expansion is going to be a slow job.

Aeronca Expands Plant

Construction is underway on an extension to Aeronca Aircraft Corporation's Middletown, O., plant which will add 30,000 square feet of factory space. The new addition will relieve congestion in the main factory and provide space to step-up production to 2,750 planes per year, according to the company's announcement.

Manufacturers' Priorities Being Changed to New Basis

Washington (AVIATION Bureau): Although the blanket ratings granted to builders of planes, engines, and props have been extended to the end of the year, studies are now underway to develop a new method of giving preference to purchases by manufacturers. The present blanket orders, assigned last April, give a rating of A-1-d to purchases by plane builders and A-1-c to orders placed by manufacturers of engines and propellers.

For next year, two types of changes are contemplated. Most of the bulk items bought by manufacturers will be subject to allocation, and a more restricted type of blanket rating will be used for other purchases.

Objective in changing the form of the blanket priority rating is to avoid some abuses which have developed; in some cases manufacturers have built up excessive inventories and in others they have used the ratings for unessential purchases. One classic case involved attachment of an A-1-d rating to an order for six copies of "How to Win Friends and Influence People;" this didn't win many friends for the company involved.

Most probable change will limit use of the rating to deliveries scheduled over the next ninety days. Manufacturers will still be encouraged to place orders as far ahead as possible, but they won't carry a rating until three months before delivery date. Some thought was given to restricting extension of the rating past the first supplier to goods which will be physically incorporated in the aircraft, but it appears now that this would raise too many difficulties in an industry expanding as fast as aircraft is.

In aircraft, as in other defense industries, allocation of goods is due to assume an ever-increasing importance. This simply means that OPM, without bothering with ratings, tells suppliers to make certain deliveries to certain firms. Aluminum has been on this basis for a long time, and an effort is now underway to work out similar arrangements for steel used in aircraft.

Plan is to have each company submit estimates of its 1942 needs. Then these estimates, which total only a few thousand tons, would be pooled and the work divided up among the steel companies. The steel would be run through early in the year in large lots—thus economizing on the use of steel mill facilities. Difficulty, of course, is to get estimates of needs that will stand up for a whole year. Wrong estimates might cause serious trouble toward the end of 1942. Moreover, some companies don't like the idea of having their orders for specialized products such as forgings and extrusions lumped into a pool; they would rather continue dealing with their regular suppliers.

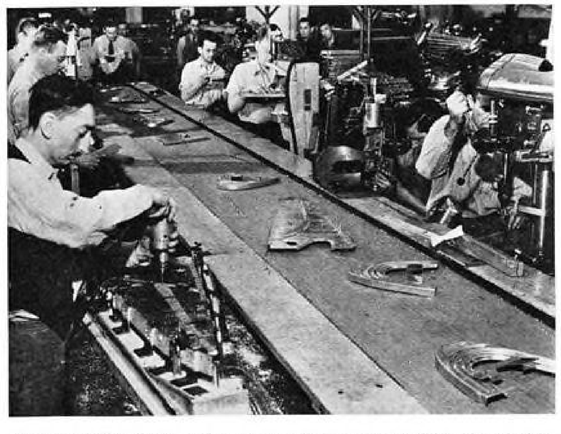

BELT-CONVEYOR LINE mass production technique adopted at Glenn L. Martin Co. has reduced by half man-hours required on certain subassemblies. Each man along the line performs one type of machine or hand operation, attaining greater accuracy and higher speed. The system is to be widely used.

Bigger Third Shifts Sought by OPM

Defense officials are deeply disturbed by the failure of defense industry in general to go onto full three-shift operations. Although most aircraft plants technically maintain three shifts, most second shifts are considered much too small in relation to the size of the first shift, and the adequate third shift is a rare exception.

A survey made about a month ago showed that only one firm in the industry had as many as 17 percent of its employees working the third shift. The

biggest second shift found among major companies comprised 40 percent of payroll. Administration officials recognize the difficulties of labor shortage and plant balance involved in full three-shift operation, but they think aggressive management effort ought to be able to get around them.

Utilization of tools in defense factories at present averages about 50 hours a week, and the administration would like to push this up to 100 hours. The President's speech last month asking longer hours was one gun in the campaign. In another move, conferences are being held with individual firms at which they are confronted with the figures on their tool utilization and challenged to explain why they aren't doing better.

Aircraft Service Association

Formed to coordinate aircraft maintenance and service work of the major manufacturers, the "Aircraft Manufacturers Service Association" has been organized in Southern California. Charter members of the new group are: Lockheed, Douglas, North American Aviation, Harlow, Hughes, Ryan, Vega, Vultee, and Northrop aircraft companies, together with B. G. Corp., Bendix, Pacific Airmotive, Menasco, Pratt & Whitney, and Wright Aeronautical Corp.

Officers elected at the first meeting were: Reagan C. Stunkel, Lockheed, Pres.; Otto Graff, Vega, vice-pres.; James B. Thompson, Vultee, secty.; Thomas Bond, North American, treas.; and Don Sprague, Douglas; Eddie Cooper, Bendix; and James Misner, Hughes Aircraft; were elected committee-men at large.

Assembly Lines

by Robert Colborn

Censorship has clamped down tight on aircraft production figures of all sorts. Not only are monthly production figures under the ban, but information on floorspace, employees, payrolls and the like are now secret. Commerce Department will no longer report exports of aircraft.

Inspiration for the new policy comes from the War Department. It is opposed in OPM and the industry. Efforts are being made to find some indicator of progress—percent of schedule, poundage, dollar value, or the like—which will satisfy the military. This has been unsuccessful so far, and indications are that rigid secrecy will be the rule for some time to come.

International News

SIX OF BRITAIN'S experienced wartime flyers who are now in U. S. to instruct Army pilots in split-second tactics of modern aerial combat. L. to R. (rear): Wing Commander Adolph Malan, Group Captain Harry Broadhurst, Wing Commander Roland S. S. Tuck. (front): Wing Commander John Haworth Whitworth, Group Captain John N. Boothman, Wing Commander H. Idwal Edwards.

October production is the first to go behind the veil. Late that month, Chairman Snyder of the House military affairs committee estimated that October output might reach some 2,200. It is understood that this expectation was comfortably exceeded.

Combat plane production is getting all the benefit of the recent increases in recent months, while trainer output bumps along between 800 and 900 units a month. Twice as many tactical aircraft were built in October, it is believed, as in July. About six times as many were built as in last December. Indications are that rate of output of tactical planes at the end of this year will be nearly eight times that at the end of 1940.

Export figures for August—the last official ones that will be available—show that 533 planes were shipped abroad. Most of these were bombers. Beginings of shipments to Russia probably boosted the figure to 700 in September, and October exports may well have broken a thousand.

Engine exports jumped to 1,071 units in August from less than 500 in July—reflecting the extent to which engine makers are now keeping a comfortable lead over plane production. Bulk of these engines went to Britain as spares for planes previously shipped. A considerable backlog of spares had been built up by August. A large chunk, however, went to China for installation in planes built there.

Chinese are building Curtiss P-36 pursuits and Martin 167 light bombers plus several Russian designs using U. S. engines.

Navy, according to Congressional sources, had 4,124 planes on hand in September, including trainers but exclusive of obsolete and experimental equipment.

Substantial new orders are reported by Randolph C. Walker, president of Aircraft Accessories Corp. A total of $500,000 is involved in an order for 62 complete radio range stations for the CAA, and an order amounting to $135,000 covers 30 radio transmitters for Pan American Grace Airways. Shipments during the third quarter of the year totalled $798,927 as compared with $191,129 in the same period of 1940. Directors have declared a 27 cent dividend payable Dec. 1 to stock of record Nov. 17th.

Mars is an easier name to remember than XPB2M-1, and that's what the Navy now calls the 68-ton flying boat Martin has built for it. A few more figures have been let out on it: Power plant is four Wright Cyclone Duplex engines of 2,000 hp. each. The three-bladed propellors, 17.6 ft. in diameter, are said to be the largest ever installed on an airplane. Mars will carry a collapsible motor boat aboard and its hull draws five feet of water.

Specifications on the latest flying fortress, the B-17E, are as usual available in England in somewhat more detail than here. According to *The Aeroplane* it mounts three powered gun turrets, weighs 30 tons (as compared with 25 for the B-17-D), cruises at 35,000 ft. elevation, has top speed better than 300 m.p.h. and costs about $300,000.

Twin-engined trainers are getting increasingly important as the percentage of multi-engine combat equipment on the production schedules increases. One of the biggest is Beech's new AT-11 designed for training bombardiers and gunners. Mounting two nine-cylinder 450-hp. P & W engines, it carries guns and bomb racks, can be used for training crews of three or four. It has a 47 ft. span, 35 ft. length, twin tail, retractable wheels.

Bomber pilots are to be trained in the Curtiss AT-9, now undergoing service test. This, like the AT-11, is an all metal low-wing monoplane, but it's a smaller ship powered by two 280 hp. engines. It weighs over 5,000 lb., has a 40 ft. wing span. The ship is designed to have the flying characteristics of a bigger one and has a rather complete complement of instruments.

Repair parts for any registered and certificated civil airplane may now be bought under an A-10 priority rating. This applies whether the order is placed by the owner or a dealer.

A ski for light planes made of 15-ply plastic-bonded birch plywood has been developed by the Heath Co. of Benton Harbor, Mich.

Second Eastern light plane exhibition will be held in Grand Central Palace, New York City, Feb. 21-March 1.

Solar Aircraft Company, San Diego, has acquired 30,000 additional sq. ft. of floor space and will employ 400 more men on exhaust manifold manufacturing operations by Jan. 1, 1942, according to E. T. Price, pres.

Alclad, as a name for a type of aluminum, has been released by the Aluminum Co. In future any concern making aluminum with a strong alloy core and a pure aluminum surface can call it Alclad. Hitherto the name has been exclusive property of the Aluminum Co. of America.

Republic delivered more planes to the Air Corps in October than in the entire first six months of the year. This probably means something between 50 and 100 P-43 "Lancer" radial-engine pursuits. Production of P-43s is now carried on in the newly-completed 500,000 sq. ft. plant. Early next year, when 2,000 hp. P & W engines become available, this plant will be re-tooled for the more advanced P-47 "Thunderbolt" fighter. Available engines of this size are now going into Martin's B-26 medium bomber. The present Lancer uses an engine of about 1,200 hp.

Consolidated is now delivering about $18,000,000 worth of planes a month, hopes to triple that figure by July, 1942. In the first ten years of its existence, Consolidated also delivered about $18,000,000 worth of planes. Since 1924, the company has built something over 2,300 planes with a total value of $140,000,000.

Recent Awards

War Department

Elgin National Watch Co., Elgin, Ill., $172,080 for aircraft clocks.

Curtiss-Wright Corp., Caldwell, N. J., $231,476 for propeller assemblies and parts.

Wright Aeronautical Corp., Paterson, N. J., $149,346 for tools for engines.

Sparks Withington Co., Jackson, Mich., $233,851 for airplane equipment.

Weaver Mfg. Co., Springfield, Ill., $261,750 for portable engine hoists.

Sperry Gyroscope Co., Inc., Brooklyn, N. Y., $37,534,980 for gyroscopic instruments.

Manning, Maxwell & Moore, Inc., Bridgeport, Conn., $628,320 for pressure gages.

Firestone Tire & Rubber Co., Akron, Ohio, $830,729 for oxygen cylinders.

Aeroproducts Div. of General Motors, Dayton, Ohio, $106,900 for hub and spinner assys.

Hickok Electrical Instrument Co., Cleveland, Ohio, $335,351 for thermometer indicators.

Platt-LePage Aircraft Co., Eddystone, Penna., $144,662 for plane equipment.

Sparks-Withington Co., Jackson, Mich., $262,368 for mooring kits.

Lewis Engineering Co., Naugatuck, Conn., $235,780 for thermometer indicators.

Oneida, Ltd., Oneida, N. Y., $200,626 for bomb shackle assys.

P. R. Mallory & Co., Inc., Indianapolis, Ind., $225,354 for release assys.

Holtzer-Cabot Electric, Boston, Mass., $115,200 for inverters.

General Electric Co., Schenectady, N. Y., $477,375 for tachometer indicators.

Longines-Wittnauer Watch Co., Inc., New York City, $239,240 for clocks.

Curtiss-Wright Corp., Buffalo, N. Y., $107,434,037 for airplanes and parts.

Lockheed Aircraft Corp., Burbank, Calif., $92,277,800 for airplanes and parts.

Emerson Electric Mfg. Co., St. Louis, Mo., $20,029,362 for machine gun turrets.

Fairchild Engine & Airplane Corp., Hagerstown, Md., $4,329,908 for airplanes and parts.

Bendix Aviation Corp., Bendix, N. J., $195,422 for parts for generators

Douglas Aircraft Co., Inc., Santa Monica, Calif., $78,264,093 for planes and parts.

Glenn L. Martin Co., Baltimore, Md., $19,007,247 for turret assemblies.

General Motors Corp., New York City, $478,774 for hardware.

Thomas A. Edison, Inc., West Orange, N. J., $248,040 for thermometer indicators.

Service Tool & Engineering Co., Dayton, Ohio, $219,932 for aircraft fittings.

Boeing Aircraft Co., Seattle, Washington, $189,217 for parts for aircraft.

Sperry Gyroscope Co., Inc., Brooklyn, N. Y., $370,498 for maintenance parts for pilots.

General Motors Corp., Indianapolis, Ind., $124,459,170 for aeronautical engines.

Bendix Aviation Corp., Bendix, N. J., $10,753,723 for aircraft instruments.

Square D Co., Elmhurst, N. Y., $2,997,565 for instruments.

Bendix Aviation Corp., Bendix, N. J., $2,208,450 for supercharger regulator assys.

Bendix Aviation Corp., Bendix, N. J., $1,686,830 for altimeters.

Air Cruisers, Inc., Clifton, N. J., $1,047,592 for oxygen cylinders.

Chandler-Evans Corp., South Meriden, Conn., $1,320,877 for fuel pumps.

Chandler-Hill Corp., Detroit, Mich., $820,900 for fuel pumps.

Sperry Gyroscope Co., Inc., Brooklyn, N. Y., $781,524 for automatic pilots.

J. P. Seeburg Corp., Chicago, Ill., $343,150 for control assemblies.

United Aircraft Corp., East Hartford, Conn., $478,646 for parts for engines.

Electronic Laboratories, Inc., Indianapolis, Ind., $104,760 for inverters.

Westinghouse Electric & Mfg. Co., Dayton, Ohio, $632,500 for voltage regulators.

Independent Engineering Co., Inc., O'Fallon Ill., $829,309 for oxygen cylinders.

Crosley Corp., Cincinnati, Ohio, $661,032 for shackle assemblies.

Bendix Aviation Corp., Bendix, N. J., $779,453 for maintenance parts.

Bendix Aviation Corp., Bendix, N. J., $763,135 for starter, switch and solenoid assys.

Jack & Heintz, Inc., Cleveland, Ohio, $808,500 for starter assemblies.

Leece-Neville Co., Cleveland, Ohio, $648,587 for panel assemblies.

Crosley Corp., Cincinnati, Ohio, $501,000 for release assemblies.

Aviation Mfg. Corp., Williamsport, Penna., $776,000 for propeller blades.

Wright Aeronautical Corp., Paterson, N. J., $559,972 for maintenance parts for engines.

Ryan Aeronautical Co., San Diego, Calif., $103,000 for airplanes.

Service Tool & Eng. Co., Dayton, Ohio, $187,884 for assemblies.

Leece-Neville Co., Cleveland, Ohio, $240,625 for assemblies.

Continental Motors Corp., Muskegon, Mich., $277,120 for parts for engines.

Manning, Maxwell & Moore, Inc., Bridgeport, Conn., $372,614 for gauge units.

Charles E. Smith & Sons Co., Cincinnati, Ohio, $328,080 for assemblies.

Spriesch Tool & Mfg. Co., Inc., Buffalo, N. Y., $367,400 for assemblies.

Iron Fireman Mfg. Co., Portland, Oregon, $553,796 for mount assemblies.

Bendix Aviation Corp., Bendix, N. J., $1,210,320 for airspeed indicators.

The Yale & Towne Mfg. Co., Stamford, Conn., $505,000 for pump assemblies.

Republic Aviation Corp., Farmingdale, L. I., $3,130,349 for maintenance parts.

Sparks-Withington Co., Jackson, Mich., $633,148 for bomb hoist assemblies.

Rheem Mfg. Co., Chicago, Ill., $112,500 for fin assemblies.

Bendix Aviation Corp., Bendix, N. J. $327,600 for generator assemblies.

P. R. Mallory & Co., Inc., Indianapolis Ind. $468,000 for release assemblies.

Holtzer-Cabot Electric Co., Boston, Mass., $142,560 for inverters.

Holtzer-Cabot Electric Co., Boston, Mass., $444,830 for inverters.

Harrisburg Steel Corp., Harrisburg, Penna., $2,951,980 for gas cylinders.

Taylor-Wharton Iron & Steel Co., Easton, Penna., $1,493,457 for gas cylinders.

Sparks-Withington Co., Jackson, Mich., $503,400 for release assemblies.

General Electric Co., Schenectady, N. Y., $1,486,250 for generator assemblies.

Navy Department

None

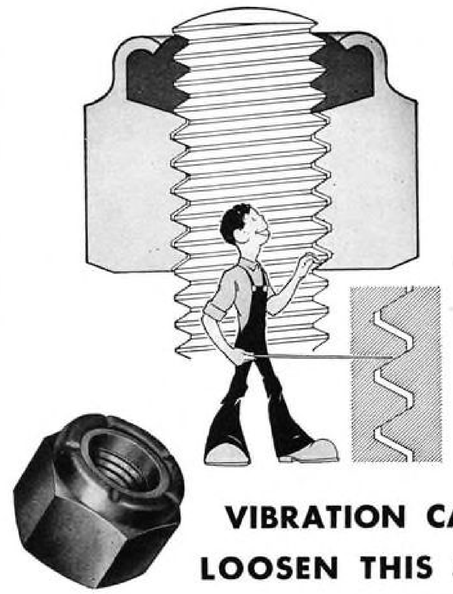

VIBRATION CAN'T LOOSEN THIS NUT

. . . because its thread faces are held in pressure-contact

WHEN an Elastic Stop Nut is applied, the end of the bolt presses against the fiber locking collar which is built into the head of the nut. This forces the nut outward and takes up the play between the threads of nut and bolt . . . establishing a metal-to-metal pressure-contact.

As the nut is wrenched onto the bolt, a thread is impressed into the bone-hard but resilient fiber. The continued resistance of the fiber maintains and increases the pressure-contact between the threads, with the result that thread play becomes impossible.

The collar, being resilient, absorbs both vibration and shock. It never releases its hold . . . that is why Elastic Stop Nuts remain tight under all flying conditions.

Used on all American military and transport planes, and on the majority of foreign planes.

Catalog contains a graphic explanation of the Elastic Stop principle, presents test and application data, illustrates uses, and lists the complete line of nuts • **Write for a copy.**

ELASTIC STOP NUT CORPORATION
2320 VAUXHALL ROAD • UNION, NEW JERSEY

Elastic Stop SELF-LOCKING NUTS

Canadian Aviation News

By James Montagnes

Pilots training in Canada under the British Commonwealth Air Training Plan now train for 28 weeks instead of 24 weeks, according to an announcement of the Royal Canadian Air Force headquarters at Ottawa on October 31. The course was extended two weeks early in October from 22 weeks. Now pilots spend 8 weeks in the initial training school, 8 weeks in the elementary flying school, and 12 weeks in the service flying schools. Of most importance in the extended course is the time now given to aircraft recognition and in air navigation, while physical training and organized games have taken on more significance in the training plan. In conjunction with the organized games increase has come an order to commanding officers to keep airmen friends as closely together as possible in schools and on assignment for overseas since "team-work is essential to air-war efficiency . . .,and the most effective team is composed of friends who know each other's capabilities and have learned to work, play and fight together."

In initial training schools considerably more study will be possible through an increase in lectures. Additional flying hours will be available in elementary flying schools, and instruction will be more equably spread in the service flying schools. Some increase in flying hours and in night flying will also be possible. Training in spotting types of aircraft is being developed through the use of colored sketches and silhouette lantern slides and the playing of card games such as rummy with playing cards bearing unlabelled aircraft silhouettes instead of the usual suits.

Operational schools are also being organized now in Canada to allow pilots, observers and wireless-air gunners to learn to work together as teams, training which till recently had all been done after the graduates of the Canadian schools had gone overseas. Between 30 and 40 Royal Air Force schools are being established in Canada, to be operated under Canadian government authority in conjunction with the British Commonwealth Training Plan, according to Canadian Air Minister C. G. Power.

Fairchild Aircraft, Ltd., Montreal, reports for its fiscal year ending June 30, 1941, net profits of $39,429, after interest, depreciation, provision for loss on inventory of Sekani type aircraft, provision for income and excess profits taxes and all other charges. This compares with a net profit in the previous year of $11,444. Provision for income and excess profits taxes amounted to $27,096 compared with $13,018 in the previous year. Operating profit for the year was $208,943 against $167,522 last year. The report shows uncompleted contracts at June 30 of over $6,500,000, nearly three times the amount of the previous fiscal year.

Figures released by the Royal Canadian Air Force during October show strength of the force at that time at 83,000 compared with pre-war strength of 4,500. Canadian ground crews are now operating in Britain and soon most Canadian squadrons will be serviced by Canadian mchanics.

ONE OF THE ENCLOSED FAIRCHILD TRAINERS of the type delivered to Norwegian flyers training in Canada. M62 Ranger equipped.

On Schedule

By "Vista"

The main line of Japanese penetration into the Southern Pacific, perhaps patterned after German practices during this war, has been the expansion of routes by the Japanese airline, which during the past year and a half have moved down to within easy striking distance of English and American military and commercial airbases in the Pacific ocean. Quite a while ago this column mentioned the new route to the Palau Islands, which at the time very obviously was only started by Japan for military reasons, even though the Japanese claimed it had great commercial value. It crossed Pan American's Pacific services, and since it was officially opened, little more of news value was heard about it, except perhaps the fact that Japanese travelers would have to do without hostesses or "geishas with wings".

Suddenly, like a bombshell, news came during the middle of October that Portugal, obviously under severe German pressure for concessions to the Axis partners, had granted the Japanese landing rights at Dilli, capital of Portugal's half of the island of Timor, one of a large group of islands very near to the coast of Northern Australia, and about two hours' flying from Port Darwin. The issue was made explosive due to the fact that the Netherlands owned the other half of this island, and that it contained important military and commercial airplane bases, besides constituting the jumping off point of several commercial airlines to Australia, 400 miles distant.

The flight from Palau to Dilli would involve the crossing of a major part of the Netherlands East Indies archipelago, many islands of which are being fortified as naval and air bases for the protection of one of Democracy's main sources of many vital raw materials. Though negotiations have not yet started at this writing, Japan will have to obtain the necessary permits from the Netherlands to fly across its territory, and unless the whole matter is used as the spark in the powder barrel of the Pacific, the route may well be talked to death.

Immediate action appears to have been taken by both the Australian and Netherlands governments to counter-act this latest move of Japan's "commercial" airline; action which was speeded up when the Nippon press openly crowed about this route's military value. Interesting sidelight to the whole matter is the fact that this government has for many years refused permission to the Netherlands to let its commercial airliners fly into Manila, claiming that such a franchise would force them to give similar liberty to Japan, thereby aiding her southward expansion; present developments perhaps will speed the completion of a faster connection between Indies and equally vital Philippines.

Pan American Airways' Clipper passengers to New Zealand have, since the start of this service, been flying to the Australian continent with Tasman Empire Airways. This airline, flying over what is admittedly one of the most difficult airline routes in the world, has accomplished what seemed practically impossible a few years ago, a regular three times fortnightly service from Auckland to Sydney, with a load factor averaging 85 percent per flight. Short flying boats with a 16 passenger capacity are used; grossing 48,000 pounds, the flights take an average of 9¼ hours, though the shortest flight record is 6⅞ hours and there also have been flights that have taken 12 hours and over; all flights have to be made against or with the constant east headwind, which accounts for the large time variances.

Slowly but surely the American commercial airline link around the world is being completed—on November 29 Pan American will inaugurate the new service to Leopoldville in the Belgian Congo, where the new service will connect with B.O.A.C. airliners which will, for the time being undoubtedly, fill in the gap from the Congo to Singapore. Pan American's air ferry service across Africa has already been in operation for some time, 'way ahead of schedule.

GRUMMAN J4F-1's JOIN THE COAST GUARD

☆ Grumman versatile pocket amphibians, "the airplanes of a hundred uses," are now performing inshore and coastal patrol duties for the U. S. Coast Guard at their bases on the Atlantic, Pacific, Gulf Coast, and the Great Lakes.

GRUMMAN AIRCRAFT ENGINEERING CORPORATION

BETHPAGE, LONG ISLAND, NEW YORK

Sperry Gyroscope Co. has separated the administrative and executive functions of its engineering and sales departments. P. R. Bassett, v.p.-engineering, retains executive direction of engineering and E. C. SPARLING (l.), new chief engineer, assumes administrative duties. R. B. Lea, v.p.-sales, retains executive direction of sales, and M. L. PATTERSON (r.), new general sales manager, takes on administrative duties.

New Chief of the Public Relations Branch, Headquarters, Army Air Forces, at Washington, is LT. COL. ARTHUR I. ENNIS. He had previously been Chief of the Still Picture Section, Pictorial Bureau.

Gladsen-Mitchell

A. P. FONTAINE (above) succeeds E. G. Bruce as chief engineer of the Engineering & Development Dept. of Vultee Aircraft, Inc. Bruce is made the company's chief research engineer.

Aircraft Tools, Inc. has appointed GLEN PERIMAN factory manager. Formerly chief tool designer at North American Aviation, he was with Douglas for nine years previously, in charge of small tools.

Kaiden-Keystone

HARRY L. BILL, new vice pres. and gen. manager of Greenfield Tap & Die Corp., was from 1939 president of United Aircraft Products, and in 1935 vice pres. of Pioneer Instrument Co.

International

Parachutist ARTHUR H. STARNES landed safely from a 30,000 ft. jump, opening his chutes at about 1500 ft., thereby establishing a record for the longest free fall made in the United States.

In his new post of Oklahoma City district traffic manager, ROBERT T. PHINNEY, JR. takes charge of Braniff Airways' sales and traffic throughout the state. He joined the line in April, 1939.

Appointment of P. M. DOLLARD as secretary-treasurer of Adel Precision Products Corp. is announced by H. R. Ellinwood, pres. Dollard severs a 17-year connection with Sanderson & Porter.

LAWRENCE D. BELL accepted for the Bell Aircraft Corp., the award of achievement presented by George Washington University for the development and production of the Airacobra.

K. R. JAMESON, formerly with Pacific Airmotive Corp., has been elected vice president in charge of sales of Airplane Manufacturing & Supply Corp., according to Earl Herring, president.

Wide World

Navy's newest aircraft carrier Hornet is commanded by CAPT. M. A. MISCHER. Commissioned at the Naval Operating Base at Norfolk in Oct., the Hornet displaces approximately 20,000 tons.

The American Society of Tool Engineers has suffered the loss of FORD R. LAMB, on Oct. 26th. A charter member, past president, and executive secretary, he had made the ASTE his lifework.

New appointments at Chandler-Evans Corporation are HOWARD L. HARTMAN (l.) as assistant general manager, and THOMAS D. HOGG (r.) as factory manager. For seven of his eleven years with Pratt & Whitney Aircraft Division, Mr. Hartman had been assistant secretary. Mr. Hogg is promoted from shop superintendent, having joined Chandler-Evans in 1939 as superintendent. He was with the RAF during the World War.

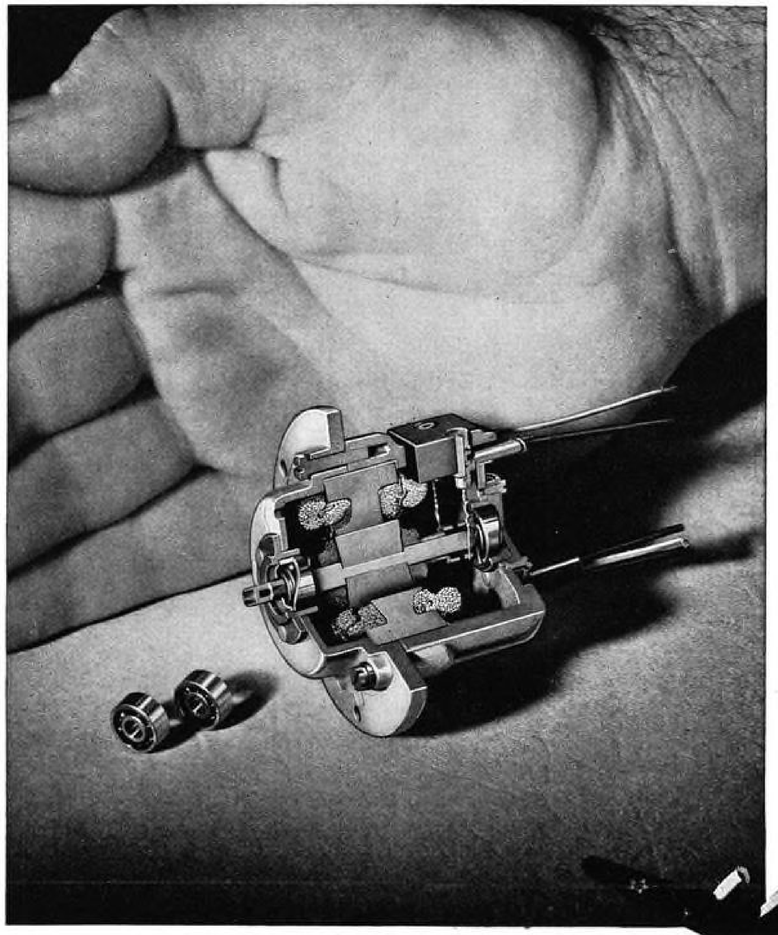

Nerves for BOMBERS

● Working in pairs, as transmitter and receiver, literally hundreds of these tiny Pioneer* Autosyn Motors in a large bomber tell the pilot the exact functioning of remote, vital parts of the ship.

Like the human nervous system, these motors must be quick-acting, sensitive. Hence, the use of two precise, ultra-sensitive New Departure ball bearings on each rotor shaft. These bearings are delivered to assemblers in oil-filled glass vials, untouched and uncontaminated by human hands.

This is only one phase of the defense effort for which New Departure is working night and day.

New Departure, Division of General Motors, Bristol, Connecticut.

* *Pioneer Instrument, Division Bendix Aviation Corporation.*

New Departure

BALL BEARINGS FOR DEFENSE

3051

Douglas "Cold Room"

At altitudes above 30,000 ft. where bombers and fighting planes are now operating in the present air war, where temperatures range from —48 to —67 deg. F., the intense cold has a deadly effect not only on men, but on their machines as well. For instance, many hose connections get brittle, crack wide open longitudinally, or snap in two. Lubricating oil hardens to the consistency of thick tar. Consider, too, the problems met with by General Electric in developing its turbo-supercharger, part of which is in the engine's exhaust stream at 1600 deg. F.; and the other end touching, at 40,000 ft., the outside air at 67 below.

To simulate conditions and effects of extreme low temperatures on the various components of high-flying aircraft, Douglas Aircraft Co. has built a scientific ice box where men and materials may be thoroughly pre-tested and proven. Experiments have been under way since July 20, 1941, the test program including a study, under polar conditions, of fuel, oil and hydraulic systems, controls, structural parts, insulation, heating, windshield deicing devices, bearings, tolerances, metal fatigue, etc.

One great advantage of the Douglas cold room is that its size, about 14x16x8 ft., permits workmen to conduct experiments on the spot, rather than through glass windows and remotely actuated dial readings outside.

Despite extremely low temperatures, from —40 to —104 deg. F., men are able to work in the room without too much discomfort. Wearing sheepskins and air-tight suits made of horsehide thickly quilted with the finest merino wool, the clothes are laced together with zippers from tip to toe and supported from the shoulders by an ingenious suspender system.

A helmet, resembling a diving bell and equipped with earphones and telephone mouthpiece, is made of spun aluminum—not dural—and welded to padded shoulder pieces of the same metal. A fixed visor of laminated Plexiglas separated by air chambers, and hermetically sealed after all moisture has been removed, effectively prevents fogging. Inside, the helmet is lined with felt and chamois skin. Neither suit nor helmet is electrically heated.

Since a principal danger to workmen in the cold room is the possibility of pneumonia, the suit is valved so its wearer breathes air warmed by his own body. The intake is at the waist, the exhaust in the helmet dome.

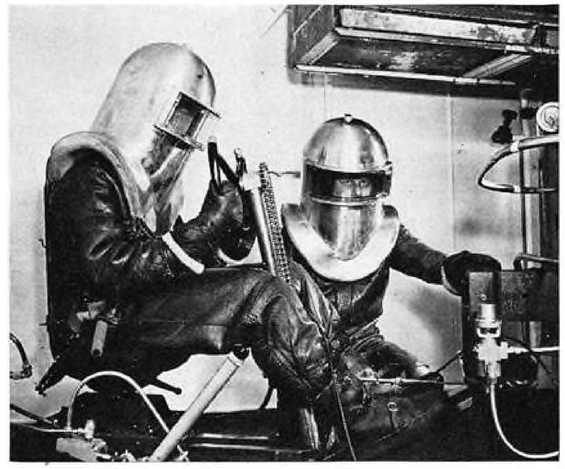

CLOSEUP OF RESEARCHERS in coldroom at work on high altitude tests. Note man at plane control wheel, and air intake hose for breathing near waist. Outlet in dome of helmet.

Temperatures in the "frigidaero" are lowered by means of a combination of dry ice (CO_2) and methyl alcohol. Agitated together and pump-circulated through a so-called heat-exchange unit, this apparatus will cause the temperature to fall from plus 80 deg. to minus 104 within 2 hrs.

The room is insulated with 12 in. thick fire and corrosion proof spun glass. Windows consisting of four panes of hermetically sealed glass are installed to permit outside observers to watch the workmen —or victims, according to the way one feels about 104 below.

One man never goes into the frigidaero alone. Additional safety precautions include instant communication outside, by means of the telephonic equipment fitted in the helmets, and by outside observation.

The Douglas cold room tests are conducted by engineering development in charge of J. R. Goldstein. Associated with him in this work are E. P. Wheaton, Dr. W. B. Klemperer and T. N. Floyd. Mr. Floyd designed the cold room and coordinates its experiments.

Of further interest is the report that one of the compression chambers in the Douglas altitude laboratory will soon be hooked up to the cold room so that aircraft parts and equipment may be subjected to the effects of high altitudes as well as firmamental cold.

New Drafting Board

Taking a load off the feet and stomachs of the men who have spent most of their lives standing or leaning over drafting tables, a new type of engineering drafting board which cranks up and down like the window of an automobile has been developed by the engineering department of The Glenn L. Martin Co. in Baltimore.

When not being used, the board lies flat on its desk top. The draftsman, seated in his chair, twirls a small window-type crank which raises the board to the desired level. Then, by means of a horizontal bar beneath the edge of the board, he adjusts it to the proper angle. The board is kept in firm position by a "dog" controlled by the bar, which drops into a notched locking sector.

The Transmissometer

National Bureau of Standards is developing an instrument to determine automatically the extent to which light is transmitted through the atmosphere under varying conditions as an aid in improving lighting systems of airports and airways.

The transmissometer, as it is called, will measure the transmission of light between two points and relay a code signal to some remote point, by wire or radio, there to be recorded.

Instrument is said to have worked satisfactorily both in the laboratory and in field tests. Last summer at Nantucket Island, one of the foggiest locations in the U.S., considerable data were obtained to correlate readings of the instrument with the visual range under different atmospheric conditions.

When its development has reached a wholly satisfactory stage, the transmissometer will be installed at representative localities and the readings correlated with estimates made by trained observers. Such an instrument would make it possible for aviation weather observers to give measured values of visibility instead of depending on estimates of visual range.

IN ACHIEVING MASS PRODUCTION of hydraulic valves, Adel Precision Products Corp. has developed such complete test panels as these, each fully equipped for test pressures of 200 to 10,000 lb. per sq. in.

Seaboard Plans Line Boston-Miami-Orleans

Washington (AVIATION Bureau)—Seaboard Airways' application for a certificate to operate a route from Boston via Washington to Charlotte, and splitting there to Miami and New Orleans, is the subject of hearings by the Civil Aeronautics Board as this is written.

A number of other airlines, including Eastern, American, Penn Central, Pan American, some railroads and some cities have intervened against Seaboard. In addition to Seaboard, other airlines, including Canadian Colonial, National, State, Penn Central have made applications for establishment of another East Coast line.

The present application is made by a Seaboard concern which no longer has any connection with the railroad of that name. Alvin P. Adams, formerly head of Western Air Express, is president of Seaboard, and the other officers are members of Ladenburg Thalmann, a New York financial house. They have formed a syndicate to finance the project.

If the certificate is granted, the company expects to start operations July 1, 1943. Its officials are aware that even though a certificate is granted, permission of the Army is still necessary before planes can be allocated for additional civil routes. This restriction is made under joint agreement between the Army and the Civil Aeronautics Authority.

Company expects to use 11 planes at the start—either Lockheed "Excalibur" 44s, or Curtis CW 20s, or Douglas DC-6. The Lockheed 44 is a four-engined plane, smaller than the Constellation, three of which are under construction for another airline. None of the 44s has yet been built. The CW 20 is being built, in small numbers up to now, for the Army Air Force for use as transports. The DC-6, not under construction as yet, will be an enlarged and modernized version of the DC-3, for the past several years used on most domestic airlines and throughout the world.

Seaboard's proposed schedule calls for a local trip each way each day during the first month, using day planes. During the second month, a night local trip each way will be added. In the sixth month an express trip will be added each way daily, and in the seventh month an extra express to Miami is called for.

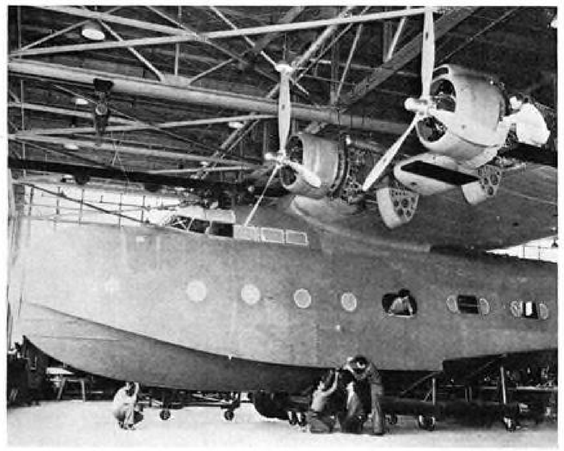

GIANT HULL and port engines of one of three Vought-Sikorsky flying boats rapidly nearing completion for American Export Airlines at Stratford, Conn. They are designed for non-stop crossing of the Atlantic with full passenger, mail and express loads, at a cruising speed of 175 m.p.h. Sleeping accommodations for 16 passengers are provided, but they can be equipped to carry 40 on daytime flights.

Later on, it is expected, a high speed cargo trip would be put on the Boston-Washington section, possibly to be extended later to Charlotte, where the load would be split between the regular planes.

Representatives of the company said that these schedules will be much faster than would be possible with present-day equipment. They said that both Miami and New Orleans seemed well pleased with the prospect of the service. They stated that another line on the East Coast, to compete with the one existing line, is desirable under the law. American Airlines follows the coast only as far South as Washington, where it turns inland on its route to California.

PAA Calls On Fijis Starts African Service Doubles Far East Runs

The Fiji Islands, with $20,000,000 annual business in cane and copra, a strategic position in the South Pacific amid the Far East rumpus, and just 1500 miles from the Japanese Caroline Islands, got their first service Oct. 30 with a new Pan American Airway stop on the route to New Zealand.

The Fiji Islands recently lost all contact with the outside world because shipping companies had removed boats for war business; only the Matson Line stop, once a month, remains. So the clippers come in handy. For Pan American, the new service sets up two additional fuel stops; one alternate at Palmyra Island, and one at Suva, capital of Fiji, which add more than 30 percent payload. This is important, with the Mediterranean - Suez route closed; more Europe-bound goods, mail, passengers will be flown to the U. S. and across the Atlantic.

To strengthen its links to the far East, PAA has moved the S-42B, 4-engined Sikorsky Bermuda Clipper to Manila, whence it will run twice a week to Hong Kong. The regular Pacific Clippers thus can go on through to Singapore each week instead of every other week as before.

PAA started, after vast preparations, its 11,898-mile service from Miami to Leopoldville, Belgian Congo, to Khartoum, Egyptian Sudan. (See AVIATION, Nov. 41, page 126). Company says this is its biggest job to date. The development is in three phases: Clipper transport service to Leopoldville; overland transport route from Leopoldville to Khartoum; ferry service for U. S.-built military planes to Britain, China, Russia. (Some ferried planes go also by way of Guam, Midway, Wake Islands; some by way of Alaska to Siberia; and most over the North Atlantic from New Foundland)

Postmaster General Frank C. Walker started mail service on the new PAA African route November 29. Not least pleased were the stamp and cover collectors.

Two Airline Accidents End 6-mo. Safety Run

Washington (AVIATION Bureau)—Two airline accidents on October 30, killing a total of 34 persons, ended the new no-fatality record of exactly six months and three days, following the Jonesboro, Georgia, accident, in which eight persons were killed, and Capt. Eddie Rickenbacker was injured.

One of the October 30 accidents was a Northwest Airlines DC-3, at Fargo, N. D. The ship apparently was making an instrument approach to a landing when it contacted the ground about three miles from the field, bounded across a ravine, and burned, killing 14 persons.

The other was American Airlines, DC-3, which struck an open field 14 miles west of St. Thomas, Ontario, on the Buffalo-Detroit Route, and burned, killing 20 persons.

There will be no official information on the cause of the accidents until the Civil Aeronautics Board, which started investigations immediately, issues its reports some weeks hence. Pilot Clarence Bates, only survivor of the Northwest accident, is reported saying that the plane vibrated and the controls stiffened as he made his landing approach. He had picked up what he said seemed a small amount of ice.

Survival of the pilot in a major accident is an important stroke of good fortune, on other than his own account. Investigations of major accidents do not often have the advantage of an expert eye witness report.

There were 10 fatal airline accidents in 1936; six in 1937; eight in 1938; three in 1939; three in 1940; and thus far five in 1941—St. Louis-TWA, Jonesboro-EAL, Vero Beach-EAL, and the two under discussion.

The longest no-fatality period was March 26, 1939 (Braniff at Oklahoma City) to November 4, 1940 (Penn-Central at Lovettsville) — just over 19 months. This was a domestic record, however, as Pan American Airways had a fatal accident in Brazil on August 31, 1940, killing 25 persons, including the crew of four.

The October 30, 1941 accidents of Northwestern and American did not seem to stir up any moves to re-organize the Civil Aeronautics Authority, as other accidents did.

Studies Mail Pay

Washington (AVIATION Bureau)—The Brookings Institution, endowed research group which often publishes analyses on public problems, has upset the Civil Aeronautics Board mildly with a statement, in a comprehensive report on "Air Mail Payment and the Government," that profits on some airlines have increased so much that the Board must now consider whether to take its first step toward regulation of passenger and cargo fares. This it is empowered by law to do when it sees fit.

The Board itself appears to be making no separate study of this matter, except as broad questions of policy develop in individual rate cases.

TRANSPORT DOINGS

Pan American makes a gross profit of $806,200 in the sale of three Boeing clipper ships to the British, for $1,035,400 each, according to a CAA examiner's report.

Transcontinental's new salary scale gives hostesses $115 per month to start, increasing to $135 at the end of the first year of service. Periodical increases are granted with increased seniority. The new scale is in line with recent increases granted other TWA personnel.

Eastern adds Atlantic City as a passenger and mail stop on its route between Philadelphia and Baltimore. Company is hiring pilots at the rate of 10 per month and in the event that Douglas DC-3 Silverliners now on order are delivered in 1942, one hundred more pilots will have been added. Service between New York and Brownsville, and between New York and San Antonio, will be one continuous route, consolidating routes Nos. 5, 20, and 42.

Chicago and Southern's stewardesses give matrimony as the reason for leaving their jobs in 99 percent of the cases. Each of nine flight captains will be given a Gruen watch by R. L. Simpson, Pres., of the New Orleans Association. The pilots to receive watches have flown more than a million airline miles.

Penn-Central recently carried its 900,000th passenger. O. C. Durham, noted botanist, completes a 3,000 mile aerial study of the distribution of hay fever pollen for the company.

Transcontinental, Mid-Continent, Braniff and Chicago & Southern will serve as guest lecturers at Stevens College course designed to familiarize young women with commercial airline operations and to point the way to the careers in the industry.

Air Express reached an all-time peak in August with 1,842,858 pounds carried. The average haul of air express has decreased in the past two years from a high of 605 miles in 1937 to 554 miles in 1940 and the downward trend continues.

FASTER More Efficient LIFTING

● Release Men for Other Work
● Increase Plant Capacity
with

CURTIS AIR HOISTS

A tough problem — Insistent pressure for increased output in the face of a shortage of skilled labor. The solution — Install a CURTIS One-man Air-Power Hoist and release some men for other jobs and at the same time make the lifting job faster and easier; also more efficient by reducing man fatigue.

Illustrated above is a large automobile manufacturing plant that uses CURTIS Air Hoists to lift and place motors on testing blocks. This continuous heavy duty job is now a fast, easy, one-man operation.

CURTIS All Steel Air Hoists are smooth in action, speedy, and efficient. They provide extreme accuracy of control and will handle the most delicate hoisting operations. Any workman can operate them — the hoist does all the work by air power. Dead weight is extremely low, allowing light supports as well as easier moving of trolley mounted loaded hoists. Available in pendant, bracketed and rope compounded types. Cannot be damaged by overloading and are unharmed by steam, fume or dust-laden atmospheres.

For complete information as to how you can step up production and lower costs in your plant, send for free booklet "How Air is Being Used in Your Industry"— mail coupon today.

CURTIS

St. Louis New York
Chicago San Francisco
Portland

CURTIS MANUFACTURING COMPANY
1957 Kienlen Avenue, St. Louis, Missouri

Please send me your free booklet "How Air is Being Used in Your Industry" and further details concerning Curtis Air Hoists.

Name.....
Firm.....
Address.....
City.....State.....

CONSOLIDATED B-24'S FABRICATED WITH BOOTS SELF-LOCKING NUTS

80,000 POUNDS LIGHTER— THANKS TO A "MAGIC" NUT

A single fleet of planes, being built for the United States Government by Consolidated, will carry 80,000 pounds* less dead weight, solely through the use of Boots Self-Locking Aircraft Nuts. As one result, they can lift that much more fire-power, armament or fuel.

Boots Nuts are of sheet metal construction—have all the required tensile strength of old-fashioned nuts. They "outlast the plane," and can be reused as often as required in the airplane's maintenance.

The only one-piece, all-metal, self-locking nut to pass the rigid tests of the Army, Navy and Civil Aeronautics Authority.

*Consolidated's chief engineer figures a weight saving of 40 to 80 lbs. per B-24 due to use of Boots vs. nuts used in the past.

BOOTS

AIRCRAFT NUT CORPORATION

NEW CANAAN, CONNECTICUT

Control of Culver Aircraft Corp. has been acquired by Walter H. Beech and Charles G. Yankey, president and vice president, respectively, of Beech Aircraft Corp. The new controlling interests have taken over management of the Culver plant which is working on approximately $1,000,000 in government orders and several hundred thousand dollars of commercial orders.

Aviation financing: New York and Philadelphia bankers plan to offer to the public 20,000 shares of Class A stock of **All American Aviation, Inc.** at $4 a share. The offering does not constitute new financing on the part of All American Aviation. Riter & Co. of New York recently sold 140,000 shares of **Jacobs Aircraft Engine Co.** at $5.25 a share. This stock was sold for the accounts of certain stockholders. Other financing included an offering of 150,000 shares of capital stock of **Adel Precision Products Corp.** by Detroit and Los Angeles bankers. The stock was priced at $3 a share.

Seaboard Airways, Inc., formerly owned by the receivers of Seaboard Airline Railway, will be financed by the banking firm of Ladenburg Thalmann & Co. according to a recent court authorization. Under the agreement, the bankers will finance the airways' application before the CAB for permission to start operations.

Kellett Autogiro Corp. has repaid a $175,000 loan obtained from the Reconstruction Finance Corporation in October, 1940. Kellett has a backlog of unfilled orders in excess of $4,000,000 in subcontracting work for prime airplane manufacturers.

Northrop Aircraft has negotiated a credit in the amount of $3,500,000 with the Chase bank and Manufacturers Trust Co. of New York. This credit is to provide any needed financing of inventory that may be necessary.

T.W.A. and the New Haven railroad have established a new airline corporation in which T.W.A. will have 55 percent control. The new company is expected to apply to the CAB for permission to operate a comprehensive network covering many New England cities.

Curtiss-Wright Corp. leads the aircraft concerns with defense orders outside the aviation field. One of the Wright engines is standard equipment on armored tanks and with the Administration planning to nearly triple the present tank program Curtiss-Wright will be called upon to power a large number of these juggernauts. **Continental Motors** also is a big supplier of tank engines under license from Curtiss-Wright.

United Aircraft Corp. has set up a special reserve account of $4,000,000 out of its nine months' operations to provide for the transformation from defense production to a peace-time economy. The company also has charged off around $11,000,000 for three buildings which were erected in 1939 to handle British and French contracts. The cost of these buildings is amortized as deliveries on these foreign orders are made and the company has another $5,000,000 for completely charging off these buildings during the life of the foreign contracts.

American Airlines took ten years to carry its first million passengers but in this year alone the company will haul its fourth million. This big traffic gain is being absorbed with less airplanes than the airline had in operation a year ago.

Republic Aviation shipped more combat planes in October than it did in the first six months of 1941, when deliveries totaled $2,892,000. The company's new $6,000,000 Long Island factory is now in operation.

Douglas Aircraft has just paid a $5 per share dividend to its stockholders, the same amount the company declared a year ago. Although earnings this year are running well ahead of the previous year, the unchanged dividend rate reflects the management's decision to follow a conservative dividend policy in view of the heavy working cash requirements of a rapidly expanding production program.

Consolidated Aircraft is delivering each month approximately the same dollar value of airplanes as it did in the first ten years of the company's existence. Major R. H. Fleet, president, believes that output will be expanded to the point where by next summer Consolidated will have as large a volume in a ten-day period as it had in its first decade.

Vultee Aircraft is not expected to declare dividends this year due to the management's desire to conserve cash resources at this time. For the nine months ended with August, deliveries amounted to about $18,000,000, as against $5,600,000 in all of last year. Another $18,000,000 in deliveries were expected to be made in the three months ended with November of this year.

Cessna Aircraft will report record earnings for the year ended September 30, 1941, according to well informed Wall Street quarters. Shipments in the final quarter are said to have totaled around $8,000,000, compared with only $431,000 in the entire previous fiscal year.

North American Aviation's 1941 purchases of outside labor and materials will amount to around $100,000,000, compared with $45,000,000 in 1940. Some 30 percent of current output is farmed out.

Here and There . . . Beech Aircraft deliveries in the 1941 fiscal year were 430 percent ahead of the previous year . . . Cessna is negotiating for the biggest order the company has ever received . . . Northrop's annual production is between $25,000,000 and $30,000,000 . . . Defense officials are talking of raising the goal of 500 four-engine bombers a month . . . United Air Lines reports its express business 60 percent higher that last year . . . Charles A. Miller, assistant traffic manager of Pan American Airways has been elected president of Airlines Terminal, Inc. . . . Boeing added 10,000 employees in less than ten weeks recently, bringing the total force to more than 21,000 . . . Payrolls in California aircraft and shipyard plants are expected to expand by 65,000 in the next six months.

By Raymond Hoadley

Aircraft companies, it might be noted, have stepped up their dividend payments this fall in a number of cases—usually a trustworthy indication of increased earning power. So far the defense boom has not proved as profitless for aviation as Wall Street has feared it would be and, incidentally, as it has proved to be for a growing number of other industries. As a matter of fact, 1941 earnings of the majority of companies, both large and small, will be at record levels despite higher costs, taxes and declining profit margins in the later months of the year. Big volume, efficient management and mechanization have more than offset the opposing factors. One large company is delivering the same dollar volume in airplanes each month it did in the first ten years of its existence. Six months hence this concern will ship that same volume every ten days! Another, through the use of a powered mechanized assembly line, has passed its employment peak although incoming orders and deliveries continue to rise. The airlines, like the manufacturing companies, have experienced a record breaking business this year but their earnings continue spotty. Some of the larger transport units are reporting larger profits for the fall months than they did last year. Most of the smaller airlines, on the other hand, are running slightly behind and the over-all picture for 1941 is one of higher revenues but lower profits.

Current Earnings Reports

Company	Period	Net Profits 1941	Net Profits 1940	Profits per share 1941	Profits per share 1940	Sales 1941	Sales 1940
Aero Supply	9 mos. Sept. 30	$504,866	$312,468	$1.19	$0.72	$5,442,467	$2,557,212
American Airlines	9 mos. Sept. 30	2,106,254	1,556,849	3.38	4.30	19,393,768	15,152,162
Borg Warner	9 mos. Sept. 30	6,350,930	4,125,231	2.72	1.76	.....	.....
Consolidated Aircraft	8 mos. Aug. 31	3,611,015	.....	5.57	....	52,648,549	.....
Continental Motors	9 mos. July 31	2,236,164	389,138	0.75	0.13	.....	.....
Douglas Aircraft	9 mos. Aug. 31	10,733,046	7,288,335	17.89	12.15	85,093,710	45,430,275
Fairchild Ltd.	12 mos. June 30	39,429	11,444	0.31	0.09	.....	.....
Northrop	12 mos. July 31	L 848,778	.....	....	....	3,327,379	.....
Square D. Co.	9 mos. Sept. 30	2,255,876	1,263,002	5.17	2.82	.....	.....
United Aircraft	9 mos. Sept. 30	10,771,732	10,461,127	4.05	3.93	203,435,155	79,023,797
Vega	6 mos. June 30	150,925	18,687	0.33	0.04	.....	.....

L — Net Loss.

Material Shortages

The sudden acute shortage in copper has taken the defense metal spotlight away from both aluminum and magnesium, temporarily at least. Fortunately, however, the aircraft industry will not be one of the many industries whose supplies of the red metal will be severely restricted or embargoed entirely after the first of the year. Therefore the main metal worries of the aircraft industry revolves around the amount of aluminum the United States and Great Britain will ship to Stalin, as well as the accelerating demands of the English for our magnesium.

Russia has asked England for a great amount of aluminum (we aren't allowed to give figures here) and Prime Minister Churchill has decided to give them all the metal they requested, according to defense officials. As England's supply of the white metal comes largely from Canada, the latter may have to shut down again on her exports to this country. Our Canadian aluminum imports have risen from zero in August to 4,000,000 pounds per month this past fall. Jesse Jones, Federal Loan Coordinator, had hoped to buy 200,000,000 pounds from our neighbor to the north in the next two years or so.

And in the case of magnesium, the increasing tempo of British air raids over Germany may readily call for larger supplies of American magnesium for bombs. An offset may be the fact that some British magnesium plants, damaged in last winter's blitz over the embattled isles, are understood to be back in production. Meanwhile, there were broad smiles in OPM early in November, when the word came through that Dow Chemical had started production in its latest new magnesium plant down in Texas.

As regards the domestic production picture in aluminum, 58,725,000 pounds were produced in October; 2,500,000 pounds by Reynolds Metals Company and the balance by the Aluminum Company of America. Three months ago total output hovered around the 50,000,000 mark. Ninety-five percent of the aluminum scrap collected in the pots and pans campaign last July was either in the hands of the smelters or in transit to them. The appeal to aluminum manufacturers for scrap also has caused monthly collections of this scrap material to jump from 900,000 pounds to 1,500,000 pounds, according to OPM authorities. Consequently, the scrap aluminum situation has improved materially in the last two months.

Thus it is that the supply of aluminum is adequate currently for all aircraft needs and there is enough magnesium for the most essential aviation needs for that lightest of all metals. But in the field of manufactured parts there are continuing "shortage" difficulties. A year ago there was much talk about the aircraft engine bottleneck. Engine production in November is estimated by military experts to have totaled between 4,500,000 and 5,000,000 horsepower. In fact, their output has outdistanced that of airframes and a new shortage in propellers has developed.

Here again there is every prospect of relief by spring. General Motors Corporation's Dayton propeller plant will be in full output by March and the Williamsport, Pa., plant of Aviation Corporation will come into production about the same time. The latter concern's new Toledo factory will be ready in about six months while Nash-Kelvinator will be turning out propellers in good numbers in the spring. The new Curtiss propeller plant at Beaver, Pa. also will start operation in the near future.

Industry Backlog

Defense orders of the aircraft manufacturers have passed the eight billion mark for the first time and now total approximately $8,343,000,000, up $400,000,000 in the past month despite record high deliveries. They are more than double the unfilled aircraft orders of a year ago and are sixteen times larger than they were three months after war was declared. At the same time the plant expansion program continues apace with the government allocating more than $60,000,000 for additional plant and equipment in the past month.

Military aircraft production has hit the half-way mark towards President Roosevelt's original goal of 50,000 planes a year. Output is now less than 10 percent below the production schedules set up a year ago and defense authorities expect the program will be up to schedule by the year-end.

Aircraft deliveries now amount to better than 2,000 planes a month. By the middle of 1942 they will accelerate to around 3,000 a month. The automobile industry will become an important factor in aircraft production for the first time early next year. The Buick division of General Motors Corp. is already in the initial production stages on its Pratt & Whitney engine order. Ford Motor Co. and Packard Motor Co. are turning out from three to six aircraft engines a month. Ford expects to step this up to forty a month by next summer and plans to have seventy-five big Consolidated bombers rolling off the assembly lines every thirty days by next fall. Studebaker schedules call for more than 500 engines a month by late spring and Nash-Kelvinator Corp. expects to be in mass production at about the same time. Fisher Body Co. is shipping bomber plane sections to North American Aviation. Meanwhile the aircraft industry itself has increased its output at a faster clip than has any other country at any time.

The following table gives the latest approximate backlogs of the defense aircraft producers:

Aviation Corp. ..	$26,000,000
Beech	85,000,000
Bell	140,000,000
Boeing	622,000,000
Brewster	92,000,000
Cessna	27,000,000
Consolidated	725,000,000
Continental Motors	26,000,000
Curtiss-Wright ..	995,000,000
Douglas	670,000,000
Fairchild	26,000,000
Ford	736,000,000
General Motors ..	720,000,000
Grumman	67,000,000
Jacobs	20,000,000
Lockheed	625,000,000
Martin	630,000,000
Nash	45,000,000
North American..	374,000,000
Northrop	75,000,000
Packard	200,000,000
Republic	130,000,000
Ryan	14,000,000
Studebaker	100,000,000
United Aircraft ..	445,000,000
Vultee	178,000,000
all others (vendors)	550,000,000
	$8,343,000,000

Jacobs At Pottstown

Jacobs Aircraft Engine Co. has broken ground for a new plant in Pottstown, Pa., which is estimated to cost $13,000,000. Structure will be new "blackout type", with no windows.

For past decade Jacobs has been a leading engine manufacturer in the 200-400 hp. range, and planes powered by Jacobs motors are in more than 26 countries throughout world.

Company, which was started at beginning of the depression —remember?—rapidly grew to be one of largest of engine producers; is now to go into production on Pratt & Whitney engines. For this the new plant, now building, is necessary. More than 3000 men are to be employed at the Pottstown factory.

Steadily mounting engine production of United Aircraft Corp. in its East Hartford plant was reflected in announcement that contracts have been awarded to Turner Construction Co. for two additional test buildings. Structures will measure 80x95 ft. each, house four 16-ft. production test cells. Work is now under way on two similar buildings, 122x70 ft. and 203.6x41 ft. respectively. Two others were completed last year—all designed by Albert Kahn, Inc.

Conveyor-belt assembly is rapidly invading the aircraft plants. Latest example is at Martin, where a conveyor is credited with halving man-hours on certain small sub-assemblies. The belt is used simultaneously for production of a number of assemblies involving drilling and riveting operations. An assemblyman at the head of the line loads the jigs, puts them on the belt. A drill-pressman picks them up, drills certain holes, and replaces them on the belt.

Substitution of wood for aluminum in both trainer and combat planes is being pushed, Congress was told by Army, Navy, and OPM officials, who urged increased appropriations for Agriculture Department's Forest Products Laboratory. The laboratory is engaged in developing wooden aeronautical materials.

With a backlog of $3,000,000 in trainer plane engine orders, and a net profit for the third quarter of the year of $57,554.35, Earl Herring, vice president and general manager, has announced receipt of a substantial order for Kinner engines from the Dutch East Indies. This is the first order for Kinner engines from this territory. The engines will be mounted in Ryan planes.

A NONSTOP RECORD of 1,700 miles for light planes was established by Mrs. Evelyn Burleson of Albany, Ore., when she flew her Taylorcraft, "Miss Liberty" from British Vancouver to Mexico in 16½ hours. She carried 300 lb. of extra gasoline.

Wright Brothers Lecture

Prof. Richard V. Southwell of Oxford University, England, will deliver the annual Wright Brothers Lecture for 1941 before the Institute of Aeronautical Sciences in New York on December 17. The subject of his lecture will be "New Pathways in Aeronautical Theory", which will be presented at Columbia University, the thirty-eighth anniversary of the first airplane flights made by the Wright Brothers at Kitty Hawk, N. C. The Wright Brothers Lecture has been presented by the Institute of the Aeronautical Sciences on December 17 each year since 1937.

Cessna Will Build "Car of the Air"

Cessna Aircraft Company announces it will produce after the war a "family car of the air," which will not resemble in appearance any airplane ever built; whose safety features will be far in advance of any "fool proof" planes yet produced; and the cost will be in the same price range as present day automobiles.

Operating cost of the plane, according to the announcement by Dwane Wallace, president of the Company, will be much less than that of cars in today's "low-price class."

Biggest Show On Earth

Plans for the annual Miami All-American Air Maneuvers got off to the earliest start in 14 years, with indications pointing to a bang-up 1942. Directors of the annual Miami "Aerolympics" forecast not only the biggest aerial show of all time but anticipate a large gathering of America's aviation fraternity in Miami during the three days of the meet scheduled for January 9, 10, and 11.

As the world's oldest annual air show, it offers a program including stunt aerialists, precision flying teams, air comedy acts, parachutists and a racing program that gives stock owners a chance to participate in America's No. 1 air show.

Mjr. Philip J. Roosevelt

Major Philip J. Roosevelt, who was Military Editor of AVIATION in 1916 and 1917, was drowned on November 8th near his home at Oyster Bay, Long Island. He left AVIATION to enter the Army Air Service in 1917 and was attached to the pursuit wing of the First Aviation Group in France. He served a year and a half overseas and won the French Croix de Guerre. When he died he was a member of the firm Roosevelt & Son, investment bankers, and a director of many corporations. He was an owner of several yachts, Commodore of the Seawanhaka - Corinthian Yacht Club, and President of the North American Yacht Racing Union.

CALLING NAMES

William A. Bohannon, tow-sign advertising service, has bought the wingless autogiro that first flew air mail on schedule between a Camden Airport (later, Philadelphia Municipal Airport) and the rooftop of Philadelphia Post Office for Eastern Air Lines.

Capt. H. H. Holloway, TWA Stratoliner pilot on the Los Angeles-Albuquerque Div., recently sighted 30 craters between Chevalon and Wild Cat Canyons. Edsel Ford and TWA are investigating to see if caverns underlie the area.

Wally Smith is made district manager at Honolulu for TWA.

R. G. Lochiel, treasurer and comptroller of Penn-Central, is elected first v.p. of the National Association of Cost Accountants.

James H. Baldridge of Pittsburgh is named personnel director of Penn-Central.

Orville Wright, now 70, who, at 10:35 am December 17, 1903, made the first power flight, walks about Washington unrecognized even by the big men in aviation.

Lt. Bob Kinhead, who about a year ago left United Air Lines to join the information staff of the Air Force, Washington, is now on leave as assistant to James Murray, Boeing representative in the Capital these many years.

Capt. Frank Miller, formerly of the public relations section of the Air Force, has been transferred to Wright Field.

Reynolds Metals Co. is donating a training plane to Richmond-Hopewell-Petersburg regional flying corps unit, approved as part of the Virginia Protective Force.

O. W. Tupper is appointed administrative assistant on the staff of **P. G. Johnson,** president of Boeing, rejoining the company after an absence of 12 years.

Charles A. Miller, asst. gen. traffic mgr. of Pan American, is elected president of Airlines Terminal, New York.

Maurice Roddy, aviation editor of the Chicago Times Syndicate, and v.p. of AWA, is named chairman of the National Committee on Aviation of the National Exchange Club.

Col. David N. W. Grant, Chief, Medical Division, Air Corps, is the first officer to be named to the newly created post of Air Surgeon. He will be a member of the staff of **Maj. Gen. H. H. Arnold** and will head a medical service to coordinate the medical activities of the Army Air Forces. He retains his post as Chief of the Medical Division, Air Corps.

Lt. Col. James B. Newman, Jr. is assigned to the Army Air Forces for service on the Air Staff in Washington. He has been district engineer at Wright Field and will act in an advisory capacity on engineering matters on the staff of **Maj. Gen. H. H. Arnold.**

Madam Frances Perkins visited the Boeing plant,—got first-hand information by crawling into jigs.

Asst. Secretary of Navy for Air Artemus L. Gates and **Rear Admiral A. L. Lyster** of British Royal Navy toured North American Aviation plant. **Col. Oscar Moscoco** of Bolivian Air Force also toured the plant.

Granville M. Greene is appointed asst. supervisor of fleet service for American Airlines. **Redmond J. Lyons** is made assistant to the supervisor of fleet service.

Lyman G. Hill becomes western manager of Technical Ply-Woods and **Allan P. Crawfurd** advertising manager.

H. P. Robertson takes over Hartford office of Jessop Steel Co. as district manager.

Frank A. Burnett is promoted to Indianapolis office of Ampco Metal, and **E. A. Svoboda,** formerly at Indianapolis, replaces **J. A. Morrison** at Cleveland.

Gregory Daymond and **Chesley Peterson** are first members of American Eagle Squadron to receive Distinguished Flying Cross.

E. N. Whitney, former chief dispatcher of Western Air Lines is made assistant to v.p. of operations, **C. N. James. Richard A. Dick,** asst. gen. traffic mgr., is named gen. traffic manager under **Thomas Wolfe,** v.p.-traffic.

John E. West, president of West-Marquis, is elected president of Southern California Chapter of N.A.A.

E. D. Starkweather becomes personnel director of Inglewood plant of North American Aviation, with **A. W. Hale** as his assistant.

L. T. Cohu, J. K. Northrop, G. H. Irving, M. W. Stephens, B. P. Lester, H. W. Cohu and **R. L. O'Brian** are reelected directors of Northrop Aircraft. **T. C. Coleman** and **G. L. Sterling, Jr.** are newly elected to the directorate.

O. B. Whitaker is promoted to marine sales manager of Sperry Gyroscope Co.; **Stanley Bedell** to export sales manager; **F. B. Vose** to aeronautical sales manager; **E. F. Lazar** to manager of Federal department; **Paul Fitzgerald** to asst. manager of Federal department.

R. W. Boise, Jr. heads new Boeing industrial engineering department.

Cecil Register, Eastern Air Lines assistant chief flight-steward, marked his 6,000th hour and 1,000,000th mile in the air.

Mrs. Evelyn Burleson of Albany, Ore., flies non-stop from Vancouver, B. C. to Tiajuana, Mexico, in 16¼ hrs. in a 1940 Taylorcraft with 65 hp. Lycoming engine.

John A. Steele, service engineer for Pan American, is temporarily assigned as operations manager of new Pan American Air Ferry Service.

Merle J. Oelke, chief staff photographer for American Airlines, is named publicity director of the line's southeastern division.

Mahlon Gregg is appointed manager of the Rochester office of the Contract Distribution Division of OPM.

Frank Wallace resigns as manager of the Aircraft Parts Division of Harvey Machine Co., L. A.

V. A. Leach, president of Leach Relay Co., L. A., was fatally injured in an automobile accident.

Harlan A. Messner is appointed sales engineer by Ohio Crankshaft Co. and heads the West Coast office for sales and service of Tocco induction equipment.

Prof. George J. Higgins is promoted to professor and director of the Department of Aeronautical Engineering of the University of Detroit.

Bruce R. Prentice is promoted to engineer, aeronautics equipment division of General Electric, and **Kenneth K. Bowman** to assistant engineer.

C. F. Bulotti Machinery Co. is named exclusive agent for Kent-Owens Milling Machines in the San Francisco territory.

Fred C. Wood is appointed manager of the air conditioning department of York Ice Machinery Corp.

Earl C. Maund is placed in the Chicago office of Manning, Maxwell & Moore, in a sales and engineering capacity.

Carter Glass III enlists in the Air Corps as aviation cadet.

Harold M. Lochrane joins Kaydon Engineering Corp., in charge of methods and standards.

C. Y. Neff, service manager of Hewitt's Aircraft Products Div., returns from England where he made extensive studies of aircraft bullet-sealing fuel tanks.

Harlan H. Newell is elected treasurer and a director of Cleveland Automatic Machine Co.

George J. Haislmaier is appointed sales manager of the Contract Products Div. of Young Radiator Co.

E. V. Clark of Hughes Aircraft is appointeed to National Panel of Arbitrators of American Arbitration Association.

James H. Baldridge is named personnel director of Pennsylvania-Central Airlines.

Feeder Feeler

Charging regular airline passenger rates for its service, State Airlines of Charlotte, N. C., a charter operator, is providing service between designated points on a nonscheduled basis. Even a 10 percent discount is given for round-trips between designated points.

Feeling that it has demonstrated the need for such service, and that scheduled airlines and the public have benefited by feeding hitherto untouched sources of traffic into the airlines and providing better connections between the airlines in the area, State Airlines is presenting an application to the CAB for certification to operate on a scheduled basis as a feeder and connecting line.

Air Defense Reserve

The West Virginia Board of Aeronautics is organizing pilots, certificated mechanics and airport personnel of its state into a "West Virginia Air Defense Reserve."

Patterned along the lines of similar organizations now in existence in other states, its purpose is to coordinate all private and nonscheduled flying activities in the state with the national defense program, to assist in combating subversive activities, to prevent violations of CAA and national defense regulations and to aid in procuring applicants for the air forces.

The plan provides a means for private and nonscheduled commercial pilots to contribute to the national defense. On the other hand, it offers an opportunity for private flyers to continue flying in the present emergency and also gives them a priority status whereby it will be easier to obtain airplane and engine parts. A comprehensive training program is contemplated and a temporary organization is being set up pending the establishment of the permanent reserve organization.

New Kansas City Airport

The City Council of Kansas City has moved to acquire 751 acres of land at Grandview, Mo., 35 minutes south of the downtown district, for the purpose of constructing an auxiliary field to relieve air traffic congestion at the existing municipal airport.

Tentative plans call for the construction of three 1000-foot runways at the start, although the master plan of the airport provides for 10 000-ft. runways, which would require taking up options on additional acreage.

One of the 2-passenger Bellancas used by State Airlines providing feeder and connecting services between points in the Carolinas.

Meanwhile, the $2,000,000 Fairfax Airport expansion project, adjacent to the new North American bomber assembly plant, is rapidly nearing completion. Part of the new construction is already in use by Army and Navy planes based at Fairfax.

FDR Favors DC To Rule Airport

President Roosevelt has indirectly intervened in the squabble between District of Columbia authorities and those of Virginia, over jurisdiction of the new Washington National Airport.

In a letter to Rep. Jack Nichols, D., of Oklahoma, who with Senator McCarran, D., Nevada, has legislation pending to give the District final control over the airport area, the President stated that he saw "many advantages" in giving the District such control. Observers believe the President's influence will settle the matter in favor of the District.

Uncertainty of jurisdiction is causing trouble for the management of the airlines and has prevented the serving of liquors in the terminal restaurant.

New Airport for Atlanta

The new Atlanta-Marietta airport, 14 mi. north of Atlanta, will soon be ready for use. January 1 has been announced as the approximate date of completion by Georgia Air Service, Atlanta concern which has leased commercial operations of the field.

Flyers have been confronted with the problem of traffic congestion at Atlanta's present municipal airport, but the new Atlanta-Marietta airport will provide adequate facilities of every type to relieve the congestion. Repair, overhaul and storage facilities will be offered by Georgia Air Service, which also operates an Air Corps Training School at Bennettsville, S. C. Cody Laird and Ralph Lockwood are the operators of the service.

The airport occupies a 563 acre tract and will have three runways, 500 ft. wide and 4,500 ft. long. Present plans call for later extension to 6,000 ft.

University of California won the championship trophy at the 1941 annual Pacific Coast Intercollegiate Air Meet, sponsored jointly by the Los Angeles Chamber of Commerce and the Interstate Aircraft & Engineering Corp., held on Los Angeles Airport, Nov. 8th. Interstate Cadet training planes were used by all contestants for events which included paper cutting, bomb dropping, and spot landing. Four-pilot teams were entered by University of California, University of Southern California, Stanford, and San Jose State College. A majority of contestants were graduates of the C.P.T.P.

Prep School for Cadets

To help meet the urgent demand for more Army Flying Cadets, the New York Y.M.C.A. Schools have announced a preparatory course for the Army Air Corp Flying Cadet educational examination to begin at the 5 West 63rd Street branch November 17.

The intensive course is designed to assist young men who lack two years of college work and must take a stiff educational exam in lieu thereof. Applications to the Army should be submitted and physical examinations undergone if possible before enrolling in the course.

The class meets Mondays, Wednesdays and Fridays from 6:30 to 9:30 p.m. and prepares for the examination to be held in February, 1942. Tuition for the course is $30.

It Doesn't Always Pay

A member of the Civil Aeronautics Board recently wrote to interested persons that the Board has to consider costs when passing on applications for new certificates and extensions of lines. He said there is a wide misconception that airlines are set up at their own expense and their own risk, without cost to the government. Air mail compensation is required to keep most airlines in operation, he wrote, and prospective benefits to the public must be weighed against prospective costs to the public.

Purchase of 54 acres of property adjacent to Los Angeles Metropolitan Airport by the Timm Aircraft Corp. will make possible a substantial expansion program to speed production of Timm plastic-plywood trainer and aircraft component parts of both plastic plywood and metal construction, being manufactured under sub-contract for other Southern California aircraft builders. Timm plans construction of a private landing runway and substantial extension of present factory buildings.

Air-Rail Hookup

Transcontinental and Western Air is in process of filing an application with CAB for a certificate to operate an airline between New York and Boston via New Haven and Worcester, Massachusetts. The company announces its intention to establish a new airline corporation in conjunction with the New York, New Haven, and Hartford Railroad Company. This proposed action has been approved by the U. S. District Court at New Haven. The new Company to be known as "TWA-New England, Inc." will be held by TWA with 55 percent of the stock, and it will be managed by the airline. The railroad and TWA plan to coordinate their facilities for service on combination tickets.

Minimum wage of 50 cents has been established for manufacture of so-called Class II aircraft parts and accessories done on government contracts; determination was made under the Walsh-Healey Act.

Recent Books

AIR BASE, *by Boone T. Guyton.* Published by Whittlesey House, McGraw-Hill Book Co., New York. 295 pages, $2.50.

This is one of the most interesting books about Navy flying that we have seen in a long time. The author is now test pilot for Vought-Sikorsky. After he left Pensacola a few years ago he was assigned to the North Island base at San Diego, where he spent four years when he was not at sea with the carriers. Then he went to France where he served the first six months of the present war testing navy planes.

In the Navy he flew in a dive bomber squadron and his book describes the life and activities involved in such work. There is a vast amount of informal, behind-the-scenes Navy talk which has not been previously told. The book will interest Navy men, as well as the thousands of young men today who hope to become Navy pilots.

MACHINE SHOP—THEORY AND PRACTICE, *by Albert Wagener and Harlan Arthur.* Published by D. Van Nostrand Co., New York. 306 pages. Paper bound, $1.60. Cloth bound, $2.28.

Written for beginners in machine shop work, this book devotes 19 chapters to all phases of such work. The page size is large, giving ample room for scores of excellent illustrations. The authors are with the Henry Ford Trade School and the Ford Apprentice School.

AIRCRAFT LAYOUT AND DETAIL DESIGN, *by Newton H. Anderson.* Published by McGraw-Hill Book Co., New York. 306 pages, $3.

The author is an engineer at the Douglas Aircraft Co. and has been cited as "one of the company's most experienced and highly skilled engineers." The book was written for two groups of men: those who already understand something of aircraft drafting and who want to prepare themselves for better jobs in layout and design work; and for men who are experienced in design or manufacture outside airplane work and who want to adapt their experience or training to aeronautical work.

The book covers three main subjects with which every good aircraft layout draftsman must be familiar: descriptive geometry, detail design, fitting analysis. Chapter headings are: requirements for a good layout, descriptive geometry for aircraft layout, airfoils, general design considerations, connections, fabrication methods, fundamental principles of fitting analysis, strength calculations for riveted and bolted joints, bending and torsional stresses, strength of struts and columns, design of thin web beams, and an Appendix containing useful tables.

Aircraft plants today are filled with young men who have managed to get their first job but who are searching desperately for ways in which they can climb the ladder to a better job in aviation. This practical book will be of help to all those eager to learn more about layout and detail design.

DYNAMIC METEOROLOGY. *By Bernhard Haurwitz.* Published by McGraw-Hill Book Co. 365 pages, $4.00.

Much of the progress of meteorology in recent years has been due to the application of the laws of thermodynamics and hydrodynamics to the study of the atmosphere and its motions. In this book is presented a concise treatment of the laws that operate in the atmosphere. It stresses those results of dynamic meteorology which are of importance to the practical forecaster.

Some preliminary training in general meteorology will facilitate study of the book and a good mathematical background is essential, although the mathematical technique has been kept as simple as possible. Recent advances which have led to airmass analysis, frontal and isentropic analysis and the wave theory of cyclones have been included.

"WE MADE A MISTAKE," *by Lucien Zacharoff.* Published by D. Appleton-Century, New York, 213 pages, $2.

This book is about Russia and the title is a quotation from Hitler who said: "We made a mistake about one thing—we did not know how gigantic the preparations of this opponent against Germany had been."

Zacharoff has written a heartening book because he reveals the thorough preparations Russia has been making for a number of years. Her collection of airplanes, tanks, mechanized equipment, warships and submarines, as well as the training of civilians for war duty make an impressive story. Most of us, who expected that Russia would be another pushover for Hitler's hoards, have had a constant series of surprises. This book tells why the Russians have done so well.

One of the most interesting parts of the book deals with guerilla troops, encirclement and how civilians have been trained for war work. The book is well written, many personal stories are interestingly told, and hundreds of facts and figures back up the author's contention that the seeds of Hitler's defeat have already been sown in Russia. It is also emphasized that U.S. airplanes and other combat equipment are badly needed.

Zacharoff is an associate editor of Aircraft Publications and has written articles for AVIATION and a number of leading newspapers.

AIR MAIL PAYMENT AND THE GOVERNMENT. *By F. A. Spencer.* Published by The Brookings Institution. 402 pages, $3.00.

The author of this book, unlike those of many similar works, has actively participated in the aviation industry for some years. He has conducted an authoritative analysis of problems in that area, so inadequately explored, where economic and administrative issues are closely intertwined—a field whose importance is increasing with the addition of more and more regulatory agencies in the federal government.

He has traced from the beginning the issues and problems encountered in determining the amounts of remuneration going to the airlines for carrying the mail, analyzing all the decisions of the Civil Aeronautics Board and predecessor agencies dealing with adjustment of air mail compensation. The text also includes a discussion of what has been the most vexing problem of rate regulation—that of the measuring rod for profits, commonly known as the rate base.

A PILOT'S METEOROLOGY. *By Charles Greham Halpine.* Published by D. Van Nostrand Company, Inc. 220 pages, $2.50.

Though dealing with a highly technical subject, this compact volume makes easy reading for the students and "just average pilots" who do not need to master professional meteorology. The author has sought to reduce to simple terms the basic truths and principles of meteorology, without the mathmatical formulas, complicated diagrams, advanced physics and differential equations, to the end that those who fly the airways for pleasure and business may be better and safer pilots.

The author is a retired Lieutenant Commander of the U.S. Navy, and is now a member of the staff of the Weems System of Navigation and Ground School Instructor at the University of Maryland.

(*More Books on page 196*)

FOR A COMPLETE, all-purpose method of making prints—and today the demand is for a service more versatile than blue-printing—the Ozalid Process offers a full line of sensitized materials and Whiteprint machines that combine exposure and dry development in one compact unit.

By using the Ozalid Process, you get—in a matter of seconds—positive-type whiteprints of engineering drawings or anything written, typewritten or drawn on reasonably translucent paper . . . prints that are true-to-scale, durable, and will not wrinkle or curl.

With this all-purpose process you get . . . SUCH STANDARD MATERIALS as papers producing black, blue or maroon lines on a white background . . . transparent materials including transparent papers, cloth and foils . . . SUCH SPECIALTIES as paper laminated on cloth . . . airmail weight paper . . . paper coated on both sides . . . opaque cloth . . . correctors for eradicating line detail . . . SUCH SERVICE as fast—economical—print making.

Ozalid whiteprints are made simply by placing the original on a piece of Ozalid sensitized material and feeding both into the machine. Exposure and dry development are combined in the machine to produce a finished print that is dry, ready for immediate use. Ozalid transparent duplicates are produced the same simple way.

Compare this quick, complete process with the indirect way of making blue prints which requires washing—fixing—drying and trimming. Eliminate unnecessary production tie-ups by installing an Ozalid machine. Write for illustrated literature today.

SPECIFY Ozalid WHITEPRINTS

OZALID PRODUCTS DIVISION
GENERAL ANILINE & FILM CORPORATION
JOHNSON CITY, N.Y.
Ozalid in Canada • HUGHES OWEN CO. LTD., Montreal

NECESSITY BROUGHT ABOUT BY WORLD WAR NUMBER 1 FURNISHES PROVING GROUND for NO-OX-ID

● After World War Number 1, NO-OX-ID Rust Preventive was used successfully for treating inside as well as outside of airplane engines for preservation in long time storage. After 15 years these engines were usable.

● NO-OX-ID "EEE" (Triple E) is the resulting product of constant research keeping pace with changing developments in engines.

● NO-OX-ID in its chemical structure and consistency has a proven record in aeronautics for use in maintenance and preservation. It is a well-known, accepted preservation material in industry and designed for specific purposes. Write for complete information.

DEARBORN CHEMICAL COMPANY

Dept. Q, 310 S. Michigan, Chicago

NO-OX-ID IRON-OX RUST The Original Rust Preventive

Mobile Shops

(*Continued from page 63*)

and observation squadrons. In order to supply these squadrons with complete airplanes and still have a reserve pool of ships on hand, it maintains an Air Park, comprising enough commissioned airplanes to fill the replacement needs of the four combat groups. When the supply in the pool begins to get low more ships are dispatched from the larger air depots located back in the zone of the interior.

Under many conditions of combat it is impossible for this mobile depot to carry on all types of maintenance. Under ideal conditions it can maintain the whole airplane including the engine and instruments. However in an extremely active battle, either on the offensive or defensive, the amount of work carried on is dictated by the situation. Governed by the fundamental rule of war that the objective is the ultimate goal at any cost, equipment is abandoned if time does not allow its repair. In the offensive under these conditions, damaged equipment that requires too much time to service on the spot, is shipped back to the maintenance depot in the zone of the interior to be repaired. In the defensive under these conditions it is left for the enemy, being destroyed whenever possible.

When the depot has been assigned to a certain area in which to operate, and it is obvious that it will be there for some time, it "digs in" and all of the mobile equipment is temporarily fixed in place with the portable hangars and shop buildings erected. Large lathes and other machines more easily operated in large areas, are placed on cement foundations erected on the spot. Cement floors are also laid and the equipment is taken out of the trucks and trailers and placed in the most efficient arrangement. Fields are leveled to make better airports and in general the base is made as permanent as possible. Here again the extent of the permanency is governed by the situation on hand and it is up to the judgment of the commanding officer to decide just how far they will go.

However it is not always possible to remain in one place for rather long periods of time, in fact they may have but a couple of weeks in which to operate. In this case the work is carried on right in the trucks, which are equipped to function much like a side show does when a circus is on the road. In this case the trucks form the main units of the base with temporary jacks, lifts, work stands and such equipment taken out when it is needed.

When a crash has been reported to the mobile depot group, a reconnaissance is made immediately to determine the extent of the damage and the accessibility of the airplane for repair. To facilitate making these observations as rapidly as possible, the unit has been furnished with numerous types of transportation ranging from motorcycles to Basic Combat type airplanes which fly over the scene of the wreck. When it is possible, equipment is transported by land, water or air to the damaged airplane along with the necessary men to do the repairing. If this is not practical, however, the ship is brought back to the mobile depot base and there serviced.

The Air Depot Group is commanded by a Colonel who has under him officers and enlisted men. Unlike the depots in the zone of the interior, no civil service personnel are employed. Included in the men assigned to the depot group are detachments from the Medical Corps, Ordnance Corps, Signal Corps, Quartermaster Corps, Chemical Warfare Service and the Corps of Engineers. These troops are necessary to carry out all of the auxiliary functions which assist the men from the Air Corps, which form the basis, in maintaining the airplanes. It is the number of troops from these assigned units that are varied to meet the situation prescribed by the section of the country in which the depot is going to operate. In numerous situations the Navy may be called upon to furnish transportation over water, or Marines to overcome resistance, any or all of which may be made an integral part of the Mobile Depot.

The unit is headed by a headquarters squadron. Under this come the repair squadrons and the supply squadrons, which, together with the normal component of assigned troops, totals 16 officers and 160 enlisted men, practically all of which have specialists' ratings. Included in the equipment is all of the necessary machinery to carry out maintenance work on the airplane, engine and instruments. This means welding and riveting apparatus, material for jigs, jacks, lifts, lathes, grinders, honers, instrument testing apparatus etc. Being prepared for large scale operations the mobile depot has as part of its assigned equipment such machines as a steam shovel, a steam roller, bulldozers, numerous heavy and light trucks, portable hangars, shops and warehouses, and six airplanes.

It is upon these units that the mechanical efficiency of the Air Corps is now resting. They are a fundamental unit of the fighting force designed to keep pace with the fast moving modern war, but above all to "Keep 'em Flying".

ROEBLING *Looks Ahead*

TO A SECOND CENTURY OF PIONEERING!

The past—despite its achievement—is *behind*. The opportunity to continue to grow, to further achieve, to serve industry in even greater measure, is *in the future*.

» » That is why Roebling—at the celebration of its 100th Anniversary—LOOKS AHEAD—looks ahead with confidence to new opportunities to Pioneer in Wire—new opportunities to develop the finest wire and wire products that aggressive research, unequalled experience, and the most modern of manufacturing facilities can make possible.

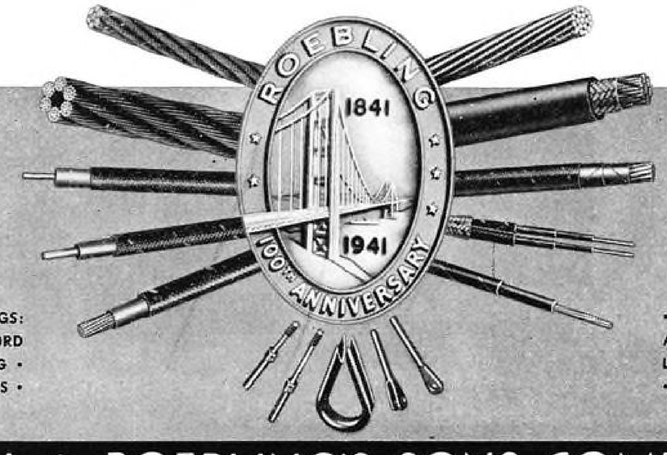

ROEBLING WIRE ROPE: FITTINGS: SLINGS • AIRCRAFT CONTROL CORD • STRAND • CONTROL CASING • SWAGED TERMINALS • THIMBLES •

• SERVING AND LOCKING WIRES • AIRCRAFT IGNITION, POWER AND LIGHTING CABLE • BALLOON CABLES • STEEL, COPPER AND BRASS WIRE

JOHN A. ROEBLING'S SONS COMPANY

TAKING AN ENGINE'S PULSE

HydrOILics HELPS TO "KEEP 'EM FLYING"

HydrOILics "takes the pulse" of airplanes on the ground for safety in the air.

Denison's HydrOILic test stand, the HSPT3, checks spark plugs at any voltage or pressure encountered in actual flight, and at an average rate of 30 seconds each!

Denison HydrOILic Spark Plug Test Stand (HSPT3)

DENISON EQUIPMENT for APPLIED HydrOILics

Operation of the HSPT3 is simple, fast, accurate. A plug is seated in an adapter, a HydrOILic cylinder clamps it into an airtight chamber, the pressure and voltage controls are set and the performance of the plug is recorded—that's all.

The tester develops air pressure up to 750 pounds per square inch *within 15 seconds*, and will maintain peak pressure for a full minute. Safety controls make it impossible for the operator to injure either hand in the clamping mechanism, or to handle the plugs while the electric circuit is completed.

HSPT3 is further evidence of HydrOILic's versatility . . . The highly flexible POWER, SPEED and CONTROL of HydrOILics has been adapted to scores of needs in industry and defense—and can be readily adapted to many more! To learn how much it can help *you*, phone your Denison representative, or write to us.

The DENISON ENGINEERING COMPANY
116 WEST CHESTNUT STREET
COLUMBUS OHIO

S.A.E. Maintenance

(Continued from page 113)

duction which has been made during the past year. Space in the display was sold out far in advance of the meeting and a great deal of effort had been devoted to the preparation of working exhibits which were arranged to demonstrate the functioning of hydraulic and electric units, Magnaflux testing, special tools and inspection equipment, the new Ryan ball and socket exhaust manifolding system, etc. Exhibitors included were: American Bosch Corp., ignition and electrical equipment; Bendix Aviation, Ltd., hydraulic and electrical parts and accessories; E. G. Budd Mfg. Co., welded stainless steel assemblies; The Cleveland Pneumatic Tool Co., hydraulic struts; Interstate Aircraft & Engineering Corp., hydraulic units and special accessories; Lamson & Sessions, screw products; Magnaflux Corp., magnaflux testing equipment; Menasco Manufacturing Company, hydraulic struts and parts; The National Screw and Manufacturing Company, screw products; Parker Appliance Company, aircraft plumbing; Purolator Products, special oil cleaners; Rohm & Haas, Plexiglas; Ryan Aeronautical Company, the patented Ryan ball and socket exhaust manifold system; Simmonds Aerocessories, aircraft accessories and electrical products; Solar Aircraft Company, stainless steel exhaust manifolds; Swedlow Aeroplastics Corp., plastic aircraft parts; Turco Products, Inc., special aviation cleaning compounds; and Wright Aeronautical Corp., a Wright Cyclone engine.

All four Pacific Coast Sections of the S.A.E. cooperated with the national S.A.E. organization under the personal supervision of Mac Short, chairman of the Southern California Section of the S.A.E., in staging this meeting. Robert Insley, Menasco Manufacturing Company, was general chairman of the meeting, and J. H. Kindelberger, North American Aviation, acted as chairman of the Aircraft Engineering Display. As usual, the closing event was a banquet and grand ball held on Saturday evening. Arrangements for this event were handled by Fred C. Patton, all tickets being sold out more than a week in advance. Session chairmen during the meeting included: H. H. MacMahon, chief engineer, Menasco Manufacturing Company; Gunnar Edenquist, sales engineer, Kinner Motors, Inc.; Henry J. E. Reid, N.A.C.A.; John K. Northrop, president Northrop Aircraft, Inc.; Mac Short, vice president, Vega Airplane Co.; Carl B. Squier, vice pres. Lockheed Aircraft Corp.; and Stanley A. Bell, chief engineer, Hughes Aircraft Co.

The importance of standardization to expansion of our production effort was emphasized by Pres. A. T. Colwell, in opening the meeting. Mac Short then introduced Jack Gray, Aeronautical Chamber of Commerce, who gave a heartening report on success of our production expansion effort, forecasting a total output for 1941 of more than 18,000 planes, as compared with only 2,400 in 1939, and about 6,000 in 1940.

One of the highlights of the meeting was presentation of the Wright Brothers Medal to C. L. Johnson, Lockheed Aircraft Corp. This medal is awarded annually to the S.A.E. member con-

Sam Breder, Equipment Sales Mgr. for Ryan, is shown at the Ryan booth.

Linde Customers

Draw On This Large Library Of Oxy-Acetylene Process Information

THE Linde organization has made available a large library of oxy-acetylene process information on which customers can draw freely. The material in this Linde Library is designed not only to add to the knowledge of welding and cutting operators, but also to suggest to designers, engineers, and production men many ways in which Linde methods can be used to do better or quicker production work where the use of metals is involved. In addition, much of this literature is provided to suggest means of lowering the costs of maintenance work.

The Library consists of handbooks, instruction outlines, reprints of engineering articles, design data, safety folders and even a monthly "how-to-do-it" periodical, OXY-ACETYLENE TIPS. Among the many subjects covered are: oxy-acetylene welding, flame-hardening, flame-priming, flame-gouging, shape-cutting, stack-cutting, and hard-facing.

If you want to know more about how Linde helps its customers use Linde oxygen, Prest-O-Lite acetylene, and Union Carbide effectively—get in touch with Linde today.

The words "Linde," "Prest-O-Lite," and "Union," are trade-marks of Units of Union Carbide and Carbon Corporation.

THE LINDE AIR PRODUCTS COMPANY
Unit of Union Carbide and Carbon Corporation
UCC
New York, Chicago, Birmingham, Kansas City,
San Francisco, and other Principal Cities
In Canada: Dominion Oxygen Company, Limited, Toronto

Now . . .

USED BY LEADING

AMERICAN

AIRCRAFT MAKERS

and the

BRITISH

AIR MINISTRY

SOSS

INVISIBLE

HINGES

THE value of the Soss Invisible Hinge is well recognized by leading American aircraft manufacturers, including North American, Curtiss, Glenn Martin, Stinson, Douglas and Boeing. This invisible hinge helps to streamline planes and permits flush, unbroken surfaces, both inside and out.

* * *

We can also make up special type hinges to meet your particular requirements and will be glad to work with your engineering department. Write to us and we will have our Sales Engineer call on you.

SOSS MANUFACTURING CO.
21785 HOOVER ROAD
DETROIT • MICHIGAN

Swedlow Aeroplastics Corp. had this exhibition of its products.

Turco Products presented a number of its specialized cleaning compounds for aviation purposes.

tributing the paper judged most valuable of the year to aircraft research; and was based on a paper presented by Johnson at the Detroit meeting in January, 1940.

Time is the biggest bottleneck of all, and morale is the hidden ingredient that will win the battle of production in defense of democracy, said T. P. Wright, OPM, in giving an account of our production position at the Friday evening session. Former vice president in charge of engineering for the Curtiss-Wright Corp., and now serving as chief aircraft production consultant to the OPM, Wright is the best qualified man in America to evaluate our present place in the production effort. His words were cheering. Acknowledging that there had been some cause for criticism a year ago, Wright outlined the progress made since that time and concluded that results were more than satisfactory. He stated that our rate of production expansion in the past year had exceeded anything done at any time either in Germany or England. For the future there is now every assurance that the difficulties still hindering aircraft production will have been surmounted before next summer, giving us a smooth flowing aircraft production schedule exceeding anything that would have been believed possible as recently as a year ago.

A detailed analysis of the development of Blitzkrieg tactics was given at this same session by A. T. Colwell, S.A.E. president, together with a formula for stopping Blitzkrieg. Colwell showed how the Germans have taken advantage of the internal combustion engine to develop a new technique in applying the same principles of warfare. This use of motorized armored equipment, both on the ground and in the air, has succeeded because it was opposed by old armies. Perfection of our production capacity to give equality of armament and mechanization to the forces opposing Hitler's panzer forces will stop this world threat.

Although war was the shadow which overhung the entire meeting and injected itself into most of the discussions, there was one paper which broke away completely from the military motif. This was the discussion by W. B. Stout of his work in perfecting a new type light airplane and engine, designed for the after-the-war market. A capacity crowd turned out to hear the inimitable "Bill" Stout and they were not disappointed. His presentation was as entertaining as it was educational. And the speaker was mobbed at the conclusion of his talk by inquisitive engineers who wanted to get their hands on the multi-piece crankshaft, centrifugally cast steel cylinder, and other engine parts which Stout had brought along for their examination.

While Stout did not claim that his work was yet assured of success, admitting that much testing and experimentation remained, yet there was in his report the feeling that a whole new field had been opened for expansion of lightplane design, as well as for the application of new engineering ideas both to airplane and engine development. Starting with an analysis of the light airplane for a mass market, Stout carried through step by step to the detailed description of his cantilever, high wing, two place airplane of stainless steel construction, with four wheel landing gear, and a 120 hp. engine of conventional four-cylinder flat arrangement, but of radical structural design.

In development of his airplane design Stout has worked with stainless steel with the thought that perfection of its application to a very small plane would make it easy to apply this material to larger designs where thicker sections can be employed. With a skin surface of only .006 thickness the wing skin is kept from wrinkling and "oil canning" by putting it under internal air pressure

AIRACOBRA BUILDS MILE-HIGH

RAMPART . . . IN TWO MINUTES FLAT!

Z-O-O-OM! In two minutes Bell's lightning-swift Airacobra is a mile in the air—ready to ward off hostile aircraft before they reach their goal.

Another Bell, too, is winning its service stripes in defense of democracy . . . the Bell Airacuda . . . a swift multiplace fighter designed for use with or against long-range bombers.

Many of these famous Bell ships now rolling off production lines are B. F. Goodrich equipped. They land safely and smoothly, thanks to B. F. Goodrich Silvertown Airplane Tires—the tires that are serving right now on many of our country's foremost fighting planes.

There are more than 50 B. F. Goodrich products now serving the aviation industry—on planes of all types. These include B. F. Goodrich Silvertown Airplane Tires, the safest airplane tires ever built . . . Expander Tube Brakes*, which make braking smooth . . . and famous B. F. Goodrich De-Icers, which make flying safer in all kinds of weather. For complete information about any of them, write, by airmail, to B. F. Goodrich Company, Aeronautical Division, Akron, Ohio.

* * *

**Goodrich Expander Tube Brakes are manufactured under license and sold by Hayes Industries, Inc., Jackson, Mich., and Bendix Aviation Corp., South Bend, Ind.*

LET'S GO! U.S.A. KEEP 'EM FLYING

Fly with

BF Goodrich

FIRST IN RUBBER

MAKERS OF TIRES • TAIL WHEELS • BULLET-SEALING FUEL TANKS • ABRASION SHOES
DE-ICERS • MATTING • RUBBER HOSE • GROMMETS • SHOCK ABSORBER CORD

ALL CLEAR

***Production* Gets This "Go-Ahead" Signal at *Doorways* When You**

Floor and wall space around doorways is *always* "all clear"—and *usable*—when you have Kinnear Rolling Doors. Even ceiling space remains unobstructed at all times, giving you maximum light from overhead sources, and permitting full advantages from conveyors or other overhead equipment.

Yes, and Kinnear's compact, upward, coiling operation clears the doorway from jamb to jamb . . . from sill to lintel. When open, Kinnear Rolling Doors are completely out of the way of all plant operations — safe from damage by wind or moving vehicles!

The tough, all-steel, interlocking-slat construction of Kinnear Rolling Doors gives you a lot of extra protection, too . . . repels fire; defies intrusion; resists wear, damage, and the elements.

Kinnear Rolling Doors are built in any size, for easy installation in old or new buildings. If desired, their smooth, time-saving operation can be stepped up to unbeatable efficiency by adding Kinnear Motor Operation, with push-button control from any number of points. Write for full information today!

The KINNEAR
MANUFACTURING COMPANY
1440-60 Fields Ave., Columbus, Ohio
OFFICES AND AGENTS IN ALL PRINCIPAL CITIES

provided by means of an air scoop. This practice adds materially to the structural strength of the wing, especially in torsion. To make satisfactory use of stainless steel material Stout found it necessary to make basic changes in the composition of the metal, resulting in a more ductile product. In order to do acceptable spot welding a research program was conducted with the result that successful welds are being made of .005 material to .040 thickness. This requires control of the time of weld to such a fine point that on some welds only 1/240th part of a cycle is used (60 cycle current).

Stout's new engine is designed around a novel crankshaft developed by Jules Dusevoir, in which the crank pins and crank arms are separate parts bolted together with the use of concentric semicircular serrations on the pin and crank arm joint faces. The result is a shaft which is more precise in final alignment, stronger and cheaper than the standard one-piece forged shaft. Stout believes that this crankshaft design will be found of advantage for shafts of all types and sizes. It permits of cheap production practices, a high degree of parts standardization, and the use of materials of varying qualities for the different shaft components.

Most important result of the use of this multi-piece shaft is that it permits use of a one-piece crankcase and one piece connecting rods, standard roller bearings throughout, and otherwise simplifies engine design and construction. Cylinder cost has been radically reduced through use of centrifugally cast steel cylinder barrels. The present engine weighs 120 lbs., develops 120 hp. and is relatively cheap to build. Stout admitted that the cost and weight of the engine accessories was still an unsolved problem but he hoped for progress on this point. A novel engineering feature of the new engine is provision of a two-speed gear drive to the propeller, permitting the engine to turn up 3600 rpm. on take-off to 2500 rpm. at the propeller shaft. When the propeller reaches its speed of 2500 rpm. the gear is automatically shifted into direct drive. This development will be watched with considerable interest. Together with new controllable pitch propellers recently developed for light aircraft it may well provide a remarkable extension in the present range of lightplane performance.

Production papers were interspersed liberally through the meeting and brought much new information to the attention of those in attendance. One of the most interesting papers was that on the new du Pont explosive rivet, prepared by L. A. Burrows and D. L. Lewis, Jr., and presented by Lewis. This rivet has been perfected, both in design and manufacture, to the point where all corrosion difficulties have been eliminated, tolerances in dimensions and explosive charge are being held to extremely close limits, and the strength of explosively riveted joints is closely comparable to joints with standard driven rivets. In Germany the explosive rivet is supplanting driven rivets to a considerable extent, partially due to the labor saving resulting from elimination of the bucker-up. Originally developed as a device to do blind riveting not possible by any other method, the over-all cost of driving the du Pont rivet has been brought to an average as low as 7 cents per rivet against 5 cents for the driven rivet, and there is some hope that this may be further reduced to make the explosive rivet directly competitive with driven rivets on a cost basis.

Of equal interest among production papers was the description of "Illustrated Production Breakdown" by George Tharratt, formerly with Douglas Aircraft Company and recently

Bendix Aviation Ltd. had this attractive display for visiting engineers to inspect.

The Finest that Money Can Buy

BONNEY TOOLS

A Time Saver for Assembly and Adjustments of Small Parts and Equipment

FOR production assembly work and service adjustments on instruments, carburetors, electrical and ignition apparatus, radios and other equipment where parts are small and space in which to work is limited, there is no finer set than the No. V55 Bonney Extra-Small Socket and Tool Set.

Every one of its 46 pieces has been selected because of its general usefulness and adaptability to the work for which it is designed. Each individual tool is made of the finest material obtainable for making that type of tool plus the fine workmanship that is characteristic of all Bonney Tools.

Contents include an assortment of Bonney 'CV' *Chrome-Vanadium* 1/4" square drive sockets with attachments, miniature box wrenches, miniature open end wrenches, small chisels, punches, screw drivers, hammers and miscellaneous tools.

To keep all pieces together, the entire set is furnished in a convenient, attractive, sturdy metal box which measures 11 1/8" x 6 1/8" x 1". Complete with metal box the set weighs only 4 lbs. 2 ozs. Write for your copy of catalog No. 41 today, on your company letterhead or telling us company associated with.

Contents of No. V55 BONNEY Socket & Tool Set

4—Hexagon Sockets with 3/16", 5/32", 1/4" and 5/32" openings
4—Double Hexagon Sockets with 3/16", 11/32", 3/8" and 7/16" openings
3—Double Square Sockets with 1/4", 5/16" and 3/8" openings
1—each 4 1/2" Sliding "T" Handle and 6" Extension
All above are for 1/4" square drive
2—Extra-Small Box Wrenches with 3/16" & 13/64" and 5/32" & 11/64" Hexagon openings
2—Extra-Small Box Wrenches with 1/4" & 3/32" and 5/16" & 11/32" Double Hexagon openings
9—Zenel Miniature Open End Wrenches with heads at 15° and 60° angles and openings from 13/64" to 1/2".
5—Zenel Miniature Open End Wrenches with openings from 3/16" to 13/64"
5—Assorted size Miniature Chisels and Punches
3—Assorted Screw Drivers
1—Channellock Ignition Plier
1—5" Tweezer
1—6" Handy Holding Tool
1—2 oz. Ball Pein Hammer
1—1 1/2 oz. Soft Face Hammer
1—5" Point File
1—Ignition Feeler Gauge

BONNEY FORGE & TOOL WORKS, Allentown, Pa.
In Canada—Gray-Bonney Tool Co., Ltd., Toronto
Export Office—38 Pearl Street, New York, N. Y.
Stocked by Leading Jobbers Everywhere

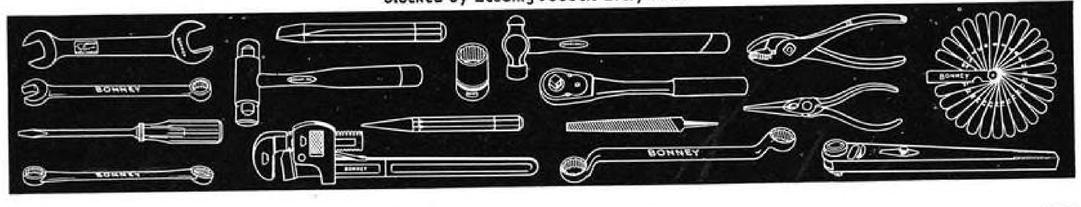

appointed Chief Engineer of Adel Precision Products Corp. Tharratt showed, by means of liberal use of slides and through a humorous off-the-cuff presentation, how substitution of perspective drawings and sketches for blueprints on the final production line has greatly simplified assembly problems and saved hundreds of engineering man hours in liaison work. Such drawings are now being widely applied, by many aircraft companies, to engineering and maintenance work as well as to production. One of the chief problems has been to find and train men who were properly qualified both as engineers and illustrators. This is now being solved through use of engineer-illustrators as lead men with each illustration group, using a staff of men who are selected from among commercial artists and art students.

Sweet music to the ears of aircraft men was the multi-authored paper on the lessons learned by the Briggs Mfg. Co. in getting into production on aircraft assemblies. Prepared by H. H. Budds, F. W. Hofman, E. E. Lundberg, H. T. Platz, and H. J. Roesch, all of the Briggs Mfg. Co., this paper was presented by Joseph Geschelin, editor of Automotive Industries. The authors freely admit that automobile men have learned much about quantity production of aircraft from the aircraft people, and still have much to learn. Much progress is being made in the development of high speed assembly methods. One explanation for any lack of cooperation which may have been charged against aircraft people is that their key personnel has been spread so thin by the tremendous expansion program of the past year that they simply do not have time for any problems but their own. One point where much can be accomplished is in the training of new workers in "attitude". This is interpreted as an effort to show each worker how important his job is, no matter how small it may seem to him, to the success of the complete effort.

Much progress in development of standardization was reported by C. E. Stryker, of the OPM. While there is still much to be done it was emphasized by the speaker that our production effort in the present crisis is so great and the need for maximum output now is so immediate that we must test all proposed standards by the maxim: "If it is not absolutely necessary that the standard be adopted then it is absolutely necessary that it not be adopted." Great strides are being made and loopholes in the standardization program are steadily being plugged. For example, the U. S. Army Air Corps uses more than 80 different sizes of airplane tires, whereas the Germans, with many more planes in service, use only 25 different sizes. Standardization is also as vital to successful maintenance in the field as it is to speed-up of manufacturing operations.

Establishment of engineering liaison groups as an aid to production control was outlined by Donald Kudlich, Wright Aeronautical Corp. Such liaison engineers free the project engineer for concentration on design work. By working more closely with production it is possible to make necessary changes in specifications "on the spot" and so materially speed production and catch troubles long before the final assembly stage, when delays would be more costly.

Airplane Quality Control, presented by J. W. Dunn, Curtiss-Wright Corp., explained how inspection methods can be streamlined to speed production, increase the proportion of salvaged parts, and maintain the quality of the product.

One of the most interesting papers in this group was on "Two-Speed Supercharger Drives," by F. M. Kincaid, Jr., Wright Aeronautical Corp. With the help of colored slides showing detailed cross-sections of the supercharger drives under consideration, Kincaid laid bare the secrets of two speed drives developed by the Wright company, Bristol and Rolls-Royce, in England, and Junkers and Mercedes-Benz, in Germany. While some of the foreign systems possess novel and interesting features, the American drives were shown to be equally rugged, much more compact, and of lighter weight, averaging only about one-half the weight of equivalent European drives. Development in this field has been rapid and satisfactory, but the recent perfection of two-stage superchargers, especially of the American turbo-supercharger, is threatening to supplant the two-speed drive, and in any case may be widely used to supplement the variable ratio drives.

In the field of research interest was largely concentrated on problems of high-altitude flight. The immediate military need to send our fighter and bomber planes into the thin air of the stratosphere has put such research work under the most intense pressure and results of the most far-reaching importance are already being attained. Illustrated with high-speed photographs of vapor formation in a tank operating under various conditions of temperature and altitude, a paper on "Fuel Feed at High Altitude" by W. H. Curtis and R. R. Curtis, Thompson Products, Inc., was presented by W. H. Curtis. This paper outlined the rapid progress that has been made in applying centrifugal pumps mounted directly in the fuel tank, as booster pumps to supply fuel to the regular engine pump under conditions that would normally produce vapor lock in the fuel lines.

"Icing Problems in Aircraft Engine Induction Systems" by L. B. Kimball, National Bureau of Standards, summarized the results of an extensive research program. Similar laboratory work by Pratt & Whitney Aircraft was told in the course of prepared discussion on the Kimball paper, presented by Victor J. Skoglund. While both authors admitted that much work remains to be done, there is now enough evidence at hand to justify the belief that complete solution of all icing problems is at hand.

Aircraft Carburetor Air Scoops and Their Effect on Fuel-Air Metering in Flight, was presented by F. C. Mock, Bendix Aviation Corp. This is a subject on which many may have thought that there was little to know and that had long since been learned. Actually, as the author pointed out, and demonstrated with moving pictures of air flow in various air scoops, very little is known on the subject. We know that certain scoops work satisfactorily, but we are just beginning to find out why. Each new design presents new problems which are still being solved by cut and try methods on the basis of flight tests. We still are not sure where the air scoop should be located, let alone just what form it should have. But the present research work is a long step in the direction of complete solution of this particular phase of design work.

An annual report on the progress of the C.F.R. Committee on its investigation of vapor lock problems was given by Dr. O. C. Bridgeman. The vast amount of research done by this committee is now proving invaluable as a reservoir of knowledge on which many industry engineers are drawing for a solution of some of their immediate difficulties.

Final paper of the meeting, entitled "Will Accessories Impede our Payload" was given by L. R. Hackney, Lockheed Aircraft Corp., who has been very active in organization of weight control work among aircraft engineers. While the title might indicate an attitude of antagonism towards the accessory people, the opposite is actually the case. Through cooperation among aircraft designers and accessory engineers much progress is being made on reduction of excess weight, and progress is being made in standardizing the evaluation of competing accessories, taking full account of qualities of performance, reliability, and serviceability as well as of weight. The paper provoked a very spirited discussion, illustrating the interest which exists in this subject. On the whole, the meetings were a decided success.

Today's
"Big Stick"
IS FIRE POWER IN THE SKY

A great American president described our defensive strength with the famous words "big stick". The words take on new meaning today as the world struggles for supremacy in the sky. Nowhere is there a single engine fighter to match the steel-shattering fire power of the U. S. Army Air Corps' cannon carrying Bell Airacobra. Just as important, the Airacobra is so designed that the 37 mm. cannon fires through the nose—for deadliest accuracy. Now in volume production, the Airacobra is the product of millions of dollars in research, and millions of man hours of devoted labor. Today's superiority of American aircraft speaks well for Tomorrow . . . in which Bell Aircraft's skill, foresight and advanced production facilities will play a leading part.

Making Aviation History

BELL AIRCRAFT CORPORATION
Bell Aircraft Ordnance Division
BUFFALO AND NIAGARA FALLS, N. Y.

Mass Maintenance Methods

(Continued from page 81)

We believe the most important factor in maintenance work is to appreciate the importance of good shop equipment, properly maintained. No amount of skill and ingenuity, or experience, can replace the proper tools needed to do a job. And no other qualities can make up for the failure to maintain tools in perfect order and cleanliness. We make cleanliness a fetish around our shops and hangars. Every item of equipment must be clean and in its place as though for dress inspection unless it is actually in use. There is no other way of making sure that the equipment will be available and in shape when needed. So far as possible we eliminate the practice of storing tools out of sight and tossed indiscriminately in drawers or boxes. We believe that polished tools neatly arranged on benches or tool boards do much to stimulate the morale of the individual mechanic and give the entire shop a degree of pride in its work.

To have pride in machines and equipment it is necessary first to have the equipment. There are very few short cuts to proper maintenance. The factories which build our planes, engines, and accessories are all splendidly supplied with special machines and equipment to do the job and so must we be if we are to maintain the planes and engines. We have gone right down the line and installed the finest hand tools, bench tools, shop machines, special parts stands and racks, aligning stands, special tools such as valve grinders and cylinder grinders, cleaning equipment, etc.

And we have provided clean, light, airy shops in which to use this equipment. Special attention has been given to workers' benches, outlets for water, air and electricity, and all other factors which combine to make a shop neat and efficient instead of cluttered and untidy.

Finally, there is no way to eliminate the need for properly trained men of the right type. We are fortunate in having a connection with the Curtiss-Wright Technical Institute. This has made it possible for us to obtain men whose qualifications and degree of training are particularly well known to us. Almost every man in our organization is a graduate of the Curtiss-Wright Technical Institute or has received special training to complete his educational background.

Our shops are separated by a distance of 50 miles, but we operate them as one organization. Plant No. 1 is located on Grand Central Air Terminal, Glendale, and does all types of maintenance work, airline, factory, private and military. We are doing an average of one complete engine overhaul job a day in this plant. Plant No. 2 is located at the Cal-Aero training center in Ontario, about 50 miles east of Glendale. Here we turn out an average of two complete engine overhaul jobs daily. Although we can interchange work to some extent between the two shops, most of the work at Ontario is on the training engines operated there, Lycoming R-630-11 model. We also handle airplane service and maintenance covering a total of 256 airplanes which are flying an average of 5 hrs. per day, for a total flying time of more than 1250 hrs. daily. Training planes are given a complete overhaul every 1,500 hrs. and training engines are overhauled every 540 hrs. We do a complete overhaul on the Lycoming engine in an average of about 106 man-hours.

We were fortunate in having operated Plant 1, at Glendale, for almost eight years before it became necessary to establish the Ontario maintenance base. By using the parent shop as a model we were able to lay out an ideal engine maintenance plant, putting into it all the features we had been wanting in the original base. Then we were able to select all our new men from the Curtiss-Wright Technical Institute and put them through a course of further training in Plant 1 before sending them out to work in the new maintenance shop, which was opened just this last June. In size the two shops are almost identical, each containing about 12,500 sq. ft. The Glendale shop is incorporated in a large hangar building and occupies an area measuring about 203 by 30 ft., plus office and storage rooms. At Ontario we erected a building with overall dimensions of about 210 by 125 ft. but in which the main overhaul shop was 210 by 31 ft. This arrangement gives us the straight-line flow of materials, as in a factory. The engine comes into the tear down department at one end of the shop, is disassembled, goes through the cleaning department, inspection department and then into the various individual shops before coming together at the assembly department at the far end of the line. The store room is located approximately opposite the center portion of the shop at both plants, making it most accessible for parts replacement work.

We act as distributors for Wright, Lycoming, Jacobs, and Menasco engines and parts, Holley carburetors and parts, Aero spark plugs, and as dealers for Pratt & Whitney and Continental engine parts, and Scintilla, Stromberg and Eclipse accessory parts, in addition to our service and maintenance work. Although our Ontario plant is now set up primarily for military work we can handle a wide range of commercial work on short notice. And at Glendale we are equipped to completely overhaul any engine from a 50 h.p. Lycoming to the Wright 3350 of 2,000 h.p.

We have made every effort to so systematize all work as to eliminate all possible overtime and every evidence of rush and hurry. We work on a straight 40 hr. week at Glendale and a 48 hr. week at Ontario, where training operations require a more intensive schedule. This is all day work. Although the airplane and engine routine maintenance is largely done at night in order to "Keep 'em Flying" we find that all engine overhaul work can best be done in the regular day shift. This is made possible by the fact that we have sufficient spare engines on hand to permit replacement of an engine for overhaul with one that has been overhauled, without loss of plane time.

Actual maintenance work at the two plants is done with relatively small but well-organized and highly-trained crews. At Glendale we have 30 men in the engine overhaul shop proper, and at Ontario there are 40 men in the engine shop. We have developed an organization over a period of years which makes it possible to maintain a very close control over all operations.

William "Bill" Clough is my direct assistant, supervising all purchasing and stores for all bases. Parts for all maintenance work are handled through him so that this important factor is concentrated at one point for ease of control.

At plant No. 2 all operations are in charge of Shop Sup't. H. J. Stewart, a Curtiss-Wright Tech. graduate of about 1929. At our Glendale plant we sub-divide the responsibility of the shop by having a shop Sup't., Harold Wolcott; Accessory Shop Sup't., Phil Oldberg; and with J. W. Horak in charge of hangars, engine test, and all of our servicing.

Airplane maintenance and servicing work at each base is done under the supervision of a maintenance chief. The Maintenance Chief at Ontario is Raymond M. Tonks, with four individual hangar chiefs, Glen O. Peterson, John Zauner, Harold E. Clements, and Nathan M. Hummer, under him. Each of these men has charge of all personnel in each hangar. Clarence B. Clark is maintenance chief at the Oxnard base, with Frank O. Behrman and C. N. Lamn as Hangar Chiefs. At Lancaster Harry J. Hemler is Maintenance Chief, with E. D. Masters as hangar chief.

Jim King operates as a technical inspector maintaining constant check on the condition of the airplanes and engines at all bases.

CURTISS HAWK, P-40, known to the British as the Tomahawk. This fast pursuit fighter, supplanting the P-36, also contains numerous parts which were machined from Synthane Bakelite-laminated.

CURTISS HAWK, P-36. Over forty Synthane parts were used in the Curtiss Electric Propeller alone, many more in the fuselage for holding "spaghetti", for cable guides, etc.

Ounce by Ounce, Curtiss-Wright Sheds Weight with Synthane

CURTISS GOVERNOR for starting the pitch control mechanism of a Curtiss Electric Propeller. Bushings and washers are made from Synthane.

EVERY ounce saved in aircraft construction means faster, farther flight or an opportunity for adding armor or armament. Wherever used, Synthane Bakelite-laminated, weighing only half as much as aluminum, shaves off vitally needed ounces. Synthane has more to recommend it than light weight. It is structurally strong, resists corrosion from water, aviation oils and gasoline. It is an excellent electrical insulator. And it is easy to machine, gaining valuable time in production. Synthane helps Curtiss-Wright and many others produce better planes faster.

SYNTHANE CORPORATION, OAKS, PA.

THE AVIATION INDUSTRY *OK's* SYNTHANE

Bakelite-laminated for

LIGHT WEIGHT with Structural Strength
LIGHT WEIGHT with Corrosion Resistance
LIGHT WEIGHT with High Dielectric Strength
LIGHT WEIGHT with Ease of Machining

SYNTHANE Bakelite—laminated

SYNTHANE TECHNICAL PLASTICS

SHEETS • RODS • TUBES • FABRICATED PARTS • SILENT STABILIZED GEAR MATERIAL

Materials to remember specify and use for aircraft parts

Pan American

(*Continued from page 51*)

To understand the problem presented to the international air transport system, one must bear in mind the basic dissimilarities between transoceanic and orthodox landplane operations. The sheer size of an 84,000 pound aircraft, of course, scales up all the basic elements of maintenance procedures. The four Wright engines are larger than other power plants in transport service. The instrumentation is extensive and elaborate. Control cable, electric circuits and fuel lines each run into the thousands of feet. Control surface dimensions sound like span specifications for the small land transports. Many processes, such as cleaning, which are minor items in the maintenance of smaller aircraft, become major tasks on planes which have 65 windows, 9,000 square feet of upholstery material, a floor area equal to that of an 8-room house and external surfaces of a third of an acre.

Every man working on the Clipper wears thin-soled "window-dresser shoes". This reduces tracked in dirt, and scratches on paint and metal.

Transoceanic flying boats operations also pose special maintenance problems not encountered in landplane work. Salt water greatly heightens exposure to corrosion. Long nonstop flight assignments increase exposure to wear and tear. To make sure that its "turn-around" method was adequate, Pan American Airways, drawing heavily on its experience in the Pacific and Caribbean, set up a procedure to perform as many as the 1500 items mentioned above, of inspection, maintenance and replacement, which must be completed before a Boeing-built Clipper is released for flight tests prior to a transoceanic crossing.

There are 24 steps to the top of the main work stands. Mechanics always slide down the bannisters (originally designed as fire-escapes) to save time.

There is no method of attack, despite the special problems presented above, by which the "quick turn-around" was achieved for Pan American's transoceanic Clippers which cannot, in some degree, be applied to any maintenance procedure. The emphasis, of course, is on personnel—in hiring and training.

Naturally, like every other airline, Pan American Airways makes the greatest effort possible to get the best type of personnel available. Expansion of activities by no means allows one to adopt a policy of loosening requirements demanded of a man who does highly technical work. Just because more work has to be done is no reason that it cannot be done just as well as when the organization was smaller and there was more time to do it. In our personnel problem we were fortunate in being able to rely on the excellent training being given in our aviation schools. The calibre of the men they have turned out, and are continuing to turn out, is gratifyingly high. Even with such a fine backlog of material, the factor of selection is important, nevertheless.

As regards training, this has been one of the most important items in Pan American's program of developing the "quick turn-around". Training cannot be overemphasized and in a program of this sort it is important to train and train, and train—and then when this has been accomplished, train them some more.

On the transatlantic service those men in charge of our training are, generally speaking, the most experienced men we have. Not all experts are good teachers but in our case we have been fortunate to have men who are senior in experience and able to train other men. Under this system, some of our most experienced men are therefore not doing productive work—productive in the sense that they are actually performing mechanical tasks themselves. However, the training program they are carrying out speaks for itself.

Along with the highly selective hiring and intensive training of personnel, an adequate staff of supervisors and inspectors was a third important item in the program. The nature of our business requires "check and double check" in every possible way and the importance of maintaining an adequate staff of men to perform this service cannot be overemphasized.

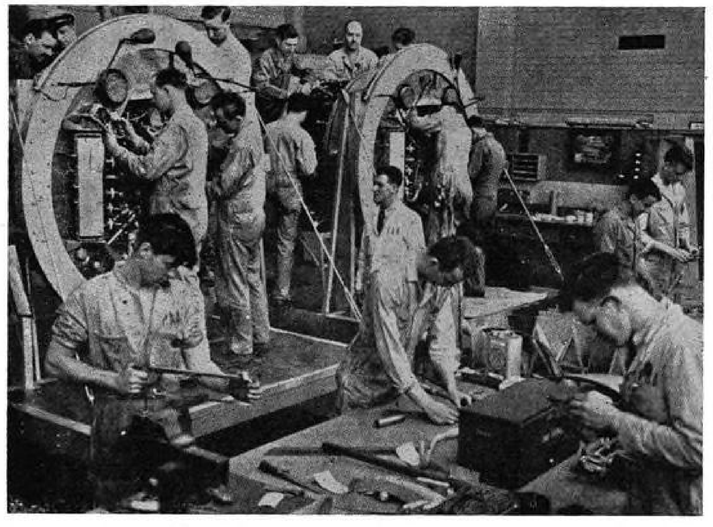

Power plants are worked on as complete units "in front of the fire wall". An engine change requires about 4 hours—about one hour to get the hoist up and take out the old engine, 2½ to put the new engine in, ½ to take the hoist down. Engines are 1800 hp. Wright Cyclones.

Make Your Taps LAST LONGER!

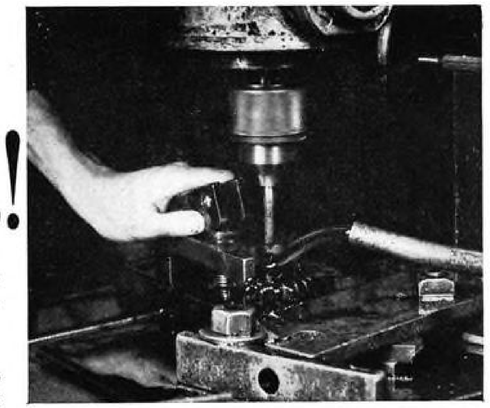

The right lubrication helps. It will give faster production, better size control and smoother threads, too. Here are a few tips.

First: Use plenty of lubricant. Put it where it will do the most good. Force it into the hole parallel with the axis of the tap if you can — use two streams on horizontal tapping. For deep tapping and finer pitches, use light or diluted oil to insure reaching the point of the tool. Be sure it's flowing when the tap starts to cut. This helps wash out the chips, too.

Second: Keep the lubricant clean. When it becomes dirty or gritty, replace it with new, clean lubricant.

Third: — and very important, different materials require different lubricants for most efficient tapping. Your oil company's lubrication engineer will give you specific advice, but here are some useful general hints.

This is one of a series of advertisements published by Greenfield Tap and Die Corporation to help users get greater production from their small tools in these critical times, through making useful facts more widely known

SUGGESTED TAPPING LUBRICANTS

Material Being Tapped	*Lubricant*
Allegheny Metal	Sulphur Base Oil
Aluminum	Kerosene & Lard Oil
Bakelite	Dry
Brass	Compound or Light Base Oil
Bronze	Compound or Light Base Oil
Bronze—Manganese	Light Base Oil
Copper	Light Base Oil
Die Castings—Aluminum.	Kerosene & Lard Oil
—Zinc	Compound
Duralumin	Compound or Kerosene & Lard Oil
Fiber	Dry
Iron—Cast	Dry or Compound
—Malleable	Compound or Sulphur Base Oil
Monel Metal	Sulphur Base Oil or Kerosene & Lard Oil
Nickel Silver	Sulphur Base Oil or Kerosene & Lard Oil
Rubber Hard	Dry
Steel Cast	Sulphur Base Oil
Steel Chromium	Sulphur Base Oil
Steel Machinery	Compound or Sulphur Base Oil or Kerosene & Paraffin
Steel Manganese	Compound or Sulphur Base Oil or Kerosene & Paraffin
Steel Molybdenum	Sulphur Base Oil
Steel Nickel	Sulphur Base Oil
Steel Stainless	Sulphur Base Oil
Steel Tool	Sulphur Base Oil or Kerosene & Lard Oil
Steel Tungsten	Sulphur Base Oil
Steel Vanadium	Sulphur Base Oil

GREENFIELD TAP AND DIE CORPORATION
GREENFIELD, MASSACHUSETTS
DETROIT PLANT: 2102 West Fort St.
WAREHOUSES in New York, Chicago and Los Angeles
In Canada:
GREENFIELD TAP AND DIE CORP. OF CANADA, LTD., GALT, ONT.

GTD GREENFIELD
TAPS · DIES · GAGES · TWIST DRILLS · REAMERS · SCREW PLATES · PIPE TOOLS

The development of every practical type of work equipment which would tend to eliminate the time-cost of a maintenance or inspection operation is another important item, followed throughout the entire Pan American Airways system. The company's interest in work equipment, particularly in completing elaborate workstands for the use of its maintenance crew, is as old as Pan American's use of large airplanes. As its airplanes grew larger and its experience longer, workstands have grown more and more elaborate. Today the big three-decked workstands that are wheeled beneath the wing of a B-314 within a few minutes after it has arrived in the hangar after an 8,000 mile round trip to Lisbon, are virtually complete work shops in themselves. The ones in use at LaGuardia Field, for instance, represent an investment of approximately $20,000 a pair. As the pressure for maintenance speed increased, these principal workstands have been supplemented by special inspection ladders which are used for working on the tail surfaces and other parts of the Clipper not reached by the main platforms. Hoisting apparatus, attached both to the hangar and to mobile units, is very complete. Several special dollies and trucks have been developed for special functions. Such elements as engine nacelles, wings, tail surfaces and hydrostabilizers, once detached from the plane, are handled in specially prepared jigs or service stands. Individual shops, such as metal working, engine overhaul and instrument and propeller laboratories have been furnished with every obtainable piece of usable equipment.

The creation and active use of spare and replacement parts is, naturally, a major item in the quick turnaround and is, of course, nothing new in the policy of saving turnaround time on a particular assignment by replacement of parts which need servicing with a new or preserviced element. At LaGuardia Field this policy has simply been carried further during the past two years than it ever had been carried previously. Originally applied to propellers, engines, accessories and instruments, it is now used in connection with practically all parts of the Clipper, such as elevators, ailerons, rudders, oil tanks, fuel and water tanks, and even hydrostabilizers (which cost some $20,000 apiece when purchased as spares). Even cabin upholstery, and furniture is frequently replaced and later serviced in comparative leisure in Pan American shops.



Every part must be weighed as it comes off and before it is put back on the Clipper.

Another spearhead in Pan American's "offensive against time" has consisted of the many measures to improve the organization and work efficiency of our man power. Of the total staff in the Pan American maintenance shops at La Guardia Field some 185 men will work directly on any Clipper undergoing the quick turnaround, the remainder of them being assigned to such general shops as Metal and Carpentry. The largest division in the overhaul department is Plane Service, with the Metal Working crew taking second place. In third place, ahead of Engine Service and the Instrument Department comes the Cleaning Crew. Almost without exception all such groups and service crews are organized on the permanent threeshift basis to permit continuous work throughout the 24-hours of the day and night when the Clipper is in port.

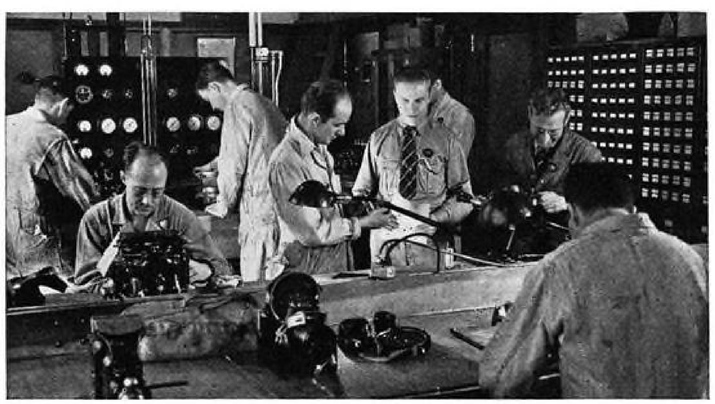

The accessory shop is as well equipped as an elaborate factory laboratory.

The quick turnaround actually starts immediately after the last passenger arriving at LaGuardia Field walks down the gangplank and the last piece of baggage, mail and express is unloaded. At that moment a group of maintenance inspectors board the Clipper to begin looking for special work that must be done. A group of instrument specialists also go aboard to gather up all removable parts of the ship's navigation equipment and a crew of mechanics lays down floor mats and covers all parts of the Clipper's cabin upholstery with material to protect them from soiling during the maintenance procedure. While this work is under way the Clipper is being towed from the dock to the ramp, brought up from the water on special cradles and immediately washed down to remove all traces of sea water and salt spray. Incidentally, time has been saved here, too, for the entire process of beaching this 42 ton aircraft and towing it to the hangar now requires only a little more than an hour, compared to an average of four or five hours necessary for the same process when we first started operations. Once within the hangar the huge workstands are moved into place, cleaning crews go aboard, service crews converge upon the parts assigned to their special attention and the process of quick turnaround is in full swing. Within six hours of the time the Clipper has settled on Bowery Bay every first inspection and every required work order has been completed and the work is well under way.

This process is speeded up materially by the fact that there are at least two Engineer Officers aboard every transoceanic Clipper. They keep constant watch over every part of the airplane and are able to gain access to the engines in flight by means of the engine stations behind each nacelle. Their minute observations and recordings, made available to the maintenance groups immediately upon the return of a Clipper, are partly responsible for the work orders flowing so quickly.

Within 48-hours the big Clipper should be ready once more to take to the air. Recently, to meet an extraordinary demand, the LaGuardia Field crew completed an entire turnaround process on a Clipper in only 17½ hours, a period only 12 percent of the time considered necessary a mere two years ago. No one in that crew would care to suggest any such interval as a normal assignment nor would they imply that bases elsewhere might be held to such a speedup. But no one in aviation today can say that tomorrow's problems may not make today's extraordinary achievements the commonplace of the future.

THERE'S no tougher test of engine performance than the long hard hours of cross-country pilot-training operation. In again choosing the rugged Franklin 90 H.P. to power Stinson Voyagers exclusively, Stinson engineers and the Army and Navy instructors who collaborate with them pay Franklin the highest compliment in their power.

Franklin will continue to prove its superiority by rewarding owners and operators of both private and training planes with smooth, economical, dependable power. Specify Franklin for the plane you fly or buy. Write us for specification sheets and performance data on the Franklin 90 with Electric Starter and Generator. Or see your Plane Distributor for details on the Franklin line . . . proven engines of 65, 75, 80, 90, 125 and 130 Horse Power.

Franklin
KEEPS 'EM FLYING

AIRCOOLED MOTORS CORPORATION ★ SYRACUSE, N.Y.

AMERICA'S aircraft plants are turning out ships for the defense of the Democracies. But it takes fifteen men to service, repair, and keep each ship in operation. Trained men are needed as never before to "KEEP 'EM FLYING." Unless we have these skilled specialists American Air Defense, the planes, and pilots will be helpless. Train now for the one assured industry of the future.

START IN AMERICA'S AIR GATEWAY

Embry-Riddle offers private students in technical, mechanical, craft and flight courses the same high standards which have made it one of America's greatest air training organizations—

Here, too, you'll enjoy South Florida's unequalled advantages of climate, healthful outdoor living and sports—the thrill of beginning your aviation career in the air gateway to Latin America, terminus of U. S. —Africa service, center of military, private and commercial aviation. Special Spanish & Portugese courses.

KEEP 'EM FLYING"

Embry-Riddle
SCHOOL OF AVIATION
3240 N. W. 27th AVENUE, MIAMI, FLORIDA

NAME_____
STREET_____
CITY_____ STATE_____

Riddle Aeronautical Institute, Carlstrom Field, Arcadia, Fla. — Riddle-McKay Aero College, Arcadia, Fla., Clewiston, Fla.

Contractors to U. S. Army Air Corps---Royal Air Force---Civil Aeronautics Administration

British Study U. S. Aircraft

(Continued from page 70)

ward the immediate problem of providing thoroughly trained R.A.F. ground crews as quickly as possible to service and repair American flying equipment now in active service with the British air forces.

Quite apart from this, but having a similar purpose, is a program under which a number of sergeant-instructors of the R.A.F. are taking special courses on particular aircraft. However, this is part of a long term program looking toward the adequate dissemination of knowledge regarding American equipment in the regular training of R.A.F. service men. These men will return to Britain to serve as instructors in schools for instructors.

Both of these programs together represent the efforts of the British to meet their half of a larger problem which America must also help to solve. Elsewhere in this issue, are described the steps taken by United States plane manufacturers abroad to assist British Authorities in maintaining their products at the utmost peak of efficiency. (See Bell servicing abroad, Fornoff, page 60, and Lockheed servicing abroad, Stunkel, page 58.)

There are so many radical differences between the two countries' methods of construction, measurements, standards for threads, nuts and bolts and consequently, tools, that confusion and delays in servicing and repair are inescapable unless every practicable provision is made to anticipate and overcome the innumerable discrepancies beforehand.

Most American service men who have actually had considerable experience in England or other British possessions agree that the larger proportion of spares, tools of all kinds, disposable materials and items such as rubber tubing, glass, nut plates, springs and so on now included in the British orders are urgently required.

It is certainly not meant as a reflection on British skilled workmen, but actually they have far fewer tools of all descriptions to go around. American machinists and mechanics, with very few exceptions, own very elaborate chests of tools of their own, usually a couple hundred dollars worth. Nearly every American male, whether doctor, lawyer, merchant, mechanic or clerk, has around his household or automobile varying collections of screwdrivers, pliers, hammers, wrenches and files. This is not so universally true in any other nation.

If the matter is not already under consideration, it might be wise for our lease-lend officials and the British purchasing people to study the advisability of instituting a large-scale program for supplying the British with quantities of standard hand tools for wide distribution in servicing squadrons and repair depots. This is particularly important in view of the vast quantities of American machinery of all kinds which will be in use with their armed services in the near future.

Some of the common tools and similar items for which an acute need frequently is experienced in servicing American flying equipment abroad are:

Open-end, box, crescent, monkey and pipe wrenches, all sizes
Phillips and Reed & Prince screw drivers for recessed head screws, all sizes
assorted screwdrivers, all sizes
adjustable pliers and wire cutters
drift punches
reamers
ball-peen hammers
special tools for standard fasteners
grease guns
Prestone and hydraulic fluids

The greatest caution must be exercised on both sides of the Atlantic to avoid future shortages of these and thousands of other similar items. "For want of a nail a kingdom was lost." So runs an old saying. Likewise, for want of a grommet or washer a 25-ton bomber might be kept on the ground.

There are numerous procedural delays in the order and shipment of corrective or changed parts or replacements. Some manufacturers feel that British agencies can do much to shorten the time now required for urgent replacement orders to reach them. It is also felt in some quarters that our export control unnecessarily complicates service replacements. They feel that blanket licenses should be issued American firms to ship abroad technical data, parts, tools and replacements for planes already purchased. But whatever the difficulties, certainly the appropriate agencies of both nations should take all necessary steps to reduce to a minimum the time required for all needed spares, replacements, parts and tools to reach the spot where they will do the most good.

The question of tools and supplies for American flying equipment is all-important in connection with the scheme for training R.A.F. service teams here, for all their knowledge of our equipment will be largely nullified if they do not have tools and equipment to keep our planes in the air.

A Permanent Place in the Industry

READING AERO BATTERIES

. . . Designed especially for aircraft use, are meeting every requirement for starting, radio, instruments, etc.

Ten years of modern laboratory research, in close co-operation with both plane and engine technicians, has placed READING BATTERIES "FIRST" in aircraft acceptance.

READING'S two most recent developments—Types 324 L.D. and 333 L.D.—are especially designed and constructed for light plane use; packed with power; built of only the finest materials obtainable—yet carry not a single ounce of excess weight.

If Reading doesn't have it—Reading will build it.

CONTRACTORS TO UNITED STATES GOVERNMENT AND PRINCIPAL AIRCRAFT MANUFACTURERS

READING BATTERIES, INC.
READING, PENNSYLVANIA • CABLE ADDRESS: "REBAT"

Northrop

(*Continued from page 83*)

iliary surfaces. Inherent stability has been obtained through development of the shape of the wing itself, and adequate maneuverability is provided by means of control surfaces incorporated directly in the wing.

Design of the Northrop type flying wing was initiated in 1923 and has progressed as opportunity afforded since that time. The pressure of designing and building conventional aircraft has prevented complete concentration on solution of the flying wing problem until recently. With formation of Northrop Aircraft, Inc., an accelerated program was initiated. It must be appreciated that many far-reaching factors are involved in the ultimate development of flying wing type planes. Not the least of these has been the perfection of "buried" engine installations with their problems of mounting, cooling, and driving through long shafts to remotely mounted propellers. Much work has been done along such lines by many people during recent years and all of this experience is applicable to the flying wing problem.

Also, the recent development of new airfoil sections of low drag and improved stability has had a profound influence on the further development of flying wing designs. Greatly increased experience in the field of spoilers, flaps, and various high lift devices has also helped materially in perfecting the flying wing plane.

Although the Northrop "All-wing" plane first flown in 1928 did make use of external control surfaces, carried on outrigger booms, it was quite radical for its time in the use made of high taper ratio, about 5 to 1, and high thickness ratio of the airfoil, about 33 percent. The fuselage was completely eliminated, the pilot being housed directly in the wing, the landing gear was retractable, and the engine was buried in the wing. In this early plane the extension shaft propeller drive was successfully demonstrated. Simplification of the airplane form to a simple wing and tail resulted in substantial elimination of parasite and interference drag. Efficiency of the high taper wing of thick airfoil section was also demonstrated. Concentration of the loads near the C.G. was proved advantageous both structurally and aerodynamically.

All of the experience gained through designing and testing this earlier Northrop flying wing, plus all of the knowledge available on this subject through trade literature, was incorporated in our development program on the new model. To this was added a very extensive wind tunnel program with model flying wing planes of a wide variety. At an early stage in the development the problems of design were discussed with Dr. Theodore von Karman, at that time Director of the Daniel Guggenheim School of Aeronautics at California Institute of Technology, and with his assistant, Dr. William R. Sears. Dr. von Karman is now employed by Northrop Aircraft as Aerodynamic Consultant, and Dr. Sears as Chief Aerodynamicist. W. J. Cerny, Assistant Chief of Design, has had the project under his direct supervision since its inception. The encouragement and assistance of these men, plus the enthusiastic collaboration of the Army Air Corps, has done much to accelerate development of the present successful all-wing plane. However, this project is in the nature of a flying mock-up.

We may, however, give a general description of the present plane, and some idea as to the effect it will have on airplane design. The original Northrop "all-wing" plane had a span of 30 ft. 6 in., length of 20 ft., height overall of 5 ft. Landing gear was of tricycle type with the main wheels forward and with a tread of 9 ft. Power was supplied by a single 90 h.p. Menasco.

In our present flying wing the figures are all given as approximate but will serve as a basis for comparison. Span is 38 ft., length 17 ft.

Landing gear is of tricycle type with the main wheels at the rear and a tread of 9 ft. Power for first test flights was provided by two 4-cylinder 65 h.p. Lycoming engines but these were later replaced by two 120 h.p. 6-cylinder Franklin engines.

Tests conducted to date have confirmed our engineering calculations. We expect a minimum improvement in all-around performance of about 25 percent as compared with conventional designs. And we believe that planes of this type can be built for as little as 60 to 70 percent of the cost of conventional planes of equivalent capacity.

Future of Flying Wing

It is probable that variations of the pure all-wing design will be developed with various bumps or excrescences incorporated to accommodate special loads, passenger cabins, gun turrets, etc. Such developments offer a wide range of possibilities without materially altering the basic characteristics of the plane. Also, various airfoils and airfoil thickness ratios may be used as design requirements dictate. An airplane of relatively slow speed can make use of thicker airfoils than a plane of higher speed and this factor indicates appreciable variations in the design. Limiting feature in application of various airfoils will be the compressibility factor. This is less of a handicap than with conventional planes due to the repression of all protuberances which normally contribute to local distortions of airflow to induce compressibility burbling.

Elimination of the fuselage and tail surfaces, and use of a very thick airfoil of high taper ratio greatly simplifies structural design. Not only is the structural arrangement efficient, resulting in savings of both cost and weight, but the added roominess makes it easier to install powerplants, accessories, plumbing, wiring, etc. Maintenance of the plane and its accessories is made easier and cheaper for the same reason.

Vision for the pilot from a plane of this type is quite good. Even on the small flying mock-up he has good vision forward and downward over the nose. Due to the marked sweepback of the leading edge and the sharp downward slope of the upper wing surface it is only necessary to elevate the pilot sufficiently to place his eyes a few inches above the wing surface to provide excellent vision. Of course his view is completely unobstructed in all directions in the upper hemisphere. On larger planes of this type the pilot's cockpit may be moved relatively farther forward if desired. As for the passengers in a plane of transport type, an arrangement can probably be worked out to give them direct forward vision, a feature now lacking in our conventional transports. Downward and sideward vision should also be good if the cabin is bulged down a little from the under wing surface, and provided with sloping side windows.

Stability of the "all-wing" type plane is a feature which cannot be discussed in detail at this time. However, it can be said that hundreds of flights have demonstrated the present design to be entirely normal as to both stability and control about all three axes. The peculiar conformation of the wing, with pronounced droop of the wing tips, is based on both engineering analysis and extensive wind-tunnel and full scale testing. Test flights have been made with the wing tips in all possible positions. The present arrangement has been demonstrated to be entirely satisfactory. Relation of wing dihedral, wing tip cathedral angle, and other features of stability and control are subject to variation with specific designs.

Control is achieved through use of a system of "elevons" and wing-tip rudders. The "elevons" serve, as in other tail-less type planes, both as elevators and ailerons. Rudder action is provided by control surfaces incorporated in the drooping wing tips.

Application of high lift devices to

(*Turn to page 202*)

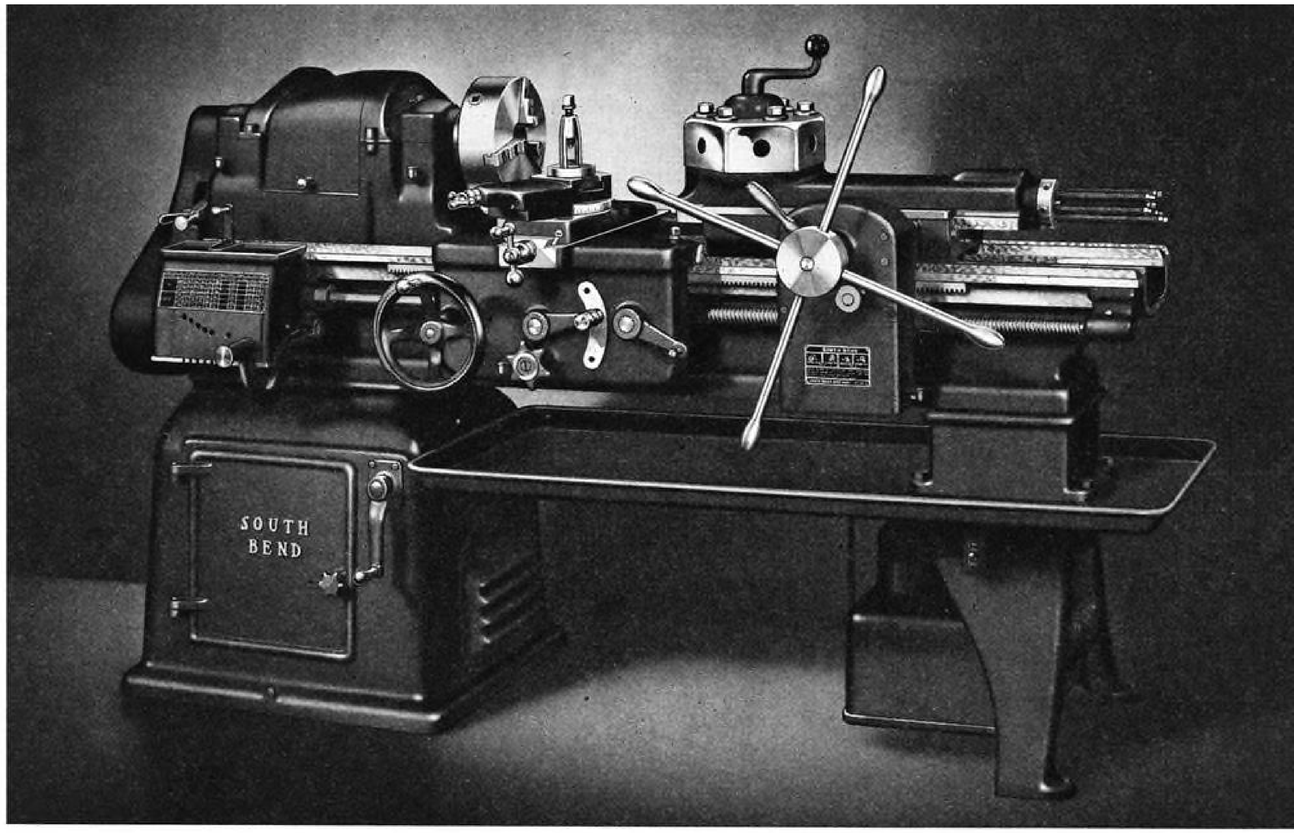

SOUTH BEND TURRET LATHES

For Rapid Production in the Defense Industries

THIS NEW South Bend 16″ Turret Lathe combines the precision and versatility of a toolroom lathe with the rapid production facilities of a turret lathe.

The power feed ram-type turret has six faces, with automatic indexing and individual stop for each face. The turret is mounted on the inside bed ways and may be clamped at any location the entire length of the bed.

The carriage has friction clutch drive for power cross feeds and power longitudinal feeds, also lead screw and split nut for cutting accurate screw threads. Mounted on the outer bed ways, the saddle wings clear the turret base to allow free movement of the carriage. Telescopic taper attachment, hand lever collet chuck and other attachments can be supplied.

The quick change gear box provides 48 changes for all carriage feeds and turret feeds. In addition, there is provision for changing the direction and speed of the turret feeds with relation to the carriage feeds.

The direct motor drive provides twelve spindle speeds ranging from 21 to 731 R. P. M. Headstock spindle has 1⅜″ capacity for bar stock. Rapid acting hand lever collet takes up to 1″ round stock.

In addition to this turret lathe we manufacture a complete line of back-geared screw cutting lathes, 9″ to 16″ swing, for toolroom and general shop use. Also 9″ and 10″ swing lathes with hand lever bed turret. Write for our catalog on this new lathe and the name of our nearest dealer.

TRADE MARK SOUTH BEND TWINS ENGINE LATHES

SOUTH BEND LATHE WORKS

Lathe Builders For 35 Years

751 East Madison Street · South Bend, Indiana, U. S. A.

LET'S GO! U.S.A. KEEP 'EM FLYING!

Edward Warner

(*Continued from page 49*)

the assault upon the enormous technical problems that it presents been so continuous, and engaged such an amount and quality of engineering and inventive talent, as to realize practical serviceability. The auxiliary supercharger, driven by an exhaust turbine, is already making it possible to conduct bombing expeditions at altitudes well above any that were previously attainable. It may rank with the development of heavy bombers among major American contributions to the aeronautical technology of this war.

In addition to the differences in development policy and in specialized national interest, there have been the differences between a nation at peace and one already at war. In time of peace, the military aircraft is commonly judged primarily as a flying-machine, and only secondarily as a fighting craft. In time of peace, the fitting of armor seemed an outrage against aeronautical science; but after the fall of 1939 it took only a few weeks of accumulating experience of the men who were actually being shot at in the air to convince designers that the weight of a little judiciously-distributed steel plate would be weight well expended, even though it increased the landing speed of the airplane by three miles an hour, or lengthened the take-off run by 100 ft.

There was, for example, the case of the leak-proof fuel tank. In 1919, with recent unhappy memories of aircraft coming down in flames, it was a general assumption that protection of the tank against ready loss or ignition of its contents by enemy fire was essential. Reasonably efficient means of leak-proofing the tanks were developed; but leak-proofing was heavy, and bulky, and sometimes shortlived. It gradually disappeared from the art, only to return when another war began to furnish tragic reminders that bullets still punctured unprotected tanks and drained the fuel away, sometimes with fire resulting.

To the problems of design and construction must be added those of getting the aircraft into service. At least three-quarters of such troubles as have been experienced with American aircraft in the British Service,—and there have been some troubles,—have been due to nothing inherent in the aircraft themselves, but have arisen out of the problem of fitting different types of equipment together, and of providing all of the information and all of the auxiliary supplies that were necessary for efficient use. Fortunately one may now speak of these difficulties primarily in a historical sense, for most of the troubles that were apparent six months ago have now either been entirely overcome or are well on the way to disappearance.

To realize the troubles that may be experienced in moving even the best of equipment from one environment to another, it must be remembered that a military airplane does not operate as an independent unit, but as a working part meshed into a vast and intricate system. Where British and American designs for auxiliary equipment differ, there must be a change of practice somewhere in order that the airplane and its consumable supplies may operate together. Bombs have to fit bomb-racks; ammunition has to fit guns; and guns to fit mounts. Changes in gun installation may involve a change in firing control running all the way to the pilot's cockpit. Radio sets must go into the space provided for them in the aircraft; but they must also have the frequencies and the other characteristics to enable them to work within the framework of the communications system established in the country where the aircraft is to be operated, the alternative being to make extensive revisions in the ground equipment.

Even the most trivial details can be annoying. Both British and American Services, for example, have a standard practice in the folding of maps for ready reference; but the practices are different enough to make it difficult to keep the standard maps of one country conveniently available in a map-case designed to hold those of the other. Other points have been far more important. There was a case, for example, in which the necessary changes in radio and other electrical equipment required a change in the characteristics of the generator driven by the engine. That in turn modified the engine's vibration characteristics, and it was only after a period of very urgent shop and laboratory work that means of overcoming the resultant mechanical difficulties were found and introduced.

Some differences require a period of familiarization for the pilot before he can feel at home with the new equipment. It appears to be true, for no particular reason, that the natural position of the control stick in level flight in most British aircraft is farther back towards the pilot's body than in similar American machines. A pilot accustomed to flying with his arm in a certain position finds any other position uncomfortable until he gets used to it. A more important matter is the habitual use of quite different types of brake control in the two countries; and there are others.

Aircraft can be moved from place to place at very high speed, but their lives in useful service may be short when they arrive unless a considerable supply of spare parts has kept pace with them. Not only is a stock of spare hardware needed, and tires, and engine and propeller parts and instruments and the like, but also special tools, and working-benches, and jigs for re-aligning wings and bodies after they have been damaged and distorted, and other special fixtures. Shortage of spares is often a grave handicap for aircraft that are operating within a few hundred miles of the factory where they were built. The handicap is vastly greater, and a proper organization is proportionately more difficult to work out, when the needs must be communicated in coded cables, and the needed material dispatched across an ocean. Even in the relatively simple and unmechanized days of our grandparents, there was current a sort of house-that-Jack-built jingle that worked up to a grand climax of how the battle was lost for the want of a horseshoe nail. Battles in the air may be lost for the want of lubricating oil of the precise specification on which the engines were designed to run; for the want of an adequate supply of exactly the right type of spark plugs; or for the want of the coils which will convert a radio set to enable it to operate on the proper frequencies.

Another difficulty often arising has been that of getting adequate instruction books and such material to all the places where they will be needed. The airplane often outruns or becomes separated from the information that ought always to be in the hands of those charged with operating and maintaining it. I dwell upon such seemingly small matters because, small as they seem, they are capable of making a vast amount of trouble, and have on occasion actually done so; and because of the satisfaction with which I can express my confidence that the problems of supply of material and of information, and of modification where necessary to fit a change in environment, and of accustoming personnel to the unfamiliar characteristics of the trans-Atlantic equipment, are all progressing towards more and more complete solutions.

Such problems are inherently those of the early stages of association. Arrangements for each new type of aircraft to be preceded by an account of its special qualities and operating demands, prepared from the point of view of the pilot, now insure that the first examples of the type to arrive will not be received as unproved strangers, but with the confidence that goes to the bearers of impeccable credentials.

The role of the service representatives of the American industry is of enormous importance in this work of familiarization, as well as in dealing with those mechanical troubles to which all highly-

Meets all specifications for a black oxide coating

JETAL, the original and outstanding blackening process, is a protective bath for ferrous metals—a simple chemical process applied quickly, easily, inexpensively to iron and steel parts of planes, engines, propellers, instruments. JETAL imparts a dense black surface coating—INTEGRAL WITH THE METAL—that not only protects against rust, salt spray and corrosion, but resists wear, abrasion and scoring, and substantially reduces the coefficient of friction between moving parts.

IMPORTANT TO THOSE WHO BUILD, MAINTAIN, AND PILOT MILITARY PLANES—JETAL'S characteristic jet-black color reduces visibility of steel propellers and exposed bright-metal fittings.

JETAL requires only a brief, simple immersion in a moderately heated bath. No elaborate equipment, no electric current, no special skills are needed.

JETAL—*1st* in Speed of production and Economy.

1st in Resistance to Rust, Abrasion, Scoring, Friction and Corrosion.

Write for test samples and consultation.
No obligation.

ALROSE CHEMICAL COMPANY

Providence, R. I. **Telephone Williams 3000**

stressed machinery is occasionally subject. There has been a growing appreciation that delicate and complex mechanical equipment, for its most efficient operation, needs occasional attention and operating counsel from engineers and mechanics who have known that equipment from its inception. The resultant attempt to keep the number of service representatives in England of the American industry commensurate with the rapidly growing amount of American equipment there is a recognition of one of the fundamental requirements of getting the most out of the aircraft and their engines and accessories. The guidance that American-trained experts can give is particularly important under the conditions of a country at war, with skilled labor never available in quantities to meet all the demands, and with every resource of manpower and womanpower, and every expedient for speedier training for mechanical jobs, necessarily pressed to the limit.

I have been dwelling particularly on military air material, but civil aviation is also of national importance, even in time of war. It has the importance that always attaches to the swiftest possible transportation of persons, goods, and communications in times of special emergency; but it also has the significance of an instrument of national policy in international relations, and of a vital instrument of military communications. For embattled Britain, air transport supplies communication and conveyance between areas of which the connection by surface means of transport is so slow and roundabout as to be virtually nonexistent. The pressure is so great that the would-be traveler by a British transport plane finds it necessary in many cases, and wise in almost all, to support his application with a government-issued certificate of priority. We have reached no such stringency as that, though we have approached it on the trans-Atlantic service; but we too are deeply dependent upon air transport in this crisis, at home, across both oceans, and for swift travel and exchange communications within the western hemisphere.

There has been an impressive manifestation of hemispheric unity in the steps that the American Republics have taken to uproot the ominously penetrating German-controlled lines.

It becomes increasingly important that the air transport systems within the United States, and those connecting us with neighboring countries and extending overseas, should operate during the emergency with a sole concern for the swiftest possible adaptation to national requirements, in the order of their urgency, and for the rendering of the greatest possible aggregate of service with the greatest economy of men and material. They operate under a legal framework drawn in terms of peace conditions. It provides for development primarily through the initiative of the individual airlines, with the agencies of Government giving their applications judicial consideration in accordance with an established judicial procedure, rather than for Government initiative and sponsorship of the establishment of services where the national interest requires them; but air transport, especially in the international field, has now to meet the test that is to become the universal touchstone of all our pursuits and professions. It has to be the expression of a national purpose that gives an unquestioned priority to the needs of the present emergency, and very little weight indeed to any considerations that do not coincide with the emergency's requirements. Considerations of competitive positions either for the present time or for the period after the war recede into comparative insignificance. Its success in the years immediately ahead will not be judged by ordinary standards, but by the accuracy with which it conforms to the emergency's demands and finds solutions for the emergency's abnormal problems.

Bell Abroad

(*Continued from page* 61)

afterthought to sales. The Bell Aircraft organization has pioneered in this respect by divorcing the sales and service departments and giving them coequal status.

Service, with related problems of maintenance, is integrated with all the productive processes from design to operation of the finished product. When the ideal design for a part or mechanism is produced, not only are production planning and operational engineers called in to study it from the standpoint of practicability of fabrication and assembly, but the service engineer as well, to pass on it from the standpoint of simplifying and minimizing servicing.

Likewise, if experience demonstrates an inherent disadvantage of a particular part or accessory, or its location, from a maintenance point of view, service men consult with the design engineers to determine if some modification cannot be made which will simplify maintenance or speed up servicing.

Always, one guiding principle dominates the thinking of Bell Aircraft engineers. No matter how fine their airplane, it is still worth less than the poorest aircraft so long as it has to remain on the ground. It can only be a *good* airplane while it is in the air or all set for the takeoff.

Since the time element is so important, particularly in the servicing of military aircraft, structural features and location of accessories and equipment rank with performance and efficiency of operation in the overall effectiveness of an airplane. A particular feature of the Airacobra's design which has proven its value in this respect is the method of wing attachment to the fuselage.

A single set of jacks is all that is necessary for erection or disassembly, eliminating the need for an overhead hoist of any kind. If a wing or landing gear must be replaced or repaired, no crane is needed. Only in removing or installing the engine is such a rig required. This greatly facilitates repair and replacement in the field.

Use of the tricycle landing gear has also been an aid to servicing, because the fuselage and wings remain in level position when the craft is on the ground. The fact that the airplane, itself, provides a level platform on which service men may work perhaps seems unimportant, but it is of great value, particularly in the field, where special work platforms are not available.

The great number of inspection plates, as well as the cowling plates, attached only by Dzus Fasteners, also aids during the servicing of the Airacobra. Availability of power plant control and fuel lines and accessory equipment is of paramount importance to a crew charged with keeping aircraft in operational shape, during wartime conditions especially.

The inescapable conclusion to be drawn from our experience is this: the responsibility of the plane manufacturer should not be regarded as ended when the planes and spares are delivered according to contracts. If the effectiveness of his product is to be fully realized, the far sighted manufacturer will voluntarily see to it that his product gets every chance to perform properly.

To see the wisdom of this course, we need only reverse the circumstances of the two nations. If we were waging a war and obtained British planes of quality and usefulness we would naturally try to utilize them. However, if for the lack of replacement parts, proper tools at the proper place, or trained mechanics to spare who could perform the work, we had to push them aside and do our utmost with familiar equipment, we would not be all to blame.

But—suppose there were an Englishman at hand or on call, ready and qualified to help us use it and tactfully showing us how to get the most out of it. You may be sure there would be small likelihood of it deteriorating in a shed or under a tree some place for lack of a cotter pin or a wiring diagram.

SEATING

A VITAL ELEMENT IN AIRCRAFT EFFICIENCY

Aluminum Craftsmen best interpret the seating specifications for today's modern ships . . .

Among the vital parts of today's modern plane is its seating accommodations for the pilot, the gunner, radio operator and observer. Every physical and mental fibre of these men must be alert, ready to instantly change the ship's course, its speed, altitude or firing position. Their efficiency is greatly dependent upon proper seating . . . seating that helps to build within them the reserve of acute responsiveness necessary for quick decision.

Aviation authorities have designed such seating, specifying that the structural material be aluminum. The world's largest builders of aluminum seating for business and industry, makes available the skill and craftsmanship of its organization for the translation of government specifications into comfortable, durable and adaptable chairs for the men who prove the superiority of American Aircraft.

THE GENERAL FIREPROOFING COMPANY

YOUNGSTOWN · OHIO

Laboratory Control

(*Continued from page 109*)

chemical treatments. This ensures their smooth, high quality and trouble free operation. Bronze bearings are analyzed for their copper, lead, and tin content. Oil sludge is tested to indicate the amount of piston wear. One device of particular interest used in the chemical laboratory is the electrophotometer. This employs an electric eye to look at colored solutions. By this means rapid chemical analyses are possible. New products are examined to find out their suitability and application to the manufacture of engines. Routine analyses of the alloys used in the details of the product are also part of the work done.

An etching laboratory uses various chemicals to treat the surface of metals thereby revealing the flowlines or bringing out defects such as cracks. Corrosion testing is done using a special temperature controlled salt-spray tank. This produces conditions which cause rapid corrosion in many materials. Various paints and treatments to prevent rusting may be tested with this apparatus.

With a heat-treating laboratory much can be learned about the hardenability of various metals. Two automatically controlled electric furnaces are utilized for this type of work. Research is carried out in this field and its application to production investigated.

Photoelastic Method Proves Worth

The photoelastic analysis being conducted at Ranger represents one of the most recent practical applications of this



Rockwell and Reflex Vickers hardness testing machines in physical laboratory.

method to airplane engine manufacture. Models of parts to be analyzed for stress are fashioned of transparent plastic, such as Bakelite. Circularly polarized light when transmitted through the model and focused on a ground glass screen presents a contour map of colored lines which reveal the principal stress differences.

An engine part which failed in service revealed no flaws in material or workmanship when analyzed by the usual methods. It was then sent to the photoelastic laboratory. An exact model was made. Stress patterns were observed and photographed revealing that the part broke where the tensile stress was 55 percent higher than at any other point. As a result the part was redesigned so as to remove this 55 percent of stress concentration—virtual insurance against any future failures from the same cause.

The Magnaflux Company's Stresscoat system is used in strain analysis. Parts or models to be studied are evenly coated with special lacquers. After this coating has hardened, the material under study is stressed to simulate actual loads. Small cracks in the lacquer begin to show up as the strain increases. The direction and spacing of the cracks disclose to the experienced operator much useful information concerning the part under scrutiny.

In the physical testing laboratory things are learned about metals that can only be found out by compressing, stretching and bending to the breaking point. A tensile testing machine can exert a compression or tension force from 100 to 60,000 lb., and produces the stress-strain diagram for the material under test. An Izod impact testing device determines just how resistant to impact are certain steels. Four high speed fatigue-testing machines, revolving at 10,000 r.p.m., determine the fatigue limits of various materials under different loadings.

(*Turn to page 192*)

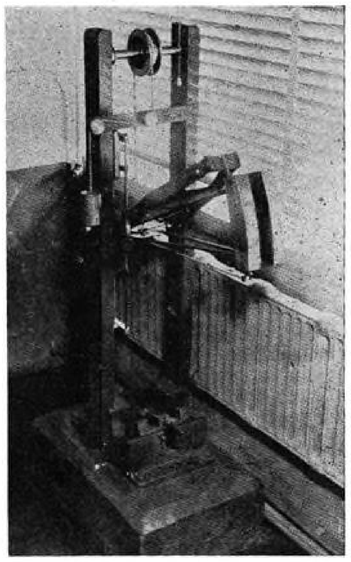

Izod impact testing machine.

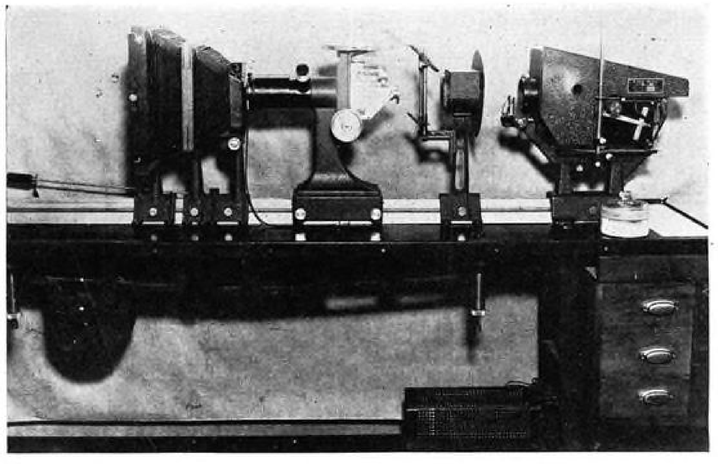

Micro laboratory metallurgical microscope.



Tensile testing machine with capacity from 100 to 60,000 lb.

SPECIFIED BY DOUGLAS FOR THE B-19 BOMBER

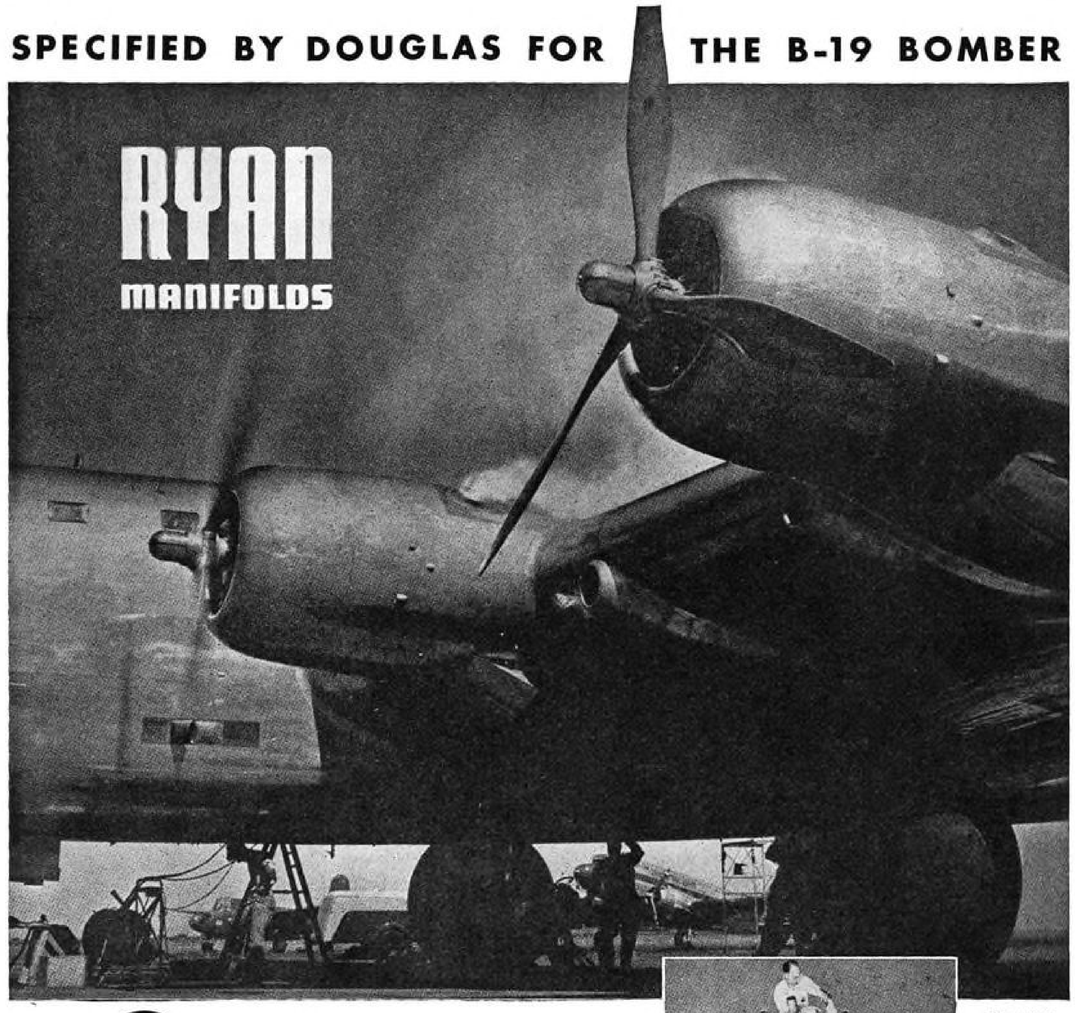



Kronquist Photo

Not the bones of a pre-historic monster but the various parts of a Ryan Universal Joint Manifold for the B-19

Ryan

TO PRODUCE exhaust manifolds that will hold the fire of 8,000 horse power on sustained military missions of 7,000 miles and more was just part of the assignment filled by Ryan in supplying collector rings for the Douglas B-19, "Guardian of a Hemisphere." Other engineering requirements dictated Universal Joint Manifolds, developed by Ryan over three years ago, and on which U.S. Patent No. 2,219,752 has been issued. Ryan feels honored in having been selected to develop the world's largest exhaust manifolds for the world's largest bomber. ¶ Your exhaust collector ring needs may not call for so huge an installation as on the B-19, still the problems involved may be even more intricate. If so, you too can benefit by Ryan engineering experience and production facilities. Ryan produces *all* types of exhaust manifolds to meet *any* requirement. We are producing at three times the volume of a year ago, and making deliveries in advance of customer's needs. Yet, recently expanded facilities assure capacity for a large additional volume of exhaust manifold business. Your and our engineers should get together.

RYAN AERONAUTICAL CO., LINDBERGH FIELD, SAN DIEGO, CALIF.

Builders of Famous Ryan S-T Trainers

AVIATION manufacturing speed-up without sacrifice of precision. For proper rolling contact of gear teeth in these magneto mounting drive gears, the correct backlash is maintained by Laminum shim. Simply *peels* for adjustment. Saves 30% and more in factory assembly or servicing time. Accuracy otherwise possible only by tedious, expensive methods! • *Shims (.002 or .003 in. thick laminations) cut to your order. Stock shim materials for repair and maintenance obtainable from mill supply dealers.*

Laminated Shim Company
INCORPORATED
80 Union St. Glenbrook, Conn.

Write for file-folder of shim application photos—and Laminum sample.

LAMINUM
TRADE MARK
THE SOLID SHIM THAT *peels* FOR ADJUSTMENT
1668

(Continued from page 190)

Two hardness testing machines, a Rockwell and a Vickers Reflex Tester, complete the equipment of the physical laboratory. The Reflex tester is possibly the only one of its kind in the United States and is particularly interesting because of its ability to measure the relative hardness of metals without leaving a serious flaw on the surface of the piece tested. A finely-ground diamond point is pressed against the metal. The resultant depression, hardly visible to the naked eye, is magnified powerfully and projected on a ground glass screen. The image cast on the screen is measured and from this measurement the true surface hardness of the metal can be determined with a high degree of accuracy.

X-ray Lab. to be Added

A description of the microscopic equipment completes the listing of the major installations in the laboratory. However, the laboratories are now being enlarged and part of the added space will be utilized for a new X-ray laboratory. This X-ray apparatus will enable the observer to see inside the various parts and find flaws which yield to no other method. Important information on strains and grain structure may also be gained using X-ray diffraction equipment.

Microscopic examination is particularly useful in studying the structure or "grain" of metals. By this means it is frequently possible to ascertain whether a failure or flaw was the result of a fault in the metal itself or due to external forces. A sample of the metal to be studied is first molded in Bakelite, then polished until it offers a plane surface, mirror smooth. It is placed before a powerful microscope, which can give any desired magnification up to 2000 diameters visually or photographically. Other equipment comprises a binocular microscope and a macrocamera. Another complete metallurgical microscope is on order.

The macro camera in the Ranger metallurgical laboratories is used to photograph flaws and fractures in bearings or other small parts at many times larger than life size.

The major purpose of the laboratories is absolute control of materials going into the fabrication of the engine. An equally important function is the study and investigation of all experimental and service failures to determine their cause and cure. But it is fully obvious that this persistent investigation and questing for better materials and methods of manufacture inevitably leads to developmental research—a by-product which pays big dividends when harnessed as it is at Ranger.

The by-products of research and experimental development can—and frequently do—determine the survival of those commercial organizations faced with the challenge of diminished and dislocated markets. In the admittedly difficult period which will follow close on the heels of the war's end, flexibility of method and elasticity of thought, coupled with a dynamic will to anticipate, even *create* new social wants and develop artificially retarded markets, will enable aviation producers, with few exceptions, to continue useful and productive activities within the structure ot the national economy.

Much will depend, however, on the extent of collective and cooperative effort on the part of the whole industry. While Ranger is by no means the only aviation concern utilizing the laboratory extensively, the account of its equipment and some of its accomplishments should give rise to serious speculation on the part of many aeronautical producers whose plants are not similarly equipped.

In the era of free markets regulated by supply and demand unmodified except by acts of God, management's thinking could terminate with the delivery of its product and collection of the stipulated fee therefor. No longer can responsible businesses operate in this fashion. Successful and enduring commercial concerns must integrate their organization and products with the social and economic environment, plan years ahead, anticipate every possible eventuality and be ready with a carefully thought out program for each and every transition or dislocation which conceivably might eventuate. In a highly technical and mechanized industry such as aviation, the laboratory is the logical nucleus around which wise planning for the future revolves.

SEE HOW CLEARLY GENERAL ELECTRIC RF FLUORESCENT LIGHTING HELPS YOU READ THIS SCALE . . .

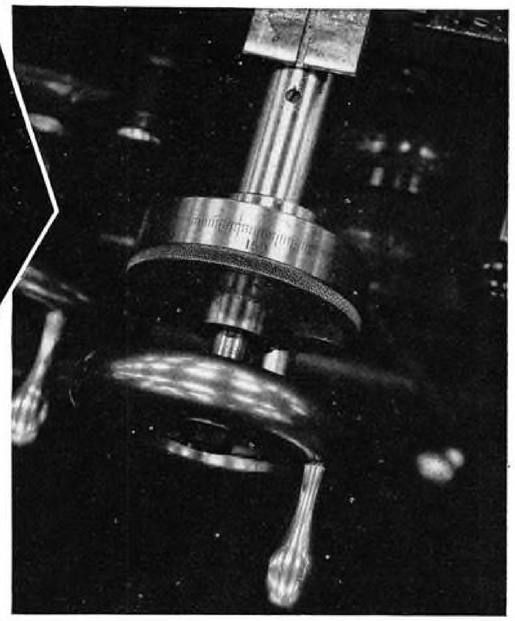

AT the Stinson Aircraft Company's Wayne, Mich., plant, General Electric's RF (rectified fluorescent) lamps provide 30 footcandles of "indoor daylight" to speed defense work. In this unretouched photo of the cross-feed dial on a typical lathe, note how clearly RF lighting reveals the markings, making them easy to read quickly and accurately.

The illustration below shows how this lighting produces little shadow and brings out every detail of the plane, including fuselage and wing construction.

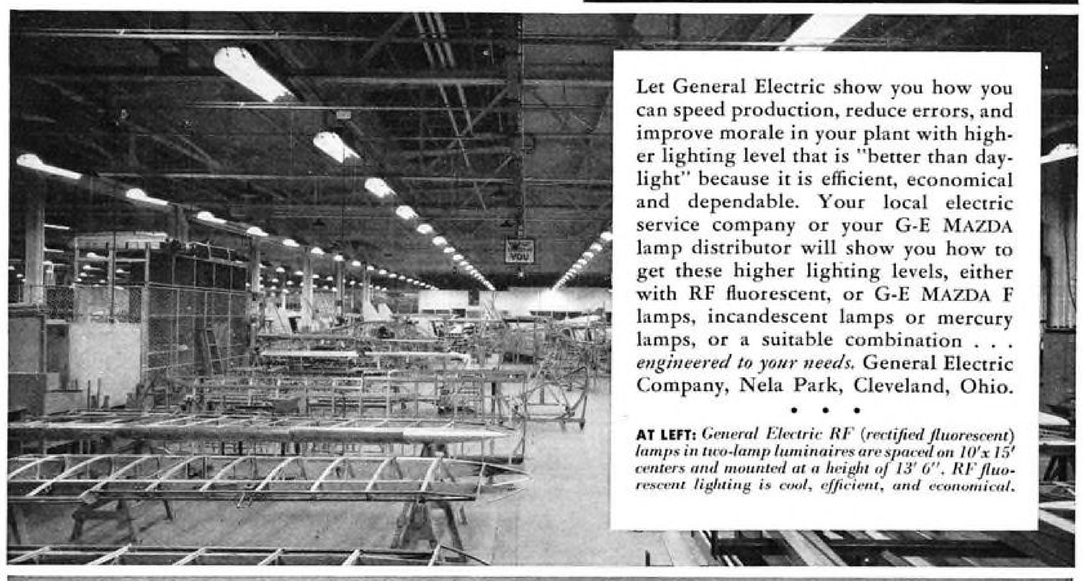

Let General Electric show you how you can speed production, reduce errors, and improve morale in your plant with higher lighting level that is "better than daylight" because it is efficient, economical and dependable. Your local electric service company or your G-E MAZDA lamp distributor will show you how to get these higher lighting levels, either with RF fluorescent, or G-E MAZDA F lamps, incandescent lamps or mercury lamps, or a suitable combination . . . *engineered to your needs.* General Electric Company, Nela Park, Cleveland, Ohio.

• • •

AT LEFT: *General Electric RF (rectified fluorescent) lamps in two-lamp luminaires are spaced on 10′ x 15′ centers and mounted at a height of 13′ 6″. RF fluorescent lighting is cool, efficient, and economical.*

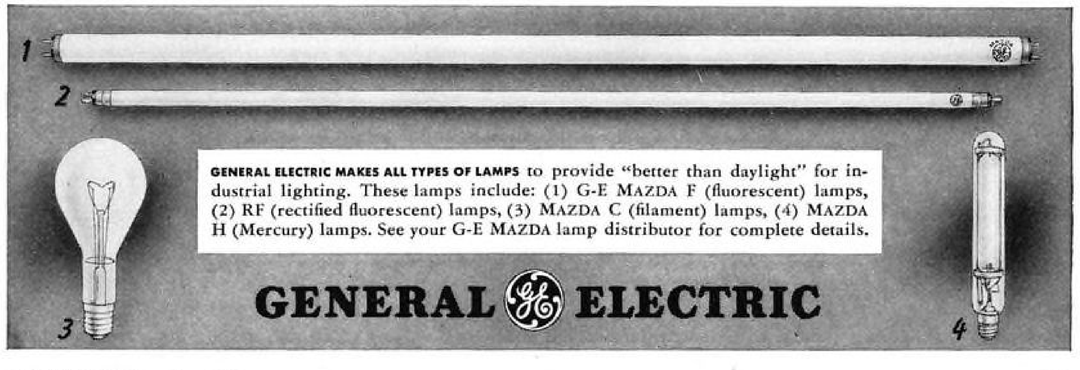

GENERAL ELECTRIC MAKES ALL TYPES OF LAMPS to provide "better than daylight" for industrial lighting. These lamps include: (1) G-E MAZDA F (fluorescent) lamps, (2) RF (rectified fluorescent) lamps, (3) MAZDA C (filament) lamps, (4) MAZDA H (Mercury) lamps. See your G-E MAZDA lamp distributor for complete details.

GENERAL ELECTRIC

SPECIFY
AMERIPOL* for
V-TYPE PACKINGS
ACCUMULATOR DIAPHRAGMS
RING PACKINGS
PISTON CUPS
AND ALL SEALING PARTS ON THE HYDRAULIC SYSTEM

Ameripol*, adapted by Miller's special formula, offers an improved sealing medium to the aviation industry. This new synthetic rubber retains its flexibility at sub-zero temperatures (−50°F.); has exceptionally low oil absorption; has very low friction; can be fabricated to close tolerances; and is resistant to heat, light, ozone, and non-corrosive to metals.

Write for new bulletin containing complete technical data on this modern synthetic. Experienced Miller engineers are always ready to work with you in designing longer-lived, more dependable sealing parts of Ameripol*.

*Registered Trade Mark of The B. F. Goodrich Company

IMPORTANT!
AMERIPOL* for defense production is available for immediate delivery.

MILLER RUBBER CO., INC.
AKRON, OHIO
(A Division of The B. F. Goodrich Company)
"Engineers in Rubber"

Servicing Canadian Kinners

(Continued from page 75)

blanketing or partial cowling of the barrels produced similar results. Warm air in front with cold air in the rear caused heavy condensation throughout the rear section, and this added further complications, such as rust in the timing gears, valve tappets, accessory drives, etc. Icing occurred in the induction system. Water froze on the oil screens, stopping the flow of oil.

A conventional cowl with louvers cut in the rear section to permit a flow of air around the entire engine is now standard equipment.

In a like way Canada has worked out a number of practices with respect to cold weather operation and servicing which have materially contributed to the ultimate efficiency.

The vital importance of proper warm-up was not fully recognized at first. Airplanes were left out in below-zero weather during the lunch hour and then taken into the air immediately without warm-up. The danger of this practice was realized when some of the engines froze up for lack of oil causing a forced landing shortly after take off. Today at all Canadian schools the lunch period is staggered so that an engine, once it has been placed in operation for the day, is never allowed to grow cold.

Canada has found that the oil system in an airplane engine is its most vulnerable spot in winter operations. Even where planes are wheeled from warm hangars and allowed to stand for only a few minutes the oil will congeal. Different viscosities of oil were experimented with to lessen this danger. Oils as light as SAE 15 were used, but it was found that with light oil the film broke down under the pressure, while too heavy oils were quick to congeal. In each instance the net effect was the same—the bearings got no oil.

A correspondingly wide range of experiments were carried on with respect to oil changes. Out of all this had come an eminently satisfactory standardization. SAE 40 oil is specified and oil is changed at 30-hour intervals. In addition, engines must be started immediately after planes are wheeled out of the hangars.

In the ultimate, Canada's experience sums up largely to this: once an engine has been warmed up so that the oil is circulating properly, the coldest weather makes little difference in its operation, but on the ground an airplane in Canada in winter demands entirely different attention than it does in California or Florida.

The application of this principle has produced far-reaching results. Engines operate under every conceivable condition—the sleet, snow and rain of winter, the dust and heat of summer—in meeting the gruelling demands of primary training. Yet, with weather's destructive influences surmounted and largely eliminated, they deliver a third more hours between overhauls and require far less servicing.

The Canadians may have done things the hard way. They might have had an easier time if they had established training schools in the milder regions of the United States. But you will find few of them who won't contend that the hard way was the best after all. The training continued in temperatures as low as 20 below and in two and a half months they flew 13,000 hours. The men who trained under these conditions were more than prepared for duties in Europe. They became veterans in flying conditions worse than anything Europe has to offer.

After a heavy rain, the field at Stanley, Nova Scotia, was so muddy that even a tractor (shown behind the oxen) was bogged down. A yoke of oxen was brought in to tow this trainer out of the mud. All operating conditions are not so difficult.

DEPEND ON ...
Douglas
DOUGLAS AIRCRAFT CO. INC., SANTA MONICA, CALIF. ★ El Segundo, Calif. ★ Long Beach, Calif. ★ Tulsa, Okla.

Two "Short-Cuts" That Speed Defense!

For the total defense of America, the best is none too good, and we must make haste while the sun still shines. Here are two "short-cuts" to speed the program.

PENCO "3-Shift" Tool Stand
All-welded Steel Construction

Keep tools right on the job twenty-four hours a day. Each of the three drawers locks separately—a single drawer for each shift. Cuts tool losses. Amazing time-saver!



Penn-Kelsey Wardrobe-Locker
60" Wide — Accommodations for 10

Occupies half the floor space ordinarily required. This extra floor space can be used for productive purposes.

Ten private, locked compartments, wooden seat and perforated metal shoe rack. Minimum initial cost per person.

Write for details and prices.

1869 Penco FOR PERMANENCE

Penn Metal Corporation of Penna.

In Business Continuously Since 1869

32 Oregon Avenue, Philadelphia, Pa.

Mc ks

War V *vid C. Cooke.* Published b J. McBride & Co. 218 pages, i $2.75.

This bc r popular consumption. It is prof llustrated and the text provides a ning commentary to the captioned p ographs. There is a fairly complete coverage of all military and naval types of aircraft of the American and British fighting forces. However, because of the rapid pace of development of military planes under wartime exigencies and the considerable number of new designs recently announced, the book does not include mention of some of the most interesting new military and naval aircraft. The captions are well written, pointing out interesting mechanical and aerodynamic features of the various types.

Flight: Aircraft Engines, A General Survey of Fundametals of Aviation, *by Ray F. Kuns.* Published by American Technical Society, Chicago, Ill. 363 pages.

For a readable, easily understood book on aviation engines, written somewhat in the style of the *Book of Knowledge* sets, the beginner will find this volume of definite value. The material, while condensed, is not so packed with technical verbiage as to mystify, nor so general as to be impractical. A further aid are the numerous diagrams, drawings and cutaway photographs illustrating points made in the text; and, as has often been pointed out, a good picture is worth ten thousand words.

Effective Foremanship. *Edited by Harold B. Maynard.* Published by McGraw-Hill Book Co. 263 pages, $2.50.

This work is the result of collaboration of fifteen experts on various phases of effective foremanship practice. It is thoroughly practical, yet fundamental principles underlying the methods of dealing with everyday problems of the foreman are carefully explained. It should prove equally valuable to the foreman who is just assuming his new responsibilities or to the experienced foreman who wants to improve his abilities.

Maynard is president of the Methods Engineering Council, Pittsburgh, Pa. The fourteen collaborators are men of widely varying talents, but all are recognized leaders in their respective fields of management, industrial engineering, education, plant layout, and so on. Throughout the text, actual examples illustrating the application of principles are utilized to enable the reader to quickly grasp and apply the suggestions and ideas under discussion.

Industrial Accident Prevention, *by H. W. Heinrich.* McGraw-Hill Book Co., New York. 448 pages, $3.

The author is assistant superintendent of the engineering and inspection division of the Travelers Insurance Co. This is the second edition of his book, revised from the 1931 edition. The first edition was the standard work on accident prevention, and it is expected that this new edition will likewise gain wide acceptance in industry. It is pertinent to the aviation industry at this time because many plants have recently become large enough to see a need for safety education.

Aircraft Recognition, *by R. A. Saville-Sneath.* Published by Penguin Books, Harmondsworth, Middlesex, England, 174 pages.

Now that this country has aroused itself to the point of plucking speculatively at the curly beard of Mars, it would perhaps be just as well if we got down to the business of learning aircraft spotting. It may not be long, now, when a practical education in this subject will prove right handy.

For this purpose we could hardly do better than to begin our studies with this small pocket manual, the pages of which are packed with the practical information needed.

The first six chapters are devoted to familiarizing the student with various parts of airplanes in order that we may know where to look for certain distinctive points by which airplanes may be recognized. In the second part of the booklet, silhouettes and descriptive notes are given of the various aircraft now in service abroad, all of which, however, are not included.

A glossary of descriptive terms in the back will prove helpful in explaining terms like "aspect ratio" and "slab-sided" as applied to aircraft.

Aviation Insurance Manual. Published by Aero Insurance Underwriters. Pocket size.

This is believed to be the first Manual ever published in connection with aviation insurance. It is a compact pocket-size booklet containing essential information for handling aviation coverages.

The Manual is divided into five different colored sections and is well indexed. A unique feature is a section containing a complete list of aircraft models and their present day prices.

SPECIAL TO YOU . . . Standard to Us

No. 219 Tool Stand
Four Regular Sizes with or without Drawer or Casters

● We are in a position to furnish a variety of steel equipment to meet specific shop purposes. Many of the items you require may seem like special applications but by making a few alterations we can supply one of our standard units that will exactly meet your needs. Call us on your steel equipment problems. You'll be surprised at the low cost for apparently special equipment. Write for Catalog and Price List.

No. 22-84
Bar and Pipe Rack

ANGLE STEEL STOOL COMPANY
The Steel Equipment People
33 W. Oak Street
Plainwell Michigan, U. S. A.

Maneuvers

(*Continued from page 57*)

then a swarm of Blue Douglas A-20A's would unload more flour sacks in another simulated bombardment. From the very outset Gen. Dargue used his pursuit superiority to embarrass Gen. Harmon, who was put to it to give properly escorted bomber support to his attacking Red Army while simultaneously defending with fighters the vulnerable bridgeheads created by the ground advance across the Red River.

More remarkable than the high operational standard of the air forces was their outstanding safety record. For instance, the Third Air Task Force had expected heavy casualties due to operation from makeshift fields around Lake Charles. However, Blue landing and takeoff fatalities were kept to 5, and of these, 3 were men in National Guard observation squadrons. In all, 10 men were lost—and this in spite of the fact that pursuit planes carried out their attacks on other formations with a realism and tenacity quite alarming to ground witnesses.

Credit for sustained and safe flying was attributable in no small part to the enthusiasm of maintenance crews and to the efficiency of organization. Typical was one crew of the First Observation Squadron. Though exhausted by a long day, they insisted on rushing through an unordered 100-hour check on a Stinson 0-49. The work began at midnight, and proceeded under semi-blackout conditions in a front-line sheep pasture from which the plane was temporarily operating. Such enthusiasm enabled this liaison squadron to fly an average of 22 hours, 7 minutes per day on tactical missions when otherwise paucity of planes would greatly have curtailed indoctrination of ground forces in the use of short-range air observation. In the GHQ phase alone, they flew 219 tactical missions for a total of 256 hours.

To obtain full realization of Air Corps safety achievement it is necessary to emphasize the point that flying crews often worked well beyond the point of maximum efficiency. A Red observation squadron using Stinsons was so anxious to serve the cavalry division to which they were attached that they managed regularly to pass the limit of two two-hour missions per day per crew. But so thorough had been training that even when fatigue caused pilot error, the airmen of this squadron were able to bank on their basic flying skill to redeem the situation. In taking off from a tree-bordered pasture, one pilot forgot to lower his Stinson's flaps, and yet got his ship out of the postage-stamp field undamaged. Although they operated throughout the entire maneuver period, this squadron's only mishap occurred when a plane rammed an undiscovered stump.

While praising the Air Task Forces and observation squadrons for their performance in the Louisiana maneuvers it is well to bear in mind that their work was only an indication of the high promise of the Air Corps—a promise of efficiency and power that can soon be realized if popular obsession for numerical strength does not interfere with sound expansion and training doctrine. In these same maneuvers there were many signs that haste and overgrowth can transform the Air Corps into an amorphous mass of unmilitary and unindoctrinated personnel. Already alarming is the fact that at no field did commanders compel dispersion of aircraft. Of course, the necessity for frequent flights from hopelessly overcrowded fields weighed against measures that would retard servicing. Nevertheless, in view of the fact that the vice of lining 'em up has cost Poland, Holland, Belgium, France and Yugoslavia their air forces, the observer must experience a pang of horror to see Army and Navy ships land and taxi up to form serried ranks, wing-tip to wing-tip. Certainly at the CAA field near Arcadia, where National Guard observation planes based, there was no reason for the planes to huddle like covies of quail. One end of Esler Field was especially camouflaged and fitted with tree-shaded revetments to protect three pursuit planes, yet the 21st Aviation Engineers had the greatest difficulty in inducing any pursuit to leave the concentration of planes around the hangar and take to the woods. Generally this Esler Field project and the camouflage installations at the Nachitoches airport failed to arouse proper interest. Visiting and native planes boiled in and out of Esler Field, but practically no one bothered to wander over and survey the progress the Engineers were making. Camouflaged dispersion facilities at the Red Nachitoches Field were better utilized, but so apathetic was the bulk of Red air force personnel that one generally learned of the engineers' work only by a visit to the field. Since second lieutenants today will two years hence be squadron leaders in command of such fields, this state of affairs is regrettable. It is more regrettable that the work done was attempted on a shoestring with insufficient time and not enough personnel.

Rather distressing to notice was the attitude of many reserve pilots towards the light planes which made their appearance in maneuvers. A young second

SIMPLIFIED DESIGN
FEWER PARTS
LESS WEIGHT

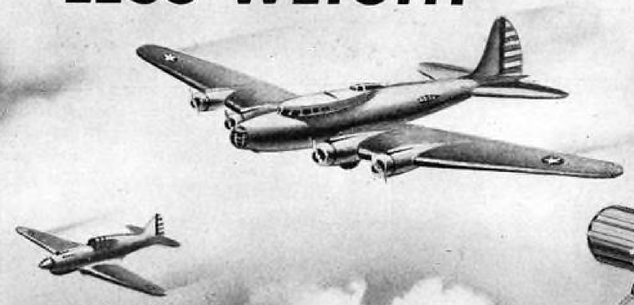

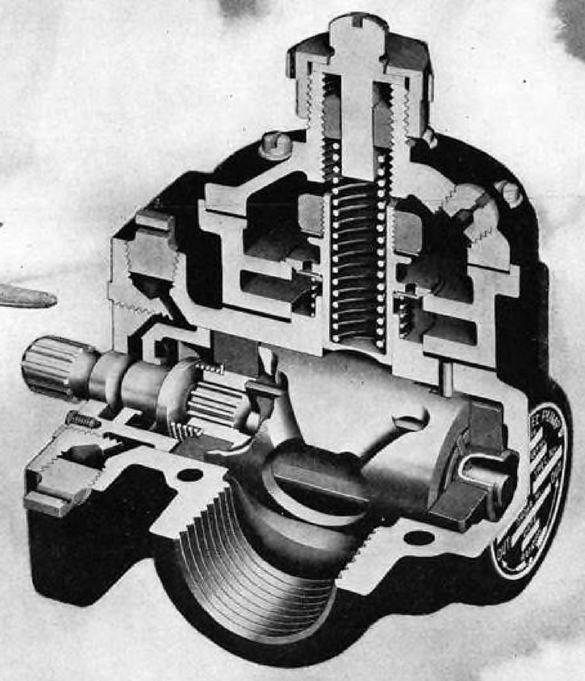

PESCO **FUEL PUMPS**

Long recognized as standards of reliability and performance, PESCO Aircraft Fuel Pumps offer these important advantages:

- Simplified design—no snap rings, internal screws, rivets or similar bonds.
- Fewer parts to stock for replacement.
- Required periodic overhaul accomplished more readily.
- Maintenance cost reduced.
- Unusually low power consumption.
- High suction lift.
- Comparative oscillograph analysis indicates pressure pulsation as slight as those of more complicated design.
- Splined rotor-coupling engagement insures greater dependability and longer life.

COMPARE THESE FIGURES

PESCO Fuel Pump illustrated above compared with other makes of same output rating.

	No. of Parts*	Weight	Power Consumption
PESCO	32	3.0 lbs.	0.09 hp.
Pump A	40	3.2 lbs.	0.15 hp.
Pump B	42	3.28 lbs.	0.19 hp.
Pump C	33	3.0 lbs.	0.12 hp.

*Excluding screws, washers and tie wires.

PESCO

STANDARD PESCO FUEL PUMPS FOR MODERN AIRCRAFT

PESCO Fuel Pump with diaphragm type relief valve (see large illustration above).

PESCO Fuel Pump with variable displacement, designed for high altitude flying.

PESCO Fuel Pump with relief valve in line and standard side ports.

PESCO Standard Pump for fuel transfer. Usually motor driven.

PESCO Fuel Pump with end ports for special space requirements.

PESCO Low Capacity Fuel Pump specially designed for smaller planes.

PUMP ENGINEERING SERVICE CORPORATION
DIVISION BORG-WARNER CORPORATION ★ 12910 TAFT AVENUE ★ CLEVELAND, OHIO

lieutenant delegated to fly a press photographer in one of these handy craft was literally terrified when he saw the tiny engine this Aeronca had. A P-40 man, he had no confidence in this ship, although it was furnished with parachutes for the two seats, with two-way radio and numerous instruments. The photographer, who was accustomed to flying Aeroncas, showed his flying credentials and attempted some elementary instruction on light planes, but the pursuit man would have none of it, and refused to believe that the ship wouldn't spin easily and would climb above 2500 feet. In the disinclination to use and appreciate the utility of cheap light planes there is some indication that the progressive spirit noticeable in older regular fliers is not always matched in the new, mass-produced reserves.

These and similar problems are minor and do not detract materially from the fine maneuver performance of the Air Task Forces and observation squadrons. The real shadow cast on this record is only indirectly a fault of the air units. But since the Air Corps is the air arm of the Army, it cannot escape responsibility for the failure to anticipate and cure the suicidal attitude displayed by ground rank and file towards air power. Following the wide popular trumpeting of the air menace,

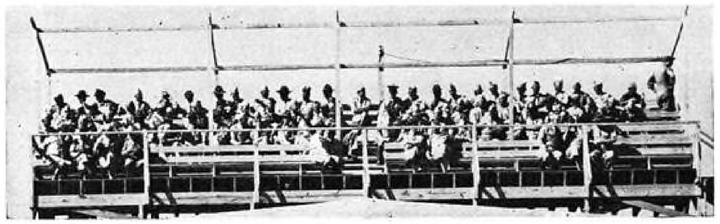

The Generals couldn't wait. During a specially staged show to prove devastating effect of bombing, many high officers of the ground forces were so little interested that they walked out on the show. This grandstand was built on top of a hangar at Barksdale Field. A total of over 4,000 officers were invited to this show.

the average citizen might think that the new Army would be fully conscious of what air power can do. It is—when the topic is raised in conversation. In maneuvers it failed to translate this mental appreciation into concrete action. While maintaining better spacing than in former years between vehicles on the march, motorized troops consistently neglected to stop and dash for the shelter of neighboring fields and ditches when enemy planes came over. Few were the men who bothered to avail themselves of a real, live plane at which to practice aiming the protective machine guns. The trucks rolled placidly on, some of the men gawping at the bombers and fighters with never a thought of the charnel house that .50 calibre bullets would make of each vehicle along the line. Though the First Armored Division is considered an elite unit, in many cases its tanks and trucks would halt when on the march in a space between two trees. Either tree would have provided full concealment for anything parked beneath.

When some attempt at camouflage was made, too frequently the camoufleur would forget that what is protected from ground observation is not necessarily hidden from the airman's prying eyes. Generally troops just didn't bother with real concealment from planes, and so ground forces could not only be bombed with great success, but observed with even greater profit.

Only the highest echelons exhibited a realistic grasp of air power. At most division and corps command posts the discipline and measures taken for protection against air action were so excellent as to appear freakish in comparison with the negligence of minor units. Message centers, staff tents and command cars were carefully scattered in thick woods, and at Gen. Patton's headquarters men's faces had to be turned down to avoid detection of activity whenever an air alarm was sounded.

Recognizing that carefully assessed maneuver "casualties" from air action really didn't impress ground rank and file in the slightest, the authorities sought to bring home vividly and convincingly the effect of air fire power. For this purpose a demonstration of air bombing and machine gunning was staged in the middle of the maneuvers. Invited were some 90 generals, and 4,000 junior officers. Because high winds retarded the schedule of this spectacular and informative show, many of the generals left their special grandstand before the affair had ended.

With apathy toward air power prevalent among ground forces, it is obvious that however well the Air Corps may fulfill the high promise it showed in the maneuvers, it cannot rest satisfied while there is danger that its supporting ground armies may be bombed and shot out from under it.

Starrett Vernier Height Gage and LAST WORD Dial Indicator simplify final inspection of a box type drilling jig at Curtiss-Wright Corporation. Inspector is checking location and alignment of drill bushings.



Leading plane and engine manufacturers rely on safe dependable Starrett Tools to help them meet the exacting demands of modern aircraft production. Write for Starrett Catalog No. 26 "V".

THE L. S. STARRETT CO.

World's Greatest Toolmakers

Precision Tools . . . Dial Indicators . . . Ground Flat Stock
Hacksaws . . . Metal Cutting Bandsaws . . . Steel Tapes

ATHOL • MASSACHUSETTS • U. S. A.

STARRETT

your ups

GENERALS SAFEGUARD

and downs

Helpful new gadgets . . .

GENERAL

TWO-IN-ONE RUBBER EARPHONE CUPS

ease the pressure from ordinary head-phones

At left you see how they may be used fully extended with helmet, or collapsed to fit over the head-piece without helmet. Washable, sanitary, odorless.

$2.00 per pair

GENERAL RUBBER WIND SOCK FOR TRAILING ANTENNA

It won't let your antenna spin, twist or whip. The rubber cone can be quickly adjusted to the proper "drag." Length, 6½" . . . Diameter at Drag Spider, 4½". Never needs replacement.

$2.50 each

See your fixed base operator or write direct to General

See your Fixed Base Operator, or Write Direct to

THE GENERAL TIRE & RUBBER CO.

AKRON, OHIO

in Canada: The General Tire & Rubber Company, Ltd., Toronto

DURING flight you don't need tires at all! But when you're taking off or coming down to a landing on the hard old earth . . . you need the best tires you can get. That's why veteran pilots recommend and use Generals.

Put tires on your ship that will see you through . . . safeguard your life and your plane with General's three points of superiority:

1. *Safety* under all conditions
2. *Service* for long-time performance
3. *Economy* for more landings per dollar

On big ships and little ships, use General Airplane Tires . . . first choice of thousands of military, commercial and sportsman pilots. You can purchase Generals from your fixed base operator.

WHAM

GENERALS ARE BUILT TO TAKE IT!

THIS TIME, GET GENERALS!

The GENERAL AIRPLANE TIRE

GENERAL — THE NAME THAT SPELLS QUALITY TO MILLIONS

SIGNALS

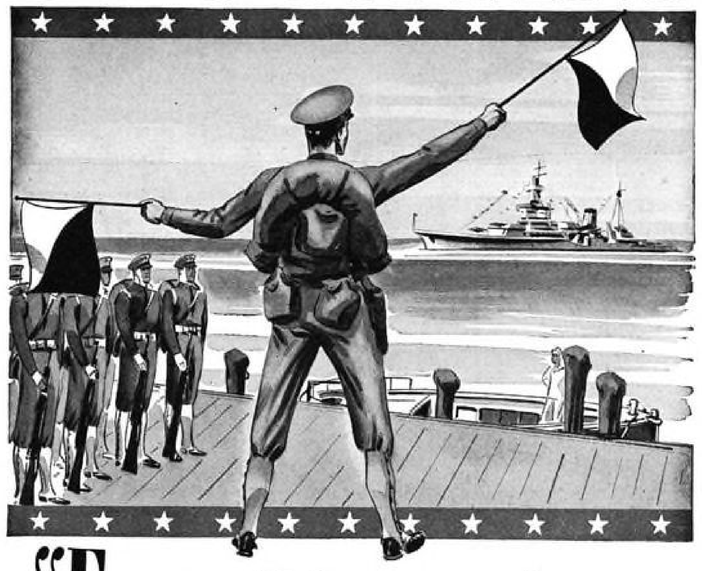

"Everything under control"

The Multichek Electrigage is like a battalion of U. S. troops. They quickly establish order and have everything under control. The Multichek Electrigages check a number of dimensions on a work part simultaneously, flashing the answers on a control panel.

This panel carries an elevation drawing of the work piece with each critical dimension shown. A signal light is provided for each of these dimensions.

A signal light showing red indicates its dimension is undersize, green an oversize dimension and amber that the dimension is truly within tolerance limits. When four or more measurements are being checked a master signal may be provided at the top of the panel to show white when all dimensions are correct. Thus the inspector looks only at the master signal unless it indicates trouble somewhere below.

Other models of this instrument are just as effective on extremely large shell bodies as this model is on small pinions less than a quarter of an inch long. Every part produced in large quantities which has several dimensions to be checked should be inspected on the Multichek Electrigage regardless of bulk.

Write for details

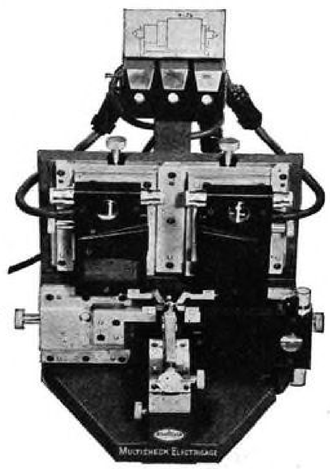

THE SHEFFIELD CORPORATION
Gage Division · DAYTON, OHIO, U.S.A.

SHEFFIELD MASTER GAGEMAKERS

Aeronca

(*Continued from page 110*)

vator movement has been lightened by a change of leverage between the stick and the shaft. These changes are said to have resulted in a complete new system with finger tip control on the stick and easy rudder movements.

The fuselage has been widened four inches at the bottom of the cabin, thus increasing the cabin and seating arrangement. The student seated in the rear seat is still about 5 in. higher than the instructor in the front. Instruments have been rearranged with the altimeter and tachometer on the outer edges of the panel; airspeed has been moved to the center of the panel and the ignition switch is now on the right hand side of the cabin above the door where it is easily accessible to both occupants.

Standard brakes will be of the improved Shinn type that has been widely accepted and approved.

Flying Wing

(*Continued from page 83*)

the present "all-wing" design is another feature which has been thoroughly investigated. Although there is still much work to be done along this line it now appears that such auxiliary lift devices can be applied as effectively to this plane as to more conventional designs. One of the basic reasons for this is that the lift increase achieved by any means on the "all-wing" plane affects the entire plane, without considering the cancelling effect of auxiliary control surfaces, fuselage, etc., of the conventional plane. In our plane the entire wing lifts during normal flight.

Engineering of the present flying mock-up was begun in July, 1939 and first flight tests were made by Vance Breese from Muroc Dry Lake in July, 1940. After early tests had proved the plane to be satisfactory as to stability and control the flight test program was turned over to Moye W. Stephens, Secretary of Northrop Aircraft, Inc., who has now made more than 200 flights during the past year.

Further engineering and development work is now under way. We hope, when we are able to turn from the desperate urgency of present military work, to be able to demonstrate air transport planes of "all-wing" design which will have top speeds as much as 100 m.p.h. greater than will be possible with conventional designs of equal power and capacity.

**Oxygen masks protect North American test pilots on high-altitude test flights.*

There are oxygen masks for pilots when the going gets tough, but a plane's finish has to take conditions as they come — sun, rain, gale-driven dust and sudden temperature changes. That's why North American planes are Berryloid-finished. In fact, three out of four planes built, have the superior protection of Berryloid Finishes.

BERRY BROTHERS
DETROIT, MICHIGAN WALKERVILLE, ONTARIO

BERRY BROTHERS · SKY-TESTED QUALITY · BERRYLOID

BOSTON · JERSEY CITY · CINCINNATI
CHICAGO · ST. LOUIS · INGLEWOOD, CALIFORNIA

BERRYLOID
AIRCRAFT FINISHES

Aircraft Maintenance

(Continued from page 59)

strategic points throughout the United Sattes. Some idea of the problem confronting these depots may be gained by a comparison of the problem to that of airline maintenance. Seventeen airlines operating approximately 500 transport aircraft require some 19 repair bases to overhaul and maintain their aircraft. Of these 19 bases, 7 will compare favorably with the smaller of the Air Corps repair depots. These bases include only the central overhaul facilities of the airlines and do not take into consideration the extensive service facilities required along the route of each line. Now, disregarding the smaller of the airline bases and assuming that the 7 large bases maintain all airline equipment, this would give us a ratio of one repair base to approximately 71 aircraft. This year the Air Corps will have over 12,000 aircraft! Assuming that under pressure each airline could handle the maintenance and overhaul of 200 aircraft, it would require 60 such maintenance bases to handle this year's production alone.

Of course, the Air Corps bases are being built on a scale more vast than has heretofore been dreamed of. But when one considers the number of engines, propellors, instruments, hydraulic units and thousands of other components which will require attention, some semblance of the magnitude of the Maintenance Command's responsibility may be had. There is apparently no limit to the number of aircraft to be built. As the number increases, the repair base problem grows in proportion. One solution to the problem in the future may be the establishment of large number of smaller yet completely equipped units. Such an arrangement would permit easier accessibility of the repair bases by the operating units.

At present the transport service supplies admirable service to the maintenance groups. The rapid transportation of equipment to be overhauled from the operations base to the maintenance depots is as much a part of the maintenance job as the overhaul of the equipment. The maintenance bases have probably not yet begun to feel the first heavy load imposed by the new group of production aircraft being delivered to the air forces. Engines in these aircraft have not yet reached the time limit before overhaul. Probably a great number of them will reach this period at approximately the same time and some semblance of war time requirements will be evidenced. Of course, the only answer to maintenance on such a large scale is the application of production methods. The Army, Navy and some of the airlines have operated on this basis before, but never on the scale that will be necessary to properly care for the huge number of aircraft being delivered.

One of the greatest problems of proper maintenance is the procurement and allocation of parts to the proper place at the proper time. Strangely enough, one small part can hold up a quarter of a million dollar aircraft which might be sorely needed for a tactical mission of importance. Certain parts required for operations maintenance such as spark plugs, brake discs, fuel hoses, lines, clamps, etc., fall in the category of those mentioned above. A careful study of the parts situation as applied to each type of aircraft will permit the formulation of a list which, if supplied to the operating units, will alleviate any possibility of delays due to parts shortages. The overhaul bases are, of course, the major source of supply of parts and our own Air Corps now has vast stores of spares for all aircraft and equipment being operated.

One of the biggest problems encountered in Britain in the operation of large numbers of new type aircraft has been that of untrained personnel. When one realizes that the mechanics whom we consider to be competent now gained their training over a number of years experience and that those now being enlisted come from the rank and file of lawyers, clerks, farmers, and other citizenry not likely to have had much experience with problems, it is easy to realize that one of the major contingencies with which we are confronted is that of training. In all probability it is infinitely better to specialize these new men inasmuch as it is easier to teach them how to care for one item of equipment thoroughly than to require them to spread their training over a large number of items of equipment. This would mean then that we would have specialists on engines, propellers, instruments, hydraulics, armament, and, in fact, on virtually every aircraft component, rather than have the old type of aircraft mechanic who was supposed to know everything.

The British are now sending many men to America for training and they certainly have not failed to realize the necessity for specialization. The United States Army Air Corps has not neglected this phase of preparation as they have undertaken a very intensive program of training a large number of men as aircraft mechanics. The manufacturers have contributed materially toward this training program by assisting in the arrangement of programs pertaining to their particular product. This could be carried even further by the establishment of units at the present Air Corps schools in large aircraft manufacturing centers.

Only a few of the problems connected with the establishment of a maintenance program to care for our new air force have been emphasized above. There are others just as large in their scope but perhaps not quite so interesting to study. For example, the supply and handling of fuel, oil and lubricants for the air force is a job which is without glamour and romance supposedly attached to aviation, yet is so vital to the operation of aircraft that poor planning or unsystematic handling would seriously impair the functioning of the air force. The tremendous amount of detail work in keeping records of overhaul time and the determination that engines arrive at repair bases at the proper time for overhaul is one which must be particularly well planned in order that the repair bases do not become bogged down with a large number of engines at one time.

These and many more problems constitute the huge job that has been given our Maintenance Command. The major problems are: (1) equipment and bases, (2) parts and parts distribution, (3) personnel, and (4) transport. Our Maintenance Command has attacked these problems with a vengeance and it is indeed gratifying to see that so difficult a task is being handled so skilfully in the beginning. This portends a smoothly functioning future for the maintenance of our aircraft. It is strange that a job so important and so difficult receives so little publicity and ballyhoo, yet the type of men required to accomplish a job like this are usually those who shy from just such recognition.

Certainly we are well on our way towards the largest and finest air force in the world backed by the most complete and able maintenance organization ever conceived.

Window Shopping

"Carry the Message to Industry" — Large portfolio of photographs showing applications of Speed-packing with Corroflex, a flexible corrugated material used in place of crates for packing large ungainly parts. Corroflex can go a long way toward relieving the drastic shortage in shipping containers; also, savings in space and weight are said to often run over 60 percent. Sherman Paper Products Corp., Newton Upper Falls, Mass.

Thompson Type F Tool Room Grinder — Catalog No. F-41, a pamphlet describing the Thompson "F" developed to meet demand for small, sensitive high speed tool room and production surface grinder. Specifications and numerous illustrations. The Thompson Grinder Co., Springfield, Ohio.

Airco Welding Procedures—One of best bits of literature telling welders proper welding method for metals under various conditions. 60¢, Air Reduction, New York, N. Y.

"Stop Dust With The Dustkop"—is title of a 4-page folder showing compact, low cost, self-contained unit dust collectors. Specifications, cutaway showing construction, together with illustrations of unit used with grinders. Aget-Detroit Mfg. Co., Book Bldg., Detroit, Mich.

Air Filters

(*Continued from page 115*)

by the filter fairly evenly throughout the entire depth of the filter media and thereby provide maximum dust-holding capacity with minimum rise in resistance. Such a filter, if properly made, should last virtually as long as the plane in which it is mounted. It can be cleaned by washing in gasoline, and oiled by dipping in airplane engine lubricating oil, both of which are readily available at any air base. The only additional equipment required for maintenance is a small supply of spare filter cells and suitable tanks for washing and charging the filters; so the transportation and maintenance problem is reduced to an absolute minimum.

The development of a suitable viscous impingement type filter which provides maximum cleaning efficiency, maximum dust-holding capacity and minimum weight and size presented a very interesting research problem. The filtration of air is a rather new art and was started only 20 years or so ago, but during that time certain standard practices have developed in applying air filters to ventilating and air conditioning service. For instance, it has been customary to limit the velocity of air flow through the free area of viscous impingement type filters to a maximum of 350 f.p.m., and to make the filters approximately 4 in. thick. The resistance to air flow had to be kept low ($\frac{1}{2}$ in. to $\frac{3}{4}$ in. w.g. when dirty) because the blowers used in ventilation service are incapable of overcoming high resistance, and filters had to have a sufficient dust-holding capacity to operate under normal dust conditions for a period of from 4 to 6 weeks before cleaning was necessary in order to keep their maintenance cost within reasonable limits. In designing a filter for military airplane service, however, it was necessary to disregard standard practice for ventilating and air conditioning service, and virtually start from scratch in an attempt to develop a thinner filter which would afford satisfactory protection at much higher air velocities, thereby reducing both the weight and the size of the filter unit. After consultation with various airplane manufacturers and government officials, the following fundamental specifications for airplane filters were established:

(1) Maximum permissible resistance when dirty—4 in. w.g.
(2) Minimum permissible efficiency —90 percent.

Having established these two limits, the performance of a filter, therefore, may be judged by the velocity of air flow and the amount of dust it is capable of accumulating before the resistance exceeds 4 in. w.g. or the efficiency drops below 90 percent. As a general rule, the efficiency proves to be the determining factor, and most of the filters tested dropped below 90 percent efficiency before the resistance reached 4 in. w.g.

With the idea of making a filter having the absolute minimum thickness, much of the original research was devoted to the development of a filter $\frac{3}{4}$ in. thick. Referring to Fig. 2, the curves marked "A" and "B" indicate the performance of two of the best $\frac{3}{4}$ in. thick filters developed. It will be noted that filter "A" dropped below 90 percent efficiency after accumulating a dust load of approximately 198 grams per sq. ft. Filter "B", another $\frac{3}{4}$ in. filter of somewhat different design, accumulated 252 grams per sq. ft. before the efficiency dropped below 90 percent, which is an improvement on filter "A", but is very poor when compared to filter "C" which is 2 in. thick. Filter "C" drops below 90 percent efficiency only after 954 grams per sq. ft. have been accumulated. The best $\frac{3}{4}$ in. thick filter (filter "B") therefore has only about 25 percent the dust-holding capacity of filter "C" when operated under parallel conditions. All tests indicated in Fig. 2 were made with a dust concentration of .03 grams per cu. ft. and an air velocity of 600 f.p.m. through the free area.

When the use of air filters on military planes was first being considered, it was thought that a velocity of 600 f.p.m. through the free area would be about the maximum which could be used, but in view of the much superior performance of the 2 in. thick filter over the $\frac{3}{4}$ in. thick unit, as indicated in Fig. 2, the possibility of using higher air velocities became evident.

Fig. 3 shows the comparative performance of the best $\frac{3}{4}$ in. filter with air velocity of 600 f.p.m. (curves "D") and two somewhat different 2 in. thick filters at velocities of 900 f.p.m. and 1,000 f.p.m. Referring again to fundamental specifications that the resistance must not exceed 4 in. w.g. and the efficiency must not drop below 90 percent, it is evident from these curves that filter "D" with air velocity of 600 f.p.m. falls below efficiency requirements after 14 minutes; filter "E" with air velocity of 900 f.p.m. is good for 30 minutes; and filter "F" with air velocity of 1,000 f.p.m. is also good for 30 minutes. The overall efficiency of filter "F" is considerably better than filter "E" and it is, therefore, preferable from the standpoint of both efficiency and the space required for its installation.

From the standpoint of weight, filter "F" compares favorably with the other filters if an air velocity of 1,000 f.p.m. is employed. As an illustration, an 1800 h.p. engine requires approximately 2700 c.f.m. (1.5 c.f.m. per h.p.). If filter "D" is used with velocity of 600 f.p.m., a net area of 4.5 sq. inches would be required, and such a filter would weigh approximately 11½ lbs. If filter "E" is used with a velocity of 900 f.p.m., a net area of 3 sq.ft. would be required, and this filter would weigh approximately 12.2 lbs. With filter "F" employing a velocity of 1,000 f.p.m., a net area of 2.7 sq.ft. would be required, and filter would weigh approximately 11.8 lbs.

The following tabulation will give a general idea of the comparative costs of the three filters for handling the same air volume at the velocities indicated:

Filter	Velocity of Air Flow	Filter Media	List Price	% Cost, Filter "F"	% Area Filter "D"	% of Weight Filter "E"
D	600 f.p.m.	UM-153	$26.00	87	100	95
E	900 f.p.m.	UM-152	28.50	95	66⅔	100
F	1000 f.p.m.	UM-155	30.00	100	60	97.4

Fig. 4

In view of this small difference in cost and the much superior performance of filter "F" its use in preference to the other units would seem logical, especially in view of the fact that it requires less space than either of the others.

Material and Construction

Some of the original air filters made for airplane service were provided with aluminum channel frames in order to reduce weight to a minimum. It was found, however, that with the rough handling air filters frequently receive steel channels hold up much better, especially at the corners where they are welded. The cost is less and by using 20-gage steel instead of 16 or 18-gage aluminum, it is possible to obtain a more rugged filter without materially increasing the weight.

The filter media used in all the air filters developed (with the exception of filter "A", Fig. 2) is a combination of knit steel wire and knit copper ribbon. The knit steel wire is placed on the air-entering side, and the first few layers are crimped in order to provide space between the individual strands of media which will permit a considerable amount of dust to accumulate without blocking off a large percentage of the air passage. These crimped layers of media are followed by flat layers of knit steel wire which forms a more dense section, and a still more dense section is formed by the woven copper ribbon. Again referring

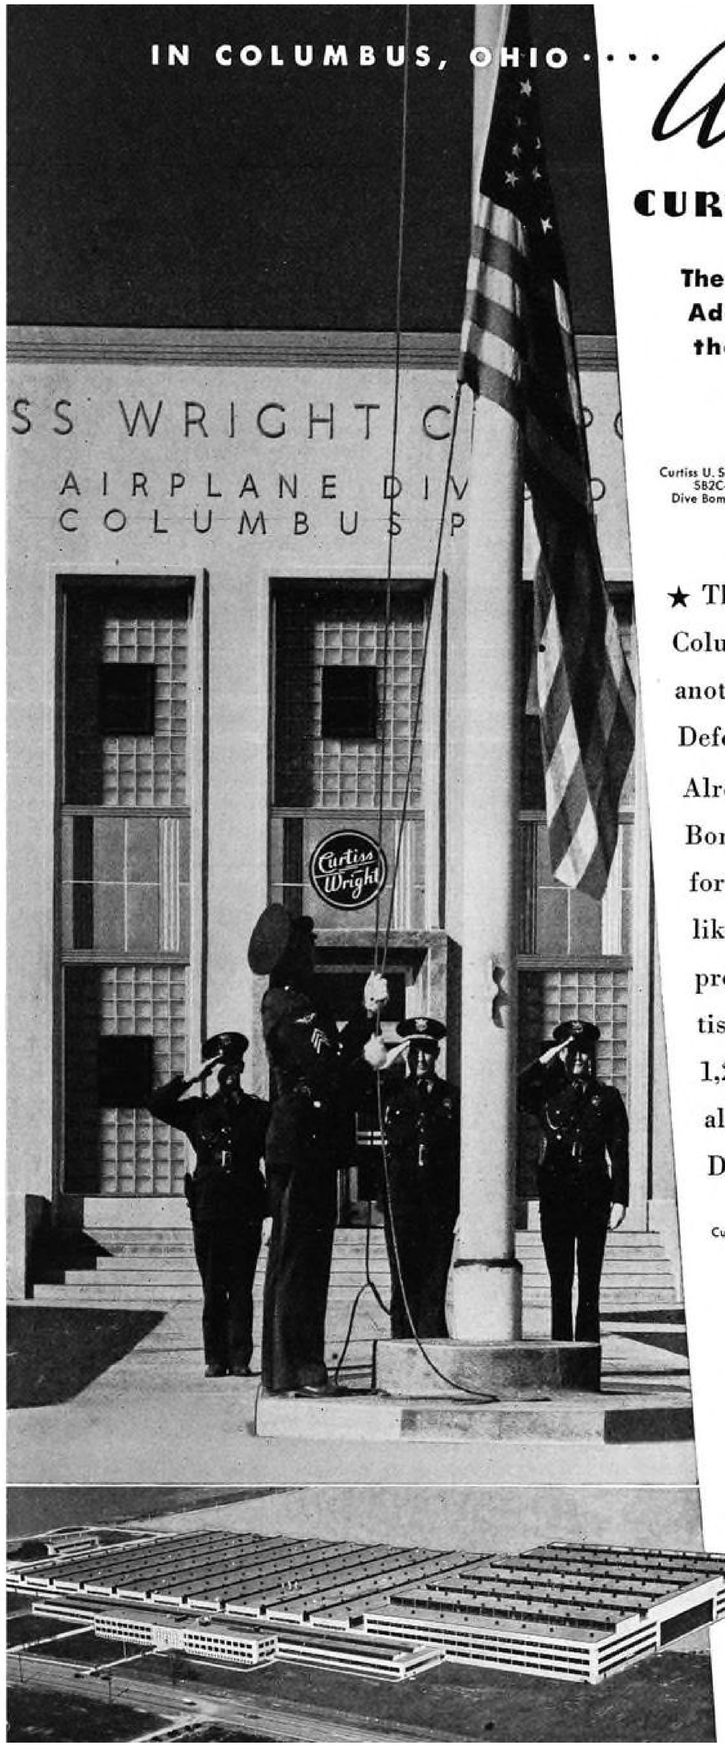

Another
CURTISS MILESTONE

The New Curtiss Columbus Plant Adds its Production Might to the Nation's Defense Effort

Curtiss U. S. Navy SB2C-1 Dive Bomber

★ The dedication of the new Curtiss Columbus plant on December 4 forges another strong link in the country's Defense Effort.

Already engaged in production of Dive Bombers and Scout Observation Planes for the United States Navy, Columbus, like Buffalo and St. Louis, is geared to produce all of the many types of Curtiss Military Aircraft. Its floor area—1,282,000 square feet—is greater than all of the facilities of the Airplane Division of Curtiss-Wright in 1940.

Curtiss U. S. Navy SO3C-1 Observation

CURTISS-WRIGHT Corporation
AIRPLANE DIVISION
BUFFALO, N. Y. COLUMBUS, O. ST. LOUIS, MO.

to Fig. 3, the superior performance of filter "F" over filter "E" was obtained by adding 8 more layers of crimped and flat knit steel wire. In addition to improving the efficiency and permitting higher air velocity, crowding this extra media into this 2 in. space will result in better wearing qualities. The reason for this is that these filters will be subjected to considerable vibration, and the more tightly the individual layers of media are pressed against each other, the less opportunity they will have to move and cause wear by rubbing.

Installation in Airplanes

The size air filter required for an airplane engine is determined by the following procedure. It is first necessary to determine the cubic feet of air to be handled, and the usual practice is to figure 1.5 c.f.m. per h.p. at military or take-off power, whichever is the higher. The next step is to decide on the type of air filter to be employed and select a velocity of air flow for this filter which will give satisfactory performance. The net filter area required is then determined by dividing the c.f.m. by the velocity of air flow, and after this is calculated the dimensions of a filter which will give this net area can be determined by the space available for mounting. As far as possible, air filters should be of rectangular shape and must be absolutely flat.

Air filters may be installed at any convenient point between the air intake and the carburetor, and this is a problem primarily for the airplane manufacturer to solve. Many installations are being made directly in the air scoops. Filters so installed should be mounted in such a manner that loose dirt particles will tend to fall away from the filter panel, and suitable means such as slots or tubes should be provided to carry overboard any dust that collects in the duct on the up-stream side of the filter. The size and number of such slots, however, should be held to a minimum to avoid excess loss in ram.

On installations in which turbo superchargers are used, the filter may be installed either before or after the supercharger. The consensus, however, seems to be in favor of installing them after the supercharger and intercooler. The only disadvantage with such an installation is that the supercharger is not protected from the abrasive effect of the dust, although from information now available no appreciable wear has occurred on superchargers under conditions which caused severe engine wear. *A bypass around the air filter is essential when it is installed in a position where it may become stopped up by snow or ice.*

No means need be provided for bypassing air around the filter if the hot air intake connects directly to the carburetor without going through the filter, but it is important that no heated air should be passed through the filter. Filter should be accessible for servicing with the removal of a minimum amount of cowling. Rapid acting fasteners should be used to hold filter channels in place except when the filters are installed on the pressure side of the supercharger, in which case the use of a limited number of screws is permissible.

Summary and Conclusions

(1) Tabulated below are the various characteristics of a viscous impingement type air filter which deserve special consideration, in the order of importance:

(a) Ability to maintain a high cleaning efficiency even after a large amount of dust has been accumulated.

(b) Strength of construction and ability to withstand frequent and rough handling—Permanency.

(c) Size—Space required for installing.

(d) Weight.

(e) First cost.

(2) The superiority of filters 2 in. thick over filters ¾ in. thick is definitely indicated.

(3) Of the 30 or more filters made and tested, filter designated as UM-155 (Filter "C" Fig. 2 and Filter "F" Fig. 3) is by far the best, and costs very little more than inferior designs. An interesting sidelight in this connection is the fact that filter "E" and filter "F" are identical in external appearance, which goes to show that you can't tell much about an air filter just by looking at it.

(4) It is the opinion of some authorities that a filter should be able to operate for a minimum period of 30 minutes with a concentration of .03 grams of dust per cu. ft. of air handled, without exceeding 4 in. w.g. and without dropping below 90 percent in cleaning efficiency. Filter "D" does not meet this requirement even with a velocity of only 600 f.p.m. Filter "E" barely qualifies at 900 f.p.m., and filter "F" barely qualifies at 1000 f.p.m.

(5) Improved performance can be obtained from any of the filters tested by using somewhat lower velocities than those for which curves are shown in Fig. 3.

(6) Test results are influenced by a number of factors other than filter design, such as (a) temperature, (b) viscosity of oil used, (c) specific gravity and particle size of dust, (d) test procedure, and (e) dust concentration per cu. ft. These five possible variables were controlled as indicated below:

(a) All tests were made at temperatures varying from 60 deg. to 80 deg. F.

(b) 120-second (Saybolt Universal Viscometer at 210 deg. F.) airplane engine lubricating oil was used for charging the filters being tested.

(c) Portland Cement was employed as the test dust. Dust was first dried and then screened for a sufficient time to get 100 percent through the 100-mesh screen and at least 50 percent through the 325-mesh screen.

(d) Uniform procedure was followed on all tests covered by this report. For details see "Supplementary Data."

(e) Dust concentration was maintained at .03 grams per cu. ft. regardless of air velocity, by use of an automatic dust feeder of the vibration type which fed a uniform mixture of fine and coarse dust particles.

Supplementary Data
Apparatus and Test Procedure

The apparatus consisted of a duct of sufficient length to obtain proper air distribution and mixing of the dust and air, of a size and design to take an 8 in. x 9⅛ in. filter either ¾ in. or 2 in. thick. The duct was connected to a high pressure blower and had a damper to control the amount of air which the blower pulled through the system. Inclined draft gages were used for measuring the resistance or pressure drop across the filter, and for measuring the pressure drop across the calibrated orifice placed at the entrance of the duct to measure quantity of air flowing in the system. The test dust was introduced by a vibration type dust feeder in such quantities that a uniform dust concentration of .03 grams per cu. ft. of air was obtained. A balance was used to weigh the filter and the dust fed into the system.

The filter to be tested was dipped in 120-second (Saybolt Universal Viscometer at 210 deg. F.) airplane engine lubricating oil and allowed to drain over night. It was then weighed and placed in the test apparatus. The proper amount of dust to give a dust concentration of .03 grams per cu. ft. at the rate of air flow employed for a period of ten minutes was weighed out. The test was then started and conducted for ten minutes. The filter was then removed from the system and weighed. The dust that settled out in the duct in front of the filter was removed and weighed and this weight subtracted from the weight of the dust fed into the system to obtain the actual amount of dust entering the filter. The efficiency of the filter was then determined by dividing the weight of the dust caught by the weight of dust actually entering the filter cell. At least three such ten minute tests were made on each filter. The test dust employed was Speed Portland cement, all of which passed through 100-mesh screen and at least 50 percent of which passed through 325-mesh screen. Dust was dried by heating at 215 deg. F. before screening for a sufficient length of time to drive out all moisture.

Unparalleled for deep drawing of steel, H-P-M Fastraverse Presses handle duralumin with equal efficiency. The large gasoline tank parts being pressed at the Douglas Santa Monica plant are typical of the important role H-P-M "all Hydraulic" equipment is playing in industry's "all-out" defense production. What is Your Pressing Problem?

THE HYDRAULIC PRESS MFG. Co.
Mount Gilead, Ohio, U. S. A.

District Sales Offices: New York, Syracuse, Detroit and Chicago. • Representatives in Principal Cities.

THE AIRCRAFT INDUSTRY ADOPTS
H·P·M Fastraverse Blankholder Presses
FOR DEEP METAL DRAWING ★ ★

Upper gasoline tank section for Douglas C-47 cargo carrier or troop transport. Specifications 10-⅝" deep × 77-¾" long × 32-¾" wide. Material .064" thick Alum sheet 3SO.

Welding Procedure

(Continued from page 117)

stance for which it is desirable is the attachment of a thin gusset plate by means of a fillet weld. "Scale" welding is naturally slower than either forehand or backhand, but does have the advantage of causing less distortion. *It should not be used except for those special purposes for which it was developed.*

The most important precaution regarding "scale" welding is to keep the weld protected by the flame envelope at all times. When allowing each succeeding weld to solidify, draw the flame *back along the line of the flame.* Do not flick it off to one side.

4. Qualification of the Welding Operator To Follow the Procedure.

In many respects this is the most important part of the procedure control. In welding shops of plants not using a procedure control, practically every welding operator uses a slightly different technique from the rest. Some always use forehand welding, others always "scale" weld. Flame adjustment is far from uniform and ranges all the way from slight excess acetylene to definitely oxidizing adjustments. Some operators allow the puddle to flow forward onto solid metal and then attempt to "dig it in" by dipping the inner cone deep into the puddle. Some operators start a puddle and, instead of keeping it uniform in size, allow it to grow continuously larger. When it appears that the puddle will get out of control, they flick the flame off to the side to allow it to cool, and, of course, thus expose the molten metal to the oxygen of the air. Frequently operators doing "scale" welding expose each successive weld puddle to the air. After observing such variations in welding technique, it becomes no longer a source of wonder that the welding results are not uniform. The fault lies in the lack of definite control. The proof in this statement is that in those plants having a definite procedure control, consistently good results are obtained.

5. Inspection and Testing of Completed Work.

The most widely used testing method for completed work in aircraft is the Magnaflux test. The principle on which this test is based is that an electric current passing through a conductor sets up a magnetic field. Any discontinuity in structure of the conductor will cause a change in the lines of magnetic flux, and this change can be indicated by small magnetic substances, such as iron filings.

In the practical application to aircraft, an electric current is passed through a part at relatively low voltage and the part is either submerged in a tank having iron filings suspended in kerosene or liquid from the tank is pumped over the part. A visual examination will reveal cracks at or near the surface of defective parts because of the concentration of iron filings at such points. In some plants parts are given a coat of light green paint before testing as this aids the inspector in seeing the filings.

Jigs and Fixtures.

As has already been mentioned, the design of jigs and fixtures is rightfully a part of procedure control. This function should be performed under the direction of the welding supervisor, even if the actual construction work is performed by a separate department.



Fig. 12—Here sections of welding tack-welded to the upright sheets act as a jig. Such a procedure should never be used on tubing. Unless the part is to be heat-treated after welding, the welding should be allowed to touch tubing only where welds are to be made.

Jig design is a broad subject, perhaps as broad as the subject of design of the structural parts. Therefore, a few general suggestions are all that can be given here.

A jig should be designed with thought to the properties of the material being welded. S.A.E. X4130 is air-hardened. Any large masses of jig close to a weld will serve to hasten the quenching of the weld and, sometimes, may increase the tendency to form less ductile zones.

Oxy-acetylene welding can be done in any position, but the most consistent results will be found in those welds which are made in the flat position. It becomes advisable, therefore, to make all jigs so that they also become positioning fixtures.

The design of jigs for motor mounts, for instance, varies widely from plant to plant. Some jigs require the operator to make some welds lying on his back, welding in the overhead position through a small hole in the bed plate of the jig. In others the man must crawl into the most awkward position to complete the work.

The best jigs for motor mounts are those which make it possible to weld in the flat position, or nearly so, at all times while the operator is in a comfortable position. Such jigs cost somewhat more but are justified from both the standpoint of the amount and the quality of the work done in them.

The subject of operator comfort receives considerable attention in those plants doing consistently good work. It is inefficient to require a man to assume awkward and tiring positions. He obviously cannot do his best work. Stools of various heights best suited to the work should be provided wherever possible.

Another point regarding jigs which should be stressed is the method of clamping. Quick-acting clamps are best. These require less time for mounting materials and often make it possible to hold parts fairly rigidly during welding itself and yet release the stress while the material cools through the brittle range.

In one plant, small box-like parts are tack-welded in a jig but removed for welding. To minimize distortion during welding, short lengths of welding rod are added to support the parts. After welding, these are melted off. This method is excellent when welded to the edges of sheets, but should not be used to support tubular structures. The amount of welding performed on any tube should be kept to a minimum. If the designer has located the welds at the point of least service stress, his efforts may be nullified by any welding done at other points.

In conclusion it should be stressed that consistently good results from a welding department are assured when management: (1) designs for welding; (2) establishes a procedure which will give the results expected; (3) and qualifies the welding operators to follow that procedure.

Important Precautions for Operators

1. *Use no oil.* Do not handle equipment with greasy hands or gloves.
2. Use a slightly excess acetylene or neutral flame for steel welding—never fan oxidizing flame.
3. Never do any welding or cutting on containers that have held a flammable substance until they have been thoroughly cleaned and safeguarded.
4. Have equipment inspected at frequent intervals.
5. Do not use blowpipes, regulators, or other oxy-acetylene equipment in need of repair.

Your Son's Future in AVIATION

You've watched your son's interest in aviation grow from early childhood. You've seen him build model airplanes, watched him pore over aviation magazines. The day he told you, "I want to learn how to fly," you understood.

You knew that he loved flying just as your neighbor's son loved law, journalism or medicine. You knew that each would find adventure and success in the field he loved; that each would have to study hard to master the profession he chose. You knew that aviation was the most sensational development of modern times; that it was constantly expanding and would grow to undreamed-of proportions after the war. This is why you realized that your son's chances for success were greater in aviation than in any other field.

You have heightened your son's chance for a successful future by giving him the understanding and encouragement he needs. But you can do more to further his ambition. You can help him select the best place for his training.

The school your son chooses is of vital importance. The school is truly the cradle of the aviation industry. If your son gets the right kind of training at the *beginning* of his career, his opportunities for employment and rapid advancement will be greatly enhanced. This is why he should select a well-established, government-approved school that is recognized in the industry.

The Dallas Aviation School was established in 1926. It is certified by the United States Civil Aeronautics Administration; is recognized by leaders in the aviation industry and is located in a state whose climate is favorable to flying the year around. It is the school we hope your son will select for his training.

MAJOR WILLIAM F. LONG,
PRESIDENT.

DALLAS AVIATION SCHOOL & AIR COLLEGE

LOVE FIELD, DALLAS, TEXAS

MAJOR W. F. LONG, Dallas Aviation School,
Love Field, Dallas, Texas.

Without obligation, please send your catalog to:

Name..... Age.....

Address.....

City..... State.....

A-12-41

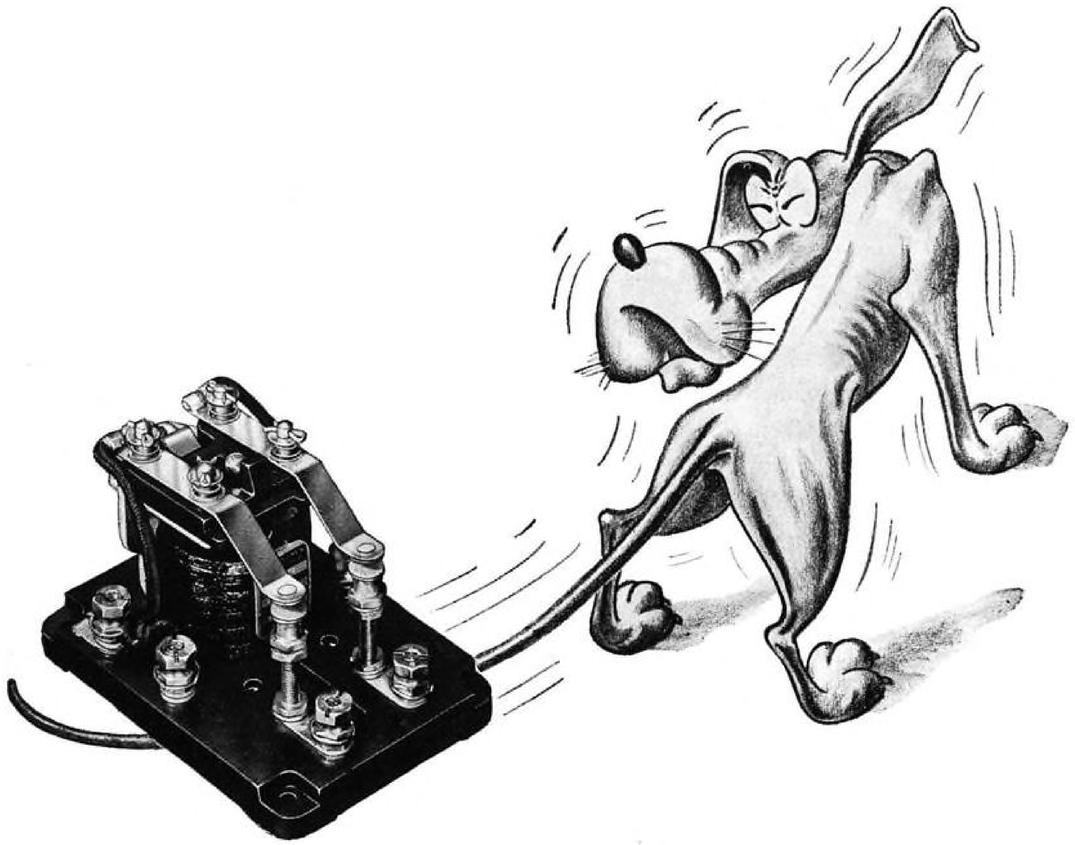

DON'T LET THE TAIL WAG THE DOG!

Any relay that is not exactly suited to its specific job is likely to mean lost time and motion in both engineering and production—and might even handicap the efficiency of a product. To attempt to make the best of a relay that isn't *quite what you need* is truly "letting the tail wag the dog."

Naturally, Dunco offers a complete line of standard "stock" relays... covering the widest range of applications... Each of these has proved its efficiency for a given purpose. But there are still many kinds of applications which require special units if real efficiency is to be attained. It is in this phase of special development that the full force of Dunco's long experience and advanced engineering is best evidenced.

Every Dunco Relay is manufactured with the greatest care. Each is given thorough-going tests as a complete unit before being released. This is in addition to many individual component tests during the course of manufacture. Special Dunco Relays are given exhaustive tests under a duplication of the factors which are to be met in actual operation.

This is the kind of detailed care that has made Dunco Relays the first choice of the nation's leading relay users. Write today for complete catalog.

DUNCO RELAYS AND TIMING DEVICES

A Complete, Quality Line—Individually Adapted to Your Specific Needs

STRUTHERS DUNN, INC., 1322 CHERRY ST., PHILADELPHIA, PA.

Selig Altschul

(Continued from page 126)

earnings statement reveals one reason for the lack of investor support. TWA will be the only major carrier to finish the year at a loss, despite the benefit of increased mail compensation. The company has had a difficult time developing any real earning power. It is necessary to go back to 1936 for the company's most profitable year when it showed a net income of $205,000. For the years 1937, 1938 and 1940, an aggregate net deficit of about $2,000,000 was reported. (A retroactive mail rate adjustment of about $400,000 converted a 1939 loss into a small profit). With its revenues bolstered by income received from training pilots for the U. S. Army Air Corps and the British, there was some hope that TWA might make the profit column for 1941; however, the company will have to try again next year.

TWA, in an effort to expand its routes, has formed a new air line corporation with the New Haven railroad. Control of the new corporation to be known as TWA-New England, Inc. will be held by TWA with a 55 percent stock ownership. In addition for a route between New York and Boston, this new combine plans to apply for routes throughout the southern New England territory. As with all new route applications, these petitions promise to take a long time before granted—if at all.

The association of TWA with a railroad in this venture recalls an interesting sidelight on the air line's origin. The nucleus of TWA was formed in 1929 under the financial aegis of the Pennsylvania Railroad. Originally investing $502,000 in this enterprise, the railroad ultimately sold its interest at a sizeable loss. An officer of the railroad, however, has continued on TWA's board of directors. This new railroad affiliation should rekindle old family ties as the Pennsylvania Railroad interests own about one-fifth of the common stock of the New York, New Haven and Hartford Railroad Co.

Other aspects of TWA's early financial history may be of further interest in view of recent developments. In 1935, financial control of TWA was purchased by Lehman Brothers from General Motors. Early in 1939, Howard Hughes purchased Lehman's approximately 100,000 shares of TWA and control. The records and published reports indicate that the net result of the transaction was an estimated loss of more than $300,000 to Lehman Brothers.

This same banking firm has again indicated its interest in the domestic air transport industry by becoming interested in two of the smaller lines. National Airlines received financial assistance from Lehman Brothers along with business advice. In part consideration, the air line has granted the bankers an option to purchase 10,000 shares at $7.50 per share at any time before April 15, 1944. At the present price of the stock, this option is of no tangible value. However, much can happen in two and one-half years.

In March, 1941, Lehman Brothers also entered into a purchase agreement with Continental Air Lines, Inc., purchasing 50,000 shares of stock at $3.75 per share, to be offered to the public at $3.80 per share. In consideration of this agreement, Continental granted Lehman an option to purchase an additional 12,500 shares of stock for a four year period at $3.80 per share.

This participation of a leading banking house in two of the smaller lines is indicative of the broadening interest in the securities of all of the air lines. At the present time, every domestic air transport company, except one, has securities outstanding in the hands of the public. As recent as two years ago, the investing public confined its interest, for the most part, to issues listed on the exchanges. These were few in number. However, as the industry became more firmly established and the individual lines began to develop some earning power, the public was "invited" to participate in the ownership of these various companies. As a result, the last year or so has seen many offerings of stocks of companies previously owned entirely by the pioneer founders. The "pioneers", in most instances, have found it profitable to sell part of their holdings.

TABLE I

Capitalizations and Markets—Domestic Air Lines

	*Approx. Market	1941 High	1941 Low	Listed or Traded	†Common Stock Outstand. (Shares)
American	51⅛	58¼	40	NYS	575,000
Braniff	4⅛	5⅛	4⅛	OTC	400,000
Canadian-Colonial	2⅛	5	2⅛	NYC	260,000
Chicago & Southern	4¼	6⅛	3⅛	OTC	167,730
Continental	4	4⅛	2½	OTC	250,906
Delta	9	9	8½	OTC	198,384
Eastern	29⅛	34	24	NYS	572,178
Mid-Continent	3	3⅛	2	OTC	388,799
National	5⅛	7	5½	OTC	270,000
Northeast	3⅛	3⅛	3⅛	OTC	300,000
Northwest	12⅛	14	7⅛	NYS	234,920
Penn-Central	10	14⅛	8⅛	NYC	331,790
TWA	12⅛	17½	9½	NYS	950,000
United	14	17½	9⅛	NYS	1,500,451
Western	3⅛	5⅛	3⅛	NYC	409,954

Notes

NYS—New York Stock Exchange
NYC—New York Curb Exchange
OTC—Over-the-counter—(Bids used)
*As of Nov. 7, 1941
†Excludes any preferred stock or options

Barron's Stock Averages

	Aircraft	Air Transport	50 Stocks
Nov. 7, 1941...	35.92	23.94	68
Oct. 31, 1941...	36.30	23.03	68
Oct. 24, 1941...	37.08	23.72	68
Oct. 17, 1941...	35.58	22.50	68
Oct. 10, 1941...	36.08	22.81	70
Nov. 8, 1940...	41.70	29.44	82

Illustrating the extent of the public interest in air transport stocks, the first complete up-to-date summary of all air lines ever compiled in such manner is presented in Table I. The basic capitalizations, together with the market ranges for this year, are presented for every company that has securities outstanding in the hands of the public regardless if the issue is listed on a national exchange or traded "over-the-counter". Moreover, this table also affords a comparison of the market action of each issue during the year. In most instances, the market prices were higher during 1939 and 1940.

The only domestic air line which failed to make any public offering of securities throughout this period was Inland Air Lines, Inc. The reason may not be difficult to find when looking at the company's earnings trend. For example, while every line has shown consistent gains in gross passenger revenues, particularly during the summer months, Inland actually reported declines for July and September.

The action of Pan American Airways in declaring a $1.00 dividend came as a pleasant surprise to the financial community. The last payment was 25 cents per share, made in November, 1938. This disbursement reflects the improved status of the company's operations. This stock has also been in the forefront of the group making new highs for the year. At current price levels, it is up about 80 percent from its low of 10.

Despite its expansion expenses, Pan American's earnings are definitely on the uptrend this year. Net income for 1940 totaled $2,256,318 and surpassed 1939 results by 12 percent. However, per share earnings were lower—being $1.19 in 1940 and $1.46 the previous year. In March, 1940, 525,391 shares of stock were sold to provide $6,250,000 and increased the total stock outstanding to 1,887,355 shares. This equity will be diluted by the exercise of options outstanding. A total of 50,000 shares are subject to option at $12.50 per share to Pres. Trippe at any time up to Feb. 28, 1942. At Dec. 31, 1940, a total of 62,645 shares were also allotted in connection with the company's management stock purchase plan at $12.50 per share exercisable during the four month period to end Oct. 31, 1943.

As long as certain fundamental rate questions are to be determined and as long as expansion programs are to be fulfilled, dividend payments in the air transport industry are likely to be deferred or substantially reduced. Regular payments, however, are being made on the preferred stock outstanding by two companies: American and Chicago & Southern. During 1940 the only such payment made was by American Airlines to the extent of $1.00 per share on its common stock.

Light Plane Maintenance

(*Continued from page 73*)

from all parts of the Nation, cover approximately 3500 airplanes. They cover operations at airports located from sea level to more than 7000 feet above sea level, from airports which require operations on skis as early as October to airports where it never freezes, from airports in the dust bowl with unsurfaced runways to all-way airports covered with blue-grass, and to those with beautifully paved runways. These maintenance reports describe airplanes of operators whose business policy is to avoid spending money for repairs as long as possible to operators who believe in the axiom, "A stitch in time saves nine." These reports come in to Washington from the regions and present a story of almost limitless possibilities. It is the responsibility of those who review these reports to read that story. It is their responsibility to learn from the reports things which might be done to give some help to each, or any, of the three musketeers.

Sectional Differences

Certain incidents seem to happen in various parts of the country to certain airplanes. When things happen like that, the answer is easy because the failure is contingent upon very special conditions. Often, airplane "A" is subject to failures to which airplanes "B," "C," and "D" are immune. Again the answer is easy because that particular type of trouble is one that "B," "C," and "D" have either overcome or avoided. "A" is told of the existence of this trouble and finds little difficulty in overcoming it. The Washington reviewers of maintenance reports notify the manufacturers involved, suggesting a remedy when it is apparent. The manufacturers, after assuring themselves that the proper remedy is developed, send bulletins to the flight contractors indicating the corrections. If these corrections are of importance to safety and the proper performance of the airplane, the Aircraft Engineering Division of the Civil Aeronautics Administration makes it mandatory for the operator to comply with the bulletins.

The study of these epidemics, or chronic ills, is extremely interesting. Frequently they occur only under one operating condition, or a combination of operating conditions. Sometimes they pertain to faulty design on the part of one manufacturer, which might show up as a welded joint which cracks in too many of his airplanes, or in frayed control cables which rub too hard in the fairleads, or perhaps the hinges of a tail surface develop defects similarly in too many cases. The cures for such as the above are simple. In the case of an improper weld, members are made of different material, or the welds webbed, or made larger. Control cables are rerouted slightly to reduce rubbing. The hinges of the tail surfaces are redesigned to serve better.

Faulty Operation

Sometimes the ills are due to faulty operation; and when operation is at fault the first thing noticed is that the ills do not confine themselves to any particular airplane or any particular section of the country. Essentially they consist largely of those ills which are to be expected when engines are not properly warmed before take-off, when throttles are wide open all the time, and when regular and frequent maintenance inspections are not made by the operator's mechanic. Pilot and mechanic carelessness accounts for many engine ailments. Many broken landing gears, and airplanes out of proper rig. These are perhaps the most difficult ill for us to cure. They are cancerous in their persistence! Careless men just will be careless men! Our recourse is to inform the operators and our regional supervisors about the existence of these ills and the importance of curing them; and then to see that if improvement is not shown in the operations wherein dangerous carelessness is practiced they, the contractors, do not continue to contract for flight training with the Government.

Ills due to maintenance frequently show up in the log book as irregular and too infrequent airplane and engine checks. They also show up as forced landings due to running out of gas or oil. Faulty condition of the ship and engine is so apparent to our regional supervisors that frequently we can effect a remedy before a mechanical failure occurs—a case where we may "lock the barn before the horse is stolen." However, the means of effecting improved general conditions of maintenance are similar to those we must apply to faulty operation—that is; education, education, and again education; and if we are unsuccessful in this, to leave the operator by the way side.

Maintenance Saves Money

Thousands of dollars have been needlessly spent for replacement parts which would not have been necessary if maintenance instructions had been followed. Engines have been returned to manufacturers for replacement of cracked cylinders caused by incorrect gasket material being used by field mechanics. In some instances gasket material was too thin, increasing the compression ratio; and some material was too thick and permitted the barrels to flex and crack when they were tightened into position. One report covered the installation of gasket material that overlapped between the barrel pilot and the crankcase, which made it impossible to pull the cylinder down tight into the crankcase.

Other cylinders that failed showed definite signs of detonation, due to either use of improper fuel, wrong size carburetor jets, improper use of mixture control, or the spark advance being too early. Had the manufacturer's recommendations been followed, not only would the replacement parts have been unnecessary, but loss of use of equipment, during the period of repair, would not have occurred. Some manufacturers have issued bulletins in which they recommend periods between engine overhaul; and in the majority of cases this will be between 400 and 600 hours. Frequently a top overhaul is recommended, in addition, at approximately 200 hours. We find that operators who are performing these overhauls as recommended by the engine manufacturer have less mechanical difficulty, buy fewer parts, and are able to keep their equipment in the air more consistently. Operators who follow manufacturer's directions are definitely able to save money.

The program of training in effect at present has made possible the establishment of an organization admirably suited to recognize and gather into one place knowledge of fundamental airplane "ills." This fund of information is available for interpretations which are important in the future development of the industry. They have shown that development must come with a considered coordination of the three musketeers—design, operation, and maintenance. Of these three, design is the more susceptible to constructive suggestions, but each of the three is equally important and care must be taken to insure that each shows progress. It is because of the manufacturer's ready cooperation and his promptness in helping to rectify troubles by issuing instructional bulletins to the users of his aircraft that we have stated that design is the musketeer most readily brought into line.

The records of the Civilian Pilot Training Program justify an optimistic outlook to the future airplanes being maintained more intelligently and thus more economically.

Britain's "New Heavies"

(Continued from page 105)

ceilings of aircraft attempting to intercept them. In fact, the ceiling of the Boeing Fortress is not actually known, for it will still climb above 40,000 ft., where atmospheric pressure is about 1/5 what it is at sea level (14.7 lb. per sq. in.), beyond which human endurance and ingenuity at present fails. Even the older models, which the British Purchasing Commission rejected early in 1940, had ceilings labelled 40,000 plus, for no one then, as now, knew how much higher they could go.

The reason for the exceptionally high ceiling for the Boeings is, of course, the turbo-supercharger developed by General Electric, which at altitudes above 20,000 ft. is superior to the mechanical type supercharger favored by the British. Moreover, although the average European bomber is not steady enough to drop bombs accurately at 20,000 ft., being confined to "regional bombing", our own Air Corps is said to have placed several bombs within a 25 ft. circle on the ground from a Fortress at that altitude. This stability, according to Eddie Allen, Boeing's flight engineer and a former Associate Editor of AVIATION, is entirely a matter of designing a bomber's tail surfaces.

Regarding the turbo-supercharger, it is interesting to note that the Stirling has an alternative power installation of Cyclone 14's which could be fitted with the General Electric turbo supercharger, thus giving the British bomber a higher ceiling than it otherwise could attain. However, installation of the Cyclones may be merely because the British have not yet got into quantity production on such aircooled radials, and need to augment their supply.

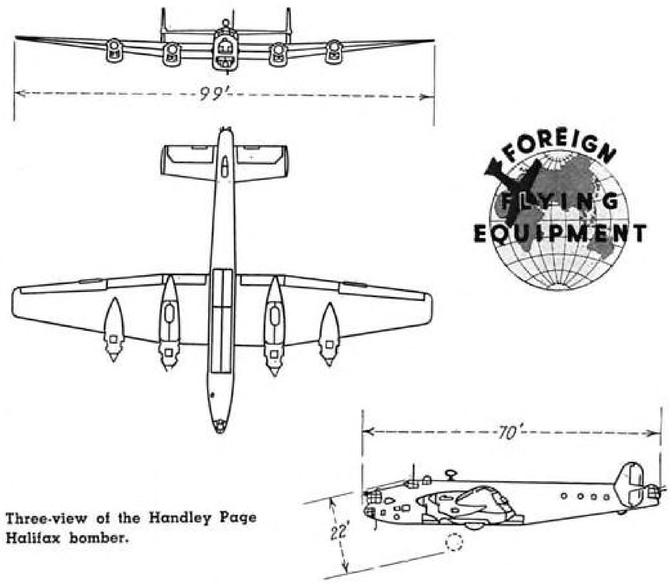

Three-view of the Handley Page Halifax bomber.

FOREIGN FLYING EQUIPMENT

At any rate, whichever the case, it is unlikely the Stirling, with its greater weight and shorter wing span, could fly at the heights the Fortress will.

Needless to say, a cabin-heating arrangement has been incorporated in the British bombers, for at altitudes above 35,000 ft. the temperature is about 67 deg. below zero. The crew, also, quite likely wear electrically heated suits in case a shell fragment should let in the numbing cold of the substratosphere.

Judging from available reports, it would seem that the new British bombers have exceptional load-carrying capacity; greater, in the case of the Stirling, than that of the Fortresses now in service abroad, but having lower ceilings than the present Boeings. Lord Beaverbrook is quoted as saying that the "Flying Fortress is the most valuable and useful of all bombers . . . with all respect to the Stirlings, Halifaxes and Manchesters." Fortresses won't carry so heavy a load as some of their bombers, he said, but they will carry a load higher with a bigger measure of safety and a higher degree of efficiency.

Later Boeings, the B-17F's and others to be produced under the 500-per-month program, will have more defensive armament, greater bomb capacity, more armor for the crews, and radio locators for enemy aircraft, which should increase their effectiveness considerably.

But the steadiness at extreme altitudes beyond effective reach of AA fire and interceptor planes, which makes for accurate bombing, would appear to be a performance characteristic required in long range, heavy bombers if they are to carry out their missions efficiently. This characteristic the Boeing Flying Fortresses have, and possessed long before Britain became aware of its tactical value.

General Electric turbo-superchargers, shown here in assembly, make it possible for Boeing Flying Fortresses to climb higher than human endurance at present will follow by maintaining sea level pressure in the engines at high altitudes.

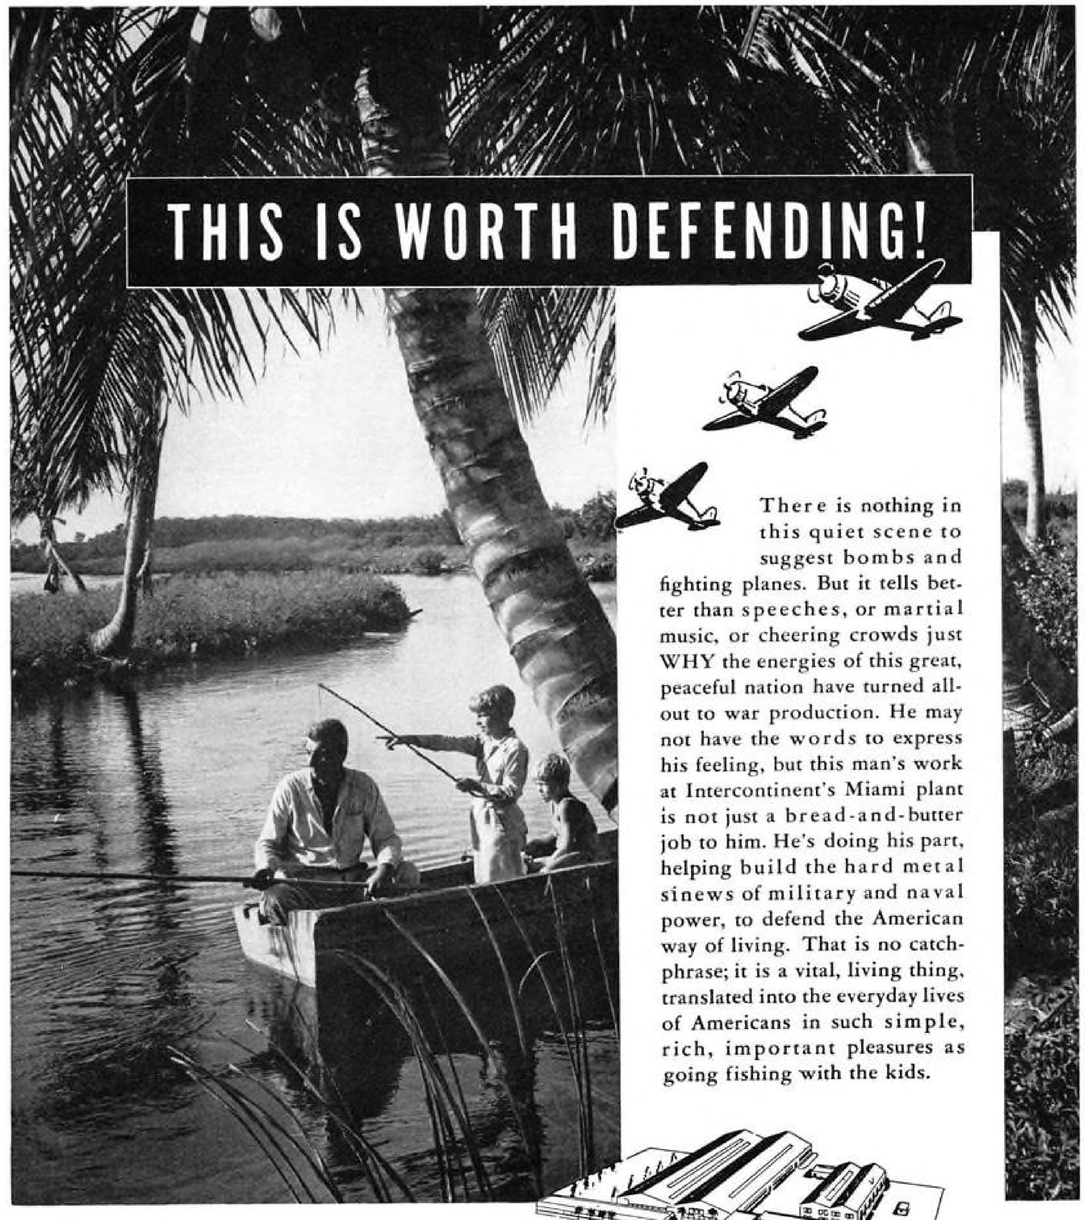

Circuit Breakers

that stay on the Job

Permanently Installed Circuit Breakers Designed to Meet Aircraft Specifications

Klixon Circuit Breakers are permanent protectors that can be reset repeatedly by switch or push-button. They are operated by a snap-acting, scientifically calibrated, thermostatic disc — and are shock-resistant and immune to vibration.

Klixon Circuit Breakers do not trip out on harmless temporary short circuits. But they provide positive protection against maintained short circuits and harmful overloads. Designed for panel mounting . . . small, compact, available with self-locking nuts. It will pay *you* to install this permanent protection, which is being built into more and more military aircraft. Write for complete bulletins.

KLIXON

Spencer Thermostat Co., 12 Forest St., Attleboro, Mass.

MANUFACTURERS OF THERMOSTATS AND TEMPERATURE CONTROLS FOR AIRCRAFT CABINS, RADIOS, ENGINES AND INSTRUMENTS

Klixon NAF-1131 Circuit Breaker.
Approved for military aircraft use. Weighs only 1¼ ounces. Ratings from 5-40 amps in steps of 5.

Klixon PLM-1½″ Circuit Breaker.
Used for higher ratings than the NAF-1131. Compact and light in weight. Ratings range from 35 amperes up. Comes with or without luminous tip on reset button.

Klixon Switch-Type Circuit Breaker—Type C-6363.
Small, compact, and light in weight, this breaker is interchangeable with respect to mounting dimensions with standard aircraft toggle-switch. Ratings from 5-30 amps in steps of 5 Comes with or without luminous tip.

Klixon Switch-Type Circuit Breaker—Type C-6364.
It is light for its size. Being twice the width of the C-6363 it can be mounted in same space as two C-6363's. Ratings range from 35 amps up. Comes with or without luminous tip.

The Curtiss P-40 with SKF-equipped Curtiss Electric Propeller.

More planes and bearings

FROM CURTISS-WRIGHT AND SKF

Sleek airplanes speed from coast to coast. An ever-increasing number of modern and well-armed planes are guarding the air over America . . . hopping the Atlantic and defending the sea lanes. These achievements would not be possible if organizations like Curtiss-Wright and SKF failed to expand their facilities. This is a war of machines, of assembly lines, of production. As long as the crisis lasts, let *every* American responsible for production vow to "Keep 'em flying!"

SKF INDUSTRIES, INC., PHILA., PA.

4944

ROLLER SKF BEARINGS

A Fighting Heart *for the planes in the* Heart of the Fight

★ In the epic life and death struggles raging through European skies with the fate of the world in the balance, the flawless functioning of a plane's electric propeller is absolutely vital.

★ Little wonder then that for the very heart of the propeller's motor, Curtiss Wright depends on AERALLOY Contact Points.

★ Nor is the reason hard to find: Through more than a quarter of a century Wilco has pioneered in the development and micro-precisioning of precious and semi-precious metal parts for industrial use.

★ Not only did Wilco develop the contact material which has proven the most satisfactory to meet the gruelling demands of the modern aircraft magneto, but years before this achievement—Wilco pioneered the contact point which was universally adopted in the mass production of automotive magnetos.

★ Furthermore, AERALLOY contact points have proved their unequalled ability to "take it" in the magnetos of Curtiss built planes, in aircraft used in the world's most historic pioneering flights, and in the Army, the Navy and every major airline in America.

★ Without delay. learn all about AERALLOY Contact Points by writing for the Wilco Blue Book. It also tells in detail why you will prefer Wilco Thermometals—the thermostatic bi-metals for reliable temperature control or reaction from temperature change. Write for your copy today.

THE H. A. WILSON COMPANY
105 Chestnut St., Newark, N. J.
Branches: Chicago ★ Detroit

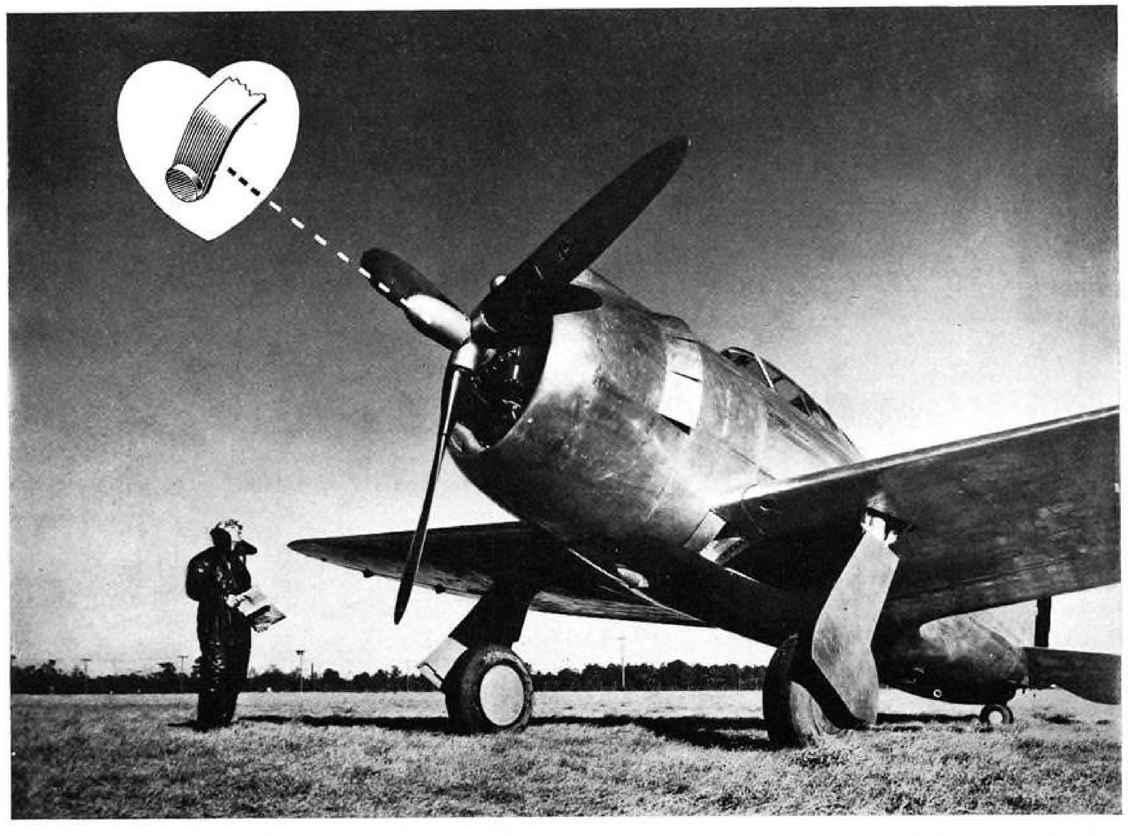

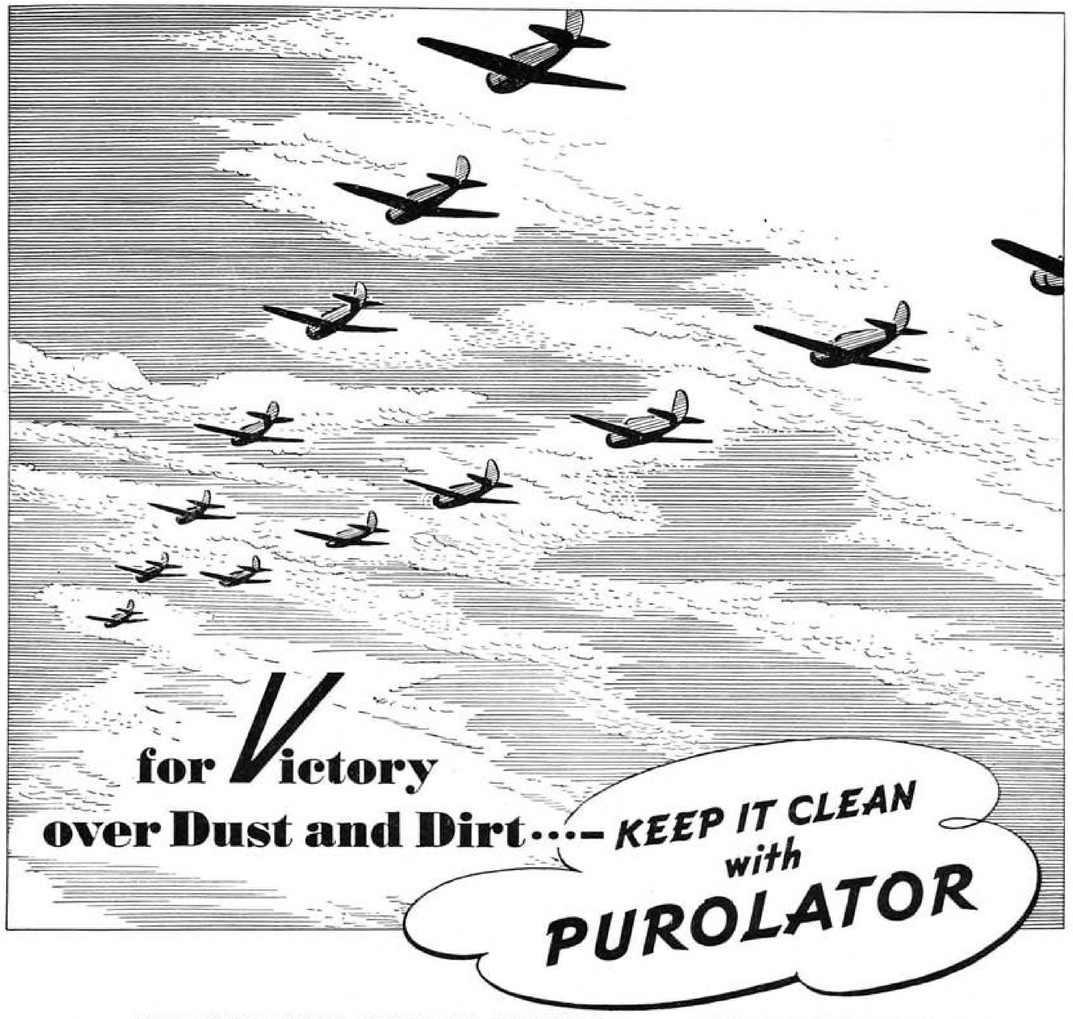

FOR HYDRAULIC CONTROL SYSTEMS
in the 'plane

Used as original equipment by practically all leading airplane builders, the G-159J Purolator is a thoroughly dependable filter for automatic hydraulic systems installed for the operation of wing flaps, gun turrets, retractable landing gear, and other devices. This model will handle 12 g.p.m. of 100 SSU oil at 100° F., with a maximum of 12 lbs. pressure drop. Operating pressures are up to 1500 lbs. Filtering element has a spacing of .003". Weight only 1½ lbs.

The G-160 Purolator is specially developed for use on the suction side of the hand pump in emergency manual controls. It may also be used on the discharge side of the hydraulic pump, handling 1½ g.p.m. at an operating pressure of 1500 lbs.

FOR LUBRICATING OIL
in the plant

Purolator lube oil filters are now widely used to guard against the danger of dirty oil in block tests of aviation engines. Purolator meets this problem, too, with the experience gained in producing the majority of the filter equipment used on gasoline and Diesel engines of all kinds.

PUROLATOR PRODUCTS, INC.
Home Office: Newark, New Jersey • *California Office:* 1401 South Hope Street, Los Angeles

PUROLATOR OIL FILTERS

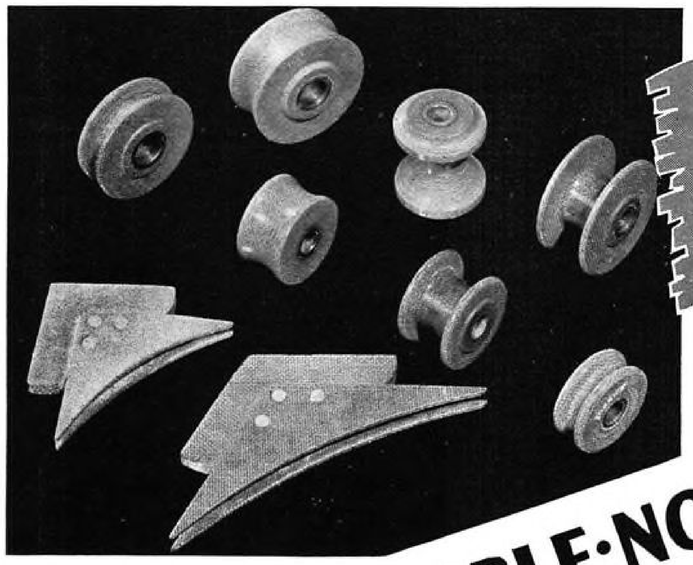

Half The Weight of Aluminum

STRONG·STABLE·NON-METALLIC PARTS for AIRPLANES ...

Low Thermal Expansion

AIRPLANE manufacturers have been finding that Formica is more and more useful to them, and have been specifying it for many more parts every year. They like its light weight, and its stable dimensions which are due to low moisture absorption and a low coefficient of the thermal expansion; they like the fact that it is inert chemically and will not react with the atmosphere to corrode or deteriorate in any way. It is capable of being accurately machined — and maintains its dimensions under extreme variations in conditions.

The very great variety of parts that is now being made by and for the airplane industry is illustrated in a new catalog of "Formica Parts for Airplanes" which we will be glad to send on request. Ask for your copy.

• The Formica Insulation Company
4628 Spring Grove Ave. • Cincinnati, Ohio

FORMICA

★ ★ ★

NICKEL

Practical answers to many questions about the selection, fabrication and uses of Nickel alloys are quickly available to you. This helpful information we have gathered, checked and condensed into convenient printed form. It is useful both to experienced men handling new materials or performing unfamiliar operations... and to new employees. This literature is available upon request. You are also offered the assistance of our technical staff in solving material problems arising from a temporary lack of Nickel. Our engineers are offering timely suggestions to many vital industries during the present emergency. Your request for literature or personal consultation will receive our prompt attention.

THE INTERNATIONAL NICKEL COMPANY, INC. 67 WALL STREET NEW YORK, N. Y.

Does Your DEFENSE JOB Require—

★ Grinding and finishing of internal cylindrical surfaces from .185" to 2.400"?

★ Precision limits within .0001"?

★ Super-smooth surface finish?

If so, you find the answer in

The SUNNEN Model "MA" 4-Speed PRECISION HONING MACHINE

TYPICAL APPLICATIONS IN THE AVIATION INDUSTRY



Airplane engine parts accurately honed to a super-smooth finish.

Aluminum aircraft link "produces high finish without bell-mouthing."

Aircraft valve tappet roller—.0003" stock removal to produce highly polished surface.

Gyroscope balance valve body "saves production time in getting closer limits of accuracy."

In this one simple, practical, inexpensive machine you have the answer to the problem of accurately sizing and finishing internal cylindrical surfaces from .185" to 2.400" in diameter. Many manufacturers engaged in the defense program have said that they are amazed that such a low cost machine can produce such accurate work.

It saves you time in training new workers, too. It doesn't take a skilled machinist to operate the Sunnen Precision Honing Machine. Any intelligent workman with a few hours' practice can produce super-smooth surface finishes and hold accuracy to within .0001".

This machine can be set up and work located in less than one minute. Corrects taper and out-of-round conditions and defects in previous machining operations.

If you have an internal sizing or finishing problem, it will pay you to get complete information today. Write for free 8-page bulletin — or if you prefer, a sales engineer will be glad to call and demonstrate in your shop what this machine will do for you.

SUNNEN

SUNNEN PRODUCTS CO., 7942 Manchester Ave., St. Louis, Mo. — *Canadian Factory:* Chatham, Ont.

SPARK PLUGS IN AVIATION

A MOTION PICTURE COMPLETE WITH SOUND

Seeing and hearing this picture is equal to a trip through the Service Department of The BG Factory. Complete in illustration and narration, it will add to the instructional value of any course in aviation mechanics.

The film will be lent, without charge, to interested Schools and Colleges. Showing time 30 minutes. Can be run in any 16 mm. sound projector.

Address your request to The BG Corporation, 136 West 52nd Street, New York, N.Y.

THE BG CORPORATION

Contractors to the United States Army, Navy and Coast Guard and Aircraft Engine Builders

136 WEST 52nd STREET, NEW YORK, NEW YORK

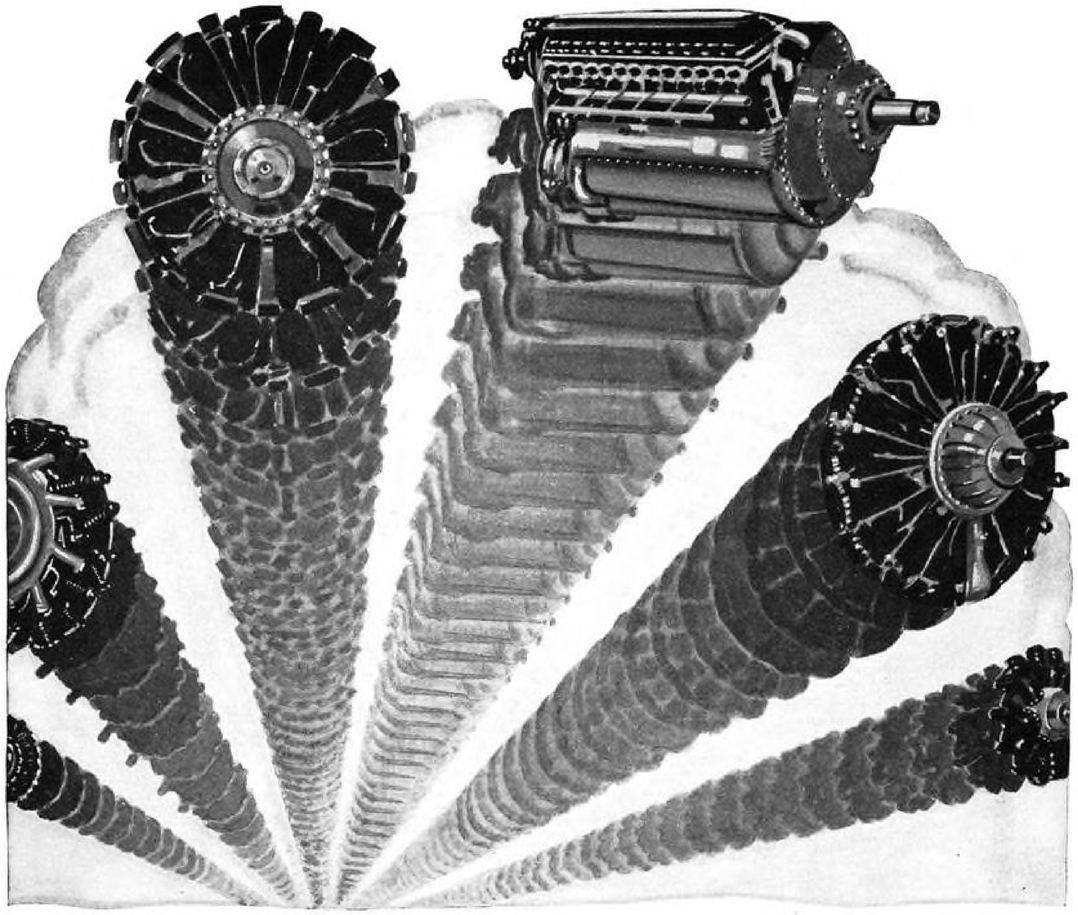

4,760,000 HORSEPOWER

Provided for by Stromberg's October Production!

BETTER than four million horsepower . . . and *better horsepower* . . . than anyone ever flew with before! That was Stromberg's October contribution to the aircraft engine building program.

All of the great aircraft engines of America, which are the backbone of our nation's aviation defense effort, employ Stromberg Injection Carburetion.

This modern method of fuel handling has contributed definitely to flying range, load capacity, maneuverability and safety.

It was developed in the Bendix laboratories, and has been thoroughly service-proved in more than two years of military and commercial use.

Stromberg Injection Carburetion is fully automatic, metering correctly at all flight loads, altitudes, temperatures and attitudes, saving fuel, minimizing icing and assuring maximum engine efficiency.

BENDIX PRODUCTS DIVISION and WAYNE DIVISION
of Bendix Aviation Corporation, South Bend, Indiana

STROMBERG INJECTION CARBURETORS

• This new "Stubby" Plunger Type "D" Micro Switch has an over-travel of 1/16" and operating characteristics particularly adaptable to aircraft—ideally suited to gear head operating motors.

Another NEW MICRO SWITCH

. . . An Addition to the MOST *Complete Line of Precision Switches for Aircraft . . . . .*

Micro Switch scores again. The hardened steel "stubby" plunger of this new Micro Switch provides for a reduction in over-all height of about 20%; operates smoothly when actuated directly from sliding surfaces; reduces the effect of side-thrust to a minimum; and is highly responsive to rapid actuation. The addition of this new switch adds further to the broad scope of dependable service which Micro Switches are rendering the aircraft industry.

New developments are constantly in progress to further assure the industry that the absolute dependability built into each Micro Switch will be maintained and that the very evident preference already shown by aircraft manufacturers will be retained.

Here are shown and briefly described the Micro Switches now being used by leading aircraft manufacturers. New book describing them in detail will soon be available.

Copyright 1941, MicroSwitch Corporation



Army Type Micro Switch. Air Corps Specifications No. 32249. Size 2 1/16" x 1 25/32" x 13/16". Weight, 2.6 oz. Used for cowl gill control and indicator, flap motor limit, gun-firing foot lever, radio antenna reel.



Type M Actuators. for rigidly supporting Micro Switches. For manual or mechanical operation. Size 1 15/16" x 1¾" x 11/16". Available in either ¼" or ⅛" over-travel. Used for landing gear limit, door interlock, control wheel firing switch, and limit for wind tabs, flaps and bomb bay doors.



Micro Air Switch. Over-all size 3 15/16" x 3¼" x 1". Weight, 4.9 oz. Supplied with or without mounting ears; right or left hand. Use: practically universal—"telltale" panels, interlocking safeties, etc.

Metal Clad Micro Switches. Aluminum housings. Size 2½" x 3¼" x 1". Weight, 5 oz. Supplied with synthetic rubber seal, regular or castellated roller plunger. Widely used as a wing flap limit, fire extinguisher, and door switches.

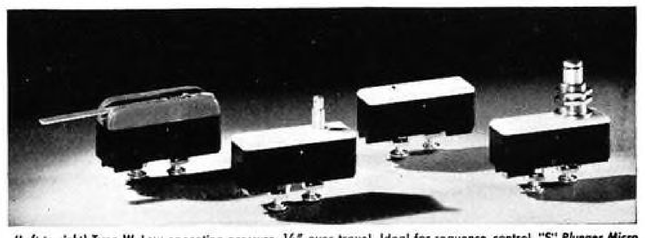

(Left to right) Type W. Low operating pressure, ¼" over-travel. Ideal for sequence control. ***"S" Plunger Micro Switch.*** Widely used as a limit switch. Size 1 15/16" x 1⅜" x 11/16". Weight, 1.2 oz. ***Regular Pin Plunger Micro Switch.*** A general purpose switch for use where no special housing or mounting is required. ***Panel Mount Micro Switch.*** Size 1 15/16" x 1¾" x 11/16". Weight 1.5 oz.

MICRO MS SWITCH

Micro Switch is a trade name indicating manufacture by Micro Switch Corporation

Manufactured in FREEPORT, Illinois, by Micro Switch Corporation. Sales Offices: New York, Chicago, Boston

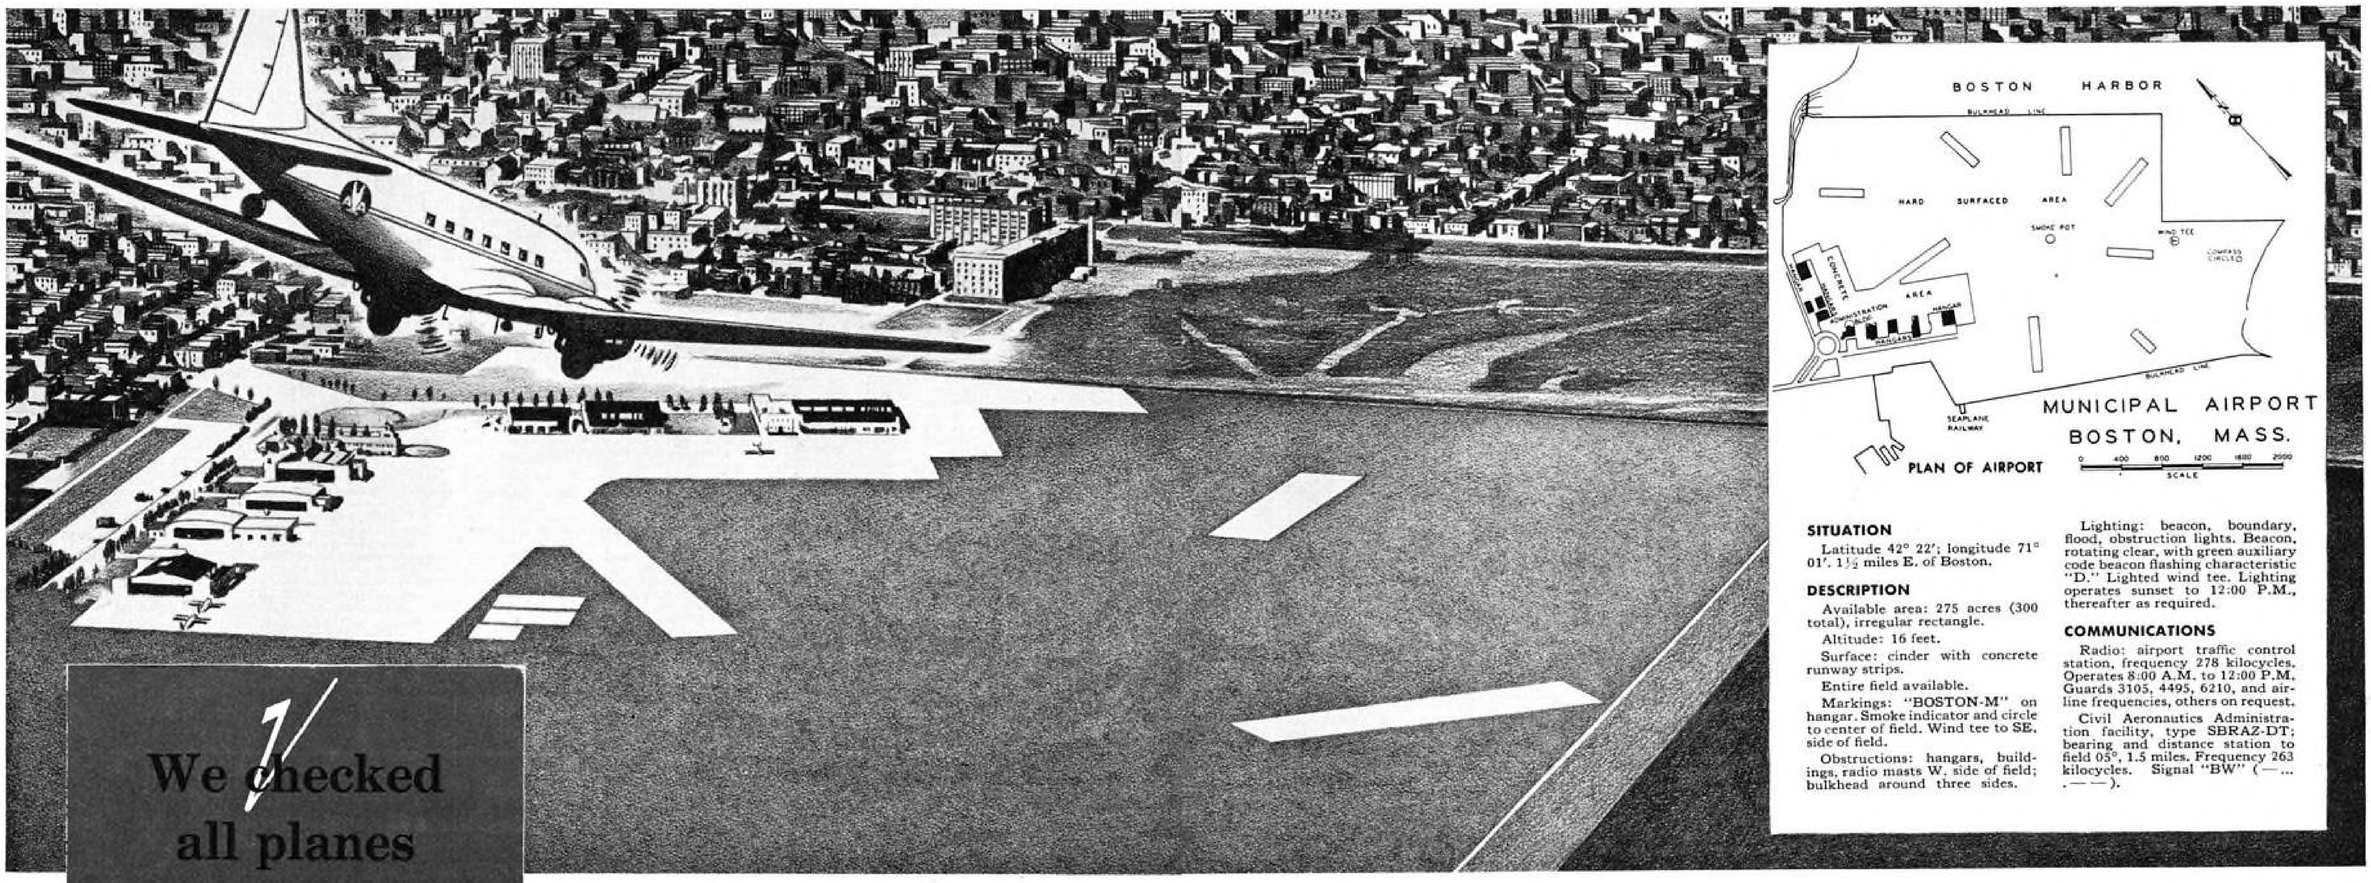

SITUATION

Latitude 42° 22′; longitude 71° 01′. 1½ miles E. of Boston.

DESCRIPTION

Available area: 275 acres (300 total), irregular rectangle.

Altitude: 16 feet.

Surface: cinder with concrete runway strips.

Entire field available.

Markings: "BOSTON-M" on hangar. Smoke indicator and circle to center of field. Wind tee to SE. side of field.

Obstructions: hangars, buildings, radio masts W. side of field; bulkhead around three sides.

Lighting: beacon, boundary, flood, obstruction lights. Beacon, rotating clear, with green auxiliary code beacon flashing characteristic "D." Lighted wind tee. Lighting operates sunset to 12:00 P.M., thereafter as required.

COMMUNICATIONS

Radio: airport traffic control station, frequency 278 kilocycles. Operates 8:00 A.M. to 12:00 P.M. Guards 3105, 4495, 6210, and airline frequencies, others on request.

Civil Aeronautics Administration facility, type SBRAZ-DT; bearing and distance station to field 05°, 1.5 miles. Frequency 263 kilocycles. Signal "BW" (— ... .— —).

We checked all planes landing at BOSTON AIRPORT

8 out of 10

OUT of 2,385 commercial flights to and from Boston Municipal Airport during September 1941 — 1,930 flights (81%) had Cuno Filters installed.

Why Do Engine and Aircraft Builders Concur on Cuno for Fluid Protection?

Longer flights and larger planes . . . efforts to reduce maintenance problems . . . and the desire to safeguard every factor for high-speed and high-altitude flying . . . have led to the widespread adoption of Cuno Filters.

Cuno Pioneering

Cuno engineers pioneered in fluid-cleaning on aircraft services. Originally it was the continuously-cleanable feature of the Cuno Auto-Klean that attracted the industry's attention years ago. Experience proved the Cuno Filter completely dependable, a trouble-free safeguard maintaining efficiency on full flow throughout existence of the installation. Later, a hydraulic motor was developed to make the filter completely automatic.

More recently, other fluid-handling problems... hydraulic controls, glycol cabin heating, etc. . . . have been solved with the help of Cuno engineering — with still further developments for the future now in progress.

Cuno Field Service

Meanwhile, Cuno's service to the industry has become increasingly valuable. On top of creative engineering on the filter and aid to aircraft designers (especially on built-in applications), our field service follows the installations through *operation*. We assume the responsibility of familiarizing aircraft *maintenance* men with this fluid-cleaning method.

have CUNO FILTRATION

When, in your work, you think of fluids, think of Cuno — the company that safeguards the fluids that safeguard flight.

KEEP FLOW ON "GO" WITH

CUNO

THE "FILTER-FINE" STRAINER

American Airlines, eager to improve maintenance, appreciates Cuno efficiency

The compact Cuno Filter built into the Wright Cyclone engines of American's Flagship Fleet does not require periodic replacement. The cleaner blades, extending into each slot of the rotating element, *comb* out imbedded solids — thoroughly restoring the free area, not just scraping off the surface. This is vital on lubrication services — there's no sludge accumulation *inside* the filter element, no danger of the filter collapsing, with station service reduced to a minimum.

CUNO ENGINEERING CORPORATION, MERIDEN, CONN.

TORRINGTON NEEDLE BEARINGS SIMPLIFY DESIGN SPEED ASSEMBLY AND WITHSTAND STRAINS IN MEYERS TRAINERS

1 MEYERS OTW TRAINER is used for advanced instruction—almost exclusively in acrobatics—by Civilian Pilot Training Program operators. To withstand the severe strains imposed by stunt flying, Torrington Needle Bearings are used in the controls of Meyers planes.

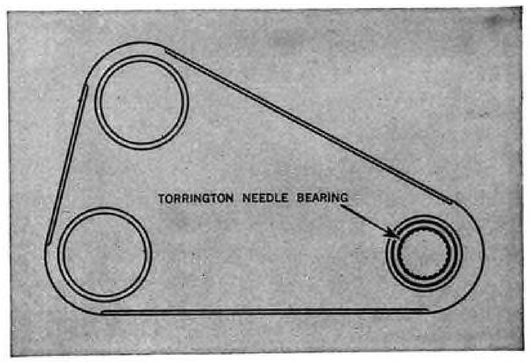

2 AILERON CONTROL is dependent on Torrington Needle Bearing. According to Meyers Aircraft Company engineers, "Use of the Needle Bearing helps to assure constant alignment, reduces any possibility of jamming, and maintains a low coefficient of friction throughout its long life."

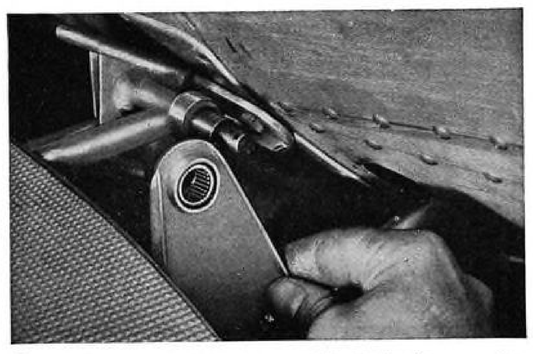

3 THE SMALL SIZE of Torrington Needle Bearings permits important savings in dimensions, weight and cost of the surrounding assembly. They have high load capacity, yet require no more space than plain bushings, thus allowing simplification of design. Lubrication, moreover, is no problem, because Needle Bearings store large supplies of lubricant.

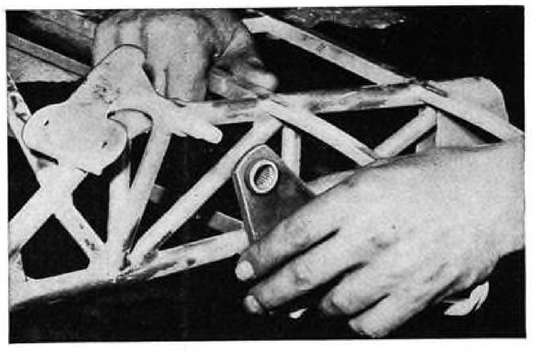

4 ASSEMBLY TIME is reduced "because control bellcrank, enclosing Needle Bearing, is easily slid onto shaft." And being self-contained units, made to accurate dimensions, Needle Bearings are quickly installed in housing, or, reports Meyers Aircraft, "If the occasion ever arises, they may be replaced rapidly without special tools."

If you have a bearing problem where high load capacity, small size, light weight, ease of assembly and lubrication are important, investigate the advantages of the Torrington Needle Bearing. Our Engineering Department will be glad to work with you in adapting them to your assemblies. For details write for Catalog No. 114. For Needle Bearings to be used in heavier service, consult our Engineering Department for special bearing designs.

THE TORRINGTON COMPANY, TORRINGTON, CONN., U. S. A. • ESTABLISHED 1866

Makers of Needle and Ball Bearings

New York Boston Philadelphia Detroit Cleveland Chicago London, England

TORRINGTON NEEDLE BEARING

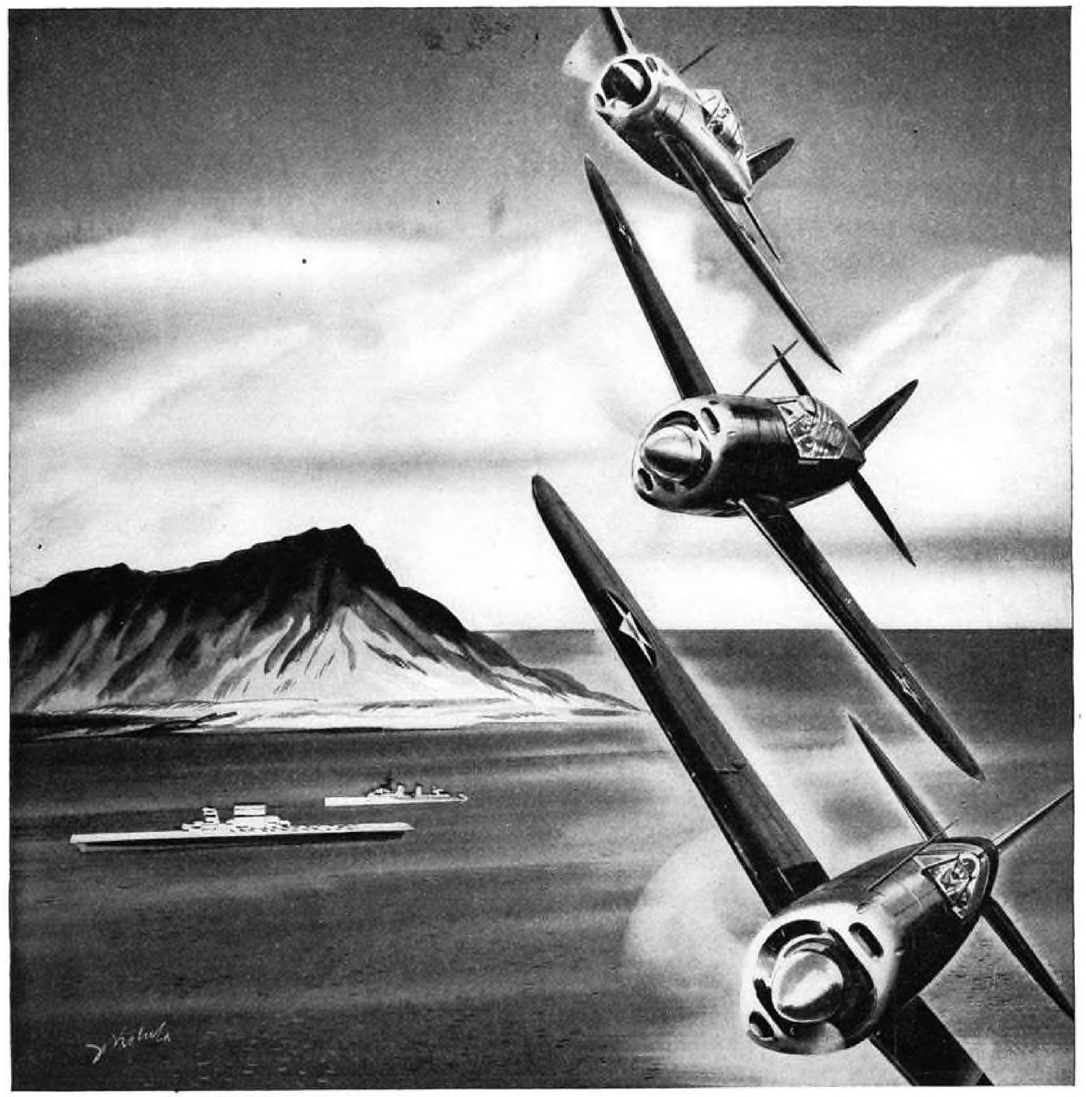

Wings over Waikiki

CARRIER-BASED off Diamond Head with strong units of the United States Navy, formations of fast, hard-hitting Brewster Buffalo shipboard fighters guard the Pacific outposts of America's possessions. In the Far East, squadrons of Buffalos are now serving Great Britain and the Netherlands East Indies at Singapore and Batavia. Soon to be added to the present strength of these aerial armadas is the tremendous striking power of the Brewster Buccaneer and Bermuda, long-range dive-bombers now in production.

FOR LASTING MASTERY OF THE AIR

Brewster

FIGHTERS AND DIVE BOMBERS

LONG ISLAND CITY, N. Y. • NEWARK, N. J. • JOHNSVILLE, PA.

Tannewitz
HIGH SPEED BAND SAWS

A far faster means of cutting

SHEET STEEL

NON-FERROUS METALS

PLASTICS, ETC.

[See Chart Below]

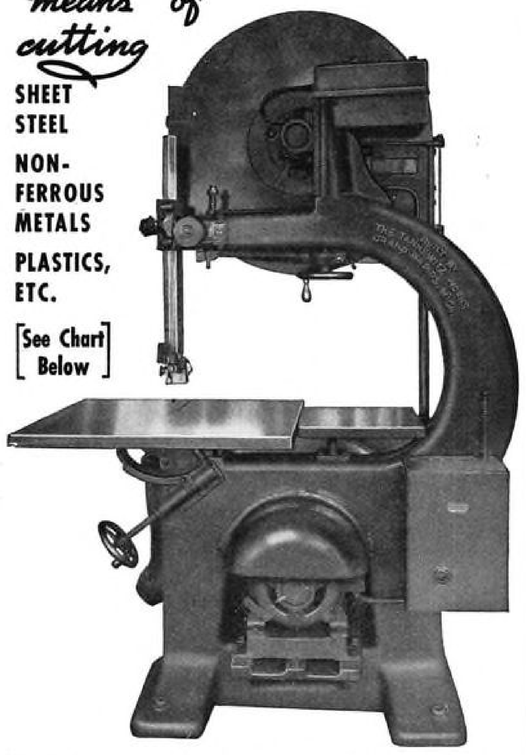

These superb machines, built to deliver any speed up to two miles of saw blade travel per minute without vibration, are doing hundreds of metal-cutting and other jobs in a fraction of the time previously required, in plants throughout the aviation industry. To increase production and make important savings in costs by all means investigate them, at once. A line requesting Metal Cutting Band Saw Bulletin will bring you the complete facts promptly.

PERFECTLY SAFE: Two-Wheel Lockheed Hydraulic Brakes automatically and instantly stop the wheels in case of saw blade breakage—completely guarded.

Thickness and speed for sawing in feet

KIND OF MATERIAL	1/32	1/16	1/8	1/4	1/2	1	2	3
Mild Steel	12-24	6	3	1				
Stainless Steel	6	2	1					
Yellow Brass, Zinc	24	12	6	3	1½	¾	⅜	3/16
Bronze or Copper	6	3	1½	¾	⅜	3/16		
Aluminum	24-36	18	9	4½	2	1½	1	¾
Duraluminum	24	12	6	3	1½	1	½	¼
Sinale Plymetal				6	4			
Double Plymetal				4	3			
Plywood	24-36	24	20	16	12	6	3	1½
Asbestos Board	12	6	3	1½	¾			
Fibre (Hard)	24	12	6	¾				
Paper Board	24	18	12	4	2	½		
Masonite	24	18	12	6	3	1½	¾	⅜
Bakelite	12	6	3	1½	¾	⅜	3/16	

MANY HIGHLY DEVELOPED, PATENTED FEATURES found in no other band saws are incorporated in TANNEWITZ HIGH SPEED BAND SAWS.

Built by Sawing Machinery Specialists

THE TANNEWITZ WORKS, GRAND RAPIDS, MICH.

BUSINESS AS USUAL

In the months ahead, with the demand for Packard aircraft cable steadily increasing, Packard will continue producing fine electrical cable for all aircraft needs—as usual!

Packard
REG. U.S. PAT. OFF.
TRADE MARK

PACKARD ELECTRIC DIVISION
General Motors Corporation, Warren, Ohio

STUDENTS LEARN *FAST* WITH WACOS

Student fliers get the "feel of a Waco" quickly. Its easy maneuvering in the air and on the ground gives the students confidence. The Waco's record for stability in the daily grind of acrobatics assures the maximum in safety. There are well over 400 Waco UPF-7's now in service in the advanced courses of the Civilian Pilot Training Program which has already supplied more than 12,000 pilots and instructors to the armed forces of the U. S. A. Low maintenance and simple service requirements give the Waco more hours in the air, less time on the ground . . . that's why we say: "When you are considering the purchase of a trainer, ASK ANY PILOT about the Waco." The Waco Aircraft Company, Troy, Ohio, U.S.A.

The Waco UPF-7 owned by the Branson Flying Service, Meramec Airport, Kirkwood, Missouri, is used for secondary training and has had over 1,000 hours in the air without one cent spent for repairs. Ray Branson says, "For this type of training, the Waco has no equal."

WACO AIRPLANES

THE WACO AIRCRAFT COMPANY • TROY, OHIO • U. S. A.

Use G-E Fiberduct

FOR POWER DISTRIBUTION

IN FACTORIES
•
HANGARS
•
ADMINISTRATION BUILDINGS
•
MACHINE SHOPS



FIBERDUCT CAN BE LAID OUT TO SUIT THE NEEDS OF THE BUILDING. ABOVE IS TYPICAL FACTORY LAYOUT

Fiberduct underfloor raceways will make power conveniently available everywhere. These raceways can be tapped at any time for electrical connections. You are sure to be pleased with the flexibility Fiberduct underfloor raceways give.

Outlets can be preset at the factory or set when the Fiberduct is installed or set at any later time. Ducts can be installed for power, for lighting or for signal systems.

Fiberduct is made of non-corrodible fiber and is moisture resistant and high in mechanical strength. It can be installed easily and quickly.

For further information about Fiberduct and the ways in which it can be installed see the nearest G-E Merchandise Distributor or mail the coupon for a G-E Fiberduct combined catalog and manual.

GENERAL ELECTRIC

General Electric Company, Section C-184B
Appliance and Merchandise Dept.
Bridgeport, Conn.

Sirs: Please send me the G-E Fiberduct combined catalog and manual.

Name.....

Address.....

City.....*State*.....

★ *A heat-treated aluminum airplane wheel.*

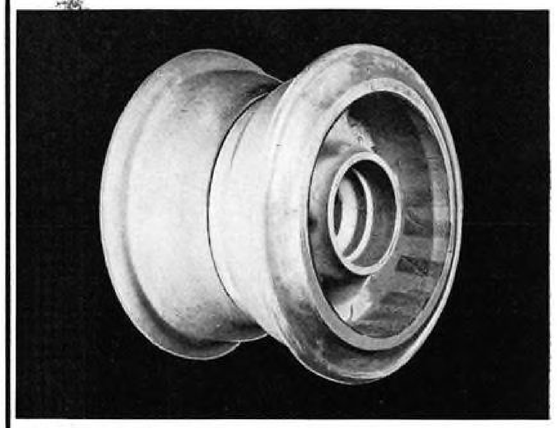

5 *Profitable Reasons*

FOR ORDERING YOUR CASTINGS FROM WELLMAN

MANY prominent aircraft firms are ordering magnesium and heat-treated aluminum castings from Wellman, because Wellman Service offers these adavntages:

1. PROMPT DELIVERIES Our entire organization, including personnel, equipment and plant capacity is geared up to meet exacting schedules.
2. ADEQUATE FACILITIES A new modern plant offers 40,000 sq. ft. of additional capacity. Also, our older plant has been streamlined for faster production.
3. PRECISION QUALITY Wellman castings have the fine degree of accuracy required for aviation work, if necessary, within + or — 1/64".
4. EXPERIENCED PERSONNEL Our employees have a background of 30 years in brass and aluminum, and 10 years in magnesium.
5. QUALITY CHECKING The quality of Wellman castings is rigidly tested by laboratories, X-ray apparatus and other facilities.

Avail yourself of these important advantages by sending your blueprints now for quotation.

THE WELLMAN BRONZE AND ALUMINUM CO.
6002 Superior Ave. Cleveland, Ohio
★

LYON
SHOP AND STORAGE EQUIPMENT

SPEEDS

VITAL NATIONAL DEFENSE PRODUCTION

● Manufacturers of all types of Defense Products are finding Lyon Shop, Storage and Toolroom Equipment major aids in meeting *or bettering* "impossible" production schedules. By providing more orderly storage, and accelerating the handling of tools and materials, these industry-proved units permit maximum use of minimum inventory . . . conserve floor area . . . make every available die and small tool more productive.

If your defense projects involve sub-contracting of units or parts of units fabricated from heavy and medium gauge sheet metal, investigate the unusual facilities available for such work in our two large, modern plants. Illustrated brochure, "CRAFTSMEN IN NATIONAL DEFENSE" describes these facilities in detail.

LYON METAL PRODUCTS, INCORPORATED
General Offices: 5812 Madison Ave., Aurora, Ill.
Branches and Distributors in All Principal Cities

Aircraft: Pictured here is one of the many applications of Lyon Steel Shop Equipment that has helped aircraft manufacturers solve urgent and complex storage and material handling problems. Lyon Equipment is serving practically every major manufacturer of aircraft and aircraft motors in America.

Shipyards: In 18 leading shipyards Lyon Steel Storage and Shop Equipment is making possible faster handling of tools and materials. Strength, flexibility and space-saving design are major factors in the preference shown for Lyon Products by operators in this field.

Tanks: As manufacturers divert production facilities to vital defense equipment, they have turned to Lyon not only for increased amounts of the Storage and Shop Equipment used successfully for many years, but for engineering co-operation in the layout of stockrooms, toolrooms, etc., for new plants, and in solving new storage and stock handling problems.

NON-ENGINEERED DEFENSE PRODUCTS SOLD BY LYON DISTRIBUTORS

Ordnance: Arsenals and power plants —they are faced with the same common problems of SPEED. In each case, LYON Equipment is helping provide that vital speed . . . and has been readily adapted to each plant's individual requirement.

LYON *Service*
SHOP EQUIPMENT

★★★ • TO SPEED PRODUCTION FOR THE ARSENAL OF DEMOCRACY

ACTUS Hi-Pressure Hose Clamps of stainless steel are designed for *quick-action installation. A single clamp fits any size hose* and may be installed before or after assembly. Meeting all U. S. specifications, ACTUS Hose Clamps are used by the U. S. Navy and Coast Guard, the Canadian Government and many of our principal aircraft and engine manufacturers. Write for facts.

ACTUS PRODUCTS CORP.

Mount Vernon, N. Y.

FOR *Laying-Out and Inspection* OF JIGS, FIXTURES, ETC.

South Bend CAST IRON SURFACE PLATES



ADJUSTABLE BLOCKS

Five blocks, either size, furnished with each plate for firm yet adjustable support. (1½ inch adjustment.) Fine thread for "vernier" adjustment.

Write Now!

Ask the price—and approximate shipping date—of this useful and convenient item. Also inquire about your tooling problems in general. We offer a complete tool, jig, fixture and die service.

Formerly made only for our own use, now available for manufacturers, machine shops and large tool rooms. Made with "professional" skill by *master toolmakers,* finished to best toolroom practice. Choice of *seven* support points provides flexibility of use for all shop needs. *Five* legs or blocks furnished with each plate. South Bend Tool & Die Company, 1912 South Main Street, South Bend, Indiana.

SOUTH BEND TOOL & DIE CO.

TURCO

NAA

WE ARE PROUD TO SERVE IN THE BATTLE OF PRODUCTION!

Working closely wtih the production men of practically every aircraft manufacturer, Turco Service Engineers have learned the best ways to handle all types of industrial cleaning. These short cuts to efficient production are available to you.

TURCO IS PROUD TO SERVE *YOU* PERSONALLY IN CONNECTION WITH THESE OPERATIONS:

ALUMINUM SPOT WELDING	ANODIZING
CADMIUM PLATING	ACID PICKLING
CLEANING BEFORE PROCESSING	CHROMATIZING
MAINTENANCE AND OVERHAUL	MAGNESIUM PROCESSING
PHOSPHATIZING	PAINT DEPARTMENT MAINTENANCE
PAINT STRIPPING	PAINT CLEANING CAMOUFLAGE
ENGINE CLEANING	PLANT MAINTENANCE
WELDING FLUX REMOVAL	STAINLESS STEEL PROCESSING

AND IN ALL OTHER OPERATIONS INVOLVING ANY ASPECT OF CLEANING

WRITE and tell us which of the subjects above interest you and we'll send you some worth-your-time literature with no obligation on your part. With this increased knowledge, you can give your company top perfection in industrial cleaning—and have the personal satisfaction of knowing that the few extra minutes you take to study new, modern methods will be productive of time-saving, profitable results. SUGGESTION: Just write your name and address on the margin and check the operations in which you're interested. We'll do the rest!

TURCO PRODUCTS, INC.

6135 SOUTH CENTRAL AVENUE
LOS ANGELES, CALIFORNIA

WAREHOUSES AND SERVICE OFFICES THRUOUT THE NATION

Aero ITI-Trained Men Are *Upgraded* IN ADVANCE

In picturing phases of instruction not ordinarily found, or covered thoroughly, in private aircraft school courses these photographs indicate how thorough and extensive is the training given by Aero ITI to supply the industry with better qualified personnel.

Personnel department executives—and all other executives concerned with employee selection—can employ the Aero ITI-trained man assured of his upgrading already being well along. This continues to be demonstrated time and again by the many graduates of this school already securely established in the industry. It is the rule that the Aero ITI-trained man soon demonstrates ability beyond his starting job. Numerous are the cases of early transfer and advancement to junior inspection, power plant installation, instrument installation, experimental . . . and even such highly specialized work as time and motion study. Men so trained are being requested of this school in far greater numbers than possible to supply. . . but Aero ITI looks ahead with the industry to building the nucleus of supervisory personnel needed in the still greater future ahead.

AERO INDUSTRIES TECHNICAL INSTITUTE

5261 WEST SAN FERNANDO ROAD, LOS ANGELES, CALIFORNIA

***Five Courses In AIRCRAFT MECHANICS and AERONAUTICAL ENGINEERING*—Including 12 Month Aircraft Mechanics Course**
Approved by U. S. Civil Aeronautics Administration

ADVISORY BOARD

ROBERT E. GROSS — *President, Lockheed Aircraft Corporation*
JOHN K. NORTHROP — *President, Northrop Aircraft, Inc.*
C. A. VAN DUSEN — *Vice-Pres., Consolidated Aircraft Corporation*

THE PROOF OF THE PUDDING!

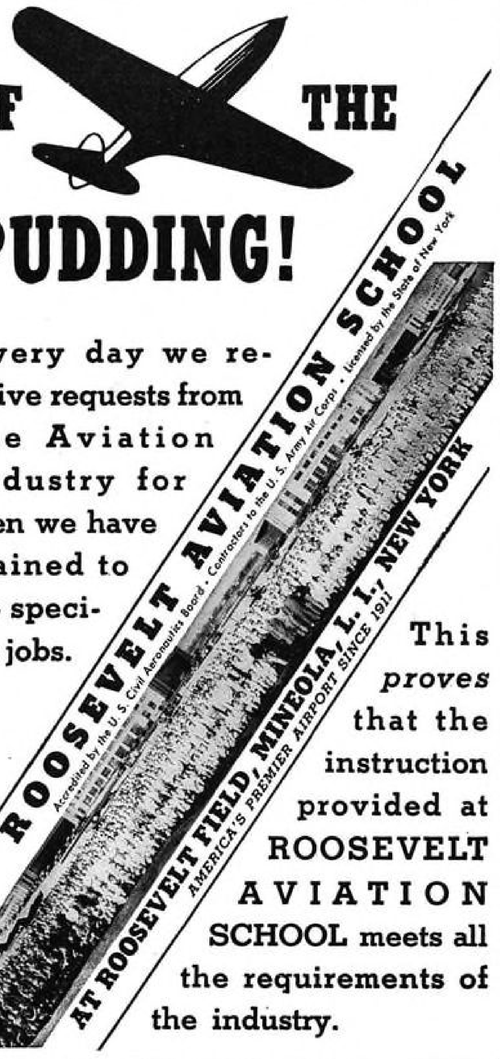

Every day we receive requests from the Aviation Industry for men we have trained to do specific jobs.

This *proves* that the instruction provided at ROOSEVELT AVIATION SCHOOL meets all the requirements of the industry.

WINTER CLASSES START JANUARY 5, 1942

AVIATION TRAINING AT ITS BEST

.....SIGN AND MAIL COUPON TODAY.....

ROOSEVELT AVIATION SCHOOL
at Roosevelt Field, Mineola, Long Island, N. Y.

Without obligating me, send details of course checked:

☐ COMMERCIAL PILOT ☐ COMBINATION FLIGHT-MECHANIC
☐ PRIVATE PILOT ☐ MASTER AIRPLANE & ENGINE MECHANIC

Name.....*Age*.....

Street Address.....

Town.....*State*.....

A. DEC. 1941

WELDWOOD

. . . *the GLUE of the Aviation Industry*

WELDWOOD PLASTIC RESIN GLUE has been approved for aircraft by the United States Navy, United States Army and the Civil Aeronautics Administration when properly applied* . . . endorsed and used by America's leading manufacturers of aircraft and aircraft parts.

WELDWOOD GLUE is a cold setting, one-part plastic that requires no heat or hardener. It mixes instantly with tap water—ready for immediate use. Upon setting up, WELDWOOD GLUE becomes Waterproof, Stain-free, Rot-proof and Enduring.

*Sample can of WELDWOOD GLUE, test report and process specifications are available on requests made on firm letterheads.

The USP Research Laboratories are at customers' disposal in reference to special glueing problems.

UNITED STATES PLYWOOD CORP.
World's largest producers of Plywood
616 West 46th Street, New York, N. Y.

WELDWOOD
PLASTIC RESIN
WATERPROOF GLUE

Anything in Fabric

BLIND FLYING HOODS
ENGINE COVERS
LANDING GEAR, TAIL WHEEL AND STICK BOOTS
FUME PROOF SLEEVES
HUB COVERS
CUSHIONS
CRASH PADS
FLOOR COVERINGS
SEATS
LIFE PRESERVER CUSHIONS

FOR AVIATION USE

ANYTHING OF FABRIC
COCKPIT ROLLS
COWL PADS
STRAPS
PAD ASSEMBLY HEAD RESTS
CORD ASSEMBLIES
WING COVERS
FUSELAGE COVERS
CONTAINER ASSEMBLIES
FLEXIBLE GUN HEAD
CUSHIONS
GUN BLAST BOOTS

Contact!

No matter what you want, in this classification, in fabric or leather, contact us—we produce the highest quality work only.

L. POTTER, INC.
BETHPAGE, L. I., N. Y.

Telephone
HICKSVILLE 233

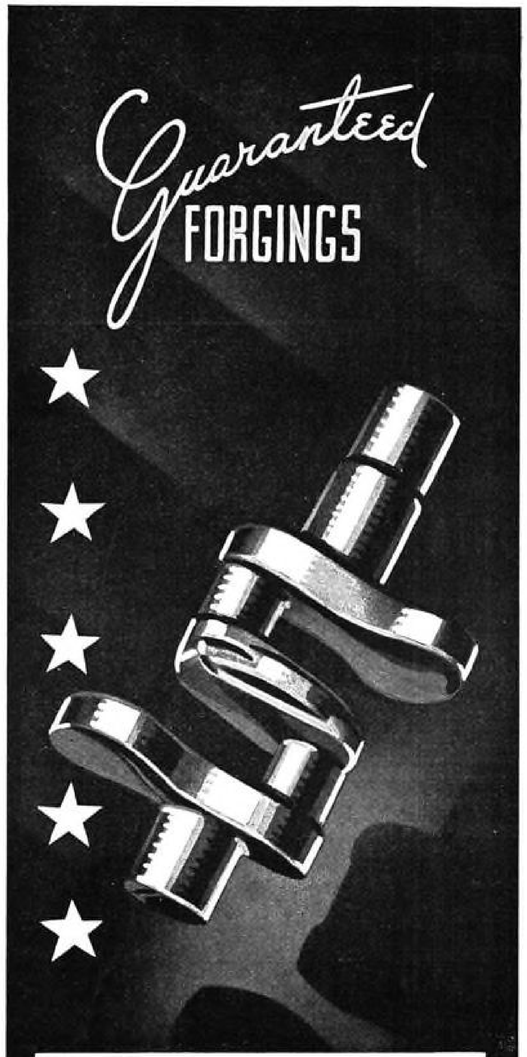

The first aviation crankshafts were forged by Wyman-Gordon. Down through the years, with the marvelous advance of the industry, every Wyman-Gordon forging has been made under the rule that nothing but the best should go in the air.

WYMAN-GORDON

Worcester, Mass. Harvey, Illinois
Detroit, Mich.

aircraft instruments . . .

how to use them
how to test them
how to repair them
how to install them

All who are in any way concerned with aircraft instruments will find this the one complete, practical manual on the subject. The book describes in detail all types of aircraft instruments—engine, navigation and flight—and makes plain the fundamentals of their construction and operation. It gives further complete methods for installation, use, testing, trouble-finding and repair.

Just Out!

AIRCRAFT INSTRUMENTS

By George E. Irvin

525 pages, 545 illustrations. $5.00

THE full and explicit treatment presented in this book is in accordance throughout with manufacturers' recommended methods and airlines' procedures for all operations covered, and includes copyrighted information from these sources as well as working charts, formulas, tables, trouble-finding lists, etc., not heretofore available in a single book.

Answers your questions on:—

meteorological instruments
pressure gauges
thermometers
manifold pressure gauges
tachometers and synchronizers
fuel quantity gauges
remote indicating systems
compasses
octants
directional gyro
air-speed indicators
rate-of-climb indicators
altimeters
etc., etc.

MAIL THIS COUPON

McGRAW-HILL ON-APPROVAL COUPON

McGRAW-HILL BOOK COMPANY, INC.
330 West 42nd Street, New York, N. Y.

Send me for 10 days' examination, subject to approval or return, Irvin's Aircraft Instruments. At the end of 10 days I agree to pay $5.00 plus a few cents for postage and delivery, or return the book postpaid. (We pay postage on orders accompanied by remittance.)

Name .....

Address .....

City and State .....

Position .....

Company .....AV. 12-41

(Books sent on approval in U. S. and Canada only.)

Famous Airplanes Solar Equipped — Fifth Advertisement of series

CARBURIZING and ANNEALING BOXES WITH ⅓ THE WEIGHT and Equal Satisfactory Service



ANNEALING AND HEAT TREATING BASKET

(shown at left) is six feet in diameter and six feet high. Adjustable shelves and sides. Made to your specifications.

PICKLING, DIPPING AND ANNEALING BASKETS

(lower left) can be furnished in any size with perforations to suit your requirements.

A TUBE ASSEMBLY

(upper right) used as a preheater for heating gas and air. The unit is eight feet three inches long, five feet wide. Tube ends are threaded.

PICKLING RACK

(right) it is thirteen feet long, 24 inches deep and forty-eight inches wide with a capacity of ten thousand tons.

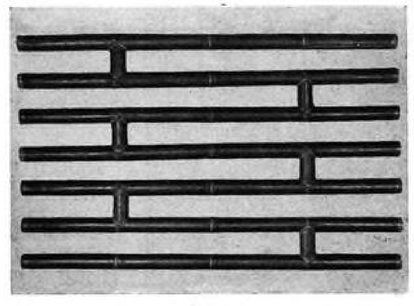

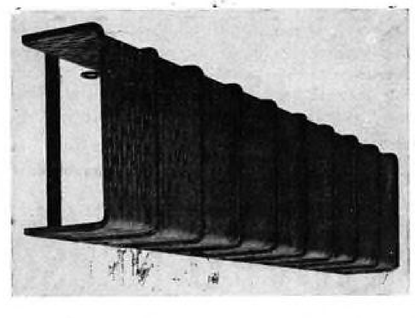

The PRESSED STEEL CO. of Wilkes-Barre, Pa.

Built with a world of care—
Backed by a world of experience
BENDIX-SCINTILLA

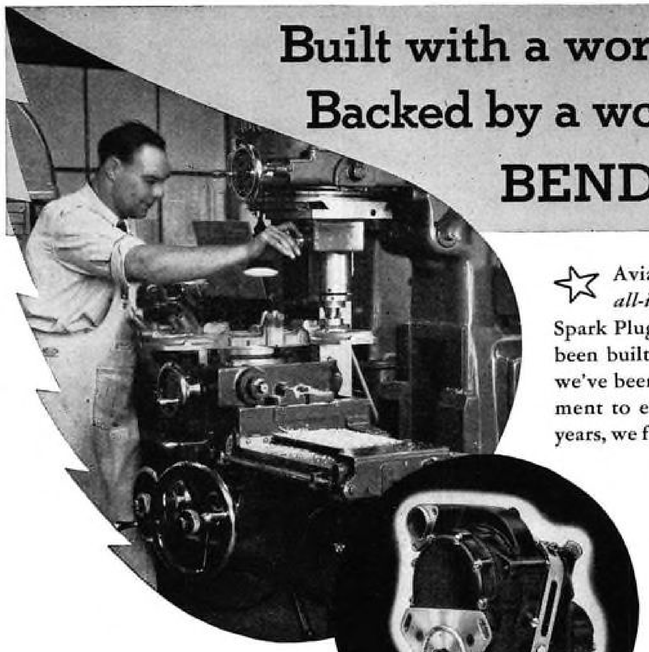

☆ Aviation is one field where care and precision are *all-important.* Bendix-Scintilla Aircraft Magnetos, Spark Plugs, Switches and Radio Shielding have always been built with that idea uppermost in mind. And since we've been at this business of supplying ignition equipment to every branch of American aviation for many years, we feel that we can say with assurance that—Bendix-Scintilla products are *built with a world of care and backed by a world of experience.* We believe that knowledge is a source of confidence for men who fly—especially these days, when American air supremacy means so much.

SCINTILLA MAGNETO DIVISION
BENDIX AVIATION CORPORATION, SIDNEY, N. Y.

The world's finest aircraft ignition

BENDIX SCINTILLA

Machining to Superfine Tolerances

Machining of aircraft and automotive engine parts to superfine precision clearances is the one thing in which we specialize and also excel—due in no small measure to the fact that the majority of our personnel of highly skilled men has been with Govro-Nelson continuously for a period of 10 to 15 years.

• *Write Us Concerning Your Requirements!*

THE
GOVRO-NELSON
COMPANY
1931 Antoinette Detroit, Mich.

DARNELL CASTERS
Give Many More Years of SERVICE ••

Free DARNELL MANUAL

DARNELL *Corporation, Ltd.*
LONG BEACH, CALIFORNIA
36 N. CLINTON ST., CHICAGO, ILL.
60 WALKER ST., NEW YORK N. Y.

MAINSTAYS OF MAINTENANCE

Going after a nut way up in the innards? Trust a long, thin, tough "Superrench" to get it. . . . Have to tighten a cylinder head to equal tension? Leave it to a "Measurrench". . . . Stuck with a frozen bolt in a tight spot? Count on a "Superratchet" and a "Supersocket" to thaw it loose. . . . Making a delicate electrical adjustment? Depend on a set of Midget "Superrenches" for hair-breadth control. Whatever the maintenance job, there's a trustworthy Williams' Wrench or Set to do it quicker, better. Write for catalog of many sizes and styles.

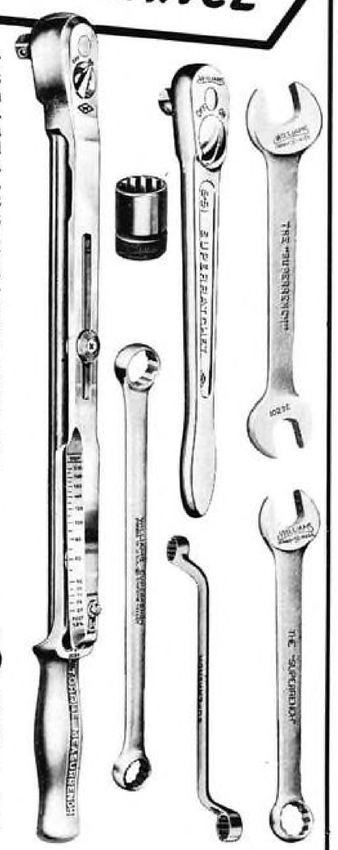

LET'S GO! U.S.A. KEEP 'EM FLYING!

WITH WILLIAMS
AVIATION
SUPERRENCHES
SUPERSOCKETS
J. H. WILLIAMS & CO.
"The Wrench People"
225 Lafayette St., New York
Western Office and Warehouse, Chicago • Works: Buffalo

TOOL HOLDERS • LATHE DOGS • "C" CLAMPS • WRENCHES

DROP-FORGINGS OF SPECIAL DESIGN MADE TO ORDER

IN NORTHROP PATROL BOMBERS

CORROSION RESISTANT
AMPCOLOY
FOR PEDESTAL ATTACHING

Attaching float to pedestal on Northrop N-3PB

THE pedestal attaching fittings on Northrop Patrol Bombers are made from Ampcoloy 66, a high tensile bronze of controlled analysis. Contact with salt water and flying spray made corrosion-resistant fittings imperative, and, once again, top aircraft designing engineers chose an Ampco-made bronze.

There is a reason why over thirty-three different makes of aircraft are Ampco-equipped today. The high physical properties of Ampco bronzes — their stubborn resistance to wear, impact, and failure — their controlled hardness and high tensile strength — all combine to make them important in aircraft construction.

Ampco bronzes are used in propellers, engines, retractable landing gear, and other aviation equipment. Ask our engineers how Ampco Metal will help improve your construction. "Ampco Metal in Aircraft" will be sent upon request.

AMPCO METAL, INC • Milwaukee, Wis.

LET'S GO! U.S.A. KEEP 'EM FLYING!

AMPCO METAL
The Metal Without An Equal

CHAUER IDEAL Speed Lathes

for FASTER WORK
• • • PRODUCTION
• • • RECONDITIONING

For speedier, more economical finishing of small metal and plastic parts.

● **IDEAL SPEED LATHE**

Equipped with single or 2-speed motor; exclusive, automatic brake; spring-type, hand (or foot) operated collet, step chuck, or expanding mandrels.

● **VARIABLE SPEED LATHE**

With infinite selection of spindle speeds, between 25 and 4200 R.P.M. (ratio of 6½ to 1 with single speed and 13 to 1 with 2-speed motor).

We design special lathes to meet individual requirements.

WRITE FOR CIRCULAR NO. 400

SCHAUER MACHINE CO.
2057 Reading Rd. Cincinnati, Ohio

AIRCRAFT
STEELS
IN STOCK
FOR IMMEDIATE SHIPMENT

BARS
ROUNDS • HEXAGONS • SQUARES
STRIP • SPRING STEELS

All Sizes . . . All Analyses

Electric furnace Aircraft Quality steels . . . subject to Magnaflux test . . . conform to Army and Navy specifications . . . cold drawn and annealed, or heat treated. *Send for Stock List.*

CONTROLLED STEELS

THE HAMILTON STEEL COMPANY
TAFT AVE. AT EAST 131st STREET
LIBERTY 2800 · CLEVELAND, OHIO

How to Increase Production for 1c a week per worker

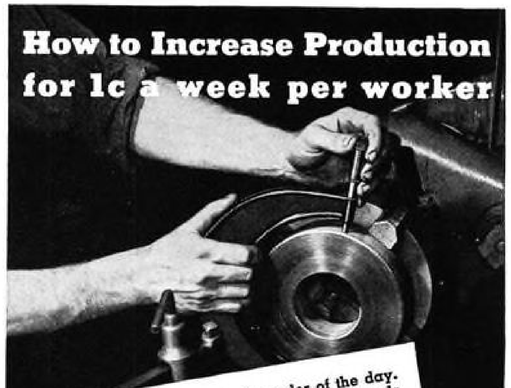

Top speed production is the order of the day. Step up the efficiency of your workers' hands with Formula SBS-11 the safe, industrial skin cleanser, and you automatically step up each workers' productivity. Formula SBS-11 quickly, easily, and safely removes grease and grime; helps prevent dermatitis and skin infection. **FREE TRIAL:** Test Formula SBS-11 in your plant at our expense. Write today for free trial supply to Sugar Beet Products Co., 315 Waller St., Saginaw, Michigan.

Formula SBS-II THE WASHWORD OF INDUSTRY

DRAKE



Check **THE IMPROVED FEATURES OF THIS BETTER PANEL LIGHT ASSEMBLY**

1. Bulb instantly replaceable from panel front.
2. "Slip-fit" bezel of polished chrome slides out from front—exposing bulb.
3. Supplied with clear white "Bull's-eye" and removable color disc.
4. Different colored discs quickly inserted.
5. Colors show only when lamp is lighted.
6. Also supplied with colored glass . . smooth or diamond cut type.
7. Precision engineered . . made of finest materials.
8. Can be adapted to many various applications.

No. 75 Type is only one of the big line of standard and special Dial and Jewel Pilot Light Assemblies we make. They are used by most leading electrical, radio, and airplane manufacturers.

WILL YOU WRITE FOR OUR CATALOG?

DRAKE MANUFACTURING CO.
1713 W. HUBBARD ST. • CHICAGO, U. S. A.

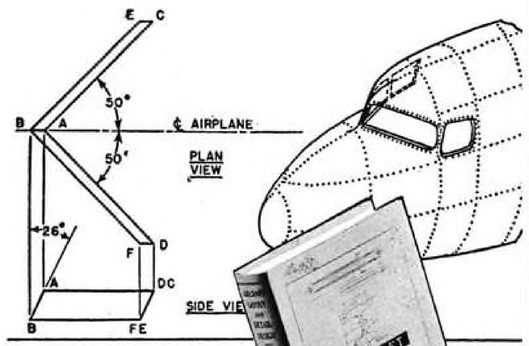

THE BOOK FOR ALL WHO WANT TO BECOME accomplished aircraft layout and design draftsmen

JUST Out!

Without spending a single word on non-essentials, this book shows you plainly—and soundly—how to make layouts and design many airplane parts and fittings that may be made efficiently and economically in the shop. Already used in classes for more than a year, now you may secure it—a compactly presented, self-study course, filled with illustrations, problems and solutions, references, etc.

Aircraft Layout and Detail Design

By Newton H. Anderson,
Program Director of Education Department, Douglas Aircraft Company, Inc.

306 pages, 6 x 9, 230 illustrations. $3.00

Covering the three main subjects with which every aircraft layout draftsman must be familiar: descriptive geometry, detail design and fitting analysis, the book gives you:

—timesaving pointers on layouts, why and how they are made, what information they should contain, etc.

—directions for laying out airfoils from various types of data;

—suggestions on the choice and specification of rivets, nuts, bolts, pins, bearings, and bushings;

—practical factors of forging, casting, and other fabrication processes as they affect detail design;

—fundamentals of stress analysis as applied to detail design;

—methods and examples of calculating bending and torsional stresses, making strength calculations for riveted and bolted joints, struts and columns, and designing thin web beams.

SEE IT 10 DAYS—MAIL THE COUPON

McGRAW-HILL ON-APPROVAL COUPON

McGRAW-HILL BOOK COMPANY, INC.
330 West 42nd Street, New York, N. Y.

Send me for 10 days' examination, subject to approval or return, Anderson—Aircraft Layout and Detail Design. At the end of 10 days I agree to pay $3.00 plus a few cents for postage and delivery, or return the book postpaid. (We pay postage on orders accompanied by remittance.)

Name .....

Address .....

City and State .....

Position .....

Company .....Av. 12-41

(Books sent on approval in U. S. and Canada only.)

GUARDIAN
HAS OR WILL BUILD
ANYTHING YOU NEED
for
ELECTRICAL REMOTE CONTROL
IN
AIRPLANES!

★ Samples of numerous Government Approved Relays—Solenoids—Contactors for Gun Switch Handles used by the Air Corps—Ordnance—Signal Corps are available upon request.

Relays by Guardian are standard equipment for Radio Transmission—Turret Controls—Bombing Equipment—Fire Control—on practically every Aviation Control Application. Write

GUARDIAN ELECTRIC
1614 West Walnut Street Chicago, Illinois
LARGEST LINE OF RELAYS SERVING AMERICAN INDUSTRY

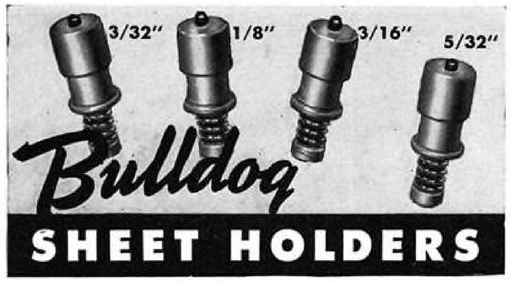

Improved design, developed specially for aircraft construction. Precision made to close tolerances—fit instantly and hold firmly. Breakage is eliminated by improved design and sturdy construction. Proven in aircraft plants.

1/4"

Distributed exclusively by

Aircraft TOOLS, INC.
750 EAST GAGE AVENUE . . . LOS ANGELES



B★A★30

Reg. Trade Mark

B★A★30 airplane wing cloth, famous for its uniformity, is lighter, stronger and more closely woven than other airfoil fabrics.

WELLINGTON SEARS COMPANY
65 WORTH STREET NEW YORK CITY

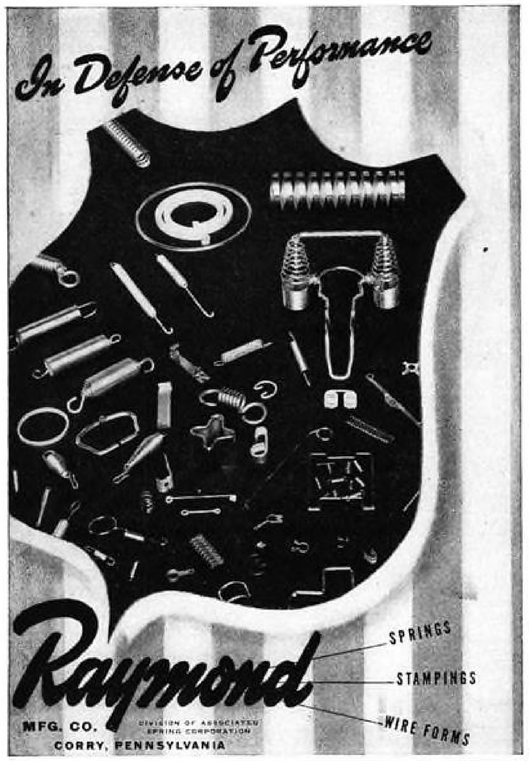

RYERSON CERTIFIED STEELS

Prompt Shipment from 10 Strategically-Located Steel-Service Plants... Principal products include—Alloy Steels, Tool Steels, Stainless Steel, Hot Rolled Bars, Hoops and Bands, Beams and Heavy Structurals, Channels, Angles, Tees and Zees, Plates, Sheets, Cold Finished Shafting and Screw Stock, Strip Steel, Flat Wire, Boiler Tubes and Fittings, Mechanical Tubing, Rivets, Bolts, Nuts, Washers, etc. Write for Stock List. Joseph T. Ryerson & Son, Inc. Plants at: Chicago, Milwaukee, St. Louis, Detroit, Buffalo, Cincinnati, Cleveland, Boston, Philadelphia, Jersey City.

Fourteen years' experience in producing heat-treated aluminum castings

Heat-Treated ALUMINUM CASTINGS for Aircraft

★ ★ ★

ALUMINUM PISTONS

Top quality aluminum alloys are produced in our modern laboratory-controlled foundry. We machine pistons to exacting specifications on up-to-date equipment.

RAY DAY PISTON CORP.
West Warren at Walton
Detroit, Michigan

● When eyes are comfortable, vision is safe *if* it's sharp and clear. Bausch & Lomb Ray-Ban Sun Glasses are preferred by most flyers because they filter out extra light and glare, yet transmit most of that useful for seeing—keep sharp vision comfortable and non-tiring. Descriptive literature on request. Bausch & Lomb Optical Co., 237 Lowell St., Rochester, N. Y.

If you wear glasses, Ray-Ban lenses can be ground to your individual prescription.

BAUSCH & LOMB Ray-Ban

in AUTOMATIC ELECTRIC AVIATION RELAYS

Automatic Electric aviation relays—made especially for aviation use—are world-famous for quality. Tested by time through years of exacting use . . . constantly improved by endless laboratory tests . . . backed by the "know how" gained from 50 years of specialized manufacturing experience—these relays give you the superior performance and long life that mean genuine economy.

Send for your free copy of our comprehensive relay catalog.

These Parts, too, from Automatic Electric

Telephone Handsets
Microphones
Panel Lamps
Lamp Jacks
Lamp Caps
Push Keys
Lever Keys
Dials
Stepping Switches

AMERICAN AUTOMATIC ELECTRIC SALES COMPANY
1033 W. Van Buren Street, Chicago

AUTOMATIC ELECTRIC
RELAY MAKERS SINCE 1898

Incorporates many features important in aircraft design. All parts plated to withstand 200 hour salt spray test. Heavy duty bearing has stainless steel shaft. Very slight armature travel required to operate Micro Switch. . . . This Clare Relay was "custom-built" in collaboration with aircraft engineers to provide light weight and small size; to be resistant to vibration. . . . There are a number of Clare Relays, all "custom-built" for incorporation in aircraft design. They are being widely used by leading aircraft manufacturers. . . . Clare engineers are eager to work with you in designing just the right relay for the job. Write for information. C. P. Clare and Co., 4719 West Sunnyside Avenue, Chicago, Illinois. Sales engineers in principal cities. Cable address: "CLARELAY."

CLARE RELAYS

"CUSTOM-BUILT" for AIRCRAFT

SpeedWay **MINIATURE MOTORS** *for every purpose*

A complete line of direct and back gear, SpeedWay motors—A. C. or D. C., any speed, any voltage. One or a million on short notice made possible by improved designs and large quantity production. *Dependability* developed through daily operation of thousands of these motors. *Stamina* proven by continuous operation of bomb releases, automatic controls, automatic radio tuning, automatic door opening, animated displays, electric turntables and all manner of things.

Cased or skeleton types, back geared to give any speed or torque, single or double, right hand, left hand, top or bottom drive . . . . *just state your requirements; we have or we'll produce the motors at lowest possible cost consistent with dependable performance.*

Catalog Free

SPEEDWAY MFG. CO.
1861 So. 52nd Ave., Cicero, Ill.

When you want **Men**

If you want competent and efficient executives or assistants, experienced in the field served by this journal, you will naturally find the keenest and most progressive men in the industry among the readers of this paper. You can get their attention through a Position Vacant advertisement in the next issue, or possibly find the man you want now among the Position Wanted advertisers in this issue. See the Employment columns of

AVIATION'S MARKET PLACE

What's **NEW** *in Flying?*

Find the answer every month in Aviation—the oldest American aeronautical publication—the most up to date.

New training methods—new flying practices—new theories, money making suggestions—important maintenance and repair ideas for those who fly for pleasure or business, transport or airport operators, etc.—thoroughly covers every angle of flying—business and private—in complete understandable articles fully illustrated with photos, charts and diagrams.

If you are interested in flying, Aviation is as essential to you as fuel to the motor. Start reading it regularly today.

Mail Coupon Now . . . No Money Needed

AVIATION
330 W. 42d St., New York City

Send me Aviation for one full year at $3.00. I will remit when I receive your bill.

Name .....
Address .....
City and State .....
Nature of Activity .....

SUBSCRIPTION RATES:

United States, Mexico and Central and South American countries, $3.00 a year. Canada $3.50 for one year. All other countries, $5.00 a year or 30 shillings. Member of A.B.C.

A. F.

Use the convenient coupon at left. No money needed now. We will bill you. But don't miss another valuable issue of AVIATION. Make sure you receive it each month by filling out and mailing us the coupon at once—NOW.

PLANISHING **DIMPLING** **FLUSH RIVETING**
LOW COST *HIGH SPEED*

Imperfections in sheets or stampings can be completely removed—the smoothest possible finish obtained in shortest time at least cost—with SFH and STH SEIDEN PLANISHING HAMMERS.

Especially adapted to dimpling, flush type riveting, etc. Plenty of power for setting ¼" iron rivets cold.

Fast, positive, easy to operate and control. Low first cost; low operating cost. Sturdily built to withstand hardest continual usage.

Powered by compressed air. SFH Hammer delivers 4,000 to 8,000 and STH Hammer, 300 to 3,000 feather strokes or heavy blows per minute. Handles all metals up to 18 gauge steel.

Get complete details at once on SEIDEN HAMMERS and what they are doing for others. Speed production; cut costs. Write us today.

SEIDEN

We also make smaller Planishing Hammers, portable Pneumatic Hammers, etc.

SEIDEN PNEUMATIC TOOL CO.
JACKSON • MICHIGAN

ALLIED AVIATION
Corporation
MOLDED PLYWOOD AIRCRAFT
BALTIMORE, MD., U. S. A.

•

Plastic Bonded
MOLDED PLYWOOD AIRCRAFT COMPONENTS

Versatility and Strength

Prompt Deliveries

★ ★

Light Weight
PLUS STRENGTH

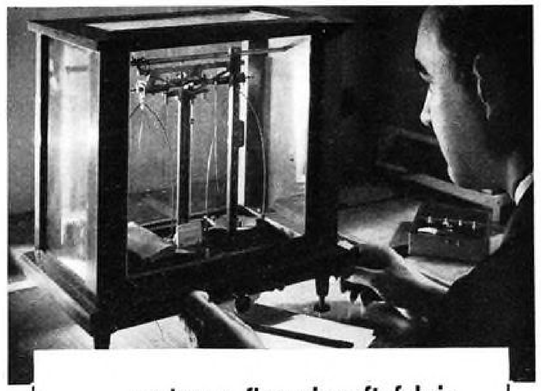

. . . makes a fine aircraft fabric

HAVE you looked at aircraft fabric specifications lately?

There have been some changes made. One of the most remarkable has been the increase in the weight-strength ratio. Fabrics today are stronger, lighter in weight than ever before.

Airwing Aircraft Fabrics are keeping pace with America's fast moving aviation industry. We maintain rigid manufacturing controls throughout every step in the making of these fine cloths. Then the Thurston Laboratory tests . . . tests . . . tests—just to be on the safe side.

Are you using Army and Navy Specification fabrics? Do you manufacture light planes? Are you sub-contracting fabric-covered surfaces? You will wish to know all about Airwing products.

Send for file-size folder containing swatches of actual Airwing Fabrics and Tapes.

AIR WING FABRICS

W. HARRIS THURSTON
★*THURSTON CUTTING CORPORATION*★
Main Office: 40 Worth Street, New York, N. Y., U. S. A.
Laboratory, Cutting Factory and Warehouse at 17 Beach St., New York, N. Y., U. S. A.

WIND DRIVEN GENERATORS ★ **DIRECT-CRANKING STARTERS**

Light—Strong—Air-cooled—Low-priced aviation generator, with voltage control. Easily installed—fully guaranteed. 6 or 12 volts; $25 to $45.

Light-weight, low-priced electric starters—complete with solenoid and starter button—Three sizes fit engines to 300 HP. . . 4" or 5" Standard Mounting.

Also Engine Driven Generators

CHAMPION Aviation Products

1702 South Flower Street • Los Angeles, California • PRospect 2185

Weight Only 16 lbs., 2 oz.

ESTABLISHED 1813. BANKERS MARTINS BANK LTD.

ALFRED PARTRIDGE & CO. LTD.,

ENGINEERS

ASHTON RD., BREDBURY, STOCKPORT, ENGLAND.

We cordially invite correspondence with American & Canadian Manufacturers who are seeking an organisation with Modern Facilities and Services for effectively serving British markets. Long established and very excellent clientele available. All kinds of products solicited for large and varied market. Please WRITE.

If there is anything you want—

or something you don't want that **other** readers of this paper can supply—or use—advertise it in

Aviation's Market Place

AVIATION "CLASSIFIED"

WHERE TO BUY

NEW EQUIPMENT — ACCESSORIES — MATERIALS — SUPPLIES

FREE--NEGATIVES for Fuse and EQUIPMENT BLUE PRINTS

Save time—save expense—by having this valuable complete set of 12 Van Dyke Negatives on hand! Actual working drawings. Each print gives name of product, measurements, specifications, Littelfuse Cat. No., Army and Navy No., amp rating (if fuse), weights, etc. Any aircraft manufacturer may obtain set without cost from Littelfuse, Inc. Run as many blueprints as needed—a set for each draftsman. Write

LITTELFUSE INC. 4749 Ravenswood Ave. Chicago, Ill.

JACOEL CABLE SPLICER

For splicing Aircraft control cables and HOISTING SLINGS.

In use by U. S. Government, Aircraft Factories and Schools

I. JACOEL CABLE SPLICING EQUIPMENT CO.

1880 HERTEL AVENUE BUFFALO, N. Y.

(write for literature)

Save Hands Save Time

There's no time today for accidents which delay production or for slowed-up handling of materials. The correct industrial gloves enable men to handle all kinds of rough, heavy, or hot materials with speed, safety and savings. A small investment in Steel-Grip Safety Gloves avoids injuries, lay-offs, trouble. Write *now* for new catalog of safety gloves, clothing, aprons, leggings, spats, etc. . . . of value to every executive, 3500 items in line. Standard with *big* industrials. Write today.

INDUSTRIAL GLOVES COMPANY 729 Garfield Blvd., Danville, Illinois

ALLEN Flux for STAINLESS STEEL

For production, maintenance, and repair work. Works with all soders—fast—easy. Send for free samples.

L. B. ALLEN CO. INC. 6753 Bryn Mawr Ave., Chicago, Ill.

STANDARD AIRCRAFT FINISHES Since 1913

TITANINE

TITANINE INC. UNION, N. J.



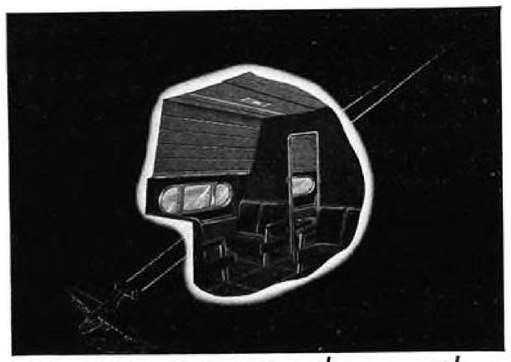

AMERICAN AVIATION *takes another Step Forward—thanks to* **NATIONAL VULCANIZED FIBRE**

The installation of panelling in today's planes is being done faster—more practically and attractively due to a remarkable new product, FYBR-TECH*—laminated wood veneers with National Vulcanized Fibre backing. This product has everything needed for airplane panelling due to the outstanding characteristics of National Vulcanized Fibre: amazing flexibility (bends of 1 inch radius are simple), great mechanical strength, light weight, high dielectric strength, ease of fabrication. National Vulcanized Fibre has countless unusual uses. We invite inquiries.

** Made by Technical Ply-woods, Chicago.*

NATIONAL VULCANIZED FIBRE CO.

WILMINGTON DELAWARE

REZNOR Gives You More Heat at . . . LOW COST PER HOUR

Suspended Fan and Blower Types . . . .

HERE'S an attractive, self contained gas heating plant which provides safe, trouble-free heat ECONOMICALLY. Installation and maintenance costs hit a NEW low. Suspended from the ceilings in factories and commercial buildings, they move more warm air over larger areas with less noise and at lower cost. You sacrifice these features with other types of heating. For years, Reznor Heaters have been giving uninterrupted service to many of America's important industrial and commercial buildings. Reznor Line is complete. Write for interesting catalog U 42 today.

REZNOR MANUFACTURING CO.

403 James St., Mercer, Penna.

"GAS HEATERS EXCLUSIVELY SINCE 1888"

McGRAW-HILL **DIRECT MAIL LISTS**



As business paper publishers for over fifty years, McGraw-Hill is uniquely equipped to offer complete, authoritative direct mail coverage of Industry's major markets. Extreme accuracy is maintained (guaranteed to 98%) and through careful analysis of markets, complete classification of companies and personnel, etc., the widest possible selections are available. Send for handy reference folder "Hundreds of Thousands of Reasons Why" which describes how McGraw-Hill Lists are built and maintained.

• **What Fields Do You Want to Reach?** •

Aviation
Bus & Electric Railways
Civil Engineering and Construction
Coal Mining
Electrical Construction
Electrical Industry
Food Industries
Metal Mining
Metal Working Industries
Process Industries
Textile Industries
Administrative Executives
Electrical Dealers & Wholesalers
Mill Supply Houses
Power Services
Product Engineering & Design
Production and Maintenance
Radio Dealers & Wholesalers
Radio Engineering & Design

For farther details, selections from above basic classifications, counts, prices, etc., or estimates on special lists . . . ask any representative or write to

DIRECT MAIL DIVISION....

McGRAW-HILL PUBLISHING CO.

330 W. 42nd STREET NEW YORK, N. Y.

. . Complete lists covering industry's major markets

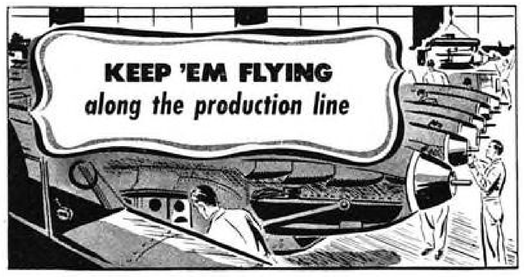

***. . . with precise* CONTROL-BY-COUNT**

Production of every plane and motor part flies faster . . . when you have hour-by-hour or day-by-day reports on the performance of every machine and operator. From these "facts-in-figures" you can build a central control-platform from which you can regulate, promptly and fairly and with far greater efficiency, work-schedules, production traffic, uniformity of unit quality, wage payments, maintenance needs. Write for full information on how *your plant* can "Control-by-Count." Veeder-Root Inc., Hartford, Conn.

VEEDER-ROOT

COUNTING & COMPUTING DEVICES

CLASSIFIED ADVERTISING

AVIATION'S MARKET PLACE

(For rates see October, 1941 issue)

Aeronca

One seventh share of AERONCA Chief 1941 ($200.00). Write William Scheck, 40 Oakdene Ave., Cliffside Pk., N. J.

Cub

CUB TRAINER J3C, 125 hours, 1941, Continental 65, Muffler, brakes, special painted RAF colors. $1350.00. Max B. Bullen, 605 Commonwealth Ave., Jackson, Michigan.

Culver

Continental 75—1941 model. This ship does not even have an hangar scratch. Never damaged. 34 hours total time. Sacrifice $1,700.00. Write David Gaare, 1285 Cleveland Ave., N., St. Paul, Minnesota.

Piper

1940 PIPER Cruiser, 75 Continental, privately owned, always hangared, kept clean, waxed and checked regularly. Relicensed August. 155 honest hours. Best offer $1545. Glenn C. Bream, Gettysburg, Penna.

Stinson

1935 STINSON-Reliant—245 H. P. Lycoming Smith Contr. Prop. Directional Gyro, Flares, Tires and Battery good. Color red, total time under 600 hours. Majored at factory—price $2700. Write P. W. King, Darr School of Aeronautics, Box 765, Ponca City, Okla.

Porterfield

PORTERFIELD 35-70. Excellent condition, just relicensed. New tires; 4½ gal. per hour. Cruises 105, $800. H. Shelburne, Ogallala, Nebraska.

Vultee

VULTEE VIA—Cyclone 775 H.P.; ten place; licensed; perfect condition. Link Aeronautical Corporation, Binghamton, N. Y.

Waco

WACO RNF 125 H.P. Warner. Has been stored, never licensed. Recently new type fittings installed and inspected ready for licensing. Guaranteed total time on ship 110 hours. George Moore, Berea, Kentucky.

1938 WACO Custom. Gun Metal gray, cream trim. A-1 condition. 300 hours on motor since major overhaul. Complete equipment for CPT Cross Country Course. Peoria Flying Service, Peoria, Illinois.

Engines & Parts

See also ads marked (P) in group Classifications

ONE OVERHAULED Warner Motor 145 or 165 H. P.; ONE WASP C or SC1 Motor. 10-1 Blower Gears, Wasp C cylinders Wanted. 829 North St. Mary's Street, San Antonio, Texas. No. 1

Equipment & Products

Aircraft Batteries

AIRCRAFT BATTERIES rebuilt New plates and separators. Your case, cover and costs. Let us quote. Bowers Battery Mfg. Co., Inc., Reading, Pa. No. 2

Miscellaneous

LET US SUPPLY your aircraft needs—MacWhyte cable—Goodrich tires Titanine Dope—Lycoming parts Sensenich Propellers—Dealers write. Becker Aircraft Supply Co., Pitesburg-Bettis Airport, Pittsburgh, Pa. No. 3

Parachutes

PARACHUTES bought, sold, serviced and rented, New York Distributor for Irvin Air Chute. Have several used Irvin Quick Connectors at reasonable prices. Joe Crane, Roosevelt Field, Mineola, L. I., N. Y. No. 4

INDEX

AVIATION "Classified" — Dec., 1941

Undisplayed ads offering only ONE make of plane are grouped under that make. Others appear under "USED PLANES—General" and are numbered and indexed to enable readers to conveniently locate the makes of planes offered, or other items of interest. All other undisplayed and displayed ads—excepting those relating to employment and business opportunities—are numbered, or referred to by number, and indexed for the reader's convenience in quickly finding ads.

Used Planes

BY MAKE:

Howard 40, 48
Luscombe 48

ENGINES, PARTS, Etc 1, 47

EQUIPMENT & PRODUCTS:

See Classification and/or Numbers as follows:

Aircraft Batteries 2
Cable Splicer 25
Finishes 45
Flux 15
Inspectionettes 27
Instruments 31, 42, 44
Miscellaneous 3, 31
Negatives 28
Parachutes 4, 48
Parachute Opening Device 5
Propeller 33
Safety Gloves 24
Skis 6, 23

SERVICES AND INSTRUCTION:

See Classification and/or Numbers as follows:

Instruction (books) 7, 8, 9, 10, 11, 36
Repairing 33, 48
Sales and Service 33, 42, 48
Schools 12, 13, 16, 17, 18, 19, 20, 21, 22, 29, 30, 32, 35, 37, 38, 39, 43, 46

SPECIAL SERVICES 14, 34
EXPORTING 14
TRADE *(See ads keyed "T")*
EMPLOYMENT *(See also page 255)*
BUSINESS OPPORTUNITIES 41
PROFESSIONAL SERVICES 26

Equipment & Products

Parachute Opening Device

SMALL AUTOMATIC parachute opening device. Write me or tell the man who should know how and when useful; now is the time. E. Laurisin, 420 Dollar Bank Bldg., Youngstown, Ohio. No. 5

Skis

SKIS: C.A.A. approved skis available in all metal, wood and metal and metal skid types. Skis for all makes and models of airplanes, light weight, modern installation. Low prices. Used reconditioned, approved skis for all airplanes. Write for prices. Federal Aircraft Works, Minneapolis, Minnesota. No. 6

Services & Instruction

Books

COMPLETE LINE of aircraft Books, Log Books. Protractors License case, etc. Special price to Dealers. Becker Aircraft Supply Co., Pittsburg—Bettis Airport, Pittsburg, Pa. No. 7

AIRCRAFT AND ENGINE Mechanics Book. (Just published) Authentic (Multiple Choice) examinations shown on Aircraft, Engines and CAR. Illustrated with pertinent diagrams. Three subjects for only $3.00 Postpaid or C.O.D. Aviation Publishers, P. O. Box 2464, Hollywood, California. No. 8

AERONAUTICAL TRAINING. New 1941 twelfth edition bristling with the multiple choice examinations for Commercial and Private Pilots. Gust factor, alternate airport and offcourse problems explained. Fifty new pages with pertinent illustrations. Only $3.00 postpaid or C. O. D. Aviation Publishers, P. O. Box 2464, Hollywood, California. No. 9

Services & Instruction

Books—(Con't)

AIR NAVIGATION BOOK with Dept. of Commerce Navigation Plotter first edition 1941, and it's new and different. Size 14 x 8½ red leatherette cover, gold letters. Plotter fits in patent cover pocket. Text covers Air Navigation with authentic problems given on examinations. $4.00 complete, postpaid or C. O. D. Aviation Publishers, P. O. Box 2464, Hollywood, California. No. 10

GROUND INSTRUCTOR RATING. Just published. Covers Aircraft, Engines, Navigation, Meteorology and CAR. (Typical multiple choice examinations shown) with dictionary of aviation terms in back of book. $3.00 postpaid or C. O. D. Aviation Publishers, P. O. Box 2464, Hollywood, California. No. 11

See Page	Advertiser	Number
74	Academy of Aeronautics	12
239	Aero Industries Technical Institute	13
256	Aircraft Exporting, Corp.	14
252	Allen Co., Inc., L. B.	15
257	American School of Aircraft Institute	16
59	Boeing School of Aero	17
19	Cal-Aero Academy	18
74	Casey Jones School of Aero	19
11	Curtiss-Wright Tech. Institute	20
211	Dallas Avia. School of Air College	21
182	Embry-Riddle School of Aviation	22
252	Federal Aircraft Works	23
252	Industrial Gloves Co.	24
252	Jacoel Cable Splicing Eq. Co., I.	25
255	Lancaster, Allwine & Rommel	26
256	La Tour Aeronautical Sales	27
252	Littelfuse, Inc.	28
257	Luscombe School of Aeronautics	29
19	Mira-Loma Academy	30
256	Ort, Karl	31
255	Pan American Navigation Service	32
256	Pester's Propeller Service	33
256	Philadelphia Rust Proof Co.	34
19	Polaris Academy	35
255	Question Air System	36
257	Rising Sun School of Aeronautics	37
240	Roosevelt Aviation School	38
257	Ryan Aeronautical Institute	39
256	Seaboard Aircraft Sales	40
255	Simmonds Aerocessories Inc.	41
256	Snyder Aircraft Corp.	42
32	Spartan School of Aero	43
256	Standard Aircraft Eq. Co.	44
252	Titanine, Inc.	45
257	Tri-State College	46
256	Vimalert Co., Ltd., The	47
256	Wines Field, Inc.	48

Employment

Positions Vacant

AVIATION GROUND INSTRUCTORS, preferably Ex-Air Corps men, needed to teach subjects covered by Air Corps Technical School curriculum in Airplane and Engine Mechanics. Send full particulars and photo (not returnable) in first letter. Roosevelt Aviation School, A.C.T.D., Mineola, N. Y.

INSTRUCTORS To teach Army Air Corps Students. Prefer Chanute Field Mechanics Course graduates. Rising Sun School of Aeronautics, 191 W. Roosevelt Blvd., Philadelphia, Pa.

Positions Wanted

(Additional Position Vacant ads on opposite page)

ELECTRICAL AND MECHANICAL ENGINEER, experienced with aircraft electric motor design, also gearing, magnetic brakes, voltage regulators, hydraulic equipment, now employed with company of established reputation, who would consider association with a new company now forming offering a stock interest and salary to the right man. Give full particulars in first letter. All acknowledged. PW 699, Aviation, 330 West 42nd St., New York City.

AVIATION'S MARKET PLACE

The Original Test Yourself Texts

PRIVATE PILOT'S AID, 200 (multiple choice) questions with answer key. Civil Air Regulations, Navigation, Meteorology and the new subject, General Service Of Aircraft $1.00
COMMERCIAL PILOT'S AID, 350 (multiple-choice) questions with answer key. C.A.R., Navigation, Meteorology, Airplanes, Powerplants with Alternate Airport and Factor problems $3.50
FLIGHT INSTRUCTOR'S AID, 200 (multiple-choice) questions with answer key. Covers flight instruction including load factors $1.00
GROUND INSTRUCTOR'S AID, over 800 (multiple-choice) questions with answer key. Covers C.A.R., Navigation, Meteorology, Airplanes and Powerplants with diagrams. Has proven valuable also for pilots who desire more coverage $2.75
AVIATION MECHANIC'S AID, 450 (multiple-choice) questions with answer key. Covers Airplanes, Powerplants and C.A.R. A barometer to determine your knowledge on these subjects. $1.75
RADIOTELEPHONE OPERATOR'S AID, the 60 actual questions from which the test questions are taken for Third Class operators examinations, with answers. Necessary C.P.T. X.C. applicants, instrument rating applicants and for flight above 3500 ft. on Civil Airways ..... $.50
AIRPLANE & ENGINE TEST, 154 written type questions and answers. While they last ..... $.75
HANGAR TALES, this little book will make you ground-loop out of bed, spin down the stairs and go into a powerdive of laughter. Aviation songs, poems, jokes, oddities and tall tales ..... $.75
FLYING CLUB ORGANIZATION, a valuable guide to those who desire to organize a flying club in their locality. Including initial organization, by-laws, financing and insurance plans, aircraft selection and flight training ..... $.75
AERIAL PHOTOS, How To Make and Sell Them, by Claud J. Dry, 70 p. $1.00
SIMPLIFIED INSTRUMENT FLYING, by Capt. Creighton Mackey $1.00
All publications sent postpaid same day. All questions except RT are not actual but simulated. Question-Air Texts act as a barometer to your aeronautical knowledge.

QUESTION-AIR SYSTEM
P.O. Box 1061 Kilgore, Texas

Part Time Work

REGISTERED PATENT AGENT, exceptional training in physics and electricity, Ph.D., Physics 1935, thorough experience in all phases of patent law, familiar with principal foreign languages, seeks part-time connection with a firm or small corporation, preferably in New York, that will permit utilization of time now available in handling work of personal clientele. PW 698, Aviation, 330 West 42nd St., New York City.

Wanted

ONE LOCKHEED VEGA. 829 North St. Mary's Street, San Antonio, Texas.

TYPE Y-150 Eclipse direct cranking electric starter, new or used. A. D. Zaebst, Ada, Ohio.

Patent Attorney

PATENT PARTICULARS and blanks, free; from Patent Attorney who is Government-Registered 35 years. Sterling Buck, V-Hotel Plaza, Washington, D. C.

PROFESSIONAL SERVICES

LANCASTER, ALLWINE & ROMMEL
Booklet—"General Information Concerning Inventions & Patents" and "Fee Schedule" sent without obligation.
Established 1915
Patents—Copyrights—Trade-Marks
Suite 452, 815—15th St., N.W., Washington, D. C.

FOR EVERY
BUSINESS WANT
"Think Searchlight *First"*

NEW DEAD RECKONING EQUIPMENT

For Defense of Land, Sea and Air

AIR NAVIGATION TEXT with Dept. of Commerce Navigation Plotter. Necessary for Cross-country flights, and for Commercial and instrument rating examinations. Difficult radius of action. Off-course and alternate airport problems plotted and solutions given in a simple understandable method similar to the text used in the U. S. Naval Academy but improved. Book size 14x8½ in handsome red leatherette with gold letters. Plotter contained in patent cover pocket. Combination only $4.00 postpaid or C.O.D.

NEW AVIATION DEFENSE BOOKS

COMMERCIAL and PRIVATE PILOTS: New "Aeronautical Training" fully covers new multiple choice examinations, with drift, off-course and alternate airport problems plotted and solution given. Load factor problem also solved. Commercial examinations are shown in separate section of the book. Navigation, Meteorology, Aircraft, Engines and CAR covered. Just published—12th edition only $3.00 postpaid, or C.O.D.

FLIGHT INSTRUCTOR: A new quiz covering the scope of the written examination for flight instructor rating. Illustrated. $2.00 postpaid or C.O.D.

GROUND INSTRUCTOR: A new book, fully illustrated covering Ground Instructor training on Navigation, Meteorology, Aircraft, Engines and CAR. Why fail? Only $3.00 postpaid.

GROUND INSTRUCTOR RATING. Just off the press. An auxiliary text to be used in conjunction with "Ground Instructor." This text shows scope of "Multiple Choice" examinations. A dictionary of aviation terms are in back of book. $3.00 postpaid or C.O.D.

A & E MECHANICS RATING: Airplane and Engine Mechanics—Can you pass your written test? Send for new quiz book covering Airplanes, Engines, and Mechanics' Civil Air Regulations. 156 pages, fully illustrated, with complete sets of latest examination questions. Only $3.00 postpaid or C.O.D.

RADIO AND INSTRUMENT FLYING by Charles A. Zweng. Instructor, U. S. AIR CORPS. New 1941 Edition covering new important material. Written especially to prepare the pilot for government examination for "instrument rating." Radio-Telephone Permit included with Meteorology, Radio-Orientation, let-down, off-course and alternate airport problems. Only $4.00 postpaid.

AIR NAVIGATION (Gold Medal Edition) includes meteorology, $5.00 postpaid.

SIMPLIFIED CELESTIAL NAVIGATION by P. V. H. Weems and E. A. Link, Jr. $3.00 postpaid.

DALTON MARK VII AIRCRAFT COMPUTER. With book of instruction ..... $7.50.

PAN AMERICAN NAVIGATION SERVICE
1435 Flower St., Dept. M.H. Glendale, California

Long established manufacturer of medium and heavy precision machinery is in the market for patented or patentable ideas or inventions requiring development for production and marketing.

Want items applicable to the defense program or suitable for industrial use after the emergency. Both machinery and other products lending themselves to small volume production will be considered. Send complete details on protected ideas to —

BO-697, Aviation
520 No. Michigan Ave., Chicago, Ill.

SIMMONDS DEVELOPMENT DIVISION

Simmonds Aerocessories Inc.
Dept. B
10 Rockefeller Plaza
New York City, N. Y.

Seeks new types of aircraft and engineering accessories and components, preferably patented and also established U. S. products, for development and manufacture by the Associated Companies of the

SIMMONDS GROUP
throughout the world

WANTED

COMPETENT DRAFTSMEN to fill attractive positions relating to experimental development of aircooled engine installations. Aeronautical engineering education and aircraft experience obviously desired but not essential for all positions available. Apply by letter to Installation Department, CD Applications not solicited from persons now employed in aircraft manufacturing industry.

ENGINEERING STRESS ANALYST capable of independent design and analysis of aircraft structures relating to power plant installations. Apply by letter to Installation Department, SA. Applications not solicited from persons now employed in aircraft manufacturing industry.

ENGINEER familiar with aircraft power plant design, fabrication and testing and capable of composing, editing and preparing technical reports, bulletins and manuals relating to this art. Apply by letter to Installation Department, E. Applications not solicited from persons now employed in aircraft manufacturing industry.

AIRPLANE POWER PLANT ENGINEER familiar with mock up practice. Attractive position open to experienced applicant interested in pursuing this form of power plant design development and control for an experimental power plant design group. Applications not solicited from persons now employed in aircraft manufacturing industry. Apply by letter to Installation Department, P.P.

FLIGHT TEST ENGINEER capable of supervising the assembly of experimental aircraft power plant installations, test instruments and special test equipment, and familiar with both airplane and power plant flight test procedure. Must be able to set up complete flight programs and supervise recording of data in flight. Applications not solicited from persons now employed in aircraft manufacturing industry. Apply by letter to Installation Department, FT.

AIRCRAFT ENGINE POWER ANALYST. Must be thoroughly familiar with engine characteristics with all forms of supercharging and under all altitude conditions. Aeronautical engineering education desired but not essential if experience gained as result of altitude chamber testing. Applications not solicited from persons now employed in aircraft manufacturing industry. Apply by letter to Installation Department, PA.

ENGINEERING GRADUATES desiring opportunity to engage in field testing of airplane power plant installations. Depending upon previous experience, if any, applicants must anticipate two to three years of training in dynamometer testing and flight testing. Applications not solicited from persons now employed in aircraft manufacturing industry. Apply by letter to Installation Department, EG.

POWER PLANT TEST PILOT to conduct flight tests specifically in conjunction with experimental development of air cooled engine installations. Desire versatile pilot interested and experienced in engine characteristics rather than in airplane stability and flying qualities. Engineering education desired but not essential. Installation Department, TP.

PRATT & WHITNEY AIRCRAFT
East Hartford, Connecticut

ENGINEERS WANTED FOR DEFENSE WORK

Experience in Aircraft Desirable But Not Essential if Otherwise Qualified

GROUP ENGINEERS
LAYOUT DRAFTSMEN
STRESS ENGINEERS
WEIGHT ENGINEERS
AERODYNAMICISTS
LOFTING ENGINEERS

Excellent opportunities for advancement. If you are not employed in Defense Work,

WRITE OR WIRE

McDonnell Aircraft Corporation
Lambert-St. Louis Municipal Airport
ROBERTSON, MISSOURI

AIRCRAFT
TUBING
RIVETS
SPRUCE
HARDWARE
INSTRUMENTS
& MATERIALS
KARL ORT
YORK, PA.

PESTER'S PROPELLER SERVICE
PROPELLERS
Latin American Trade Solicited
SALES • REPAIRS • SERVICE
U. S. Bureau of Air Comm. Appr. Prop. Repair Sta. 182
• PESTER'S •
ROOSEVELT FIELD, MINEOLA, N.Y., U.S.A.

the* PREFERRED INSTRUMENT *Service

Each instrument, repaired or installed by Snyder's factory-schooled instrument technicians is individually calibrated to the specific plane in which it is installed.

Guaranteed service on all types and makes of aircraft . . . overhaul service and reconditioned instruments carry 6 months guarantee. Stock is complete with new and reconditioned instruments to meet your requirements.

"Airline Facilities for the Private Pilot"

NO DELAY! *Your order at Snyder's gets immediate attention and prompt return.*

SNYDER AIRCRAFT CORPORATION
Municipal Airport CHICAGO, ILL.

SNYDER'S APPROVED Repair Station No. 294

ENGINES FOR SALE

HORNET	525 H.P.	WASP	450 H.P.
HISPANO	180 H.P.	J-6-9	300 H.P.
CONQUEROR	600 H.P.	D-12	435 H.P.
LIBERTY	400 H.P.	PACKARD	300 H.P.

Engines Available in Quantities
THE VIMALERT COMPANY, Ltd.
813 Garfield Ave. Jersey City, N. J.

Anodizing of Aluminum
Dow Metal Treatment of Magnesium
Cadmium & Chromium Plating
Philadelphia Rust-Proof Co.
3217 Frankford Ave. Phila., Pa.

SEE US FOR
INSTRUMENTS
Approved Repair Station 188
NEW — USED — ALL TYPES — SALES — REPAIR — INSTALLATION — COMPLETE STOCK
STANDARD AIRCRAFT EQUIPMENT COMPANY
Hanger "D," Roosevelt Field, Mineola, L. I., N. Y. Garden City 8753

INSPECTIONETTES
Newest, most practical aircraft accessory to eliminate all cutting and resewing of fabric for inspection.

Ready finished in over 51 standard aircraft colors for all types of planes. 25¢ ea. complete with Pyralin ring reinforcement.
Write for descriptive circular in color.
LA TOUR AERONAUTICAL SALES
6424 S. La Porte Ave.
Municipal Airport, Chicago, Ill.

Seaboard Aircraft Sales
H. Warren Holladay, Manager
Hangar E—Roosevelt Field
MINEOLA, N. Y.—Phone Garden City 2522
Outstanding Values in used Howards, Spartan Executives, Stinsons, and Wacos for sale
Inquiries invited
(A sales division of Wings Field, Inc.)

WINGS FIELD, INC.
AMBLER, PA.
Specialists in General Aircraft Service
Approved Engine and Aircraft Repairs
RCA Radio Sales and Service
Parachute Packing and Rigging
Distributors:—HOWARD & LUSCOMBE
Brokers in High Grade Used Ships

LEGAL NOTICE

STATEMENT OF THE OWNERSHIP, MANAGEMENT, CIRCULATION, ETC., REQUIRED BY THE ACTS OF CONGRESS OF AUGUST 24, 1912, AND MARCH 3, 1933

Of Aviation, published monthly at Albany, N. Y., for October 1, 1941.

State of New York }
County of New York } ss.

Before me, a Notary Public in and for the State and county aforesaid, personally appeared D. C. McGraw, who, having been duly sworn according to law, deposes and says that he is the Secretary of the McGraw-Hill Publishing Company, Inc., publishers of Aviation, and and that the following is, to the best of his knowledge and belief, a true statement of the ownership, management (and if a daily paper, the circulation), etc., of the aforesaid publication for the date shown in the above caption, required by the Act of August 24, 1912, as amended by the Act of March 3, 1933, embodied in section 537, Postal Laws and Regulations, printed on the reverse of this form, to wit:

1. That the names and addresses of the publisher, editor, managing editor, and business managers are: Publisher, McGraw-Hill Publishing Company, Inc., 330 West 42nd St., N. Y. C. Editor, Leslie E. Neville, 330 West 42nd St., N. Y. C. Managing Editor, Carl Norcross, 330 West 42nd St., N. Y. C. Business Manager, George W. Pfeil, 330 West 42nd St., N. Y. C.

2. That the owner is: (If owned by a corporation, its name and address must be stated and also immediately thereunder the names and addresses of stockholders owning or holding one per cent or more of total amount of stock. If not owned by a corporation, the names and addresses of the individual owners must be given. If owned by a firm, company, or other unincorporated concern, its name and address, as well as those of each individual member, must be given.) McGraw-Hill Publishing Company, Inc., 330 West 42nd St., N. Y. C. Stockholders of which are: James H. McGraw, 330 West 42nd St., N. Y. C. James H. McGraw, Jr., 330 West 42nd St., N. Y. C. James H. McGraw, James H. McGraw, Jr., and Curtis W. McGraw, Trustees for: Harold W. McGraw, James H. McGraw, Jr., Donald C. McGraw, Curtis W. McGraw, 330 West 42nd St., N. Y. C. Edwin S. Wilsey and Curtis W. McGraw, Trustees for James H. McGraw, 3rd, Madison, N. J. Curtis W. McGraw, 330 West 42nd St., N. Y. C. Donald C. McGraw, 330 West 42nd St., N. Y. C. Anne Hugus Britton, 330 West 42nd St., N. Y. C. Mildred W. McGraw, Madison, N. J. Grace W. Mehren, 73 No. Country Club Drive, Phoenix, Ariz. J. Malcolm Muir & Guaranty Trust Co. of New York, Trustees for Lida Kelly Muir, 140 Broadway, N. Y. C.

3. That the known bondholders, mortgagees, and other security holders owning or holding 1 per cent or more of total amount of bonds, mortgages, or other securities are: (If there are none, so state.) None.

4. That the two paragraphs next above, giving the names of the owners, stockholders, and security holders, if any, contain not only the list of stockholders and security holders as they appear upon the books of the company but also, in cases where the stockholder or security holder appears upon the books of the company as trustee or in any other fiduciary relation, the name of the person or corporation for whom such trustee is acting, is given; also that the said two paragraphs contain statements embracing affiant's full knowledge and belief as to the circumstances and conditions under which stockholders and security holders who do not appear upon the books of the company as trustees, hold stock and securities in a capacity other than that of a bona fide owner; and this affiant has no reason to believe that any other person, association, or corporation has any interest direct or indirect in the said stock, bonds, or other securities than as so stated by him.

5. That the average number of copies of each issue of this publication sold or distributed, through the mails or otherwise, to paid subscribers during the twelve months preceding the date shown above is. (This information is required from daily publications only.)

D. C. McGRAW, Secretary.
McGRAW-HILL PUBLISHING COMPANY, INC.

Sworn to and subscribed before me this 29th day of September, 1941.
[SEAL] H. E. REIRNE,
Notary Public, Nassau County, Clk's No. 93, N. Y. Clk's No. 974, Reg. No 2-R-609.
(My commission expires March 30, 1942)

AIRCRAFT EXPORTING CORPORATION
U. S. EXPORT LICENSE NO. 413
WE BUY AND SELL ALL TYPES OF TRANSPORT AIRCRAFT AND EQUIPMENT
501 FIFTH AVENUE CABLE: MARSHCO NEW YORK NEW YORK

AVIATION SCHOOLS
Aeronautical Engineering — Ground — Mechanics
Flying — Instrument

GET STARTED *RIGHT*
AND YOUR FUTURE IN AVIATION WILL BE ASSURED/

SO much depends upon the kind of training you receive that it pays to select the school that does a thorough job.
The Luscombe School, through its association with the Luscombe Airplane Corp. offers unique advantages to young men who see the marvelous future possibilities in Aviation.
Painstaking personal instruction by practical and experienced teachers will give you the finest kind of start. This is the reason why LUSCOMBE GRADUATES WILL BE FOUND WHEREVER AIRPLANES ARE BUILT, SERVICED OR REPAIRED.
Write for free folder, "Aviation Today and Tomorrow.

GOVERNMENT COURSES APPROVED
ONE YEAR GOV'T APPROVED MASTER MECHANICS
8 MONTHS GOV'T APPROVED ENGINE MECHANICS
8 MONTHS GOV'T APPROVED AIRPLANE MECHANICS
ALSO SHORT COURSES: 3 MONTHS SHEET METAL 2 MONTHS AIRCRAFT WELDING

Luscombe SCHOOL OF AERONAUTICS
Division of Luscombe Airplane Corp. World's largest Manufacturers of All-Metal Light Airplanes
DEPT. B, WEST TRENTON, N. J. and 3401 COMMERCE ST., DALLAS, TEXAS

RISING SUN SCHOOL OF AERONAUTICS
Complete Airplane and Engine Mechanics Course qualifying for C.A.A. License U. S. Gov't-Approved School. Contractors U. S. Army Air Corps. Graduates with LEADING Airlines, Aircraft and Engine Mfgrs. Enroll now for next class. Day or evening.
191 W. Roosevelt Blvd., Phila., Pa.

Would you like to know
AIRPLANE STRESS ANALYSIS
DRAFTSMEN AND DESIGNERS
Complete your technical training by studying Airplane Stress Analysis at home. This Ryan Institute course is written by an outstanding stress engineer and is presented in an extremely practical manner. Mail ad for complete details.
RYAN AERONAUTICAL INSTITUTE
1212 Lindbergh Field, San Diego, California
Home Study Affiliate of Ryan School of Aeronautics

NOW...Instrument Men Needed *MORE THAN EVER*

LOOK at the multitude of instruments in today's planes. THINK of the tremendous number of planes now being built at top speed for our huge, permanent air forces . . . and for our ever-expanding airlines . . . and private flying.
No wonder instrument technicians are in URGENT demand by aircraft plants, instrument manufacturers, and airlines. No wonder there are hundreds of U. S. Civil Service openings in instrument work at the huge Army and Navy aircraft maintenance depots—good civilian jobs that this school's graduates are getting because their 6 months' training serves as COMPLETE substitution for the 2 years' actual experience usually required by the Civil Service Commission.

Graduates Pleased
"I wouldn't exchange places in any other department of aircraft maintenance." (R.S.)
"I was never happier or better satisfied in my life . . . For once in my life the future really looks bright." (W.C.)

ALL divisions of Aviation are calling for more trained men than this oldest and largest instrument school can supply for months ahead. Most complete training, taking in all Sperry gyroscopic instruments, including automatic pilot. For full details on this fascinating lifetime career, send coupon NOW.

CAA-approved instrument repair station No. 1028

AMERICAN SCHOOL of AIRCRAFT INSTRUMENTS
Oldest Largest
3903 SAN FERNANDO ROAD, Dept. A-12
GLENDALE (LOS ANGELES COUNTY), CALIFORNIA
Please send complete information on aircraft instrument careers, and on your specialized training courses.
Name_____ Age____
Address_____
City_____ State____
A-12

Prepare for a Well Paid Career in—
AERONAUTICAL ENGINEERING!

DEGREE IN 2¼ YEARS

Degree in 108 Weeks. Course complete in minimum time at least expense. Provides thorough training for extraordinary opportunities in Government and industry. Modern wind tunnel, latest equipment.

Prepare for U. S. Army Flying Cadet Corps in shortest possible time—completion of one-half of any degree course exempts you from written examination. Approved by Civil Aeronautics Administration for primary and secondary flight training.

World Famous also for courses in Civil, Electrical, Mechanical, Chemical and Radio Engineering; Business Administration and Accounting. Special preparatory department for those who lack required high school work.

Demand For Tri-State Graduates greater than supply. Students from all parts of the world. Enter Jan., March, June, Sept.

Write for catalog 9121 College Avenue, Angola, Ind.

TRI-STATE COLLEGE Founded in 1884

See **SCHOOL ADVERTISING INDEX** *on page 258*
for additional schools & flying instruction

***NATIONAL* CLASSIFIED ADVERTISING**
— at your service for bringing business needs or "opportunities" to the attention of men associated in administrative, executive, management, sales and responsible technical engineering and operating capacities with the industries served by McGraw-Hill publications:

The SEARCHLIGHT SECTIONS (CLASSIFIED ADVERTISING) of . . . . . *Departmental Staff*
McGRAW-HILL PUBLISHING CO., INC.
330 W. 42nd St., New York City

American Machinist
Aviation
Bus Transportation
Business Week
Chemical & Metallurgical Engineering
Coal Age
Construction Methods
Electrical Contracting
Electrical Merchandising
Electrical World
Electronics
Engineering News-Record
Engineering and Mining Journal
E & M J Markets
Factory Management & Maintenance
Food Industries
Power
Product Engineering
Textile World
Transit Journal

ADVERTISERS IN THIS ISSUE

Academy of Aeronautics 74
Actus Products Corp. 238
Adel Precision Products Corp. Insert 38 & 89
Aero Industries Technical Institute .. 239
Aeroquip Corp. 125
Aero Tool Co. 136
Aircooled Motors Corp. 181
Aircraft Tools, Inc. 248
Airesearch Mfg. Co. ..... Insert 94
Allen Co., L. B. 252
Allied Aviation Corp. 251
Allison Engineering 197
Alrose Chemical Co. 187
Aluminum Co., of America 143
American Air Filter Co., Inc. 99-260
American Automatic Electric Sales Co. 249
American Cable Division of American Chain & Cable Co., Inc. 205
American Chain & Cable Co., Inc. 205
American Steel & Wire Co. 24-84-85
Ampco Metal, Inc. 245
Angle Steel Stool Co., Inc. 198
Arens Controls, Inc. 102
Armstrong Bros., Tool Co. 100
Aviation Market Place 254-257

Bausch & Lomb Optical Co. 248
Beech Aircraft Corp. 30
Belden Mfg. Co. 35
Bell Aircraft Corp. 175
Bendix Aviation Ltd. 27-31
Bendix Products Co., Inc. 46-228
Bendix-Radio 118-119
Berry Brothers 203
B. G. Corp., The 227
Boeing Airplane Co. 163
Boeing School of Aeronautics 39
Bonney Forge & Tool Works 173
Boots Aircraft Nut Corp. 158
Boston Auto Gage Co. 100
Bower Roller Bearing Co. 33
Brewster Aeronautical Corp. 233
Buckeye Portable Tool Co., The 101
Bunting Brass & Bronze Co., The 4-5

Cal-Aero Academy 19
Carnegie-Illinois Steel Corp. 24-84-85
Casey Jones School of Aeronautics ... 74
Champion Aviation Products 252
Chandler Evans Corp. 26
Clare & Co., C. P. 250
Clark Tructractor 131
Columbia Steel Co. 24-84-85
Consolidated Aircraft Corp. 18
Cuno Engineering Co., The 230-231
Curtiss Airplane ..... 25-207 and Insert 71
Curtiss Mfg. Co. 157
Curtiss Propeller ..... 25-207 and Insert 71
Curtiss-Wright Corp. ..... 25-207 and Insert 71
Curtiss-Wright Technical Institute .. 11

Dallas Aviation School & Air College 211
Darnell Corp., Ltd. 244
Davison Chemical Corp., The 29
Dearborn Chemical Co. 166
Denison Engineering Co., The 168
Douglas Aircraft Co., Inc. 195
Dow Chemical Co., The ..... Third Cover
Dowty Equipment Corp. 127
Drake Mfg. Co. 246

Eclipse Aviation ..... Back Cover
Elastic Stop Nut Corp. 149
Electric Auto-Lite Co., The 7
Electronic Laboratories 95
Embry Riddle School of Aviation 182

Fafnir Bearing Co., The 9
Fairchild Engine & Airplane Corp. 10

Federal Aircraft Works 252
Federal Bearings Co., Inc., The 20
Fleetwings Inc. 21
Florsheim Shoe Co., The 22
Formica Insulation Co., The 224
Four Wheel Drive Auto Co., The 16-17

General Controls 132
General Electric Co. 193-236
General Fireproofing Co., The 189
General Tire & Rubber Co., The 201
Goodrich Co., The B. F. 171
Goodyear Tire & Rubber Co., Inc., The 68-69
Govro-Nelson Co., The 244
Greenfield Tap & Die Corp. 179
Grumman Aircraft Engineering Corp. 152
Guardian Electric 247
Gulf Oil Corp. 78

Hall Mfg. Co. 28
Hamilton Steel Co., The 246
Hansen Mfg. Co. 103
Hydraulic Press Mfg. Co., The 209

Independent Pneumatic Tool Co. 217
Industrial Gloves 252
Intercontinent Aircraft Corp. 219
International Flare Signal 249
International Nickel Co., Inc., The .. 225
Interstate Aircraft & Engineering Corp. 144

Jacobs Aircraft Engine Co. 114
Jacoel Cable Splicing Equipment Co., I. 252

Keuffel & Esser Co. 135
Kilgore Mfg. Co., The 249
Kinnear Mfg. Co., The 172
Kinner Motors Inc. 13
Kollsman Instrument Division of Square D. Co. 151

Laminated Shim Co., Inc. 192
Linde Air Products Co. 169
Littelfuse, Inc. 252
Lockheed Aircraft Corp. ..... Insert 36-37 and 259
Luscombe Airplane Corp. 136
Lyon Metal Products Inc. 237

Mallory & Co., Inc., P. R. 12
Martin Co., The Glenn L. 6
McGraw-Hill Book Co., Inc. 146, 242, 247
Micro Switch Corp. 229
Mid-State Mfg. Co. 102
Miller Co., The 129
Miller, Rubber Co., Inc. 194
Mira-Loma Academy 19

National Vulcanized Fibre Co. 253
New Departure 154
Norma-Hoffmann Bearings Corp. 88
North American Aviation, Inc Insert 90-93

Ohio Seamless Tube Co., The 79
Onsrud Machine Works Inc. 103
Ozalid Products 165

Packard Electric 234
Partridge & Co., Ltd., Alfred 252
Penn Metal Corp., of Penna 196
Pioneer Instrument 40
Piper Aircraft Corp. 3
Polaris Academy 19

Potter Inc., L. 241
Pressed Steel Co., The 243
Pump Engineering Service Corp. 199
Purolator Products Inc. 223

Raybestos 241
Ray Day Piston Corp. 248
Raymond Mfg. Co. 249
Reading Batteries Inc. 183
Republic Aviation Corp. 42
Reznor Mfg. Co. 253
Roebling Sons Co., John A. 167
Romec Pump Co. 102
Roosevelt Aviation School 240
Ryan Aeronautical Co. 191
Ryerson & Son, Inc., Joseph T. 249

Schatz Mfg. Co., The 213
Schauer Machine Co. 246
Scintilla Magneto Co. 244
Seiden Pneumatic Tool Co. 251
Sheffield Corp., The 202
Shell Oil Co., Inc. 132
S.K.F. Industries Inc. 221
Snap-On Tools Corp. 34
Solar Aircraft Co. 243
Soss Mfg. Co. 170
South Bend Lathe Works 185
South Bend Tool & Die Co. 238
Spartan School of Aeronautics 32
Speedway Mfg. Co. 250
Spencer Thermostat Co. 220
Square D Co., Kollsman Instrument Division 151
Stackbin Corp. 102
Standard Aircraft Products Inc. 100
Standard Pressed Steel Co. 8
Starrett & Co., Inc., The L. S. 200
Struthers Dunn Inc. 212
Sugar Beet Products Co. 246
Sunnen Products Co. 226
Synthane Corp. 177

Tannewitz Works, The 234
Texas Co., The 44
Thompson Grinder Co., The 97
Thompson Products Inc. ..... Second Cover
Thurston Harris, W. 251
Tinnerman Products Inc. 23
Titanine, Inc. 252
Torrington Co., The 232
Triplett & Barton Inc. 106
Turco Products Inc. 239

Union Carbide & Carbon Corp. 169
United Aircraft Corp.
Pratt & Whitney Aircraft .. Front Cover
Vought-Sikorsky Aircraft 138
United States Plywood Corp. 240
United States Steel Corp., Subsidiaries 24-84-85
United States Steel Export Co. 24-84-85

Vard Mechanical Laboratory ... Insert 112
Veeder-Root Inc. 253
Vickers Inc. 122

Waco Aircraft Co. 235
Warner Aircraft Corp. 128
Weatherhead Co., The 215
Wellington Sears Co. 248
Wellman Bronze & Aluminum Co., The 236
Westinghouse Elec. & Mfg. Co. 14-15
Where To Buy 252
Williams & Co., J. H. 245
Wilson Co., The H. A. 222
Wittek Mfg. Co. 101
Wright Aeronautical Corp. ..... 25-207 and Insert 71
Wyman-Gordon 242

SCHOOLS

Academy of Aeronautics 74
Aero Industries Technical Institute 239
American School of Aircraft Instruments 257
Boeing School of Aero 39
Cal-Aero Academy 19
Casey Jones School of Aero 74
Curtiss Wright Technical Institute 11
Dallas Avia. School & Air College 211
Embry-Riddle School of Aviation 182
Luscombe School of Aeronautics 257
Mira-Loma Academy 19
Polaris Academy 19
Rising Sun School of Aero 257
Roosevelt Aviation School 240
Ryan Aeronautical Institute 257
Spartan School of Aero 32
Tri-State College 257

AVIATION'S MARKET PLACE

(CLASSIFIED ADVERTISING)

AVIATION PUBLISHERS 221
BOOKS 254-255
EMPLOYMENT (Positions Wanted and Vacant) 254-255
EQUIPMENT & PRODUCTS 254
FOR SALE (Used Planes) 254-255-256
PROFESSIONAL SERVICES 255
INDEX of Planes, Engines and Parts For Sale 254

(CLASSIFIED DISPLAY ADVERTISING)

Aircraft Exporting Corp. 256
Lancaster Allwine & Rommel 255
LaTour Aeronautical Sales 256
McDonald Aircraft Corp. 255
Ort, Karl 256
Pan American Navigation Service 255
Pester's Propeller Service 256
Philadelphia Rust Proof Co. 256
Pratt & Whitney Aircraft 255
Question Air System 255
Seaboard Aircraft Sales 256
Simmonds Aerocessories, Inc. 255
Snyder Aircraft Corp. 256
Standard Aircraft Equipment Co. 256
Vimalert Co., Inc., The 256
Wings Field, Inc. 256

from the Employees of Lockheed — Christmas 1941

The American Aircraft Industry produced a lot of airplanes at an ever-increasing tempo during the first nine months of 1941. It actually expanded 900% over the same period a year ago. The count isn't in for the *whole* year yet, but our pace—our output—continues to forge ahead.

There's one real reason for this record—and that's because our hearts are in our jobs . . . but we're not different from any other men in American industry.

We do think however, Americans everywhere should know these aviation facts:

1. No industry in the history of the world has expanded so fast—EVER.

2. No industry has ever expanded so—with no sacrifice of quality in product.

3. No industry has EVER so led the world in performance, stamina, speed, of product.

4. No country—England, Germany—*any* country—produces better airplanes of any type—big bombers—medium or light or

THE TURNING OF THE TIDE

dive bombers—interceptors or pursuits.

These are strong statements. But we can make them honestly, without boasting; it's been a cooperative job. We've had to make changes and we've learned a lot. We've worked with Washington and Dayton—with OPM—the engine men—with the Army and the Navy. We've fought with them too—but that's the healthy way of getting the best from the best country in the world. But mind you we've fought *with*—NOT *against* them, and they with us, *not* against us. Without them we would have accomplished little.

Now, the gearing up—the speeding up—is well on its way. Now—REAL production is rolling. Now 'planes to turn the tide are being delivered in fast-increasing quantities.

And from it all we are learning so much that it seems almost unbelievable. Military necessity has taught us new wing structures—new aerodynamics that doubtless will be applied to the design of post-war airplanes for you—for the world. And military production techniques are teaching us how to make them cheaper—faster—stronger.

That's why we know that permanent good is coming from this emergency. That's why our jobs are good jobs. That's why we anticipate a future of peace on earth—a future industry that will make your lives—our lives—more prosperous and happy.

LOCKHEED AIRCRAFT CORPORATION · BURBANK CALIFORNIA

★

AAF ENGINE INTAKE FILTER PERFORMANCE

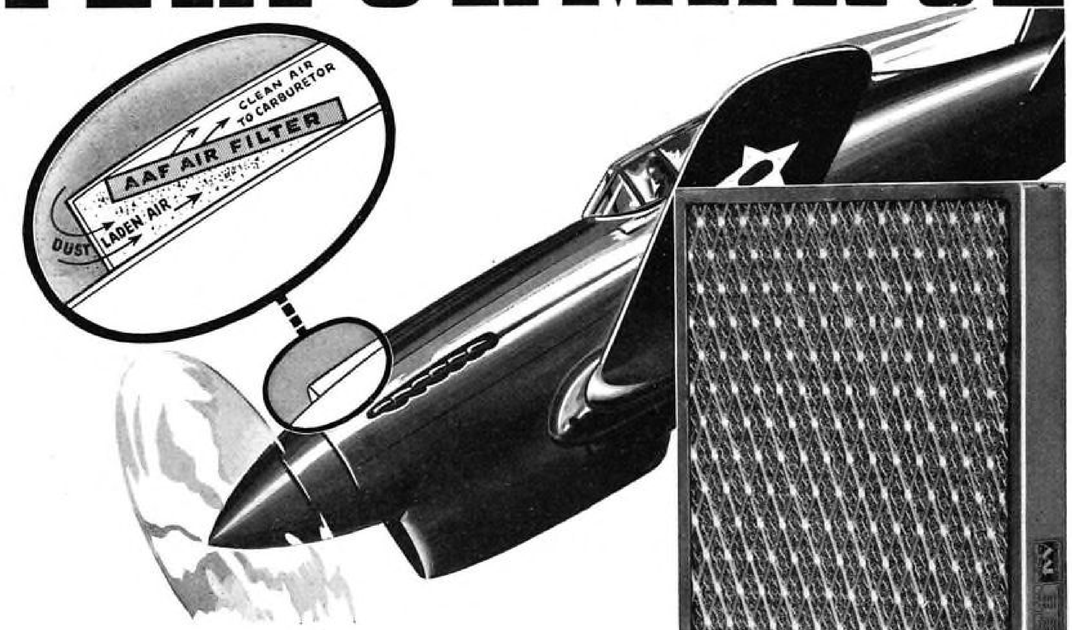

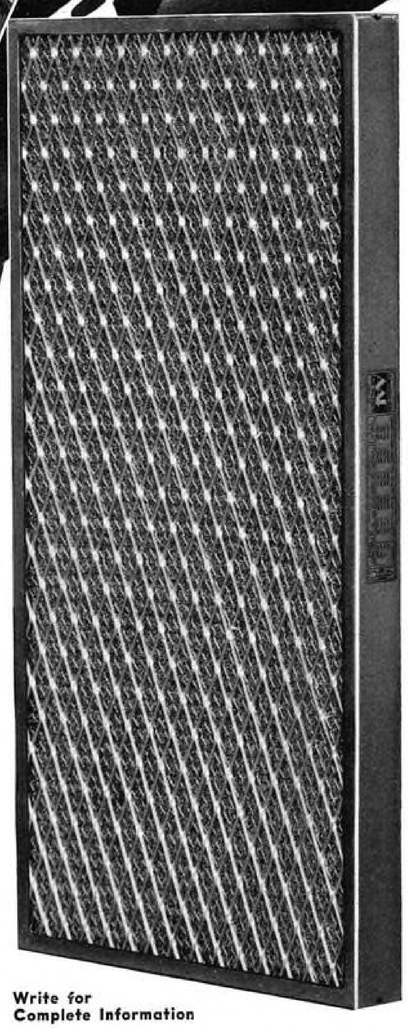

BACKED BY 22 YEARS OF AIR FILTER EXPERIENCE

The need for aircraft engine intake air filters is universally recognized. The remaining consideration, therefore, is the selection of the RIGHT filter to do the job.

In air filter engineering and construction as in the manufacture of airplanes, experience is the greatest teacher. For over 22 years the American Air Filter Co. has built air filters for every air cleaning need, and as a result of this experience is able to furnish engine intake filters which not only meet airplane construction requirements but specifications of the Army Air Corps as well. Write for complete information and free Technical Report #306.

AMERICAN AIR FILTER CO., INC.
Incorporated
331 Central Ave. Louisville, Ky.

Write for Complete Information

AAF FILTERS FOR AIRPLANE ENGINES

DOWMETAL MAGNESIUM

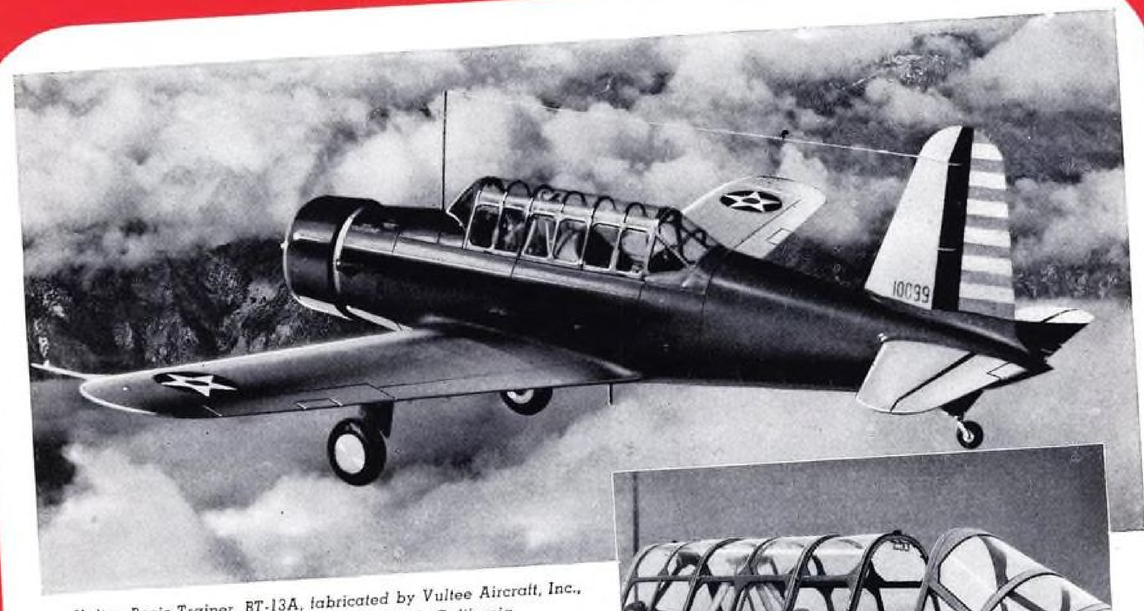

Vultee Basic Trainer, BT-13A, fabricated by Vultee Aircraft, Inc., Vultee Field Division, Vultee Field, California

VULTEE CANOPY FRAMES OF EXTRUDED PARTS

The use of magnesium alloys in the extruded form is progressing rapidly. In airplane construction, for example, such parts include extruded sections of DOWMETAL* for seats, panel stiffeners, fillers, various cabin parts and for canopy framing, such as the cockpit canopy for the Vultee Basic Trainer BT-13A, shown above.

DOWMETAL, unique as a weight-saving metal, is readily fabricated by all the usual methods. Technical data is available. Dow invites consultations.

*Trade Mark Reg. U.S. Pat. Off.

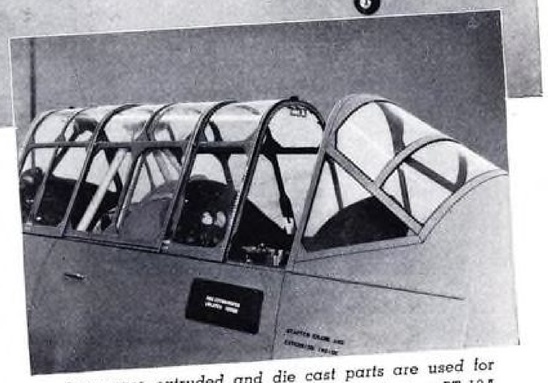

DOWMETAL extruded and die cast parts are used for the cockpit canopy of the Vultee Basic Trainer BT-13A

A CITATION OF USEFULNESS

It is gratifying to Dow that magnesium is playing such a vital role in the furtherance of our security program. Millions of pounds of this metal, produced by Dow, are now going into aircraft and other defense equipment. Placement on the priority list is, truly, a citation of distinction—evidence of indispensable usefulness which industry understands and appreciates.

THE DOW CHEMICAL COMPANY
MIDLAND MICHIGAN
New York City, St. Louis, Chicago, San Francisco, Los Angeles, Seattle, Houston

CASTINGS • FORGINGS • SHEET • STRIP • PLATE • EXTRUSIONS

TRADE MARK DOWMETAL MAGNESIUM ALLOYS

LIGHTEST OF ALL STRUCTURAL METALS

Eclipse Aircraft Accessories

Precision-Built and Performance-Tested for Dependable Service

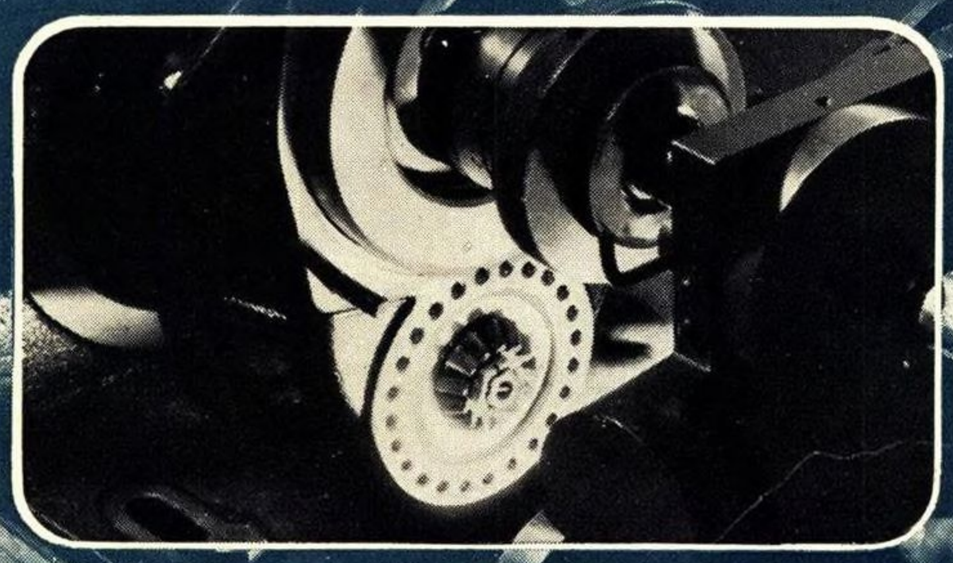

Starter Clutch Breakaway Test—Eclipse Production Test Department.

Ruggedly constructed to meet the most exacting requirements of military and commercial service, Eclipse Aircraft Accessory Units are dependable and efficient under all normal operating conditions. To maintain the high Eclipse standards of performance and reliability, it is essential that specified installation, operation and maintenance procedures be observed.

Authorized Eclipse Service Stations, manned by personnel skilled in the maintenance of Eclipse products, are available with proper tools and test facilities for overhaul and periodic servicing.

A complete factory service repair department and a competent staff of field service engineers also stand ready to assist in the handling of maintenance problems.

Eclipse Aircraft Accessory Equipment: Engine Starters, Solenoid Switches, Booster Coils, Control Switches, Generators and Control Boxes, Radio Dynamotors, Supercharger Regulators, Electric Retracting Motors, Propeller Anti-Icer Pumps, Mechanical De-Icer Equipment, Air Pumps, Air Valves, Oil Separators, Hydraulic Pumps, Ammunition Rounds Counters and Contactors, Synchroscope, Fuel Flowmeters, Seamless Flexible Metal Hose, Ordnance Equipment, Magnesium, Aluminum and Non-Ferrous Sand Castings.

ECLIPSE

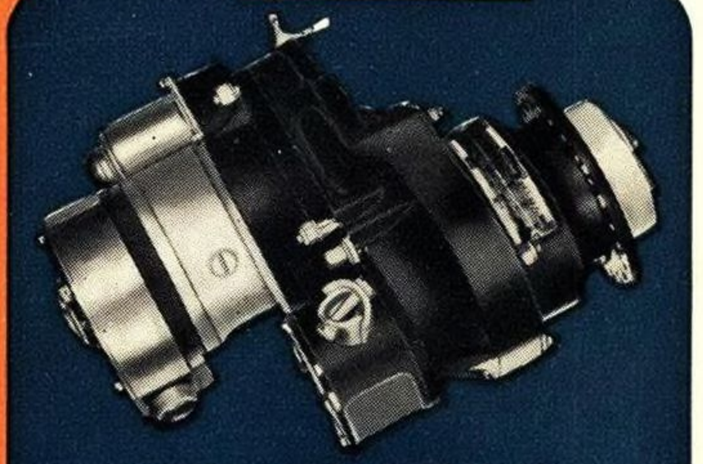

Series 41 Direct Cranking Electric and Inertia Starter.

ECLIPSE AVIATION

DIVISION OF BENDIX AVIATION CORPORATION

BENDIX, NEW JERSEY, U. S. A.

LET'S GO! U.S.A. · KEEP 'EM FLYING!