ANNUAL MAINTENANCE NUMBER

In this Issue
MAINTENANCE PROBLEMS IN GLOBAL WARFARE

DEC. 1942

I.C.C.

AVIATION

The Oldest American Aeronautical Magazine

McGraw-Hill Publishing Company, Inc.

Price 50c. per copy

NAVY AIR TRANSPORTS
fly the Seven Seas

A fleet of Consolidated PB2Y Coronados is now helping the Naval Air Transport Service to deliver tons of supplies daily to Australia, Alaska, England and Africa.

Large fleets of long-range land planes and flying boats are also joining the Service, bearing such famous names as Consolidated, Curtiss-Wright and Douglas. All these, like the Coronados, are being powered by dependable Pratt & Whitney engines.

PRATT & WHITNEY AIRCRAFT
EAST HARTFORD, CONNECTICUT
ONE OF THE THREE DIVISIONS OF UNITED AIRCRAFT CORPORATION

Helping deliver a 185,000 Fighting Plane Order

OVER a thousand different parts for aircraft are produced in Thompson plants. The output of these precision parts is fifteen times that of the greatest peacetime production. It will rise much higher as additional new plant facilities, now on the way, go into action.

This wartime impetus of more productive machines, skilled man-power and innovations in parts, engineering, and manufacturing will carry over into the peace era which will follow victory, advancing the entire field of internal combustion power.

THOMPSON PRODUCTS, INC., Cleveland, Ohio.

Thompson Products

AVIATION

NUMBER 12 VOLUME 42

DECEMBER, 1942

Annual Maintenance Issue

REGULAR EDITION

Contents

George W. Pfeil ..... *Publisher*
Leslie E. Neville ..... *Editor*
Clinton B. F. Macauley
Acting Managing Editor
E. Eugene Miller ..... *Assistant Editor*
John Foster, Jr. ..... *Assistant Editor*
Herbert F. Powell ..... *Assistant Editor*
Blaine Stubblefield ..... *Washington Editor*
W. W. MacDonald ..... *Radio Editor*
Paul Wooton ... *Chief of Washington Bureau*
Financial Editors
Selig Altschul ..... Raymond Hoadley

★ ★ ★

On Leave of Absence With Government Services
Carl Norcross ..... *Major, Air Forces*
Charles F. McReynolds
Squadron Commander, Air Force;
Jap P. AuWerter ..... *Lieut., Air Forces*
Randolph Hawthorne ..... *Lieut., Air Forces*
Kenneth D. Reynolds ..... *Lieut., Infantry*
Don Fink ..... *Special Assignment*

★ ★ ★

District Managers: New York and Boston, Robert F. Boger; Philadelphia, G. A. Ahrens; Cleveland, A. H. Bartsch; Detroit, C. W. Evaul; Chicago, A. B. Martin; Los Angeles, R. N. Phelan; San Francisco, John Otterson

In This Issue 5
Editorial: The War Is Not Yet Won 93
AVIATION's War Communique No. 12 94

Maintenance Features

Assembling and Testing P-40's in Burma ..... Byron A. Glover 96
It's Like the Old Shoe—It Fits ..... Paul E. Richter 102
We Learned War Maintenance With the AVG ..... Tye Lett, Jr. 104
Designing for Easy Maintenance ... J. A. Knox and J. J. Boericke 108
AVIATION's 1942 Maintenance Awards 113
World Cargo Takes to the Air ..... Donald S. Sprague 114
Fighting the Aircraft Maintenance War ..... Reagan C. Stunkel 118
Adapting Assembly Line Techniques to Engine Overhaul 120
Bringing Field Experience Back to the Plant ..... Frank H. Lyons 124
Womanpower in Maintenance Shops ..... C. N. (Jimmy) James 126

AVIATION's Maintenance Notebook 129

Landing Gear Assembly Fixture ... 130
One-Man Mobile Platform 131
Collector Ring Aligning Jig 131
Assembly Line Technique in Maintenance Shop 132
Portable Paint Stand 133
Rocker Arm Socket Remover 134
Salvaging Cowl Flap Brackets 134
Wheel Brake Assembly Jig 135
Exhaust Pipe Repair Jig 136
Fast Valve Grinding Machine 136
Aileron Control Stop 137
Heavy Duty Jack 137
Mechanical Tire Iron 138
Engine Mount Alignment Jig 139
Test Stand Simulates Flight 139
Turret Fixture For Engine Lathe ... 140
Tire Removing Fixture 141
Tappet Ball Socket Remover 141
For Better Braking 142
Wheel Bearing Greaser 142
Turn & Bank Test Stand 143

Aviation Manufacturing

Production—Design—Research—Engineering ... Complete Index 145
Design Considerations for Plywood Structures ... L. J. Marhoefer 146
Aircraft Hydraulic Accumulator Systems ..... Edward M. Greer 150
Fabricating Drop Hammer Dies, Chris J. Frey and Stanley S. Kogut 158
Standards Program Keyed to War Needs ..... Glen M. Aron 165
White Floors Light Those Under-Wing Shadows ..... F. L. Mabie 166
Review of Patents ..... A. Harry Crowell 175
AVIATION's Sketch Book of Design Detail 176
AVIATION's Engineering Data Book 183
Subcontractors Section: Boosting Bomber Output .. T. J. Dunnion 221

New Products

Information Tips on Aviation Publications 188
Latest Machine Tools 189
Shop Equipment and Accessories 198

Military

How Our Navy Gears Pilots for War ... Lt. (jg.) Fred Tupper, Jr. 239
Black Light for Night Flight 243

Air Transport

Developing Wider Cargo Markets ..... Robert K. Kinzel 244
Securing Means for Air Cargo ..... Col. E. S. Evans 356
Designing Better Cargo Planes ..... Charles Froesch 363
Aviation's Future Trends ..... Selig Altschul 249

Civil Operation and Training

Civil Air Patrol Completes Year of Service .. Maj. Earle L. Johnson 250

Flying Equipment

Design Details of the BMW-801A Engine, Part II .. Myles V. Cave 256
Two New Stinson Warplanes 261
Boeing AT-15 Bomber Crew Trainer 263

The Aviation News

National Aviation 269
Washington Windsock 273
Calling Names 274
Aviation Manufacturing 277
Assembly Lines 278
Transport Aviation 282
Aviation Abroad 287
Aviation People 291
Finance ... Raymond Hoadley 293
Book Reviews 297

McGRAW-HILL PUBLISHING CO., INC. Publication office 99-129 North Broadway, Albany, N. Y. **Editorial and executive offices, 330 West 42nd Street, New York, N. Y.** Branch offices: Chicago, 520 North Michigan Ave.; San Francisco, 68 Post Street; Aldwych House, Aldwych, London, W.C. 2; Washington; Philadelphia; Cleveland; Detroit; Los Angeles; St. Louis; Boston; Atlanta. JAMES H. McGRAW, Founder and Honorary Chairman; JAMES H. McGRAW, Jr., President; HOWARD EHRLICH, Executive Vice-President; MASON BRITTON, Vice-President; B. R. PUTNAM, Treasurer; JOSEPH A. GERARDI, Secretary; J. E. BLACKBURN, Jr., Director of Circulation, Aviation, 330 West 42nd Street, New York. Published monthly, price 50c a copy, 50c in Canada. Allow at least ten days for change of address. All communications about subscriptions should be addressed to Director of Circulation, 330 West 42nd Street, New York. Subscription rates—United States, Mexico and Central American Countries, $3.00 a year, $4.00 for two years, $5.00 for three years. Canada, $3.50 for one year, $5.00 for two years, $6.00 for three years, payable in Canadian currency at par. Great Britain and British Possessions 30 shillings per year, 60 shillings for three years. All other countries $5.00 a year, $10.00 for three years. Entered as second-class matter, September 3, 1936, at the Post Office, Albany, New York, under the Act of March 3, 1879. Volume 42, Number 12. Printed in U. S. A. Cable address: "McGrawhill New York." Member of A.B.C. Copyright 1942 by McGraw-Hill Publishing Company, Inc., 330 West 42nd Street, New York, N. Y. The contents of this issue are copyrighted and may not be reproduced without the permission of the copyright owner. The following publications are combined with AVIATION: AERONAUTICAL ENGINEERING AIRCRAFT JOURNAL and THE AVIATION NEWS. All rights to above names are reserved by the McGraw-Hill Publishing Co. Aviation is indexed in Guide to Periodical Literature and in Industrial Arts index.

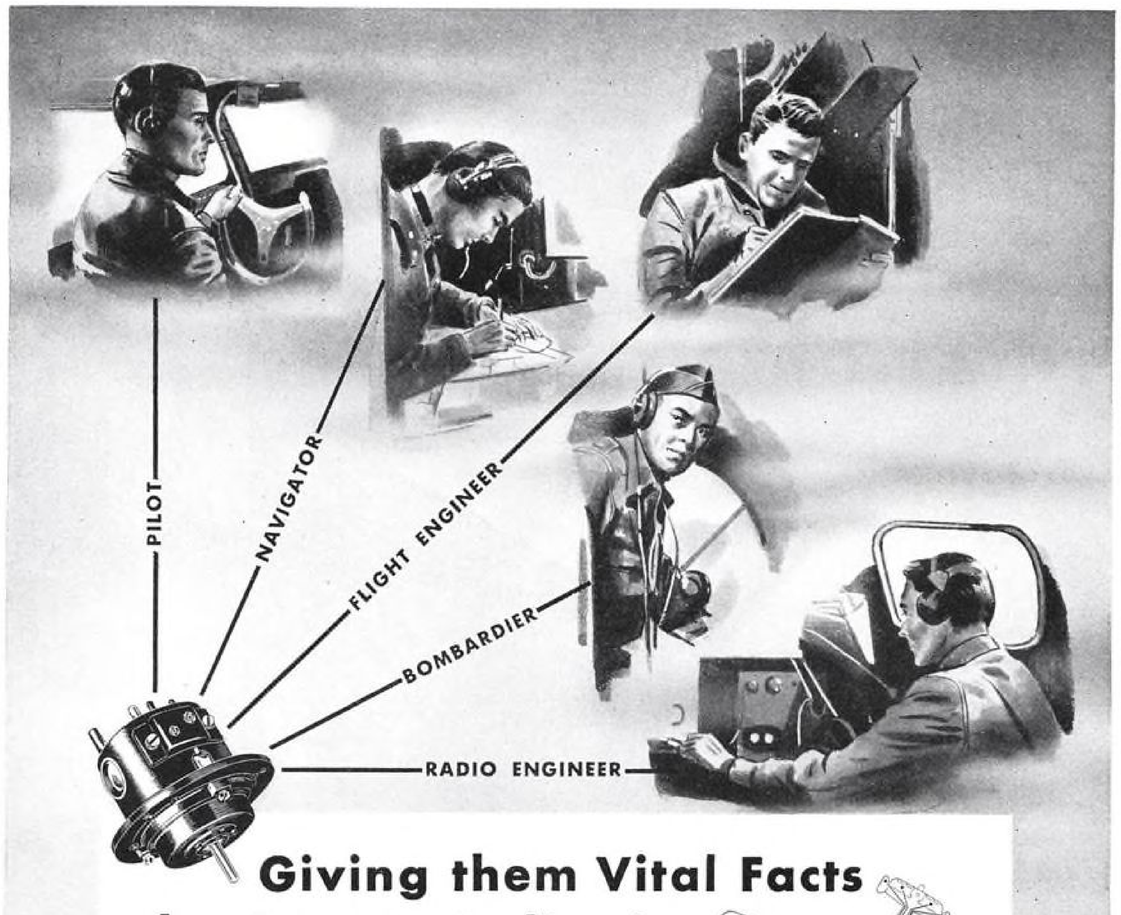

Giving them Vital Facts by *Remote Indication*



SWIFT, intelligent action on the part of a combat plane's crew must be based on facts accurately determined and quickly conveyed. Obtaining and transmitting such information...from many vital points throughout the plane...is the important job entrusted to the "PIONEER AUTOSYN" System.

Incorporated in precision instruments in tail, flaps, landing gear, engines, fuel tanks and other parts of the plane, are "PIONEER" Transmitter "AUTOSYN" units like the one illustrated. These small, ingenious mechanisms transmit exact measurements. Receiving "AUTOSYN" units at desired points provide exact readings. The whole system operates through low voltage wiring, eliminates long shafts and heavy, cumbersome tubing carrying dangerous liquids or fumes.

"PIONEER" Flight, Navigation and Engine Instruments are designed and built by men and women whose single aim is to give our flyers the finest equipment obtainable.

Precision aircraft instruments of the Pioneer Instrument Division are important members of "The Invisible Crew," which includes the equipment and controls built by 25 Bendix plants from coast to coast and serving with our fighting crews on every front.

THE INVISIBLE CREW
Precision Equipment by Bendix
AVIATION CORPORATION

PIONEER INSTRUMENT DIVISION

★ ★ IN THIS ISSUE ★ ★

OUR DISTINCTIVE operating feature of AVIATION—the Maintenance Notebook—is presented in this issue in an improved and expanded form.

It covers the whole field of aircraft maintenance—military, airline, and civil. It is a graphic compendium of new ideas and advanced methods for busy maintenance executives and engineers.

Dealing with airplanes, engines, propellers, accessories, and equipment, it has been especially collated to impart the maximum of useful information in a minimum of time.

An up-to-the-minute installment of the Maintenance Notebook—in this new format—will appear in the Maintenance Section of every succeeding issue of AVIATION.

Fighting-Front Maintenance

Throughout this warring world, maintenance of aircraft is a prime problem posing riddles which "square in ratio" to the distance from the factory. Yet staggering though these problems are, Yank maintenance men are meeting them with ingenuity in the face of adverse conditions of climate and despite the poor quality of native labor and equipment.

How they are doing it is pointedly revealed in two special features—Assembling and Testing P-40's in Burma, by Curtiss-Wright Test Pilot Byron A. Glover, who was "right on the ground in Rangoon," (page 96), and We Learned War Maintenance With the AVG, by Tye Lett, Jr., overseas representative of Allison, who played a leading field role with the Flying Tigers (page 104).

Paralleling these problems of the Orient are the heavy supply and maintenance burdens being shouldered by our aero servicemen in the many other fighting corners of the globe. On page 114, Donald S. Sprague, Douglas service expert, "pilots" us to Africa in his revealing feature, World Cargo Takes to the Air—shows us how the Air Transport Command is banishing the darkness from Dark Continent skies.

Meanwhile, the war must likewise be fought on the home front, and here we herald the significant contributions of the airlines. Comes the pertinent question: Is airline maintenance as good as it was before? "Yes", emphasizes Executive Vice-President Paul Richter, of TWA. "It's more than 'as good'—it's better than ever," he declares in his very forthright article, titled It's Like the Old Shoe—It Fits (page 102).

Our Airline Awards

Fact is, airline maintenance is at such a spirited "high" that it was a most stringent task for the publishers to determine this year's winner of AVIATION's annual awards for outstanding airline maintenance performance. But out of the strong field, two lines were flagged in—photo-finish fashion—to win the AVIATION plaques. Which two? See page 113, where the full story is told.

Next, the Aviation Manufacturing Section deals comprehensively with the complex design aspects of these paramount questions, with J. A. Knox and J. J. Boericke offering a wealth of practical approaches in Designing for Easy Maintenance (page 108). And the necessary liaison between the factory and front is recorded, in all its phases, by Frank H. Lyons. His excellent article, Bringing Field Experience Back to the Plant, is presented on page 124.

***Robert K. Kinzel** author of Developing Wider Cargo Markets (page 244), was struck by the great possibilities of air express when, during a South American trip, he saw mining machinery flown into the Andes and later, in Buenos Aires, ate lobsters which had been air-delivered from Chile. Today, as assistant to the express traffic manager of PAA, he still feels the same about air express—only more so. After whisking through Columbia College's four-year course in three, he traveled Europe and South America like a Marco Polo, and he's been to so many out-of-the-way places that he seldom needs to consult a map. Above all, he likes to think ahead to the coming peacetime "when," he says, "Airex will really start to grow."*

BOX SCORE: 14 to 1

Striking record of 141 enemy aircraft downed against a Yank loss of but 10—a solid 14 to 1—was chalked up by American combat flyers in October, according to Under Secretary of War Robert Patterson.

Guadalcanal: Japs lost 310 planes to Yanks' 62—exactly 5 to 1—in first 78 days of occupation (Aug. 7 to Oct. 23). Highlight was destruction of an entire squadron of 20 "Zeros," with no American losses, on Oct. 23.

India: U. S. 10th Air Force shot down 39 Japs, plus 13 "probables," during month of November.

Middle East: Axis lost 45 warplanes against Yanks' 6 (7½ to 1) in pre-invasion period Oct. 1 to Nov. 5.

Further thorough-going design studies packed with "whys" and "hows" are Design and Installation Factors for Aircraft Hydraulic Accumulator Systems, by Edward M. Greer (page 150), and Design Considerations for Plywood Structures, by L. J. Marhoefer (page 146). The latter feature is the second in the author's special series.

Standards Promoted

How the aviation industry is meantime pacing its tremendous growth since Pearl Harbor with consistent progress relating to standardization and interchangeability is told by Glen M. Aron in his analytical report Aircraft Standards Committee Program Keyed to War Needs (page 165).

Feature in the military department is How Our Navy Gears Pilots for War, by Lieut. (jg) Fred Tupper, Jr., (page 239). And in Civil Air Patrol Completes Year of Service (page 250) Maj. Earle L. Johnson tells the striking story of the CAP's great home-front contributions.

Coming

IN JANUARY, an outstanding feature of AVIATION will describe an automatic engine synchronization system developed for multi-engine equipment. George W. Brady, chief engineer, and Marvin Meyer, project engineer, both of Curtiss-Wright Propeller Division, have collaborated on an engineering article which should prove a milestone in the development of aircraft propeller controls.

Another feature will summarize the aviation industry's magnificant war accomplishments. Metallizing for better maintenance, flight strips, and lofting at Northrop are but a few of the other subjects which will be covered by authorities in these fields for AVIATION's readers.

"HELL ON WHEELS"

THAT'S OUR DISH

When you're under fire, you can't limit a ship to the designer's ideal . . . a tactical mission or split-second combat may create conditions beyond the foreseen. An alarm for a sudden take-off—or a critical landing on whatever is below can mean "hell on wheels" . . . and Hayes Wheels and Expander Tube Brakes are facing this in line of duty. And taking it. Performance reports prove it.

Why? — because for Hayes equipment, "flying" starts way back in the factory. It goes through the design rooms, the test lab, the precision manufacture—all developed in step with aircraft advances through long years of civil and military use. (Every Expander Tube brake in use in the United States is a Hayes product—Hollerith designed and improved.)

So when these wheels and brakes roll onto the flying fields of the world, they are **veterans.**

ARMY NAVY

Aircraft Men Know the Reason For this at our plant

Representatives—
Western: AirSupply Co., 5959 W 3rd Street, Los Angeles.
Eastern: J Henry Reisner, Hagerstown, Md.
Illustration—Boeing B-17, "Flying Fortresses" with Hayes wheels and brakes.

HAYES AIRCRAFT WHEELS AND BRAKES . . .

HAYES INDUSTRIES, INC. Home Office: JACKSON, MICHIGAN, U. S. A.

There's a Place for YOU in American Aviation

UNCLE SAM needs airmen! He needs them NOW . . . to help win the war. He needs them for the FUTURE . . . to carry on the huge aviation industry that victory will bring.

This great need is your opportunity . . . for there is a place for YOU in American aviation! Whether you enter the Army or Navy Air Forces, the Civil Air Patrol or the Civilian Pilot Training Program . . . you will help your country. And, at the same time, you will develop skills that assure your success in the mighty air age of the future.

Prepare to take your place in American aviation! Learn to fly now! It's easy . . . especially in the famous Piper Cub Trainer.

You can learn to fly with as little as 8 hours of dual instruction, if you are in normal health and possess normal judgment . . . whether you're sixteen or sixty.

Visit your Piper Dealer at your local airport. He will gladly give you a flight demonstration and tell you how to become a pilot now!

FREE BOOKLET ON HOW TO FLY. Send today for your copy of the easy-to-understand booklet "You, Too, Can Fly!" If you also want the full-color Piper catalog, enclose 10c in stamps or coin for postage-handling. Piper Aircraft Corporation, Department A122, Lock Haven, Penna., U. S. A.

PIPER POINTS THE WAY TO WINGS FOR ALL AMERICA

but STILL not fast enough!

Sometimes so little a thing as a chemical formula can cause a dragging operation to jump overnight into high gear. In spot welding, one of the newest of the industrial arts—oxides and other contaminations caused sputtering and popping—gassy pockets that resulted in faulty welds. Then came patented Kelite Process K-1 which makes possible thousands of identical continuous welds. Kelite Process K-1 renders aluminum alloys metallurgically clean. It is to modern welding operations what antiseptics are to surgery. It makes possible a faultless technique. It speeds the job. KELITE PRODUCTS, INC.

Send for treatises and case histories. Laboratory-trained, production-line-experience technicians are available for consultation.

KELITE

ADVANCED INDUSTRIAL CHEMICALS
FOR CLEANING AND PROCESSING

909 East 60th Street, Los Angeles, California

BRANCHES IN PRINCIPAL CITIES • MANUFACTURING PLANTS IN LOS ANGELES, NEW YORK, CHICAGO, HOUSTON

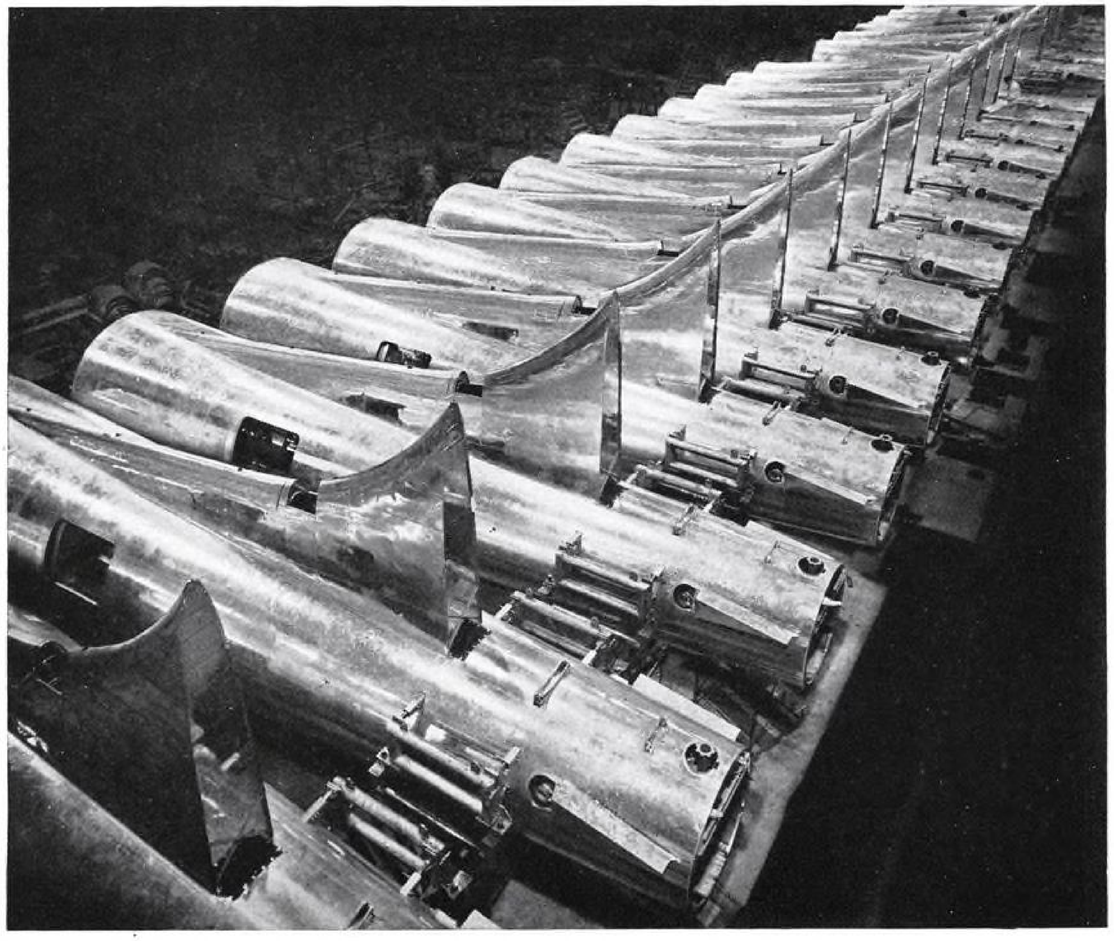

Dragon's Teeth

THERE is a legend that tells of dragon's teeth being transformed into an army of warriors, fully equipped for battle.

In this picture you see the legend being reborn. Here are gleaming dragon's teeth in the process of becoming a squadron of the most formidable weapons of the skies, Boeing Flying Fortresses.*

And the legend is being reborn with a vengeance, for since December 7, Boeing workers and production strategists have built the Fortresses with an ever-increasing tempo. Today the rate of production is more than three times greater than it was on the day of Pearl Harbor. (For this performance, Boeing was selected as the first aircraft manufacturer to receive the new Army-Navy award for production efficiency.)

The Boeing production system is the only one of its kind in the aircraft industry. Based on the principle of "production density," the Boeing system makes the most efficient use of men, machines, materials and floor space. So flexible is this production system that important design changes can be made quickly and without interrupting the production schedule. The concentration of all production facilities, so that the plant becomes one tightly integrated unit, makes possible a short, swift flow of parts through manufacture to assembly.

In building the B-17, for example, the airplane is divided into several major units. As these are manufactured and assembled, they converge into the final assembly station to become a Flying Fortress, complete with instruments and guns, ready to roar off to battle.

The increase of speed and efficiency in production . . . both for peace and for war . . . is only one of the many different projects that form a constant part of the Boeing manufacturing and engineering programs at Seattle and in the Middle West and Canada.

DESIGNERS OF THE FLYING FORTRESS • THE STRATOLINER • PAN AMERICAN CLIPPERS **BOEING**

*THE TERMS "FLYING FORTRESS" AND "STRATOLINER" ARE REGISTERED BOEING TRADE-MARKS

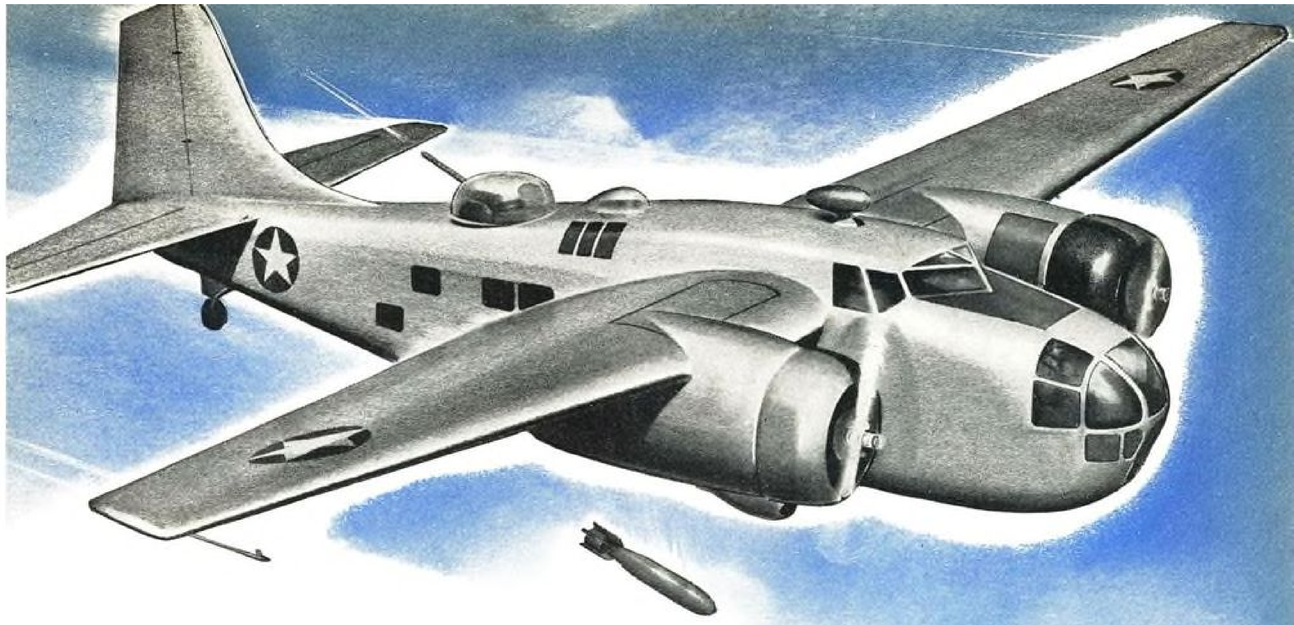

We're Proud

TO BE BUILDING THE BOEING AT-15

Soon the *Boeing AT-15* will be rolling off *McDonnell* assembly lines in ever increasing numbers . . . making its important contribution to the success of future bombing missions. For the AT-15 is a *crew-trainer*—the first airplane specifically designed for the integrated training of bomber crews.

Complete with all essential equipment, this small twin-engined bomber gives flight crews the training in *coordination* and *teamwork* necessary before they take over tactical duties in multi-engined bombardment planes.

Equipped with constant speed propellers, radio compass, automatic pilot, full flight and radio equipment, flexible machine gun, power turret, and moderate capacity bomb bays, the AT-15 performs all the functions essential to actual combat flying.

Designed and engineered by Boeing to conserve critical materials, the AT-15 is constructed of steel tubing with wood and fabric covered fuselage. Wings and stabilizers are plywood covered.

Yes, we *are* proud to be part of a team designated to build this plane. For thus can teamwork in production contribute to teamwork in the air. Both are essential to victory.

McDONNELL AIRCRAFT CORPORATION

SAINT LOUIS

FEDERAL

Aircraft

BEARINGS

TRADE MARK

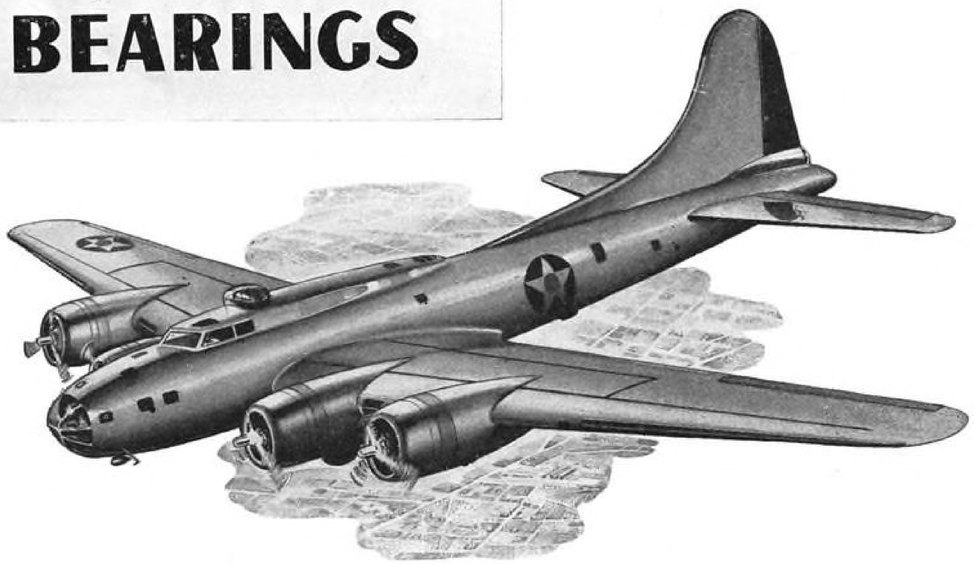

FEDERAL SPECIALIZES IN THE PRODUCTION OF QUALITY BALL BEARINGS • ITS POLICY IS TO MAKE THE FINEST BALL BEARINGS REGARDLESS OF ANY OTHER CONSIDERATION • THE FEDERAL ORGANIZATION IS DEDICATED TO THIS ONE PURPOSE—THIS ONE IDEAL •

THE FEDERAL BEARINGS CO., INC.

Makers of Fine Ball Bearings

U. S. A.

REPRESENTATIVES LOCATED AT

Detroit: 2640 Book Tower • Cleveland: 402 Swetland Building
Chicago: 902 S. Wabash Ave. • Los Angeles: 5410 Wilshire Blvd.

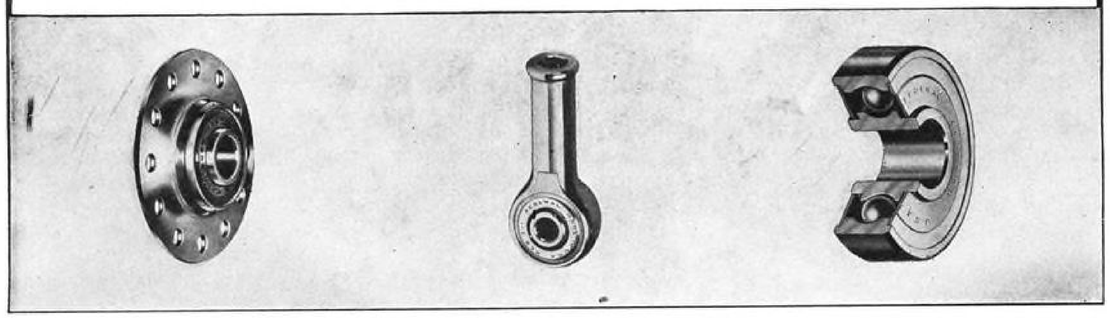

"This Aeroprop does everything but talk!"

"IT'S LIGHT—Not an ounce of useless weight about it. That means the Aeroprop delivers maximum horsepower and fight-power per pound."

"IT'S STRONG—And you can bet that strength pays off in safety and longer fighting service."

"IT'S SIMPLIFIED—Unit-construction puts automatic pitch control, plus the power for pitch changes, right in the compact propeller assembly itself."

Many a pilot on many a front could tell a better story of the Aeroprop than we can.

They've pulled the trigger on the deadly gun that pokes its barrel through the Aeroprop's hollow hub.

They're flying every day, and sometimes every night, so they praise the strength and durability of this steel propeller.

Too, they've been in spots where the pounds saved by the Aeroprop's simplified, unit-construction have meant the inches-to-spare or the instants-to-spare that count so much in high-speed fighting.

They know what it means to fly behind a propeller that is always "on speed," a propeller that responds almost instantly to every flight maneuver—climbing, cruising, diving, *fighting!*

They also know that quality goes into an Aeroprop. The best materials. The best American craftsmanship. Performance that is based on the latest achievements of propeller engineering, research and design. The day and night team-work of propeller engineers, production workers, and technicians of the United States Government, all working to produce more and more Aeroprops for America's mounting might in the air.

"Everything but talk!" The Aeroprop will never need to talk where ACTION speaks louder than words—where there are pilots who have flown with it, fought with it, and conquered with it.

AERO-PROP

AEROPRODUCTS DIVISION **GENERAL MOTORS** CORPORATION

GM ARMS FOR VICTORY

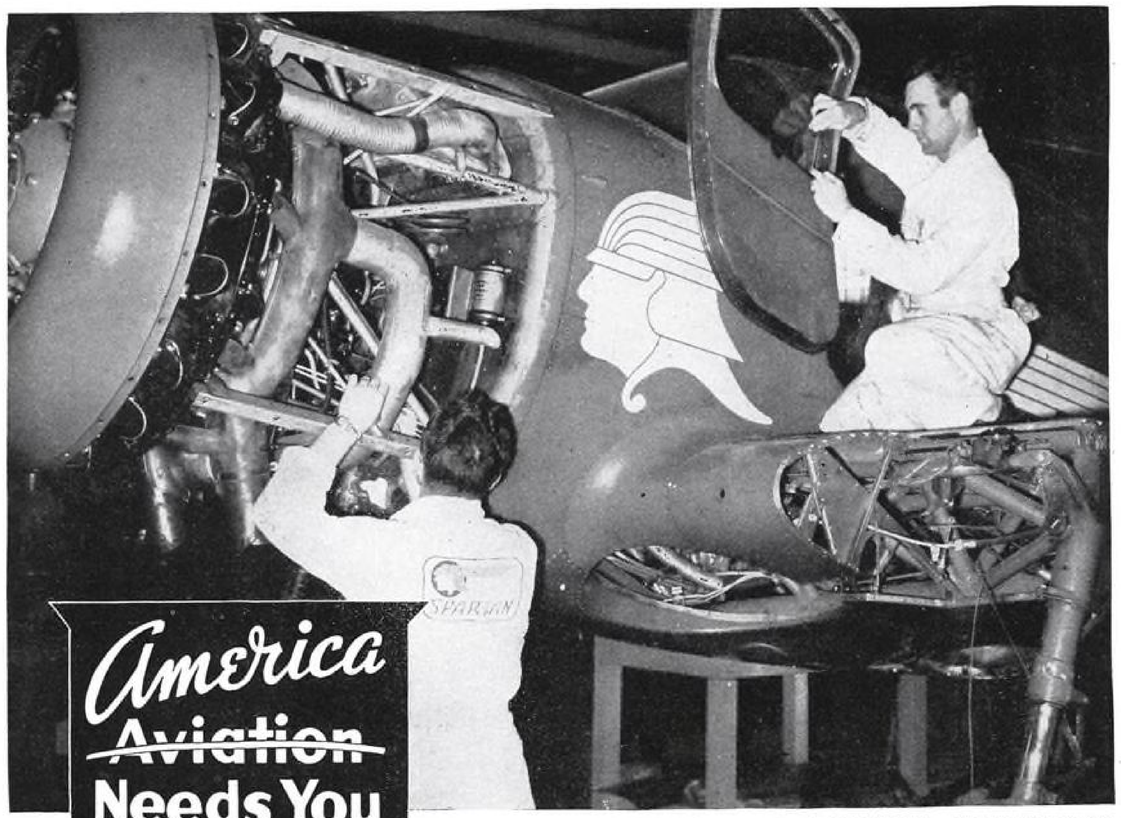

America ~~Aviation~~ Needs You

as an AIRCRAFT and ENGINE MECHANIC

★ Yes, aviation needs you, young man . . . and that means America needs you . . . as a skilled Aircraft and Engine Mechanic! Aircraft factories, airlines and big repair stations are in urgent need of thoroughly trained technicians to supervise the thousands of single operation workers. As production lines expand in currently operating plants and many new plants get production under way, the need for such trained workers grows greater. And SPARTAN is ready to train you to be one of the best.

This is your opportunity to place yourself in an important position, serving your country as a valuable worker in private industry; and if you are called for military service you can qualify for grades and ratings according to your ability. This is also your opportunity to be ready for a prominent place in the great post-war commercial aviation industry.

SPARTAN offers you the most complete, practical and thorough Aircraft and Engine Mechanic training available. You get skilled personalized instruction plus outstanding shop practice. SPARTAN's 100% Approved Repair Station has facilities for servicing the great fleets of training planes used in civil and military flight operations. Every type of shop and laboratory, completely equipped, is available. When you graduate from SPARTAN as an approved Aircraft and Engine Mechanic you're ready for an important position.

You can't afford to wait longer. Your America, and your future lifetime career make it urgent that you act at once. MAIL THE COUPON now. Next semester starts January 4th.

SPARTAN SCHOOL OF AERONAUTICS
DIVISION OF SPARTAN AIRCRAFT COMPANY

Spartan School of Aeronautics—Captain Maxwell W. Balfour, Director
Address Dept. A122, Tulsa, Oklahoma

Send me your new Catalog describing in detail the SPARTAN courses I have checked, also stating tuition and living expenses

Name ..... Age .....
Address .....
City ..... State .....
Previous Education .....

Check Courses You Prefer

- ☐ Commercial Pilot
- ☐ Airline Pilot
- ☐ Commercial Flight Instructor
- ☐ Aeronautical Engineering
- ☐ Airline Maintenance Engineering
- ☐ Aircraft or Engine Mechanic
- ☐ Aircraft Sheet Metal
- ☐ Aircraft Assembly Mechanic
- ☐ Airline Service (A&E) Mechanic
- ☐ Airline Communications
- ☐ Private Pilot Course
- ☐ Weather Forecasting
- ☐ Instrument Technician
- ☐ Women's Instrument Technician

Now available

"Plexiglas"

a motion picture...with sound

WITHOUT injecting sales talk, the Rohm & Haas Company has produced a sound film on the maintenance and repair of PLEXIGLAS.

It's a factual, semi-technical film designed to facilitate the use of PLEXIGLAS in war production. It already has been shown in more than 150 Army Air Force bases as an aid to ground crew instruction.

The opportunity is offered to the aircraft industry and to educational institutions to borrow a print of this interesting 16 mm. sound film. Using your letterhead, write Rohm & Haas Company, Washington Square, Philadelphia, Pa., giving your first and second choice of dates and the approximate length of time you expect to use it.

PLEXIGLAS *is a trade-mark, Reg. U. S. Pat. Off., for an acrylic resin thermoplastic manufactured by the Rohm & Haas Company.*

ROHM & HAAS COMPANY

WASHINGTON SQUARE, PHILADELPHIA, PA.

Manufacturers of Leather and Textile Specialties and Finishes . . Enzymes . . Crystal-Clear Acrylic Plastics . . Synthetic Insecticides . . Fungicides . . and other Industrial Chemicals

JOHNNY SKYTROOPER, U.S.A.

LOOK OUT BELOW! Johnny Skytrooper is rough, tough and nasty. Striking behind enemy lines he hits hardest where it hurts the most. Douglas C-53 "Skytrooper" transports carry him swiftly on his mission of destruction; Douglas C-47 "Skytrains" and C-54 "Skymasters" follow through with his supplies. Setting the pace for war transport production, Douglas is proud to provide the equipment for Johnny Skytrooper to "win with wings." Douglas Aircraft Co. Inc., Santa Monica, Calif.



Left to right (1) C-54 "Skymaster" (2) C-47 "Skytrain," C-53 "Skytrooper" (3) A-20 "Boston," A-20 "Havoc" (4) SBD "Dauntless," TBD "Devastator," A-24 "Banshee"

DOUGLAS

MEMBER, AIRCRAFT WAR PRODUCTION COUNCIL, INC.

"Let's Contact MERIAM —THE MANOMETER PEOPLE— ABOUT THIS"

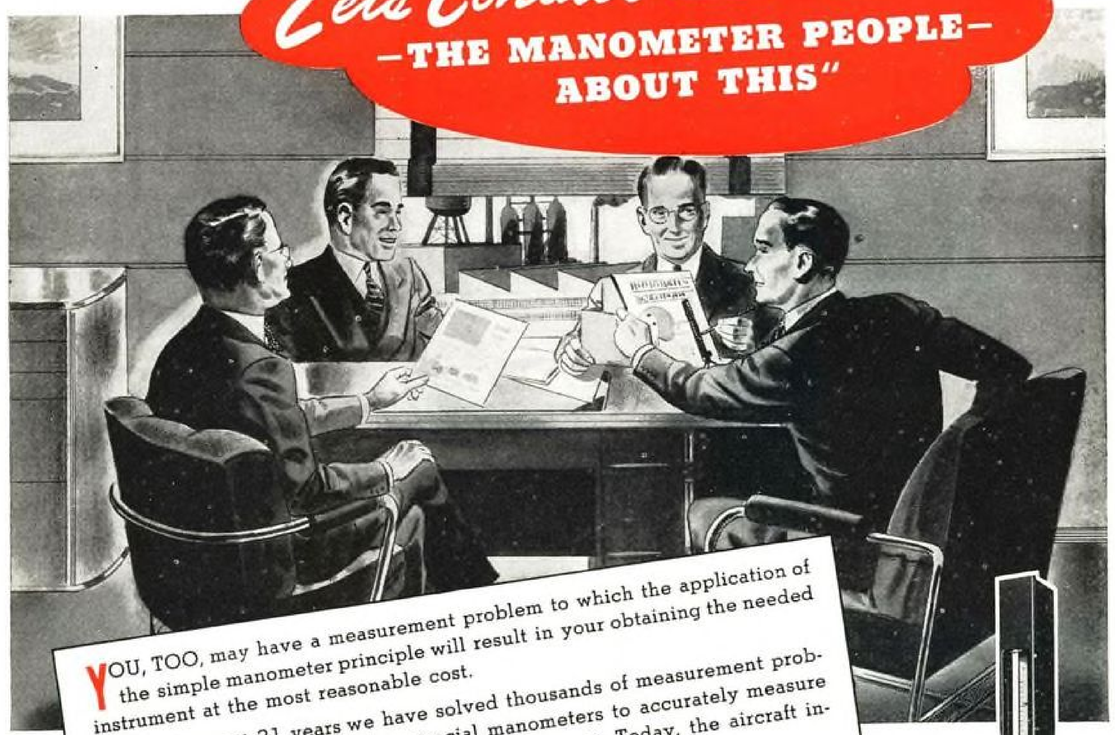

YOU, TOO, may have a measurement problem to which the application of the simple manometer principle will result in your obtaining the needed instrument at the most reasonable cost.

During the past 31 years we have solved thousands of measurement problems by supplying standard or special manometers to accurately measure pressures, vacuums and flows of liquids and gases. Today, the aircraft industry is one of the largest users of Meriam manometers.

We have specialized in this one field — manometers. The confidence people express in us is in such terms as "Meriam will do it," and "If Meriam can't, no one can." This is the logical result of providing throughout the years constantly improved equipment to meet all conditions in this particular field, giving the best possible service, and providing the instruments which do the job with the greatest economy.

The Meriam line of instruments is described in Catalog C-10. We shall be glad to send you a copy and discuss with you your measurement problem.

THE MERIAM COMPANY, 1953 West 112th Street, Cleveland, Ohio

"8 IN 1" MERIAM MANOMETER
for Aircraft Instrument Testing

This manometer, Model A-338, has an extensive application in laboratory and field servicing for checking calibration to determine functioning of aircraft instruments, in particular: Altimeters, Air Speed Indicators, Rate-of-Climb Indicators, Fuel Pressure Gauges, Manifold Pressure Gauges, Suction Gauges, Automatic Pilot sylphons and actuating diaphragms, etc. • The instrument is of the direct reading well type design incorporating an eight sided scale selector, permitting the selection of proper scale for particular aircraft instrument being checked. Scales are adjustable to suit barometric conditions in any specific locality and are direct reading in miles per hour-knots-pounds-inches-millimeters, etc. The range is from 0 to 61 inches of mercury or water. An integral return well prevents loss of indicating fluid. *The manometer is fully described in Bul. 22. Copy mailed on request.*

Meriam... THE MANOMETER PEOPLE

THE BIG GUN

of the Peace to Come

America, in war or peace, is progress . . . To more effectively the progress of the future, Formica, trating the energies of a considerable on the problem of improving laminated it to new uses—that there may be better insulated electrical devices, better control for airplanes, better instrument panels, better ignition for all internal combustion motors, more resistant parts for chemical industries . . . If you have problems which might be solved by such a plastic material, this staff will be glad to give you their time and effort in attempting a solution.

The biggest gun in the arsenal of technical proficiency and engineering serve the war effort, and prepare for now as for years past, is concen- engineering and research staff plastic material and adapting

FORMICA

Aviquipo 10th Year

THE FORMICA INSULATION CO. • 4661 SPRING GROVE AVENUE • CINCINNATI, OHIO

Bring your Spring Problems to us!

Here's expert help to speed up your war production

WAR is Hell—and no one knows it better than the design engineer called upon to furnish springs for modern fighting equipment.

Springs for such application must withstand stresses unheard of in peacetime. They must often fit niggardly limits of space and weight. They must function efficiently under incredible extremes of temperature, weather and atmosphere. And they must stand up in service on battlefields in every corner of the globe—on burning deserts, in steamy jungles, in the frozen spaces of the stratosphere, amid the salty spray of every sea.

These requirements impose problems the designer has seldom faced before. His job is made more difficult by the fact that shortages of critical alloying elements constantly tend to befuddle his choice of the proper steel for the purpose. That is why the help of our spring specialists can be so valuable right now.

These men, as recognized authorities in spring engineering, have collaborated in providing correct springs for every type of equipment America produces for war. Springs for tank and airplane cannon, for anti-aircraft guns, for projectiles, bombs, land mines, torpedoes, for precision instruments of all kinds. Their competent assistance is placed freely at your disposal. We welcome the opportunity to work with you.

AMERICAN STEEL & WIRE COMPANY

Cleveland, Chicago and New York

Columbia Steel Company, San Francisco, *Pacific Coast Distributors* · United States Steel Export Company, New York

FIRST IN WAR . . .
FIRST IN PEACE . . .
U·S·S American Quality Springs

USS

UNITED STATES STEEL

AN INDUSTRIAL *TRAGEDY* IN TWO ACTS

"Listen: I have right here before me all the bills for those work-benches we had built in 'C' Bay. They total up something that doesn't even *look* like your estimate—and it's 'way over the Hallowell people's price. I told you in the first place I thought we should get 'Hallowell' Work Benches—now I *know* it. Why—their deliveries would have beaten our time by days. Now, here is how the matter stands: We put up with the pounding and clutter and bother, wait longer and pay more—and get something that isn't nearly as good. Confound it, man, 'Hallowell' Benches would have been an asset—we could re-arrange them or move them around the plant. We made a thundering mistake in not getting the 'Hallowell'—in a dozen ways outside of price."

See to it that you don't make the same blunder. If you are contemplating a conversion or addition, get in touch with us before you decide. Don't jump to conclusions as to how much "Hallowell" Equipment will cost or how long you will have to wait until you get our proposition.

HALLOWELL

SHOP EQUIPMENT

Fig. 928 "Hallowell" Work-Bench with laminated wood top. Drawer is extra. Pat and Pat's. Pending.

STANDARD PRESSED STEEL CO.

JENKINTOWN, PENNA., BOX 566

BOSTON · DETROIT · INDIANAPOLIS · CHICAGO · ST. LOUIS · SAN FRANCISCO

. . for that extra *Drive"*

A *flying start . . . and a flying finish!*

Out of a great North Sea sky battle where four Flying Fortresses gave odds of 5 to 1 to a swarm of Focke-Wulf 190s and Messerschmidt 109s, came three new dramatic figures: two men . . . *and a plane.*

Enemy fire riddled two of the "Johnny Reb's" motors. The other two kept it flying. A seriously wounded pilot and a bombardier who "washed out" of flying school brought it in and sat it down, writing a new chapter in the serial story of the heroism of American men, and the performance-margin of American machines.

In this highly mechanized war, the ability of an engine to deliver above and beyond line of duty, often decides whether a fighting man will die for his country . . . *or live for it.* Meeting this responsibility requires the last final ounce of effort, of "drive," from every vital part, and especially from piston rings. In many of the nation's fighting planes, as in the Flying Fortresses, American Hammered Piston Rings are regularly used.

Producing rings like this takes more than a building and some machines. It takes the brains and brilliance of research men who continuously seek the ultimate how and why. It takes the skill of foundrymen who *create* modern casting practice, rather than follow it. It takes the manufacturing genius that designs the specialized machines not found in any catalog, to produce more rings, better and faster. It takes critical, painstaking inspection by trained inspectors. It takes the engineering "know-how" that has come from 25 years of successfully solving ring problems of all kinds.

Where equipment must have that extra "drive," you'll generally find American Hammered Piston Rings on the job. —Koppers Company, American Hammered Piston Ring Division, Baltimore, Maryland.

American Hammered Piston Rings

a KOPPERS product

More Arcs FROM EVERY WELDING MACHINE...

with the new Wilson "Honey Bee" Arc Control Station

GREATER welding output from every machine; improved arc control, and better welds on thin gauge metal — these are some of the advantages offered by the new Wilson "Honey Bee". Several welding operations can be performed simultaneously from one constant potential arc welding generator — up to the full capacity of the generator. *For example,* two 150 ampere or four 75 ampere Wilson "Honey Bees" can be connected to any 300 ampere constant potential arc welding generator. Most conventional drooping voltage generators can be converted easily to constant potential. A quick-change switch may be mounted on every Wilson "Hornet" arc welding generator for quickly changing its characteristics from drooping to constant potential or vice versa.

Wilson "Honey Bee" stations are connected to

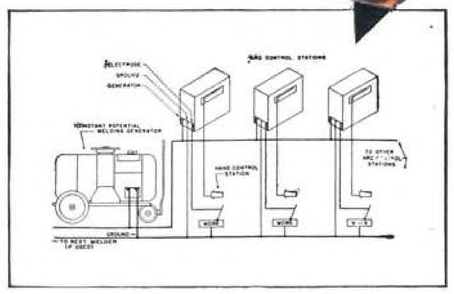

the generator in parallel. The number of stations used (within the capacity of the generator) determines the number of welding operations that can be performed at the same time. Each operator can control his own welding current from maximum to minimum without breaking the arc or affecting the performance of any other station working from the same generator.

Improved Weld Deposits with Remote Crater Control

To prevent weld defects that result from the abruptly broken arc, the Wilson "Honey Bee" is equipped with a control switch which permits gradual reduction of the current. For example, when welding, the operator can reduce the current from the value at which it was set by pressing a button on the control switch which he holds in his hand. He can hold this button down until the current has been reduced from, (for instance), 65 to 25 amperes. He can maintain it at 25 amperes until the arc is extinguished, or he can control the crater by allowing the current to fall to zero. In either case when he releases the control button, the setting automatically goes back to the original figure. The photomicrographs at right show clearly how Wilson Crater Control improves the quality of weld deposits.

Metal deposited with standard welding machine and no crater control.

Metal deposited with Wilson "Hornet" equipped with Remote Arc and Crater Control Station.

Control Mechanism

Controls are fully automatic and are operated by the remote control push button. For convenience this control may be combined with the electrode holder to save time for the operator. The mechanism in the unit is motor-operated, driving a saddle type sliding contactor, which adjusts a resister having a range of either 0 to 75 amp. or 0 to 150 amp., depending on the size of "Honey Bee" used. This motor is operated by two directional contactors, bridged by condensers to eliminate sparking or sticking of contactors.

Ratings and Dimensions

Wilson "Honey Bee" Arc Control Stations are made in two sizes: 0 to 75 amperes and 0 to 150 amperes.

Continuous current rating at any setting on an open circuit of 80 volts, constant potential.

	Height	Length	Width	Weight
75 amperes	20"	24¼"	11¼"	125 lbs.
150 amperes	20"	29¼"	13¼"	160 lbs.

For further information, call your nearest Air Reduction office

WILSON WELDER AND METALS CO., INC.

General Offices: 60 East 42nd Street, New York, N. Y.

WASHED COAT ELECTRODE AVAILABLE ON LOW PRIORITIES

Wilson No. 18 Washed Coat electrode is an all-purpose electrode for general welding on low carbon and mild steel. It is made in 5 sizes — 3/32", 1/8", 5/32", 3/16" and 1/4", with a tensile strength of 45,000 to 60,000 p.s.i. as welded, and elongation in 2" of 7% to 10%. The surface coating materially improves arc stability and operating characteristics over those of bare electrodes.

WILSON

WE FINISHED OUR FIRST MILLION HEAT EXCHANGERS TWO YEARS AGO!

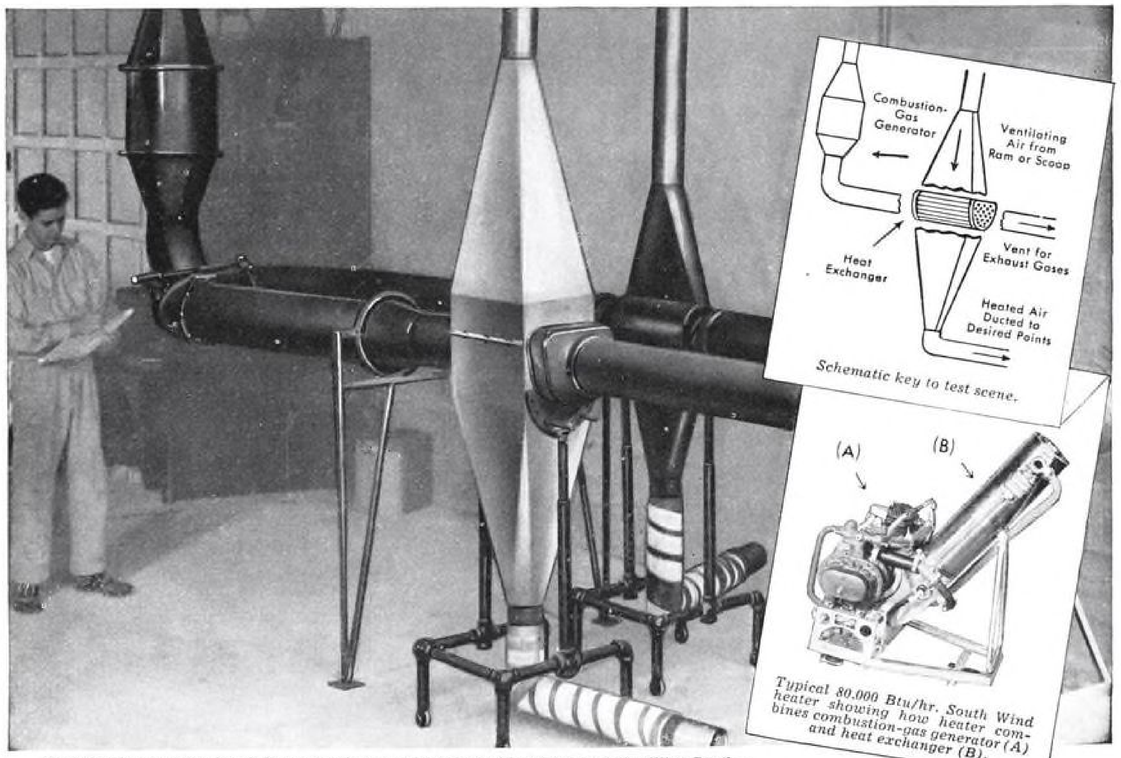

Day after day, over long periods, combustion-gas generators with outputs up to 6 million Btu/hr. try to "burn up" heat exchangers on test. Meantime all essential data is reported hourly.

7 Years of Practical Experience with Combustion-Gas Heating Now Embodied in Specially Engineered Aircraft Equipment

AN ESSENTIAL part of the famous South Wind car heaters of peace-time was a highly developed heat exchanger—no bigger than your fist, and perfected for a specific job. And since long before that heater was first marketed in 1935, Stewart-Warner engineers have devoted their skill—and their unmatched engineering facilities—to problems of heat exchange.

Thus when the needs of aviation brought their demand for new and specially engineered heating equipment, Stewart-Warner experts could offer aviation engineers a rich background of specialized experience. To existing facilities already the most complete available, they added a specially built altitude chamber—combustion-gas generators far exceeding existing engines in Btu/hr. output—and other advanced equipment for simulating flight conditions.

The result is a really complete line of aircraft heating equipment—four different types of heat exchangers, plus a wide range of South Wind heating equipment in which the heat exchangers are provided with their own combustion-gas generators. All embody knowledge of aircraft requirements and practice gained in years of cooperation with aircraft engineers—all have performance known in advance—all have benefitted by actual field observation by Stewart-Warner engineers on the battlefronts.

Charts of all essential performance data on each of four heat-exchanger types are now available.

Another Product of STEWART WARNER

South Wind HERMETIC COMBUSTION **Heaters**

REG. U. S. PAT. OFF

HEATER DIVISION, STEWART-WARNER CORP., CHICAGO

West Coast Office: Stewart-Warner Aircraft Heater Engineering and Service, 1273 Westwood Blvd., West Los Angeles, California

KNOW THESE FASTENINGS

They Save Vital Man-hours · assure stronger, tighter assemblies!

Shakeproof LOCK WASHERS

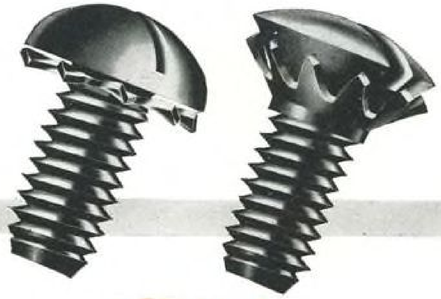

SEMS FASTENER UNITS

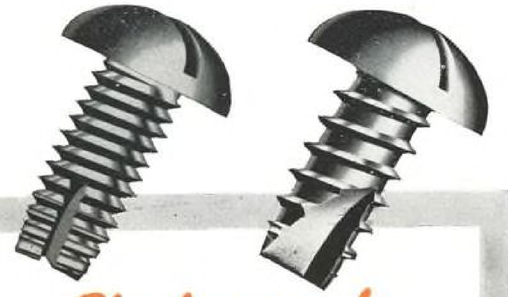

Shakeproof THREAD-CUTTING SCREWS

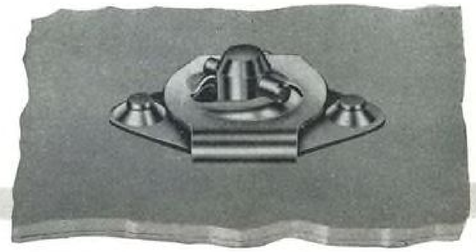

Shakeproof COWL FASTENERS

The lock that vibration cannot loosen!

Each tapered-twisted tooth of a Shakeproof Lock Washer bites into both surfaces and acts as a ratchet or strut between the nut or screw and the work surface. As vibration tries to loosen the fastening, it only forces the teeth to bite deeper—thus setting up a powerful locking force which resists any "backing" of the nut or screw. Because of this biting action, these lock washers are highly efficient for electrical and bonding applications.

Pre-assembled for easier handling and faster driving!

Only one unit to handle—no time wasted putting lock washers on screws—no chance to "forget" placing a lock washer under every screw—inventories always balance and one order covers both parts. These are just a few of the many advantages SEMS Fastener Units offer. They are certain to speed assembly operations—they reduce costs and assure improved product performance!

No tapping—each screw actually cuts its own thread!

In metals and plastics, these Shakeproof Thread-Cutting Screws produce stronger, tighter fastenings and save vital assembly time. Because each screw remains in the perfect mating thread it has cut for itself, a snug, tight fit is always certain. The time-consuming operation of tapping is eliminated and there's no worry about getting or maintaining taps!

Easy assembly—quic operation—no stres hazards!

The unique design of the Shakeproof Cowl Faste er gives it many outstanding advantages whi appeal to aircraft designers. Its positive lockin action—its reinforcing base which eliminates stre hazards and also limits deflection—and its aut matic compensation for variation in sheet thic ness are indicative of its high performance abilit The design permits installation with a minimu of special tooling!



Send for free Testing Kits and complete technical data book!

Handy test kits of any of the Shakeproof Products shown above are available on request. Also, if you have not received a copy of the complete Shakeproof Catalog No. 42 be sure to advise us. Try these Shakeproof Fastenings on your products—write for sample testing kits, today!

Bring Your Fastening Problems to "Fastening Headquarters"

SHAKEPROOF Inc

2501 North Keeler Avenue, Chicago, Illinois

Distributor of Shakeproof Products Manufactured by ILLINOIS TOOL WORK
Plants at Chicago and Elgin, Illinois . . . In Canada: Canada Illinois Tools, Ltd., Toronto, Ontari

SEMS FASTENER UNITS • THREAD-CUTTING SCREWS • LOCK WASHERS • COWL FASTENERS • LOCKIN
AND PLAIN TERMINALS • LOCKING SCREWS • RADIO AND INSTRUMENT GEARS • SPECIAL STAMPIN

PRODUCTION FOR *Victory*

TRADE AUTOMATIC MARK

STANDARD *Victory* MODELS

APPROVED TYPES TO CONSERVE VITAL MATERIALS AND SPEED UP WAR PRODUCTION MATERIALS HANDLING

FOR VICTORY BUY UNITED STATES WAR BONDS AND STAMPS

Model "TLN-2" 4000 Pound Capacity High Lift Tiering Platform Truck for Skid Transportation and Stacking. Standard Platform is 55" Long, 26" Wide, 10¼" High with 60" to 72" Lift.

"AUTOMATIC" is wholeheartedly cooperating with the War Production Board by building only approved types of Industrial Power Trucks to conserve vital materials and to speed up material handling in the War Production effort.

Under General Limitation Order L-112 and supplemental order L-112-A issued by WPB, "AUTOMATIC" standard approved models are illustrated and described here.

Let the "AUTOMATIC" representative supply you with full details and show you how the standard approved models can be efficiently applied to your present material handling problems and still be highly efficient for post war production work.

"AUTOMATIC" representatives are listed in the classified telephone directories in the principal cities and industrial areas under "TRUCKS INDUSTRIAL."

Model "LN-2" 4000 Pound Capacity Low Lift Elevating Platform Truck for Skid Transportation. Standard Platform Is 55" Long, 26" Wide, 10¼" High with 6" Lift.

TRANSPORTER LIFT TRUCKS

Model "P-427" Pallet Type 4000 Pound Capacity "TRANSPORTER" Fork Type Lift Truck. Standard Established Fork Lengths Are Minimum 30" to 60" Maximum in 2" Steps. Standard Fork Height in Low Position is 3⅜". Lifting Height from Low to High Position Is 3¾" (Get P-427 Bulletin for Full Details).



Model "TN-4 and TW-4" 4000 Pound Capacity and Model "TN-6 and TW-6" 6000 Pound Capacity "TRANSPORTER" Platform Type Lift Trucks for Skid Platforms — Standard Platform Lengths 36" to 72" in 12" Steps. Widths 20" and 26½"; Heights in Low Position 6"; 7"; 9"; 11"; (For Full Details Get "TRANSPORTER" Platform Bulletin).

Model "LO-5" 10,000 Pound Capacity Low Lift Elevating Platform Truck for Skid Transportation. Standard Platform is 60" Long, 26" Wide, 11" High with 5" Lift.

Model "LN-3" 6000 Pound Capacity Low Lift Elevating Platform Truck for Skid Transportation. Standard Platform Is 55" Long, 27" Wide, 10¾" High with 6" Lift.



Model "LN-3" → Standard 6000 Pound Capacity Low Lift Truck Equipped with Manual Operated Boom and Motorized Crane attachment. Capacity 2000 Pounds at 42" Outreach.

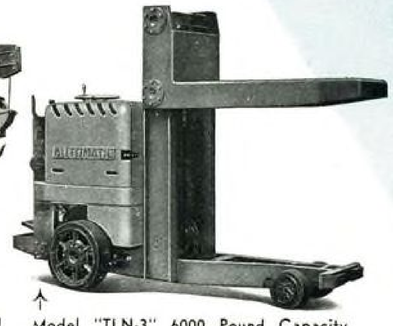

Model "TLN-3" 6000 Pound Capacity High Lift Tiering Platform Truck for Skid Transportation and Stacking. Standard Platform is 55" Long, 27" Wide, 10¾" High with 60" to 72" Lift.

Model "CHTF-2" Center Control-Light Duty 2000 Pound Capacity Telescopic Tilting Tiering Fork Lift Truck for Unit Loads on Pallets or Skid Platform. Standard Forks Up to 36" Long. Telescopic Lift Up to 119".

Model "THTF-L-4" Center Control 4000 Pound Capacity Telescopic Tilting Tiering Fork Lift Truck for Unit Loads on Pallets or Skid Platforms Standard Forks Up to 36" Long. Telescopic Lift Up to 119".

Model "TLO-5" 10,000 Pound Capacity High Lift Tiering Platform Truck for Skid Transportation and Stacking. Standard Platform is 60" Long, 26¼" Wide, 11" High with 60" to 72" Lift.

Model "TETF-7" Rear Control 7000 Pound Capacity Telescopic Tilting Tiering Fork Lift Truck for Unit Loads on Pallets or Skid Platforms. Standard Forks Up to 36" Long. Telescopic Lift Up to 119".

NOTE:—Some "AUTOMATIC" approved models can be furnished with specifications meeting "Industrial Truck Association Spark-Enclosed Equipment" for operation in heavily laden dust or vapor atmosphere such as in arsenals, ammunition depots and ordnance or chemical warfare plants. These are models "LN-2"; "TLN-2"; "THTF-L-4"; "THTF-L-6" and "TRANSPORTER" platform and pallet type lift trucks.

Model "THTF-L-6" Center Control 6000 Pound Capacity Telescopic Tilting Tiering Fork Lift Truck for Unit Loads on Pallets or Skid Platforms Standard Forks up to 36" Long. Telescopic Lift up to 119".

Model "THTF-M-10" Heavy Duty Center Control 10,000 Pound Capacity Telescopic and Non-Telescopic Tilting Tiering Fork Lift Truck for Unit Loads on Pallets or Skid Platforms. Standard Forks Up to 36" Long. Telescopic Lift Up to 98"

MANUFACTURERS FOR OVER 35 YEARS

***"Electric Propelled"* INDUSTRIAL LIFT TRUCKS**

AUTOMATIC TRANSPORTATION CO.

DIV. OF THE YALE & TOWNE MFG. CO.

63 WEST 87th STREET CHICAGO, ILLINOIS

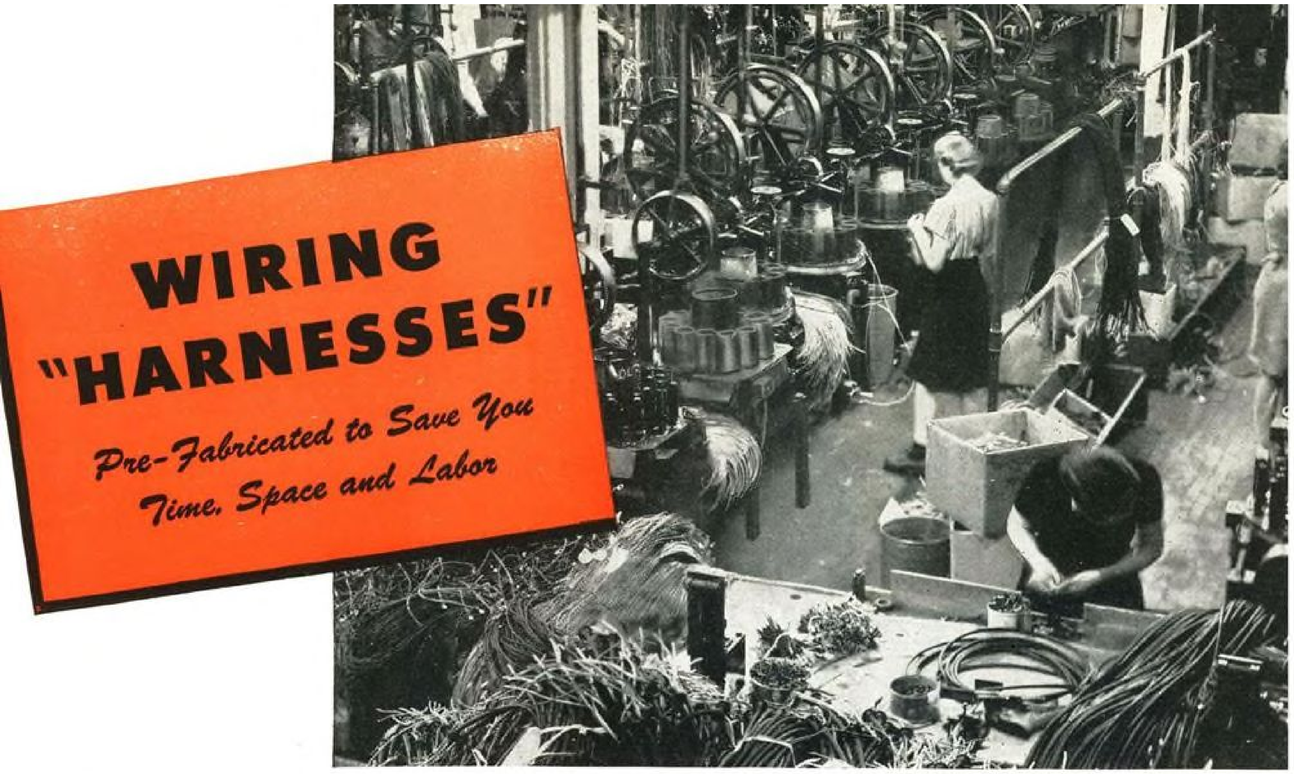

SAVINGS in time, labor and manufacturing space in the assembly of aircraft and their electrical components, can often be effected by the use of pre-fabricated wiring harnesses.

Here in the Wire Division of Electric Auto-Lite are specialized equipment, and personnel skilled in the design and fabrication of wiring harnesses.

And here, under the same roof, we are producing Auto-Lite Sterling "B" Braid Synthetic, approved for all low-tension aircraft circuits from 22 Ga. to 00 Ga. It is light in weight, small in diameter, tough and resistant to abrasion—gives an exceptionally desirable combination of characteristics as compared with other types of construction.

Result is that here you can obtain your low-tension aircraft wire—have it pre-fabricated into complete "harnesses"—and delivered ready for installation.

Write for complete information on our engineering and production facilities.

THE ELECTRIC AUTO-LITE COMPANY • WIRE DIVISION
PORT HURON, MICHIGAN

In its 26 great manufacturing divisions; Auto-Lite is producing for America's Armed Forces on Land, Sea and in the Air

AUTO-LITE
Sterling
AVIATION *ELECTRICAL*
WIRES AND CABLES

TRAINING . . . IS THE ONLY ROAD TO LASTING SUCCESS

IN CIVILIAN or MILITARY AVIATION

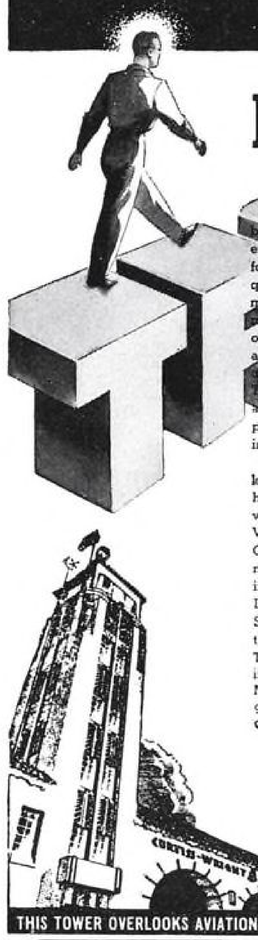

Production and maintenance of the tremendous number of planes demanded by President Roosevelt means employment by industry and enlistment by the armed forces of thousands of men who can meet minimum requirements by short "quickie" courses. BUT, only the men with MAXIMUM training can hope to win advancement to responsible and well paid positions either in civil or military aviation. No matter how great the future of aviation after the war, it can not retain all the vast number of workers made necessary by war production schedules. The ONLY way you can assure yourself of a career in aviation is to train NOW to occupy a vital supervisory position and establish yourself as a valuable asset to the industry.

The executives who have made aviation THEIR career know the value of each man is governed by two factors: his intelligent sincerity in selecting aviation as his life work, and THE ABILITY AND EXPERIENCE OF THOSE WHO TRAIN HIM FOR THAT CAREER. They know that Curtiss-Wright Technical Institute graduates are—and for many years have been—thoroughly qualified to fill the industry's exacting requirements.

Located in the very center and a very important part of Southern California's great aircraft industry, with its more than two billion dollars in unfilled orders, Curtiss-Wright Tec has come to be recognized as the nation's leading institution for the training of Aeronautical Engineers and Master Mechanics. Mr. Donald Douglas, President of the great Douglas Aircraft Company, chose this school for his own son's training, which pointedly indicates the high standing Curtiss-Wright Tec has attained in the aircraft industry since its establishment in 1929.

It is imperative that before you invest in a course of career training you determine what the returns will be on your investment . . . for your choice of a school in which to take your training will determine how much money you will make all the rest of your life.

Curtiss-Wright Tec's career training is carefully designed to do just one thing:—TO MAKE MONEY FOR YOU, so upon graduation you can be independent and self-supporting for life. Our thousands of successful graduates have proven that Curtiss-Wright Tec training gets results and always pays, since it trained them in advance for the highest position they could ever expect to occupy. It can do the same for you.

This school has never guaranteed positions for its graduates, but practically every graduate has obtained immediate employment and is advancing rapidly. The demand for our graduates far exceeds the supply, and we honestly believe that every student who enrolls here will be able to obtain, with our assistance, immediate employment upon graduation.

WARNING!—"Don't miss the boat." The greatest opportunity in your lifetime exists today! There never was such an opportunity in aviation for you: There may never be another. A position awaits you. Insure for yourself a steady income and independence for life. DON'T FOLLOW—LEAD! Send in your enrollment before you "miss the boat."

Offering specialized and proven training in AERONAUTICAL ENGINEERING & MASTER MECHANICS

No Flying Involved

JOIN THE U. S. AIR FORCES

THIS TOWER OVERLOOKS AVIATION'S MOST DISTINGUISHED SCHOOL OF AERONAUTICS

CURTISS WRIGHT
TECHNICAL INSTITUTE

GRAND CENTRAL AIR TERMINAL 1226 AIRWAY GLENDALE (LOS ANGELES) CALIF.
UNDER PERSONAL SUPERVISION OF MAJOR C. C. MOSELEY, OWNER, SINCE ITS ESTABLISHMENT IN 1929

Contractor to the U. S. Army Air Corps

BE WISE—PROTECT YOUR FUTURE
MAIL TODAY • DON'T DELAY

- ☐ AERONAUTICAL ENGINEERING COURSE
- ☐ MASTER AVIATION MECHANIC COURSE
- ☐ SPECIALIZED ENGINE COURSE
- ☐ SPECIALIZED AIRPLANE COURSE
- ☐ SPECIALIZED AIRCRAFT WELDING COURSE
- ☐ POST GRADUATE AERONAUTICAL ENGINEERING COURSE
- ☐ SPECIALIZED AIRCRAFT SHEET METAL COURSE
- ☐ AERONAUTICAL DRAFTING COURSE, HOME STUDY
- ☐ AIRCRAFT BLUE PRINT READING COURSE, HOME STUDY

NAME
ADDRESS
CITY STATE AV-12

FOR VICTORY
BUY UNITED STATES WAR BONDS AND STAMPS

U. S. MARINE CORPS PHOTO

...where they'll do the most good

Latest Jefferson-Travis two-way radio communication equipments are limited to the Armies and the Navies of the United Nations. Only the men in combat units or in the most vital services have them. *They are where they'll do the most good.*

JEFFERSON-TRAVIS RADIO MFG. CORP.

Manufacturers of Aircraft, Marine and Mobile Radio Communication Equipment

NEW YORK, N. Y. WASHINGTON, D. C.

Service Simplicity

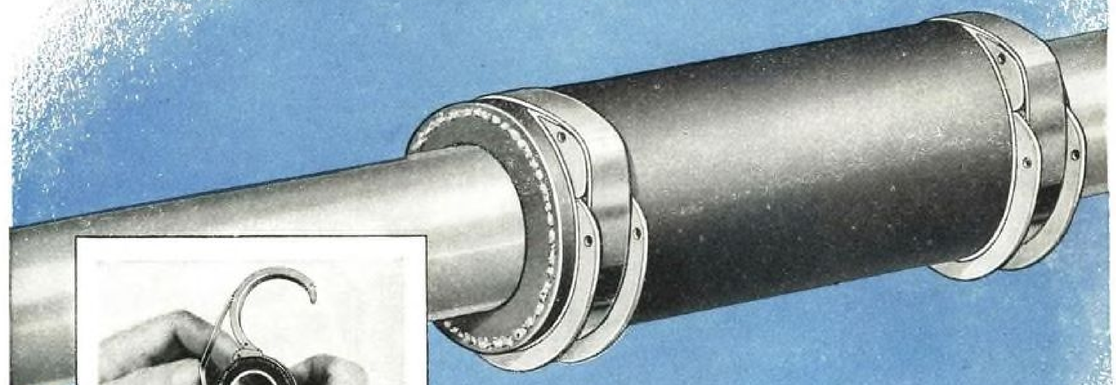

ADEL
STA-LOC HOSE CLAMP

1. Quick and Easy to use. Just place open clamp around the hose.

2. Then swing the locking latch to closing position. No tools are needed!

3. Result—a hose clamp which exerts even pressure all around!

"No nuts, no threads— Uniform pressure ALL around."

At last, a *service-designed* hose clamp which can be re-used any number of times without fracture or loss of time! *Design Simplicity* has done away with nuts, threads and pivots. Fewer parts permit substantial reduction in stores. No special tools or wrenches are required, no special skill. A simple adjustment . . . and they snap securely into place with a tight grip that is *uniform all around*. No bulges, bends or concentrated stresses due to focal locking pressure. Made of stainless steel for speedy assembly, long service life, and continued re-use. War industry executives may obtain complete information by contacting the Huntington Division or nearest engineering service office.

HUNTINGTON
PRECISION PRODUCTS
Division of ADEL PRECISION PRODUCTS CORP.

ENGINEERING SERVICE OFFICES—1444 Washington Ave., Huntington, W. Va.; Administration Bldg., Love Field, Dallas, Tex.; 609 Stephenson Bldg., Detroit, Michigan; 303 Wareham Bldg., Hagerstown, Maryland; 302 Bay Street, Toronto, Ontario, Canada

...saves time—saves materials—saves files

This is a war in which conservation is as important as *production*. It applies to tools as well as to materials and products. And few tools serve more widely than files.

Aircraft as well as other industrial concerns are having to get along with more and more inexperienced workers. Waste from improper file use, care and selection is becoming a growing problem.

Superintendents and foremen *can* do something about it. Posting or circulating the rules of proper file use and care suggested at the right will help to improve the worker's efficiency, save his time, increase his output, conserve materials, reduce spoiled work, make files themselves last longer (conserving file steels, too).

Nicholson has literature useful as "shop-school texts." Write us on any problem or efficiency program in which our experience with files and filing might be helpful. For your file needs, consult your mill-supply house.

* ***Free Technical Bulletins*** on Nicholson or Black Diamond Special Purpose Files for: Stainless Steel, Aluminum, Brass, Lathe Filing (these four illustrated above), Die and Foundry Castings, Plastics, Die Making, Shear Tooth Filing.

NICHOLSON FILE CO., PROVIDENCE, R. I., U. S. A.
(Also Canadian Plant, Port Hope, Ontario)

"DO" and "DON'T"

- Use *The right file for the job.**
- Don't "tear" into the work with too much pressure on the forward stroke.
- Don't "drag" the file back under needless pressure.
- Don't throw files among other tools or objects.
- Don't stack files against, or lay them on top of, one another.
- Keep files dry so rust will not corrode their cutting edges.
- Keep files clean of filings. After every few strokes, tap file on bench or wooden object to loosen chips. Brush file frequently with file brush or card; and always before putting the file away.

NICHOLSON FILES
FOR EVERY PURPOSE

NICHOLSON U.S.A. MADE IN U. S. A.

Design for Victory

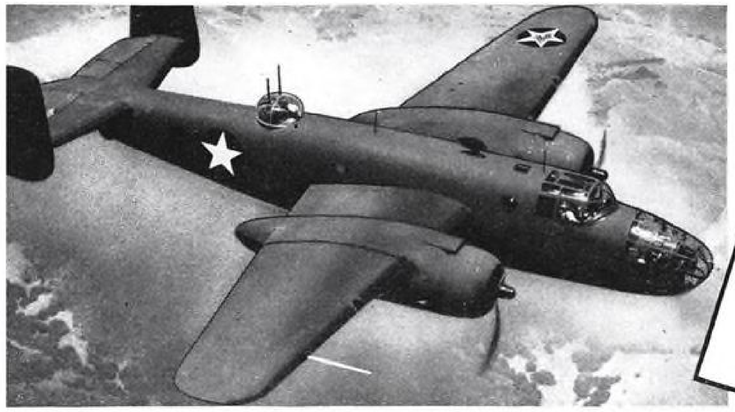

From Southern California come North American B-25 bombers. This is the type of bomber which first blasted Tokio.

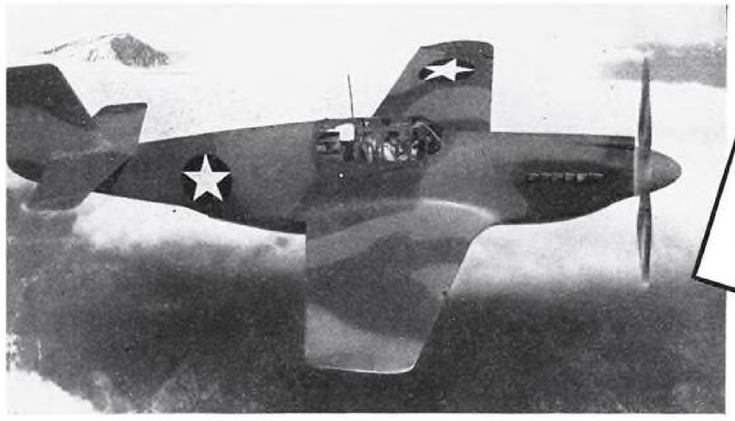

From Southern California come North American Mustang fighters . . . dread scourge of the Axis Nations the whole world over.

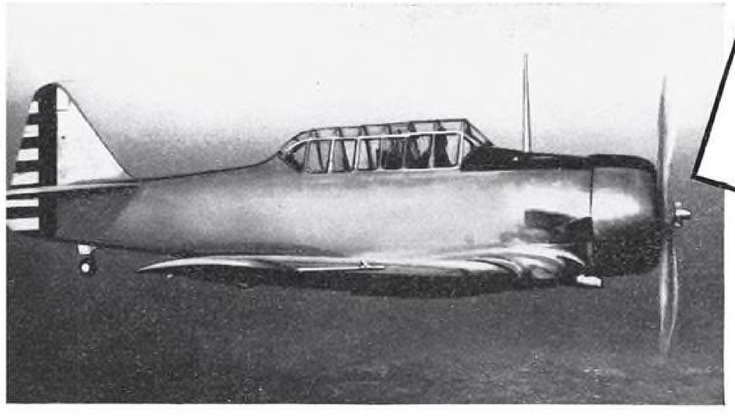

From another NAA plant come North American trainers . . . in which United Nations pilots earn their fighting wings.

RTH AMERICAN AVIATION, INC., Main Plant, Inglewood, Calif.
Member, Aircraft War Production Council, Inc.

Thousands of these bombers, fighters and trainers are the contribution of North American Aviation employees.

ORTH AMERICAN *Sets the Pace!*

New CASH STANDARD Remote HYDRAULIC Control for ENGINE TEST CELLS . .

TRANSMITS OSCILLATING MOTION *without* MECHANICAL LINKAGE

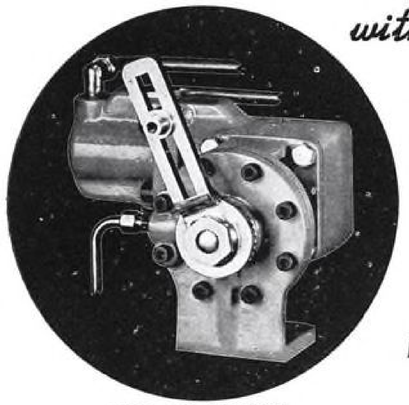

TYPE 550 RECEIVER

"It has the mechanical advantages that we need" say aircraft manufacturers and aeronautical laboratories now using this Type 550 Remote Hydraulic Control.

This CASH STANDARD improved design can be of great value to you, too, in service on engine test cells for controlling throttle position and mixture . . . where it is desired to remotely control the engine from the test boards without mechanical linkage.

Type 550 has positive hydraulic power in BOTH directions . . . no springs, no cups on pistons. It transmits the total force applied to the control lever. Pneumatic brake locks it firmly in any position.

To operate, depress button in control lever with thumb. This releases the automatic brake. Move the control to any desired position. Release button and control is automatically locked in its new position, where it will remain indefinitely.

Mechanical Advantages that make possible the better performance

Positive hydraulic power in BOTH directions (has no springs to provide movement one way).

Transmits the total force you apply to the control lever (no cups on pistons).

No lost motion in either direction.

Pneumatic brake automatically locks Control in any desired position, where it stays locked.

No vent line. The hydraulic circuit is filled by operating the control lever from one extreme to the other.

The inlet connection for the brake is ported to the top of the reservoir in the sending unit. This holds hydraulic pressure in the system equal to the air pressure and prevents air from being drawn into the hydraulic circuit by the vacuum produced by any unbalanced load.

There are two hydraulic lines connecting Sender and Receiver, also one pneumatic line for the air brake.

Sending unit is made for table mounting.

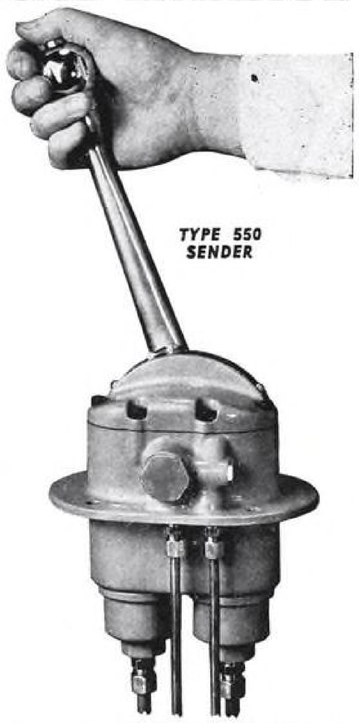

TYPE 550 SENDER

Receiver can be installed above or below Sender.

Lever of Receiver can move 90 degrees.

Receiver lever can be indexed to any desired position.

Mounting bracket on Receiver can be indexed to four positions for convenience in installing.

No mechanical linkage.

Write for data and list of prominent users.

A. W. CASH COMPANY
DECATUR, ILLINOIS

CASH STANDARD CONTROLS . . VALVES

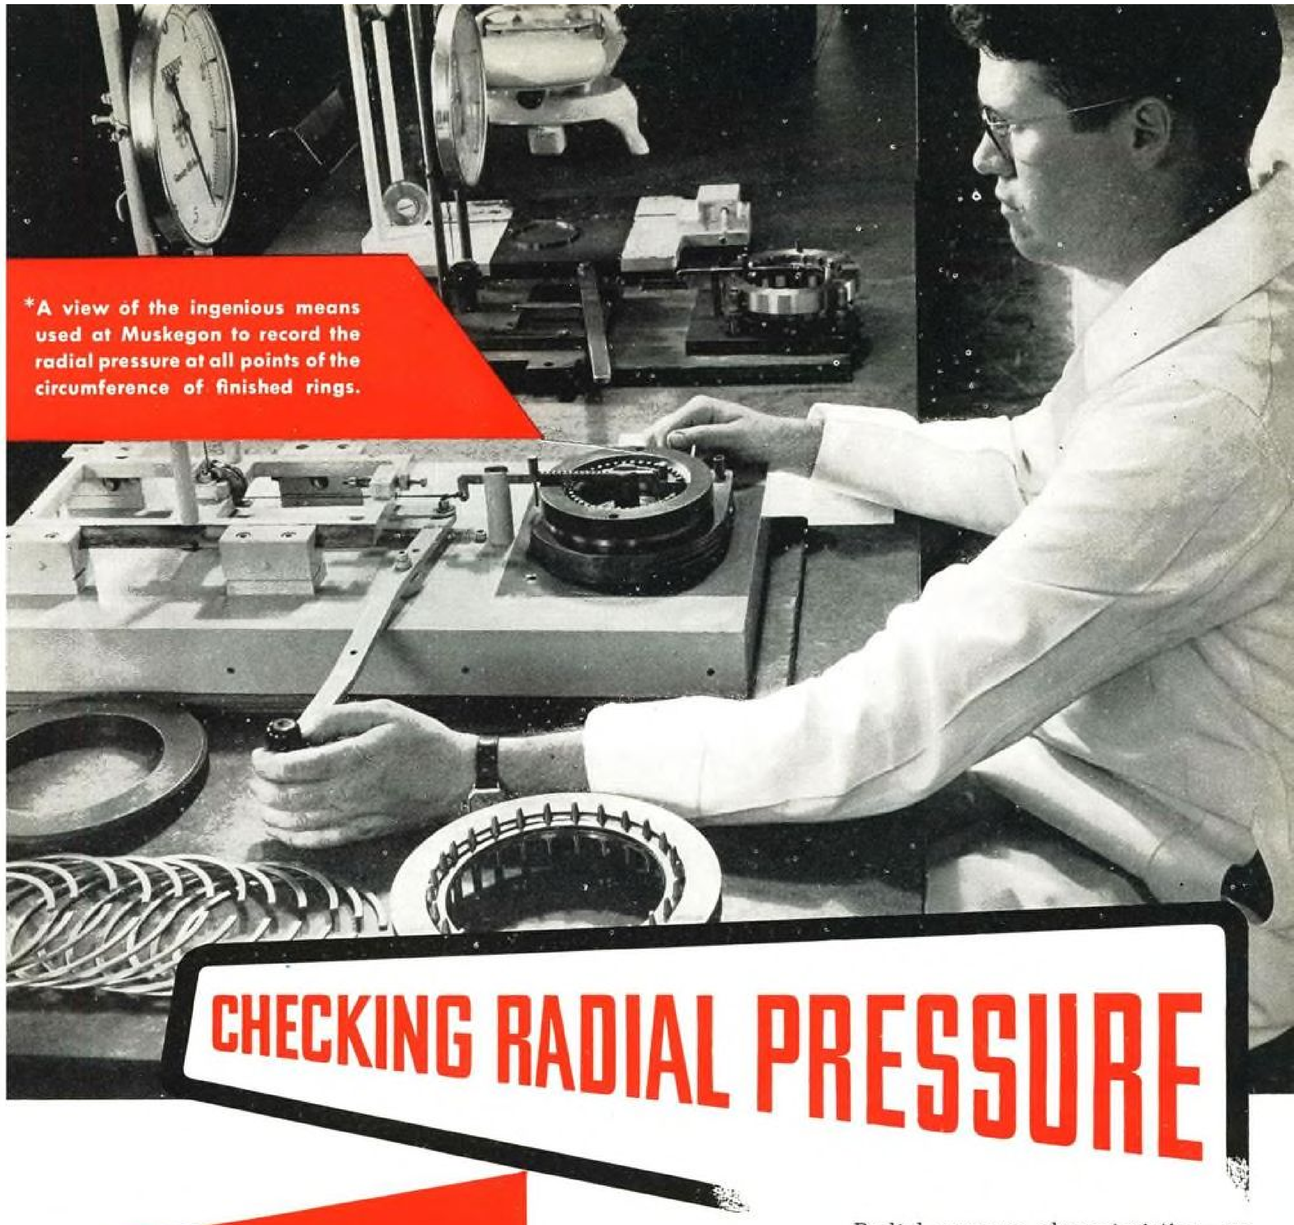

*A view of the ingenious means used at Muskegon to record the radial pressure at all points of the circumference of finished rings.

CHECKING RADIAL PRESSURE

Radial pressure characteristics—so important to the proper functioning of piston rings in modern engines—are the subject of constant study (*) at Muskegon. The proper shape, developed by these studies, is designed into the pattern and subsequent casting since the initial cast shape determines the final result.

In aircraft, tanks and jeeps Muskegon rings and Muskegon's "Spartaloy" and bronze ring castings—by the millions—are performing in war as they did in peace in automobiles, tractors and trucks.

Muskegon engineers are ready at all times to contribute their experience to the solution of your piston ring problems.

MUSKEGON PISTON RING CO.
Muskegon, Michigan
Plants at Muskegon and Sparta

MUSKEGON Piston Rings

MUSKEGON MPR PISTON RINGS

Carry a CANNON... or a COMMANDO SQUAD!

American aviation has superlative answers to these . . . and a host of other "Problems of Victory"

MAY WE QUOTE from two Roebling advertisements appearing in November issues of TIME Magazine . . .

"The weight of a 37 mm. cannon and its ammunition . . . the space it took . . . the tremendous kick of its recoil when fired . . . these were only a few of the problems faced by Bell engineers when, five years ago, they dreamed of the ship that is now the Army P-39 Airacobra . . . a successful middle-altitude fighter with tremendous firepower—*power to punch the panzers . . .*"

And, from the second Roebling advertisement: "Meet the Curtiss Commando—troopship of the skies! And meet, also, the hundreds of engineers who put her there. No, you don't just 'dream up' an airplane capable of hauling a fighting squad with full equipment—and jeeps! You take years to do it (Curtiss started in 1935). You make about 4,000 individual drawings of parts. You check each step against a score of 'What if's . . .'"

Thus Roebling is explaining to the American public how American aviation is meeting each need of war as it comes, with an airplane exactly suited to the job. Explaining, too, the vital part played by engineering in the long job of designing these airplanes and getting them into production. Roebling will continue, during the rest of this year and 1943, to tell the American public more and more about these *names the U. S. must never forget . . .*

Salute TO THE JOB

AERONCA	BOWLUS	CULVER
AIR CRUISERS	BREWSTER	★ CURTISS-WRIGHT
BEECH	CESSNA	
★ BELL	COLGATE	DOUGLAS
BOEING	CONSOLIDATED	FAIRCHILD

THEY'RE DOING!

FLEETWINGS	G & A AIRCRAFT	MARTIN	PIPER	VEGA
FLETCHER	GOODYEAR	McDONNELL	REPUBLIC	VOUGHT-SIKORSKY
FORD	GRUMMAN	NORTH AMERICAN	RYAN	
GENERAL MOTORS	HOWARD		TAYLORCRAFT	VULTEE
	LOCKHEED	NORTHROP	TIMM	WACO

DEPENDABILITY *by the foot . . .*

The dependability and responsiveness of a control system rigged with Roebling Control Cord starts 'way back at the Roebling open hearths, where special steel for it is made. From there, watchful eyes of Roebling veterans nurse the glowing ingot through each step of wire-making. And as the wires are woven, among them lies the Knowledge of a hundred years of wire-rope manufacture, the Experience gained from putting wire rope to work throughout the world, wherever it is used. That is why the name of Roebling has been a part of aircraft building since the days when pilots sat out front, with caps and dusters on.

JOHN A. ROEBLING'S SONS COMPANY
TRENTON, NEW JERSEY
Branches and Warehouses in Principal Cities

ROEBLING

ROEBLING *means Control in the Air!*

ARMY E NAVY

★AIRCRAFT INSTRUMENTS

F.Q. Electro-Pneumatic Jack double-acting with self contained electro-magnetic valve-gear. Used to control radiator flap in conjunction with thermostatic switch. May be used in other applications with suitable switch. Wt. 4# 6 oz — 15⅞" x 3⅜" overall dimension.

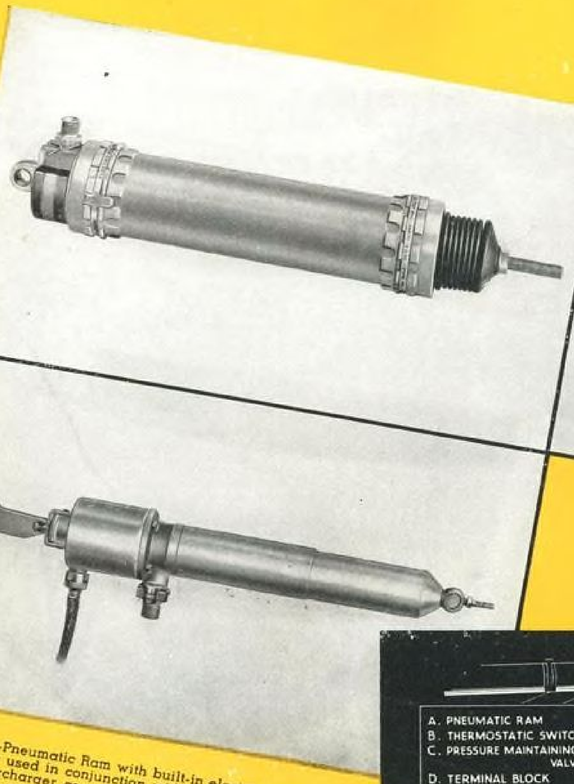

THERMOSTAT. A By-Pass type Thermostat for liquid cooled engines. Quick heat up time. Maximum engine efficiency by temperature Control. Wt. 7#—11⅛" x 5¾" overall dimension.

F.B.G. Electro-Pneumatic Ram with built-in electro-magnetic valve-gear used in conjunction with altitude switch to operate supercharger control gear. Suitable for other mechanisms with manual, thermostatic or other automatic switches. Wt. 2# 1 oz.—11⅛" x 2⅞" overall dimension.

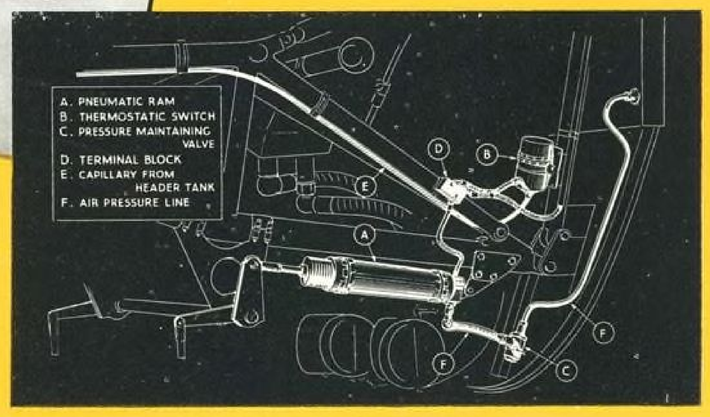

Radiator Flap Control System

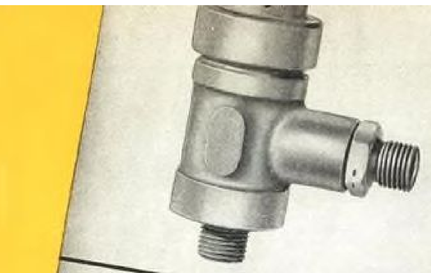

E.V. Pressure Maintaining Valve installed between tank reservoir and high pressure auxiliaries to insure air supply to more important instruments operating on lower pressures. Not a reducing valve. Wt. 6 oz.—2⅛" x 2¼" overall dimension.

F.A.Z. Aneroid Valve to eliminate fuel cavitation by maintaining the correct pressure in the fuel system for all flight conditions. Wt. 1# 2 oz.—4¼" x 5" overall dimension.

F.A.W. Oil Dilution Valve of the electro-magnetic type with a new design for straight thru fuel flow. Available for 12 or 24 volt systems. Wt. 12½ oz.—1⅛" dia. x 3⅝" lg. overall dimension.

D.S. VALVE. Thermostatic Header Tank Relief Valve functioning on true vapor pressure principle. 1. Safety valve to prevent excessive pressures. 2. Provide escape for incondensible gases and maintain minimum pressure on coolant system for all flight conditions. 3. To prevent internal negative pressure. Wt. 1# 14 oz.—5" x 4¼" overall.

F.B.H. Altitude-Operated Switch to control electro-pneumatic jack for changing supercharger speed control at any predetermined altitude. A safety feature design to prevent full supercharge at low altitudes. Wt. 2# 5 oz.—4⅛" x 4¾" over.

F.A.P. Thermostatic Switch to control electro-pneumatic jack operating radiator exit flap. A suitable temperature switch for other electrical applications. Capillary tubing furnished to specifications. Supplied with shock-proof mountings. Wt. 2# 4 oz.—4⅞" x 4⅛" overall dimen.

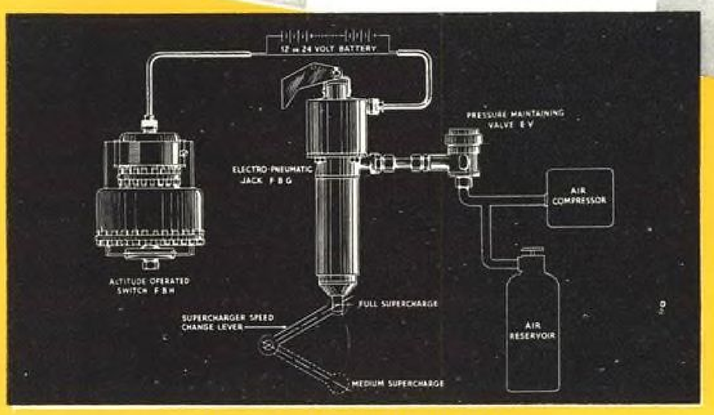

Supercharger Control System

"STANDARD Products—
Standard for the Industry"

STANDAIR

LET'S GO! U.S.A. · KEEP 'EM FLYING!

These aircraft instruments, manufactured by Standard Aircraft Products, are being supplied in volume to major aircraft companies for the versatile fighting and bombing planes of the United States, Great Britain, and their Allies. The planes in which these instruments function—including the Curtis P-40, the Lancaster, Mosquito, and Mustang—daily and nightly are flying over enemy territory. Each Standard Aircraft instrument is a precision product. Each performs perfectly in various altitudes and under all other extreme flying conditions. Let our engineers furnish you with full details on any one or all of these aircraft instruments.

STANDARD AIRCRAFT PRODUCTS, INC.
DAYTON, OHIO

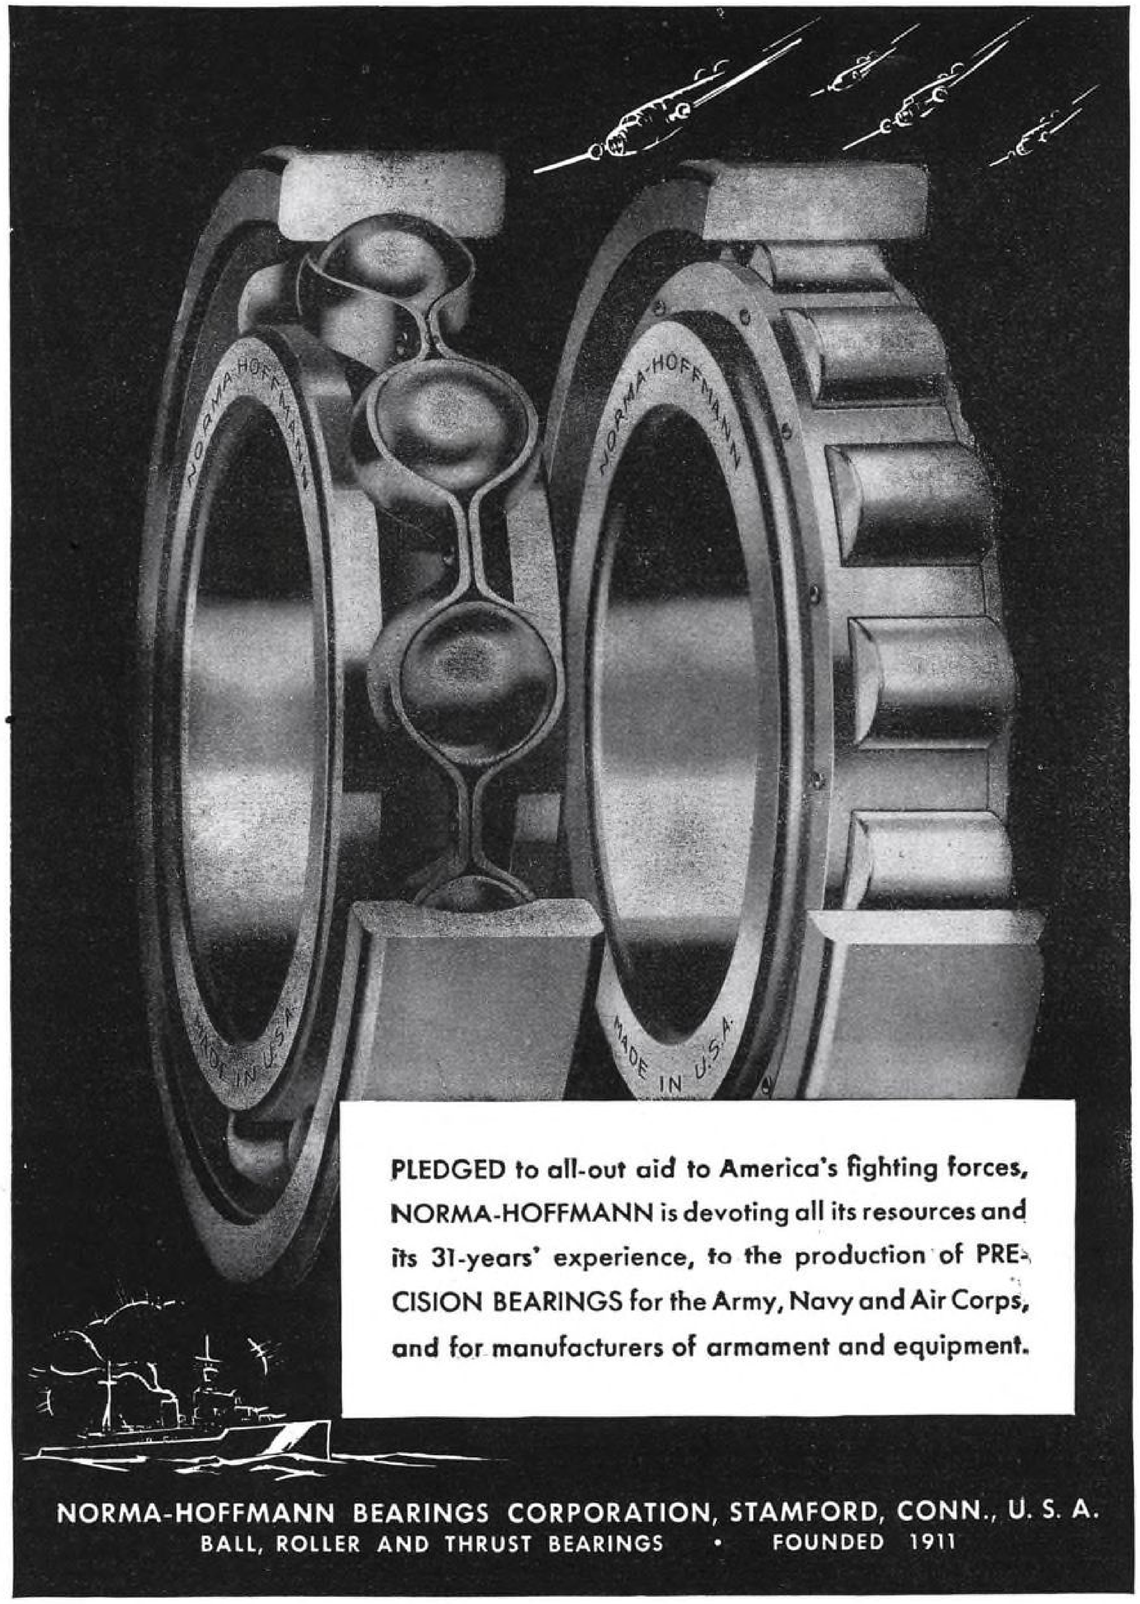

PLEDGED to all-out aid to America's fighting forces, NORMA-HOFFMANN is devoting all its resources and its 31-years' experience, to the production of PRECISION BEARINGS for the Army, Navy and Air Corps, and for manufacturers of armament and equipment.

NORMA-HOFFMANN BEARINGS CORPORATION, STAMFORD, CONN., U. S. A.
BALL, ROLLER AND THRUST BEARINGS • FOUNDED 1911

Boeing B-17 Flying Fortress. Over 100 G-E MAZDA lamps of various types are used on some large bombers to help keep them operating smoothly—and help them get back!

IT TAKES 200 DIFFERENT G-E LAMPS TO BUILD AND FLY AMERICA'S PLANES!

THERE are new lights in darkening Axis skies these days. Every time a bomb is unloaded from an American bomber, a signal light from a tiny lamp notifies the bombardier that the bomb is on its way.

Chances are it's a G-E lamp, one of the many types of lamps developed by General Electric research in America's leading laboratory of light to meet the special needs of aviation.

G-E makes every type of lamp for every type of flying and ground service. And in hundreds of factories modern G-E lighting speeds the manufacture of planes and the production of materials needed to make them. G-E scientists and engineers who are thoroughly familiar with the problems of aviation lighting are ready to consult with you at any time to help you solve your lighting problems. Problems that may range from the elimination of glare at some critical place in a production line to the selection of a lamp specially designed to perform an intricate lighting task. If *you* have a problem, write General Electric Company, Lamp Department, Nela Park, Cleveland, Ohio.

SEE NEXT 3 PAGES

G-E MAZDA LAMPS

GENERAL ELECTRIC

It takes a lot of G-E MAZDA lamps to "KEEP 'EM FLYING!"

General Electric research and manufacturing skill have contributed much to the solution of aviation lighting problems—problems involving special voltages, unusual compactness, special bulbs, special filaments, and exceptional ruggedness. Illustrated on these two pages are some of the G-E MAZDA lamps most widely used in aviation.

Bomb Indicator. Used to show bomb disposition. With amber, green, red or white plastic caps. Actual size.

Instrument Indicator. Tubular shape. A compact lamp built to fit a small space.

Instrument Illuminator. Meets need for an extremely compact source of illumination for airplane instruments. Actual size.

Instrument Illuminator. Blue fluorescent light. Generates near-ultra-violet, making numerals on dials fluoresce. High efficiency, light weight.

Instrument Illuminator. Tubular source of blue fluorescent light for generating near ultra-violet light for illuminating instrument dials.

Instrument Illuminator. Provides visible light for certain instrument lighting. Overall length is one and three-eighths inches.

Instrument Illuminator. Larger bulb for instrument illumination. Greater light output and maintenance where space permits.

Airplane Indicator. Special base insures positive action. Amber plastic dome diffuses light over wide angle. Dimmed by rotating head of base.

Bombardier Training. To outline target area for night practice. Projects both highly concentrated and wide angle beam. Simple, weather-proof.

Gun Sight Lamp. Provides even, well-diffused, high-intensity light for gunsight illumination. Inside frost.

ON THESE PAGES ARE THE 27 G-E MAZDA LAMPS MOST WIDELY USED IN AVIATION



Cockpit Spot. Used with lens to flood whole instrument panel. Bulb-shape developed especially for Air Forces' use.



Cabin Lamp. For general illumination in plane interior. Silvered Bowl minimizes glare.

Map Reading. Light source to be used in reflector to spread light over Navigator's work table.



Astrograph Lamp. Projects equal altitude curves of selected stars on standard plotting chart. Made with extreme accuracy.

Signalling. Flashing signal lamp with special filaments.

Signalling. Hermetically-sealed, "All-Glass" lamp. Lens, reflector, and filament in one. Dust, dirt and moisture excluded.

Emergency. Compact, pocket-flashlight lamp for use if other light sources are put out of action or for ground use.



Emergency. Life-raft marker lamp. Attach to life-raft or to clothing. Lamp is sometimes covered with red dome.

Landing. With all the advantages of hermetically-sealed all-glass units similar to those used on some automobiles.

Landing. High-wattage. Small bulb for use in large reflector.

Beacon. Projection lamp used for rotating beacons to guide planes along the airways. 1000 watts.

Code Beacon. Flashes station code to pilot to give him his location on the airways.



Traffic Control. Rugged projection-type lamp used with color-changing mechanism to signal planes for landing.

Airport Marker. Used in "contact" fixtures to outline runways. Mounted nearly flush with ground. Also used as boundary or obstruction marker.

Portable Airport Approach. Small, high-wattage, short light-center length for compactness. Helps planes land under poor seeing conditions.

Airport Floodlight. 3000-watts. Highly efficient lamp to flood airfields.

One of the most important lamps in aviation is the G-E MAZDA Fluorescent lamp, which speeds production in scores of factories that make planes and products for the aircraft industry.

G-E MAZDA LAMPS
MADE TO STAY BRIGHTER LONGER

GENERAL ELECTRIC

MAZDA 40 W

General Electric can help you break the Lighting Bottlenecks that retard production

Final Assembly of Wing Panels for Curtiss Warhawks involves many parallel production lines close together. Light must penetrate down between the lanes and also into recesses for gasoline tanks and wheels, with no shadows. G-E MAZDA Fluorescent lamps were the ideal solution.

MANY war factories today must increase war production without adding extra floor space, machinery, or workmen!

And many factories are discovering that better plant lighting and better lighting maintenance *are* a practical solution to that problem . . . by breaking common production bottlenecks frequently caused by dirt on lighting equipment, direct glare, reflected glare, interfering shadows, sharp contrasts, or insufficient light.

To help break potential production bottlenecks in your plant, General Electric maintains a staff of trained lighting men whose sole responsibility is to help improve lighting in wartime industry.

One of these men will go into any plant or shop, survey the lighting and give free, unbiased recommendations if improvements are needed. Their job is not to sell but to serve. And their first concern is to avoid unnecessary expenditures for new lighting equipment. In many cases, all they recommend is a rearrangement of present fixtures, proper cleaning of bulbs and reflectors, elimination of glare or shadows.

The important thing is that improved lighting *does* help production, *does* lessen eyestrain among workers, *does* help prevent accidents!

If you run a small war shop or a big war plant, please take advantage of this free service. Telephone General Electric, or write General Electric Company, Nela Park, Cleveland, Ohio.

G-E MAZDA LAMPS

GENERAL ELECTRIC

With G-E Fluorescent Lighting, this girl has no trouble machining landing gear parts for Curtiss Warhawks. With ordinary lighting, shadows and reflected glare would make it a tough job for anybody!

Theresa Myer sews parachutes. And sewing white thread on white cloth is hard on the eyes. But not with cool, efficient G-E Fluorescent lighting. Like other aviation workers, Theresa now does better work with less fatigue—thanks to better lighting.

Albert Smith, examining a bomber turret, is a skilled mechanic at Aircraft Division of Murray Body Corporation. "Having once worked under General Electric Fluorescent lighting," he said, "we certainly appreciate the need of it in doing precision work!"

WHITNEY
AVIATION DIVISION
can help you engineer Aircraft Chains to the job

The Whitney Aviation Division offers a complete service which places all of Whitney's engineering, manufacturing, and technical resources at the direct command of the aviation industry . . . in order to serve more promptly, co-operate more closely, and get required results in shorter time.

This special service is backed by Whitney's extensive experience in engineering roller chains and sprockets into the specialized design requirements of many different aircraft mechanisms and controls. It's a single-minded service that's supercharged for wartime needs. And it's available on a personal, man-to-man basis . . . *any time you say.*

THE WHITNEY CHAIN & MFG. CO., HARTFORD, CONN.

AVIATION DIVISION

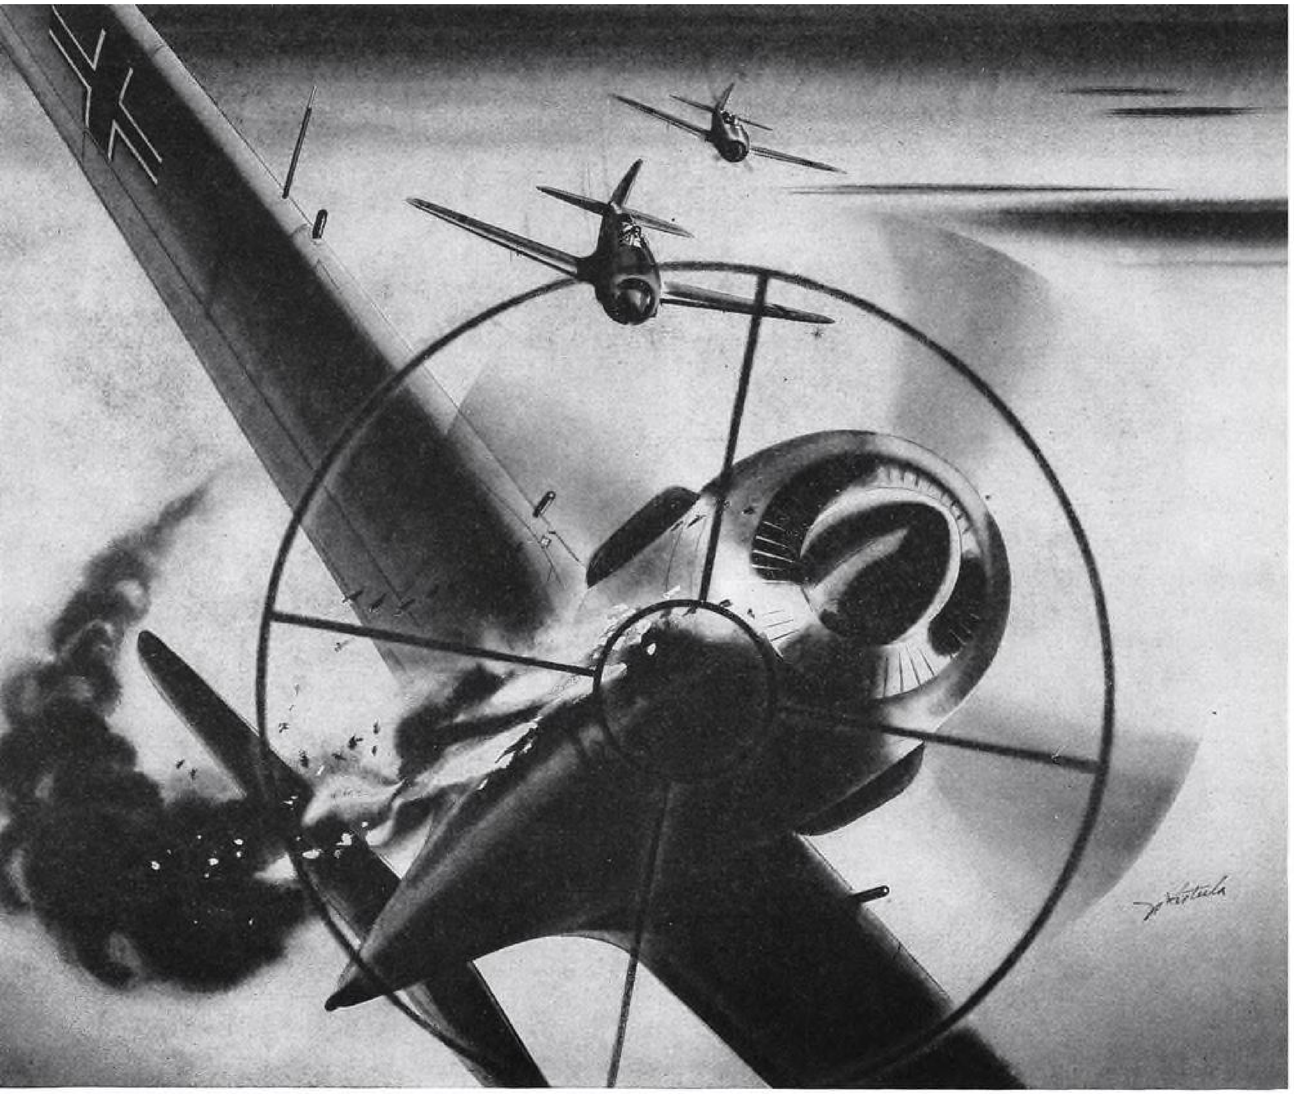

THIS WAY OUT!

Crossing the ringsight of a Browning is the last act for many an Axis pilot! ☆ ☆ ☆ In today's theater of war, American marksmanship and American planes are more and more playing their vital role, in the swing to ultimate victory. ☆ ☆ ☆ Aeronca is proud of its contribution to the "all out" offensive by making training planes for the United States Armed Forces strictly to its own exacting standards of First and Finest. ☆ ☆ ☆ ☆ ☆ ☆ ☆ ☆ ☆ ☆

Aeronca Aircraft Corporation, Middletown, Ohio

The Aeronca Victory Award

The Aeronca Aircraft Corporation pledges its entire resources of equipment and experience to produce only the finest in material and manufacture for the men who are privileged to fly for their country. ☆ ☆ ☆ The — Aeronca Victory Awards — presented to employees for skill that develops better products or creates time-saving operations— are its dedication of an "all out" pledge to win the war in the shortest space of time.

AERONCA

AERONCA

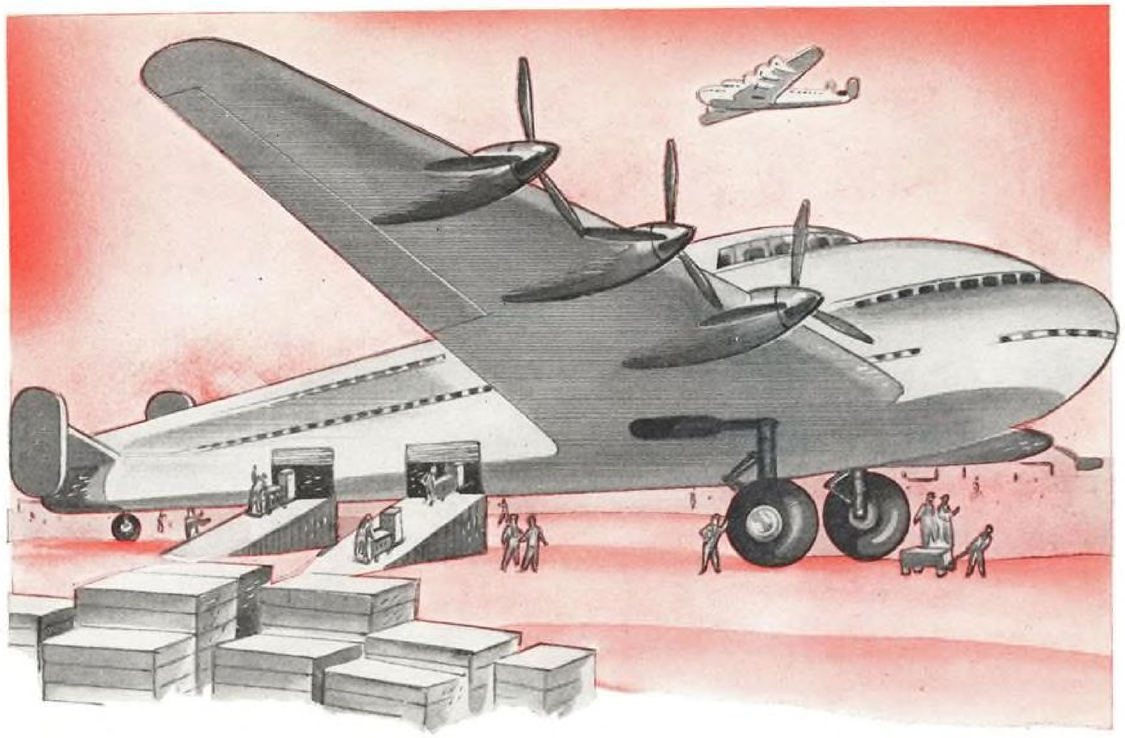

MUCH WILL DEPEND ON MOTORS *in* THE FLYING BOX CARS TO COME . . .

GREAT cargo planes, soon to mark another milestone in aviation history, present a new challenge to builders of motor operated equipment.

Long experience in designing and building motors for all types of special applications, combined with a thorough knowledge of aviation motor problems, has given us the background to develop motors for any type of aircraft equipment.

Thorough engineering, so important for dependable motor operation often requires considerable time for development and testing. Because of this, many manufacturers call on us when new equipment is still in the design stage.

If you have a motor problem, perhaps our experience will prove valuable to your engineering department.

THE BLACK & DECKER ELECTRIC CO.
KENT, OHIO

BLACK & DECKER

★ SPECIAL APPLICATIONS **MOTORS** FRACTIONAL HORSEPOWER

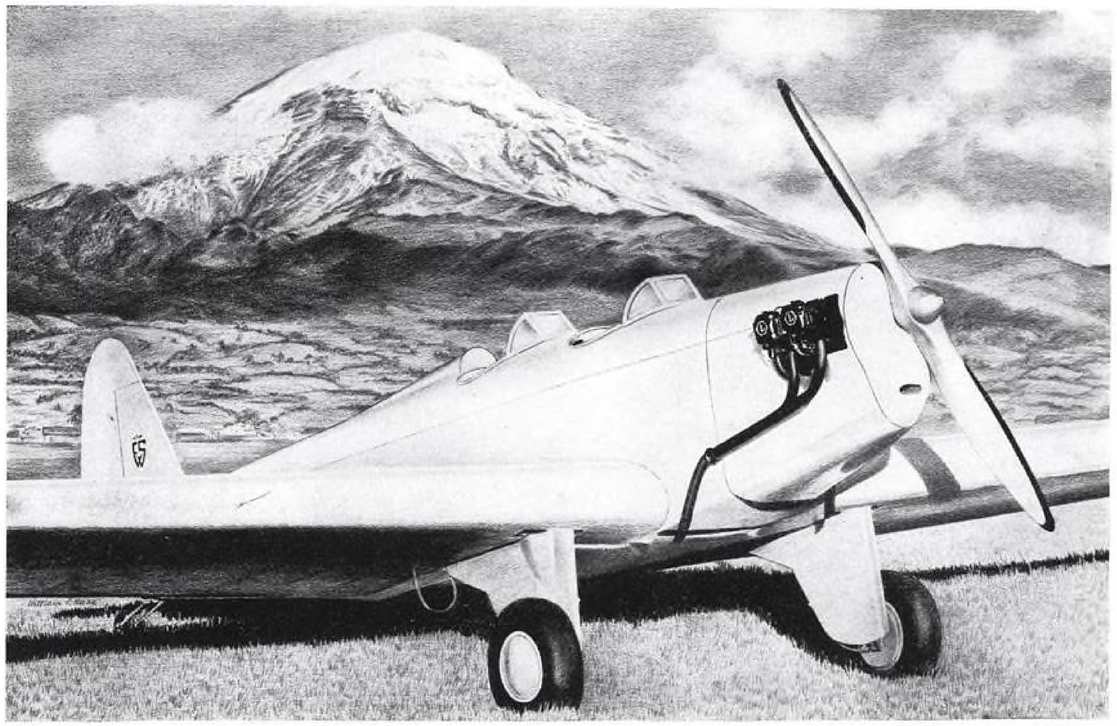

NEW MEXICAN TRAINER
Powered by Lycoming

Primary trainers were needed for the rapidly expanding Mexican Air Force. The answer to this growing need is the Lycoming-powered "Teziutlan" . . . a mahogany plywood trainer. Now in production, it is built almost entirely of Mexican materials and can be repaired in the field by any skilled woodworker. The only imported parts are the Lycoming engines and the instruments.

The "Teziutlan" has performance qualities that make it ideal for the high altitudes of Mexico. It can take off with a run of 164 feet and has a service ceiling of 22,960 feet. Its top speed is 110 m.p.h. and its cruising speed is 102 m.p.h.—yet it lands at only 24 m.p.h.

The Lycoming 125 h.p. engine has been chosen as standard equipment on the "Teziutlan" because of its outstanding performance at high altitudes. Also because, in Mexico as in the United States, Lycoming has for years been considered the synonym for aircraft engine dependability.

YOU CAN RELY ON
LYCOMING
AIRCRAFT ENGINES

ARMY E NAVY

Contractors to the U. S. Army and Navy

THE TRAINING PLANE ENGINE OF TODAY... THE PRIVATE PLANE ENGINE OF TOMORROW

LYCOMING DIVISION, THE AVIATION CORPORATION **WILLIAMSPORT, PA.**

There is never a minute, day or night, somewhere along the world's battlefronts, when there is not a Berryloid-finished plane in the air. The most famous American and Canadian fighters, bombers and trainers, including most of the U. S. shipboard bombers, are finished with Berryloid materials. Outstanding in uniformity and ease of application, Berryloid Aircraft Finishes greatly facilitate maximum combat plane production.

BERRY BROTHERS

DETROIT, MICHIGAN • WALKERVILLE, ONTARIO

BOSTON • JERSEY CITY • CINCINNATI • CHICAGO • ST. LOUIS • INGLEWOOD, CALIF.

BERRYLOID
AIRCRAFT FINISHES

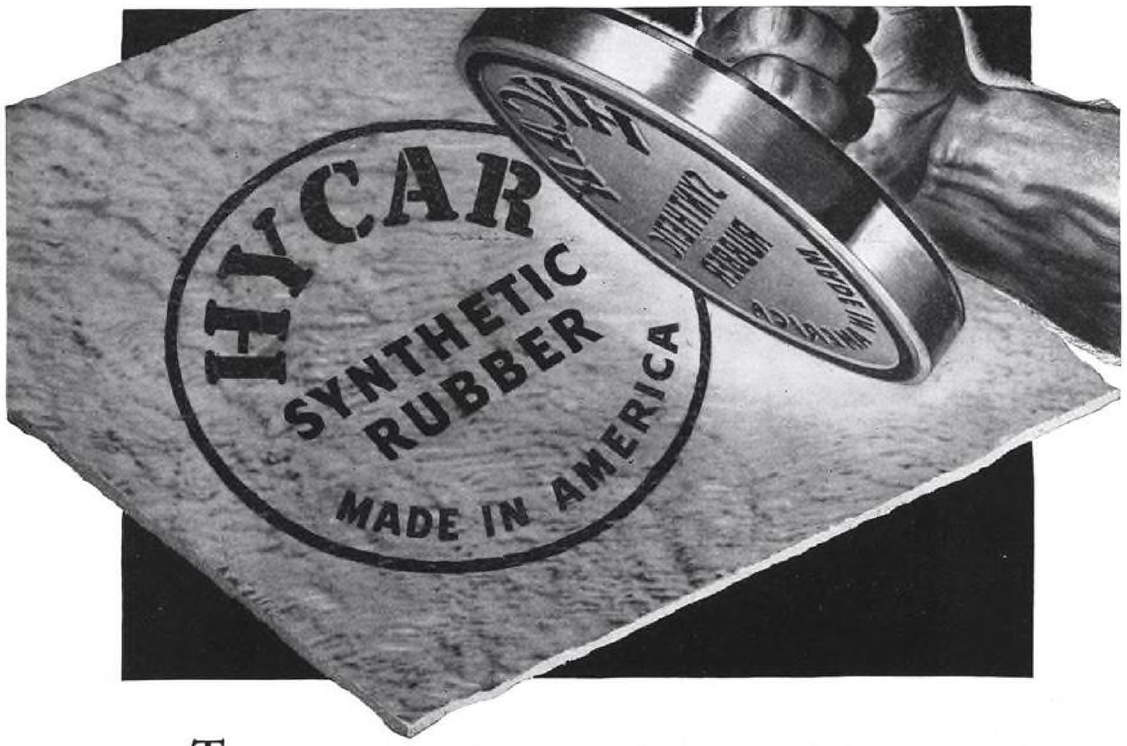

That's the satisfying mark that is being stamped upon rubber products used by Uncle Sam today and that you will use after the war.

Hycar synthetic rubber made in America, by American workmen, and made from materials completely available within the boundaries of the United States, is being produced now in quantity.

The physical properties of Hycar are controlled in manufacture so that in many ways —in performance, long life, and resistance to petroleum—this American-made rubber is better than tree rubber ever was.

Total output of Hycar is now going exclusively to war industry for extremely important uses. Hycar chemists and technicians are working constantly, exploring new formulas, and improving products for these applications.

Hycar is supplied as crude synthetic rubber to the manufacturer of finished rubber products. Your rubber supplier can show you Hycar in many types and forms. Hycar maintains research laboratories and field engineers to cooperate with users and suppliers to determine and control the physical properties needed for any specific application. HYCAR CHEMICAL COMPANY, Akron, Ohio.

QUARTER-MILERS CAN'T WEAR OVERCOATS

The track man out for a record doesn't burden himself with excess weight. Nor should the airplane. That's why so many aircraft builders use Hycar for hose, gaskets, fuel tanks and many other places. Hycar gives you superior resistance to oil and aromatic fuels, heat, abrasion, compression-set and aging—with a bonus of *light weight*. For Hycar is 15% to 25% lighter than many other synthetics.

HYCAR *Synthetic* **Rubber**

LARGEST INDEPENDENT PRODUCER IN AMERICA OF BUTADIENE SYNTHETIC RUBBER

Speaking of Responsibility

Skies never have been rent by lightning like this. Flying higher and faster than any plane ever built, the newest American fighters will write the history of the world from the skies. "Thunderbolts", they are called—better built than any enemy ship now known . . . better than the Messerschmidt, the Focke-Wolfe 190, or the Jap Zero, excelling even the formidable Spitfire and Hurricane.

When 2,000 horsepower of such flying fury maneuver into fighting position . . . that's when every control must function without fail. Dumore *Aeromotors* are providing the power for important equipment in leading warplanes, power for cowl and wing flaps, inter-cooler and oil-cooler exit flaps, anti-icer metering pumps, de-icer distributing valves, ammunition booster units, aerial cameras, flare and bomb releases.

Install Dumore *Aeromotors* for dependable performance of all equipment, under all flying conditions. Dumore engineers will help you in the application of fractional motor-power to automatic devices, as they have the builders of the best bombers and fighters in the world.

★

THE DUMORE COMPANY
382-M, RACINE, WISCONSIN
Builders of Fractional Horsepower Control Motors

★

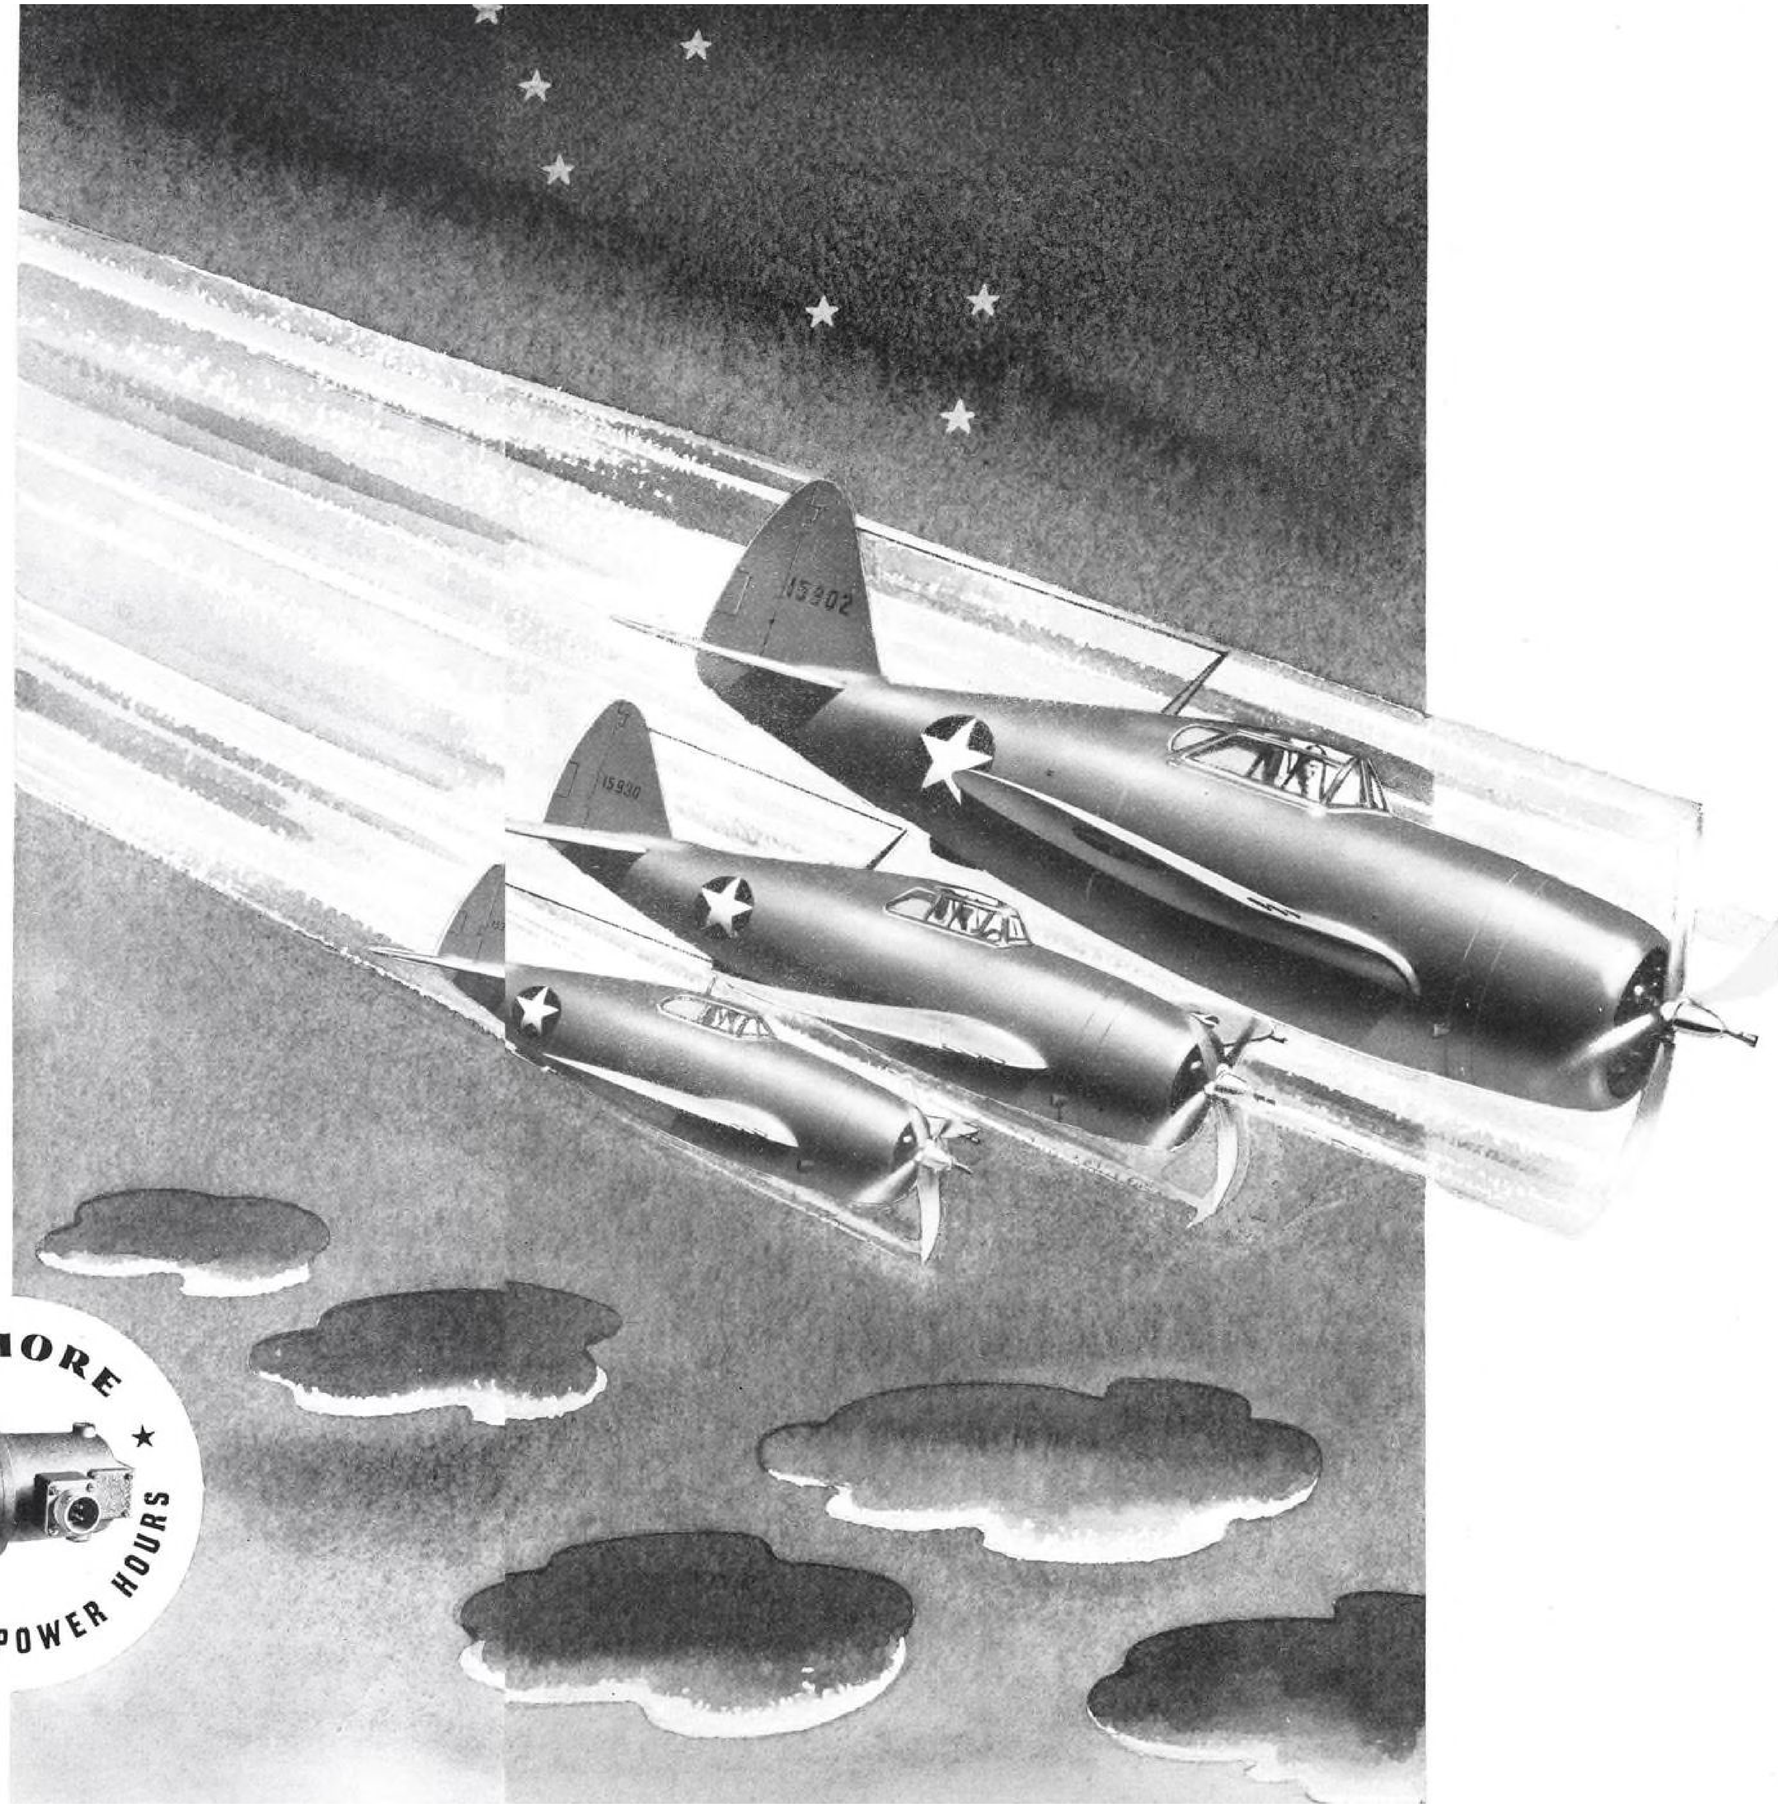

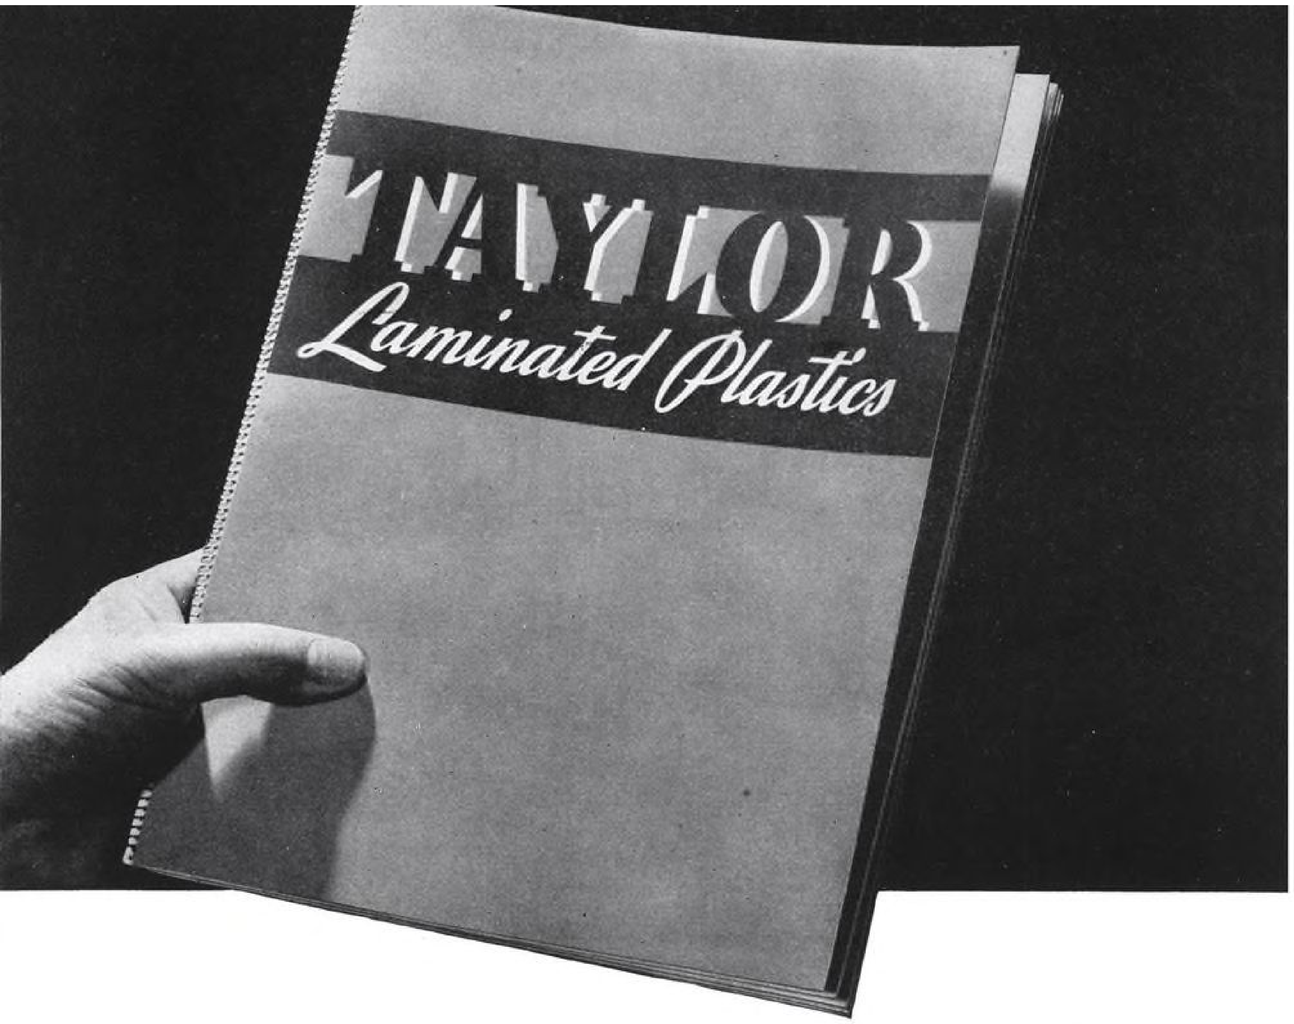

Ask for Your Copy of This 56-Page Handbook

Featuring:

Valuable, timely information on Laminated Plastics construction of vital Aircraft Parts... on Vulcanized Fibre and Phenol Fibre for Electrical Insulation... for Radio... for Electronics... for Silent Gears and other mechanical uses. Write for your copy on your business or official stationery.

TAYLOR FIBRE COMPANY
NORRISTOWN, PA.
Pacific Coast Headquarters: 544 South San Pedro Street, Los Angeles, Cal.

TAYLOR

AMINATED PLASTICS • Vulcanized Fibre • Phenol Fibre • ***SHEETS, RODS, TUBES, FABRICATED PARTS***

. . . and with

MID-CONTINENT AIRLINES

". . . air worthiness is maintained . . .

by using **Snap-on Tools"**

To the unqualified endorsement of every major airline, Mid-Continent — *The Great Plains Route* — adds its commendation of Snap-on Tools. "Our mechanics thoroughly understand the importance of maintaining aircraft in a state of airworthiness," says Robert B. Burnett, Mid-Continent Superintendent of Maintenance, "and they have therefore maintained the required standard of workmanship by using Snap-on Tools."

Fine mechanics work with fine tools . . . and America's vast aviation industry has attracted and developed the greatest army of fine mechanics the world has ever known! Everywhere in the industry . . . on far-flung assembly lines and in great parts plants . . . in teeming training schools and in maintenance and overhaul shops across the land . . . Snap-on's superior speed, flexibility and durability have won outspoken preference. Snap-on's 3,000 tools and direct-to-you service are conveniently near you from 35 factory branches at key aviation centers throughout the United States and Canada. Write for catalog and full information.

Disassembling a crankshaft is one of the many efficient uses of Snap-on wrenches.

•

The precision work of cylinder head overhaul finds MCA mechanics using Snap-on tools.

OVER 3000 HAND AND POWER TOOLS — FROM MIDGET WRENCHES TO HEAVY DUTY UNITS

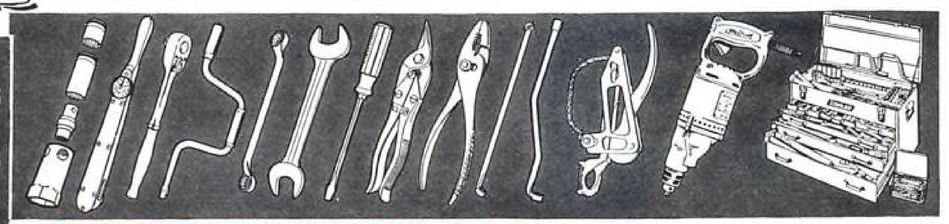

SNAP-ON TOOLS CORPORATION, 8020-L 28th Avenue, Kenosha, Wisconsin

There's a Drafting Board

AWAITING YOUR SHEET STEEL PROBLEM

at BERGER

● If you have a problem concerning the design or engineering of sheet steel for high-priority production today—or for after-the-war markets—the place for it is on a drafting board at Berger.

Here competent craftsmen are ready to attack it with the experience and knowledge that has been acquired during more than 50 years of fabricating sheet steel.

During that half century, Berger has assisted many manufacturers in the improvement of their products—in helping to make them lighter, stronger, more efficient, more durable, more attractive and salable, more economical—through the application of sheet steel.

During that time, too, Berger has designed and manufactured a comprehensive line of standard sheet steel products on a quantity basis.

So, whatever your problem concerning the design and fabrication of products made of sheet steel, you may save considerable time and money by utilizing the experience and facilities awaiting you at Berger.

BERGER MANUFACTURING DIVISION
REPUBLIC STEEL CORPORATION
CANTON • OHIO
Culvert Division • Niles Steel Products Division
Steel and Tubes Division • Union Drawn Steel Division
Truscon Steel Company
Export Department: Chrysler Building, New York, N. Y.

Merchandising Units • Cabinet Enclosures • Kitchen Cabinets • Building Products • Office Equipment • Lockers • Shelving

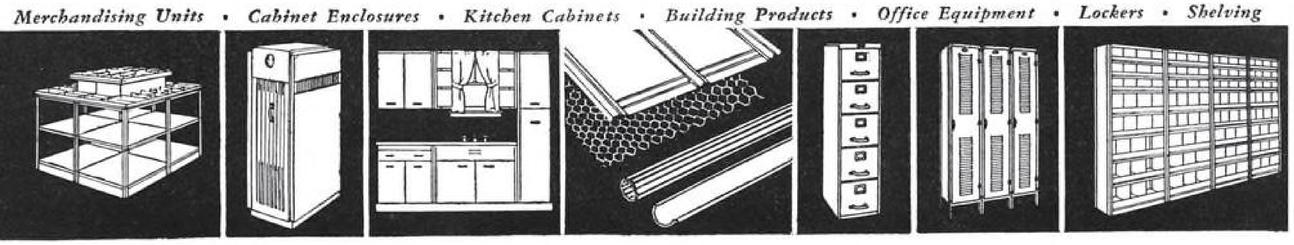

The items shown above are only a very few of the products which have been manufactured of sheet steel by Berger. There are many others on the complete list.

BERGER
DESIGNERS • ENGINEERS • FABRICATORS OF SHEET STEEL PRODUCTS

When considering sheet steel, remember these qualities: strength, light weight, durability, fireproof, versatile in design, variety of finishes, low cost.

BEARINGS THAT FLY

Must Have "What It Takes"

This remarkable new testing device is built on tracks that permit aircraft engines to be operated in positions of actual flight.

No other application in mechanical history has ever demanded so much from bearings of the size and weight of those supplied by Bunting for modern aircraft engines. New and unprecedented limits are imposed on all operations in the manufacture of these bearings. If unusual requirements today involve a bearing problem, Bunting experience and resources can aid you. The Bunting Brass & Bronze Company, Toledo, Ohio. Warehouses in All Principal Cities.

Bunting

BRONZE BUSHINGS • BEARINGS • PRECISION BRONZE BARS

MEN AND EQUIPMENT *On the Move,* IN RAIN, SLEET AND SNOW

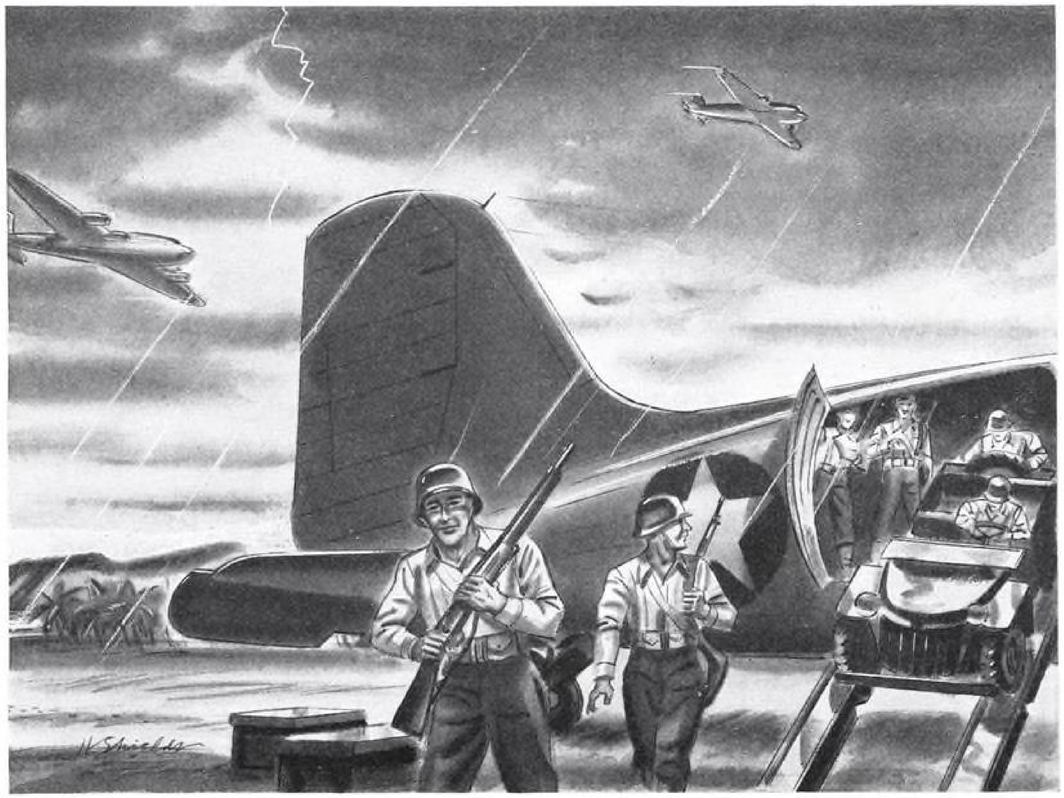

NO TIME OUT in this man's war. Our aircraft must get through in good weather and in bad. The MARQUETTE ALL-WEATHER WINDSHIELD WIPER assures clear vision . . taking off, in flight and in landing.

ARMY E NAVY

Marquette

The Marquette

METAL PRODUCTS CO.

1145 GALEWOOD DRIVE • CLEVELAND, OHIO

★ Piston ring engineering helps win battles! ★

Back of every gun, every tank, every ship, every airplane in this battle scene are engineers. The outcome of many battles in modern warfare rests in the hands of engineers.

Sealed Power engineers have sought to excel all past achievements in the production of piston rings, pistons and cylinder sleeves for Army, Navy, Marine Corps, Air Force and Merchant Marine.

Sealed Power men and women are putting forth every effort to produce the finest products in the shortest possible time.

Engine manufacturers, car and truck manufacturers, plane builders, boat builders, repairmen, fleet operators, Army and Navy officers are constantly consulting with Sealed Power Engineers on major engine problems.

SEALED POWER CORPORATION

Piston Rings, Pistons, Cylinder Sleeves for all types of internal combustion engines, pumps, compressors, etc.

Muskegon, Michigan • Windsor, Ontario

BUY MORE WAR BONDS

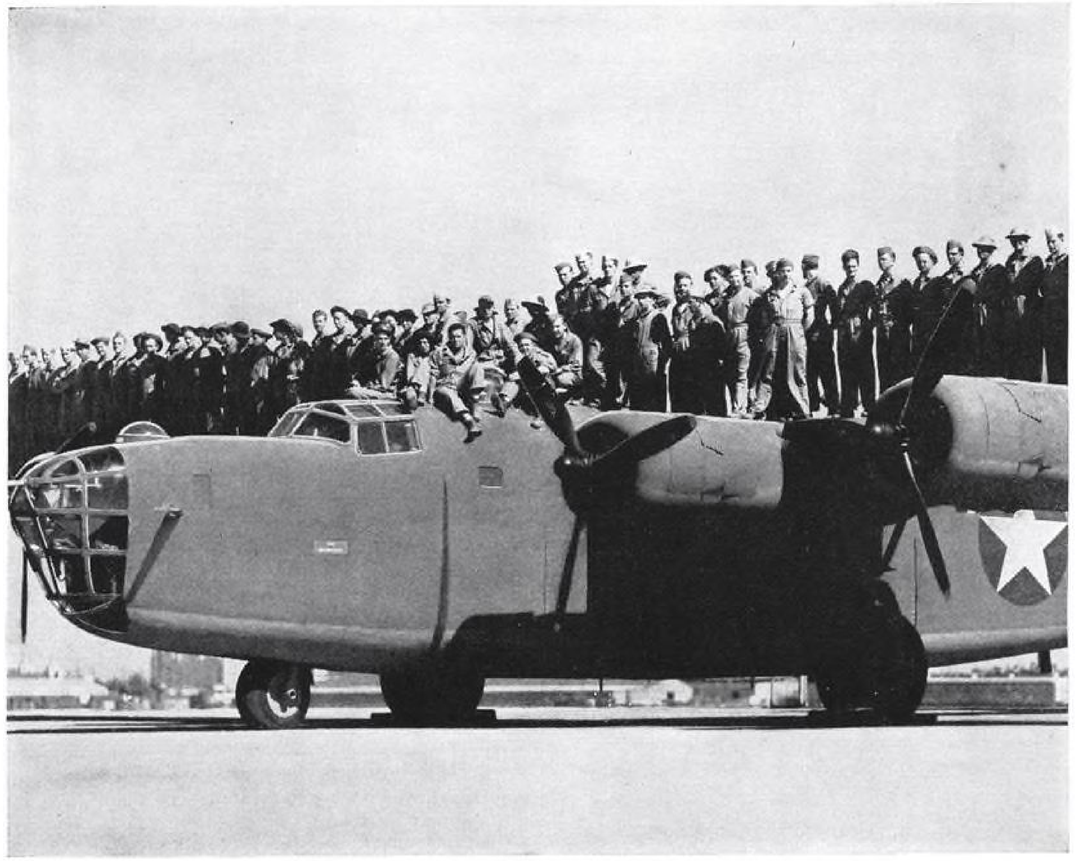

★ *These men standing on the wing of their big Consolidated Liberator were formerly plumbers, druggists, clerks, garagemen, farmers. Now they've finished their training at Camp Consair and will soon scatter to overseas bases of the Army Air Forces to take their places as skilled mechanics in bomber ground crews.*

PROBLEM:

It takes a lot of men on the ground to keep a big Army bomber like the Consolidated B-24 Liberator in the air.

Long ago, the Army Air Forces realized that their ground-crew training program must be greatly speeded up. What's more, they urgently needed actual bombers for instruction purposes.

But they knew that each bomber, held back as a ground-crew "classroom," meant one less bomber in action against the Axis. *The bombers simply couldn't be spared!*

SOLUTION:

Consolidated brought the boys to the bombers!

Almost overnight – before the first 500 boys arrived – the company built Camp Consair, complete with barracks, mess halls, and classrooms.

Here, on a three-shift basis, for a 28-day school period, the boys of the AAF Technical Training Command are now taught to maintain the very bombers they will later service.

The bombers themselves, as well as the tools, equipment, and manuals, are provided by Consolidated. The instructors are the men who built the bombers.

The boys are taught to tear down and reassemble the engines. They learn the intricacies of the power turret assemblies, the landing gear, the hydraulic system, and the electrical installation. In short, when they leave, they know their plane forward, backward, and blindfolded!

Consolidated, who believes that its responsibility does not end when a bomber rolls off its assembly line, is proud that it can make this important contribution to the training of Army Air Forces personnel.

CONSOLIDATED builds Battleships of the Air

LIBERATOR . . . CORONADO . . . CATALINA

Roots for Victory...

Like the Harvest, America's production is the fruit of many labors. To those who have helped so greatly in the past year — the planners, the builders, the workers . . . the men in many fields of activity whose efforts have speeded our program — Wright extends its appreciation for accomplishment.

WRIGHT *Aircraft Engines*

POWER THE TONNAGE OF THE AIR

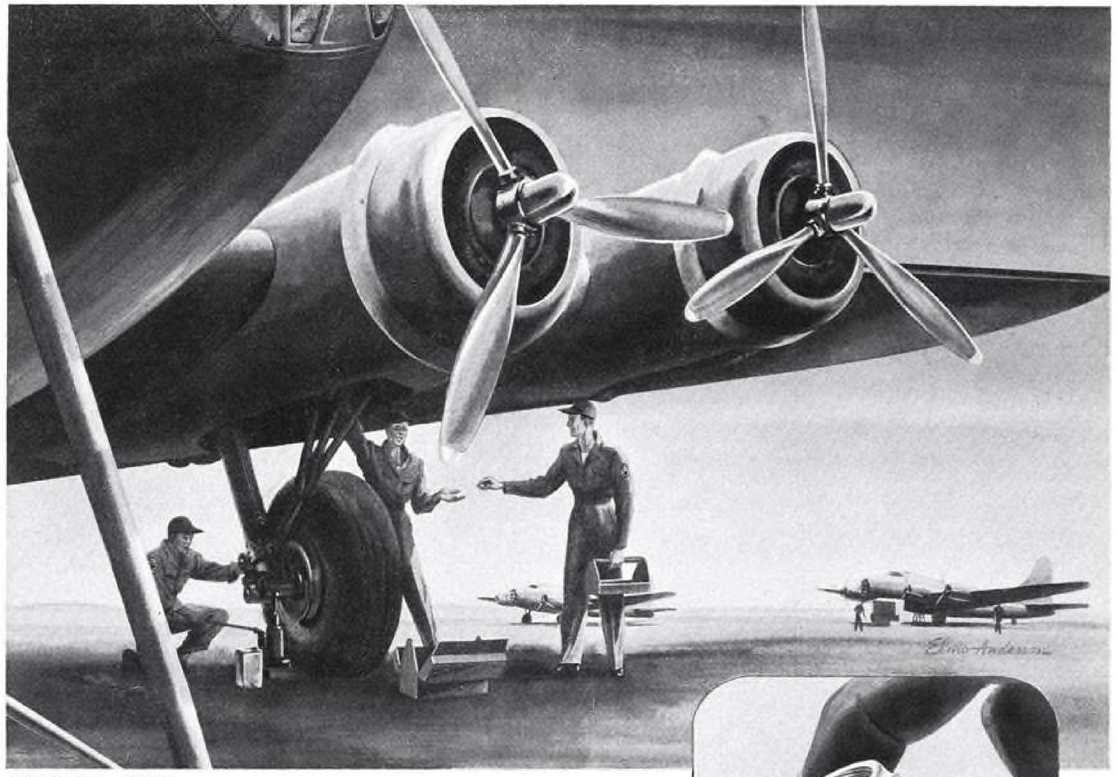

Field-Servicing a B-17E

"THE LIEUTENANT WILL BE GLAD TO KNOW"...

Any pilot is glad to know that the ship he flies is protected with Boots all-metal, self-locking nuts. That knowledge gives him an added sense of security, because Boots Nuts are safer; even the severest vibration cannot jar them loose. They are unaffected by the corrosive action of oil, chemicals, or weather. Their resistance to high temperatures is almost phenomenal. In fact, they literally "outlast the plane."

Not only that, but, because they are more easily applied, they cut down the time a plane must spend on the ground for maintenance and repairs. And, of course, that means more *fighting* time, which is the most important consideration of all.

On every battle front in the world, on every type and 'most every make of plane, these ingenious fastening devices are contributing to the striking power of our Air Force.

It's Self-locking

The Boots principle of self-locking as employed in the Bellows, Wing, and Rol-Top (illustrated above) styles are well-known throughout the aircraft industry. In each case the nut is one-piece, all-metal. The self-locking action is obtained by means of the out-of-phase locking collar connected to the lead threads by means of a resilient spring member.

Here are a few of the planes fabricated with Boots Nuts:

Grumman Wildcat F4F-3
Boeing Flying Fortress B-17
North American B-25
Curtiss Commando C-46
Consolidated Liberator B-24E
Curtiss P-40
Curtiss Dive Bomber SB2C-1
Edo Floats
Plywood Planes
Brewster Buccaneer

BOOTS

Self-Locking Nuts For Application In All Industries

BOOTS AIRCRAFT NUT CORPORATION ★ GENERAL OFFICES, NEW CANAAN, CONNECTICUT

QUALIFICATIONS FOR GLIDER PILOT TRAINING 1. Men between the ages of 18 to 35 inclusive, holding a currently effective C. A. A. Airman's Certificate, private grade, or higher. 2. Or, holding a C. A. A. Airman's Certificate, private grade or higher, that has lapsed since January 1, 1941. 3. Or, a certified statement showing completion of 200 or more glider flights. 4. Or, if you are a former aviation cadet or aviation student, who has completed at least 50 hours of total flying time, either dual or solo, at any Army, Navy or other service flying school. . . . . ***Get in touch with your nearest recruiting office.***

IMPACT STRENGTH!

Out of the silent skies will come shock-invasions of the Winged Commandos. These swift-gliding champions will hurl their impact strength when and where the enemy is least prepared.

Impact strength rides with them in their gliders. Aero-Quality Lumarith is used in cockpit enclosures, windshields and ports. Lumarith Molding Materials are used for many other vital glider and 'plane parts. The impact strength of these super-tough plastics—even at the low temperatures of high altitudes—is greater, in some cases, than the strength of other plastics at room temperatures.

Cockpit Enclosures OF LUMARITH REG. U. S. PAT. OFF. **FOR THE Winged Commandos**

One of the lightest and most transparent plastics known, Lumarith is shatterproof. It speeds production because it is easy to form—simple curves can be formed without heat. Lumarith resists crazing. It is impervious to water and has excellent weathering qualities.

Celanese Celluloid Corporation, 180 Madison Ave., New York City, a division of **Celanese Corporation of America** Sole Producer of **Celluloid*** (cellulose nitrate plastics, film base and dopes) . . . **Lumarith*** (cellulose acetate plastics, film base, insulating, laminating and transparent packaging material and dopes) . . . **Lumarith* E. C.** (ethyl cellulose molding materials) . . . **Trademarks Reg. U. S. Pat. Off.*
Representatives: **Dayton, Chicago, St. Louis, Detroit, San Francisco, Los Angeles, Washington, D. C., Leominster, Montreal, Toronto.**

CELANESE CELLULOID CORPORATION
The First Name in Plastics

THE R.A.F.'s *Hit and Run* SPECIALIST!

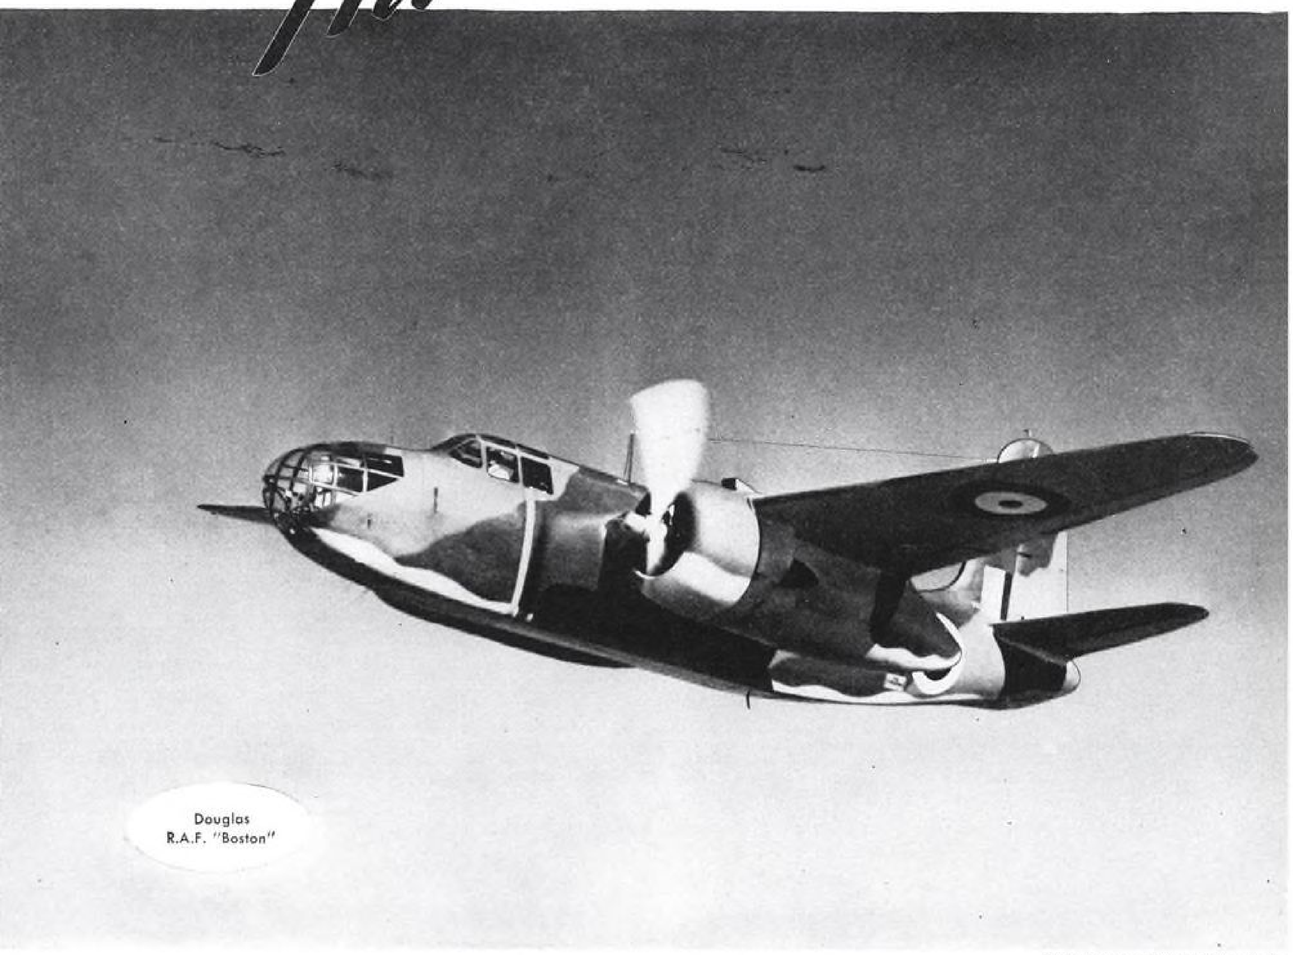

Douglas
R.A.F. "Boston"

Photo courtesy Douglas Aircraft Co.

THIS shifty bomber can dart in and unload its bombs right on top of a target. It's fast enough to outsmart ack-ack gunners and dodge enemy interceptors. Such performance calls for a high degree of maneuverability—controls must respond to instant demands without friction, without drag, *without fail!*

Fafnirs guarding control efficiency supply the needed, extra margin of safety at the vital points of motion on many American-built battle planes figuring in the headlines these days. Fafnirs have always played a brilliant part in the development of our great aircraft industry. From "barnstormer" to airliner to fighting plane—Fafnirs on the controls have meant positive responsiveness and freedom from friction. The Fafnir Bearing Company, Aircraft Division, New Britain, Connecticut.

ARMY NAVY

Send for copies Fafnir Aircraft Service Manual, you will find it an invaluable service guide.

STA-KONS

T&B Small Wire Terminals for the Aircraft Industry are available with

INSULATION GRIP

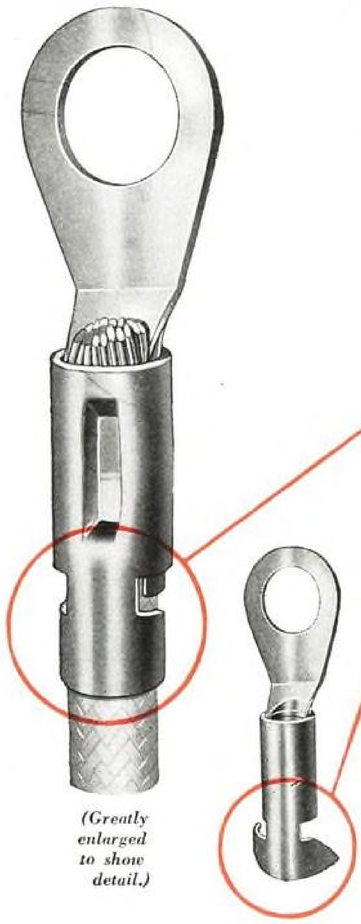

(Greatly enlarged to show detail.)

THE INSULATION GRIP hugs the insulation and supports the wire. It takes the brunt of the stress and strain due to sharp bends, vibration, etc. It cuts down stress on the strands of the copper conductor at the terminal to a minimum. Gripping Ears are *wrapped around* the insulation and interlock firmly. Because of their design, they cannot injure the insulation.

Both Hand Tools and Bench Tools are offered for staking these T&B Pressure (solderless) terminals and wrapping the Insulation Grip.

For complete engineering data see your new T&B Aircraft Catalog No. 36, or write us your particular requirements.

T&B

THE THOMAS & BETTS CO.

INCORPORATED

MANUFACTURERS OF ELECTRICAL FITTINGS SINCE 1899

ELIZABETH, NEW JERSEY

POWER TO WIN

Continental Red Seal Engines — dependable sources of power for more than 40 years — are now being produced in ever increasing volume. Continental "Power to Win" is the coordinated result of advanced engineering, research, and manufacturing skill.

Your dollars have power, too . . . Buy War Bonds

Continental Motors Corporation

Aircraft Engine Division

MUSKEGON, MICHIGAN

There's Stamina and Performance

with

McQUAY-NORRIS

ALTINIZED

PISTON RINGS

PISTONS . . PINS . .

HARDENED & GROUND PARTS

McQuay-Norris, a pioneer manufacturer of parts in the automotive field, is devoting itself in increasing measure to the aviation industry. Our Aircraft Division projects the McQuay-Norris policy of clinical research into this important field with the result that we are continually adding to available parts, technical assistance and research experience. Your inquiries are invited.

WORKERS IN IRON, STEEL, ALUMINUM, BRONZE, MAGNESIUM

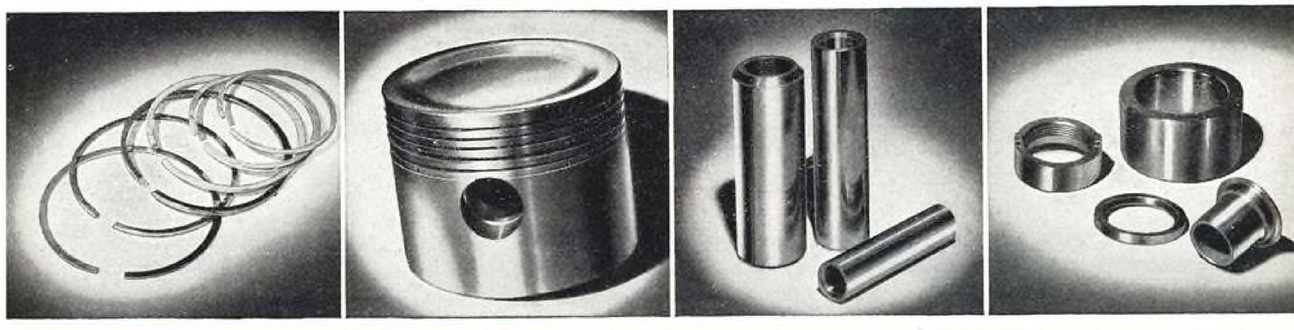

McQUAY-NORRIS MFG. CO. (AIRCRAFT DIVISION), ST. LOUIS, U. S. A.

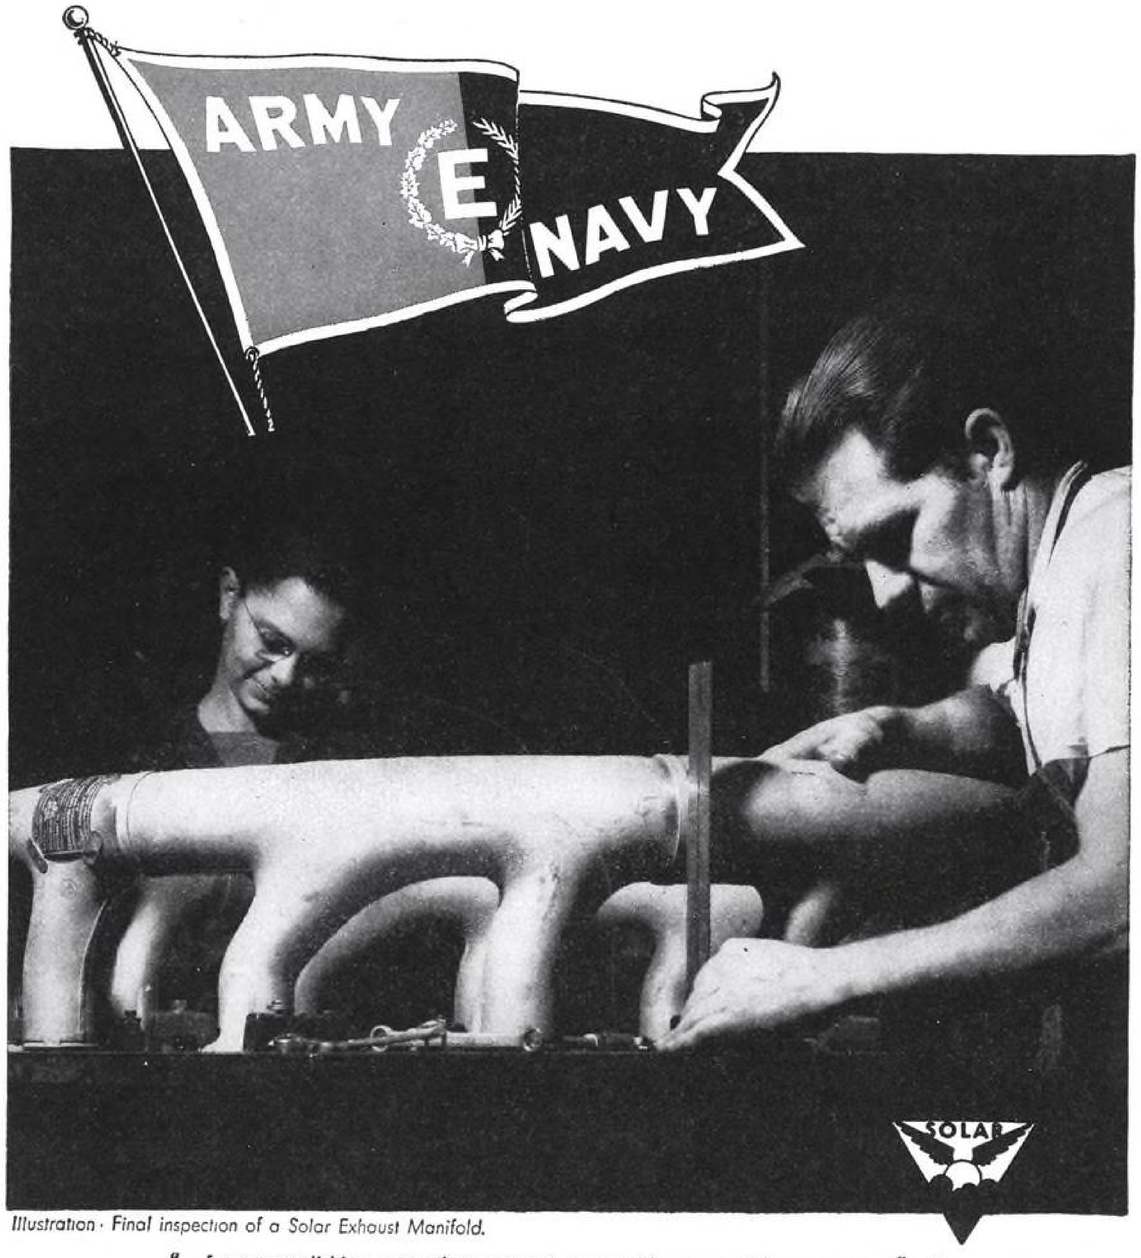

Illustration · Final inspection of a Solar Exhaust Manifold.

"—for accomplishing more than seemed reasonable or possible a year ago"—the men and women of Solar Aircraft have received the Army-Navy Production Award. Proudly will this pennant fly—an inspiration to greater achievement.

ARMY E NAVY

SOLAR

EXHAUST SYSTEMS—

SOLAR AIRCRAFT COMPANY ★ SAN DIEGO, CALIFORNIA

and now ---

THERE IS NO GEAR TOO SMALL TO BE FINISHED BY "SHAVING"

A one inch diameter annular gear being finished on a new Michigan 861-4B.

The new Michigan 861-4B which will accurately finish machine the minutest gear in far less time than it takes to read this advertisement.

For the past few months we have been busy telling you about the new "Michigans" on which you can shave gears up to 4 ft. in diameter.

Now we would like to introduce to you the new Michigan 861, designed for the producer of small gears—for instruments, for control mechanisms, etc.—from a maximum of four inch diameter down to as close to zero diameter as you can make a gear.

It will handle gears up to 1 inch face width and down to "nothing". The gears can be mounted on shafts up to 9 inches long or they can be annular types with no shafts at all.

Just rough them out, put them on the Michigan 861-4B crossed axis gear finisher and in a few seconds they will be finished to within tenths of a thousandth.

MICHIGAN TOOL

7171 E. McNICHOLS ROAD *Company* DETROIT, U.S.A.

Just by KEEPING WELL
You can help win this war!

"It would help save the doctor's time if you'd come to his office, Mr. Jones."

FOLLOW THESE 5 RULES

Memorize these five keys to good health. Follow them carefully — for your own welfare and for victory.

1. Eat Right

Milk, butter, eggs, fish, meat, cheese, beans and peas, fruit, green leafy vegetables and the yellow ones, whole-grain or enriched cereals and bread — these are the *key* foods. Eat plenty of them. *And* eat 3 meals a day!

2. Get Your Rest

Regularity counts most. You can't catch up on *lost* sleep or *missed* relaxation! Try to keep on a regular schedule every day. Take it easy for a little while after lunch and dinner. Go to bed on time, get up on time.

3. See Your Doctor Once a Year

You have your *car* checked and serviced every thousand miles. Do as much for your body. Physicians can *prevent* many diseases and illnesses for both children and grownups nowadays. Give your doctor a chance *now,* BEFORE you get sick. Go to see *him!*

4. Keep Clean

Plenty of baths, lots of soap. Clean hands, clothes, houses, beds! Get fresh air, sunshine. Drink lots of water.

5. "Play" Some Each Day

Romp with the family, visit with friends, take walks, play games — or do whatever you like to give your mind and body a change from the daily grind on the job. "All work and no play makes Jack a dull boy."

(Courtesy, Institute of Life Insurance)

THIS SPACE CONTRIBUTED BY THE BG CORPORATION

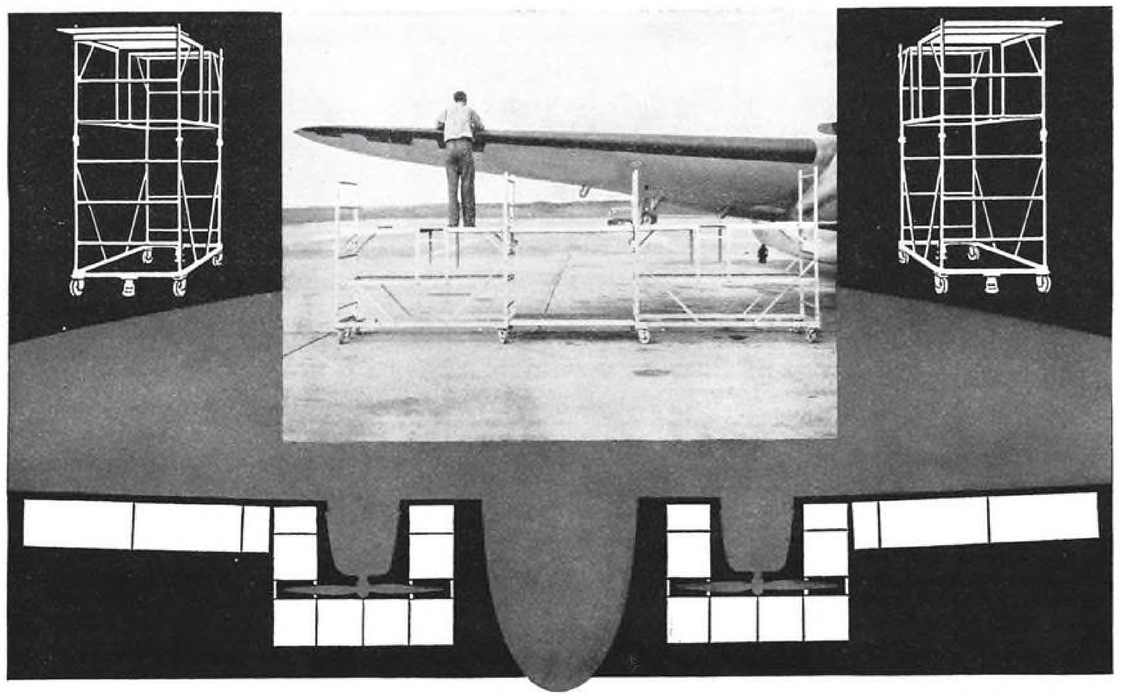

A Platform Where You Want It—As You Want It

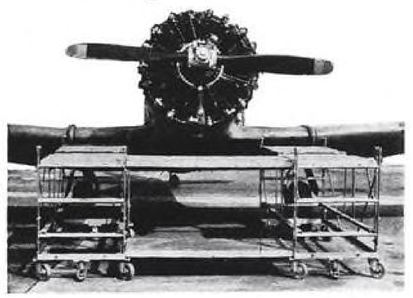

Photo at top of page illustrates the manner in which a 22 ft. straight line stand is made by placing two master units end to end and connected with a bridge platform. Lower photo shows how two Universal Stands with propeller wells open and bottom platforms put in transverse position form an ideal shape for motor maintenance.

Without the use of a single tool the stand is quickly folded into a "package" that measures only 1'5" x 2'10" x 7'0" with no loose parts . . . Slides easily under wings, takes up little hangar space and can be shipped without boxing in truck, train or transport.

What's the job—along the wing? Rudder and tail surfaces? Engine nacelles? You can quickly and comfortably service them all with the

UNIVERSAL *Repair Stand**

Note from the photographs how each master unit can be "opened up" to form a platform 8'6" long at any heights from 3'6" to 6'6". A flip of the hinged cover in center of stand provides an adequate propeler well. . . . arrangement of two or more Universal Stands permits an "H," "L," "T" or "Z" shape or a hollow rectangular platform—combinations that cover every phase of "high reach" aircraft maintenance.

While in use these light, versatile stands are held rigid and motionless by means of Bassick Truck Locks: The job over, a slight push sends them rolling to the next operation on sparkless plastic wheeled casters.

Until recently, W&M Universal Stands were "special jobs," but their success in both civil and military service has prompted us to establish quantity production. . . . Glad to send you further details and quote prices and delivery dates. Write or wire today.

* PATENT APPLIED FOR

THE WOLFE & MANN MFG. CO.
AIRCRAFT EQUIPMENT DIVISION
28th. & SISSON STS., BALTIMORE, MD.

Leading aircraft manufacturers keep coming back for **HECKER** engineered tools. Good reasons why.

First, our engineers know production problems by rubbing elbows with them right here in our own plant. They see many of their tools, jigs and fixtures on the job.

Second, **HECKER** is geared up to pinch-hit over emergencies and tight spots.

Third, consistently satisfactory experience with the tools we have designed and produced.

Whether your immediate problem is tool engineering or actual production of precision parts, **HECKER** service can help you. Our organization is old in experience, young in progressive ideas.

Give us a crack at one of your tough problems, just as a tryout of this service. That's your chance to know how we work; our chance to make a friend and continuing customer.

Write A. W. Hecker, 1978 East 66th Street, Cleveland, Ohio.

A·W· HECKER

DESIGNERS AND BUILDERS OF TOOLS, JIGS AND FIXTURES · · · FABRICATORS OF AIRCRAFT PARTS

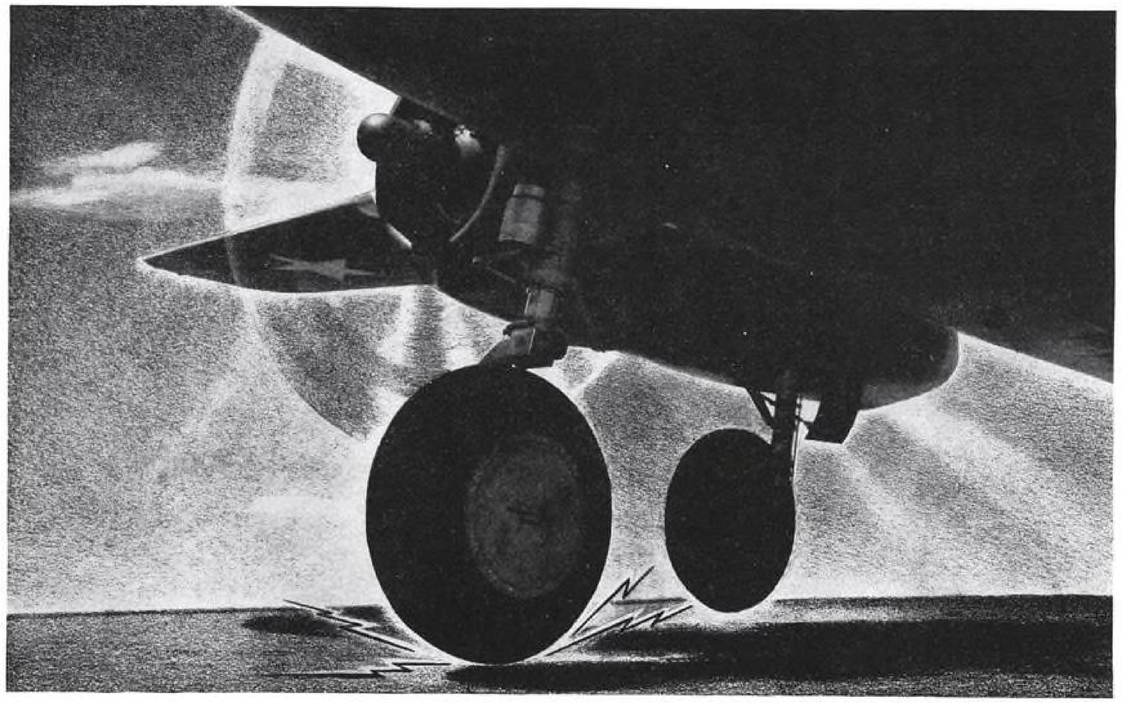

GROUNDING "CHAINED LIGHTNING"

PLANES couldn't fly without electricity but they could well do without the static they pick up in flight. For when they sit down on rubber tires, natural insulators, this chained lightning can't "ground"—*can* cause trouble.

In some cases static has piled up sufficient force to knock down the ground crew who touched the plane. Wires dragging—like the chains on gasoline trucks—have been tried but this wasn't too satisfactory.

Then they tried the new U.S. Royal "Static Ground" tire for tail and nose wheels. Result: no more static trouble.

The tread on this new Static Ground tire is made of special conductive rubber that releases the static charge as the tire makes contact with the ground. Inquire about this new U. S. Royal Static Ground tire. It's available in both nose wheel and tail wheel tires. If desired, it is available in U.S. Royal Smooth Contour landing wheel tires, too.

ROYAL AIRPLANE TIRES

ONLY "U. S." HAS THESE EXTRAS

1 **TEMPERED RUBBER TREAD**—A tougher, scuff- and heat-resistant tread compound for airplane tires.

2 **SAFETY BONDED RAYON CORD** — A lighter, more resilient, airplane tire material with tremendous impact resistance and stamina at high temperatures.

3 **FIELD AIRPLANE TIRE SERVICE**—A force of "U. S." field engineers in every part of the country is promptly available for engineering and technical help on tire and undercarriage problems.

4 **"U. S." ICE GRIP TREAD**—A tread of revolutionary design and performance for snow- and ice-covered landing surfaces.

5 **STATIC GROUND CONSTRUCTION** — Conductive rubber construction grounds static electrical charges upon contact with the ground. This safety feature is available in every U. S. Royal Smooth Contour and auxiliary wheel tire.

RAYON IN EVERY "U. S." TIRE — A "U. S." TIRE FOR EVERY PLANE

UNITED STATES RUBBER COMPANY

AIRPLANE TIRE DEPARTMENT • 6600 E. JEFFERSON AVE. • DETROIT, MICHIGAN

A PAGE FROM AVIATION'S HISTORY

Bombers aid "Commandos" in raid on Vaagso, Norway—Dropping delayed action bombs on Aerodrome at Herlda. ACME PHOTO

HOW TO MAKE A HIT ...with a Bomber!

Because split-second timing is so vital in bombing operations like this, Electric Aircraft Motors must give instantaneous, unfailing response when called into service. . . . Backed by the performance reliability of precision-built Emerson-Electric Motor Controls, a bomber crew can concentrate all of their attention on the job of hitting the objective, and getting away with it.

LIGHTWEIGHT, COMPACT, POWERFUL —Aircraft Motors are only one of Emerson-Electric's contributions to Winning the War.

THE EMERSON ELECTRIC MANUFACTURING COMPANY

St. Louis • *Branches:* New York • Detroit • Chicago Davenport • Los Angeles

EMERSON ELECTRIC

5 H.P. and Smaller ELECTRIC MOTORS FOR AIRCRAFT 5 H.P. and Smaller

OFFICIAL PHOTOGRAPH, U. S. ARMY AIR CORPS

Mallory Parts Help "Keep 'Em Flying"... 300 Miles an Hour Sitting Still!

When he pulls down the hood of this Link Instrument & Radio Pilot Trainer, the student flier at the controls acts just as if he were in actual flight over fog-bound or blacked-out terrain. He has to rely on a panel of flight instruments and on his radio earphones to guide him to his "objective"... at 300 miles an hour sitting still!

To keep Uncle Sam's airmen learning in Link Trainers, several Mallory precision products are used. Potentiometers to control the volume of simulated radio signals—themselves selected by Mallory Selector switches. Rheostats for cockpit lights; pilot light assemblies; and push button switches to control signal lights. Phone plugs and jacks for both instructor's and student's microphones and head phones. Electrical contacts to actuate the automatic keying device that produces various "keyed" signals, to keep the pilot on course.

All these Mallory products are vital to the performance of communications devices and navigating instruments... not only in the Link Trainers, but also in many actual warplanes now fighting our sky battles from the Arctic Circle to the South Pacific.

Yet electronic products are only a fraction of Mallory's share in the aircraft industry. Mallory Standardized Resistance Welding Electrodes speed the assembly of planes and aircraft parts... fabricated from stainless steel, aluminum alloys and other materials... by spot, seam and flash or butt welding. Mallory Electrical Contacts supply the "vital spark" for warplane devices, from bomb turrets to variable pitch propellers. Mallosil bearings, bushings and connecting-rod pins are specially silver-surfaced to carry today's heavier horsepower loads. Mallory Rectostarters speed testing of aircraft electrical equipment, starting of "green" engines and charging of airplane batteries.

If you're air-minded, you should be Mallory-minded, too. For Mallory radio, electronic and metallurgical engineers are solving plenty of problems *before* they leave the drafting-boards of aircraft manufacturers. You'll find us ready, willing and able to cooperate. Write us about your problem today!

P. R. MALLORY & CO., Inc., INDIANAPOLIS, INDIANA • *Cable Address*—PELMALLO

Trademarks Reg. U. S. Pat. Off.—Mallosil, Rectostarter, Vibrapack

P. R. MALLORY & CO. Inc.

MALLORY

SERVES THE AVIATION, THE AVIATION-INSTRUMENT AND THE AVIATION-COMMUNICATION FIELD WITH WELDING TIPS, ELECTRICAL CONTACTS, SPECIAL ALLOYS, MALLOSIL, VIBRATORS, VIBRAPACKS, CONDENSERS, ROTARY SWITCHES, SINGLE AND MULTIPLE PUSH BUTTON SWITCHES, COMMUNICATIONS HARDWARE, RECTOSTARTERS

with GAS TANKS sealed in a FIRE-KILLING ENVELOPE

HELL breaks loose when a tracer bullet meets gasoline fumes ... *but not on our warplanes!*

In fact, when a tracer whizzes through the gasoline tank of an American battle plane, it's as if it buried itself in a sandy hillside. For this there are two good reasons... One *inside* the tank, and one *outside*. We guard both of these vulnerable spots.

The emptied gasoline tank is the dangerous one. Fume-filled, it needs only a spark to explode it. So Walter Kidde & Company provides a "purging system." The pilot yanks a release, bleeds Kidde carbon dioxide gas into the tank. Explosive gasoline fumes are carried away—and replaced by inert carbon dioxide gas, deadly enemy to flame and fire.

There's not much danger of a *full* tank igniting. But suppose a self-sealing tank gets punctured, leaks a little, and fumes fill the area between the tank and the outer skin. Won't a tracer explode this mixture, collapse the tank or damage the wing? It can. But it doesn't get the chance. There's another Kidde cylinder that pours carbon dioxide gas into this space, ready to snuff out the tracer if it hits.

Kidde, master of fire in the air and on the ground... expert in handling of high-pressure gases... is seeking new research assignments. If you have one, let us know.

Kidde (K Kidde)

Walter Kidde & Company, Inc., 1222 West Street, Bloomfield, N. J.

HOW TO GET THE MOST OUT OF YOUR LATHES

No. 3 in a series of suggestions made by the South Bend Lathe Works in the interest of more efficient war production

Keep Your Lathes Level

The leveling of a lathe can either perpetuate or destroy the best craftsmanship of the machine tool builder. A lathe that is not kept perfectly level cannot turn out the precision work for which it was built.

The lathe bed is comparable to a toolmaker's surface plate. Upon it rest the headstock, carriage and tailstock. Therefore, any twisting of the lathe bed will throw the headstock, tailstock and carriage out of alignment. This will cause the lathe to turn or bore a taper instead of taking a straight cut. It will also cause the alignment of the tailstock center point to shift as the tailstock is moved along the lathe bed, necessitating constant readjustment of the tailstock top set-over.

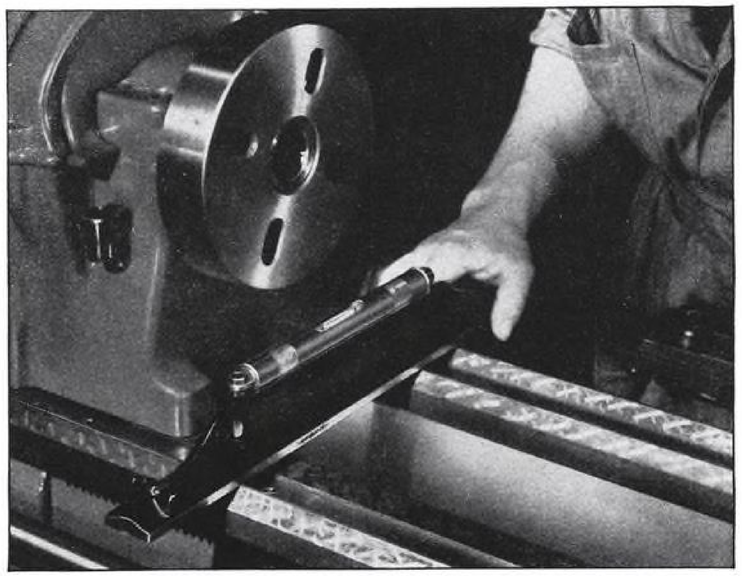

Every lathe should be checked periodically to see that it is level

Check Leveling Frequently

The major cause of distortion in lathe beds is the settling of the floor supporting the lathe. This is most commonly encountered in buildings that do not have solid foundations or that have wooden floors or columns. There are numerous other conditions which can cause this, such as the shifting of loads on the floor, swelling of wood flooring, deterioration of wooden shims, and atmospheric changes. For these reasons, every lathe should be checked periodically to see that it is level.

How to Level a Lathe

The first requisite for accurate leveling is a precision level at least 12″ long. One that is sufficiently sensitive to show a distinct movement of the bubble when a .003″ shim is placed under one end of it. A carpenter's level, a combination square level, or an ordinary machinist's level cannot be used because they are not sufficiently sensitive.

The leveling of the lathe is tested by placing the level squarely across the lathe bed, immediately in front of the headstock, and also at the extreme right end of the bed. On lathes having long beds, tests should also be made at one or more intermediate positions. Be sure that the ways are wiped perfectly clean of all chips or dirt before using the level.

Metal shims should be used under the lathe at the points indicated by the level as being low. Some lathes are equipped with leveling screws making it unnecessary to use shims.

After all adjustments have been made, bolt the lathe securely to the floor and repeat the tests to make sure that tightening the leg bolts has not affected the leveling of the lathe.

Alignment Test

A simple alignment test can be used to check the leveling of a lathe. Place a bar of steel, one inch or larger in diameter, in the chuck and machine two collars of equal diameter three or four inches apart. Then, take a very light finishing cut across both collars without changing the setting of the cutter bit. Measure both collars with a micrometer. If the collars are not the same diameter, it is an indication that the lathe is not level. Adjust the leveling until, when a cut is taken, both collars are turned the same diameter.

Write for Bulletin H3

Bulletin H3 giving more detailed information on the installation and leveling of lathes will be supplied on request. Also reprints of this and other* advertisements and bulletins in this series. State quantity.

*Ad. No. 1, "Keep Your Lathe Clean"
Bulletin H1, "Keep Your Lathe Clean"

Ad. No. 2, "Oiling the Lathe"
Bulletin H2, "Oiling the Lathe"

SOUTH BEND LATHE WORKS

South Bend, Ind., U. S. A. — **Lathe Builders for 36 Years**

The Electroforged Process

PUTS LONG LIFE and ACCURACY in * AEROCRAFT RIVET SETS

Copies of this complete catalogue, which fully describes the wide range of Aerocraft tools, are available to industry personnel when requested on company letterheads.

The exclusive Electroforged process assures better grain structure, uniform heating and accuracy that is responsible for the long life characteristic of Aerocraft Rivet Sets. This process is typical of the many *advanced* production methods used in making the Rivet Sets, as well as all Aerocraft production and maintenance tools.

*Genuine Aerocraft Tools manufactured only by Aircraft Tools Inc.

Aircraft TOOLS, INC.
LOS ANGELES • CALIFORNIA

★ FOREIGN REPRESENTATIVES • The A. R. Williams Machine Co., Ltd., Toronto, Hamilton and Vancouver, Canada ★ The Canadian Fairbanks-Morse Co., Montreal, Canada ★ Reginald M. Levy, Melbourne, Australia ★ Morris Black & Matheson, Ltd., Aukland, New Zealand ★ Emilio Staub & Cia. Ltd., Sao Paulo and Rio de Janeiro, Brazil, S. A. ★ W. A. Ramsay, Ltd., Honolulu, T. H.

His mind is free to concentrate on the *bigger* things of war because he knows the "little" things that sometimes mean so much have been taken care of. Little things like parachute fittings, for example. More than a dozen leading manufacturers are using Airchox-Joyce Parachute Hardware for greater safety and reliability.

Companies served by Joyce: American Lady Corset Co., Atlantic Rayon Corp., R. H. Buhrke Co., S. J. Campbell Co., Cheney Brothers, Cole of California, Inc., Crawford Manufacturing Co. Inc., Eagle Parachute Corp., Fashion Frocks, Inc., Hayes Manufacturing Corp., Hightstown Rug Co., Irving Air Chute Co. Inc., J. G. Menihan Corp., The Mintz Co., National Automotive Fibres, Inc., Pioneer Parachute Co. Inc., Reliance Manufacturing Co., Standard Parachute Corp., United States Navy, Wm. E. Wright & Sons Co.

AIRCHOX COMPANY, Division of JOYCE *Aviation, INC.*
General Offices, 8 So. Michigan Ave., Chicago

PARACHUTE HARDWARE • COLLAPSIBLE WHEEL CHOCKS • EXACT AIRSPEED COMPUTER • MOORING ANCHOR KIT • TOW-TARGETS FOR AERIAL AND ANTI-AIRCRAFT GUNNERY • SHOULDER SAFETY BELTS • AIRCRAFT SPINNER AND PROPELLER BLADES

Do you machine aluminum?

Gulf Cut-Aid will help you get higher production speeds, better finishes and longer tool life!

IN plant after plant, Gulf Cut-Aid is demonstrating its superiority as a cutting fluid for aluminum. Here are typical results with this revolutionary new Gulf product:

1. *Operation*—turning aluminum castings, ⅛" cut
   Result, using
   Gulf Cut-Aid—20% increase in production, 75% better finish (est.), longer tool life
2. *Operation*—tapping a ¾" diameter hole in a ¼" thick instrument cover plate
   Problem—1 part in 20 rejected due to cracking
   Result, using
   Gulf Cut-Aid—over 500 cover plates tapped without a reject.

In addition to its function as the ideal cutting fluid for aluminum, Gulf Cut-Aid has another important function — it is an effective energizer for other cutting oils, regardless of type or viscosity. Blended in varying proportions depending upon the various requirements of the job, the use of Gulf Cut-Aid with other cutting oils results in improved finish or longer tool life, or both.

Call in a Gulf service engineer today and let him demonstrate — in your plant — how Gulf Cut-Aid and other Gulf quality cutting oils can help improve your machining practice. Gulf Oil Corporation, Gulf Refining Company, Gulf Building, Pittsburgh, Pennsylvania.

Undercutting the valve seat on an aluminum alloy cylinder head in the plant of a prominent aircraft engine manufacturer.

GULF INDUSTRIAL LUBRICATION

Gulf Oil Corporation · Gulf Refining Company A
3800 Gulf Building, Pittsburgh, Pa.
Please send me, without obligation, a copy of the new booklet, "Gulf Cutting Oils," which includes a 24-page Machining Guide.

Company.....
Name.....
Title.....
Address.....

NEW OPERATORS..

but the Same job being done Faster with the Same

Thor PORTABLE ELECTRIC DRILLS

NEW OPERATORS . . . men and *women* . . . filling in on today's trebled wartime shifts are doing the same fast production jobs as the veterans with Thor Portable Electric Drills.

Not one ounce of the *needed* power and stamina packed into the Thor portable drill is lost when it is turned over to a new operator . . . because the compact, lightweight Thor design makes the drill easy to handle.

Every one of Thor's U-14 series portable electric drills has power of tools twice their size! Ranging in weights from 2¾ pounds to 4⅜ pounds, and in lengths from 7⅛ inches to 10⅛ inches, they are available in all sizes, speeds and switch styles to do *every type* of fast drilling job.



THOR U14A
PORTABLE ELECTRIC DRILL
Smallest of the Thor U14 Series Portable Electric Drills is the U14A . . . weight 2¾ pounds, length 7⅛ inches, drilling capacity ¼ inch.

Send today for full particulars on these and other drills in the complete line of Thor Portable Electric Tools in the new No. 37A Catalog.

Thor *Portable Pneumatic and Electric Tools*

INDEPENDENT PNEUMATIC TOOL COMPANY

600 W. JACKSON BOULEVARD, CHICAGO, ILL.
Branches in Principal Cities

Knights in Armor

Over Europe, in Asia, in Africa, in the South Pacific and in the Aleutians, American Flying Fortresses are smashing the enemy at every turn. This long-range, high-altitude bomber is wearing something new—something that has given it remarkable *defensive* ability—even when fighter escort is lacking.

This great offensive airplane now wears a coat of mail in the true manner of the knights of old. Deadly defensive blows from the "belly bubble" and its companion upper turret protect this modern knight in reaching his objective, raining havoc on the enemy, and returning to base. Every angle of attack is covered by machine-gun fire from these precision power-controlled Sperry turrets and the Boeing "stinger" in the tail.

A product of Sperry laboratories, the development, design, scientific investigation and engineering of both the upper turret and the lower ball turret were accomplished a full year before Pearl Harbor. At the outset of hostilities other manufacturers, under license, were soon able to take over the production, and quantities of this vital equipment are now flowing from their assembly lines.

Sperry Gyroscope Company, Inc.

BROOKLYN • NEW YORK

Waste Warden Tells
HOW TO GET LONGER SERVICE
from your Welding and Cutting Apparatus

TORCHES

1. Blow out hose before attaching torch.
2. Be sure the torch seat is clean.
3. Be sure packing nut is tight.
4. Also—don't use torch as a hammer. A torch built to withstand such abuse would be too heavy to handle.

TIPS

1. Clean tips with proper size standard cleaning drills only. Be sure to use a drill one size smaller than the orifice about to be cleaned. Makeshift wire cleaners enlarge tip openings and upset flame balance.
2. Store all tips in racks to prevent damage. Tips battered at seating end waste gas.

REGULATORS

1. Keep regulator seat dust free. Before attaching regulator clean outlet by cracking cylinder; clean gland by a short blast from cylinder.
2. Release regulator adjusting screw when changing cylinders. This prevents high pressure shocks to regulator seat.
3. Always open cylinder valve slowly when installing regulator. Repeated sudden cracking of cylinder into regulator promotes leakage.

DON'T JUNK DAMAGED APPARATUS

Today regulators, torches and tips are hard to replace. Good maintenance practices will help you get longer service and better performance from your gas welding and cutting apparatus.

But if a torch, tip, or regulator is damaged—don't junk it. Instead send it to an Airco Apparatus Repair shop where factory-trained repairmen will make it work like new. This nationwide repair service is available through your nearest Airco office.

AIR REDUCTION

60 EAST 42nd STREET, NEW YORK, N. Y.

IN TEXAS: **MAGNOLIA-AIRCO GAS PRODUCTS COMPANY**

AIRCO WILSON

OXYGEN IS PRODUCTION — *Don't Waste it!*

He'll live!...to fight again

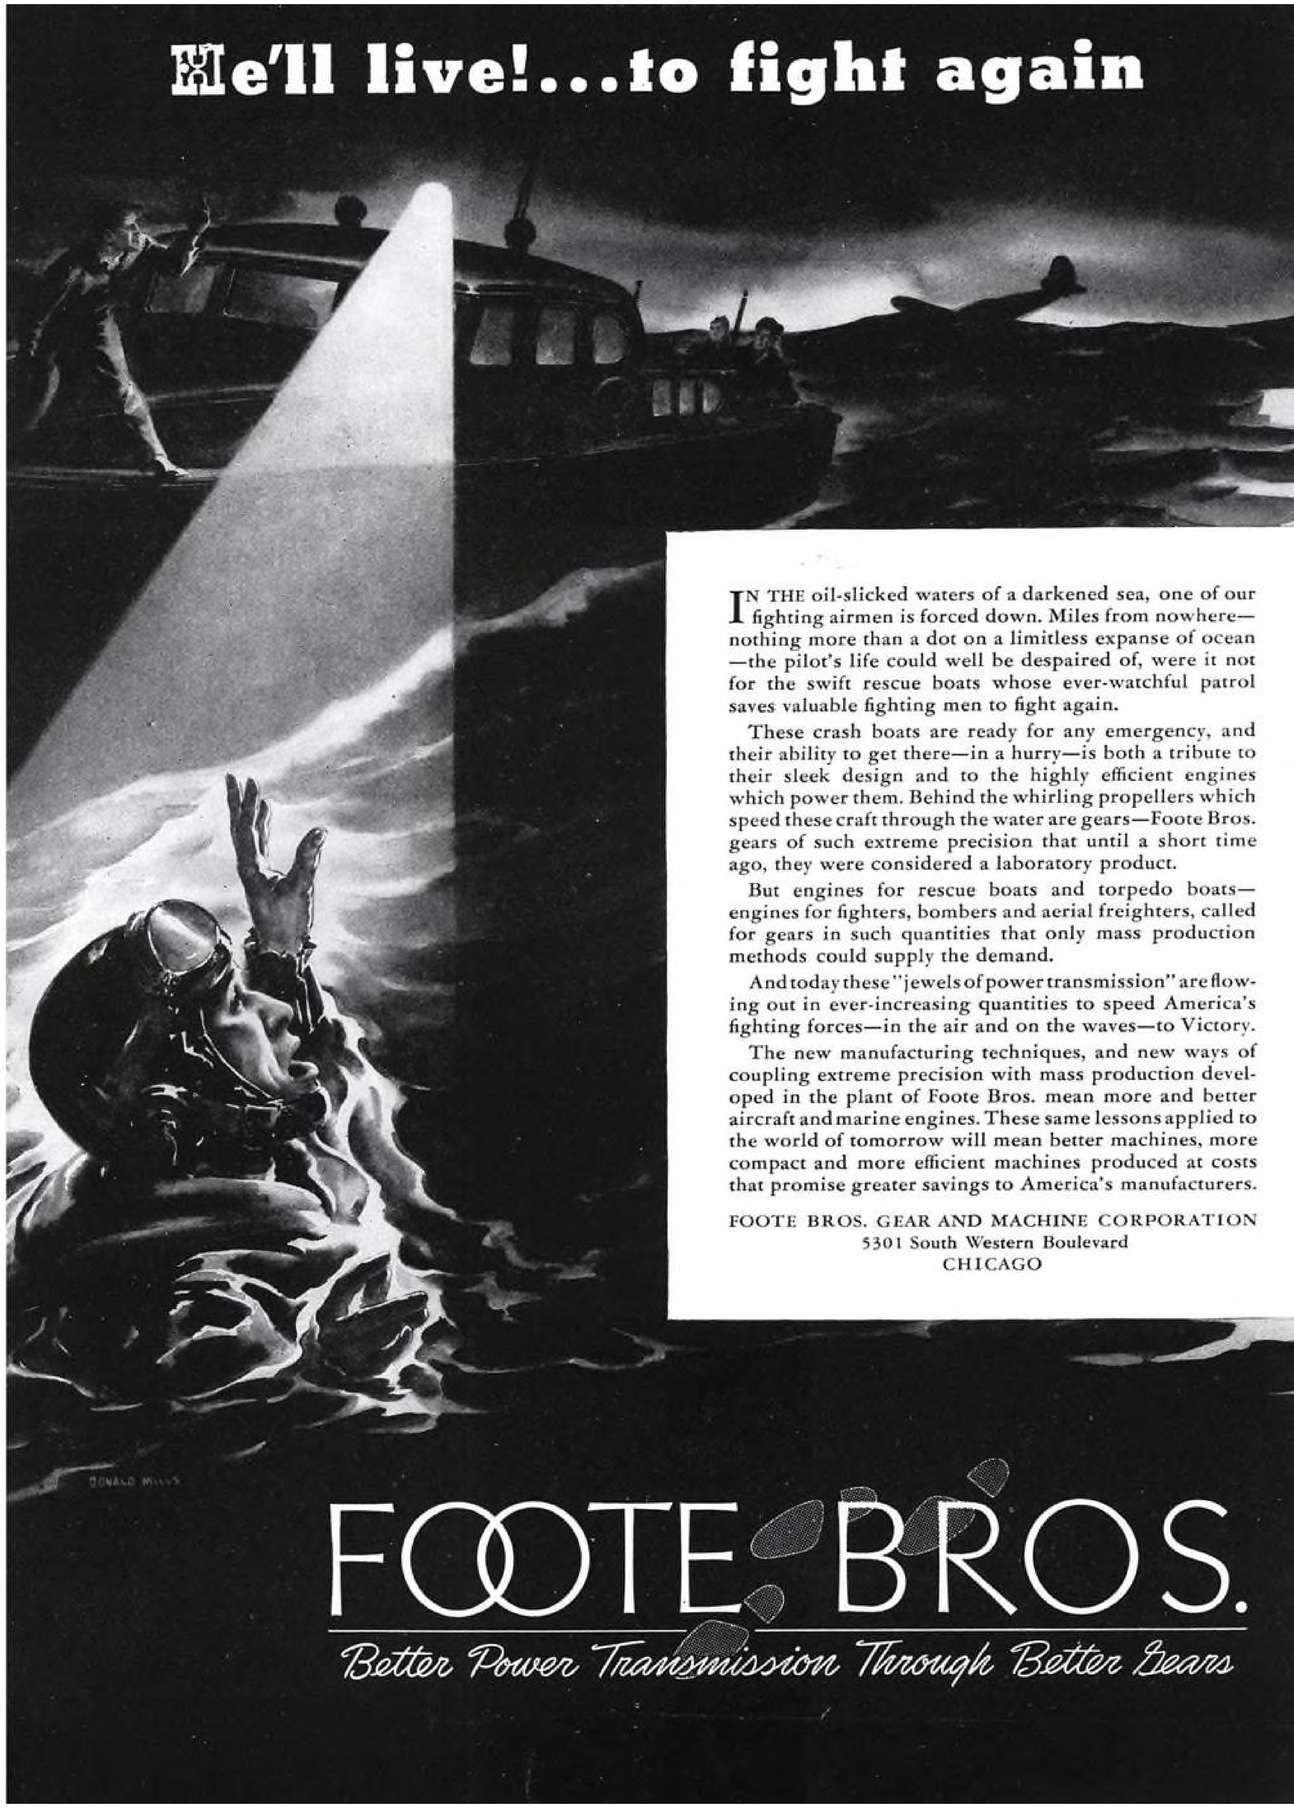

IN THE oil-slicked waters of a darkened sea, one of our fighting airmen is forced down. Miles from nowhere—nothing more than a dot on a limitless expanse of ocean—the pilot's life could well be despaired of, were it not for the swift rescue boats whose ever-watchful patrol saves valuable fighting men to fight again.

These crash boats are ready for any emergency, and their ability to get there—in a hurry—is both a tribute to their sleek design and to the highly efficient engines which power them. Behind the whirling propellers which speed these craft through the water are gears—Foote Bros. gears of such extreme precision that until a short time ago, they were considered a laboratory product.

But engines for rescue boats and torpedo boats—engines for fighters, bombers and aerial freighters, called for gears in such quantities that only mass production methods could supply the demand.

And today these "jewels of power transmission" are flowing out in ever-increasing quantities to speed America's fighting forces—in the air and on the waves—to Victory.

The new manufacturing techniques, and new ways of coupling extreme precision with mass production developed in the plant of Foote Bros. mean more and better aircraft and marine engines. These same lessons applied to the world of tomorrow will mean better machines, more compact and more efficient machines produced at costs that promise greater savings to America's manufacturers.

FOOTE BROS. GEAR AND MACHINE CORPORATION
5301 South Western Boulevard
CHICAGO

FOOTE BROS.

Better Power Transmission Through Better Gears

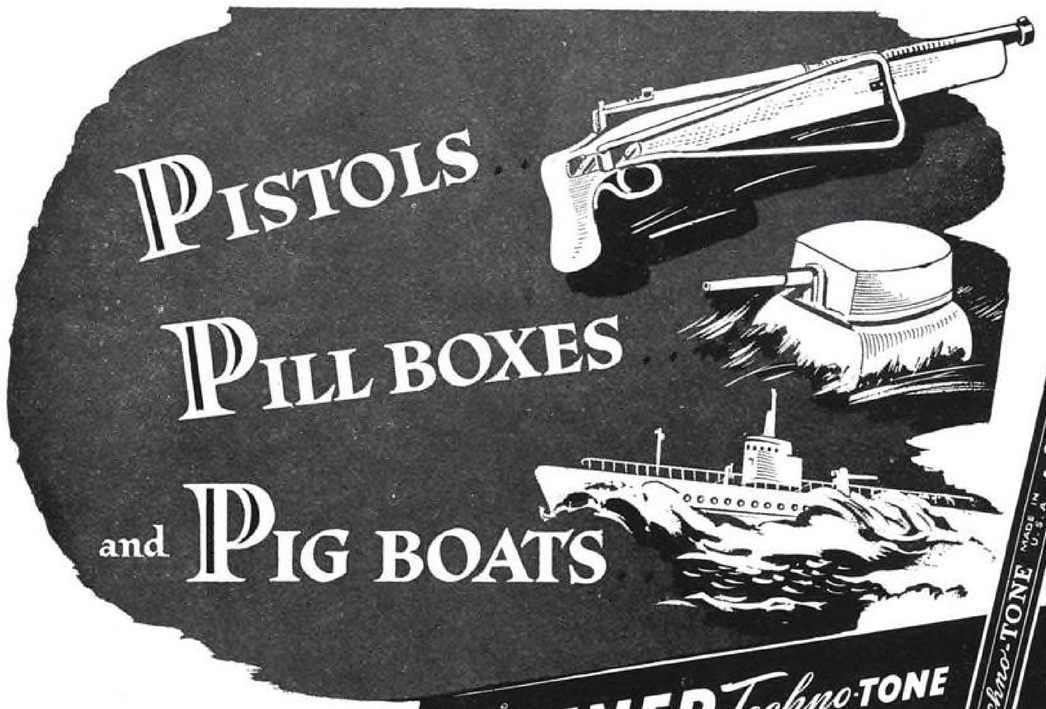

begin with **WINNER Techno-TONE DRAWING PENCILS**

First it was an idea—nebulous as air.

Next a rough pencil sketch.

Then a ton of drawings, renderings and blueprints.

Finally, a gleaming behemoth of steel slugging it out with the enemy.

Multiply this by infinity and you get an approximate idea of the pencil work that goes into Uncle Sam's War Production.

That WINNER Techno-TONE Drawing Pencil has been an indispensable factor in much of this work is an established fact. Established, too, is the preference of Craftsmen for this precision-milled pencil . . . for its grit-free smoothness, its flakeless, smudgeless rich black uniformity of tone. You are welcome to try a free sample. Just tell us the degree you prefer.

Write Dept. A-12, A. W. Faber, Inc., Newark, N. J.

★

Companion Pencil—WINNER Thin Colored Checking—Superb colors and strength. Choicest for all prints: 2381 Red; 2382 Blue; 2383 Green; 2385D Yellow; 2437D Orange. 10¢ each. $1.00 dozen. Would you like a sample?

★

WINNER Techno - TONE is available in 17 scientifically graded tones — 6B to 9H. Polished rich green. Packed in metal box. Made in U.S.A.

A·W· FABER Inc. NEWARK, N. J.

13c each 2 for 25c $1.25 dozen

AT ALL DRAWING AND ARTISTS MATERIAL DEALERS AND LEADING STATIONERS

ANY *Inexperienced* PERSON

Can Operate an Ozalid Whiteprint Machine

MISS ARCHER was hired yesterday . . . and she's already operating the Ozalid Whiteprint Machine at top efficiency . . . making whiteprints of engineering drawings, charts and letters in seconds.

This illustrates how Ozalid DRY DEVELOPMENT has revolutionized printmaking—transforming what was once a tedious job into a simple routine. You merely feed the original and the Ozalid sensitized material into the machine. Two quick steps—*Exposure and Dry Development* . . . and you have positive reproductions which are ready for immediate use in the shop or field.

Compare this simple process with blueprinting which demands the services of more than one trained operator to check water sprays, potash baths, temperature of drying drums, tension of rollers . . . in addition to other wasteful operations which throw print production off stride.

Follow the example of thousands of manufacturers who have been convinced of Ozalid's superiority. Install a compact Ozalid Whiteprint Machine in your drafting room. You'll be sure of a "head start" in war production . . . and savings in labor and materials.

Write for "Simplified Printmaking" which completely explains the Ozalid Process.

SIMPLIFIED PRINTMAKING is an illustrated booklet containing valuable "know how" information. It shows how to eliminate unnecessary drafting; make prints with blue, black, maroon or sepia lines on a white background; reduce trimming waste; make "new" originals for subsequent print production.

OZALID PRODUCTS DIVISION

GENERAL ANILINE & FILM CORPORATION

JOHNSON CITY, N. Y.

OZALID IN CANADA-HUGHES OWENS CO. LTD., MONTREAL

Electronics—Secret Weapon of War

Presager of a New Scientific and Industrial Era

THE END of World War I left scientists with a new plaything. They did not know it at the time but they had their hands on a revolution. Within two years the world had radio broadcasting. Within ten years the whole art of motion pictures had been transformed as talking pictures replaced silent movies. Within twenty years television was born and people were seeing pictures in motion by radio.

The fulcrum of this revolution is the electron tube, a new tool of illimitable possibilities. One form of the electron tube is the familiar radio tube; the much publicized electric eye is another. There are many other forms, each having distinct capacities for saving time, saving energy, saving money, protecting life, limb and property.

The electron tube puts the electron to work—and the electron is the basic building-block of the universe.

Electronics is the new art, the new science of putting the electron to work. Radio and sound pictures and television are aspects of electronics; but there are many other facets of this revolution which have been brewing since the last war.

The electron tube has a typical American family tree. Edison made the basic discovery of the "Edison effect" some sixty years ago. This was followed by the invention of the "Fleming valve" and the "de Forest grid". Then Armstrong contributed his share, and hundreds of engineers in garret and cellar workshops and in the great university and industrial laboratories went to work on the tubes which employ electrons. The tube was a plaything before the last war but the world conflict brought it out of the toy stage and made it a practical, powerful tool.

Today the electron tube is guiding the destinies of the greatest armies and fleets ever engaged in the history of the world.

It is a part of the nerve center of the battleship, directing its course, finding its adversaries, broadcasting running accounts of air battles to its crews, directing gun fire and determining ocean depth.

In the air it is the means of locating and identifying enemy planes, piloting planes automatically, giving communication from plane to plane and to shore. It is even operating the controls of the plane.

In the maneuvering tank, in the officer's car, on the back of a foot soldier it transmits and receives vocal messages from every unit of the fighting forces.

Along our borders, and those of our Allies is an electronic screen which counts, follows and identifies enemy planes a hundred miles away through darkness and through fog.

In industrial plants there are electronic counters that enumerate passing articles faster than the eye can see; automatic sorters which discard defective, oversize, undersize, off-color articles; automatic cutters; devices which inspect the inside of things which the eye cannot see; controls which protect workers; controls of temperature; smoke eliminators; intruder alarms; automatic controls for whole batteries of machines.

In its October progress report on American industry, the War Production Board points out that the radio business is *five* times greater than a year ago. From 20 million dollars a month last fall, it has increased to well over 100 million dollars a month. Unfilled war orders are in excess of 4 billion dollars.

From such vast growth will emerge a new engineering of products which will immeasurably improve our peace-time living.

After the war broadcasting will be infinitely more satisfactory: radio receivers will perform with a new fidelity which will amaze us. Television reception will be as flawless as the motion picture. Present secret war developments will readily be convertible to peace-time devices that will improve our standard of living.

No longer will ships collide with other ships, with icebergs or the shore. No longer will trains collide and aircraft crash in flight.

Garage doors will open as we approach and automatically close themselves. Electric lights will automatically go on and off according to our wants and needs. Furnaces and boilers will be controlled and smokestacks will cease to belch wasteful smoke. Air will be made dust free and germ free. Food contamination will be checked, meat made tender.

Grade crossings will be made safe and auto traffic will be automatically controlled.

Medical science sees new wonders ahead. Already it is possible to see "whiskers" on germs, germs which heretofore had been but a blur when viewed through the strongest optical equipment available.

Today so much secret development is going on in the ultra-high-frequency field that little can be said of its great future. But, without divulging military secrets, it can be said that ply-wood is being dried electronically in minutes instead of hours. Ultra-high-frequency welding (not to be confused with flame welding controlled electronically) is being done dramatically and efficiently.

Ultra-high-frequency heating promises to revolutionize the baking industry—it may even heat our homes.

What is this miracle working tube that can see, hear, taste, feel and smell a thousand times more sensitively than was possible heretofore?

What is the electron? No one knows, not even the scientists who know how to employ it. Electrons cannot be seen or felt; but if 6¼ million million million electrons are pushed through a 100-watt electric lamp per second, it will light up to full brilliance. For electric current merely is a mass movement of electrons. Each electron carries its share of electricity, and since the electron has so little weight it can be moved easily and quickly. Therefore, electricity transported by electrons can be turned on or off with great ease and speed. The electron tube merely is a device that controls the flow of electricity. It is an amplifier of power which can be made to do wondrous things. The sound of a termite gnawing inside of a log can be amplified a million times . . . to a roar that can be heard over great distances.

Colors can be classified and matched to a degree not possible by any other means.

Chemical or vitamin consistency can be recognized by counting radio activity within the subject being analyzed.

There is no industry in which electronic circuits cannot be used to speed up production, to increase accuracy, to do heretofore impossible tasks of calibration and measuring.

The opportunities afforded the engineers who are developing this new "electronic age" are limitless.

* * * *

Today the electronic industry is 100% at war. It is meeting the exacting demands made upon it.

Never before was electronic equipment called upon to withstand temperatures ranging from 75 degrees below to 150 degrees above zero Fahrenheit. Never before did radios and transmitters have to withstand the shaking and abuse to which they are being subjected today.

War demands have called for much redesign, much change of materials and a new conception of operating to tolerances never dreamed of in peace-time material. As a result, electronic parts and equipment makers are building better devices.

Universities and colleges are working at top speed to produce electronic engineers, for every radio operator in a plane, every radio man in the ground forces and on ships, every man operating radar equipment or electronic control devices in ordnance . . . and there are many thousands of them . . . must be a trained technician.

The wall of military censorship is high but it is no secret that one of Britain's best weapons that keeps the Luftwaffe from exterminating London is a radio locator, a device that gives alarm of approaching planes long before they can be seen with telescopes. Scanning the horizon constantly the locator warns of the enemy's approach. In the nose of a night fighter, the locator informs pilot and gunner when the enemy is within range. Neither is it a military secret that gunfire can be controlled by electronics, and that electronics is having a big share in training our new armies.

Necessity draws a veil over the most dramatic uses of electronics in warfare, but among those who know there is nothing secret about the fact that many of today's wartime applications will revolutionize our peace-time lives. Electronics will invade every industry with totally new devices and machines. The future of the electronics industry is limited only by man's imagination.

Such is electronics, and its destiny!

James H. McGraw, Jr.

President, McGraw-Hill Publishing Company, Inc.

This is the sixth of a series of editorials appearing monthly in all McGraw-Hill publications, reaching more than one and one-half million readers, and in daily newspapers in New York, Chicago and Washington, D. C. They are dedicated to the purpose of telling the part that each industry is playing in the war effort and of informing the public on the magnificent war-production accomplishments of America's industries.

EDITORIAL

The War Is Not Yet Won

THE CIVILIZED WORLD has been electrified by the brilliant beginning of the North African campaign, which has thrown the enemy into confusion and restored the long submerged self-confidence of our French Allies. Our strategists have demonstrated that they have learned well the complicated technique of blitzkrieg and our tacticians have added something new to its execution—the ability to make an occupation stick by careful diplomatic preparation and by making friends of the occupied populations.

The success of these operations are due to a large number of factors, among which are adequate land, sea and air forces deployed under conditions favored by timing, surprise, and diplomacy. But it must be remembered that the effective strength of our invading forces depended directly on the degree to which they were opposed. And whether we were to meet stiff or indifferent opposition depended largely on the diplomatic preparation for the attack.

Our experience so far in North Africa adds to the rapidly accumulating evidence supporting our appreciation of the realistic place of air power in the warfare of today. Like all other war machines, the airplane has its limitations, and, if we are to use it effectively, we must use it within the framework of these limitations. Air superiority still remains the essential ingredient of victory. Without it, defeat is inevitable. But it must be coordinated with all of the other ingredients if we are to have effective striking power.

AIR POWER consists of three fundamental elements—planes, men and bases. All three must be at the right place at the right time. The planes must be suited to the particular job in hand. Even more important than the plane is the man who flies it. It takes 20 years to "grow" a pilot. Some of our factories can build an airplane in not much more than 20 minutes. But there is nothing more futile than a pilot and airplane without gasoline or without a place from which to take off. Whether the base is the deck of a carrier, or the end of a convoy route to a jungle air field, it is absolutely necessary to air power.

This is *not* the time to shout loudly about victory. It is the time for hope but not over-optimism. There is much more to be done.

To quote the gifted phraseology of the British Prime Minister, it is only the "end of the beginning." Our forces are still a long way from Berlin and we must not underestimate the strength or craftiness of the enemy whom we are only now meeting.

Much depends upon the facility with which we are able to complete the occupation of that small but highly important remaining section of the North African coast which lies between our forces and complete control of the Mediterranean. When this is done and when the elimination of the Nazi Afrika Korps has been completed and our gains consolidated, we will be in a highly advantageous position. Hitler-controlled Europe will be almost entirely surrounded.

THE NEXT STEP will be the one in which air power will play the most important part. Whether or not it will be possible to force a decision by continuous and simultaneous air attack from our circularly disposed bases remains to be seen. But no matter how intensive this air action may be, it is probable that it will have to be accompanied by naval action and followed by land-occupation.

All of our present advantages may be rendered ineffective if the enemy is successful in interfering to any extent with our long lines of communication and that is probably what will be attempted. And our efforts will always be hampered while we have other important work to do in the Western Pacific.

Our still small offensive effort has gotten off to an excellent start. The outlines of our strategy are sound, and the tactical execution so far has been excellent. Now more than ever we of the home front must cast aside differences of opinion and petty jealousies and bend every effort to give our advancing armed forces all the support that they need.

Leslie E. Neville

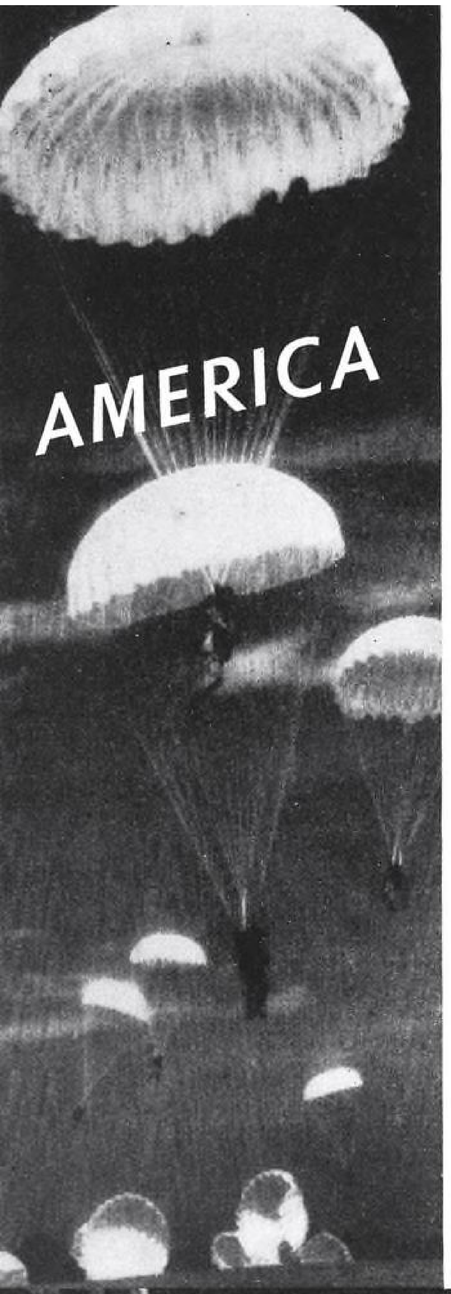

AT WAR

Second front opening gives several clues to the part American aircraft may be playing in future battles, not only in Africa but on the continent.

A SECOND FRONT has been opened; opened with perhaps as beautiful a bit of coordination as has ever been seen in military history.

The occupation of North Africa was more than coordination in time—getting all the units ashore on schedule under air protection—for it marked the perfect blending of all the elements of modern war: men, material and diplomacy.

That last element overshadowed even the part played by air power. In fact, pre-occupation diplomacy reduced to a minimum the need for fighter and bomber aircraft and at the same time provided adequate bases for the hard fighting which lies ahead. All fighting men—air, land and sea—owe a tremendous debt to one of the greatest international poker players, Secretary of State Cordell Hull.

Several clues to air power's coming role were revealed by the occupation, however. One straw in the wind was the obvious and the expected. Four-engine bombers participated under the direction of Brig. Gen. James Doolittle, who took over as co-pilot of one of them when the regular co-pilot was wounded in a brush with French fighter planes. American attack planes, perhaps including some medium altitude fighters, were on the job, as is shown by reports of airport and ground troop strafing.

More significant, though, was the fact that land-based American fighter planes were flown into action from England, a distance of at least 1,400 mi. That fact alone can easily mean that Hermann Goering will, more and more, be figuratively running rapidly in several directions at once, getting no place fast. And no less important is the fact that paratroopers "hit the silk" after having been flown direct from bases in England.

This is heartening when we remember that Germany alone started the war with the only air force in the world capable of modern fighting. All the other belligerents had nucleus forces, but Germany alone seemed to have a clear concept of aviation reality. The rest had to learn and build at the same time. Whether the British were smart or lucky in having the basic design of a fighter, the *Spitfire*, which would take the lead in saving their country from invasion, and possibly the world from a period of Nazi domination, provides plenty of fire-side argument material.

But the world learned quickly from the Nazis. Russia, America, England, Japan—all have fighting aviation as good as Germany's. Therein lies a lesson warlike people should learn—but won't. The lesson is that if they aim a blitzkreig at their neighbor, they should make sure to knock him cold, otherwise he will get up and blitz back. Aviation builds fast, and its technique is as fluid as the wind.

Since our last report on the globe-girdling battle of aircraft, the United Nations have obtained unquestioned air superiority on all fronts. That means Africa, Russia, the Southwest Pacific, and the English Channel. It is the realization of objectives which have been discussed here before. Months ago, the United States alone passed the entire Axis in the production of airplanes. That, plus the output of the British commonwealth, certainly seemed as if it should soon overwhelm the enemy. But, as was pointed out, the enemy was fighting from inside his stockade, so to speak, with all his factories and his military camps and his homes compact on his own soil. The Allies were scouting, stabbing and running around the edges, so it took a lot of airplanes to make a few in many different places.

But a woodpecker can fill any knothole with nuts if you give him time. The Russian and the Chinese Armies, and the American and British Navies have provided that time. Our flow of planes has filled up those many spots, and we are now coming out in force and hitting the enemy. He is hitting back, but the labored production of Japan and Germany can be no match in the long pull for the strength of the Allies with three-fourths of the world's man-hours and resources.

We are told on good authority that chances are the Axis will never again have control of the air for very long, over any considerable area, in this war. Hanson Baldwin, of the *New York Times*, one of the "typewriter strategists" who takes his machine right out on the line, says that our Navy has not yet learned how to coordinate its surface attack and its airplane attack. We have had some bad defeats in the Pacific lately, and one might assume Mr. Baldwin has told one of the reasons. If so, the enemy there may be said to have air superiority over us at times.

At home, in the production of airplanes, the country has had a temporary setback. Everyone is impressed with the work the aircraft manufacturers are doing—with their rapid development of mass production shortcuts; with their ingenious subassembly schemes; with their quick adaptation to materials substitutes; their flexible sideshows for handling design changes while the production line rolls right along. Mr. Roosevelt gave the impression that he marveled at the aircraft factories. In only two or three cases, since the war drive started, has the airplane industry been found at fault. Its enthusiasm, its sacrifice of its own competitive interests, all have won admiration.

But the job of taking inventory of the materials, particularly metals, and apportioning them to the various categories of war equipment appeared to be too much. Those who have tried to take over the little woman's job at breakfast time and get the coffee and the toast and the scrambled eggs all ready at the same time know the problem. The War Production Board's eggs were cold before the coffee boiled, and the toast burned up.

So, for four months, the output of airplanes has been running along on a nearly level basis. Recently it fell off. Production was better than it looked, however, because the ratio of smaller planes declined in relation to heavy bombers, which don't count up so fast. Actually, the tonnage and the dollar value of the planes did increase somewhat, but not enough.

The country is not meeting its plane schedule, but that is only part of the story. The military men have decided that the airplane program should undergo some changes. They want more armor, more and bigger guns, more ammunition, longer range, more power. The job is just as much harder as if they called for thousands of more airplanes.

The War Production Board is allocating the aluminum and the copper and the steel and the manpower to do the job. The Army and Navy will get what they want, but no exciting stories about vast numbers of planes can be expected for a while. That number yardstick for measuring air power is going out. That can be seen from reports of Boeing B-17's and Consolidated B-24's going out to fight off swarms of enemy planes, drop their bombs accurately and effectively, and get back

(*Turn to page* 323)

American paratroopers get their final training in England just before the African occupation in which they participated with remarkable success. They had been hard at work in England some time before their presence was announced. A good indication of what lies in store for the Axis is given in the fact that United States paratroopers were flown in American planes direct from England to the North African occupation points.

Press Association, Inc.

Prominent in the news from the European theater of air war recently has been the new de Havilland "Mosquito" high-speed reconnaissance bomber which first made headlines in the raid on Gestapo headquarters in Oslo, Norway, a round trip of approximately 1,000 mi. Of all-wood construction, the "Mosquito" has a span of 54 ft. 2 in., over-all length of 40 ft. 9½ in., and height of 15 ft. 3 in., and is reported to mount four 20-mm. cannon and four 0.303 machine guns. Top speed has not been revealed, but the two Rolls-Royce engines spinning de Havilland three-blade hydromatic propellers are said to give the planes speed which has enabled them to outrun Focke-Wulf 190's at low altitudes.

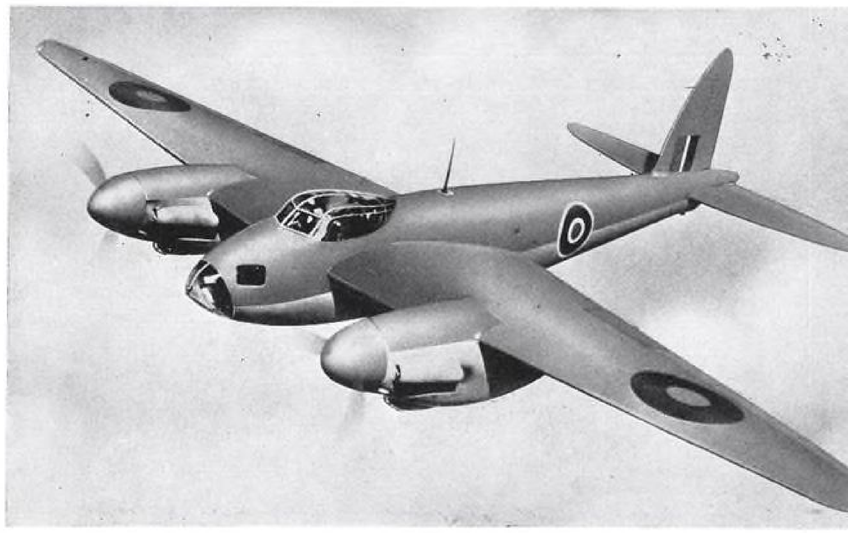

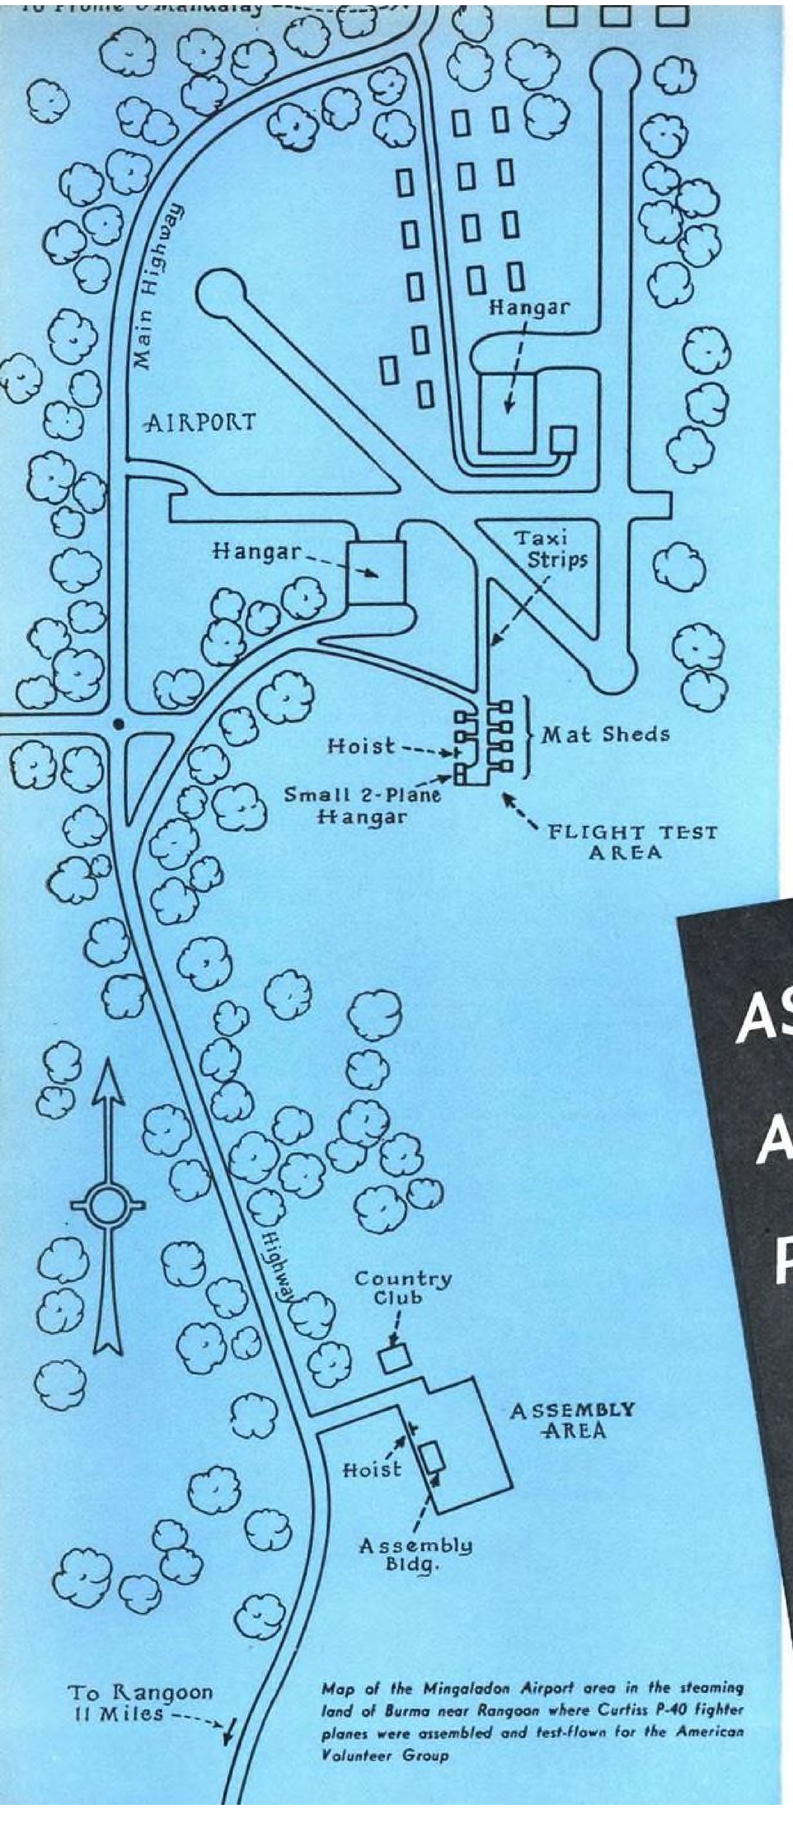

Map of the Mingaladon Airport area in the steaming land of Burma near Rangoon where Curtiss P-40 fighter planes were assembled and test-flown for the American Volunteer Group

Assembling and testing fighter planes for action thousands of miles from the factory under staggering climatic conditions and with native labor and equipment is a job that calls for ingenuity and imagination. The remarkable performance of the AVG against the Japs in Burma was fully matched by men who assembled the planes for the Group to fly.

ASSEMBLING And TESTING P-40's In BURMA

By BYRON A. GLOVER
Test Pilot, Curtiss-Wright Corporation

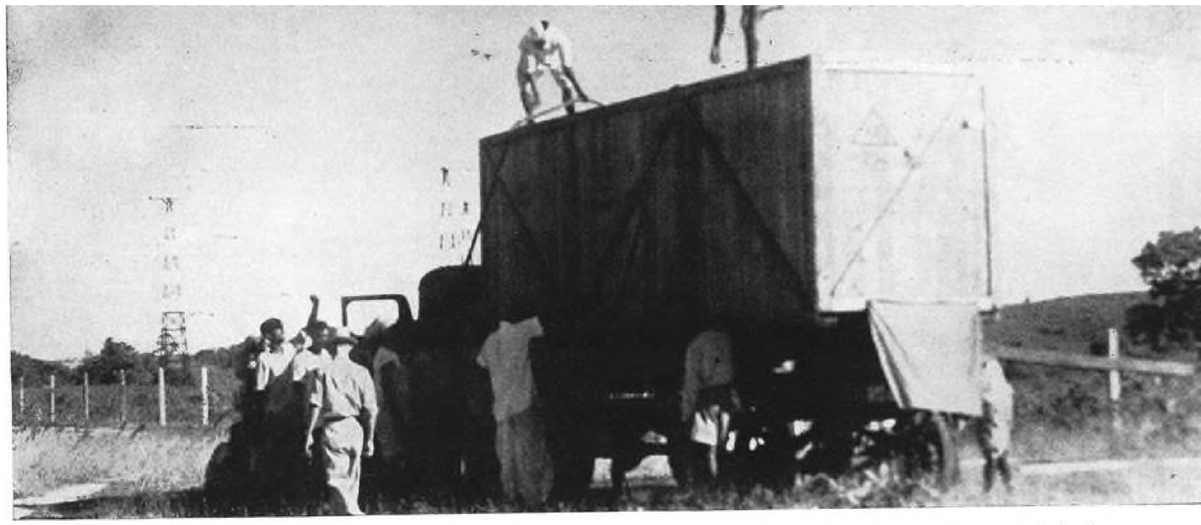

FIG. 1. Native Burmese laborers preparing to unload a fuselage crate from one of the two trailers especially built to haul the plane sections from the dock to the assembly area.

IN APRIL, 1941, I was engaged as test pilot by an American company which had contracted to assemble, flight test, and deliver to the Chinese government 100 Curtiss P-40 (*Tomahawk*) fighter planes. These planes were later used by the American Volunteer Group to defend the Burma Road, and assembly and delivery was performed in Rangoon, Burma.

I left Los Angeles in May for Hong Kong by Pan American Clipper. Connections were made after a four-day layover with China National Airways. The flight from Hong Kong to Chungking was made without event although the first part of the trip was made over territory held and patrolled by the Japanese, and takeoffs were made only at night or in "unflyable" weather.

The Chungking airport is unique. It consists of a long, narrow landing strip in the center of an island in the Yangtze River. For certain periods of the year it is under water when the river is at flood tide, and for this reason the runway is paved with huge stone slabs about 3 ft. by 4 ft. in size and about 1 ft. thick. On the way from Chungking to Lashio, Burma, I noticed several twin-engine Beechcraft used for training pilots by the Chinese government at the Kunming airport.

The last leg of the flight was from Lashio to Rangoon. After flying in cool air at 13,000 ft., the tropical heat of 110 to 115 deg. in Rangoon was staggering. I was told that considerable relief from the heat would be afforded when "the rains came"—and this proved to be so. The thermometer dropped way down to 95 deg. and remained there until the end of the rainy season in October.

Our Rangoon office was managed at this time by Mr. Dan F. Gourlie.

FIG. 2. A group of Chinese supervisors in charge of assembly operations. These men did a superhuman job and directed operations with unusual skill and intelligence.

His staff consisted of about a dozen people whose homes were in Rangoon. From Mr. Gourlie I learned that the company had already secured a small piece of land near the Rangoon airport and had let a contract for the construction of a small assembly building. The contract had been given to Clark & Gregg, a local contractor. It had originally been planned to use the roof trusses of the assembly building for hoisting the fuselages of the airplanes during assembly. Upon checking over the plans for the design of the assembly building I discovered that the roof trusses as originally planned were not strong enough to carry the weight of the P-40 fuselage. Mr. Gourlie and I then had a conference with the contractor, who upon learning of our requirements agreed to replace two of the wooden truss members of the roof under each end of the building with two steel truss members that would be capable of carrying a load of over 3 tons each. Construction of the side walls of the assembly building had just been started at this time and it was estimated that it would require approximately two months before the building would be completed.

Since the P-40's were expected to arrive before the building would be completed it was decided at this time to

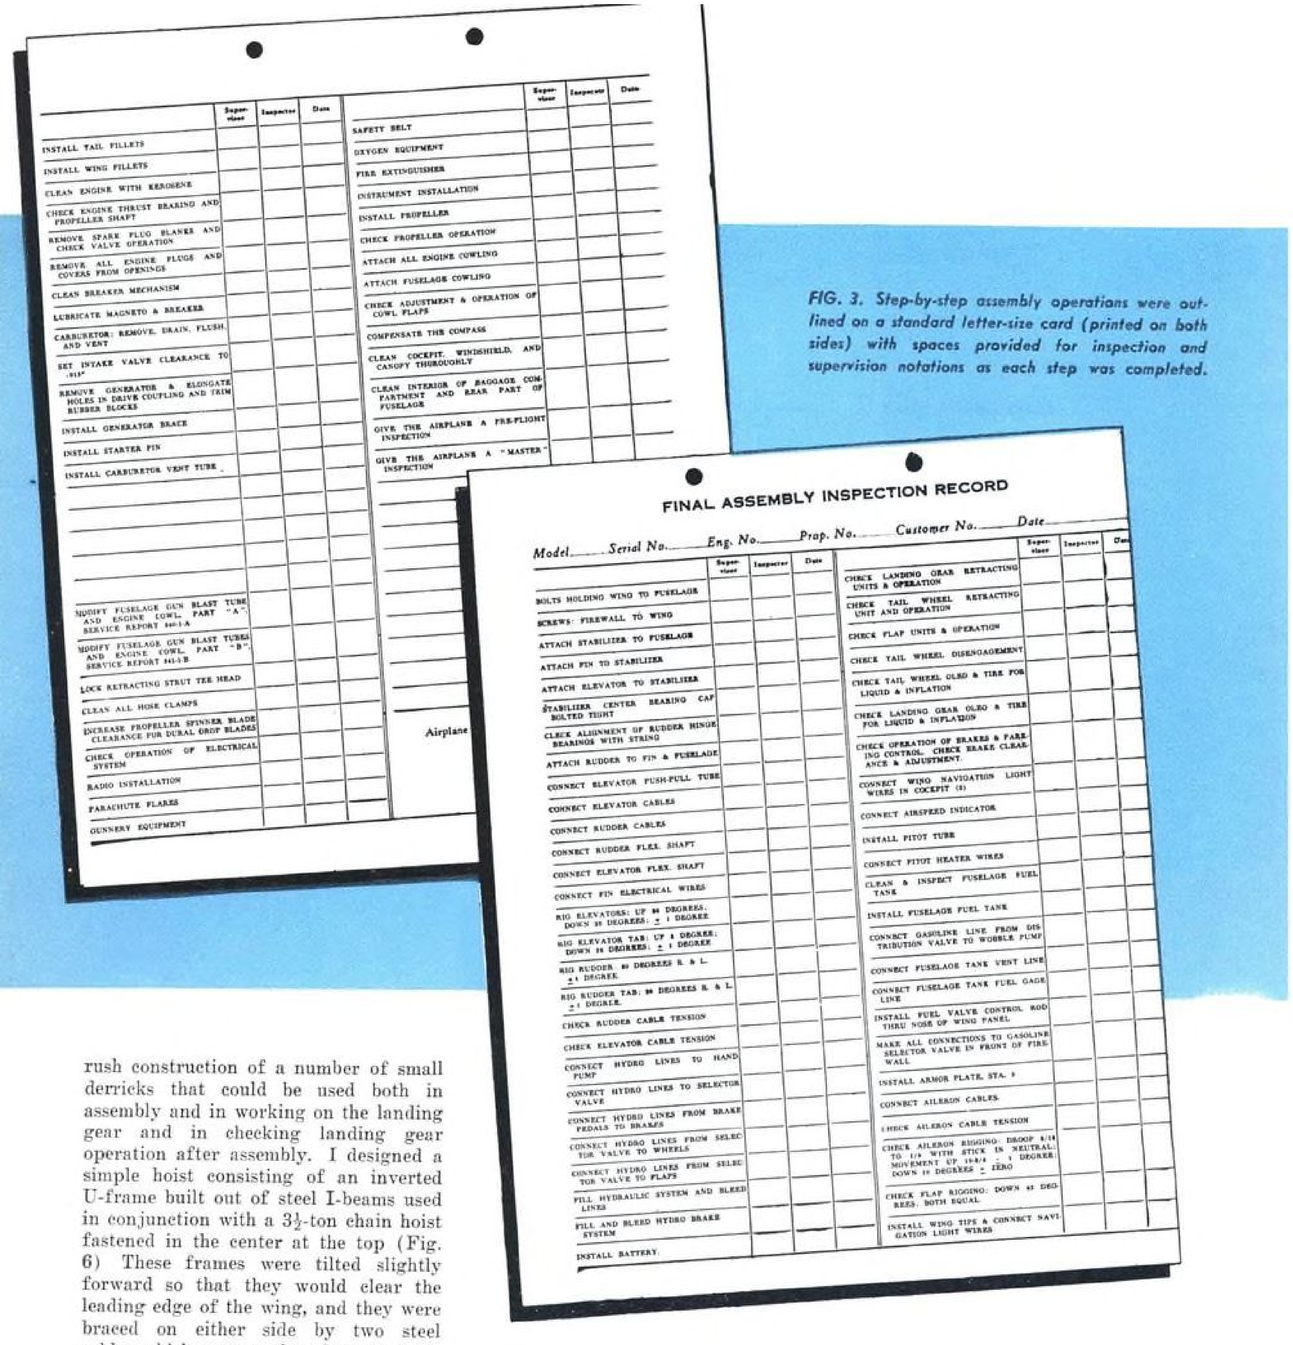

	Supervisor	Inspector	Date
INSTALL TAIL FILLETS			
INSTALL WING FILLETS			
CLEAN ENGINE WITH KEROSENE			
CHECK ENGINE THRUST BEARING AND PROPELLER SHAFT			
REMOVE SPARK PLUG BLANKS AND CHECK VALVE OPERATION			
REMOVE ALL ENGINE PLUGS AND COVERS FROM OPENINGS			
CLEAN BREAKER MECHANISM			
LUBRICATE MAGNETO & BREAKER			
CARBURETOR: REMOVE, DRAIN, FLUSH AND VENT			
SET INTAKE VALVE CLEARANCE TO -015"			
REMOVE GENERATOR & ELONGATE HOLES IN DRIVE COUPLING AND TRIM RUBBER BLOCKS			
INSTALL GENERATOR BRACE			
INSTALL STARTER PIN			
INSTALL CARBURETOR VENT TUBE			
MODIFY FUSELAGE GUN BLAST TUBE AND ENGINE COWL, PART "A", SERVICE REPORT #40-1-A			
MODIFY FUSELAGE GUN BLAST TUBES AND ENGINE COWL, PART "B", SERVICE REPORT #41-4-B			
LOCK RETRACTING STRUT TEE HEAD			
CLEAN ALL HOSE CLAMPS			
INCREASE PROPELLER SPINNER BLADE CLEARANCE FOR DURAL CROP BLADES			
CHECK OPERATION OF ELECTRICAL SYSTEM			
RADIO INSTALLATION			
PARACHUTE FLARES			
GUNNERY EQUIPMENT			

	Supervisor	Inspector	Date
SAFETY BELT			
OXYGEN EQUIPMENT			
FIRE EXTINGUISHER			
INSTRUMENT INSTALLATION			
INSTALL PROPELLER			
CHECK PROPELLER OPERATION			
ATTACH ALL ENGINE COWLING			
ATTACH FUSELAGE COWLING			
CHECK ADJUSTMENT & OPERATION OF COWL FLAPS			
COMPENSATE THE COMPASS			
CLEAN COCKPIT, WINDSHIELD, AND CANOPY THUROUGHLY			
CLEAN INTERIOR OF BAGGAGE COMPARTMENT AND REAR PART OF FUSELAGE			
GIVE THE AIRPLANE A PRE-FLIGHT INSPECTION			
GIVE THE AIRPLANE A "MASTER" INSPECTION			

Airplane

FINAL ASSEMBLY INSPECTION RECORD

Model____ Serial No.____ Eng. No.____ Prop. No.____ Customer No.____ Date____

	Supervisor	Inspector	Date
BOLTS HOLDING WING TO FUSELAGE			
SCREWS: FIREWALL TO WING			
ATTACH STABILIZER TO FUSELAGE			
ATTACH PIN TO STABILIZER			
ATTACH ELEVATOR TO STABILIZER			
STABILIZER CENTER BEARING CAP BOLTED TIGHT			
CHECK ALIGNMENT OF RUDDER HINGE BEARINGS WITH STRING			
ATTACH RUDDER TO FIN & FUSELAGE			
CONNECT ELEVATOR PUSH-PULL TUBE			
CONNECT ELEVATOR CABLES			
CONNECT RUDDER CABLES			
CONNECT RUDDER FLEX. SHAFT			
CONNECT ELEVATOR FLEX. SHAFT			
CONNECT FIN ELECTRICAL WIRES			
RIG ELEVATORS: UP 24 DEGREES, DOWN 28 DEGREES: ± 1 DEGREE			
RIG ELEVATOR TAB: UP 8 DEGREES; DOWN 28 DEGREES: ± 1 DEGREE			
RIG RUDDER: 30 DEGREES R. & L. ±1 DEGREE			
RIG RUDDER TAB: 24 DEGREES R. & L. ±1 DEGREE.			
CHECK RUDDER CABLE TENSION			
CHECK ELEVATOR CABLE TENSION			
CONNECT HYDRO LINES TO HAND PUMP			
CONNECT HYDRO LINES TO SELECTOR VALVE			
CONNECT HYDRO LINES FROM BRAKE PEDALS TO BRAKES			
CONNECT HYDRO LINES FROM SELECTOR VALVE TO WHEELS			
CONNECT HYDRO LINES FROM SELECTOR VALVE TO FLAPS			
FILL HYDRAULIC SYSTEM AND BLEED LINES			
FILL AND BLEED HYDRO BRAKE SYSTEM			
INSTALL BATTERY			

	Supervisor	Inspector	Date
CHECK LANDING GEAR RETRACTING UNITS & OPERATION			
CHECK TAIL WHEEL RETRACTING UNIT AND OPERATION			
CHECK FLAP UNITS & OPERATION			
CHECK TAIL WHEEL DISENGAGEMENT			
CHECK TAIL WHEEL OLEO & TIRE FOR LIQUID & INFLATION			
CHECK LANDING GEAR OLEO & TIRE FOR LIQUID & INFLATION			
CHECK OPERATION OF BRAKES & PARKING CONTROL. CHECK BRAKE CLEARANCE & ADJUSTMENT.			
CONNECT WING NAVIGATION LIGHT WIRES IN COCKPIT (2)			
CONNECT AIRSPEED INDICATOR			
INSTALL PITOT TUBE			
CONNECT PITOT HEATER WIRES			
CLEAN & INSPECT FUSELAGE FUEL TANK			
INSTALL FUSELAGE FUEL TANK			
CONNECT GASOLINE LINE FROM DISTRIBUTION VALVE TO WOBBLE PUMP			
CONNECT FUSELAGE TANK VENT LINE			
CONNECT FUSELAGE TANK FUEL GAGE LINE			
INSTALL FUEL VALVE CONTROL ROD THRU NOSE OF WING PANEL			
MAKE ALL CONNECTIONS TO GASOLINE SELECTOR VALVE IN FRONT OF FIREWALL			
INSTALL ARMOR PLATE, STA. 8			
CONNECT AILERON CABLES			
CHECK AILERON CABLE TENSION			
CHECK AILERON RIGGING: DROOP 5/16 TO 1/4 WITH STICK IN NEUTRAL; MOVEMENT UP 15-3/4 ± 1 DEGREE, DOWN 10 DEGREES ± ZERO			
CHECK FLAP RIGGING: DOWN 45 DEGREES; BOTH EQUAL			
INSTALL WING TIPS & CONNECT NAVIGATION LIGHT WIRES			

FIG. 3. Step-by-step assembly operations were outlined on a standard letter-size card (printed on both sides) with spaces provided for inspection and supervision notations as each step was completed.

rush construction of a number of small derricks that could be used both in assembly and in working on the landing gear and in checking landing gear operation after assembly. I designed a simple hoist consisting of an inverted U-frame built out of steel I-beams used in conjunction with a 3½-ton chain hoist fastened in the center at the top (Fig. 6) These frames were tilted slightly forward so that they would clear the leading edge of the wing, and they were braced on either side by two steel cables which were anchored to the horizontal steel I-beams forming the feet of the frame. This type of construction was simple and cheap to build and could be salvaged almost 100 percent after the assembly operations were completed. These hoists were located in the assembly area just outside of the assembly building, and others were located at the airport proper, where the flight test operations were to be carried on. Another problem to be solved was to find some way to get the large and heavy airplane crates from the docks out to the assembly building 11 mi. north of Rangoon. The box containing the fuselage and motor was approximately 35 ft. long, 10 ft. high, and 6 ft. wide and weighed just under 8,000 lb. The box containing the wing was approximately 40 ft. long, 10 ft. high, 5 ft. wide, and weighed approximately 8,300 lb. Obviously, none of our standard trucks then available could handle the job of taking these crates out to the assembly building. There were in Rangoon at that time scores of truck assembly plants and truck body manufacturers who were busily engaged in assembling trucks that were to be used to transport supplies over the Burma Road to China. We needed at least two large truck trailers, and knowing the size they would have to be, we took our problem to one of the larger truck body manufacturers who worked up a satisfactory design and built them in a month. (Fig. 1)

They served the purpose very well, and were easily disposed of to a local concern after our assembly operations had been completed.

Labor

Then came the problem of obtaining labor. Our company had previously been operating an aircraft assembly plant in southwestern China so we arranged to borrow a skilled American aircraft foreman by the name of Andrew Sargeant and a group of 175 trained Chinese aircraft workers. (Fig. 2) These men had had previous experience on other types of airplanes, but had never seen the P-40 type of airplane before. To assist them in the operation I prepared and had printed a quantity of standard letter-size cards on which were printed each individual step in the assembly operation as it was to be carried out. (Fig. 3) By the side of each item was a place for the signature or stamp of the crew supervisor who performed the job and for the inspector who followed him. There were places on the top of the card for engine and airplane numbers and other pertinent information. As each airplane was uncrated, a card was filled out and attached to the airplane, remaining with it until the airplane was finally delivered to the airport for flight test. This system worked out unusually well in practice, and was of great assistance both to the workers themselves and to the inspectors who put their final O. K. on the airplane.

Assembly Procedure

When these boxes were loaded on our trailers at the docks and transported to the assembly area, all further unloading and handling operations had to be carried out with manual labor. For work of this nature we employed a large number of Indian coolies. (Fig. 4) When the boxes arrived at the assembly area they were skidded off the trailers onto the ground, and scores of coolies held ropes tied to the top of the boxes to prevent them from toppling over as they were unloaded. (Fig. 5) When an airplane was needed for assembly, the top and sides were removed from the crate containing the fuselage. The bottom or floor of the crate was left on, as it was attached to the fuselage with an angle iron framework. Sections of 4-in. pipe were used as rollers and the fuselage was then rolled and skidded into place under one of the hoisting frames. (Fig. 6) The fuselage sling was then attached to the rear of the motor mount and the airplane hoisted into the air. With the fuselage a few inches off the ground, the bolts attaching it to the bottom section of the crate were removed and the bottom section

FIG. 4. A group of Indian coolies employed for thee arduous task of unloading the airplane crates at the assembly area.

FIG. 5. The crates were unloaded by means of skids from the trailers. The strong-armed coolies eased the crates down the skids and kept them from toppling by means of ropes.

FIG. 6. The tops and sides of the fuselage crates were knocked off, and the fuselage, still mounted to the bottom of the crate, was rolled up to the hoist.

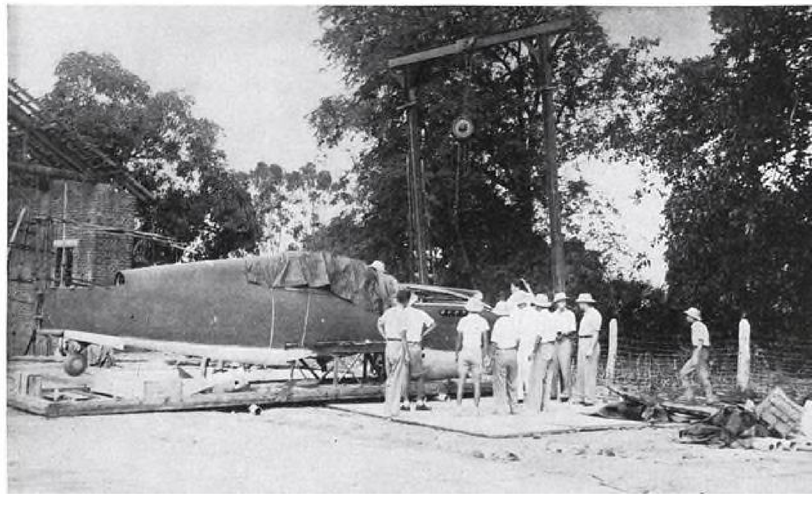

of the crate was then taken away. The hoisting of the fuselage was then continued until it was high enough in the air to permit bringing the wing underneath it. (Fig. 7.)

The wing case contained the wing proper in one piece, all of the tail surfaces, fairings, and the propeller. At this time the wing case was disassembled and the tail surfaces and the propeller were removed. Then the wing was carefully lowered to a horizontal position by hand using as many coolies as could conveniently get a grip on the wing without getting in each other's way. The wing was then carried by hand over to the place where the fuselage was hoisted and waiting for the wing. As the wing panel alone weighed over 2,500 lb., this was no mean task, and it was always surprising to me to see how much weight these coolies could carry, both individually and as a group. The wing was brought into position beneath the fuselage and supported on two wooden horses which were heavily padded where they came into contact with the lower surface of the wing panel. The fuselage was then lowered onto the wing and the bolts holding the wing to the fuselage were put in place and tightened. The entire hydraulic system was then connected up and put into operation. The airplane was then hoisted again into the air and the horses supporting the wing were removed. At this time the hydraulic system was tested for leaks, and the landing gear was lowered and checked for proper operation. If everything was in proper working order, the airplane was then lowered to the ground and rolled away on its own wheels to make room for another airplane under the hoist.

Considerable assembly operations were carried on with these outside hoists before the assembly building was completed. When this was completed there were facilities for hoisting and assembling four airplanes: Two inside the assembly building, one outside the assembly building, and one at the airport. The assembly building (Fig. 8) had a lean-to on the west side which was divided into several rooms including the drafting room, a battery room, a stockroom, an instrument room, a first aid room or hospital, and the office.

FIG. 7. The simple but effective hoist was designed by the author and was employed to keep the plane off the ground until the wing was mounted and the plane sufficiently assembled to be rolled away on its own landing gear.

FIG. 8. The completed assembly building at the airport. Steel trusses were substituted for wood because the latter could not support the weight of the airplane. This delay in construction of the building was overcome by the outside assembly hoists—which were maintained after completion of the building giving a total of four assembly fixtures.

Assembly Time Improved

There was sufficient ground space to store ten airplanes in their crates and also space for the assembly crew to work on five partly assembled airplanes. As soon as the airplanes were rolled away on their own wheels, a supervisor and his crew were assigned to it to continue assembly operations. It was customary, after operations got into full swing, to have complete crews working on as many as six or seven airplanes at one time. There was also another crew assigned to the airport for the purpose of getting the airplanes ready for flight, warming up the engines, and making minor adjustments after the airplane had been flight tested. In the beginning, the first airplane required approximately three weeks from the time assembly was started until the airplane was ready for flight test. The time required for assembly steadily decreased as the crew gained experience. After approximately one-half of the airplanes had been assembled, the assembly crew had become so skilled in their work that they were turning out airplanes at the rate of two to three per day. This is quite a compliment to the Chinese crew, and shows that they are much better workmen and mechanics than we have been accustomed in the past to think. About 15 members of the assembly crews were supervisors and they were the only ones who spoke English. These supervisors studied the Curtiss-Wright assembly handbook constantly and were instructed and guided in their work by Mr. Sargeant, who had had wide experience in all types of airplane construction and assembly. The workmen themselves were intelligent, but they did require constant supervision. Although the supervisors spoke English, their vocabulary was not very large, and it was often difficult to make them understand just exactly what was desired. However, when they once understood what we wanted, the work was carried out quickly and efficiently. During the latter part of the assembly period we had available the services of a Mr. Coo, of Allison Motors, who spoke English and Chinese fluently, and was of great assistance to us, both as an instructor to the Chinese crew and as an interpreter whenever we got in a tight spot.

FIG. 9. These mat sheds were built to protect the forward part of the planes from the blistering sun which caused the metal to become so hot that it could not be touched.

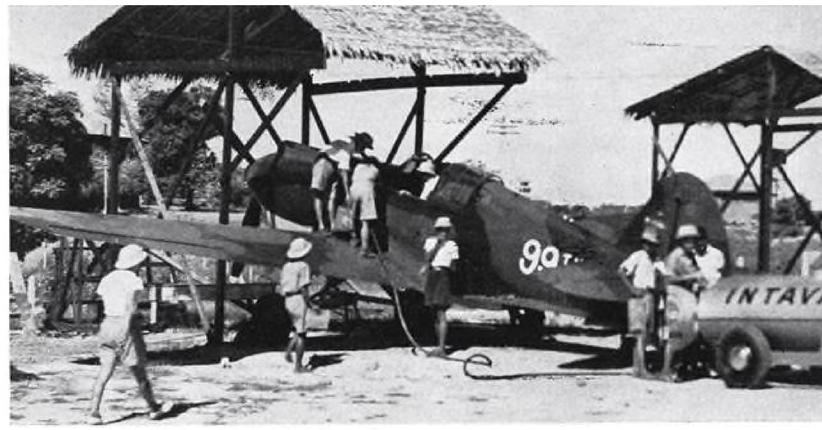

Aided by Aircraft Design

The disassembly and crating of the airplanes at the Curtiss-Wright factory was designed with the idea of making the airplanes as easy to reassemble in the field as possible. The fuselage assembly contained the motor, the oil tank, the Prestone tank, the fuselage fuel tank, the battery, the oil tank, and the Prestone and oil radiators, all connected up so that the motor could be run as soon as the propeller was installed. The entire wing was in one piece with the exception of the wing tips and had only to be bolted to the bottom of the fuselage with approximately 44 bolts. Connections to be made between the wing and the fuselage after they had been joined together were fuel lines, hydraulic lines and electrical connections. The landing gear was completely installed in the wing panel at the factory and was ready for operation as soon as the hydraulic lines were connected. As soon as the wing was installed on the fuselage and the hydraulic system was put into operation, the airplane could be rolled around on its own wheels to a location where assembly could be continued. At this time the control surfaces, the propeller, and the fairings were installed. The only rigging necessary on the airplane was to see that the control surfaces moved through their proper range and that all controls were free. The planning of the whole of the above was such as to provide a maximum of ease and simplicity for assembling the airplanes in the field. Out of the 100 airplanes shipped, only one was damaged in shipment. The wing case on this airplane was dropped in the water in New York Harbor while loading it and when it arrived in Rangoon the wing was so badly corroded that I did not think it safe to assemble and fly this airplane. This was extremely fortunate in one way, since it gave us a source of extra instruments and other necessary spare parts. Most of the trouble experienced on the airplanes was due to the instruments going bad in transit, probably due to jarring and exposure to weather on board ship. Some of the instruments could be repaired, but some of them were beyond local repair. There was a shortage of all kinds of small hand tools, wrenches, vises and special engine tools. We experienced a great deal of spark plug trouble, probably due to the high humidity during which flight operations were carried on, and also due to the fact that we did not have the proper tools for overhauling and setting the gaps of the spark plugs. There was only one case of complete failure of a magneto.

Flight Testing

When the airplanes were completed, the engines were given a preliminary run up at the assembly plant and then they were either towed or taxied down the main highway for a distance of 1 mi. to the airport proper, across the airport to one corner where our flight test area was located. The flight test area was located off the main runways on the south edge of the airport. The ground was very soft off the runways, and we found it necessary to construct taxi strips of crushed stone from the flight test area out to the runways. All of the flight test operations were carried on during the rainy season. Although it does not rain all of the time during the rainy season, it does rain a large percentage of the time. There are rainy periods of from three days to one week, followed by clear weather for two or three days. During the rainy weather there are three or four heavy rain squalls each day which last for from one to four hours. In between these rain squalls there are periods of from one to two hours of clear weather during which flight operations can be carried on. When it is not raining the sun is shining brilliantly and the air is both very hot and very humid. The high humidity caused excessive condensation in the fuel tanks overnight and it was found necessary to drain the water from all fuel tanks and to drain the fuel strainers immediately prior to each flight. The sun shining on the unpro-

(*Turn to page* 320)

FIG. 10. One-half of the airport hangar. This building was used whenever an airplane required long or extensive repairs.

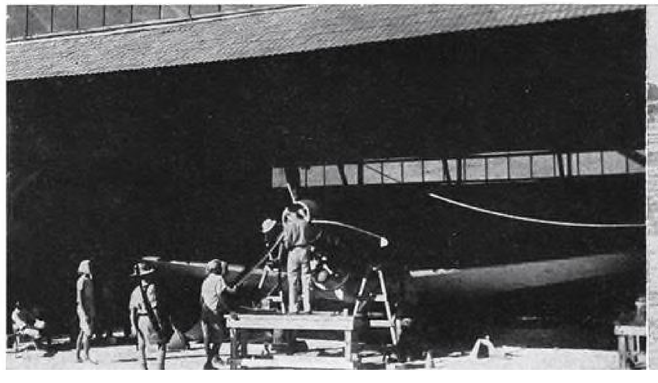

FIG. 11. Line of completed P-40 "Tomahawk" airplanes awaiting delivery to American Volunteer Group pilots.

IT'S LIKE THE OLD SHOE— IT FITS

A leading executive tells why airline maintenance is as good and better now than ever before.

By PAUL E. RICHTER, *Executive Vice-President, Transcontinental & Western Air, Inc.*

HERE IS HOW THE nation's airlines are able to carry out numerous war-effort assignments, yet keep maintenance and safety standards of their commercial fleets even higher than before Pearl Harbor:

Master craftsmanship, plus familiarity with tried and true equipment—the DC-3 transport!

The "how it's done" question is one most frequently asked airline operators. In my opinion, the answer is the simple one stated above. This type of transport, which has been standard on airlines for a number of years, is like the old shoe—it fits.

The auto mechanic who spent six years working on model-T cars knew just where to look for every squeak or wheeze. Through years spent on DC-3 equipment, our maintenance crews, likewise, have become familiar with every nut, bolt and screw on the transports, which have proved their sturdiness and reliability in virtually every part of the world.

All the "bugs" were removed long ago. The maintenance specialist, through these years of experience, knows exactly what adjustment is necessary. Jobs are better organized, so there is no lost motion. Through increasingly efficient procedure, the crews know just when the next plane will be in the hangar and just what operation is necessary to keep it at peak performance.

We realize it is our patriotic duty to carry every ounce possible on equipment available and operate that equipment more hours daily and at the same time continually raise our high standard of maintenance and safety.

To operate our planes longer hours, more rapid turn-around of our aircraft is necessary and our maintenance dispatching procedures have been of great benefit in this regard. In order to keep an even flow of maintenance and overhaul operations coming into our bases, the planes are scheduled in such a manner that a large number of major changes and service operations will not fall due at the same time.

In addition, TWA is perfecting a system whereby mechanical personnel at terminal stations are trained as specialists. To a certain extent, this system increases the man-hours, but it reduces the time a plane is tied up for maintenance.

During the month of September, 1941, maintenance and overhaul work required a total of 97,737 man-hours while in the same month this year the man-hours totaled 83,042, although we were operating considerably less equipment, proving that safety standards have not been sacrificed.

The maintenance personnel at our principal stations, New York, Pittsburgh, Chicago, Kansas City, San Francisco and Los Angeles, totaled 986 in November of 1941. In November of this year the total had jumped to 1,335 at these stations. These specialists were engaged exclusively in the servicing of commercial planes at all stations except Kansas City. At the latter, the crews spend some time servicing government equipment. Trained service crews are maintained at all other stations along TWA's coast-to-coast system.

Although our commercial fleet has been reduced 43 percent to meet the needs of the military, our higher utilization of equipment has made it possible for us to hold the decrease in commercial plane mileage to 23 percent. During October, this year, for example, we flew 1,347,437 revenue plane miles in our commercial operations compared to 1,745,239 in October of 1941 when we operated 43 aircraft units as against 25 this year.

Proof that maintenance standards of TWA are higher than ever before can be found in a comparison of slight flight delays owing to minor mechanical adjustments. In last winter's operations, mechanical delays averaged one every 11,000 mi. flown, while in October of this year the average was one delay in every 16,000 mi.—a substantial indication of increased maintenance efficiency.

Holder of transport pilot's license No. 501, with more than 3,500 logged flying hours, Paul E. Richter, executive vice-president of TWA, knows whereof he speaks when it comes to airline operations.

Our DC-3 fleet was scheduled to operate 11:14 hours per plane daily in October, 1942, equalling the high efficiency figure attained in the operation of our former fleet of five Boeing *Stratoliners*. The 33-passenger *Stratoliners*, which TWA had in domestic service, have been operating for the Army in foreign courier service since last March.

Every non essential item has been removed from the planes so they can carry the greatest possible loads of vital materials and passengers. In October, this year, for example, TWA utilized 92 percent of space available in its fleet. This includes passengers, express and mail. Our express pound miles for nine months of 1942 show an increase of 151 percent over the corresponding period of 1941.

Another improvement in service was accomplished this year through a flight control center in Kansas City which facilitates handling of passengers, mail and express.

There has been no let-down in our training of flight crews and the men hired as first officers have requirements far exceeding the minimum qualifications. Records of a group of 50 first officers recently employed by TWA show that the average solo flight time for the group was 933.9 hours, the average age 25.9 and the average intelligence quotient was 104.5 as against a so-called desirable grade of between 90 and 110. Sixty-four percent of these men have had one or more years of college and 20 percent are graduates of an accredited university. The average attended college 2½ years.

In respect to age, it is well to remember that young men now qualified for airline work have been flying for years and they were able to pile up more hours in their youth than my generation of fliers did in theirs. Many of them have been flying since they were 15 years old. The average total hours of flying experience of first officers prior to employment by TWA is approximately the same as a year ago. In addition, more training has been provided, including a complete course of instrument instruction.

The biography of old 301, the father of the Douglas DC-3 transport, which

(*Turn to page* 315)

After a tremendous record of achievement during the past seven years of unprecedented airline growth, there was never any question but what the DC-3 could be depended upon to handle a vast amount of wartime traffic. One of the principal reasons for this is that it is a maintenance man's airplane—designed for easy maintenance.

Press Association photo

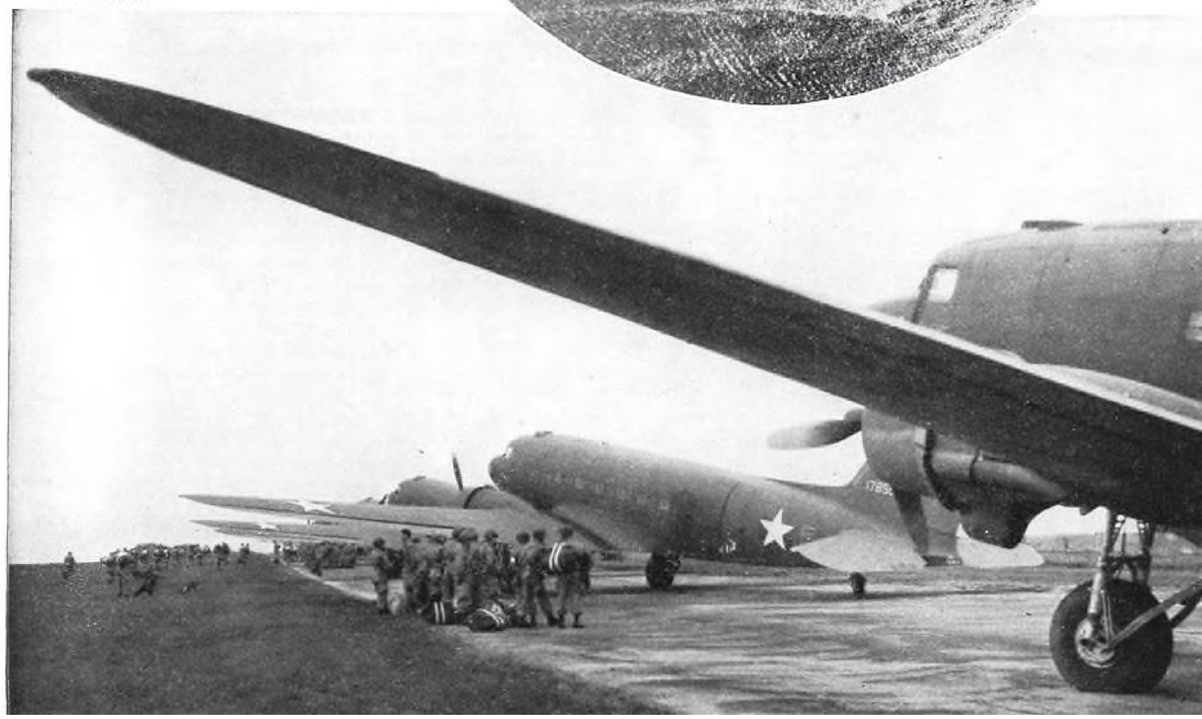

We Learned War Maintenance With the AVG

Press Association Photo

Peacetime maintenance methods apply on the battle fronts up to a point. From there it is a matter of learning the hard way. And you must learn quickly to survive—you must survive to keep 'em flying.

The author in front of operational headquarters in China.

By TYE M. LETT, JR.

Overseas Representative, Allison Division of General Motors

GLOBAL WARFARE, requiring the operation of military aircraft thousands upon thousands of miles from the place of its manufacture and the home nest of spare parts, is creating new concepts and imposing heretofore unheard of conditions upon maintenance and service. Certain basic principles of the all-essential effort to "keep 'em flying" remain as good and as sound as in the days when they were evolved in peacetime operations. Truths discovered, and sometimes too quickly forgotten in the easier times, emerge under the stress of war as shining commandments never to be violated.

Holding to these truths in the very first organizational stages of developing a program of maintaining and servicing an aerial combat force on some distant fighting front, the pattern of actual operation is likely to change under the exigencies of war until in many instances it will have little resemblance to its peacetime counterpart. All of this and more we of the Allison Division of General Motors, who were permitted to assist in keeping up to fighting standards the equipment of the Flying Tigers of the American Volunteer Group in China, have learned under the stress of battle.

For instance, in the type of warfare waged in that theater of hostilities—and the same will apply in the Libyan desert, in the wilds of New Guinea, or in French Equatorial Africa—one fixed base for all supplies and materiel is out. Nor in global warfare should a single, fixed line of communication back to the home factory, half a world away, be depended upon to bring up spares and replacements. We learned this latter lesson the hard way once when for a much needed shipment of spares for the AVG we designated but one delivery point—Rangoon—and the shipment was only half way there when the Japs closed that port. To the best of the writer's knowledge the shipment wound up in Karachi, where we were never able to get our hands on it.

Home Representatives

On the other hand regardless of the state of the world—whether at war or at peace—no field representative setting forth on a maintenance assignment would think of leaving his factory without first designating a home representative fully conversant with the special problems in the field, who would always be on hand to follow through on orders, to see that they were filled as quickly as possible and to see also that the required materials kept flowing to the scene of operations.

This first and basic truth of service we did not overlook when, early in the program which resulted in the creation of the AVG, the Chinese asked Allison to undertake the engine maintenance for the fleet of Curtiss P-40's, powered with Allison V-1710 C-15's with which the Flying Tigers later established a combat record which has no peer in World War II to date.

General organizational plans for our service mission, which included extensive Washington conferences, were worked out by O. T. Kreusser, director of Allison Service and Training Depart-

Press Association Photo

Dispersal of maintenance centers was the key to survival. Only simple ground servicing was performed at the operational field. Chennault's order was that "if a plane cannot be prepared for flight within 15 min., it should be withdrawn to a dispersal point for servicing by other maintenance personnel."

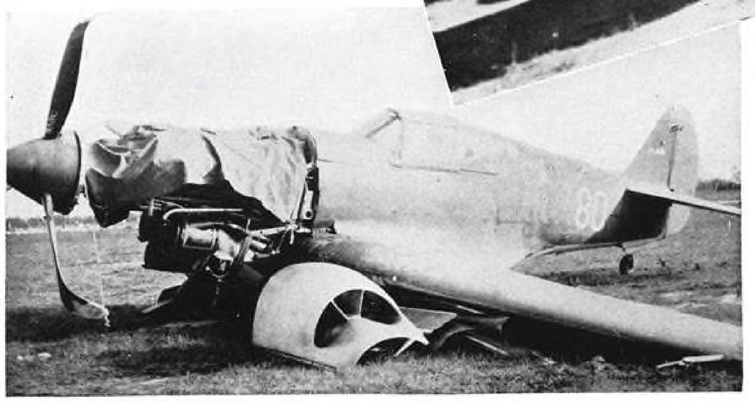

"Cannibalism" was developed to a fine point. Here is an "enemy operated on" P-40, retaining its high value to the AVG as a source of spare parts.

Press Association Photo

Press Association Photo

First and Second Echelon maintenance were jobs requiring less than 15 min. Work beyond this was carried on at secret dispersal bases. Here is E. A. Janski of Chicago checking propeller pitch "somewhere in Asia."

ment, who had had experience with such problems in the last war.

Col. Chennault early indicated his desire to recruit a unit of United States Army and Navy crew chiefs. When this plan materialized the selected crew chiefs underwent a month's intensive Allison training at Indianapolis. These became the nucleus of the AVG ground crew. Later eleven Chinese, most of them American born, who had aeronautical experience either in college or practical operation, took six weeks of training at Allison. It was with these men, who were indeed an industrious and competent bunch, that Allison found that we could count on real Chinese ability. These men had factory experience and had contact with the assembly and acceptance tests of spare engines, obtained by the Chinese and destined for the defense of China. All of them quit good jobs to put their technical skill into the fight. Nine of them got through to China and became the backbone of our Third and Fourth Echelon maintenance and overhaul crews at Kunming and Loiwing.

But in all of these preliminary arrangements we did not forget that all-essential factor—the home base trouble-shooter. To fill the role of anchor man for our mission (and incidentally because it was a Chinese one) we selected N. C. Liu, a graduate in aeronautical engineering from Purdue University. It was Liu's intelligent planning when we were gone and his efforts, working against transportation difficulties, red tape, delays and the rising tide of submarine threats, that expedited shipments to the Far East.

Not all that we ordered through Liu reached us and one shipment of engines and spare parts took 90 days from New York to Rangoon—normally a 35-day trip. But that takes us back to the problems imposed by war upon lines of communications; and the hazards of these affect what one should order in the field when on such a mission.

Cannibalism

In China we found that it was usually the little bits and pieces that grounded airplanes; parts like distributor points, small screws, distributor fingers, spark-plug, insulator tips and the like—small parts such as these gave us the real headaches.

To "keep 'em flying" for Chennault's boys we developed the practice of making two flyable planes out of three or four wrecked or damaged ones. This practice we called "cannibalism" and we developed it to a fine art. Every time we pulled this trick I said a little prayer for American standardization and the interchangeability of parts, which is a highly-to-be-praised characteristic of Allison engines.

This "cannibalism" has a direct effect upon what you should order from the "Home Front" and upon that which those serving you there should be prepared to supply you. For in "cannibalizing" you pick up a lot of certain kinds of extra spare parts. A good example is valve springs. As a rule you will get overstocked on these. Also the particular conditions under which your planes are operating and fighting, even to those of the weather, will determine the character of spares resulting from cannibalization. You should begin to figure upon this early from the first experience gained in the particular theater in which you are operating.

Press Association Photo

One of the many lookout stations high in the Burma mountains from which "cheeze it" was signaled when approaching enemy bombers were sighted. Operational fields were completely cleared of materials and planes-in-repair within 3 min. after an alarm was given.

Proper Appraisal of Parts Needs

Another truth of maintenance which appears quickly under the stress of war is that a large stock of all kinds of parts is not the answer to efficient field service. It would be better to have a large and varied assortment of the small bits and pieces available at the First and Second Echelons, for these are the parts usually most needed to put a plane back into action in a hurry. These vital First and Second Echelon parts should always receive first priority. The major parts, required by Third and Fourth Echelon operations, can be provided at longer intervals, and where quickly needed can be flown to hot spots of action in emergency.

A careful weighing of unit parts according to incidence of failure, of course, runs counter to the present unit system of setting up arbitrarily the number of parts needed to service an airplane for 60 to 120 days and multiplying that figure by the number of ships in the squadron. Too often the feeling is that parts are so vital that it is just as well to have them on hand though they are averages in certain categories. This is uneconomical in wartime when every part should be counted in man-hours and material.

Another wasteful practice that carries over from peacetime operation under ordinary laws of supply and demand is the practice of ordering 1,000 units, hoping to get 100. When, by chance, the squadron does get the 1,000 units—not the 100—there is a terrible consequent waste of labor, materials and transportation. And further it should be borne in mind that the squadron which receives the 1,000 units where only 100 were required may be dooming some squadron in another quarter of the globe to certain defeat.

Dispersal Points

Next we come to the matter of bases, depots and satellite fields. We originally planned grandly and optimistically to have ten outlying field maintenance operations, four sub-depots and two main overhaul depots. Experience in the field quickly taught us the error of such thinking. On the well-proven theory that you should never put all of your eggs in one basket, one main central depot will not do. A number of more or less co-equal depots should be set up. One of these, containing a large part of the reserve pool, should be located as far back of the main front as possible, but at a distance easily accessible at the worst by air. The other depots should be so located as to be in positions to have knowledge of special conditions and the changes in those conditions as they may occur in the sur-

(*Turn to page* 316)

Built to save lives!

BUILT for destruction — sure. But American planes are also built to *save* lives . . . the lives of our pilots and crews!

American planes are built with superior armor and fire power—equipped with precision instruments for every possible flight need—to take our men to objective *and bring them home again.*

Time after time, guided by instruments they fly hundreds, *thousands* of miles through pitch black night, through rain and fog and snow. They range deep into enemy territory and get *safely* back to base.

All of which adds up to one important reason why our Army and Navy Air Forces are proving more than a match for the Axis.

DESIGNING FOR EASY MAINTENANCE

Field service operator's work on Fleetwings BT-12 training plane simplified and speeded by cooperation of service and design engineering departments. This teamwork from the beginning has also proved an aid to production.

By J. A. KNOX, *Service Engineer and* J. J. BOERICKE, *Project Engineer, Fleetwings, Inc.*

IT IS AXIOMATIC THAT an airplane design that is good from a maintenance point of view is also good from a production point of view. If the plane is easy to maintain and service then it follows that it is likewise easy to build production-wise.

With that thinking in mind we designed the Fleetwings basic trainer, BT-12—the first military airplane ever built principally of stainless steel—which we are building in quantity for the Army Air Forces. As much attention was given in the design stage to the need for ease-of-maintenance of this ship as to the performance characteristics. We realized at the outset that a basic trainer is in the air hour after hour, day in, day out, is handled by fledgling fliers most of whom have had less than a hundred hours flying time, and therefore has to be tough and rugged and easy to service and maintain.

Every airplane designer knows that there are two principal approaches to employ in designing a plane that can be readily serviced. First, an effort is made to incorporate into the airplane parts that are inherently service-free. An example of this is the use of oilless bearings throughout the control system of the BT-12. Unlike plain bearings, these bearings will never require additional lubrication—they are lifetime lubricated. Another illustration of this point is the instrument panel which, because of the fact that fluorescent lighting is used to illuminate the instruments, does not have the multitude of electrical connections that usually are present. The face of each instrument is treated with a fluorescent paint, the result being that the figures appear luminous in the dark.

The second principal consideration calls for the use of easily removable units, both in the interior and exterior of the airplane. Perhaps the most apt illustration here is the use of large, readily removable sections of fairing on the fuselage. The design of the BT-12 is such that the entire number of fairings, extending from and including the ring cowling to the tail post on both sides of the airplane can be removed in less than 5 min., giving ready and complete access from the ground to the engine, accessory compartment, controls, radio and electrical systems.

The advantages of this feature are obvious. Consider, for example, the radio installation. If this equipment were to be installed and serviced through the cockpit the job would be exceedingly slow-going due to the cramped quarters for operating. Another example is the use of disconnect plugs and receptacles in the electrical installation. Use of plugs makes possible separate electrical units, any of which can be installed or removed and replaced in the ship with the greatest of ease. There are no solder connections to consume time and trouble when the plane is being serviced.

Metal-Plywood Combination

The fuselage fairing is a combination of metal and plywood panels, each of which can be removed quickly by means of fasteners. From a service standpoint the plywood panels are very acceptable—almost any woodworker or carpenter can repair them. Airplane parts, other than fairing and like pieces, that do not require frequent and rapid removal, are attached by means of a prefixed nut which facilitates servicing. A special stainless-steel nut cap for retaining a nut in position on stainless-steel parts and which is replaceable, is specified in the design.

The illustrations that accompany this article describe—graphically—some of the more important easy-to-maintain features that have been designed and built into the BT-12. In addition to these, the following several points also deserve mention.

The entire engine section, including the engine, engine mount, oil system, exhaust manifold, and accessories, can be removed from or installed on the airplane as a complete unit, or the engine alone can be removed or installed on the engine mount. The engine mount is of conventional, welded, chrome-moly steel tube design, readily removable, and is attached to the fuselage by four tension bolts. Guide pins have been provided for hole alignment for ease of installation.

The tail assembly also reflects the fact that this airplane has been designed for simple servicing. For example, right- and left-hand elevators are identical, thus permitting stocking of only one part. Elevator hinge brackets can be quickly replaced by removing only two bolts.

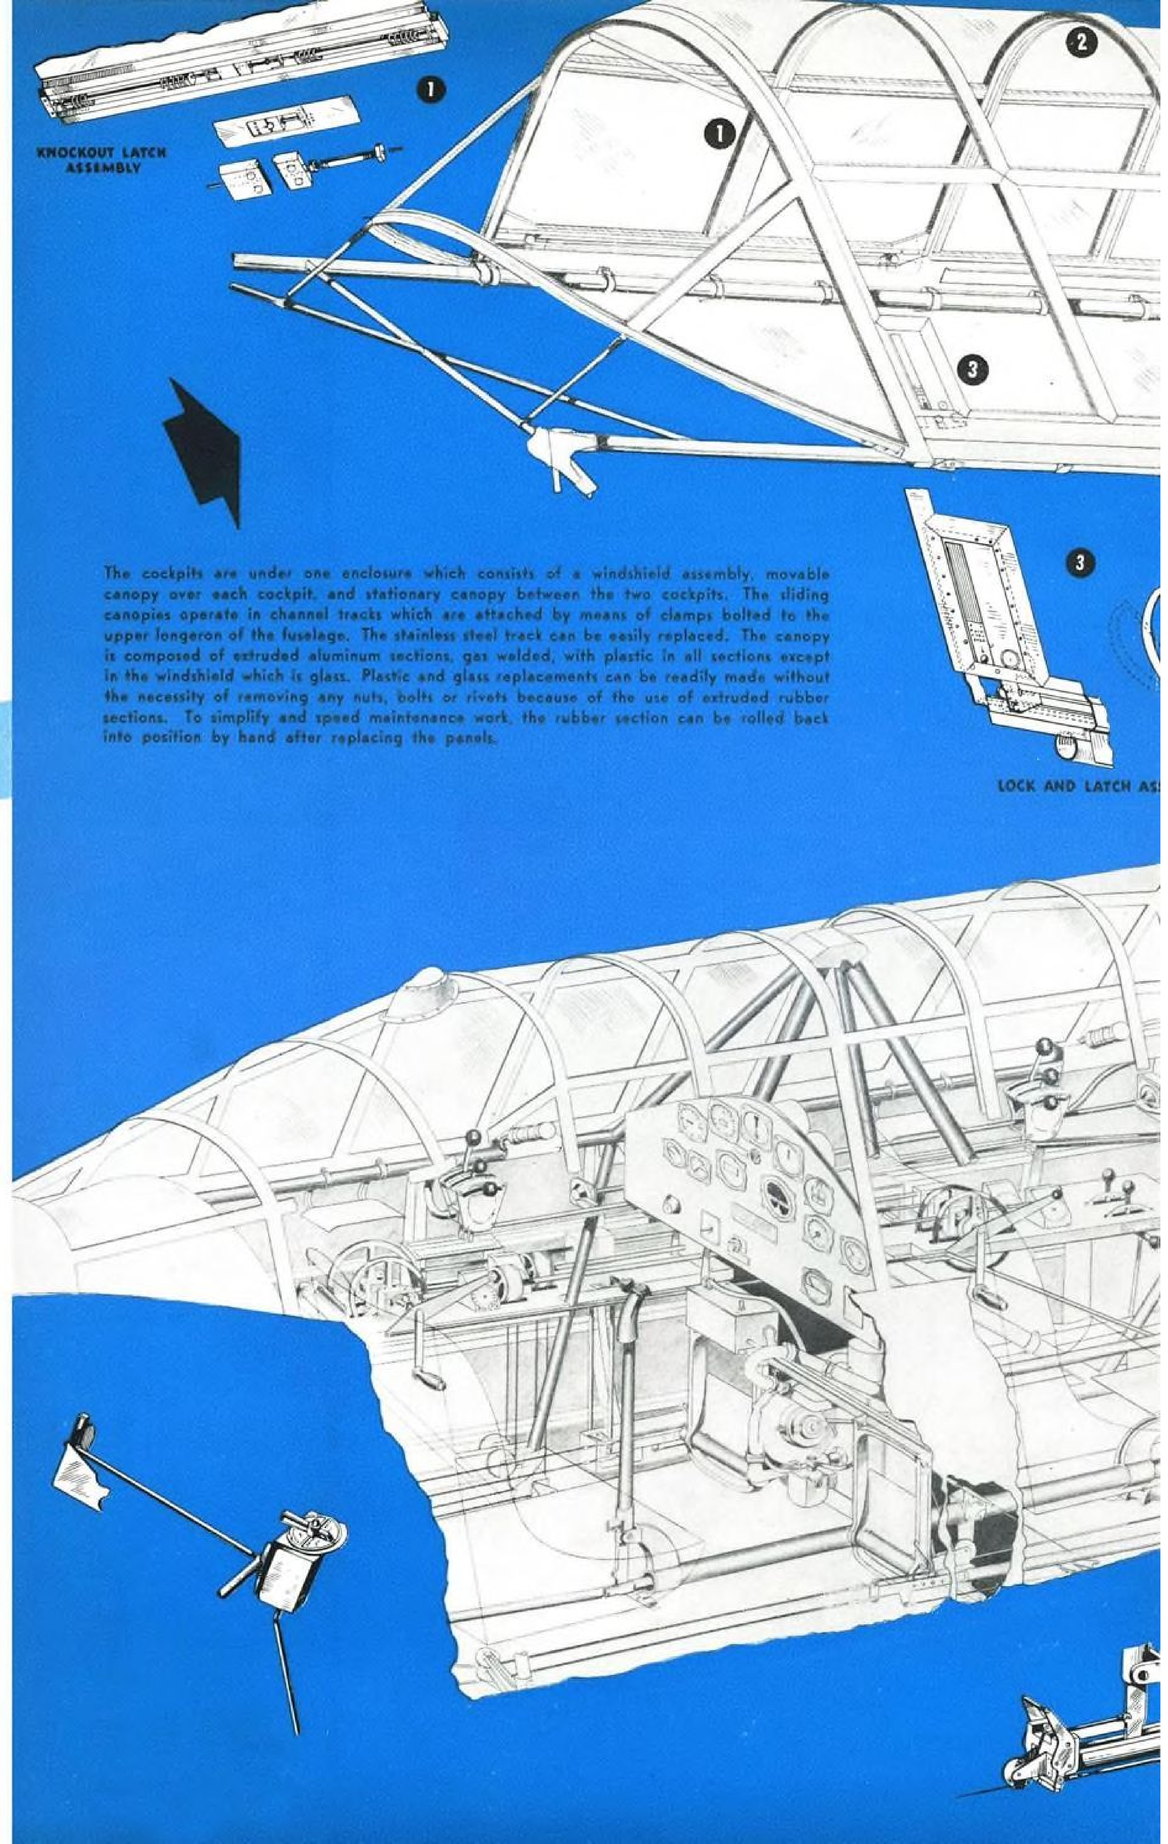

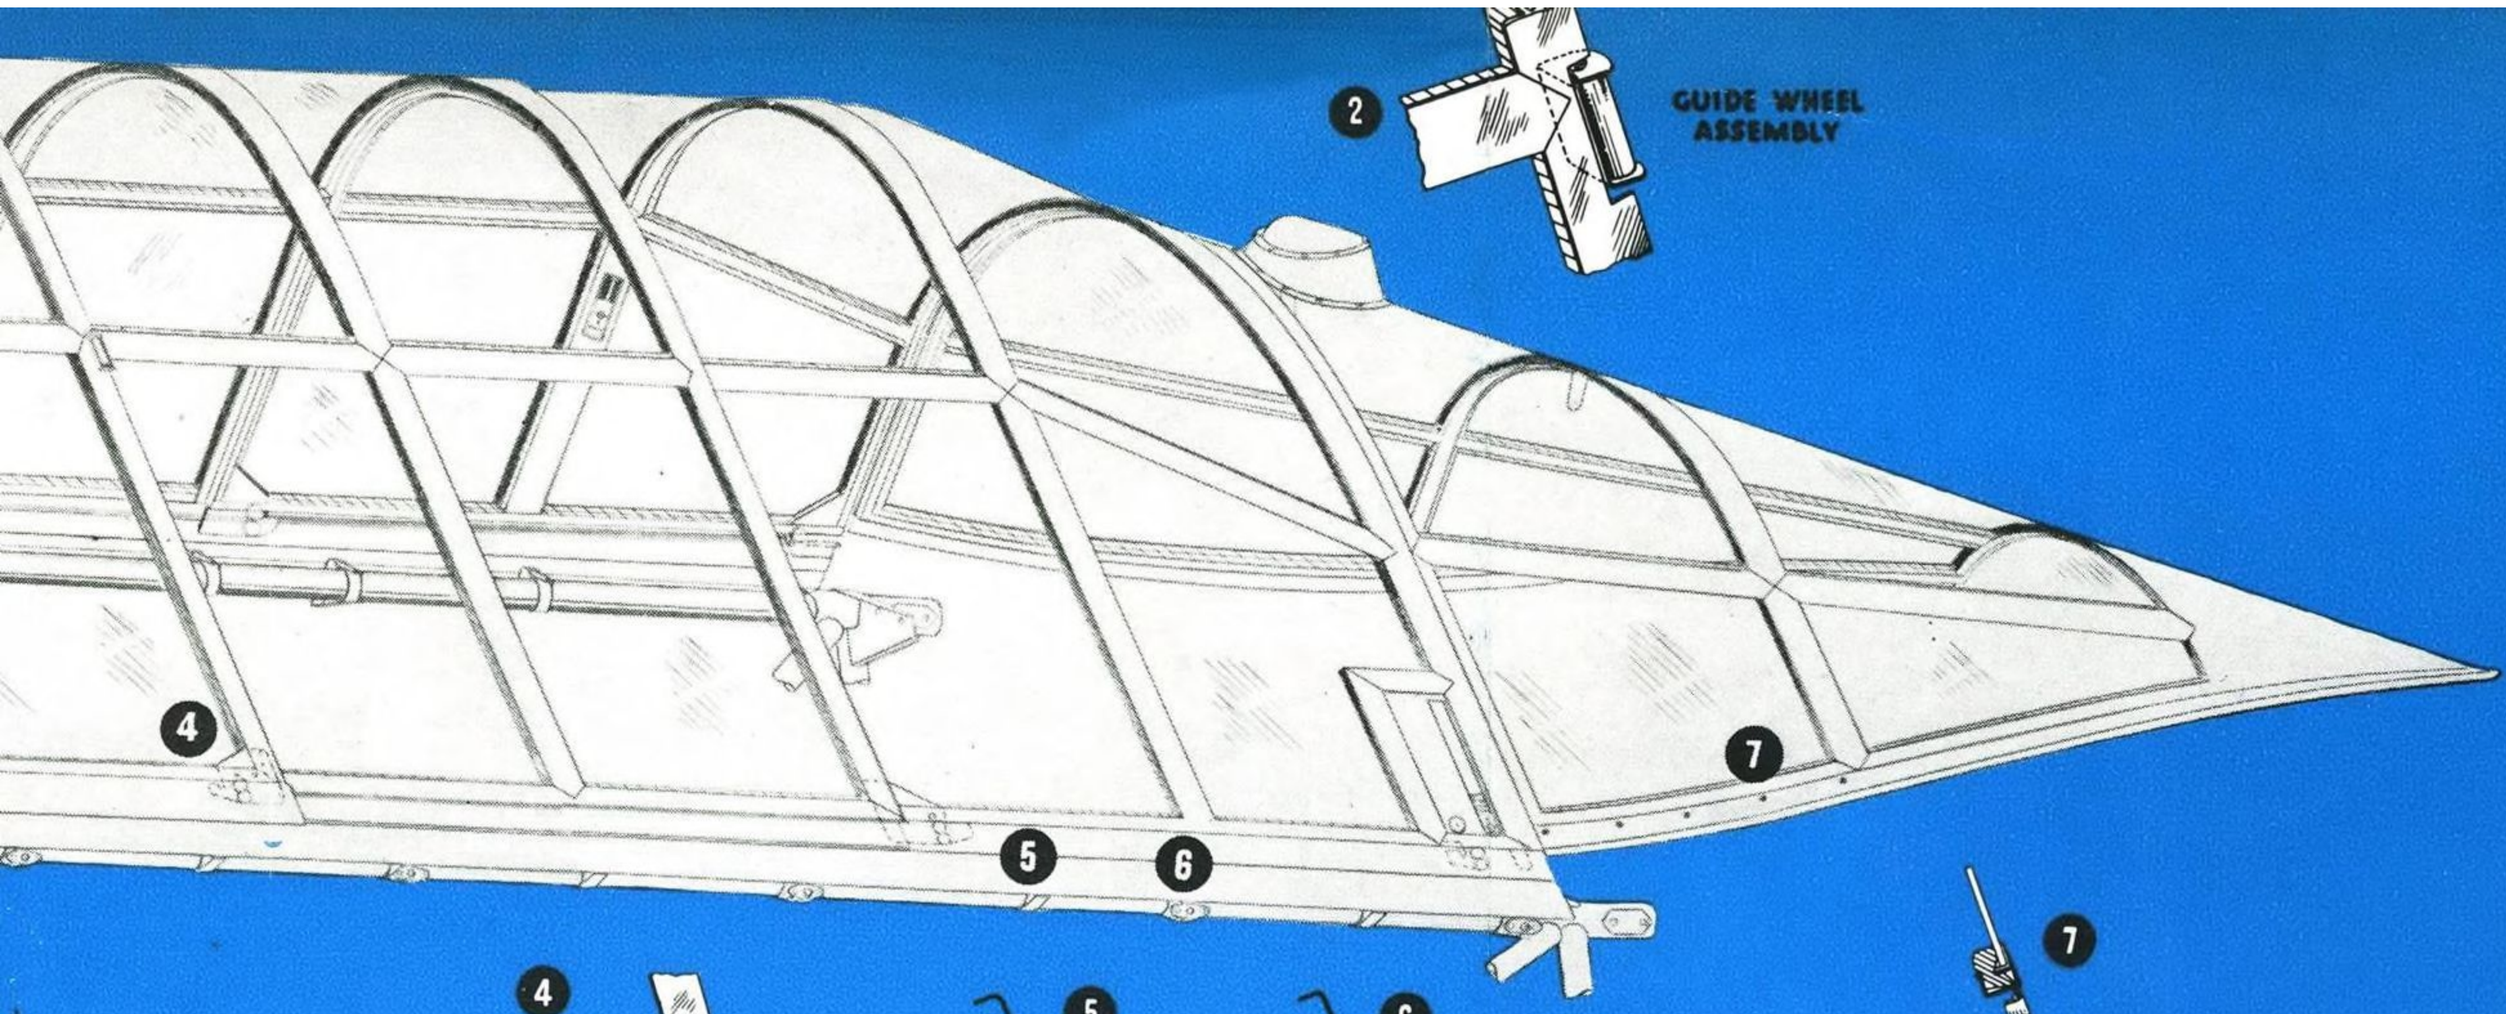

SEMBLY

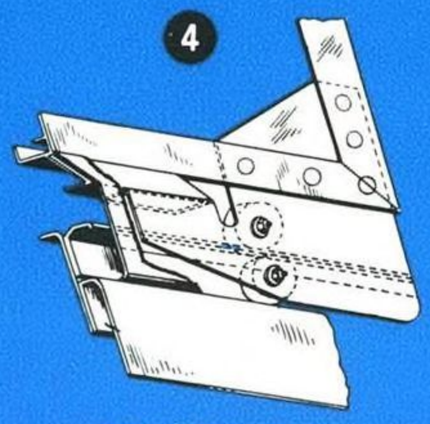

WHEEL ASSEMBLY

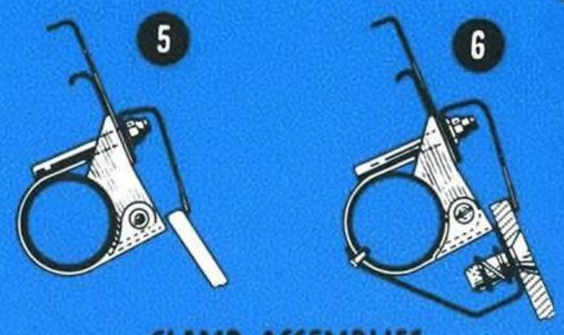

CLAMP ASSEMBLIES

Cabin interior. For servicing instrument panel, panel mounts, and instrument lines of the front cockpit, easy access is provided by removing top sections of the fuselage cowling in front of the windshield. All instruments are readily removable. The main electrical panel is equipped with circuit breakers, rather than fuses, thus eliminating need for frequent fuse replacement. Special attention has been given to the ease of servicing the main electrical junction box which is located on the left side of the fuselage just aft of the firewall. This box is accessible from the ground through a removable panel in the side fairing. It is partitioned to house its allied units which are accessible on removing one cover which is quickly detachable. All conduits are accessible from the outside by removing the side fairings, which is a very easy and fast operation.

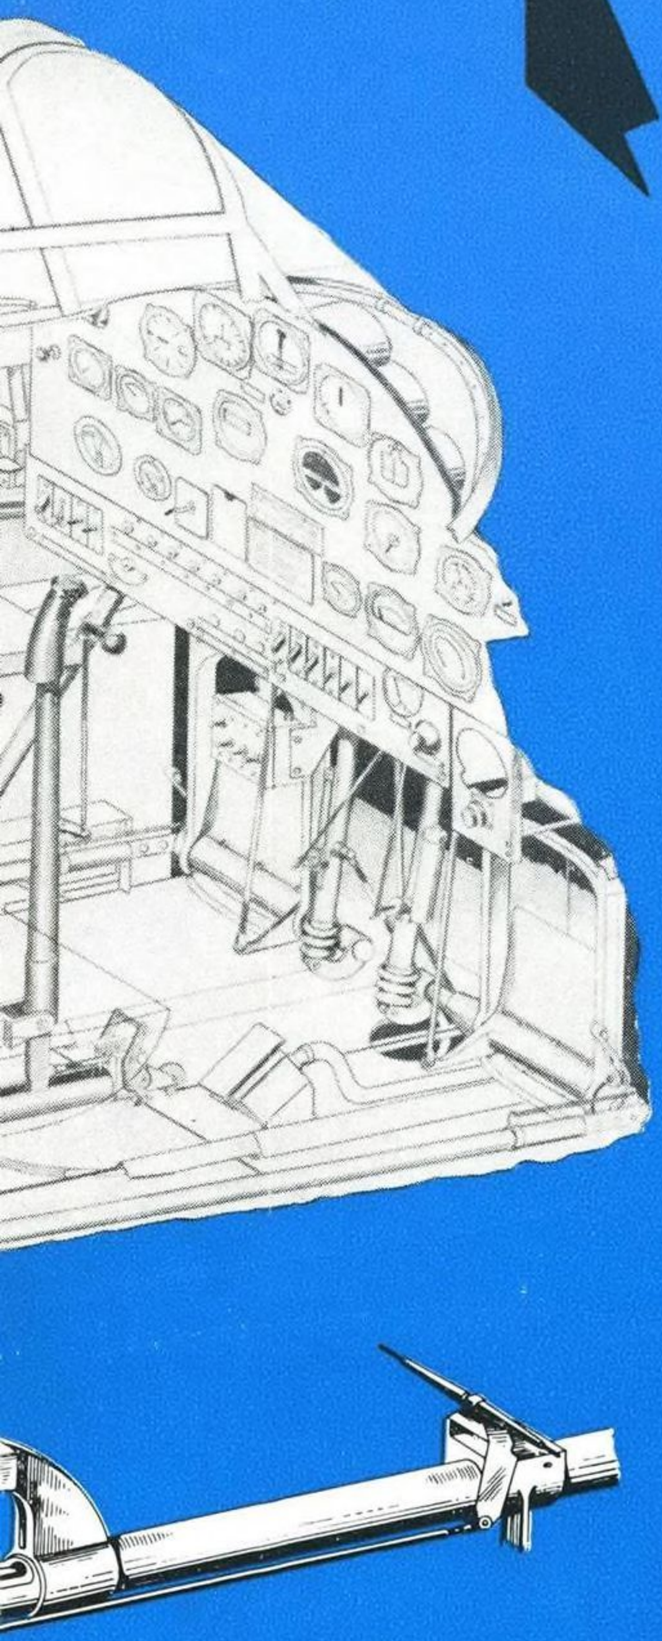

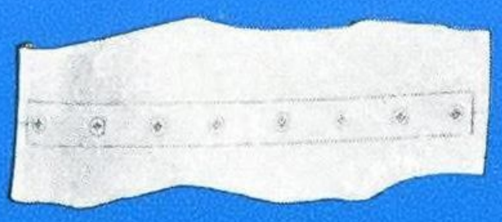

The ring cowl is of strong, tough construction, yet extremely easy to service. It is designed in four sections, any one of which can be easily removed by means of quick detachable fasteners. Ribs are rigidly attached to a chrome-moly steel tube ring, which is in turn, flexibly attached to rocker arm boxes by means of shear type rubber mounts. Aligning pins have been provided on ribs to expedite and ease the installation of the ring cowling sections.

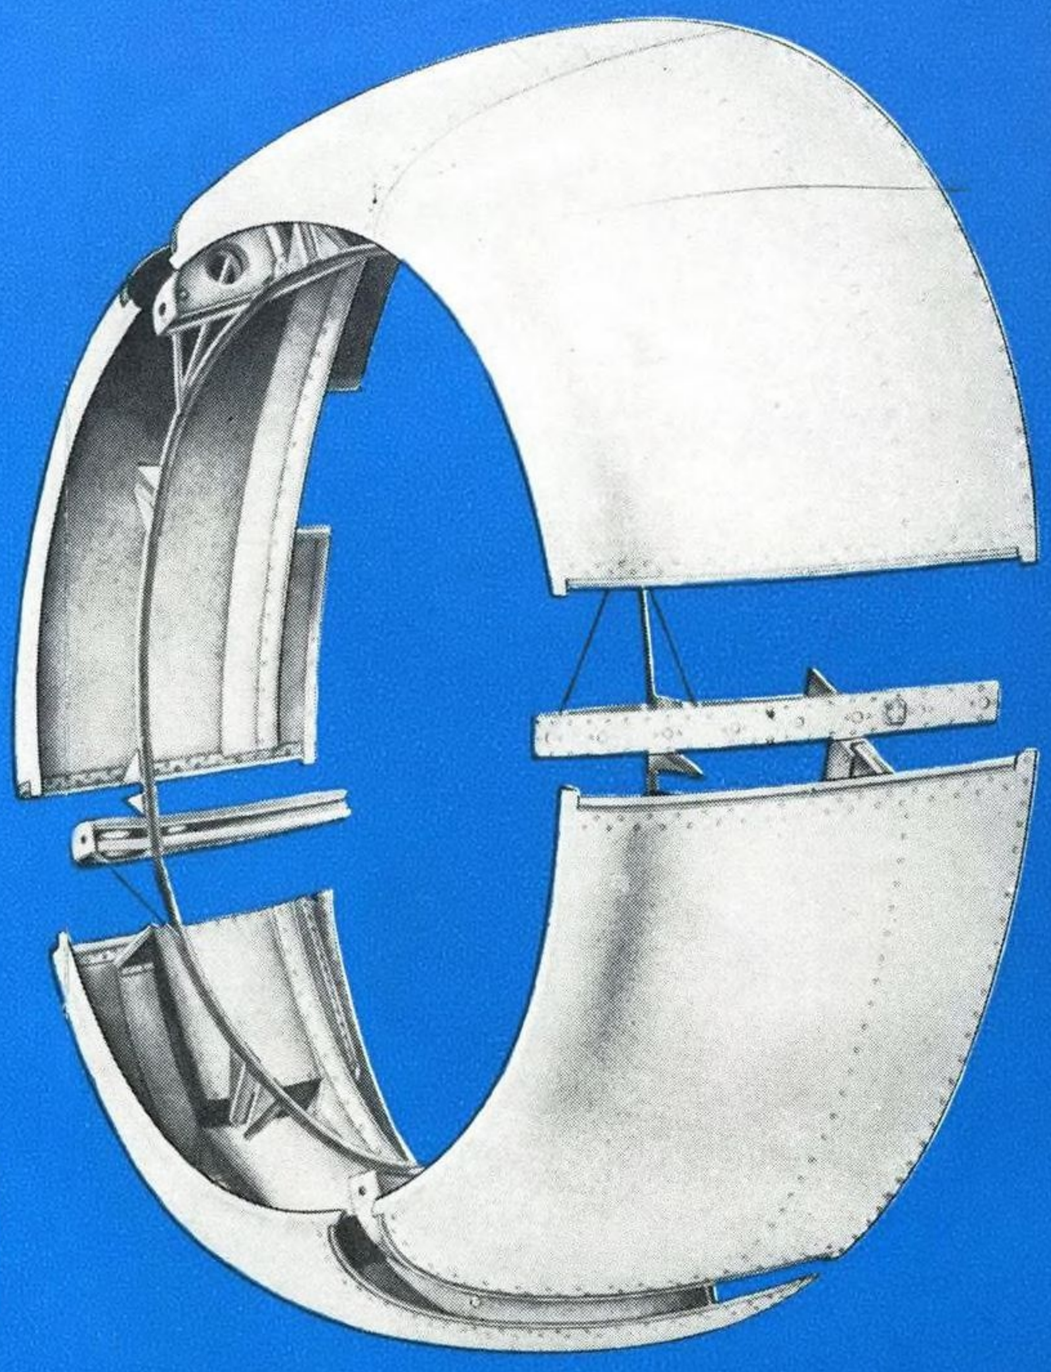

The landing gear of the Fleetwings BT-12 has been designed for ease of service and maintenance as well as strength. The cut-away below shows how the gear is attached to the front spar by four bolts through the sturdy fittings. The smaller illustration at top right is a view of the attachment at the spar from the rear, showing how the bolts go through the spar into the specially designed ribs. The upper part of the landing gear fairing is attached to the wing on an angle member and the extruded member, while the lower part of the fairing travels with the wheel and shock strut.

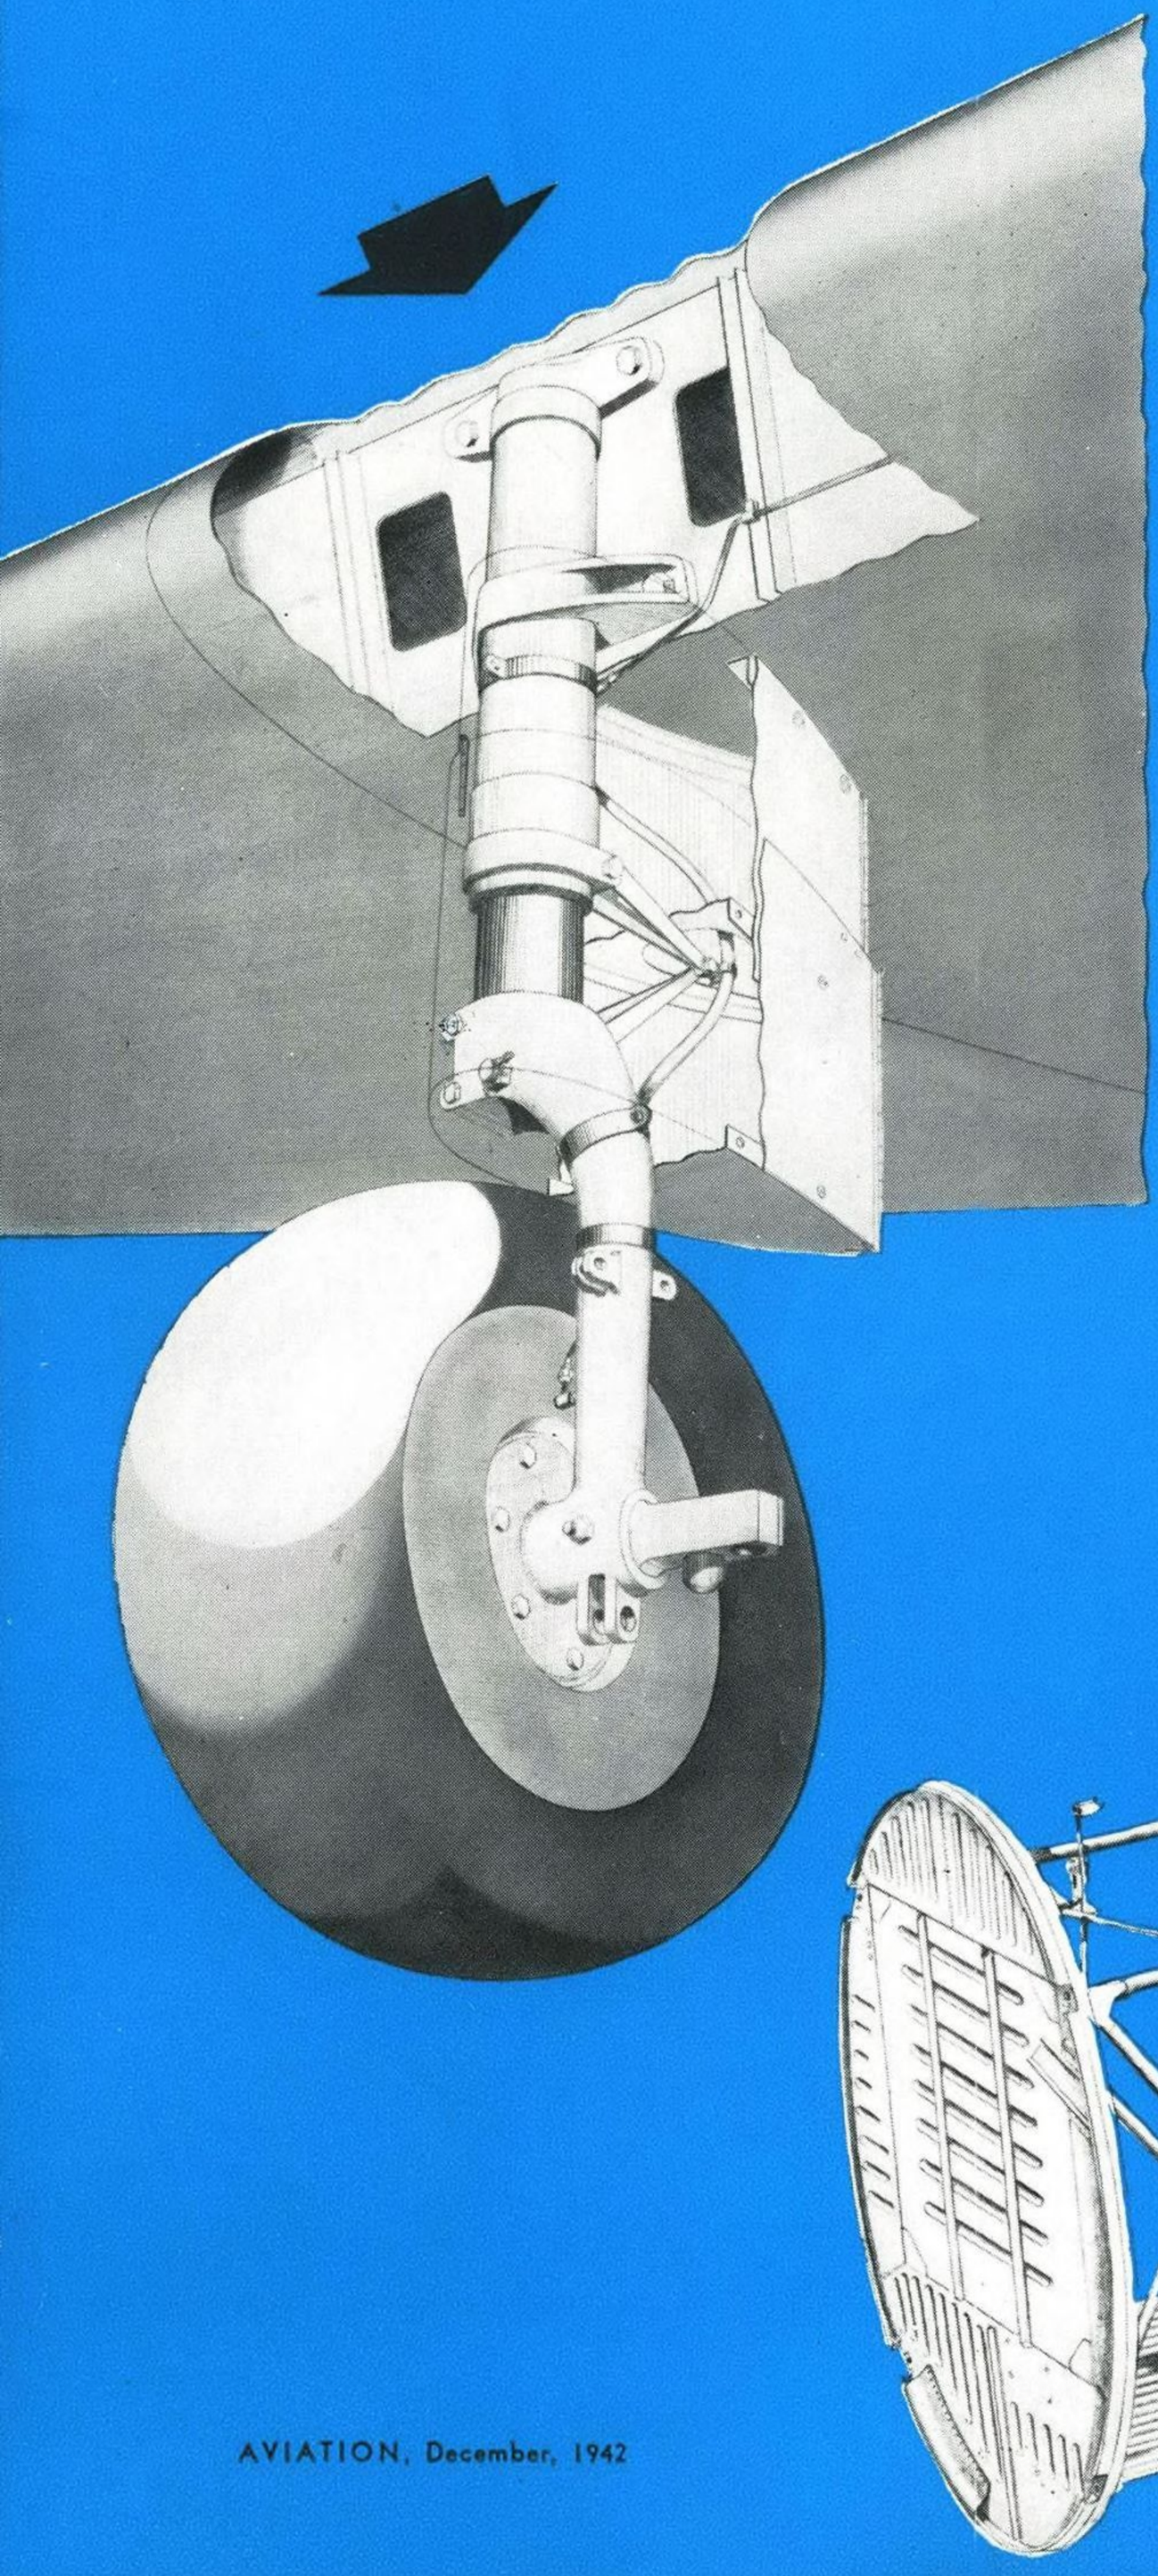

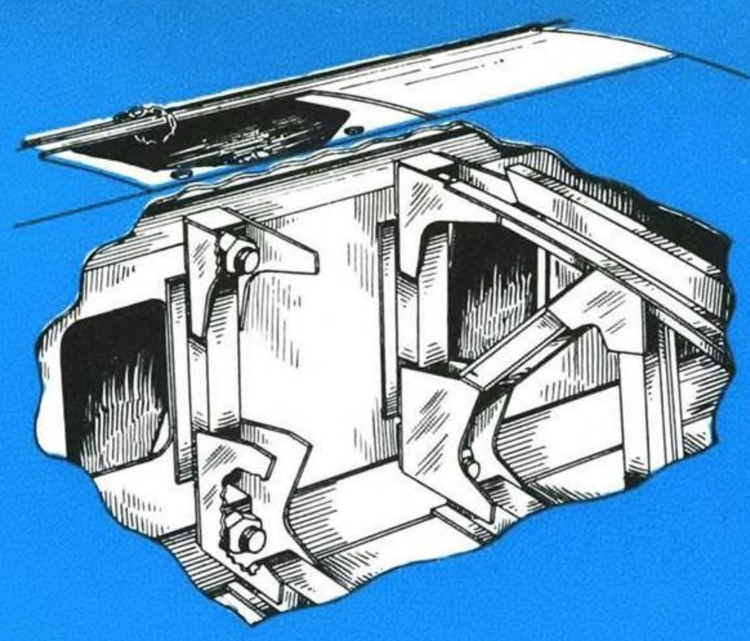



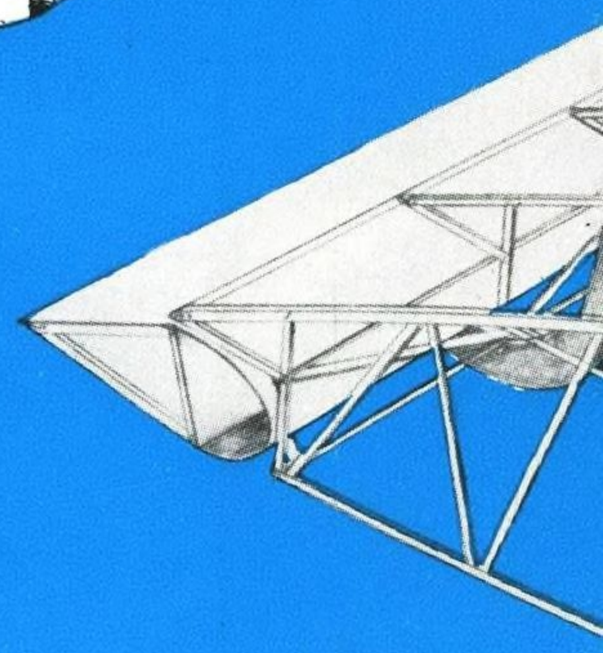

The outer wing panel is of stainless steel design consisting of stainless sh
reinforced with corrugation. The trailing ribs are bolted on rather than
manently attached to the main spar which makes for ease of replacem
The entire trailing rib structure is readily repairable because of its o
type construction. This stainless steel wing illustrates not only struct
qualities of this material for aircraft but also the simplicity of this typ
construction and shows, as well, its adaptability for modern shop produc
The wing tip is of plywood construction and is quickly detachable.

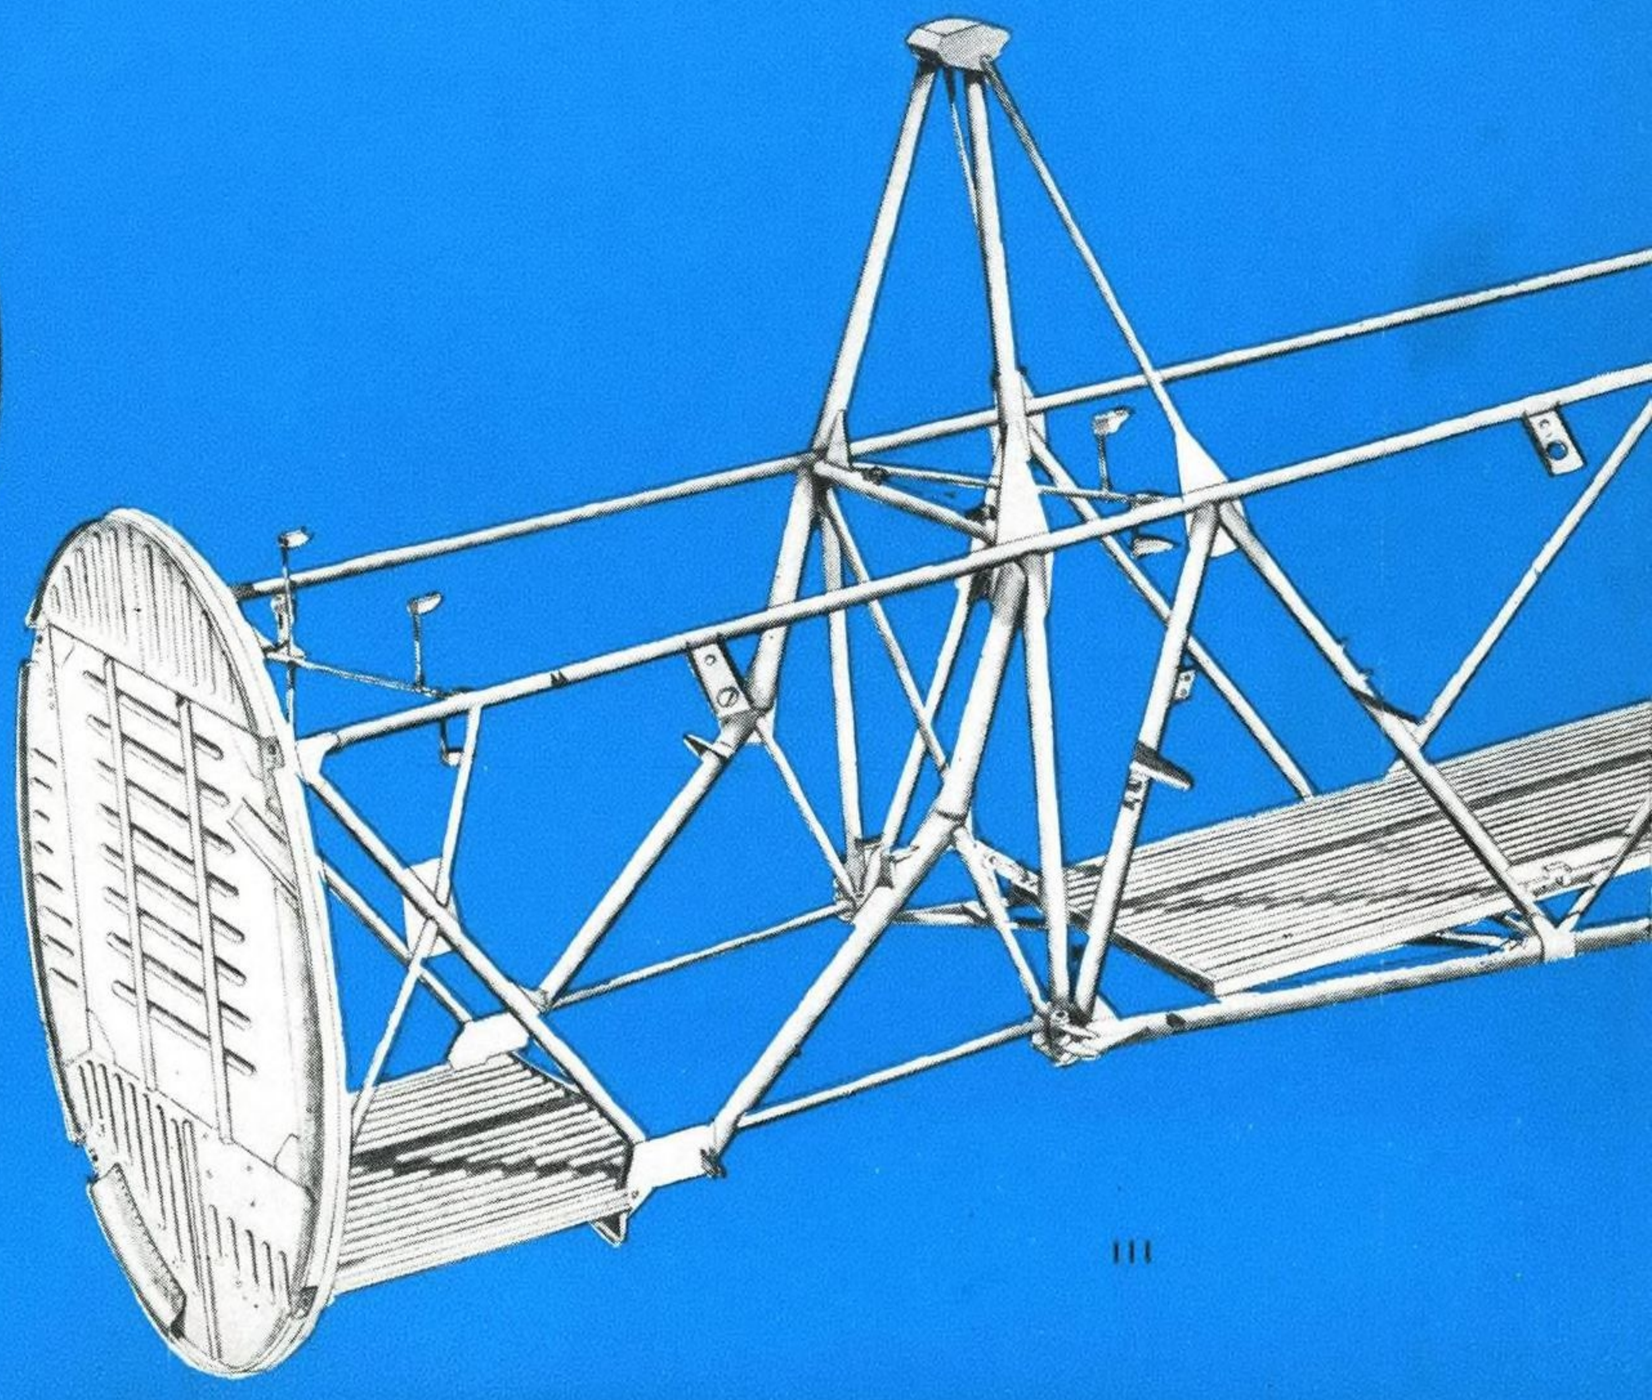

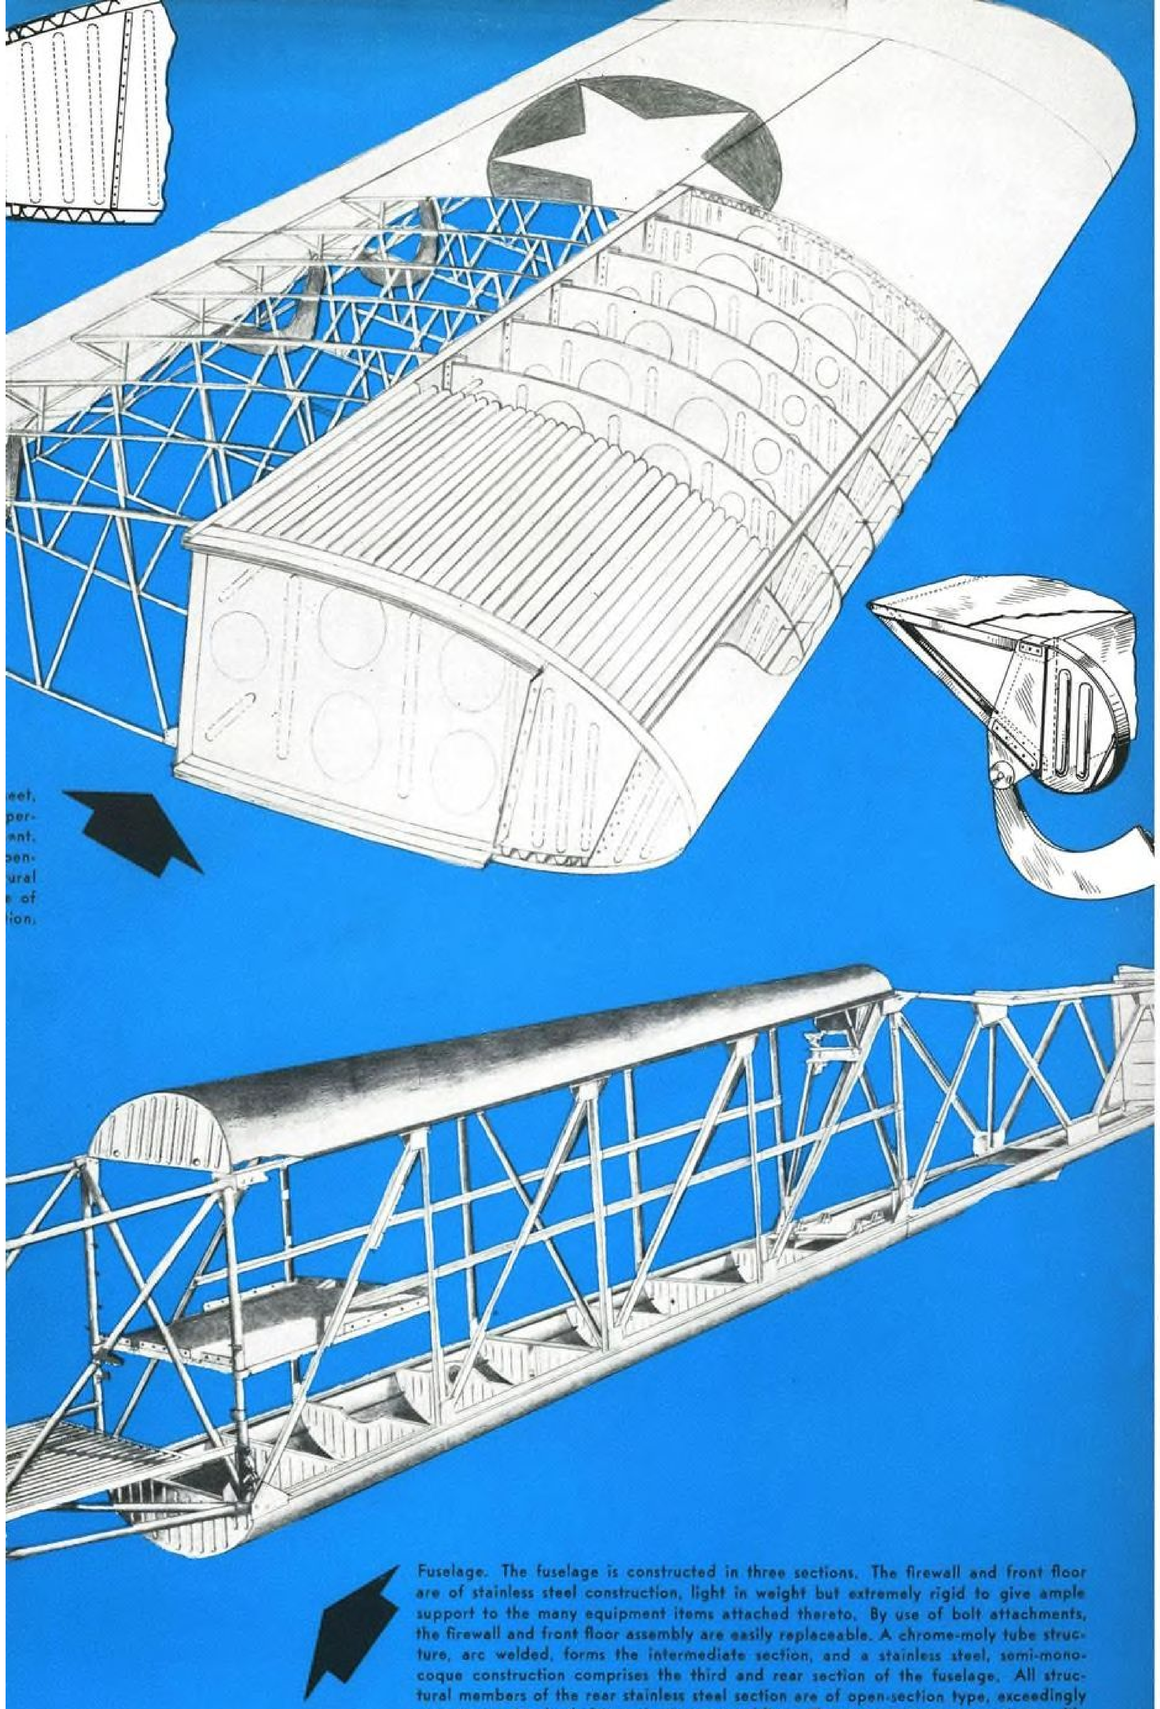

Fuselage. The fuselage is constructed in three sections. The firewall and front floor are of stainless steel construction, light in weight but extremely rigid to give ample support to the many equipment items attached thereto. By use of bolt attachments, the firewall and front floor assembly are easily replaceable. A chrome-moly tube structure, arc welded, forms the intermediate section, and a stainless steel, semi-monocoque construction comprises the third and rear section of the fuselage. All structural members of the rear stainless steel section are of open-section type, exceedingly easy to repair—by bolting, riveting, or welding. These open sections can be readily made by an ordinary hand brake.

J. F. MARTIN, Supt. of Maintenance, American Airlines

FRANK WARE, Asst. Supt. of Maintenance, American Airlines

R. A. MILLER, Supervisor of Overhaul, American Airlines

American Airlines and Continental Air Lines have been selected this year for AVIATION's Maintenance Award. In keeping with the policy established last year, awards are being made to an airline operating over 100,000,000 revenue passenger miles per year (American), and one to an airline operating less than that amount (Continental). The awards are to be presented to the winners at the maintenance meeting of the Air Transport Association to be held in December.

American and Continental Win Aviation's Maintenance Award

THIS YEAR the selection of AVIATION's Maintenance Award winners has been more difficult than ever before. The fact is that the maintenance departments of all the airlines are deserving of special commendation in view of their magnificent work under times of great stress. Despite the reduction of available equipment and loss of highly specialized personnel, airline schedules have altered but slightly and are being kept with amazing regularity. The maintenance function is directly responsible for this achievement.

The engineering and mechanical genius of the maintenance men has come to the fore as a military asset of the first magnitude. Almost every day, in every shop, a new idea, a new method, a new gadget is devised to increase maintenance efficiency and to make quicker turnaround possible. Where more time available is equipment available and more traffic handled, this characteristic initiative counts heavily when needs for carrier space are so real as in time of war.

Other factors, no less important, include a more efficient routing of ships so that maintenance shop load factor is greatly improved; the use of maintenance specialists which reduce maintenance time and simplifies training of new personnel; and rigid adherence to improved personnel safety measures which prevent maintenance delays.

Apart from keeping intact the nation's vital air transport service, which represents a major contribution to the war effort, the maintenance departments have assumed a considerable responsibility in the training of Army mechanics and in modification work. In this latter work, the engineering talents which have consistently been a major factor in air transportation progress are now employed in a war production function and can be measured in terms of distinct war material gains.

With their tasks multiplied threefold, therefore, highest tribute is due these men upon whom so much depends in time of greatest need and in whose efforts we find a symbol of confidence and security.

Typical of them are the maintenance personnel of American Airlines under Joe F. Martin and of Continental Air Lines under Stanley R. Shatto, whose companies are winners of AVIATION's Maintenance Award this year.

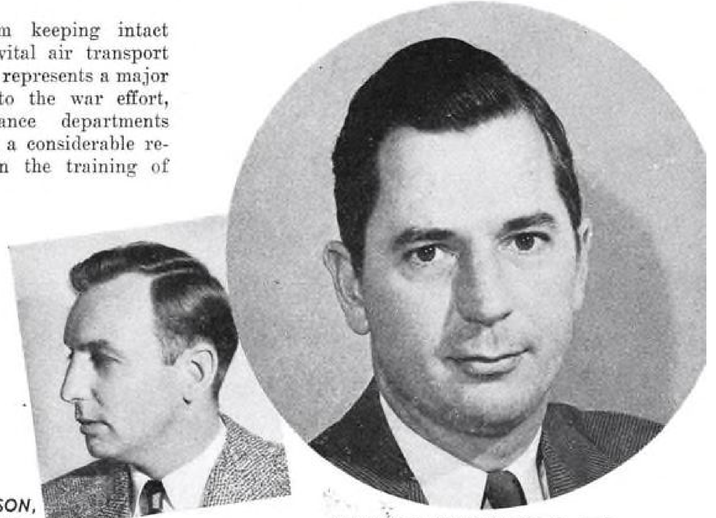

STANLEY R. SHATTO, Vice-Pres., Engineering and Maintenance, Continental Air Lines.

RAY C. JOHNSON, Asst. Supt. of Maintenance, Continental Air Lines.

WORLD CARGO Takes to the Air

Some effects of world-wide operation of transport aircraft on maintenance and design.

By DONALD S. SPRAGUE

Service Manager, Douglas Aircraft Company, Inc.

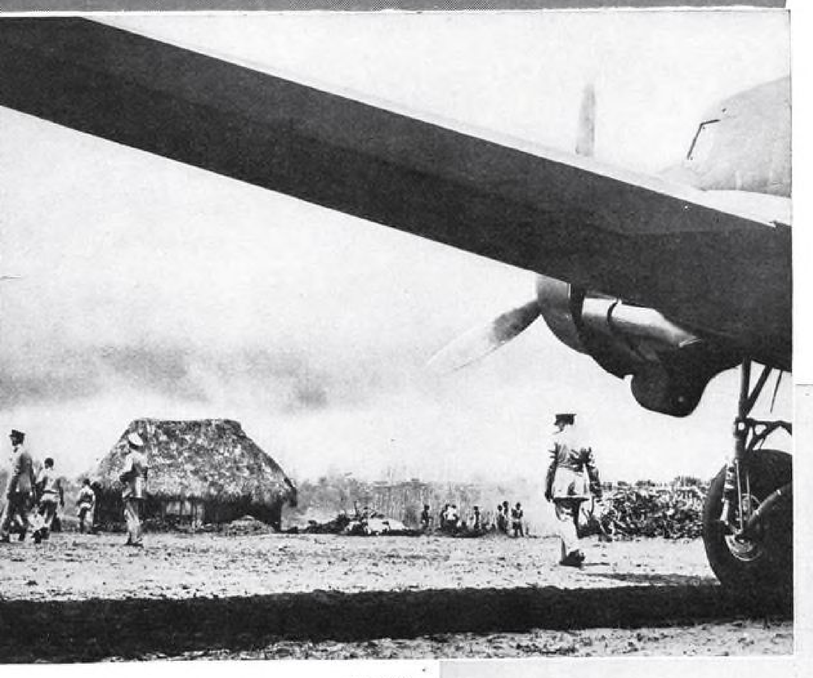

Acme photo

This Douglas C-53 transport and the grass hut in the background provide a striking contrast which is no longer unusual in Africa. The hut stands in the path of an airport runway, and will soon be demolished to make way for construction.

Douglas photo

Contrast this scene at a domestic air base, with clean paved runways, ladders, carts, and service trucks, with the pictures opposite showing typical conditions encountered in Africa. Douglas A-20's are being serviced.

WHEN the United States' entry into the war brought a sudden vast expansion of our air cargo systems, the DC-3 transport was already a familiar sight on the runways of every major airline and air force base in the Americas. Today—carrying the insignia of C-47's, C-49's, and C-53's—her sisters are roaring along airlanes to every continent of the world. Service experience in these new regions has taught many lessons, and our Maintenance Manual now reflects the changes made to cope with African sands, Newfoundland snow, Australian heat, and Alaskan ice.

The outstanding problems to be overcome in providing an airplane for world wide service have arisen from new combinations of the factors of weather and geography. Although there are in the United States localized examples of practically every operational condition to be found elsewhere, we have not before been forced to operate over such large areas, not counties, but continents of sand and heat, or over an area, not a snow covered province but an ice-laden ocean with mud-splashed islands for airports. Because of the scope of the problems that have arisen, it will not be possible, here, to consider each item in great detail. We feel, however, that the following will cover the highlights and may assist ground crews to more thoroughly investigate the items which may affect their work.

The problems inherent to arctic operations have been among the most difficult, although operators in the northern United States have already battled the problem for several years and laid a groundwork of experience. It has now become necessary to incorporate into production the requirements previously applicable to a comparatively limited number of airplanes. Design changes and maintenance practice now affect a large number of transports operating under even more difficult cold conditions. Consequently the Douglas company has been endeavoring to offer maintenance suggestions on transport airplanes already in the Arctic, concurrent with our development of a broader "winterization" program to provide complete cold weather protection for a certain percentage of our production airplanes.

The most immediate points of attention center around the aircraft insulation for the reduction of heat losses due to radiation, and the ventilating and de-icing systems. On the one hand, it is necessary for all ground and flight crews to be thoroughly familiar with the instructions for operating and maintaining the heating systems. At the same time, because of the increased importance of these systems, it becomes necessary for the manufacturer to concentrate even more on simplification of their design and maintenance.

There is now a tendency to draw away from the use of the earlier steam heating units which have been standard for the past several years. Under new operating conditions, which may be expected to be well below zero, condensation and freezing of water have become prohibitive problems, along with the procurement of steel alloys satisfactory for use in the heaters.

The new Stewart-Warner internal combustion heaters are now being used with some success, but it is not clear yet whether or not such a gasoline-flame heater is the final answer to maintaining satisfactory temperatures inside the airplane.

A heating system, using hot air drawn from a muff-type heater around the engine exhaust stacks, is also under consideration. This heater has been used quite successfully by one operator recently, and since such an installation could have considerable advantage from a maintenance standpoint, it is being closely investigated.

Using a hot air system for wing de-icing is also receiving much of our attention. Although the past use of the "balloon-type" rubber de-icer boots has given much satisfactory service, we have found that the effect of extreme cold on rubber, coupled with the requirements of higher speed and performance, justifies our investigation of an alternate method for ice removal, such as heated air passed through the wings.

Arctic maintenance men are now becoming familiar with the new alcohol feed shoe appearing on the leading edges of the propellers of many "winterized" airplanes. These shoes serve the purpose of guiding the anti-icing fluid further out along the blade. Extreme cold has fostered wider use of this additional de-icing device. At the same time, long-range operations at

Assembly and service behind the lines in the desert. Refueling is a matter of emptying hundreds of tins of gasoline but the empty tins come in handy as work stands. Note mechanic in background standing on one.

In the heat of the Middle East, the pause for tea is not only welcome but a downright necessity. Douglas crewmen, James A. Woosley (left), propeller specialist, and Henry Kaehler, in charge of financial matters, are served by a native army mess attendant.

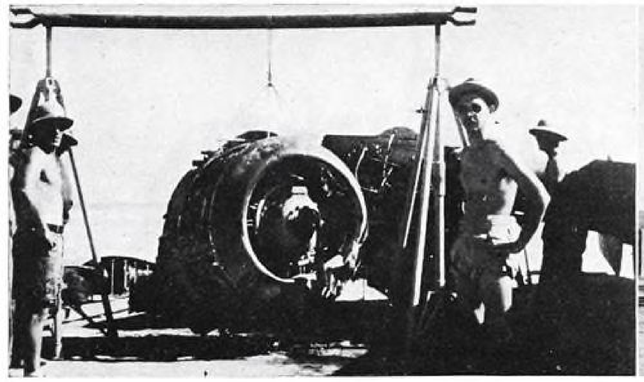

At some of the bases modern equipment, such as the jacks shown here, is available. Douglas crewman, Jack E. Jackson (right), helps salvage a North American B-25. All Douglas men work on all types of ships, regardless of make, in their hunt for useful information.

In the desert downed planes are not always salvaged as easily as this one because mobile cranes and derricks, such as this one, are not always available. In that case, materials at hand plus ingenuity must accomplish the job.

Native crews, such as these two shown checking over a wheel on a "Boston" that is undergoing repairs, have to be trained and supervised. The problems imposed by the desert's heat and sand are augmented by that of available skilled labor. Under such conditions the miracle of American aircraft excellence becomes an even greater one.

Douglas field men train native mechanics, such as these from the Indian Army, to assemble, maintain, service and repair Douglas-built aircraft, such as the A-20 or "Boston" shown in the background. With sand for a floor and blocks of wood for jacks, field service has to be resourceful.

economically low rpm. have reduced the centrifugal forces that assist in throwing off the ice itself.

Incidentally, we have found that these feed shoes require no great maintenance, and with reasonable care, are easily installed. Small nicks or cuts in the rubber may be dressed out with a knife and, although the item should be checked by engine run-up, the balance of the propeller is seldom seriously affected by small pieces cut from the shoe.

Preheating of engines and accessories before starting is a matter of great importance, but one in which much experience has already been gained. Several units are now on the market providing portable hoods to supply warm air to preheat the engines. It has also been found necessary to warm the engine accessories to insure their free operation upon starting.

At this point we might mention that if you have been having trouble with fouling spark plugs and a rough-running engine, perhaps due to using plugs other than those specified for the engine or plugs that are dirty, your troubles have only begun if that combination of engines and "cold-running" plugs is taken into the Aretic. To assure prompt starting and smooth running, it is imperative that your engines have the plugs specified by the engine manufacturers for those operation conditions. This also applies to using correct booster units.

In the past year special lubricants have been developed giving improved service and freedom from freezing. Some of this development has been brought on by earlier instances of lubricants freezing on such installations as control tab drums and gear boxes, brought about by extreme cold, or high altitudes. Lubricants are now available giving satisfactory operation with temperatures in the region of −75 deg. F. and particular care should be taken to insure that the proper lubricants have been installed, particularly if the airplane is a new arrival in cold climate. These special greases are now regularly installed in all production airplanes which are given "winterized" treatment in advance.

Many of the operators are already acquainted with the activities of Douglas' experimental research "cold-room," and much of the data leading to "winterization" changes has been developed or verified in this laboratory.

We are now lubricating such control bearings as tab drums, gears and gearboxes with grease to conform to Army Specification AN-G-3. Beacon M-285, product of Standard Oil of New Jersey, has been found satisfactory for extreme cold weather operation. Douglas practice is to identify such sealed bearings with cold weather grease by blue paint on the seal-disks. On units carrying heavy bearing loads, such as main landing gear wheel bearings, a medium, fiber-base grease is used conforming to Specification AC 3560.

Oil dilution systems have become a standard part of the provisions for cold weather operations. When it is anticipated that an engine will be very cold at the time of re-starting, gasoline is allowed to run into a "hopper" within the oil tank for a few minutes prior to stopping the engines. In subsequently starting the engine, this diluted oil is fed first to the system, providing more immediate lubrication of engine bearings by avoiding the sluggish action of congealed oil of the viscosity necessary for normal operation.

With this principle in mind, maintenance men and operators should remember not to leave the oil dilution switches "on" for a longer period than is recommended in the maintenance manuals, as this would over-dilute the oil with a possibility of a dangerous loss of lubrication through the presence of *too much* gasoline.

Attention has been given to insulating pipelines carrying oil by lagging them where they may be subject to freezing temperatures. "Winterized" airplanes can often be most easily recognized by the lagging around the oil tank, as located in the engine nacelles on the C-47's and the C-54's.

Experience has shown that lagging of lines forward of the firewall is unnecessary, and may even present adverse conditions.

Maintenance men will bear in mind the item of the difference in thermal expansion of various methods and materials used in aircraft construction. This is a problem which Douglas has had to consider in "winterizing" its airplanes and one which may sometimes explain unusual instances of looseness or interference on assembled units. Since the coefficient of thermal-expansion for the usual aluminum alloys runs roughly 15 to 30 percent higher than for steel and brass alloys, the influence of extreme changes of temperature on dural will be correspondingly greater than on such other metals.

This accounts for the necessity for specialized cable rigging charts applicable under extreme cold weather operation. Should an airplane whose cables have the proper tensions under cold weather conditions be shifted to a temperate or tropical region, it will be noticed upon rechecking cable tensions that the loads are high and the cables must be slackened a bit to prevent excessive pulley wear or cable fraying. Ths is obviously due to the increase of

temperature of the aircraft: The aluminum structure has expanded more than have the steel cables, thus giving a greater tension in the cables.

The effect of thermal-expansion also contributes greatly to the performance and maintenance of shock-absorbing oleo struts. Instances have been noticed where an oleo strut had the proper inflation while the airplane was standing in a warm hangar. When the plane was subjected to an extreme temperature drop on the field and in flight, the contraction of the air within the oleo allowed it to go "flat," eliminating its shock-absorbing function.

The deteriorating effect of extreme cold upon rubber is also influencing modern design, and we may endeavor in the future to cut down the use of rubber bungees in favor of mechanisms with a longer life under extremes of temperature.

The presence of mud and slush, although by no means limited to aretie operations, is of particular significance under those conditions. Considerable attention by maintenance men is necessary to insure that parts subject to the spray of mud and water are kept as clean as possible to cut down the possibilities of mechanisms becoming dirt-clogged or frozen. We have found that a coating of low temperature greases and oils will improve this condition. This maintenance item applies especially to the nacelles, where there is a danger of blocking the action of landing gear safety latches and warning light switches.

The above has dealt with problems particularly accentuated by cold weather operations. Obviously, these problems are not limited to cold weather, and on many of them a complete reversal of temperature into the tropic zones brings on a contrary condition which is just as much of a headache to maintenance men and to the manufacturers.

At the time when tropical operations became a major part of our air cargo system, there was considerably less experience available than was the case with arctic operations. With some, the difficulties of tropical operations were largely centered around ground handling and maintenance under sun temperatures running up to 170 deg. F. and 180 deg. F. and shade temperatures between 120 deg. and 140 deg. Even more of a problem than the temperatures are the sand and dust storms against which airplanes on the ground have to be safeguarded or serviced.

The first maintenance move found necessary was in combating sand storms. In United States operations, we have generally been able to skip areas of desert, spotting our airports at major towns with adequate protection and

(*Turn to page* 331)

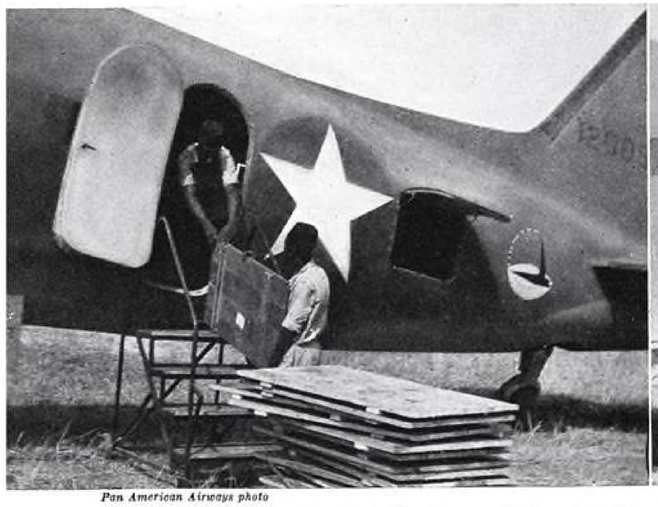

Pan American Airways photo

Douglas C-53 of the U.S. Army Air Transport Command takes on a load of prefabricated lumber for delivery to an advanced base. Vast amounts of men and materials have been moved by air throughout North Africa.

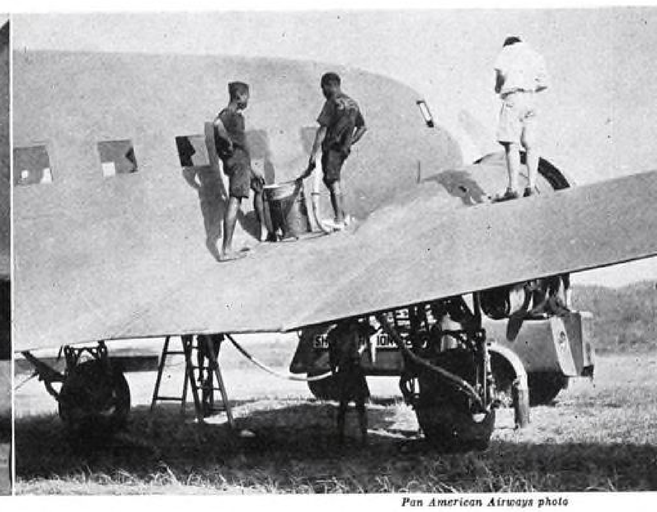

Pan American Airways photo

Manpower has been one of the most serious problems encountered in African transport operations. However, natives were put to work, given training, and many proved capable of handling many jobs.

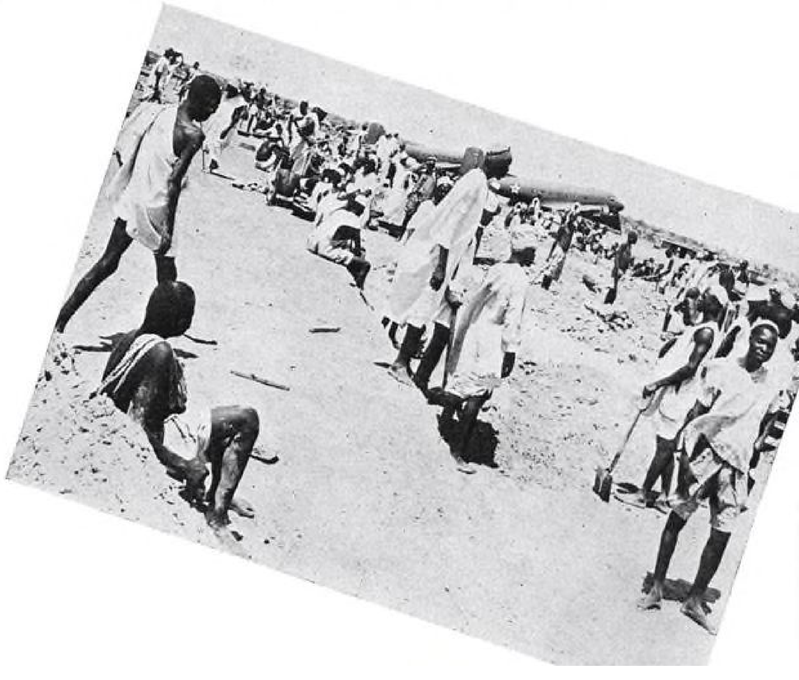

Acme photo

Hordes of natives are engaged in building airports in jungles and deserts of Africa. Despite primitive methods and lack of modern machinery, prodigious construction feats have been accomplished. Note Douglas transports in the background.

Back into blue over Iceland—again airworthy and fightworthy! Damaged in forced landing on rugged beach, this "Hudson" was quickly dismantled, taken by float to freighter, shipped to near-shore overhaul station, speedily repaired and reassembled by field maintenance crews.

Maintenance of thousands of warplanes depends on steady flow of required parts. Completely equipped trailer units—like this one of Technical Training Command—carry mockups of aircraft operating systems, circulate from squadron to squadron.

Fighting the AIRCRAFT MAINTENANCE War

Score upon score of bases, both permanent and mobile . . . myriad parts and equipment . . . air transport to take then anywhere . . . trained personnel throughout to gather, distribute, and apply them rapidly, accurately. A fantastic order—but the ASC is filling it!

By REAGAN C. STUNKEL

General Service Manager, Lockheed-Vega Aircraft Corporation

THROUGH GRAPHIC "before and after" perspectives, the tremendous development of wartime aircraft maintenance may, in some measure, be visualized. And how amazingly the picture has changed since that "before"!

Just a month prior to Pearl Harbor, I prepared an article titled The War and Aircraft Maintenance (AVIATION, December, 1941) and little did I, or anyone else for that matter, realize then how strikingly soon the presumptions of that study would come to pass.

Then I talked of 12,000 airplanes—but today we are on the home stretch to a 1942 production goal of nearly five times that figure! Surely, none but the very best informed can begin to gage the utterly fantastic amount of planning and work required to keep our gigantic air armada in condition and ready for combat. Certainly the biggest technical job of this war is the colossal task of supplying and maintaining our warplanes.

Regardless of how outstanding its performance may be or how ruggedly it may be constructed, an airplane is only as good as the maintenance it receives. Our index of production is not the factor that determines how many aircraft can be placed in combat. That factor can only be calculated by an analysis of the number of aircraft in condition to fight—and the fighting condition of an airplane depends entirely upon how well it has been maintained.

Aircraft maintenance has undergone a vast change from both the air-line and military maintenance we knew a few years ago. Granted, the same fundamental operations must be performed now as then. But now, instead of maintaining a few hundred aircraft within our continental limits, we must maintain thousands of them in the heat of Libya, the jungles of the Solomons, or the snows of northland bases. This global war, evil though it may be, has packed years of experience into the space of a few months.

Where a maintenance problem in the past was the subject of careful deliberation and experimental work involving weeks, we must now make decisions quickly—and act. Our very salvation depends on action. And an amazing truth is noted when we compare the results of these fast decisions with those past results founded in careful deliberation: Our wartime results are just as good now as they were then. Perhaps it is a success born of our knowledge that besides acting fast, *we must be right the first time.* The planes must be both airworthy and *fight*worthy!

In writing of maintenance last year, I named four cardinal necessities of successful military aircraft maintenance: (1) Maintenance bases and equipment, (2) parts supply and distribution, (3) trained personnel, and (4) transport. There are, of course, multitudinous ramifications surrounding each of these requirements which, drawn in detail, would fill volumes. These needs were noted before Pearl Harbor. Now, a year later, it is interesting to note the rapidity with which the requirements for each of these major maintenance necessities have been fulfilled.

Here's an example of the speed with which Army Air Forces maintenance bases have been established:

On Dec. 3, 1941, the AAF asked the Lockheed Aircraft Corp. to establish a maintenance and overhaul base in a foreign country. This base was to be

(*Turn to page* 344)

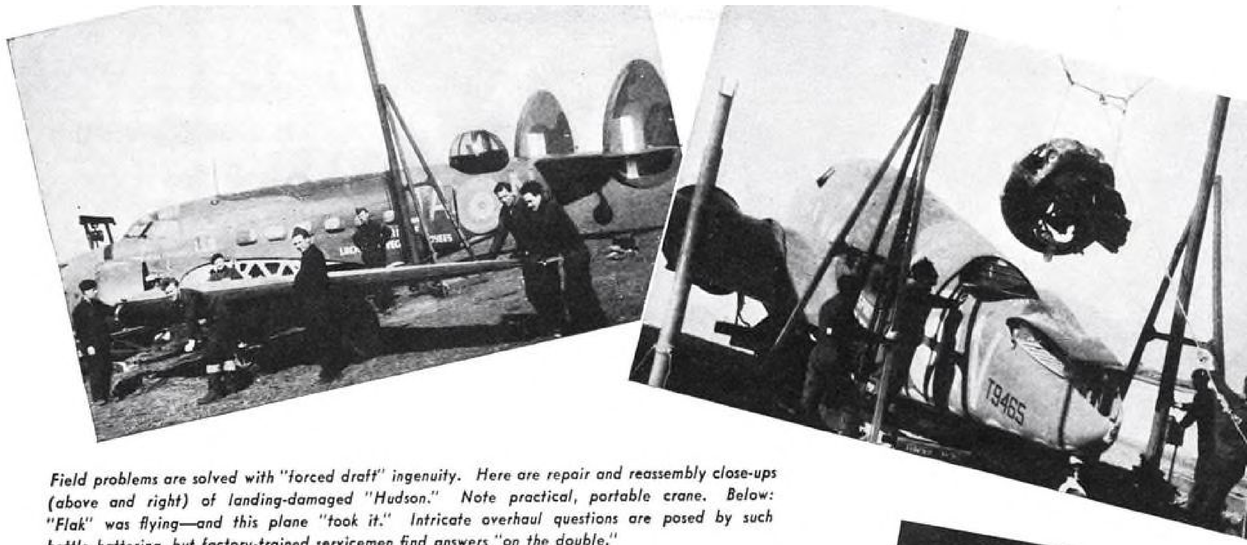

Field problems are solved with "forced draft" ingenuity. Here are repair and reassembly close-ups (above and right) of landing-damaged "Hudson." Note practical, portable crane. Below: "Flak" was flying—and this plane "took it." Intricate overhaul questions are posed by such battle battering, but factory-trained servicemen find answers "on the double."

Adapting Assembly Line Techniques To Engine Overhaul

Chicago & Southern shop handles AAF training plane engines from eight states; women mechanics among civilian employees relieving Army men for combat plane work.

ASSEMBLY LINE TECHNIQUE is being used in the Army Air Forces motor repair depot now functioning in Chicago & Southern Air Lines' shops at the Memphis Municipal Airport.

This depot handles Army training plane engines from a territory bounded by Florida, North Carolina and the Mississippi River, taking in eight states. Several of these repair stations have been set up throughout the country to relieve the regular Army depots of this work and allow them to concentrate on engines for combat planes.

Civilian mechanics, a few of whom are women, are employed on this project and are under direct supervision of both Chicago & Southern and the Army. The fact that training plane accidents due to motor failure are practically nil attests to the thoroughness of their work.

"Chicago & Southern has developed a production line that is now ready to 'click'," according to Capt. Richard E. Fly, Army Air Forces Control Depot representative, through whose office the work is handled. "This is due both to good management and to having good men working on the project. We started this work recently on a small basis and now we are ready for production—to get the maximum number of engines off the assembly line each day. Our goal is to handle more than 100 engines per month."

A number of mechanics working on the project were trained at the National Defense School, and more now in training there will be employed. As production increases, more and more women will be employed to do this mechanical work, Capt. Fly has reported.

Among the outstanding achievements in connection with this repair depot is the development of a portable motor test stand which saves approximately one man-hour of work per engine. It is the first such test stand of its kind in the United States, and was designed and built under the supervision of W. L. "Doc" Anderson, C & S superintendent of engineering.

After the engine is assembled, it is bolted to the portable test stand and rolled to the specially built test house where the stand is locked into place. Each motor is test run for 5 hr. and 45 min., during which time it is constantly checked by instruments and its performance recorded.

Every 500 to 600 flying hours, each training plane engine must receive a major overhaul, consisting of completely disassembling the engine, cleaning it and inspecting each of its many parts for wear or defects. Worn or defective parts are replaced and the engine is put together again along the assembly line. After the test run it is crated and shipped.

Both the engine overhaul "assembly line" and the test cells are housed in specially built quarters entirely separate from Chicago & Southern's regular maintenance department.

Assembling a Continental R-670-5 engine by production line methods gives speed through which the base expects to overhaul up to 100 engines per month. Use of civilian employees, including women, under Chicago & Southern and Army supervision relieves Army Air Forces mechanics for concentration on combat planes.

Chicago & Southern Air Lines photos

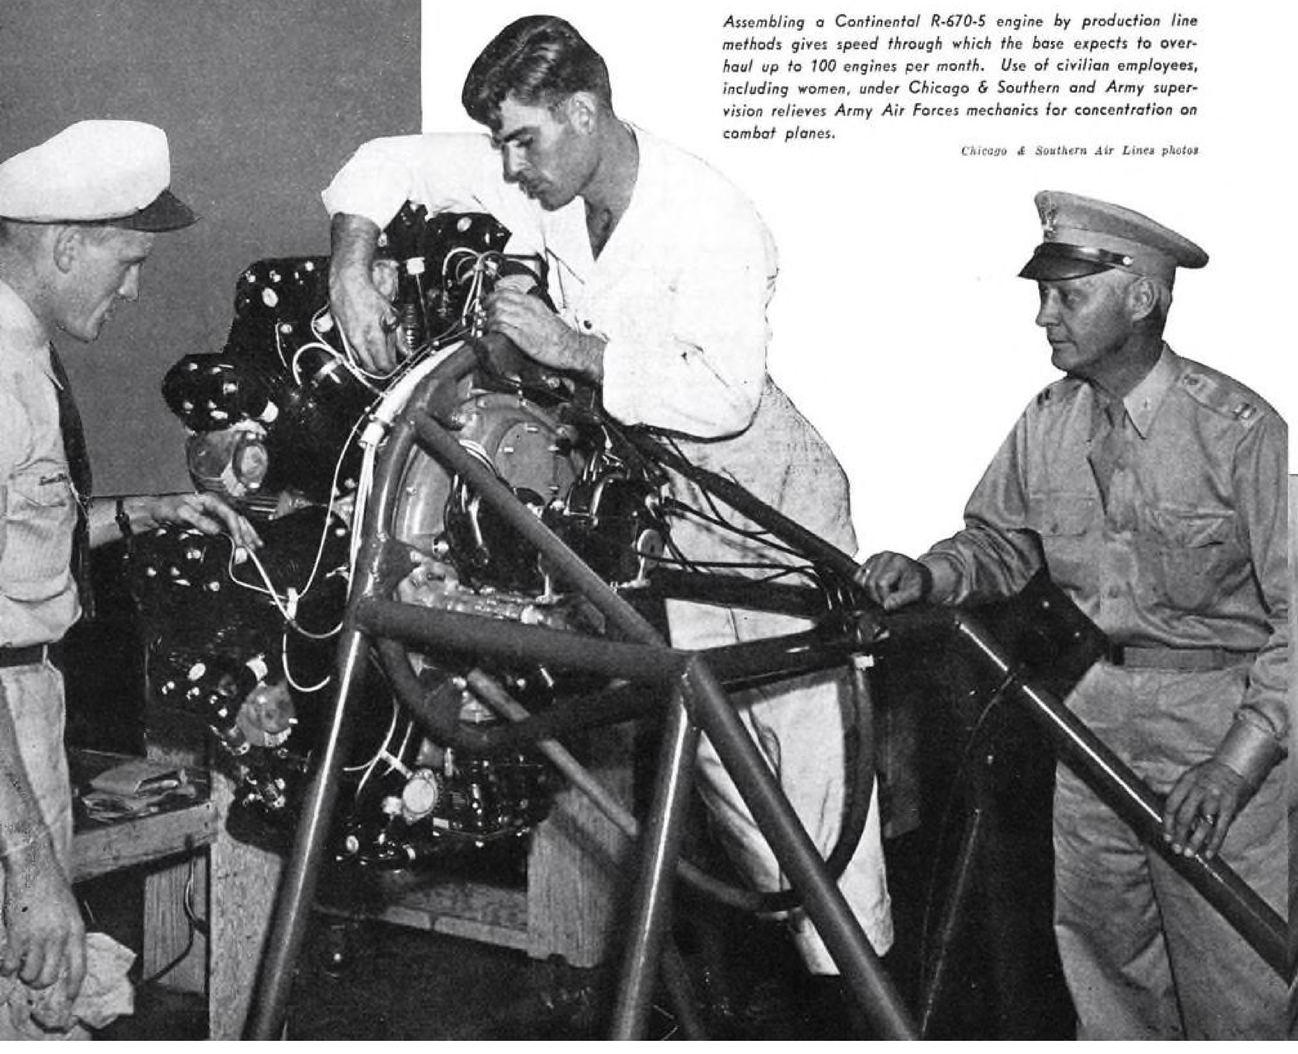

An outstanding development at the engine repair base is the portable engine test stand designed by R. L. "Doc" Anderson, superintendent of engineering, which saves approximately one man-hour per engine. The assembled engine is bolted to the stand, which is then moved to the specially built test house and locked in place.

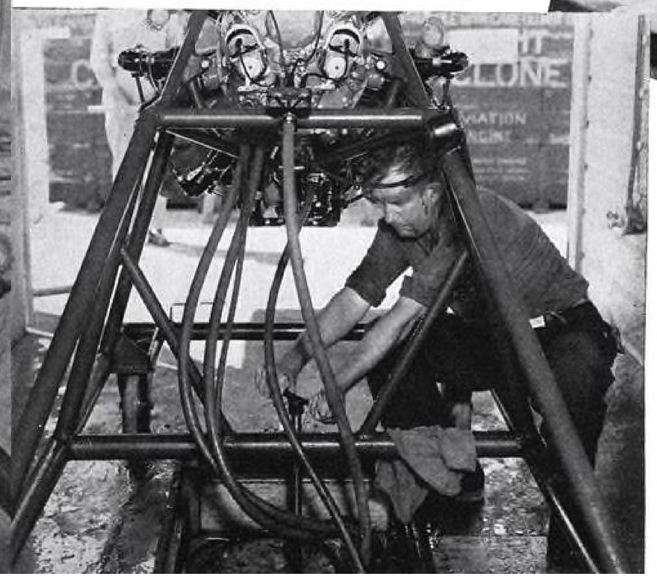

Continental engines from Army Air Forces training planes reach the Chicago & Southern repair depot by truck in special crates used for shipment both ways. Here Henry Whitehorn, C. & S. mechanic, supervises crating of an engine which has just finished its test run after complete overhaul, ready to go back into service in an Air Forces training craft.

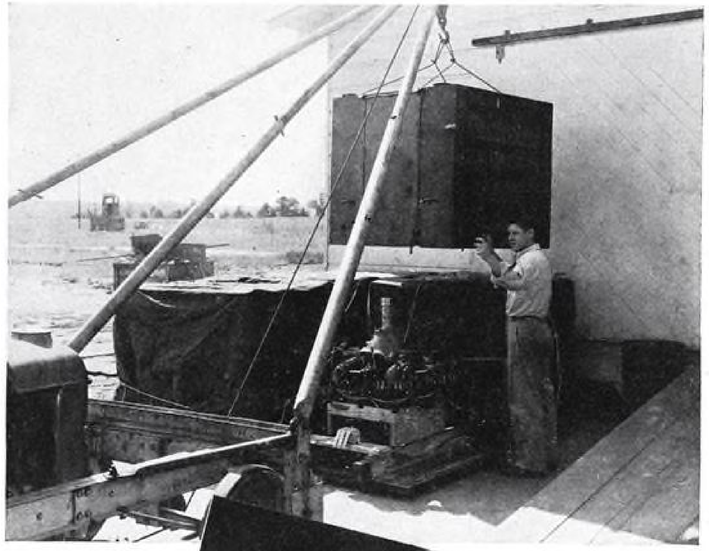

The Army Air Forces engine repair depot at Chicago & Southern Air Lines base uses production line techniques in overhauling training plane engines from Army schools in eight states. Capt. Richard E. Fly, AAF representative, watches a cylinder specialist at work on one section of the "line." Success of the technique "is due both to good management and having good men working on the project," Capt. Fly reports.

O'er the ramparts we watch

LOOKING down now on our embattled America is the spirit of the undaunted men who guided this nation through the perils of the past.

They see our mighty republic, nurtured by liberty and union, menaced anew as the guardian oceans shrink and the ramparts we manned become targets instead of barriers under the speed and power of attack from the air.

Once, all that courage needed was a foothold for the defense of its homeland – by protecting its harbors, rivers, mountain passes and vital points, it could protect the whole.

Then the sinking of the Spanish Armada ushered sea power into full reign and, spread and fed by strategic bases like Hongkong, Singapore, Gibraltar, Malta, Alexandria and Capetown, sea power was made to mean world command.

NOW as in the twinkling of an eye all this is changed!

Land power and land barriers however formidable are hurdled and overcome. Sea power with all its far-flung majesty is threatened. The third and decisive dimension – the ocean of the sky – is mastered by the plane, overleaping on land and sea all the barriers of the past.

So the ramparts *we* watch are overhead, and our vigilance must comprehend not just the curve of our shores but the arch of our heavens; and the one freedom crowning and determining all other freedoms for ourselves and our children is henceforward the freedom of the skies!

We must be strong there. Nay, we must be invincible, dominant! Time, now telescoped by speed, requires it. The days of grace we once knew by virtue of the slow pace of armies and weeks-long distances of the seas are briefed by the planes to hours.

To preserve America *we must make her first in the air* – prepared in advance to defend and attack at any point, her strategy mature and universal, her youth trained, ready, dauntless, their equipment and tactics the very perfection of the newest art in war.

We must be air-minded, fair-minded, world-minded now – girt in spirit and strength to the new leadership destiny is placing in our keeping – justifying our matchless future place and responsibility through justice to all.

IN the light of these truths Goodyear is proud to be producing both complete airplanes and airships, as well as wing, tail and cabin subassemblies, control surfaces, wheels, brakes and bullet-puncture-sealing gasoline tanks and fuel lines for many of America's most famous fighter and bomber aircraft.

America *must be first in the air.* Before any other duty Americans must provide the means and weapons to put her there – else neither we nor you nor any of our people nor their children will ever be first in anything again.

AMERICA MUST BE FIRST IN THE AIR. *Unless and until America is the most powerful nation in the air, our safety, our freedom, and our standard of living will not again be what they have been in the past.*

P. W. Litchfield

Actual work on late model B-25 bombers, under the direction of two instructors, is familiarizing two groups of AAF mechanics with the jobs they will do in the field. To simulate field conditions, the men are not permitted to use the time- and labor-saving mobile cranes, hydraulic hoists, and other equipment commonly in use on all modern American airports. Instead they do it the hard way, as they will have to in far-flung corners of the earth.

Frank Lyons (left), field service manager for North American Aviation, Inc., gets a personal report on the performance and service problems encountered by P-51 "Mustang" fighters in the European combat zone from Phil Lagarra, the company's chief representative in London. Lagarra had just returned from his post for a short stay at the home plant to amplify his field reports and be brought up to date on new developments for the "Mustang."

Bringing Field Experience Back to the Plant

Three-fold program coordinates manifold jobs of North American Aviation's field service representatives to insure maximum performance of planes on all fronts.

By FRANK H. LYONS
Field Service Manager,
North American Aviation, Inc.

AMERICA'S WIN-THE-WAR production program, calling for an enormous output of aircraft, has made it necessary for North American Aviation and the aircraft industry in general to expand manufacturing facilities almost beyond conception. Yet in spite of the thousands of airplanes being built in this nation, the tremendous effort put forth to get them into service would be a futile gesture if they were not kept in flying condition. North American therefore established a unit within its organization whose sole aim and responsibility is to coordinate operational and maintenance information between the home plant and the pilots and mechanics operating and servicing B-25 ***Mitchell*** bombers, P-51 *Mustang* fighters, and AT-6 combat trainers in the field. Thus was born the field service department.

An airplane on the ground is of no value in fighting so in order to keep our airplanes in the proper operating condition three methods are employed:

First, by an on-the-spot educational system, as practiced by the company's highly specialized and thoroughly trained group of 40 field service representatives who are assigned to posts throughout the world.

Inside and outside, from propeller hub to rudders, AAF mechanics are taught by North American experts how to service, adjust and repair airplanes produced by the company and to which the men will be assigned in the field. Their education will be continued at the fronts by other company experts of the field service department who will bring them up to date on late developments and send back to the plant the discoveries these AAF men make that are of value.

Second, by a factory training program for the United States Army Air Forces personnel.

Third, by the preparation of flight, service, and repair manuals, which are used by the pilots and mechanics all over the world.

An extensive educational program is provided for our field service representatives, who, during the past twelve months, have traveled more than 250,000 mi. and checked up on our airplanes in service in 22 countries. Their training recognizes that their job is twofold: (1) As just mentioned, to give on-the-spot information on the proper technique for operating, servicing and repairing North American planes, and (2) to report their findings to the home office.

A close watch for any and all signs of trouble is maintained by each man. Operation and service problems raised by climate such as the high temperatures of the desert, the low temperatures of the Aretic, the effects of humidity in the jungle, or of sand and dust, mud, ice, bugs or vegetation—all of these are reported to the home office. These reports are indexed and forwarded to the various engineers responsible for the design of the airplane and, if the same type of difficulty is reported from different combat zones, steps are immediately taken to improve the part in question in order to prevent recurrence of the trouble in planes on the production line.

This procedure has proven extremely helpful in keeping planes we manufactured in the air, a fact emphasized by reports on their excellent performance in New Guinea, Egypt, Burma, and over other battle fronts throughout the world.

The men selected as field service representatives are picked from among employees in our plants who qualify on the basis of their knowledge and experience with our planes. The first requisite is that men be thoroughly familiar with North American airplanes. We likewise prefer that they have a background of engineering experience. This is desirable as our airplanes do get hit by enemy bullets and, since these

(*Turn to page* 323)

WOMANPOWER

In Airline Maintenance Shops

By CHARLIE N. (Jimmie) JAMES
Vice-President, Operations, Western Air Lines

Mrs. Sally DeLong, Western Air Lines' "draftsman", and wife of a research engineer, discusses plans for passenger facilities changes with Russell J. Smith, manager of reservations service in Los Angeles, as A. Letcher Seamands (center) chief passenger agent, looks on. Other women are being trained for mechanical jobs, as electrical and instrument technicians, radio operators, and reservations clerks. The company's news bureau has long been conducted by women who do all phases of its work including photography.

SINCE LAST DEC. 7 when the United States was plunged into war, one definitely new word has emerged in airline maintenance. That word is "womanpower." No longer is the role of women confined to that of hostess or ticket agent. In our current maintenance department expansion program, now nearly completed, provisions have been made for maintenance crews we expect will be 50 percent women.

In less time than it takes to tell it, the nation's airlines answered Uncle Sam's call with equipment they had on hand and began a new era in aviation—the era of cargo liners, supply ships, of vast freight transportation by air, and, of full scale use of women in all branches of the service. Flying military cargo ships to the fighting fronts puts domestic airlines in a dual role, for they still are operating as carriers of priority and civilian passengers, mail and express, to every vital industrial center of the nation. Naturally, this dual load has called for expansion, particularly of maintenance facilities. These, like all other facilities of war, have to be on a production basis.

To meet this steadily growing problem of maintenance of our equipment, Western Air Lines put draftsmen and architects to work on a proposed addition to existing maintenance housing and is now completing the structure to effect isolation for the maintenance department's shops. Further,

There are a number of jobs around maintenance shops that can be done as well or better by women than men. At Western Air Lines special facilities are being established to permit fullest utilization of women for maintenance work.

we have set up a hiring and training program that will provide 100 mechanics during the year.

Because it is anticipated that about 50 percent of those 100 mechanics will be women, the new engine overhaul building, for example, is to be equipped with facilities that will permit their use by women. Heavy machines will be mounted on rollers and casters, special safety devices will protect these new mechanics in ways it was not necessary to afford protection before, and new rules have been adopted, among them one requiring women mechanics to wear turbans. Counterbalancing of mobile tools will be a common practice.

Rest room facilities are being provided and particular attention has been paid to shadow-free lighting, to reduce worker tension and strain to the lower limits of women workers. Wherever possible we are profiting from the experience gained by the aircraft manufacturers, who have used women in a greater variety of mechanical jobs than any other industry with which we are familiar.

Already Western has women in its apprentice mechanics classes and some have been assigned to jobs rarely before performed in airline maintenance shops by women. One, Mrs. Mary Russell, for example, in addition to her daily classes, is doing efficient work cleaning spark plugs. Another, Mrs. Agnes Morton, works on instruments. Still another,

(*Turn to page* 343)

Trainees Dorothy Sawyer (standing), and Katherine Robinson practice radio in the operations department. This department is now entirely staffed by women.

Mrs. Mary Russel, whose husband and five brothers are all mechanics, is in the mechanics training classes and gets accustomed to the work she will do by starting actual work cleaning spark plugs.

Leo Smith of the engine maintenance staff explains engine parts and functions to two women trainees. One in overalls (right) will do actual work under Smith's direction while the other takes notes. Next session the women will exchange places as note-taker and worker.

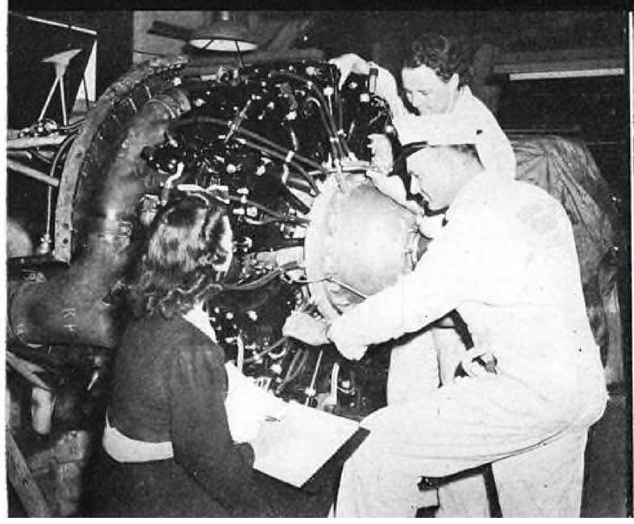

Mrs. Agnes Morton, wife of a Lockheed Aircraft Corp., instrument technician, is an apprentice instrument technician at Western Air Lines. During her training days she will divide her time between the classroom and the workbench.

Municipal Airport, Jacksonville, Florida, showing National Airliner and U. S. Army Cargo Ships operated by National. *Texaco Aircraft Engine Oil* is used.

SPEEDING THE WAR EFFORT . . .

Throughout the Great Southeast

PROVIDING 2,000,000 seat-miles a month for Army-Navy personnel, war contractors and the general public . . . Flying U. S. Army Cargo Ships some 4,500 miles a day . . . Such is National Airlines War Effort . . . bringing war plants throughout the Southeast within a few hours of each other.

For this flying, so largely in the interests of our National Government, National Airlines uses *Texaco Aircraft Engine Oil,* a preference reflected by the entire industry, since:

More revenue airline miles in the U. S. are flown with Texaco than with any other brand.

The outstanding performance that has made Texaco FIRST with the airlines has made it FIRST in the fields listed in the panel.

Texaco users enjoy many benefits that can be yours. A Texaco Aviation Engineer will gladly cooperate in the selection of Texaco Aviation Products, available at leading airports in the 48 States. Phone the nearest Texaco distributing point, or write The Texas Company, *Aviation Division,* 135 East 42nd Street, New York, N. Y.

THEY PREFER TEXACO

★ More Diesel horsepower on streamlined trains in the U. S. is lubricated with Texaco than with all other brands combined.

★ More locomotives and cars in the U. S. are lubricated with Texaco than with any other brand.

★ More revenue airline miles in the U. S. are flown with Texaco than with any other brand.

★ More buses, more bus lines and more bus-miles are lubricated with Texaco than with any other brand.

★ More stationary Diesel horsepower in the U. S. is lubricated with Texaco than with any other brand.

TEXACO Lubricants and Fuels
FOR THE AVIATION INDUSTRY

TUNE IN FRED ALLEN EVERY SUNDAY NIGHT—CBS ★ HELP WIN THE WAR BY RETURNING EMPTY DRUMS PROMPTLY

Aviation's Maintenance Notebook

For Easier and Swifter Assembly

This jig was built by Eastern Air Lines' maintenance department for complete assembly of Douglas DC-3 landing gear units prior to installation on planes undergoing overhaul. Use of the jig eliminates congestion around the engine nacelle, thus saving considerable time in getting planes back on the line. Of welded construction, it was built almost entirely of the type of material found "outside in the junk pile."

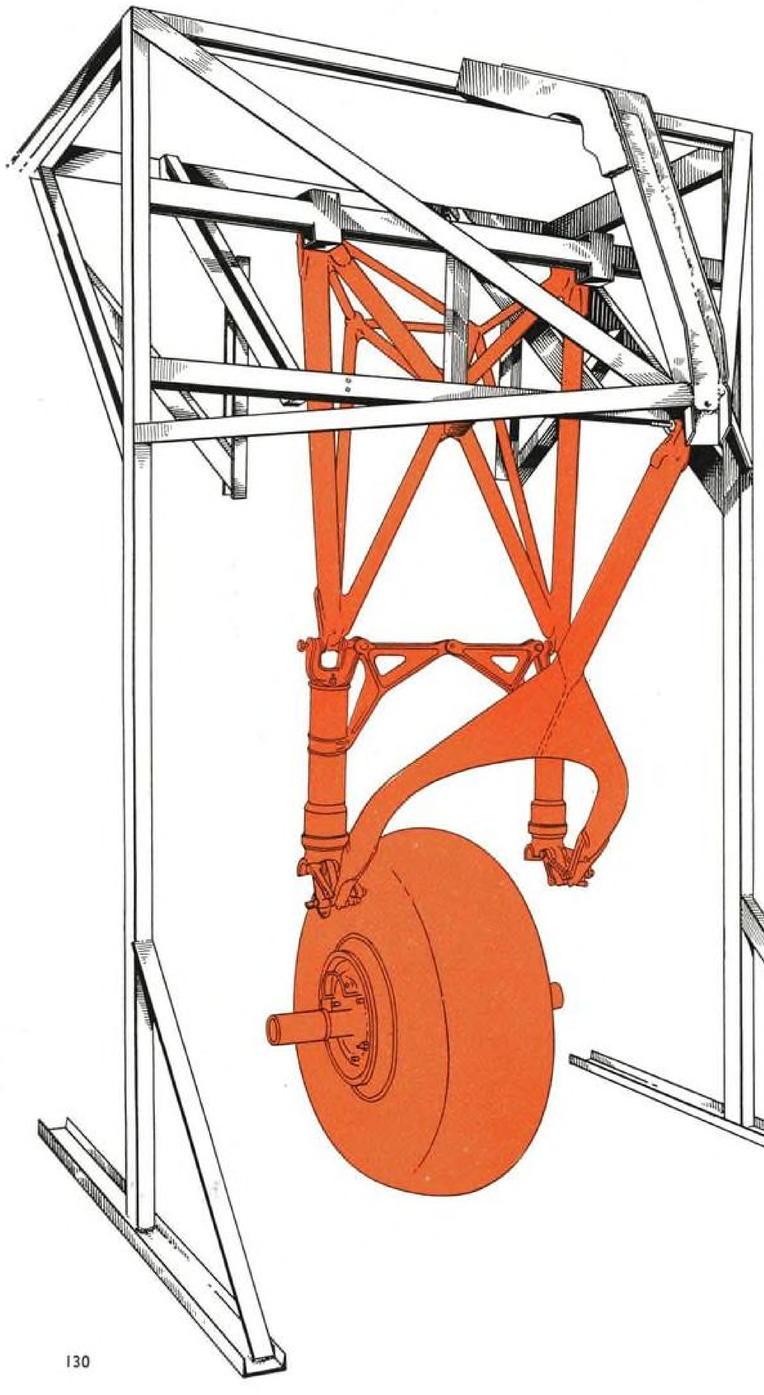

Subassembly Fixture

For convenience in keeping complete landing gear units together during reassembly, this wheel assembly fixture is built into the landing gear assembly jig, being attached to the upright member just to the left.

Photo by W. F. Gerecke

One-Man Mobile Platform

Maintenance mechanics at outlying Pan American Airways bases have found this mobile one-man ladder invaluable in quickly reaching high, inaccessible parts of the *Clippers*. The work platform, complete with guard rails, can be set at any height by means of the crank at left, placed at convenient working height. Note how all four castors can be swung into position for moving the ladder by moving the single lever seen below the crank.

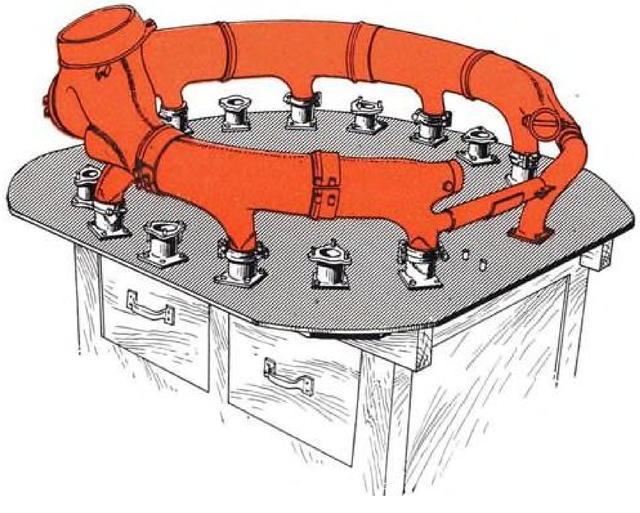

Collector Ring Aligning Jig

This two-purpose jig was designed and built to insure accuracy and speed assembly of exhaust collector rings by the TWA maintenance department. Use of the jig makes possible the proper fitting of all sections of the collector ring before it is installed on the engine. Thus, defective sections may be replaced and properly fitted to the ring and stub stacks prior to installation. With this set-up, personnel assigned to such work can furnish completed rings to the engine build up crews, saving congestion around the engine being built up and providing standardization of the units.

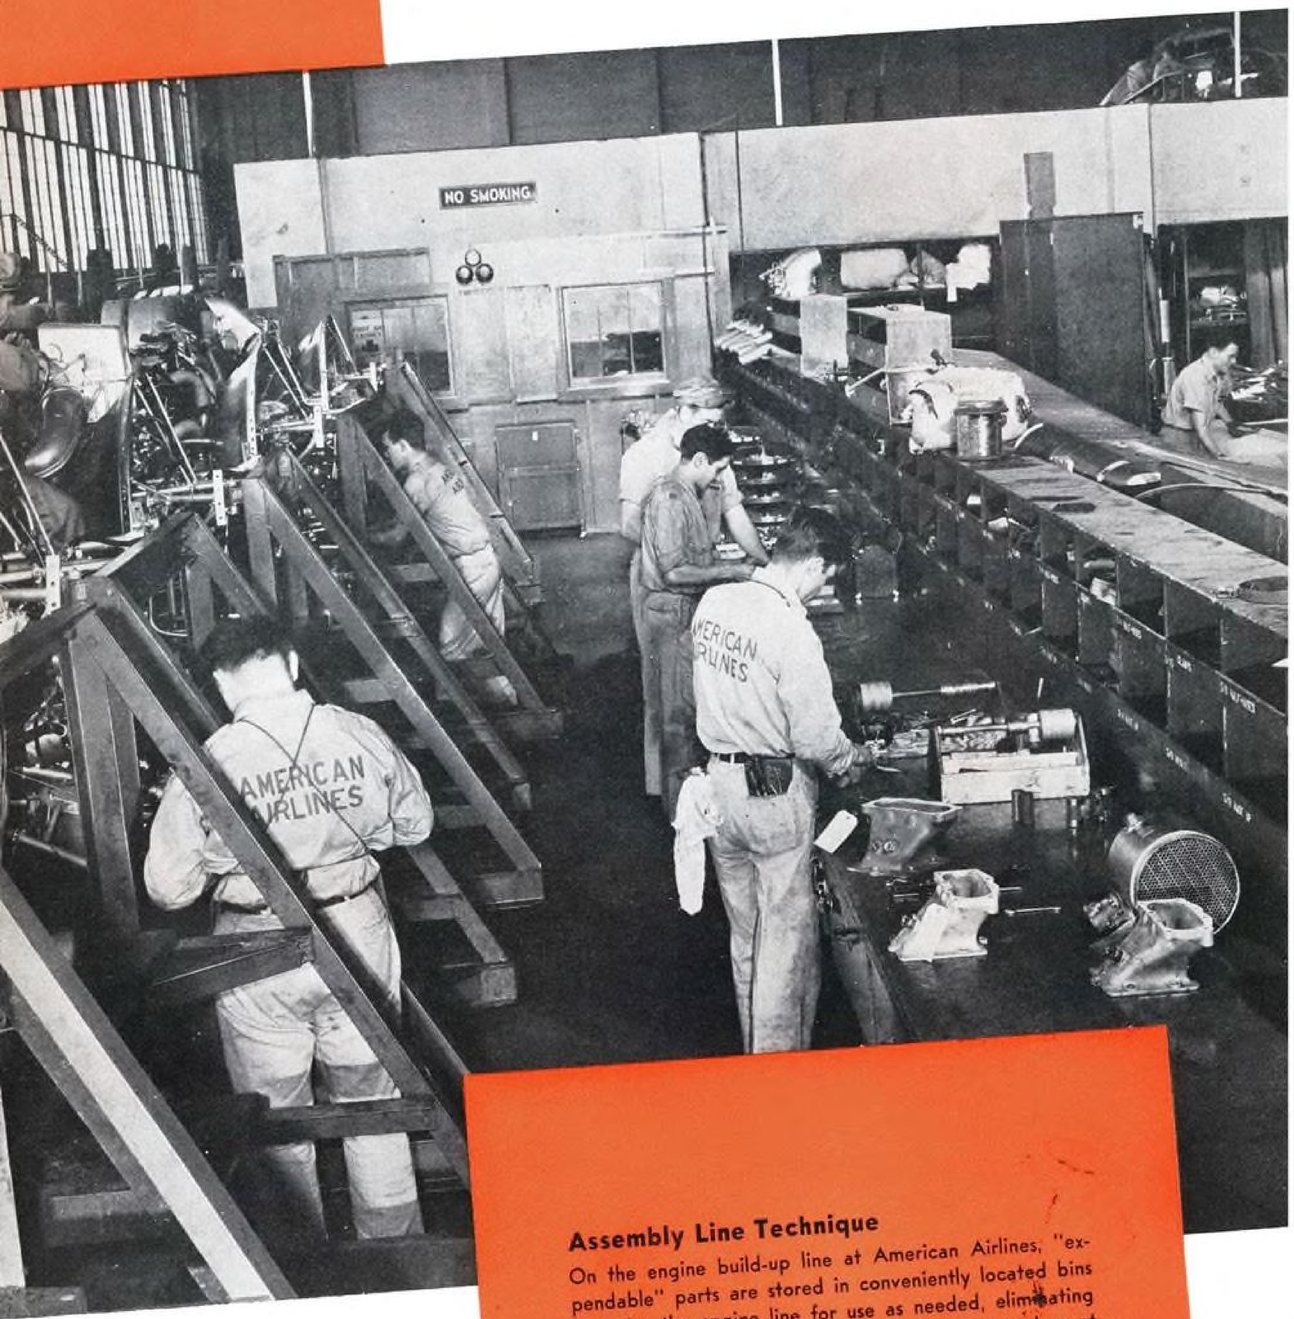

Assembly Line Technique

On the engine build-up line at American Airlines, "expendable" parts are stored in conveniently located bins opposite the engine line for use as needed, eliminating waste motion in going through requisition procedure at the storeroom. Broad work stand running the entire length of the line provides space for "subassembly" work with necessary parts conveniently at hand.

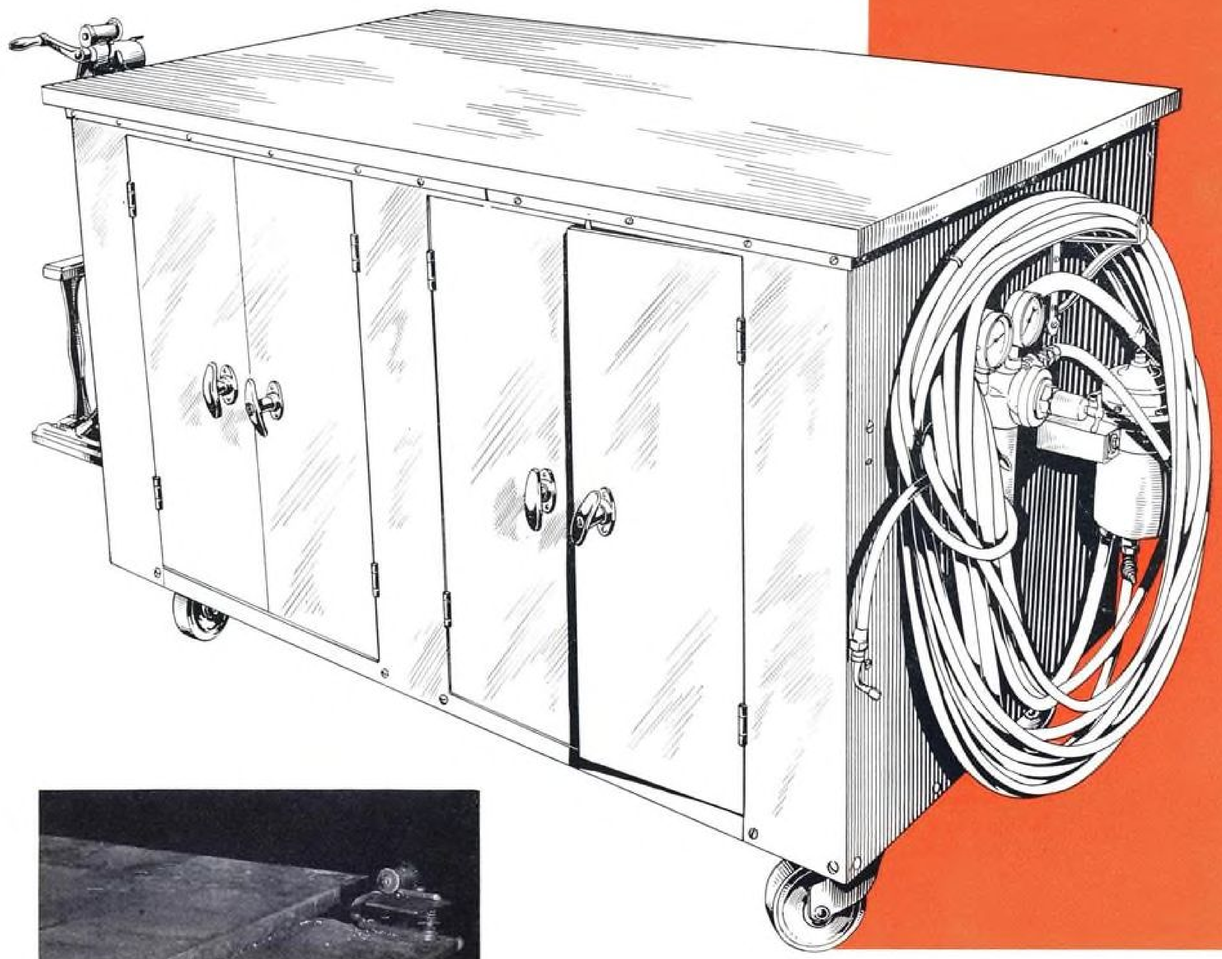

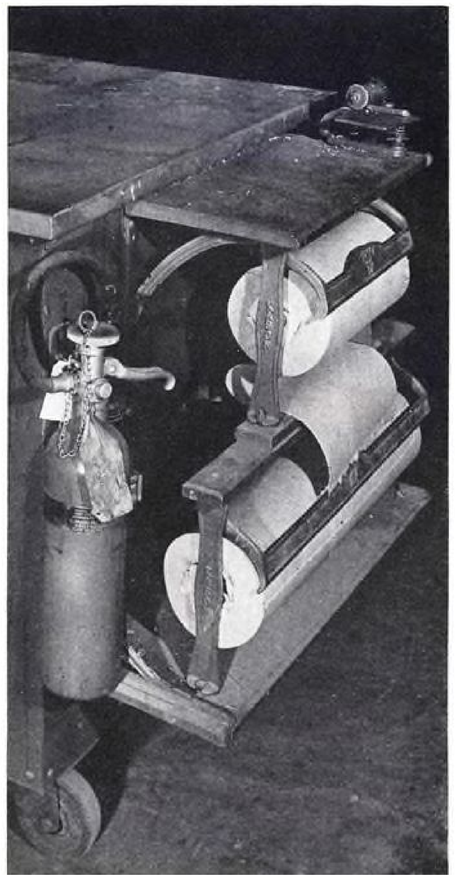

Portable Paint Stand In Use at American Airlines

Complete with compressor, sprayer, masking tape rollers and cutter, this completely selfcontained paint stand can be rolled right up to the airplane to do practically any type of painting job necessary. Photo at the left shows the masking tape rolls and cutter, as well as a fire extinguisher.

Aviation's Maintenance Notebook

Rocker Arm Socket Remover

Hydraulic fixture for removing rocker arm ball sockets made by Continental Air Lines personnel. The end of this device is turned to a diameter to fit the rocker arm and by applying pressure to the plunger the oil forces the ball socket out of the rocker arm.

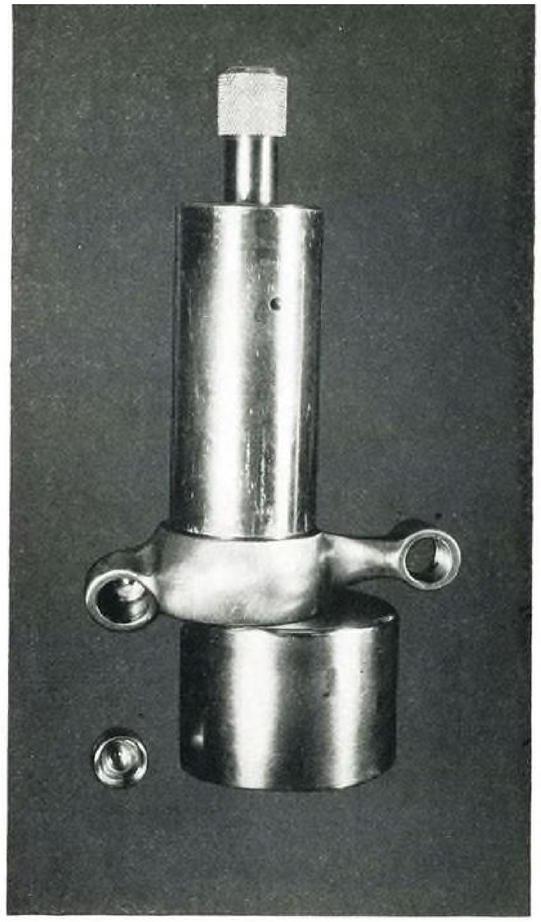

For Salvaging Cowl Flap Fastener Brackets

A jig for drilling cowl flap fasteners made in the Continental Air Lines machine shop for installation of bushings where formerly these bushings were discarded after the hole became enlarged due to vibration. The jig has a quick-acting lever clamp to hold the bracket.

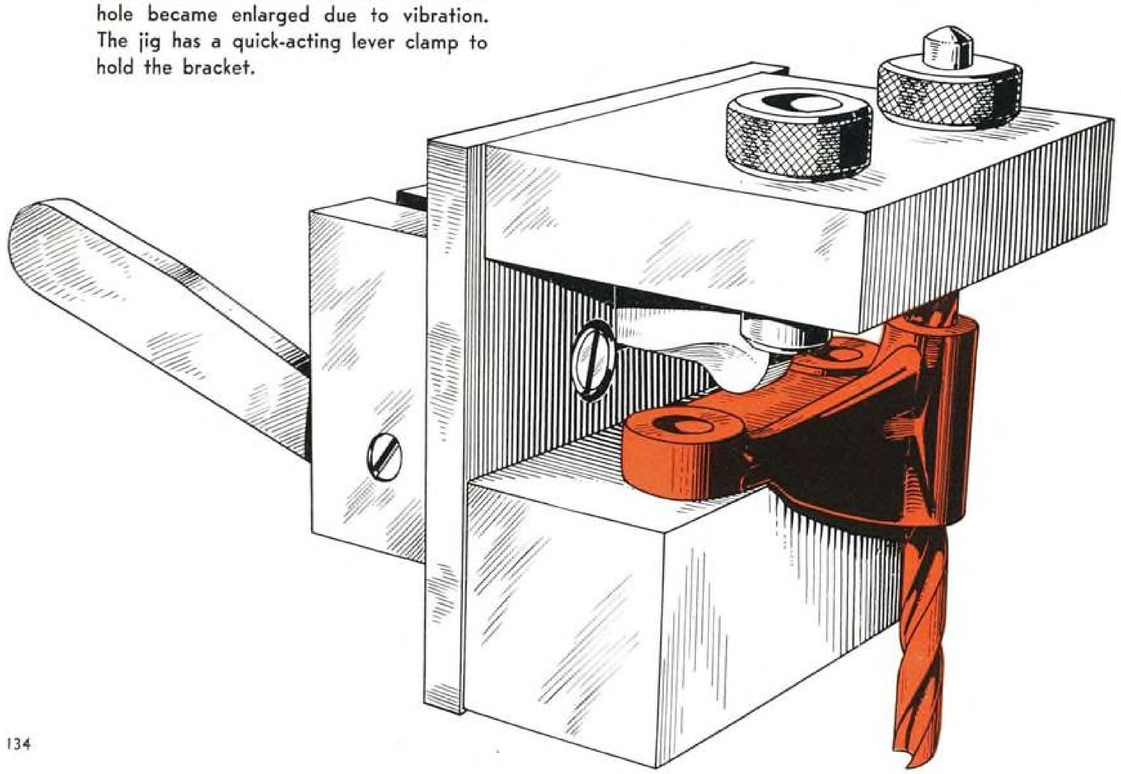

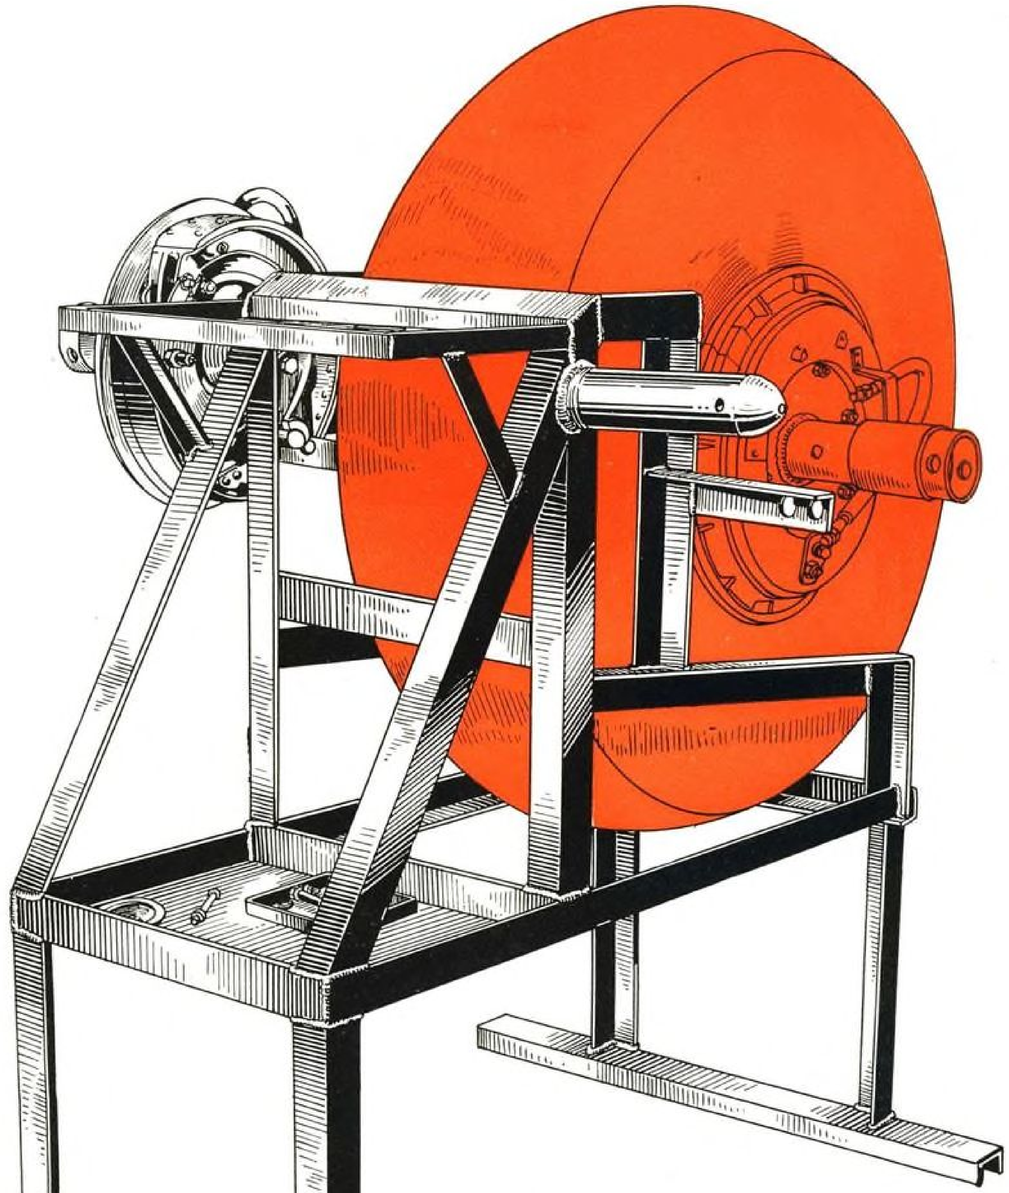

Wheel Brake Assembly Jig

Designed and used in American Airlines shops, this jig accommodates the entire wheel assembly and consists of two spindles upon which the two brake housing and mechanisms are built up or repaired. Convenient parts stands are included in the fixture. The net result is that the work is brought to a convenient level with all parts assigned a definite place for easier maintenance work.

Aviation's Maintenance Notebook

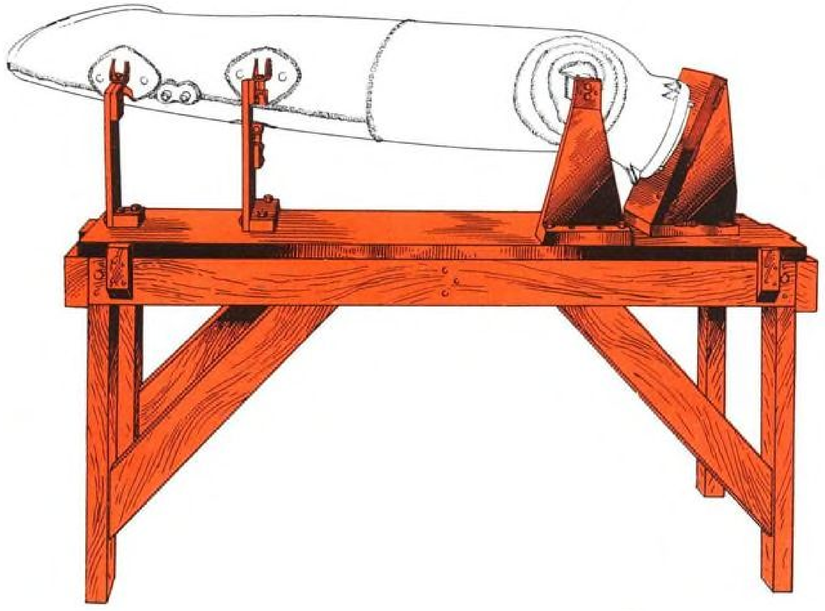

Exhaust Pipe Repair Jig

Cracking of exhaust tail pipes at the forward attachment point due to misalignment of attachment fittings when repairs were made to the pipe has been overcome by TWA maintenance engineers by use of this jig, which they designed and built. Note that all materials used in the jig are very heavy; this was found necessary to prevent distortion of the pipe during the cooling process after the pipe has been repaired or the fittings aligned. While in this case a stand was built especially for the jig, it can be used on any bench and stored to conserve space between jobs.

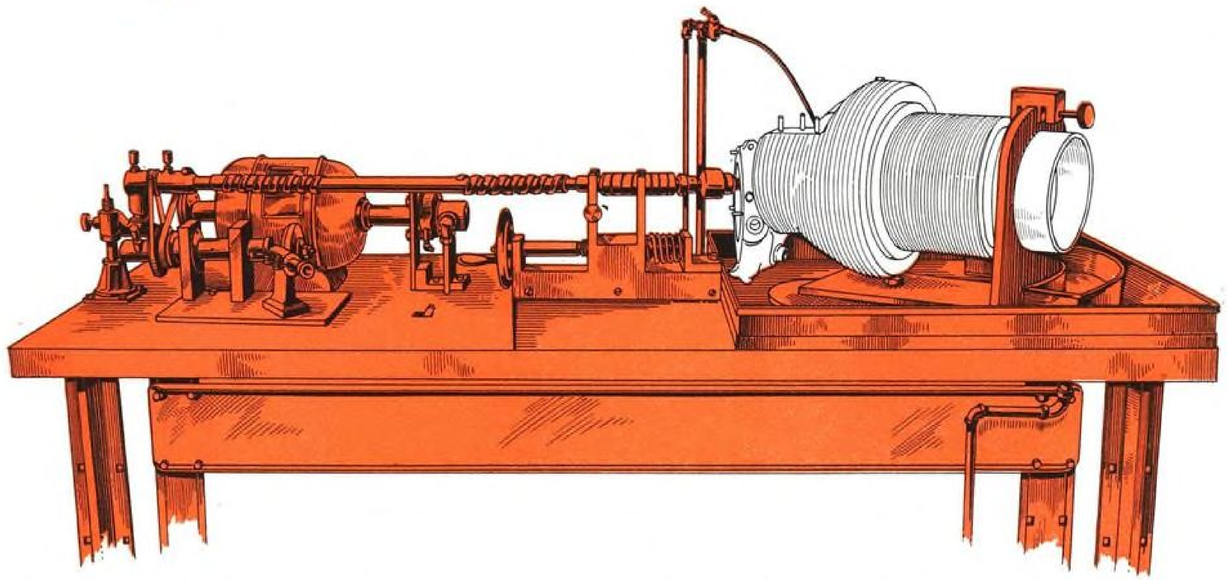

Speed and Accuracy Combined

This valve grinding machine was built by the TWA engine overhaul department after several other types had been tried and found wanting. It grinds either the exhaust or intake valve in 15 min., its 1-hp. electric motor driving the grinding wheel at 4,000 rpm. The shaft which moves the grinding wheel in and out is provided with micrometer adjustment for close adjustment of the wheel. The machine is also equipped with a stationary wheel dressing mechanism, seen just in front of the motor. A constant flow of kerosene is pumped to the grinding wheel through the line shown just to the left of the cylinder. The fluid, which drains through the pan shown just below the right end of the cylinder, is thoroughly filtered before being fed again to the wheel.

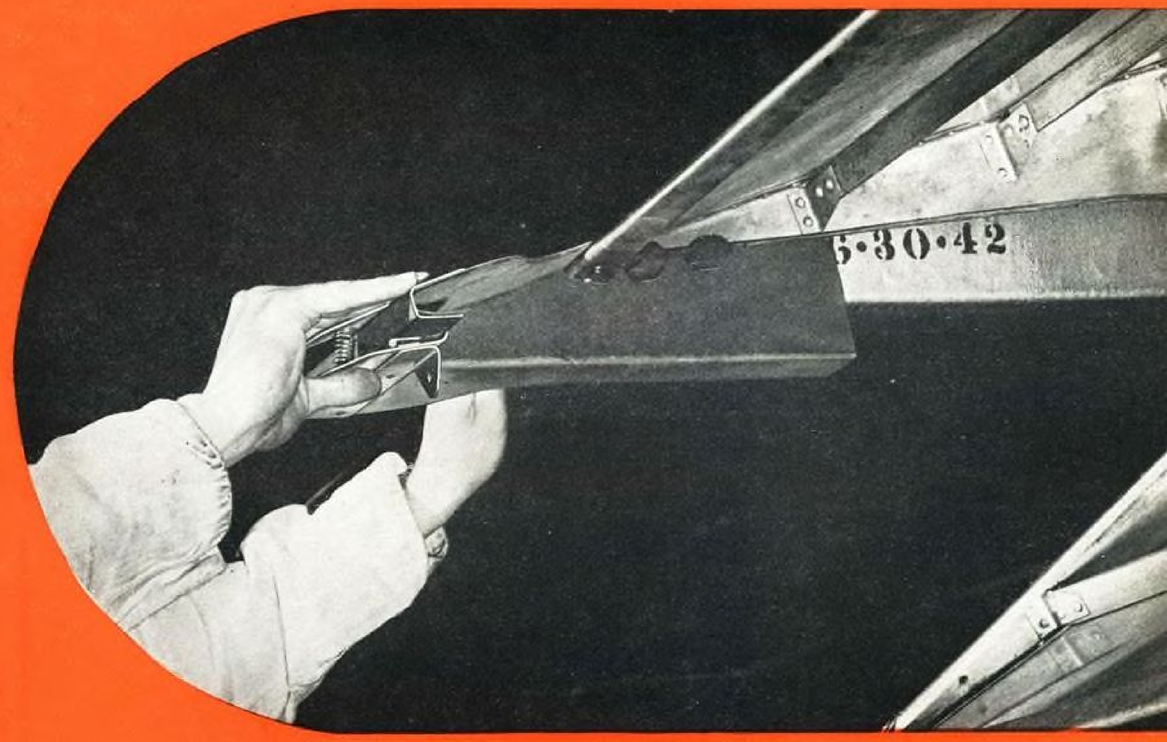

Aileron Control Stop

This unusual device was designed by the TWA maintenance department to prevent aileron control surfaces of DC-3 aircraft from whipping when subjected to extreme gusts of wind on the ground. The important feature of this control stop is to eliminate any damage that might be encountered should the landing flaps be lowered with the control board installed. Note that the lower inboard portion of the stop is cut away to provide lowering of the flaps without damage. The attaching clip that engages the trailing edge of the wing when the board is installed is attached to the standard ball weight in such a manner that the clip will be released allowing the board to be pulled off automatically, should the airplane be moved before the board is taken off by ground personnel.

Heavy Duty Jack

The jack, built by Pan American maintenance engineers, was designed especially for use with the Boeing 307 *Stratoliners*. The wheels can be lifted by moving the two handles seen at either side and the load carried directly to the ground through the shoe at the bottom of the hydraulic column. The exceptionally wide base eliminated the need for slings to steady the plane while being raised on the jack.

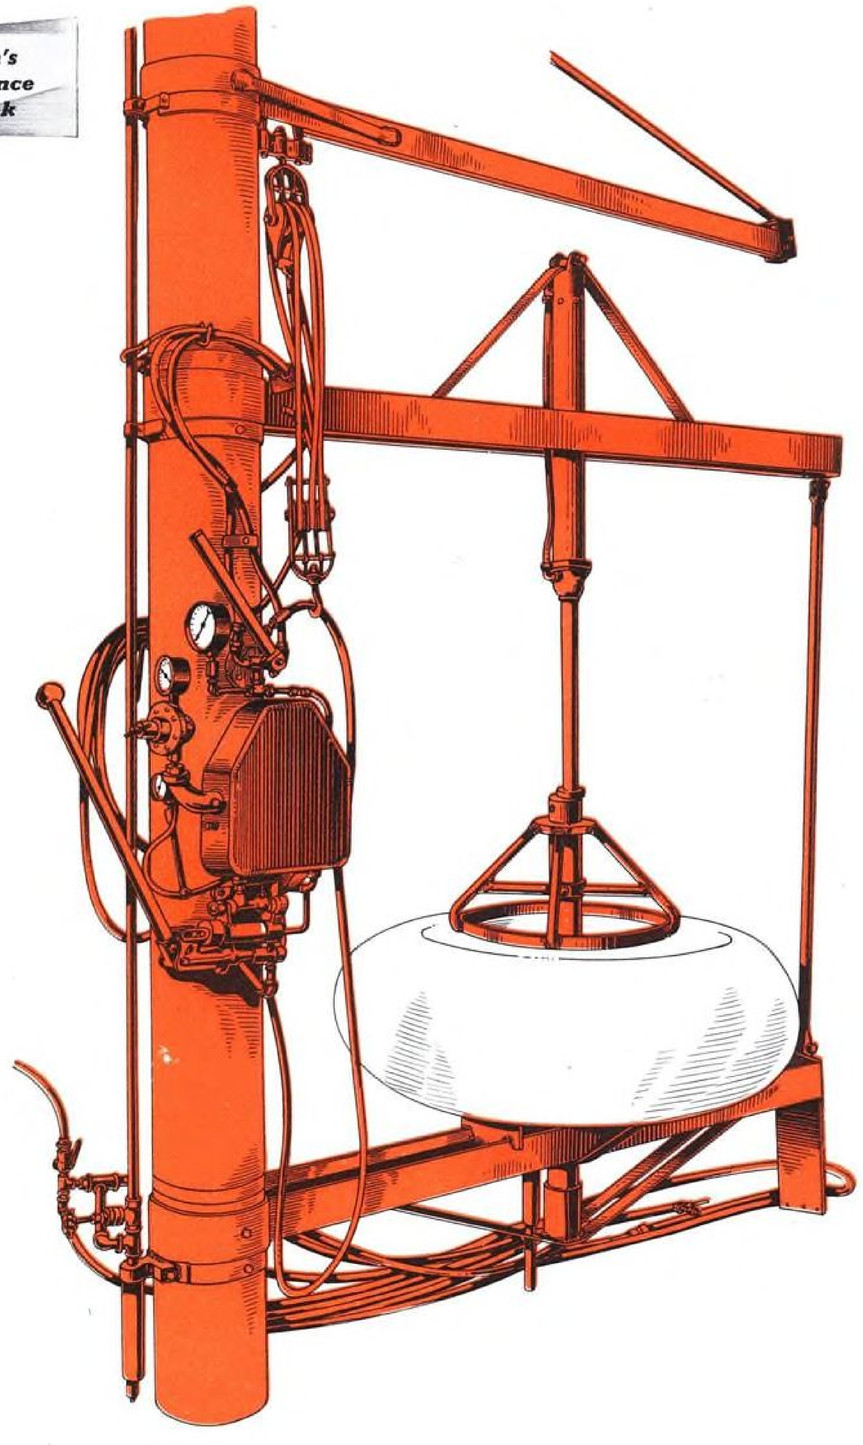

Mechanical Tire Iron

To overcome the problem—and a big one it was—of separating tires from wheel flanges for large aircraft, the TWA maintenance department designed and built this tire mounting and dismounting jig and assembly which has been used for both DC-2 and DC-3 planes. In operation, the tire, wheel and axle are hoisted by the end of the axle —with the block and tackle seen at left—and the complete assembly is installed in the dismounting rack. The actual separation of tire and flange is accomplished by hydraulic pressure—built up by the hand pump shown attached to the main column at left—which gives the power necessary to get the bead over the flange.

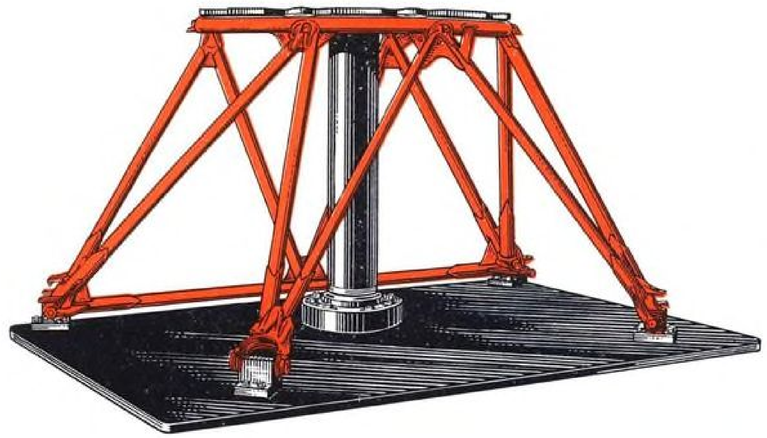

Engine Mount Alignment Jig

Production line standards of precision can be maintained with this engine mount alignment jig which was set up by Eastern Air Lines' maintenance department. The central vertical column, of heavy tubular material, is bolted to the heavy metal base which, to insure rigidity, is mounted on steel I-beams. The ring aligning plate at top is also of heavy metal to maintain accuracy.

Test Stand Simulates Flight Conditions

Designed and developed by United Air Lines, this test stand permits accurate checking of turn indicators under simulated flight conditions. A saddle holding the indicators is turned by a synchronous motor at the rate of 180 deg. per min.—United's standard rate of turn. A friction clutch is provided for convenience in checking instruments for general operation. The device is connected to a manometer by means of which it is possible to check the vacuum which operates the instruments.

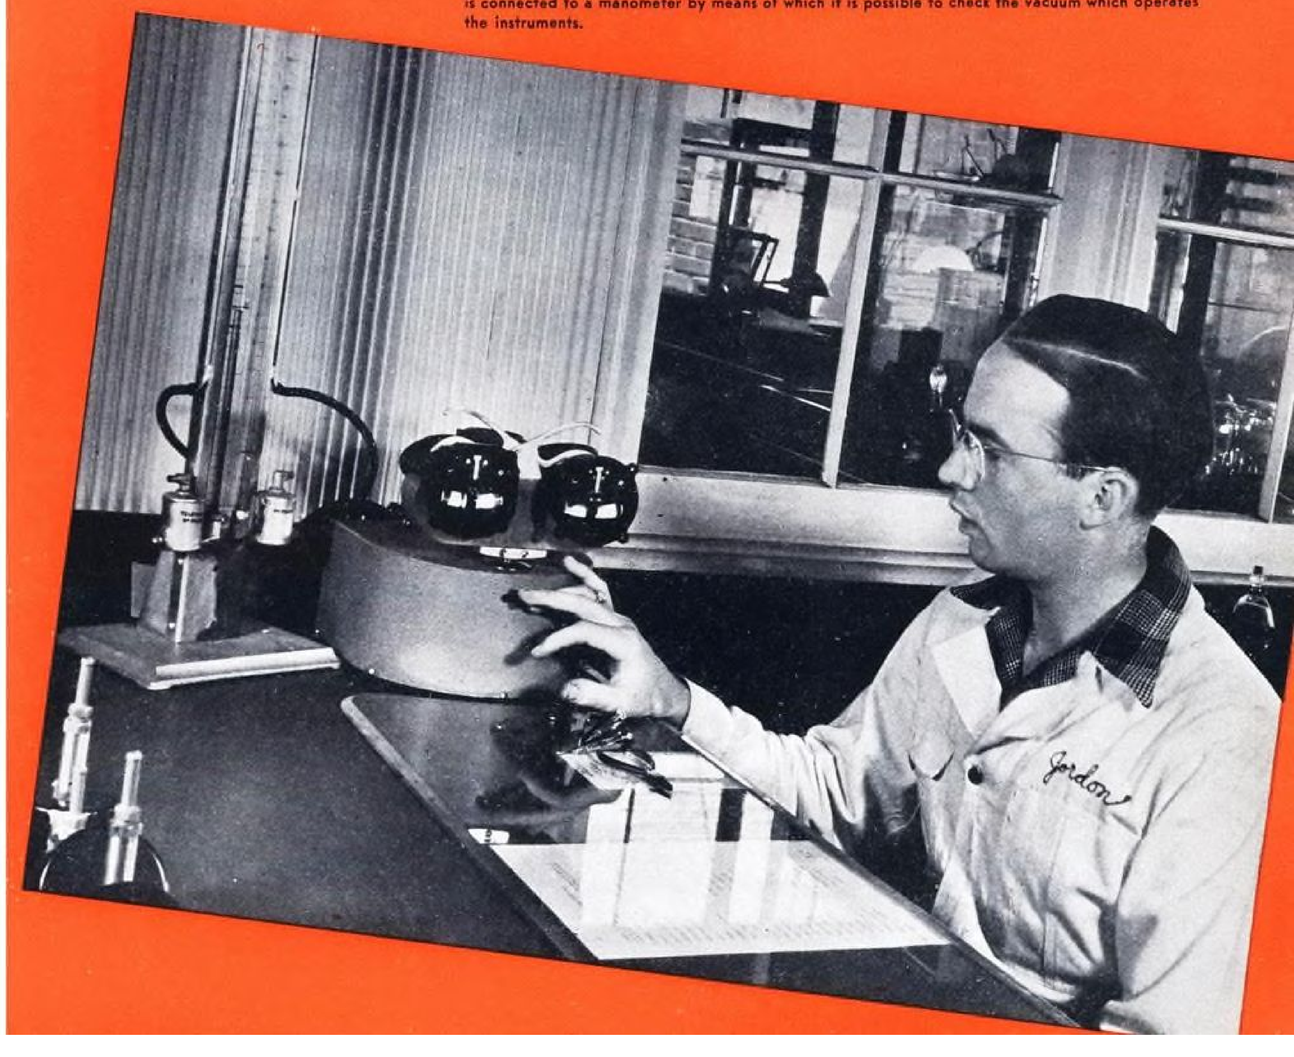

Aviation's Maintenance Notebook

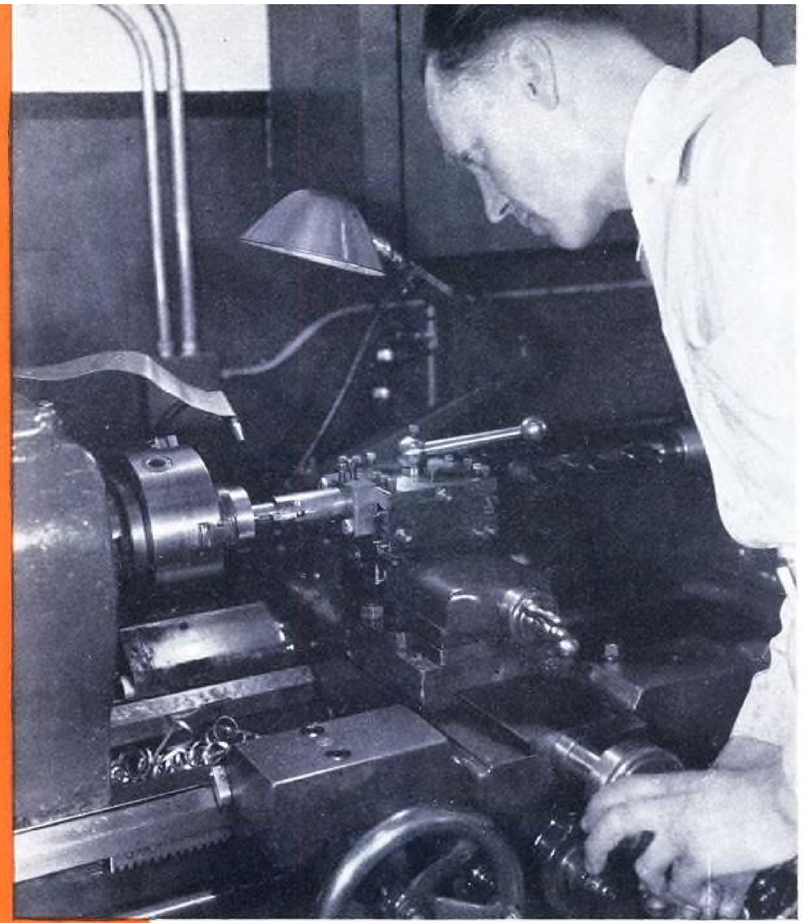

Turret Fixture for Engine Lathe

A square turret fixture for an ordinary engine lathe made in Continental Air Lines' machine shop by Earl Peters. One side of the turret is fixed for boring tools and the other sides for cutting tools. It is practically impossible to buy such a fixture now but the normal cost would be around $185. This fixture cost $30 to make.

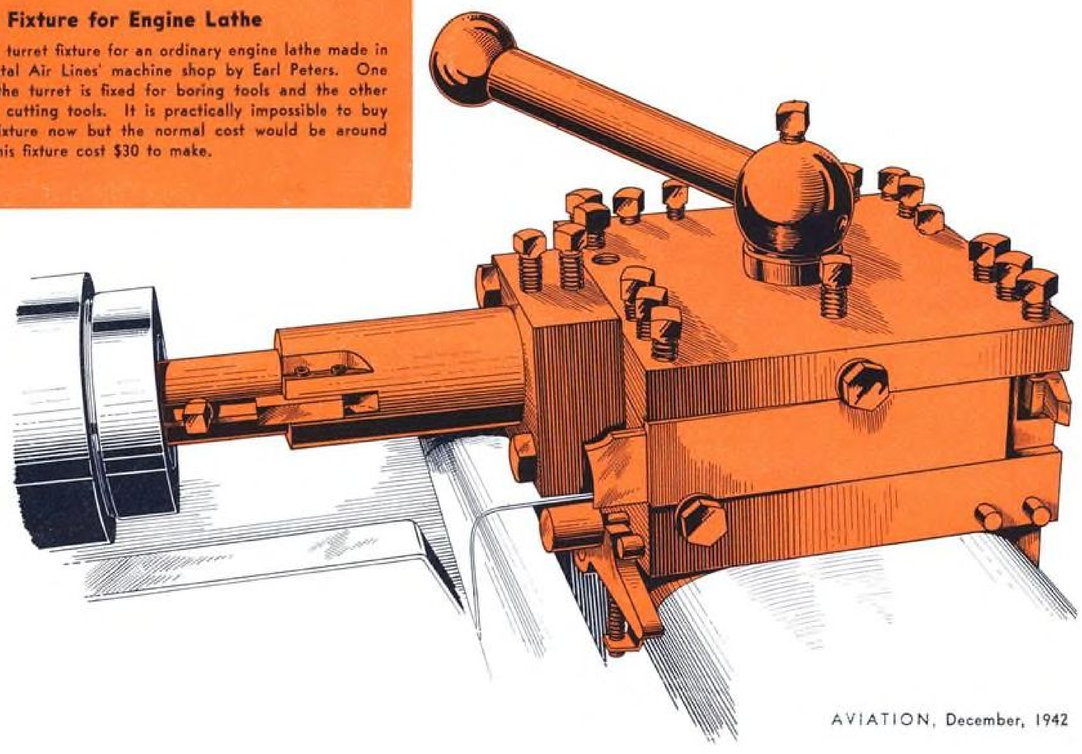

Aviation's Maintenance Notebook

Tire Removing Fixture at Continental Air Lines

The wheel and tire are assembled on the shaft with the bearings in place. By tightening the nut pressure is exerted on both beads by ring just clearing the flanges on each side of the wheel. Tightening the nut will cause the bead to drop in the center of the wheel facilitating easy removal of the tire.

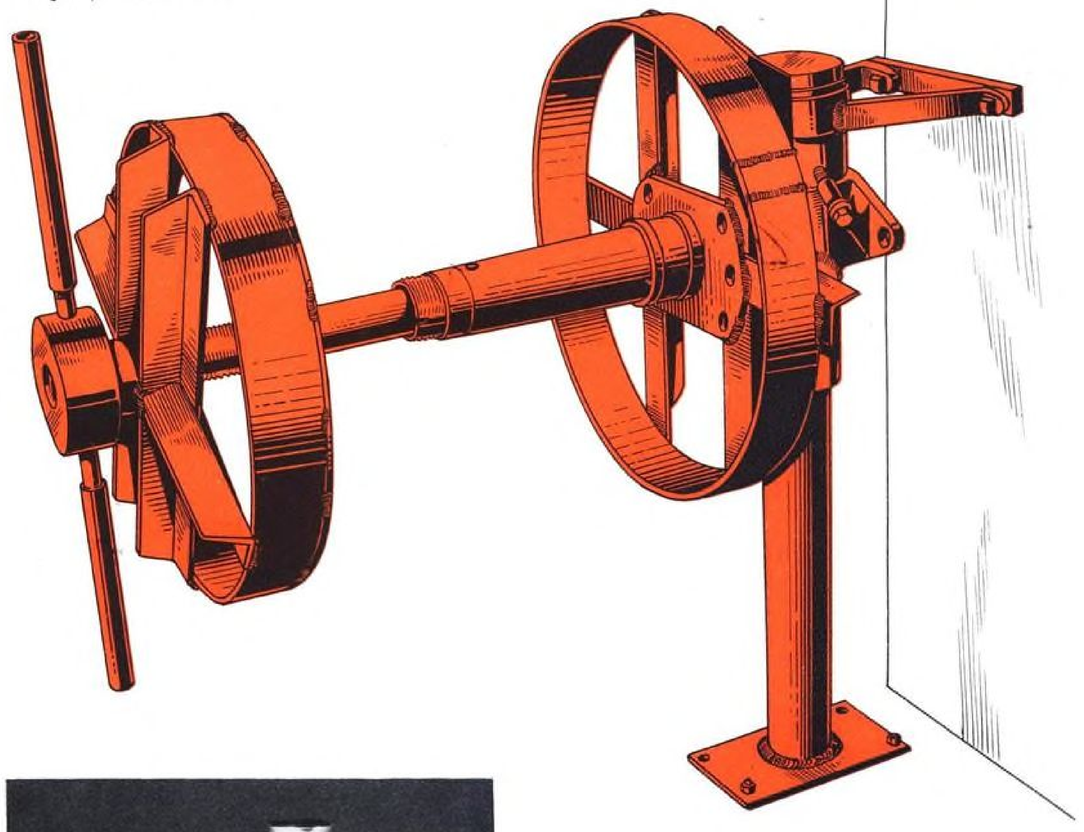

Tappet Ball Socket Remover

Another hydraulic fixture designed at Continental Air Lines for removing tappet ball sockets. By pressing one plunger down the oil forces the ball socket out of the tappet.

For Better Braking

This machine, assembled from a wide variety of "salvage" parts—including a household vacuum cleaner—was designed by the TWA maintenance department for sanding brake shoe surfaces so they will be perfectly round after assembly as a unit. Thus, when the brake assembly is fitted to the ground brake drum, complete alignment may be obtained and the proper clearance adjustments made with little difficulty. Shop cleanliness is enhanced by use of the vacuum cleaner collector-bag shown below the sanding wheel.

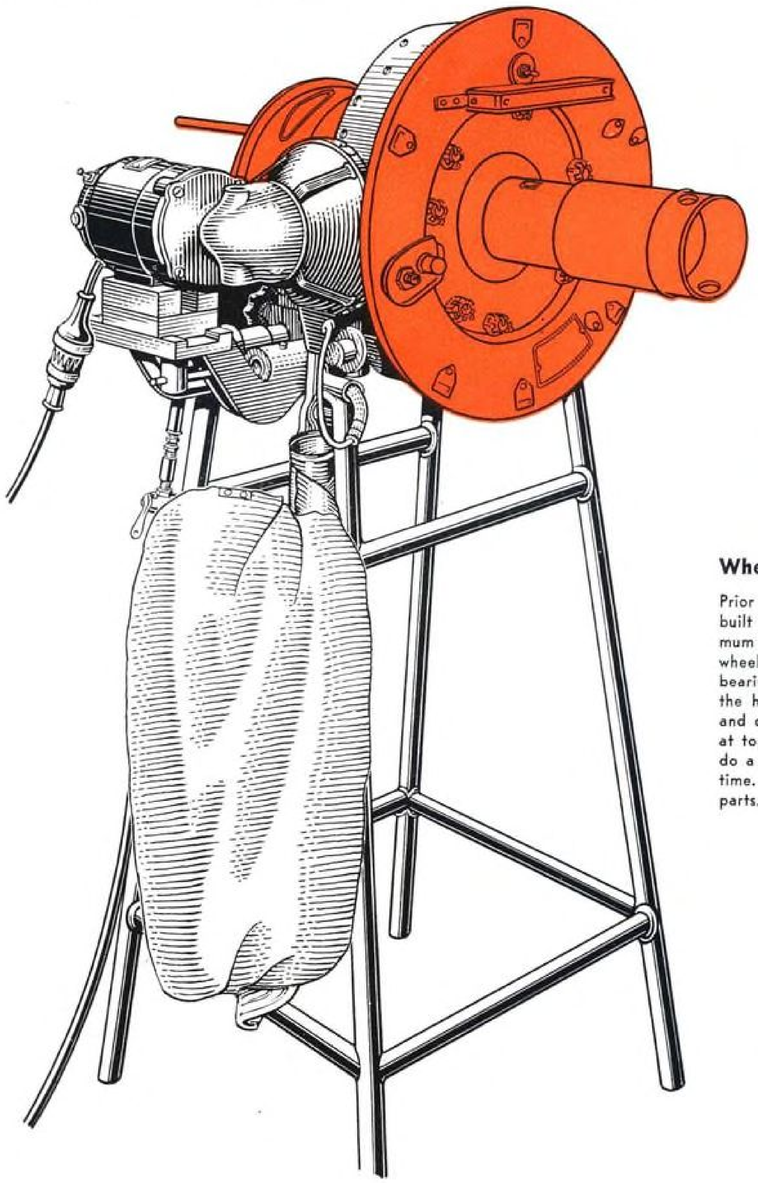

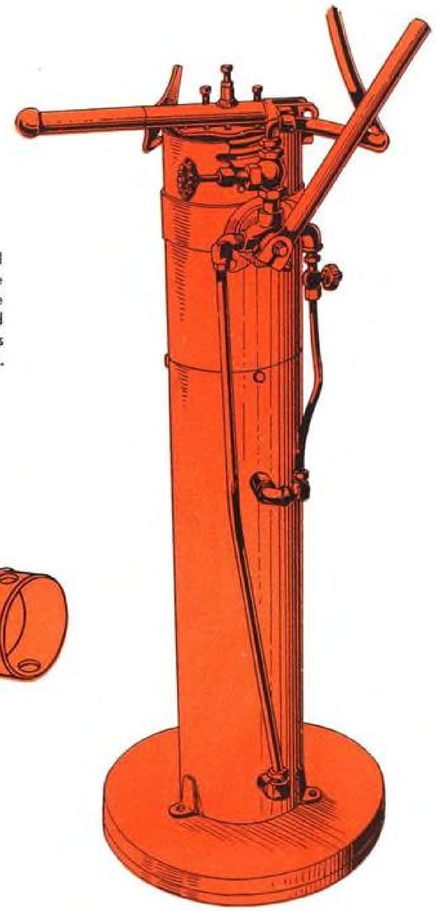

Wheel Bearing Greaser

Prior to installation of this machine, designed and built in the TWA maintenance department, a minimum of 10 min. were required to properly work wheel bearing grease in around each roller of the bearing race. The bearing is locked in place under the horizontal handle seen at top of the machine and compressed air, turned on by the handle seen at top right, forces the grease into the bearing to do a more thorough job at considerable saving of time. The machine was built largely of "salvage" parts.

Aviation's Maintenance Notebook

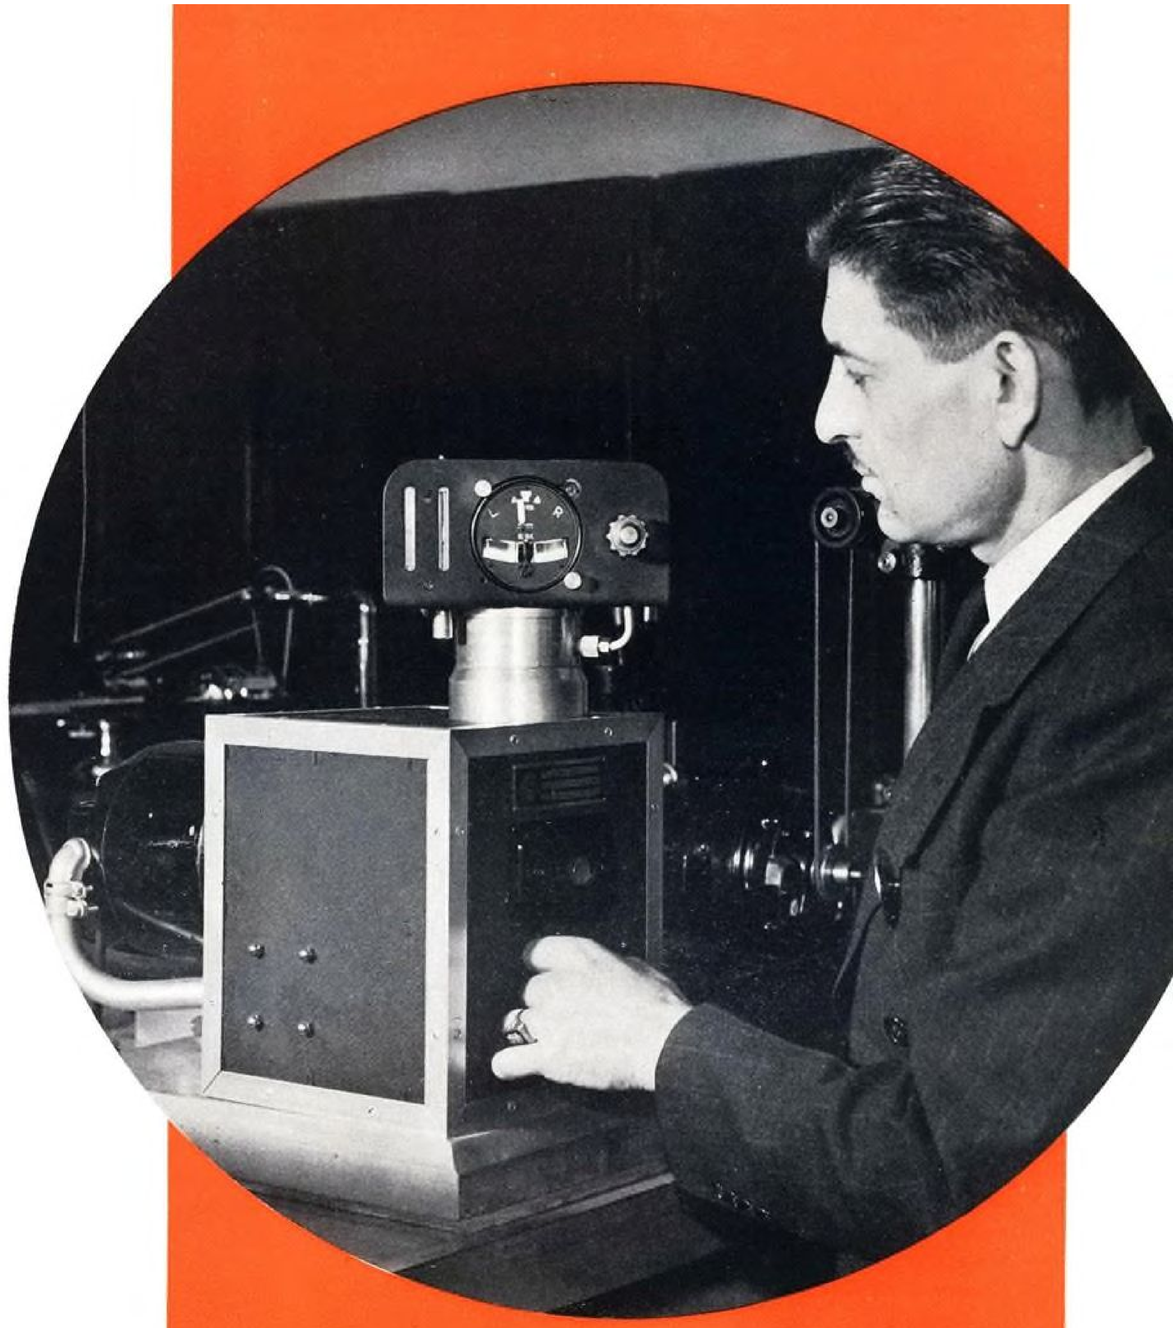

Turn and Bank Test Stand

A reversible synchronous motor turning 1,000 rpm. geared down 3,600:1, driving a turntable and transfer head comprise the main units of this test stand. On the turntable is mounted the suction regulator valve, manometer and the turn and bank indicator. The vacuum source is brought through the base of the test stand and carried up to the transfer head which distributes vacuum to the turntable throughout a 360 deg. turn. The use of this machine eliminates the human element in timing of turns with a stop watch. As TWA uses single width 3 deg. per second rate of turn all that is necessary to check the instrument on the stand is to set the vacuum on the turn instrument to 2 in. HG and operate either in left or right turns and calibrate the instrument mechanism until desired one needle width indication is obtained.

Save Critical Metals

GET BETTER PRODUCTS WITH GRAPH-TUNG STEEL

Graph-Tung uses a negligible amount of Molybdenum, no Chrome, and less Tungsten than other steels use. Still it wears longer and machines at least 25% faster than competing fast finishing steels.

Alloys in Fast Finishing Steels Competitive to Graph-Tung

Steel	Molybdenum	Chrome	Tungsten
A	.40		4.00
B			3.00
C			3.50
D			2.84
E		.25	3.60
F		.55	3.20
G			3.50
H			3.50
I		1.00	4.00
GRAPH-TUNG	.50		2.60/3.00

TO ASSURE VICTORY
BUY UNITED STATES WAR SAVINGS BONDS & STAMPS

Faster and Easier
Graphitic Steels--a faster and easier way of making tools and dies--more production for Victory; greater profits in post-war competition. Start using them now.

THE TIMKEN ROLLER BEARING COMPANY, CANTON, OHIO
Steel and Tube Division

Manufacturers of Timken Tapered Roller Bearings for automobiles, motor trucks, railroad cars and locomotives and all kinds of industrial machinery; Timken Alloy Steels and Carbon and Alloy Seamless Tubing; and Timken Rock Bits.

TIMKEN
TRADE-MARK REG. U. S. PAT. OFF.
GRAPHITIC STEELS

MANUFACTURING
SECTION OF AVIATION

IN THIS SECTION

Design Considerations for Plywood Structures, Part II — L. J. Marhoefer — 146
Design and Installation Factors for Aircraft Hydraulic Accumulator Systems — Edward M. Greer — 150
Fabricating Drop Hammer Dies — Chris J. Frey and Stanley S. Kogut — 158
Aircraft Standards Committee Program Keyed to War Needs — Glen M. Aron — 165
White Floors Light Those Under-Wing Shadows — F. L. Mabie — 166
Synthetic Coatings Protect Engine Parts — 169
Heat-Treating Aircraft Engine Parts — 171
Review of Patents — A. Harry Crowell — 175
Urge Standards Adoption — 175

AVIATION's Sketch Book of Design Detail
- Retractable Tail Wheel of Republic P-43 *Lancer* — 176
- Rear Gunner's Auxiliary Controls in Douglas A-20A — 176
- Installation of Wing Tanks in Junkers JU-88 — 179
- Junkers JU-88A-1's Fuselage-Tank Jettisoning System — 179
- Fuselage Design Details of Engineering Corporation's *Ercoupe* — 180
- Landing Gear Truss Attachment of General Aircraft *Skyfarer* — 180
- Method of Attaching Plywood Aft-Section of NAA Trainer — 180

AVIATION's Engineering Data Book
- Machinability of Aluminum Alloys — 183
- General Characteristics of Tools for Machining Aluminum — 185

New Products and Equipment
- Information Tips on Aviation Publications — 188
- Latest Machine Tools — 189
- Shop Equipment and Accessories — 198

Subcontractors Section
- Boosting Bomber Output by Subcontracting — T. J. Dunnion — 221
- Men and Machinery Available for War Work — 225

PRODUCTION • DESIGN •
RESEARCH • ENGINEERING

DESIGN CONSIDERATIONS FOR PLYWOOD STRUCTURES . . . II

The second in a series of articles containing fundamental information on plywood airplane design discusses limitations imposed by fabrication processes and explores new basic design features made possible by use of plywood as an aircraft material.

By L. J. MARHOEFER, *Chief Engineer, Vidal Research Corporation*

A CLEAR UNDERSTANDING of the molding process is essential if a proper and economic design is to be effected. Prime consideration must be given to the construction of the article, its molding and subsequent removal from the form. In effect this consideration is really only another step in the list of compromises required of any design.

Due to the large number of articles published recently on fluid pressure molding, a brief summary of the salient points should suffice. Fluid pressure is essentially a clamping device having the distinctive feature of applying equal pressure perpendicular to the surface of any enclosed body. This pressure is harnessed to perform useful work by establishing a fluid tight form of any desired shape on one side of the raw stock and a fluid tight membrane on the other. If the fluid is enclosed in a pressure resistant vessel and the pressure increased, the membrane and fluid tight form will be forced together and since the raw stock is already trapped between the two it also will be clamped against the form. (Fig. 1.).

Setting of the bonding agents by means of heat, aging or chemical reagents is an obvious step. The result is a piece closely conforming to the shape of the form and completely bonded. The designer's vital concern is that the piece be of simple construction and removable from the form after it has been molded. Simplicity is an ideal of any construction and requires no general discussion. Removal from the form is more readily understood if a piece is considered to be similar to a casting for which no core blocks can be constructed.

Moldable Piece Details

The requirement of no "back-draft," usually encountered in casting design, is present with somewhat enlarged tolerance. Most articles after molding have sufficient flexibility to permit "springing" them open to an appreciable degree and then sliding them off the form. The amount of spring varies with the size piece and stiffening members molded into it. Examples of the amount of "spring" are shown in Figs. 2 and 3. Fig. 2 is representative of a two-place commercial fuselage in which a ¼-in. strip was molded in a "locking" position. No great difficulty was experienced in springing this fuselage out from the bottom and top sufficiently to free the ¼-in. strip and lift the piece from the form. Fig. 3 is a wing shell in which a ⅜-in. lock was freed by "springing" the piece and sliding the form out of the trailing edge.

No precise rules may be laid down for the amount of spring with the exception of computed stress values based on required deflection in the shell when opened the requisite amount. Such computations would obviously be tedious and current practice has been to rely on judgment and trial.

Collapsible forms are only a partial answer to this problem. They have been constructed for many pieces and used successfully. The principal deterrents are the added expense in the original tool cost and the difficulty of realignment with sufficient accuracy in production. Their use is advisable only in extreme cases since most articles can be adjusted to permit removal of the forms.

The choice between male and female mold reduces primarily to economic factors involved in the cost and difficulty of finishing the molded article balanced against the cost of installing the stiffening members after molding. The salient points favoring a reinforced structure constructed on a male mold are the elimination of the highly skilled joining operations required to install stiffeners and frames after molding and the assurance that the "molded-in" reinforcing is properly bonded regardless of the skill of the fabricator. The inherent excellence of the bond between the shell and reinforcing members is not clearly appreciated by many designers due, primarily, to their lack of familiarity with the resulting product and the skill required to obtain an equal "built-in" bond.

Fundamental Reason for Integral Reinforcing

The reason that these "molded-in" reinforcing members are soundly bonded is based on a fundamental requirement of any glue joint. This requirement is "there must be intimate contact between the bonding surfaces." This requirement is the reason behind the skilled craftsmen's care in preparing scarf joints and then applying extreme clamp pressures. The first operation eliminates all inherent irregularities and renders the two surfaces substantially coplanar. The second serves to overcome both the lack of skill exercised in the first operation and to prevent the warping and grain lift due to glue moisture from defeating a properly prepared joint. Inherent in the above are two operations practically impossible to control in a production set-up. The present acceptance of the "built-in" bond is a tribute to the conscience and care of the average workman and the ingenuity of the designer in locating such joints where only low stress values are needed. The isolated structural failures in service should be a clear warning that the system requires re-examination.

The fluid pressure molding operation combined with heat contains all the necessary elements required to achieve the fundamental intimate contact between the surfaces to be joined. Most of us are familiar with the fact that wood when heated may be formed into shapes not practicable when they are

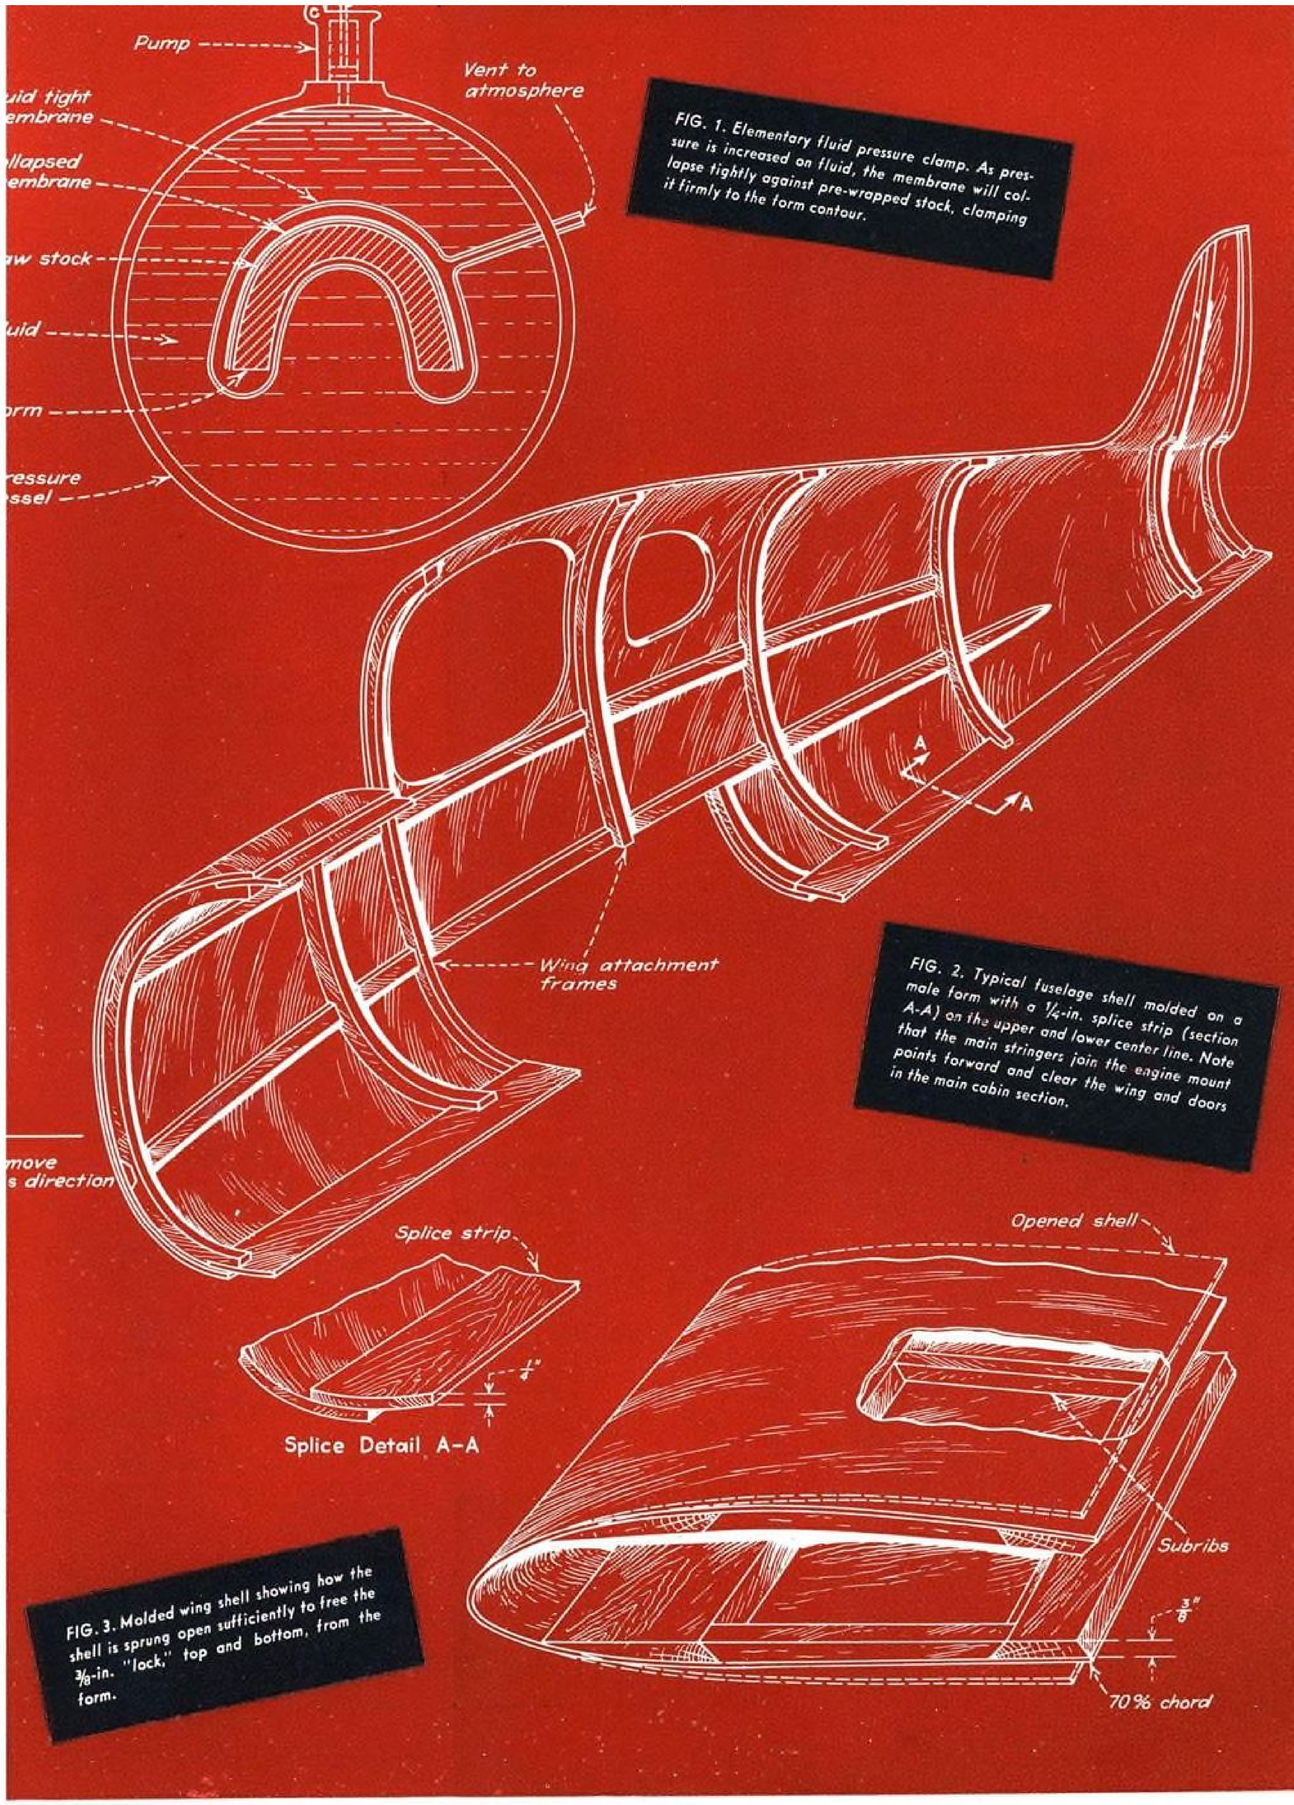

FIG. 1. Elementary fluid pressure clamp. As pressure is increased on fluid, the membrane will collapse tightly against pre-wrapped stock, clamping it firmly to the form contour.

FIG. 2. Typical fuselage shell molded on a male form with a ¼-in. splice strip (section A-A) on the upper and lower center line. Note that the main stringers join the engine mount points forward and clear the wing and doors in the main cabin section.

FIG. 3. Molded wing shell showing how the shell is sprung open sufficiently to free the ⅜-in. "lock," top and bottom, from the form.

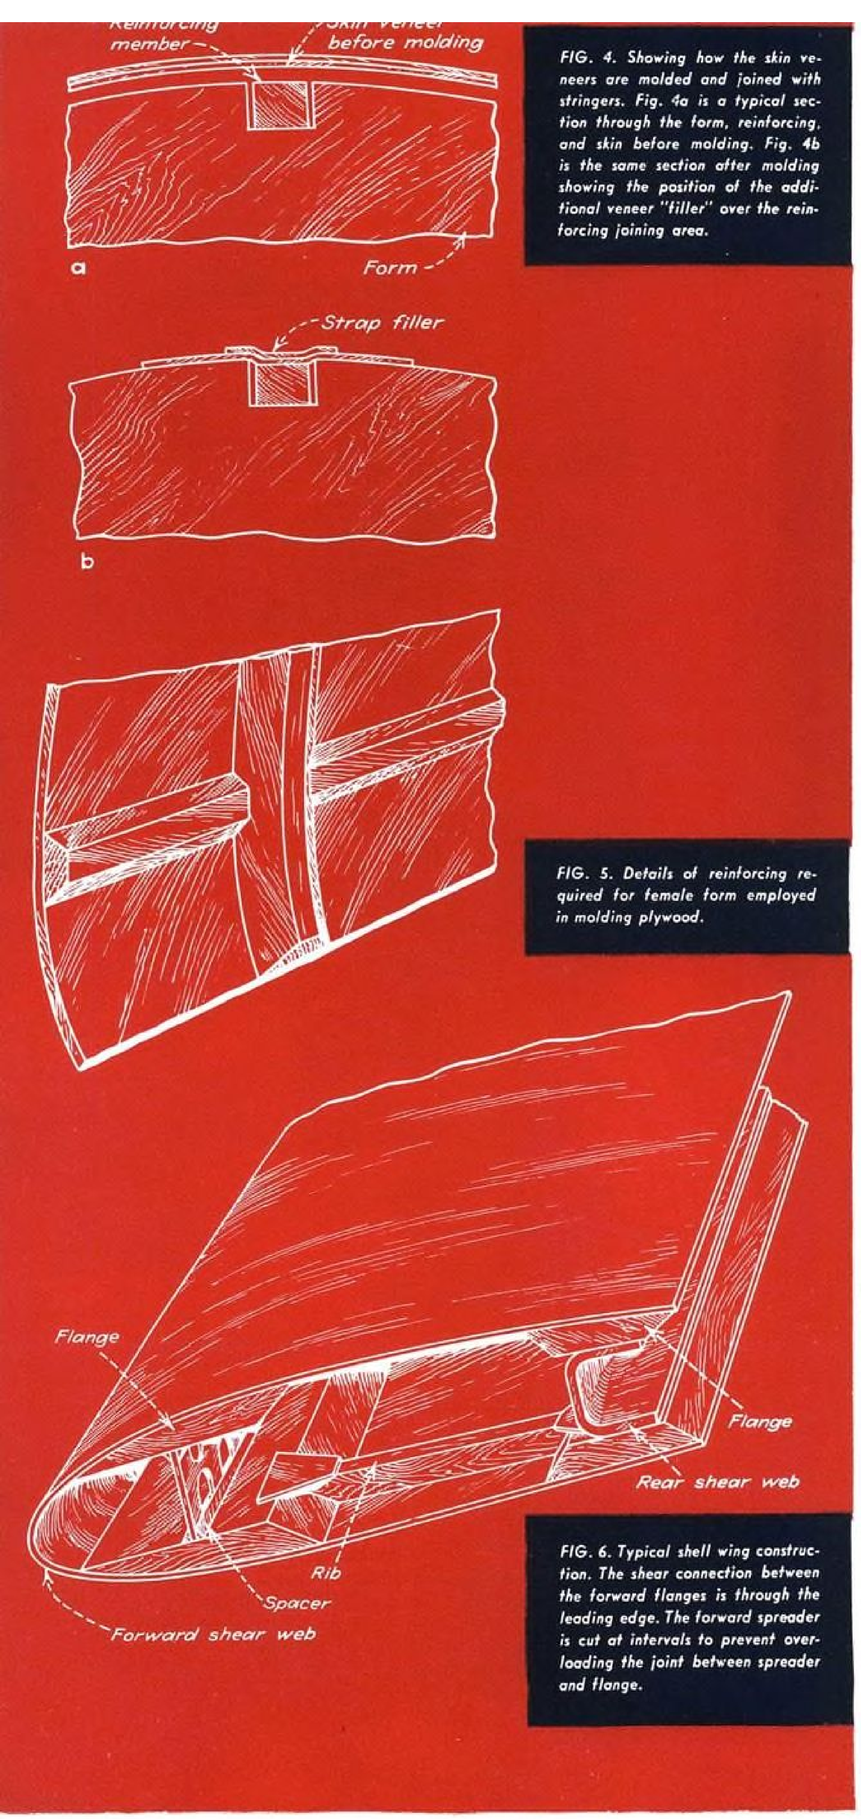

FIG. 4. Showing how the skin veneers are molded and joined with stringers. Fig. 4a is a typical section through the form, reinforcing, and skin before molding. Fig. 4b is the same section after molding showing the position of the additional veneer "filler" over the reinforcing joining area.

FIG. 5. Details of reinforcing required for female form employed in molding plywood.

FIG. 6. Typical shell wing construction. The shear connection between the forward flanges is through the leading edge. The forward spreader is cut at intervals to prevent overloading the joint between spreader and flange.

cold. Furthermore these shapes are substantially retained after the wood has cooled. Past practice has made use of this in the forming of boat ribs, automobile frames and similar operations. This forming effect is accentuated when applied to veneers and was driven home by the annoying ability of the veneer to outline perfectly even a 0.01 shim accidentally left between the veneer layers.

It was apparent that the veneers under the heat and pressures being used would deform until they broke or rested against a solid foundation. The early attempts to install reinforcing structures during the molding were approached with extreme caution and with the assumption that a poor grade of bond would result. For this reason the bonded areas were made large. Encouraged by the success of these pieces the bonding area has been continually reduced and the current limitations on bonding surface are principally for shop handling before the article is assembled.

Surface Irregularities

A more detailed discussion of the bonding of reinforcements into a structure is felt to be warranted. Fundamentally it appeared rational to assume that since an unlimited number of sound glue joints might be formed between layers of veneer that one more glue line should be feasible to which a stringer or frame was attached. The first articles so constructed were indeed distressing. Every frame and stringer was sharply outlined as a lump or depression in the shell. This was at first blamed on insufficient care in cutting grooves in the forms and inaccuracy in the size of the reinforcing parts. In spite of the most exhaustive efforts perfect articles were not obtained. This very irregularity in the surface, however, was primary evidence of the fact that the skin veneer under heat and pressure would deform until it was in complete and intimate contact with a solid foundation whether that foundation was the form or a reinforcing member. The inability to cut the reinforcing members so that they were invisible on the finished article was determined as due to the different shrinkage rates under heat and pressure and was a further unrealized asset. During the molding cycle the heat tends to bring all parts of the structure to the same moisture content.

The achievement of a smooth surface was not complicated as to solution but somewhat delayed in achievement. One obvious method was the use of a female form with the pressure dam against the reinforcing parts. Several articles were successfully so constructed and achieved the desired result of giving a fine smooth skin. Special care was necessary in designing the reinforcement in order to prevent bag failure. (Fig. 5.) The most serious drawbacks were the difficulty encountered in assuring proper locations for the reinforcements and the proper placing of the veneer on the female form.

The advantage of the male form is quite clearly and primarily the fact that it may be used as a jig to hold the reinforcing members in their proper position and thereby assure accurate duplication of articles. Its disadvantage in leaving the reinforcing members outlined on the exterior surface was overcome by a very simple expedient. Noting that the actual shrinkage in a number was small and that they never swelled, the reinforcing pieces were cut to fit flush with the form or approximately 1/64-in. small assuring that the surface irregularity would be a depression. After installing the part in its groove the skin veneers were applied and finally an extra strip of veneer was applied to the outside as a local additional layer over the reinforcing member. (Figs. 4a and 4b.) After molding this bond provided an excellent and thoroughly bonded "filler" which could be shaved flush without injury to the structure or skin. Obviously the proper thickness of strip is the sum of the undersize plus the shrinkage.

There is an apparent tendency at this time to return to early plywood aircraft as a guide in deciding the amount, size and location of reinforcing members. While these early aircraft were admirable and serviceable articles the reinforcing arrangement was quite often determined by other than structural reasons. Primarily these craft were designed for construction of flat plywood which was soaked or steamed and then forced into the desired shape. In order that this shape be retained during the life of the article it was necessary that the framing be of sufficient substance and rigidity to resist the tendency of the plywood to return to its original flat condition. A primary consideration therefore was the jig-like rigidity necessary in the internal structure. Additional intercostal stringers were then installed to comply with the dimensional limitations of the plywood then obtainable. Credit is indeed due to these designers for their ability to construct aircraft of high performance with the essentials of a jig built into them.

Molded shells have the very distinct advantage over flat bent plywood of retaining their molded shape without the aid of structural reinforcement. Additionally the "stock size" limitation is removed, thus eliminating the need for members whose primary purpose is the provision of a skin splice backing. In designing molded articles the only reinforcing necessary is entirely structural. Frames are necessary to distribute major structural loads into the shell, to reduce the column length of stringers and to prevent skin buckles. Load supporting frames should be designed as redundant rings in a manner quite similar to a metal frame. The proper width of frame is proportioned to maintain the stress on the glue joint between the skin and the frame below the maximum allowable value. The depth of the frame may be varied to correspond to the bending stresses along the frame axis.

The decision to use stringers or increase the shell thickness must be governed by comparative weight studies and relative cost estimates. In order to assist the cost estimates it might be noted that the material, labor and overhead cost of veneer in a molded aircraft structure is approximately 11c. per sq. ft. or, with usual veneer thickness and weight about $1 per lb. On an equivalent labor and material market stringers of solid spruce may be estimated on the basis of 43c. per lb. Economically it usually is better to reinforce a shell rather than thicken it. Most comparative weight estimates on specific structures have also indicated the desirability of using stringer which may be tapered without unreasonable cost but an appreciable weight saving. It should be noted that the above estimates are comparative only and not indicative of the actual cost of finished articles. The number of variables governing the cost of any particular article is infinite.

Structural Arrangement

Basically any aircraft structure, regardless of material, is a system of bending and shear resistant parts joined into a structural entity. Sound design requires the quantitative evaluation of the external loads and the careful determination of the resultant shears, moments and torsions occurring at critical points. There is a clear line of demarcation at this point where consideration must be given to the provision of a well defined and continous force and shear flow path. Provision of these paths would be simple if the structural arrangement were the primary consideration. Unfortunately, the structure must be subordinated to other requirements and the clear and obvious structural paths are lost. Door cut-outs, wheel wells, access holes, and disassembly joints then exercise substantial control over the structural arrangement. Choice of stringer and frame location then becomes a matter of available space as often as a question of expediency of structural economy. In a wing for example, the space left in the center section after wheels, gear, etc., have been retracted is then turned over to the structuralist with practically complete freedom to use all of it.

This freely given space seems to consist usually of a hole 2-in. wide by the depth of the wing. The headaches inherent in hanging a 40-ft. wing span on this undoubtedly accounts for the sometimes sour disposition and appearance of the structures group. The forces outboard must somehow flow through this space and hence the material must aim at this space from the wing tip. The influence on the arrangement of material outboard is profound and is the reason for many otherwise unaccountable wing structures.

Where sufficient space is available through the center section it is possible to take full advantage of the low density of molded plywood and approach the ideal of a completely skin stressed wing. It has been possible to construct good wings on this basis with ribs at concentrated load points only and without the use of leading edge ribs or a forward shear web. (Fig. 6.) Loadings on such wings have been successfully carried as high as 540 psf. average with the usual airfoil chord distribution. Despite the almost complete absence of internal structure in a particular wing of this arrangement the distortion was extremely small and the spanwise deflection and twist entirely normal during static tests.

The guiding principle in constructing such a wing is the provision of sufficient flange material to carry the bending moments and sufficient web material between the flanges to transmit the shears. This flange material is located as far as practicable from the neutral axis and hence becomes relatively thin. Additional material to carry the increased bending moments towards the root of the wing is supplied by increasing the flange width and permitting the flange thickness to remain constant. The shear may be carried through the leading edge skin which will then be of sufficient rigidity to prevent buckling without the assistance of nose ribs. The ability to carry the loads without buckling is inherently present in most low density webs due to the greater thickness of material for a given strength and weight.

Location of stringers in a fuselage is influenced by engine mount attachments and wing locations. In general it is preferable to use a small number of large stringers. The larger stringers have larger radii of gyration and permit greater spacing between frames. The resulting larger areas of unsupported

(*Turn to page* 315)

Design and Installation Factors For Aircraft Hydraulic Accumulator Systems

Various types are analyzed in relation to ease and speed of maintenance, a consideration which must be included in both construction and location.

By EDWARD M. GREER,* *Aircraft Hydraulic Engineer*

ALTHOUGH A NEWCOMER in aircraft applications, hydraulic accumulators have been used extensively in stationary hydraulic systems from almost the earliest days of hydraulic actuation. Due to the far reaching use of hydraulic equipment in contemporary military aireraft, hydraulic accumulators have been developed to meet the increasing need for an emergency source of fluid power and to speed hydraulic action.

Specifically, an accumulator is a fluid pressure storage chamber and can be likened to a storage battery in electric circuits. It is a means of storing energy to be called upon as a source of power when the regular means of creating the necessary power, such as the generator in the electrical system and the pumps in the hydraulic system, are rendered inoperative or lack the capacity to do a particular job when called upon. In either case the potential energy stored in the unit can be called on automatically to operate the system whenever required.

The size of the accumulator depends upon the amount of stored fluid necessary to meet specific requirements set up by the design of the particular airplane in which the accumulator is employed. This is governed by any one or all of four elements as follows:

1. Pressure regulation—In hydraulic systems which employ constant displacement pumps, a pressure regulating valve is used to regulate the system pressure at a predetermined operating pressure of the particular hydraulic system. In most American airplanes this pressure is set at 1,000 psi and the regulator is set so that at this pressure the volume of oil displaced by the pump is bypassed into the return line leading to the reservoir at no pressure, while the operating pressure is maintained in the system beyond the regulator. This is called "unloading." When the pressure in the system drops due to leakage or actuation of one of the units and reaches a predetermined pressure (in this case 800 psi.), the regulator valve automatically closes the bypass into the reservoir and feeds the flow into the system until the 1,000 psi. pressure limit is again reached. This is called "loading." It may be of interest to state here that although current systems are operating at pressures between 1,000 and 800 psi., the majority of new designs are operating between 1,500 and 1,350 psi.

Due to internal leakage of the unloader or regulator valve, plus internal leakage in the valves and actuating system, the regulator valve tends to load and unload very rapidly. In some cases it operates as frequently as every second. This results in shocks and vibrations which could tear lines from their fittings and do great damage to the system.

To compensate for this leakage, an accumulator is incorporated in the system as near to the pressure port of the regulator valve as possible, and of sufficient capacity to widen out the unloading periods of the regulator to at least ½ hr. and absorb any hammer that might occur in the automatic action of the valve. In general, the smallest commercial aircraft accumulator size of 69 cu.in. is more than sufficient to do this work.

2. Auxiliary to pumps—In most military applications, actuation such as landing gear retraction, dive flap operation or gun charging must be completed in a minimum of time. It may be beyond the capacity of the pump to supply a sufficient quantity of fluid under pressure to the actuating cylinders to do the job in the time limit allowed. Here the system accumulator is called upon to supply the extra push required. Depending upon the size of the airplane and the services which the hydraulic system is required to fill, either the 220- or 515-cu.in. commercial size can be used in place of the 69-cu.in. unit discussed in connection with condition 1.

3. Emergency operation of hydraulic system—It is conceivable in military applications that the main source of hydraulic power supply, the pump, may be rendered inoperative either by engine failure or failure of the pump itself. It is, therefore, required in a great many military aircraft that the system accumulator be of sufficient capacity to completely operate the landing gear and flaps at least once, and to operate the power brakes a sufficient number of times to insure a safe landing.

4. Secondary hydraulic systems—Many of our larger bombers and heavily armed aireraft employ secondary, complete hydraulic systems operated by their own pumping units independent of the airplane powerplant. The greatest application of this type is the modern gun turret. In this case an accumulator is placed in the system to aid the speed of turret operation. A very recent application of the same type has been the use of an accumulator in the hydraulic system of the hydrodynamic propeller. This was found necessary because the greatest need for hydraulic power to change the pitch of the propellers arose when the engines were turning slowly. Consequently the hydraulic cylinder received an insufficient quantity of fluid to meet the time requirements for actuation.

* The author wishes to acknowledge his appreciation to Miss Alice P. Zucker for her research work on the material which made up this paper and to thank her for her contribution to this article.

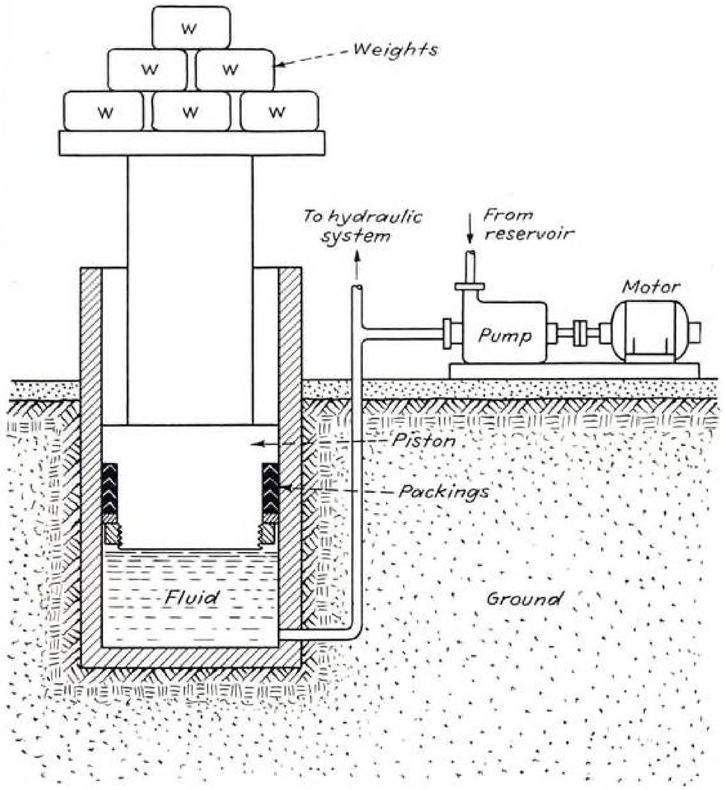

Fig. 1. Gravity type accumulator.

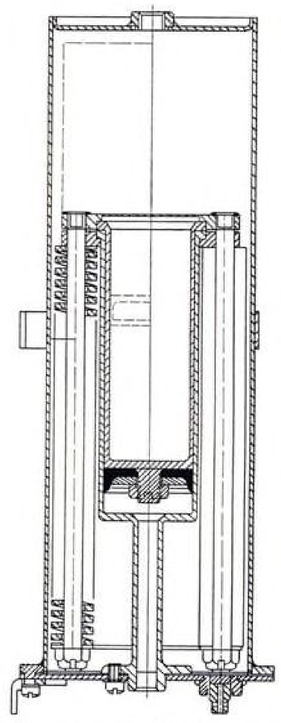

Fig. 2. Spring-loaded accumulator (Air Associates, Inc.)

Fig. 3. Industrial spring-loaded accumulator.

Development of the Accumulator

In order to appreciate and understand the applications of any product, some knowledge of its background and development is necessary. The earliest form of accumulator, known as the gravity type accumulator, is still used in stationary industrial applications today. This accumulator consists of nothing more than a close-fitted piston mounted vertically in a ground cylinder. There is a platform on top of the piston on which heavy weights are placed to correspond with the pressure required in the fluid pumped into the underside of the piston (See Fig. 1). The greatest advantage of this type accumulator is that gravity does the work and that the pressure is constant regardless of the quantity of fluid in the fluid chamber of the accumulator. This latter is a characteristic not found in any other type.

Although perfectly acceptable in stationary plants, it can readily be seen that for mobile applications this type accumulator would not be practical. In order to accumulate sufficient fluid under pressure such a device would be far too heavy and cumbersome for use. Consequently, for use in a dump truck, bulldozer, machine tool and eventually in aircraft a spring-loaded accumulator was developed which is still in use. As shown in Figs. 2 and 3, the spring-loaded accumulator consists essentially of a piston closely fitted in a ground cylinder. A disk is mounted on the piston rod and a series of pre-loaded springs is attached to this disk in such a manner that as the piston rises the springs are further loaded. As in the previous type accumulator discussed above, a fluid chamber under the piston connects to the pump and hydraulic system.

Fig. 4. (Left) Pressure tank accumulator. (Douglas Aircraft Co.) Fig. 5. (Right) Floating piston accumulator (Boeing Aircraft Co.)

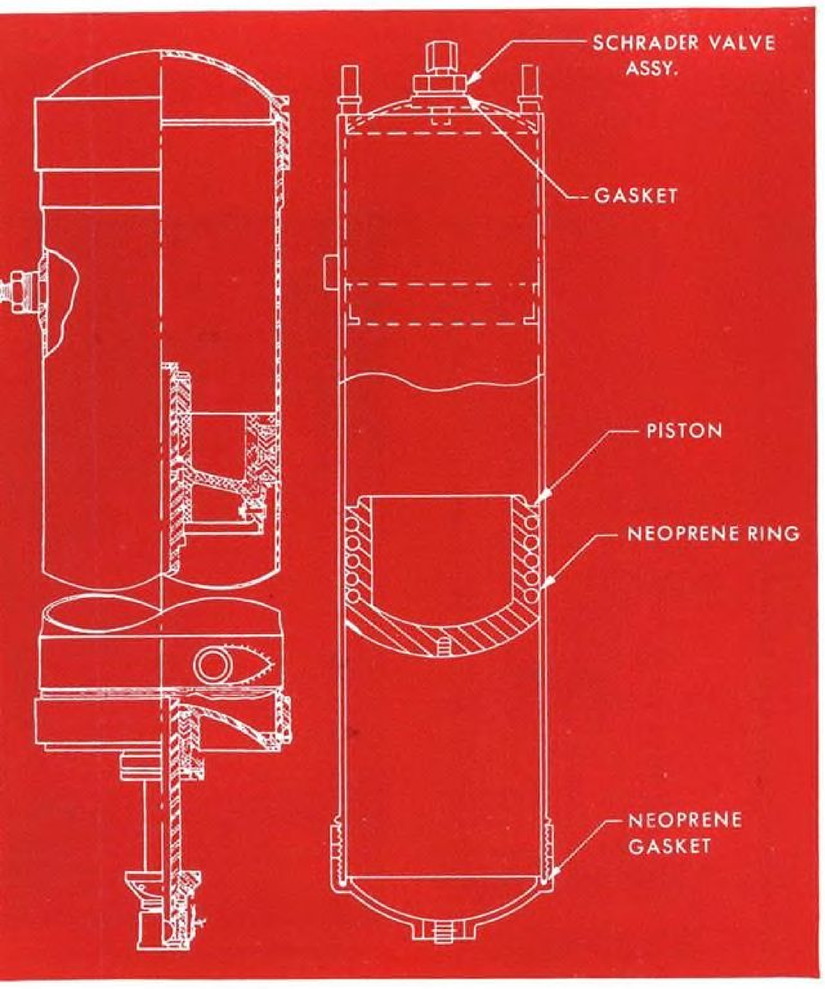

The great disadvantage of this type accumulator is that a very small quantity of fluid can be stored to be called on to do useful work. In many cases this is as little as a few cubic inches. Therefore, in most applications the spring-loaded accumulator is used merely to prolong the periods between unloading in the pressure regulator.

As the size and speed of aircraft advanced, the demands on hydraulic actuation progressed to a point where large volumes were required from hydraulic accumulators. In order to meet these requirements for large volumes of accumulated fluid under dynamic pressure, the air-loaded accumulator was developed. The Douglas Aircraft Company, long a leader in the development of hydraulic actuation in the aircraft industry, developed its first air-loaded accumulator for the DC-3. This accumulator is still in general use on all our major commercial airplanes. The Douglas accumulator shown in Fig. 4 is of the piston type, patterned in design after the typical actuating cylinder as used in hydraulic applications. This accumulator consists essentially of a piston fitted closely to a ground and honed cylinder. A piston rod connects to the piston which extrudes through the lower head of the assembly and is sealed from leakage by means of a V-type packing box in this head. The cylinder is closed on the upper end by a cylinder head which screws onto the cylinder with appropriate seals to prevent leakage. A shock strut type air valve is mounted near the top of the cylinder through which a pre-load charge of air or nitrogen can be introduced. An oil port at the bottom of the cylinder allows oil to be pumped into the lower chamber. The piston itself acts as a separator between the air and oil chambers and contains suitable packings to prevent leakage or mixture. The piston rod extends outside the cylinder so that it acts as an indicator as to the quantity of oil accumulated in the unit.

Although this type accumulator represented a great stride from previous designs, it was quite troublesome from a service and maintenance standpoint. The packings deteriorated and leaked and have been from the beginning a source of constant trouble. It was as a result of the experience gained in this accumulator that the spherical diaphragm type accumulator developed.

However, inasmuch as the Floating Piston Accumulator is in general design the same as the unit discussed above, and since this accumulator is in use in many aircraft today, special attention must be given it here. As can be seen in Fig. 5, this device consists essentially of a piston containing the newly developed "O" ring packings, closely fitted to a honed cylinder which is closed off on each end with suitable cylinder heads which in turn contain packings to prevent external leakage. One cylinder head contains a shock strut type air valve, the other contains the oil intake port.

The Floating Piston Accumulator is fundamentally sound in design and as a result of the development of the round ring packing technique it gives satisfactory service from a maintenance standpoint. The greatest disadvantage of this unit is its increase in weight over the diaphragm type accumulator. Also, in some cases the cost of manufacture is higher than that of the diaphragm unit.

The most popular type of accumulator used in aircraft hydraulic systems today is the spherical diaphragm type. This

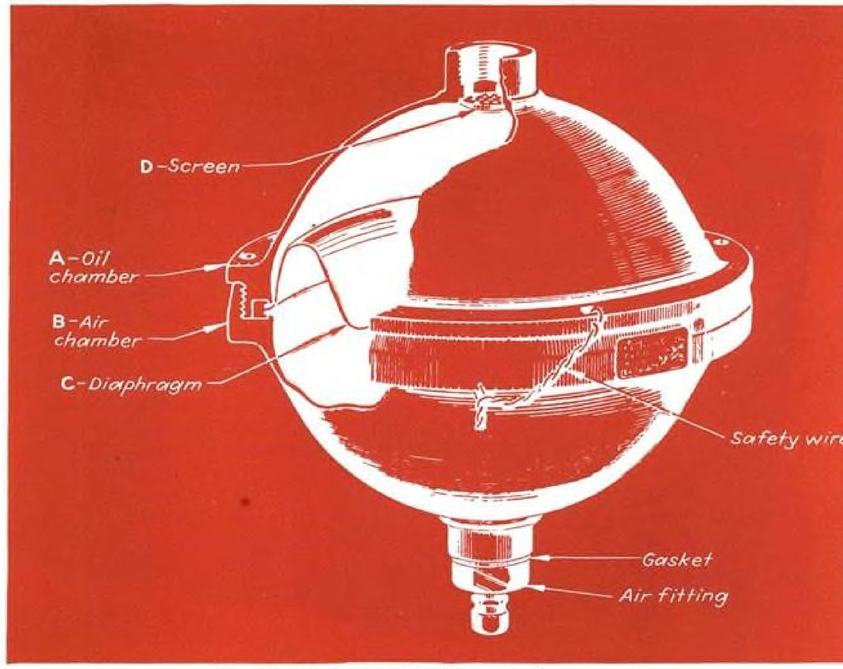

Fig. 6. Spherical accumulator (Vickers, Inc.)

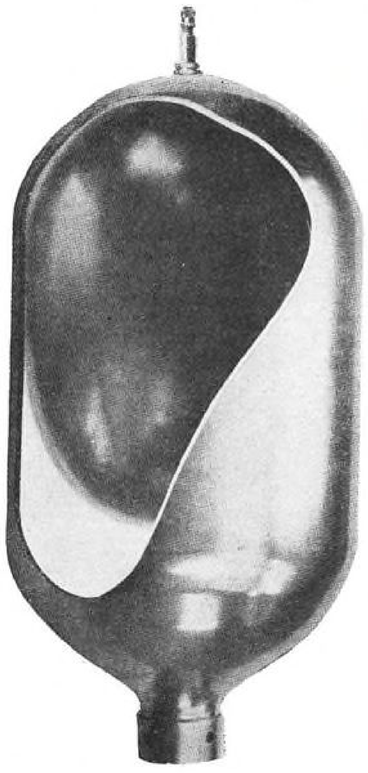

Fig. 7. Bottle type accumulator (Simmonds Aerocessories, Inc.)

accumulator type was developed by the Douglas Aircraft Company as an improvement over their cylinder type unit. This company and its subcontractors have been producing a large quantity of these units for the use of the Douglas company as well as for use by other aircraft manufacturers. This accumulator consists essentially of two dural hemispheres, bolted together to form the housing. A synthetic rubber diaphragm, mounted as a divider between the two hemispheres, separates the accumulator into two chambers—one for air, one for oil. A boss at the pole of each hemisphere contains either the air intake valve or the oil port.

Today Vickers, Inc., supplies the aircraft industry with the most widely used of these spherical accumulators. Their unit, shown in Fig. 6, consists of two hemispherical steel shells screwed together, and it contains a synthetic rubber diaphragm which separates the hemispheres. Generally speaking, the Vickers unit is identical with the Douglas accumulator. The exception is that the Vickers unit is made of chrome molybdenum forgings screwed together as compared to the bolted dural housings of the Douglas product. However, the Vickers accumulator has definite advantages in weight saving and ease in maintenance.

The Simmonds Aerocessories, Inc., bottle type accumulator is the latest design to enter the field. This component was designed principally to meet the high production needs brought about by the war. Special emphasis in design is placed on simplicity, ease in manufacture and maintenance. As illustrated in Fig. 7, the Simmonds accumulator is of the air-loaded bladder type consisting primarily of a steel shell or housing, a fully enclosed synthetic rubber bladder, molded to a high pressure (automotive tire type) air valve, a dural plug containing a number of strainer holes on one end, a closure nut and synthetic rubber packings.

The housing is of one piece construction (containing no welds or brazed joints) made from steel sheet drawn into a cup and then spun into a bottle. The bladder, the first and only fully enclosed synthetic rubber unit of this type made in this country, is specifically designed to give high volumetric efficiencies and long life.

Principles of Operation
Air Loaded Accumulators

Inasmuch as aircraft hydraulic accumulators are all of the air-loaded type, the principles of operation of this type only will be discussed here. These principles cover not only the diaphragm and bladder types but also the floating piston type.

In operation air is pumped into the air chamber through the air valve to its pre-load pressure requirement. Then oil is pumped into the oil chamber through the oil port. The first drop of oil which enters the accumulator must displace the equal volume of air above the piston or diaphragm. Therefore, it must enter at the pressure precharged into the air chamber. As the oil is pumped farther into the accumulator the piston or diaphragm rises,

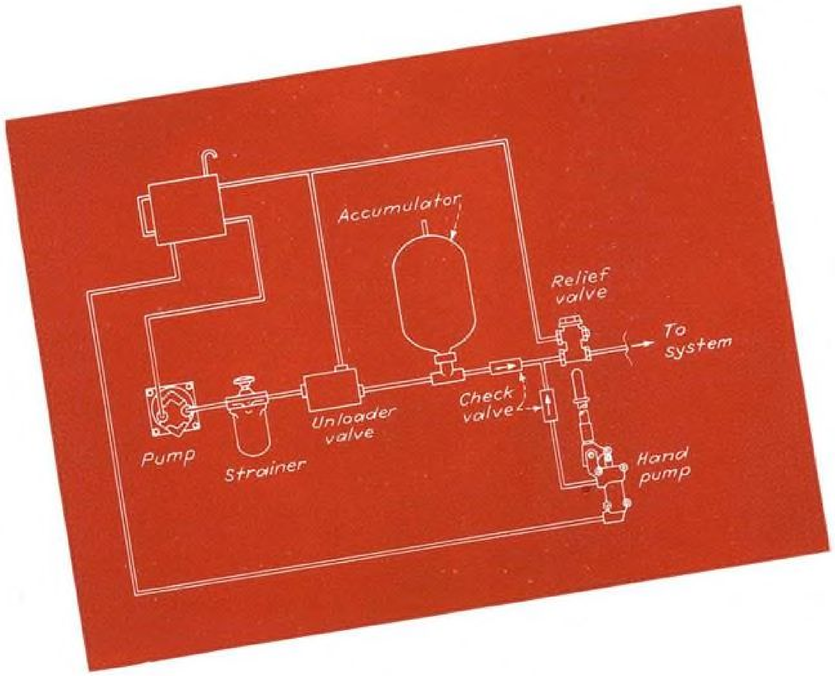

Fig. 8. Schematic diagram, hydraulic accumulator.

thus compressing the air in the chamber above it so that at all times equal pressure exists between the air and oil. This pressure is transmitted throughout the hydraulic system which is connected to the pressure side of the accumulator.

Inasmuch as oil is incompressible, the air or nitrogen under pressure acts as a dynamic force in the same way as a spring to maintain the pressure in the accumulator and to force it out under pressure to do work on the hydraulic system. It should be noted here that as the fluid is discharged from the unit, the air expands and the pressure drops. For this reason the pre-load or initial air charge plus the volume of the accumulator must be sufficient to do the work required from the accumulator.

For use in aircraft the "pre-load" or initial air pressure charge has been arbitrarily set at one-half the working pressure, and volume of oil accumulated, calculated so that at the lowest pressure of the fluid complete actuation has taken place. It is unfortunate that the pressure drops as the oil flows from the accumulator into the actuating unit since it is near the end of the stroke of the actuating cylinders that the most pressure is needed in the majority of installations. This results in the use of accumulators which are rather large

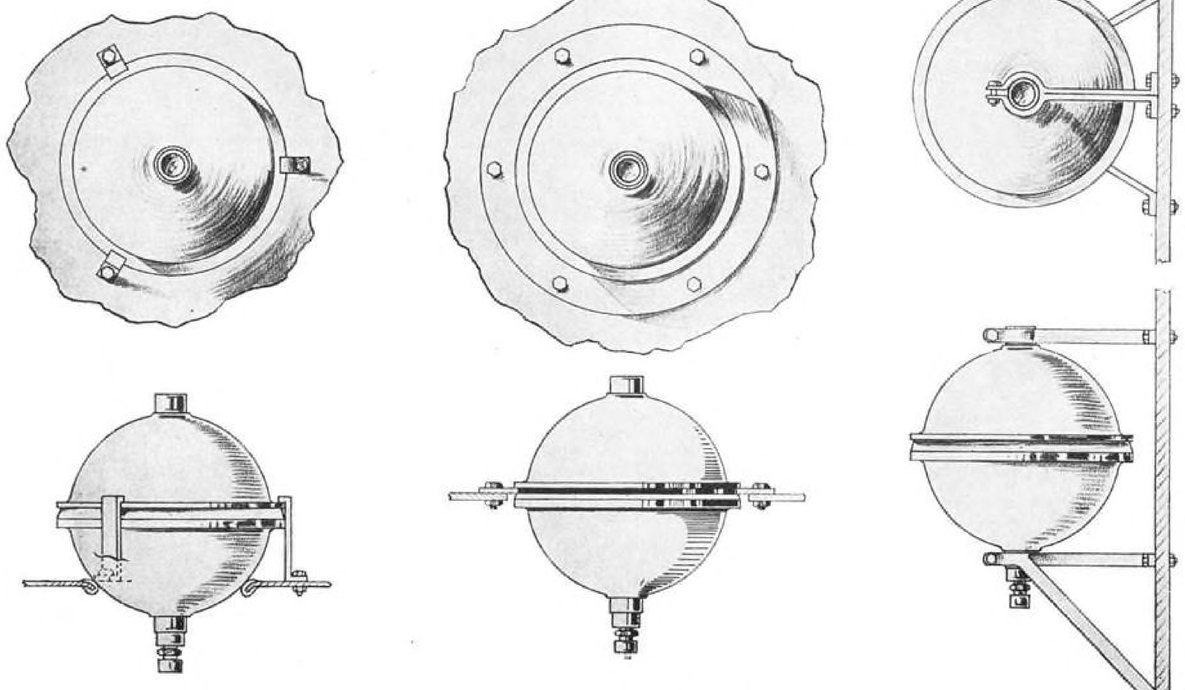

Fig. 9. Mounting of spherical accumulators.

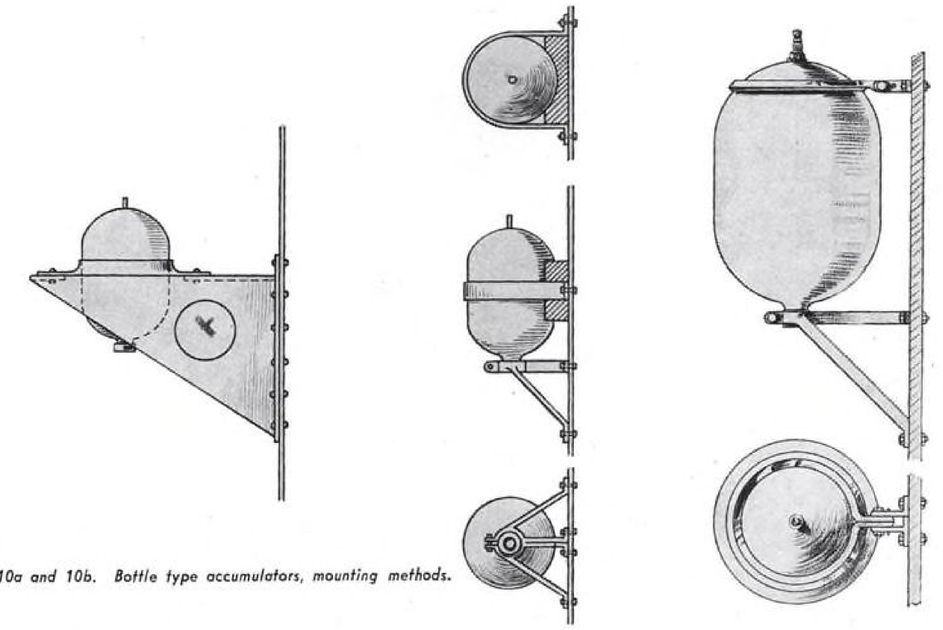

Figs. 10a and 10b. Bottle type accumulators, mounting methods.

in capacity but are not used generally to the full capacity of their oil chamber. In cases where the full capacity of the accumulator is used, the actuating cylinder diameter is large enough so that at pre-load pressure a complete stroke against the resisting load can be accomplished.

Fortunately in operation the compression and expansion of air in the accumulator is slow enough so that the heat developed can be disregarded in the calculation of volume requirements. Therefore, Boyle's law for gases, $P_1 V_1 = P_2 V_2$, can be applied to determine the air volume requirement. This air volume subtracted from the total volume will give the accumulated oil volume. For example:

If we have an operating pressure of 1,500 psi. and choose a pre-load of 700 psi. need a total volume of 225 cu.in between 1,500 and 700 psi. for complete operation of the hydraulic system. What size accumulator is needed?

We know the air pressure and volume vary as $P_1 V_1 = P_2 V_2$

P_1 = Precharge pressure = 700 psi.

V_1 = Total volume of accumulator as at pre-load (Accumulator is completely full of air)

P_2 = Operating pressure = 1,500 psi.

V_2 = Air volume at 1,500 psi.— $V_1 - 225$ cu.in.

because we require 225 cu.in. of oil the rest of the accumulator being air

$\therefore 700 V_1 - 1{,}500 (V_1 - 225)$

$= 1{,}500 V_1 - 337{,}500$

$800 V_1 = 337{,}500$

$V_1 = 422$

∴ Choose nearest commercial size which is 515 cu.in. and redesign the minimum to a higher level keeping pre-load pressure as is.

To determine pressure available after 225 cu.in. of oil has been exhausted from the accumulator, proceed as follows:

$P_1 V_1 = P_2 V_2$

$700 \times 515 = 1{,}500 V_2$

$1{,}500 V_2 = 360{,}000$

$V_2 = 240$ cu.in. air

Volume oil = 515 — 240 = 275 cu. in.

after exhausting 225 cu.in.

Volume oil = 275 — 225 = 50 cu. in.

Pressure available with 50 cu.in. oil accumulated

$700 \times 515 = P_2 (515 - 50)$

$360{,}000 = 465 P_2$

$P_2 = 775$ psi.

∴ The system can be designed for a minimum operating pressure of 775 psi.

Installation of Accumulator

In order to save weight in oil and tubing it is best to install the accumulator as close to the hydraulic pump as possible. Since the pump is generally mounted on the engine, it has been found in most applications, the best location is in the nacelle section generally on the firewall directly behind the engine. Also, in this location the heat of the engine aids the operation of the hydraulic system in keeping the accumulator warm in sub-zero flight conditions. In addition, there is the added advantage of lessened vulnerability to gunfire inasmuch as bullets would have to pierce the engine to get to the accumulator in frontal attack or go through the armor-plated pilots' compartment in rear attack. For most efficient operation of the unloader valve, the length of tubing between it and the accumulator should be as short as possible.

A typical installation showing the power circuit in schematic diagram is shown in Fig. 8. In this figure it can be seen that the accumulator is placed between the unloader valve and the relief valve. For ease in handling and servicing the accumulator can be mounted on a panel with the unloader valve and strainer. This panel assembly forms a unit which can be mounted on the airplane and removed as a unit for servicing.

Based on a recent series of tests made with a transparent lucite accumulator, it is the opinion of the writer that wherever possible the hydraulic accumulator should be mounted in a vertical position with the air chamber above the oil. When the accumulator is mounted with the air chamber below the oil, the forces set up by the buoyancy of the air and its attempt to rise above the oil set up severe stresses in the diaphragm and generally distort it. This cuts the life of the separator a great deal. On the other hand with the air above the oil, the action of the separator is smooth and takes its normal, designed shape in the accumulator. Aside from this it is generally easier to get to the air valve for preloading when it is on the top end of the accumulator. It has been found in these tests that almost 100 percent efficiency can be obtained with the air above the oil, and any air that may enter the accumulator from

(*Turn to page* 311)

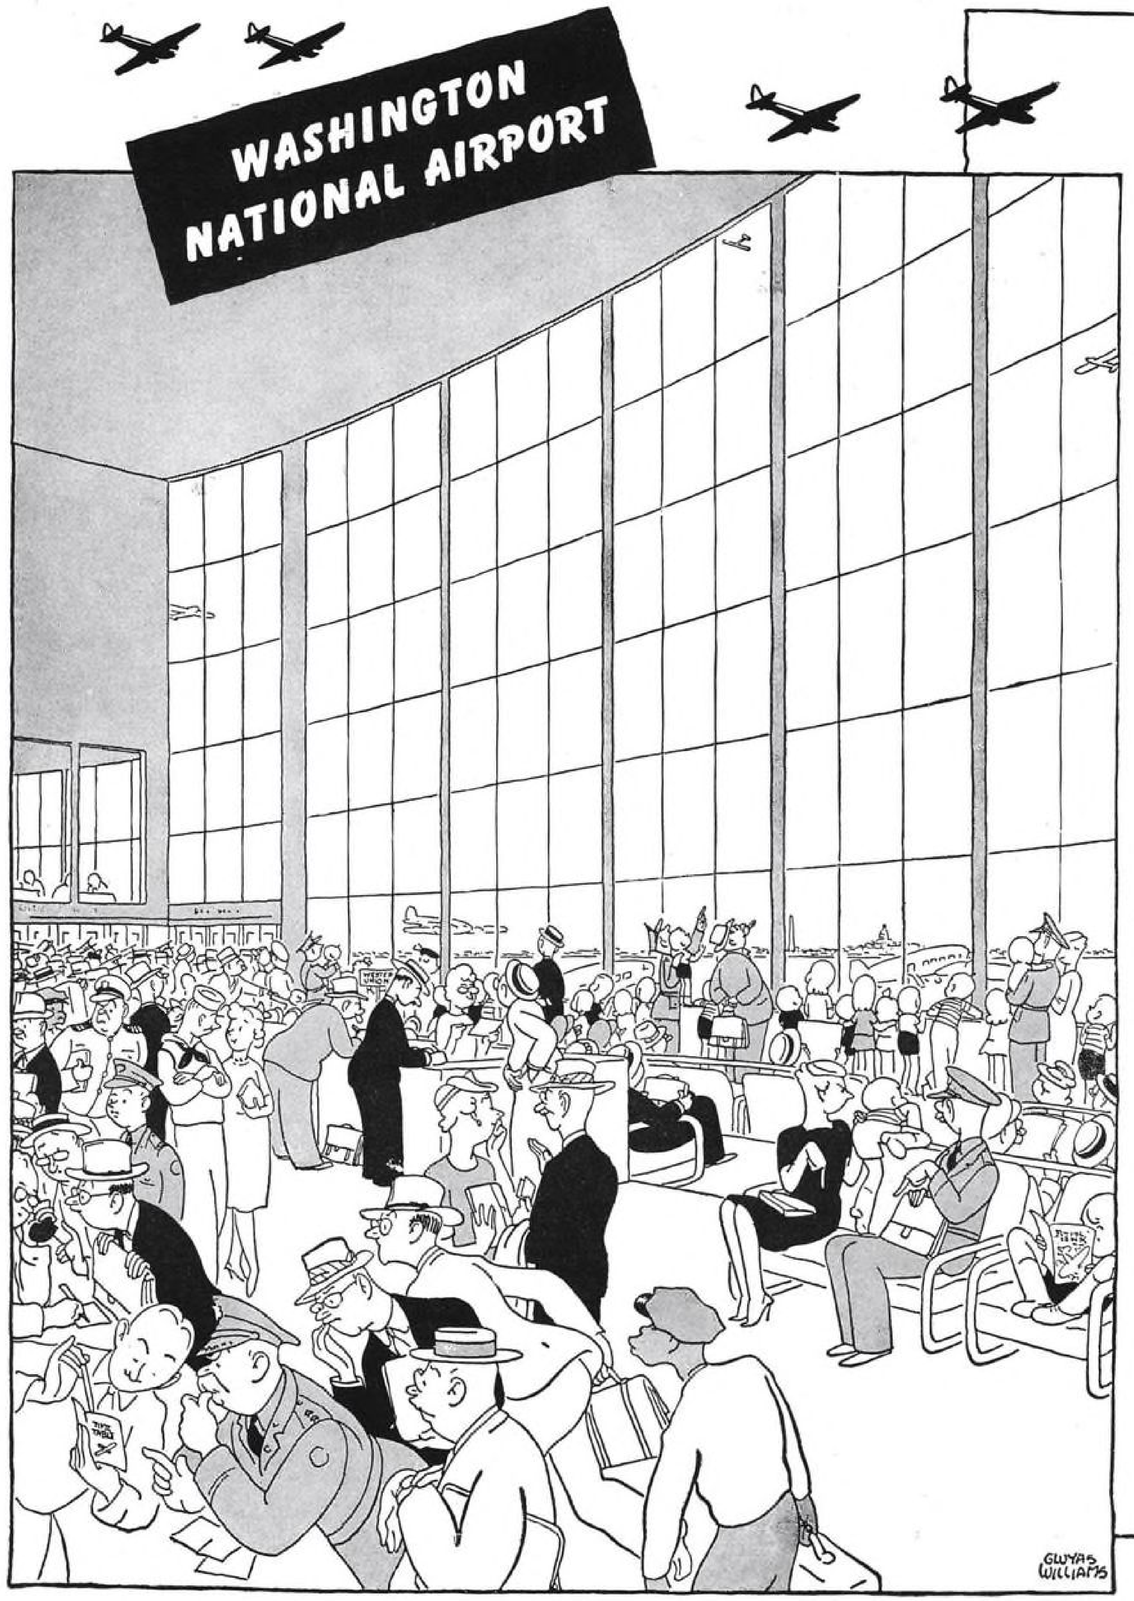

← Illustration courtesy The New Yorker Magazine

...WHERE PLANE TRAFFIC IS BUSIEST
CUNO FILTERS PROTECT ALL FLIGHTS

1201 take-offs and landings in one week at the National Airport — where three leading airlines, American, Eastern, and Pennsylvania Central, converge on the nation's capital.

Every plane was checked — and *every plane* was found equipped with Cuno Filters, assuring constant flow of clean fluids to vital parts.

Cuno was the first, you know, to develop filters for positive, uninterrupted removal of sludge in aircraft engine lubrication. As a result of continuing collaboration with aeronautical designers, other aircraft fluid systems, such as hydraulic control, supercharger lube, and glycol heating systems, are now also Cuno-protected.

Today, most engine and aircraft builders use Cuno Filters because they provide non-stop protection . . . because their dependability has been proved by millions of miles in the air . . . and because the maintenance problem has been reduced to a minimum.

CUNO . . . A SAFE SHORT CUT IN MAINTENANCE

Cuno Filters are continuously cleanable, and operate without attention for much longer than the longest flight. Our maintenance-advisory staff, working closely with service depots, has conclusively established the speed and ease with which Cuno installations are kept at top-flight performance.

COMPLETELY AUTOMATIC FILTRATION

Cuno's self-cleaning filter was developed with the assistance of prominent aviation engineers. Mounted on the filter is a tiny hydraulic motor powered by the oil it helps to keep clean. By this means the filter element is continuously rotated past cleaner blades which positively comb out all imbedded as well as adherent solids — automatic protection against sludge and undesirable solids as long as the system is under pressure.

CUNO ENGINEERING CORPORATION
712 South Vine Street
Meriden, Connecticut

KEEP FLOW ON "GO" WITH
CUNO
THE "FILTER-FINE" STRAINER

FABRICATING DROP HAMMER DIES

Some new ideas applied to an old technique facilitate handling and efficient utilization of drop hammer dies.

By CHRIS J. FREY,
Brewster Aeronautical Corp., and

STANLEY S. KOGUT,
Eastern Aircraft Production Forum

Although the present article describes graphically the standard procedure in the fabrication of dies, several innovations are explained which speed production materially.

These are the clamping lugs, cast integrally with the dies, removable dowels which provide convenient attachments for handling and removable studs which simplify storage.

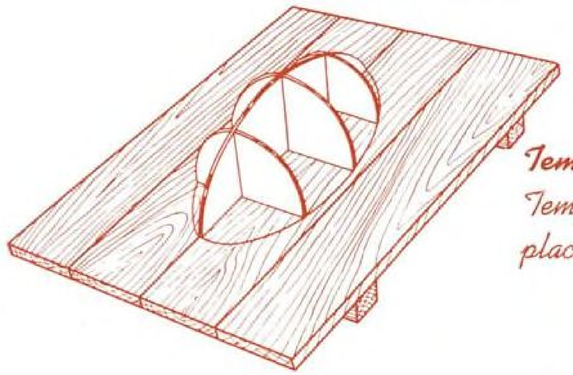

1.

Template skeleton

Template skeleton of part to be made is placed on a board. Plywood may be used.

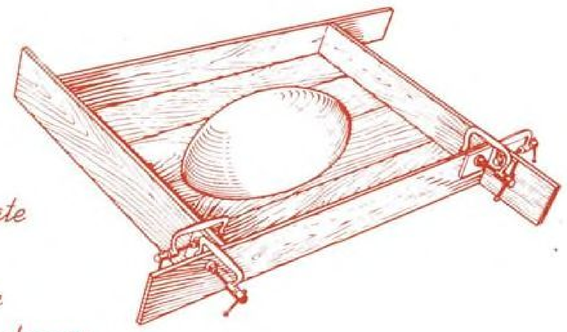

2.

Plaster model (in form).

Plaster is packed in around the template to form the model which is then surrounded by a box whose size can be adjusted by means of angle irons and clamps. Sides of box should slant outward at an angle of about 3°. Clay, plaster or wood may be used for pattern.



3. Plaster pattern section showing lifting bolts in place.

The frame is then filled with plaster into which a set of nuts and bolts are suspended by means of an angle iron. This is used to draw off the pattern.

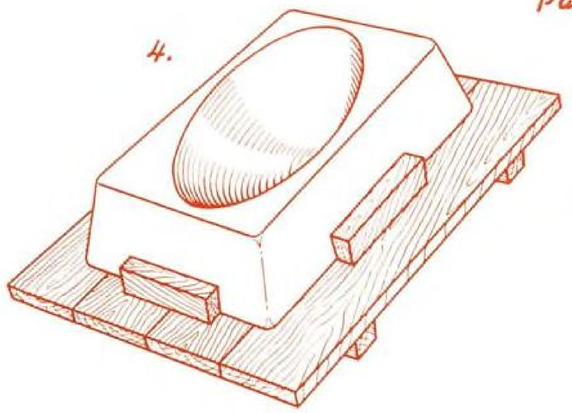

4.

Pattern on bottom board of flask showing blocks for clamping lugs.

Bolts are screwed out but nuts are left in. Plaster pattern is laid on a board with pieces of wood around it. These will later form clamping lugs.

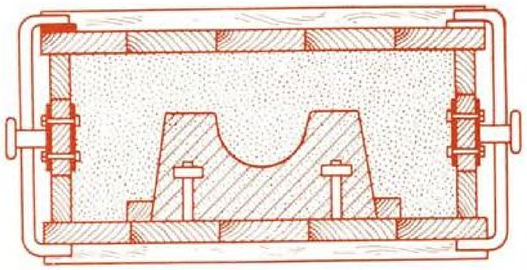

5.

Assembled flask—with sand. Note clamps in place.

Flask is placed on bottom board surrounding the plaster pattern. It is packed with sand and covered with another board. The studs on the side of the flask are centered so as to provide an easy means for turning it over.

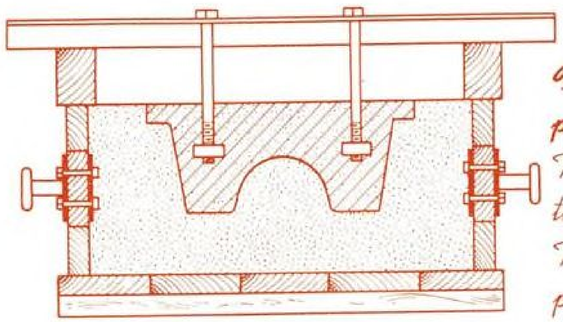

6.

Flask inverted—ready for removal of pattern.

The assembly is turned over and the board that was formerly on the bottom is removed. The angle iron is used to draw out the plaster pattern.

Sand mold with pins to create lifting pin holes—gates ready for pouring.

Steel dowels coated with graphite are inserted into the sand at an angle. Pouring gates are cut and metal is poured.

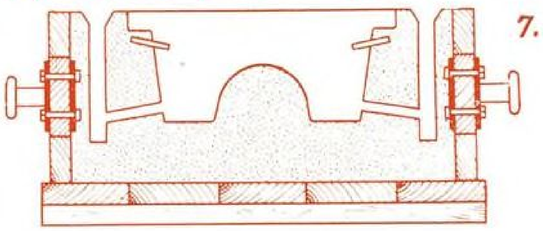

7.

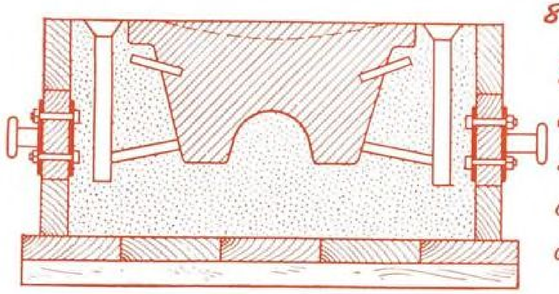

8.

Die in sand—showing cavitation that must be corrected.

Shrinkage generally takes place during cooling and more metal must be poured to obtain a flat bottom for the die.

9. **Completed die ready for punch.**

After cooling the die is removed. The dowels can be easily removed from the die for reuse in other molds. Pins on sling are inserted into the holes for lifting. Note clamping lugs.

10.

Adjustable steel frame around die—ready for pouring. Bolt spacing fixture in place.



An adjustable steel frame is placed around the die, fastened with wedges, over size removable studs and nuts suspended in it and the Lead Antimony punch is then cast into the die.

Studs can be removed for reuse—die storage is facilitated.



11. **Completed punch and die.**

Standard studs in punch.

12. **Manufactured part.**

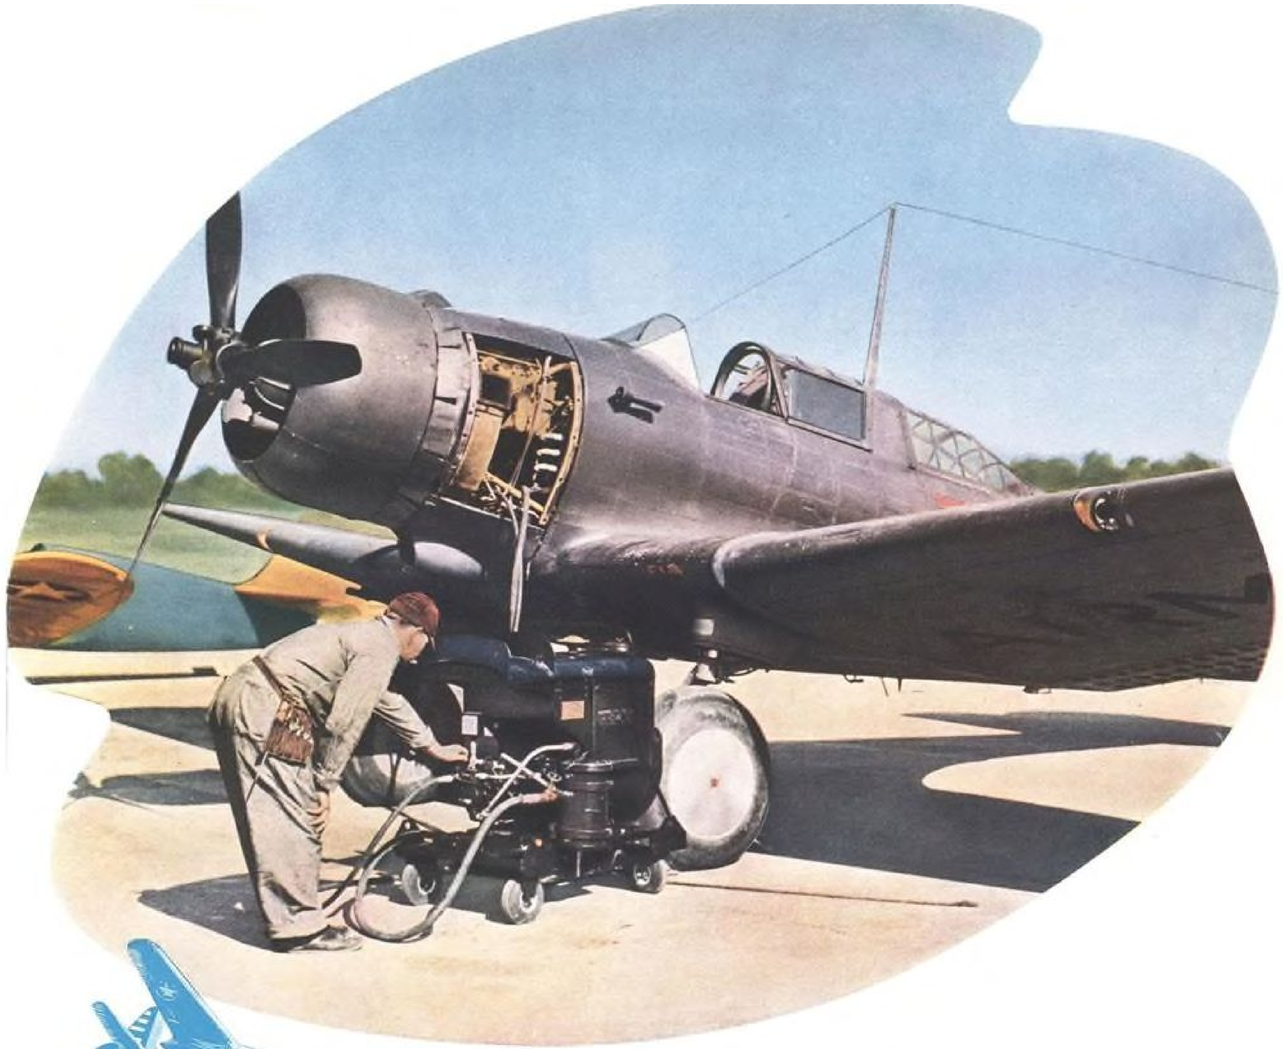

AVIATION'S NEW RIGHT HAND... at work!

Aviation's New Right Hand is busy getting them into the air and seeing to it that they stay in the air.

From the production of aircraft engine crankshafts to actual maintenance tests in the combat zone, Denison HydrOILics is becoming more and more important in America's drive to keep 'em flying . . . in helping build and maintain the world's finest air force . . . in protecting craft and crews against accidents.

On this page is an example of one of the ways oil hydraulics is helping out on tough jobs . . . a Denison HydrOILic test stand checking the hydraulic circuit of an attack plane. Powered by a gasoline engine, and used in the field—or where electric power is not available — it checks aircraft hydraulic systems using extremely high operating pressures. An electric-motor driven unit, illustrated on the following page, performs even additional services. Check the many important tasks in aviation now being handled by . . . . . .

HydrOILics

THE DENISON ENGINEERING COMPANY, COLUMBUS, OHIO

Denison electric-motor driven HydrOILic Test Stand for testing aircraft hydraulic systems using up to 3,000 pound pressures. Self-contained reservoir, accumulator, and valve control provide for testing and adjusting individual units of the system. Twin oil filters, with individual selector valves, are provided.

Denison Burst Test Stand for determining burst pressures of devices in hydraulic systems.



Portable Spark Plug Test Stand for field use, providing a manual mechanical means of subjecting spark plugs to high pressures so that electrical performance can be checked by an auxiliary unit.

HydrOILic Spark Plug Test Stand, for testing aircraft spark plugs in conjunction with an auxiliary aviation ignition tester. Plugs are subjected to selected pressure and high voltage. Automatic control assures voltage passing through the plug only when predetermined pressure is reached, and while readings are made.

Magneto Test Stand, for testing airplane magnetos at speeds from 50 to 6500 r.p.m. Tests can be made at room temperature or, under the dome, at various conditions of heat, humidity, and altitude. Coming-in speeds, insulation, sparking, flashover, voltage-constancy, and shunting resistance can be tested. Operating temperature of the stand can be controlled for making life tests. A similar portable magneto test stand, without altitude equipment, is available for maintenance service.

You'll find Denison HydrOILics producing war materiel in plants all over the country . . . presses assembling critical parts, valves and controls operating important equipment, and test units assuring safe operation. On these pages are eight examples of the new help Denison oil hydraulics is giving just one industry — Aviation.

From these illustrations you'll see why HydrOILics has become the Aviation Industry's New Right Hand. The work of Denison engineers has opened a new range of applications for oil hydraulics, made it a better, faster, and more economical way of solving new problems and improving old methods.

Denison Aircraft Fuel Transfer Valve, used for manual selection of fuel flow from fuel tanks.

Hydromatic Propeller Test Stand, for testing distributor valves and feathering action of Hydromatic Propellers. Valves are checked by a special collar and pressure indicator. With dome installed, tests can be made for feathering action, blade angle, and seal-leaks under high pressures.

Denison HydrOILic Packing Test unit, for testing aircraft hydraulic packings. Static pressure tests, and life tests at selected pressures, can be conducted with this unit. The companion unit, at left, provides for packing tests under controlled temperature conditions ranging from sub-zero to 165° F.

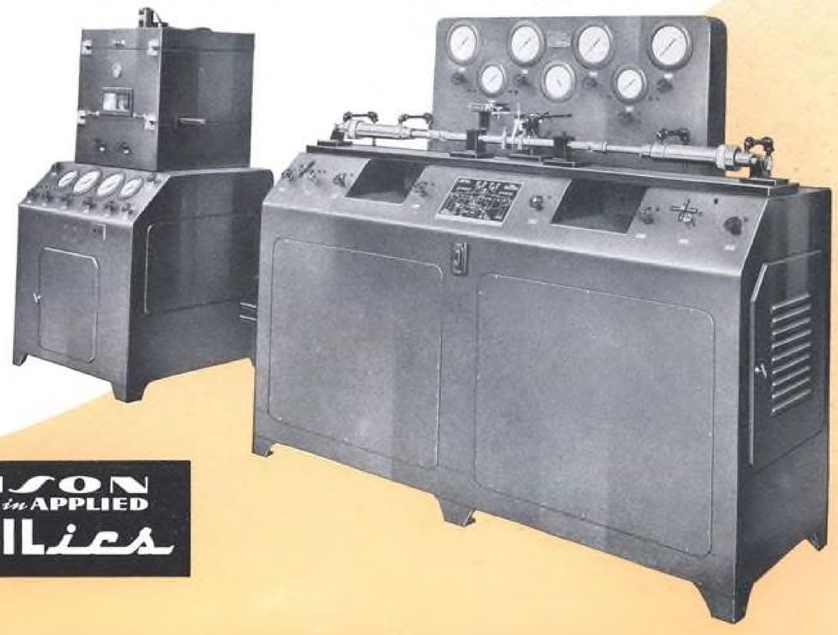

DENISON EQUIPMENT in APPLIED HydrOILics

INDUSTRY'S NEW RIGHT HAND

The advantages of fluid power transmission as applied in HydrOILic equipment for aviation needs, are just as applicable to all industries. Flexibility of application . . . widely variable adjustment . . . precise and positive control . . . all of these sought-for features are being applied by Denison engineers to the already proved advantages of oil-hydraulic power. HydrOILics has truly given industry a *new right hand!*

HydrOILics is hard at work on tasks of pushing, pulling, pressing, tilting, clamping, positioning, and similar operations. It is *pulling* massive units of equipment back and forth into position with quiet ease and complete control . . . *pressing* the toughest metal parts to straighten irregularities of as little as a few thousandths of an inch . . . powerfully *clamping* structural or machine parts to speed up and simplify assembling operations . . . *positioning* large parts or equipment for greater accessibility during production. Ask us how HydrOILics can be applied to *your* specific needs. Call your Denison representative, or write directly to the factory.

This 20-ton Denison horizontal press is doing in 2½ minutes a job that formerly required ten . . . the assembly and disassembly of airplane engine crankshafts. The crankshaft is locked in the fixture in three sections, and HydrOILics does the rest with speed and power, under complete control of the operator. War-rushed plants all over the country are getting help like this from Denison equipment in applied HydrOILics.

DENISON EQUIPMENT in APPLIED HydrOILics

THE DENISON ENGINEERING COMPANY

1166 DUBLIN ROAD COLUMBUS, OHIO

BULLETIN NUMBER DE-5

LEFT: Eric Dudley, of Buffalo, elected national chairman of National Aircraft Standards Committee for year 1942-43, at November meeting in New York. He is in the Curtiss-Wright Airplane Division. . . . RIGHT: John Cramer, Seattle, standards engineer for Boeing Aircraft Co., past national chairman of National Aircraft Standards Committee for 1941-42.

Aircraft Standards Committee Program Keyed to War Needs

Fourth annual meeting of the National Aircraft Standards Committee convened in New York, Nov. 9-13. Groundwork laid for setting up dimensional standards in aircraft raw materials sizes.

By GLEN M. ARON, *Standards Engineer, Northrop Aircraft, Inc.*

"WHENEVER I have had to cannibalize a wrecked airplane to keep another in service, I have offered a prayer that the standards engineers had done their job well!" These words of Tye Lett, Jr., in his article titled *We Learned War Maintenance With the AVG* (page 104), should in this war time be the angel spirit which guides the life and work of every standards engineer in the business.

With the adjourning of the combined National Aircraft Standards Committee in New York City in November, and as each representative to the committee goes home to make his report to his chief engineer, it is time to ask the question of the standards committee and the entire industry, "What authority of position shall we give to standardization in American aircraft, and how strong shall we make the program?"

Everyone who has been delegated to the committee since its feeble start in June, 1939, in Los Angeles, knows that aircraft standards have come a long way. There were Army and Navy standards, with those of industry before the concept of the NASC, and there are seasoned standards in allied industries through engineering societies, committees and institutions all represented in the American Standards Association. The present major standards program for aircraft among the prime contractors began in November, 1940, when the Eastern and Western

(*Turn to page* 351)

Delegates representing major aircraft companies photographed during session of National Aircraft Standards Committee Meeting at Lexington Hotel, New York, Nov. 9-13. Seated—left to right: J. E. Thompson (Vultee); A. M. Stutz (Stinson); Charles Sardou, Jr., vice-chairman, West Coast (Vultee); G. T. Waite, chairman, West Coast (Consolidated); Eric Dudley, national chairman (Curtiss-Wright); W. D. Craig, Jr., chairman, East Coast (Grumman); W. H. Colcord, vice-chairman, East Coast (Kellett Autogiro); E. W. Norris, office of national chairman (Washington, D. C.) and Miss Kelleher (secretary to E. W. Norris). Standing—left to right: Glen Aron (Northrop); L. P. Wood (Curtiss-Wright, Ohio); Lieut. Comdr. A. M. Blamphin (Working Committee of the Aeronautical Board); D. McCalla (McDonnell); C. E. Wingate (Vought-Sikorsky); J. F. Cramer (Boeing); J. H. Gunning (Douglas); J. Perina (Republic); T. P. Hearne (Ryan); J. M. Townsend (Hughes); J. F. Hammond (Boeing); E. E. McCormack (Vought-Sikorsky); M. A. Schulteis (Lockheed); W. M. Smith (Bell); Jerome Gropper (Brewster); J. F. Cox (Vega); John Kay (Brewster); C. T. Torresen (North American); George W. Baughman (Cessna). J. T. Thompson (Martin) and F. M. Salisbury (Douglas), also attending the meetings, were absent at the time picture was taken.

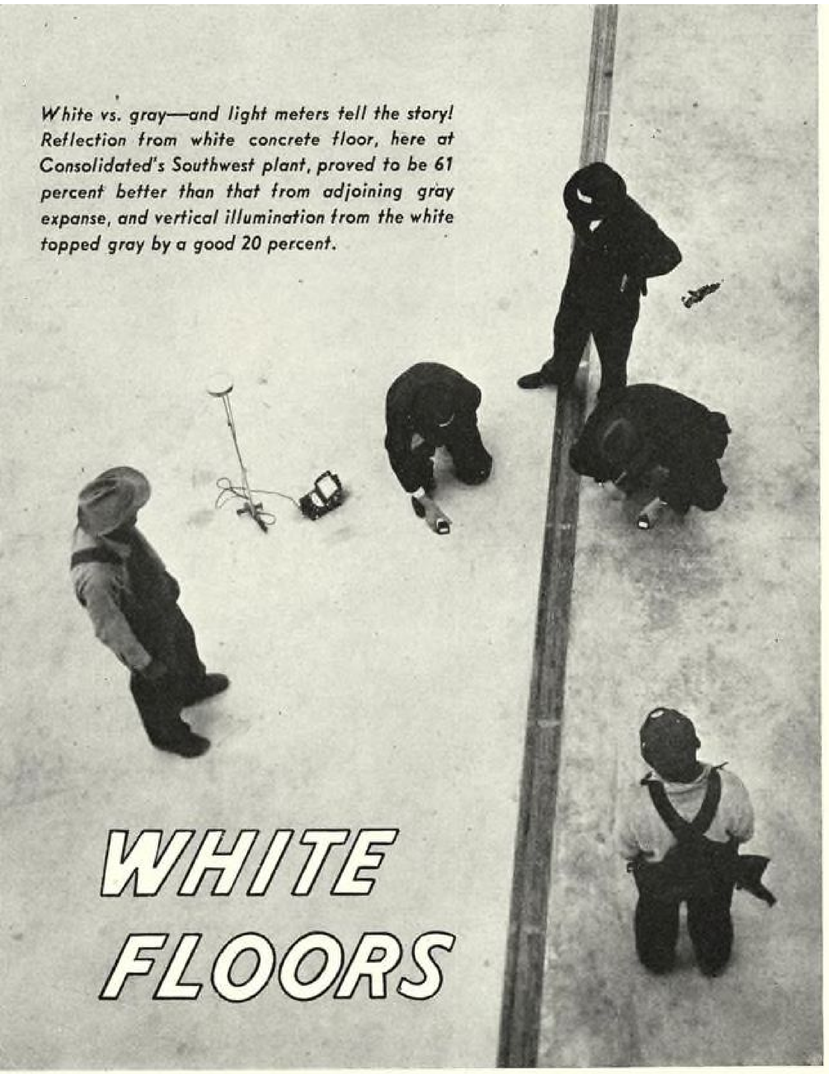

White vs. gray—and light meters tell the story! Reflection from white concrete floor, here at Consolidated's Southwest plant, proved to be 61 percent better than that from adjoining gray expanse, and vertical illumination from the white topped gray by a good 20 percent.

WHITE FLOORS

LIGHT Those Under-Wing Shadows

By sending 61 percent more light beneath wings, 20 percent more on vertical faces, easily maintained white flooring makes seeing easier, quicker . . . reduces accidents, errors . . . "ups" quality and production. What's more, Consolidated sights a $30,000 first-year saving in lamp fixtures, maintenance, and power.

By F. L. MABIE, *Manager, Atlas White Bureau, Universal Atlas Cement Company*

PROBLEM: To find an efficient way to bring an adequate amount of light to the undersides of wings and fuselages which hide much of the light from above, thus dimming under-wing and vertical working planes. Solution: Light-reflecting floors made with *white* cement.

Fact is that though walls and ceilings have long been recognized as giant reflectors and diffusers of light, it is only in recent years that the use of floors for this purpose has been given its due—and decidedly deserved—consideration.

It was construction of military aircraft which brought attention to the previously overlooked reflection values of floorings. Boeing, Consolidated, Douglas, and North American initially installed light-reflecting white cement floors in assembly plants in 1941—to find them so satisfactory that they are now installing "more of the same" in new plants being completed.

"But," ask most people, "aren't white floors difficult to maintain?" Frankly, experience shows they are not. According to foremen, white floor maintenance—frequent sweeping, occasional damp mopping, and periodic scrubbing—is neither more difficult nor more costly. Says the maintenance engineer at Consolidated's Southwestern plant: "It's just as easy to keep our white cement floor clean as our gray cement floor. Further, white promotes cleanliness."

Standard routine calls for sweeping daily, damp mopping once a month, and scrubbing with a rotary brush machine every two or three months.

Having adjoining floors of gray cement and of white cement, separated only by an expansion joint and with identical lighting facilities over the areas, the Consolidated plant in question, designed and built by the Austin Company, provided a pertinent basis for study and comparison of the floorings.

An extensive illumination survey (described in *Electrical World*, July 25, 1942) was made by the General Electric Co. over these adjoining floors, and in addition the plant engineer made comparative studies when the floors were new and after they had been in use six months. And it was shown:

1. That the white cement floor reflected 61 percent more light than the gray—throws 61 percent more light on the undersides of wings and fuselages,
2. That this higher reflection factor increases vertical foot-candles 20 percent,
3. That when lamps needed renewal and floors and lighting fixtures were as dirty as they were expected to get, the white floor retained more of its reflecting value than the gray.

To obtain the same high vertical foot-candles over the gray cement as was effected with the white would, it was calculated have increased cost for lamp fixtures, lamp maintenance, and electricity by 20 percent, or more than $70,000. And that $70,000 figure is more than $30,000 above the extra cost of the white floor.

What's more, there is an additional potential saving of some $23,000 in air conditioning expenses, for extra light fixtures would mean extra heat, requiring an additional air conditioning expenditure.

Worth of the better illumination contributed by white cement floors is far reaching. By making seeing easier and quicker, both quality and quantity of production are increased, while accidents are reduced, as well as errors and spoilage, and there is thus an added safeguard against work stoppages.

Noting that concrete may be used to retop old floors, it may be pointed out that the white product, a true portland cement, offers the same dependability, strength, and uniformity as the standard gray, and the materials are readily available. Moreover, since floor surfacing must resist abrasion and withstand heavy traffic, white concrete is certainly to be championed over less permanent white materials when the goal is attainment of maximum light reflection. For instead of being "skin deep," the low-maintenance white concrete offers "built-in" strength and longevity.

Wherever the illumination, production, and protection factors are important, the white floorings may be considered—not only in assembly plants and hangars but also in laboratories, offices, and numerous other buildings. In stair wells, corridors, and the like, too.

Fundamentally, while walls are effective reflectors only within close range and while ceilings are often ineffective reflectors because of girders, overhead equipment, etc., these floors which we have too long neglected as illuminators provide large uninterrupted areas to reflect and diffuse light where it is so much needed—close to the working plane. Such underside and vertical-face reflection is particularly important in aircraft tasks where considerable work is underneath wings and fuselages and on vertical surfaces.

Dark areas or shadows are either decreased or eliminated, and meanwhile a light background is offered against which numerous machine parts may be delineated. By their very expanse, light-reflecting floors distribute light throughout the broad working area, thus making seeing easier and quicker.

White floors provide a background with a degree of brightness more comparable to the materials worked on in the industry, thus they promote ease of seeing by reducing contrast between the seeing task and the surrounding background. Psychologically, the white floor enlivens the employee's attitude and quickens his step, while promoting cleanliness, orderliness, safety, health, and morale. Consolidated employees *prefer* to work on the white flooring.

Possibilities in potential betterment via white floors may be sighted in the September, 1942, estimate that an additional 40,000,000 sq.ft. of floor area will

(*Turn to page* 301)

RIGHT: That white floor "quickens the step, enlivens the attitude" is affirmed by single glance down well-illumined rows of "Liberators" in Consolidated assembly plant. Workers prefer to "work on the white." Camera study indicates clear easy-on-the-eye visibility throughout working area. There is no glare.

BELOW AT RIGHT: Further proof of effective reflection and diffusion of light via white floors is offered in this night view at Austin-built Midwest Boeing plant. There are no deep shadows, no sharp contrasts. White girders, ceilings aid light distribution.

BELOW: How high-reflecting white floor strikingly improves underside illumination of wings and fuselages is evident in this North American Aviation Midwest plant photo. Note perfect clarity (left) of B-25's insignia. J. Gordon Turnbull was architect and engineer of plant, while MacDonald-Tarlton-Patti was contractor.

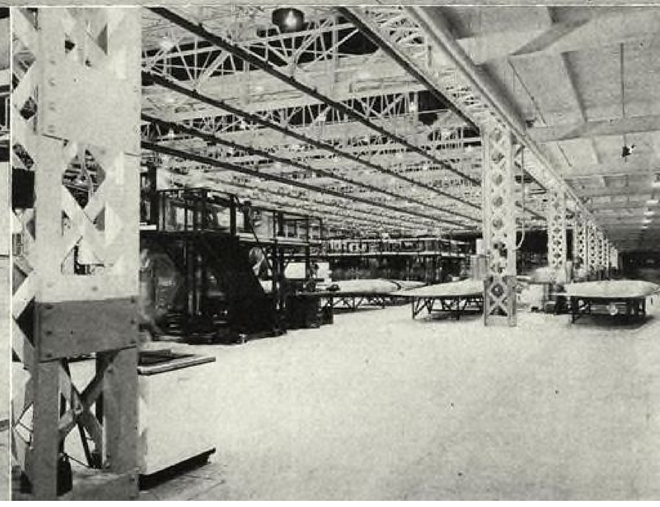

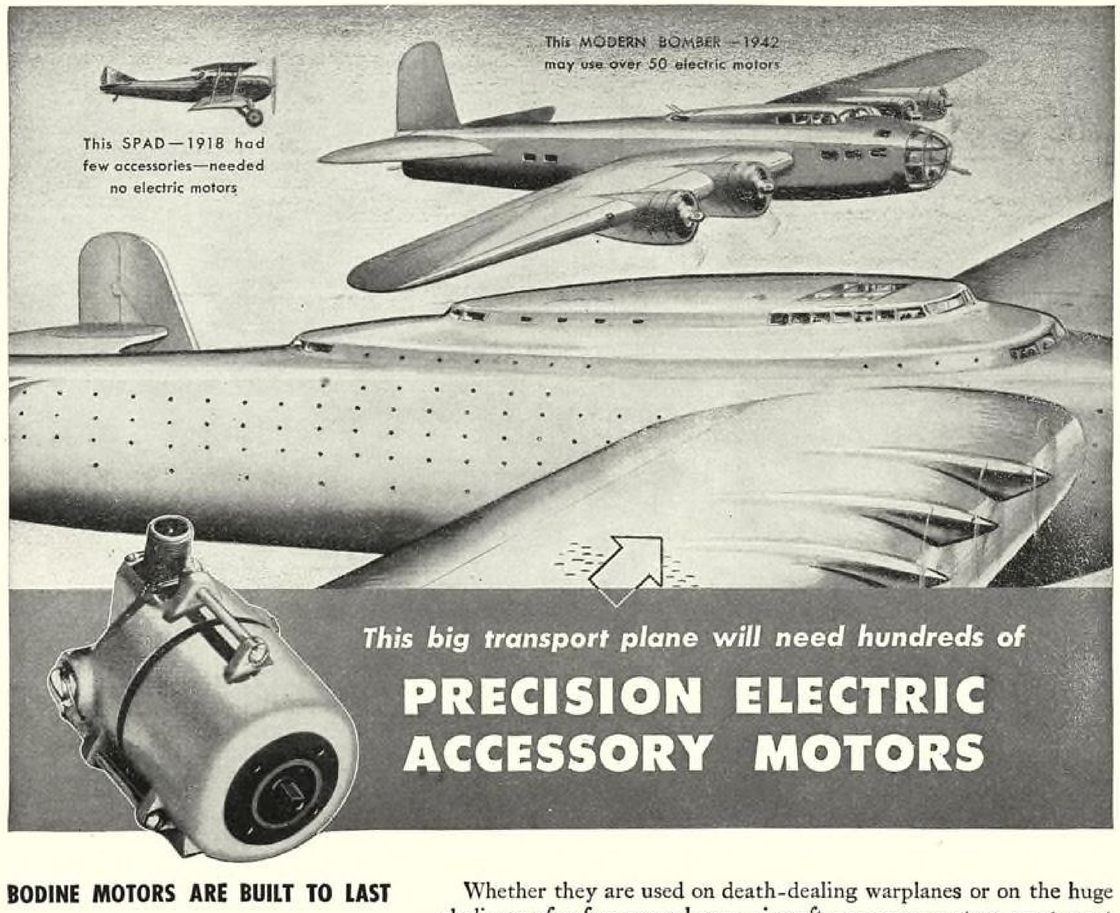

This big transport plane will need hundreds of

PRECISION ELECTRIC ACCESSORY MOTORS

BODINE MOTORS ARE BUILT TO LAST



RESIST VIBRATION



ENDURE TEMPERATURE CHANGES



LIGHT IN WEIGHT

MEET AIR CORPS SPECIFICATIONS

Whether they are used on death-dealing warplanes or on the huge skyliners of a few years hence, aircraft accessory motors must meet the same requirements. They must be carefully designed to make them extremely light in weight. They must be thoroughly dependable, whether they are used continuously or intermittently. They must be safe for operation near gasoline fumes. They must withstand high temperatures. Continuous vibration must not affect them.

Bodine electric aircraft motors easily meet these requirements. High standards of precision are constantly maintained by accurate machining from tested high quality materials, and by constant testing and inspection of all parts during manufacture. While Bodine's present production is entirely devoted to making motors for the war effort, their 35 years of engineering experience are available to you in developing your designs for post-war use. Bodine Electric Company, 2274 W. Ohio St., Chicago, Ill.



BODINE

FRACTIONAL HORSEPOWER MOTORS

Synthetic Coatings Protect Engine Parts

New use of Resistoflex PVA solution at Packard puts resilient covering on wire baskets to maintain undamaged surfaces in degreasing and transportation.

TRUE MAINTENANCE BEGINS IN the factory, even before parts have been assembled to make the completed unit, whether it be an engine, propeller, airframe or accessory. Such care is particularly necessary in aircraft engine plants where highly polished parts can easily be damaged by improper handling.

Proper handling today is being enhanced by ingenious use of the newer resins, some of which have been found to be superior to strategic materials which they replace. In the manufacture of Rolls-Royce *Merlin XX* aircraft engines, for example, Packard engineers have used such a synthetic as covering for metal baskets, trays and racks used in parts handling.

The baskets, varying in size and type, are ordinary steel rod, with metal inserts. In the adaptation for engine parts-handling, the containers are first degreased and dipped twice in a Resistoflex PVA solution especially formulated for coating metal, then run through a low temperature oven to speedy drying. The resulting coat has certain characteristics of rubber—flexibility, elasticity and resilieney—but is not affected by gasoline, oils and most organic solvents including chlorinated hydrocarbons. It requires no vulcanization and contains no sulphur which might tarnish highly polished metals, an important factor in uses such as that at Packard.

The material which Packard has put to this new use on a large scale consists mainly of a modified polyvinyl alcohol compound which, until processed, is neither thermoplastic nor thermosetting. With proper handling it can be molded to any shape or extruded into hose or other finished products using processes which are similar to those of the rubber and plastics industries.

FIG. 1. Preparing a wire parts-handling basket at the Packard plant producing Rolls-Royce "Merlin" engines. The baskets are purchased uncoated and dipped twice in Resistoflex, a modified polyvinyl alcohol resin solution and then run through a drying oven. The resulting coating is a tough abrasion and solvent resisting film which is, however, resilient so that it will not harm highly polished engine parts. FIG. 2. Almost any type or size of basket or tray can be coated with the synthetic. In the background at the left is a rack with spindle-type holders and at the right a rack type for larger engine parts, while the carriers in the foreground have different types of basket inserts. The trays can be used both for holding parts during degreasing and for transportation. The synthetic resin—the same material used for aircraft fuel and hydraulic lines—is unaffected by the solvents used in degreasing. FIG. 3. The Resistoflex coated containers can also be used for storage. An added advantage lies in the fact that the parts can be easily identified, even on the bottom of the stack.

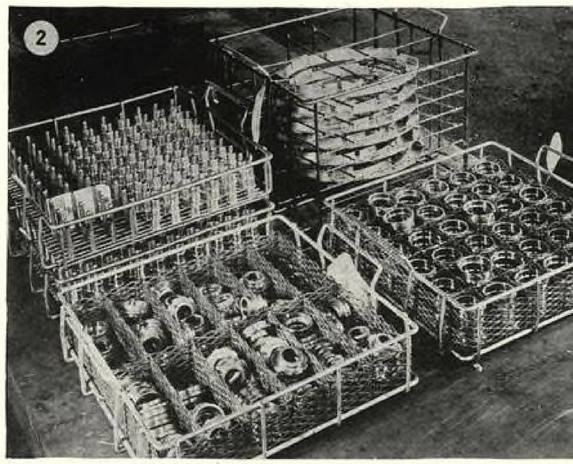

BUY WAR BONDS

High Performance TRAINERS..

Call for High Performance PUMPS!

ROMEC fuel pumps are used to the exclusion of other types on the Cessna "Crane" twin-engine low-wing monoplane used for advanced training.



The pumps illustrated are but a few in the extensive line of ROMEC aircraft pumps for fuel, air, oil, and ethylene glycol. Pumps famous for their fine flight performance.

We pledge our unlimited cooperation in this all-out emergency to help you attain the correct answer to every pump problem. Simply write us full details.

As the crew cannot perform better than their hearts, so the planes and motors cannot perform better than their pumps.



Romec PUMP COMPANY
ELYRIA, OHIO, U. S. A.

Manufacturers of ENGINE-DRIVEN PUMPS, ELECTRIC MOTOR-DRIVEN PUMPS, and HAND-OPERATED FUEL PUMPS

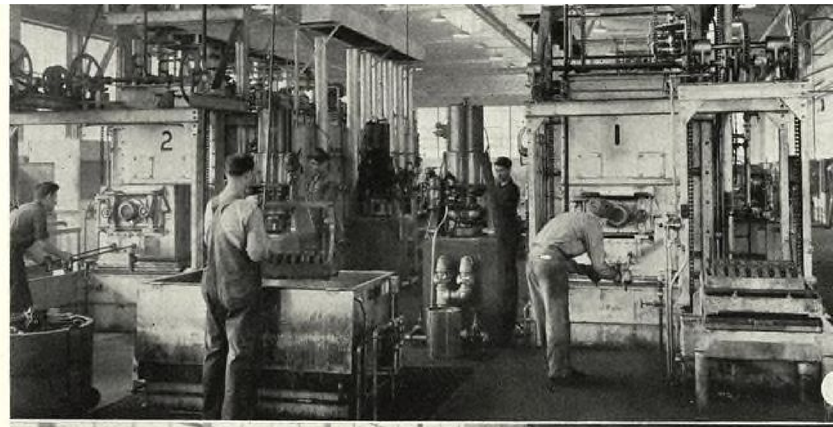

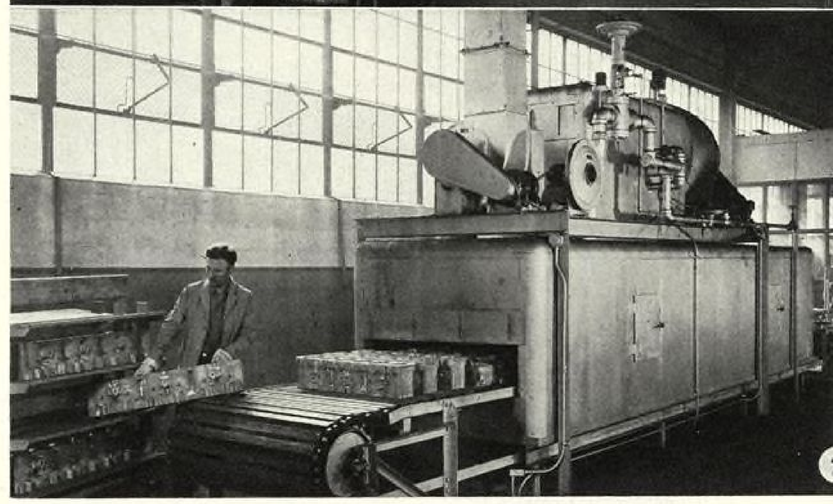

FIG. 1. Discharge end of the Holcroft hardening furnaces. The seven vertical vent pipes ending below the exhaust hood connect with the radiant tubes in which combustion takes place. Also shown are the three presses for dies in which large parts are clamped before quenching. Tank in foreground is for degreasing parts upon removal from quench. . . . FIG. 2. Ross furnace in which aluminum cylinder heads and blocks are given two-hour stress relief treatment as they are carried through on a slowly moving conveyor. Special wheeled rack for block and heads is shown at left.

Heat-Treating Aircraft Engine Parts

Application of production line technique to custom jobs illustrated at Packard plant producing Rolls-Royce engines.

WHILE HEAT-TREATING is often much of a "custom job," large scale manufacture of Rolls-Royce aircraft engines for both British and American planes has brought the production line technique to this department of Packard Motor Car Company's plant. Volume of heat-treat work is such that the department occupies a separate building, adjacent to that in which the heat-treated parts are machined.

The unit is equipped to do carburizing, hardening, drawing, nitriding, cleaning and inspection of steel parts, as well as to perform stress relief on some aluminum and steel parts. All work is done on the ground-level floor, although some of the equipment rests on foundations located in the basement, which also contains cooling tanks and piping.

Parts to be heat-treated are received on trucks, some of which are designed to carry racks for particular parts. Although most of the parts are already partly machined, great care is exercised to avoid marring or scratching which might lead to rejections or even to service failures. Most parts undergo grinding or other machine work after heat-treatment but are, nevertheless, handled much as if they were in finished form and ready for assembly.

Most of the parts are first delivered to the carburizing and hardening end of the heat-treat department, where there is a degreasing tank where all parts to be heat-treated are removed. Many parts, chiefly forgings made from AMS 6250 and 6290 steels (equivalent to SAE 3312 and 4615 respectively), require carburizing which is done in ten Leeds and Northrup furnaces arranged in two rows of five each. Parts to be carburized are placed in wire trays and baskets for loading into automatically controlled furnaces by means of a one-ton bridge crane equipped with floor controls.

Carburizing is done at 1,700 deg. F. for one to eight hours, depending on the thickness of case required. About 0.060 in. of effective case is produced in eight hours. Carbon, supplied by natural gas containing about 75 percent methane, is constantly circulated by a fan in the bottom of each furnace. Flow of the gas is regulated as required for the particular charge and amounts to from 5 to 20 cu. ft. per hr. Subsequent to this carburizing parts are, in many cases, transferred to an adjacent brick-lined chamber where they remain in a natural gas atmosphere at a temperature of 700 deg. F. for two to six hours. Parts which are not to be hardened all over, and which are returned to the machining department for removal of the case where it is not wanted, are allowed to cool slowly to 1,200-1,500 deg. F., and the baskets are set on the floor for cooling to room temperature. Parts carburized range from ½-in. plugs up to gears of 13-in. diameter.

Most of the parts to be hardened, whether previously carburized or not, are put through one of two Holcroft continuous furnaces, which are heated by interior radiant tubes using gas fuel, hence the products of combustion do not come into contact with the parts undergoing heat-treatment. The furnaces are divided into five zones, each equipped with its own temperature controlling device. The atmosphere of both furnaces

"dag"

COLLOIDAL GRAPHITE

IS IMPORTANT In the Manufacture Or Use of These Products

HERE ARE THE RULES

Acheson Colloids Corporation will give a $25.00 War Bond to each of the 5 people who submit complete and accurate answers together with the 5 best letters on the question, "Why is **'dag'** colloidal graphite important in the manufacture and/or use of the twelve products pictured here?" (1) State business connections (no one in the graphite field or their families will be eligible). (2) All entries must be legible. (3) All entries must state the publication in which the advertisement was seen. (4) Entries must be postmarked not later than January 15, 1943. (5) In case of ties, duplicate awards will be made. (6) Entries become the property of the Acheson Colloids Corp. (7) The verdict of the judges will be final.

"dag" COLLOIDAL GRAPHITE AS A PARTING COMPOUND

Its lubricating value, its heat and corrosion resistance, and its lack of affinity for other chemical elements, make **"dag"** colloidal graphite an ideal parting compound, that is, a substance to prevent one part sticking to another due to the action of heat, corrosion, or chemical action.

"dag" colloidal graphite is especially useful in keeping molten glass from sticking to molds; in keeping electric lamps from sticking in their sockets; to facilitate the removal of adhesive from the rolls used in making corrugated paper; also as a parting compound in metal and rubber molding. **"dag"** colloidal graphite keeps bolts, studs, and pipe threads in a condition to be unscrewed easily when necessary. It also makes it possible to tighten bolts and pipe connections to a greater extent than is possible without the colloidal graphite treatment.

Difference Between Colloidal and Powdered Graphite

"dag" colloidal graphite dispersions should never be confused with dispersions of powdered graphite which have not the same properties. **"dag"** colloidal graphite particles are many times smaller than the particles of powdered graphite —so small they readily pass through the smallest pores of filter paper. In fact, they go wherever their liquid carrier penetrates. The carefully controlled Acheson process of colloidalization imparts to these particles a property powdered graphite does not have. This is "Brownian Movement" which enables colloidal graphite to remain in suspension indefinitely.

"dag" is a registered trade-mark of the Acheson Colloids Corporation.

Write for NEW BULLETIN 422H on the use of "dag" Colloidal Graphite as a Parting Compound

dag COLLOIDAL PRODUCTS

dag COLLOIDAL PRODUCTS

ACHESON COLLOIDS CORPORATION, Port Huron, Mich.

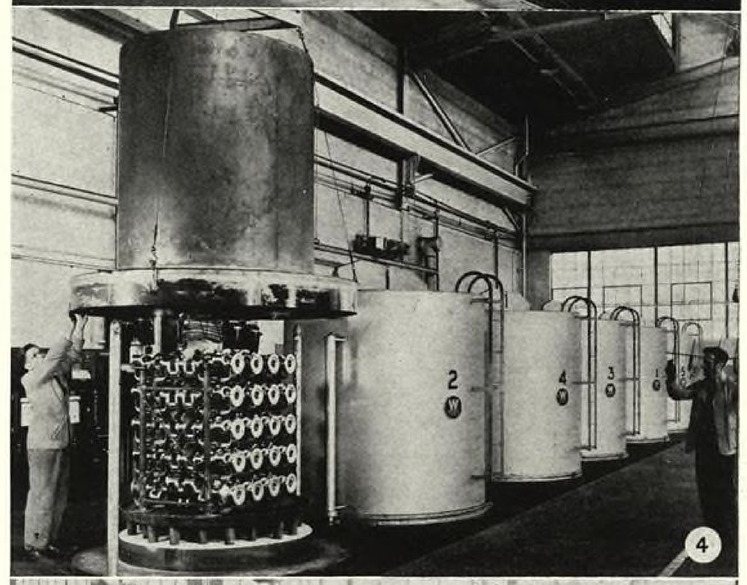

FIG. 3. Some of the Lindberg drawing furnaces, one of which is being charged by use of overhead crane with floor controls. Automatic control panels are visible in background, against the wall. At extreme left is Wheelabrator for blasting parts after heat treatment, and to the right of the furnaces is a quench tank. . . . FIG. 4. Battery of Westinghouse nitriding furnaces showing, at left, a rack filled with crankshafts ready for treatment. One of the two bells for enclosing the charge is being lowered into place. . . . FIG. 5. Two of the small Lindberg tilting hearth furnaces used for certain small parts. At right is quench tank equipped with fixtures which move and rotate parts through the quench while holding them against warpage. . . . FIG. 6. Group of machines on which forgings are given hardness tests after heat-treatment. Grinder at left is employed to remove a portion of the case on parts which have been carburized as one step in determining thickness of the case applied. Note baskets and sturdy wheeled dollies for transporting parts from one section of heat-treat department to another.

is automatically controlled and contains a mixture of carbon-monoxide, carbon-dioxide, and water vapor fed from the generator containing charcoal. The CO_2 content is maintained at about 2 percent since, if the percentage is too high, there is a tendency to reduce hardness of the parts treated and, if too low, some carburizing of the machine surfaces takes place.

The hardening furnaces are equipped with rails on which trays containing the parts to be heat-treated are advanced to the furnace in 16 pushes. At each push, the charging door opens automatically to receive the next tray and that at the opposite end is discharged on to a Lowerator which drops it into quenching oil, the temperature of which is held at about 110 deg. F. The rate of passing through the furnace is adjusted to correspond with the part being put through and is so set that parts which have been carburized obtain a temperature of about 1,475 deg. F. Batches which have not been carburized are heated to 1,500 to 1,525 deg. F. Large parts which might warp during quenching are removed with tongs from a side door near the end of the furnace and placed in a die-press, arranged for air clamping. Three such presses are provided to serve both furnaces.

In addition to the continuous hardening furnaces there are two Lindberg tilting hearth furnaces for special jobs on small parts requiring 1,850 deg. F. These furnaces are used for parts such as valve seats which require special heat-treatment and rods which require special handling in a quenching fixture to avoid warpage. In one such case, rods

(*Turn to page* 327)

Wittek *AVIATION* Hose Clamps

For Dependable Hose Connections

Streaking through the skies, squadrons of swift fighter planes are in the fight and doing our nation proud—establishing brilliant records as a daily routine of our Army Pilots. Wittek Aviation Hose Clamps are helping to keep many of them flying with dependable hose connections.

Since the early days of modern aviation Wittek has served the industry and today this reputation is serving the Nation well. Wittek Aviation Hose Clamps are made of quality materials and by experienced craftsmen. They are used by the outstanding builders of military aircraft and meet existing Army and Navy specifications. Wittek Manufacturing Co., 4305-15 West 24th Place, Chicago.

WITTEK *Aviation* **HOSE CLAMPS**

REVIEW OF PATENTS

By A. HARRY CROWELL, *Patent Lawyer*

THE FOLLOWING are digests of the more significant recent patents on aviation developments announced by the U. S. Patent Office. Mr. Crowell will be glad to furnish AVIATION readers with preliminary information without charge respecting their patent and trademark matters. Address inquiries to AVIATION, 330 W. 42nd St., New York, N. Y. Complete printed copies of any of the patents listed are obtainable at a cost of 10¢ each directly from the U. S. Patent Office at Washington.

Air Rotor, 2,297,815, G. W. Tidd, assignor to Autogiro Company of America. The invention relates to the balancing of rotors of unsymmetrical form having dissymmetry of rotational drag. It is especially applicable to the balancing of counterweighted single-blade rotors of the propulsive airscrew type commonly used on aircraft.

Radio Landing Control System, 2,297,822, G. H. Wintermute and G. L. Davis, assignors to Washington Institute of Technology, Inc. A plurality of fixed stations are disposed about a landing area. Mobile transmitting means are used in the establishment of the radiated fields of the landing system. The relation of the mobile means and the fixed stations is such that the transmitting means may be properly positioned with respect to any desired or necessary direction of landing.

Rate of Climb Indicator, 2,297,873, S. Cerstvik, assignor to Bendix Aviation Corporation. A pressure vane type of instrument, wherein a differential between the pressures outside and inside of the instrument, established by a change of one of the pressures is utilized to indicate the rate of climb or descent, particularly adapted for use in small aircraft.

Aircraft Control, 2,298,523, S. H. Webster, assignor to Bendix Aviation Corporation. An appliance to start the wheels rotating prior to landing, so that their speed is nearly proportional to the landing speed of the plane. The device also provides for gradual deceleration of the wheels, after first contact with the ground. The object is to save wear on the tires.

Transmission, 2,298,645, H. D. Jackes, Jr., assignor to Wright Aeronautical Corporation. A clutching system by which the drive ratio in a gear train may be altered while the gear train is under load, particularly for two-speed supercharger drives as used on aircraft engines.

Lubrication System, 2,298,646, W. G. Ovens, assignor to Wright Aeronautical Corporation. A pressure control system in a force feed lubricating system by which determinate pressure may be maintained at that end of the system most remote from the pump while disposing the relief valve itself close to the pump.

Tension Compensating Device, 2,298,611, H. H. Bruderlin, assignor to Douglas Aircraft Company, Inc. The device is for compensating cable tension, especially for

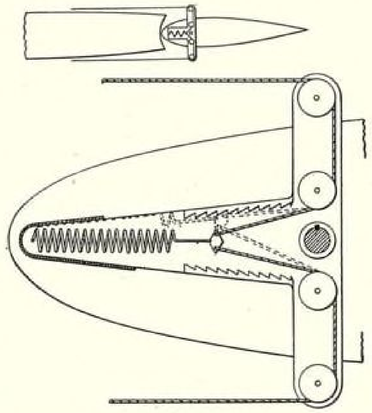

steering control systems of aircraft. The device functions only while the tension in the cables is equalized or is of the same order of magnitude, and which is automatically overcome, or locked out, on operation of the control system.

Broaching Machine, 2,298,647, P. F. Rossman, assignor to Curtiss-Wright Corporation. A machine tool of the generating broach type, particularly a propeller blade generating machine which utilizes the principles of broaching and which is capable of finish cutting a propeller blade to final form quickly and accurately.

Combination Landing Gear and Aircraft Gun Recoil Mechanism, 2,299,227, C. C. Goetz. The guns subject to sliding along or movement about carriages on recoil are engaged with the landing gear as a recoil mechanism, the standard recoil devices of the gun carriages being thereby eliminated.

Shock Absorbing Strut for Airplanes, 2,299,613, E. W. Cleveland and E. R. Warner, assignors to the Cleveland Pneumatic Tool Company. A nose or tail wheel support including an oleo shock strut enabling free castoring action during ground contact and having automatic correct landing position obtaining means when off the ground.

Valve Assembly, 2,299,615, G. T. Downey, assignor to Aero Supply Manufacturing Co., Inc. An improved rockable valve structure and improved sealing means so that a valve of this type may be used for regulating the flow of gasoline to an engine. The valve structure may be readily removed without complete disassembly of the valve assembly.

Propeller Control Mechanism, 2,299,635, C. I. MacNeil and R. T. Zwack, assignors to Bendix Aviation Corporation. An improvement on the Caldwell patent 1,893,612 type, adding to the Caldwell system the concept of automatic governor adjustment. A propeller pitch control mechanism involving a hydraulic unit and control valve.

URGE STANDARDS ADOPTION

Typical posters being distributed to members by National Aircraft Standards Committee in its industry-wide drive for adoption of uniform standards. It is the committee's hope that displaying such posters on bulletin boards will not only promote standardization among aircraft manufacturers, but will encourage individuals in various plants to submit similar sketches for distribution throughout the industry. *(See article page 165.)*

SKETCH BOOK of Design Detail

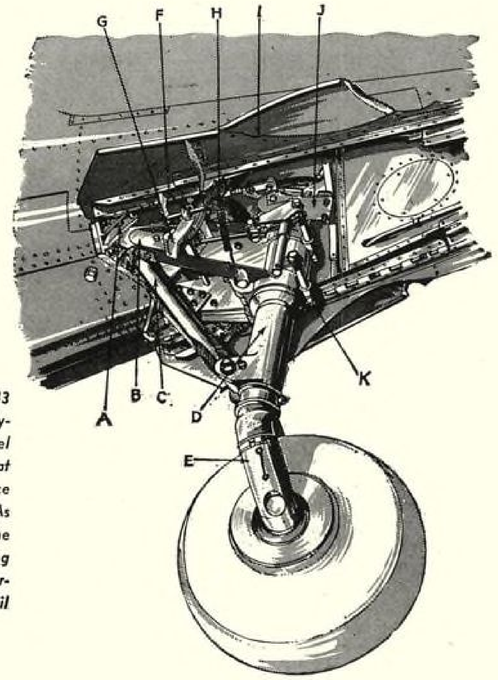

The retractable tail wheel of the Republic P-43 "Lancer" is shown at right. Operated by a hydraulic motor forward and above the unit, the wheel swings back and up into the fuselage, pivoting at "A." "B" is the yoke of the gear, "C" is the brace tube, "D" is the shock strut and "E" is the fork. As the wheel retracts, the roller "F" drops over the angle "G" and the spring "H" pulls the fairing "I" into place below the wheel. "J" is the steering rod connection for the wheel and "K" is tail wheel swivel lock pin actuating mechanism.

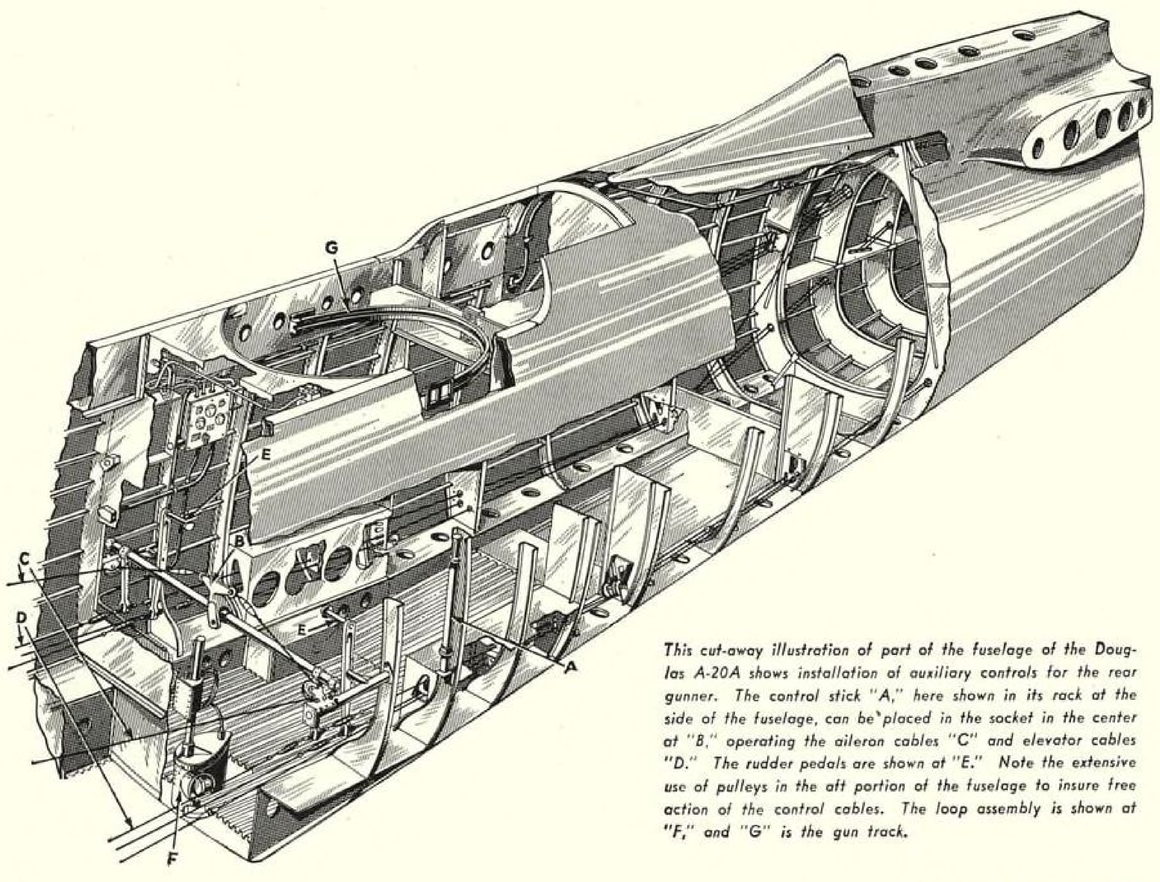

This cut-away illustration of part of the fuselage of the Douglas A-20A shows installation of auxiliary controls for the rear gunner. The control stick "A," here shown in its rack at the side of the fuselage, can be placed in the socket in the center at "B," operating the aileron cables "C" and elevator cables "D." The rudder pedals are shown at "E." Note the extensive use of pulleys in the aft portion of the fuselage to insure free action of the control cables. The loop assembly is shown at "F," and "G" is the gun track.

Making the Enemy DIE

FOR HIS COUNTRY

VICKERS

HYDROMOTIVE CONTROLS

Soldiers of the U. S. Army are now given this maxim: "It is commonly supposed that the primary duty of a soldier is to die for his country. This is not true. It is his duty to make the enemy die for his."

The spirit of aggressiveness which this reveals should be heartening to every American, and all Americans will want to do everything they can to make the enemy "die for his country" in this war of survival.

Vickers Incorporated is contributing to this effort on many fronts. Vickers Hydromotive Controls on our war planes have helped compel many an enemy into this sort of heroism. These high pressure oil hydraulic controls are dependable, accurate, easy to operate, easily adjusted, insensitive to vibration and shock . . . reliable no matter how tough the going.

VICKERS *Incorporated*

1462 OAKMAN BLVD., DETROIT, MICHIGAN

Engineers and Builders of Oil Hydraulic Equipment Since 1921

AEROQUIP SELF-SEALING COUPLINGS

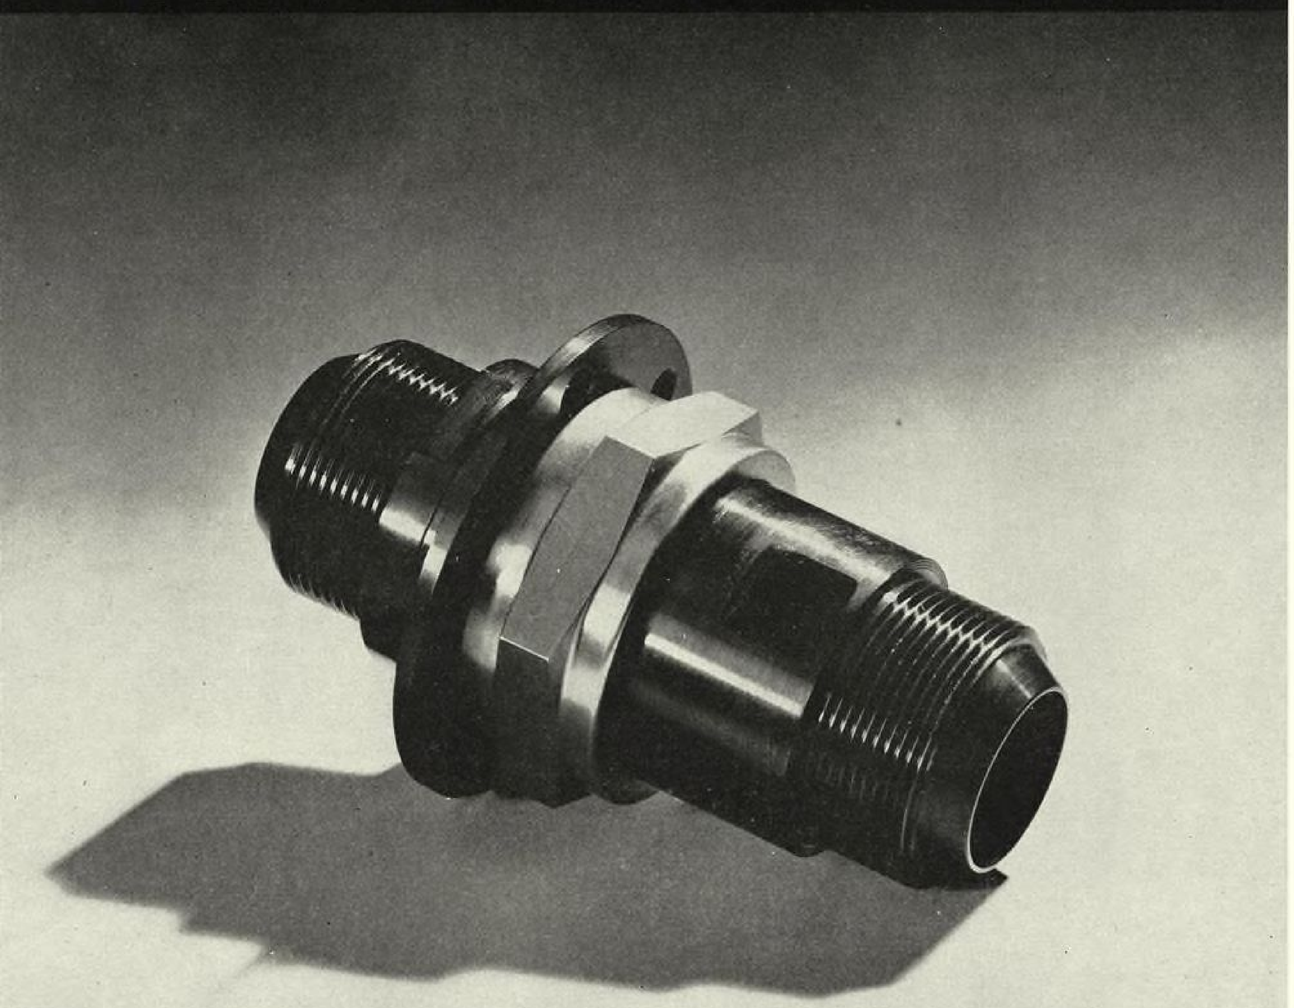

AEROQUIP SELF-SEALING COUPLINGS ALLOW DISCONNECTION OF LIQUID CARRYING LINES WITHOUT LOSS OF FLUID OR TRAPPING OF AIR UPON RECONNECTION. . . . .

WEST COAST OFFICE:
1709 WEST EIGHTH ST.
LOS ANGELES, CALIF.

EASTERN REPRESENTATIVE:
J. HENRY REISNER
HAGERSTOWN, MD.

AEROQUIP CORPORATION
JACKSON, MICHIGAN, U. S. A.

AEROQUIP HOSE LINES

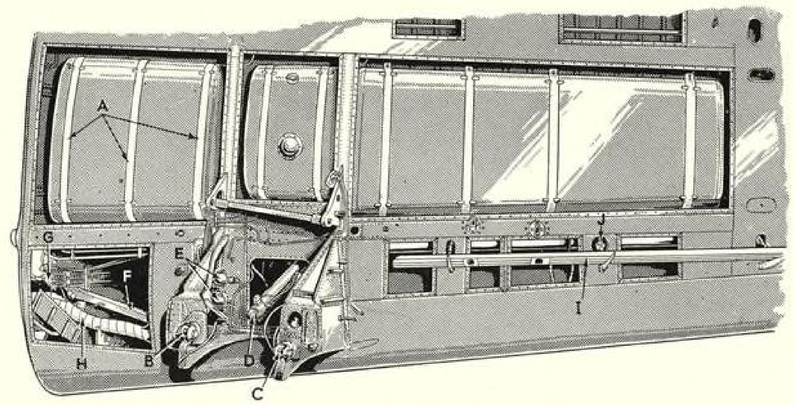

Wing tanks of the Junkers JU-88 are located outboard of the center section, there being three to a side with capacity of 195 gal. per wing. The tanks are held in place by canvas straps "A." Metal cover plates (removed for the drawing) are screwed onto the lower surface of the wing. The landing gear hinge points are at "B" and "C," and "D" is the retracting strut. Fuel pumps are housed inside the nacelle at "E." The conduit "F," an aluminum case with removable cover, contains all electric wiring for the wing. Hydraulic and fuel lines enter the wing at "G." The leading edge of the wing is heated for de-icing; the asbestos-covered conduit "H" taking part of the heated air to the cabin. The venetian blind diving brake "I," shown in extended position, is operated hydraulically by the unit "J."

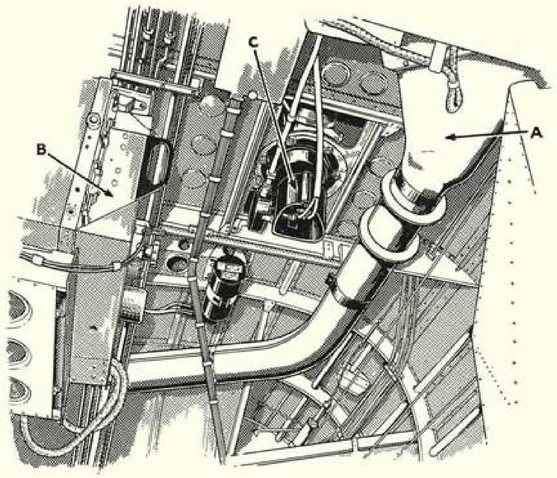

Looking aft inside the fuselage, the fuel jettisoning pipe "A" is supported from the roof, crossing to the opposite side behind the radio "B." The directional loop is in the center at "C."

As shown in the diagrammatic drawing below, the Junkers JU-88A-1 has a unique jettisoning system for the 300 gal. fuselage tank, an auxiliary placed in the bomb bay for long-range operations. When this tank is used the plane carries two 550 lb. bombs in external racks. Jettisoning utilizes compressed air from the supercharger blower. The intake from both blowers is at "A," the air passing through a solenoid valve "B." The pipe "C" is a vent to the atmosphere, while the pipe "D" leads to the fuel tank "E." To jettison the fuel, the pilot closes the solenoid valve, sending the air into the tank, forcing the fuel out through the pipe "F" which leads out through the fuselage to the tail.

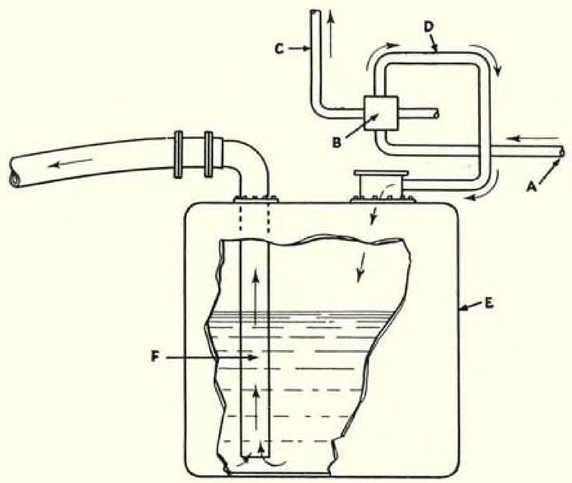

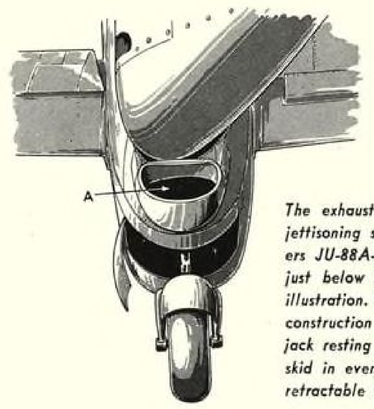

The exhaust vent for the fuel jettisoning system of the Junkers JU-88A-1 is shown at "A" just below the rudder in this illustration. The pipe is of heavy construction and serves as a jack resting point or as a tail skid in event of failure of the retractable tail wheel.

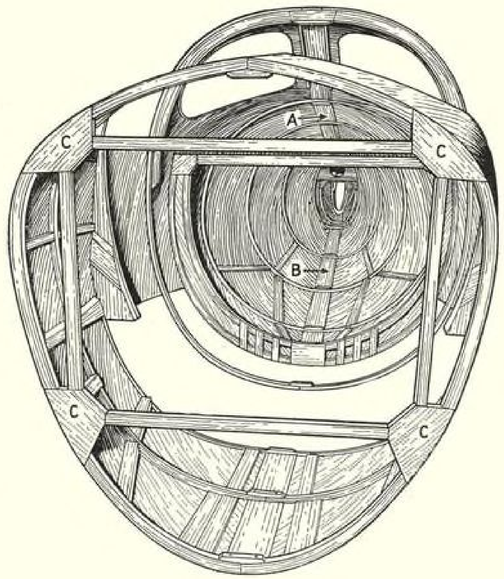

Simplicity of the Engineering Research Corporation's "Ercoupe" fuselage design is shown in the sketch at left. The seam lines "A" and "B" join the two integrally molded halves. The gusset plates "C" complete the simple joint for both fire wall and engine mount structural members. The halves of the fuselage are molded as one unit from the fire wall back to the tail section.

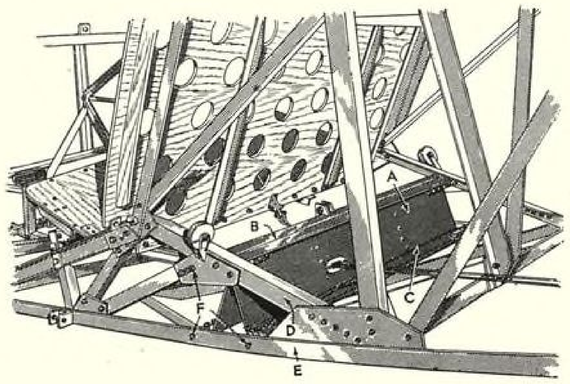

The landing gear truss attachment of the General Aircraft "Skyfarer" is shown at right. The truss is at "A" and is built up of two inclined flat plates making the sides and joined at the top between two aluminum alloy angle sections "B." Each plate is reinforced at the bottom by angle sections "C" riveted along the edge. The fuselage angle section frame members "D" and "E" afford support at the end of the truss. The landing gear strut is attached by bolts at three points "F."

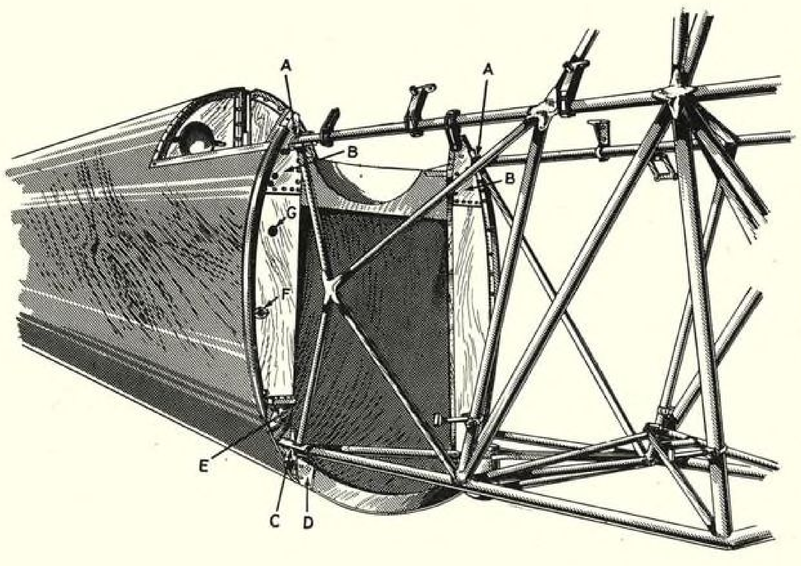

The method of attaching the plywood aft-section of the fuselage to the welded tubular mid-section of the North American trainer is shown at left. Two bolts at points "A" on each side of the fuselage make the connection at the top. Metal plates "B" pick up the shear load in the web and take it out through the upper fitting. At the lower connection "C" the tube flattens out and two bolts are used, running vertically through the tube. "D" is a metal plate serving the same load-carrying function as the plate "B" at top connection. "E" is a pulley bracket and holes "F" and "G" are holes for control cables. (Also see AVIATION's Sketch Book for August and September, 1942.)

THE LOUIS ALLIS CO., MILWAUKEE, WIS.

THE LOUIS ALLIS CO., MILWAUKEE, WIS.

Machining Aluminum

Cuts, Speeds, and Feeds When Machining Aluminum Alloys

(See Note)	Rough Machining			Finish Machining		
	Max. Cut Inches	Speed (fpm)	Feed, Inches	Cut, Inches	Speed (fpm)	Feed, Inches
LATHE TURNING						
Type I castings, not heat-treated	0.25 (a)	500 to 900	0.020 to 0.030	0.002 to 0.010	Maximum	0.002 to 0.010
All others	0.19 (a)	400 to 800	0.007 to 0.020	0.002 to 0.010	600 to 900	0.002 to 0.010
MILLING						
Type I castings, not heat-treated	0.25	400 to 600 (b) 500 to 700 (c) Maximum (d)	5 to 15 (e)	0.010 to 0.020	500 to 700 (b) 500 to 700 (c) Maximum (d)	10 to 25 (e)
Type I castings, heat-treated Type II castings Types I and II wrought alloys, heat-treated	0.25	400 to 600 (b) 500 to 700 (c) Maximum (d)	4 to 10 (e)	0.010 to 0.020	500 to 700 (b) 500 to 700 (c) Maximum (d)	5 to 15 (e)
Type III alloys	0.25	300 to 500 (b)	3 to 8 (e)	0.010 to 0.020	500 to 700 (b)	4 to 10 (e)
BORING						
Light duty (1 to 2 inch)	0.09 (a)	Maximum (f)	0.010 to 0.020	0.010 to 0.020 (a)	Maximum (f)	0.001 to 0.005
Medium to heavy duty	0.25 (a)	600 to 1000	0.007 to 0.015	0.010 to 0.020 (a)	600 to 1000	0.001 to 0.003
SHAPING						
Heavy duty (36 inch)	0.25	Maximum (g)	0.010 to 0.030	0.005 to 0.010	Maximum (g)	0.100 to 0.150
PLANING	0.38	Maximum (h)	0.025 to 0.100	0.005 to 0.015	Maximum (h)	0.050 to 0.375

NOTE: See table below for explanation of Type numbers listed above in first column.

(a) Cut measured on radius.
(b) For carbon steel tools.
(c) For high-speed steel tools.
(d) For cemented carbide tools.
(e) Travel of work.
(f) Peripheral speed of tool is maximum of most machines.
(g) Travel of ram.
(h) Speed of table.

Types of Commercial Aluminum Alloys With Respect to Machinability

Type*	Alcoa Alloys			
	Casting Alloys		Wrought Alloys	
	Non Heat-Treated	Heat-Treated (a)	Non Heat-Treated	Heat-Treated (a)
Type I	173	220 (b)	11S	....
	C113	122	....	....
	645	....	....	....
	B113	....	....	....
Type II	112	D195	61S	56S
	216	142	53S	....
	A214	195	A51S	....
	109	B195	17S	....
	12	....	....	....
	214	....	....	....
	212	....	....	....
	B214	....	....	....
Type III	172	355	25S	4S
	A108	A355	70S	52S
	108	356	18S	3S
	356	A132 (c)	14S	....
	43	....	24S	....
	....	....	32S (c)	....

NOTES: *Type I alloys have best machining characteristics.
(a) Heat-treated as usually sold, namely a solution treatment followed by aging at room or elevated temperature.
(b) Alloy 220 is not aged.
(c) Alloy cuts freely, but wear on tools may be excessive unless they are tipped with cemented carbide.

(*Continued on page* 185)

Specify the HARVILL PLASTI-SEAT

and save METAL for places where metal can't be substituted

SIX FACTS TO CONSIDER

1. Made of non-strategic materials
2. Greater strength and durability
3. Conforms to Spec AN 7505
4. Cost less per unit
5. Equal or less weight than metal
6. Easily adapted to design changes with little tooling expense

Here's the answer to the industry's urgent need for a seat that not only conserves vital materials . . . but equals or surpasses all the requirements of Spec AN 7505. Sturdily constructed of special plywoods, fabrics and plastic . . . yet as light or lighter than seats in metals or other materials. Because of the simplicity of construction . . . the basic idea of this phenomenal seat may be easily adapted to special designs with little tooling expense.

INVESTIGATE AT ONCE

Complete information to qualified individuals

HARVILL Corp.

6251 West Century Blvd., Los Angeles, Calif.

Eastern Representative: HARVILL PROCESSES CORP. • Federal Trust Bldg. • Newark, N. J.

Machining Aluminum

General Characteristics of Tools for Aluminum

Although the machining properties of the various aluminum alloys differ, the principal differences between aluminum and most other metals with respect to the tools required are characterized as follows and should be carefully observed:

1. Grind more top and side rake on the cutting tools than is common for machining steel.
2. Keep cutting edges sharp and free of burred or wire edges.
3. Maintain smooth, bright tool surfaces free from scratches.

TOOL MATERIALS

Tools of plain high-carbon steels frequently perform satisfactorily when machining aluminum and most of its alloys. Under conditions in which the cutting speeds are necessarily low, they may be the most economical and this is particularly true for small diameter drills. For quantity production work, tools made from high-speed steels have largely replaced the carbon steel tools, but in many instances, tools tipped with cemented carbides have proved far superior to high-speed steel tools. Tools of this last type are especially suited for the machining of aluminum alloys of high silicon content; in fact some of these alloys cannot be machined successfully under production conditions without it. The cemented carbide tipped tools, when ground to proper rake angles, produce excellent machined surfaces and remain sharp for long periods of time without regrinding; consequently these tools are economical for high rate production. The use of cemented carbide tools is, of course, restricted to operations in which the work is free from vibration and irregularities in the cut.

TOOL SHAPES

In general, the larger rake angles are employed for finishing tools and for the aluminum alloys that are not free cutting; this includes the softer materials which require tools with exceptionally acute and keen cutting edges. On the other hand, rake angles in the lower range are used for roughing cuts and for machining the alloys that have free-cutting characteristics. Tools similar to those used for machining steel may often be employed successfully.

Top rake generally varies from 20 to 50 deg. Very finely finished surfaces may be produced with tools having a top rake angle in the higher end of the range, but, obviously, such a tool can be used only in a machine that is sturdy, free from vibration, and which has no lost motion in the feeding mechanism. For some operations it may be necessary to use a top rake smaller than indicated by the above range, but a negative rake should never be used.

Side rake is important in machining aluminum and its alloys as this produces a slicing action which is especially effective in parting the cutting from the stock. A side rake of from 10 to 20 deg. assists materially in the cutting action of the tool. Planer and shaper tools may have a considerable amount of side rake; finishing tools have been ground with a side rake as high as 60 deg. in order to take full advantage of the free-cutting characteristics of aluminum.

The clearance should be about 8 to 10 deg. The clearance must be carried around the side of the tool which advances into the work. This angle is important. If too small, the side of the tool will rub against the work and generate heat. If too large, the tool may tend to dig into the work or chatter.

In all cases it is essential that the cutting edges be keen, smooth, and free from grinding wheel scratches, burrs, or wire edges. Too much emphasis cannot be given to tool finish, because on it depends, to a large extent, the success of machining aluminum and its alloys. Keen edges are best obtained by finish grinding on a fine or very fine abrasive wheel, then hand stoning with a fine or very fine oilstone, or lapping, taking care that neither the angles nor the contour of the cutting edges are appreciably modified during the finishing operations. Where possible, cemented carbide tools should be diamond lapped.

Mechanical Finishing of Aluminum Alloys

	Roughing			Greasing or Oiling	Buffing	Coloring	Finish* Grinding
	Solid Wheel	Cloth Belt	Sewed Muslin				
Abrasive	Al_2O_3 or SiC	Al_2O_3	Al_2O_3	Turkish Emery	Tripoli	Fine Lime or Soft Silica	SiC
Carrier	Solid Wheel	Cloth Belt	Sewed Muslin Buffs	Sewed Muslin Buffs	Pocketed Muslin Buffs	Open Muslin or Flannel	Solid Wheel
Grit	16 to 100	46 to 300	46 to 80	120 to 240			30 to 40
Bond	Phenolic Resin	Glue	Glue	Glue			Vitrified
Hardness	Medium		Medium	Medium	Soft	Very Soft	Soft
Peripheral Speed of Wheel, feet per minute	6,000 to 12,000	3,000	6,000	6,000	7,000 to 8,000	3,000 to 4,000	6,000 to 7,000
Lubricant	Dry or Grease	Grease or Kerosene	Grease	Grease	Grease		Soluble Oil 1 to 35 or 40

* Mechanical finish applied to castings—to be preceded by machining.

From: "Machining Alcoa Aluminum," Aluminum Company of America

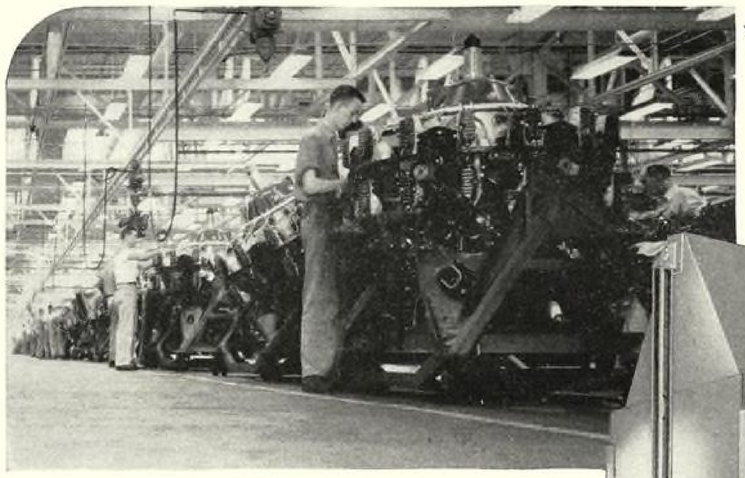

★ *Photograph courtesy Wright Aeronautical Corp.*

X-RAY EQUIPMENT

used for Inspecting Parts in

CYCLONE ENGINES THAT POWER OUR FLYING FORTRESSES

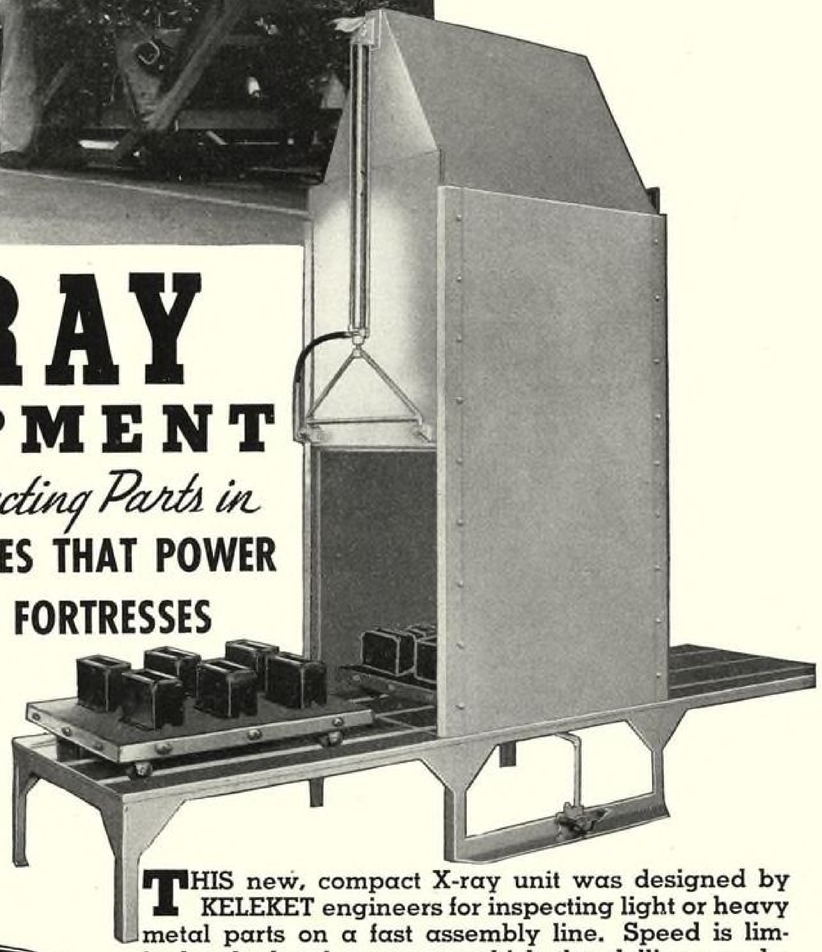

KELEKET X-RAY

Available with Complete Automatic Control

With this control, the unit opens and closes the doors, moves the dollies in and out, and exposes the films at the correct intervals — all automatically.

THIS new, compact X-ray unit was designed by KELEKET engineers for inspecting light or heavy metal parts on a fast assembly line. Speed is limited only by the rate at which the dollies can be loaded and unloaded — up to 5000 small parts have been radiographed in a single 8-hour shift.

This fast, efficient X-ray inspection tool is built to operate with your present assembly line, or can be adapted to any mass production operation.

KELEKET engineers will be glad to consult with you on any problem requiring high-speed X-ray inspection and explain how this equipment can be adapted to meet your requirements and specifications.

THE KELLEY-KOETT MFG. CO., Industrial Division
24012 West Fourth Street, Covington, Ky.
Representatives in 64 Cities

PIONEER CREATORS OF *QUALITY* X-RAY EQUIPMENT SINCE 1900

PERFECT COTTER PINS

SOLO'S *Precision Manufacturing*

PRODUCES PERFECT COTTER PINS

SOLO Cotter Pins meet the exact engineering specifications of all Army Navy and Air Force requirements. Their excellent performance is certain, because they are triple gauged and rigidly inspected for quality and uniformity.

Available from 1/32" x ¼" to ½" x 11" including all intermediate sizes. Made of low carbon steel, stainless steel, brass, zinc coated or cadmium plated steel. Standard, special or export packing to Army and Navy or your individual requirements.

For Immediate Delivery—On Perfect Cotter Pins

ADDRESS DIVISION 6

SOLO PRODUCTS CORPORATION

395 FOURTH AVENUE • NEW YORK, N. Y.

Information Tips

Keep UP-TO-DATE On Developments

This selected information on new publications and products is offered by the "AVIATION" Reader's Service through co-operation with the manufacturers. It helps executives save invaluable time, provides profit through convenience. To obtain literature or additional data on new products described, simply fill in form below, clip it to your letterhead, and mail. There is no cost, no obligation.*

Heat-treating 1
Brochure describing furnaces for heat-treating such aircraft parts as fuselages, struts, engine mounts, oil lines, propellers and other parts. The Surface Combustion Co., Toledo, Ohio.

Low Temperature Welding 2
A 36-page, illustrated booklet covering the *Castolin Eutectic Low Temperature Welding Process* giving data which can be used as a guide for welding problems of all kinds. Published by Eutectic Welding Alloys, Inc., 40 Worth St., New York, N. Y.

Electrostatic Heating 3
A profusely illustrated 22-page booklet titled *Thermex High Frequency Heating* describes industrial applications of the technique, and describes how it can be applied to non-metallic materials. Data sheet for inquiries seeking specific information and recommendations is included. The Girdler Corp., Thermex Division, Louisville, Ky.

Electric Connectors 4
Dealing with two leading types used in aircraft production, the condensed catalog supplement of Cannon Electric Development Co., Los Angeles, Calif., also gives information on connectors for radio microphones, sound equipment, power heavy-duty control circuits, public address systems and geophysical research, electronic low-level circuits and small power applications.

Abrasive Equipment 5
A new illustrated manual covering care of the Wheelabrator unit; general maintenance hints; electrical instruction; ventilation requirements; proper use of abrasive; operation of Wheelabrator Tumblasts. The American Foundry Equipment Co., 555 S. Byrkit St., Mishawaka, Ind. offers manual.

Copper Plating 6
A six-page leaflet designed to improve selective hardening and deep-drawing of steel describes the *Unichrome Alkaline Copper Plating Process* in deep-drawing of steel parts where a ductile, adherent coating of copper is required to act as a lubricant between work and the drawing dies. Bulletin No. 49, United Chromium, Inc., 51 E. 42nd St., New York, N. Y.

Micarta Data 7
Information on design and selection of Micarta, light, strong and resistant industrial plastic, is contained in 36-page *Booklet B-3184* offered by Westinghouse Electric & Mfg. Co., East Pittsburgh, Pa.

Barrel Pump 8
Engineering Bulletin No. 425, issued by Trabon Engineering Corp., Cleveland, describes company's new electro-hydraulic pump for pumping oils or greases directly from original containers. Pump operates from any electric outlet.

Bonding Ring 9
Bulletin on its new bonding ring is available from Cannon Electric Development Co., Los Angeles. Ring is used almost exclusively at present in bonding shielded radio and instrument circuits. May be used with either flexible conduit coupling nuts or cable clamps.

Drawing Problems 10
Drafting for Victory is title of new series of folders, prepared with cooperation of aircraft companies, offered by Eagle Pencil Co., 703 E. 13th St., New York. Folders deal with mechanical drawing problems for basic instruction in aircraft drafting.

Tooling Set-Ups 11
Details of six different set-ups for Universal Slotmaster showing ways machine can be used to save tooling cost and time, are presented in new edition of four-page brochure offered by Experimental Tool & Die Co., 12605 Greiner Ave., Detroit.

Alloy Chart 12
Analyses, physical characteristics, and applications of 19 different stainless steel, Monel, and nickel alloys are included on compact chart available from the Cooper Alloy Foundry Co., 200 Bloy St., Hillside, N. J. Also given are handy cross references of designations and type numbers of institutes, societies, United States Navy, and others.

Grinding Wheels 13
Twenty-six page photo-and-diagram illustrated data booklet, *Grinding Wheels, Their Construction and Selection*, has been published by Mid-West Abrasive Co., 1960 F. Milwaukee Ave., Detroit. Described are various types of grinding wheels, honing, and superfinishing stones, and there are tables and charts detailing specifications, wheel speeds, spindle diameters, and wheel weights.

Flexible Shaft Machine 14
Numerous flexible shaft devices, their many uses and specific applications, are covered in *Catalog No. 30*, newly issued by Foredom Electric Co., 27 Park Place, New York. Kits, machines, grinders, and accessories are covered in well illustrated ten-page publication.

Bearing Lubrication 15
SKF Industries, Inc., Philadelphia, has published *A Guide to Better Bearing Lubrication*. Thirty-two pages are filled with designs, formulas and graphs explaining highly technical functions, phases, and practical problems of correct ball and roller-bearing lubrication.

Flexible Aircraft Controls 16
Handbook of instructions on how to install and maintain Simmonds-Corsey flexible aircraft controls has been issued by Simmonds-Aerocessories, Inc., 10 Rockefeller Plaza, New York, aircraft accessory and precision instrument maker. Special feature of handbook is two-page drawing of typical control layout.

Process Control 17
The Brown Instrument Co., Wayne and Roberts Aves., Philadelphia, has recently published a 64-page booklet titled *The Technique of Precision Control in Industrial Processes*. (Booklet 80-1) Information on precision measurement, fundamentals of control, types, and typical applications are offered. There are numerous schematic diagrams and illustrations of systems and apparatus.

Alloys 18
Revised *Duronze Manual*, published by Bridgeport Brass Co., Bridgeport, Conn., has just come from press. Eighty-page booklet contains technical data and applications for five different Duronze alloys supplied in sheet, rock, wire, tubing, and ingot. Includes numerous compositions, specifications, curves and tables.

Bolts, Screws, Rivets 19
Comprehensive new 228-page catalog has been prepared by National Screw & Manufacturing Co., Cleveland. A 50-page aviation products section gives full information on company's bolts, nuts, screws, plotters, etc., used in aircraft industry.

Metal Parts Washers 20
Various types of Detrex washers for use with alkali cleaning compounds, petroleum spirits, and emulsion cleaners are pictured and described in new 24-page booklet announced by Detroit Rex Products Co., 13005 Hillview Ave., Detroit. Special aircraft industry adaptions are given.

Radio Motors 21
Catalog No. 100, issued by Carter Motor Co., 1608 Milwaukee Ave., Chicago, illustrates and describes dynamotors, converters, and hand generators for radio communication. Special attention is drawn to small, light PM dynamotor, 100-watt model of which weighs but 4¾ lb.

Calendar 22
"Elephant size dates" are feature of *New Engineer's 1943 Weekly Calendar* prepared by Frederick Post Co., Box 803, Chicago. Over-all size is 15¾x24½ in. Technical data of value to engineers are included.

Forge Welder 23
Temp-A-Trol, recently announced machine stated to offer new approach to resistance welding, is described in *Bulletin No. 301* released by Progressive Welder Co., 3050 E. Outer Drive, Detroit. Combined automatically controlled spot welding and heat-treating of alloy steels is special feature of unit. Bulletin shows line drawings of thermocouple electrodes, typical welds made with unit, comparisons of grain structure, diagram of automatic phase-shift heat control, etc.

Flexible Drill Shaft 24
Bulletins 421, 422 and 427, available from the Stow Manufacturing Co., Binghamton, N. Y., describe flexible extension for electric drill, enabling work around corners, in close quarters, and other places where regular drill cannot reach. Drill adapter, park angle head, and collet angle head are likewise detailed.

Aero Engine Overhaul 25
Equipment and procedure for improved fast method of degreasing and decarbonizing aircraft and other engine parts for overhaul is described in 16-page booklet recently issued by Turco Products, Inc., of Los Angeles and Chicago. Titled *Turco Procedure for Aircraft Engine Overhaul*, it includes many diagrams and photographs.

New Products

LATEST MACHINE TOOLS

Small Gear Finisher 26

With great new demand for small gears (¼ to 4-in. pitch diameter) for use in navigation instruments, gun sight mechanisms, bomb sights, etc., **National Broach & Machine Co.**, Detroit, has developed Red Ring (Model GCL-3" gear finisher, special shaving machine to speed critical operation of finishing such small instrument gears. Company reports unit is capable of finishing-job of 8 to 48 sec. per gear, handling gears with diametral pitches of from 20 to 48 and even finer. Model is essentially bench-type machine, but it is also furnished with base containing ample coolant system and electric-control panel. Unit being small, battery of machines may be mounted on bench with central coolant system. Model incorporates principle of rotary crossed axes shaving, using gashed helical cutter which drives work gear as it cuts. Cutter rotates only in one direction, and because there is no intermediate gear train between cutter and work, possible inaccuracies from such cause are avoided. In addition to cutter spindle drive, functional parts consist of two slides (vertical with cutter head and horizontal carrying work) both of which are provided automatic lubrication by pump mounted in column. For various sizes of work gears, initial vertical adjustment of cutter-head slide is made by means of screw and calibrated hand wheel, and indicator provides constant check of size of finished product. Precision bearings of cutter spindle may be adjusted without dismantling cutter head. Three speeds of cutter spindle and of table

AVIATION READER'S SERVICE DECEMBER
AVIATION, 330 W. 42nd St., New York, N. Y.

INFORMATION TIPS
Please send me additional information described as identified by key numbers circled.
1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19
20 21 22 23 24 25

NEW PRODUCTS
Please send me more information on New Products according to key numbers circled.
26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44
45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63
64 65 66 67 68 69 70 71 72 73 74 75 76 77

NAME.....
TITLE.....
COMPANY OR AFFILIATION.....
ADDRESS.....
CITY AND STATE.....

19 PLACES TO GET A 50% SAVING IN ASSEMBLY TIME

To back up your industry with a continuously plentiful supply of one of your most-in-demand items, a total of 19 screw manufacturers have been equipped to produce time saving, trouble-saving Phillips Recessed Head Screws.

Tremendous manufacturing capacity . . . nationwide distribution . . . are augmented by a corps of 150 sales engineers, qualified to help you get the most from Phillips. In the average case, they can show you how to save 50% in assembly time — eliminate operations, prevent accidents, eliminate burrs, get stronger fastenings.

The shape, taper and depth of the Phillips recess were determined after thousands of tests. The drivers maximum turning power is utilized without sacrifice of strength in the screw head . . . without danger of shearing the metal or breaking the bit. That's why the majority of units turned out by leading aviation and automotive concerns are Phillips-assembled.

Phillips Recessed Head Screws

WOOD SCREWS • MACHINE SCREWS • SHEET METAL SCREWS • STOVE BOLTS • SPECIAL THREAD-CUTTING SCREWS • SCREWS WITH LOCK WASHERS

19 SOURCES of SUPPLY

Order stronger, cost-cutting Phillips from any of these sources

American Screw Co., Providence, R. I.
The Bristol Co., Waterbury, Conn.
Central Screw Co., Chicago, Ill.
Chandler Products Corp., Cleveland, Ohio
Continental Screw Co., New Bedford, Mass.
The Corbin Screw Corp., New Britain, Conn.
International Screw Co., Detroit, Mich.
The Lamson & Sessions Co., Cleveland, Ohio
The National Screw & Mfg. Co., Cleveland, Ohio
New England Screw Co., Keene, N.H.
The Charles Parker Co., Meriden, Conn.
Parker-Kalon Corp., New York, N.Y.
Pawtucket Screw Co., Pawtucket, R.I.
Pheoll Manufacturing Co., Chicago, Ill.
Russell, Burdsall & Ward Bolt & Nut Co., Port Chester, N.Y.
Scovill Manufacturing Co., Waterbury, Conn.
Shakeproof Inc., Chicago, Ill.
The Southington Hardware Mfg. Co., Southington, Conn.
Whitney Screw Corp., Nashua, N.H.

reciprocation are available. Specifications: Cutter head, spindle speed, 200, 350, and 500 rpm.; work table, length of travel (one stroke) 0 to ½ in.; strokes per cycle, 4, 6, or 8; table feed strokes per min., 10, 20, or 30.—AVIATION, *December,* 1942.

Plywood-Plastic Curer 27

Use of plywood being augmented in the aircraft industry, attention is drawn to Vitacap Chamber offered by **American Tire Machinery Co.**, 810 E. 61st St., Los Angeles, for curing laminated (hot form) plywood, plastics, and synthetics. Unit illustrated, 45-in. o.d. by 48-in. deep, is used in mak-



ing of airplane parts. Maker reports availability of chambers in diameter dimensions of 45, 56, 75, and 90 in., and special materials may be secured for special custom jobs of other sizes. Positive seal, quick closing and locking doors are feature of units, which are built for 90-lb. working pressure. In addition to straight steam hook-up, chambers may be used for high-pressure, low-temperature curing through a combination air-steam installation. AVIATION, *December,* 1942.

Drill & Bore Machine 28

Model 445, new independent, two-spindle, deep hole drilling and boring machine, announced by **W. F. & John Barnes Co.**, Rockford, Ill., is designed to drill or bore two parts simultaneously in completely independent cycles. Supported by separate steadyrests, each workpiece is driven by independent headstocks. Tools are fed by independent hydraulically actuated slides. Normally, four-jaw, 15-in.-dia. chucks are furnished, but those of 24-in. dia. may be used. Screw adjustment on steadyrest rollers permits handling 5-in. to 16-in. o.d. work. Steadyrest tops are hinged to facilitate workpiece handling when loading and unloading. Hydraulic feed cylinders in base are actuated by two motor-driven hydraulic feed and traverse units. Specifications of machine, which may be completely controlled from each of four pushbutton stations, follow: Stroke 16 ft., swing 25-in. dia., length of part 15 ft. 8 in. max., tool size 5-in. dia., spindle centers 26-in. dia., spindle height from ways 20-in. dia., spindle hole 4¼-in. dia., and approximate weight 83,000 lb.—AVIATION, *December,* 1942.

Cutout-Coil Welder 29

Low open-circuit value of 42 is feature of "Bumble Bee" portable, transformer-type AC welding machine offered by **Wilson Welder & Metals Co.**, 60 E. 42nd St., New York. Two 42-v. primary coils are used, with magnetic contactor in circuit of one primary. However, one primary automatically cuts out when machine is idle, only being thrown into circuit when electrode contacts work. When operator draws arc, open circuit potential of two primaries (84-85 v.) enables him to establish arc quickly and begin welding. On pulling out arc at completion of welding (most of which ranges between 32 and 40 v.) arc voltage rises. But on reaching 45 v., one primary cuts out. Power factor correction in this 18-in. wide unit is provided by built-in capacitors on all four sizes—300, 500, 750, and 1,000 amp.—which likewise cut out when machine is idle. Welder has dual voltage connections for either 220 or 440 v., cutout coil assures thermal overload protection, and handwheel control offers current adjustments throughout NEMA range.—AVIATION, *December,* 1942.

New Products

Cylindrical Finisher 30

Wide variety of applications is featured by the "OD" (outside diameter) cylindrical finishing machine introduced by **Hammond Machinery Builders,** 1638 Douglas Ave., Kalamazoo, Mich. Arrangement of machine with special wheel polishing member is illustrated.

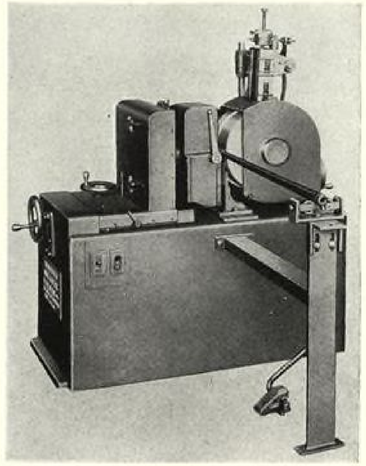

Machine may also be set up with back stand idler pulley and patented segment face contact wheel permitting use of surface-coated abrasive belts,

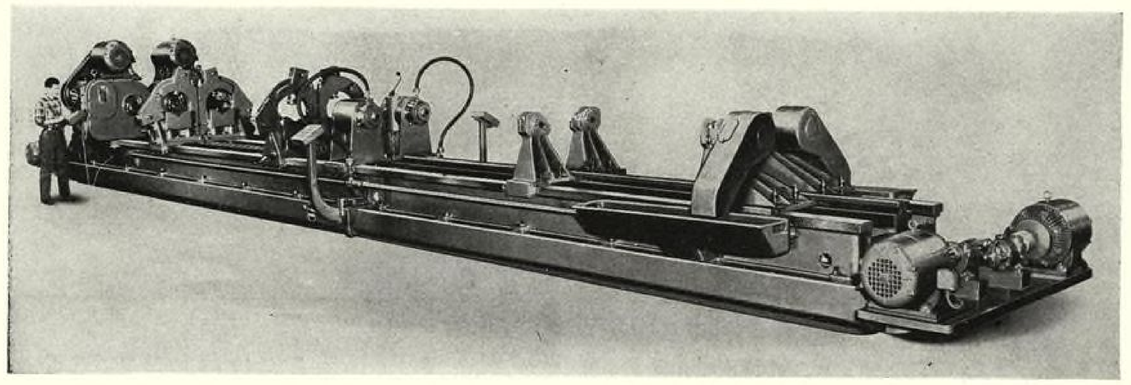

running over face of wheel and to back stand for finishing and polishing many additional materials and shapes of articles. New abrasive belt method is said to effect striking savings while increasing production. Unit is designed with range of feed of 9 to 50 ft. per min. for 1-in. dia., forward or reverse, permitting good production by even "green" operators. There is simple adjustment of work support to wheel for items of varying diameters. Work support may be firm's standard or one specially built for customer's requirements. — AVIATION, *December*, 1942.

Turret Lathe 31

A new floor-type turret lathe, designed for rapid production on close tolerances of small chucking or bar work, is being introduced by the **South Bend Lathe Works**, Department X5, South Bend, Ind. Second operation work can also be handled efficiently, it is said. The lathe has a 10-in. swing over the bed or saddle swings, 1⅜-in. hole through the headstock spindle and 1-in. collet capacity. It is equipped with both compound rest cross slide and a handlever cross slide, which are interchangeable. Quick change gear box supplies 48 longitudinal power feeds for the universal carriage, 48 power cross feeds for the compound rest cross slide, and 48 thread cutting speeds, 4 to 224 per inch. There are twelve spindle speeds ranging from 50 to 1,357 rpm. —AVIATION, December, 1942.

Riveting Machine 32

To expedite flush riveting in aircraft production, the **Tomkins-Johnson Co.**, Jackson, Mich., has developed the Rivitor, air-powered riveting unit with automatic feed and setting mechanism. Air pressure, supplied by cylinder, is applied and stepped up via a toggle. Machine is designed with capacity for ¼-in. dia. by ¾-in.-long rivets. Other features: Vertical adjustment of lower tooling without disturbing upper-lower tooling alignment, also adjustable setting tools. Common variations in thickness of materials riveted is cared for automatically, while manual adjustments are provided for major variations.—AVIATION, *December*, 1942.

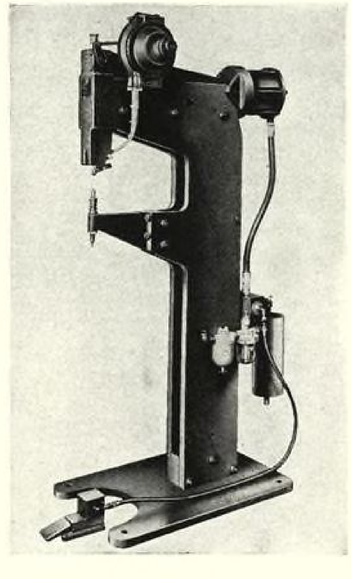

New Products

Tapping Machines 33

Line of high-production precision tapping machines — including both light-duty (Series LTM) and heavy-duty (Series HTM) types—has been

RYERSON

Reliable Source of Supply for SPECIAL AVIATION STEELS

Specialized skill and experience built up in 100 years of steel-service to American Industry — vast tonnages of steel which move steadily through ten great Ryerson plants into war production — are at aviation's command.

For example, recently eighty seven bombers were held up awaiting delivery of 2⅜" rounds of WD-X4130. A Ryerson Steel-Service man was called at his home on a Sunday evening. Within a matter of minutes, Ryerson stocks in ten cities were being checked. All were temporarily out of the desperately needed bars—all but one.

A shipment of 2⅜" WD-X4130 rounds was just arriving at one of the Ryerson plants. The car was immediately opened and the same evening the steel was on its way to the airplane builder. A production bottleneck was broken.

When steel is needed in a hurry —and it often *is*, under pressure of war production — *call Ryerson!* If the required steel is to be had anywhere, Ryerson can, and will supply it!

JOSEPH T. RYERSON & SON, INC.
Chicago, Milwaukee, St. Louis, Cincinnati, Detroit, Cleveland, Buffalo, Boston, Philadelphia, Jersey City

Avoid Production Delays with MOULDED PLYWOOD Parts

Aft-Deck Skin for Large Cargo Ship.

Plastic-Bonded Moulded PLYWOOD is ideal for many aircraft components. It has great strength, light weight, a smooth surface, can be moulded to practically any shape and may be reinforced for added rigidity. Inquiries from prime and subcontractors are invited. Our Engineering Staff will gladly recommend how Moulded PLYWOOD parts can help you speed your production.

Saves Scarce Metals

Moulded PLYWOOD also stretches the available supply of critical materials. It saves scarce metals for use where only metal parts can safely be employed. Conserve and produce.

AVIATION ENGINEERING INC.

1392 BLASHFIELD, S.E. ATLANTA, GEORGIA

T. Edward Moodie, Vice-President and Chief Engineer

Fabricators of:

PLASTIC BONDED PLYWOOD AIRCRAFT COMPONENTS

Ailerons, Flaps | Rudders, Elevators | Bomb Bay Doors, Tail Cone Fairings | Landing Gear Doors, Fins | Nacelle Fairings, Entrance Doors | Super-Structures, Stabilizers, Etc.

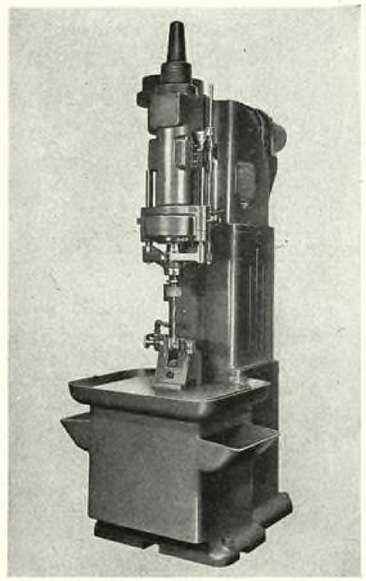

brought out by **Detroit Tap & Tool Co.**, 8432 Butler St., Detroit. Though designed as "specials," units lend themselves to variations, such as provision of single or multiple tapping heads, use for oil grooving, or long lead tapping. Inaccuracies resulting from lead-screw "wind-up" are avoided by use of lead screw which isn't required to drive tap. Lower end of tapping spindle is guided through entire stroke to assure accuracy, to avoid oversize hole tapping, and to permit accurate precise deep-hole tapping. Light-duty type taps up to ⅜-in. dia. and 14 pitch in steel, maximum stroke of unit is 6 in., and three spindle speeds are provided ranging from 100 to 400 rpm. Heavy-duty machine has pick-off change gears between spindle and cone-drive-gear first reduction for changing of spindle speeds. Maximum stroke is 8 in., and holder allows taps to float horizontally only, without end play. Machine height of both units may be varied, and pedal, manual, or automatic-operating indexing fixtures are available. Intermediate capacity units, between light-duty (left above) and heavy (right), may be obtained.—AVIATION, *December*, 1942.

Control-Cable Tester 34

Drawbar dynamometer scale for testing control cables for stretch, guaranteed tensile strength, and ultimate breaking strength is announced by the **Kron Co.**, Bridgeport, Conn., maker of dial scales. Scale has 30,000-lb. capacity and dial chart has 25-lb. graduations. Both indicating point and dead needle remain in place to show ultimate testing strength following cable ruptures. Aircraft controls cables are attached to each other end-on-end and are roved back and forth between top and bottom sets of grooved sheaves. Control of hydraulic pressure, which produces cable tension, is at same end

of equipment as dynamometer scale, enabling rapid tests by one man. Shock absorber protects against back lash injury from cable rupture at full tension.—AVIATION, *December*, 1942.

Production-Line Conveyors . . 35

Overhead conveyors, for use in any production involving a series of finishing operations and enabling careful control of speed and flow of material, are marketed by **Lamson Corporation**, Syracuse, N. Y., maker of material handling equipment and pneumatic tube systems. Conveyor keeps work ahead of every worker, there are no waits for parts.—AVIATION, *December*, 1942.

KOLD-HOLD

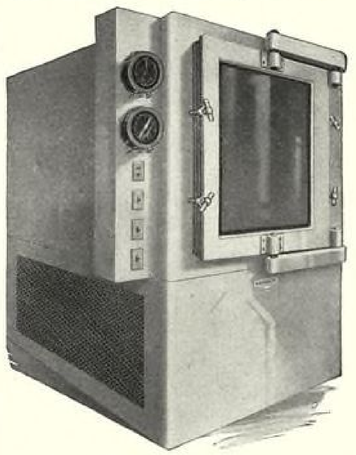

The "G.H.Q." for Latest Stratosphere Data

For testing aircraft instruments and parts under conditions duplicating those found at higher altitudes make KOLD-HOLD your "General Headquarters" for stratosphere information. The KOLD-HOLD Stratosphere shown here, reproduces actual flying temperatures and pressures at will . . . controlled accurately when and where you need them.

In addition, visibility is always excellent . . . you can SEE the performance of instruments and devices with moving parts through the large Thermopane glass panel. Where requirements demand, stroboscopic beams may be directed through the panel to slow down the action and provide lubricant viscosity tests at the same time for charting and recording.

KOLD-HOLD's engineering service is ready to cooperate . . . send your requirements for complete recommendations.

NEW YORK—1819 Broadway—Circle 63092
CHICAGO — 201 N. Wells — Randolph 3986
LOS ANGELES—1015 W. Second—Mich. 4989

KOLD-HOLD MANUFACTURING CO.
442 N. Grand Ave., LANSING, MICH., U.S.A.

NOW.. Speed Nuts for Plywood

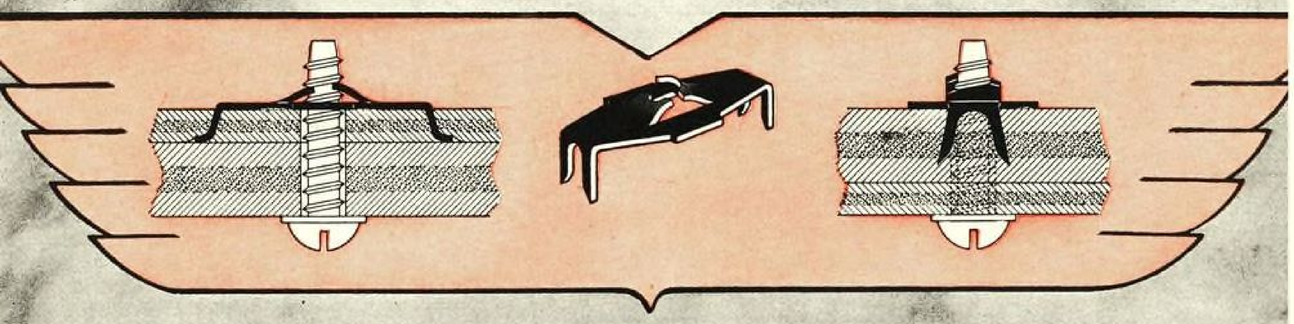

IN CANADA
Wallace Barnes Co., Ltd., Hamilton, Ontario
IN ENGLAND
Simmonds Aerocessories, Ltd., London

Faster Application • Lighter in Weight

• The need for the basic SPEED NUT principle of spring tension is even greater in plywood. SPEED NUTS have a WIDE BEARING SURFACE which eliminates the need of a spanner washer beneath the nut.

This new SPEED NUT FOR PLYWOOD No. 6279, illustrated above, is the only self-locking nut which can instantly be driven into anchored position. When driven into THIN plywood sections the attaching legs are "peened" over against a backing plate. When used with THICK plywood, the cam-like structure of the attaching legs forces them outward, as they are driven deeper into the wood. This gives the Speed Nut a firm spring tension grip on the wood. WEIGHING BUT 3½ LBS. PER THOUSAND, they are available for use on both AIR CORPS 530-8 and AIR CORPS 530-10 sheet metal screws. Write for bulletin 168 and samples.

TINNERMAN PRODUCTS INC., 2070 Fulton Rd., Cleveland, O.

THE FASTEST THING IN FASTENINGS! Speed Nut System

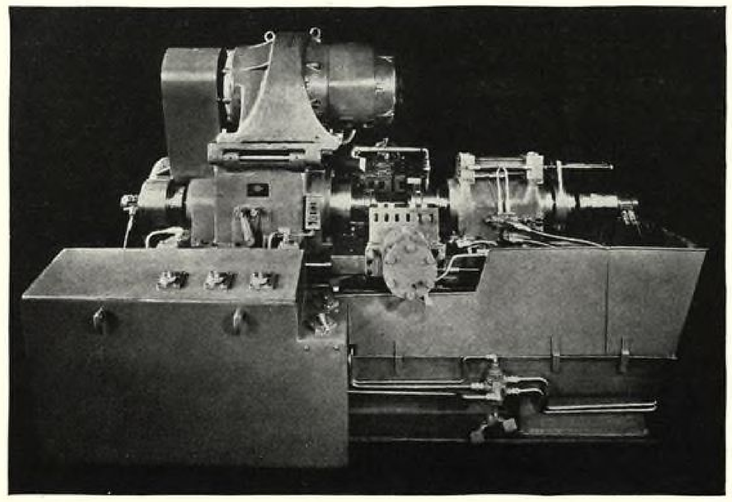

Cylinder-Turning Lathe 36

Heavy-duty, semi-automatic, cylinder-turning lathe, announced by **Sparks Machine Tool Corp.**, 32 Main St., Norwalk, Conn., accommodates six turning tools on front cross-slide for main body turning, using hydraulically operated cartridge tool holder, and "takes" another six tools on back slide, likewise worked automatically. Especially designed for turning of heavy airplane engine cylinders, machine has headstock with four selective speeds for work on different size cylinders, and motor has reduction gears for slow speeds when turning exceptionally hard cylinder material. Feeds are all controlled through metering valves convenient to operator. A treadle actuates holding equipment. Crated ready for shipment, lathe weighs approximately 13,800 lb.—AVIATION, *December*, 1942.

Rapid Parts-Hardener 37

Surface hardening of intricate-design metal parts at rapid rate is feature purpose of Tocco Junior induction-hardening machine offered by **Tocco Division, Ohio Crankshaft Co.**, 3800 Harvard Ave., Cleveland. Process is automatic once shafts are placed on fixture guiding them into electric inductor. Machine has indexing mechanism permitting regular interval stopping of shafts during fixture travel. Areas hardened are so well defined, says company, that remainder of shaft is not heated, thus minimizing distortion.—AVIATION, *December*, 1942.

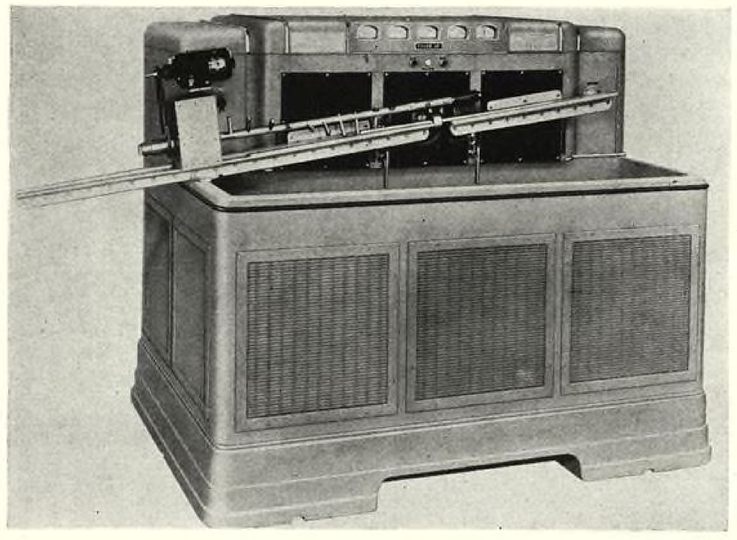

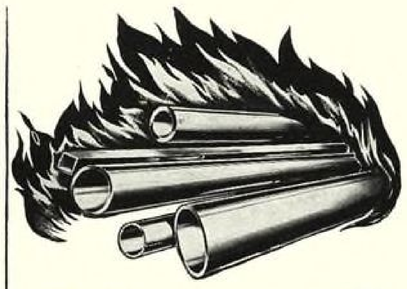

IF IT'S **HEAT RESISTANCE** YOU WANT

Exhaust collector rings, machine gun blast tubes and other products withstand corrosion and high heat, they have *longer service lives*—thanks to Carpenter Welded Stainless Tubing.

The *uniform wall thickness* of this tubing means that there are no thin spots to "burn out" first. And it is ductile, easy to fabricate—thus helping to speed the production of vital wartime equipment that must win battles against excessive heat. Then too, tubes are *natural design units*. Parts can often be finish-formed by merely swaging, tapering, expanding, etc.

If you have a wartime heat resistance problem that must be solved right now, take advantage of Carpenter's diversified experience in many plants where similar problems have been met and solved.

FOR HELP in applying Welded Stainless Tubing, ask for our series of "Quick Facts" bulletins. They contain practical working information to help you with new design and fabricating problems. A note on your company letterhead will start a set of "Quick Facts" bulletins on the way to your desk.

CARPENTER WELDED STAINLESS TUBING
meets Army and Navy specifications; resists corrosion, heat, wear; is 100% hydrostatically tested.

THE CARPENTER STEEL COMPANY
Welded Alloy Tube Division
Kenilworth, N. J.

Carpenter
WELDED
STAINLESS TUBING

SHOP EQUIPMENT & ACCESSORIES

Arc Control Stations 38

Wilson Welder & Metals Co., New York City, reports greater welding output per machine, better control by operator, and improved welds on thin gage metal through use of its Honey Bee arc control station. Stations are made in 75 and 150-amp. capacities. Two or more units (see photo) may be



hooked to single generator for operation of a like number of arcs simultaneously. Each operator may set unit to deliver definite current at arc for steady welding, or with hand switch he may vary current without breaking arc, enabling hot-arc start on cold metal with reduction of current as work warms up. When in series, each operator can regulate own current. And remote control of arc, at end of bead, permits improved quality of weld deposit at crater.—AVIATION, *December,* 1942.

Crane-Truck Combination . . . 39

Designed to perform the functions of a load carrier crane and tractor, the new unit manufactured by the **Elwell-Parker Electric Co.**, Cleveland, Ohio, has an unobstructed platform 40-in. wide x 80-in. long x 25-in. high. Crane capacity is 2,000 lb. at 42 in. on the boom; tractor speed is 5 mph. It operates with two-wheel drive and four-wheel steer. Frame is made up of heavy section formed plates welded into one-piece structural unit embodying control dash.—AVIATION, *December,* 1942.

Two-Way Radio 40

Two-way aircraft radio, consisting of three separate units for ease of installation, is announced by **Electronic Specialty Co.**, Los Angeles, manufacturer of Ranger radio line. Set includes Model 503 power supply operating from a plane's 12-v. storage battery. Model 110 receiver which has both 195-410 kc. band and spot frequency pre-tuned to 3105 kc., and Model 206 10.5-w. output transmitter operating on 3105 and 6210 kc. Units are connected by flexible cables permitting considerable flexibility in installation. In addition to "spot" frequency, receiver is equipped with two-way interphone circuit for communication between pilot and observer. Three units combined weight 19 lb. 2 oz.—AVIATION, *December,* 1942.

Power Lift Truck. 41

A new electrically operated lift truck called the PowerOx marks entry into the power driven lift field by **Barrett-Craven Co.**, 3262 W. 30th St., Chicago, Ill. Capacity of the new unit is 4,000 lb., widths are 19 and 25 in., platform lengths are 48 and 60 in., and lowered heights are 7, 9 and 11 in. Two electric motors drive rear wheels independently. Lift mechanism is the standard Barrett unit of multiple stroke design. Batteries provide for 8 to 12 hrs. continuous operation. Motive power is applied by hand control—forward or backward twist of the wrist determining direction. —AVIATION, *December,* 1942.

Small Air Clamp 42

Convenient-sized air clamp delivering 80-lb. pressure on line pressure of 100 lb., has been designed for aircraft industry by **Mead Specialties Co.**, 15 S. Market St., Department M-17, Chicago. Known as Mead Midget, unit is for assembly jigs and other multiple applications. Description and features: Lock-up and release of assemblies is said to be instantaneous, compact size permits installation in cramped corners, special adjustments are stated to be unnecessary since air clamps ram holes with equal pressure at any point along bulk. Group of units can be controlled independently of other groups in given assembly. Stroke of the ram is $\frac{5}{8}$ in.—AVIATION, *December,* 1942.

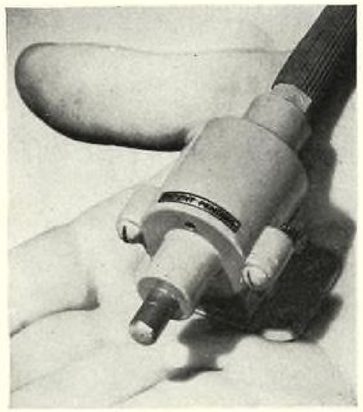

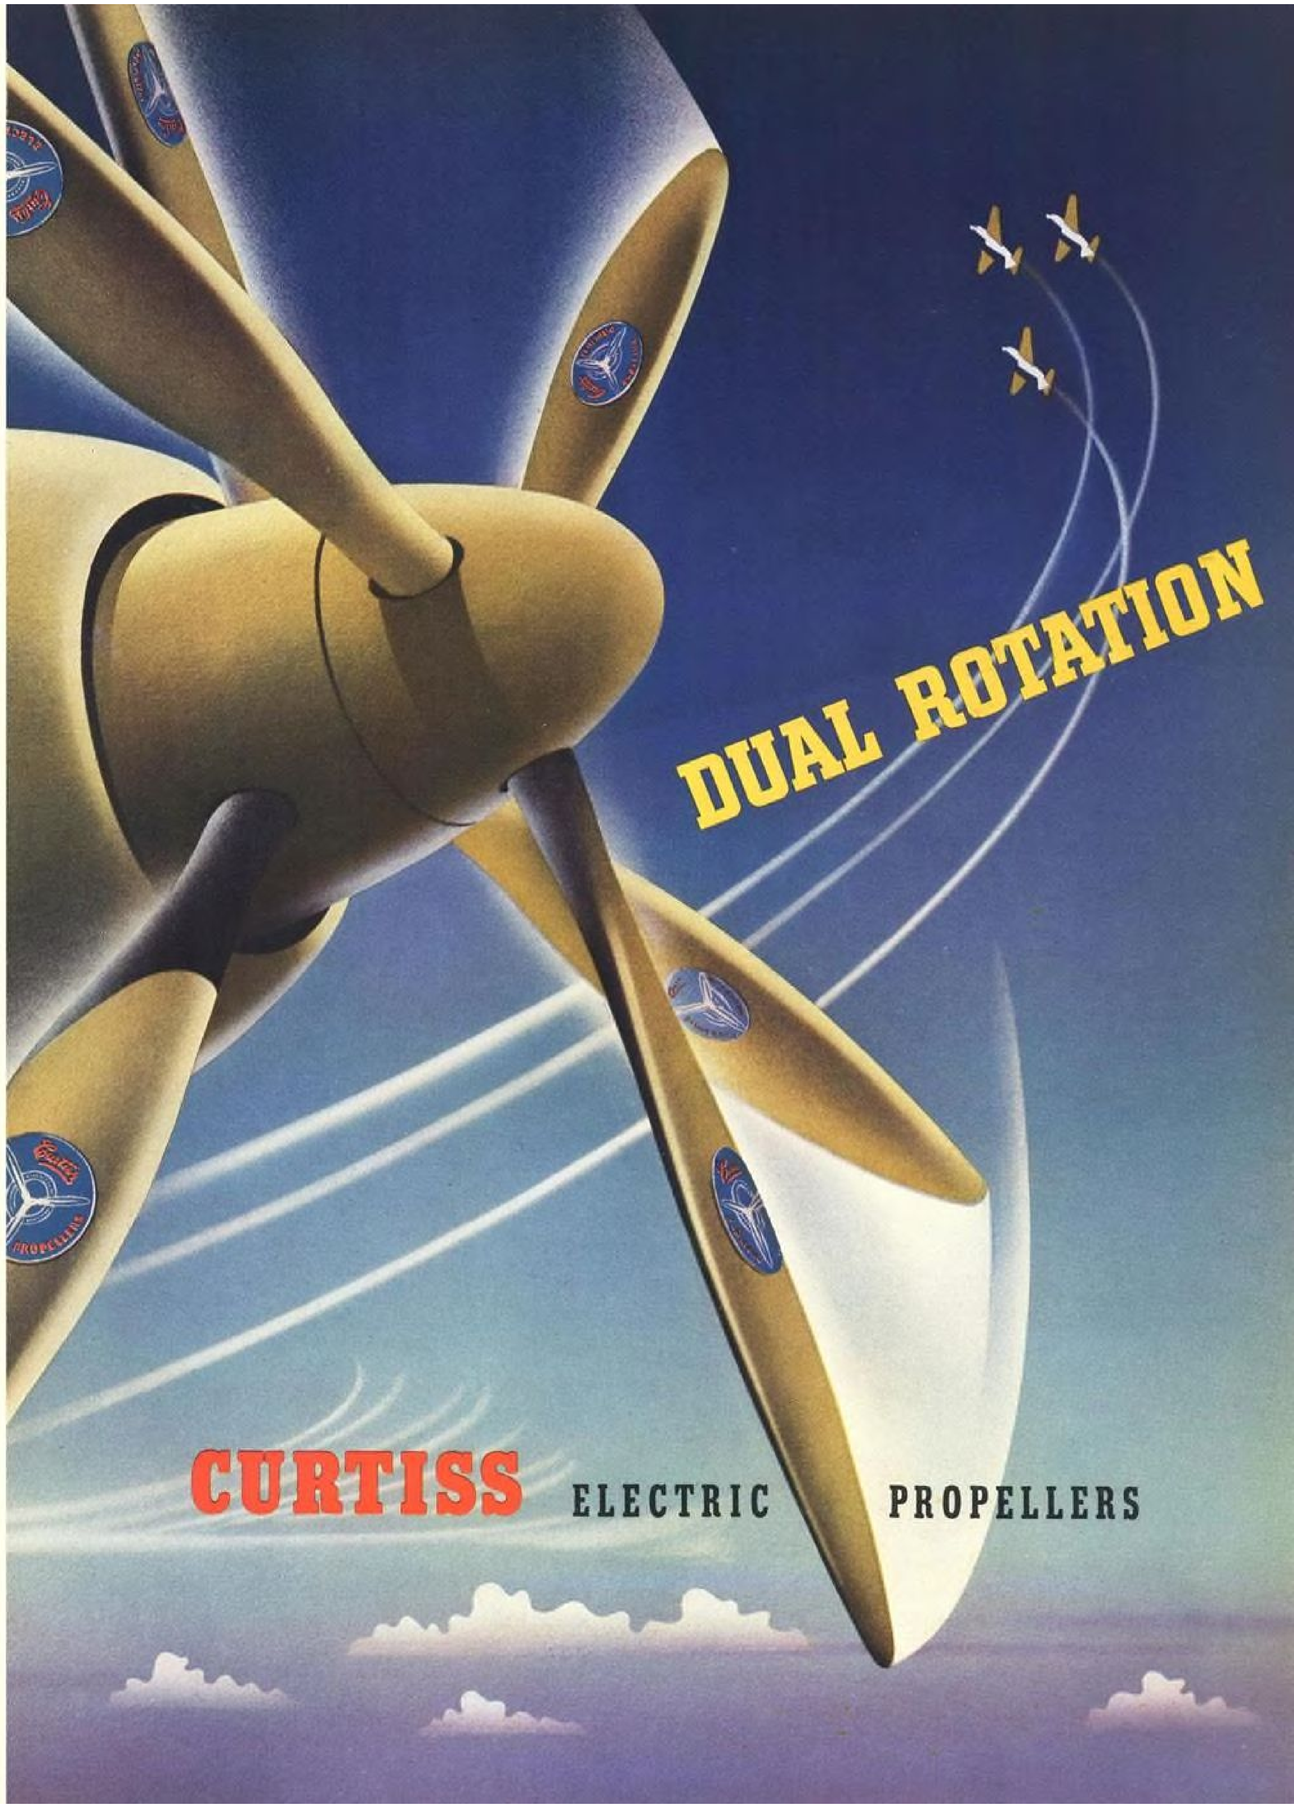

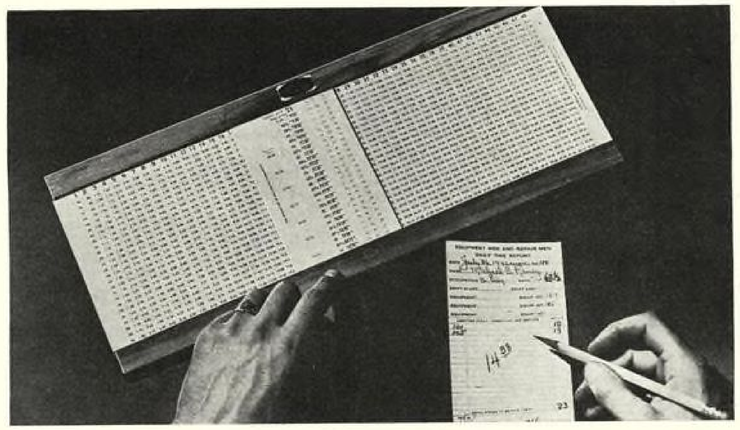

New Products

Wage and Cost Calculator . . . 43

Payroll and job costs are stated to be calculable in fraction of usual time through use of device offered by **Berger-Bricker Co.**, 433 S. Spring St., Los Angeles. Calculator includes all hourly rates of pay from 50c. to $1.75, with ½c. spread between rates. It covers all time periods up to 104 hours with 1/10-hr. divisions.—AVIATION, *December,* 1942.

Engine Assembly Stand 44

A new engine assembly stand, known as the Model E3, for holding large in-line aircraft engines in any desired position during assembly or overhaul, is now being manufactured by the Aviation Division, **Whiting Corp.**, Harvey, Ill. Its important features are the rotating rings and horizontal tubular members to which the engine brackets are bolted. This design reduces the stand's superstructure to a minimum and provides complete accessibility to all parts of the engine at all times during its build-up. The engine is quickly and easily bolted into position and the entire unit is readily maneuverable in the production line or other congested places.—AVIATION, *December,* 1942.

Metal Cutting Coolants 45

A new line of metal cutting coolants has been developed by the **Gray-Mills Co.**, Chicago, Ill., enabling their nation-wide distribution outlets to offer immediate deliveries from stock. Realizing the inconvenience to many shops in purchasing large quantities, the new Gray-Mills "Flo-Bac" coolants are offered in a wide range of container sizes: 3, 5, 15, 30, 50 and 55 gal. They are manufactured in four types to cover practically every requirement and are available in wooden containers (to conserve steel and expedite shipments) on priorities up to A-10. Steel containers require A-1-J or better.—AVIATION, *December,* 1942.

Bar and Part Storer 46

For movement and storage of long bars and odd-shaped parts, the **Union Metal Mfg. Co.**, Canton, Ohio, has developed a special open-end inverted skid. Applicable for aircraft plant use, unit was formed from company's standard all-steel skid platform, turned upside down and equipped with eyed brackets for insertion of crane hooks.—AVIATION, *December,* 1942.

Rivet Sets 47

Enlargement of its line of Aerocraft rivet sets to include practically every type known to be in use in aviation industry is announced by **Aircraft Tools, Inc.**, Los Angeles. Line now includes all standard sizes of straight-type round head, brazier head, flat head, and modified brazier head, from $\frac{3}{32}$ to $\frac{1}{4}$-in. dia.; offset-type with round head, brazier head, flat and modified brazier head from $\frac{3}{32}$ to $\frac{1}{4}$ in.; swivel type flush rivet sets, straight flush rivet sets with $1\frac{1}{4}$-in. heads, and hand rivet squeezer sets in $\frac{3}{32}$, $\frac{1}{4}$, $\frac{3}{32}$ and $\frac{7}{32}$-in. round and brazier heads.—AVIATION, *December,* 1942.

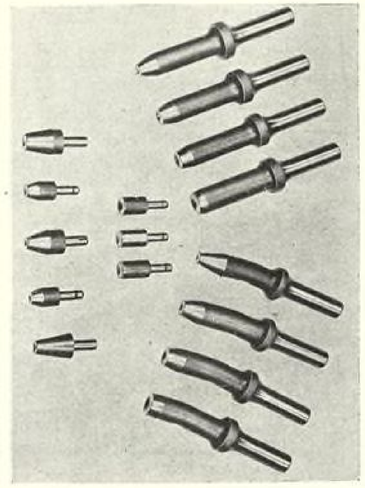

Junior Pneumatic Vise 48

New addition to line offered by **Production Devices, Inc.**, Poultney, Vt., is Airlox Junior pneumatic vise for milling, drilling, tapping, filling, and assembly operations. Quick acting for speedy operation, unit is stated to offer these features: Accessible screw adjustment to locate adjustable jaw, bolts to lock jaw in position, inclosed mechanism to afford protection from chips or foreign elements, and key-wayed design for precision work. Specifications: Dimensions $10x5\frac{7}{8}x4\frac{1}{2}$ in.; jaw width, $4\frac{3}{4}$ in., depth $1\frac{1}{8}$ in.; weight approximately 25 lb., and gripping force on work approximately 20 times air line pressure during last $\frac{1}{8}$ in. of jaw travel.—AVIATION, *December,* 1942.

Speed
Accuracy
Low In Cost

HONE TO VICTORY

Super-Smooth Finish
Inexpensive to Operate

With THE SUNNEN PRECISION HONING MACHINE

SPEED to meet today's ever-increasing demand for vital implements of mechanized war.

ACCURACY to insure fewer rejects and absolute interchangeability of parts. Super-smooth finish.

LOW COST — Both initial and operating.

WIDE RANGE — Handles any internal diameter from .185" to 2.400".

EASY TO OPERATE — Workers in "teens" — even girls — can be trained to do expert work in a few hours.

CONSERVES — Relieves big internal grinders for other jobs. No fixtures needed — work held in hand.

These are only a few of the reasons why it will pay you to put Sunnen honing to work in *your* plant — as it has hundreds of leading manufacturers.

Aluminum Aircraft Link "produces high finish without bell-mouthing."

Inner Bearing Ring "Accurately removes last 'tenth' of stock."

"Strict alignment maintained between two holes."

Drawing and Blanking Die "Saves time in producing smooth base metal finish."

Bronze Valve. The Sunnen method of honing is used to secure a high finish and accuracy.

Cones for Wheel Balancing Machine "Accurately align hones two interrupted surfaces."

Saved time in producing a smooth, accurate finish on this bronze remote control valve body.

Aviation Hydraulic Cylinder made of Aluminum-Alloy. Improves the quality of the bearing surface. An extremely smooth surface-finish is secured.

Diesel Engine Fuel Injector Cylinder "So accurate that a piston can be fit within .00005 inch."

Aircraft Valve Tappet Roller. 4-Micro finish.

Hardened Steel Inner Bearing Race honed to .00005" limit. Surface finish improved; errors of out-of-roundness eliminated.

Drill Jig Bushing "Increases sales appeal of product."

SUNNEN

Write for FREE BULLETIN

giving complete information or, if you prefer, a Sales Engineer will be glad to call with his demonstrator and show you what this machine can do on your job.

SUNNEN PRODUCTS CO., 7942 Manchester Ave., St. Louis, Mo.

Canadian Factory: Chatham, Ontario

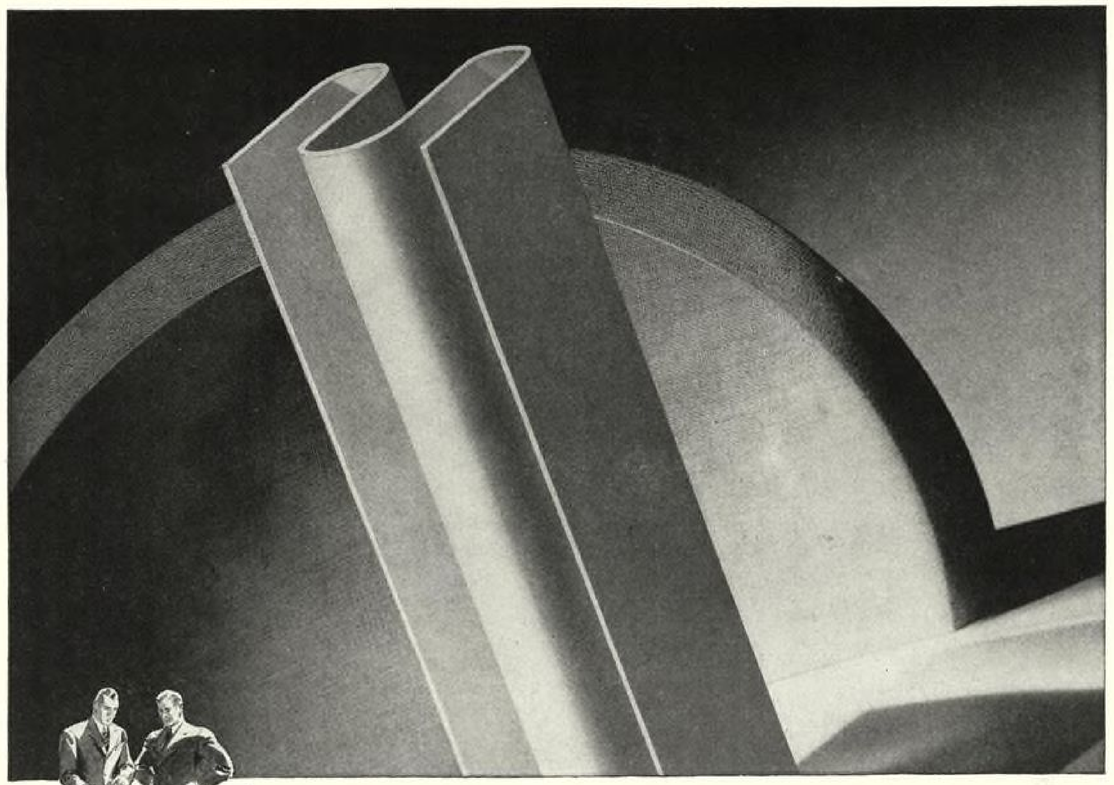

Here's something else that "Couldn't be done"

WITHOUT fuss or fury, many limitations have been overcome in the manufacture and use of plastics. Molded INSUROK parts, for example, are being produced in large quantities for war uses so important that they cannot be mentioned. And now Laminated INSUROK is being formed into "accordion pleats" and other shapes to solve another category of production problems.

In addition to extending the ways in which INSUROK can serve the armed forces, *Richardson Plasticians* are helping designers take full advantage of this versatile material, are helping many manufacturers increase their output per machine-hour.

If you have a problem which molded or laminated plastics might solve, write us. We'll be glad to furnish the details and characteristics of INSUROK Precision Plastics — or give you the benefit of our experience.

The Richardson Company, Melrose Park, Illinois; Lockland, Ohio; New Brunswick, New Jersey; Indianapolis, Indiana. Sales Offices: 75 West Street, New York City; G. M. Building, Detroit, Michigan.

INSUROK *and the experience of Richardson Plasticians are helping war products producers by:*

1. Increasing output per machine-hour.
2. Shortening time from blueprint to production.
3. Facilitating sub-contracting.
4. Saving other critical materials for other important jobs.
5. Providing greater latitude for designers.
6. Doing things that "can't be done."
7. Aiding in improved machine and product performance.

INSUROK

MADE AND SOLD ONLY BY THE RICHARDSON COMPANY

gain hours

Use Laminum shims to reduce parts machining for easier work tolerances in factory adjustment! More machine hours released for production.

Laminum shims (.003 or .002 inch precision laminations bonded into a solid unit) are cut to your specifications.

Stock shim materials obtainable from mill supply distributors. (Write us for sample and illustrated shim application chart.)

Laminated Shim Company
Incorporated
80 Union Street — Glenbrook, Conn.

it's
LAMINUM
TRADE MARK
THE SOLID SHIM THAT *peels* FOR ADJUSTMENT

Cushion-Bonded Clamps. 49

Cushioned and integrally bonded clamps meeting AAF specifications are being produced by **Automotive Rubber Co.**, Department A, 8601 Epworth Blvd., Detroit. Bonding is provided by using bonding strip attached to clamp securely by spot welding. Neoprene-

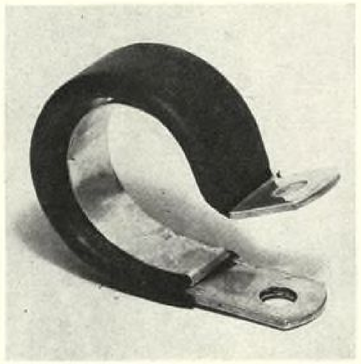

cushioned clamps use specially compounded Neoprene permitting minimum material with maximum cushioning through wide temperature range. Clamps may also be supplied with felt, leather, or plastic cushions.—AVIATION, *December,* 1942.

Exploding-Rivet Gun 50

Manufacture of new electric heating gun for exploding rivets in hard-to-reach parts of planes is announced by **Westinghouse Electric Appliance Division**, East Pittsburgh. Heat shot by tool into special duPont rivet sets off charge within 2 to 6 sec. Principal

parts of unit are modifications of key parts of electric ranges and household irons made in peacetime. Operator selects temperature needed depending on size of rivets, and gun's firing time can be controlled to gain full force of explosion.—AVIATION, *December,* 1942.

New Products

Skin-Assembly Gun 51

For assembling skin holders to aircraft sheets, **Prestole Division, Detroit Harvester Co.**, Toledo, has produced Prestite Safety Champ gun. Light weight and balance of unit minimize fatigue, says company, making it es-

pecially suitable for women workers, and automatic gun-type grip provides greater leverage. Feature is use of steel-hardened, replaceable clips in muzzle. Gun accommodates all popular sizes of skin holders.—AVIATION, *December,* 1942.

Aircraft Varnish 52

V-116 aircraft varnish has been developed by the **Wilbur & Williams Co.**, Park Square Bldg., Boston, to meet Army-Navy specifications AN-TT-V-116 for varnish for use primarily on wooden surfaces, such as plywood used in plane production. Specification for varnish preventing raising of grain of plywood and which will not check or peel is stated to be met to letter by V-116.—AVIATION, *December,* 1942.

Hydraulic Valve 53

Designed to permit installation of multiple hydraulic controls in limited space, such as cockpit control panels, without material weight increase, is new Stacking Midget valve announced by **Adel Precision Products Corp.**, Bur-

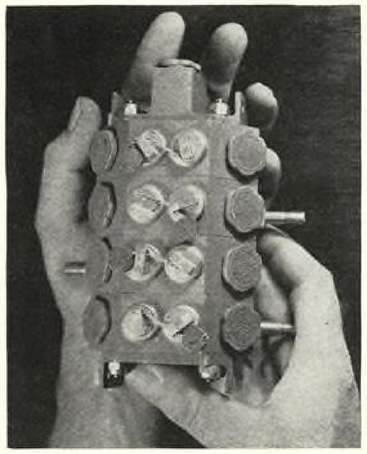

bank, Calif. Companion to previously announced Mighty Midget four-way selector valve, new stacking valve measures 5 31/32 x 2 7/8 x 3 7/8 in. and weighs 2.9 lb. Individual valve assemblies may be replaced or repaired by breaking only two cylinder lines affected. Fitting as single body, any number of units may be clamped together by means of "through" bolts and end plates which also serve as flanges, and symmetrical design permits turning end-for-end to meet desired shaft arrangements. Over-travel is prevented by integral stop located on cam shaft. Complete interchangeability of valves and assemblies assures maintenance ease and reduces parts stock requirements.—AVIATION, *December,* 1942.

Line and Cable Grommet . . . 54

Fume and watertight support for air, oil, and hydraulic lines, electrical cables, flexible remote control casings, etc., is enabled with Dura-Grom grommet, according to **Arens Controls, Inc.**, 2253 S. Halstead St., Chicago, maker. Unit, consisting of oil-resisting synthetic rubber disks and cadmium plated steel cup retainer, slips over line, cable, or tube and fits snugly against wall. Multiple lines may be supported by single grommet, with individual opening provided in disks for each line.—AVIATION, *December,* 1942.



Where Women are Employed In Industry

Reduce Fatigue... Make Lifting Easy WITH CURTIS AIR HOISTS

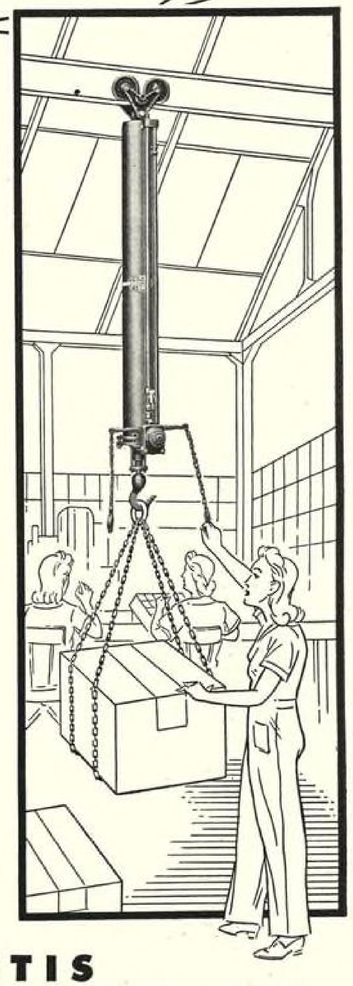

If you are considering employing more women in your plant, you can convert most manual lifting operations, make tough jobs easy, and speed up your output with Curtis Air Powered Hoists.

Many heavy lifting jobs, formerly requiring male labor, may now be accomplished quickly and easily by women, using Curtis equipment.

Curtis Air Hoists provide these important advantages:

- Smooth, fast, accurate control of loads
- Low first cost — lowest operating expense
- Light weight — pendant, bracketed, or rope compounded types
- Immunity to abuse or overloads
- One-man or woman operation—finger-tip control
- Do not require skilled labor

Hundreds of war production plants have increased production efficiency, reduced worker fatigue, saved thousands of man-hours by solving many material hoisting problems with Curtis equipment. Write for full information and free booklet, "How Air Power Is Being Used in Your Industry."

CURTIS
ST. LOUIS • NEW YORK • CHICAGO • SAN FRANCISCO • PORTLAND

CURTIS PNEUMATIC MACHINERY DIVISION of Curtis Manufacturing Company
1957 Kienlen Avenue, St. Louis, Missouri

● Please send me your free booklet, "How Air Is Being Used in Your Industry," and further details concerning Curtis Air Hoists.

Name.....
Firm.....
Address.....
City.....State.....

High Altitude
TEST AND CALIBRATION CHAMBERS

DESIGNED TO SATISFY ARMY & NAVY REQUIREMENTS

POSITIVE AUTOMATIC MECHANICAL MEANS PROVIDE:

- ★ LOW TEMPERATURES TO – 100 F°
- ★ HIGH TEMPERATURE + 158° F
- ★ TEMPERATURES AUTOMATICALLY HELD WITHIN ±2° F. OF SELECTED SETTING.
- ★ ALTITUDES TO OVER 80,000 FT.
- ★ INTERNAL PRESSURES TO 30 lbs./ sq. inch.
- ★ RATE OF CLIMB TO 10,000 Ft./Min.
- ★ HUMIDITIES AUTOMATIC OR MANUAL CONTROL

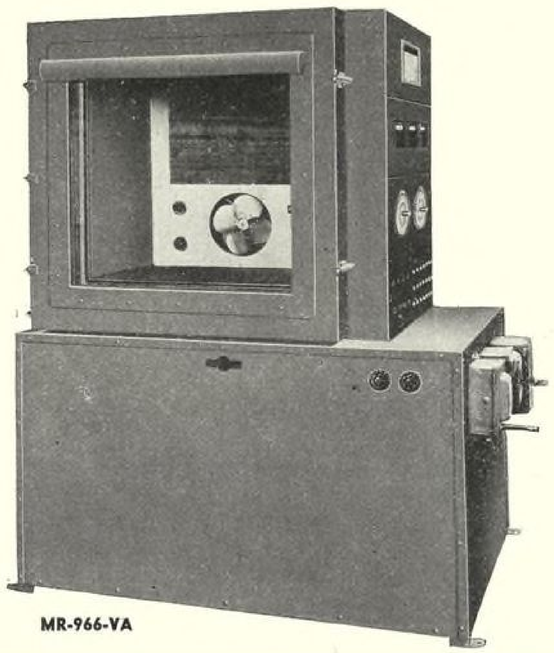

MR-966-VA

★ Standard Models are available in two sizes of clear visible test space:

MR 966 VA — 24 in. high by 24 in. wide by 16" front to back.

MR 965 VA — 12 in. high by 12 in. wide by 12" front to back.

Temperature Ranges for standard models are from + 158° Fahr. to — 40° F, — 76° F, or — 100° F.

★ *Engineering department will gladly cooperate with you on any high altitude test or calibration problem or on special size or purpose chambers.*

MOBILE REFRIGERATION INC.
630 FIFTH AVENUE NEW YORK, N. Y.

Riveter Time-Cycle Unit

New Murray Time-Air, of which manufacturing and selling rights have been acquired by **Chicago Pneumatic Tool Co.**, 8 E. 44th St., New York, is device for mechanical determination of proper riveting time cycle. Developed by Murray Research Division, it is light, compact, precision unit which

when attached to handle of portable riveting gun can be controlled by operator either automatically or manually. After full depression of trigger in automatic operation, timer delivers predetermined time cycle, then stops. By pulling trigger slightly back, hammer operates as long as trigger is so held, permitting trim-up or occasional longer cycle. Time cycles are set by small adjustment dial, and pressure control may be regulated for thin or soft material. Device may also be used on pedestal riveters with foot-pedal control.—AVIATION, *December,* 1942.

New Power Package 56

Power package offered by **General Electric Co.**, Schenectady, is designed to combine, in one unit, motor, brake, clutch and limit switch, as well as indicators, gears, and whatever else is required. Designed for 24-hour service and obtainable in ratings from about 1/100 hp. to 3 hp., units are applicable for bomb-door operation, landing gear and wing flap operation, and actuating of control and protective devices. New planetary gear system permits use of magnetic brake for some applications. Brake is of quick-acting friction type, stopping motor instantly to prevent overtravel and consequent jamming of driven plane assembly.—AVIATION, *December,* 1942.



New Products

Fluorescent Lights 57

R & W Wiley, Inc., 777 Hertel Ave., Buffalo, has developed fluorescent lighting fixtures employing a new method of ballasting said to give positive and in-

Those curves look awfully good!

"Good," is right! 1500% increase in production since the War began is the latest report—bringing within easy sight the plane quotas set for 1942 and 1943.

That certainly is something to cheer about!

To the men and women of the airplane industry goes the applause and hearty thanks of every American. And, in turn, every plane plant executive and engineer gives thanks to the other American industries that are steadily supplying reliable materials with which to do the work.

With an ever-increasing demand as a token of quality and value, Valspar Val-Aero Aircraft Finishes are proud to have won a place among those "reliable materials with which to do the work."

VALSPAR

VAL-AERO

A complete line of dependable Aircraft Finishes —that meet government specifications.

Valentine & Company, Inc., 11 East 36th Street, New York, N.Y.
Established 1832 • Makers of the Famous Valspar Finishes

stataneous starting so that lights come on fully at the turn of the switch as in incandescent lighting. Other features are said to include positive starting at lower atmospheric temperatures and lower voltage, no radio interference and satisfactory tube life. Available in types for all applications, continuous or separate units, close-to-ceiling or suspended mounting, open reflector or louvred models.—AVIATION, *December,* 1942.

Tensile Strength Testers 58

Model B tensile testers, developed by **W. B. Dillon & Co.**, 5410 W. Harrison St., Chicago, are offered in portable table and floor units. Though

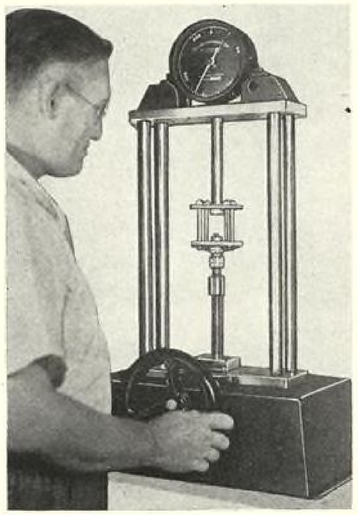

small in size, table model will physically check specimens up to foot in length, accommodate up to 9 in. width, and handle up to 10,000 lb. With provision of grips, special tests such as separational pull of sockets (photo shows test of aircraft socket) can be made. Dynamometer stress indicator permits wide limits of measurement with uniformly small stress-reader. Height starts at 32 in. (table model) to 78 in. (floor type).—AVIATION, *December,* 1942.

Portable F-I Pump 59

Latest in line of "Pile Drivers" made by **Lincoln Engineering Co.**, 5701 Natural Bridge Ave., St. Louis, is "50" Series portable forced-induction pump. Unit, states company, will pump sealing compounds, sound deadeners, insulating material, heavy lubricant, etc., directly from original container to point of application. Portability of pump is feature.—AVIATION, *December,* 1942.

New Products

Torque Wrenches 60

Creation of complete line of torque wrenches affording wide range of application is announced by **P. A. Sturtevant Co.**, Addison, Ill. Tools are designed for assembly and inspection gaging of torque applied when tightening critical screws and bolts and to equalize, control, or bring screws to predetermined torque. Eight models range in size and capacity from small instrument-building wrenches of very low inch-pound capacity to two-handled torque wrenches of 7,200-inch-pound capacity. All are of flat, tapered-beam type with fixed end and top scales.—AVIATION, *December,* 1942.

Hydraulic Test Bench 61

Portable hydraulic test bench for pre-flight checking of hydraulic circuit of planes has been brought out by **Hydraulic Machinery, Inc.**, 10421 Grand River, Detroit. Testing includes putting planes through all hydraulic functions without running engine. Equipment consists of hydraulically operated air compressors (high or low pressure) for purpose of charging hydraulic accumulators. Can also be used

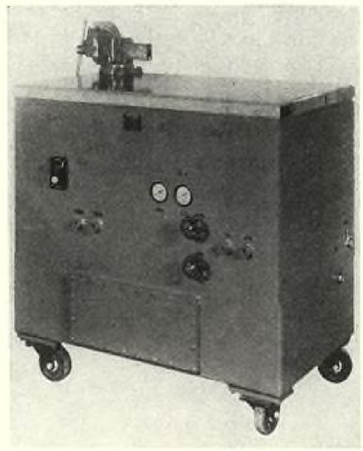

to pump hydraulic fluids in and out of planes, and variable-displacement pump permits unit to operate hydraulic circuit at different speeds. There is adjustable pressure range of 0 to 1,000 lb. per sq. in.—AVIATION, *December,* 1942.

Penco WOOD STORAGE EQUIPMENT

Aids Your War Production these ways . . .

☆

SHELVING

- Provides for controlled handling and storage of tools, parts and assemblies.
- Simplifies storekeeping.
- Reduces losses and breakage.
- Saves floor space — allowing *extra* room for *productive* purposes.

☆

LOCKERS

- Help maintain employee morale.
- Provide for safe, sanitary storage of clothing and personal effects.
- Help promote orderly "factory-keeping."

☆

CABINETS
Tool and Storage

- Time-saving and convenient machine tool accessories.
- Efficient storage for tools, parts, gauges, instruments, supplies.

ENGINEERED CONSTRUCTION— STANDARD STYLES AND SIZES

As the conservation substitutes for Penco Steel Equipment, Penco Wood Lockers, Shelving and Cabinets will meet your current needs for adequate storage and materials handling facilities. Write today for full information and prices.

1869 Penco

Penn Metal Corporation of Penna.
In Business Continuously Since 1869
32 Oregon Avenue, Philadelphia, Pa.

TAKE THIS 3-MINUTE TOUR...

Come with us and see for yourself why Gardner-Denver "HA" Horizontal Two-Stage Air Compressors are helping to speed all-out production.

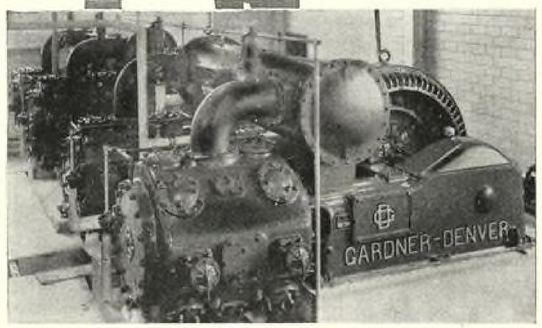

GREATER AIR CAPACITY—Famous for heavy-duty, continuous performance, Gardner-Denver "HA" compressors are supplying many a war plant with an abundance of dependable air. They're built in capacities from 316 to 2012 cu. ft. displacement per min.

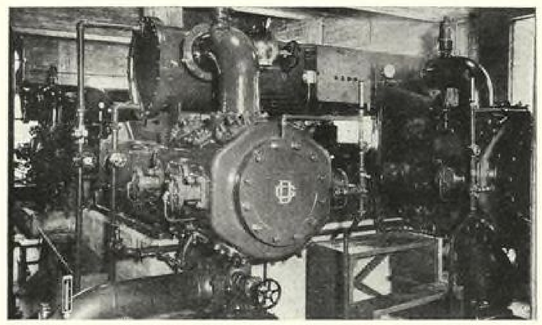

AUTOMATIC CONTROL—There is no wasted power in operating an "HA" compressor, for the air capacity is under constant, automatic control—and the air supply is constantly regulated to fit your air needs.

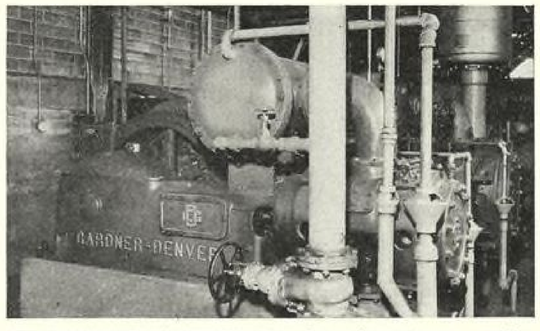

LOW HORSEPOWER REQUIREMENTS—Operating costs are surprisingly low, for these compressors have been designed for unusually low horsepower requirements. Liberal and unrestricted valve and port areas contribute to their *extra* efficiency.

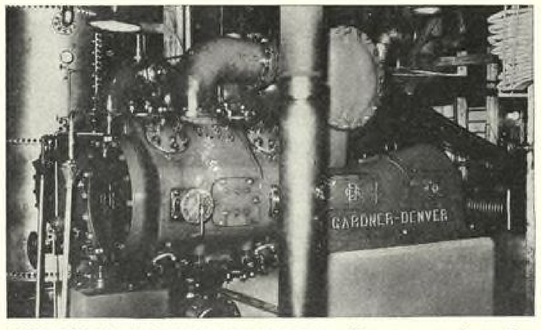

REMARKABLE MAINTENANCE RECORDS—User reports show that "HA" compressors consistently set remarkable records for low maintenance. One operator reports the "Air-Cushioned" valves have required only routine cleaning during 8 years of constant service.

Here are a few suggestions on air compressor care and maintenance: **1.** Keep crankcase filled—change oil every 2 to 4 months. **2.** Use only best grade of air compressor oil in cylinders. **3.** Clean intake air filter at least once a week. **4.** Test safety valves daily to prevent sticking. **5.** Periodically inspect compressor valves—clean if necessary. **6.** Clean automatic water traps frequently, to make certain they are operating.

GARDNER-DENVER PRODUCTS HELP SPEED VICTORY

For further information, write Gardner-Denver Company, Quincy, Illinois

GARDNER-DENVER *Since 1859*

HARDWICK, HINDLE

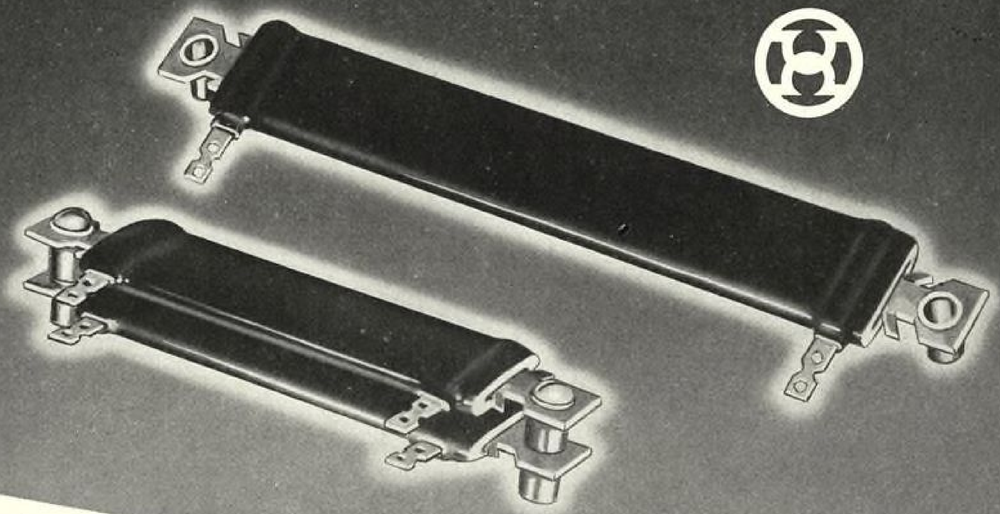

BLUE RIBBON RESISTORS

PATENT PENDING

The immediate acceptance and widespread use of our Blue Ribbon Resistors exceeded our expectations. Designed on modern lines, compact, efficient and tough,—they offer more than just higher wattage ratings for unit space required.

The resistance wire is accurately wound on a Steatite core and the ends are brazed to terminals of any of our numerous types. Standard mounting is by means of an aluminum thru-bar which is in contact with the entire internal surface of the ceramic core. This thru-bar distributes heat uniformly along its entire length,—eliminating hot spots normally found in tubular resistors with conventional mountings.

Our mounting studs are riveted to the ends of the thru-bar, and tend to conduct heat to the mounting surface—they are designed also as spacers when two or more units are stacked. This resistor and its mounting form an integral unit. Blue Ribbon Resistors cannot rotate or loosen. They are easily mounted in a minimum of space. They are the last word in ceramic core-vitreous enamel construction and design.

Intermediate taps, adjustable contact bands, non-inductive winding, non-standard lengths and ratings.

There are important exclusive advantages in other types of resistors and rheostats made by us. Please consult us.

HARDWICK, HINDLE, Inc.,
Newark, N. J., U. S. A.

ON LAND, SEA AND AIR

FOR STRATOSPHERE OR STRAFING

—they need AMERIPOL* Hydraulic Seals

For the intense cold of high-altitude bombing and fighting—

For low-flying attacks over the desert's burning sands—

Ameripol Synthetic Rubber is the material for Hydraulic Seals that must operate under extreme temperature conditions, hot or cold.

At fifty below they must not check, crack or break, even if bent double—and they don't. At roasting heat they must retain flexibility, life and strength, even in the presence of oil—and they do. For Ameripol is oil resistant (max. swell 6%), heat resistant, long-lived, molded to close tolerances, non-corrosive to metals.

These and other properties that make Ameripol ideal for V-Type, O-Ring, U-Cup packings and seals, for diaphragms and many more hydraulic uses, are fully explained in bulletin giving complete technical data. Write for it, today. *Miller Rubber Industrial Products Division, The B. F. Goodrich Company, Akron, Ohio.*

*Registered trade mark of The B.F. Goodrich Company

Miller Rubber
Industrial Products Division
B.F.Goodrich
FIRST IN RUBBER

Spacing Collar Wrench 62

Illustrated spacing collar adjusting wrench, a double end pin spanner tool, is now furnished with eleven different sizes of micrometer adjustable spacing collars for milling machine cutter ar-

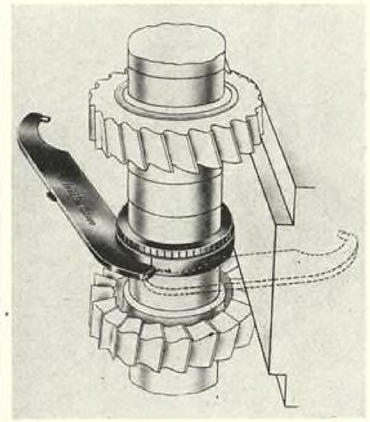

bors offered by **Dayton Rogers Mfg. Co.**, 2835 Twelfth Ave. S., Minneapolis. Wrench permits micrometer adjustment of collar governed by micrometer sleeve.—AVIATION, *December*, 1942.

Light Weight Drill 63

New Size OOA pneumatic drill, weighing less than 2 lb., has been introduced by **Ingersoll-Rand Co.**, 11 Broadway, New York. Powered by efficient air motor, light weight drill is sturdily built for three-shift endurance in making of aircraft. Reported features: Built-in speed regulator for desired performance setting, split second travel action for quick and accurate hole starting, lubrication by built-in automatic oiler, and protective chuck shield, which may be grasped by free hand for more effective guiding of drill.—AVIATION, *December*, 1942.

Airfoil Demonstrator 64

Kahlow Flight Demonstrator is 10-lb. boxed device for use in pre-flight and ground school instruction. Comprises miniature wind tunnel with actuated wing section which illustrates lift, drag, changes of pressure, stall, and characteristics of ailerons and flaps in flight. Agent for device is **Gordon Laughead**, Story & Clark Piano Co., Grand Haven, Mich.—AVIATION, *December*, 1942.

Wood-Fiber Material 65

Fybr-Tech, product of **Technical Ply-Woods**, 228 N. LaSalle St., Chicago, is

New Products

offered for use by plane makers for construction of bulkheads, partitions, floors, table covers, conduit covers, etc. Consisting of veneer or plywood core with sheets of vulcanized fiber resin bonded to each face, material is reported to have unusual strength and lightness. Of tough, hornlike surface, non-slipping and resistant to cuts and scratches, it can, states the maker, be sawed, drilled, die-punched, and readily bent, taking sharp radii with ease. It is stated to take all types of finishes, air dried and low-baked synthetic enamels reflecting an even, smooth finish.—AVIATION, *December*, 1942.

Spot Weld Tester 66

To check strength of spot welded sample, testing machine shown has been developed by the **Baldwin Southwark Division** of the **Baldwin Locomotive Works**, Philadelphia. Self contained and motor driven, hydraulic machine is equipped with self-aligning, lever-operated, open-faced grip which accommodates offset in welded specimen from the smallest gage to ¼-in.

(*Turn to page* 215)

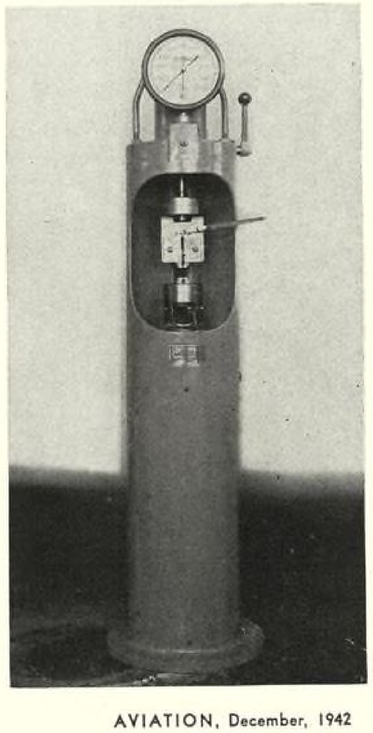

THE MOST IMPORTANT WORK ON THE WARRING WORLD'S AVIATION AVAILABLE TODAY!

THIRD ANNUAL EDITION

AEROSPHERE·1942

PRESENTS THE WHOLE WORLD'S AERONAUTICS

U. S. Navy photo

You Receive All 5 Sections in One Volume

2 Extras well worth having!
A NEW SECTION ON *AIRCRAFT ARMAMENT
AND ARTICLES ON THE U. S. WAR EFFORT

1 **MODERN AIRCRAFT.** The indispensably best coverage possible! 362 pages of planes of 19 world's powers. 655 informative photographs and drawings. Complete description of design, construction, equipment, performance . . . military, private, commercial.

2 **AIRCRAFT ARMAMENT.*** A new section. Guns and armor plate carried by the world's modern battle planes. All available released material. Machine gunnery, cannon, shells...for protection of our fighting men and destruction of the enemy.

3 **MODERN AIRCRAFT ENGINES.** 128 pages of the world's plane powerplants, 399 models, 199 photographs and drawings. The Power that makes War. *The Power that will win for the United Nations!*

4 **AVIATION STATISTICS.** More complete than ever. What you want to know when you want to know it . . . under innumerable classifications . . . altitude records, races, associations, commerce, government bureaus, and many others.

5 **BUYER'S GUIDE.** Vital roster of manufacturers and suppliers to expedite the War Effort! Whole world's aviation firms *alphabetically* (with addresses and personnel), by *products*, and (the U. S.) *geographically*. Useful to buyer and seller and as a vocational guide. 3,559 U. S. firms making 4,718 products listed.

In his foreword to AEROSPHERE • 1942 Lieutenant General Henry H. Arnold, Commanding General of the Army Air Forces, says, "Air power is the keynote to Victory." AEROSPHERE • 1942, reflecting the big job before us, is

DEDICATED TO THE UNITED STATES WAR EFFORT

Added to the vital, daily-useful materials described above are features like AIR POWER IN ACTION by CY CALDWELL, a significant survey of aviation in this war; the part played by the Soviet is described by LUCIEN ZACHAROFF in THE MEANING OF SOVIET AVIATION; the work of all departments of the U. S. offensive is set forth by the top officers of the Army, Navy and Marine Corps. Training and supply are emphasized.

AEROSPHERE • 1942 pictures and describes all the planes fighting in this *GLOBAL WAR*. AEROSPHERE • 1942 is recognized and accepted everywhere as the

STANDARD INTERNATIONAL AERONAUTICAL AUTHORITY

Every American citizen owes it to himself and to his country to keep himself informed about our most vital WAR WEAPON and medium of transportation. Everything in Aeronautics is here! YOU NEED AEROSPHERE • 1942!

NOW READY . . . and *better than ever!*

A regrettable delay in our publication date was caused by many circumstances—25% more pages and more difficulties in securing material from all parts of the world due to war conditions being the important ones. However,
AEROSPHERE • 1942
is now ready and *better than ever.*

ORDER TODAY!

Order Today!

Clip the coupon and mail now!

Only $12.50 *plus shipping.*

1156 8½"x11½" pages.
Blue Buckram Binding.

AIRCRAFT PUBLICATIONS, 370 Lexington Ave., New York, N. Y.

Gentlemen: Check is attached for The New AEROSPHERE•1942 in quantity indicated. PLEASE RUSH!

10 copies ☐ 5 copies ☐ 1 copy ☐ *Send descriptive literature* ☐

Name .....

Address ..... State .....

City .....

Ideal Christmas Gift for your employees and friends and relatives entering the services.

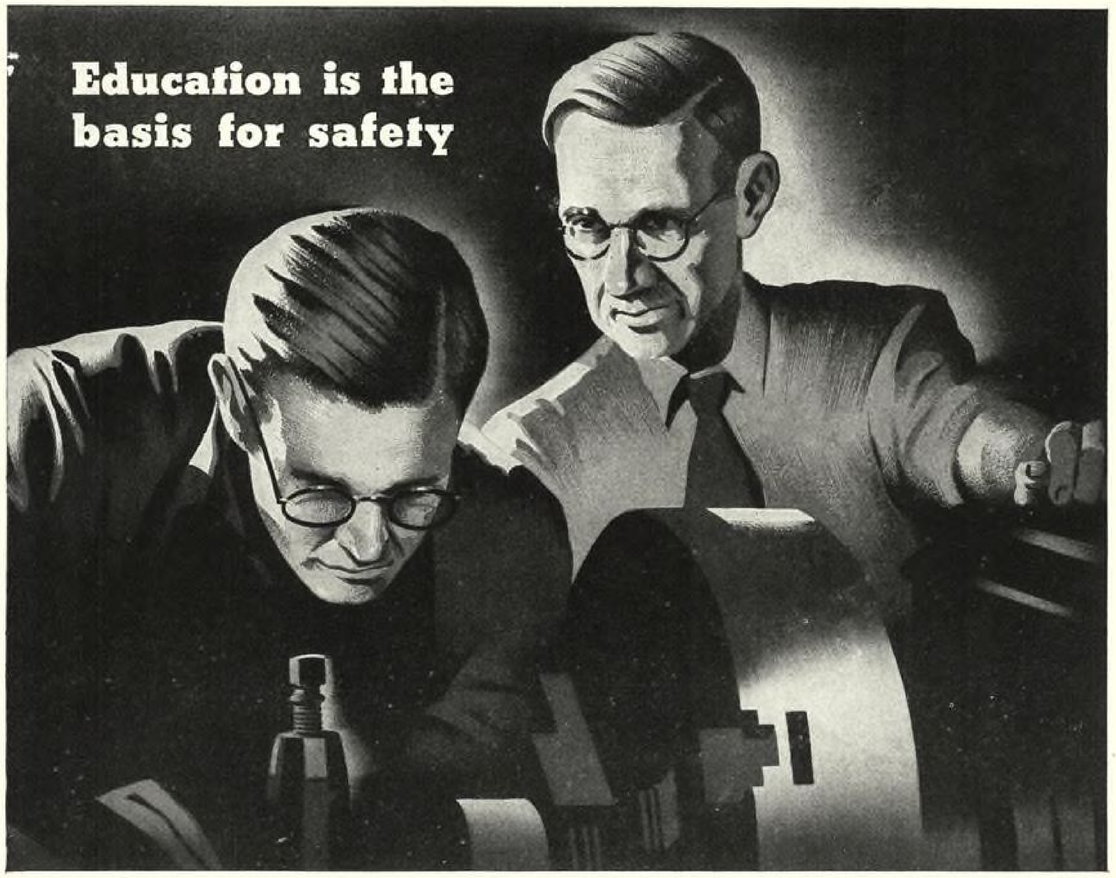

Information supplied by the National Safety Council

Labor, particularly inexperienced labor, cannot be expected to recognize the full penalties of carelessness in the shop. Management has assumed the responsibility of supervising safety measures, and has cooperated in establishing sound safety rules.

Nevertheless, the large increase in labor personnel due to war needs, plus the influx of inexperienced men, have resulted in a substantial increase in lost time accidents.

Even assuming that the obvious safety measures with regard to operating machinery, electrical equipment and shop traffic have been installed, two factors — education and eternal vigilance — determine the real effectiveness of any safety program.

Both are the responsibility of the supervisory staff, from foremen up. The foreman who does a thorough job of educating his particular group in safety rules and cooperative enforcement has done much to cut down accidents. Management that takes an active interest in both safety education and the enforcement of safety measures has taken a great step forward in reducing wastage of irreplaceable production time.

CLIMAX FURNISHES AUTHORITATIVE ENGINEERING DATA ON MOLYBDENUM APPLICATIONS.
MOLYBDIC OXIDE—BRIQUETTED OR CANNED • FERROMOLYBDENUM • "CALCIUM MOLYBDATE"

Climax Mo-lyb-den-um Company
500 Fifth Avenue • New York City

MOLY

New Products

thickness. No backing plates or liners are needed. Load is indicated by 8-in. precision dial. Cylinders, with 2-in. stroke, are set in top section. Unit has over-all height of 70 in. and total weight of approximately 800 lb.—AVIATION, *December*, 1942.

Pilot's Seat 67

New pilot's seat for military aircraft combining several non-strategic materials is announced by **Harvill Corporation**, Los Angeles. Only metal parts are mounting brackets, shoulder harness, and adjusting fittings. Plastic-impregnated fabric is used with special wood structures to produce seat

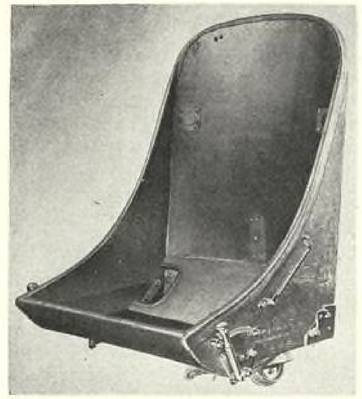

which is light, yet meeting all strength specifications. One basic type meets AN-7505 specifications for pursuit and training planes, another AN-S-1 requirements for long-range bombers. As no heat or pressure is used in fabrication, field repairs are simplified.—AVIATION, *December*, 1942.

Powder-Metal Parts 68

Latest development of **Bound Brook Oil-Less Bearing Co.**, Bound Brook, N. J., is Powdiron, powder metallurgy product made into parts and bearings to meet war demand for savings on material and to eliminate need for machining. There are three distinct formulae of Powdiron, with specifications providing porous iron alloys containing no tin and copper from 0 to 10 percent maximum, and it is adaptable to a wide variety of conditions and applications. Can be had either with or

You Want the Efficiency of Kinnear Steel Rolling Doors

YOU CAN GET IT -- IN WOOD!

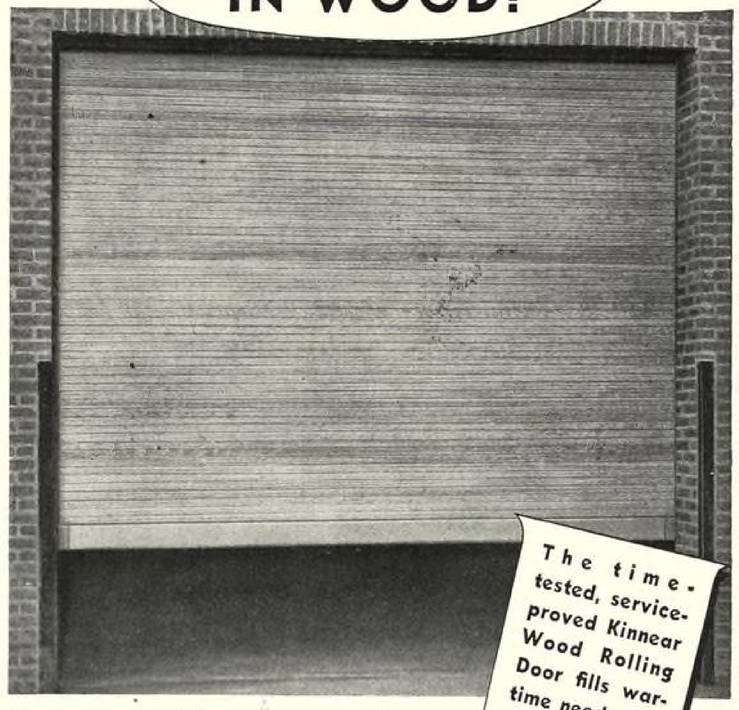

The time-tested, service-proved Kinnear Wood Rolling Door fills wartime needs, but saves critical materials.

You can get the efficient, space-saving *coiling upward action* of Kinnear Steel Rolling Doors in spite of wartime contingencies—in Kinnear Wood Rolling Doors. Their durability and service has been thoroughly proved on numerous installations for many years!

Constructed of inter-lapped wood slats jointed with metal cables or tapes, they coil above the opening, remain out of the way and out of reach of damage, require no usable floor, wall or ceiling space for either storage or operation. The rugged curtain assembly offers a high degree of protection, and blocks out wind and weather. Kinnear Wood Rolling Doors are available in any size, with motor, manual or mechanical operation. Write for bulletin 37, containing complete details.



ANOTHER KINNEAR WOOD DOOR FOR TODAY'S NEEDS

KINNEAR BIFOLD consists of two horizontally hinged sections. Pivoted at top corners; lower corners travel on ball-bearing rollers in metal jamb guides. Folds to overhead position. Available with any number of sash, and spring-counterbalanced for smooth, easy action. Any practical size; quick, economical installation. Write for details.

THE KINNEAR MFG. CO.
1440-60 Fields Ave. Columbus, Ohio

SAVING WAYS IN DOORWAYS

KINNEAR ROLLING DOORS

without lubricant impregnation, with up to 25 percent oil content.—AVIATION, *December*, 1942.

Screw Machine Tool 69

Known as Model B, screw machine tool now marketed by **Boyar-Schultz Corp.**, 2110 Walnut St., Chicago, is designed to take heavy cuts with sus-

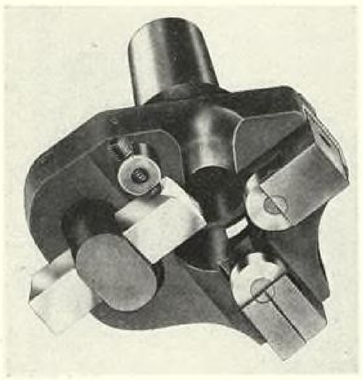

tained accuracy. It has swiveling tool bit and separately adjusted rollers for easy adjustment. There is generous space for chips and coolant.—AVIATION, *December*, 1942.

Plywood Lock-Nut 70

Self-locking speed nut for plywood assemblies is offered by **Tinnerman Products, Inc.**, 20-70 Fulton Rd., Cleveland. With two pair of integrally formed attaching legs, it is designed for instant driving into anchored position. Lightness is feature, nuts weighing only 3½ lb. per 1,000, and large bearing surface is stated to spread load over greater area. Nuts



are made for use on both Air Corps 530-8 and Air Corps 530-10 standard type "Z" sheet metal screws.—AVIATION, *December*, 1942.

Quick Action Vise 71

Pacific Vise Co., 6331 Hollywood Blvd., Los Angeles, Calif., has developed a quick action vise using a patented nut and pawl which makes it possible to open and shut the vise like a drawer and lock it in any desired position with but two turns of the handle. All working parts are of steel, precision machined, fully enclosed and all parts are interchangeable. A new-type swivel base locking bar with two screws assures positive lock in any position and equalizes strain. Available in 4½, 6 and 7-in. sizes with both swivel and solid base types.—AVIATION, *December*, 1942.

Non-Magnetic Bearings 72

NM4 and NM5-radial and NM3P-pivot bearings are non-magnetic series bearings now offered by **Miniature Precision Bearings**, Keene, N. H. Series has races and balls manufactured of Beryleo No. 25, beryllium copper alloy hardened after machining by heat treatment to approximately 40 Rockwell. Dimensions and tolerances are identical with SAE 52100 chrome-steel bearings marketed by firm.—AVIATION, *December*, 1942.

Air-Ground Phone Unit 73

Introduced by **American Radio Hardware Co.**, 476 Broadway, New York, SM-141 phone switch is offered as a connecting-link unit between air



and ground communications. It is a double circuit microphone switch designed for easy use by operator wearing heavy mittens. Remaining normally in open position, it can be locked into closed position. Switch is 4$\frac{13}{32}$ in. overall, ⅜ in. thick, and 1¾ in. wide. Integral parts of housing include cordage clamps to take up cable strain.—AVIATION, *December*, 1942.

Electrical Cable 74

Announcement comes of new series of Auto-Lite Sterling low tension aircraft electrical cable known as "B" Braid Synthetic. Approved under Army-Navy Specification AN-JC-48 in sizes from 22 GA. to 00 GA., cable is made by Wire Division of the **Electric Auto-Lite Co.**, Port Huron, Mich. Flame-resistant insulating compound used on cables is synthetic, protected

New Products

by special cotton braid, with newly developed lacquer with high abrasion resistance. Cable is small in size and low in weight.—AVIATION, *December*, 1942.

Angle Drilling Heads 75

Specially applicable to aircraft assembly, and for work in close quarters generally, are new Wyco angle drilling heads for use on flexible shaft or flexible shaft extensions of portable electric drills. Designated as "Junior" size, they come with 90 deg., 45 deg., 30 deg., or universal heads and have over-all diameters of ½ or ¾ in. Maker is **Wyzenbeek & Staff, Inc.**, 836 W. Hubbard St., Chicago.—AVIATION, *December*, 1942.

Thiokol-Made Gaskets 76

Development of non-critical materials for certain gasket and stripping requirements is announced by **Felt Products Mfg. Co.**, 1530 Carroll Ave., Chicago. Fel-Pro Thiokol strip material, with spongy effect of rubber is weather resistant.—AVIATION, *December*, 1942.

New Gas Tank Cap 77

Aircraft gasoline tank cap assembly introduced by **Poulson & Nardon, Inc.**, Los Angeles, has brought savings in critical materials, and through stamping process many of former welding operations have been eliminated. In manufacture, sheet stock is drawn into tubular sections, and lugs for holding cap to tank portion of assembly are automatically formed during stamping operation.—AVIATION, *December*, 1942.

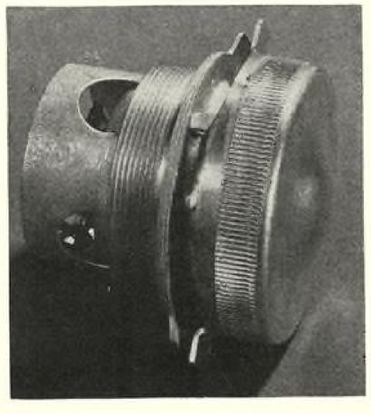

UNSEEN BUT *HEARD* FROM

The planes that dropped devastation on these Jap warships were unseen, but their *telling effect* was very much there!

Pesco Pumps and related aircraft accessories are not in open view on the plane but their *foremost performance* is very much there!

Pesco
Division of Borg-Warner
Cleveland, Ohio

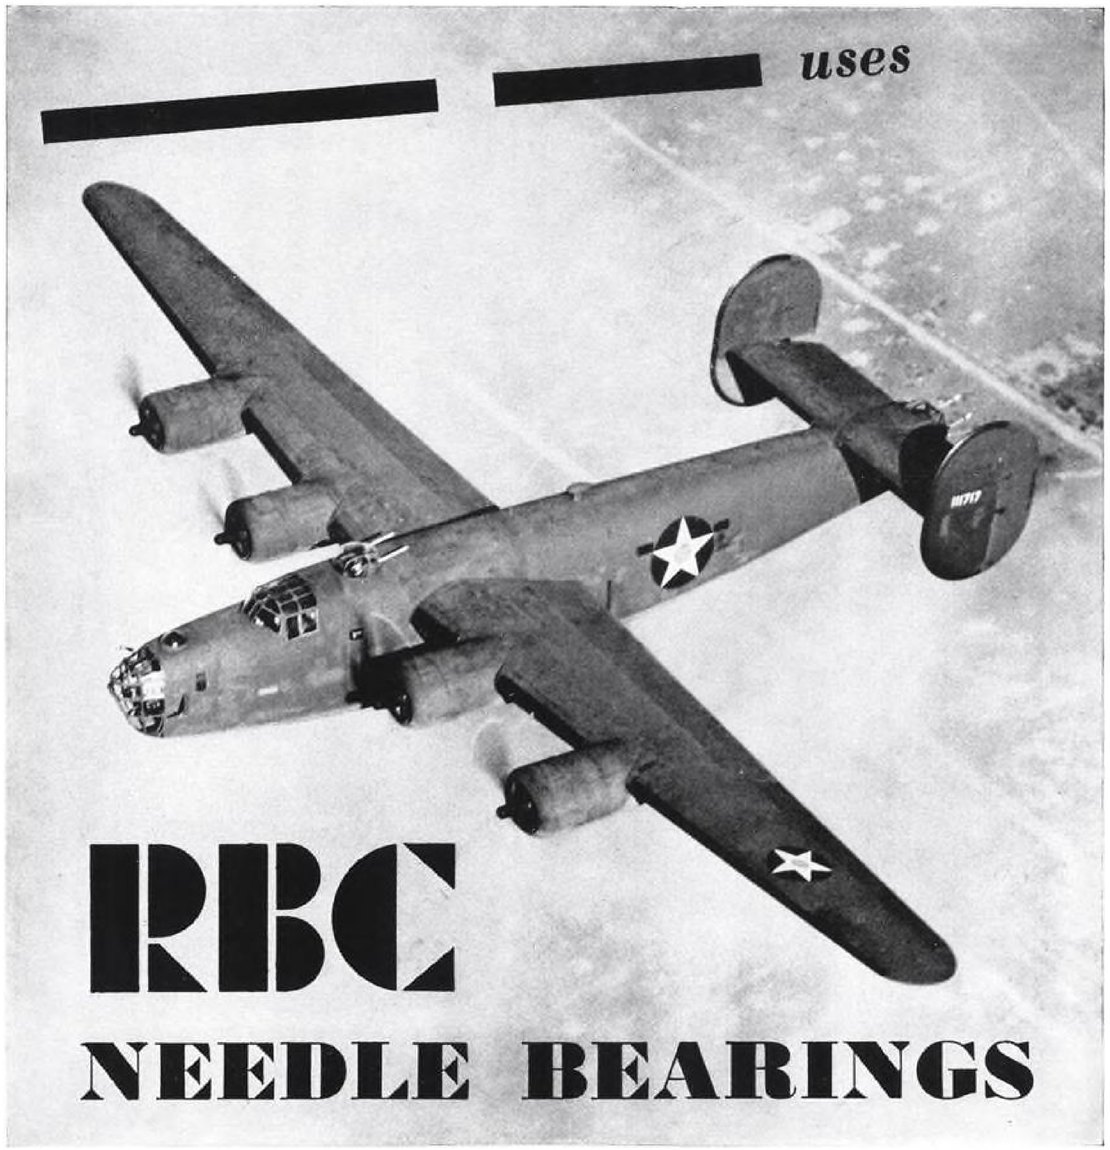

——— ——— uses RBC NEEDLE BEARINGS

Mission accomplished . . . headed for home and a happy landing! When they're flirting with death above the clouds, the pilot and crew have at least the right to expect that their ship can be set down smoothly and safely. That's why the landing gear of ——— ——— Bombers are equipped with RBC Aircraft Bearings.

ROLLER BEARING CO. of AMERICA
TRENTON . . . . NEW JERSEY

ELECTRIC DRILLS—capacities from ¼" to 1¼"—including the famous HOLGUN—with wide choice of spindle speeds and handle arrangements for every type of aircraft work.

POWER DRIVERS—sizes to drive anything from small screws to large nuts and bolts; clutch adjustments, angle heads and controls to drive all threaded-fastener assemblies.

LECTRO-SHEARS—speed up sheet metal cutting—either straight-line or intricate pattern work, down to minimum cutting radius of ¾". Cutting operation always visible. 2 sizes—18 and 16 gauge.

GET IN THE SCRAP WITH YOUR SCRAP

Where can you save MORE time with MORE Black & Decker Tools?

On aircraft parts, sub-assemblies and assemblies, on aircraft engines, equipment and armament, countless jobs are being done faster today—thanks to the advanced engineering and built-in quality of Black & Decker Portable Electric Tools.

A few of these tools are pictured here. Many more are shown in our new catalog. For a copy of the catalog—and as a dependable, convenient source of supply—phone your near-by Black & Decker Distributor. Or write to: The Black & Decker Mfg. Co., 738 Pennsylvania Avenue, Towson, Maryland.

LEADING DISTRIBUTORS EVERYWHERE SELL

Black & Decker

PORTABLE ELECTRIC **TOOLS**

ELECTRIC TAPPERS—for hole threading at high speed with less tap breakage. Capacities up to ⅜" in cast iron, ¼" in steel, ½" in brass or aluminum. Reverses automatically. Universal motor.

ABRASIVE TOOLS—Sanders, Portable Grinders and Bench Grinders—for smoothing, cleaning, buffing, wire brushing and sharpening operations. . . . on metal, wood or plastics. Vital parts sealed against dust.

Connecticut
SYNTHETIC RUBBER PARTS WITH SPECIAL PROPERTIES

THE PROBLEM PIECE of synthetic rubber that requires certain properties beyond AN or AMS standard specifications, is one of our specialties. We have handled many such assignments, in fact, a large part of our laboratory staff is constantly finding new ways to make synthetic rubber do things it never did before.

Each solution helps to meet the next problem—the accumulated knowledge is invaluable in this rapidly moving field. The answer to your problem may be already in our files.

We have the aviation industry's approach to development—chemical and engineering knowledge, a well equipped laboratory, and a willingness to try. Our production facilities also are geared to the quantity output of difficult pieces; with inspection and testing under strict control of the laboratory.

WE do not make stock parts—each job is custom made, each step from compounding to final inspection is engineered to meet the conditions of actual operation.

If you have a piece that calls for unusual properties or design, and if it is important enough to the war effort, we will find a way to fit it into our laboratory schedule.

★ The Connecticut Hard Rubber Company ★ NEW HAVEN, CONN., U.S.A.

Boosting Bomber Production By Subcontracting

Glenn L. Martin Company maintains corps of 40 expediters to work with parts and subassembly makers to speed flow of bombers to war fronts.

By T. J. DUNNION, *Director of Procurement, The Glenn L. Martin Company*

A FEW MONTHS AGO a company in Baltimore was making ice. Today it turns out small assemblies for the Martin 187, an attack bomber that has been giving Marshal Rommel plenty of trouble in Africa and over Malta.

Another concern in Indiana was making, of all things, curled hair. Today it makes seat cushions for the mighty Martin B-26—"the bomber that broke the Japs' hearts at Midway."

A famous Eastern jewelry concern, source of many a costly lavalliere and brooch, now does fine machining for the deadly PBM-3, Martin-built Navy patrol bomber.

These are a few typical examples of the way in which civilian factories—hundreds of them—are helping The Glenn L. Martin Company turn out bombers. Their cooperation has, in effect, added millions of feet of floor area and thousands upon thousands of skilled hands to the space and labor devoted to turning out Martin bombers. Thus a sizeable percentage of the parts that go into our bombers are made by subcontractors. This is in addition to such government-furnished equipment as radios, propellers and motors. It gives a tremendous lift and it helps get fighting planes to fighting men much more quickly than would otherwise be possible.

Here is a typical example of how such a useful association begins:

Not long ago the general manager of a firm in the Midwest called the Martin plant by phone. Priorities had knocked his milk can business into a cocked hat and he wondered if his factory could be useful to us in some way. He had an idea he could convert it into a shop to make wing spars for our bombers. Bombers need a lot of wing spars; we were interested at once. A procurement engineer—we have 40 of them at large roaming the country in search of just such opportunities—went to look over the plant. He found its facilities unsuited to the making of wing spars but ideal for turning out exhaust stacks. Result: Today the milk can factory is furnishing exhaust stacks for such terrors-to-the-Axis as the Martin 187.

This incident is neither unusual nor extreme. Indeed, it is typical of the vast subcontracting experience which this company has built up since it startled the industry in 1939 by apportioning nearly 20 percent of the work on a single bomber type to other concerns by subcontracts. Today, under the terrific pressure of war production, that figure has nearly doubled and has been applied to three types of bombers now being built on a quantity production basis.

Martin's pace-setting step of 1939 provided a good lesson in subcontracting for the even more strenuous times that were to come. France, threatened by swarms of German war planes, turned—although too late—to this country. Martin immediately went to bat by doubling its plant size in 77 days and quadrupling its personnel by a rush-order training program. However, even this was not enough to keep abreast of the unheard-of demand for production of bombers, so the company logically decided to find some means of utilizing the facilities and talents of other industries and plants, large and small, whose business had been curtailed by reason of priorities or other restrictions.

Martin experts surveyed the field, located plants that could handle production jobs, showed them how and put them to work. The company's pro-

(*Turn to page* 223)

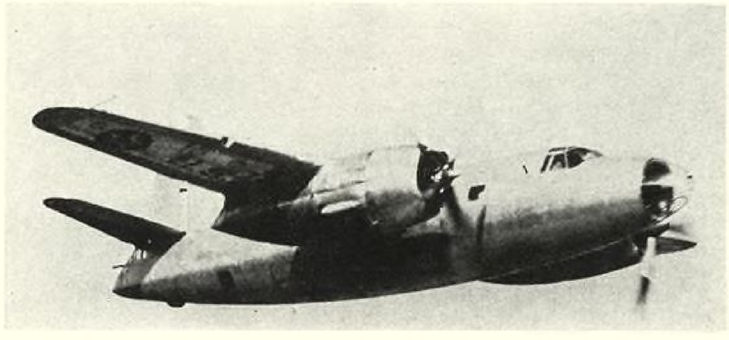

The deadly Martin B-26 bomber, one of three types being built by Martin with the aid of subcontractors whose plants are located in states reaching from coast to coast and up to the Canadian border. Subcontractors account for nearly half of the component parts which roll off the Martin assembly lines as finished aircraft.

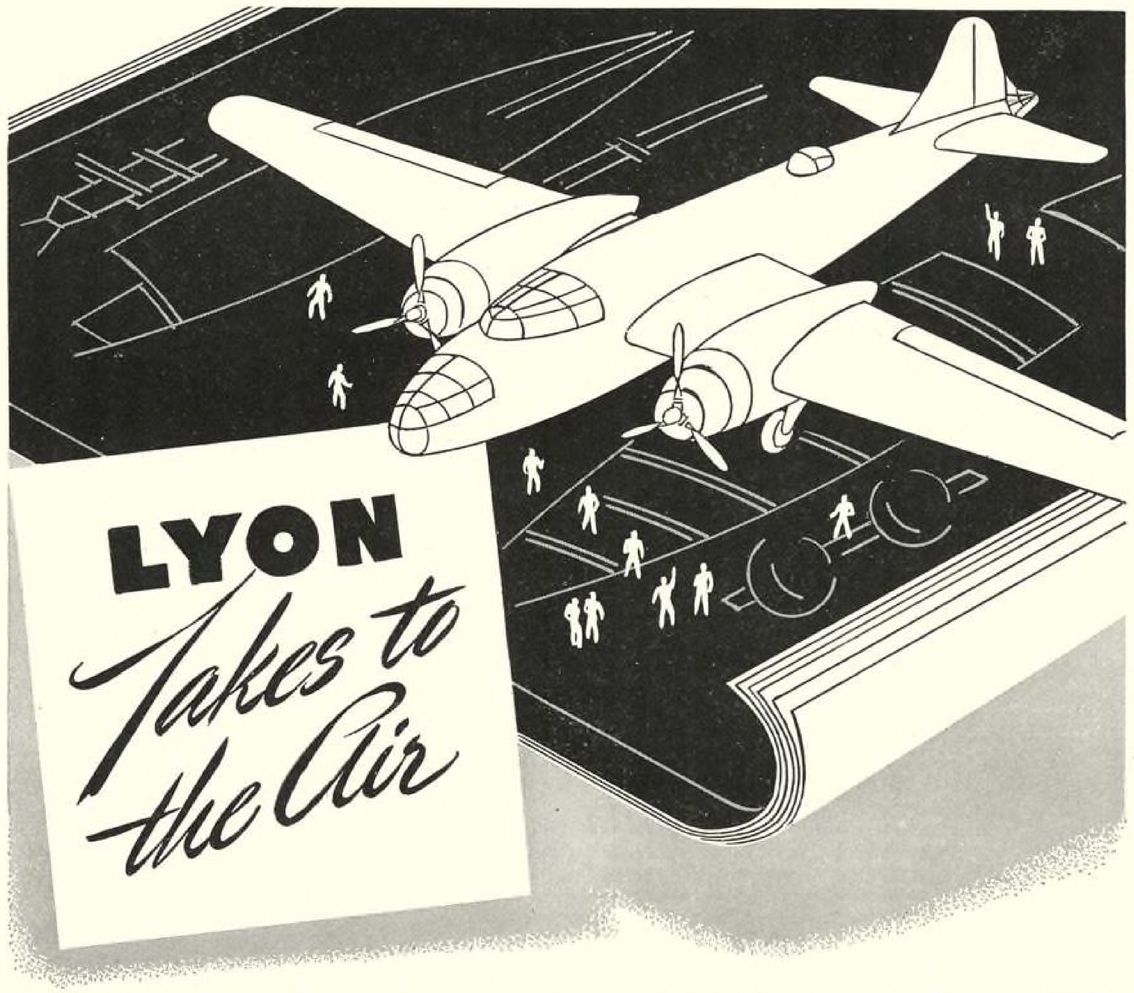

LYON

Takes to the Air

Now Producing Aircraft Parts in ALUMINUM as Well as STEEL

● For more than two years Lyon's resources, facilities and organization have been concentrated on the production of war products. Careful research demonstrated that our experience in the fabrication of sheet metal made it practical to expand our war effort to include production of urgently needed aircraft parts.

Our new Aircraft Division . . . completely equipped, and supervised by foremen specially trained in aircraft plants . . . is now in production. First contracts cover manufacture of Ailerons, Rudders, and Elevators in aluminum, plus Vertical Fins, Stabalizers, Elevators and Carburator Intake Valves made of steel. Check list indicates the types of aircraft parts on which we can offer production help.

We invite your careful investigation of Lyon facilities for helping aircraft manufacturers increase their war production.

LYON METAL PRODUCTS, INCORPORATED

General Offices: 5812 Madison Avenue, Aurora, Illinois

Branches and Distributors in All Principal Cities

✓Check LYON Facilities for Producing

✓ 1. Wing Tips	✓ 9. Transport Cabin Benches (Seats)
✓ 2. Fire Walls	✓ 10. Elevators
✓ 3. Doors—Cabin and Bomb Bay	✓ 11. Vertical Fins
✓ 4. Cowling	✓ 12. Stabilizers
✓ 5. "Control" Surfaces	✓ 13. Gas Tanks
✓ 6. Wing Struts, Framing, etc.	✓ 14. Flaps
✓ 7. Wheel Pants	✓ 15. Ammunition Boxes
✓ 8. Nacelles	✓ 16. Installation Flap Doors

Our illustrated book, "Craftsmen in War Production" contains interesting data on our two plants and details of our 43 years of production experience with metal. Write for it.

LYON METAL PRODUCTS, INCORPORATED

eurement staff still keeps in close touch with these outside concerns and is constantly on the alert to discover more such plants. They help to set up machinery, rearrange factories, locate materials and train personnel.

The result is that today our subcontracting system throws a mighty net of supply lines all over the country. Parts come to the main assembly plants from Connecticut, Wisconsin, Ohio, Iowa, Illinois—even from as far away as California.

Some of the changes in products that the war has wrought would sound amusing if this whole thing weren't so deadly serious. One firm that used to make bottle caps for soft drinks now builds wing spars for the B-26. Another that used to build escalators to save "milady" the trouble of walking upstairs sends mountings for gun turrets, from which American fighting men shoot down Nazis and Japs. A third, in other days a great producer of galoshes and raincoats, makes the famous Martin self-sealing gas tank.

The smoothness and efficiency with which the subcontracting system functions would not, however, be possible without the day-and-night services of the company's staff of expediters who range the country from border to border and coast to coast. The life of an expediter is not an easy one. The only shift this tireless crew knows is getting quickly from one place to another, and it is more or less routine for them to spend most of their nights in airplanes or trains which, under present conditions, is at best difficult.

Jimmy Zimmerman, our chief expediter, tells of a case where one of his men rode inside a carload of steel in order to get to a Midwestern plant so that, in addition to delivering the steel, he could follow it right into the shops and get it onto the machines.

Zimmerman also tells about the case when the final assembly department called him out of bed at three o'clock in the morning to tell him that the flight test would be held up on two patrol bombers which were due for delivery in the morning, because a few specially designed fittings which had been promised had not arrived. Zimmerman immediately phoned the subcontractor, only to be advised instantly that one of his men was right there in the subcontractor's parlor, waiting for him to get dressed so that they could go to the plant and hustle the parts through inspection. Five hours later the parts were being installed on the airplanes, within two hours the bombers had been accepted by the Navy and were on their way to do their bit at some unknown front.

Not only do these men expedite parts and materials but they assist subcontractors with problems on tools, engineering and priorities. Here's a sample job they turned in:

Not many days before the Battle of Midway, we discovered that a certain bomber part, made of aluminum, was not working as well as it should. It was decided to make the part of steel. It just happened that the factory best equipped to do the new job was in a Michigan city, a good distance from the Martin plant. By telephone we asked the aluminum plant to send by fast truck the die needed to make the part. Meanwhile the plant selected for the job didn't have the steel to make the part. The Municipal Airport at Baltimore was asked to hold a plane just about to take off with 14 passengers. The passengers got out of the plane and were replaced by a truckload of steel rushed from our plant.

The die reached the Michigan plant at the same time the steel did and production was started immediately. Planes

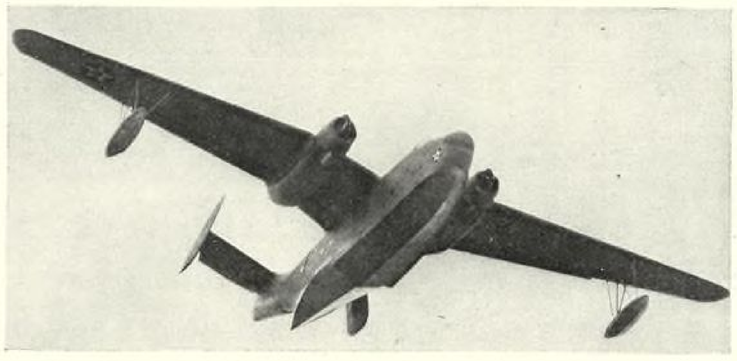

Cooperation of large and small subcontractors has played a vital role in speeding production of the Martin PBM "Mariners" for the Navy. Martin expediters are constantly roaming the country seeking firms capable of producing aircraft parts and working with already established subcontractors to help insure steadily increasing production.

Are you interested in: (1) Reducing time and cost of handling tools and materials; (2) Saving floor space; (3) Increasing protection against fire, sabotage and personal injury hazards?

This comprehensive catalog contains many suggestions for meeting these war-time problems. It illustrates and describes many types and sizes of shop boxes, work benches, portable tool stands and many other items that manufacturers of Airplanes and Airplane Parts are finding most effective in every production operation.

Mail coupon today for your copy of this useful book.

LYON METAL PRODUCTS, INCORPORATED

General Offices: 5811 Madison Ave., Aurora, Ill.

Sales and District Offices Manned by Experienced Engineers in All Principal Cities

LYON SHOP EQUIPMENT *Service*

LYON METAL PRODUCTS, INCORPORATED
5811 Madison Avenue, Aurora, Illinois

Send FREE copy of Lyon Shop Equipment Catalog.

*Name*_____

*Address*_____

*City*_____ *State*_____

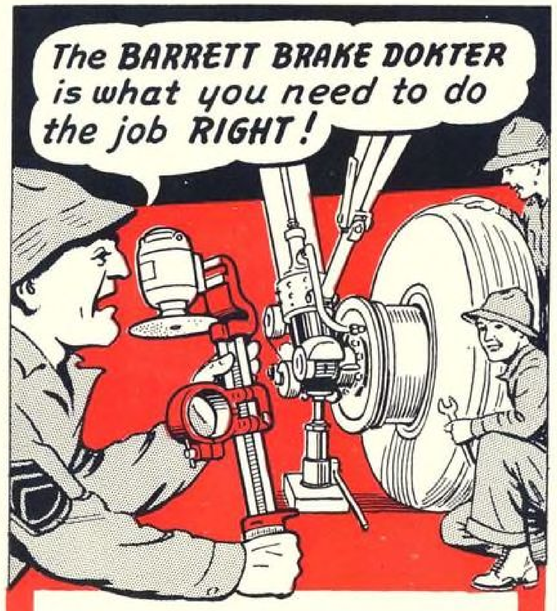

Right you are,— servicing brakes on planes is a "cinch" when you have a Barrett Brake Dokter on the job.

Today, good brakes on aircraft is of paramount importance. Good brakes don't mean a thing when the planes are up in the "blue," but when they land a lot depends on *good* brakes. Terrific landing speeds and high heat temperatures in the drums are hard on brakes, and if the brakes are not properly installed and serviced, damaged ships, injury, and very often fatal accidents result. Keep 'em flying . . . Keep 'em safe . . . Keep brakes in perfect shape with the Barrett Brake Dokter.

The BARRETT BRAKE DOKTER
is the answer to Precision Brake Service

The Barrett Brake Dokter actually grinds the brake shoes to the exact drum size while the brakes are in position on the landing gear. It centralizes and adjusts brake shoes perfectly, removing all high-spots and compensates for warped and distorted backing plates and shoes . . . It is a drum gauge, shoe centralizing tool, lining grinder, caliper and drum-to-shoe clearance gauge all in one.

Barrett Brake Dokters, Lathes and other Barrett Brake Service Tools are being used by the mobile forces of the Army, Navy, Air and Marine Corps, and on the production lines of many factories.

BARRETT EQUIPMENT CO.
World's Finest Brake Service Tools
2101-07 CASS AVENUE ST. LOUIS, MO.

Let KINKEAD Roll Vital Metal Sections with their Precision Equipment

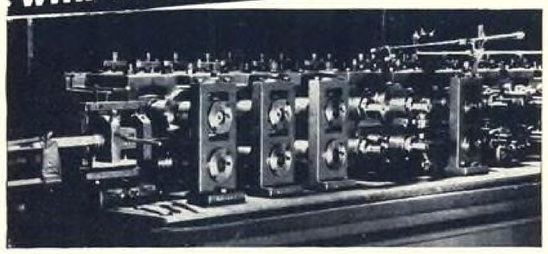

TYPICAL ROLLED ALUMINUM ALLOY SECTIONS

EXPERIENCE!

For nearly fifteen years, Kinkead has been roll-forming an extensive quality line of channels, edgings, nosings, trim, etc. from aluminum, brass, stainless steel and other metals. Contracts with major aircraft builders for roll-formed structural sections are currently being carried out with full speed and efficiency.

Why not take full advantage now of Kinkead's vast experience, specialized knowledge and expanded manufacturing facilities for your close-tolerance requirements of special channels, angles, stringers, hat sections, Z bars and substitutes for aluminum extrusions.

ROLLING EQUIPMENT!

With Kinkead precision-built roll-forming machines and automatic cut offs, aircraft sections can be roll-formed to much closer tolerances than obtainable by many present production methods now employed in the aircraft industry. With Kinkead's high rate of production speed, the ratio of die cost to production becomes negligible. Furthermore, shapes rolled on Kinkead equipment can be designed for required strength only and possess an unusually favorable ratio of strength to weight.

PRODUCTION FACILITIES!

Kinkead rolling machines are supervised and operated by precision trained crews of experienced craftsmen working in modern, fireproof quarters. Drilling, punching, buffing and washing equipment, as well as tool and die facilities, are maintained at highest standards. Good shipping facilities assure prompt movement of finished material. Recent equipment additions place Kinkead in a preferred position to handle your requirements as needed.

We will be glad to provide you with further detailed information regarding our capacity and ability to manufacture rolled sections to your exact specifications.

Write . . . Wire . . . Telephone . . . NOW!

PLANT OFFICIAL CONTACT: W. S. Kinkead--B. W. Brooks

KINKEAD INDUSTRIES
INCORPORATED
1609 N. Wolcott Ave., Chicago, Ill.

kept up a shuttle service between the Martin plant and the Michigan city carrying steel one way and finished parts back for final machining. Three days after the first lot of finished parts left our plant, they were actually in the thick of the Battle of Midway.

Of course, this is not a common occurence, for battles like Midway are not fought every day, but it does give some idea of the speed and pressure under which subcontracting work is handled. In addition, it offers a typical example of the type of cooperation we receive from hundreds of companies that are doing, with us, all they can to help win this war.

How do we set up such valuable connections with outside firms? It happens in various ways. Some of them are great corporations who come to us offering to help; some are great corporations whose help we go after. Some of them are tiny concerns, employing a handful of men or women who see their business about to evaporate through lack of materials. Just as is the case of the big corporations, some of them come to us with offers to help; to others we go with offers of a chance to play their part in the building of Martin bombers.

In any case, the practice of subcontracting has the obvious merit of getting planes into the air faster than if aircraft manufacturers were working alone at the job. And it adds to the roster of men and women in the aircraft plants thousands upon thousands of men and women who are directly helping to get planes to battlefronts throughout the world.

Indeed, cooperation in the war effort is the keynote of the whole plan. Firms which in peacetime turned out hosiery and kitchen stoves and refrigerators and razor blades eagerly help us hold the air front by sending in ammunition chutes, gun cradles and parachute slings. Such products arrive at the Martin plants, edge into their spots on the assembly line and presently are winging aloft wherever our fighting men are engaging the enemy.

Some of our subcontractors have their plants in large cities, others in towns you never even heard of. The dollar value of their output ranges from hundreds to millions. But in all cases the result is simply this:

Through the splendid cooperation of its subcontractors, Martin is today delivering bombers at a rate of speed that is causing, and will continue to cause, the Axis powers no end of worry.

Martin appreciates this cooperation.

Men and Machinery Available for War Work

Both heavy and light precision tools, together with skilled operators, are available for war work. Prime contractors interested in those listed below should address inquiries to AVIATION, 330 West 42nd St., New York, N.Y., referring to the key number with each item.

132. New Jersey metal fabricating firm, founded in 1883, has two plants with over 200,000 sq.ft. of floor space, offering the following facilities: Five light geared head engine lathes with 10-to 18-in. swing, 0.002-in. tolerance; four similar heavy duties, three of 0.002-in. tolerance and one of 0.004; seven horizontal milling machines, 0.001-in. tolerance; one vertical boring mill, same tolerance; four 0.002-in. tolerance plain radial drilling machines of 6- to 15-in. column; seven uprights of 20- to 30-in. swing, same tolerance; five sensitive single spindles, four of 0.001-in. tolerance and one 0.002; four planers,

Specialist
Designers & Manufacturers of
MANIFOLD EXHAUST SYSTEMS
cowl wells, muffs, air scoops, supercharger housings and other stainless steel portions of engine nacelles . . . for leading prime contractors.

AIRCRAFT COMPONENTS INC. USA

AIRCRAFT COMPONENTS, Inc. VAN NUYS, CALIF. WICHITA, KANSAS

Christmas Gifts . . .
For
ADOLPH HITLER

Scrawled across the bottom of a packing case leaving our factory doors recently, appeared this inscription:

"To Adolph Hitler — you've earned the kind of Christmas gift this will help to carry to you."

The worker who chalked that message on a shipping case symbolizes the American attitude . . . just one year after Pearl Harbor!

Many other shipping cases are leaving our doors. Hundreds of them. Each is destined for an aircraft assembly line . . . or for a parts replacement center.

Each will help to carry to Adolph Hitler —or one of his Axis partners — the kind of Christmas gift he so richly deserves.

AIRCRAFT MECHANICS, INC.
Colorado Springs Colorado
"The Rockies' Largest Manufacturer of Welded Aircraft Assemblies"

Increase SPEED AND ACCURACY WITH SHEFFIELD PRECISION GAGING INSTRUMENTS

e Visual Gage is available in six magnifica-ons—500, 1000, 2000, 5000, 10000 and 20000 to -for checking production and reference ges, work in progress, receiving and final spection, laboratory and research work. Pitch diameter checked by special attachment.

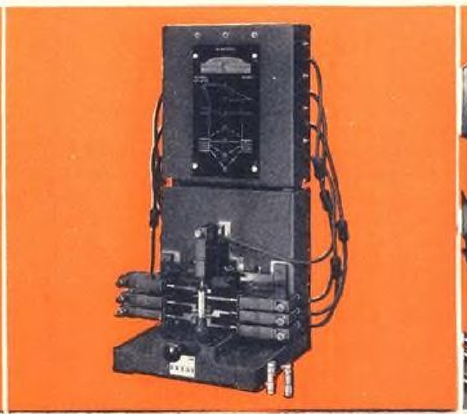

The Multichek is a combination gage which checks simultaneously a number of critical dimensions, indicating by light signals whether each dimension is within, above or below tolerance limits. A master signal integrates all individual signals for maximum checking speed.

The Precisionaire is an airflow gage for the checking of internal diameter, taper and out-of-round on long and/or small bores such as rifle barrels and other relatively inaccessible holes. The gage may be presented to the work, Model A, or the work brought to the gage, Model B.

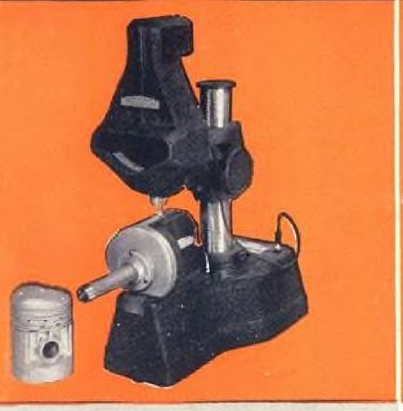

e Internalgage checks hole diameter and -of-round with the same precision as external nensions are checked on the Visual Gage. s very advantageous where selective assem- is concerned as in the case of the special piston application illustrated.

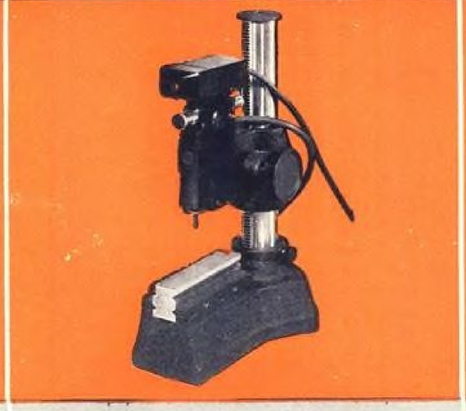

The Electrichek is used to show instantly by signal lights whether a dimension is within tolerance, undersize or oversize. It is used as an inspection gage. It can also be mounted on any special fixture desired or directly on a machine to check parts in process or for machine control.

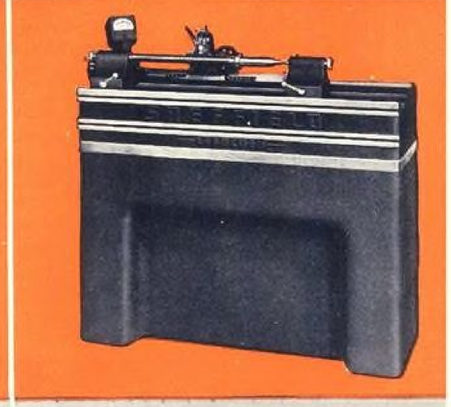

The Thread Measuring Instrument is a combination electrical and mechanical device for checking the lead of screw threads or rack teeth. Precision gage blocks are used as a direct reference. A Super-Precision Micrometer facilitates an accurate set-up and the checking operation.

Descriptive literature available upon request

THE *SHEFFIELD* CORPORATION

DAYTON, OHIO, U. S. A.

SHEFFIELD GAGES — MASTER GAGEMAKERS

FACTORIES FIND EXTRA VALUE IN *SUSPENDED* GAS HEATERS

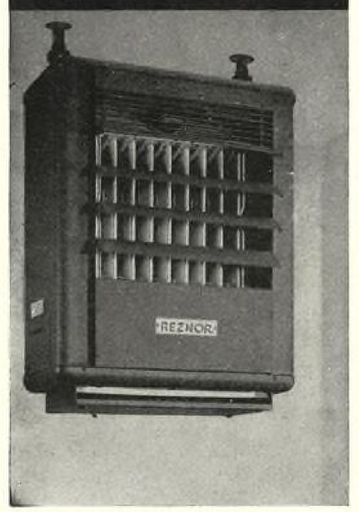

AND now in the industrial field, Reznor Unit Heaters have proved themselves outstanding. Yes, their ability to deliver lots of warm air over wide areas is one of the reasons. But, delivering heat from a suspended position, above the working zone, also helps to make Reznor Heaters valuable to production management.

Reznor Unit Heaters may be easily and quickly installed — with lower installation costs. This type heating equipment also uses 89% less vital materials than cast radiation systems. You'll find it worth-while to investigate. Write for catalog U 42.

REZNOR MFG. CO.

403 James St. Mercer, Penna.

GAS HEATERS EXCLUSIVELY SINCE 1888

Subcontractors Section

two of 0.002-in. tolerance; three shapers, 0.005 tolerance; five saws; four threaders; one threader and one tapping machine plus grinding equipment. Also available are 37 portable arc welders; three transformer type; three radiograph and three pantograph acetylene cutters and five welding positioners; five heating, hardening and stress relieving furnaces and two sandblast rooms. Sheet and plate shops have, among the bending machines, three brake presses, five roll type, one hydraulic flanger and one seam roller; punching machines include four vertical single end, two horizontal single end, three punch, two blanking, three gang punch, six horizontal punching and riveting and one double housing multi-punch; nine shearing machines, including two armor plate shears; and three presses of from 10 to 150 tons.

133. Pennsylvania photo-engraving concern seeks template reproduction, reducing or enlarging scale drawings or making photographic records for filing, offering the following equipment: Process cameras 24x24 in.; dark rooms, vacuum contact frames, routing machines, beveling machines and acid-etching facilities.

134. New York firm, a merger of one which had been in aircraft maintenance and overhaul and sales work for more than 10 years with one of 40-years experience in precision instrument manufacture, seeks subcontracts and offers the following equipment: Six 0.002-in. tolerance engine lathes of from 6-to 16-in. swing; six precision lathes with 0.0005-in. tolerance; two 0.005 and one 0.001-in. tolerance lathes with attachments; a turret lathe with millimeter thread chasing attachment; a power press; a screw machine; a gear cutter; eight drill presses; four saws; four grinders; two shears; a preheating furnace; welding equipment; soldering bench and miscellaneous equipment.

135. Massachusetts research and development laboratory producing medical equipment, already engaged in electronic instrument subcontracting, seeks additional work in the aircraft industry. Equipment includes: Engine lathe; shaper; drill press; jig and circular saws; buffing lathe; grinder; engraving machine; squaring and slitting shears; audio oscillator, 7-70,000 cycles; cathode ray oscillograph; electronic voltmeter; impedance bridge; test sets, meters, communication receivers; and 110-v. d.c. c.v.d.c. 50-cycle a.c. generators.

Stamping Grounds for SMALL TOUGH JOBS..

Typical small parts produced on GOAT Eyelet Machines . . . small, medium capacity equipment to produce a variety of light drawn and shaped articles required in volume. Handle parts up to .015" x 1½" blank diameter. GOAT specializes in production of stamped, drawn and formed metal parts ranging from .002" to 1/16" metal thickness using all type metals and alloys. Inquiries invited.

GOAT METAL STAMPINGS, Inc.

Division Of THE FRED GOAT CO., INC.
Machinery Specialists since 1893
314 DEAN STREET, BROOKLYN, N. Y.

SKILL and EXPERIENCE

SPECIALISTS in preforming and shaping aircraft plywood from flat stock.

PLYWOOD ANGLES
PLYWOOD CHANNELS
PLYWOOD TUBING

A CAPABLE ORGANIZATION with ample capacity to meet your requirements promptly.

Send us your blueprints and specifications

WIRE OR WRITE TODAY.

HERMSDORF FIXTURE MFG. COMPANY
MANCHESTER, N. H.
Plywood and Wood Parts

Hard-boiled babies

Adolf...here's that bomber—*again.* This hard-boiled baby helped stall your *Wehrmacht* at Dunkerque...and just the other night it was back blasting your ports, hounding your shipping.

Hermann...it's that Hudson your *Luftwaffe* has never really stopped...the ship the R. A. F. calls "Old Boomerang"—because it always comes back.

Hirohito...Tojo's met this Lockheed too, and he'll keep on meeting it...lots of places, and doing lots of things. For the Hudson not only does a job; it invents new ones for itself!

And, boys, it's got a big brother, the Vega Ventura, that has all the family characteristics, and some new tricks of its own! Lockheed Aircraft Corporation...Vega Aircraft Corporation...Burbank, Calif.

for protection today, and progress tomorrow, look to

Lockheed

FOR LEADERSHIP

Member Aircraft War Production Council, Inc.

HERE'S SOMETHING TO HELP YOU Clear the Air

HANDBOOK OF SPECIAL STEELS

Newly revised and reprinted—a comprehensive book on the properties, uses, and best methods of handling, treatment, etc. of tool, stainless and other alloy steels. Plenty of tables to facilitate quick reference and selection. 128 pages, pocket-sized, latest data.

ELEMENTARY DISCUSSIONS: TOOL AND STAINLESS STEELS

Informative booklets giving clear, detailed data on the various types of tool and stainless steels, their properties and handling. Excellent for training courses in metals and metal-working.

THE lack of information can throw a pretty effective smoke-screen around jobs on the production lines. After all, it's about the same as on the firing line—you can't hit them if you can't see them.

Your plant is probably no exception to the general run of war producers. All have a steady job on their hands of training a stream of new men and apprentices in specialized machine operations or other fabricating procedures. Where the needed information concerns alloy steels, you'll find invaluable the publications listed in the panel to the left.

They're primarily for production men. For engineers and designers, complete and certified technical data on the various types of stainless and tool steels is available in Allegheny Ludlum "Blue Sheets." ● Write for the information or the personal assistance you need.

STEEL FOR THE NATION'S WELFARE

Allegheny Ludlum
STEEL CORPORATION
GENERAL OFFICES: PITTSBURGH, PENNSYLVANIA

A-8677 . . . W & D

Yes, THE HELICOPTERS ARE COMING

THAT'S a fact which has just been brought home to the American public by Igor Sikorsky's recent article in *The Atlantic Monthly,* reprinted in *Reader's Digest,* and by the Sikorsky helicopter pictures in a recent issue of *Life.*

But it wasn't news to Aircooled Motors Corporation, whose Franklin engine powered the original Sikorsky experimental helicopter during its development period.

Whether it's a stock engine for a light plane, power for a helicopter, or designing and building warplane engines for Uncle Sam's Army and Navy (our current job) . . . you can depend on Franklin's 42 years of air-cooled experience to produce fine engines.

AIRCOOLED MOTORS CORPORATION, SYRACUSE, N.Y.

Relays BY GUARDIAN · · · SERVE ALL FRONTS!

★ Yuletide joys of '42 will not include the many electrical gifts which brought us cheer, and ease, and comfort in other years. Relays by Guardian have marched on from peacetime industry to the firing lines of war. Doing war jobs in many ways . . . in planes . . . in tanks . . . in communications . . . in bomb releases and gun controls. Wartime jobs which Guardian anticipated and planned long before "Pearl Harbor".

But, while thinking, building, and engineering the tools of war today, Guardian again is looking *ahead* to peacetime applications of Relays, Solenoids, Electrical Controls of all kinds. If you are making plans for "after-it's-over", ask our engineers to plan with you. Write to Guardian. Our wartime experience can help you build better products for the future.

CONTROLS FOR ANY PURPOSE...*ranging from 150 watts to 1000 amps . . . from tiny relays weighing less than an ounce . . . to big, rugged two-pound contactors.*

GUARDIAN ELECTRIC
1614 WEST WALNUT STREET CHICAGO, ILLINOIS

A COMPLETE LINE OF RELAYS SERVING AMERICAN WAR INDUSTRY

New Aviation Facts Book

An up-to-this-minute file of marketing information prepared by the Research Department of Aviation

WHAT are the facts of today's aviation market? What does the industry buy . . . and what are the sales possibilities for *your* product? Who are the important buying influences to consider in selling and subcontracting to airframe manufacturers, engine builders, parts and equipment suppliers? What is the wartime status of air transport — of civil aviation?

Most challenging question — what are the post-war market potentialities of the aviation industry?

These are some of the questions uppermost in the minds of foresighted business men today. These are a few of the questions this booklet treats *factually* and *objectively*.

We believe this study to be the most informative and up-to-the-minute presentation of aviation market facts obtainable. Within the limits of publishable information it is accurate and unusually comprehensive.

The method of reaching this market

Equally as important as *what* comprises the market is *how* that market can be reached.

Thus the latter half of the booklet offers a thorough analysis of *Aviation,* the prime method of sales communication with the executives of the aeronautical field.

Here in concise, readable, easy-to-analyze form is a clear presentation of the editorial policy and purpose of *Aviation*—a demonstration of its daily usefulness to the men who are building our air strength today and who will build our air commerce tomorrow.

Designed for analytical sales executives and advertising buyers, the circulation section of the booklet shows clearly how *Aviation's* circulation thoroughly covers the industry's buying power. How it is directed to the men you must sell, the executives who have the yes-or-no in purchasing decisions in aviation's manufacturing, operating and maintenance divisions—and that important group—the government and military authorities concerned with aviation activities.

To interested executives, a copy without cost or obligation

A limited quantity of these booklets is now available to advertising and sales executives. A request on your business letterhead will bring your copy promptly. Address Market Research Division of *Aviation.*

AVIATION

A McGraw-Hill Publication • 328 West 42nd Street, New York, N.Y.

OFFICES IN CLEVELAND, DETROIT, CHICAGO, BOSTON, PHILADELPHIA, WASHINGTON, ST. LOUIS, ATLANTA, LOS ANGELES, AND SAN FRANCISCO.

from the index . . .

Aviation — the Market
The structure of the aviation industry.... 3
What the aviation industries buy.....11-13
How prime contractors subcontract..... 20
Future Air Transport- all-purpose carrier.. 23
Tomorrow's private flying..... 28
Organization of Army & Navy air forces.. 29
Aviation — the Magazine
Information for every industry interest.34-35
Going-to-the-source-of-the-story methods. 46
Concentration on the Men Who Buy....50-51
First-hand evidence from key readers..... 56



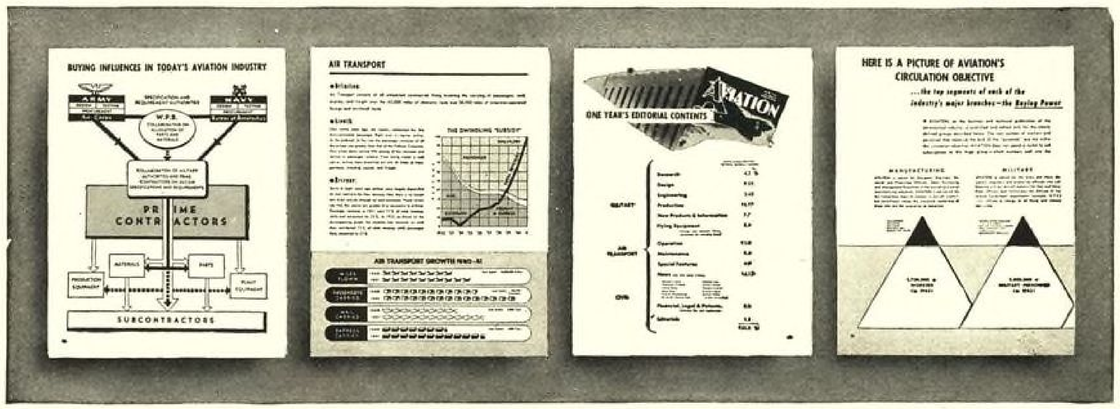

Before new spar designs are crystallized . . .

★

Countless man-hours of production time and thousands of dollars in original equipment can be saved in almost every instance by coordinating spar design with the mills required for fabrication. Even slight modifications in spar construction can frequently increase production efficiency many fold. Paragon engineers offer you practical experience in this important phase of aircraft production.

★

PARAGON RESEARCH, INC.

Cooperating with

FARNHAM
MANUFACTURING COMPANY
BUFFALO, N. Y.

★

SALES REPRESENTATIVES:

NEW YORK: C. L. Wachter, 11 West 42nd St. . . DETROIT: T. Jacobowitz, 13700 Woodward Ave. at Highland Park . . SANTA MONICA: H. A. Powis, Bay Cities Bldg.

★ ★ ★

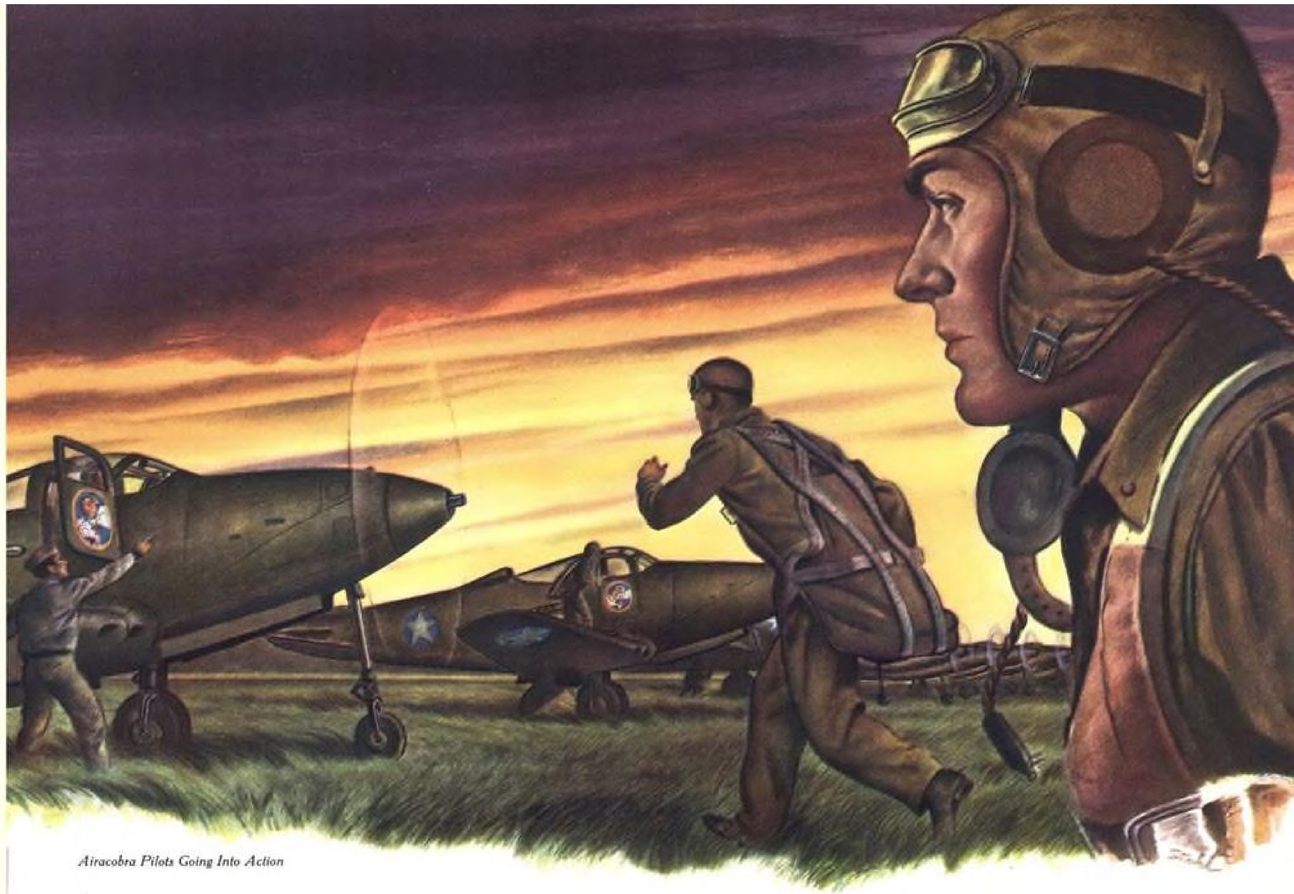

Airacobra Pilots Going Into Action

HEADACHES FOR HITLER—Coming Up!

Over the loud speaker at a distant Allied Air Base comes the warning call "Enemy Aircraft Approaching—Scramble." In trigger-quick response—fighter planes are manned. Then, with deafening roar, a squadron of Army Airacobras takes the air.

Courageous and determined, these Army Air Force Pilots rise to combat, confident that they man the hardest-hitting single-engine fighters in the world. These men deserve the best America can put behind them.

A forward looking Aircraft Industry had sensed for years America's need for fighter planes that would out-fly and out-fight the best the enemy could offer. While ominous war clouds gathered into thunder-heads new plans and planes were under way.

Working with our Army Air Force we created the P-39 Army Airacobra. Free from precedent our engineers developed a new design from nose to tail. They put a cannon in the nose—placed the engine behind the pilot—gave it a tricycle landing gear. They made it a powerful weapon designed expressly for the needs of war.

Today these deadly fighter-planes serve Allied forces on fighting fronts around the world.

But some day victory will come. War-trained pilots will return to take their places in a new world of accelerated transportation. America will create new planes to carry on her commerce in the skies.

That day will find Bell Aircraft ready—ready with its engineering skill, assembly lines and trained personnel converted to the pursuits of peace-time aviation. © Bell Aircraft Corporation, Buffalo, New York.

Airacobras for victory—

FUTURE PLANES FOR PEACE

BELL *Aircraft*

PACEMAKER OF AVIATION PROGRESS

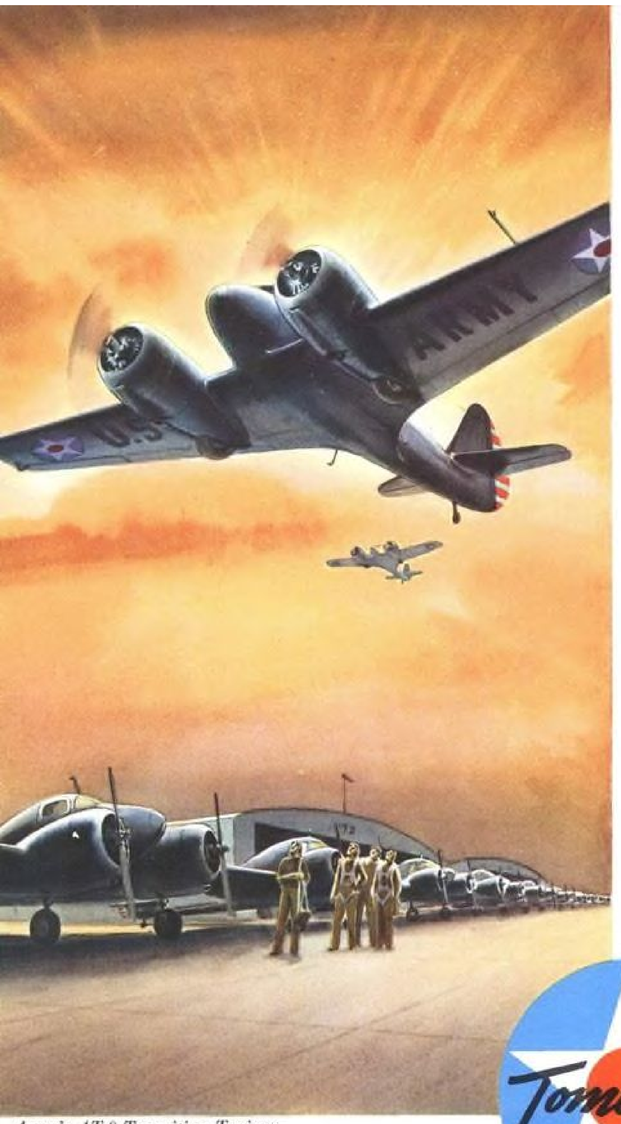

Army's AT-9 Transition Trainer

Navy's SNC-1 Advanced Trainer

Tomorrow's

ARMY AND NAVY HEROES OF THE AIR

SECOND PRINTING: Send 10¢ for **your** copy of this fascinating 96-page history of aviation by Assen Jordanoff, author of "Your Wings", with illustrations of current fighting types. Airplane Division, Curtiss-Wright Corp., Buffalo, N. Y.

Curtiss-Wright fighters, dive-bombers, observation and military cargo airplanes are conspicuous constantly in the war's headlines. But behind these headlines is another type of Curtiss-Wright ship—the trainer—in which thousands of America's superb fighting pilots today are winning their wings. Twenty-five years of development lie behind these modern training planes—for the world's earliest trainers were the famous "Jennys" of World War I.

CURTISS-WRIGHT
Corporation
AIRPLANE DIVISION

Curtiss-Wright
FIRST
Since the Birth of Aviation

1917•The world-famous Jenny (JN-4D) of World War I. About 5000 were delivered to the U. S. Army Air Corps and our allies. Maximum speed, 75 m. p. h.

1927•The Curtiss Hawk (AT-4) Advanced Trainer. Its 190 H.P. engine gave this ship a high speed of 133 m.p.h.—a cruising speed of 106 m. p. h.

1929•The Curtiss Navy Fledgling primary trainer (N2C-1). High speed, 108 m. p. h.; cruising, 87 m. p. h. Powered with a Wright J-5 engine.

1930•The Curtiss Army Falcon (BT-4)—a basic trainer with a high speed of 140 m. p. h. and a cruising speed of 112 m.p.h.

Side Slips

• MR. WEBSTER defines an ode as a "lyric poem of exalted style and tone, often of varied or irregular meter."

Even though he grants the leeway of "varied or irregular meter," this department still can't write a lyric poem. But if it were possible, this essay would be titled "Ode to the PBY." And it would tell one of the most heart-warming tales yet to come out of this war of the stamina and versatility of American aircraft and the ingenuity and guts of American airmen. Its climax would tell how a PBY was used to pinch hit as a combination dive and torpedo-bomber, blazing out of a sky full of *Zeros* to sink a Jap troop transport at a crucial hour in the defense of Guadalcanal.

First, though, this ode would relate how the PBY was designed and built way back in the early '30's as a long-range patrol bomber. It would tell of the excitement created when a group of them were flown in formation from the West Coast to their bases in Hawaii, and later from the West Coast to the Panama Canal Zone, an even more breath-taking feat. Such deliveries were feats in those days, even though the Navy always called them "routine deliveries."

• It would record, too, that a PBY—called the *Catalina* by the British—found and stalked the *Bismarck*, pride of the Nazi fleet. That was work for which the PBY had been built—spotting the enemy and keeping him under surveillance till surface units could be guided in for the kill.

Drudgery would not be overlooked, for the ode would tell of the long, grinding hours PBY's and their crews put in on war transport work. No heroics, no medals, no headlines—just back-breaking work that is such a large part of war, but without which no victories can be won. Nor could it ignore the hours—just as long and grinding—of reconnaissance, looking for enemy fleet units. And how, when Jap carriers with their nimble fighters were spotted, the PBY crews would radio the location and add laconically, "advise next of kin" because they were there to stay and fight as long as they could.

• THEN THE ODE would speak of Guadalcanal, to tell of a critical hour in its defense. For, in broad daylight the Japs were unloading troops from ocean-going transports. Something, to put it mildly, had to be done. The general wanted a torpedo plane. He got it. A PBY, a patrol bomber, was converted to a TB job. Meanwhile Marine Maj. Jack Cram was asking questions for, you see, he'd never done any torpedoing before. And his crew had never fired their guns in combat. But when that PBY and her torpedo load took off, Crew Chief Adam Metz; Engineer Darrel Anderson; Radiomen Albert Hoffman and Richard Horton, and Gunner Robert Kirby, were at their posts. There wasn't any co-pilot.

In breath taking words the ode would describe their climb into the sky, where 15 Jap Zeroes waited to blast them; it would tell how that crew got its baptism of fire; it would describe Maj. Cram's feelings as he stuck the plane's nose down and watched the air speed indicator go off the dial, way beyond any speed for which the craft had been built. And it would tell how that good old PBY, with bullet holes from nose to tail, kept her wings on and stayed in one piece as Cram pulled out of that screaming dive at 75 ft. to loose the torpedoes to sink that Jap transport, and how, because of its inherent strength, it brought its crew back to fight another day or, perhaps to grinding hours of patrol or transport work.

That ode would make a lot of Consolidated workers proud of all the PBY's they've built; it would make a lot of Americans proud of the men who fly them.

"Maguire couldn't get a priority order for a new flying suit."

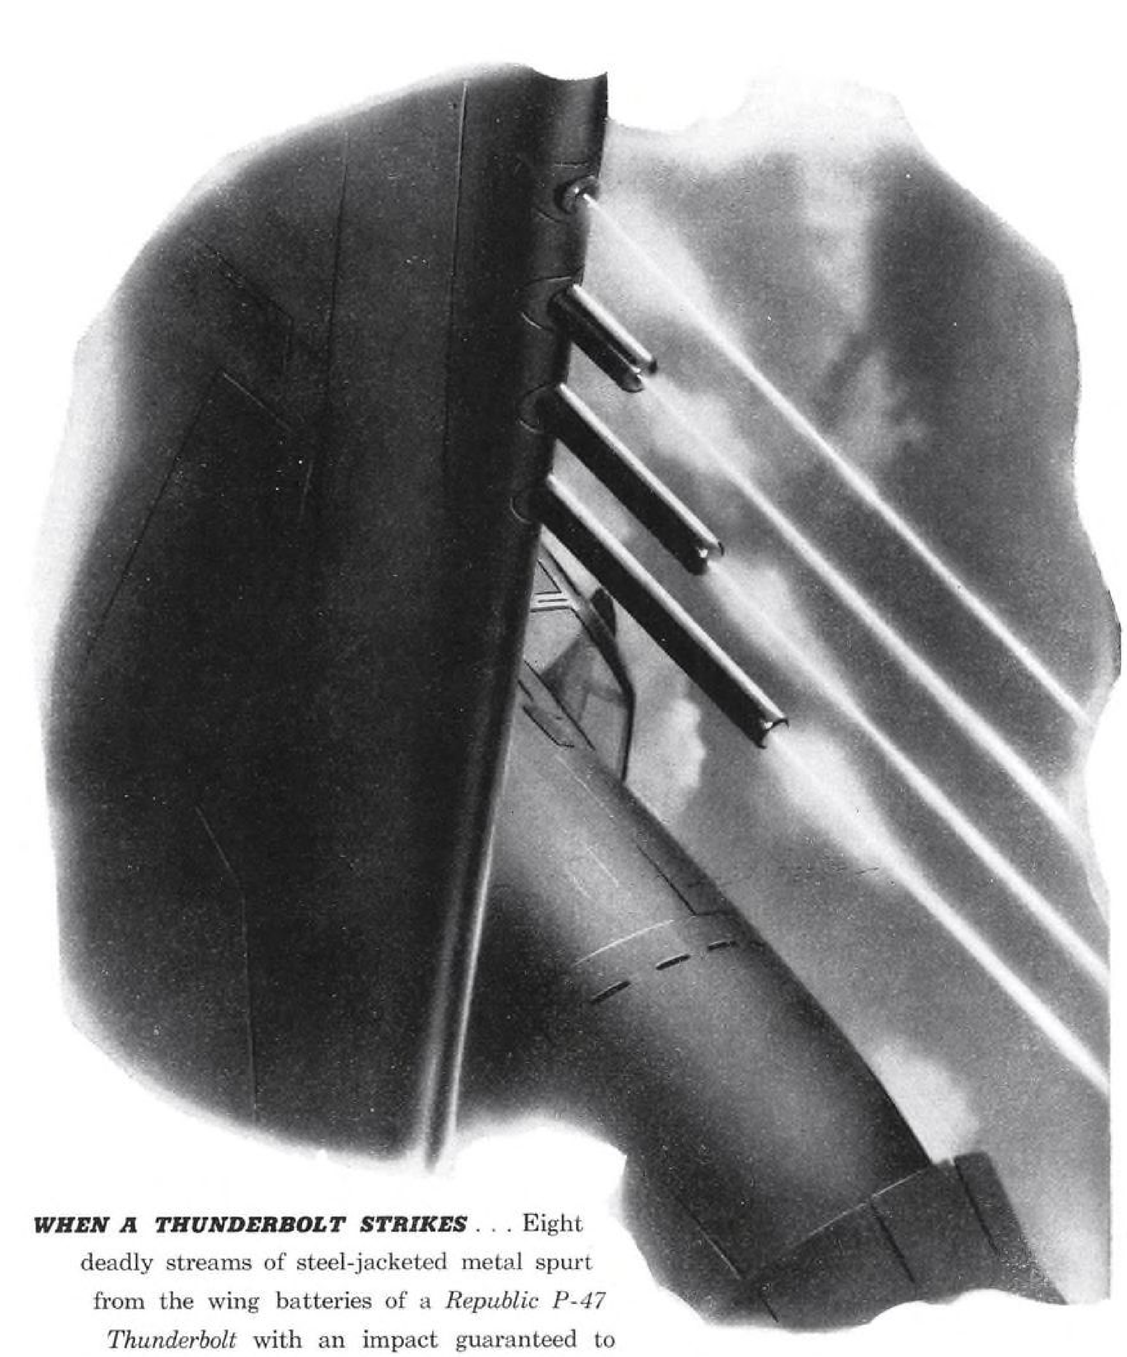

WHEN A THUNDERBOLT STRIKES . . . Eight deadly streams of steel-jacketed metal spurt from the wing batteries of a *Republic P-47 Thunderbolt* with an impact guaranteed to tear apart any Swastika'd Hun or ruddy Rising Sun that dares fly within range.

REPUBLIC AVIATION

REPUBLIC AVIATION CORPORATION — FARMINGDALE, L. I., NEW YORK

How Our Navy Gears Pilots For War

In revolutionary four-phase system, each cadet gets solid year of training, amasses nearly 300 hours. Meantime, Navy's new scientific methods have brought "bilge outs" down to an all-time low.

By LIEUT. (jg.) FRED TUPPER, JR.

FROM CORAL SEA to Midway, from the Aleutians to all Seven Seas, every dogfight, bombing attack, and patrol mission is putting a new heavy accent on the tremendous importance of naval air power. And meantime, while aircraft carriers thread through the mine-infested Mediterranean and waters across the Pacific to disgorge their umbrellas of planes, our Navy is also multiplying its aero efforts ashore.

Torpedo bombers and scouts, fighters and patrol planes are rolling in ever increasing quantity from stepped-up assembly lines. Dozens of carriers—counting the converted merchantmen—are being readied for action. Land-based fighters are joining the swelling air armada.

To keep pace, a vast new body of Navy pilots—30,000 strong—is training at air bases from Canada to the Gulf. Who is eligible to fly? Any young man between 18 and 27 who has a high school diploma (the two-years-of-college restriction is now "out") can "make it" if he is physically fit and can pass a "screening" test. To prepare these men, the Navy has introduced a revolutionary new type of training program designed not only to produce the best pilots in the world but to make them physically tough, mentally alert, and completely ready for any emergency of land or sea warfare.

It takes a bit of doing, and here's how the Navy is approaching the problem: Each cadet will get a solid year of training. The Navy will spend up to $27,000 on him personally, will guarantee that he'll get nearly 300 flying hours under his safety belt before he joins the fleet.

Training is split up into four phases, each of approximately three months duration. First, the cadet will attend a pre-flight school (each one is an "Annapolis of the Air") at one of four universities—at Athens, Ga., Chapel Hill, N.C., Iowa City, Iowa, or St. Mary's, Calif. Then, at one of a score of strategically scattered naval reserve bases, he will learn to fly in primary trainers.

Next step is advanced training at one of the huge naval intermediate centers, at Corpus Christi, Tex., or Pensacola, Fla. And finally, commissioned an ensign in the Naval Reserve or a second lieutenant in the Marine Corps, each pilot will have a course in operational training in combat or patrol craft before being assigned to active duty.

In cases where those applying at Naval Cadet Selection Boards cannot be sent immediately to pre-flight schools, there is even additional preliminary training. The Navy has arranged with the CAA for 8-week full time and 16-

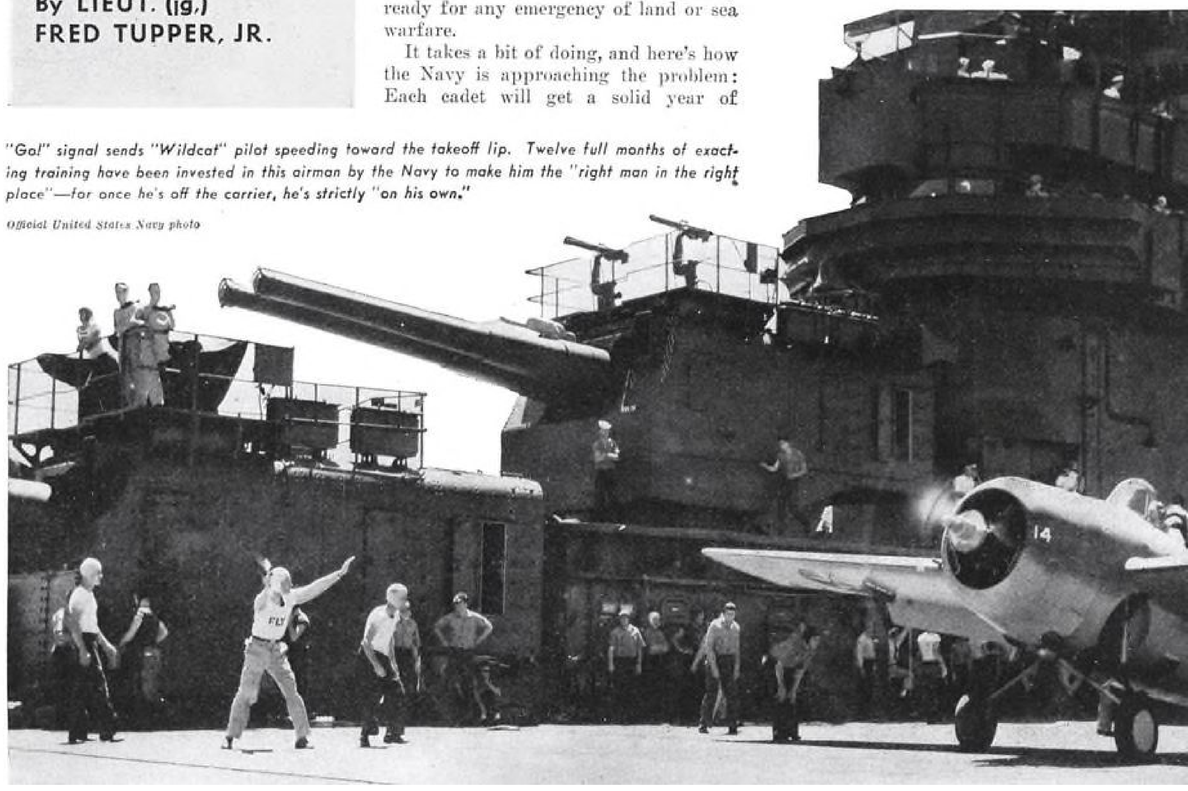

"Go!" signal sends "Wildcat" pilot speeding toward the takeoff lip. Twelve full months of exacting training have been invested in this airman by the Navy to make him the "right man in the right place"—for once he's off the carrier, he's strictly "on his own."

Official United States Navy photo

Official United States Navy photo, International News

Above: Grummans off for combat! Pilots have been trained to strike hard, and today 30,000 more Navy airmen are being carefully groomed at air bases from Canada to the Gulf—to multiply those blows into a victory crescendo.

Below: Masterful skill must be exercised by carrier pilot following completion of his mission. To find comparatively tiny mother ship on vast expanse of ocean calls for most precise navigation, and to set plane down on narrow flat-top demands faultless command of plane. Perspectives in accompanying photo of Douglas dive bomber over its carrier quickly indicate difficulties of both techniques.

International News photo

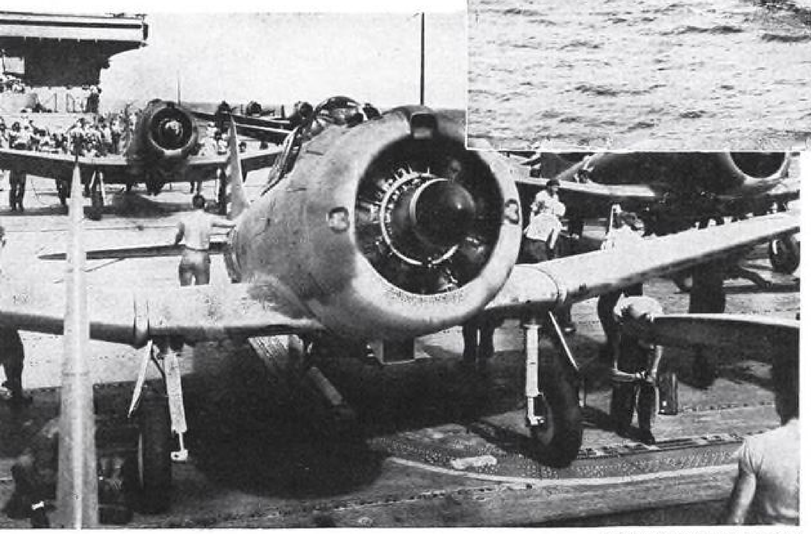

Official United States Navy photo

Command "Prepare to launch planes!" sends carrier crew into action "unlimbering" Douglas dive bombers. Thousands more Navy warplanes are being rushed off stepped-up assembly lines, and many new carriers are being commissioned to hurry them against the enemy. Meantime, the Navy pilot training program is keyed high to keep pace.

week extra-curricular CPT courses for Naval Reserve backlog. The CAA plans to train more than 20,000 of these men annually under the new set-up.

With such preliminaries, the cadet will represent a much better investment as a potential pilot. He will have an opportunity, long before he flies a Navy plane, to find out whether he has any aptitude for flying. He will be physically and mentally prepared for the rigors of modern warfare.

Attrition long has been the curse of pilot training. As recently as two years ago, trainee failures cost the Navy more than $3,500 for each cadet. However, with the introduction of CPT and preflight training, naval aviation expects that more than three-fourths of its cadets—roughly 23,000 a year—will become commissioned pilots. Meanwhile, cadets that "bilge out" have the opportunity to enter other branches of the service.

Navy flying has a specialized technique all its own. To be sure, differences from Army practice are minor in the primary flying training. Both the Army and Navy use the biplane (painted yellow in both services) almost universally; for the "bipe" is considered the soundest training machine for fundamentals. And both services stress the early drills in taxiing, tail-down landings, coordinated air work, and simulated emergencies.

However, while the Navy uses the elliptical pattern for precision landings, the Army stresses the triangular . . . the Navy does wingovers without pattern, the Army traces the nose in a figure-8. . . the Navy gives three checks before solo, the Army allows a cadet to take a plane out after his instructor gives him thumbs up. Still, the eventual result is the same—the cadets learn every trick in the flying book.

But the Navy points its training in a completely different direction. To catapult off a cruiser or battleship, to circle in for a carrier deck landing on a space just 60 ft. wide, to bring a seaplane down in a precision landing in a "slick"—these practices have no parallel in Army or civilian flying.

After a naval cadet has soloed successfully, he runs the gamut of aviation lore. He learns how to "slip" into a landing, how to do flipper turns, wingovers, spirals, and how to "shoot" 100 ft. circles. Simulated emergencies are periodic during primary instruction. The student must master small-field procedure and slips to the best possible advantage. All this will pay dividends later on.

These students literally "get the works." A Coney Island roller-coaster was never like this. They loop, snap roll to the right and left, master Immelmanns, split S's, and falling leaves. They learn precision spins and half-S turns to circles, and finally, there are demonstrations of the inverted spin and its recovery, toughest bugaboo of primary flying. From that day on, they fly from the front seat, then progress to intermediate training at Corpus and Pensacola.

By this time each cadet has had up to 80 hours in the air. Now he flies the advanced trainer—the SNJ—a heavier service-type plane, and he receives more formation work.

But the picture is not complete without ground school. Throughout the course, cadets receive exhaustive ground school instruction, thoroughly learning about planes from prop to tail. There are drills in powerplants, photography, gunnery, aerology, structures, navigation, and communication, more or less in that order—a comprehensive store of knowledge that must be mastered completely.

Each cadet must know how to put an engine together, to fire a machine gun, to analyze a weather report, and to map his course by the stars. Emergencies being the daily diets of modern warfare, a Navy pilot must be the "right man in the right place." For once he takes off from a carrier, he's strictly on his own.

At this advanced-training stage of his development, the cadet is granted the opportunity of requesting the type of duty he would prefer when he is assigned to the fleet. He may also ask for a specific geographic location, depending upon war strategy. Whenever possible, these bids are granted.

"Shore duty in Japan," read one recent request. Whereupon the Navy quickly replied: "Recommended approval—as soon as a shore base is established there!"

What finally happens is this: A student is given one of three assignments—carrier duty, which means flying fighters, scouting planes, or dive and torpedo bombers. . . battleship or cruiser duty, which involves flying catapulted seaplanes and being the "eyes of the fleet". . . or patrol duty in the giant flying boats which reconnoiter thousands of miles of sea.

Consider carrier duty. The day will come—sometime, somewhere at sea—when today's cadet will hear the brusque order, "Man your planes!" He will roar down the deck and take off, easy enough for an experienced pilot. But landing is a different story entirely. In the first place, finding a floating carrier upon return from a battle mission calls for a special technique in itself, based on thorough navigation training and flying experience. To set his plane down on the waving, teakwood surface is comparable to landing on a dime.

There were those Japs, for example, who hadn't quite learned the "trip home" technique. Returning from a patrol mission in the Coral Sea engagement, they attempted to flutter down on an *American* carrier deck. Anti-aircraft blasts quickly corrected their mistake.

To Navy pilots, takeoffs and landings are but minor phases in the over-all problem of flying a carrier-based plane. They must know the procedures of torpedo and dive-bombing, whole studies involving angles of approach, coordination of plane personnel, and methods of attack. They must learn similar and parallel duties for fighters and scouts. Every lesson correctly learned may mean American lives saved, surely promises to mean just the opposite for Japs and Nazis.

One of the trickiest operations known to naval aviation is detail aboard a battleship or cruiser. That means catapults. Sticks must be held all the way back on takeoffs, since the launching device hurtles the seaplane from a dead standstill to more than a 60 mph. speed before one can say "tachometer."

Landings on the water must be fully stalled, perhaps on a "slick" in heavy seas. These are precision landings—plus! The seaplane waits for the battleship or cruiser to turn, then sets down on the smooth water inside the turn (the "slick") near enough to the ship to permit a "cast" recovery. It's that, frankly—or else. The fleet hasn't time to wait for planes that miss. Nor can the planes themselves get off the sea during heavy weather.

A patrol bomber, again, is still another breed of cat. And a big one. These modern battleships of the air, powered with from two to four engines, are capable of flying great distances non-stop. As dreadnaughts of the air arm, they carry heavy loads of torpedoes, bombs, and mines. They are "flying households," complete with bunks.

(*Turn to page* 311)

Right: Precision, then performance! Seven Jap fighters were downed by Lieut. (jg) John A. Lappla, USNR (left), and ARM 3c John Liska, USN. Lieut. Lappla got four, Liska three.

Knack of takeoffs from the "jarring cradle" is first learned on dock catapult (which can't roll) aimed over calm waters. These advanced students, preparing for battleship or cruiser details, were "stopped" by camera in split second of their launching in Vought-Sikorsky OS2U-2.

Official United States Navy photo

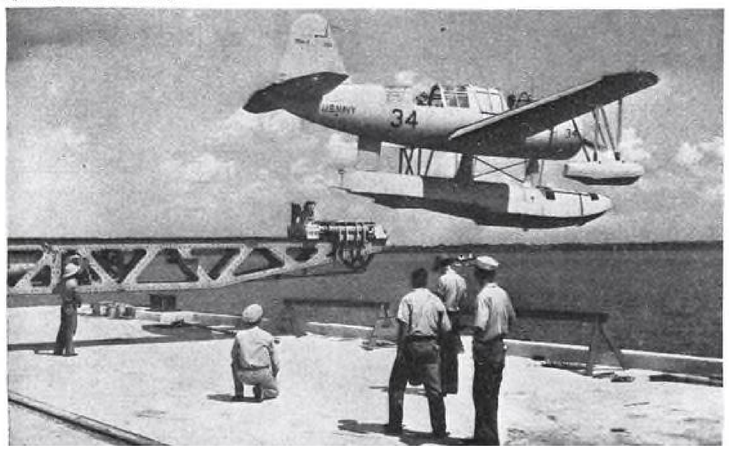

The long arm of the allied navies continues to reach out and spot the enemy with deadly accuracy. The Bismark...the Jap advance on Midway... the operations in the Aleutians...and other unheralded tip-offs are to the credit of Consolidated PBY Catalinas flown by U. S., British, Dutch and Australian airmen.

Flying aboard ships like these are products of this company which go to make up the great Invisible Crew. Radio accessories by Bendix Aviation, Ltd., are at the front on virtually all American aircraft.

BENDIX North Hollywood
SUBSIDIARY OF BENDIX AVIATION CORPORATION

CUSTOMER SERVICE

Bendix Customer Service *is at your service.* This is a plus value that now, more than ever under pressure of war demands, is demonstrating its effectiveness in maintaining peak efficiency. The service is complete — complete engineering to assure the correct application of all equipments — complete facilities for testing the installations — and complete follow-through for the life of the equipments by a factory-and-field organization that guarantees proper maintenance and repair.

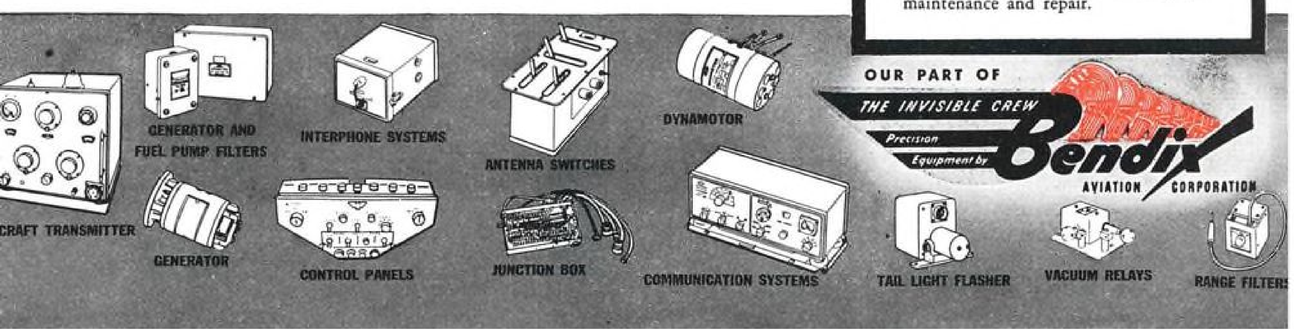

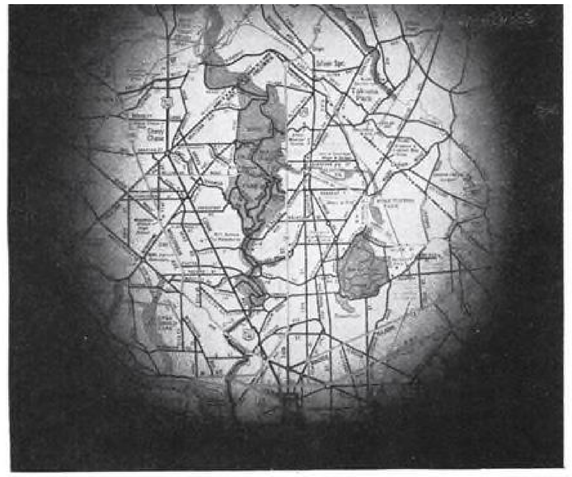

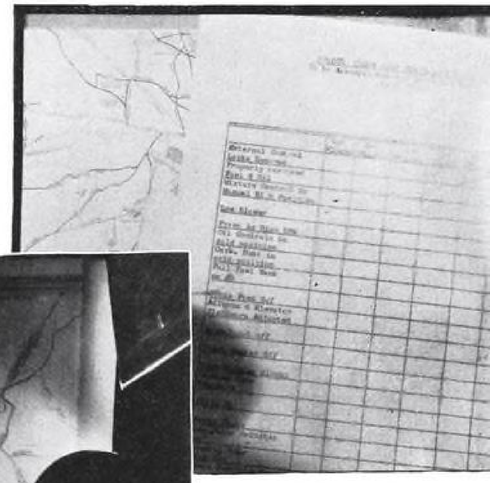

Fluorescent treated plastic "envelopes," together with near-ultraviolet rays, make it possible to read ordinary printed matter such as orders or pilot check charts or maps and photographs without destroying night vision. It also eliminates the need for "blackout quarters" in a plane, since the so-called black light would be invisible to attacking aircraft. Material in the envelopes can also be used under ordinary white light or in daylight, as is shown at right.

Black Light For Night Flight

Near-ultraviolet ray unit designed to protect night adaptation of bomber crews with flexibility essential to efficient operation.

THE PROBLEM OF MAINTAINING night vision of bomber crews while still permitting them to read and write orders, study maps, photographs or other printed material appears headed for solution through new developments in combining near-ultraviolet rays and fluorescent treated transparent plastics in the red end of the spectrum.

Exhaustive tests have shown that from 30 to 45 min. are required to completely adapt eyes to cone vision in darkness, but that only a flash of white, or ordinary light, can destroy the adaptation. Thus a bombardier, trying to study photographs to check landmarks during the approach to the objective must avoid the use of white light. Similarly, a navigator attempting to study maps or to make last-minute computations to bring the plane over its objective is at a distinct disadvantage if it becomes necessary to man a gun against defending fighter aircraft.

Thus far the use of black light fluorescent rays has been largely confined to illumination of instrument panels. Recently, however, a further step has been taken by J. M. Gordon, fluorescent and luminescent products consultant. He has developed transparent plastic "envelopes" in which ordinary printed matter, maps or photographs may be read by black light. Carrying the step to its logical conclusion, Gordon has developed lightweight portable lamps which can be placed on a navigator's table or which could be placed on the forehead as are miner's lamps.

In operation the unit, producing a low intensity of unseen near-ultra-violet light directed over an orange-red fluorescent treated transparent plastic, emits a minimum light glow sufficient for vision of descriptive material under the plastic surface. The glow is produced by bombardment of invisible near - ultraviolet shortwave impulses in the 3,600 angstrom unit range which accelerate molecular surface tension of the fluorescent material into longer wave length energy, re-emitted as visible light, in the 4,000 angstrom unit range.

The Gordon portable unit, comprised of a self contained 2½-w. near-ultraviolet light source or the 4-w. 24-28 v. black light source standardized by both the Army and Navy, when placed 5 in. above the fluorescent surface will permit vision over a 36-sq.in. area.

The "envelopes" employed by the Gordon process can be used either to hold —and make visible—charts, orders, photographs or maps or penciled messages can be written directly on them and erased later for re-use. Provisions for use of the Gordon envelopes have been designed into a new bomber, production for which is under way, and are currently being used by the Signal Corps. The envelopes can be made up in practically any size desired—from small card holders through standard letterhead size up to map or chart cases, and for plotting operations.

Developing Wider Cargo Markets

Photos courtesy Pan American Airways

Vastly increased movement of both cargo and passengers due to wartime pressure is giving America's airlines a vast wealth of "know-how" which will be invaluable for postwar developments. Nevertheless "selling the service"—on which they have done an excellent job—will assume greater importance than ever in developing the large cargo business which will be one of the outstanding post-war developments.

Postwar growth of "Airex" commodity list presents a series of merchandising problems involving both designer and operator to give air transport a dominant position.

By ROBERT K. KINZEL

PRIOR TO PEARL HARBOR the true large-scale movement of cargo by air was still in the realm of the future. It is true, of course, that the airlines had made a start in this direction through a sound gradual development. It is also true that several outstanding jobs on heavy cargo movement had been developed such as transporting mining machinery into the Andes, Alaska and other remote regions, and hauling chicle from Guatamalan jungles.

But aside from these special geographic conditions, the railroads, trucks and steamships had been virtually unchallenged, as is shown by the fact that the domestic airlines in 1940 moved less than 1 percent of the total air express business of approximately $200,000,000 in the United States, not including the large volume of express moved by truck.

Dec. 7 was the start of a new era, because from that day many heretofore unsolved air freight traffic problems disappeared. There was only one thought —how much can be moved by air and how fast can we get it there. Cost, convenience of shipping, ground handling and other questions were put aside. The government immediately started large movement of urgently needed goods. Steamer space became scarce, war risk insurance premium rates rose and there was always the hazard of badly needed merchandise being sunk.

This radical change ended the period of gradual and progressive increase of commercial business which the airlines had been enjoying, but it gave them advantages which more than compensated for this loss. Commercial business which was lost was only temporary and will come back in greater volume after the war.

In the meantime the airlines are acquiring in a short period of time a wealth of experience in the mechanics of flying freight, not only in the United States but throughout the world. Personnel is being trained in all phases from ground handling, routing and loading to accounting. Cost figures of actual operations are being assembled. That all essential "know how" is being obtained without the usual business risks. No one has to guess whether or not business can be obtained, no one has to estimate costs, to shave prices to meet competition. The end of the war will see the airlines with a large reserve of experienced personnel available. Cargo planes should be abundant and the manufacturers will be vying with one another to produce even more efficient planes.

Despite many predictions arising from the recent cargo plane controversy, which generated more heat than light, the airplane will not put the steamship, railroad and truck out of business. Air men are generally agreed that heavy freight such as coal, grains, cattle, steel and ores are not to be considered yet—and that "yet" is important because we are already hearing predictions of "flying boxcars," "air trains" and "freighters with wings."

A new word has been needed to define the type of shipment which will travel by air tomorrow. "Air freight" is a misnomer. Rather let us call it *Airex*, because the nature of the shipments by air in the future is still somewhat of an unknown quantity. It will, however, embrace a large and heterogeneous group of commodities moving at air speed which previously moved, sometimes by express, sometimes as LCL and even sometimes as carload or steamer freight tonnage. It must include products to and from new markets which could not be tapped by surface transportation. Although not along the lines customarily known today as freight, aircraft will move a large group of commodities in ever increasing volume—in volume perhaps larger than the more voluble boosters of "air freight" believe possible.

Further discussion of the problems determining the scope of *Airex* shipments can be best presented against a brief review of the experience to date. The air express business built up before the war was definitely limited to a few commodity groups because of the transportation cost, which averaged 80c. per ton-mile in the United States and slightly more in international trade. Foremost of these groups comprised perishables such as news, newsreels, advertising material, flowers, biologicals and some style articles such as women's clothing. The second group included machinery replacement parts which were urgently needed and for which the transportation costs were unimportant compared with payroll and production losses. Thousands of dollars could be saved by getting a repair part to a closed plant in Buenos Aires in a few days instead of in a few weeks.

Third came samples and duplicate papers which could be moved with little or no loss in time as compared with airmail, but with large savings in cost. One manufacturer of neckties regularly sent silk samples all over South America and across the Pacific as far as the Philippines and Singapore. By this method he was able to get his foreign orders in time to manufacture them at the same time as his domestic ties, resulting in a saving of many times the cost of air transport. An additional advantage, he reported, was the fact that his air express packages got prompt attention from the buyers, giving him an advantage over competitors who used surface transportation.

The fourth, or miscellaneous, group included many emergency items ranging all the way from false teeth and eye glasses to such things as an asbestos suit needed to put out an oil well fire.

The steady, healthy increase in the amount of air express carried each year was the result of good management and improved operations through which more and more shippers became aware of the service. There were many in the industry, however, who were convinced that this high-priced, super-speed service would continue to be restricted to a negligible portion of the available ex-

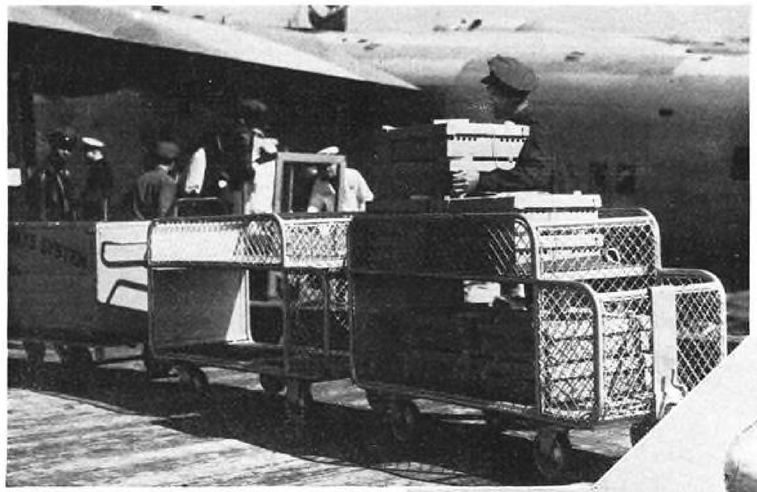

As "Airex" commodity shipments gain in size and volume new types of cargo handling equipment will be needed to meet varied requirements imposed by geographic conditions. The greatest possible degree of standardization will be necessary for utmost efficiency.

Use of land-based aircraft in international trade —already given tremendous impetus by exigencies of the war—means not only vast savings in time, but in the amount of handling between point of origin and destination. These savings can be converted into dollars and cents to help bring air cargo costs down to competitive levels.

press business—to say nothing of freight—unless costs were radically reduced and an efficient system of ground handling and transfer was set up.

Although employing a new medium, the movement of goods by air can and must be considered a series of merchandising problems, of which the first is price, unless the factor of heavy government subsidy enters the picture. Just as the automobile was a vehicle for the few when its price was in thousands of dollars, so the airplane remains a vehicle for the smallest percentage of shippers while its ton-mile cost remains about four times as high as its nearest competitor—express by rail or truck.

As in any other merchandising problem it is axiomatic that the lower the cost the larger will be the volume. The present transportation price-volume structure can be generally compared to a pyramid, with today's air express rate of 80c. a ton-mile at the apex. Farther down but with greater volume is rail and truck express averaging slightly under a 22c. per ton-mile cost from whence the pyramid broadens to a base of carload freight and steamer tonnage, ranging from 5c. to less than 1c. per ton-mile.

Such a picture readily points the way to the initial postwar step in air cargo transportation. At first glance this might seem a formidable step—to lower rates sufficiently to compete with services whose charges are one-quarter or less of present day air transport charges. But such a reduction is not a matter for visionary speculation as

Already air transportation has made great progress in expanding its cargo activities beyond the highly publicized emergency and luxury shipments. In Colombia, for example, today's regular tariff rate includes items ranging from fresh vegetables through jerked beef to school textbooks.

The airlines need not be content with merely attempting to get a large portion of the world's express business, the author believes, since there are several factors which, with proper commodity analysis, will enable them to carry everyday necessities now moving by other means.

Air Transport

something possible, say in 20 years. It is a distinct possibility to be put into effect as soon after the war as commercial aviation, as such, is resumed.

It is within the realm of possibility, using today's equipment, to come within a few cents per ton-mile of current rail or truck express rates. This is shown by the fact that cargo planes have been built—and are in service—which can be operated for approximately 5c. per ton-mile of payload, and on which a conservative 100 percent can be added for overhead, which includes interest on investment, administration and ground maintenance. Naturally, overhead will not increase in proportion to volume of goods carried. Again, conservatively figure on but a 70 percent load factor and the operating and overhead costs total about 14c. per ton-mile, to which must be added pickup and delivery costs. These latter costs, to be discussed in more detail later, will vary with the amount of service rendered, but it is not unreasonable—on the basis of previous experience—to assume that they will not exceed 10c. per ton-mile. One basis for such a conclusion is the fact that express pickup and delivery is rendered by both railroads and trucks as part of their service whose over-all cost to the shipper is 22c. or less per ton-mile.

Rate Structure

Even though the airlines will be in a position to compete for the express business they face a huge problem in setting up a rate structure. Large international airlines will have many more ports of call than a steamship company has, and in the United States the stops will be comparable to our railroad system. The complicated railroad and steamship structure, about which many books have been written, has been slowly worked out over a period of years through trial and error, convenience, necessity and competition. However, the airlines, even though they borrow many parts of the theory from other means of transportation, must establish their own structure based on the cardinal principals of mileage flown, equipment used, nature of terrain, estimated percent of payload capacity, and competition, the first three being determining factors in cost of operation.

Using the above principles, and by diligent study of the voluminous rail and steamer tariffs, a basic rate struc-

(*Turn to page* 305)

There's only ONE order in this shop..

Win the War! 24 hours a day, 7 days a week, the story at Interstate's Precision Plant is the same: keep 'em moving!

Here is one of the most complete precision machine plants in the country. From it flows an endless stream of vital aircraft units for America's Air Armada.

Here a competent staff of specialized engineers design and test new, important units to improve the fighting qualities of our warplanes... by making these units lighter, more compact, easier to assemble and to service. Here are manufactured thousands of bomb shackles, mechanical and hydraulic machine gun and cannon chargers and all types of hydraulic actuating equipment... from the smallest valve to the largest landing gear mechanisms.

The roster of aircraft manufacturers served by Interstate extends from Coast to Coast... and in ever-increasing volume. But when you sum it all up, there's only ONE order in this shop ...WIN THE WAR!

Interstate

AIRCRAFT AND ENGINEERING CORPORATION

EL SEGUNDO, CALIFORNIA

THE MOST UP-TO-DATE BUSINESS IN THE WORLD

The men who made American Aviation the most up-to-date industry in the world did so by sponsoring changes and keeping an open mind to fresh points of view. They have a full-time war job today insuring the nation's safety and future.

The impact of war makes more essential than ever day-to-day analysis by competent men. Recently, Congress has reduced some taxes, raised others. Price controls and income ceilings are now law. To do the utmost to safeguard capital and savings from possible inflation and taxes, the service of experts who make the protection of savings their full-time job is required.

The partners of E. F. Hutton & Company invite correspondence from those who wish to consider a new point of view. Our analysis of market influences and investment policies will add something to investment thinking that will hold your interest.

E. F. Hutton & Company, since 1904, has served a satisfied clientele and has built its business into one of the largest and strongest of its kind.

E. F. HUTTON & COMPANY

MEMBERS OF THE NEW YORK STOCK EXCHANGE

NEW YORK CITY
SIXTY-ONE BROADWAY

Ruloff E. Cutten — *Theodore A. Lauer* — *Gerald M. Loeb*
Joseph E. Swan — *Sylvan C. Coleman* — *George B. Wagstaff*
Travis M. Fewell — *Lawrence McK. Miller* — *Theodore Weicker, Jr.*
George Kantzler — *Edward F. Hutton (Spl.)* — *Warren H. Spurge (Spl.)*

LOS ANGELES
623 SOUTH SPRING STREET
Gordon B. Crary
Allan H. Crary

SAN FRANCISCO
160 MONTGOMERY STREET
Dean Dillman

Aviation's Future Trends

By SELIG ALTSCHUL

AIR TRANSPORT EQUITIES have reached new highs in popularity recently. This is partly a reflection of the sustained volume operations being experienced by the air carriers and the expectations that record earnings will be established this year. The greater impetus to rising prices for airline stocks, however, is found in the glowing projections which have become so popularly associated with the industry's future.

Examining the short-term outlook, it appears fairly certain by now that the domestic air carriers will handle almost as much, if not more, commercial business for 1942 than they did a year ago —despite operating with about only one-half the number of planes the greater part of the year as were formerly available.

Sustained and heavy volume in all departments—passenger, mail and express—permitted intensive utilization of available equipment and made for profitable operations. Earnings have have been further bolstered by the elimination of the special discounts on scrip and round-trips. "Other income" from war work will also be a major factor in 1942 earnings' reports. In the aggregate, it seems reasonable to assume, in the absence of complete interim reports due to military censorship, that the domestic air carriers will exceed 1941's net earnings of about $3,600,000 by a wide margin and surpass the previous record profits of $4,250,000 shown for 1940.

Future Being Discounted

It is more than current earnings, however, which are responsible for air transport securities establishing new highs for the year and displaying the best market performance among the various groups. (See accompanying averages and chart.) Many investors and speculators are trying to peer beyond the present and profess to see a tremendous expansion in commercial aviation in the postwar period.

There can be no denying that the airlines will experience a major growth trend and submit to an enormous increase in volume of business. However, translating this volume to net earnings remains to be seen.

The case history of the electric power industry clearly reveals that a substantial increase in volume operations does not necessarily carry through to net income. The electric utilities are highly comparable to the airlines. Strong growth trends are characteristics of the two groups. Both industries are vested with a heavy public interest and are regulated by federal agencies.

According to the Federal Power Commission, the output of electric power more than doubled from 82.3 billion kwh. in 1932 to 168 billion kwh. in 1941. At the same time, a compilation of virtually all of the country's electric utility companies shows that net earnings available for dividends amounted to about $317,000,000 for 1932 and declined to $303,000,000 in 1941. In other words, during this ten year period, while volume more than doubled, net earnings actually declined.

Why this decline in profits in the face of such a substantial gain in volume? It is true higher operating costs and increased taxes were factors, but the major elements responsible were the consistent reduction in rates charged the public for electric power.

(*Turn to page* 302)

TABLE I—NET WORTH AND RETURN ON CAPITAL

Five Major Airlines

	Net Worth Dec. 31, 1941	Net Worth Per Common Share Dec. 31, 1941	10% Return Per Common Share 1941	Actual 1941 Earnings Per Share
American	$15,308,008	$18.00	$1.80	$3.93
Eastern	10,707,244	18.70	1.87	2.81
Northwest (a)	2,318,848	8.79	.88	1.83
TWA	7,741,730	8.12	.81	.51 (b)
United	14,027,719	9.33	.93	.40

Notes: (a) For year ended June 30, 1942.
(b) Deficit.

BARRON'S STOCK AVERAGES

	Aircraft	Air Transport	50 Stocks
Oct. 30, 1942	32.20	24.09	66
Oct. 23, 1942	32.95	24.97*	66
Oct. 16, 1942	32.38	23.13	64
Oct. 9, 1942	32.95	23.25	65
Oct. 31, 1941	36.30	23.03	68

* New high for year.

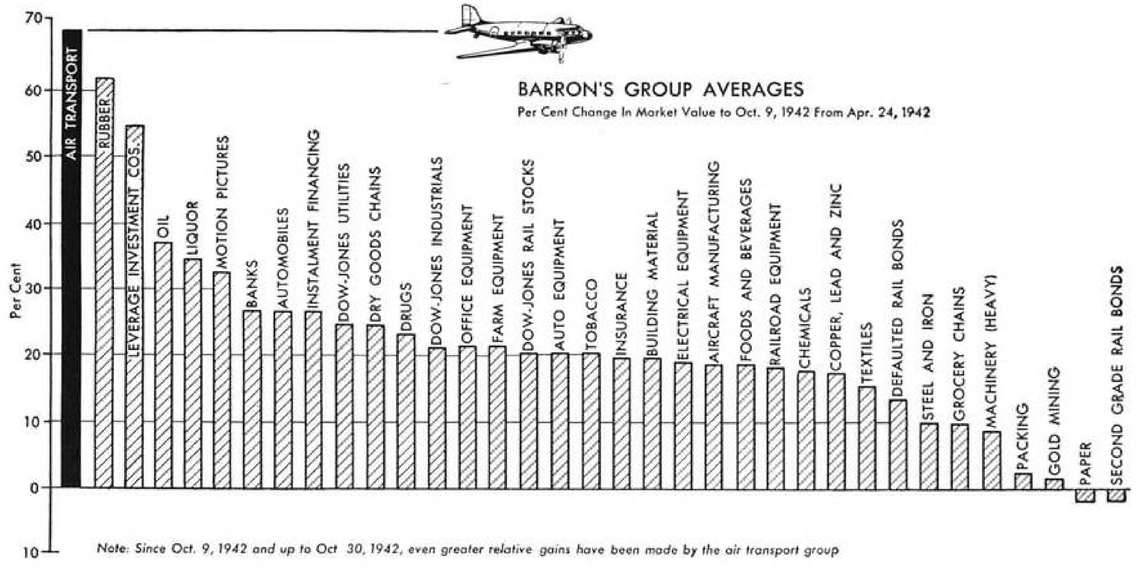

CIVIL AIR PATROL COMPLETES YEAR OF SERVICE

Volunteer "Flying Minute Men" aid Army and Navy on coastal submarine patrol; civilian organization expanding courier service with private planes.

By MAJ. EARLE L. JOHNSON, *National Commander*

ONLY A YEAR AGO, Civil Air Patrol came into being through the desire of the civil airmen of the country, as the first orders read, to be utilized with their equipment in the war effort. From its formation a week before Pearl Harbor and from the first meeting of its 48 Wing Commanders, ready to drop what they were doing and pitch in to get this movement rolling, America's fleet of puddlejumper planes has had a wide variety of work to do on a continually increasing scale.

Today, the Wings of Civil Air Patrol in every state, almost without exception, are better organized and more active than at any time since the beginning. Under the Wing Commands, more than 65,000 civilian volunteers have enrolled in the Squadrons and Flights at more than 1,000 airports in all parts of the country.

The first period of CAP development was one of organization and training to band together the private pilots, who flew before as individuals, into hard-hitting units, ready for any type of mission which light planes are capable of flying. The second step was to set up a series of CAP Coastal Patrols; to man and equip them on a volunteer basis, on constant watch for enemy submarines along our shores. The third phase, now well advanced, is to develop inland missions so that qualified flyers in every area may be able to spend as much time as they can devote to the Patrol on useful wartime missions.

At the beginning, each local unit stood as an aerial home guard, drilling and practicing for the attack all hoped would never come. Most of the State Guard aviation units were disbanded and merged with the Patrol because of the greater flexibility of the national organization in performing missions regardless of state lines. Close cooperation had been maintained with the ground services in the states and with the protective units of the Office of Civilian Defense, of which CAP is a division.

But the Patrol soon had the good fortune to be assigned also to active missions for which men and planes were detached from their local Squadrons for service at CAP coastal bases and courier stations. Thousands of members who were in a position to volunteer 30 days or more continuous service in a year have gone on CAP active duty and many more are waiting their turn. The nation-wide character of the Patrol is indicated by the fact that members from more than 40 states are now on active assignments.

The most spectacular work is on the Coastal Patrol which began to operate early in the year when the Axis was taking heavy toll of American tankers and merchant vessels on the vital supply routes along our shores. In the words of Major Gen. Follett Bradley, these "Flying Minute Men" brought their own planes, repair tools, radios, and other equipment to fly under military discipline like well-organized football teams. Submarines spotted by CAP have been sunk, Gen. Bradley revealed. Others about to attack vessels have crash dived on the approach of CAP planes. Vessels in distress have been reported and hundreds of survivors of torpedoings have been located for rescue by surface vessels.

This work is done under the command of CAP's own volunteer officers under the general supervision of the Army Air Forces. Most of the men are ineligible for military service. Many

On its first birthday the Civil Air Patrol boasts more than 65,000 members organized into Squadrons and Flights at more than 1,000 airports throughout the country. Military drill is a fundamental part of all its training as is shown by these typical Squadrons. Here, part of the personnel and equipment of the Norwood, Mass., Squadron and below, a unit at Lambert St. Louis Field stand inspection.

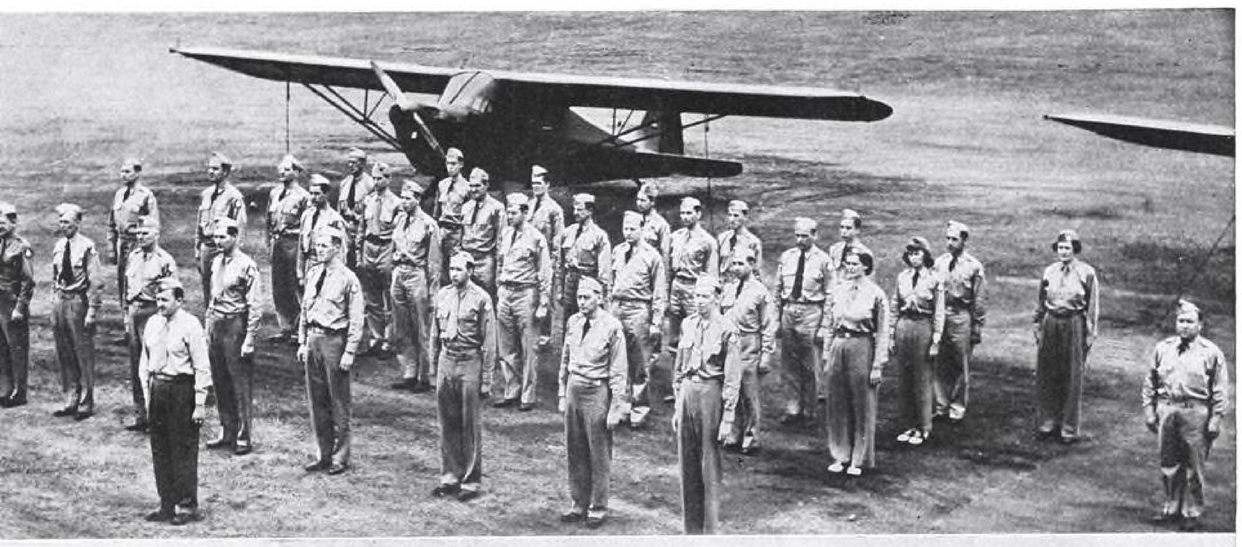

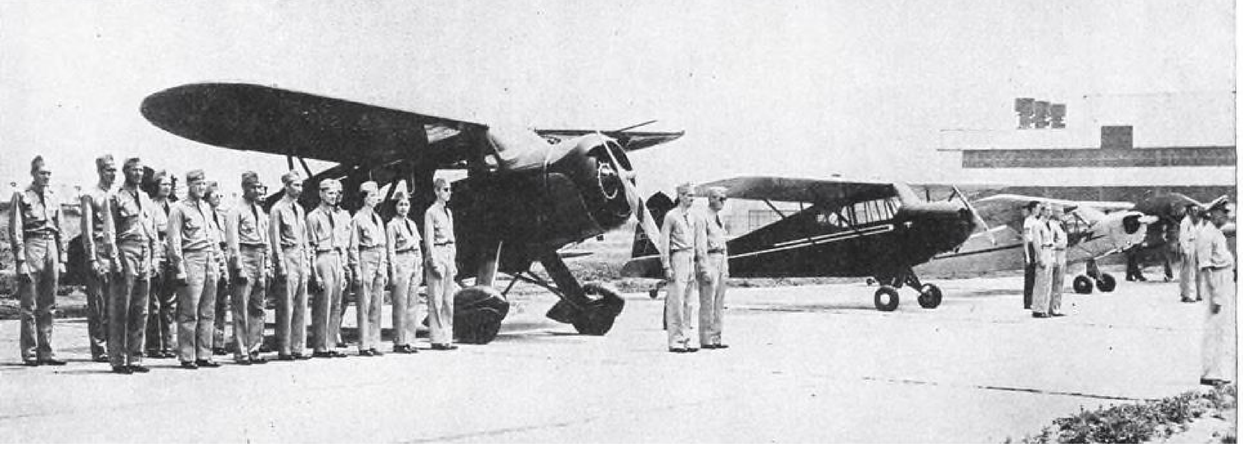

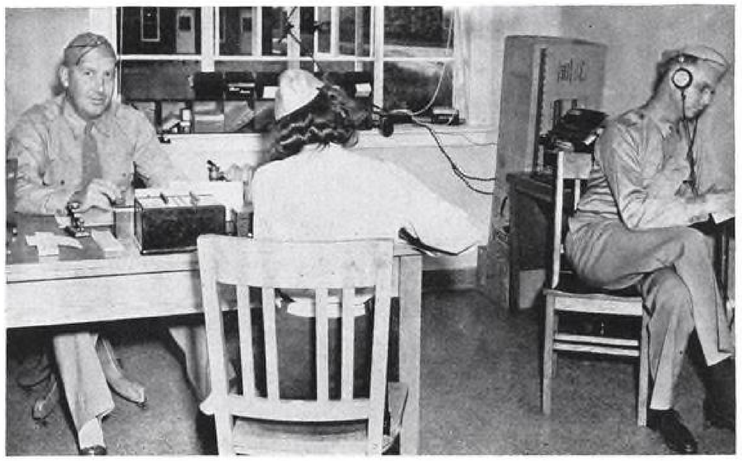

Coastal patrol, in which CAP's members free Army and Navy pilots and planes for other work, is one of the most important of the year-old civilian organization's duties. Many of the volunteers serving as pilots, observers or ground crewmen have completely given up their peacetime lines of business to go on active duty "for the duration." Here is an operations office at a base "somewhere on the East Coast" where both men and women members from the Maine Wing take their tours of duty.

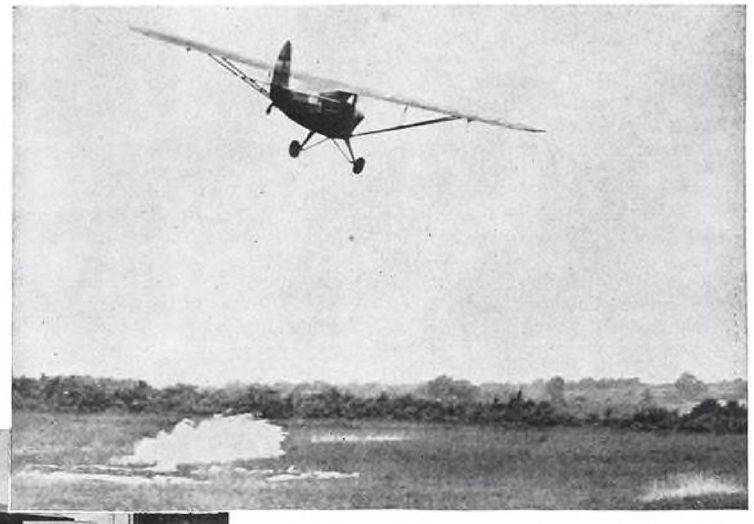

ABOVE: Civil Air Patrol pilots have aided both civilian defense groups and the armed forces in many ways. Air raid warning systems, blackout regulations, and simulated bombings have helped train civilian defense workers, while Army Air Forces have used CAP pilots and planes for courier service.

LEFT: Some ingenious devices have been born of necessity and built by CAP members. There is, for example, the office and radio control trailer built by the Michigan Wing which recently dedicated its own airport, "Wings Field," built by CAP members themselves.

were flyers in the last war, too old now to be fighter pilots on hot ships but still keen eyed and steady at the controls, proud to be able to help the work of the Army by flying in their country's service. They are proud of the bases they have developed through their own labor and ingenuity, working just for expense money with a moderate per diem to cover their living and equipment costs and a moderate hourly rental for their planes when in the air. That is the way they want it. It is the volunteer spirit which has made the whole enterprise carry on with the enthusiasm and economy that it has.

Men from all walks of life and of all ages from teen-age youngsters to grandfathers are living and working and flying together with perfect teamwork. Time and again, a member who thought he was coming for only a few weeks has gone back home only to wind up his business and return for the duration, unwilling to miss a day in the biggest game hunt that civilians are privileged to join.

Courier service for the Army—the flying of officers, dispatches, and rush shipments between military posts—is beginning to approach the Coastal Patrol in magnitude and is likely to surpass it. While planes with upwards of 90 hp. are needed on the coast, the lighter aircraft—of which there are still many thousands in airworthy condition—are flying the inland missions.

In the Pacific Northwest, thousands of miles per day are being flown on regular routes and schedules. Similar service is developing over wide areas. Courier stations have been set up also for war industries, especially in Pennsylvania and other Eastern states, and are spreading into other areas. Just a few days ago, an entire production line was tied up for lack of 16 lb. of special parts. A CAP plane brought the shipment in a few hours and production was resumed. This sort of thing has happened again and again, on top of the every-day routine work.

Other active missions include aerial target towing, reconnaissance and inspection flights, searchlight and gunnery tracking, and mock strafing of ground troops in training. Forest patrol missions have been flown in many states for the U.S. Forest Service, sometimes on instruments over the smoke of big fires. In cooperation with civilian defense, mock air raids, blackout observations, and tests of the aircraft warning system are almost a daily occurrence. Local units put their practice missions into practical use by such work as scouting for junk piles containing precious salvage metal.

To draw crowds for bond rallies and recruitment drives, the little civil airplane can substitute for the bombers which are needed elsewhere. To the people these home-town planes symbolize protecting wings in the sky and, in view of what they are doing on the coast, they are a good deal more than symbolic. In natural disasters such as floods and tornadoes, the local units have turned out for rescue flights, carrying medical supplies, and guard duty demonstrating their alertness for war emergency.

The members not on active duty are simulating actual wartime assignments in their intensive practice program. Although CAP is not a flight training corps, its study courses and practice missions result in the advancement of those who were pilots when the program began and has encouraged many to take lessons and learn to fly. Thousands have gone out of the Patrol into the armed services, the Air Transport Command, the airlines, and the pilot training schools better prepared by reason of their CAP experience.

The basic CAP course begins with 81 hr. of military drill, discipline, and defense subjects. The 150-hr. advanced course goes on to meteorology, air navigation, crash procedure, and detailed flying missions. As the training is now shaping up, each member will be required to take all the ground work necessary for a private pilot's license and a good deal more besides.

The units out in the field are highly versatile in developing new activities far beyond anything that the staff in Washington could think up. We swap these ideas around among the Wings and if one unit develops a plan that is good, the rest quickly follow suit. Each unit has its staff of officers with specialized functions such as operations, medical, intelligence, communications, photographic, and transportation. Thus these outfits are self-contained with the talent and the equipment to carry out all sorts of missions with no outside help. About a third of the members are pilots; a third student pilots; and rest with related skills such as mechanics, radio technicians, photographers, auxiliary workers, and ground crews. About 10 percent of the members are women, equally eligible with the men and doing a grand job.

Paralleling the senior organization, the CAP Cadets have been recently formed for a limited number of students in the last two years of senior high school. It is a father and son affair. Each CAP Squadron may form a counterpart Squadron of CAPC. Each man in CAP may sponsor one young man he thinks is most likely to succeed in aviation and each woman member may sponsor one girl. Thus the Patrol is making a junior copy of itself to run its own affairs under the guidance of seasoned airmen.

In all these ways, the civilian pilots of the country are making themselves more and more useful to the war effort. Thus the home-town interest in aviation is being kept at a high pitch in communities all across the country. Few of us can spend much time thinking about what will happen when the war is over. But when the final audit is made, I am confident that the Patrol will have proven a strong influence in the full-scale development of civilian aviation which will come when we have won peace again.

Organization of the Civil Air Patrol Cadets is the newest venture of CAP. Minnesota's Wing was first to get under way with the group shown here. Under this new program every CAP member may sponsor one outstanding boy or girl in the last two years of high school for training which will fit them for Patrol membership upon reaching the required age limit.

CAP's basic training course embraces 81 hr. of military drill, discipline and defense subjects and its advanced course of 150 hr. embraces navigation, meteorology and detailed flying missions. Many Squadrons, however, add other subjects to their curriculum. Here the Birmingham, Ala., squadron delves into photography to give its members additional knowledge of a vital part in gaining air superiority.

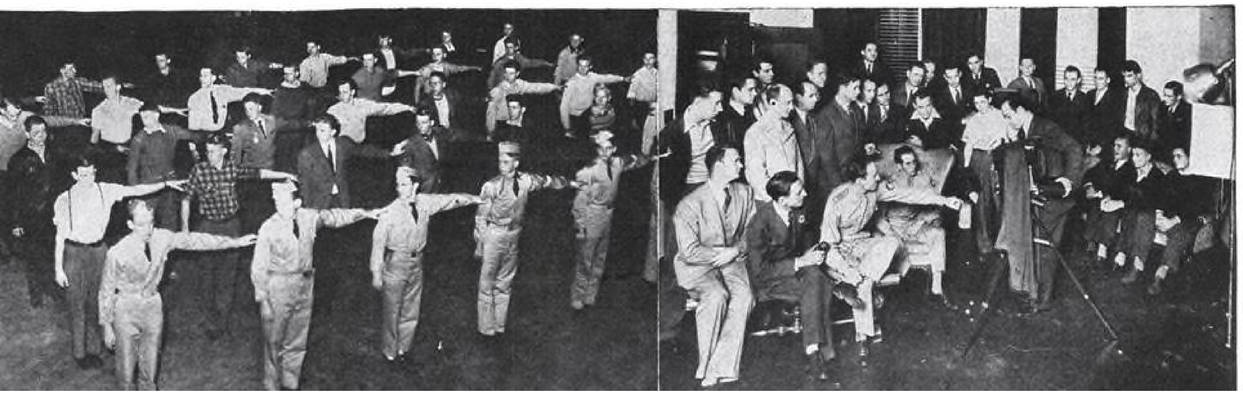

WINS HER CAPTAIN'S BARS

Miss Virginia Combs is the only woman member of the Oklahoma CAP Wing to be commissioned as a Captain, serving as adjutant for the Sooner State's Patrol. Her prompt action in ordering CAP planes in the air during last spring's tornadoes was credited with saving many lives.

ON PATROL . . .

• CAP courier service continues to expand its scope of usefulness to the nation; latest developments come from the Northwest where regular daily schedules are now being flown for the Army, with some flights extending as far away as Utah and the Dakotas, covering territory where the Patrol has heretofore had little opportunity for active duty except for occasional forest patrol and search missions. . . The Indiana Wing has arranged a contract with the Forest Service for patrol flights and planes with pilots and observers have already taken to the air. . . There's no limit to what CAP is called upon to do; in Utah, for instance, a mission located 600 sheep that had strayed into territory that defied ground-bound searching parties. . . The Gary, Ind., Group located 25 mi. of abandoned railroad track and a deserted junk yard. . . Group 514, Cleveland, is conducting a survey on behalf of the Greater Cleveland Civilian Camouflage Committee to check visibility of landmarks in that area. . . Rosters of CAP active-duty missions now carry names of members from no less than 44 states. . . Maj. B. E. Fulton, AEF, long Akron Airport manager and a CAP Group Commander, has been assigned to duty at National Headquarters.

ALONG THE APRON . . .

• The Civil Aeronauties Administration has prepared a pilot flow chart—of considerable value to CPT operators—showing the opportunities in the CPT program and the progress of the trainee through the various courses leading to important, well paying flying jobs now open to many who cannot qualify as combat pilots. . . Meteorological training courses at government expense are to be made available to both men and women applicants, the CAA has announced. The courses, leading to positions as junior meteorologists with the U.S. Weather Bureau or Army or Navy commissions, will be given at five leading universities. Applicants must be college graduates or seniors, between 20 and 30 years of age, able to pass the CAA physical examination, have passed one year of differential and integral calculus and one year of college physics. Before appointment can be made, applicants must have acquired a private pilot's certificate of competency. . .The American Aeronautical Institute of Kansas City has opened a Twin-City Division in St. Paul, completely equipped to train aircraft and engine mechanics as well as aircraft welders and sheet metal workers. The new division is under supervision of K. E. Greenwalt, formerly personnel director at the Kansas City school. . . Abrams School of Aerial Photographic Survey and Interpretation has it second class of 44 Marine officers and enlisted men now undergoing an intensive twelve-weeks training period prior to assignment to active duty. . . United Air Lines has completed a revised edition of its teachers' kit, which was prepared by Prof. W. A. Wheatley. It includes a 52-page illustrated manual, photographs and silhouettes. . . Atlantic Aviation Institute, Inc., has purchased the Luscombe School of Aeronauties.

Civil Operation and Training

Univ. of Texas Expands Aeronautical Training

Dr. M. J. Thompson has been appointed chairman of the newly created Department of Aeronautical Engineering as the University of Texas expands an aviation training program started back in 1926.

Dr. Thompson has studied in Europe as well as the United States and has served as consultant to numerous aircraft and other industrial organizations on problems in applied aerodynamics. He is assisted by Dr. M. V. Barton, formerly of the University of Maryland and Cornell University, where he developed advanced engineering courses for Bell and Curtiss-Wright engineers.

Other staff members include Harry W. Brown, former holder of a Boeing aeronautical engineering scholarship and a member of the Vega engineering staff, and John C. Bowman, formerly with Consolidated Aircraft Corp.

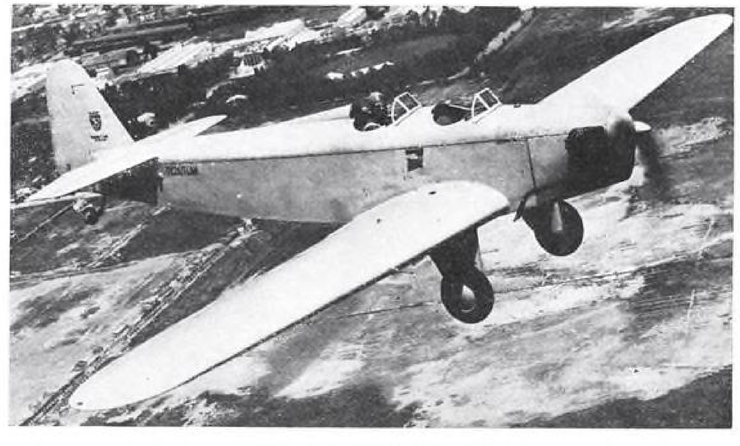

MEXICAN AIR FORCE TRAINER

Reported in large-scale production is the "Tezuitlan" plywood trainer, designed by Antonio Sea and being built under the direction of Gen. Roberto Fierro, Chief of the Mexican Air Force. Powered by a 125-hp. Lycoming engine, the airframe is built almost exclusively of materials native to Mexico. For complete construction and performance details on the "Tezuitlan" see AVIATION, September, 1942, page 227.

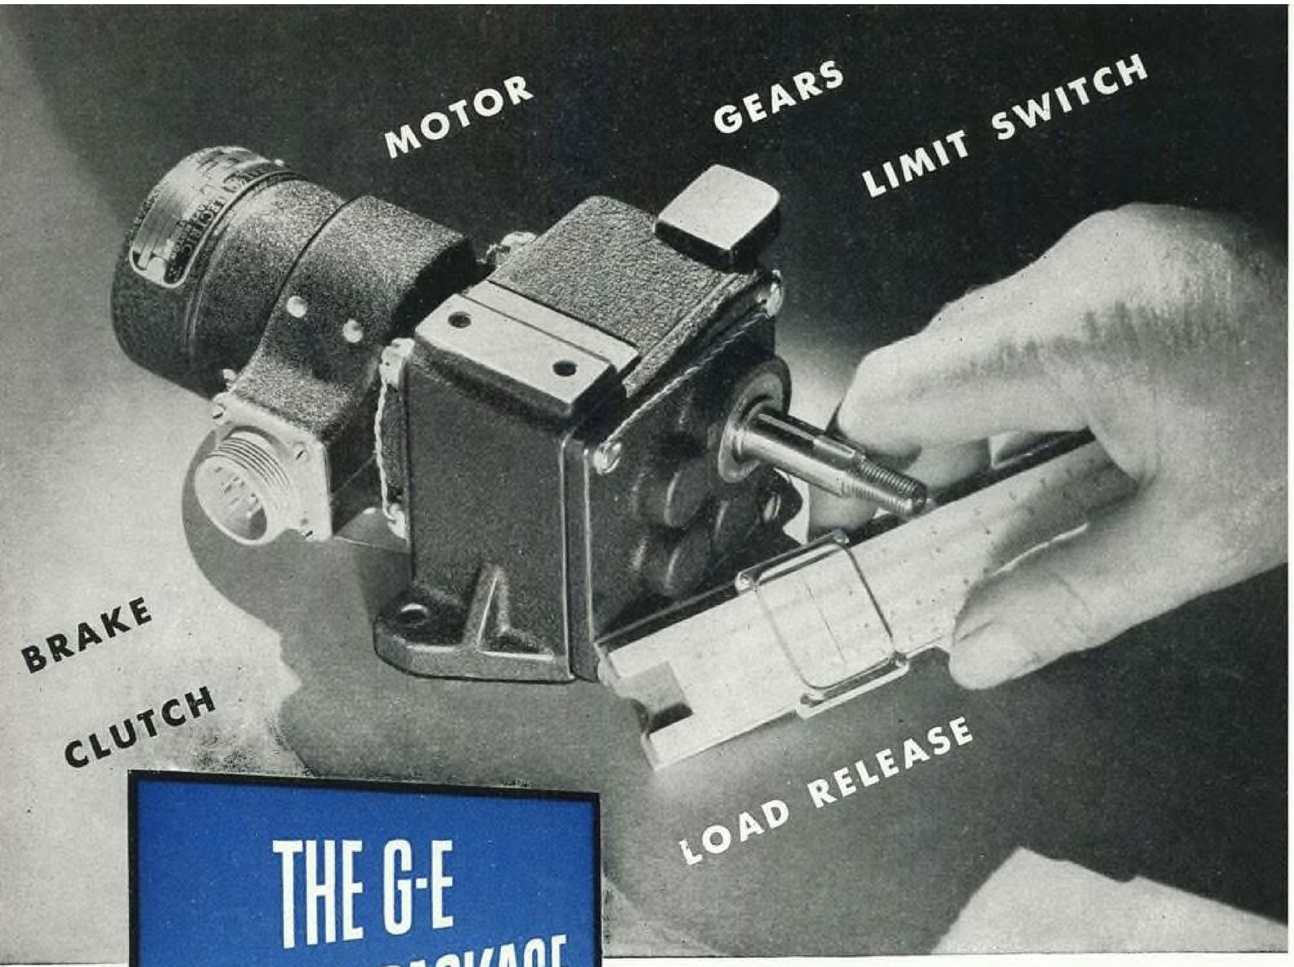

THE G-E POWER PACKAGE *for Aircraft*

A Complete Unit . . . In One Package . . . Shipped Assembled . . . Ready to Install

To simplify plane design and save manufacturing man-hours. All the required devices to do a complete job are built as one compact, light-weight unit—ready for installation on the plane. The designer who uses a G-E "power package" simplifies his job, and gains time because he is relieved of co-ordinating a complete sub-assembly. He also gains space, because this complete unit is designed compactly to meet limited space requirements. Skilled man-hours on the assembly floor are saved, because the power package eliminates sub-assembly time.

And "add more lightness." The G-E power package is lighter than several separate devices that perform the same function. And, being electric, it is operated from an electric power circuit, which is inherently light in weight, and which can be in duplicate for added reliability in combat. This saves over-all weight as compared with other systems offering comparable reliability.

Each power package is fitted to the specific job it is to perform. G-E engineers co-ordinate the motor, gears, control, or other elements required.

When you have a new design under consideration, see the nearest G-E office about obtaining sample power packages for test. Although General Electric factories are now working at full tilt to satisfy the demand for aircraft motors, we will be glad to work with you on the design of equipment for new planes, and to discuss the production requirements such new equipment will involve. *General Electric, Schenectady, N. Y.*

G-E POWER PACKAGE



SEVERAL FUNCTIONS—ONE UNIT
Including
Motor · Gears · Limit Switch
Brake · Clutch · Load Release

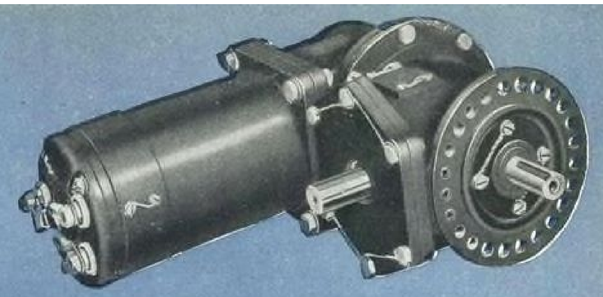

Landing-gear operating power package—consists of motor with built-in magnetic brake, high-efficiency gear reduction, friction clutch on output shaft, and shaft extension for manual operation.

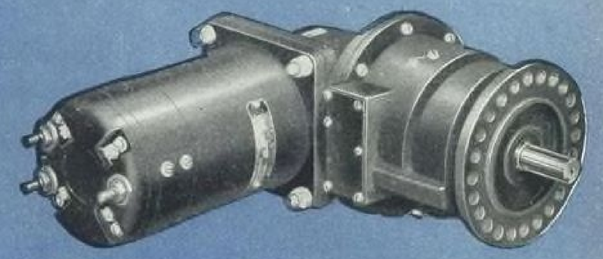

Bomb-door operating power package—consists of motor, high-efficiency gear reduction, with a special clutch on output shaft.

Wing-flap operating power package—consists of motor, magnetic clutch, high-efficiency gear reduction, and friction clutch.

Gears for the above units designed and manufactured by the Pacific Gear Works, Los Angeles, Calif.

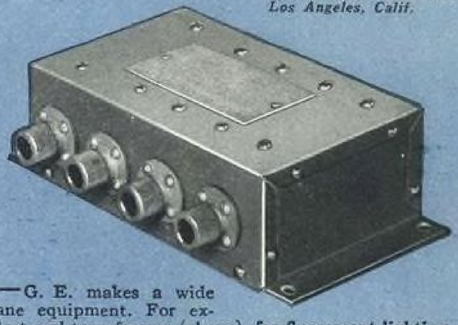

And remember—G. E. makes a wide variety of plane equipment. For example, the ballast and transformer (above), for fluorescent lighting of instruments. Will operate four 4-watt lamps, and provides 3-volt, 10-amp power for indicator and rim lights. Weighs only 1.85 lb. In addition, G. E. makes superchargers, turrets, control devices, generators, voltage regulators, reverse-current cutouts, dynamotors, magnetos, instruments, radio equipment, and a variety of wire, conduit, and switches.

Wing flap operating power package—consists of split-compound-wound motor with special clutch.

Power package for operating control and protective devices—consists of motor and gear reduction.

GENERAL ELECTRIC

700-11-8260

The BMW-801A, as installed in the Dornier 217E, is a complete and compact power unit—its 1,460 bhp. at 2,400 rpm. at 16,250 ft. making it the highest powered German aircooled motor yet put in large-scale production. The 802—said to develop some 2,000 hp.—has only recently been reported to be coming off assembly lines in sizable quantities. But, while the 801 is a compact unit, it is far from a maintenance man's dream, for accessibility has been sacrificed to a large degree. Apparently the German designers have, instead, figured on speed of replacing the entire engine, for removal of the five engine mount bolts serves to disconnect the whole powerplant except for fuel lines and engine recording instruments.

Illustrations courtesy "Flight"

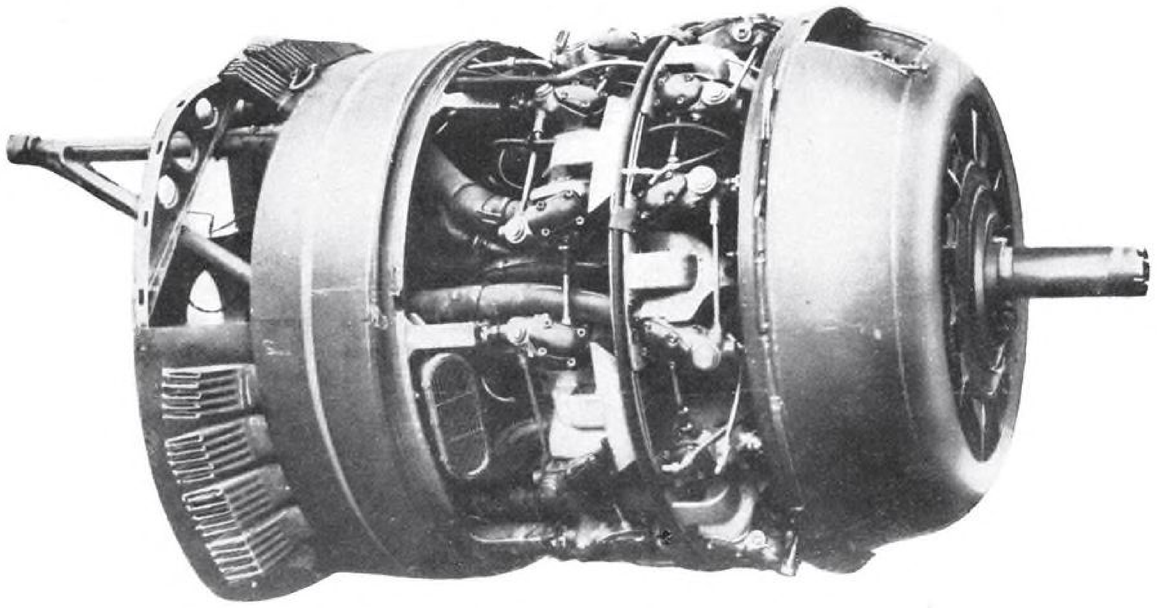

Design Details of the BMW—801A Engine

Second part of a first-hand study by an "Aviation" correspondent, showing additional construction features of a leading German aircooled powerplant.

By MYLES V. CAVE, *"Aviation's" British Correspondent*

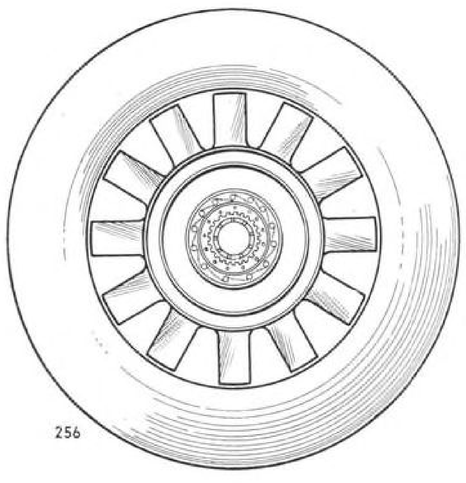



d = Distance of section from center. ∝ = Angle of blade

The extremely close-fitting cowling and the fact that supercharger intakes are located within the cowling have necessitated installation of a cooling fan turning at 1.72 x crankshaft speed located just behind the 13-ft. three-bladed propeller which turns at 0.54 x crankshaft speed. From the fan drive gears is taken the drive for the twin-Bosch ZM 14 magnetos, both of which are mounted vertically on the aluminum alloy front case.

Oil radiator tubes are sealed by the simple process shown here. The threaded end-fitting screws down onto a taper sleever to make a leakproof joint by pinching the tube.

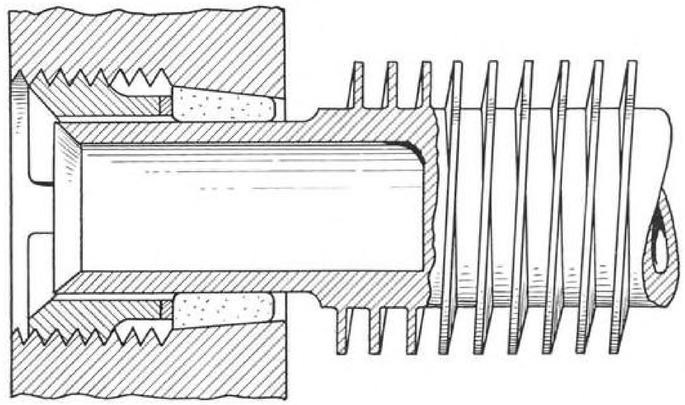

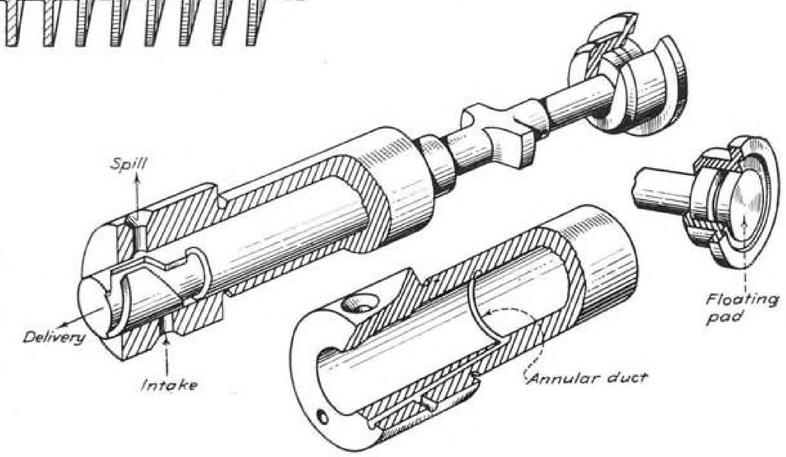

The fuel injection pump for the BMW-801 is the first multiplunger high pressure pump built for production in radial form and, in many respects, the injection system is similar in design to the familiar Bosch Diesel pump. Each plunger head is helically cut and grooved to provide a suitable angle face to the intake and cutoff ports in the sleeve to allow for varying throttle conditions.

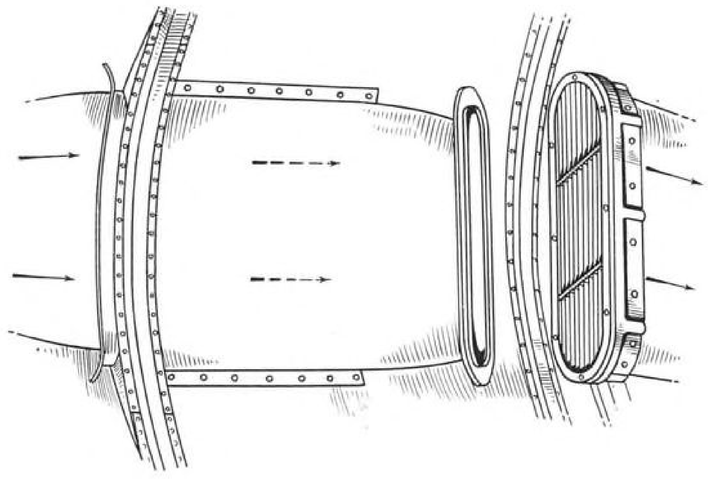

This detail sketch shows one of the supercharger air intakes, set within the cowling. In the photograph opposite the right hand intake can be seen directly behind the mid-lower cylinder and just in front of the rear portion of the cowling. A similar intake is set in a corresponding position on the opposite side. The supercharger operates at 5.05 x crankshaft speed in low gear and 7.46 x crankshaft speed in high gear.

(Continued on page 259)

from BLUEPRINT to BATTLE PLAN

BREEZE Radio Ignition Shielding is being produced today in ever-increasing quantities for the fighting forces of the United Nations on land, on the sea, and in the air. Designed for use on hundreds of different types of engines, this shielding has been developed and perfected by Breeze over a period of many years. Through its wide background of experience, Breeze has acquired unequalled know-how in solving shielding problems. From blueprint stages to actual performance on the world's battlefronts, this Radio Ignition Shielding reflects the high quality of Breeze standards in design and manufacture.

BREEZE MARK

BREEZE CORPORATIONS, INC. · NEWARK, NEW JERSEY

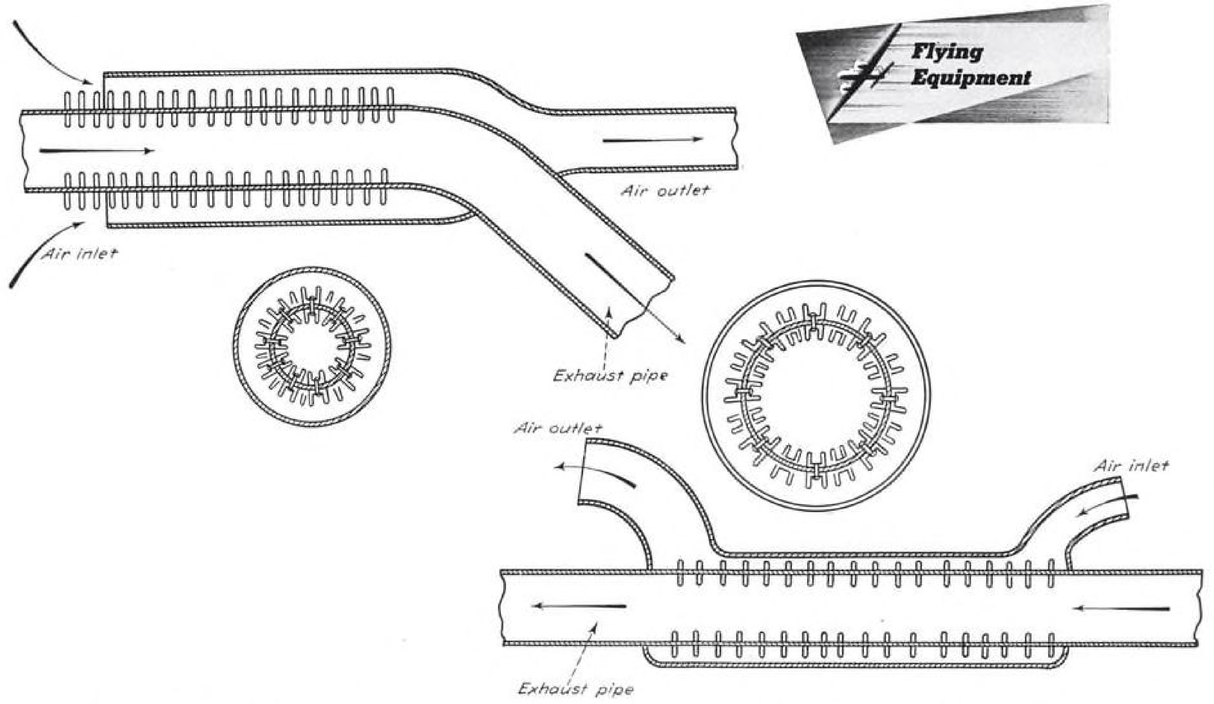

Both wing de-icing and cabin heating are taken care of through utilization of exhaust heat by a system found on American aircraft at least 15 years ago. At top is shown the arrangement for taking heat off for de-icing of wings and bombardier's compartment; Above is the exhaust jacket for heating the main cabin of the DO-217E. (Also see AVIATION, November, 1942, page 228.)

The engine cowling has two pilot-controlled rings for cooling adjustments, one located in the nose and one behind the rear cylinders. The oil radiator is located just behind the nose ring, the cooling air being forced in by the fan and its flow reversed to go through the radiator and out around the cowling. In the Focke-Wulf 190 fighter plane installation, the rear controllable ring is eliminated.

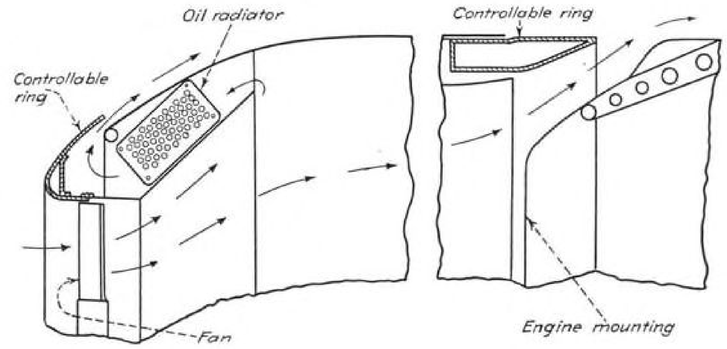

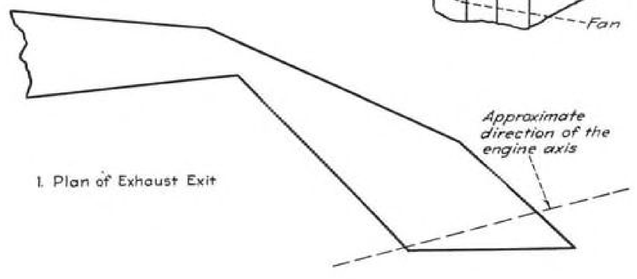

1. Plan of Exhaust Exit

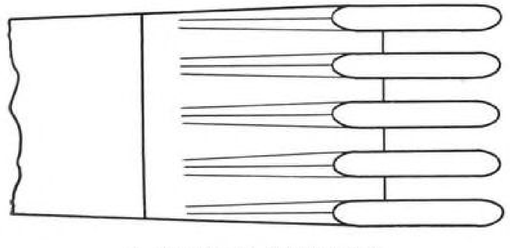

2. Elevation of Exhaust Exit

Exhaust flame damping is accomplished with what appear to be exceptionally short stacks which, as may be seen in the photo on page 256, are grouped at the top of the engine and below the middle on each side. In reality, however, the exhaust pipes have considerable length, since they are inside the cowling well back of the engine the only exposed part being the flame damping exits.

Reconnaissance...VISION...DECISION

When sniper's bullets whip past your head — when you have to send your precious few tanks and men into the teeth of enemy machine gun and artillery fire — that's when good vision counts! When every decision is influenced by *what you see*—your field glasses become an important instrument of warfare.

Military field glasses need more than the ordinary measure of precision in magnification and field of view. Their value is only as great as their light gathering power.

VARD is making lenses, prisms and reticles for our Army and Navy. With skill born of tradition in making precision equipment, VARD technicians work on these optical parts knowing that only *perfection* is *good enough*.

Other VARD divisions produce navigation instruments, aircraft hydraulic parts and actuating units, precision testing equipment and precision tools for machined parts. The hope and earnest effort of VARD management and men together is to give our soldiers, sailors, marines and airmen the tools which can win —tools that are the *best* that can be built — Anywhere.

VARD INC.

PASADENA, CALIFORNIA

The Stinson L-5 "Reliant" has been designed to serve as the eyes of the ground troops, and built to accompany intantry, artillery, cavalry or tank corps wherever they may go into action. Packed with radio equipment, the pilot and observer can maintain communication not only with all types of ground troops, but with other aircraft as well.

Flying Equipment

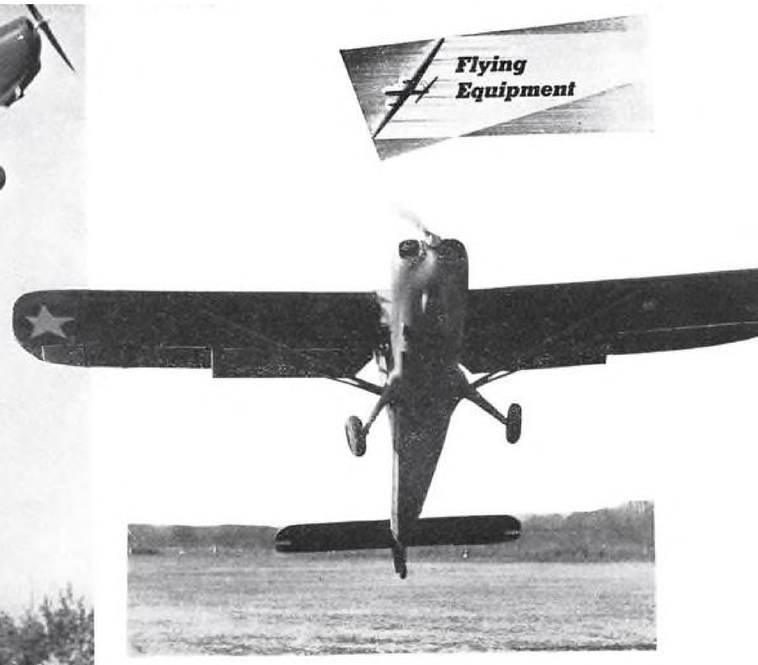

The L-5's 190-hp. Lycoming engine lifts the plane almost vertically after a very short run, a vital feature since the plane must be able to operate from extremely restricted areas in rough terrain. Both slots and flaps are provided to shorten takeoff and landing runs and to give stability for slow observation flying. Said to have an unusually high top speed for planes of this type, the L-5 can be kept in the air at less than 45 mph. for directing troop movements or artillery fire below.

TWO NEW STINSON WARPLANES

L-5 Army liaison plane with wide performance range and AT-19, wartime version of "Reliant," for British navigation training.

DETAILS of two new planes, the L-5 and the AT-19, which have been put in production by the Stinson Division of Vultee Aircraft, Inc., have just been released by the Army Air Forces.

The L-5 *Sentinel* liaison plane is a two-place high wing monoplane which uses 20 percent less steel and 70 percent less aluminum than were called for in original designs. The fuselage is of welded steel tubing, fabric covered, and the wings and tail surfaces are of wood. Designed to operate wherever ground troops are in action, the L-5 has a very short takeoff run and high rate of climb. Since liaison planes must often land on ordinary roads or rough fields, the spring-and-oil shock absorbers have nearly twice the length of stroke of conventional types.

Equipped with both slots and landing flaps, the L-5 is said to have an unusually wide range of speed. For artillery fire-spotting it can be kept in flight at less than 45 mph. Equipment for pilot and observer includes radio units for communication with all types of ground troops as well as other aircraft.

Wing span is 34 ft., length, 24 ft., and weight is 2,100 lb. The L-5 is powered by a 190-hp. horizontally opposed aircooled Lycoming engine.

The AT-19 *Reliant* is being built under AAF direction for assignment to the British as a navigation trainer for British naval flyers. A high, gull-winged craft, the AT-19 is essentially the peacetime *Reliant* but to what extent it has been redesigned, other than the fact that the fuselage has been lengthened, has not been revealed.

The Stinson AT-19 is a wartime version of the well known "Reliant" which is being built under Army Air Forces direction for assignment to England as a navigation trainer for British naval flyers. Extent of the redesigning, other than the fact that the fuselage has been lengthened, has not been released by the AAF.

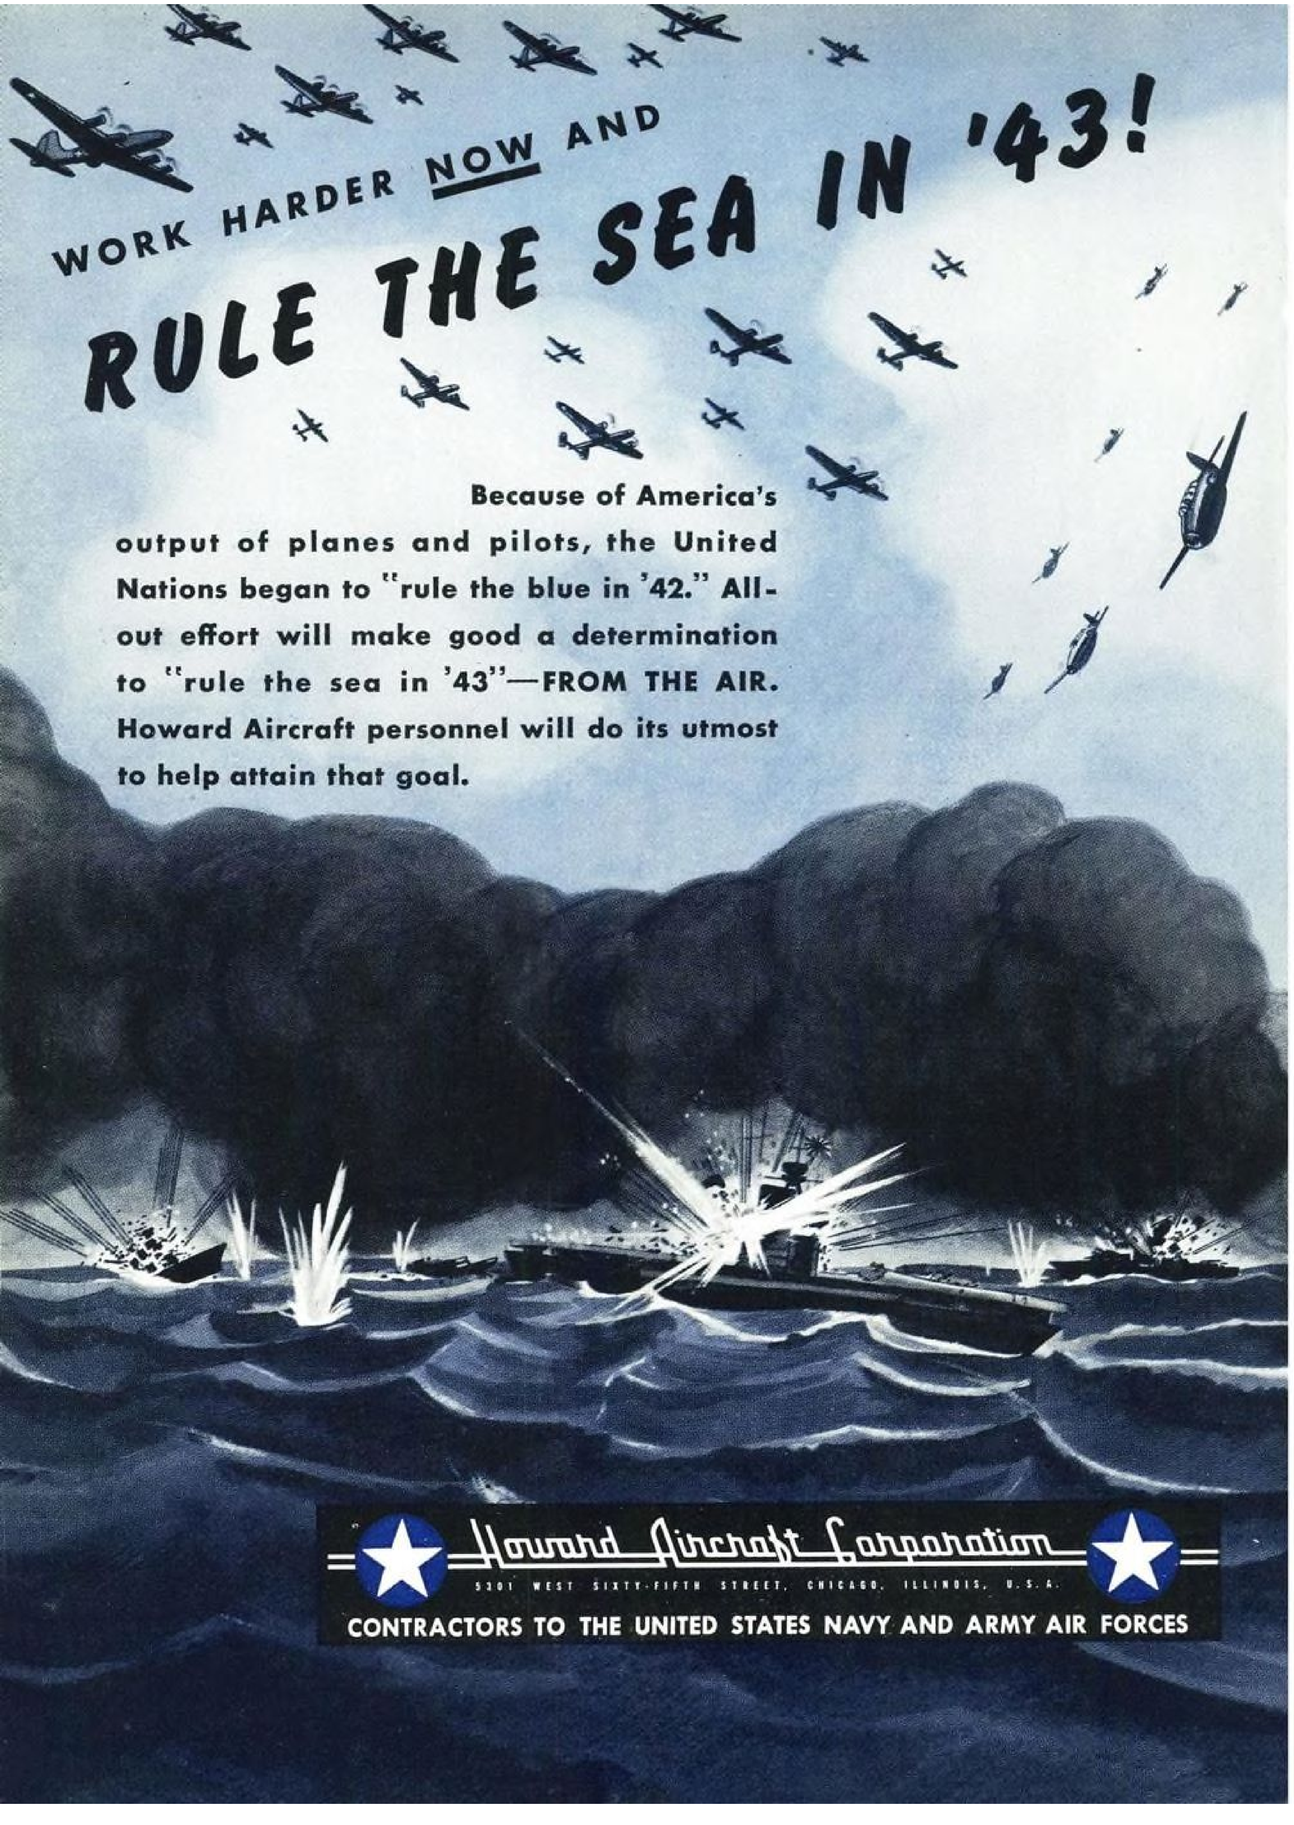

Flying Equipment

Completely equipped to train multi-engine bomber crews as a complete team, the Boeing AT-15 is in reality a small bomber, for it is completely equipped, even to bomb racks. Its two Pratt & Whitney engines give the craft a speed in excess of 200 mph.

The AT-15 crew trainer is so arranged that individual as well as group instruction can be given the advanced students who are in the final stages of their training. Note the navigator's hatch and power-operated gun turret.

BOEING
AT-15 Bomber Crew Trainer

Twin engine advanced trainer develops teamwork of pilot, navigators, bombardiers, gunners and cameramen.

THE BOEING AT-15 advanced crew trainer has been designed to train bomber crews as an integral unit, giving the pilots, co-pilots, bombardiers, navigators and gun crews the coordination and teamwork which is essential to successful operation of the multi-engine bombers with which the Army Air Forces are piling up their amazing combat record. The craft is so arranged that individual as well as group instruction may be given.

Elimination of the use of strategic materials such as aluminum castings and alloys was a prime consideration in the design of the plane. The fuselage is of welded steel tubing construction, wood-faired and fabric covered, while wings and tail surfaces are plywood covered. The AT-15 has a wing span of 59 ft. 9 in. and a length of 42 ft. 2 in. Powered by two Pratt & Whitney engines, spinning Hamilton Standard constant speed propellers, it has a speed that is in excess of 200 mph.

Equipment includes radio compass, automatic pilot, full complement of flight and radio equipment, flexible machine gun, flexible camera gun, power turret and bomb bays.

Troop Glider Revealed

Also in large-scale production is the CG-4, 15-man troop glider designed for service wherever American airborne troops may be called into action. The CG-4 is built almost entirely of non-strategic materials and was designed for typical American mass production methods.

Also coming off the Boeing production lines are large numbers of the CG-4 troop carrying glider with a capacity of 15 fully equipped airborne soldiers. The CG-4 is constructed almost entirely of non-critical materials.

SPECIFY

SHAKEPROOF COWL FASTENERS

for

Metal and Plywood Applications

Fleetwings BT-12

Here's how FLEETWINGS uses them on its BT-12

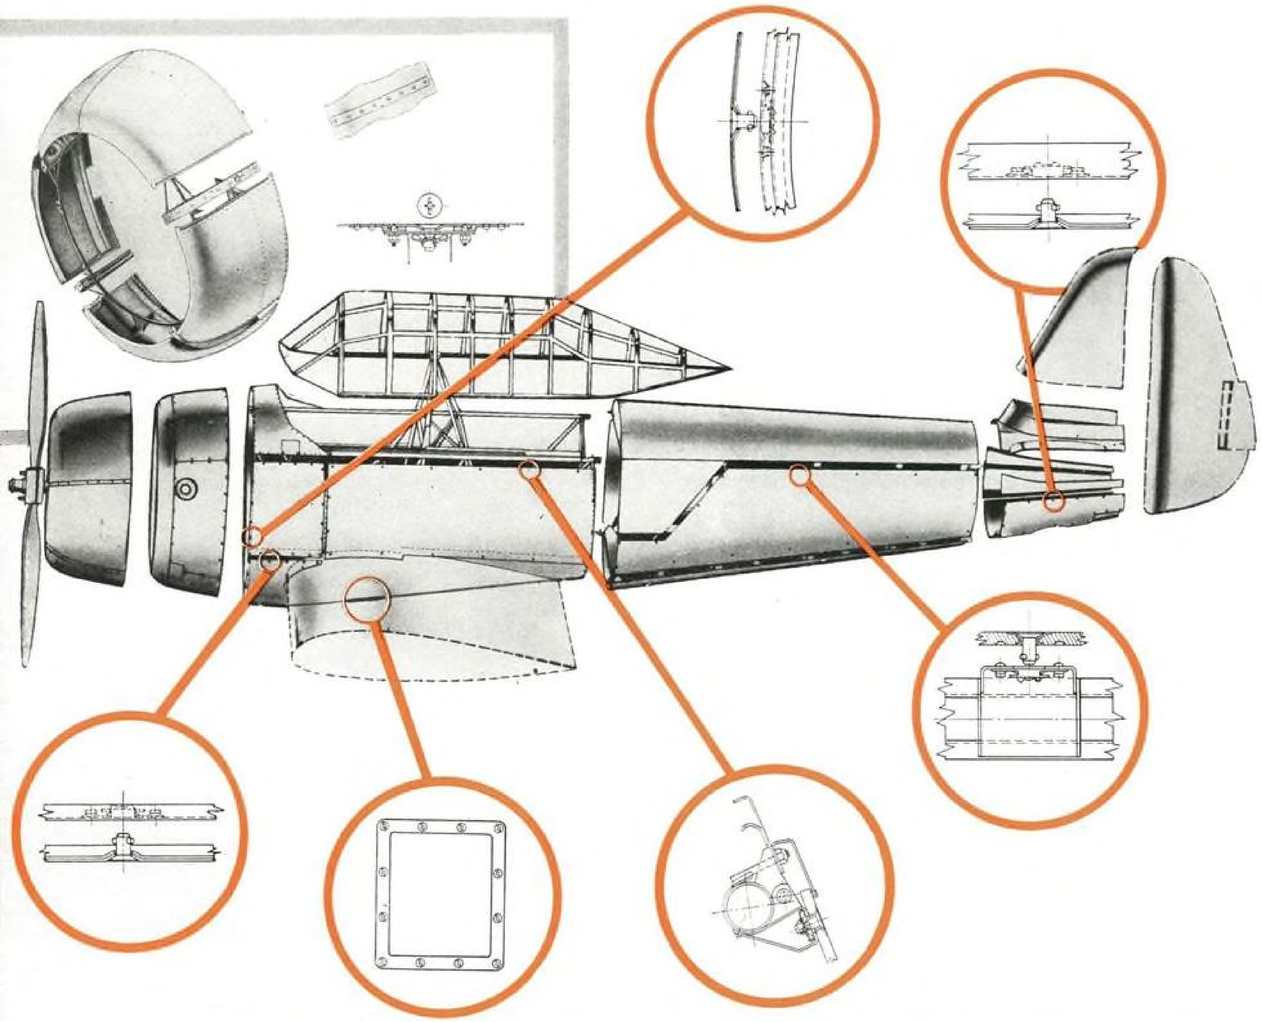

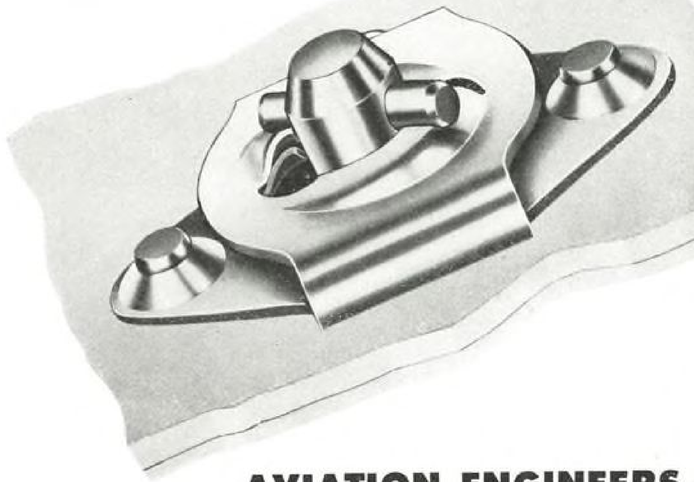

AVIATION ENGINEERS

Send for detailed engineering and procurement data book!



Catalog AD-2 is a comprehensive presentation of Shakeproof Cowl Fasteners. It thoroughly explains the advantages of this better fastener and gives complete engineering, procurement and test data. Write for your copy today!

★ ★ ★

Testing samples are also available to aircraft engineers, buyers and production men!

Here's Why!

- A standard Shakeproof Cowl Fastener Assembly consists of only three parts—spring unit, stud and cross pin—is compact in size and light in weight.
- Shop assembly operations are reduced to utmost simplicity, requiring only standard drilling and dimpling procedures, and insertion of the cross pin in the stud with special pliers.
- Ground crew replacement is correspondingly practical and special adapters are available to permit installation where parts have been tooled for grommet type fastener.
- Shakeproof Cowl Fasteners also have the advantage of actually reinforcing rather than weakening the adjacent structural area—eliminating any possibility of distortion in aluminum sheets.
- The reinforcing base also eliminates load concentration and thus removes the danger of stress hazards, particularly shear at the aluminum attaching rivets.
- Through equalized springing the deflection of the spring unit is definitely limited. The base is formed to provide continuous positive support when the upper flexing bridge reaches the pre-determined limiting point.
- When the Shakeproof Cowl Fastener is turned to the locked position, a pair of abutments or stops prevent further turning of the stud. The assembler thus has assurance that the fastener is locked tight.
- Cover plate, cowling, or other curved or faired sheets attached with Shakeproof Cowl Fasteners may be readily removed without binding on the part of the individual studs—a definite advantage over grommet type studs.
- The design of the fastener assures quick alignment of the sheets to be fastened, compensates for variation in sheet thicknesses and provides for addition of accessories such as stud ejector springs and right angle mounting brackets.

SHAKEPROOF inc.

"FASTENING HEADQUARTERS"

2501 North Keeler Avenue, Chicago, Illinois

Distributor of Shakeproof Products Manufactured by
ILLINOIS TOOL WORKS

In Canada: Canada Illinois Tools, Ltd., Toronto, Ontario

SEMS FASTENER UNITS • THREAD-CUTTING SCREWS • LOCK WASHERS • COWL FASTENERS • LOCKING AND PLAIN TERMINALS • LOCKING SCREWS • RADIO AND INSTRUMENT GEARS • SPECIAL STAMPINGS

BE SURE TO SEND FOR SHAKEPROOF COWL FASTENER CATALOG!

BE READY FOR WINTER'S ATTACK

INSPECT AND EQUIP YOUR FWD's NOW... FOR FAST LOW-COST AIRPORT SNOW CLEARING

Hundreds of FWD's, similar to this model, will soon be put in harness for the winter's work—fitted with mounting equipment and snowplows ready to get into action fighting snow, after a busy spring and summer on regular airport maintenance work.

KEEPING 'EM IN THE BLUE . . . . Calls For Good Clear Runways Below . . . .

Keep 'em flying by giving 'em runways clear and clean of snow. At airports in every state in the snow belt and many Canadian provinces (where heavy snowfalls are a constant menace) FWD trucks are being made ready for snow clearing duty — a service in which they have earned and kept first place.

In cooperation with the aims of the U. S. Truck Conservation Program, FWD lists here a few practical suggestions to enable airport operators to get the most in performance with minimum maintenance out of their FWD snow removal trucks:

Conserve tires—snow removal truck operators are universally agreed that single tires are best in snow removal service. The use of single tires of the same size on all four wheels not only conserves rubber but also reduces excessive differential action, thus prolonging the life of the truck. Closely spaced tire chains—not emergency chains—should be used on all four wheels, for maximum traction and least slippage and damage to tires.

Care of engine—change engine oil frequently enough based on total hours of operation. Keep cooling system clean and free of rust. Control engine temperature with a radiator hood or automatic shutter.

Storing the truck — sub-zero temperatures make lubricants too stiff and solid, cause steels to become brittle. House all your trucks when not in use — avoid outdoor storage for longer truck life.

Inspect your trucks —periodically and check for needed replacements — take advantage of FWD's principle of progressive interchangeability of improvements and vital parts.

See Your FWD Branch or Dealer

The entire FWD organization of factory branches, FWD dealers, and district servicemen are all pledged to help you get the most out of your trucks by aiding your program of preventive maintenance. Call on them frequently for sound maintenance advice and skilled service.

THE FOUR WHEEL DRIVE AUTO COMPANY

CLINTONVILLE, WISCONSIN • ***Canadian Factory: Kitchener, Ont.***

WINTER MAINTENANC

Single tires instead of duals and plenty of chain makes the ideal snowplow combination—one which does the job and conserves the truck.

Night and day hundreds of FWD snow removal trucks keep airports clear so that vital wartime air transportation and pilot training can be carried on without interference.

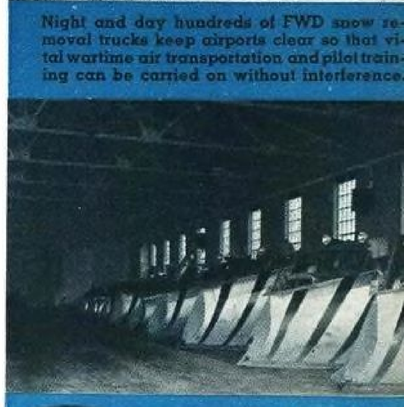

House trucks in warm quarters when off the job and when servicing. Sub-zero temperatures make lubricants too solid, cause steel to become brittle. Avoid outdoor storage for longer truck life.

FWD TRUCKS

—THE PREFERRED TRUCK FOR FAST, LOW-COST AIRPORT SNOW CLEARING

ONLY THE FWD FOUR-WHEEL-DRIVE TRUCK PROVIDES SO MANY OUTSTANDING SNOW REMOVAL ADVANTAGES

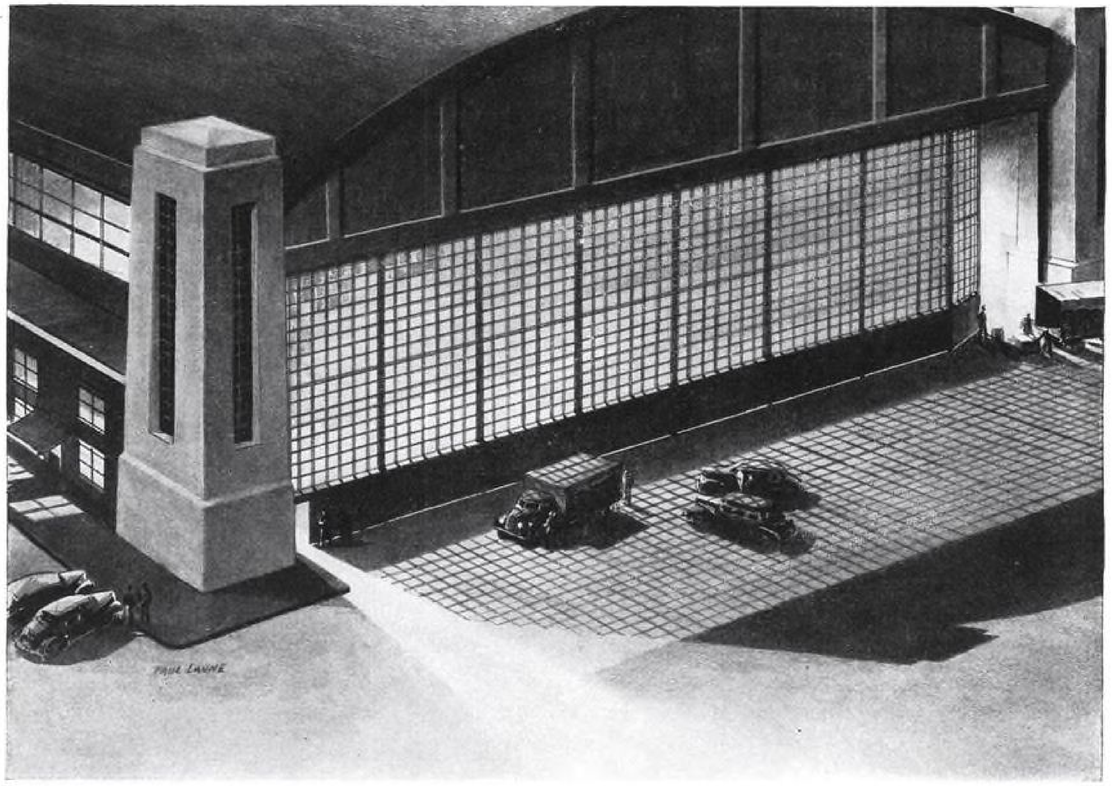

Inside Secret Hangars

When war came to the United States, the aircraft industry was prepared for action. Ready with superior equipment fully developed, the industry expanded quickly into quantity production, enlisting at the same time the productive capacity of other industries.

Behind this achievement lie years of perseverance and millions of brain-hours in research, engineering and development.

In this exacting work Vought-Sikorsky has long played a pioneering role. For 25 years its designers and engineers have periodically come forward with planes of advanced design that have led to outstanding achievements in military and commercial operations. Now, inside secret hangars, new types are taking shape that will help carry American air superiority to new heights.

VOUGHT-SIKORSKY AIRCRAFT

Stratford, Connecticut

ONE OF THE THREE DIVISIONS OF UNITED AIRCRAFT CORPORATION

The AVIATION NEWS

BLAINE STUBBLEFIELD, Washington C. B. F. MACAULEY, New York E. EUGENE MILLER, New York JOHN FOSTER, JR., New York

See New Controlled Materials Plan As "Principal Framework" for WPB

Washington (AVIATION Bureau)—The Controlled Materials Plan, scheduled to replace the Production Requirements Plan, may eventually become the "principal framework" of WPB operation, it was predicted here as details of the plan became known.

Chairman of the Controlled Materials Board is Harold Boechenstein, president and general manager, Owens-Corning Fiberglas Corp., and assistant director is W. C. Skuce, supervisor of materials procurement, General Electric Co.

In broad outline, CMP is designed as a yardstick for purchase of all materials—a means of eliminating overbuying and a plan to match available materials with authorized and scheduled production. In operation, its Requirements Committee will, by Feb. 1, make tonnage allotments for the second quarter of 1943 to the seven so-called claimant agencies: The War and Navy Departments; Aircraft Scheduling Unit; Maritime Commission; Lend-Lease; Office of Civilian Supply; and Board of Economic Warfare.

These agencies will, in turn, divide their allotments among the prime contractors involved, who will further divide the allotments among their subcontractors.

Aluminum, steel, and copper are the first materials to be listed, but others will be added soon. After July 1, 1943, when CMP is expected to be in full operation, mills producing these metals must fill orders through allotments under the plan. For three months prior to that date, preference ratings will take care of manufacturers who do not receive their CMP allotments in time. However, it should be noted that allotments for a given month will be filled ahead of orders bearing preference ratings. Distribution of all materials other than CMP-regulated materials will be governed by preference ratings.

Revisions of material flow to take care of design changes must be taken care of by the claimant agency, WPB officials have declared, pointing out that if such changes involve additional material, the agency may appeal for it.

Cripps Heads British Aircraft Production

In an unexpected cabinet shakeup, Sir Stafford Cripps has become Britain's Minister of Aircraft Production. He succeeds Col. J. J. Llewellin, who moves to the newly created post of Resident Minister at Washington, D. C., where he is slated to assume charge of supplies.

In taking the new post, Sir Stafford has resigned from the War Cabinet in what some of his friends have considered "a political move to keep him from the spotlight." However, Prime Minister Churchill, in asking him to accept the post, wrote: "It seems to me that the production of aircraft and the development of radio technique lie at the very heart of our affairs."

Combat Needs Void N-K Cargo Plane Order

Cancellation of the Navy's contract with the Nash-Kelvinator Corp. for cargo flying boats is announced by Rear Adm. E. M. Pace, Jr., director of the Navy Department's materials division. Reason: Pressing need for more combat planes and patrol bombers in the South Pacific war theater.

"Above all we must give the men on the firing line the planes and weapons they require," states Adm. Pace, "and that now means that some of the facilities available through Nash-Kelvinator for flying boat production will have to be turned over to contractors who are already at work on the types of planes we now need."

Accordingly, George Mason, Nash-Kelvinator president, reports that his corporation's new plant in the South will be taken by another manufacturer. Meanwhile, some of the subassembly facilities laid out for production of the cargo planes (they were to be Vought-Sikorsky types) will be converted to the making of combat-plane engines and propellers. This will simply increase Nash-Kelvinator's present schedules on these products, and thus dislocation of labor in the affected plants will be avoided.

TWA & UAL Capital Flights

CAB examiners have urged grant of temporary airline certificates to TWA and United Air Lines to operate services into Washington, D. C. TWA would fly from Dayton, Ohio, while United would come in from Toledo. The lines say they do not need any new equipment for the proposed service. Early decision by the board is expected, after which final permission must come from the War Department. It is believed approval will be granted in line with promoting prosecution of the war.

Walsh, Miller Promoted

Advancement of Raycroft Walsh from the post of vice-president to that of senior vice-president is announced by the United Aircraft Corp. And new vice-president is J. Reed Miller, formerly general manager of the corporation's export division.

SLEEK SUCCESSOR TO AT-13

Tested—Fairchild's new AT-14 bomber-crew trainer. Seen here in first flight over company's Maryland field, AT-14 is built almost entirely of plastic-bonded plywood via Duramold process. Two Ranger in-line aircooled twelve-cylinder engines, each supplying 520 hp. for takeoff and 450 hp. at 12,000 ft., power this 200-mph.-class craft. Both tactical equipment and ample space is provided to train bomber crews "to coordinate as a team," states Vice-President R. S. Boutelle, who further points out that plane embodies many advances in design over original AT-13 trainer (detailed on p. 225, September, 1942, "Aviation"). Approximately 53 ft. in. wing span and 38 ft. in over-all length, AT-14 carries ten 100-lb. bombs, recent-type bombsight, and machine gun (interchangeable with gun camera) in power-driven plastic turret.

Spikes "B-24 Deception"

Statements that Consolidated flew B-24's to its Southwest plant to give a semblance of greater production on the occasion of the President's recent visit have been branded as "utterly false" by Tom M. Girdler, chairman of the company's board.

Refuting the remarks made before the Subcommittee of the Senate Committee on Education and Labor, Mr. Girdler wired Senator Pepper that bombers could not be flown in by the company for deception "for the simple reason that

the movements of planes in and out of the airport are controlled exclusively by the Army."

The accusations are "utterly false and unfounded," declared Chairman Girdler, "and they could do great harm to the war effort if allowed to stand uncorrected."

CAB Cuts EAL Mail Pay

CAB has ordered a substantial reduction in the rate of mail payment to Eastern Air Lines, effective as of Oct. 1, 1942, amounting to about $773,000 a year. The board also urged the carrier to consider reduction in passenger rates.

The new rate of 0.3 mill per pound mile was made applicable to all Eastern's routes between New York and Miami, Chicago and Miami, New York and Brownsville and San Antonio, and various intermediate points.

In asking for passenger rate reduction, the board pointed out that for the year ended June 30, 1942, Eastern's average revenue per passenger mile was 5.21c. as compared with an average of 5.02c. for all other domestic carriers.

Looks to Postwar Export

Major importance of the export trade as a prime factor in meeting postwar problems is foreseen by Aviquipo—Aviation Equipment & Export, Inc.—as the organization marks the start of its tenth year. The company, headed by Samuel Niedleman, formerly chief engineer of Bird Aircraft Corp., represents aircraft and engine companies, airlines, flying clubs, and government departments in operations abroad.

What to do with the industry's huge production capacity, surplus stocks, ready materials, and abundant trained personnel when peace comes is a question demanding careful planning today, states Mr. Niedleman, who points out that "we will have to 'go after' sales and service abroad when the United Nations' commissions no longer lay the business at our doors."

Aviquipo was the first to sign under the Export Control Act of 1935, receiving Department of State License No. 1. It is now maintaining its New York City staff and continuing its business despite the difficulties imposed by war, currently using its procurement facilities to service requirements of manufacturers working on government contracts, as well as handling assembly-work subcontracting.

The company has given new weight to the South American field. The war closed its Brussels and Hongkong offices. However, the manager of the latter still "carries on" at Chungking and Chengtu.

Wide World photo

FRENCH LAUNCH 63-TON "SE 200"

From yard at Marignanne, France, comes SE 200, Gargantuan six-engine, 63-ton flying boat. Intended by Vichy for postwar trans-ocean travel, ship no doubt is now in Nazi hands. Specifications and data: Wing span, 171 ft.; length, 131 ft.; height, 32 ft.; power, six 1,500-hp. engines, make not named; cruising range 3,726 mi.; accommodations, crew of 8 and 40 passengers; freight capacity 13,200 lb. Completion of larger 70-ton flying boat is also reported.

Key Officers Take New Commands

Several changes in command are announced. First, Lt.-Gen. Frank M. Andrews has become chief of the United States Forces in the Middle East, while Lt.-Gen. George H. Brett has assumed the Carribbean Defense Command. Returning from the Southwest Pacific with Gen. Brett was Col. Ralph Royce, leader of the long-range raid on the Philippines, who now takes command of the Southeast training center.

Gen. Andrews goes to the Middle East from the Carribbean Defense Command, where he was the first to be placed in charge of combined land-sea-air forces. Joining the Signal Corps, Aviation Division, in 1917, he was commanding officer, Headquarters Air Force, Air Corps, 1935-39, and he is said to be one of the two or three officers who gave wholehearted support to the basic scheme of B-17 hemisphere defense first proposed by Boeing.

Further, Maj.-Gen. Henry J. F. Miller has been named to head the European theater Air Service Command, while Maj.-Gen. Walter H. Frank becomes commanding general of the ASC in this country. This is an exchange of commands to "spread" combat zone experience.

U. S. Signal Corps photo

LT.-GEN. FRANK M. ANDREWS
Now Middle East Chief

Official USAAF photo

MAJ.-GEN. HENRY J. F. MILLER
Heads European ASC

Machine Tool Amendment

Machine tool manufacturers have been instructed to give special emphasis to aircraft requirements, in accordance with Amendment No. 3 to General Preference Order E-1-b, issued No. 5, by the WPB. The amendment gives new directions for scheduling machine tool deliveries to the armed services. Order E-1-b provides for apportioning of each producer's monthly deliveries for each type of tool, 75 percent to the services and 25 percent to other buyers. Without affecting this division, Amendment 3 increases deliveries of machine tools to the air services, their prime contractors, subcontractors, and other companies upon which the air services depend.

Wright-Langley Rift Ended

After 28 years, the Smithsonian Institution, through its secretary, Dr. Charles G. Abbot, has acknowledged that the Wright brothers were the pioneers in airplane invention, not Dr. Charles Langley, former Smithsonian secretary. Dr. Abbot admitted that the Langley plane of 1903 could not have been flown successfully, thus ending a long dispute.

In 1914, incident to a patent suit between the Wright brothers and Glenn Curtiss, the Langley *Aerodrome* was taken from the National Museum, reconditioned, and fitted with a new engine. And it then made a number of takeoffs from the surface of Lake Keuka, New York. Supporters of the Wright claims asserted that some 35 changes in construction were made without which the Langley machine could not have flown at all.

Orville Wright refused to permit the original Wright biplane to be shown with the Langley machine at the National Museum, sent it instead to a British museum in 1928. It is expected that Dr. Abbot's report will clear the way for the return of the Wright plane to this country.

Nick Craw Killed in Action

Col. Demas "Nick" Craw, of Charlottesville, Va., has been killed in action during occupation of North Africa. He was on a special mission through which it was hoped to avoid needless bloodshed. Col. Craw had long been a proponent of long-range bombers, which have now turned in such an enviable record. He had been in Egypt since the early stages of the war.

NATTC to Chicago

Rear Adm. Albert C. Read, Jr., will operate the Naval Aviation Technical Training Command from Chicago instead of from the Bureau of Aeronautics, Washington—a further move toward decentralization.

Included is general supervision of all technical aviation training (mostly the trades that must be learned by enlisted men).

Canada Builds 400 Planes A Month; U.S. Engines Used

From a production of 100 a year in 1939, Canada has increased its output to a present rate of 400 airplanes a month, or about 5,000 a year, according to a report by Canadian Munitions Minister C. D. Howe.

Production includes trainers, Avro *Lancaster* and de Havilland *Mosquito* bombers, other light bombers, night fighters, and reconnaissance planes. Tooling is underway for production of Curtiss dive bombers.

Mr. Howe said that the plywood *Mosquito* is turning out to be a very serviceable attack plane, and he implied that it is used by other than British forces.

Canada gets nearly all its airplane engines from the United States.

Dedicate El Paso "Link"

Last link in a chain of scheduled airlines extending from Nome, Alaska, to Santiago, Chile, was forged in November when El Paso, Tex., dedicated its new municipal airport, thus closing the last main-line gap of the north-south airways route through the Western Hemisphere.

From the new port, which is equipped for immediate customs clearance, Continental Air Lines operates north to Denver, while American Airlines flies to Mexico City.

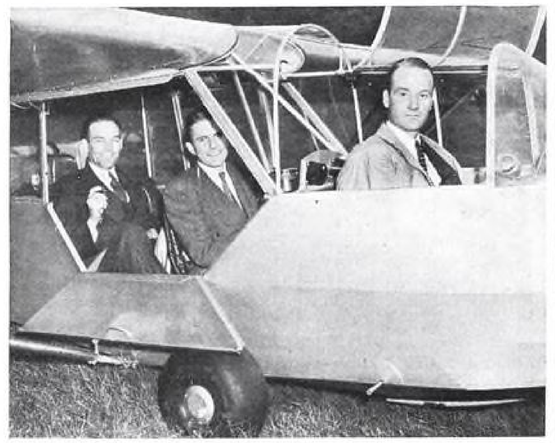

FIRST-HAND INFORMATION

L. Welch Pogue, recently appointed chairman of the Civil Aeronautics Board (left), in Piper glider just before start of a pickup flight. His pilot is Richard C. du Pont, president of All-American Aviation, Inc., which developed the glider pickup technique from its air mail pickup system. Passenger in center is Robert B. Bias, assistant to Chairman Pogue.

International News photo

TOUR HIDDEN PLANT

British underground airplane factory is viewed by American aviation leaders from tiny plant train, as "No Passengers" restriction is waived. Observers (l. to r.) are: Don Welty, general manager, Aluminum Corp. of America; H. R. Bloss, deputy director, British aircraft production; A. G. Herreshoff, of Chrysler; M. C. Marcus, vice-president, Bendix Corp.; unnamed British official; Sir Charles Bruce Gardner, chairman, Society of British Aircraft Constructors; J. Carlton Ward, Jr., president, Fairchild Engine & Airplane Corp.; and another unidentified Briton.

British Have New Spitfire With Bigger Rolls Engine

An improved Vickers Supermarine *Spitfire* is now in action. It mounts the Rolls-Royce *Merlin* 61 engine instead of the 45 or 46. Old and new airframes are almost identical. Nose of the improved *Spitfire,* however, has been made slightly longer to take the larger powerplant.

Chief difference in appearance, apart from the nose, is in the wings; for underslung radiators are carried on both starboard and port. Radiator under the port wing, replacing a somewhat smaller oil-cooler, is associated with the engine intercooler, which is a feature of the two-stage supercharged *Merlin* 61.

Engine installations differ in following respects: Position of air intake changed slightly; over-all length somewhat greater, because of location of intercooler immediately aft of engine; exhaust stubs multiple type instead of triple ejector form; propeller a four-blader rather than the three-blader used on *Merlin* 45 and 46.

Armament consists of two cannon plus four machine guns mounted in the wings.

New firm names are added daily to that significant all-America team of companies honored for their exceptional performance on the war production front.

Right to fly the Army-Navy "E" flag with two stars has been won by the following firm:

International Nickel Co., West Virginia plant.

Honored with addition of one star to Army-Navy "E" flag are the following:

Edward G. Budd Manufacturing Co.
Pratt & Whitney Aircraft Division, United Aircraft Corp.
South Bend Lathe Works.

Latest winners of Army-Navy "E" flag:

Aluminum Industries, Inc.
Axelson Manufacturing Co.
B. F. Goodrich Co.
Bell Aircraft Corp.
Eclipse Aviation and Pioneer Instrument Division, Bendix Aviation Corp.
Boeing Airplane Co., Midwest plant.
Bonney Forge & Tool Works.
Budd Wheel Co.
Cessna Aircraft Co.
Chain Belt Co.
Clarostat Manufacturing Co., Inc.
Continental Motors Corp., Michigan plant.
Edo Aircraft Corp.
Ex-Cell-O Corp.
Gisholt Machine Co.
General Electric Co., Schenectady works.
Independent Pneumatic Tool Co.
International Resistance Co.
Leece-Neville Company.
N. A. Woodworth Co.
National Broach & Machine Co.
Scott Aviation Corp.
Sheffield Corporation.
Solar Aircraft Co.
Sundstrand Machine Tool Co.
Sunnen Products Co.
Switlik Parachute Co.
Veeder-Root, Incorporated.
Ward Leonard Electric Co.
Westinghouse Electric & Manufacturing Co., five Pennsylvania plants.
William Sellers & Co.

PRODUCTION BATTLE CITATIONS

History and explanation of awards: The "E" flag was first introduced by the Navy in 1906 for excellence in gunnery, then later the honor was extended to include outstanding performance in engineering and communications. Most recently, as war engulfed Europe, the Navy further extended the "E" burgee award to embrace those plants and organizations turning in high performance in the production of ships, weapons, and equipment for the Navy. And finally, following Pearl Harbor, the present Army-Navy joint "E" award was born.

Those honored may fly the flag above their plants, and the employees receive silver oak and laurel-wreathed "E" pins. The original flag award represents outstanding production performance extending over a twelve-month period. For each additional six-month period of such excellence, a white star is bestowed to be flown on the earlier-awarded flag.

2 small POWER RELAYS

PROVEN BY TWO YEARS UNDER THE FIRE OF EXPERIENC

ACCEPTED FOR THEIR DEPENDABLE & UNWAVERING PERFORMANC

BO

BO and BJ power relays meet every known requirement for flight, firing and communication control.

BO and BJ are Relay Veterans. They have seen two years on the firing line of experience . . . on the sea . . . in the air . . . and on land. They have proven themselves durable and completely dependable.

BO and BJ have semi-balanced armatures which require minimum wattage to withstand shock and vibration up to 12 G . . . they operate at temperatures of 120 plus or 50 minus . . . they are corrosion resistant beyond specifications . . . their weights are significantly low . . . their dimensions are minute . . . their double pole double throw design permits abundant contact arrangements . . .

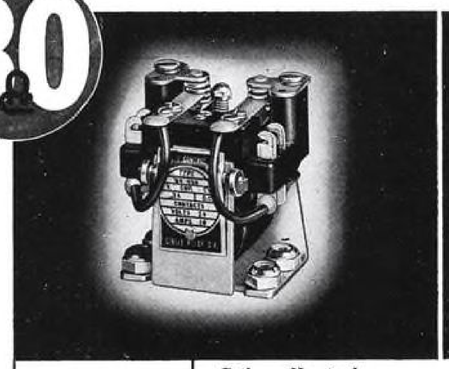

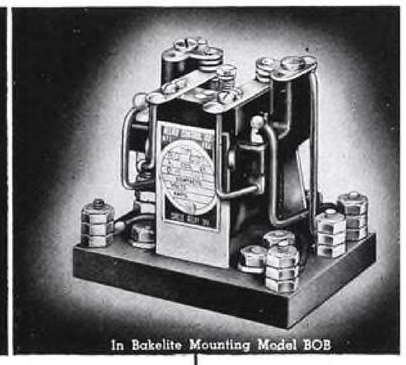

In Bakelite Mounting Model BOB



Coil Number	Nominal Volts	Amperes	Resistance	Watts
28	5.0	.500	10.0	2.5
29	6.0	.422	14.2	2.5
30	7.8	.319	24.5	2.5
32	13.2	.190	70.0	2.5
33	15.4	.162	95.0	2.5
34	20.	.125	160.	2.5
35	24.	.106	230.	2.5
36	32.	.078	415.	2.5
38	50.	.049	1024.	2.5
42	112.	.022	5000.	2.5



The above coil data is based on continuous duty at nominal operating voltages. Coils are impregnated to withstand humidity and salt spray. Bakelite parts are molded. Contact arrangement D.P.S.T. Double break normally open or closed and D.P.D.T. Contact rating non-inductive 15 amperes for 12 and 24 volts D.C. and 110 volts A.C.

BJ

. . . and they are INTERCHANGEABLE

. . . variations in the mounting base can be made to make this relay widely interchangeable



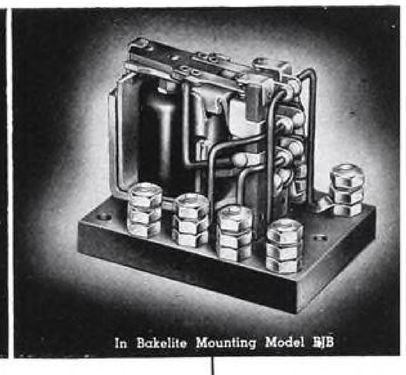

In Bakelite Mounting Model BJB

BO and BJ are *Accepted* and *Approved* RELAYS



Coil Number	Nominal Volts	Amperes	Resistance	Watts
24	1.61	1.243	1.293	2
26	2.56	8003	3.270	2
28	4.07	4918	8.267	2
30	6.47	.3093	20.90	2
32	9.92	.2017	49.16	2
34	15.0	.1332	112.6	2
36	25.4	.0786	323.5	2
38	39.5	.0506	780.6	2
40	59.6	.0339	1738.	2
42	86.3	.0232	3725.	2



The above coil data is based on continuous duty at nominal operating voltages. Coils are impregnated to withstand humidity and salt spray. Bakelite parts are XXXP laminated wax impregnated. Contact arrangement D.P.S.T. Double break normally open or closed and D.P.D.T. Contact rating non-inductive 5 amperes for 12 and 24 volts D.C. and 110 volts A.C.

ALLIED CONTROL COMPANY, INC. ★ 227 FULTON ST., NEW YORK • Factories: NEW YORK CITY • LONG ISLAND CITY • CHICAGO • PLANTSVILLE, C

CAA Technical Division Makes Progress Report

Among a number of important new devices in aviation just announced by the Technical Division of CAA is the seadrome day marker, which is floated on a rubber "doughnut" similar to that used for the seadrome night marker, mounting a distinctive plywood, rubber-covered symbol, either a circle or triangle, placed on a standard 6 to 9 ft. above water and visible from all angles.

Successful experiments have been made to produce an airplane windshield which can be effectively de-iced and is strong enough to withstand the impact of heavy birds in flight.

Various radio improvements have also been reported by CAA. The new high frequency two-course radio range, which combines simultaneous voice communication and sector identification, has reached the stage of actual installation. Radio teletype circuits and controls operated on a frequency modulation system bring inaccessible radio facilities and remote weather and traffic control posts under the direction of CAA men in the field.

Simple and less expensive radio fan marker monitors have been developed and are ready for installation. An automatic radio range monitor is now under development which not only serves as a warning to CAA airways workers when a radio range gets as much as 3 deg. off its proper setting, but also sends a distinctive aural warning to the pilot that the range is not on a proper bearing. Progress has been made in the instrument landing fields, with great implications for military flying, but the results are not made public. To prevent the most common of accidents during training, CAA has developed a highly effective stall warning device.

There are a number of new chemical combinations under study for speeding up the work of preparing usable landing surfaces. The War Department has specifically requested six such projects of the CAA.

Urges Better Loading

Twenty-five thousand C-87 planes—the cargo version of the Consolidated B-24 bomber—could carry the freight now moved by American railroads which use 1,700,000 freight cars, Col. Edward S. Evans, president of the Evans Products Co., declared in an address to the Air Cargo Research Association in Los Angeles.

He said that if proper loading methods were used by airlines doing work for Army, the payloads could be increased by 33⅓ percent. A study should be made of containers used for shipping to reduce weight and regulate its strength to the strains to which it is subjected, he added. These two factors, coupled with the fact that it is much simpler to load a plane, lead him to believe the cost of air freight will be less than first-class rail freight.

Flight Schools for Mexico

Washington (Aviation Bureau)—Mexico will establish two pilot training schools similar to those being operated in this country by CAA, the State Department has announced.

MORE FIREPOWER FOR THE AAF

First group of Boeing B-17 "Flying Fortresses" to be outfitted and armed with increased fire power by Douglas Aircraft Company at a government-owned assembly plant "somewhere in the Southwest." The process, as exemplified by this instance, has proved invaluable in speeding American aircraft from the assembly lines to fighting fronts with the latest and most potent equipment.

THE WASHINGTON WINDSOCK

By BLAINE STUBBLEFIELD

Little was known of air bases in eastern Russia till recently. The Russians didn't want to tell us because they think we are too gabby. Authorized persons have seen these bases recently and found them numerous, equal to our own best, and adequately equipped for snow removal.

Alcan is an ugly word, but it's the name of our new Alaska-Canada highway, already open, and being completed this winter. Officials say never a word, but everybody here believes that transport planes will shuttle the short jump between the north end of this road to Russian bases with great quantities of war supplies. The route would go far north of the Aleutians, so the Japs couldn't interfere even if they manage to stay there. Or, Russia could buy and fly the planes, which would not be attacked so long as the two countries are not at war.

They were pals. Long ago, Andrew J. Higgins built an airplane and young (Col.) John Jouett, who has quit the Aero Chamber to head Higgins' new aircraft division, flew it for him. Another young fellow came along and got a job flying the plane and was killed in it. Higgins gave the man's wife $5,000, all the cash he had at the time.

A man with Willkie on his trip around the world, said Gen. Claire Chennault told him that American Air Forces in China are in a position, and ready, to bomb Japan's industrial centers any time they can get enough airplanes and supplies.

We had lost four aircraft carriers at this writing. When the war started we had 7, had 11 more under contract—total 18. This program undoubtedly has been increased. We launched a new *Lexington*, which, when delivered, will give us four regular carriers in service. An unknown number of merchant and warships have been converted to flat tops. We are ahead of the Japs, who have lost six or seven of their original ten—outside of small conversions—which are about half the size of ours.

Viva Mexico. Enough war gear has gone south of the border to equip 500,000 soldiers. This includes a lot of airplanes, which are armed at the border and flown in by Mexican pilots. Mexico is planning air convoy for shipping in the Gulf.

Confusion report. A military magazine printed a story the other day saying the Commonwealth Air Training Scheme turns out 500,000 airmen a year, including 25,000 pilots, at 93 schools. We called up the embassy and asked if it was so. They read us the riot act for wanting to print war secrets, and complained that the military magazine had skated on the edge of treason. The next day we found the British press release from which the military magazine had taken the whole story. I say, cawn't you chaps get together?

Not so much rubber is being flown as you might suppose. It was assumed in some quarters that the Miami-Carribbean air route program was mainly to fly latex from wild jungle trees. Our stockpile of rubber will last till late next year; imports can move fast enough in surface ships.

The Stubblefield award goes to Rome Radio, which invites the RAF to keep on bombing the Italians. "Bombing is an excellent morale booster," it says. You can have it, Benito; we'll take a zombie.

CALLING NAMES

Harry Woodhead, president of Consolidated was elected president of Vultee Aircraft. Vultee directors also elected I. M. Laddon, v. p. and g. m. of Consolidated, vice president of Vultee.

Gerard Swope has been selected as the sixth recipient of the Hoover Medal for "constructive public service in the field of social, civic, and humanitarian effort." He was also recently elected pres. of General Electric for the second time when Charles E. Wilson, his successor, was named vice-chairman of WPB.

Thomas F. Kahoe, Lester H. Lancaster and **John S. Robertson** have been named general superintendents of three of Pratt & Whitney's plants.

Herbert O. Nelson, formerly with Hill & Knowlton, public relations, has been named director of public relations for Interstate Aircraft.

E. P. Barry, formerly with Glenn L. Martin, has been named plant coordinator for Chicago Pneumatic Tool and will supervise production methods.

Terrell C. Bonnie has been appointed TWA's district traffic mgr. at Albuquerque, succeeding **John S. Winchell** who has been transferred to the Intercontinental Division; and **Clyde S. Fullerton** has been named director of a newly created training division of the line, with headquarters in Kansas City. **M. Denis Murray** was appointed district traffic mgr. in Washington and **E. T. Huber** in Boston.

Elmer P. Guth has joined the staff of Pesco field engineers. He was formerly with Waco, and before that with White Motor. He is a member of the SAE and the Institute of Aeronautical Sciences.

George H. Tweney has been appointed acting director of the Department of Aeronautical Engineering at the University of Detroit, while Prof. **George J. Higgins** is on leave of absence as a Lieutenant-Commander in the Navy.

Charles Nelson, Jr., was appointed chief engineer of Ahlberg Bearing in charge of bearing design and development work.

K. R. Van Tassel has been appointed sales manager of the newly formed integral-horsepower motor section of G. E. and **D. A. Yates** has been placed in charge of the Lynn motor group. **D. L. Beeman** has been appointed engineer, industrial power section, and **R. S. Sage,** engineer, mining section.

Lorenze Iversen was elected member of the board of directors of All American Aviation, and the following directors were reelected: **Richard C. du Pont, Grover Loening, Richard P. Dunn** and **Charles W. Wendt.**

Millard B. House has been appointed controller of NWA; and NWA also announces the promotion of **Gordon MacLaren,** former N. Y. district traffic mgr. on leave with the Navy, to Lieutenant, senior grade.

T. E. Tillinghast has been elected pres. of United Aircraft Service Corporation, succeeding **Eugene E. Wilson** who resigned as pres. of the Service corporation.

John Croft, Flying Tiger who was credited with the destruction of two Japanese planes, has joined his AVG companion **Parker Dupuoy** as a Republic test pilot.

Maj. William O'Dwyer, Air Corps, has been appointed Acting Air Inspector of the newly created office of Air Inspector, Materiel Command, Army Air Forces.

Col. T. B. Wilson, transportation chief for Gen. MacArthur in the Southwest Pacific area, has received the honorary degree of Doctor of Aeronautic Science for "distinguished service in the field of aviation education" from Iowa Weslsyan College, where he was instrumental in setting up an air transportation course. TWA also announces that **Bart Pevear** of public relations and **Ronald Veeder,** traffic representative, have been commissioned first lieutenants and **C. R. Crome,** cooperative advertising mgr., and **Michael Corley,** reservations control representative, second lieutenants, all to join Col. Wilson's group.

Douglas Aircraft nominates for its "Team of the Month" **F. W. "Ted" Conant,** vice-pres. in charge of manufacturing, and **Edward L. Markham** of fuselage installations department, his partner in production.

George Rentschler, pres. of General Machinery Corp. and chairman of the Southeastern Shipbuilding Corp., and **William H. Houghton,** comptroller of Bendix, have been elected to the board of directors of Bendix Aviation.

Catherine Hunzinga, dubbed "War Cinderella" at Wright Aeronautical for taking over her brother's job as bench burrer when he was called to the Army.

J. Gordon Hussey is pres., **Frank Belcher,** vice-pres., **Stewart C. Williams,** secy. and treas., and **Verne Robinson** and **E. U. Wheelock** directors of Aero Services, Inc., plane salvagers for Army Air Forces and private concerns.

Dan C. Hungerford has been elected pres. and gen. mgr. of Aircraft Parts Development Corp. Before joining Aircraft Parts he was vice-pres. and a director of the Elastic Stop Nut.

Frank J. Carter, since 1938 general superintendent of Goodyear's Brazilian plant, has been appointed personnel mgr. in this country, succeeding **R. S. Pope,** recently made director of personnel.

R. B. C. Noorduyn, vice-pres. and gen. mgr. of Noorduyn Aviation Ltd., was elected pres. of the Air Industries & Transport Assn. of Canada, formerly the Air Transport Assn., succeeding **James Young,** pres. of Canadian Pratt & Whitney, whose term as director had expired. **C. H. Dickins,** gen. mgr. of Canadian Pacific Air Lines, was elected vice-pres., and **W. F. English,** asst. vice-pres. of TCA, was elected honorary secretary. **M. E. Ashton,** pres. of Wings, Ltd., was reelected honorary treasurer. Other directors: **J. N. Baird,** British Aeroplane Engines; **W. N. Deisher,** Fleet Aircraft; **P. C. Garrett,** de Havilland; **Grant MacDonald,** MacDonald Bros.; **C. R. Troup,** Canadian Pacific; and **W. B. Burchall** who is full-time executive secy., was reappointed.

Harper MacNeill, traffic representative, Trans-Canada, has been promoted to district traffic mgr. in New York, succeeding A. P. Wilson, who has been granted leave of absence to accept an appointment as pilot officer in the RCAF.

Dr. Mordecai Ezekiel has been appointed Executive Assistant to Vice-Chairman Charles E. Wilson, WPB.

Charley Golenpaul, sales executive of Aerovox was elected to his third term as chairman of the Sales Managers' Club.

Capt. Sid. S. Pike, former head of Skywriting, Inc., has been heard from, from "somewhere in the middle East," where he is serving with a bomb squadron.

Reclassification Opens Aircraft Jobs

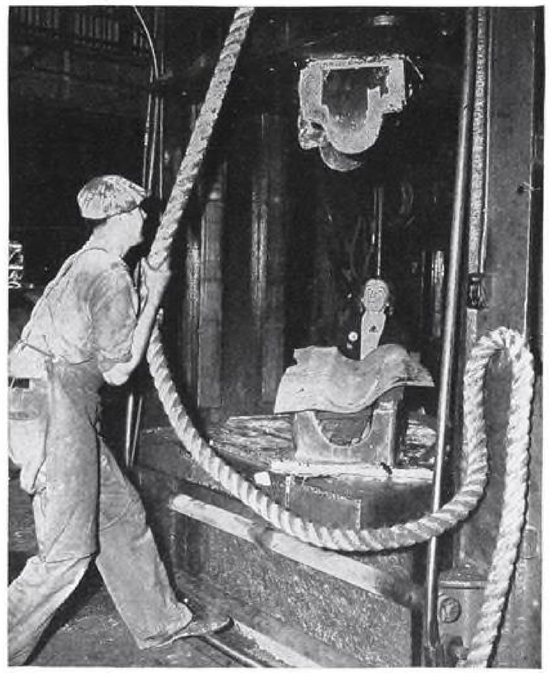

TEAMWORK DOES IT

Handicapped only by small stature, Mrs. Elizabeth Laughlin has been found efficient as a drop hammer feeder in the Aircraft Components, Inc. plant. Heavy work is done by 6 ft. 4 in. operator Theodore Rothner.

Plans for reclassification of jobs in preparation for employment of heretofore rejected personnel applicants is under way in Pacific coast aircraft plants. Three firms, Consolidated Aircraft Corp., North American Aviation Corp., and Aircraft Components, Inc., have announced that progress has been made.

Typical of the new attitude, precipitated by the growing manpower shortage, is the employment by Aircraft Components of Mrs. Elizabeth Laughlin, who is less than 5-ft. tall, as assistant to 6 ft. 4 in. Theodore Rothner, drop hammer operator. Mrs. Laughlin serves as feeder.

North American has listed 178 persons who are physically handicapped in one or more ways, including totally blind, deaf and persons with but one leg or one arm, now on its payrolls. Among the occupations listed for this group are machine operators, sheet metal workers, painters, welders, parts installers, tube benders, tool designers, inspectors, timekeepers, and storeroom clerks.

Officials report that the handicapped employees are performing their jobs to the complete satisfaction of their department heads. One man, who uses a wooden leg, is now a leadman in his department.

A rigid physical examination is required to determine exactly the limits within which a handicapped man or woman may be employed.

Consolidated's president, Harry Woodhead, has announced that each job in its plant is to be evaluated to find out what physical strength, aptitude and dexterity are needed to fulfill it effectively. When these are known, even blind persons who are otherwise capable of employment will be hired for such jobs as they can perform.

Dr. A. C. Dick, head of the company's medical department, is in charge of the new job survey.

ERCO

Automatic Riveters

Now Represented by

AERO TOOL CO.

On the Pacific Coast

ENGINEERING RESEARCH CORPORATION manufacturers of Erco Automatic Riveting Equipment, is now represented in the West by the Aero Tool Company.

Erco Riveters are the only single unit machines that punch, dimple and rivet, saving many hours and reducing multiple operations in aircraft construction. The trained Erco service staff of the Aero Tool Company is now at the disposal of Pacific Coast manufacturers.

AERO TOOL COMPANY • 231 WEST OLIVE AVE., BURBANK

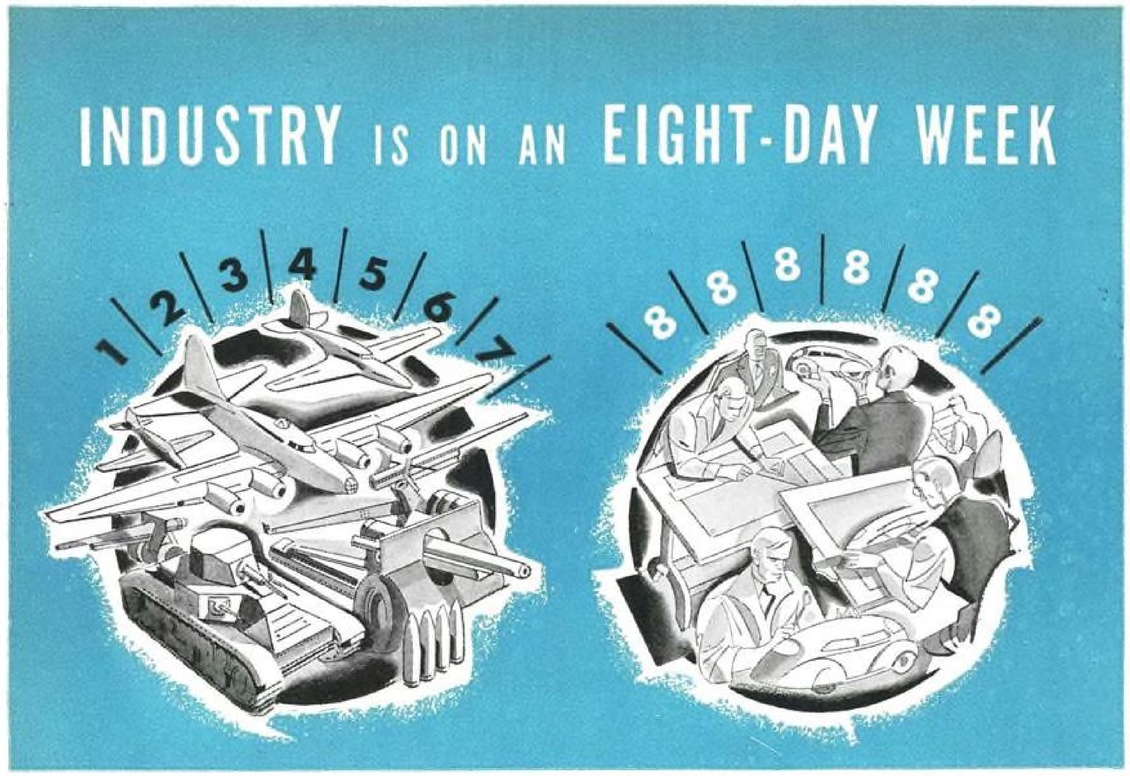

Seven days a week America is doing one of the greatest jobs of production the world has ever known. We are living with one part of that job here at Alcoa, where over seventy thousand men and women are producing Aluminum in quantities that were mere fantasy yesterday.

But there's an eighth day tucked in among the few open spaces in the seven-day week. Engineers are able to squeeze in some important Imagineering about post-war products—planning that will help convert war jobs into peace jobs.

For instance:

Imagine what 1,000 pounds less weight in the automobile of the future would mean in performance, gas economy and tire life. Then engineer it down to the realization that 1,000 pounds *can* be taken off by using, say, 500 pounds of Aluminum per car.

Now translate possibilities such as these into your own business.

Aluminum costs less today. New methods, techniques, processes, and new forms of metal coming out of the war effort will all be available for the as-yet-untold possibilities in tomorrow's peacetime products and peacetime services.

Our eighth day is devoted to helping Imagineers throughout industry use the potentialities of Alcoa Aluminum in bettering the new ideas they are dreaming up. ALUMINUM COMPANY OF AMERICA, 2182 Gulf Building, Pittsburgh, Pennsylvania.



ALCOA ALUMINUM

Plane Production Levels Off; Higher Output of Bombers Raises Value

Washington (AVIATION Bureau) — Aircraft production planning late last month was unsettled and, at press time all concerned except a few manufacturers who were up with or in front of their schedules were displeased.

Production by numbers of units went along much as planned for the three months July, August, September, but in October it fell off by some 250 planes.

The War Production Board and the President attributed this drop to one thing: the shift from light combat and training craft to heavy bombers. The board, by reporting production in dollar value instead of in units, was able to announce an increase of 10 percent for September. In addition to the shift to heavy bombers, the air services and Ordance are shifting to heavier armor, higher power guns, and all-round harder-hitting qualities.

Airplane production was not going ahead to suit the services or the board. The President had found it necessary to explain to the public why the 60,000 goal would not be reached this year, and then the board had to shift from units to dollars to avoid stirring up a murmur.

In fact, the unsatisfactory airplane program was one reason why, three months back, WPB Chairman Donald Nelson found it necessary to bring in two vice-chairmen on materials and production, C. E. Wilson and Ferdinand Eberstadt. It was recalled that Wilson was made personally responsible for aircraft production and that Merril C. Meigs, head of WPB's aircraft section, resigned

There is no report in Washington of blame for any airplane, engine or propeller manufacturer. President Roosevelt himself was delighted with what he saw of the industry, and so are most other war leaders.

The shift to heavy airplanes, as explained by both the President and WPB, is the result of developing strategy rather than of any errors of judgment. In fact it is regarded as good news that the industry is adjusting so readily to experience at the fronts.

But that is not the whole story. The disbalance of material supplies of recent months took its toll of airplane output. Some plants were down as much as 25 and 30 percent for lack of supplies. In addition to their old shortages, plants ran out of aluminum and other metal shapes, special steels and alloys. The output of propellers is barely keeping up with engines, and it seems likely it will have to be boosted to meet the expected rise in the airplane production rate.

Definite measures have already been taken to balance the flow of materials so that airplane production can catch up with the rate it should have attained by early 1943.

But that still will not be enough, it is said here. The military importance of airplanes is increasingly recognized from day to day, and the administration is in the process of again increasing the program in some categories.

Since the entire supply of materials is allocated to various equipment and weapons now, there is no way to increase the airplane program without taking materials away from something else. This is difficult, because ordnance and shipping officers do not want to give up anything. It is unofficially said that the high command has its eye on tanks, among other munitions, for curtailment in favor of aviation.

New Interstate Plant

Conversion of the Arlington Furniture Company's Midwest plant to the manufacture of a new type plastic-plywood airplane for the United States Navy was announced by the Interstate Aircraft & Engineering Corp. The West Coast firm has leased the property from Defense Plant Corp., and is preparing what was called the "longest assembly line in the furniture industry" for mass production of the new Navy plane, details of which have not been released.

Subcontractors for the new plant will be the Rudolph Wurlitzer Company, piano and organ manufacturers, and a Singer Sewing Machine plant. Both firms are converting production facilities to manufacture assemblies for the new Interstate plane. The West Coast plant of the Interstate Corp. will continue production of hydraulic units and armament.

Personnel changes prompted by establishment of the Midwest plant, announced by President Don P. Smith, include C. W. Burst, plant manager; W. E. Hirtensteiner, vice-president in charge of producion; and Manley R. Sackett, personnel manager. The latter is replaced in the West by Thomas Trevorrow. L. B. Cameron is now secretary and treasurer and Walter A. Hite is vice-president in charge of engineering.

GM Steps Up Production

Over half the war manufacturing at General Motors' 104 plants is for the air forces of the United Nations, the company reports. The current rate of war production is more than $7,000,000 a day. This includes the liquid-cooled Allison engine which powers airplanes now numbered in five figures. Allison received its first quantity order for engines in 1939.

Two other divisions—Buick and Chevrolet—are in production on Pratt & Whitney engines. Eastern Aircraft Division, with five converted automobile plants, is producing the Grumman F4F *Wildcat* fighter and the TBF *Avenger* torpedo bomber, while Fisher Body is turning out airframe assemblies for North American B-25 bombers. Fisher is also producing parts and instruments for the Boeing *Flying Fortress*.

A new type variable pitch propeller is in production at Aeroproducts division and the Frigidaire division makes propellers, aircraft machine guns, bomb rack and harness assemblies, auxiliary gas tanks, hydraulic valve assemblies and other parts.

Special WPB Group For Aircraft Industry

Washington (AVIATION Bureau)—To assist in doubling aircraft production during 1943, WPB Chairman Donald M. Nelson is setting up a "little WPB" for the aircraft industry under the chairmanship of Charles E. Wilson, former president of the General Electric Company and now vice-chairman of WPB in charge of production.

Members of the board thus far selected to work with Mr. Wilson include Harold Talbot, head of WPB's Aircraft Production Division; Rear Adm. Ralph E. Davison, Navy Bureau of Aeronautics; and Maj.-Gen. Oliver Echols, A.A.F.

Next year's production schedule involves more than mere numerical doubling of units, for tonnage of aircraft to be built will also be increased. One of the prime jobs of the committee, Mr. Nelson explained, will be to expedite materials needed to make design changes which will result from experience gained in the field. Offensive warfare, he pointed out, increases the number of such changes which must be made.

Additional plant facilities may be required to meet the production schedule, Mr. Nelson said, but new construction will not be inaugurated until all existing facilities are used.

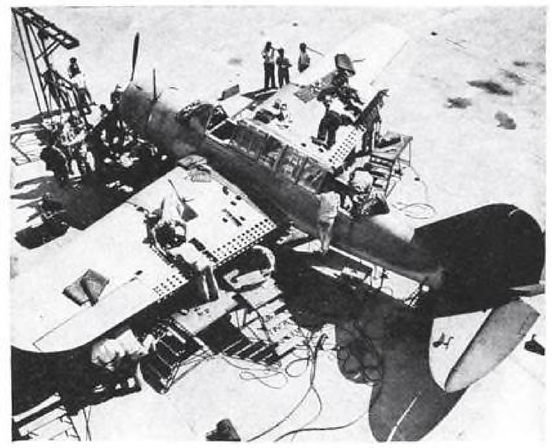

FINAL CHECK-UP

Workers swarm over a new Brewster dive bomber, giving it final touches and rigid inspection before dispatching it to a fighting front. Note the perforated dive brakes along the trailing edge of the wing.

Jouett Heads Higgins Aviation Division; Aero Chamber Hard Hit by Resignations

Washington (AVIATION Bureau)—Reorganization of the Aeronautical Chamber of Commerce, following a shake-up of recent weeks, probably will be completed around the first of the year. Sources inside the Chamber said they believed the organization would be more efficient and more useful in future than it has ever been.

Col. John H. Jouett resigned when reorganization started and joined Andrew J. Higgins, combat boat builder, as head of the new aviation division which has a contract to build 1,200 cargo airplanes. Col. Jouett was a pilot in the World War, and has been a successful aviation executive ever since. Seemingly everybody, in the Chamber and out of it, praised his work there.

By late last month, nearly all major members of the Chamber had resigned, and were holding meetings here to discuss reorganization. Some had advocated abolition of the old group, and the setting up of a new one.

Deliberations were closed to the press, but participants had complained: (1) That dues were getting too high, since they are prorated on the manufacturer's output, (2) the Chamber was expanding out of proportion to the services it rendered, (3) the Chamber failed to furnish members adequate information about Army, Navy and government war control orders, (4) many air schools, parts manufacturers, and other "outsiders" and non-technical members had been admitted, so that airframe, engine, and propeller makers felt the Chamber was no longer representative of their interests.

Persons in the Chamber contend the fault was not all theirs. They said the various interests in the industry had disagreed as to group policy: that military officials had stood in the way of their aims; and that the war itself had inevitably thrown the Chamber's relations with its members out of balance.

Bell to Vote on Retirement Plan

Bell Aircraft Corporation has called a special stockholders meeting for Dec. 16 to vote on a retirement plan for employees reaching age 60.

If approved, the plan will become effective Dec. 31, and will include 800 employees.

In a letter to stockholders, Lawrence D. Bell, president, said, "The directors believe it is distinctly to the interest of the company to recognize key employees who are giving their best years to the company, by making some provision for their welfare after retirement. This should result in greater effort and efficiency."

Cargo Reseach Group Set up By Coast Builders, Carriers

Aircraft builders and transport operators on the West Coast have organized the Air Cargo Research Association, with Thomas Wolf, vice-president of traffic, Western Air Lines, as chairman. Other officers are: J. F. Hall, North American Aviation, first vice-chairman; Gordon Brown, Douglas Aircraft Co., second vice-chairman; J. B. Sheehan, Lockheed Aircraft Co., secretary-treasurer; and W. A. Lippman, secretary.

Purpose is to recommend procedures to promote efficiency.

TRAVELING SAFETY SHOP

Safety Attendant Neil Tierney fits new safety glasses for Ruth Crump at Vega Aircraft Corp. The special "goggle cart" was designed to promote wearing of eye protectors and to give Vega workers better service.

ASSEMBLY LINES . . . By Dorsey Adams

Packard says it has a long lead over all other war plants in the country in the total number of honors to individual workers awarded to date by Donald M. Nelson's War Production Drive Headquarters for suggestions to speed American war production. For the second consecutive time, Packard topped the nation in number of Washington awards for production shortcuts. Winning suggestions from Packard war workers will speed their output of Rolls-Royce aircraft engines for American *Warhawks* and British *Spitfires and Hurricanes*, and of Packard marine engines for PT boats.

Thin sheets of waterproof film are speeding the flow of airplanes and other military equipment to the United State services. Goodyear chemists in cooperation with engineers of the Peerless Photo Products Co. have developed an emulsified Pliofilm which has the property of maintaining its exact size under all conditions of wetting and handling. Known as Transphoto fil.n, it is being used throughout the aircraft and other industries to speed fabrication of templates for war-expanding factories, saving thousands of man-hours needed to make the templates. Two distinct advantages claimed for the Pliofilm process in cutting time for production of military equipment are: (1) No initial investment for equipment is required aside from trays or shallow tanks to hold the liquids in which the transfer sheets are immersed, and (2) the process can be used anywhere without regard for light or sun exposure.

Some 2,000 workmen are busy with the manufacture of metallurgic as well as plastic products at the firm of Impasal Metalurgica y Plastica in Buenos Aires. In September of 1941 the original design for a low-winged plywood trainer was developed by this firm. At the end of October the first experimental airplane, IMPA RR-11, was completed. The lack of steel and light alloys induced the concern to eliminate them as far as possible, which resulted in more economical construction, rapidity of fabrication, and ease of maintenance. The RR-11 is a low-wing cantilever monoplane, built entirely of wood. The landing gear is monopost cantilever type using rubber shock rings which work on compression. The plane is powered by a 65-hp Lycoming engine, which gives it a speed of 162 kph; cruising speed, 155 kph; range of 5 hr; ceiling, 5,000 meters.

"Aero Recovery" grades of lumber from which pieces of aircraft quality can be "recovered" by remanufacture, had maximum prices set up by OPA in Amendment No. 2 to Maximum Price Regulation 109, which covers aircraft spruce lumber.

Several suggestions which won prizes in Northrop's War Production Drive Suggestion Contest were forwarded to Washington for entry in the national contest and three of them received awards of Honorable Mention and for Individual Production Merit in the national competition. The three Norcrafters' suggestions were: Tubing cutter; multiple saw stop; sketch covering gas tank installation. Considerable difficulty was experienced in assembling and adjusting bomb bay doors on the V-72 until a remedy was found. Drawings were prepared of wooden frames that could be fitted in the front and rear of the bomb compartment to hold the doors in the proper position while adjusting was done. These frames save at least five man-hours per plane.

From Lisbon, Spain, comes the report of the successful use of cork tires for airplane landing gear after a trial flight authorized by the Military Aviation Command. The plane took off and landed normally on the tires invented by Adalberto Teles Monteiro. The test pilot reported that he noted only a slight vibration on landing and taking off and Monteiro says that the trouble can be eliminated.

Two engineering advancements that will speed U.S. mastery of the skies

WHAT FOLLOWS is submitted by the men who comprise the "Northrop group"... men devoting every workable hour to hurrying the design and construction of U. S. warplanes ...men who claim no special credit for our country's progress toward air victory.

The U. S. Air Program is rolling. Here are two new engineering techniques that are speeding U. S. progress in developing new designs. And converting these designs into finished fighting planes *faster*.

First, may we tell you about *"Heliarc" welding?* Telling about this process cannot give aid to the enemy because it depends on the strange gas *Helium*—of which the U. S. A. has 98% of the world's supply.

Before this new development, natural aircraft metals such as magnesium and stainless steel were difficult to fabricate into aircraft structures—because it was not practical by ordinary methods to arc-weld two pieces of such metal together.

Engineers at Northrop, some months ago, discovered that *these metals under a Helium jet become weldable.* Northrop has turned the process over to the industry. It removes one hurdle on the road to the all-welded airplane.

The second new technique concerns a method of *faster tooling* for production of new-design U. S. airplanes. If we can *tool faster* than the Axis we can get new improved U. S. fighters and bombers into the air while the enemy's new designs are still unfinished in his plants.

And WE ARE *tooling faster. For example, from the Northrop group has come a new technique of template making that* SAVES THOUSANDS OF MAN HOURS *in tooling for a typical new U. S. design. This process saves five weeks in getting a new U. S. fighter onto the battlefront. As with Helium welding, this process has been turned over to the entire aircraft industry.*

These are merely examples. Additional new processes and new devices are coming from Northrop and also from other aircraft companies. And every major development is made available to all U. S. airplane builders. It is one reason the U. S. airplane-building program is getting places today.

NORTHROP AIRCRAFT, *Inc.*

Northrop Field, Hawthorne, California

MEMBER AIRCRAFT WAR PRODUCTION COUNCIL, INC.

Victor No. 1

Over 15,000 Combination Welding and Cutting Units like the one here illustrated now enter the services of our armed forces.

This VICTOR Aircraft Maintenance Unit No. 1 has been specially designed to meet the most stringent specifications for operating accuracy, maintenance simplicity and trouble-free service life.

A 64-page, multi-color, VICTOR Apparatus Catalog will gladly be furnished, free of charge, upon request.

VICTOR EQUIPMENT COMPANY

844-854 FOLSOM STREET • SAN FRANCISCO, CALIFORNIA

Here it is!

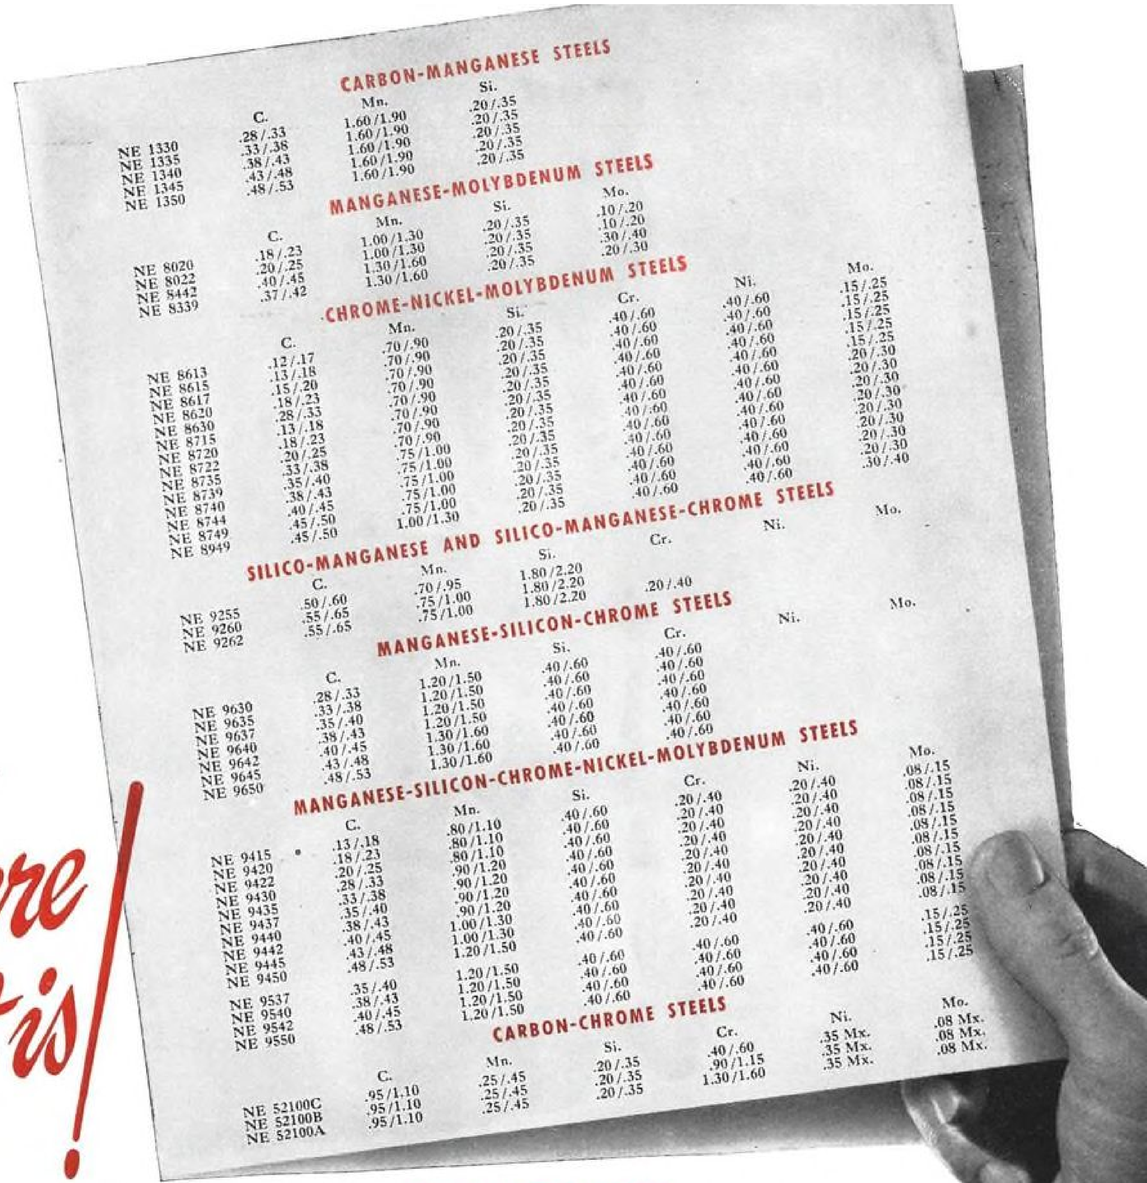

CARBON-MANGANESE STEELS

	C.	Mn.	Si.
NE 1330	.28/.33	1.60/1.90	.20/.35
NE 1335	.33/.38	1.60/1.90	.20/.35
NE 1340	.38/.43	1.60/1.90	.20/.35
NE 1345	.43/.48	1.60/1.90	.20/.35
NE 1350	.48/.53	1.60/1.90	.20/.35

MANGANESE-MOLYBDENUM STEELS

	C.	Mn.	Si.	Mo.
NE 8020	.18/.23	1.00/1.30	.20/.35	.10/.20
NE 8022	.20/.25	1.00/1.30	.20/.35	.10/.20
NE 8442	.40/.45	1.30/1.60	.20/.35	.30/.40
NE 8339	.37/.42	1.30/1.60	.20/.35	.20/.30

CHROME-NICKEL-MOLYBDENUM STEELS

	C.	Mn.	Si.	Cr.	Ni.	Mo.
NE 8613	.12/.17	.70/.90	.20/.35	.40/.60	.40/.60	.15/.25
NE 8615	.13/.18	.70/.90	.20/.35	.40/.60	.40/.60	.15/.25
NE 8617	.15/.20	.70/.90	.20/.35	.40/.60	.40/.60	.15/.25
NE 8620	.18/.23	.70/.90	.20/.35	.40/.60	.40/.60	.15/.25
NE 8630	.28/.33	.70/.90	.20/.35	.40/.60	.40/.60	.20/.30
NE 8715	.13/.18	.70/.90	.20/.35	.40/.60	.40/.60	.20/.30
NE 8720	.18/.23	.70/.90	.20/.35	.40/.60	.40/.60	.20/.30
NE 8722	.20/.25	.75/1.00	.20/.35	.40/.60	.40/.60	.20/.30
NE 8735	.33/.38	.75/1.00	.20/.35	.40/.60	.40/.60	.20/.30
NE 8739	.35/.40	.75/1.00	.20/.35	.40/.60	.40/.60	.20/.30
NE 8740	.38/.43	.75/1.00	.20/.35	.40/.60	.40/.60	.20/.30
NE 8744	.40/.45	.75/1.00	.20/.35	.40/.60	.40/.60	.30/.40
NE 8749	.45/.50	1.00/1.30				
NE 8949	.45/.50					

SILICO-MANGANESE AND SILICO-MANGANESE-CHROME STEELS

	C.	Mn.	Si.	Cr.	Ni.	Mo.
NE 9255	.50/.60	.70/.95	1.80/2.20	.20/.40		
NE 9260	.55/.65	.75/1.00	1.80/2.20			
NE 9262	.55/.65	.75/1.00	1.80/2.20			

MANGANESE-SILICON-CHROME STEELS

	C.	Mn.	Si.	Cr.	Ni.	Mo.
NE 9630	.28/.33	1.20/1.50	.40/.60	.40/.60		
NE 9635	.33/.38	1.20/1.50	.40/.60	.40/.60		
NE 9637	.35/.40	1.20/1.50	.40/.60	.40/.60		
NE 9640	.38/.43	1.20/1.50	.40/.60	.40/.60		
NE 9642	.40/.45	1.30/1.60	.40/.60	.40/.60		
NE 9645	.43/.48	1.30/1.60				
NE 9650	.48/.53	1.30/1.60				

MANGANESE-SILICON-CHROME-NICKEL-MOLYBDENUM STEELS

	C.	Mn.	Si.	Cr.	Ni.	Mo.
NE 9415	.13/.18	.80/1.10	.40/.60	.20/.40	.20/.40	.08/.15
NE 9420	.18/.23	.80/1.10	.40/.60	.20/.40	.20/.40	.08/.15
NE 9422	.20/.25	.80/1.10	.40/.60	.20/.40	.20/.40	.08/.15
NE 9430	.28/.33	.90/1.20	.40/.60	.20/.40	.20/.40	.08/.15
NE 9435	.33/.38	.90/1.20	.40/.60	.20/.40	.20/.40	.08/.15
NE 9437	.35/.40	.90/1.20	.40/.60	.20/.40	.20/.40	.08/.15
NE 9440	.38/.43	.90/1.20	.40/.60	.20/.40	.20/.40	.08/.15
NE 9442	.40/.45	1.00/1.30	.40/.60	.40/.60	.40/.60	.15/.25
NE 9445	.43/.48	1.00/1.30	.40/.60	.40/.60	.40/.60	.15/.25
NE 9450	.48/.53	1.20/1.50	.40/.60	.40/.60	.40/.60	.15/.25
NE 9537	.35/.40	1.20/1.50	.40/.60	.40/.60		
NE 9540	.38/.43	1.20/1.50	.40/.60	.40/.60		
NE 9542	.40/.45	1.20/1.50	.40/.60	.40/.60		
NE 9550	.48/.53	1.20/1.50	.40/.60	.40/.60		

CARBON-CHROME STEELS

	C.	Mn.	Si.	Cr.	Ni.	Mo.
NE 52100C	.95/1.10	.25/.45	.20/.35	.40/.60	.35 Mx.	.08 Mx.
NE 52100B	.95/1.10	.25/.45	.20/.35	.90/1.15	.35 Mx.	.08 Mx.
NE 52100A	.95/1.10	.25/.45	.20/.35	1.30/1.60	.35 Mx.	.08 Mx.

THE LATEST AND COMPLETE LIST OF NATIONAL EMERGENCY (NE) STEELS*

If we can help you in selecting and applying these steels to your requirements, don't hesitate to call on us. The services of our metallurgists are freely at your disposal. This offer is open to every user of Carnegie-Illinois Steels and to every manufacturer of war equipment.

*As published September, 1942 by the American Iron and Steel Institute, as "Contributions to the Metallurgy of Steel," Pamphlet No. 8—Supplementary National Emergency Steels.

U·S·S Carilloy dependable Alloy Steels

CARNEGIE-ILLINOIS STEEL CORPORATION

Pittsburgh and Chicago

Columbia Steel Company, San Francisco, *Pacific Coast Distributors*

United States Steel Export Company, New York

UNITED STATES STEEL

Panagra Wants Terminal Stations in U. S.

Washington (AVIATION Bureau)—A serious air transport bottleneck has developed between this country and the Caribbean region. One obvious reason is lack of sufficient equipment to move bulging war traffic.

The Civil Aeronautics Board recently issued an invitation to any qualified companies to apply for route certificates.

Evidently the board believes there might be operators suitably situated who could take equipment from other services for new routes which it might authorize. CAB invited foreign applicants as well as domestic.

Twelve or fourteen applications already had been received at this writing. Among them were Eastern Air Transport, KLM (Royal Dutch Air Lines), British West Indian, TACA (associated with BWI), National Airlines of Florida and the Gulf, and others.

It is expected of course that Pan American Airways contend that if it were given the necessary equipment, it could carry the traffic with less overhead cost than would be incurred by a number of newcomers. Officials of CAB decline to comment in advance.

The invitation to make applications for Caribbean routes is in reality a move to make a survey of the bottleneck, and to determine to what extent equipment on existing services could be moved to new services with advantages to the war effort. The board fully realizes that all equipment and personnel are already employed. No specific routes were set up in the invitation. Hearings will bring out facts as to the need for additional service and these might influence the War Production Board and the Army to allocate more new planes to any new services that may be established.

Another factor in the inter-American air bottleneck is an action instituted by CAB to determine whether the certificate of Pan American-Grace should be amended to include one or more termini in the United States, with choice between Miami, Tampa, New Orleans, Brownsville, El Paso, or Los Angeles.

Panagra operates between Balboa, C. Z., and Buenos Aires via the West Coast of South America. Panagra is owned 50 percent by W. R. Grace Company and 50 percent by Pan American Airways. Panagra's natural desire for a terminal in the United States proper is augmented by the fact that much of its traffic must come to it over Pan American's routes southward out of the U. S. The two associated companies are said to have had disagreements over this question, and over the division of traffic between the West Coast, and the East Coast, which is flown by PAA. They will oppose each other in the board's proceedings.

According to the board's order, the Grace ownership claims that Panagra, because of the opposition of its 50 percent Pan American stockholders, is not authorized by its directors to make application for an amendment providing for a Panagra terminal in the U. S. Thus, the action was initiated by the government.

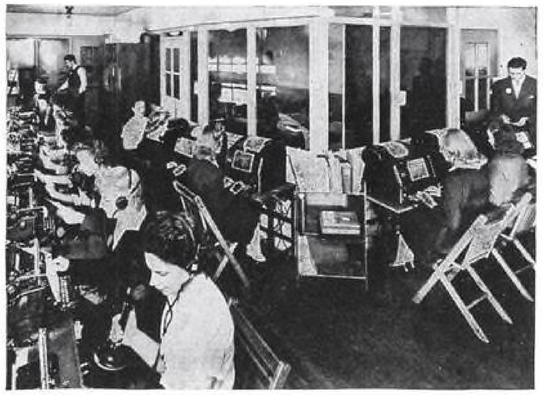

WOMEN TRAIN FOR AIRLINES

Feminine voices will soon be heard on the air lines' air waves, as is shown by this group of students at United Air Lines' Boeing School of Aeronautics, where the young women are training to become teletype and radio operators, to work alongside men in the company's communications centers.

Military Return Flights Bring U. S. Vital Goods

Now it can be told that the Army's Air Transport Command is flying strategic goods on return trips to the United States. The announcement was withheld by the Army's censor until substantial shipments of several badly needed materials had built up stocks within the country.

The assembly system worked out by the Bureau of Economic Warfare with its branches all over the world made this service possible. For example, BEW set up stations in the Far East, where scarce metals are assembled from scattered points in China for air transport to the United States.

China National Aviation (Pan American Airways) carries bristles, tungsten, silk and tin to airports in China, from where they are taken to this country by Army or Navy. In eight weeks, 150 tons of these items plus 70 tons of tungsten were moved from China to India. Later, 98 tons of tungsten were flown out in ten days.

The Army transport system includes oversea operations by United Air Lines, Eastern Air Lines, TWA, American Airlines and others, furnishing their own personnel and using government-owned equipment. The Navy has contracts with American Export Airlines and others.

ALL-CARGO ROUTE TO SOUTH AMERICA

Unloading at Lima, Peru, is a Panagra plane operating on the first international air cargo service to be certified by the CAB. Specially fitted to carry only freight, the planes maintain schedules between Balboa, C. Z., Lima and intermediate points. Up to 15 tons of merchandise have been moved in a week since the service was inaugurated.

Airlines Radio School

At Wesleyan College, Iowa, a radio extension course in air transportation to prepare students for job opportunities in the coming flying age is under way. Nearly 20,000 students regularly around classroom radios in Iowa, Illinois and Missouri to hear nationally known aviation authorities explain how the airplane in the postwar period will change the living habits and standards. The Wesleyan Aviation Course, established in collaboration with Transcontinental and Western Air, will continue through April.

All-Cargo Flights Here

United Air Lines' Flight 15 is operating as an all-cargo trip between New York and Salt City as a means of expediting critically needed war materials. United had experimented with all-cargo flights in the past, with the intention of gaining experience for future use. Eastern Air Lines also is making a daily cargo trip between New York and Miami.

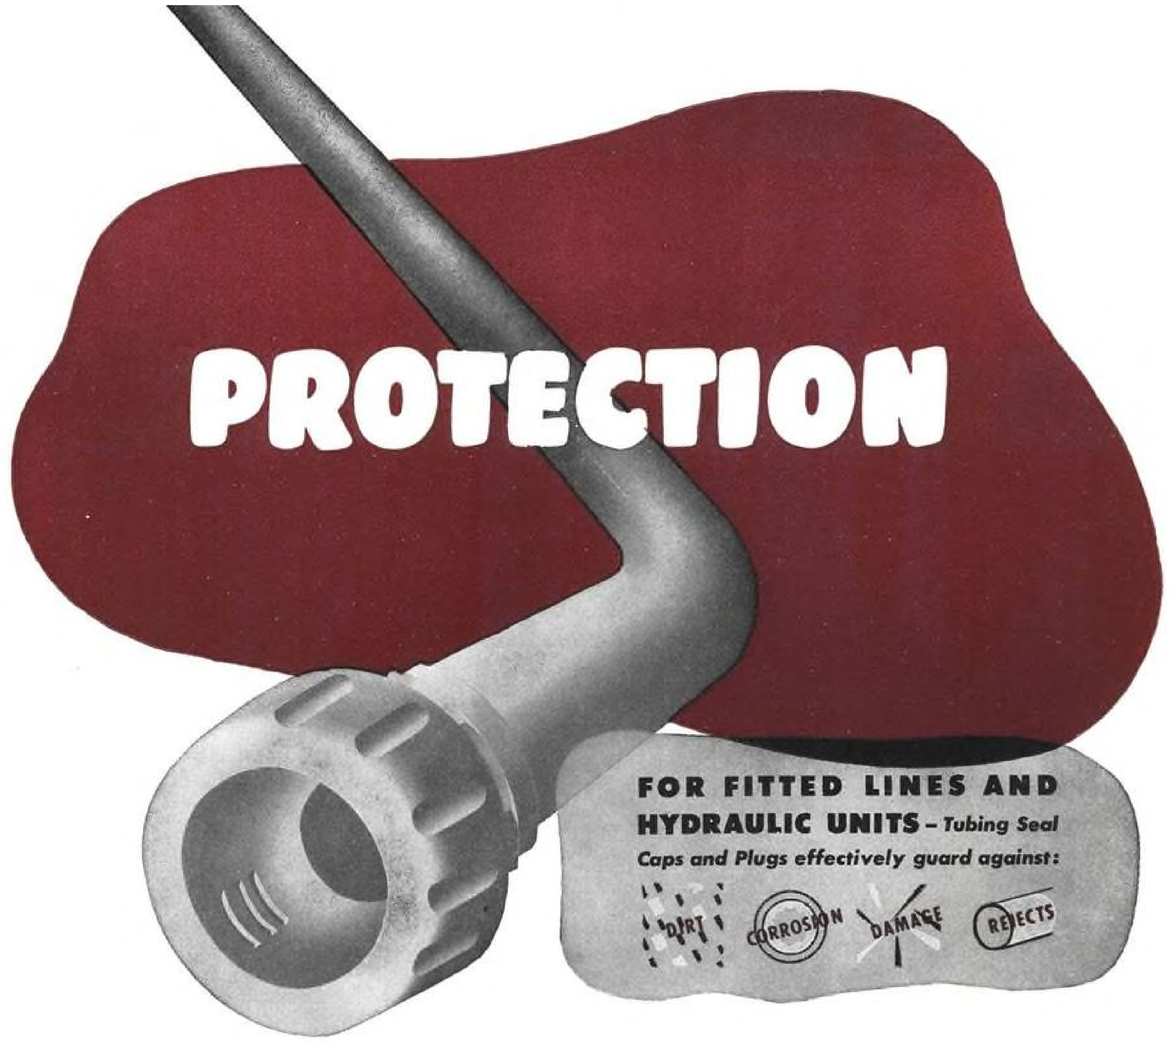

RE-USABLE MANY TIMES, being of cadmium plated metal, Tubing Seal Caps and Plugs are the most efficient, most economical protectors available, are easily and speedily spun on to fitted lines and hydraulic units, and tightened by hand. They seal under pressure, completely protect couplings, BT nuts, threads, beaded or flared ends.

Leading aircraft plants* use and *re-use* Tubing Seal Caps and Plugs to completely seal out dirt, dust, moisture, to prevent corrosion and handling knocks-and-shocks, to reduce rejects, and, when desirable, to seal fluids in hydraulic lines and units. Available for Parker and SAE (AN) fittings. Send for 10 page file size booklet "Tubing and Pipe Protection Methods."

TUBING SEAL-CAP, INC.
215 W. 7th STREET, LOS ANGELES
East. Representative, 428 New Center Bldg., Detroit

*Used by Douglas, Boeing, North American, Northrop, Vega, Interstate, Murray Corp., Paul G. Wegner and many others.

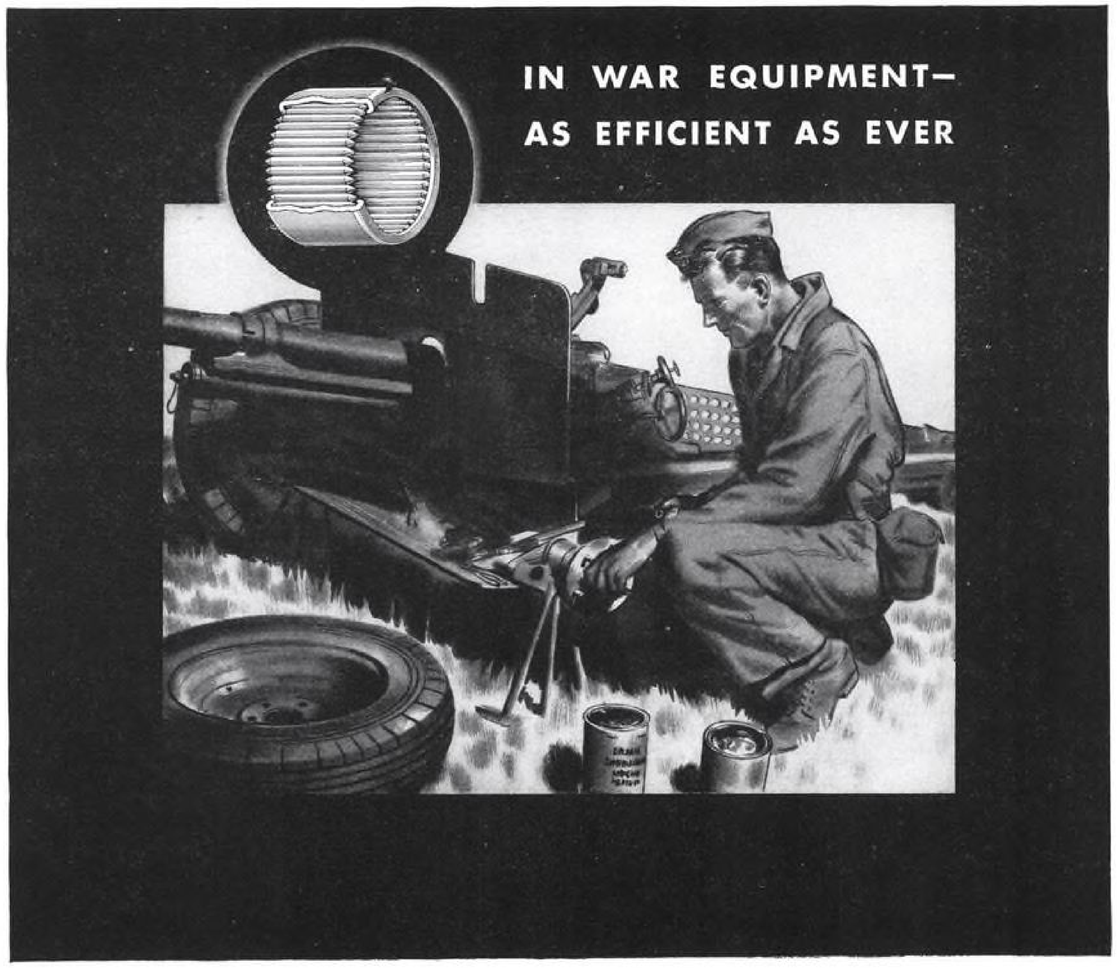

TODAY it may be an anti-tank gun, stripped for check-up…tomorrow, the still-warm "heart" of a fighter plane. So it goes. Fighting equipment gets tough treatment in modern warfare. So the need for frequent servicing and constant parts replacement is understandable.

But there is one vital part which maintenance men seldom have to touch, although they notice it often enough. The Torrington Needle Bearing, "changed over" to production-for-war, is again demonstrating its efficiency—and adaptability—in applications where its unique advantages mean more today than ever.

Its efficient system of lubrication, for example, which requires only occasional oiling, is reducing the need for maintenance attention or replacement. Its high capacity assures long bearing life, even in continuous operation under heavy loads.

Every feature of the Needle Bearing, significantly, is filling some important wartime need. Its small size is saving weight and critical materials; its remarkable ease of installation is cutting assembly time; its simplified design is eliminating extra parts and assembly steps, with low coefficient of friction assuring smooth performance.

When Victory may hang on the amount of time it takes to service fighting equipment, it is not surprising that maintenance men these days are finding Torrington Needle Bearings in more and more of America's war materiel.

IF YOU HAVE A PROBLEM which the Needle Bearing might solve, Torrington engineers can be of valuable assistance in adapting its advantages to your needs. You are welcome to their experience, as well as the information on Needle Bearing capacities and sizes in Catalog No. 114.

LET'S GO U.S.A. KEEP 'EM FLYING!

THE TORRINGTON COMPANY
TORRINGTON, CONN., U. S. A. • *Established 1866*
Makers of Needle and Ball Bearings
New York · Boston · Philadelphia · Detroit
Cleveland · Seattle · Chicago · Los Angeles
San Francisco · Toronto · London, England

TORRINGTON NEEDLE BEARING
Every feature fills a wartime need

10 Distinct Advantages
OF REPUBLIC ELECTRUNITE AIRCRAFT TUBING

Because it is made from *flat-rolled* steel, cold-formed to tubular shape and then *electric resistance welded,* Republic ELECTRUNITE Aircraft Tubing offers ten distinct advantages—many of them not consistently obtainable by other processes.

1. **Uniform Diameter**
2. **Uniform Wall Thickness**
3. **Uniform Concentricity**
4. **Uniform Strength (*with a weld as strong as the wall*)**
5. **Uniform Weight**
6. **Uniform Ductility**
7. **Uniform Hardness**
8. **Uniform Weldability**
9. **Uniform Scale-Free Surface**

The 10th advantage is *uniform freedom from all injurious defects*—insured by test of every length by a specially-developed non-destructive electric method.

Republic ELECTRUNITE Aircraft Tubing meets specification standards of the U. S. Army Air Corps; Bureau of Aeronautics, U. S. Navy; and the Civil Aeronautics Administration.

It is made of S.A.E. X-4130 steel in sizes from ⅜" O.D. to 1⅝" O.D.—.028" to .065" wall; of S.A.E. 1025 steel in sizes from ⅜" O.D. to 4" O.D.—.028" to .148" wall; and of ENDURO* Stainless Steel in standard analyses in sizes from ⅜" O.D. to 3" O.D.—.028" to .120" wall.

Write for further information.

STEEL AND TUBES DIVISION
REPUBLIC STEEL CORPORATION
CLEVELAND • OHIO
Berger Manufacturing Division • Niles Steel Products Division
Union Drawn Steel Division • Culvert Division • Truscon Steel Company
Export Department: Chrysler Building, New York, New York

Republic

ELECTRUNITE
Reg. U. S. Pat. Off.

ELECTRIC RESISTANCE WELDED TUBING

Also Boiler Tubes • • • Condenser and Heat Exchanger Tubes

*Reg. U. S. Pat. Off.

SQUARELY
MEETING THE NEED

GENERAL CONTROLS AIRCRAFT TYPE VALVES DO IT *Electrically*

SIMPLIFY Save time, money, weight, space and man-hours as well as simplify installation and pilot supervisory operations with General Controls hi-g electromagnetic valves... General Controls 2, 3 and 4-way hydraulic valves handle up to 3000 lbs. or more, with flows from pilot flow to 16 g.p.m. or more... General Controls anti-icing valves are lowest in weight for use in simplified anti-icing control systems... General Controls gasoline valves are available up to 2" in size, with low head loss... General Controls valves for air and gases are also available up to 2" in size and for pressures to 3000 lbs., with high flows and low head loss ... Standard valves will meet requirements of most applications. For valves and special valve arrangements, write or wire our Engineering Department.

Above: Type AV-7, 4-way selector valve.

Above: Type AV-14, hydraulic selector valve.

Above: Type AV-5, electric diaphragm valve.

hi-g

✲TRADE MARK—hi-g indicates positive ability to operate in any position regardless of vibration, change of motion or acceleration.

WRITE FOR ILLUSTRATED & DESCRIPTIVE BULLETIN

GENERAL CONTROLS

PIONEERS AND LEADERS IN THE DEVELOPMENT AND MANUFACTURE OF MAGNETIC VALVES

801 ALLEN AVENUE, GLENDALE, CALIFORNIA

BOSTON • NEW YORK • PHILADELPHIA • DETROIT
CHICAGO • CLEVELAND • DALLAS • SAN FRANCISCO

THROTTLING the Axis Monster!

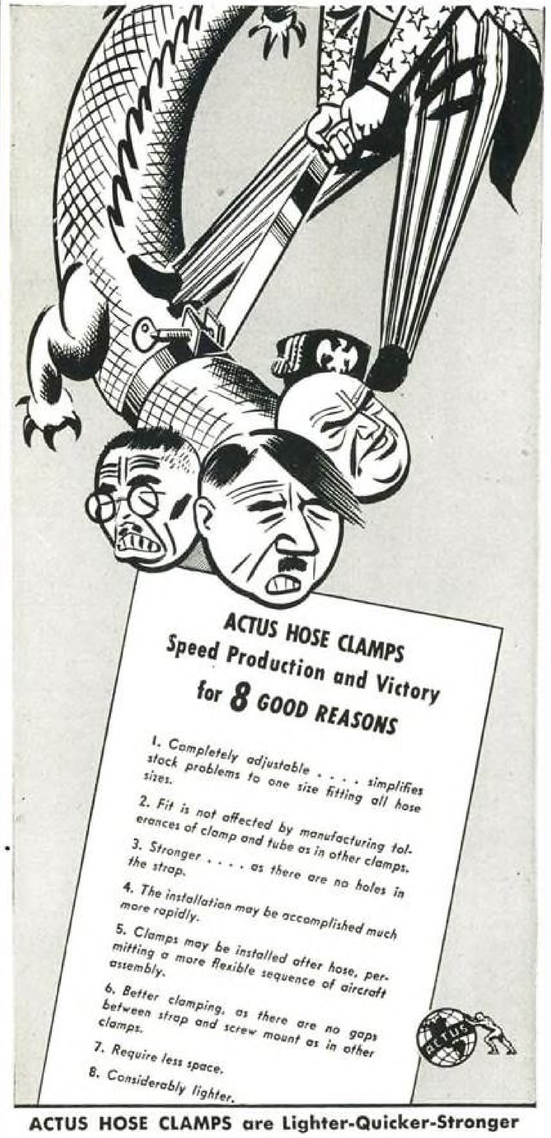

ACTUS HOSE CLAMPS are Lighter-Quicker-Stronger

Used by United States, Canada, Great Britain on Land, Sea and Air Fighting Equipment

ACTUS PRODUCTS CORP.
MOUNT VERNON, NEW YORK

Economics of Large-Scale Raids

With bombing raids getting larger and larger both in number of aircraft and bombs, the observer often questions the economics of the 1,000-plane raids, especially where losses in men and aircraft are concerned. The United States Air Forces so far have not made any raids which would compare with the 1,000-bomber excursions which the RAF has made to key points in Germany, and the following figures therefore are good only for the British methods of large-scale raids.

Current expenditures for the war in Britain are hitting $50,000,000 a day, and every 1,000-plus raid slices about $14,000,000 out of the budget. This amount is computed on the basis of a 5 percent plane loss—which adds up to $11,-250,000—the cost of training the lost crews is figured at some $1,300,000 and bombs and gasoline used complete the item. The figures do not include pay to the returning crews, upkeep and repair of the aircraft and the payments to the members of the ground crew.

It is generally felt that a large bomber of the *Lancaster* class will cost about $300,000, while one of the lighter types will run around half that. Training of crews is costing the Empire around $4,000 per man, and the seven-man crew of a *Stirling* therefore represents an investment of $28,000, or $28,000,000 for the 1,000 planes of a large-scale raid.

Photographs made by RAF observation planes have indicated that this cost is well worth while, since damage to enemy territory, especially if long-term damage is figured out, generally runs many times the original outlay.

Brazilian Treasure Hunt

Out of Brazil comes a story of the successful treasure hunt for an American bomber forced down in the jungle 80 mi. south of the Amazon estuary. The airplane made a miraculous forced landing in a small clearing in July, and came down completely undamaged. By air the location was about 20 min. from Belem, but it took the crew some eleven days of hard work to get there through the steaming tangle of trees. With the cooperation of the Brazilian Air Force, Pan American Airways' employees managed to relocate the airplane, find the exact course from their camp to the plane and arrive four days later in the small clearing. A few days later a full-scale recovery crew set out for the plane, and started work on Aug. 10 to clear a takeoff strip. With some 54 natives and an additional 50 men sent from Belem, fed with fresh food dropped every other day from an airplane, a runway was cleared and completed by Sept. 3. Only casualty in the adventure was M. de la Torre of Panam who picked up malaria.

New Nazi Army Cooperation Plane

Appearing on the Eastern front for the first time is the Henschel 129, a low wing twin-engine bomber designed for both anti-tank attacks and low-level bombing and strafing raids. The plane, heavily armored around the cockpit, has a 30 mm. cannon and two heavy machine guns for anti-tank work, or two 20 mm. cannon and two lighter machine guns for bombing raids, when a 750-lb. bomb can be carried. Notwithstanding a complete absence of armor around the vital structural parts of the plane and engines, the topspeed is only 275 mph., and experience has indicated that this type of plane can only operate with reasonable success when covered by large numbers of pursuits and fighters.

Postwar Plans

Postwar aircraft provides a subject for discussion when British engineers find time for it. More and more interest is shown in cargo planes, and it is said that 5,000 craft of a size now being built could bring nearly 1,000,000 men to Britain in 15 hr. or move 150,000 tons each way in one week. For regular services a Commonwealth Board of Merchant Air Services has been suggested, which would include the chiefs of air service departments of the participating nations, with international arrangement of rates, schedules, ground facilities, etc. The scheme provides for virtual "freedom of the air," each member-nation being allowed full reciprocal rights in all the other member countries.

Press Association, Inc.

SOVIET "X" FACTORY HUMS

Scores of "Yak" fighters on Soviet "X" factory assembly line. Despite Nazi smashes at Stalingrad and in the Caucasus, Russia is reported to have produced more warplanes in October than in September, bettering quotas.

New de Havilland Development

Latest in the long series of extremely successful aircooled engines built by de Havilland is the *Gipsyqueen* IV, a six-cylinder inverted supercharged aircooled engine. Designed mainly to give better performance in planes mounting older types, and to give training pilots more experience with the complicated controls of a supercharged engine, the *Gipsyqueen* IV, together with the IIIS type variation, gives 300 hp. for takeoff and 180 hp. for cruising at an altitude of 12,000 ft.

Rather remarkable is the fact that these engines are all equipped with a Hamilton Standard license constant speed propeller also built for de Havilland. These propellers are built for engines from 200 hp. up, and variable pitch props are even available for engines of 140 hp. The *Gipsyqueen* IV is now being fitted into the Airspeed *Oxford* IV, which is in large-scale use as a general utility plane in England.

Canadian News

BY JAMES MONTAGNES

It is now possible to state that the secret two-engine fighter being built by de Havilland Aircraft of Canada is the new British *Mosquito* bomber-fighter. Full production of these planes is now under way. The plane is largely constructed of wood, due to a bottleneck in light metal materials. Another wooden or partly wooden plane being built in Canada is a new version of the Avro *Anson*, used in training of bomber pilots and navigators. The aircraft is made of molded plywood, powered with Pratt & Whitney 450-hp. engines. The new model differs from the previous Canadian-built and English *Ansons* in that it has a completely redesigned molded plywood fuselage. The plastic fuselages are being made in western Ontario, and the complete plane will be built under the shadow system controlled by the government-owned Federal Aircraft Ltd. Improvement in the *Anson* is part of an integrated plan to revise British Commonwealth Air Training by placing emphasis on the nagivator as the su-

preme member of the crew of a modern heavy bomber.

An exhibit showing how wartime Canadian industry is meeting a shortage of critical materials, manpower and machinery by new methods of manufacture was held at Toronto recently under the auspices of the Department of Munitions and Supply for war plant executives. Among new production methods exhibited by aircraft manufacturers were a number of methods of molded plywood uses. The rear seat of a de Havilland *Tiger Moth* elementary trainer was formerly made of welded aluminum sheets. Now birch plywood, glued with casein, is being used, making for an annual saving of 5,412 lb. of aluminum. Plywood wing tips for North American *Harvard* advanced trainers are being used to replace tips made of formed and riveted aluminum ribs and sheets. Nose reinforcements for *Harvard* trainers are being made of birch veneers, which are molded into shape in steam pressure tanks.

One of the most spectacular exhibits showing how large sums of money could be saved by seemingly unimportant details was that which showed annual savings of $7,000 in painting rondels on aircraft wings. By stenciling them on, the method is reduced from six operations to one, and money and time are conserved. Federal Aircraft Ltd., government-owned company, showed its annual savings in the new method of applying rondels to aircraft as 35,712 lb. of material, 11,160 hours of labor, worth together $25,668. Manpower and materials saved by this and other new production shortcuts and material savings in 1941 by this company were sufficient to build eleven *Bolingbroke* bombers. Life of airplane tires can be prolonged greatly by retreading the tires with only 14 percent of the crude rubber content of the original tire, rubber experts stated.

Important changes in the operations personnel of Trans-Canada Air Lines have been announced. Capt. B. A. Rawson, former assistant operations superintendent at Toronto, has been named superintendent of flight operations, and will maintain his offices in Winnipeg, and Capt. Frank Young, who was formerly captain in the regular flying service out of Toronto, has been promoted to the position of chief pilot.

N. J. Humphreys has been moved from the post of despatcher at Lethbridge, Alta., to chief despatcher with office at Toronto.

Beauforts Go Into Action

While it has been known for some time that Australian airplane plants were in large-scale production of the new *Beaufort* torpedo bomber, there had been no indications until very recently that these planes had been used in actual attacks upon the enemy. According to the Australian Air Minister, Arthur Drakeford, the planes had been used for some time in observation and light bombing flights along the Australian coasts, and had operated with marked success against submarines. However, a full-scale torpedo attack was made against Jap ships during September with excellent results, so that further forays of this type can be expected in the future.

New Type Cannon Shell

Reports from Moscow indicate that the Germans may be using a new type of cannon shell in their Me-109G's which enables them to open fire at 300 to 500 yd. The main reason for this innovation appears to be the loss of penetrating power of cannon shells at greater distances, which causes the instantaneous fuse to explode the shell before sufficient penetration is available for maximum damage. At the same time the fuse mechanism seems to be a little too delicate on the small calibre cannon (under 37 mm.), and good use of this development comes only in the larger type cannon such as are now used on our *Airacobras*.

Further British Conversions

Instead of sending their obsolete aircraft to the scrap-heap, the British are using them to train their future pilots, tote cargo the world over and torpedo Axis ships in their home waters. Latest in the series is the announcement that the *Hampden* medium bombers have been converted to torpedo planes for the Coastal Command, where their 270-mi. speed and 2,000-mi. range prove extremely useful for the extended patrolling which is now undertaken.

Eire Airline Expands

The Aer Lingus Teoranta, the Irish aviation company, has opened its first internal airline between Dublin and Limerick. The line may be extended to Cork later on. One of its purposes is to provide a more efficient link with the transatlantic services of Pan American and American Export.

ON SCHEDULE . . . by "Vista"

For about seven months the Swedish ABA airline, operating in the face of mounting difficulties, has maintained a night mail service non-stop from Stockholm to Great Britain. At present this line is being operated on a weekly schedule with Junkers 52's, of which the ABA has quite a few, and it is quite remarkable that this service can be maintained over this notoriously bad stretch of territory. It is hoped that eventually the line will be developed into a major passenger route, eliminating the long detour via Holland and Germany which was maintained before 1940.

The word "finis" has been written very effectively across the record of the Italian LATI, notorious spyline which once flew from Brazil to Italy, by Foreign Minister Aranha of Brazil. The State officially took over six large flying boats which LATI had laid up in Rio de Janeiro, and started operations on a new line up the Amazon to rubber plantations which are now being developed. It is rather strange and also pleasing that these planes, which once smuggled money, information and vital war materials across the Atlantic, are now doing their bit to add to our war effort.

Prospects for British Overseas Airways, now beginning to feel the pinch of all out warplane production and normal plane losses, were a little brighter last month. During a discussion in the House of Commons the Secretary of State for Air was asked whether some action was contemplated to increase the number of modern aircraft now available to British Overseas Airways' operations. Sir Archibald Sinclair, long a champion for England's air routes, informed the House in general that such action had already been taken. From all appearances therefore BOAC will soon be able to replace its outmoded and aged planes with something a little faster and safer, which in turn should do the farflung operations a lot of good.

Canadian Civilian Flying Schools

The No. 9 Air Observer School at St. Johns, P. Q., is a typical college of the air, where students undergo intensive and highly technical instruction in a concentrated space of time. Operated by Dominion Skyways (Observers) Ltd., under the supervision of Canadian Pacific Air Lines Ltd., this school forms part of the Empire Air Training Program which must supply the manpower for the coming offensive.

The RCAF part of the show is directed by a ranking air officer known as the chief supervisory officer. The RCAF supplies all the ground instruction and gives the trainees all their theoretical training in the lecture rooms. The Air Force is also responsible for their discipline and administration.

The civilian share in the work of operating the school is controlled by a general manager, and an executive staff. In many instances at Canadian Pacific Air Lines' schools, the executive civilian officers are veterans of World War I, who were members of the old Royal Flying Corps. And their job is a big one—and varied.

Here is what the civilian company must attend to:

1. Supply all the civilian pilots for flying the air navigators on exercises. Most pilots come from Canada and the U. S., or are Sergeant Pilots on leave, and have to be specially trained for this kind of work.
2. Be responsible for the maintenance of all aircraft, supply all radio installations and communications with their operators and upkeep.
3. Supply all catering at the camp.
4. Be responsible for operation and maintenance of all quarters and grounds.
5. Provide all equipment to keep the school going summer and winter.
6. Maintain all necessary safeguards, such as fire-fighters, watchmen, etc.
7. Be responsible for all heating, fuel, transport, stores, and whatever else is needed for the operation of the school. The present camp has about 300 civilian employees, but its size is being doubled, and when expansion is completed the number of planes, instructors and output of trained navigators will be trebled as Canada continues to supply more and more skilled airmen to the United Nations.

First enemy met on icy mornings...

SURGE PRESSURE

CAUSE: Oil thickened by freezing temperatures creates excessive pressure on congealed oil cooler when engine starts.

RELIEF Standard-type pressure relief valve by-passes oil cooler core—but does not protect cooler against possible back-pressure from congealed oil lines!

CURE: A NEW-AND PROVEN-DESIGN FOR "SURGE PROTECTION"



AiResearch Oil Cooling Systems now provide *full, automatic* "Surge-Protection"

UP TO NOW, the surge of cold, thick oil has constantly threatened the oil system during engine starting in sub-zero weather. By-passing has helped some. But unless pressure great enough to clear the congealed oil lines is directed around the oil cooler, surge pressure will back into the oil cooler—collapse the core tubes.

AiResearch mustered its specialized "know how" to lick this problem. The answer developed by our engineers has recently been flight-tested. Complete, automatic "surge-protection" is now an accomplished fact!

AiResearch's "surge-protection" is assured by a pressure sensitive element that *measures* the oil pressure and then *directs* the flow of oil accordingly to safety requirements.

If pressure is excessive, it provides *complete* by-pass through *sealing* the entrance to the oil cooler—protecting it against excessive back pressure. It maintains *safe* pressure in the cooler itself to insure fast thaw-out . . . helps build and maintain full pressure necessary to clear oil lines. And it increases engine safety by assuring proper oil "conditioning" in a minimum amount of time.

Fully automatic, this new "surge-protection" for AiResearch Oil Coolers is now in volume production. Manufacturers, interested in the safety advantages it offers their aircraft, may write or wire for full details.

"Where Controlled Air Does The Job" • Engine Coolant Systems • Automatic Exit Flap Control Systems • Supercharger Aftercooling Systems • Engine Air Intercoolers

WINGS FOR THE CHINA DRAGON

There is new pride in the flight of our symbolic Thunderbird...a pride born with our exclusive appointment to give Chinese Air Force cadets their all-important primary training...a pride shared by every Southwest Airways employee.

It is a responsibility, too—one that we have not...and shall not, bear lightly. Throughout our growth in Arizona's Valley of the Sun to one of the Nation's *largest* primary schools, we have worked constantly with the Army Air Force to develop safer, more efficient training. When Victory is won, these skills will be turned again to peacetime tasks.

But today, our job is clear. We are giving wings to the American Eagle—*and now the dragon shall fly!*

SOUTHWEST AIRWAYS

Phoenix, Arizona

THUNDERBIRD FIELD • FALCON FIELD • SKY HARBOR • THUNDERBIRD II

TRAINING THE FINEST FIGHTERS TODAY, THE FINEST FLYERS TOMORROW

CONTRACTORS TO THE UNITED STATES GOVERNMENT • UNITED STATES ARMY • UNITED KINGDOM GOVERNMENT

NORRIS DEAN JACKSON has been appointed director of labor relations for NWA, a newly created office. Mr. Jackson has been assistant state labor conciliator in Minnesota since 1939; before that was a special conciliator, and member of Minnesota's fact-finding committee. ERNEST W. YORIS, former Seattle police official, was appointed director of internal security. He will have complete charge of all guard and police activities for the system, and will visit cities all along the system to discuss with local authorities the question of security and plant protection.

SELIG ALTSCHUL, financial editor of "Aviation," and second place award winner of TWA's writer's contest, was appointed to the Research and Analysis Division of Civil Aeronautics Board. He will be head analyst of the division and will study air transport problems.

ROBERT D. SPENCER, aeronautical engineer, has joined General Tire as manager of aeronautical sales and engineering, where he will direct all aviation tire design and contact the country's aviation companies as aeronautical sales director. He has been in aviation since 1935.

A. E. SHELTON, formerly works manager of the Stinson Division of Vultee, has been promoted to the newly created position of division manager. Before joining Vultee in February of this year, Mr. Shelton was president and general manager of Menasco, and before that pur. agent of Lockheed.

WILLIAM F. McGRATH, veteran transportation executive and present Eastern regional manager of TWA, was elected president of the Air Lines Terminal Corporation at the stockholders' annual meeting. Formerly in the steamship industry, he joined TWA about two years ago as Eastern traffic manager.

CAPT. E. V. RICKENBACKER, proud owner of a charmed life. After drifting in the Pacific for 24 days he was picked up by a plane so small he had to be lashed to the wing and taxied 40 mi. to a South Pacific base. He is resting before starting out again to complete his mission. All of his party are accounted for.

JEWEL "SKIPPER" STANTON has been appointed primary flight commander in the civilian flying school at Spartan where she will be in charge of the coordination of students, instructors and airplanes in the primary training unit, and as a check pilot she will give flight checks to the students and instructors.

U. S. Navy

REAR ADMIRAL PATRICK N. BELLINGER, one of three temporary rear admirals nominated by President Roosevelt to be permanent rear admirals. Admiral Bellinger is a naval aviator who distinguished himself as commanding officer of the seaplane NC-1 on an overseas flight from Newfoundland to the Azores.

EDWARD G. BERN, has been appointed sales manager for Hughes Aircraft. He is a veteran of World War I and on his return from France he organized and was the first president of Kansas City-Wichita Airways, one of the first airlines established in the U. S. He was pres. of Columbia and regional v. p. of AAL.

Ben Pinchot

I. S. RANDALL, assistant to the chairman of the board of TWA, takes over the post of gen. mgr. of the Aircraft War Production Council for East Coast airframe manufacturers. His new post will include coordinating aircraft mfrs' information among members of the East Coast Council.

C. P. SHROPSHIRE, who for the past two years has been traffic manager of Vultee's Inland Division, has taken up new duties in Washington, where he will serve as director of traffic and transportation for the AAF, as the result of a request by Lt. Gen. Arnold.

U. S. Air Corp.

LIEUT. GEN. GEORGE C. KENNEY, holder of the D. S. C. and Silver Star, was nominated to the temporary grade of lt. gen. by Pres. Roosevelt. He served as Chief, Prod. Eng. Section, Wright Field, until 1941; was assigned command of the Allied Forces in the Southwest Pacific.

ASSEN JORDANOFF, flyer and author, has formed the Jordanoff Aviation Company, and GEORGE F. McLAUGHLIN, former editor of "Aero Digest," has been named director of production. The new organization will prepare illustrated technical aviation manuals to be used in instruction in aircraft flight and maintenance and will be furnished the government air services as well as private enterprises.

The first large Regulation V loans for the aircraft industry to reach the New York capital market have been arranged by Lockheed Aircraft Corp. and its subsidiary, Vega Aircraft Co. The Lockheed loan of $60,000,000 will be managed by Bankers Trust Co. while the $30,000,000 Vega credit will be handled by the Central Hanover Bank & Trust Co.

Preparations for a $200,000,000 loan of the same type for Bendix Aircraft Corp. are being completed and the loan will be managed by a Midwestern bank. Briefly, the V-type loan provides for a government guarantee up to 90 percent of the amounts borrowed and they are self liquidating upon completion of deliveries under war contracts.

Large banking groups, ranging from a dozen to several hundred institutions, join together to make the funds available as the amounts are so large they would be unable to handle them individually under the banking laws. Amounts that can be loaned to any one customer are strictly limited under the law. In some cases the aircraft industry has financed war contracts directly through the government without participation by the banks. The V loans, however, permit more flexible financing arrangements. Corporate receipts and disbursements, for example, need not be segregated as these new loans apply to a company's total war contracts.

United Aircraft's third quarter report provides one of the few straws on the subject of 1942 earnings of aircraft companies as nearly all other concerns come under the Army's interim report ban. United earned $10,415,920 or $3.55 a share for the first nine months, compared with $10,771,730 or $4.05 a common share in like 1941 period. However, in the 1941 period United set aside a special $4,000,000 postwar reserve. The dollar volume of shipments for the nine months was about 80 percent larger than a year ago, yet earnings showed a moderate decline due to the lower prices now obtaining in war products delivered to the United States government. Total tax reserves were slightly lower than last year due to the new revenue act provision limiting tax levies to 80% of taxable income.

United Aircraft has moved into the billion-dollar class, a distinction that was held by Curtiss-Wright alone in the aircraft group when most major companies discontinued issuing unfilled order reports after Pearl Harbor. United's backlog of orders totaled $1,232,319,534 on Sept. 30, compared with $914,191,113 on June 30, and $499,048,847 the previous year. Just short of half a billion dollars in orders was booked during the third quarter.

Stockholders of aircraft companies are getting their year's dividend payments in one sweep. Among the recent declarations are: Douglas Aircraft, $5 a common share; Bell Aircraft, $2 a share; Liberty Aircraft Products, 25c. a share; Lockheed, $2 a share, and North American Aviation, $1 a share. Bell, Douglas and Lockheed made the same payments in 1941 while North American dispersed $1.25 a share last year. Fairchild Aircraft Ltd. of Canada declared an initial dividend of 25c. a share last month, while Timm Aircraft Co. made a 5c. payment on each capital share. A similar dividend was paid last July.

Aggregate market value of aviation stocks listed on the New York Stock Exchange in October totaled $601,827,000 or an average price of $17.41 a share. Aviation stocks stood twelfth in aggregate value out of 25 leading industrial groups.

Thompson Product's investment in Thompson Aircraft Products Co., a subsidiary, amounted to $905,000 at the close of September. The subsidiary operated at a deficit of $345,000 in 1941 when production was just getting under way but is now operating profitably. Combined sales of the parent company in the first nine months were $61,753,000, of which the aircraft subsidiary accounted for $18,666,000. Earnings for the same period were $1,463,900 or $4.61 a share against $1,264,700 or $3.92 a share in the like 1941 nine months. Thompson Aircraft Products contributed $495,000 to the 1942 earnings total. Sales for the year are expected to approximate $90,000,000 compared with 1941 shipments of $42,459,000.

Continental Motors Corp. is negotiating with banks for a large line of credit to finance its expanding business, according to reports. On Oct. 31 the company completed by far the greatest sales year in its entire 40-years history.

National Aviation Corp., an investment trust, reported two changes in its investment portfolio between June 30 and Sept. 30. A total of 2,500 shares of Glenn L. Martin Co. stock were sold, bringing the holdings of that issue down to 7,400 shares. Also 1,200 shares of Pan American Airways were liquidated, leaving 12,400 shares still held.

Completing its third fiscal year on July 31, Northrop Aircraft expanded sales to $32,983,000 compared with $3,407,000 in the preceding fiscal year while operations showed a profit of $3,044,741 compared with a deficit of $848,779 in 1941. The annual report revealed that a $17,000,000 V loan was obtained in August from a group of banks headed by the Chase National Bank. Objects of the company were listed as: (1) To use profits to increase facilities to their maximum efficiency, (2) to build up working capital, and (3) to establish a sound dividend policy. The report stated that the first object had been achieved and the second is on the way but the third will depend for the duration largely upon the tax laws.

The Aviation Corp. reported net earnings of $3,671,716 or 64c. a share for the nine months ended Aug. 31, compared with $1,459,649 or 25c. a share in the like 1941 period. At the same time sales were $29,635,200 against $11,727,780 a year ago. These earnings do not include the company's share in the undistributed profits of its numerous subsidiaries, such as Vultee Aircraft and New York Shipbuilding Co.

Braniff Airways is now doing more passenger business with 7 airplanes than it did last

★ ★ ★ By RAYMOND HOADLEY ★ ★ ★

DIVIDEND PAYMENTS by aircraft companies in the first nine months of 1942 showed a decline of no less than 45 percent under the like 1941 period—a heavier decrease than that reported by any other group. Aircraft stockholders began to hold their hats in anticipation of a bumpy ride as even the converting automobile industry had curtailed dividends only 35 per cent. But in October Congress finally passed this year's revenue act and the industry was able to figure more intelligently on its probable profits for 1942. As a result, dividend payments declared late in October amounted to $9,746,753 or about one-third more than the $6,712,000 disbursements made in the entire first nine months among the 19 major aircraft concerns.

October payments, it might also be noted, were the second largest for any past month while November announcements were expected to bring the total for the year above the 1941 finals. Some companies may not pay out quite as much as last year but, on the other hand, a number of companies, such as Beech and Vultee, initiated dividends and Boeing resumed payments after a five-year lapse.

The first war tax measure is much more lenient toward business than had been expected. Hence, the improved outlook for aircraft earnings and dividends. The Administration had asked a corporate tax rate of 55 percent and a 90 percent excess profits tax. Congress approved a normal tax rate of 45 percent and the 90 percent excess profits tax. But the legislators went further. A postwar credit of 10 percent on excess profits taxes was voted and companies are allowed to take 40 percent of their debt repayments as a deduction from this tax and as an offset against the postwar credit.

From the standpoint of aircraft companies the best thing about the new law is the 80 percent tax ceiling. Most aircraft companies will have extremely high excess profits in relation to either capital or past earnings. Jumping, as they have, from relatively small peacetime operations to the nation's largest war industry, such a tax ceiling was vitally needed to enable them to finance their working capital needs and still pay out something to patient stockholders. Without this tax limit some companies would have had to pay more than 90c. out of every earnings dollar to the tax collector.

Another helpful provision in the act is designed to aid companies that happened to have an abnormally poor year during the 1936-1939 base period for the average earnings exemption for excess profits. Now a company is allowed to substitute 75 percent of the average of the other three better years in figuring its exemption. Several aircraft companies probably will take advantage of this choice.

★ ★ ★ ★ ★

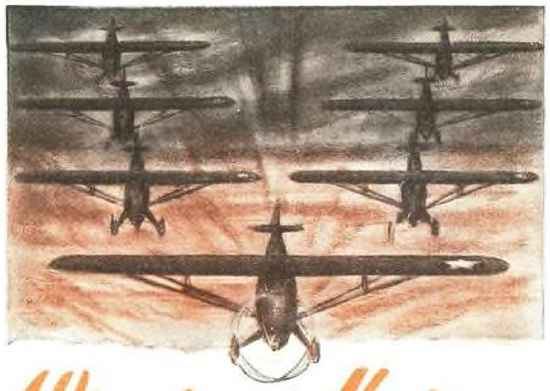

Winging to Victory!

WITH "40-E" SCOTT-CAST ALUMINUM-ALLOY CASTINGS

From "grasshoppers" to multi-engined bombers, Scott 40-E castings are playing a prominent role in the production of "Wings for Victory." Selected by Scott engineers for use in Scott accessories requiring exacting physical properties, Scott 40-E castings are now answering many engineering and design problems in general aircraft construction.

40-E castings are exceptionally high in ultimate strength, yield strength and pressure-tightness. Not heat treated, these castings attain ultimate strength in 21 days by room-temperature ageing; and, if urgently needed, can be machined five days after casting. Ageing normally takes place during assembly or fabrication.

Due to high yield strength, Scott 40-E castings readily replace most standard heat-treated alloys. They are easily welded and can be furnace-brazed to aluminum brazing sheet. Periodic checking by x-ray assures uniform quality of grain structure.

Production of 40-E is now approaching maximum capacity—yet Scott facilities still permit the meeting of a few additional demands. And, in accordance with Scott policy, *all orders accepted will be delivered on schedule.*

CONSERVATIVE PHYSICAL CHARACTERISTICS OF "40-E"

TENSILE		YIELD STRENGTH		ELONGATION	
TYPICAL	MINIMUM	TYPICAL	MINIMUM	TYPICAL	MINIMUM
33,000	29,000	24,000	20,000	6%	4.5%

(In pounds per square inch)

SPECIFICATIONS

U. S. Navy 46-A1-Class 1 — U. S. Army Air Force 11-324
A. S. T. M. — B-26-37-T.

Scott AVIATION CORPORATION
LANCASTER, N. Y. U. S. A.
DESIGNERS AND MANUFACTURERS OF SPECIAL EQUIPMENT FOR THE AIRCRAFT INDUSTRY

SUPPLIERS TO THE U. S. ARMY AND NAVY AIR FORCES AND LEADING AIRCRAFT MANUFACTURERS

year with 16 planes. At last report income from passenger traffic also is running slightly in excess of last year.

Airlines generally are reporting decreases in passenger traffic on their regular runs due to the transfer of equipment for military operations. At the same time air mail volume is at new record peaks and express is running from 150 to nearly 200 percent ahead of last year in several cases.

In two instances domestic airlines are reported to be operating at least one and sometimes more of their regular daily schedules as straight cargo carriers.

ON THE RAW MATERIALS FRONT

NO LONGER will millions of American boys be able to secure balsa wood for their model airplanes. In fact, the aircraft industry itself is finding difficulty in obtaining this wood as a substitute for light metals in plane production. Donald Nelson has decreed that for the time being all new supplies of this amazingly light wood must be sent to Great Britain to aid there in giving the Allies mastery of the air over the Channel. The British are reported using large amounts of this special wood in their new de Havilland *Mosquito* bomber.

From the West Indies to Bolivia, and especially in Equador, battalions of lumberjacks, directed by United States lumber experts, hack through the tangled forests on the Equator for this vital material. No wonder balsa is in such great demand by the United States, Great Britain, Australia and Canada. It is only one-half as heavy as cork and is stronger than spruce. Furthermore it grows fast, shooting up 50 ft. in five years, and then is ready to be cut. The United States does all the buying for the United Nations and every effort is being made to step up the supply. The recent shipment of a huge drying kiln to Equador, for example, is expected to add 2,000,000 b.ft. to the 1943 supply.

But balsa is not the only wood in limited supply. Lumber generally is becoming as scarce as some of the metals. Production is going down and requirements are going up. War production officials estimate that consumption needs for 1942 at 38,000,000,000 b.ft., made up of 32,000,000,000 b.ft. of softwoods and 6,000,000,000 of hardwoods. In 1943 the situation will change but little, with some needs dropping but other military requirements increasing.

Against these estimated consumption figures we had a production in 1941 of 30,000,000,000 ft. of softwoods and 6,000,000,000 ft. of hardwoods. Output this year is estimated at anywhere from 10 percent to 85 percent under 1941. As a result, WPB officials say that even if the current downward trend in lumber production is halted, we still will be short some 5,000,000,000 ft. in softwoods and 750,000,000 ft. in hardwoods in 1943.

The volume of dimensional lumber of fine quality needed for the aircraft construction programs of the United States and the lend-lease governments at the present time and for the next year exceed the present production rate by about two times, according to Arthur Upson, lumber chief in the WPB. In other words, the optimum program of the United Nations calls for twice as much Sitka Spruce, Noble Fir, West Coast Hemlock, Douglas Fir and Yellow Poplar as can be produced under present conditions.

The hardwood veneer and plywood situation is not now serious but it might become so almost over night. The Higgins and Kaiser cargo plane programs, for instance, will eventually call for huge quantities of plywood. Right now the capacity of the hardwood plywood industry, with its present equipment, is estimated at 180,000,000 sq.ft. a year on a 3/32 in. basis. The industry has a large amount of special machinery on order, all of which should be received by next April. That would increase its capacity to 300,000,000 sq.ft. annually. Not all the present plywood plant capacity is currently being used for plane parts and other war implements, so the bottlenecks that may appear here are more apt to be labor and the difficulty of getting good quality timber for the necessary veneer rather than plant capacity. There is a shortage in tough ash used for plane parts and handles.

The substitution of wood for metals now exceeds 6,000,000,000 b.ft. and has saved 2,500,000 tons of aluminum, steel and copper besides 200,000 tons of rubber. The aircraft programs of the United States and the United Kingdom will require huge amounts of birch, yellow poplar and red gum veneer for plywoods and certain softwoods. Just how much is, of course, a military secret. But it will be sufficient to necessitate the allocation of high quality logs in these three species solely for aircraft manufacture.

The giant Commando gliders—newest "cogs" in our air forces' Victory machine—are effectively equipped with Scott Tail Wheel Assemblies to facilitate easier ground-handling—more ground maneuverability.

Developed by Scott specifically for glider installation, these special assemblies are patterned after the standard Scott Full Swivel design. Exceptionally light in weight, rugged and shock-resistant, these glider units are marked by an unusual production advantage: *no strategic war material is employed in their construction.* Even the tires are a special molded, composition in place of rubber!

SCOTT *Full-Swivel* TAIL WHEEL ASSEMBLIES

And as another contribution to Victory joins the growing Scott family of air craft accessories and special equipment which now includes Oxygen Manifolds...Oxygen Regulators...Brake Pressure Units...Control Wheels ...Stabilizer Yokes...Rudder Horns...Aileron Bell Cranks and 40-E *Scott-Cast* Aluminum Alloy Castings.

Your inquiry on special equipment problems answered promptly and in strict confidence.

Scott Aviation flies the Army-Navy "E" Flag for production achievement.

Scott AVIATION CORPORATION
LANCASTER, N. Y. U. S. A.
DESIGNERS AND MANUFACTURERS OF SPECIAL EQUIPMENT FOR THE AIRCRAFT INDUSTRY

SUPPLIERS TO THE U. S. ARMY AND NAVY AIR FORCES AND LEADING AIRCRAFT MANUFACTURERS

Useful data on

PLEXIGLAS

OPTICAL PROPERTIES

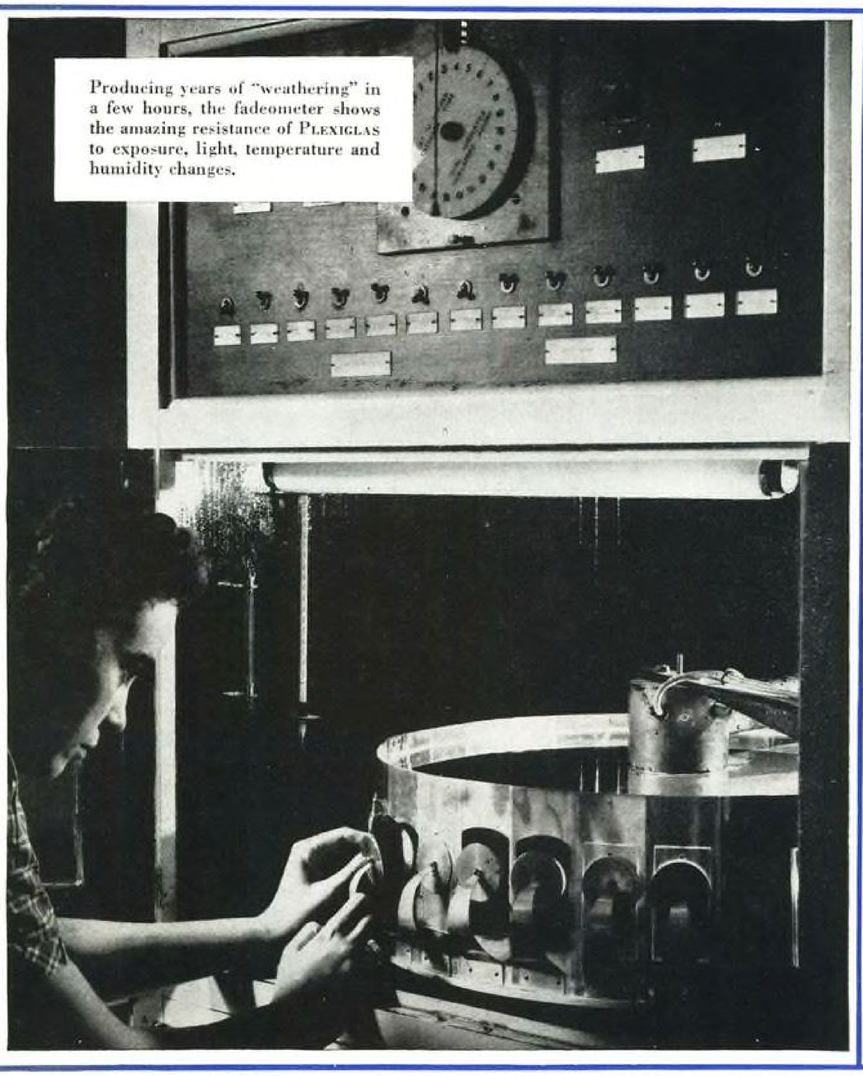

Producing years of "weathering" in a few hours, the fadeometer shows the amazing resistance of PLEXIGLAS to exposure, light, temperature and humidity changes.

EXCEPTIONAL resistance to accelerated aging is just one of the many valuable properties of PLEXIGLAS described in a technical booklet published recently by Rohm & Haas. This booklet, entitled *PLEXIGLAS Optical Properties*, also contains complete data on PLEXIGLAS index of refraction, dispersion, transmission, X-ray transmission and optical density. Engineers, designers, and physicists will appreciate particularly the unusually large number of photographs, diagrams and charts contained in *PLEXIGLAS Optical Properties*. Write for your copy of this valuable reference booklet.

THE CRYSTAL-CLEAR ACRYLIC PLASTICS

PLEXIGLAS

SHEETS AND RODS

★

CRYSTALITE

MOLDING POWDER

PLEXIGLAS is the trademark, Reg. U.S. Pat. Off., for the acrylic resin thermoplastic sheets manufactured by Rohm & Haas Company

ROHM & HAAS COMPANY

WASHINGTON SQUARE, PHILADELPHIA, PA.

Manufacturers of Leather and Textile Specialties and Finishes.. Enzymes.. Crystal-Clear Acrylic Plastics.. Synthetic Insecticides.. Fungicides.. and other Industrial Chemicals

Recent Books

QUEEN OF THE FLAT-TOPS, *by Stanley Johnston. Published by E. P. Dutton & Company, New York. Illustrated, 280 pages, $3.00.*

A vivid, first-person account of the last cruise of the aircraft carrier *Lexington* rewritten from his newspaper dispatches by the only reporter aboard.

His story is occasionally padded with interesting trivia such as the ceremony on crossing the Equator, how the Navy bakes bread, and adventures of pilots downed on Pacific islands, but the reconstructions of major actions are succinctly dramatic, devoid of weepy heroics.

During her last three months afloat, planes from the Lady (as her crew often called her) wiped out a Jap fleet at Tulagi and assisted in knocking down scores of planes and sinking two carriers. Then the Japs found her. In 16 min. 103 planes assaulted her with bullets and five torpedoes which started fatal fires.

With brief anecdotes Johnston recreates the nonchalance of the officers and crew during the last few hours. About 5 o'clock on June 8—six hours after the first torpedo hit—Adm. Fitch gave this simple abandon order to Capt. Sherman: "Well, Ted, let's get the men off." Sherman believes that all aboard were saved. Most of the men went overside casually. One mechanic even waited to report to Comdr. Hamilton that a new wobble pump had been installed in his plane. "Took you a long time," Hamilton jested.

"Yes, sir. I had to draw one from the store and had an awful time to get to it. There's a terrible big fire down there."

To Johnston "in the deepening twilight it was a sight of awful majesty, one that wrung the hearts of all who watched."

PLASTICS FOR INDUSTRIAL USE, *by John Sasso. Published by McGraw-Hill Book Company, New York. 229 pages, illustrations, appendix, and index, $2.50.*

A guide and idea stimulus for new uses of plasties by a frequent contributor to AVIATION. Following a general discussion of designing, molding and machining, Mr. Sasso devotes separate chapters to the properties, adaptability, and uses of various plastics, among them phenolic, urea, aerylic, vinyl, and ethyl cellulose.

The book also contains a chart on common faults, causes, and remedies in molded plastic parts, a directory of trade names, suppliers, and molders—and a warning to the engineer to consult the manufacturer for complete details before adopting a plastic.

PHYSICAL SCIENCE IN THE AIR AGE (A TEACHER'S GUIDE), *by J. G. Manzer, M. M. Peake, and J. M. Leps. A volume in the Air-Age Education Series. Published by the MacMillan Company, New York. Bibliography, index, illustrations.*

A kind of aviation geography to familiarize high school teachers with the essentials of flight so that they in turn can intelligently show their students how the prineiples of classroom physies and general science underlie plane construction, engines, and navigation.

Material is elementary and presented in simple sentences and diagrams, followed by lists of suggested supplementary reading and motion pictures.

PRINCIPLES OF FLIGHT *by Bert A. Shields. Published by the McGraw-Hill Book Company, New York. 363 pages, illustrated, indexed, $1.88.*

PRINCIPLES OF AIRCRAFT ENGINES, *by the same author and publishers. 378 pages, illustrated, indexed, $1.88.*

For "secondary school students who yesterday built model planes and tomorrow will pilot planes only now being designed" Lt. Comdr. Shields presents the first two books of his projected four-volume *Introductory Aviation Series*. Briefly, lucidly he outlines what every aspiring pilot must know.

The lesson begins in *Principles of Flight* with a condensed history of aviation and is followed by simple explanations of the anatomy of the airplane, forces in flight, and stability and control. Then the student goes aloft for a few printed lessons in operating a plane himself, aerobatics, and safety.

After this introduction to the art of flying, the cub pilot learns about the chief mechanism that makes it possible. *Principles of Aircraft Engines* offers him detailed descriptions of various instruments and engine parts, operation, and maintenance.

Summaries, questions, and study assignments follow each chapter in both books.

AIRCRAFT BLUEPRINTS AND HOW TO READ THEM, *by Carl Norcross. Published by the McGraw-Hill Book Company, Inc., New York. 102 pages, illustrations, appendix, index, $1.75.*

A short intensive text on blueprint reading for aircraft construction and maintenance mechanics by the former managing editor of AVIATION now on duty with the Army Air Forces.

Blueprint sizes, lines, title blocks, numbering systems, symbols, abbreviations, terminology, and dimensions are carefully explained by detailed references to accompanying detail, assembly, and installation prints. Review questions follow the analysis of each print. There is also a chapter on standard parts with reproductions and explanations of Army-Navy specifications and an appendix containing decimal equivalents, drill sizes, nomenclature, and symbols for electrical installations.

The material covers recommended learning for new employees.

METEOROLOGY FOR SHIP AND AIRCRAFT OPERATION, *by Peter E. Kraght. Published by Cornell Maritime Press, New York. 373 pages, illustrations, index, $3.*

A detailed text on vertical and horizontal winds, accompanying weather, and their affect on operations written in dilute technical language for pilots (and mariners).

Also included are sections on facts about the air, fog and other low clouds, glossaries of winds and technical terms, charts, photographs of various types of clouds, and 154 weather diagrams by the author who is senior meteorologist for American Airlines.

FIGHTER FACTS AND FALLACIES, *by John G. Lee. Published by William Morrow & Company, New York. 64 pages, illustrations, $1.25.*

An exceptionally lucid, nontechnical discussion of the effect of design on fighter plane performance. While man's fate hangs on his mechanical wings the subject is of more than academic importance, for, as the author remarks casually, "A second-best fighter, like a second-best poker hand, is a very bad bet."

In short chapter subdivisions he analyzes the performances of various wing and power loadings, weight increases, streamlining, span loading, and propellers. Explanations are concise. Examples: "If two fighters are identical except for power, the more powerful will be the faster. This is true at all altitudes and under all conditions."

"The supercharger is essentially an air compressor."

"Increased propeller efficiency is power without weight. This means improved takeoff, improved climb, improved ceiling, improved range, and improved speed."

Diagrams show each of these major points and a brief table, with accompanying illustrations, sums up interrelated performance factors.

(*Turn to page* 298)

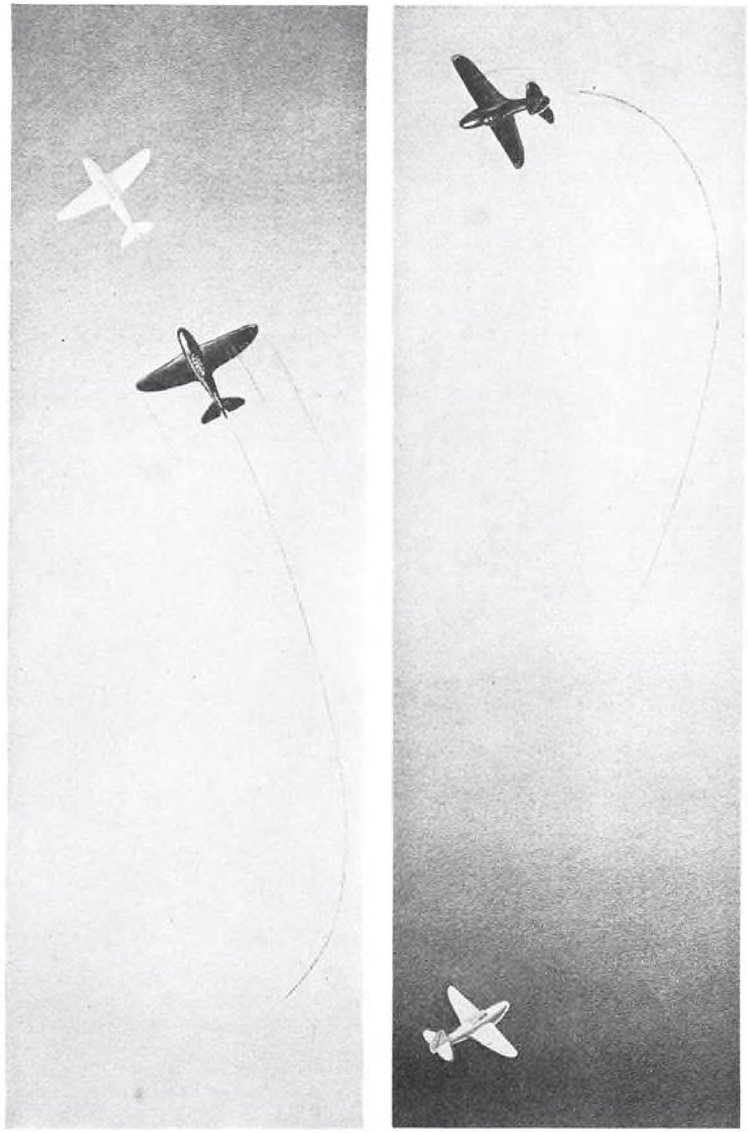

Illustrations like these are interspersed throughout the text of John G. Lee's Fighter Facts and Fallacies, demonstrating graphically the fundamentals of fighter design and performance. Cuts above show how with superior altitude performance, the lightly loaded plane can dive upon its more heavily loaded adversary.





Left: A propeller big enough to hold 2000 hp. at 40,000 ft. will hold 8000 hp. at sea level. Right: The bigger the "prop", the slower it must turn.

"There is no 'best' fighter airplane," says Mr. Lee, the assistant director of research for United Aircraft Corporation. "With no opposition, almost any 'crate' will win the war. . . However, if the competition is close and the opponent well organized, then the specialist will win."

His book is an index and summary of laboratories of detailed facts, a catalyst to stimulate the specialist's knowledge in meeting the competition.

PRIVATE PILOT'S HANDBOOK, *by A. G. Norwood. Published by Pitman Publishing Corporation, New York. 258 pages, illustrations, appendix, index, $2.50.*

A former educational specialist for the CAA offers students preparing for private pilot examinations some compressed, pointed information on flight theory, meteorology, navigation, radio, flight regulations and tests, and a list of typical examination questions.

Recommended prescription for those pre-examination jitters.

INTERNAL COMBUSTION ENGINES, *by J. A. Polson. Second edition published by John Wiley & Sons, Inc., New York. 548 pages, illustrations, tables, diagrams, appendix, $5.*

A comprehensive text on all types of internal combustion engines with several chapters on diesel and aircraft powerplants.

"This book," says Prof. Polson, "is intended for junior or senior mechanical engineering students who have had a thorough course in fundamental thermodynamics and have a fair conception of the operation of internal combustion engines."

AIRCRAFT ELECTRICITY, *by Norman J. Clark and Howard E. Corbitt. Revised edition published by The Ronald Press Company, New York. 350 pages, illustrated, $3.50.*

A text on aircraft electrical systems for apprentice and experienced electricians, designers, parts manufacturers, and engineers.

Contains performance charts, diagrams, and standards for motors and lighting equipment, illustrations of circuits, wiring systems, conduit layouts, bonding and shielding, and chapters on design, compass deflection, and inspection and protection of wiring and equipment.

A Correction

In the October issue of AVIATION the review of *Practical Aircraft Sheet-Metal Work* inadvertently stated the book was published by John Wiley & Sons, Inc. This was in error, as the book was published by the McGraw Hill Publishing Co., Inc., 330 W. 42nd St., New York.

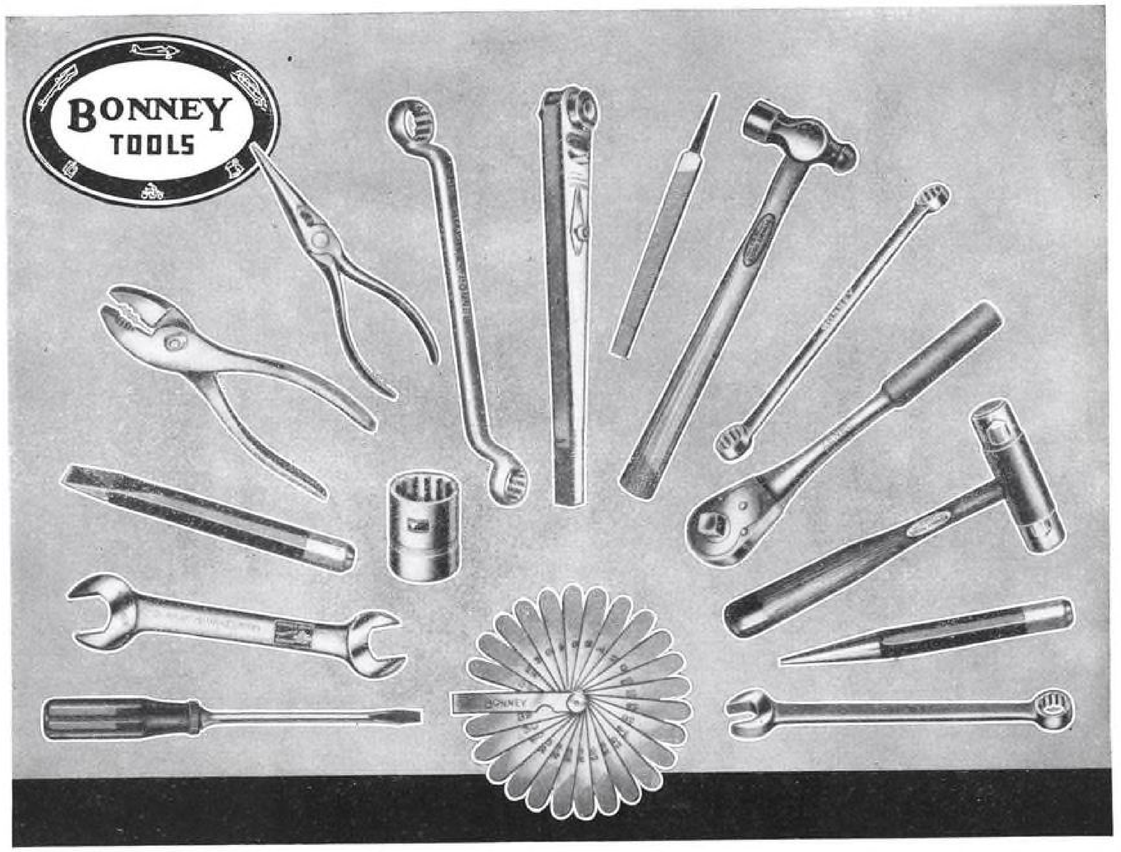

For Production...Maintenance...Service

NO where—except in the the Bonney Line—will you find such a complete assortment of quality hand tools for aviation production, maintenance and service.

Considered standard by leading aviation motor manufacturers (where only quality is taken into consideration) for factory supplied tool equipment, they are also used extensively by all branches of the United States armed forces.

Awarded to the Men and Women of Bonney Forge & Tool Works "for great accomplishment in the production of war equipment".

139 types—1169 sizes to meet practically every hand tool need. You, too, can profit handsomely by using Bonney Tools to meet your production, maintenance and service requirements—the same tools that mechanics in every line of industry proclaim to be "The Finest that Money Can Buy".

•

Write for big 104 page catalog showing the full line. Stocked by leading jobbers everywhere. Bonney Forge & Tool Works, Allentown, Pa.

BONNEY

The Finest that Money Can Buy

The Lombard 2 in 1 MILLER

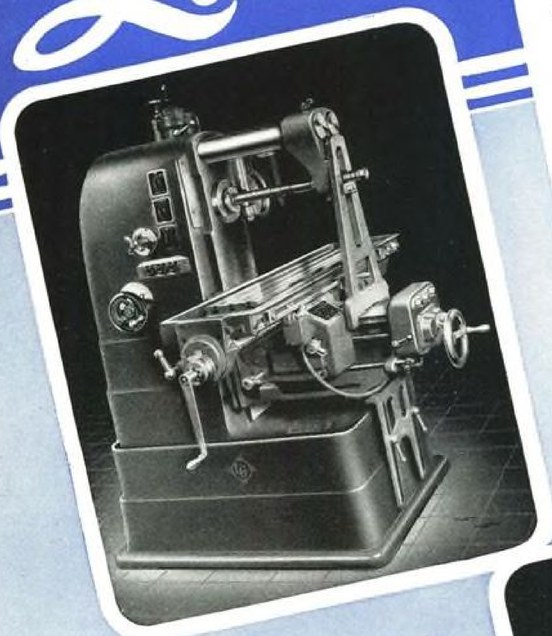

THE LOMBARD 2 in 1 MILLER
UNIVERSAL TYPE MILLER
For Either
HORIZONTAL OR VERTICAL WORK
Salient Features

CONSTRUCTED FOR PRODUCTION
Table is equipped with six direction power rapid traverse, longitudinal table travel has table dog controlled automatic cycle. These advantages, coupled with its large dimensional capacity and extreme ruggedness, makes it the ideal production machine.

UNIVERSAL SAFETY FEATURE
Safety interlock insures against injury by table cranks. Safety torque slip clutches prevent overloading on all power rapid traverse and power feed travels.

CONSTRUCTED FOR PRODUCTION
Column, base, knee and saddle of heavy section block construction. All castings heat treated to overcome casting and machining stress

FOR HORIZONTAL WORK
Three bearing mounting of the large double overarms overcomes torsion and stress in the arbor support. Overarm brace ties arbor support to the knee, which is tied to the base, giving the cutting arbor more than usual rigidity, and does faster and finer work.

FOR VERTICAL WORK
Rugged head structure, hinge mounted, transforms horizontal into swivel head vertical machine. Vertical quill is hardened and fitted in a ground bore with pick-up screw and point. Spur drive and spindle gives high torque and high speed belts transmit full spindle horse power.

The Lombard 30 HV Milling Machine is sold both as a single purpose machine (horizontal or vertical) or as the Universal Machine.,

Write for folder and prices.

LOMBARD GOVERNOR CORPORATION
ASHLAND, MASSACHUSETTS, U. S. A.

White Floors

(*Continued from page* 167)

be built or converted to aireraft production alone. And that's not counting the large hangar-floor potential which offers wide new "underside and vertical surface" vistas. Broad additional possibilities merely await the opening of "postwar doors."

Besides the values of good illumination already emphasized, these further pertinent points are listed by *Factory Management and Maintenance* (March, 1942): "Good lighting increases the effective hours spent on the job, decreases absenteeism directly or indirectly caused by eye fatigue. . . increases effectiveness of supervision because foremen can see more of their operators and more machines, can supervise more workmen. . . increases effectiveness of new workers on new jobs . . . minimizes sabotage and espionage."

"Before and after" studies have shown scrap pieces in machine shops reduced 25 percent. . . time to make fittings and adjustments reduced 15 percent. . . accidents reduced up to 25 percent. . . and production increased up to 25 percent. Decreases in errors by as much as 50 percent are indicated by a British survey in war plants.

Re Consolidated's comparative study of the white flooring *versus* the gray, *Engineering News-Record* for June 25, 1942, reported:

"When new, the white cement floor reflected 44 percent of the 36.5 foot-candles falling upon it, or 16 foot-candles. After six months use, an 18 percent loss in foot-candles is noted, bringing the reflected light down to 13 foot-candles. For the gray cement floor, the initial reflection was 27.4 percent of 36.5 foot-candles, or 10 foot-candles. After six months service, a loss of 22 percent was noted, bringing the reflected light down to about 8 foot-candles."

In short, the white flooring is credited with an 18-13 foot-candle score over the gray's 10-8 performance.

The Consolidated plant in question is lighted with two-lamp RF-type fluorescent units spaced 8 ft. 4 in. along the truss and 12 ft. 6 in. lengthwise (twin units on 25-ft. centers). Having obtained, with the white flooring, an even distribution of light below, as well as above, wings of planes, cumbersome flood light equipment is needed only for fuselage interiors.

There are 6,720 two-tube fixtures in the white cement area. However, it was determined that had this floor been of gray concrete, like the adjoining floor, 20 percent more fixtures (at $33 net) would be required to give the same level of illumination. That bill would be $44,352. Then maintenance of the additional fixtures (two tubes each, three times per year) was put at an extra $14,515, while the extra electricity would come to $12,067. Total: $70,934.

Accordingly, since the extra cost of the white floor in this plant was approximately $40,000, a saving of $30,934 is recorded the first year on fixtures, maintenance, and power. And each year thereafter, the white cement yields a return of $14,515 in lamp maintenance plus $12,067 in power, or more than $26,000.

Of course, costs in another plant would be higher or lower depending on the specific conditions encountered. Also, costs of white cement floorings vary in different localities.

The figures on potential air conditioning saving necessarily are but a broad approximation based on the saving of about one ton of air conditioning each time the lighting load is reduced 3½ kw. Additional energy converted into light and consequently heat by a 20 percent increase in lighting fixtures necessary for a gray floor gave an extra air conditioning cost, on a kilowatt calculation, of $19,750. To this figure, in the saving column, could be

NO JOB TOO TOUGH-

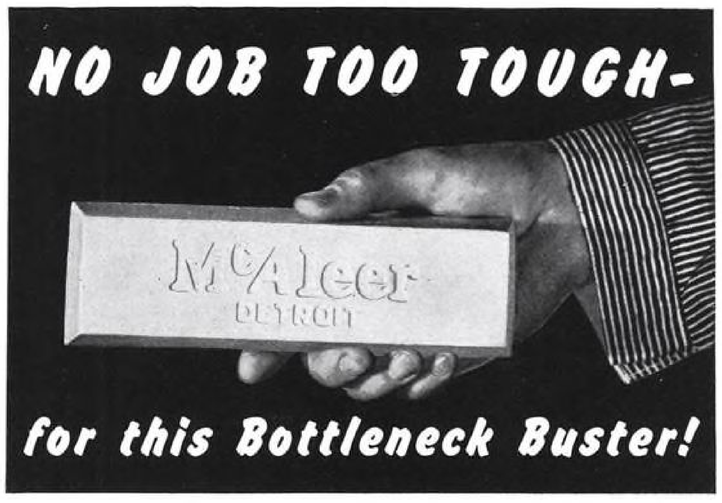

for this Bottleneck Buster!

● To win our share of this war we've got to tighten up—toughen up. We've got to funnel the work of three hours into one. Today production finishing requirements become more and more critical. The demand for speed and more speed becomes more insistent. That's why it is imperative to leave no stone unturned to find the finishing materials and methods that will push your production up to the peak you have to hit and keep it there.

It will pay you to learn why McAleer metal finishing materials and methods are performing such outstanding service for the leaders in your industry today—and, more important, how similar materials and methods can solve your metal finishing problems.

McAleer will work with you—recommend "tailored-to-fit-the-job" materials and methods—and then follow through as needed. The value of this service is already written in the finishing production records of many manufacturers who are working today under greater pressure than ever before. McAleer's Finishing Engineers and laboratory staff have helped them bust some pretty tough production bottlenecks . . . and usually with a plus of increased production, better finish and lower operating costs. It's the kind of a job we want to do for you.

McALEER
McALEER MANUFACTURING CO. • ROCHESTER, MICHIGAN

Castolin Eutectic

LOW TEMPERATURE WELDING

IMPROVED METHOD FOR WELDING CAST IRON

36-Page Book Free!

WAR plants the country over rely on Castolin Eutectic Alloy #14* (for gas welding) and Castolin Eutectic Alloy #24B* (AC-DC metallic arc) for easy, reliable welding and reclaiming of broken, cracked, worn, or defective castings. These new low temperature welding alloys give a completely machinable, color matching weld — free from stresses and distortion.

Use Castolin Eutectic Low Temperature welding alloys #14* and #24B* in place of "hard-to-get" bronze welding rods. Castolin Eutectic Alloys #14* and #24B* contain no scarce metals . . . . available with priority A9.

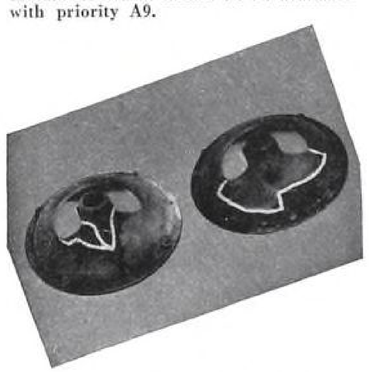

Cast Iron covers salvaged with Castolin Eutectic Low Temperature Alloys.

CHECK THESE ADVANTAGES:

- *High strength*
- *Matching color*
- *Less stresses*
- *Less warping*
- *Less preheating*
- *Greater economy*

*Patented

Some territories available for Manufacturer's Representatives

EUTECTIC WELDING ALLOYS CO.

40 Worth St. New York, N. Y.

added an estimated $3,500 in operating charges for electricity, or a total saving of $23,250.

Approximate though these figures are, it is evident that the white cement floor is a factor to be considered when designing and estimating the cost of an air conditioning system.

An addition to a plant's lighting load is often a problem as well as a considerable expense in itself. Savings here, through the use of white flooring, are indicated. Needless to say, added electrical equipment for lighting and air conditioning would call for quantities of currently critical materials. Priorities are also to be considered.

But white or light-colored sand and stone and white cement are readily available.

Finally, it may be emphasized that the "floor is the factory." There are few places in a plant where it does not pay big dividends to have an adequate, substantial, and durable floor. "Saving" on floor construction is poor economy, since an unsatisfactory floor slows down production.

It is, of course, the top surface of a concrete flooring which takes the wear and grind, and for that reason careful placing and curing of good concrete is essential. The properly laid concrete floor will resist extremely severe conditions indefinitely, and it will not suffer from that most troublesome floor disease known as "dusting."

With white concrete, color is highly important. Stains not only are unsightly, but they may decrease the reflecting values. So it is that practices and materials which may be satisfactory for a gray floor may not be satisfactory for a white one. In placing, finishing, protection, curing, and maintenance, the use of machines, tools, trowels, materials, or practices which may stain or soil the flooring should be avoided.

Altschul

(*Continued from page* 249)

Utilities May Point Pattern

This reduction in rates was accomplished either by voluntary action or by regulatory moves; frequently it was a combination of the two. On the one hand, constant technological progress made it possible for the power companies to reduce their rates so as to broaden their markets. In many instances, however, the regulatory bodies determined that the utilities were earning "excessive" profits and realizing too large a return on invested capital and forthwith took action to force the rate structure down.

A careful perusal will disclose that these same elements are present, in large measure, in the case of the airlines.

It is inevitable that great technological strides will be experienced by commercial aviation after the war. This should permit substantial operating economies and thus make possible rate reductions for the carriage of passengers, mail and express. This, in turn, will materially enlarge air transportation's market.

Should the airlines be slow to effect voluntary rate reductions when they are in a position to do so, it is only necessary to look at the regulatory processes for the possible course of events. The Civil Aeronautics Board has indicated its intention of reducing mail compensation so as to limit airline earnings to a return of about 10 percent on invested capital. This principle was definitely indicated in the Pan American-Grace Airways decision and, to a lesser extent, in the American Airlines case. The board was clear in indicating that this policy, i.e., a limited return on capital, was being followed only as a war expedient and that "a return to normal incentives to attain the best possible commercial service" would be made upon the conclusion of the war, or perhaps earlier. It must be apparent that the application of this policy places a virtual ceiling on airline earnings. What a 10 percent return on capital can mean for the major lines is indicated in Table I. Regardless of what subsequent action is taken by the board, the regulatory existence is strong and clear and federal supervision will remain with the industry as long as it is vested with such a substantial public interest.

Should further evidence be desired that airline rates will eventually trend downward, voluntary or otherwise, it is only necessary to look at another transportation medium—the railroads. According to Chairman Splawn of the Interstate Commerce Commission, the decline in railway rates since 1929 was largely the result of voluntary reductions brought about by competition of other agencies of transportation, and that competition prevented the restoration of the higher rates. (This statement was made in 1939, prior to the adjustments caused by war conditions.)

Competition Assured

The airlines themselves will be in a highly competitive field and have no assurance of having the transportation market under their dominance.

True, luxurious air transport equipment of the immediate future promises to have twice the capacity and about one-half the operating cost of existing planes. This factor should permit a reduction in the present passenger tar-

(*Turn to page* 305)

Ryan Manifolds *Fight* on every front

The specially built exhaust systems of the Douglas A-20 Havoc and Boston attack bombers are one of the vital factors in their combat effectiveness and high performance. In every air battle the A-20s have shown superior striking power and ruggedness under fire. Contributing to the deadly efficiency of these remarkable planes, Ryan builds the exhaust systems that control the gas and heat of their mighty engines. Similar Ryan manifold systems are standard equipment on scores of other United Nations combat and cargo planes now fighting on every front.

Exhaust Systems Manufacturing Division

RYAN AERONAUTICAL COMPANY, SAN DIEGO, CALIF.

Member, Aircraft War Production Council, Inc.

The Ryan Exhaust Systems Manufacturing Division specializes in heat transfer problems. Ryan assembly lines are models of flow production.

RELY ON Ryan

A NAME OF MILITARY SIGNIFICANCE

1922 A Leader in Air Progress for Twenty Years 1942

TO PREVENT ALUMINUM THREAD STRIPPING . . .

SIMPLE AS ABC!



A Drill out old thread with drill having limits within plus .000 and minus .005 of diameter of Aero-Thread stud to be used. Depth of hole should be at least twice diameter of stud plus 1/8".

B Clean out and tap with Aero-Thread VAT Tap of proper size. Make sure that full depth of hole is tapped and that center line of tap is at right angles to face of boss when tapping.



C Place correct size insert over shank of inserting tool, with tang in slot of tool. Screw insert into tapped hole in clockwise direction. When insert is in position, shear off tang by reversing rotation of inserting tool about a half turn.

Replace with Aero-Thread* INSERTS

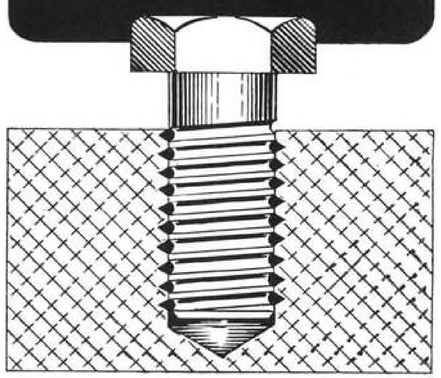

Aero-Thread Cap Screw in position in aluminum alloy boss. Note that thread profile of the screw has a circular valley and the tapped hole a modified 60° Vee thread form. *Trade Mark Reg. U. S. Pat. Off.

THE Aero-Thread Screw Thread System provides a thread lining for the tapped hole which also engages the threads of the mating screws. These inserts are made of hard, smooth, precision-shaped wire in stainless steel or phosphor bronze materials. Protection of tapped threads in light metals such as aluminum or magnesium, against wear and abrasion, is obtained at low cost with Aero-Thread Inserts. Holding power in light alloys and plastics is substantially increased and stripped threads eliminated.

Aero-Thread Screws and Studs, with their circular section thread form engaging the insert, have 100% greater fatigue resistance and 25% greater static strength than similar parts conventionally threaded.

The Aero-Thread System is standard for replacement on combat aircraft engines, thus eliminating the oversize stud nuisance. It greatly simplifies field servicing. Expensive engine casings have been salvaged with the Aero-Thread System after they had been rejected for stripped threads. It is also used in original installations in aircraft engines, carburetors, oil filters, magnetos and other products. Send for Bulletins T-1A, No. 234 and Catalog No. 5.

U. S. Patent Nos. 2,150,875; 2,150,876; 2,152,681; 2,210,061; 2,244,824; 2,262,450, 2,257,089. British, Canadian and other foreign patents issued and pending.

AERO-THREAD

AIRCRAFT SCREW PRODUCTS COMPANY, INC.

47-23 35th STREET • LONG ISLAND CITY, N. Y.

(*Continued from page* 302)

iffs of about 5c. a mile thereby broadening aviation's potential market. Present railroad passenger fares call for an average of 3.3c. per mile in Pullmans and 2.2c. a mile in coaches.

But while the airlines are progressing, will the railroads be standing still? Most likely not. Cheap and abundant supplies of aluminum and magnesium can produce strong, lightweight railroad passenger car equipment just as well as sturdier and lighter air transports. Further, short cuts in production techniques will not be confined to airplane manufacturers. It is not beyond the realm of probability that air conditioned luxury coaches with every conceivable convenience will provide low cost, rapid transportation and yet return a profit to the steam carriers.

Not to be overlooked is the progressive management influence that has already proved itself in railroad affairs. The trend which produced the streamliner, tourist trains with new comforts and coach cars better than the old-style parlors, will most likely continue and produce a few more innovations. The present war prosperity is constantly strengthening the railroad industry's condition—both financially and physically. These substantial cash resources and the excellent property condition now prevailing may stimulate the railroads to venture forth with new and bold ideas to not only retain their passenger business but to attract additional patronage as well. All these factors may conspire to make the passenger transportation field far more competitive for the airlines than is now popularly supposed. In equal measure, similiar conditions may apply in future air express and cargo operations.

Greater Coordination

It is difficult to overlook the fact that the country's railroad plant represents an investment of about $32,000,000,000. By contrast, the domestic air transport group last reported total resources of about $70,000,000. While discounted to a material extent, railroad investments still bulk large in the portfolios of insurance companies and banks, and the cry may go out to protect the interests of the "widows and orphans."

Further, the political pressure of about 1,300,000 railroad employees and their families receiving an annual payroll of more than $2,300,000,000 is more potent than the working forces of the airlines, which at last count aggregated about 25,000. Moreover, the railway brotherhoods have demonstrated their ability to secure and protect special benefits for their membership.

The future pattern of air transportation may also be conditioned considerably by broad, national objectives. It is possible a greater degree of coordination may be sought between the airlines and the railroads along with other forms of transportation. Coordination of all types of transportation has long been sought by government authorities and may achieve a greater degree of success than heretofore under the guise of postwar planning. (Since this was first written, the National Resources Planning Board advisory committee has proposed the creation of a National Transportation Agency to coordinate development of all transportation facilities—railroad, air, highway and water—after the war.)

The air transportation industry will undoubtedly experience a material expansion in volume operations once the war is over. The growth trend will probably remain upward for some time to come. It is important to note, however, that the airlines will not be without their problems and will have need of all the ingenuity which made possible their growth as a medium of first-rank importance in the country's economy.

Cargo Markets

(*Continued from page* 246)

ture can be set up, *but* it is of extreme importance that this structure be sufficiently high to permit the introduction of "specific commodity" rates lower than the base, for it is by this means that the airlines will ultimately develop their own tariff structure. The "specific commodity" rate must at all times cover costs of operation, although not all overhead or profit, and it will help fill planes, raising percent of payload, bringing out new business which will prove more and more profitable as costs go down. The shipper has been well educated in commodity rates by all ground transportation companies and will not be backward in submitting his ideas if he sees a possibility of a rate which will enable him to move his goods by air.

Commodity Analysis

Another important phase of the problem might be called a "commodity analysis." The airlines need not be content with merely attempting to get a large portion of the express business because there are several factors in air transport which will enable them to carry goods now moving LCL and, in some cases, to create new markets.

Commodities of high intrinsic value are particularly adaptable to air transportation since the poundage charge is of less importance in relation to the value of the goods. It has been amply

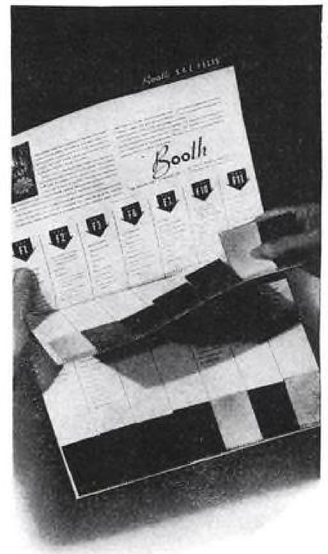

Working Tools

● Designers, production and purchasing men make good use of Booth's combination felt application chart and sample file. Contains actual swatches of all S.A.E. felt types . . . felts which (when precision die-cut into Booth mechanical felt parts) serve exacting aircraft and other key industries.

Complete specification tables are included . . . and the kit is bound standard file size. Write for it...no obligation . . . no sales follow-up.

THE BOOTH FELT COMPANY
482 19th Street, Brooklyn, N. Y.
745 Sherman Street, Chicago, Ill.

1937

TRADE MARK
Booth
Precision Cut Felt Parts

ANNOUNCING

THE New SPARKS SEMI-AUTOMATIC TURNING LATHE

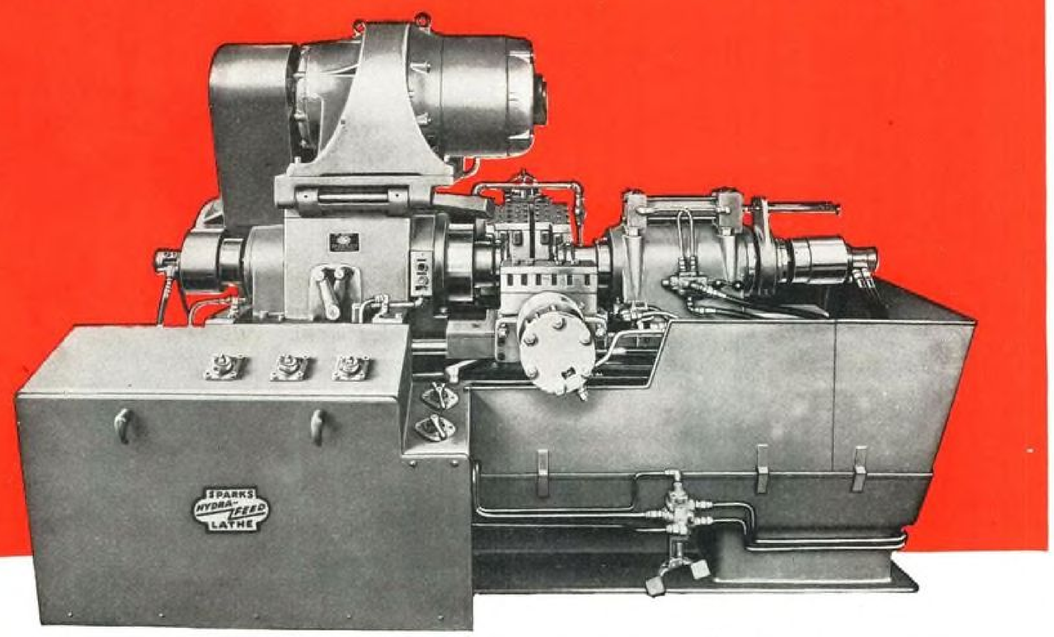

FOR HEAVY-DUTY AIRPLANE CYLINDER PRODUCTION

This recently developed multi-tool machine for turning heavy airplane cylinders has been proved highly productive in actual performance.

It is arranged to accommodate six turning tools on the front cross slide for main body turning and employs a hydraulically operated cartridge tool holder mounted on cross slide. Six tools are also mounted on back slide which also moves in and out of the work automatically. The cylinder is gripped on both ends by a specially designed holding mandrel.

A roller-bearing quill expanding arbor, attached and fitted to quill, is expanded automatically by separate hydraulic cylinder. Quill is traversed backward and forward by connection to hydraulic cylinder mounted on top of tailstock.

All feeds are controlled through conveniently located metering valves on front of machine. Holding equipment is operated through a foot treadle valve on front of machine and permits quick recovery of finished cylinder as well as rapid gripping of rough cylinder about to be turned.

Headstock, roller and ball bearing equipped throughout, provides four selective speeds for turning various size airplane cylinders. A reducing gear motor makes it possible to bring speeds down for turning cylinders of exceptionally hard material.

Write today for Descriptive Bulletin giving full information

SPARKS HYDRA-FEED LATHE **SPARKS** MACHINE TOOL CORPORATION NORWALK . . . CONN.

demonstrated that higher priced articles can absorb higher transportation costs, as has been shown by watch part shipments from Switzerland to the United States, platinum shipments from Colombia and gold shipments from Peru, British Guiana and Brazil.

A careful geographic analysis is also required, the clue having already been given by our prewar movement of commercial goods. As important as distance are mountains which, although presenting peculiar operational factors to air as well as to surface transportation, have been an important factor. There is, for example, Colombia, a small nation honeycombed with airlines as well as mountains. Air cargos there already run into millions of pounds a year. Eastern Bolivia and the Brazilian Matto Grosso are being opened up by airlines which are creating new markets. In this territory the commodity rate tariff already lists—at a few cents a pound—items ranging from jerked beef through fresh vegetables to school textbooks, all of which are moving by air in substantial quantities.

Still another part of the geographic analysis involves points now served by circuitous routes or those involving multiple transfers. For example, air transport from Buenos Aires, capital of Argentina, direct to Sao Paulo, chief industrial city of Brazil, is but a matter of a few hours, whereas boat service requires a trip of several days around Uruguay to Santos, where the shipment must be offloaded and then moved by cable railway up 3,000 ft. to Sao Paulo for a second unloading. Here the advantage of the aircraft is measured not only in time, but in distance traveled and the number of times the shipment must be handled. Non-stop flights over the great circle route direct from Chicago or Detroit to London with similar advantages in time, distance and handling are within the realm of possibility upon, or soon after, resumption of commercial air transport. Shipments from inland United States points to inland European cities involving stops will still offer the same advantages for *Airex* shipments.

Other Factors Favor Airex

Inventory, warehousing costs, credits and financing each represent important factors in air transportation's future, but they are so closely related that they are here treated together. The speed of air transport will enable the merchant to radically reduce inventories, especially of goods in the "slow moving" categories. This reduction can result in an over-all lowering of inventory, or permit the merchant to increase the number of items in stock while still maintaining the same investment and enjoying a wider range of goods for sale and much quicker turnover. Such transportation can largely eliminate the need for tying up capital in overstocking items which may eventually have to be liquidated below cost.

With faster turnover, credit terms can be shortened, even to the point where the merchant can take advantage of cash discounts. The proverbial Latin American "No hay"—we haven't it—can be changed to "Si, tenemos"—"Yes, we have it," or, at most, to "We'll have it tomorrow."

It is axiomatic, but not less important, that the more rapid the turnover and the smaller the stock of each item, the smaller will be the losses from depreciation and theft. Warehousing, with its initial costs, plus depreciation and theft losses, is even more important to the producer than to the retailer. To cite but one specific case, a machine tool manufacturer told the writer that with lowered costs for air transportation he could eliminate 25 branch warehouses and still give service equal to or better than that he is offering now.

Ground Handling

The operations departments of the airlines will be chiefly concerned with ground handling problems involving adequate loading, storing and trucking facilities. Nevertheless, it is a major problem from the standpoint of those charged with developing and maintaining traffic.

It seems obvious even now that a uniform system of door-to-door service must be established if *Airex* is not to lose a great part of its advantage. This means that the airlines all over the world must cooperate—as have the railroads in this country—to permit a shipment to move by the most direct route to destination by transfer from one line to another.

It would appear also that the lines themselves must solve the problem of getting shipments to and from airports, for thus far there has been no uniformity in this procedure. For straight air express in this country, the Railway Express Ageney has been doing the job. In other countries the procedure varies from the shipper having to call for and deliver his goods, to procedures where the airlines themselves afford pickup and delivery with their own trucks. Also, before the airlines can begin to think of carrying the equivalent of carload freight, they must devise a means of loading at factory sidings as is done today in thousands of plants which have their own sidings and who in some cases do their own loading.

If the operations departments of the airlines decide to handle their own pickup delivery it will involve an investment of many millions and the building up of a formidable organization just for this end of their business. They may delegate this function to one or more agencies, but the operations end must consider this feature. It is a traffic need but it will be up to the

While ground handling will be chiefly the concern of operations departments, it will also be a major problem for those charged with developing and maintaining traffic. Door-to-door service already appears an obvious necessity to meet competition of present surface transportation systems.

UNITED STATES
AIRCRAFT SPECIAL DRILL

This Drill gets into the tightest places . . . and deserves credit for doing so

MODEL ARD The pet of the aviation industry because of its amazingly flexible use where "ordinary" drills fear to enter. It's quite a handful for such a little fellow.

Universal motor, 750 to 5,000 r.p.m.; ball bearings in steel retainers, easily removed; close-coupled; air-cooled; switch for right or left-handed users; streamlined from tip to tip.

Easy inspection, adjustment or parts replacement

Write for details, without obligation.

United States Electrical Tools

DRILLS • DRILL STANDS • VALVE SEAT GRINDERS • VALVE REFINISHING MACHINES • VALVE REFINISHING SHOPS • PORTABLE SURFACERS • PORTABLE SANDERS • FLEXIBLE SHAFT MACHINES LATHE GRINDERS • GRINDERS • BUFFERS • POLISHERS

THE UNITED STATES ELECTRICAL TOOL CO.

CINCINNATI, OHIO, U.S.A.

operations department to find the solution and put the new plan into effect.

Selling the Service

Even though the airlines come out of the war with far better equipment than ever before, with a wealth of "know how" on cargo handling and a greater public knowledge and acceptance of the airplane as a means of transportation, they will still have to sell their service. Knowing something of the traffic problems to be faced and solved in the coming years of expansion, the airlines can make their work much easier if they set up an efficient sales force to guide the shipper. This should not be a group of traditional salesmen who obtain their business by good will and entertainment. It must be a group who are experienced merchandise and traffic men. It will be their duty to explain the advantages of speed, service, warehousing, financing, credits, and new markets which *Airex* can give the shipper. These salesmen must be constantly on the alert for new openings and new markets. They must be an integral part in the trinity of operations, traffic and sales.

New Markets

Improved equipment will greatly expand the list of *Airex* commodities, but the ultimate limits will depend a great deal on sales which will develop new markets. Air express as it is today has already created some new markets and *Airex* will accelerate this process. After considerable study and collaboration with Pan American Airways, *Time* magazine introduced a Latin American edition which today has a circulation of over 20,000 copies weekly and is on sale at most Latin American news stands on the same day that the American edition goes on sale in New York, Washington or San Francisco. Today in Buenos Aires, one can eat lobsters and oysters which have just been flown over the Andes from Chile. One of the large New York newspapers has studied the possibilities of delivering a special edition throughout the United States daily. Cuba has built up a large demand for Easter carnations from the United States; orchids have been flown here in increasing quantities from Latin America. The fragile and delicious papaya, which must be picked when it is dead ripe, can now be put on northern tables.

Lower *Airex* rates, made possible by new equipment, operating efficiency and volume sales, will make it possible for the business man to find new outlets for a growing list of both essential and luxury products, outlets which will help keep America's airlines the finest in the world.

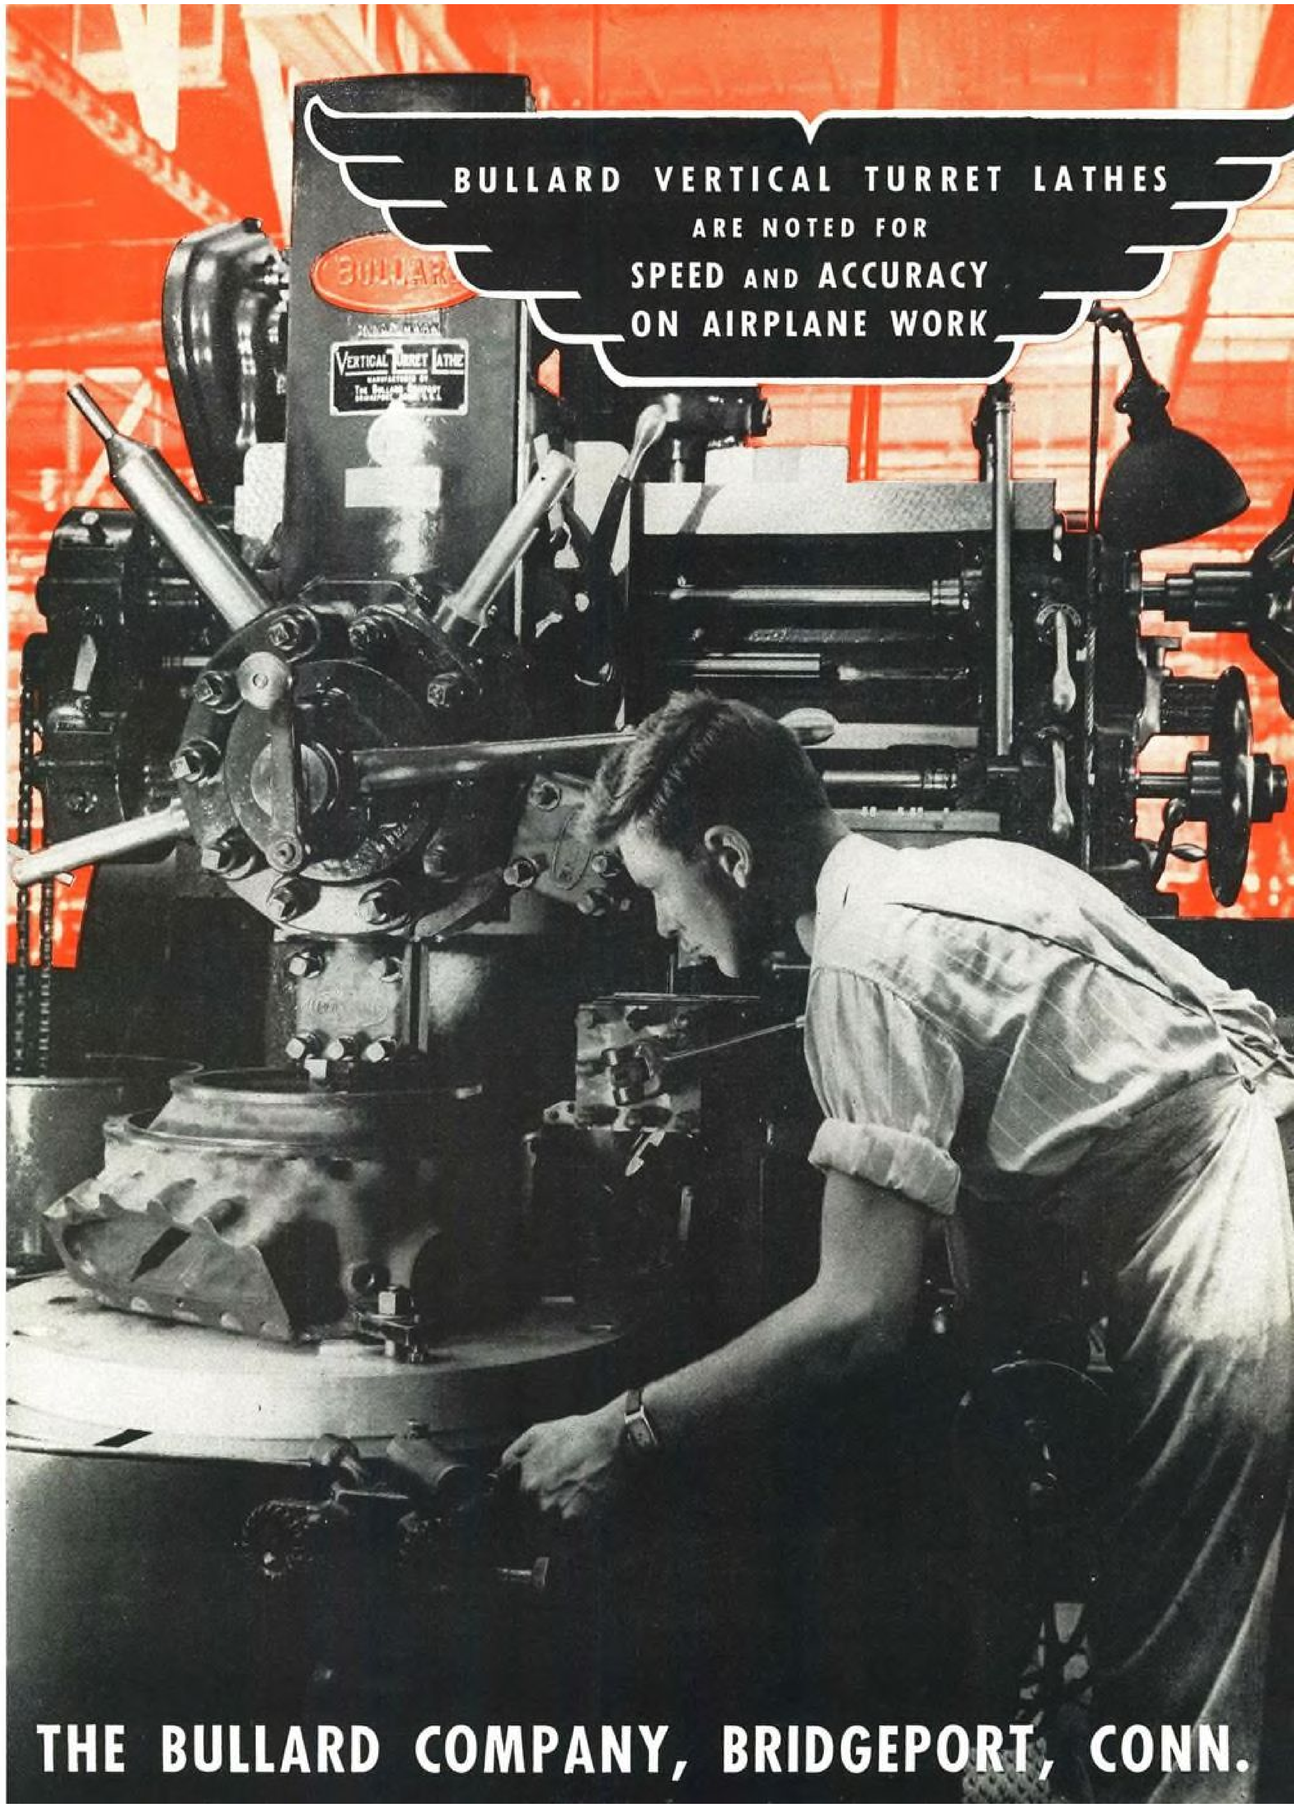

This new tracing cloth defies moisture stains and erasure scars

This new tracing cloth won't show perspiration stains or water marks—*holds pencil smudges and erasure scars at a minimum.* Now you can have clean tracings, in pencil or ink, free from these untidy "ghosts" that reproduce on blueprints!

For PHOENIX is ghost-proofed by a remarkable new process that defies moisture and gives you an unusually durable working surface. You can use harder pencils with this improved cloth and get sharper lines with less tendency to smudge. Even 6H lines show clearly, and reproduce sharply! Erasing does not mar the drawing surface; erased areas take pencil smoothly—and ink without feathering. Its new white color and increased transparency give you excellent drawing contrast and produce strong blueprints.

Put PHOENIX through your own drawing board test. See your K&E dealer, or write for a generous working sample and an illustrated brochure.

EST. 1867
KEUFFEL & ESSER CO.
NEW YORK · HOBOKEN, N. J.
CHICAGO · ST. LOUIS · SAN FRANCISCO · LOS ANGELES
DETROIT · MONTREAL

PHOENIX DEFIES MOISTURE GHOSTS . . .
Perspiration and water splashes on ordinary tracing cloth create "ghosts" which reproduce on blueprints. PHOENIX Tracing Cloth withstands actual immersion in water for fully 10 minutes at a time! *Perspiration and water marks will not stain it!*

PHOENIX LESSENS SMUDGE GHOSTS . . .
The new improved surface of PHOENIX Tracing Cloth permits you to use harder pencils (5H and 6H) and to get sharper lines with less tendency to smudge.
Result: Cleaner tracings and blueprints.

PHOENIX REDUCES ERASURE GHOSTS . . .
Ordinary tracing cloths become scarred when erased . . . erased spots produce ghosts on blueprints.
PHOENIX has a durable drawing surface that reduces working scars to a minimum.

K&E Phoenix
REG. U.S. PAT. OFF.
TRACING CLOTH
for pencil *and* ink

Navy Pilots

(*Continued from page* 241)

cooking utensils, and living quarters. And they are flown differently, too, by wheel and yoke instead of stick.

The PB's comprise a command of which any junior officer may well be proud. Here, varied ability, intelligence, ingenuity, and resourcefulness are demanded.

All this is part and parcel of naval aviation training, liberally dosed with Link Trainer work, instrument flying, night navigation, formation practice, free gunnery runs, camera firing, and bombing practice—together with certain other matters aeronautical which the Navy understandably does not publicize, this being wartime. Indeed, being commissioned as a flying ensign is no longer quite enough. The pilot must receive three additional months at any one of a dozen operational bases before he is ready to join the fleet.

As a flying officer, the Navy pilot must be both versatile and immediately familiar with the missions and mechanics of all types of combat craft. But again, that doesn't suffice. He still must receive battle training from war-tested pilots returned from aeross the Pacific. He also must learn to recognize *immediately* the silhouettes and characteristics of both enemy and friendly ships and planes. He must be able to fire four guns and a cannon at once, to spot shells, to effect east recoveries, and to know code and radio procedure. A flying fighter, yes—but also a walking military eneyclopedia.

In this war, naval aviators are much more than the "eyes and guns" of their fleet. Look at the record. They're the first line of attaek aeross the seas. They're the capital "V" in Victory.

Accumulator Systems

(*Continued from page* 155)

the hydraulic system can be seavenged out by eycling the accumulator a few times. In order to prevent air from the system from entering the accumulator the system can easily be seavenged by operating all the equipment below the pre-load pressure of the accumulator thus driving the air into the reservoir.

Various methods of mounting the accumulator in the airplane have been worked out. In the case of the floating piston unit, the problem is easy. Simple clamps can be devised for this purpose. In the case of the spherical accumulator, the problem is not so simple. Fig. 9 illustrates various methods of mounting now in use and Fig. 10 demonstrates methods used to mount the bottle type unit.

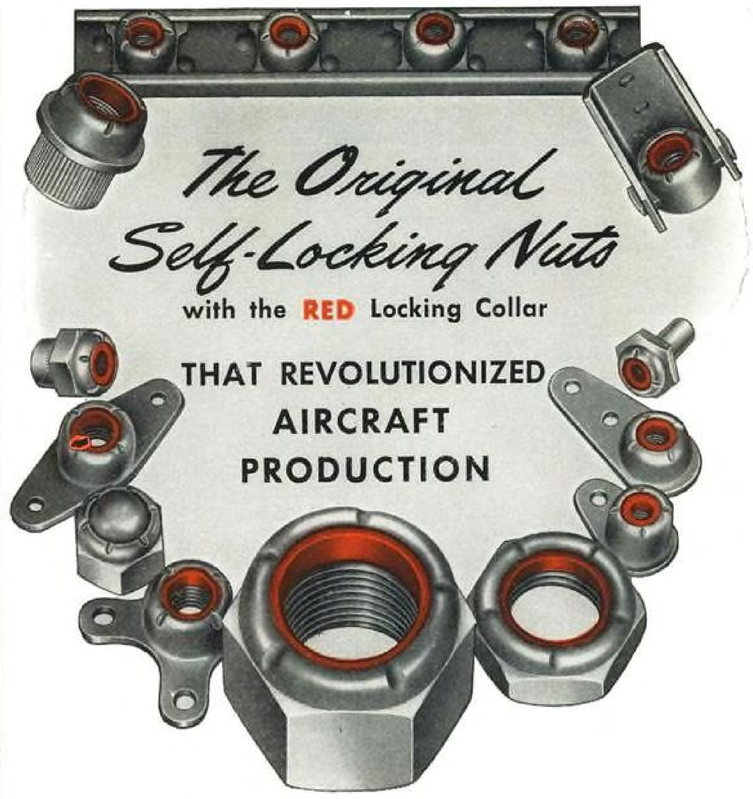

. . . NOW STEPPING UP WAR DELIVERIES

1. They save the worker's time
Each nut is a self-contained easy-to-handle unit that goes on fast . . . and its self-locking action is immediate and automatic.

2. They eliminate the dangers of careless assembly
The locking element is built into the nut . . . no pins, wires, washers, or shims that can be forgotten or incorrectly applied.

3. They reduce inspection needs
With less operations and less parts to be checked . . . there's another important saving in man-hours.

There are more Elastic Stop Nuts on America's airplanes, tanks, guns, Naval vessels, and production equipment, than all other lock nuts combined.

» Write for folder explaining fully the Elastic Stop principle

ELASTIC STOP NUT CORPORATION
2320 VAUXHALL ROAD · UNION · NEW JERSEY

New CLECO 41-L Squeezer

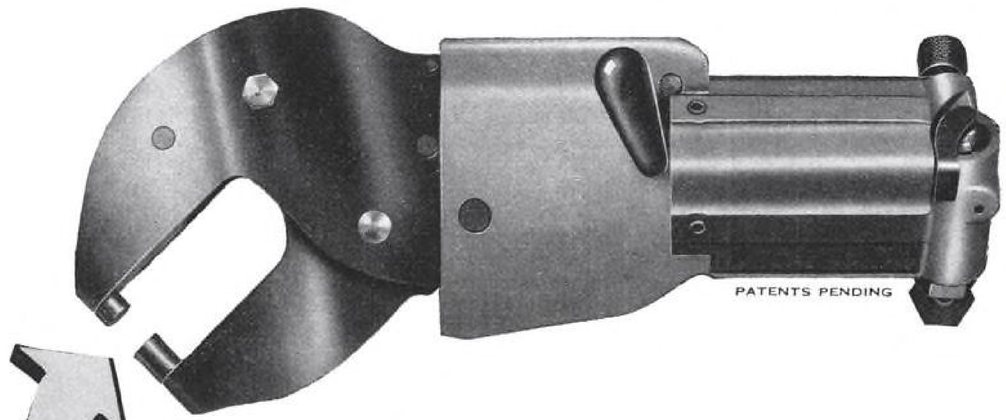

with parallel jaw action

THAT INSURES BETTER RIVETING

★ The faces of the riveter arm dolly and the anvil arm dolly of the Cleco 41-L Alligator Squeezer are *always parallel regardless of the amount of gap.* This exclusive feature prevents disalignment ("clinched rivets") and loss of rivets; it insures tight rivets with uniform heads, and does not cause distortion in the surrounding metal. ★ The 41-L is new in design, but is built to the same uncompromising quality standards that have distinguished Cleco Tools for so many years. This squeezer is light and powerful; it weighs only 5½ lbs., is 12¼" long, and has a ⅛" rivet capacity. The working gap is 15/16", with full opening of 1½". It is equipped with automatic return throttle, and adjustable pressure "pop-off," as well as return limit stop on alligator jaw. ★ To meet your wartime production schedule you can't afford to be without this unique squeezer. *Write now for complete information.*

● These sketches show how the faces of the dollies on an ordinary squeezer are parallel when the gap is small. But as the gap increases, the faces cease to be parallel. (For the purposes of illustration, the angles have been exaggerated.)



● In contrast, note how the faces of the dollies on the 41-L Squeezer are *always* parallel regardless of the amount of gap.



● The New Repairable Cleco Sheetholders with Latest Design Pliers.

THE CLEVELAND PNEUMATIC TOOL CO.

BRANCH OFFICES IN ALL PRINCIPAL CITIES

MARBLE AVE., AT EAST 77th ST. CLEVELAND, OHIO

YOU'RE ALWAYS TRYING SOMETHING NEW

THE aircraft industry never stands still. It has its memories... as these photographs show... but no molasses-in-January traditions. Even in the old photographs pictured here... and in every one... there is the healthy sign of something new being tried... new methods, new devices, new materials. Recent among the new materials aircraft engineers have successfully used is plastics, and of many plastics, Synthane is a versatile one. Synthane Bakelite-laminated is a thermo-setting plastic with many properties desirable in low stress primary and secondary aircraft parts. Chief among these properties are light weight (half the weight of aluminum) resistance to corrosion from aviation oils and gasoline, water and many acids, structural strength, resistance to change in shape with change in temperature, excellent electrical insulating characteristics, and its comparative ease of machining.

SYNTHANE CORPORATION, OAKS, PA.

EARLY MODEL OF THE "VERTAPLANE" undergoing inspection by its inventor, Gerard P. Herrick *(left)*. Mr. Herrick a captain in the U. S. Army Air Service during the World War, later succeeded in combining —in one machine—the efficiency and speed of a fixed wing airplane with the convenience and safety of a rotating wing type by releasing and rotating an upper wing surface. His machine is now called a "Convert-a-plane." (All photographs courtesy of Aero Digest)

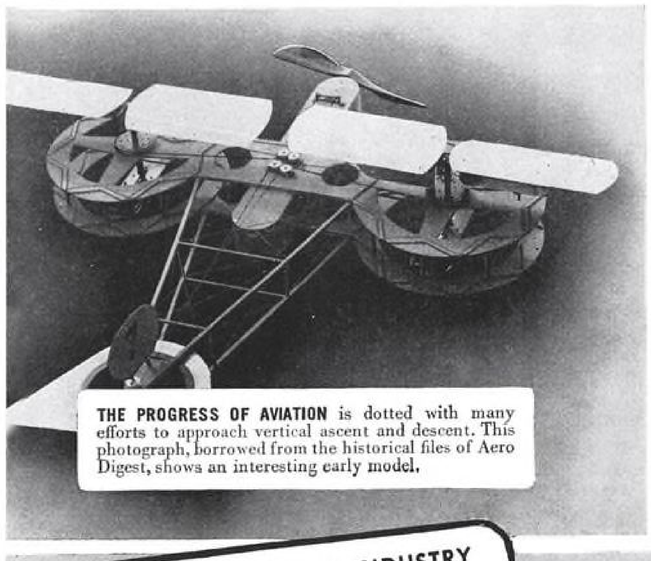

THE PROGRESS OF AVIATION is dotted with many efforts to approach vertical ascent and descent. This photograph, borrowed from the historical files of Aero Digest, shows an interesting early model.

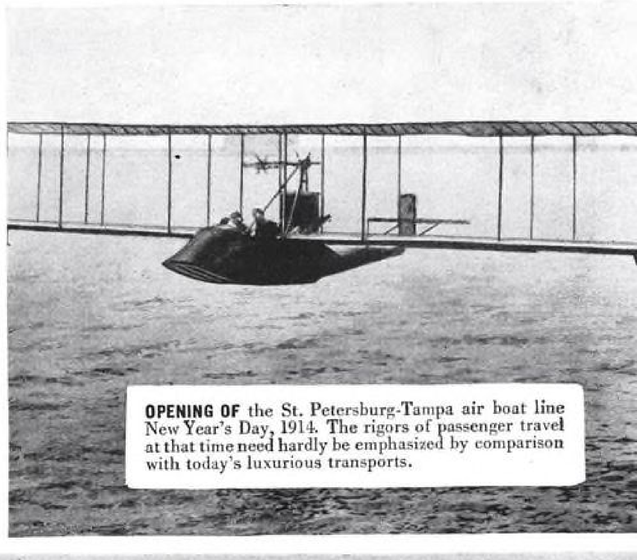

OPENING OF the St. Petersburg-Tampa air boat line New Year's Day, 1914. The rigors of passenger travel at that time need hardly be emphasized by comparison with today's luxurious transports.

THE AVIATION INDUSTRY *OK's* SYNTHANE BAKELITE-LAMINATED for

LIGHT WEIGHT with Structural Strength
LIGHT WEIGHT with Corrosion Resistance
LIGHT WEIGHT with High Dielectric Strength
LIGHT WEIGHT with Ease of Machining

SYNTHANE TECHNICAL PLASTICS

SYNTHANE Bakelite—laminated

SHEETS • RODS • TUBES • FABRICATED PARTS • SILENT STABILIZED GEAR MATERIAL

Materials to remember, specify and use for aircraft parts

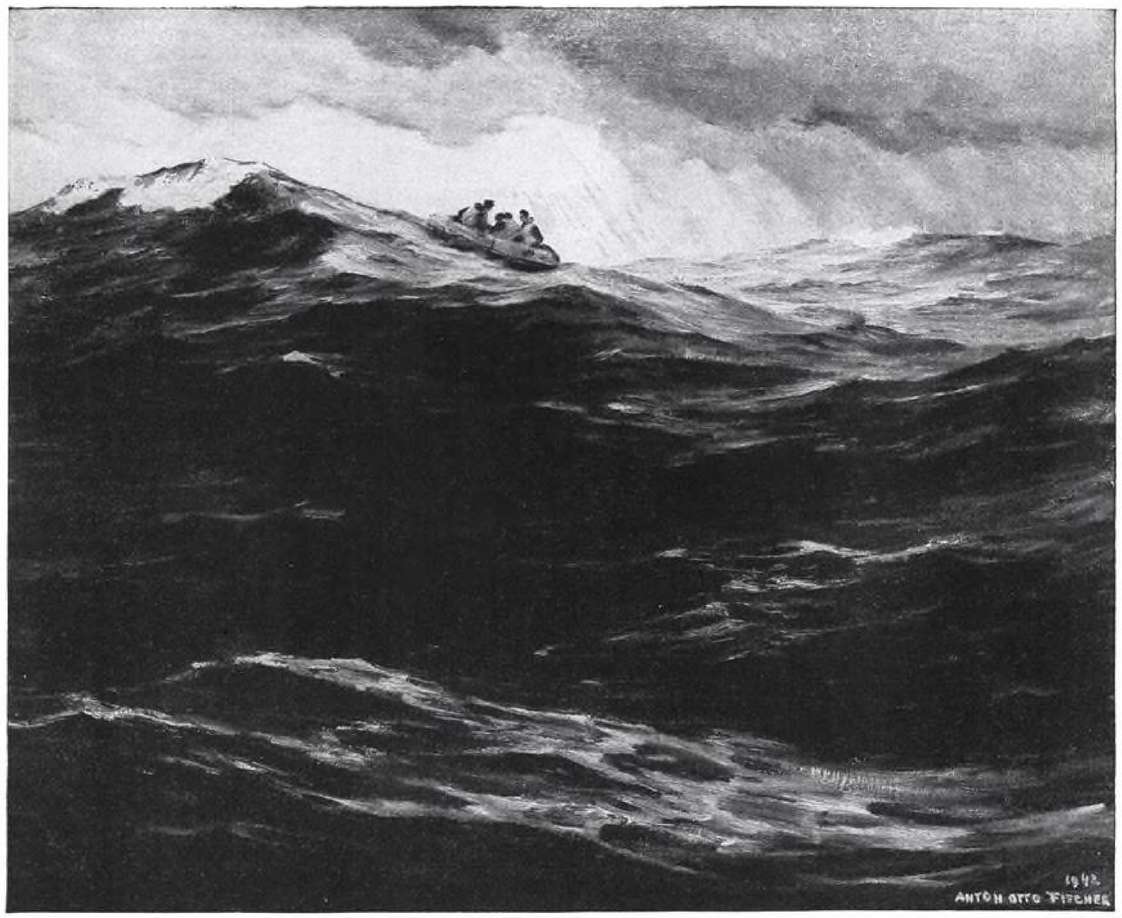

AIR – against WATER

Rising and falling with the waves . . . men on a rubber raft . . . human lives snatched from the sea . . . by a thin layer of inflated rubber.

Important? Yes. It's important that the thin sheets of rubber be kept free of cracks and blisters, that the raft unfold easily, that it be *safe* when it's needed.

That's why rubber life rafts are processed in special air conditioned rooms . . . to make the rubber tough and long-lasting. *Room temperature and humidity are maintained more exactly than ever.*

To do jobs like this, air conditioning equipment must be more precise, more flexible, more compact. Required "climates" must be reproduced faithfully . . . wherever and whenever wanted.

General Electric has already taken an outstanding part in developing this new kind of air conditioning for war industries. After the war, *all* users of air conditioning will benefit from the lessons we have learned in meeting these stringent war requirements.

More people will enjoy air conditioning because it will be more compact . . . more economical. Cars will have it. Also planes and boats. Small stores, as well as large, will want it to increase sales, to keep goods fresh. Factories will demand it as an aid to production.

The place to turn for this new equipment will be General Electric . . . a logical source of heating, refrigeration, air conditioning, and heat transfer equipment of all kinds. Turn to G-E.

Air Conditioning and Commerical Refrigeration Department, Division 427, General Electric Co., Bloomfield, N. J.

Air Conditioning by

GENERAL ELECTRIC

Plywood Structures

(*Continued from page* 149)

skin are permissible due to the increased skin thickness in the lower density material. There is not the same weight economy possible in stiffened plywood shells by close stringer spacing that is found in stiffened metal panels. In the latter material small stiffeners carry an appreciable "effective" width of skin. The interaction between plywood plates and stringers is still under investigation but indications at this time are that the applicable rules will be substantially different from those which are used in current metal practice.

Direction of grain in fuselage veneers has been largely a matter of the designer's judgment. In fuselages of large cross section and length avoidance of scarf joints in the veneers has led to the use of the face grain at 45 deg. to the thrust line. The effective modulus of elasticity varies with grain angle and is approximately 260,000 psi. for grain angles at 45 deg. A somewhat simplified design approximation of sizes is possible with this veneer arrangement since the resulting skin panel has a low modulus of elasticity resistant to stresses parallel to the thrust line. It is then not unreasonably conservative to neglect the skin and to design stringers of sufficient substance to resist the bending stresses as a first approximation. The skin is in turn designed to carry the shear. This system has been reasonably well borne out by static test.

The Old Shoe

(*Continued from page* 103)

has become world famous in the last decade, is proof of the sturdiness of this type craft.

This veteran of the sky, the original DC-2 transport, was the first of the model to be delivered to any airline. It was turned over to TWA in the spring of 1934 and had flown nearly 2,000,000 mi. as a member of TWA's fleet when it passed a stiff physical examination in 1941 and became a member of Great Britain's military supply forces. It was then as mechanically sound as the day the airline received it seven years ago.

This is a tribute to the work of airline maintenance experts. William Maxfield, our maintenance superintendent, has veteran master craftsmen at each of our principal stations. When these specialists have gone over every inch of a plane before it rolls up the runway for the takeoff, that plane is as perfect as though it just had left the assembly line at the factory where it was built.

CABLE TERMINALS

★ *All Standard Types*

★ *All Required Sizes*

★ *Millions being supplied to leading manufacturers*

PN

Copies of the complete P & N Catalogue are available to industry personnel when requested on company letterheads.

POULSEN & NARDON, INC.

LOS ANGELES · CALIFORNIA

Helping Service...

the Mobile Units of Our Armed Forces

Lubrication of trucks, jeeps, tanks, planes and all other mobile units — inflating tires — pumping gas — powering repair units — these are but a few of the scores of jobs on which Briggs & Stratton instant-starting gasoline motors are now doing their part—furnishing dependable power to speed up this work with our armed forces everywhere.

In the War Program of the United Nations, Briggs & Stratton 4-cycle, air-cooled motors are now giving the same kind of service that has made them world famous — "preferred power" wherever gasoline powered equipment is used.

If you are now planning post-war production of gasoline powered equipment, we would appreciate the opportunity of consulting with you.

BRIGGS & STRATTON CORP.
MILWAUKEE, WISCONSIN, U. S. A.

4 CYCLE
BRIGGS & STRATTON
GASOLINE MOTORS

Maintenance with the AVG

(*Continued from page* 106)

rounding territory. From these depots dispersal of all essential maintenance material is then made. Dispersal is all-important—but it can be overdone, and it will work effectively only when there is a good inventory and record-keeping system, so that you will always know where certain material is when it is wanted.

The dispersal system is the heart of the Chinese Army material policy, and is dictated by the necessity of hiding supplies from the "brown dwarf raiders." Secrecy is so rooted in the dispersal system that it is practically impossible for the Japanese airmen to locate it, or, for that matter, for the Chinese high command and China's Allies—to find records of the location of material once it has been dispersed, China style. It might be argued that there is no reason why the dispersal of material could not be fully recorded; but the secret dispersal system had made each unit of the Chinese Army an independent fighting unit and China's total strength an unknown quantity through more than four years of war.

I called the attention of Col. Chennault to this inefficient situation. I told him, on more than one occasion, that the aircraft material supply department was so vital to the AVG that he should take on the job of running it, as a matter of self-preservation.

"The AVG," said Chennault, "is a tactical fighting unit. As such we are interested but cannot possibly run a maintenance unit other than simple ground service operations on the field. These operations cannot exceed 15 min. in duration. If a plane cannot be prepared for flight within that quarter-hour, it should be withdrawn to a dispersal point for servicing by other maintenance personnel."

Subsequent events proved the soundness of Chennault's decision to undertake only First and Second Echelon maintenance. As to the secret Chinese dispersal system it remained, but my right-hand man, Teh Chang Koo, set up his own inventory system. He kept notes in a little book—and remembered much more in his head—which was just as well.

When we finally had things in running order our principal bases for maintenance and service were at Kunming, Loiwing and Rangoon. An important corallary to this was the establishment of satellite fields. These may best be described as small, well-camouflaged fields not too distant from the principal bases and accessible by a system of communications. Satellite fields are invaluable, when a main base is

(*Turn to page* 319)

30 Ounce Miracle

that Revolutionizes Starting Ignition

"MIRACLE?" Well, miraculous at least for the way it is strengthening American air might in the frozen wastes that may become the main thoroughfare of this global war.

For as aviation engines have constantly grown in size and power, one major difficulty has been the problem of providing adequate all-climate starting ignition.

Today this problem has been solved by the American Bosch Induction Vibrator . . . a simple device small enough to put in one's pocket. From the Equator to the Poles—winter or summer—engines in United Nations planes can now start in a flash and get into the air more quickly.

This development—begun in times of peace under the American Bosch policy of relentless research in every phase of its field—has been completed in time to meet intensified military demand. Broadening the potential battle zone of every plane in which it is installed, it serves the cause of Victory by helping to open new fronts for American and Allied air strategy.

★ ★ ★

American Bosch Corporation • Springfield, Mass.

Craftsmen in the New England Tradition

★ AMERICAN BOSCH ★

AVIATION & AUTOMOTIVE ELECTRICAL PRODUCTS . . . FUEL INJECTION EQUIPMENT

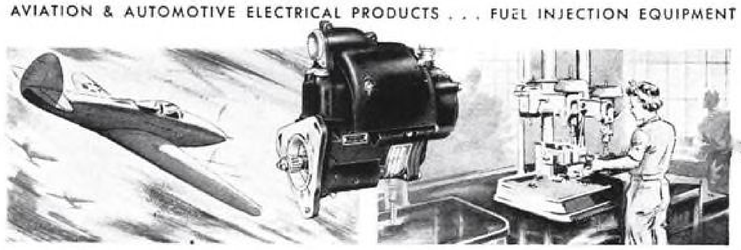

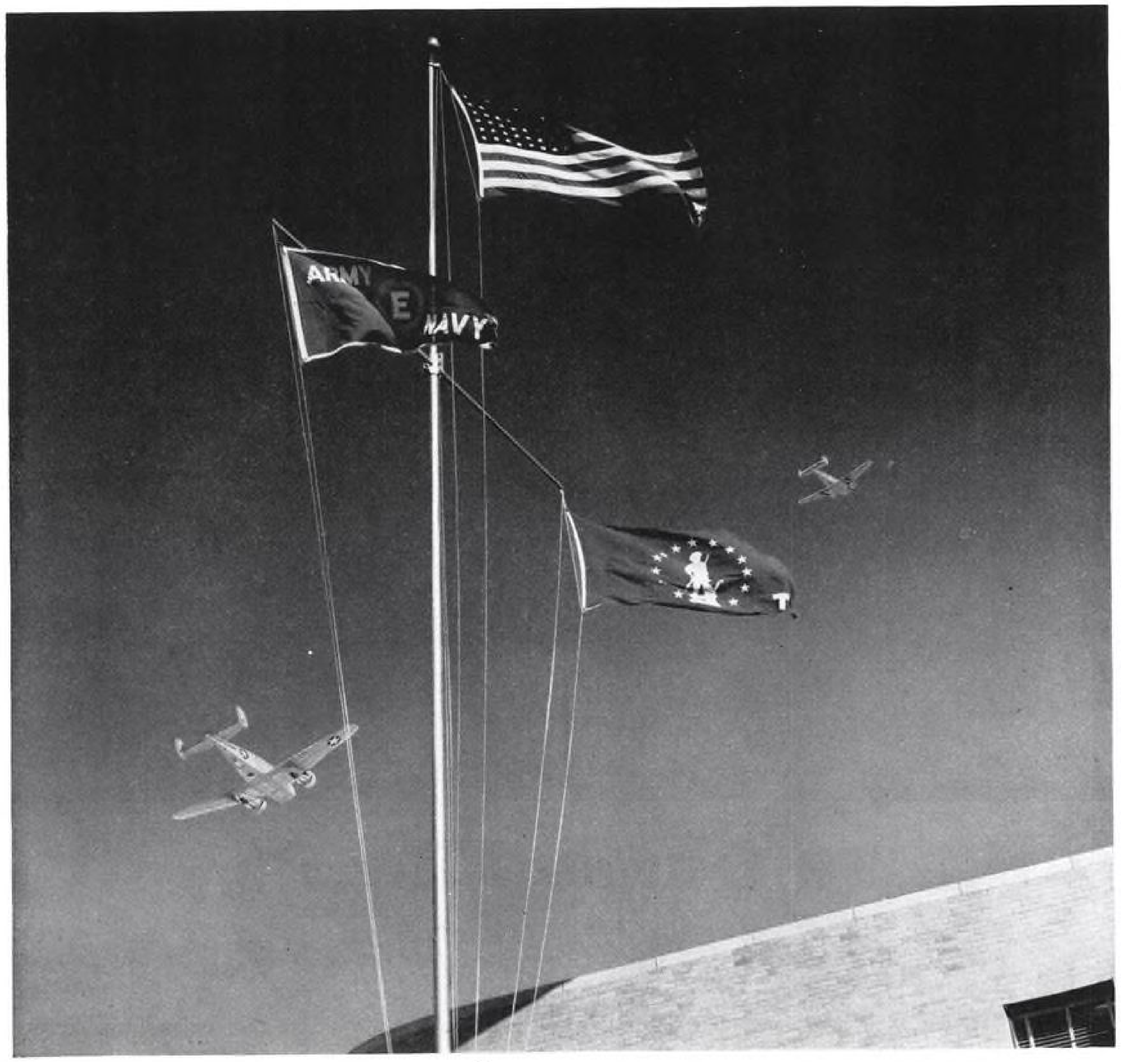

Symbols

Beechcrafters are doing their part; and
these are the symbols of their devotion

Beech Aircraft
CORPORATION
BEECHCRAFTS ARE DOING THEIR PART
WICHITA, KANSAS, U.S.A.

(*Continued from page* 316)

bombed out and emergency landing and service ports are needed. It was the lack of satellite fields which finally made our Magwe, Burma, base untenable. But satellite fields are not of much value unless you can camouflage them for safe dispersal of planes.

Importance of Mobility

The first all-out bombing of Rangoon on Dec. 23, 1941, taught us many valuable lessons, not the least of which was the need of a high degree of mobility for all service and maintenance units. Seeing this lesson clearly in the rubble dust of our Rangoon base, Squadron Leader John Newkirk and Crew Chief Fox called a meeting. I was delegated to appeal for help from Lieut.-Col. R. J. Twitty, commanding officer of the American Military Mission in Rangoon. I told him that without vehicles our ground force was unable to protect its materials, and the AVG, which was already showing its mettle, would be out of the war. With the colonel's help, we eventually rounded up, from British, Chinese and other sources, four Chevrolet Command cars, six GMC 6x6 trucks, six Studebaker and Chevrolet tank trucks, complete with pumps and equipment for refueling planes, and six jeeps.

We used the 6x6 trucks for handling communications, tools, parts and other things of that type, as well as for transporting members of the ground crew.

The motorization which resulted from this move was our salvation. When the air alarms sounded all planes, on the alert and ready under Chennaults 15-min. rule, took off. While the planes were still circling for altitude, the ground crew was already busy loading all materials on the field for operations on the trucks, which they then drove hell for leather to previously designated dispersal points.

In most instances, the squadrons took off within 2 min., while the ground crews cleared the field in approximately 3. Any plane, incapable of flight, was dispersed along with the trucks. If the Japs succeeded in coming over all that they found was a bare field and whatever buildings had not been bombed out previously. With the Flying Tigers on their tails, it was impossible for the Japs to hunt out the evacuated trucks and strafe them. No one in the ground crew ever got hurt after this system was put in operation.

As soon as the raid was over we would be back on the field, preparing for the landing of our P-40's. Often we would have to fill in bomb craters to get the fields in shape—but at least we were there to do it.

This experience proves to my com-

Christmas Greetings

FROM

The Employees

OF

The Pressed Steel Co.

THE MARK OF QUALITY
PS CO.

THE PRESSED STEEL COMPANY
of WILKES-BARRE, PENNSYLVANIA

BRANCH OFFICES:

DETROIT: 312 Curtis Building • TOLEDO: 1914 Vermont Avenue
CHICAGO: 205 Engineers Building • NEW YORK: 254 West 31st Street

PRESSED STEEL COMPANY PRODUCTS: Carburizing and Annealing Boxes, Thermocouple Protection Tubes, Seamless Steel Cylinder Caps, Seamless Steel Neck Rings, Welded Alloy Tubing for High Temperature and Corrosive Application

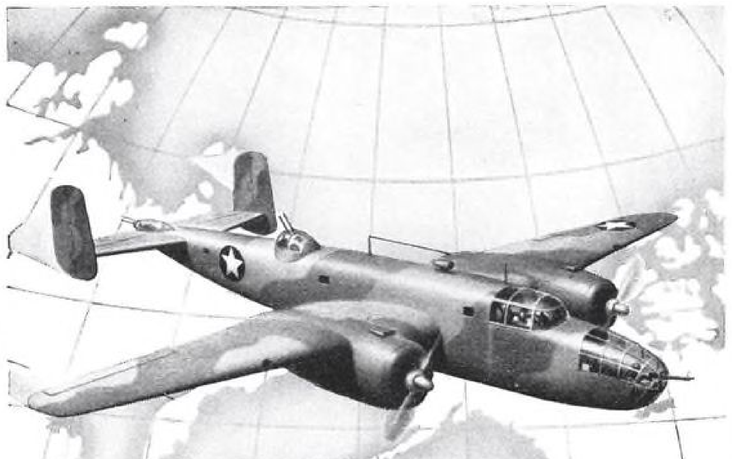

THEY'VE GOT THE RANGE

Essentially, bombers are artillery of tremendous range (ask Tokyo) and exceptional accuracy.

Contributing to this range are Delco aircraft fuel pump motors for transfer duty, assigned to safeguard the flow of fuel from multiple tanks on American bombers. Lightweight, compact and dependable, these motors conform to latest military aircraft requirements.

Similar Delco fuel pump motors, driving booster pumps, are factors in the speed, climbing ability and maneuverability of our fighter planes. Delco Products has applied its long experience in precision manufacturing to this assignment, and to the building of other aircraft equipment and naval and ordnance materials.

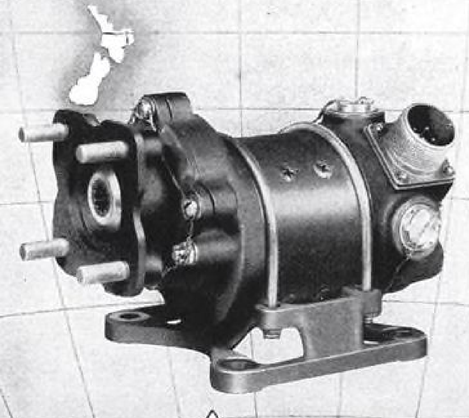

DELCO PRODUCTS MOTORS

DIVISION OF GENERAL MOTORS CORPORATION DAYTON, OHIO

plete satisfaction that complete motorization of the ground service organization is as important to the success of a combat unit as its planes, when the unit is located within the bombing range of the enemy. In bases so situated, we should forget about hangars and permanent structures of all sorts. Your base is the first objective of the enemy, and you are bound to be hit there sooner or later. The answer is vehicles to move your ground service crew to hidden dispersal places during the attack.

Communications

Finally and of almost equal importance to effective and successful servicing and maintenance in the field is communications. Auxiliary communications are vital, during air action, to not only the base field but to the so-called satellite fields. When this goes, as happened in the case of the big December bombing on the Rangoon base, it not only imposes an enormous handicap in the successful conclusion of the actual aerial battle, but it prevents ground service from being prepared to perform properly its duty at the conclusion of the battle. When the smoke cleared after the Rangoon attack it was discovered among other things that our one radio set was out of action. No arrangement had been made for an emergency hook-up to the field. To all intents and purposes we were isolated from the outside world. We finally solved the situation by running emergency telephone lines from the main base hangar to the alert tent at the dispersal base; and we never forgot the final lesson which pointed the need for auxiliary emergency communications means to all of the principal points of our operations.

P-40's in Burma

(*Continued from page* 101)

tected airplanes caused the metal to get so hot that the workman could not touch them. This necessitated the construction of about eight mat sheds in the flight test area under which the airplanes could be placed when it was necessary to work on them (Fig. 9). A small hangar, accommodating two airplanes, was constructed in the flight test area and it was used for working on those airplanes where the cowling had to be removed and the airplane had to stand exposed for several days. (Fig. 10.) The airport was of ample size and was used by the Royal Air Force as a base for their operations. The north-south runway was 3,000 ft. long and the east-west and the northwest-southeast runways were each 2,500 ft. long.

(*Turn to page* 323)

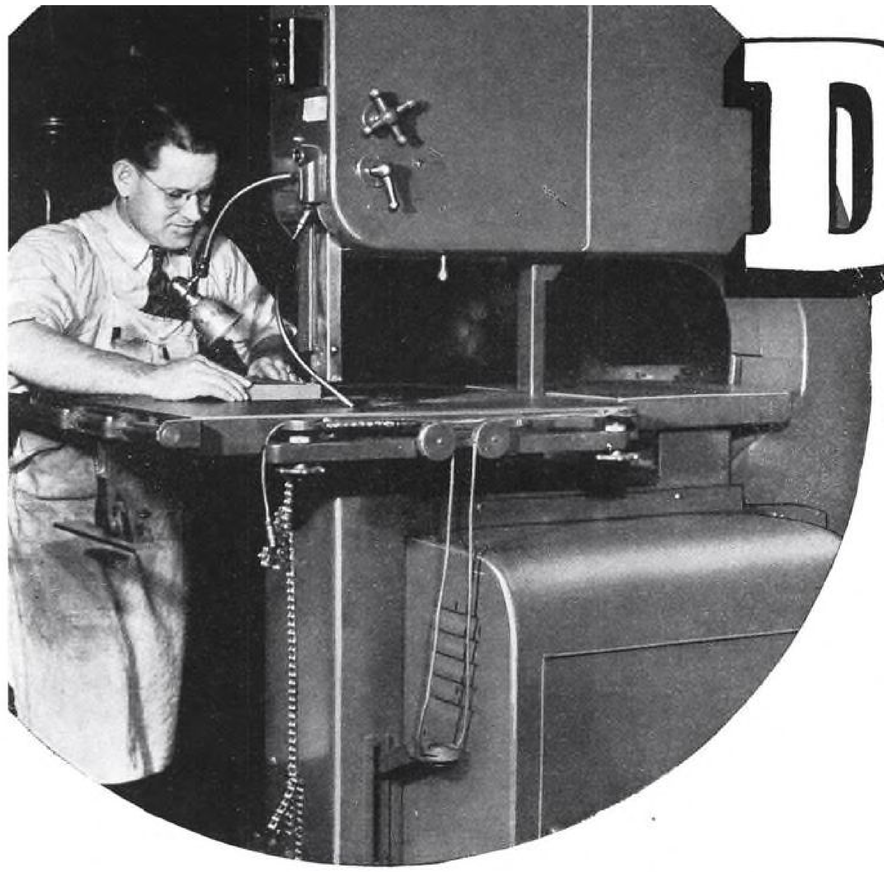

DoAll at Ryan

Left—View of DoAll at work making blanking dies in the Ryan plant. A great deal of time is saved because it is not necessary to drill holes around the die outline and laboriously file to the final contour.



REPAIR SHOP ON WHEELS

Illustrated is the exterior of one of the U. S. Air Corps mobile machine shops used for repairing damaged planes right on the spot. The DoAll is part of the equipment of each unit.

THE TIME STRETCHER

Wherever parts are made, planes assembled or repaired, DoAll is doing a Herculean job. Search the world over and you'll never find a machine to beat the DoAll when it comes to versatility and speed in precision cutting of aluminum, magnesium, synthane, Masonite, plymetal, stainless steels, plastics, wood, etc.

* **Cuts thick sections of any metal or material.**
* **Does both internal and external cutting, following a hairline outline.**
* **Cuts so clean, further machining is unnecessary.**
* **Relieves miller, shaper and lathe of hundreds of over-load jobs.**
* **Eliminates bottlenecks on regular production lines.**
* **Avoids shut downs of important machines by actually making new replacement parts.**
* **Makes special tools without dies or molds.**
* **Saves hundreds of man hours—tons of metal.**

Strip-Out Container

Pat. No. 2,255,577
Des. No. 127,313
Other Pats. Pending

WANT TO SEE IT WORK?

A factory trained man will call with a DoAll and show you how this wonder machine will aid in getting your jobs out ahead of schedule. EASY READING—"DoAll on Production", an illustrated book you'll want to send for today.

CONTINENTAL MACHINES, INC.

1305 S. Washington Avenue, Minneapolis, Minn.

Associated with the DoAll Company, DesPlaines, Ill., Manufacturers of Band Saws and Band Files for DoAll Contour Machines.

The EXACT SIZE for Every Department

All Models with Motors

Under $5000 Under $2500



Under $2000 Under $1500 Under $1000

FLEETWINGS

Aircraft Parts Help Re-paint Another Sign...

NINE months ago, as an indication of the spirit with which Fleetwings' men and women were turning out increased quantities of aircraft parts, the company re-painted its "Defense Plant" signs . . . changed their wording to "*Attack* Plant."

Today, the total of Fleetwings parts rolling off our assembly lines is greater than ever! And Fleetwings parts... wings, flaps, stabilizers, ailerons, fuselage sections, hydraulic equipment . . . incorporated into American fighting 'planes, are helping to turn the "No Man's Land" on the air-fronts into "U. S. Territory."

Of course, today's vast production at Fleetwings is all earmarked for war. But for peace, Fleetwings' engineers already have plans on the drafting boards. With Victory they will grow and shape themselves to help fly America to her ultimate destiny in the skies.

★

FLEETWINGS
Incorporated
BRISTOL • PENNSYLVANIA

FLEETWINGS
pioneers with parts and hydraulic equipment



The BT-12, all-welded basic trainer built for the U. S. Army Air Forces.

CREDIT FOR THE FIRST all-welded military 'plane constructed principally of stainless steel goes to Fleetwings for the BT-12. A fleet of these sturdy, airworthy basic trainers is now a-building at Fleetwings for the U. S. Army Air Forces.

THE GROUP of time-saving production tools designed by Fleetwings' employees continues to grow each month. Newest of these tools is an electric "mouse," an intriguing little device to aid loftsmen in drawing extra long straight lines. The "mouse" improves accuracy and greatly reduces drawing time.

ONE OF THE REASONS for the outstanding "in-service" record of Fleetwings-designed hydraulic equipment lies in the grueling testing each hydraulic valve and jack must undergo before it leaves our plants. Valves, for example, undergo proof tests, body pressure tests, heat and cold tests, and torque tests in addition to a check on dimensions which rejects variations greater than two one-hundred-thousandths of an inch. Fleetwings hydraulic equipment is designed for use on U. S. 'planes to actuate retractable landing gear, bomb doors, wing flaps, etc.

SAVING SIZABLE sheet-metal remnants and using them systematically for forming small-assembly pieces is another measure that Fleetwings has originated to help win the "War on Waste." Time, money, and effort—all are saved by this unique, sound system.

"KEEP 'EM FLYING!"

FLEETWINGS
Incorporated
BRISTOL • PENNSYLVANIA

(*Continued from page* 320)

The runways had a crushed rock base with a rolled gravel surface. It was usable in all kinds of weather but the loose gravel was easily picked up by the propellers, and was a source of constant annoyance. The approaches to the runway were only fair as there were trees on all sides except to the south.

As soon as the airplanes were flight tested and all necessary adjustments were made, the headquarters of the American Volunteer Group located at Toungoo, Burma, were notified and they sent pilots down to take delivery and ferry them from Rangoon to Toungoo. The last airplane was delivered on Nov. 26, 1941, and the American Volunteer Group pilots got their first taste of action along the Burma Road on Dec. 20, 1941.

America at War

(*Continued from page* 95)

home. A swarm of barnyard chickens is no match for a fighting cock. The thing to look for is victories against the enemy, destruction of his ships and his military and manufacturing works.

The air cargo program has been increased again. There is no official information on the extent of the increase, however. The plan a few months back was to turn out hundreds. There are no exciting new planes in the cargo class for the immediate future, although several very big ones are nearing the experimental stage. Mostly, they are the tested types everyone knows about.

Most interesting recent development in cargo is an order placed by the Army for the production of 1,200 wood cargo planes by Andrew J. Higgins, the New Orleans builder of combat boats. The Higgins plane is not a new design; it is the Curtiss-Wright C-76, plywood, two-engine transport, roughly the size of the Douglas DC-3. Curtiss-Wright has already tested this plane, and it has been accepted by the Army.

With many aircraft plants slowed down for lack of materials, it is easy to wonder why an order is given to still another plant, which has no airplane experience. There are many partial answers, and one of them is salesmanship. Higgins is a man of imagination and audacity who believes he can do most anything he tries. It was he who devised an assembly line for the construction of Liberty ships, and sold it to the Maritime Commission. It probably would have worked, but there wasn't enough steel plate, and the project was stopped. Higgins has been building torpedo and other kinds of attack boats for the Navy, out of plywood. He makes them so tough they can be run onto a stony beach full tilt without breaking up. He amazed the Navy by building a troop-landing boat that slithers right out on land. It was probably the President himself who let Higgins have the order. Mr. Roosevelt inspected Higgins' abandoned assembly-line shipyard; he looked at a sample of Higgins' basket-weave plywood. F.D.R. likes people who are not afflicted with inferiority complexes.

A few notes to add to background: The B-17 has been bombing and strafing from mast-top levels, though it was originally a high altitude bomber. We are finding out that hitting ships from high up is very difficult, because they are learning to turn while the bomb is falling . . . New Zealand's Army is under United States command and its flyers are fighting with United States forces in the Solomons . . . The biggest aircraft assembly base on any front is in Africa; British and American planes stream out of it to Near East bases . . . Russia does not believe that air power alone can win the war, and is very critical of British and American hopes to avoid ground battle by destruction of Germany from overhead . . . One of the biggest surprises in recent air war was Britain's big *Lancaster* bomber raid on Europe in broad daylight without losses; that was supposed to be exclusive for B-17's and B-24's . . . Biggest loss of the B-17's in Europe so far was three in one day . . . 1,000 Axis planes have left their skeletons on Malta's rocks and in adjacent waters . . . Counting up the wood airplanes now in the war—trainers, transports, Britain's *Mosquito*, its half-wood *Hurricane*, Russia's first-line wood fighters, and the prospect of a wood *Spitfire*—one begins to wonder what we are going to do with all that aluminum our plants will turn out next year.

Field Experience Back to Plant

(*Continued from page* 125)

representatives must play an important part in seeing that the damaged aircraft are properly repaired, such knowledge is constantly drawn upon.

After a man is selected he is given a comprehensive, special training course at the plant which lasts from ten to twelve weeks. Upon graduation he is given a domestic assignment as a junior service representative, and works under the guidance of a senior service man. It generally takes six months' experience as a domestic service man before we feel he is qualified to accept a foreign assignment. Work in foreign fields requires considerable initiative, as in many cases the equipment with which work has to be done is limited

"For Excellence of War Production"

OUR NO. 1 JOB . . .

The Army-Navy "E" burgee that flies over the Packard Electric factory means more to us than an award for work well done. It is a constant reminder of the work that lies ahead . . . building more and more equipment to meet the requirements of America's planes, tanks, trucks and military vehicles of all kinds. No other considerations, no obstacles, can stand in the way of this vital assignment. It is our No. 1 job, and we will see it through. Packard Electric Division, General Motors Corporation, Warren, Ohio.

Packard
REG. U.S. PAT. OFF.
TRADE MARK
"Working for Victory"

THE STANDARD WIRING EQUIPMENT OF THE AUTOMOTIVE INDUSTRY

and has to be adapted, or is nonexistent and has to be created.

We have formed a unique organization known as the "Certified Service Representatives League," to which all field service representatives are admitted upon graduation from the factory school. In order to continue membership after they have proceeded to various parts of the world, however, each must answer a series of questions which are drawn up every month and which must be completed and returned to the home office. In this manner the home office is able to keep a close check on the ability of field representatives to handle the jobs assigned to them.

Each field representative returns to the home office every six months for the purpose of making first hand reports, polishing up on new developments, and discussing possible new assignments. These face-to-face discussions of problems encountered fill in much between-the-lines information of their written reports, and add to the knowledge of both the field men and the home office. Because we cannot afford to entrust critical work to men who dislike their jobs, we insist that each field man renew his contract, so to speak, for field assignment every six months. This provides a routine avenue of escape from unpleasant work for those who do not like such work, and assures our armed forces that only competent, up-to-the-minute, enthusiastic field representatives are on the ground, forming a connecting link between operations and manufacturing.

North American's educational program, which is conducted at the plant for the Army Air Forces officers and enlisted men who will maintain and repair B-25 *Mitchell* bombers in the field, is also an important part of our efforts to keep the equipment in working condition at the several fighting fronts. Each month hundreds of men, most of whom are graduates of the Army basic mechanics schools, are sent here for specialized training. Experts from the factory serve as instructors, meeting classes that are operated on a 24-hour-a-day basis. Motion pictures, slides, demonstration boards, and actual airplanes are used to train these men. When they complete the courses they are thoroughly familiar with our airplanes and are able to properly diagnose any mechanical trouble and know how to correct it.

A plan is now under consideration to assign each graduate of this school to a specific airplane during its final stages of construction in order that he might travel with the plane when it is delivered, and stay with it as long as it is in use. In this way each mechanic will look upon the airplane as his own

(*Turn to page* 327)

Let PRESSTITE *Aircraft* SEALING COMPOUNDS Solve YOUR Aviation Sealing Problems

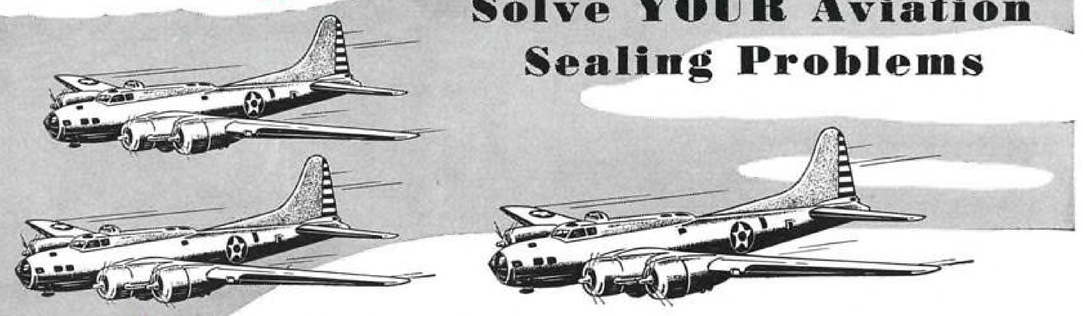

Since their introduction to the aviation industry a short time ago, Presstite Aircraft Sealing Compounds have won wide acceptance by the aircraft manufacturers of America.

Especially developed for your industry—engineered to solve many of your problems—these Presstite Compounds provide fast, simple and long-lasting methods of sealing a wide variety of aircraft joints—especially in aviation *fuel tanks*. Their ease of application speeds production—proven adhesive qualities reduce maintenance, assure satisfactory sealing under all conditions.

All Presstite Sealing Compounds are available for immediate shipment.

No. 2D-126A Permagum

A non-corrosive, non-drying, non-hygroscopic, non-polymerizing, permanently elastic, rubber-like material used as a plugging or sealing material to seal larger openings in corners or seams of fuel tanks. Not soluble in Aromatic Fuel.

Plywood Fuel Tank Sealer

For sealing light-weight plywood and plastic auxiliary airplane fuel tanks. Brush—spray, or slush type—resists aromatic fuels.

Extruded Fuel and Oil Tank Sealers

Easy to handle because in extruded form on cloth backing—varied widths and thicknesses. Highly adhesive to metal surfaces even in presence of liquid hydrocarbon. Non-oxidizing, non-polymerizing, resists aromatic fuels.

Extruded Sealer for Synthetic Glass

Seals joints in aluminum as well as synthetic glass—especially designed for windshields, windows and gun turrets. Stands up under extreme low temperatures. Seals joints tight against water, air, aircraft fuel, motor oil. Permanently elastic.

Fuel Tank Sealer

Brush-on type for sealing integral tanks and for seams and joints in bolted tanks used for aromatic fuel storage. Will not slump up to plus 200° F., remains flexible at minus 90° F.

Cabin Sealer

For sealing over riveted joints in pressurized high altitude ships. Provides water and air-tight seal—withstands temperatures from minus 90° F. to plus 212° F.

Zinc Chromate Compound

For Conditions A and B, Air Corps Spec. No. 3596, and Slushing Compound Air Corps Spec. No. 3595.

Let Presstite engineers help you to solve any sealing problem in your industry. Send us complete detailed information on your needs and specifications today.

PRESSTITE SEALING COMPOUNDS

PRESSTITE ENGINEERING COMPANY • 3910 Chouteau Ave., St. Louis, Mo.

Question every fastening job...

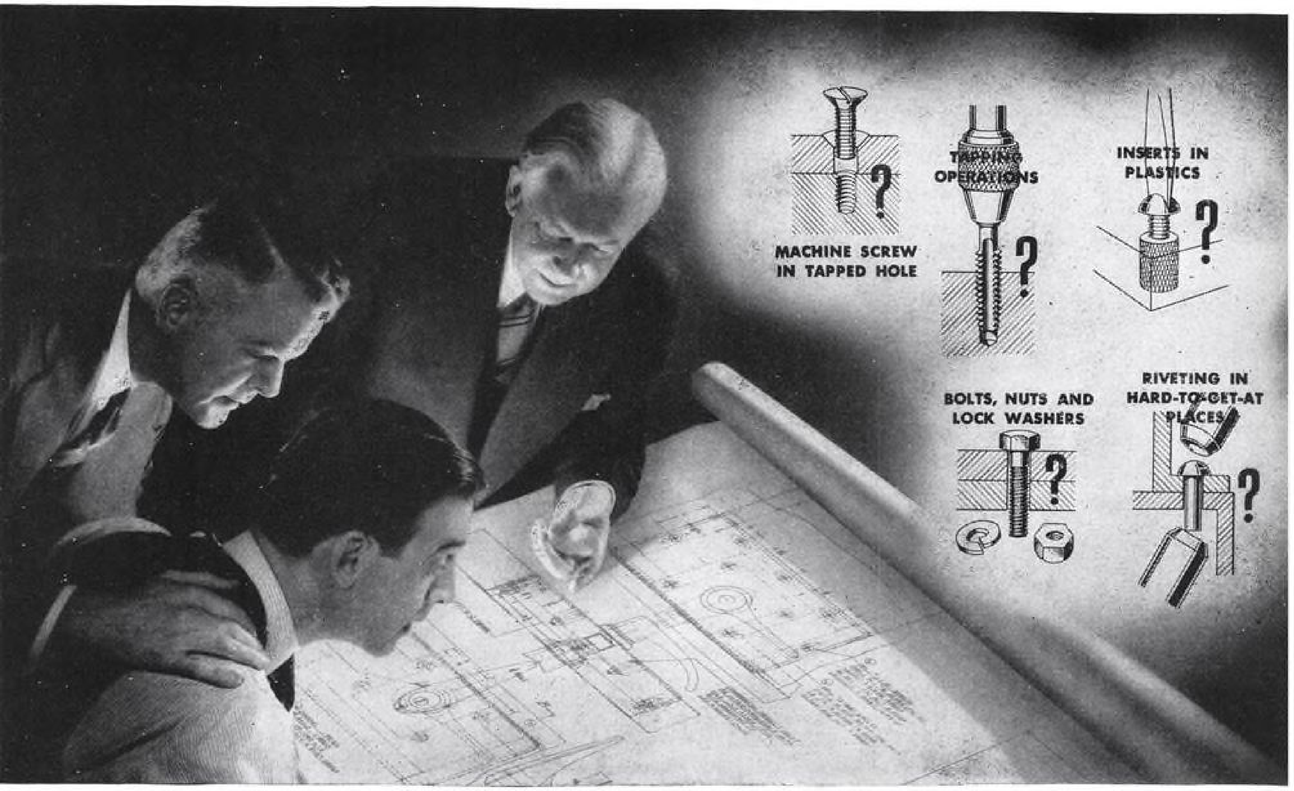

Wherever You Can Use P-K Self-tapping Screws You Can Save Time-Consuming Operations!

It has never been claimed that Parker-Kalon Self-tapping Screws offer the best means of making EVERY fastening under ALL conditions . . . BUT, it is a fact that, *for a very large percentage of metal and plastic fastening jobs, these famous screws offer a combination of ease, speed and security that no other fastening device or method can match!*

How P-K Self-tapping Screws Simplify Fastening Jobs . . .

One easy operation makes a fastening with P-K Self-tapping Screws . . . merely drive the Screws into plain untapped holes. Such simplicity eliminates tapping and tap maintenance . . . solves the problem of getting scarce taps . . . stops fumbling with bolts and nuts and placing of lock washers . . . does away with inserts in plastics . . . cuts out riveting and welding in hard-to-get-at places.

Start now . . . *question* every fastening! Be sure you can't employ the simple Self-tapping Screw method before you put up with a more difficult one.

Call in a P-K Assembly Engineer to check over fastening jobs with you. He can show you how to search out ALL opportunities to apply P-K Self-tapping Screws. And, he'll recommend them only when they will do the job better and faster. If you prefer, mail in assembly details for recommendations.

Change to Self-tapping Screws Over Night . . .

No matter what material you're working with . . . light or heavy steel, cast iron, aluminum, brass, plastics . . . you can adopt P-K Self-tapping Screws to advantage. And you can make the change-over without interrupting production. No special tools or skilled help are required. Parker-Kalon Corp., 192 Varick Street, New York, N. Y.

PARKER-KALON
Quality-Controlled
SELF-TAPPING SCREWS
Give the Green Light to War Assemblies

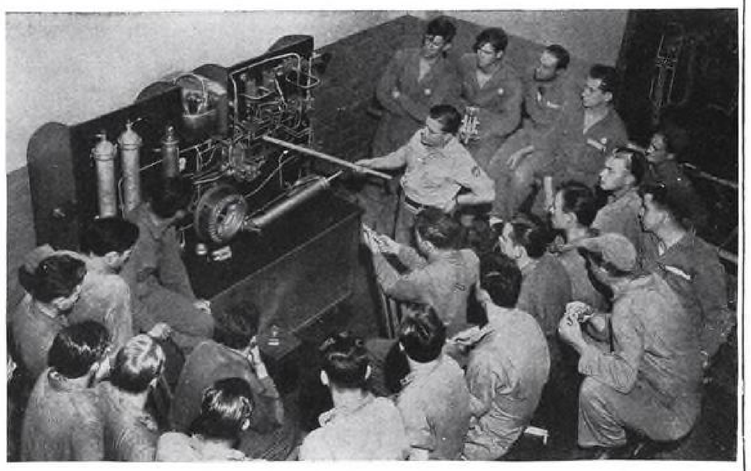

Field maintenance begins at the plant where North American experts train United States Army Air Forces ground crews to service and repair the planes it makes. In this photo a class is shown studying the hydraulic system of a B-25 "Mitchell" bomber.

(*Continued from page* 324)
and take special pride in keeping it in perfect condition.

The third phase of our field service embraces preparation and distribution of technical manuals. These are prepared and kept up to date for the field men from material developed as a result of the reports they send or bring in to the home office. As soon as a problem is encountered and its solution has been worked out, the data is prepared for the manuals and placed in the hands of those who will need it.

In addition to the men actively engaged in the service work, there is a group of men who see little of the airplanes in action, but who, through long hours of ceaseless effort, support those on the fronts—the men in the service office at the home plant. These are the men who study and analyze the field representatives' reports, find the answers to the problems thus uncovered, and get the results to the proper place, whether it be the drafting board, the production lines, or some point hitherto unheard of on the other side of an ocean.

Members of this latter group publish a weekly service newspaper the purpose of which is to keep service representatives informed of all design changes, new methods of repair, and all other information of value that is learned as a result of actual operational experience. Some prepare service bulletins, complete with drawings, which outline changes scheduled for the aircraft in service. Others compile records of service failures, reports on consumption of parts, and also process the shipment of service parts. And, finally, there are men who study and answer the almost countless letters and reports received from North American field representatives, from the Army Air Forces, and from military officials of those countries who together with the United States comprise the United Nations.

Heat-Treating

(*Continued from page* 173)

about a foot in length are quenched in a special rotating fixture and are carried through the quench automatically after handling. Parts which do not require special handling to prevent warpage are discharged directly into the quench when the hearth of the furnace is tilted. These furnaces, with all others used, are equipped with automatic thermostatic control for maintaining the temperature set with the particular part being handled. Parts which require cyaniding are handled through an Ajax salt bath furnace equipped with electrodes for heating. A water tank at one side and an oil tank at the other side of the furnace are arranged so that either may be used for quenching. Parts handled through this furnace are heated to about 1,500 deg. F.

Most parts which are hardened naturally have to be passed through draw furnaces of which six of the gas-heated Lindberg type are provided. Parts to be placed in these furnaces are put through a trichlorethylene degreaser after oil quenching and are loaded into trays and baskets handled by a one-ton overhead bridge crane. Products of combustion provide a reducing temperature and are continuously circulated through the baskets of parts. Drawing temperatures range from 300 to 1,200

A COMPLETE LINE OF AVIATION WIRE and CABLE by Wiry Joe

Wiry Joe, long a leading manufacturer of replacement wire and cable for the automotive industry, is also an important source of supply for electric wire and cable for the aviation industry.

The Wiry Joe "Aviation" line covers every need—starter cable, high-tension cable, primary cable—original or replacement. Wiry Joe also manufactures welding cable.

Every Wiry Joe "Aviation" cable is a quality cable, built to meet army and navy specifications, and produced under the Dostam Method of manufacture for high efficiency, long life, dependability and uniformity.

Inquiries concerning wire or cable for any type of service will be promptly answered.

Wiry Joe
AVIATION CABLE
manufactured by
THE CRESCENT COMPANY
Pawtucket, Rhode Island

Lighting Cable

Two-Conductor Cable

Ignition Cable

Starter Cable



Available in both shielded and unshielded constructions

HOLOPHANE

The Most Respected Name in Lighting — Since 1898

Under the pressure of emergencies and in the pinch of material shortages it is wise to remember that basic fundamentals as applied to lighting do *not* change . . . Control of light to provide proper visual conditions is as dependent on scientific planning today, as ever . . . And today, as ever, Holophane continues to operate on the principle that good lighting begins with good engineering . . .

TODAY—Wartime Performance . . . With 85% of all productive effort directly relying upon sight, the value of scientific lighting becomes a matter of national importance. It is significant that Holophane equipment is being installed in an ever-increasing number of important military, naval and ordnance projects.

YESTERDAY—Scientific Principles Tested . . . For more than two generations, Holophane engineers have contributed many major improvements in lighting technique. Mass production and intensive specialization brought the development of many new Holophane lighting units, each designed for its specific commercial, professional or technical usage. These units are serving efficiently, economically in every phase of our national life—in schools, factories and hospitals, on highways and airports . . .

TOMORROW—Research Based on Experience . . . Since the basic structural element of Holophane units is clear prismatic glass, their manufacture requires a minimum of critical materials. This fact, along with the constant research for new equipment promises an even more vital part, in the war program, for Holophane Planned Lighting. It saves materials, electric current and manpower. It converts waste into weapons. Its future is inalienably associated with the effort for victory.

We have contributed to and are cooperating with the War Production Fund to Conserve Manpower

Holophane Engineering Service offers, without charge, consultation and recommendations as to the safest, most effective, most economical illumination of your premises . . . Write for the latest Holophane Bulletin "Lighting for War Industry"

HOLOPHANE CO., INC.
342 MADISON AVENUE, NEW YORK
HOLOPHANE CO., LTD., 385 YONGE STREET, TORONTO, CANADA

deg. F. depending upon the parts treated. Time of drawing is also varied with the parts treated.

Cylinder liners are among the most important parts heat-treated. They are made from seamless steel tubing and, after undergoing rough machining, are given a stress release by heating for two hours at 1,200 deg. F. in the draw furnaces, after which they receive further machining before hardening, which takes place in 16 six-minute pushes through the whole cross furnace, during which they reach a temperature of 1,525 deg. F. before being quenched. After degreasing the liners are drawn at 900 deg. F. for two hours and are then cooled in air before they receive final machining.

Crankshafts, made from a special nitriding steel, are handled in a separate area of the department. After rough machining, the forgings undergo a stress relief during which they are heated in a special furnace for five hours at 1,100 deg. F. and then cooled in air. After further machining, within 0.020 in. of finished size, the crankshafts are given a second stress relief for the same time and at the same temperature. Then the shafts are ground and polished all over and the flange is nickel plated before nitriding takes place.

There are six Westinghouse nitriding furnaces, each capable of taking 20 crankshafts, which are carefully loaded in five tiers on a special rack along with a test piece cut from each forging. When ready for nitriding, bells to cover the charge are lowered and heating in an atmosphere of ammonia gas takes place. A temperature of 900 deg. F. is held for 65 hours after which the charge is cooled in the furnace to 250 deg. F., the total cycle requiring 84 hours.

Other large forgings besides the crankshaft are given hardness tests on 100 percent of the pieces, and the same applies to smaller forgings and to many carburized parts. Some 20 percent of other parts which have undergone heat-treatment are similarly tested. Rockwell tests are made on the smaller parts and Brinell tests on the larger ones. Before inspection, some parts are cleaned with cast iron or steel grits in a Wheelabrator, if any light scale or carbon deposits are in evidence. Parts which have been carburized have at least one piece from each bath ground and checked for thickness of case before the parts are unloaded and released by the carburizing department.

All aluminum cylinder heads and cylinder blocks are put through a furnace in which they are subjected to stress relief by heating for two hours at 350 deg. F. The Ross furnace is a continuous type fired with natural gas and

(*Turn to page* 331)

Infinite Positions

WITH NEW SELF-ADJUSTING PEC JIG CLAMPS

No other clamp is as flexible in its applications . . . in closed position, the clamping bar has infinite adjustment up to 15° below and above horizontal . . . yet you can't shake open the new PEC drop forged jig clamp. Because of the exclusive PEC self-adjusting feature (which operates like the slotted aperture on a pair of pliers) it is now possible to carry a much smaller stock, as one PEC is adjustable to do the work of many ordinary non-adjustable jig clamps.

Write today, outlining your requirements, and complete information on this new PEC jig clamp will be rushed to you.

SELF-ADJUSTING . . . QUICK-ACTING . . . INFINITE POSITIONS . . . DROP FORGED . . . POSITIVE LOCK

PEC AIRCRAFT TOOLS

Products Engineering Co.

LOS ANGELES, CALIFORNIA

against Vibration, Varying Pressures and Extreme Temperature Changes

WEATHERHEAD FLEXIBLE HOSE

BUILT to meet the toughest service demands, Weatherhead High, Medium, and Low Pressure Flexible Hydraulic Hose assemblies keep hydraulic forces flowing to vital mechanisms on every type of military and commercial plane.

Withstanding heat, cold, vibration, strain, and varying pulsations of pressure, Weatherhead assemblies are used for fuel lines, oil lines, instrument lines, and hydraulic applications of all kinds.

Prime contracts with the Army, Navy, Marines, and Coast Guard are evidence of the reliability of Weatherhead.

Other Weatherhead airplane accessories include Dural Tube and Pipe Fittings; Vacuum Selector and Check Valves; Hydraulic Check Valves; and Hydraulic Actuating Cylinders. All are manufactured to Air Corps, Navy, or "AN" specifications.

★ THE WEATHERHEAD CO., *Main Office:* Cleveland, Ohio ★
Branch Offices — Detroit, Los Angeles, New York, St. Louis

WEATHERHEAD

equipped with a conveyor. It requires practically no attention except for loading and unloading the castings. As the furnace is but 20 ft. in length, the conveyor moves about 10 ft. an hour and it is a very simple matter to load and unload castings from and to the wheel rack on which they are delivered.

World Cargo

(*Continued from page* 117)

maintenance facilities. In setting up a worldwide airline system, the vast distances involved when operating over such deserts have required that the planes be ready to operate in and out of airports which were often little more than stretches of sand.

We soon found that perhaps the greatest single aid to maintaining those airplanes was to provide, as quickly as possible, surfaced runways for landing, taxiing, and takeoff. It is obvious that in the operation of combat airplanes there is very little leeway for choosing airports as a matter of convenience—note the case of fighting planes in the African desert, which must be expected to operate from the floor of the desert itself.

The first part of the plane to suffer was the engines. Sand raised from the suction of the propellers, or boiling up from the landing gear on takeoff or landing, is thrown almost directly into the carburetor air intake. Before the development of carburetor air intake filters, it was not uncommon for an engine to be completely "ground out" by sand in the barrels and accessories within 25 hours of operation. Filters of two main types have been developed with ramming and non-ramming intakes. It is obvious that power loss must be expected when using a non-ramming type, drawing the intake air in from behind the engine cowling instead of receiving the full pressure of the forward air blast. However, the increased serviceability of the filters themselves has been found to justify the present inclination toward the use of non-ramming intake. This is particularly true in view of the fact that the air filter is usually only necessary on takeoffs and landings, and the length of run available is usually not critical in the desert. The sand problem lessens with altitude, at which point the intake of air for the carburetor is switched over to the usual inlet taking rammed air off the leading edge of the cowl.

Protection of the airplane on the ground is also of extreme importance to achieve the maximum service life. We quickly found that it is not safe to leave an airplane standing for even an expected short length of time, on such desert fields, without thoroughly cov-

ALLIED CONTROL COMPANY, INC.



AK HIGH-SPEED KEYING BREAK-IN RELAY



Completely balanced... arms equipped with anti-bounce features

Magnetically held in both positions..does not rely on back spring pressure

Insulation plates of high pressure Steatite

Mounting features with elastic stop nuts

Keys at 20 cycles per second

All terminals easily accessible

Contact rating 1,000 volts at 30,000 feet..20 megacycles ..4 pole double throw

Wattage consumption 5.5 in first position ..17.0 in second position

Withstands vibration to better than 20 G

Insulated to sustain 10,000 volts at sea level

Dimensions 2-7/16 x 3½ x 2¼

● AK a compact, high voltage, high speed, anti-vibration type keying relay for break-in operation in aircraft radio equipment. A push-pull magnetic arrangement which provides magnetic holding pressure on both transmit and receive contacts. One pole is equipped with two windings, one of which is a holding winding connected directly across the battery supply. The other winding is connected in series with the single winding on the other pole and polarized so that when the circuit is completed through the key, the flux is neutralized on the holding or receive position pole and the armature pulls up to the transmit position. Opening the key cuts off the bucking flux and the holding flux pulls armature back to receive position.

ALLIED CONTROL COMPANY, INC. ★ 227 FULTON ST., NEW YORK
Factories
NEW YORK CITY • LONG ISLAND CITY
CHICAGO • PLANTSVILLE, CONN.

REX-FLEX

Stainless Steel Flexible Tubing

SIMPLIFIES AIRCRAFT ASSEMBLY . . .
MAKES TOP PERFORMANCE DOUBLY SURE

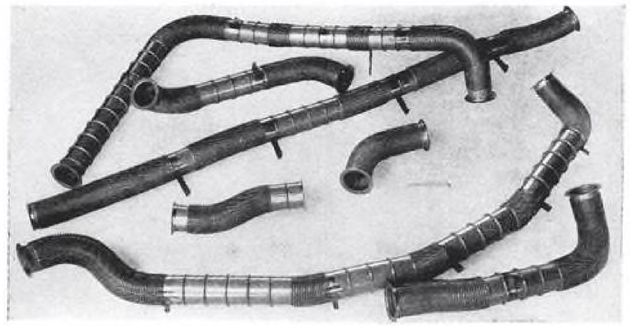

Units Shown are Typical Vari-formed Assemblies

Rex-Flex Stainless Steel Flexible Tubing combines the high fatigue value and the heat-and-corrosion-resistant qualities of stainless steel with extreme light weight and flexibility. Rex-Flex is bendable in multiple planes, available in long lengths, and can be "snaked" into place in cramped installations, eliminating joints. Simplifies and speeds up installation of air ducts, exhaust connections, blast tubes, heater ducts, power plant accessory parts.

Rex-Flex Stainless Steel Flexible Tubing is available in five wall-forms, all of which can be combined in a single one-piece length, with straight walls and corrugated sections at desired intervals. Sizes 5/16" I.D. to 5" I.D. inclusive. Made of 18-8 (Austenitic) Stainless Steel. Fittings are attached to tube ends by circular resistance seam welding. No flux, no name, no quenching—producing absolutely tight, homogeneous assemblies.

REX-FLEX is a production item originated to meet certain requirements of industry at peace. Fortunately REX-FLEX, as well as our older established Flexible Metal Hose products, have proved vitally important to our country at war. REX-FLEX is offered as a typical result of the engineering initiative and productive resource of this company. We welcome further tests of our ability to match our services to your needs.

CHICAGO METAL HOSE CORPORATION

General Offices: MAYWOOD, ILLINOIS
Factories: Maywood and Elgin, Ill.

ering openings which lead into the engines, as these wind storms are known to hit with only a few minutes notice. A crew may go in to lunch without pacing covers over the engines or over the carburetor air intakes, and return to find the sand blowing and inches of dust in the carburetors.

This also applies to engines having the new "short stack" exhaust outlets, where it is possible for sand to blow directly into the cylinder exhaust ports.

When there is the least likelihood that *sand* was on its way, Douglas found that the safest practice is to install engine covers (covering the propeller domes also and extending back over the exhaust outlets) and point the airplane into the wind.

Experience with a particular region of operation may also show that it is necessary to put on the canvas, cockpit and Plexiglas covers to avoid having the windshields thoroughly etched by the flying sand.

In spite of the protection applied, the maintenance crew can expect that after each "blow" it will be necessary to go back into the ship for a thorough cleaning. It can best be said that those desert sand storms *penetrate*.

As a result of the past experience, special provisions are now being incorporated to more fully protect hydraulic units from the intrusion of foreign matter.

Very soon, maintenance men can expect to see a round rubber or canvas "accordion" boot installed over the exposed surfaces of hydraulic shock-absorbing struts and actuating cylinder pistons. These serve the dual purpose of excluding dust from the interior of the hydraulic cylinder, contaminating the oil, and of preventing the abrasion and deterioration of the pistons and the packing themselves. It is well worth while for service personnel, under especially muddy or sandy operating conditions, to check these dust excluders and to patch up any holes that may result from flying rocks or rough handling.

On the C-54 transports, Douglas is now using an engine with the twin magnetos mounted on the nose section of the engine. From the service standpoint this represents a distinct improvement in accessibility, but it has also been necessary for the manufacturer to give particular thought to weatherproofing the magnetos. The increase of flying into driving tropical rains has necessitated particular care in sealing these units against moisture. Development of an "open-wire" electrical system for the aircraft itself is now being carried on. Elimination of the conduits now used to shield the fuselage and wing wiring will make this

(*Turn to page* 335)

RADIO SERVICE MAN OUT OF Cairo

Somewhere in Africa . . . or Iran, India, China . . . an American bomber returns to its base. Tomorrow, it will fly again . . . provided essential repairs are made tonight.

For this and numerous other such situations, BENDIX-RADIO Service Men are ever alert. Stationed at such centers as Cairo, Karachi and Kunming, within reach of advance bases of United Nations forces, these trained engineers are available at all times to render expert service.

Here on the home front, too, men and women of BENDIX-RADIO are doing their bit towards victory.

Products of BENDIX-RADIO are important members of "The Invisible Crew"... the precision instruments and equipment which 25 Bendix plants from Coast to Coast are speeding to our fighting crews on World Battle Fronts.

THE INVISIBLE CREW
Precision Equipment by Bendix
AVIATION CORPORATION

BENDIX RADIO — BENDIX RADIO DIVISION

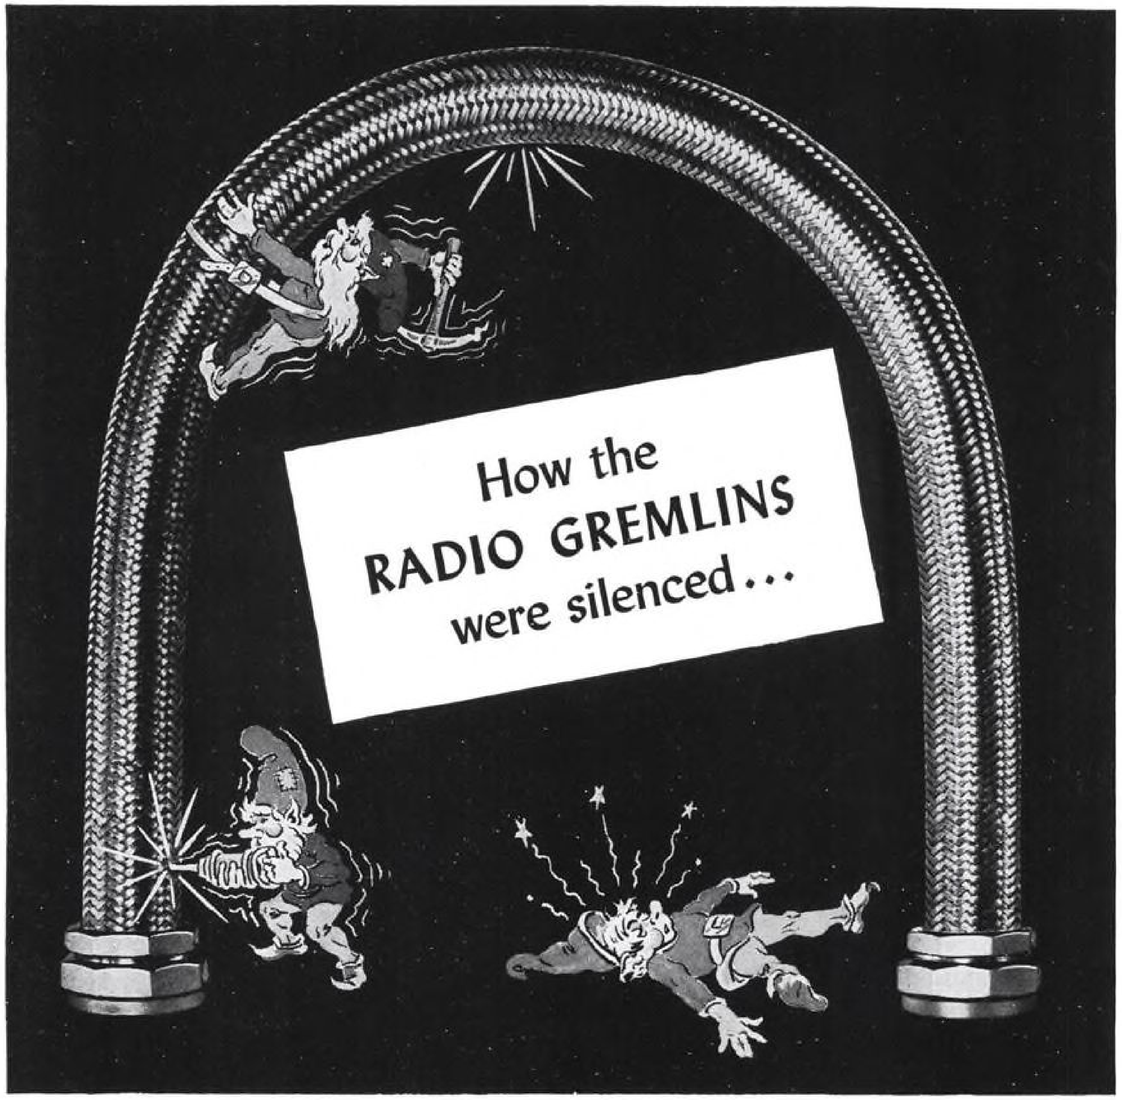

THESE insidious nonentities raise hob with pilots' nerves, chattering singsong misdirections, playing tag among the instruments, and generally making vicious nuisances of their mysterious selves.

One place they haven't been so successful with their mischief, however, is in the radio instruments, mainly because of Flexible Low-Tension Shielded Conduit that won't permit their sly whisperings and those distracting and interfering static-induced noises to get to the pilot's ears.

With the foolproof protection of Flexible Low-Tension Shielded Conduit, United Nations' flyers hear their radio signals and directions clearly, unfailingly.

* * *

American Metal Hose makes a complete line of fittings and accessories for American Flexible Low-Tension Shielded Conduit. Both fittings and conduit conform to A-N, A-C and NAF specifications. 42178

ANACONDA

American Metal Hose

AMERICAN METAL HOSE BRANCH OF THE AMERICAN BRASS COMPANY • General Offices: Waterbury, Conn.
Subsidiary of Anaconda Copper Mining Company • In Canada: ANACONDA AMERICAN BRASS LTD., *New Toronto, Ontario*

wiring much more accessible for the maintenance crews. However, some of the problems in connection with this open system change are not quite completed.

As we mentioned above, extremes of temperature are hard on rubber, and the heat and humidity of tropical operations definitely shorten the service life of rubber bungees. As a matter of fact, we found that the shipment, by boat, of spare bungees to distant tropical points where the boat ride might be a month or two, would deliver most of the bungees with half of their service life exhausted. We found that air shipment of such parts was justified to insure a reasonable life after installation on the planes awaiting them.

The comments made above regarding thermal expansion will also apply to units in tropical operation. It is to be expected that hydraulic fluid, locked in various parts of the system, will expand during the temperature change from the cool of the morning to the heat of the afternoon. It is necessary for maintenance men to check this occasionally, and if necessary relieve the pressure to avoid undue strain on dural lines or hydraulic hoses.

The effect of heat on Plexiglas surfaces is already quite well known from experience in southwestern United States desert bases. Under temperatures running to 170 deg., the expansion of Plexiglas in the larger panels causes it to bulge and take a permanent set. On some of the biggest panels, the Plexiglas may even sag inward again under its own weight, if not properly reinforced.

This condition can best be alleviated during maintenance by leaving enclosures open for ventilation within the airplane, so that the fuselage will not act as an oven with the hottest air along the top near the Plexiglas. In addition, it should be remembered that any dark cover, such as canvas, placed directly on the Plexiglas will greatly increase the heat absorption making the adjoining Plexiglas even hotter. Fortunately, the outdoor temperatures usually drop somewhat during a sandstorm.

Considering the sun temperatures which we have mentioned as common during the summer months, it is not difficult to visualize the physical problems which confront crews maintaining all-metal airplanes in tropic and subtropic zones. Imagine leaving a wrench out in the sun on the hottest summer day you can remember. Pick it up and burn your fingers, and you will understand what the skin of an airplane feels like anytime after eleven o'clock in the morning under those conditions.

At the present date, the scope of op-

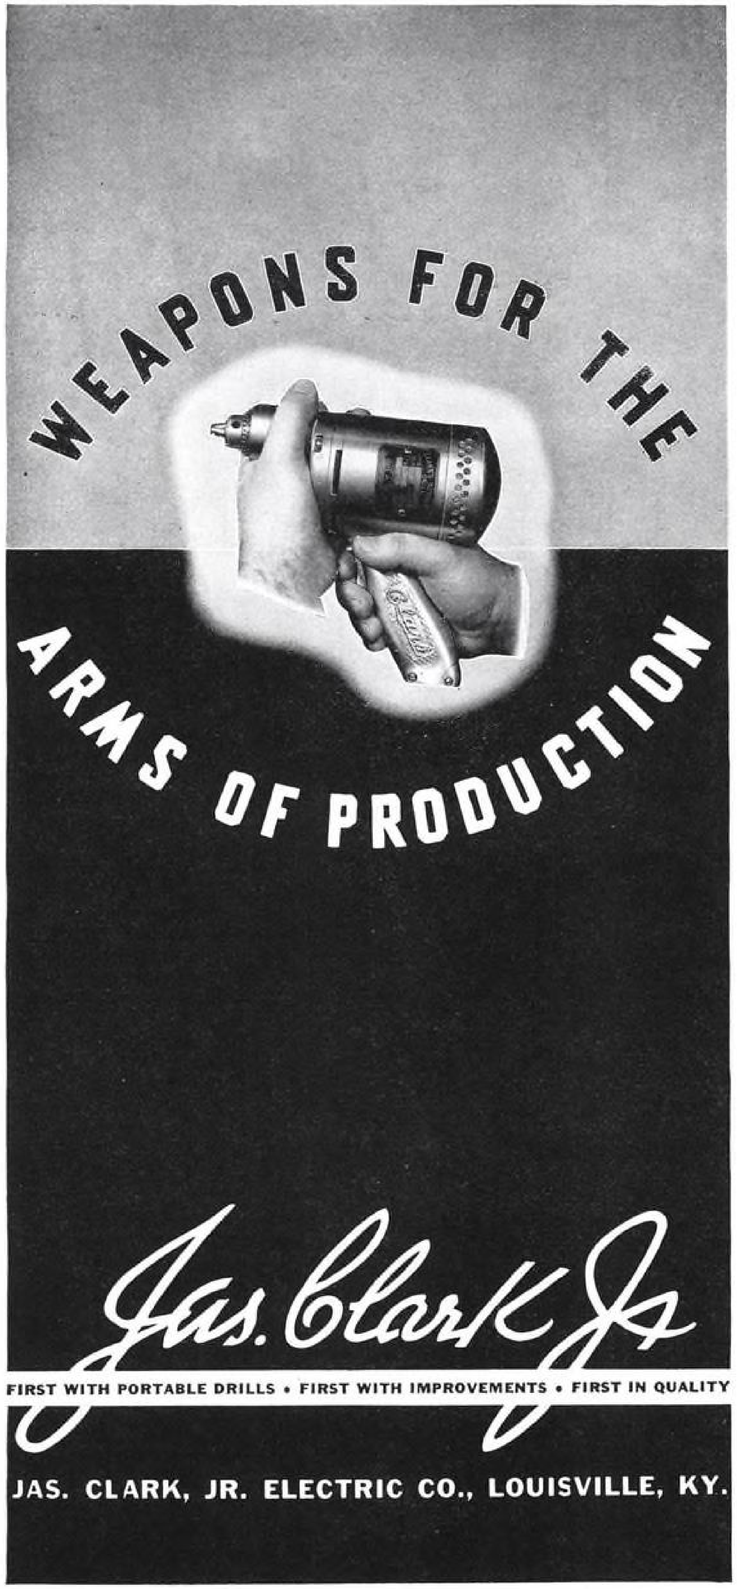

erations has also brought a maintenance problem in connection with airplanes which are likely to travel from one temperature extreme to the other within a few hours, or even minutes. Due to the flexibility of operating schedules between many outlying stations, an airplane normally operating in the heat of the North African desert may suddenly be sent or transferred to the snowclad Elburz mountains or Eritrean highlands. The maintenance crew will have to remember to provide against the effects of temperature changes already noted, checking such items as oleo and tire inflation and proper lubricants.

Another new problem to American maintenance crews has been caused by the increasing use of aromatic fuels. Many of the gasolines produced by foreign fields, particularly those of the Middle East and East Indies, contain aromatics to the extent of 10 to 40 percent. These aromatic hydrocarbons, necessary to bring up the octane rating of those fuels, tend to accelerate the deterioration of rubber and synthetic rubber parts of the fuel systems. Fortunately, almost all Douglas airplanes are now equipped with recently developed aromatic-resistant synthetic rubbers on parts likely to be affected by aromatics. At the present moment, it is still our practice, when using aromatic fuels, to check the condition of carburetor diaphragms at least every 60 days. In regions with hot climates, particular attention should be paid to the manufacturer's recommendation that "stale" gasoline not be allowed to stand in the carburetors for any length of time. High ambient temperatures will apparently tend to "distill" the fuel remaining in the metering chambers, and service life of neoprene diaphragms will be increased by occasional flushing of the fuel in those chambers, if the airplane and carburetor are to remain idle more than a day or so. In this connection, the carburetor manufacturers are developing, and will soon have out, new diaphragms of a synthetic which is satisfactorily aromatic resistant.

For the best economy of fuel consumption, horsepower output and engine rpm. are considerably lower on present long flights than has been the practice in normal domestic United States flight operation. We have found that vibration in our transport airplane is considerably increased when the engines are operated at around 1,400 rpm. or around 1,900 rpm. The difference in operating procedures between several of our customers has been found to have a definite effect on the service life of certain units subject to vibration. Naturally, this subject ties in directly with the loads, both cargo and

(*Turn to page* 339)

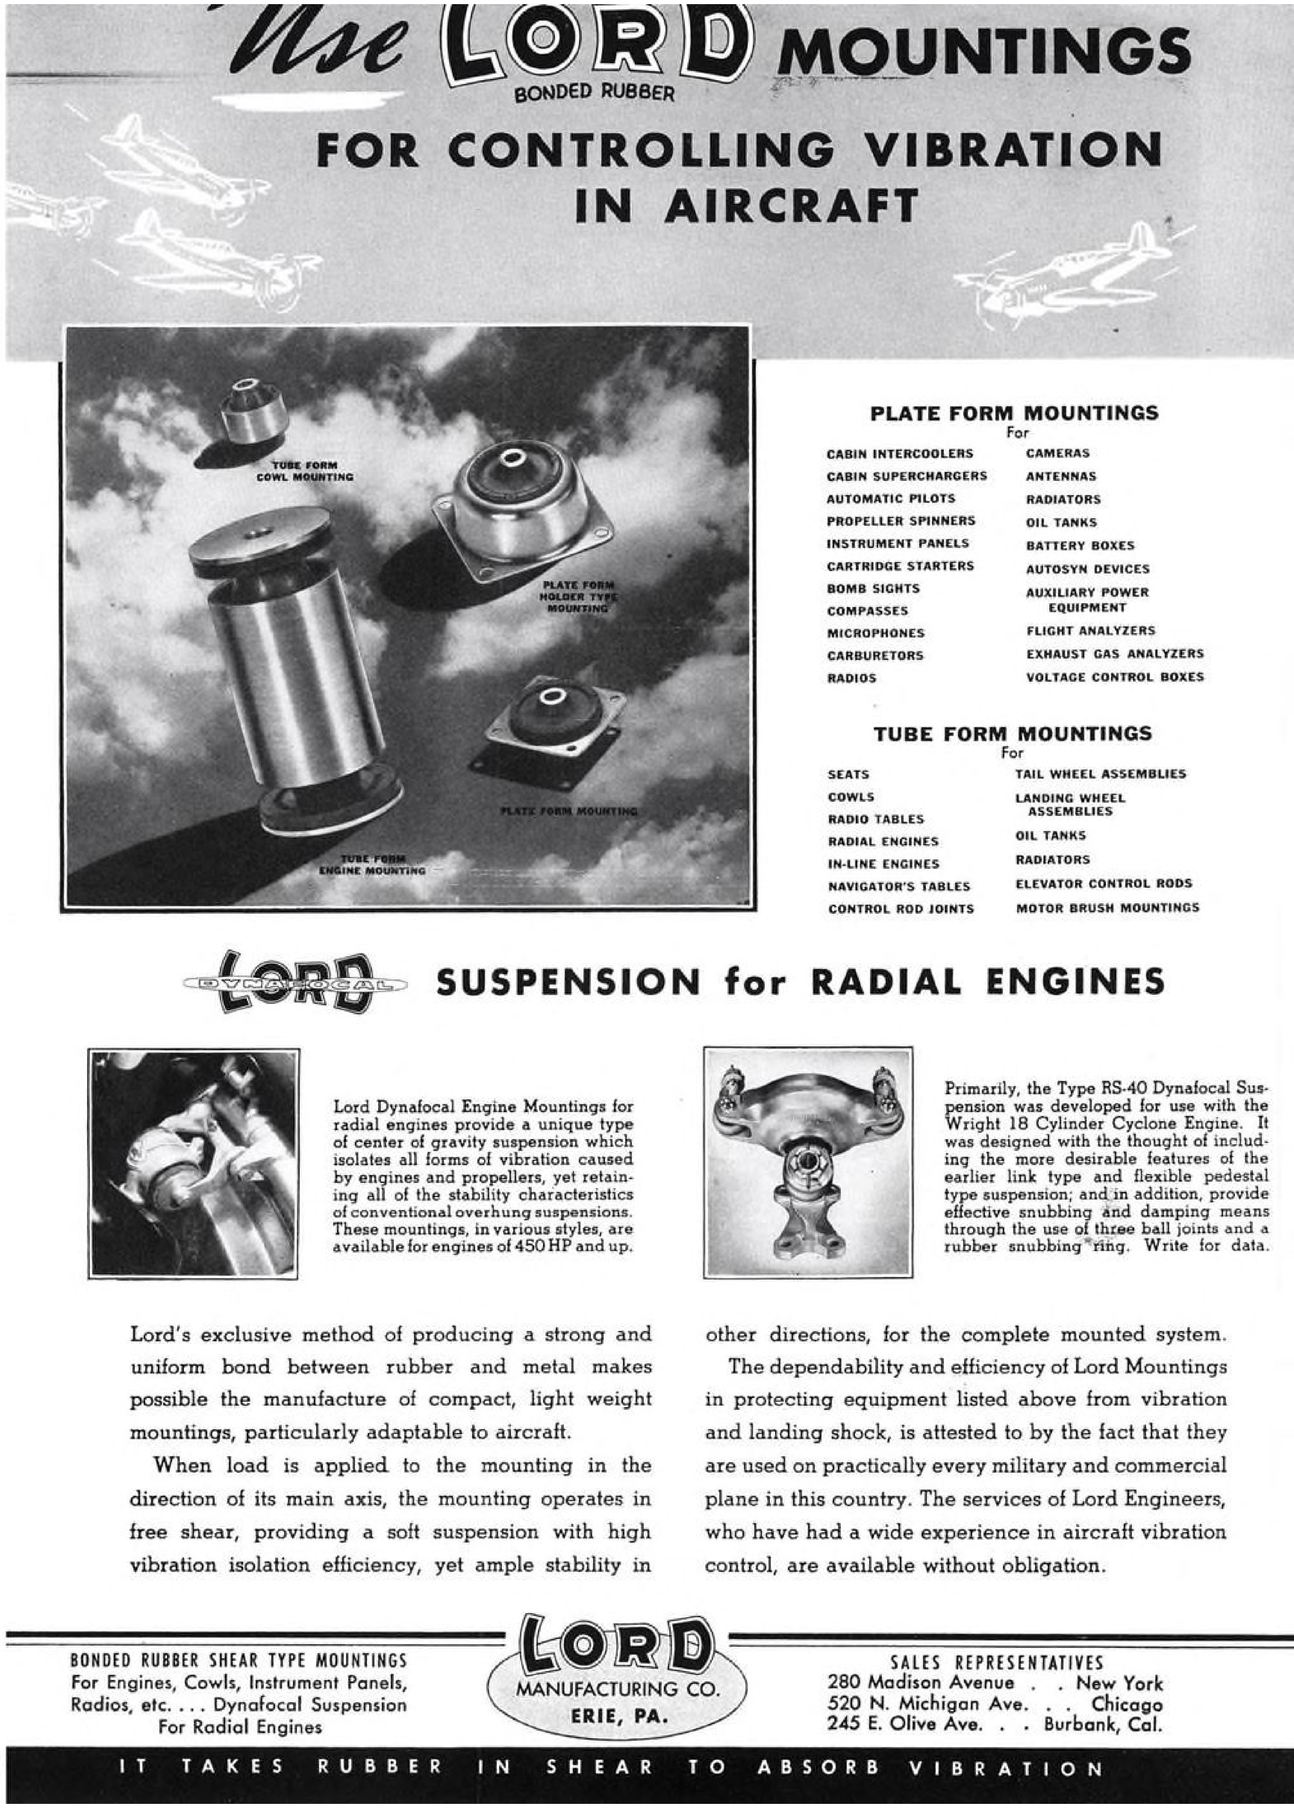

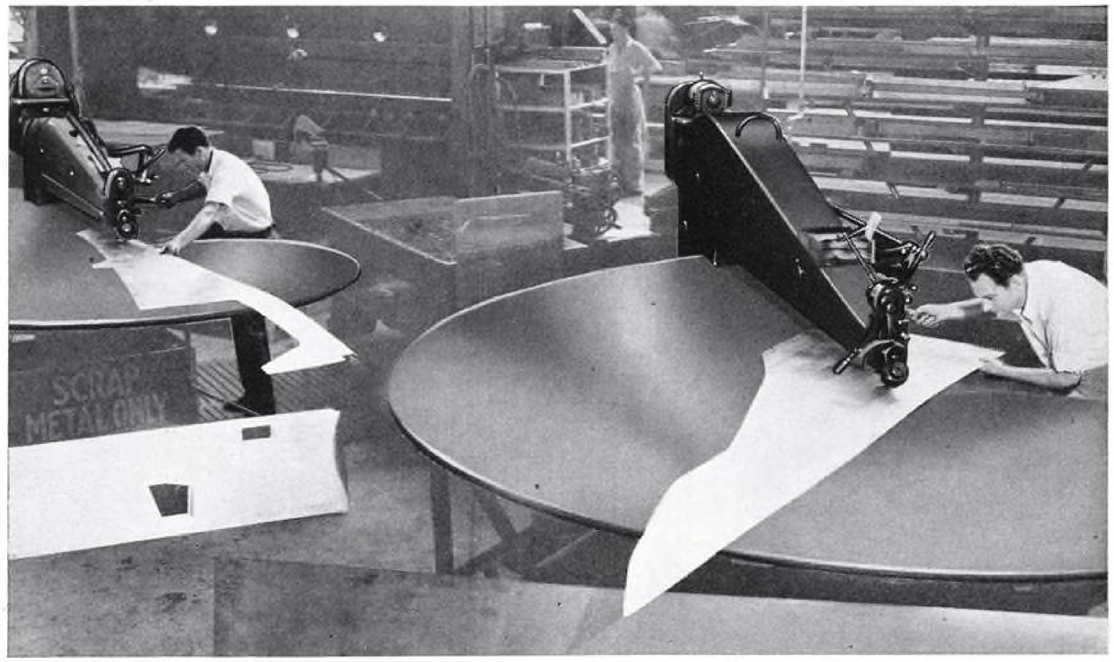

HOW TO CUT OUT AN AIRPLANE WING

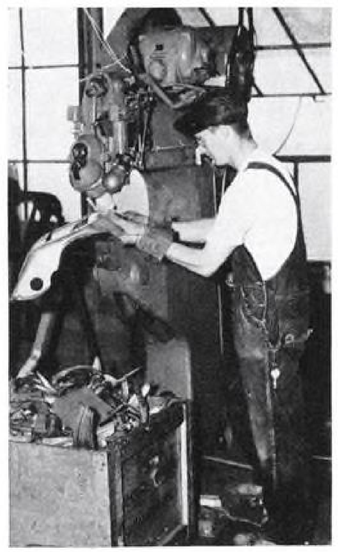

OR TRIM A STAMPING

Above: Cutting out wing section in an aircraft plant with the Quickwork. Below: Trimming airplane stampings is fast, accurate with Quickwork No. 8 Rotary Shear.

For accurate shearing of stainless or dural plate . . . for speeds up to 40 ft. or more per minute—use Quickwork-Whiting Rotary Shears. This versatile machine actually does the work of seven machines—saving space, time, labor. Operations include: cutting straight lines, narrow strips, circles, irregular shapes, flanging, and joggling. Available in 12 standard models . . . capacities up to 1" mild steel.

The Quickwork is widely used in the making of parts for airplanes. For information, write

"QUICKWORK"
WHITING

DIVISION OF WHITING CORPORATION, 15623 LATHROP AVE., HARVEY, ILL.

The Aviation Industry Is Served by Whiting Corporation with Cranes • Tools • and Matched Maintenance and Handling Equipment

aerodynamic, to which the airplanes are subjected. As a generalization, however, we have noticed that closer maintenance inspection is required, for instance, on the tail surface attaching fittings, if that particular airplane is operated at those low rpm. giving increased vibration. This item also has a considerable effect on units in the powerplant section, where failures of attaching brackets and fittings have been known to occur much earlier than should be expected, traceable to increased vibration by the use of unfavorable power and rpm. combinations. It is, therefore, questionable at times whether power output should be chosen to obtain the most economical fuel consumption, or should be increased somewhat to avoid undue maintenance costs, because of increased vibration.

We are sorry to say that we have noticed that one of the most neglected items, affecting the service life of transport airplanes being operated abroad, is proper attention to the cargo. Loading charts, as published in the past, have been more complicated than is desirable for easy use, and considerable effort has been put into providing this loading data in a simpler form. However, it is imperative that ground crews understand the basic limitations controlling cargo loading for the airplanes they are handling.

When limits for the fore and aft balance of an airplane expressed in percentages of the mean aerodynamic chord have been established, you have undoubtedly learned by experience that these limits can be exceeded to a certain degree without apparent danger. This has led to a bad practice of loading cargo in an airplane by sight. Assuming that the cargo "looks good," it is okay. Because of this, quite a few airplanes have gone through the fence instead of leaving the airport. Since the ground crew doesn't want to see their airplane left hanging on the fence at the end of the field, it is extremely important that they give careful consideration to how much of a load they are putting in an airplane, and to insure that the load is placed within the specified limits of CG location.

Maintenance men have found for instance that if an airplane is constantly loaded with the CG "just a little" aft of specification they are going to have a lot more trouble with stabilizer attaching fittings. The pilot can trim out the unbalance with 4 or 5 deg. of elevator tab, but that only means that the tail group is subjected to a preloading, shortening its service life, because the ground crew did not properly balance the cargo.

Long-range flights have also brought

A LIFESAVER for the aircraft mechanic

Note the switching device which automatically grounds the magneto when fittings are disconnected.

This dual magneto grounding plug guards the lives of the ground crew mechanics as they swarm over a plane during service and repair operations. Without such a safety device, any movement of the propeller might accidentally start the engine with tragic results.

With this Cannon Plug it is not necessary for anyone to remember to ground the magneto after the engine circuits have been disconnected for servicing. This is a typical example of how Cannon Plugs are used for a wide variety of applications in aircraft and other fields.

CANNON SERVES MANY INDUSTRIES

Cannon precision-type multi-contact connectors are made in countless shapes, sizes and styles, and are backed by twenty-seven years of electrical specialty manufacturing experience. They have become standard equipment in radio, television, aircraft, motion pictures and countless other fields.

CANNON ELECTRIC

Cannon Electric Development Company, Los Angeles, Calif.

Canadian Factory and Engineering Office: Cannon Electric Company, Limited, Toronto, Canada

4 TIME AND MONEY SAVERS for PLANE BUILDERS

1. TO ELIMINATE GRINDING OFF WELD SPATTER . . . *Acme Quality Industrial Finish Flash-Off No. 99.* Mechanic simply sprays, brushes, or wipes FLASH-OFF along edges of metal to be joined by weld. FLASH-OFF makes metal chips bounce off instead of adhering to areas adjacent to weld. FLASH-OFF also helps improve quality of weld. Being an excellent conductor, it helps prevent the weld arc from breaking, thereby producing stronger weld. It also prevents pitting of galvanized, ungalvanized, or "stainless" steel surfaces. Paint can be applied immediately after removing FLASH-OFF with damp rag. Low in cost. Comes in 55-gal. drums—and 5-gal. cans.

2. TO SIMPLIFY SCRIBING INSTRUCTIONS ON SHEET METAL . . . *Acme Quality Lay-Out Dye.* Semitransparent, extremely fast drying (about 1 minute), purple in color. Can be brushed, wiped, or sprayed on sheet metal. Work instructions scribed with sharp stylus or other sharp-pointed tool stand out bright and clear. When work has been completed, remaining LAY-OUT DYE can be washed off with denatured alcohol. Film is so thin that removal is unnecessary in many cases. Comes in quarts and gallons. Now widely used in many large plants.

3. FOR CLEANER THREADS AND SMOOTHER FORMING . . . *Acme Quality Tapping and Drawing Compound.* Better than lead and oil because TAPPING AND DRAWING COMPOUND *does not harden* on work, whereas lead and oil must be cleaned off immediately. It comes in paste form and is reduced to milky consistency with paraffine or other cutting oil for use in machines with circulating pumps. For sheet metal stamping, it is reduced to consistency of thin paint with any thin oil. Can be splashed, brushed, or sprayed on. Very economical—prevents accelerated wear on expensive broaches, and other cutting tools and dies.

4. FOR FULL-SIZED LAY-OUT WORK ON METAL SHEETS . . . *Acme Quality Velunite Draft Board White.* Widely used by airplanes, engines, parts, auto body and truck builders. Draft Board White is designed for 25% reduction with Acme Quality F-40 reducer. You spray on a "mist" coat of least possible film thickness. When dry, spray on full, double crossed coat. Allow to dry overnight. Does not become brittle with age nor chip under compass point.

ALL FOUR OF THESE MONEY SAVERS AVAILABLE THROUGH ACME BRANCHES LOCATED IN PRINCIPAL CITIES

Full details upon request. Address inquiries to

ACME WHITE LEAD & COLOR WORKS

Dept. F; Detroit, Michigan

increased attention to the navigator, consequently it has become necessary to insure that the navigator's turret is in the most accessible location and may be readily cleaned in flight. The navigator's turret has also provided a possibility for affording easy access to the top of large airplanes for the ground crew.

Also, in connection with present-day flights of greater length, it has become necessary for manufacturers and maintenance men to do their utmost to relieve crew fatigue. This includes attention to heating systems, seats, footrests, crew bunks, visibility and clean windshields, even ash trays. The neglect of any of these items will certainly contribute to reduction of the efficiency of the flight crew.

We should like to mention that too great an emphasis cannot be placed on the importance of the *condition* of the airports from which transport planes are to be operated. Although present planes have already shown themselves capable of operating in and out of the poorest fields, it is only natural that those planes will require far less maintenance if reasonable attention is first given to the airport. Combat airplanes obviously must be expected to operate under the most adverse conditions, with no recourse. Transport air bases, however, can enjoy the advantages of greater permanence and efficiency.

It's always well to remember that the maintenance of any airplane starts from the ground up, and the investment of time and effort in providing smooth runways, taxi strips, and engine run areas, will be amply repaid in reduction of the maintenance difficulties resulting.

Under present conditions, enough troubles are already encountered *training* maintenance personnel for air base work within the United States. When we realize that ground crews at foreign bases are absolutely on their own, it is plain that great care must be taken in choosing and training those crews if the airplanes are to receive proper attention under the adverse conditions to be expected. It is extremely necessary that men at these foreign stations be possessed of any unusually high degree of initiative. Tools and equipment at those bases are not yet as complete as we are accustomed to here, and it is imperative that field crews, headed for foreign service, plan to take with them all of the equipment that they can expect to need. In spite of the best planning allowable under the "forced draft" of today's pace, it is probable that some items will be overlooked.

However, it has now been our

(*Turn to page* 343)

Farquhar Self-Contained Hydraulic Presses are serving in Navy and private shipyards all over America—aiding in the production battle to get more ships "Down to the Sea."

Powerful hydraulic presses will continue to aid the "Ships for Victory" drive, by supplying quick means of shaping metal for aircraft, ships and tanks. Farquhar presses are built for all shipbuilding purposes from three to 7,200 ton capacities.

The hydraulic press shown is working continuously at the plant of the Electric Boat Company on bending and straightening operations. This press does a large variety of metal forming jobs ranging up to ½ inch thick steel for cold bends and up to 1¼ inch for heated jobs.

A. B. FARQUHAR CO., Limited

Hydraulic Press Division . . . York, Pennsylvania

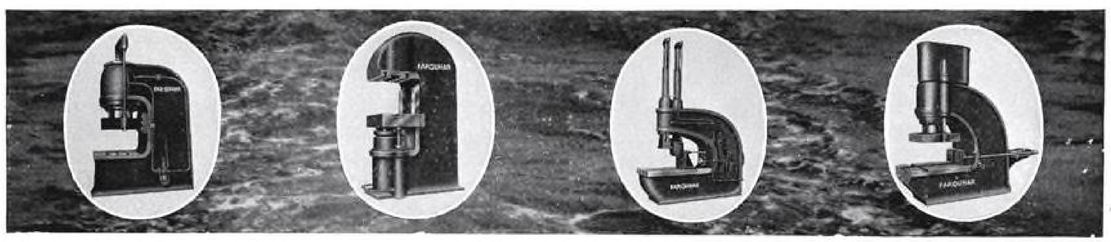

READY FOR DUTY

IN ARCTIC COLD— IN TROPIC HEAT!

Today — flying in all the world's climates — the Army Air Corps demands Radio Phones that will function perfectly everywhere . . . in the frigid air of the stratosphere — in the blazing heat of the desert. It's no easy task to build sensitive instruments for such a temperature range!

Murdock *Precision-Built* Radio Phones meet Army specifications. They are standard equipment with the Air Corps wherever it fights.

Serving the Cause of Victory

Murdock
RADIO PHONES

MURDOCK MANUFACTURING COMPANY — Chelsea, Mass.

pleasure to see how quickly American mechanics and field personnel have shown themselves capable of reverting to Yankee ingenuity in solving problems formerly nonexistant under the facilities available back in the United States.

The subject of spare parts for maintenance of airplanes abroad would certainly deserve a separate book in itself. We should like to mention here, however, that if we expect to "Keep 'Em Flying"—*Get the spares out to the crews who need them!* The comparatively wide variety of the models now being produced by this country has been the subject of considerable discussion. However, that variety requires that information on interchangeability of parts must be supplied to crews and stockrooms in the field. An air base handling several models of airplanes may not have available a needed replacement part of the particular part number for that airplane. An identical part, or one which may be used in its place, may exist under a different part number for this airplane. If these stockrooms are not informed regarding the allowable interchangeability of such parts carrying different numbers, it can be expected that replacements will be ordered from the main base or from the factory, when a part is already available which could have been used. On the other hand, without such information on interchangeability it is possible for field crews to substitute a part which "looks just like" the one desired but which should not be used, perhaps because its strength is less than that of the correct part, or perhaps because of some functional difference not easily seen.

Maintenance men will be glad to hear that Douglas and other manufacturers are placing increasing emphasis on the consideration that accessibility means serviceability. We certainly hope that improved installations of access openings are contributing to the easier and faster maintenance of our many airplanes.

The next few years will certainly see much more written into the record of "round the world" air transport. Today we are off to a flying start and the mutual efforts of maintenance men, pilots, and manufacturers, should do much to contribute to the final effectiveness of these United States' contribution to the far-flung United Nations Supply Line.

Womanpower

(*Continued from page* 127)

Mrs. Salley Delong, is doing drafting. All three are doing work, or preparing for it, that is almost identical with that done by their husbands. In our brief

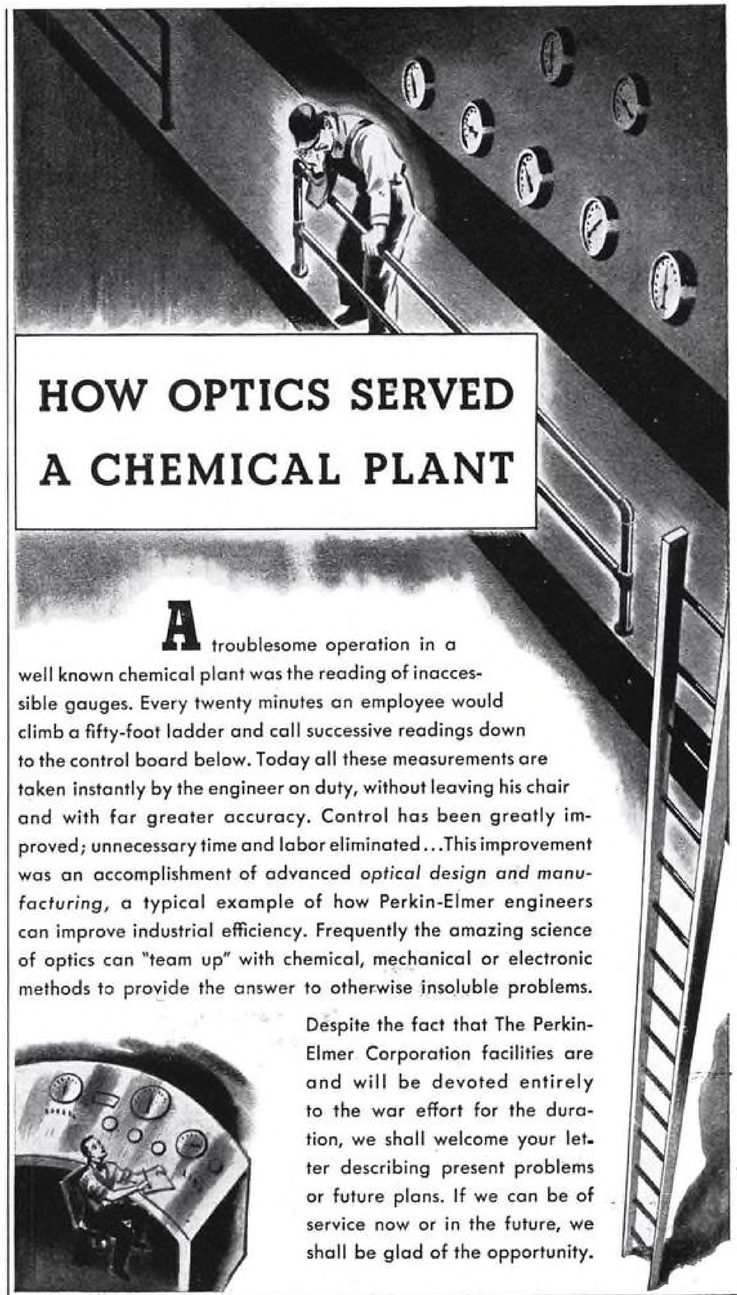

HOW OPTICS SERVED A CHEMICAL PLANT

A troublesome operation in a well known chemical plant was the reading of inaccessible gauges. Every twenty minutes an employee would climb a fifty-foot ladder and call successive readings down to the control board below. Today all these measurements are taken instantly by the engineer on duty, without leaving his chair and with far greater accuracy. Control has been greatly improved; unnecessary time and labor eliminated...This improvement was an accomplishment of advanced *optical design and manufacturing*, a typical example of how Perkin-Elmer engineers can improve industrial efficiency. Frequently the amazing science of optics can "team up" with chemical, mechanical or electronic methods to provide the answer to otherwise insoluble problems.

Despite the fact that The Perkin-Elmer Corporation facilities are and will be devoted entirely to the war effort for the duration, we shall welcome your letter describing present problems or future plans. If we can be of service now or in the future, we shall be glad of the opportunity.

THE PERKIN-ELMER CORPORATION
GLENBROOK, CONNECTICUT

MANUFACTURERS OF PRECISION LENSES • PRISMS and MIRRORS
OPTICAL DESIGN AND CONSULTATION

SEE HOW THESE APPROVED CHEMICALS & COMPOUNDS PERFECTED FOR AVIATION IMPROVE YOUR PRODUCTS

MacDermid's aviation chemicals and compounds are the result of over twenty years intensive research by MacDermid chemists and leading metallurgists in plane and engine factories for *faster acting, more efficient formulae individually compounded* for every metal and product processed by the industry.

PHOTO COURTESY OF AVIATION

Anodex

Improved *special* compounds perfected for Faster, More Efficient Cleaning of Steel.

Metex

Approved Aero Compounds

Designed for Fast and Positive Results in the finishing of Aluminum and Alloys.

WRITE TODAY

PERFECTED BY THE ORIGINATORS OF THE ANODEX REVERSE CURRENT PROCESS

MAC DERMID

INCORPORATED

WATERBURY, CONNECTICUT

Los Angeles · St. Louis · Toronto, Canada · Chicago · Newark · New York · Philadelphia · Cleveland · Detroit

SALES AND SERVICE FROM COAST TO COAST

experience with women we have discovered that most women prefer to do work similar to that done by their husbands, brothers or fathers.

Included in our current mechanics classes, of course, are many men, some of them recruited from the ranks of former garage mechanics, some older men, and many from other businesses but who have shown mechanical ability. In addition to actual shop work, they too attend classes where crew chiefs explain equipment, accessories, tools, techniques, and all other phases of the work they will do.

When the full story of this period can be told, it will not be merely one of unbelievable expansion of hours flown, tons hauled, or routes pioneered, but will also include a chapter on maintenance that will cover some of the toughest problems the airlines have had to solve. And not the least of these will be the replacement of manpower with womanpower in the shops.

Aircraft Maintenance War

(*Continued from page* 119)

a completely equipped repair and overhaul shop for the handling of 33 types of aircraft, plus accessories, engines, and propellers.

In three months time all equipment, materials, plus a personnel of several thousands, had been accumulated and shipped to the site of operations, and in another month preliminary operation had begun. The base is now handling production quantities of aircraft, engines, propellers, and all the varied accessories required to keep our aircraft flying. This miracle of organization and construction speed has been repeated around the world in the past year.

Maintenance bases generally fall into two classes: (1) Depot groups providing the smaller mobile type of overhaul, and (2) the large permanent supply depots. Because the developments of war are hardly predictable the depot groups must be completely flexible, ready for movement at any time. Since our armies now depend on our AAF for all major operations, and since the AAF must necessarily depend upon precise and reliable maintenance, the movement of maintenance equipment and parts is of the same key importance as any other line of supply serving our fighting operations.

Controlling the maintenance of our Army aircraft is the vast Air Service Command, which in 1941 was called the Maintenance Command. Now under the direction of Maj-Gen. W. H. Frank, the Air Service Command unquestionably has been assigned one of the most

(*Turn to page* 347)

Cecostampings

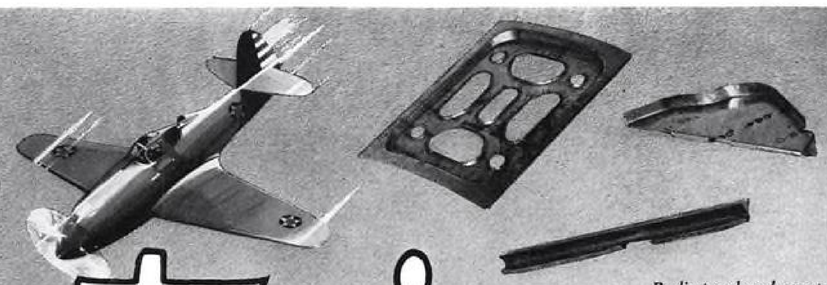

Radio panel and gussets made of aluminum alloy.

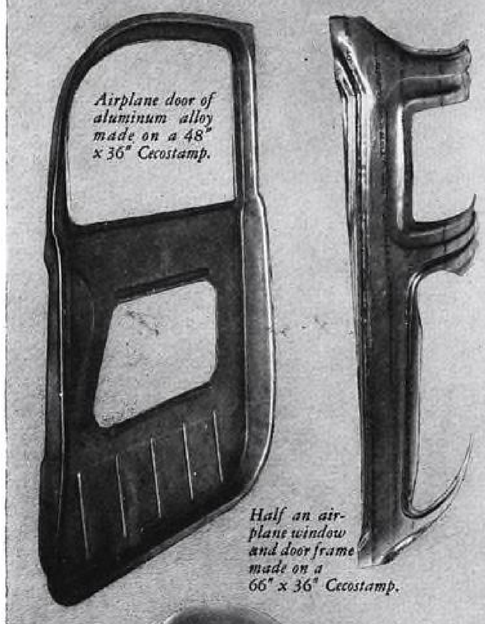

Airplane door of aluminum alloy made on a 48" x 36" Cecostamp.

Half an airplane window and door frame made on a 66" x 36" Cecostamp.

Cover

Airplane nose or spinner of stainless steel made on a 66" x 48" Cecostamp.

Unlike most other machinery being used in the war effort, the Cecostamp is something new in production machinery. An original design by Chambersburg Engineering Company, the Cecostamp is a high production impact type stamping machine for forming high strength sheet metal parts such as stainless steel and many aluminum alloys. By using a Cecostamp, it is possible to form difficult metals with greater true-to-die accuracy and fewer operations. The operator has control at all times of the metal flow of the stamping and is able, therefore, to produce desired shapes without drawing or a reduction in sectional areas. Controlled stamping overcomes the resiliency of hard-to-form metals while giving them a permanent set at a greater rate of production. A few examples of Cecostampings are shown.

For complete details of Cecostamping and more examples write for a copy of "Cecostampings."

CHAMBERSBURG ENGINEERING CO.
CHAMBERSBURG PENNA.

CECOSTAMP

The modern drop stamp for difficult forming of high strength steel and aluminum alloy sheet metal parts.

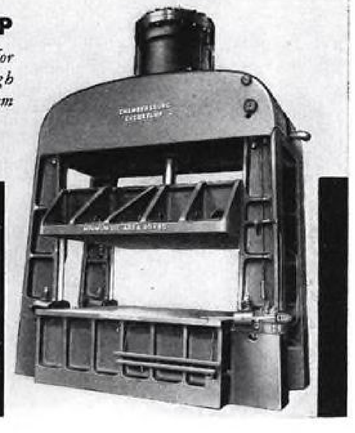

CHAMBERSBURG

CECOSTAMP

HAMMERS PRESSES

A B-24 LIBERATOR BLASTS ITS TARGET TO BITS

The big B-24 comes roaring in over the target, the "ack-ack" rocking it with near-hits. But straight and true it flies . . . drops its "eggs" and heads for home.

There must be no gamble when these Liberators take the air. As they roll off the production lines, Consolidated* fuels and lubricates B-24's (Liberators), PBY's (Catalinas) and its famous PB2Y's (Coronados) with Shell Products. Preference for Shell Aviation Fuels and AeroShell Oils carries from coast to coast among many plane and engine manufacturers, aviation training schools, transport lines and airports.

That's the reason airport operators the country over have found Shell's fast-growing line of products profitable to handle.

Consolidated fuels and lubricates its powerful bomber engines with

SHELL

Model of Liberator B-24 shown courtesy Consolidated Aircraft Corp. *Originator of the Liberator . . . Catalina . . . Coronado.

(*Continued from page 344*)

stupendous tasks of the entire war, not alone in maintenance but in supply of the necessary parts, materials, and machinery to those most remote corners of the earth where these aircraft are required to fight.

The Air Service Command headquarters is housed in a huge new building at Patterson Field. There, groups work to eliminate the troubles that occur to our aircraft, other groups are engaged in developing the most efficient types of tools for maintenance, still others attend to the big job of procurement and distribution of the great quantity of parts which must be delivered to each fighting base.

In addition, there are the depot groups controlling the operation of the great domestic supply and overhaul depots, also the United Nations group concerned with the supply of materials to all of the anti-Axis Allies.

A seemingly insurmountable task is being accomplished by this organization. Indeed, as the job becomes increasingly difficult because of more widespread operations and greater numbers of aircraft, the men responsible seem to analyze their problems even more calmly and more directly than before.

One of the tremendous problems is the acquisition of parts for all of the various engines, propellers, instruments, and thousands of other pieces of equipment which must be overhauled and maintained. The modern military airplane is a complex machine, to say the least. By no stretch of the imagination can it be expected to function indefinitely without replacement of worn parts, parts damaged by gun fire, or parts impaired in operation activity. This supply is as vital as any Air Service Command job, since the lack of almost any one of the small parts may ground a plane or cause its subsequent loss in combat. Responsibility of the men who must supply the parts to keep our aircraft in the air cannot be over emphasized.

Backbone of a military air service is comprised of the men who make up the squadrons. Similarly it may be said that the backbone of aircraft maintenance is gaged by the caliber of personnel responsible for such maintenance. At the beginning of the war, there were probably not more than 15,000 trained aircraft-and-engine mechanics in the United States. Task of training the hundreds of thousands required to maintain our planes was given to the Army Air Forces Technical Training Command, under supervision of Maj.-Gen. Weaver.

Recognizing, on our entry into the war, that those knowing most about our aircraft were the airplane makers, Gen. Weaver immediately called upon the manufacturers to set up schools to train several hundred Air Force mechanics monthly. At the time this directive was issued, Lockheed was in the fortunate position of having operated such a school for several years, consequently was able to swing into immediate action. This school is now training mechanics in the maintenance of B-17's, P-38's, A-28's and 29's (*Hudsons*), and B-34's (*Venturas*).

Experts conduct classes at plant, turn out tens of thousands of specialized mechanics for AAF. Here, instructor explains details of Fowler flap with graphic sketch.

What are you doing about PLASTICS ?

NOW is the time to learn about plastics—so you may take advantage of this industry's important new developments—so you can apply to your duties or products the *last word* in plastics. The Plastics Institute is already rendering a valuable service to far-sighted men—in the three activities listed below—send for full information on the phase that interests you most.

SPARE TIME TRAINING
For spare time education, the Basic Lesson Assignments bring you clear definitions of the different types of plastic materials. The machinery and methods of the plastics industry are clearly illustrated and described. Technical details are explained fully.

STUDY-FORUMS
The Plastics Institute conducts Study-Forums in many industrial centers for the convenience of men interested in more complete and practical training in plastics. Each Forum is conducted by a recognized authority. Write for address nearest Study-Forum.

RESIDENT COURSE
Designed for men who need a complete, comprehensive plastics education, including shop and laboratory training, the Plastics Institute offers a comprehensive Plastics Engineering Course. This one year course is available only at the Institute in Los Angeles—and classes are restricted.

Plastics INSTITUTE

176 South Alvarado Street, Los Angeles, Calif.
626-G La Salle-Wacker Bldg., Chicago, Ill.
1220-E Chanin Bldg., New York, N. Y.

Francis A. Gudger, *President* — John Delmonte, *Technical Director* — Dr. John P. Trickey, *Ass't Tech. Director*

ADVISORY BOARD
E. F. Laugee, *Chairman*
Donald Dew, *Diamolding Corporation* — Dr. Gordon M. Kline, *Nat'l Bureau of Standards*
Spencer E. Palmer, *Tennessee Eastman Corp.* — Louis M. Rassi, *Bakelite Corporation*

Member: Society Plastics Industry

In addition to the factory schools, Lockheed has built Technical Training Command mobile training units consisting of completely equipped trailers carrying mockups of all operating systems of the aircraft and designed to circulate from squadron to squadron for ten-day stands. These units are supplied with Lockheed and AAF instructors, and thus a great number of the problems arising in the operating squadrons may be attacked on the spot by reference to the Technical Training Unit.

Other schools have sprung up throughout the country for training of various classifications of maintenance mechanics, and the men attending them have been found both eager to learn and of high caliber. The supply of trained personnel required for maintaining our aircraft *is* being procured!

Now to that perplexing problem of transportation of required parts and technical personnel to distant bases across the seas: Here was a task of huge proportions—but it is being met very adequately by the Air Transport Command. As the Transport Command's fleet of aircraft grows, the problems of far-away maintenance diminish, because through the operation of these fleets of aircraft we are able to deliver to our fighting squadrons the parts, information, and personnel they so sorely need. Fact is that the Air Transport Command operates the greatest airline on earth, and it grows daily in size.

This prodigious operation has tapped the vital and excellent fund of experience available from the nation's airlines. We are indeed fortunate that our great airline system had progressed to such an advanced point prior to Dec. 7. This immediate wealth of experience has enabled our Army transport system to expand by leaps and bounds where otherwise a lengthy and costly period of training would have been required.

All of the foregoing endeavors are being welded into an integrated whole to keep our aircraft flying. A vital aircraft part to Australia. . . a trained technician to Cairo . . . a million gallons of fuel to England . . . or a set of aircraft jacks to South America! These calls typify some of the problems which flood the Air Service Command daily. Each problem must be dealt with individually, analytically. Each requires close cooperation and correlation of efforts of our various Army Air Forces Commands.

The fundamental maintenance problems of war are probably no greater than those which would confront us in peacetime if we were operating in the deserts of Libya, the weather-bound Aleutians, or the jungles of New Guinea. It's just that these problems are magnified to the nth degree by the requirement that they must all be done at the same time and that their strict execution is demanded by the compelling double-headed urgency of rapidity and accuracy.

Lockheed's overseas bases, the first of which was established more than two years ago, are affording our engineers a source of vital information which will enable us to build more durable, easier-to-maintain aircraft. This vast fund of experience cannot fail to aid us in making our fighting aircraft more formidable and reliable as new designs come from the factory.

Lockheed has placed field service representatives in every one of the United Nations where Lockheed aircraft are flying. These technicians are trained at the factory to contribute technical ability and knowledge which will help keep our aircraft in the air. As a matter of fact, these men will pitch in and help on any aircraft, regardless of manufacture.

At their West Coast factories, Lockheed and Vega conduct an experimental

(*Turn to page* 351)

An Engine Stand That Meets Every Requirement of Full-Speed, Full-Time Production

● Designed for use with interchangeable mounting plates for radial engines, this stand has an entirely enclosed gear drive and adjustable arm brackets which make it easy to obtain the center of gravity on a wide range of engines. Speeds inspection, servicing and overhauling. Equipped with friction floor stop, removable oil pan, steel ball bearing casters. Write or wire for descriptive literature on our complete line of stands for aeroplane and tank engines.

Staley MANUFACTURING CORPORATION

COLUMBUS, INDIANA, U. S. A.

POWER THAT HITS HARDER, FASTER, FARTHER—that's Diesel Power! And that is the power that America needs and is getting from the Guiberson Radial Diesel Engine to help the democracies out-pound the Axis. Guiberson Diesels for tank and aircraft use weigh less than 2 pounds per Horsepower.

POWER THAT IS SAFE AND DEPENDABLE—that's Diesel Power! More than 10 years ago the first A.T.C. certificate for a Diesel engine for airplane use was issued to Guiberson. The use of Diesel fuel eliminates fire hazard. There is no ignition system to cause sparks or to interfere with radio operation.

POWER THAT COSTS LESS AND GIVES MORE—that's Diesel Power! Giving 50% more power per gallon of fuel (and low cost fuel at that) as equivalent powered gasoline engines, Guiberson operation costs are extremely low. The flat torque curve of the Guiberson keeps maximum power flowing at all operating speeds.

5-6

AMERICA'S AIR-COOLED RADIAL DIESEL ENGINE

ESTABLISHED 1919 — NO SAFER THAN SORRY BETTER BE GUIBERSON

Guiberson U.S.A.

GUIBERSON DIESEL ENGINE COMPANY
Dallas, Texas

★ THE GUIBERSON CORPORATION
Aircraft and Heater Division

CONSOLIDATED CORONADO

Destruction must arrive on time!

THE luxury of a second guess is seldom afforded in battle. That's why on-time arrival of critical war materials must begin on the production lines and carry through to the attack. Men and women production fighters at **Rohr** are teamed up with the battle forces of the nation on every front where **Rohr-equipped** planes fly. Day and night, seven days a week, **Rohr** workers fight -- not to meet, but to ***beat*** production schedules . . . to help give America ***more*** planes ***faster.***

ROHR
AIRCRAFT
CORPORATION
PARTS ★ ASSEMBLIES
CHULA VISTA, CALIFORNIA

"-- it ain't the individual nor the army as a whole, but the everlastin' teamwork of every bloomin' soul"
Rudyard Kipling

HELPING TO WRITE THE STORY OF TOMORROW!

maintenance laboratory in the form of a service shop where repair and overhaul methods are developed to speed operation in the field, where new types of tools and jigs are built, and where the various other equipment required to service aircraft is developed and proven. It was here that the mobile training units were manufactured. The trained men who accompany these units in the field were another important product.

There you have the picture of the myriad, complex endeavors, each of which contributes, in its own way, to the maintenance of our aircraft. All of the Commands of our Army Air Forces and all of the manufacturers of our aircraft, engines and parts, *ad infinitum*, are working together—a great team to help our combat flyers "carry the ball." Surely such a determined mass effort assures the attainment of our ultimate goal—*Victory!*

Standards Committee Program

(*Continued from page* 165)

Standards Committees met in St. Louis and let down a lot of hair. There were many differences of opinion, for little or no reason, except perhaps that the several engineering organizations had never before tried to work together. There was a period of getting acquainted which illustrates very well the advantage of a permanent working group. Now that the representation is fairly fixed, with few personnel changes, the committee knows the intents and methods of the member companies, and the solutions are somewhat expedited. This advantage should be better understood.

The brief past of the committee is one of lifting by its own bootstraps. The industry is new, and the general concept of "standards" as something "frozen" in design has precluded much constructive standardization. Actually, a standard does not freeze or limit development of a design, but simply holds one part stable for a period while a new principle is developed in another. This is a major point for education which should be emphasized in every engineering class.

The present status of the committee shows a fair record of completed standards in a tough time. There are over 100 standards completed in over 20 subjects. These are available to all industries without cost, at the Office of the National Chairman, NASC, care of the Aeronautical Chamber of Commerce, Shoreham Building, Washington, D. C., in form for blueprinting. Present projects include dimensional standards for sheet, bar, tube, wire and structural shapes in both steel and dural; plain, loose and press fit bushings; acme screw threads; screw thread parts; self-aligning bearings; control rod and cable fittings; standards for surface roughness or machine finishes; low tension electrical cable; bonding; hydraulic fittings; electrical terminals; decimal methods for dimensioning drawings; high strength bolts and nuts; quick-disconnect fittings for pipe lines and cables, etc.

There are a number of Army, Navy and combined Army-Navy standards for parts and prefabricated materials as well as a fairly complete set of material specifications. Most of these are being periodically revised to keep up with the rapidly changing material situation, and in this there is an increasing liaison between the members of the Army-Navy Aeronautical Board, the NASC, the Aircraft Scheduling Unit of the War Production Board and the representatives of the ferrous and nonferrous raw material manufacturers. The dimensional standards recently completed will effect a simplification of design practice as well as manufacture and procurement. Interchangeability of raw materials between plants of prime and subcontractors is a major prob-

CALLED FOR ACTIVE DUTY ON THE PRODUCTION FRONT

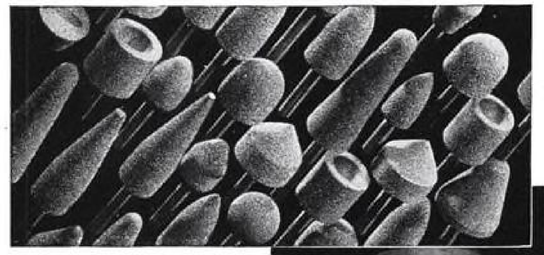

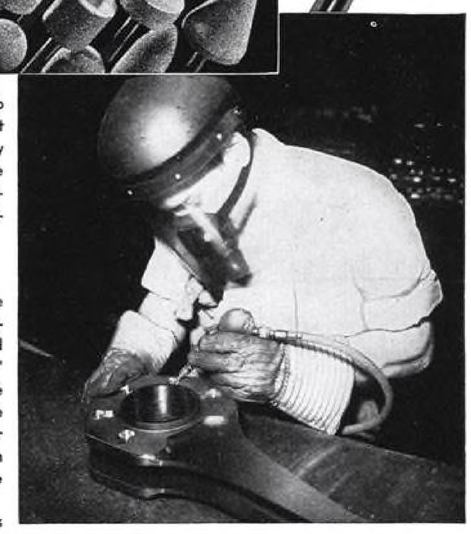

● We have a new job—to keep grinders going full blast all over the country in every war industry — in machine shops, tool rooms, experimental laboratories, repair departments, arsenals.

ATTENTION!

Our complete facilities are now devoted to making CHICAGO Mounted Wheels and Vitrified Grinding Wheels 3" and under in diameter. We're proud to be given this definite and important part in the War Program. Our work goes on night and day supplying these vital aids for Victory.

Send us your priority orders for mounted and unmounted grinding wheels up to and including 3" in diameter. You will get the right wheel for the job—when you want it.

We no longer manufacture the larger grinding wheels. We're sorry to have to disappoint our good customers (many of whom have been with us for half a century) on their orders for Vitrified Wheels over 3" in diameter.

Specializing on high production of Mounted Wheels, Cut-off Wheels and small Vitrified Grinding Wheels will be our job until the war is won. We know you will understand.

YOU SHOULD HAVE OUR NEW CATALOG—It shows in actual colors and exact sizes the most complete line of Mounted Wheels made. Send for copy today.

CHICAGO WHEEL & MFG. CO.
America's Headquarters for Mounted Wheels.
Established 1896
1101 W. Monroe St., Dept. AV,
CHICAGO ILLINOIS

AV-12
Please send new Chicago Mounted Wheel Catalog
Name .....
Address .....

lem, and here the standards are truly drastic.

This field alone, of simplified stocks of raw materials having been initiated by the NASC in anticipation of war government requirements will continue to be a major project of the NASC and will produce excellent handbooks of design data for sheet, bar, tubes, wire, rolled and extruded shapes not available now, but in process. These standards have been rapidly developed, requiring frequent revision, which is the best procedure for an industry in a period requiring so rapid change. The ferrous standards were sponsored by Eric Dudley, materials and standards engineer for Curtiss-Wright.

Incidentally, Mr. Dudley's excellent work on this project is largely responsible for his election at the November meeting to be national chairman of NASC for the year 1942-1943. His work is really just begun, for there will be many material changes before this war is won by our side.

The aluminum alloy standards were sponsored by C. T. Torresen of North American Aviation, California, who has completed a year as Western division chairman. Both of these projects required the compilation of the alloys and dimensions called for on the present and new design airplanes, individually by contractors, with the separate itemized amounts used as well as the location of the material in the airplanes. It was always necessary to show the WPB and the mill producers just where the material is now used in the airplanes, and why such is best suited. The omnipresent requirement for lowest design weight on an airplane permits little compromise with ill-advised reduction of choice of stock dimensions, but the number of stock sizes of material had to be reduced. For example, 2,700 alloys, diameters and wall thicknesses of aluminum alloy tubes were reduced to approximately 300, and others in similar proportion. Rolled or formed shapes from strip may be substituted for extruded shapes, the former produced from 50 to 100 times as fast as the latter.

Engineering departments are just beginning to develop the facility of intercompany design of subassembly parts such as tab controls, rudder pedals, pilots' control wheel, hydraulic cylinders, landing gear parts, throttle and other lever controls, pilot seats, and all such parts which each prime contractor must spend valuable time to design. These should be assigned to an NASC subcommittee to design for the whole industry. The majority are able to use such standards with little or no rework, and the more this is practiced the better will be the designs. The advantages are carried into every phase of manufacture, but especially to the field service depots in isolated places, which alone requires that the standards engineer should be a man of high position in his department. He must be able to discern good design, alert to the limits of the project, open minded to the opinion of others, a diplomat in committee and at home, and especially aware of the developments of other industries which may be adopted in his own. The work of a competent standards engineer will relieve the project and group engineers of much detail, permitting such men to devote an increasing amount of time to new principles and problems begging attention. The group designers may well demand that all non-confidential parts be developed by standards for all companies, in order to have the time for the newer problems. The parts and accessory manufacturers are literally begging for the chance to tool for large production of such items.

For the future, the field of the standards engineers, who are the NASC, and who thus represent their engineer-

(*Turn to page* 355)

RIVET WINGSPARS - SKINS - SUB-ASSEMBLIES

200% FASTER with ★ GENERAL ★ *Multiple* RIVETERS

★ General ★
Model GMHR

★ ★ General ★ Multiple Riveters squeeze-head aluminum alloy rivets at speeds impossible to attain by any other method.

They head from 4 to 32 aluminum alloy rivets per stroke depending on diameter of rivet.

★ ★ General ★ compensate automatically for changing stock thickness, thus eliminating a time-consuming set-up problem.

Unskilled operators can be trained in less than a day to operate ★ General ★ Riveters efficiently. Automatic controls largely eliminate the human element.

Write or wire for new catalog and complete information.

GENERAL ENGINEERING CO.
785 HERTEL AVE. BUFFALO, N.Y.

Coming in February

For wartime needs—the most important and most timely AVIATION Yearbook ... ever published

10th Annual Yearbook Number

AVIATION'S 1943 Yearbook

FACTS & FIGURES: PLANES, ENGINES, EQUIPMENT, PLANTS & PERSONNEL

$1 PER COPY

This year, as never before, *Aviation's Yearbook* of essential working information will be welcomed by the men responsible for our ever-increasing air supremacy.

In one big issue for quick, easy reference, *Aviation's 1943 Yearbook* will provide aeronautical executives with a comprehensive summary of significant, useful facts and figures . . . plane and engine specifications—research, design, engineering and production information—buying data—photographs and illustrations of the leading planes, engines and their design features—and *six* comprehensive directories of the important branches of aviation and their suppliers.

Keyed to war speed, *Aviation's Yearbook* is edited for those whose business is aviation . . . and doubly valuable to the thousands of newcomers to this fast-moving industry.

Index to the value of the *Yearbook* is last year's demand for more than 17,000 copies at $1—*over and above* regular mail distribution. Total distribution of the *1942 Yearbook* ran well over 50,000 copies.

Editorial Contents

1 **EXHIBIT OF U.S. AIRCRAFT**—A complete pictorial presentation of American civil, transport and declassified* military aircraft. Over 125 photographs with 3-view silhouette illustrations plus data on specifications, construction, performance and equipment.

2 **AIRCRAFT SPECIFICATIONS**—Detailed specifications of U.S. and foreign aircraft. Model numbers, power plants, performance, weights, dimensions and equipment . . . presented in easy-to-use tables.

3 **DIRECTORY OF ALL U.S. AIRCRAFT MANUFACTURERS**—Headquarters locations, key personnel and factory representatives of nearly 100 aircraft builders.

4 **EXHIBIT OF U.S. AIRCRAFT ENGINES**—Detail drawings and photographs of all important declassified* U.S.-manufactured power plants, with essential data.

5 **ENGINE SPECIFICATIONS**—Detailed specifications of U.S. aircraft engines giving model numbers, ratings, weights, dimensions and other important data.

6 **DIRECTORY OF ENGINE MANUFACTURERS**—Headquarters locations, key personnel and factory representatives of all U.S. aircraft engine manufacturers.

7 **DIRECTORY OF SUPPLIERS TO THE AVIATION INDUSTRY**—Headquarters locations and key personnel of more than 2000 of the leading subcontractors and suppliers of aircraft equipment, accessories, materials, supplies, tools and machinery.

8 **AVIATION'S SKETCHBOOK OF DESIGN DETAIL**—Greatly expanded in this issue. Perspective drawings and cutaway sketches of significant design features of leading U.S. and foreign aircraft.

9 **DIRECTORY OF AIRLINES**—Locations and key personnel of all U.S. airlines.

10 **DIRECTORY OF AVIATION SCHOOLS**—Locations, key personnel and courses offered by principal U.S. aeronautical schools.

11 **DIRECTORY OF AVIATION REPAIR STATIONS**—Locations and services offered by CAA-certified repair stations.

12 **AVIATION INDUSTRY FACTS**—Significant facts and figures on aviation progress and status of the industry today.

13 **EDITORIAL FEATURES**—Informative, up-to-the-minute articles on design, engineering, production, operation and maintenance.

14 **NEWS**—What's happening in the industry—in Washington—in aeronautical centers—and abroad.

**Declassified refers to that equipment on which the War and Navy Departments approve publication of information.*

Aviation's Yearbook is invaluable to . . .

MANAGEMENT EXECUTIVES—For its directories of manufacturers and buying data, its specifications and basic information, its progress reports, its news of aviation, both U.S. and foreign.

PRODUCTION EXECUTIVES—For its production information, its specification tables, its buying data.

DESIGN, RESEARCH AND ENGINEERING HEADS—For its design sketches of U.S. and foreign aircraft, its engineering data, research material, production studies, specifications and its directories of suppliers.

PURCHASING EXECUTIVES—For its wealth of information on sources of supply, in its directories and in its advertising pages.

ARMY AND NAVY OFFICERS, MILITARY AND GOVERNMENT OFFICIALS—For its comprehensive directories of plants, personnel and other buying data, for its specifications, for its objective analysis of the industry here and abroad.

AIRLINE AND AIRPORT EXECUTIVES AND FIXED BASE OPERATORS—For its significant information, facts and figures, its analysis of aviation trends, its U.S. and foreign news, its buying directories, its specification tables.

NOTE TO ADVERTISERS—RESERVE SPACE NOW—FORMS CLOSE JAN. 8th

SUPPLY LIMITED—RESERVE YOUR COPY TODAY!

AVIATION — 330 West 42nd St., New York, N. Y.

CHECK HERE ☐ Yes, I want a copy of AVIATION'S 1943 YEARBOOK. Enclosed is $1.00

CHECK HERE ☐ Please enter my subscription immediately to AVIATION at $3.00 per year, so that I'll get the AVIATION 1943 YEARBOOK issue in February. I understand that the YEARBOOK comes to me at no additional cost although it is priced at $1.00

Name .....

Street & Number .....

City & State .....

Company ..... Position .....

AY-1242

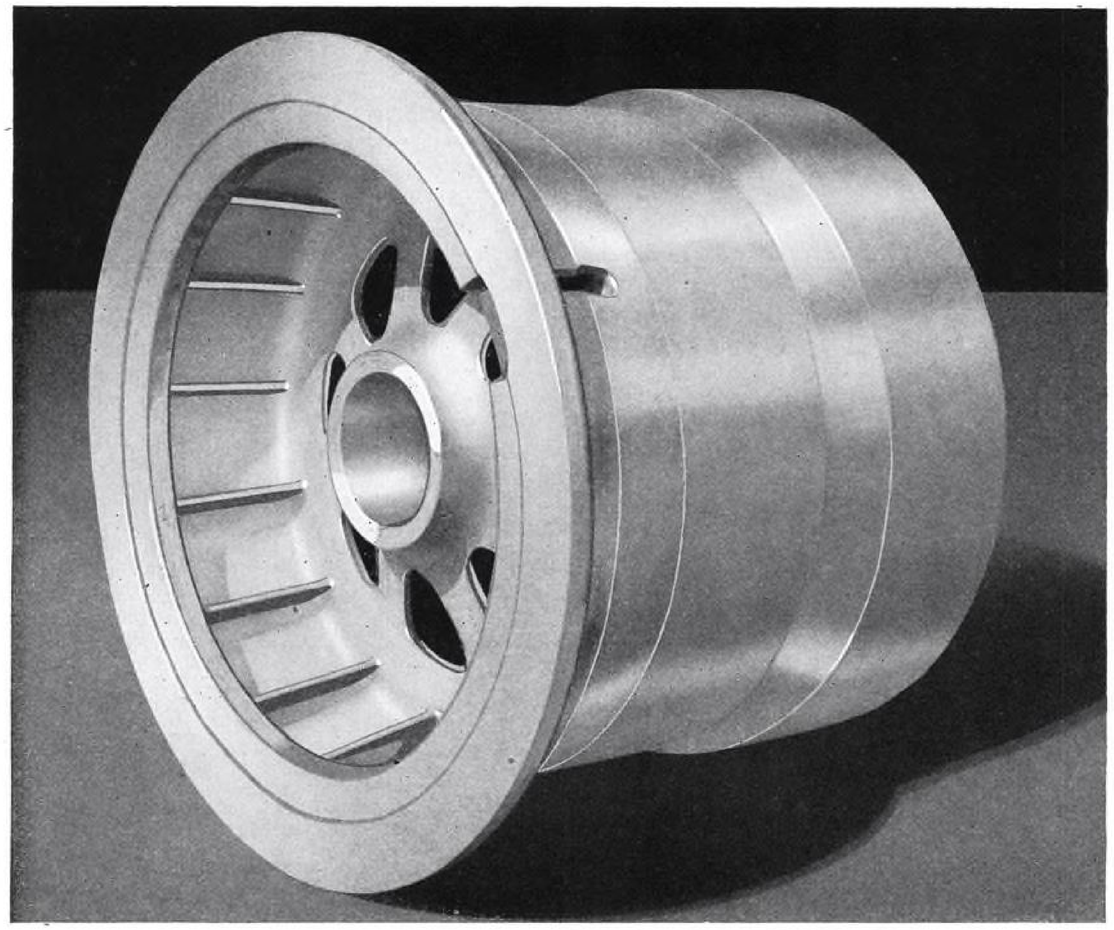

AIRPLANE WHEEL OF MAGNESIUM (Dowmetal)

BY *Wellman*

★ This magnesium casting—from a sand mold—although intricate, is smooth, clean and precise in every particular.

It is typical of thousands of other Wellman castings in other metals and alloys as well.

This is the result of an exceptionally well trained personnel—men who are accustomed to maintaining a fine degree of accuracy so that the castings may have that precision so essential in the aircraft field.

This expertness in casting is followed by thorough inspection—with X-ray. Here is the final test in which the X-ray is infallible and invaluable.

It is worth a lot to have quality—*and be sure of it.*

Castings in brass, bronze, heat treated aluminum and magnesium (Dowmetal). Patterns of all kinds, sizes and designs.

THE WELLMAN BRONZE & ALUMINUM CO.

General Offices, 2533 East 93rd St. Cleveland, Ohio

BREAK THAT BOTTLENECK WITH PHOTOMATIC

TRADE-MARK REG. U.S. PAT. OFF.

No need to delay employees because their identification photos won't be ready until "Tomorrow". *PHOTOMATIC* gets them ready TODAY — IMMEDIATELY!

Press a button and PHOTOMATIC snaps the photo, develops it, prints it, and delivers it complete in 40 seconds! 20 seconds more and the identification badge is ready. The Fastest and Cheapest identification method in the World!



PHOTOMATIC

THE FULLY AUTOMATIC PHOTOGRAPHING MACHINE

No Dark Rooms — No Messing Around With Loose Chemicals. Entire Equipment takes up approximately the same space as a telephone booth.

•

General Aircraft, Briggs Mfg., Edw. G. Budd Mfg., Chevrolet Gear & Axle, Hudson Motors, Long Construction, White Construction, Phillips Petroleum, Packard, Socony Vacuum, Miami Ship-building, and U. S. Engineering Corps. (Caribbean Div.) are a few of the users of this remarkable time and money saver!

•

WAR PLANTS WIRE FOR DETAILS

INTERNATIONAL MUTOSCOPE CORPORATION

Established 1895

44-13 11th St., Long Island City, New York

(*Continued from page* 352)

ing departments, is pregnant with possibility and responsibility. Given good standards for screw thread products, structural shapes with adequate stress data, more adequate bearings, methods for attachment for skin and structure, etc., with adequate sources of supply with reliable cost data, designers will be largely free of detail design with much more time for new problems, which is the proper work of the group designers and their leadmen.

This nation entered this war with almost no preparation for interchangeability, which requires highly skilled men. For example, Germany, already far advanced in the knowledge of economical interchangeable design, used 3 types of landing gear, compared with 27 in the United States. Early in the war, one contractor arranged with another to use the latter's main landing gear assembly. This assembly was designed and used on a medium bomber and was adopted by the second contractor to an airplane of different design and purpose. This is considered unusual in this country, but will be considered a blessing from heaven when the second airplane begins to reach the same advanced supply bases in actual combat. Project engineers may do much of this same thing, and thus do much to maintain more airplanes in the air rather than on the ground for lack of spares. When the days of peace come again, and the need to build for economy of manufacture and serviceability, especially in the foreign countries where we expect to send American airplanes, the work of today's standards engineer will be advantageous. Standardization belongs to no one period or condition of war or peace.

With respect to new design, the National Aircraft Standards Committee may become the heart of the Aircraft Engineering Society which we shall have, but do not have now in America. This society should include all of the Americas. By such organized liaison, a survey may be made quickly of the best shock-absorbing bearings for landing gear, means to rotate main landing gear wheels, control pedestals and accessories, flap and dive break mechanisms, gun slot closures, sleeping berths and air conditioning systems, and so on, as fast as new requirements develop.

The requirement of the project engineers for the new standards should bring out every process and method of manufacture which has advanced beyond the secret experimental stage. The willingness to share has been stimulated, and in our opinion will not be lost to the engineering departments represented on the National Aircraft Standards Committee.

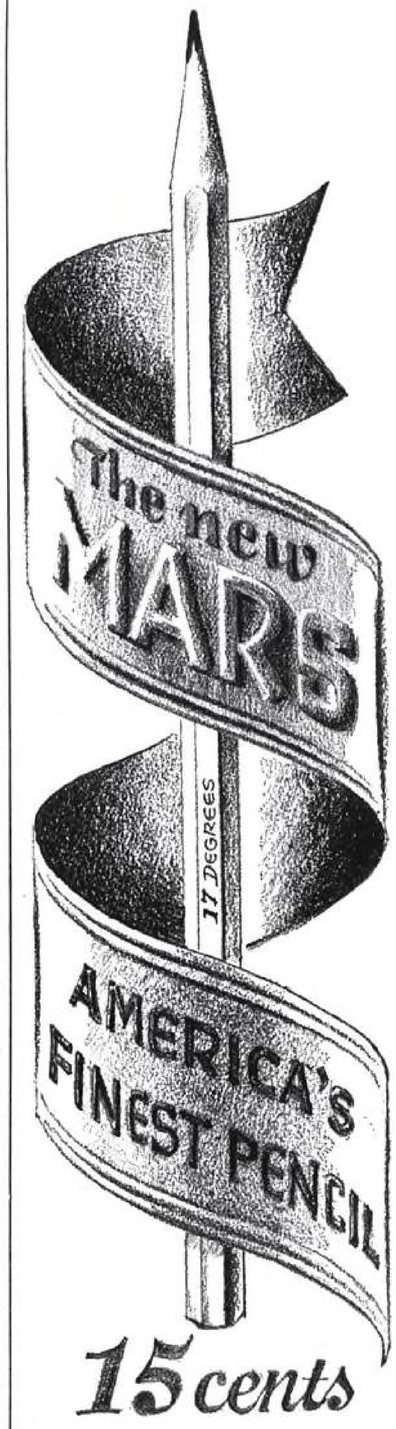

15 cents

J·S·STAEDTLER·INC·NEW YORK

NATIONAL DISTRIBUTORS:
KEUFFEL & ESSER CO.
NEW YORK

Securing Means for Air Cargo*

By COL. E. S. EVANS
President, Evans Products Co.

AIR TRANSPORTATION of freight is today a reality. Forty percent of all LCL shipments made by the Army is made in airplanes. I need not tell you that the major part of freight sent to such out-of-the-way places as Iceland and Alaska is moving by air. The transport from India to China, conveying supplies to Chungking, is moving larger quantities of freight than did the 4,550 trucks on the Burma Road. Just what is being carried to England by the bomber ferry is the Army's secret.

In spite of the above facts, there has been up until now no scientific method of shoring and stowing cargo in freight planes. This is not at all surprising because I can remember some 27 years ago, when I was carrying on a series of experiments which led to the adoption of scientific methods for the loading of automobiles, that automobile engineers would not even consider their loading problems. They were too engrossed in design and all of the difficulties of giving birth to that great industry.

When the matter was raised, I was referred to the loading foreman on the dock and these men each had their own individual ideas, none of which were based on scientific research, with the result that there were 18 distinct methods of loading automobiles in force in 1915. This held true for a number of years after that until, through constant urgings and some education, the automobile engineers commenced to take an interest in the car after it was built to see that it arrived safely at its ultimate destination.

It was in those early days that, carrying on a series of intensive scientific experiments, I laid the foundation for the adoption of loading methods for automobiles which has since that time reduced railroad damage claims $5 per automobile to 8 cents per automobile and which, in addition to about 300 million dollars saved the railroads, has saved the automobile companies and dealers another 300 million dollars.

The loading of various commodities of box cars is supposed to be regulated by rules published by the Association of American Railroads and sponsored by a Loading Rules Committee, but to an engineer some of these rules guarantee not safety to the cargo but damage to the cargo and show an astonishing lack of scientific knowledge of the problem which would, on the face of it, seem to be a simple one. As an illustration of what I mean, a load of linoleum was fastened in a box car with the Evans Utility Loader and arrived in perfect condition; a similar load made in accordance with the loading rules of the Association of American Railroads in which the cargo was fastened with band iron suffered considerable damage. Hot rolled band iron will stretch 15 per cent before it

(*Turn to page* 359)

* Paper presented at the Air Cargo Engineering Meeting sponsored by the Chicago Section of the Society of Automotive Engineers, with the cooperation of the SAE Aircraft Activity, the Air Transport Association of America and the Aeronautical Chamber of Commerce, Dec. 8, 1942.

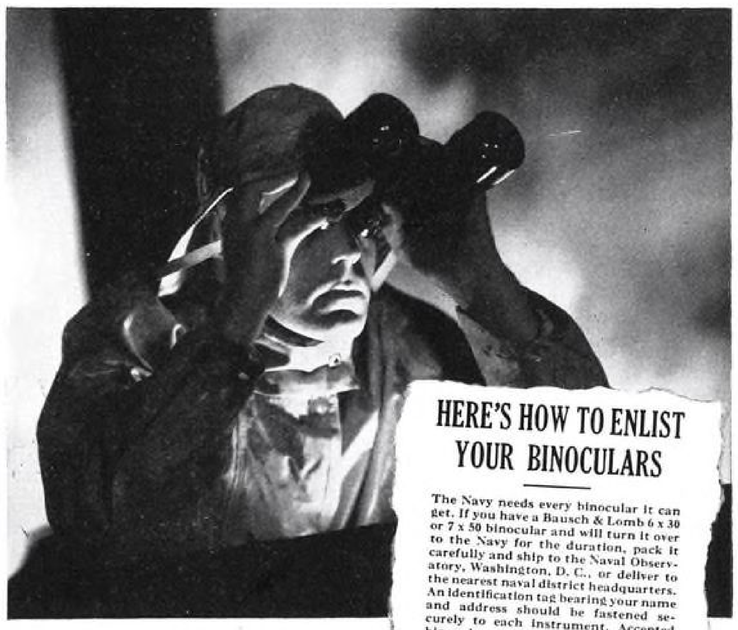

HERE'S HOW TO ENLIST YOUR BINOCULARS

The Navy needs every binocular it can get. If you have a Bausch & Lomb 6 x 30 or 7 x 50 binocular and will turn it over to the Navy for the duration, pack it carefully and ship to the Naval Observatory, Washington, D. C., or deliver to the nearest naval district headquarters. An identification tag bearing your name and address should be fastened securely to each instrument. Accepted binoculars will be acknowledged with a fee of one dollar and will be returned to you after the war if still in use.

The Navy is not authorized to accept gifts or free loans. Therefore, the binoculars are purchased for $1.00 and if they are available after the war they will be returned to the owner, in which case the $1.00 will constitute rental and appreciation charges. Commanding officers of naval vessels are requested to notify you of the ship aboard which your binoculars are in service.

They're in the Navy Now

ON the bridges and look-out stations of American ships, brave men stand alert, searching the horizon —on guard against enemy attack. You can help these men, and thus help to hasten the day of Victory, by sending them your binoculars for the duration.

Binoculars are among the many optical instruments of war that Bausch & Lomb is producing and helping others to produce. Today, even with a twenty-four hour day, and vastly expanded production program there is not room enough, nor time enough, to turn out all of the binoculars the Navy needs.

That is the problem you can solve —you and all the thousands of other owners of Bausch & Lomb 6 x 30 or 7 x 50 Binoculars. Your binoculars can help save American lives and American ships.

BAUSCH & LOMB
OPTICAL CO. EST. 1853

AN AMERICAN SCIENTIFIC INSTITUTION PRODUCING OPTICAL GLASS AND INSTRUMENTS FOR MILITARY USE, EDUCATION, RESEARCH, INDUSTRY AND EYESIGHT CORRECTION

WALKER-TURNER FLEXIBLE SHAFTING

...meets war's hardest tests!

In aircraft and other mechanical weapons — where requirements are unusually severe — Walker-Turner Flexible Shafting has thoroughly demonstrated exceptionally high quality of design and materials. As one of the largest manufacturers of flexible shafting for industry, Walker-Turner has gained wide experience in design, production and application of flexible shafting for remote control and power transmission.

Although it is one of the busiest departments of this Company, we are always glad to help other concerns who may wish to learn more regarding the possibility of simplifying design through the use of flexible shafting. Walker-Turner Flexible Shafting is available today in products used for war purposes, in a wide range of sizes and specifications.

WALKER-TURNER COMPANY, INC.
12122 Berckman Street Plainfield. N. J.

walker-turner COMPANY, INC. PLAINFIELD, N.J. U.S.A.

FLEXIBLE SHAFTING
FOR REMOTE CONTROL AND POWER TRANSMISSION

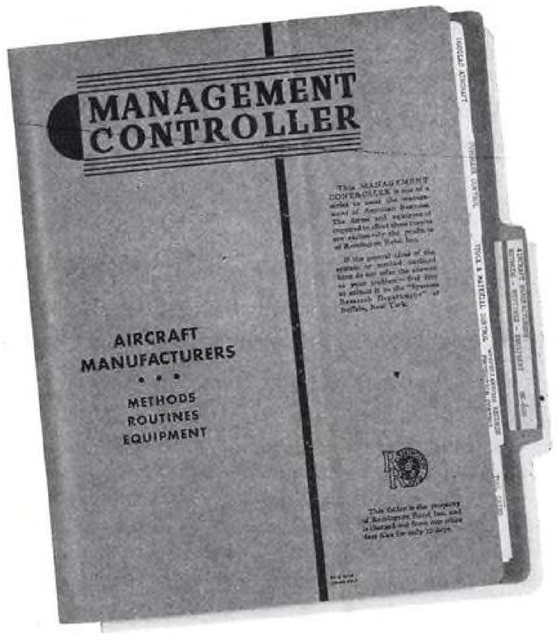

YOU MAY EXAMINE THIS MANUAL FREE OF CHARGE

★ This book is for aircraft manufacturers and sub-contractors who are seeking more effective methods for expediting production. It is not advertising "literature". It provides a thorough, clear cut analysis of the records, routines, and equipment employed today by more than thirty famous aircraft producers.

Seldom does there come to your desk a study such as this, presenting facts so pertinent to your immediate needs. In its 250 pages it describes systems that are applicable to *any* manufacturing enterprise. It covers personnel, procurement, material and tool crib control—as well as production methods. Originally prepared for the exclusive use of our own Methods Research staff, it is completely unbiased, completely factual.

Because of the confidential nature of much of its material, this manual can be delivered only to qualified aircraft executives and their staffs. It is offered on a loan basis only.

This is a free service and entails absolutely no obligation. A request on your letterhead—or a phone call to your nearest Remington Rand branch—will bring it promptly to your desk. Remington Rand Inc. Buffalo, N. Y. Offices everywhere.

AMONG THE AIRCRAFT USERS OF KARDEX PRODUCTION CONTROLS

ALLISON
BEECH AIRCRAFT
BELL AIRCRAFT
BELLANCA
BENDIX AVIATION
BOEING
BREWSTER AIRCRAFT
CESSNA AIRCRAFT
CONSOLIDATED
CONTINENTAL MOTOR
CURTISS-WRIGHT
DOUGLAS
FAIRCHILD
FLEETWINGS INC.
FORD MOTOR CO.
GOODYEAR AIRCRAFT
HAMILTON
LOCKHEED
GLENN L. MARTIN
NORTH AMERICAN
PRATT & WHITNEY
RYAN AERONAUTICAL
SOLAR AIRCRAFT
STINSON AIRCRAFT
VEGA AIRPLANE
VOUGHT-SIKORSKY
VULTEE AIRCRAFT
WACO AIRCRAFT
WRIGHT

Another Kardex Production "Expediter"
by **REMINGTON RAND INC.**

(*Continued from page* 356)

fractures. Therefore, a cargo stowed in one end of the freight car with band iron, each piece of which is about 20 ft. long, is susceptible of stretching about 3 ft.

I found in tests made with automobiles, in which we used three freight cars on the middle one of which we placed an automobile fastened to a dynamometer, that where the loading blocks were pressed tightly against the wheels we got entirely different results from where they were pulled back a half inch. Where the blocks were drawn back from the tires and the car shunted into other freight cars, the blow exerted on the blocks and on the dynamometer was four times as great as it was when the blocks were fitted snugly to the contour of the tires. Therefore, we were able to evolve certain principles in loading which later experiences developed to a point where they became the fixed formula.

For instance, we find that in freight cars practically all damage is caused by one of two things. Either vertical vibration which, at its extreme, is called harmonics, or longitudinal shock. This is only of interest to you because millions of dollars worth of airplane parts are shipped in freight cars and, whereas it has no direct bearing on airplane cargo loading, it is nevertheless important that we get a grasp of the broader problem before applying it to the specific question under discussion. Whether a load is made in a freight car, in a truck trailer, or in an airplane, there are certain basic rules which have to be followed. The prime rule is that there must be no slack in the load. If the load can move, immediately its own momentum will set up stresses and shocks which will enable it to break its moorings, shift center of gravity, and do many other dangerous and hazardous things.

In most instances, cargo carriers today in the air are converted passenger transports or bombers, and no provision of a permanent character has been made for cargo shipment. The very nature of the structure of an airplane is such that it is difficult to fasten heavy objects in such a way that they will not tear through the aluminum sheeting, and so the engineering of airplane loading offers difficulties that are foreign to loads in freight cars or truck trailers. However, where transports are originally designed and built for freight transport, this is no longer true. Strong, securely fastened loader parts can be incorporated into the design of the ship so that hold down members of various types can be attached without danger of injury to the hull of the ship itself, and individual commodities of considerable weight, such as airplane engines, reels of cable, large machine tools, etc., can be loaded with perfect safety and security.

The one thing that the loading engineer has to consider as the prime factor of airplanes is weight. In a box car we put equipment that weighs 9,000 lb. In a plane, carrying almost as large a load, the equipment will weigh less than 3 per cent of this amount, or a maximum of less than 300 lb.; and in such planes as are ferrying freight to Alaska, the loading materials used for fastening down a whole cargo is about 100 lb. Therefore, the greatest care in design to accomplish lightness and, at the same time, ample strength has to be employed. Materials must be used that will insure a tight and resilient fastening and that will not stretch under impact. It is not unusual for a down draft to be violent enough to lift the entire cargo so that it will exert an upward strain of 2 to 4/10 times its own weight. If the cargo is not held

PRESTITE
THE SAFE SKIN HOLDER

PRESTITE—Prestole's latest achievement in the aircraft field—skin holders that are both *safe* and *easy* to use in assembling aircraft skins.

PRESTITE fasteners will not only speed up production but their "Safety First" feature (note solid integral head which holds pin safely in position), will eliminate the danger of "letting go" and injuring workmen.

STANDARD FASTENER

Safe, durable, one-piece thrust pin construction guarantees hole alignment with straight thrust motion. Prestite Fasteners in actual use *longer* without the need for repairs.

NUT PLATE FASTENER

Prestites are doing an outstanding job in pre-locating nut plates. Their alignment feature centers the nut plate, and the holding pin is so formed as to prevent damages to threads or fibre inserts.

LONG THRUST FASTENER

This strong, sturdy, one-piece thrust pin and specially designed spring is made for unusual assembly conditions. Thousands of these long thrust fasteners are now in use and more are being developed.

"Featherweight SAFETY CHAMP" GUN

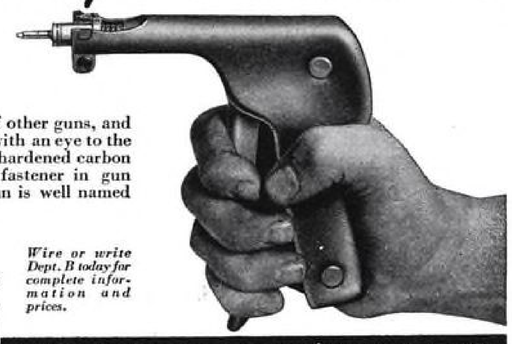

Almost *half* the weight of other guns, and designed to fit the hand, with an eye to the feminine users. Separate, hardened carbon steel holding ring locks fastener in gun during assembly. This gun is well named the "Safety Champ."

Wire or write Dept. B today for complete information and prices.

THE SAFE SKIN FASTENER

PRESTOLE DIVISION
DETROIT HARVESTER COMPANY
4501 DETROIT AVE. • TOLEDO, OHIO

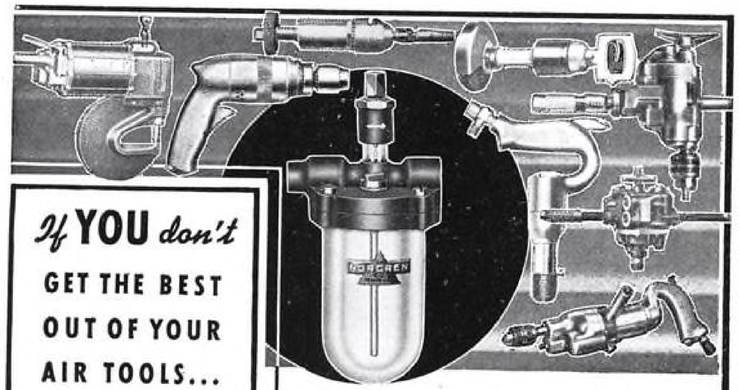

If **YOU** *don't*
GET THE BEST OUT OF YOUR AIR TOOLS...
WEAR WILL

With NORGREN LUBRICATION, you get the best possible performance from every air tool. 80,000 Norgren Lubricators used thruout industry prove that beyond question.

USE NORGREN LUBRICATORS

They lubricate every working part of every air tool by injecting *into the air stream* exactly enough oil to maintain a lubricating fog.

Automatic... works only when tool works. Sight feed... ends guesswork. Sweetens performance and speeds production. Sizes for every need.

Catalog 400 ○ ○ ○ **C. A. NORGREN CO.** DENVER COLO.

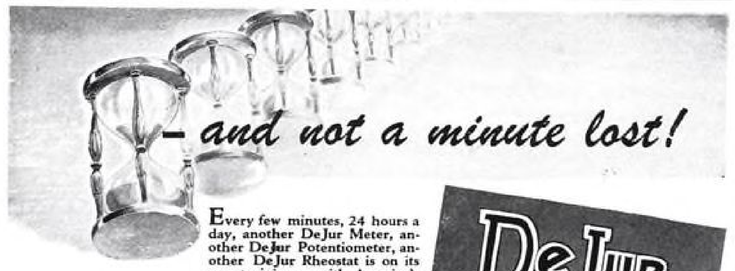

– and not a minute lost!

Every few minutes, 24 hours a day, another DeJur Meter, another DeJur Potentiometer, another DeJur Rheostat is on its way to join up with America's fighting forces on land and sea and in the air.

Here is as thrilling a story as any that American industry has recorded so far. A dramatic merger of men, mind and materials . . . an overnight swing from peacetime pursuits to wartime speed-up, and not a single minute lost . . . a transition from normal working habits in a small Connecticut town to never-ending production which is reflected wherever the flag flies. Out of all this—with your help and ours—will come final victory. Equally important, will come new developments, new discoveries that will far transcend anything in the past.

Write, wire or phone for New Catalog 1-61. Dept. G

DeJur Potentiometer ○ Type 270

DeJur Milliammeter Model 310

DeJUR
Precision
METERS · RHEOSTATS
POTENTIOMETERS

ELECTRICAL DeJUR INSTRUMENTS

DeJur-Amsco Corporation
Shelton, Connecticut

Manufacturers of Meters, Rheostats, Potentiometers and Other Precision Electrical Instruments

☆

BUY WAR BONDS & STAMPS!

securely and the plane should wobble, the whole cargo could be thrown off center and the center of gravity changed to such a point that the plane would crash.

Airplane efficiency can be greatly increased if proper loading is practiced. For instance, there are many objects that are shipped in airplanes today where the box weighs as much or more than the article it contains. Crates and boxes are often bulky and unnecessarily heavy. If proper loading materials are used, the weight and space occupied by heavy crates and boxes can be replaced with unboxed or very lightly boxed commodities and the payload greatly increased. Proper loading materials will accomplish this safely and quickly.

An excellent illustration of what I mean is a load of airplane engines shipped in box cars. I use this only as an illustration, but it will relate in a lesser degree to airplane engines and other parts shipped in air freight transports.

Until recently, the airplane engine manufacturers were purchasing heavy wooden crates weighing hundreds of lb. and costing $77 for the shipment of their engines. A box car load consisted of seven engines, and this box car only carried a payload one way, being shipped back with empty boxes which could be salvaged. A load made in an Evans Utility Loader, which is similar in its functions to the materials that we furnish for airplane cargo, took 14 engines and eliminated the cost of $77 per crate, the freight on 12,600 lb. of boxes, and the labor of boxing and unboxing the load at the two ends of the trip. The saving showed $1,176 per trip, and in view of the fact that it is expected that we will ship many thousands of engines a month in 1943, there would be a saving of approximately $2,525,000 a month which is now total waste.

The same general rules hold as true with air freight as they do with box car freight, and a study of the various loads now being made by you gentlemen will probably disclose many ways that the vital things shipped can be increased at the expense of unnecessary dunnage.

If you know that each part of the cargo will be held firmly and securely in place and will have no chance to bruise or injure itself by hammering or rubbing, you can safely lighten the packing and crating accordingly.

Most of the present devices have been designed to be used in converted planes built originally for some other purpose and, therefore, they are more or less make-shifts as compared to what the final holddown or loading device will be.

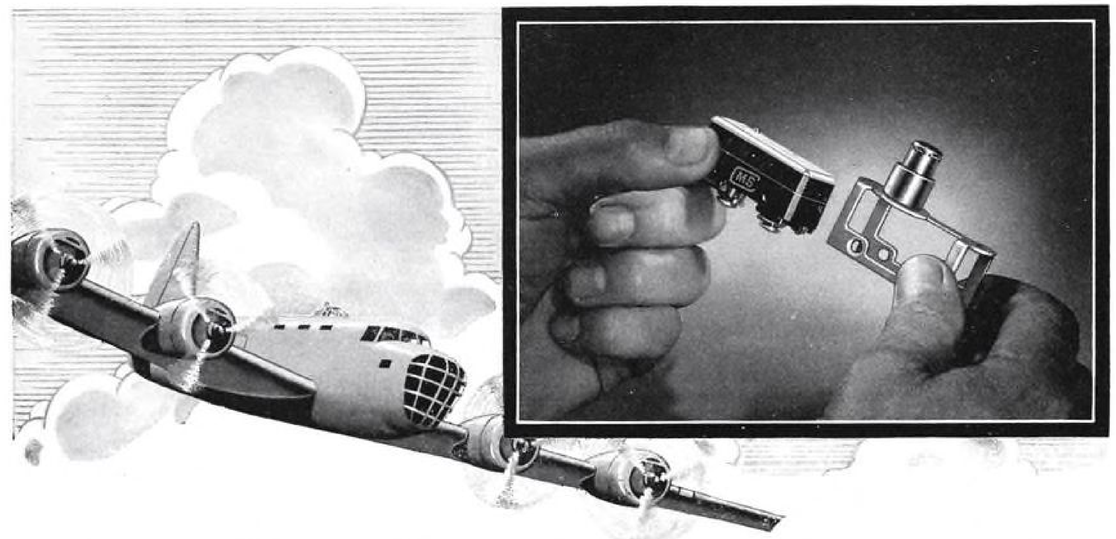

Four Good Reasons for Standardizing on These Micro Switch Actuator Brackets

Designed to Carry the Air Corps Approved Type R-31 Micro Switch . . .
For Complete Details of This Switch, Refer to Our Aircraft Catalog No. 70

These actuator brackets require no deviation permit as they are considered a part of the aircraft.

They are all specifically designed to accommodate the Type R-31 Aircraft Micro Switch.

Their use permits faster and easier installation of the Type R-31 Aircraft Micro Switch.

They make field replacement of Type R-31 Aircraft Micro Switch easy without disturbing bracket.

This new Type M-B skeleton bracket saves weight. It is complete with overtravel plunger and is interchangeable with Army switches A-1 and A-2. Weighs only .128 lb.; .02 lb. less than Army switches A-1 or A-2. The plunger on this bracket has a definitely controlled pre-travel and overtravel—a total of ¼". The Type R-31 Aircraft Micro Switch is sturdily supported in this skeletonized bracket by flush headed screws with lockwashers. The mounting holes in the top of the bracket are on standard 1 13/16" centers and accept No. 6-32 bolts.

The Type M series of panel mounting brackets offer three lengths of threaded stems for easy positioning by hex nuts and lockwashers. Switch operation takes place in the first 1/32" of plunger travel. Over-travel ¼" or 3/8" beyond the point of switch operation is provided. The Type R-31 Aircraft Micro Switch is carried on two thru-bolts as shown in the illustrations.



The Type T series bracket has met instant adoption as a throttle warning switch, singly or in gangs. They are operated by cams on the throttle quadrant or dogs on the cables. Any switch held depressed can be instantly opened by the manual release without disturbing others in the gang. As a general use limit switch the Type T bracket without the release is a sturdy mount and actuator for Type R-31 Aircraft Micro Switch. Two thru-bolts make replacement easy.

The Type H series of aluminum housings, one of which is illustrated here, are complete with a plunger actuator which can be sealed against splash, dirt and oil. It is fitted with "A-N" outlet fittings, either straight or adjustable to 45 degrees. The plunger over-travel beyond the point of switch operation is 3/8" on the Type H and 1¼" on the Type HO3. The Type R-31 Micro Switch is easily installed on two mounting pins within the housing.

Data sheet No. 27 gives full engineering data on the series M brackets.

Micro Switch is a trade name indicating manufacture by Micro Switch Corporation

Catalog No. 70 furnishes general data on switches for aircraft. Ask for as many copies as you need

MICRO MS SWITCH

Manufactured in FREEPORT, Illinois, by Micro Switch Corporation

© 1942

Branches: 43 E. Ohio St., Chicago · 11 Park Place, New York City · Sales and Engineering Offices: Boston · Hartford · Los Angeles

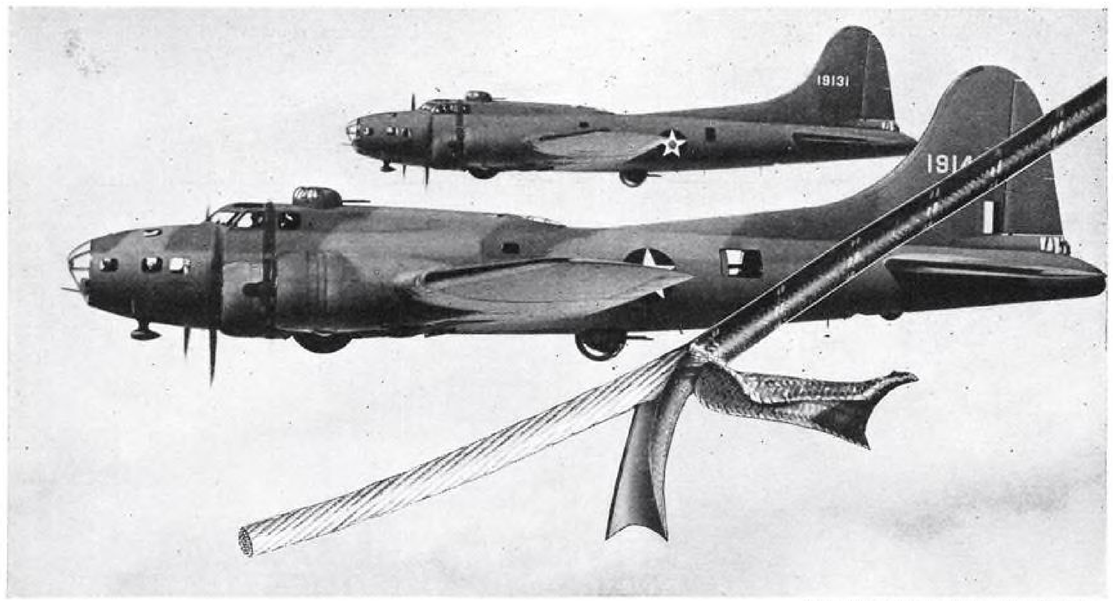

Belden Wire Is Used on Boeing Flying Fortresses.

On Low Tension Aircraft Wire—
BALANCED INSULATION Means Longer Service —under All Conditions

BALANCED INSULATION
—on spark plug wire

Belden Code Reinforce has been specially designed to meet the rigid requirements for high tension aircraft wire. Its properties have been carefully balanced to assure maximum performance in actual service. It has been tested and approved by the Bureau of Standards for conformance to Army-Navy AN-J-C-56 specifications. A wide range of other Belden high tension wires is available for all requirements.

Modern aircraft's rigid requirements for power and lighting cable are more than met by Belden's new low tension wire with Balanced Insulation. Every characteristic essential to this service has been taken into account. Belden Primary Wire has been approved under AN-J-C-48 specifications. It is:

1. Heat resistant
2. Cold resistant
3. Age resistant
4. Oil and grease resistant
5. Abrasion resistant
6. Flame resistant
7. Light in weight per unit length
8. Small in over-all diameter
9. Moisture resistant
10. Well insulated for this service
11. Impact resistant
12. Compression resistant
13. Readily stripped—easily cleaned
14. Low in cost

Specify Belden—Write for complete information
Belden Manufacturing Company
4665 W. Van Buren St., Chicago, Ill.

Belden Aircraft WIRE

Starter, Lighting, and Instrument Cables √ √ √ SPARK PLUG WIRES

Designing Better Cargo Planes

A discussion of the deficiencies of converted passenger airplanes for cargo transport and future desirable operating requirements.*

By CHARLES FROESCH
Chief Engineer, Eastern Air Lines, Inc.

ONLY TEN MONTHS have elapsed since the airlines of the United States were called upon to begin the transportation of cargo on a large scale for the military services. The volume of cargo so far flown and its rate of daily increase have presented cargo handling and transporting problems which must be satisfactorily solved before air cargo transportation can become a routine operation.

Expedient solutions are meeting the present emergency but fundamental thinking and reasoning must be followed to derive specifications applying to cargo airplanes in order to establish the transportation of air express and air freight as a commercial business at the termination of the war.

Flying has become an accepted means of transportation by the commercial traveler as well as the vacationist but the carriage of goods by air has lagged primarily because of the lack of suitable flying equipment and handling facilities. Furthermore, the relatively small amount of space available for air cargo has been indirectly the cause for the existing high tariffs which, in most instances, have been higher per pound per mile than comparative passenger rates.

When it became obvious at the beginning of this war that speed of transportation for critical military materiel was essential, it was logical that available passenger equipment in use, or already designed and ready to be produced, should be quickly altered to meet this immediate demand.

The result was that airline equipment was pressed into cargo operating service literally overnight and speedily converted for such service by the removal of all passenger accommodations, strengthening the floors with additional covering and changing the radio equipment to meet military requirements.

This conversion was effective, although rather inefficient insofar as maximum ratio of useful load to gross weight is concerned, but this was partly offset by lifting commercial weight restrictions and increasing takeoff weights in the order of 20 per cent with surprisingly safe and reliable results, which incidentally, emphasize the conservativeness of commercial equipment maximum operating weight ratings.

The standard Lockheed *Lodestar*, Douglas DC-2 and DC-3 transport airplanes were thus modified and are doing an excellent job. Later on, production of the C-47 which is basically a DC-3 cargo version having a large side loading door; the C-46, a modification

* Paper presented at the Air Cargo Engineering Meeting sponsored by the Chicago Section of the Society of Automotive Engineers, with the cooperation of the SAE Aircraft Activity, the Air Transport Association of America and the Aeronautical Chamber of Commerce, Dec. 8, 1942.

More Durable, More Foolproof Wood Aircraft Assembly

NOW POSSIBLE WITH NEW NON-ACID "WARM-SETTING" PHENOL RESIN GLUE!

WE invite your inquiries about a newly developed phenol-formaldehyde resin glue which sets new standards for wood aircraft assembly—with these outstanding qualities:

DURABLE—Produces typical boilproof, fungus-proof phenol-resin bond.

NON-ACID—The set film is *slightly alkaline*, far exceeds AN-G-8 requirements. Eliminates known weakening of wood that occurs with use of highly acid catalysts.

FOOLPROOF—Set resin is non-crazing, has good gap-filling qualities. Makes strong bond on joints where perfect fit may be difficult or impossible to attain.

LONG ASSEMBLY—Permits immediate pressing—or up to 1½ hrs. may elapse between application and pressure.

WARM-SETTING—Sets in warm storage room (140° F.).

We are glad to supply latest information on this new glue to assembly plants—on request. Address: Casein Company of America *(Dept. A12)*, 350 Madison Avenue, New York, N. Y.

CASEIN COMPANY OF AMERICA
Aircraft Glues

Phenol-resin, Urea-resin and Casein glues to meet all aircraft requirements

of the original 36-passenger Curtiss-Wright CW-20 commercial transport airplane; and the C-54, a conversion of the production DC-4 airplane, swelled the ranks of cargo airplanes to expedite movements of military personnel and materiel. A more recent modification was that of the Consolidated B-24 four-engine bomber to long range cargo carrier and known as the C-87.

While the following discussion covers the deficiencies of all these airplanes as applied to air cargo operation, it must be remembered that none of them were designed strictly as cargo carriers or for conversion to air cargo transportation and, therefore, none of these criticisms and shortcomings can or do reflect, in any manner, on the equipment manufacturers themselves.

In the first place, no one knew just what a cargo airplane ought to be and with limited airline experience in cargo operation, much difference of opinion still prevails on the characteristics and specifications involved in the design of this type of airplane.

However, we are fortunate to be in the same position as the beginner photographer who is proverbially taught how to take bad pictures in order to learn how to take good ones.

Let us, therefore, analyze the deficiencies of these converted airliners and outline suggested modifications for future equipment in the light of our limited operating experience.

First of all, we find that the conventional type of landing gear renders loading of the cargo compartment with heavy cargo pieces difficult because of the floor gradient. This is aggravated by the lack of anchor points for hoist attachment to help pull heavy items at the entrance door or in the cabin. Also, that in order to have a necessarily horizontal floor in the region of the loading door, the main floor makes an angle with it and causes concentrated loading when handling heavy long pieces of cargo with resultant floor damage.

Second, we find that the standard passenger cabin floors are too weak to stand concentrated loads as well as the rough usage to which they are now subjected as cargo carriers. This has demanded their reinforcement by either strengthening the present floor structure or covering it with an additional floor. This supplemental floor consisted generally of plywood sheeting $\frac{3}{8}$ in. to $\frac{3}{4}$ in. thick and has been found quite serviceable although it substantially increased the empty weight.

Third, we find that in the converted airliners, the cabin entrance door is too narrow and too low to take the bulkier cargo pieces. This restriction seriously impedes efficient loading and unloading and limits the size of cargo pieces which can be handled. This is an important item when it is considered that the size of cargo pieces may commonly run from an article so small as to require wrapping its shipping label around it instead of pasting it, to automotive units measuring almost 13 ft. in length, $6\frac{1}{2}$ ft. in width, $4\frac{1}{2}$ ft. in height and weighing 2500 lb. Occasional loads either have greater dimensions and/or weight. It would be desirable to have an additional door, located opposite, to enable simultaneous loading and unloading and thus save time on the ground, particularly when one or two pieces of a load are difficult to handle, either due to size or weight.

Fourth, we find that when we have placed the cargo within the airplane in its proper location, no means are available to anchor the tie-down cables, ropes or other devices used and a makeshift installation must be provided.

Each type of cargo presents a somewhat different problem in tie-down procedure. Methods of tie-down vary with individual airline interpretation due to lack of basic provision in the airplanes. Some airplanes have ring tie-down fasteners attached to the floor

(*Turn to page* 367)



THE STEM DOES THE WORK IN A CHERRY BLIND RIVET

Positive head formation and shank expansion produced by rivet stem. No bucking bar needed

The Cherry Rivet is designed to do a first class riveting job in the blind or hard-to-get-at places in aircraft structures. This rivet is actually an assembly, consisting of a standard aircraft rivet which has been drilled and through which passes an aluminum alloy mandril or stem.

SPECIAL GUNS USED—The rivet can be placed in the work first or the projecting stem can be placed in the gun head and then inserted in the work. The gun may be either a hand-operated or power tool. (Head of the G-15 Pneumatic Gun is shown above.) In either case the gun pulls on the stem and pushes on the rivet head. As the stem is pulled through the rivet it forms a tulip head on the blind side, expands the shank of the rivet and permanently plugs the rivet. The pull continues until the stem breaks and frees the gun. The stem is then trimmed flush with flat ground nippers.

FAST OPERATION—Cherry Rivets can be applied at the rate of 800 to 1600 per hour depending upon the type of rivet used. They give satisfactory performance with reasonable tolerance in grip length and hole size. Complete instruction on Cherry Rivets and their application furnished on request.



Mandril in the self-plugging Cherry Rivet, when pulled by special gun, forms a tulip head, expands rivet shank, permanently plugs the rivet and then breaks, releasing gun. The mandril is trimmed.

MANUFACTURED UNDER U. S. PATENT NO. 2,183,543 AND OTHER PATENTS PENDING

Cherry Rivet Company
LOS ANGELES, CALIFORNIA

SCOURGE of the PACIFIC

Wake Island . . . Coral Sea . . . Midway . . . the Solomons . . . whenever and wherever Tojo thrusts his task forces or transports . . . Grumman Wildcats and Avengers play an important part in wrecking his plans.

The success of F4F's and TBF's is not a matter of chance. Sea duty and deck landings demand the structural "guts" and precision performance that Grumman builds into *every* plane . . . characteristics born of long experience in designing and building aircraft for specific services.

These rugged Grumman planes are the scourge of the Pacific because they're built for the job . . . are doing it so effectively because of the skill and energy and daring of the lads who man them!

Wildcats & Avengers

Grumman Aircraft Engineering Corporation • Bethpage • Long Island • New York

GUARDITE RECTANGULAR LOW PRESSURE CHAMBER
for simulation of high altitudes of flight . . . . . .

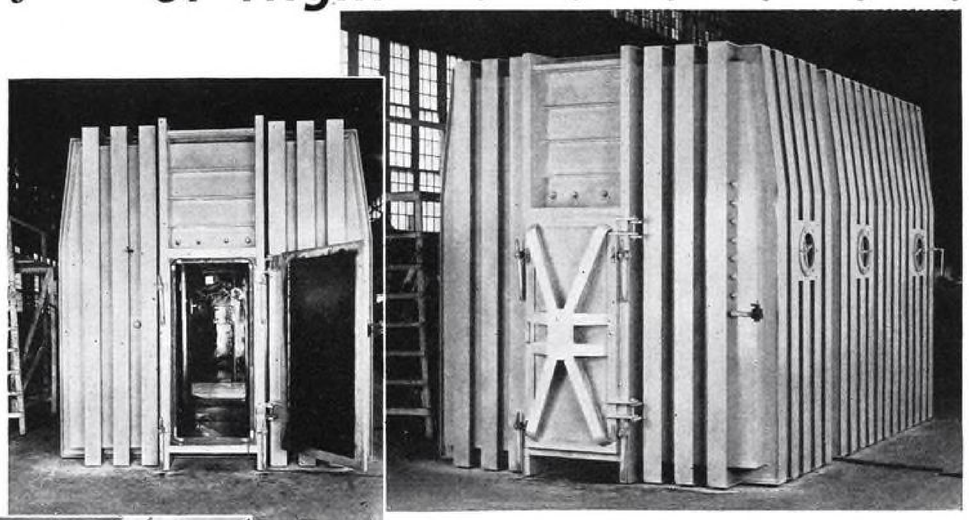

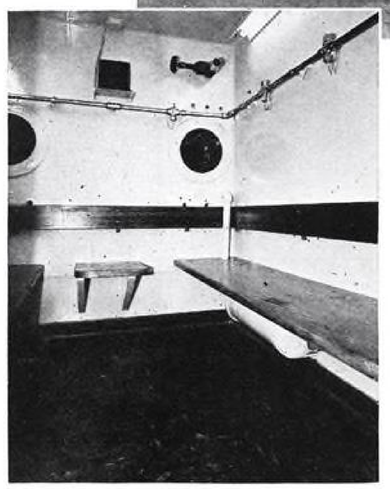

★ Simulates both pressure and temperature conditions as required. Tests all parts of an airplane.

The GUARDITE CORPORATION, builders of rectangular chambers for the past twelve years, pioneered this type of chamber in 1932. Hundreds today are in operation.

Less critical material is required for a larger volume of working space in rectangular chamber as compared to a round chamber.

The test chamber is all welded sheet steel. It can be made to any desired size. Doors can be made to specified dimensions to accommodate need. They can be operated by air or manually.

Full details upon request.

The GUARDITE CORPORATION

332 S. MICHIGAN AVENUE • CHICAGO, ILLINOIS

(*Continued from page* 364)

frames, others have side rails and still others employ a combination of both means. The most common practice is to use ropes tied in an indiscriminate manner, usually following the fancy of the handler lashing the cargo. Nets are used but need frequent replacement.

Many ideas are being tried and each particular type has its own merits and drawbacks. No matter what tie-down means are successfully developed, their satisfactory application will depend primarily on the proper training of the loading personnel in their use.

Fifth, we find that no provisions are readily available for a cargo handler station.

Sixth, we find a lack of simple and concise information to permit the loading personnel to accurately distribute the cargo load within the prescribed balance limits. In addition, it is often difficult to place heavy pieces within the cabin and still retain a center of gravity location which will not seriously affect longitudinal stability as well as takeoff and landing characteristics.

For instance, when a load of 6,000 lb. is carried in the C-49, its CG must be at a point, roughly, 28 per cent of the cabin length measured from the forward cabin wall. This seriously limits the available placement volume if the cargo is bulky.

The arrangement of cargo is at best a process requiring intelligent action in view of the variable weight, size and type of cargo pieces, besides the fact that such cargo may be bound for several destinations requiring placement in the compartment to allow sequence unloading.

Loading requires the coordinated effort of the plane crew, ground operations, loading personnel and, when in flight, communications to keep station delays due to loading and unloading at a minimum.

Seventh, we find that the lavatory compartment is in the wrong place as it is often difficult, in flight, to reach it from the pilot's cockpit with an airplane fully loaded with bulky materiel of low density.

Eighth, we find that no provisions are available for fire detecting and extinguishing in the passenger cabin converted to cargo compartment as hand fire extinguishers are the only requirements for passenger operation.

Ninth, we find that each type of airplane has a different doorsill to ground height, necessitating lifting or lowering the cargo when loading from a standard motor truck platform height. This has resulted in serious delays, trip cancellations and inability to operate on schedule. For instance, the doorsill height from the ground is but 3 ft. 6 in. for the C-87, whereas it is 9 ft. 8 in. for the C-54, or a difference of 6 ft. 2 in. between the two.

It has necessitated the use of makeshift devices such as loading ramps to enable transfer from standard truck platform height.

Tenth, we find that the cross section of the fuselage, usually of circular or oval shape, does not permit maximum space utilization.

These are ten primary deficiencies found in the operation of converted passenger transport airplanes for air cargo service as well as in airplane originally designed for passenger operation and factory modernized for cargo carrying.

While our primary purpose at the present time is to win the war, we must, nevertheless, look deeper and make plans for the future, or at least try to conceive what air transport operations are likely to be afterwards. Naturally, whatever changes are made by following this line of thought will also apply to military cargo airplanes with the exception, perhaps, of speed, which for military purposes must remain more important than operating cost.

In thinking of the progress of air transportation and its place in our

COMPREGWOOD

Impregnated Super-Pressed Phenolic Plywood Made to order in shaped or flat elements of any desired thickness with dimensional stability carried to new heights.

INQUIRIES SOLICITED

Designers and Engineers are Invited to explore the exciting qualities of the new material, Compregwood

Complete Laboratory Research Facilities Available

Adjustable pitch test clubs with molded Compregwood blades, as supplied to U. S. Navy and Army Air Corps, are but one of the many applications of the new material, Compregwood.

CAMFIELD MANUFACTURING CO.

GRAND HAVEN, MICHIGAN

Employing the latest advancements in the phenolic impregnation of woods, with radio frequency curing. Fully equipped for volume production.

national system, we must try to find its proper relationship with other available surface means. Obviously, we cannot hope to fly every traveler and carry every type of merchandise with maximum economy and must, therefore, segregate passengers and cargo by purpose and distance of travel.

Before we can tentatively set down operating requirements for airplanes designed basically for commercial air cargo operation, we must first determine just what are the fundamental laws which apply to the transportation of air cargo.

The principal service the air cargo operator has to offer to the shipper is the speedy and safe transportation of his products. He must furnish this service at a sufficiently low tariff to attract and continue to carry a large volume of traffic. Air express volume has been built in the past primarily on the demand for emergency and perishable shipments which could bear a rate premium and as such can never grow to a substantial size.

Our first consideration, therefore, should be lowest possible operating cost per ton mile. This is a necessity if we desire to obtain a large volume of business and compete with other means of express and freight transport which now have substantially lower rates per ton mile from door to door than we have been able to obtain with the airplane to date.

First-class rail express is moved at a cost to the shipper at an average of ten to twelve cents per ton/mile and if this rate can be met, including pickup and delivery cost, there should be a large volume of business available for movement by air and including most commodities now going by rail express.

We certainly cannot hope, nor expect to supplant existing means of surface transport, as at one time or another in the course of modern processing or fabrication of commodities or articles, practically all such means are utilized. The airplane will probably limit its service to the transportation of merchandise representing either a high density or volume cost such as expensive tools and vacuum tubes, thus becoming intermediate means of carrying finished products from factory to consumer with maximum expediency.

A ten to twelve cent per ton/mile rate is not impossible if we judiciously interpret and apply our present knowledge of aerodynamics, improvements in structures and larger power plants to the design of strictly cargo carrying airplanes.

It is true that mileage from point to point is invariably lower by air and that the elimination of heavy packaging decreases cost of cargo preparation and promotes efficient utilization of the airplane, but still these advantages come far short of overcoming the differential between air and rail express tariffs.

We can possibly go further by exploring the field of LCL freight which might possibly be handled as second-class or deferred express, bearing a lower rate and used to increase the average load factor, thus reducing average ton/miles/hr. cost.

At a later date we may conceive the use of cargo glider trains with takeoff and landing strips alongside factories simulating present railroad sidings. However, this discussion is limited to operating requirements of cargo airplanes only.

A cargo airplane should be a vehicle to carry merchandise not only at the lowest possible cost, but at the highest permissible speed. High speed is essential but if it is to be obtained purely by a reduction in cruising power loading, operating costs will be higher, since speed varies as the cube root to the horsepower. This being the case,

(*Turn to page* 371)

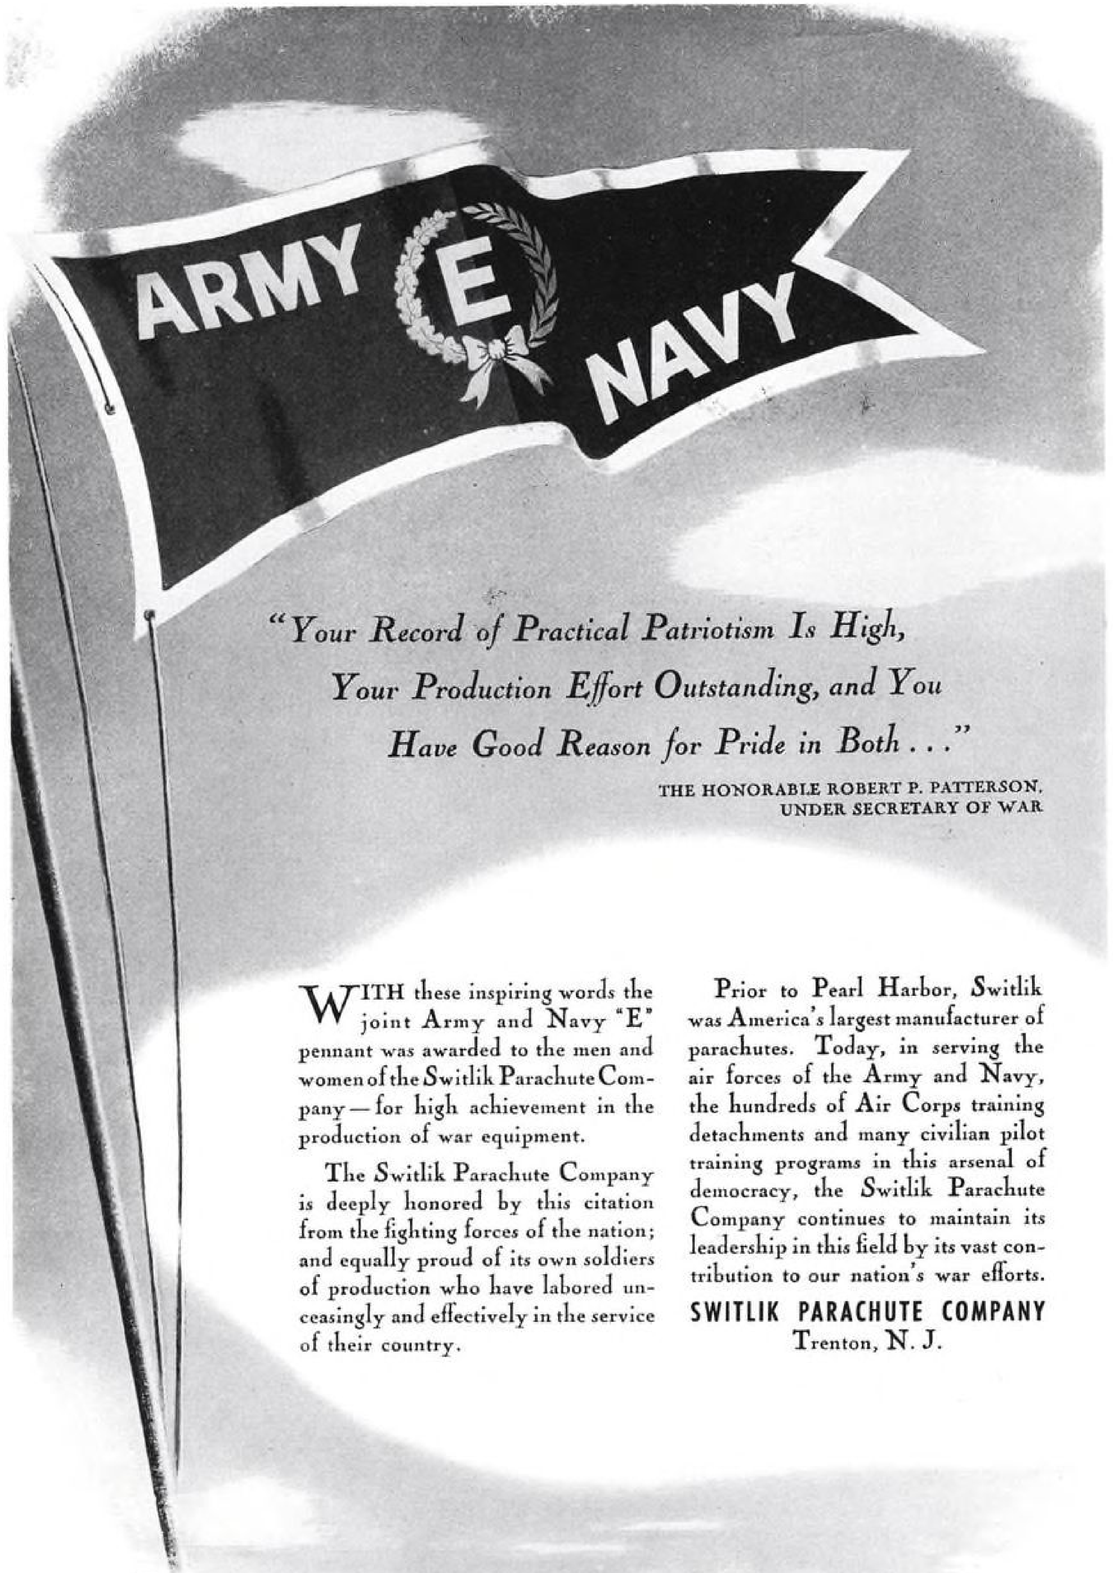

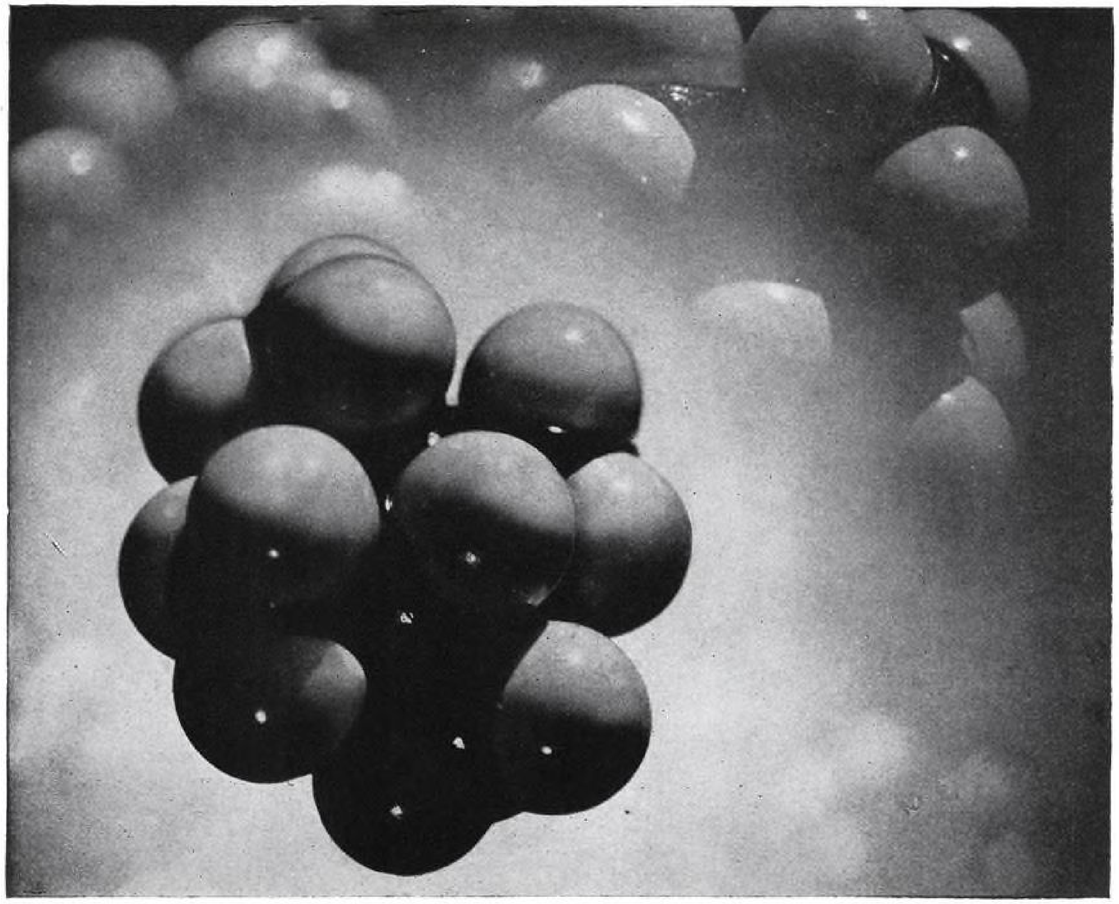

BUILT-IN TAIL WIND

SHOWN ABOVE is an amazingly effective device for increasing the speed, cruising range and climbing ability of airplanes.

It is a molecule—represented by a chemist's model 100 million times life size—of neo-hexane, one of the modern synthetic products of the petroleum industry that far surpass gasoline as fuel for aviation engines.

The discovery of neo-hexane (known also as 2,2 dimethylbutane) was a triumph of the petroleum industry's peacetime search for more efficient fuels. Long before Pearl Harbor, the American oil industry had discovered and developed processes for manufacturing this and a number of other high octane blending agents so that today we are able to supply all planes of the United Nations with very high octane motor fuel.

The production of aviation gasoline is no longer a matter of simply distilling and cracking crude petroleum. It is a highly complex chemical art—a science of synthesizing special compounds that can be blended into fuels of predetermined characteristics.

Among the chemicals which give our aviation gasoline its high antiknock quality is Ethyl fluid. That is why Ethyl engineers cooperate with the petroleum industry in their search for better aviation fuels. And, since fuels and engines are so closely related in their development and use, we also do all that we can to be helpful in the development of engines which will best utilize these improved fuels.

ETHYL CORPORATION
Chrysler Building, New York City

Manufacturers of Ethyl fluid, used by oil refiners to improve the antiknock quality of aviation gasoline.

(*Continued from page* 368)

tariffs would have to be raised and volume obtainable lowered.

For a given airplane, designed for a specific gross weight, and having a given wing loading, there is a power loading which is most economical. In other words, there is a balance between maximum payload and lowest cruising horsepower on one hand, and low power loading with reduced payload on the other.

This can be readily determined with a given airplane by calculating its transportation efficiency factor expressed in ton/miles/hp./hour for several horsepower values, that is:

$$\frac{Pl \times Ve}{HPc}$$

Where Pl=payload in tons
Ve=cruising speed in mph.
Hpe=cruising horsepower

The overall efficiency factor of the airplane can be obtained by multiplying the structural efficiency expressed by operational useful load gross weight by the aerodynamic as expressed by cruising speed/hp. and plotting against range.

Obviously, there is nothing to be gained if due to high speed the cargo must wait several hours to be unloaded at destination, such as might occur with a load of perishables having left the field of origin the evening before and arrived at destination several hours ahead of customary delivery time.

I fear to tread on the question of airplane size, except to mention that it must be remembered that larger airplanes permit higher ratios of useful load to gross weight and also greater range for a given load, as many airplane components and detail weights do not increase proportionately to the gross weight. Airplane size at present is limited by available engines, although this existing restriction may be reversed with the conception of large airplanes requiring several years to design and fabricate experimental prototypes. As a matter of fact, engines will need to be conceived and developed to permit lower fuel cost per ton mile and more miles per gallon or else air cargo expansion may find itself seriously curtailed especially for long range operation.

Cargo airplane size and capacity cannot be predicated until a thorough analysis of the air express and freight market has been made. All we know is that air express is here to stay and that its volume will depend on the cost of the service to the shipper. Also, that air freight will follow in the wake of any rate reduction which can be made to render its transportation competitive with other means.

Obviously, the sales price of any

FASTER! FASTER! Speed is indispensable to victory. If you can't get your small parts *when* you need them or the *way* you want them, send us your specifications. Special nails, rivets and screws in any metal. Catalog on request.

JOHN HASSALL, INC.

126 Clay Street, Brooklyn, N. Y.
Established 1850



TESTORS

AIRCRAFT DOPE

Cellulose nitrate and acetate butyrate, clear and pigmented; also thinner.

★

Manufactured strictly according to Army-Navy specifications.

★

Also: zinc chromate primer, lacquers, enamels, surfacers, sealers, etc.

***Send* FOR THIS FOLDER**

Describes our facilities..shows how we can best serve you.

TESTOR CHEMICAL CO., 2300 CHARLES ST., ROCKFORD, ILL.

A-1 ROTARY BURS and FILES on A-9 Priority

(Bur) (File) (Bur) (File)

OVER 200 STYLES—
Made from High Speed Steel
65% OF ORDERS SHIPPED COMPLETE OR PARTIAL WITHIN ONE DAY.

Write for 12-page Bur Bulletin

MARTINDALE ELECTRIC CO.
1418 Hird Ave. Cleveland, Ohio

BALDOR
BALL BEARING **GRINDERS**

HEAVY DUTY

BALDOR Grinder No. 803, ¾ h.p., heavy-duty, ball-bearing. Capacitor type motor (guaranteed 2 yrs. against burn-out) 3400 r.p.m., 110 volt, single phase. **$60.00**

BALDOR ELECTRIC COMPANY
4380 Duncan Ave. ST. LOUIS, MO.

BALDOR
ELECTRICAL SPECIALISTS FOR 22 YEARS
Manufacturers of
Electric Motors
Electric Motor Grinders
Battery Chargers
Fast Battery Chargers
Battery Testers
Write for Bulletins
BALDOR ELECTRIC COMPANY
4380 Duncan Ave. ST. LOUIS, MO.

cargo airplane must be as low as possible because on the basis of modern experience, depreciation amounts to, roughly, 10 percent of direct flight costs.

Type Considerations

Generally speaking, the type of cargo airplane which appears most suitable points to a high wing bimotor with tricycle gear. For larger capacities and longer range, a four engine low wing might be considered superior.

Because of its simplicity, the bimotor type is more economical and meets the most important operating requirements for the following reasons:

1. It has the simplest powerplant combination and meets the requirement for safe operation and reliability with least servicing and maintenance. Single engine performance must be sufficient to maintain a safe altitude over the highest obstacle to be negotiated.

2. A high wing combination permits low fuselage and, therefore, low door height to ground, besides having ample wing to ground clearance to allow freedom of movement for ground vehicles without danger of hitting the wing.

Furthermore, large propellers may make a high wing or mid-wing location almost mandatory for any cargo airplane up to a given size.

3. The use of a tricycle landing gear is necessary to obtain a level loading floor and ease of loading and unloading.

In practically all landings, the pilot usually flares the airplane more than is necessary, with resultant higher vertical velocity upon impact on the runway unless lift is retained by high landing speed.

From an operational viewpoint, the elimination of the landing flareout necessary with the conventional type of landing gear is an advantage as with instrument landing in bad weather the airplane must be virtually flown to the ground.

One of the basic characteristics of cargo airplanes should be the largest possible center of gravity travel to eliminate critical load distribution.

Cargo Compartment

The cross-section of the cargo compartment should be square or rectangular in section for maximum space utilization and cargo holddown anchor location simplification. There should be no sharp corners which might be a source of personnel hazard, besides being dirt collectors. The minimum height of the compartment should be 6 ft. 6 in. to allow walking throughout its entire length erectly.

There should be at least one large loading door on the left side, together with a smaller size one for crew entrance and exit at the front end of the same side. Preferably, and I repeat what I mentioned earlier, another large loading door should be located on the opposite side somewhat ahead of the left loading door to enable loading and unloading at the same time. The relative location of these doors lengthwise to the cargo compartment could readily be determined from actual experience with a mockup test.

The doors should be designed to present minimum obstruction to loading and unloading. Flush mounted sliding doors would best meet this requirement.

Cargo compartment floors should be on the same level to expedite loading and eliminate steps as a source of accidents. Such flooring should be of sufficient strength to take a high load concentration and the entrance door region should be designed to take a load concentration equal to the heaviest piece expected to be carried. This may require a good guess as about 90 per cent of all express packages are shipped in corrugated boxes or light wooden crates which can be carried by one man. However, the remaining 10 per cent may include aircraft engines weighing up to 3,500 or 4,000 lb. as well as other pieces of heavy machin-

(*Turn to page* 375)

HARTZELL

DAY and NIGHT

Here at the greatly enlarged Hartzell plant we are working day and night to insure that the final story of this war will not hinge on the words "too little, too late." Our contribution is a small part of the total effort, but that small part is as right as we can make it.

HARTZELL PROPELLER COMPANY
PIQUA, OHIO, U.S.A.

WORTHINGTON AIR FIELD "Grass Blitzer"—
The only machine specially designed to meet Air Field mowing problems

Specialists in mowing and turf maintenance for 30 years, it was only logical for Worthington engineers to look ahead to the difficult problems presented by the vast and growing Air Field acreage which must be cut regularly, speedily and often in order to "Keep 'em Flying."

Existing farm and golf course machinery is entirely inadequate for this tremendous task. So the Worthington Air Field "Grass Blitzer" was created—a revolutionary type, 9-gang mower and fast tractor with a cutting swath of 21 feet 2 inches and with a grass cutting capacity over 4 times greater than any other method available.

If you have Air Field mowing and turf maintenance problems, why not consult with us today; write or wire.

WORTHINGTON MOWER COMPANY Home Office: Stroudsburg, Pa.

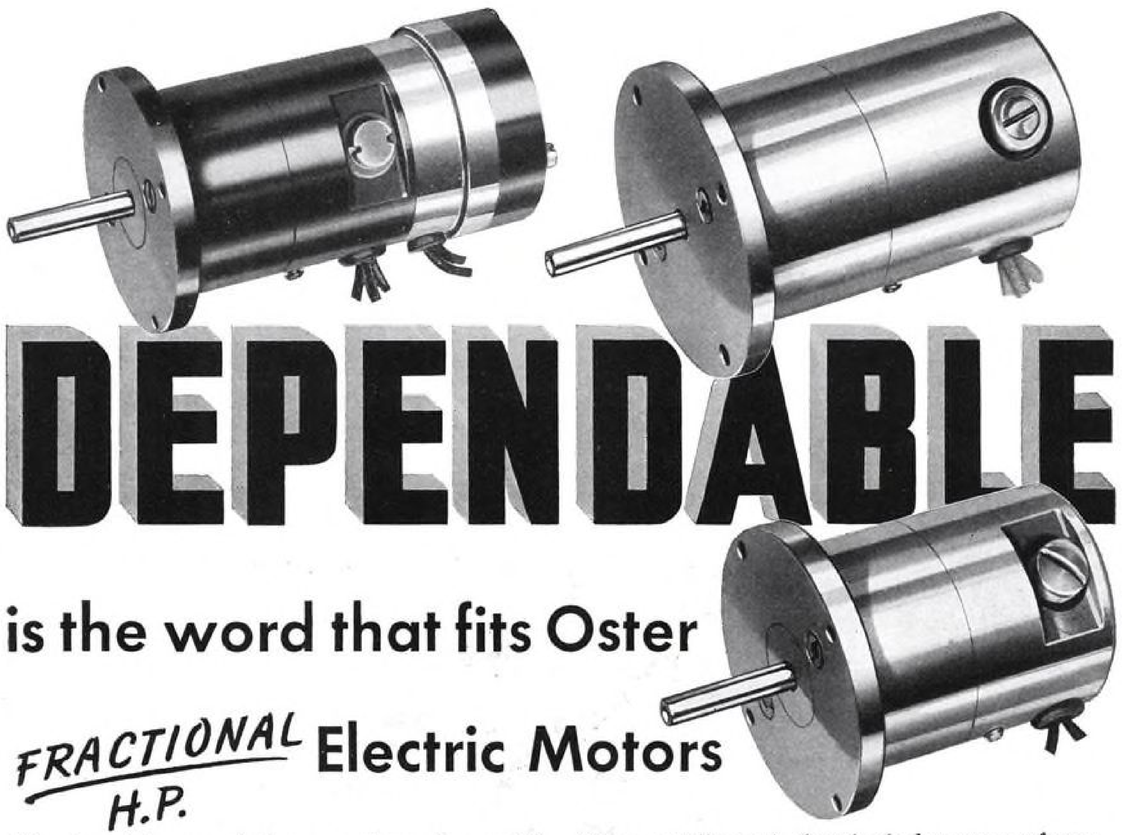

DEPENDABLE

is the word that fits Oster

FRACTIONAL H.P. Electric Motors

It's the right word, because there is a solid foundation for Oster dependability. Fifteen years of manufacturing experience. Established standards of precision. A veteran labor force, accustomed to working together. A background of thorough engineering. A performance record (as original equipment on Oster appliances) that includes years of service for various departments of United States and foreign governments . . . All these are *facts* that back up your good judgment in selecting Oster. Remember Oster as a name worth remembering, in the fractional H. P. field. *John Oster Mfg. Co., of Ill., Genoa, Ill.*

M-5

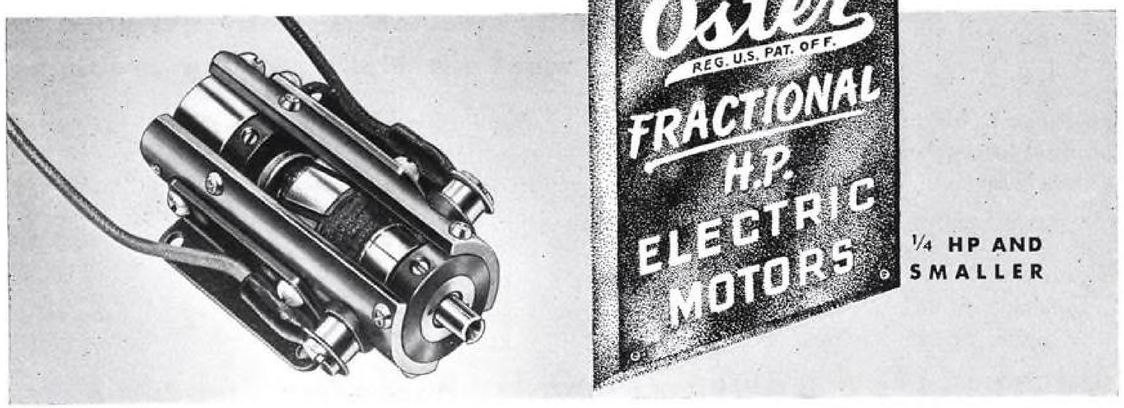

(*Continued from page* 372)

ery which have been carried in the past as emergency shipments.

From the economic point of view it does not appear logical to increase the empty weight of every cargo airplane of a fleet to handle this 10 per cent of cargo and the solution may be that only a few such cargo airplanes will be sufficiently strengthened to take what is virtually heavy freight.

Cargo space volume for any given airplane size should be based on an average express or freight density.

Rail freight averages 32 lb. per cu. ft. and rail express about 12 lb. per cu. ft., while airmail averages 9 lb. per cu. ft. If we assume that improvements in packaging can reduce express tare 20 per cent, we arrive at an air express density of approximately 9½ lb. per cu. ft.

Allowing for unusable space plus a certain amount of space in the region of the loading door which should probably be kept clear at all times, we can set down a density volume ratio of 8 to 9 lb. per cu. ft. as design criterion in determining the size of the cargo compartment.

Cargo stowage means should be light and efficient, suitable cargo tie-down devices should be provided flush-mounted and built integrally with the floor and side wall struetures. Provisions should be made for a flexible segregation of the cargo compartment space into bins and sections, such as may be obtained by the use of movable stanchions with flexible partitions such as chain doors, which are light. The side walls up to a minimum height of 30 in. from the floor should be protected by means of suitable removable panels, fabricated perhaps from laminated plastic having varying thickness from the ground to their maximum height to secure least weight for maximum protection.

Only sufficient windows should be incorporated to give satisfactory light and these could be portholes. Cargo compartment lighting must be protected against damage. Such lighting should be adequate as much work will be done at night.

Heating and Ventilation

The entire cargo compartment should be well-ventilated without being drafty. Heating should be provided in the design to maintain a 50 deg. F. temperature which is necessary when perishables such as flowers, fruits and animals are to be transported.

It will be necessary when operating in cold climates to provide temperature insulation and such insulation should be made readily removable for two reasons. First, weight saving when it is not needed, and second, to allow periodic cleaning.

It is not believed that the cargo compartment, as a whole, needs to be soundproofed, although such soundproofing should be made available in sections in case it should be required.

Provisions should be made for air-conditioning and possibly refrigerating.

Cockpit

Cockpit arrangement should include space for cargo handler station. The cargo handler's duties would be to keep track of all cargo pieces, check and prepare cargo manifest, check destination of cargo, supervise loading and unloading, check the CG location of the cargo for balance, as well as any other "in flight" duties which may be required.

A small cargo compartment should be provided and readily accessible from the cockpit for the safekeeping of valuables. This compartment should be close to the cargo handler's station as

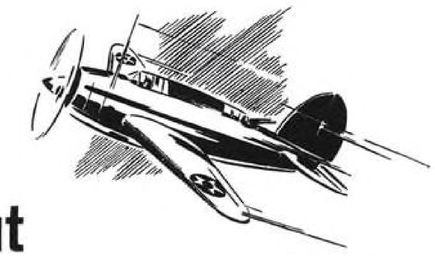

You Can Put PLANES into MASS PRODUCTION

easier • faster • cheaper with these ACP Products

Prime and sub contractors faced with the tremendous aircraft production goal will find help in ACP's years of experience.

DEOXIDINE, the acid cleaner that made the all-steel automobile body possible in mass production is now aiding in the mass production of aircraft. Prepares steel, aluminum and dural for painting, leaving an etched surface that holds paint perfectly.

KEMICK, a chemical paint that holds to and protects metal surfaces even when red hot, has been used for years the world over on mild steel exhaust manifolds . . . can eliminate stainless steel exhaust lines. FLOSOL wets oily surfaces, is an exceptional soldering flux for steel, brass, copper, tin, terne plate and zinc.

ACP has been working steadily on the treatment of metals for the Aviation Industry—and all industries . . . the knowledge of ACP technicians and chemists is available to you.

•

Other ACP Products that contribute to the war effort are: RODINE, the pickling inhibitor that saves steel and acid; CUPRODINE for producing tight, bright copper coatings on steel by simple immersion; LITHOFORM for coating galvanized iron to hold paint.

These are typical ACP Products. The experience of the ACP laboratories in metal treating and finishing processes is at your service.

AMERICAN CHEMICAL PAINT CO.

MAIN OFFICE AND WORKS
AMBLER • • • PENNA.

ACP

CHEMICALS ACP PROCESSES

DETROIT, MICH., 6335 Palmer Ave., E.
CANADIAN BRANCH
WALKERVILLE • • • ONT

it would be his responsibility to care for such valuables.

Miscellaneous

Among the miscellaneous operating requirements can be cited adequate fire protection for both power plant and cargo. For the latter, it is believed that a smoke detector should be a prerequisite as well as quick action extinguishing means.

Refueling and recoiling should be accomplished from the under-wing surface to eliminate the necessity of climbing over the top of the wing which in the past has always caused substantial distortion of the wing leading edge, has been the source of accident hazard, besides incurring additional labor time.

Obviously, powerplant assemblies must be designed so as to be quickly changed. This is a most desirable feature which has been lacking on all transport airplanes designed to date.

In general, reliability must govern detail design which should consider adequate bearing surfaces, ease of lubrication and self-lubrication for inaccessible places, adequate brakes, readily accessible and removable engine cowling and inspection doors bearing in mind that maximum utilization of equipment is one of the requirements for low operating cost.

In other words, the airplane should be designed so preventive maintenance and service methods can be best applied.

Cabin pressurization offers an increase in speed at high altitude but it is questionable as to whether the increase in structural weight and initial cost, as well as additional service and maintenance costs, will warrant its application to cargo airplanes, at least for the time being.

In order to simplify the ground handling of the cargo prior to loading or unloading, and gain a saving of ground time and labor, I would like to enter a plea for standardization of cargo loading door to ground height, possibly door size, cargo tie-down equipment within the cabin itself, and containers for the collective handling of small shipments, as it is not believed possible to standardize to any great extent on package size, except perhaps on the type and materials used in packaging in order to reduce tare which represents a high percentage of the total weight of the article being shipped. This is an important item which needs emphasis and will require an intelligent and imaginative study when it is considered that at present approximately 30 per cent of the weight of express shipments is packaging.

The development of air cargo will serve to accelerate the distribution of national and international wealth and promote similar commerce. It will allow greater enjoyment of the material wealth of the earth and it is hoped will also serve to eliminate intercontinental friction which since the world began has been the source of destructive warfare. This may be an idealistic goal, but it is my belief that the airplane, as a vehicle of speedy transport, can make it real.

Safety Tips

A recent CAB report shows that more than 33 percent of civil non-air carrier flying accidents occur during landing operations. Safety hints:

1. Know the traffic rules of your own or any other airport where you may land.
2. Be positive of wind direction and velocity.
3. Satisfy yourself there is no danger of collision with other aircraft.
4. During glide rev up the engine frequently and use heat control when necessary so you will have power available if you need it.

Simplifying
"AWKWARD" DRILLING JOBS

Those difficult, cramped working areas in aircraft construction are easily and efficiently handled with Terry Angle Drilling Attachments. Practically no spot is "too close" for accurate drilling. Terry Attachments are precision built, supplied in several types for portable electric and pneumatic drills. Full details on request.



GEORGE A. TERRY CO.
350 South Elmwood Ave. Buffalo, N. Y.

ANGLE DRILLING TERRY ATTACHMENTS
REG. U.S. PAT. OFF.

TURCO
MAIL THIS COUPON

Speed up Production
With SPECIALIZED INDUSTRIAL CHEMICAL COMPOUNDS

Turco manufactures a line of more than 225 Specialized Industrial Chemical Compounds which have been specifically designed to meet surface preparation and cleaning problems in every department of industry. All of these compounds have been repeatedly tested under field conditions and are contributing greatly to the necessary speedup of war production for Victory.

Check this coupon and mail it for free information.

TURCO PRODUCTS, INC., 22-122
6135 S. Central Ave., Los Angeles

Please send me FREE literature on materials, methods and procedure pertaining to the operations checked below:

NAME_____TITLE_____
FIRM_____
ADDRESS_____STATE_____

I'M INTERESTED IN THE OPERATIONS WHICH I HAVE CHECKED (✓):

- ☐ Acid Pickling
- ☐ Aluminum Spot Welding
- ☐ Anodizing
- ☐ Cadmium Plating
- ☐ Chemical Vapor Cleaning
- ☐ Chromatizing
- ☐ Cleaning Metals Before Processing
- ☐ Cleaning Prior to Plating
- ☐ Cold Immersion Cleaning
- ☐ Cold Spray Cleaning
- ☐ Floor Maintenance
- ☐ General Plant Maintenance
- ☐ Glass Cleaning
- ☐ Hot Immersion Cleaning
- ☐ Magnesium Processing
- ☐ Paint Camouflage Cleaning
- ☐ Paint Dept. Maintenance
- ☐ Paint Stripping
- ☐ Phosphatizing
- ☐ Scale Removal and Control
- ☐ Stainless Steel Processing
- ☐ Steam Boiler Maintenance

LOS ANGELES SAN FRANCISCO CHICAGO
TURCO PRODUCTS, INC.
HEAD OFFICE: 6135 S. CENTRAL AVE., LOS ANGELES
FACTORIES IN LOS ANGELES AND CHICAGO
Sales and Service Representatives and Warehouse Stocks in All Principal Cities

Avoid excess use of critical materials—
Swing to TRU-LOC BALL•TYPE TERMINALS

From the picture of cable and fitting above you can get the story at a glance—greater ease of handling in close quarters and important saving of weight. The reproduction of the terminal is approximately actual size yet its holding power equals the minimum breaking strength of the cable to which it is swaged.

The 3 kinds of TRU-LOC BALL • TYPE SWAGED FITTINGS are illustrated below. The data given may simplify your use of this great advance in aircraft control terminals.

To round out the service, we can supply—to your exact specifications—complete control assemblies using these TRU-LOC BALL • TYPE SWAGED FITTINGS.

LOAD→ **PLAIN BALL•TYPE SWAGED TERMINAL**
For use with Preformed cable, 7x7 construction, 1/16" and 3/32" diameters. Holds to approx. 80% of minimum rated breaking strength of cable.

LOAD→ **SINGLE SHANK BALL•TYPE SWAGED TERMINAL**
For use with Preformed cable, 7x7 construction, 1/16" and 3/32" diameters and 1x19 Preformed strand, diameters 1/16", 3/32", 1/8", 5/32" and 3/16". Holds to 100% of minimum rated breaking strength of cable and strand.

←LOAD→ **DOUBLE SHANK BALL•TYPE SWAGED TERMINAL**
For use with Preformed cable, 7x7 diameters of 1/16" and 3/32", in 7x19 construction in diameters of 1/8", 5/32" and 3/16". Holds to 100% of minimum rated breaking strength of cable.

More complete DATA on TRU-LOC BALL • TYPE TERMINALS in the folder illustrated above. A copy will be sent on request.

In Business for Your Safety

AUTOMOTIVE AND AIRCRAFT DIVISION
6-235 GENERAL MOTORS BUILDING · DETROIT, MICHIGAN

AMERICAN CHAIN & CABLE COMPANY, Inc.
BRIDGEPORT • CONNECTICUT

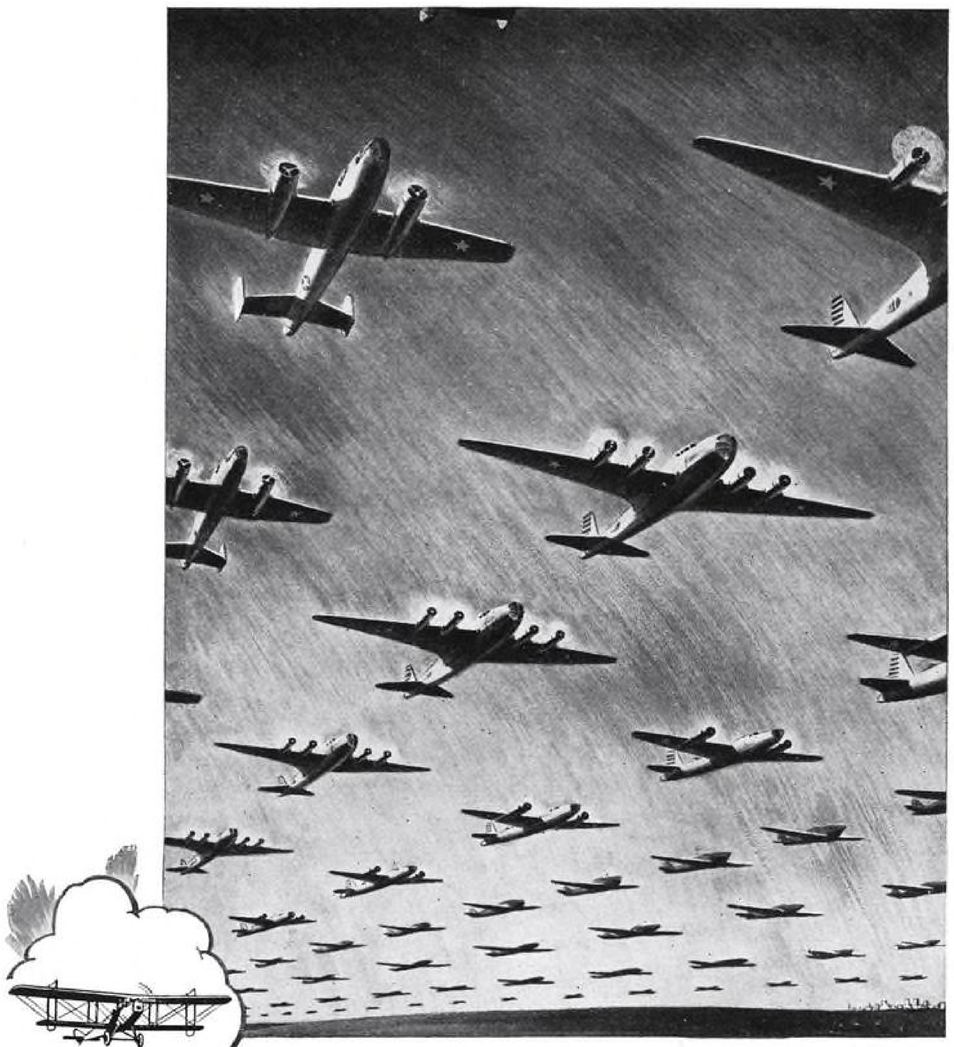

1917 **Exide** 1942

a veteran of the skyways

IN 1917, when the builders of fighting planes needed batteries, they naturally turned to Exide. For Exide had maintained a long and honorable career in the manufacture of storage batteries. They had the "know-how" and merited the job.

Those early Exide Aircraft Batteries set a performance standard which has never been relaxed. Today, their splendid counterparts are standard equipment with the majority of leading aircraft manufacturers. You'll find them in every type of modern plane . . . they helped to bomb Tokio, and they'll help to bomb Berlin.

Exide Aircraft Batteries have grown up with the fighting plane, and that's your guarantee to top-flight performance. For full information on your engineering problems, phone or wire to Exide, today!

THE ELECTRIC STORAGE BATTERY COMPANY, Philadelphia
The World's Largest Manufacturers of Storage Batteries for Every Purpose
Exide Batteries of Canada, Limited, Toronto

Exide
AIRCRAFT BATTERIES
IN THE AIR SINCE 1917

Select the STAINLESS STEEL Best for Your Job

. . . and Save Vital Materials, Time and Money . . .

All stainless steels are not alike. There are many different commercial analyses, and each analysis differs in physical properties. This variation in properties makes it important that you select a steel in light of the job it has to do. By careful selection of the proper stainless steel for your war-production job you can help conserve stainless steels and the metals used in making them . . . chromium, nickel, manganese, tungsten, columbium, and titanium. You will also save time and money.

Stainless steels are used throughout industry because of their superior resistance to corrosion and oxidation and their remarkable strength-weight ratio. Typical applications in essential industries are shown at the right.

We have more than 35 years' experience in the production, fabrication, and use of stainless steels. Although we do not make steel, we produce the "Electromet" ferro-alloys and metals used in making steels. Therefore, we are in a position to give impartial advice on selecting the steel best suited for your needs. If you have a problem involving the physical or metallurgical properties of stainless steel, call upon us. There is no obligation.

ELECTRO METALLURGICAL COMPANY
Unit of Union Carbide and Carbon Corporation
30 East 42nd Street UCC New York, N. Y.
In Canada, Electro Metallurgical Company of Canada, Limited, Welland, Ontario.

Electromet
Trade Mark
Ferro-Alloys & Metals

Expansion joints made of 18-8 stainless steel withstand corrosion in oil refinery piping.



Bubble caps deep-drawn from 14 per cent chromium steel sheet are used in fractionating towers.

Aircraft engine collector rings of stainless steel stabilized with columbium, contain 1 to 2 per cent manganese.



Heat exchanger of 18-8 molybdenum stainless steel resists hot organic acids under severe service conditions.



Stainless steel (18-8) drum and lining of this vacuum filter help keep products clean and pure.



Kneader made of 18-8 stainless steel is used in the manufacture of synthetic resins.



Irradiator used for increasing the active Vitamin D content of milk is made of 18-8 stainless steel.



Nitric acid cooler of 18 per cent chromium steel resists corrosive chemical action.

REG. U. S. AIR WING PAT. OFF.
FABRICS

TAPES FOR AVIATION USE

What tapes do you need? Airwing offers you a complete selection . . . pinked edge, sealedge and biased tapes . . . Grade A, light-weight and balloon . . . Utility, reinforcing and herringbone tapes. Airwing airplane and glider fabrics round out the famous Airwing line.

W. HARRIS THURSTON

40 Worth Street, New York City

***Factory and Warehouse*—17 Beach Street, N. Y.**

WESTERN REPRESENTATIVE—MILTON F. CHAPEL, 6604 SAN FERNANDO ROAD, GLENDALE, CALIF.

BAKER TRUCKS can help you to *Speed your deliveries*

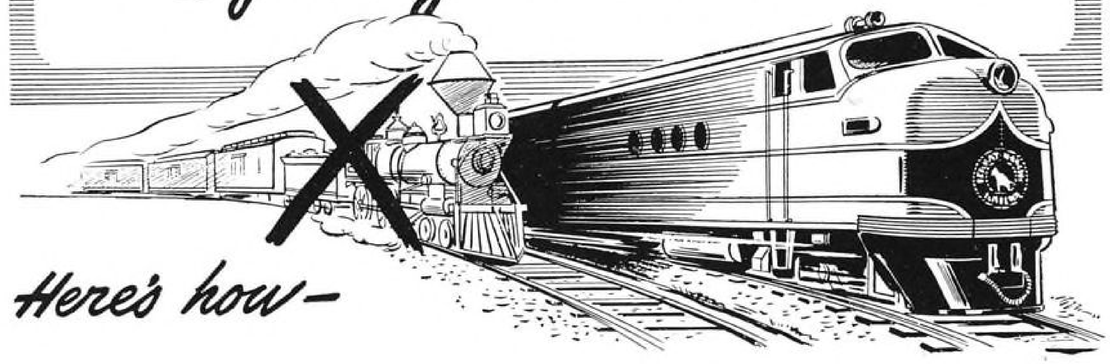

Here's how—

1. FASTER LOADING AND UNLOADING

Many man hours are saved loading and unloading box cars, trucks and trailers with Baker Low Lift and Elevating Trucks. Baker Crane Trucks speed loading and unloading of heavy, bulky materials on flat cars or ships.

2. SPEEDING PLANT PRODUCTION

By keeping materials moving and stepping up efficiency of machines and men, plant production can be increased and delivery dates moved up.

3. SHIPPING AND RECEIVING IN UNIT PACKAGES

The use of skids and pallets with Baker Trucks eliminates individual handling of parts or products —saving time on both shipping and receiving ends.

4. LESS DAMAGE IN HANDLING AND TRANSIT

By reducing piece handling and by better placing of materials in cars or trucks, loss by damage to merchandise is greatly reduced.

5. BETTER WAREHOUSE HANDLING

Baker Trucks speed handling in storage and bring the warehouse many minutes nearer to the loading platform.

★ ★ ★

THE BAKER MATERIAL HANDLING ENGINEER CAN HELP YOU

He knows how to make your material handling more efficient to speed your deliveries. He is at your service.

BAKER INDUSTRIAL TRUCK DIVISION

of The Baker Raulang Company

2182 West 25th Street • Cleveland, Ohio

2200-5-42

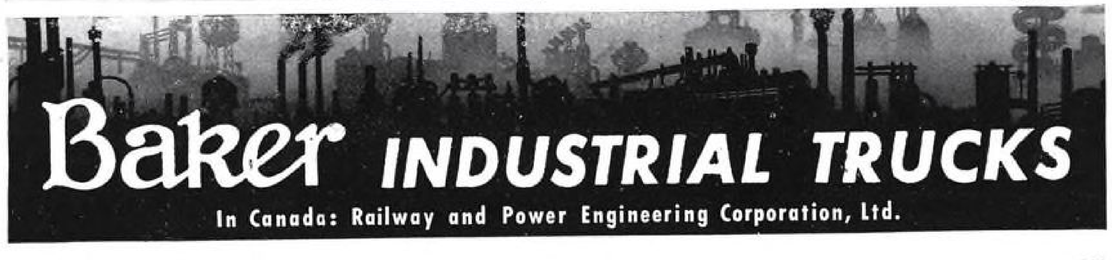

A Miller Message to help conserve War Production Manpower

Better Lighting could have saved this hand!

11,600 industrial workers are killed or injured *every day!* Many of these tragic accidents happen simply because workers cannot see clearly and sharply at all times. Read how MILLER lighting can help you save lives, protect skilled labor, and speed war production in your plant . . .

Last year industry lost 42 million man-days through injuries alone! Think of the staggering cost to the war effort.

Better lighting is one positive way to reduce industrial accident hazards. In one war plant, for example, accidents decreased 11% after a new lighting system was installed. In another the frequency of minor accidents dropped nearly 54% when illumination was increased 18 foot candles.

These figures are from WPB's useful handbook, "Plant Efficiency."

MILLER 50 FOOT CANDLER or 100 FOOT CANDLER can put an adequate, clear-seeing level of fluorescent *daylight* over every working surface in your plant. Watch what that does for worker morale and your safety program!

Or it may be some other type of MILLER lighting . . . incandescent or mercury vapor, for instance...is more ideally suited to your individual needs. MILLER works with all light sources and is in an unbiased position to give you the one best lighting system for your plant and employes.

MILLER engineers are located in principal cities. Ask to have one call for a serious discussion of how better lighting can help you now.

BUY U. S. WAR BONDS

THE MILLER COMPANY
MERIDEN · CONNECTICUT

Pioneers in Good Lighting since 1844

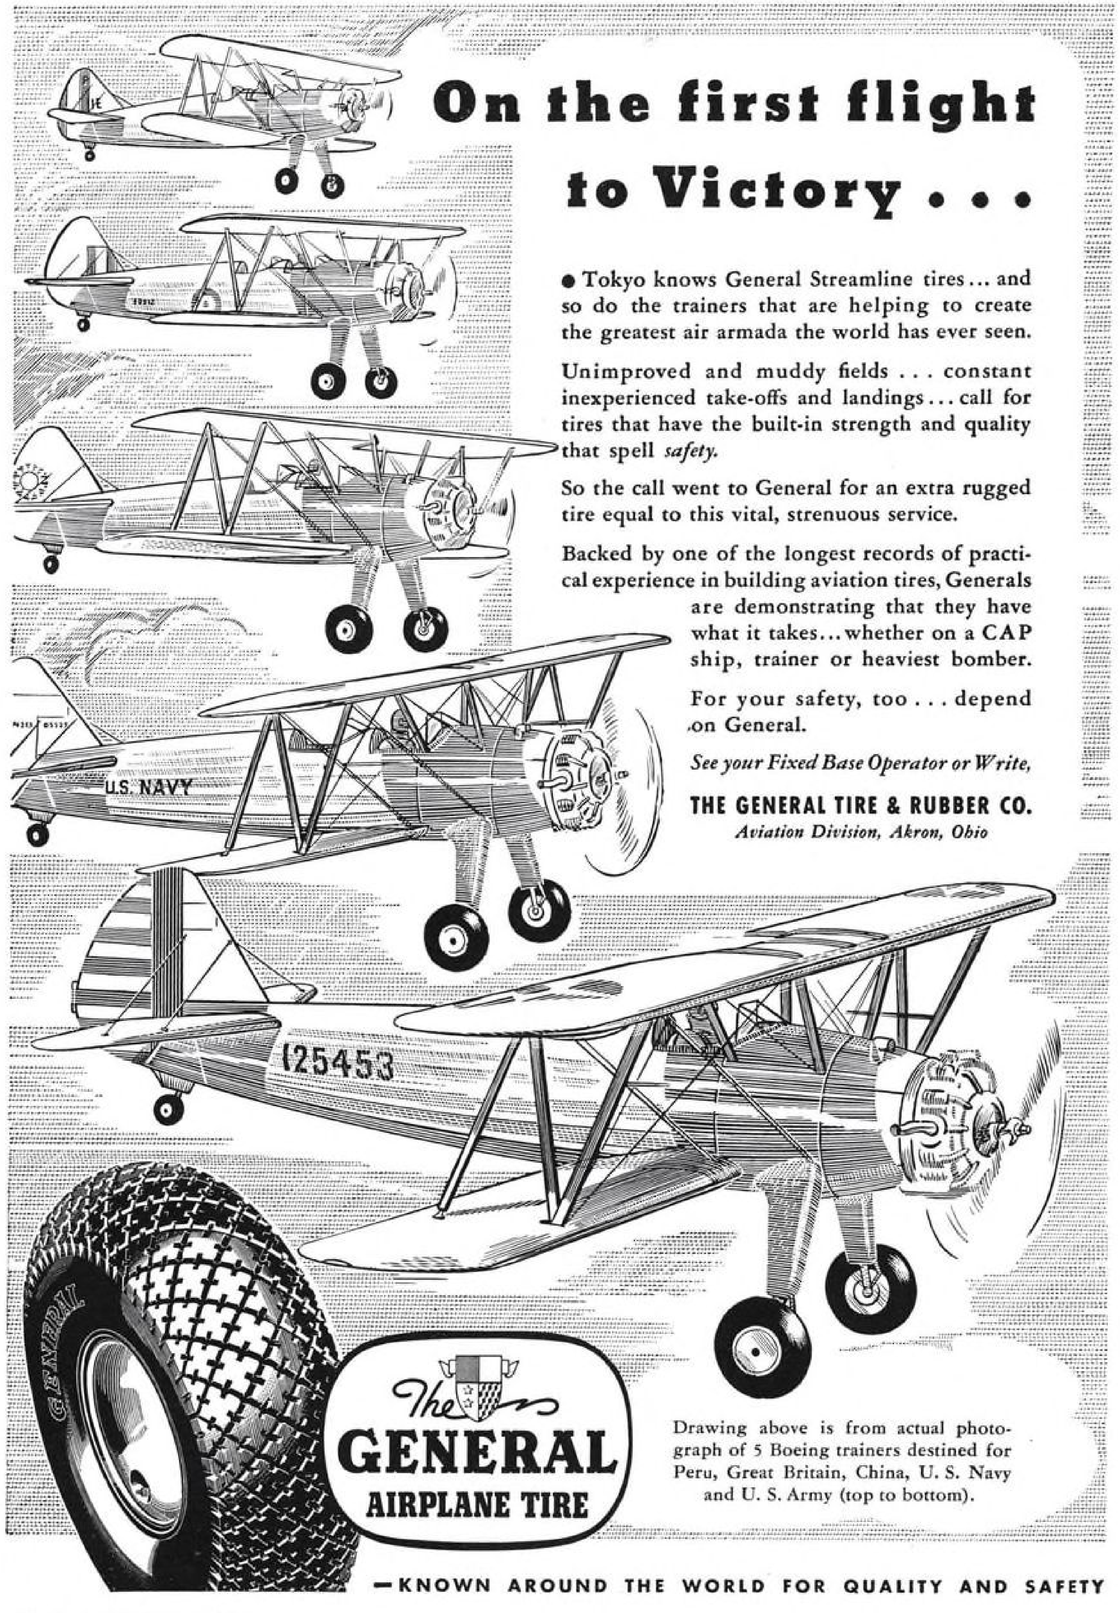

On the first flight to Victory . . .

● Tokyo knows General Streamline tires... and so do the trainers that are helping to create the greatest air armada the world has ever seen.

Unimproved and muddy fields . . . constant inexperienced take-offs and landings... call for tires that have the built-in strength and quality that spell *safety.*

So the call went to General for an extra rugged tire equal to this vital, strenuous service.

Backed by one of the longest records of practical experience in building aviation tires, Generals are demonstrating that they have what it takes...whether on a CAP ship, trainer or heaviest bomber.

For your safety, too . . . depend on General.

See your Fixed Base Operator or Write,

THE GENERAL TIRE & RUBBER CO.
Aviation Division, Akron, Ohio

Drawing above is from actual photograph of 5 Boeing trainers destined for Peru, Great Britain, China, U. S. Navy and U. S. Army (top to bottom).

The GENERAL AIRPLANE TIRE

—KNOWN AROUND THE WORLD FOR QUALITY AND SAFETY

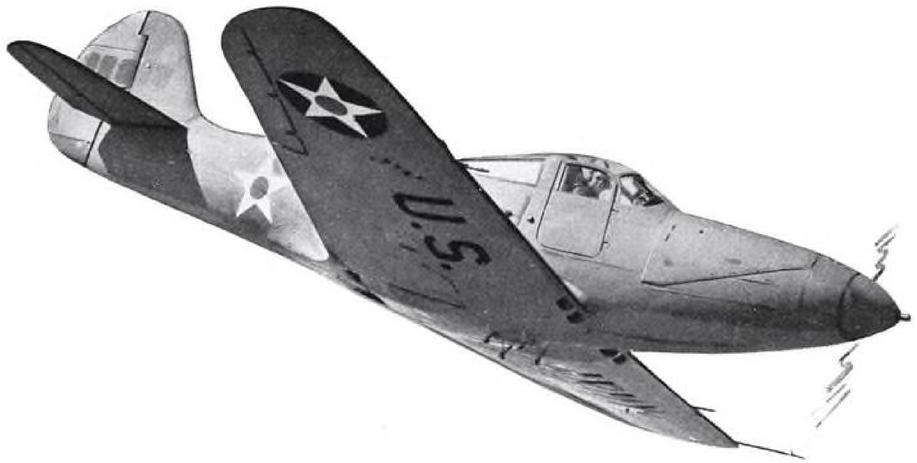



SALUTE TO SKY SLUGGERS

Sinclair salutes Bell Aircraft Corporation, honored by an Army-Navy "E" for excellence in production.

Excellence in performance merits another salute — this one to Bell Airacobras slugging their way with cannon-fire, speed, and maneuverability to mastery of the air.

For safe lubrication of engines in strenuous flight tests before Airacobras are passed for military service, Bell uses Sinclair Pennsylvania Motor Oil.

FOR FURTHER INFORMATION ABOUT SINCLAIR PENNSYLVANIA AND OTHER SINCLAIR AIRCRAFT LUBRICANTS WRITE

SINCLAIR AVIATION OILS

SINCLAIR REFINING COMPANY (Inc.)

2540 West Cermak Road, Chicago · 10 West 51st Street, New York City · Rialto Bldg., Kansas City · 573 West Peachtree Street, Atlanta · Fair Building, Ft. Worth

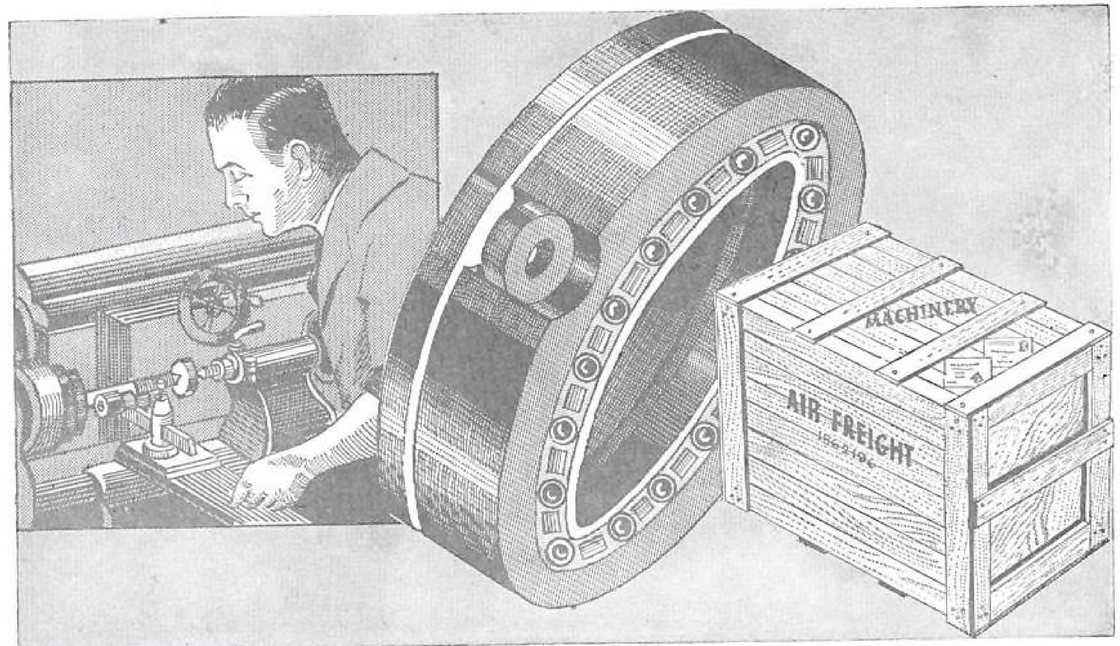

One decision you can make today ...about tomorrow

Take a look at what we're doing today: rushing out aircraft armament; Automatic Bomb-release Racks, Cannon parts, Bomb-release Shackles and hardware for all types of military planes... all to exacting specifications... on a 24-hour, 7-day production basis... and delivering on time with the lowest percent of rejections! (And mind you, we were doing this long before Pearl Harbor.)

Now take a look at tomorrow... when the democratic peace comes and the competitive struggle for private business begins. When the buyer is going to demand better products at still lower prices, or else. Tough picture, isn't it?

The decision you can make today, about tomorrow, is to plan on using this Spriesch modern war production ability to insure your survival and leadership in the battle for business.

We shall be glad to work with you. Our business is metal fabrication, special or production work, tools, dies or parts to your order.

Plan now with us for tomorrow.

Joseph J. Cheney, President.

Write Us: "Send Brochure"

In it is pictured our complete facilities. Please use your business letterhead.

★ WE OFFER ★

INGENUITY

and extensive facilities to produce intricate or simple designs —experimental pieces or mass production—complete assemblies or parts with maximum accuracy, minimum waste at reasonable cost.

AFTER VICTORY

Spriesch ★

Established 1923

TOOL & MANUFACTURING CO., Inc.

10 Howard Street **Buffalo, New York**

AD NO. 10

Safe landings through the eyes of science

That's the last hazard
Of a bombing raid . . .
After the flak
And the enemy fighters . . .
Putting your ship safely down
On the home field.

Imagine a pilot in the last war
With the weather against him.
He knows his base
Is somewhere below
Shrouded in darkness and fog
But must circle and circle his plane
In black desperation
Hoping the crash won't be too bad.

Now Uncle Sam's pilots
Can head home
And set their ships down
In weather as black as a witch's hat.

Modern radio equipment
For instrument landings
Is designed, developed
And manufactured
By I. T. & T. associate companies.

The broad peacetime experience
Of I. T. & T.
In the field of communications
Is proving its value
In time of war.

INTERNATIONAL TELEPHONE AND TELEGRAPH CORPORATION *67 Broad St., New York, N. Y.*

I T&T

Manufacturing Associate: FEDERAL TELEPHONE AND RADIO CORPORATION
formerly operating under the names: International Telephone & Radio Manufacturing Corporation *and* Federal Telegraph Company

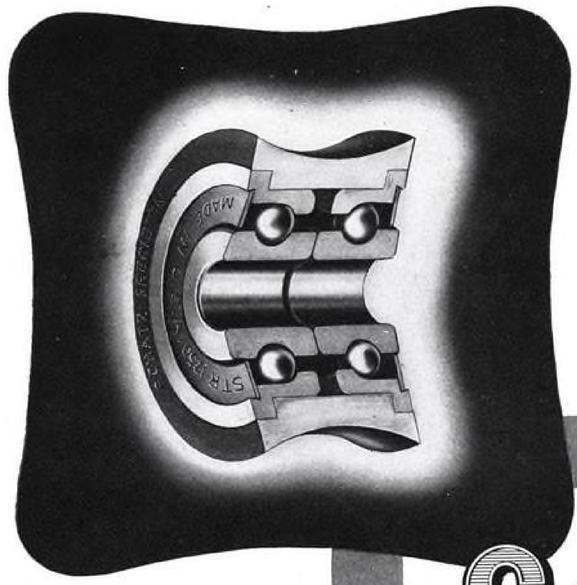

SCHATZ
Precision
AIRCRAFT
BALL BEARINGS

SCHATZ CONTROL BEARINGS MEET THE MOST EXACTING ENGINEERING SPECIFICATIONS • PROVIDE SAFE, DEPENDABLE CONTROL • STRONG • TOUGH • ACCURATE BALL BEARING EFFICIENCY PLUS THE SCHATZ REPUTATION FOR PRECISION MANUFACTURE KNOWN AND RECOGNIZED WHEREVER BALL BEARINGS ARE USED •

THE SCHATZ MANUFACTURING CO.
U. S. A.
REPRESENTATIVES LOCATED AT
Detroit: 2640 Book Tower • Chicago: 902 S. Wabash Ave.
Cleveland: 402 Swetland Bldg. • Los Angeles: 5410 Wilshire Blvd.

Triplett & Barton

ABOVE—NEW PORTABLE X-RAY TRAILER UNIT X-RAYING PROPELLER OF LOCKHEED HUDSON. INSET—BATTERY OF X-RAY MACHINES AT A TRIPLETT & BARTON LABORATORY.

An ounce of prevention

In field or factory, an ounce of prevention is and always will be worth a pound of cure. Triplett & Barton's latest verification of that old adage is the portable X-Ray trailer unit—a laboratory on wheels. Completely equipped with dark-room and refrigeration for constant temperature, this 250 KV unit has hydraulically operated moving parts and has full range between heights of eighteen inches and eight feet.

The mobility of the trailer X-Ray makes it extremely versatile—for parts too large for the laboratory—for assembled units, as tanks or ships or airplanes, where countless hours of dismantling and re-assembly can be saved. Triplett & Barton is proud to offer another "first" in the field of metal X-Ray—another aid available to any war production plant for cutting loss of time. Present your metal problems to Triplett & Barton, X-Ray pioneers.

TRIPLETT and BARTON, Inc.

WICHITA, KANSAS ★ BURBANK, CALIFORNIA ★ SEATTLE, WASHINGTON

SAA

On the job . . . *at every take-off*

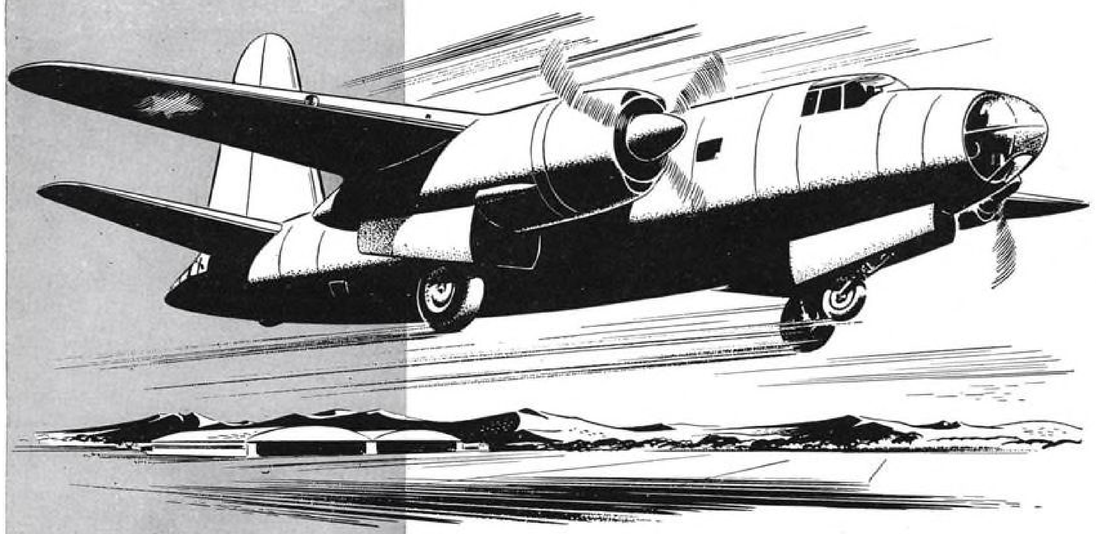

From the list of Simmonds engineered aviation accessories, the following are in wartime production for the fighting forces.

Simmonds-Corsey
FLEXIBLE PUSH-PULL CONTROLS

CHRONOMETRIC RADIOSONDES

Simmonds-Benton
SPARK PLUGS

Simmonds-Olaer
HYDRAULIC ACCUMULATORS

Simmonds-Hobson
INDUCTION PRESSURE (BOOST) CONTROLS

Simmonds-Prentice
ROD ENDS

Simmonds type
COWLING AND PANEL FASTENERS

TA CLIPS AND RINGS

QUICK DISCONNECT UNITS

AN ever growing number of America's hard-hitting fighting planes are equipped for efficient performance with Simmonds products. One or more items from the list of Simmonds aviation accessories is in action on world-wide fighting fronts with every American bomber in the air today.

Simmonds is proud that all its manufacturing experience and facilities are enlisted in the battle for Freedom. It takes pride, too, in the increased demands for the high quality, performance-proved products which it manufactures in quantity. Until Victory is ours, Simmonds precision-made parts will be "on the job at every take-off".

SIMMONDS AEROCESSORIES INC.

10 ROCKEFELLER PLAZA, NEW YORK, N. Y.

Mutual Home Building, Dayton, Ohio • 6253 Hollywood Blvd., Hollywood, Calif.

FILTRATION A 3 SERVICES PROBLEM

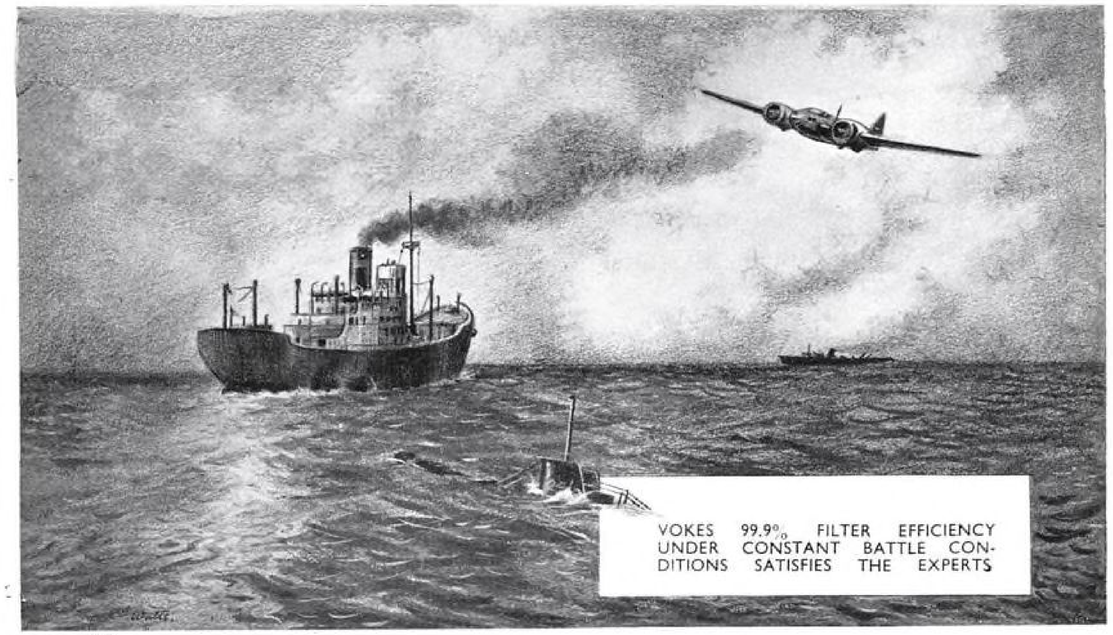



WE hear a lot of "talk" about man power naturally, because it concerns the people. But the engineer experts of the services have their own special problem, engine power. Aero-engines in their thousands, the mighty engines for submarines, auxiliary motor craft and mechanised units of the Army, each and every one has to be kept "fighting fit." That is why the filtration of air, oil and fuel oil to these engines is of such vital importance, because on purity of air, oil and fuel oil for engines depend power and speed. Our organisation is working to capacity to provide Vokes Air, Oil and Fuel Oil Filters to all branches of the services. H.M. and Dominion Governments approve and adopt Vokes Filters. Their 99.9 per cent. standard of filtration efficiency is unvarying, and has been tried and tested out under actual fighting conditions. Like everything connected with the fighting forces, Vokes Filters don't half do the job, but do it thoroughly.

1. Vokes High Pressure Oil Filters for Aircraft.
2. Vokes Tank Oil Bath Air Cleaner.
3. Vokes Air Filter for Aero-Engines.
4. Vokes Twin Oil Filters for Diesel Engines.

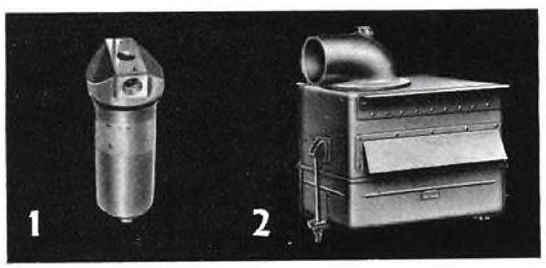

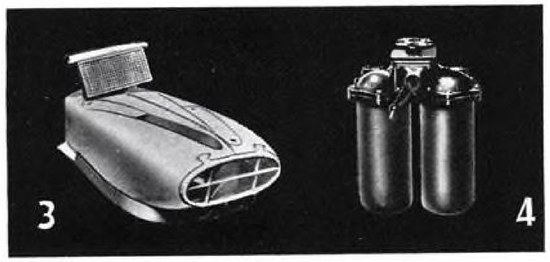

VOKES VOKES LIMITED · FILTRATION EXPERTS

THE ARTHUR S. LEITCH CO. LTD.,
1123 BAY STREET, TORONTO, CANADA
E. CANTIN, 101 PARK AVE., NEW YORK

Scrap salvage is a vital factor in the war effort. To be fully effective a scrap program must include methods for segregating and conserving critical alloying elements so urgently needed in the construction of tanks, guns, ships and planes.

Ferrous and non-ferrous metal scrap should be collected in separate containers at the machine where they are generated. Each class of high-speed tool steel and each type of constructional alloy steel should likewise be kept separate so that the alloy content can be returned to service.

Remember, — alloy scrap which is segregated, classified and labeled according to type and composition is a vitally important commodity today—and urgently needed to augment primary supplies of Nickel, molybdenum, tungsten, etc.

The metallurgical experience of our technical staff is available to aid you in these and other phases of metal salvage.

KEEP SCRAP MOVING INTO WAR PRODUCTION!

THE INTERNATIONAL NICKEL COMPANY, INC. 67 WALL STREET NEW YORK, N. Y.

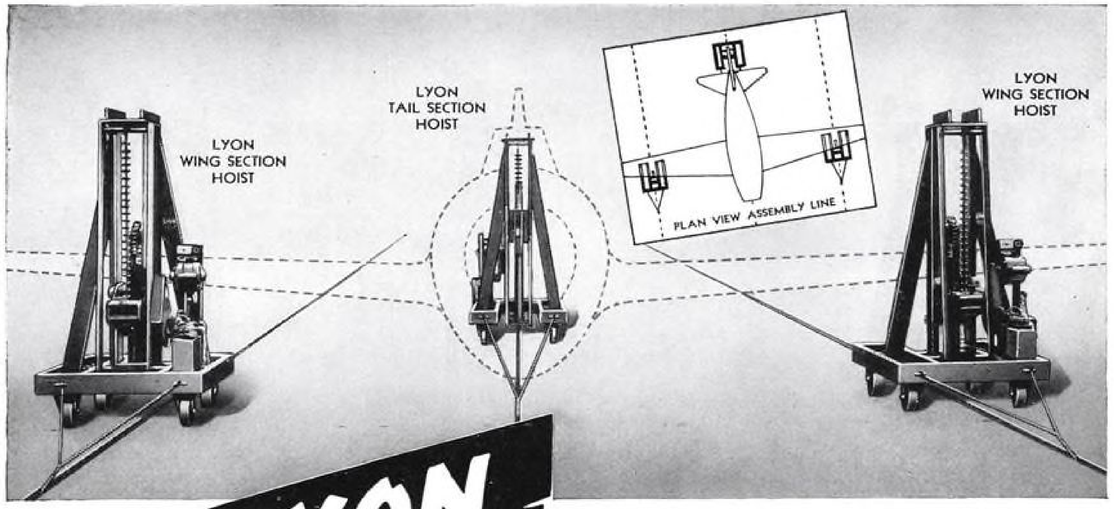

LYON PORTABLE HYDRAULIC HOISTS . . . for elevating and lowering airplanes on the assembly line.

THERE'S A LYON AVIATION UNIT to fit every purpose in

★ PRODUCTION
★ MAINTENANCE
★ OPERATIONS
★ GROUND CREW

. . . MATERIAL HANDLING!

For each plane there are three portable hoists—one for EACH wing section—one for the tail section.

Whatever your requirements may be—LYON MATERIAL HANDLING EQUIPMENT will solve your problems better—faster—more efficiently! The superiority of Lyon Hydraulic operation in lifting power, reliability, and easy, economical action is proved in hundreds of installations already on active duty throughout the aircraft industry.

Numerous sets of LYON Portable Hydraulic Hoists, pictured above, were built for a large airplane manufacturer to change the height of planes in the final assembly line. They are used also in hangars for lifting planes to convenient servicing positions. We are also prepared to build units such as Airplane Spotting Dollies, Supercharger Positioning Tables, and Cargo Loading Trailers, to meet particular requirements.

Our engineers, backed by long experience with every type of material handling problem, are well qualified to cooperate with you. If there is a particular stumbling block in your material handling procedure, let Lyon Engineers analyze it, and submit recommendations without obligation.

Send for our comprehensive booklet—"The Answer to Production and Servicing Problems in the Aviation Industry"—it's free, and it will show you the way to simplified material handling The Lyon Way!

LYON-RAYMOND CORPORATION 195 MADISON STREET, GREENE, N. Y.

ARE YOU SHORT OF TECHNICIANS . . . MACHINE TOOLS . . . TESTING EQUIPMENT?

The United States Testing Company, Inc., offers to the airplane industry specific assistance in meeting the heavy demands of the war program. If the following phases of Engineering, Research, and Testing meet with your requirements, get in touch with us immediately:

★ Our completely equipped machine shop is open for sub-contracts in the manufacture of special parts, tools, and gages.

★ We operate special equipment for strength tests from a hair to a girder . . . 1 gram to 200,000 lbs.

★ We are equipped to make precision measurements on gages, tools, etc., down to 1/100,000th of an inch.

★ Our staff of engineers is available for consultation or shirt-sleeve work in solving research and design problems.

★ We are equipped to test all raw materials and accessories used in airplane manufacture.

★ We have a special service on Plastics . . . comprising physical and chemical tests as well as a consulting service for developing new uses and products.

★ We are equipped for heat transmission measurements . . . electrical measurements . . . sound transmission measurements . . . and efficiency and calibration tests on all types of instruments and mechanical appliances.

When making inquiries, please indicate the specific problems with which you are faced. This will enable us to give you the pertinent information you require concerning our services, without delay.

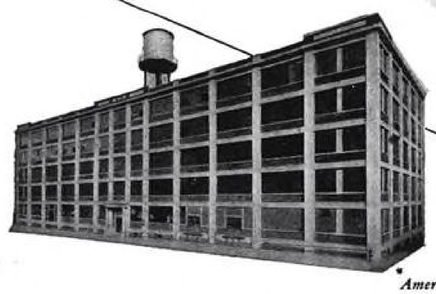

Member of A. C. C. L.*

American Council of Commercial Laboratories

UNITED STATES TESTING COMPANY, INC.

ESTABLISHED 1880

HOBOKEN, NEW JERSEY

PHILADELPHIA CHICAGO WOONSOCKET GREENSBORO NEW YORK

Only a Small Part in the

BOMBING OF TOKIO...

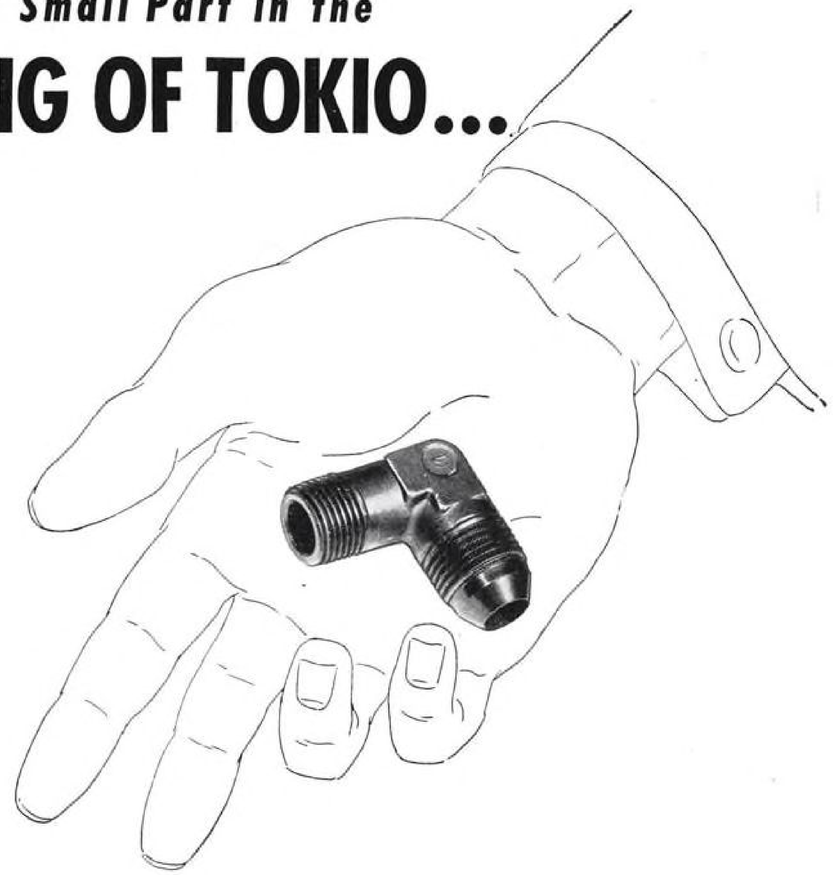

...But Deadly Accurate!

Every bomb that drops true to the target at Tokio represents a collaboration by thousands of Americans—engineers and workers as well as air force personnel—Dole engineers, skilled men and women included.

Not all the accuracy is obtained by arms or ammunition—not by a bomb sight! Hydraulic control lines to bomb bays, wing flaps, landing gear—Tight joints in gas and oil lines under stress in long flights—These and their Dole Valves and Fittings play their part in getting the plane into split-second bombing position.

The machined and inspected accuracy of the Dole elbows, unions, cocks and tees contributes to the total accuracy of the plane—contributes importantly when you consider their uniformity as produced in millions.

THE DOLE VALVE COMPANY
1901-41 Carroll Avenue, Chicago, Illinois
OFFICES: LOS ANGELES • DETROIT • PHILADELPHIA

To Air Corps, Navy and AN Specifications

DOLE Aircraft Valves & Fittings

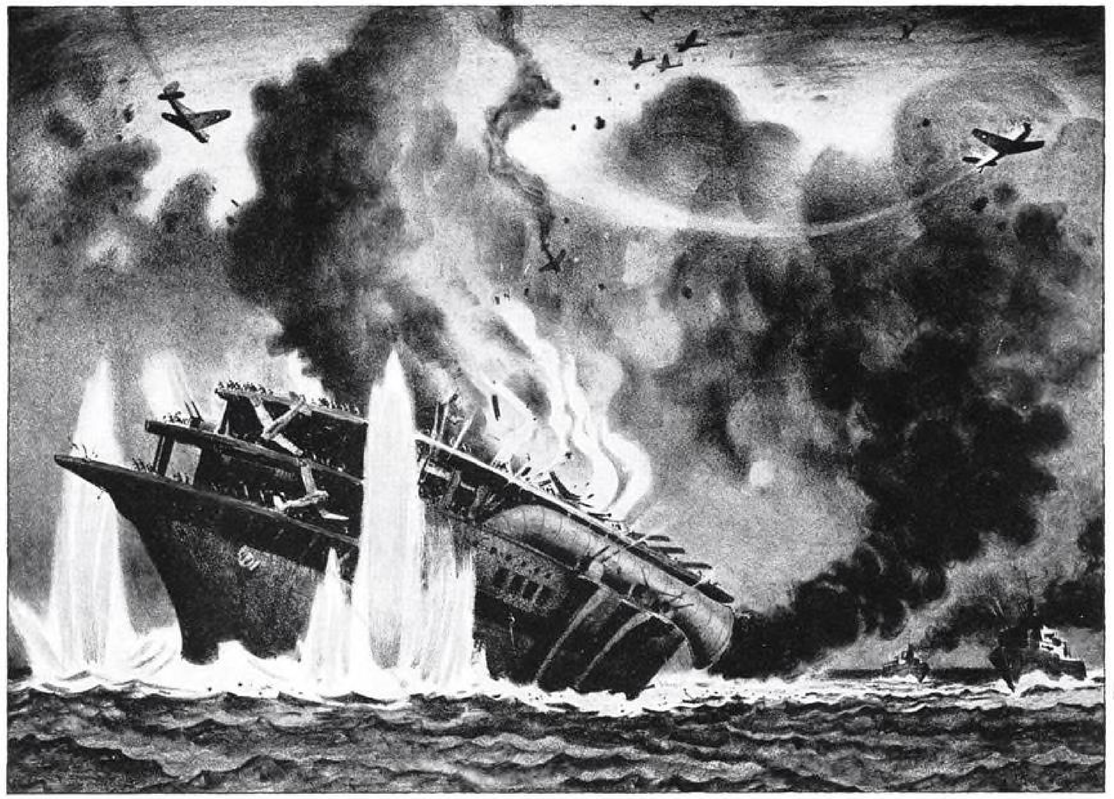

AMERICAN BOMBERS SINK JAP CARRIERS!

Pictured here is a Japanese airplane carrier, with its characteristic horizontal funnel, after a direct hit by an American bomber.

"More planes plus more carriers" is America's answer to the Axis powers. As the accumulated force of America's equipment and training become felt—we shall begin "to hit the enemy and hit him again."

As one of the largest producers and distributors of cotton fabrics for an all-out war effort, Wellington Sears Company has turned over the full facilities of its 18 mills to Army, Navy and Air Force needs.

B★A★30 AIRPLANE CLOTH and WARWICK BALLOON CLOTH both play an important part in the equipment and protection of our armed forces. Therefore, these fabrics are now available only on a priority basis and in accordance with the provisions of General Preference Order M-197.

WELLINGTON SEARS COMPANY • 65 Worth Street, New York, N. Y.

Cottons FOR ~~DEFENSE~~ *OFFENSE*...WELLINGTON SEARS FOR *Cottons*

Things You Can Count on . . . .

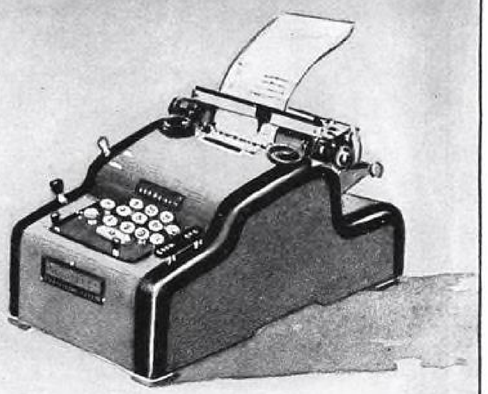

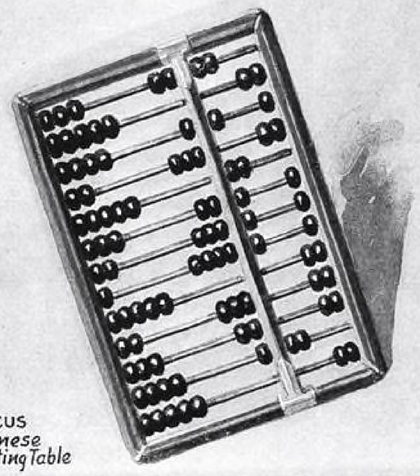

ABACUS
A Chinese Calculating Table

. . . . and year after year aircraft manufacturers count on FLIGHTEX for fabric that's lighter, stronger, smoother — that surpasses U. S. Army and Navy specifications.

Each year more manufacturers buy more FLIGHTEX than any other airplane fabric.

World's Premier Airplane Fabric FLIGHTEX FABRIC

FLIGHTEX

SUNCOOK MILLS — 40 Worth St., New York

Export Representative—Aviation Equipment & Export, Inc. 25 Beaver St. N. Y. Cable Address—"Aviquipo"

Leading Manufacturers of Fabric and Tapes for the Aircraft Industry

RESALE DISTRIBUTORS

AIR TRANSPORT EQUIPMENT, INC., Roosevelt Field, Garden City, N. Y.
INTER CITY AIRLINES, East Boston, Mass.
THE AIRCRAFT STEEL & SUPPLY CO., Wichita, Kan., Fairfax Airport, Kansas City, Kan., Dallas, Tex.
SNYDER AIRCRAFT CORP., 5036 West 63rd St., Chicago, Ill.
LEAVENS BROS. AIR SERVICE, LTD., Barker Airport, Toronto, Canada.
VAN DUSEN AIRCRAFT SUPPLIES, Wold-Chamberlain Airport, Minneapolis, Minn., and Chapman Field, Waterloo, Iowa.
KARL ORT, York, Pa.
AVIATION SUPPLY CORP., Hapeville, Ga.
PACIFIC AIRMOTIVE, Burbank, Cal., Oakland Airport, Oakland, Cal.

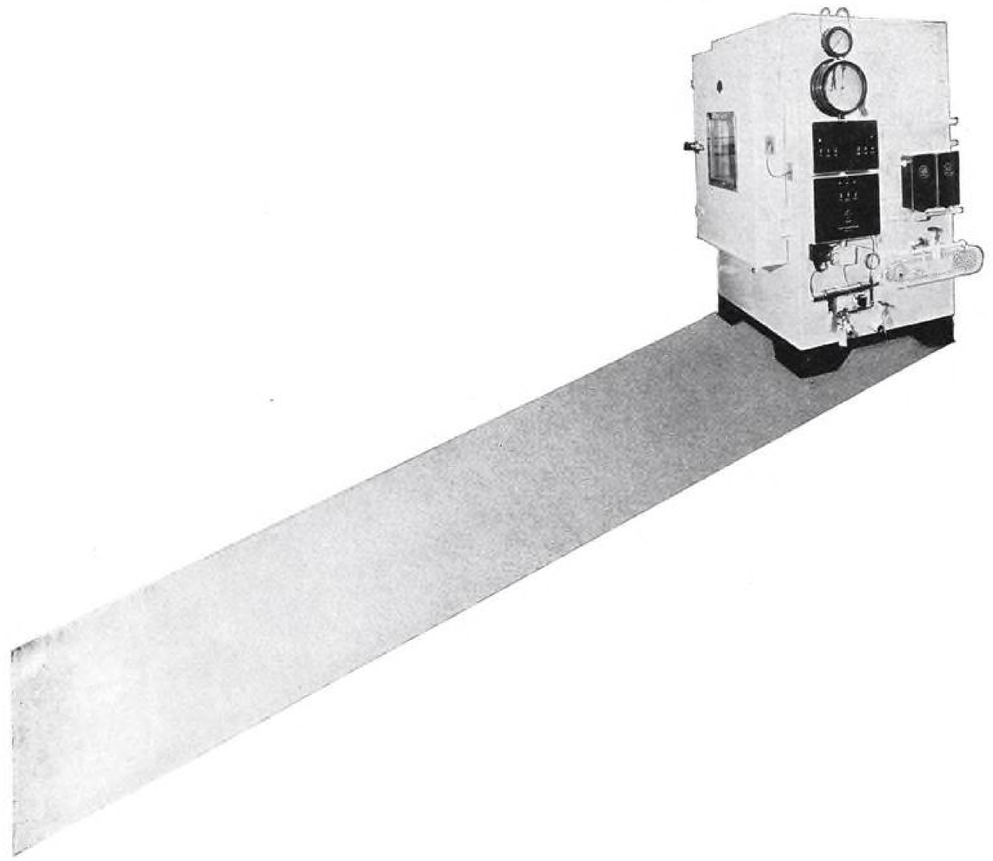

TESTING the stamina of materials and instruments in the "Tenneyzphere" High Altitude Chamber removes the last vestige of guesswork.

Standard range of temperatures run from —40° to 150° Fahrenheit. (Special units test from —90° to 320° Fahrenheit.)

Observation ports permitting full visibility are sealed to prevent interior condensation. The interior is scientifically air-conditioned.

To make mechanical adjustment of the apparatus under test, small rotating shafts are installed. These are manually turned from the outside and studs extend through suitable packing to keep them airtight.

These cabinets meet the test requirements of all U. S. Government Agencies: Army Signal Corps, Navy Bureau of Aeronautics, National Advisory Committee for Aeronautics.

For illustrated booklet describing "Tenneyzphere" High Altitude Chambers, Constant and Variable Temperature Baths, Humidity Chambers, and All-Weather Rooms, with tables giving specifications for many important installations write Dept. A-12

TEN NEY ENGINEERING INCORPORATED

TENNEY ENGINEERING, INC.

8 Elm Street, Montclair, N. J.

The Eagle Strikes

THE American Eagle, when aroused, is a sudden whirl of fury as it strikes with killer claws.

The American people and their government are fully, fiercely aroused today. They are fighting this toughest of all wars with every nerve and sinew . . . ready to wreak destruction on the enemy.

The Army Air Transport Command, The Naval Air Transport Service, and The United States Maritime Commission have organized and are directing the most gigantic transportation job in world history. Due to their combined efforts, the greatest fleets of aircraft and ocean-going vessels ever assembled are now operating to all corners of the globe — on a scale that defies imagination.

American Export Airlines and American Export Lines, with giant four-engined flying boats and new fast cargo ships, are doing their bit in this gigantic transportation effort.

American Export *Lines Airlines*

25 BROADWAY • NEW YORK

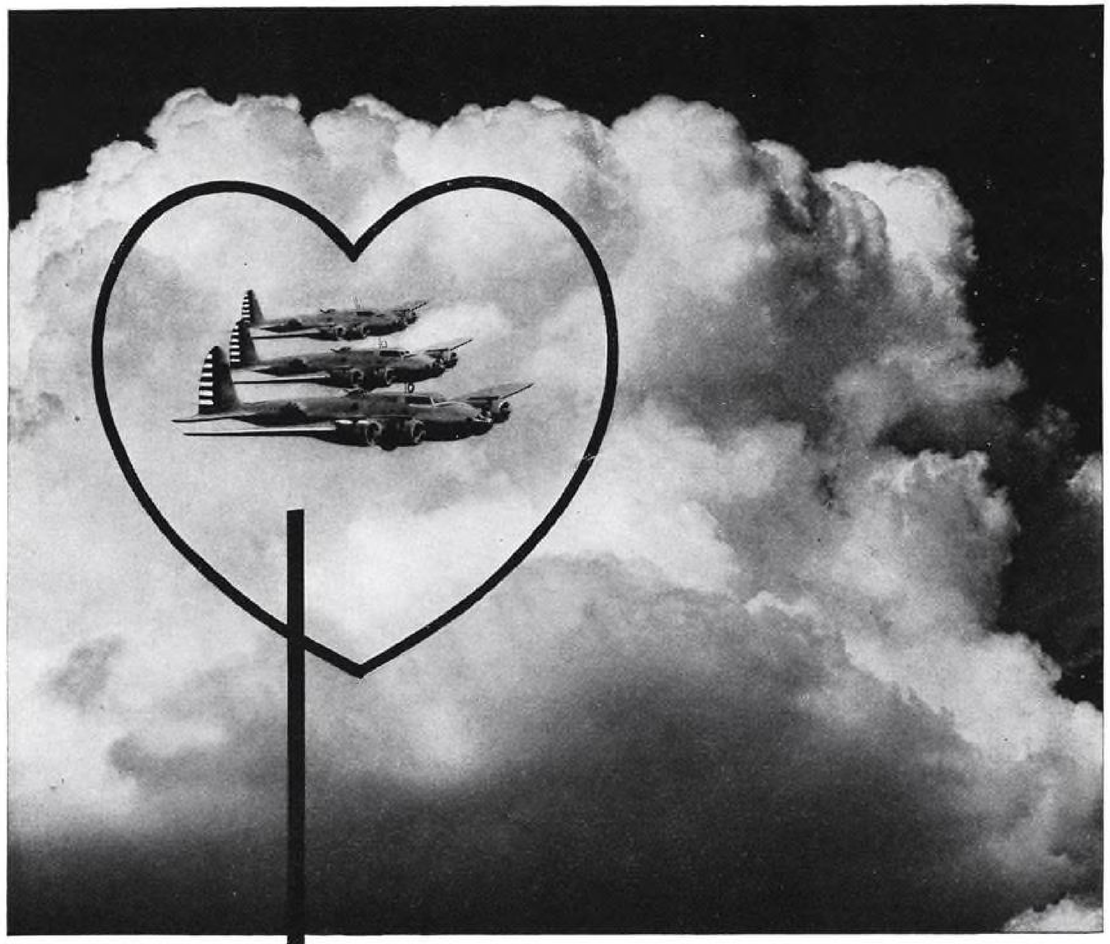

365 "Heart-Beats" a second!

★ In today's giant aircraft motors a pair of contact points meets, passes an electrical charge and "breaks" apart again . . . three hundred and sixty-five times every second. That's twenty-one thousand nine hundred times every minute!

★ This is the "normal pulse" required to maintain maximum efficiency of the huge throbbing engines of Uncle Sam's war-birds.

★ For this gruelling job, America's leading aircraft magneto manufacturers specify Wilco AERALLOY CONTACT POINTS. Why? Because they are the result of more than 25 years of research in the development and micro-precisioning of precious and semi-precious metals for industrial applications. Army, Navy and commercial aircraft equipped with AERALLOY CONTACT POINTS depend on AERALLOY for unfaltering performance.

★ Another Wilco product widely used in aircraft is Wilco THERMOMETAL (Thermostatic Bi-Metal) for engine oil temperature controls, compensation in voltage regulators and in other aircraft precision instruments.

★ For full information about AERALLOY and Thermostatic Bi-Metals write today for free booklet: "Wilco Blue Book of Thermometals and Electrical Contacts."

THE H. A. WILSON COMPANY
105 Chestnut St., Newark, N. J.
Branches: Chicago ★ Detroit

AERALLOY REG. U.S. PAT. OFF.

WILCO ELECTRICAL CONTACTS and THERMOSTATIC BI-METALS

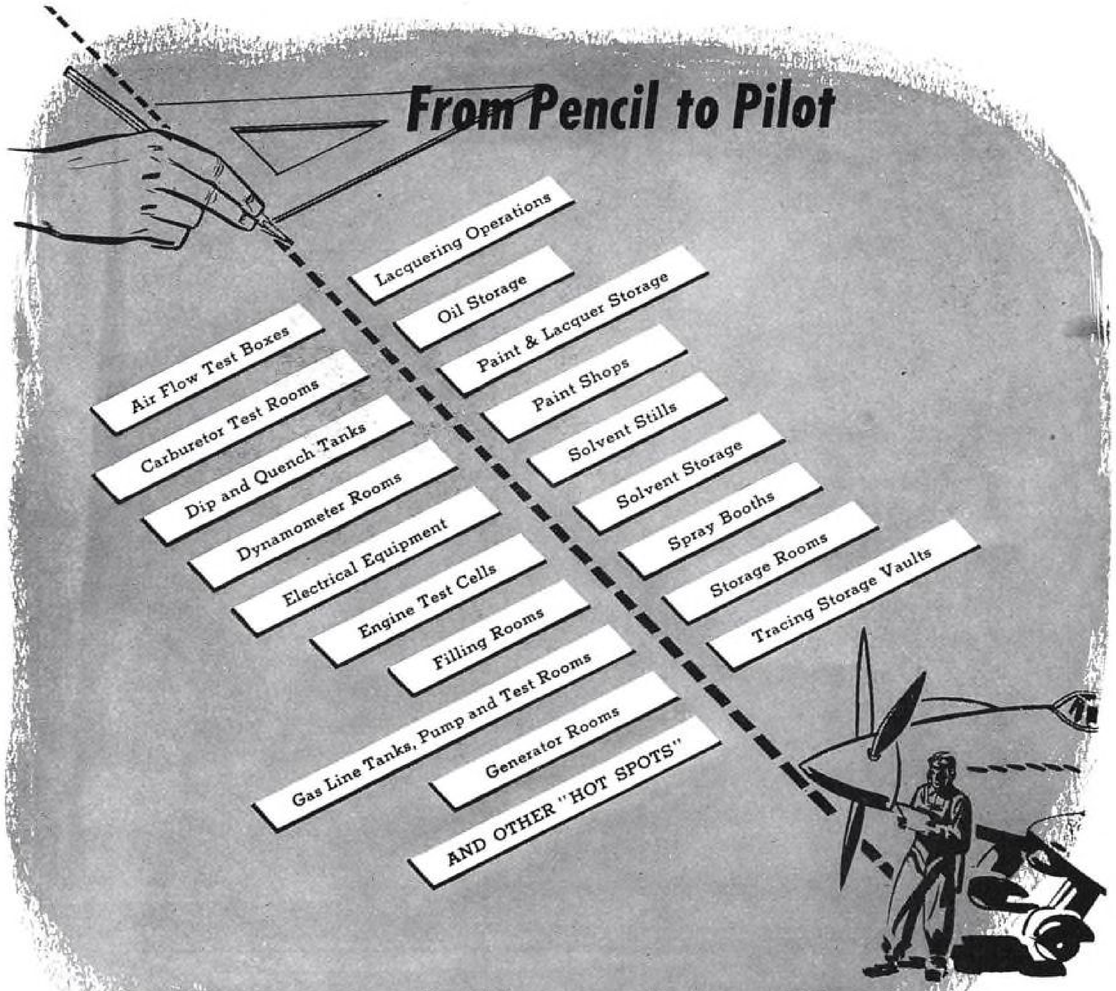

Engineered Hazard-by-Hazard Against Fire Loss

In any single plant in the aviation industry many fire hazards may be found. All are different—yet readily controllable by application of *cold carbon dioxide*—Cardox. No two applications are apt to be identical in size, local conditions, relation to the rest of the plant, or actual fire danger. That's why the startling mastery of CO_2 over combustion must be *engineered, hazard-by-hazard*, for complete and positive systems of plant protection.

Cardox installations pipe low temperature CO_2 *as needed*, to *any one* of many outlets, from a central supply as large as 100 tons or more. Automatic controls, alarms and timing instruments are used in engineered combinations for pre-determined results.

In supplying an utmost in plant protection for today's critical needs, Cardox engineers offer a full scope of vital experience. Their performance in aviation industries is of special value. Contact them for an estimate of what Cardox can do for your plant. Write for Bulletin No. 3122.

CARDOX

NON-DAMAGING FIRE EXTINGUISHING SYSTEMS

CARDOX CORPORATION • BELL BUILDING • CHICAGO

District Offices in: New York • Detroit • Pittsburgh • Cleveland • Atlanta • San Francisco • Los Angeles • Seattle

BRAND NEW BOOK *by an international authority!*

An absolutely unique aviation dictionary!

JORDANOFF'S *ILLUSTRATED* AVIATION DICTIONARY

Sample Page (One-Sixteenth Actual Size)

OVER 2000 DEFINITIONS • OVER 2000 ILLUSTRATIONS

Over 2000 aviation terms *doubly* defined—by clear, accurate text and by technically correct, scientifically exact drawings that explain precise meanings at a glance!

Now you can know the meaning of every aviation term. More important, you can see just what the object represented by the term looks like, how it acts, what its basic function is. At last, the author of the most successful books in aviation gives you an entirely new kind of dictionary which tells you at a glance just what you want to know about more than 2000 aviation terms.

Absolutely Accurate. No matter how well-versed you are, you can't possibly know more than a fraction of the terms defined and illustrated in Jordanoff's book. Himself one of the greatest authorities, Jordanoff gathered a staff of over a score of specialists and draftsmen to prepare this dictionary. He consulted at length with many of the best-known men in aviation. He drew on the knowledge and experience—willingly given—of some of the largest, most important aviation manufacturers. *His book is in a real sense the product of the experience of the entire aviation industry.* Every definition, every drawing has been triple-checked. You know that it is accurate to the minutest detail.

Covers every field — Needed by everyone. Drawing on his vast experience as a pilot, aeronautical engineer and writer, Jordanoff covers every phase and every field of aviation. Here are terms from meteorology, aviation engineering, aircraft manufacture, military aviation, ground work. Here are new slang terms in use by American and British flyers. Here are terms you'll need no matter what your connection with aviation. From the president of the largest aviation manufacturing firm to the apprentice, this is a book for constant reference use, as necessary as a Webster is to a writer. But that's not all. Dozens who have seen advance copies of the book have read it as they would a novel. The fascinating illustrations, the clear interesting text, have kept them turning the pages for hours. You'll find yourself doing the same. Send no money. See the book without risking a dime. Mail this coupon now.

WHO IS JORDANOFF?

Jordanoff is a name to conjure with in aviation—30 years of aviation experience—pilot in World War I—technical adviser to the great airlines—consultant of the most famous aircraft corporations. And he is the author of the most successful volumes on aviation ever written—*Your Wings, Through the Overcast, Flying and How to Do It, Safety in Flight* and the brand new *The Man Behind the Flight*. Both the British and Soviet air forces have used several hundred thousand of one of his previous books. A total of over 750,000 copies have been sold in this country alone. And we confidently expect, with this book, to surpass the sales of all the others put together. It's a book for *everyone*. It's a book for you.

EXAMINE IT FREE!

HARPER & BROTHERS A-12

49 East 33rd Street, New York City

Please send me a copy of JORDANOFF'S ILLUSTRATED AVIATION DICTIONARY. Within 10 days, I will either send you $3.50 (plus a few cents postage charges) as payment in full, or return the book.

☐ Check here if you enclose $3.50 with this coupon, thus saving delivery charges. Same return privilege.

Name _____

Address _____

City & State _____

Business Connection or reference _____

It took FIFTEEN YEARS to build our World Routes, now so vital to Victory

Every American knows the story of Lewis and Clark—the men who pioneered a trail across the North American continent to the Pacific.

But few Americans know the story of how Pan American Airways—our Merchant Marine of the Air—pioneered skyways across two oceans and down the length of South America in the short space of fifteen years.

In Central and South America, cloud-piercing mountains, hundred-mile swamps and deadly jungles blocked the path. For much of the territory, no accurate maps existed . . . None had been made since the 17th-century charts of the Spanish, Dutch and French explorers.

To equip some of our early airports on the route to the Panama Canal, gasoline had to be carried in *by hand*—long lines of natives, each with a five-gallon tin balanced on his head.

In the Pacific, at Midway and Wake Islands, there were no harbors . . . Construction materials had to be towed through heavy seas, floated over barrier reefs and landed on the beach despite the heavy breakers.

Across Africa also, airports had to be hacked out of jungles and built up on desert wastes. At some points the only available hauling power was furnished by camels . . . Native Africans who had never seen an airplane were employed as artisans.

In Alaska, summer is brief—roads did not exist. Airports had to be built on unfriendly swamp morass or, when it was available, on glacial gravel and sand.

* * *

Today all these routes are playing their part in hastening Victory for the United Nations.

Without exaggeration, it can be said that the existence of facilities pioneered by Pan American has saved the United Nations' aerial war transport many long months.

Wings over the WORLD

PAN AMERICAN CLIPPERS

"Great Accomplishment in the Production of War Equipment"

Upon the men and women making up the organization known as A. SCHRADER'S SON, Division of Scovill Manufacturing Company, Incorporated, has been conferred the Army-Navy "E" Award for "Great Accomplishment in the Production of War Equipment."

We take this opportunity to thank the men of the Army and Navy, our employees and our suppliers, whose efficient cooperation has contributed so much to make possible the honor we proudly enjoy.

Schrader

REG U.S. PAT. OFF.

A. SCHRADER'S SON *Division of Scovill Manufacturing Company, Incorporated* BROOKLYN, N. Y.

SLOTTED ABRASIVE DISC SPEEDS BURRING OF HOLES

Grinds top and bottom edges of holes to true radius — all in one operation

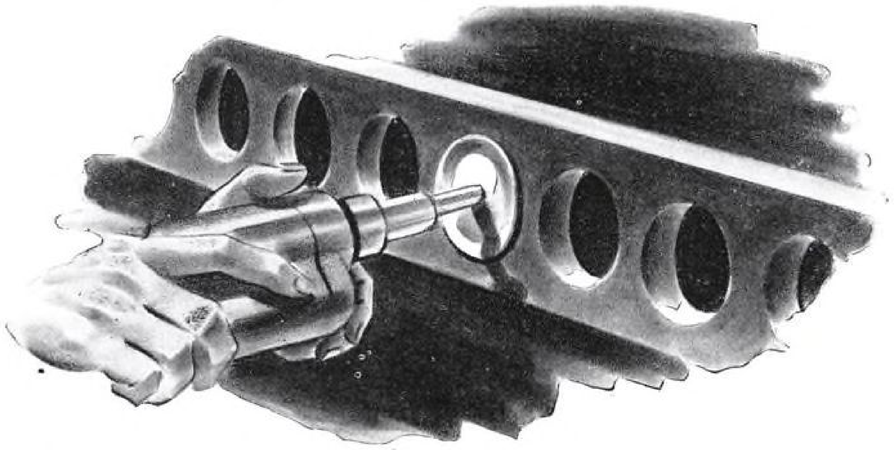

THE job of removing the burr and producing the true radius required on all holes in aircraft engines has been greatly simplified by the introduction of the slotted abrasive disc. Made of Aloxite Brand Electrocoated Aluminum Oxide Metal Cloth, these discs are being widely used for burring and polishing all metal hole edges, from $\frac{3}{8}$" to $5\frac{1}{2}$" in diameter.

The speedy performance of the disc is a result of the flexibility achieved by its slotted design. Using a disc proportionately larger than the diameter of the hole, mounted on a spindle for use in a portable electric or air-driven tool, the operator presses it against the edge of the hole, as in the diagram below. Accommodating itself to the opening, the disc "cones" backward, sanding only the edge of the hole, leaving the flat surface untouched.

If both ends of the holes are to be finished, two discs mounted back to back are used. They are first pushed through and then pulled back against the opposite edge of the hole.

Uses for this new abrasive "Weapon for Production" are many and varied. Such parts as valve rocker arms, connecting-rods, tappet guides, oil holes etc., having openings larger than $\frac{7}{16}$", are typical of its wide application.

In ordering slotted abrasive discs, it is important to select the correct grit for the kind of metal employed and the finish required.

If you care to try a few of these slotted discs we will be glad to send them free of charge. Simply address your request to Dept. A, The Carborundum Company, Niagara Falls, N. Y.

CARBORUNDUM
ABRASIVE PRODUCTS

DIAGRAMS SHOW HOW SLOTTED DISC WORKS

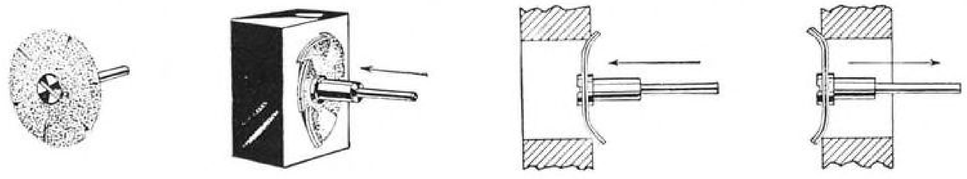

THE CARBORUNDUM COMPANY, NIAGARA FALLS, N. Y.
REG. U. S. PAT. OFF.

Sales Offices and Warehouses in New York, Chicago, Philadelphia, Detroit, Cleveland, Boston, Pittsburgh, Cincinnati, Grand Rapids

(Carborundum and Aloxite are registered trade-marks of and indicate manufacture by The Carborundum Company)

At the beginning of our 10th year

WE EXTEND OUR THANKS TO . . .

. . . the Manufacturers we represent, and to all others in the Aviation Industry, for their cooperation and confidence in us.



. . . our Government clients abroad, who for years have entrusted us with the procurement of their particular needs.

. . . our American and Allied clients, who are currently availing themselves of our diversified procurement experience.

. . . the Aviquipo offices abroad, our vanguard of international reciprocity.

. . . the Banks, whose world-wide facilities have assisted us in the complex problems of foreign finance.

. . . the great Technical Institutions of America, for providing us with competent personnel.

. . . the members of our organization, escaped or missing from countries now overrun by our enemies.

. . . the Aviquipo men in the Armed Forces, whom we will welcome back when Victory is won.

. . . our employees on the Home Front, for their untiring efforts and loyalty.

. . . our energetic representatives, and our friends throughout the world, for their unceasing cooperation these many years.

AVIQUIPO

LINKING AMERICAN MANUFACTURERS WITH FOREIGN AND DOMESTIC MARKETS

AVIATION EQUIPMENT & EXPORT, INC. 25 Beaver Street, New York, N. Y., Cable AVIQUIPO

Give the Lame Ducks a Chance to Fly Home

If an aircraft electric motor burns out, the plane is likely to be a gone goose and its crew lost. At the least, the plane is out of service until a spare motor can be obtained and installed.

But if you use aircraft electric motors that have built-in Klixon Protectors, you get an entirely different story. Those motors can't burn out. If a jam occurs and a motor is overloaded to the danger point, the built-in Klixon Protector automatically cuts the motor off the line. The motor cools to a safe operating temperature, then tries again, automatically. It keeps working on an "on" and "off" basis — "lame duck" fashion — until the jam is eliminated and overload conditions are corrected.

Any type of low voltage D. C. motor — up through 30 volts — can be supplied with built-in Klixon Protectors. Insist on this protection. Ask your supplier today.

KLIXON

SPENCER THERMOSTAT COMPANY • ATTLEBORO, MASSACHUSETTS

use TRADE Verson MARK Press Brakes

for Forming and Multiple Punching Intricate Aircraft Shapes

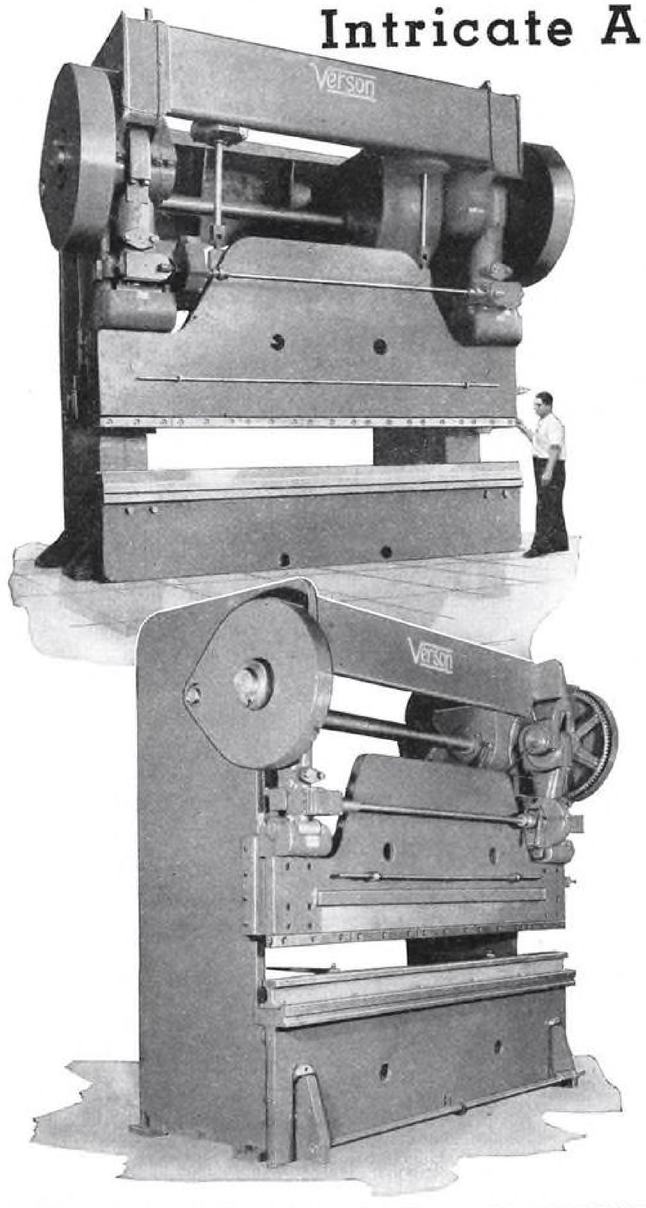

VERSON Press Brakes are designed for jobs demanding the most in precision and production performance. Accurate bends and maximum punch and die life are assured through their balanced distribution of steel plate. They are built by the originators of all-steel welded construction in the manufacture of punch presses—built to include many features that allow faster, better and more economical production.

Verson Press Brakes, ranging in capacity from 6' x ¼" up to 14' x ½", are available to the aircraft industries on reasonably quick deliveries.

•

Send for your copy of the new aircraft edition of the Verson Die Manual.

•

VERSON ALLSTEEL PRESS CO.

9311 South Kenwood Avenue • Chicago, Illinois

POWER PRESSES • HYDRAULIC PRESSES • CLUTCHES

FORGING PRESSES • PRESS BRAKES • DIE CUSHIONS

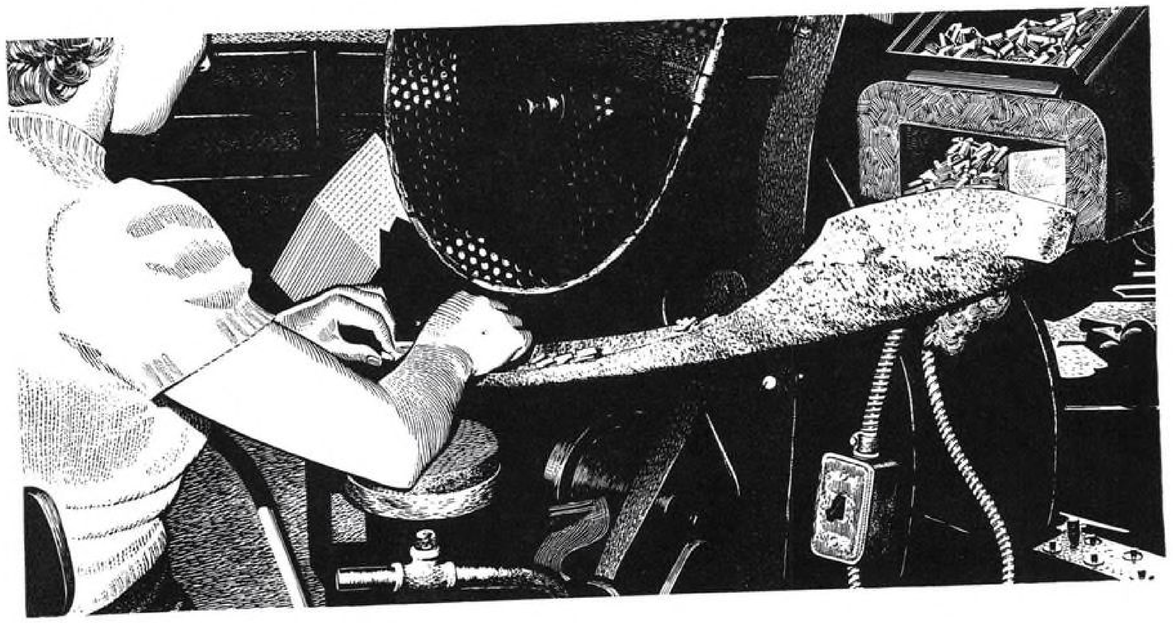

How Sally used up a copper mine

LOOK at the picture carefully. See that elbow-rest under Sally's arm?

It is significant. In fact, it's a humble sermon on war production.

Understand the existence of that arm-rest and you understand one of the basic reasons why, in less than seven months after war-conversion, American industry is hollering for Washington to provide more copper and other basic raw materials.

► Before Sally got her arm-rest, she reached over to a box, picked up a tiny part for an airplane instrument and placed it in the machine . . . Now the supply box is tilted and constantly jiggled, so that the parts flow to her finger-tips. With each motion Sally saves a fraction of an ounce of energy and half a second of time.

Without such tiny savings of time and effort, America's 20,000,000 factory workers would be hopelessly handicapped in their race against the millions at work with a head-start of years in Germany, Japan and Italy.

► The muscle-misers and second-savers of our factories come in handy in this war, when splitting seconds in production is as important as it is in battle.

Who are the men that provide the arm-rests, jiggle the supply-boxes, conduct the ceaseless hunt for wasted half-seconds and needless human motion?

► They are the "methods" men of industry. They have all sorts of titles: plant managers, operations managers, methods engineers, efficiency engineers, etc. But their job is "to manage men and machines to save time and materials."

In peace, these men were the core of the industrial system that gave you the world's highest living standard at the world's lowest cost in hours of work.

► In war, these same "methods-managers," with the intelligent cooperation of American workmen, are cutting years from our arming task by splitting seconds from its millions of individual operations. This example of time-saving is just an indicator of what a plant operating man does. Such men have many other jobs, including the important job of plant maintenance, but "second-splitting" is the field in which they are the envy of the whole world.

The American Production Manager is the product of the American industrial system. Complex, loose-jointed and aimless though our system may seem to the theorist, it meets every challenge, because it is the best system ever devised by man for discovering, developing and rewarding individual initiative.

Reprints of this advertisement are available in handy booklet form.

McGRAW-HILL PUBLISHING COMPANY, Inc.

330 WEST 42ND STREET • • NEW YORK

SALLY—

IS UP YOUR ALLEY!

WASHINGTON, and other large city newspapers were used for the advertisement shown opposite, because government and public need to understand the asset which America has in its trained industrial staffs.

Read what we said about "methods management" in the advertisement, then ask yourself the secret of American genius for production economies in men, materials and time.

One big advantage we have in this country is the interchange of know-how between industries. If an instrument maker reduces a fourth-class hand motion to third-class, all other managers of small part assembly can, and do, find out how it was done.

By means of the articles and advertisements in FACTORY,* a plant operations magazine, tens of thousands of plant operating men keep abreast of each new development in equipment and technique.

The magazines of the McGraw-Hill Network of Industrial Communication exist solely for swapping ideas. They are backed by the editors and engineer-correspondents, who gather information wherever it is developed, and funnel it out to the fields where it is needed.

So valuable is this interchange of technical information that many companies are surveying their organizations to make sure that the supply of Industrial Magazines is adequate.

If you would like suggestions as to how to conduct such a survey, just write to Reading Counselor Department, McGraw-Hill Publishing Company, Inc., 330 West 42nd Street, New York.

★ ★ ★

THE McGRAW-HILL NETWORK

23 publications, which gather "war-news" from the "war-production-front" through a staff of 153 editors and 725 engineer-correspondents . . . More than 1,500,000 executives, designers, production men and distributors use the editorial and advertising pages of these magazines to exchange ideas on war-production problems.

THE McGRAW-HILL BOOKS

Publishers of technical, engineering and business books for colleges, schools, and for business and industrial use.

McGRAW-HILL PUBLISHING COMPANY, Inc.

330 WEST 42nd STREET • NEW YORK

THE McGRAW-HILL NETWORK OF INDUSTRIAL COMMUNICATION:

*Factory Management & Maintenance—*SHOWS HOW TO MANAGE MEN AND MACHINES TO SAVE TIME AND MATERIALS*

American Machinist
Aviation
Bus Transportation
Business Week
Chemical & Metallurgical Engineering
Coal Age
Construction Methods
Electrical Contracting
Electrical Merchandising
Electrical West
Electrical World
Electronics
Engineering & Mining Journal
E. & M. J. Metal and Mineral Markets
Engineering News-Record
Food Industries
Mill Supplies
Power
Product Engineering
Textile World
Transit Journal
Wholesaler's Salesman

ALSO AFFILIATED WITH BUSINESS PUBLISHERS INTERNATIONAL CORPORATION, PUBLISHERS OF BUSINESS AND TECHNICAL MAGAZINES FOR OVERSEAS CIRCULATION

The eyes of all America are upon the United States Treasury Roll of Honor appearing in the "Payroll Savings News." For copy write War Savings Staff, Treasury Department, Washington, D. C.

AS of today, more than 20,000 firms of all sizes have reached the "Honor Roll" goal of at least 10% of the gross payroll in War Bonds. This is a glorious testimony to the voluntary American way of facing emergencies.

But there is still more to be done. By January 1st, 1943, the Treasury hopes to raise participation from the present total of around 20,000,000 employees investing an average of 8% of earnings to over 30,000,000 investing an average of at least 10% of earnings in War Bonds.

You are urged to set your own sights accordingly and to do all in your power to start the new year on the Roll of Honor, to give War Bonds for bonuses, and to purchase up to the limit, both personally and as a company, of Series F and G Bonds. (Remember that the new limitation of purchases of F and G Bonds in any one calendar year has been increased from $50,000 to $100,000.)

TIME IS SHORT. Our country is counting on you to—

"TOP THAT 10% BY NEW YEAR'S"

HOW TO "TOP THAT 10% BY NEW YEAR'S"

Out of the 13 labor-management conferences sponsored by the National Committee for Payroll Savings and conducted by the Treasury Department throughout the Nation has come this formula for reaching the 10% of gross payroll War Bond objective:

1. ***Decide to get 10%.***
   It has been the Treasury experience wherever management and labor have gotten together and decided the job could be done, the job was done.
2. ***Get a committee of labor and management to work out details for solicitation.***
   a. They, in turn, will appoint captain-leaders or chairmen who will be responsible for actual solicitation of no more than 10 workers.
   b. A card should be prepared for each and every worker with his name on it.
   c. An estimate should be made of the possible amount each worker can set aside so that an "over-all" of 10% is achieved. Some may not be able to set aside 10%, others can save more.
3. ***Set aside a date to start the drive.***
4. ***There should be little or no time between the announcement of the drive and the drive itself.***
   The drive should last not over 1 week.
5. The opening of the drive may be through a talk, a rally, or just a plain announcement in each department.
6. Schedule competition between departments; show progress charts daily.
7. Set as a goal the Treasury flag with a "T."

EVERYBODY EVERY PAYDAY AT LEAST 10%

Save with
War Savings Bonds

This space is a Contribution to America's All-Out War Effort by Aviation

Have You a Special Plate Problem?

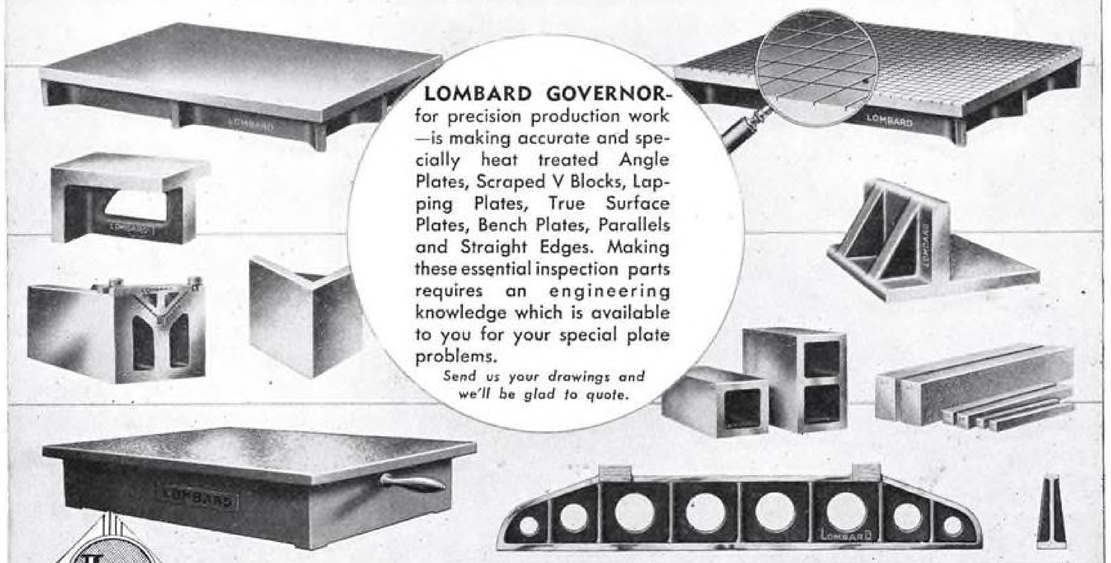

LOMBARD GOVERNOR—for precision production work—is making accurate and specially heat treated Angle Plates, Scraped V Blocks, Lapping Plates, True Surface Plates, Bench Plates, Parallels and Straight Edges. Making these essential inspection parts requires an engineering knowledge which is available to you for your special plate problems.

Send us your drawings and we'll be glad to quote.

LOMBARD GOVERNOR CORPORATION
300 MAIN ST., ASHLAND, MASS., U. S. A.

FOR VICTORY BUY UNITED STATES WAR BONDS AND STAMPS

Niagara Power Squaring Shears are built in a complete range of sizes up to 20 foot cutting lengths. Complete specifications available by writing Niagara Machine & Tool Works, Buffalo, N. Y. District Offices: General Motors Bldg., Detroit; Leader Bldg., Cleveland; 50 Church St., New York.

Production of America's largest transport planes and big bombers as well as fighters is being speeded up by batteries of Niagara Power Squaring Shears. Cutting accuracy heretofore unobtainable is made possible by the modern design of Niagara shears. Quick setting gages self measuring to increments of 1/128 inch, flat cutting of narrow strips, drive mechanism enclosed in oiltight cases, instant acting sleeve clutch and full visibility of cutting line are just a few of the many Niagara features.

SOUNDSTONE—NOISE CONTROL

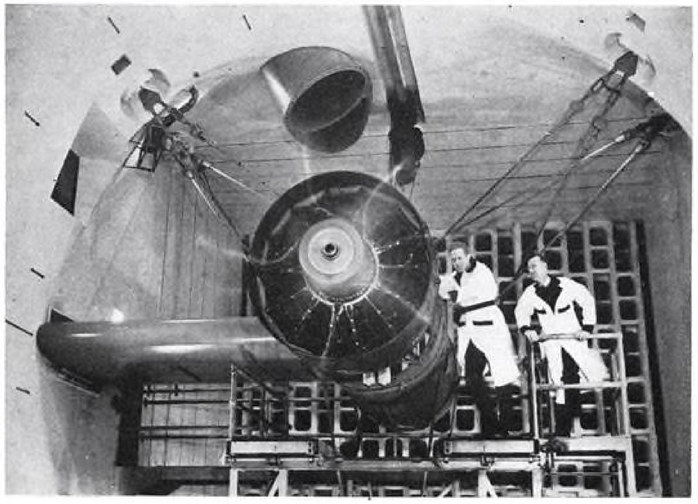

The Soundstone Acoustical Stone shown in the exhaust flue of this engine-propeller test cell not only eliminates the noise but does away with all future maintenance. Soundstone is permanent.

Consult Us on Your Sound Problems

INDUSTRIAL SOUND CONTROL

224 GARDEN ST.
HARTFORD, CONN.

HOMESTEAD

8 SO. MICHIGAN AVE.
CHICAGO, ILL.

Engineers and Contractors for Sound Insulations

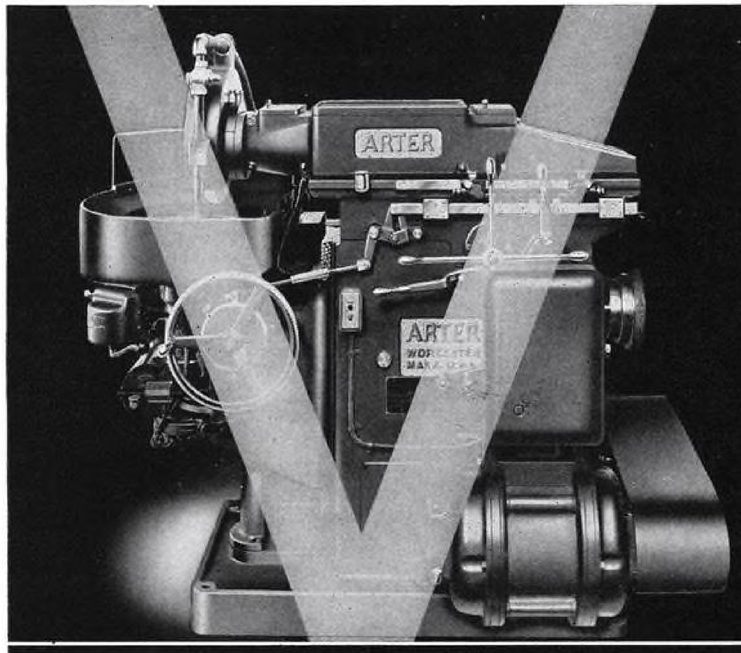

ARTER

V also stands for VERSATILITY.

Arter Rotary Surface Grinders give you wide versatility—precision surface grinding on a wide variety of surfaces.

Are you using your **Arter Rotary Surface Grinders** to their full capacity?

Arter grinding engineers are always at your service—to help you gain production-plus, the all-important need of the hour.

ARTER GRINDING MACHINE COMPANY

WORCESTER, MASSACHUSETTS • U. S. A.

ATTENTION PURCHASING AGENTS

WESTERN UNION

AVIATION CO. 115/118 NEW YORK, N. Y.
AVIATION PARTS MANUFACTURERS MUST
USE ANTI-CORROSION PAPERS EFFECTIVE
JANUARY 2ND. C. T. & P. CO.

On July 2nd Army-Navy Aeronautical Specification paper; greaseproof wrapping, was approved by joint action of the War and Navy Departments for use in the procurement of aeronautical supplies and shall become effective not later than January 2nd, 1943.

When this order becomes effective, it will be necessary to wrap all aviation machine parts subject to corrosion or deterioration to protect them from moisture penetration or from leakage of grease and oil, regardless of any methods now used to prevent corrosion.

In anticipation of this specification, Criterion has available a full line of superior anti-corrcsion papers.

Because these papers are being used today by numerous concerns in the aviation industry and many other aviation manufacturers who have been told to wrap with anti-corrosion papers, we strongly recommend ordering your requirements now.

We will gladly send you Free Samples, if requested, on your business letterhead, or if you prefer, our Packaging Engineer is available for consultation without obligation.

CRITERION PAPER & TWINE CO.

DISTRIBUTING CTP "PRODUCTS OF MERIT"

345 W. 36th ST. NEW YORK, N. Y.

For better results in

airplane design and drafting

—follow this guide-book of effective procedures and working hints and cautions

This book gives engineers, draftsmen, and others a concise but complete view of the airplane as a design problem, for their aid in better understanding any phase of design work and its relation to the complete design. Structure of the airplane and its parts is covered from the standpoint of showing functions of the various elements, usual types and materials, factors affecting design, and the procedure of the design department or group. Fully covers the background important to the designer, from aircraft weight and stress problems to the work of contract administration and testing groups.

Just Published

Introduction to AIRCRAFT DESIGN

By THOMAS P. FAULCONER,
Director of Education, Consolidated Aircraft Corporation

273 pages, 6 x 9, 31 illustrations, $2.75

Omitting detailed methods, equations, and analyses basic to general engineering training, this book goes directly to those special factors and problems, those definitions, practices, and tips you want to get a quick grasp of airplane and seaplane designing.

Gives practical material on such topics as:

—simpler fundamental conceptions in aerodynamics
—designing optimum installation for existing power plants of required types and power
—cautions for the control-surface engineer
—design of wings for special conditions
—common drafting errors
—considerations of arranging equipment in an airplane
—provisions for comfort of personnel in military aircraft
—factors affecting hull design
—designing elements embodying hydraulic forces
—characteristics of aircraft construction materials

CONTENTS

1. Aerodynamics and Preliminary Design
2. Power-plant Installation
3. Control-surface Design
4. Wing Structure
5. Fixed Equipment
6. Hull Design
7. Beaching- and Landing-gear Design
8. Electrical Equipment
9. Aircraft Hydraulics
10. Structural Design
11. Modern Aircraft Materials
12. Weight Engineering
13. Engineering Contract Administration
14. Testing and Research

A time-saver for all

A reference book of procedures, systems, and standards of wide practical value. Will help reduce the breaking-in time for new men—clarify many points for the draftsman and engineer—help men in all departments having to do with engineering drawings, in production, tool-design, inspection, etc.

10 DAYS' FREE READING — SEND THIS COUPON TODAY!

McGraw-Hill Book Co., 330 West 42nd St., New York

Send me Faulconer—Introduction to Aircraft Design for 10 days' examination on approval. In 10 days I will send $2.75 plus few cents postage or return book postpaid. (Postage paid on cash orders. Same return privilege.)

Name .....
Address .....
City and State .....
Position .....
Company AV-12-42

Don't Overshoot or Undershoot

in Production of Aircraft or Motor Parts

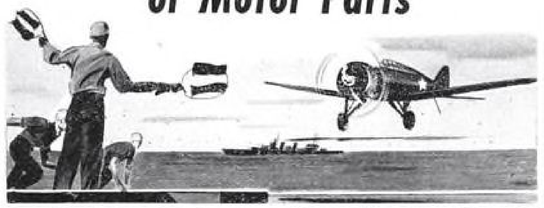

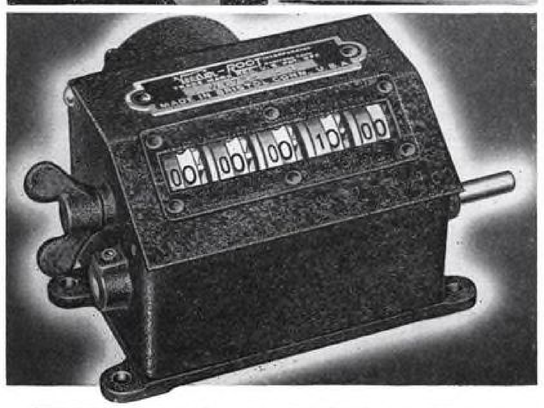

FINISHED parts for each aircraft sub-assembly come in on the beam—and right on time—when a Veeder-Root Counting Device "holds the flag" on each production machine in the line. Then the status of production at any given moment can be accurately gauged by a glance at the black and white figures on the counter face. And there are even counters that control a machine's run—like the Predetermining Counter above, which signals the operator or acts to stop the machine when it has completed the pre-set number of pieces or operations. In fact, there are Veeder-Root Devices, mechanically and electrically operated, for every type of production machine . . . and they are inexpensive, quick and easy to install. Find out how they can make *your* work count to the utmost.

ARMY E NAVY

VEEDER-ROOT

INCORPORATED

HARTFORD, CONNECTICUT

Counting and Computing Devices

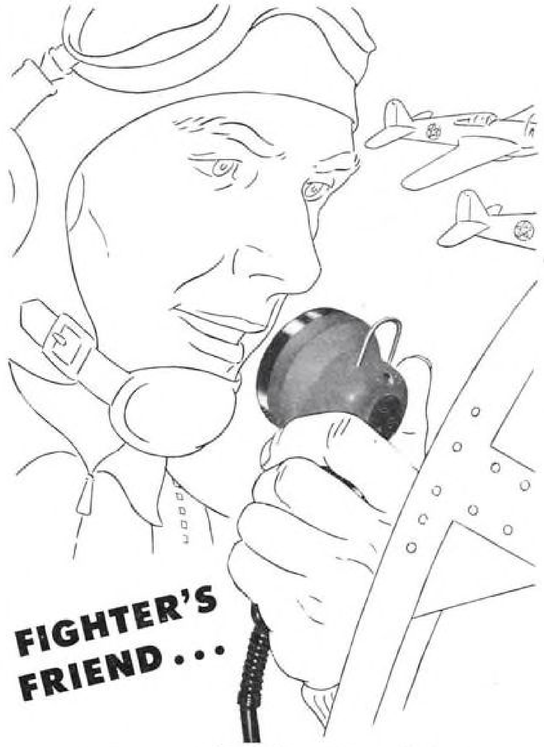

A Dependable, Sensitive Shockproof Microphone

Confidence—supreme confidence in his arms and equipment—is the secret weapon the American fighter takes into every battle. He knows, for example, that when he wants to give warning of sudden danger, to report an enemy ruse, to transmit an urgent message, his microphone won't fail at the moment of greatest need.

Many of the microphones used by our Armed Forces are made by Kellogg. They meet the rigid sensitivity, transmission and performance specifications of the U. S. Government. *But the modern Kellogg plant, with its great production facilities, has capacity to handle contract orders for still more microphones.* If the communication equipment you supply for the Armed Forces calls for microphones—hand, palm or throat types—get in touch at once with the Kellogg Industrial Sales Department.

Among the Many Products

MADE BY KELLOGG

On Contract for Suppliers to the Armed Forces

Among the complete systems and components of communication equipment Kellogg is making for military use are telephone and radio earphones; volume control and switch boxes; multi-contact plugs and sockets; capacitors; etc. On your requirements for these and other items, take advantage of Kellogg's 45 years of experience as a leading manufacturer of communication equipment of virtually every type. Precision production methods, skilled workmen, competent engineers and rigid inspection assure that products will meet every specification.

KELLOGG SWITCHBOARD & SUPPLY CO.

6620 S. Cicero Ave., Chicago, Ill.

WHERE ENGINEERING AND RESEARCH BUILD

KELLOGG *Finer Communication Equipment* FOR WAR AND PEACE

On the ball . . .

That's exactly what your supplier of springs and screw machine parts MUST be if you are to meet your production requirements. If you have a spring problem (up to 1/8" wire size) with magnetos, carburetors, controls, regulators and instruments . . . or screw machine parts requirements up to 1 1/4" (milled, drilled, slotted, tapped or threaded) . . . send us your blue prints. Extreme precision when necessary.

PECK SPRINGS

AND SCREW MACHINE PARTS

The Peck Spring Co. 10 Wells St., Plainville, Conn.

Everything in Fabric!

BLIND FLYING HOODS	ANYTHING OF FABRIC
ENGINE COVERS	COCKPIT ROLLS
LANDING GEAR, TAIL WHEEL	COWL PADS
AND STICK BOOTS	STRAPS
FUME PROOF SLEEVES	PAD ASSEMBLY HEAD RESTS
HUB COVERS	CORD ASSEMBLIES
CUSHIONS	WING COVERS
CRASH PADS	FUSELAGE COVERS
FLOOR COVERINGS	CONTAINER ASSEMBLIES
SEATS	FLEXIBLE GUN HEAD CUSHIONS
LIFE PRESERVER CUSHIONS	GUN BLAST BOOTS

Contact!

No matter what you want, in this classification, in fabric or leather, contact us — we produce the highest quality work only

"Everything in Fabric" BY POTTER

Made to your Specifications

L. POTTER, Inc. BETHPAGE, L.I., N. Y. *Tel.* HICKSVILLE 233

Unfailing PERFORMANCE

In step with the swift progress of aviation, the modern parachute has come into its own as a vital implement of war. It saves the lives of aviators in distress, brings food and equipment to besieged troops, and drops Paratroopers behind enemy lines. Such assignments call for unfailing performance . . . absolute perfection in every detail and every step of manufacture. With never-ending scientific research, technical developments, testing and inspection throughout every process of production, Pioneer Parachutes have stood these rigid tests, and today stand in the forefront of the industry.

PIONEER PARACHUTE COMPANY, INC.

MANCHESTER, CONNECTICUT, U. S. A.

CABLE ADDRESS: PIPAR, Manchester, Conn., U. S. A. TELEPHONE: Manchester 4157

where you want them
when you want them

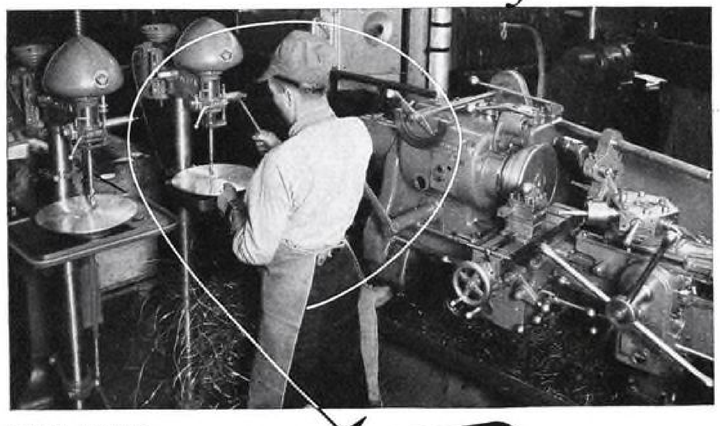

The *portability* and *flexibility* of Delta machines open many roads to increased production: Here illustrated are two 14-inch Delta Drill Presses set up alongside a screw machine. Operator performs two hand-feed operations on drill presses while waiting for power-feed on screw machine.

Other examples: When five drilling and tapping operations are required, a single spindle Delta Drill Press is moved up alongside a four-spindle drill press . . . to save toolmaker's walking and waiting time, individual Delta Drill Presses, Grinders and Band Saws are set up alongside each toolmaker's bench. (Full details will be furnished on request illustrating these and many other cases where Delta portability and flexibility have been utilized to solve production problems.)

DELTA DESIGN ALWAYS OFFERS THESE ADVANTAGES

Low First Cost
Low Maintenance Cost
Economical Operation
Reduced Labor Cost
Greater Flexibility
Portability

DELTA MILWAUKEE

Send for FREE "TOOLING TIPS"

Write for this practical shop bulletin showing how other manufacturers are taking advantage of the many features of DELTA-Milwaukee machines. Also for latest complete catalog. Get in touch with your Delta Industrial Distributor or write to The Delta Manufacturing Company, 636-N E. Vienna Ave., Milwaukee, Wis.

The designing engineers of aircraft companies believe "an ounce of prevention is worth a pound of cure." When they need material that will withstand tremendous stresses, many specify and use a strong rugged bronze that they *know* is the best available for the service—Ampco Metal, which has proved its worth in hundreds of severe industrial applications.

In aircraft application, the use of Ampco Metal safeguards the operation of important equipment in combat planes. Thousands of dollars worth of bombers and fighters and the lives of skilled pilots are safeguarded through use of Ampco parts. Wherever bronzes are needed, play safe with Ampco!

Literature on request.

AMPCO METAL, INC.

DEPARTMENT A-12 MILWAUKEE, WISCONSIN

AMPCO METAL — AMPCO — THE METAL WITHOUT AN EQUAL

If this were your

Roosevelt Aviation School

Certificate of Graduation from the

Master Airplane and Engine Mechanic Course

you would hold in your hand the key to a Career in Aviation. You would be properly trained to meet every requirement for Civilian Employment as a Maintenance Mechanic on Army Airplanes or on Commercial Airplanes.

A million mechanics are going to be needed to keep 50,000 planes in the air. No other type of expert is as much in demand as the Master Airplane and Engine Mechanic. So, if you want a training that will put you to work and keep you at work—now and after the war—sign and mail the coupon below and do it now.

1943 Classes Start Monday, January 4, and every fourth Monday thereafter.

We can accept only thirty students per month.

SIGN AND MAIL THIS COUPON AND DO IT NOW!

ROOSEVELT AVIATION SCHOOL,
At Roosevelt Field, Mineola, L. I., New York

Gentlemen: Without obligating me, please send details regarding your highly specialized

MASTER AIRPLANE AND ENGINE MECHANIC COURSE

Name _____ *Age* _____

Street Address _____

Town _____ *State* _____

A. Dec. 1942

LELAND MOTORS POWER THE ARMY'S ~~NATION'S~~ GAS PUMPS

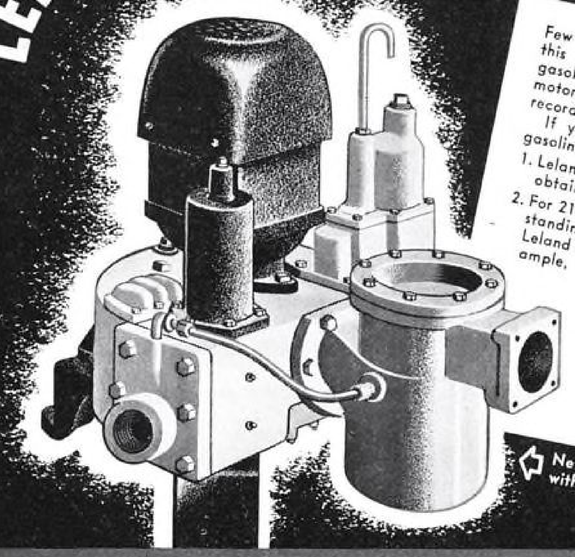

Few oil men will have to guess what motor powers this new Wayne pump for 25,000 gallon airport gasoline storage systems. It's a Leland . . . No. 1 motor in the gasoline industry by actual statistical record.

If your aviation problems include handling of gasoline, remember these important facts.

1. Leland was the first explosion-proof motor to obtain Underwriters' approval.
2. For 21 years Leland has been considered the outstanding source for gasoline service motors. The Leland gasoline dispensing pump motor, for example, has outsold all competitors **combined.**

These facts mean but one thing . . . if you handle gasoline, Leland motors can serve you best . . . if you have some unusual problem, 21 years of engineering experience in this field is available.

The Leland Electric Company,
Dayton, Ohio

New Wayne gasoline pump, powered with a Leland Motor, in Army Service.

LELAND *Special Gasoline Handling* MOTORS

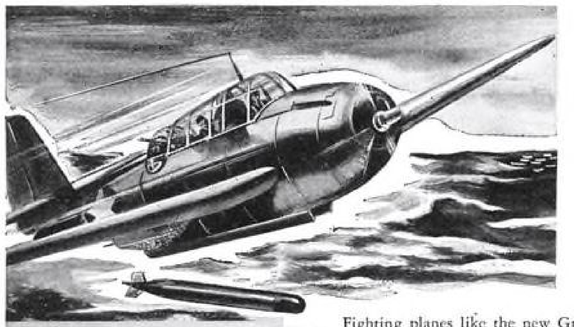

Control OF THE AIR BY ARENS



Fighting planes like the new Grumman Avenger Torpedo plane must be equipped with controls that can take it. This outstanding triple-threat plane is evidence of America's fast-growing mastery of the skies. . . .

Superior equipment in ever increasing quantities is the battle-cry of Victory now. Arens answers the call from America's leading manufacturers of war equipment for our land, sea and air forces by supplying ever increasing quantities of remote controls.

PRECISION BUILT... Only the best materials and soundest engineering principles are built into each Arens control.

DEPENDABLE... Over twenty years manfacturing one product have resulted in a more simplified, rugged design incorporating many exclusive features. For flexible or rigid remote controls, specify Arens and you get the best.

Write for Catalog on Business Letterhead

ARENS CONTROLS, INC.

2253 SOUTH HALSTED STREET • CHICAGO

IT'S UNDER PERFECT CONTROL IF IT'S ARENS

MANUFACTURERS OF FLEXIBLE AND RIGID CONTROLS — CONTROL HEADS AND BOXES

IRVIN *Air Chute*
The Life Preserver of the Air

SYMBOL OF SAFETY

The name "IRVIN" on the harness means the chute is produced in at Irvin Factory with over 20 years of experience and skill in chute-making.

Literature can be had by school or training executives for the asking. Address Main Office, Buffalo, N. Y.

IRVING AIR CHUTE CO., INC.
1670 Jefferson Ave., Buffalo, N. Y.
Other factories in United States, Canada and England.

IRVIN *Air Chutes*

SERVING OVER 40 GOVERNMENT AIR FORCES

WELDON ROBERTS
Brightboy
REG. U.S. PAT. OFF.

De-burring and finishing holes and edges in Alclad part with Brightboy Wheel.

Removing excess weld, heat stain, and finishing tube seam with Brightboy Wheel.

A 3-WAY PERFORMANCE

★DE-BURRING ★FINISHING ★POLISHING

with
WELDON ROBERTS

Brightboy

"The SOFT RUBBER Binder CUSHIONS The ABRASIVE"

Brightboy is an outstanding example of how a minimum amount of rubber is put to maximum use, economically effecting substantial time and work savings in America's war industries.

In use, Brightboy's abrasive "recedes" into its rubber binder, producing a unique effect—de-burring, finishing and polishing, and putting on a slight radius, all in one operation. In function, it bridges the gap between a grind and a buff, taking over where grinders leave off. Brightboy sticks, blocks, rods and special shapes have innumerable applications in manual work and drill press jobs. Brightboy is particularly effective in close tolerance work.

Available to war industries through mill supply dealers. Brightboy field men are at your service. Write us for prices, catalog and leaflet on "Methods and Applications" if your dealer cannot give you detailed information.

BRIGHTBOY INDUSTRIAL DIVISION
WELDON ROBERTS RUBBER CO.
NEWARK, N. J., U. S. A.

1. Removes light digs, tool and heat marks.
2. Cleans welded and soldered joints.
3. Finishes dies.
4. De-burrs light stampings and machined parts.

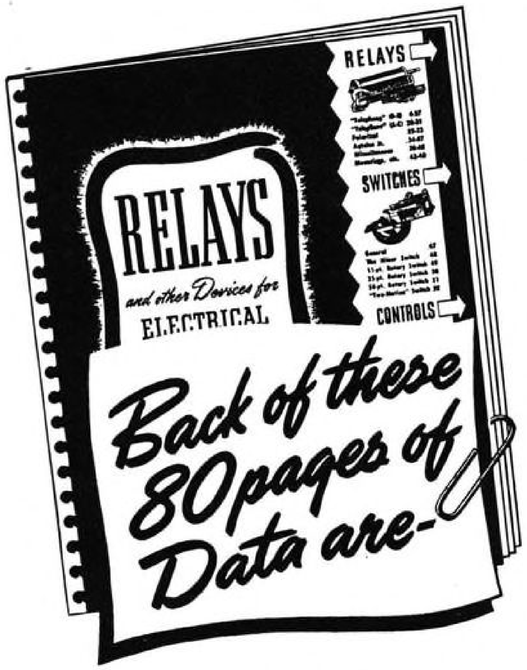

50 years of EXPERIENCE for you to use

HIGH quality electrical control devices are not made merely by putting men, tools and materials to work. Long familiarity with electrical control problems is needed to develop dependability, long life and precise performance. That is why Automatic Electric's half century of experience is so important today to designers and producers of war products.

This same experience is reflected throughout Automatic's new 80-page catalog. It contains more authoritative data, about a wider variety of electrical control products, than you will find in any other book on the subject. Be sure to write for your copy.

And Automatic Electric's field engineers can provide practical assistance too—make valuable time-saving and effort-saving suggestions. Ask our nearest representative to work with you in selecting the equipment best adapted to your needs. A letter or call to our nearest office will bring full information promptly, or if you prefer, write us direct.

AMERICAN AUTOMATIC ELECTRIC SALES COMPANY
1033 West Van Buren Street, Chicago, Ill.

RELAYS

and other control devices by

AUTOMATIC ELECTRIC

"Man" your ELWELL-PARKERS the *New* way!

Your *men* are being siphoned off—into other jobs in your own Plant; into the Nation's Armed Services.

But your *loads* must keep right on zipping—and they *will,* because we're helping you to train women to operate your Elwell-Parkers!

Now as always, we recognize our responsibility for helping you to realize the greatest returns from your Elwell-Parkers. Count on us for:—

Inspection and parts replacement. A Service Man will inspect your Elwell-Parkers and recommend interchangeable replacement parts.

Training for your Women Operators. Women learn quickly to handle Elwell-Parkers. An Elwell-Parker Representative will give preliminary instructions.

Handy New Instruction Bulletin. "Lady—will you Give a Lift?" explains every detail—large pictures, simple text.

The Elwell-Parker Electric Company, 4125 St. Clair Avenue, Cleveland, Ohio.

ELWELL-PARKER *Power Industrial* TRUCKS

ESTABLISHED 1893 • BUILDING POWER INDUSTRIAL TRUCKS SINCE 1906

The Answer to WATER-COOLED *Dynamometer Cooling*

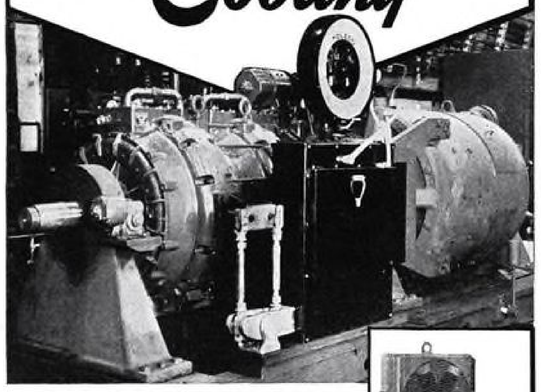



Young ENGINE JACKET WATER COOLERS

For one large aircraft engine manufacturer, dissipating the heat from dynamometers on test runs of production engines was causing excessive water costs; not to mention frequent repair and overhaul due to hard scale deposits in the dynamometer jackets. YOUNG Engine Jacket water coolers were installed, resulting in savings of $1.84 on water costs alone per engine test run. Using a closed system with YOUNG units doing the cooling makes it possible to treat the jacket liquid with YOUNG inhibitor insuring maximum efficiency and performance at all times. Constant temperature regulation of the water jacket is provided, thereby eliminating thermal distortion caused by excessive jacket water temperature changes due to variations in operation. Whatever your heat transfer problems may be, YOUNG products include a unit to handle it—oil Temperature Regulators, Oil Coolers, Supercharger Intercoolers, Radiators for liquid cooled engines, Cabin Heaters, heating, ventilating and air-conditioning equipment . . . and many especially designed heat transfer units for military planes.

New YOUNG "QUAD" for large capacity dynamometer cooling.

YOUNG RADIATOR COMPANY
Dept. 292-M **Racine, Wis., U. S. A.**

Young
PRESENTED BY Young ENGINEERING AND MANUFACTURING SERVICE SPECIALIZING IN HEAT TRANSFER PRODUCTS
HEAT TRANSFER PRODUCTS
OIL COOLERS • GAS, GASOLINE, DIESEL ENGINE COOLING RADIATORS • INTERCOOLERS • HEAT EXCHANGERS • ENGINE JACKET WATER COOLERS • UNIT HEATERS • CONVECTORS • CONDENSORS • EVAPORATORS • AIR CONDITIONING UNITS • HEATING COILS • COOLING COILS

BUY WAR BONDS—SALVAGE SCRAP

How to install and overhaul ALL TYPES OF AIRPLANE ENGINES and ACCESSORIES



Here is a comprehensive and authoritative manual for those concerned with aircraft maintenance and others who need a detailed working knowledge of airplane engines and accessories. Its 20 sections present a wealth of practical information on everything from construction details of all types of engines to suggestions on the care of pontoons, from instructions for the complete assembly of engines to methods of splicing wires, in a fully-illustrated, easy to-understand treatment. Here are the facts and figures in usable and dependable form, compiled by Fred Colvin, one of the country's leading writers of practical technical books, and based largely on latest information from manufacturers.

Aircraft Handbook

By FRED H. COLVIN, *Editor Emeritus, American Machinist.* Revised Fifth Edition, 782 pages. 5½ x 8, 621 illustrations, 112 tables. $5.00

CONSULT Colvin's Handbook for constructional features of airplane engines, specifications, limits of wear, electrical and lubricating systems, etc., methods of installing, disassembling and assembling them, caring for and adjusting their parts, etc.—everything necessary to the intelligent performance of inspecting, servicing, and repair work. Check your problems against best accepted practice, as reflected in its fact-filled pages.

The Handbook covers all types of engines and their accessories, and adjustable propellers, the most used airplane instruments, landing gear, floats, etc.—with a profusion of understandable descriptions, tables, diagrams, servicing and trouble-shooting procedures. Here is the means of avoiding errors, saving time and trouble in procuring vital information, assuring yourself of best results in a wide variety of problems.

FEATURES OF THIS NEW 5TH EDITION:

First published details of the new Allison engine and of the Rolls-Royce Merlin engines;—Inspection repair and assembly details of the Pratt-Whitney and Wright engines;—Small plane engines shown in detail. Cooperation of the leading builders of engines, magnetos, spark plugs, starters, etc.; plus the experienced touch of Fred Colvin in presenting the plain instruction and descriptions, contribute to a volume upon which you can depend for completeness and authority.

10 DAYS' FREE EXAMINATION

McGraw-Hill Book Co., Inc.,
330 W. 42nd St., N. Y.

Send me Colvin's Aircraft Handbook for 10 days' examination on approval. In 10 days I will send you $5.00, plus few cents postage or return book postpaid. (Postage paid on cash orders. Same return privilege.)

Name .....
Address .....
City and State .....
Position .....
Company ..... AV. 12-42

Dillon
TENSILE TESTER

PORTABLE 10,000 POUNDS CAPACITY

Weight: 83 pounds, height: 32 inches—yet allowing all type stress tests up to 10,000 pounds! Large specimen space for wide range of materials. Extremely accurate, easy to operate, low in cost.

Write for Catalogue B-A

W. C. DILLON & CO. Inc. — 5410 W. HARRISON STREET CHICAGO, ILLINOIS

CHECK ✓ CAREFULLY— MEPHISTO
BLUE PRINT CHECKING PENCILS

Made expressly for checking on blue prints, but will also be found suitable for all other checking requirements.

1340 Brick Red	1343 Orange
1341 White	1344 Blue
1342 Yellow	1345 Brown

SET 01340 contains one each of the six colors and was produced at the request of several of the U. S. Government offices.

KOH-I-NOOR Drawing Pencils produce better blue prints

Send for free catalog No. 16

KOH-I-NOOR PENCIL COMPANY, INC.
373 Fourth Ave. — New York

From **BIG BOMBERS TO C.A.P. PLANES**

BOWSER

KEEPS 'EM FLYING

ABOVE GROUND
•
UNDER GROUND
•
MARINE TYPE
•
CENTRALIZED TYPE
•
MOBILE TYPE
•
PORTABLE TYPE
•
SYSTEMS

In Many Sizes

This is WAR! But during war or peace, you will find Bowser fueling systems doing an outstanding job . . . a job of dispensing fuel that is clean, dry, safe! and accurately measured! In the above ground Serv-A-Plane for smaller planes, in the underground fueling pits . . . in the high speed systems for big planes you will find every precaution taken to remove dirt and water from the fuel. Bowser also manufactures de-fueling equipment and units for storing and dispensing lubricating oils.

CLEAN — DRY — SAFE — FUEL

S. F. BOWSER & CO., INC.
Fort Wayne, Ind.

AMERICA'S PIONEER BUILDER of AIRPLANE FUELING SYSTEMS

Only 2 Engines—but

MORE POWER... ...GREATER LOAD



• That two engines now do the work of four speaks for the prodigious solutions to the job of air transport in the war and after. Greater power per cylinder means greater load per engine. Implied here is the obvious fact that U. S. *Super-Positive* Piston Rings contribute no small part to the efficacy of America's most powerful aircraft engines.

★ ★ ★ ★

U. S. HAMMERED PISTON RING CO., INC.
STIRLING, NEW JERSEY, U. S. A.

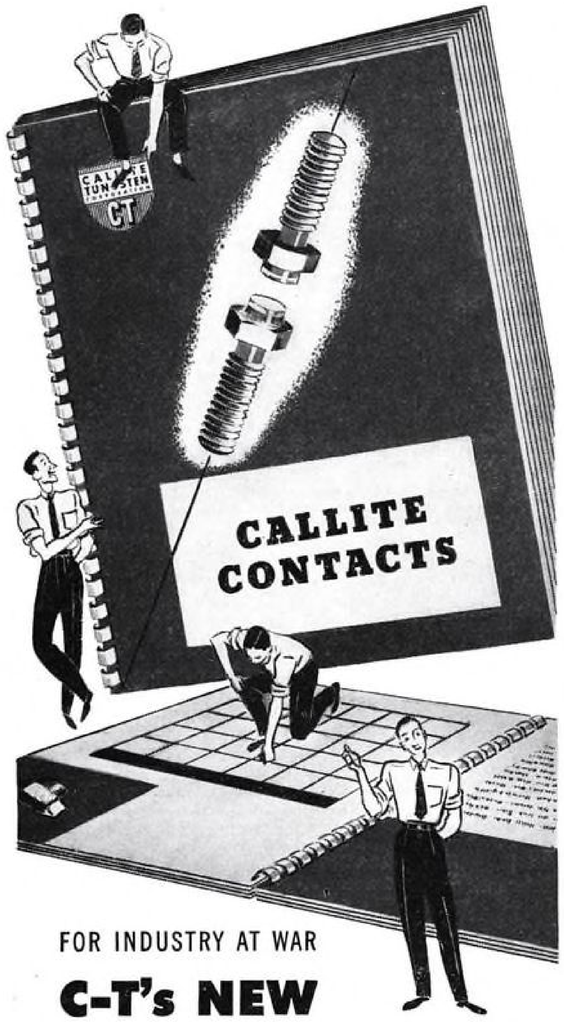

FOR INDUSTRY AT WAR

C-T's NEW CONTACT CATALOG

The data packed into the thirty-six pages of the new C-T Contact Catalog offer real solution to the problem of specifying electrical contacts for the war effort. Send for your copy today. Callite Tungsten engineers, specialists in the field of electrical contacts are ready to consult with you.

CALLITE TUNGSTEN CORPORATION
545 39th Street, Union City, New Jersey. Branches: Chicago, Cleveland.
Cable: "Callites"

KEEP 'EM ROLLING WITH

CALLITE CONTACTS

Specialists in the manufacture of electrical contacts and formed parts for all electrical and electronic applications—standard or special shapes—in tungsten, molybdenum, silver, platinum, palladium and alloy combinations of these alloys.

CALLITE TUNGSTEN CORPORATION CT
Reg. U.S. Pat. Off.

Announcing

An authoritative guide to the special problems of DESIGNING ALL-METAL AIRPLANES

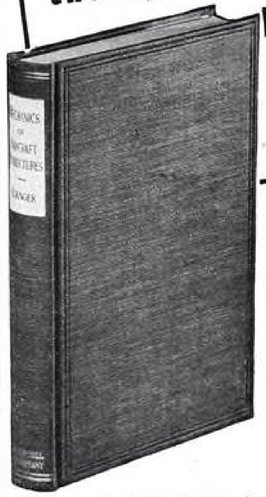

This book provides the engineer with all the tools of modern airplane design—reviewing the factors and materials of design and design procedure generally, then taking up in detail the structural analysis and design formulas of all-metal airplane structures.

ENLARGED 2nd EDITION

MECHANICS OF AIRCRAFT STRUCTURES

(Formerly entitled Structural Design of Metal Airplanes)

By John E. Younger
Professor of Mechanical Engineering, University of Maryland

396 pages, 6 x 9, 297 illustrations, $4.00

• Opening chapters cover the fundamentals of aircraft design—the factors dealt with, general design procedure, etc.,—and the materials of airplane construction. To meet progress and specialization in the industry, this preliminary material in this edition has been condensed in favor of a wealth of design and structural analysis data, carefully organized and presented in simplest and most usable form for the reader. Thus this edition is enlarged in size, with many new illustrations and charts, and with more than 50% entirely new material on design of flat and curved reinforced plate structures, torsional rigidity of wing box beams, cantilever wing analysis, shear lag, fuselage design, pressure cabin structural design, and other subjects in keeping with advanced trends in aircraft materials and design requirements.

Look over these 21 chapters

1. Design Requirements
2. Materials of Fabrication
3. Summary of Basic Stress Formulas
4. Structures, Past, Present, Future
5. Properties of Structural Sections
6. Fundamentals of Structural Analyses
7. Beams, Columns and Beam-Columns
8. Continuous Beams and Continuous Beam-Columns
9. Analysis of Torsion Members
10. Elementary Principles of Design of Sheet-Metal Construction
11. Design of Flat Reinforced Plate Structures
12. Design of Curved Reinforced Plate Structures
13. Design of Thin Walled Columns and Stringers
14. Torsional Rigidity of Wing Box Beams
15. Introduction to Cantilever Wing Analysis
16. Design of Thin Sheet Wing Webs
17. Introduction to Shear Lag
18. Problems in Fuselage Design
19. Pressure Cabin Structural Design
20. Wing Flutter and Other Structural Vibrations
21. Riveting in Aircraft Construction

10 DAYS' FREE EXAMINATION

McGraw-Hill Book Co., Inc., 330 W. 42nd St., New York
Send me Younger's Mechanics of Aircraft Structures for 10 days' examination on approval. In 10 days I will send you $4.00 plus few cents postage or return book postpaid. (Postage paid on cash orders. Same return privilege.)

Name .....
Address .....
City and State .....
Position ..... Company ..... Av. 12-42

CONTROLS THAT SERVE

THE ARMY THE NAVY THE AIR CORPS

WARD LEONARD is in a unique position. Practically all of the electric controls they made for peace-time service meet urgent needs for war-time production. Manufacturers of equipment for the Army, Navy, and Air Corps will probably find their exact requirements for electric controls in the Ward Leonard Line. Special Controls and Control Assemblies are also available to meet special requirements. Send for complete data bulletin.

WARD LEONARD

RELAYS • RESISTORS • RHEOSTATS

Electric control (WL) devices since 1892.

WARD LEONARD ELECTRIC CO., 57 SOUTH ST., MOUNT VERNON, N. Y.

Cut Drafting Room Jams!

Get Prints to the Shop FASTER
Speed Departmental Information!

HUNTER
Electro-Copyist

"COPIES ANYTHING"

Here's the perfect reproducing machine that saves you hours of vital copying time! In a matter of minutes you can now have photo-exact, error-proof copies of anything typed, printed, drawn or photographed. Electro-Copyist is ideal for quick reproduction of specifications, blueprints, government contracts, etc. It even makes tracings on linen or vellum with perfect accuracy—saving valuable hand-tracing labor! And *it can't make a mistake!*

It's economical to use—no dark-room, no lenses; so simple an office boy can run it! Many different models: 30" x 42" down to a small portable! Send for our big new folder, containing many drafting room short-cuts—write us today!

SENSATIONAL NEW PHOTOCOPY PAPERS—FOR ALL KINDS OF CONTACT COPYING

Get sharper, cleaner prints . . . prints that are accurately toned from pure white to opaque black! It's Hecco-Dyzing that makes all the difference—and only Hunter has this secret-formula dye that's revolutionizing photocopying. Ask for samples of Papers and Linen.

HUNTER
Electro-Copyist, Inc.
478 S. Warren St., Syracuse, N. Y.

THE KING PIN!

The Proven, basic, precision Cartridge, from which all other Fenwal Thermoswitches are derived.

Let us quote you on a standard Thermoswitch design that fits the needs of your defense contract. (If your job is an unusual one we will design a "special" for you!)

Ratings: —100 to 600°F., 10 amperes or 25 amperes, 115 Volts A. C., sensitivity ±.1°F.

Fenwal
INCORPORATED
205 MAIN STREET
ASHLAND, MASSACHUSETTS

Where *Precision* Counts!

▲

Machining
and Assembling
of
Experimental
Engine Parts

▼

Accuracy in the highest degree is an absolute "must" when aircraft engine parts are in the experimental stage in order to insure top-notch performance by the finished product. Recognizing this fact, leading manufacturers in this field have for years been entrusting this class of work, in large part, to Govro-Nelson.

● *Write Us Concerning Your Requirement*

THE
GOVRO-NELSON
COMPANY

1931 Antoinette Detroit, Mich.

THESE POINTS OF LITTELFUSE PROTECTION FOR BETTER FUSE SERVICE

LITTELFUSE

√ *Elements Twisted At 90°*

A second Littelfuses feature that provides additional

BRACING AGAINST VIBRATION

Above diagram greatly enlarged, shows a distinctive LITTELFUSE characteristic vitally important in the high mechanical strength, fatigue, and vibration resistance of

AIRCRAFT ANTI-VIBRATION TYPE

LITTELFUSES

But this is only one of the features that mean longest life, utmost dependability in Littelfuses.

4 AG Aircraft Anti-vibration type. Note twisted element.

Send for Complete Littelfuse Catalog.

Above features and others explained in detail. Littelfuses for aircraft, radio, ordnance, and marine services, communications, every instrument purpose. Clips, Mountings, Panels, Extractor Posts, all accessories. Write.

Exclusive Littelfuse Design

(1) Locked cap assembly.

√ (2) Element twisted at 90° braces against vibration.

(3) "Gooseneck" non-crystallizing fuse element takes up contraction and expansion. Solves heat problem.

LITTELFUSE INC.

First in Aircraft Fuses—Pioneers in the Industry.

4749 RAVENSWOOD AVE., CHICAGO, ILLINOIS

Recognized the world over as the finest tools obtainable, ARMSTRONG TOOLS enjoy their logical position in the aviation industry. Wherever quality rules, you will find TOOL HOLDERS, WRENCHES, DOGS, CLAMPS, SETTING-UP TOOLS and MACHINE SHOP SPECIALTIES marked with the ARMSTRONG "Arm-and-Hammer."

ARMSTRONG BROS. TOOL CO.
"The Tool Holder People"
340 N. Francisco Ave. Chicago, U. S. A.

SIGNAL MOTORS

Type LD1B-1.

Aerial camera motor, 1/120 H.P. with speed of 6000 R.P.M. — 12 volts. Equipped with ball bearings; diameter of housing 2 3/16"; overall length not including shaft 3 7/32"; shaft extension 1"; shaft diameter .1875" (3/16") weight 14 oz. Wrinkle finish.

Aircraft

Type LD3R

Antennae reel motor, wound for 1/13 H.P. at 8500 R.P.M.—either 12 or 24 volts. Equipped with ball bearings. Reversible (3 leads); diameter of housing 2.306"; overall length not including the shaft extension, 2-15/16"; shaft extension .766"; shaft diameter .250"; weight 1 lb. 3 oz.

SIGNAL TELEGRAPH Instruments

SIGNAL Wireless and Telegraph Instruments are playing an important part in the war effort. Constructed according to exacting specifications, they are used in many branches of the service and are recognized for their high quality and dependability.

#112-S Sounder

J-38 Key

SW-37 Relay

SIGNAL ELECTRIC MFG. CO.
Menominee, Michigan

Offices in all Principal Cities



SPREADING THE WINGS THAT WIN VICTORIES

Hourly the might of America grows stronger . . . EVER stronger . . . as former peace-time pursuits turn abruptly to meet war-time needs.

In that miracle of conversion the skills, energies and increased facilities of this company are now largely devoted to producing vital products for Victory. Even with our present wide assignments, we are able to offer the benefits of our plant facilities to others who can use them. Send for our new booklet, "AVAILABLE FACILITIES FOR THE WAR PROGRAM."

ARNOLT MOTOR COMPANY
WARSAW, INDIANA
ASSOCIATED WITH
ATLAS STEEL AND TUBE COMPANY
SEA-MITE *Marine Engine*



A 400 CYCLE MARGINAL RELAY

. . . "CUSTOM-BUILT" BY CLARE

Weight: 3½ oz. Size: 19/16 in. high x 2 in. long x 1⅞ in. wide

To meet a current trend we have developed a 400 cycle marginal relay for use on high speed ships employing dynamotor power supply to save the weight and space of heavy batteries and other power supplies. ▸▸▸ This 400 cycle marginal relay is available in several forms of contact combinations, such as 18 gauge palladium or silver. Perfected leaf hinge employed for armature movement. ▸▸▸ This Clare development is typical of the "custom-built" service which Clare engineers develop in cooperation with aircraft engineers to save space, weight, and provide higher efficiency. ▸▸▸ C. P. Clare and Co., 4719 West Sunnyside Avenue, Chicago, Illinois. Sales engineers in principal cities. Cable address: "CLARELAY."

CLARE RELAYS
"CUSTOM-BUILT" for AIRCRAFT

TOOL-POWER BUILDS AIR-POWER!

No machine, no equipment can be assembled, disassembled or serviced without tools.

Tools build airplanes, guns, tanks, ships. And tools keep them in action.

An important part of America's tool-power is supplied by Williams, a leader whose reputation has been won over a period of sixty years. Today, as always, Williams' Tools handle an infinite variety of jobs with speed and unfailing efficiency. Write for literature.

J. H. WILLIAMS & CO., Buffalo, N. Y.
DROP-FORGINGS and DROP-FORGED TOOLS

HARVEY HUBBELL INC.
MACHINE SCREWS FOR AIRCRAFT
Stainless Steel, Brass & Steel



Fifty years reputation
FOR QUALITY AND PRECISION

The highest grade metals are used, and all screws are carefully gauged and inspected. Screws are manufactured to "AN" specifications with either Class 2 or Class 3 thread fit.

● *Our facilities* are not fully occupied and we solicit your orders or inquiries.

HARVEY HUBBELL INC.
STATE STREET DEPARTMENT—"H" BRIDGEPORT, CONN.

LOOK! next month for Sterling's NEW SANDER

Outstanding Development in Its Field. Speeds War Production.

STERLING TOOL PRODUCTS CO.
387 East Ohio Street • Chicago, Illinois

Right to the Mark!

The target is Springs . . . in great quantities . . . to exact specifications. Guided by metallurgical knowledge, skilled tool makers and automatic springmaking equipment, Raymond workers have all sights drawn on the bull's-eye . . . . . deliveries.

RAYMOND MANUFACTURING CO., CORRY, PA.
DIVISION OF ASSOCIATED SPRING CORP.
RAYMOND SPRINGS

Drawing with all our might . . .

Continuously working at capacity, we are truly "drawing with all our might!" We are proud that Wilbur B. Driver Co. special alloys have so many vital war applications and of the part they are playing toward the final complete strangling of the "Unholy Three".

Perhaps we can help you make your product do its part more effectively or get on the job more quickly. Consult us for your requirements.

WILBUR B. DRIVER CO.
NEWARK, NEW JERSEY

Two Pole
OPEN BLADE SWITCH
AN *Acro Snap* DEVELOPMENT

The above switch is single throw, normally open. Single throw normally closed and double throw are also available. Made as return type (illustrated) or set type. In latter construction blade remains in either position.

Each branch of the switch has the same current carrying parts as standard ACROSNAP Switch which has been rated at 25 Amp. 28½ Volts D.C. on a resistance load by Air Corp. Insulation is sufficient for 440 volt circuits.

The patented rolling spring action produces high speed operation, freedom from vibration and minimum bounce.

Write for details covering your applications.

ACRO ELECTRIC CO.
3163 Fulton Rd. Cleveland, Ohio

"THE SWITCH WITH AN *Engineered* PRINCIPLE"

STEP UP PRODUCTION!

WITH GROB DIE MAKING MACHINES

Unmatchable performance for most difficult sawing and filing of tools and dies. Compact, powerfully built, for rigorous shop service. Faster, more economical in operation.

Write or wire for details and prices.

GROB BROTHERS • GRAFTON, WISCONSIN

USED IN WAR EQUIPMENT

Parts and Complete Assembly

DRAKE No. 50 Type

MOST popular and most versatile of all Drake Jewel Light Assemblies, Type 50 is used in large quantities for aircraft, communications, radio, and other electrical war equipment. Mounts horizontally in small space; ⅝" Jewel. 3 removable fibre washers compensate for varying panel thicknesses. T3½ Tubular Lamp changes from front of panel. Big variety of Drake Assemblies are described in our catalog. Have you a copy?

DRAKE MANUFACTURING CO., 1713 W. Hubbard St., Chicago, Ill.

Pacific Coast Representative: Radio Products Sales Co. 238 W. 15th St. Los Angeles



For C.A.P. and C.P.T.P.

Prompt delivery on low-cost, light-weight

CHAMPION GENERATORS

Wind Driven and Engine Driven • Write for complete data and prices

CHAMPION AVIATION PRODUCTS

1702-10 S. FLOWER STREET • LOS ANGELES, CALIFORNIA



If there is anything you want—

or something you don't want that other readers of this paper can supply—or use—advertise it in

Aviation's Market Place

AVIATION "CLASSIFIED"

AIRCRAFT *Hydraulics*

CLARKE AERO-HYDRAULICS, INC.

PASADENA, CALIFORNIA

★ ★ ★ ★ ★ ★

PREFERRED

AS A SOURCE OF

STAMPINGS

Since 1903

Literature on Request

WHITEHEAD STAMPING CO.

EST. 1903 1665 W. Lafayette Blvd., Detroit, Mich

MOVING?

Redeeming your copy of Aviation from your old post office *costs money* . . . and it's a *nuisance*.

A copy of Aviation stranded where you used to live is no help to you on your job to-day. And the copy that's delayed is always the one you particularly want.

So, if you're going to change your address make sure Aviation comes to you on time. Just fill out the coupon and forward it to us.

CIRCULATION DEPARTMENT
AVIATION
330 W. 42nd St., New York, N. Y.

PLEASE CHANGE MY ADDRESS

NAME.....

OLD ADDRESS.....

.....

NEW ADDRESS.....

.....

COMPANY.....TITLE.....

WHERE TO BUY

NEW EQUIPMENT — ACCESSORIES — MATERIALS — SUPPLIES

ALLEN

"ALL-SOL"

STAINLESS STEEL

SODERING FLUX

A fast flux that makes soldering of stainless steel as easy as soldering tin plate. Works with all solders. Available in special odorless formula where less strength is needed. Send for sodering charts—they give valuable information.

L. B. ALLEN CO., INC.
6753 Bryn Maur Ave. Chicago

JACOEL CABLE SPLICER

Full swivel for splicing Aircraft control cables and Hoisting Slings. Cuts time of splicing at least 25%. Removable and adjustable jaws to fit cable sizes 1/16" to 7/16" for Thimbles or Bushings. Can be used for Production or Field Work. In use by U. S. Government, Aircraft Factories, Ship Yards, Aviation Schools and Industrial Field

Write for descriptive Bulletin

I. JACOEL CABLE SPILCING EQUIPMENT CO.
1880 Hertel Ave., Buffalo, N. Y.



ENGRAVING, ACID ETCHING, ELECTRIC MARKING

. . . All three with one machine . . . the PANTO

A COMPACT precision bench-type pantographic machine, with interchangeable heads . . . for engraving instrument dials, name plates, etc. . . . and for acid etching or electrically marking aircraft engine parts and tools—heat-treated or annealed—on flat, concave, or convex surfaces.

Illustration shows engraving head attached

»Write for Literature

H. P. PREIS ENGRAVING MACHINE CO.
159C SUMMIT ST. NEWARK, NEW JERSEY



Custom Aircraft Fabrication Available

We can produce small assembly units and fabricate aircraft parts on a sub contract basis for you.

Send us your specifications.

ROWE INDUSTRIES, INC.
3120 Monroe Street Toledo, Ohio

WIPING CLOTHS CHEESECLOTHS, AND TOWELS TO LICK ANY CLEANING JOB YOU'VE GOT!

Every cleaning job you have requires a special wiping cloth. BURCOTT's selection of wipers and towels includes the exact wiper you need. Not just cheap wiping rags you use once and throw away, but soft absorbent top-quality materials you launder and use over and over again. Discover the economies of BURCOTT's specialized wipers and factory towels used by war industries all over America. Send for FREE samples and prices of the wipers or towels you need—no agent will call.

BURCOTT MILLS
620-B2 West Fulton Street
CHICAGO, ILLINOIS

STANDARD AIRCRAFT FINISHES
Since 1913
TITANINE
TITANINE INC. UNION, N. J.

It pays to check this page . . .

EACH ISSUE

WHEN you are in need of some product, equipment or device to speed operation, save money or improve service . . . you may find it here—in the Where to Buy Section. Have you noticed these items in recent issues? . . .

Aircraft Finishes
Aircraft Fuse Panels
Aluminum Brazing Rods
Cable Splicers
Engraving, Acid Etching Electric Marking
Cheese Cloths
Fluxes
Industrial Gloves
Light Weight Skis
Mechanical Riggers
Pantograph Machines
Powdered Soap Dispensers
Propellers
Safety Skin Cleansers
Solder
Aluminum Solder
Soldering Paste
Towels
Welding Rods
Wiping Cloths

AVIATION'S MARKET PLACE

CLASSIFIED ADVERTISING

USED PLANES, ENGINES AND PARTS FOR SALE, TRADE OR WANTED
SPECIAL SERVICES OF DISTRIBUTORS, FIXED BASE OPERATORS, ETC.
(Sales and Service—Storage—Repairing—Charter—Aerial Towing or Exhibitions—Special Instruction
EMPLOYMENT—SELLING—BUSINESS OPPORTUNITIES: OFFERED OR WANTED
Address AVIATION "Classified", 330 W. 42nd St., New York, N Y Phone: MEdallion 3-0700—Ext. 556

RATES: UNDISPLAYED, 10 cents a word, minimum $2.50. (Position Wanted: ½ the undisplayed rate; box number counts as 4 words.) DISPLAYED $7.25 per inch. Contract rates on request.

Cub

CUB COUPE L65 1940 260 hrs. Privately owned, always hangared, excellent condition, pants, lights, brakes, new oleos, new pyralin, red and cream hand-rubbed, $1300. Antrim, 920 Gaunt, Gloucester, N. J.

Culver Cadet

1941 CULVER CADET 75 H.P. Continental 225 hours total time. Two way radio, Navigation lights, always hangared, never cracked. Privately owned. Price $2,000. No delivery. Walter Lux, 44 Arlington Road, Woburn, Mass.

Luscombe

LUSCOMBE 8A, Continental 65. Dual ignition, shock mounted panel, Kollsman sensitive altimeter, bank and turn, rate of climb, Learadio, brakes, navigation lights, 630 hours, $1800. E. Johannpeter, c/o American Airlines, Inc., Memphis, Tenn.

Piper Cub

REPOSSESSED 1938 Piper Cub Tandem, J-3, Continental 40, not flown in last 1½ years, 455 total hours, price $450. Interstate Finance Corporation, Davenport, Iowa.

Equipment & Products

Aircraft Batteries

AIRCRAFT BATTERIES, rebuilt. New plates and separators. Your case cover and costs. Let us quote. Bowers Battery Mfg. Co., Inc., Reading, Pa.

Miscellaneous

USED ARMY BLANKET, lined winter flying suits (cleaned) $12.50, used winter flying boots $3.50, rubber soled $6.00, Jackets, helmets, gloves. Good BG4B2S plugs $.25 each 4B2 also 18 other styles. Marvin Northrop Aeroplane Co., Minneapolis, Miss. No. 2

WASP CRANKCASES, S1H1 cylinders (Never used). Wright J5 parts, Cyclone. A-6 oxygen regulators, $25, Weston electric Generators $10, Instruments, School material, Flight indicators (Sperry) List free. Marvin Northrop Aeroplane Co., Minneapolis, Minnesota. No. 3

FIGHTING AIRCRAFT of America—in action! Send 10c for 9"x12" sample drawing of Grumman "Avenger" and list of many others. Henry Clark, 147-28—90th Ave., Jamaica, N. Y. No. 4

INDEX

AVIATION "Classified"—December 1942

Undisplayed ads offering only ONE make of plane are grouped under that make. Others appear under "USED PLANES—General" and are numbered and indexed to enable readers to conveniently locate the makes of planes offered, or other items of interest. All other undisplayed and displayed ads—excepting those relating to employment and business opportunities—are numbered, or referred to by number and indexed for the reader's convenience in quickly finding ads.

EQUIPMENT & PRODUCTS:
See Classification and/or Numbers as follows:

Aircraft Batteries	1
Army Coats	23
Cable Splicer	13
Finishes	28
Instruments	25
Miscellaneous	2, 3, 4
Pantographic Machine	20
Propeller	17
Skiis	11
Sodering Flux	6
Tires	5
Wiping Cloths	9

SERVICES AND INSTRUCTION:
See Classification and/or Numbers as follows:

Instruction (Books)	16
Repairing	17, 25, 27
Sales and Service	17, 25, 27
Schools	7, 8, 10, 12, 15, 19, 21, 26, 29
SPECIAL SERVICES	18
TRADE (See ads keyed "T")	
BUSINESS OPPORTUNITIES	24
CONTRACT WORK	22
PROFESSIONAL SERVICES	14

Tires

TIRES-WHOLESALE PRICES New Tires Non-skid 6:00x6 4-ply $10.75. Tubes $3.25. 6:50x10, 7:50x10, 8:50x10 and all tailwheel tires. For bargains and fast delivery Tires, Propellers, Spark Plugs, Batteries, Bob Trader Aero Supply, Municipal Airport, Pittsburgh, Penna. 24 Hours Service. No. 5

Employment

Position Vacant

AIRCRAFT—Inspectors and Mechanics—wanted immediately for extensive glider building program. Good wages and working conditions. Men and women with aircraft experience but not now working in the aircraft industry should apply. Other war workers should not apply. Pratt, Read & Co., Deep River, Conn.

Position Wanted

YOUNG WOMAN experienced in office work would like position in an airfield or aviation school office, preferable in Florida. Dependable worker. PW 775 (No. 1)

Work Wanted

SHIP US your motors. Aircraft Engine overhaul by licensed A&E mechanics. Any make or horsepower. Work guaranteed. P.O. Box No. 406, Providence, R. I. Will service ships away from our base.

(Continued on Opposite Page)

See Page	Advertiser	Number
429	Allen Co., Inc., L. B.	6
433	American School of Aircraft Instruments	7
433	Atlantic Aviation Institute, Inc.	8
429	Burcott Mills	9
31	Curtiss Wright Technical Institute	10
429	Federal Aircraft Works	11
433	Indiana Technical College	12
429	Jacoel Cable Splicing Equipment Co., I.	13
431	Lancaster, Allwine & Rommel	14
433	New York School of Aircraft Instruments	15
432	Pan American Navigation Service	16
432	Pester's Propeller Service	17
432	Philadelphia Rust Proof Co.	18
347	Plastics Institute	19
429	Preis Engraving Machine Co., H. P.	20
417	Roosevelt Aviation School	21
429	Rowe Industries, Inc.	22
432	Schofield's	23
431	Simmonds Aerocessories, Inc.	24
432	Snyder Aircraft Corp.	25
14	Spartan School of Aeronautics	26
432	Standard Aircraft Equipment Co.	27
429	Titanine, Inc.	28
433	Tri-State College	29

WHEN *Answering Advertisements*
PLEASE *do not send original letters, certificates or photographs. We cannot be responsible for their return. Please send photostat or carbon copies.*

Additional Position Vacant Ads on opposite page

SELLING OPPORTUNITIES

OFFERED—WANTED
Selling Agencies—Sales Executives
Salesmen—Additional Lines

Representative Available

WANTED—Coupling fitting and associated lines by established representative well connected with aviation industry in Arizona. RA 774 (No. 3)

Wanted

WANTED ENGINES or parts Wasp, Cyclone, J-6 Series, also light engines and complete airplanes. Cash. Write Aero Brokerage Company, Airport, Syracuse, New York.

ANYTHING within reason that is wanted in the field served by Aviation can be quickly located through bringing it to the attention of thousands of men whose interest is assured because this is the business paper they read.

A Sales Connection that is Unusual

1. A position with a company that is the oldest and largest of its kind in the world—whose product is not adversely affected by depressions or war conditions. On the contrary, our business today is excellent and as a result our men are making more money today than they ever have. We are serving the war industries and directly aiding in increasing production in these companies.

2. The people who are prospects for what we have to offer are of a very high type and consequently it is a pleasure to call on them. Inasmuch as our company enjoys a splendid reputation and our product is essential, we are more than welcome in the eyes of our prospects, especially in these times.

3. Our compensation plan is of such a nature that our men average from 80% to 90% in commissions. It also provides for a substantial amount of insurance as well as an attractive vacation. Annual earnings average about $4,000. Earnings start immediately from the day you go on the job—even while in training. You will be thoroughly grounded in our policies and field trained in our work. Since the business is established, and you get the benefit of business already in effect, maximum earnings are possible from the beginning.

4. Stability is a keynote in our company. Many of our men have been with us from 10 to 20 years. Several have passed the 25-year mark.

5. Company policy is to promote from within. Our District Managers, General Sales Manager and many other executives started in a similar position to the one being offered.

6. A car is essential, but the amount of traveling required is small. Desired age limit is 35 to 50, preferably married, good education required and previous sales experience is desirable. United States citizenship necessary.

If you are interested in learning more about this connection, write

SW-769, Aviation

330 West 42nd St., New York City.

POSITIONS VACANT

WANTED
WOMEN FLIGHT INSTRUCTORS

21 years of age or over, primary and secondary ratings. Excellent opportunity for advancement with large organization handling C. P. T. P. contracts.

Good climate. Ideal working conditions.

WRITE FOR APPLICATION
P-766, Aviation
330 W. 42nd St., New York, N. Y.

WANTED
INSTRUMENT EXPERT

By leading aircraft engine manufacturer in East. Engineering training and calibration experience required although not necessarily in aircraft engines. Must be able to devise new and more nearly accurate methods of temperature and pressure measurement and to improve existing methods. No applications sought from persons employed in war production.

P-771, Aviation
330 West 42nd St., New York City

WANTED
HYDRAULIC ENGINEER

with both Aircraft and Commercial experience for Development work. Old established company with excellent post war prospects.

P-773, Aviation
520 N. Michigan Ave., Chicago, Ill.

AIRCRAFT ENGINE MECHANIC
WANTED

as instructor by long-established approved aircraft school in New York. Teaching experience preferred but not required. Excellent salary and opportunity. State full qualifications in first letter.

P-772, Aviation
330 West 42nd St., New York City

PROFESSIONAL SERVICES

LANCASTER, ALLWINE & ROMMEL

Booklet — "General Information Concerning Inventions & Patents" and "Fee Schedule" sent without obligation.
Established 1915

Patents—Copyrights—Trade-Marks
Suite 452, 815—15th St., N.W., Washington, D.C.

WANTED New Products

● The advertiser, a responsible, large and long established manufacturing organization, will give serious consideration to outstanding new products, improvements or developments for post-war manufacture in its own plants. Such products must have a large potential peacetime market. Their added use for war purposes is desirable but not required. All negotiations will be direct, and information received will not be used or discussed outside the advertiser's organization. Address BO-770, Aviation, 520 No. Michigan Ave., Chicago, Ill.

SIMMONDS DEVELOPMENT DIVISION

Simmonds Aerocessories Inc.
Dept. B
10 Rockefeller Plaza
New York City, N. Y.

Seeks new types of aircraft and engineering accessories and components, preferably patented and also established U. S. products, for development and manufacture by the Associated Companies of the

SIMMONDS GROUP
throughout the world

SEE US FOR

SAE INSTRUMENTS SAE

NEW — USED — ALL TYPES — SALES — REPAIR — INSTALLATION — COMPLETE STOCK

STANDARD AIRCRAFT EQUIPMENT COMPANY

Approved Repair Station 188

Hangar "D," Roosevelt Field, Mineola, L. I., N. Y. Garden City 8753

Complete
C. P. T. P. . . . C. A. P.
Service

MOTORS · INSTRUMENTS
PARTS · ACCESSORIES

ASC
SNYDER
AIRCRAFT CORPORATION
MUNICIPAL AIRPORT · CHICAGO

PESTER'S
PROPELLER SERVICE

PROPELLERS
Latin American Trade Solicited
SALES • REPAIRS • SERVICE

U. S. Bureau of Air Comm. Appr. Pres. Repair Sta. 182

• PESTER'S •
ROOSEVELT FIELD, MINEOLA, N.Y., U.S.A.

ANODIZING OF ALUMINUM
HARD CHROMIUM
PLATING

Philadelphia Rust-Proof Co.
3217 Frankford Ave. Phila., Pa.

ARMY AND NAVY REJECTS

Army rain coats, sizes, S.M.L.
Army Air Corp. sheep-skin lined leather flying helmet, $4.50.
U. S. Navy sheep-skin lined destroyer coats, $20.00.
U. S. Army Air Corp., flying mittens, $10.00.
U. S. Navy reject oil skin suits, $6.50.
U. S. Navy sheep-skin zipper flying boots, $13.50.
U. S. Navy jungle flying helmets, $2.50.
U. S. Army reject summer flying suit, all zipper, $15.00.
U. S. Marine Corp. reject rain coat, $6.00.
All sheep-skin lined leather flying suits. U. S. Army Air Corp. specification. Price on request. Priority number necessary.

SCHOFIELD'S
COMMERCIAL SQUARE
EAST WEYMOUTH, MASS.

"MARKET PLACE"
advertisements for the
JANUARY ISSUE OF
AVIATION
should reach us by December 21st

BOOKS

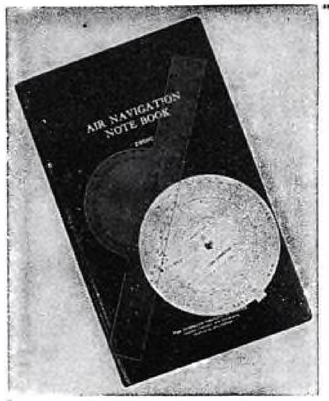

New Dead Reckoning Equipment

For Defense of Land, Sea and Air

AIR NAVIGATION TEXT with Dept. of Commerce Navigation Plotter, Necessary for Cross-country flights and for Commercial and Instrument rating examination. Difficult radius of action. Off course and alternate airport problems plotted and solutions given in a simple understandable method similar to the text used in the U. S. Naval Academy but improved. Book size 14x8½ in handsome red leatherette with gold letters. Plotter contained in patent cover pocket. Combination only $4.00 postpaid or C.O.D. U. S. Coast & Geodetic Computer shown in cut, with instructions $3.00 extra.

OUTSTANDING NEW AVIATION DEFENSE BOOKS

RADIO and INSTRUMENT FLYING: By Charles A. Zweng, Instructor, U. S. Air Corps, New 1941 Edition covering new important material. Written especially to prepare the pilot for government examination for "instrument rating." Radio-Telephone Permit included with Meteorology, Radio-Orientation, let-down, off-course and alternate airport problems. Only $4.00, postpaid.

Celestial Air Navigation Training

Prepare now for this important phase of Air Defense. Our students are now air navigators and instructors in various quarters of the world.

Write for information

FLIGHT INSTRUCTOR: A 1942 edition covering the written examination for flight instructor rating. New authentic Multiple Choice questions with answers included, $3.00 postpaid or C.O.D.
CELESTIAL NAVIGATION—complete equipment consisting of, Air Navigation Note Book and Navigation Plotter, Simplified Celestial Navigation, Air Almanac, Line of Position Book, and Illyness Star Chart; all 6 items only $1.75 postpaid or C.O.D.
AERONAUTICAL TRAINING. Just off the press. New enlarged edition. For the first time shows separate sections containing Private Pilot and Commercial Pilot "Multiple Choice Examinations." Makes your government test easy. $3.00 postpaid or C.O.D.
GROUND INSTRUCTOR. Written for the student preparing for "Ground Instructor Rating." Excellent for class work. Covers Navigation, Meteorology, Aircraft and Theory of Flight, Engines and Civil Air Regulation. $3.00 postpaid or C.O.D.
GROUND INSTRUCTOR RATING. Just published. Contains "Multiple Choice" examinations on Navigation, Meteorology, Aircraft and Theory of Flight, Engines and CAR. Nomenclature and aviation dictionary in back of book. It's new and different. Something you cannot afford to be without. $3.00 postpaid. Or it may be purchased in combination with "Ground Instructor" for $5.00.
AIRPLANE and ENGINE MECHANICS: Examinations. New authentic Quiz Book now covers the new Multiple Choice examinations fully illustrated with necessary diagrams. Used by Lockheed, Douglas, Northrup, Ryan and outstanding schools. Why fail? Only $3.00 for both examinations, and CAR.
AIR NAVIGATION (Gold Medal Edition) includes meteorology, $5.00 postpaid.
DALTON MARK VII AIRCRAFT COMPUTER: With book of instruction . . . $7.50.

Pan-American Navigation Service, 12021 Ventura Boulevard, North Hollywood, California

---

Prompt ANSWERS to business problems . . .

MISCELLANEOUS business problems are daily being solved quickly and easily by the use of the Searchlight Section of McGraw-Hill publications.

The Searchlight Section is classified advertising; you can use it at small cost, to announce all kinds of business wants of interest to other men in the fields served by these publications. It is the regular meeting place of the man with business needs and the men who can fill those needs.

When you want additional employees, want to buy or sell used or surplus new equipment, want additional products to manufacture, seek additional capital, or have other business wants — advertise them in the Searchlight Section for quick, profitable results!

Departmental Staff
McGRAW-HILL PUBLISHING CO., INC.
330 West 42nd Street, New York City

SEARCHLIGHT
(Classified Advertising)
SECTIONS
are found in these
McGRAW-HILL
Publications

American Machinist
Aviation
Business Week
Bus Transportation
Chemical & Met. Engrg.
Coal Age
Construction Methods
Electrical Contracting
Electrical Merchandising
Electrical World
Electronics
Engineering & Mining Journal
Engineering News-Record
E. & M. J. Markets
Factory Management & Main.
Food Industries
Power
Product Engineering
Textile World
Transit Journal

AVIATION SCHOOLS

AERONAUTICAL ENGINEERING — GROUND — MECHANICS — FLYING — INSTRUMENT

Be An AIRCRAFT INSTRUMENT TECHNICIAN

YOUR COUNTRY NEEDS YOU NOW AS A VITAL CIVILIAN SERVICE MAN

AFTER the WAR YOU WILL BE a LEADER in this NEW, UNCROWDED FIELD

Aircraft Instruments are as essential to an airplane as the fuel that makes it fly! The Aircraft Instrument Technician precision builds, installs, repairs and tests these VITAL instruments . . . . an indispensable, high paid job wherever a plane is built, serviced or repaired.

OUR GRADUATES ARE EMPLOYED BY THE AIRCRAFT INDUSTRY AND THE U. S. CIVIL SERVICE WITHOUT EXAMINATION.

U. S. GOV'T. APPROVED (CAA Lic. 1377) as an Instrument Repair Station . . . the largest in the East. Includes Sperry, Kollsman, Pioneer & Electrical Instrument Laboratories.
CONTRACTORS TO THE U. S. ARMY N. Y. STATE LICENSED

Investigate NOW the present and after war opportunities awaiting the Aircraft Instrument Technician . . . one of the HIGHEST PAID men in Aviation.

NEW YORK SCHOOL OF AIRCRAFT INSTRUMENTS
in the heart of the instrument industry

1860 BROADWAY (Cor. 61st) New York City, Dept. L, Circle 6-0345

AERONAUTICAL ENGINEERING
DEGREE IN 27 MONTHS

Qualify in Aeronautical Engineering at Indiana Tech. B.S. degree in 27 months. Competent instruction. Thorough, intense, practical program. New, modern Wind Tunnel, Prep courses without extra charge. Approved by Civil Aeronautics Authority for participation in Civilian Pilot Training Program. Aeronautical industry rapidly expanding. Companies need engineers. Enter December, March, June, Sept. Tuition and living costs low. Self-help opportunities. Also B.S. degree courses in 27 months in Chemical, Civil, Electrical, Mechanical, and Radio Engineering. Catalog and list of successful graduates on request.

INDIANA TECHNICAL COLLEGE
1012 East Washington Blvd., Fort Wayne, Ind.

SEE... School Advertising INDEX . . .
page 434
for additional schools and flying instruction.

Prepare for a Well Paid Career in—
AERONAUTICAL ENGINEERING!

DEGREE IN 27 MONTHS. Course provides thorough training for extraordinary opportunities in Government and industry. Modern wind tunnel, latest equipment.

SPECIALIZED COURSES geared to war needs. Approved by Civil Aeronautics Administration for primary and secondary flight training.

DISTINGUISHED also for courses in Civil, Electrical, Mechanical, Chemical and Radio Engineering; Business Administration, Accounting, Secretarial Science. Special preparatory department for those who lack required high school work.

DEMAND FOR TRI-STATE GRADUATES greater than supply. Cosmopolitan student body. Enter, Jan., March, June, Sept.

DEGREE IN 2¼ YEARS Write for catalog. 9122 COLLEGE AVE., ANGOLA, IND.

★ TRI-STATE COLLEGE ★ Founded in 1884 ★

Be An Instrument Technician and HOLD A STRAIGHT COURSE to Success In Aviation

The course of a career as an instrument technician is clearly marked. You can be confident of secure employment in war AND peace, plus steady advancement throughout a LIFETIME career.

Right at the start you have your choice of many good-paying positions. And instrument maintenance is ONE branch of aviation that is *permanent*. Future flight will *depend almost entirely* on a multitude of instruments for pilot, flight engineer, and navigator.

Be an instrument technician and be sure to get the things you want in aviation. Get complete information on many civilian openings in ALL branches of aviation. Send coupon NOW.

Largest staff of Instrument Instructors in America Trains A.S.A.I. Students

This large staff assures you of the careful personal instruction it takes to win the best starting positions and go on to success. Three courses—one all home study. Intensive, practical training. Get complete details NOW.

Contractor to U. S. Army Air Forces Technical Training Command

AMERICAN SCHOOL of AIRCRAFT INSTRUMENTS
Oldest Largest

CAA approved instrument repair station No. 1028
3903 SAN FERNANDO ROAD, Dept. A-12
GLENDALE (LOS ANGELES COUNTY), CALIFORNIA

Please send complete information on aircraft instrument careers, and on your specialized training courses.

Name_____ Age____
Address_____
City_____ State____ A-12

Copy for SCHOOL Advertising

received by December 21st will appear in the January issue; subject to limitations of space available.

ANNOUNCING CHANGE OF NAME

Atlantic
AVIATION INSTITUTE INC.
61-65 PROSPECT STREET
Trenton, N. J.
formerly LUSCOMBE
SCHOOL OF AERONAUTICS

Specializing in 4 Airplane Mechanics Courses—The same School—same location—same personnel—same thorough training. Only the name has been changed. Send for Free Folder.

1 Year Gov't Approved Master Mechanics Course. 8 Months' Gov't Approved Airplane Mechanics Course. 8 Months' Gov't Approved Engine Mechanics Course. 3 Months' Engine Mechanics Course.

ADVERTISERS IN THIS ISSUE

Acheson Colloids Corp. 172
Acme White Lead and Color Works.. 340
Acro Electric Company 427
Actus Products Corp. 286
Adel Precision Products Corp. 33
Aero Products 13
Aero Tool Company 275
Aeronca Aircraft Corp. 48
Aeroquip Corp. 178
Aircooled Motors Corp. 230
Aircraft Components, Inc. 225
Aircraft Mechanics, Inc. 225
Aircraft Publications 213
Aircraft Screw Products Co. 304
Aircraft Tools, Inc. 81
Airesearch Mfg. Co. 289
Air Reduction 86
Allegheny Ludlum Steel Corporation.. 229
Allied Control Co., Inc. 272-331
Allis Co., The Louis. ..... Insert 181-182
Aluminum Co. of America 76
American Automatic Electric Sales Co. 420
American Bosch Corp. 317
American Brass Co., The 334
American Chain and Cable Co., Inc.. 377
American Chemical Paint Co. 375
American Export Airlines 398
American Hammered Piston Ring 21
American Metal Hose 334
American Screw Co. 190
American Steel and Wire Co. 19
Ampco Metals, Inc. 417
Arens Controls, Inc. 418
Armstrong Bros. Tool Co. 425
Arnolt Motor Co. 426
Arter Grinding Machine Co. 412
Automatic Transportation Co. 28-29
Automotive & Aircraft Div. of American Chain & Cable Co., Inc. 377
Aviation Market Place 431-433
Aviation Engineering, Inc. 194
Aviation Equipment & Export, Inc.. 405

Baker Raulang Co., The 381
B. G. Corp. 72
Baldor Electric Co. 372
Barrett Equipment Co. 224
Bausch and Lomb Optical Co. 366
Beech Aircraft Corp. 318
Belden Mfg. Co. 362
Bell Aircraft Corp. ..... Insert 235
Bendix Aviation, Ltd. 242
Bendix Products 99
Bendix Radio Corp. 333
Berger Mfg. 58
Berry Brothers 51
Black and Decker Electric Co., The.. 49
Black and Decker Manufacturing Co.. 219
Bodine Electric Co. 168
Boeing Airplane Co. 10
Bonney Forge and Tool Works 299
Booth Felt Company 305
Boots Aircraft Nut Corp. ..... Insert 64
Bowser and Co., Inc., S. F. 422
Breeze Corp., Inc. 251
Brewster Aeronautical Corp. ..... Insert 200
Briggs Stratton Corp. 316
Bristol Co., The 190
Bullard Co., The 309
Bunting Brass and Bronze Co., The.. 59
Burcott Mills 429

Callite Tungsten Corp. 423
Camfield Mfg. Co. 367
Cannon Electric Development Co. 339
Carborundum Company, The 404
Cardox Corp. 400
Carnegie-Illinois Steel Corp. 19-281
Carpenter Steel Co. 197
Casein Co. of America 363
Cash Co., A. W. 36
Celanese Celluloid Corp. 65
Central Screw Co. 197
Chambersburg Engineering Co. 345
Champion Aviation Products Co. 428
Chandler Products Corp. 190
Cherry Rivet Co. 364
Chicago Metal Hose 322
Chicago Wheel and Mfg. Co. 351
Clare and Co., C. P. 426
Clark Jr. Electric Co., Jas. 336
Clarke Aero-Hydraulics, Inc. 428
Cleveland Pneumatic Tool Co., The.25-312
Columbia Steel Co. 19-281
Connecticut Hard Rubber Co., The... 220
Consolidated Aircraft Corp. 62
Continental Machines, Inc. 321
Continental Motors Corp. 68
Continental Screw Corp. 190
Corbin Screw Corp., The 190
Crescent Co., The 327
Criterion Paper and Twine Co. 413
Cuno Engineering Corp. 156-157
Curtiss Aeroplane Co. ..... Insert 63-199-236
Curtiss Pneumatic Machinery 205
Curtiss Propeller Co. ..... Insert 63-199-236
Curtiss Wright Corp. ..... Insert 63-199-236
Curtiss Wright Technical Institute 318

Darnell Corp., Ltd. 335
Denison Engineering Co., The ..... Insert 161-164
De Jur-Amsco Corp. 360
Delco Products 320
Delta Manufacturing Co., The 416
Dillon and Co., Inc., W. C. 422
Dole Valve Co. 394
Douglas Aircraft Co., Inc. 16
Dow Chemical Co., The ..... Third Cover
Drake Mfg. Co. 428
Driver Co., Wilbur B. 427
Dumore Co., The 54-55

Eclipse Aviation ..... Back Cover
Elastic Stop Nut Corp. 311
Electric Auto-Lite Co., The 30
Electric Storage Battery Co., The.... 378
Elwell-Parker Electric Co. 420
Emerson Electric Mfg. Co., The 77
Ethyl Corp. 370
Eutetic Welding Alloys Co. 302

Faber Inc., A. W. 88
Fafnir Bearing Co., The 66
Farnham Mfg. Co. 234
Farquhar Co., Ltd., A. B. 341
Federal Aircraft Works 429
Federal Bearings Co., Inc., The 12
Fenwal, Inc. 424
Fleetwings, Inc. 322-323
Foote Bros. Gear and Machine Corp.. 87
Formica Insulation Cable 18
Four Wheel Drive Auto., Co., The.266-267

Gardner-Denver Co. 210
General Aniline and Film Corp. 89
General Controls 286
General Electric Co. ..... Insert 43-46-254 255-314
General Engineering Co. 352
General Tire and Rubber Co., The.... 383
Goat Metal Stampings, Inc. 227
Goodyear Tire and Rubber Co., Inc., The 122-123
Govro-Nelson Co., The 424
Grob Brothers 428
Grumman Aircraft Engineering Corp. 365
Guardian Electric 231
Guardite Corp. 366
Guiberson Diesel Engine Co. 349
Gulf Oil Corp. 83

Hansen Mfg. Co. 292
Hardwick Hindle, Inc. 211
Harper Brothers 401
Hartzell Propeller Co. 372
Harvill Corp. 184
Hassall, Inc., John 371
Hayes Industries, Inc. 6
Hecker, A. W. 75
Hermsdorf Fixture Mfg. Co. 227
Holophane Co., Inc. 328
Howard Aircraft Corp. 262
Hubbell, Inc., Harvey 426
Hunter Electro-Copyist, Inc. 424
Huntington Precision Products 33
Hutton & Co., E. F. 248
Hycar Chemical Co. 52

Independent Pneumatic Tool Co. 84
Industrial Sound Control 412
International Flare-Signal 368
International Mutoscope Corp. 355
International Nickel Co., Inc. 391
International Screw Co. 190
International Telephone & Telegraph Corp 386
Interstate Aircraft & Engineering Corp 247
Irving Air Chute Co., Inc. 419

Jacobs Aircraft Engine Co. 8
Jacoel Cable Splicing Equipment Co., I. 429
Jefferson-Travis Radio Mfg. Corp. 32
Joyce Aviation Corp. ..... Insert 82

Kelley-Koett Mfg. Co., The 186
Kellogg Switchboard & Supply Co. 414
Kelite Products, Inc. 9
Keuffel and Esser Co. 310
Kidde and Co., Walter 79
Kilgore Mfg. Co. 368
Kinnear Mfg. Co., The 215
Kinkead Industries, Inc. 224
Koh-I-Noor Pencil Co., Inc. 424
Kold-Hold Mfg. Co. 195
Kollsman Instrument Div. of Square D. Co. 107
Koppers Co. 21

Laminated Shim Co., Inc. 204
Lamson and Sessions Co., The 190
Leland Electric Co. 418
Littlefuse, Inc. 425
Lockheed Aircraft Corp. 228
Lombard-Governor Corp. 411-300
Lord Mfg. Co. 337
Lunkenheimer Co., The 207
Lycoming Mfg. Corp. 50
Lyon Metal Products, Inc. 222-223
Lyon-Raymond Corp. 392

Mac Dermid, Inc. 344
Mallory and Co., P. R. 78
Martin Co., The Glenn L. 74
Martindale Electric Co. 372
Marquette Metal Products Co., The.. 60
McAleer Mfg. Co. 301
McDonnell Aircraft Corp. 11
McGraw-Hill Book Co. 413-421-423
McGraw-Hill Publishing Co. 408-409
McQuay-Norris Mfg. Co. 69
Meriam Co., The 17
Michigan Tool Co. 71
Micro-Switch Corp. 361
Miller Co., The 382
Miller Rubber Industrial Products.... 212
Mobile Refrigeration, Inc. 206
Murdock Mfg. Co. 342
Muskegon Piston Ring Co. 37

National Bronze and Aluminum Foundry Co. 192
National Screw and Mfg. Co., Inc.... 190
New England Screw Co. 190
Niagara Machine Tool Works 411
Nicholson File Co. 34
Norgren Co., C. A. 360
Norma-Hoffman Bearings Corp. 42
North American Aviation, Inc. 35
Northrop Aircraft, Inc. 279

Oster Mfg. Co., John 374
Ozalid Products 89

Packard Electric 324
Pan American Airways 402
Parker-Kalon Corp. 190-326
Pawtucket Screw Co. 190
Peck Spring Co. 415
Penn Metal Corp. of Penna. 209
Perkin-Elmer Corp., The 343
Pheoll Mfg. Co. 190
Phillips Screw Mfg. 190
Pioneer Instrument 4
Pioneer Parachute Co., Inc. 416
Piper Aircraft Corp. 7
Plastics Institute 347
Potter, Inc., L. 415
Poulsen-Nardon, Inc. 315
Pratt and Whitney Aircraft. ..... Front Cover
Preis Engraving Machine Co., H. P... 429
Pressed Steel Co., The 319
Presstite Engineering Co. 325
Prestole 359
Product Engineering Co. 329
Pump Engineering Service Corp.. Insert 217

Raymond Mfg. Co. 427
Remington Rand, Inc. 358
Republic Aviation Corp. 238
Reznor Mfg. Co. 227
Richardson Co., The 203
Roberts Rubber Co., Weldon 419
Roebling's Sons Co., John A. 38-39
Rohm and Haas Co. 15-296
Rohr Aircraft Corp. 350
Roller Bearing Co. of America 218
Romec Pump Co. 170
Roosevelt Aviation School 417
Rowe Industries, Inc. 429
Russell, Birdsall and Ward Bolt and Nut Co. 190
Ryan Aeronautical Co. 303
Ryerson and Son, Inc., Joseph T.... 193

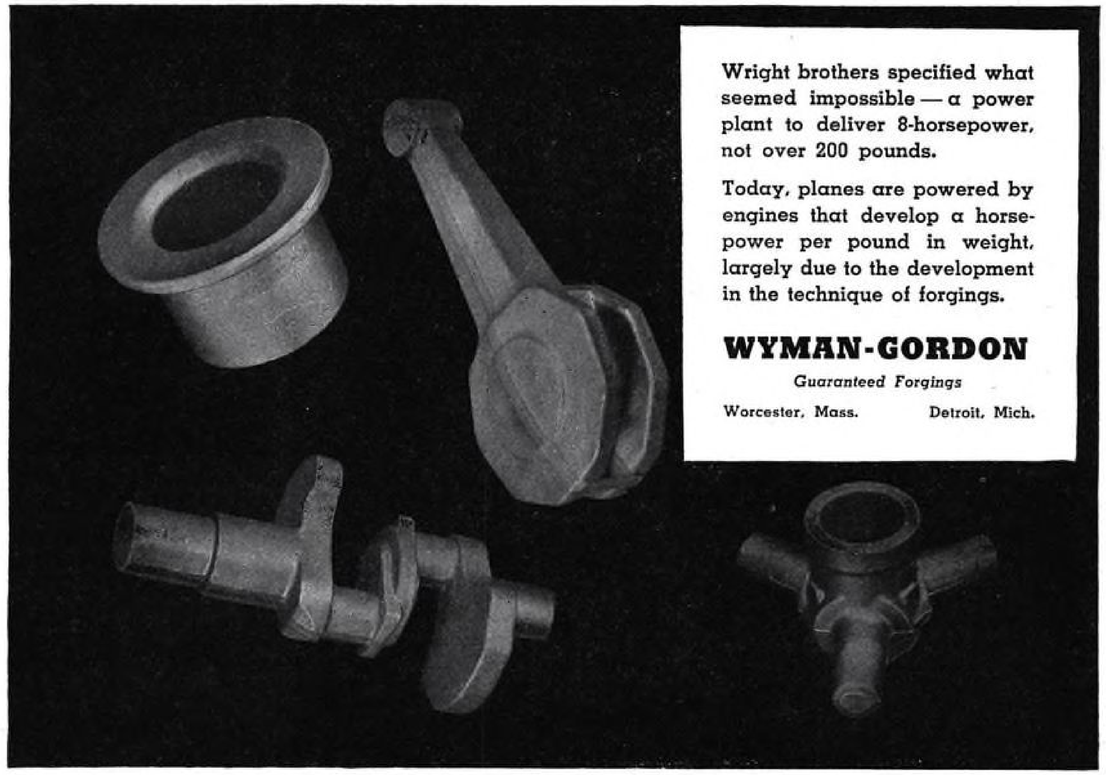

ADVERTISERS IN THIS ISSUE

Schatz Mfg. Co., The 387
Schrader's Son, A. 403
Scott Aviation Corp. 294-295
Scovill Mfg. Co. 190
Sealed Power Corp. 61
Shakeproof, Inc. 26-27-190-264-265
Sheffield Corp. 226
Shell Oil Co., Inc. 346
Signal Electric Mfg. Co. 425
Simmonds Aerocessories, Inc. 389
Sinclair Refining Co., Inc. 384
Snap-On Tools Corp. 57
Solar Aircraft Co. 70
Solo Products Corp. 187
South Bend Lathe Works 80
Southern Engineering Co., Inc. 32-33
Southington Hardware Mfg. Co. 190
Southwest Airways 290
Sparks Machine Tool Corp. 306
Spartan Aircraft Co. 53
Spartan School of Aeronautics 14
Spencer Thermostat Co. 406
Sperry Gyroscope Co., Inc. 85
Spreisch Tool and Mfg. Co., Inc. 385
Square D Co.—Kollsman Instrument Div. 107
Staedtler, Inc., J. S. 355
Staley Mfg. Corp. 348
Standard Aircraft Products, Inc. 40-41
Standard Pressed Steel Co. 20
Sterling Tool Products Co. 427
Stewart-Warner Corp. 24
Suncook Mills 396
Sunnen Products Co. 202
Switlik Parachute Co. 369
Synthane Corp. 313

Tannewitz Works, The 436
Taylor Fibre Co. 56
Tenney Engineering, Inc. 397
Terry Co., George A. 376
Testor Chemical Co. 371
Texas Company, The 128
Thomas & Betts Co., The 67
Thompson Products, Inc. ..... Second Cover
Thurston, W. Harris 380
Timken Roller Bearing Co., The 144
Tinnerman Products, Inc. 195
Titanine, Inc. 429
Torrington Co., The 284
Triplett-Barton, Inc. 388
Tubing Seal-Cap, Inc. 283
Turco Products, Inc. 376

United Aircraft Corp. ..... Front Cover & 268
United States Electrical Tool Co., The 308
United States Rubber Co. 76
United States Steel Corp. Subsidiaries 19-281
United States Steel Export Co. 19-281
United States Testing Co., Inc. 393
U. S. Hammered Piston Ring Co., Inc. 422

Vard, Inc. 260
Veeder-Root, Inc. 414
Verson All-Steel Press Co. 407
Vickers, Inc. 177
Victor Equipment Co. 280
Vokes, Ltd. 390
Vought-Sikorsky Aircraft 268

Walker-Turner Co., Inc. 357
War Savings Bonds 410
Ward Leonard Electric Co. 424
Weatherhead Co., The 330
Wellington Sears Co. 395
Wellman Bronze and Aluminum Co.. 354
Where To Buy 429
Whitehead Stamping Co. 428
Whiting Corp. 338
Whitney Chain and Mfg. Co., The.... 47
Whitney Screw Co. 190
Williams and Co., J. H. 426
Wilson Co., H. A. 399
Wilson Welder and Metals Co., Inc... 22-23
Wittek Mfg. Co. 174
Wolfe and Mann Mfg. Co., The 73
Worthington Mower Co. 373
Wright Aeronautical Corp. ..... Insert 63 199-236
Wyman Gordon 435

Young Radiator Co. 421

★ ★ ★

SCHOOLS

American School of Aircraft Instruments 433
Atlantic Aviation Institute, Inc. 433
Curtiss Wright Technical Institute 31
Indiana Technical College 433
New York School of Aircraft Instruments 433
Plastic Institute 347
Roosevelt Aviation School 417
Spartan School of Aero 14
Tri-State College 433

AVIATION'S MARKET PLACE

(CLASSIFIED ADVERTISING)

BOOKS 432

EMPLOYMENT (Positions Wanted and Vacant) 430-431
EQUIPMENT & PRODUCTS 430
FOR SALE (Used Planes) 430-432
PROFESSIONAL SERVICES 431
INDEX of Planes, Engines and Parts For Sale 430

(CLASSIFIED DISPLAY ADVERTISING)

Lancaster, Allwine & Rommel 431
Pan American Navigation Service 432
Pester's Propeller Service 432
Philadelphia Rust Proof Co. 432
Schofield's 432
Simmonds Aerocessories, Inc. 431
Snyder Aircraft Corp. 432
Standard Aircraft Equipment Co. 432

DO IT FASTER-BETTER-AT LESS COST!

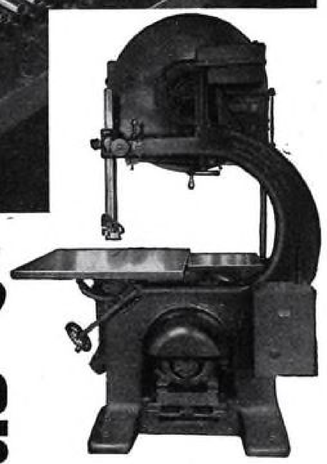

WITH *Tannewitz* HIGH SPEED BAND SAWS

Fastest known method of cutting sheet steel and non-ferrous metals . . . formed or flat!

Shown above is one of several TANNEWITZ HIGH SPEED BAND SAWS at the Bell Aircraft Corporation demonstrating one of the hundreds of cutting jobs for which these machines have proven vastly superior. With saw blades traveling better than two miles per minute they slip through mild steel sheets or non-ferrous metals formed or flat with the greatest of ease. Built by sawing machinery specialists, these machines are in perfect balance, operate without vibration, are equipped with automatic hydraulic brakes, "speedi-change" tires and a number of other patented features shared with no other band saw—great production expediters as demonstrated in hundreds of outstanding production plants.

For complete details write for: High Speed Metal Cutting Band Saw Bulletin.

Standard High Speed Band Saw—available with 36" or 42" wheels.

VARIABLE SPEED BAND SAWS

—particularly advantageous for cutting off gates and risers of castings of any metal. Available in sizes to handle castings of practically any size. Write for "VARIABLE SPEED BAND SAW" Bulletin.

DI-SAWS FOR WORK OF ANY SIZE

—They do in minutes jobs which otherwise require hours. Sizes range from our standard 24" throat to 48" capacity. Write for DI-SAW Bulletin.

THE TANNEWITZ WORKS, GRAND RAPIDS, MICHIGAN

DOW

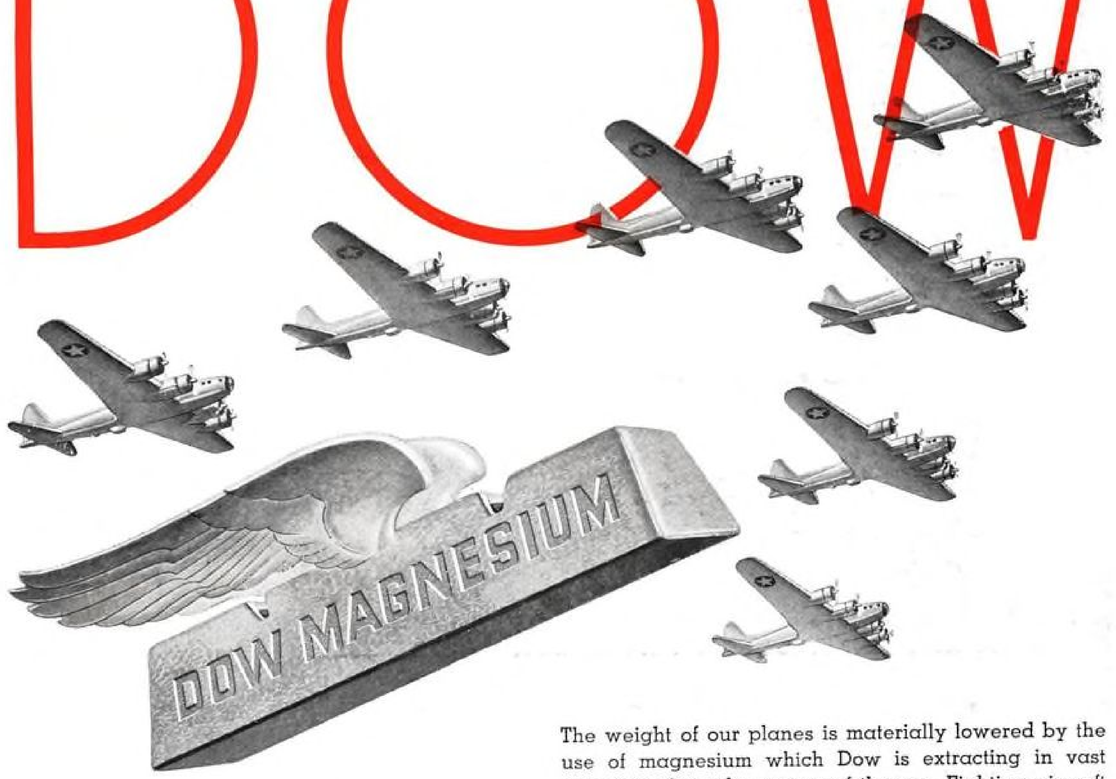

The weight of our planes is materially lowered by the use of magnesium which Dow is extracting in vast quantities from the waters of the sea. Fighting aircraft fly faster and farther by virtue of this strategic weight-saving metal. The social effect of wide-scale applications of magnesium will be fully realized only when Victory releases it for unrestricted peacetime uses.

THE DOW CHEMICAL COMPANY, MIDLAND, MICHIGAN

TRADE DOWMETAL MARK

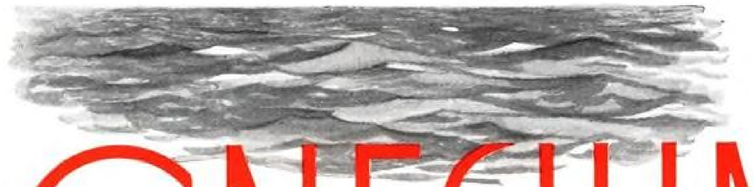

MAGNESIUM

The Lightest Structural Metal . . . A Full Third Lighter Than Any Other in Common Use

KEEP 'EM FLYING
with *Eclipse*
Aircraft Accessories

"Republic Fighter"

RESPECTED for its rocket speed and fighting brawn, this snub-nosed contribution of Republic Aviation Corporation is capable of high altitude attack backed by devastating fire power. A symbol of American design and production ingenuity, it supplements the growing strength of the United Nations "Airmadas."

Through the extreme demands of aerial combat, "ECLIPSE" Aircraft Accessories now serving fighting crews on every Allied front, are upholding the Eclipse tradition of performance. Dependable and efficient, they are daily going forward in ever-increasing quantities as our contribution to Victory.

"ECLIPSE" products used by Republic and other Manufacturers

Hand and Electric Inertia Starters, Starter Energizers, Battery Booster Coils, Solenoid Starting Relays, Solenoid Engaging Devices, Solenoid Actuating Devices, Solenoid Battery Circuit Breaker Switch, Generators, Generator Control Boxes, Generator Filter Boxes, Propeller Anti-Icer Pumps, Air Valves, Fluid Check Valves, Retracting Motors, Supercharger Regulators, Ammunition Rounds Indicators.

ECLIPSE AVIATION DIVISION, Bendix, N. J.

COPYRIGHT 1942,
BENDIX AVIATION CORPORATION

Products of the Eclipse Aviation Division are important members of "The Invisible Crew" . . . precision instruments, controls and accessories which 25 Bendix plants from coast to coast are speeding to our fighting crews on world battle fronts.

THE INVISIBLE CREW
PRECISION EQUIPMENT BY
Bendix
AVIATION CORPORATION

FOR DEPENDABLE OPERATION, IT PAYS TO FLY "ECLIPSE" EQUIPPED