NOVEMBER 1943
50 CENTS PER COPY

AVIATION

The Oldest American Aeronautical Magazine

IN THIS ISSUE

LET'S BE CALM ABOUT THE HELICOPTER
— Too much ballyhoo can ruin the prospects of a good thing.

★

FEEDER AIRLINES IN POSTWAR AMERICA
— An analysis of problems and realistic appraisal of the future by a veteran operator.

★

TROOP GLIDERS IN QUANTITY
— West Coast associate producers system for efficient glider production.

★

AUTOMATIC ENGINE CONTROLS
— Detailed description of development and operation of Simmonds simplified engine controls.

★

NEW DE-ICER SYSTEM WITH ELECTRONIC CONTROL
— Highly flexible system developed by Bendix to meet critical de-icing needs.

★

FIX-IT PLANTS ASSURE SMOOTH PRODUCTION
— Plant-within-a-plant at Consolidated Vultee nips production jams before they begin.

★

ENGINEERS MADE TO ORDER
— Vega's special schooling fills needs for skilled personnel.

★

WORLD AIRWAYS PIONEERS UNDER OTHER FLAGS
— The British have long pioneered and will have strong claims on air routes.

McGRAW-HILL
PUBLISHING COMPANY, INC.

Blitz for Blitz

From July 1 to October 1, 1940, the enemy dropped 18,900 tons of bombs in England. In July 1943 alone, allied bombers dropped 26,000 tons on Germany. Consolidated B-24 Liberators, carrying up to ten tons each, were in the forefront of the attack, powered by dependable Pratt & Whitney "Twin Wasp" engines.

PRATT & WHITNEY AIRCRAFT
EAST HARTFORD, CONNECTICUT
ONE OF THE FOUR DIVISIONS OF UNITED AIRCRAFT CORPORATION



SPEED NUTS have become industry's universal fasteners because:

1. They do not shake loose with vibration.
2. They reduce weight and conserve critical metal.
3. They are applied faster and conserve war manpower.
4. They lower net assembly costs.

Month after month, tons of critical material and countless man hours assembly time are being saved by conversion to spring steel SPEED NUTS. The faster this conversion is expanded the quicker SPEED NUTS will pay you even bigger dividends. In writing for samples, kindly give engineering details to expedite quick selection of SPEED NUT adapted to your needs.

TINNERMAN PRODUCTS, INC. • 2070 Fulton Road, Cleveland, Ohio

In Canada: Wallace Barnes Co., Ltd., Hamilton, Ontario

In England: Simmonds Aerocessories, Ltd., London



November, 1943

Volume 42 • No. 11

CONTENTS

Briefing for November ... 5

Down the Years in Aviation's Log ... 5

Editorial: Headlines — Or Education? ... 111

Aviation's War Communique No. 23 ... 112

Let's Be Calm About the Helicopter ... *Lou Leavitt* 114

The Feeder Airlines' Place in Postwar America ... *James G. Ray* 116

Design for Survival ... *John Foster, Jr.* 118

Cancellation Demands Action—And Quick! ... *Raymond L. Hoadley* 119

Aviation Manufacturing

Associate Producers Plan Speeds CG-4A Gliders ... *Otto W. Timm* 121

Engine Control Achieves Simpler Piloting ... *William J. Morrison* and *A. P. Fraas* 132

Prescriptions for Head Cracks in 24ST Rivets ... *E. C. Hartmann, C. F. Westcoat,* and *M. W. Brennecke* 139

Manifold Solenoid De-Icer Systems with Electronic Control ... *M. L. Taylor* and *W. B. Pond* 144

Aircraft Production Analysis—Key to Assembly Line Efficiency, I ... *Loren F. Dorman* 148

Analysis of Members With Variable Moments of Inertia ... *Yves Nubar* 153

Plant Power—Minus the Bottlenecks ... *W. D. Drummond* 157

This Plant-Within-Plant Assures Peak Production ... 161

Engineers Made to Order ... *E. V. Gustavson* 167

Noorduyn Production Time-Savers ... *James Montagnes* 171

Where Are Those Dividends? ... *H. L. Federman* 190

Aviation's Sketch Book of Design Detail ... 177

Aviation's Engineering Data Book ... 183

Review of Patents ... *A. Harry Crowell* 189

New Products and Practices ... 233

Air Transport

They Skyblazed Africa and the East "Way Back When" ... 196

Make Your Reservations Early ... 199

Maintenance

How AA's Propeller Shop "Keeps 'Em Turning" ... *Edward E. Thorp* 205

Aviation's Maintenance Notebook ... 211

Military

Canada Trains Them by Tens of Thousands ... *Janet R. Keith* 219

Piloting Big Bombers is Big Business (Building the AAF, IV) ... 223

Flying Equipment

"Old Lady in a New Dress" ... 226

PV-2 Helicopter Makes First Public Flight ... 229

Civil Operation and Training ... 231

Side Slips ... 193

The Aviation News

National Aviation ... 261

Washington Windsock ... 263

Calling Names ... 264

Aviation Manufacturing ... 266

Transport Aviation ... 270

Aviation Abroad ... 273

Financial Notes ... 275

Aviation People ... 276

Book Reviews ... 277

George W. Pfeil ... *Publisher*
Leslie E. Neville ... *Editor*
E. Eugene Miller ... *Managing Editor*
John Foster, Jr. ... *Associate Editor*
Herb Powell ... *News Editor*
Raymond Hoadley ... *Financial Editor*
Wm. R. Nelson ... *West Coast Editor*
Blaine Stubblefield ... *Washington Editor*
Dallas Mallard ... *Art Director*
Paul Wooton ... *Chief of Washington Bureau*

★ ★ ★

On Leave of Absence With Government Services

Carl Norcross ... *Lt. Colonel, Air Forces*
Jay P. AuWerter ... *Captain, Air Forces*
Charles F. McReynolds ... *Captain, Air Forces*
Randolph Hawthorne ... *Lieut., Air Forces*
Kenneth D. Reynolds ... *Lieut., Infantry*
David Baker ... *Private, Air Forces*
Don Fink ... *Special Assignment*
Selig Altschul ... *Special Assignment*

★ ★ ★

District Managers: New York and Boston, Robert F. Boger; Philadelphia, G. A. Ahrens and E. M. Schellenger; Cleveland, A. H. Bartsch and E. O. Wayne; Detroit, C. W. Evaul; Chicago, A. E. Meanor and W. H. Aaron; Los Angeles, E. W. Potter; San Francisco, John Otterson

McGRAW-HILL PUBLISHING CO., INC. Publication office 99-129 North Broadway, Albany, N. Y. **Return postage guaranteed. Editorial and executive offices, 330 West 42nd Street, New York, 18, N. Y.** Branch offices: Chicago, 520 North Michigan Ave.; San Francisco, 68 Post Street; Aldwych House, Aldwych, London, W.C. 2; National Press Bldg., Washington; 16 South Broad St., Philadelphia; Hanna Bldg., Cleveland; 2-144 General Motors Bldg., Detroit; Continental Bldg., St. Louis; 1427 Statler Bldg., Boston; Rhodes-Haverty Bldg., Atlanta; 601 W. 5 St., Los Angeles. JAMES H. McGRAW, Founder and Honorary Chairman; JAMES H. McGRAW, Jr., President, HOWARD EHRLICH, Executive Vice-President; MASON BRITTON, Vice-President; CURTIS W. McGRAW, Vice-President and Treasurer; JOSEPH A. GERARDI, Secretary; J. E. BLACKBURN, Jr., Director of Circulation. Aviation, 330 W. 42nd Street, New York. Published monthly, price 50c a copy, 50c in Canada. Allow at least ten days for change of address. All communications about subscriptions should be addressed to Director of Circulation, 330 West 42nd Street, New York. Subscription rates—United States, Mexico and Central American Countries, $3.00 a year, $4.00 for two years, $5.00 for three years. Canada, $3.50 for one year, $5.00 for two years, $6.00 for three years, payable in Canadian currency at par. Great Britain and British Possessions 30 shillings per year, 60 shillings for three years. All other countries $3.00 a year, $10.00 for three years. Entered as second-class matter September 3, 1930, at the Post Office, Albany, New York, under the Act of March 3, 1879. Volume 42, Number 11. Printed in U. S. A. Cable address: "McGrawhill New York." Member A.B.C.

Copyright 1943 by McGraw-Hill Publishing Company, Inc., 330 West 42nd Street, New York, N. Y. The contents of this issue are copyrighted and may not be reproduced without the permission of the copyright owner. The following publication is combined with AVIATION: AERONAUTICAL ENGINEERING AIRCRAFT JOURNAL. All rights to this name are reserved by the McGraw-Hill Publishing Co.

Aviation is indexed in Guide to Periodical Literature and in Industrial Arts index.



THE steel of this cam gleams like a mirror, as it gets its final buffing at the end of the production line. And it is not too fantastic that it should reflect the drama of battle in the skies. For those who work on Bendix-Scintilla* Aircraft Magnetos know well that this is a fight to the finish... even to the "finish" of a single steel surface.

America's mastery of the skies starts with superior engineering in every vital aircraft part... but it goes on from there to unsurpassed precision in every manufacturing detail. Especially in the Aircraft Magnetos that supply our warplanes with the very spark of life, creative engineering must go hand in hand with vigilance at every stage.

Bendix-Scintilla has accomplished many major developments in Aircraft Ignition... improvements that go far to make our Vehicles of Victory stand out already as the Transports of Tomorrow. But the firing line is still the final test... of magnetos, as of men. And Bendix-Scintilla will carry on, unrelentingly, its own special "fight to the finish."



THE WORLD'S FINEST AIRCRAFT IGNITION

Bendix-Scintilla Aircraft Magnetos, Harnesses and Switches, vital members of "The Invisible Crew," are standard equipment for the major aircraft engine manufacturers, including:

Allison • Jacobs • Continental • Lycoming • Lawrance • Wright Aero Corp. • Pratt & Whitney • Warner • Packard • Ranger • Ford • Nash • Chrysler • Kinner.

SCINTILLA MAGNETO DIVISION

THE INVISIBLE CREW
Precision Equipment by
Bendix Aviation Corporation

*TRADE MARK OF BENDIX AVIATION CORPORATION

Briefing for November

"Let's take some of the blood and thunder out of our aviation stories." So says the Editor in suggesting that before aviation becomes labeled as a "merchant of death" industry by political opportunists, the people should be reminded that this woefully unprepared nation staved off immediate defeat through its diminutive but remarkably employed air power, and that it will achieve victory at a cost, in American lives, inversely proportional to the aviation industry's production. The editorial, Headlines—Or Education?, on page 111 is a timely guide to sound public relations.

Notice to Aviation Suppliers

If you were not included in AVIATION'S Annual Directory for 1943, please write now for necessary forms for inclusion in the 1944 Directory.



James G. Ray, vice-president of Southwest Airways, a real aviation veteran and a successful operator of feeder airlines, has the practical experience to give a realistic appraisal of feeder service prospects. Turn to page 116 for his thorough discussion of The Feeder Airlines' Place in Postwar America.

"Have you a little helicopter in your home? It's the newest thing for dishwashing, fishing, lawn-mowing—and incidentally, it's a flying machine, too! Get one for Junior instead of a Kiddie Kar!" Thus is heralded the helicopter—and just as easily may aviation progress be retarded. Read what Lou Leavitt has to say on page 114. And then, for heaven's sake, Let's Be Calm About the Helicopter.

The "glider program" has had its ups and downs, but the fabrication of gliders has been a spectacular achievement—and it is still in full swing. How eleven California manufacturers with varied experience pooled their equipment to turn out CG-4A gliders fast and efficiently is a production story without which the record of American ingenuity would stand incomplete. Otto W. Timm describes the Associate Producers Plan on page 121.

Every successful development in simplified controls represents a milestone in aviation progress. The Simmonds automatic power plant control is notable in this category. It is described in detail beginning on page 132.

From the Alcoa laboratories comes another invaluable study, this time with respect to head cracks in 24ST rivets. Data on strength, corrosion resistance, heat treatments, and aging comprise this latest guide for designers and fabricators. Page 139.

Trouble with icing is its erratic formation. To combat it, de-icing equipment must be flexible both in design and control. The new Bendix manifold-solenoid system with electronic control, a marked step forward in this hard battle, is described on page 144.

The American aviation industry has astonished the world with its aircraft production rate. Efficient line assembly methods are responsible, and a basic discussion of the underlying principles of these methods are set forth in Aircraft Production Analysis beginning on page 148.

In concise form is presented data for analyzing members with varying moments of inertia on page 153.

Electric power is the lifeblood of our aircraft plants. An electrical distribution system must be highly dependable to maintain production. A model plant, installed at one of Wright Aeronautical's Ohio plants, is described on page 157.

"For the want of a nail —" just doesn't happen at Consolidated Vultee. "Little CV" is a plant-within-a-plant which can salvage, repair, or build anything—to prevent production jams before they begin. See page 161.

Engineers just can't be bought anymore —so they must be built. Vega's production line to make them to specifications is described on page 167.

Americans have shouted loudly about pioneering airways which now stand the military in good stead. In thinking about what's what in the postwar airways scramble, don't overlook the fact that pioneers have flown under other flags. See page 196.

Down the Years in AVIATION'S Log

25 Years Ago (1918)—To reduce fatalities resulting from defective workmanship in planes and plane engines, government inspectors will be required in the future to make initial trips in machines they have passed . . . Capt. R. W. Schroeder, A.S., sets new altitude record of 29,800 ft. in Bristol two-seater powered with 300 hp. Hispano-Suiza engines. . . . Announcement is made by Post Office that proposed airmail route between New York and Chicago will be inaugurated in December.

15 Years Ago (1928)—Mussolini gives permission for U.S. production of Savoia-Marchetti airplanes. . . .Long Island Aviation Country Club, Inc., establishes first of planned nationwide chain. . . . Capt. C. B. D. Collyer flies Lockheed *Vega* (the *Yankee Doodle*) coast-to-coast in 21 hr. 51 min. beating record by 1 hr. 59 min. . . . Curtiss sells Chile 18 observation and 9 pursuit planes. . . . Nine Cincinnati newspaper men take aviation course to improve understanding of subject. . . . PAA announces new air-rail service, New York to Havana. . . .


10 Years Ago (1933)—Congress appropriates $3,300,000,000 for airport building by PWA. . . . Germany substitutes fast freight planes for freight trains to East Prussia. . . . Lt.-Col. Casinelli, Italian Army, flies 100 km. at 393 mph. . . . French aviator, Gustave Lemoin, makes altitude record of 44.822 ft. . . . Soviet balloon *Stratostat U.S.S.R.* rises to 62,300 ft. (11.8 mi.). . . . Wedell flies 615 mi. (N.Y.C. to Cincinnati) in 2 hr. 40 min. . . . Flight Lt. Chas. T. P. Ulm flies from England to Australia in 6 days 18 hr. . . . First flying sleeper lands in Newark from Atlanta. . . . Tractor dealer in New Mexico boosts sales during depression by using airplane. . . . New Guinea goldminers fly in dredge machinery over jungles. . . . Panagra ships 2,000 hp. hydroelectric equipment over 19,000-ft. Andes.

The ROTAMETER

—its basic advantages over head-type meters

8 BASIC ADVANTAGES

1. Metering elements and fluid being metered clearly visible
2. Wide flow range—20-to-1 easily obtained
3. Evenly spaced scale divisions—no compression of scale at low flows
4. Low, constant pressure drop—reduces pumping costs
5. New Stabl-Vis rotameter compensates for viscosity and density variations
6. 10" to 24" travel of metering float—accuracies correspondingly high
7. Instantaneous response to flow change—no friction or hysterisis
8. Measures corrosive gases, liquids and slurries that no other meter will handle accurately

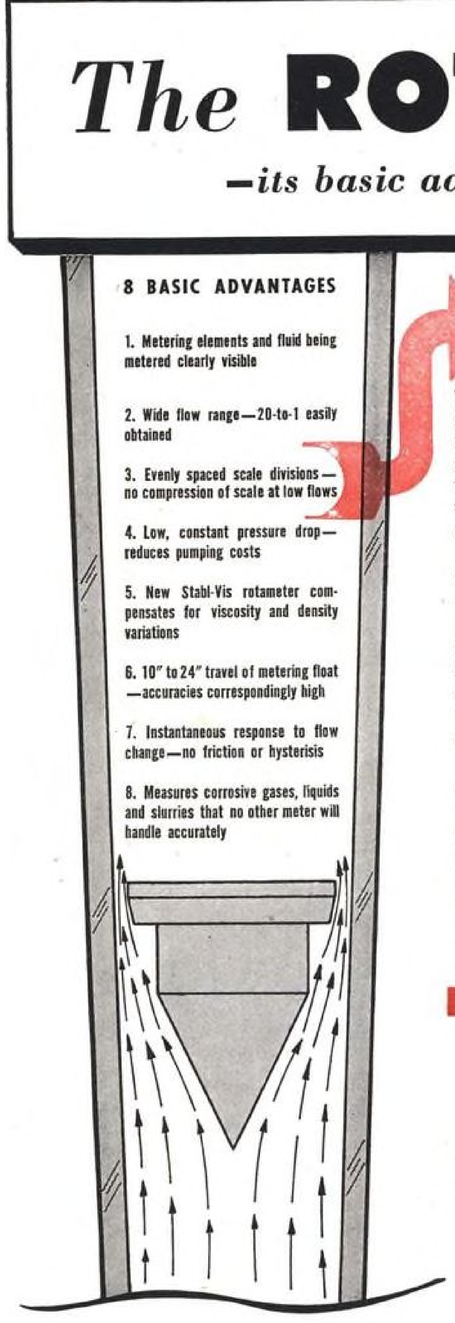

E-V-E-N-L-Y spaced scale divisions

The big advantage of the linear calibration of the rotameter is apparent when you are operating in the lower portion of its range. The scale divisions at low flows are just as far apart as at high flows. Low flow rates may therefore be set or read with the same high accuracy. This feature of the Rotameter, which makes it of such great help in controlling process flows closely, can be scientifically explained as follows:—

In Toricelli's fundamental flow equation, $Q=CA\sqrt{2gh}$, the area-type meter (rotameter) measures by varying the value of "A" (area of flow passage) whereas head-type meters (fixed orifices) vary the value of "h" (head). Thus, the rotameter "gets out from under the square root sign" which results in a linear calibration scale, instead of a square root scale with crowded divisions at the lower end. Consequently with the rotameter the same high accuracy of reading or of setting the flow rate may be obtained over the entire flow range.

The rotameter's straight line calibration curve is but one of its many advantages as a flow rate instrument. These advantages are rapidly causing instrument and operating engineers to replace fixed orifice meters by the rotameter in many important metering applications. The full details are told in a comprehensive and highly interesting booklet just printed, entitled "A New Era in Flow Rate Measurement." Large illustrations and a modern cartoon style make it easy and instructive reading. We will gladly send you this pamphlet without obligation—write us if you wish a free copy.

FISCHER & PORTER PRODUCT INFORMATION

Aviation's latest sensational flight instrument—

The MAGNA-BOND
Remote-reading fuel flow meter!

A remote-reading fuel flow meter for bombers that weighs only 4 pounds and that compensates automatically for *viscosity* and *density* changes in the fuel being metered. Such is aviation's latest remarkable instrument for long-distance flying efficiency. So new that bulletins are not yet off the press—but write and we will send you full information.



You will be able to see our latest developments at BOOTH 304-306—CHEM. SHOW, NEW YORK—DEC. 6 to 11.

FISCHER & PORTER CO.

311 COUNTY LINE ROAD, HATBORO, PA.

RATE OF FLOW INDICATING, RECORDING OR CONTROLLING ROTAMETERS FOR ANY LIQUID OR GAS



FOREST PATROL!

Every day the CAP Forest Patrol assists the U. S. Forest Service and the National Park Service . . . flying over America's vast forests, guarding them from sabotage, accident, negligence and the ravages of nature.

Piper Cub planes play no small part in this important Civil Air Patrol work. These dependable, maneuverable planes fly the valleys and spot blazes that cannot be seen by lookout towers until they become out of control. These blazes are reported while they are still one-man or two-man affairs.

Thus, while Piper Cub L-4 "Grasshopper" planes serve America on the battle fronts, other Piper Cub planes do vital work on the home front.

And, the wartime advantages of Piper planes will serve you in peacetime. Then you'll fly your smart, new Piper Cub on vacation and business trips with ease, pleasure, safety and economy.




FREE BOOKLET ON HOW TO FLY. Send today for your copy of "You, Too, Can Fly!" If you also want the full-color Piper catalog, enclose 10c in stamps or coin for postage-handling. Piper Aircraft Corporation, Dept. A113, Lock Haven, Penna.

16mm. SOUND FILM—"The Construction of a Light Airplane." For distribution points write: Supervisor, Audio-Visual Aids, Extension Services, Penna. State College, State College, Penna.

PIPER *Cub*

Points the Way to Wings for All Americans

Trail Blazing in the Skies

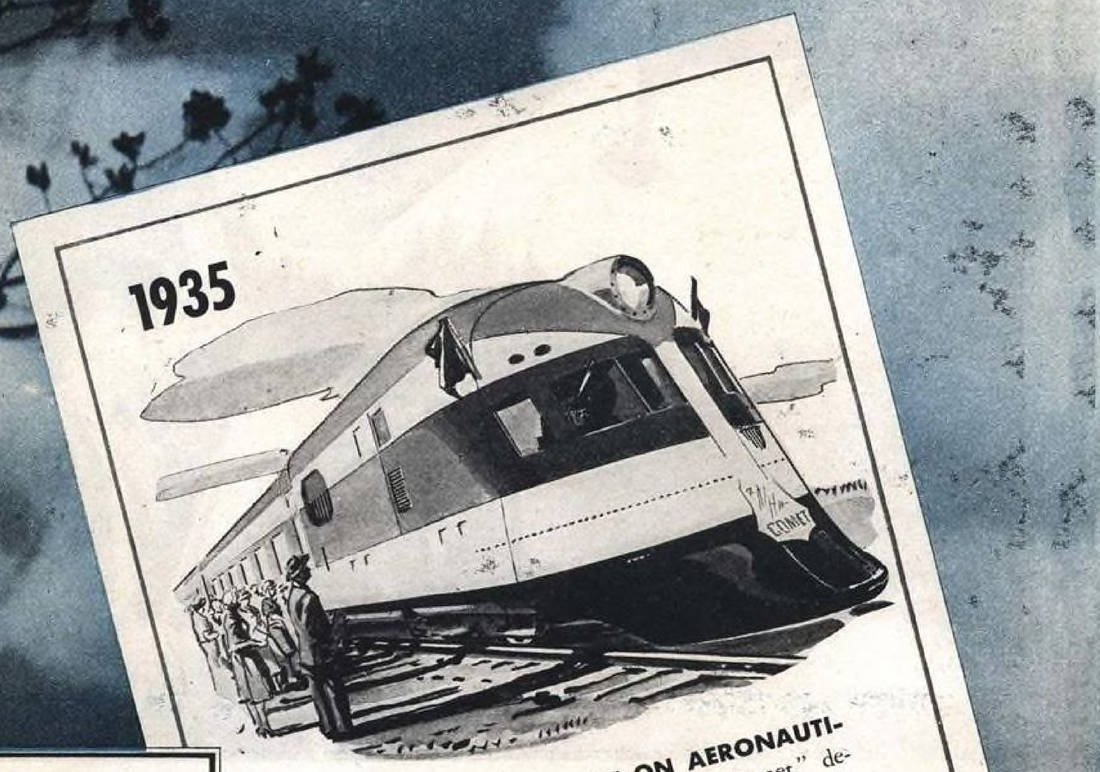

FIRST STREAMLINER BUILT ON AERONAUTICAL PRINCIPLES was the famous "Comet," designed and fabricated by Goodyear's Aircraft division in 1935 for the New York, New Haven & Hartford Railroad. In the Comet, lightness-with-strength was achieved by designing roof, sides and floor of the cars as main load-carrying elements of the structure — the same stressed-skin or monocoque construction widely used in aircraft. This undertaking was part of Goodyear's early work in exploring the possibilities of light aircraft metals that contributed to the development of the superior alloys in use today.

HOW GOODYEAR AIRCRAFT CORPORATION SERVES THE AIRCRAFT INDUSTRY

1. *By constructing subassemblies to manufacturers' specifications.*
2. *By designing parts for all types of airplanes.*
3. *By re-engineering parts for mass production.*
4. *By extending our research facilities to aid the solution of any design or engineering problem.*
5. *By building complete airplanes and airships.*



METALCRAFTING EXPERIENCE THAT STREAMLINES MANY PRODUCTION PROBLEMS. As a result of its long experience in aeronautical design and light-metal fabrication, Goodyear is today one of the largest producers of subassemblies, for all types of aircraft. These include complete empennages and wing panel assemblies, and all their component parts, cabin structures, floats, and float mechanisms—for both "hot" fighters and heavy bombers. And in addition Goodyear is one of the producers of the Corsair — a fact that bespeaks Goodyear's ability to handle complete and intricate production problems on a large scale.

Back the attack with WAR BONDS

GOODYEAR
AIRCRAFT

WHAT'S NEW IN RUBBER FOR AMERICAN AIRCRAFT

THIS MODERN LIFESAVER





1919—rubber life raft (arrow) carried on balloon

was first built for racing balloons

THE amazingly seaworthy rubber life rafts that have saved so many airmen in this war, had their beginning on Goodyear racing balloons a quarter century ago. From these first rafts, carried inflated, lashed to the balloon rigging, came the inspiration for the modern self-inflating type first supplied by Goodyear to the Army and Navy. Today as a result of wartime experience, these craft are equipped with many new innovations to ease the castaways' lot. But most important of all is the rugged, sturdy workmanship that endows these rafts with strength to withstand buffeting seas for weeks. The life raft in which Captain Rickenbacker and his companions were rescued after 21 days afloat was Goodyear-built — as was that on which the heroes of "The Raft" sailed for five weeks.

Pliofilm, Airwheel—T.M.'s The Goodyear Tire & Rubber Company



BEST IN BRAKES


The famous Goodyear hydraulic disc brake is universally used today on all types of airplanes because of its high efficiency and dependability. That is the reason it is used on some of the largest new superbombers and cargo ships now being built—its tremendous reserve power insures safe, quick, smooth stops in comparatively short distance.

KEEPS OUT MOISTURE GREMLINS



All American military aircraft engines are now sealed in a dehydrated atmosphere without grease-packing, in moisture-vapor-air-tight envelopes of Pliofilm, supplied by Goodyear. Pliofilm's ability to seal out corroding moisture makes it the perfect shipping package for all parts and instruments requiring such protection.

A TIRE FOR EVERY NEED



Goodyear's line of airplane tires is complete with specially designed casings and tubes for all types of service — Airwheel, Intermediate, Streamline, Smooth Contour, High Pressure, Channel Tread, Ice-Grip and all styles of tail-wheel tires, both pneumatic and solid. Built with cotton, rayon and nylon carcass construction, depending on service requirements.

OUR ENGINEERS ARE AT YOUR SERVICE



With a background of more than 30 years' experience in developing tires, tubes, wheels, brakes and other aircraft accessories, Goodyear engineers are ready to help you work out any problem involving such products, particularly those made of rubber—either natural or synthetic. Address: Goodyear Aeronautics Dept., Akron 16, Ohio, or Los Angeles 54, California.

Back the attack with WAR BONDS

GOODYEAR

THE GREATEST NAME IN RUBBER

AERONAUTICAL RUBBER GOODS — TIRES — TUBES • WHEELS • BRAKES

CHAMPION SPARK PLUGS

are rapidly gaining favor in all branches of aviation due to certain inherent superiorities in performance and dependability, directly traceable to their specially developed ceramic insulation.



C26S—Shielded





C26—Unshielded


Champion Ceramic Aircraft Spark Plugs, like all Champions, have a reputation for making every engine a better performing engine.

For the most advanced, high output, turbo supercharged, high altitude engines or low output engines for "grasshoppers" Champion Spark Plugs are available in types and sizes specially qualified to give maximum performance and dependability.

The same special ceramic insulation is used in all Champion aircraft spark plugs. It has the following exclusive characteristics in service and largely accounts for their superior performance.

1. Immunity from heat and chemical reactions.
2. Freedom from fuel, oil or moisture absorption which causes "shorts."
3. Inherently high heat conductivity with consequent wider range between pre-ignition and fouling.
4. Absolute uniformity of material.
5. Homogeneous structure eliminates air spaces which cause current leakage.
6. Easily cleaned and serviced—no specialized equipment or factory returns necessary.
7. Scientifically controlled manufacture.

KEEP 'EM FLYING BUY WAR BONDS AND STAMPS

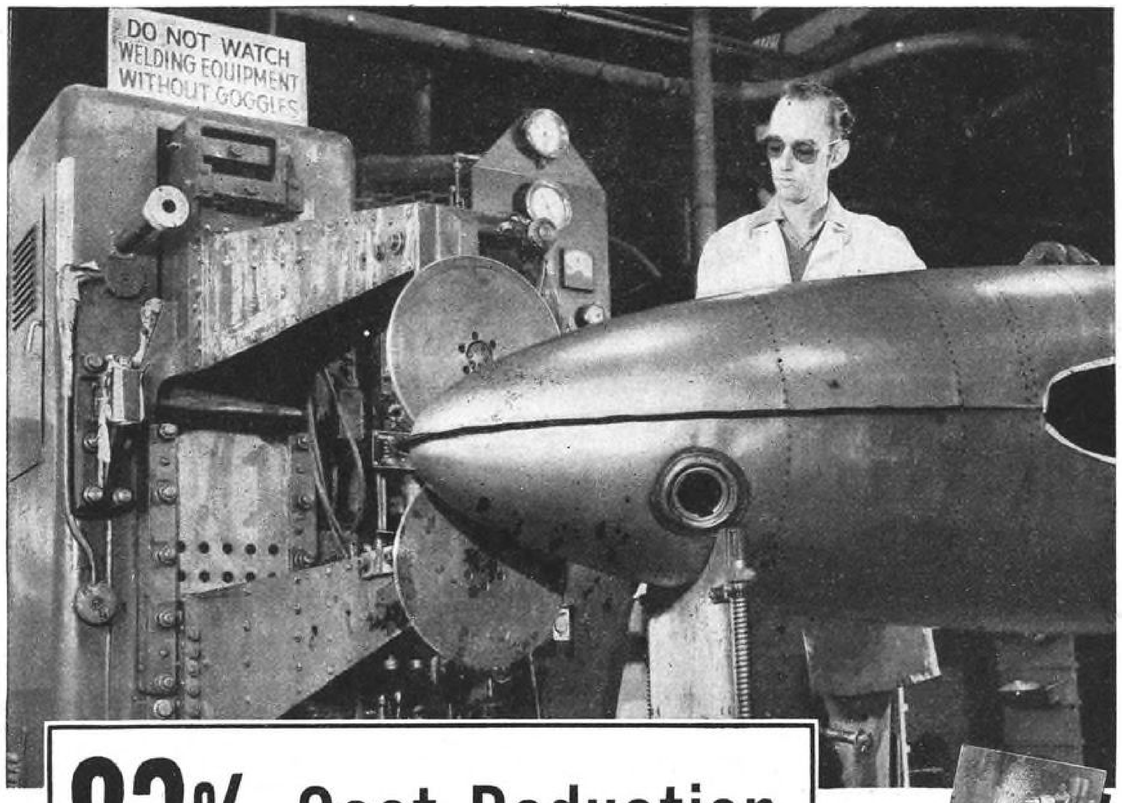

83% Cost Reduction *with* ELECTRONIC SEAM WELDING

How Lockheed Saves Man-hours and Material in Building This Fuel Tank

Here is the story as told by R. A. Von Hake, vice president in charge of manufacturing at Lockheed Aircraft:

"The use of resistance welding in aircraft is increasing because of improved controls, welding machines, cleaning processes, and process control. This 150-gallon droppable fuel tank was formerly made of aluminum alloy materials. The bulkheads were spot-welded to the skin, but the two halves were torch-welded.

"Minor redesign, and changing the material to 1010 steel, made possible the change from torch welding to resistance welding, as well as the use of time-saving welding fixtures and other special equipment. As a result, the cost of the tank has been reduced to approximately *one-sixth* the former amount."

The seam welder shown in the photograph is equipped with General Electric *electronic* control. We have a complete line, and G-E electronic-control specialists will help you select and apply the right controls. Contact any G-E office. *General Electric, Schenectady, N. Y.*

ELECTRONIC CONTROL

BUY WAR BONDS



FREE

G.E.'s new 44-page manual, "Fundamentals of Electronic Control for Resistance Welding". Gives basic information on electronic control for spot, seam, and special forms of resistance welding. Written by leading G-E electronic-control engineers. Send the coupon for your copy.

General Electric, Sec. F645-24
Schenectady, N. Y.

Please rush me your new 44-page manual, "Fundamentals of Electronic Control for Resistance Welding," No. GET-1170.

Name.....

Company.....

Address.....

645-24-8960

GENERAL ELECTRIC



★ Twisting a piece of wire sounds like a simple matter, but actually, in the making of better springs, it is quite a significant operation. By evaluating the results of a twist test, the Muehlhausen spring technician is able to select stock that will withstand the torsional strains to which springs are subjected in use.

In this test, a specimen of wire, held between two chucks of a specially designed laboratory machine, is twisted clockwise and counter-clockwise a predetermined number of times. Weakness is revealed by premature breakage or the opening of hidden seams. Only wire that can withstand the punishment of the twist test is approved for production.


Scores of such tests are conducted daily at Muehlhausen to make sure that every spring leaving this factory will perform with maximum efficiency and long life.

MUEHLHAUSEN SPRING CORPORATION
Division of Standard Steel Spring Company
740 Michigan Avenue, Logansport, Indiana

TWO NEW FOLDERS — FREE

Die Spring Bulletin illustrates, describes 206 sizes and types of die springs. • Armament Bulletin shows importance of springs for many types of war equipment.

MUEHLHAUSEN
MS SPRINGS
EVERY TYPE AND SIZE

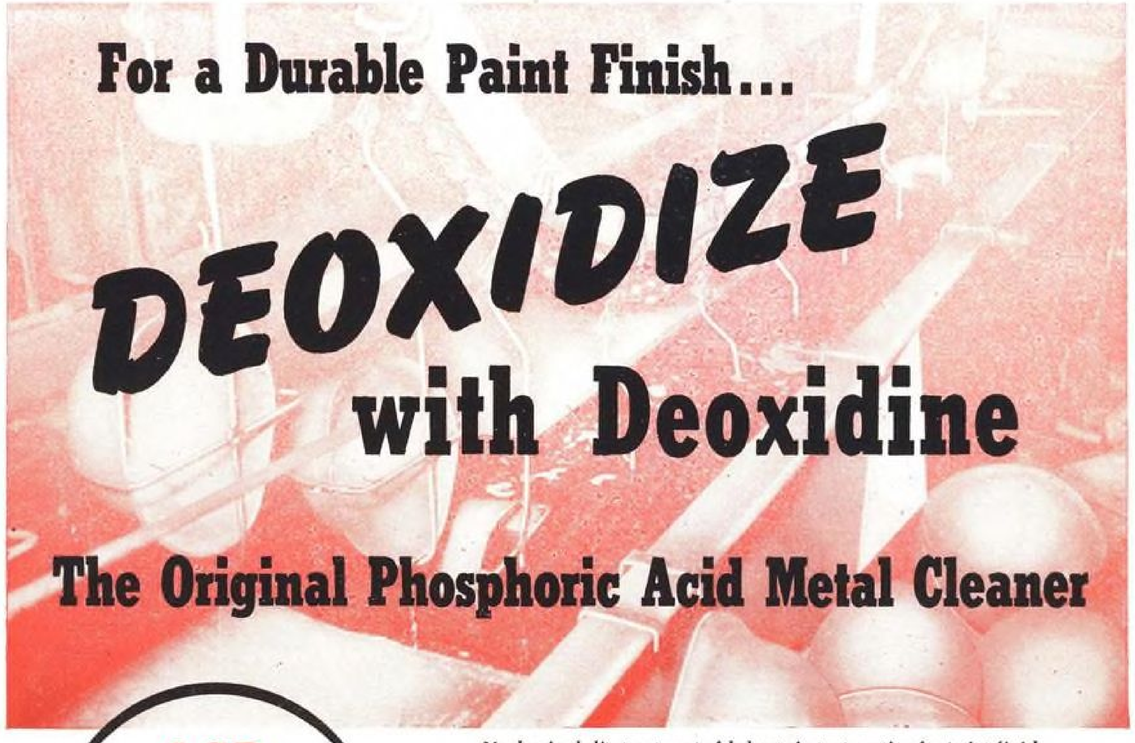

Mechanized dip treatment of helmets in preparation for paint finish

ACP Inhibitors and Metal Working Chemicals Speed Production of

GUNS
Mounts and Parts

AIRCRAFT and AUTOMOTIVE
Body Surfaces
Engines
Exhausts
Other Parts

MARINE
Structures and Parts

STEEL SHELLS and PROJECTILES
All Sizes

BOMBS
All Sizes and Types and Many Other Ordnance Parts

Deoxidine, a phosphoric acid type metal cleaner, removes rust and rust producers, light oil, oxides and annealing scale, from pits as well as the surface of metal, *creating* a *chemically clean, slightly etched* surface—the ideal anchorage for enduring paint or lacquer finish. Deoxidine meets Army and Navy specifications for cleaning metal prior to painting.

There are various grades of Deoxidine adapted to the several methods of application and to cleaning surfaces with varying amounts of rust and oil.

The Deoxidine Cleaning process has been standard for more than a quarter of a century and is adapted to the cleaning of steel, aluminum, aluminum alloys, in fact all metals (except zinc and cadmium).

The advice of our technicians is always available to adapt Deoxidine or other ACP products to your individual production problems.

Send for Technical Service Data Sheet.

AMERICAN CHEMICAL PAINT CO.
AMBLER ACP PENNA.

Note: West Coast Plants may address inquiries and orders for prompt delivery to: Leon Finch, Ltd., 728 East 59th St., Los Angeles, Calif.

American Chemical Paint Company, Ambler, Pa.
Please send me general Technical Service Data Sheets on
☐ Deoxidine

Name _____
Title _____
Company _____
Address _____
J-11



A·S·P

PRESENTS

A NEW SELF-SEALING COUPLING

FOR HYDRAULIC AIRCRAFT UNITS

A disconnecting, self-sealing coupling that really works. One prominent aircraft manufacturer writes that he has "found that this coupling is of much sturdier construction and more fool-proof design than present equipment. The American Screw Products coupling has consistently withstood 2500 p.s.i. with only finger-tightening. A sample coupling purposely crush-tightened with a long-handled wrench did not leak upon disconnection, or re-assembly. The hydraulics section of Engineering has granted unqualified approval of this coupling."

These features are important: Heavier construction of the high-strength aluminum body prevents distortion under very severe handling conditions; jamming of spring-loaded shut-off valve is prevented. Light weight cast phenolic poppets are positive-sealing in action. Springs are made of finest heat-treated steel. Synthetic gasket provides leak-proof connection when coupled for service. Available with AC or AN threads. Write for full details and prices.

AMERICAN SCREW PRODUCTS

7000 AVALON BOULEVARD • LOS ANGELES • CALIFORNIA



G-M

● The G-M Type 29 Relay is designed mechanically and magnetically to give unusual efficiency and dependability in operation. Its small size and light weight combined with rugged construction, characteristic of all G-M relays, make it ideal for a multitude of communications uses. The Type 29 is positive in action and requires an exceptionally low power input.

Numerous circuit combinations are available to meet practically any requirements. The high efficiency of the magnetic circuit insures high contact pressure. Phosphor bronze armature bearings, turning in accurately reamed holes in a brass bracket, insure free operation and long life. The contact springs and anti-vibration springs are of nickel silver. Mycalex insulators are available if specified. All steel parts are heavily cadmium plated and the coil is carefully impregnated so that the entire unit will withstand 200 hour 20% salt spray tests. The illustration above is actual size.

A free standardized sample of the Type 29 relay shown above, specification No. 12899* is available for examination and test to manufacturers who are prospective relay users. Orders for free samples must be accompanied by a priority of AA-4 or better.

*No. 12899 samples have 12 volt D-C coils, two double throw contacts and one single throw normally closed contact.




VISITRON PHOTOTUBES

are available in numerous sizes. Made by G-M, pioneer in development and manufacture of quality phototubes.

G-M LABORATORIES INC.

4319 NORTH KNOX AVENUE, CHICAGO 41, ILLINOIS

Buy WAR BONDS & STAMPS



Metallurgical Help for "The Little Man Who Isn't There"



The gyro-pilot is aptly nicknamed the "Little Man Who Isn't There." The device provides marvelous relief for pilots on distance flights, keeping the plane on its course with uncanny accuracy, despite wind and weather.

Developing the newest and most efficient gyro-pilot posed some pretty problems for the maker, including a design that called for unusual rotor rings. They required a metal with the greatest weight that could be contained in the smallest possible area.

Having worked with Mallory on other applications, the manufacturer asked Mallory to find the metal—and without delay.

A Mallory material — Mallory 1000 — was suggested. It is a material of high specific density and provides maximum mass weight in minimum space. It filled the bill exactly.

Here again was proof that metallurgical progress grows from meeting the service needs of many industries. Mallory 1000 was developed originally to shield the gamma radiation in radium beam therapy. Now its applications extend not only to gyro-pilots but to fly wheels and counterweights in aircraft where space is at a premium.

Where product plans call for experience and "know-how" with contact designs and materials, Mallory engineers and metallurgists may give real help. Bring your problems to them.

While the design is still in blueprint form



CONSULT MALLORY
for Contacts and Contact Assemblies

P. R. MALLORY & CO., Inc., INDIANAPOLIS, INDIANA
Cable Address—PELMALLO





Yank pilots nicknamed it "Invader"

During the fierce battles for Sicily and Italy, a brilliantly engineered new plane speeded our victory.

Officially known as the A-36, the new North American fighter-bomber was adapted from the famous P-51 Mustang. An American correspondent, reporting on this sensational new ship, cabled:

"The scream of this plane when it dives would shake any man. It makes a Stuka sound like an alley cat.

"When it levels off at the bottom, and lays those bombs right on the target, it zooms away as a heavily-gunned fighter, looking for Axis troops to strafe, for enemy planes or tanks or trains to destroy. It's a hot ship... plenty fast and plenty rugged. No wonder our jubilant pilots nicknamed it 'Invader.'"

But perhaps more important than its destructive power is the way the Mustang saves lives... the lives of *our* soldiers.

Blast the enemy's planes out of the air... disrupt his communications ...devastate his supply depots and transportation... destroy his offensive power... and you make the task of our ground forces infinitely easier, safer. With superior air power, it's as simple as that.

Through constantly improved designs, and field service on every fighting front, the men and women of North American Aviation are enabled to set the pace in an industry which safeguards America's future. The more and better planes they build, the sooner Axis resistance will be smashed . . . and the more American lives will be spared.

North American Aviation, Inc., designers and builders of the B-25 Mitchell bomber, AT-6 Texan trainer and P-51 Mustang fighter (A-36 fighter-bomber). Member Aircraft War Production Council, Inc.

North American Aviation *Sets the Pace!*



Venturi Tube, injection molded of LUMARITH E. C. (ethyl cellulose base). The E. C. family of Lumarith plastics is favored for applications of this sort because they maintain high impact strength and dimensional stability through extremes of humidity and temperature. The "CI" color is an integral part of the plastic. Surface finish is permanent. Lumarith plastics can be furnished in any color.*

WHERE LIGHTNESS CARRIES WEIGHT

Lumarith plastics of high impact strength "lighten the load" for aircraft designers. Today, when every possible ounce is cut from dead plane-weight in order to raise altitude ceilings and extend flying range, aviation engineers are getting important help from lightweight Lumarith. Special formulations meet and, in many cases, far exceed aeronautic specifications.

The Celanese Celluloid Corporation, makers of the full range of Lumarith plastics, can help you in adapting for plastics. You are invited to draw upon our documented experience and laboratory data for both your short and long range planning. Celanese Celluloid Corporation, *The First Name in Plastics*, 180 Madison Ave., New York City 16, a division of Celanese Corporation of America Sole Producer of Lumarith* and Celluloid* plastics. . . . *Representatives:* Cleveland, Dayton, Philadelphia, Chicago, St. Louis, Detroit, Los Angeles, Washington, D. C., Leominster, Montreal, Toronto, Ottawa.

*Reg. U. S. Pat. Off.

LUMARITH* E. C.

(ETHYL CELLULOSE BASE)

A Celanese Plastic



Copr. 1943 Airchox Company

World's Leading Manufacturers of Aeronautical Safety Equipment

AIRCHOX COMPANY, DIVISION OF JOYCE AVIATION INC., GENERAL OFFICES, 8 S. MICHIGAN AVE., CHICAGO

BUY WAR BONDS



Grumman Avenger



PESCO motor driven Hydraulic Pump for propeller feathering.

ARMY E NAVY

Knockout! Down before the torpedo bomber go the mightiest heavyweights of the enemy fleet. Through skies stark mad with defensive fire these planes close in to deliver their telling blow. A crucial test of both pilot and plane. Each torpedo striking home salutes the skill and daring of our flying sons, and craftsmanship of the millions here at home whose precision workmanship rules the sky. Pesco Products Co., 11610 Euclid Avenue, Cleveland 6, Ohio, (Division Borg-Warner).

In Aircraft Hydraulics, Fuel Pumps, Air Pumps, Related Accessories...



PERFORMANCE POINTS TO *Pesco* **FIRST**

New duGas Development Increases Fire-Fighting Effectiveness

DuGas Dry Chemical, well known for its fast action in extinguishing difficult fires, now takes on added importance. Research has resulted in an increase in its extinguishing effectiveness when applied from duGas pressure-type dry chemical extinguishers. Since fast action is an essential factor in successful fire fighting, this improved dry chemical is a highly important contribution to fire protection.



NEW PLUS-FIFTY duGas DRY CHEMICAL

Proven by Hundreds of Practical Fire Tests

New PLUS-FIFTY duGas hangs in a cloud over the fire area, providing an increased smothering action and reducing flashbacks. Long range effectiveness of the dry chemical stream enables even an inexperienced operator to knock down fire from a greater distance. Like the former duGas, PLUS-FIFTY duGas Dry Chemical will not cake, harden, evaporate, deteriorate or freeze. It generates no toxic fumes and is not an electrical conductor.

NO PRIORITY NEEDED

Since no critical materials are used to produce the New PLUS-FIFTY duGas Dry Chemical, no priority is required...and there is no advance in price.

APPROVED by the Underwriters' Laboratories and the Factory Mutual Laboratories.

... WRITE FOR COMPLETE BULLETIN ON NEW PLUS-FIFTY DUGAS and Priority Information on Extinguishing Equipment.

Available in Models 15 and 30 Hand Extinguishers, Models 150 and 350 Wheeled Extinguishers.



Model 30
Hand Extinguisher

WRITE FOR chart showing characteristics of *all* types of approved hand fire extinguishers.

DUGAS ENGINEERING CORPORATION
OWNED AND OPERATED BY
ANSUL CHEMICAL COMPANY, MARINETTE, WISCONSIN



NOTHING TO IT, EH?

Modern war planes can climb a mile a minute. In very few minutes a fast climber can be up in the sub-stratosphere. But . . .

Temperature takes a nose dive as the plane soars higher. At 20,000 feet the temperature is well below zero. Apparently at about 35,000 it becomes fixed . . . *at 70 degrees below zero* in the temperate zone. Over the equator, stratosphere temperature drops as low as 100 degrees below zero.

Both pilot and plane encounter troubles in the bitter-cold, rarefied air of the sub-stratosphere. Moisture freezes, oil congeals, engines gasp and die unless aided by turbo-superchargers.

Nevertheless, planes and pilots are learning to fight at higher and higher levels—thanks to research conducted on the ground in test chambers which reproduce the conditions of the stratosphere. Accurately controlled *air conditioning and refrigeration*...plus controlled pressure...make these tests possible.

This is one of the many interesting and important ways in which air conditioning is contributing to our war effort. To do the tasks of war time, General Electric has developed dependable air conditioning and industrial refrigeration equipment...equipment that is more flexible, more compact, more efficient.

After the war, lessons learned in wartime production will be applied to making better peacetime air conditioning. This will be made available to all from General Electric.

☆ BUY WAR BONDS ☆

General Electric Company, Air Conditioning and Commercial Refrigeration Divisions, Section 4311, Bloomfield, N. J.

Air Conditioning by

GENERAL ELECTRIC

For the General Electric Radio Programs: The "HOUR OF CHARM," Sunday 10 P. M., EWT, NBC..."THE WORLD TODAY" News, Every Weekday 6:45 P. M., EWT, CBS



REPUBLIC P-47 THUNDERBOLTS *are equipped with* **WITTEK AVIATION HOSE CLAMPS**

On the offensive—with new weapons for allied victory—P-47 Thunderbolts! These fast firing heavily armored high altitude fighters are equipped with Wittek Aviation Hose Clamps. Today, as in the past, Wittek Aviation Hose Clamps, known as the standard of the industry, are being used by the nation's leading military aircraft and engine builders. Wittek Manufacturing Co., 4305-15 West 24th Place, Chicago 23, Illinois.

ARMY E NAVY

Back The Attack—Buy War Bonds

WITTEK *Aviation* HOSE CLAMPS



Jewels of Precision


INTERSTATE is not only one of America's largest producers of bomb shackles, machine gun and cannon chargers, hydraulic actuators, etc., but one of America's most precise producers. Here, on a daily 24-hour schedule, master craftsmen turn out vast quantities of aircraft units as finely wrought as precious jewels. And, to make precision more precise, inspectors with minute gauges and costly testing apparatus check every operation, every part, every unit. Perhaps this explains why Interstate's exacting standard of workmanship is acknowledged the finest in the West!

Interstate

AIRCRAFT AND ENGINEERING CORPORATION

EL SEGUNDO, CALIFORNIA

G.E. Announces

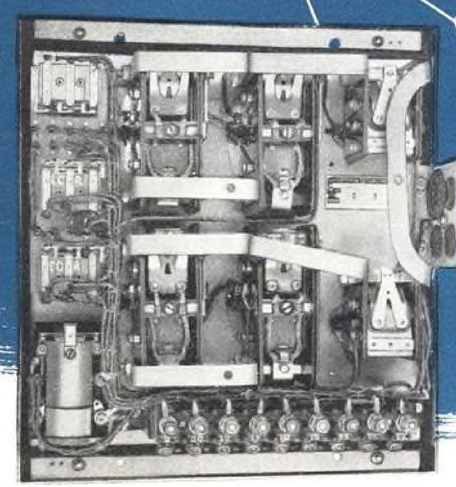

PACKAGED CONTROL SYSTEMS FOR AIRCRAFT

Factory-designed and -assembled for light weight and easy installation

You tell us the type motor you are using, the purpose for which it is to be used—we'll design the circuit, select the proper devices, assemble, wire, and test them as a unit, and deliver a complete control system to you, ready for installation. All the individual devices, such as relays, contactors, and switches, required for control of an electric motor are co-ordinated and compactly assembled in lightweight enclosures.

You get these advantages:

1. From our wide variety of aircraft control devices we can select those best suited to the job—often making one device do the work of two with the greatest saving of weight and space.

2. Wiring, test, and assembly are completed at the G-E factory. Responsibility for the complete control system rests with one manufacturer.

3. Circuits are designed by G-E engineers who have had years of experience in the design as well as application of control equipment.

Next time you need aircraft control equipment, before you order individual devices, contact our nearest office and ask for more details on G-E packaged control. *General Electric Company, Schenectady, N.Y.*

The best investment in the world is in this country's future—BUY WAR BONDS

AIRCRAFT CONTROL

Reversing control for:

- Nose wheels
- Landing wheels
- Landing and diving flaps
- Bomb doors
- Bomb hoists
- Turret retractors
- Wing-folding gear
- Trim tabs

Nonreversing control for:

- Hydraulic system pumps
- Heat or air circuit fans
- Cabin heaters
- Engine heaters
- Engine starters
- Gasoline pumps

GENERAL ELECTRIC



READILY AVAILABLE

Kapok FELT

Made to requirements of Army-Navy Aeronautical specification **AN-S-32**

1. Constant acoustical and thermal properties
2. High acoustical efficiency . . . 56
3. "K" factor . . . 0.21
4. No corrosive action
5. Ph control . . . 6.8 to 7.2
6. No propagation of flame
7. No surface flash
8. No disintegration from vibration or in handling
9. Bacterial, fungi and vermin resistant
10. Low surface density . . . 0.36 lb./sq. ft./1 in.
11. Moisture resistant
12. No collapse under severe temperature changes

Safety and comfort of flight crews, and the accurate operation of their instruments, are assured by cabin interlining of "K" FELT, the *safest* insulation to handle and to install. Seasoned representatives are available to give you the benefit of our successful experience. Samples and Data Sheet No. 3, "'K' FELT," will be gladly sent on request.

American Felt Company

TRADE MARK

General Offices: GLENVILLE, CONN.

New York; Boston; Chicago; Detroit; Philadelphia; Cleveland; St. Louis Los Angeles; Seattle; San Francisco; Dallas;

PRODUCERS OF FINEST QUALITY PARTS FOR OIL RETAINERS, WICKS, GREASE RETAINERS, DUST EXCLUDERS, GASKETS, PACKING FELTS, VIBRATION ISOLATING FELTS AND INSULATING FELTS

AN

IMPROVED SYSTEM FOR CLEANING and TREATING ALUMINUM PISTONS IN VOLUME PRODUCTION



For Uniform Relief of All Internal Stresses

For the cleaning and relieving of stresses in pistons (to eliminate distortion in service) the Mahon system, pictured above, is proving particularly effective.

To remove adhering oil and metallic particles from initial machining operations, racks of pistons first pass through a hot cleaning and rinse unit and then up through a specially designed, gas-fired oven, regulated to a constantly uniform predetermined temperature. Uniformity of oven heat is achieved by continuous re-circulation of an exceedingly large volume of the heated air which completely surrounds and heats each piston *all the way through*—maintaining it at the required temperature for proper processing throughout its oven travel. The system is unusually compact—and entirely automatic—ONE man handling all loading and unloading operations.


Primarily developed for a large manufacturer of aluminum aircraft engine pistons, this practical Mahon system is readily adaptable to any aluminum alloy part or fitting.

Mahon engineers will give you any further particulars you desire and will fully cooperate in working out a similar system suitable to your plant and product.

THE R. C. MAHON COMPANY

DETROIT — CHICAGO

Fabricators of Machine Bases and Frames and Many Other Welded Steel Plate Products

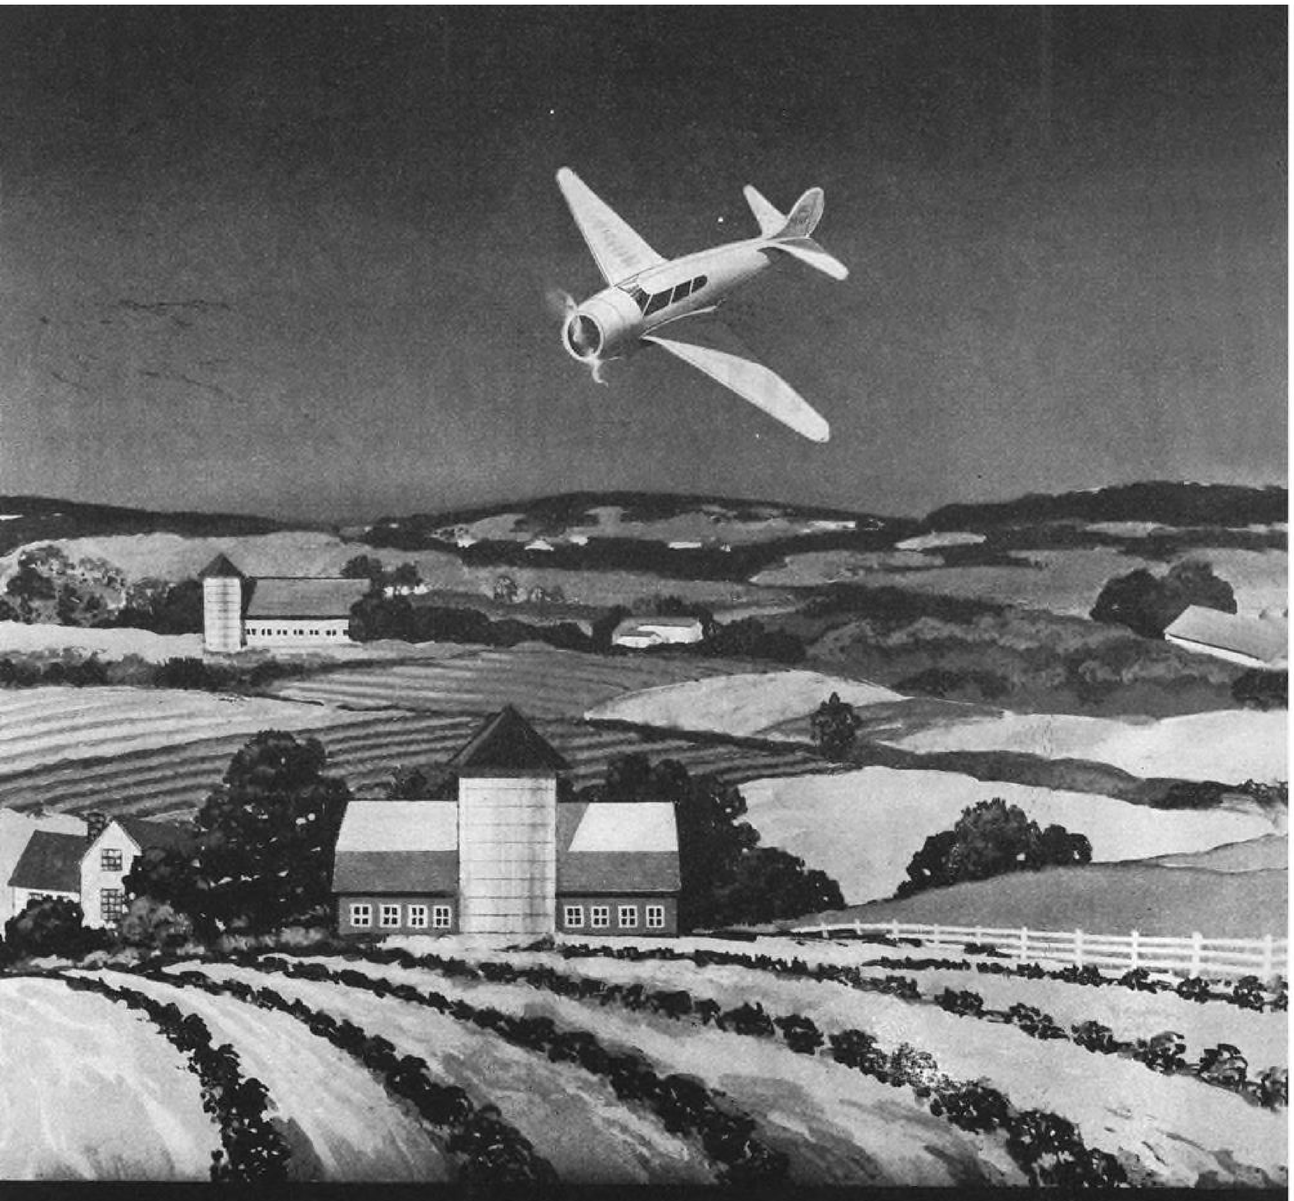

HOME *Straight as an Arrow...*

With the unconditional surrender of our enemies,—which must be won by our blood, sweat and toil—, will come peace and the post-war period of reconstruction and development.


Aviation, now the No. 1 industry of America, will continue to lead the way. From the centers of our great cities to the vast expanses of our rural sections, Airplanes will play a leading part in our lives. Distances between home and place of business will be of much less importance, as the speed and efficiency of Aircraft will make commuting practical and economical. You can go home straight as an arrow, from wherever you are.

Advanced engineering and foresight will continue Jacobs leadership in the production of dependable and economical Aircraft Engines — ***practical engines*** for the private owner, the business concern and the "feeder" Airline.

JACOBS AIRCRAFT *Engines*

POTTSTOWN · PENNSYLVANIA U·S·A·

"...experienced, skilled, resourceful"

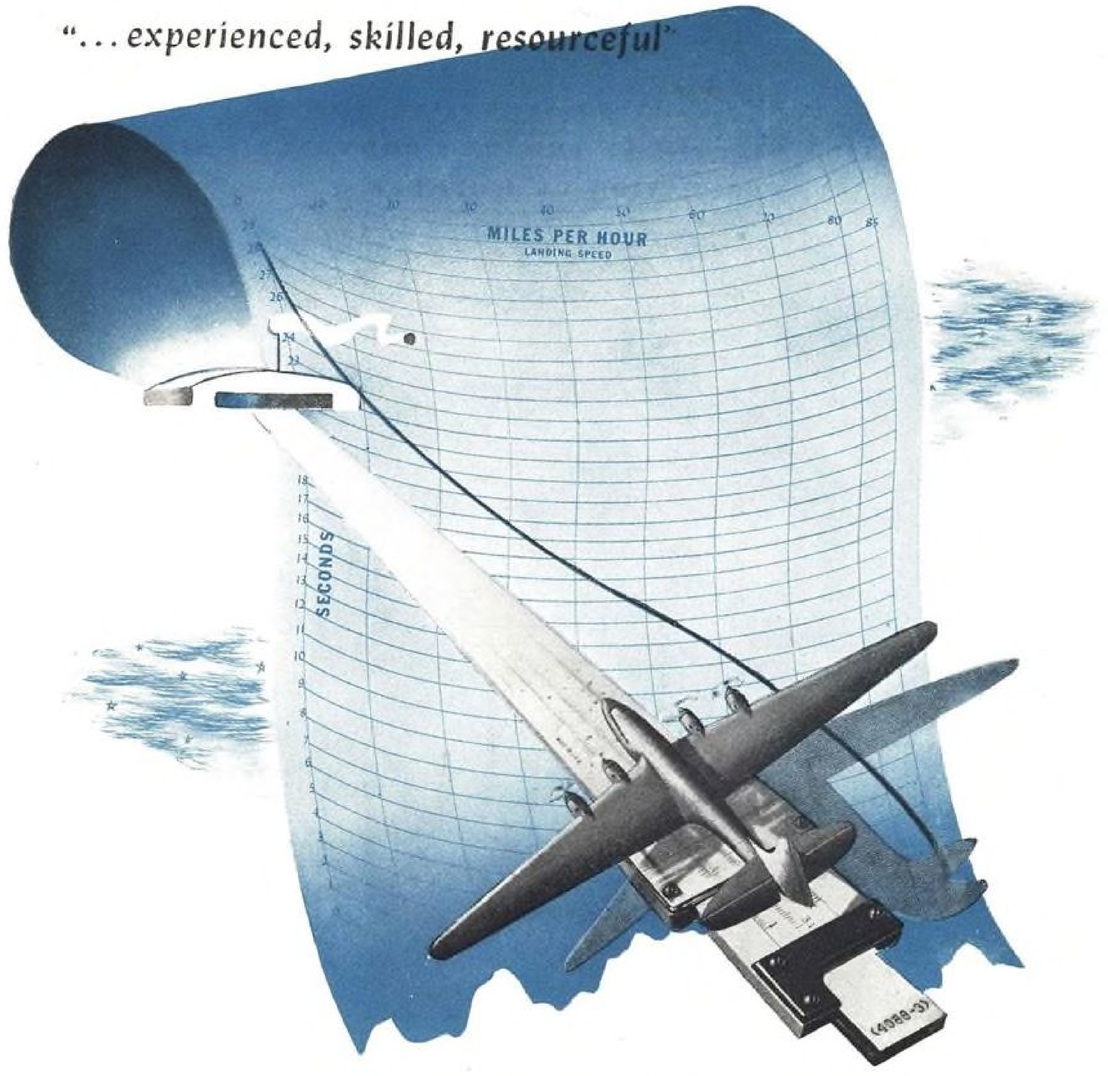

Each customer's specifications for Raybestos Aircraft Brake Lining are usually different—and frequently unprecedented. Success in mastering the manifold problems which thus arise has won leadership for Raybestos in the aircraft field—a natural outcome of Raybestos leadership in the automotive and industrial fields. Raybestos keeps progressively ahead—experienced, skilled, resourceful—and with an enlarged war staff of technologists which is at your service for consultation.

THE RAYBESTOS DIVISION of *Raybestos-Manhattan, Inc.*, BRIDGEPORT, CONN.

Raybestos *Aviation*

FRICTION MATERIALS

METALLIC AND NON-METALLIC TYPES

"Planes start safer, fly higher and make quicker stops with Raybestos"


SOMETHING REALLY NEW!

Douglas C-47 "Skytrain" on Edo Model 78 Amphibious Float Gear

READY TO SERVE IN

TRANSPORTATION OF COMBAT TROOPS · ORDNANCE · SUPPLIES

EVACUATION OF WOUNDED

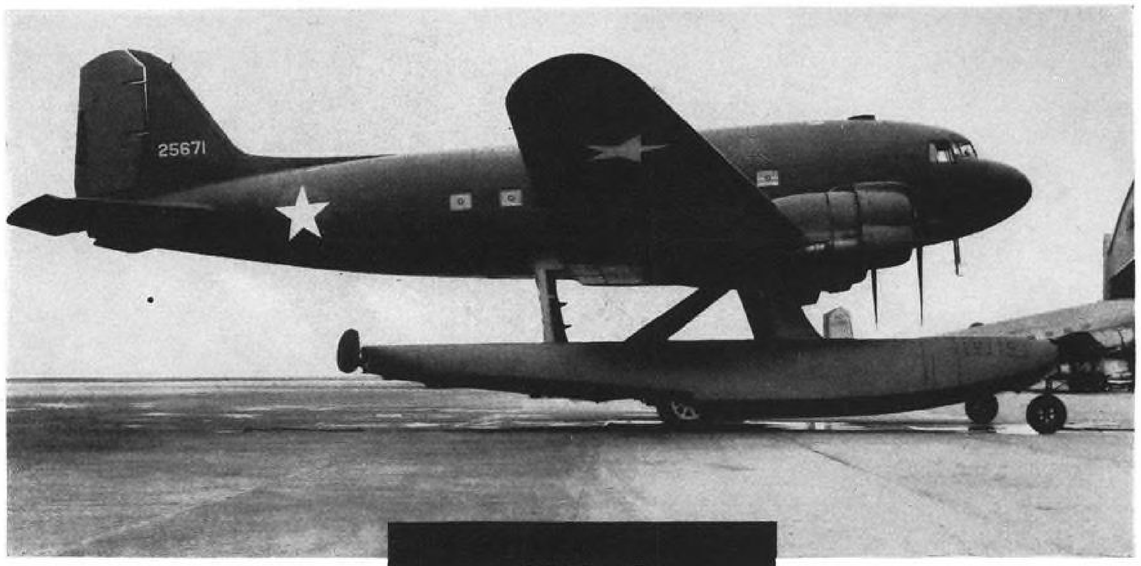


ALL-ROUND SERVICE **EDO** ***AMPHIBIOUS FLOATS*** with retractable wheels **ON LAND AND SEA**



EDO FLOAT GEAR

SERVES THE UNITED NATIONS

EDO AIRCRAFT CORPORATION, 402 SECOND STREET, COLLEGE POINT, L. I., N. Y.

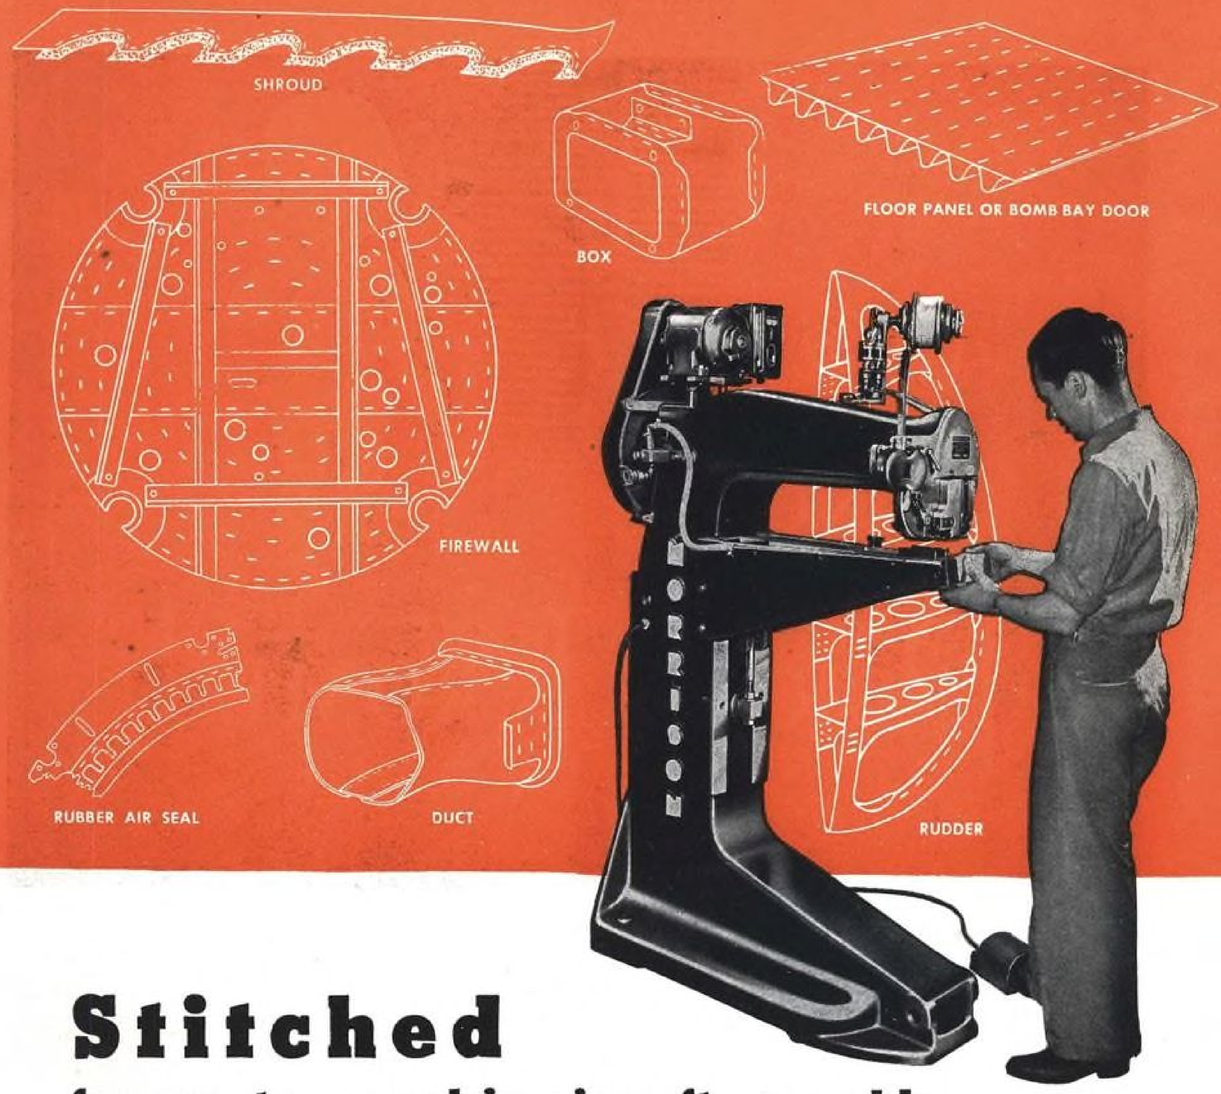

Stitched

for greater speed in aircraft assembly

Above are shown some typical examples of aircraft stitching done on the MORRISON AIRCRAFT METAL STITCHER. More and more parts are being converted to stitching as manufacturers find the remarkable time-saving involved. *Man hours have been cut 86% in one plant alone.*

Morrison Stitchers form, clinch and drive stitches in a single operation . . . make clean exit holes with no tearing of metal . . . handle combinations of materials. They are simple to operate, only one operator is required and no special skill is demanded. Maintenance is reduced to a minimum . . . Morrison Stitchers are ruggedly built.

If you are riveting or spot welding Aluminum, Stainless Steel, Plastics, Cork, Rubber, Asbestos, Wood or Canvas, it will pay you to investigate Morrison Aircraft Metal Stitchers. Write today for Bulletin No. 10-F.

BUY WAR BONDS



Actual photograph, magnified several times, of cross section of stitch driven through two sheets of 24ST .040 Aluminum.

MORRISON

PRODUCTS OF THE SEYBOLD DIVISION
HARRIS-SEYBOLD-POTTER COMPANY
DAYTON F7, OHIO

STITCHERS

A "War Baby"?



NOT

PORUS ★ KROME ! *

FACT 1—Hitler was just a minority party leader in Germany when Hendrik van der Horst first started the developments that led him to the discovery of PORUS-KROME.

FACT 2—Before Hitler invaded Poland, Van der Horst plants in Holland and England were in production applying porous chromium to cylinders and liners for internal combustion engines.

FACT 3—Porous chromium was introduced to the United States by Van der Horst in June, 1939, when he processed the first cylinders for the Navy.

FACT 4—The Van der Horst process is controlled by patents which completely protect the applying of PORUS-KROME. The most recent was granted March 23, 1943 (Patent No. 2314604). The process is entirely independent of all U. S. patents excepting those owned by the Van der Horst Corporation.

FACT 5—Only in the sense that its American development has been accelerated by vital war needs is PORUS-KROME a "war baby". Van der Horst plants and licensees are applying PORUS-KROME to cylinders, cylinder liners and piston rings for many Army and Navy engines.

FACT 6—PORUS-KROME is here to stay! Backed by Van der Horst engineering and research, it is now available to engine builders for application in their own plants, under licensee arrangements, or in Van der Horst's plants. Send for information.

*PORUS-KROME is hard chromium having controlled porosity and smoothness. It is applied with precision to internal combustion engine cylinder bores and other bearing surfaces to reduce wear, corrosion and scuffing and to lengthen engine life.

VAN DER HORST TRADE MARK

PORUS ★ KROME

Multiplies Engine Life

VAN DER HORST CORPORATION OF AMERICA CLEVELAND, O. OLEAN, N. Y.

CONTACT PRESSURE LIFTS 15 TIMES THE RELAYS' WEIGHT!

DUNCO'S LITTLE GIANT OF THE RELAY FIELD

Ordinary relays weighing, say, one pound, may give a contact pressure of 3 or 4 ounces.

By comparison, the Struthers-Dunn Series 61 D.C. Relays give 7 *pounds contact pressure in a unit weighing only 8 ounces!* Moreover, these famous Dunco "Nutcrackers" are especially designed to withstand shocks and vibration, and to operate faithfully without an enclosure in dirty or dusty places.

Although designed for D. C. use, their contacts will also handle A.C. They are supplied in various single and double pole types and are specifically recommended for any low-voltage d-c service where exceptionally strong contact pressure is desirable to secure maximum resistance to shock.

RELAY GUIDE SENT ON REQUEST

You'll find these Series 61 Relays described on Page 29-F of the Dunco Catalog and Relay Data Book. Copy gladly sent on request to interested users.



STRUTHERS-DUNN, Inc.

1321 ARCH STREET, PHILADELPHIA, PA.

DISTRICT ENGINEERING OFFICES: ATLANTA • BALTIMORE • BOSTON • BUFFALO • CHICAGO • CINCINNATI • CLEVELAND • DALLAS • DENVER • DETROIT • HARTFORD INDIANAPOLIS • LOS ANGELES • MINNEAPOLIS • MONTREAL • NEW YORK • PITTSBURGH • ST. LOUIS • SAN FRANCISCO • SEATTLE • SYRACUSE • TORONTO • WASHINGTON


How Hot? How High?

WITH "PERFORMANCE-TESTED"

YOU SKIP at least one big headache in aircraft heating when you turn to South Wind. Because exhaustive performance tests—made possible by Stewart-Warner's *complete* engineering facilities—show you in advance the capabilities of each South Wind model. You get no "laboratory marvels"—unknown and unproved—to gamble with at your own risk and on your own time.

Typical of South Wind's "pedigreed" heaters are the two shown here. Each is completely independent of the engine. Each one, as shown, is ram-air operated. For each, a fan is available, providing continuous operation—by fan-fed air on the ground and by ram-air aloft. Switch-over from fan to ram and back is controlled automatically by ram-air pressure.

New South Wind 906-A is a 17-pound, ram-air operated unit rated at 50,000 Btu/hr. Actual test data shown below.

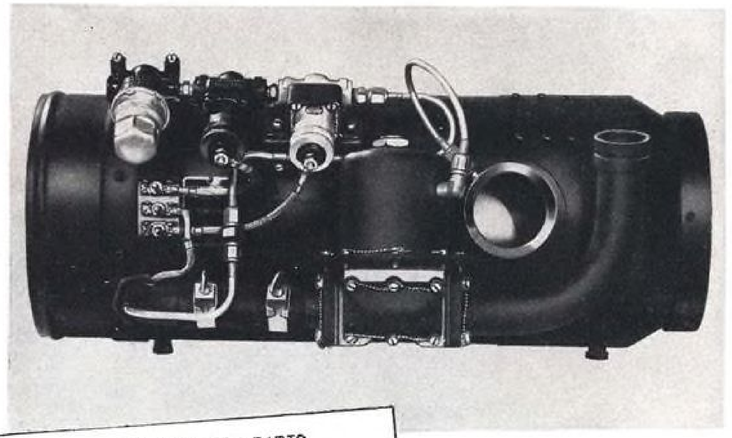

PERFORMANCE RUNS...CONSTANT FUEL-AIR RATIO

Type 906A Serial 101

PERFORMANCE RUNS...CONSTANT FUEL PRESSURE WITH VARIOUS COMBUSTION-AIR PRESSURES

Type 906A Serial 101

COLD-START TESTS

Type 906A Serial 101

COLD START TESTS AT ALTITUDE

Type 906-A Serial 101

Pressure Altitude, Ft.	Inlet Air Temp. °F	Combustion Air Pressure "H_2O ★	Fuel Rate #/Min.	Time to Start
20,000	-65	5.5	0.076	25 SEC.
25,000	-70	6.7	0.078	3 MIN 25 SEC.
25,000	-68	6.7	0.078	2 " 34 "
25,000	-54	7.2	0.082	1 " 55 "
25,000	-50	33.0	0.081	2 " 55 "

★ Air Control. Voltage at Heater-24

How Fast? YOU KNOW IN ADVANCE

SOUTH WIND HEATERS!



Model 905 weighs only 7½ pounds. Continuous operation—by blower on the ground and ram-air aloft—is attained by addition of fan. Switch-over is automatic. Actual test data is shown below.

PERFORMANCE RUNS AT SEA LEVEL

Type 905 Serial X566

PERFORMANCE RUNS AT HIGH ALTITUDE

Type 905 Serial X566

COLD-START TESTS AT ALTITUDE

COLD START TESTS

Type 905 Serial X566

Cold Room Temperature	Voltage at Heater	Inlet Pressure "H_2O	Time to Start
-64	24.0	2.9	4 MIN 10 SEC.
-62	24.0	6.0	2 MIN 10 SEC.
-58	23.0	2.8	NO START ★
-40	24.0	2.8	30 SEC.
-40.	24.0	2.8	3 MIN 10 SEC.

★ NOTE LOW VOLTAGE

RELATION OF HEAT OUTPUT TO RAM-AIR PRESSURE

40,000 / 30,000 / 20,000 / 10,000 Btu/hr. Heat Output

Automatic change from blower to Ram-Air

10 20 30 Inlet Pressure - "H_2O

Note how automatic maintenance of fuel-air ratio results in increased output as ram-air pressure increases.

Another Product of STEWART WARNER

South Wind Heaters

REG U S PAT OFF.

HEATER DIVISION, STEWART-WARNER CORPORATION, CHICAGO, ILLINOIS

West Coast Office: Stewart-Warner Aircraft Heater Engineering and Service, 1273 Westwood Blvd., West Los Angeles, California



LOOK OUT BELOW!

–Here comes a wallop "right on the button"


DESIGNED to do the seemingly impossible—to proceed to a distant target *alone*, and to hit one ship, one dock or one particular part of a war plant from extreme heights—that's the Flying Fortress, the plane that has made precision bombing a daytime nightmare for the Axis.

Superior control is the very basis of precision bombing. Without it, the Fortress' effectiveness for spot bombing would be seriously diminished. The fact that American Tiger Brand Control Cables are used in this famous plane speaks for itself as recognition of superiority.

In America's finest combat and commercial aircraft, Tiger Brand Control Cables translate the hair-trigger decisions of the pilot into direct, instantaneous action. Their high strength and high fatigue resistance, minimum stretch and superior flexibility insure the sensitive response indispensable for precision flying and combat tactics. The fact that they are of Excellay Preformed construction is further assurance of flawless performance.



Call on our aircraft cable engineers when changing specifications and new designs confront you with problems. They have an understanding of your needs that you will find helpful.

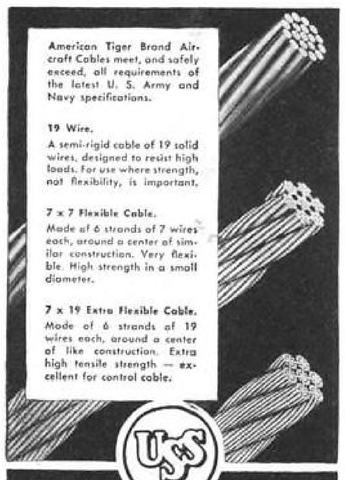

AMERICAN Tiger Brand CONTROL CABLES

AMERICAN STEEL & WIRE COMPANY
Cleveland, Chicago and New York
COLUMBIA STEEL COMPANY
San Francisco
United States Steel Export Company, New York

UNITED STATES STEEL



CAPTAIN HOELLE'S SOMERSAULT

Flipped on its back by a telephone pole a Lockheed Lightning flies home

Lightning P-38's were designed as interceptors—to climb to great heights, rapidly—to operate at peak efficiency above 15,000 ft. But action is where you find it in modern warfare, and this is the exciting, true experience of an American fighter pilot and his plane just twenty feet above the buliet-scarred earth of Tunisia.

1. CAPTAIN W. J. HOELLE and his Lightning squadron set out to break up Axis supply lines by ground-strafing trucks, tanks, troops and anything else that bore the German swastika. Up and down the Tunisian roadway they scattered men and equipment. Suddenly an enemy pillbox got its range—came too close for comfort. As Hoelle turned to blast the gun position, the tail of his plane hit a telephone pole. The plane was flipped onto its back just 20 feet above the ground.



2. COOLLY, INSTINCTIVELY, Hoelle kicked full top rudder and full left aileron. The Lightning bounced crazily along through space, gradually working itself into a right bank position.



3. TOO LOW TO JUMP, too low to maneuver, impossible to land, it looked like "curtains" for Hoelle. Then he thought of lowering the wing flaps usually used for controlled landings. This gave the Lightning just the lift that was needed to pick up altitude and start home.

4. FLYING SPEED had been greatly reduced, and Hoelle's Lightning would have been easy bait for German fighters if his squadron mates had not formed a protective canopy over him for the 360-mile trip home.

5. IT WAS A BRUISED and worn-out pilot and a battered Lockheed Lightning that landed at the advanced Tunisian airfield—but both had proved their worth. Sound training was responsible for Hoelle's intelligent actions in a tight spot, and sound construction enabled the Lightning to get him out of it.



This is another in a series of stories about Lockheed and Vega and their accomplishments. Watch the pages of this magazine for another true aviation adventure.

LOOK TO
Lockheed
FOR LEADERSHIP
Lockheed Aircraft Corporation, Vega Aircraft Corporation, Burbank, Calif.

★ ★ ★ ★ ★ ★ ★ ★ ★ ★ ★ ★ ★ ★

Modern Material-Handling Equipment



especially developed for the

AVIATION INDUSTRY

LYON-*Raymond*
***Hydraulic* HOIST**

The largest equipment ever built for installing and removing engines in planes at airfields . . . one example of specialized material-handling equipment LYON-Raymond has designed and built for the Aviation Industry.

Of interest to the Aviation Industry is the invaluable fund of experience accumulated by LYON-Raymond, in designing and manufacturing many different devices to expedite material handling by airplane manufacturers, motor plants, equipment makers, and military and commercial airfields—for application to manufacturing, servicing and operating tasks.

The facilities of LYON-Raymond are available for the design and production of material-handling units involving either the adaptation of our standard equipment, or the engineering development of new and strictly specialized units.

Write us regarding your requirements. Our recommendations will be submitted without obligation.

LYON-Raymond Standard Products: Hydraulic Lift Trucks . . . Hydraulic Pallet Trucks . . . Hydraulic Elevating Trucks . . . Hydraulic Elevating Tables . . . Hydraulic Die Handling Trucks . . . Hydraulic Sheet Handling Trucks . . . Hydraulic Stacking, Tiering, Hoisting Equipment . . . Hydraulic Pumps — hand or foot operated . . . Hydraulic Welding Positioners.

LYON-Raymond
CORPORATION

285 MADISON ST. • GREENE, N. Y.



SCHATZ PIONEERED
IN THE
BALL BEARING INDUSTRY

•

HAS ALWAYS SPECIALIZED
IN THE MANUFACTURE OF
PRECISION BALL BEARINGS

•

IS TO-DAY PRODUCING AN
EVER-INCREASING SUPPLY
OF
FINE CONTROL BEARINGS
FOR THE
AIR FORCES
OF THE
UNITED STATES

•

SCHATZ
Precision
AIRCRAFT
BALL BEARINGS

THE SCHATZ MANUFACTURING CO.
U. S. A.
REPRESENTATIVES LOCATED AT
Detroit: 2640 Book Tower • Chicago: 902 S. Wabash Ave.
Cleveland: 402 Swetland Bldg. • Los Angeles: 5410 Wilshire Blvd.

The Light that MUST NOT FAIL



Pull . . . Pull . . . Slide . . . Pull and pull again. So it goes, as yards of silken safety chute pass over a frosted glass window. Through it, a powerful light blazes while keen eyes search every stark detail of triple-stitched seams, alert to detect any dropped stitch, break or snarl. This is a light that must not fail . . . for here, truly, life hangs on a thread. ☆ ☆ ☆ Switlik workers are exceedingly proud of their contribution to the jumper's serene confidence during those moments of literal "suspense" between plane and earth. ☆ ☆ ☆ The skill these craftsmen have developed is a tribute to Switlik engineering methods in designing "the best parachute that can be made"... and setting new records, as well, for production and delivery of this Switlik Safe-T-Chute. ☆ ☆

SWITLIK SAFE-T-CHUTES

Air Power is winning the war . . . The more Bonds you buy . . . the more hours they fly!

SWITLIK PARACHUTE COMPANY
Trenton, New Jersey

Copyright 1943, Switlik Parachute Co.



If your present manufacturing operations or postwar plans involve product parts where light weight is essential, consult Westinghouse.

Skilled Micarta engineers will be glad to study your product and to analyze its applications. And they will give you the benefit of 35 years' experience with industrial plastics.

This experience is particularly extensive with respect to aircraft applications . . . for example,

MICARTA IS THE IDEAL MATERIAL for airplane fairleads, guides and pulleys. Its weight is only one-half that of aluminum.

ON FIGHTERS AND BOMBERS, literally millions of Micarta parts are in constant use. Micarta is also used for control and instrument panels, antenna masts, terminal blocks, spacers and bearings . . .

AND IN MANY OTHER INDUSTRIES... hundreds of thousands of Micarta products are in use where light weight and dependability are vital.

In the majority of these applications Micarta is used as a replacement for critical materials and is serving better.

We urge you to find out the facts about Micarta today. Wire or phone your nearest Westinghouse office or write to Westinghouse Electric & Manufacturing Company, Dept. 7-N, East Pittsburgh, Pa., and ask for a copy of the new Micarta Data Book—B-3184. J-06339

TYPICAL MICARTA TOUGH JOBS IN WAR APPLICATIONS


Aircraft structural parts	Protective helmet liners
Industrial gears	Aircraft control pulleys
Instrument panels	Bus supports
Steel mill bearings	Fuse mountings
Thrust washers	Insulating washers
Marine bearings	

Westinghouse
PLANTS IN 25 CITIES OFFICES EVERYWHERE

Micarta *The* INDUSTRIAL PLASTIC

The difference between LIFE AND DEATH

Air tactics Diagram shows how FLYING HORSEPOWER will aid our fighter pilots

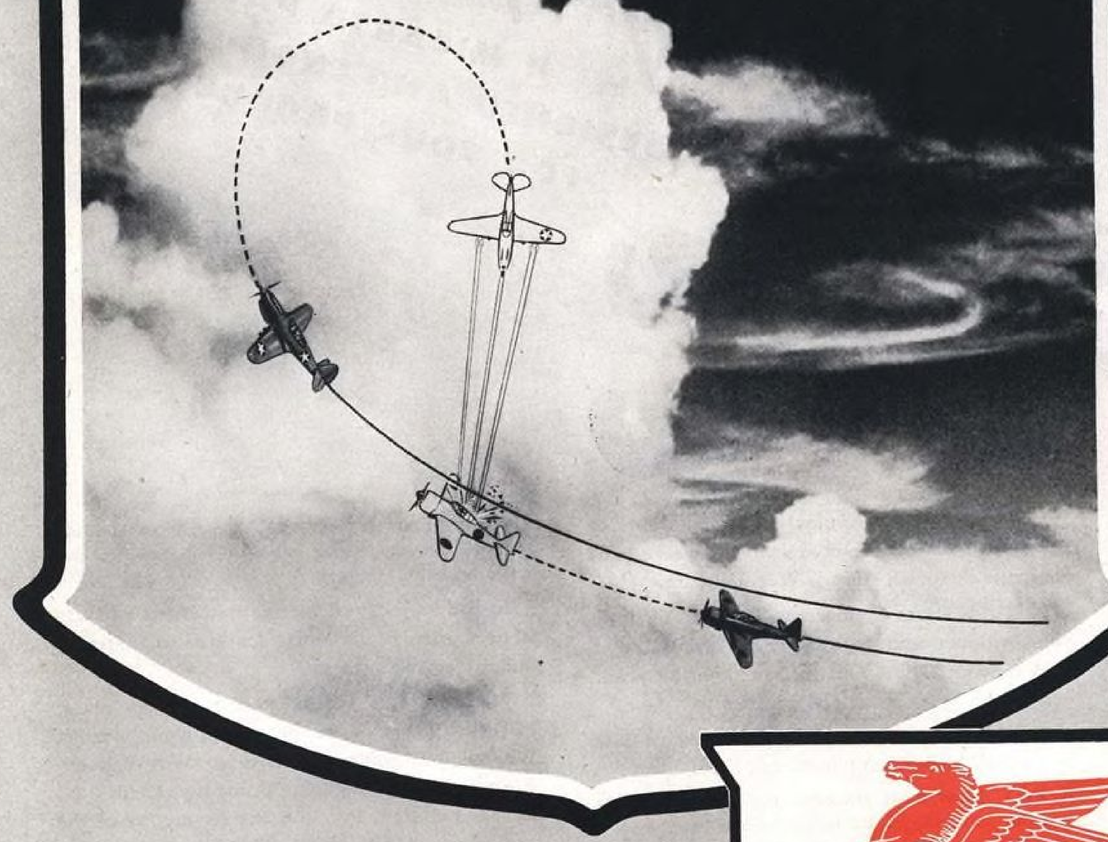

PICTURE AN AMERICAN BOY up there, three miles above the Pacific—fighting an opponent who moves 500 feet a second...

He's a long way from the U.S.A. and white-coated Socony-Vacuum scientists—yet, *those scientists have produced a fuel which will give him a great advantage in battle!*

Socony-Vacuum's new TCC Process and the sensational new Bead Catalyst are the revolutionary refining developments which will make this super power possible—which will help many an American boy zoom up at an angle his enemy can't follow and come back spitting sudden death.


This new super fuel will make today's 100 Octane gasolines seem old-fashioned. It not only means far greater speed and maneuverability for our fighters, but increased range and heavier "pay loads" for U.S. bombers.

Thus, a new power—*Flying Horsepower*—will help U.S. to maintain air supremacy.

SOCONY-VACUUM OIL CO., INC. and Affiliates: Magnolia Petroleum Co., General Petroleum Corp. of California.


AERO
Mobilgas
SOCONY-VACUUM

Coming—in Aero Mobilgas *Flying Horsepower!* New Super Power for U. S. Planes

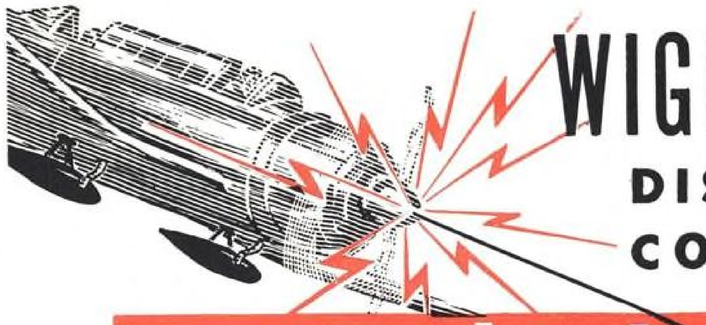

WIGGINS *Quick* DISCONNECT COUPLINGS

a war development you can use NOW!

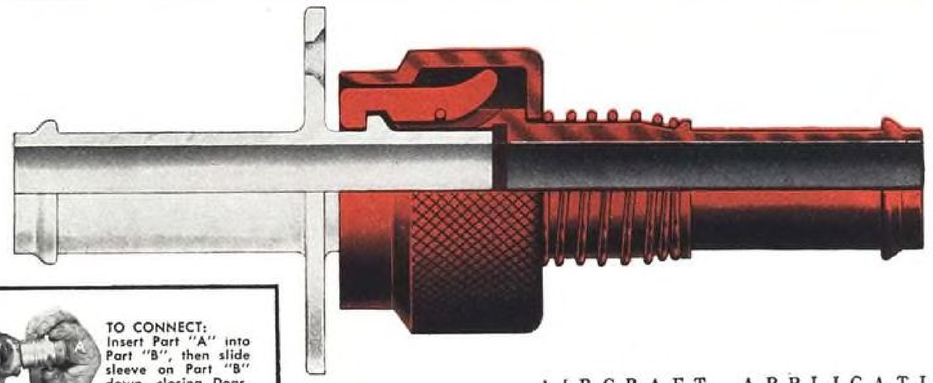



TO CONNECT:
Insert Part "A" into Part "B", then slide sleeve on Part "B" down, closing Dogs.

TO RELEASE:
Slide Sleeve Up.

HERE IS WHY WIGGINS QUICK DISCONNECTS ARE NOW SPECIFIED ON LARGE NUMBERS OF COMBAT PLANES:

SIMPLE—Only 2 moving parts (knurled ring and dogs).

LIGHT WEIGHT—1" size weighs only .4 pounds.

LONG LIFE—No radial motion to connect—saves gasket from abrasion. Ample safety factor.

EASY TO SERVICE—Gasket easily accessible—replaced in seconds. Integral parts fall apart on removal of spring.

EASY TO APPLY—No tools necessary—no threads to match—easily used where space prevents turning nut.

SAFE—Neither vibration nor crash landing affects connections.

VERSATILE—Supplied for pressures from 0 to 500 PSI. Holds 29 inches Hg. vacuum.
Gaskets OK for aromatic fuel
OK for engine lube oils
OK for Prestone
OK for alcohol and CO^2
OK at wide temperature range

FAST—Immediate for both connection and disconnection.

AVAILABLE—In wide range of sizes and designs.

DELIVERIES—On schedules.

Inquiries Solicited On Special Applications

AIRCRAFT APPLICATIONS:

FLIGHT—Fuel Lines, Fuel Vent Lines, Oil Lines, Oil Vent Lines, Heat and Vent Lines, Expendable Gas Tanks, Cooling Lines, Oxygen Lines, Fire Extinguisher Lines, De-icer Lines. Instrument Lines.

GROUND—Same as Flight for Engine Test Cells, Compressed Air Lines, Fire Hose Lines, Vacuum and Instrument Lines, Test Lines for Containers, Fuel Truck Lines.

Send for Informative Literature

E. B. WIGGINS OIL TOOL COMPANY, INC.

Main Office and Factory
3424 East Olympic Boulevard
Los Angeles 23, California
Phone Angelus 7238

Detroit Office
2159 General Motors Building
Detroit, Michigan
Phone Trinity 1-9260

MAIL TODAY FOR DETAILED INFORMATION

E. B. Wiggins Oil Tool Company, Inc.
3424 East Olympic Boulevard
Los Angeles 23, California

Gentlemen:

Yes, I would like to get more detailed information on how the Wiggins Quick Disconnect Coupling can be applied to our product.

NAME_____

ADDRESS_____

CITY_____ STATE_____

FIRM NAME_____ POSITION_____



No wonder he rode a brewery horse

WHEN the iron man of old rode forth to battle, he jogged along at a pretty conservative gait. What with his hand-wrought and riveted riding habit, chain-mail underwear, broadsword, lance, et al, his steed had to be built for heavy-duty rather than speed.

That was the price he paid for protection. Perhaps it wasn't too high then, but it would be today. Our modern "cavalry of the air" has the superlative protection of Hycar synthetic rubber in bullet-sealing tanks and hose, in hydraulic seals and diaphragms. At the same time Hycar is light—saves 20% to 25% in weight over many other synthetics, and its resistance to oil-absorption keeps it light. Speed, range and payload are the beneficiaries.

Aren't these the qualities you have wanted in oil and fuel hose, hydraulic lines, seals, gaskets, grommets, diaphragms and other resilient products you use? *Hycar Chemical Company, Akron 8, Ohio.*


LIMITED QUANTITIES OF HYCAR are now available to your rubber products supplier for experimental purposes without WPB allocations. This material may be used in the development and test of products for both present and future manufacture. It enables you now to gain actual experience with Hycar in many applications heretofore not permitted under war restrictions, but which may be vitally important to your post-war plans. Our technical staff and laboratory are ready to help.

Hycar

LARGEST PRIVATE PRODUCER OF BUTADIENE

Synthetic Rubber

Getting better welds on light metal – and more welding per generator –

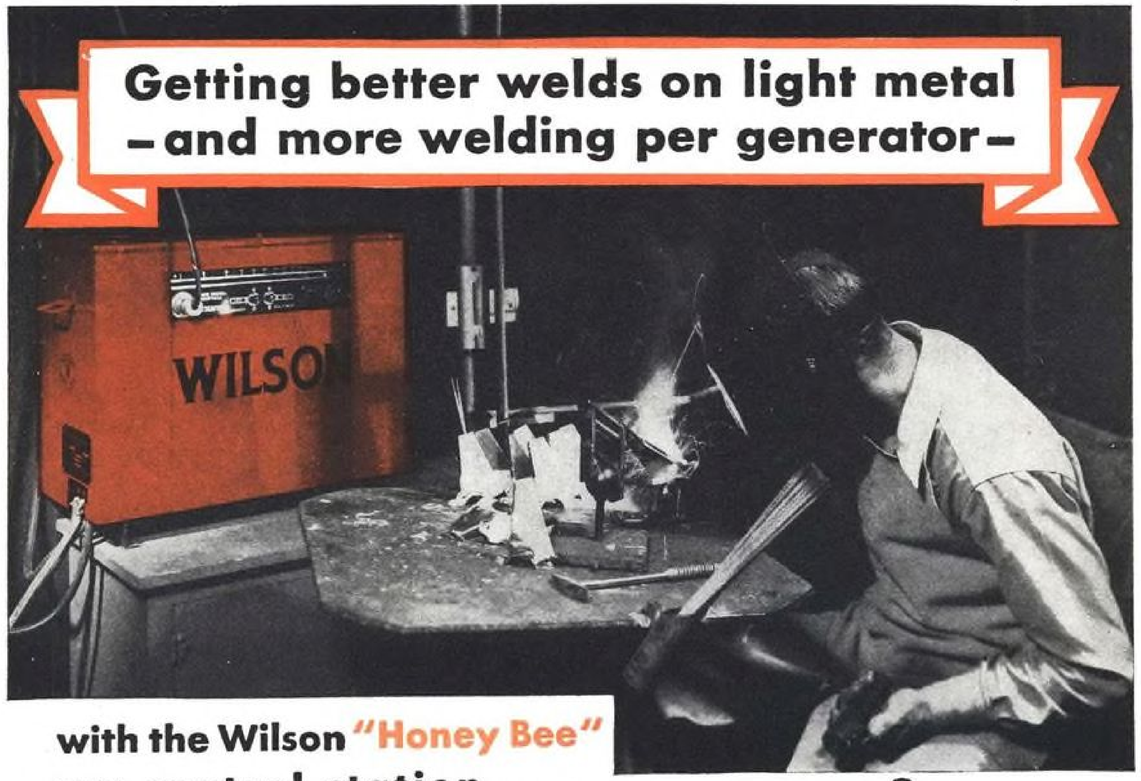


with the Wilson "Honey Bee" arc control station . . .

At Rohr Aircraft Corporation, Chula Vista, Calif. – as in leading aircraft plants everywhere – Wilson "Honey Bee" stations are helping to speed welding output and produce finer welds. Here's what the "Honey Bee" provides:

1. More arcs from every constant potential generator because two or more Wilson "Honey Bees" may be connected to each welding machine.
2. Better quality welds because Wilson Remote Crater Control enables operators to extinguish the arc slowly, thus preventing craters and porous welds.
3. More productive welding time since the "Honey Bee's" Remote Arc Control allows the operator to regulate his welding current from zero to maximum *while welding*—without changing the arc characteristic or affecting other "Honey Bee" stations working from the same generator.

The Wilson "Honey Bee" is made in 75 amp. and 150 amp. sizes. For further details write to Wilson Welder & Metals Co., 60 East 42nd Street, New York 17, N. Y.

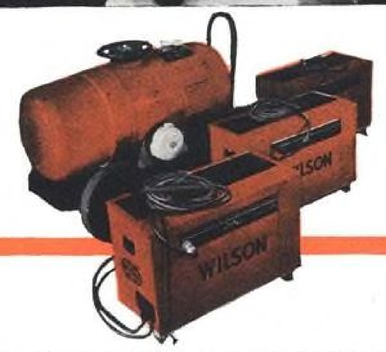

IDEAL POWER SOURCE . . . for "Honey Bee" stations, the Wilson "Hornet" welding generator is favored because of its smooth, reliable performance. For quick change from standard to constant potential characteristic and vice versa, a convenient switch may be mounted on the "Hornet". This feature makes the "Hornet" suitable for general purpose welding and for use with "Honey Bee" stations as desired.

WILSON WELDER and METALS CO., INC.

General Offices: **60 East 42nd Street, New York 17, N. Y.**

In the U. S. A.: **WILSON ARC WELDERS — *distributed exclusively through Air Reduction Sales Company***

In Canada: **G. D. Peters & Co. of Canada, Limited • Birks Bldg., Montreal**

Hamburg *Knocked Out!*



PAGES FROM AVIATION'S HISTORY

Fires burning in Hamburg after Allied bombers attacked and smashed the Howaldtswerke Shipyards, important U-Boat builders. (Acme Photo)


All-out aerial warfare has taken on new significance with the virtual obliteration of the arsenal city of Hamburg.

From the design conception of the planes, which took part in this operation, to the actual bombing runs over the target, is presented one of the greatest feats of detail planning and industrial production in all history.

The experience, ingenuity and strength of America's manpower, converted from peaceful pursuits to the job of winning this war is producing results. Hamburg is tangible proof.

Emerson-Electric Aircraft Motors are contributing to ultimate victory—to aviation history.

THE EMERSON ELECTRIC MFG. COMPANY
SAINT LOUIS • *Branches:* New York • Chicago • Detroit
Los Angeles • Davenport

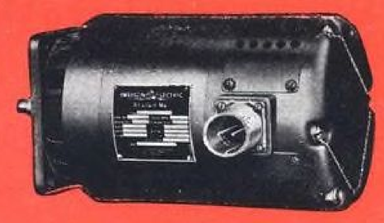

EMERSON-ELECTRIC AIRCRAFT MOTORS

Lightweight, compact, powerful motors are made by Emerson-Electric for aircraft gun turret drives, hydraulic units, fuel pumps, actuators, winterizing units, communicating systems—also with built-in gear, and magnetic brake.



Emerson-Electric is now engaged 100% in the production of equipment for the Armed Forces.

338

EMERSON ELECTRIC

MOTORS • FANS • APPLIANCES • A. C. ARC WELDERS

WHY CLEVIS BOLTS HAVE TO BE *Good*


The Clevis Bolt is a distinctive aircraft fastener. It takes a special thin nut which engages only two full threads of the bolt. It is therefore held to a closer thread fit than any other bolt.

Material is A 4037 Steel, heat-treated to a minimum tensile strength of 125,000 lbs. Centerless grinding holds these bolts to a tolerance of .002. The range of sizes is from $\frac{3}{16}$" (AN 23 Clevis Bolt) up to 1" diameter (AN 36), lengths from $\frac{3}{8}$" to 7".

"National" makes millions of Clevis Bolts for Army and Navy planes, to a high standard of quality undreamed of in bolt-making a few years ago.




(*Above, left*) Thread form comparator, used for checking form and lead—magnification 200 times. (*Right*) Hardness control by means of Rockwell testing machine.

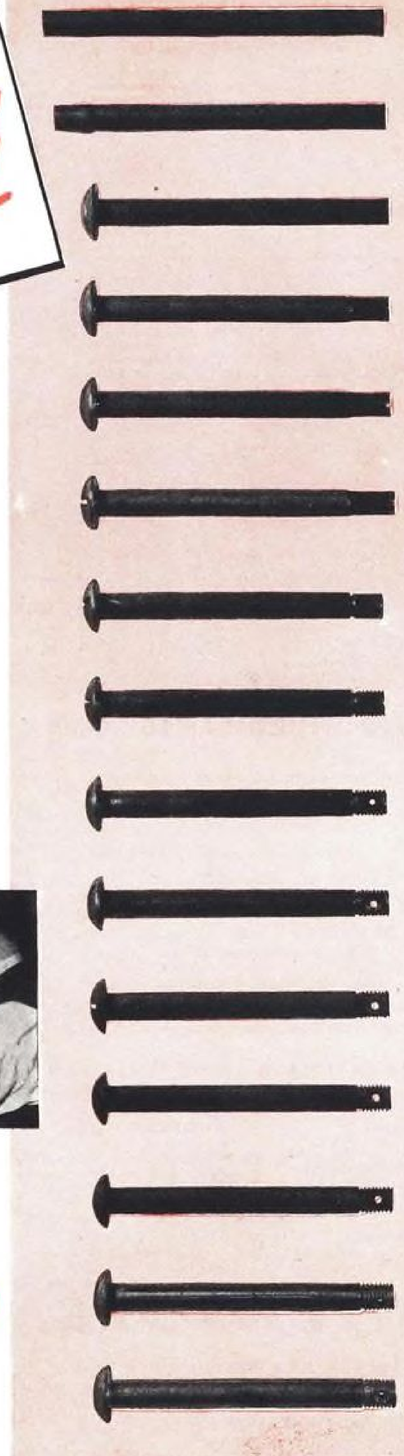

National HEADED AND THREADED PRODUCTS

THE NATIONAL SCREW & MFG. CO., CLEVELAND, O.

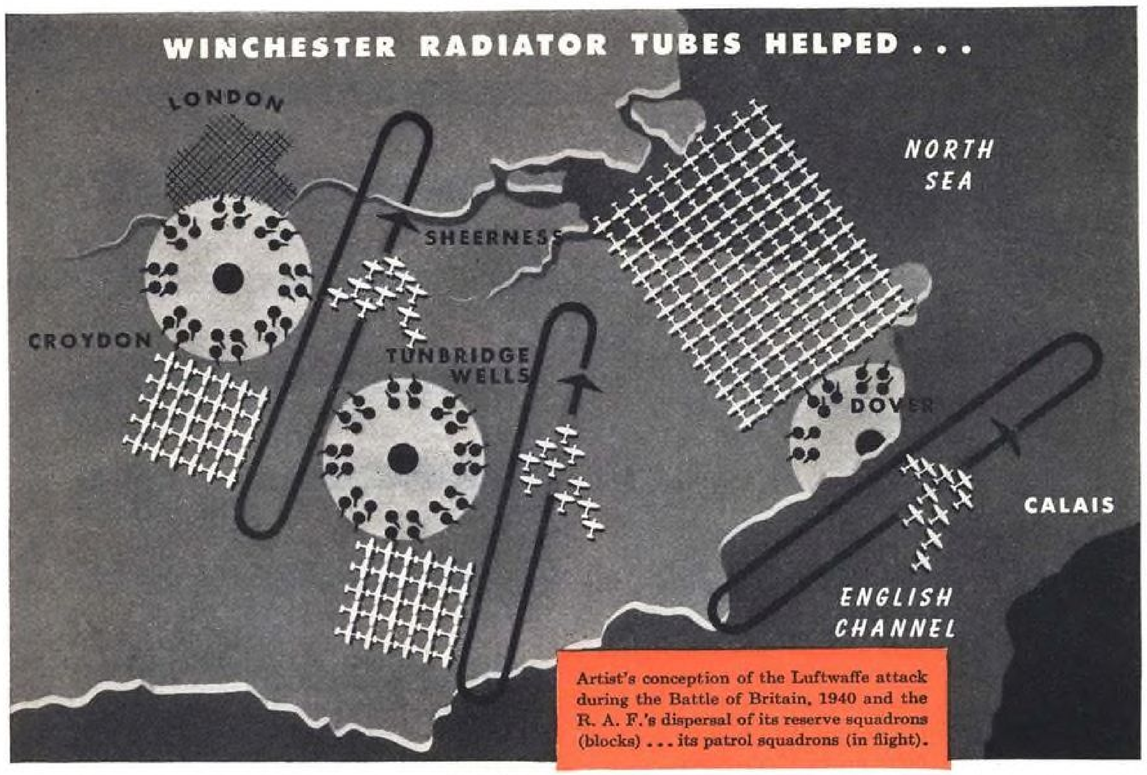

Artist's conception of the Luftwaffe attack during the Battle of Britain, 1940 and the R. A. F.'s dispersal of its reserve squadrons (blocks) . . . its patrol squadrons (in flight).

"SPITFIRES" AND "HURRICANES" CLEAR THE SKIES OVER BRITAIN IN 1940

The Battle of Britain is enshrined in Churchill's immortal words, "never in the field of human conflict was so much owed by so many to so few."

To have been a part of that heroic defense is an honor of which Winchester is justly proud. In 1938, Winchester engineers took to England the designs and machinery for setting up a plant to make Winchester Cartridge Core Radiator Tubes . . . and from then on, most British planes have been equipped with radiator tubes from this plant.

Made of pure copper, with walls only 6/1000ths of an inch thick, Winchester Radiator Tubes, thanks to Winchester's COLD copper-extrusion process, are seamless and so assembled that *their entire outer surface is cooling area.*

WINCHESTER RADIATOR TUBES RESIST CORROSION . . . DEFY BURSTING. Pure copper, Winchester Cartridge Core Tubes will not corrode under regular operating conditions. And they won't burst from freezing, because the coolant flows on the *outside* of the tubes. If freezing should compress a tube, causing a "set" and so restricting air flow, passing a rod through it restores it to normal shape.

IF WOUNDED THEY QUICKLY FLY AGAIN. Pictures below show how to replace Winchester Cartridge Core Tubes should they be punctured in action or by accident. They explain, too, why millions of Winchester Cartridge Core Tubes are used to keep planes, and tanks in constant action.


HARDER JOBS WANTED FOR THESE SENSATIONAL TUBES

No War Baby, Winchester Cartridge Core Tubes have 25 years of service behind their performance. They offer these spectacular features:

- Of pure copper, thus corrosion-proof.
- Seamless,—safe against leaks.
- Coolant on *outside*—no damage from freezing.
- 1,728 cartridge core tubes per square foot.
- Avoid waste space in radiator assembly— minimum of solder.
- Permit tailoring radiator, to fit any dimension or design.
- Provide up to 25% greater cooling per square foot than others.

WINCHESTER REPEATING ARMS COMPANY
New Haven, Connecticut
Division of WESTERN CARTRIDGE COMPANY

WINCHESTER
TRADE MARK
"On Guard for America Since 1866"

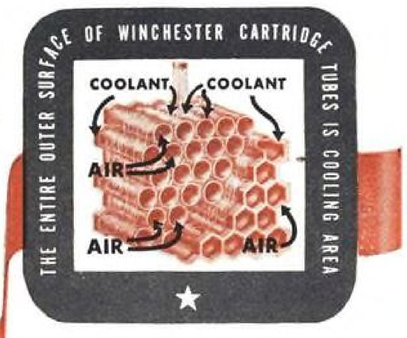




If out of your engineering knowledge, experience, research and skill you are contemplating a new fighting machine for Uncle Sam . . . are dreaming up a startling new post-war automobile, or similar product, write Radiator Division, Winchester Repeating Arms Company, New Haven, Connecticut.

COPR., 1943, WINCHESTER REPEATING ARMS CO., DIV. OF WESTERN CARTRIDGE CO.

RIFLES • SHOTGUNS • CARTRIDGES • SHOTSHELLS • CARTRIDGE CORE RADIATOR TUBES • FLASHLIGHTS • BATTERIES

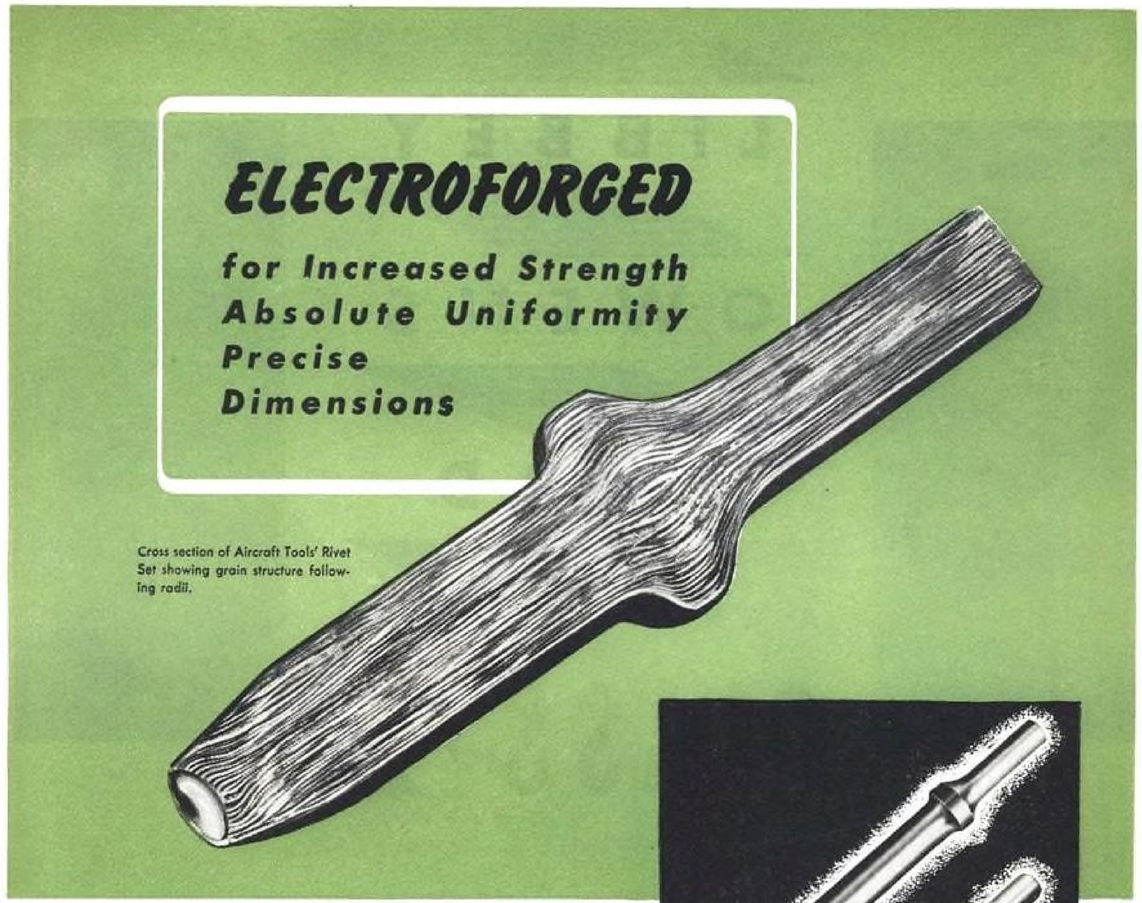



Aircraft TOOLS RIVET SETS

By an exclusive process, all *Aircraft* Tools Rivet Set shanks are forged, so that the grain structure follows the radii. This virtually eliminates breakage and insures accurate and uniform cup dimensions with highly polished cup surfaces guaranteed to conform to rivet heads. Rivet Set shanks are ground to accuracies of .0005" and are available in all sizes with round head, brazier head and modified brazier head.

Please write on company letterhead for Aircraft *Tools Catalog*



Aircraft TOOLS, INC.
LOS ANGELES 1, CALIFORNIA

*REG. U. S. PATENT OFFICE

FOREIGN REPRESENTATIVES: The A. R. Williams Machine Co., Ltd., Toronto, Hamilton and Vancouver, Canada ★ The Canadian Fairbanks-Morse Co., Montreal, Canada ★ Reginald M. Levy, Melbourne, Australia ★ Morris Black & Matheson, Ltd., Aukland, New Zealand Emilio Staub & Cia. Ltd., Sao Paulo and Rio de Janeiro, Brazil, S. A. ★ W. A. Ramsey, Ltd., Honolulu, Hawaii

LIBBEY OWENS FORD

A GREAT NAME IN GLASS

For many years the name Libbey·Owens·Ford has stood for Quality and Service in every field in which glass is used. Today, our government and the armed forces of the United Nations on land, sea and in the air have first call on our products and services, our Production and Research facilities and our Engineering developments — many of which have been converted to the highly specialized work required in the aviation field.

On the civilian front, Libbey·Owens·Ford products are being used in an ever-widening circle of applications — not only for their normal functions, but to replace those more critical materials demanded for the war effort. After the war, the familiar L·O·F Trade-Mark will have even greater significance to the glass users of America. Libbey·Owens·Ford Glass **Co.,** 74113 Nicholas Building, Toledo 3, Ohio.

Manufacturers of Clear Vision Window Glass, Thermopane, Polished Plate Glass, Tuf-flex, Golden Plate, Vitrolite, Vitrolux, Thermolux, Bent Glass, Glastone, Heat Absorbing, Optical and many other decorative and specialty glasses.





Design the Future

IN STAINLESS STEEL

Making its bid as the family runabout of the future is a new type of aircraft . . . a craft that can land on a garage driveway, fly in reverse or sideways as well as forward, or hover indefinitely over one spot . . . the helicopter. Its possibilities are already challenging aircraft designers.

The propeller or rotor serves as the wings, producing lift by horizontal rotation. Obviously, the propeller blades must be exceptionally strong, yet light in weight. The body must be sturdy enough to take the shock of vertical landings. The material specified for the construction of helicopters, therefore, must resist wear and impact, and corrosion from weather and water, while maintaining a high strength-weight ratio. Stainless steel fulfills all of these requirements, and has lasting beauty as well.

Are you designing a new product to compete in postwar markets? Or, are you streamlining an old product for renewed competition? If so, plan your future with stainless steel. Today, stainless steel is important in war work. When the war is over, it will be available to make your blueprints reality.


We do not make stainless steel, but we produce the alloys used in steelmaking. Our metallurgists have a background of over 35 years' experience with stainless and other alloy steels. If you have a problem in the selection, fabrication, or use of alloy steels, consult us.


BUY UNITED STATES WAR BONDS AND STAMPS

ELECTRO METALLURGICAL COMPANY
Unit of Union Carbide and Carbon Corporation
30 East 42nd Street UCC New York 17, N. Y.
In Canada: Electro Metallurgical Company of Canada, Limited, Welland, Ontario

Electromet
Trade Mark
Ferro-Alloys & Metals

No "chicken-necked" SOCKET SCREW can survive this Twist...

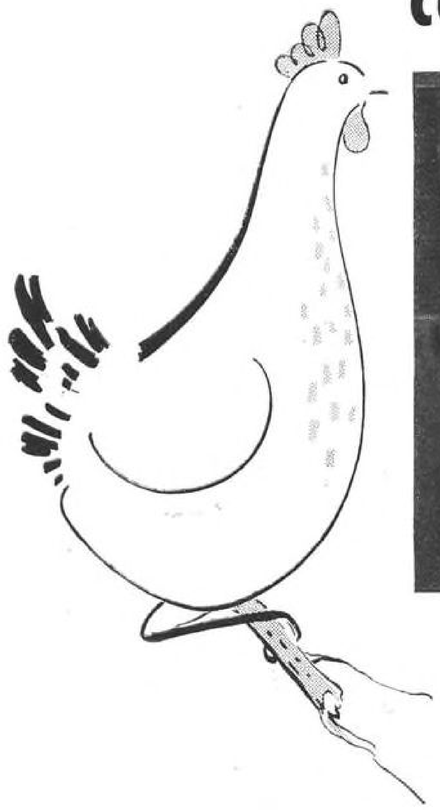

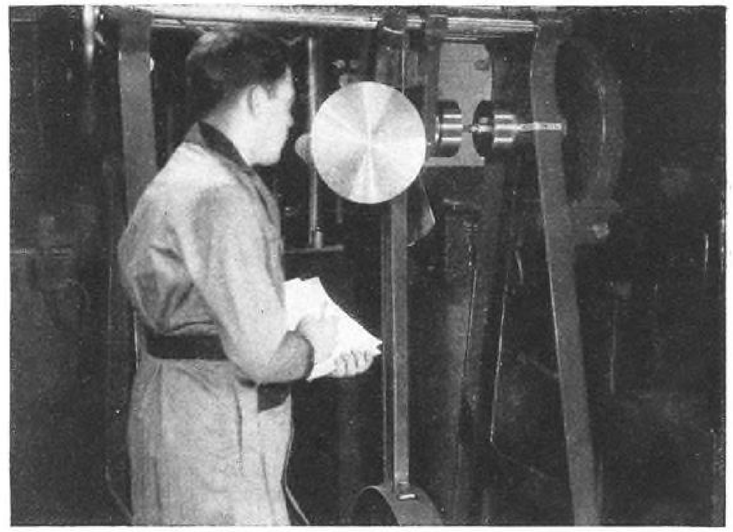

Brutal overloads applied in Torque Test make sure P-K Socket Screws will more than meet setting-up stresses . . .


To make sure you get no "chicken-necks" among Parker-Kalon Socket Screws, thorough tests are made in the P-K Laboratory with this steel-muscled twister that develops torsional stresses far beyond normal. For example, a P-K ½"-20 (N.F.) Cap Screw must withstand a 2200 inch-pound minimum load. These tests make sure that any P-K Socket Screw can be set up as tight as required without danger of the head twisting off.

The torque test is only one of 16 check-ups made to assure the unfailing performance of P-K Cold-forged Socket Screws. This rigid routine of *quality control* eliminates the "doubtful Screws" – screws that *look* all right, but some of which fail to *work right*. Socket Screw users need this protection today more than ever. Specify "Parker-Kalon" next time you order . . . it costs no more. Parker-Kalon Corp., 192 Varick Street, New York 14.

This 16-point "Quality-Control" protects P-K Socket Screw Users

1–Chemical Analysis. 2–Tensile Strength. 3–Ductility. 4–Torsional Strength. 5–Ability to take Shock Loads under Tension. 6–Resistance to Shock Loads under Shear. 7–Hardness. In addition, there is a rigid inspection of these essentials: 8–Head Diameter. 9–Head Height. 10–Concentricity of Head to Body. 11–Socket Shape. 12–Socket Size. 13–Socket Depth. 14–Centricality of Socket. 15–Class 3 Fit Threads. 16–Clean Starting Threads.

PARKER-KALON
Quality-Controlled
SOCKET SCREWS

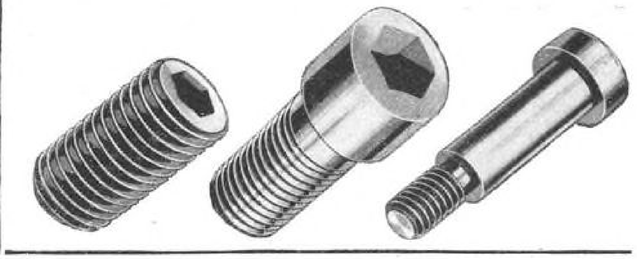

WARTIME LESSONS in Aluminum Castings

According to WPB figures, the average American-built war plane contains seven and one-half tons of aluminum; some of the larger bombers carry more than double that weight of aluminum parts. Aluminum castings are an important part of this tonnage. It has been our privilege to produce a part of this tremendous volume of aluminum castings for planes and other armaments. Some of these castings go far beyond pre-war limitations in size — others are of extremely intricate shape and coring. Plane and engine builders have learned that there is no aluminum casting job too large, too small or too complex for Howard Foundry. Deliveries are made on schedule—or sooner. Current accomplishments in aluminum castings indicate more extensive peace-time applications. In aircraft this is definitely assured. To mention another field—trucks and buses—weight savings of great value will be secured by the broader use of aluminum cast parts in the designs of tomorrow and we hope to figure prominently in these revolutionary improvements, which will embrace a wide range of products.

The three Howard foundries—aluminum, magnesium, bronze—embody the largest jobbing production of nonferrous castings in America; all of which is now being poured for the war effort.

When you need nonferrous castings, check with Howard first.

For armament today—for utility tomorrow.

HOWARD FOUNDRY COMPANY
4900 Bloomingdale Rd., Chicago



ARMY E NAVY

Now Make THOUSANDS More

HOWARD

ALUMINUM · BRASS · BRONZE · MAGNESIUM CASTINGS



SO WE "AIR-CONDITIONED" THE CARBURETOR

Deep in the hot, sweating, equatorial jungles, the high humidity and air temperatures ranging upward to 120° F. presented an unusual problem in the installation of engine test equipment. As operating conditions on the test stand should approximate flight conditions, the air feeding to the carburetors was too hot and too moist to permit accurate results. So Jacobson engineers designed the job with an "air-conditioning" unit to provide conditioned air to carburetor and super-charger air-intakes of engines on the stands.


Meeting such unusual or unexpected problems with skill and resourcefulness comes from Jacobson's long experience in working with all phases of engine test equipment—design, engineering, construction, service. Consult us on any test equipment problem.

JACOBSON & COMPANY, INC.
ENGINE TEST EQUIPMENT

EXECUTIVE OFFICES: 335 EAST 45th STREET, NEW YORK 17, N. Y.
In Canada: JACOBSON & COMPANY CANADIAN LTD., MONTREAL, P.Q.



Skyloader metal tie-down rods attached to deck rings, and hardwood beams locked tight against the cargo make it part of the airplane. All slack is removed!

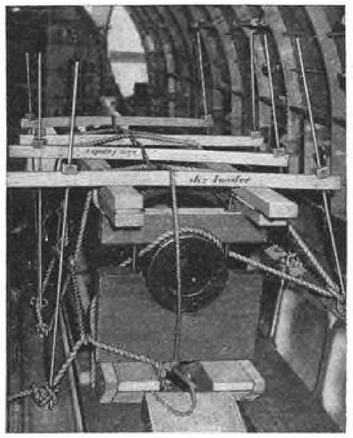

The Skyloader kit makes possible a tie-down combination of rods, beams, ropes and rope tighteners to hold odd-sized freight in flight secure against all strain.



bound for Burma

Over the trackless wastes of the Far East, the impassable jungles and "bad lands" of the world go sky-borne cargoes—today, guns and supplies of war—tomorrow, the goods of peaceful commerce.

Designed to simplify and systematize the new job of stowing air cargo, the Evans Skyloader method brings safety, speed and lightness to air shipments.

Evans Skyloader method offers: 40 to 50 per cent saving in the tie-down time of on- and off-loading; safety in flight for personnel, cargo and plane; important reduction in the weight of lashings and the use of costly rope.

On thousands of flights for military commands as well as commercial air shippers, Evans Skyloader method is proving its efficiency. Our engineering staff will gladly study your special loading problems.

★ ★ ★

Vision to Anticipate the Needs of Tomorrow
Creates New Industries Today

PRESIDENT

EVANS PRODUCTS COMPANY
DETROIT

Evans War Products: Machine Gun Mounts • Tank and Automotive Heating and Ventilating Equipment • Evanoil Water Heaters • Aircraft Engine Mounts • Airplane Landing Gear Beams • Battery Separators • Prefabricated Houses • Plywood • Skyloader • Utility Loader • Auto Loader • Auto-Railer • Auto-Stop • Stampings

They come back to go forth again . . . .

America's mighty new bombers not only blast each selected objective, despite heavy flak and hostile aircraft, but they throw a deadly fire in any direction, inexorably depleting enemy air power. And how they can take it! Even when bullet riddled and with several engines out, they return safely to their bases, soon to fly again.

In an ever increasing quantity, America's aircraft plants are releasing these rugged bombers. And twenty-four hours a day we are turning out super-tough drop forgings to give these planes greater ability to resist the stresses of flight and combat. The entire output of our large new, completely equipped drop forging plant is devoted to the production of airframe forgings — for engines, struts, wings, fuselage, bomb racks and other crucial plane parts.

We are serving many plane and engine builders now — maybe we can aid you on your drop forging requirements.




Member of the A.C.C.A.


Kropp Forge Aviation Co.

5301 W. ROOSEVELT ROAD CHICAGO

Engineering Representatives in Principal Cities

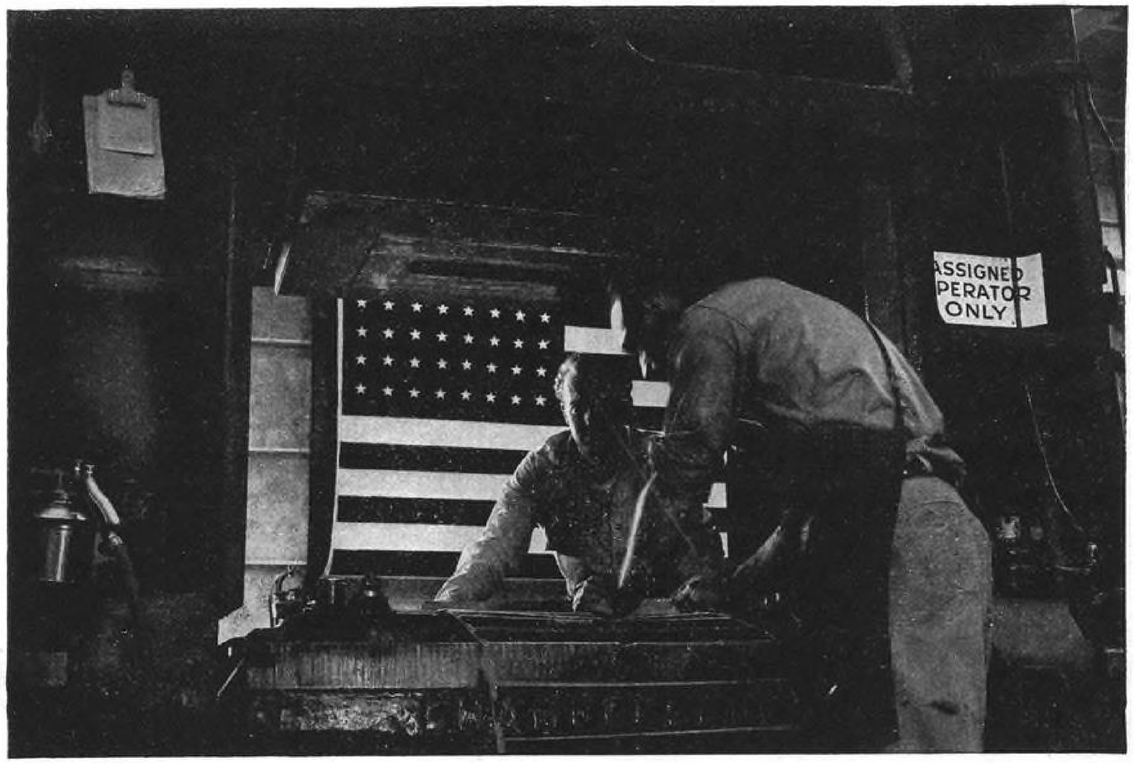

THE CECOSTAMP SOLVES NEW METAL FORMING PROBLEMS

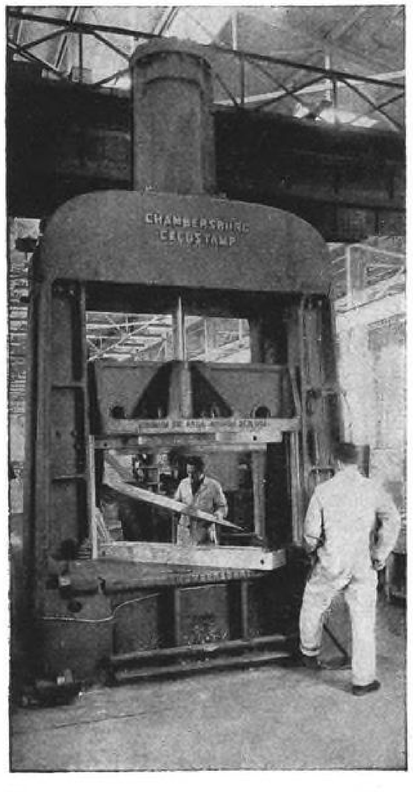

THE newer sheet metal forming problems posed by the needs of the aircraft industry included the need for a means of forming tougher, more elastic alloy sheets in clear-cut die impressions without tearing, wrinkling or reduction of section, to accurate limits without mismatching, and of speeding the production of these badly needed parts.

The Cecostamp was designed by Chambersburg to meet and solve these problems. How well it has done so is indicated by the fact that practically every aircraft manufacturer in the United States, and many of the most important ones in the countries of our Allies, are using Cecostamps for the production of alloy sheet metal parts.

And while wartime production is now absorbing all the Cecostamps that can be built, it is evident that their adaptability to peacetime production will disclose further possibilities of wider application.

CHAMBERSBURG ENGINEERING CO. • CHAMBERSBURG, PENNA.

CHAMBERSBURG
CECOSTAMP

PN
Now!
9 SIZES
IN
PRODUCTION

1/16" cable size
3/32" cable size
1/8" cable size
5/32" cable size
3/16" cable size
7/32" cable size
1/4" cable size
9/32" cable size
5/16" cable size

The new P & N Socketype* Cable Terminal is approved as interchangeable with B & C types of present standard AN 667 & 668

*Pat. Applied for.



Specification sheet and folder available to industry personnel.



ESTABLISHED 1922

POULSEN & NARDON, INC.
LOS ANGELES 11, CALIFORNIA



WALDES TRUARC RETAINING RING

Waldes Truarc presents a significant advance in retaining rings.

It spreads or contracts without distortion; always retaining its perfectly fitting circular contour.


For thrust-load fixing, shaft and housing applications, Waldes Truarc provides distinct advantages over nuts and bolts or wedges and washers. It reduces dimension and weight, saves material, cuts manufacturing time . . . simplifies assembly and dis-assembly.

On request, we will gladly furnish samples and full data for your tests.



WALDES KOH-I-NOOR INC • LONG ISLAND CITY, N.Y.

U. S. Pat. Re. 18,144. Sole Manufacturers in U. S. A.

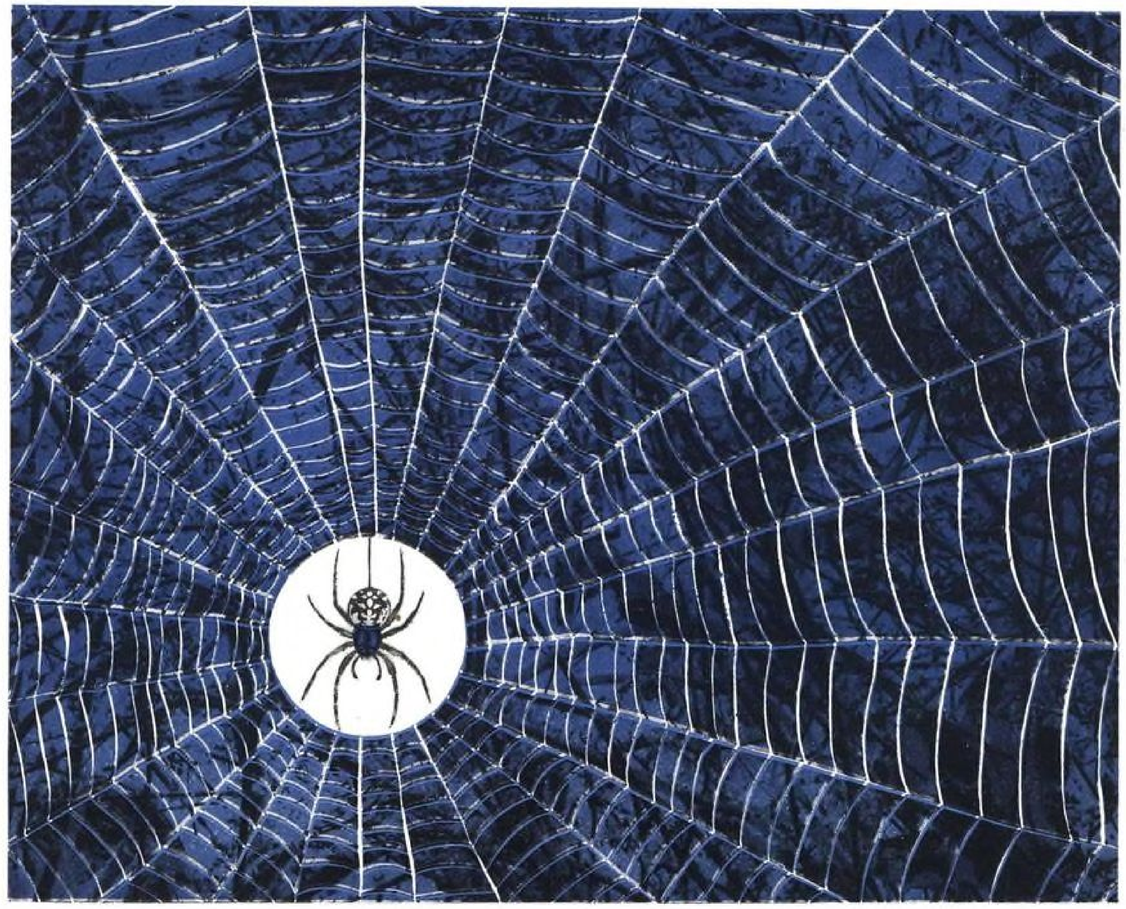

The story of a master weaver...


EVER WATCH a garden spider at work? It's no beauty itself—but what it can do in producing beauty! It weaves filaments of silk—silk it made itself—into strands 100 times finer than human hair, yet stronger than its equivalent in steel!

And because of its inexhaustible energy, it often completes an entire web in 30 or 40 minutes. This high-speed production requires extraordinary coordination of all 8 legs as the spider balances and guides the silken filaments into patterns of geometric perfection.

But if you think Nature can't be equalled, here's one to make a spider green with envy: On one job, a 2⅝" Six Spindle Conomatic in 12 seconds per piece completes 10 operations, one of which comprises drilling an eccentric hole without stopping the spindle. Operating 140 hours a week, Cone Multiple Spindle Automatic Lathes are today turning out millions of shell bodies and precision parts for guns, tanks, airplanes.

In peacetime, the mass production of metal parts is an economic necessity . . . in wartime, a military necessity. That's why the Cone Multiple Spindle Automatic Lathe, one of the key production machines of peacetime industry, is of such vital importance in wartime.

In the peace to come, Cone Multiple Spindle Automatic Lathes will be used in many operations for production **10 times faster** than is possible by many methods now in use. That's why Cone Automatics will help in the weaving of tomorrow's web of destiny.



CONE Automatic Machine Company, Inc., Windsor, Vermont



The "SKYMASTER" *swoops to conquer* ON AEROLS*

"Mission completed", is the terse message flashed to headquarters as this giant troopship makes a safe Aerol landing at an advanced air base.

Called "Skymasters", Douglas C-54 transports have a load carrying capacity equal to a railroad boxcar. Despite their great weight, these aerial leviathans land with remarkable ease because the shock is absorbed by Aerols.

The protection Aerols give on the troopships of today forecasts the safety they will provide on the peacetime transports of tomorrow.

THE CLEVELAND PNEUMATIC TOOL COMPANY
AIRCRAFT DIVISION • • CLEVELAND, OHIO

Also Manufacturers of Cleco pneumatic tools for the aircraft and general industry, Cleco sheetholders, Cle-Air shock absorbers for trucks and buses, and Cleveland rock drills for mining and construction work.

AEROLS*

*THE SHOCK ABSORBING UNITS ON AN AIRPLANE'S LANDING GEAR; THE NAME IS DERIVED FROM THE WORDS "AIR" AND "OIL"—THE FLUIDS USED TO DISSIPATE THE LANDING SHOCKS

Why Is an RCA Electron Tube Like Sherlock Holmes?





THINGS that were beyond the ken of ordinary mortals were "elementary" to the man in the fore-and-aft cap.

And why was this?

Simply because Holmes could analyze more deeply, see more thoroughly into the core of things, be more observant of little things than anyone else.

A modern Sherlock Holmes is the RCA Electron Tube employed in an electronic device to check tungsten wire leads for radio tubes.

With this difference: Sherlock master-minded *after* the crime. The electron tube in this device is the magic brain that detects microscopic flaws in wire leads *before* they can cause harm!

For with the aid of this device, powered with an RCA electron tube, a tiny flaw in a wire can be discovered instantly—and the faulty wire rejected before it finds its way into a completed tube assembly resulting in a leaky tube.

This is electronics in action *now*—at RCA.

Although your problem may be the detection of flaws in material other than wire, this basic principle of detection may offer very real possibilities. There are few problems of this or associated types that the electron tube cannot solve to advantage. If your production warrants a priority, your engineers may be able to build such a device around an RCA Electron Tube. The know-how exists at RCA—*for the magic brain of all electronic equipment is a tube, and RCA is the fountain-head of modern tube development.*

May we send you the illustrated booklet "Electrons in Action at RCA"? Write Room 450, Tube & Equipment Dept., *RCA Victor Division*, RADIO CORPORATION OF AMERICA, *Camden, New Jersey.*

TUNE IN "WHAT'S NEW?" *RCA's great new show, Saturday nights, 7 to 8, Eastern War Time, Blue Network.*



To detect flaws in wire leads for RCA tubes, wires are tested by placing them in the magnetic circuit of one of two radio-frequency electronic oscillators. These oscillators are coupled to produce a beat frequency which is dependent on the relative frequencies of the two oscillators. Since a faulty and a perfect wire produce different beat frequencies, as shown by an output meter, an observer watching the meter can instantly detect and reject the faulty piece.

RCA ELECTRON TUBES

The Fledgling Has Grown His Wings




Fenn's Aviation Parts Production was only in its infancy at the start of the war, but now the fledgling has grown its wings. It's on its own . . . FENN AIRCRAFT DIVISION . . . with its own plant at New Britain, Connecticut.

Fenn Aircraft is headed by a capable staff of engineers and production men, well versed in tool design and tool engineering. Forty years experience in precision manufacturing to close tolerances is behind this staff.

Fenn Aircraft is specializing in the manufacture of precision-built parts which are assembled into components before shipment. These sub-assemblies are ready to be put right on the assembly line, accurately built to the specifications of the aircraft manufacturer.

Fenn Aircraft NEW BRITAIN CONNECTICUT

DIVISION OF FENN MANUFACTURING COMPANY
MANUFACTURERS OF AIRCRAFT SUBASSEMBLIES AND PARTS

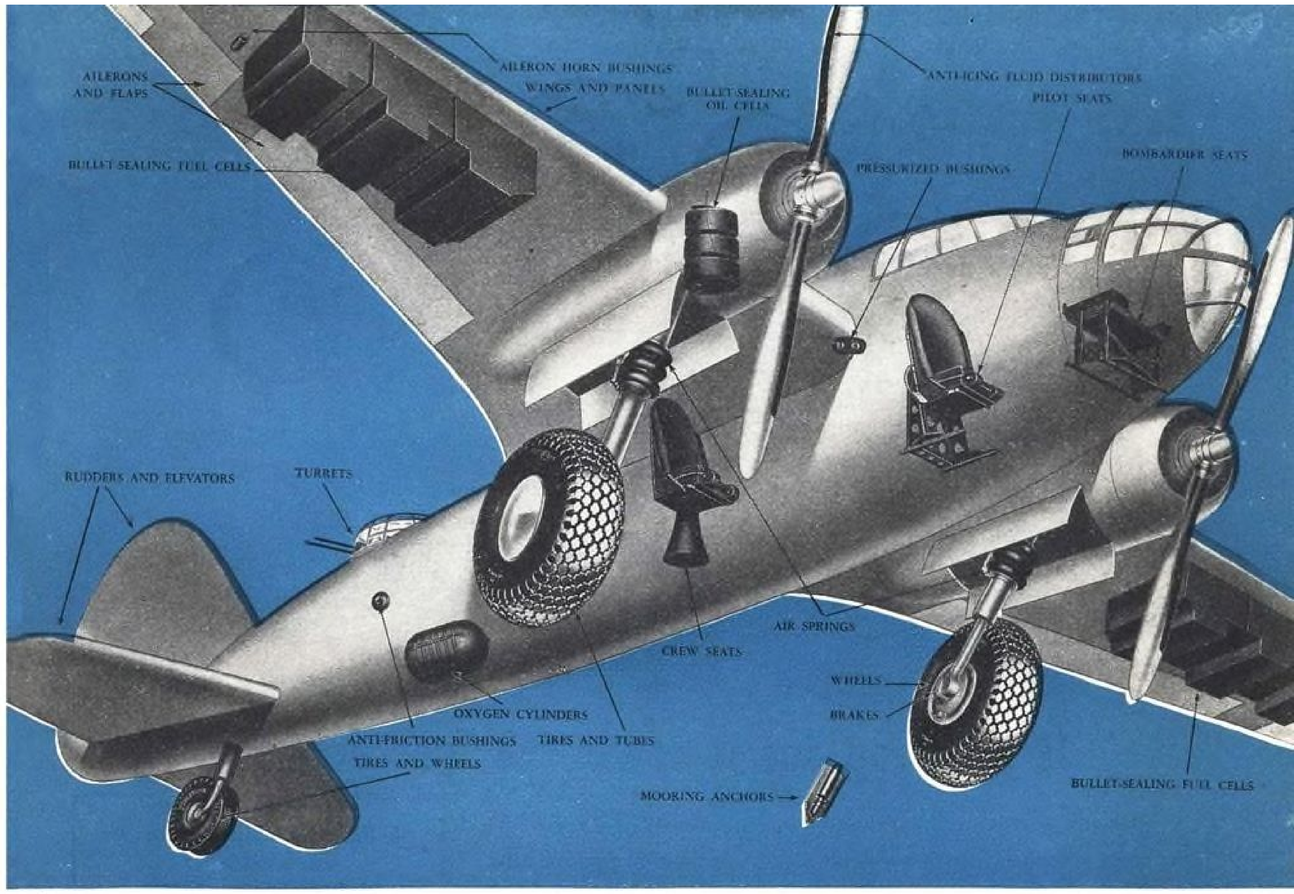

RIGHT ON THE PRODUCTION BEAM

FIRESTONE is always ahead in the development of new products for the aircraft industry — and ahead in production as well, supplying a wide variety of parts and equipment.

Our tremendous production capacity enables us to provide you with on-schedule service in the delivery of bottleneck products.

Our skilled rubber chemists, seasoned engineers, expert metallurgists, and plastic research men may help you solve a critical problem in design or construction.

This experience can be of value to you in many ways — our multiple services are at your disposal — and our engineers and technicians are at your command.

Listen to the Voice of Firestone with Richard Crooks and the Firestone Symphony Orchestra, Monday evenings, over N. B. C.

Firestone
AIRCRAFT COMPANY

SHIP BY AIR



If you drop one it spoils the "performance"

Balance weight against dust-capturing ability. Efficiency at high velocities against low resistance. First cost against long life and dependability. Weigh them all against expected service conditions.

That's the way to build an aircraft filter. It's the way to select one, too.

For nearly 20 years, Air-Maze engineers have worked with plane and engine builders to develop the best balance of filter characteristics for aircraft application.

As a result, from the smallest trainer to the biggest bomber, Air-Maze filters safeguard engine performance with a dependability that can only come from accurately balancing filter qualities to meet the needs of the various types of planes and service conditions.

It's a good thing to keep in mind when your mind is on aircraft filters.

A Few Typical AIR-MAZE *HIGH-VELOCITY* Aircraft Engine Filters



How much Lighter?

We will gladly tell you the advantages of weight savings and efficiency of Air-Maze filters. Include engine and installation data with your inquiry.

AIR-MAZE CORPORATION • ***Engineers and Manufacturers*** • **CLEVELAND 5, OHIO**

AIR-MAZE

SPECIALISTS IN AIR FILTRATION



"LIKE 15 HOLLYWOOD THRILLERS ROLLED INTO ONE"

So wrote an American Air Force Captain in describing the terror spread in the invasion of Sicily by North American's A-36 fighter-bombers as they hurtled earthward.

The Captain's enthusiasm for the A-36 led him to describe it further as "the greatest dive-bomber and low-altitude fighter in the world."

Here at Taylor we are proud to be mass-producing the Plastic trim tabs that help to give this great airplane its stamina and maneuverability. Laminated Plastics by Taylor are performing many different functions for America's leading warplanes, but none so clearly demonstrates the strength and toughness of Laminated Phenolic Plastics as the trim tabs on North American's A-36—"the greatest dive-bomber in the world."

TAYLOR FIBRE COMPANY

NORRISTOWN, PENNSYLVANIA
OFFICES IN PRINCIPAL CITIES
PACIFIC COAST HEADQUARTERS: 544 S. SAN PEDRO ST., LOS ANGELES

LAMINATED PLASTICS: VULCANIZED FIBRE • PHENOL FIBRE
SHEETS, RODS, TUBES, AND FABRICATED PARTS

Flexing doesn't weaken AMERFLEX

Reg. U. S. Pat. Off.

Amerflex plastic-covered conduit assemblies pass the flexing test with flying colors. And here's the reason: the light, tough, abrasion and moisture-resistant synthetic tubing employed in their manufacture is applied cold by a patented Searle process. Once in place, the covering grips the metallic base firmly and evenly. The result—a smooth finish . . . securely seated ferrules . . . closely held o. d. dimensions . . . and a covering that is not weakened by flexing.

Amerflex assemblies are sold under a service plan which 1) prevents waste due to engineering changes; 2) reduces conduit assembly inventories; 3) lowers conduit assembly costs; 4) reduces scrap by eliminating rejects; 5) ends possible conduit bottlenecks.

At your request, a representative will be glad to discuss the "Searle Conduit Assembly Service Plan" with you. We also invite you to submit your conduit engineering requirements.

SEARLE AERO INDUSTRIES, INC.

ORANGE, CALIFORNIA



3 Types of Amerflex. *Type* I—plain, uncovered flexible metallic conduit. *Type* II—synthetic-covered flexible metallic conduit. *Type* III—synthetic tubing with fittings, but without metallic conduit.



Assembly Sizes. *Type* I assemblies are made in any length and inside diameters of 3/16" to 2½". *Type* II and III assemblies are made in any length and in inside diameters of 3/16" to 2".



Ferrules. Amerflex ferrules are held in place by two grooves. One provides a moisture-proof seal; the other, channeled firmly into the metal conduit, provides a strong, lasting grip.



Cold, Heat Resistance. Amerflex tubing, opaque, withstands continuous temperatures of 200° F., remains pliable at -40° F. Temperature ranges for transparent tubing go from 188° F to - 64° F.



FOURTEEN years ago a newly born Pan American Airways Clipper took its first air step.

The world shrank . . . new plane designs squeezed miles into seconds. Clipper routes grew faster, safer.

Air advancement was paralleled by oil progress. Pan American and Wolf's Head worked closely to help the Clippers link continents together by air.

Wolf's Head Aviation Oil has been "the choice of the Clippers" for over ONE BILLION passenger-miles.

Wolf's Head Oil Refining Co., Oil City, Pa., New York 10, N. Y.

WOLF'S HEAD

100% PENNSYLVANIA

AVIATION OIL

P.G.C.O.A. WOLF'S HEAD MOTOR OIL AND LUBES Permit No. 6

Rarin' to Ride with Romec



This pilot is rarin' to go. He has confidence in the folding wings, the motors and the pumps. ★ Romec Vacuum Pumps are standard in this all-altitude fighter in the 400 m.p.h. class. ★ We repeat the fact that there is no substitute for *dependability* in aircraft pumps and accessories.


ROMEC PUMP COMPANY • ELYRIA, OHIO • U.S.A.

Makin' the Grade... A LYCOMING FEATURE



THE DAY YOU PUT THE FIRST SOLO FLIGHT BEHIND YOU!

No. 5 of a series sketched from life by Clayton Knight



Lycoming Model O-435-T six cylinder opposed 162 net horsepower engine complete with cooling fan and cowling for submerged installations.

MAKERS OF Avco PRODUCTS

In spite of the Axis' head-start to war, America's airmen are going into action the best-trained flyers on earth. There is pride in that for every American. There is especial pride for the people of Lycoming, where thousands upon thousands of engines for training planes are made. Dependability is a Lycoming watchword. Today it is one we guard more jealously, if possible, than ever before!

LYCOMING
AIRCRAFT ENGINES

LYCOMING DIVISION — THE AVIATION CORPORATION, WILLIAMSPORT, PA.



ONLY ONE WAY to correctly tension a stud or bolt!


Snap-on Torqometers insure accuracy... tell tension as nut is tightened!

The only way to be certain of correct tension is to *know* the tension . . . accurately . . . as the nut is tightened. In many operations "guesswork" tightening can cause endless trouble. Snap-on Torqometers make precision tensioning as simple as reading a dial. Their use insures predetermined accuracy on fine assembly work, and prevents mechanical distortion in cylinder heads, bearings, propeller mechanism, superchargers, etc. As easy to use as an ordinary wrench. Their accuracy is no way affected when used with extension bars or universal joints.

Snap-on Torqometers are available in a wide range of capacities, from 150 in. lbs. to 2,000 ft. lbs. Full information available on request. Write —

Snap-on Tools
THE CHOICE OF BETTER MECHANICS

SNAP-ON TOOLS CORPORATION
8020-L 28th Avenue Kenosha, Wisconsin

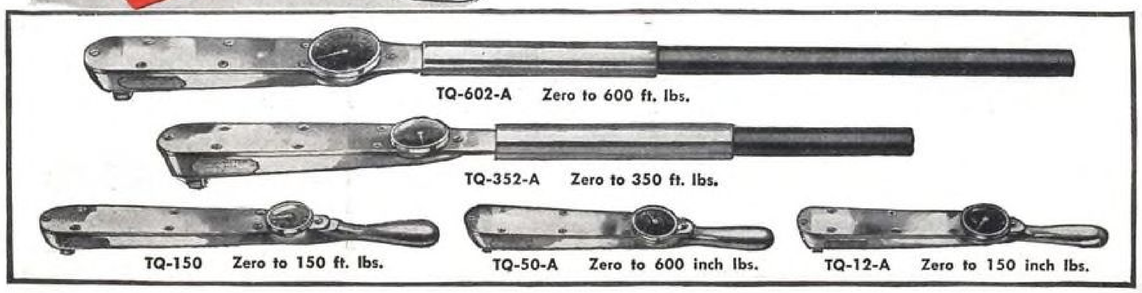



WAR IS A GRIND!



Let's face it squarely! War is hell on the battlefronts——a terrific grind at the work benches of industry. While *long range* postwar planning is essential to winning the peace, it should not interfere with speeding the peace. The "*long range*" with which we must first concern ourselves is the range of our airplanes——airplanes which have yet to free the prisoners of Bataan... have yet to blast the Nazis from the war... have yet to bring the war in all its destructive horror to the very islands of Japan.

Only by grinding faster, more accurately, more intelligently *today*, can we hasten the day when the machinery of industry and the labor of free Americans can again produce peacetime products.

ARMY (E) NAVY

SOLAR
EXHAUST SYSTEMS

SOLAR AIRCRAFT COMPANY ★ SAN DIEGO 12, CALIFORNIA

The Basic Advantages of

SUPERIOR SMALL METAL TUBING

are the same in peace as in war

- In planning for tomorrow, make use of our experience yesterday and today . . . production in tubing from $\frac{5}{8}$" O.D. down in seamless and drawn welded.*

*"Weldrawn" Stainless and "Brawn" Monel

SUPERIOR

The big name in SMALL TUBING *for Uncle Sam!*

SUPERIOR TUBE COMPANY, NORRISTOWN, PENNSYLVANIA

FOR EVERY SMALL TUBING APPLICATION

Tubing from 5/8" OD down...SUPERIOR Seamless in various analyses. WELDRAWN Welded and drawn Stainless. BRAWN Welded and drawn "Monel" and "Inconel". SEAMLESS and Patented LOCKSEAM Cathode Sleeves.



Giant in a bottle!

Compressed in a handy cylinder, ready to go to work at an instant's notice, lives a mighty giant—named Carbon Dioxide. A container only 3 3/16 by 9 1/8 inches holds 42,000 foot-pounds of energy—available at the turn of a valve!

Walter Kidde & Company has developed many interesting applications for this gas-under-pressure. In the aviation industry, it's serving as a source of emergency power when the hydraulic system is crippled in combat. It opens bomb-bay doors, lowers landing wheels, powers the brakes.

If you have a problem in power actuation, carbon dioxide may be your solution. Kidde engineers can help you design cylinders, valves, release mechanisms, etc., to harness this high-pressure gas to the job you want done. Just drop a line to our Research and Development Department.



WALTER KIDDE & COMPANY, INC., 1116 MAIN STREET, BELLEVILLE, N. J.

PIONEER PARACHUTES

Selected for the Job

From the very beginning Pioneer's development, design and engineering has played a vital part in the advancement of parachute safety. That is why today, after rigid tests under all types of conditions Pioneer Parachutes are universally recognized and accepted as standard.


Pioneer Parachutes provide the split second timing and precision performance that saves lives. Packed thin, they are compact and snug fitting; light, they save weight without sacrificing strength; require less seating space, fit easily into cramped quarters; permit easy escape.

No wonder the boys who wear 'em . . . who are responsible for the growing list of air victories . . . and the officers who direct air operations all agree that Pioneer Parachute will do the job.





IN PACK



IN ACTION

PIONEER FOOL PROOF - FOUL PROOF PILOT CHUTE

Attached to the apex of the main canopy, there are no parts to break, no exposed springs to pinch or bind, no ribs to poke through or hook under the main canopy skirt or jam or bind pack cones. In pack, it folds wafer thin. In action, it is instant, powerful, positive.



Model P1-B-24

Ultra thin back type chute. 20% less weight: without sacrifice of strength, occupies 50% less seat space than the ordinary chute.



Model P3-B-24

Embodies all the features of P1-B-24 but does not have the roll on shoulders. It is standard Equipment of U.S. Army and Navy.



Model AN-SS-24

Standard 24 ft. canopy, seat type parachute, as used by the U.S. Army and Navy. Curled hair seat cushion and back pad.

PIONEER PARACHUTE COMPANY, INC.

MANCHESTER, CONNECTICUT, U. S. A.

CABLE ADDRESS: PIPAR, TELEPHONE: Manchester 4157

EFFECTIVE AUGUST 3, 1943

DOWTY EQUIPMENT CORPORATION

BECAME

HUB INDUSTRIES, INC.

THE CHANGE OF NAME is the only change. The organization, policies and management are unchanged. The ownership is wholly American.



The company continues its license to manufacture DOWTY *"Live-Line"* hydraulic pumps and *"Levered-Suspension"* landing gear. The growing list of products not covered by Dowty patents made the change of name desirable.

HUB products now include . . . *"Live-Line"* hydraulic pumps, hand pumps, gear pumps . . . IHC gear gun turret actuating hydraulic pump . . . *"Levered-Suspension"* landing gear . . . Landing gear for Bell P-39 Airacobra . . . Vickers type oleo strut for Australian Beaufort bombers . . . Landing gear for helicopters . . . USAAF experimental track landing gear . . . Landing gear for Fleetwing B-12 . . . Shock struts for Edo . . . Filters . . . experimental aircraft, automotive and industrial projects.

HUB INDUSTRIES, INC.

formerly Dowty Equipment Corporation . . . Long Island City, New York

SPECIALISTS IN HYDRAULIC EQUIPMENT FOR AIRCRAFT AND INDUSTRY

Is there a watchmaker in the audience?



★ To the average person, there's probably nothing startling in the appearance of most aircraft fittings. But, someone who has worked with intricate metal parts—say, a watchmaker—would see unusual things in AFCO Fittings.

He would notice that the threads are as clean and sharp as a hound's tooth, free from the chaser marks which betray hurried production . . . that the noses are smooth as glass, not marred by careless clamping into machines.

Raising an AFCO Fitting to his eye, he would discover inside holes are perfectly reamed, concentric to outside threads by a few thousandths. Perhaps the mirror finish would take his eye, too, for AFCO Fittings are not only exactingly Anodized, but also handled and packed to avoid scratching this protective coating—even to the capping of all "AN" parts with paper thread guards, and separation of layers by special spacers to prevent cutting, nicking and formation of burrs in shipment.

Yes, if there's a watchmaker in the audience, he'll say you are getting fine fittings if yours are AFCO Fittings.

AFCO *Fittings*




NEW "AN" TUBE, PIPE AND HOSE FITTINGS

FITTINGS OF QUALITY FOR PLANES OF WAR AND PEACE

The Aircraft Fitting Company • 1400 East 30th Street • Cleveland, Ohio



A TIRELESS WORKER

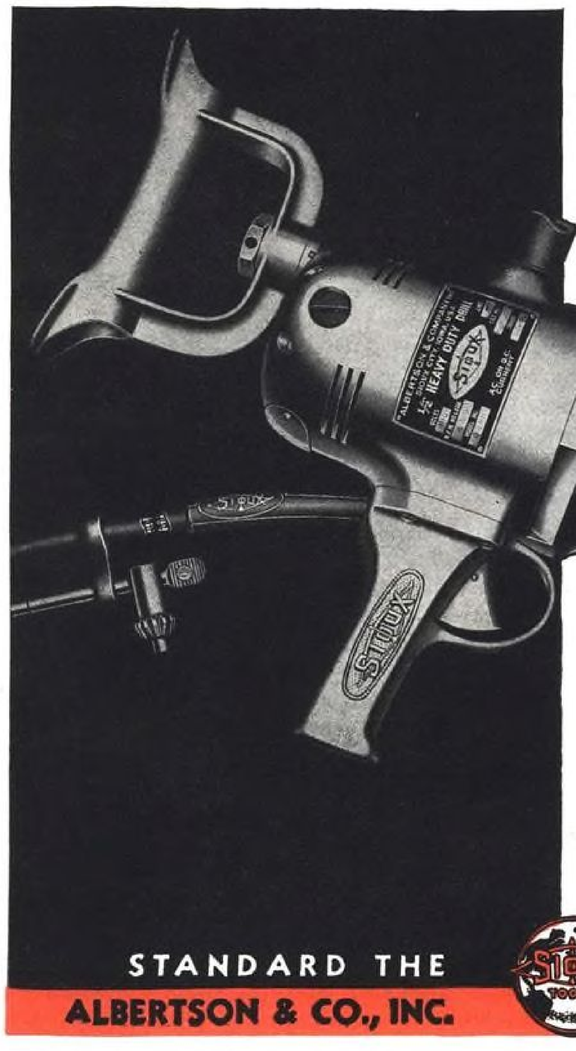

BUILT FOR ROUND THE CLOCK OPERATION

Designed for greater efficiency . . . lighter weight, increased power, improved handling and long punishing service.


A Size for Every Need . . . Heavy Duty 1", ¾", ⅝", ½" (2), ⅜" (2), 5/16", ¼". ¼" Low Speed. Special ¼" All Angle.

Write for Complete Details

SIOUX ELECTRIC DRILLS

STANDARD THE WORLD OVER

ALBERTSON & CO., INC. **SIOUX CITY, IOWA, U. S. A.**

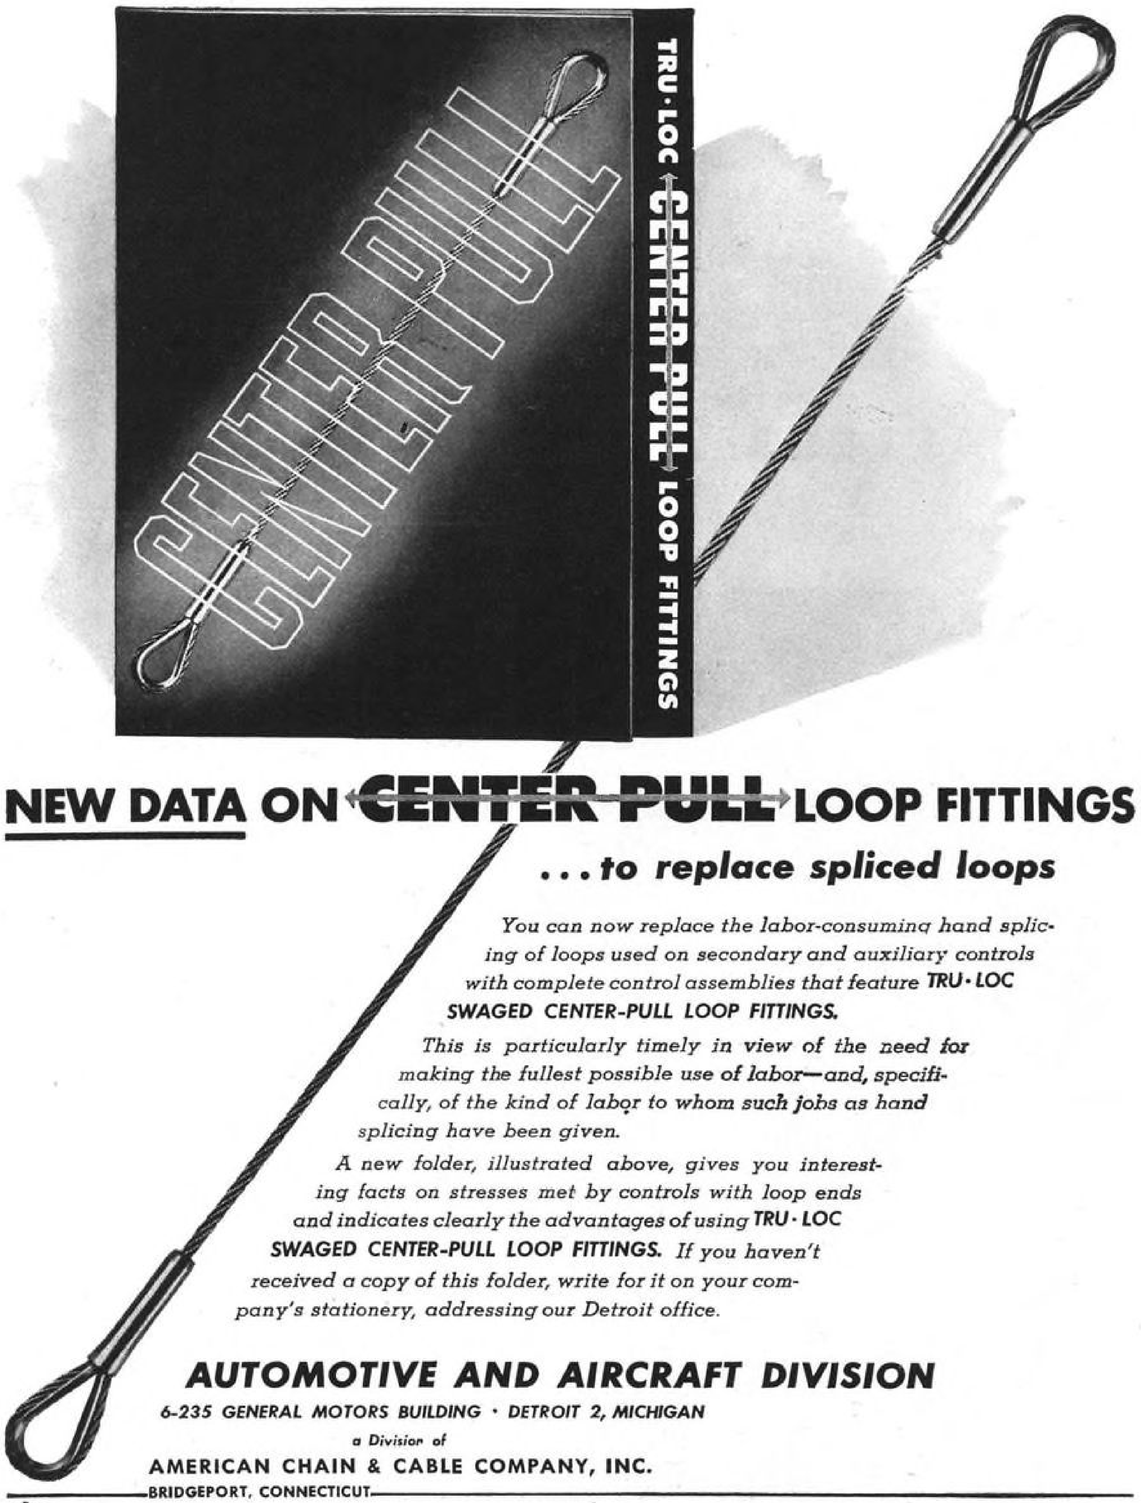

NEW DATA ON CENTER PULL LOOP FITTINGS

...to replace spliced loops

You can now replace the labor-consuming hand splicing of loops used on secondary and auxiliary controls with complete control assemblies that feature **TRU·LOC SWAGED CENTER-PULL LOOP FITTINGS.**

This is particularly timely in view of the need for making the fullest possible use of labor—and, specifically, of the kind of labor to whom such jobs as hand splicing have been given.

A new folder, illustrated above, gives you interesting facts on stresses met by controls with loop ends and indicates clearly the advantages of using **TRU·LOC SWAGED CENTER-PULL LOOP FITTINGS.** *If you haven't received a copy of this folder, write for it on your company's stationery, addressing our Detroit office.*

AUTOMOTIVE AND AIRCRAFT DIVISION

6-235 GENERAL MOTORS BUILDING · DETROIT 2, MICHIGAN

a Division of

AMERICAN CHAIN & CABLE COMPANY, INC.

BRIDGEPORT, CONNECTICUT

ESSENTIAL PRODUCTS . . . TRU-LAY Aircraft, Automotive, and Industrial Controls, TRU-LOC Aircraft Terminals, AMERICAN CABLE Wire Rope, TRU-STOP Brakes, AMERICAN Chain, WEED Tire Chains, ACCO Malleable Castings, CAMPBELL Cutting Machines, FORD Hoists, Trolleys, HAZARD Wire Rope, Yacht Rigging, MANLEY Auto Service Equipment, OWEN Springs, PAGE Fence, Shaped Wire, Welding Wire, READING-PRATT & CADY Valves, READING Electric Steel Castings, WRIGHT Hoists, Cranes, Presses . . . *In Business for Your Safety*



THE *Full* LINE OF

Approved

HOSE CLAMPS



AERO-SEAL Hose Clamps *stand alone* in meeting the new Army and Navy requirements for extra large diametral take-up. Other outstanding features include: ● High strength. ● Uniform peripheral tightening to stand high pressures without leakage. ● Self-locking, no lock wire necessary. ● No loose parts. ● Will not distort or collapse thin wall tubing. ● Can be installed or replaced without removing hose. ● Compact design of take-up housing, with no excessive protrusions. ★ *Exhaustive tests have proved the unquestioned superiority of AERO-SEAL Hose Clamps for all types of aircraft service.*



NOW! SMALL SIZES

Newest additions to the AERO-SEAL line include clamps for 1/4", 3/8", 1/2", 5/8", and 3/4" I.D. hose. Tighten an AERO-SEAL clamp on your finger or forearm and see how uniform the pressure is!

Specially good for

SELF-SEALING HOSE

This illustration shows one size of AERO-SEAL Hose Clamp applied to two different sizes of self-sealing hose. The clamp is the same size in each case and the hoses are 5/8" and 1" I.D. The extra-long take-up of AERO-SEAL Hose Clamps makes them particularly well adapted for dependable service on the soft, thick walls of self-sealing hose. On periodic inspection, a quick twist of the thumbscrew is all that is needed to insure maintenance of a leak-proof joint.


WIDE CLAMPING RANGE

AERO-SEAL Hose Clamps have *more than double* the diametral take-up required to cover variations in hose diameter, wall thickness, and the flow of rubber under repeated tightening of clamps in service. This extra take-up gives a wide clamping range . . . each size of clamp will fit several smaller hose sizes, in addition to the nominal size for which each is made. AERO-SEAL construction consists of a band perforated with holes corresponding to worm gear teeth, this band being drawn through a housing by turning a thumb-screw worm. Enough extra perforations are provided so that the clamp can be taken up *a full inch on diameter.* This will help to solve those service problems that arise when exactly the right size clamp is not in stock.

WRITE FOR NEW CIRCULAR....

Aircraft Standard Parts Co.

1715 Nineteenth Avenue, Rockford, Illinois

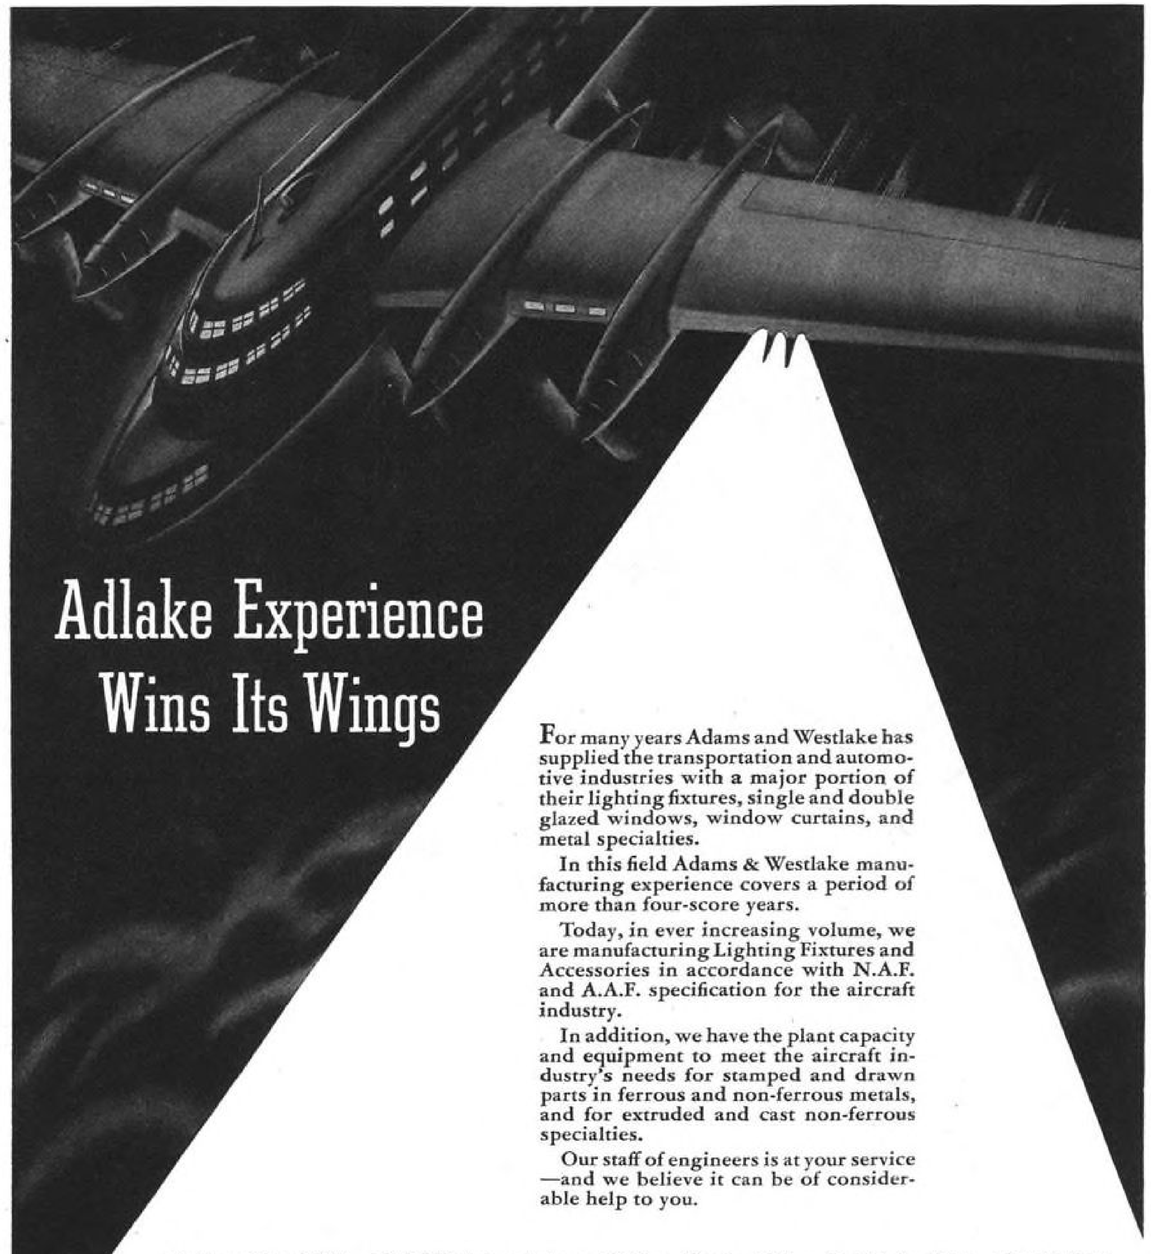

Adlake Experience Wins Its Wings

For many years Adams and Westlake has supplied the transportation and automotive industries with a major portion of their lighting fixtures, single and double glazed windows, window curtains, and metal specialties.

In this field Adams & Westlake manufacturing experience covers a period of more than four-score years.

Today, in ever increasing volume, we are manufacturing Lighting Fixtures and Accessories in accordance with N.A.F. and A.A.F. specification for the aircraft industry.

In addition, we have the plant capacity and equipment to meet the aircraft industry's needs for stamped and drawn parts in ferrous and non-ferrous metals, and for extruded and cast non-ferrous specialties.

Our staff of engineers is at your service —and we believe it can be of considerable help to you.

• Instrument Board Lights • Light Indicators • Instrument Lights • Running Lights • Identification Lights • Portable Lights (Direct and Indirect)
• Anchor and Identification Lights • Electric Receptacles • Sealed Beam Adapters • Ash Receptacles
• Landing Lights and Lamps • Windows and Curtains • Windshields and Canopies

Adlake TRADE MARK

THE ADAMS & WESTLAKE COMPANY

ESTABLISHED IN 1857 — ELKHART, INDIANA — NEW YORK · CHICAGO

MANUFACTURERS OF ADLAKE SPECIALTIES AND EQUIPMENT FOR RAILWAY, AIRWAY, HIGHWAY, AND WATERWAY

DE WALT

METAL CUTTING MACHINE

for cutting tubes, bars, formed and extruded shapes



This flexible DeWalt Metal Cutting Machine is designed for all types of straight and angle cut-off operations in both ferrous and non-ferrous metals.

Write for descriptive literature.

DE WALT
PRODUCTS CORPORATION
LANCASTER, PA.


CURTISS-WRIGHT TECHNICAL INSTITUTE STUDENTS

Where Do They COME FROM!

Everywhere

From east to west and north to south in our own country; from Alaska, Hawaii, Cuba, Puerto Rico, Canada, China, India, Turkey, Central America, South America and other friendly allied countries; ambitious young men come to CURTISS-WRIGHT TECHNICAL INSTITUTE.

These air-minded civilian students; college men, high school graduates, men from cities, men from farms, men from all walks of life; enroll at this most distinguished school of aeronautics for one purpose . . . . to prepare themselves for greater contribution to our war effort and at the same time for a lifetime career in after-the-war aviation.



This enrollment from world-wide sources is significant. CURTISS-WRIGHT TECHNICAL INSTITUTE, one of the oldest and most progressive aeronautical schools, located in the heart of Southern California's giant aircraft industry, is recognized the world over as an institution offering the highest type of Specialized Aviation Mechanical and Aeronautical Engineering Training available.

Since the founding of this Institute in 1929 its object has been to prepare young men to advance in Aviation, to the highest position of responsibility and make money for them. Today, this training still being available to civilians, is doubly valuable because it not only prepares them for a lifetime career but for service in the Air Forces as well.

This specialized modern up-to-the-minute training has been proven by the success of thousands of CURTISS-WRIGHT TECHNICAL INSTITUTE graduates in all phases of aviation activity, both civil and military. All with exceptional value to the war effort.

The high standing of CURTISS-WRIGHT TECHNICAL INSTITUTE is indicated by Mr. Donald Douglas, President of the great Douglas Aircraft Company, in choosing this school for his own son's training. In addition, this school was selected to train Army Air Force mechanics by our government in 1939, long before the war.

CURTISS-WRIGHT TECHNICAL INSTITUTE knows how to train men successfully. What it has done for its thousands of graduates it can do for you. But you must ACT NOW. Don't delay. . . . Send coupon TODAY.

Offering specialized and proven training in Aeronautical Engineering and Master Aviation Mechanics

NO FLYING INVOLVED

THIS TOWER OVERLOOKS AVIATION'S MOST DISTINGUISHED SCHOOL OF AERONAUTICS

CURTISS WRIGHT TECHNICAL INSTITUTE

GRAND CENTRAL AIR TERMINAL, 1226 AIRWAY, GLENDALE (LOS ANGELES) CALIF.
UNDER PERSONAL SUPERVISION OF MAJOR C. C. MOSELEY, OWNER, SINCE ITS ESTABLISHMENT IN 1929

Contractor to the U. S. Army Air Corps

BE WISE—PROTECT YOUR FUTURE

MAIL TODAY • DON'T DELAY

WITHOUT COST OR OBLIGATION SEND ME FULL INFORMATION AND CATALOG ON THE COURSE CHECKED BELOW

- ☐ AERONAUTICAL ENGINEERING COURSE
- ☐ MASTER AVIATION MECHANIC COURSE
- ☐ SPECIALIZED ENGINE COURSE
- ☐ SPECIALIZED AIRPLANE COURSE
- ☐ POST GRADUATE AERONAUTICAL ENGINEERING COURSE
- ☐ SPECIALIZED AIRCRAFT SHEET METAL COURSE
- ☐ AERONAUTICAL DRAFTING COURSE, HOME STUDY
- ☐ AIRCRAFT BLUE PRINT READING COURSE, HOME STUDY


DATE OF BIRTH

NAME

ADDRESS

CITY STATE AV-11

JOIN THE U. S. AIR FORCES

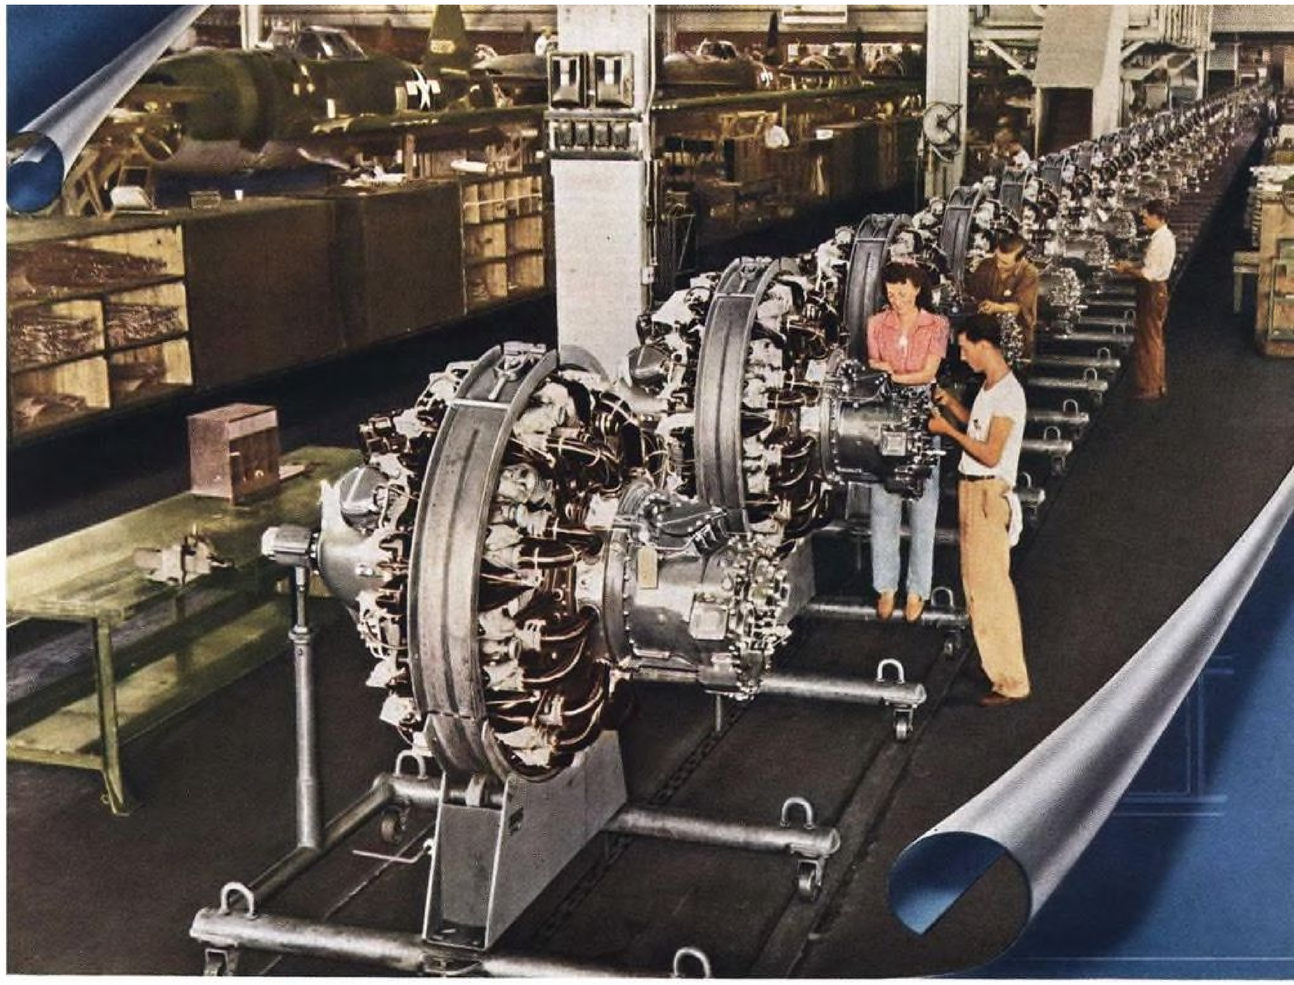

cradle FOR THE HEART OF A THUNDERBOLT

A BLUEPRINT COMES TO LIFE

to help speed plane production

Whiting Collateral Engineering Service engineers, with their background and experience in materials handling, collaborate with engineers of the aviation industry in the development of specialized equipment. From this collaboration comes the blueprint of a solution . . . inventions . . . developments . . . refinements . . . and a new and better tool is produced. Typical result of Whiting Service is this long line of engine stands facilitating production in a Republic Aviation Corporation plant.

Whiting's Collateral Engineering Service works in cooperation with both operator and manufacturer in solving the various problems of aircraft handling, loading, and maintenance.

ARMY E NAVY

WHITING CORPORATION

Main Office and Plant: 15623 Lathrop Ave., Harvey, Ill.
Western Office: 1151 S. Broadway, Los Angeles 15, Calif. Canadian Subsidiary: Whiting Corporation (Canada) Ltd., Toronto, Ontario
Branch Offices in New York, Chicago, Buffalo, Birmingham, Pittsburgh, Detroit, Cincinnati, St. Louis, and Washington, D. C.

• AVIATION DIVISION •




What is a Gee-whiz-o-stat?

We wouldn't know either!


But General Instrument and their engineers are specialists in reducing these 64 dollar questions to practical production.

There are innumerable "gee-whiz-o-stats"—thingamabobs, ideas now being hatched, nameless today but destined for future fame and profit . . . new products for an era of peace time efficiency.

Perhaps you have such an idea . . . just a doodler's sketch on the back of an envelope. Don't throw it away—or file it. Bring it to General Instrument NOW. If it is based on sound principles, our engineers will design it, shape it to precision performance, ready it now for the starting gun of mass-production and post-war distribution.





It's better than a 2 to 1 chance that your home or auto radio owes its performance and better reception to G. I. precision equipment.



General Instrument CORPORATION

EXECUTIVE OFFICES • 829 NEWARK AVENUE • ELIZABETH, N. J.

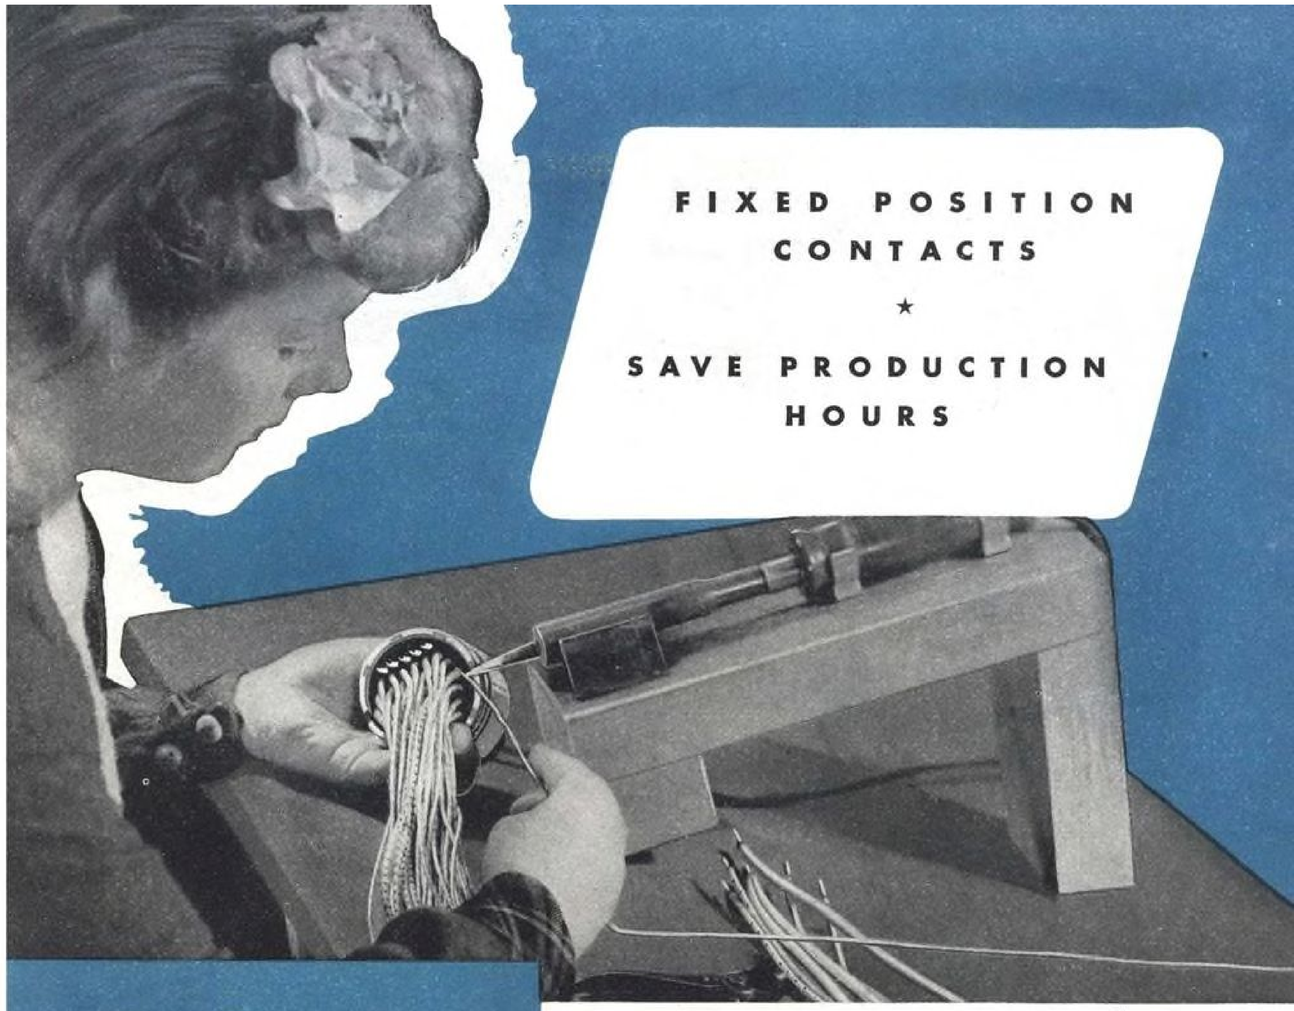

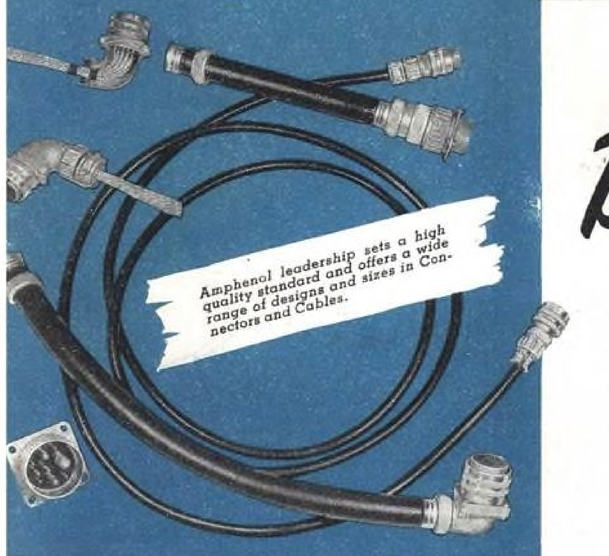

AMPHENOL


Better Quality... More Speed


Solder faster and accomplish better connections with Amphenol connectors. No rearranging . . . no twisting . . . no turning. Strong, permanent, perfectly soldered connections in record time! Amphenol Fixed Position Contacts make it easy to insert wire into the pre-tinned solder cups. Oversize cups on size 20 contacts assure rapid fine wire installations.

Quality an all important factor—*speed* that increases production remarkably on your assembly line. Use Amphenol Connectors to guarantee satisfactory operation and assured dependability.

AMERICAN PHENOLIC CORPORATION • CHICAGO
IN CANADA—AMPHENOL LIMITED • TORONTO

A request on your letterhead will bring cataloged data on Connectors, Cables, and Dielectric Plastics

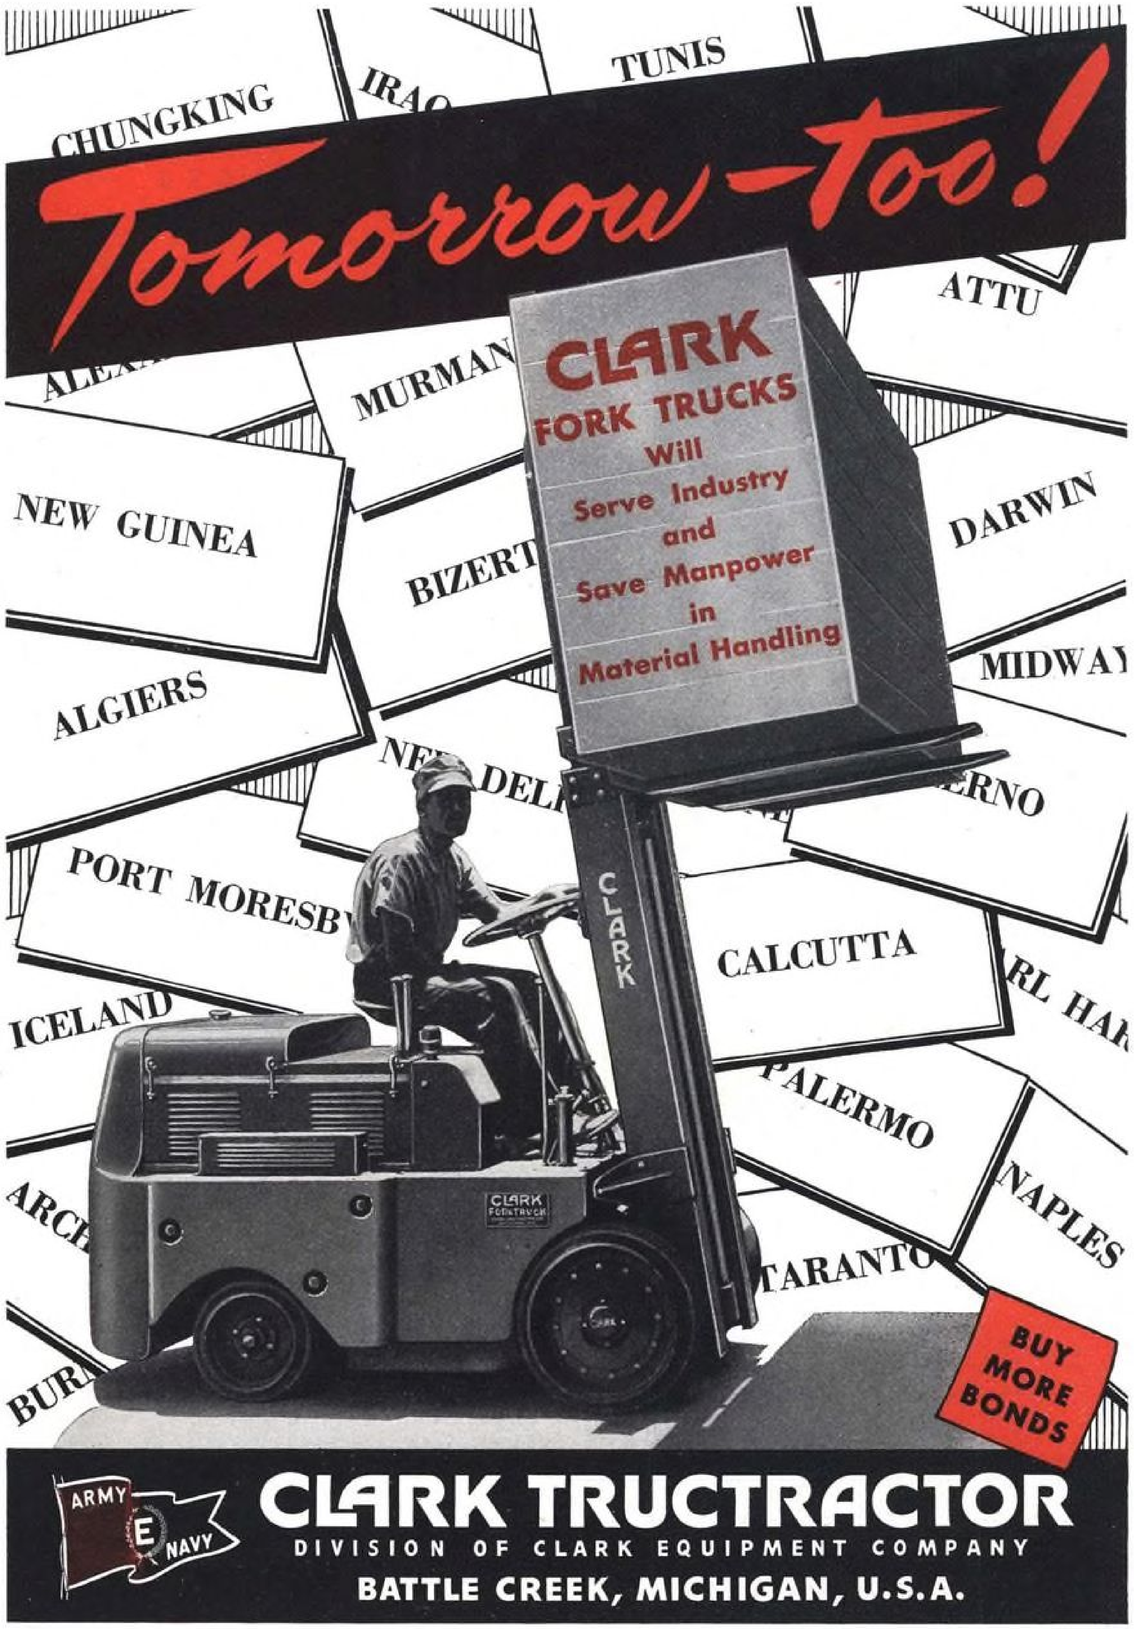

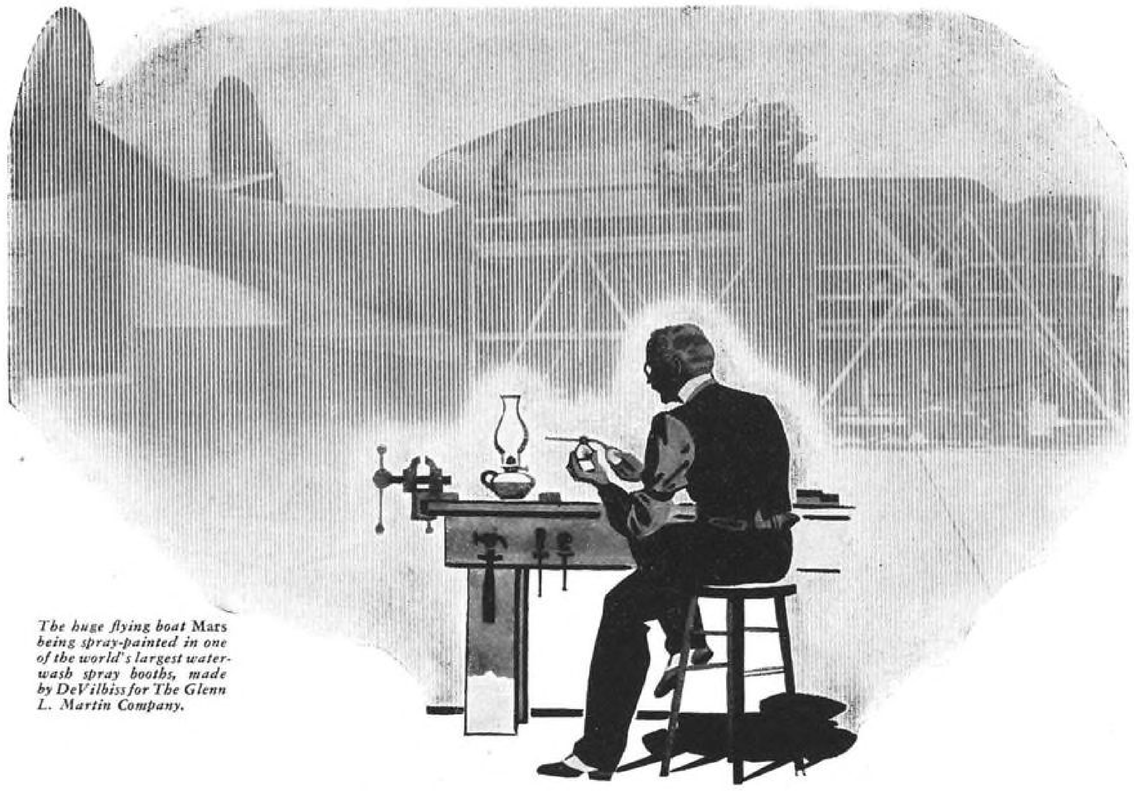

The huge flying boat Mars *being spray-painted in one of the world's largest water-wash spray booths, made by DeVilbiss for The Glenn L. Martin Company.*

Dr. DeVilbiss never dreamed he would help deliver a 140,000-pound war baby

When Dr. DeVilbiss burned the midnight oil back in 1888 to invent the DeVilbiss Atomizer, he never dreamed that his instrument would help deliver an immense 70-ton *flying* ocean transport.

But thanks to 55 years of DeVilbiss air research that's what two descendants of the DeVilbiss Atomizer—the fast-action DeVilbiss Paint Spray Equipment and one of the world's largest Water-Wash Spray Booths—are doing for The Mars at the Glenn L. Martin plant.

Today, there's a long line of modern DeVilbiss air-operated and air-handling equipment that is performing many essential war duties throughout the Aviation Industry. It is saving precious minutes and critical manpower in painting aircraft armour, doping wings, camouflaging, applying identifying symbols, cementing fabric parts, caulking seams, coating engine cylinders, cleaning engine parts, striping hangar floors and compressing air for field service trucks.

Are you taking full advantage of DeVilbiss' long, specialized air experience to speed up and improve your operations? It can help you in your effort for Victory—and when that day comes, it will put you in a more favorable position to forge ahead in the post-war era.

THE DEVILBISS COMPANY · TOLEDO, OHIO
Canadian Plant: Windsor, Ontario


★ ★ ★

ARMY E NAVY

PROUD to have won the coveted Army-Navy "E" for excellence in war production, the men and women of DeVilbiss pledge to continue giving their all-out best—for Victory.

DEVILBISS SPRAY SYSTEMS


SPRAY EQUIPMENT · EXHAUST SYSTEMS · AIR COMPRESSORS · HOSE AND CONNECTIONS

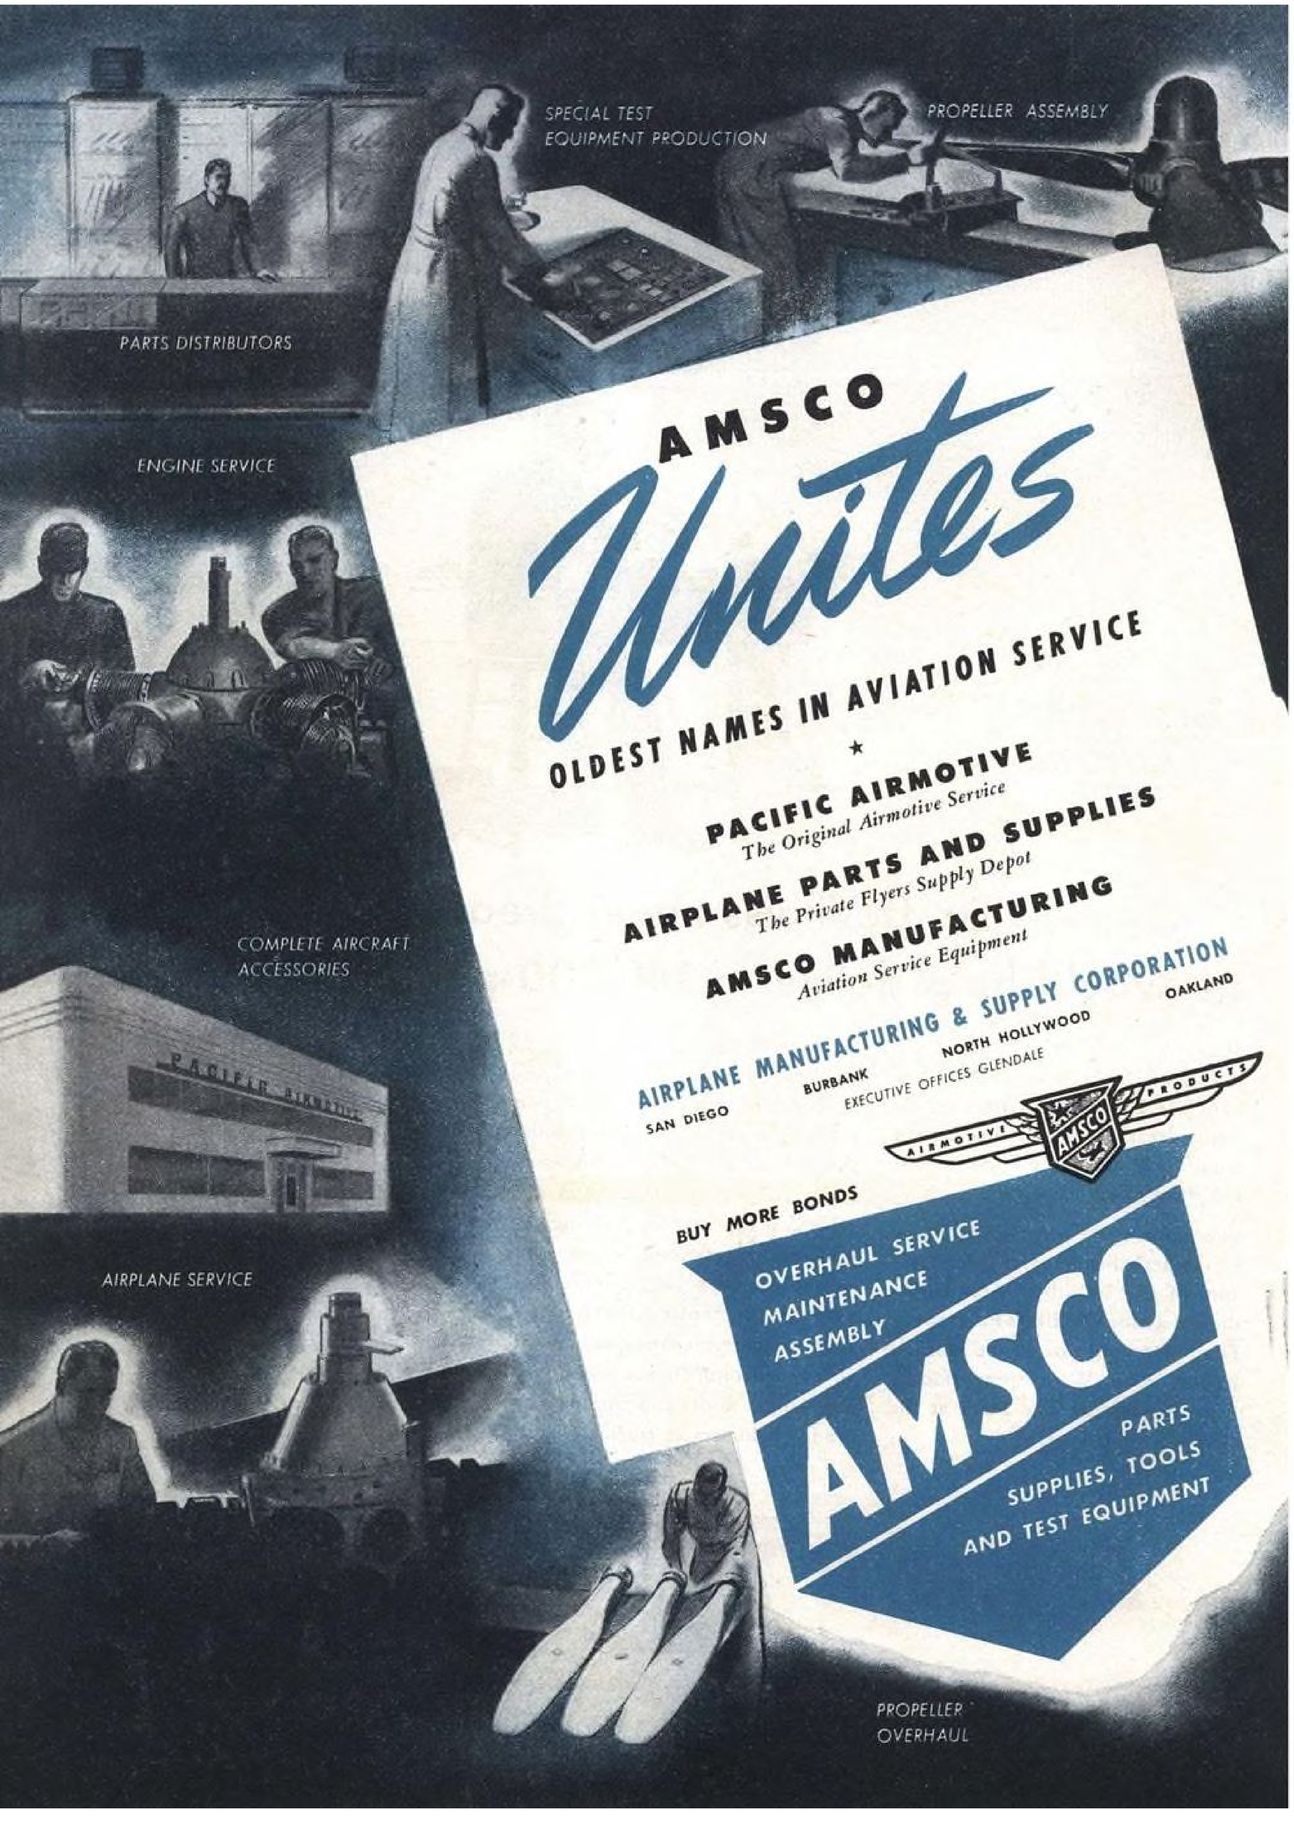
SPECIAL TEST EQUIPMENT PRODUCTION
PROPELLER ASSEMBLY
PARTS DISTRIBUTORS
ENGINE SERVICE
COMPLETE AIRCRAFT ACCESSORIES
AIRPLANE SERVICE
PROPELLER OVERHAUL
AMSCO
Unites
OLDEST NAMES IN AVIATION SERVICE
★
PACIFIC AIRMOTIVE
The Original Airmotive Service
AIRPLANE PARTS AND SUPPLIES
The Private Flyers Supply Depot
AMSCO MANUFACTURING
Aviation Service Equipment
AIRPLANE MANUFACTURING & SUPPLY CORPORATION
SAN DIEGO
BURBANK
NORTH HOLLYWOOD
EXECUTIVE OFFICES GLENDALE
OAKLAND
AIRMOTIVE AMSCO PRODUCTS
BUY MORE BONDS
OVERHAUL SERVICE
MAINTENANCE
ASSEMBLY
AMSCO
PARTS
SUPPLIES, TOOLS
AND TEST EQUIPMENT


Majored by
PACIFIC AIRMOTIVE
MEANS MORE THAN EVER BEFORE
Experience – Airproven since 1927, our service stands the test of flight –
Experience – Helping United Nations to Win the war –
Experience – Building the finest shops for tomorrow's Great Air Age –
PACIFIC AIRMOTIVE
BURBANK AND OAKLAND, CALIF.
A DIVISION OF AIRPLANE MANUFACTURING AND SUPPLY CORPORATION
PAC
Aeronautical maintenance, parts and supplies... distributors for outstanding accessory, engine and propeller manufacturers, replacement parts and service.
1927 Lindberg's Flight—Pacific Airmotive's start.
1943 No design too advanced for the know-how at Pacific Airmotive.
★
BUY MORE BONDS

Do You Want to Know More About Working Stainless Steel?

. . . How to
MACHINE
SOLDER
ROLL
SHEAR
BLANK
DRAW
SPIN
PRESS OR BRAKE FORM
FORGE
SILVER BRAZE
ANNEAL
PICKLE
RIVET
GRIND
POLISH
BUFF
AND ETCH IT
. . . and How to
PROTECT IT
During Fabrication
and CLEAN IT
After Fabrication

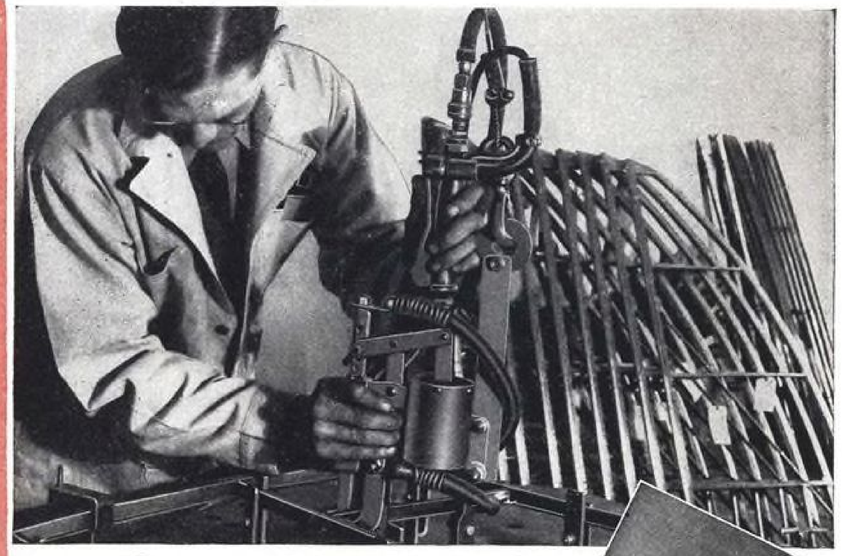

. . . then send for this book ➡



It covers every subject listed at the left—thoroughly! It tells what to do—and what not to do. It has helped thousands of fabricators—and it can help you.

In it you will find tables showing approximate blank diameters for cylindrical shells, speeds for machining, annealing temperatures, pickling treatments, physical and mechanical properties of ferrous and non-ferrous metals, hardness conversion figures and sheet metal gauges. Recommended forging temperatures are given. The various steps in grinding, polishing and buffing are outlined.

You'll find all this and much more of interest in this highly useful book prepared from more than twenty years of experience with stainless steels. Write TODAY for your copy.

REPUBLIC STEEL CORPORATION
Alloy Steel Division, Dept. AV
Sales Offices • Massillon, Ohio
GENERAL OFFICES • CLEVELAND 1, OHIO
Berger Manufacturing Division • Culvert Division
Niles Steel Products Division • Steel and Tubes Division
Union Drawn Steel Division • Truscon Steel Company
Export Department: Chrysler Bldg., New York 17, N.Y.

REPUBLIC *Enduro* STAINLESS STEEL

Reg. U. S. Pat. Off.

Other Republic products include Carbon, Alloy and "Aircraft Quality" Steels — Pipe, Sheets, Bolts and Nuts, Tubing



ARE PARTS A PROBLEM?

Consider BRAKE SHOE *as a Source*



Parts for Trains



Equipment for Garages



Parts for Excavating



Parts for Oil Drilling




Parts for Planes

Parts in metals, metal alloys and composition.

Parts that are cast, upset, drop forged and molded.



Parts for Cars, Trucks



Industrial Pumps



Parts for Heat Treating




Parts for Ships



Parts for Crushers

Whether your "punished part" problem requires one casting or thousands of steel forgings, BRAKE SHOE is equipped to serve you.

ENLIST your dollars for Victory — Buy more WAR BONDS today.




Parts for Machinery



Parts for Shells



Parts for Manufacturers



Products for Welding

AMERICAN BRAKE SHOE COMPANY, 230 PARK AVE., NEW YORK 17, N. Y.


AMERICAN Brake Shoe COMPANY

58 PLANTS SERVING INDUSTRY AND TRANSPORTATION

American Brakeblok Division	Detroit, Mich.
Ramapo Ajax Division	New York, N. Y.
American Manganese Steel Division	Chicago Heights, Ill.
Brake Shoe & Castings Division	New York, N. Y.
Kellogg Division	Rochester, N. Y.
American Forge Division	Chicago, Ill.
Southern Wheel Division	New York, N. Y.
National Bearing Metals Corp.	St. Louis, Mo.



Parts for Landing Gears



Parts for Aircraft Engines



Parts for Tanks



HEINEMANN

AERO-MAGNETTE

CIRCUIT BREAKERS

It's up to us on the production front to see that those on the fighting front return safely to their home bases to fly again on other missions. This unit is the only fully magnetic aircraft circuit breaker and provides one positive source of protection for motor, radio, lighting and control circuits — any one of which is vital to successful operations.

It is small; 2-5/16" high (exclusive of handle and terminals), 2-3/4" long, .865" wide . . . It is light in weight; 4-1/2 oz. . . . It operates in temperatures from −60° to +200° F . . . It is vibration proof and shock resistant . . . It opens instantly on short circuits but delayed trip permits harmless overloads. Specify and install Heinemann Aero-Magnette Circuit Breakers.

HEINEMANN CIRCUIT BREAKER CO.

Subsidiary to Heinemann Electric Co.

TRENTON NEW JERSEY

Will the Helicopter be our most versatile war-bird?



RECENT news releases divulged that the United States Army had placed the world's first large-scale order for helicopters —that an additional swarm had been ordered for use in anti-submarine warfare.

This revolutionary rookie flies forward, backward, sideways, straight up, straight down—hovers at any height. It can drop a ton of depth-charges or bombs, spot artillery targets, lay miles of signal corps wire in minutes. It can deliver breakable supplies and ammunition—even to troops in dense forest — can communicate by telephone (as Mr. Sikorsky is doing in the accompanying illustration), land messengers and haul up wounded men.

Muffled to relative quiet, it can perform night missions behind enemy lines. On pontoons it can take off from a freighter's deck for liaison and observation duty—can land on water, swamp, snow, or back on deck.

The modern helicopter's wartime uses are countless, as are the improvements in design and construction through which it has been developed toward perfection. Prominent among them are the many applications of seamless steel tubing.

In rotor standards, fuselage frames, engine mountings, landing gears and pontoon braces, the helicopter relies on the same steel tubing that has proved its mettle in so many of our modern fighters and bombers. For rigidity, high strength-weight ratio and rugged durability — proved in combat service — plane manufacturers have put the seal of their approval on SHELBY Seamless Aircraft Tubing.

Keep fully informed on aircraft tubing. Write for your copy of Bulletin No. 16.


SHELBY SEAMLESS AIRCRAFT TUBING is available in all standard sizes and sections, made to exacting government specifications by the most modern process, developed in the plants of the world's largest manufacturer of tubular products.

NATIONAL TUBE COMPANY

PITTSBURGH, PA.

Columbia Steel Company, San Francisco, *Pacific Coast Distributors* United States Steel Export Company, New York

UNITED STATES STEEL

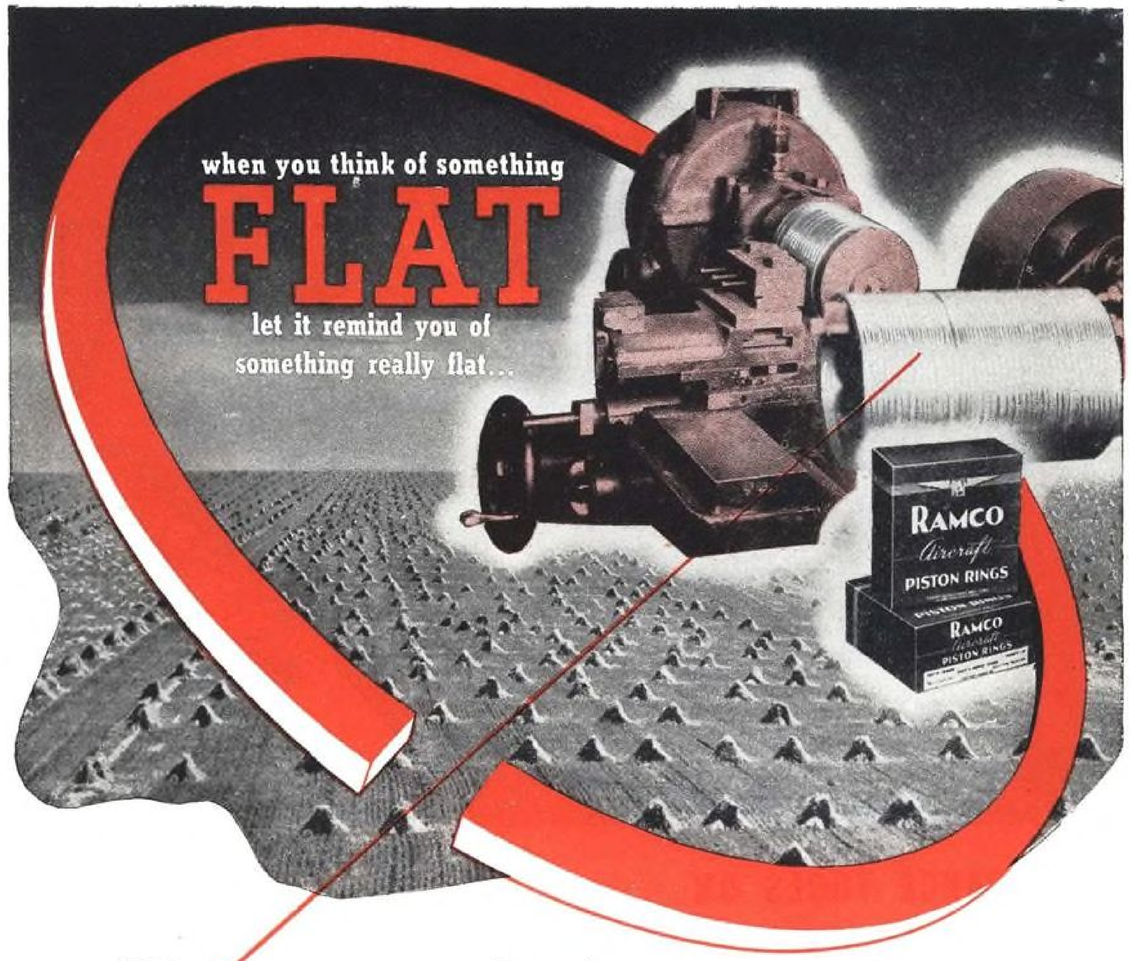

RAMCO MICRO LAP

AIRCRAFT PISTON RINGS

For military aviation today—for global air transport tomorrow—Ramco is ready with aircraft piston rings of the required precision finish . . . measurements specified in millionths of an inch! Along with this finish, a high degree of flatness and parallelism is produced. The ring's width is the same at every point of its circumference.

To the production of such rings—at high speed without sacrificing the finest precision standards —Ramco is devoting an entire new plant, utilizing the latest in machines and methods.


Foremost among the improved methods employed is Ramco Micro-Lap—a highly advanced technique for faster lapping of the rings to extreme tolerances.

Ramco's facilities, not only for producing aircraft piston rings, but also automotive and industrial piston rings, are available wherever they can be employed to further the war effort. Your request for a free booklet, brings you the complete story.


Address all correspondence to General Offices, Ramsey Accessories Mfg. Corp., 3706 Forest Park Blvd., (8) St. Louis, Mo. U.S.A.

FOR VICTORY BUY WAR BONDS

Copyright, 1943, Ramco

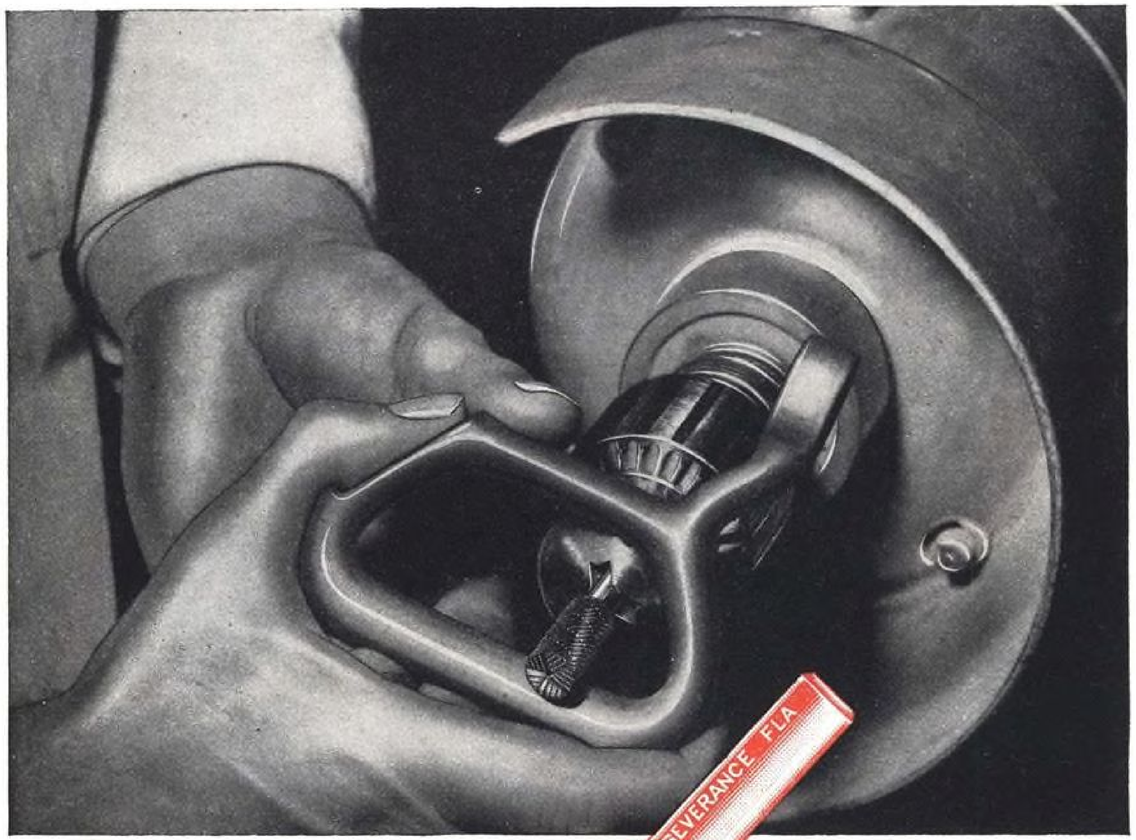

SEVERANCE TOOLS ON STATIONARY SET-UP SPEED FINISHING OF SMALL PARTS

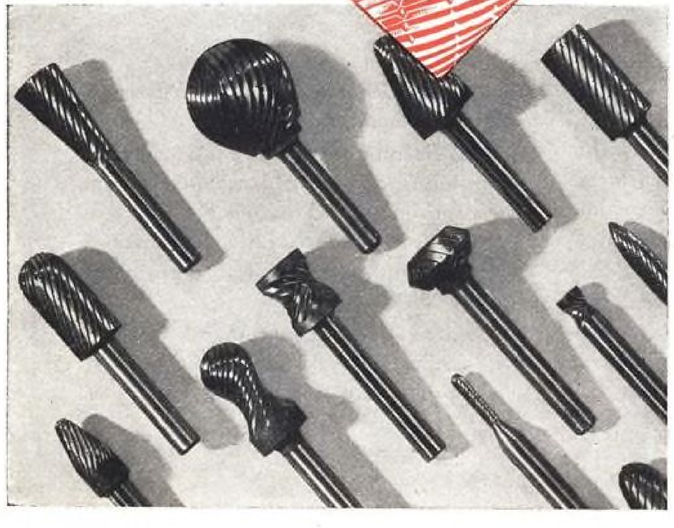

Above you see a Severance Midget Milling Cutter being used in a stationary set-up which many manufacturers of small parts have found to be a great time saver. The part is held in the hand, the tool is held in a chuck on almost any type of bench lathe, polishing unit or flexible shaft mounted in a vise.

No matter how they are used, Severance Midget Milling Cutters do the job of finishing faster and cleaner than any other type of rotary tool. They take deep, sharp bites and can be successfully reground scores of times.

In addition to high speed cutters, Severance "Carbide" Midget Milling Cutters are also now available in a wide range of shapes and sizes. Carbide cutters are recommended for metals or other materials having an extremely hard, abrasive, scale. Write for complete facts about how Severance Midget Milling Cutters can help you speed up your cleaning and finishing operations.

Severance

SEVERANCE TOOL INDUSTRIES, INC., SAGINAW, MICHIGAN. PLANTS IN LONG ISLAND CITY, NEW YORK; DETROIT, MICHIGAN; FORT WAYNE, INDIANA; CHICAGO, ILLINOIS; LOS ANGELES, CALIFORNIA.

S*porty says:

see ADEL *for quick service*

● Plants in Burbank, California, and Huntington, West Virginia, will give you *immediate deliveries* of ADEL line support clips and blocks. They're the *standard* of the industry because ADEL pioneered in this field, designed, refined, simplified and improved . . . not for months but for *years*. Tested on every battle front, used by every major U. S. and Canadian aircraft company. Over 150 million now in service. 12,000 production types and sizes for all aircraft to save you money in simplicity of installation, long life, ease of maintenance, low cost upkeep.


Ask our nearest engineering service office for free catalog with authoritative information about the correct support for electric conduits, fuel, oil, instrument, and hydraulic lines. And if you hear claims that other line supports are "just as good" as ADEL'S, please bear in mind that it is always a safe bet to use what others *try* to imitate.

ADEL

PRECISION PRODUCTS CORP.

Burbank, California
Huntington, W. Va.


*S*PORTY SAYS:*
SUPPORT OUR BOYS
...BUY MORE BONDS

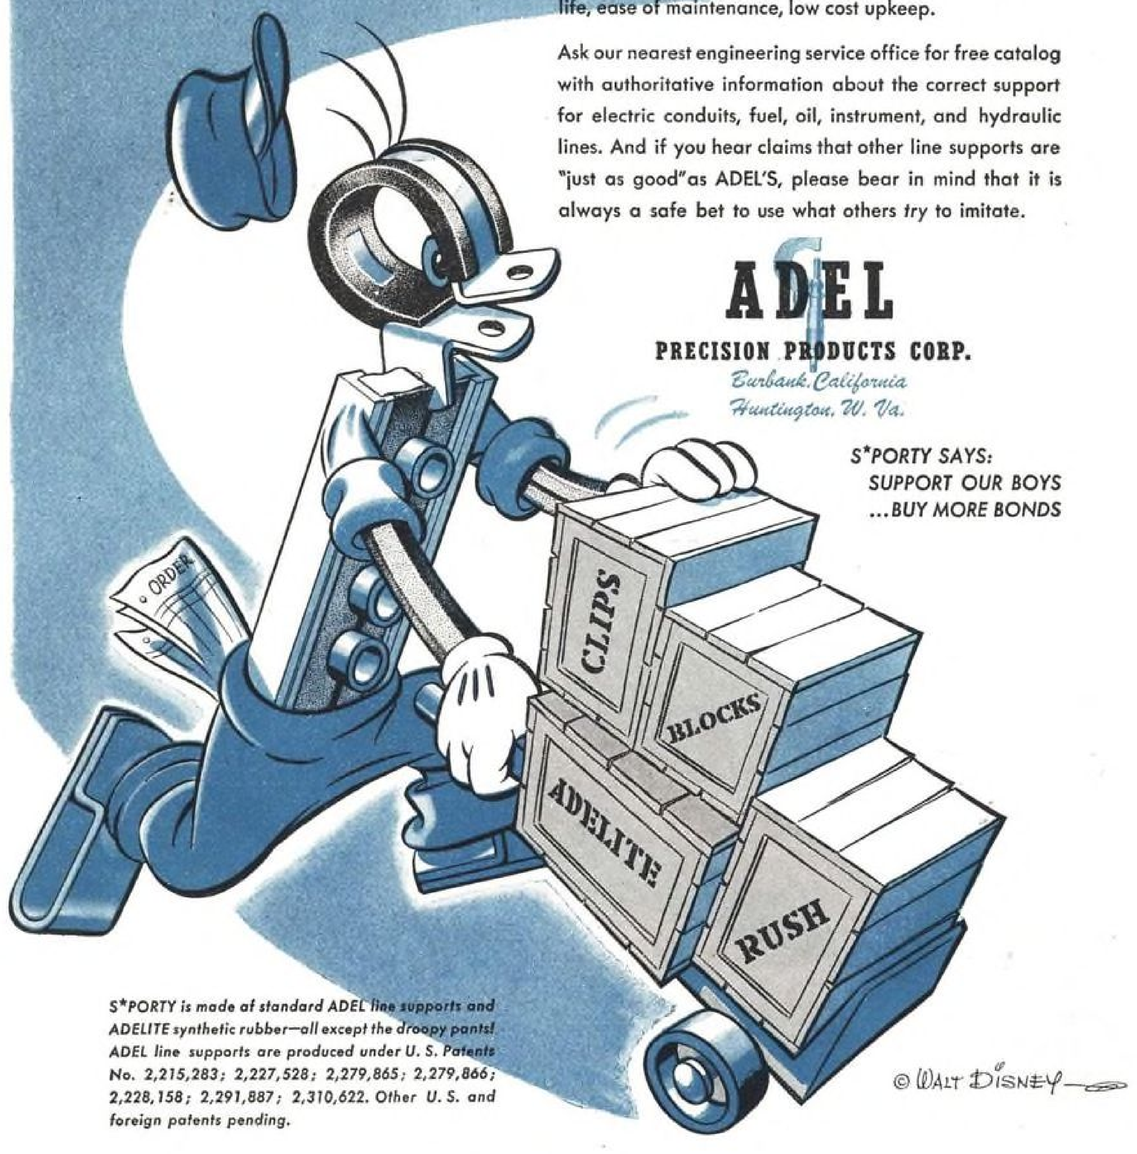

*S*PORTY is made of standard ADEL line supports and ADELITE synthetic rubber—all except the droopy pants! ADEL line supports are produced under U. S. Patents No. 2,215,283; 2,227,528; 2,279,865; 2,279,866; 2,228,158; 2,291,887; 2,310,622. Other U. S. and foreign patents pending.*

10777 Van Owen Street, BURBANK, CALIF. • 1411 Fourth Avenue, SEATTLE 1, WASH. • Admin. Bldg., Love Field, DALLAS 9, TEXAS • 6560 Cass Avenue, DETROIT 2, MICH. 421 Mutual Home Building, DAYTON, OHIO • 1444 Washington, HUNTINGTON, W. VA. • 303 Wareham Building, HAGERSTOWN, MD. • 302 Bay Street, TORONTO, ONTARIO

Copyright 1943, Adel Precision Products Corp.

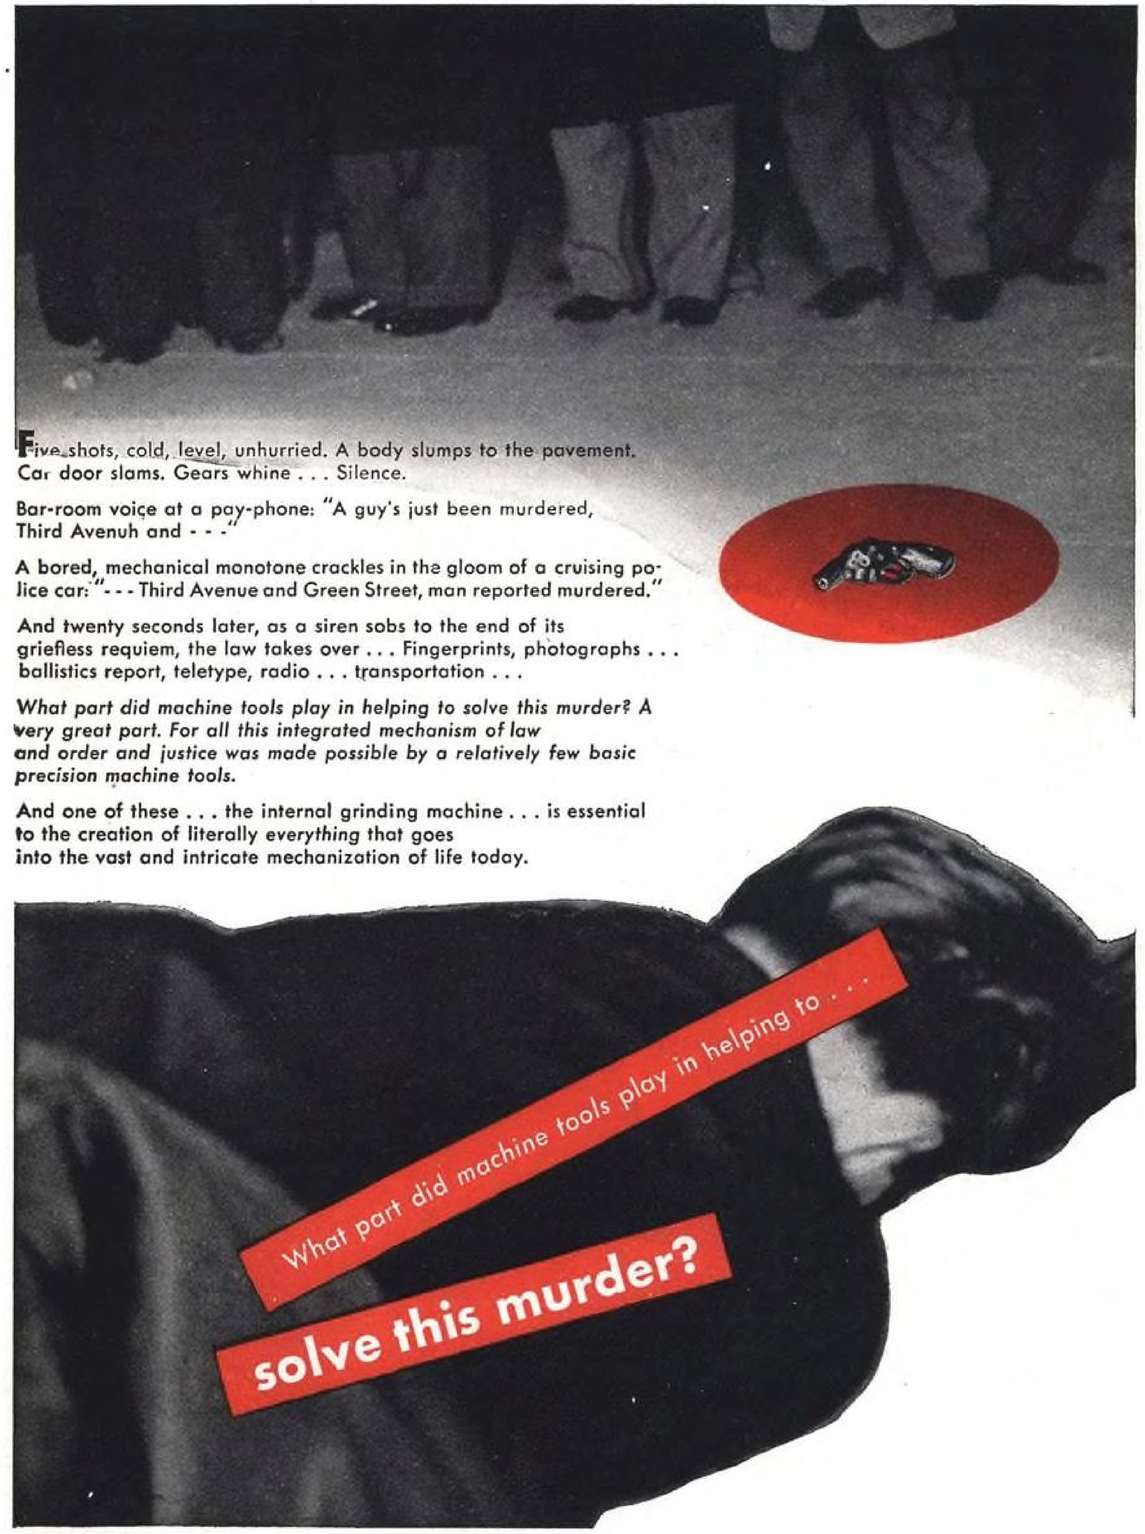

Five shots, cold, level, unhurried. A body slumps to the pavement. Car door slams. Gears whine . . . Silence.

Bar-room voice at a pay-phone: "A guy's just been murdered, Third Avenuh and - - -"

A bored, mechanical monotone crackles in the gloom of a cruising police car: "- - - Third Avenue and Green Street, man reported murdered."


And twenty seconds later, as a siren sobs to the end of its griefless requiem, the law takes over . . . Fingerprints, photographs . . . ballistics report, teletype, radio . . . transportation . . .

What part did machine tools play in helping to solve this murder? A very great part. For all this integrated mechanism of law and order and justice was made possible by a relatively few basic precision machine tools.

And one of these . . . the internal grinding machine . . . is essential to the creation of literally *everything* that goes into the vast and intricate mechanization of life today.

BRYANT CHUCKING GRINDER CO. SPRINGFIELD VERMONT, U.S.A.

Is this a "BAD" scratch?

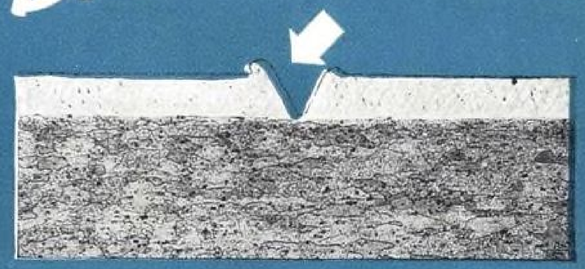

Scratch in alclad coating, magnified 100 times. Observers agree that scratches seldom penetrate to this depth.

" ---- In case of Alclad Aluminum Sheet, this material will not be rejected for scratches that do not extend through to the base metal."

Plane production was accelerated when Government Specification Agencies announced the above decision on what constitutes a "safe" or "unsafe" scratch in alclad aluminum sheet. Contractors were given a usable standard of quality. Though made some time ago, it is repeated here for the benefit of any workers in aluminum who may not be familiar with the ruling.

Data on which this decision was based have since been supplemented by considerable new data. All confirm and strengthen the original findings. Typical results of the newer tests are shown in the table at the right.

Even the deep scratch, penetrating to the base metal, had no effect upon tensile and yield strengths, and only a negligible effect upon the elongation and fatigue strength.

It was again concluded, therefore, that scratches which do not penetrate through the alclad coating and into the core are not cause for rejection.

EFFECTS OF SCRATCHES ON TENSILE PROPERTIES*

Average Coating Thickness, In.	Average Depth of Scratch, In.	Average Depth of Scratch, Percent of Coating Thickness	Tensile Strength, Psi.	Yield Strength (Offset Equals 0.2 Percent), Psi.	Elongation in 2 In., Percent
0.0026	0	0	62 105	41 200	20.3
0.0025	0.00150	60	62 810	42 000	19.0
0.0028	0.00288	103	62 730	41 850	16.0

*All stresses computed on basis of full thickness of sheet.

Reprints of the paper, "Effect of Scratches on Fatigue Strength of Alclad Sheet", discussing these findings in detail, are available. For a copy, write ALUMINUM COMPANY OF AMERICA, 2182 Gulf Building, Pittsburgh, Pennsylvania.

ALCOA ALUMINUM

To meet EXTREMES



"Stromberg" Carburetion

COMPENSATES INSTANTLY AND AUTOMATICALLY

Whether it's a swift rise upstairs from blistering-equatorial heat to sub-zero cold, a power dive on an enemy carrier, or the sudden bank of a fighter plane in a dog-fight,—"Stromberg" Injection Carburetion dependably meters fuel with mathematical accuracy in proportion to air. Combining automatic metering with positive pressure-atomizing of the fuel spray, the "Stromberg" Aircraft Carburetor compensates instantly for all changes in conditions of flight. In pace with each amazing development of engine and plane designers, Stromberg engineers study the lessons of both laboratories and battle fronts to keep "Stromberg" Carburetors *as great as the ships in which they fly.*

"Stromberg" INJECTION CARBURETOR

The "STROMBERG" Aircraft Carburetor is an important member of "The Invisible Crew" . . . precision instruments, and controls, which Bendix plants from coast to coast are speeding to our fighting crews on world battle fronts.

THE INVISIBLE CREW
Precision Equipment by Bendix AVIATION CORPORATION

BENDIX PRODUCTS DIVISION
of Bendix Aviation Corporation
South Bend, Indiana

Free Enterprise

WHAT IS IT? HOW DOES IT WORK?

OURS is a free-enterprise economy the chief motivating forces of which are the prospective rewards for effort and risk-taking. Its smooth operation depends: first, on adequate incentives for risk-taking, innovation, and individual effort; and second, on sufficient competition to minimize the need for government regulation and to prevent artificially high prices or wages from being maintained in large segments of the economy. Trouble comes when these incentives and this competition are tampered with or removed.

America was founded by men who had the urge to better themselves and the courage to take a chance. These men uprooted themselves in Europe and braved the unknown. They risked all for freedom. They knew that, to be free, they had to attain economic freedom. Their goal was an economic freedom which permits the private ownership of property, the free choice of jobs, and free entry into entrepreneurial pursuits. Their efforts, therefore, were directed toward individual opportunity with no limit on individual achievement. Their foresight and the endeavors of those who followed them created the world's greatest industrial nation enjoying the highest standards of living.

We can take pride in the knowledge that our country has been the greatest single contributor to the world's physical assets even though we remember that an abundance of natural resources contributed materially to America's economic development. But the fact that our progress has been interrupted, again and again, by depressions which resulted in enormous wastes of our human and material resources is sobering proof that our economic mechanism still is far from perfect.

Our production per man-hour has been increasing at the rate of 2½% per year. Improved machines and greater efficiency have more than tripled the output per hour of work since 1900. Looking to the future, this annual rise indicates that our production per hour of work will double in the course of the next 25 to 30 years. This means that we can have twice our present volume of goods and services per capita or an equivalent combination of more production and more leisure. In other words, we can further increase the living standards and further decrease the working hours of the American people by further intensifying our industrial efficiency.

This is no idle dream. It can be achieved, and it will be achieved, if only we maintain the essential features of our system of individual enterprise which alone makes possible this near-utopian goal. Intensification of our efficiency, however, means that we can have full employment only if we expand enormously our production, and particularly our production of new goods. We can expand total production only if we have the markets and the demands for the vast output of goods and services made possible by our technological development. To attain these, we will need to venture into new markets, new inventions, and new methods. Such ventures involve risks, and risks will be taken only if there is sufficient prospect of reward.

Let us never lose sight of the fact that the essential features of free enterprise are the prospective rewards for risk-taking as well as for effort.

The evidence is clear that incentive methods of wage payments will boost production. Carefully devised systems of salary payment with large differential inducements for superior performance have been powerful means of raising the standards of managerial accomplishment.

Free enterprise cannot operate effectively unless the wage and salary system offers greater rewards for greater effort. Neither can it operate effectively unless the prospects for profit are sufficient to encourage the employment of resources which otherwise would be kept idle.

Unless the prospects of profit are superior to the prospects of loss, new ventures will not be undertaken and going concerns will not expand or continue long in business. When the hope for profits wanes, employment and production slump; when that hope revives, employment and production recover.

Business initiative must be given every possible in-

ducement in order that maximum employment may be achieved through private enterprise. This involves the removal and avoidance of restrictions on business by government, by labor, and by business itself.

Competition is the life-blood of the free enterprise system. Business and industry must rely upon efficiency rather than upon protection from competition for their survival.

Those government controls which were made necessary during the war by the magnitude of government demands for goods should be lifted at the earliest possible moment. As soon as the danger of inflation has receded, price controls must be removed and profit margins again left free to be determined by market forces. The excess profits tax must be repealed and the burden of other taxes on business profits greatly reduced. Tax laws should be revised so as to permit adequate rewards for assuming risks. The modernizing of anti-trust laws and their vigorous enforcement, not indiscriminate persecution, will be supported by all who really want free enterprise. Such measures will strengthen the incentives to expand old businesses and to start new ventures.

Grants of unlimited monopoly powers to labor unions which enable them, consciously or not, to sabotage the profit incentive in business must be withdrawn. Labor has certain legitimate rights; and in order to preserve them and its freedom, labor must come to realize that its best interests lie in a well functioning, self-disciplined competitive free-enterprise economy.

There must be evolved in the minds of business, labor, and the public a recognition of the need for private business enterprise and a realization that policies which throttle it are harmful not only to businessmen but to workers and consumers as well. Unless we achieve this understanding and avoid needless deterrents to business expansion, we are likely to pay for our folly in the destruction of our free enterprise system.

We cannot tolerate conditions in which special interest groups in business, labor, agriculture, or politics prevent free access to the market by would-be competitors. Such monopolizing of opportunities stifles progress and creates profits or wage rates based on artificial scarcity. In such cases government interference to open the market to all comers is clearly indicated. We must recognize the need for constructive policies by business, labor, and government which will insure the competition necessary for the successful operation of our economy.

Increased government regulation and control of business activities is not conducive to strengthening the virility of private enterprise. Government ownership and operation of productive resources certainly is not to be condoned. The more government rules and regulates business, the less will be the incentive to assume risks and to exercise individual initiative. Government regulation of the detailed operation of industry inhibits progress, is prey to political pressures, and is subject to the human failings of its administrators. *Better far the rough guidance and justice of vigorous, though somewhat imperfect, competition than the uncertainty of arbitrary regulation.*

The gravest threats to our competitive system exist in legalized monopolies, such as the N.R.A. once comprised, such as the labor unions and farm groups have recently achieved, such as businessmen themselves have sometimes sought. The power of labor monopolies to encroach on business profits will tend to interfere seriously with the needed flow of new investment. And when any group is strong enough to move the average level of costs as much as the labor groups and the farm groups are able to do, there is good reason to fear that, when we begin to approach high levels of employment and production in time of peace, these groups will induce a price-wage spiral which will waste money incomes on price increases instead of permitting them to draw unemployed resources into production. While the demands of labor for collective bargaining rights and the demands of farmers for protection against the rigors of depression have validity, there can be no reason for excessive grants of power and privilege which threaten to make our system of free enterprise unworkable.

Ours is a complex economic structure. The functions which prices, income, savings, investments, and taxes play in this system are difficult to comprehend.

As I have said before: Thinking is hard work, and we will have to work hard if we are to develop business policies, labor policies, and government policies which will insure full employment and the opportunity for consistent profit. Yet only through such policies can we guarantee that private enterprise will be the predominant source of jobs, income, and production.

Even more difficult than thinking, and more important, is the implementation of many policies that are in the interest of the free enterprise system. Not all measures will satisfy all people. Special interests will have to be subordinated to the total interests of the nation. Sacrifice and vision have been essential to the winning of the war. They will be no less essential to the winning of the peace.

If we can gain recognition of the crucial role of incentives for enterprise, if we stand squarely for competition and against protection or privilege for special interests, and if we bend our efforts to find satisfactory ways and means to prevent large-scale unemployment, we can have the full benefits which only a free enterprise system can produce—in industrial progress, in improved standards of living, and in the preservation of our democratic ways of life.

James H. McGraw, Jr.

President, McGraw-Hill Publishing Company, Inc.

Headlines—Or Education?

SINCE ITS EARLIEST BEGINNINGS, the aviation industry has suffered from adverse publicity. Self seeking politicians have utilized its headline value to impress their constituents and create the false belief that they were heaven sent crusaders against the forces of evil. Like the national leader who complained recently because his Congressional appearance was not timed properly to make the morning paper headlines, the professional politician selects his victims on the basis of their headline value. In this aviation qualifies highly.

No group of industrialists have contributed more and been rewarded less than the members of the aircraft industry. In its sincere and commendable efforts to take high profits out of war, Congress has been blinded to the needs of growing industries like aviation to accumulate reserves for research and development—their greatest assets. Under present policies of renegotiation the aviation industry finds itself at a terrific disadvantage in comparison with those industries whose markets are accumulating as the war goes on. Unless these situations are recognized and corrected, the whole future of American aviation and air supremacy is at best uncertain.

And yet those industrialists who are sought out for sacrifice on political altars will include a high proportion of the men whose efforts have been the greatest single factors in the salvation of civilization.

Today, these men are home front heroes in the miracle of production. With public feeling high for air power, the sniping by the politicians stings, but it cannot hurt for long. But tomorrow, as the casualties come limping home, there will be a great revulsion against war. The shouts of victory will not assuage the anguish of bereavement. And as the hysteria of war and our hatred of our enemies begins to fade, the public mind will revolt more and more against the instruments of death. Almost over night the heroes of production can be transformed into *Merchants of Death* engaged in *One Hell of a Business*. It would be a good idea for all of us to read again those books which made such a deep impression on the public after the last war.

THE POSTWAR PILL is bitter for the men who labor day and night to build the untold quantities of instruments of war. But it is best to "take it" now and make some reasonable preparation for the future. The only solution lies in immediate and continuing education of every man, woman, and child in the United States.

The time has come for aircraft manufacturers individually and collectively to take a tip from older and more experienced industrialists whose business it is to create the wherewithal for war. Public relations programs should be planned to educate all segments of the population in the constructive value of the airplane. This does not mean that a manufacturer should not tell the people about his contribution to the war effort. But let's throw away the blood and thunder stories and emphasize the life saving qualities of the airplane.

The best strategist is the one who plans to take an objective with the lowest cost in losses. Already our airplanes have saved thousands of soldiers' lives, and every plane we build and place in action will save more lives in future combat operations. The public should be told and retold this story until each home front fighter is convinced that loved ones on the fields of battle are *safer because of airplanes.*

IT WILL DO MORE GOOD than harm to give your 130,000,000 customers occasional glimpses of the ever-shrinking world. Some manufacturers have done highly creditable work in advertising campaigns in this direction.

But public relations efforts should not stop when the usual instrumentalities of the profession have been fully utilized for constructive education of the people. Aviation manufacturers should study the methods used by old established industrial organizations to familiarize the youth with their accomplishments. What school boy hasn't thrilled at the work and genius of such men as Steinmetz? And through such knowledge comes a deep, enduring appreciation of the company that made his work possible.

This conception of creative public relations goes far beyond anything the aviation industry and many other industries have done so far. It is a costly, long term enterprise and cannot be accomplished over night. It should have been started sooner, but it is not too late to start it now. And if it is done and done well it will do much to divert the efforts of future political opportunists who live by headlines, preferably in morning papers.

Leslie E. Neville

EDITOR

America at War

From plane factory to fighting front is a long process . . . . Germans work hard to stop bombing . . . . Increase noted in production of improved fighters and employment of new weapons . . . . Allies stretch range of fighters for more effective bomber escort . . . . Problem of licking Japs still looms as most formidable of war . . . . International air questions are forced into open.

THOSE IN A POSITION to know the facts of the air war in this period, both military and production men, are surprised at the difficulty and long time required in getting warplanes from factory to combat.

Difference between the total of delivered planes since the first American models, and the total now in use on all fronts, is amazingly high. In other words when you add up planes produced you are surprised at the lesser number in use—a number which, of course, cannot be published.

Some small part of the time lag is chargeable to requirements at modification centers. A great many planes are going through modifications for battle and a great many of them are elaborately changed. In some cases, man-hours put on modifications stack up to thousands per unit. In fact, producers and the armed services have been accused of rushing airplanes through factory lines and adding them into the monthly total to make an impressive production rate, whereas actually the planes are nowhere near ready for action and should not be counted until they are. Though it is highly doubtful that this is done intentionally, the effect is the same: The total of airplanes that comes out of plants is higher than the total ready for war.

Modification time is only one factor, of course. The pipe-line that carries planes from completion in this country to dispersal blinds at the front is a long and tortuous one.

When one considers the number of planes in the hands of squadrons and the number of fronts on which they are deployed one wonders how they can have done so much damage as they have done to the enemy.


Army and Navy are begging for more planes, faster. It is doubtful if they will have enough even on Hitler's judgment day. Airplanes are now number one, two, and three on the war command's priority list. Both services are taking measures to help the industry run the rate up to 10,000 per month by the new year if it is humanly possible.

The Army called a conference in Washington of war industry bosses, labor, and the press. The Navy has just set in motion a new incentive program by which it will try to jack up the fighting spirit of management and workers on the home front.

Behind closed doors, during the Army's conference, war goods producers were told some very disturbing facts about our losses of materials and the punishment our soldiers are taking. The story of our airmen's battle is not what it sounds like in the newspapers. The whole truth cannot be told because the facts would be useful to the enemy. Some of the aircraft company presidents in attendance, who have had more contact with the government than other war manufacturers, said they thought the Army painted the picture a little too dark. But even with some discounting the story is bad enough.



Beneath huge clouds of smoke lies wreckage of Germany's second largest fighter plane factory, tucked away (the Nazis thought safely) in a bend of Danube near Austrian border at Regensburg. American *Flying Fortresses* made this long raid in daylight, destroyed more than 140 Nazi fighters in process. (British Combine.)

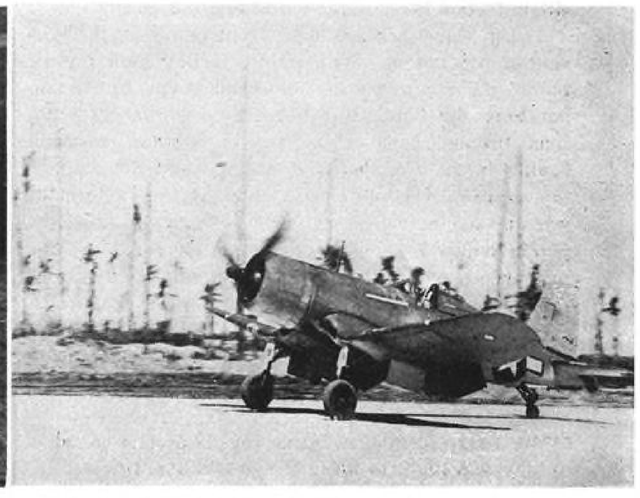

What can't those Seabees do? A brief 46 hr. after Japs were driven from Munda airfield, this Marine *Corsair* rolled to an easy stop on a "velvet" field restored by hard-working Navy Seabees. Stripped trees in background are mute evidence of furious fight waged at field. (International News.)



One of the war's most perfectly executed airborne troop attacks. American parachute troops land behind well-laid smoke screen in New Guinea to trap 20,000 Japs at Lae. Southwest Pacific Command has established a continuous record of brilliant all-round employment of air power in all of its forms. (International News.)

The Germans are now behaving like scared burglars. They are desperate and dangerous. The Luftwaffe is getting a lot of good defense fighter planes. Bomber production was discontinued last December. Nazi laboratories are working frantically to find new weapons and means of destroying our air power. The Germans are especially determined to stop the B-17's and the B-24's which are finding their vital plants and military establishments by daylight. Gen. Arnold says they must not be allowed time to perfect their defenses. Other military observers from overseas say the Germans have a fighting chance of stopping the Allied bombing attack much in the same way that we stopped the German U-boats—by going after them hard with new weapons.

(*Turn to page* 311)

Let's Be Calm About the Helicopter

By LOU LEAVITT

Former Test Pilot at the Pitcairn, Kellett, and Platt-LePage companies and now rotary wing consultant to two major manufacturers.

Overwhelming publicity—much of it not even half-baked—threatens the rotary wing aircraft. A case of "too much and too quick," this trumpeting will speedily ruin the prospects of the craft, says this veteran test pilot—unless the trumpet is muted.

ADVENT of the helicopter has been heralded with a torrent of publicity—a torrent which is fast threatening to become as destructive as that which first awakened public enthusiasm for the autogyro. Why a basically new type of aircraft which has not as yet wholly convinced the airmen and engineers who make their living at aviation should immediately be vaunted as the answer to a housewife's prayer is not very understandable unless it be explained by the American flare for all-out enthusiasm in a new cause.

Lord knows, I am no skeptic where the rotary-wing is concerned. I have spent twelve years in its development and have seen many of its greatest critics become, practically overnight, its staunchest advocates. But I have seen, too, what this type of flash publicity and bandwagonism can do to a sound and logical idea.

The early autogyro had much that might have proven practical and highly advantageous as a flying machine. But it was represented, before its development was even well started, as the be-all and end-all of safe aircraft. It was safe, I grant you. Very few people ever actually got themselves killed in it. But very few people ever actually learned to fly the thing without breaking it up in every nook and cranny of the country-side.

Why? Certainly not because of any basic fault of the machine. Here was an aircraft that would take off and land in the most restricted areas, that could hover or descend almost vertically, that far exceeded in maneuverability anything an airplane could possibly attempt in the slow speed range. But it was advertised as fool-proof—the ultimate solution in aviation for the "man in the street." One advocate even went so far as to proclaim that "in practically any emergency condition it can take care of itself and of the man who flies it." But the attitude of many who flew was that no self-respecting airplane pilot who had spent years perfecting his piloting art was going to demean himself by being seen in such a craft. And those who might have made of it a practical and useful aircraft were quite understandably blinded to its very real values by these exaggerated claims.

Furthermore, as an aircraft it was never a finished product. It never became a finished product largely because the American public never let it become one. The well-nigh hysterical wave of publicity which swept the country also swept the few closely-owned, patent-holding companies with the result that the autogyro was literally tossed into the hands of enthusiasts who lacked even the ability to ride a bicycle. I know, because I tried to train some of them.

Thus the budding industry experimented with road-ability; it worried about the folding of rotor blades to fit into garages; and it tinkered with hydraulic devices and automatic gadgets to appeal to the mind and eye of automobile drivers. In the process it neglected to produce the flying machine that might so easily have been perfected. And the fields that were open to it, the logical and obvious fields of development that were crying their need for just an aircraft, were never given more than a passing thought.

New Public Attitude Needed

Conceivably the autogyro might have been saved by the war. A far-sighted and understanding policy might have done the trick. But in wooing government aid, the autogyro companies found themselves facing a new master, as little versed in true rotary-wing values as the premature publicity that had already proved so damaging. By moving under military surveillance, the autogyro became just another type of airplane, but it was no more comparable to the airplane than it had been to the automobile—except, perhaps, that it was an aircraft.

To expect the perquisites of the airplane, in addition to its own peculiar characteristics, was as fatal in the long run as the earlier policy had been. The 'gyro could not compete with the modern airplane in load-carrying capacity, in speed, or in efficiency. It never had a chance to develop its own field.


In 1935 I tested, demonstrated, and obtained a Department of Commerce license for a direct-control autogyro, the first of its kind to be so licensed. It was a good ship—maneuverable, easily handled, comfortable to fly. Granted, it was not perfect, but it was a good start toward a worthwhile ideal. What happened to the ideal? Well, somewhere between the "man in the street" and the observation, pursuit, bombardment setup of the military picture, it got lost. That very ship—eight years later—can still hold its own with any rotary wing aircraft.

This is indeed a sorry picture, but I have dwelt on it because it is so obviously an object lesson. With the passing of the autogyro—obsolete before it ever was perfected; far worse, obsolete before it ever was really *used*—the helicopter comes valiantly into the picture flaunting the same sorry banners. Already we have seen articles about housewives flitting merrily about the sky in one, with pictures of them gassing up at the local filling station. We are told it is the "flivver" of the future. Aircraft companies, vaguely contemplating post-war development, are already receiving deposits from individuals steamed up no end by this new flying idea which, if you would believe feature writers and newspaper columnists, is practically an accomplished fact. And, judging by the number of rotary-wing experts that have suddenly popped up all over the country, the need for a wailing-wall is going to be terrific in a very few years.

But what of the helicopter in the meanwhile? Will it go down, as the autogyro did, under the weight of publicity which patronizes a trend set by people who, in most cases, have never even ridden in an aircraft, much less know the limitations involved?

After all, the helicopter is an aircraft. Let us not lose sight of that significant fact. It is supported by, and dependent upon, the air in which it flies. As an aircraft, it has wonderful and far-reaching possibilities *as an aircraft*. But, as an aircraft, it has far to go before it reaches anything like perfection.

There are many problems still to be solved. Igor Sikorsky has succeeded in solving some of them. More power to him. He has evolved a machine that flies, that is controllable, that shows many of the latent possibilities inherent in this type of aircraft. But I do not believe this ship is the ultimate answer any more than the Wright brothers' first airplane was the ultimate answer to

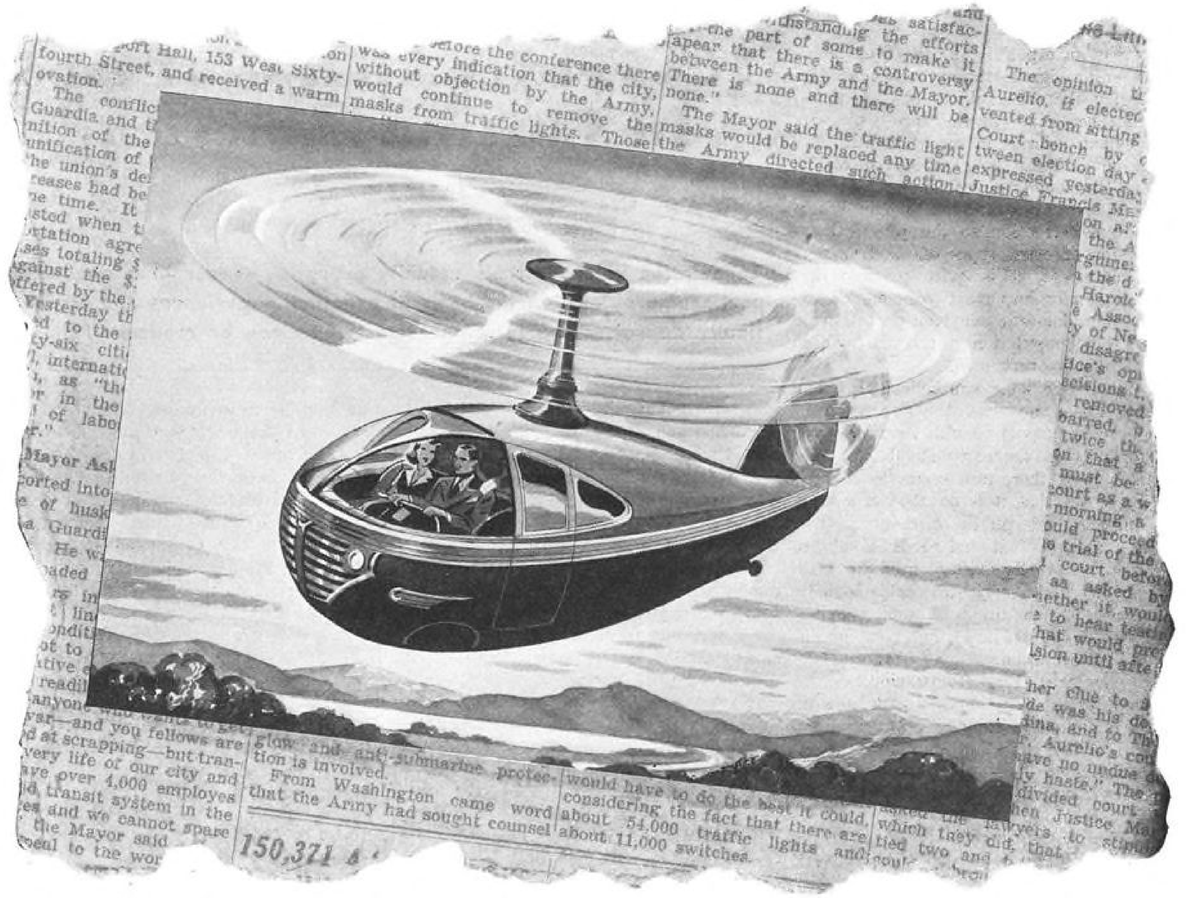

modern air transportation. And who, in those days of crude craft, ever dreamed of haling the housewife into the air?

Why this intense concentration upon housewives and men in the street anyway? The rotary-wing was not originally conceived with any such idea in mind. This "family" business has been tagged on by misplaced publicity and enthusiasm, and it is high time it was thrown into the discard where it belongs—or at least into the future. The rotary-wing deserves better of our efforts than these fantastic dreams, for it is a means of flight that is needed in aviation and needed *now*. It covers a range of speed and maneuverability never before open to aircraft, and it is up to us to concentrate on that range to develop its full usefulness.

The helicopter is needed even more than the autogyro was needed, by virture of its ability to fit, even better than the autogyro, into the fields of endeavor and achievement open to this type of aircraft. It is needed by the Coast Guard for shore patrol, for rescues at sea, for the transfer of sick or wounded ashore. It is needed by the Department of Agriculture for insect control, for the spraying of crops and orchards, for the spotting of infestations from the air. It is needed by the Forestry Department for fire spotting, for the placing of personnel and equipment where they will do the most good in fighting large fires, for the direction of fire fighting from the air. It is needed by the farmer. It is needed by the large scale rancher.

And surely it is not necessary to point out how useful it could be to the military services—not as a pursuit ship, or a bomber, or an observation plane, and thereby forced to live up to the airplane standards set for these ships—but for the transfer of personnel behind the lines, for artillery fire control, for courier service. Moreover, if we are set and determined to compare it with the airplane, how about inter-city mail service? Let us give it the break that the airplane got; for the airplane, if you remember, owes much of its early development to the perfecting of this service. The helicopter, too, could reap untold benefits by developing inter-city mail lines, carrying the mail from post office to post office, thus eliminating the present necessity for trucking between airport and post office.

This is no far-off dream of the future, either, for the idea has already been played with, more or less tentatively, perhaps, but with a substantial degree of success. As far back as 1935 I had the privilege of landing the first mail on the post office roof in Philadelphia. The idea caught hold and an airport to post office route was then established with autogyros, though unfortunately the plan was never carried to its logical conclusion of city-to-city short haul mail throughout the country.

These are but a few of the more immediate needs for this type of aircraft. It does not take much imagination to discover more. An aircraft that takes off and lands vertically, that can fly forward, backward, or sideways, or hover stationary, in relation to the ground, does not have to compete with the airplane to find its realm of usefulness, nor does it have to cater to the whims of public fancy to be saleable.

But, as I have tried to point out, the helicopter is far from perfection at the present writing. Nor will it ever attain that perfection until it gets down to cases on the things it can really do. Fortunately, the patent situation does not parallel that of the autogyro, and I firmly believe that the helicopter's future success will be in the hands of the larger aircraft companies which have the facilities and the personnel to exploit its many advantages wisely.

When the helicopter is built to meet

(*Turn to page* 335)

The Feeder Airline's Place In Postwar America

By JAMES G. RAY,
Vice-President, Southwest Airways

An aviation veteran who's actually operating feeder lines analyzes pertinent problems on the basis of practical experiences and realistically appraises the future services which can be rendered.

It is an especially healthy and heartening sign to the entire aviation industry that the subject of feeder airlines has come to the fore with such amazing celerity in recent months.

For had the long period of official and unofficial discussion on international airways continued to hold Washington's attention to the practical exclusion of other types of air transport development, it is quite possible that our equally important problem of extending domestic air transportation to all our population would have been completely overlooked.

There are some who believe that, had there been no war, the expansion of feeder transport would have occurred normally in the early 1940's. Be that as it may, there now seems to be little doubt but that it is on the verge of a long-deserved public discovery. Two new and vital national needs—combined with the already existent need for making direct air service available to more than just one-third of our people—have played an important part in this sudden evolution.

They are: First, to provide postwar employment for the thousands now in all phases of military aviation; and second to find something for our aircraft factories to do to help them through the period of reconversion to a peacetime basis.

That we must solve these two problems is a foregone conclusion; hence, we cannot afford to minimize the effect of any sound program such as the widespread establishment of feeder airlines, which is a step in the right direction.

The end of the present world conflict will bring home thousands of pilots, mechanics, and other technicians who will need jobs. For the sake of future aviation development and progress, it will be desirable to create as many positions as possible in aviation activities for these highly trained men. Aviation can use them just as much as they can use aviation as a source of employment.

It is repetitious to say that, after the war, aviation faces the greatest development in the history of transportation. To assure its successful development, every man will be needed. If those who return from the service are forced to find employment in some other industry, it is probable they never will return to aviation—not to mention the fact they will be disillusioned over its failure to find a place for them.

As for the problem of our capable aircraft factories, I hope that if we have learned anything from this war it is the fundamental lesson that our future national security demands that we keep this industry going at all costs. We must never again be caught unprepared, either in manpower or materials.

To keep the machinery and skills of these factories intact will require a sharing of the burden, by military, commercial, and private aviation alike. Our present trunk airlines cannot alone purchase enough new equipment to maintain production indefinitely—but a vastly expanded industry could take a long step in that direction.

Of course we do not offer the establishment of feeder airlines as a solution for these two problems in their entirety. It is obvious that the number of feeder routes that can logically be established limits the size of this development and the amount of employment it can support. But certainly promotion of the feeder airline field will constitute a step—and a big one—whose influence on the problems over a period of years will be considerable.

Fortunately, feeder airlines are not so replete with unsolved operating problems that almost immediate widespread development is impracticable, for considerable progress had been made in finding solutions even before the war.

In addition, the wartime emergency has (1) brought into existence the nation's second feeder airline, operated by our company over a large West Coast area for the Army Air Forces, and (2) greatly expanded the pioneer feeder airline system operated by All American Aviation. This has afforded still more opportunity to obtain valuable operating data and experience.

Perhaps the most important problem which has tended to delay general adoption of feeder airlines is the difficulty of maintaining schedules which capitalize upon the airplane's chief asset, speed.

The pickup type of feeder operation has successfully solved this problem for mail and express, solved it so well that pickup schedules can be operated which are closer to the actual cruising speed of the plane than feasible on trunk lines.


A study of trunk airline schedules indicates that with the DC-3, which has a cruising speed of about 185 mph., the scheduled speed is only 130 mph., a 70 percent utilization of the airplane's speed. On the other hand, All American Aviation has demonstrated conclusively that pickup schedules can be set at 80 to 85 percent of the cruising speed. There are two reasons for this: Feeder planes fly at low altitudes where head winds are not so strong, and feeder routes are almost always so crooked there are no continuous head winds.

However, I think it is obvious to all of us interested in the development of feeder transport that it must carry passengers, as well as mail and express. An air service that does not render all three services is not fulfilling its complete function.

Passenger carrying means slowing down of schedules, particularly if frequent landings are required. It is safe to predict that this will prove no major problem at the outset, for landings undoubtedly will not be required at anything like all of the points to be served. Thus, a combination of pickup and landings will work satisfactorily, both from the standpoint of the operator and the passenger.

Tests have been run in which passengers were carried through pickups, and nothing was found in the maneuver that was in any way objectionable. Almost without exception, test passengers indicated a preference to "fly through" a pickup rather than to land.

(*Turn to page* 300)

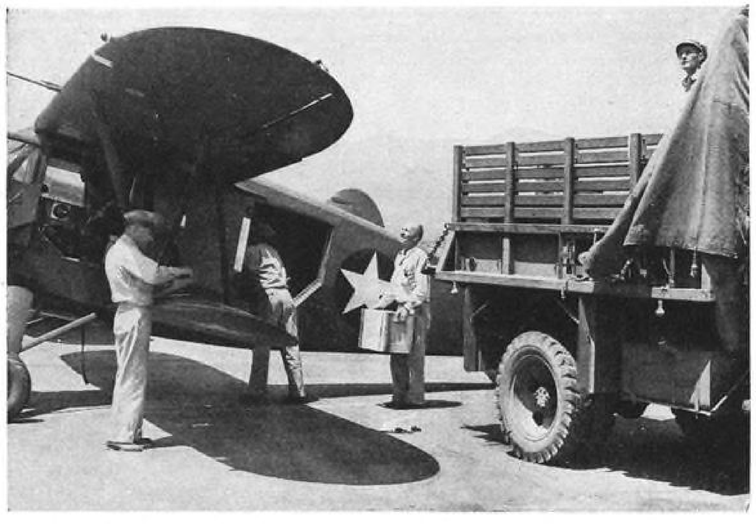

"Hot freight" goes aboard Southwest Airways-operated feeder line plane to beat ground delivery time by as much as two days even though distances covered may not be great. Plane is four-place Waco, adapted to wartime job by such changes as installation of large cargo door.

Interior view shows how Southwest Airways converted Waco to wartime cargo lugger to speed delivery of vitally needed shipments to Army bases.





How eleven feeder routes could give air cargo service to 2,500,000 people in 295 cities is illustrated by this map showing routes applied for by Southwest Airways Co., of which author is vice-president. Company has already piled up backlog of experience in some of this territory through operation of feeder service over unrevealed war routes.

Design for Survival

By JOHN FOSTER, JR.,
Associate Editor, "Aviation"

Aircraft producers' biggest problems can only be solved by Congressional action—with the help of the industry itself. A working design is available, but a big question remains: Will aviation give that help?

A PATTERN for the near-future course of aircraft production has been drawn by the nation's No. 1 industry itself—but whether the industry will work as a group to translate that design into a working model remains to be seen. It remains to be seen because of the knowledge—disconcerting as it may be—that the necessary 100 percent backing hasn't yet come to fruition.

On one fundamental point, however, there is unanimous agreement. This is that the aircraft industry's most pressing problems can be solved only with the backing of Congressional action. The approach must be made through *legislation* which will establish the national policy, not through *orders* of government agencies.

Meanwhile, Congressional leaders who today are working on legislation which will help solve these problems look to the industry for guidance. They feel perfectly justified in expecting—even in demanding—a united front by the industry.

Complete Cooperation Needed

Such guidance can grow from the preliminary design that came out of the recent Colorado Springs meeting of the Aero Chamber's Economic Development Committee. Whether the finished plan bears even extensive changes, or whether it is presented through the chamber or some entirely new trade association, are minor considerations. The point is that cooperative action, such as that which has been shown repeatedly through the Aircraft War Production Councils, is essential.

Perhaps nothing calls for quicker and more concerted action by the nation's plane builders than the renegotiation act. It is conceded that the aircraft industry's survival depends upon a change in one of the act's fundamental concepts. The act must be changed, as the committee recommended, to "let taxation come first and renegotiation come second." As was so ably pointed out at hearings of the House Ways & Means Committee by Francis A. Callery, Consolidated Vultee vice-president, and Ralph S. Damon, American Airlines vice-president, contract renegotiation should be based on net profits (if any) *after* taxes.

Whether, as Callery urged, Congress designates net profits of 3 percent on sales as the floor below which renegotiators may not go, is one of those parts of the preliminary design which can, if necessary, be changed. The fact remains, however, that the entire industry can agree that renegotiation needs to be revamped to become effective after taxes, and on this point it can present the essential united front to Congress.

An interesting feature—action upon which might well prove the industry's desire and ability to work together—is the committee's recommendation to "remove present secrecy from renegotiation so that management can know the treatment given to competitors before signing up." Certainly the present administration, with its predilection for seeking out cartels and secret agreements, should go along with this idea.

Closely allied with renegotiation is the vast problem created by the dire need for adequate postwar reconversion reserves. But here, too, there is available a design from which to work, for the committee recommended Congressional authorization of such reserves equal to 15 percent of the total normal, surtax, and excess profits tax that would be payable in event the reserve were not allowed.

This figure of 15 percent seems a reasonable amount on which the industry could easily present a united front to Congress, particularly in view of the fact that British producers have coming to them a 20 percent postwar tax refund—a refund established partially for the avowed purpose of recapturing foreign markets.

While this fact serves as a reminder to Congress that the country needs, and needs now, a national aviation policy, it by the same token must serve as a reminder to the industry of its obligations—both to itself and the nation—to become active in writing that policy.

Just as important, and as much of a headache, is the problem arising from contract terminations. It, too, presents a job on which the industry may or may not, as it chooses, be of material assistance to Congress. For action such as the committee recommended be taken is needed to formulate "a broad declaration of national policy in connection with settlement of war contract termination claims which should be a guide to contracting officers in settling, and to federal courts and boards in rendering, decisions on contract termination claims."

Basis for Plan Ready

But here, too, the design has been provided—in the committee's recommendation for "legislation providing for uniform termination procedure which will be applicable both to existing and future prime contracts and subcontracts which would assure the legality of regulation issued thereunder. Any legislation should, however, recognize the validity of commitments made in good faith prior to the effective date thereof."

Outstanding point of this part of the design, and one sure to get vocal attention from the industry's snipers, is that urging "mandatory advance payments up to 90 percent of the cancellation and termination claims without any interest charge."

Why 90 percent, when general industry asks for but 75?

For the simple reason that a decline of but 11.6 percent in inventory values alone could wipe out the industry's entire working capital. Come the end of the war, such a decline probably wouldn't represent even the first five minutes' inventory value drop.

(*Turn to page* 253)

• The Economic Development Committee of the Aeronautical Chamber of Commerce came out of its recent Colorado Springs meeting with, among others, two important recommendations for action by the chamber's Board of Governors.

These recommendations can, says the author, form the preliminary design for a course of action by which the industry can help itself and Congress—action which will be necessary for final solution of vital problems facing the nation's biggest industry. Even though they may be changed, these resolutions on contract renegotiation and termination might well form the basis upon which the industry can show 100 percent cooperation on questions which affect its very existence.

Cancellation Demands Action—And Quick

By RAYMOND L. HOADLEY
Financial Editor, "Aviation"

Against a still-weird backdrop of 1918 contract-termination ghosts, today's governmental Macbeths are beginning to repeat World War I's tragic cancellation lines. Congress alone can write in the practical legislation needed to save this legal script. And it will take writing on the double to do it—for Act II is coming up fast.



IF WE WANT TO WIN the peace as well as the war, speed is just as essential in terminating war contracts as it was in letting them. Yet the contract cancellation situation is just as confused today as it was six months or a year ago.

Meanwhile, nearly $9,000,000,000 worth of war contracts have already been cancelled, compared with $7,500,000,000 at the end of World War I.

We are drifting into contract cancellations just as casually as we did in 1918. Now, as then, the various government procurement agencies lack a uniform termination policy. And now, as then, Congress delays on termination legislation, provides no relief for damages suffered under defective contracts.

If the war should end today more than $100,000,000,000 of claims would have to be investigated, negotiated, and (many of them) litigated. There is not sufficient manpower available to handle the 250,000 contractors and more than 1,000,000 subcontractors who would be standing in the termination breadline. Behind them would be millions of workers unable to get jobs in paralyzed industries.


More than 12,000 claims had not been liquidated nine years after the last war and, as Sen. Murray of Montana recently pointed out, some claims from that war are *still* unsettled. The War Department had—by the end of August—effected final settlement in 6,191 terminated cases out of 8,520 pending. But because the amounts involved in this war are so vastly larger, the consequences of delays are much more serious. It will be disastrous enough for the large companies to have their working capital tied up in contract termination knots. It will inevitably sound taps for the little fellow.

Experiences war contractors already have had with termination show what a lengthy red-taped affair it can be and often is. Westinghouse Electric & Mfg. Co., for instance, has had large amounts of working capital tied up in cancellations of contracts totaling over $141,000,000.


What would happen in like circumstances to the aircraft companies, none of which have the financial resources of this great electrical equipment concern?

Another example is International Harvester, which had a $200,000,000 tank contract cancelled last April just as tanks were beginning to roll off its assembly lines. Some 500 subcontractors and 1,500 other firms were involved in this huge contract. Harvester had to

(*Turn to page* 320)

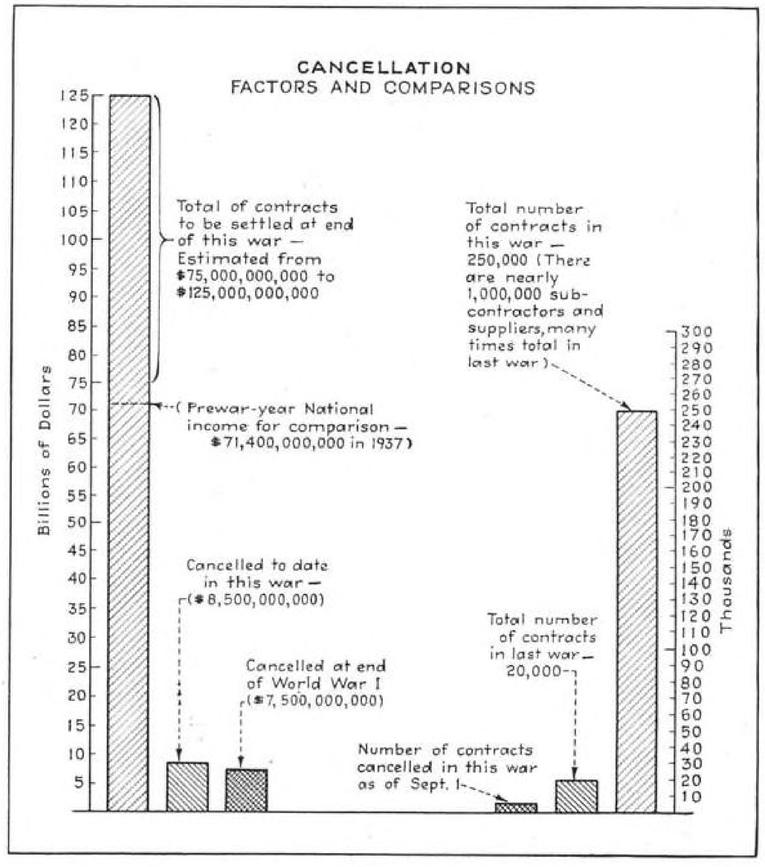

Over 50 Tons
the weight of two flying "FORTS"
ON EACH BLADE BEARING

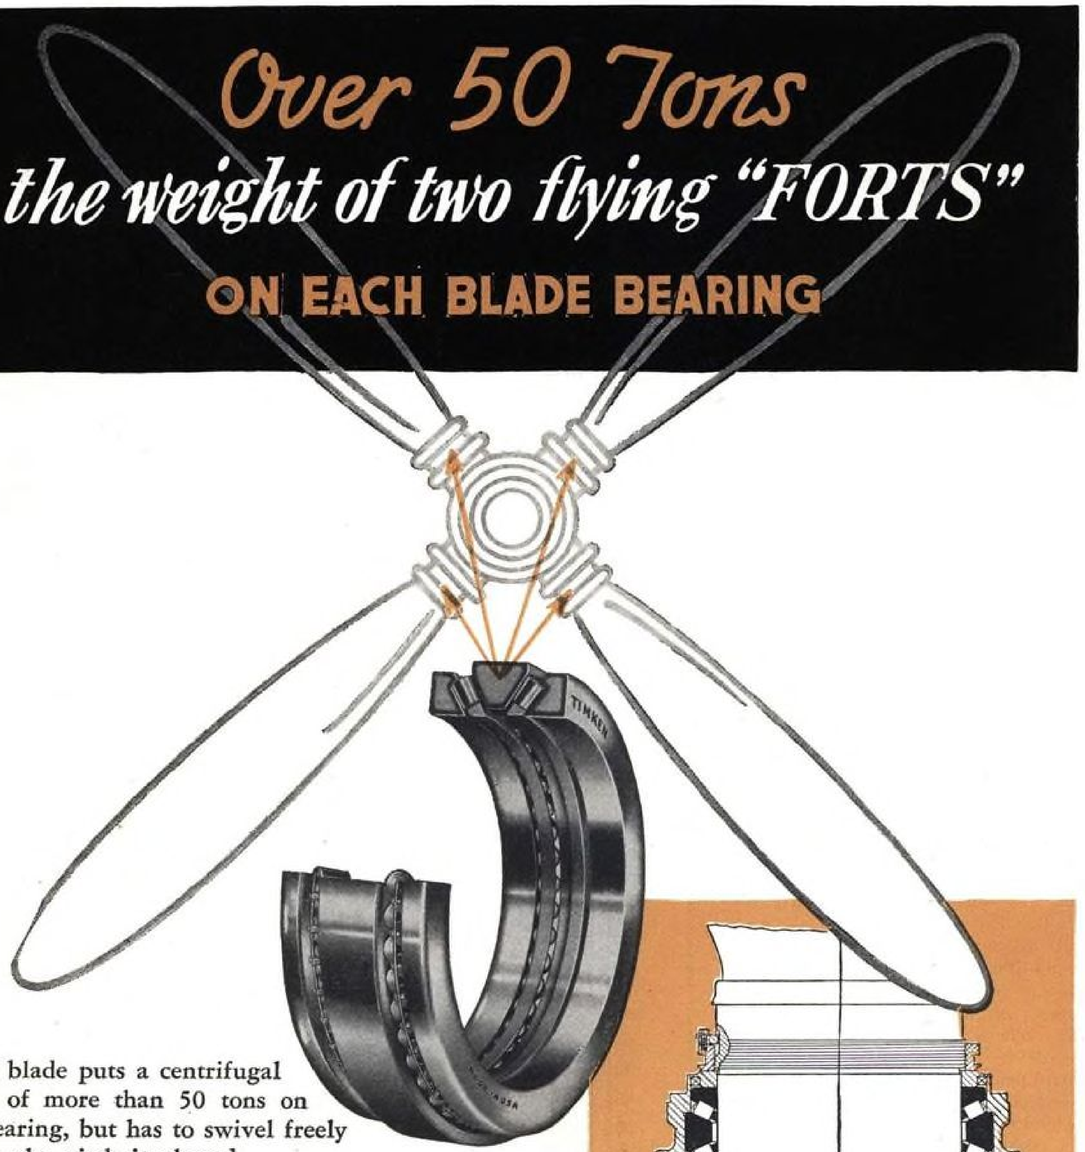


Each blade puts a centrifugal load of more than 50 tons on its bearing, but has to swivel freely when the pitch is altered.

Yet that, comparatively, is the easiest part of the bearing problem. Various tilting forces must be taken into consideration; those due to inertia, those due to heavy propelling thrust, and those due to gyroscopic effects.

All these forces, applied at a long leverage, have to be carried by a few rollers on opposite sides of a base of only 6¾" span.

The section shows the specially developed Timken Tapered Roller Bearing that carries these complex loads with freedom of action, but without a hint of backlash. On your bearing propeller feathering problems consult The Timken Roller Bearing Company, Canton, Ohio.

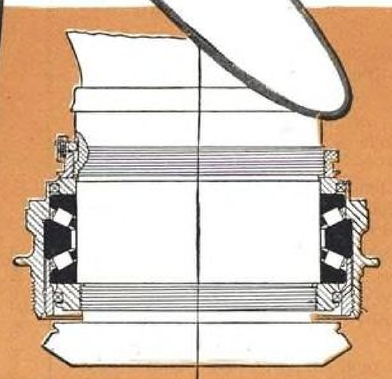

HIGHER LOAD CAPACITY
INCREASED STABILITY

Wherever the Timken Tapered Roller Bearing is used it results in higher load capacity and increased stability against every combination of stress. This illustration shows Timken Bearings as mounted in the hub of a controllable pitch propeller blade.

TIMKEN
TAPERED ROLLER BEARINGS

Associate Producers Plan Speeds CG-4A Gliders

By OTTO W. TIMM
President & Chief Engineer, Timm Aircraft Corp.



How eleven California manufacturers pooled their peace time equipment "the associate way" and are doing an outstanding job producing troop gliders. . . . Told by the man who effected the practical plan.


OUR American aviation industry's contribution to the winning of the war, and the peace to follow, will undoubtedly constitute an enormous portion of the total Allied effort. It will, it seems certain, afford all divisions of the industry an ample portion of the satisfaction everyone of us gets in playing an important, even if small, part in the making of history. But, we also like to feel that in doing our part we conceived and executed something that adds to the sum total of our industry's accumulation of vital experience and knowledge.

Such a contribution, we believe, is our Timm Aircraft & Associate Producers system of building the CG-4A troop transport glider. Designed by engineers of the Army Air Forces and the Waco Aircraft Co. and built by several other aircraft and glider concerns, the product is a standardized one in which nothing in design or choice of material can be original. Very little that is original can be contributed by individual contractors to the basic methods of its construction. However, accomplishment of the desired results quickly, utilization of existing plants and machines, and more efficient application of exceedingly scarce skills have been combined to constitute the best thinking and most energetic action of which we were capable.

Realizing this, and being familiar with the problems inherent in the already widely used "prime" and "sub" contractor method of assembling facil-



Even large subassemblies are easily welded in these revolving jigs.

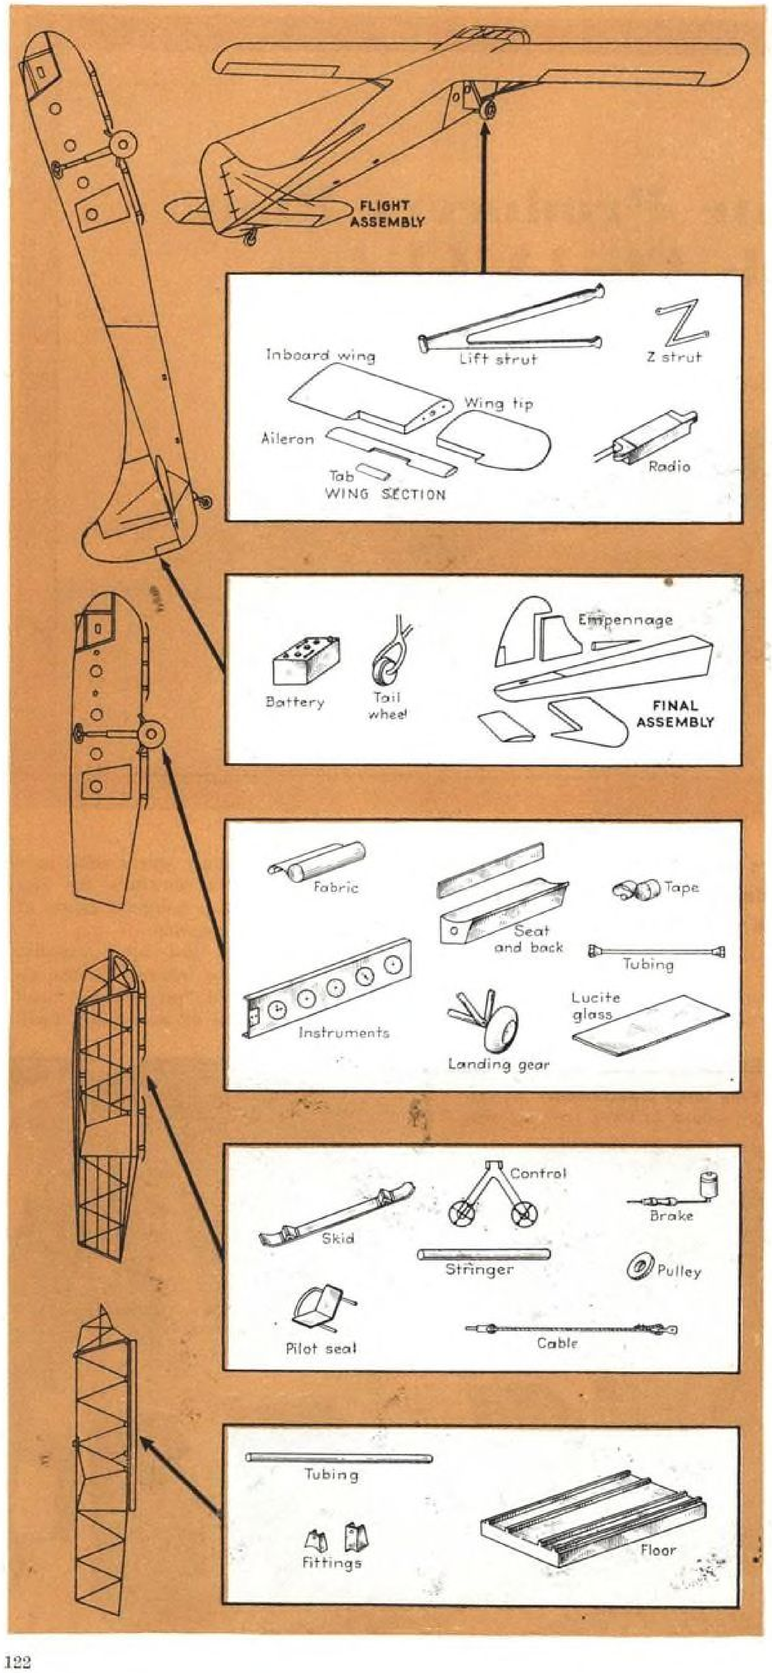

Order of flow of prefabricated components in assembly at Timm plant.

ities and "know-how," our search turned toward finding still another system which might prove even better. With our judgment now confirmed daily for the past several months, we feel that a contribution may be made to the industry's war effort by reporting our experience with this program, which we call the Associate Producers Plan.


With our belief in gliders as military weapons confirmed by the Nazis' successful use of them, we launched a search for a plan to make them quickly. We figured the system we needed should not require erection of large, new plant buildings and the purchase of extensive and hard-to-get equipment. Yet it should quickly produce the quality and volume our AAF would undoubtedly require.

Weeks and weeks were spent searching the Los Angeles area, where the Timm peacetime aircraft plants are located, for established concerns with the plants, equipment, and knowledge for manufacturing the various components of a big glider. The result has been a pooling of manufacturing facilities that pours in the components from virtually all geographical directions—to a centrally located final assembly line. This entails no excessive transport requirements and demands not one cubic foot of new plant construction, yet it gives volume production that is easily meeting continually increasing contract requirements.

This preliminary work was done shortly after the German glider invasion of Crete—long before our U. S. glider program got under way. When the AAF asked members of the aviation industry to undertake portions of its glider program, our associate producers plan was the major factor in obtaining for our group the only transport glider contract awarded on the Pacific Coast.

Instead of the usual prime-and-sub-contractor arrangement of transporting components to an already established assembly plant (sometimes not conveniently located) Timm Aircraft Corp. leased an existing, although not perfectly suited, warehouse building because it was the hub around which the other plants were ranged. With a minimum of building alterations, we set up our fuselage final assembly line in this structure.

To this line flow components fabricated by ten of our eleven associate producer companies, several of them larger than our own organization and most of them longer established. Each fabricates one or more components or parts. These producers were selected on the basis of their peacetime experience in working with the materials, with consideration of the skills and equipment they could bring to bear.

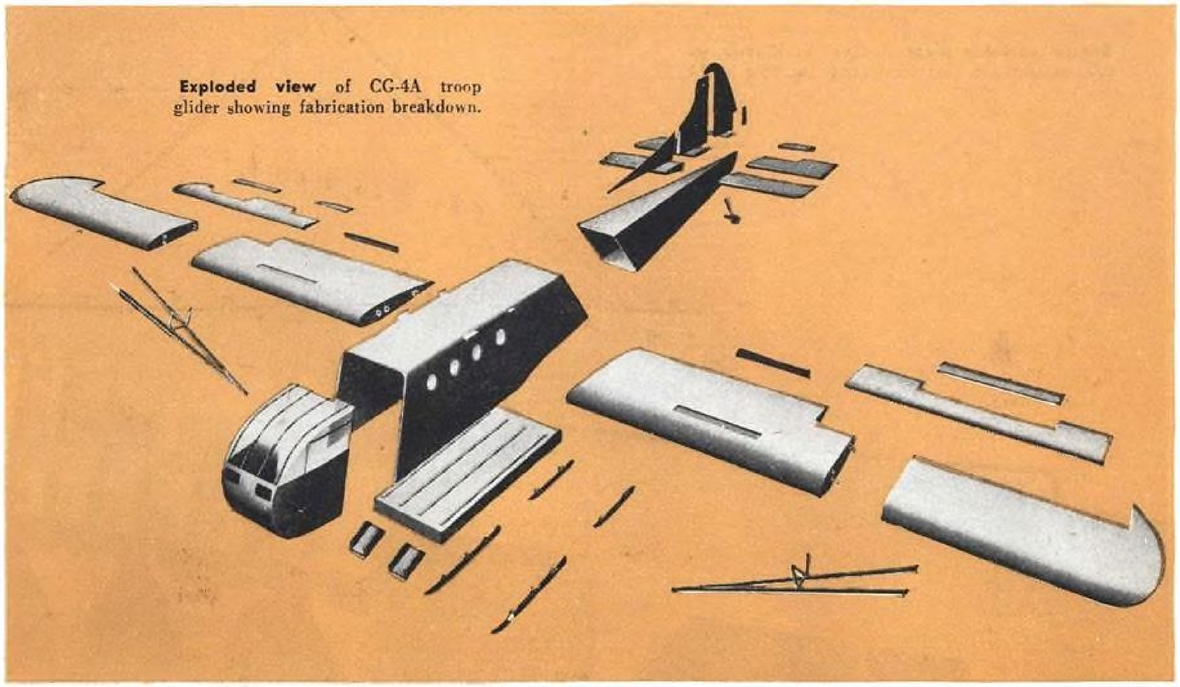

Exploded view of CG-4A troop glider showing fabrication breakdown.


Being familiar with the glider in all of its phases, the Timm organization supplies all materials, general supervision of fabrication and, in some instances, the timekeeping and bookkeeping. Timm liaison men (some call them expediters) are on duty in all of the plants to help solve problems and to keep production rolling smoothly. Other than that each associate is on his own, doing his job or jobs by means developed by his own staff. Our own inspection and that of the AAF is, of course, done in each plant.

In all instances where it has been deemed necessary, we have set up a primary and a secondary (or emergency) source of each component. If a stoppage, for any reason, should shut off production in a primary source plant, schedules can still be maintained, at least for quite some time, through production of the component by its secondary source.

Without attempting to classify the associates in an "order of importance" sequence (because all are ranked equal and all work done is vital) let me list them and briefly outline the backgrounds which prompted their selection for these jobs.


Inner and outer wing sections and several smaller parts are the responsibility of the Weber Show Case & Fixture Co., which in prewar times was the largest concern in those fields in the Southern California area. The company's 40 yrs. of experience covers all manner of fabrication with hard and soft woods, plywoods, plasties, and

Simple construction and quick-acting clamps reduce assembly time in this jig.

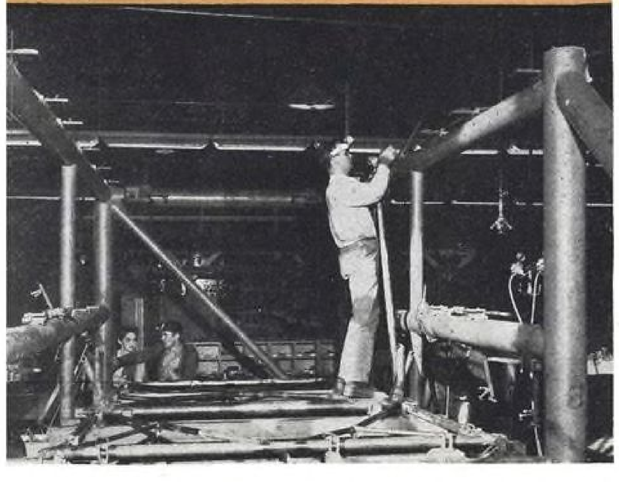


Jigs are welded by Harlow Aircraft Co., using gas piped from a central source.



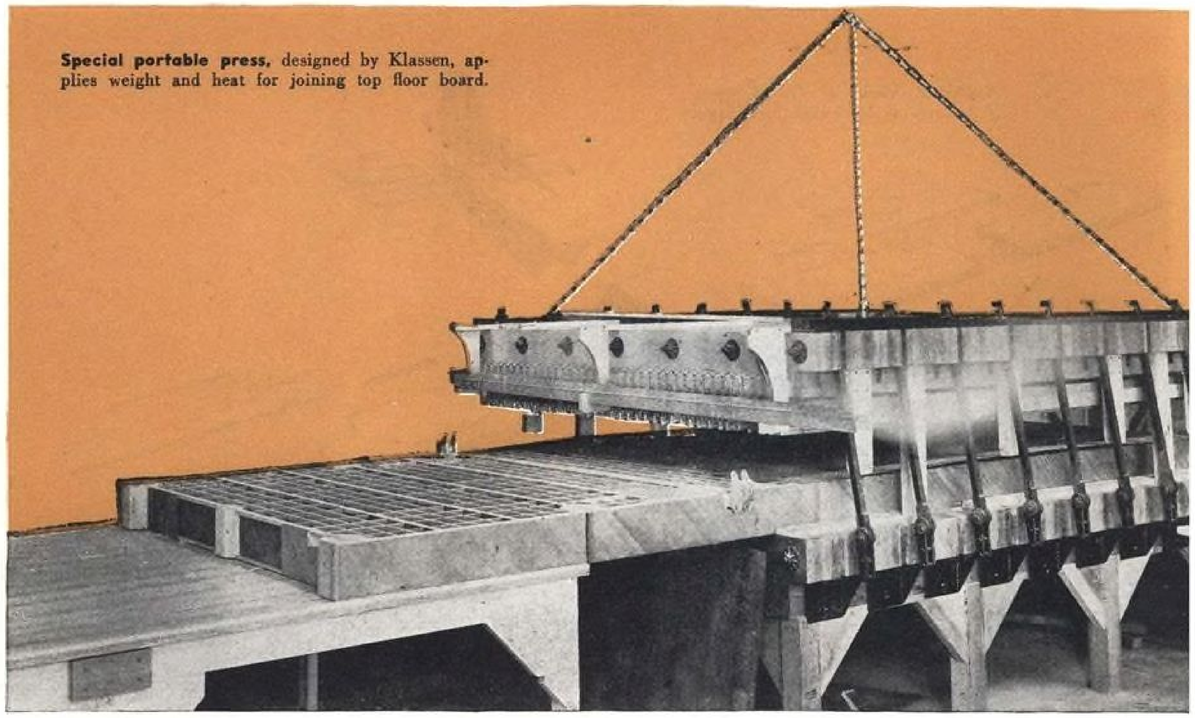

Special portable press, designed by Klassen, applies weight and heat for joining top floor board.

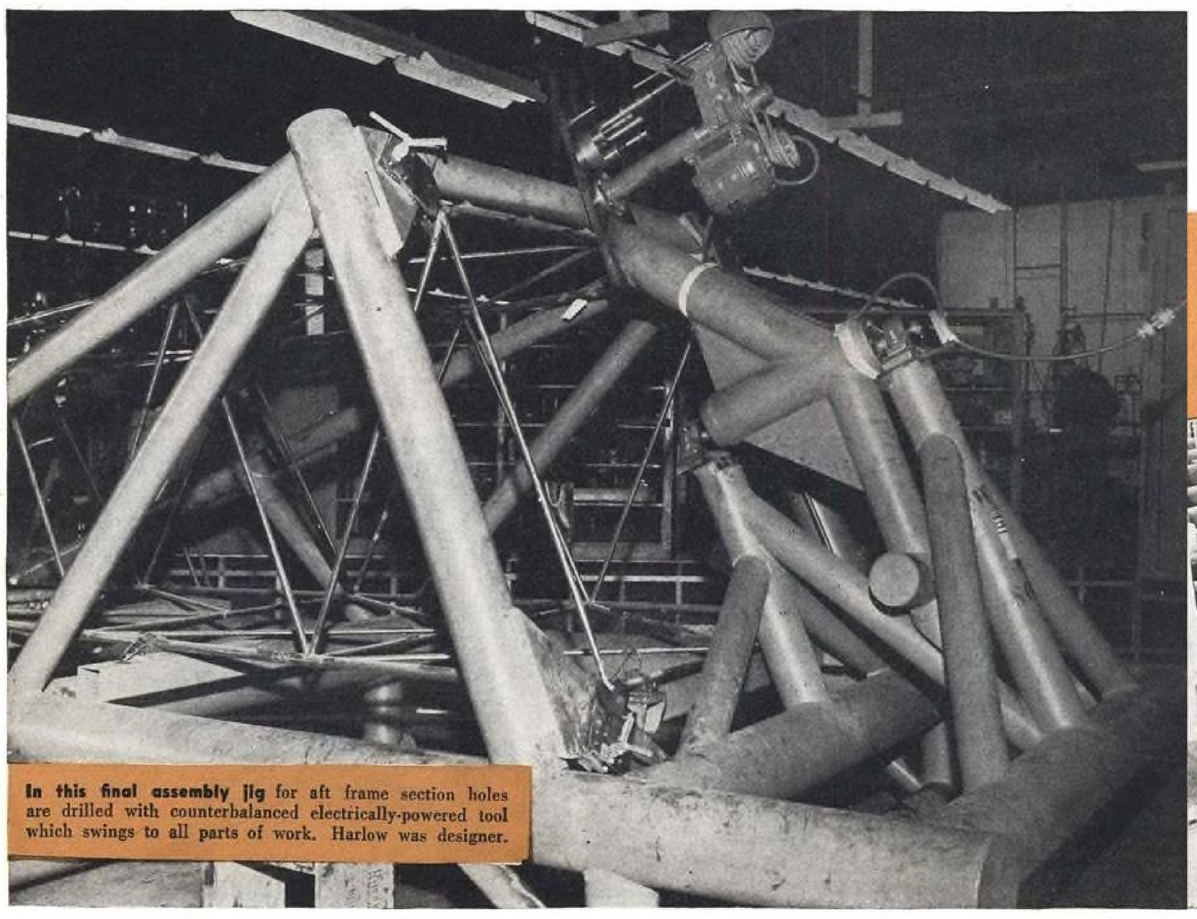

In this final assembly jig for aft frame section holes are drilled with counterbalanced electrically-powered tool which swings to all parts of work. Harlow was designer.

several kinds of metals as daily work.


Empennage assemblies and floor boards are fabricated by the Angelus Furniture Mfg. Co., one of the West's largest manufacturers of household furniture. The Los Angeles Period Furniture Co. makes wing ribs and fuselage fairings. The Kassen Co. makes floor boards. Harlow Aircraft Co., peacetime manufacturer of small planes, turns out fuselage frames and fittings.

The Metal Products Engineering Co. produces control columns, and the Essick Machinery Co. works on fuselage frames and fittings. Jigs are being made for the other associates by Crown Craft Corp., specialists in such work.

Being an associate, rather than a subcontractor, each of these concerns has an assured, continuing place in the program. For that reason each is continually improving its techniques and developing new equipment for doing the job better and faster. Because it does not have to hedge against a possible loss of contract, it willingly and continuously invests in improved facilities.


At the Weber plant, for example, large two-level vertical jigs were designed and built for constructing inner and outer wing sections. After continued use confirmed the efficiency of the design, the tooling department constructed a number of them. Some are still being installed, although others have been in production for many months.

These jigs are arranged in pairs, with work stands between and mobile stands on the outside. The latter roll out of the way when work is to be done below the floor level of the stand, or when completed sections are to be lifted from the jigs.

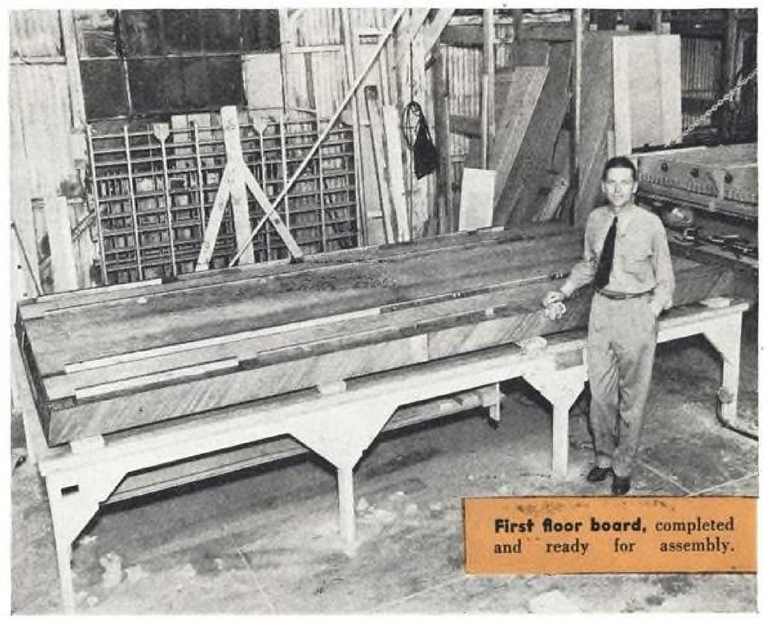


First floor board, completed and ready for assembly.

Considerable ingenuity was displayed by the Weber organization in developing several pieces of its special equipment. Because the 8 hrs. normally required to harden glue on plywood reinforcements around inspection holes caused a bottleneck, Weber engineers recovered a discarded jigsaw frame from a junk pile, equipped it with an air cylinder and two electrically heated plates, did the timing with an ordinary kitchen-stove clock—and slashed drying time from 8 hr. down to 45 min. Weber engineers also scoured the junk yards and got scrap iron and steel for

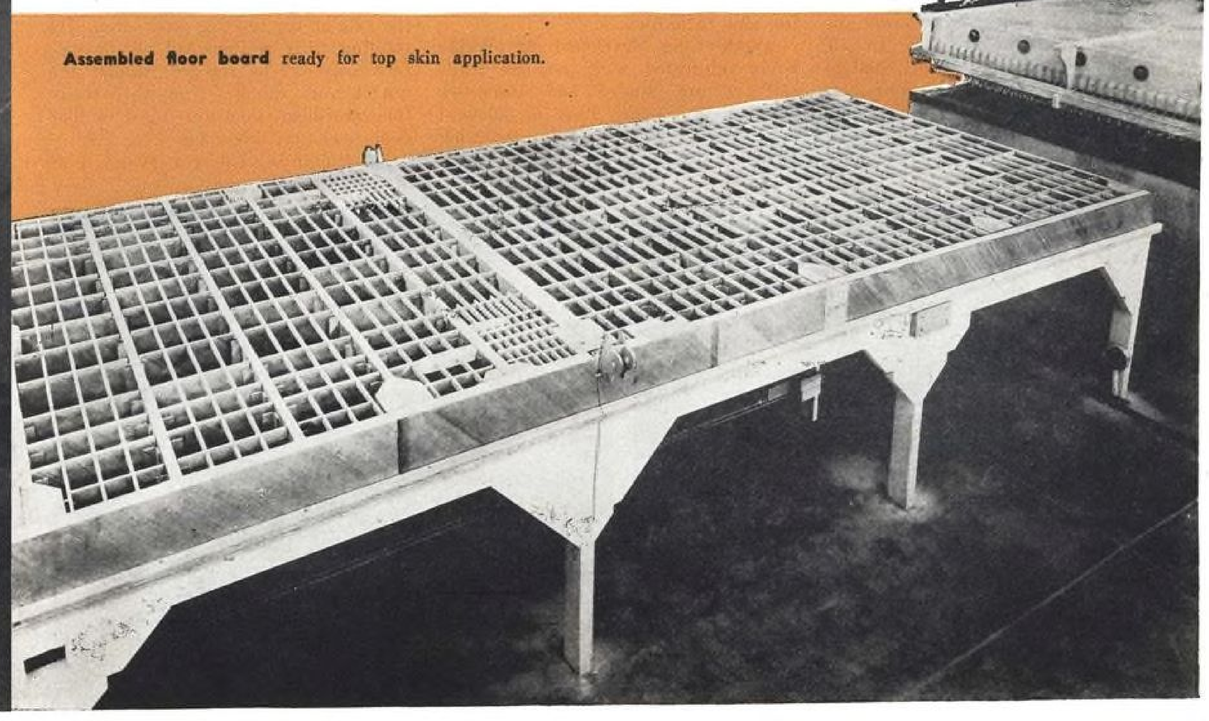

Assembled floor board ready for top skin application.

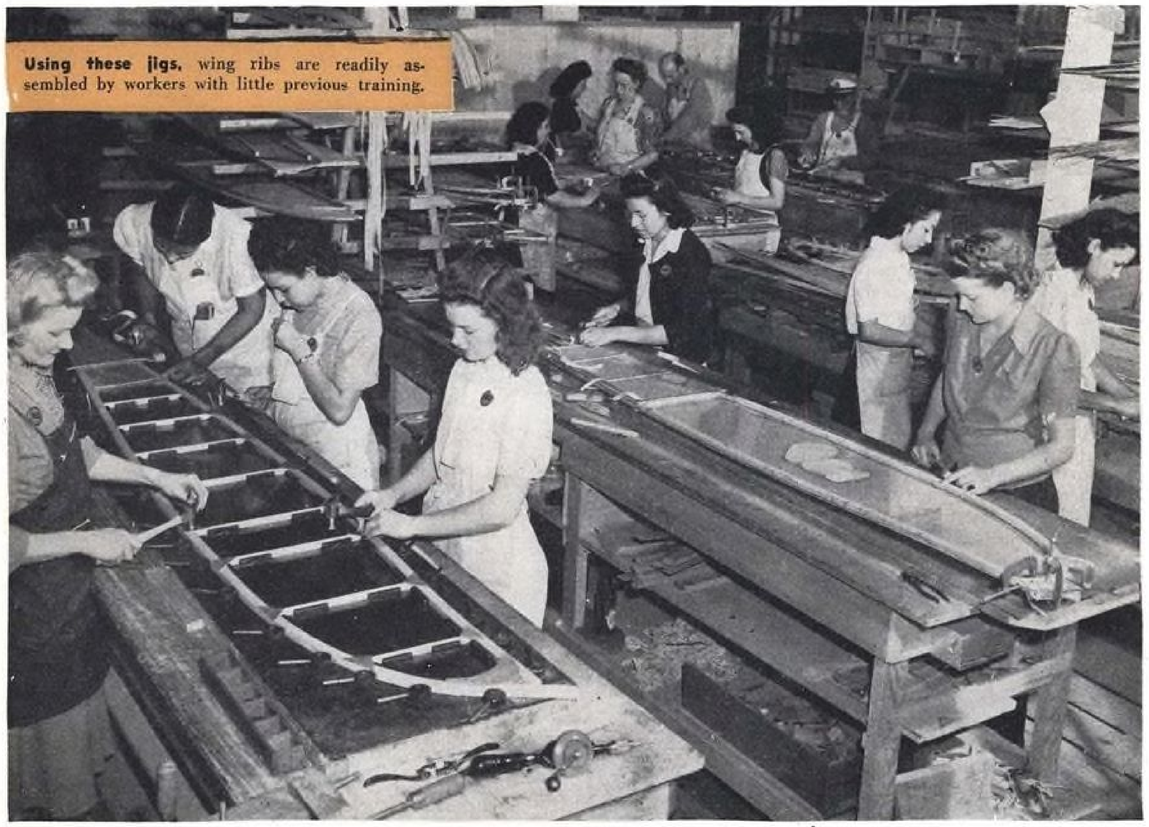

Using these jigs, wing ribs are readily assembled by workers with little previous training.

construction of a spar cap profiler that in three cuts completely profiles the four-dimensional thickness of this part. Also standard quick-acting cam or "C" clamps, commonly used in all wood working shops, were attached to the bottom of a spar jig by hinges so that they swing downward and out of the way while loading or unloading the jig. They quickly can be swung into place and tightened, at the proper places, when needed to clamp a spar together for the several hours required for glue to harden.

Another jig developed by Weber holds fabricated wing sections while surfaces are sanded and inspected. Mounted on casters, it is so balanced that one worker can revolve the wing section (on a longitudinal axis) to any desired position and lock it by merely inserting a pin through holes provided for that purpose in a disk attached to the axle of the rotating mechanism. By rotating wing sections, all of the surface area can be reached without the use of work stands. And when ready for varnishing, they are rolled to that department on this stand.

Experience in welding of tubing, plus the assured stability its associate producer status provided, spurred the Harlow Aircraft Co. to design jigs and welding equipment that has put fabrication of the fuselage frames on a smooth-flowing mass-production basis.

All jigs in the Harlow plant were designed by that company's engineers, and they are of the rotating type wherein assemblies can be revolved 360 deg. and instantly locked in any position desired by the welder. Welding gas is piped from a central source, under proper pressure, to each working station. Drop pipes equipped with valves and gages bring the gas to a point nearest to the working position. Hence, hoses to torches need not be long and therefore likely to get in the way of the welder.

As in all mass production, the Harlow system begins with small subassemblies that progress through a procession of jigs until a completed fore or aft fuselage section frame results. These are then prepared for joining in a rather novel jig which not only permits additional welding together of a section but also accurate spot facing and drilling of bolt holes in attachment fittings. Fore and aft frames are not actually joined until all assembly and installation is done in our Timm plant.

For a large-volume source of wing ribs affording direction by men experienced in the rather delicate type of fabrication required for these wooden pieces, we secured the Los Angeles Period Furniture Co.—a concern which has had many years of experience in solving the manufacturing problems inherent in producing a large variety of such furniture pieces. Selection of this company has resulted in a system of assembling ribs (from pre-formed cap strips, nose blocks, verticals, and gussets in jigs) that takes most of the skill requirements out of the job, hence it can be done by women and girls with very little training.

Nose fairings, another part produced by this firm, are fabricated over an actual nose section frame, used as a jig, from which they are removed when completed. Tail cone assemblies are still another rather delicate type of structure produced by this plant.

The Timm portion of this system—final assembly—is carried out under somewhat greater difficulties than are encountered by our associates. This is because of our decision to locate the final assembly line as near as possible to the geographic center of the associates' plants. However, the plan reduces transportation needs, and it has worked out very well, despite the fact that the only available building was not perfectly suited to our needs.


While adequate floor space was available, it was badly cut up by pillars and




Nose sections are built over frames by L. A. Period Furniture Co.




Closely fitted tail frames are also made by this furniture company.

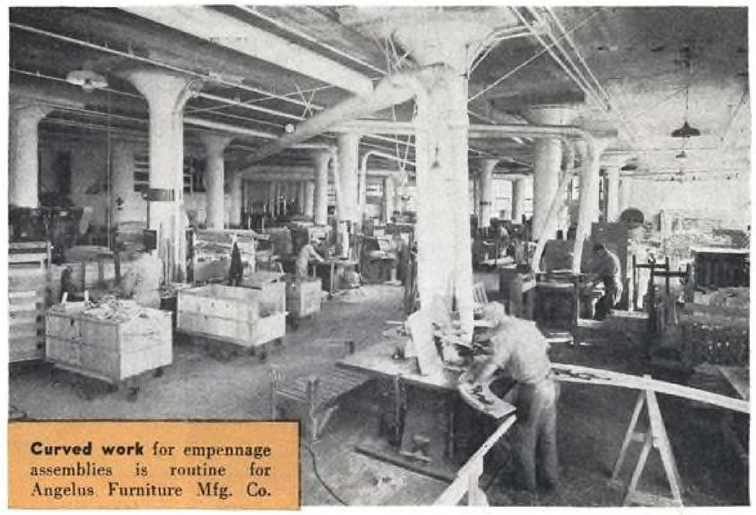

Curved work for empennage assemblies is routine for Angelus Furniture Mfg. Co.

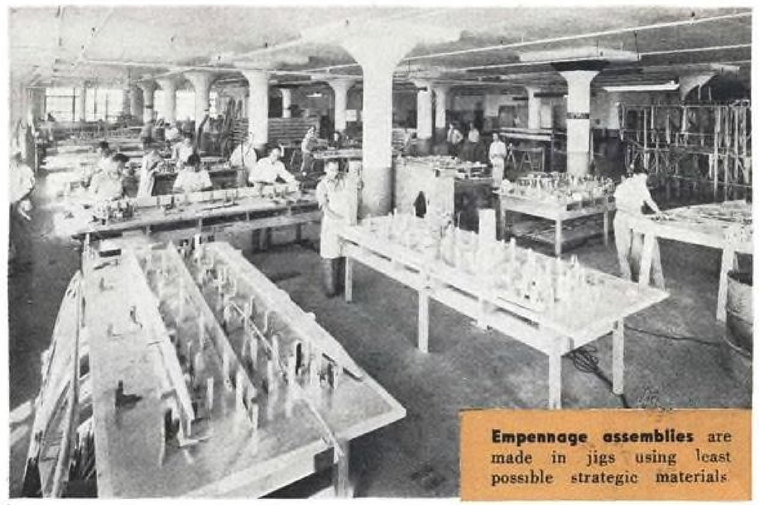


Empennage assemblies are made in jigs using least possible strategic materials.

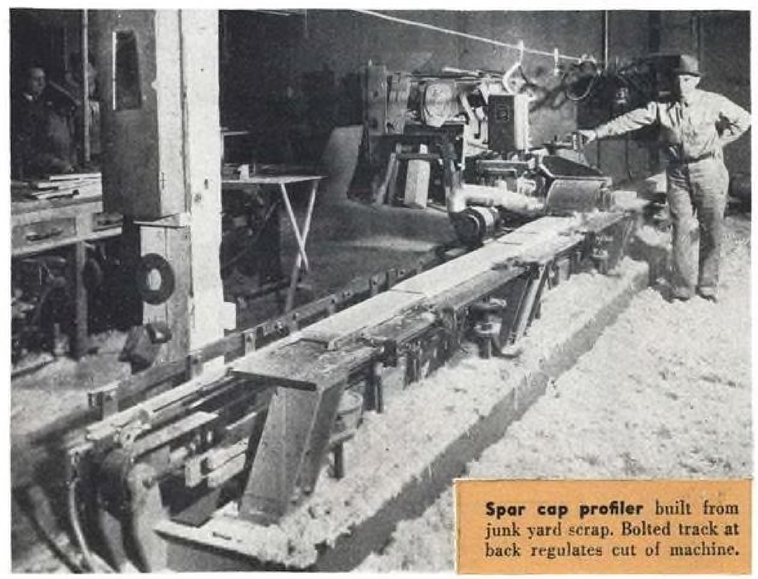

Spar cap profiler built from junk yard scrap. Bolted track at back regulates cut of machine.



Ordinary adjustable clamps are hinged to underside of spar jig, insuring speed and accurate spacing.

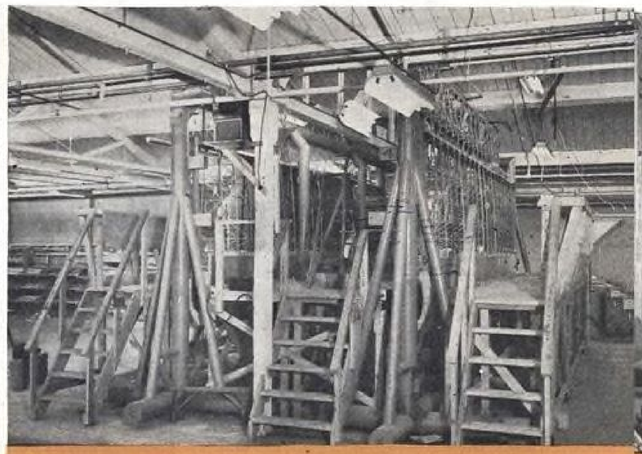

Inner wing panel jigs by Weber permit work on both sides of wing. Leading edges are prefabricated and placed in jig.



Los Angeles Ladder Co. turns out skids by the processes similar to those formerly used for peacetime products.



This sander had a long peacetime history before it was put to work on glider parts by L. A. Ladder Co.

partitions that could not be removed. This necessitated jogs in our assembly line. But in spite of these, our production staff has adapted this building so well that we have readily held up our end. And in addition to assembly, we have established a welding department for fabrication, in a secondary capacity, of frame structures.

Prefabricated frames are placed on castered dollies upon arrival and are then stored adjacent to the head of the assembly line. After inspection they move to the line and begin the trip through 32 stations of this plant prior to being transported, virtually complete, to our "Station 33," located in a hangar building at the airport. There the wing sections, delivered direct from the Weber plant, are joined; and after final inspection, the completed glider is test flown and "sold" to the Army Air Forces. In some instances we crate and ship the gliders rather than fly them away.



Two electric heater plates, a junked jigsaw frame, a kitchen-stove timer, and a home made cylinder form this reinforcement drying machine. It cuts gluing time from 8 hr. to 45 min.

The handling of the fore and aft fuselage sections on our assembly line was a fairly simple matter up to the point where they reached the joining stage where empennage sections had to be added. Here, ceiling clearances posed a tough problem. However, our engineers solved the puzzle. The building, as mentioned before, had been a warehouse and had a row of big, arched loading doorways along one wall. Outside of these we built a temporary addition high enough and of sufficient width to permit all phases of empennage addition work. Then our stations were so arranged that aft fuselage sections, already joined to the force section, extend through these arched doorways while empennage work is in progress. These assemblies are then removed while the now-completed fuselages are being transported by trucks to "Station 33" at the airport.


One floor of our Timm plant is devoted to storage of reserve stocks of completed components. By bringing them to the assembly building they serve as a reservoir which keeps the "pressure" on our line constant and at the same time eliminates the need for large storage space in associate plants. This feature is particularly appreciated by the associates because all of them are engaged in other war production work, hence they need full floor space for fabrication and the usual raw material storage.

As we see it, after what we believe is a fair test, the associate producer system has many advantages to recommend it. We would say the principal one is the stability it creates among all participants. Each concern in this group, being more than merely a subcontractor, naturally shares to a greater extent in the responsibilities of the whole project. The place of each is not subject to change as might be the case with a differing set-up. And being associates, we all draw upon one another for help if and when it is necessary.

We believe that because each associate is an established, successful concern in its own right, with skilled management on the job in its own plant at all times, this system eliminates lags and many mistakes.

Under the associate producer system, full and final authority is always on tap in each of the component plants. Instead of going out and locating, altering, and equipping several more or less temporary plants grouped around the main, central factory, we established one more or less temporary central plant and kept our fabricators in their own buildings.

There is in this system still another advantage which we cannot, of course, prove by citation but which it has been our observation exists nevertheless. That is friendly rivalry. Every plant in this group has done and is continually doing

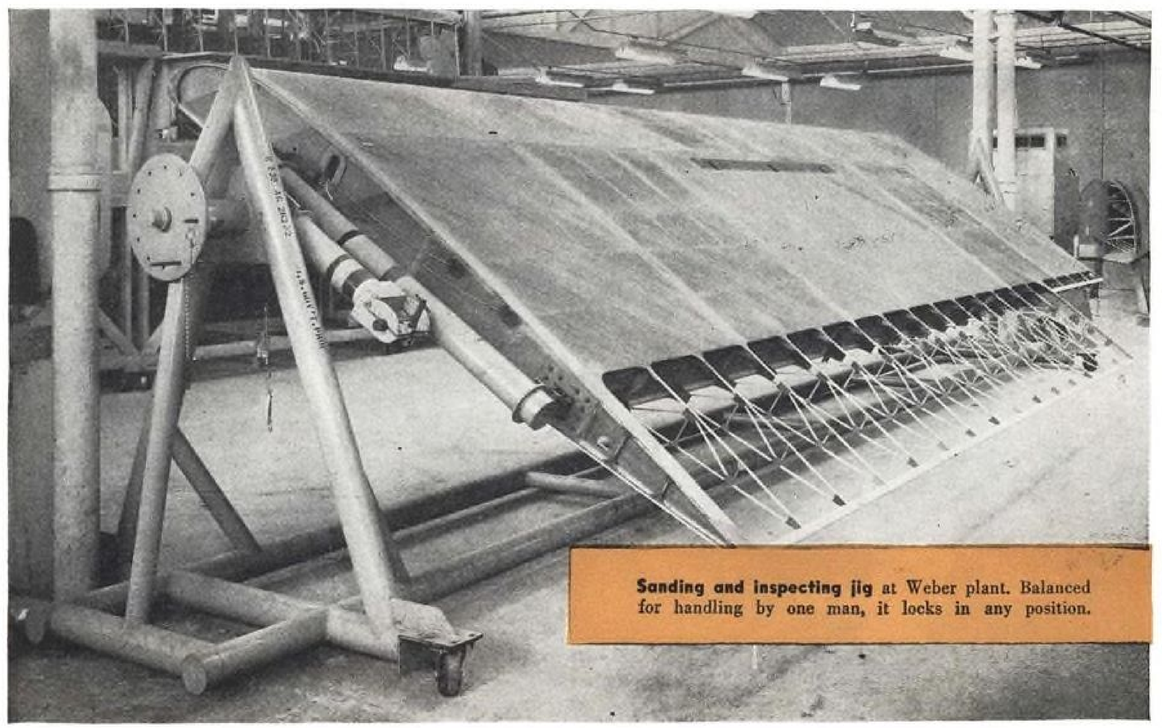

Sanding and inspecting jig at Weber plant. Balanced for handling by one man, it locks in any position.



Ladders of yesterday are piled alongside as workers of today turn out glider skids.




Entire floor of assembly warehouse is used to store finished components. By keeping them at central plant, "pressure" is maintained on final assembly lines, and space is saved at associate plants.




Rear fuselage installations are moved by hand, being light in weight.

all in its power to smooth out and speed up its own portion of the project. We all feel we are "in" on something direct and important in the war effort, also that our experience as associate producers may contribute something new that will be of value both during and after the war. Moreover, we are enjoying working together because we so thoroughly understand the over-all picture of what we are doing.


Our associate producer does not feel he is merely fulfilling a contract that may not be renewed next month. Indeed, he will tell you that he is doing more than making parts, emphasizing that he is contributing a share in one big job, according to his own experience.

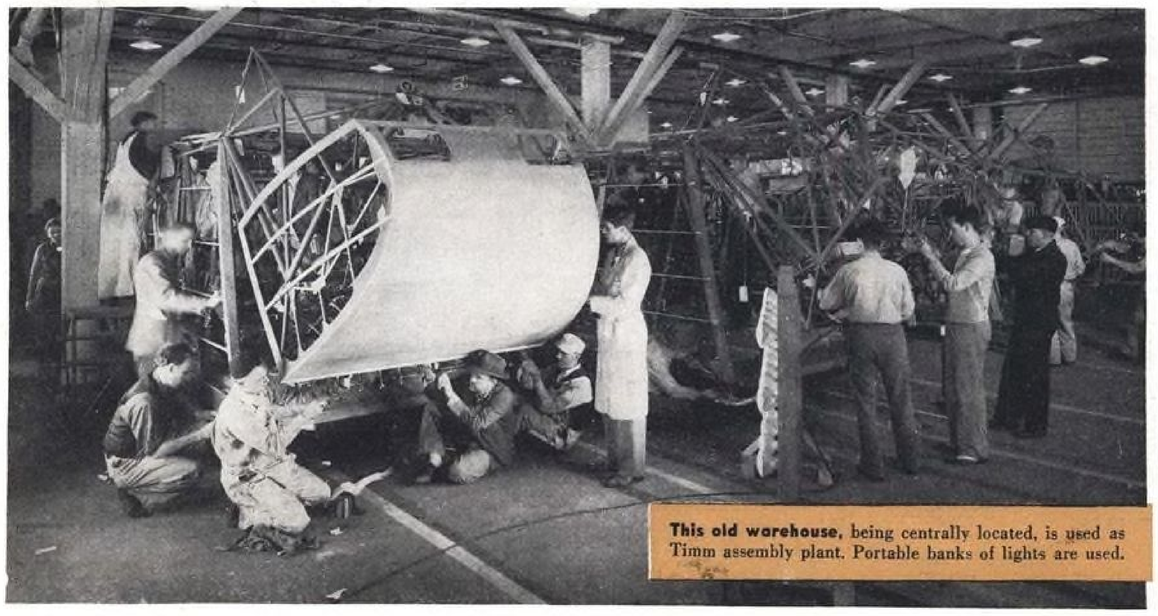

This old warehouse, being centrally located, is used as Timm assembly plant. Portable banks of lights are used.

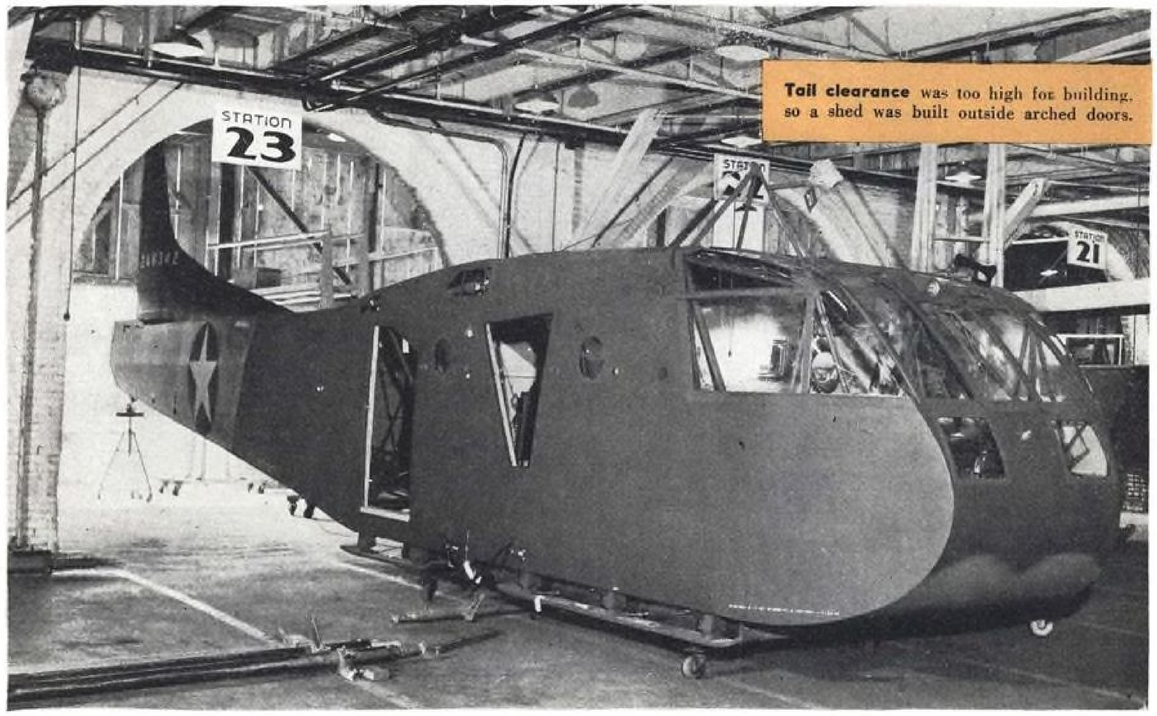

Tail clearance was too high for building, so a shed was built outside arched doors.

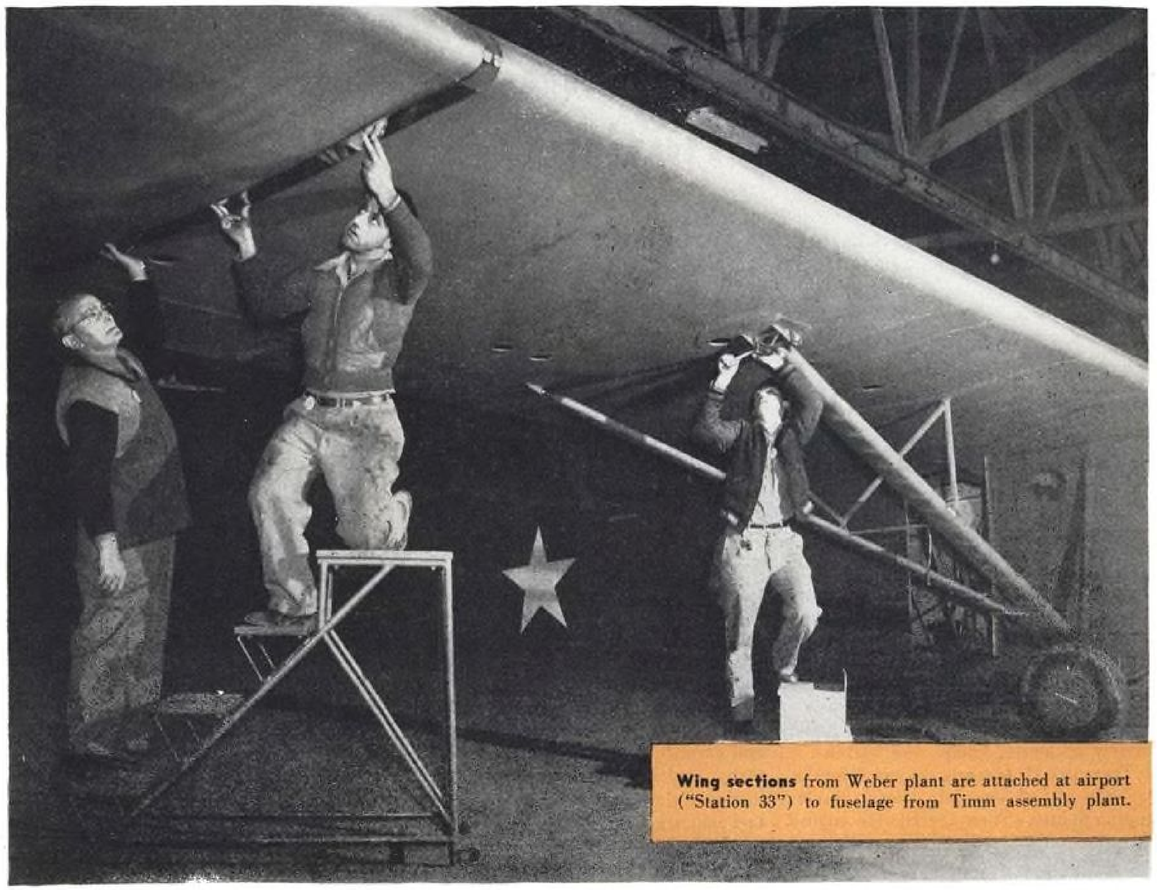

Wing sections from Weber plant are attached at airport ("Station 33") to fuselage from Timm assembly plant.

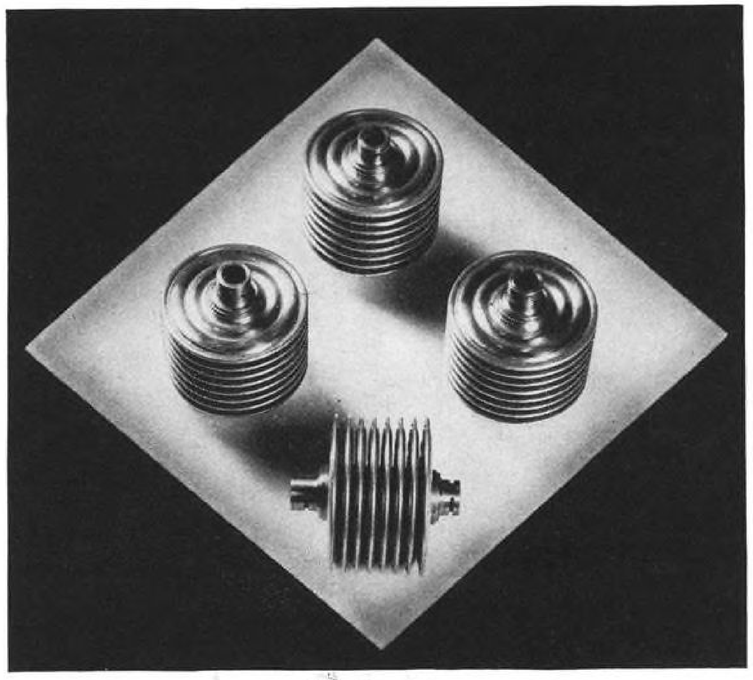


Fig. 1. Evacuated capsule used in Simmonds-Hobson automatic engine controls.

Engine Control Achieves Simpler Piloting

By **WILLIAM J. MORRISON**

Chief Field Engineer, Simmonds Aerocessories, Inc., and

A. P. FRAAS

*Author, "Aircraft Power Plants"**

Moves to ease the modern flyer's multiple job of dial-watching are primary, hence the marked significance of the Simmonds automatic power plant control. Described are the development and operation of this integral device which frees the pilot for other duties.

IT SEEMS GENERALLY AGREED that the pilot of a modern airplane powered with a highly supercharged engine has too many things to look after. Not only must he operate the control stick and rudder pedals to fly the airplane, but he must watch an impressive array of instruments, and manipulate a wide variety of levers, knobs, and buttons.

There are 13 separate control levers in the cockpit of one late model single-engine fighter. These include the engine throttle, mixture, and supercharger clutch controls, the propeller governor control, levers operating the cowl flaps, carburetor air heater valve, oil cooler shutters, the fuel tank selector valve, the wing flaps, and the landing gear retracting mechanism.

Of all these, the engine controls require by far the most frequent attention and careful adjustment. In spite of the many evident advantages of an automatic engine control, American pilots and manufacturers have been reluctant to add yet another complicated device to the airplane. However, the widespread and successful use of automatic engine controls in both British and German military airplanes in the past few years, together with the growing complexities of airplane operation, have changed this picture to the extent that Simmonds Aerocessories has been in quantity production of automatic engine controls for more than a year. The company is working under a license agreement with Hobson & Components, Ltd., of England, a firm which is a leader in this field.

* McGraw-Hill Book Co.

Engine Operating Characteristics

First step in approaching the problem of automatic power control is a consideration of the factors limiting the power which an engine may be called on to deliver. There are three types of limitations. Light weight engines may be limited by the mechanical strength of parts so that the full amount of power which might be obtained must be restricted. A second type of limitation is imposed by the capacity of the engine to develop power—for example, it is often impossible at high altitudes to provide the engine with enough fuel-air mixture. The third type of limitation results from the power absorption and efficiency of the propeller.

Maximum speed and rate of climb of an airplane can be obtained only if the engine is operated at the maximum permissible power output. This means that the throttle must be opened continuously to maintain a constant manifold pressure in a climb from sea-level to the altitude at which the throttle is wide open, i.e., the critical altitude of the engine. Similarly, in a descent, the throttle must be continually moved toward the closed position to avoid excessive manifold pressures.

In practice, of course, the pilot makes intermittent adjustments so that in a climb he ordinarily obtains less than the rated power output, and in a descent he is likely to endanger the engine if he neglects to throttle to a safe manifold pressure. Adjustments should not be made roughly; proper control requires a skilled hand and the close attention of the pilot during the adjustment.

Function of Auto-Controls

There are degrees of automatic engine control. All larger engines are fitted with propeller governors to maintain a constant propeller rpm.—to guard against the prime danger of overspeeding the engine with changes in flight altitude and also to relieve the pilot of a great deal of control adjustment which would otherwise be necessary. Since the rpm. is satisfactorily held constant by the propeller governor, the power output can be maintained at a constant value by an auto-control designed to maintain a constant manifold pressure, except for the negligible variations due to altitude-pressure changes.

An additional requirement is that it is essential that any auto-control be connected between the pilot's throttle lever and the engine, in such a way that the pilot can obtain simple mechanical control even if the automatic portion of the mechanism should be damaged.

Auto-Control of Manifold Pressure

Although different models of the company's automatic controls vary considerably in complexity and construction, some basic features are common to all types. The controlling element in each unit is an evacuated capsule, such as that shown in Fig. 1. These are made of a stack of diaphragms soldered together, evacuated, and sealed. An outstanding characteristic is their fatigue strength, for of the many thousands which have been in service with the RAF for the past seven years, not one instance of failure has come to our attention. In all units, the capsule operates a valve which supplies oil to a servo piston. The servo piston operates a member of the throttle linkage.

Earliest type in this series of automatic engine control provides such control only for manifold pressure or boost. Schematically shown in Fig. 2a, this unit is arranged so that a cam is linked to the pilot's throttle control lever. As the latter is closed, the cam rotates to

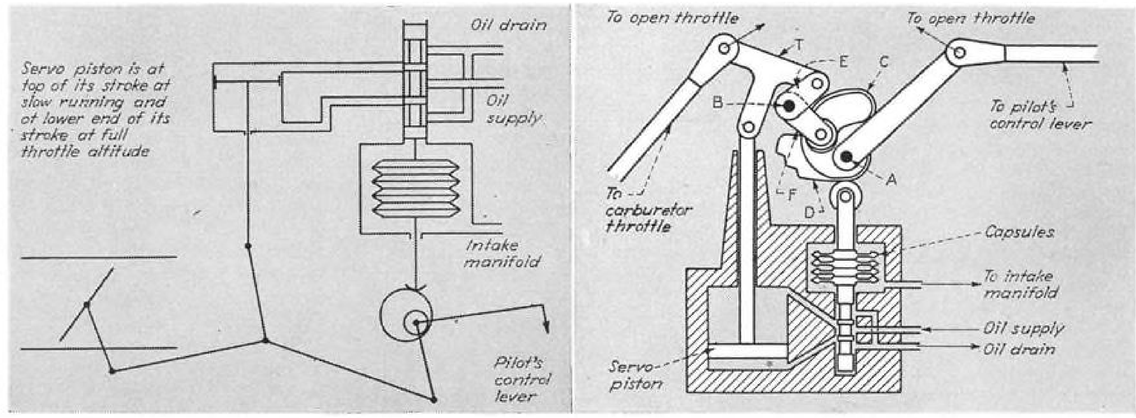
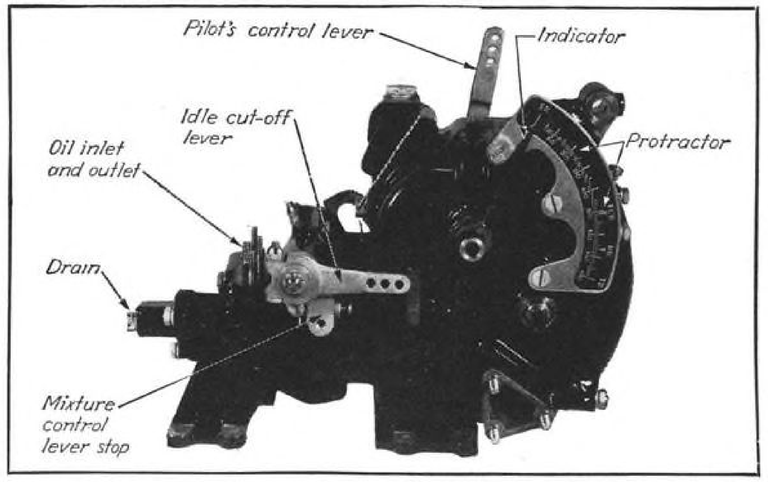


Fig. 2a. Schematic diagram of earlier type automatic engine control for boost only. **Right: Fig. 2b.** Schematic diagram of current Simmonds-Hobson automatic engine control showing throttle control mechanism. Shafts shown in solid black do not turn.



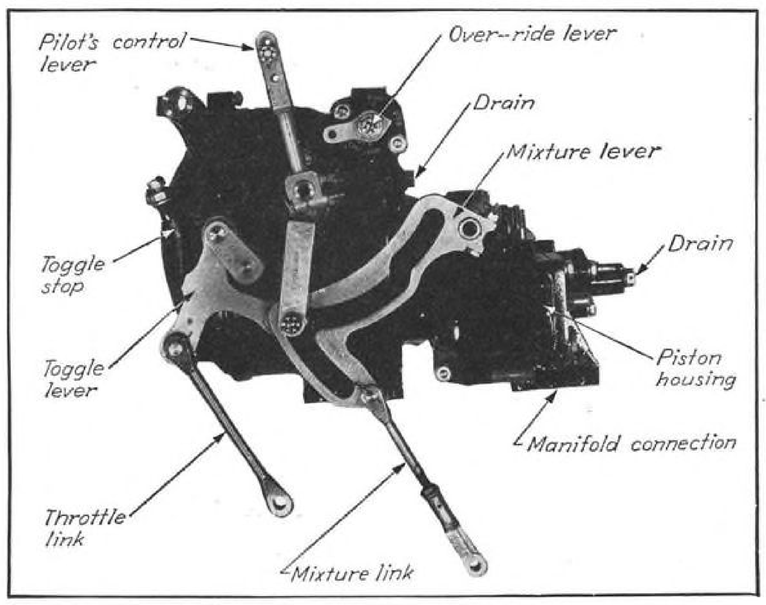


Fig. 3. Simmonds-Hobson automatic engine control which regulates both manifold pressure (boost) and mixture.

Fig. 4. Reverse side of control shown in Fig. 3.

move up the bottom end of the capsule. One end of the capsule is attached to the valve so that it is also moved up and oil under pressure is ported to the topside of the piston, causing it to move downward. Drain passages are provided as shown around the valve in Fig. 2a, and the capsule chamber is vented to the intake manifold.

If the end of the capsule is set to a particular position, the unit will maintain the manifold pressure to a constant value corresponding to that position. For, if the manifold pressure exceeds the equilibrium value, the pressure in the capsule chamber will rise, the capsule will contract, draw the valve up, and supply oil to the topside of the piston. The piston will move downward, closing the throttle valve until the manifold pressure drops sufficiently to allow the capsule to expand and push the valve to the equilibrium position.

"Hunting" is avoided by adjusting the width of the valve lands and the piston diametral clearance to values which permit an appreciable oil flow. (The pilot would still have mechanical control over the engine, if the unit were damaged by gunfire.)

Auto-Boost and Mixture Control

Experience with the simpler type control described above showed the desirability of giving the pilot a throttle control lever which he could set for takeoff, rated, or maximum cruising manifold pressure immediately without watching his instruments. Of course, it should also be possible for the pilot to obtain any manifold pressure intermediate between these values. To simplify installation and maintenance, the control should be a self-contained unit which can be adjusted and accurately set on a test bench so that for every position of the pilot's throttle control lever the unit would maintain a particular manifold pressure.

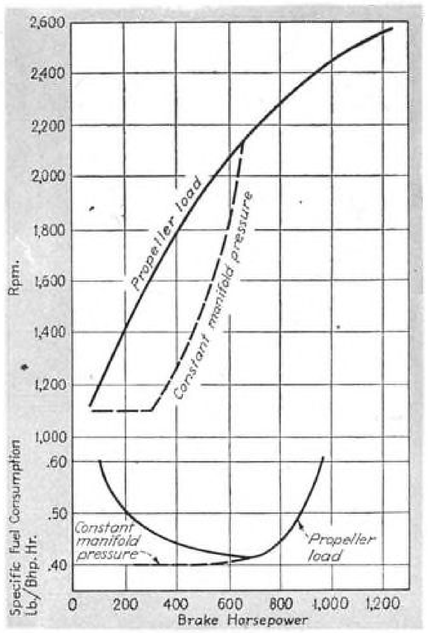


Fig. 5. Specific fuel consumption and rpm. as function of power output for both propeller load and constant manifold pressure operation.

A second type automatic engine control was developed to meet these requirements. The schematic diagram in Fig. 2b shows that the basic capsule, valve, and servo piston are again employed. The pilot's throttle control lever is connected so that it rotates shaft *A*. Two cams are mounted on this shaft. Cam *C* operates lever *F* rigidly mounted on shaft *B*. Shaft *A* rotates so that, as the pilot moves his throttle lever toward the open position counter clockwise, shaft *B* rotates clockwise. The lever arm *E* mounted on shaft *B* operates link *T* to move the throttle valve toward the open position.

This arrangement gives the pilot mechanical actuation of the throttle for taxiing purposes. It also gives a relatively large quadrant movement for small carburetor throttle openings for taxiing. However, the cam is profiled to give a sea-level manifold pressure which is considerably less than that normally desired for each particular position of the pilot's throttle lever above the idle range.

The servo piston then moves upward to act on link *T* to increase the throttle opening to the desired value. The capsule and valve act in much the same general way as in the previously described unit. A second cam *D* rigidly attached to shaft *A* determines the position of the top of the capsules, and hence the manifold pressure at which they will move the valve to a neutral position. The servo piston will act to maintain this manifold pressure.

Cam *D* is made in three sections with a "dwell" between each so that in the vicinity of three positions no change in the capsule setting will occur. Thus the pilot can tell from the "feel" of his control lever when it is set to maximum cruising, rated, or takeoff manifold pressure as he moves the throttle lever from the closed to the open position.

Fig. 3 shows a view of this type control. The quadrant shown is centered on shaft *A* of Fig. 2b. It is provided to aid in checking adjustments, etc. Note that shaft positions for "economical cruising boost", "rated boost", and "takeoff boost" are marked on the protractor for shaft *A* with the letters *ECB*,

(*Turn to page* 257)

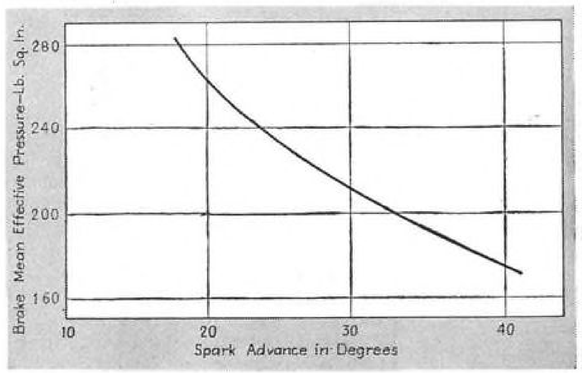


Fig. 6. Effect of spark advance on maximum b.m.e.p. with rich mixtures for a hypothetical engine. (Computed from NACA Tech. Report No. 655.)

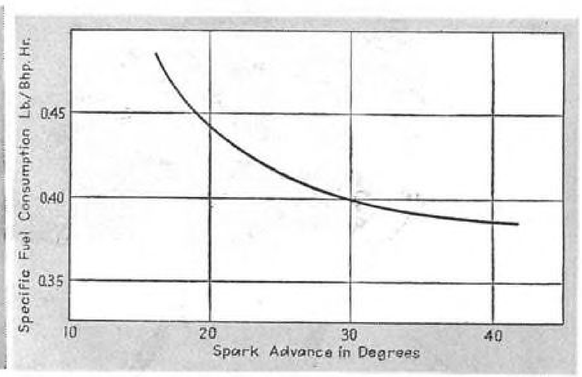


Fig. 7. Spark advance effect on best economy specific fuel consumption for engine in Fig. 6. (Computed from NACA Tech. Report No. 655.)

The B.F.Goodrich Airplane of the month

GRUMMAN HELLCAT

WATCH THE HEADLINES as the name "Hellcat" is written into the history of this war. You'll read it, and it will be good reading . . . for everyone but the Axis. For this sensational Grumman fighter—designated F6F—is our Navy's newest form of sudden death with wings. It's at home on land or on a carrier's deck. And like its famous predecessor, the "Wildcat," this new speedster will also be one of the British Navy's standard fighters.

We're proud that Silvertown Tires, De-Icers, Bullet Sealing Fuel Cells, and many other B. F. Goodrich products are helping manufacturers like Grumman make American warplanes the best in the world. To one of these planes, the Grumman "Hellcat," —our nomination as Plane-of-the-Month.

In war or peace


B.F.Goodrich

FIRST IN RUBBER

B.F. GOODRICH RUBBER RESEARCH FOR THE *Aviation industry*



HE'S SHOOTING HOLES IN A HOSE . . . TO HELP BRING OUR FIGHTERS HOME

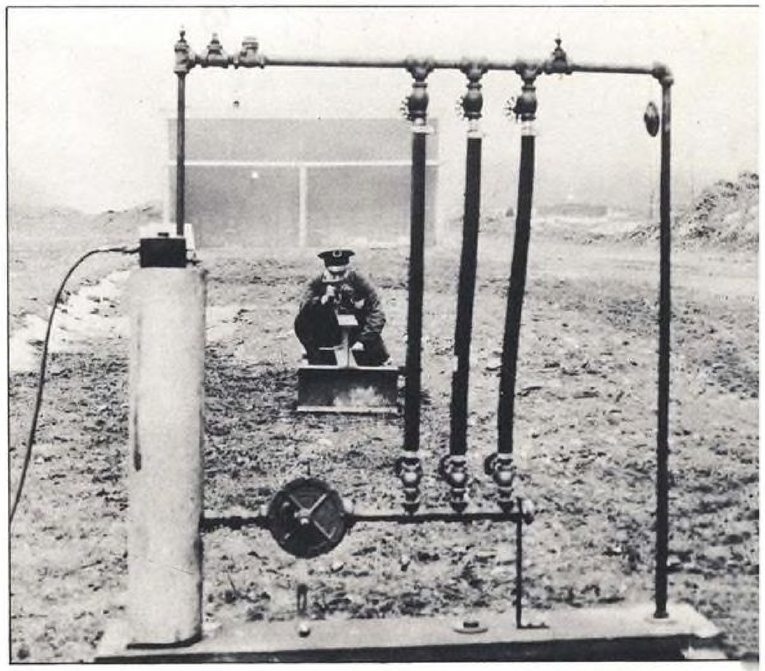

IT'S A mighty important hose he's shooting at, and it's mighty important that he score plenty of hits. For this hose is the vital link between an airplane's fuel tanks and its engines . . . a link whose failure due to bullet punctures, shell fragments, or any other cause could mean the loss of plane and crew. That's why he wants his 50 calibre bullets to hit and hit again . . . to see if the hose can take it.

And it can. This newest type of B. F. Goodrich Bullet-Sealing Fuel Hose has stood the firing tests both on the range and in combat. Time and again it has been shot up by 30's and 50's without fuel leakage. Actual cases are on record where good sized shell fragments have been found imbedded in the fuel hose of planes safely home from battle.

Back in 1941 was when B. F. Goodrich first began producing bullet-sealing fuel hose . . . following many months of development work. The original construction consisted of an Ameripol (synthetic rubber) tube, sealing layers, reinforcing plies, and an Ameripol cover. When gasoline penetrated the tube through any puncture, it caused the sealing layers to swell and thus seal the puncture.

Much research and many more developments followed, due to constantly changing performance requirements. The advent of aromatic fuel was responsible for one of the recent developments. This new fuel caused greater swelling and deterioration of the tube compound, hence construction utilizing an aromatic-resistant compound was needed. The first one developed did an excellent job of sealing at normal temperatures; but at the sub-zero temperatures encountered in arctic and high-altitude operations, its sealing effectiveness diminished.


It therefore became necessary to develop still another construction utilizing a compound that would swell enough at sub-zero temperatures to seal efficiently yet not swell so much at normal temperatures that the inside diameter would be severely restricted. A construction of this type, with a few minor changes, has been in production since early 1942.

It is interesting to note that over 300 different constructions were made up and subjected to firing tests before today's efficient B. F. Goodrich Bullet-Sealing Fuel Hose was produced. And even now, B. F. Goodrich engineers continue their research, looking for still greater sealing efficiency . . . still greater protection for our combat fliers all over the world.


MAKERS OF B. F. GOODRICH TIRES AND OVER 80 RUBBER AND SYNTHETIC RUBBER PRODUCTS FOR AIRPLANES

ARMY E NAVY
Awarded to seven plants


THERE'S AN EFFICIENT B. F. GOODRICH HOSE FOR EVERY AIRCRAFT APPLICATION

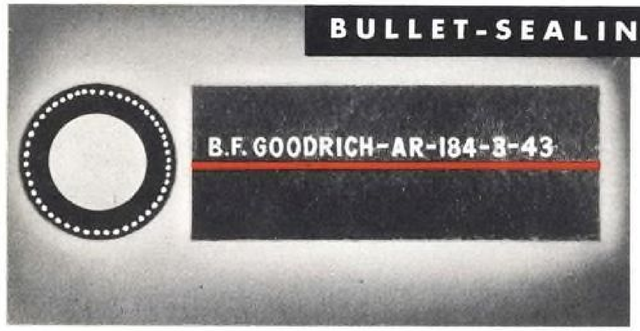

SCHEMATIC CROSS SECTION drawing of basic elements and side view showing identification markings. Designed for maximum sealing efficiency, this hose meets latest Army and Navy requirements and is approved for Army and Navy aircraft.

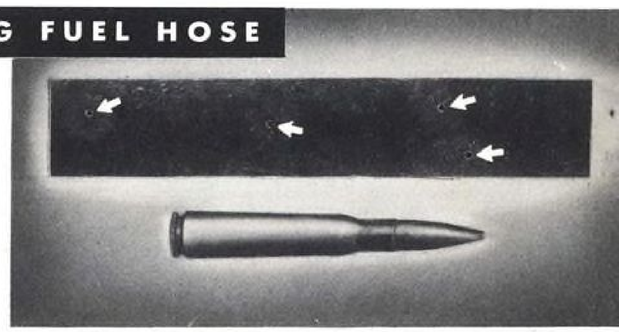

HERE'S PROOF of sealing efficiency: Although this small section of hose was punctured four times by .50 calibre machine gun bullets (shown in same scale below) it held fuel under 10 to 15 pounds pressure without leaking.

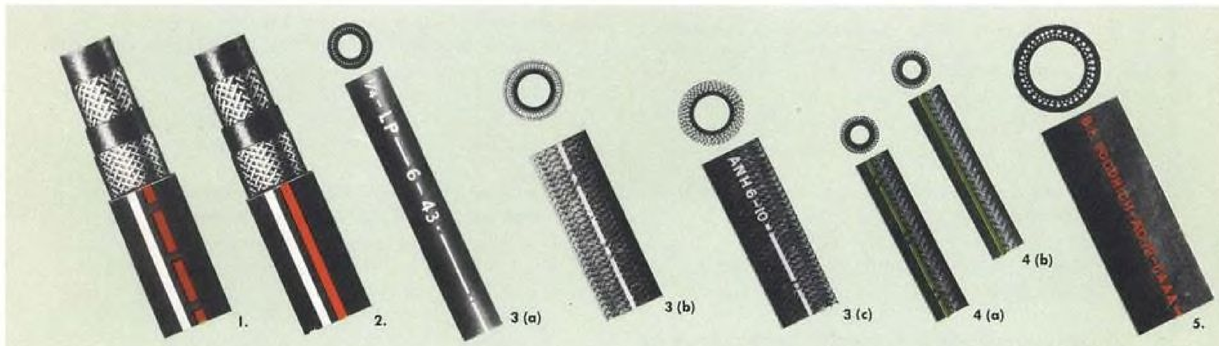

ALL B. F. GOODRICH HOSE CLEARLY MARKED FOR QUICK IDENTIFICATION

1. AIRCRAFT HOSE: All-purpose hose suitable for fuel systems. Meets latest revisions of Army-Navy specification AN-ZZ-H-456A. Identified by one broken red and one solid white stripe.

2. OIL AND COOLANT HOSE: Made with new Neoprene compound to meet coupling conditions encountered in oil and coolant service. Otherwise similar to (1) above. Solid red and solid white stripe.

3. (a, b, c) **HYDRAULIC AND INSTRUMENT HOSE:** (Note: This group compounded for use in working conditions as low as –70° F. Identified by code ·–·– as B. F. Goodrich low temperature resistant.)

(a) **SPEC. ANZZH626A LOW PRESSURE INSTRUMENT HOSE:** For use on air, hydraulic, low pressure and fuel lines up to 40% aromatic.

(b) **SPEC. ANZZ623A HIGH PRESSURE HOSE:** Available both in synthetic and braided cover.

(c) **SPEC. ANH6a MEDIUM PRESSURE HOSE:** Air Corps standard for both medium and high-pressure service.

4. OXYGEN BREATHING HOSE: (a) Low Pressure—broken green stripe; (b) High Pressure—solid green stripe.

5. FIRE PREVENTIVE HOSE: For use ahead of engine fire wall in commercial planes. CAA-approved. Aromatic-resistant.

NEW DATA SHEETS AVAILABLE: Contain the facts you'll want (sizes, thicknesses, weights, lengths available, etc.) on the complete line of B. F. Goodrich Airplane Hose. For your free copy, write today (on company letterhead, please) to The B. F. Goodrich Company, Aeronautical Division, Akron, Ohio.

In war or peace
B.F.Goodrich
FIRST IN RUBBER



GEORGIE GREMLIN WASHED OUT ON THIS

DE-ICER SERVICE QUIZ

CAN YOU SCORE 100%?

Complete the ten statements by simply picking the one correct part (a, b or c) following each numbered statement. See if you can get them all.

1. During every preflight inspection, De-Icers should be checked for punctures, loose patches and for freedom from oil because . . .

a. The crew chief says so.
b. Punctures admit too much sunlight.
c. It insures successful operation.

2. Soapstone or talc is applied between the De-Icer and wing skin . . .

a. To act as an insulator.
b. To fill in cracks.
c. To act as a lubricant.

3. Any oil found on De-Icers should be removed as soon as possible with a neutral soap and water solution because . . .

a. De-Icers don't need outside lubrication.
b. Oil is extremely harmful to rubber.
c. Someone might slip and break his neck.

4. If any damage to the De-Icer—large or small—is discovered . . .

a. Find out who caused the damage.
b. Make sure the hydraulic system is full.
c. Ground plane until De-Icer repair is made.

5. Except in emergencies, the standard B.F. Goodrich De-Icer Repair Kit should be used for surface breaks whose length is . . .

a. Three-quarters of an inch or less.
b. Three inches or less.
c. Five inches or less.

6. Only the materials in the B. F. Goodrich De-Icer Repair Kit should be used because . . .

a. De-Icers must be repaired with specially compounded rubber.
b. These materials are gremlin-proof.
c. Other materials are more expensive.

7. Whenever possible, a vulcanized repair is best for large surface breaks because . . .

a. A vulcanized repair uses less rubber.
b. It is stronger, neater and lasts longer.
c. It can be done quicker.

8. Adhesive tape is applied to the underside of each fairing strip's trailing edge to . . .

a. Prevent marring the skin of the airplane.
b. Carry inspection data.
c. Show manufacturer's code number.

9. For most efficient operation, the De-Icer pressure gauge should read 8 lbs. per sq. in. because . . .

a. This pressure keeps the plane balanced.
b. This pressure keeps oil flowing freely.
c. This pressure is necessary for proper inflation of the tubes without danger of rupture.

10. A complete cycle of De-Icer inflation should take approximately 40 seconds because . . .

a. Perfect timing shakes off chisel-jawed gremlins.
b. A 40-second cycle permits ice to form and be cracked off most efficiently.
c. A faster cycle might cause wing flutter.

WHAT IS YOUR SCORE?

Each correct answer counts 10. 1-c, 2-c, 3-b, 4-c, 5-a, 6-a, 7-b, 8-a, 9-c, 10-b.

FREE! Pocket-size booklet on De-Icer Servicing and Installation! Every trainee and instructor who works with De-Icers will want a copy of this interesting and informative booklet. Completely illustrated with step-by-step drawings, it shows the correct procedures for removing, repairing, storing and re-installing De-Icers. For your free copy of "De-Icer Service and Installation," write today to the B. F. Goodrich Company, Akron, Ohio.

B. F. GOODRICH, AERONAUTICAL DIVISION, AKRON, O.

Skyway or Highway

B.F.Goodrich

FIRST IN RUBBER

Prescriptions for Head Cracks In 24ST Rivets

By E. C. HARTMANN, C. F. WESTCOAT, M. W. BRENNECKE

Aluminum Research Laboratories

Laboratory tests of strengths, corrosion resistance, heat treatments, and aging of rivets give a five-point guide to new efficiencies in their employment in aircraft.

RIVETS of 24ST aluminum alloy used in the construction of aircraft, are especially employed in highly stressed parts, because they are the strongest of the commercial aluminum alloy rivets. They are, however, the most difficult to drive. Rivets of this alloy age-harden rapidly at room temperature after heat treatment and consequently become more difficult to drive as the interval of room temperature aging between heat treatment and driving increases. Therefore, the rivets should be driven promptly after heat treatment, or they should be refrigerated immediately after heat treatment to retard aging, then driven promptly after removal from the refrigerant.[1]




[1] B. J. Fletcher, Refrigerating Aluminum Alloy Rivets and Parts, p. 1178, *Metals and Alloys*, June '43.

Although these procedures are usually closely followed in practice, cracks sometimes develop in the driven heads, resulting from the fact that the rivets have only a limited capacity to withstand plastic deformation without rupture, even when handled under ideal conditions. When this limited capacity is further decreased by excessive room temperature aging or faulty heat treatment, the amount of upsetting that the rivet will withstand may be less than that required to form the desired size of driven head. The cracks extend radially into the head and usually are inclined to the surface of the sheet. Because the two edges of the crack appear to have slipped or "sheared" over each other, head cracks of this character are often referred to as *shear cracks* to distinguish them from the less common radial splitting of the head sometimes resulting from a seam or other longitudinal defect in the wire, from quench cracks that occur in overheated material, or from the cracking that is associated with grain boundary melting. Shear cracks, rather than the other types of cracks or splits, are the subject of this article.


Head cracks may vary widely in size, from those which are invisible without the aid of a lens to those which are plainly visible to the most inexpert eye and which seriously disfigure the rivet head. A wide range in degree of cracking was observed in the tests to be described. Fig. 1 shows cracks classified as severe which are plainly visible even after a coat of paint has been applied to the rivet head. Cracks even more pronounced than these were obtained in some of the specimens.

When head cracks in driven rivets are found in airplane structures, the rivets are often rejected, drilled out, and replaced by new rivets. This procedure is costly, time consuming, and of doubt-

TABLE 1—Effect of Cracks in Driven Head on Static and Fatigue Strength of 1/2-in. 24ST Rivets.

Type of test	Type of specimen		Rivets Without Head Cracks: Number of tests	Rivets Without Head Cracks: Average load per rivet at failure, lb.	Rivets Without Head Cracks: Average strength,* Psi.	Rivets With Head Cracks: Number of tests	Rivets With Head Cracks: Average load per rivet at failure, lb.	Rivets With Head Cracks: Average strength,* Psi.
Static tension			4	908	68,800	15	929	70,100
Static shear			9	581	44,500	12	618	47,300
Shear fatigue, complete reversal of stress. †		1 Million cycles	–	185	14,100	–	185	14,100
		100 Million cycles	–	120	9,200	–	120	9,200

* *Strengths based on area of hole.*
† *Values taken from smooth curve drawn through plotted data points in Fig. 3.*

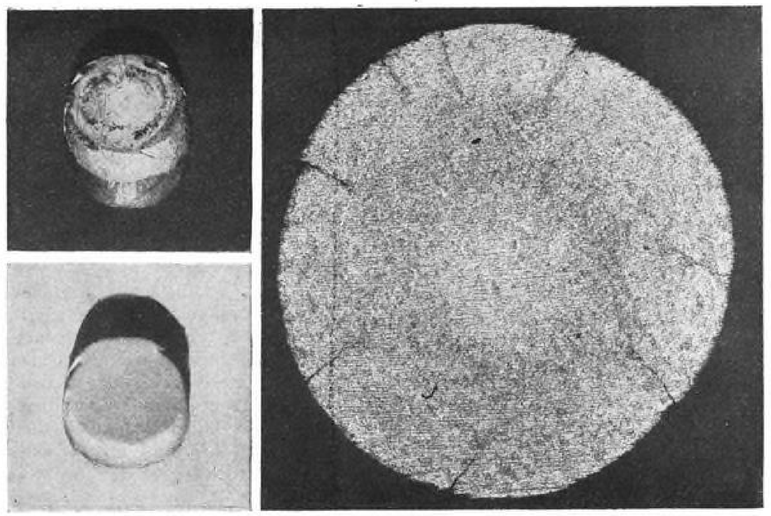

Figs. 1a and 1b (left). Head of rivet showing cracks; etched (top) and painted (bottom). **Fig. 1c** (right). Cross section of same rivet, midway of head.

TABLE II—Effect of Various Heat-Treating Temperatures and Aging Times on Shear Strengths and Driving Characteristics of ¼ in. 24ST Rivets (Flatheads).

All rivets 7/16 in. long for grip of 3/16 in., holes 0.257 in. dia.

Heat Treating Temp. Deg. F.	1-Min. Room Temperature Aging Before Driving		45-Min. Room Temperature Aging Before Driving		1-Wk. Room Temperature Aging Before Driving		Approximate Beginning of Head Cracking		
	Driving Pressure,* Lb.	Shear Strength,† Psi.	Driving Pressure,* Lb.	Shear Strength,† Psi.	Driving Pressure,* Lb.	Shear Strength,† Psi.	Interval of Room Temp. Aging, Min.	Driving Pressure, Lb.	Shear Strength,† Psi.
Initial Heat Treatment, Dia. of Driven Head, 0.375 in.									
850	7,300	34,600	7,900	34,600	.....	.....	200	8,5	
875	8,000	37,100	8,000	37,100	.....	.....	100	8,600	37,100
900	8,800	41,300	9,700c	43,100	.....	.....	30	10,000	41,900
920	9,500	43,800	9,500c	44,100	.....	.....	10	10,000	43,900
940	9,500	46,500	11,200c	45,700	.....	.....	3	9,400	46,000
960	9,500c	42,500	10,200c	41,800	.....	.....	0	9,500	42,500
Rivets Reheat-Treated at Temperatures Indicated below, after Initial Heat Treatment at 920 Deg. F. and 1 Wk. Room Temperature Aging. Dia. of Driven Head, 0.375 in.									
850	7,800	37,900	8,300	36,200	.....	.....	150	8,400	37,000
875	8,300	38,500	8,500	39,100	.....	.....	75	8,900	39,700
900	9,400	42,700	9,800c	43,300	.....	.....	40	9,700	43,200
920	9,500	44,100	10,200c	45,000	.....	.....	20	10,000	44,900
Initial Heat Treatment, Dia. of Driven Head = 0.333 in.									
900	6,400	40,300	6,700	40,500	8,000c	44,000	300	7,800	42,500
920	6,800	42,900	7,500	43,000	8,300c	44,500	150	7,800	43,500

* Letter "c" after driving pressure indicates driven heads cracked.

† Shear Strength based on area of hole (shear area per rivet = $\pi/4 \times 0.257^2 = 0.052$ sq. in.)
All rivets tested 1 wk. after heat treatment.

ful efficacy. The new rivets may not show head cracks, but the job often is of poorer quality than the original because of the out-of-round holes and other damage resulting from removing the cracked rivets. Therefore, it is wise to examine closely the reasons for condemning the cracked rivets. In another publication[2] it was shown that head cracks were harmless to the static strength of 17S rivets. We will demonstrate that not only is the same true of 24ST rivets, but also that head cracks do not adversely affect shear fatigue strengths and do not appreciably reduce resistance to corrosion. This article and the one just referred to, by showing the harmless nature of head cracks, offer arguments against unreasonable rejections and replacements of rivets showing head cracks during driving.

Even though such cracks are structurally harmless, precautions should, of course, be taken to avoid them because of their poor appearance. To this end data are included on the effect of heat-treating temperature, interval of room temperature aging, and size of driven head on the cracking tendencies of rivets. Incidentally, our article offers considerable data on the static and fatigue strengths of driven 24ST rivets, and attention is called to the fact that the strengths of the driven rivets are here based on tensile and shear areas equal to the areas of the rivet holes. Had the strengths been based on the nominal areas of the shanks of the undriven rivets, as is often done in practice, the strengths would all be increased by about 6 percent.

[2] F. V. Hartman, F. E. Rebhun, and D. A. Paul, The Effect of Head Cracks upon the Strength of Aluminum Alloy Rivets, published by Aluminum Co. of America, '41.

Effect on Strength and Corrosion Resistance of Driven Rivets

Tests in our static tensile strength investigation were made on ⅛-in. button-head 24ST rivets driven in steel fixtures of the type illustrated in Table I. Holes in the various individual fixtures varied slightly in diameter but averaged about 0.130 in. Total grip for the rivets was ¼ in. The rivets were heat treated for about 30 min. at 920 deg. F., quenched in cold water, immersed in ice water at about 35 deg. F., and squeeze driven with flat heads after short intervals of room temperature aging following removal from the ice water.

Cracked and uncracked heads were produced on rivets (from a single lot) simply by varying the driving pressure and the interval of room temperature aging before driving. The driven heads varied in thickness from about 0.060 to 0.080 in. and in diameter from about 0.180 to 0.210 in. and the driven rivets were tested in an Amsler hydraulic testing machine of 40,000 lb. capacity using a load range of 0 to 4,000 lb. The steel fixtures were threaded into steel receptacles which were pulled apart by means of spherically seated tension bolts coaxial with the rivet. In general, failures were by tensile fracture of the shank of the rivet. In no case was the failure associated with cracks in the rivet head.

Tensile strengths of the rivets without head cracks, based on the cross-sectional area of the holes in the steel fixtures, varied from 67,000 to 70,000 psi., with an average of 68,800. Tensile strengths of the rivets with head cracks varied from 66,300 to 75,000, with an average of 70,100 psi. Table I summarizes the results, indicating clearly that head cracks are harmless to the static tensile strengths of driven rivets.

Fact that, in general, the rivets with cracked heads show higher strengths than those with uncracked heads should not be considered as having any special significance because the factors which induce head cracking also generally increase the strength of the driven rivets. Those rivets which were cracked were the harder rivets driven with the higher pressures; and, since the head cracks did not operate to reduce the strength, these rivets, of course, were slightly stronger than those with less aging and driven with less pressure. This reasoning applies not only to this comparison of static tensile strengths but also to the comparison of static shear strengths that follows.

Static shear tests were made on ⅛ in. button-head 24ST rivets driven in lap joints of 0.064 in. 24ST sheet. Each specimen contained two rivets arranged as indicated in the sketch in Table I. All holes were of 0.129 in. dia. Heat treating, quenching, refrigerating, and driving of the rivets were the same as in the case of the static tensile tests. The joints were tested using a 40,000 lb. capacity Amsler testing machine. All failures were by shearing of the rivets.

Shear strengths of the rivets without head cracks varied from 42,600 to 45,000 psi., with an average of 44,500, as contrasted to values of 44,600, 48,300, and 47,300 for the rivets with cracked heads. Table I again summarizes the results and indicates clearly that head cracks are harmless to the static shear strengths of driven rivets.

Shear fatigue tests were made on rivets from the same lot as used for the static shear tests, driven in lap joints of the same sheet. Test panels were prepared by joining two sheets with a single row of rivets at the center of a lap of ½ in. These panels were cut into 1 in. wide strips of the type shown in Table I, each containing a single rivet at the center. The rivet holes were of 0.129 in. dia. Heat treating, quenching, refrigerating, and driving of the rivets were the same as in the preparation of the static tensile specimens.

Tests were made in a pair of rotating-beam fatigue machines (shown in Fig. 2) designed and built at Aluminum Research Laboratories for this type of testing. Sets of four of the 1 in. wide lap joints, each containing a single rivet, were fastened across a 1⅜ in. gap between a pair of flanged steel holders. The holders with four joints in place, 90 deg. apart, were subjected to a steady bending moment and rotated about their axis at 1,750 rpm. With every revolution of the holders, each joint was subject to completely reversed stresses tending to shear the rivet. The load producing the steady bending moment on the holders was applied and maintained by means of a calibrated steel spring.

Fig. 3 gives the results of the fatigue tests. In general, the failures were by shear of the rivets, although in a few cases tensile fatigue fracture of the sheets through the rivet holes was encountered. While there is some scatter of the data, the plotted points for both cracked and uncracked heads seem to define a single fairly smooth curve. It is evident from Fig. 3 that head cracks are harmless to the shear fatigue strengths of driven rivets.

TABLE III—Effect of Size of Driven Head on Strength of Single Riveted 24ST Lap Joints Made With ⅛ in. 24ST Rivets.

All rivets driven (flatheads) in 0.1285 in. holes. Interval of room temperature aging before driving, 1 min. Interval of room temperature aging before testing, 1 wk. Each strength is average of results of five tests.

Average Sheet Thickness, In.	Ratio of Head to Shank, Dia.	Average Ultimate Load, Lb.	Corresponding Bearing Stress,* Psi.	Corresponding Shear Stress,† Psi.	Predominant Type of Failure
0.0194	1.10	202	81,000	15,500	Driven head pulled through sheet.
0.0251	1.10	282	87,400	21,700	Driven head pulled through sheet.
0.0322	1.10	379	91,600	29,200	Driven head pulled through sheet.
0.0407	1.10	500	95,600	38,500	Rivet sheared.
0.0194	1.20	230	92,300	17,700	Driven head pulled through sheet.
0.0251	1.20	330	102,300	25,400	Driven head pulled through sheet.
0.0322	1.20	453	109,500	34,800	Driven head pulled through sheet.
0.0407	1.20	529	101,100	40,700	Rivet sheared.
0.0194	1.30	241	96,700	18,500	Sheet tore part way to edge.
0.0251	1.30	342	106,000	26,300	Sheet tore part way to edge.
0.0322	1.30	502	121,300	38,600	Driven head pulled through sheet.
0.0407	1.30	541	103,400	41,600	Rivet sheared.
0.0194	1.40	258	103,500	19,800	Sheet tore all the way to edge.
0.0251	1.40	372	115,300	28,600	Sheet tore all the way to edge.
0.0322	1.40	527	127,400	40,500	Mixed**
0.0407	1.40	567	108,400	43,600	Rivet sheared.
0.0194	1.50	279	111,900	21,500	Sheet tore all the way to edge.
0.0251	1.50	411	127,400	31,600	Sheet tore all the way to edge.
0.0322	1.50	540	130,500	41,500	Sheet tore all the way to edge.
0.0407	1.50	587	112,200	45,100	Rivet sheared.

* Bearing area = hole dia. × sheet thickness = dt = 0.1285t.
† Shear area = $\pi d^2/4 = 0.013$ square inch.

** Driven head pulled through sheet in two cases (sheet tore part way to edge in one case, all the way to edge in two cases).

Corrosion tests were made on ⅛ in. 24ST rivets driven in two 0.064 in. sheets. In some cases the sheets were 24ST, in others 24ST Alclad. Heating, quenching, refrigerating, and driving of the rivets were the same as in the static tensile tests. Half the specimens had rivets with cracks in the driven heads; the remaining specimens had rivets free from cracks.

The specimens were subjected to three different conditions of accelerated corrosion: (1) alternate immersion in a solution of sodium chloride and hydrogen peroxide, (2) immersion in a solution of sodium chloride-sodium chrom-

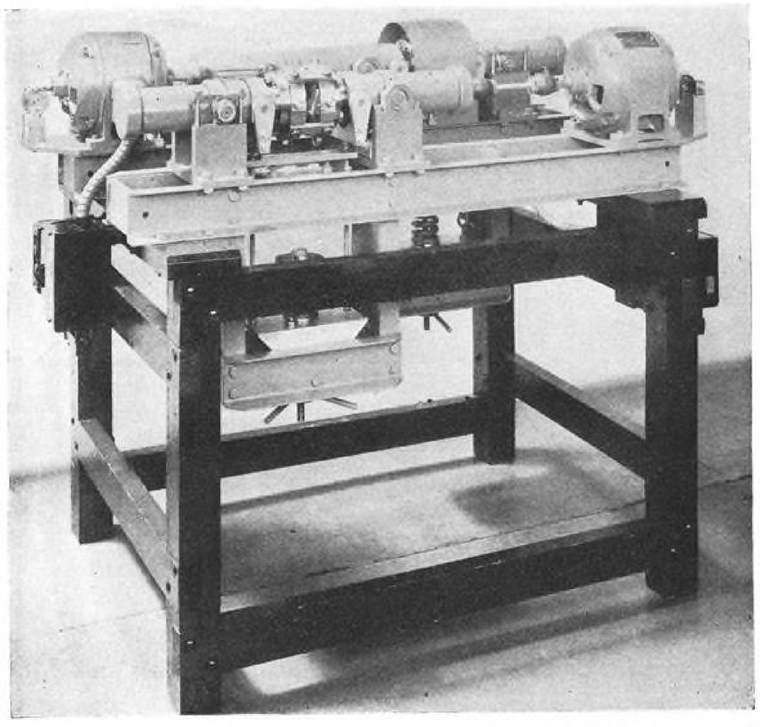


Fig. 2. Rotating beam fatigue machine for testing riveted joints.

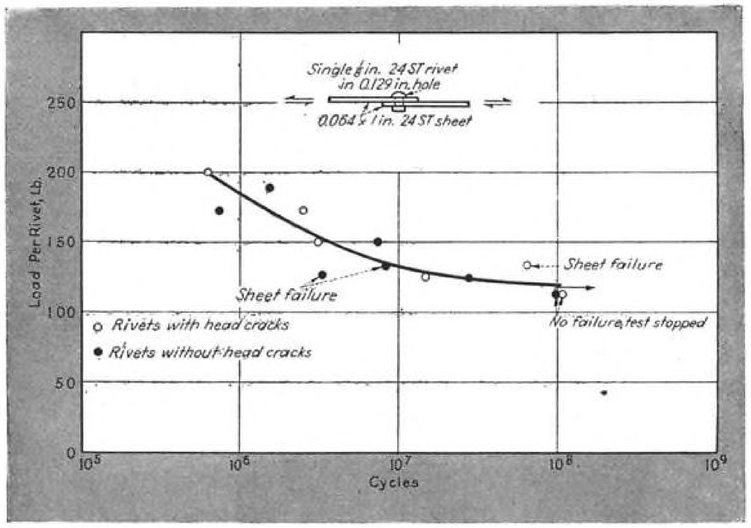


Fig. 3. Effect of head cracks on shear fatigue strength of $\frac{1}{8}$ in. 24ST rivets. All tests made with complete reversal of stress, and all failures by shear, except as noted.

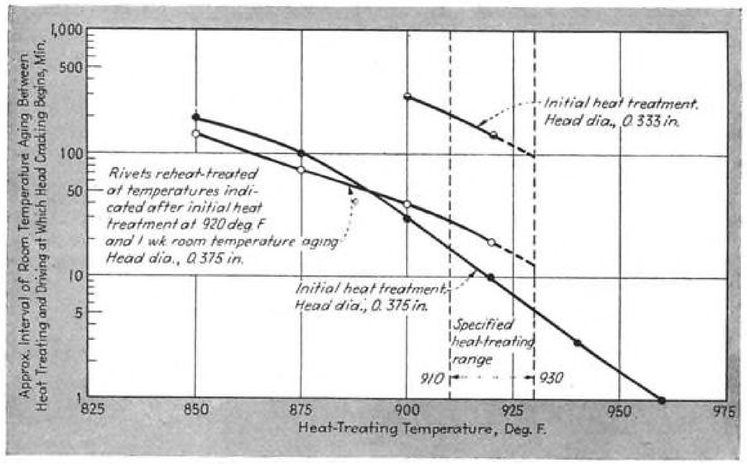


Fig. 4. Heat-treating temperature effect on head cracking.

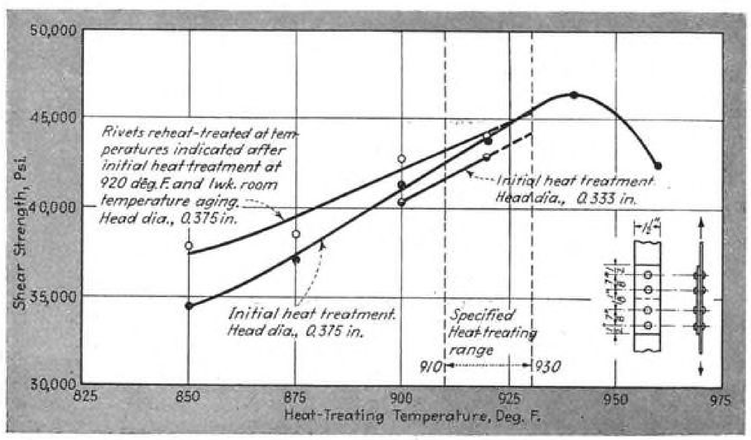


Fig. 5. Heat-treating temperature effect on shear strength. Temperatures maintained 30 min., followed by cold water quench. Room temperature aging before driving, 1. min.; before testing, 1 wk. Shear strengths based on hole area.

ate, and (3) intermittent salt spray. The first of these exposures was continued for two weeks, after which there was a complete examination comparing the cracked rivets with the uncracked rivets. Microscopic check showed the type and severity of the corrosion on the exposed surfaces to be the same in both cracked and uncracked rivets. The cracks represent additional exposed surface, and about the same type and severity of corrosion proceeded along them as occurred on the external surfaces. After five weeks' exposure to the second and third conditions, the specimens exhibit no differences in behavior between the cracked-head rivets and those free from head cracks.

Effect of Heat-Treating Temperatures and Intervals of Aging

Tests in this part of the investigation were made on $\frac{1}{4}$ in. x $\frac{7}{16}$ in. button-head 24ST rivets squeeze driven in single shear joints (of type indicated in Fig. 5) composed of $\frac{3}{32}$-in. 24ST sheet. The holes were of 0.257 in. dia. Rivets were heat treated for 30 min. at various temperatures, quenched in cold water, immersed in ice water, and driven with various intervals of room temperature aging after removal from the ice water. All driven heads were flat. About 350 rivets were driven using 6 different heat-treating temperatures and 21 different intervals of room temperature aging, ranging from 1 min. to 1 wk. Interval of room temperature aging before testing was 1 wk.

Results of this investigation are shown in condensed form in Table II and in Figs. 4, 5, and 6. It is evident from Table II and Fig. 4 that within the temperature limits here investigated the tendency for head cracking is reduced by lowering the initial solution heat-treating temperature. Table II and Fig. 5, however, show that a decrease in initial solution heat-treating temperature also reduces the shear strength of the rivets. These facts are largely of academic interest, however, because commercial 24ST rivets, in accordance with specifications, are shipped to the user only after they have received their initial heat treatment by the rivet manufacturer. The heat-treating temperature used for this initial heat treatment is, of course, always within the specified range, 910 deg. to 930 deg. F.

Rivets of 24ST are always reheat-treated by the user. It appears from Table II and Figs. 4 and 5 that reheat-treatment at the same temperature level as the initial heat treatment does not adversely affect head cracking or shear strength of the rivets. When, however, a temperature much below this level is employed in reheat-treatment, the shear strength is lowered. This effect is related to changes in microstructure that occur when 24ST is re-

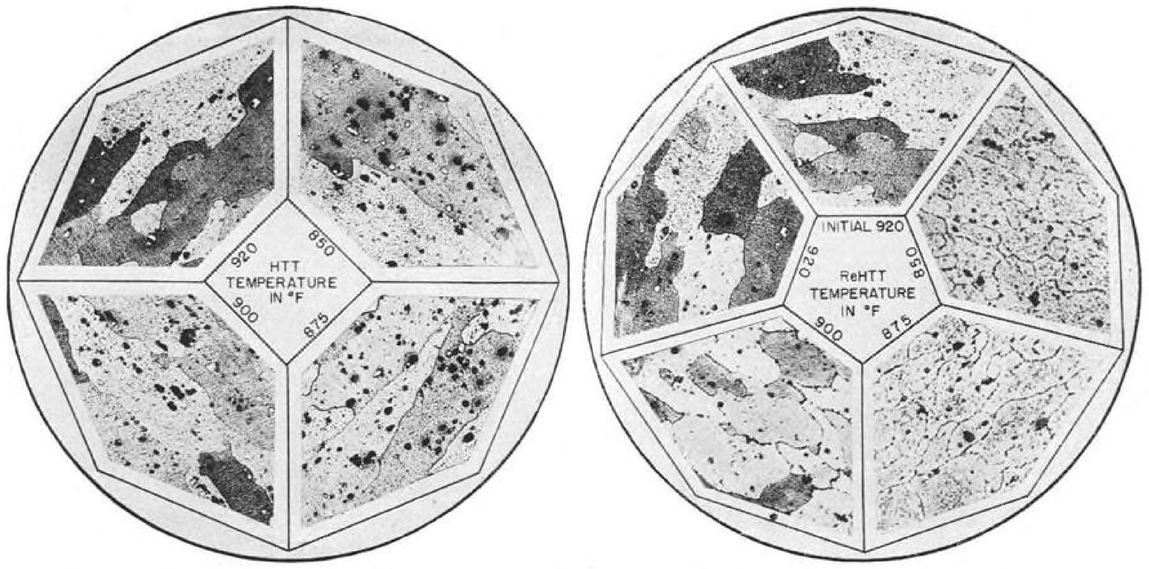


Fig. 6a (left). Effect of solution heat-treating temperature on microstructure of 24ST rivets. **Fig. 6b** (right). Effect of reheat-treatment on microstructure of 24ST rivets, initially heat-treated at 920 deg. F. All treatments 30 min. and with cold water quench.

heat-treated at temperatures below the initial heat-treating range. Effect of initial heat-treating temperature on the microstructure of 24ST rivets is illustrated by Fig. 6a. For comparison, the microstructures obtained for 24ST rivets reheat-treated at the various temperatures are shown in Fig. 6b. Microstructure of 24ST reheat-treated at temperatures more than 20 deg. F. below the initial heat-treating temperature shows evidence of considerable precipitation of previously dissolved constituents along the grain boundaries. Material in this condition not only has reduced strength but is known to have unsatisfactory resistance to corrosion.

Heat-treating or reheat-treating of 24ST rivets above the specified heat-treating range should be carefully avoided because of the danger of quench cracking and grain-boundary melting. Use of temperatures above the specified range also increases the tendency for shear cracks and, if carried far enough, will decrease the shear strength of the driven rivets as shown in Fig. 5.

The foregoing emphasizes the importance of having all reheat-treating of 24ST rivets (usually performed at the plant of the user) done at temperatures within the specified heat-treating range, 910 deg. to 930 deg. F. Reheat-treating within this temperature range will assure normal strengths, normal resistance to cracking, normal resistance to corrosion, freedom from quench cracking, and freedom from grain-boundary melting.

Table II and Fig. 4 show that the reduction of diameter of driven head from 0.375 in. to 0.333 in. is beneficial in reducing head cracks. Here again, however, it is shown in Fig. 5 that the use of the smaller diameter of driven head slightly reduces the shear strength of the rivet.

It should be emphasized that only one lot of commercial rivets is represented in this specific investigation. Some lot-to-lot variation, both as to cracking tendencies and shear strengths, is to be expected. Furthermore, the results on beginning of head cracking (such as seen in Fig. 4) do not represent precise determinations even on one lot of rivets. Much scatter is encountered in the actual test results, and the smooth curves are really only approximate indications of the trends observed.

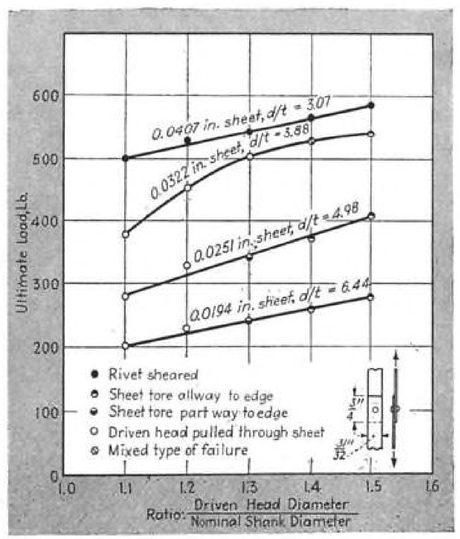


Fig. 7. Effect of size of driven head on strength of joint. Flathead 24ST rivets, .125 dia. in .1285 dia. holes; sheet of 24ST Alclad.


It has already been pointed out that decreasing the diameter of driven head on a rivet is beneficial in decreasing head cracking but that it may also reduce the shear strength of the driven rivet. Therefore, caution should be exercised in applying this method of curing cracks. Tests made here were to supply some information on how far it is safe to go in reducing head sizes.

The tests were made on $\frac{1}{8}$ in. button-head 24ST rivets squeeze driven in joints of the type shown in Fig. 7. Single riveted lap joints in thin sheet were adopted to give maximum opportunity for failures by pulling the rivet head through the hole in the sheet. Shear strength of the undriven rivets, as determined in steel double-shear tools, averaged 39,200 psi., and the average tensile properties of the four thicknesses of 24ST Alclad sheet in the longitudinal direction (direction in which the sheet was used in the joints) were:

Tensile St.	66,900 psi.
Yield St. (Offset = 0.2 percent)	50,700 psi.
Elongation in 2 in..	18 percent

All rivet holes were 0.1285-in. dia.

(*Turn to page* 295)

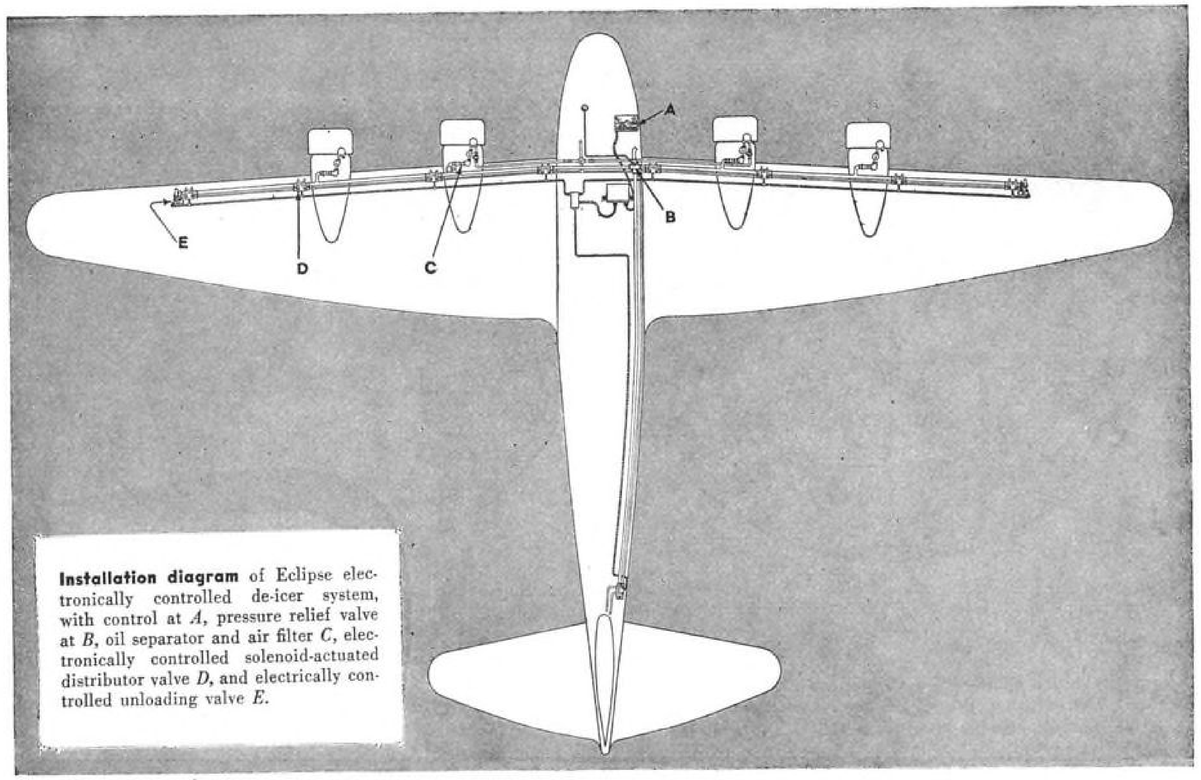

Installation diagram of Eclipse electronically controlled de-icer system, with control at *A*, pressure relief valve at *B*, oil separator and air filter *C*, electronically controlled solenoid-actuated distributor valve *D*, and electrically controlled unloading valve *E*.

Manifold-Solenoid De-Icer Systems With Electronic Control

By **M. L. TAYLOR** and **W. B. POND**, *Research Engineers, Eclipse-Pioneer Division, Bendix Aviation Corp.*

Pilots know only too well that ice doesn't form in any standardized fashion. But whatever the rate or manner, this highly flexible de-icer control system is designed to curb any icing condition encountered.

DE-ICER EQUIPMENT as currently used on aircraft provides a constantly recurring cycle of inflation and deflation of tubes along the leading edges of the protected airfoils and no control of the frequency or adjustment for completeness of inflation cycles is provided.

Unfortunately, however, nature does not supply ice at a standard rate or to a standard texture. In recognition of this condition, the Eclipse electronic de-icer control (Fig. 1) has been developed to control the operation of de-icers to suit the icing condition encountered.

In order to clarify the utility of the electronic de-icer control it might be well to review some of the fundamentals of mechanical de-icer operation. There are two principal factors in the problem of aircraft icing: (1) The adhesion of the ice to the surface and (2) the continuity of the ice. Although both factors are normally present, either factor alone will retain an ice accretion. The natural lock of an ice formation over the leading edge of an airfoil will hold that formation in place, although its adhesion has been completely destroyed. Similarly, isolated particles of ice can be retained solely by their adhesion to the surface.

Fundamentally, de-icer operation is based on playing the factors of continuity and adhesion against each other. It is because the ice is adhered to the de-icer surface that the inflation of the tube elements breaks the continuity of the ice along the leading edge. Also, it is only as the ice has continuity and enough tensile strength to maintain that continuity that the stretch of the rubber produces a peeling action which destroys the adhesion and lets the air stream carry the ice away.

Years ago aircraft operators learned that de-icers give better ice removal if at least an eighth of an inch of ice is allowed to accumulate before they are inflated. This is because the ice must build to a definite thickness in order to develop enough tensile strength to overcome adhesion. If the de-icers are operated with insufficient ice accumulated on them, the stretch of the rubber crazes the thin layer of ice, breaking it into many very small pieces, some of which are dislodged but most of which remain. Then further accumulation of ice builds on the little particles which remain, thus developing a flexible ice which is really composed of a number of separate little islands.

Once such a condition has been established the continuing cycles of inflation are relatively ineffective because the stretch of the rubber localizes in areas between islands without disturbing them.

Although operators have learned to allow a build-up of ice to accumulate before putting the de-icer system into operation, there has heretofore been nothing they could do about the recurring cycles which automatically followed in sequence at intervals of approximately 40 sec. If the rate of ice accretion was only moderate, the amount of ice built up between the first and second cycle was inadequate to afford good removal. Not only would such premature inflation remove little ice but worse, by crazing the ice it would ruin the possibilities of good ice removal thereafter. The need for a flexible control of de-icer recycling is apparent.

The Eclipse electronic de-icer control has been developed for use with the manifold-solenoid de-icer system—a system which replaces the central distributor and multiple tubing lines with pressure and suction manifolds and solenoid controlled distributing valves located at the individual de-icer boot connections. This method not only simplifies the plumbing installation and improves the rate of inflation and deflation of the de-icer boots, but it also reduces the control of inflations to an electrical circuit operating the solenoids. Thus a flexible control system is reduced to an electric timer mechanism.


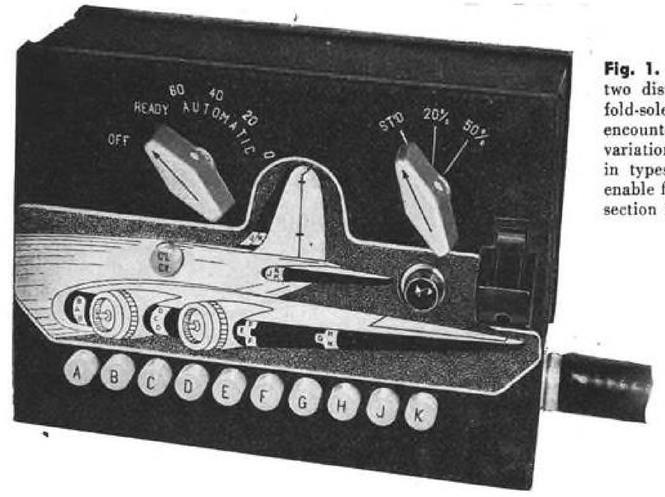


Fig. 1. Eclipse electronic de-icer control provides two distinct controls which permit operation of manifold-solenoid de-icer system to suit any icing condition encountered. One control provides adjustment to meet variations in rate of icing and one to care for variations in types of ice encountered. Illuminated push buttons enable flight crew to tell at a glance what specific de-icer section is in operation.

Fig. 2. Installation diagram of typical Eclipse manifold-solenoid de-icer system, which provides clean, light-weight, efficient system, with pressure line losses negligible because of single span-wise manifolds.

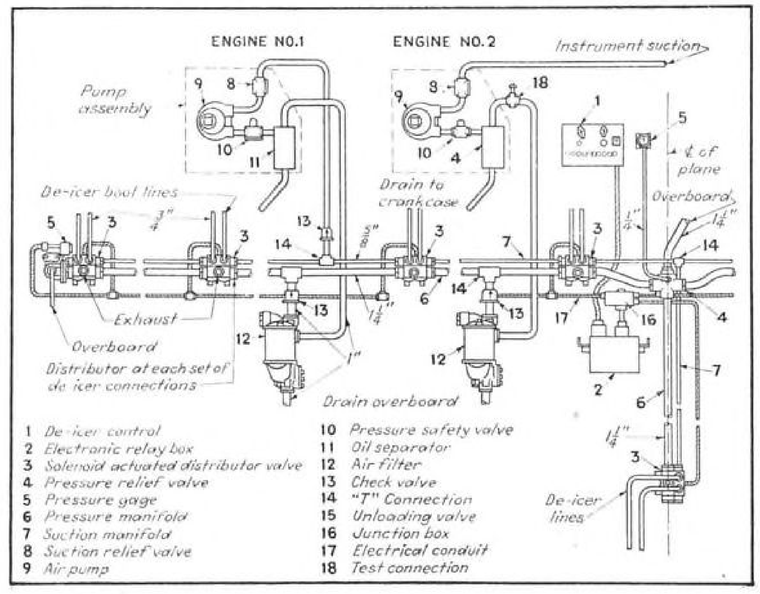

Features of Electronic Control

The two principle features of the new electronic control are the control to suit variations in rate of icing and the control to suit variations in the type of ice encountered. In light ice conditions, the unit may be set for single cycle operation and the cycle called by punching a starting button whenever the ice has built up to a thickness sufficient for good removal. If the icing condition is moderately severe the unit may be set for automatic operation with a variable time delay between cycles depending upon the severity of the ice conditions. Finally, in severe ice the unit is set for automatic continuous operation with no delay between cycles.

For most icing conditions, and particularly for slushy ice, the rapidity of inflation is very important. With the older types of de-icer operating systems the inflation of the boots was sluggish and as a result the ice had time to mold itself to the changing contour of the de-icer surface. With the manifold-solenoid system the pressure manifold acts as a reservoir, and when a given solenoid is energized a poppet type valve opens and releases a surge of pressure directly into the de-icer boot cells which immediately punch out to a full inflation. This type of operation is maintained without change throughout the variations of cycling time previously described, as it is the desired operation for most icing conditions regardless of the rate of icing.

For very hard types of ice, however, the completeness of the inflation and resulting distortion of the rubber surface become more important than the rapidity of change. Accordingly, another control is provided which increases the

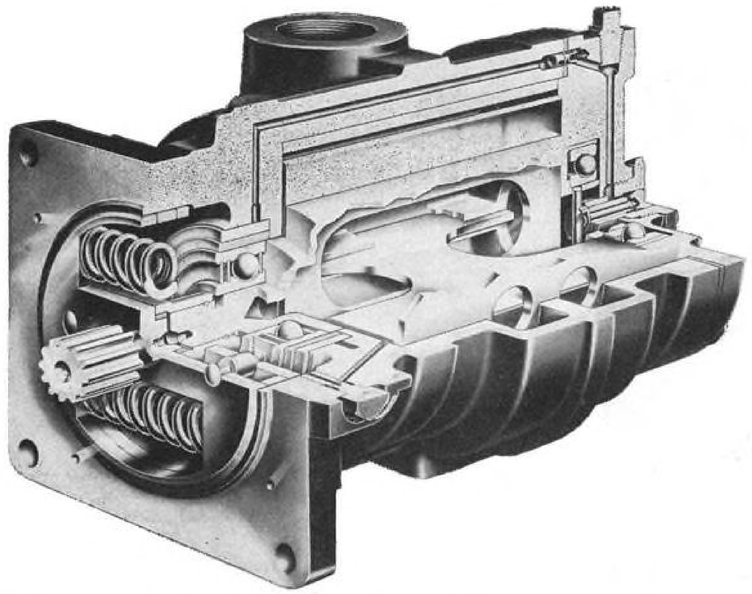


Fig. 3. Sectional view of engine-driven vane-type air pump which provides air under pressure to pressure manifold, also vacuum for operation of avigating instruments.

inflation intervals by selective increments in order to assure complete inflation or to hold the de-icer in the completely inflated position momentarily. This assures breaking the ice and by holding the rubber in the inflated position, gives time for the stretch to equalize, also assuring the peeling off of the ice particles.

The control for increasing the inflation intervals is also used as an adjustment for altitude. Only hard types of ice can be encountered at high altitudes, hence the rapidity of inflation is of less significance than at lower altitudes. Therefore, the control to provide longer inflation intervals may be utilized to compensate for the reduced output of the air pumps at high altitudes in lieu of supplying additional or auxiliary pumps for such conditions.

In addition to the foregoing control features, the control panel is equipped with indicator lights which show exactly what de-icer tubes are being inflated at any given time. Also, push buttons are provided which enable the operator to inflate any group or groups of de-icer cells desired. Such operation is purely a manual over-ride and the automatic operation is immediately restored after such interruption.

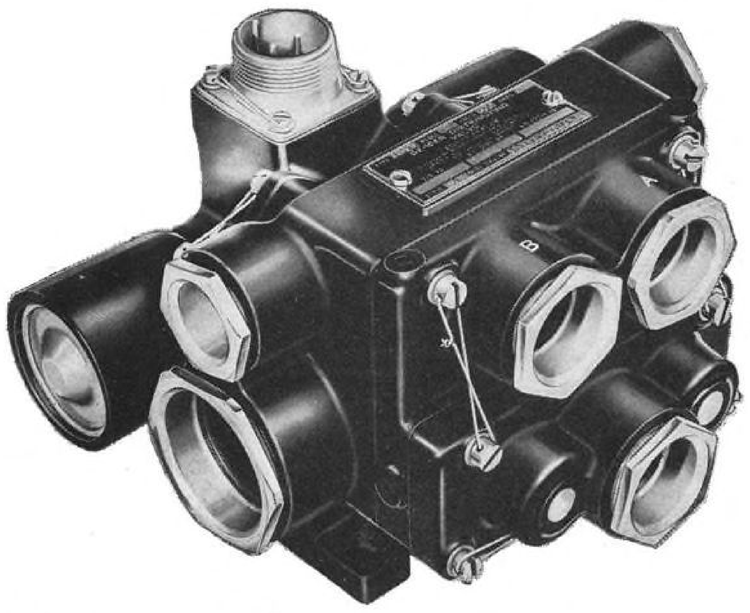


Fig. 4. Solenoid-actuated distributor valves, located at each set of de-icer connections, distribute air under pressure to de-icer cells. These valves have been designed to shut off individual de-icer.

Electronic De-Icer Control Design

The Eclipse electronic timer consists basically of a single Type 2050 thyratron tube, a condenser and resistor combination for controlling its firing time, a Strowger type step relay for switching the solenoid loads and the associated relays and switches necessary for interlocking and operating the circuit. The 2050 type of thyratron is of the hot cathode variety, and it has very stable characteristics as regards its firing voltage and can be depended upon to repeat performance accurately when used as a time delay control. Circuit for controlling the firing time of the tube is of the customary condenser resistor series combination in which the condenser is charged for each tube operation and so connected on the control grid and cathode that the grid is negative and prevents the tube from firing.

Charge on the condenser gradually leaks off over the series resistor until the grid potential has reached the firing point at which time the tube fires, completing a circuit to its plate relay and in this manner operating the timer. The various time intervals required are obtained by switching different resistors into the series condenser circuit for each timer step. In this manner is governed the time each wing solenoid is energized. A second relay, operated by the plate relay, makes and breaks the inductive solenoid load circuit and also operates the Strowger step relay which moves its contact arm and thus selects the consecutive solenoid circuits.

Provided with the Strowger relay are two banks of insulated contacts, one of which is used to switch the solenoid loads and the other to switch the timing resistors in the tube circuit. Thus it not only selects the next solenoid as it steps one position but also selects the time interval that this same solenoid will remain energized. After completing ten steps, the Strowger relay calls its own restoration control re-

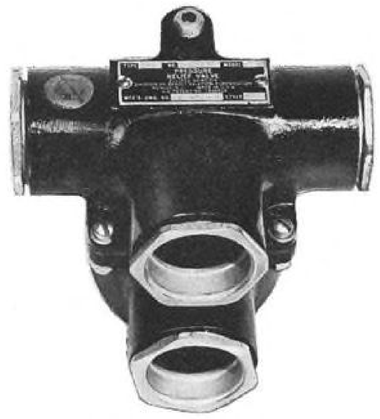


Fig. 5. Pressure relief valve limits pressure in de-icer system to 8 psi.

lay and restores to the zero position, ready for a second complete cycle of operations.

A repeat cycle will not occur until the start button is depressed, as long as the cycle control switch is set in the "single cycle" position. When the cycle control switch is advanced to the "automatic" position the next cycle will take place immediately, unless a delay between cycles has been set up. This is controlled by a six-position switch provided to introduce one of six resistance values in the timer circuit when the Strowger relay is in the home position. These resistance values have been arbitrarily set to give a variable time delay from 60 to 0 sec. between cycles.

To increase the length of impulse to the individual solenoids, a gang-switch is provided which calls in two completely different sets of timing control resistors, depending upon whether it is set for a 20 or 50 percent increase.

Manual control of the solenoids is provided for by a set of ten push button contacts that connect the solenoids directly across the 24 v. line. The contacts are active at any time, so it is possible to interrupt any cycle that is taking place and operate an individual solenoid, in which case the automatic cycle stops and resumes only after the manual push button has been released, at which time it will pick up operation at the point where the cycle was interrupted.

Provision has been made for operating the timer circuit directly on a 24 v. line, which would give insufficient plate voltage for the thyratron if it were not for the fact that an energy condenser is used to double the voltage momentarily and thus give a high enough level at firing times to maintain stable operation. The energy condenser is charged each time the tube fires and is placed in series with the line on the plate of the tube ready for the next operation.

Manifold-Solenoid De-Icer System

The manifold-solenoid de-icer system (Fig. 2) consists essentially of air pumps, a single span-wise suction and pressure manifold, solenoid actuated distributor valves, pressure type oil separator and air filters, pressure relief valves, and unloading valves. Distribution of air under pressure, provided by engine driven vane type air pumps (Fig. 3) to the de-icer cells is accomplished by energizing the solenoid actuated distributor valves (Fig. 4) located at each set of de-icer connections.



Fig. 6. Eclipse oil separator and air filter designed to remove oil vapor from manifold-solenoid de-icer system.

These valves have been designed for straight-through manifold connections, and they serve as the main support of the manifold lines. The de-icer connection ports are marked *A* and *B* to correspond to the markings of the terminals in the electrical disconnect plug and are in reality two identical valve units in one body having a common exhaust port which normally dumps into the wing cavity but which is provided with a compression fitting in case it is necessary to connect the discharge overboard. The check valve spring on the discharge is designed to close at 1 in. Hg. differential.

Under normal de-icer tension, this means that the inflation cells of the de-icer will deflate 95 percent of their inflated capacity overboard. The residual 5 percent of air is then pulled out and the cells are held under suction by a connection to the suction manifold. These valves have been designed to close—i.e., shut off—the individual de-icer in the event of failure of either the electric or pressure system. This has been done as a safeguard against any possibility of landing with any de-icer inflated. The solenoid operates a small pilot valve which reverses pressure and suction on the opposite sides of a diaphragm, which in turn operates the main poppet valve which connects the de-icer to pressure or exhaust and suction.

Pressure in the system is maintained at 8 psi. by the pressure relief valve (Fig. 5); an oil separator and air filter (Fig. 6) is incorporated to remove air vapor and condensation from the system, and air check valves are used to prevent reverse flow of air.

Unload Valves Installed

In order to allow circulation of warm air from the pumps through the system and to unload the air pumps when the system is not being used, manifold unloading valves (Fig. 7) are installed at each outer end of the manifold. The valves have been designed for mounting on the end of the solenoid actuated distributor valves and are provided with double outlet port connections, either of which can be used. These valves are solenoid operated and automatically close whenever the system is put in operation.

The Eclipse electronic control with the Eclipse manifold-solenoid de-icer operating system affords a simplified but thoroughly dependable system for operating Goodrich de-icers efficiently and at their greatest effectiveness under all types and rates of icing conditions.



Fig. 7. Manifold unloading valves installed at each outer end of pressure manifold permits circulation of warm air through manifold-solenoid de-icer system and also unloads air pumps when system is not being used.

AIRCRAFT PRODUCTION ANALYSIS

Key to Assembly Line Efficiency

Part I

BY LOREN F. DORMAN, *Production Design Engineer,*
Curtiss-Wright Corp., Aircraft Div., Missouri.

Complete detailing of 1943's thorough line-production breakdowns shows means by which more military planes are being made faster.

WITH THE ADVENT of large number contracts for the construction of military and commercial aircraft, it has become desirable to assemble aircraft and their components by a more efficient method than in the past.

To date, we consider the most efficient assembly procedure to be that known as progressive line assembly, progressing either constantly or periodically, after the manner of automotive continuous-line assembly.

Since an aircraft is a relatively complicated piece of machinery, it must undergo a thorough production analysis of design and manufacture, in order that its detail application to a continuous line assembly may be reduced to simple planning operations.

Purpose of this article is to show that such a production analysis will result in the successful establishment of an efficient assembly line.


Successful production of aircraft and aircraft components by mass production line assembly methods requires that a flow of assemblies be operated so that a complete aircraft may be fabricated with maximum man-hours relative to minimum elapsed hours.

Establishment of such a system requires that the subject aircraft undergo a thorough production analysis, which consists of four progressive phases, each developed and coordinated with the others.

The first phase-production breakdown provides for a complete production analysis of the airplane during the design stage in order to establish suitable components for construction relative to those items which affect fabrication and assembly. Items for consideration are handling size, jigging, sequence of assembly, interchangeability, subassembly, etc.

Second phase provides for the production planning and line assembly planning of those items established in our first phase. Production planning essentially consists of major unit, minor unit, subassembly and planning, bench

Fig. 1. Procedure of line assembly development.

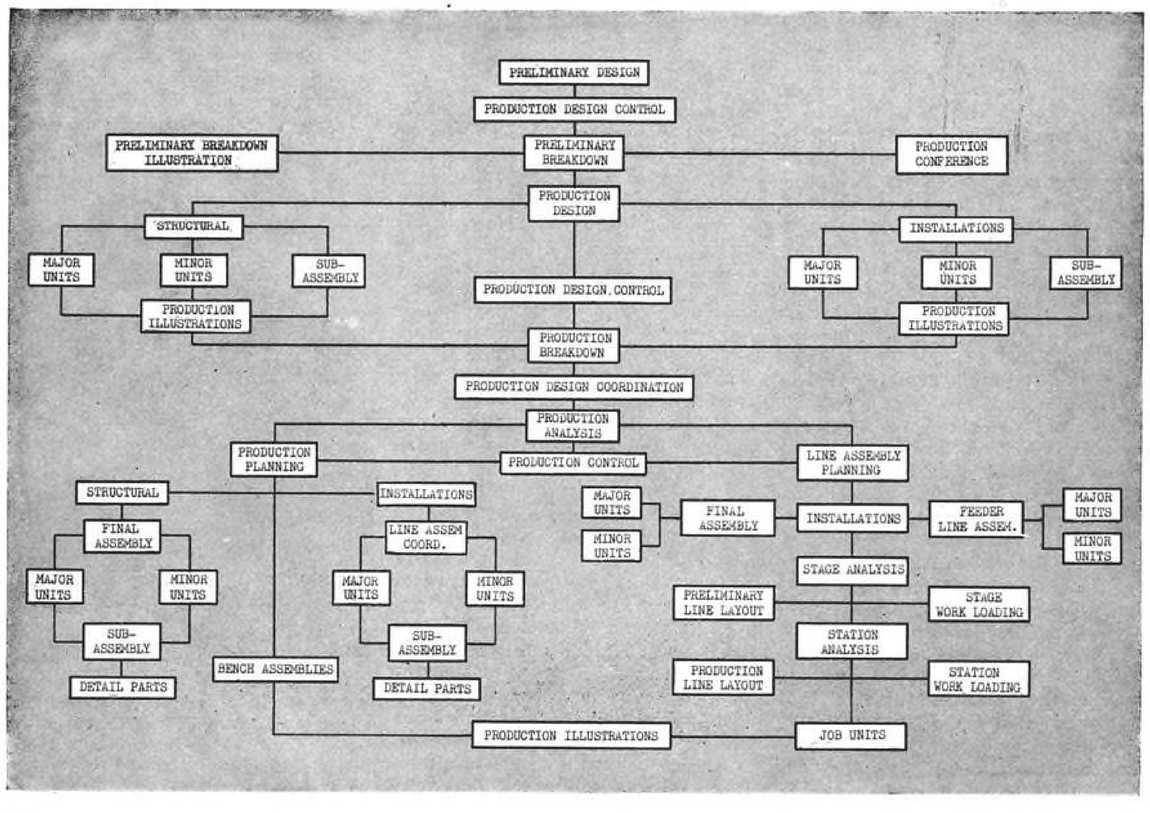

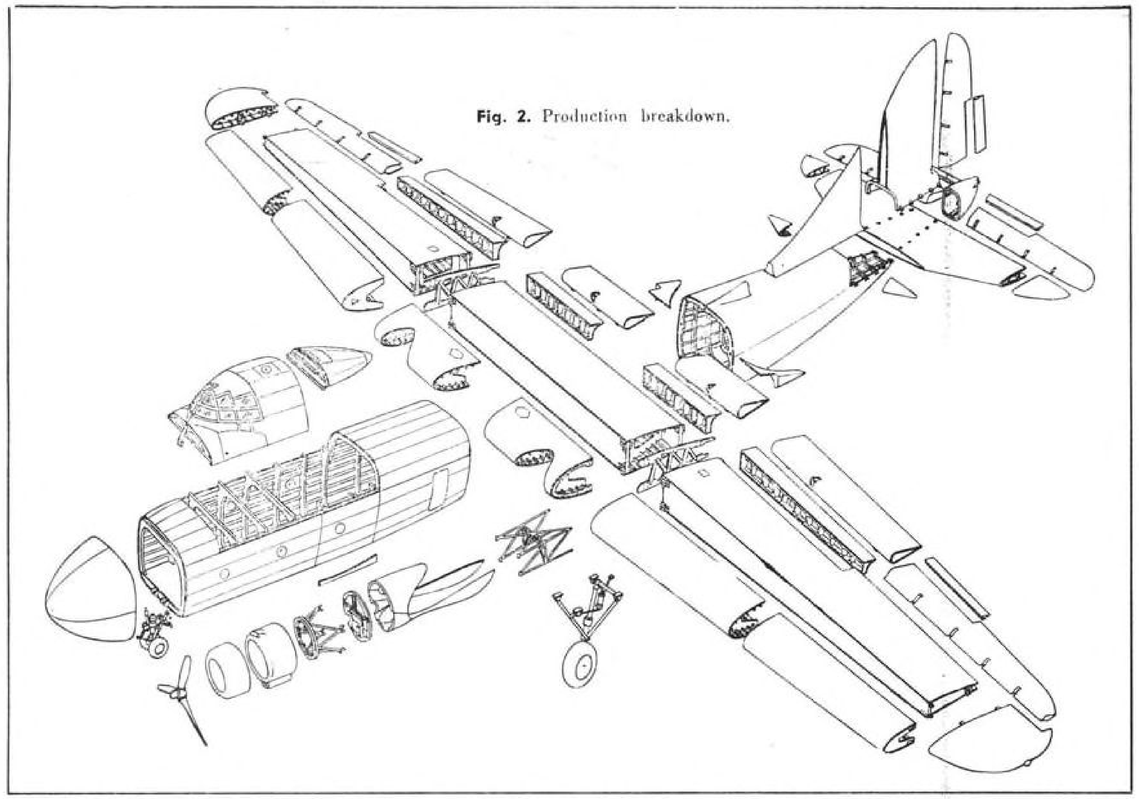


Fig. 2. Production breakdown.


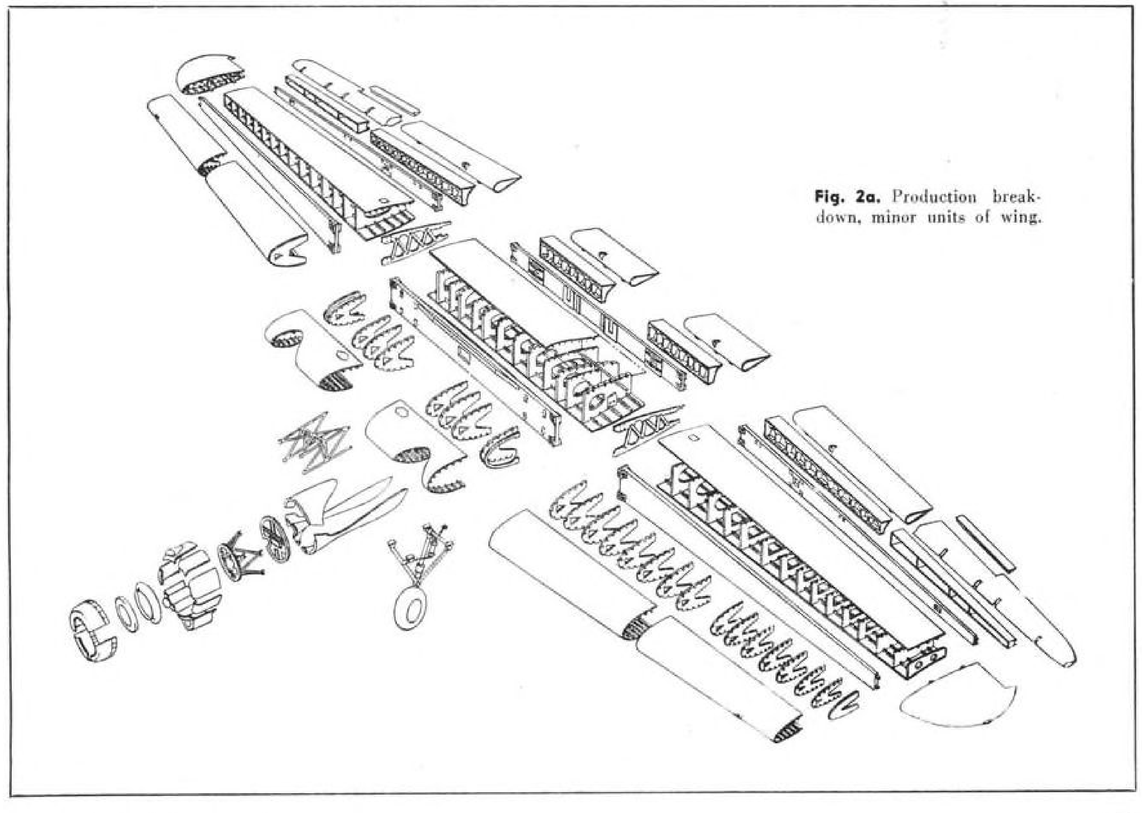


Fig. 2a. Production breakdown, minor units of wing.

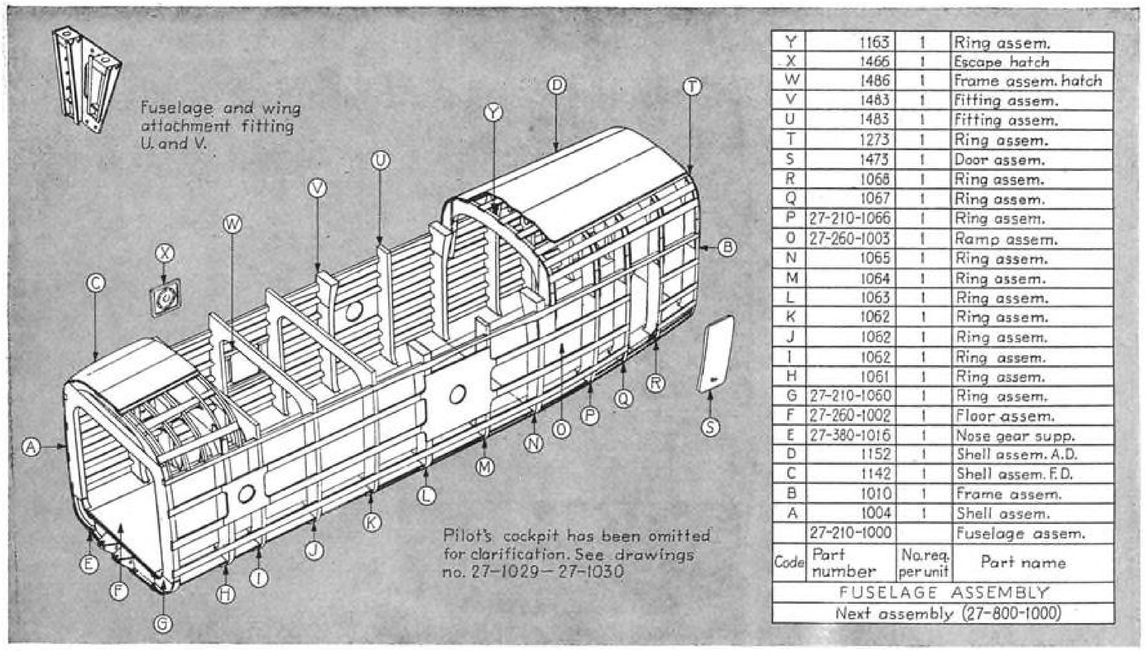

Code	Part number	No. req. per unit	Part name
	27-210-1000		Fuselage assem.
Y	1163	1	Ring assem.
X	1466	1	Escape hatch
W	1486	1	Frame assem. hatch
V	1483	1	Fitting assem.
U	1483	1	Fitting assem.
T	1273	1	Ring assem.
S	1473	1	Door assem.
R	1068	1	Ring assem.
Q	1067	1	Ring assem.
P	27-210-1066	1	Ring assem.
O	27-260-1003	1	Ramp assem.
N	1065	1	Ring assem.
M	1064	1	Ring assem.
L	1063	1	Ring assem.
K	1062	1	Ring assem.
J	1062	1	Ring assem.
I	1062	1	Ring assem.
H	1061	1	Ring assem.
G	27-210-1060	1	Ring assem.
F	27-260-1002	1	Floor assem.
E	27-380-1016	1	Nose gear supp.
D	1152	1	Shell assem. A.D.
C	1142	1	Shell assem. F.D.
B	1010	1	Frame assem.
A	1004	1	Shell assem.

FUSELAGE ASSEMBLY
Next assembly (27-800-1000)

Fig. 3. Fuselage Assembly.

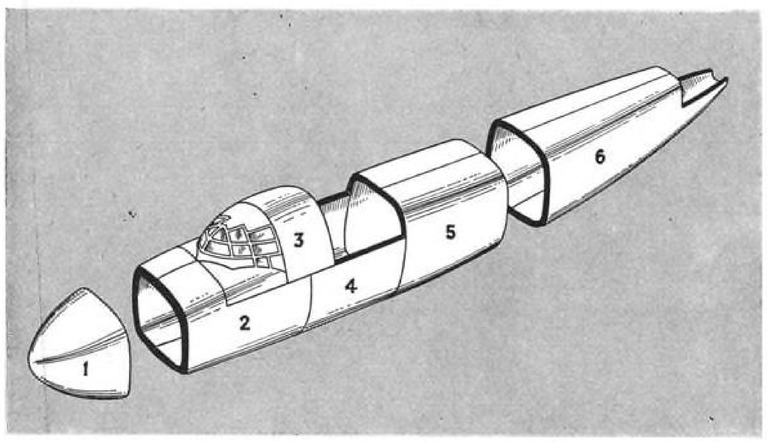


Fig. 5. Zone chart (zones are right and left).

Planner: R. Schmidt — Revised — Date
Checked: B. K. Jones — R.S. — 10/10/42
Approved: R. A. Foster

JOB UNIT OPERATION SHEET

Job Unit Number 429-4402

Production Illustration No. 2071 — Model — Unit — Station — Zone

Operation	Part Number	Part Name	Quantity	Prod. Control	Assembly Procedure	Tools Required	Elapsed Time	Time Stud.
1	S84-46-022-9	Pad	2		Attach pads to brackets -	Crescent		
	AN515-8-24	Screws	4		Oil tank lower surface.	Wrench	8 min.	O.K.
	AN960-8	Washers	8			Screw Driver		C.M.
	NAF1137-832	Nuts	4					
2	S84-46-022-13	Pad	2		Attach pads to brackets -	Crescent		
	AN515-8-24	Screws	4		oil tank upper surface.	Wrench	8 min.	O.K.
	AN960-8	Washers	8			Screw Driver		C.M.
	NAF1137-832	Nuts	4					
3	S84-46-500	Strap Assem.	2	Shortage 10-16-42	Attach straps to brackets -	Crescent		
	AN24-26	Bolts	2		oil tank upper surface	Wrench	6 min.	O.K.
	AN960-416	Washers	2			Pliers		C.M.
	AN320-4	Nuts	2			Screw Driver		
	AN380-62-2	Cutters	2					
4	63701	Fuel Strainer	1		Bolt strainer to casting -	1/2" Brush		
	AN4-43	Bolts	2		lower surface of fuel tank.	3/8" Hex Head	10 min.	
	AN960-416	Washers	2		(Apply sealing compound).	Socket Wrench		
	NAF1137-428	Nuts	2					
	AN644-17D	Elbow 45°	1		Apply threadlube to elbows and			
	AN642-17D	Elbow 90°	1		screw in strainer as shown.			

Fig. 6. Job unit operation sheet.

assembly, detail parts and planning, parts and assembly priorities, operation analysis and routing, tool planning and control, production order and release, project coordination, detail methods analysis, and unit flow chart development.

Line assembly planning encompasses the entire assembly system of a complete aircraft, including final line and feeder line assemblies. In detail it covers final assembly line layout and development, subassembly and feeder assembly line layout and development, shop development, stage analysis, and the establishment of handling jigs and fixtures for final assembly.

Final line assembly planning consists of development on the shop floor of a line assembly system to assemble those major components previously fabricated, to install items not part of a subassembly, and to test and inspect installations. And feeder line assembly planning is the development of tributary assembly lines which provide bench assemblies and subassemblies and minor structural and functional units, with a timed flow of units achieved for final assembly relative to its requirements.

The third basic phase is production control, a procedure whereby major units, minor units, component parts, and installations are ordered, accounted for, handled, stored, and issued relative to assembly system requirements.

It is important to note that the establishment and maintenance of a production control system *determines to what degree of efficiency* a successfully

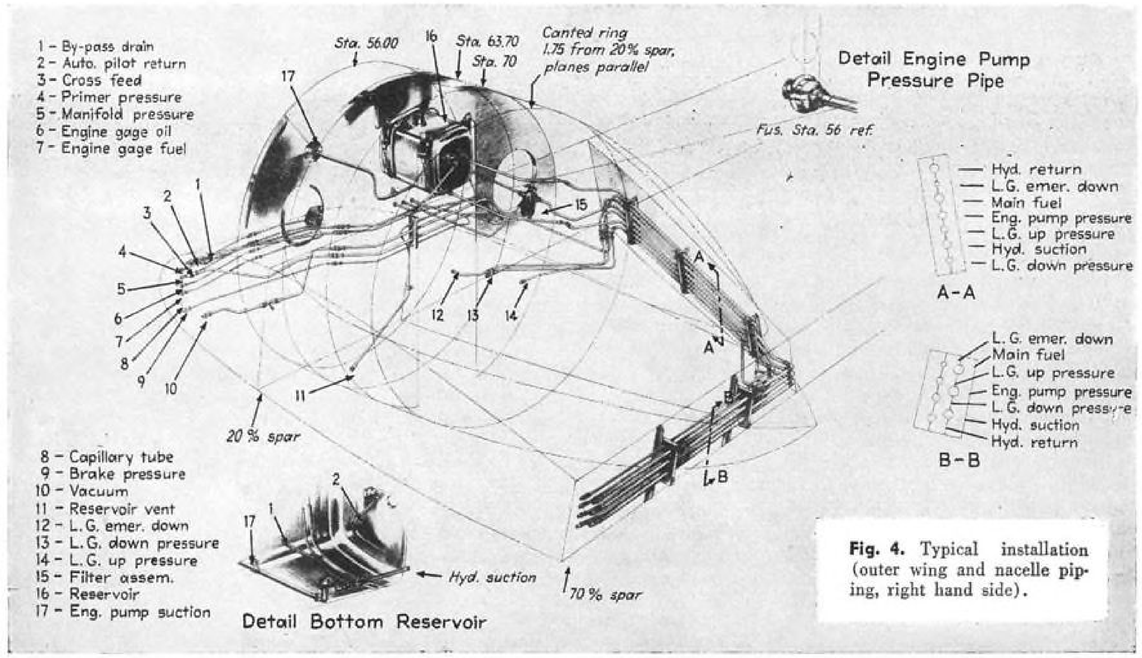


Fig. 4. Typical installation (outer wing and nacelle piping, right hand side).


developed assembly line will operate.

Fourth and final phase is the use of production illustrations, a clear, concise system for the conveyance of detailed production information based on the use of perspective drawings. These illustrations, made concurrently with the design and production stages, consolidate pertinent production information and eliminate blue prints, except as required by supervisory personnel.

It is required in the development of these phases that they be considered relative to the airplane design or production stages, such as preliminary design, production design, production planning, line assembly planning, fabrication and subassembly, and final assembly. In addition, the responsibility of each department or group, coordination procedures, and the preparation and distribution of production illustrations must be considered (Fig. 1).

During preliminary design, a major and minor unit production breakdown should be made in conjunction with structural, functional, and arrangement requirements. This breakdown should be done by the production

Fig. 7. Work loading chart.

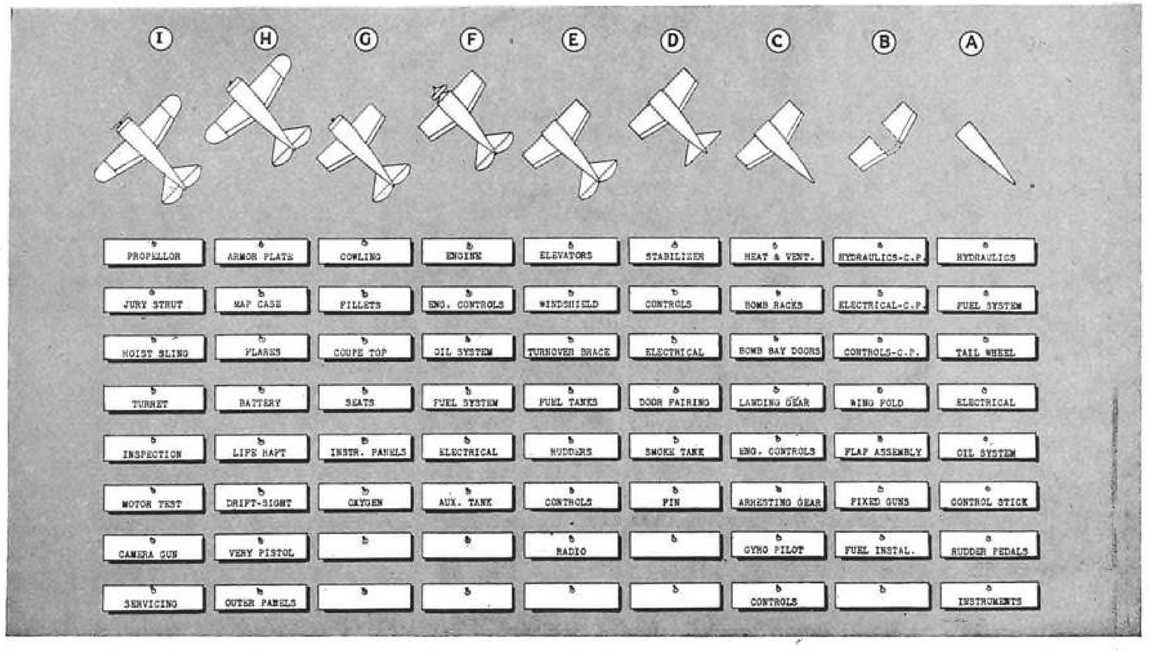

design engineer, together with the project engineer, development engineer and design layout engineers. A production illustration should then be prepared defining the preliminary complete airplane production breakdown and should be distributed to those concerned for preliminary study.

Engineering, planning, tooling, and the shop should then arrange for a production planning conference in order to coordinate thoroughly the design, fabrication, assembly, and service requirements. The decisions resulting from this conference should be recorded, and the resultant airplane production breakdown should be issued, as before, to establish the major and minor structural and functional units to be designed and manufactured (Fig. 2 and Fig. 2a).

The airplane production breakdown should be coordinated with the engineering drawing breakdown by the project engineer, through the engineering planning engineer in conjunction with production design, in order that the engineering drawings will match the fabricated assemblies.

The final production breakdown should determine the major, minor, and subassembly unit design sections for both structure and installations. It should be the responsibility of production design engineering to coordinate any changes with production planning and obtain its approval.

As production design progresses, unit design layouts should frequently be analyzed by those concerned with the planning. Items for consideration are sequence of assembly, power riveting, handling, storage, detail parts fabrication, subassemblies, jigging, sheet sizes and gages, sub-assembly installation, final assembly installation, splices, matching parts, holes, tolerances, etc., spot-welded assemblies, production equipment, subcontract items, and processing.

During further progression of the production design, production illustrations should be prepared in the following order: Major structural units (Fig. 3), minor structural units, subassembly drawings, major functional installations, minor functional installations (Fig. 4), functional installations, subassemblies, and preliminary jigs and fixtures (Fig. 9) as requested by planning and tool design. These production illustrations should be issued to planning, tooling, and the shop in advance of, or in conjunction with, normal production drawings to facilitate production analysis.

As the design is released to planning for production fabrication, the production design group should check each detail, subassembly, and major assembly for conformance to the breakdown and current production requirements. Questionable items should be coordinated with planning.

Upon receipt of advance production drawings, production planning of those components established by the production breakdown should be undertaken, according to normal planning procedures and the establishment of those functional installation items which may be a part of subassembly.


Line Assembly Planning

Since the basic procedures necessary for the development of both final and feeder line assembly systems are similar in detail, the procedures which follow will be confined to the development of final line assembly, this being the more complicated of the two types.

In order to function most efficiently, the line assembly planning group should be composed of a group of men with both planning and shop experience supervised by a coordinating supervisor familiar with planning, shop, and time study methods, conveyor systems, production control systems, and plant layout. A lead planner should be assigned to each unit installation, and should have as his immediate assistant the shop lead man assigned to cover a specific section of the final assembly line;

(*Turn to page* 332)

Fig. 8. Bench assembly.

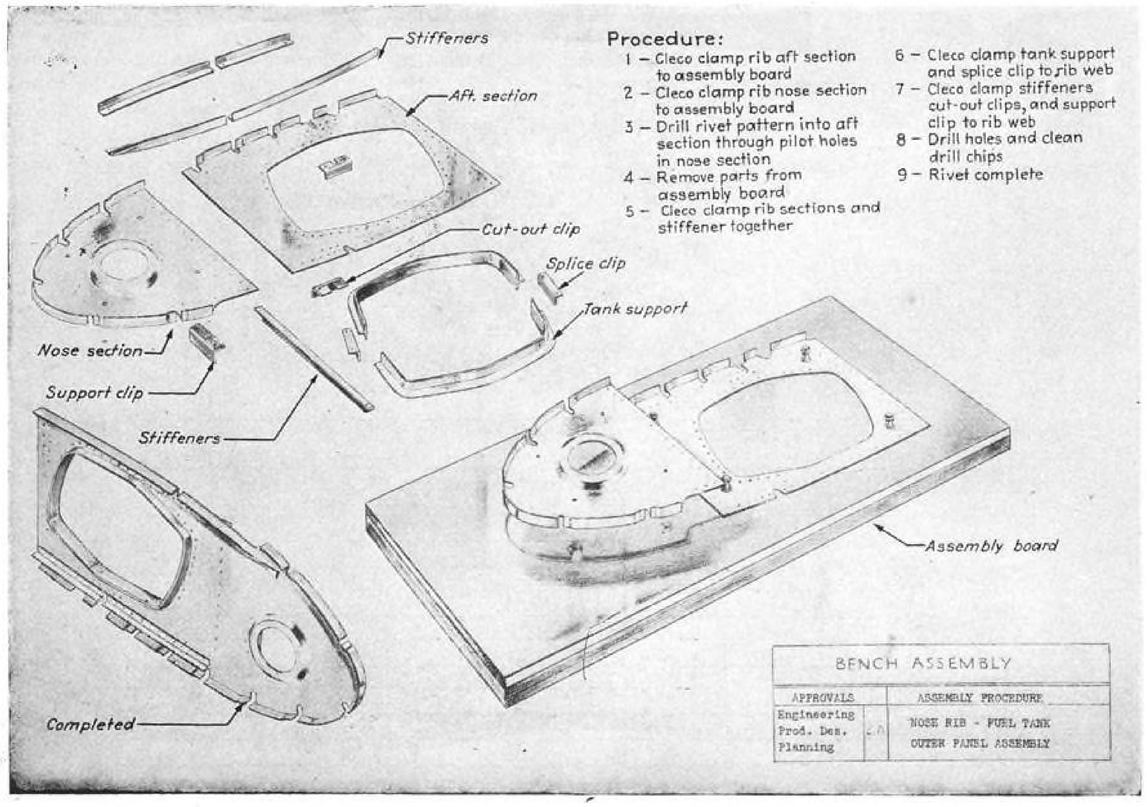

Analysis of Members With Variable Moments of Inertia

By YVES NUBAR, *York Research Corp.*

Presenting in concise and ready form essential data and characteristics for analyzing members with varying moments of inertia, including general expressions for slope deflection equations, fixed end moments, stiffness and carry-over factors, and three moment equations.

As a result of increasingly complex requirements in the design of structural frameworks—in aircraft construction as well as in many branches of civil engineering—the analysis of rigid structures has become an everyday necessity. For structures in which the members have constant moments of inertia along their length, a number of methods of frame analysis are available, well developed and of straightforward application.

Among them, the method of slope deflection, that of Hardy Cross, and the equations of three moments are probably in greatest use.

The problems of how to deal with the frequent case of members with varying moments of inertia is somewhat more complex and, for the average engineer, not adequately covered.

Although exact methods for the analysis of such cases are in existence (see, among others, the seven references given at the conclusion of this article) they are widely scattered in the technical literature. Many of them, in the opinion of the writer, are somewhat limited in extent and in scope.

As a service to the industry, then, this article derives and presents in ready form all essential data and characteristics for the analysis of members with moments of inertia varying arbitrarily, including the general expression for the slope deflection equations, fixed-end moments, stiffness and carry-over factors, three moment equations, etc.

The engineer who is familiar with the application of some of the above-mentioned methods to rigid frames with members of uniform size will make use of these general data in an identical fashion, whether he favors the method of slope deflections, or that of Hardy Cross, or the theorem of three moments.

Analysis of a twin-boom system for a large airplane will be outlined here as as illustration. Symbols are defined when first used, and in addition they are tabulated in the accompanying box for handy reference.

In Fig. 1, line 1–2 represents the original position of a member in a rigid

Symbols

l	span.
E	modulus of elasticity.
I	moment of inertia.
k	I/l.
y_1 , y_2	transverse displacements of of ends 1 and 2.
ω_1 , ω_2	rotations at ends 1 and 2.
R	$(y_2 - y_1)/l$.
M	bending moment.
m	bending moment, when member is on simple supports.
M_{12} , M_{21}	moments exerted by joints 1 and 2 upon member 1–2.
m_{12} , m_{21}	fixed-end moments exerted by joints 1 and 2 upon member 1–2.
M_1, M_2, M_3	moments over supports in continuous beams.
H	transverse shear.
A, B, C	areas of diagrams, as shown in Figs. 2, 3, and 4.
a, b, c	ratios locating centers of gravity of these areas.
S_{12}, S_{21}	stiffness at ends 1 and 2 of members 1–2.
c_{12}, c_{21}	carry-over factors at ends 1 and 2 of member 1–2.

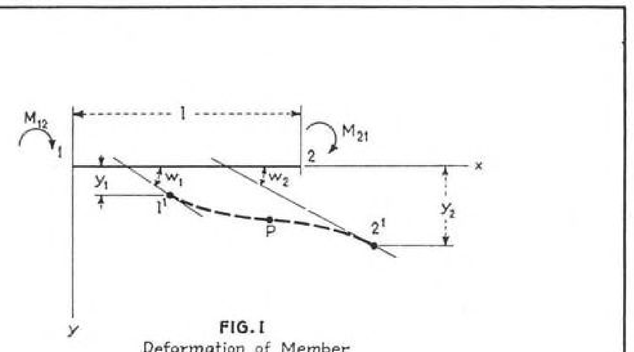


FIG. 1
Deformation of Member




FIG. 2
m/EI Diagram




FIG. 3
x/EI Diagram




FIG. 4
(l-x)/EI Diagram

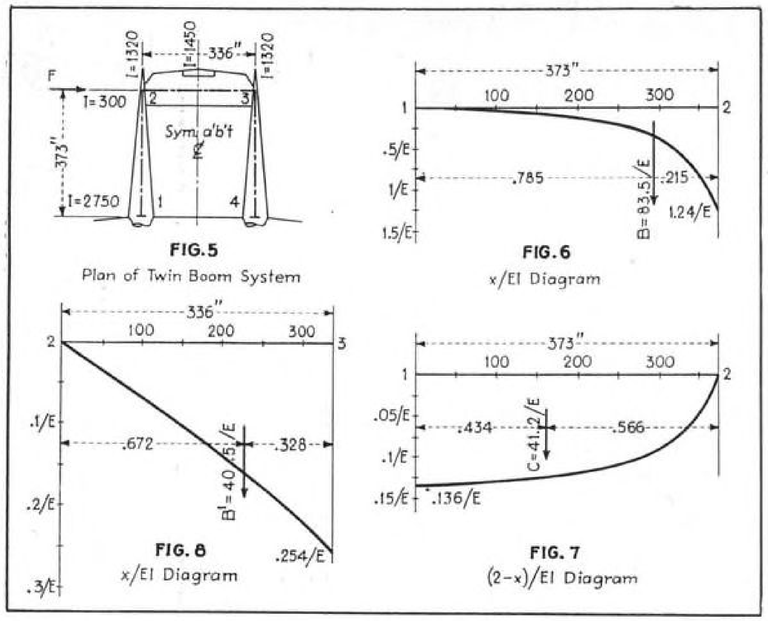


FIG. 5
Plan of Twin Boom System

FIG. 6
x/EI Diagram

FIG. 8
x/EI Diagram

FIG. 7
(2-x)/EI Diagram

frame; 1′–2′ its position after deformation and displacement. Joints 1 and 2 have moved transversely distances y_1 and y_2, the end tangents have rotated through angles ω_1 and ω_2. Member 1–2 is loaded in any arbitrary fashion (loading not shown). Moments are exerted upon the member by the adjoining parts of the frame; they are denoted by M_{12} and M_{21}, applied respectively at joints 1 and 2. All rotations and moments are considered positive in a clockwise direction.

With coordinate axes as adopted in Fig. 1, the basic equation relating displacements to applied loads is

$$\frac{d^2y}{dx^2} = -\frac{M}{EI} \qquad (1)$$

in which, x and y are the coordinates of any point P on the member, M is the bending moment, I the moment of inertia, and E the modulus of elasticity, all referred to point P (therefore variable along the span, in the general case). The derivation of this formula, together with the underlying assumptions, may be found in any textbook on mechanics; it will be expressly assumed here that the axial deformations in the member are negligible, as is usually the case, and that elastic instability phenomena may be disregarded.

It is known that M may be expressed as follows

$$M = +m - M_{21}\frac{x}{l} + M_{12}\left(1 - \frac{x}{l}\right) \qquad (2)$$

in which m represents the bending moment which would exist at point P if the ends of the member were free to rotate.

Substituting (2) into (1)

$$\frac{d^2y}{dx^2} = \frac{1}{EI}\left[-m + M_{21}\frac{x}{l} - M_{12}\left(1 - \frac{x}{l}\right)\right] \qquad (3)$$

Integrate equation (3)

$$\frac{dy}{dx} = -\int_o^x \frac{m}{EI}\,dx + \frac{M_{21}}{l}\int_o^x \frac{x}{EI}\,dx - \frac{M_{12}}{l}\times \int_o^x \frac{(l-x)}{EI}\,dx + \omega_1 \qquad (4)$$

This expression satisfies the left boundary condition that for $x = 0$, dy/dx should equal ω_1; the corresponding boundary condition at the right end requires that $dy/dx = \omega_2$ for $x = l$, or

$$\omega_2 = -\int_o^l \frac{m}{EI}\,dx + \frac{M_{21}}{l}\int_o^l \frac{x}{EI}\,dx - \frac{M_{12}}{l}\times \int_o^l \frac{(l-x)}{EI}\,dx + \omega_1 \qquad (5)$$

The three integrals appearing in this relation have simple meanings:

$$\int_o^l \frac{m}{EI}\,dx$$

represents the area A between the x axis and a curve plotted to represent m/EI at each point along the span (Fig. 2); similarly,

$$\int_o^l \frac{x}{EI}\,dx \quad \text{and} \quad \int_o^l \frac{(l-x)}{EI}\,dx$$

are respectively areas B and C of diagrams x/EI (Fig. 3) and $(l-x)/EI$ (Fig. 4). These areas are shown located on the vertical of their centers of gravity. A is a dimensionless number, while B and C have $(\text{force})^{-1}$ as dimension.

Therefore:

$$\omega_2 = -A + M_{21}\frac{B}{l} - M_{12}\frac{C}{l} + \omega_1 \qquad (6)$$

Integrating (4)

$$y = -\int_o^x dx\int_o^x \frac{m}{EI}\,dx + \frac{M_{21}}{l}\int_o^x dx\int_o^x \frac{x}{EI}dx - \frac{M_{12}}{l}\int_o^x dx\int_o^x \frac{(l-x)}{EI}\,dx + \omega_1 x + y_1 \qquad (7)$$

This relation satisfies the left boundary requirement that y should equal y_1 for $x = 0$; it should also equal y_2 for $x = l$, or $y_2 =$

$$-\int_o^l dx\int_o^x \frac{m}{EI}\,dx + \frac{M_{21}}{l}\int_o^l dx\int_o^x \frac{x}{EI}\,dx - \frac{M_{12}}{l}\int_o^l dx\int_o^x \frac{(l-x)}{EI}\,dx + \omega_1 l + y_1 \qquad (8)$$

Considering the first integral in (8), it can be proved easily that

$$\int_o^l dx\int_o^x \frac{m}{EI}\,dx = \int_o^l \frac{m}{EI}(l-x)\,dx \qquad (9)$$

It is only necessary to remark that both members of (9), considered as functions of l, have identical derivatives with respect to l and that both assume the value 0 for $l = 0$.

Similar results obtain for the other integrals in (8)

Therefore, calling $y_2 - y_1$ the relative deflection of the member and designating it by Rl, equation (8), may be written $Rl =$

$$-\int_o^l \frac{m}{EI}(l-x)\,dx + \frac{M_{21}}{l}\int_o^l \frac{x\,(l-x)}{EI}\,dx - \frac{M_{12}}{l}\int_o^l \frac{(l-x)^2}{EI}\,dx + \omega_1 l \qquad (10)$$

From Fig. 2, it may be seen that

$$\int_o^l \frac{m}{EI}(l-x)\,dx$$

is the statical moment $A.a_2l$ of the area A with respect to end 2; similarly $\int_o^l \frac{x\,(l-x)}{EI}\,dx = B.b_2l$ and $\int_o^l \frac{(lx)^2}{EI}\,dx = C.c_2l$.

Using these expressions in (10), the following relation is obtained:

$$R = -A.a_2 + M_{21}\frac{B.b_2}{l} - M_{12}\frac{C.c_2}{l} + \omega_1 \qquad (11)$$

Incidentally, the useful equation

$$B.b_2 = C.c_1 \qquad (12)$$

may be written by simple inspection of Fig. 3 and 4.

M_{12} and M_{21} are now obtained by solving equations (6) and (11):

$$M_{12} = \frac{l}{C\,(c_2 - b_2)}(\omega_1 b_1 + \omega_2 b_2 - R) + \frac{A\,l}{C}\cdot\frac{b_2 - a_2}{c_2 - b_2}$$

$$M_{21} = \frac{l}{B\,(c_2 - b_2)}(\omega_1 c_1 + \omega_2 c_2 - R) + \frac{A\,l}{B}\cdot\frac{c_2 - a_2}{c_2 - b_2} \qquad (13)$$

These are the general slope deflection equations for member 1–2, expressing relations between end moments, end rotations, relative deflection and applied loads. They involve, in this general case, areas bounded by curves, also the centers of gravity of these areas. Determination of these elements by decomposition of areas into trapezoids will be found of ample accuracy in every case.


The following expression, giving the shear H in member 1–2 in the absence of superimposed loads, $(A = 0)$, is derived from equations (13):

$$H = -\frac{M_{12} + M_{21}}{l} = -\frac{1}{(c_2 - b_2)}\left[\frac{\omega_1}{C} + \frac{\omega_2}{B} - R\left(\frac{1}{B} + \frac{1}{C}\right)\right] \qquad (13A)$$

Fixed-End Moments, Stiffness and Carry-Over Factors


Equations (13) will be used to bring

(*Turn to page* 328)

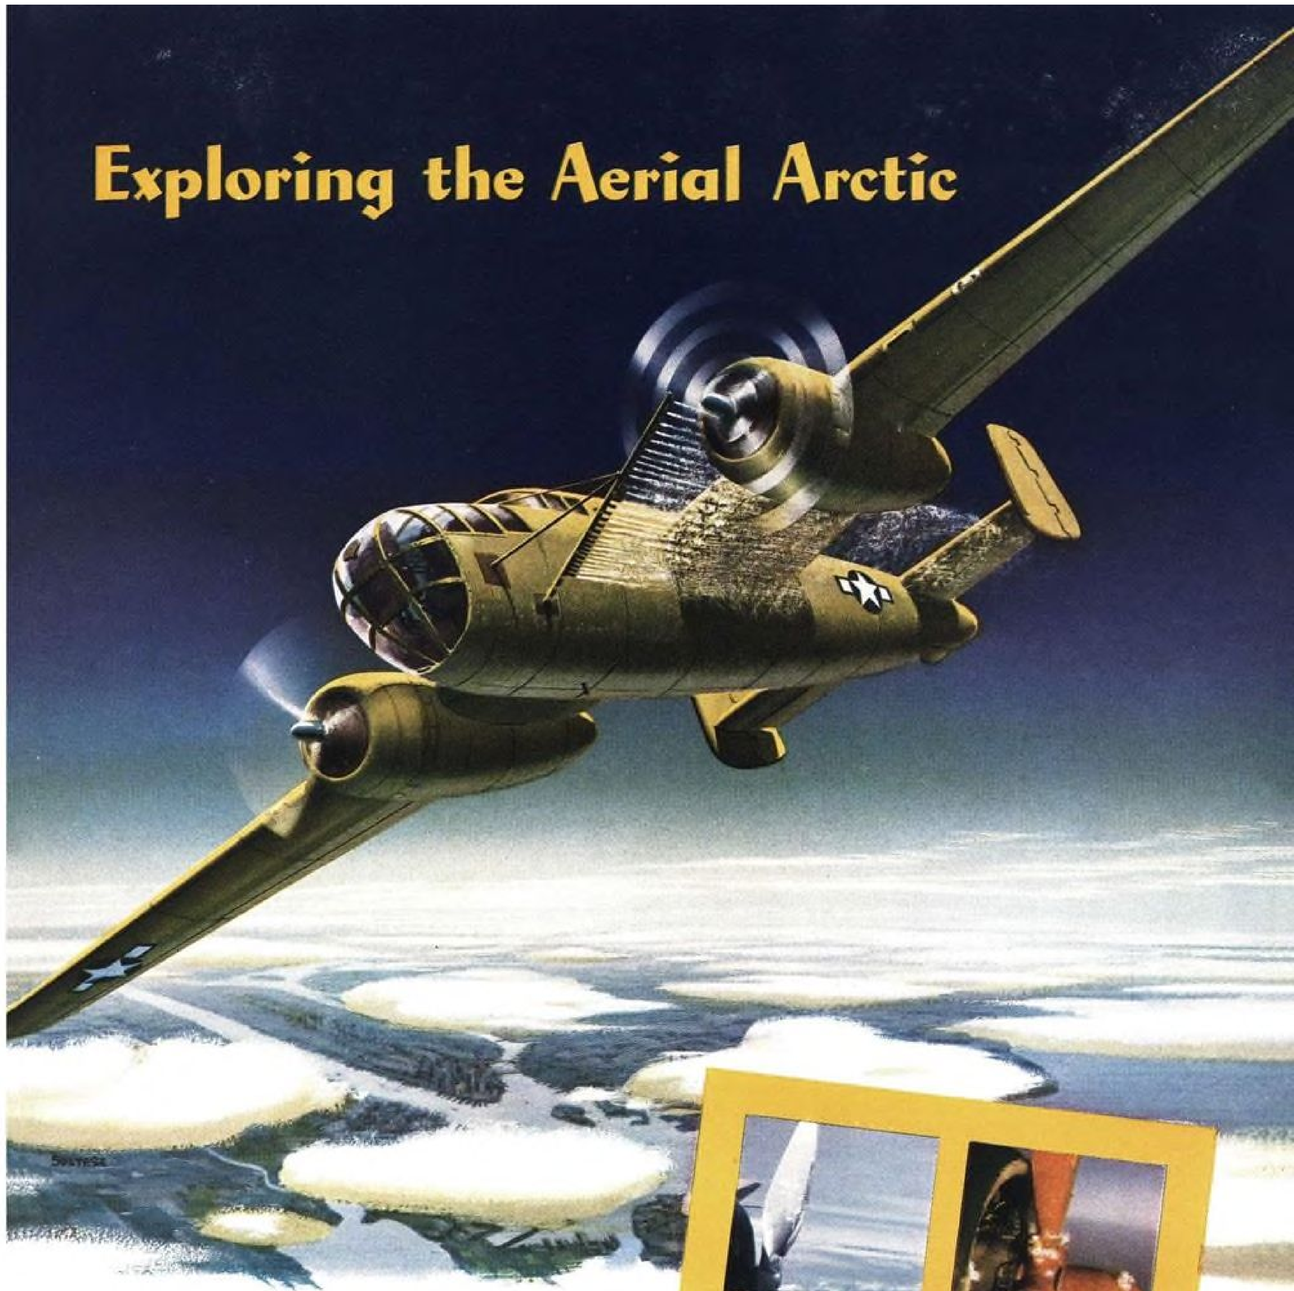


Above: B-25 test airplane with water-spray outrigger for inducing ice.

Constant study of ice prevention and elimination is one of the many phases of Curtiss Propeller flight research.

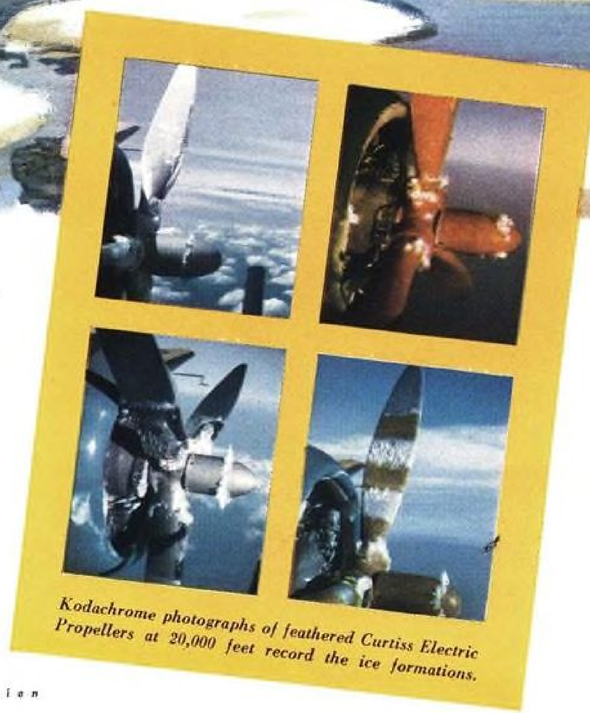

Kodachrome photographs of feathered Curtiss Electric Propellers at 20,000 feet record the ice formations.

Curtiss
ELECTRIC PROPELLERS
Curtiss-Wright Corporation • Propeller Division

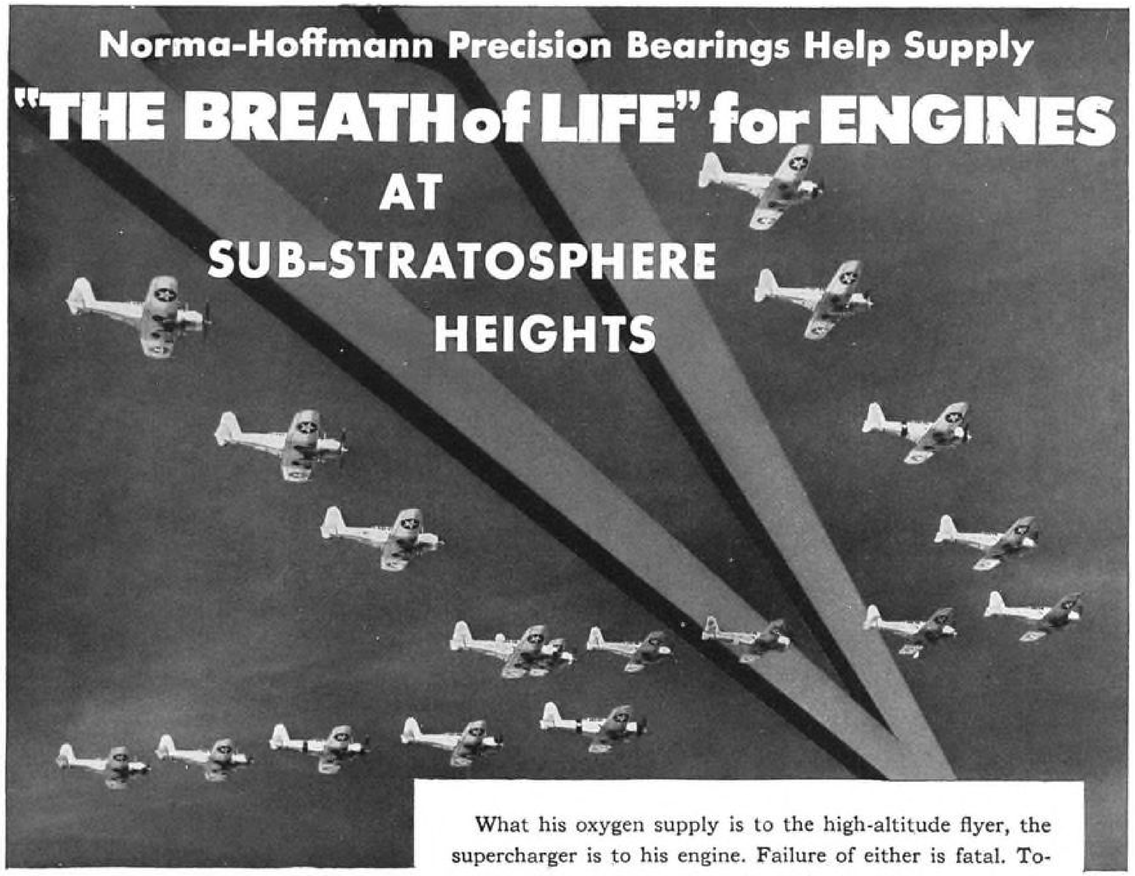

What his oxygen supply is to the high-altitude flyer, the supercharger is to his engine. Failure of either is fatal. Together, they make possible the high-altitude fighter planes and bombers that are playing so conspicuous a part in today's warfare.

In the use of anti-friction bearings in superchargers, as in so many other aviation applications, NORMA-HOFFMANN pioneered the way. The terrific speeds of supercharger operation —often as high as 60,000 RPM—demand that ULTRA-PRECISION long characteristic of NORMA-HOFFMANN BEARINGS. And today, not only in superchargers but elsewhere at vital points throughout the plane, NORMA-HOFFMANN PRECISION BEARINGS are doing their part in winning air supremacy for the Allied Air Forces in every theatre of war.

"Where the bearings MUST NOT fail"—in engines, control mechanisms, instruments, armament, radio equipment and other aircraft accessories—they are providing that combination of speedability, load capacity and dependability so vital to the unfailing performance of the plane.

Let our engineers work with you.

"NORMA-HOFFMANN"

PRECISION BEARINGS

BALL, ROLLER AND THRUST




NORMA-HOFFMANN BEARINGS CORP'N, STAMFORD, CONN. . . . FOUNDED 1911

"Pioneer Suppliers for 20 Years of Ultra-Precision Bearings for Superchargers"

TO WIN THE WAR—*Work—Fight—Buy War Bonds!*

Plant Power– Minus the Bottlenecks



By **W. D. DRUMMOND,** *Switchgear Specialist, Westinghouse Electric & Mfg. Co., Cincinnati*

When vital war production must be maintained day in and day out, power and lighting emergencies become intolerable. So Wright's Ohio engine plant called for an electrical distribution system that would be dependable—*plus*. Here's how that order was filled.

WRIGHT AERONAUTICAL CORP.'S aircraft engine plant in Ohio was designed for continuous operation—three shifts a day, seven days a week. Hence, to meet any emergencies (such as sabotage, fire, explosions, or apparatus failures) with the least possible loss of production time, no bottlenecks could be tolerated in the design of the electrical system.

A system must not become too complex; for if it does, the business of getting back to normal after a major disturbance would be too difficult. The more complicated the system, the more highly skilled must be the operating personnel.

Once the relative importance of the elements of the system was determined, it was a matter of good judgment in balancing the investment against the degree of reliability gained by a given system. This determined the extent of the duplication of feeders, looping of primaries, interconnection of secondaries, and the amount and type of switchgear.

Another thing: Growth of this and other war plants is unpredictable under present conditions, and many of these plants will turn to the manufacture of entirely different products in the coming peace. This consideration constitutes a further demand for maximum flexibility of the system adopted so that changes and additions can be made with the least expenditure of time and money and with no disturbance to existing production lines.


Disregarding their relative importance, the points in the electrical system at which bottlenecks of reliability and flexibility are most likely to occur may be listed as: (1) primary power supply, (2) main power supply to plant substations, (3) primary and secondary switchgear in the plant substations, and (4) the power and lighting transformers themselves.

The primary supply demands the ultimate in reliability of service. At least two sources of primary power are required to insure having power available at all times. In general, use of two paralleled supply lines to carry the entire plant load is avoided in war plants. Since the two supply lines usually originate at independent points on the public utility system, they must nearly always be synchronized before being tied together. In case of failure of one line, the plant would be at half capacity until the utility company could be notified and the lines re-synchronized.

The "preferred-emergency" scheme



Metal clad switchgear in main substation.

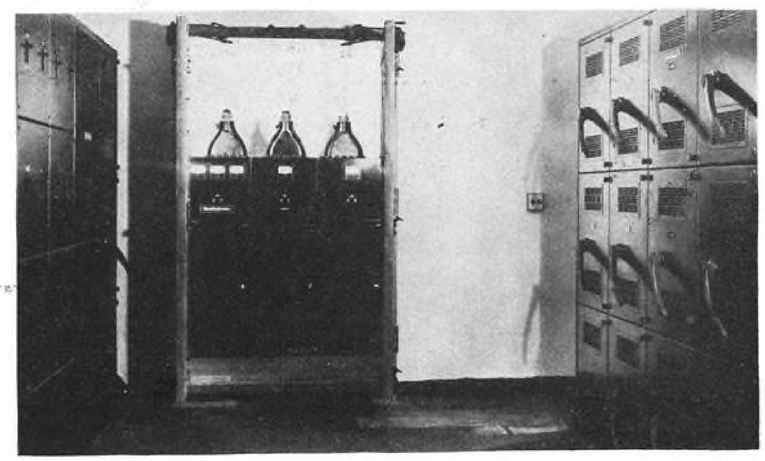


General view of switchgear in typical plant substation. Seen are 440 v. power switchboard (right), 208/120 v. lighting switchboard (left), and 13,200 v. metal clad switchgear (center).



Typical 440 v. power switchboard in plant substation with draw-out type air circuit breakers.



Close-up of draw-out type network protector in 208/120 v. lighting switchboard.

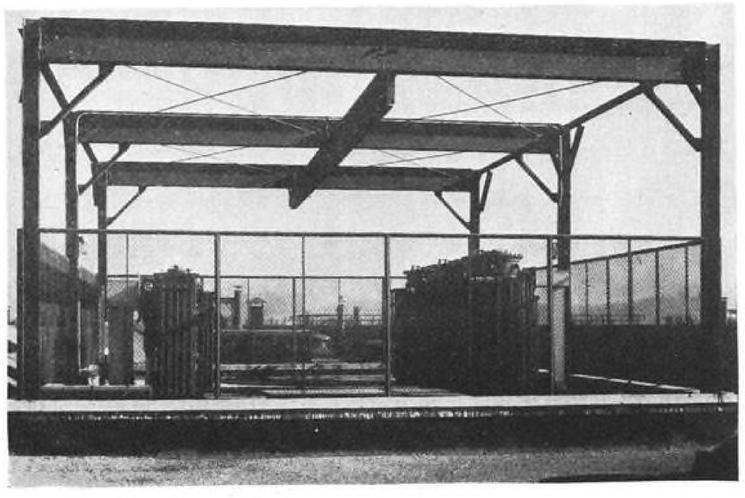

Typical roof-mounted outdoor power and lighting transformer substation.

supply might be dead when most needed.

The more reliable system of supply uses two continuously energized full-capacity lines each connected to its own load bus. Each bus can carry the entire load. Normal operation is to divide the load so that if one line or bus fails only half the load is lost—and that only so long as it takes to switch the "lost" load to the unfaulted bus. This is the plan used in the master substation at the Wright Aeronautical plant. The switchgear in the master substation is the metal clad type using 250,000 kva. interrupting capacity, electrically operated, vertical lift oil circuit breakers.

For maximum production, power must be uniform throughout the plant. To obtain uniform voltage regulation, it is necessary to bring power to the center of the load areas at high voltages and to keep to a minimum the length of the low voltage feeders to individual loads. Because of better voltage regulation full voltage starting of large motors permitted the use of inexpensive and simplified control and the use of fluorescent lighting.

The primary distribution voltage was selected to correspond with the local utility distribution voltages. It is to be remembered that war plants extend over large areas. Based on the load and the distance from the master substation to the plant substation, and using the available voltages of the local utility company, it was found that the load in the original group of buildings could be served most economically at 13,200 v.

With the increased load due to the recent expansion of the plant the supply voltage was changed to 66,000 v. and stepped down to 13,200 v. through two duplicate 20,000 kva. 3-phase transformers located in an outdoor switchyard and using the original master substation 13.2 kv. switchgear, except for the addition of two new feeders.


This change was accomplished while the plant was in full production, and savings in losses more than offset the increased cost of the high voltage switchgear and cables.

Duplicate 13.2 kv. feeders, one from each of the two plant buses in the master substation, serve the same group of two or more plant substations. Normally the two or more plant substations in a group are divided between the two feeders; but if one should fail, all the substations in that group can be switched to the remaining feeder.

At each plant substation there are three electrical systems to be controlled. These are the 13,200 v., 3-phase, 60-cycle primary distribution to the power and lighting transformers; the 480 v., 3-phase, 60-cycle distribution and interconnections, and the 208/120 v., 3-phase 4-wire, 60-cycle lighting distribution and network system.

Each plant substation consists of primary switchgear, separate 3-phase transformers for light and power, and the low voltage distribution switchgear. The ultimate installation at each substation will be two 500 kva. 3-phase lighting transformers and four 750 kva. power transformers.

Power and lighting transformers are located on roof areas, where they consume no production space and where the "rental charge" to the electrical department is lowest. Excellent ventilation is obtained without the use of fans and air cleaning equipment.

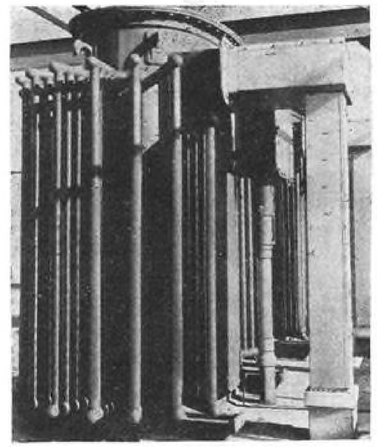

Close-up of 3-phase power transformers. High voltage cables and low voltage bus duct enter plant substation switchgear room directly below.

The primary switchgear and the secondary switchboards are located directly below the transformers so that the primary and secondary connections from the switchgear to the transformers are short and in only one direction—straight up.


Each primary switchgear is of the indoor metal-clad type consisting of eight units using manually operated non-automatic vertical lift oil circuit breakers of 100,000 kva. interrupting capacity. Four feeders circuits to power transformers, two circuits to lighting transformers, and two incoming line circuits are controlled from each group of primary switchgear.

The two incoming line breakers are mechanically interlocked so that only one breaker can be closed at a time. As stated before, there are two plant buses in the master substation. Both are always energized but cannot be tied together. Leaving the master substation are two feeders to each predetermined group of two or more plant substations, one from each plant bus. However, the two interlocked incoming line breakers at the plant substation allow the substation to be energized from only one of the main plant buses at a time.


This arrangement permits the equal loading of the master substation buses by shifting the heavily loaded substations and the lightly loaded ones so as to balance the entire load on the two plant buses. A further advantage is that the open breaker may be substituted in case of failure of the closed incoming line breaker.

The low voltage power distribution switchboards are of the metal enclosed type using manually operated draw-out air circuit breakers. All breakers are of 50,000 amp. interrupting capacity. There are four transformer breakers, two station tie breakers, one by-pass

(*Turn to page* 316)

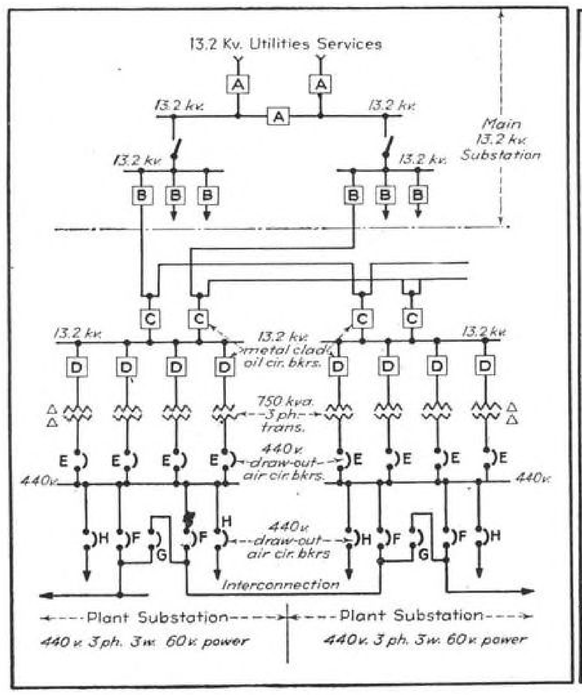

Schematic diagram of power interconnections.

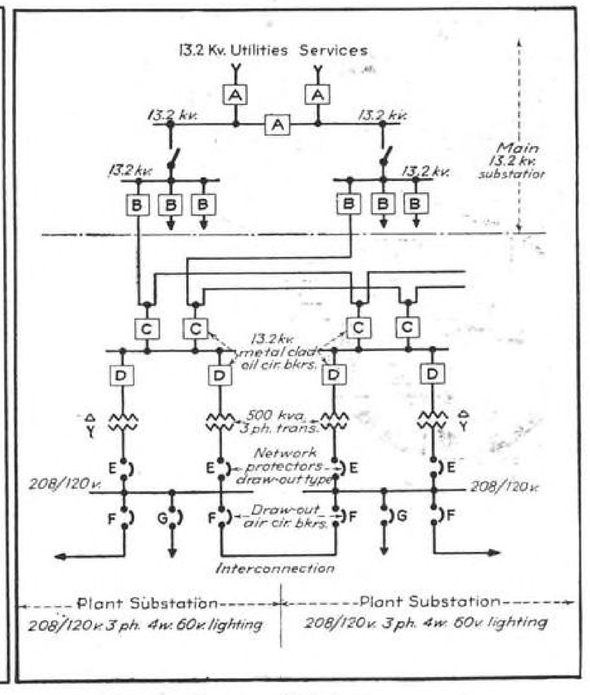

Schematic diagram of lighting interconnections.

Comfort by the foot...



AN air transport plane bristles with gadgets for a passenger's comfort . . . from individual "air-conditioning" to non-skid paper "pantaloons" for the pork chops. But some of the most important contributions to passenger comfort are never seen—a set of "comfort instruments" in the cockpit. The rate-of-climb indicator, for instance, gauges the gradual 300-feet-per-minute descent at all airports, which saves passengers from the discomfort of a too-rapid change of air pressures. The accelerometer is another "comfort gauge"—measuring the relative roughness of the air, assisting pilots in keeping to the smoother flight levels . . . and the sensitive altimeter helps them maintain those comfort levels. In the design and engineering of such precision aids to aircraft operation and navigation—civil and military—Kollsman has excelled for fifteen years.

IN THE PASSENGER PLANES OF TOMORROW—*with their pressurized cabins and other comfort features—instruments will play a larger part than ever before, expanding their scope and usefulness far beyond anything we know today. Kollsman engineers are constantly developing new and better aircraft instruments which will help widen and extend tomorrow's skyways for a new era in aviation.*




THE KOLLSMAN VERTICAL SPEED INDICATOR, *often called the "rate of climb" indicator, is one of the basic instruments for maintaining level flight when the horizon is not visible and for learning the rate of altitude change.*

KOLLSMAN AIRCRAFT INSTRUMENTS

PRODUCT OF

SQUARE D COMPANY

ELMHURST, NEW YORK GLENDALE, CALIFORNIA

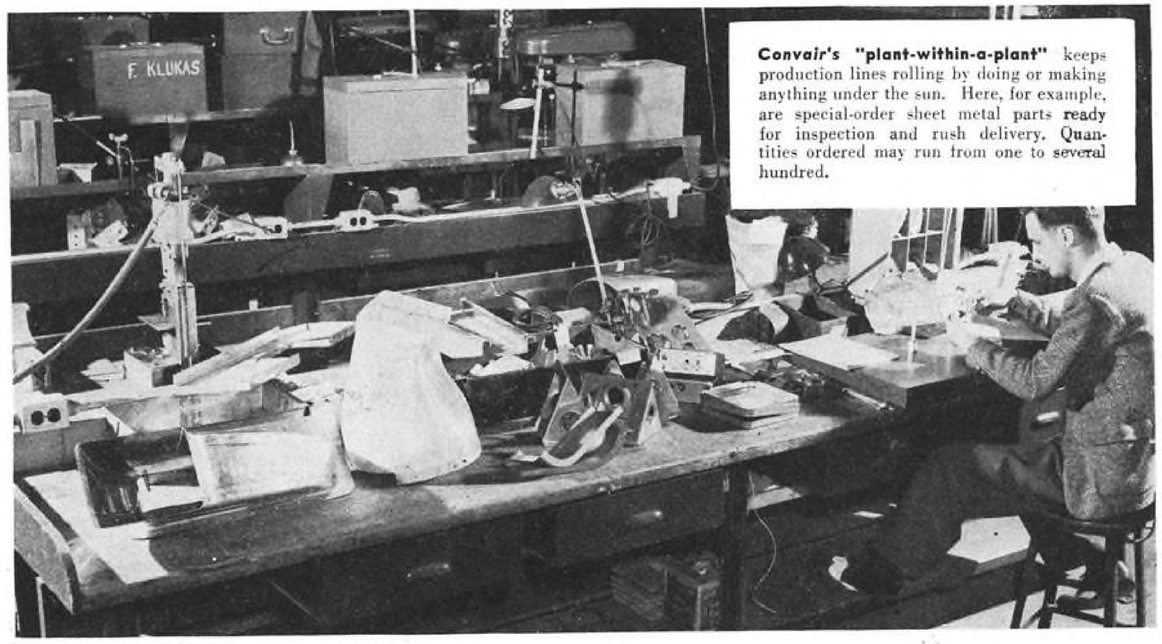

Convair's "plant-within-a-plant" keeps production lines rolling by doing or making anything under the sun. Here, for example, are special-order sheet metal parts ready for inspection and rush delivery. Quantities ordered may run from one to several hundred.

This Plant-Within-Plant Assures Peak Production

"Little CV" salvages, fixes, and builds anything—quickly nips production-flow jams before they can begin. Making the unusual normal and emergencies routine is the particular knack of this miscellaneous parts department, and the maxim of its skilled staff is "Name it and you can have it."

THE MISCELLANEOUS PARTS DEPARTMENT of Consolidated Vultee's San Diego plants has earned its nickname of "Little Consolidated Vultee" by being, in effect, a virtual plant within a plant In miniature, it duplicates almost all of the production capacities of the San Diego division in the fabrication of parts and small subassemblies.

In addition, it functions as a small salvage department, a neighborhood "fix-it" shop to handle emergency repairs to tools and machinery whose continued disability would seriously hamper the flow of production, a job machine shop for building experimental tools and jigs, and a spare parts manufacturing plant to supply extra parts for current models and for those planes of an earlier period which are still in active service around the world.


As if this were not enough, the miscellaneous parts department is also given the job of repairing the various parts, large and small, that have been damaged in production, that have been orphaned by design changes, or that have been misworked by other departments or subcontractors but which can be reclaimed by a little expert tinkering. Damaged parts may range from



Typical of varied work turned out by machine tool section of miscellaneous parts department at Consolidated Vultee's San Diego Div. are these on final inspection bench. They include pulley bracket castings, nose wheel casting, milling machine arbors, punch press dies, hi-cycle drill bushings, draw-in collets for bench lathes, and variety of blanking dies.



Duplicating in miniature nearly all facilities for fabrication of parts and small sub-assemblies, "Little CV" has but one cardinal rule: Orders must be in writing. Part of machine tool section is shown in foreground, portion of sheet metal section in right background.

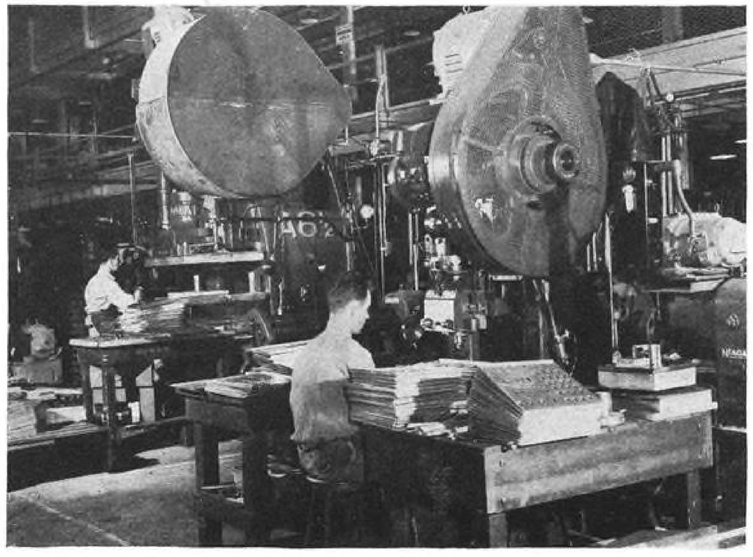

Spare parts orders often don't run according to schedule. So, to help keep *Liberators*, *Catalinas*, and *Coronados* in service throughout the world, plants' "fix-it" shop steps in on short production runs, such as this blanking operation on airframe subassemblies.

a bent back on a pilot's seat to the entire outer wing panel of a B-24 *Liberator* bomber.


Altogether, there are nine classifications into which the activities of the department tend to fall. But within these general groups there are complex variations of work which result from the fact that no job is sent to this department unless it is an emergency of some sort or is a problem that has baffled other departments.

Actually, there are two such departments in the San Diego division; one serves Plant 1, the other Plant 2. Although there are some differences in equipment, personnel and type of work handled by each (the result of Plant 1 being engaged largely in assembly while Plant 2 is devoted entirely to the manufacture of parts and subassemblies) the general operation of both is sufficiently similar that they can be discussed as one unit.

The only fixed rules governing operations at miscellaneous parts are that all orders for work must come from production control in writing and that its members draw regular pay checks at the same time as other Consolidated Vultee employes. Beyond these two points, anything can happen—and frequently does—in the course of dealing with one production crisis after another day after day. It is a department where the unusual is the normal, where emergencies are routine, where improvization is the rule, and where no one gets bored by having to do the same old thing in the same old way day in and day out.

Here, for example, are a few of the orders that come flooding in at the start of any ordinary day:

Metal bench needs a drill fixture . . . . Sheet metal wants a production sample; is returning one made yesterday for alteration . . . . Fabrication calls for a multi-punch bar . . . . The tool department says, "Rush 20 drills" . . . And (take a breath) Production must have a Micarta strip, a rubber insulation strip, a collar for the nose wheel emergency lock, a latch for the rear gun stowage, a latch for the nose landing-gear down lock, a bracket for engine control pulleys, 100 screws with slotted heads, 50 channels for bomb racks, a chrome moly spacer, and two drill templates . . . . What's more, there are also orders for a wood router form that will be scrapped when the permanent tool is completed, a dural form block for temporary use, a Kirksite die for permanent tooling, and 12 scarf mill table clamps.

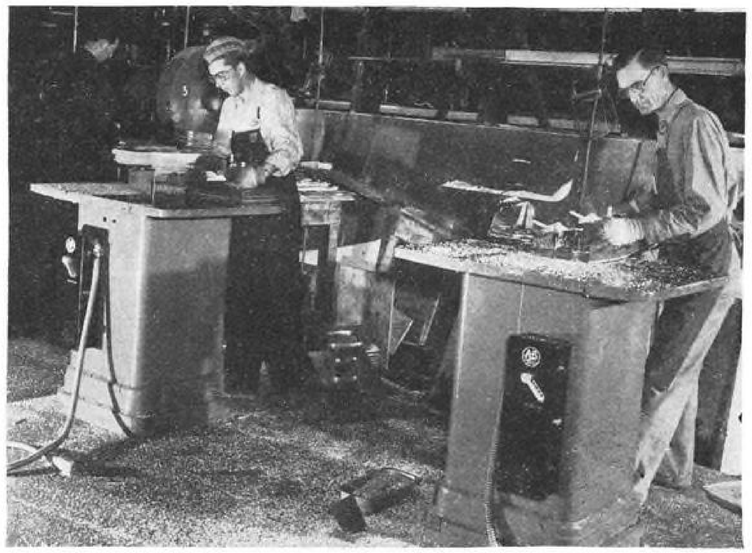

Routing of sheet metal parts on a production order. Request for this job arrived with order for emergency repair of regular production tool.

This by no means exhausts the list, but the items are representative. Not included are the orders for the salvage of parts, fastenings, and fittings. For instance, there's that box of bolts orphaned by a design change. By cutting these bolts down to 3 in. and re-threading them, they can be returned to stock for use on another ship. Five pilot's seats are on another bench. In shipping the backs were bent. They will be taken apart, the damaged parts replaced, and the seats returned to stock as good as new.

To handle this multitude of problems a crew composed of tool and die makers, machinists, sheet metal workers, and expert assemblers has been gathered and trained to work as a team. Eligibility to work in this department demands skill, versatility, the requisite common horse sense, and plenty of mechanical imagination.


Among the materials regularly worked in "Little CV" are all the aluminum and magnesium alloys, wood, steel, brass, copper, rubber, Kirksite, and plastics. These may be in bars, rods, tubes, sheets, castings or forgings.

Tools employed include lathes in all sizes from inexpensive 9-in. bench mod-


(*Turn to page* 299)




On some orders one man will follow through from receipt of written order to delivery and to inspection—such as with this repair job on Z-section joggle of punch press. Other work, however, may require teams of several of department's skilled technicians.

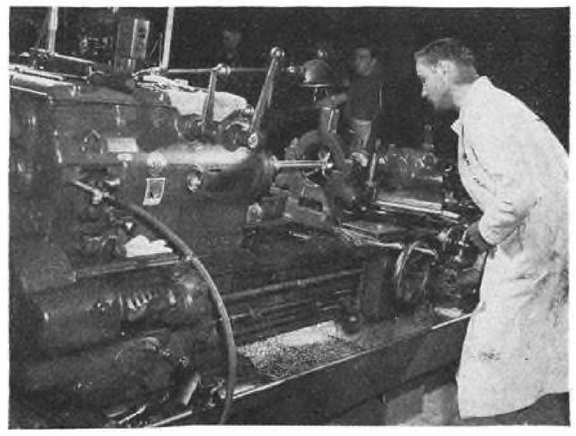

Established . . . eliminate bottlenecks by salvage, repair, or manufacture, miscellaneous parts does anything from rough carpentry to machining operations down to .0001 tolerances. Here, milling machine arbor is turned on 30-in. lathe.

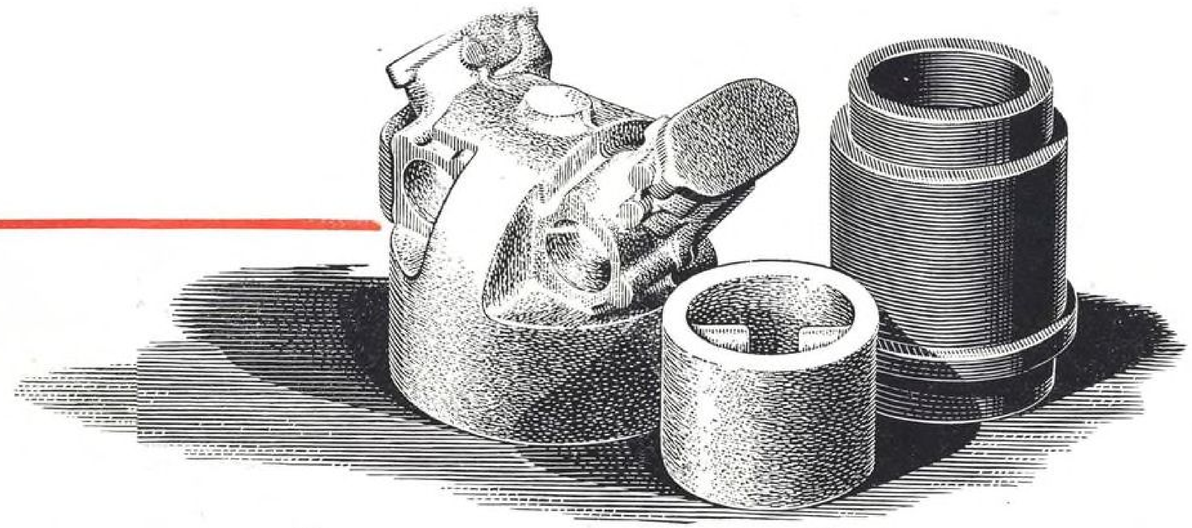

Precision heat treating of Aluminum Alloy and Steel

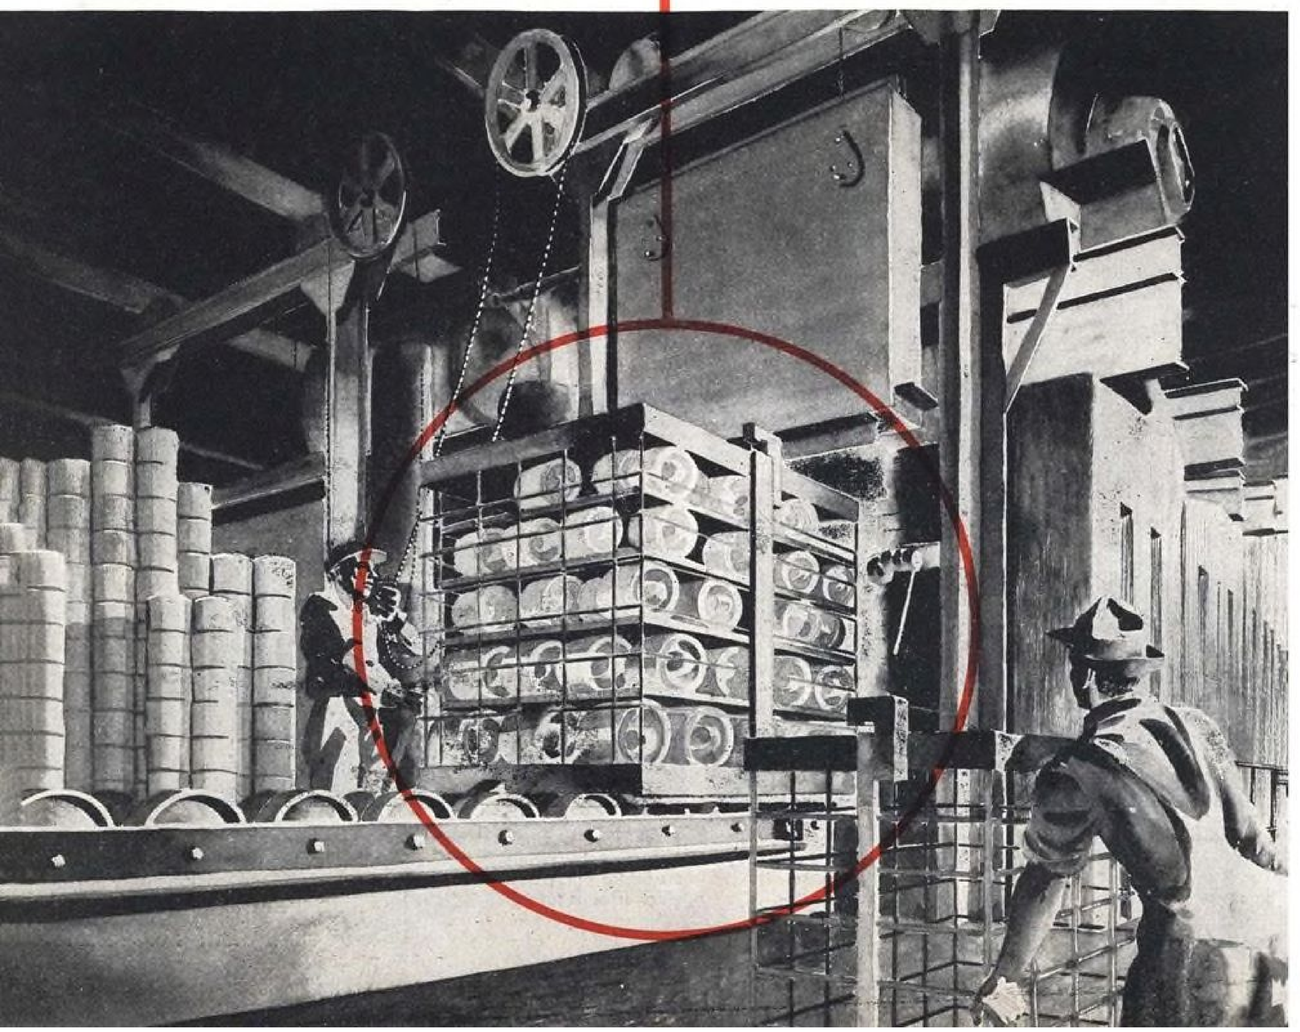

AIRCRAFT FORGINGS

Precision heat treating is the *Siamese twin* of expert forging. Both are indispensable in Tube Turns' large scale production of aluminum cylinder head, aluminum piston and steel barrel *forgings* (shown above).

These are no ordinary forgings. Their end use is crucial. Their production must be flawless. *Accurate heat treating* is especially imperative, because allowable variations from specified hardness are extremely small in these vital parts. At Tube Turns, we maintain exceptional production and laboratory controls over *every* heat treating step to assure the best possible grain structure. And we do it in step with pressing, around-the-clock production schedules.

Tube Turns has earned a unique reputation for turning out difficult aluminum and steel forgings with seemingly impossible precision and promptness. We shall welcome inquiries from forward-thinking engineers and manufacturers who need forgings, or forging ideas, now or in the future.

TUBE TURNS (Inc.) **LOUISVILLE, KENTUCKY**

TUBE TURNS

Forgings for Industry

ARMY E NAVY M



Wherever you find the Navy, you find Berryloid-finished fighters and bombers. No other branch of our fighting forces demands greater protection and durability in finishing materials. More than a quarter century's experience has proven to Navy specifications officers and inspectors that no other finishing materials combine so many performance and application advantages. Berryloid is the standard of quality everywhere.

BERRY BROTHERS, INC.

DETROIT, MICHIGAN • WALKERVILLE, ONTARIO

BOSTON • JERSEY CITY • CINCINNATI • CHICAGO • ST. LOUIS • INGLEWOOD, CALIF.

MONTREAL • WINNIPEG • TORONTO

BERRYLOID

AIRCRAFT FINISHES



Women being trained for Vega engineering jobs in alternate nine-week terms at California Institute of Technology and in company shops come in practical contact with classroom trainer plane. Lucia Van Buskirk, former interior decorator, records a measurement taken by 21-yr.-old Martha Robertson, fresh from college.

Engineers Made to Order

By **E. V. GUSTAVSON,** *Personnel Engineer, Vega Aircraft Corp.*

With trained technical personnel at a premium and becoming scarcer, Vega has established special courses to adapt the inexperienced and the unskilled to specific aircraft production jobs.

THERE CERTAINLY AREN'T enough trained engineers. At the same time that increased production has required more of them, the supply of technically trained men has not only been inadequate but is even decreasing.


Every aircraft company is faced with the distressing fact that the armed forces are absorbing a large percentage of engineering graduates while the number of experienced men in the industry itself is diminishing.

To counteract this shortage, Vega Aircraft Corp., as in the past, is now training selected students in supervised specialized courses.

Recently a new, streamlined training program with a long-range objective was instituted. With the cooperation of California Institute of Technology, Warren G. Furry, Vega staff engineer in charge of training in the engineering branch, organized a full time, 52-wk.-course in aircraft engineering fundamentals now being given to forty engineering employees. This course is designed to furnish the minimum technical education required for the selectees to be upgraded to jobs requiring more experience or training.

All subject matter is of college level and is being taught by instructors of Cal. Tech. and engineers from Vega. The courses have been stripped of all non-essentials and concentrated so as to approximate a full college course in the engineering subjects chosen.

Special emphasis is made on layout practice, mathematics (including calculus), aerodynamics, and structures. Shop work is also featured, as well as design changes which are demonstrated on the all-metal training plane at the school. In addition, lectures are being given by Vega engineers on selected subjects such as process and production engineering, materials, hydraulics, structure design, and stress analysis. Thomas V. Davis, Vega engineer, is on loan to

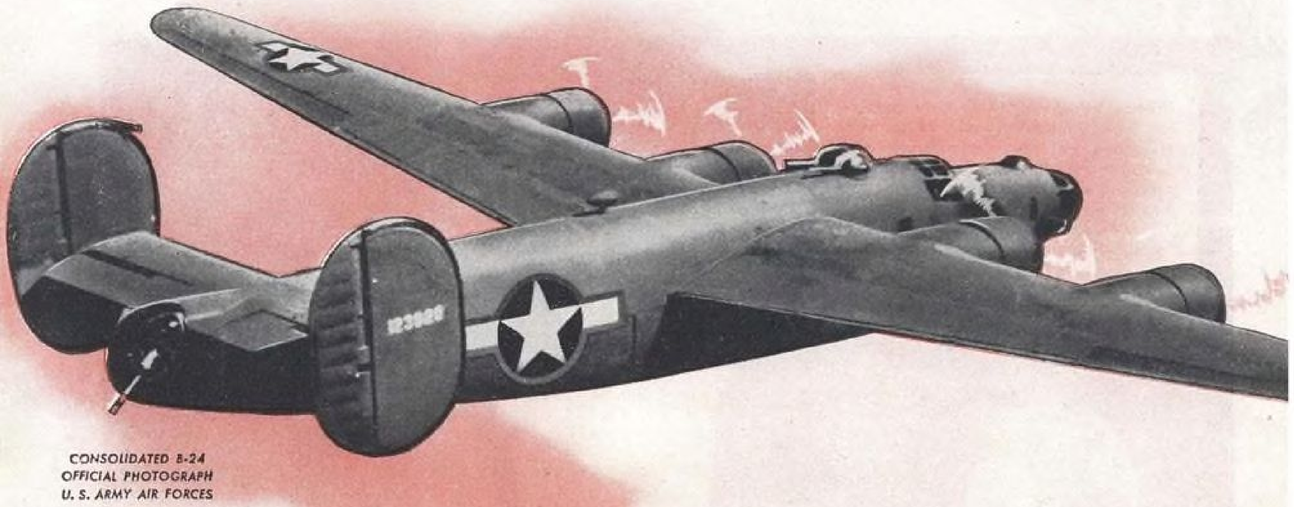

CONSOLIDATED B-24
OFFICIAL PHOTOGRAPH
U. S. ARMY AIR FORCES

MAKE THEM MORE AND MORE AUTOMATIC

TO INCREASE THEIR FIGHTING POWER★★

White-Rodgers automatic temperature modulation equipment relieves pilots for greater concentration on fighting power by providing completely automatic control of:

1. **Engine cowl flaps (both air and liquid cooled).**
2. **Oil cooler shutters or flaps.**
3. **Cabin temperature (both super-charged and normal).**
4. **Carburetor air temperature.**

Upon request, engineering data will be furnished to manufacturers requiring controls for the above or other temperature applications.

LET'S GO! U.S.A. · KEEP 'EM FLYING!

WHITE-RODGERS ELECTRIC CO.
SAINT LOUIS, MO.

the Institute as coordinator of the program and instructor in certain specialized aircraft subjects.

An unusual feature of this course is that the engineering employees attend classes full time for nine consecutive weeks on the company payroll at their regular rates and then return to project work in the engineering branch for an alternate nine-week period. The advantage of this plan is obvious. It gives a constant check on the adequacy of the training and on the progress being made by each student.

The training group is divided into two sections of twenty members each. While the over-all program requires a year, the total time spent in training is thus only six months in alternating nine week periods. The first section studies while the second practices.



Layout practice is also given considerable time in this one year work-practice course being given to 40 women.

The Women Win

Prior to the inception of this program, the training section of engineering personnel interviewed supervisors of the various design projects to obtain draft exempt selectees with the desired qualifications. All of the final selections were women. Special consideration was given to personality, adaptability, and leadership, in addition to quality of work and progress made.

A total of 130 women were selected from original interviews with supervisors. Each received a questionnaire on which the proposed training course was outlined. The candidate was asked to check a list of subjects allied to engineering and indicate those in which she had completed at least one course. The questionnaire also contained space for previous experience, including past work at Vega.

Returned were 125 questionnaires. From these, it was found that approximately seventy-five women had completed college mathematics through trigonometry and that some two dozen had taken mathematics through calculus.

Approximately three weeks were devoted to making the selection of the twenty women who were to form the first group. Supervisors were again consulted on the information furnished through the questionnaires. Each of the 125 women was interviewed individually and, in some cases, jointly with her supervisor.

When the final selection for the first class had been made, the twenty women were given an examination in mathematics which covered fundamentals of algebra and plane geometry. The purpose of this test was to determine the needs of the group so that the mathematics course could be planned to cover them. The women were also given a mechanical aptitude test to ascertain their rating at the beginning of the course. A similar test is given at the end of the period to note whether or not aptitudes improve with training.

Of the twenty initially selected, six had college degrees, two had completed three years of college, three two years, and four one year. Four had finished high school, and one had had seven years of training at an art institute.


The age range was 18 to 49 yr. Fourteen of the women are single; five are married. The average length of time the group has worked for Vega is seven months, the longest eighteen months. Past experience includes interior decorating, laboratory work, teaching, buying, bookkeeping, secretarial, accounting, pattern designing of crystal ware, acting, sub-division mapping, and homemaking. Qualifications and experience of the second training group of twenty follow closely those of the first group.

Engineers Converted

The problem of training first confronted the Vega engineering branch in the spring of 1941. At that time it was necessary for the branch to undertake a rapid expansion out of proportion to its then relatively small size.

With companies facing war expansion, a major problem was the procurement of engineers capable of carrying aircraft design responsibility. Vega


(*Turn to page* 253)

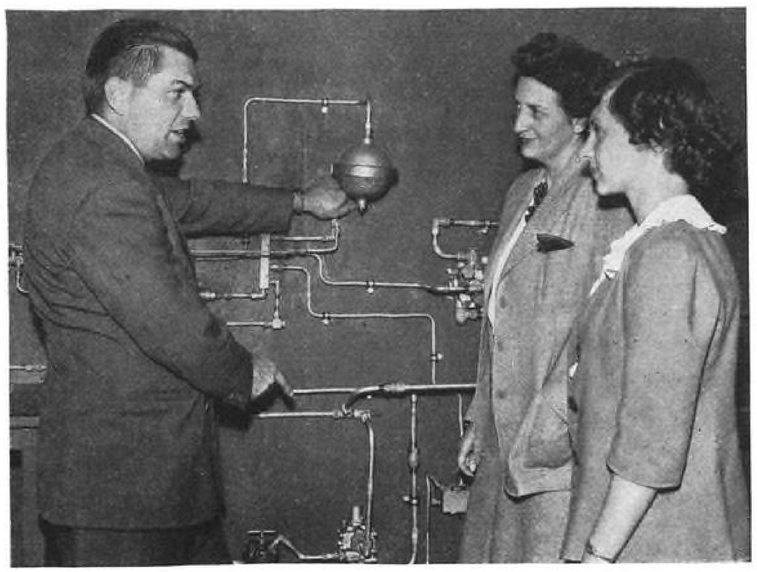

Details of hydraulic system are traced for Students Gladys Auld and Edith Brownwood by Ellis Wampler

MEETING EVERY *Auxiliary Power* NEED



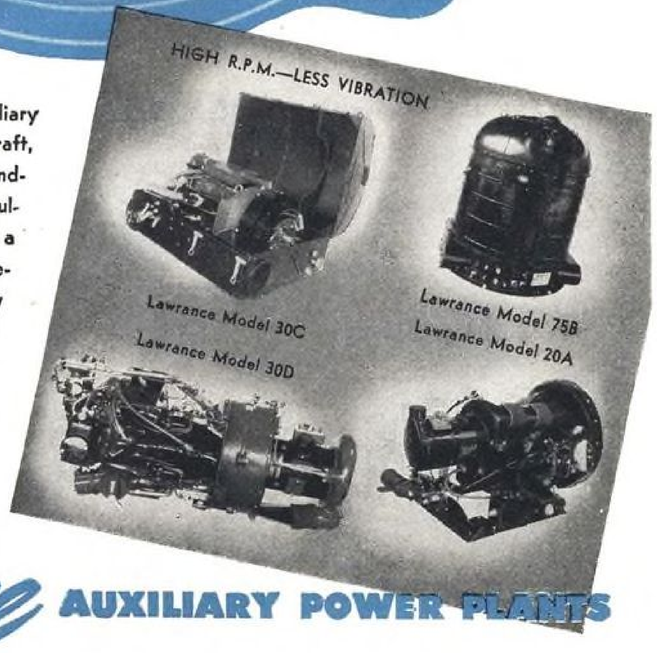

Light, compact and versatile, Lawrance Auxiliary Power Plants are now serving aboard aircraft, tanks, blimps and PT boats, producing a dependable flow of electrical power to perform a multitude of vitally important duties. There is a Lawrance model, designed to the special requirements of its installation, to meet every Auxiliary Power need. The quality that is built into every Lawrance Auxiliary reflects a background of research and engineering experience unsurpassed in the field. Look to Lawrance for Auxiliary Power.

LAWRANCE POWER

Lawrance AUXILIARY POWER PLANTS


LAWRANCE ENGINEERING AND RESEARCH CORPORATION • LINDEN, NEW JERSEY


Noorduyn Production Time-Savers

By JAMES MONTAGNES
"Aviation's" Canadian Correspondent

How new "twists" speed up "Harvard" and "Norseman" output.

IDEAS WHICH ARE SAVING TIME, materials, and labor in manufacture of NAA *Harvard* trainers and of Noorduyn *Norseman* (U. S. Army UC-64 utility cargo transport) are shown on this and the following page at work in the Montreal plant of Noorduyn Aviation, Ltd. Other practical developments (not pictured) include construction of router templates with metal tips instead of conventional ⅝ in. metal countersinking of nut-plates, saving 6 hr. formerly required to countersink plates on every plane; and covering surfaces around doors with masking tape when Neoprene is cemented in place, saving 15 min. per door.

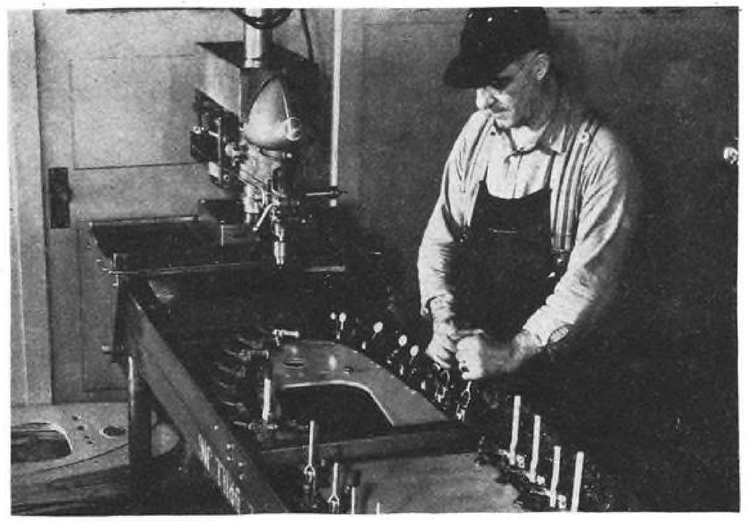

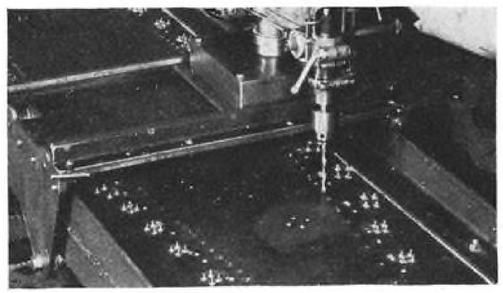


Toggle clamps (above) instead of thumb screws hold four instead of one wing center plate in jig. One man works drill press (left) which rolls along edges of jig, replaces two workers with hand drills. Jig can be inverted for drilling holes from back. Production increased 240 percent while 140 hr. were saved for every hundred plates made.



Roller machine reminiscent of laundry wringer squashes down and breaks off burrs around holes drilled in aluminum sheet. Job formerly required work on every hole with hand drill.




This squeeze riveter eliminates the bucker. And suspension cable seen here supporting the heavy tool makes the work light enough for a woman.

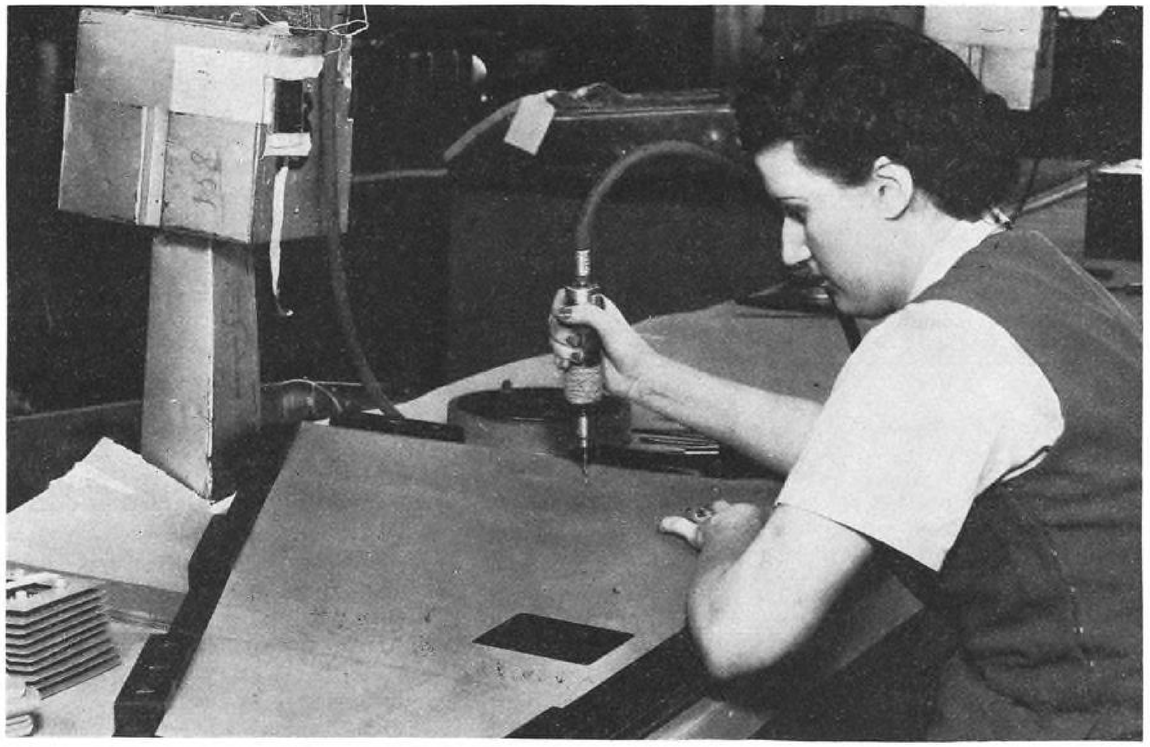

Replacing man who used to measure and cut holes in prefabricated stringers and gussets for horizontal stabilizers, this girl lays same parts out in Masonite jig. Then she fastens previously-drilled skin over them with screws. Drill inserted through holes in skin thus cuts stringers and gussets in proper alignment.




With two tables (above), one being loaded while other is used, this 1,320-ton sheet metal forming press is kept in continuous operation. Loaded table automatically pushes one with finished parts out of way. Safety devices include photo-electric eyes.

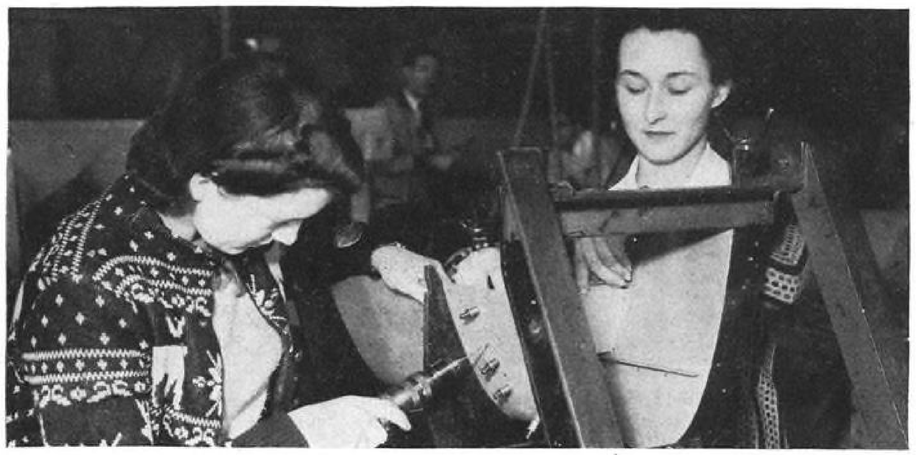

Jigs suggested by workers have increased prefabrication speeds of cantilever subassemblies on NAA *Harvard* trainers. Result: Two shifts now produce as much as eight or ten used to.

How LIGHTER airplane tires carry HEAVIER loads

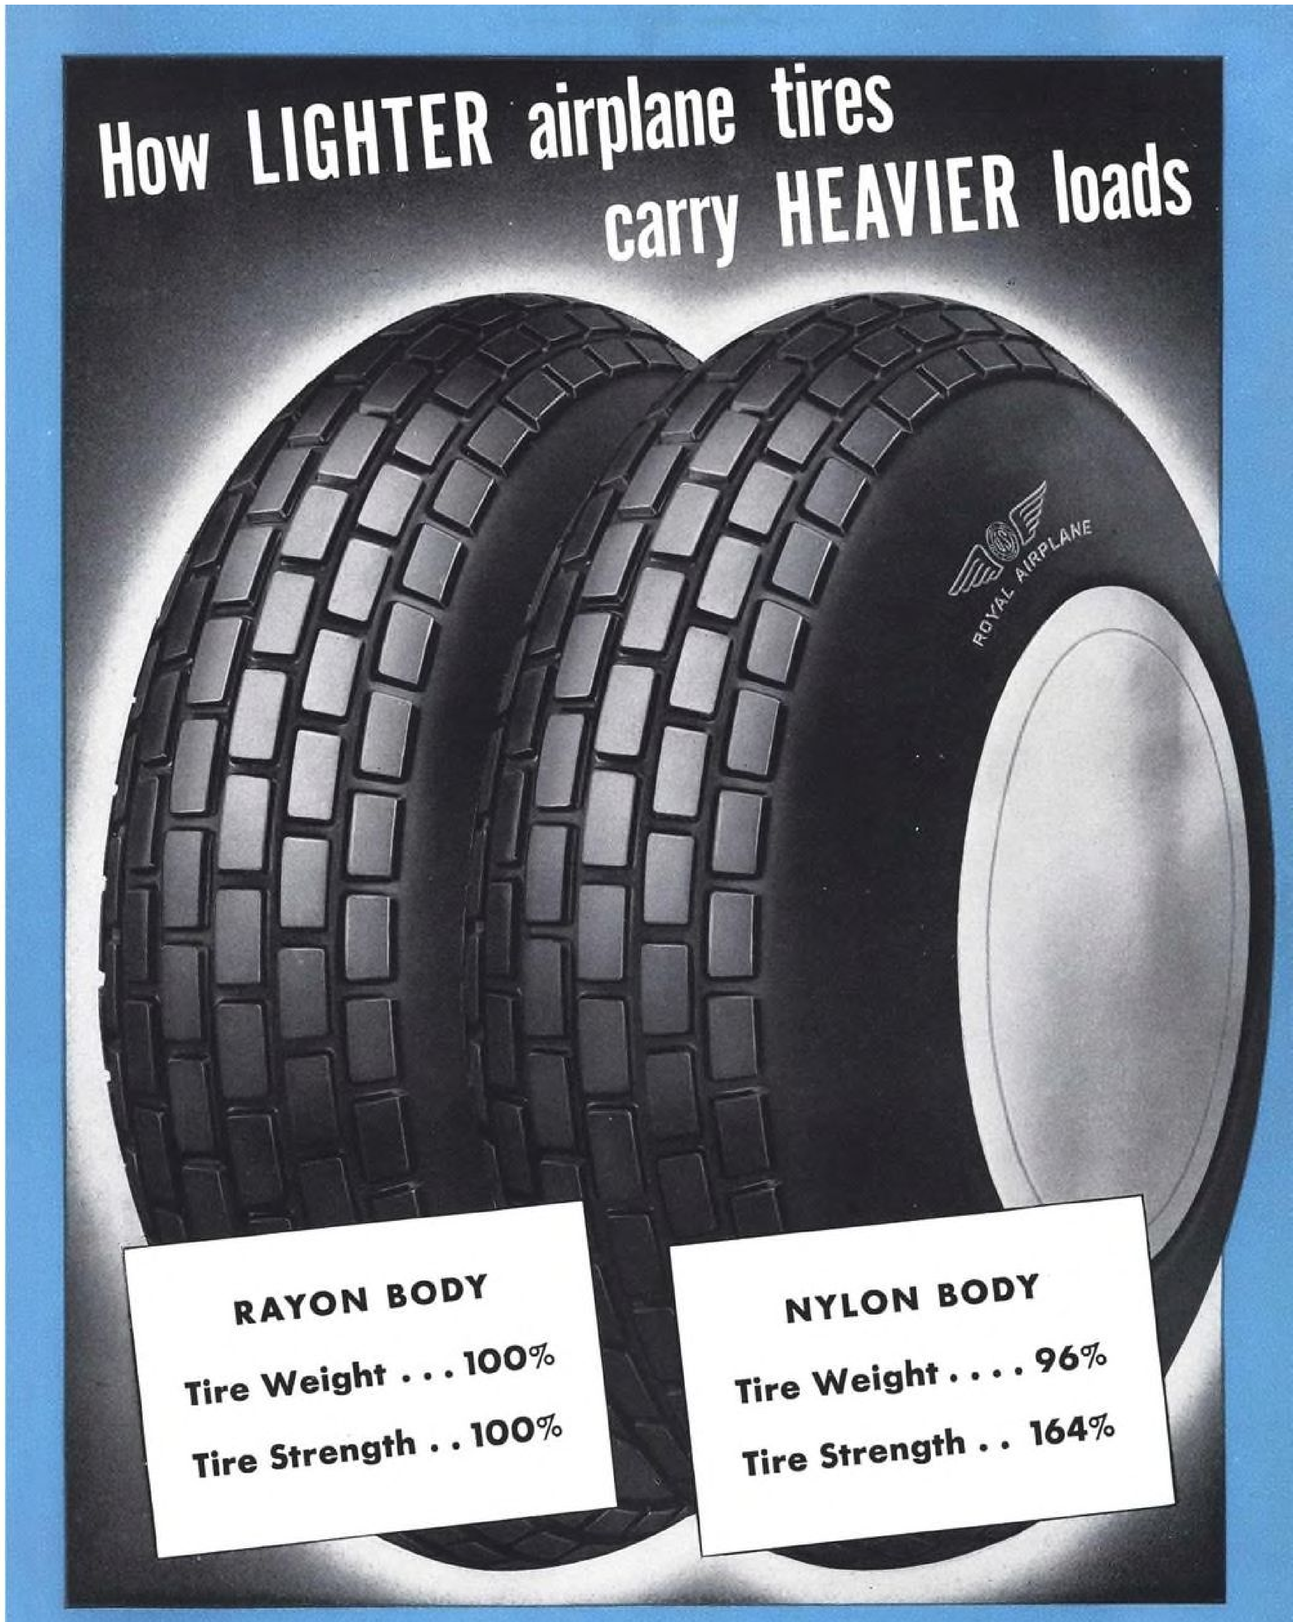

RAYON BODY
Tire Weight . . . 100%
Tire Strength . . 100%


NYLON BODY
Tire Weight 96%
Tire Strength . . 164%

UNITED STATES RUBBER COMPANY
1230 Sixth Avenue - Rockefeller Center - New York 20, N. Y.

These Four Great War Planes Show How Lighter, Stronger Tires Now Carry As Much As 50% More Weight

HOW "U. S." TIRE ENGINEERS ANSWERED THE NEED FOR TIRES THAT CAN TAKE THE INCREASED WAR LOAD . . . WITHOUT INCREASING TIRE SIZE



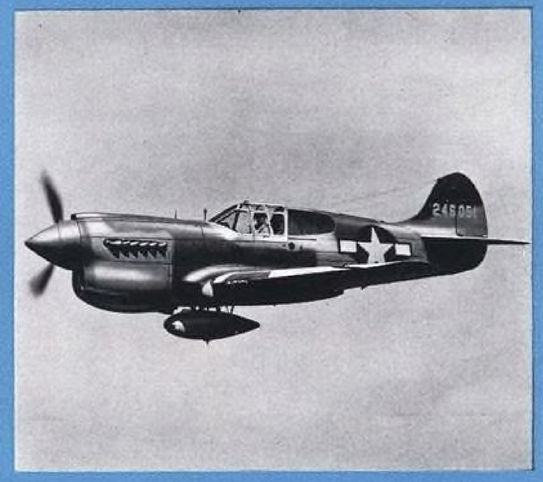





P-39 Bell Airacobra—From its first, dramatic introduction in 1940, the P-39 with its tank-destroying 37mm. cannon has been among the fighting favorites of our Army Air Forces and those of our Allies. It has proved its fighting power in the Aleutians, the South Pacific, North Africa, Russia—in every theater of the war. When first produced, its rated gross weight was about 6000 pounds.

Today with heavy machine guns replacing light, with bullet-sealing fuel cells instead of aluminum tanks, with greater stores of gas and ammunition and added plane and pilot armor, this fighter today weighs 7404 pounds.

But the same size tire, 26 x 6, had to carry the load. Tires with cotton cord bodies would not do the job. "U.S." tire engineers, who pioneered rayon cord tires with the Army and Navy air arms, *decreased* tire weight, added the stamina needed to carry a third more weight—without adding even a fraction of an inch to the over-all tire size.

P-40 Curtiss Warhawk—The record of the "Flying Tigers" knocking ten enemy planes out of the sky to one Warhawk lost, added to distinguished performance in every theater of the war, entitles the Warhawk to a place in the front line of America's great war planes.

Armed at first with but two machine guns firing through the propeller, today's P-40 carries six heavy guns, a thousand-pound bomb load and heavier armor protection for the plane and pilot. Bullet-sealing fuel cells, heavier, more powerful engines and super-chargers, along with other new equipment, have raised the 1940 weight of 6789 pounds to 9000 pounds today.

The 30" tire size that carried the original weight has been engineered to carry this increased load at higher landing speeds. Again, lighter U.S. Royal Rayon Cord tires replaced heavier cotton tires that could not shoulder the load. And not one fraction of an inch was added to the over-all tire size.

B-24 Consolidated Liberator—Over the Ploesti oil fields and the railway yards of Rome, over every Axis center of war activity, the Consolidated Liberator has made the might of American air power felt with devastating effect.

In 1940, the B-24 was rated at 41,000 gross weight. Today, published figures rate it at 65,000 pounds, an increase of over 50%. From a half-dozen machine guns to a complement of over a dozen with four power turrets, from aluminum gas tanks to bullet-sealing fuel cells and with ten tons of bombs, this great bomber has grown into one of the most potent offensive weapons of the United Nations.

Even with a 50% increase in load, the 56" tire size that equipped the original Liberator still does the job. Lighter, U.S. Royal Rayons replaced heavier, bulkier cotton cords. And today, more "muscle," more strength to carry the thirty-ton load is built into new Nylon tires supplied in large quantity by "U.S." to the Army Air Force.

B-17 Boeing Flying Fortress—The very words, Flying Fortress, have become the symbol of deadly, long-range bombing power. The achievements of the Fortress and its heroic crews in precision bombing have earned it a distinguished place in the history of World War II.

In 1940, the rated gross weight of the Flying Fortress was 45,470 pounds. Today with thirteen heavy guns, with bullet-sealing fuel cells carrying long-range supplies of gas, with ten tons of bomb load, the Fortress weighs approximately 65,000 pounds—an increase of over 45%!

In 1940, the Fortress landed its 45,000 pounds on 19.00 x 23 tires. Today, with 65,000 pounds and more, the tire size has been increased only slightly. "U.S." tire engineers first built tires with rayon bodies as gross weight increased. They carried the load over rough landing fields at higher and higher speeds. Then came U.S. Royals with Nylon bodies delivering 64% more strength than rayon tires!

UNITED STATES RUBBER COMPANY

1230 SIXTH AVENUE · **ROCKEFELLER CENTER · NEW YORK 20, N. Y.**

Listen to the New York Philharmonic Symphony broadcast over Columbia network every Sunday afternoon 3:00 to 4:30 P.M. EWT.

U. S. Royal Airplane Tires and Tubes Are Engineered for Today's Loads



U. S. ROYAL SMOOTH CONTOUR TAIL WHEEL TIRE—Like every U.S. Royal Airplane tire, the Tail Wheel Tire is available in Static Conductor Construction.

U. S. ROYAL SMOOTH CONTOUR BLOCK TREAD—The sharp edges of the U.S. Royal Block Tread protect against either forward or lateral skids.

U. S. ROYAL SMOOTH CONTOUR ICE GRIP A radically new "bottle cap" tread design for unexcelled traction on snow and ice.


The U.S. Royal line is complete with tires and tubes for landing wheels, nose wheels and tail wheels. Static Conductor Construction is available in all types.

If you have not used U.S. Royal Static Conductor tires on your planes, write us for complete information today. Your nearest "U.S." Field Airplane Tire Engineer, whose time is spent exclusively on airplane tire and tube developments, will gladly work with you on this or any other airplane tire problem.

UNITED STATES RUBBER COMPANY

1230 SIXTH AVENUE · ROCKEFELLER CENTER · NEW YORK 20, N. Y.

BOUNCE, BALLS, BOUNCE!

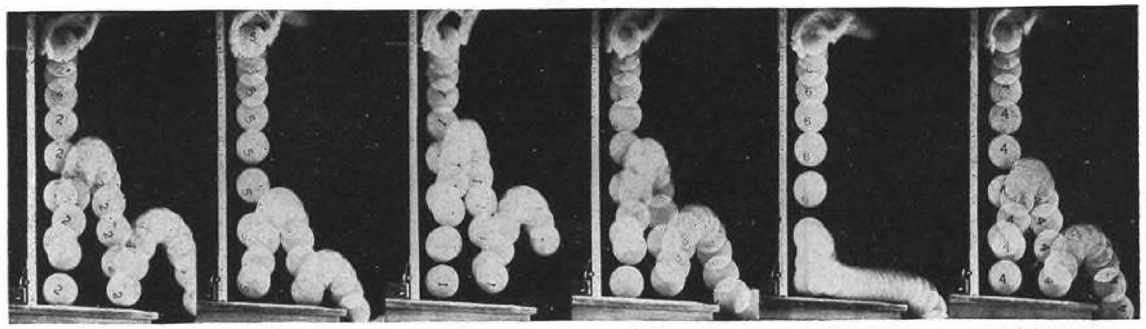

2 (Synthetic) 5 (Synthetic) 1 (Natural) 3 (Synthetic) 6 (Syntnetic) 4 (Synthetic)

SIX SOLID BALLS OF RUBBER caught in the act of bouncing by a high-speed camera that shoots at the speed of 1/6592 of a second. All of them were dropped from exactly the same height...and yet, what a difference there is! One of the balls is made of a compound containing natural rubber. Each of the other five balls contains one of the five major types of synthetic rubber.

Can you pick out which of the balls is made of the rubber used in making Army barrage balloons? Which rubber is being used today for making tires for military and essential civilian cars? Which one is used for bullet-sealing gasoline hose? Which for insulating tape? Which for making lacquer hose? Try your skill. You will find the answers to these questions in the box at the bottom of this page.

SYNTHETIC RUBBER IS NOT JUST ONE NEW KIND OF RUBBER

It is a whole family of new materials each with its own important uses

Bounce the balls as much as you please. One bounces high. One bounces low. One bounces in between. Which one is best? Actually, there is no one "best kind" of rubber for every purpose. Without all of these main types of synthetic and natural rubber, it would be impossible to beat our enemies and bring our victorious men home as swiftly as possible.

The rubber industry, the chemical and petroleum industries, the Government, working as a team, have made this achievement possible. By pooling all their experience with synthetic rubber, their resources, their skill, they have broken the threat of "rubber shortage" the Axis counted on to throw us out of the war. More than that, they have produced types of synthetic rubber that can do special jobs better than they have ever been done before...and for all time declared our independence from any future cut-off of the nation's rubber supply.

That is the true meaning of the synthetic rubber program. We are proud to have contributed our experience and our resources to doing this job...and doing it in record-breaking, history-making time.

What the future holds for synthetic rubber is not yet fully known. Yet this much is certain. When the war is won, the knowledge we are gaining every day through the use of all these synthetic rubbers, alone and with natural rubber, will make peacetime products...whether tires for your car, belts for your factory, waterproof footwear for your children, or gasoline hose for your service station...better and more serviceable than they have ever been before.

THEY MAY LOOK LIKE "SIX OF A KIND" BUT HERE ARE THE ANSWERS TO THE WAR JOBS EACH ONE CAN DO

1. This ball was made with natural rubber...today used in limited quantities in combination with synthetics because of our small reserve stock.

2. Used for tires, conveyor belts, fire hose and many other products. It is most like natural rubber and can be quickly and efficiently processed.

3. Used for making solvent and lacquer hose and other products where the utmost resistance to solvents is needed...better than natural rubber for these purposes.

4. Used for making bullet-sealing fuel hose for planes and for other uses where high resistance to aromatic fuels is essential.

5. Used for coating barrage balloons, tank linings, packings, acid hose, wires and cables. This type does not support combustion and is highly resistant to sunlight and chemicals.

6. Used for insulating tape, molded parts. It is soft, pliable and odorless.

Listen to United States Rubber Company program, featuring New York Philharmonic Symphony Orchestra, Carl Van Doren, and a guest star, broadcast over Columbia network every Sunday afternoon 3:00 to 4:30 P. M. Eastern War Time

1230 Sixth Avenue • Rockefeller Center • New York 20, N. Y.

THE NATION'S BIGGEST STOCK PILE OF RUBBER IS STILL THE RUBBER ON OUR CARS AND TRUCKS...CONSERVE YOUR TIRES!

In Canada: Dominion Rubber Company, Ltd.

UNITED STATES RUBBER COMPANY

A Partial List of Industries for Which Presstite has Successfully Developed Special Sealing Compounds:

For the Aircraft Industry:
- Sealers for—
  - Integral Fuel Tanks
  - Fuselage Seams
  - Drop-off, Expendable Fuel Tanks
  - Gun Turrets
  - Synthetic Glass
  - Instruments
  - Intercoolers
  - Air Ducts
  - Insulating Dissimilar Metals
  - Seaplane Floats

For the Refrigeration Industry:
- Sealers for Domestic and Commercial Refrigerators
- Bonding and Sealing Low Temperature Insulation in Refrigerated Rooms

For the Railroads:
- Sealers for Insulating, Soundproofing, and Weatherproofing of Railway Cars — Sealing Car Windows and Spot Welded Seams

For the Building Industry:
- Roof Coatings, Caulking, and Waterproofing Compounds

For the Shipbuilding Industry:
- Insulation Adhesive and Sealers — Rust Preventive Compounds


For the Automotive Industry:
- Special Adhesives and Sealers

For the Construction Industry:
- Sealers for Jointing Sewer Pipes
- Sealers for Waterproofing Excavation Work

Miscellaneous:
- For Glazing Greenhouse Windows
- Extruded Caulking Compounds
- Ammunition Paints
- Plus Many Special Products for the Army and Navy

Our Engineering, Technical, and Laboratory facilities are at the service of any industry with a sealing problem.

PRESSTITE SEALING COMPOUNDS

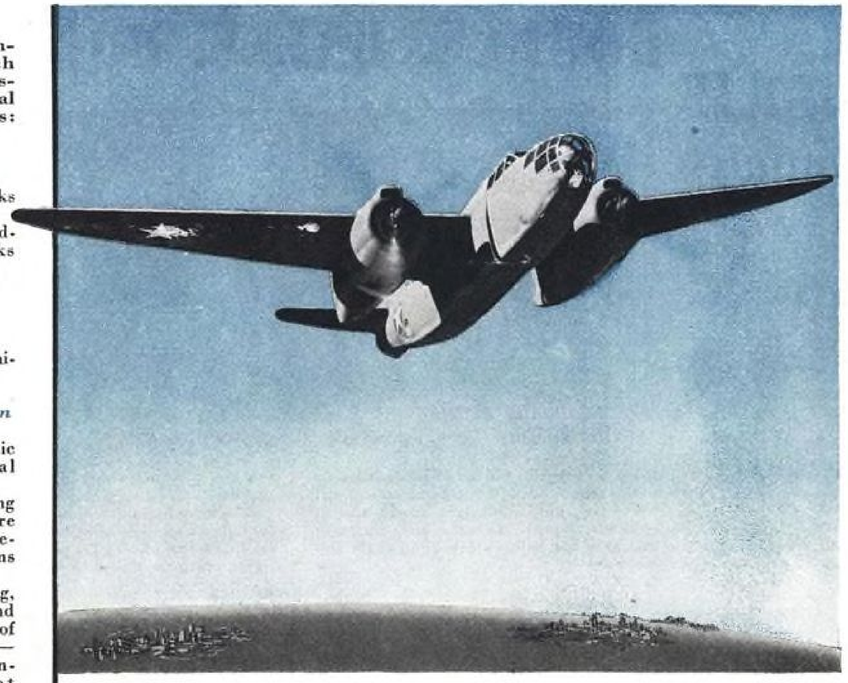

VISION UNLIMITED!

Presstite Sealing Compounds are playing an important part in America's production of military and naval aircraft. Yet it was the vision of our research and engineering staffs, aided by years of previous industrial experience, that enabled Presstite to meet the emergency demands of the aircraft industry in time of war.

From sealers used by the refrigeration and construction industries, by the railroads, and in many other fields, Presstite engineers developed special sealing compounds that today speed the assembly and contribute to the safety and efficiency of America's air armada.


Not only are Presstite sealers being used to seal aircraft fuel tanks, fuselage seams, gun turrets, seaplane floats, pressurized cabins, and other vital parts and devices, but we are producing many special compounds for the U. S. Ordnance Department, the Engineers Corps, and the U. S. Navy.


"*Ceiling Unlimited*" is the pilot's signal that the far horizons of the sky are visible in every direction. "*Vision Unlimited*" is symbolic of the continuing forward progress of Presstite engineering and research.

Today, and in tomorrow's post-war era, the vision unlimited of the Presstite organization stands ready to serve American industry wherever the most effective sealing compounds are required. We'll gladly work with you and your engineers, if you'll send us your detailed requirements.

PRESSTITE ENGINEERING COMPANY, 3910 Chouteau Avenue, St. Louis, Missouri

Underside of JU-88 main wing panel, with three inspection panels at *A*, *B* and *C* removed. One wing gas tank fits in section *A*, supported by four fittings *D* (shown in detail in sketch below). Gas tank ports fit in hole *E*, with fuel flowing through line *F* from tank to engine. Aileron torque tube *G* is located behind rear spar *H*. Bell crank system counter balance is at *I* and dive brake *J* (shown in extended position) is located ahead of front spar *K*. Main drag ribs of this section are at *L*, between which are "U" sections as shown at *M*. Aileron support arms are at *N*.

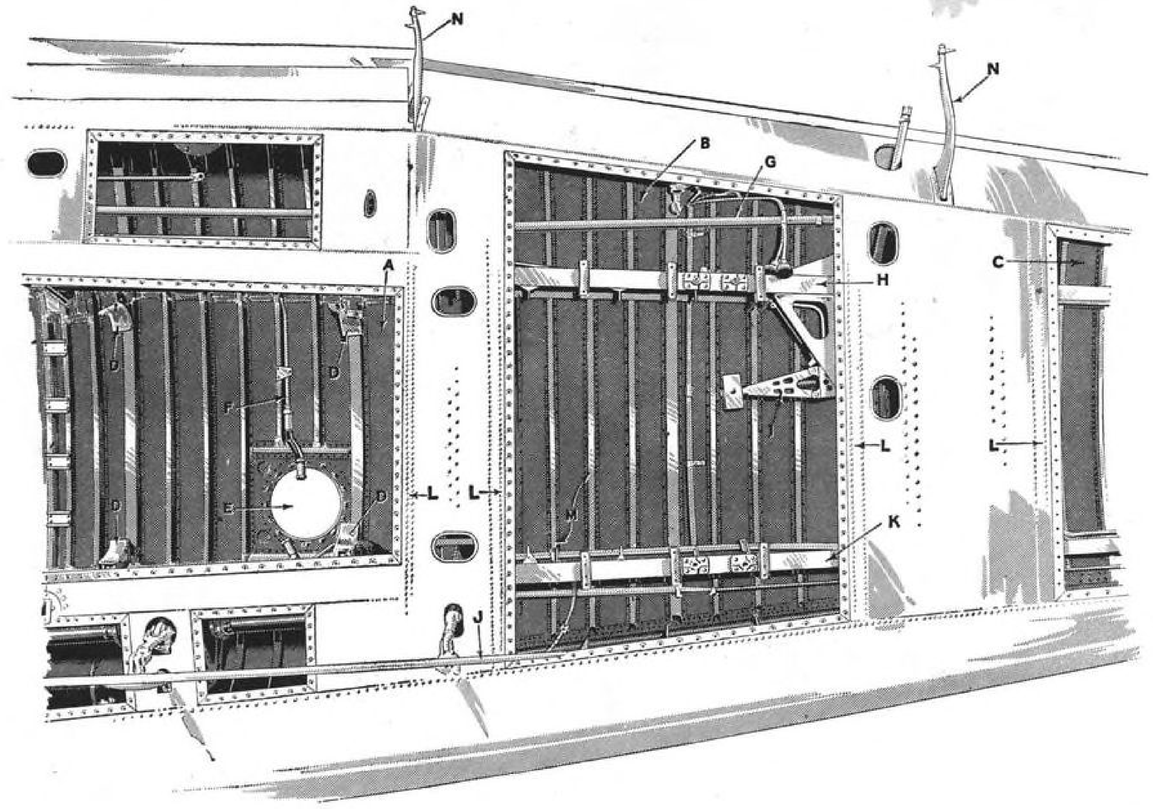

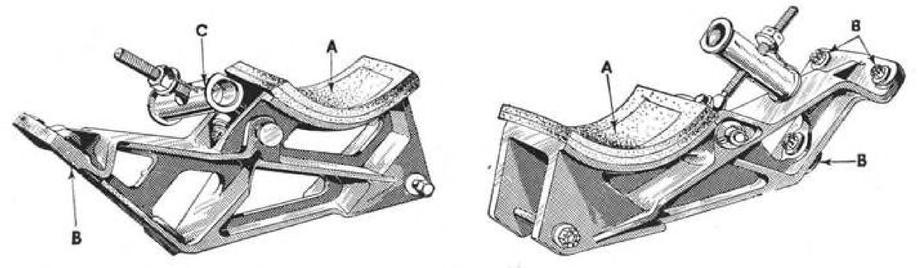

Details of JU-88 wing gas tank supports, shown at *D* in sketch at top. Direct contact between tank and support is avoided by synthetic rubber pieces *A*. Attachment to front and rear spar is by bolts at points *B*, and tank itself is held on bracket by strap attached to clamp *C*. Strap attaches to front and rear bracket, going over top of gas tank.

WHERE TIME COUNTS



North American P-51 Mustang

SPECIFY

AEROQUIP

HOSE LINES

WITH

DETACHABLE FITTINGS

Whether for aircraft or industry—liquid-carrying lines **INSTANTLY** replaced, with Aeroquip re-usable fittings and hose lines "tailored" on the spot.

SELF SEALING

COUPLINGS

Permit instant disconnection of liquid-carrying lines without loss of fluid or inclusion of air on reconnection.

High and low temperatures; pressures to 2000 lbs.


West Coast Office—
L. W. Pickens
1709 West Eighth St.,
Los Angeles, Calif.

Eastern Representative—
J. Henry Reisner,
Hagerstown, Md.


Canadian Representative—
Prenco Progress & Engineering Corp.,
7274 Stafford St.,
Toronto, Canada

AEROQUIP CORPORATION
JACKSON, MICHIGAN, U. S. A.

Underside view of part of JU-88 wing panel with leading edge down, shows front wing gas tank brackets at *A*. Tank fits so that filler port goes into hole *B*. Dive flap *C*, shown in extended position, hinges at points *D*. Flap movement is accomplished through torque tubes *E* operated by hydraulic cylinders located within wing at *F*.

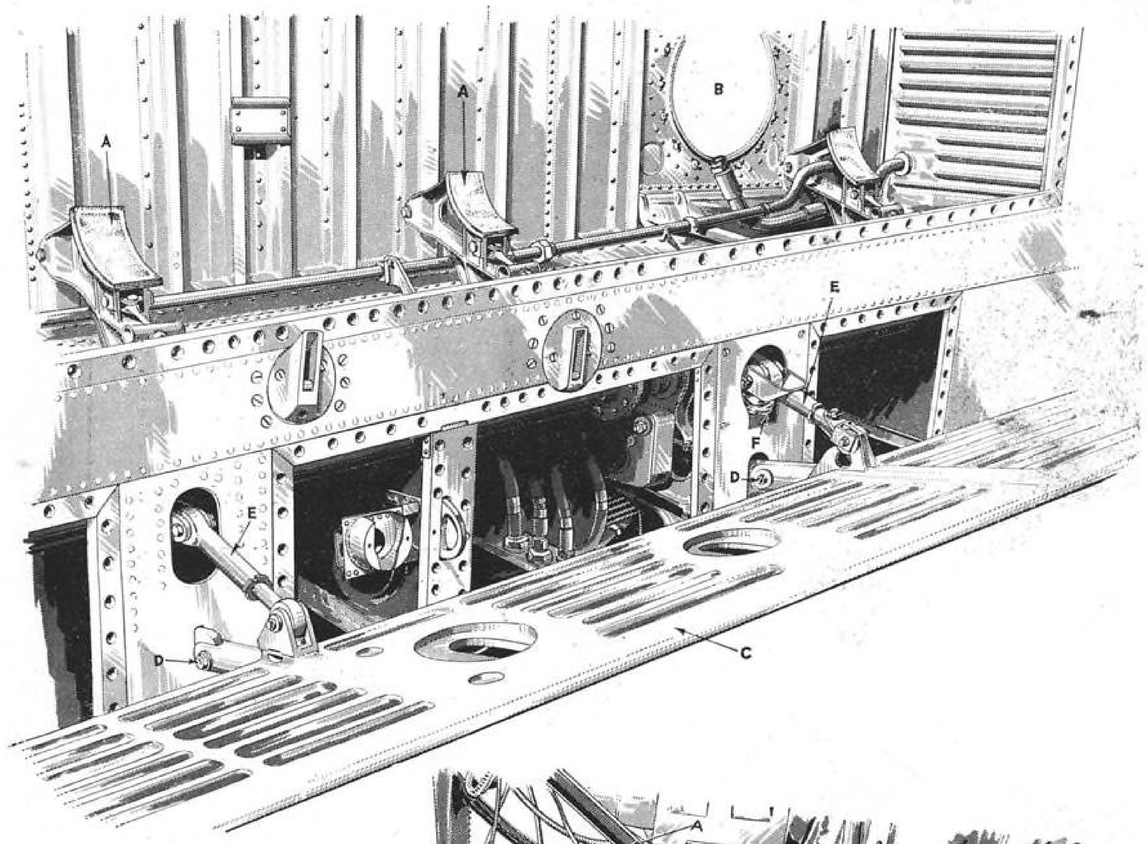

Stainless steel muffler, standard equipment on Piper *Coupe*, is fitted to engine between tubular structure of engine mount *A* and firewall *B*. Stove *C* around muffler supplies warm air to cabin.

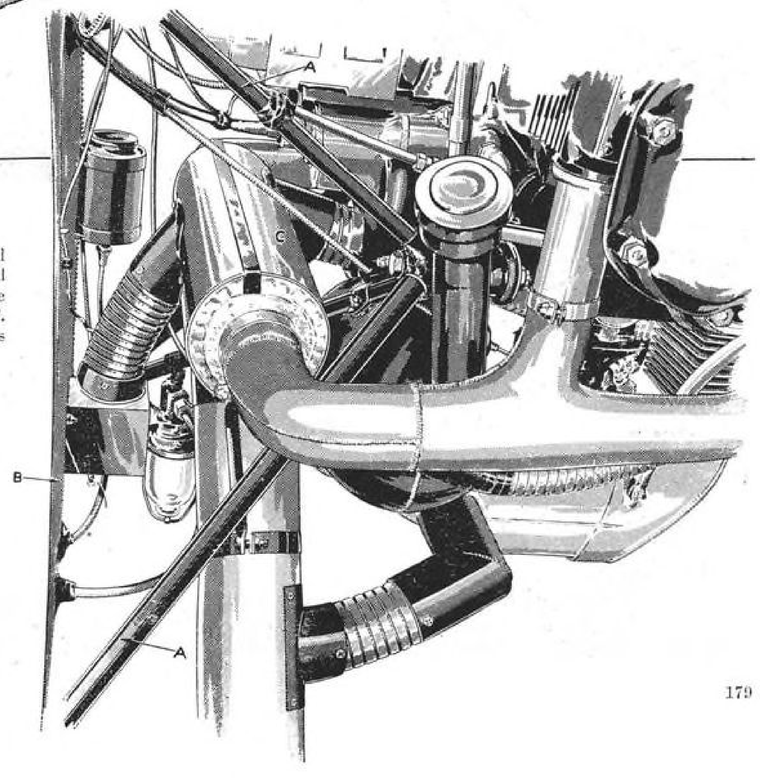

NORTON *Cut-off Wheels* IN AIRPLANE PRODUCTION




In each great bomber pioneering the skies to Victory, hundreds of feet of tubing are used.


Cutting off tubing is an important and sizeable operation in every aircraft plant. Norton Cut-off Wheels are available in a variety of abrasives and bonding processes. Norton abrasive engineers will help you to select your wheel for "wet" or "dry" cutting for the kind of tubing to be cut and for the type of machine on which it is to be used.


Write for booklet No. 517A giving wheel specifications for different kinds of tubing.



Exploded views of Fairchild AT-21 *Gunner,* four to six place crew trainer, now in volume production for AAF. Powered by two V-12, air-cooled Ranger engines developing 520 hp. each at takeoff, *Gunner* has top speed of 235 mph. and cruising speed of 198 at 5,000 ft. Fuselage is full monocoque aft of center section, with forward portion supported internally by welded steel tube truss. Wings are two-spar wood construction with wood ribs. Fuselage and wing covering are of plastic bonded veneers, molded to shape by Fairchild-developed Duramold process. Lower sketch shows exploded view of production subassemblies of Duramold.

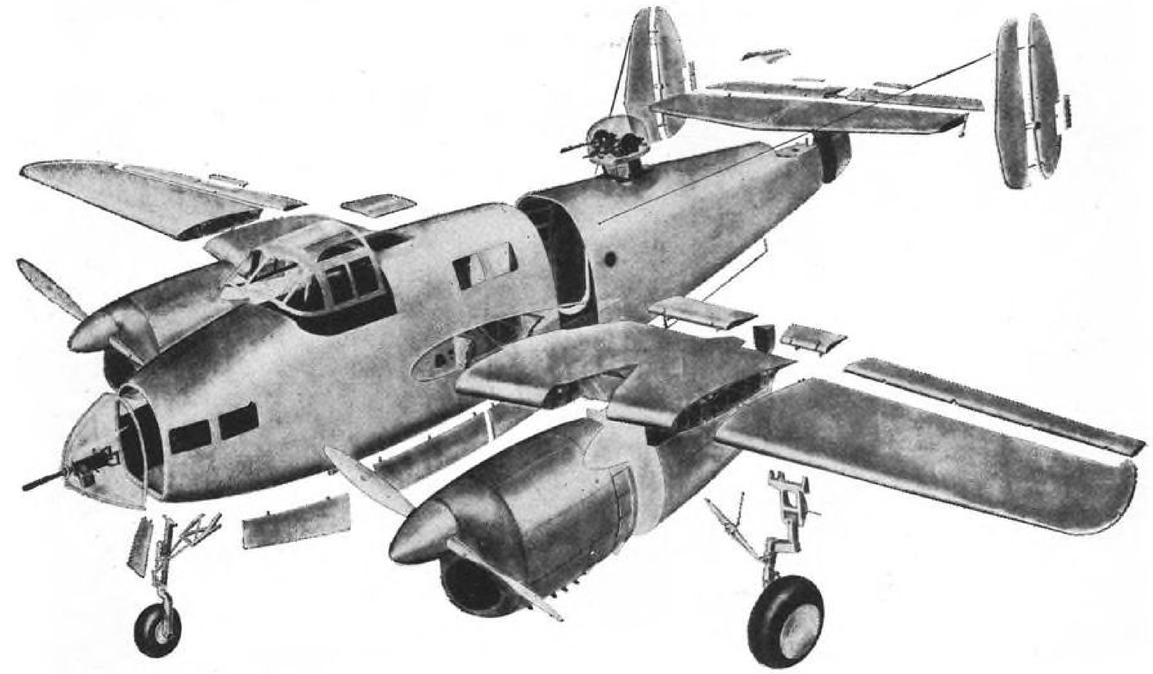

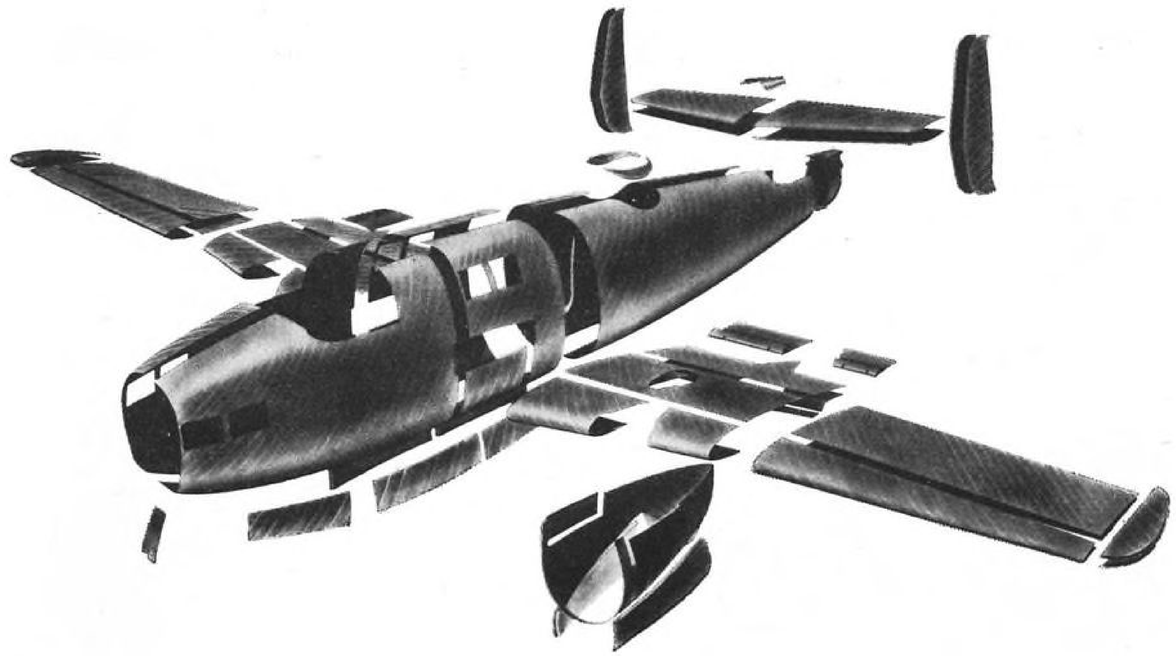

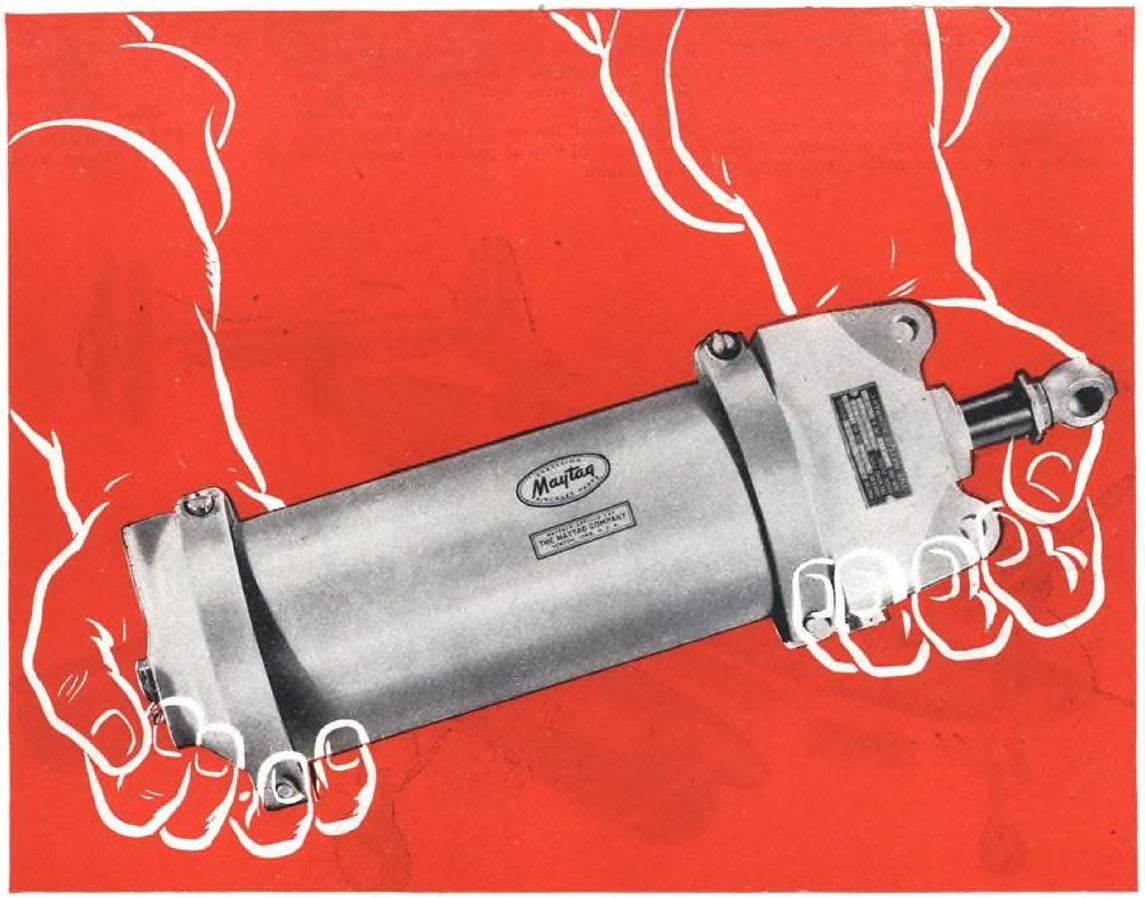

Maytag Hydraulic Cylinders Feature Rugged Simplicity


THE CYLINDER illustrated is being used today on a famous American bomber.
Its rugged simplicity is typical of Maytag hydraulics . . . a simplicity resulting in lighter weight . . . fewer parts . . . and greater dependability. Maytag hydraulic cylinders are different. They incorporate distinctly unique principles of construction

Maytag is proud of the significant contributions of its engineers in the field of hydraulics.

Maytag also produces Eclipse electric retracting units . . . aluminum alloy aircraft castings.

THE MAYTAG COMPANY, NEWTON, IOWA

Maytag
WASHERS IRONERS



Mechanical Properties Of Plexiglas

SCRATCH RESISTANCE of Plexiglas is measured by several methods.

1. *Moh's Scale,* which uses the resistance of various minerals to scratching as a basis for comparison. Talc—with the least resistance—is No. 1, followed by other materials with gradually increasing hardness up to the diamond, which is No. 10. The Moh's number for Plexiglas is from 2 to 3, being equal to rocksalt or calcite.

2. *Bierbaum Number* is obtained by measuring the width of a scratch made on surface of material by a diamond cut to shape of a cube and mounted so that diagonal of cube is perpendicular to surface to be tested, while edge of cube is in line with scratch. The Bierbaum number is obtained by dividing load on diamond in kg. by width of scratch in mm. Bierbaum number for Plexiglas is 15 to 18.

3. *Pencil hardness* is used to indicate scratch resistance. Plexiglas resists scratching by pencils of less hardness than 8H. and by alloy pencils softer than 30 percent antimony—70 percent lead.

Brinell Number is from 18 to 20, using 500 kg. load and 10 mm. ball.

Rockwell Number is M70, using 100 kg. load and ¼ in. ball. Both of above hardness tests made at 77 deg. F on ⅛ in. stock.

Rebound is measured by means of Shore Scleroscope, which tests material by dropping a diamond pointed weight or steel ball on a rigidly supported specimen. Height of first rebound gives rebound rating. Using diamond point, Plexiglas rating is *80/140,* while with a ¼ in steel ball reading is *75 percent.* Both of these tests were made on a sample ¼ in. thick at 77 deg. F. This test is of value in comparing resistance of plastics to repeated light impacts.

Abrasion Resistance is measured by the Rohm & Haas test, which was developed by the manufacturers in the absence of any effective recognized test for this quality Test is made by pouring a free-falling stream of carborundum powder on surface, then measuring light diffusion on a haze meter. Plexiglas shows an increase of 40 percent on light diffusion after 200 gr. of No. 40 carborundum powder have been allowed to flow onto surface from a height of 2 in. at an angle of 45 deg. to the material.

Impact Strength is measured at 77 deg. F. and is from *3 to 4 ft.-lb.* for a standard ½ × ½ bar. In this test a pendulum of given weight and radius is allowed to drop through a given arc to break the sample being tested. Arc through which pendulum travels after breaking sample gives residual energy which is subtracted from energy of pendulum to give force required to break material. Impact strength of Plexiglas is affected very little by changes in temperature. Thickness affects impact strength approximately as square of thickness, area being unchanged. Large areas naturally are able to withstand higher impacts than smaller ones, due to greater resilience of surfaces. Shape is an important factor in strength of Plexiglas objects, as may be seen from following results: Using ¼ in. thick material, impact strength of a 13½ in. dia. flat disk was 9 lb.; that of a 12 in. × 12 in. flat square was 10 lb.; a 13½ in. dia. 24 in. radius spherical section was 8 lb. and a 12 in. × 12 in. cylinder, 24 in. radius was 14 lb.


It is obvious that impact energies have to be absorbed at entirely different rates, even though load may be same in ft.-lb. Table I gives results of tests made with bullets of various calibers, standard falling ball tests, and bag-of-shot test which is used in laminated glass industry. In latter test, a bag of shot, weighing 11 lb. is dropped from increasingly greater heights until sample is cracked.

Table I

Thickness Inches	Bullet Impact	Falling Ball	Bag of Shot
060	.....	1.5 ft.-lb.	33 ft.-lb.
.125	13 ft.-lb.	3.7 ft.-lb.	78 ft.-lb.
250	24 ft -lb.	9.5 ft -lb	217 ft.-lb
375	. . . .	23 ft -lb.	.....
500	55 ft.-lb.	-	.. ..
1 000	168 ft.-lb.	. ....	. ... ..

Strength of Plexiglas samples is greatly affected by condition of surface, particularly that portion in tension. Data in accompanying Table II were obtained by means of Charpy tests using a falling pendulum on bars cut from

Exclusively LELAND

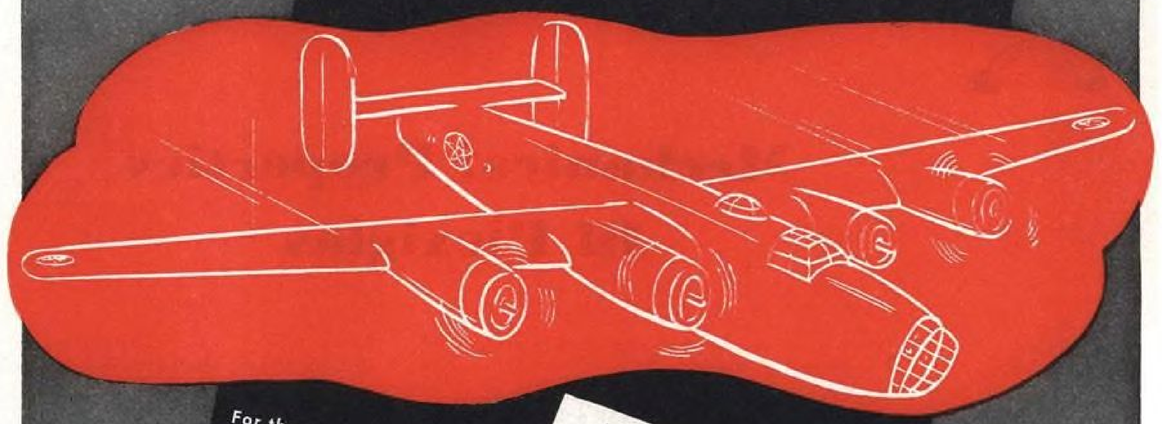


For the air services Leland developed, and are the sole builders of, the adjustable speed AC-DC motor on the accompanying truck. It is used to power aeroplane instrument testing equipment—driving a hydraulic pump to produce pressure—can be found at all air bases where power is available.





Also developed for the air services by Leland and being built exclusively by Leland, is the accompanying aircraft power inverter. This unit finds its application on planes where it furnishes high frequency alternating current to power automatic pilots, radio compasses and other electronic devices in aviation.

The third Leland unit here shown is an aircraft type DC motor used to operate landing gears.



Leland engineering and Leland plant facilities are geared for war production and you, perhaps, may find at Leland the solution of some design or supply problem now troubling you.

Leland

WAR DUTY MOTORS

THE LELAND ELECTRIC COMPANY, • DAYTON, OHIO

Mechanical Properties Of Plexiglas

stock .500 in. thick. The finish of samples was as indicated in left hand column.

Table II

Condition of Tension Surface	Charpy Impact Strength, Ft.-Lb.	Maximum Flexural Strength, Psi.
A. Polished to remove scratches	3.2	13,750
B. Sawed	2.9	13,600
C. Passed through planer so that scratches are parallel to long dimensions	3.4	13,400
D. Passed through planer so that scratches are perpendicular to long dimensions	3.1	13,300
E. Sanded on belt sander so that scratches are all parallel to long dimension	3.5	13,500
F Sanded on belt sander so that scratches are all at 45 deg. angle to long dimension	3.0	12,800
G. Sanded on belt sander so that scratches are perpendicular to long dimension	1.6	9,530
H. Tension side sanded so that scratches are parallel to long dimensions, compression side sanded so that scratches are perpendicular to long dimension	3.2	13,000
I Tension side sanded perpendicular, compression side sanded parallel to long dimension	1.6	9,300
J. Sanded on belt sander so that scratches were perpendicular to long dimension, then resanded so that scratches are parallel to long dimension	3.3	13,100
K. Sanded on belt sander so that scratches are perpendicular to long dimension, then coated with one heavy coat ethylene dichloride-Plexiglas solution	2.2	13,000
L Same as K except two medium coats ethylene dichloride-Plexiglas	2.9	13,000

Tensile Strength is determined from a sample ½ in. wide, filed and sanded to a smooth but not polished surface. Dots are inked on surface 2 in. apart to measure elongation of sample. At room temperature, elongation varies with stress until a point between 6,000 and 7,000 psi. is reached, after which it rises until reaching 7,500 psi. point, when elongation is about 4 percent. Beyond this, resistance to stretching drops off until it may be as low as 5,500 psi. at breaking point, though in some cases it has been as high as 7,000.

Temperature affects tensile strength inversely as the amount of heat applied. Starting with a T.S. of about 9,500 psi. at 14 deg. F., strength decreases in approximately a straight line until it reaches 3,500 psi. at 104 deg. F., elongation in latter case being nearly 150 percent. Rate of straining in this test is .050 in. per min.

Age and Conditioning do not affect T.S. of Plexiglas to any appreciable extent, except that complete dehydration causes strength to rise about 10 percent. Seemingly the greater elongation of moist specimens is due to a lubricating effect in material.

Rate of Straining may cause as much as 1,700 psi. in max. T.S. with a corresponding effect on elongation. Tests made at from .050 in. per min. to .400 in. per min. show a decided increase in T.S. at higher figure.


Pre-stretching sets up a grain in Plexiglas causing polymer chains formed in manufacture to fall into parallel lines. Test pieces 1½ in. × 12 in. were stretched to 10, 25, 50, 75 and 100 percent of their original length and specimens cut from them with their long axes in direction of stretch. Plates 8 in. × 10 in. were also stretched to 10 and 25 percent of their original length and test pieces cut perpendicular to direction of stretch. Mechanical difficulties prevented further stretching of sheets. Results are shown in accompanying Table III.

Table III

Stretching, Percent		Average Maximum Tensile Strength, Psi.	Average Elongation at Failures Percent	Average Stress at Failures Psi.
None		7,530	20	5,730
Longitudinal	10	7,620	20	6,080
	25	7,780	35	6,130
	50	7,750	60	6,600
	75	8,000	60	7,710
	100	8,080	60	8,060
Transverse	10	8,120	1.3	8,050
	25	7,970	1.2	7,970

Above data supplied by Rohm & Haas Co.

Sphygmomanometer

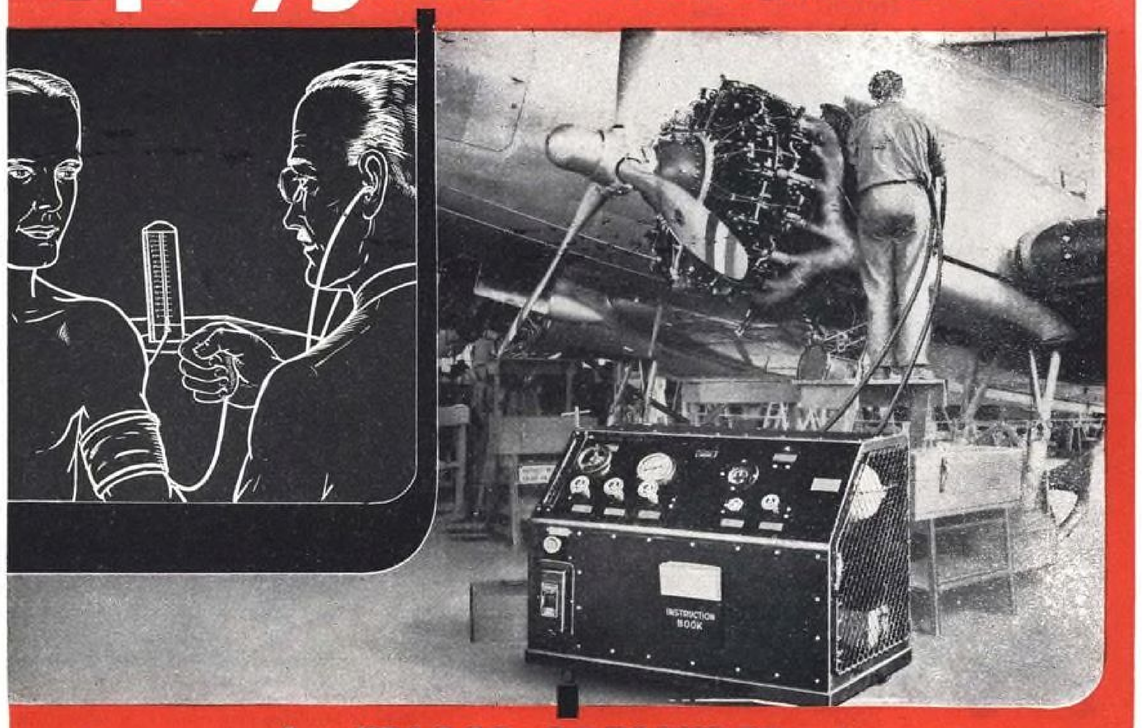

it tests the "BLOOD PRESSURE" of airplanes

Your doctor uses a sphygmomanometer when he checks your blood pressure . . .

Similarly, the test stand in the photo above is what the ground crew uses to check a plane's hydraulic system—the system that furnishes power for swift, foolproof control of ailerons, elevators, rudders, bomb-bay doors, landing gear, propeller-feathering mechanism, wing flaps and brakes.

A pump at the plane's motor is the "heart" of this hydraulic system. To make a test, connections from pump to system are switched to the HydrOILic test stand, the circuit is completed by starting the tester, and the plane's hydraulic system is quickly checked at test pressures.

In addition to hydraulic circuit testers, Denison builds many other test stands for checking the *flight* performance of aircraft *on the ground!* There's a HydrOILic unit that checks aircraft spark plugs. Another tests magnetos. A third tests the feathering action of propellers—and there are still others.

* * *

You'll also find HydrOILic equipment used in the production and assembly of airplane parts . . . and used in the airplanes themselves. HydrOILic valves, cylinders, motors and pumps are built into many types and makes of production machinery in all industry.

Denison HydrOILic engineers have proved their unusual ability to get better answers to all sorts of production, testing, and movement-control problems. This, added to the exceptional *accuracy* and *flexibility* of fluid (oil hydraulic) power transmission, is the reason for the wide use of HydrOILic equipment. Denison may already have the answer to your own problems, or perhaps know a short cut to the best solution. Your inquiry will bring the desired information. Please write. The DENISON Engineering Company, 1166 Dublin Road, Columbus 16, Ohio.

HydrOILics FOR POWER, SPEED and CONTROL


Industry's Right Hand

DENISON EQUIPMENT in APPLIED HydrOILics

WILCOX EQUIPMENT

used by major Airlines throughout the United States

Proof of quality and dependability is in performance. Wilcox radio equipment is installed on major Commercial airlines throughout America, and in addition it is being used throughout the entire world in connection with military operations. For airline radio communications, depend on Wilcox!

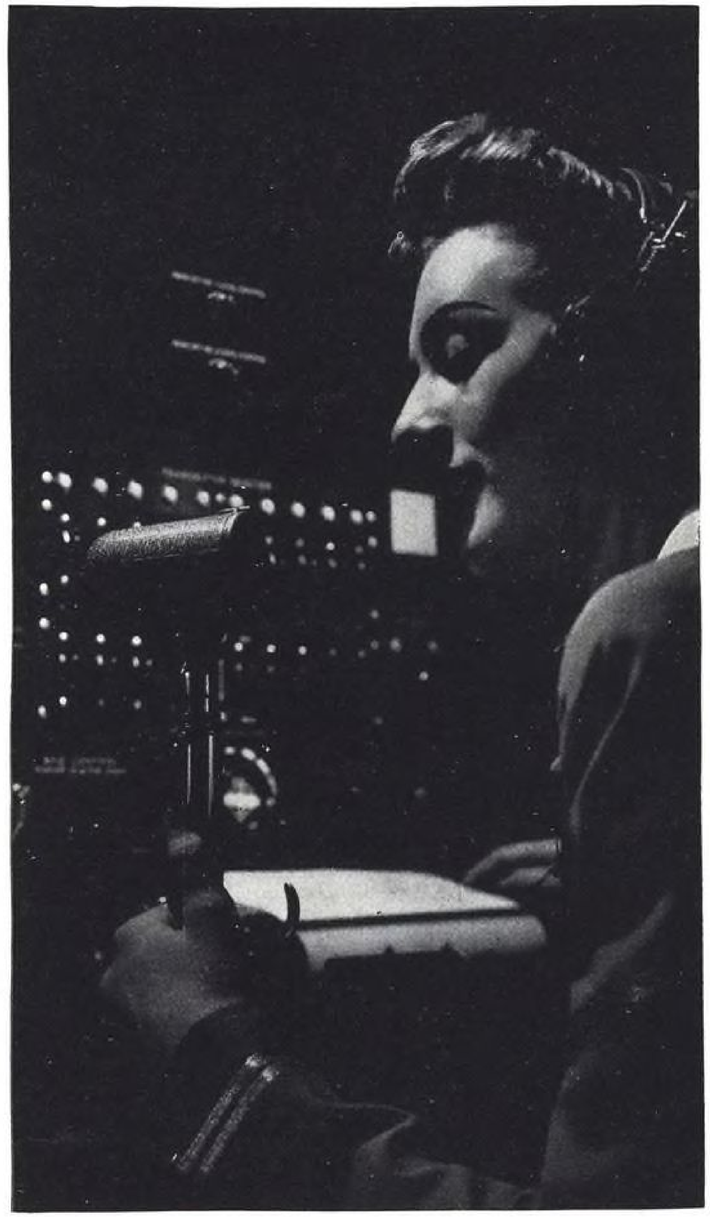

WILCOX ELECTRIC COMPANY

Quality Manufacturing of Radio Equipment

14th & Chestnut ☆ Kansas City, Mo.

RUGGED ACCURATE BED . .
Another Finer Feature of Logan Lathes



The accuracy you need for precision work is yours in a Logan Lathe, even after long continuous use. For Logan combines solid strength and Nth degree accuracy in every Logan Lathe bed. Extra heavy ribbed and warp-free, the Logan bed is machined from the finest special analysis castings obtainable. Its V ways and flat ways are precision ground to an accuracy of within .001 of an inch from end to end. This fine construction, usually found only in the highest priced lathes, is another reason why alert production men are depending more and more on Logan Lathes for low cost production of small parts.


Write today for catalog sheets giving complete specifications on all models of Logan Lathes . . . Quick Change Gear Types . . . Manufacturing Turret Lathes . . . Hand Screw Machines . . . Floor Model Back Geared Screw Cutting Lathes . . . Bench Model Back Geared Screw Cutting Lathes.

LOGAN ENGINEERING COMPANY
Chicago, Illinois

BRIEF SPECIFICATIONS

Swing over bed, 10½" . . . bed length, 43⅛" . . . spindle hole, $^{25}/_{32}$" . . . capacity, ⅝" with push type collet . . . 6-position automatic indexing turret . . . stroke of turret, 4¼" . . . 12 spindle speeds from 30 to 1450 r.p.m. . . . all moving parts protected by ball bearings or self lubricating bronze bearings.

Logan . . . A NAME TO REMEMBER WHEN YOU THINK OF LATHES

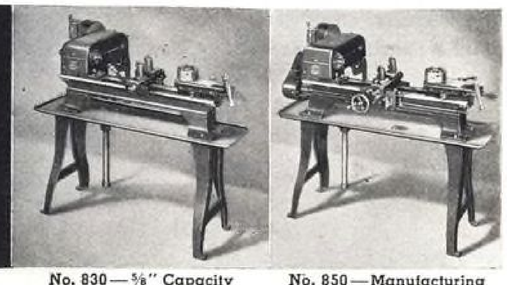

No. 830—⅝" Capacity Hand Screw Machine

No. 850—Manufacturing Turret Lathe

Review of Patents

By A. HARRY CROWELL,
Registered Patent Lawyer

FOLLOWING are digests of some of the more significant recent patents on aviation developments granted by the U. S. Patent Office. Mr. Crowell will be glad to furnish readers information, without charge or obligation, on approximate cost and procedure in applying for patents and trademark registrations. Address inquiries to him, care AVIATION, 330 W. 42nd St., New York 18. Printed copies of any of the patents listed below are obtainable at 10c. each directly from U. S. Patent Office, Washington.

Landing Gear Device. Improvement indicated here is linkage arrangement which in the retraction and extension of the undercarriage acts to keep a uniform loading on the gear's actuator. This is stated to be accomplished by designing linkage so that angles between links are kept between two extremes instead of reaching a stall or dead point.—2,323,385, filed Oct. 2, 1940, patented July 6, 1943, E. A. Eddy, assigned to Brewster Aeronautical Corp.

Rotative Wing Aircraft. This is direct takeoff autogiro in which rotor blade is driven during takeoff but is auto-rotated after takeoff. An interlocked control system is designed to release wheel brakes, disconnect rotor drive, and set pitch of rotor blades to "lift" all simultaneously. System is of electro-hydraulic type.—2,324,588, filed Oct. 31, '41, patented July 20, '43, A. E. Larson, assigned to Autogiro Co. of America.

Auto-Control System. Patent is for improved control of aircraft using automatic pilot system, specifically to overcome tendency of over-controlling. Gyroscopes have been added to damp over-control action and make for more precision in controlled movements of plane.—2,325,108, filed Apr. 16, '42, patented July 27, '43, B. G. Carlson, assigned to Jack & Heintz, Inc.

Rudder and Flap Control device is for control system where rudder has flap to assist movement. Normally locked in alignment with rudder, flap will not flutter at low speeds. System is designed to move flap with first movement of rudder control before rudder itself moves while at same time preventing movement of flap by slipstream.—2,325,548, filed Dec. 7, '40, patented July 27, '43, H. Roos et al, vested in Alien Property Custodian.

New Glider Launching Mechanism comprises power unit shaped like a bomb and using jet propulsion. Unit is slung between undercarriage wheels in same manner as a bomb. When glider is airborne, unit detaches, ready for use on other gliders.—2,325,630, filed Sept. 1, '42, patented Aug. 3, '43, J. N. Petty.


Rotary Wing Craft Design calls for rotor with variable pitch blades wherein blades are controlled automatically by stresses acting thereupon. When rotor speed increases, pitch increases; conversely when rotor speed decreases pitch decreases.—2,325,632, filed Jan. 30, '40, patented Aug. 3, '43, C. G. Pullin, assigned to Autogiro Co. of America.

Airplane Fabric Assembly. Patent relates to wing framework construction, particularly to system for retaining fabric on wing. Frame is of tubular members with outer portion of each exterior tube slotted to receive wing fabric. Rod inserted in loop of fabric within tube clamps fabric in slot.—2,325,900, filed Jan. 2, '42, patented Aug. 3, '43, J. K. Anderson.

Endless-Track Undercarriage is designed to replace normal wheel and tire arrangement to increase effective load supporting area without materially augmenting bulk of landing element. It is constructed for both retraction and steering.—2,326,019, filed Oct. 12, '39, patented Aug. 3, '43, G. H. Dowty.

Modifications of preceding device concern retraction arrangements in which endless track member retracts (1) upright or (2) sidewise, in both cases so that undersurface comes in flush with lower wing surface.—2,326,020, filed Nov. 25, '39, patented Aug. 3, '43, G. H. Dowty.

Multi-Drive Plane. Here, patent is for craft with multiple propellers which are belt driven from a single power plant. Further provided is longitudinal adjustment of engine to assist in trimming plane during flight.—2,326,104, filed Mar. 26, '41, patented Aug. 3, '43, J. Petrich.

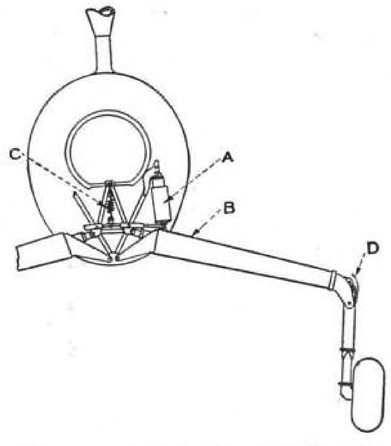

Monocoque-strut landing gear for autogiros, covered in patent awarded to A. C. Falk and R. A. Wagner, provides high vertical travel by means of oleo shock absorber *A*, push-pull rod *B* containing thrust bearing, adjustable tension spring *C*, and knee-like joint *D*. Filed Mar. 14, '41, patented Aug. 10, '43, and designated No. 2,326,210, this device is assigned to Kellet Aircraft Corp.

Multiple Chuting of Equipment. Container arrangement is designed to allow simultaneous launching of equipment parachutes, followed by their separation in the air so there is no tangling. Packs are connected by means of straps running from bottom of one pack to rip cord of parachute of one below, with rip cord of initial pack hooked to static line of plane. Static line opens chute of first pack, which in falling opens chute of second pack, action then continuing through remaining packs.—2,326,813, filed Apr. 18, '42, patented Aug. 17, '43, H. Wilson.

Flying-Wing Plane Design has contra-rotating propellers of pusher type at rear of short fuselage. Rudder and normal tail surfaces are located on short booms extending rearward from tips of wings.—2,326,819, filed Aug. 28, '40, patented Aug. 17, '43, D. R. Berlin, assigned to Curtiss-Wright Corp.

De-Icer Apparatus comprises elastic boot which can be inflated with 10 lb. pressure for common ice removal or higher pressures for glaze ice. Boot has multiple passages for low-pressure inflation, larger passage for higher pressure.—2,327,034, filed Sept. 30, '41, patented Aug. 17, '43, W. G. Geer.

Auto-Pilot Device is designed as improvement on automatic control of earlier patent (No. 2,325,108, July 27, '43). Chief difference is arrangement of oil-operated gyro which permits gyro's movement to control flow of its propelling oil.—2,327,171, filed Apr. 13, '42, patented Aug. 17, '43, B. G. Carlson, assigned to Jack & Heintz, Inc.

Variable Form Parachute Pack is constructed with elastic fabric so pack will conform to wearer's shape. Fabric's degree of elasticity is controlled to restrain deformation of pack.—2,327,358, filed Sept. 5, '41, patented Aug. 24, '43, F. G. Manson, et al.

Crash Indicator is device upon which pilot can specify difficulties occurring in his plane when it is about to crash. Device would be expelled from plane and drop by chute to indicate conditions leading to crash.—2,328,208, filed May 6, '41, patented Aug. 31, '43, E. G. Friedman.

Aerostation Safety Valve. This is valve to control gas cells of lighter-than-air craft. It is designed to regulate pressures in gas bag by valving off gas whenever pressures within bag reach predetermined maximum.—2,329,002, filed Apr. 26, '41, patented Sept. 7, '43, E. Schoettel.

(*Turn to page* 293)

Where Are Those Dividends?

By H. L. FEDERMAN

Paucity of cash-per-share returns may puzzle the questioning layman, but a check of the aircraft industry's financial history quickly shows there's no mystery about it.

DESPITE established success in earnings, the aviation industry has done very poorly in rewarding its stockholders with cash dividends. This is demonstrated by the record of both the aircraft manufacturing group and the air transport operators.

While this condition may be disappointing, it is characteristic of all new and growing enterprises. For example, an examination of the dividend record of the radio industry shows no disposition to make liberal disbursements. Radio has been in the ascendancy for more than a decade, yet has made meager dividend payments despite its outstanding success. New developments required constant refinement and provision for mounting contingencies, and the economic uncertainties of the times have introduced a cautionary note in all forms of industrial life so that even the highly successful corporations of stable and mature record have had a tendency to go easy on dividend payments.

It is ironic, however, that the aircraft industry, with its risky beginnings, and the hope of liberal dividend payments if successful, is unable to fulfill this expectation largely due to conditions beyond its control.

The threads of aircraft industry financial history show a definite pattern always weaving its way—a pattern tending to slow up dividends. It is not so long since aircraft builders were pioneering and had all they could do to survive, let alone return a profit on the investment. No sooner had this uncertain period been hurdled when the need for more capital became apparent. This meant small dividend payments—if any. Subsequently, despite mounting earnings, much uncertainty disturbed the industry, "contingency" reserves became the order of the day, and dividends remained secondary. Then taxes and contract renegotiations bewildered managements and made liberal dividend payments unwise, and currently the industry is concerned about the postwar period, hence is interested in establishing reserves for reconversion and future developments. Certainly, dividend disbursements can hardly be encouraged by this sequence of events.

Typical comments of the times substantiate this pattern. The Aviation Corp. experienced one of the sharpest earnings gain in its history for the six months ended May 31, 1942. However, the company deferred action on dividend payments until a "reasonable forecast of earnings could be made." The reasons cited were: Uncertainties of selling prices of products, proposals for price ceilings on materials supplied by prime and subcontractors, and efforts toward wage stabilization in the industry.

Recently, Lockheed attributed its inability to establish a definite dividend policy to "working capital requirements and renegotiation of contracts." It isn't too difficult to find similar official expressions by other aircraft companies evidencing a strong inclination to husband resources in one form or another.

The most effective portrayal of dividend payments for the aircraft industry is the record itself. Table I discloses this earnings and dividend history for the last three years, as reported by the major companies. (Estimated earnings for 1943 are not available, thus the period 1940-1942 inclusive is used). It was during this period that the group enjoyed its most successful results. Included in the dividend payments shown are those paid or declared during 1943. While this may distort comparative results somewhat, it is fair to do so, since dividend policies frequently are established with a backward glance at the previous year's results. A lag of one year is nevertheless present and must be recognized.

It can be seen that the best dividend record among the group is enjoyed by United Aircraft. In this case, for a proper perspective, it may be well to go back to 1936 when the company made its first dividend disbursement, 50c. per common share. Since that time, the company has steadily increased the amount of its annual dividends until it hit a peak of $4 per share during 1941. For 1942, $3 was paid and thus far this year, $1.50.

It is believed likely that the company will pay another $1.50 before the year is over. With this assumption, and assuming further that the company will earn at least the same amount in 1943 as it did last year, aggregate earnings for the eight years ending with 1943 will total $31.94 per share of which $16.75 will have been paid to stockholders. This is not a bad record and can be particularly gratifying to any stockholder who bought shares at $10 back in 1935—and retained such holdings throughout the years. By the same token, any stockholder who paid more than $50 per share during 1940 would be very unhappy.

United Aircraft also has the distinction of having a preferred stock outstanding which has attained a high investment rating despite being identified with a highly speculative industry. Issued in Jan. 1942 slightly below par ($100 per share) this preferred stock subsequently sold in the low 90's but recovered rapidly to hit 114½ this year. Currently, this issue is selling around $106 per share. Carrying a 5 percent dividend rate, it is considered an attractive income producer. Earnings coverage was $65.74 per share for 1942 and will likely be larger this year. As it is convertible into the common stock at the rate of one common for each $40 of preferred, a hedge in the rise of the junior equity is also present.

In this connection, there are a number of other senior aircraft equities

(*Turn to page* 252)

TABLE I—EARNINGS AND DIVIDEND PAYMENTS OF MAJOR AIRCRAFT COMPANIES DURING LAST THREE YEARS.

(Source: Standard & Poor's Aircraft Industry Survey)

	Earnings Per Share*	Dividends Paid Per Share†
Aviation Corp.	$1.26	$ .50
Beech	7.39	1.00
Boeing	10.84	2.00
Bell	18.47	5.00
Consolidate - Vultee (common)	19.47	1.00
Curtiss - Wright (common)	6.41	2.50
Douglas	56.76	20.00
Grumman	9.33	4.25
Lockheed	18.01	6.50
Martin	16.20	8.00
North American	6.87	4.25
Republic	2.55	0.25
United Aircraft	18.09	12.00

* Covers 1940–42 inclusive and includes postwar tax refund.
† Covers 1940–42 inclusive and includes 1943 dividends paid or declared up to Oct. 7.

TABLE II—BARRON'S STOCK AVERAGES

	Aircrafts	Air Transports	50 Stocks
Oct. 7, 1943	28.40	34.38	78
Sept. 30, 1943	29.28	37.53	80
Sept. 23, 1943	29.01	38.11	81
Sept. 16, 1943	28.40	39.75	80
Oct. 2, 1942	31.92	23.03	62





RUSSIA


NORTH AFRICA


THE SOLOMONS



ALASKA


PANAMA


ENGLAND


AUSTRALIA


THE CARIBBEAN


ICELAND


NEW GUINEA


THE SOUTH PACIFIC


HAWAII

See why we build 'em fast?

At all these major bases and active fronts, U. S. Army Bell Airacobras are in the air day after day and week after week

More are being readied for action in secret sectors that will explode into fighting fronts as our offensive plunges ahead.

A good fighter plane is basic in modern strategy. The Airacobra is a tough, fast, versatile, single engine ship armed with heavy machine guns and a cannon. No battlefront ever has too many good fighter planes like the Airacobra.

See why we put design engineering on a production schedule, developed short cuts in fabrication and built moving conveyor assembly lines?

See why we must build 'em fast?

MASS PRODUCTION TECHNIQUES, developed to meet the demands of war, will be ready and waiting to build the planes of peace. That's one reason why your postwar aircraft will be far better, far lower priced than the types you knew before the war. © Bell Aircraft Corporation, Buffalo and Niagara Falls, New York.

BELL *Aircraft*

AIRACOBRAS for victory—future planes for peace

BUY WAR BONDS AND SPEED VICTORY

"DOC" IS A FLIGHT SURGEON who says his work doesn't amount to much. He'd much rather talk about "my boys," members of a fighter squadron with a haircurling record. He even depreciates the special emergency kits he rigged up and supplied each pilot. But from other sources you learn of their value.

Not long ago, for example, one of his pilots had to bail out at about 20,000 ft. He only made one error—an error that couldn't be covered by Doc's instructions. He cracked his chute immediately, and the Jap kept making runs at him, shooting (and missing) till his ammunition was exhausted. Naturally unsatisfied, the little son of the setting sun made one final run—and his prop took off half the American's left foot.

Reaching into Doc's kit, the lad got out a shot of morphine and administered it to himself. Then, still floating seaward, he went to work. He took off the mangled shoe and sock, then removed his other shoe and made a tourniquet of the good sock. When he hit the water he put out his "shark medicine," and then rolled on top of his collapsible dinghy so that when it inflated he was inside. Finally, he dusted the wound with his sulfa powder, dressed it with gauze, and took his second shock pill.

Fortunately he was picked up almost immediately and taken directly to a base hospital. Because of his self-treatment, administered as he parachuted, surgeons were able to go to work right away; they didn't have to treat him for shock first.

Try to laud Doc for his kit and instruction and the only comment you get is, "that boy really had presence of mind. I sure was proud of him."

• Washington note: A hand-written card, signed by the janitor of a building we visited, advised passengers that "This elevator has just been oiled. That's the odor." With both thermometer and humidity pushing 100 on that particular day, the message relieved us no end.


• A route application to end all applications has been filed with the CAB; it is for "excursion service" and would permit the applicant to fly from any point to any other point in the country.

• The Pitifully Perplexed Personnel Manager reports that "if all the committees who went to the West Coast to study the manpower problem had just stayed and taken jobs there'd be no manpower problem."

• Pertinent question of the month is asked by the advisory board which represents 1,400 employees of a leading welding equipment manufacturer. On learning the company contracts were being renegotiated for 1942, this board wired the government representative: "We are producing at more than four times the rate per manhour of any of our competitors, as you know from your investigation. How much must we reduce this efficiency and raise costs to keep from being penalized in renegotiation? Please be specific. Should it be reduced ¼, ½, ¾, or more?"


SIDE SLIPS

• Going into Fort Worth, passing the famous stock show and rodeo buildings recently brought a severe case of nostalgia. It had been so long since we'd seen a steak we thought it would be nice to stop and look at one, even though it might be on the hoof. But there wasn't even a hunk of hamburger in the place. Instead of gazing on the contented face of "Susie Duroc 1598574" you see airplane wing jigs; where 4-H Club boys and girls once quieted their sleek yearling steers, you hear the whine of saws; where famed "Five Minutes to Midnight" kicked the saddling chute and bronc riders, you hear the louder thud of a drop hammer. Globe Aircraft had taken over; so through portals where once passed the most beautiful potential filet mignons and prime ribs in the world (remember?) now go airplanes—the Beech-designed AT-10 bomber-crew trainers. Believe it or not, they looked *better* than steaks.

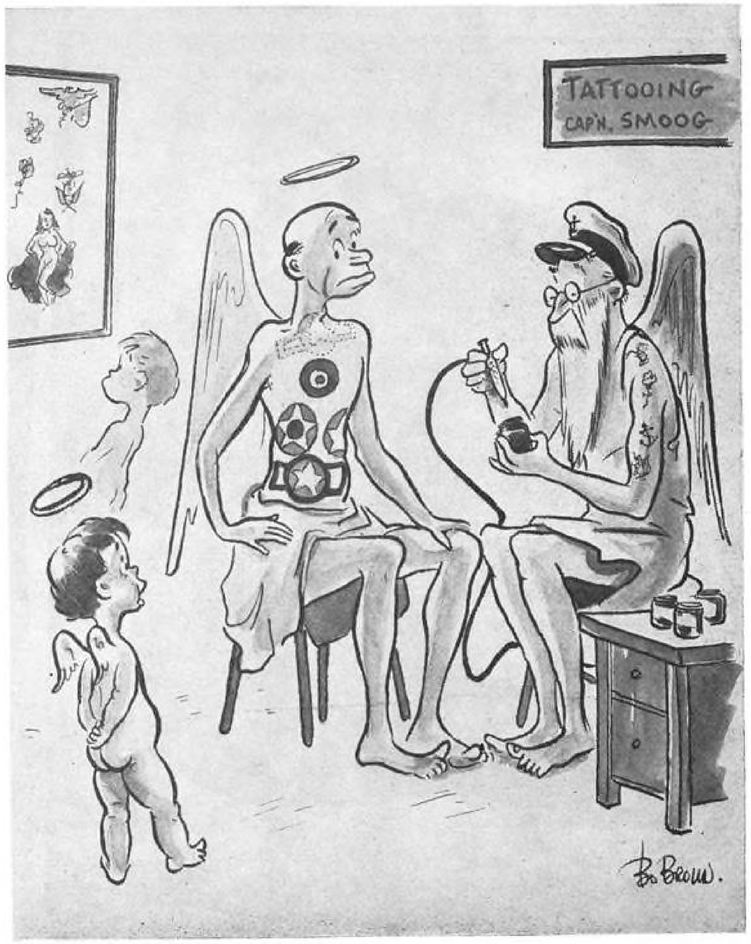

If they change the aircraft insignia any more, Mr. Maguire, you're going to have to get some new skin.

YOUR MACHINES ARE ONLY AS GOOD AS THEIR CUTTERS

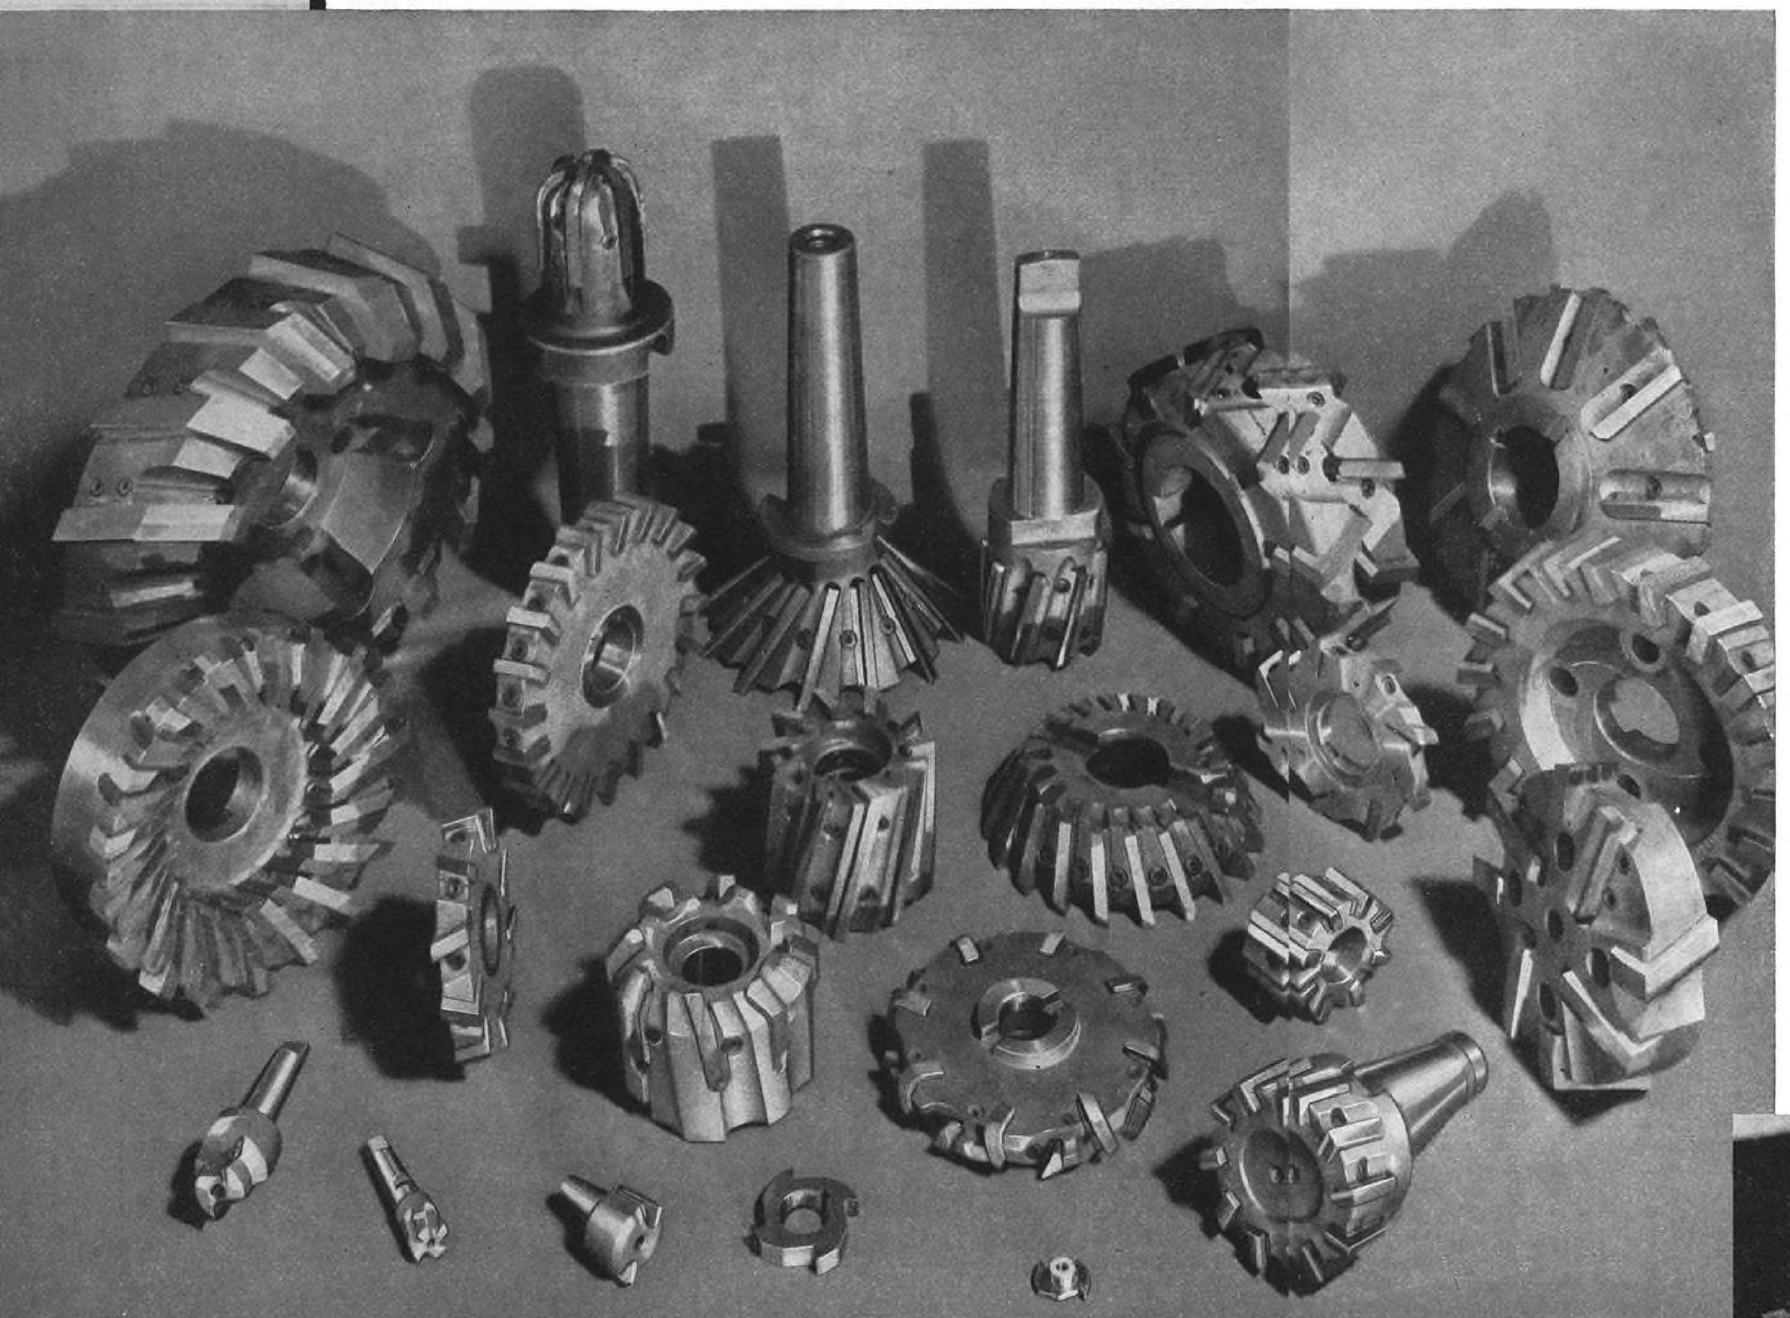

Your machine, regardless of how well designed and equipped in other appointments, gives the best performance only when operated with cutting tools designed for the job.

•

As a natural consequence of meeting and solving many machine problems in milling, Ingersoll has developed a line of milling cutters in types and sizes to suit the conditions of the work. These include cutters for face-milling, end milling, side milling, slotting, channeling, slabbing, form-milling, and many types of boring.


•


If you are not entirely satisfied with the performance of your machines, investigate their tooling. One example of how you may benefit is described at the bottom of this page.

•


In stating the conditions of your work give (1) Kind of material being cut. (2) Width and depth of stock removal. (3) Nature of cut, such as face-milling, slotting, etc. (4) Type of machine drive. (5) And if convenient a sketch of the work-piece.

The same machine was used in both steel milling cuts shown below. The Shear Clear cutter on right, designed for jobs of this type, removed twice the amount of stock in less than half the time. The Shear Clear consumed less power and produced a smoother finish. Are you using the proper cutters in your shop?

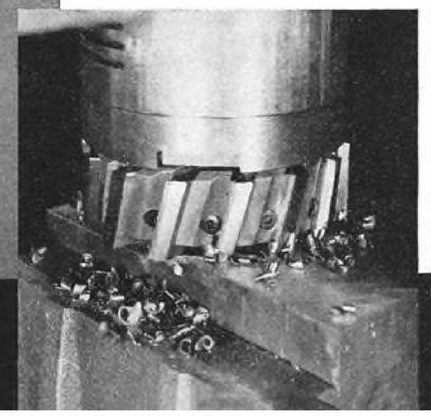

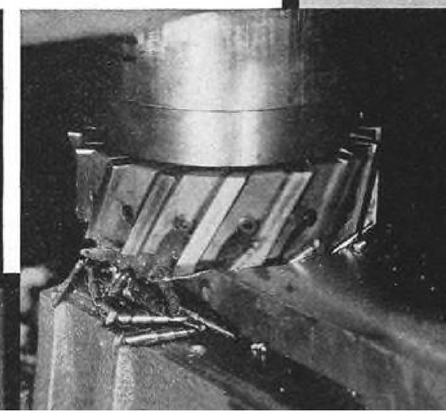

THE INGERSOLL MILLING MACHINE CO., ROCKFORD, ILL.

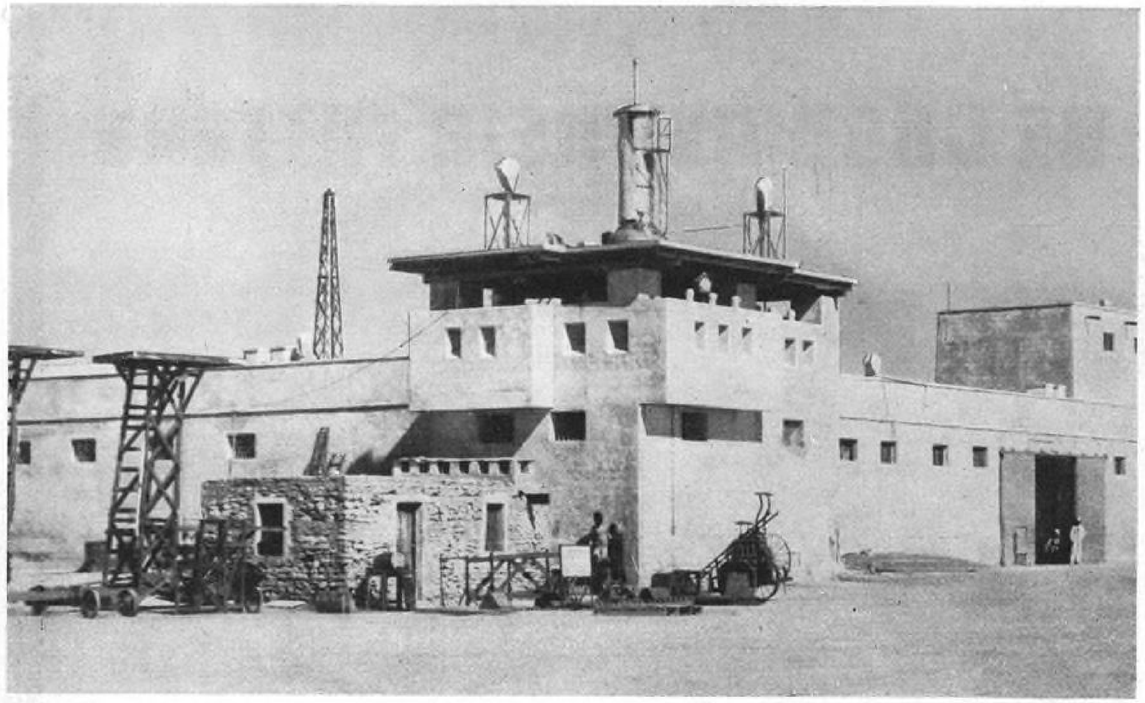

Modernism of Britain-to-Australia air route utilizes ancient Fort Sharjab, on Oman coast. Radio, meteorology, and beacon lights occupy corner watchtower where troops once kept weather eye out for hostile raiding tribes.

They Skyblazed Africa and the East "Way Back When"

Today's war takes flyers to many strange skyports. But it was yesterday's pioneers who hewed out the basic airways encompassing them. Told here is how England painstakingly launched prewar air routes over the "Dark Continent and beyond"—thus laying a potent cornerstone for postwar operations.

THE DAY KING GEORGE V was crowned in 1911, England saw its first airmail, a special flight from Hendon, just outside London, to Windsor Castle. By the time King George celebrated his silver jubilee in 1936, that first airmail flight of less than 20 mi. had developed into regular airmail service of over 13,000 mi. from England to Australia and more than 17,000 mi. to South Africa.

This was a startling growth in the short space of 25 yr., a development span interrupted by the long war years in the 'teens.

Toward the end, and also for a short period after the end of the last war, RAF planes carried military mail between London and Paris and, later, between Folkestone and Cologne. During the 1919 railway strike in England, 50 RAF aircraft were utilized for carrying domestic mail. Later, services to Paris and other Continental cities were rapidly multiplied.

While developing internal and Continental air routes, however, Britain had an eye farther afield—on the Dominions and Colonial Empire, Africa, the Middle East, India, the Far East, and Australia. It was in these far-flung domains that Britain concentrated on developing the rapidity of communication and transport which the young science of aviation could give. The story of the building up of these thousands of miles of overseas air routes is an epic of pioneering.

Only a month after World War I ended, RAF survey parties left for Cairo. Despite many difficulties, a survey of the route from Cairo to the Cape, across the African deserts and jungles, was completed by the end of 1919. For the next 10 yr. the route was the scene of many experimental flights by the RAF and some record-breaking attempts by private flyers, notably Sir Alan Cobham. But establishing a regular commercial route was a slow business due to the gigantic task involved.

In 1930, Imperial Airways, one of the constituent companies of the present British Overseas Airways Corp. formed just prior to the present war, took over this route. Dominion and Colonial authorities readily cooperated, not only helping financially but providing the necessary ground organizations. As men were trained in England to man the new air stations, others were out along the routes building airdromes, with hangars, workshops, and accommodations for passengers and staff, and for studying weather conditions and climate. Transport of fuel supplies had to be arranged in the difficult, and often almost impassable, terrain of fever-haunted jungle and scrub. In the vast swampy area of the Sudd, which stretches for hundreds of miles south from Khartoum to Lake Victoria, construction of airfields to stand up during the rainy season provided a tremendous problem.

It was solved by the use of flying boats on this section; they were moored on the Nile and at Kisumu sheds, and a slipway was built so the flying boats could be brought ashore for overhaul. Later, hardened runways were installed and a good all-weather airdrome resulted.

Other fields were built in the jungle. Here, it was necessary to take special precautions to protect passengers and staff from wild animals.

Altogether, 26 main dromes were constructed on the Cape-to-Cairo route, and 50 emergency landing grounds were prepared. At 17 of the main fields, radio stations were built. At many of the airports, fuel had to be brought in along bush paths by native porters.

In the tropical regions, radio communication was extremely difficult. A joint investigation by the Marconi Co. and Imperial Airways resulted in the development of equipment to enable two-way communication between the air and ground on medium and short wavelengths.

By early 1931, the African route had

(*Turn to page* 281)



"Delia," a deHavilland 86 which, with its sister plane "Daedalus" pioneered trans-African commercial route from Khartoum, Anglo Egyptian Sudan, to Lagos, Nigeria, in 1936. Here, at intermediate landing field, left wheel has sunk out of sight in treacherous ground.



"Airport" at Fort Lamy, French Equatorial Africa, during early days of Khartoum-Lagos trans-African operation. Runway is of brick construction.



African natives who have never seen trains have long been used to aircraft as first RAF, then Imperial Airways, extended British airways net.



Absence of landmarks in desolate stretches of Syrian desert on the Amman, Transjordan, to Bagdad route made it, in some respects, more difficult than African runs. Deep furrows, such as these, were plowed at intervals by groundcrews to guide pioneering pilots to the landing runs.



IT'S no accident that that statement appears regularly in communiques from battles areas. It's been planned that way.

American planes and engines have been carefully designed—built to the most exacting specifications. American pilots and crew members—the world's finest—have been carefully selected, thoroughly trained.

After every flight, ground crew men—men who received intensive training, passed rigid examinations for mechanical ability—take over. Engines, planes and instruments are checked with infinite care—adjustments made wherever necessary—every precaution taken to insure mechanical perfection on the next expedition over enemy territory.

It's a safe bet that BONNEY TOOLS play a leading part in making sure of that perfection—help make necessary adjustments quickly, easily—help make possible many of those thrilling, heart-warming reports. Because with tens of thousands of engines produced by leading aircraft engine manufacturers BONNEY TOOLS are standard, original equipment with every engine shipped—selected because of quality proven through the years—quality that has earned them the reputation "the finest that money can buy".

The best engines and planes, skilled fliers, expert ground crews and BONNEY TOOLS—an unbeatable combination. All play their part in helping make possible the safe return of planes carrying America's Fighting Men of the Air.

BONNEY FORGE & TOOL WORKS, ALLENTOWN, PENNSYLVANIA



Make Your Reservations Early

AIR TRANSPORT



Travelers do not realize what a vast, efficient combination of men and machines is put in action when they telephone requests for information regarding airline reservations. UAL's skillful system of handling passenger traffic is explained here.

Under United Air Lines reservations system, chief reservations clerk, control clerk, and control desk chief decide in a few seconds whether space requested is available.

IN ITS POLICY of improving wartime reservations service United Air Lines insists that its clients be served more efficiently, if possible, than in peacetime and that every DC-3 *Mainliner* be employed to the greatest possible advantage.

War travel has put the reservations department of the line to the test. Non-priority passengers frequently must yield seats to those on war missions, to expedite whose travel United today has 300 persons in its reservations service, all of them trained for months before they handle even a simple request.

Stations of United Air Lines are linked by a network of communications, so that a request for a seat on a flight to be made from the opposite coast can be handled in ten minutes and for a local flight in as little as two minutes. United's communications system comprises circuits spanning 7,800 mi. and connecting all offices simultaneously. Ten key centers are connected on separate trunk lines to avoid bottlenecks. At the switching center messages are recorded on a tape which passes to a transmitter and, without further attention from the operator, are forwarded to the proper station.

A feature of the switching center is the master sending unit which was developed for speed in getting messages to a number of addresses simultaneously by inserting a plug and depressing the push buttons controlling the various circuits. In the switching center are also located radio operators. Western Union and Postal Telegraph machines, and an elaborate network of telephones to various local offices. UAL has 20 leased telephone circuits in each of its major reservations offices. Five of these are direct hookups with traffic offices—one at the airport terminal and others at key points in the city.

With this communications system, queries are transmitted and answers relayed swiftly. Calls received at Chicago run two per minute, during the busy period and one a minute for a daily average.

To understand how this work is performed it would be helpful to follow a reservations request. Let us suppose that John Doe says he is interested in a reservation from Chicago to New York on the 5 p.m. *Mainliner* on Nov. 15. The operator routes the call to a

They battle the enemy with bombs and bullets

...they baffle the elements with VALSPAR



Scourge of the seven seas, "Buccaneer", the Navy's Brewster Bomber, teams up with other carrier-based planes like the F3A fighter—famous "Corsair"—in carrying the fight to the enemy unceasingly.

No less constant is the daily battle against the corroding action of wind, water, sea and sun. Metal though it is, the precious skin of fighting ships needs a finish that fends off the fury of the elements, and camouflage to foil searching enemy eyes.

Brewster finds Valentine's Valspar Val-Aero furnishes that finish very satisfactorily, says—"all of our bombers use some of their products. Some of our bombers are completely covered with Valentine finishes—primers as undercoat and colors as camouflage."

We find a great thrill in the knowledge that our products are helping the fight for freedom.

VALSPAR
VAL-AERO

PRIMERS, LACQUERS, ENAMELS. *A complete line of dependable Aircraft Finishes—that meet Government specifications. • Valentine & Company, Inc., 11 East 36th St., New York, N.Y. Established 1832. • Makers of the Famous Valspar Finishes*







Typical communications center is this unit at Chicago. Teletype enables reservations staff to communicate simultaneously with all offices on United Air Lines' 7800-mi. system.

sales person handling requests for reservations on this particular flight and gives the name of the prospective passenger. The saleswoman then jots on a reservation card the name, address, business address, telephone number, whether limousine pickup is desired, and the name of the person requesting the reservation if it is other than the prospective passenger. If the prospect is a regular traveler most of this information is already in the "telefile," an index of frequent passengers.

If, however, Mr. Doe is not a frequent traveler the telephone salesperson prints the above information on the card, also the first stop-over point and the date on which the reservation was requested. This last information is important because postponed reservations are handled strictly in rotation. The salesman—or more often saleswoman—then checks with the space control desk; for if a seemingly insignificant error is made there, it is quite possible that a flight may be oversold.

If the space control agent has an empty seat through to New York in his control, he confirms the reservation and notes the passenger's name on the control chart for Flight 48 of Nov. 15. If he has no through seats to New York in his control, he has other alternatives. Should he still have a seat to Toledo, he might call United's Toledo office, asking for a seat from Toledo to New York. From Toledo would come one of two replies: CONE DOE ATLYNY 48-1, or UNAC DOE ATLNY 48-1.

The first message confirms the reservation, giving Mr. Doe seat no. 5 (signified by letter "E"); the second states that Toledo's space is sold and that they have two others on the waiting list. If Toledo is "unable," Chicago will determine whether there is a seat for him from Chicago to Cleveland. If Cleveland has space, Chicago will book Mr. Doe from Chicago to Cleveland and then from Cleveland to New York on Cleveland controlled space. If none of these bookings is possible, the passenger will be advised that an attempt will be made to book him on a later flight.

By the use of the two-way telemeter system, inter-office communication regarding the reservation is so efficient that the request can be handled while the client waits momentarily at a telephone.




Before each clerk in space-control center are charts for each scheduled flight. Here allotments are made and space information forwarded to sales department.

United Air Lines service department provides fast accurate answers to innumerable questions asked by prospective travelers about schedules, fares, connections, limousine service to airports, and many other matters. This center also specializes in handling calls from outlying stations in area.



Increasing numbers of reservations require maximum speed and efficiency in handling calls. UAL "screening" method switches calls regarding certain trips to personnel assigned to handle space on these flights. This view of New York office shows clerks with trip cards before them for ready reference.

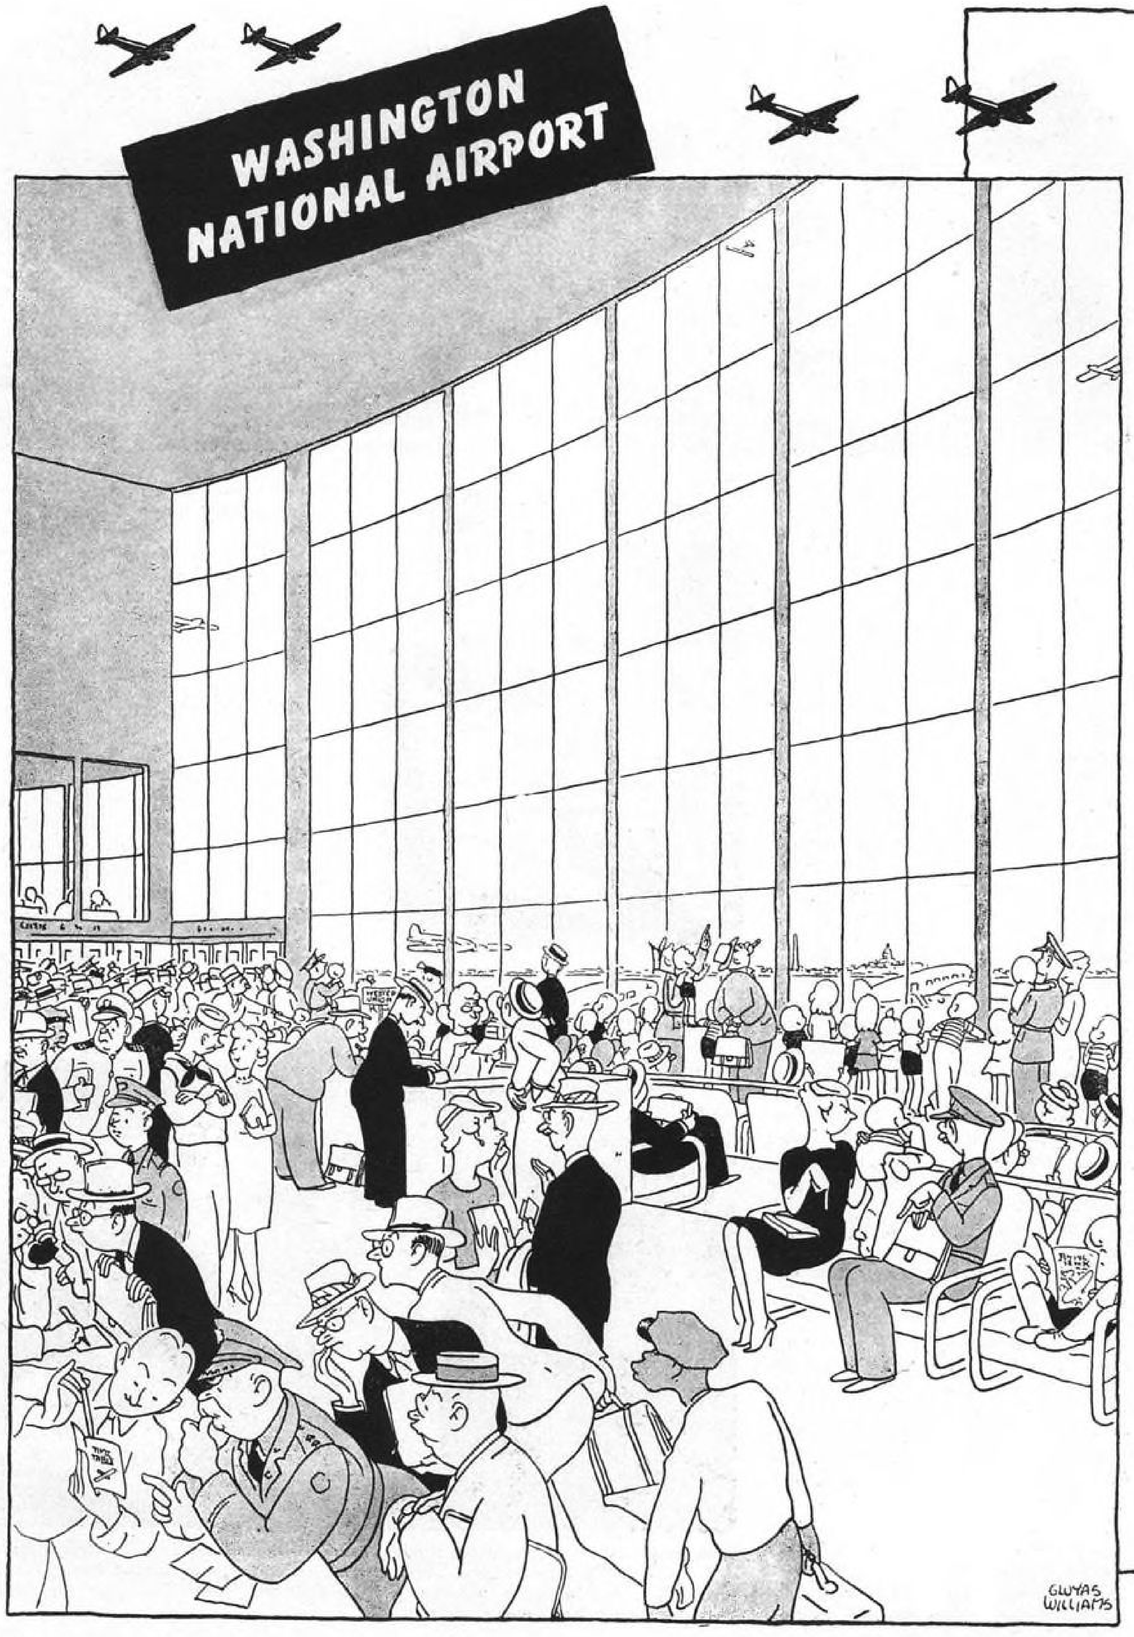

← Illustration courtesy The New Yorker Magazine

...WHERE PLANE TRAFFIC IS BUSIEST
CUNO FILTERS PROTECT ALL FLIGHTS

1201 take-offs and landings in one week at the National Airport — where three leading airlines, American, Eastern, and Pennsylvania Central, converge on the nation's capital.

Every plane was checked — and *every plane* was found equipped with Cuno Filters, assuring constant flow of clean fluids to vital parts.

Cuno was the first, you know, to develop filters for positive, uninterrupted removal of sludge in aircraft engine lubrication. As a result of continuing collaboration with aeronautical designers, other aircraft fluid systems, such as hydraulic control, supercharger lube, and glycol heating systems, are now also Cuno-protected.

Today, most engine and aircraft builders use Cuno Filters because they provide non-stop protection . . . because their dependability has been proved by millions of miles in the air . . . and because the maintenance problem has been reduced to a minimum.

CUNO . . . A SAFE SHORT CUT IN MAINTENANCE

Cuno Filters are continuously cleanable, and operate without attention for much longer than the longest flight. Our maintenance-advisory staff, working closely with service depots, has conclusively established the speed and ease with which Cuno installations are kept at top-flight performance.




COMPLETELY AUTOMATIC FILTRATION

Cuno's self-cleaning filter was developed with the assistance of prominent aviation engineers. Mounted on the filter is a tiny hydraulic motor powered by the oil it helps to keep clean. By this means the filter element is continuously rotated past cleaner blades which positively comb out all imbedded as well as adherent solids — automatic protection against sludge and undesirable solids as long as the system is under pressure.

CUNO ENGINEERING CORPORATION
711 South Vine Street
Meriden, Connecticut

KEEP FLOW ON "GO" WITH
CUNO
THE "FILTER-FINE" STRAINER

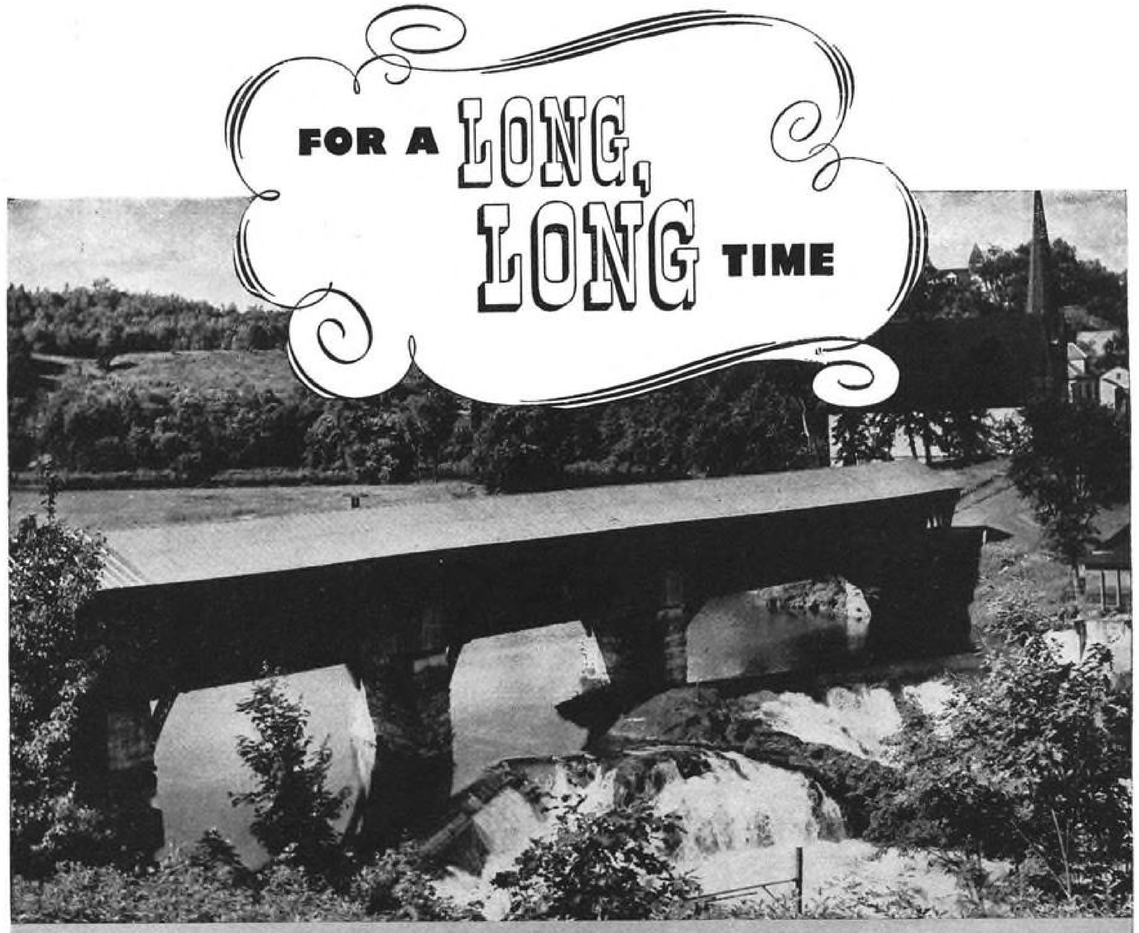

One reason why Tobe Capacitors have forged to the front is their consistently long life. But there's another reason — the successful pioneering work of Tobe engineers.

Take as an example the CA—355, shown below in streamlined, hermetically sealed drawn container. It is being used in large quantities by the U. S. Army Signal Corps in front line telephones.

Tobe is the only manufacturer furnishing this capacitor in a drawn container.

The CA—355 is just one instance of Tobe engineering ingenuity in developing and perfecting new devices. However tough your own condenser problems we invite the opportunity for our engineers to help you solve them. Please get in touch with us.



LONG-LIFE ASSURED

For This Unique Capacitor

SPECIFICATIONS—CA—355
Wax impregnated, wax filled capacitor

Capacity Rating:.....2.0—0.5—0.3 mfd.
Voltage Rating:.....200 D C
Power Factor:..@ 1000 cycles .01 maximum
Resistance:....2000 megohms per microfarad
Dimension: 1" depth—2½" length—2⅛" height

Meets requirements of U. S. Army Signal Corps

TOBE DEUTSCHMANN CORP. TOBE CANTON · MASSACHUSETTS

A small part in victory today—**A BIG PART IN INDUSTRY TOMORROW**

How AA's Propeller Shop "Keeps 'Em Turning"

By EDWARD E. THORP

MAINTENANCE

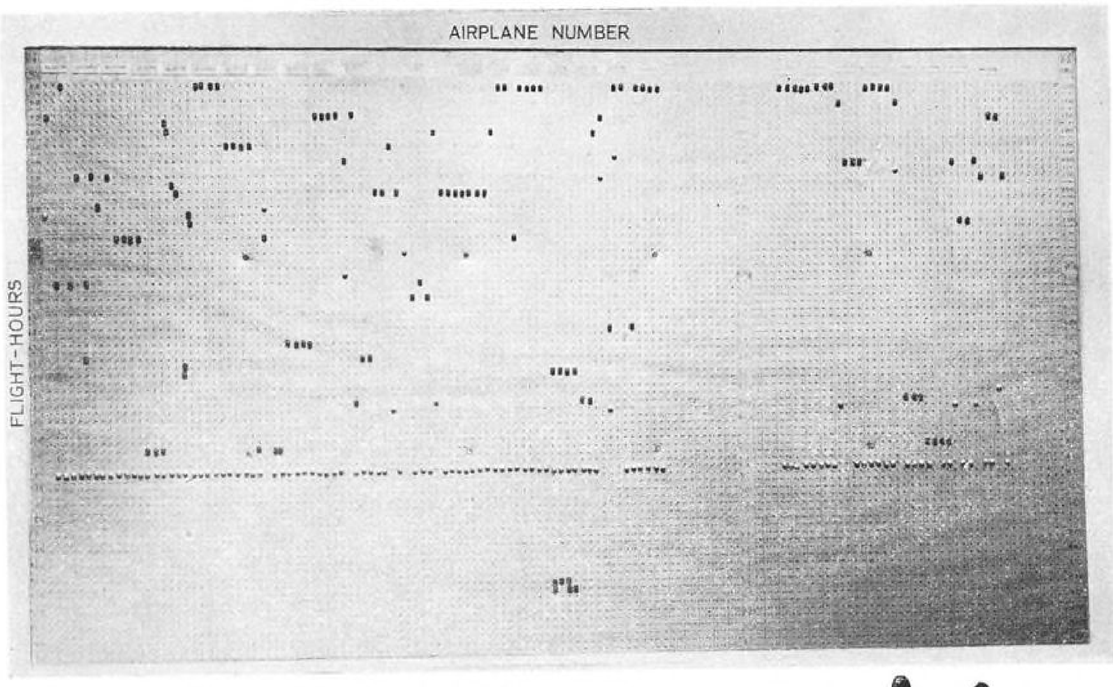


Fig. 1. On this board is kept record of each airplane, engine, and propeller. Line of white pins represents 650-hr. overhaul period.

A single, comprehensive shop handles all propeller overhauls for AA's nationwide system. Detailed here are the precise means by which airscrews are maintained at top efficiency.

REGARDLESS OF DISTANCE, all propellers used by American Airlines are overhauled and serviced at the company's shops at LaGuardia Field, N. Y. By concentrating this work among highly skilled specialists, the efficiency of the operation has been raised to a point where a three-blade propeller usually is completely overhauled in 32 man-hours. Highest output for one month, so far, was 78 propellers, where two shifts were employed.

Though all the mechanical operations are handled in a shop 40 ft. x 60 ft., the method of routing the propellers on the floor is such that crowding and bottlenecks are entirely absent.

To record the flight-hours of the engines and propellers, a planning board (Fig. 1) is used which deserves specific mention. This board, measuring about 30 in. x 36 in., is made with a soft backing which will hold pins. On its surface is pasted a chart, ruled in vertical columns, one for each airplane. Horizontal lines are used to indicate the number of flight-hours. Over the face of


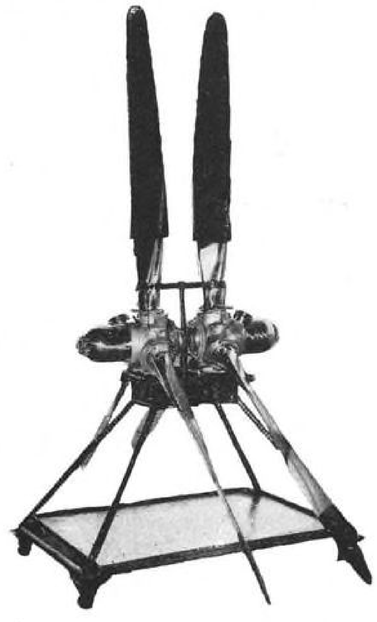


Fig. 2. Storage stand built by American Airlines.

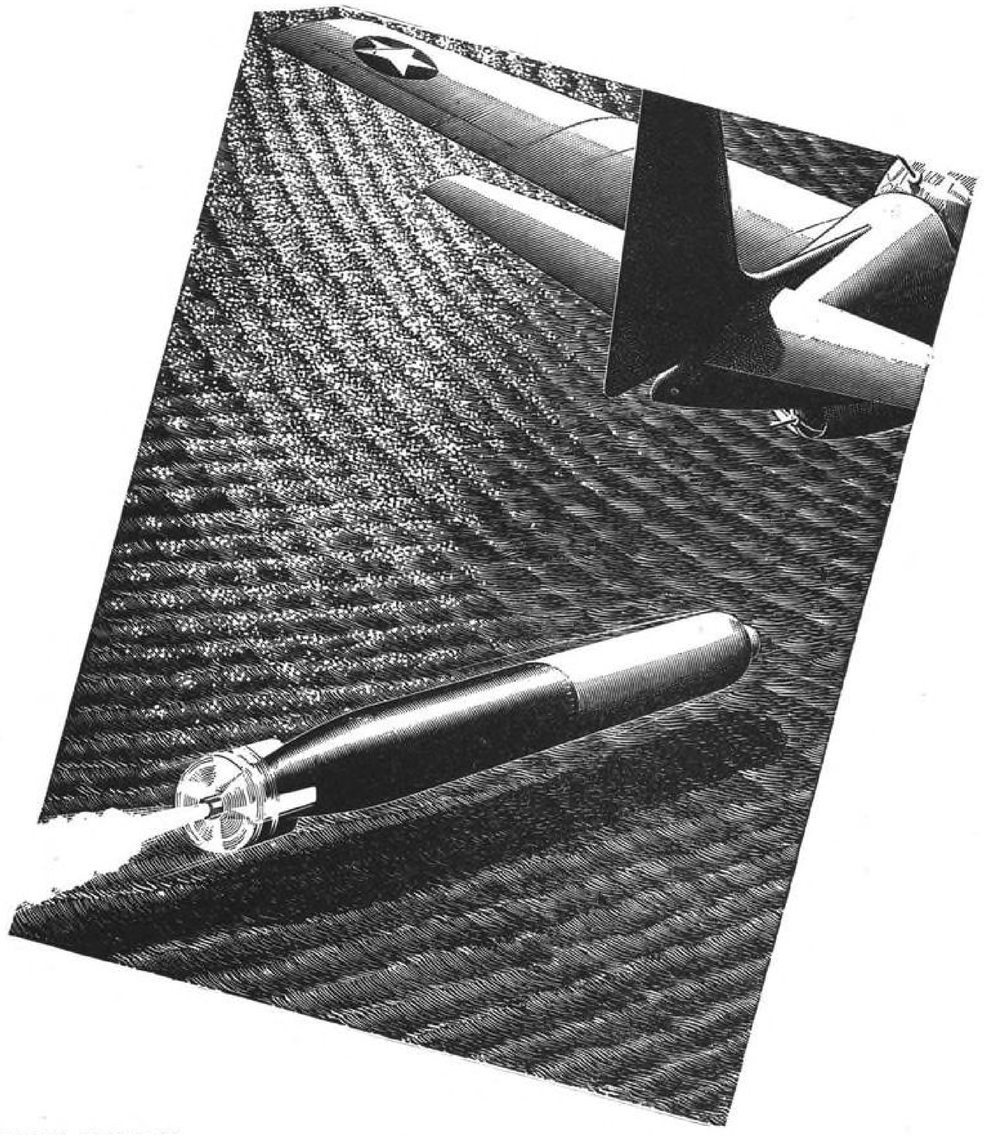

DESTRUCTION ... *made to order*

AMONG ALL the missiles man has contrived to hurl death at his enemies, the torpedo is unique.

No other projectile is so complex, so carefully engineered, so "made to order" for destruction. Driving the deadly "warhead" is an intricate mass of motors, shafts, instruments—and *bearings*. Ball bearings—without which neither motors, shafts, nor instruments could "do their best work."

The torpedo is one more illustration of the fact that there is no more vital factor in the mechanized war we fight today than anti-friction bearings. They literally *make possible* the *sustained* action of our more important tools of war.

New Departure is making bearings by the tens of millions. In fact New Departure has a major responsibility in the whole ball bearing war production program.

3207



THE TIME IS NOW


Bearing application is a highly specialized art. Wisdom dictates consulting our engineers on new designs while yet in the formative stage.

NOTHING ROLLS LIKE A BALL

New Departure

THE FORGED STEEL BEARING

NEW DEPARTURE • DIVISION OF GENERAL MOTORS • BRISTOL, CONNECTICUT

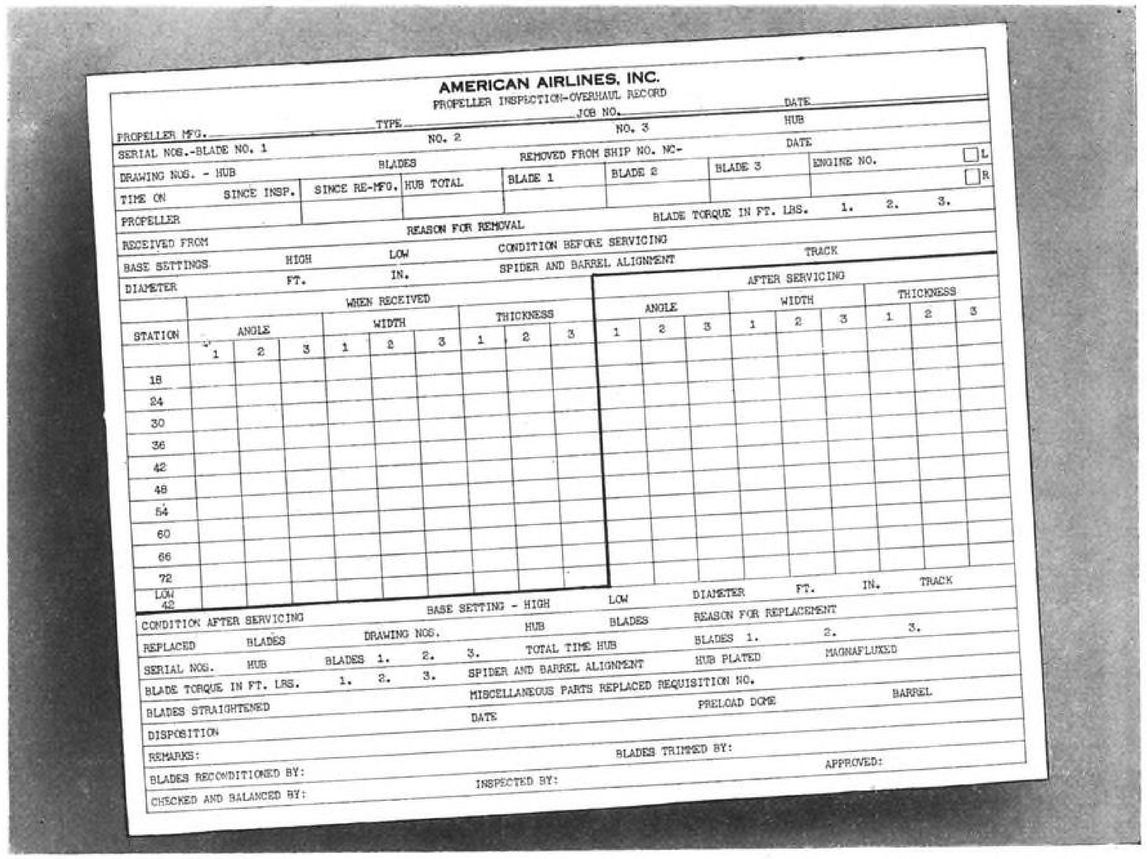

AMERICAN AIRLINES, INC.
PROPELLER INSPECTION-OVERHAUL RECORD

PROPELLER MFG. _____ TYPE _____ JOB NO. _____ DATE _____
SERIAL NOS.-BLADE NO. 1 _____ NO. 2 _____ NO. 3 _____ HUB _____
DRAWING NOS. - HUB _____ BLADES _____ REMOVED FROM SHIP NO. NC- _____ DATE _____
TIME ON PROPELLER: SINCE INSP. _____ SINCE RE-MFG. _____ HUB TOTAL _____ BLADE 1 _____ BLADE 2 _____ BLADE 3 _____ ENGINE NO. _____ ☐L ☐R
RECEIVED FROM _____ REASON FOR REMOVAL _____ BLADE TORQUE IN FT. LBS. 1. _____ 2. _____ 3. _____
BASE SETTINGS HIGH _____ FT. _____ IN. LOW _____ CONDITION BEFORE SERVICING _____ SPIDER AND BARREL ALIGNMENT _____ TRACK _____
DIAMETER

STATION	WHEN RECEIVED: ANGLE 1	2	3	WIDTH 1	2	3	THICKNESS 1	2	3	AFTER SERVICING: ANGLE 1	2	3	WIDTH 1	2	3	THICKNESS 1	2	3
18																		
24																		
30																		
36																		
42																		
48																		
54																		
60																		
66																		
72																		
LOW 42																		

CONDITION AFTER SERVICING _____ BASE SETTING - HIGH _____ LOW _____ DIAMETER _____ FT. _____ IN. _____ TRACK _____
REPLACED BLADES _____ DRAWING NOS. _____ HUB _____ BLADES _____ REASON FOR REPLACEMENT _____
SERIAL NOS. HUB _____ BLADES 1. _____ 2. _____ 3. _____ TOTAL TIME HUB _____ BLADES 1. _____ 2. _____ 3. _____
BLADE TORQUE IN FT. LBS. 1. _____ 2. _____ 3. _____ SPIDER AND BARREL ALIGNMENT _____ HUB PLATED _____ MAGNAFLUXED _____
BLADES STRAIGHTENED _____ MISCELLANEOUS PARTS REPLACED REQUISITION NO. _____ PRELOAD DOME _____ BARREL _____
DISPOSITION _____ DATE _____
REMARKS: _____ BLADES TRIMMED BY: _____
BLADES RECONDITIONED BY: _____ INSPECTED BY: _____ APPROVED: _____
CHECKED AND BALANCED BY: _____

Fig. 3. Propeller inspection-overhaul record. A complete check is kept on this sheet of hub and blades. Portion to left and above heavy line is filled out on receipt of propeller and during preliminary inspection. Balance of sheet records work done in servicing and is signed by each man who does work. This and other related sheets form a life history of propeller.

the board is placed a sheet of celluloid, perforated with two rows of holes for each column. Colored pins are used to designate the engines and propellers and are moved down the columns as the number of flight-hours increases. At the point corresponding to the overhaul period—in this case, 650 hr.—a white pin is placed when the engine or propeller is installed, so that when one of the colored pins arrives at this point, the engine, with its propeller, is due for overhaul.

It is obvious that there can be no possibility of the equipment being run for longer than the specified time without overhaul, since the board supervisor will be visibly reminded of its status whenever he records the time of either the engine or propeller.

After the propeller has been removed

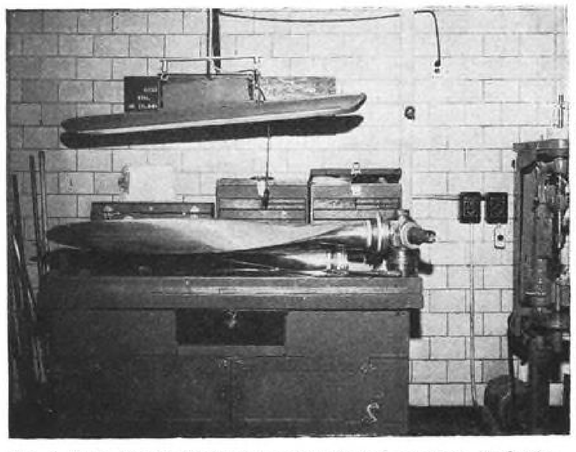


Fig. 4. Trim bench where blades are trimmed on edges. Each airscrew is handled as a separate job.

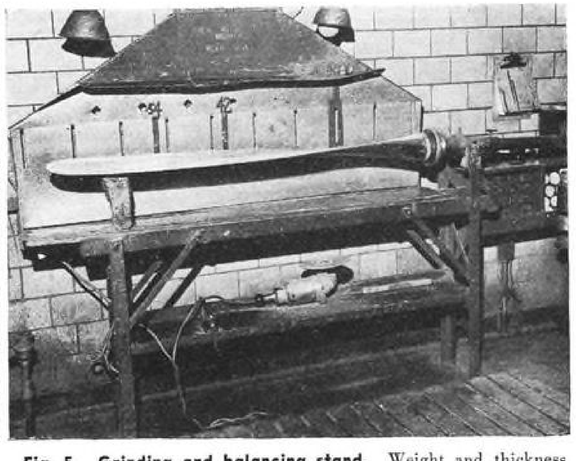


Fig. 5. Grinding and balancing stand. Weight and thickness are constantly checked as surfaces are ground.

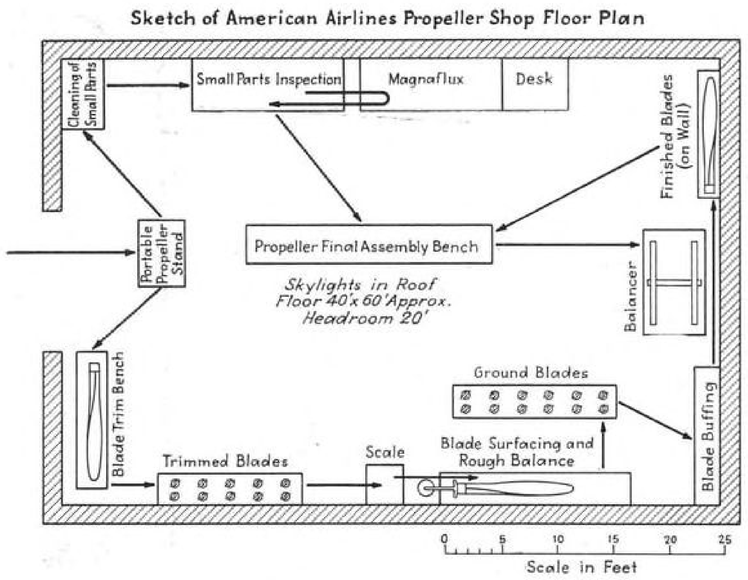


Fig. 6. Floor plan of propeller shop.

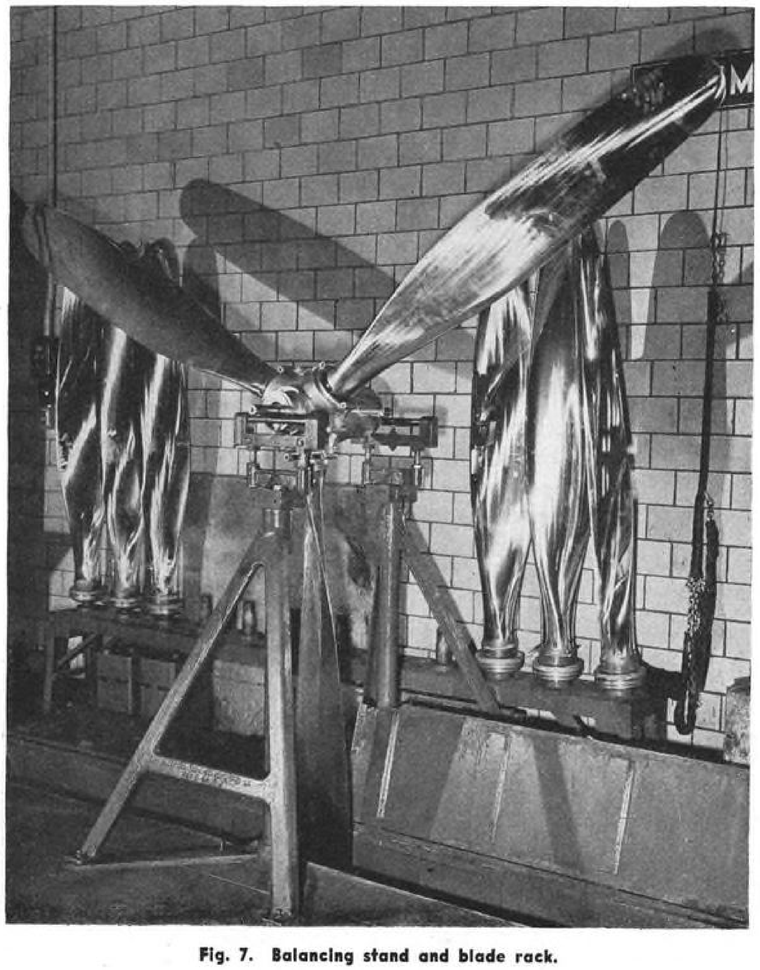


Fig. 7. Balancing stand and blade rack.

from the engine, it is mounted on a portable stand to await its turn in the shop. These stands are built in the airline shops from ideas originated by the men who do the work, and for this reason they are thoroughly practical.

When its turn comes for overhaul, the propeller is wheeled on its stand into the shop. Here the preliminary entries are made on the inspection-overhaul record (Fig. 3) while the propeller is being disassembled. On the rare occasions when straightening or machining are required, the parts are sent to another shop at this time. In any case, the blades follow a routing separate from that of the other parts, until final assembly is reached.

Blade Routing

First the blades go to the trim bench (Fig. 4) where each is handled as a separate job, though, of course, comparative dimensions are checked frequently as the work progresses. The center lines and cross stations are marked in pencil on the face of the blade, the stations being 6 in. apart. The mechanic then files the contour of the blade, to remove all blemishes, keeping within the dimensions given in the table of trim limits, which hangs on the wall behind his bench. Limit set by the manufacturers is ⅛ in., but American Airlines' own tolerance is .020 in. This meticulous attention to detail is evident at all stages of the work.

After entries are made on the record sheet, the trimmed blades are placed in the rack to await the surfacing operation.

The blades are next placed in the balance at the surfacing bench (Fig. 5) where they are surfaced with a portable

(*Turn to page* 290)

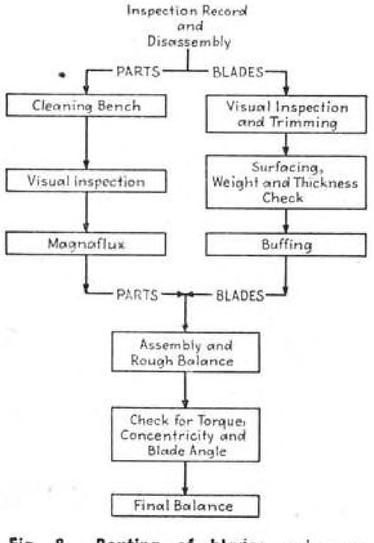


Fig. 8. Routing of blades and parts through American Airlines shop.



Let's first WIN this war!

We won't ever have a second chance—

The Gerjaps are waging a vicious determined war — a cruel fanatical war to kill, conquer and loot their foes — a war of no quarters and of no compromise — either we defeat them — or they will conquer us!

And unless WE win — neither we nor our children's children will ever have a second chance.

We here at Louis Allis are forcing our every effort in every way to help win this war — to get it over as quickly as possible.


Our engineering development department has created many outstanding — perhaps revolutionary — improvements in electric motor design — construction and performance —


Motors that are serving a major important role in helping your boy and mine win this war — to help bring him back home — safely — as quickly as possible.

Many of these important new motor developments will also play an important role in the post war period.

But now is not the time to discuss them — let's first WIN this war!

THE LOUIS ALLIS CO., MILWAUKEE, WIS.

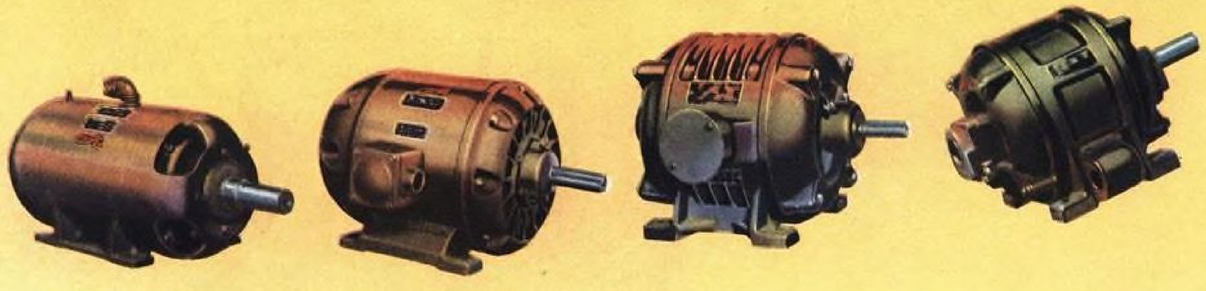

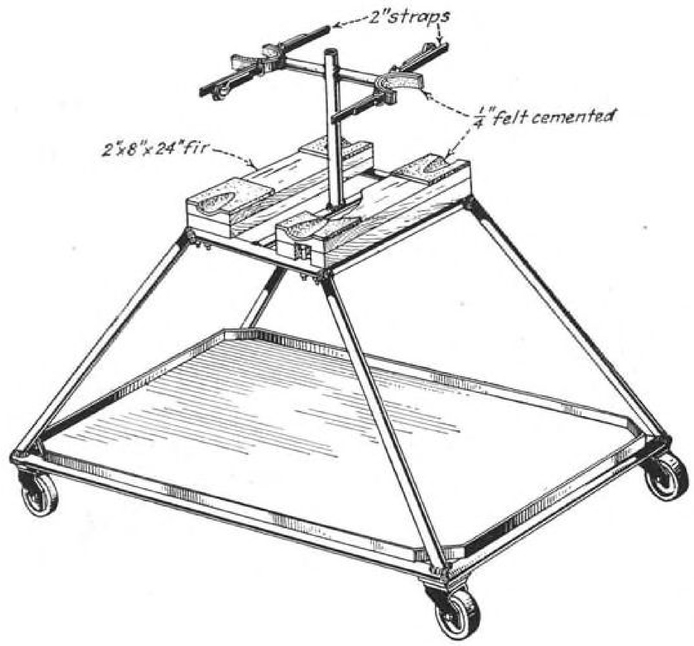


AVIATION'S MAINTENANCE NOTEBOOK

American Propeller Storage Stand


• American Airlines built a number of these stands for both storing and handling their 11½ ft. 3-blade propellers used on DC-3's. The frame is welded of iron pipe with a sheet metal drip pan which is also useful for tools and small parts when working on the propellers.

The vertical blade is held in the felt-lined fork by webbing straps while the other two blades rest in grooves in the fir blocks on the top platform. Two propellers are held in one stand with easy access to either one without interfering with the other. Ball bearing casters enable the stand to be moved with a minimum of effort.

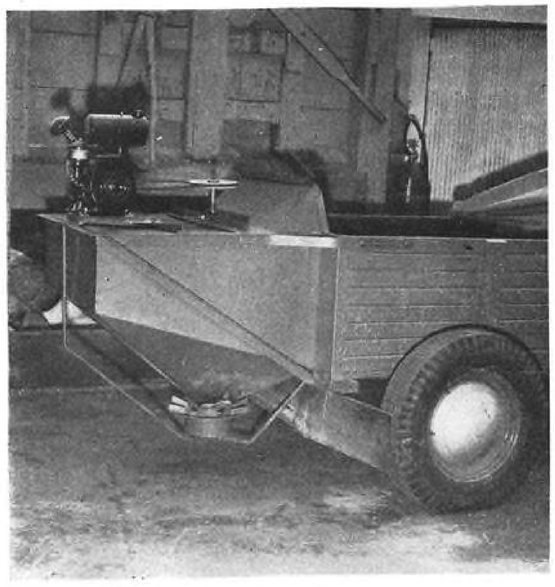

Centrifugal Sand Spreader by TWA

• For sanding icy ramps and areas around passenger terminals, TWA, after some experiment settled on this simple trailer unit, consisting of sand or grit hopper, ¾ hp. gasoline engine driving, by V belt, pulley and shaft, a bladed wheel. Operated at about 600 rpm. the device will evenly sand a strip about 30 ft. wide. It requires only two men to operate—one to drive tow truck and one to stand by trailer and engine. Has given good service for TWA.

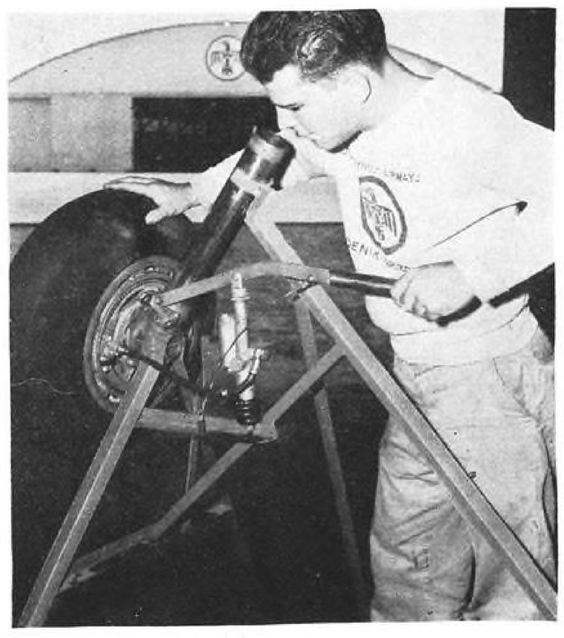

Southwest Airways Brake Assembly Tester

• Maintenance Superintendent Guy Polson of Southwest Airways devised this stand for testing brakes before mounting on landing gear. It consists of a spring landing gear section on an angle-iron stand, which also carries pressure device for testing relined brake shoes or trued drums. This machine may also be used for testing brake cylinders.



Unique research, engineering, tool making and production skills combine to build not only control devices that fulfill the most exacting requirements, but also to build special purpose devices for which no specifications exist. Our list of customers, the most exacting in government, aviation and manufacturing, attest to these skills.

Manufacturers of *Control Devices*


and Components . . . for Electrical, Electronic and Mechanical Applications

EAD

EASTERN AIR DEVICES, INC.


585 DEAN STREET • BROOKLYN, N. Y.


An Affiliate of **THE FRED GOAT CO. INC.,** ***Special Machinery Specialists Since 1893***

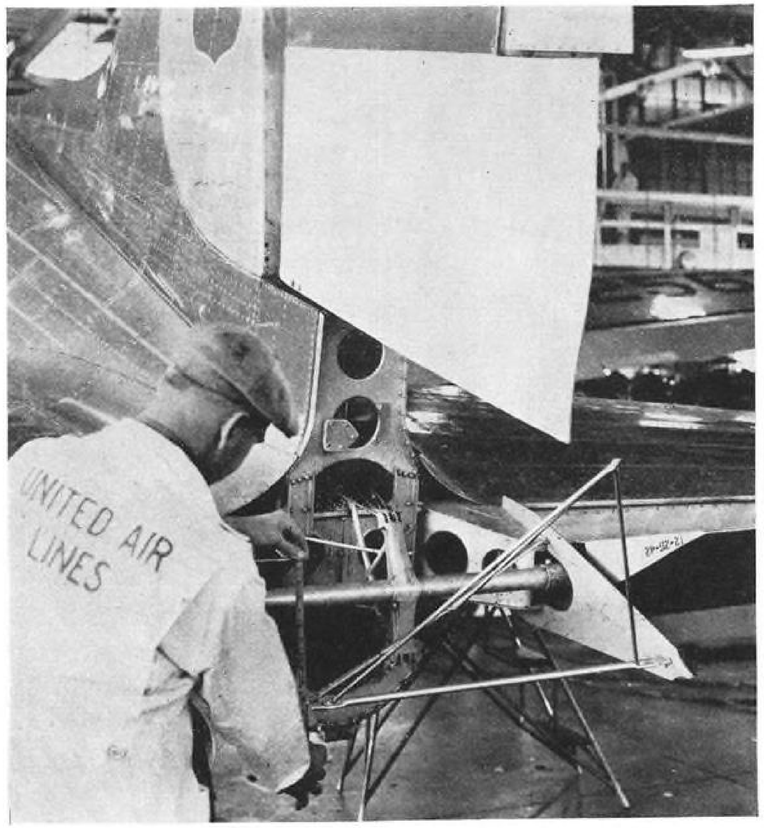

UAL Tail Surface Jig


• United Air Lines' central base at Cheyenne, Wyo. uses this jig for rigging tail surfaces. It is made from two plates of 1020 steel with 5/16 O.D. tube braces. Clamped to the elevator torque tube bearing supports, the device enables settings to be checked against one another and results in considerable saving of time. The jig was designed by Nicholas Barber of United's central maintenance base.

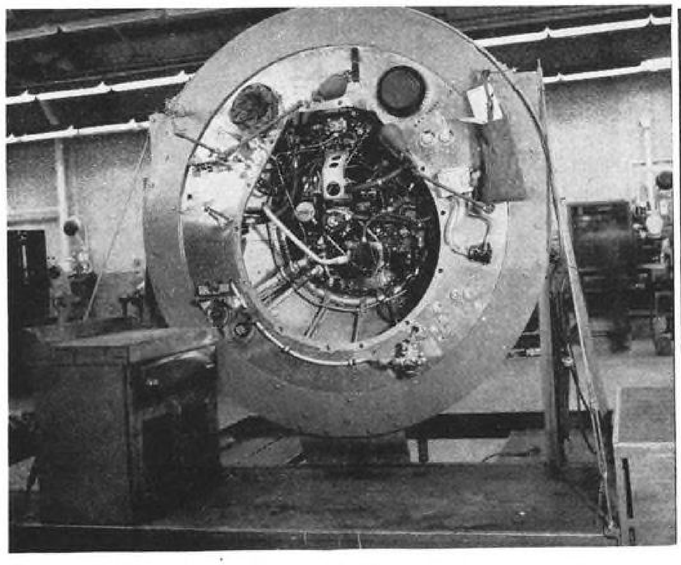

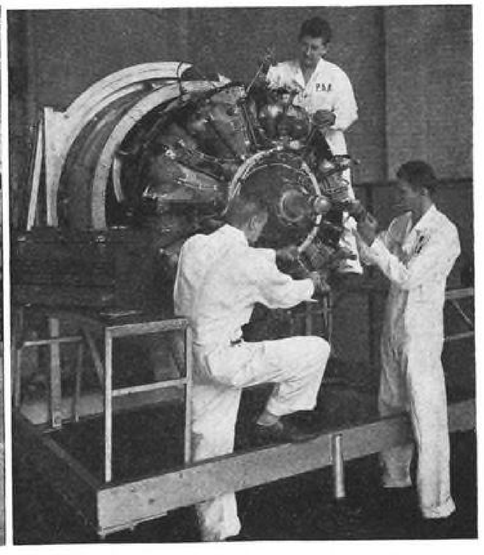

Pan American Engine Overhaul Stands

• Movable engine repair stands built by Pan American for Wright radials. They are wired with plug-in connection and two flexible joint extension lights which can be placed in any position for best vision. Side platforms hold tool benches with drawers, providing working surface and making tools accessible. These also are used to reach upper parts and can be moved where desired. Screw jack locking attachment keeps the stand from rolling.

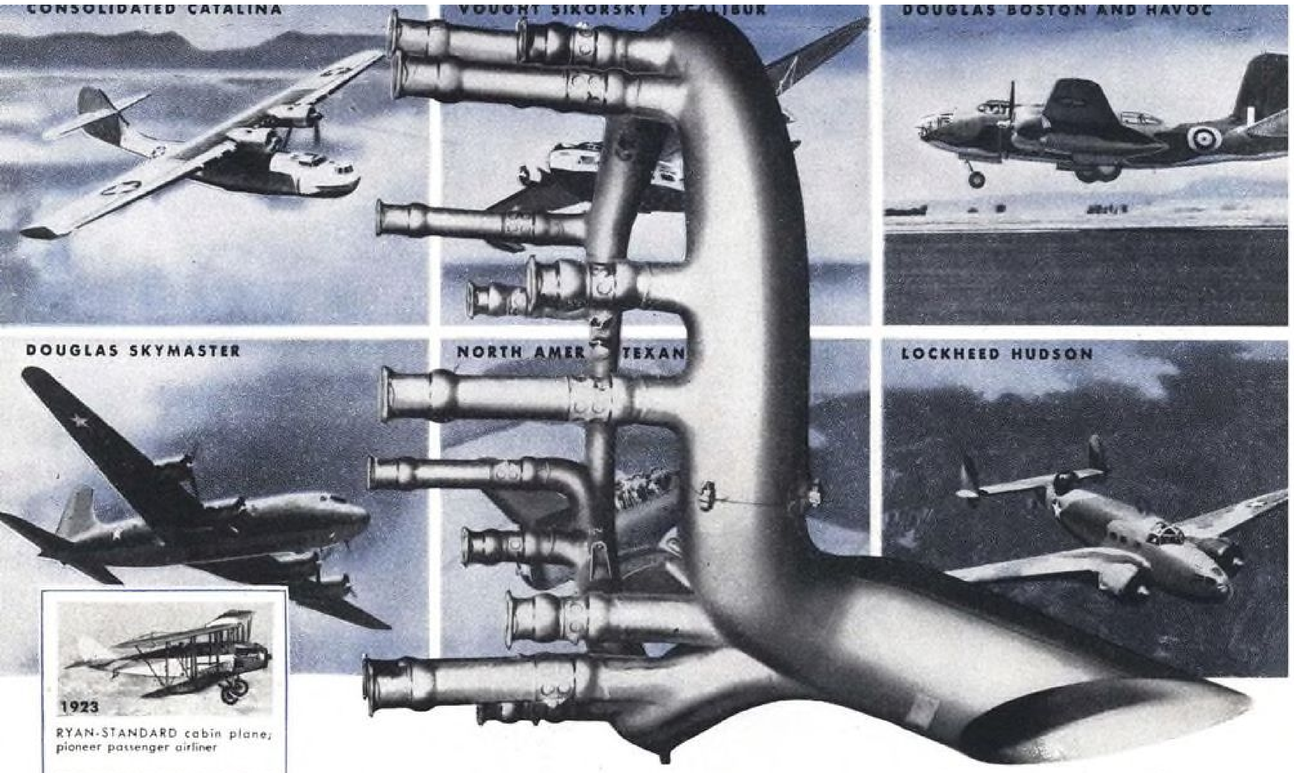

1923
RYAN-STANDARD cabin plane; pioneer passenger airliner

1926
RYAN BROUGHAM, widely used commercially and for many famous flights.

1937
RYAN S-C, cabin plane for private-owner use, featured all-metal construction.

1940
RYAN YO-51 "Dragonfly", Army observation plane with unique performance ability.

1941
RYAN NR-1, low-wing trainer used for formation flight instruction by Navy.

1942
RYAN ST3-S, seaplane trainer of same series as Army's PT-22.

1943
RYAN PT-25, superbly engineered plastic-bonded plywood trainer.

Proud Wings *for the Ryan Manifold*

Ryan Exhaust Systems control and convert to *new practical uses* the intense heat of the roaring exhaust fire of thousands of aircraft engine horsepower. That Ryan both *designs* and *builds* well is attested by this fact: The airplanes on which Ryan Exhaust Systems are standard equipment comprise a list of America's most successful military and commercial types. Six of these are pictured above.

Engineering and research departments at Ryan are responsible for some of the most important technical developments in the exhaust systems field. A procession of other improvements, refinements and new and ingenious solutions to exhaust systems problems, are now coming from the Ryan development section.

Ryan designs and manufactures manifolds, turbo-supercharger installations, heat transfer units for carburetion, cabin heating and wing anti-icing, and flame dampening and other specialized exhaust system applications. Ryan's design and development groups now serve the Army, Navy, and all aircraft manufacturers producing for the armed services.

EXECUTIVES AND TECHNICIANS of firms holding prime airframe and engine contracts can obtain a copy of the new restricted, photographically illustrated publication, "Ryan Exhaust Manifolds" by forwarding proper credentials to either address below.

RYAN

Rely on Ryan to Build Well



RYAN BUILDS WELL
Ryan construction, proven in aviation's pioneer days, now proven in war, will tomorrow produce safer, more useful peacetime aircraft.




RYAN TRAINS WELL
Ryan School of Aeronautics, famous peacetime air school, now training fine U.S. Army pilots, follows one creed: **Thoroughness.**




RYAN PLANS WELL
Modern engineering + flying experience. Typical result: Ryan exhaust manifold systems are now used on the finest planes of other manufacturers.

RYAN AERONAUTICAL COMPANY — MEMBER, AIRCRAFT WAR PRODUCTION COUNCIL, INC.
GENERAL OFFICES: LINDBERGH FIELD, SAN DIEGO — EASTERN OFFICES: 420 LEXINGTON AVE., NEW YORK
Ryan Products: Army PT-22s, Navy NR-1s, Army PT-25s; S-T Commercial and Military Trainers; Exhaust Manifold Systems and Bomber Assemblies.

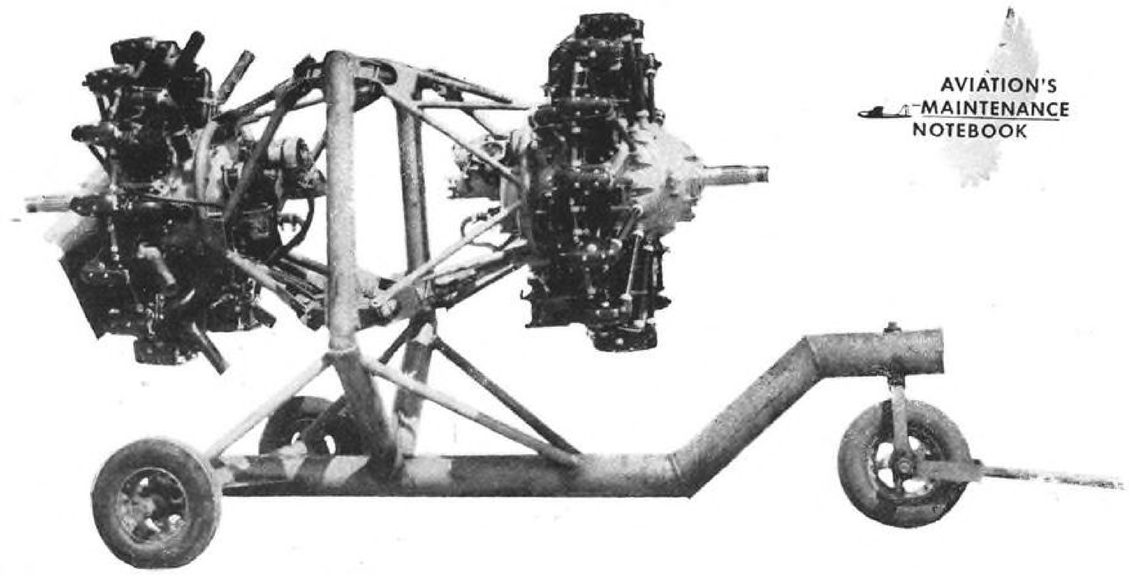

Engine Dolly by Aircraft Repair, Ltd.

• Built to carry engines from assembly to test cells, this dolly accommodates two engines at a time. When engines are attached, mounts are already fastened to the dolly. At test cell engine and mount are removed as one and attached to test stand. Construction is inexpensive, unit was designed and built by Aircraft Repair, Ltd. in Edmonton, Canada.

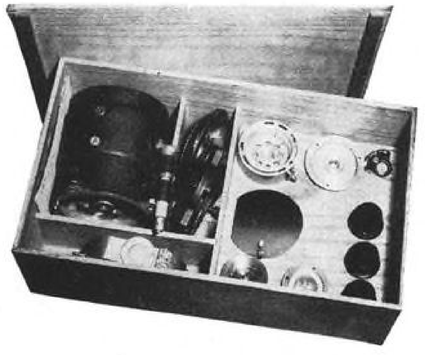

Gyro Horizon Parts Box at TCA


• Designed to keep the parts of any individual unit together if, during overhaul, work has to be stopped for any reason. Parts can be put in place without damage or danger of being mislayed, until work can be resumed by man who started it. Designed by Instrument Shop Foreman Bruce Saunders, TCA Winnipeg.

Chicago & Southern Cylinder Honer

• With stations for a full set of Cyclone cylinders, the circular table of this fixture is mounted on Timken bearings, rotates cylinders successively into position under honer, is locked in place by indexing pin. Hone is by Sunnen Products Co., is driven by Black & Decker drill 3/4 in. Weight and cable counterweight balances the drill for easy vertical movement.





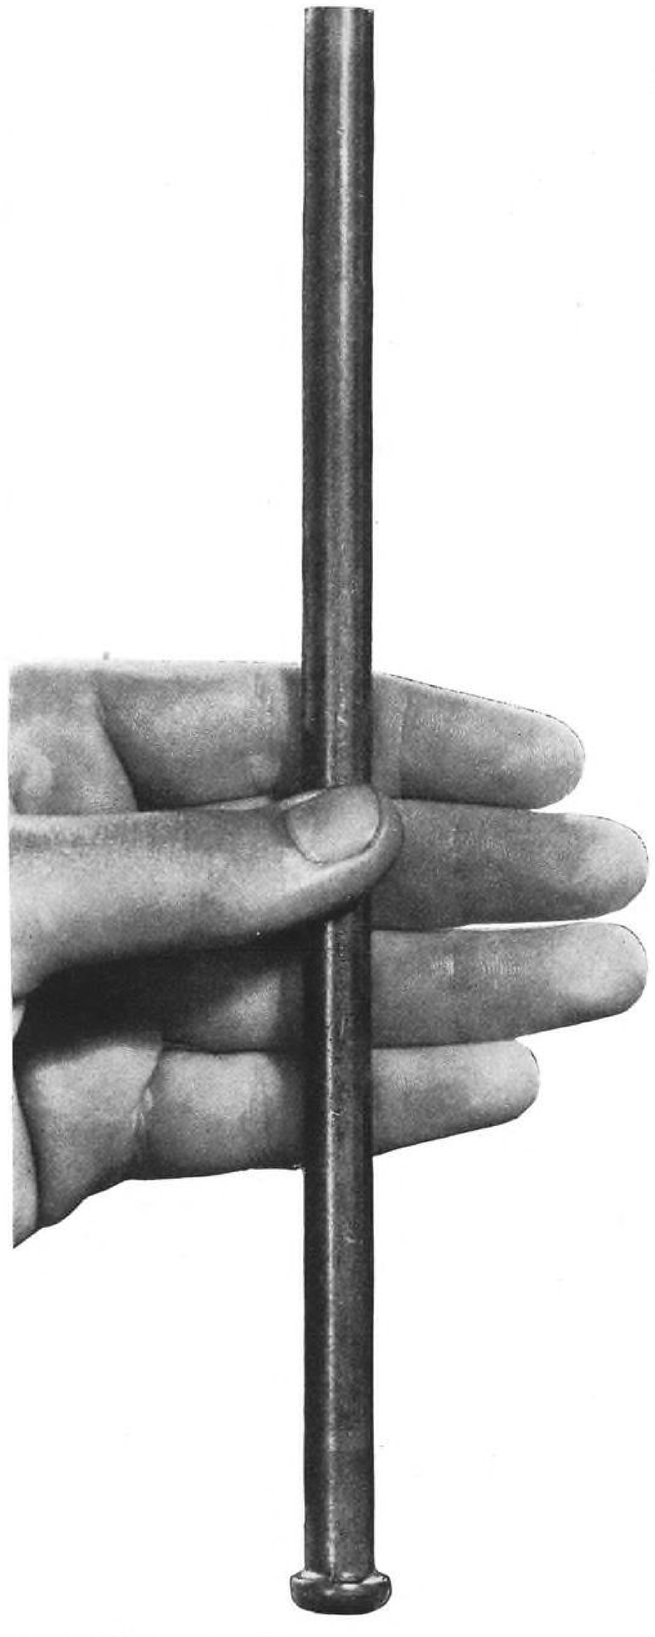

remember The Horse-Shoe Nail?

"All for the want of a horse-shoe nail . . ."

So goes the old story of battles and empire lost for want of a small but important thing. In today's battles—with history's course depending upon whether a machine functions—mites do make might.

An important part of a famous British gun carrier is the pin which holds track sections together. This modern "horse-shoe nail" must stand up under punishment if the weapon is to serve. Nearly two years ago the engineers of Victor-Peninsular Division of Allied Products Corporation began experiments to cold-head this important part. It posed a tough problem: Nearly 10″ long, the case-hardened pin had to be kept perfectly straight through all operations.


Allied's experience and specialized equipment solved the problems. Now millions of these pins bearing the stamp of Victor-Peninsular are in service on the toughest fronts—best of all, the Allied-made pins *raised the life of the part more than 10 times!*

ALLIED PRODUCTS CORPORATION

DETROIT AND HILLSDALE, MICHIGAN

"IT'S AN ALLIED PRODUCT!"

Parts produced in the four plants of Allied Products Corporation—precision machine parts for aircraft, punches and dies, plastic molds, cap screw and cold-headed parts—are proving the benefit of Allied's skill, experience and facilities.

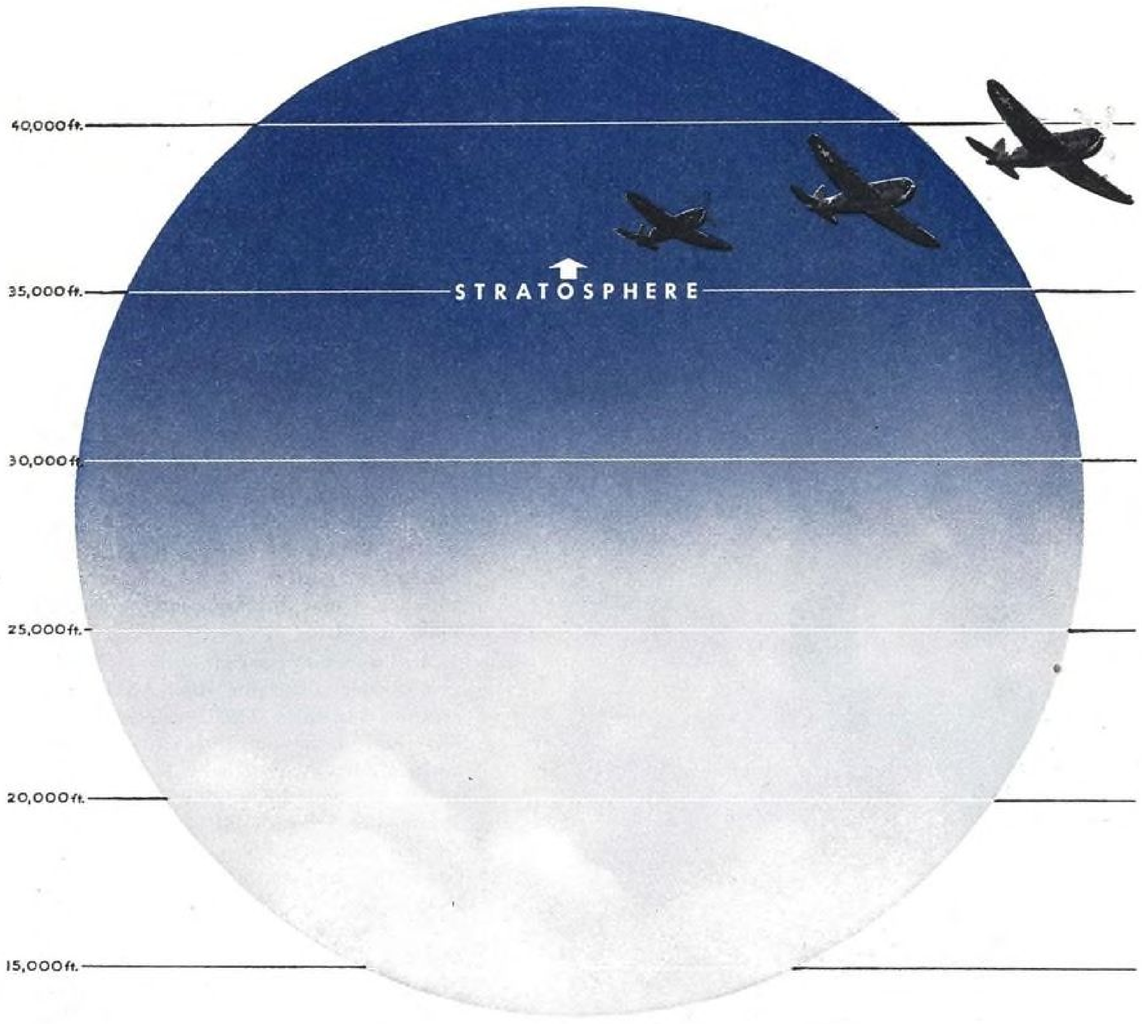

"THUNDERBOLT-WORLD"

The "Thunderbolt" was conceived for one purpose... to fight in the Stratosphere.

There, over seven miles straight up where few other aircraft go, is the "Thunderbolt-World." Ordinary planes that perform brilliantly at lower altitudes, lose their speed and maneuverability as they approach the Stratosphere.

Up between thirty and forty thousand feet, the Thunderbolt flies at more than 400 miles an hour... spits sudden death from eight 50 calibre machine guns in its wings. It is a deadly weapon... guardian of our high-flying bombers.

Only by experience and scientific research in the Stratosphere and its effect on motors, parts, materials and man himself could such a plane have been engineered. Republic designers and Army Air Forces experts have a rare understanding of Strato-mechanics.

After the war, this knowledge will be used to speed up communication between nations... to bring the peoples of the earth closer together.



REPUBLIC P-47 THUNDERBOLT


REPUBLIC Aviation
FARMINGDALE DIVISION
SPECIALISTS IN HIGH-SPEED AIRCRAFT

Canada Trains Them By Tens of Thousands

By JANET R. KEITH

MILITARY

Billion dollar program operates 154 schools—many double the normal size. And already these schools have sent more than 130,000 air and groundcrew graduates to battle.

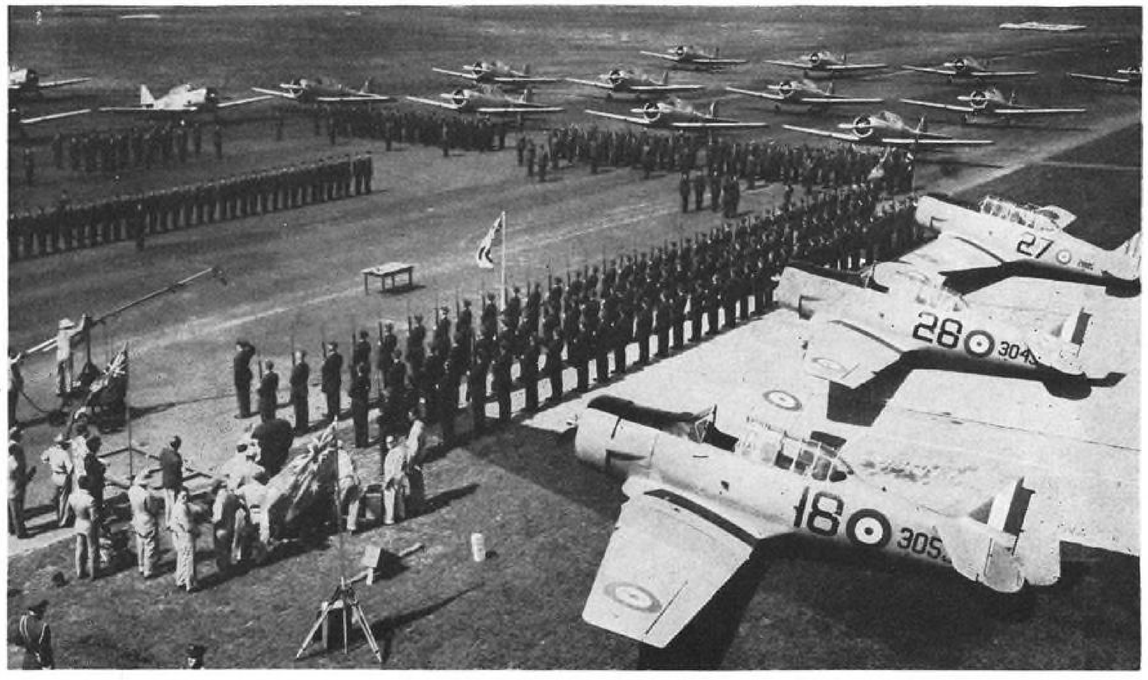

Under rapidly accelerated and expanded Combined Training Organization which supplies airmen for the United Kingdom, Canada sends thousands of highly trained men overseas each month. Here class lines up for wings presentation. (RCAF photo.)

CANADA HAS BEEN CALLED the fledgling nest of British flyers, an airdrome of democracy, and a training field of United Nations. To a marked degree she deserves all those titles.

Under the urgency of war she has advanced her flying training from a handful of civilian clubs in 1939 to a country-wide network of schools and flying stations. Her aviation organization takes in the youth of many countries and turns out thousands of highly trained airmen every month. It cost better than $1,000,000,000 to bring it to its recently reached full fruition; it is costing close to $500,000,000 a year to operate.


It has in operation today 154 training schools, many of double normal size. To date 130,000 graduates of the training organization have proceeded from its establishments to duties in the British aerial war machine. Of these, 50,000 were airerew and 80,000 grounderew. Included in that number are Englishmen, Australians, New Zealanders, Newfoundlanders, Norwegians, Poles, Czechs, Belgians, Americans, and Canadians.

Canada's Combined Training Organization, or CTO., had its beginning in Oct., 1939. Great Britain, Australia, New Zealand, and Canada decided to pool portions of their aviation funds to create an air training system for British Empire grounderew and flyers. As a location for the scheme, Canada had special values. She had great open areas of sparse population; her war record in the last conflict proved her sons eminently suited to aviation; her nearness to the huge production of the United States promised supplies; and mainly, her removal by 3,000 mi. from the bases of enemy bombers gave safety.

In the leisurely vein of the war of nerves in 1939 and early 1940, the four participating countries readily adopted a program that would bring the training system to maturity in two and a quarter years. They judged that the training of personnel and the hacking of airfields out of fields and forests would take that long.

But Hitler's power-play advance through France blew their schedule wide open. As invasion of the British Isles seemed imminent, Canada offered to send over her flyers then in training to become instructors. Britain said no. She stated that despite the crisis she would prefer them to come in thousands later rather than in tens then. But she asked for acceleration.

Thus, from the summer of 1940 on,

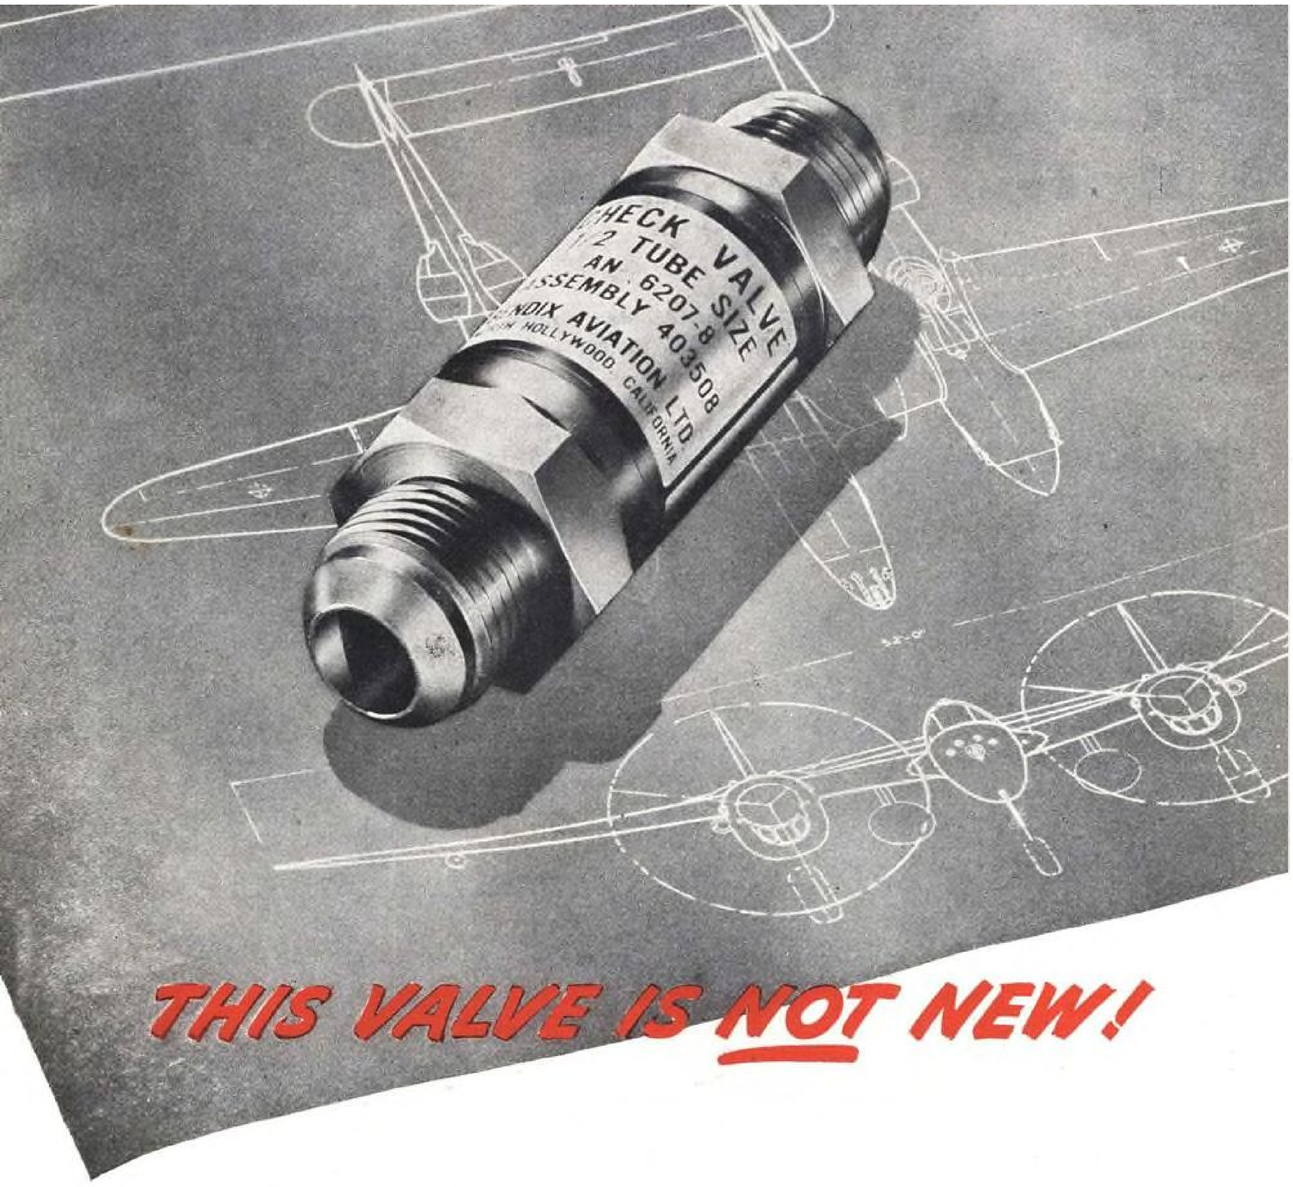

THIS VALVE IS NOT NEW!

It's four years old. Back in 1939, Bendix engineers began experimenting with plastic poppets* for hydraulic check valves . . . a bold step when dural poppets and hardened steel seats were universally used. After many months of development, of proving and re-proving, of half-million cycle life-tests on a single valve . . . Bendix check valves were offered to the aviation industry and accepted. 1943 finds Bendix plastic poppet check valves on every fighting front . . . in service on more than 20 military airplanes including the P-38, the B-17, the B-24, and the A-20. They are approved as AN-6207-4-6-8-10 & 12 and by the Society of Aeronautical Weight Engineers. The leadership which they have attained today has proved the soundness of Bendix engineering. Complete engineering data on Bendix check valves will be sent on request to airframe engineering personnel. *Bendix Aviation Ltd., North Hollywood, California. Sales Engineering Offices in St. Louis, Dayton & New York.*

*An exclusive Bendix Aviation, Ltd., development, U. S. Patents Pending.

Bendix Aviation, Ltd.
NORTH HOLLYWOOD, CALIF.
Subsidiary Bendix Aviation Corp.

Bendix DESIGNERS AND MANUFACTURERS OF RADIO AND HYDRAULIC EQUIPMENT — OUR PART OF THE INVISIBLE CREW

acceleration became the keynote. Construction companies, contractors, builders, aircraft producers, executives—all were inspired to hard work by the fall of France and the Battle of Britain. All could see that upon air power rested the fate of the cause. They put forth a truly all-out effort, and as a result the organization reached the status originally planned by mid-1941—a good year ahead of time.

It has continued to expand and, very recently, it reached what is said to be its ultimate size.

How the CTO. has been financed, how it has developed, and what form its future progress will take were discussed recently in the Canadian House of Parliament by Hon. C. G. Power, minister of the air division of the national defense department.

Discussing costs, Mr Power's statements can be summarized as follows:

CTO. expenditures are running currently at about $10,000,000 monthly. On this basis—with no allowance for further expansion—cash requirements for 1943-44 would be approximately $480,000,000. The amount of cash requirement for 1943-44 is stated as $445,335,845, it being considered that Canada will stand to benefit by United Kingdom contributions to a somewhat greater extent than heretofore because of greater deliveries of aircraft and supplies for British account being expected in 1943-44 from the United States and Great Britain. Also, capital expenditures are expected to decline in 1943-44.


There is a great difference between the original financing plan and that now in effect. Changes resulted from the air training conference in Ottawa (June, 1942) at which the U. S. government and Air Forces were represented.

Main points of the original agreement signed in 1939 were these: (1) Canada paid for the recruiting, manning and all RCAF aircrew training up to the stage of advanced training, these same costs being borne by New Zealand and Australia in respect to the aircrews of those dominions, which subsequent to such training were sent to Canada for advanced training; (2) United Kingdom supplied all twin-engine aircraft, except *Anson* wings, a certain number of single-engine aircraft, and half the engines for

(*Turn to page* 278)



Canada's chain of air schools spans continent, with many units enlarged to twice normal size. Typical of such units is that above, with North American *Harvard* circling field.

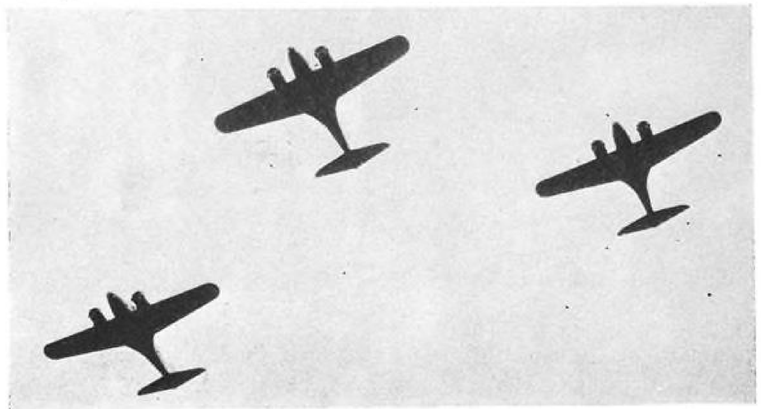

Quality is stressed by CTO even more than quantity. These Avro *Ansons*—team-mates of Cessna *Cranes*—give both navigators and pilots coordinated training in cross country flights. (RCAF photo.)



Pictured are key men who, with other United Nations representatives, formulated future flight training program at Ottawa conference. Left to right: Maj. Gen. Barton K. Yount, Commanding General, AAF Training Command; Rt. Hon. H. H. Balfour, British Parliamentary Under Secretary of State for Air; Maj. Gen. T. H. Shen, Commander of Chinese Air Forces in the U. S.; and Maj. Gen. L. H. van Oyen, Royal Netherlands Indian Army.



Official Navy Photograph

... But the Consolidated PBY Patrol Bomber turns up a frosty nose at the wind-swept wastes and fog-bound seas of the Aleutians! Smarty-pants pursuit pilots might think her slow. But many a sea-venturing Nip or Nazi has found her an on-coming arrow followed by a shattering explosion, and then . . . a lean, red individual with horns hands him a shovel.

Despite PBY's duckish appearance alight, in the air her powerful streamlined length delights the eye . . . nine tons of amphibious warship, well-festooned with bombs, built to serve at Pole or Equator ... the "work-horse" of the Navy! Maneuverable? Read in today's papers about sub-straddling bombs, oil-slicks, or enemy transports blasted!


Chalk up these fine points of maneuverability to Fafnir Ball Bearings on the controls. Translate them into years of collaboration between Fafnir engineers and the nation's aircraft designers. There you have a picture of the precise, responsive, all-climate performance of Fafnirs . . . and an inkling of service Fafnir Ball Bearings can render in coming days of peace. The Fafnir Bearing Company, Aircraft Division, New Britain, Connecticut.

Send for copies Fafnir Aircraft Service Manual, you will find it an invaluable service guide.



Piloting Big Bombers Is Big Business

MILITARY

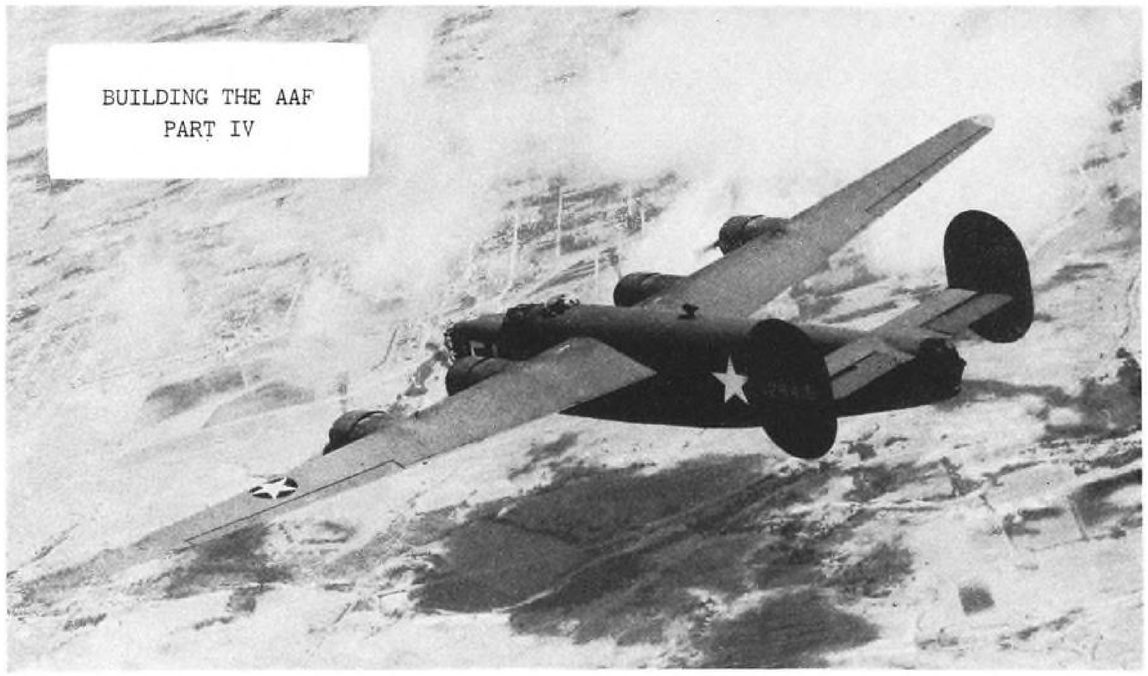

From Training Command's Tarrant Field, future *Liberator* flyers head out over Texas to get the feel of four engines hurtling some 20 tons of plane. Banks, turns, glides and safe maneuvering on two engines are part of the piloting curriculum.

Nine weeks in cockpits, classes, and mechanic's overalls won't make a four-engine pilot. A man also has to have the executive's skill for management plus "the ability to think of 50 things at once."

DOWN IN TEXAS in a lakeside setting a stone's throw from one of the world's greatest plane plants, the Army Air Forces Training Command is bringing out the "big business" instinct in pilots who would fly the Consolidated Vultee four-engine B-24 *Liberator* bomber.

The job here at Tarrant Field, as at other AAF four-engine transition schools in the nation, is to create combat crew leaders with responsibility over the lives and efficiency of ten men and a $250,000 "flying battleship."

In a nine-weeks' course that sends the student officer into both the classroom and the air on a round-the-clock schedule, the "lone eagle" pilot becomes a flying executive whose staff is the crewmen and whose office is the fuselage of one of the world's most potent airplanes.

The bomber pilot is the "finger" and the "brain" of a closely-knit unit and must always be conscious of his relationship to a group of comrades whose destinies—successes or failures—are inseparably interdependent.

When the student—who may be anything from a second lieutenant to a lieutenant colonel—realizes his enormous responsibilities, the transition school's task is more than half done.


The B-24 pilot learns to lift his huge craft into the skies with efficiency—not dash. Besides being pilot he is also engineer, mechanic, coordinator of several score pre-takeoff checks and tests, safety expert, leader, and general manager.

Typical of the veteran flyers who direct Tarrant's stiff training routine is Maj. Albert L. Haley, 25-yr.-old squadron commander who won his wings at Kelly Field. "Not every pilot can handle the *Liberator*," he says, "for obviously not every man can think of 50 things at once—and still fly an airplane. There are countless flyers, top-notch in single-engine planes, who are prevented by disposition or temperament from taking charge of the B-24."

Before the big plane's captain ever taxis off the ramp, he is required to make, or oversee, 40 individual checks. With the assistance of his co-pilot and his enlisted engineer, he inspects the crew, engines, fuel, gas tank caps, brakes, wheel chocks, wing flaps, bomb bay doors, and the readings of a complexity of instruments that would do justice to the control center of a heavy cruiser. After the engines are started, 9 checks are made before taxiing; 8 more after the *Liberator* is headed for the taxi-strip; 15 before the actual takeoff; 2 more when the plane is in the air; and 5 when it reaches cruising altitude. Before landing, 19 checks are made. There are 6 more immediately after landing, plus a final 13 later to secure the ship on completion of its

for Both
PRODUCTION and MAINTENANCE

Black & Decker Scrugun Steps Up Fuel Pump Assemblies 5 to 1

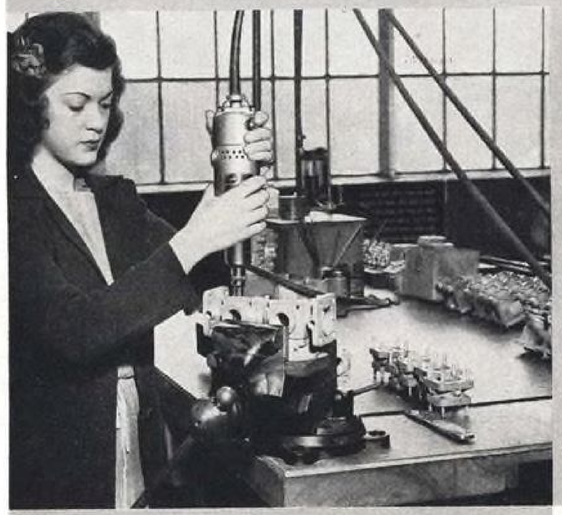

"We use a Black & Decker Scrugun for the precision job of assembling body and housing of airplane fuel pumps," reports a large pump manufacturer. "We find the Scrugun speeds production 5 to 1 over hand tools. The sensitive clutch provides a more uniform torque for uniform assembly pressure—and women can use these Scruguns on jobs impossible for them to do with hand screw drivers."

Black & Decker Drills Vital for Airplane Engine Maintenance



Whether the job calls for honing airplane engine cylinder walls (right) or for dressing engine valve seats (left), this leading airline's service shop crew would be lost without the help of Black & Decker Maintenance Tools. Black & Decker Electric Drills, Valve Seat Grinders and Valve Refacers are "musts" in military and commercial air bases and maintenance shops everywhere.



The Aircraft Industry Depends on Black & Decker Tools "PLUS" Service

These two cases are typical of the hundreds of airplane production and maintenance jobs Black & Decker Portable Electric Tools help do *faster and better*. Men who build and maintain aircraft depend on them in the production of parts, assemblies, sub-assemblies, engines, armament . . . and for all sorts of airplane maintenance jobs. They depend on Black & Decker "plus" services, too—coast-to-coast Factory Branches for quick, expert tool repairs and replacements . . . convenient interchangeability of parts . . . close-at-hand Distributors for help on today's production problems and tomorrow's retooling programs. It will pay you to keep posted on Black & Decker in your postwar planning. The Black & Decker Mfg. Co., 738 Penna. Ave., Towson-4, Md.

A Factory Branch Near You

Atlanta, Ga.; Baltimore, Md.; Boston, Mass.; Buffalo, N. Y.; Chicago, Ill.; Cleveland, Ohio; Dallas, Texas; Denver, Colo.; Detroit, Mich.; Indianapolis, Ind.; Kansas City, Mo.; Los Angeles, Calif.; Memphis, Tenn.; Minneapolis, Minn.; Newark, N. J.; New Orleans, La.; New York, N. Y.; Oakland, Calif.; Philadelphia, Pa.; Pittsburgh, Pa.; San Francisco, Calif.; Seattle, Wash.; St. Louis, Mo.; Towson, Md.; Toronto, Ont.; Montreal, Que.

LEADING DISTRIBUTORS EVERYWHERE SELL

Black & Decker

PORTABLE ELECTRIC TOOLS

flight. The passenger is left with a definite conviction that the four-engine pilot is no carefree birdman but a methodical and highly skilled technician.

To make him such there is great emphasis on ground school subjects. The student officer must thoroughly learn the inner workings of his plane preparatory to assuming broad obligations in the attainment and maintenance of perfect mechanical performance. The smooth synchronization of power available from the B-24 is dependent to a large degree on the pilot's understanding of the problems involved in its structures and engines, with considerations of the feelings and skills of his crew. Because it is his task to supervise the work of his men, the pilot must have a precise understanding of their respective duties. To learn the problems which confront his ground crew, he makes practice repairs with his own hands. If damage occurs because of his error, the guilty pilot is required to do much of the repair work himself.


In ground school he also studies wing and tail assemblies, superchargers, brakes, retractable gear apparatus, airframes, engines, and propellers. He first meets the eye-filling instrument panel in class, where a complete replica has been installed.

Further, he is required to freshen-up his technique in code and visual message sending and receiving, while renewing his ability to identify scores of naval vessels and aircraft types. The prineiples of avigation, learned by the student as cadet before he won his wings, are reviewed, and the *Liberator* learner is made aware of the important role the pilot plays in maintaining constant speed and heading for the benefit of the navigator.


Aetual B-24 transition flying is begun, of course, during the daytime when the student officer gets his first introduction to the inside of the *Liberator's* cabin. Then come taxi trials, takeoffs, banks, turns, glides, climbs, spirals, stalls, and landings. Before his record sheet is finally signed by his squadron commander, the *Liberator's* future manager masters a number of emergency procedures and learns to fly his plane safely on three engines, also on two. And before leaving for the Operational Training Unit—his last stop before combat—he flies at night on instruments only, in battle formation, and at altitudes well above 30,000 ft. with oxygen equipment. The final examination is a long cross-country hop.

His training completed, the four-engine pilot represents the world's finest "eager beaver" of the airways.

In the words of Training Director Major Haley, "He's more than a pilot. In our AAF he stands for everything human that it takes to tear out the heart of an Axis city."

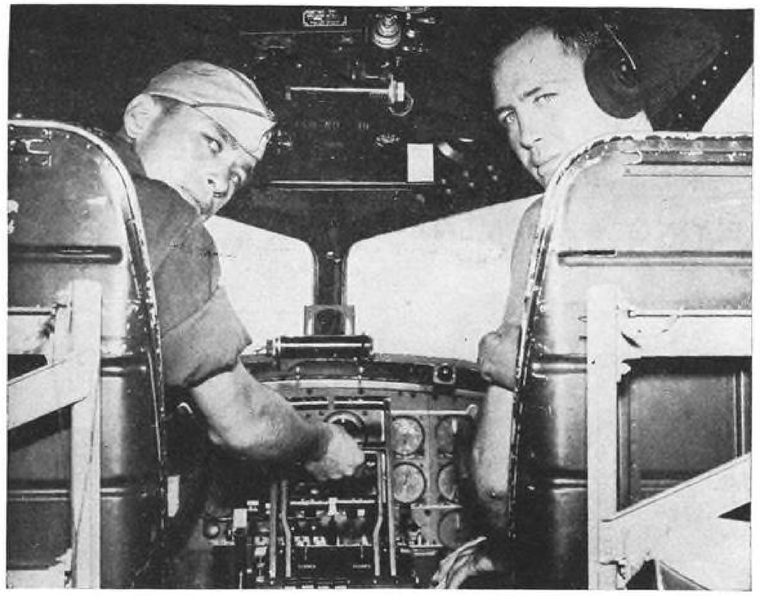

From "contact" to checkout, the pilot and his mate must make 77 inspections of instruments and apparatus.

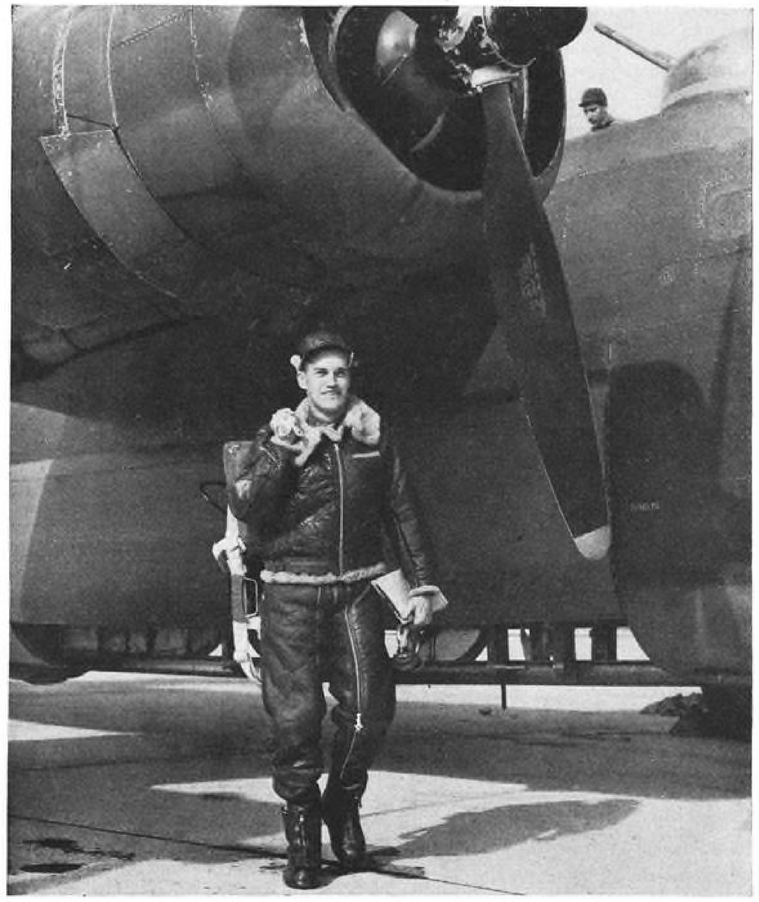


A "big business man of the air," the *Liberator* pilot is chief executive over a $250,000 plant and ten men who collectively pack a four-ton punch.


FLYING EQUIPMENT


"Old Lady In a New Dress"

Avro "Anson V," re-designed to meet Canadian conditions, completes evolution from prewar light bomber to avigation trainer for RCAF and RAF.

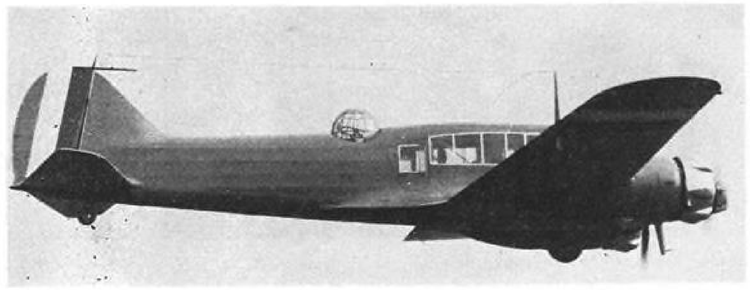

Evolution of a trainer. An early Avro *Anson* (above) when the type was classed as a combat craft, and (below) today's re-designed version on duty in Canada as an avigation trainer. Glass-enclosed tubular structure has given way to molded plywood fuselage much better adapted to Canadian winters. Gun turret has been replaced by less bulky astro dome, and Pratt & Whitney engines have been substituted for difficult-to-obtain *Cheetah* engines.

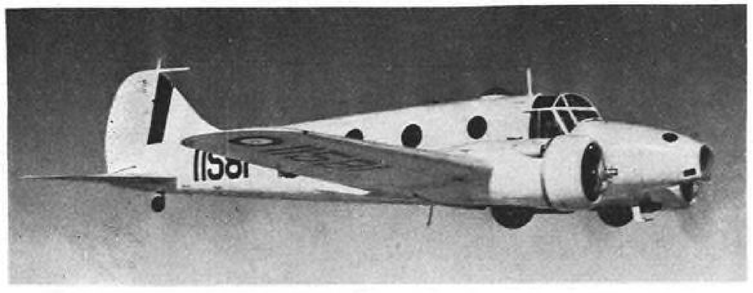

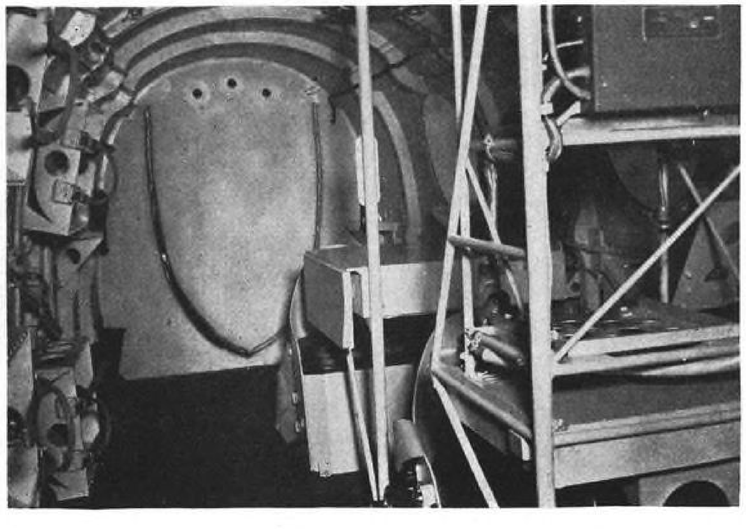

NOW GOING INTO PRODUCTION at Federal Aireraft in Canada is the Avro *Anson V*, newly accepted twin-engine avigation trainer which was developed from the *Anson II* that had been used as a transition trainer by the Royal Canadian Air Force.

Principal changes are in the fuselage and in substitution of 300 hp. Pratt & Whitney *Wasp Junior* engines for the now difficult-to-obtain British-built *Cheetahs*. Mid-section of the fuselage is of plastic bonded plywood of improved streamlined shape in place of the former tubular glass-enclosed structure. In addition to improved performance, the use of plywood is expected to facilitate production as well as to make material savings in strategic materials.

These changes have been brought about by dual factors: A change in the *Anson's* function and the need to conserve both materials and man-hours. Prime duty of the *Anson II* was dual flight training with crews of two or three on local flights; today's version is used almost exclusively as an avigation trainer, carrying a crew of four or five on three to four-hour flights.

Comparative specifications and performance data follow;

	Anson V	Anson II
High speed	200 mph.	180 mph.
Cruising speed	120-165 mph	120-140 mph.
Landing speed	66 mph	63 mph.
Stalling (without flaps)	73 mph.	70 mph
Rate of climb (sea level)	1,600 ft./min.	1,000 ft. min
Gross weight	8,500 lb.	7,650 lb.

★ ★ ★

Re-designed as flying classroom rather than fighting craft, new Avro *Anson V*, Canadian version of British light bomber of prewar days, carries crew of four to five on three to four hour avigation training flights. In right foreground is seen radio operator's installation, behind which is avigator's desk with drop-leaf table. Folding seats for avigator students are at left.

Spadework for Victory

Behind today's spectacular military success is a story of vision and daring that goes back to 1941 . . . to the first high-silica bauxite dug from Arkansas mines for Reynolds plants. For that shovelful of bright earth foretold a great new source of aluminum for America . . . a *domestic* source, immune to the threat of U-boats, unrestricted in quantity, demanding only the right kind of plant facilities to supply the largest and strongest air fleets ever dreamed of.

Reynolds built that kind of plant. Completed in the world-record time of five months and twenty-nine days, it is still the only plant in the country where bauxite comes in at one end and aluminum sheet rolls out the other. What is more, that plant was deliberately planned to process bauxite from good old American soil. This, long before Pearl Harbor . . . may aptly be called "Spadework for Victory."

But Reynolds does not rest upon past laurels. Reynolds takes the lead in prefabricating airplane parts at the aluminum source. Reynolds metallurgists look ahead for new aluminum alloys that will give even greater striking power to Allied airmadas. And Reynolds original skill, as the world's largest roller of aluminum foil, promises still further triumphs in the light-metal age of tomorrow.

The march is on . . . toward *Leadership in Aluminum*.




Actual color photograph of domestic bauxite ore from Reynolds' own mines.

REYNOLDS ALUMINUM

OUT OF THE GROUND INTO THE SKY

REYNOLDS METALS COMPANY • GENERAL OFFICES • RICHMOND, VA. • 38 PLANTS IN 13 STATES

AMERICA'S NEW SOURCE OF ALUMINUM

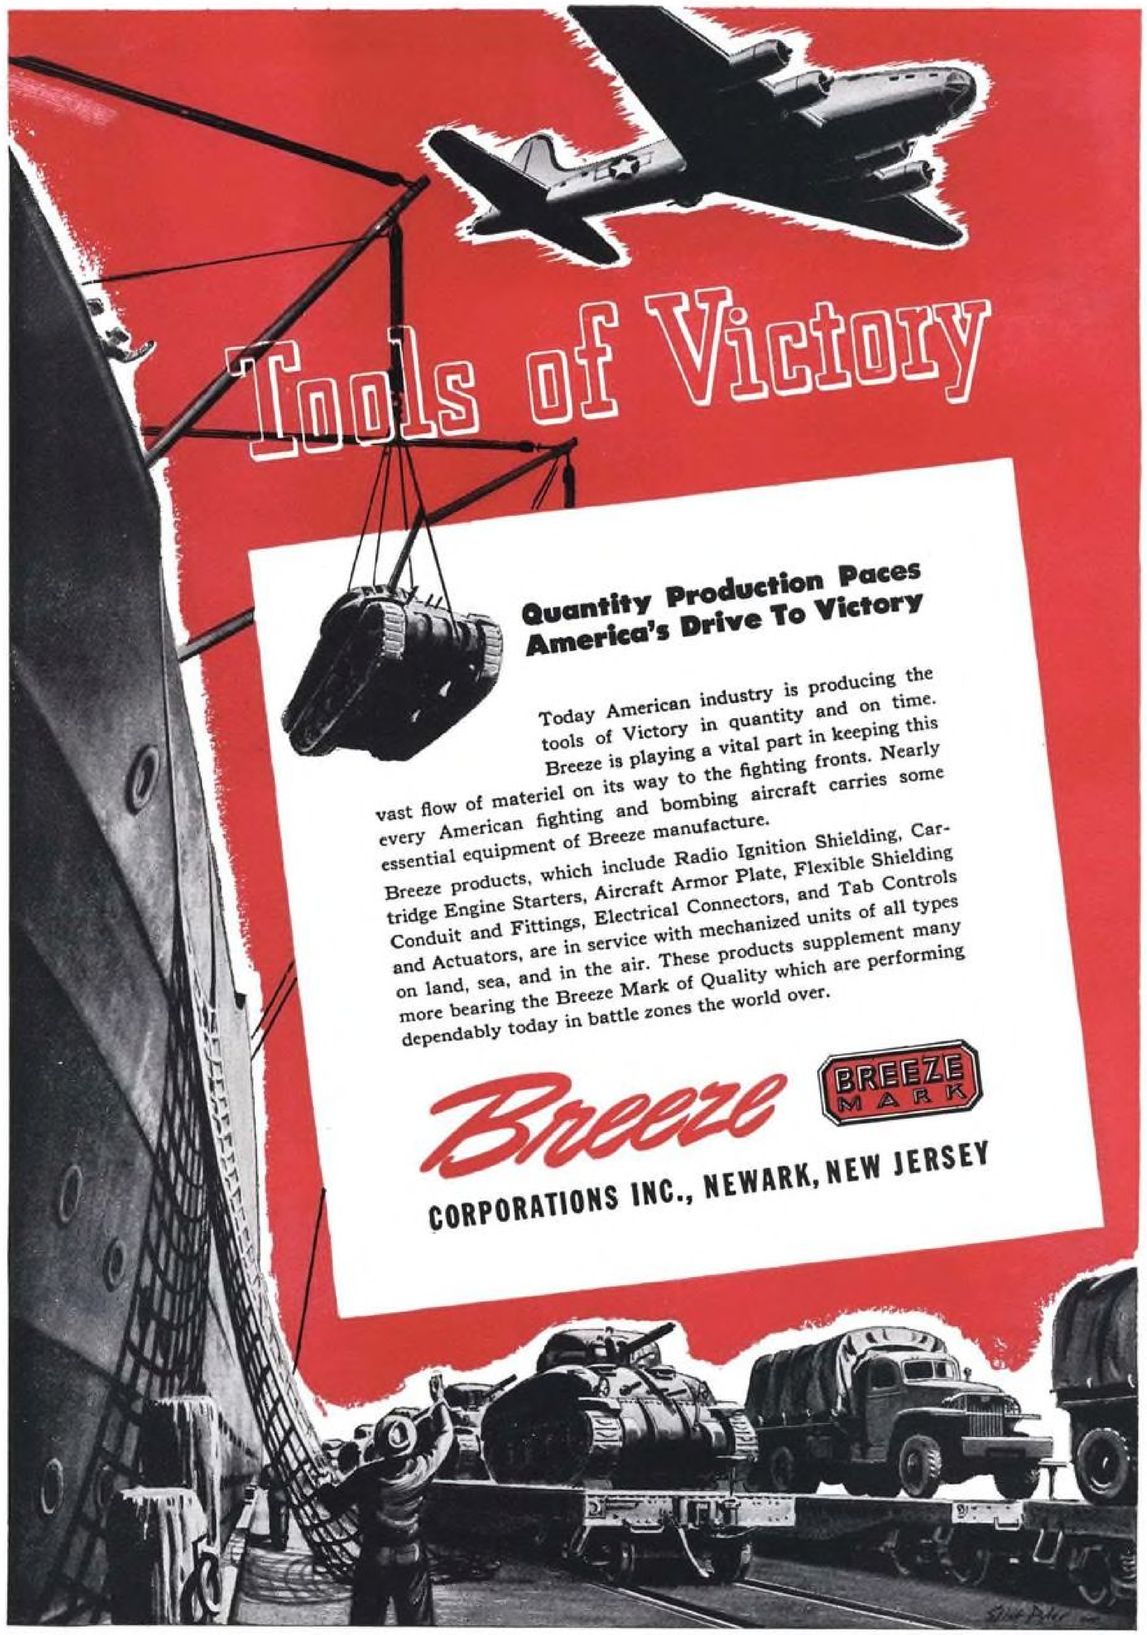

PV-2 Helicopter Makes First Public Flight

New craft said to be free of vibration and flutter characteristics through full operation range, including cruising speed of 65 mph. and top of 90-100 mph.

FIRST PUBLIC DEMONSTRATION of the PV-2 helicopter, designed and built by P-V Engineering Forum, Inc., of Philadelphia, Pa., was given last month at Washington National Airport by Frank Piasecki, Forum president. While more than 25 helicopter projects are known to be under way throughout the country, this craft was the second American-built helicopter flown publicly.

A single place craft, powered by a 90 hp. four cylinder Franklin aircooled engine, the PV-2 has a three-blade rotor of 25 ft. diameter. Rotor blades are combination wood and metal construction; the spar being of tubular steel, ribs, leading and trailing edges of wood, all fabric-covered. Chord of the rotor blades is constant at 9½ in. except the tips and approximately 1½ ft. just outside the fairing which covers the rotor control. Spar is 1⅛ in. in diameter at the root, tapering to 1 in. at the tip.

Normal horizontal cruising speed of the craft is approximately 65 mph., with the rotor blades turning at some 350 rpm. for this speed. Range is given at 2 hr. Top speed of the craft is estimated by the designers at from 90 to 100 mph.

Rotor blade pitch variation moves over an arc of approximately 8 deg. for fore and aft control and 4 deg. for lateral control.

Anti-torque, or rudder prop, which is mounted on the right side of the fuselage tail, is of two-blade construction, with a 5-ft. diameter. Geared to maintain a constant speed relationship to the main rotor, it turns between 1,600 and 1,700 rpm. at cruising speed. Directional control is imparted through conventional rudder pedals which change pitch of the anti-torque blades.

The control "stick" for fore and aft and lateral control is suspended from the roof of the cabin with conventional rudders acting on a two-blade anti-torque rotor of 5 ft. diameter to give lateral control.

The PV-2 helicopter differs from others in that pitch control can be set and the craft flown with the thottle. For takeoff, the pitch control is set in forward position and the throttle opened until the craft ascends vertically. To change from vertical to forward motion, the stick is pushed forward, then eased back to about neutral as the craft gains speed. The throttle can then be eased back to maintain cruising speed.

While no details on the rotor controls were divulged, Elliott Daland, chief engineer, reported they are of simpler construction and contain fewer working parts than other drives. The entire unit is housed in what its designers call the "discus", a fabric-covered faired unit some 3 ft. in diameter.

The engine is mounted on end in the lower part of the fuselage immediately behind the pilot with a drive shaft going straight up to the rotor control through a universal joint installed to absorb vibration.

Fuselage is of conventional welded tube construction, faired up over the rotor mount to the rotor hub. The craft is fitted with wheel and tail skid landing gear, the tread on this experimental model being slightly wider than that of any automobile.

Mr. Daland reported that the PV-2 is free of vibration or flutter periods such as those encountered in automobiles when picking up speed in second gear —in changing from vertical to horizontal speed, or when the craft is picking up speed horizontally.


Both Messrs. Piasecki and Daland pointed out that the PV-2 is strictly an experimental craft—which has some 15 hr. flying time—and that no claims are made that it is the answer for the "man in the street." A larger model, said to have a payload of more than a ton and a range of some 400 mi. has already been designed.



Frank Piasecki, president of P-V Engineering Forum, Inc., at controls of PV-2 helicopter, as it hovers over American and foreign military pilots and newsmen during craft's first public demonstration flight at Washington National Airport. PV-2 designers report its top speed at 90–100 mph. and cruising speed at 65 mph. when 25-ft. diameter rotor blades turn at 350 mph. Anti-torque, or rudder rotor blades of 5 ft. diameter turn up approximately 1,600 rpm. at cruising speed.

Performance & Specification Data

High Speed	90–100 mph.
Cruising Speed	65 mph.
Gross Weight	1,000 lb.
Rotor blade diameter	25 ft.
Rotor Blade Chord	9½ in.
Rotor Blade Speed (cruising)	350 rpm.
Anti-torque rotor diameter	5 ft.
Anti-torque rotor speed (cruising)	1,600 rpm.
Power plant	90 hp., 4-cylinder, aircooled Franklin

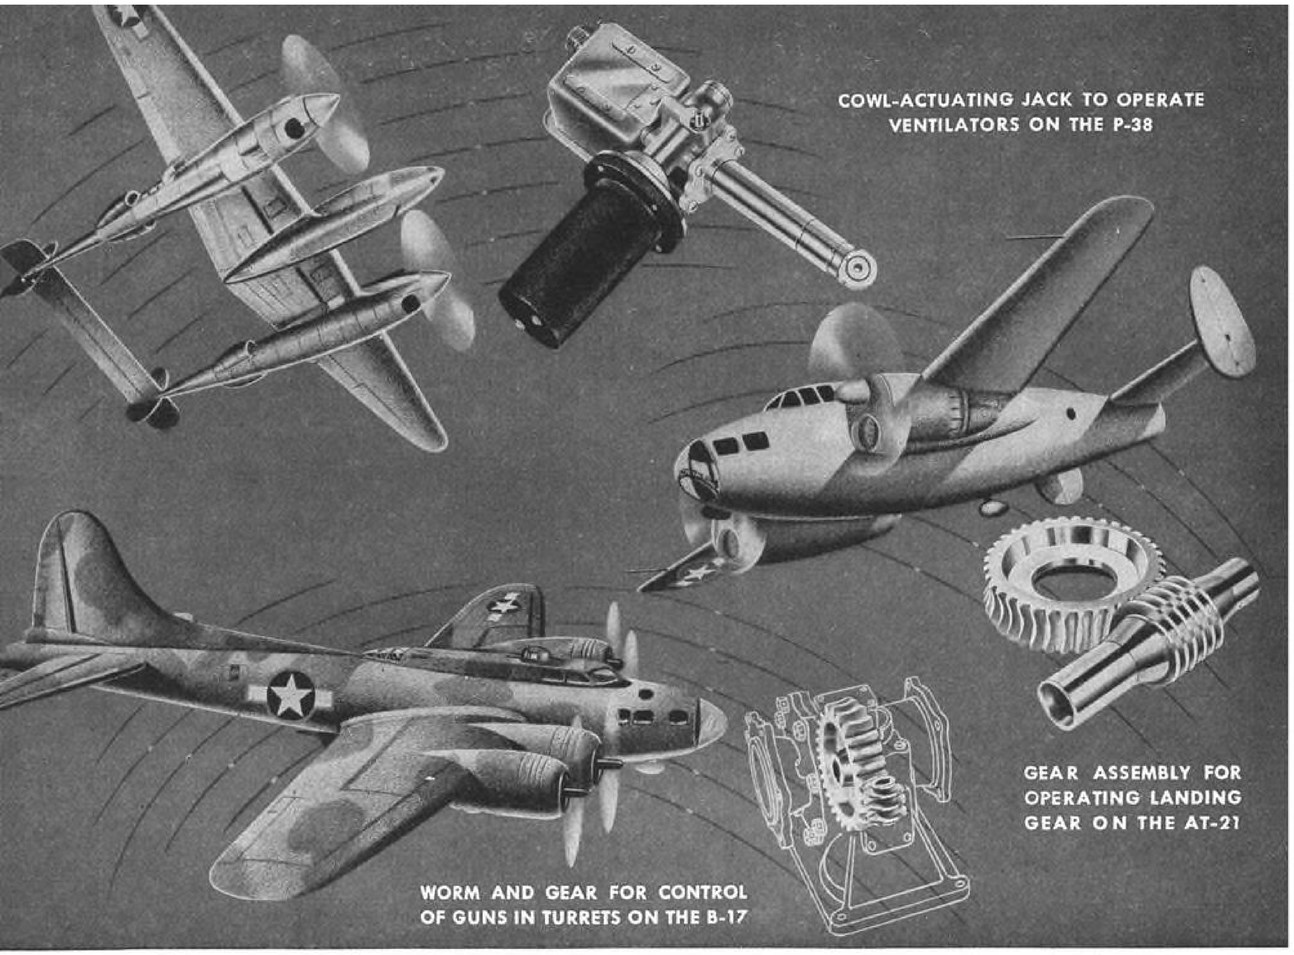

Production of Precision Aircraft Devices

SOLVING intricate production problems called for in the manufacture of high-precision aircraft devices is another contribution Foote Bros. Gear and Machine Corporation is making toward speeding the day of Victory.


Precision gears for reducers for azimuth and elevation control of guns in turrets in the B-17 bombers—gear assemblies to raise and lower the landing gear of the AT-21 trainers—cowl actuating jacks to operate ventilators on oil coolers on P-38 interceptors—all these devices call for light weight coupled with extreme precision.

Foote Bros. engineering experience and manufacturing "know-how" acquired in the production of precision gears in tremendous quantities for Pratt & Whitney aircraft engines assure the production of these special devices in the quantities required to meet the ever-increasing demand of our global air force.

It is natural that many manufacturers of airplanes, airplane engines and airplane parts recognize in Foote Bros. a logical source for gears and devices where light weight and extreme precision are essential.

After the war, the experience gained in the manufacture of such gears and devices promises American manufacturers a new era in the economical transmission of power.

FOOTE BROS. GEAR AND MACHINE CORPORATION
5225 South Western Boulevard • Chicago, Illinois

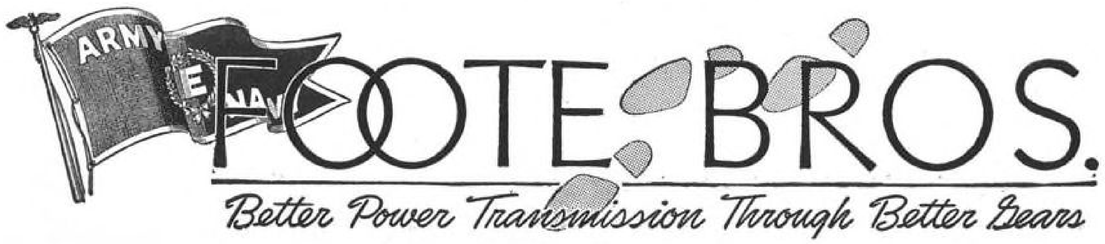

Better Power Transmission Through Better Gears

On Patrol

• Specifications on complements of officers for various-sized Civil Air Patrol units are being distributed in a revised procedure memorandum which also reduces staff titles to seven: Executive, staff, intelligence, medical, communications, supply, and adjutant. Commanders of large groups, squadrons, and flights who have shown exceptional merit may be promoted one grade higher Promotions may also be made for outstanding performance in smaller groups. "Appointments to functional posts as command and staff officers are on a temporary basis and terminate with relief from such assignments," National Headquarters announces. "However, a procedure is being developed to commission CAP officers for the duration on the basis of aeronautical skill, service, and completion of training courses. Temporary commissions for active duty assignments will be good for 30 days after relief from such duty in order to give time to fit these officers into wing units on return to their home squadrons."

• Recruiting drive for AAF cadets is now being directed at schools. Headquarters recommends that units make contacts with school principals and parent-teacher associations and hold meetings to explain enlistments to prospective candidates. Arkansas and Florida school systems are allowing students credit for completing CAP courses in meteorology, avigation, and maintenance.

• Method of artificial respiration, developed by Dr. L. K. Zimmer, Kansas Wing medical officer, involves strapping victim on a plank or other flat object and see-sawing him up and down. This motion results in pressure of the viscera moving diaphragm, producing, it is reported, 40 percent greater volume of air inhalation

• In Tennessee, the state has agreed to pay part of the expenses—including insurance, gas and oil, and depreciation—of field maneuvers.

Along the Apron

• Among tuition-free engineering and management courses sponsored by an appropriation of the U. S. Office of Education and being given by New York University are twelve covering aeronautics and air transport intended to prepare students for war work. Applications, which must be approved by the government, should be made to the university war training office.

• *Virgil et cetera exeunt:* Ancient history and fine arts have gone by the board at Berkshire School, Sheffield, Mass., to make time for flying and aeronautical ground courses in the regular curriculum. On the point of soloing are Headmaster Albert Keep and some 40 of his undergraduates.

• Flight instructors for contract schools are being trained in 23 additional units activated by the AAF new Eastern Flying Training Command. During an approximate year's course, students enrolled in the enlisted reserve will be given AAF basic and secondary training and instruction in cross country flying, Link trainer, pedagogy, and a final term at Randolph Field. Assignment to contract schools will follow.

CIVIL OPERATION AND TRAINING


• Trans-Canada Air Lines' largest personnel training class, recently graduated, contained 38 women in a total enrollment of 50 indoctrinated in radio and teletype operation and passenger and traffic duties.

• Piper *Cub* trainer is the subject in a new series of pre-flight training films prepared for educational organizations by Bray Pictures Corp., New York City. Pictures explain elements of aerodynamics and maneuvers. During first month of national distribution, 70,000 people are estimated to have seen the film, *The Construction of a Light Airplane*, made at Piper Lock Haven, Pa., plant by Pennsylvania State College.

• In postwar meteorology "it will doubtless become the practice to disseminate synoptic and prognostic charts from principal forecasting centers by facsimile or other electronic methods of reproduction," William A. M. Burden, special aviation assistant to the Secretary of Commerce, predicts.




CONTROL BY "FEEL"

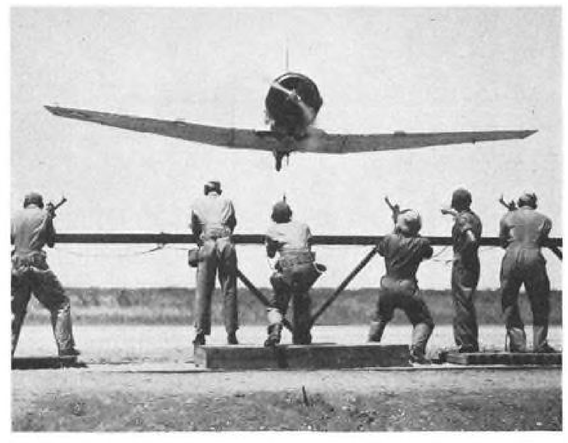

"BEAD PRACTICE"

Left: So bomber pilots can fly with their eyes continuously on their target, Randolph Field, Tex., school gives them blindfold tests in control operation. On command of his instructor, this student reaches for precise gadgets called for from among scores of instruments and controls studding cockpit. Right: At Harlingen Field, Tex., gunners-in-training take sights on approaching "enemy" just as they will do later on battle fronts—when their turret guns will be loaded with live ammo Here, "attacking" pilot radios his range to gunners, who note size of his plane at various distances and keep beads on it until it passes overhead. (International News photos.)

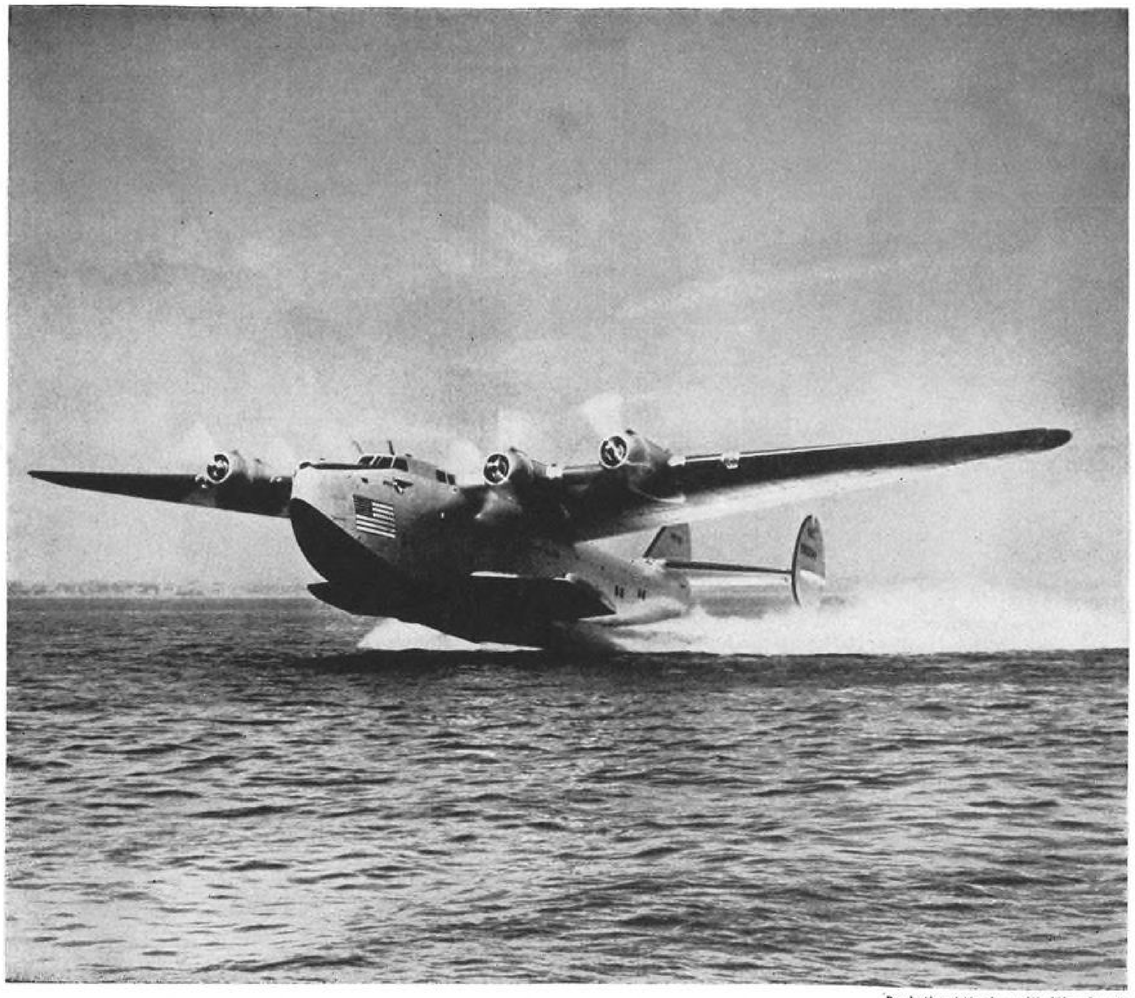

Back the Attack — with War Bonds

World's Ferry

Not long ago one of Pan American Airways' Boeing Clippers crossed the Atlantic *twice* in one 24-hour period.

Shortly before that, these same Clipper ships flew the Atlantic 12 times in 13 days and 15 hours.

President Roosevelt, on his historic flight to Casablanca, traveled both ways in Boeing Clippers. Winston Churchill, on his trips to America, crossed the ocean 6 times in Boeing-built planes of British Overseas Airways.

These are the high-lights. But perhaps the most remarkable thing about these Boeing flying boats, largest commercial planes in the world, is the way they have come to be taken for granted.

Crossing the Atlantic is no novelty to them; they have done it more than 1400 times! In fact, from the beginning of regular flight schedules between this country and Europe four years ago, the transatlantic service has been maintained almost entirely by airplanes designed and built by Boeing. These transoceanic Clippers have flown more than 7,000,000 miles, and have carried more than 44,000 passengers and 100,000,000 pieces of mail.

Today these huge ships, designed as peacetime luxury liners, are completing vital missions of war . . . shuttling across the oceans of the world with the monotonous regularity of *ferry boats!*

Behind their dependability of performance stand research, design, engineering and manufacturing skills of high degree, the same skills which have given America the Boeing Stratoliner,* the Boeing Flying Fortress,* and the Boeing Kaydet Primary Trainer.

Tomorrow as well as today you can look for integrity in any Boeing product . . . if it's "Built by Boeing" it's bound to be good.

DESIGNERS OF THE FLYING FORTRESS • THE STRATOLINER • PAN AMERICAN CLIPPERS **BOEING**

*THE TERMS "FLYING FORTRESS" AND "STRATOLINER" ARE REGISTERED BOEING TRADE-MARKS

INFORMATION TIPS

KEEP POSTED ON

Products & Practices

This selected information on new publications and products is offered by the "AVIATION" Reader's Service through cooperation with the manufacturers. It helps executives save invaluable time, provides profit through convenience. To obtain literature or additional data on new products described, simply fill in form below,* clip it to your letterhead, and mail. There is no cost, no obligation.

PRODUCTION

Abrasives 1

Production shortcuts in de-burring, finishing, and polishing are listed in catalog prepared by Weldon Roberts Rubber Co., Newark, N. J. Also given are tables of machine speeds for use of firm's rubber-cushioned abrasive products and wheels

Magnesium Welding.....2

James F. Lincoln Arc Welding Foundation, Cleveland, is distributing reprints of article, Arc Welding of Magnesium Aircraft Structures, which gives engineering account of helium atmosphere process.

Quenching Oil 3

Charts showing comparative efficiency of its "Super-Quench" are contained in booklet on its new quenching oil prepared by Gulf Oil Corp., Pittsburgh.

Gear Cutting 4

Chuckgrams, facsimile telegrams released by Garrison Machine Works, Dayton, Ohio, tell of spur and bevel chucks suitable for various types of gear grinding operations.

Polishing 5

For instruction of inexperienced operators, J. H. Rhodes Co., Chicago, has prepared handbook on setting up polishing wheels, also care and maintenance of felt bobs and wheels.

Coolant Cooler 6

Frostrode Products, Detroit, announces illustrated technical bulletin No. 75-AC describing cooler for maintaining desired temperatures of coolants and lubricants used in grinding, turning, cutting, and other machine processing work.

Weld Testing 7

Various methods of testing welds are described and illustrated in recent issue of *Oxy-Acetylene Tips*, published by Linde Air Products Co., New York City.

Screw Movie 8

Prints in 16 mm. size of sound motion picture, *Thread Grinding—Fully Automatic*, are being made available by Jones & Lamson Machine Co., Springfield, Vt. Movie uses some animation to portray complicated operations of machines for automatically producing precision threads in large and small lots.

Rivet Chart 9

Cherry Rivet Co., Los Angeles, is distributing 20x30 in., two-color wall chart on blind riveting operations showing proper rivet for materials .030 to .391 in. thick, flush riveting operations, proper sizes for brazier head riveting in various thicknesses, and correct riveting technique.

Treating Atmospheres 10

Westinghouse Electric & Mfg. Co., East Pittsburgh, announces new booklet giving chemical reactions, composition, cost, engineering information, and application on equipment employing the heat-treating atmospheres edogas, exogas, monogas, and ammogas in brazing, hardening, tempering, annealing, gas carburizing, sintering, and normalizing.

Metal Gage Comparator.....11

Chart compiled and partially reproduced in folder by R. R. Bostic, Los Angeles, shows gage information for all types of metals and wire for comparing gages direct to decimals, fractions, and millimeters. Chart size is 10½x23 in.

Felt Information 12

Engineering and mechanical applications of felt as a substitute for rubber, cork, and some fabrics and plactics are pointed out in *Felt Facts* by The Felt Assn., New York City., which also shows product's use in reducing vibration and in grinding, filtering, polishing, and other production operations.

MACHINERY & ACCESSORIES

Ball Bearings 13

Catalog No. 110 gives dimensions, loading ratings, and engineering drawings of various types of ball bearings made by Nice Ball Bearing Co., Philadelphia.

Chip Ringer 14

Average yield of about .02 gal. of oil per pound of chips is reported recovered by chip ringer marketed by Fletcher Works, Philadelphia. Its use is pictured in folder which also gives specifications for models with bowls of 14, 20, 26, 40, and 48 in. dia.

Balancing 15

Bulletin No. 26 from Tinius Olsen Testing Machine Co., Philadelphia, describes operation, construction, specifications, and engineering details of horizontal and vertical static and dynamic testing machines for balancing propeller shafts, fluid couplings, supercharger impellers, etc.

Turret Lathes 16

Design, mechanical features, and specifications of its line of Type H heavy duty turret lathes are presented in catalog of Libby Div. International Machine Tool Corp., Indianapolis.

Conveyors 17

Illustrations in folder distributed by Lamson Corp., Syracuse, N. Y., show various installations of overhead conveyor systems for augmenting production.

*AVIATION READER'S SERVICE NOV.

AVIATION, 330 W. 42nd St., New York City

Please send me additional information according to key numbers circled.

INFORMATION TIPS:		**1**	**2**	**3**	**4**	**5**	**6**	**7**	**8**	**9**	**10**	**11**	**12**	
13	**14**	**15**	**16**	**17**	**18**	**19**	**20**	**21**	**22**	**23**	**24**	**25**	**26**	**27**	**28**	**29**	**30**
31	**32**	**33**	**34**	**35**	**36**	**37**	**38**	**39**	**40**	**41**							
NEW PRODUCTS:		**42**	**43**	**44**	**45**	**46**	**47**	**48**	**49**	**50**	**51**	**52**	**53**	**54**
55	**56**	**57**	**58**	**59**	**60**	**61**	**62**	**63**	**64**	**65**	**66**	**67**	**68**	**69**	**70**	**71**	**72**
73	**74**	**75**	**76**	**77**	**78**	**79**	**80**	**81**									

NAME..... TITLE.....

FIRM OR AFFILIATION.....

ADDRESS.....

INFORMATION TIPS

Paint Spraying 18
Made for hanging on shop walls, chart gives workers 21 rules on using paint spraying apparatus efficiently. It is released by Eclipse Air Brush Co., Newark, N. J.

Extractor 19
Pictures and text in folder show operation and features of pipe and stud extractor manufactured by Reps Tool Co., New York City, for pipe from ¼ to 2 in. and bolts and screws from ⅜ to 3½ in.

Metal Cutter 20
Illustrated in folder from De Wald Products Corp., Lancaster, Pa., cutting machine for light weight metal can use either circular saw or abrasive wheel, has capacity in ferrous and non-ferrous bar stock to 1½ in., in light walled steel tubing to 4 in., and in flat bar stock to 1x4 in.

Bearings 21
Facts About Anti-Friction Bearings offers 76 diagrams, 41 phantom drawings, photographs, and text to explain functions of various types of bearings, transmission of loads, and designs. Prepared by Ahlberg Bearing Co., Chicago.

Sealer 22
Package Machinery Co., Springfield, Mass., is distributing broadside describing machine for sealing moisture-proof bags of 30 in. max. width and any length. It can be installed for use with conveyor systems.

Pipe Gage 23
Inside diameter of pipe from ⅛ to 12 in. and proper drill size for tapping are said to be obtainable through use of new pipe gage which Three-Point Gage Co., Chicago, illustrates in folder.

Oil Purifiers 24
Eleven types of oil reclaimers in its A and GH series with capacities of 2½ to 120 gal. in 70 to 90 min. are illustrated with specifications in folder by Youngstown-Miller Co., Sandusky, Ohio.

Hydraulic Catalog 25
Information for engineers in new catalog on hydraulic cylinders produced by Hanna Engineering Works, Chicago, includes schematic drawings and dimensions, mounting arrangements, velocity and piston alignment charts, cushioning, and hand- and foot-operated valves.

Finishing Machines 26
Bulletin No. 502 of Hammond Machinery Builders, Kalamazoo, Mich., gives information regarding the company's machines for grinding, polishing, and buffing tubes, bars, rods, and other cylindrical shapes from ¾ to 9 in. o.d.

Flaring Tool 27
Following introduction of soft steel, copper-coated tubing as a substitute for copper and aluminum, Everhot Products Co., Chicago, announces special flaring tool for use on this substitute tubing. It is designed for sizes from ⅛ to ⅝ in. o.d. and it is shown in catalog sheet issued by the company.

Screws and Lacing..... 28
The Bristol Co., Waterbury, Conn., announces Bulletin No. 773 on its line of steel belt lacing and Bulletins Nos. 849 and 850 giving respective prices on its multiple-spline and hex type screws.

Tool Steel 29
Tungsten-molybdenum steel made under name "Mustang" by Jessop Steel Co., Washington, Pa., is said by company to deliver maximum hardness and wear resistance for tools operating at more than 300 deg. F. Applications, analysis, and information on forging, annealing, hardening, quenching, and tempering, properties and forms available are given in illustrated leaflet.

Belt Surfacing 30
Booklet prepared by Porter-Cable Machine Co., Syracuse, N. Y., explains the company's apparatus for wet belt machining of hard and soft metals, other compositions, as well as rubber, plastics, and wood.

PLASTICS

Phenolic Data 31
Information for engineers and industrial designers on the properties, manufacture, and uses of Dilecto, laminated phenolic plastic produced by Continental-Diamond Fibre Co., Newark, Del., is given in charts text, and photos in Company's Catalog No. DO 43.

Plexiglas Data 32
Booklet prepared by Rohm & Haas, Philadelphia, contains technical data on the mechanical properties of plexiglas. Specific gravity, hardness, strength, modulus of elasticity, and cold flow or creep are considered in illustrations, tables, charts, and text.

• Announcements of new machine tools and shop equipment and accessories are invited for inclusion in these columns. In writing, emphasis upon aviation industry applications of newly-marketed items is desirable, and, wherever possible, glossy-print photos should be enclosed for illustration. Manufacturers should address New Products Editor, AVIATION, 330 W. 42nd St., New York City.

Lucite 33
Vol. 5 of *Plastics Bulletin* prepared by E. I. du Pont de Nemours, Arlington, N. J., contains physical property data, illustrations, and graphic and textual descriptions of new heat-resistant "Lucite" methyl methacrylate resin molding powder.

ELECTRICAL

Fitting Charts 34
Two wall charts prepared by Cannon Electric Development Co., Los Angeles, on AN connectors show scale-size insert arrangements and part identification numbers.

Electronic Equipment 35
Electronic Enterprises, Newark, N. J., publishes booklet of operating principles, construction, and specifications of its various electronic equipment, including mercury vapor rectifier tubes, half-wave mercury vapor and half-wave high-vacuum rectifiers, oscillator, and transmitting triode.

Insulators 36
Technical data on the installation of its vibration insulators in conjunction with aircraft radios is contained in Bulletin No. V-1 offered by Harris Products Co., Cleveland.

Power Plants 37
On experience of 300 power plants, Oakite Products, New York, has listed in booklet 65 cleaning and servicing procedures for lengthening life of steam generating, and electric power and light plants. Company also issues booklet describing its Composition No. 90 for Anodic degreasing of steel and copper.

Light Flasher 38
Wallace & Tiernan Products, Belleville, N. J., issues folder explaining construction of its device, approved by CAA, for flashing aircraft tail lights. It employs a motor connected to a d.c. circuit.

MANAGEMENT & EMPLOYEES

Foremanship Film 39
Sound movie of foreman's duties at Pratt & Whitney Aircraft, East Hartford, Conn., shows importance of maintaining good relations within and without the foreman's department. Picture, available to other manufacturers on a service basis, runs 41 min.

Office Records 40
Recent issue of *Systems*, published by Remington Rand, Buffalo, shows how company's systems for keeping records of production, materials, parts, etc., have been employed in aircraft and other manufacturing plants.


Termination Regulations 41
Aeronautical Chamber of Commerce, Washington, is distributing, at printing cost, copies of War Dept. regulation, *Termination of Contracts for the Convenience of the Government.*

Latest Machine Tools

NEW PRODUCTS

Magnetic Polisher.... 42

Direct current supplied by a rectifier is used to hold parts from 1½ in. dia and up in polishing lathe announced by **Lima Electric Motor Co.**, Lima, Ohio, Available in pedestal or bench types with various motor speeds to 3,600 rpm., polisher is controlled by a foot pedal

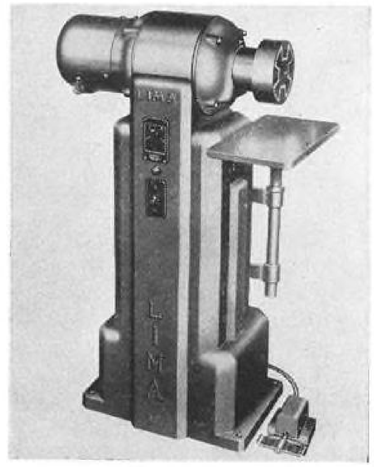


which magnetizes chuck and starts and stops motor at the same time. Swinging table attached to pedestal can be adjusted to various size chucks.—AVIATION, *Nov.*, '43.


Paint Baker 43


Designed for aircraft engine plants, paint baking oven for various size aluminum alloy parts has a continuous flat screen conveyor 40x5 ft. It is supported on cross pieces in a heavy chain which is driven by variable speed drive. Air to volatilize paint solvents is supplied to a fuming zone at 150 to 225 deg. F. Baking heat of 350 deg. F. is created electrically; air circulates over the heaters, through the working section of the oven, and finally back to a recirculating fan in the oven roof. Automatic controls maintain temperature, and safety switches shut off heat and motor if fan or power supply fails. Baseplates which carry parts through oven are returned to loading end on a conveyor, reports maker, **The Gehnrich Corp.**, Long Island City, N. Y.—AVIATION, *Nov.*, '43.

Shaper..... 44

Three types of shapers offered by **General Engineering & Mfg. Co.**, St.



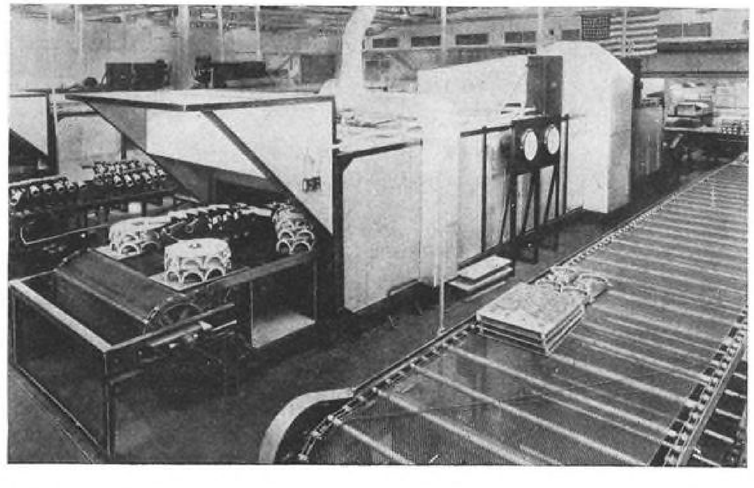

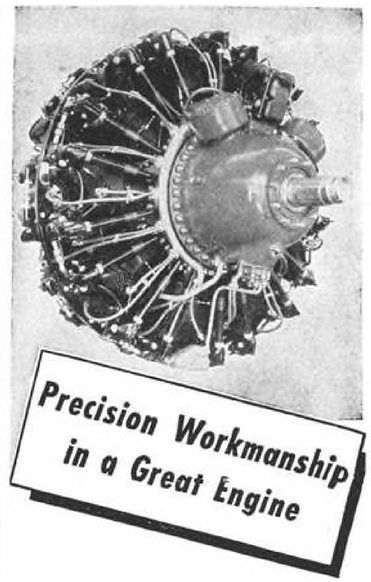

AMERICAN built planes are bringing the Axis nearer and nearer to the day of reckoning. Airplane engines like this are at the core of the drive. These great engines — power-houses of tremendous energy packed in a surprisingly small space — require the finest built parts fitted to close tolerances to perform their exacting tasks.

Many parts for planes and aircraft motors are produced in the Fenn plant, where skill and craftsmanship are devoted solely to war production tasks.

A capable engineering staff, directed by alert management, stands ready to help manufacturers with their production problems.

Fenn acts as prime contractor or sub-contractor on Special Machinery, parts and equipment. We welcome inquiries from those who need assistance in either development work or actual production.

FENN
THE FENN MFG. CO.
HARTFORD, CONN.
ESTABLISHED 1900



-The Search ends with "ALLENS"

In tests of arms, explosive shocks make war on hollow screws. Giant stresses attack the holding-power of fastenings. Behind battle-fronts the machinery of production strains and batters away at restraining *threads.*

But for 30 years before this war, "ALLENS" met tests no less critical at the time. Each new demand for holding-power brought new Allen developments *in advance.* We proffer you now—Dependability *IN ADVANCE.*

* * *

Order through your Industrial Distributor, to take advantage of his position as the *mass-purchasing agency* for your locality.

THE ALLEN MANUFACTURING COMPANY
HARTFORD, ★ ALLEN ★ CONNECTICUT, U.S.A.

NEW PRODUCTS


Louis, have range of 11-140 and 10-130 strokes per min. Sizes available are 16-20 and 16-20-24 in. with standard equipment including single or double screw vise, operating wrenches, and V-belt or motor drive. Accessories available are powered rapid transverse, powered down feed, concave attachment, mold maker's vise, and tilting-top table. Special features of machine are said to be lubricating system which prevents main control from being operated if oil pressure is low or if main motor drive is stopped, lock which prevents tool head from creeping under heavy cuts, and adjusting dials raduated in thousands.—AVIATION, *Nov.*, '43.

Oil Purifier..... 45

Line of engine oil purifiers manufactured by **The Hilliard Corp.**, Elmira, N. Y., is now announced to include models for handling from 50-65 gal. per hr. to 75-130 gal. and more. Cleaning operation involves use of "Hilite" fullers earth or activated clay, which absorbs foreign solids after the mixture has been heated to dispell moisture and dilution. Compressed air then forces mixture through a filter press, which retains solids, and finally through a secondary filter.—AVIATION, *Nov.*, '43.

Plywood Planer..... 46


For planing of ply and other woods in lengths as short as 6½ in., machine made by **Boice-Crane Co.**, Toledo, has two idler rolls on adjustable journals for steady feeding which can be stopped without cutting off power. Bench and

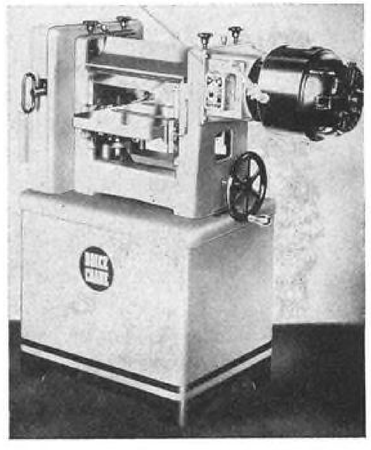

floor models are offered with V-belt drive from electric motor or from lineshaft or gasoline engine.—AVIATION, *Nov.*, '43.

Thread Grinder..... 47


American-designed thread grinder for single- or multi-ribbed wheels is announced. It will take work up to 12 in. long and grind 8 in. of it in single or multiple right- or lefthand threads

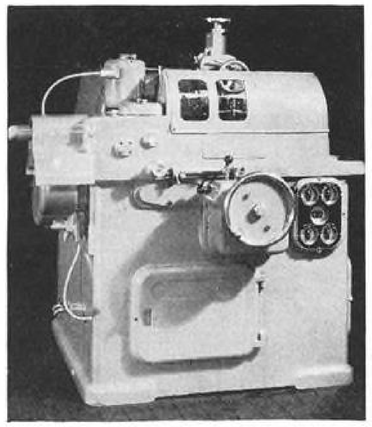


in any pitch up to 60 per in. Maximum work diameter is 7 in. and maximum thread diameter 3 in. Two, three or four threads, reports **The Sheffield Corp.**, Dayton, Ohio, can be made in one pass. Some models are offered for automatic cycle grinding; with them the operator, after initial set up for first piece, need only load and unload machine, and move lever which repeats cutting cycle.—AVIATION, *Nov.*, '43.


Riveting Welder..... 48

Machine designed by **Progressive Welder Co.**, Detroit, for resistance welding has been adapted to rivet stamped assemblies. In one instance (illustrated) welder, equipped with indexing table, hot-upsets and rivets hydraulic flywheel vanes. Conventional welding timers, operating on lower current density, supply proper amount of heat to ends of vanes which protrude through an assembly ring.—AVIATION, *Nov.*, '43.



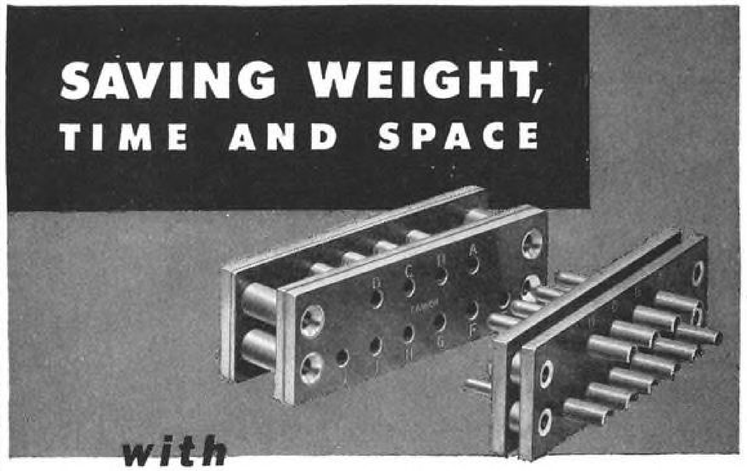

CANNON PLUGS



This panel connector is one of the Cannon DP series. It was developed primarily for use on radio and instrument plug-in equipment where weight, space and convenience of operation are often prime considerations

Both halves of this connector are mounted rigidly. One half mounts on the back of any electrically operated unit. The other half mounts on a rack or panel designed to hold the unit. By this means the excess weight of terminal strips and slack in the cable are eliminated.

In addition to saving weight, Cannon DP Connectors offer many convenient and time-saving advantages in servicing operations



24 page bulletin with drawings and engineering data on DP connectors available on request. Address Department A-110, Cannon Electric Development Co., Los Angeles 31, California.

CANNON ELECTRIC


Cannon Electric Development Company, Los Angeles 31, Calif.

Canadian Factory and Engineering Office: Cannon Electric Co., Limited, Toronto

REPRESENTATIVES IN PRINCIPAL CITIES—CONSULT YOUR LOCAL TELEPHONE BOOK

THEY ALL GET TOGETHER ON THIS

American flyers in the Far East favor one type of fighter plane — the Russians pick another type — the British go for a third — and still a fourth is the special pet of scrappy American birdmen rolling up records around southern Europe and in the Aleutians. ★ All four of these American-built fighters have one thing in common—the Allison engine. ★ And typical of the high regard in which the flyers hold this engine is that of one much-decorated American pilot, who says bluntly, "No engine is more dependable than the Allison." ★ We're glad they feel that way. That is welcome reward for the pains Allison takes — in design, in materials, in workmanship—to achieve peak precision and superfine quality. ★ It is General Motors' purpose to build the best aircraft engine in the world. ★ How well we succeed is a matter best reflected by actual combat results.

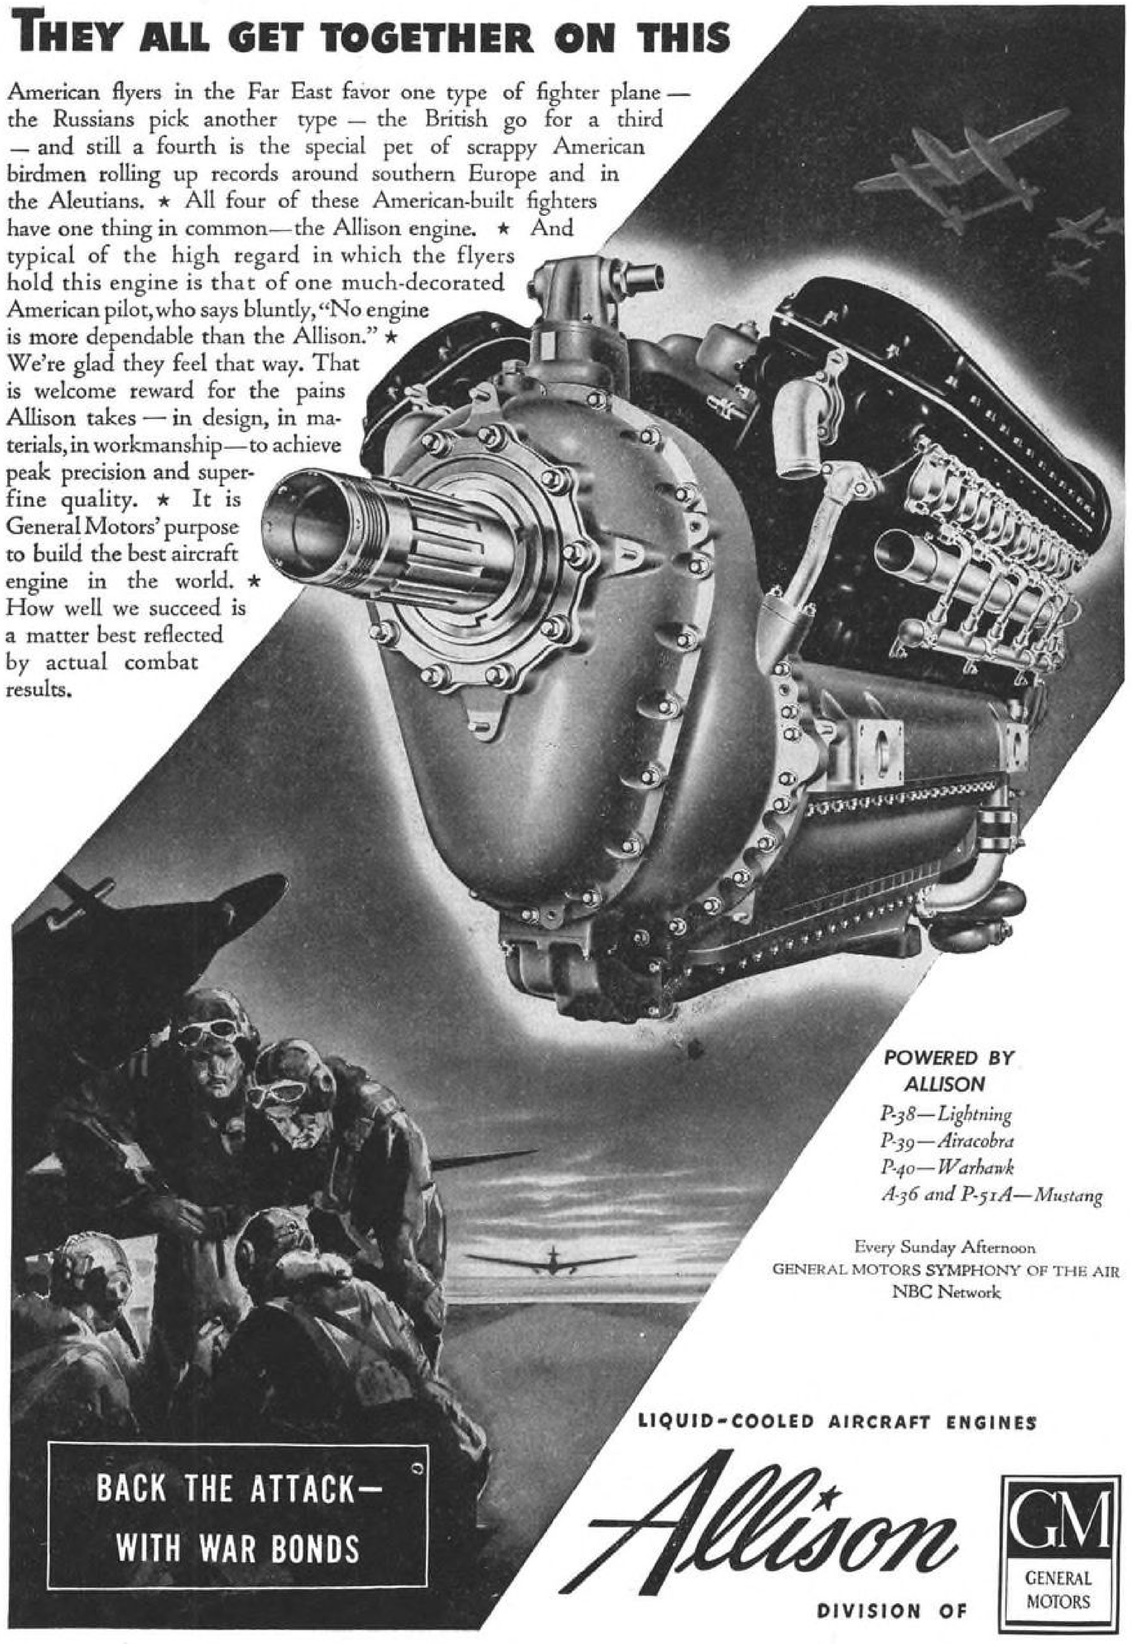

POWERED BY
ALLISON
P-38—Lightning
P-39—Airacobra
P-40—Warhawk
A-36 and P-51A—Mustang

Every Sunday Afternoon
GENERAL MOTORS SYMPHONY OF THE AIR
NBC Network

LIQUID-COOLED AIRCRAFT ENGINES

Allison

DIVISION OF GM GENERAL MOTORS

Shop Equipment and Accessories

NEW PRODUCTS

Tire Bead Loosener 49

Said to be suitable for loosening rims from beads of tires from small tailwheel type to 65 in. size, new tool developed by **Firestone Tire & Rubber Co.**, Akron, comes in kits 38x6x6½ in. which weigh 48 lb. It is reported to make




woman's work out of a difficult job. In removing a tire, hooks are forced between rim and bead by a lever and two tire irons are used (photo) to loosen bead. Loosening tire from rim, Firestone says, is still a two-man job with equipment supplied with kit, which also contains tools for valve work and a hammer for one-man tire mounting.—AVIATION, *Nov.*, '43.

Standard Cutters 50

Line of standardized thread milling cutters, cut from blanks by number and thread specification by **Detroit Tap & Tool Co.**, Detroit, include 40 different shell types from 1½ to 3½ in dia. and 12 shank types from ¾ to 1½ in. dia. Both have right-hand spiral flutes and 5 deg. rake angle.—AVIATION, *Nov.*, '43.

Lathe Turret..... 51

Self-indexing lathe-bed turret with six tool stations and individual stops introduced by **Kessler Aero Tool Co.**, Burbank, Calif., can be back-indexed by hand when less than full set of six tools are used. Operating lever has maximum stroke of 4 in.; minimum index stroke is 1½ in. Pre-loaded Timken bearing, adjustable for wear, supports turret head.—AVIATION, *Nov.*, '43.

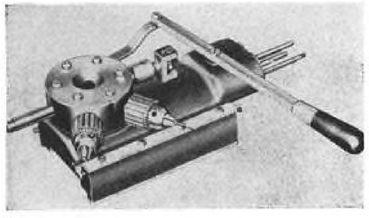

Protective Film 52

Applied by brushing or dipping, protective coating made by **Insl-X Co.**, Brooklyn, can be stripped from rough or smooth parts by hand. No further cleaning is required. Coating is reported to dry quickly after application and to have withstood 100-hr., 3-percent salt spray tests on steel, copper, brass, and aluminum. It is manufactured in types for long- and short-term service.—AVIATION, *Nov.*, '43.

AN-S-14
AN-QQ-S-684
AN-QQ-S-752

Aircraft Alloy Steels in Ryerson Stocks

Aircraft quality 8630, X4130 and 4140 alloy steel bars—hot rolled, cold finished and heat treated — in a wide range of sizes are carried in stock for immediate shipment from Ryerson plants at Chicago, St. Louis, Cincinnati and Jersey City. These steels conform to specifications: AN-S-14, AN-QQ-S-684, and AN-QQ-S-752 respectively and are readily available to aircraft manufacturers and their subcontractors under the ACW program. A special booklet of stocks on hand, "Aircraft Alloy Steels," including condensed specifications for AMS and AN-S steels, will be sent to you on request.

Other steels at ten Ryerson plants comprise over 10,000 different kinds, shapes and sizes — everything in steel. Call your nearby Ryerson plant first — for quick action on steel.

Joseph T. Ryerson & Son, Inc., Steel-Service Plants at: Chicago, Milwaukee, St. Louis, Detroit, Cleveland, Cincinnati, Buffalo, Boston, Philadelphia, Jersey City.


RYERSON


Three reasons to PRESSURIZE CABINS FOR LOW-ALTITUDE FLYING!

5. What do you dislike about flying ?

Can't stand the "ups and downs"
I always feel dizzy
Makes my ears ache

A RECENT SURVEY reveals the most common passenger objections to air travel are the *discomforts caused by changing air pressures.* And as chart here shows, pressure changes are most severe at the comparatively low altitudes through which most airlines operate . . . and are greatest during the airliner's climb and descent.

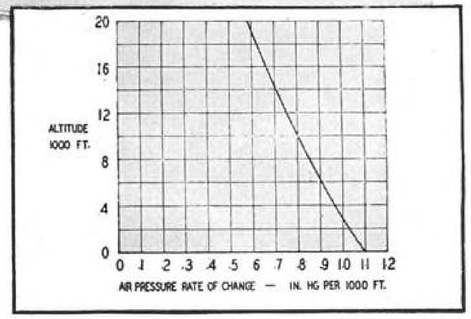

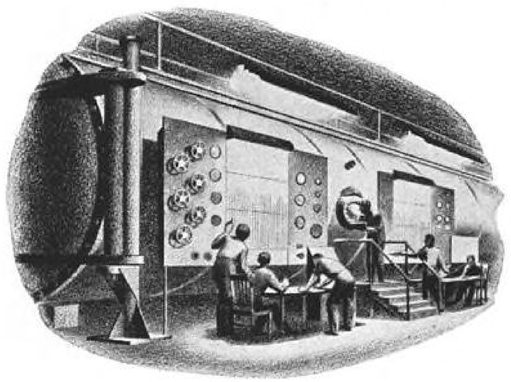

IN OUR "STRATOLAB," AiResearch engineers have been perfecting controls to *hold pressure constant* during climbs and descents . . . to *adjust pressure* gradually during airliner flight from low to higher altitude airports.

AiResearch Cabin Pressure Regulating Systems will be able to hold *sea level* altitude inside airliners flying as high as 20,000 feet!

From this AiResearch engineering will come pressurized cabins for postwar airliners–"living room" comfort for passengers at all times . . . and increased travel business for the airlines.

Information is available now to U. S. aircraft manufacturers and airline operators.




AiResearch
MANUFACTURING COMPANY
LOS ANGELES • PHOENIX
DIVISION OF THE GARRETT CORPORATION

"Where Controlled Air Does the Job" • Automatic Exit Flap Control Systems • Engine Oil Cooling Systems • Engine Air Intercooling Systems • Exhaust Heat Exchangers • Supercharger Aftercooling Systems • Engine Coolant Systems

NEW PRODUCTS

Carbide Reamers..... 53

Hardened shanks are being offered by **Tungsten Carbide Tool Co.**, Detroit, in its line of standard-sized carbide tipped reamers. With straight or tapered shanks, they are available in sizes from




¼ to 1½ in. Up to 1 in., steps are 32nds in. apart; above that diameters change in 16ths. There are four flutes on sizes up to ½ in., six flutes to 13/16 in., and eight on larger sizes. Tips are diamond-ground and outside diameter said held to tolerance of +0 and −0.0003 in.—AVIATION, *Nov.*, '43.

Plugs and Sockets..... 54

With 2, 4, 6, 8, 10, and 12 contacts, plug and socket series 2400 of **Howard B. Jones**, Chicago, features increased leakage path and interchangeability with firm's 400 series. Bakelite molded according to Navy specification 17P4, plugs and sockets have contacts recessed in pockets. Barriers surround new type contacts which have four flexing surfaces for each plug prong. Socket contacts are silver-plated phosphor bronze while plug contacts are silver-plated brass ¼x1/16 in. Shallow brackets are available for flush mounting, deep brackets for recessed mounting.—AVIATION, *Nov.*, '43.

Contactor..... 55

To meet AAF specification 94-32185D, **Square D Co.**, Industrial Controller Div., Milwaukee, has developed contactor for remote control, regulation of d.c. motors,






THESE Bond Aviation Casters are the newest application of the time-tested Bond policy of building casters to fit the job. They're specially engineered for aircraft production—and aircraft production is just what they're promoting in leading plants. Put 'em on *your* job . . . and materials will move faster.

BOND V-GROOVED WHEEL CASTER

Built especially for use on track line assembly—which eliminates obstructions to materials flow—this new Bond Caster saves time and floor space . . . reduces effects of floor vibration. Double ball race construction. Pressure lubricated throughout.

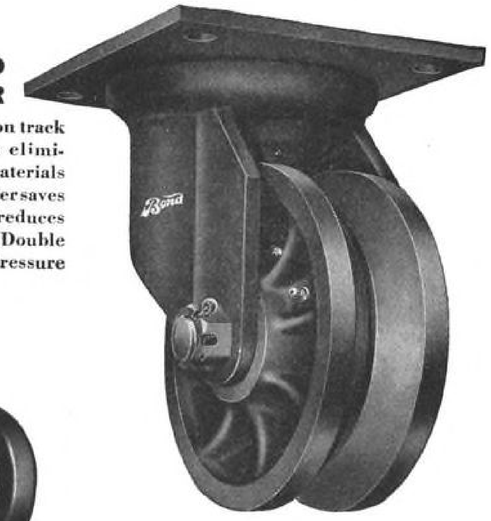



BOND DUAL WHEEL CASTER WITH OSCILLATING AXLE

This Bond Caster levels out the bumps because both wheels always hug the floor no matter how rough the surface. Oscillating axle distributes the load evenly on both wheels. Sudden tilting of engine stands is eliminated . . . shock is reduced . . . damage prevented. Double ball race construction. Pressure lubricated throughout. Also supplied with Swivel Lock.

***Get the Facts* FREE!**




New Bond Folder R-39 gives you the facts about all of the Bond Aviation Casters. Write for your copy today.

BOND FOUNDRY & MACHINE COMPANY, MANHEIM, PA.

Bond * TRUCK CASTERS
* Reg., U. S. Pat. Off.

NORTON ABRASIVES

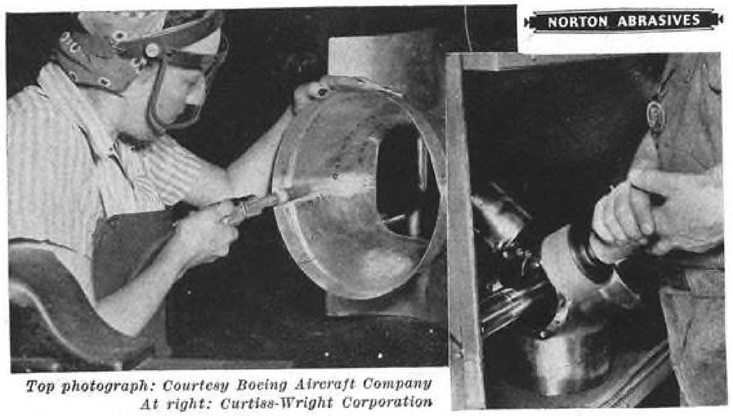

Top photograph: Courtesy Boeing Aircraft Company
At right: Curtiss-Wright Corporation

Saving TIME, MONEY— *Possibly* LIVES

YOU'LL BE ASTONISHED at the speed and economy with which these Metalite Cloth "Gadgets" do slow, costly little metal finishing jobs. The accuracy of finish or radius produced by them on many vital parts also contributes to the eventual performance and safety of the whole.


Honestly, now, have you fully explored what these many little abrasive cloth forms can do for you right on tools now in use in your plant? Have you had a Behr-Manning Field Engineer show you all the shapes and sizes — even demonstrate them on the jobs you select?

Concerns such as those who supplied our illustrations have made great savings by adopting "Gadgets" as the principal means of doing the most irritating kind of finishing operations —irritating because the time consumed formerly was so out of proportion to their size.

Write direct to Troy or our nearest Branch for the services of one of our able Field Engineers.

Boston, Buffalo, Chicago, Cincinnati, Cleveland, Detroit, Grand Rapids, High Point, Indianapolis, Los Angeles, New York, Philadelphia, St. Louis, San Francisco, Tacoma.

BEHR-MANNING · TROY, N.Y.
(DIVISION OF NORTON COMPANY)




NEW PRODUCTS

and relaying in gunfiring, lighting, and communication circuits. Known as Type B2A, contactor is rated at 25 amp. continuous duty up to 29 v. d.c. and is reported to operate up to 10G and vibrations of 55 cycles per second at $\frac{1}{16}$ in. excursion. No damage is said to result from exposure to temperature extremes of —75 to 200 deg. F.—AVIATION, *Nov.*, '43.

Fluid Valve..... 56


A new solenoid operated fluid shut-off valve which weighs 6.96 oz. is announced by **Adel Precision Products**, Burbank, Calif. It was designed for remote control of anti-icing fluid flow and is also adaptable for control of heater fuel, oil dilution, and lavatory and drinking water

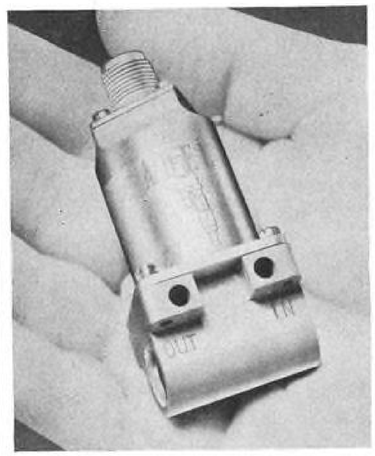

in commercial transports. New valve has a dural body, is equipped with standard AN 3102-8S-1P receptacle, and comes in port sizes for $\frac{1}{8}$ in. pipe thread or $\frac{1}{4}$ in. tube fittings. Valve is normally closed and installation may be planned for any operating position. Current requirement is .25 amp. at 24 v. dc., and units are available for working pressures of 50 and 250 psi. They have been approved by Society of Aeronautical Weight Engineers.—AVIATION, *Nov.*, '43.

Tubing Protector..... 57

Developed by **Packless Metal Products Corp.**, New Rochelle, N. Y., at request of aircraft manufacturers, hose strap to eliminate whip consists of cone-spiral spring which is screwed to supporting surface and snaps over hose or tubing.—AVIATION, *Oct.*, '43.

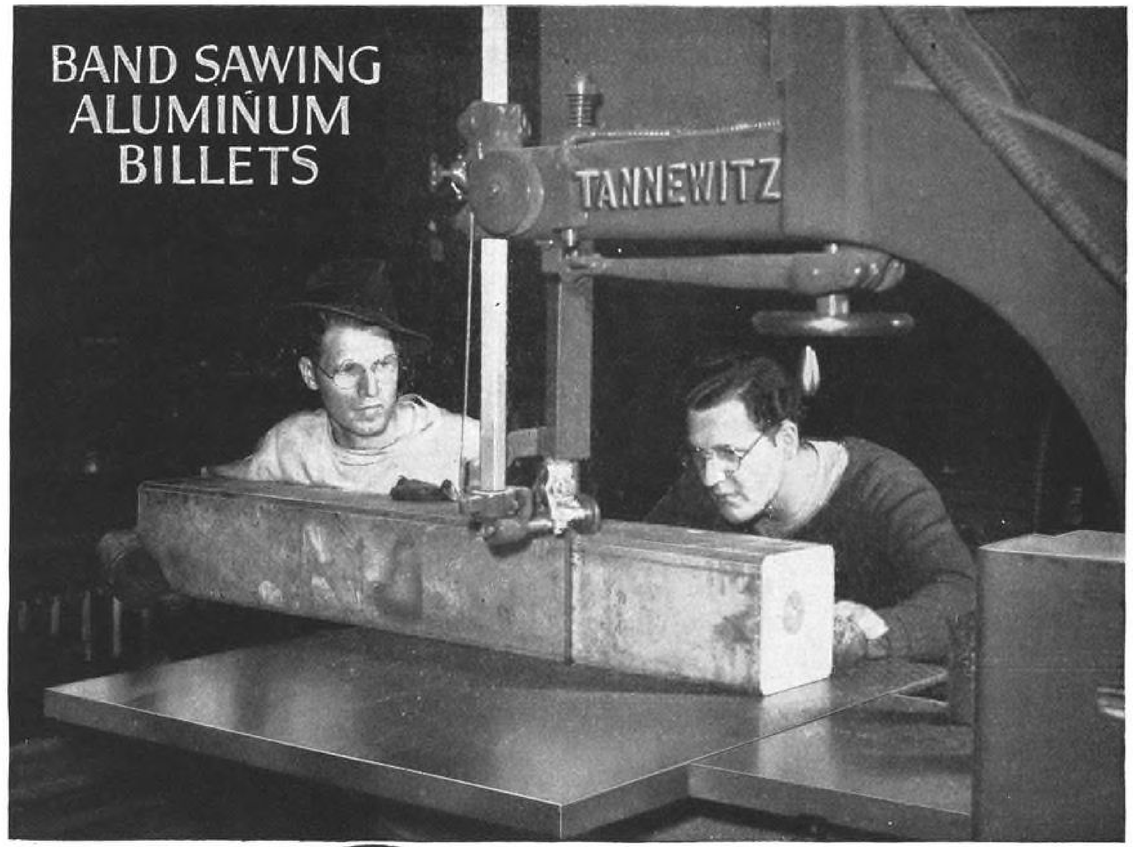

Tannewitz
METAL CUTTING BAND SAWS

. . . are constantly effecting truly amazing production increases, with corresponding reduction of costs, in the cutting of:

•

SHEET STEEL and NONFERROUS METALS — BOTH FORMED AND FLAT

•

CUTTING OFF GATES AND RISERS FROM CASTINGS OF ALL SIZES AND TYPES OF METAL

•

CUTTING LARGE BLOCKS OF ALUMINUM, MAGNESIUM and OTHER METALS

•

DI-SAWING — INSIDE AND OUTSIDE FILING and POLISHING

•

The complete line affords machines to accommodate work of any size. Take the first step towards eliminating the bottle neck of metal cutting by writing for bulletins listed at left.

BULLETINS
Worth Writing for:
SHEET METAL CUTTING BAND SAWS
•
SINGLE AND VARIABLE SPEED BAND SAWS FOR FOUNDRY USE
•
BAND SAWS FOR DI-SAWING, FILING and POLISHING

THE TANNEWITZ WORKS, GRAND RAPIDS, MICH.


parts. They have malleable motor housings and throttle heads. Models are manufactured with button or lever throttle controlling speeds of 15,000 to 18,000 rpm. Maker, **Aro Equipment Corp.**, Bryan, Ohio, gives weight as 4 lb. Adapters, collets, and extensions can be supplied.—AVIATION, *Nov.*, '43.

Portable Grinders 58

For grinding and cleaning foundry castings, portable pneumatic grinders will take 2 in. wheel or rotary file burrs for working on aluminum or magnesium

Cabin Fans 59

Light weight, high pressure axial flow fans in three sizes are announced by **Dynamic Air Engineering Co.**, Los Angeles, for recirculation of cabin air

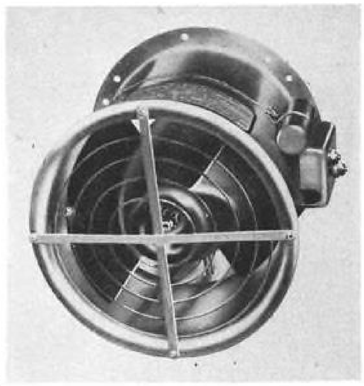


through gasoline combustion heaters on medium and heavy bombers. Smallest of three, powered with a $\frac{1}{5}$ hp. series wound, 24-28 v. motor, weighs 5.7 lb. and delivers 320 cfm. air at sea level against 2 in. water gage pressure, or 450 cfm. against $1\frac{1}{2}$ in. at 20,000 ft. Inside diameter is 6 in. A second size (illustrated) with $\frac{1}{2}$ hp. motor and a second propeller on a double-extended shaft, delivers 25 percent more volume at double original pressure. Third unit is 7 in. dia. and will deliver approximately 60 cfm. at 5 in. pressure.—AVIATION, *Nov.*, '43.

Plastic Insulation 60

Furnished by **Carter Products Corp.**, Cleveland, plastic tubing for electrical insulating work contains color stripes for identification. It is known as "Striatube" and is available in flexible or rigid form of various sizes, thicknesses, and lengths. Company states it has high dielectric strength, non-oxydizing properties, and good resistance to acids, alkalies, oils, and greases.—AVIATION, *Nov.*, '43.

Angle Tool 61

For use on flexible shafts and small portable tools in drilling, reaming, burring, countersinking, and light grinding, new 90 deg. angle head employs miter gears operating in large ball bearing surface. **Bell Tool Co.**, Chicago, gives dimensions as $1\frac{3}{8}$ in. high and $5\frac{1}{8}$ in. long including power-receiving shaft.—AVIATION, *Nov.*, '43.





"YANKEE" Spiral Screw Driver No. 130A


Time saved in the Battle of Production shortens the days to Victory . . . and "Yankee" Fine Mechanics' Tools save time. A minute here and a half-minute there seem unimportant in themselves. Multiplied by the thousands of "Yankee" Tools in service, they total hundreds of man-hours. . . . For nearly half a century, "Yankee" on tools has been the mark of ingenious and dependable performance — of faster and easier work on countless jobs. Safeguard your "Yankee" Tools. They are weapons of war and must be treated right. And when they again become the tools of peace, you will find them immediately useful for your post-war needs.

Order from your supply house, or write North Bros. Mfg. Co., Dept. AV-1143, Phila., Pa. Furnish priority ratings whenever possible, and every effort will be made to fill your orders.

"YANKEE" TOOLS
make good mechanics better
North Bros. Mfg. Co., Phila. 33, U. S. A.
Established 1880

Helium Welding 62

General Electric Co., Schenectady, N. Y., announces development of manual and automatic equipment for arc welding with helium of magnesium and its alloys, aluminum, and light weight alloys. Automatic unit (illustrated in use




at G-E laboratory) is stated to weld up to 40 in. min. in $\frac{1}{8}$ in. stock. Magnesium filler is here unrolled into work through nozzle rod (lower left). Tungsten electrode extends through rod perpendicular to work. Helium is discharged around this electrode. Electronic motor control maintains even arc length which can also be drawn by a carbon electrode.—AVIATION, *Nov.*, '43.

Screw "Rivet" 63

New fastener consists of recessed-head screw inserted in hollow aluminum alloy stem with a knurled nut on end of screw. Drawing up on screw tightens whole assembly. **Pacific Railway Equipment Co.**, Los Angeles, says it is suitable for any job where rivets, particularly blind ones, are used. After regular riveting procedure of drilling, burring, reaming, gaging, and clamping, screw rivet is installed by power screwdriver fitted with special finder. Two available types, flush and raised head, are made in $\frac{1}{8}$, $\frac{5}{32}$, and $\frac{3}{16}$ in. dia. and normal range of grip lengths.—AVIATION, *Nov.*, '43.

Ammunition Booster 64

Device for feeding .50 caliber ammunition to aircraft guns has motor-driven sprocket which engages linked shells. Device, $5\frac{1}{8}$ in. long and $3\frac{1}{8}$ in. dia., operates on 24 v., drawing 10.5 amp. under 40 lb. load. It will deliver 840 rounds a minute, and life is given as upwards




of 50,000 rounds. It is reported to operate up to 40,000 ft. and between temperatures of −70 to 160 deg. F. Maker is **H. L. Harvill Development Co.**, Vernon, Calif.—AVIATION, *Nov.*, '43.

Indicator Tester 65

Device manufactured by **Clark Instrument**, Detroit, employs sine bar principle of checking against tangent of angle in testing dial indicating instruments. When indicator is mounted on top of tester with its zero reading coinciding with that of tester, a screw, which articulates a lapped block in contact with indicator spindle, is turned to check accuracy of readings at other points of indicator dial. Device is also reported suitable for checking direct and reversed reading indicators on Rockwell hardness testers.—AVIATION, *Nov.*, '43.

CRAFTINT SPEEDS PRODUCTION OF HANDBOOKS AND MANUALS

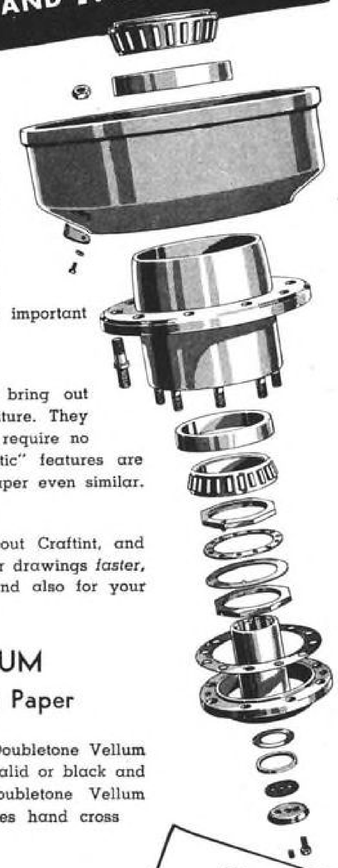

★ Hundreds of Aircraft and Parts Manufacturers have switched to Craftint Doubletone Drawing Paper in order to speed production of their vitally important Hand Books and Manuals. Craftint enables any draftsman or commercial artist to make three-dimensional drawings in a fraction of the time required to do hand shading. The countless man hours that Craftint saves are an important contribution to the war effort.

★ Craftint drawings enable the artist to bring out intricate details with minimum time expenditure. They are reproduced as straight "line" copy and require no complicated camera work. Craftint "automatic" features are fully patented. There is no other drawing paper even similar.

★ May we give you more information about Craftint, and tell you why it will enable you to have better drawings *faster*, both for your Hand Books and Manuals, and also for your Production Line Tracings.

DOUBLETONE VELLUM
the New Two-Tone Tracing Paper

★ Make your shaded tracings on Craftint Doubletone Vellum and produce your Blueprints, Van Dykes, Ozalid or black and white prints by direct contact printing. Doubletone Vellum answers all shading problems and eliminates hand cross hatching.

FREE
A sample demonstration kit of Craftint Doubletone. Write today.

THE CRAFTINT MFG. CO.
214 St. Clair Avenue ★ Cleveland, Ohio



Used in machine shops and tool rooms for finishing intricate dies. Used on production lines to clean castings, turnings and forgings . . . sharpen tools and do hundreds of grinding, finishing, polishing, burring, routing and etching operations.

Dremel Moto-Tool has AC-DC motor with shock-proof bakelite housing, oil-sealed (oil-less) bearings, and built-in cooling fan. Weighs only 13 ounces—so light and compact a *girl* can handle it with ease. Dynamically balanced armature eliminates vibration and provides precision control. Moto-Tool's high speed (27,000 rpm) permits finer, faster work—conserves cutters.

Dremel Moto-Tools are proving indispensable aids in speeding up war production in such plants as General Electric, Westinghouse, Remington Arms, Ford, Nash-Kelvinator, Consolidated Aircraft, Douglas and Northrup Aircraft, and many similar "Arsenals of Democracy."

10 DAY TRIAL

Try a Dremel Moto-Tool on your own jobs—in your own shop. See how versatile, how indispensable it is—how it saves time and materials. Order from your distributor. If he cannot supply you—write factory. PROMPT SHIPMENT on orders with proper priority.


Whether you have a Moto-Tool or any other type of grinder, use only genuine Dremel shop-tested Accessories—steel cutters, grinding points, brushes, sanders, etc. Write for literature.



DREMEL MFG. CO. Dept 513-L RACINE, WIS. U.S.A.

Collet Fixture 66

Hollow ram with rod for controlling depth is provided on pneumatic collet fixture which has maximum capacities of 1 in. round, $\frac{33}{32}$ in. square, and $\frac{7}{8}$ in. hexagonal. Adapter is provided for connecting this ram to standard draw-in collet up to 1 in. capacity. Control valve may be operated by foot pressure or attached for automatic operation to machine being used. Gripping power, says maker, **Mead Specialties Co.**, Chicago, is sufficient to hold cylindrical alloy steel while outside threads are cut with self-opening or ordinary dies. Sealing of fixture permits use of lubricants and coolants; alternate housing is available with openings for pumping oil through collet. Second control valve may be installed for operating automatic air ejecting mechanism provided in special base.—AVIATION, *Nov.*, '43.



Sealing Tapes 67

Furnished in 50-ft. rolls from $\frac{1}{2}$ to 24 in. wide three types of sealing tapes are reported in wide aircraft use by **Pittsburgh Plate Glass Co.**, Pittsburgh. They are (1) Fabseal—impregnated fabric gasket material which can be compressed to .010 in. when used as gasket in flying boat hulls and gas and oil tanks; (2) Chromseal—softer, solid ribbon fabricless compound that can be hand-molded for gasket use between riveted or bolted sections of integral or droppable fuel tanks and as a seal around plastic and glass enclosures; (3) Stratoseal—solid ribbon compound for sealing fuselages for stratosphere flights; it is said to remain flexible in temperature range —70 to 150 deg. F.—AVIATION, *Nov.*, '43.

Sanding Disks 68

Heat resisting resin bond, reported to withstand high friction temperatures, is used to bind aluminum oxide grit sheets to pliable fiber backs of sanding disks made by **Fiber Abrasive Corp.**, Chicago. Capable of being cleaned for re-use, disks are supplied in diameters from 6 to 26 in. and all grit numbers.—AVIATION, *Nov.*, '43.

NEW PRODUCTS

Cabin Thermostat 69


Bi-metal coil on flexing hinge composes temperature-sensitive element of thermostat for aircraft cabins. Entire assembly is suspended by spring on a bakelite base and enclosed in aluminum case which can be grounded. Duplex models for controlling dual heaters are available from **Barber-Colman Co.**, Rockford, Ill., which announces specifications as weight 7 oz. (duplex 14 oz.) and rating .5 amp. at 24 v. d.c.—AVIATION, *Nov.*, '43.

Radio Mounting 70

Ability to absorb vibration in any of three directions is reported to be feature of new aircraft radio and electrical equipment mounting announced by **United States Rubber Co.**, New York City. It can be used in as integral part of new equipment or incorporated in existing installation. Single mount will hold 6 to 12 lb.—AVIATION, *Nov.*, '43.

Air Chuck 71

Air-operated collet holding fixture for chucking machine screw parts for further work on drill presses, tapping machines, etc., has foot valve, permitting operator to load and unload with both hands. Device, manufactured by **Red-E-Air Chuck Co.**, Chicago, has Brown & Sharpe collets to chuck work in line with spindle despite variations in work diameter. Leverage action multiplies collet holding pressure to ten times that of air line. Size illustrated takes work to $\frac{7}{8}$ in. dia.—AVIATION, *Nov.*, '43.

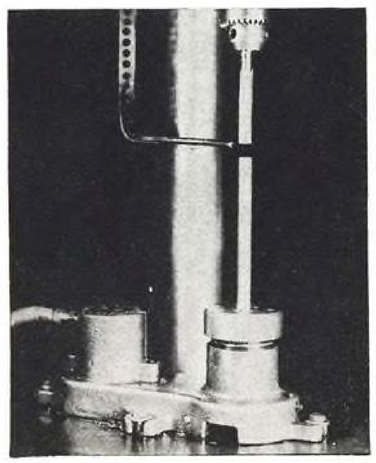




NEW PRODUCTS

Actuator 72

Electric or hydraulic power can be used on actuator designed for cowl flaps, intercooler flap doors, oil cooler flaps, etc. Operating mechanism contains jack screw and reduction gear. Warranted loads are 1,400 lb. tension and 800 lb. compression. Device is 18 in. long at maximum extension, 5⅛ in. high, 5 in. wide, and weighs 8 lb. It is manufactured by **Pacific Gear Works**, Lynwood, Calif.—AVIATION, *Nov.*, '43.

Selector Switch 73

Snap-action selector switch for sequence operation of various aircraft accessories is made with from one to four primary and twelve secondary circuits. One or more of these switches can be

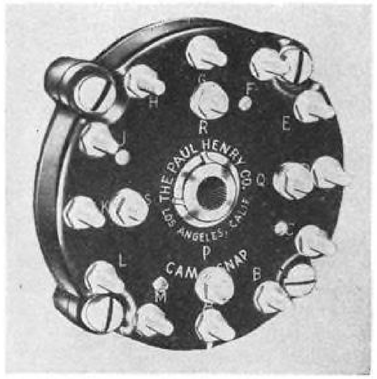


mounted in a gang and operated by single shaft. They are constructed of macerated phenolic with enclosing case by **Paul Henry Co.**, Los Angeles, and weigh about 4 oz. each.—AVIATION, *Nov.*, '43.

Ignition Files 74

Cards, 6½x9 in. containing an assortment of twelve ignition point files are being marketed by **New Britain Machine Co.**, New Britain, Conn. They are stated to be suitable for platinum and tungsten points.—AVIATION, *Nov.*, '43.

Hydraulic Jack 75

Features listed on new 10-ton wing jack produced by **Templeton Kenly & Co.**, Chicago, are center column lifting unit, safety retainer collar for compression loading, spherical base seat to prevent eccentric loading of hydraulic unit, and screw adjustment for micrometric

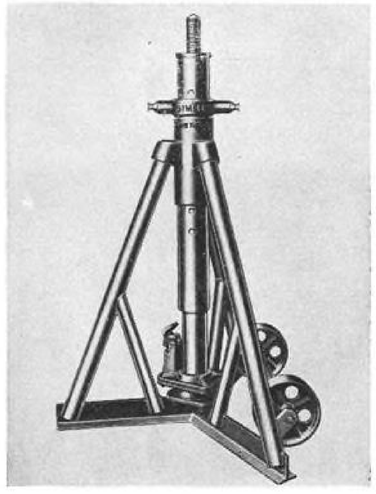

leveling for instrument checking. Specifications: Minimum height 43¾ in., maximum height 74¾ in., hydraulic lift 24 in., screw lift 7¼ in., and weight 265 lb. —AVIATION, *Nov.*, '43.



When electrical parts and materials to be installed in planes must "go together" in service, there's a real advantage in "getting them together" from a single source. Responsibility is centralized, deliveries are more easily scheduled, "mis-fits" are avoided, paper-work is reduced.

GRAYBAR offers a specialized service to plane builders, supplying hundreds of the *approved* items you need for plane wiring, signaling, lighting and power supply.

GRAYBAR offices in principal plane centers give local service, with individual attention to your needs.



WRITE FOR THIS CATALOG. This new "Aviation Materials" catalog (GB-5018) describes hundreds of electrical items designed especially for installation on planes. Get it from your local GRAYBAR office, or write:

GraybaR

Executive Offices: Graybar Building, New York 17, N.Y.

You need this New

SKILSAW CATALOG!

SPECIAL SECTION ON WAR-TIME MAINTENANCE of YOUR ELECTRIC TOOLS!

DO'S AND DON'TS in the care and operation of your Portable Electric Tools

How To Get the Most from Your Electric Tools!



● Help make your electric tools last *longer*, perform *better*, produce more! See that your mechanical, electrical and tool repair departments get copies of this *new* SKILSAW Catalog at once. It carries a Special Tool Maintenance Section that's crammed full of time-saving, money-saving suggestions on how to get the most from your electric tools in Wartime!

Whether you're using SKILSAW TOOLS exclusively . . . or whether you also use some other makes . . . you'll benefit by getting the new SKILSAW Catalog and Special Maintenance Section into the hands of your men *now!* SEND THE COUPON FOR YOUR *FREE* COPIES TODAY!

SKILSAW, INC.
5057 Elston Ave., Chicago 30, Ill.

Sales and Service Branches in All Principal Cities

Send now for free copies for your electrical, mechanical and repair departments!

SKILSAW PORTABLE ELECTRIC **TOOLS**

★ MAKE AMERICA'S HANDS MORE PRODUCTIVE ★

SKILSAW, INC.
5057 Elston Avenue, Chicago 30, Illinois


Please send.....copies of your new SKILSAW Catalog and Special Tool Maintenance Section to:

Name.....

Company.....

Address.....

City.....*State*.....

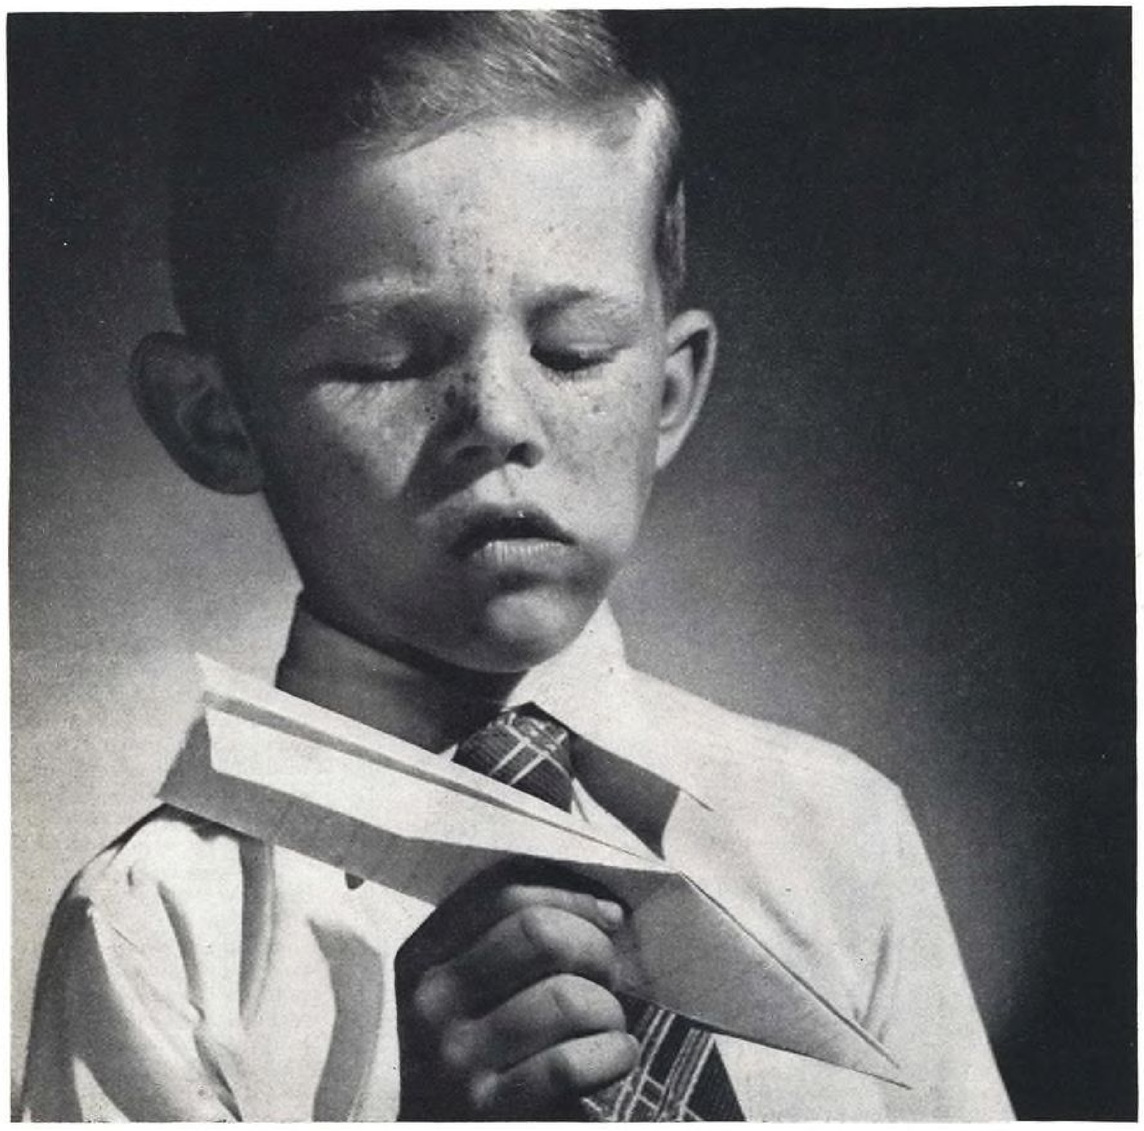

GROUNDWORK

Remember the plane you made from copybook paper and sent sailing up the aisle—right on teacher's desk . . . and how surprised you were to discover the supporting power of the invisible air around you? A little paper plane has been "first flight" experience for many of us—our initial introduction to a science destined to serve mankind and make neighbors of all the world's people.

With the war's end, this high ideal of aviation will be revealed. *Aviation will belong to everybody.* Even today, in war-busy aircraft plants, the plane you will fly tomorrow is taking form. A lot is known about its design, a great deal about its flying simplicity. Its economy of operation and moderate price is already taken for granted. Fleetwings is anxious to get that plane to you. That's one of the many reasons why Fleetwings is working so hard for victory.

Plant No 1


FLEETWINGS

Division of Kaiser Cargo, Inc.

BRISTOL • PENNSYLVANIA

FLEETWINGS

pioneers with parts and hydraulic equipment



Fleetwings B2 J2 Gun Turret Valve

THE EXPRESSION "Production keeps rollin'," is true in more than one sense at Fleetwings for the mobile production lines that Fleetwings pioneered for producing parts are now being extended. Parts in process of assembly are moved along on wheels. This system makes it easy to move them from one line to the next and does away with the need of hoists and extra factory hands.

AUTHOR! Not entirely satisfied with available text books, Fleetwings is now preparing its own instruction books for its employee training. Instruction book number one, on the subject of drilling, is published, and already others are on the presses. In all, Fleetwings expects to supply its classrooms with at least five. These books, tailor-made for Fleetwings production, will improve efficiency.

In one issue of "The Arrow," Fleetwings' pocket-size monthly magazine, the reader is treated to this varied fare of timely and interesting subjects: pre-doping of wing surfaces, case hardening tools to speed production, vertical lofting boards that save plant space, illustrated news about Fleetwings' personnel, how to make a wing chord divider beam, and an introduction to a newly designed hydraulic valve.



You can enjoy "The Arrow" each month at no expense. Just send your request on your company stationery to "The Arrow," Fleetwings, Bristol, Pa.


FLEETWINGS

Division of Kaiser Cargo, Inc.

BRISTOL • PENNSYLVANIA

Pneumatic Sander 76

Wide or narrow attachments are available for light-weight (6 lb.) high-speed (3,500 oscillations per min.) sander for use on flat, or curved abrading surfaced metal, wood, composition, or plastic.




Gripping and releasing handle on top of machine starts and stops opposed vibration of pads. This type movement is said by **Sundstrand Machine Tool Co.**, Rockford, Ill., to eliminate vibration.—AVIATION, *Nov.*, '43.

Flap Controls 77

Designed for quick, automatic response, new line of hydraulic temperature controls for operating aircraft flaps has been brought out by **General Controls Co.**, Glendale, Calif. They have been made for warplanes, but are called suitable for commercial craft as well.—AVIATION, *Nov.*, '43.

De-Icer Control 78

Eclipse-Pioneer Div., **Bendix Aviation, Corp.**, Teterboro, N. J., announces electronic control for use with its manifold solenoid de-icer system and B. F. Goodrich boots. Control box (see photo) has illustration of plane with lettered sections (including empennage) which are connected to a similarly lettered row of buttons. Buttons and dials regulate intervals between inflation cycles and amount of air supplied to boots. Control consists of distributor valves located at each boot connection and actuated by electronically controlled solenoid; pressure oil separater; air filter; air pressure relief valve; and unloading valve for air pumps. Pumping is reported reduced to a minimum by single spanwise suction and pressure manifolds.—AVIATION, *Nov.*, '43.



NEW PRODUCTS

Connecting Tool 79

Attachment for adapting standard compression rivet squeezers into tool for fastening its Sta-Kon electric terminals to all wire sizes No. 22 to No. 10 AWG is announced by **Thomas & Betts**, Elizabeth, N. J.—AVIATION, *Nov.*, '43.

Testing Unit 80

Model 804 dual tester is supplied by **Radio City Products Co.**, New York City, in case 14½x13x6 in. It weighs 12¼ lb. and is operated on 50-60 cycle 105-135 v. current supply for checking acorn and other types of radio receiving tubes and rectifiers. Ohmmeter reading ratio is 500,000,000 to 1; current reading ratio 1,000,000 to 1; voltage reading ratio 100,000 to 1; d.c. voltmeter range 0-25-10-50-250-1000-5000; a.c. voltmeter range 0-10-50-250-1000-5000; d.c. milliameter range 0-5-2.5-10-50-250-1000; d.c. ammeter 0-10; and ohmmeter 0-250-2500-250000-2.5 megacycles.—AVIATION, *Nov.*, '43.



Resonance Meter 81

Announced by **Erco Radio Laboratories**, Hempstead, N. Y., is new resonance meter reported suitable for use with absolute altimeters, glide path and blind landing markers, airport traffic control apparatus, and other radio and electric circuits and controls.—AVIATION, *Nov.*, '43.

Where are Those Dividends?

(*Continued from page* 190)

which have long been found desirable by conservative aircraft investors.

Curtiss-Wright has a Class "A" stock issue outstanding which comes in for a preferred rating. This stock was issued to the extent of 1,158,699 shares back in the late 1920's. Nominally entitled to a dividend of $2 per share annually, it was not until 1936 when the first payment was made—and then only 50c. per share. The same amount was paid during 1937, $1 in 1938, and the full $2 annually for 1939, 1940, and 1941. Thus far in 1943, $1.50 has been paid and it is fully expected that the remaining 50c. will be paid before the year is over. This issue is non-cumulative as to dividends and has suffered to a certain extent because of this condition.

Also mitigating against its early favor was the realization that it has no preference as to assets. Further, the Class "A" stock can receive more than $2 per share annually only after the same amount has been paid to the common stockholders, after which both classes of stock share equally. With 7,432,026 shares of common stock outstanding, this represents quite a hurdle.

Currently selling around $20 per share, the Class "A" stock of Curtiss-Wright affords a yield of 10 percent—as long as the full dividend rates are maintained.

Consolidated Vultee has a preferred stock issue outstanding. In a large measure this superseded the preferred originally issued by Vultee prior to the merger. Now outstanding in the amount of 216,729 shares, this preferred is cumulative as to dividends to the extent of $1.25 per share annually. This issue is also convertible into common at the rate of one and one-eighth shares common for each share preferred. Should the company elect to redeem this stock, it must pay $27.50 per share.

Currently operating in its favor is a strong sinking fund requirement which is designed to reduce the size of this issue over a period of years. Selling around $22 per share, this preferred affords a yield of better than 5 percent—assuming the full payment of the dividend in the future. Thus far these payments have been made when due. For 1942, this issue showed earnings of $66.29 per share.

Republic Aviation also has a preferred stock issue outstanding. However, this stock is closely held and is being rapidly retired.

Douglas Aircraft has shown a consistent dividend record but one completely lacking in liberality. Payments of $5 per share annually have been made


MODEL UHX—10,000 BTU

SIMPLE COMPACT EFFECTIVE HUNTER HEATERS

MODEL UH2—25,000 BTU

MODEL UH3—40,000 BTU



Burn any type of gasoline—from truck fuel to 100 octane!

Uses for Hunter Universal Gasoline Heaters are too widespread and varied to list completely, and are multiplied daily by the imagination and ingenuity of men who build, buy or command equipment for the service or supply of our armed forces, or essential civilian activities.

We build a variety of small, powerful units, each with a range of applications to which it is especially suited. YOUR heating problem may be one of these, or it may be one on which Hunter heating engineers can assist you in applying the extremely flexible basic units of Hunter Heaters to do exactly the job you need done. In either event, we shall be glad to furnish further information specific to your particular interests.

BULLETIN HB-3 ON REQUEST

HUNTER AND COMPANY

Aircraft Equipment

1550 E. 17th St.

CLEVELAND • OHIO


SIMPLICITY OF HUNTER HEATERS BROADENS USES

Engineers Aid Application of Universal Gasoline Burner to Armed Forces and Other Essential Services

FEATURES "SEALED-IN-STEEL" FLAME

CLEVELAND, OHIO—Growing demands for simple and efficient heating for mobile service units, portable housing elements and other special problems has resulted in the setting up of a special division of Hunter and Company of this city. The sub-division will work with designers, builders, purchasers or users of special equipment for the armed forces or for essential civilian services.

Success in the varied uses to which Hunter Heaters already have been applied resulted in this broadening of interest. This has been largely due to the extreme simplicity of the Hunter "Sealed-in-Steel" burner, the fact that it will "give out heat in a big way" from any type of gasoline, from truck fuel to 100 octane.



Flame Completely Sealed

The basic unit is a completely enclosed steel tubular burner, with highly effective areas of heat radiating fins. Atomizing, ignition and combustion take place within the welded steel chamber, the only opening being an exhaust, which can be piped to an outside vent. Hunter units for both heating and ventilation include small, powerful blowers, built into the compact heater casings. Heaters designed for operation from either battery or 110 volt current.

It would be impossible to list all of the uses to which the existing models can be put. Engineers with the armed forces and with companies building equipment are calling every day for applications hitherto undreamed of.

The basic principle is similar to the combustion of an automobile engine—just as simple, safe and sure. Models are made in 25-pound packages putting out 10,000 B.t.u. per hour or in larger models giving any amount of heat required. On heating problems in between or outside of the standard models, Hunter engineers stand ready to work with your engineers in fitting specific needs.

Requests for product information bulletin "HA-2" or for engineering data should be addressed to . . .

Hunter and Company, 1550 East 17th Street, Cleveland, Ohio.

(Advertisement)

for the period 1940 to 1943 inclusive. Prior to this period, $3 each was paid in 1939 and 1938. Going back a little further, this company disbursed 87½c. and 75c. per share for 1932 and 1933 respectively. Despite earnings of $30.29 per share in 1941, the indicated $5 was paid that year by the company. This is merely a reflection of the conservative policies of the company and shows how academic substantial earnings can be to stockholders in the aircraft industry.

Rewards from investing in the aircraft industry or any other new enterprise seldom come from dividend payments. It is the hope of material capital appreciation that leads investors to these groups. It is all a matter of timing. Those fortunate enough are able to participate in the capital growth of speculative enterprises long before their success is assured. The risks are great and many but the profits are large to the discerning.

The air transport industry is now passing through virtually the same cycle as that experienced by the aircraft industry in respect to possible dividend payments. The air carriers have, during the past few years, experienced outstanding earnings. The bulk of such profits, however, is being plowed back into the industry for future expansion and growth.

An outstanding example is that of Eastern Airlines. Despite earnings of about $12 per share since it was incorporated in 1938, Eastern has not declared a single dividend. According to its president, it may be inferred that disbursements in the immediate future are most unlikely.

The rest of the air transport industry can point to only token payments at irregular intervals.

It would be well for investors in both the aircraft and air transport industries to recognize the special circumstances surrounding dividend payment possibilities in these groups. By understanding the special conditions which are attached to growth industries, a more profitable investment approach may be made.

Design for Survival

(*Continued from page* 118)

Have the aircraft producers been guilty of stupid management to have built up such huge inventories? The answer can only be: Definitely not. They have simply been caught in the middle by circumstances beyond their control—caught between the need for vast overexpansion to do a job that had to be done, and the fact that present tax, renegotiation, and other laws, have prohibited the building up of any sizable amounts of working capital such as those being acquired in the automobile, steel, and other older industries.

It should not be inferred that the "preliminary design" seeks special favors or preferred positions in the matter of needed legislation, for no one knows better than the plane producers that those who seek such positions usually pay dearly for them. But contract renegotiation and termination are but two of the many problems which must be solved if America's No. 1 industry is to live more than a few weeks beyond the Axis' unconditional surrender. They are problems whose ultimate solution will depend upon Congressional action—action which can be guided by the industry which has so much at stake.

At the beginning of this war when the chips were down, the aircraft industry met the challenge with quantities of quality products. Today the chips are down again, this time calling for quantities of cooperation and quality of management to insure survival of an industry which is having an unparalleled part in speeding the enemy's unconditional surrender.

Engineers Made To Order

(*Continued from page* 169)

approached this acute problem by employing people from other industries who had been trained as civil, mechanical, or electrical engineers, and by instituting an orienting and training program to equip them for aircraft work.

An engineer enrolled in the orientation training group was first given an introduction to the various manuals, literature, and data used in aircraft. Following that, there was from three to four weeks training in aircraft drafting and engineering fundamentals. The engineer was then assigned to a design group where, step by step, he progressed from writing orders, making tracing changes, and drawing minor layouts to the more responsible assignments of layout design or engineering checking.

Results were highly successful. Vega was able to expand its engineering force from a nucleous of approximately sixty to three hundred in three or four months. Through this method of training, it was found that engineers from related industries could rapidly and effectively be oriented to the requirements peculiar to the aircraft industry.

However, that program was successful only because of the availability at that time of engineers from related industries. The training requirements now have changed greatly in view of the progressive unavailability of persons with even the basic background for engineering work.

(*Turn to page* 254)

IT IS THE *Duty*

OF MANAGEMENT TO


LOOK AHEAD

"It is an obligation for management to begin NOW to look ahead to the post-war years, when ability to produce at low cost will once more determine which plants are to survive. It is then that the plant that has been making full use of mechanical handling equipment will find that same equipment its sharpest-edged tool for cutting costs."

—Factory Management and Maintenance

● Yes, NOW is the time to plan low-cost, efficient output for your post-war product. For planned production can give you the efficient cost-cutting tool you will need. With *both* Lamson Dispatch Tubes and Lamson Conveyors at work in your plant, management, materials, men and machines all move efficiently and economically towards a planned result.

● Lamson Tubes furnish instant, unerring communication to every part of the plant—important papers, time tickets, blueprints, samples, inspection reports, small tools, are made available the minute they are needed. Lamson Conveyors keep materials moving with a minimum of handling and floor-space, setting up a steady pace for production and eliminating traffic in the aisles and pile-up around machines.



SEND FOR NEW BOOKLET

● How to increase output and cut unit costs with this system of planned production is told in our new booklet called, "Co-ordinated Control." It's full of valuable suggestions for projecting economical post-war production. Whatever your plans, be sure to send for a free copy of *"Co-ordinated Control."*

LAMSON CORPORATION

850-900 Lamson St., Syracuse 1, N. Y.

Makers of CONVEYORS and PNEUMATIC DISPATCH TUBES

In the early part of 1941, Vega, in cooperation with Lockheed Aircraft Corp. and California Institute of Technology, undertook an intensive training program designed to obtain for both companies highly qualified engineers capable of assuming responsible engineering and supervisory positions. The program consisted of an eight-week full-time course of instruction at Cal. Tech. in such subjects as aerodynamics, structures, strength of materials, mechanical design, and aircraft manufacturing methods. All students were paid regular engineering salaries by Vega and Lockheed.

Following this college session, the students were given a further intensive eight-week full-time training term in the Lockheed and Vega factories. This included actual experience in the solution of complex design problems on aircraft then on drafting boards. In addition, a series of lectures was presented by regular engineers on tool design, manufacturing, layout, materials, and structures. Upon the completion of the four months' program, the men were assigned to various jobs in the design engineering and manufacturing engineering departments of Lockheed and Vega.

This program resulted in the procurement for Lockheed and Vega of a large group of highly qualified engineers from other industries who might not have been induced to enter aircraft had it not been for such a training program. And this training tended to increase their confidence in their ability to step into a new field and carry out an assignment successfully.

Federal Assistance

Another type of training program was instituted early in 1941 when Federal funds were made available for short, part time, intensive courses to improve the skill and ability of persons working in the aircraft industry. The first attempt of Vega engineering to utilize such training facilities was through the University of California.

These courses consisted of highly specialized subjects directly related to the assignments carried on by students in their everyday jobs. For example, power plant design, aircraft structures, hydraulics, fluid mechanics, aerodynamics, stress analysis, and production design. A course was generally completed in 12 to 16 weeks, with classes meeting for two or three hours two evenings a week. They were considered quite successful in that they provided opportunities for employees of the engineering branch to improve their knowledge and skill by outside study. A large number of employees took advantage of these opportunities, and there is no question that many occupy key positions today largely as a result of this training.

In the latter part of 1941 and early in 1942, Vega continued to expand its engineering activities. At that time a rather acute shortage of experienced engineers, not only in aircraft but in related industries, became apparent. Coupled with this condition was the increasing problem of obtaining draft deferments for younger men.

Foreseeing the possibility of serious demands by the military forces for all available young men, Vega engineering branch undertook to encourage the training and employment of women in engineering positions other than the purely clerical and stenographic. In cooperation with the University of California at Los Angeles, Vega established a full time training program for draftswomen.

The University undertook this program after the company had guaranteed to employ a minimum of fifteen who completed the course. This guarantee was given in order to offer some incentive for those qualified to enroll. As a result, Vega obtained several women technical employees who are now occupying relatively responsible positions.

Late in the summer of 1942, Vega expanded its training activities. Several full time paid engineering training programs were established in conjunction with the University of California and the California Institute of Technology. Basic requirement for enrollment was draft exemption by reason of sex, age, dependents, or physical disability.

The first such program was organized in Santa Barbara, where seventeen men and women were accepted for a full twelve-week course. Later, other courses were instituted at Westwood, Los Angeles, Burbank, and Pasadena.


Through these full time paid training programs, Vega was able to expand its engineering organization quantity-wise approximately 100 percent in less than a year. Such an expansion involving relatively inexperienced persons created a pressing problem in that many occupations requiring high technical skill and ability were, of necessity, being performed by persons lacking proper qualifications. As a result, the load on supervisers became excessive.

To meet this problem, further paid training programs were undertaken. For instance, to develop qualified layout design draftsmen, night courses were established in which students attended one three-hour class each week for ten to twelve weeks. They were paid at established overtime rates. This initial program was considered such a success that other courses were established, and new ones are now being planned.

As the need for training courses has

3 Electrical Huskies

to handle every light and power job

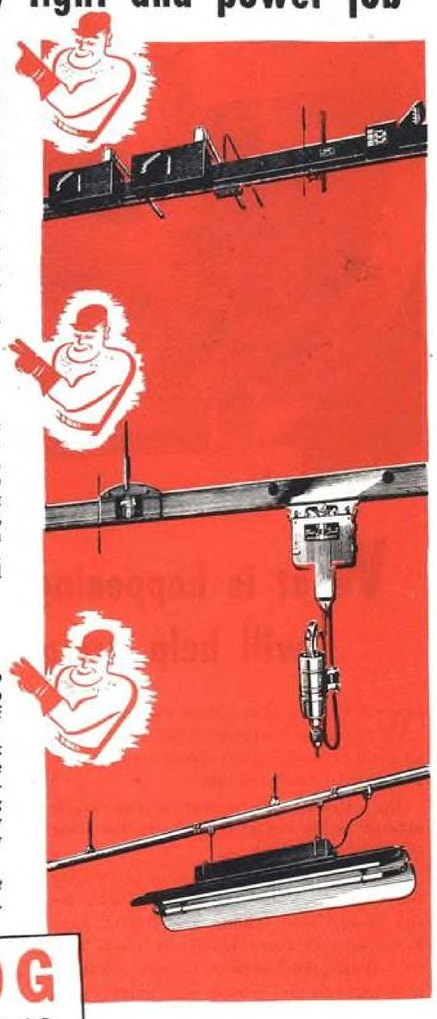

BUStribution DUCT for Flexible Power

Built in standard, interchangeable 10-foot sections, BullDog BUStribution DUCT provides *complete flexibility* for power and lighting circuits — enables you to change production lines at will—rearrange whole departments without interrupting production elsewhere.

BUStribution DUCT is an integral part of the machines it serves. It is quickly and easily installed—100% salvable.

(Conforms fully with WLB Limitation Order L-273)

INDUSTRIAL TROL-E-DUCT for Feeding Portable Tools

With Industrial Trol-E-Duct, the source of power moves along with the tool—cutting operating cost, eliminating interruptions due to fixed plug-in points, increasing both safety and productive time, and making extensive savings in wiring and other fixed equipment.

A fully descriptive bulletin will be sent on request.

UNIVERSAL TROL-E-DUCT for Flexible Lighting

What Industrial Trol-E-Duct is to power, Universal Trol-E-Duct is to lighting — a flexible system of quickly *movable outlets.*

Universal Trol-E-Duct puts light where it belongs — close to the work. It enables you to meet instantly any change in your lighting set-up or requirements, simply by moving lights along the duct or by adding new lights where needed.

Ask for full information about these and other BullDog products.

BULLDOG

ELECTRIC PRODUCTS CO.


Box 177, R. Pk. Annex
Detroit 32, Michigan

BullDog Electric Products of Canada, Ltd., Toronto, Ontario

Field Engineering Offices in All Principal Cities

MANUFACTURERS OF a complete line of Vacu-Break Safety Switches, Panelboards, Switchboards, Circuit Master Breakers and BUStribution SYSTEMS.

You SAVE What You SPEND for WAR BONDS

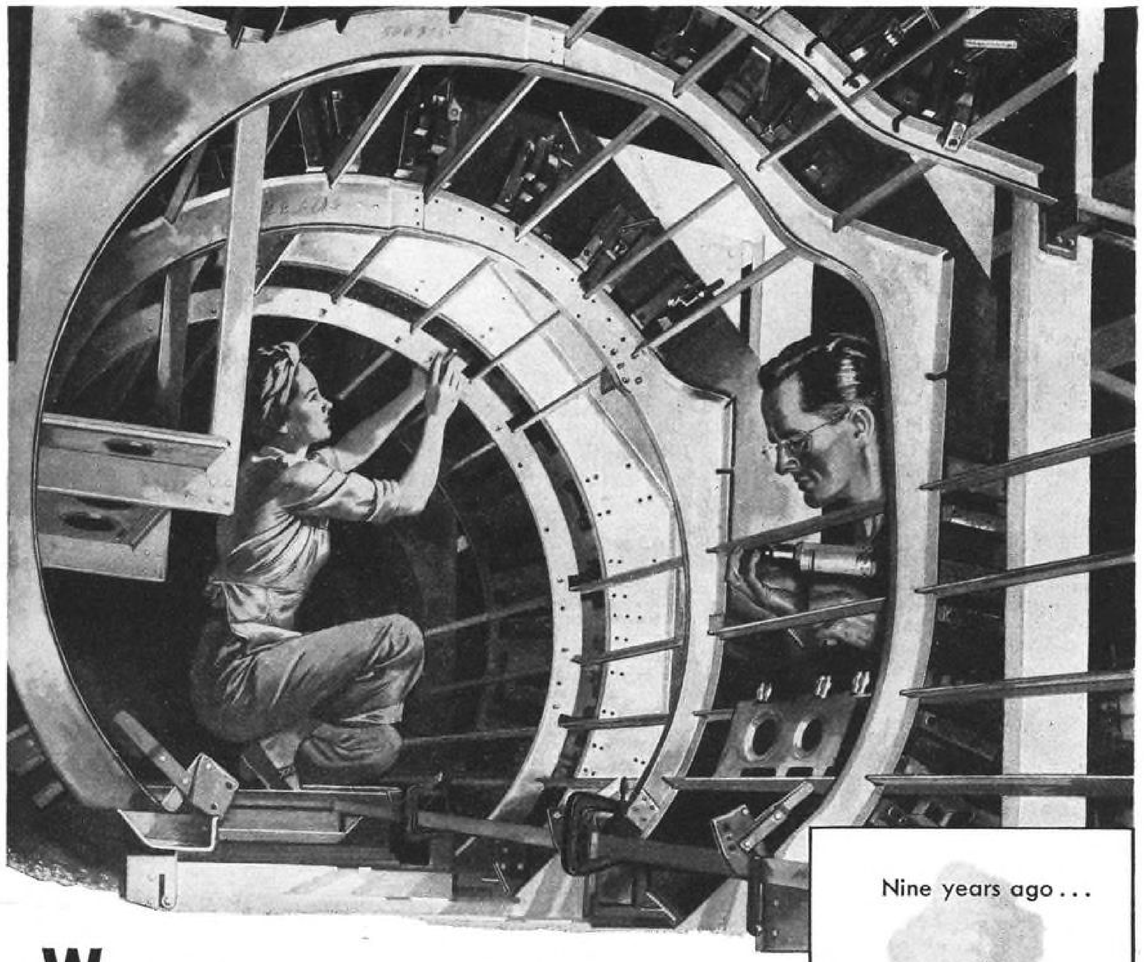

What is happening at Northrop today will help bring Victory sooner

'WAY BACK IN 1930...there was an airplane called the Northrop "Alpha"... the first all-metal stressed-skin monoplane to embody the multicellular wing structure.

The "Alpha" is important to America. It ushered in the era of the modern low wing all-metal monoplane.

Thereafter, the Northrop group created the Northrop "Gamma"—first airplane with the now-familiar split trailing edge landing flaps. Faster, even more aerodynamically "clean" than the "Alpha", the Northrop "Gamma" set transcontinental air-mail records. With military modification, *the "Gamma" became the world's first airplane to be used as an attack bomber.*

This same Northrop group then built *the Northrop 3A—pioneer pursuit plane flying over 300 miles per hour.*

Later, the group designed and built the N3-PB patrol bomber—still the swiftest military seaplane fighting on any front.

Such are some of the past achievements of the Northrop group—and that same group of Northrop talents is hard at work for America today. What is happening at Northrop cannot be fully discussed right now . . . but you may be confident of this:

Northrop aerodynamicists, production engineers and airplane-building craftsmen are turning out in production quantities new Northrop warplanes to carry on the tradition.

What can one individual do? Warplanes hatch from War Bonds. Buy more War Bonds every payday!

Nine years ago...



In 1934, the Northrop group designed and built the Northrop 3A, pioneer of fighters flying over 300 miles an hour. To this low wing pursuit with its clean lines, retractable landing gear, and split trailing edge landing flaps may be traced the ancestry of many of today's fighters.

NORTHROP *Aircraft, Inc.*

NORTHROP FIELD, HAWTHORNE, CALIFORNIA

MEMBER AIRCRAFT WAR PRODUCTION COUNCIL, INC

arisen. Vega has met it with planned programs with long-range objectives. The newest full-time 52-wk. alternate training-and-work program in aircraft engineering fundamentals has been instituted to teach 40 selected members of the engineering branch to handle responsible technical and supervisory assignments.

In planning specialized training, the engineering branch made a careful analysis of requisite engineering subjects of college level. Consultations were held with representatives of California Institute of Technology on selection of courses that would offer a sound, practical understanding of engineering. Subjects chosen were condensed and pared to essentials.

At the start of the program, hydraulics was omitted, but after training was under way it was found that a condensed course was needed to round out the program. The addition of a basic, simplified course in electricity is being considered at the present time

It is still too early for positive results, but Vega is confident that this type of training is a step in the right direction. At the end of the 52 weeks of the present course the engineering branch expects to have an additional nucleus of trained people whose understanding of engineering will be such that they can competently fill jobs requiring greater technical knowledge.


Engine Control Simplifies Piloting

(*Continued from page* 134)

RB and *TB*. The throttle control lever may be installed at either end of this shaft. Here, it is on the rear side of the unit, as can be seen from the portion of the lever visible above the housing. Shaft *B* of Fig. 2b may be seen below and to the right of shaft *A* in Fig. 4.

The lever at the left of Fig. 3 is for the mixture control. An added feature of this type of control is that it also automatically moves the mixture control from the "automatic lean" position to the "automatic rich" position when the manifold pressure is increased above the maximum value for cruising. This provision was made by attaching a cam to the mixture control shaft and operating this cam by means of a lever on shaft *A*. This lever and cam can be seen in Fig. 4, which shows the reverse side of the unit in Fig. 3. (It should be noted that there is no pin connection between this cam and its operating lever to the *T* link behind and to the left of the cam.)

Bosses for the shaft and servo piston connected to link *T* can be seen extending horizontally to the right behind the mixture control cam. Note that the

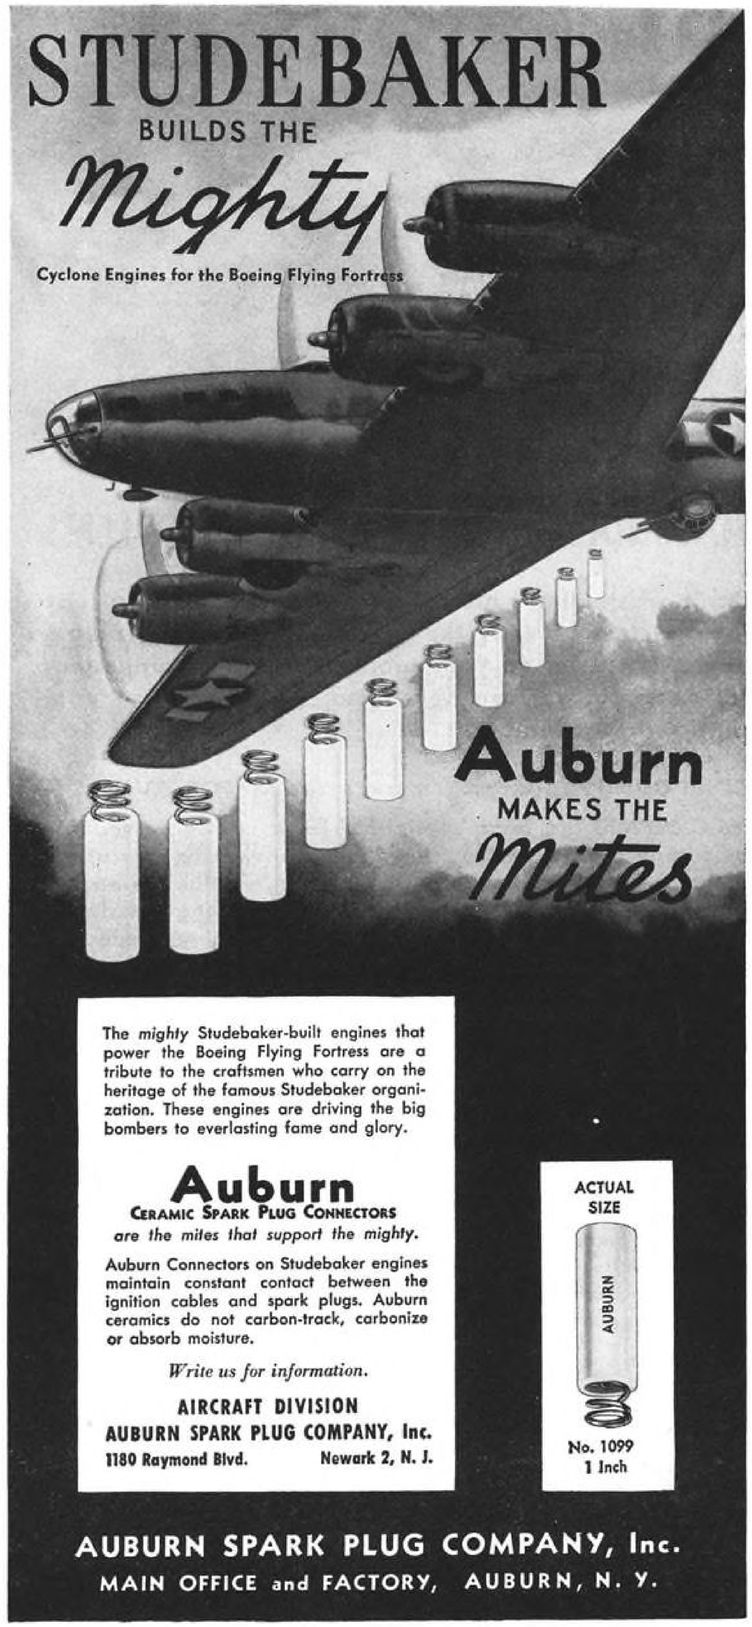

SUPERIOR!



COMPOUNDS DEVELOPED FOR INDIVIDUAL CLEANING PROBLEMS

Don't waste time, money and valuable materials by taking chances with the pre-finishing or pre-coating operations used on your products. . . Use compounds for cleaning that are developed *individually* for your particular problem.

COMPOUNDS *Especially Developed* FOR AVIATION

MAC DERMID Inc. have specialized for over twenty years in perfecting compounds for cleaning, in answer to the current demand, as determined by the metals available and the methods being used. This *specialized* compounding has always been recognized as of utmost importance where speed and accuracy were paramount. . . Today, MAC DERMID Inc. have a complete line of compounds *individually formulated* for *specific cleaning problems* faced by aircraft and engine manufacturers—guaranteed to produce superior results, speed-up production and reduce overall cleaning costs.

Write for Free Folders

Free folders and Data Sheets are now available illustrating the many new MAC DERMID Inc. compounds developed for specific cleaning procedures. Write, today, for your copies—state your product, cleaning facilities and method of finishing or plating.



MAC DERMID
INCORPORATED
WATERBURY, CONNECTICUT
SALES AND SERVICE FROM COAST TO COAST
Los Angeles · St. Louis · Toronto, Canada · Chicago · New York · Cleveland · Detroit

throttle lever is in the closed position and that a recess is cut in the mixture control cam so that the mixture control lever may be moved manually to the idle cut-off position. This arrangement relieves the pilot of the task of adjusting his mixture control to give lean mixtures in the cruising range whenever his manifold pressure will permit such operation, and it makes certain that adequately rich mixtures are provided if he must suddenly open his throttle from the cruising to the high power range.

The small lever at the top center of Fig. 4 is to provide an over-ride control for emergencies in which greater than normal takeoff manifold pressures are required. It vents the capsule chamber to the atmosphere so that the control will regulate to the higher manifold pressure.

Advanced Auto-Control Units

Successful application of automatic control units to the throttle and mixture controls leads to consideration of how the ideal goal of a single-engine control lever in the cockpit might be achieved. Perhaps the next most important item is the propeller governor control. An additional cam could be easily provided on shaft *A* (Fig. 2b). It could be used to operate an additional lever on a hollow shaft concentric with and riding on shaft *B*. A lever at the end of this hollow shaft could be connected to the propeller governor. The cams could be contoured to cause the engine to operate along a propeller load.


If it were desired, the cam could be designed to make the power follow a constant manifold pressure curve for the cruising power portion of the range. The mixture control lever could be used to select whichever of the two curves were desired, or any of a series of curves intermediate between the two.

Fig. 5 shows the relation between horsepower and rpm. which would result for this type of unit, as well as the type of specific fuel consumption curves which might be expected. Note the important reduction in fuel consumption which the latter curves show for constant manifold pressure operation in the cruising range.

A supercharger gear shift control designed to meet the requirements of the engine could be incorporated in the main automatic control.

Although both the maximum power and the minimum specific fuel consumption characteristics of an engine can be improved considerably by using a variable spark advance, the complexity and inherent error of mechanisms heretofore available have been such that virtually all American aircraft engines have employed a constant spark advance. Fig. 6 shows a typical curve for

(*Turn to page* 299)

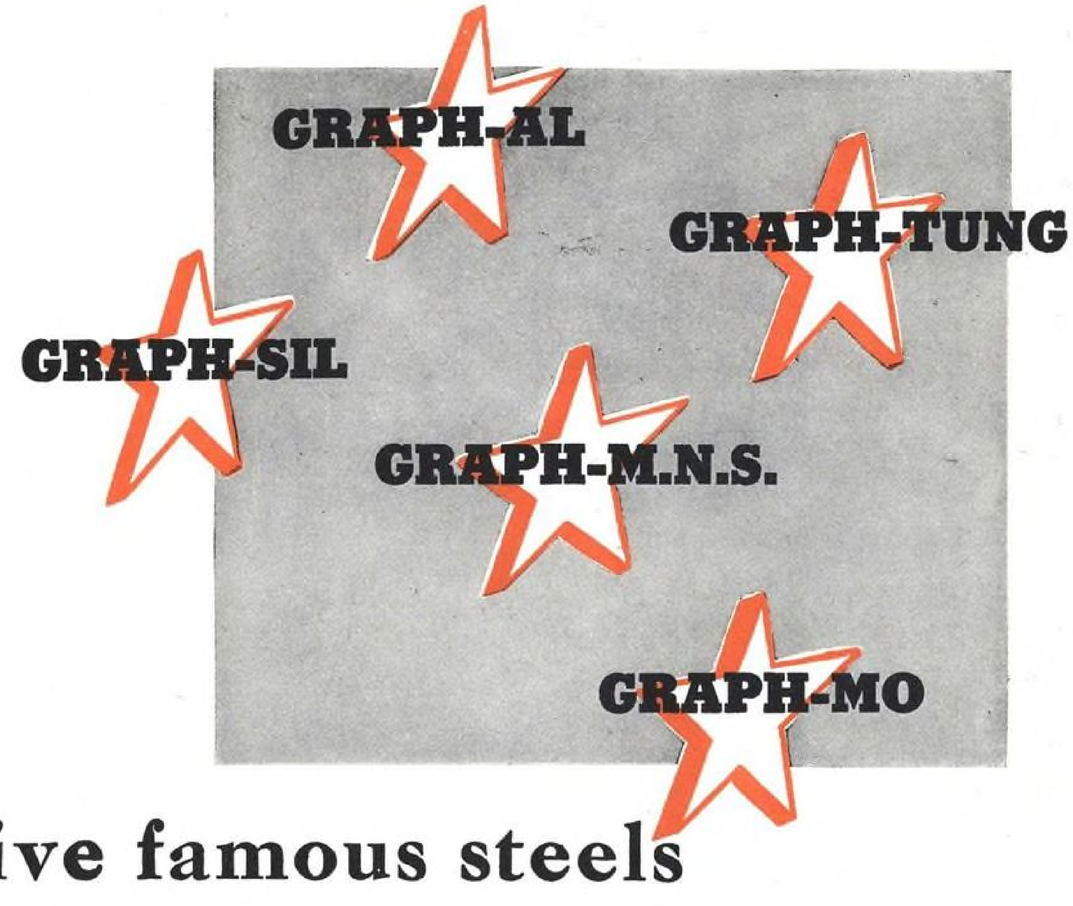


five famous steels

The five Timken Graphitic Steels — Graph-Al, Graph-Sil, Graph-Tung, Graph-M.N.S., and Graph-Mo — offer *faster machining, exceptional resistance to wear and less tendency to score work.* These qualities, plus their uniform structure, high physical and excellent heat treating properties, combine to make them truly exceptional. Because each steel has been designed to do a specific job, it will pay you to investigate the possibilities of one or more of these "famous five". A Timken metallurgist will be glad to consult with you. Steel and Tube Division. The Timken Roller Bearing Company, Canton, Ohio.

Write for your free copy of "Graphitic Steel", 48-page prospectus now in new 8th Edition. Contains complete information. Fully illustrated; 40,000 copies printed to date.

TIMKEN
TRADE-MARK REG. U. S. PAT. OFF.
GRAPHITIC STEELS
for faster machining-longer wear

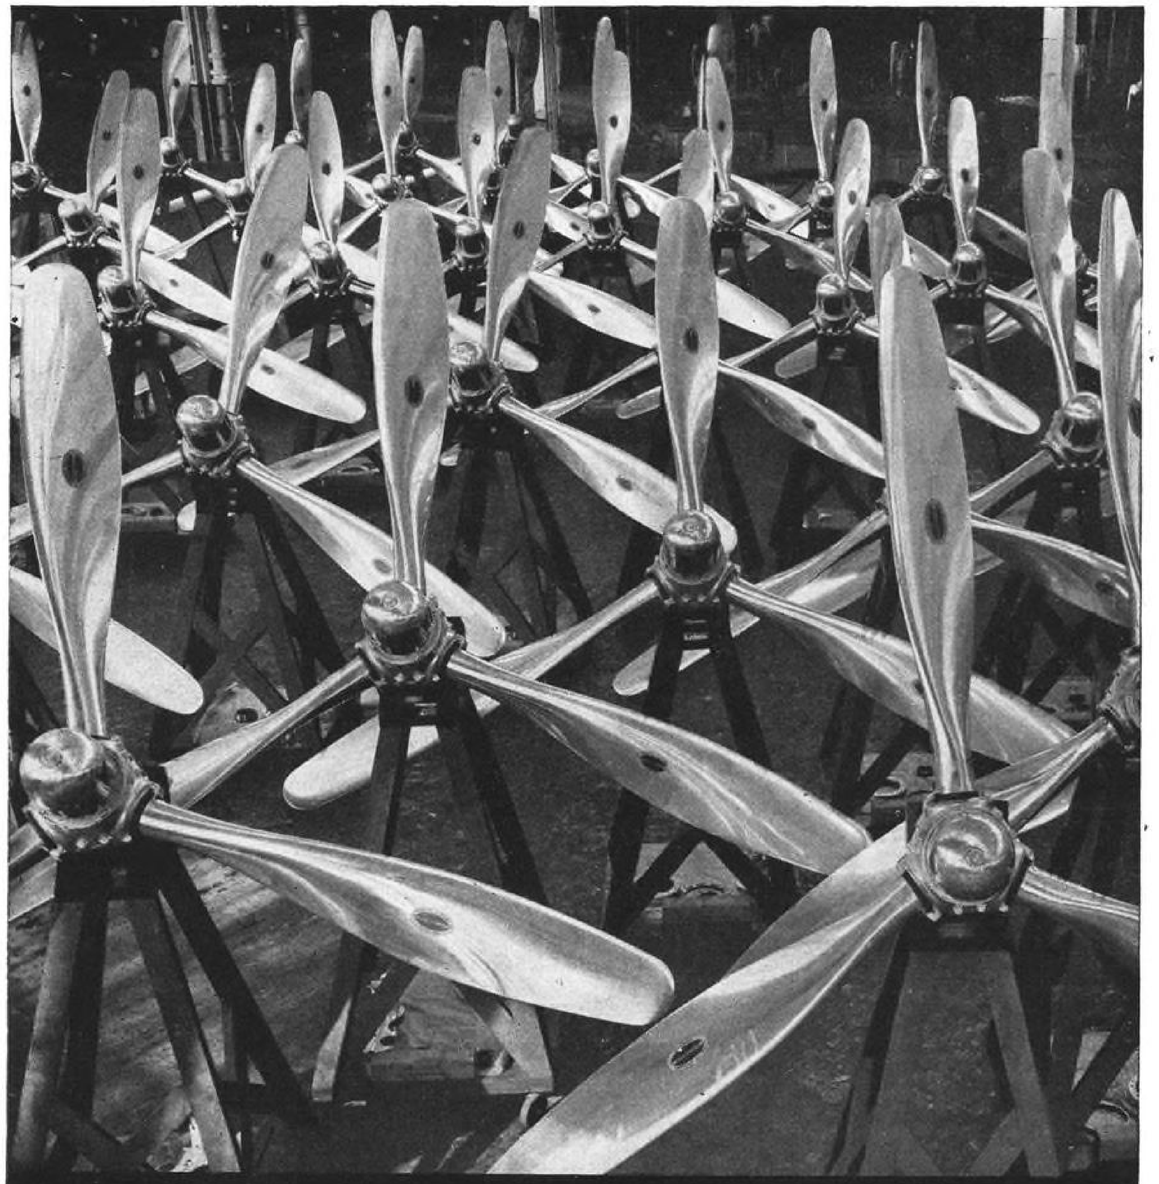

To NASH-KELVINATOR
"For Excellence in Production"

The management and employees of Nash-Kelvinator Corporation have done a magnificent job in producing propellers. To them we extend our sincere congratulations for having received the Army-Navy "E" Award.

Their production of Hamilton Standard propellers, added to our own output and that of our other licensees, forms an overpowering production total. Here is a concrete example of American teamwork that assures ultimate victory.

HAMILTON STANDARD PROPELLERS
EAST HARTFORD, CONNECTICUT
ONE OF THE FOUR DIVISIONS OF UNITED AIRCRAFT CORPORATION

The AVIATION NEWS

BLAINE STUBBLEFIELD, Washington HERB POWELL, New York

Nazis May Not Have a Good Defensive Roof, But Their Air Force Has Plenty of Fighters

Washington (AVIATION Bureau)—President Roosevelt summed up the air war recently when he said that Hitler had neglected to put a roof on his European fortress. Total combat airplanes so far put into action by the AAF against the Nazis cannot be printed, but it is surprisingly small compared with US industry's output. Thus, the major weight of Allied airpower has yet to be brought against the enemy.

The Luftwaffe no longer hopes to take the initiative, nor will it try. Goering stopped producing bombers last December. But German fighters of good quality are coming out in such large numbers that they are inflicting heavy losses, especially upon US day attackers. All of the facts concerning AAF bombings cannot be published. One day recently Allied airmen put down 152 Nazi planes, but those days are few and far between.

Nevertheless, the Nazis are being mortally hurt from overhead, as indicated by their agonized squawks over short-wave radio. Still Air Force officers fret because they have actually knocked out very few Reich vital points, yet they believe that Allied air punishment may possibly break the Germans down unexpectedly. As near as one can interpret the off-record opinions of returned observers, Allied intentions are to spend the winter battering German production and morale in preparation for new invasions in the spring.

Under Secretary of War Patterson says that since July, German plane losses have been greater than production. Army Intelligence officers report that the Luftwaffe is stronger now than it was in 1939. These seemingly contradictory statements could both be true. The sum of it is that Germany recently had 5,000 planes on the line and 5,000 in reserve. But the shift from bombers to fighters makes more units, so the total might now be greater. Unfortunately, one enemy fighter can destroy a vastly more costly heavy bomber.

It is true that time plays into the hands of German fighter producers, but every week of Allied advance in Italy brings more Nazi objectives within bombing range.

Some American *Liberator* squadrons, transferred from England to North Africa, may be the forerunners of a heavy force which will use the fair Mediterranean weather for a winter campaign into Southern Germany and her Balkan lands which have hitherto been beyond reach. Recent shuttle raids by bombers passing between England and the Mediterranean bases may be significant too.

Unofficial but persistent opinion from London says that after a period of maximum Allied bombing invasion may not need to be the bloody conflict usually envisioned.

Results of strategic air attack (independent air war) are hard to calculate, but there is little doubt about the work of tactical aviation. Gen. H. H. Arnold, Chief of AAF, said Salerno could not have been taken without air assistance. Allied squadrons raked the ground so thoroughly that the heaviest Nazi counterattacks were thrown back with much less than expected losses. If AAF and RAF can keep superiority over German fighter defenses, it will make a world of difference when Allied land forces tackle the Huns on their own ground.

President Roosevelt, greatly pleased with the capture of Foggia and Naples and the advance on Rome, said that we face a hard fight up through Italy; that overwhelming forces must be accumulated in Britain; that the Japs hold a strong line from the Kuriles thousands of miles south to Malay, Burma and China, and that we will have to hit them hard at many points.

The Japs, like the Germans, are shifting to production of defensive fighters because they are consistently beaten by the Allies in the air in such defeats as those at Lae and Finschafen, both of which were serious. At Wewak our forces destroyed about 60 Jap planes in one day, with losses reported to be small.



CATERPILLAR NO. 1

Country's first Army pilot to save his life via parachute—thus becoming No. 1 member of Caterpillar Club—Col. Harold R. Harris receives Switlik Trophy commemorating jump on Oct. 20, 1922, at Dayton, Ohio, during days he was chief of McCook Field flying section. Left to right, Harold L. Foster, Caterpillar Club president; Col. Harris; and Stanley Switlik, of Switlik Parachute Co.

War Department Gives Out Some Uncomfortable Facts

Washington (AVIATION Bureau)—For months warplanes have been number one on the Army's weapon priority list. Experience at the front now puts them "first, second and third."

For that reason—and because of the manpower bottleneck on the West Coast—the War Department last month called a "conference of industry, labor and the press" to bolster fighting spirit among plant managements. Nearly all aircraft production presidents attended the meetings in the Capital.

The gist of what they heard was that the Nazis are retreating, but they are concentrating their forces in smaller areas, which makes them stronger. Last December they stopped production of bombers entirely and moved over to defensive fighters. As a result they have fighter superiority over some Allied targets in Europe.

To beat down fighter resistance and soften Europe for invasion, the Army wants (1) more and more heavy bombers; (2) rapid progress toward full production of the B-29 super-bomber; (3) large numbers of long-range fighters; (4) faster training of bomber crews.

The manufacturers were shown motion pictures of tremendous Allied losses of materials; they were told of heavy aviation losses, the nature of which cannot be published lest it help the enemy. A grimly realistic sham battle was staged for them at Fort Belvoir, a few miles from Mount Vernon, Va.

There are about 250 vital objectives, cities, transport centers, harbors, air bases, etc., in Germany which must be bombed out. So far we have crippled perhaps 25 of them, and completely knocked out much fewer than that.

Some manufacturers told the Army it should put the show and the conference on tour so it could be seen by workers who are not doing their best and by labor leaders who are "dragging their feet."

Manpower, Design Changes Slow Production, But Efficiency Pushes Plane Rate Near 8,000

Washington (AVIATION Bureau)—Manpower shortage and design changes are still primary limiting factors on warplane production. There has been no major material shortage reported to the War Production Board for many weeks.

With aircraft spearheading the war on all fronts, Army and Navy took the West Coast manpower shortage most seriously and went to the President for a remedy. Result was that James F. Byrnes, first assistant to Mr. Roosevelt and Director of War Mobilization, directed the promulgation of the West Coast Manpower Program, which aims to let WPB schedule aircraft production on the basis of labor availability as directed by the War Manpower Commission. This is done through "area of production" and "priority" committees. Eight federal agencies are involved, and the industry finds itself under a changed and complicated method of dealing with the government.

WPB officials admit that labor does not like the plan because unions fear a heavy shift of workers to aviation from other industries they have organized. They fear that high-rated jobs will be scaled down. The Coast doesn't like it because it is felt that many non-aircraft war contracts will be canceled to release more workers. Some have already been terminated. Management dislikes the closer relationship with WMC.

Practically nobody likes the Byrnes plan. But so long as the administration thinks it will work, all express willingness to abide by it.

Shortly after this plan was promulgated, the East and West Coast Aircraft Production Councils met in Washington and agreed that teeth should be put into the War Manpower Commission's "job release" regulations, so as to curtail labor turnover, which in some plants is at the rate of 100 percent per year; that draft of experienced men from aircraft should be stopped; that the Army should release key aircraft men already drafted. No mention was made in the council's official resolution on the Byrnes plan.

Aircraft production has been running around 7,600 per month for four months, whereas the Army-Navy-WPB schedule calls for a rate in excess of 8,000 by now. WPB officials still hope we will build 90,000 planes in 1943, but authorities in the industry estimate 80,000 to 85,000. The 1944 quota is 115,000, which will be more than half of the entire war production program; the industry is pledged to meet it, but doesn't know just how it's going to do it.

The industry feels that it is unjustly accused of inefficient use of manpower. Donald Douglas, speaking for Coast producers, said that in the first seven months of this year when employment increased only 4.4 percent, production of planes increased 44 percent. In other words, in July every aircraft worker was turning out what it took two workers to produce last January—a 100 percent increase in six months. Mr. Douglas quoted figures from other aircraft companies showing an efficiency improvement of many hundred percent since 1940.

He denied also that the cost-plus-fixed-fee type of contract makes inefficiency profitable. He pointed out that the fee does not rise as costs increase. On the other hand, he said, disallowances by government auditors increase as costs increase.

The industry also denies that it is hoarding labor. It is explained that irregular deliveries from sub-contractors and unavoidable dis-balances in production, due to design changes and other causes, are bound to lay off sections and crews, which it would be folly to discharge.

Not much of anything can be done to alleviate the burden of design changes. Total losses due to these changes approach 1,000 planes per month. However, those planes delivered are much more effective at the front. Some models have been so radically redesigned that the enemy at first failed to recognize them at all.

It is true that the armed services are reducing the number of types. But offsetting this are the increasing complications of existing models and the constant demand for introduction of new ones.

There will be a new crop of design changes when we go after Japan.

Chamber Offers Services On Postwar Problems

"The continued welfare of the US in attaining victory in this war and in keeping the fruits of victory in the future depends in large part upon the maintenance of a strong air arm backed by a sound aircraft manufacturing industry."

This platform was recommended to the Aeronautical Chamber of Commerce after a three-day meeting of its economic development committee in Colorado Springs.

Other recommendations, announced by chairman S. W. Voorhes, of Lockheed, were legislation and declaration of national policy on contract terminations "with the objective of tapering off war production with the least possible shock to the national economy"; cooperation with the government in postwar plant disposal; and dissemination of data on all problems affecting the industry for the information of Congress and member companies. The committee also recommended offering of the services of chamber technical and industrial organizations in postwar disposal of warplanes.

An executive committee of 15 was established within the Economic Development group with Voorhes as chairman. It was not said what the work of the new committee would be.

TWA Names Writing, Photographic Winners

TWA's sixth annual aviation writing and photographic winners this year are: Robert S. Ball, Detroit *News*, first place in the open newspaper division; Scholer Bangs, formerly with the L.A. *Examiner*, second place for his work on that paper. He is now West Coast editor of *Air Transport* and *Aviation News*. R. M. Cleveland of the New York *Times* won third place.

Alexander McSurely, former aviation editor of the Dayton, Ohio, *Journal-Herald*, won first place in the newspaper division of under 100,000 circulation. He is now with McGraw-Hill's AVIATION, *Aviation News*, and *Air Transport* group. Nick Moser of the Reading, Pa., *Eagle-Times* placed second; Helen Waterhouse of the Akron, Ohio, *Beacon-Journal*, third in the Under 100,000 Class.

In the magazine division, Max Karant, managing editor of *Flying* won first place; E. J. Foley of *American Aviation*, second; and Selig Altschul of *Barron's*, third. The photographic awards were won by William W. Dyviniak, staff photographer for the Buffalo, N. Y., *Courier-Express*, first place; W. E. Loeber of the Pittsburgh *Sun Telegraph*, second; and Robert Seelig of the New York *News*, third, his second award in this class.



BRISTLY GOATEE

New punch added to Flying Fortress chin is a turret with two .50 caliber guns which Wright Field has called "the finest arm of its kind in the world." This gun, says one arms engineer, "is capable of firing 850 shots per min. and weighs about 65 lb. The projectile, leaving the muzzle at a speed of more than 3,000 ft. per sec., is capable of penetrating any and all parts of an airplane, including the engine itself." (Wide World photo.)

★ MILITARY MEMOS ★

The distance between opponents in the race of offense and defense is narrowing again. Although Col. Samuel Anderson, chief of the *Marauder* force in Britain, reports that coastal bombing has forced Nazi fighters to move further inland on the Continent, the *Luftwaffe* is still uncomfortably strong. In raids, AAF B-17's and P-47's were knocking down 100 or more Nazis—but losing 30 or more planes themselves, a potent footnote to the government's complaint that production is still not high enough.

One reason for the losses was the as yet not fully described enemy rocket propelled weapon. It struck one *Fortress* with a 10-lb. piece of metal 4 in. thick and 14 in. long.

"Fortresses" themselves were being improved. Bomb loads have been increased, and on a 600-mi. roundtrip to Emden, on which they were escorted by P-47's, they carried about 4 tons each. Here precision bombing was discarded in favor of the British saturation tactic.

"Chin" turret (see photo) with two .50 caliber guns was also being installed on B-17. Describing bombing formations which he said were led by *"Fortresses* which carry no bombs but are equipped with 30 super-heavy machine guns and many cannon," a wide-eyed German war reporter was said to have calculated that in larger formations "more than 1,000 US airmen, covered by armored planes, are defending themselves with more than 3,000 machine guns and cannon." This piece of arithmetic seemed to be substantiated more by awe than by accuracy—and soothing propaganda.

Adaptation of P-47's for 300 mi. raids, such as the one on Emden, indicated that the high command does not regard our own gunpower as highly. Or, in other words, German defenses were stiffening mightily.

The Nazis, however, were unable to pin ex-movie love maker Capt. Clark Gable's ears back. **Leaving his gun,** he started back to this country on a new assignment decorated with the Air Medal "for exceptionally meritorious achievement in five separate bomber combat missions."

Weight of bombs dropped per minute by RAF has increased from 17½ to over 50 long tons in past 16 months. "The havoc wrought is indescribable," Winston Churchill told Commons.

Invasion of Italy "would have been easier with more planes," says AAF Commander Arnold.

Camera Proves It

American aviators will be able to confirm victories by means of a gun-sight aiming-point camera which photographs on movie film everything within the gunner's range while the gun is firing. Installed in many fighter and bomber planes, it weighs 2 lb., measures 4 by 6 in., and costs $290. Camera has its own motor and holds 50 ft. of 66 mm. film.

Army credits Corp. Fred Behm, instructor in armament at the Yale AAF Training Command School, for the development.

"It could not have been done with less."

Maj. Gen. Claire L. Chennault, commander of Fourteenth (China) Air Force reports that Jap air strength at Haipong, Canton, and Hong Kong has increased 200 to 300 percent in the past month. "Their planes have improved in performance this year. The crews give every evidence of being well and carefully trained. They show the greatest courage in combat. The easiest way to defeat the Japanese is from China bases."

In three years, firepower of Navy planes has increased five times and battleship anti-aircraft 100 times, according to Assistant Navy Secretary Stevenson.

Maps of enemy defenses have already been prepared from the air for the men who will soon invade the Continent.

War Dept., says Gen. Arnold, in announcing easing of the 24-hr. air warning service, "is assuming the calculated risk that the small-scale air attack of which the enemy is now capable may meet with some measure of success."

★ SPOT CHECKING ★

In the Services: New Chief of Navy's Bureau of Aeronautics is Rear Adm. DeWitt C. Ramsey . . . Succeeding Maj. Gen. Ralph Royce as commander of First Air Force is Brig. Gen. Frank Hunter, World War I ace and first air commander to put a P-47 in action. . . . Col. Edward J. Timberlake, Jr., who led a **Liberator** group in the Ploesti oil field raid, has been made a brigadier general. . . . Distinguished Flying Cross "for extraordinary achievement in aerial flight" has been given Maj. Gen. Claire L. Chennault. . . . Col. James G. Hall is now chief of reconnaisance branch in the office of the assistant chief of air staff for operations. . . . Maj. Gen. Davenport Johnson is commanding 11th Air Force in Alaskan area.

By 1950, 500,000 planes will be crossing American skies, in opinion of William A. M. Burden, special aviation assistant to Secretary of Commerce. There will be 441,000 private, 50,000 military, and 9,000 transport, he ventures.

Intrastate service over five routes within New Jersey has been proposed by Otto Aviation Corp.

Grover Loening, WPB consultant, applies some political theory to arguments over postwar routes: "In the domestic and international field we cannot have a monopoly because we are a democracy—because it is against the very things we are fighting for."

"Monopolistic control of U. S. international air services is not favorable to prompt and progressive aviation development in the public interest," says a report submitted to the directors of the Chamber of Commerce of the US.

New Battleship Trend?

The famous Battleship X, the new *South Dakota* which beat off scores of Jap planes and shot down 32 of them, was bristling with many more than the usual number of anti-aircraft guns and carried special armor. Her success against aircraft has given rise to authoritative suggestions that battleships could be converted from big sea gun platforms to anti-aircraft fortresses with hundreds of guns. These would throw steel so thick that few if any attacking aircraft could penetrate it. Such ships would accompany and defend aircraft carriers.

But this possibility ends like all military schemes: The enemy can do it, too.

Canadian Notes

By James Montagnes

Establishment of landing facilities in communities across Canada is the first step in postwar air planning undertaken by the Aeronautical Institute of Canada, President C. R. Patterson stated recently at Toronto. "Safer planes for private owners will open up new sources of employment," he said. "There will be local flight-training schools, air taxis, sales, and repair services, flying ambulances, and fishing and hunting trips by air. Fresh fruits, fish, and other perishables will move by air. All first class mail will be airborne. A large proportion of the 300,000 men and women under 30 in the Royal Canadian Air Force and Canadian aircraft industry will want to remain in the industry when the war is concluded."

Development of a chain of airfields in northwestern Canada, from the United States boundary to Alaska, has reduced the need for floats and ski landing gears. Wheels can now be used the year round on many of the war-emergency fields hacked out of the bush on the northern routes. The seasonal change-over from floats to skis is becoming a thing of the past. Only on routes off the main wartime airways do operators still have to make lake-landings summer and winter. Wartime cargo demands required the building of airports since floats and skis reduce payloads.

Broken plastic airplane windows are being used in the RCAF to make medical and dental equipment formerly formed from steel and brass. Capt. Joseph Freeman, RCAF dental officer, and Warrant Officer Wilbert Mitchell, RCAF dental technician, have developed methods for using perspex window material in splints and in headcaps, necessary in plastic surgery to hold broken jaws.

New Trans-Canada Air Line services are planned between Montreal and Halifax and from Winnipeg to Edmonton. The government has earmarked $560,000 for the development of these two routes, with $200,000 to be spent on the Montreal-Halifax run for airport and radio facilities at Blissville. No date has been set for the commencement of operations of these routes.

Three new buildings are under construction at Stevenson Field, Winnipeg, by TCA, including a new brick and steel hangar, a hangar annex,

The Washington Windsock



By BLAINE STUBBLEFIELD

People are asking: What happened to the Navy's liquid-cooled engine, announced months ago? Regardless of that, there's another one now and it's away beyond the talk stage.

Mayor LaGuardia and staff, now planning a system of airfields for the New York region, have blueprints calling for some roof-top runways to be used by shuttle services.

Several hardshell admirals rejected the proposal of auxiliary aircraft carriers one year ago, but the Navy board approved. Maritime Commission got the construction program because it had facilities available.

British ship companies have a lot of money to buy airplanes—if their government would let them. They got the money from insurance firms on account of submarine sinkings.

Will Russia give air bases to the US from which to hit Japan? Your answer is as good as ours, but the Russians *have* refused Jap overtures for a peace guarantee. Muskovites are going along with us as best they can while still keeping clear of war with Japan.

Now is the time for private flying organizations to give a hand at rewriting their section of the Civil Air Regulations. A man who ought to know says the board and the administrator are in the mood for it.

The Truman Committee is writing a transportation report which will carry some aviation stuff. Which should remind you to look for more talk of an over-all transportation department in the government.

If successful lobbying depends on size of budget, the railroads must win. There are two or three score of single railroads bigger than the whole air system. Airline men say they are willing to fight the rail men but would like to fight the war first.

Communications Commission has criticized Western Union for failure to make specific plans for speed and price standards to meet competition of the telephone and airmail. The latter will be hard to catch up with when it gets going again.

Considered opinion of many aviation people here is that the Civil Aeronautics Board is asserting less authority—conforming more to Administration orders. If this is true, the possible outcome would be eventual creation of a supercommission of some kind, leaving the board a mass of technical and clerical duties.

and a service building. Cost is set at $400,000. While the hangar and annex will be used by MacDonald Brothers Aircraft during the war, it will revert to TCA afterwards.

Department of Transport, Ottawa, has started work on a new international airport at Fort William, Ont. It will cover about 300 acres and be equipped for customs and immigration clearance of planes and passengers.

The government has leased 200 sq. mi. of the Goose Bay area of Labrador for 99 yr., according to a report in the Toronto *Financial Post*. The arrangement, in which the Newfoundland Commission and the British government are parties, provides that after the war consideration will be given to extending the lease to cover civil as well as military rights. Canada has spent $15,000,000 building an airport at Goose Bay.

Changes in detail design and flight operation methods resulting in safety and regularity of schedules will be primarily responsible for postwar expansion in air transport, James T. Bain, TCA chief engineer, told a recent Toronto joint meeting of the Engineering Institute of Canada and the American SAE. There will be no revolutionary changes in plane structures and sizes for some time after the war, he predicted.

Canadian National Railways has registered opposition to the application of Quebec Airways (subsidiary of Canadian Pacific Air Lines) for a service to the Saguenay River region. Request for such service was made by the Aluminum Co. of Canada, Foundation Co. of Canada, and J. L. E. Price Co., the firms claiming that railway service was not adequate in the face of war emergencies

Aircraft Minister Howe revealed that 14 radio range and communication stations have been built, 7 additional ones are nearing completion, and construction of another 16 is planned in '43. He stated that for civil aviation, meterological and radio divisions a total of $100,000,000 had been spent on 286 projects, including construction of 146 new airfields.


By F. H. Fullerton

Construction of a huge test flight hangar for Canadian Pacific Air Lines is well under way at Municipal Airport, Vancouver, B. C. The building, 264 ft. long, 120 ft. wide, and more than 50 ft. high will be used to store and equip planes being tested.

Approximately 3,500 Boeing Aircraft employees in Vancouver, B. C. plant will receive wage increases of 6-7c. an hour, retroactive to July 15, 1943, it is announced by Boeing management and Aeronautical Lodge 756 officials. It is estimated the increase will amount to an estimated $1,960 a day, or $54,880 a month.

Women are not responding to Boeing's invitation to work at its Vancouver plants. Housing was found for 600, but only 60 took advantage of the offer.

Powell River Co., Ltd., will shortly begin the assembly of certain small parts for Boeing bombers at Powell River, B. C.

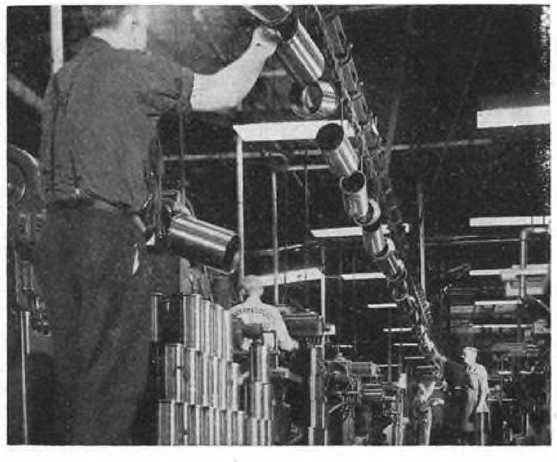

MOTOR MAKER'S METHOD

Packard engineers have incorporated automobile production methods into the manufacture of Rolls-Royce engines. Here cylinder liners proceed through various machining departments on an overhead conveyor. (Press Association photo.)

★ Calling Names ★

With the retirement of **Richard A. Von Hake** as vice-president in charge of Lockheed manufacturing, **Courtlandt S. Gross** has been made company vice-president and general manager; he will also retain the presidency of Vega. **Harris McIntosh,** former Vega production control director, has become special assistant to Lockheed Pres. Robert S. Gross in charge of management and organization control and scheduling. Von Hake had originally planned to retire Jan. 1, stated Pres. Gross, however "organization changes which would have taken place at the end of the year have been made now" to correspond with new production schedules.

John J. Ryan, Republic Aviation Corp. counsel, is elected a vice-president of the firm.

Justin A. Fitz, connected with Sperry Gyroscope for the past 26 yr., is appointed advertising director.

United Air Lines named three new area managers: **Clarence H. Bennett** at Oakland; **Glenn W. Evers** for Northern Chicago, and **Burton C. Koenitizer** at Philadelphia.

Robert S. Maurer, formerly of CAB, is named assistant to **H. R. Bolander, Jr.,** general counsel of Chicago & Southern Air Lines. **R. Todd Crutchfield** is appointed assistant to general manager of the company's modification center, and **H. Lance Forsdick** will manage the new employees' cafeteria.

Thomas A. Morgan, Sperry Gyroscope president, has accepted appointment as chairman of the aviation group of the N. Y. Committee of the National War Fund.

Clifford H. Collins, project engineer for Kinner Motors, is named asst. chief engineer.

Lowell E. White, formerly test pilot for Wright Aeronautical, has joined the research engineering staff of the C-O-Two Fire Equipment Co.

Delos M. Palmer, dean of engineering at the University of Toledo since 1934, has been appointed plant engineer at American Propeller Corp.

J. H. Tudhope is appointed executive assistant of ICA, headquartering in Montreal.

Northwest Airlines announces the appointment of **J. Harold Foster** as superintendent of its military aircraft modification project. **R. E. Remund** is named asst. supt. in charge of production; **H. G. Hougland** became asst. supt. in charge of administration, and **W. W. Corder** has been named asst. supt. in charge of production planning.

C. George Evans, personnel director of Air Associates, has been appointed a panel member of the regional WLB.

Capt. Jess E. Hart, Continental Air Lines pilot, resumes his duties as a major in the Army, temporarily terminating nine years of continuous service with the airline.

UAL's **Lee Hegglund,** of its Cheyenne maintenance base, won WPB's top award, Certificate for Production Ideas, for his development of two devices used in United's engine overhaul work. Two other UAL employees won honor awards.

John Dolza and **Harry C. Karcher,** Allison division, General Motors Corp., were awarded the Manly Memorial Medal of the SAE for contribution to progress in aircraft engine lubrication.

Dr. L. G. Lederer, for the past several months acting chief of PCA's medical department, is appointed director of the department.

Joseph J. Mitchener, Jr., former superintendent of CAA's War Training Service in the 2nd region, is appointed advisor and head of development division for Hawthorne School Flight organizations.

John Splain, former N. Y. Commissioner of Motor Vehicles, is appointed director of purchases for Hub Industries, Inc.

Ray W. Wells, TWA eastern division chief pilot since 1942, was named superintendent of TWA's newly created Midwest division. **Walton H. Smiley** was named to succeed him as chief pilot.

J. Francis Reilly has been appointed executive assistant to **CAB Chairman L. Welch Pogue,** succeeding **Robert B. Blas,** who joins Lockheed Aircraft's Washington office in an executive position.

William Martin Grampp, former director of purchases for Brewster Aeronautical, has gone with the Black Bear Co. as general manager.

Emil (Eddie) O. Schramm, Jr., has joined Clarostat Mfg. as purchasing agent.

Arthur J. Dickinson, formerly group engineer in charge of hydraulics design and installation on the *Mars* for Glenn L. Martin, has been appointed hydraulics design supervisor for Simmonds Aerocessories.

★ ASSEMBLY LINES ★

Method of driving engine stud bolts with power has been devised by Fairchild's Ranger Engines Div., which is offering details of the process to other manufacturers. Ranger reports its 21 machines save their cost every 24 days by enabling a worker to drive a day's quota of studs in an hour.


Pre-doped fabric and a high solvency lacquer have been developed by duPont for treating cloth surfaces. Handbrushing is reported replaced by high-speed lacquer spraying; number of coats of dope necessary has been reduced and sanding eliminated.

Chrysler Corp. has announced new process for cementing aluminum alloy and wood and rubber parts.

Conveyors are now being used to carry **rib** flaps through paint baths. Also paints of loud shades, when used on various pieces of shop machinery, are reported to improve workers' morale.

DO-ALL 3 MACHINES IN 1

BAND POLISHING
BAND FILING
CONTOUR SAWING

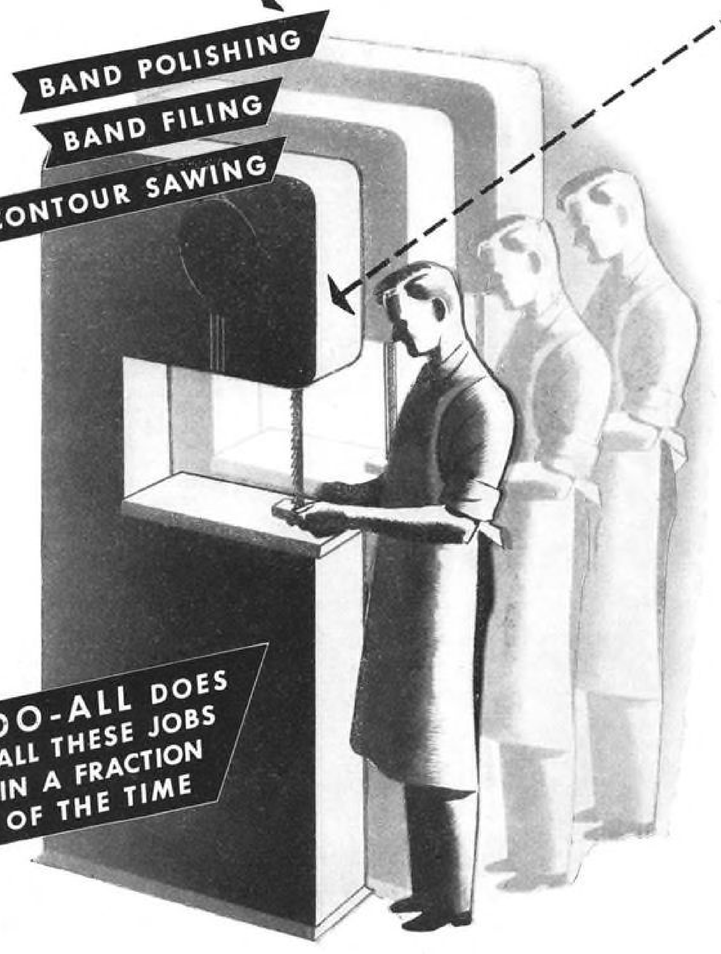


DO-ALL DOES ALL THESE JOBS IN A FRACTION OF THE TIME

SAWS. Cuts shapes in metals, alloys, plastics, plymetals, etc. Does internal or external cutting — follows any design, straight or curved line, through thick or thin sections, with no waste excepting a very fine kerf dust.

FILES. Replace the band saw with a DO-ALL Band File and you're all set for rapid, clean filing that will amaze even experts.

POLISHES. The same machine accommodates DO-ALL Polishing Bands that put a fine finish on any product in double-quick time.

Every shop needs contour sawing and with it band filing and polishing — all possible with these new, time-saving machine tools. Six models priced from $1,000 to $5,000 with motors.

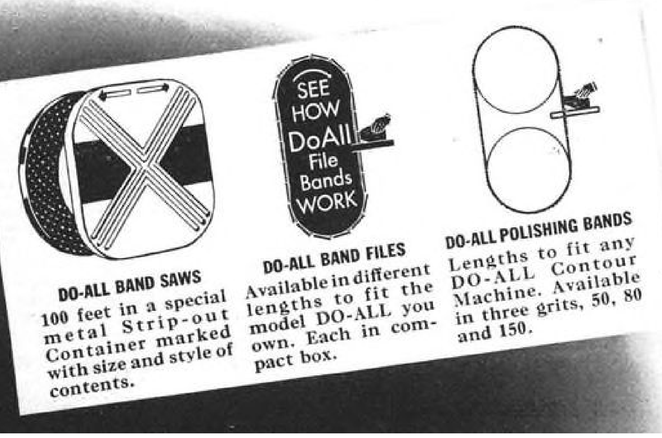

DO-ALL BAND SAWS
100 feet in a special metal Strip-out Container marked with size and style of contents.

DO-ALL BAND FILES
Available in different lengths to fit the model DO-ALL you own. Each in compact box.

DO-ALL POLISHING BANDS
Lengths to fit any DO-ALL Contour Machine. Available in three grits, 50, 80 and 150.

CONTINENTAL MACHINES, Inc.
1305 S. Washington Ave., Minneapolis 4, Minn.
DO-ALL Offices in 25 cities, with a staff of trained engineers to give you quick service on Contour Machines, Band Saws and Files, Gage Blocks and Surface Grinders

WOULD YOU LIKE A CONTOUR SAWING BOOK?
Send for a copy of this 265-page book of illustrated short cuts to faster and better machining. It's free.

Aviation Manufacturing

Interchangeability of Parts Still Problem On US Planes, World's Best, SAE Is Told

Los Angeles (Special to AVIATION)—Military aircraft being manufactured by the US aviation industry are better than anyone had any right to expect, but the serious problem of interchangeable parts remains to be solved—and quickly.

That was the message delivered to the Society of Automotive Engineers, Aviation Branch, at its National Aircraft Engineering and Production Meeting, held recently in the Biltmore Hotel here by Maj. Gen. Delmar H. Dunton, deputy director, Air Service Command, Wright Field.

Just returned from a tour of inspection covering all fronts where the AAF is operating, Gen. Dunton reported U. S. military aircraft the finest in the world, but said that keeping them in the fight is being seriously handicapped by variations in supposedly identical parts manufactured by different companies. Assurance that this problem will be solved was given by Pres. Harry W. Woodhead of Consolidated Vultee.

SAE Pres. Mac Short, Vega, called upon Robert Inseley, of the Manley Memorial Committee, to present awards to the 1942 winners, Harry C. Karcher and John Dolza, both of the Allison Division, General Motors Corp., for their co-authored paper on "Correlating Ground and Altitude Performance of Aircraft Engine Oiling Systems."

On the program for the three-day meeting attended by 1,700 were 13 papers, one panel discussion, and the formal speech by Gen. Dunton. Emphasis was on research, with eight papers covering findings in that field. Maintenance occupied a more prominent place than usual, with three papers. Production, heretofore the major problem, was the topic of only three of the papers.

Two controversial subjects, hydraulic vs. electrical controls, and standardized power packs, enlivened two of the sessions, with the former flaring up unexpectedly in one of the earlier discussion periods.

The standardized power "eggs" subject was argued pro and con by a five-man panel. Arguments tended toward the assumption of a "universal" power pack's advantages and disadvantages. In presenting the question, Discussion Chairman C. L. Johnson, Lockheed, listed possible objections to the power egg proposal, and for advantages read quotations from a two-part series of articles in AVIATION Sept. and Oct., '43, by Dr. Sanford Moss, titled "The Case for the Integral Power Plant." RAF Wing Commander McDiarmid clarified misunderstandings regarding British experience with power egg standardization and reported that, on the whole, experience favored the idea. In Britain, he reported, the plan has made it possible to use identical power plants on single-engine fighters and multi-engine bombers without loss of performance efficiency.

The cases for hydraulic and electrical control systems were presented in a paper jointly prepared and presented by W. C. Trautman, Bendix Aviation, Ltd., and R. E. Middleton, Aircraft Accessories Corp. Lt. Col. G. C. Crom, AAF, Wright Field, speaking as an engineer and not as an Army representative, declared that there is no controversy on the subject. Experience gained with both systems on combat planes indicated electrical controls were more satisfactory for a majority of uses. But he qualified that statement by saying that for certain functions hydraulic power is the only feasible form, particularly over short transmission distances. On planes subject to combat damage, he said, hydraulic lines are not favored because damage to them too frequently puts an entire mechanism out of commission. Experience in action has shown that 50 percent of a three-phase electrical wiring system can be put out of action without preventing operation of the equipment. Electric wires, he said, are easier to repair, trouble in them can be traced quicker, and defects or damage can be isolated more easily.

George R. Sanborn, service engineer with Boeing Aircraft Co., said that as a result of present experience with military planes, postwar commercial planes would be designed to require minimum servicing and that maintenance operations could be accomplished in two hours by a six- to eight-man crew.



At Los Angeles SAE meeting (left to right): General Chairman C. L. Johnson, Lockheed; Pres. Mac Short, Vega; Maj. Gen. Delmar H. Dunton, principal speaker; and Consolidated Vultee Pres. Harry Woodhead.

New AAF Laboratory

Dayton (Special to AVIATION) — Accommodations for planes with wingspans up to 250 ft. and gross loaded weight up to 150 tons—considerably larger than any aircraft now flying—will be provided in the new Static Test laboratory at Wright Field, AAF Materiel Command research center here when the big test building is completed next June.

Equipped with a main test floor area of 170x250 ft., it will contain enlarged facilities for static and dynamic testing of airplane structures under simulated flight conditions. Two wings adjoining the main unit will house testing apparatus and necessary laboratory and engineering-office space. Test floor will be equipped with 150 and 75-ton cranes.

Allowance Considered For Converting to Peace

For months industry has pressed the government to ease up on the renegotiation law, under which Army and Navy Price Adjustment Boards recapture excess profits.

The government has stood firm against all pressure to relax the program or to abolish the law. But in recent hearings, the House Ways and Means Committee took seriously the claims of industry representatives, particularly those of Francis A. Callery and Ralph S. Damon, speaking for the West and East Coast sections of the industry respectively. These men asked that "excess" profits be calculated after taxes, and that aircraft production earnings be considered for the duration of the war, not for just a single year. Otherwise, they said, the industry would lack reserve funds to convert to peace.

Congress is considering provisions under which aircraft and other industries will be justly compensated for the cost of converting their plants back to peace production. This is expected to take the form of liberalized renegotiation and tax benefit terms. Renegotiation is inextricably bound up with the problems of contract termination, liquidation of government owned plants, disposal of surplus war equipment, demobilization of manpower, and other factors. All these may be combined in the final solution.

Truman Happier

Conditions he criticized at Curtiss-Wright's Lockland, Ohio, plant have been "largely corrected," Sen. Truman announces. He states he "is very happy to report" that the company "has taken drastic action and recently made real progress. Production is better and expected to become much better."

Douglas Recruiting Chinese, Students

Chinese whose inability to speak English has kept them off the production lines are being enlisted in manufacturing by Douglas Aircraft, Santa Monica, Calif., through a group of sponsors known as China Aircraft, Inc. This organization has already sent a crew of trainees to Douglas to learn sheet metal work. They will become supervisors and instructors in a new factory being financed at an undisclosed California location by Defense Plant Corp.

Chinese will fill all but the top executive jobs in the production of parts for the A-20 *Havoc*. Workers have been recruited by full-page advertisements in San Francisco Chinese-language newspapers. China Aircraft is seeking 400 men and women, but it is not said whether this number will make up the entire staff. The project was worked out at conferences at Wright Field between representatives of the Materiel Command and the Chinese Air Force.

In another move to ease the worker shortage, Douglas' Long Beach plant is recruiting 16- and 17-yr.-old school students to do simple jobs on *Skytrains* and *Flying Fortresses*. They will work four hours a day at regular pay rates and attend school four hours. School credit will be given for aircraft work.

Terminations Expedited

To get manufacturers whose contract for one item has been terminated to work quickly on a newer product, AAF Materiel Command has adopted a new system to speed procurement procedures and settle details of terminations.

AAF gives no details on how the system will operate, but does say that it "will endeavor to expedite a fair and swift settlement without red tape."

Navy Inaugurates Scheme To Boost Worker Spirit

Washington (AVIATION Bureau—The Navy has established an Aeronautics Section in its Industrial Incentive Division to encourage bosses and workers in plants having prime and sub contracts to manufacture Navy planes. The Incentive Division is headed by Rear Adm. Clark H. Woodward.

The new section will deal with human factors only. It will seek to rouse the fighting spirit of plant workers—including management — to a higher pitch.

Chief among devices to be used will be tracing of origin of planes in combat and sending messages and speakers to the men and women who made them.

This will involve tracking down the serial numbers of wings, engines, and parts by the thousand. A special effort will be made to reach forgotten people in vendor and supplier plants.

Pictures and stories are to be distributed to plant magazines, returned veterans will address plant rallies, reports and booklets will be distributed, war news reported on loud speakers, and combat movies shown—all to bring the war to the home front desk and work bench.


Wider Stock Transfers

Broader list of items which may be transferred from the inventory of one manufacturer to another under authority of the Aircraft Scheduling Unit, Wright Field, has been announced by WPB. List will include swaged cable terminals, certain valves and fittings, flexible conduits, switches and circuit breakers, self-locking nuts, resistors, and certain bearings.

AAF Compresses Year's Testing Into 4-6 Weeks

Dayton (Special to AVIATION)—New model warplanes which the Army used to "feel out" in a year's flying before making large orders are now being put through combat-testing paces in four to six weeks by a group of 50 to 75 pilots of the AAF Accelerated Service Test Branch at Dayton municipal airport.


Pilots, a cross-section of combat veterans and youngsters recently graduated, keep their own flight records and make recommendations for changes in planes. Few flyers are assigned to this test flying for more than two months. Flights are made over a small area, even the long distance ones being wide circles about the field in case some difficulty necessitates landing.

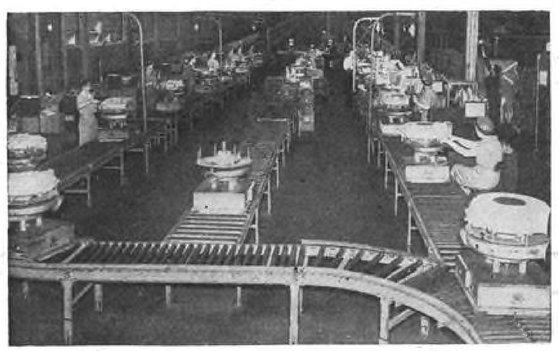

ALTITUDE BOOSTERS IN THE MAKING

Turbosuperchargers flow down assembly lines in General Electric's Fort Wayne, Ind., plant and arrive in the foreground ready for inspection. Larger parts are contained on movable racks behind the women workers who take smaller pieces from drawers in wooden boxes on which superchargers roll.

100,000th P&W Engine and 10,000th P-40 Reported Turned Out by Manufacturers

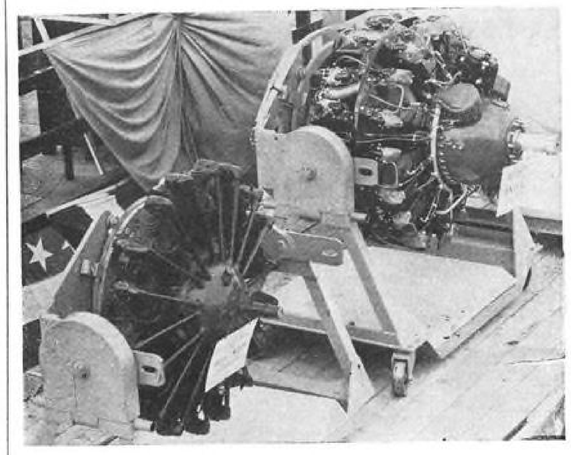

Magnificent then, a midget now. First engine produced by P & W in East Hartford in 1925 (left) was rated at 410 hp. Right: Big 2,000 hp. engine —No. 100,000 from this plant—will soon look small, for company has larger engines in the works.

Since the President called for 50,000 planes a year in May 1940, the price per horsepower has been reduced 30 percent on engines delivered from the East Hartford, Conn., plant of Pratt & Whitney, it was announced by Gen. Mgr. H. Mansfield Horner at a recent ceremony marking the delivery of the 100,000th power plant from this division of United Aircraft Corp. On August's 5,000,000 hp. from this plant the government was thus saved about $20,000,000.

United has also been authorized to purchase additional equipment for a Connecticut plant through a Defense Plant Corp. grant of about $880,000. The resulting over-all commitment by the Government is now approximately $12,350,000.

Production of B-24 P&W engines is at a record high in Buick plants and continues to accelerate, according to Harlow H. Curtice, vice-president of General Motors Corp. and general manager of Buick Motor Division. More engines will be produced in the last quarter of 1943 than during the entire year, 1942; total volume for this year will almost triple 1942 output. Employment in both Flint, Mich., and Melrose Park, Ill., plants is also at an all-time high.

Greater volume and mass production methods have substantially reduced the cost of engines, and the price per horsepower is lowest in aviation history, Curtice said.

The 10,000th P-40 fighter built since July, 1940, has been delivered by Curtiss-Wright to the AAF. Designated P-40N, it is powered by an Allison liquid-cooled engine and carries six .50 cal. machine guns. C-W statisticians figure that P-40's have knocked enemy craft out of the skies in a ratio of from 3 up to 20 to 1.

Other Production Notes

Door-opening 180 ft. wide and 34 ft. high is provided in new Minneapolis hangar completed for Minneapolis-Honeywell Regulator Co. Some indication of possible size of future bombers is said to be imaginable from the fact that 22-ft. clearance has been provided under the mezzanine for propellers, wings, and empennage. The hangar, built at the request of the AAF Materiel Command, will be used for electronic research. It can accommodate five *Flying Fortresses*.

Hangar for servicing its *Corsairs* is being built at Akron for Goodyear Aircraft. Financing of $2,500,000 has been provided by Defense Plant Corp.

Modification of *Liberators* at Fort Worth has been discontinued by Consolidated Vultee so that facilities can be used for increased bomber and transport production. Fort Worth B-24's, nearly 1,000 of which have been modified in the past year, will now be handled at Louisville and Tucson.


Since April Briggs Mfg. Co. production of bomber turrets and heat exchangers has multiplied three times. The company is making parts and subassemblies for seven types of warplanes. . . . Bendix Aviation Corp. output of magnesium castings during August exceeded that in all of 1939, and monthly production, now running nearly 400,000 lb., will soon be almost doubled.

the unseen force that helped conquer the air...

Next to the development of the plane itself perhaps the greatest single contribution to the conquest of the air is the electron vacuum tube. The very heart of radio communications, cross country beacons and instrument landing equipment—*these delicate devices provide the invisible power which enables man to fly safely.* The dependability of air travel is a direct reflection of the dependability and stamina of the vacuum tubes in these services. Eimac tubes are the established leaders in this field. First choice of the major airlines ...first in the new developments in radio...first among the leading electronic engineers throughout the world.

Follow the leaders to

Eimac REG. U. S. PAT. OFF. TUBES

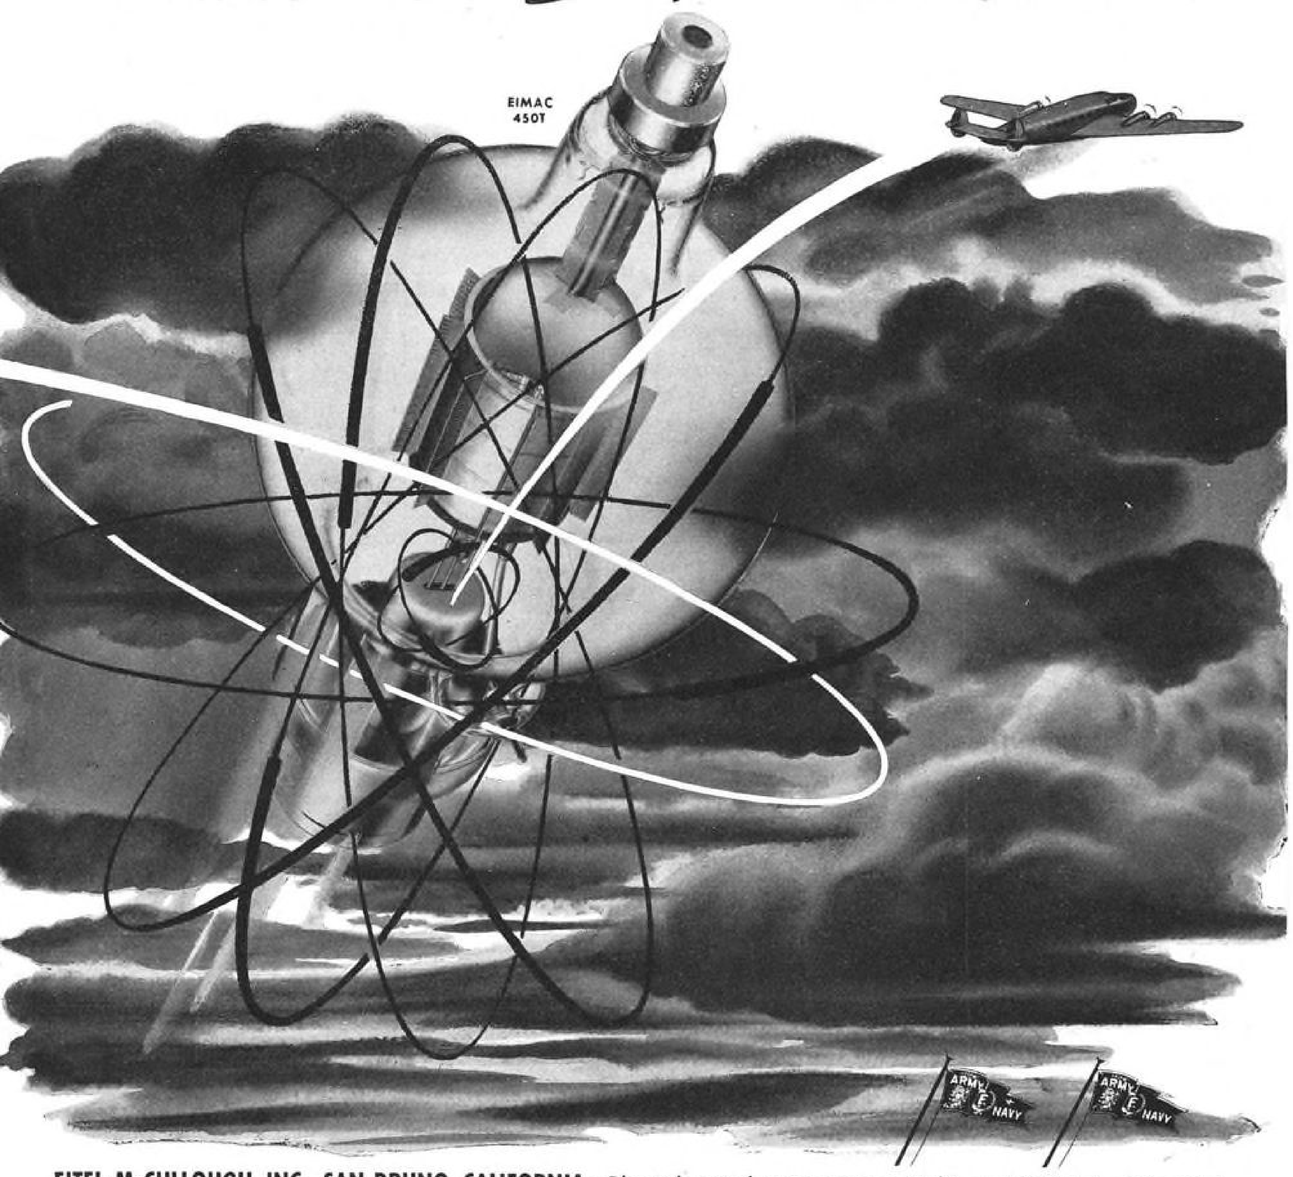

EITEL-McCULLOUGH, INC., SAN BRUNO, CALIFORNIA • Plants located at San Bruno, Calif. and Salt Lake City, Utah

Export Agents: FRAZAR & HANSEN • 301 Clay Street • San Francisco, California, U.S.A.

PRODUCTION-BATTLE CITATIONS

★ One Star ★

ARO EQUIPMENT CORP.
CUTLER-HAMMER, INC.
A. SCHRADER'S SON
SWITLIK PARACHUTE CO.

Army-Navy "E"

AMERICAN VISCOSE CORP.
CONSOLIDATED ENGINEERING CO.
CHAMPION SPARK PLUG CO.
CRESCENT PANEL CO.
CRUCIBLE STEEL CO.
DOUGLAS AIRCRAFT CO. (Long Beach)
ELGIN NATIONAL WATCH CO.
FEDERAL-MOGUL CORP.
GARDNER MACHINE CO.
GENERAL MOTORS CORP.
HAMILTON FOUNDRY & MACHINE CO.
HOOF PRODUCTS CO.
LIBERTY AIRCRAFT PRODUCTS CORP.
MICRO SWITCH CORP.
NASH-KELVINATOR CORP.
PACKAGE MACHINERY CO.
PHELPS DODGE COPPER PRODUCTS CORP.
RADIO CORP. (RCA Victor Div.)
RAYBESTOS DIVISION (Raybestos-Manhattan, Inc.)
ROCHESTER ROPES
SHENANGO-PENN MOLD CO.
UNITED AIRCRAFT PRODUCTS

Plumbing Standardized

Manufacture and delivery of metallic aircraft plumbing fittings for making fluid-tight joints will be restricted, after Mar. 1 next year, to AN standard types only by WPB General Limitation order L-313.

Exceptions are granted in direct government purchases, in cases where specific permission has been given, and in maintenance of planes with fittings delivered before next Mar. 1.

Two Pay Rates Raised

The War Labor Board has made two more airframe wage adjustments to curtail labor turnover.

Bell Aircraft plants in Buffalo and Niagara Falls, N. Y., were ordered to establish a starting rate of 65c. and to install a wage structure containing ten labor grades with a minimum rate of 80c. and a maximum of 85c. for the lowest skilled grade and a minimum of $1.40 and maximum of $1.60 for highest grade. The increases average 5c. per hour. The union's request for wage adjustments other than those required by the reclassification program were denied. Bell rates are not applicable to any other industry in the region.

A wage rate schedule recently approved for Boeing in Seattle called for a minimum of 82½c. and a top of $1.60 covering ten grades. At this writing the schedule for Boeing had been approved by the director of Economic Stabilization but the Bell order had not.

Few Accidents

Aircraft manufacturing was among the top five of 31 war industries in worker safety during 1942 and among the top six in the low-accident records, according to the National Safety Council's statistical yearbook. Employees suffered 9.53 disabling accidents per 1,000,000 hr. worked compared with an average of 14.85 for the other 30 industries.

Studies Speed Problems

Dr. George W. Lewis, NACA director of aeronautical research, has recently conferred with several aircraft manufacturers on problems growing out of speeds exceeding 400 mph. In these meetings, he has also reviewed the status of general aeronautical research and development. Engineers and designers of his own as well as other agencies have taken part.

NACA has large laboratories at Langley Field, Va., Moffett Field, Calif., and Cleveland.

Foreign Planes Tested By AAF at Wright Field

Dayton, Ohio (Special to AVIATION)—A British Avro *Lancaster* bomber is the newest addition to the wide variety of foreign planes which are being brought to Wright Field for comparison testing with American types. Other British planes which have been checked here include several Wellingtons, *Spitfires*, and *Hurricanes*, a Boulton-Paul *Defiant* turret fighter, a Bristol *Beaufighter*, three De Haviland *Mosquitos*, and a giant *Horsa* troop glider.

A number of captured enemy planes also have been shipped here. While many were in fragmentary condition, several have been rebuilt into flying form including two models of the Messerschmitt 109. Other craft brought in include a JU-88, a Jap *Aichi* dive bomber, a *Zero*, and parts of several other enemy aircraft. Additional complete planes and parts are being shipped.

AERO SCREW COMPANY

WRITE FOR OUR NEW CATALOG...



...SHOWING NEW LOW PRICES AND UP-TO-DATE ENGINEERING DATA

Economies resulting from increased production and improved manufacturing facilities make it possible for us to offer AEROSCREW products at lower prices than ever before! Look to AEROSCREW for a good source of such standard items as Drilled Fillister Head Machine Screws, Steel Drilled Head Aircraft Bolts, Hexagon Head Bolts, Clevis Bolts and Pins, Washer Head Screws, and Threaded Taper Pins. Use this new Catalog also as a ready reference for the latest specifications, dimensions, and Army-Navy part numbers.

We Are Specialists...

in the manufacture of selected standard items of aircraft hardware. All AEROSCREW products are made of high quality material to exacting standards of precision and finish in all details, and can be depended on to give reliable service. Look to AEROSCREW for quality and accuracy at low cost!

AERO SCREW COMPANY

19th Ave. at 12th St., Rockford, Illinois

Transport Aviation

Roosevelt Approves "Free Air" Principle On Foreign Routes and Reciprocity on Bases

Washington (AVIATION Bureau)—President Roosevelt's comments at a recent press conference on the postwar overseas airlines were the first official guidance that has been presented on that matter. The President spoke because aviation will figure largely in forthcoming agreements between Russia, England, and other United Nations and because the airline industry has felt it was in great need of at least basic information on which to plan.

But the Chief Executive was giving only his opinions. Weighty as these are, at home and abroad, he cannot yet speak conclusively. For one thing, he has agreed with leaders in the Senate to include Congress in any international aviation agreements, many of which come very near being treaties. Furthermore, no conclusions have been reached by the President in his talks with Prime Minister Churchill, though he did say he believed Churchill agreed with him.

Mr. Roosevelt laid down certain working principles which may well be the foundation of the world air system. He said he favored private ownership and operation of all U. S. overseas lines except those to remote places which could not earn a profit—and there will be several. He favored "innocent passage" of airlines—a freedom of the air under which the routes of one country would cross another, permitting fuel stops, under agreement, but not the discharge or pickup of traffic. By using the word airlines he indicated that he was thinking of a number of overseas lines, not just one as advocated by Pan American and United under their "single instrument" policy.

The President disapproved of any attempt by this country to obtain sovereignty over air bases which we have built on the soil of other nations. Common use of these ports should be worked out by agreement among the United Nations, he said.

It was assumed by some members of the Airlines Committee on United States Air Policy that the President had approved their resolution of some weeks ago in favor of "free and open" competition abroad. In effect, the President did approve of the committee's program in general, whether he had it in mind or not. Some highly placed authorities said that Mr. Roosevelt was expounding the conclusions of the Interdepartmental Committee on Foreign Air Policy—whose report had not at this writing been made public.

Soon afterwards, American Export Airlines announced that it favored "regulated competition" on overseas routes, thus joining forces with the Airlines Committee group of 16. Actually, the 16 do not expect that all of them will be in "starvation" competition on the Atlantic or anywhere else. All may apply, but CAB and the President will approve only enough routes to handle the traffic. Not only domestic airlines but also steamship companies and the railroads will be among the applicants. They can come in on a limited basis (supplementing their own services) as the law stands, and they hope to have the law revised (through the Lea bill) so they can compete against existing airlines. Foreign-flag competition terminating in this country can be limited by reciprocal agreements.

CAB Holds Hearings On Feeder Airlines

Washington (AVIATION Bureau) — Civil Aeronautics Board is studying all the data it can find as a basis for certification of routes which will make up the postwar feeder airline system. Initial hearings have been held here.


Charles I. Stanton, administrator of CAA, stated his opinion that the shorter distances represent "perhaps the largest chunk of travel business potentially available to our domestic airlines." Assuming that air mail and express traffic would parallel passenger travel, Stanton gave figures from a survey, showing that, if intermediate stops are made between two large cities the travel between them increases enormously.

Short distance travel must have net advantages over other transportation, mainly time and cost. Cost hinges chiefly upon the design of a special short-range airplane. The time advantage depends upon the problem of getting passengers from door-to-door; there is no solution in sight for that one. Stanton was not hopeful for early success of the helicopter for mass work of this kind. If it were possible to build enough airports, located so that door-to-door time would be no more than 15 min., places 100 mi. apart would be within commuting distance. But this problem is not easy.

H. R. Bazley, president of All American Aviation, said that by using the air mail pickup system the government could extend direct air mail to every mail station in the country at small cost to the Post Office and none to the government for airports or aids to flight.

Stanton added that decreasing costs of airline operation will facilitate flying all first class mail where delivery will be expedited. Surface transport of mail now costs the Post Office .14 mills per pound-mile; air is .96 mills. He said the eventual rate for all first class mail by air, to be paid carriers, might be .4 mills per pound-mile.

He reported that only 52 of the 122 cities from 25,000 to 50,000 population outside metropolitan districts and only 58 of the 413 such cities from 10,000 to 25,000 now have direct air service and that most of them ought to have it.

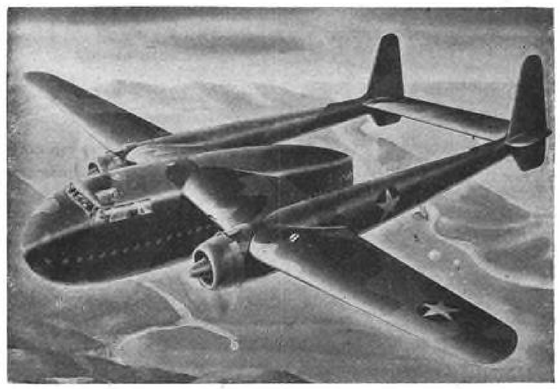

FAIRCHILD FOR WAR AND PEACE

Fairchild cargo carrier designed for carrying warriors and material is also expected to be suitable for peacetime hauling. Specifications are now restricted to the facts that the plane is metal, built to operate from medium-sized fields, and has "a range in excess of 3,500 mi."

Seaboard Case Results In "Air Monroe Doctrine"

Washington (AVIATION Bureau)—The famous Atlantic "seaboard" case—which indicates a Monroe Doctrine for aviation—needs a little explanation for the record. CAB had consolidated a number of Atlantic coast route applications for economy of hearing time. Among them was the Colonial application for a line from New York to Nassau, Bahamas, which came under the head of "foreign" business.

Because the board is not considering any foreign applications—awaiting the determination of U. S. foreign air policy—CAB shelved the whole group and so advised the President. Mr. Roosevelt returned the decision with neither approval nor disapproval, because it was not really a decision but a postponement.

At the same time, the board announced that it was returning to active status all applications for routes to Mexico and the Caribbean which connected with South America—and in fact, inviting new applications. This is significant on two counts: First, it reestablishes the Miami-Caribbean route invitations of a year ago. At that time the Miami expansion was a military proposal to serve the Caribbean because shipping was so short. It was abandoned because Army and Navy disagreed on it. Now it's a good neighbor proposition. Second, CAB's consideration of such routes indicates they are not regarded as foreign.

In other words, other countries will not be consulted about what we do in the Western hemisphere.

Foreign Airmail Needs

Total volume of US mail to foreign countries now sent by sea is about 70,000,000 lb. annually, according to a survey by Civil Aeronautics Board. From 142 to 231 transport planes could handle all overseas mail, assuming daily schedules, and carry many passengers and cargo, in the opinion of CAB analysts.

Since postal rates for seaborne mail are very low, the amount sent by air would depend upon downward adjustment of airmail rates. Probably all US foreign mail would never be carried exclusively by air. However, the government could transfer all outbound mail to planes. Such action would result in great development of international services.

Cities Taking "Paper and Concrete" Steps To Become Postwar Transport Centers

Major cities are announcing plans for postwar air transport. In New York, where the Mayor and City Council periodically argue over the suitability of Idlewild as the name for the huge airport already being built several miles from LaGuardia Field on the south shore of Long Island, the Board of Trade has established an Aviation Section. It is intended, says Floyd N. Dull, Board of Trade president, to "serve as the representative spokesman for the growing aviation industry in this area and will offer a clearing place for ideas and platform for an aviation forum."

In Oklahoma City, engineers of the Austin Co., contractors, have submitted plans for a $25,000,000 locally-financed passenger and freight terminal covering six square mi. of land and 2,500 acres of water for seaplanes. Two of six runways will be 11,000 ft. long and 500 ft. wide, a size thought suitable for glider tow trains and planes carrying 400 passengers or 160,000 lb. of freight. Railroad and truck freight will be discharged on a level below the loading ramp; transfers will be made by elevators. A 100-room hotel and helicopter facilities have also been planned.


In Nashville, where a 7,000-ft. runway and 5,300-ft. landing strip are being completed in a $2,000,000 expansion program at Berry Field, plans have been announced for eventual development of the municipal airport. Contemplated are four 10,000-ft. runways and other facilities for handling 35 planes simultaneously.

Other large postwar projects are being planned by Miami, Memphis, and Atlanta.

Another Month— More Applications

Washington (AVIATION Bureau)—It would take pages of fine print to tell about all the applications for new air routes, domestic and foreign. Although CAB has stated that the date of filing will have no bearing on the ultimate decision, applications continue to pour in. No new operations can begin unless the Army and Navy approve of them as military necessities and allocate airplanes to them.


Only 27 of the approximately 150 airplanes requisitioned from the airlines by the Army have been returned.

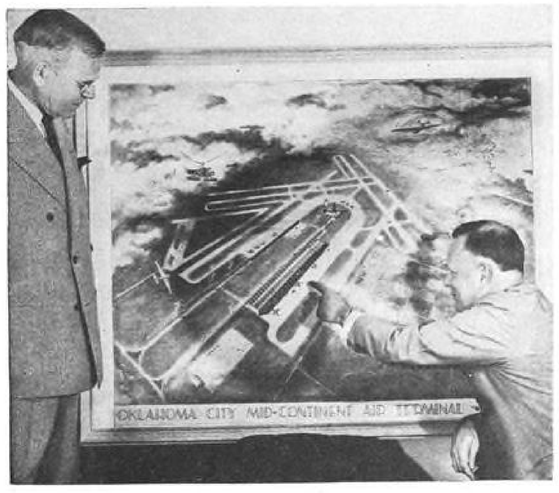

A. D. Engle, Austin Co. engineer (right), shows Mayor R. A. Hefner of Oklahoma City, the location of one of two 11,000-ft. runways planned for the city's projected $25,000,000 airport.

The boys just naturally called it the

"PICCOLO" VALVE

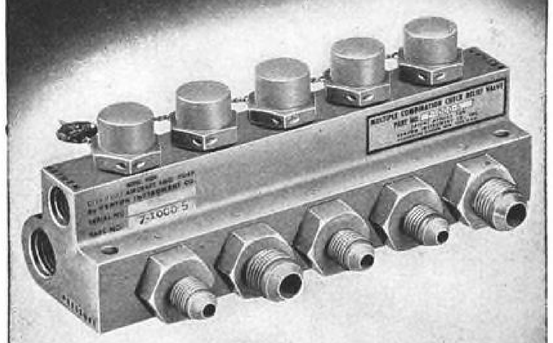

It started out as the Kenyon Combination Multiple Check-Relief Valve Assembly—but the boys who worked on it had a better idea. So now it's the Kenyon "Piccolo" Valve.

More important than the name is the fact that it provides in a single housing a multiplicity of valve units (as many as 16), all of which discharge into a common return line. Used in the high-pressure hydraulic valve systems of military or commercial aircraft, the "Piccolo" Valve

★ centralizes the thermal expansion relief valves of several closed hydraulic systems.


★ costs less than an equal number of single valve units.

★ simplifies maintenance because single assembly can be located in one readily accessible spot.

Full construction details and specifications of the "Piccolo" Valve supplied on request. We also solicit inquiries on all types of precision aircraft instruments.

KENYON
INSTRUMENT CO., INC.
Huntington Station, L. I., New York

If it's Kenyon-made KENYON it's precision-built

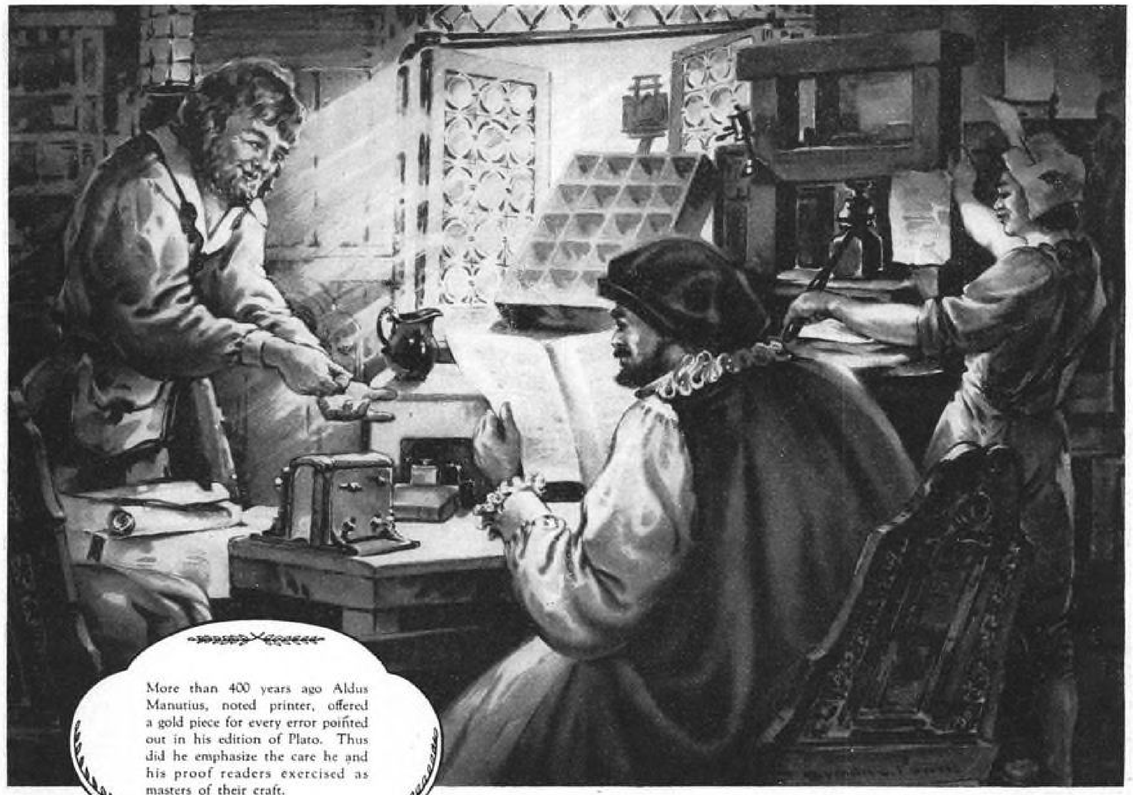

More than 400 years ago Aldus Manutius, noted printer, offered a gold piece for every error pointed out in his edition of Plato. Thus did he emphasize the care he and his proof readers exercised as masters of their craft.

A Gold Florin, Sir..

for any error which you find in this edition

In other days care was frequently measured in terms of gold. Today, care means much more than gold. It means the saving of American lives, American homes and property, American freedom. War materials must be precision made, endurance tested.

Careful attention to detail has always been a watchword with RUSTLESS, largest and only exclusive maker of Stainless Steel. RUSTLESS knowledge and experience are directed particularly to perfection in the manufacture of Stainless Steel.

Control and *care* are critical factors in achieving high uniform quality . . . control in selecting, analyzing and proportioning raw materials, care in control of temperatures and chemical reactions . . . control in every process, plus care in surface grinding every billet, care in protecting bright bars from dust, care in packing and shipping.

Today RUSTLESS is making more and better Stainless Steel than ever before . . . Stainless Steel that meets the strict quality requirements laid down for vital war material . . . steel to assure a decisive victory and the preservation of a lasting peace.

BUY U. S. WAR BONDS AND STAMPS

RUSTLESS

IRON AND STEEL CORPORATION

BALTIMORE, MARYLAND

Producing STAINLESS STEEL *Exclusively*

Aviation Abroad

New Jap Planes

Several new types of Nipponese warplanes are reported in Jap army announcements. These planes, supposed to make America and Britain "shiver in their boots," are the *Shoki* fighter, *Shitei* patrol bomber, and *Donryu* heavy bomber. Around Wewak and China, a new Jap fighter has been encountered which looks like a German design or at least a copy of Nazi ideas. It has a V-type in-line engine and more armor than is usual in Jap types. Its armament remains the same as on the *Zero*, consisting of two 7.7 mm. machine guns in the wings and two 12.7 mm. small cannon firing through the airscrew arc. Both span and length are approximately the same as in the *Zero*.

A few planes of this new model have been shot down by our P-38's, for which they are reported to be no match.

Malta Was BOAC Stop Even at Peak of Bombing

Even during the peak of Axis bombings against **Malta**, regular flights of the British Overseas Airways were being "checked out of" Malta, employed as an intermediate base for the BOAC England-Egypt route.

Services which are now being operated by the corporation cover a great part of the world, the main ones being as follows: Britain-America via Lisbon and Bermuda, also flown via Lagos across South Atlantic; Britain-Foynes (Ireland) and Britain-Lisbon; Britain-Canada nonstop with landplanes.


In the Middle and Far Eastern areas: Cairo-Karachi, Teheran, and Habaniyeh, Khartoum-Lagos, Nairobi and Asmara, with connections from Asmara to Cairo and Addis Ababa, and also to Karachi.

New services have also been operated for some time between Kisumu and Madagascar. The above services, however, do not give a complete picture of BOAC's operations, since mention of some routes is still restricted.

★INTERNATIONAL BRIEFS★

F. C. Sturroch, minister of Transport for South Africa, recently announced that a South African airline would establish service to England right after the end of the war bringing resumption of normal air connections.

British Overseas Airways' last deHavilland *Albatross* plane, one named the *Fortuna*, recently cracked up during an emergency landing near Foynes, Ireland. While the plane was a total washout, no passengers or members of the crew were injured.

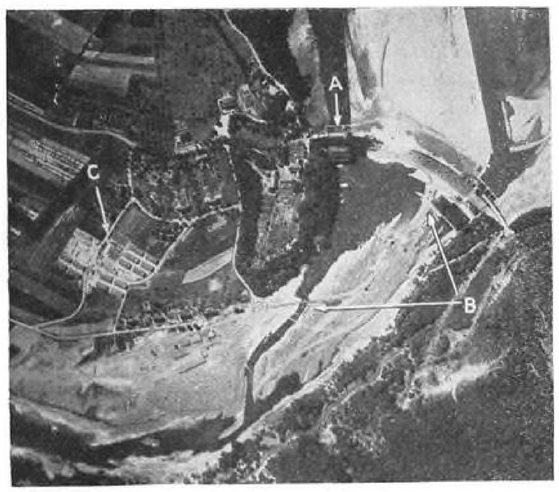

NAZIS STRAIN TO FIX EDER

Vital importance of Eder dam to German war effort is evidenced by Nazis drastic efforts to repair it—clearly shown in this reconnaissance shot taken two months after RAF Lancasters blasted it open to flood countryside. The dam reservoir is now completely dry, and the river's waters are being drained through No. 2 power house (seen at A just left of dam breach). Construction of light railroad B indicates preparations for repair. And camp accommodations for workmen have been set up at C. It means a diversion of mighty-scarce labor from other war work. (International News photo.)

On Schedule . . . by "Vista"

One of Sweden's ABA transports has been lost on its flight from a Scottish base to Stockholm, Sweden—first such blow suffered by the line since its launching in Mar. 1942. This service, only neutral airline from continental Europe to England, was started when Sweden felt it needed closer and faster contact with Britain, and it has been operated with outstanding regularity. At this writing, it is not known how the line's plane went down; its radio suddenly became silent, and no trace of wreckage or survivors has been found. Among those on board was Capt. K. G. Lindner, chief pilot for ABA and one of Europe's outstanding transport flyers.

Spain, having recently purchased the Nazi-controlled Iberia airline, is now negotiating with both Britain and America to obtain gas, spare parts and, if possible, new aircraft, to maintain connections with Portugal, Spanish Morocco, and other Mediterranean points.

In England, where the rather one-sided interest of the government re air transport has aroused criticism, the Empire Air Parley opened on Oct. 11. With Lord Beaverbrook as chairman, the agenda called for a unified plan for postwar air cooperation between the Dominions. This parley is expected to indicate the attitude which the British Empire will take at United Nations' air conferences which will undoubtedly follow. Incidentally, it is said that Lord Beaverbrook was brought back into the government as Lord Privy Seal specifically to consider postwar civil aviation matters.

The RAF and other British air forces are flying a complete set of captured German and Italian planes for identification and for practice-flight instruction of new crews. Especially during the recent African and Sicilian campaigns, many undamaged examples of the latest German planes were found.

To instill confidence in new crews, British *Halifaxes* **are** flown regularly on any one of their four engines. The plane is said to be able to maintain altitude with sufficient gas on board to bring it back from all normal missions.

A recent article mentioned the mistaken attitude of the public that military planes are cheaper than is generally announced. While a first class fighter in America will cost from $125,000 ot $150,000 and a *Fortress* about $450,000, a *Spitfire* cost the equivalent of $20,000 little more than a year ago, and a *Stirling* bomber about $120,000. Lower operating costs and wages, different manufacturing processes, and higher production are generally given as the main reasons for this price differential.

Latest German long-range fighter is the Me-410, a development of the Messerschmitt 110 and 210. While no specific details on this new model have yet been made available, it is known that the Me-210A, with its half-ton of armor plate, had serious structural defects. They probably have been corrected in this latest version.

According to the Nazis, current high tonnage bombing against war industries in Germany and its satellites is only an Allied move to promote postwar American and British exports to the continent. Similar bombing tactics by the Nazis were, naturally, only attempts to obtain sufficient lebensraum.

Three big British shipping concerns, Cunard, Furness, and Manchester Lines have now amended their charters to allow them to purchase or charter airliners to operate postwar airlines. Cunard especially has been interested in air transport, and at one time or another had some interests in both Imperial Airways and its successor, British Overseas Airways.

United Airlines has received permission from the CAB to purchase 3,750 out of the 5,000 shares of stock of the Lineas Aereas Mineras S. A. in Mexico, with the stipulation that operations would not be extended beyond Mexico's borders.

British aircraft production has reached such proportions that there is an actual shortage of test pilots for the acceptance of new aircraft. Some pilots are now being transferred from operating squadrons to special schools which will train them for their exacting duties at the big aircraft plants.

Harold J. Riog, president of Pan American Grace Airways, has received Bolivia's highest decoration, *Condor de los Andes*, in recognition of his outstanding services to that country.

TACA (Transportes Aereos Centro-Americanos) very soon will **open a regular airline** service between San Jose, Costa Rica, and Miami, Fla., realizing one of the dreams of its founder and president, Lowell Yerex. BWIA (British West Indian Airways) —another Yerex venture—is already flying from Trinidad to the United States.

Air Commodore A. H. Orlebar, 46, has died in London following an illness of several weeks. Celebrated as leader of Britain's Schneider Cup racing teams in '29 and '31, Orlebar most recently was with Combined Operations—the RAF Commandos—as acting air vice marshal, then as deputy chief.



The Eastern Air Lines KELLETT which flew mail for a full year from the roof of the Philadelphia Post Office. One of many Kellett "firsts" in its years of pioneering the manufacture of rotary wing aircraft.

THE PIONEER LOOKS TO TOMORROW

TODAY in cooperation with the U.S.A.A.F. Kellett is speeding the engineering development and production of autogiros and helicopters for military needs. We cannot give details now. Five Kellett plants are also applying their aeronautical ingenuity to the production of important parts for some of America's most famous fighters and bombers — Thunderbolts, Liberators, Warhawks and Marauders . . . while an expanding corps of forward-looking engineers continues Kellett's rotary wing developments for the future.

TOMORROW we look forward to opportunities for Kelletts to cut time and costs in patrolling electric power lines, oil pipe lines, in transporting mail and passengers, dusting crops—and in a wide variety of services for industry, commerce, forestry and agriculture. Kellett's years of experience and accomplishments continue to attract pioneering minds, men who, with us, see vast opportunities for rotary wing progress in the post-war era. Kellett Aircraft Corporation, Upper Darby (Philadelphia), Pennsylvania.



A Kellett accompanied Admiral Byrd on his voyage to the South Pole.



Border-patrol use is dramatically demonstrating Kellett serviceability.



. . . and Kellett is looking to a future of expanding service to the nation.

KELLETT

OLDEST ROTARY WING AIRCRAFT MANUFACTURING COMPANY

Chicago & Southern Air Lines has registered 107,989 common shares with the SEC to provide funds for expansion of facilities and reduction of loans. Of the shares registered, 60,000 are to be offered to underwriters at a maximum price not exceeding $16 a share or $960,000, while 47,989 shares are registered to be issued pursuant to options at $8 a share or $388,912.

United Air Lines is prepared to spend as much as $20,000,000 in postwar expansion in the first 18 mo. after the fighting ends, according to Pres. W. A. Patterson. At the same time, however, Mr. Patterson warned that care was necessary to avert danger of over-expansion and ill-advised financing by the aviation transport industry in the postwar era. Meanwhile, UAL has received CAB approval of its purchase of controlling interest in the capital stock of Lineas Aereas Mineras, S. A., of Mexico. Price was $146,750. The board stipulated that United's operation of the line must not go beyond the borders of Mexico.

Aviation Corp. reports net earnings for the nine months ended Aug. 31 of $2,810,486 or 49c. a share against $3,671,716 or 64c. a share in the like 1942 period. Sales were $57,234,554 compared with $29,635,211 the previous year. Postwar adjustment reserves of $855,000 were set aside against $495,000 for this purpose last year. This report, drafted prior to 1943 renegotiation, does not include equity in undistributed earnings of a number of subsidiaries which are not consolidated or of companies in which large investments are held.

Bendix Aviation Corp. sales of $643,000,000 for the nine months ended June 30 were at an annual rate almost 50 times those of all of 1938, Pres. E. R. Breech revealed in a letter to stockholders. Sales in the like 1942 period were $297,000,000. Price reductions of $149,000,000 were made in the first nine months of the 1942 fiscal year.

Beech Aircraft has developed a sideline far removed from its plane-making activities. The company is drilling for oil with one well reported to be down 3,210 feet under its Wichita airport. Another well has been started seven miles south of its plant.

Northeast Airlines will undertake new financing of $1,800,000 to $2,000,000 if its application for a Boston-New York route extension is approved, according to company officials. A decision on the application is not anticipated before next spring or summer.

Ryan Aeronautical Co. is increasing its board of directors from three to five members through the addition of Frank N. Phillips, president of Washburn Wire Co. of Phillipsdale, R. I., and C. Arnholt Smith, vice-president of United States National Bank of San Diego, Calif. Ryan also reports net earnings for the eight months ended June 30 of $424,648 or 97c. a share. Pres. T. Claude Ryan warned shareholders that the figures should not be considered "definite or final" because profits for the period are still subject to renegotiation.

Air Associates has declared an extra dividend of 35c. a share in addition to the regular quarterly dividend of 20c. a share on the company's common stock.

Year-end dividend payments by a large number of aircraft concerns probably will be made this month. Notice of payments will be made earlier this year to aid the taxpayer in making his final income tax estimate on Dec. 15.

All-American Aviation reports unfilled orders amounting to about $3,000,000 and recently stated that profits for the September quarter were more than sufficient to cover the annual dividend requirements on the recently offered convertible preferred stock. Current assets on Aug. 31 were more than double current liabilities.

W. R. Grace & Co., owner of one-half the capital stock of the Panagra Air Line, also has been the second or third largest owner of Eastern Air Lines' stock. This was revealed at a recent CAB hearing held to act on Panagra's application to secure a United States terminal for its line now operating along the West coast of South America.

Curtiss-Wright Corp. has received notice of conclusion of renegotiation on its 1942 earnings. The final settlement was the same as indicated in the preliminary report, which showed that voluntary price reductions plus renegotiation would result in a saving of $175,139,379 to the government on the company's 1942 business.

Aircraft Accessories Corp. reports net earnings of $741,433 or $1.21 a share for the fiscal year ended Apr. 30, against $265,662 or 44c. a share in the preceding fiscal year. On the basis of the increased common stock outstanding on July 30, as a result of preferred stock conversion, the earnings for the year ended last April would amount to $1.04 a share.

Sellers predominated in July stock transactions in aviation stocks on the part of officers and directors, according to the SEC. Tabulation: Republic Aviation Corp., 3,900 shares purchased by John J. Daly, a director; Aviation Corp., 1,680 shares sold by Victor Emanuel, president, and 1,500 shares sold by William F. Wise, vice-president; Continental Motors, 1,000 shares sold by Thomas Jackson, an officer; and Western Air Lines, 2,900 shares sold by Wm. A. Coulter, a director.

Sperry Corp. reports net earnings of $4,242,813 or $2.11 a share for the first half of 1943 compared with $2,394,237 or $1.19 a share in the like 1942 period. An additional reserve of $2,500,000 has been set aside from earnings to meet contract terminations.

By RAYMOND L. HOADLEY

Trickle of profits in '44 . . . . Prospects for modifications in "reneg" . . . . Rail-air issue brews . . . . Airline stocks.

AIRCRAFT STOCKHOLDERS can, in the case of most companies, look forward to substantially increased sales again next year, and they are also entitled to hope that a small trickle of additional earnings may be reported in 1944. Still, the latter can be only a slender hope, for there can be no assurances of larger aircraft company earnings even though the 40 percent increase in warplane production planned by the WPB in 1944 is achieved. The Treasury wants a 10 percent jump in normal corporate taxes next year—to 50 percent. That, if enacted by Congress, will hurt. And although a wide assortment of bills have been dropped in the legislative hopper, Congress so far gives little indication of giving the aircraft industry any tangible relief from its present intolerable financial position.

No measureable progress has been made in the last six months in straightening out the confused situation surrounding contract termination, and no substantial relief seems in sight in connection with the current harsh renegotiation procedure. Protracted hearings held by two House committees have indicated the plight of aircraft concerns with respect to working capital and postwar reserves, the case being capably presented by representatives of the industry. But most members of the powerful Ways and Means Committee still seem determined to continue contract renegotiation with but minor modifications.

Such modifications, it appears likely, will include (1) the right of appeal to the courts when contractors feel they have been treated unfairly, (2) full plant amortization in figuring war production costs, and (3) exemption of firms having less than $500,000 of war business in one year. Anxiously awaited will be the more major decision by our lawmakers whether to effect renegotiation *before* taxes or *after* taxes. Most administration officials strongly oppose the latter alternative, but in such possible action by Congress lies the only substantial aid in this highly controversial matter that appears in the offing for the aircraft industry.

Meanwhile there is much initerest among the airlines regarding the battle the railroads have quietly waged to permit their entry into the air transport field. The Association of American Railroads is behind the move to reverse a tradition of law and government policy dating back to 1914. The issue probably will be fought out in Congress this winter, with the airlines bound to oppose, tooth and nail, the attempt by the rails to break into the air transport field.

Airline stocks have dropped back from their high prices established earlier this year, with Wall Street offering various and sundry reasons for the decline. Most plausible explanation to us is the fact that these stocks have advanced much faster than the rest of the stock market—so much so that an adjustment was long over due. Airline prospects are as promising as ever, but the continued high ratio of their stock prices to earnings indicates that future prospects of this popular group have been fairly well discounted for the time being. Furthermore the excess profits tax has placed a definite ceiling on the earning power these stocks can establish in wartime.

Aviation People



FELIX KALLIS, for the past six months chief engineer of Southwest Airways, has been appointed general manager of the company's aircraft and engine overhaul depot on Thunderbird Field. He will continue as chief aeronautical engineer in addition to his new managerial duties. (Southwest Airways photo.)



MRS. ALLAIRE C. duPONT, widow of Richard C. duPont, was elected a director of All American Aviation, the company founded by her husband. Mr. duPont had severed all relations with the company when he became special assistant to the Commanding General in charge of the Glider program.



J. I. HAMILTON, former administrative engineer of the propeller division of Curtiss-Wright, has been named assistant to R. Elmer Minton, manager of military programs for the division. His new work will include coordinating Curtiss electric propeller output meeting warplane manufacturers schedules.



PAUL J. STURM has been appointed manager at Sky Harbor, Southwest Airways' war training service school. He has been general manager of the company's overhaul depot, operated for the AAF. His first task will be extensive improvements in the shop and hangars. (Southwest Airways photo.)



ROBERT H. HINCKLEY, asst. to the president of Sperry Gyroscope, was honored by Ogden, Utah, which has named its new $900,000 air terminal the Robert H. Hinckley Airport in recognition of his contribution to the development of civilian and commercial flying and airports throughout the nation.



LT. COL. BEN STERN has been appointed director of information and statistics for the Civil Aeronautics Administration. While on active duty with the Marine Corps he was detailed to the Coordinator of Information and to the OWI as special field representative. (CAA photo.)



JOHN J. BUCKLEY has been appointed production manager of Hub Industries, Inc. He was formerly on the staff of Anderson Nichols Associates, consulting engineers for Curtiss-Wright's Columbus plant, and before that was works manager for Sharples Corp., Philadelphia.



CAPT. STAN A. PALMER, member of the first Army P-40 fighter squadron sent to the defense of Guadalcanal and a veteran of the South Pacific war theater with more than 75 combat missions to his credit, is now asst. operations officer and test pilot checking P-40's for the Army.



BERNARD L. WHELAN has been elected general manager of Sikorsky Aircraft division of United Aircraft. He has been with the company for 15 yr.; started as a test pilot in 1928, became manager of Rentschler Field (then known as United Airport), and later became general manager of the United Airport division of the corporation. United also announces that **LORENZO L. SNOW** (right) has been made manager of the airport division. He, too, is a veteran pilot who received his first flight instruction from Arch Hoxie in 1911. Before joining Pratt & Whitney as an installation engineer in 1934 he operated an airport.





ROBERT McCULLOCH resigned from McCulloch Engineering Corp. to undertake a new development vital to the war effort. His newly formed organization will be known as the McCulloch Aircraft Co. He announced, however, that he will remain as a member of the board of directors and will serve as consultant to the Engineering Corp., which will continue to operate as a self-contained unit with the same personnel at its present site under the management of **R. J. MINSHALL** (right) who has been named president.





CAPT. WILLIAM A. WINSTON, Pan American Airways pilot, has completed ten years of flying for the company. Using his 17th logbook, he has 14,000 hr. of flying to his credit and has commanded PAA Boeing "Clippers" since 1939. (PAA photo.)



T. C. DOUGAN has been appointed assistant general purchasing agent for United Air Lines at Chicago. He has been with the company's purchasing department for the past five years as buyer and, since the war, as priorities specialist. (UAL photo.)



MAJ. GENERAL WALTER R. WEAVER, recently commanding general of the US-AAF TTC, has become associated with The Aviation Corp. and will serve in a consultative capacity. He will retire from the service after more than 40 yr. of Army life.

Recent Books

• *BOOT STRAPS: THE AUTOBIOGRAPHY OF TOM M. GIRDLER in collaboration with Boyden Sparkes. Charles Scribner's Sons, New York.* 471 *pages,* $3.

Shortly after his adventure over Tokyo, Gen. Doolittle visited a Consolidated Aircraft Corp. plant in California. And when Chairman Tom Girdler showed him "our full-size model of the biggest airplane that has ever been conceived," Doolittle leaned back to see the whole of this structure and said: "I don't believe it. It's just a damned lie."

This bit is among the highlights in Girdler's account of his career. As he tells it here most of his efforts have been directed toward the perpetuation of the type of management which, stimulated by the profit motive, has resulted in the present development of American industry. Girdler describes himself as a specialist in management rather than one in any particular field of enterprise. Thus after years in steel, culminating in the chairmanship of Republic Steel Corp., he was able to assume the additional duties of the chairmanship of Consolidated Vultee. Of this position he writes at some length of his company associations, particularly with Pres. Harry Woodhead and Designer I. M. Laddon.

He also issues a sober warning to his readers: "Inevitably the people of the United States are going to have to make up their minds whether they want to gamble their lives and happiness on some socialistic scheme of state capitalism, entirely theoretical, or whether as free individuals to drive ahead to achieve a still higher living standard out of various enterprises growing out of capitalism."

• *MATHEMATICS OF FLIGHT, by James Naidich. McGraw-Hill Book Co., New York.* 400 *pages, illustrations, index,* $2.75.

• *MATHEMATICS FOR THE SHEET METAL WORKER, by Clayton E. Buell. Pitman Publishing Corp., New York.* 199 *pages, index,* $2.

• *SHOP MATHEMATICS, by Arthur A. Dick. Ronald Press Co., New York,* 230 *pages, index,* $2.40.

Naidich: From arithmetic through equations, ratios, scales, proportions, angles, and simple trigonometry to the principles of aerodynamics and research which are outlined in problems. A brief directory lists construction features and specifications of American civilian and warplanes. Designed to prepare students with no previous mathematics background for aviation training.

Buell: Practical topics simply considered for shop workers include use of formulas; bend allowances; measurement of lengths, areas, weights, and volume; template development from tables; and strength of materials.

Dick: Fundamentals of arithmetic, algebraic equations, geometrical constructions and computations, and practical trigonometry for vocational school curriculums.

• *GAS TURBINES AND JET PROPULSION FOR AIRCRAFT, by G. Geoffrey Smith. Flight Publishing Co., Ltd., London. Paper bound,* 80 *pages, illustrations,* 75c.

"Air is the working fluid," writes Managing Editor Smith (of British magazines *Flight* and *Aircraft Production*) of this power system. "Fuel, which for practical purposes will be any of the natural or synthetic hydrocarbons which we use in engines today, is required for addition of heat to the air. Air is drawn in, compressed into a heating chamber, and heat is added by the combustion of fuel. On re-expansion sufficient energy is taken by a motive unit to drive the compressor, and the air, still capable of expansion, discharges to atmosphere as a high-velocity efflux from a nozzle or nozzles.

"This efflux, or jet, produces a reaction, in the nature of an axial thrust on the plant, which constitutes the propulsive effort. . . . By comparison with a supercharged four-stroke reciprocating engine, a turbine-compressor plant should materially reduce cost, weight, production time, and complication."

Principles, design, and construction which may result in these advantages are assessed by Smith in chapters on compressors, effect of the system on aircraft design, and steam and gas turbines.

• *METALS AND ALLOYS DATA BOOK, by Samuel L. Hoyt. Reinhold Publishing Co., New York.* 334 *pages, charts, index,* $4.75.

Confining himself solely to figures—and what little prose is necessary to clarify them—Mr. Hoyt, technical advisor to the Battelle Memorial Institute, has compiled 340 tables on the properties and characteristics of various metals and alloys classified as wrought, cast, and stainless steels; heat- and corrosion-resistant casting alloys; non-ferrous alloys; and additional metals including chromium, cobalt, tungsten, cadmium, and bismuth. Other tables of general data include the periodic system, properties and melting points of elements, simple tests for identifying metals, and conversion and specification information. The material is intended for engineering application, not instruction.

• *AIRCRAFT ELECTRICAL ENGINEERING, by Randolph Matson. McGraw-Hill Book Co., New York.* 372 *pages, illustrations, index,* $3.50.

This is a clearly written text which, to quote the author, assumes "a reasonable acquaintance with electrical theory." But "the vast amount of theory and technical data that is necessry in the design of electrical apparatus for aircraft has been omitted, because these design problems are encountered primarily by equipment manufacturers."

Result is an easily understood introduction to the prineiples, operation, and installation of modern equipment. Material is listed under the headings of drawing practice, wiring, power supply systems and equipment, motors and power drives, lighting, conduit, junction boxes, bonding and shielding, and radio.

• *STUDIES IN ARC WELDING. James F. Lincoln Arc Welding Foundation, Cleveland.* 1,295 *pages, illustrations, index,* $1.50.

A section of seven papers, included in this collection of 98 covering general industrial fabrication, is devoted to aircraft. With illustrations, drawings, specifications, and calculations of costs, these articles consider economical welding of engine mounts, design of a welded propeller blade, redesign of engine tail pipe to increase length of life, are welding of magnesium structures, boilers, and tubular fuselages, and determination of what parts should be are welded.

• *SPIN IN, DUMBWHACKS, by Lt. Richard N. Ryan, AAF. J. B. Lippincott Co., Philadelphia.* 153 *pages,* $1.75.

Humorous, breezy account of the author's experiences from physical examination to wings—all of which impressed him with the injustice of the fact that "birds is lucky. They learn easy-like."

Canada Trains Them By Tens of Thousands

(*Continued from page* 221)

the elementary training aircraft; and (3) Total costs of the plan excluding (1) and (2) were to be borne by Canada, with 80.64 percent; Australia, 11.28 percent; and New Zealand, 8.08 percent.

Subsequent to these arrangements and owing to the exigencies of war, the United Kingdom was unable to provide all the aircraft and parts called for. Canada, as agent for the United Kingdom, then purchased necessary equipment to a total of $98,000,000, largely from the United States.

In the latter part of 1941 certain RAF schools were established in Canada, the entire cost of which, except land, was to be borne by the United Kingdom. A new agreement was entered into June 5, 1942, to extend activities of the training plan to Mar. 31, 1945.

On June 30, 1942, the financial situation under the old agreement was substantially as follows: Total expenditures under the plan, excluding contributions in kind by the United Kingdom, were $500,567,000, of which $43,000,000 was payable by Australia and $35,000,000 by New Zealand. Total monetary obligation of the U. K. under this arrangement on July 1, 1942, was approximately $279,000,000, of which $66,500,000 has been received and the balance is presently being examined by both governments for final settlement. The value of contributions in kind from the U. K. to that date probably exceeds $100,000,000.

The present agreement calls for maintaining all RCAF and RAF schools in existence on June 30, 1942, and institution of additional schools, particularly the more advanced training units. The entire cost of training in Canada of RAF, RCAF, RAAF and RNZAF aircrews, including recruiting, manning, and elementary training of RCAF aircrews previously borne exclusively by Canada and operational training previously borne exclusively by the United Kingdom was estimated to cost $1,446,000,000 from July 1, 1942 to Mar. 31, 1945. The agreement called for the United Kingdom to assume a liability for half this amount, $723,000,000.

The governments of Australia and New Zealand will pay for training their personnel in Canada on a per capita basis as arranged between the governments of United Kingdom, Australia, and New Zealand. The amounts received for such training will be credited to the U. K. against her liability to Canada.

Under the present agreement lasting to Mar. 31, 1945, Canada is supplying a substantial proportion of the trainees but not the proportion she supplied under the old agreement because of the larger total, and numbers of trainees sent by U. K. is increased. This includes men from other parts of the Empire and from European members of the United Nations. Complete coordination of air training has been established, with the RAF schools preserving identity but integrated under RCAF control. Canada, as administrator of the plan, determines the nature and quantities of equipment required.

"Quality rather than quantity has become the keynote of the training organization," Minister Power emphasized. "As a more experienced training organization emerges, so the caliber of training improves.

"The first great rush to get people overseas in a hurry is about over," he added. "Subsequent developments have been directed more toward improving the quality of training than increasing the number of air crews graduating. The ever-changing methods of modern warfare require continual revision of training methods and teaching of additional subjects. To meet this condition, greater emphasis is being laid on specialist training in navigation, armament, and instrument flying. Some new schools have been opened and others will be opened, but the period of large expansion is past.

"The objective of the plan," he explained, "was to train thousands of commonwealth aircrews in order (1) to meet and hold the enemy air strength and prevent it from doing too much damage to Great Britain, then the last citadel in Europe as well as the future springboard for an attack on Hitler; (2) to attain air supremacy; (3) to destroy enemy air power; and (4) to destroy the economic life of Germany and its allies. We can say without false pride that the air training plan has been a mighty factor in the attainment of the first three objectives. It has contributed largely to the local air superiority won in Africa and over the continent of Europe and promises to be an essential element in the realization of the final objective—that of crushing out of existence German economic might."

Minister Power revealed that Canada has trained 50,000 men for aircrew duties. "That number," he said, "would be more than enough to man 15,000 combat planes. We passed that figure several months ago, and even making allowance for the interruption in training that took place this winter owing to unseasonable weather, there is no slackening in our effort to continue to produce aircrews at a rate more accelerated than heretofore. We have not as yet reached peak production on a monthly basis and will not reach that peak production for several months. When we do, we will continue to produce trained airerews for the duration of the war, as long as we can find men in Canada and in the United Nations of the caliber, quality, and aptitude to make aircrews."

He pointed out that the air force requires 53,000 recruits during the current year. "This provides for our aircrews and male groundcrews," he said, "but does not take into consideration enlistments required for the women's division. Almost 12,000 women have been enlisted, and although present enlistments in this category are substantial, existing training facilities would enable us to accept an even larger number than those offered at present. The air training plan is now fairly well stabilized, which means that our aircrew requirements henceforth will be fairly constant, and the number required for groundcrews will dwindle to a point providing only for normal replacements.

"The air force has always been in the fortunate position of having a substantial reserve of airerew recruits awaiting training. Since the beginning of the year, however, this reserve has been considerably reduced. Potential applicants in the upper age brackets are no longer available in any substantial numbers, and as the war progresses we have to depend more and more upon the group of young men becoming of enlistment age each year."

Construction of units is almost at a standstill, Power revealed. "New schools, other than those already planned, are not contemplated at the moment," he said. "We are, however, planning for additional accommodation for men and machines at certain types of schools, but brought about largely by new and changing requirements in the airerew categories and in the methods of training the men.

"With regard to aircraft, the new Combined Training Organization requires, naturally, more than the old. We now have over 10,000 training aircraft. We will need many more before we are through. And we now have the assurance that, largely due to Canadian production—in fact, entirely due to Canadian production—these requirements will be met, insofar as certain categories of training aircraft are concerned. But we need not be complacent about numbers. The airplanes are not always serviceable, and though we did not come to the dead end—which I feared might be possible some 18 mo.

The Guardsman Way Speeds Up Production of CG-4A Gliders

Guardsman AVIATION FINISHES

Proved by tests with 5 Manufacturers

— Operations cut from thirteen to seven

— Man-hours of labor cut from 24 hours, 56 minutes — to 8 hours, 32 minutes

— Elapsed time for finish cut from 29 hours, 48 minutes — to 2 hours, 32 minutes

— Materials consumed cut from 29½ gallons — to 14 gallons

These savings in time, man-hours, operations and materials can not be overlooked in the urgency of war production — when every second counts — when every minute saved in production means more needed equipment on the fighting fronts. These production tests made over a period of 90 days with 5 different manufacturers* of CG-4A Gliders confirm the vital job Guardsman Aviation Finishes can do to speed up production.

*Name of manufacturer on request.

What GUARDSMAN AVIATION FINISHES are doing for others, they can do for you.

Continuously supplying finishes to Wright Field since 1935.

GRAND RAPIDS VARNISH CORPORATION

GRAND RAPIDS · MICHIGAN



Today's war of movement goes into even faster action as the 'round-the-clock allied air attacks soften up enemy-prepared positions, blast supply lines and wreck armament plants.


Here at Acme, we're also in action—24 hours a day. Every previous record in producing tools, patterns, and heat-treated aluminum castings has been broken. And new records have a very short life. For the faster we work, the more we help war production plants to deliver fighting tools on time.

An experienced staff of engineers is a vital part of the Acme organization. Why not let us see if we can help you eliminate any bottlenecks that may be lessening production in your plant?

ACME PATTERN & TOOL COMPANY, Inc.
DAYTON, OHIO

Heat-Treated Aluminum Castings—Patterns—Tools—Tool Designing—Production Processing



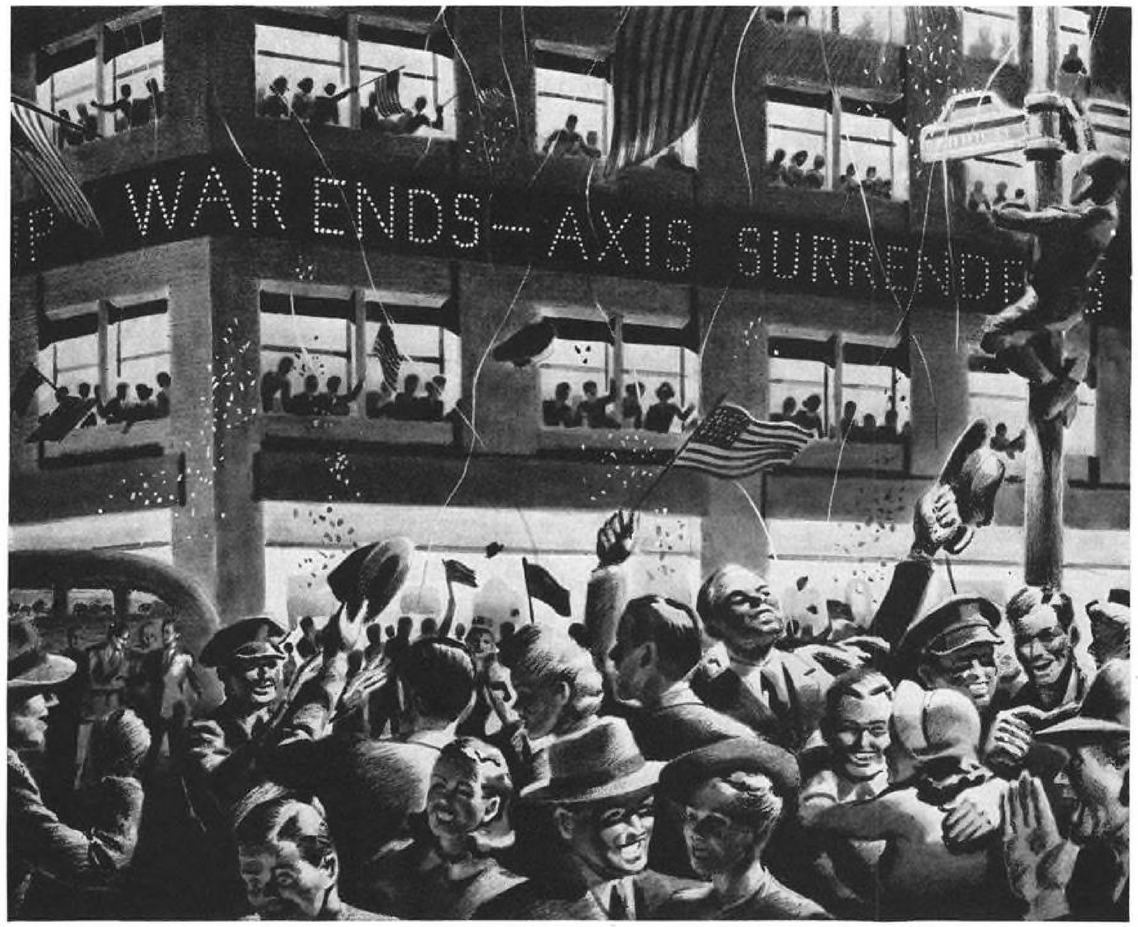

STREET SCENE—*1947*

WHEN WILL total Victory come? No one knows, but this is certain: inexorably, retribution draws nearer the monster minds that opened the floodgates of war and drenched the world in blood and sweat and tears. America's armed might and the astounding production performance of Industry leave no doubt as to the final victory. The Joyce Machine Company is grateful for the privilege of contributing materially to Industry's proud record, with millions of dollars worth of assemblies and precision parts for America's leading war plants—and for the Army and Navy as well.

When Victory comes, Americans will once again take up their normal pursuits—and normal buying habits. They will look for products long denied them by the exigencies of war-making. And they will have ample funds with which to satisfy their peace time needs. Will *you* be prepared to fill those needs—or at least be able to start on an even footing with competitors? The broad experience and innate ingenuity of Joyce's engineering staff may prove a pay lode for you in planning production of your postwar products. If it can be made better, faster or cheaper, Joyce "know how" will find the way. A Joyce representative will be glad to explain in detail the many advantages we can offer.

★ *Buy Bonds Here—*
Untie the Bonds Over There ★

JOYCE
Machine Company
2000 WHEATSHEAF LANE • PHILADELPHIA
★
MANUFACTURERS OF PRECISION PARTS
FOR ALL KEY INDUSTRIES

BEHIND THE MAN ▶ BEHIND THE MAN ▶ BEHIND THE GUN

ago when I pointed out to the House that owing to the hard usage and the shortage of spares we might be in a difficult position—there are times when there are delays, and we still have our days of anxiety. And there are certain types of machines for certain special types of schools which are very difficult to obtain.

"With regard to the number of schools under the original contract to produce the number of graduates then envisioned, there were to have been established in Canada a maximum number of 74 schools and other units. A comparison of the original plan with the actual situation as of Mar. 31, 1943, indicates that we almost doubled that. There are actually 154 schools in operation today. In many cases schools have twice the capacity originally planned, so that these figures do not reflect the full development which has taken place."

Minister Power further revealed statistics of distances flown by Canadian planes, operating in the training organization. "The average miles flown per day in the training plan," he said, "is 2,006,626, a distance equal to 80 times around the earth at the equator. The total miles flown in Mar., 1943, were 62,205,415, a distance about equal to 260 trips to the moon. The miles flown in the first quarter of 1943 were 162,569,510. The cumulative number of miles flown by the joint air training plan from its inception to Mar., 1943, totalled 6,588,098,593, which is equal to 71 trips to the sun."

They Skyblazed Africa "Way Back When"

(*Continued from page* 197)

been developed from England, via France, Italy, and the Mediterranean, as far as Mwanza (Tanganyika), passenger and mail services beginning on Feb. 28 of that year. Regular services on the whole route began Jan. 20, 1932.

Thus until the spread of the present war to the Mediterranean, a passenger made the journey from Britain to South Africa in five days. Leaving Southampton, England, in the early morning, he stayed the night at Athens, after refueling stops at Marseilles, Rome and Brindisi. By noon of the next day, he was in Alexandria; and he rested the second night at Wadi Halfa after stops at Cairo and Luxor. Following the Nile, he journeyed on the third day to Khartoum, Malakal, Port Bell, and Kisumu. The fourth day saw him at the airports of Dar-es-Salaam, Lindi, and Mozambique, and by the end of the fifth day, on which he called at Beira and Lourenco Marques, in Portuguese East Africa, he



. . . Like *all* Plomb Tools

Professional mechanics find the Plomb box wrench exactly right, for three important reasons —

1. **It works better because it is accurate, well-balanced, built for efficiency.**
2. **It is safer because it will not slip.**
3. **It lasts longer because it is practically unbreakable.**

You'll find these things true of all Plomb tools — from wrenches to cold chisels — and you'll find the ones you need for your war job at the Plomb dealer near you. Call on him for your stock tools — *Plomb Tool Company, Los Angeles 11, California, U.S.A.*

PLOMB



reached Durban, 7,245 mi. from his starting point.

On the route through Africa he passed through three important air junctions. From Kisumu, Wilson Airways ran a network of lines through Central Africa, and from Beira, Rhodesia & Nyasaland Airways operated routes throughout the Rhodesias.

By far the most important spur line, however—especially in view of its development in the present war by Britain and America—was that which runs directly across Africa from east to west, from Khartoum to Lagos on the West Coast of Africa. This is one of the most remarkable air routes, passing through El Obeid, El Fasher, and El Geneina (all in the Anglo Egyptian Sudan) Fort Lamy, French Equatorial Africa, and Maiduguri, Kana, Kaduna, Minna, Oshogbo, and Lagos (all in Nigeria).

Organization and development of this route is one of the epics of air transport. Out of a wilderness of jungle, scrubs, and desert, amid sandstorms, tornadoes, and torrential rains, beset with all the dangers and pestilences of the tropics, a small band of British pilots and engineers carved an air route long before this war. This route in the war against Nazism, was to become the United Nations' vital link with the battlefields in the Near East.

Serious attempts to span the Continent across the center from east to west were first made in 1930, when three RAF aircraft made the flight in short stages. Storms and a crash in a remote jungle were to a large extent compensated by enthusiasm of the natives, who saw a new link with the world through the coming of the "great bird."

At Maiduguri and Kano, crowds of over 30,000 waited from sunrise for the aireraft to arrive. Chiefs and their people were in gala attire; the beat of tomtoms almost drowned the drone of the engines. The natives were incredulous when they saw the RAF men step from the airplanes; it could not be conceived that anyone could travel in such a contraption. One widespread belief was that the plane had been wound up like a clockwork toy at the last stopping place.


Then, in 1936, Imperial Airways began to establish this 2,500 mi. route on a permanent basis. First pilot on the route was Capt. O. P. Jones. After his inaugural flight, the service was taken over by Capt. R. O. O. Taylor, First Officer (now Captain) K. M. Cass, and Flight Engineer H. Morris. The aireraft used were DeHavilland 86's named "Delia" and "Daedalus."

Dromes on the route were little more than clearings on the bush. Facilities for maintenance, accommodation for night stops, or for preparing food were practically nil. The crew carried their own mattresses and lived in grass huts. Morris, besides filling the role of engineer, was also steward, looking after food for crew and passengers.


Khartoum, the eastern terminus, was well equipped for maintenance work, being on the already existing Empire route to South Africa, but the first night stop at El Geneina, in the Sudan, brought the first taste of desert life. Gazelles were often all over the clearing intended as an airfield, giraffes stood placidly around to watch the landings, natives stared awe-stricken as the old DH-86 came to earth.

Great help was afforded by all sorts of people in the remote places along this difficult route. M. Stratis, Greek agent at El Fasher, provided the first crew with food when otherwise, they believe, they might have starved. Then there were the French Colonial troops at Abesha, who were hospitality personified—a pleasant contrast to the field, which was like a golf course studded with bunkers.

Kano, in Nigeria, was one of the brightest spots on the route, although accommodations were not very good. Members of the West African Frontier Force showed their appreciation of the new air service by helping the first crew

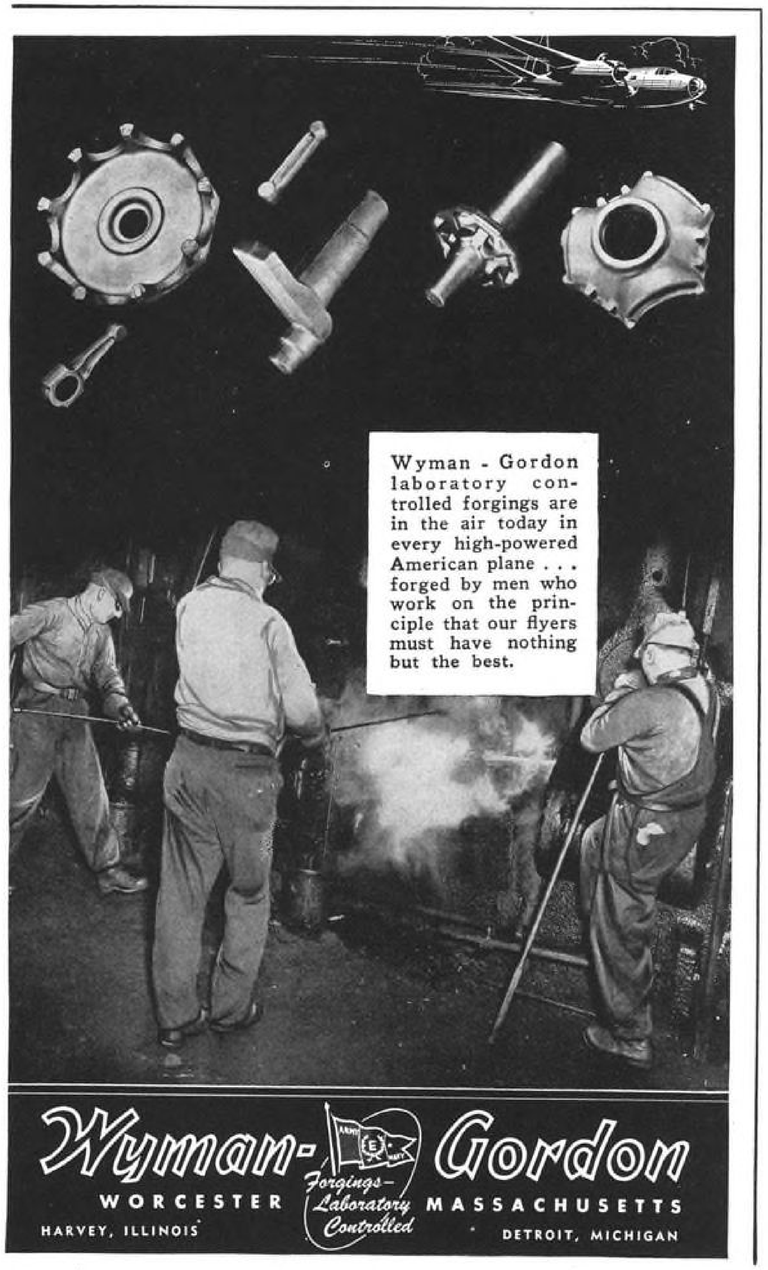

THE TUBING YOU *can't* SEE!

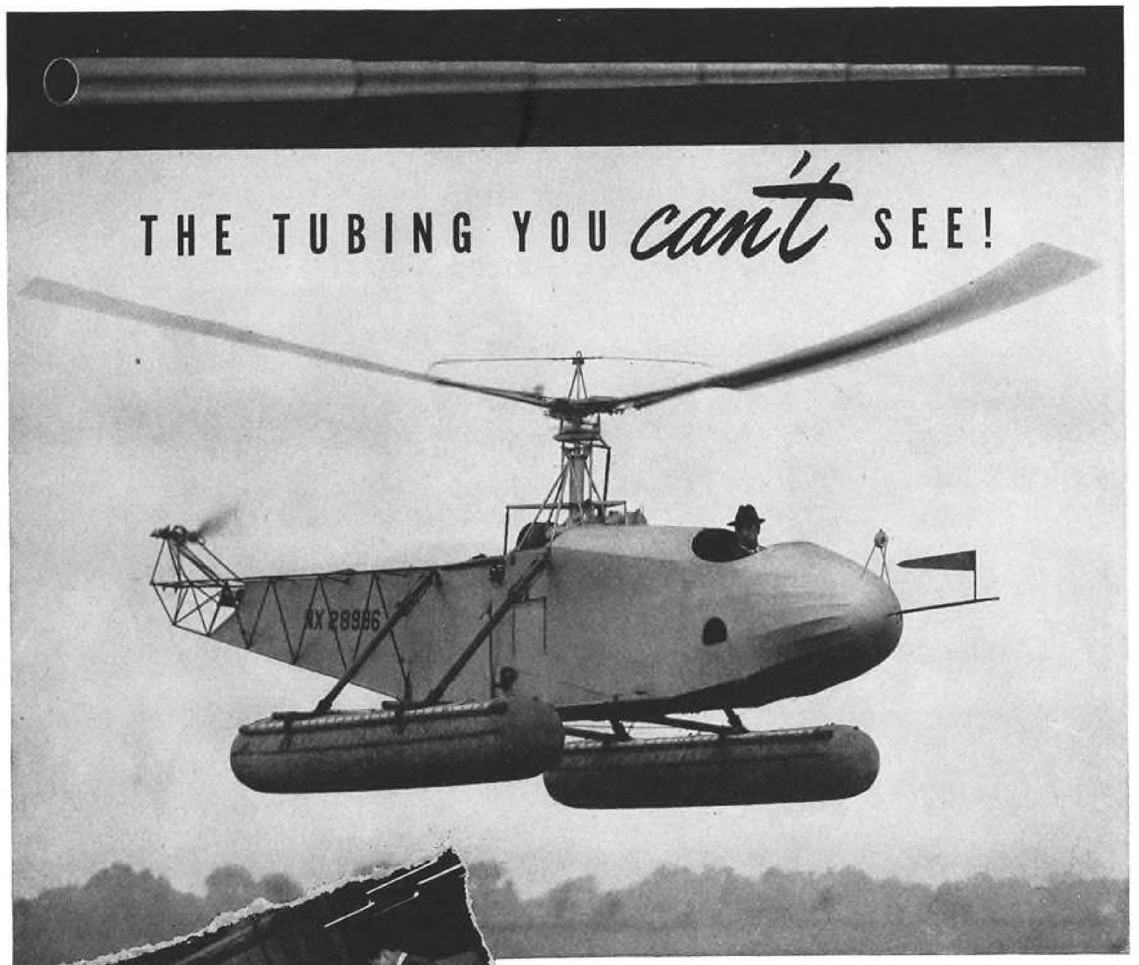



This set of three rotor blades is being carefully matched prior to installation on a Helicopter. Note large end of step-tapered tubing extending from root of blade, ready for attachment to rotor hub.

Hidden within each rotor blade on the Sikorsky Helicopter is a Summerill step-tapered tube that has been engineered to meet the obviously severe requirements.

More than 17 feet in length, these seamless steel rotor-blade spars are reduced in 6 steps from 2" O.D. x .125" wall to ⅝" O.D. x .050" wall. Almost perfect uniformity of weight, center of gravity, stiffness and other physical characteristics are required in the matching of these rotor spars.

It is but natural that those who are developing and building rotary wing aircraft turn to Summerill for the solution of their tubing problems. Being specialists in the field of tubing specialties, Summerill maintains a research department that is constantly working with industry in the development of new sections, shapes and sizes to meet unusual needs.

SUMMERILL TUBING COMPANY
Bridgeport • Montgomery County • Penna.

SUMMERILL TUBING COMPANY
Affiliated with EDGAR T. WARD'S SONS CO. and COLUMBIA STEEL & SHAFTING CO.





VIBRATION May Have Caused This

Common causes of mechanical failure of automobiles are vibration-loosed connections. And loose connections can result in anything from an annoying body squeak to a loose wheel—and a serious accident. The answer to any vibration-loosed connection is a vibration-proof fastening. After Victory, automobile manufacturers with an eye to added driving safety will protect their cars with Boots Self-Locking Nuts which withstand severest vibration.

More Cargo, When They Fly With Their Boots On

Cargo planes are performing heroic service ferrying men and supplies to the fighting fronts. Almost always loaded to capacity, they are constantly subjected to terrific vibration stress by engines which must strain to the limit to lift the big ships from the ground and keep them in the air. That these planes are able to "take" severest vibration without "coming apart at the seams," is due largely to the vibration-proof Boots Self-Locking Nuts which protect them.

Boots Nuts are not only tough, they are also lighter than other nuts, save many pounds on each plane . . . thus allow for more cargo. In addition, they can be used and re-used as often as desired—literally "outlast the plane." Boots Self-Locking Nuts, standard for every type of U. S. aircraft, meet the exacting specifications of all government aviation agencies.

BOOTS

Self-Locking Nuts For Application In All Industries

BOOTS AIRCRAFT NUT CORPORATION ★ GENERAL OFFICES, NEW CANAAN, CONNECTICUT

in every possible way. It was at Kano that the first hangar on the route was built.

Kaduna, Minna, and Oshbogbo, refueling stops between Kano and Lagos, were merely spots in the desert. Lagos, Atlantic coast terminal of the new route, was then a growing town. Still, most of the natives had never before seen an airplane. As a result, so many crowded around that they had to be chased away with a blowtorch.

Lagos, very humid, had a serious effect on the plane. Being constructed of wood, it warped badly and the fabric sagged, and by the time the return journey was ended at Khartoum, the timbers had shrunk. Also, there was the difficulty of spares, which had to be carried in the plane. On every journey, the rear freight compartment held such things as a tire, tail wheel, cylinder, magneto, spark plugs, jacks, etc.

In the development of Britain's Empire air routes, Alexandria was a focal point. From here the route ran southward to South Africa, with its several spur lines; eastward there was to be the airway across the Persian Gulf to India, the Far East, and Australasia.

The first link, between England and Alexandria, was a relatively simple matter so far as flying was concerned. But problems, mainly political, were numerous. First of all, British aircraft were not permitted to enter Italy from France, and the only alternative was to fly across the Alps. This was considered too hazardous a flight in those days, so passengers entrained for Genoa, where they boarded a flying-boat for Alexandria.

Later on, British planes entering Italy from France were again banned from Italian ports, hence the Mediterranean crossing had to be made from Salonika, Greece. This meant a circuitous route through Central Europe, which was difficult in winter, especially in Southern Yugoslavia. In fact, the journey from Skoplje, Yugoslavia, to Salonika, had to be made by train in winter. And later again, Empire route passengers had to go from Paris to Brindisi, Italy, by train.

Similar troubles beset Imperial Airways on the first stage of the extended route from Egypt to India. As early as 1921, the RAF had begun regular service for official mail from Cairo to Bagdad.

Still using combat planes flown in World War I, the RAF made extensive air and ground surveys of the route over the Syrian Desert from Amman, Transjordan, to Bagdad. This was in some respects even more difficult than the African survey, for there are few landmarks in those sandy wastes. The ground parties, besides preparing landing strips, had to plow deep furrows which could be seen from the air. When it was decided that this link should be part of the com-



NORGREN *synthetic* INDUSTRIAL HOSE ASSEMBLIES


Heat, cold, solvent, and vibration resistant. Full line covering all requirements for high and low pressures, hydraulic and pneumatic.

Send your specifications with inquiry... including I. D. and overall length and thread requirements. C. A. Norgren Company, 220 Santa Fe Drive, Denver 9, Colorado.

Manufacturers of high quality hose assemblies and couplings for over 18 years

Norgren

Eliminates THE WEAKEST LINK

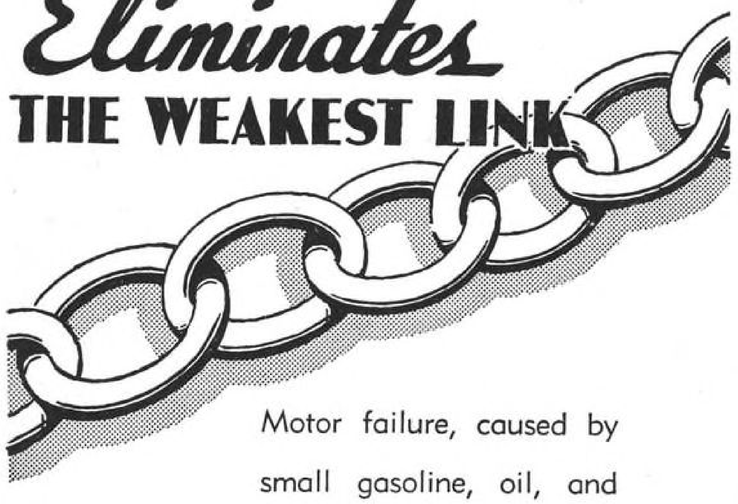

Motor failure, caused by small gasoline, oil, and power leaks, was once aviation's weakest link. When TITESEAL was developed at Wright Field, it stopped these leaks and made aviation safer.

Today, TITESEAL is in constant use by 75% of the makers of aircraft, by commercial lines, and in Army and Navy aircraft all over the world.

Always specify TITESEAL, the modern sealing compound. Made in densities to fit every gasketing and sealing need.

PERMITS EASY Disassembly

For detailed Information Write

TiteSeal

TiteSeal IS Indestructible

Division of

RADIATOR SPECIALTY COMPANY

Charlotte, North Carolina

Branches

Los Angeles, California ● Toronto, Canada

mercial air route between Africa and India, still greater work had to be done. Additional radio communications had to be established, and arrangements made for a continuous supply of fuel and accommodations for passengers had to be provided in most desolate spots, sometimes at landing grounds in the desert which were identified only by numbers.

At this time radio-telephony between aircraft and the ground had been developed in Europe. With the introduction of a telescopic mast to supplement the ordinary trailing aerial, which could not be used on the ground, and with a small power-driven dynamo, each plane became a mobile radio station able to communicate with ground stations whether in the air or on the ground.

Also, it was necessary, besides feeding passengers and providing beds and other equipment, to protect them from sandstorms and pests. At Rutbah Wells, a lonely spot in Iraq, there was an additional problem—hostile tribes. To safeguard crews and passengers a fort was built there.

It was in 1926 that Imperial Airways took over the route as a commercial proposition. The enormous difficulties of terrain and climate were matched by political problems. To reach an agreement with Persia (Iran) appeared an almost insurmountable obstacle, but finally a short term agreement was signed. It was extended beyond the set period, but then Persian authorities were reluctant to continue. Thus Imperial Airways were obliged to change the route to the Arabian side of the Persian Gulf, one of the hottest and most desolate regions in the world, along which it still runs. New landing fields had to be selected and prepared and, not the least problem, negotiations had to be conducted with local sheiks for the use and protection of the landing grounds selected.

Meanwhile the RAF pushed further along the route toward Australia. It developed the airline from Calcutta to Singapore, and in 1933 a new company, Indian Trans-continental Airways, began to operate jointly with Imperial Airways across India, and on through Burma to Singapore. The stage to Calcutta was opened in July, 1933; to Rangoon in September; and to Singapore in December. Final stage, to Australia, was placed in the hands of Imperial Airways' Australian associate, Qantas Empire Airways, and, with the cooperation of the Dutch authorities in the East Indies, the route to Australia opened on Dec. 8, 1934.

Later, Tasman Empire Airways took up the Sydney to Auckland section making a through route, Britain-New Zealand, then the world's longest commercial air route—15,000 mi. from end to end.

A passenger from England could thus



The Home Front*

By TOM TREANOR

. . . The greatest piece of transportation in this war is the Douglas DC-3 transport plane . . . (which) has won more battles than the jeep.

. . . without the DC-3 there would never have been the weblike system of military airlines all over the world . . . now known as the Air Transport Command. Without the DC-3 the Air Transport Command would have been set back a good year.

And without the Air Transport Command there's many a battle in this war would have gone slower or even completely sour.

To give one example, ever since the fall of the Burma Road the Chinese war has been supplied almost entirely by the DC-3.

Don Whitehead of the Associated Press tells me that during the Tunisian campaign 15,000 casualties were evacuated in DC-3's without the loss of a plane or a life.

A surgeon told him that a principal reason for the extremely low American battle death rate was the rapidity with which the wounded could be brought to fully equipped hospitals by plane.

During the western desert campaign Whitehead says that without the supplies which were ferried to the front by DC-3's the 8th Army's advance would have been slower and the Africa Korps could have dug itself in for determined stands instead of being nearly routed.

"We'd often see them coming over the desert in formation," he said, "flying so low they seemed no more than five feet above the ground, rising and falling with each ridge. Sometimes they'd come into advance airports while the dust of enemy bombings still hung in the air."

*"The Home Front" is a daily feature in the Los Angeles Times. The foregoing are excerpts from this column which appeared Sept. 6, 1943. Tom Treanor is literally a "self-made" war correspondent whose colorful exploits on many fronts have won him acclaim. Reference to the DC-3 also applies to the C-47 Skytrain and C-53 Skytrooper, basically identical models. This material is reprinted with the appreciation of the men and women of Douglas who build the planes Treanor praises.

DOUGLAS *Aircraft Co., Inc.*

Santa Monica, Calif.

LONG BEACH, EL SEGUNDO, AND DAGGETT, CALIF., TULSA, OKLAHOMA, OKLAHOMA CITY, CHICAGO

Member, Aircraft War Production Council, Inc.

GITS


TRADE MARK REG U. S. PAT. OFF.

SEALS PROVED... AROUND THE WORLD



Gits Oil and Grease Seals represent over thirty years of lubrication research.

Specialized research, design and manufacture of industrial Oil and Grease Seals, and Lubricating Devices have provided the solution to many problems years ahead of the times. Our war effort has hastened this research—crowding the achievements of many years into but a few—to meet the demands of ever closer tolerances and higher standards of efficiency of both mechanized units and industrial equipment. These years of scientific research have developed the intangible values that insure dependable performance under all conditions, found in all Gits Lubricators. These years of specialization have indelibly specified the name Gits wherever lubrication is an essential. Let Gits solve your problems the scientific way.

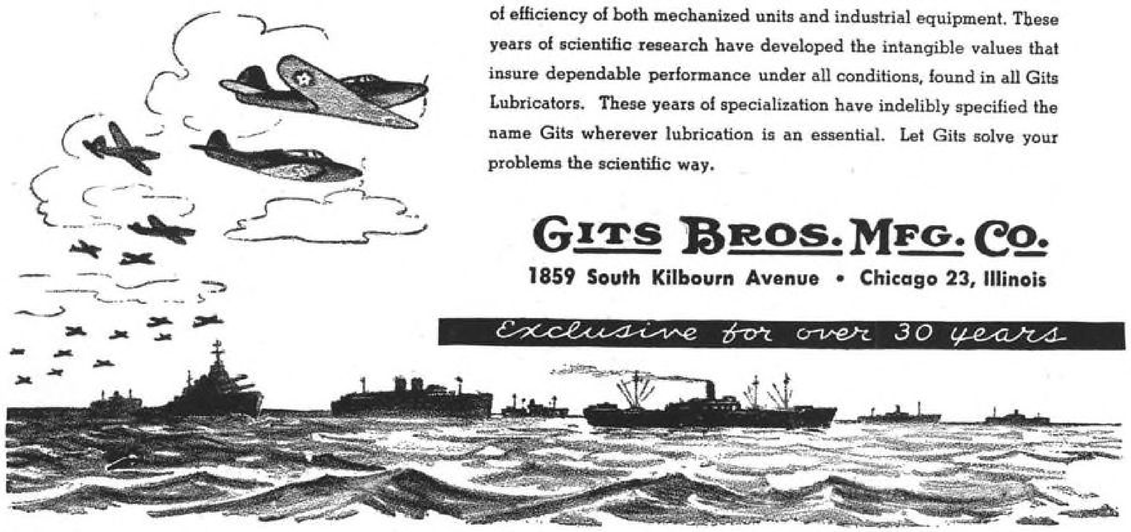

GITS BROS. MFG. CO.

1859 South Kilbourn Avenue • Chicago 23, Illinois

Exclusive for over 30 years

be in Australia in ten days. Arriving at Alexandria in the forenoon of the second day, he went by way of Tiberias, Palestine, and Habbaniyeh to Basra, Iraq. By the evening of the third day, he had crossed the Persian Gulf to Karachi, having called at Bahrein; at Sharjah, an ancient fort on the Oman coast; and Jiwni in Baluchistan. These are still regular stops on the BOAC route to India.

Across India to Calcutta were two choices of route, by flying boat via Raj Samand, Gwalior, and Allahabad, or by land plane by way of Jodhpur, Delhi, Cawnpore, and Allahabad.

Fifth day of his flight saw him at Akyab, Rangoon, and Bangkok. From the last mentioned place Imperial Airways ran a feeder line of 1,178 mi. to Hong Kong through Udorn, Thailand, Hanci, Tongking, and Fort Bayard in French Indo China.

The main route continued to Koh Samui, Thailand, and Penang Island, Malaya, to Singapore. The seventh day took the passenger to Sourabaya and Batavia, Java. Bina and Koepang, NEI., and Darwin were his calling places on the eighth day. Going along the Australian Coast by way of Groote Eylandt and Karumba, his last night-stop was at Townsville, with Sydney being reached the tenth day.

Thus were Britain's overseas air routes developed. After that first flight on Coronation Day in 1911, air routes grew which covered most of the British Commonwealth. The present war has checked development of British air transport, mainly through the shortage of modern transport aircraft, due to first preference being given to combat planes. But some new routes have been opened to serve the needs of the war.

The enterprise which characterized the opening of the routes from England to South Africa and the Antipodes stood Britain's Merchant Air Service well in wartime. When the Mediterranean was closed to civil flying, a new 5,000 mi. route from Britain to West Africa was opened on a few hours' notice to connect with the Trans-African route. The North Atlantic flying boat service, started just before the war began, was continued despite the ban on radio aids and the giving of weather information; some of the pilots went in Nov. 1940, to Canada to organize the ferrying of American-built bombers across the Atlantic, and finally to operate a two-way ferry service between England and Canada.

This service, still operated by the British Overseas Airways across the most difficult winter route in the world, has been the outstanding achievement of British civil aviation in wartime.


Today, British Overseas Airways Corp. operates some 40,000 mi. of routes. Since the beginning of the war, the corporation has ceased to operate as a com-



PAN AMERICAN

Likes the Clare "Custom-Built" Idea

Pan American World Airways chose Clare Relays for their aircraft radio equipment. The relay illustrated was "custom-built" to meet Pan American's demand for a relay that would withstand extreme vibration, that was sufficiently rugged to resist shock, and that would insure absolute dependability and long life.



Illustrated is Clare Type K d.c. Relay. Weight: approximately 1⅔ ounces.

Clare "Custom-Built" Relays for applications where vibration is a factor employ a "fatigueless" beryllium copper hinge. This allows a simple, compact unit that insures uniform armature movement up to millions of operations . . . no special anti-vibration springs are needed . . . no bearings to chatter and wear.




Strong, hard, long wearing Bakelite bushing insulators resist vibration and heavy contact pressures.

Clare "Custom-Building" means that the relay you use is designed and constructed to meet the requirements of the job to be done. If your engineers are looking for the better, quicker, easier way to solve design problems which involve the use of relays, they will be quick to see the advantages of Clare "Custom-Built" Relays.



Heelpiece and coil core of magnetic metal, carefully annealed.


Ask for the Clare Catalog and Data Book. C. P. Clare & Co., 4719 Sunnyside Avenue, Chicago (30), Ill. Clare engineers in all principal cities. Cable address: CLARELAY.



Hinge of "fatigueless" beryllium copper insures long life under vibration.


"Custom-Built" Multiple Contact Relays for Electrical, Electronic and Industrial Use

CLARE RELAYS

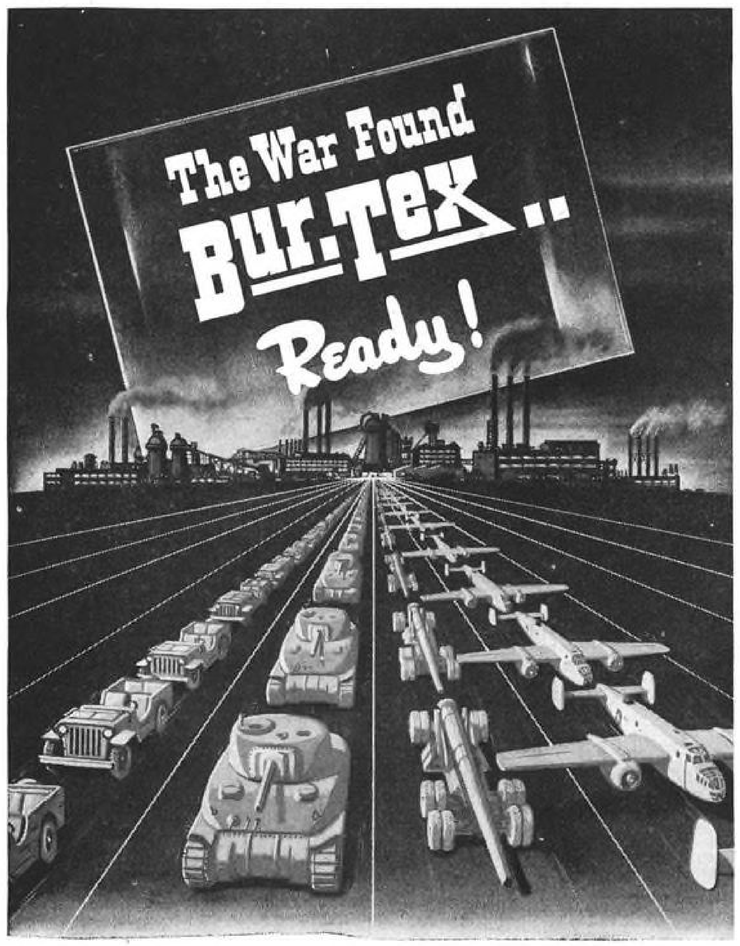

When tremendous wartime demands caused supplies of rubber and other materials to dwindle rapidly, BUR-TEX *impregnated* felt fabrics got the chance to prove their amazing versatility. From far and near came appeals for new fabrics that would solve the problems of companies on war production — a material for catwalks on bombers, linings for planes that must have vibration and sound deadening qualities and provide insulation at the same time. Also gun blast blankets for planes, mats and gaskets for jeeps, crash pads for tanks and scores of other applications. *All* these problems were solved with BUR-TEX fabrics — some of them requiring the development of entirely new combinations of felts and impregnated felts.

The same manufacturing facilities — the same experience, research and ingenuity that solved these problems — are available to develop and perfect new-type felt fabrics and impregnated felts for your wartime needs — or to aid you in "getting set" for post-war production. Write for colorful, illustrated brochure — "The Interesting Story of BUR-TEX" — featuring the famous BUR-TEX "200" Line of impregnated felts.



Patent No. 2327573

All BUR-TEX impregnated felts in the "200" line are available with one side embossed in leather-like or other designs — or with smooth face on both sides.

BURLINGTON MILLS
INCORPORATED
BURLINGTON · WISCONSIN

mercial concern, being entirely at the disposal of the Secretary of State for Air, and functioning as a service of His Majesty's Government, carrying urgent traffic needed for the country's war effort. Very few fare-paying passengers are carried—none at all on either of the Atlantic routes.

AA's Propeller Shop "Keeps 'Em Turning"

(*Continued from page* 208)


electric sander using No. 180 "Lightning" paper. This process removes all scratches, etc., excepting circular pits, which are disregarded because they do not affect the blade in any way. In order to keep an extremely close check on the weight of the blade during this grinding, the blade is mounted on a weighted arm, which balances at the correct weight of the blade. This permits a running check on the weight of the blade as the work progresses.

During this time the thickness is measured at each station when it is reached by the grinder. After the entire surface is rough ground, the blade is removed from the balance and accurately weighed on a platform scale beside the bench. If the weights of all blades are not the same, further grinding may be required. The surfaces are then given a smooth grind with No. 320 "Lightning" paper and buffed to a high polish. This operation is performed under an exhaust hood which draws off all dust and safeguards the mechanic. Polished blades are kept in a rack located sufficiently high above the floor to obviate any danger of damage from contact with moving objects.

Parts Routing

Parts other than the blades are cleaned and then given a close visual inspection (Fig. 6). After this, the Magnaflux is used to detect cracks or hidden defects. The date of the Magnaflux inspection is etched on the spider and the two halves of the hub. Any parts requiring plating are sent to the department handling this work.

During first assembly, the spider and barrel are checked for concentricity. Maximum tolerance is .004 in., but if the parts are *measurably* off center, the difference is taken up by means of shims. This also entails shimming the blades in the opposite direction to restore the over-all balance. This balance is checked (Fig. 7) as often as is considered necessary during the entire assembly operation. If added weight is required, washers are added inside the hollow shank of the blade, any number up to nine being permitted. If a difference in weight, less than that of a washer is

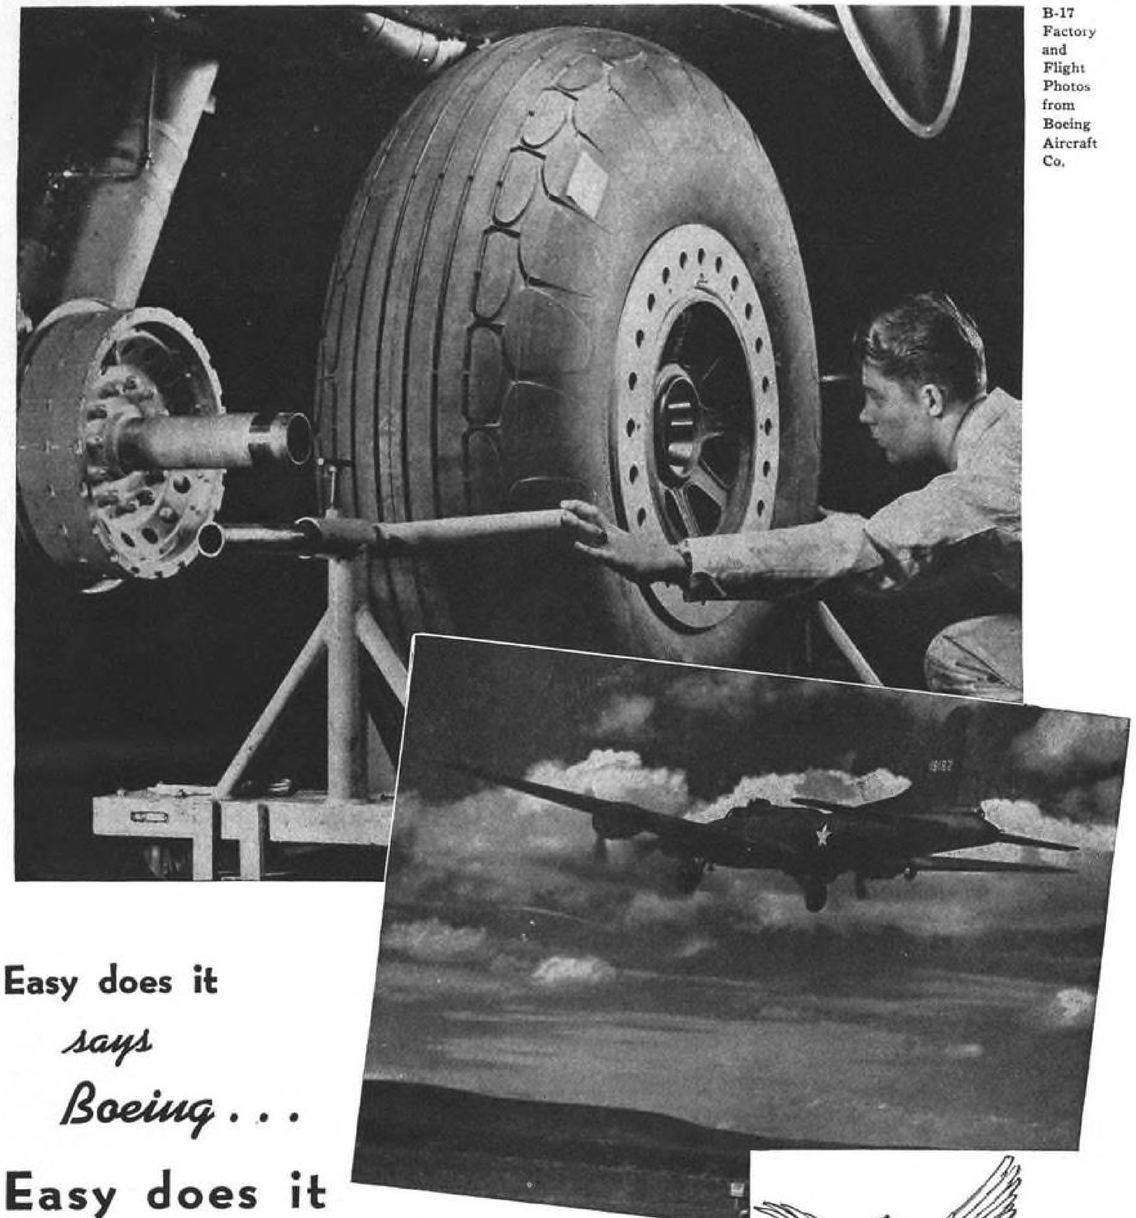

B-17 Factory and Flight Photos from Boeing Aircraft Co.

Easy does it
says
Boeing . . .
Easy does it
says the Pilot

From factory to field to sky—"easy" is the word for assembly, maintenance and landings with Hayes Wheels and Brakes.


On Boeing Flying Fortress and Consolidated Liberator —on every U. S. 4-engine bomber, as on thousands of other Army and Navy fighting and training planes, on air transport and airline ships—you'll find Hayes equipment the standard for accurate ground control.

Representatives: { Western: Airsupply Co., 5959 W. 3rd St., Los Angeles
Eastern: J. Henry Reisner, Hagerstown, Md.

HAYES INDUSTRIES, INC. JACKSON, MICH., U.S.A.

HAYES
AIRCRAFT
WHEELS AND BRAKES

NO MANPOWER PROBLEM here!

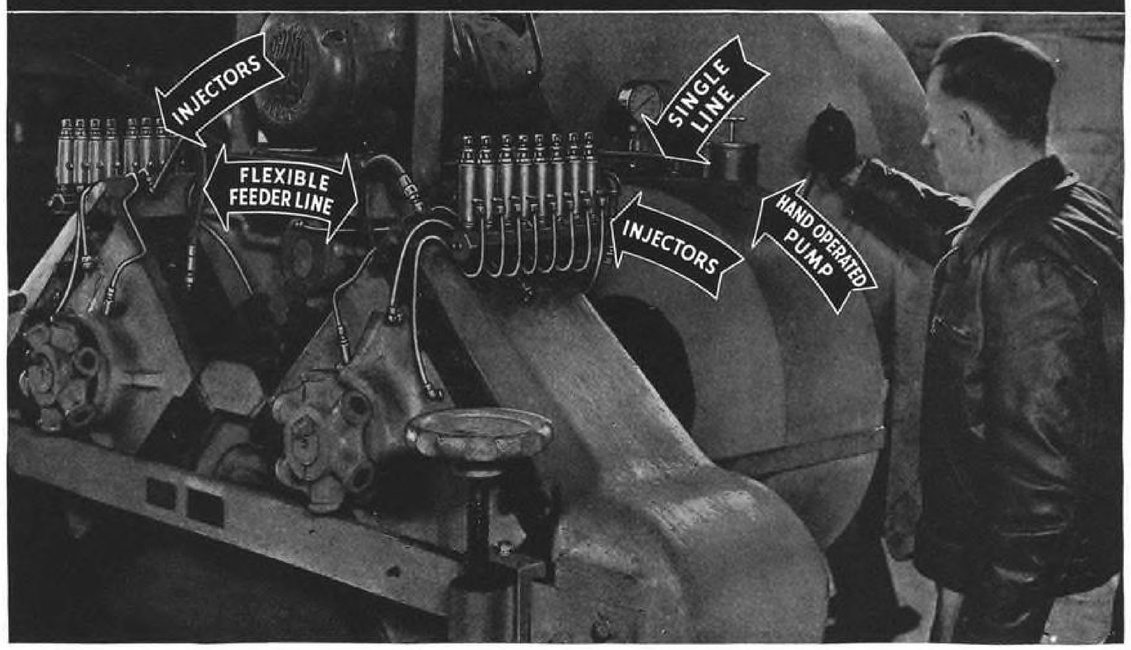

War Production Can Be Kept Going At Top Speed!

. . . Now instead of requiring a long shut-down, a machine can be kept running, and *all* bearings lubricated with a few strokes of the pump . . . It's possible when the machine has been equipped with a

LINCOLN
CENTRO-MATIC LUBRICATING SYSTEM

It doesn't take a large force of service men to lubricate machines equipped with Lincoln Centro-Matic Lubricating Systems . . . Under this modern method one man can do the whole job in a fraction of the time it would take several men to contact each individual bearing.

Illustration above shows a Lincoln Centro-Matic System installed on an angle shear.

A Centro-Matic System consists of a number of Centro-Matic Injectors—one for each bearing—and a power operated or a hand operated Centro-Matic Lubricant Pump. A power operated system can be either time clock control or push button control . . . The injectors can be grouped in manifold or located separately at each bearing. In either arrangement only a single lubricant supply line is required . . . Easily installed on new or old machines.

ARMY E NAVY

The ARMY-NAVY PRODUCTION AWARD for high achievement in the production of war equipment, conferred upon the Lincoln Engineering Company has had a star added. This star symbolizes 6 more months of exacting service to our Armed Forces, delivering vital material so necessary for ultimate Victory.

Write today for complete information.

143-19

FOR VICTORY BUY UNITED STATES WAR BONDS AND STAMPS

LINCOLN ENGINEERING COMPANY

Pioneer Builders of Engineered Lubricating Equipment

ST. LOUIS, MO., U. S. A.

required, small lengths of lead wire are placed inside the hollow bolts which connect the halves of the hub.

After balancing and oil-sealing, the assembly is once again tested for concentricity. Torque and pitch readings are then taken and recorded, and the propeller is covered and placed on a storage stand until it is to be used.

Review of Patent

(*Continued from page* 189)

Rifles by Chute. This patent concerns manner of arranging parachute pack to hold rifles so they will not be damaged in dropping. Pack consists of a heavy padding layer and a carrying layer, and rifles are laid across two layers at spaced intervals, after which edges of material are folded over rifle ends. Whole device is then rolled.—2,327,359, filed Sept. 30, '41, patented Aug. 24, '43, F. G. Manson and J. J. Maskey.

Rotor Speed Control of two auto-rotating rotors in an autogyro is subject of this development, where rotors are connected by means of a differential so that faster movement of one will effect pitch setting of other to bring speed of latter up toward that of former.—2,327,370, filed May 25, '40, patented Aug. 24, '43, C. G. Pullin, assigned to Autogiro Co. of America.

Flap Invention. This is for plane with monocoque wing construction having flap designed to act under all conditions of stress. Elastic connecting elements are incorporated to prevent bending stresses of wing from binding flaps against hinging movement. Elements are positioned so that there is at least one between each flap hinge pair.—2,329,133, filed Apr. 9, '41, patented Sept. 7, '43, G. P. Peed, Jr., assigned to Douglas Aircraft Co.

Steerable Landing Gear incorporates tricycle undercarriage with nose wheel controllable by pilot and so mounted that landing gear shimmy is eliminated. Wheel, which is retractable, has shock absorbing cushion mounting.—2,329,168, filed May 21, '40, patented Sept. 7, '43, J. B. Wassell et al, assigned to Vega Aircraft Corp.

Nose-Wheel Mounting. This concerns tricycle landing gear with specific design for mounting of a castered wheel. Shock absorbing means is provided, and castering device has positive centering means to prevent shimmy of undercarriage.—2,329,441, filed July 21, '41, patented Sept. 14, '43, S. M. Parker, assigned to Automotive Products Co., Ltd.

Dual Brake Device for trainer planes is arrangement to prevent student from applying full braking force to landing wheels and cause nose-over. Meantime device permits instructor to apply full force when needed.—2,327,427, filed Apr. 24, '40, patented Aug. 24, '43, C. Hollerith, assigned to Hayes Industries, Inc.

(*Turn to page* 295)

From the Test of War Comes the Better Headphone

. . . Permoflux DYNAMIC



Permoflux Engineers, through the control and development of new techniques, have literally carried headphone performance from the laboratory right into the battle areas themselves. The extra sensitivity, wide frequency response and high overall operating efficiency of Permoflux Dynamic Headphones make possible improved intelligibility of vital messages under the most adverse noise level conditions. Today they are helping our boys win Victory — tomorrow they will be available to all.

Back the Attack with ***WAR BONDS!***


TRADE MARK

PERMOFLUX CORPORATION

4916-22 W. Grand Ave., Chicago, Ill.

PIONEER MANUFACTURERS OF PERMANENT MAGNET DYNAMIC TRANSDUCERS

ONE PLACE WHERE YOU CAN'T FORECAST THE WEATHER

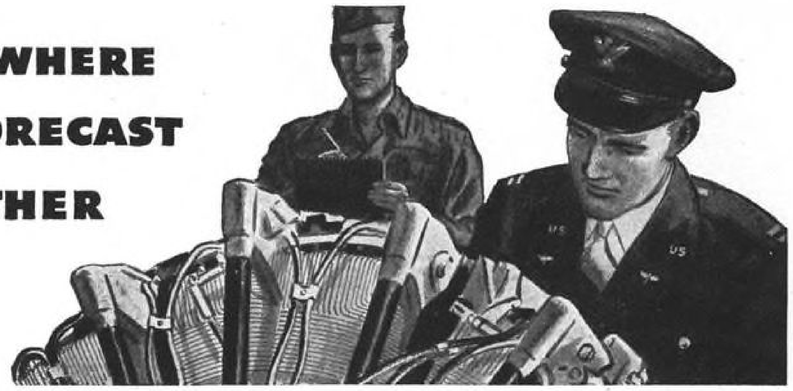






1. When the U. S. first began to ship aircraft engines all over the world, the "weather" inside those engines was a big problem. It was completely unpredictable. Condensation was apt to form at any time. And when it did, engines rusted.

Immediately a request went out for a preventive that would stop rust and also neutralize acids caused by fuel residues left over from test runs. They got what they wanted. Union Oil Company came up with a product called Stop Rust B that can deliver a motor in "factory-perfect" condition to Africa, Salamaua, or the Aleutians. **It meets specifications AN-VV-C-576 a** and is used in large quantities by the armed forces today.

2. Stop Rust B contains special compounds diluted with a top-notch lubricating oil. It is a preferential wetting agent that covers and protects metal surfaces completely. It won't drain off for months. It stays put as long as the engine is idle, neutralizes acids, keeps water away from metal surfaces. *It effectively prevents rust and corrosion!*



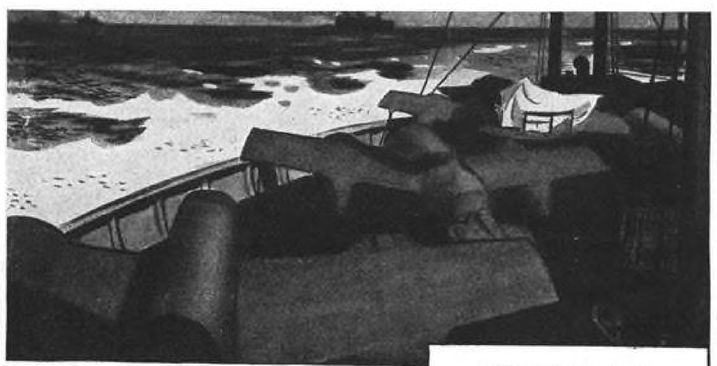

3. Stop Rust B has another important feature. It leaves no harmful residue when engines are put back into service. No flushing is necessary. The residue actually improves the lubricating oil—gives it a "break-in" quality.

4. So if you ship aircraft engines or other equipment that requires internal protection against rust and corrosion, get in touch with Union Oil Company of California by phone, wire, or letter. Stop Rust B can be supplied in 53-gallon barrels or bulk.

UNION OIL COMPANY
OF CALIFORNIA
Los Angeles
Portland · Seattle · Honolulu
San Francisco · New York
Juneau · Balboa · Vancouver

Plane Window Construction. Here, fuselage frame is so formed that relocation of window openings will not lower strength of craft. This is accomplished by providing a longitudinal beam above and another below window line with structural members connecting beams between windows. Patent states relocation of latter will then not affect strength of framework.—2,327,636, filed Feb. 20, '40, patented Aug. 24, '43, J. Gerber, assigned to Lockheed Aircraft Corp.

Air Conditioning Apparatus. Improvement is for stratosphere pressure cabins of planes. Heat exchanger is positioned in wing, and airflow through it is created by slipstream as plane flies. Arrangement is stated to permit use of large heat exchanger without sacrifice of vital space.—2,327,737, filed Mar. 5, '41, patented Aug. 24, '43, T. S. Pendergast, assigned to Universal Cooler Corp.

De-Icing Arrangement. Here, series of tubes extends along leading edge of wing, and portion of exhaust gases from engine passes through tubes. In turn, some of this gas escapes both on under and upper wing surfaces to act against icing.—2,328,079, filed Mar. 26, '41, patented Aug. 31, '43, J. Goodmon.

Prescriptions For Head Cracks


(*Continued from page* 143)

and rivets were heat-treated at 920 deg. F. for 30 min., quenched in cold water, stored in ice water, and driven immediately upon removal from the ice water. Five different diameters of flat driven heads were used, and no head cracks were found in any rivets. Five specimens were prepared for each sheet thickness and head size. After aging one week at room temperature, the joints were tested in the 40,000-lb. Amsler machine using Templin grips.

Results of these tests (Table III and Fig. 7) indicate clearly that a reduction in size of driven head is accompanied by a reduction in ultimate strength of the joint whether failure is in the rivet or in the sheet. A study of the types of failure encountered, together with a comparison of the stresses developed with the normal capacities of the rivets and sheet to withstand shear and bearing, leads to the conclusion that the diameter of the driven head should not be less than 1.3 times the nominal shank diameter. In fact, if the d/t (diameter of rivet/thickness of sheet) ratio is greater than about 4, it appears that head diameters of 1.3 and even 1.4 times the shank diameter may be inadequate to prevent early failure in single-riveted lap joints.

Conclusions

Judgments based on the results of the various tests of $\frac{1}{8}$-in. and $\frac{1}{4}$-in. 24ST

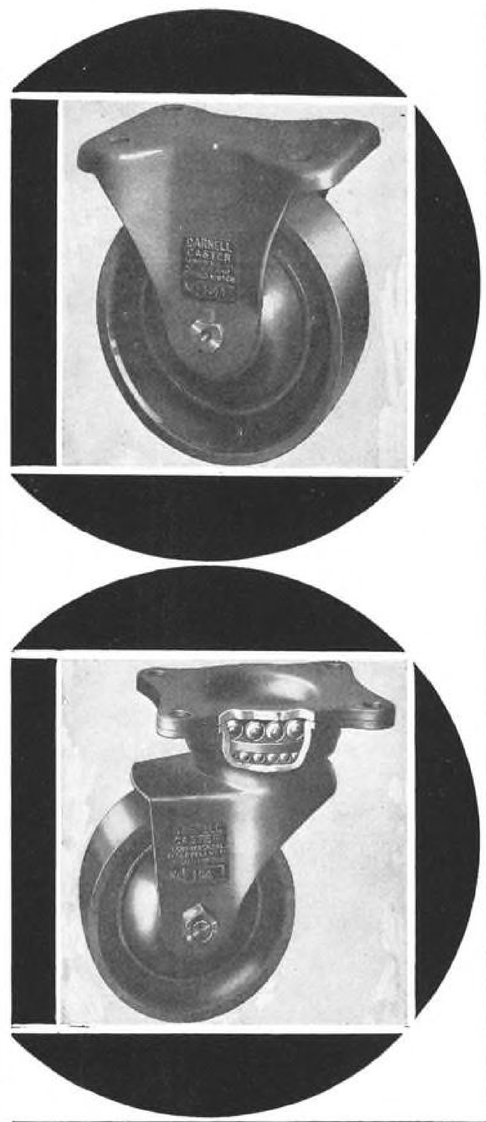

DARNELL CASTERS

DARNELL CASTERS & WHEELS
"Reduce the Overhead that is Underfoot." Minimum floor wear, maximum efficiency, durable service commend them to you.

DARNELL CORP. LTD., 60 WALKER ST., NEW YORK, N.Y.
LONG BEACH, CALIFORNIA, 36 N. CLINTON, CHICAGO, ILL.

THE PRESSED STEEL COMPANY

Manufacturers



CARBURIZING BOXES

ALLOY RETORTS

ANNEALING COVERS

HEAT TREATING BASKETS

PICKLING, DIPPING AND ANNEALING TUBES

ALLOY EXHAUST MANIFOLDS

TUMBLING BARRELS

SEAMLESS STEEL CYLINDER CAPS

CYLINDER NECK RINGS

PICKLING RACKS

TUBE ASSEMBLIES

THERMOCOUPLE PROTECTION TUBES

HEAT TREATING EQUIPMENT

THE PRESSED STEEL COMPANY
of WILKES-BARRE, PENNSYLVANIA

DETROIT: 312 Curtis Building • TOLEDO: 606 Nicholas Building
CHICAGO: 1915 Engineers Building • NEW YORK: 254 West 31st Street
TORONTO, CANADA: A & M Accessories Ltd., 19 Melinda Street

PRESSED STEEL COMPANY PRODUCTS: Carburizing and Annealing Boxes, Thermocouple Protection Tubes, Seamless Steel Cylinder Caps, Seamless Steel Neck Rings, Welded Alloy Tubing for High Temperature and Corrosive Application, Radient Tubes, Inner Covers and Base Sheaths for Steel Mills

rivets described herein, are as follows:

1. Aireraft rivets of 24ST, heat-treated within the specified limits of 910 deg. to 930 deg. F. and driven with flatheads having the commonly used diameter of 1½ times nominal shank diameter, may be expected to develop shear cracks in the driven head if the interval of room temperature aging between heat treating and driving exceeds 5 to 15 min.

2. Such head cracks, however, do not adversely affect the static tensile strength, the static shear strength, or the shear fatigue strength of the driven rivets. Furthermore, the resistance to corrosion is not appreciably reduced. Only valid objection to such head cracks would seem to be the poor appearance of the cracked heads. Therefore, cracked-head rivets should seldom be replaced, particularly when the cracked heads are in an inconspicuous location in the finished structure.

3. All heat-treating and reheat-treating of 24ST rivets should, of course, be done at temperatures within the specified temperature range of 910 deg. to 930 deg. F. Use of temperatures below this range, while reducing the tendency for head cracking, lowers the shear strength and may adversely affect the resistance to corrosion of the 24ST rivets.

Use of temperatures above this range promotes head cracking, lowers resistance to corrosion, and, if carried far enough, may cause quench cracking, grain-boundary melting, and reduced shear strength.

4. To minimize head cracking, the interval of room temperature aging between heat treatment and driving should be held as short as possible by refrigerating the rivets immediately after quenching and by transferring them from the refrigerant to the work without delay. Increasing the interval of room temperature aging increases the pressure required to drive and the tendency for head cracking without any pronounced beneficial effect on the shear strength of the driven rivets.

5. Decreasing the diameter of the driven head of a rivet decreases the tendency for head cracking but may also decrease the shear strength of the rivet and its resistance to being pulled through the hole in lap joints in thin sheet.

In any lap joints in which the sheet thickness is not less than ¼ the shank diameter of the rivet a reasonable balance between cracking tendency and rivet strength seems to be achieved if the diameter of the driven head is about 1⅛ times the nominal shank diameter. In joints in which thinner sheets are used, a somewhat larger diameter of driven head up to about 1½ times the nominal shank diameter may be desirable.





Years of aircraft service have proved the reliability of Ohmite Units. Designed and built to withstand shock, vibration, heat and humidity... these Rheostats and Resistors "earned their wings" through consistent performance under all types of operating conditions. They serve in instrument controls and in communications equipment... from the arctic to the tropics, from sea level to the stratosphere. They're "On Duty" on combat, bomber, training and transport planes... and in the tools of production, too.

Ohmite Rheostats provide permanently smooth, close control. Ohmite Resistors stay accurate, dissipate heat rapidly, prevent burnouts and failures.

These same units will be well qualified to serve in the greater air age to come.

Approved Types for Army and Navy Aircraft.

OHMITE MANUFACTURING COMPANY
4945 FLOURNOY STREET • CHICAGO 44, U.S.A.

Send for Catalog and Engineering Manual No. 40

Write on company letterhead for this helpful 96-page guide in the selection and application of rheostats, resistors, tap switches, chokes and attenuators.

Engine Control Simplifies Piloting

(*Continued from page* 258)

the maximum power output obtainable without detonation as a function of spark advance, while Fig. 7 shows the form of the relationship between specific fuel consumption and spark advance.

A current engine of the type for which these curves were drawn would employ a constant spark advance of about 25 deg. for all parts of the operating range. This also happens to give undesirable "kick-back" tendencies during starting. An additional cam and lever arrangement could be made to give an automatic spark advance which would provide a retarded spark for starting and idling, a high advance in the cruising range, and a progressively smaller advance for the higher power outputs. An arrangement of this sort has been included in the design of one control mechanism.

While it may seem that these additional cams and levers would give a very complicated control, the actual device would be fairly simple. The cams and levers could be placed side by side on shafts *A* and *B* so that a compact unit would be obtained. Such a unit should not only relieve the pilot of a great deal of work but should also give improved airplane performance.

Simmonds now has in development more advanced designs incorporating some of the above mentioned features.

Plant-Within-Plant For Peak Production

(*Continued from page* 163)

els to a 30-in. engine lathe, Doall saws, routers, band saws, shapers, drill presses, milling machines, jig borers, grinding machines in pedestal and portable models, punch presses, forming presses, shears, power brakes, die filing machines, power beading machines, and a full line of bench and hand tools.

A simple job may be handled by one man, reception of the order to the finished tool, part, die, or whatnot. On a critical job when the emergency is urgent, as many as six or seven men will team up to take the work through in a hurry.

Flexibility is the keynote of the entire department, regardless of the various operations needed, the number of men required to meet the demands of a deadline, or the type of material that must be worked. There is flexibility, also, in the tolerances to which the work is held. They will vary from .0001 on the manufacture or repair of a precision tool to a wide latitude on a rough form carved out of a block of wood. Expediency and the requirements of the job determine the material to be employed and the tolerances to be worked.

In the nine general classifications into which the work falls there is enough variety to satisfy any man's urge to escape the monotony of routine. Production tools made for other departments include those intended for permanent use, temporary units to bridge the time lag required for building permanent new tools, and jigs and fixtures which may be either temporary or permanent.

Tools, jigs, and fixtures made for the experimental first-runs on new production set-ups enable the tooling and methods division to try out new ideas before freezing the methods and tools on the production line for mass output. Templates for pioneering jobs are likewise experimental in nature and are generally made of inexpensive materials for temporary use only.

Emergency repair of machine tools in any part of the plants is an especially important activity of the department. If the break-down has occurred to a key machine, no time can be wasted in getting it back into operation. The

Castolin Eutectic®

EUTECTIC*
(Means Lowest Binding Alloy)
LOW TEMPERATURE WELDING



FREE LATEST
WELDING DATA BOOK

Contains the Answers to Hundreds of Wartime Welding Problems

Contains vital facts to speed up your production and cut your welding costs with Eutectic Low Temperature Welding. Also valuable information on:

Production Welding
Joining dissimilar metals and dissimilar gauges without burning • Design simplification • Substitution of butt joints for lap joints, etc.

Salvaging Defective Castings
Effectively at low cost • Completely machinable, invisible welds • Ideal for thin walled or heavy castings in all metals.

Maintenance Welding and Tool Salvaging
"Hard-to-get" tools costing up to $180 and requiring up to 50 weeks for delivery, salvaged for re-use in a few minutes at a cost of but a few cents.

Ordnance Plant Engineer writes: "Book very instructive, send ten more for distribution."

Write for Welding Data Book S

See our Exhibit at the
19th Exposition of Chemical Industries
BOOTH No. 403
Madison Square Garden, N. Y. Dec. 6-11
*Reg. U. S. Pat. Off.

EUTECTIC
WELDING ALLOYS COMPANY
Originators of the Low Temperature Welding Process
40 WORTH STREET, NEW YORK, 13, N.Y.

EUTECTIC WELDING ALLOYS COMPANY
40 Worth St., N. Y. 13, N. Y. S
Please send your latest Welding Data Book
Name_____
Company_____
Address_____ City_____




TO OUR WORKERS GOES THE CREDIT

Reliable AIRCRAFT QUALITY

In this struggle of freedom against tyranny—labor and leadership have one common task. By the volume and quality of our wartime production, we will prevail over our enemies. Our adversaries also have stout (if not willing) workers, directed by overlords of Satanic genius. But American industry—management working hand and glove with shopworkers—is turning the tide of battle in our favor.

We salute the stout-hearted men, and the courageous women, not only of Reliable, but of thousands of other busy plants, as *real* liberty-loving guardians of America. We entrust to them, together with our armed forces, the precious future of our children, our homes, our country. We know they will not fail.



Today, Reliable Springs go 100% into combat and essential industrial equipment. Tomorrow, Reliable Springs will ably serve your normal needs. Whether you are at work on war products now, or planning for future peace-time requirements—send us your specifications and blueprints, or let us help you formulate them.

THE RELIABLE SPRING & WIRE FORMS CO.

3167 Fulton Rd., Cleveland 9, O. *Representatives in Principal Cities*

YOU CAN RELY ON Reliable Springs

ROUND AND FLAT WIRE SPRINGS · CLIPS · HOOKS · BENDS · LIGHT STAMPINGS

time scheduling of a production or an assembly line is so precise that even a day's delay may seriously disrupt the flow of production.

The manufacture of temporary new tools for the first test runs of company-designed production and assembly tools is one of the more challenging duties of the department, calling as it does for ingenuity and long experience in solving mechanical problems. Here, precision is a major requirement.

Emergency die work may involve two phases: The quick forming of a temporary die to maintain production during the time needed for repairing the die or cutting a new one, and the repair or cutting of the new die. It may even involve making a few parts in the department to bridge the time gap necessary for devising a temporary die.

Because making spare parts for current models, or building repair parts for older models out of active production would interrupt the required rhythm of regular production lines, most of this work is routed into the miscellaneous parts department. The run may be for only one or two parts, or it may be for two or three hundred.

Salvage work also is a challenge to the ingenuity of the department. There are three divisions to this operation: First, salvage of parts damaged in production; second, salvage of parts, fittings, or fastenings orphaned by changes in design; and, third, salvage of parts, fittings, or fastenings misworked by other departments or by subcontractors.

An example of the latter is the part in which the subcontractor drills and threads only five holes out of six. To save transportation and time, this piece is sent to miscellaneous parts for the drilling and tapping of the sixth hole.

In trying to describe the operations of their departments, the two foreman start out by saying, "Well, we do a little bit of everything." And they end up by advising, "Look, why don't you just walk around and see for yourself."

The answer is "Gladly!"—for there are no dull moments at "Little CV."

Feeder Airline's Place In Postwar America

(*Continued from page* 117)

Nor can there be any argument that pickups involve more risk from a safety standpoint. All American has made well over 200,000 pickups without a single accident that could possibly have resulted in injury to passengers, had they been on board. During the same period, it did suffer some difficulties while making a far less number of landings on large airline terminal airports.

Our studies indicate that in most parts

CORRECT DESIGN!



Tests like this help to maintain the extreme accuracy of "PAR" PACKINGS


In a hydraulic packing, correct *design* and *size* are on less important than correct composition of the material. And maintaining correct design—as the drawing below clearly shows—involves producing packings with every angle and dimension held to extremely close limits. Hence the meticulous care exercised in every step of the manufacture of "PAR" Packings.

For example, when a new mold is made, every cavity in it is tested by cutting thin cross-sections from sample moldings and examining them on the micro-projector illustrated above. This apparatus magnifies the section 20 to 50 diameters and projects the image against a proportionately large scale drawing for comparison. The same method is also employed for periodically checking all molds in use.

Even with mold accuracy thus assured, every "PAR" Packing is carefully precision ground and must pass a rigid inspection before it is ready for shipment.

Right now a great deal depends upon the accuracy and correct design of "PAR" Packings . . . for millions of them are going into the vital hydraulic actuating cylinders, struts, emergency hand pumps, etc., of our country's fighting planes and bombers.


While supplying Uncle Sam's requirements is a man-sized job, our engineering department is now able to find time to work with designers or manufacturers planning new products calling for dependable hydraulic pressure seals. We invite your problems. LINEAR PACKING & RUBBER CO., State Road & Levick Street, Tacony, Philadelphia 35, Pennsylvania.



LINEAR "PAR" PACKINGS

"...man your planes"



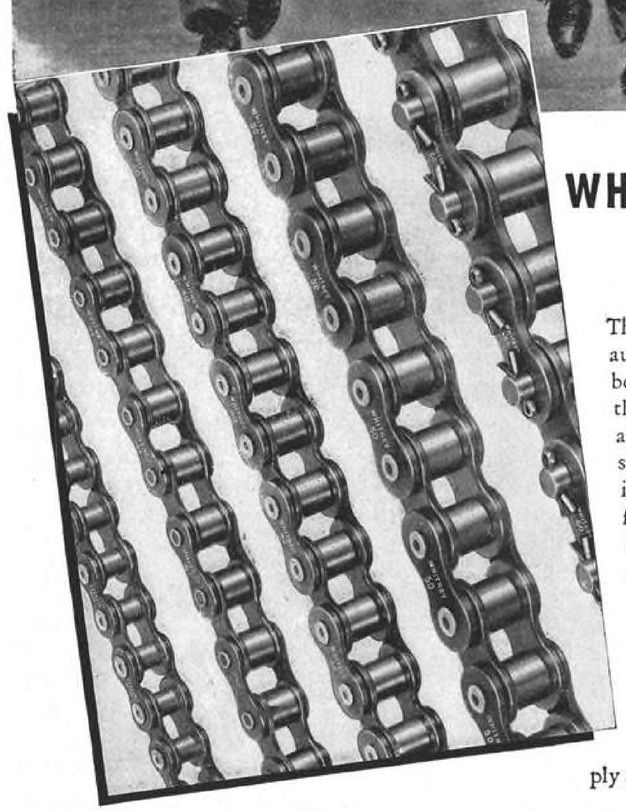

WITH

WHITNEY AIRCRAFT CHAINS*

on all vital mechanisms and controls

The "mechanical crew" of a military plane . . . automatic pilot, turret drives, power plant controls, bomb displacement gear, and other components . . . these should be picked for the same qualities by which are picked the men who use them: dependability, speed of reflex, and plenty of plain guts in tough going. So into these mechanisms and controls, on many famous planes, Whitney Chains and Sprockets are chosen to translate the crew's commands into *positive, instant action.*

And today there is an added advantage to the specification of Whitney Chains . . . the direct, personal contact with engineers of The Whitney Aviation Division, through which are placed at your disposal all of Whitney's technical and manufacturing resources, to focus directly on your problems. Simply say when you wish to see a Whitney engineer.

***PRODUCT OF AVIATION DIVISION of THE WHITNEY CHAIN & MFG. CO.**

HARTFORD 2, CONNECTICUT

of the United States, the average distance between points deserving feeder air service will be about 17 mi., with approximately 20 communities on each route. In the beginning, suitable landing places probably would be available at only one-half or one-third of these points. Moreover, it would not be necessary to land unless these were passengers to be taken on or off, since a strictly mail-express load could be handled with the pick-up mechanism.

This computation reduces the number of landings to be made on the average feeder line route to probably one for each four communities served, or about every 60 to 70 mi. A most satisfactory air service could be maintained on a schedule of this nature with the proper equipment.

But this might only be temporarily—for the history of air transport shows that after a line has been in operation for a comparatively short period of time, additional cities along the route establish airports in order to gain the benefit of passenger service. If it is presumed this also would happen on feeder routes, landings would become progressively more frequent until, as a few simple statistics conclusively show, it would become imperative that feeder planes avoid spending many minutes on the ground for each landing.

For example, if a plane with a 150 mph. cruising speed lands every 50 mi., and requires 15 min. for each landing (as do present day trunk airliners) its scheduled speed would fall off to only 85 mph. In order to maintain the satisfactory scheduled speed of 120 mph. under the same conditions, the plane would have to cruise at 300 mph.

On the other hand, the plane with a 150 mph. cruising speed could maintain a scheduled speed of 120 mph. over the same route if the time per landing could be reduced to only 5 min.!

This makes it obvious that the most promising approach to the problem of maintaining good cruising speeds on feeder airlines is not the usual one of trying to build faster airplanes. Rather, it is attempting to get planes through scheduled stops with a maximum loss in time of 5 min.

This can be done. But to get optimum results it will be necessary to incorporate certain features into the design of both the feeder airplane and the airport.

First, let us consider the airport. Our present-day ports have an historical background, for they are largely the result of many years of experience with types of aircraft unsuited for cross-wind operation. Early aircraft, it will be remembered, did not have brakes: consequently, it was necessary that all landings be made directly into the wind. This required an airport where a maximum length of run for a landing or a takeoff could be had in any direction.

With the increase in the wing loading factor in aircraft design, thus requiring longer takeoffs and landing runs, it has been necessary to expand airports in all directions so that runs still could be made directly into the wind. These requirements have increased the size of today's airports until they have become cumbersome and unwieldy things, far too expensive for a city to establish and maintain (a cost which air transport eventually will have to pay) and far too big to get an airplane in scheduled operation through them without a serious loss of time.

Does 15 min. lost per landing sound like an exaggeration? Let us run through a mythical landing, then decide:

Approaching the airport, it is necessary to circle to follow the traffic pattern. If this circle usually is big, it is partially so because the airport also is big. Remaining in traffic, the circle is followed until the down-wind side of the airport is reached and the ship can come in to land.

It is seldom possible to land close to the loading and unloading facilities, because of the necessity for staying in the proper line of traffic and also for using the runway that is into the wind at that

RUSH DELIVERIES can be made on TURNER STANDARD STEEL *Plug* GAUGES!


Now your rush orders on Turner's standard steel plug gauges can be delivered within a few days—that's how Turner has stepped up their production to meet your demands for faster delivery. And here is how to order them by giving us the following information: 1. Diameter; 2. Length of gauging surfaces; 3. Tolerance or accuracy; 4. Hardened alloy steel or chrome; 5. Number of members—Go, Not Go, Handles; 6. Complete marking instructions.



33⅓% discount off list prices!

Prompt delivery can be made on rings, snaps, flush pins and built-up gauges too. For the latest delivery dates write us today.

FAST DELIVERIES ON THESE TOO!

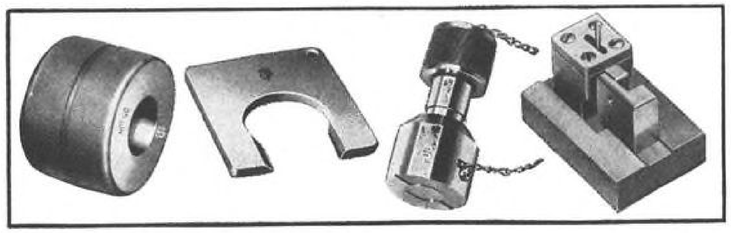


Wire your order today

or PHONE DETROIT, ELMHURST-6969

TURNER BROTHERS

TURNER GAUGE GRINDING COMPANY

2627 HILTON ROAD • • • • FERNDALE, MICH.

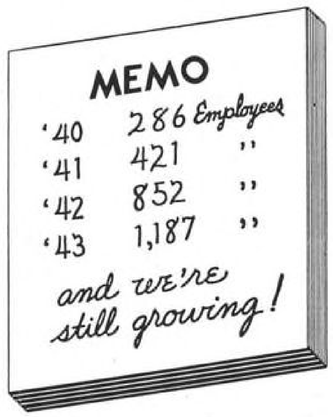

Rapidly enlarging **contracts** awarded Aircraft Mechanics, Inc. demanded expanded plant facilities, equipment, tooling—and employment!

—And regardless of this growth, which includes more than a 400% increase in personnel, we've consistently maintained **production** schedules.

- DESIGN
- ENGINEERING
- MANUFACTURE

of

DROP FORGINGS
for aircraft—

and

WELDED TUBULAR ASSEMBLIES
for aircraft—

AIRCRAFT MECHANICS · INC·

COLORADO SPRINGS COLORADO
Designers—Engineers—Manufacturers

time. To reach the loading ramp may require taxiing as much as a mile. More frequently than not, other airport traffic delays the ship still more before it is allowed to taxi in.

With passengers and freight loaded, the plane must once again taxi the long distance to the takeoff position and wait for clearance from the control tower. Once in the air it still may not be free from the restrictions of the average modern airport, for it often will be necessary to circle the airport once more in order to get headed out on the proper course. Fifteen minutes? It frequently is impossible to get away that quickly, unless traffic and wind conditions are ideal.

My purpose in recounting these well-known difficulties is not to indicate that the present method of operating from existing airports is wrong. We all know that it is necessary. But at the same time, it graphically illustrates the impossibility of trying to extend our present operating method to feeder airlines. It would be impossible to maintain scheduled speeds of more than 50 mph. if this lengthy landing procedure was required every 20 or 25 mi.

Since we obviously cannot reduce the time per landing to anything near 5 min. on these airports, it seems to us that we must think in terms of a new airport ideal for feeder airline operation.

We believe the logical answer is flight strips, laid out parallel to the course of the feeder route and long enough to permit the aircraft to land from either direction without the necessity of circling, except in the case of strong following winds.

If the feeder route should go through the town with a substantial change of direction, it would be desirable to have the landing strip laid out so that its length would be included in the angle made by the route. In other words, if the line enters the town from the north and departs to the east, the landing strip should be parallel with the north-south course or the east-west course, or laid out in any direction between north-south and east-west.

To operate from such a landing strip would require an aircraft that could be handled successfully in fairly strong cross-winds. We believe that such an aircraft can be built, and that it should have tricycle landing gear, good brakes, and good flight maneuverability.

Our studies of wind conditions in various parts of the country indicate that an aircraft of this type could be landed safely with as much as a 10 mph following wind, which would enable landings to be made "on course" at least 90 percent of the time. If the wind were stronger than 10 mph. making circling necessary to get into the strip, the delay on the schedule would be negligible, since there would be the

Absorbed **578%** *of its weight in oil!*



After 24 hours' immersion in S.A.E. 20 oil, wick specimens (each .25" diam. x 30" long) of six different types of Booth "prescription" felts were surface-drained and then weighed. Oil absorption as high as 578% of the original weight of specimen was recorded.

Various Booth felt tests, by independent laboratories, may give you new angles on felt. Ask for copies of the reports.

THE BOOTH FELT COMPANY
482 19th Street Brooklyn, N. Y.
745 Sherman Street Chicago, Ill.

APPLICATION CHART AND SAMPLE KIT . . . Contains swatches of S.A.E. felt types, with specification tables. Write for it. (No sales follow-up.)

2074

Booth
TRADE MARK

PRECISION CUT FELT PARTS

What's Behind All This?



OLOFSSON

Designers of Tools, Dies, Jigs and Fixtures
Designers and Builders of Special Machines

Behind this door is a veritable treasure chest. Not of gold or precious stones, but of something far more valuable. Within are to be found degrees of skill, ingenuity and craftsmanship rarely matched.

No new and untried group of craftsmen, this, but men honored by long, successful accomplishment.

This may be a Door of Opportunity for you, for the needs of war or the requirements of peace.

OLOFSSON TOOL AND DIE COMPANY
LANSING, MICHIGAN
Chicago Engineering Office, 600 South Michigan Avenue

ACTUS *in fast Company*



Grumman *"Hellcat"*. . *ACTUS EQUIPPED*

ACTUS SERVES
Every War Effort By

BEECH AIRCRAFT
BOEING
CANADIAN VICKERS
CHANCE-VOUGHT
CONSOLIDATED VULTEE
CURTISS-WRIGHT
DOUGLAS
FAIRCHILD
FORD
GRUMMAN
INTERSTATE AIRCRAFT
LOCKHEED-VEGA
McDONALD BROS. (Canada)
GLENN L. MARTIN
NORTH AMERICAN
NORTHROP
PAN AMERICAN
REPUBLIC
WRIGHT
PULLMAN
WESTERN ELECTRIC
GENERAL MOTORS
BRUNSWICK-BALKE-COLLENDER
ELCO NAVAL DIVISION
ANNAPOLIS YACHT
HARBOR BOAT
HIGGINS
PACKARD
MIAMI SHIPBUILDING
WHEELER SHIPYARDS
HUCKINS YACHT
MATTHEWS
and many others


ACTUS HOSE CLAMPS fight wherever the fighting is toughest. On all fronts—on the offensive everywhere—ACTUS Products expedite production and ease maintenance problems by reason of the *extra-efficiency designed into the Products of* ACTUS PRODUCTS COMPANY, Mount Vernon, New York.

ACTUS ALSO MAKES **WrapLock**
America's Most Efficient "Strip" Hose Clamp
and **WrapLock** Hose Clamps



ACTUS

THE CONTINUOUS STRIP HOSE CLAMP
ORIGIN AND DEVELOPMENT BY **ACTUS**



Here's real heat and corrosion resistance. Photo shows tubular parts of a heat treating furnace.

HEAT and CORROSION PROBLEMS SOLVED
With This Stainless Tubing

Along with positive resistance to continuous heat and corrosive elements—Carpenter Welded Stainless Tubing permits the use of *lighter gauges* without sacrifice of strength. And that means *less weight, more compact assemblies—and easier fabricating.*

Ever since the days when Welded Stainless Tubing was pioneered by Carpenter, we have been sharing our diversified experience with engineers and production men. For help with *your* particular heat or corrosion control problem—or for useful fabricating hints—get in touch with our Metallurgical Department.

YOU CAN USE THIS FOLDER

to help you take advantage of the properties provided by Carpenter Welded Stainless Tubing.



A note on your company letterhead will bring you this information on *physical properties, diameters and gauges, special shapes, specialty tubing,* etc. For your copy, drop us a line today.

THE CARPENTER STEEL COMPANY
Welded Alloy Tube Division, Kenilworth, N. J.

Carpenter
WELDED
STAINLESS TUBING

compensating increase in the aircraft's speed when it was flying toward or away from the strip with the same strong following wind.

A further speed-up in time per landing would be possible if the aircraft utilized high lift devices, thus had a low landing speed. This would permit having landing strips long enough to allow a landing and takeoff without any taxiing whatever—the passenger station being located halfway down the strip. Should traffic be unusually heavy, requiring a double landing strip for reasons of safety and convenience, the facilities still would require very much less space and very much less installation and maintenance cost than do present airports.

With this type of landing area for feeder airline use, and with the properly designed aircraft to fly from it, Southwest Airways is positive that the time lost per landing on the two feeder systems for which it already has made application to the Civil Aeronautics Board (11 routes in the three Pacific Coast states and 20 routes in the Texas area) could be cut down to an average of 5 min. To the best of our knowledge, that is the only way feeder airline schedules could be flown fast enough to render adequate service.

As a practical matter, no feeder airline will be able to require that communities along its routes put in landing strips immediately. It will have to take whatever facilities are available, using airports already established when landing for passengers.

But in a short period of time, it is probable that some of the towns will realize the advantage of separating their feeder airline traffic from that of the private owner and other local flying, due to the difficulties and hazards involved in trying to get scheduled flying through their limited airport facilities with a minimum loss of time. When this realization is reached, landing strips probably can be established.

In the case of those communities which now do not have airports but which desire passenger service on a feeder line system, it seems likely they will start out with a landing strip. Then, if there is sufficient need for more extensive facilities, an airport can be constructed.

However, dependence upon the communities themselves to take the initiative in establishing strips may well involve a considerable number of years, during which feeder airlines would not be able to perform their complete function of mail, express, and passenger service. Most small communities are hesitant to plan building air facilities, for they have seen too many of their neighboring cities burden themselves with heavy bond issues to finance the immense airports presently required.

Do You Want TURNBUCKLES?



• Increased facilities now available permit us to offer our technical service and manufacturing capacity to a growing number of manufacturers in the aircraft and allied fields. We are in a position to offer Turnbuckles to meet all requirements of accuracy—uniformity and strength. Also can furnish durable, accurate Terminals and can make attractive deliveries on both items.

Consult BUCKEYE on both your Turnbuckle and Terminal needs.

Quotations will be made promptly from your blueprints or specifications.

Write for further details.

Buckeye Tool & Supply Co.
2033 W. 55th St., CLEVELAND, OHIO

VICTORY...in the Making

Here, at Doolittle, we are coordinating every effort and skill to help provide the communications equipment so essential for Victory. This will mean better peace-time communications after our battles are won.

To Assure Victory Buy More U. S. War Bonds and Stamps

Doolittle RADIO, INC.

Builders of Precision Radio Communications Equipment

7421 S. Loomis Blvd., Chicago, U. S. A.

ARMY TWILL BY REEVES SANFORIZED* MIL-T-44 MADE TO GOVERNMENT SPECIFICATIONS

REEVES Glengarrie POPLIN

Demand these labels when buying uniforms

UNIFORMS OF REEVES ARMY TWILL CAN TAKE IT!

Pilots who fly in the service and ground men who service the flyers both demand uniforms that stand up under all conditions of work and weather. So insist these uniforms be made of *Reeves* famous fabrics.

Uniforms made of Reeves Army Twill meet exacting U. S. Government Tests for better wear, longer life, and color fastness. Its fabric vitality keeps it "in shape" under trying conditions.

GLENGARRIE POPLIN for matching shirts. A durable, stylish fabric that comes in a wide range of colors. Both fabrics are Sanforized against shrinking.

*Fabric shrinkage not more than 1%. (U. S. Government Test CCC-T-191-a)

See your nearest dealer for uniforms, sport and work clothes made from these famous fabrics, or write for colorful leaflet to:



OVER 6050 million yards of Reeves Army Twill sold to the U.S. Army

REEVES BROTHERS, INC.

54 WORTH STREET NEW YORK CITY

We think the most logical way to launch landing strips where they are needed by feeder lines would be to make them part of either a national or state highway program, or to establish a department of the Civil Aeronauties Authority which would provide them as aids to navigation. Undoubtedly some method of local participation in the program could be worked out if desired; perhaps a town wishing a strip could pay part of the construction cost and the governmental agency the balance.

There is no question of the success of strips. Those built for wartime military purposes have proved so successful that Fred E. Schnepfe, special engineering consultant to the administrator of the Federal Works Agency and director of the Public Roads Administration's flight strips division, recently said this of strips built under authorization in the Defense Highway Act of 1941:

"They have justified everything we expected them to do From operational and engineering standpoints they have proved entirely feasible and distinctly successful, particularly considering that these facilities are built at a cost so much less than an airport."

Schnepfe predicted that landing strips would have an important place in post-war civil aviation, stating that "for routes which are sure to come at the close of the war . . . bringing complete air service to as many as 5,000 communities, compared to the less than 500 cities receiving some kind of air service at the start of the war . . . the installation of flight strips will be the wisest course to pursue in providing landing facilities for these communities."*

There are approximately 8,000 cities and towns in the United States with a population of more than 1,000 people, a size of community which the All American operation has proved it is feasible to furnish with air transportation. Of course not all of these will be served by feeder routes, but we believe that within four or five years some 6,000 communities should have the benefits of direct air service.

Probably at least half of these would require no landing strip but would be served by mail and express pick-up alone. This would leave some 3,000 landing strips needed to expedite feeder airline schedules. The sooner this proposal can be incorporated in some national plan the better.

For here, again, construction of landing strips would provide a lot of jobs for our boys when they come marching home. It also would firmly assure the future permanence of widespread feeder airline operations, keeping our nation's air transportation system the most complete and progressive in the world.

* Readers are also referred to Flight Strip "Hows" and "Whys", p. 247, Jan. AVIATION.

Arresting a Disturber!

SPARK INTERFERENCE



Mounted on a Pratt & Whitney Twin Wasp Engine

REDUCING spark interference in warcraft engines to a low level and maintaining it there against the impact of modern conflict—this is the war job being done by Bolton Radio Shielded Ignition Assemblies. This requires not only correct electrical design, but also extreme durability throughout. Ability to meet such a condition has placed Bolton equipment in service by land, sea and air.

BOLTON SHIELDED IGNITION ASSEMBLIES

BOLTON MANUFACTURING CORPORATION

692 CAMPBELL AVENUE · WEST HAVEN · CONNECTICUT



Danly Die Sets are not products that get to the front. Their job is in a thousand factories in the presses that stamp out and form parts for all branches of the service.

They are products for a thousand end uses. They are aiding American Industry to produce ordnance and equipment enabling American Fighting Men to win the war.

If your production calls for die sets, call for Danly. Danly service to customers is still increasing despite the strain of war schedules.

DANLY MACHINE SPECIALTIES, INC.
2100 So. 52nd Avenue • Chicago 50, Cicero, Illinois

Call Danly:

CHICAGO .... *Lawndale 7440*
MILWAUKEE ..... *Broadway 1644*
DETROIT ..... *Cherry 6666*
CLEVELAND ..... *Express 0300*
DAYTON ..... *Fulton 6651*
ROCHESTER ..... *Main 2554*
PHILADELPHIA ..... *Radcliff 2323*
LONG ISLAND CITY..... *Ironsides 6-8080*
DUCOMMUN METALS & SUPPLY CO.
Los Angeles . . . *Kimball 0181*



DANLY DIE SETS

Welded Steel Fabrication

ANOTHER GILBARCO CONTRIBUTION

Built especially for aviation fueling service, the Gilbarco Filter-Funnel has been approved and used for ten years by the U. S. Navy, as well as by commercial air lines, private fliers, and the air forces of our Allies.



The Gilbarco Filter-Funnel is designed to promote added safety in flight by eliminating such causes of motor failure as sand, lint and water in gasoline. It represents one more Gilbarco contribution to the technique of fueling and servicing modern aircraft.

Gilbarco

GILBERT & BARKER MFG. CO.
WEST SPRINGFIELD, MASS.

America at War

(*Continued from page* 113)

Results already produced by the Nazis in their war of defense are improved fighter performance, heavy new armor in exactly the right places to protect their pilots while they are making passes at our bombers, and more 20 mm. guns. Their airborne bomb catapult is an effective weapon. It throws a powder charge bomb with compressed air.

There is some trustworthy opinion that German pilots' morale is cracking as they see more and more Allied bombers coming despite their struggles. But other opinion, just as trustworthy, says we cannot be too sure of that.


As time goes on the Germans put more and more of their industry under ground or hide it with increasingly effective camouflage. Allied crews have tried to skip bombs into subterranean works, but obviously this is a difficult thing to do. At the same time, Allied forces advancing north in Italy hasten the day when all Germany and all her captives will be in range of attacking aircraft. We have already reached Poland and Prussia in the far northeast, although not with maximum bomb loads. Full-load bombing is still limited to 500 or 600 mi.; beyond that too much of the load is fuel.

The Army is shifting emphasis to long-range fighters. This means, for the present, important changes in some planes and discontinuance of others. The P-38, which has the longest reach of any U.S. fighter, probably can be made to range farther. P-47's appear to be in the same league, escorting the heavy bombers on constantly longer raids. You can guess for yourself that the much-praised P-51 will have its range stretched.

In addition to long-range fighters, the Army wants heavier production of the B-24 *Liberator* and of the B-17 *Flying Fortress*. These planes can hit all parts of Hitler's shaky empire from bases soon to be available. But the new B-29 super-bomber is being rushed to maximum production to do a still heavier job; its range will be nearly double that of its predecessor.

It is hard to be certain of anything on the Russian air front. Beyond doubt the Allied attack in Italy and across the Channel has pulled a load of German fighters off the Muskovites' backs. Soviet airplane production is going up, with some estimators (who know very little about it) putting the figure at 1,900 per mo. That alone would be enough to tie up all the air power the Germans have to spare for their eastern front if, as is reported, the Russian quality is good.

One hesitates to call anyone an au-

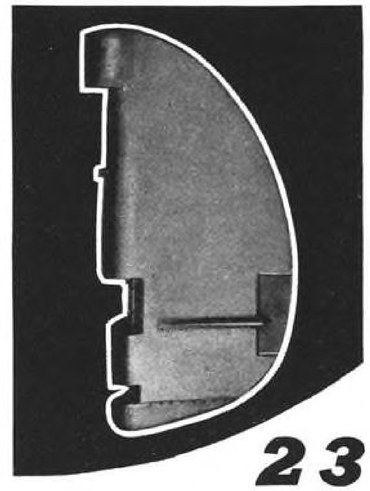

23 years

OF EXPERIENCE in fabricating aircraft . . . personnel skilled in working with aluminum, aircraft steels and fabric . . . specialized equipment for forming, assembling, treating and finishing the job completely . . . the capacity to make deliveries on schedule . . . these advantages make Mercury a logical source for aircraft surfaces.

accessories, too

Oil Separators for deicing equipment, Flier's Relief Tubes and Fittings and Communication Sets for training planes are typical of the many aircraft accessories produced by Mercury in quantities which assure rush shipments.

NAF-47089

We are able to make especially quick delivery on this widely used Navy Oil Separator.

AT *The Cradle of Aviation*

MERCURY AIRCRAFT INC.
HAMMONDSPORT NEW YORK



Weldwood Glue is stronger than the wood it fastens

When flak concussions or air pockets toss your planes around, there's one thing you can be sure of—the parts you bonded with Weldwood Glue will hold at the glue line.

The amazing strength of this plastic resin adhesive has been demonstrated by long use and proved by scientific shear tests.

Water- and moisture-proof, Weldwood Glue is impervious to bacteria and rot.

Applied cold, it's quick-setting. Mixed just by adding tap water to the powder.

Seems worth looking into, doesn't it? Packed in 100 lb. and 300 lb. drums from your Mill Supply Dealer or Industrial Distributor or use the coupon below for quick action.

Approved by U.S. Army, Navy, Civil Aeronautics Authority and Maritime Commission.

WELDWOOD PLASTIC RESIN WATERPROOF GLUE



UNITED STATES PLYWOOD CORPORATION
Weldwood Glue Dept. 15, 103 Park Avenue, New York 17, N.Y.
Please send literature, sample and prices of Weldwood Glue.

Name _____

Company _____

Address _____

thority on Russian arms. We remember too well some of the "authoritative" miscalculation that the Reds would last three weeks against the Germans. But our authorities, such as they are, think the Russian winter campaign will put Hitler approximately back on the very line from which he started the invasion—the boundary of Germany. And most people think the Russians won't stop there. On the other hand, some people do express apprehension that the firing might cease, releasing German fighters for action on the Western front.

On the other side of Russia, the Allies want bases from which to bomb Japan—the subject comes up more and more frequently. Sen. "Happy" Chandler, who recently returned from the Pacific theater with four other Senators who were on an inspection trip, says that the use of such bases would save one million lives on our side. We suppose we might expect the Russian argument that a full-blown second front in Western Europe would save millions of Russian lives. Then again, a tremendous amount of set-up and supply necessarily would have to precede use of such Pacific air bases. Moreover, the consequent business of Russia going to war with Japan must be considered—in short, a weakening of the Russian effort against Germany at a time not suited to the "beat the Nazis first" program.

Incidentally, if you wonder why the Reds don't talk, here is perhaps the best explanation you will find. They are ruled by a dictator, and what he says goes. But our government is different. No man here can say "what goes," not even President Roosevelt, though his war powers seem great to us. The Russians remember that President Wilson sold the world a league of nations, but he didn't sell it to our Senate. They know that Mr. Roosevelt does not have final authority, that he cannot make a deal for us and guarantee it.

About the bombing of Japan—trouble there, too. First, look back a year or two. The aviation "experts" and the fans over-extended themselves on the possibilities of air power. They figured right on the damage aviation can do to an enemy, but they far underestimated the things that have to be done before aviation can take off. They didn't dream of the amounts of supplies, ships, docks, roads, airports, warehouses, housing, hospitals, foods, medicines, and men it would take to back up a strong air task force. Most of them admit it now. That is why it is so much harder than we thought to make mince meat out of Germany.

How much harder, then, will it be to crunch Japan, which is so much far-



"THEY TAKE YOU OUT—AND BRING YOU BACK"


So writes an American pilot from the Southwest Pacific. This statement aptly expresses the finest tribute that can be paid the American combat planes. It is a reflection of the determined and continuous efforts of plane and accessory manufacturers alike to provide ever better performance, greater safety and more dependability. Reports of aerial combat in the various theatres of war show the definite superiority of American planes.

VICKERS HYDRAULIC EQUIPMENT

Vickers Hydraulic Equipment is used on the great majority of our country's combat planes because it helps them "take you out—and bring you back."

VICKERS Incorporated
1462 OAKMAN BLVD. • DETROIT 32, MICHIGAN

Engineers and Builders of Oil Hydraulic Equipment Since 1921

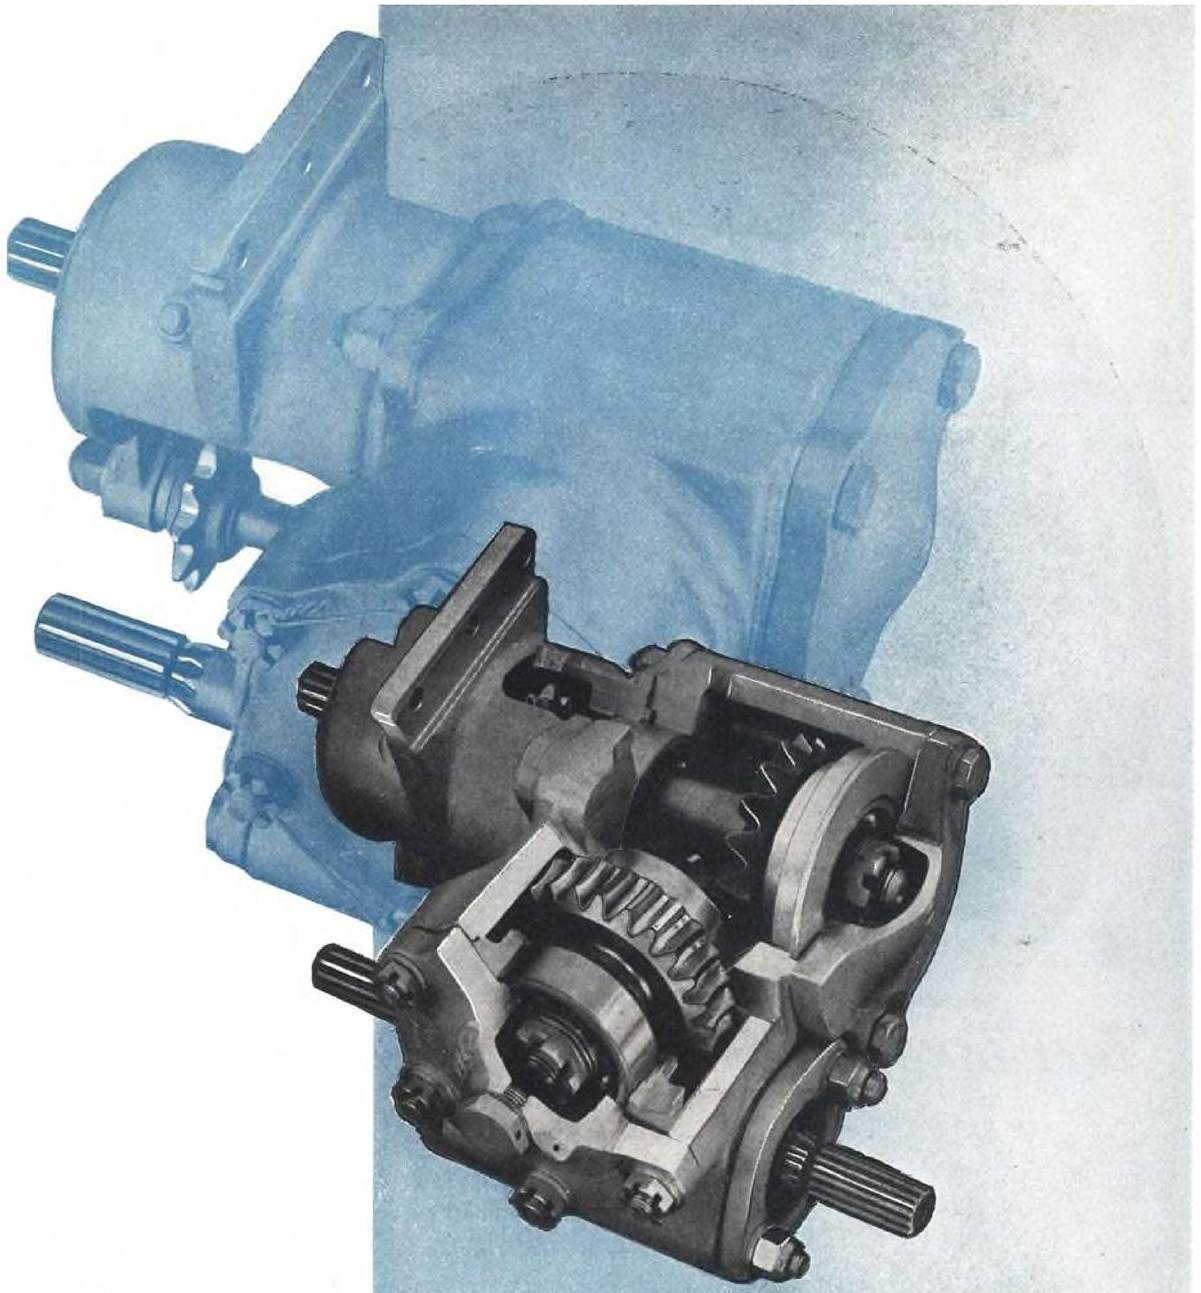

Flap Transmission for an Aerial Freighter

Due to our wide experience in the field of aircraft hydraulic actuators, one of the nation's leading aircraft builders called on us to design and build a mechanism to operate the wing flaps on one of their large cargo planes. These flaps are used for maneuvering and braking the plane during a landing and the control is extremely sensitive. A very special mechanism was needed, light, as there are fourteen of them in the wing, and strong enough to withstand unusually high torques.

VARD engineers developed this wing flap transmission. A row of these small gear boxes is linked together by splined shafts, running out of a central transmission in the fuselage. Flaps are extended or retracted by chain drives from the individual transmissions in line.

For years, VARD has built precision aircraft parts and gages, but few pieces of aircraft equipment which we have built top this small transmission for critical accuracy. Despite its small size, it handles an unusually high load through a forty-five to one gear reduction. The unit contains chain sprockets, a worm and a worm gear and zerol bevel gears, all carried on ball bearings. Tolerances are at a very minimum, as there can be no slack in the whole transmission system.

We designed and are building this transmission complete, making every part except nuts, bolts and ball bearings. It has been fully tested by the plane manufacturers and declared a good job.

VARD INC. PASADENA, CALIFORNIA

ARMY E NAVY

We'll make it for you!

—or help you make it

Plant facilities and trained technicians of RADIO WIRE TELEVISION INC. now available for manufacturing Electronic and associated products.

We have been making:

Pre-amplifiers • Power supplies
Rectifier Units • Cord Sets
We have done much work involving Chassis Wiring • Assembling Soldering etc.
We can handle all kinds of Sub-Assembly Work.

Among our Customers:

U. S. Army Signal Corps
Large Industrial Concerns

Examine our Credentials:

ONE OF THE OLDEST and largest radio supply houses in the world. 22 years experience in this field.

WE HAVE MADE Public Address and Sound Equipment for the past ten years.

WE HAVE PIONEERED several new audio developments.

COMPETENT ENGINEERING STAFF, expert purchasing and expediting departments.

KNOWN TO ALL MANUFACTURERS in the field—to many as far back as 1921—and therefore in position to demand and get preferential treatment.

NO LABOR SHORTAGE. Plant facilities in New York area.

3 PRIVATE TELEPHONE LINES reserved exclusively for personal and efficient service to industrial customers.

INQUIRIES INVITED
CONSULT US WITHOUT OBLIGATION

Radio Wire Television Inc.
100 SIXTH AVENUE, NEW YORK
BOSTON, MASS. • NEWARK, N. J.

NEED RADIO PARTS?

We carry large stocks of radio and electronic parts at all times. We distribute the products of all nationally-known manufacturers of radio and electronic equipment. Immediate shipment on anything in stock—no need to split orders. Naturally, items restricted by WPB are held for government sale only. FREE: catalogs, supplements and bargain flyers which we publish from time to time will be mailed to you without charge, on request.

ther away. On the favorable side of that picture, as these writers have said before, is the enormous amount of airplanes and all it takes to back them up, including veteran crews, which will be released when the Nazis fold. But it will be a long hard job to get set for the punch. Any layman with a map can see that there are about four ways to do it, and he can see that they are all difficult. Furthermore, the Japs, being resourceful in war, will give us a run for our money. Already they have thought of moving their vital industries into Manchukuo, the size of the United States east of the Mississippi.

Allied invasion of Italy, the capture of Foggia and Naples, and the drive on Rome all made a pretty picture. The informed military men knew that the Germans had orders to retreat after their initial failure at Palermo. Best thing about it was the magnificent air support of our ground forces. Gen. Arnold said we couldn't have taken the beachhead without it. People who saw it, said Allied air support cut a swath like a scythe. First the Germans and now the Allies prove that ground forces with air superiority overhead cannot be licked. That's why the Army demands more and still more from the aircraft industry; and the demands are for it all this winter.

In the Pacific, the capture of Lae, powerful Jap base, and the taking of Finschafen were both serious blows to the Japanese. They see plainly now that the Allies mean business and can give them a workout whenever they want it. So they, too, are on the defensive. And they are shifting their aircraft production to fighters, just as are the Germans. They know they cannot take any more territory.

But, as President Roosevelt says, they are holding an empire that reaches from Paramushiro down to China, the East Indies, Malaya and Burma. He says we shall have to hit them hard in many places.

Our aviation industry here in this country is on a production plateau, around 7,600 per month. Manpower shortage and design changes, the two main bottlenecks, are an old story by now. Worst part of it is that all the apparently possible answers have been thought of, and nobody knows which one, or which combination, will do the trick. There is no more new manpower to be had, and it looks as if workers will have to be shifted from other war and civilian production to airplanes.

At last some official words have been said on the postwar international airline policy of the United States. The words came from no less than President Roosevelt himself, who says he is in favor of private ownership and operation—in favor of freedom of the air to


IT'S WIRY JOE FOR AVIATION WIRE and CABLE

There was a time that Wiry Joe was merely the largest independent manufacturer of replacement wiring for the automotive industry.

Now, Wiry Joe is also known as an important source of supply for every type of electrical wire and cable for aircraft. The complete line includes starter cable, high-tension cable, primary cable, both original and replacement. Wiry Joe also makes power and welding cable.

And just as Wiry Joe automotive cable won a name for quality, so, too, has Wiry Joe aviation cable. Every item in the line is built to meet rigid Army and Navy specifications, and is produced under the Dostam method of manufacture for uniformity, dependability, high efficiency and long life.

Inquiries regarding wire and cable for any type of service will be answered promptly.

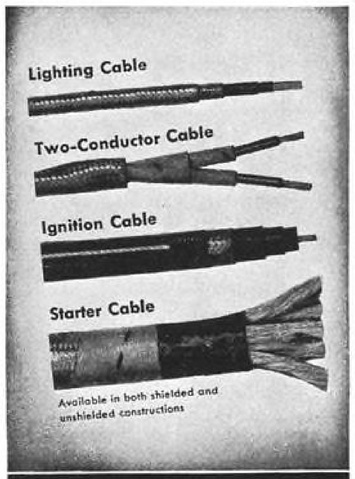

Wiry Joe
AVIATION CABLE
manufactured by
THE CRESCENT COMPANY
Pawtucket, Rhode Island

To Design the Airplane of Tomorrow

You need to know the background information in

AIRPLANE STRUCTURES



by Alfred S. Niles and Joseph S. Newell

Here are two volumes, now in the third edition, that present the information needed for the *present-day* production of airplanes and gliders—a complete analysis of welded-tube structures, wooden beams and members, and all-metal or stressed-skin structures.

Volume I gives a well-balanced discussion of the fundamentals of aircraft structures from the viewpoint of the designer: the aerodynamic questions which affect structural design—beam analysis methods, torsion, the analysis of statically determinate plane and space trusses, structural failures—a good foundation of theory with which to help you solve variations in practice.

Volume II covers advanced problems on metal and plywood construction: the analysis of beams having incomplete tension field webs; a previously unpublished, more convenient method for computing the "shear flow" in multi-celled wing shells is included; an application of the calculus of variations to the torsion-bending stability problem in open-section columns. You will also find allowable stress data and information on the newer materials such as magnesium alloy, plastics, plastic-bonded plywood and glass.

Volume I 455 pages 279 illustrations $4.50
Volume II 439 pages 148 illustrations $4.50

·····ON APPROVAL COUPON·····

JOHN WILEY & SONS, Inc.
440 Fourth Avenue, New York 16, N. Y.

Please send me a copy of Niles and Newell's AIRPLANE STRUCTURES, Vol I ☐—$4.50, Vol. II ☐—$4.50, ($9.00 for the two volumes) on ten days' approval. At the end of that time, if I decide to keep the book(s), I will remit the indicated price plus postage; otherwise I will return the book(s) postpaid.

Name .....

Address .....

City and State .....

Employed by .....

A-11-43

the extent that the lines of one country could pass over another by permission. He is probably in agreement with the interdepartmental committee on air policy. And the group of 16 airlines which recently declared for free competition over the seas was pleased with what he said. Of course, agreements still have to be reached with England and other countries, and probably the Senate will want to pass upon them.

The Civil Aeronautics Board has opened hearings to obtain information on which to base future award of so-called "feeder" airlines which, it is expected, will network the country. The evidence indicates a huge volume of business awaits those carriers which can cut costs and beat the trains and autos on short runs. Specially designed airplanes may give the needed economy, but nobody knows what to do about cutting the time from the passenger's door to the place where the plane takes off.

Plant Power—Minus the Bottlenecks

(*Continued from page* 159)

breaker, and a varying number of load breakers in each switchboard. By means of the station tie and by-pass breakers, any plant substation can be (1) operated as an individual load center, (2) connected to one or two other substations, or (3) cut out entirely.

Just as a complete plant substation can be transferred to either of the master substation buses, so can the loading of power transformers in each substation be obtained by relying on the interconnections of the secondary power buses through the station tie breakers at the substation, or by closing or opening sectionalizing points in the low voltage bus duct runs between heavily and lightly loaded adjacent substations.


That a high degree of flexibility exists in the power distribution system is proved by the fact that all unforeseen rearrangements of machines in production lines and shifts of load concentrations have been accomplished with no major changes in the original installation. As an example of the flexibility of these interconnections to take care of future expansions, eleven new substations have been added to the original ten either by connecting them to existing feeders or to new feeders, all without loss of production anywhere in the entire plant.

The low voltage lighting switchboards are also of the metal enclosed type using manually operated draw-out air circuit breakers for station tie and load circuits and draw-out type network protectors for the secondaries of the lighting trans-

Gothard

SERIES 800 PILOT LIGHT





Features . . .

- **Removable Snap-socket**
- **Rigid Non-short Terminals**

Gothard Series 800 Pilot Lights are particularly adapted to aircraft, radio, switchboards and a wide range of electrical and electronic devices. Socket and new style rigid terminals that cannot work loose or twist are integral parts of the spring member, which locks firmly into Jewel housing. Socket is easily removed with spring member for replacement of lamp bulb. Bulb may also be inserted from front of panel by removing slip-ring mounted Jewel. Range of Jewel colors—plain or faceted—miniature or candelabria screw sockets, or miniature bayonet sockets.

Gothard

• Ask for Gothard Pilot Light Assemblies Catalog for complete information.

MANUFACTURING COMPANY
1325 North Ninth Street, Springfield, Illinois

If your problem is SEALING...



...Sealing IN Gasoline, Oil or Hydraulic Fluid—
Sealing OUT Dirt, Moisture or Air—
Sealing AGAINST Vibration or Shock...

Whatever your sealing problem, Rodic Rubber engineers can help you.

We supply freeze resisting compounds which our customers report flexible at —100° F., heat and oil resisting compounds with excellent qualities after long exposures to temperatures of 300 to 350° F.

These especially developed rubber and synthetic compounds are also fabricated into hose for lubricants, hydraulic oils and aromatic fuels. They are bonded to metal or processed into other forms of mechanical rubber goods for planes, tanks and guns.


Our chemists have had wide experience in compounding rubber, synthetic rubber and plastics to specific requirements. Our engineers can help you in the design and production of parts from these materials.

Every facility of Rodic Rubber is at the command of the aircraft industry. We urge you to put our experience to work for you immediately. Write, wire or phone us today!

For *Sealing Unlimited* GET IN TOUCH with


RODIC RUBBER CORPORATION GARWOOD, N. J.

ESTABLISHED 1925 . . . 18 YEARS OF EXPERIENCE IN THE CHEMISTRY AND TECHNOLOGY OF RUBBER

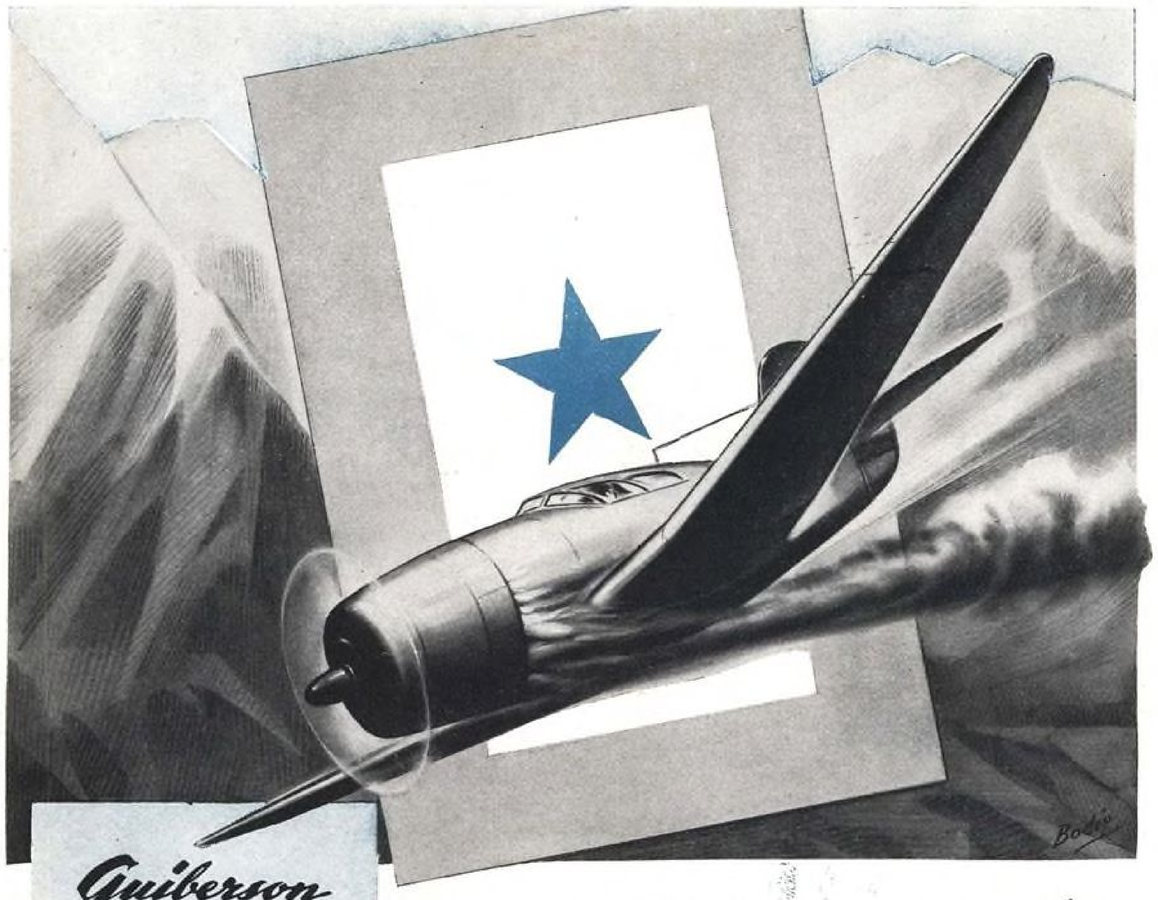

Guiberson

PRECISION BUILT AIRCRAFT PRODUCTS

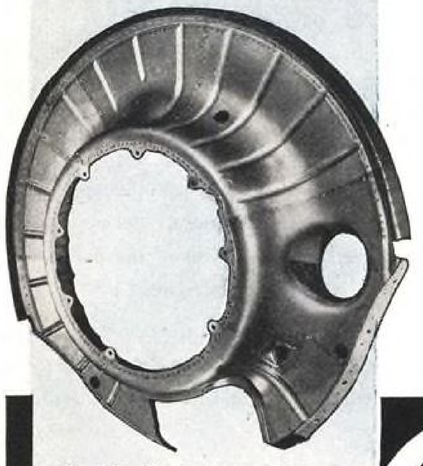

Fire-walls, flap track supports, seats, motor mounts, sumps, cowling, manifolds, scoops, heating systems, tanks, collector rings and a multitude of sheet metal and drop hammer parts of all kinds backed by 22 years of experience in precision manufacture.

ANOTHER STAR *that* WILL NOT TURN TO GOLD!

A tracer bullet, a broken gas line and searing flame leaps back toward the cockpit. But there it stops . . . held at bay and confined by the fire-wall while precious minutes are won. Minutes that often mean a safe landing and another pilot saved . . . minutes that mean another star in the window of an American home that will not turn to gold. The saving of a single American pilot far more than justifies the extra care and precision that goes into the building of every Guiberson fire-wall and every other Guiberson built aircraft part.

SAFE THAN SORRY GUIBERSON BETTER BE

ESTABLISHED 1919

AMERICA'S ONLY RADIAL AIR-COOLED DIESEL ENGINE BUILT BY GUIBERSON

Guiberson U.S.A.

THE GUIBERSON CORPORATION
GUIBERSON DIESEL ENGINE COMPANY
DALLAS, TEXAS

formers. Each switchboard has two network protectors and two station tie breakers. There is variance only in the number of load breakers.

Since lighting is considered a service of prime importance, lighting transformers have their secondaries extensively interconnected. A plant network for lighting is considered the best so far available, since such a load is stable and fixed and this system offers the highest degree of reliability and the best voltage regulation.

The lighting network system used in this plant was designed to supply service to the lighting bus at each plant substation and not to protect service to outgoing feeders. For this reason the plant substations are normally operated as individual lighting buses; that is, the station tie breakers are normally open. By closing the tie breakers it is possible to connect two or more lighting buses together to supply a substation in trouble or to form a complete loop if desired.

For example, in one large building there are six plant substations each with its own lighting bus These may be operated as separate buses, all six connected in a complete loop, or with any two or more buses tied together. Thus each large building may have its individual network loop for lighting.

Since lighting buses can be connected in a loop, network protectors are installed on the incoming circuit from the secondaries of the lighting transformers. This differs from the power system, because it is not planned to connect the substation power buses as a loop system.

Lighting transformers are customarily loaded close to their full capacity. A 500 kva. 3-phase transformer is found to be the preferred rating, for a load of this size can be safely carried by the other transformers in an emergency.

Fluorescent lighting was used because a maximum area could thus be served with a given size transformer due to the low wattage per square foot required for this type of lighting.

Once the area that could be served by a 500 kva. lighting transformer was determined, it was a question of adjusting the power load in the same area so it could be accommodated by moderate size transformers. In this case, 750 kva. power transformers were found to be the most economical when the investment for low voltage switchgear and interconnections was balanced against the number of plant substations required.

This standardization of sizes and voltages of power and lighting transformers permits the ready replacement of a faulty transformer. The 3-phase transformers give the same reliability as banks of single-phase transformers because of the extensive interconnections of the secondary mains. The 3-phase

Irvington Steel & Iron

TAILOR-MADE WELDMENTS FOR INDUSTRIAL USES



Airplane wheel dolly with adjustable floor and self-locking automatic brace arms.

• We are engineers, fabricators and erectors of structural steel and miscellaneous iron work.


Our specialty: Unusual special-purpose jobs for heavy industry. We serve some of the nation's leaders in aircraft production, mining, petroleum, rubber, copper and brass, chemical, radio, shipping, and many other fields.

MODERN FACILITIES, QUALIFIED WELDERS

We build to your specifications or our engineers will submit designs for your approval. Write for New Catalog and details.

IRVINGTON STEEL & IRON WORKS
FOUNDED 1909
Lyons Avenue at Lehigh Valley R. R.
IRVINGTON 11, NEW JERSEY

IMPOSSIBLE?

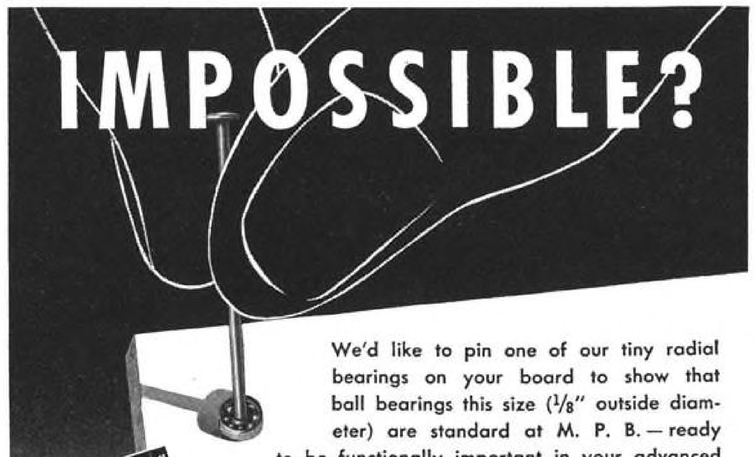

We'd like to pin one of our tiny radial bearings on your board to show that ball bearings this size (1/8" outside diameter) are standard at M. P. B. — ready to be functionally important in your advanced designs.

In our Bulletin 43-A-11 you will find a complete series of both radial and pivot bearings — actual sizes, detailed specifications, typical applications, users . . . Your copy of this convenient and useful catalog is ready — write or wire for it today.

ENLARGED 3 DIAMETERS
ACTUAL SIZE
MINIATURE *Precision* BEARINGS
KEENE, NEW HAMPSHIRE, U·S·A·



WELDON *Aircraft* FLUID METERING PUMPS

ANTI-ICING PROTECTION
for Propellers, Carburetors, Windshields and other Vital Parts

●

DUAL OUTLET
UNIFORM DELIVERY
at UNEQUAL PRESSURES

● A quarter century of experience in the manufacture of high quality precision cutting tools eminently qualifies WELDON to produce this Aircraft Fluid Metering Pump which has won complete acceptance because of its unfailing performance under the most exacting operating conditions. Rigid tests through extremes of altitude and temperature have demonstrated its dependability.

For Engineering Data Sheets Write:

THE WELDON TOOL CO. *Cleveland 4, Ohio*

PUMP DIVISION 2046 EAST 71st STREET CLEVELAND, OHIO

PIPE AND TUBE
BENDING TO
YOUR SPECIFICATIONS



Speed up your production by sending your bending to **SWAN!**

Here at SWAN we are specialists in the precision bending, coiling, expanding, flattening, brazing and welding of pipes and tubes of all types of metals. We are equipped to handle your bending and fabricating job, whether it is machine or hand bending turned out on a large scale production basis, or on a small scale for experimental work of a confidential nature.

Take advantage of our free advisory engineering service. We'll be glad to help you with your problems involving bending and fabricating, and designing, assembling and testing, too. Write today in connection with any problem we can help you solve.

SWAN ENGINEERING COMPANY, INC.
744 Frelinghuysen Avenue Newark 5, N. J.

units also consume less in floor space.

It will be noted that high voltage metal clad vertical lift switchgear and low voltage distribution switchboards with draw-out air circuit breakers are used throughout the plant. By the use of spare breakers, a breaker which has failed or requires maintenance can be removed completely from the switchgear and taken to a location where easier access to all parts of the unit can be had.

The features of this distribution system were worked out through cooperative efforts of Wright Aeronautical Corp., Albert Kahn, Inc., and Westinghouse engineers.

Cancellation Demands Action—And Quick

(*Continued from page* 119)

set up a full time organization made up of accounting, plant engineering, storekeeping, manufacturing, and legal personnel to handle all aspects of the contract termination. The Ordnance Department did likewise. But five months later the settlement was still pending, and discussions of profit or loss still had to be only in "general terms."


Yet another case is Hazeltine Electronics Corp., which received an abrupt cancellation order in June, 1942, only about two months after receiving its letter of intent on a contract. Payment had not been received 14 mo. later although there had been "reams of letters, telephone calls, and telegrams." On one occasion during negotiations the company received word from one of the many men who had handled its claim that his department was interested in getting production and not in settling claims.

A New York State manufacturer of boring mills produced two units on a contract and then, more than six months ago, had the contract cancelled. It will be several more months before full payment is made on the deal.

The list of such cases could be greatly expanded.

WPB has been engaged for more than a year in drafting a uniform cancellation clause to be incorporated in all fixed-price supply contracts. This worthy project has, however, had only lukewarm support from other government departments and agencies. The latest proposed draft was submitted to industry for suggestions, and if finally adopted it will be incorporated by reference in fixed-price contracts. The WPB also expects to draft uniform regulations for cost-plus-fixed-fee and emergency plant facilities contracts.

Meanwhile, however, the WPB plan has run into difficulties. The general accounting office, it seems, was by-passed in the WPB efforts to speed up termina-

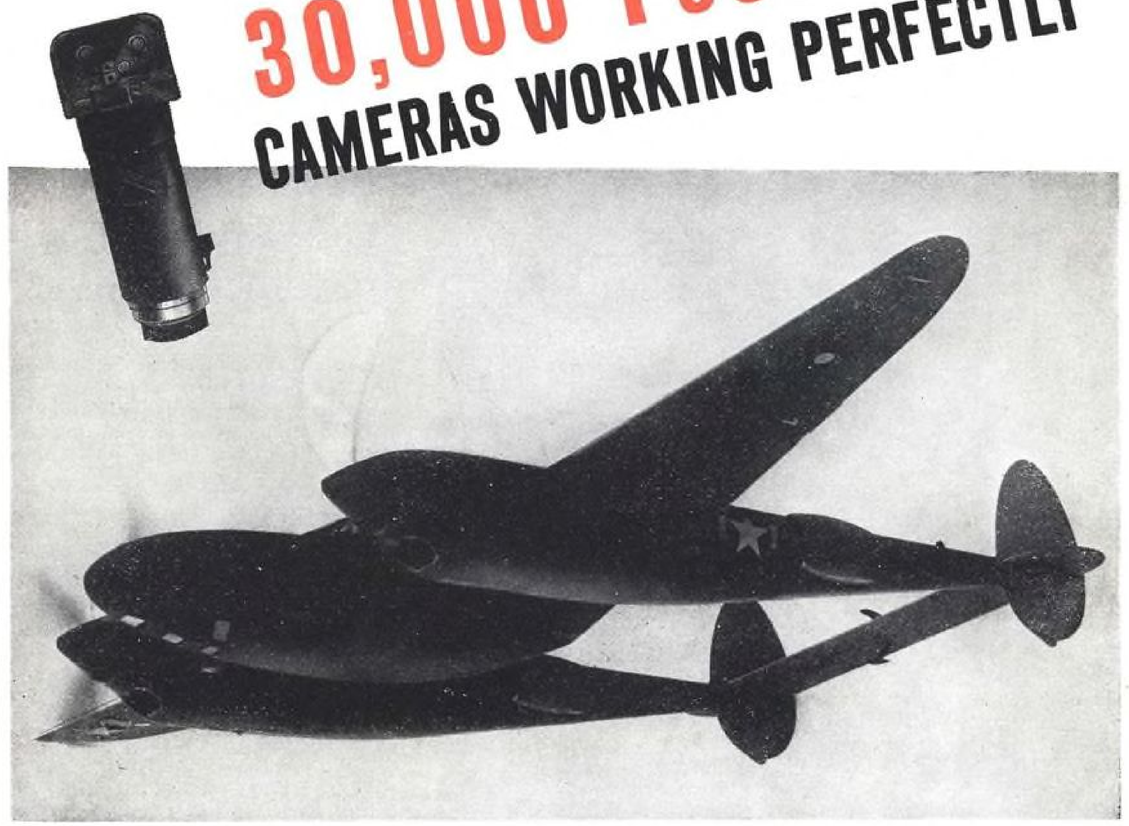

30,000 Feet
CAMERAS WORKING PERFECTLY

FLIGHT records show that planes flying at 30,000 ft. and above experience temperatures as low as —100°F. In this extreme cold, cameras and control mechanisms may *freeze up, fail to function.*

To correct this high-altitude flying hazard, we offer *Texaco* **LOW-TEMP** *Grease.*

Texaco **LOW-TEMP** *Grease,* the result of a 2 years' research, has had an enthusiastic reception because it assures effective lubrication throughout a temperature range from 100°F. below to 175° above zero.

A Texaco Aviation Engineer is at your service in helping to solve low temperature problems. Address —

The Texas Company, *Aviation Division,* 135 East 42nd Street, New York 17, N. Y.

THEY PREFER TEXACO

★ More stationary Diesel horsepower in the U. S. is lubricated with Texaco than with any other brand.

★ More Diesel horsepower on streamlined trains in the U. S. is lubricated with Texaco than with all other brands combined.

★ More locomotives and railroad cars in the U. S. are lubricated with Texaco than with any other brand.

★ More revenue airline miles in the U. S. are flown with Texaco than with any other brand.

★ More buses, more bus lines and more bus-miles are lubricated with Texaco than with any other brand.

TEXACO

TEXACO LOW-TEMP GREASE

TUNE IN THE TEXACO STAR THEATRE EVERY SUNDAY NIGHT — CBS ★ HELP WIN THE WAR BY RETURNING EMPTY DRUMS PROMPTLY



SPARTAN FLIGHT TRAINING

Can Qualify You for Essential War-Time Position and a Fine Peace-Time Future!

There's a vital need for pilots on the home front and on the war front . . . and the Spartan School of Flight is ready to train you for essential war-time flying that can lead to a fascinating lifetime career.

America needs pilots to fly the nation's airlines . . . pilots to deliver planes to battle fronts . . . pilots to teach "fledglings" . . . pilots to fly for Victory. These and many other highly paid positions are begging for trained men. Join the many young Americans who are training at SPARTAN to fill them. Here you may choose from all types of flying career courses, including: (1) Commercial and Airline Pilot courses (2) Instrument Rating course; (3) Flight Instructor course; (4) Refresher Flying courses.

For many years SPARTAN School has had the approval of the Civil Aeronautics Administration as a Primary and Advanced Flying and Ground School. This Certificate of Competency testifies to the qualifications of the instructors, air-worthiness of equipment and instructor-student ratio.

SPARTAN Offers You All These Advantages—A fleet of 18 modern training planes —skilled instructors—a location in the heart of the nation's finest flying country —seven flight fields—light, airy classrooms —29 modern buildings located on 50 acres —fully equipped shops and laboratories.

Get SPARTAN'S superior stepped-up specialized training for the aviation career of your choice. Next semesters start Jan. 3rd and March 27th.

SPARTAN SCHOOL OF AERONAUTICS DIVISION OF SPARTAN AIRCRAFT COMPANY
and COLLEGE OF AERONAUTICAL ENGINEERING DIVISION OF SPARTAN SCHOOL OF AERONAUTICS

SPARTAN SCHOOL OF AERONAUTICS—Capt. Maxwell W. Balfour, Director
Address Dept. A113, Tulsa, Oklahoma

Send me your new Catalog, describing in detail the SPARTAN courses I have checked, also stating tuition and living expenses.

Name ..... Age .....
Address .....
City ..... State .....
Previous Education .....

CHECK COURSES YOU PREFER

- ☐ Aeronautical Engineering
- ☐ Airline Maintenance Engineering
- ☐ Commercial Pilot
- ☐ Commercial Flight Instructor
- ☐ Airline Service Mechanic (A&E)
- ☐ Instrument Technician
- ☐ Airline Pilot
- ☐ Aircraft or Engine Mechanic
- ☐ Radio Communications
- ☐ Private Pilot
- ☐ Weather Forecasting
- ☐ Women's Instrument Technician

tion. Comptroller General Lindsay C. Warren therefore has entered the lists by asking Congress to enact legislation making the GAO, over which he presides, the final arbiter of all claims arising out of cancelled contracts.

Thus the Washington inter-agency battle for power now extends even to termination. And what's more, Congress very likely will back up Warren, since he is solely responsible to that august body. Warren would have the GAO review all claims and "certify for payment such balances as it may determine to be due." Such audits would take time, and it may well be that time will be more precious than money immediately after the war.

It is not the writer's intention to infer that the WPB proposal eliminates the need for legislation. Quite the contrary. In the first place the legality of this proposed formula which allows cost-plus-a-percentage-of-cost has been questioned in legal quarters. The First War Powers Act of 1942, it is pointed out, carries a restriction that "nothing herein shall be construed to authorize the use of the cost-plus-a-percentage-of-cost system of contracting."

The WPB plan also does not jibe with damage rules laid down by the federal courts. Further, it provides for appeals boards whose personnel might be chosen entirely from government departments and thus make their impartiality open to question. The same War Powers Act provides that contracts can be amended to include provision for negotiated settlements in terminations where such action is taken "to facilitate the prosecution of the war." However, the legal point has been raised whether or not this provision could be applied to contract termination after the cessation of hostilities.

Congress should recognize, then, that the First War Powers Act, rushed through just after Pearl Harbor, was only temporary legislation and that new laws are needed to make settlements that are binding and final.

The highest court has ruled that a company's expenses incurred in an effort to keep solvent or to regain its peacetime markets after cancellation cannot be recovered from the government. Here, it would seem, is another matter for Congress to look into.

The chief of one of the departmental price adjustment boards recently was asked what would happen to inventories when the war was over and contracts were cancelled. That, he replied frankly, was a big problem that hadn't yet been solved. Yet it is one of the most vital considerations of all.

Today, the government owns over one-half of the aircraft industry's inventories, and a large proportion of the remainder has been purchased with government funds in the form of con-



WANTED

HYDRAULICS ENGINEER

Large aircraft accessory manufacturer in Los Angeles area has responsible permanent position available as assistant to the Chief Engineer. Position requires the ability to assist in administration of the department. Hydraulic engineering background is essential, preferably in aircraft. Please address your inquiry, enclosing recent photo, to us as agents for the manufacturer. The Shaw Co., 816 W. 5th St., Los Angeles 13, Calif.

GATE GUARDS ARE HUMAN

DOUBLE THEIR EFFICIENCY WITH PEREY TURNSTILES



Gate Guards are subject to fatigue, uneven efficiency and sometimes negligence—they're only human. But—when reinforced with Perey Automatic Turnstile Systems their efficiency is doubled. They can devote full attention to inspection—at entrance against saboteurs—at exit to prevent the unauthorized removal from the plant of expensive, and sometimes irreplaceable tools, precision instruments and records.

CONTROLLED SPEED permits the easy flow of employees through the turnstiles as fast as they can walk—or stops instantly on emergency. The guard's authority is backed up by this subtle combination of psychological and physical influences compelling better behavior.


PEREY SYSTEMS ARE STANDARD EQUIPMENT IN

Aircraft Plants
Navy Yards
Shipyards
Arsenals & War Plants



War Plant Gate Protection involves technical problems that must be solved correctly. Perey Engineers will help you design a system that will best fulfill your desired function. *Write for booklet.*

PEREY TURNSTILE CO. *WAR PLANT DIVISION* PARK AVE., 40th ST., NEW YORK, N. Y.

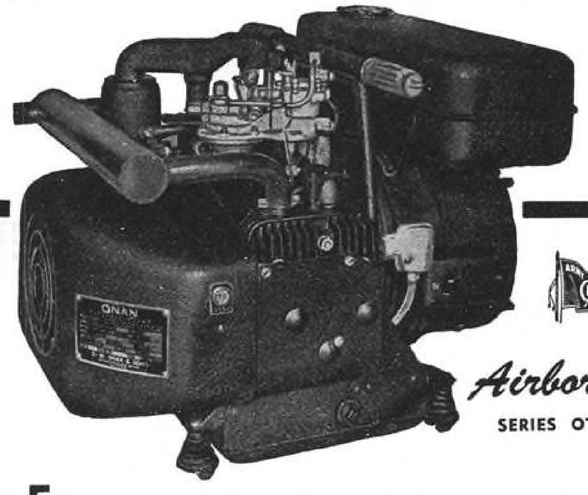

Airborne
SERIES OTC

Electricity for Any Job Anywhere

ONAN GASOLINE DRIVEN ELECTRIC GENERATING PLANTS provide power and light for aviation and aircraft work, for all applications where electricity is not otherwise available, and for emergency service.

They're doing a war winning job on all the fighting fronts.

Sizes from 350 to 35,000 watts. 50 to 800 cycles, 110 to 660 volts, A.C.—6 to 4000 volts, D.C. Also dual A.C. and D.C. output models.

Your inquiry regarding present or post-war needs will receive prompt attention.

D. W. ONAN & SONS, 3116 Royalston Ave., Minneapolis, Minn.

ONAN
ELECTRIC PLANTS

tract advances. As long as Uncle Sam continues to buy all the industry's production, enough cash can be secured to meet running expenses and the war effort will not suffer. Government, it is expected, will accept responsibility for materials specified in the contracts it cancels.

But what of the inventory that cannot be directly traced to a cancelled contract? Every aircraft plant has invested a big share of its so-called profits in stockpiles of all kinds of materials and parts. Huge inventories are an absolute necessity in an industry dealing with more than $15,000,000,000 worth of contracts whether orders are at hand covering such accumulations or not. Otherwise production would bog down at a crucial moment when some supplier's plant is struck or some other contingency arises—as has so often happened in the past and will continue to happen in the future.

An 11 percent decline in the inventory of the average large plane maker would exhaust its working capital, according to a survey made by the Harvard School of Business. And such a decline in inventory values is not only possible but probable after the war. What, then, will be the inventory values of war materials when the fighting stops?


Here is what happened to $1,400,000 worth of cutting tools out in Detroit a short time ago: The whole 110 tons of them were sold for $75,000 when a change in aircraft engine specifications was said to have rendered them obsolete. Semi-finished and finished parts by the hundreds of thousands will suddenly become a drug on the market, since only about 20 percent of the industry's inventory is in raw materials. Most of this inventory will thus have to be sold for scrap.

In the case of cost-plus-fixed-fee contracts the plane maker has no primary responsibility for the inventories. But as Ralph S. Damon, American Airlines vice-president and former president of Republic Aviation Corp., recently explained before the House Naval Affairs Committee, the industry has no clear-cut picture of the amount of government inventory on its hands. Often, he testified, design changes have been made in supposedly "frozen" planes so that, overnight, companies have had to scrap large amounts of government inventory which have been lost in the shuffle since then.

Thus Congress must provide some form of inventory protection, otherwise inventory losses alone may easily wreck this essential American industry.

In the meantime, plant procedure which will assure quick and accurate checkups on government contracted materials is a "must" for the industry. War Department officials assert that it takes

No danger of dinging thin skins with this rivet set!

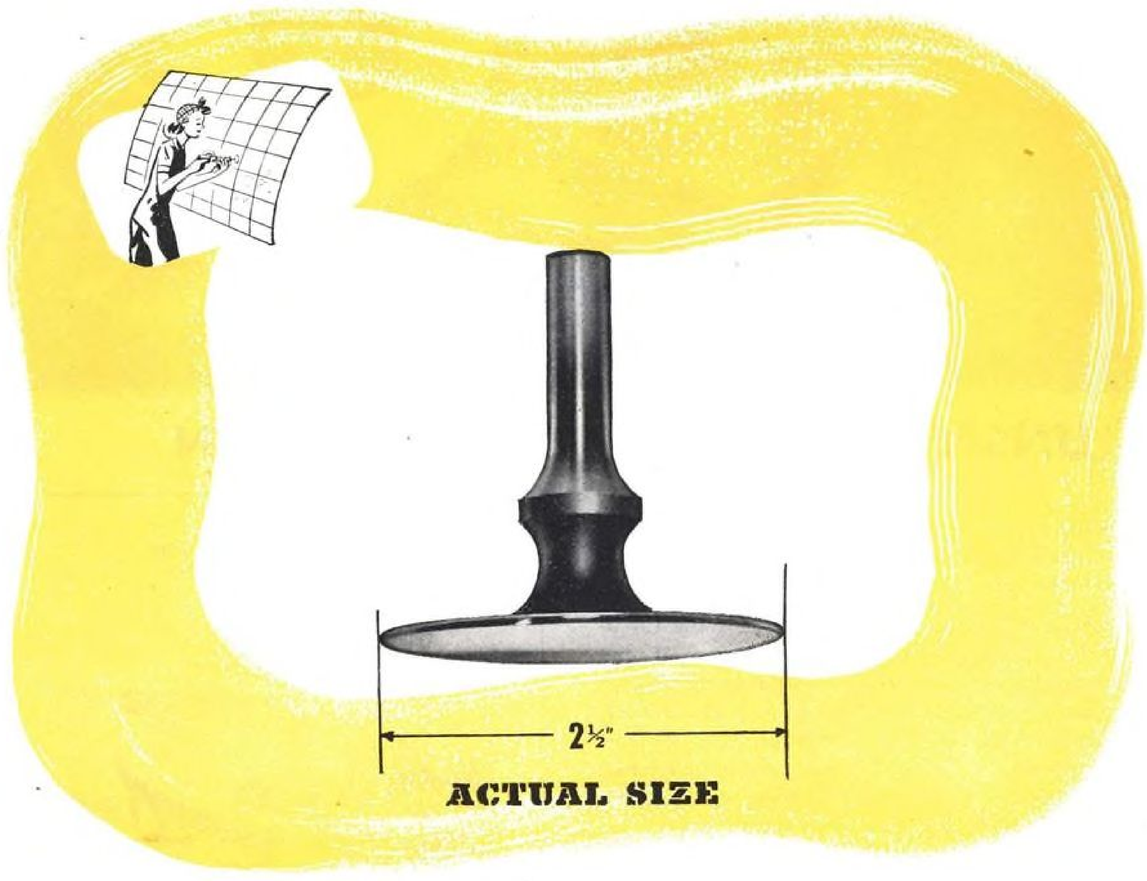

An oversize Microglass finished face (2½" in diameter) plus light weight enable this new type Aero Tool Flush Set to do the difficult job of riveting thin skins *without dinging* Even in the hands of unskilled labor, the extra large face on this set reduces rejects and speeds flush riveting operations.


Forged from tool steel and heat treated according to the latest metallurgical methods, the even grain flow of this flush set has terrific impact resistance and minimum fracture possibility. Aero Tool's exclusive Microglass Finish imparts a mirror-like, ultra-smooth finish to the crown surfaces that protects thin skins from dents and abrasions while riveting.

Write, today, for catalog listing this and other Aero Tool Precision Products for better, faster riveting.

TOOLS ARE WEAPONS—TREAT 'EM RIGHT



AERO TOOL CO.
ENGINEERED AIRCRAFT TOOLS
231 WEST OLIVE AVENUE
BURBANK, CALIFORNIA • DEPT. 000

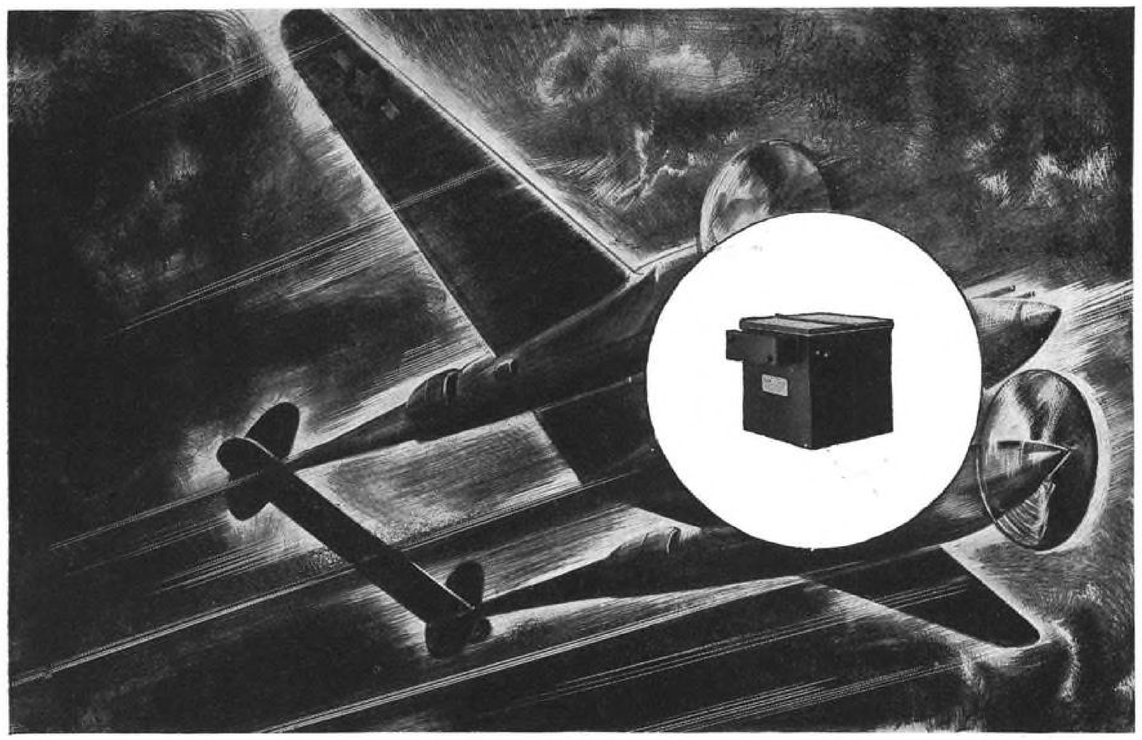

UNSEEN...BUT ON EVERY MISSION

Right at the heart of every plane is an unseen fighter . . . an aircraft storage battery. It's seldom seen, and it's not spectacular, but it's mighty essential.

Since 1917, Exide Aircraft Batteries have earned a distinguished reputation for dependability, long life, and ease of maintenance. This was true of the first aviation batteries which Exide built for planes in World War I, and during the years which followed, Exide Engineers worked closely with plane designers, manufacturers, and the Engineering Divisions of the Armed Forces, in order to improve an already fine performer.

Exides are in most of our finest planes. They're seldom seen, but the boys in the ground crews will tell you they're on every mission.

Exide
AIRCRAFT BATTERIES
IN THE AIR SINCE 1917

Another letter from a flying Exider:



There's always been a lot of team spirit at the Exide plants, and naturally, we're glad to hear from our boys in the armed services. Here's part of a recent letter.

"I have graduated from aircraft armor school, and now am waiting to be assigned to an armor position at some airfield. Another thing—some of the fellows back home think they are not doing their part; but if only a few of them could see where those batteries they make go, they'd be proud. As armorer, I have to check switches and cables in planes, and I sure see a lot of Exides."

THE ELECTRIC STORAGE BATTERY COMPANY, Philadelphia
Exide Batteries of Canada, Limited, Toronto

BACK THE ATTACK WITH WAR BONDS

New type
RATCHET WRENCH
Speeds Airplane Assembly



SPEED-RATCH

REMOVES OR TIGHTENS NUTS *in a Jiffy*

BEALL SPEED-RATCH is the new, improved Ratchet Wrench with patented pull-chain in handle. Quickly and easily tightens or loosens nuts at the hard-to-get-at spots, without finger manipulation. Saves time and speeds airplane assembly and mechanical production. *List price,* **$6.00**

Manufactured by the makers of
BEALL SPRING WASHERS

WIRE US your requirements
BEALL TOOL COMPANY
Div. Hubbard & Company
EAST ALTON, ILLINOIS

BUS-BAR
Formed in 2 PLANES to .001" ACCURACY



With DI-ACRO Bender No. 2

Many electrical and other parts can be duplicated without dies, saving Man Hours and Critical Materials and helping to meet rush delivery schedules. DI-ACRO Precision Machines—Shears, Brakes, Benders—form angle, channel, rod, tube, wire, moulding, strip stock; bimetals, di-electrics, sensitized materials, fiber slot insulation, frequency reeds, etc.

½ ACTUAL SIZE
A heavy Copper Bus-Bar for panel board and terminal assemblies is shown, accurately duplicated in two planes. DI-ACRO Bender No. 2 has a forming radius up to 6" and capacity of ½" cold rolled solid steel bar or equivalent.

Send for Catalog "METAL DUPLICATING WITHOUT DIES"

O'NEIL-IRWIN DI-ACRO MFG. CO.
358 Eighth Ave. So., MINNEAPOLIS 15, MINN.

the average contractor 4½ mo. to get his claim data together. In many cases inventories are believed to be increasing even though unfilled orders are static or are increasing at a much reduced rate. The Controlled Materials Plan should have reduced the amount of inventory held in such cases, but it is doubtful if all manufacturers have taken full advantage of CMP.

Regardless of what may be done to clarify the picture, personnel must be trained to handle inventories of terminated contracts and to devise the proper forms, procedures, and instructions necessary to obtain itemized schedules of supplies, subcontractors, stocked materials, and work in progress. Purchasing systems also will have to be reviewed to make sure new inventory is not in excess of needs.

So, despite the best efforts of WPB to arrive at uniform termination rules and procedures, Congress alone can bring order out of the present confusion. There is (1) the status of the general accounting office to clarify, (2) creation of an impartial court of claims to which prime contractors and subcontractors may turn when necessary, and (3) passing of enabling legislation to relieve contracting officials of individual liability for settlements subsequently considered excessive.

There is a desperate need for mandatory legislation to free the money tied up in war work upon cancellation. Unless some liberal method is promptly devised, all other plans of the aircraft industry for its peacetime reconversion will be of little avail. Advance payments of as much as 90 percent are needed. Spokesmen for other industries that are in much better financial shape to weather termination are asking for no less than 75 percent immediately on their verified claims.

Prime contractors also would like to have the government settle all subcontract claims above $25,000, thus obviating the necessity for the industry to deal with hundreds of termination supply claims. Severance pay for employees is another nightmare. With this, Congress alone can cope—for certainly an industry whose liquid assets are sufficient only to meet a two weeks' payroll can't be expected to.

Then there are the questions of: One over-all claim regardless of the number of contracts involved; one department negotiating for all the government departments involved; legislation to legalize defective contracts undertaken in good faith; reimbursement for termination expenses; and the salvaging of surplus equipment.

Aircraft officials would like to know whether the large or small companies are to have their contracts terminated first and whether contracts are to be terminated immediately after the war



A SPECIAL HEAD

was required to design this job in the way we did it. We had to have precision and uniformity and, at the same time, use a minimum of material. It is a good job — serves its purpose perfectly. The same heads which handled this production problem are waiting to go to work for you, if you want machine screws — or fastenings in standard or special design and all types of heads. Also plastic insets and similar items.

If you haven't our catalog — please write for it.

NEW ENGLAND SCREW CO.
KEENE, NEW HAMPSHIRE
INCORPORATED 1892

"Oomph" DRAFTING

RE-SURFACE
Worn Boards. Modernize New Boards.
PRECISION-IZE
Pencil Drawings For Perfect Prints.
RELIEVE
Shortages of Men and Materials.
SPEED
Production, Yet Cut Costs.

NO-INK Drawing Board TOP

Adopted as Standard By Major Industries

Resilient drawing surface produces a sharp, opaque stroke in the drawing—results in perfect prints—makes inking unnecessary. The most perfect, most delightful surface to work on.

10 Years More Use From Old or Discarded Boards

Users are reordering in quantity. Over 25,000 NO-INK Drawing Board Tops already in use, saving man-hours, speeding production, renewing discarded boards, modernizing new boards. Costs so little.

We cut Tops to exact board size, no matter how large or how small. Attached by anybody in 10 minutes, ready for immediate use. Economize, modernize your drafting procedure. Write for catalog, prices and trial offer.

Est. 1911. Over 30 Years of Guaranteed Customer Satisfaction
W. H. LONG COMPANY, 425 N. Clark St., Chicago 10, Ill.



By Uncle Sam...

QUIET IS REQUESTED

About Military Information!

★ ★ ★

HOME OF THE Hawaiian Room

Hotel Lexington

Charles E. Rochester, V. P. & Mng. Dir.

LEXINGTON AVE. AT 48th ST., N. Y. C. 17

BALDOR

BALL BEARING GRINDERS

for HEAVY-DUTY Service



BALDOR GRINDER No. 704, ball-bearing, and substantially built for heavy-duty, precision grinding; equipped with Capacitor Type, ½ h. p. Motor; (110 volts, single phase, 3400 r.p.m.) WON'T BURN OUT. 7" x 1" wheels; large, adjustable, cast iron Tool Rests. Net weight, 70 lbs. Fully Guaranteed for 1 year $39.00

Bench & Pedestal Types

ASK FOR BULLETIN 307

BALDOR ELECTRIC COMPANY

4380 Duncan Ave. St. Louis 10, Mo.

BALDOR GRINDERS

built by Motor Specialists

or if a "tapering off" policy will be followed.

There is no definite indication today as to what the government intends to do on these legislative needs and policy matters. And right in the middle of all the indecision regarding contract termination stands the largest industry in the world, its peacetime fate depending on the orderly solution of these complicated problems.

Practical Congressional action, which is essential to solution of these pressing problems, is certainly deserved by any industry which has turned out as excellent a job as the aircraft and engine producers.

Analysis of Moments of Inertia

(*Continued from page* 154)

into evidence the following characteristics of the member:

1. *Fixed-End Moments.* If a member is so restrained that the ends do not rotate and its relative deflection is zero, the resulting end moments are called fixed-end moments. These moments will be represented by m_{12} and m_{21}, exerted upon ends 1 and 2, respectively. Their expression may be found by making $\omega_1 = \omega_2 = R = 0$ in equations (13); thus

$$m_{12} = \frac{Al\,(b_2 - a_2)}{C\,(c_2 - b_2)}, \; m_{21} = \frac{Al\,(c_2 - a_2)}{B\,(c_2 - b_2)} \qquad (14)$$

2. *Stiffness.* This may be defined as follows (Ref. 2): Stiffness is the moment at one end of a member necessary to produce unit rotation at that end when the other end is fixed, it being assumed that the member is not loaded and that $R = 0$. Therefore, making $A = 0$, $\omega_1 = 1$, $\omega_2 = 0$, $R = 0$ in the first of equations (13), the resulting M_{12} is the stiffness at end 1; denoting it by S_{12},

$$S_{12} = \frac{l\,b_1}{C\,(c_2 - b_2)} \qquad (15)$$

$$\text{Similary, } S_{21} = \frac{l\,c_2}{B\,(c_2 - b_2)} \qquad (16)$$

3. *Carry-Over Factors.* These may be defined as follows (Ref. 2): If one end of a member is rotated while the other end is held fixed, the ratio of the moment at the fixed end to the moment producing rotation at the rotating end is called the carry-over factor at the rotating end. It is again assumed that $R = 0$ and there are no superimposed loads. Therefore, the ratio $\frac{M_{21}}{M_{12}}$, obtained from equations (13) in which A, ω_2 and R are made equal to zero, is the carry-over factor at end 1, designated here by c_{12}; thus

$$C_{12} = \frac{C.\,c_1}{B.\,b_1} \quad \text{or} \quad c_{12} = \frac{b_2}{b_1} \qquad (17)$$

because of (12). In the same manner,

ARMSTRONG

The Socket Wrench with the DRIVELOCK

Have you tested the ARMSTRONG Vanadium Super Quality Socket Wrenches featuring the patented ARMSTRONG DRIVELOCK? This exclusive Armstrong feature locks socket to driver, driver to extension, extension to handle—heads positively will not knock off. These are the only safe wrenches to use around moving machinery. Parts are quickly and easily detachable.



ARMSTRONG Socket Wrenches come in all sizes and types, singly or in sets. Ratchets are drop forged. Write for Catalog.

Armstrong Bros. Tool Co.

"The Tool Holder People"


348 N. Francisco Ave. Chicago, U.S.A.

Eastern Warehouse & Sales
199 Lafayette St., New York



BIRTCHER AIRCRAFT RELAYS

TYPE B5-A



Meets Army Air Corps Specifications 94-32351-A and other applicable specifications

PROMPT DELIVERY!

THE BIRTCHER CORPORATION

Manufacturers AIRCRAFT, RADIO and RADAR PARTS

5087 HUNTINGTON DR. LOS ANGELES 32

ELECTROL HYDRAULICS

Out of war-born necessity, Electrol has accomplished "modern miracles" in the field of Hydraulics. The "Grumman Hellcat" is but another of the many Army and Navy planes equipped and controlled by these most perfect of precision units. Built for frequent and unfailing split second operation under the pressure of a modernized war's exacting demands, they *must not* and *do not* fail. "Hit the deck, sailor" is no idle command for the "fightinest" of Navy-carrier-based planes, and Electrol Hydraulics are the pilot's positive assurance that his "wheels are down" with sure control and safety. Just one of Electrol's many important functions.

ELECTROL INCORPORATED · KINGSTON, NEW YORK




FOR VICTORY
BUY UNITED STATES
WAR BONDS and STAMPS

IMPACT STRENGTH OF

Plexiglas

PROVED BY MEASURED BLOWS

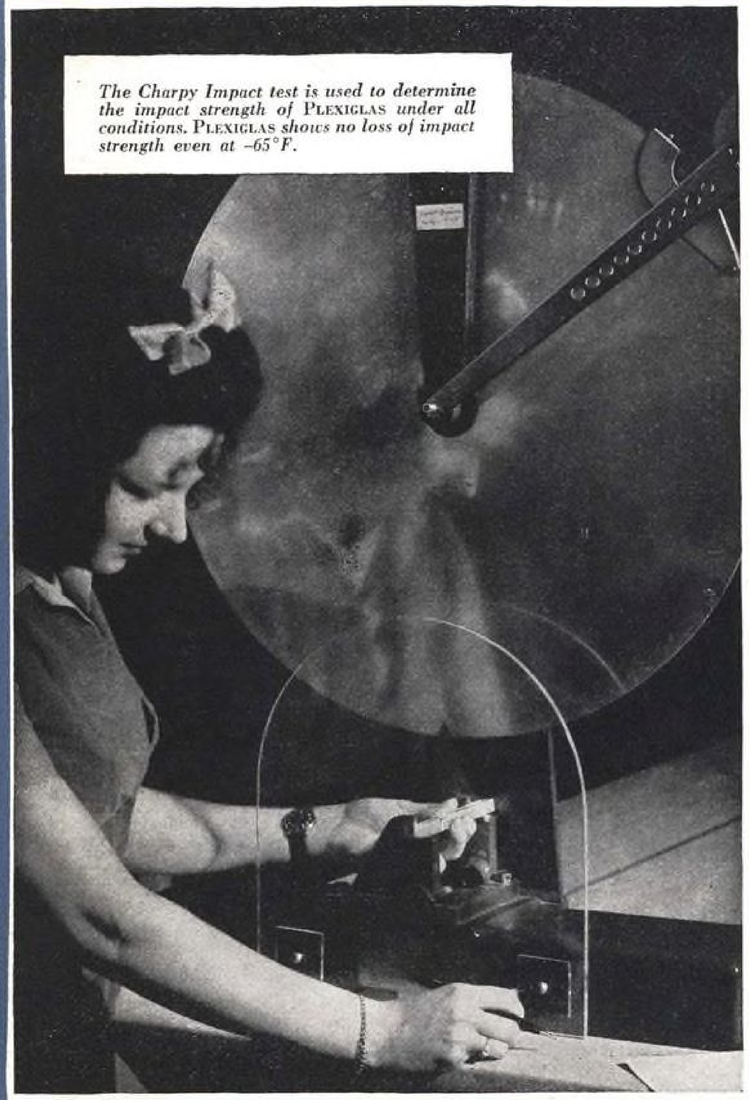

The Charpy Impact test is used to determine the impact strength of PLEXIGLAS *under all conditions.* PLEXIGLAS *shows no loss of impact strength even at –65°F.*

IMPACT strength, tensile, compressive, flexural, and shear strength, hardness and cold flow are a few of the important PLEXIGLAS properties described in detail in the new PLEXIGLAS *Mechanical Properties* Manual. Published by Rohm & Haas to help speed the use of PLEXIGLAS in war production, this new handbook contains graphs and photographs never published before.

Write our Philadelphia office for your copy.

★ ★ ★

Rohm & Haas Company, Washington Square, Philadelphia, Pa. *Other offices in:* South Gate, Los Angeles—Detroit—Chicago. *Canadian Distributor* — Hobbs-Glass Ltd., Montreal, Canada.

★

PLEXIGLAS

CRYSTAL-CLEAR ACRYLIC SHEETS, RODS AND MOLDING POWDERS*

★

**Formerly* CRYSTALITE *Molding Powders*

PLEXIGLAS *and* CRYSTALITE *are the trade-marks, Reg. U. S. Pat. Off., for the acrylic resin thermoplastics manufactured by the Rohm & Haas Company.*

ROHM & HAAS COMPANY

WASHINGTON SQUARE, PHILADELPHIA, PA.

Manufacturers of Chemicals including Plastics . . . Synthetic Insecticides . . . Fungicides . . . Enzymes . . . Chemicals for the Leather, Textile and other Industries

the carry-over factor at end 2 is:

$$c_{21} = \frac{c_1}{c_2} \tag{18}$$

The following self-evident relation may be useful for checking:

$$c_{12}\, S_{12} = c_{21}\, S_{21} \tag{19}$$

Equation of Three Moments

Using relations (14) and solving equations (13) for ω_1 and ω_2

$$\omega_1 = \frac{C}{l}\left[(M_{12} - m_{12})c_2 - (M_{21} - m_{21})c_1\right] + R$$
$$\omega_2 = \frac{B}{l}\left[-(M_{12} - m_{12})b_2 + (M_{21} - m_{21})b^1\right] + R \tag{20}$$

If member 1-2 belonged to a string of continuous beams, this member and the adjacent one, 2-3, would both rotate through the same angle at joint 2; the rotation at this joint, considered belonging to member 1-2, is given by the second of relations (20); the rotation at the same joint, considered belonging to member 2-3, is obtained by the first of these relations, applied to this member. Using prime numbers to indicate member 2-3 and equating both expressions of the rotation at joint 2, the following relation is obtained

$$\frac{B}{l}\left[-(M_{12} - m_{12})b_2 + (M_{21} - m_{21})b_1\right] + R = \frac{C_1}{l}\left[+(M_{23} - m_{23})c' - (M_{22} - m_{22})c_1\right] + R \tag{21}$$

Because of continuity, $M_{21} + M_{23} = 0$; also, in conformity with sign conventions universally used in the equations of three moments, moments over supports will be considered negative if they result in tension in the upper sides of members; therefore, M_{12} will be replaced by $+M_1$, M_{21} by $-M_2$, M_{23} by $+M_2$, M_{32} by $-M_3$, m_{21} by $-m_{21}$, m_{32} by $-m_{32}$. Relation (21) then takes the following form:

$$M_1\frac{Bb_2}{l} + M_2\left(\frac{Bb_1}{l} + \frac{C'c'}{l^1}\right) + M_3\frac{C_1c_1}{l^1} = \frac{B}{l}\left(m_{12}\, b_2 + m_{21}\, b_1\right) + \frac{C_1}{l_1}\left(m_{23}\, c_2' + m_{32}\, c_1'\right) + R - R' \tag{22}$$

This is the general equation of three moments representing a relation between the moments at three consecutive supports in a series of continuous beams.

Case Application

The formulae derived above will be applied to the particular case of a beam with uniform I and constant E. It will be assumed that the loading consists in a uniform load of w lb. per ft.

For this case, m/EI is represented by a parabola, x/EI and $(l-x)/EI$ by straight lines. As a result

$a_1 = a_2 = 1/2$, $b_1 = c_2 = 2/3$, $b_2 = c_1 = 1/3$

$$A = \left(\frac{w\cdot l^2}{8} \times 2l/3\right)/EI = wl^3/12EI, \tag{23}$$

$$B = C = \frac{l}{EI} \times \frac{l}{2} = l^2/2EI$$

Letting $I/l = k$, the several formulae derived for the general case reduce to the well known expressions:

$$M_{12} = 2EK(2\omega_1 + \omega_2 - 3R) - \frac{wl^2}{12}$$

$$M_{21} = 2EK(\omega_1 + 2\omega_2 - 3R) + \frac{wl^2}{12} \tag{13}'$$

$$H = -\frac{6EK}{l}(\omega_1 + \omega_2 - 2R) \quad (\text{for } w = o) \tag{13A}'$$

$$m_{12} = -\frac{wl^2}{12} \quad ; \quad m_{21} = +\frac{wl^2}{12} \tag{14}'$$

$$S_{12} = S_{21} = 4EK \tag{15}' \ (16)'$$

$$c_{12} = c_{21} = \frac{1}{2} \tag{17}' \ (18)'$$

$$\omega_1 = \frac{1}{6EK}\left(2M_{12} - M_{21} + \frac{wl^2}{4}\right) + R$$

$$\omega_2 = \frac{1}{6EK}\left(-M_{12} + 2M_{21} - \frac{wl^2}{4}\right) + R \tag{20}'$$

$$\frac{M_1}{K} + 2M_2\left(\frac{1}{K} + \frac{1}{K'}\right) + \frac{M_3}{K'} = -\frac{wl^2}{4K} - \frac{wl^2}{4K'} + 6E(R - R') \tag{22}'$$

(Positive Moments cause tension in bottom fibers)

Illustrative Problem

Fig. 5 represents a twin-boom system forming a rigid frame. Problem: Find deflections and moments at joints due to a force F applied as shown.

AETNA *HAS OVER ONE HALF MILLION FEET OF*

AIRCRAFT PLYWOOD

Available for Immediate Delivery

Made according to AN-NN-P-511b Specifications in both Standard and Odd Sizes and a Variety of Approved Woods. Quality Certified. Shipment the Same Day your order is received.

AETNA PLYWOOD & VENEER

Orders requiring special manufacture will receive prompt attention

1721 Elston Avenue
CHICAGO 22, ILLINOIS
Phone: ARMitage 7100

STOCK LIST FURNISHED UPON REQUEST

Going... WHERE THEY WILL DO THE MOST GOOD



Krane Kars are going into the Nation's airplane plants and to the Army and Navy air stations all over the globe. Selected for their speed of operation and efficiency . . . fast traveling; fast boom swinging and topping; fast load hoisting and lowering . . . these functions are operable independently or simultaneously.

USERS: Lockheed, Republic, Boeing, North American, Curtiss-Wright, Consolidated, etc.

Send for Literature

Krane kar

SILENT HOIST WINCH & CRANE CO.
846-63rd ST., BROOKLYN, N.Y.

STURTEVANT

Permanently Accurate
TORQUE WRENCH

War Plane Specifications Require Torquing

Modern manufacturing methods call for controlled "settings" of vital nuts, screws, bolts, hydraulic fittings—of almost all threaded parts. Leading American aircraft and engine builders almost universally use the permanently accurate STURTEVANT TORQUE WRENCHES for innumerable applications ranging from building precision instruments to testing frictional drag in controls and motors. 50 models, capacities ranging from 0 to 5 inch pounds or up to 7200 inch pounds.

Write for catalog sheets.



Model F-100-1 (Capacity 0-100 in. lbs.) Illustrated

P.A. STURTEVANT CO.
ADDISON QUALITY ILLINOIS

B-H

MANUFACTURERS of SHEET METAL and TUBULAR ACCESSORIES

OARS & PUMPS

CONTRACTORS TO ALL LEADING ENGINE and PROPELLER MANUFACTURERS

B-H AIRCRAFT CO.

LONG ISLAND CITY NEW YORK



All ambitious production men who are genuinely interested in self-improvement—in preparing for the future—are invited to send for "Forging Ahead in Business." This valuable booklet outlines the Institute's time-tested training plan. It was prepared by the Staff in cooperation with prominent industrialists.

"How to Prepare an Engineering Report," a helpful 72-page guide ordinarily available only to subscribers, will be sent with "Forging Ahead in Business" while the supply lasts.

If you are sincerely interested in having these two books, send for your FREE copies today!

ALEXANDER HAMILTON INSTITUTE
Dept. 76, 73 W. 23rd Street, New York 10, N.Y.
Canada: 54 Wellington St., West, Toronto, Ont.

Please mail me a copy of the 64-page book—"FORGING AHEAD IN BUSINESS," and also a copy of "HOW TO PREPARE AN ENGINEERING REPORT," both without cost.

Name.....

Business Address.....

It is assumed that joints 1 and 4 are fully restrained and that the moments of inertia vary linearly between the values shown at the indicated stations. All units are in pounds and inches.

There being no superimposed loads on the members, diagrams A vanish. Diagrams x/EI and $(l\text{-}x)/EI$ for member 1-2 (and 4-3) are shown in Figs. 6 and 7. Fig. 8 represents diagram x/EI for member 2-3; because of symmetry, there is no need to draw diagram $(l\text{-}x)/EI$ for this member.

Following values are obtained by decomposition of areas into trapezoids:

$B = 83.5/E \quad b_1 = .785 \quad b_2 = .215$
$C = 41.2/E \quad c_1 = .434 \quad c_2 = .566$
(members 1–2 and 4–3)

$B' = C' = 40.5/E \quad b_1' = c_2' = .672$
$b_2' = c_1' b_1' = .328$ (member 2–3)

End moments are expressed as follows

$$M_{12} = 373E \times (.215\omega_2 - R) \div (41.2 \times .351) \quad (24)$$
$$M_{21} = 373E \times (.566\omega_2 - R) \div (83.5 \times .351) \quad (25)$$
$$M_{23} = 336E \times (.672\omega_2 + .328\omega_2) \div (40.5 \times .344) \quad (26)$$

Shear in member 1-2 is given by:

$$\frac{F}{2} = -\frac{E}{.351}\left[\frac{\omega_2}{83.5} - R\left(\frac{1}{83.5} + \frac{1}{41.2}\right)\right] \quad (27)$$

Condition $M_{21} + M_{23} = 0$ gives:

$$31.2\omega_2 - 12.65R = 0 \quad (28)$$

Solve equations (27) and (28) for ω_2 and R:

$$\omega_2 = 2.28F/E \quad , \quad R = 5.6F/E$$

Replacing in (24), (25), and (26):

$$M_{12} = -132F \quad M_{21} = -55F \quad M_{23} = +55F.$$

References

(1) G. E. Large and C. T. Morris, Lateral Loads on Members of Variable Section, *Bulletin 66*, Ohio State Univ., Engineering Experimental Station, 1931.

(2) Hardy Cross, Analysis of Continuous Frames, with discussions, *Transactions Am. Soc. of Civ. Engineers*, 1932.

(3) W. H. Weiskopf and J. W. Pickworth, Tapered Structural Members, an Analytical Treatment, with discussions, *Transactions Am. Soc. of Civ. Engineers*, 1937.

(4) J. P. Emshwiller, *Shape Factors and End Moments for Structural Members*, Library of Congress, 1941.

(5) Portland Cement Association, Concrete Beams and Columns With Variable Moment of Inertia, *Bulletin No. ST 41*. (See list of references in this bulletin.)

(6) A. S. Niles and J. S. Newell, *Airplane Structures*, John Wiley, 1938.

(7) A. Amirikian, *Analysis of Rigid Frames*, United States Gov't. Printing Office, Washington, 1942.

Aircraft Production Analysis

(*Continued from page* 152)

in some instances, two or more assistants may be required. The unit lead planner and his assistants should be responsible for the complete development of the detail procedures.

Upon receipt of engineering production release drawings, production illustrations, and production breakdown drawings, a study should be made to determine a schedule of final assembly for major structural units relative to the estimated assembly time required, jigs and fixtures required, possible manhours applied per unit, major unit priority, minor unit feeder-lines, and minor unit priority. A preliminary stage analysis should then be undertaken, and a thorough study of major and minor unit functional installations should be made in order to determine functional unit installation priority and sequence of assembly (each functional installation unit being considered a basic stage). This may best be accomplished by establishing a card file system of major and minor units, listing all related installation subassemblies for each major or minor unit stage, less those items installed in subassembly, arranging the corresponding unit production illustrations to match for reference purposes, and rearranging both file systems as changes are made.

This preliminary study will establish all unit installation priority and sequence of assembly, preliminary routing, and production control depots or

Filtrine
HIGH EFFICIENCY

WATER FILTERS

FOR PHOTOGRAPH DEVELOPING, FILM PROCESSING, ETC.

Photographic film, X-ray and print processing requires water free from suspended matter, such as rust, clay, etc. Clean, conditioned water, free from impurities, will improve the appearance of the finished film or print. Filtrine Filters are guaranteed to remove all suspended matter. In use for over 40 years.

Write for complete information

FILTRINE MANUFACTURING CO.
53 Lexington Ave., Brooklyn 5, N. Y.



Welded-Metal
TIME SAVERS
For Plane Builders

As Designed by
Your Engineers or Ours

The Welded-Metal Time Savers; such as slings, cradles, dollies and jacks, which we are fabricating for plane builders and their sub-contractors; are of various designs and for many specific purposes. Most are specially designed. Others are more or less standard equipment in plane plants. All are equally efficient for aircraft maintenance and repair. Send us your blue prints and specifications for a prompt quotation, or we will gladly submit our own designs and recommendations.


Moulded Plywood Nose, engineered and fabricated by us for Consolidated Cargo Ship


AVIATION ENGINEERING
INCORPORATED
T. Edward Moodie, Executive Vice President
1300 BLASHFIELD S. E. ATLANTA, GEORGIA

Fabricators of—

Moulded PLYWOOD Plane Parts

We are also staffed and equipped to make Plywood Plane Parts by the bag-moulded process. Such components are made to exact tolerances to facilitate assembly by builders of military aircraft. Ask us how Moulded PLYWOOD Parts may help you.

WELDED-METAL AIRCRAFT COMPONENTS

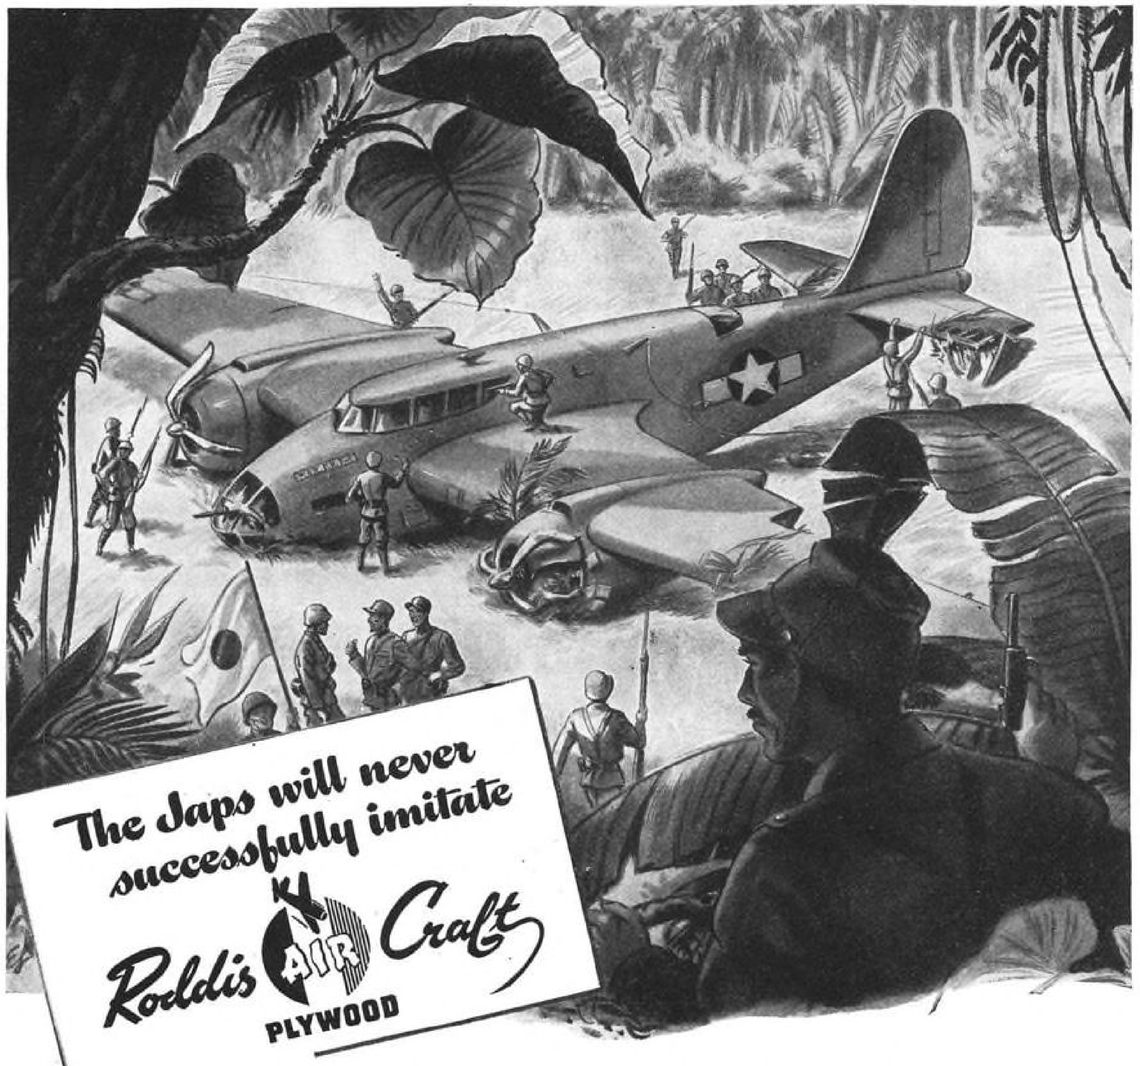

If a plane or glider constructed of Roddis aircraft plywood should fall into the hands of enemy imitators, they'll get scant comfort from it. The closest examination won't impart the skill and craftsmanship that went into its production.

Tests will prove the rugged strength of Roddis aircraft plywood. Dissection will reveal the perfect bonding—show that moisture, heat, pressure, time, and bonding agent all have been exactly and skillfully applied and controlled.

But it takes more than a knowledge of the physical factors of production to create Roddis aircraft plywood — it takes craftsmanship, skill, knowledge of wood — extra "know how" which has identified Roddis wood products for over 50 years—and which today is reflected in uniformity of quality that sets the pace for the aircraft plywood industry.

Plane and glider manufacturers are invited to consult with Roddis men located at our warehouses shown below.

RODDIS LUMBER AND VENEER COMPANY
Marshfield, Wisconsin

RODDIS COMPANY
1435 W. 37th St., Chicago 9, Ill.

RODDIS LUMBER AND VENEER COMPANY
4601 W. State St., Milwaukee 8, Wis.

RODDIS LUMBER AND VENEER CO. OF MISSOURI
2729 Southwest Blvd., Kansas City 8, Mo.

RODDIS PLYWOOD AND DOOR COMPANY, INC.
15 Carleton St., Cambridge 42, Mass.

RODDIS PLYWOOD AND DOOR COMPANY, INC.
515 W. 36th St., New York City 18, N. Y.

RODDIS LUMBER AND VENEER CO. OF MISSOURI
2615 Latimer Street, Dallas, Texas


RODDIS LUMBER AND VENEER CO. OF MISSOURI
727 N. Cherry St., San Antonio, Texas

RODDIS PLYWOOD AND DOOR COMPANY, INC.
Review and Greenpoint Avenues
Long Island City, New York

RODDIS PANEL AND DOOR COMPANY
457 E. Sixth St., Cincinnati, Ohio

RODDIS PANEL AND DOOR COMPANY
1204 W. Ormsby Ave., Louisville, Ky.

RODDIS LUMBER & VENEER CO.
MARSHFIELD, WISCONSIN

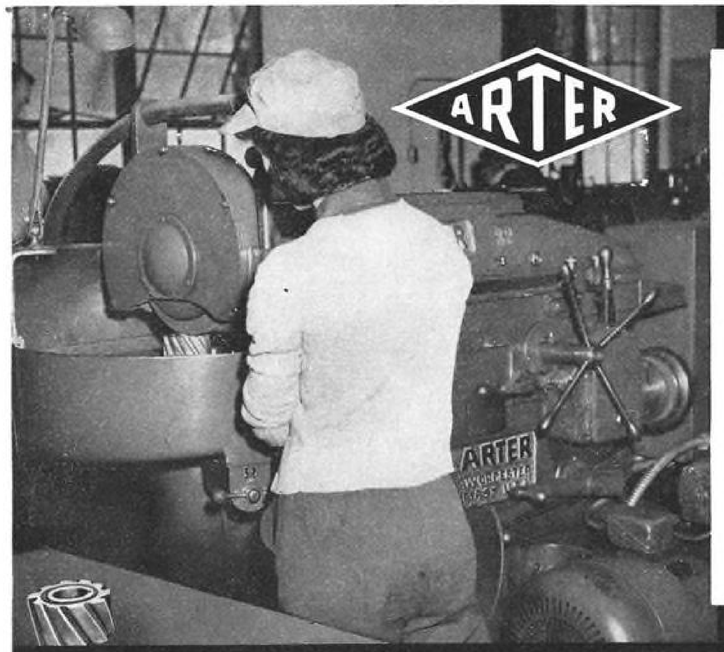

• In the plant of F. H. Robertson, Malden, Mass., manufacturing cutters and precision tools . . . woman operative grinding cutters on an ARTER ROTARY SURFACE GRINDER . . . one of the many important grinding jobs for this machine. Patriotic women war workers are able to take men's places in this work because of the ease of operation and readily available adjustments provided by this versatile grinder.

Many are the precision grinding jobs that are being done by the happy combination of patriotic women workers and ARTERS.

ARTER GRINDING MACHINE COMPANY
WORCESTER, MASSACHUSETTS • U. S. A.

stations, a basis for production prototype shop development, a basis for detailed station analysis, and preliminary feeder-line routing.

Let's Be Calm About the Helicopter

(*Continued from page* 115)

the needs of some specific operation to which it is naturally adapted, that day will mark the true beginning of rotary-wing progress. I have no doubt that progress will be swift and astounding.

To date we have been concerned with making the thing fly and controlling it when it does. Those problems have now been licked. But we haven't yet got the ultimate solution, because the diversion of power from lift to effect control is no more the ultimate answer than the mechanical complexity of twin rotors. Still, today's solutions point the way to the ultimate solution and it will not be slow to follow.

We will scarcely recognize the helicopter of tomorrow in the crude attempts we are making today. But these attempts will have proven themselves more than worthwhile if we can but cling to the ideal of making this ship a useful, working aircraft—if, at this particular stage, we can definitely get rid of this ballyhoo about housewives and pleasure flying.

What Makes a Mailing Click?

Advertising men agree . . . the list is more than half the story. McGraw-Hill Mailing Lists, used by leading manufacturers and industrial service organizations, direct your advertising and sales promotional efforts to key purchasing power.

In view of present day difficulties in maintaining your own mailing lists, this efficient personalized service is particularly important in securing the comprehensive market coverage you need and want. Investigate today.



McGraw-Hill Publishing Co., Inc.
DIRECT MAIL DIVISION
330 West 42nd Street, New York, 18, N. Y.

Changed Your ADDRESS?

Let us know so that we can keep copies of Aviation coming promptly.

TO: Circulation Dept.,
Aviation,
330 West 42nd Street,
New York, 18, N. Y.


Name .....

Old Address .....

New Address .....

Company .....

Title .....

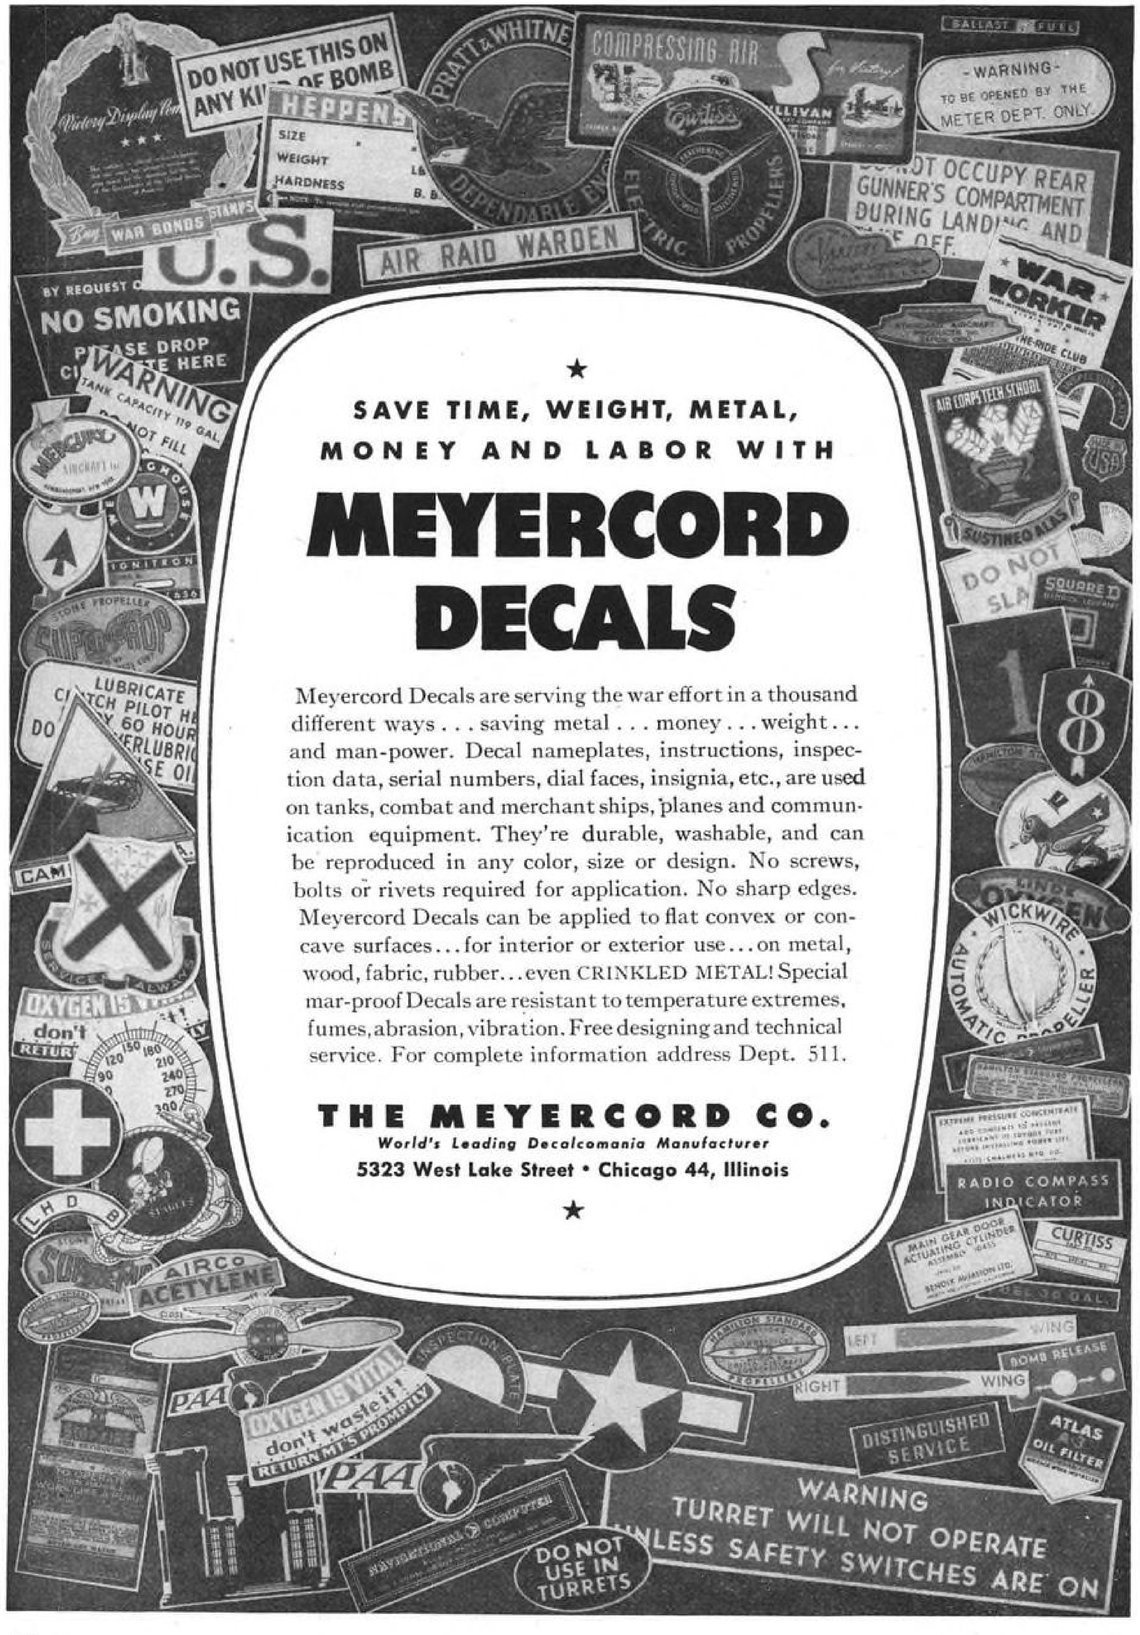

★

SAVE TIME, WEIGHT, METAL, MONEY AND LABOR WITH

MEYERCORD DECALS

Meyercord Decals are serving the war effort in a thousand different ways . . . saving metal . . . money . . . weight . . . and man-power. Decal nameplates, instructions, inspection data, serial numbers, dial faces, insignia, etc., are used on tanks, combat and merchant ships, planes and communication equipment. They're durable, washable, and can be reproduced in any color, size or design. No screws, bolts or rivets required for application. No sharp edges. Meyercord Decals can be applied to flat convex or concave surfaces . . . for interior or exterior use . . . on metal, wood, fabric, rubber . . . even CRINKLED METAL! Special mar-proof Decals are resistant to temperature extremes, fumes, abrasion, vibration. Free designing and technical service. For complete information address Dept. 511.

THE MEYERCORD CO.

World's Leading Decalcomania Manufacturer

5323 West Lake Street • Chicago 44, Illinois

★




DECISIVE BLUEPRINTS!

New tanks, guns, ships, planes are constantly being designed on paper. There must be literally thousands of designs before manufacturing begins on a war machine. A bomber, for instance, may require 18,000 detailed drawings of its different parts.

You designers and draftsmen who make these drawings have no time to experiment with pencils. Experience teaches that choosing the best pencil is the quickest way to finish the job.

Therefore, it's the natural thing to choose Dixon's *Typhonite* ELDORADO pencils.

As a blueprint explains the plane to an expert, so does a little book explain Dixon's *Typhonite* ELDORADO pencils to the draftsman. Send to us for a free copy of this blueprint of a drawing pencil. Watch your technique improve and your work speed up when you switch to *Typhonite* ELDORADO drawing pencils.

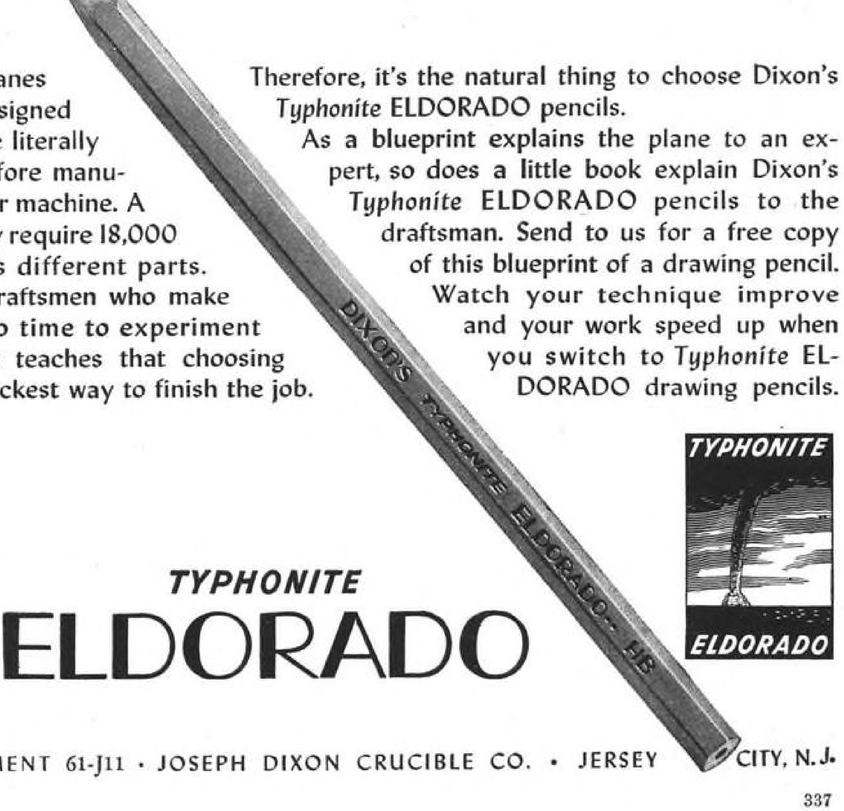

TYPHONITE

ELDORADO

PENCIL SALES DEPARTMENT 61-J11 · JOSEPH DIXON CRUCIBLE CO. · JERSEY CITY, N.J.

GRATON AND KNIGHT

GRATON & KNIGHT ENGINEERS *Present* PACKINGS POINTERS


No. 3 in a series of articles discussing the fundamentals of packings design and application. The first four articles will deal briefly with the four common packing types. Other phases of selection and application will be discussed later.

Reprints of each article are available, free. If you would like to make a collection, please write to Packings Department G, Graton & Knight Company, Worcester 4, Massachusetts.



THE "U" PACKING — The "U" is the packing most commonly used in a stuffing box to seal a reciprocating piston.

Installed in the stuffing box with the sealing lip facing the pressure medium, the flexible legs of the "U" are free to expand under the pressure of the medium, forming a seal on both the inside and outside peripheries.

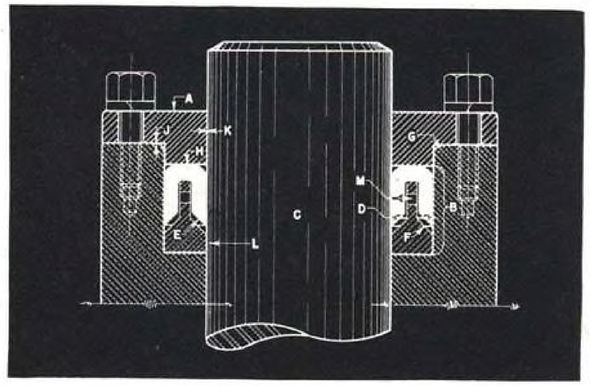

DESIGN CHARACTERISTICS

A. A packing follower (or "gland") is used to hold the "U" packing in the packing recess. **B.** The packing recess (or "stuffing box"). **C.** Reciprocating piston. **D.** A "throat ring" or "pedestal ring" is used to support the packing and prevent collapse when the pressure is off. When the follower is tight at J, a *very light* squeeze is exerted on the base of the U to hold it in correct position. (Flax fillers are sometimes used *in place of* pedestal ring.) **E.** Bevel on "U" packing. **F.** Bevel on throat ring. **G.** Taper on recess for ease in assembly. **H.** Square nose on follower. (Sharp corner of concave nose will damage packing.) The top of the packing will soon conform to the shape of the recess. **J.** Metal to metal contact. **K.** Minimum working clearance. **L.** Vertical grooves for free admission of medium to packing. **M.** Holes drilled through ring allow the pressure medium to act on the outside leg of the U.

CLEARANCES

1. Between the bevel (F) of the throat ring and the bevel (E) of the packing, to protect the lip of the packing and to permit the pressure to enter and spread the U.

2. Between the throat ring and the inside wall of the packing to prevent binding — 1/3 leather thickness.

3. Radius at top of throat ring to prevent cutting the packing.


4. Between follower and piston. The smaller the clearance, the longer the life of the packing. Excessive clearance, which permits extrusion of the packing, causes about one half of all packing failures.



World's Largest Industrial Leather Plant

GRATON & KNIGHT *Engineering*

GRATON & KNIGHT *Recommendations at the* "PACKING POINT"

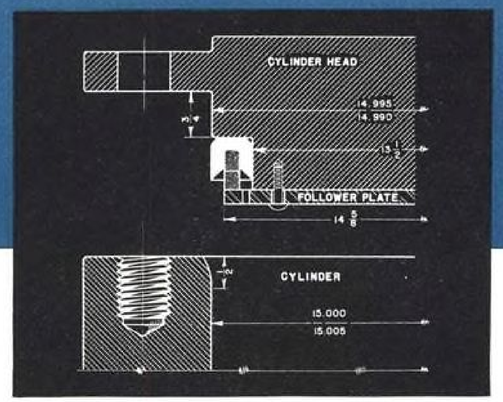


Case No. 1 Hydraulic Application — Static Seal

Equipment: hydraulic forging press cylinder head.

Operating conditions: 2000 p.s.i. oil. Absolutely no leakage allowed.

Equipment design: Cylinder head acts as backing plate . . . follower plate is drilled to permit medium free access to packing . . . filler in packing protrudes, with the result that it is squeezed by the follower enough to flare the packing slightly and insure tight fit (with a static seal, there is no friction problem) . . . deep smooth chamfer in cylinder insures easy assembly without damaging packing . . . cylinder head is long enough to enter the cylinder beyond the chamfer, giving the packing adequate support and preventing extrusion.

Packing: Graton & Knight Spartan Leather, especially impregnated for the purpose.

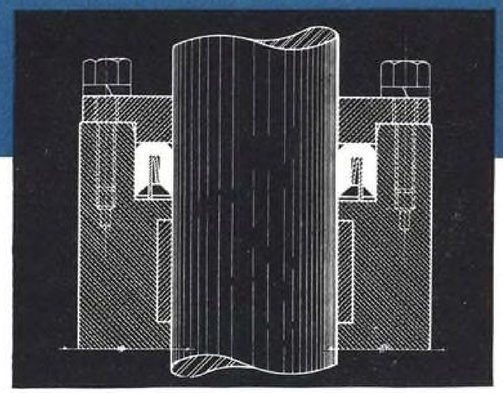

Case No. 2 Pneumatic Application

Equipment: double-acting air cylinder.

Application: piston rod packing recess or stuffing box.

Operating conditions: 90 to 125 p.s.i. air pressure . . . ordinary factory temperatures.

Equipment design: bolted follower plate, designed according to standard practices outlined on opposite page . . . finger-type expander keeps U in positive contact with the piston . . . also acts as throat ring.

Packing: Graton & Knight's Spartan Leather especially treated for resiliency to provide quick seal.

SPARTAN LEATHER PACKINGS AND A SERVICE THAT BUILDS CERTAINTY AT THE POINT OF SEAL

Graton & Knight's SPARTAN emphasizes the many advantages of leather as a packings material —

wearing quality . . . low coefficient of friction . . . flexibility at low temperatures . . . adaptability to wide range of mediums . . . economy

and adds the following qualities, which result from the exclusive Graton & Knight SPARTAN tannage —

the resistance to heat and oil of top-quality chrome leather . . . a mellowness and flexibility not found in the usual chrome tannage.

Spartan has highest resistance to heat (withstands boil test), and will not dry out hard and brittle. It is acknowledged the top-quality leather in the packings industry.

The combination of proper selection of sealing material plus correct application has made Graton & Knight engineers the No. 1 source of practical, time-saving aid for machine designers.

When your design reaches the "packing point" — or when a packing trouble arises — call on G&K engineers.





the hand that builds certainty at the point of seal

GRATON & KNIGHT COMPANY

WORCESTER 4, MASSACHUSETTS

GRATON AND KNIGHT

MAILING LISTS THAT WORK . . .

McGraw-Hill Industrial Mailing Lists are a direct route to today's purchase-controlling executives and technicians in practically every major industry.

These names are of particular value now when most manufacturers are experiencing constantly increasing difficulty in maintaining their own lists.


Probably no other organization is as well equipped as McGraw-Hill to solve the complicated problem of list maintenance during this period of unparalleled changes in industrial personnel. These lists are compiled from exclusive sources, based on hundreds of thousands of mail questionnaires and the reports of a nation-wide field staff, and are maintained on a twenty-four hour basis.

Investigate their tremendous possibilities in relation to your own product or service. Your specifications are our guide in recommending the particular McGraw-Hill lists that best cover your market. When planning your industrial advertising and sales promotional activities, ask for more facts or, better still, write today. No obligation, of course.



McGraw-Hill Publishing Co., Inc.
DIRECT MAIL DIVISION
330 West 42nd Street New York, 18, N. Y.

SUNNEN PRECISION HONING MACHINE for Jobs Like These—

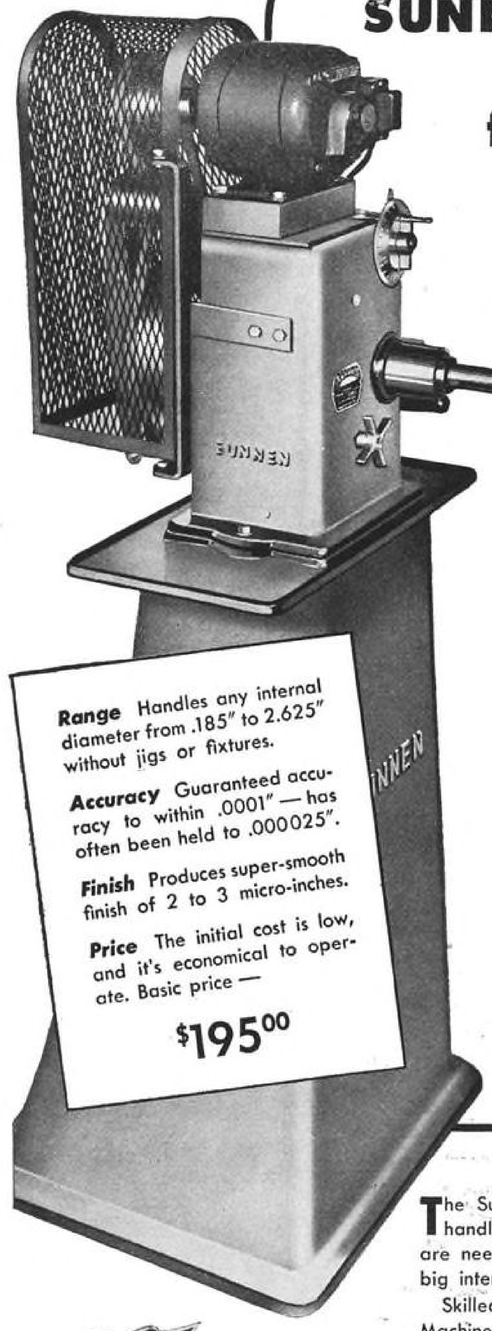

Range Handles any internal diameter from .185" to 2.625" without jigs or fixtures.

Accuracy Guaranteed accuracy to within .0001" — has often been held to .000025".

Finish Produces super-smooth finish of 2 to 3 micro-inches.

Price The initial cost is low, and it's economical to operate. Basic price —

$195.00



Compressor Yoke. Alignment maintained and better finish produced.

Aircraft Instrument Panel Control Wire Bushing. Hole .187" diameter—held to .0002", stock removal .001", sixty per hour.

Header Die. Life of header dies increased 3 to 9 times over lapping. Knock out pin breakage practically eliminated.

Shell Loading Die.

Aircraft Hydraulic Brake Cylinder. Honing 3 times faster than lapping — and gave a straighter hole.

Aircraft Piston Pin. Sunnen honing is twice as fast and gives a cleaner, better looking pin.

Cast Iron Valve Stem Guide. ½ to one thousandth removed—220 pieces per hour. Better finish and straighter hole.

Stainless Steel Load Compensator Valve Seat. Hole is honed to .0002" limit.

Aircraft Valve Tappet Roller. Honed after grinding to give 100% bearing surface.

Hydraulic Control Bushing. Honing gives straight round hole after rough reaming.

Aircraft Carbureter Operating Valve Sleeve. Sunnen honing eliminates distortion from assembling operation.

Automobile Distributor Shaft Gears. Taper removed at a rate of 80-90 per hour.

Carbureter Idler Valve Jet. Hole is honed after reaming for smooth action.

Roller Bearing Outer Race. Finish improved from 12 micro-inches to 2 micro-inches.

Bearing. A very small part. 2 micro-inch finish necessary.

SUNNEN



The coveted Army-Navy "E" waves over the Sunnen plant—evidence of the important part Sunnen equipment is playing in the war effort.


The Sunnen Precision Honing Machine has been found ideal for handling such parts as are illustrated above. No jigs or fixtures are needed, work is held in the hands. It often does the work of big internal grinders — relieves them for other jobs.

Skilled labor isn't necessary to operate the Precision Honing Machine. Girls in 'teens can handle jobs in "tenths" within a few hours.

The greater accuracy and super-smooth finish assures absolute interchangeability of parts. It also assures fewer rejects — conserving vital materials and boosting production.

Write for complete information — or let a Sunnen engineer show you, in your plant, on your parts, what this machine will do.

SUNNEN PRODUCTS COMPANY • 7942 Manchester Avenue, St. Louis, Missouri
Canadian Factory: Chatham, Ontario

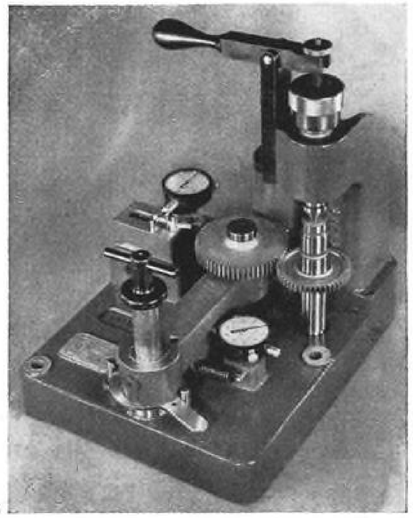

Almost everything that moves, uses

GEARS


Tanks rolling from invasion barges—jeeps dashing and bouncing up the beaches—planes covering the attack from above—more barges, filled with our warriors, speeding toward the shore —mounted guns blazing destruction to the enemy—these and many more of the Victory-producing products made in America for the United Nations, rely upon GEARS for the success of their motive power. Not just gears, but gears made as nearly perfect as human skill and precision machinery can produce. For the checking of production gears, VINCO has made, during the past quarter century, precision master gears and gear rolling fixtures. These examples of VINCO quality represent the ultimate in the art of precision manufacture.


Millionths of an inch for sale by

VINCO

HEAD OFFICE:
DETROIT, MICH.

NEW YORK, N.Y.
CHICAGO, ILL.

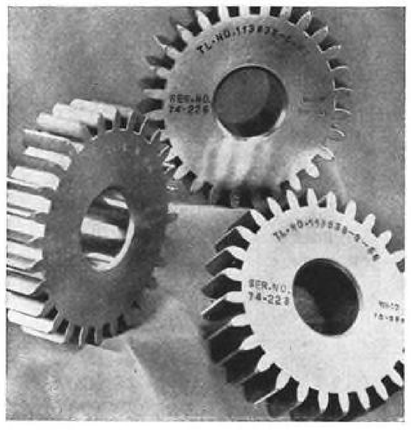

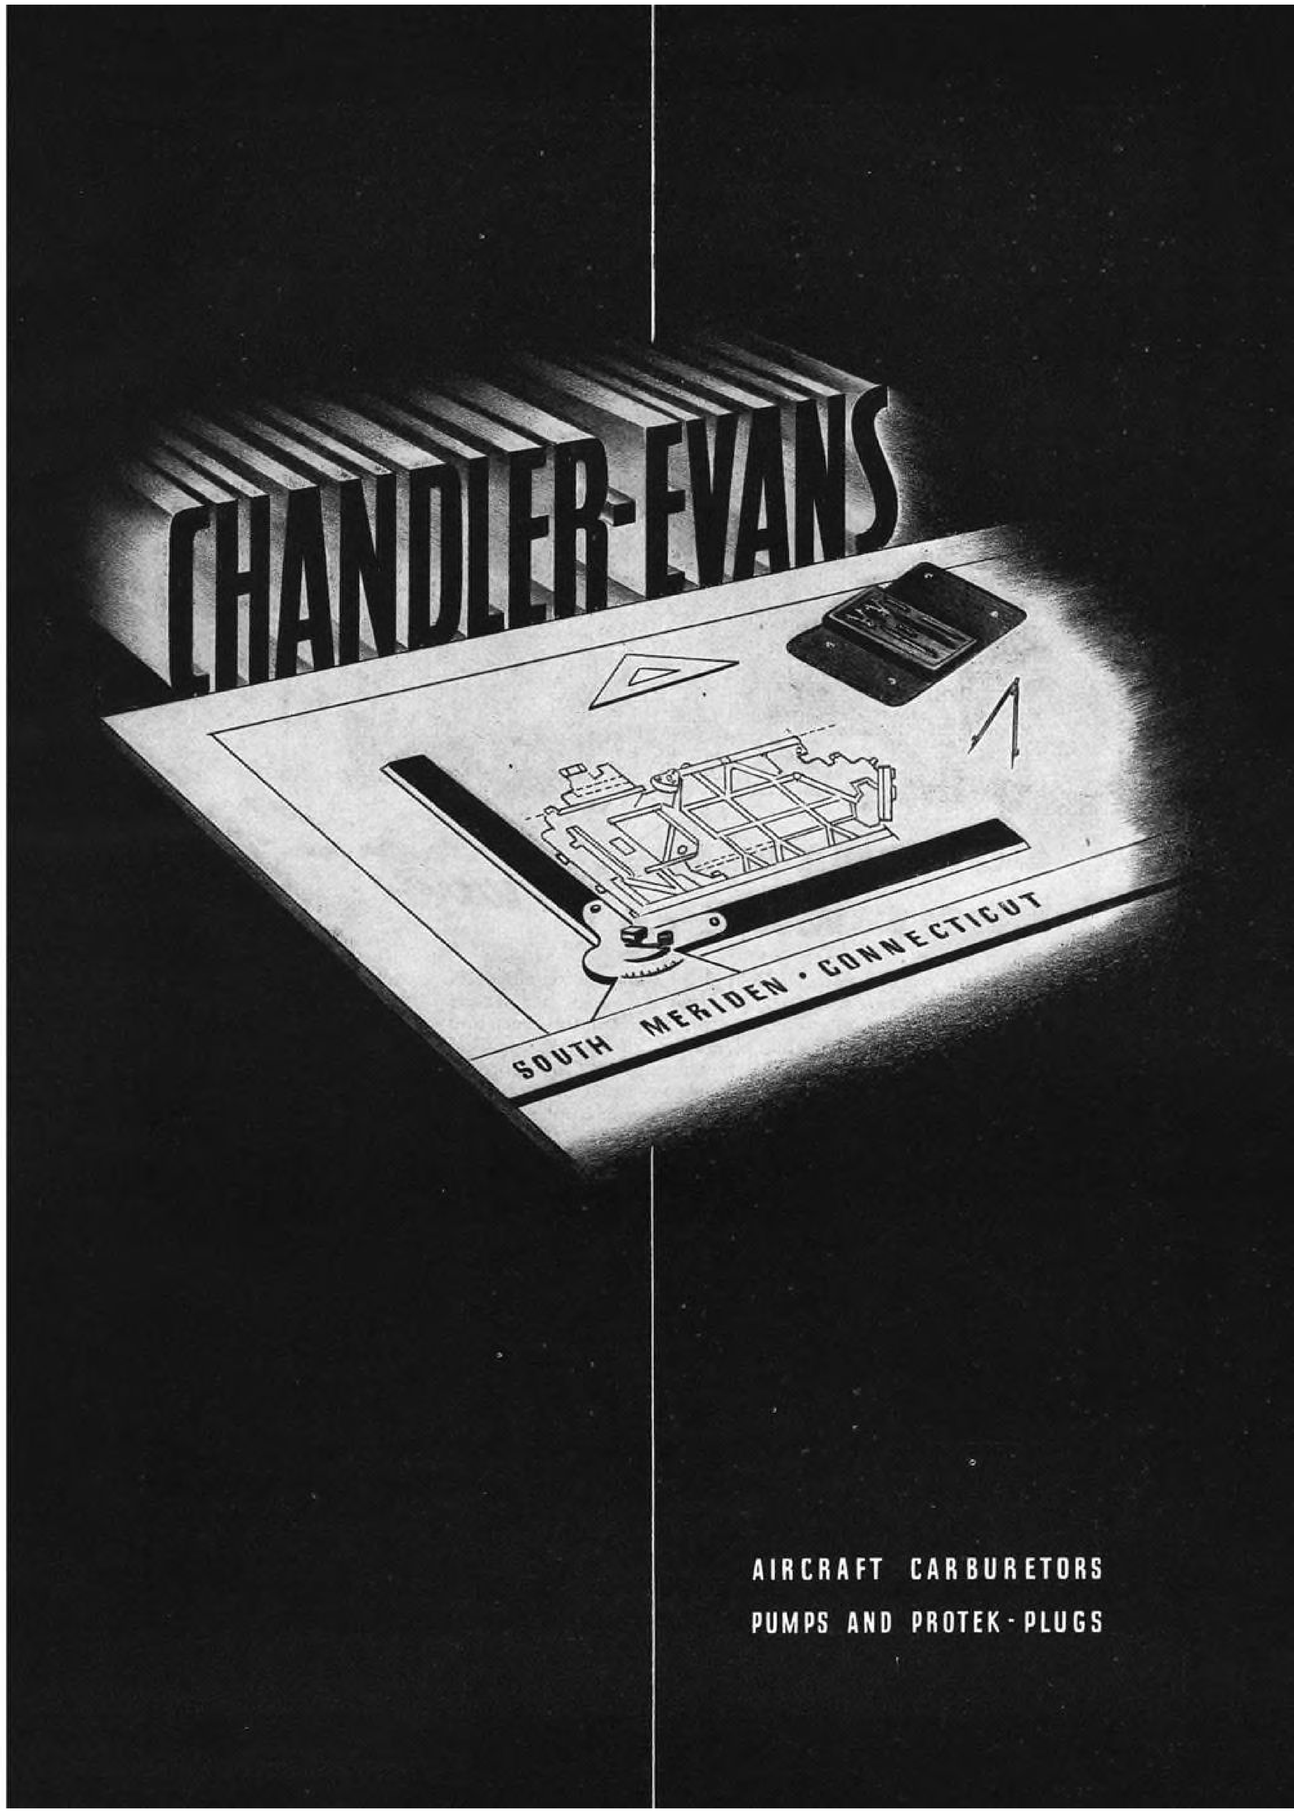



CONQUERING CONTINENTS ... with Steel

RETURNING pilots grinned at the map. The front line bulged around the area on which they had just laid their eggs—minutes ago.

In seconds they had ruined enemy troops and their weapons. Then — just as the last bomb-burst subsided, the motorized armor moved in, the position was occupied.

. . .

Touch-and-go coordination—split-second timing, unfailing teamwork of men and machines—is the modern design for conquest. Planes are groomed and tuned to the minute, fortified—in many vital parts that assure clock-like performance — by stainless steel.

Behind the construction engineers who build greater range, heavier fire power, trouble-free performance into our planes, are the U·S·S Stainless Steel technicians and metallurgists who provide the exact type of stainless for each required application.

They have developed stainless steels for exhaust systems and other engine and accessory parts exposed to extremely high temperatures; stainless steels that endure arctic fogs and tropical torrents, for superchargers, hinges, pins and other vital parts which must withstand severe corrosive conditions and impact shock without danger of fatigue failures. In countless applications many types of steel are helping our war-birds, even when desperately wounded, to flutter safely back to their home bases.

On land, at sea and on the home front, stainless steel, light and strong, tough and durable, is doing so many war jobs so well that its use seems destined to increase when its versatile qualities are again available for peacetime products.

You can use stainless now only to produce essential war materials. But you, of course, realize the need to know how it can help solve your post-war problems. Keep in touch with latest improvements and developments of U·S·S Stainless Steel by consulting our technical staff.

ONE AIM VICTORY! BUY BONDS

U·S·S STAINLESS STEEL

SHEETS · STRIP · PLATES · BARS · BILLETS · PIPE · TUBES · WIRE · SPECIAL SECTIONS

AMERICAN STEEL & WIRE COMPANY, *Cleveland, Chicago and New York*
CARNEGIE-ILLINOIS STEEL CORPORATION, *Pittsburgh and Chicago*
COLUMBIA STEEL COMPANY, *San Francisco*
NATIONAL TUBE COMPANY, *Pittsburgh*

United States Steel Supply Company, Chicago, *Warehouse Distributors* · United States Steel Export Company, New York

USS

UNITED STATES STEEL



"Goodness only knows where Eddie is by this time! But to him — and to the rest of the boys at the fighting fronts — we're saying it with production."

P&H HEVI-LIFT HOISTS

Thanks to "thru-the-air" handling with P&H Electric Hoists, production is moving faster, more efficiently than ever before; war workers are accomplishing more per shift.

There's no place in today's production for the drudgery that tires men and women long before the day's work is finished — not when these tasks can be done so much more quickly, without effort — by simply pressing buttons.

Whatever your materials handling problem may involve, your inquiry will receive immediate attention.

Available in all capacities up to 15 tons. Executives interested in information about the many ways P&H Electric Hoists can serve war industries should write us without delay.


ARMY E NAVY

General Offices: 4593 West National Avenue, Milwaukee, Wisconsin

HARNISCHFEGER CORPORATION

HOISTS · WELDING ELECTRODES · MOTORS · P&H · EXCAVATORS · ELECTRIC CRANES · ARC WELDERS

No SLOW DOWN ON CURVES with WALKER-TURNER FLEXIBLE SHAFTING

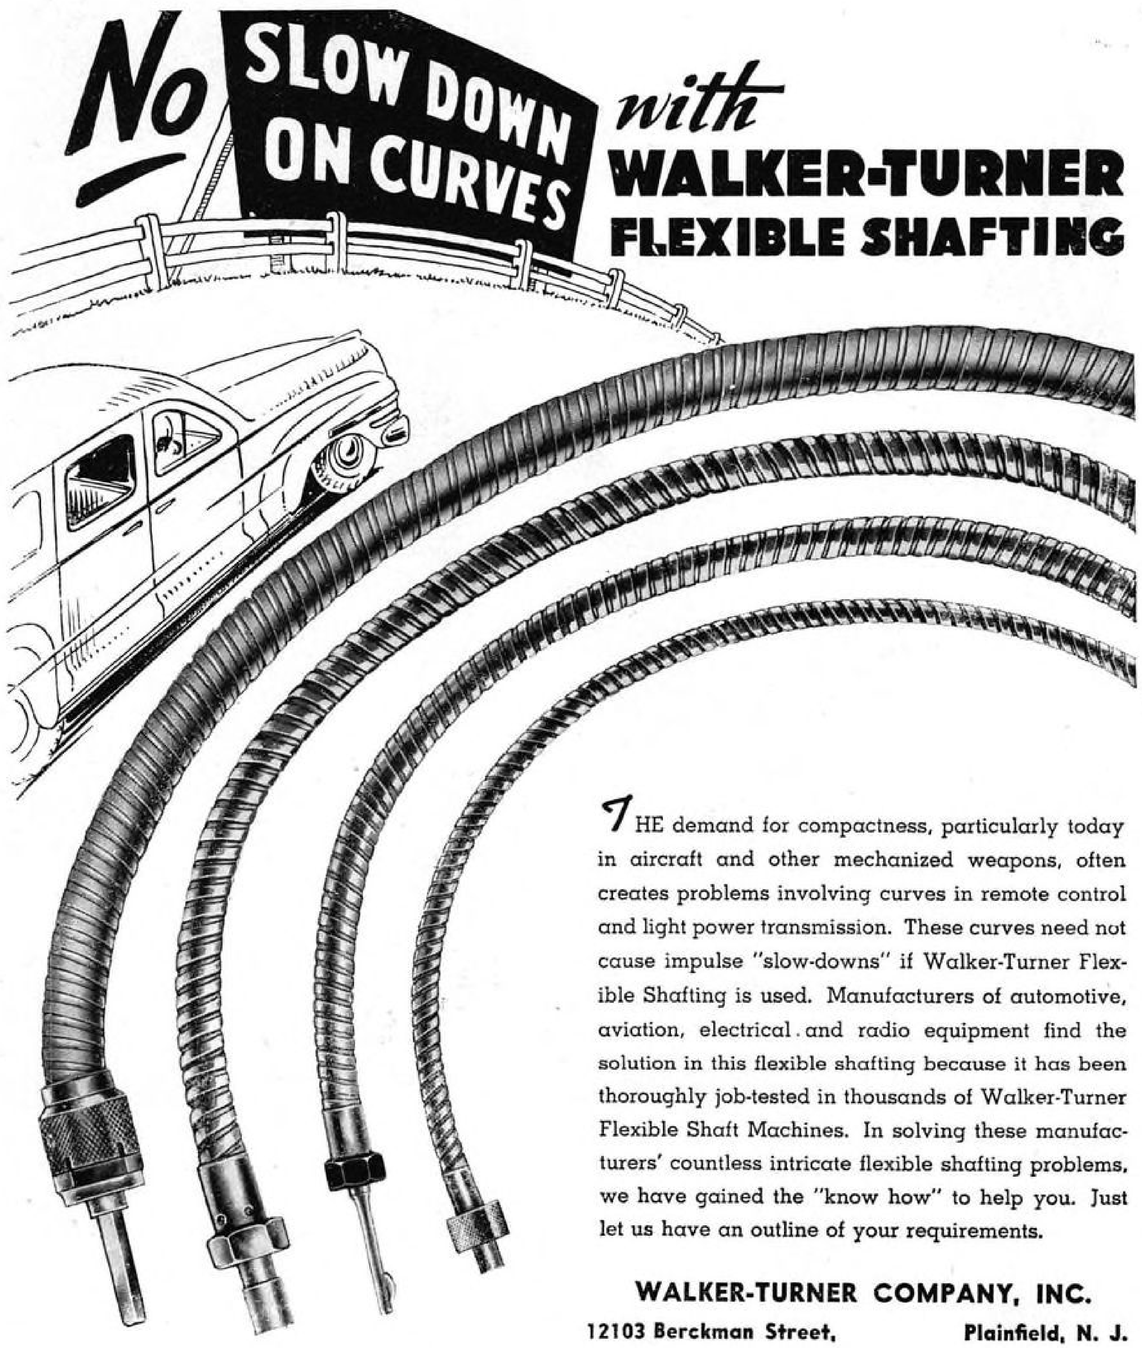

THE demand for compactness, particularly today in aircraft and other mechanized weapons, often creates problems involving curves in remote control and light power transmission. These curves need not cause impulse "slow-downs" if Walker-Turner Flexible Shafting is used. Manufacturers of automotive, aviation, electrical and radio equipment find the solution in this flexible shafting because it has been thoroughly job-tested in thousands of Walker-Turner Flexible Shaft Machines. In solving these manufacturers' countless intricate flexible shafting problems, we have gained the "know how" to help you. Just let us have an outline of your requirements.


WALKER-TURNER COMPANY, INC.

12103 Berckman Street, Plainfield, N. J.

walker-Turner COMPANY, INC. PLAINFIELD, N.J. U.S.A.

FLEXIBLE SHAFTING

FOR REMOTE CONTROL AND POWER TRANSMISSION

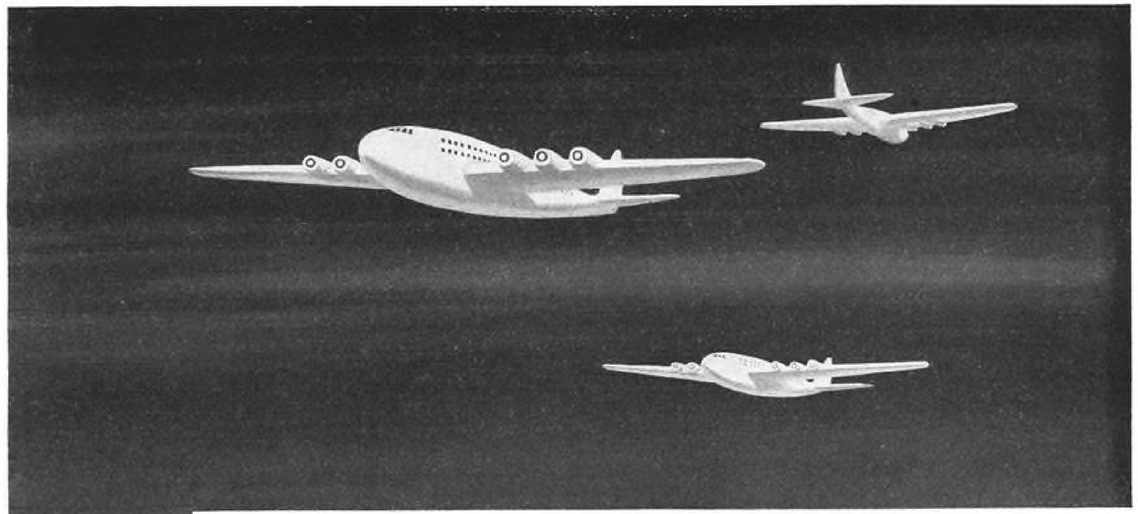

Crossroads of the world

When Lieut. Commander Richard E. Byrd made his memorable round-trip flight with Pilot Floyd Bennett from Spitsbergen to the North Pole in 1926, his trimotored Fokker plane carried a short-wave transmitter designed by Ralph M. Heintz, co-founder of Heintz and Kaufman, Ltd.

Two years later Sir George Hubert Wilkins flew a similar transmitter over the Pole while determining the feasibility of establishing weather stations in the Far North, and while proving the efficiency of planes at polar latitudes. Taking off from Pt. Barrow, Sir Hubert crossed the top of the world in a successful 2100-mile flight to Dead Man's Island.

The forecasts of these scientific pioneers are becoming a reality as Great Circle routes to distant countries lead our bombers and transports over Arctic regions. Today an air-minded generation speaks of the North Pole as "the crossroads of the world."

The polar flights of Byrd and Wilkins are part of the heritage of Heintz and Kaufman, Ltd., and are reflected in the many types of Gammatron tubes our engineers have designed especially for aviation transmitters.

In the Heintz and Kaufman plant and in our laboratories, Gammatrons are being ceaselessly perfected to safeguard planes and their crews as they soar over the top of the world.

HEINTZ AND KAUFMAN, LTD.

SOUTH SAN FRANCISCO · CALIFORNIA, U. S. A.

Gammatron Tubes



HK-257 — Highly popular Gammatron beam pentode of advanced design, made with tantalum elements. It has high voltage and power capabilities, needs no neutralization even at high frequencies, and requires very low driving power and screen current. Plate dissipation, 75 watts; power output, 225 watts.





WANTED: A device for measuring sacrifices!

What *is* a sacrifice?

There are even some who call it a sacrifice to buy bonds which pay back four dollars for every three invested. Others complain loudly when their pleasure driving is cut down.

Still others grumble when they are asked to save waste fats, tin cans, and paper.

What would these people say if they had to face the hardships, privations and sufferings endured by countless thousands of our boys on the far flung battle fronts of this global war? Being true Americans, they would probably have their eyes opened and would buckle down to the job.

We are all asked to make sacrifices these days. But the ones on the home front are so trifling by comparison with those made on the battlefields that it quickly becomes apparent they are hardly sacrifices at all.

The worried old gentleman affectionately known as "Uncle Sam" is, indeed, in need of our wholehearted support . . . genuine patriotism that becomes a device for measuring our true share of sacrifice and brings us ever closer to Victory.

APEX

THE APEX MACHINE & TOOL CO., DAYTON, OHIO



an aircraft • • •

FORGING



Resistance to shock in this tricycle landing gear forging

requires a precisely balanced combination of strength, toughness and flexibility in every ounce of the 60 pounds of steel of which it is forged. A combination of practical ideas with over 30 years of experience, and observation, gained from forging hundreds of shapes and sizes, invariably indicates the exact die design and forging technique, by which the IMPROVEMENT OF METALS BY FORGING may be obtained without wasteful experimentation.

DROP FORGINGS

THE STEEL IMPROVEMENT & FORGE CO.


960 East 64th Street CLEVELAND, OHIO



THERE'S scarcely a pilot in America who hasn't at one time or another flown behind a Sensenich Propeller. For Sensenich — world's largest maker of wood propellers — makes most of the props for most of the light and medium planes used in military training and private flying.

That's why you'll find a Sensenich Propeller on the nose of the Ryan PT-22. It's there because Sensenich knows how to design and build propellers for maximum efficiency and safety.

RIGHT ON THE NOSE OF THE RYAN PT-22



PROPELLER TIPS


Propellers should be kept in a horizontal position—whether in storage or on the ship. Keep in dry place, away from direct heat.

Check hub bolts for tightness every 50 hours as engine heat may cause hub shrinkage.


SENSENICH BROTHERS

Adjacent to Lancaster Municipal Airport, Lititz, Pa., West Coast Branch, Glendale, Calif.

First in the Field...
In More Ways Than One

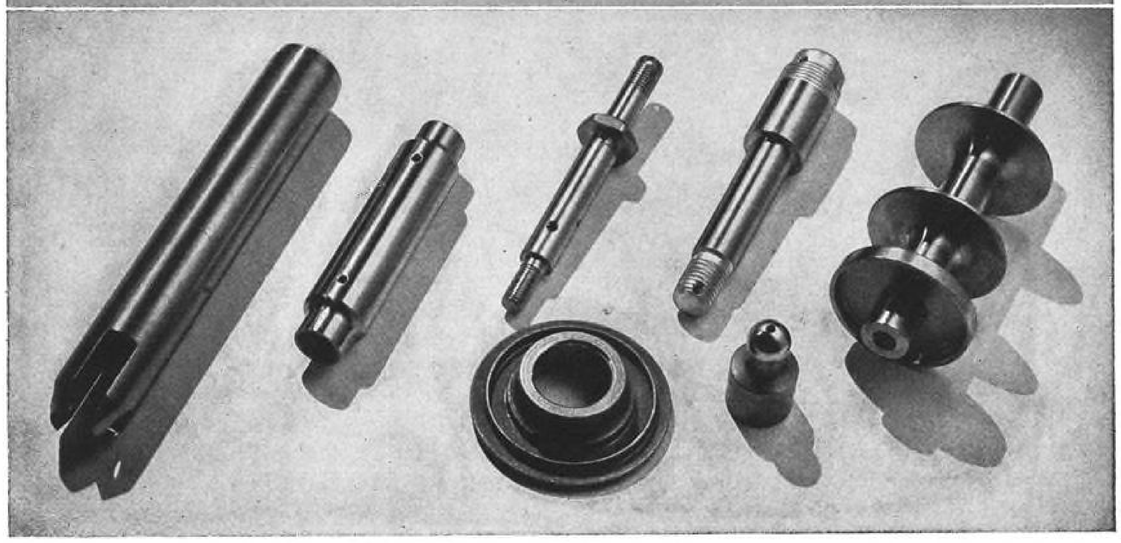


These aircraft engine parts, formed on automatic screw machines, require highly specialized progressive secondary equipment, and skilled workmanship. In *Hartford's* vast production are thousands of different precision parts that help make possible today's high-powered aircraft engines. • Established in 1876, *Hartford* manufactured the world's first automatic screw machines. Back in World War 1 *Hartford* made parts for Liberty engines. In 1925, when the drive started for precision in aircraft engine parts, *Hartford* pioneered parts for 410 H. P. engines. Today, we're making parts for the world's fastest 2,000 H.P. fighter engines. The ultimate in power and speed ... and so in greater precision ... is not even in sight • *Hartford's* background includes participation in every important development in screw machine product manufacturing and finishing ... From such a background flows the quality, precision, exactness and production uniformity so vital to war ... and post-war ... production • Facilities for additional production become available from time to time even now. And, when V-day comes, if you use parts that need the precision developed by *Hartford* for fighting engines, remember the first in the field. Hartford Machine Screw Company, Hartford, Connecticut.



★

HARTFORD

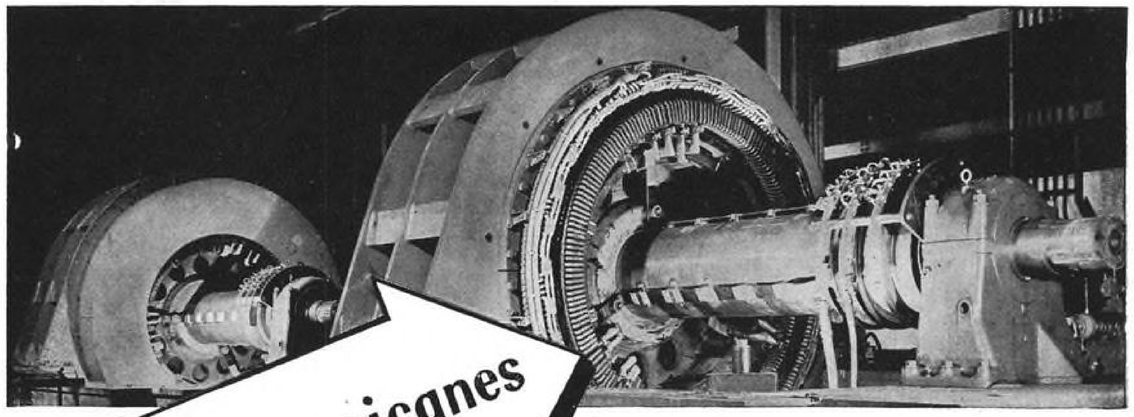

Where hurricanes

● *Six 6,000 h.p. SKF-equipped motors, built by Westinghouse, each to drive a 40-ft. propeller in the largest wind tunnel in the world, now under construction at the Ames Aeronautical Laboratory of the National Advisory Committee for Aeronautics at Moffett Field, California, for full-scale aerodynamic research.*

Imagine the loads imposed upon SKF Bearings as six 6,000 h.p. motors drive six giant propellers to provide the largest man-made windstream in the world in which scientific studies are to be made by the NACA to reduce the drag and increase still further the speed of America's airplanes. Radial loads run up to 70,000 lbs., thrust loads coming from the propeller up to 25,000 lbs. Bearings *must* be rugged to take such loads continuously . . . to help give our fighting planes more miles per hour than enemy planes can attain.


5414


SKF INDUSTRIES, INC., PHILA., PA.

rage on SKF

SKF

ROLLER BEARINGS

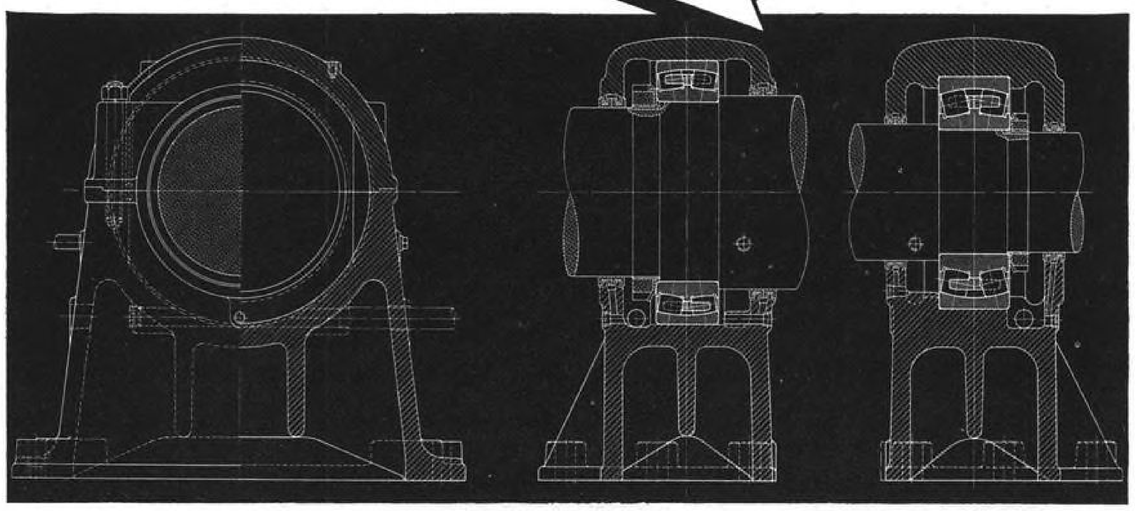

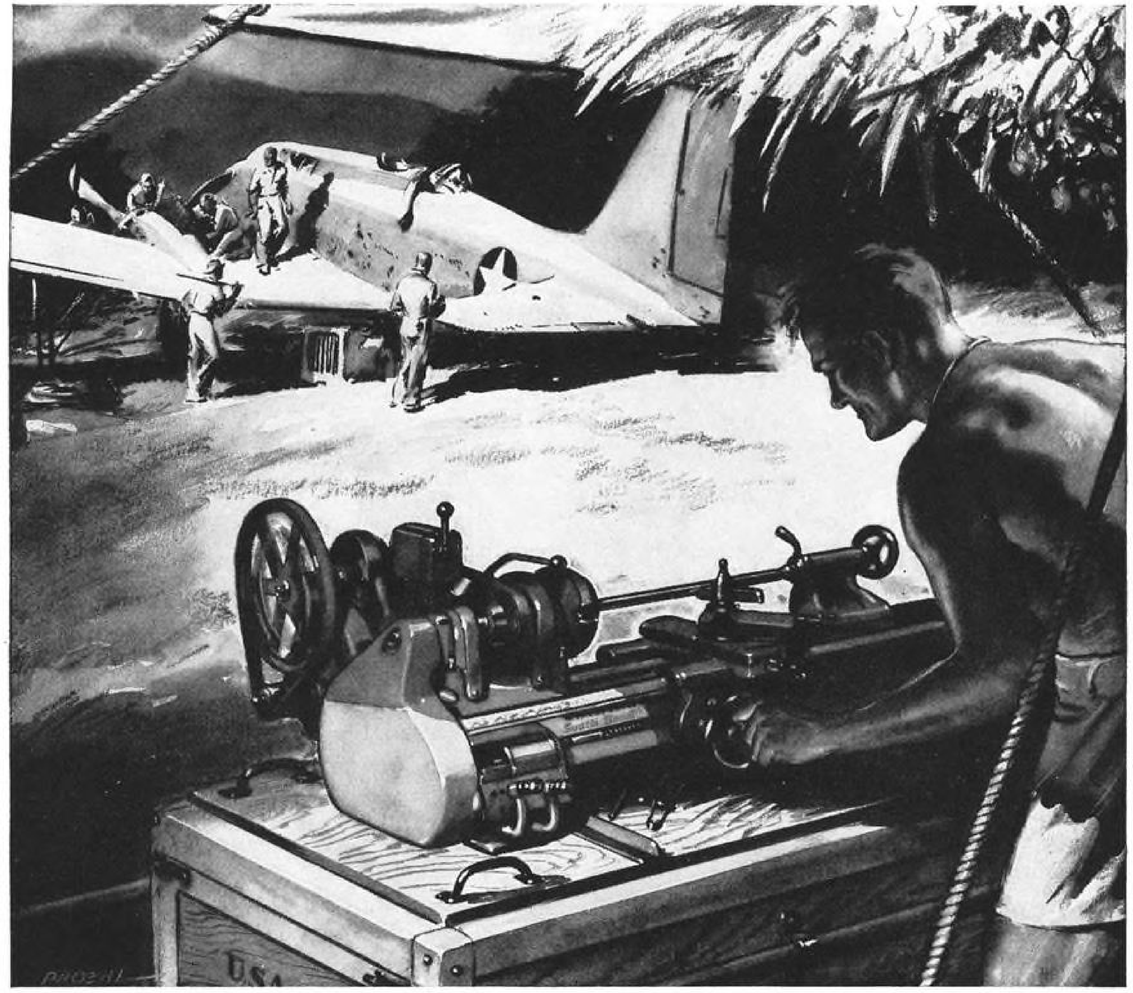

The Flying Lathes of the Air Corps

One of the toughest jobs of the Air Corps Technical Service is to get disabled planes back into the air when they have been forced down in remote locations. No matter where the plane is grounded, skilled technicians must get there quickly with all the tools and equipment required to make emergency repairs.

Buy War Bonds!


Precision machine operations are sometimes required—so the Air Corps is prepared to fly a Precision Lathe wherever a plane can land. Packed in special, lightweight cases and fitted with accessories for doing a variety of work that would surprise you, these flying lathes are an important part of the Air Corps' emergency service equipment.

We are proud that South Bend Lathes have been selected for this important service—one of many vital assignments that are keeping South Bend Lathes busy for the duration.

SOUTH BEND LATHE WORKS

SOUTH BEND 22, INDIANA — LATHE BUILDERS FOR 37 YEARS

WORTHINGTON
AIRFIELD
"GRASS BLITZER"

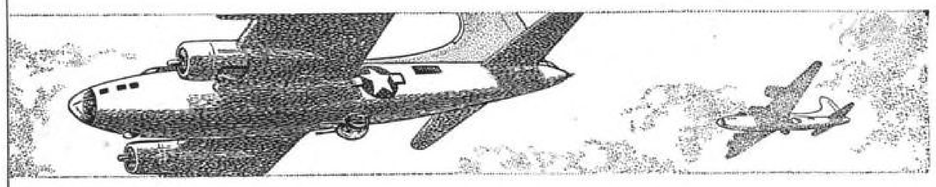

keeps today's huge airfields in "fighting trim"




Airfields, like fighters and bombers, must be kept in "fighting trim." The turf must be cut regularly — experts advise 10 to 15 times a season depending on the climate — to assure the best and safest take-off and landing conditions. And just as speed in flying fighters and bombers is all-important today . . . so is speed a vital necessity in mowing airfields.

Speed and efficiency . . . the reasons the Worthington Airfield "Grass Blitzer" is the only gang mower being purchased today for use on the airfields of the armed forces. Look at these figures . . . they speak for themselves:

OLD TYPE LAWN OR GOLF COURSE GANG MOWER: maximum acreage cut per 8-hour day — approximately 88 acres.

NEW WORTHINGTON "GRASS BLITZER": average acreage cut per 8-hour day — 300 acres . . . more than three times the cutting capacity of any other combination tractor and gang mower now available.

Backed by 30 years' experience in turf mowing and maintenance, the Worthington organization developed the "Grass Blitzer" to meet the demand for keeping today's huge airfields in condition . . . to "keep 'em flying." It is a revolutionary type of mower consisting of a high speed tractor pulling a 9-gang unit cutting a swath 21.1 feet wide.

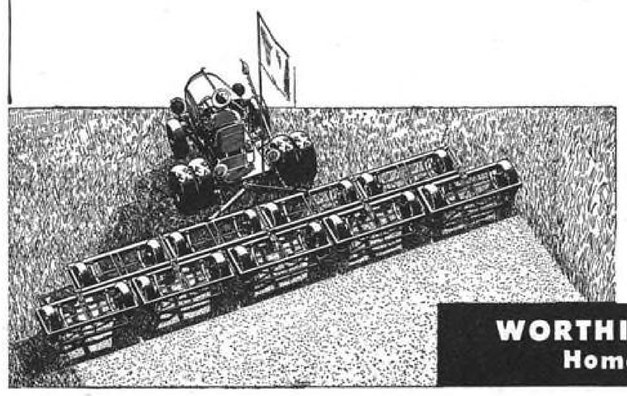



Since July 26th the Army-Navy "E" pennant has been flying over our plant . . . a tribute from the armed forces to our employees, to our suppliers and to our customers without whose wholehearted cooperation our full-out wartime production would not be possible.

WORTHINGTON MOWER COMPANY
Home Office: Stroudsburg, Pa.



WE NOMINATE FOR GLORY

Gentlemen, he's tired. This patient and venerable creature is the most overworked piece of machinery in the world. For countless centuries the old one-horsepower hay burner was the most efficient engine we had, and he has done much of this world's work.

Today, aeronautical engineers have packed a horsepower into a few ounces of metal, and more than 2,000 horsepower into a single engine. Tolerances are measured in thousandths of an inch, and bearing smoothness is measured in millionths.

There's a reason for such precision as this. Into the cylinders of that finished engine will pour a torrent of 15-ton explosions at the rate of hundreds of blasts every second during the million miles of flight that is the life expectancy of the engine.

And that, brother, is horsepower!

Today, Jones & Lamson machine tools, engineers and service men will be found on every airplane engine production line in America, helping to make possible this miracle of power . . . They are at your service. Call upon them now.

Universal Turret Lathes . Fay Automatic Lathes . Automatic Thread Grinders . Optical Comparators . Automatic Opening Threading Dies

JONES & LAMSON MACHINE CO., SPRINGFIELD, VERMONT, U.S.A.
Profit-producing Machine Tools




The world's finest piston rings for these world-famous aircraft engines—
Allison • Wright • Buick-built Pratt & Whitney
Packard-built Rolls-Royce • Franklin • Warner

The Perfect Circle Companies

Hagerstown, Indiana • Richmond, Indiana • Newcastle, Indiana • Tipton, Indiana • Toronto, Ontario, Canada



Perfect Circle has once again written
a new page in piston ring history.

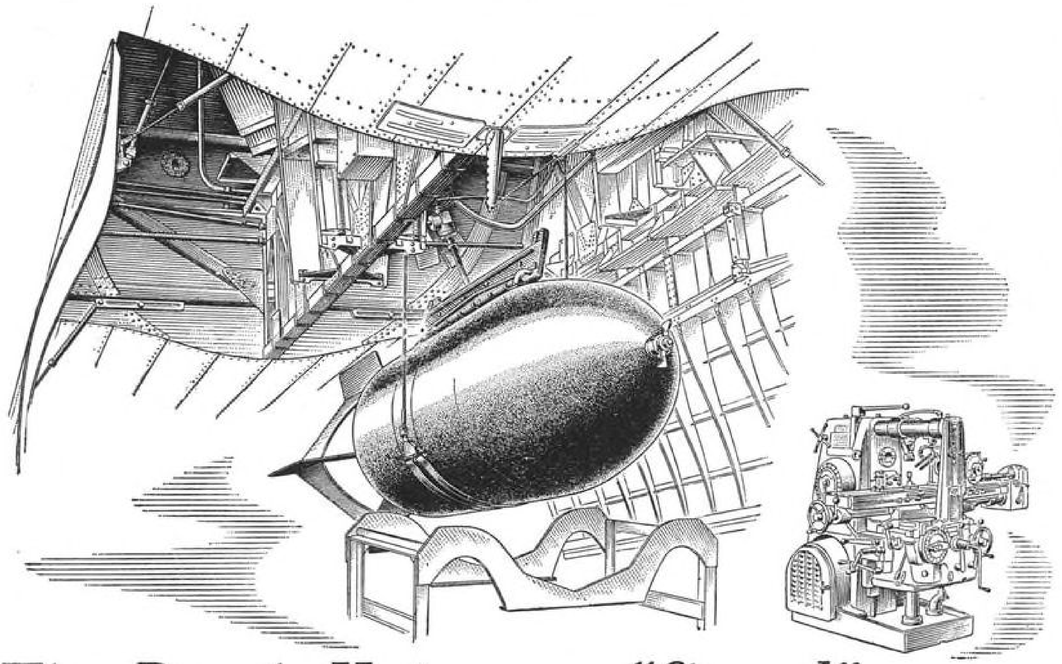

The Bomb Hoist was *"Struck"* by Something in the Milling Machine

IT MAY BE NEWS to some that a part so long at home in milling machines proved equally effective in bomb ammunition hoists. For the milling machine is a precision tool in which ease and speed of operation are vital. Noted for its anti-friction operation, the Torrington Needle Bearing is used in some of the most famous of these tools to meet just such milling machine "musts" on various hand and power-operated trip levers.

With the bomb ammunition hoist ease of operation is, of course, important, too. But of even greater concern in these days of mightier and mightier "blockbusters" is the danger of overloading. Where bomb hoists do their work, "spares" and often adequate repair facilities may be painfully conspicuous by their absence. That's why the Needle Bearing scored a "direct hit" with the designers of bomb hoists—its high unit capacity helps prevent overloading or breakdowns, and low coefficient gives it a "made-to-order" operating ease.

The pay-off, however, is that this unique anti-friction bearing had several *other* features which helped build a better bomb hoist—its compact size saves weight, increasing maneuverability...its effective system of lubrication means less servicing attention required...its long service life speaks for itself...while the ready availability of the Needle Bearing eliminated one of the most frequent obstacles in war production—delay in delivery.

ISN'T THIS SOMETHING TO THINK ABOUT in planning your postwar designs? Not alone because of the Needle Bearing's adaptability to a wide variety of products for entirely different reasons, but also because its unique combination of advantages represent the very features customers will be looking for Tomorrow in the things for peacetime living—light weight, compactness, ease of operation, freedom from maintenance and long life. Torrington engineers are ready to point out how you can give your product these same advantages with the Needle Bearing. For preliminary information on sizes, types and ratings, together with a list of typical applications, send today for Catalog No. 114.

NEEDLE BEARINGS—ALL TYPES—ALL SIZES

NEEDLE BEARINGS TYPE DC are complete, self-contained units consisting of a full complement of rollers and a drawn, hardened outer race. They offer the advantages of small size, low cost, high capacity—and easy installation.





NEEDLE BEARINGS TYPE NCS consist of a full complement of rollers and a relatively heavy hardened outer race. They are furnished with or without inner races. Needle Bearings Type NCS are adaptable to heavier loads than Needle Bearings Type DC.

NEEDLE ROLLERS TYPE LN are produced in a range of types and sizes for assembly on the job into low-cost, high-capacity, anti-friction bearing units. Our engineering department will be glad to advise on the correct size and type for any application.



THE TORRINGTON COMPANY

Established 1866 • Torrington, Conn. • South Bend 21, Ind.

Makers of Needle Bearings and Needle Bearing Rollers

New York · Boston · Philadelphia · Detroit · Cleveland · Seattle · San Francisco · Chicago · Los Angeles · Toronto · London, England

LET'S GO U.S.A. KEEP 'EM FLYING!

TORRINGTON NEEDLE BEARINGS



...give gasoline service on the double!

Proven overseas where they have been serving with our armed forces, Fletcher Jeep Tanks are now available for domestic service . . . to lighten history's biggest load on airport fuelling facilities.

These highly maneuverable, lightweight plywood tanks remove the burden from your regular trucks and storage tanks and get your gasoline to and from the plane on the double! Fletcher Jeep Tanks can be used to store gasoline or other liquids indefinitely . . . or, hooked behind anything from a jeep to a six-wheeler, singly or in trains, they can be towed to any location at top speed. And it takes only one man to handle the job.


Let your big trucks do the heavy highway hauling. Have Fletcher Jeep Tanks on the spot to do your airport service work quickly and at low cost.

Two sizes are available now . . . 220 gallon capacity and 600 gallon capacity. Deliveries can be made to essential industries immediately. Write for details.

FLETCHER AVIATION CORP.

PASADENA • CALIFORNIA

Hundreds of these tanks are used by the AAF for advanced base refuelling. The all-plywood tank is instantly demounted from the chassis

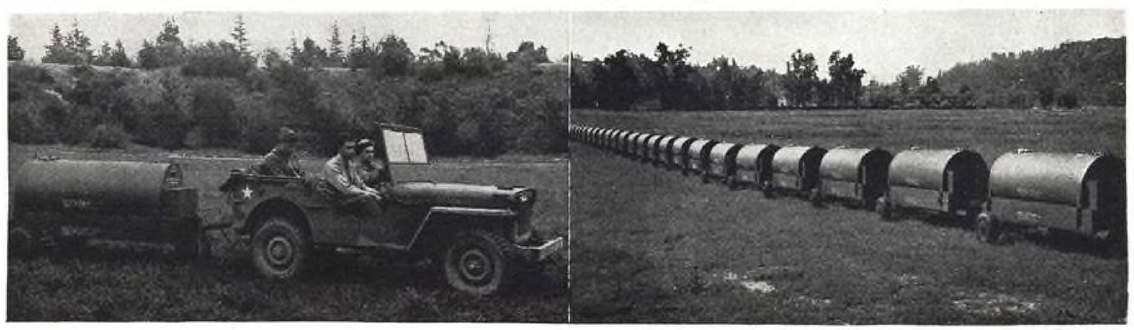



©1943, The Studebaker Corporation

"You purr just like those engines Dad builds!"

They're Studebaker-built Wright Cyclones for the famous Boeing Flying Fortress

SOLDIER HARRY RYAN and his father were fellow craftsmen in the Studebaker factory prior to Pearl Harbor. They comprised one of the many father-and-son teams that have been a unique Studebaker institution since 1852.

Large numbers of the younger men, who once were Studebaker craftsmen, are now using instead of building military equipment. In many instances, their fathers, and other older members of their families, are producing Flying Fortress engines, multiple-drive military trucks and other war matériel in the busy Studebaker plants.

For generations, a tradition of Studebaker employment has existed in Studebaker's home community. This has resulted in a quality of craftsmanship unmatched in the automotive world.

This craftsmanship is now being utilized to the limit, on behalf of our Nation and its Allies. It will provide finer Studebaker motor cars and motor trucks than ever before for civilian use, after Victory comes.

BUY U.S. WAR BONDS

STUDEBAKER

Builder of Wright Cyclone engines for the Boeing Flying Fortress, big multiple-drive military trucks and other vital war matériel




"Always give more than you promise"

That Studebaker watchword has been observed for 20 years by craftsman Henry C. Ryan. He is helping to build Cyclone engines for the Flying Fortress in one of Studebaker's aircraft engine plants. Some day, he and his soldier son, Harry, hope to build Studebaker cars again for you.

After 5000 makes and breaks

RELATIVE WIRE CONDUCTIVITY is still 110%!

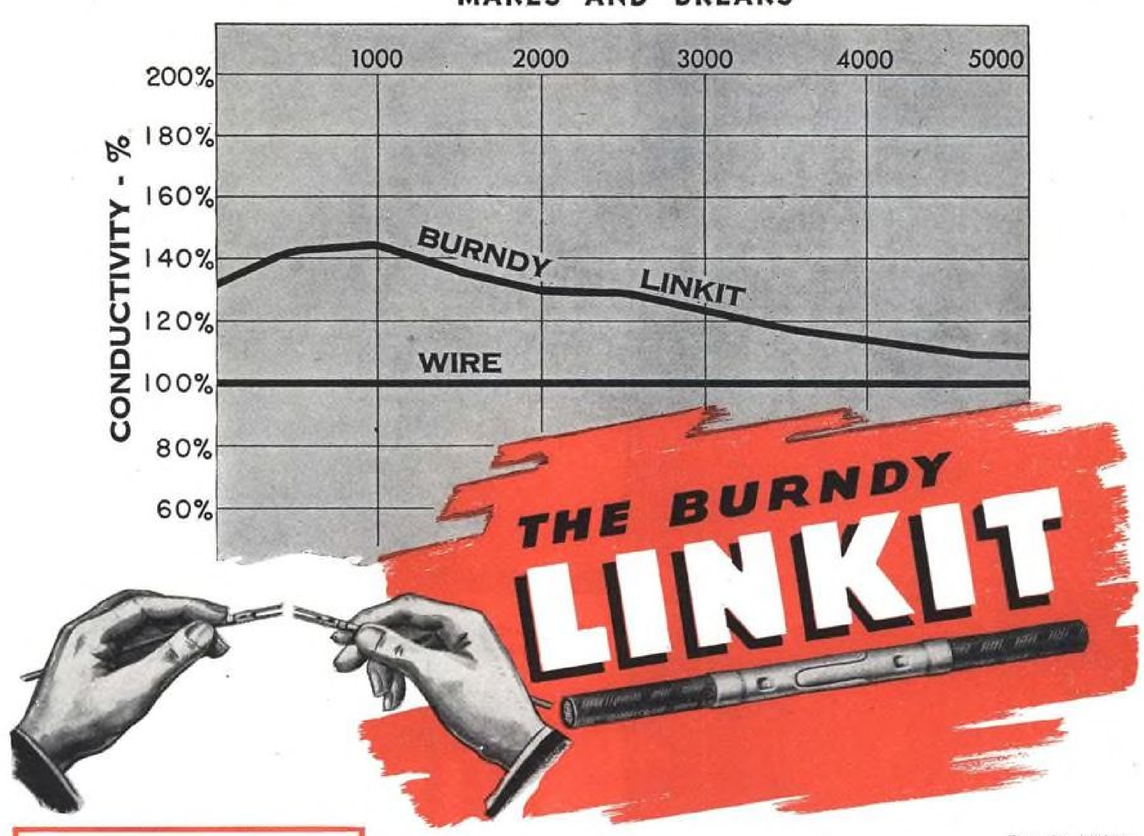



Patent No. 2,102,837

THE DETACHABLE CONNECTOR WITH NO LOOSE PARTS!

This is the test that wins *instant approval* for the Burndy LINKIT! For even 100 makes and breaks would be *extreme service* for a small wire connection. Yet the LINKIT withstands *thousands,* with little effect on conductivity . . . proof of the *enduring strength* and *wearability* of its four *long* contact surfaces.

Remember, too, that each half of the LINKIT is identical . . . and there are no extra parts to loosen or lose. The halves are quickly and securely indented to the wires with Burndy HYTOOLS in the usual way. LINKITS and LINKIT lugs are available for all wire sizes from #22 up. Literature gladly sent on request.

BURNDY ENGINEERING CO., INC., 107 Eastern Blvd., New York 54, N.Y.

BURNDY *Headquarters for Connectors*

To
Aircraft and
Engine Builders
Everywhere...

ANNOUNCING

. . . a program to help you use


FASTENERS

(Bolts, Nuts, Rivets, Screws)


More Efficiently

More Economically

More Effectively

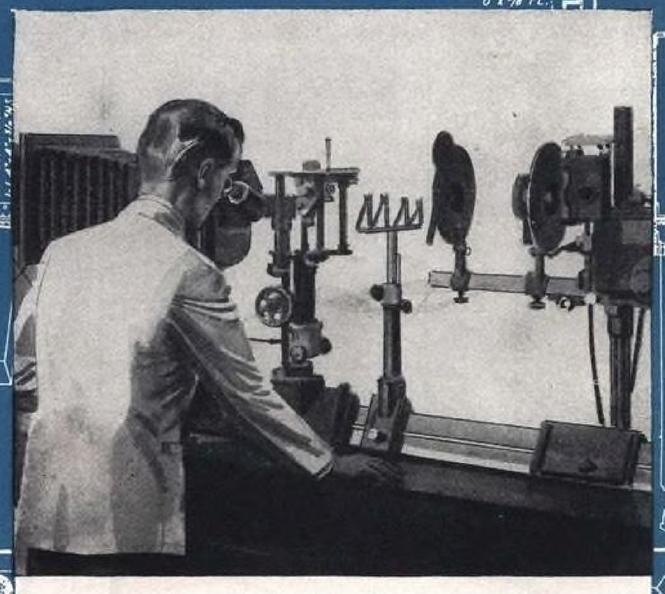

Metallurgical studies form an important part of the investigations of the behavior of fasteners under various service conditions.

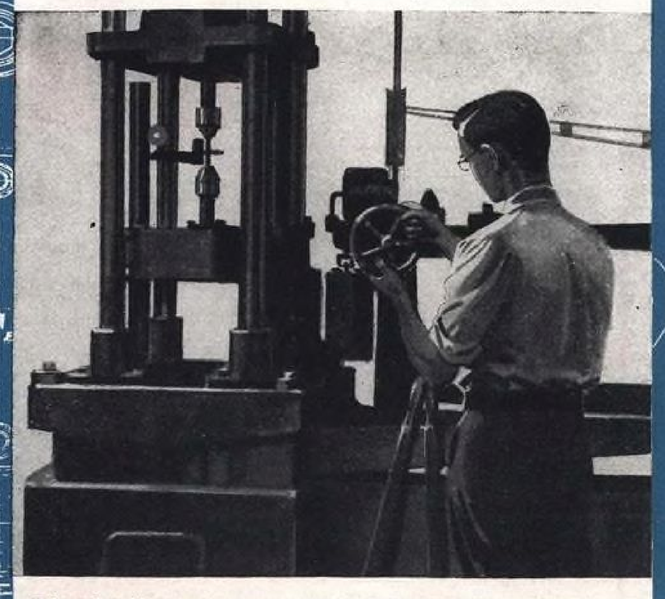

A broad and thorough program of technical exploration, sponsored by the Institute, employs the facilities of outstanding technological laboratories.

Sponsored by the American Institute of Bolt, Nut and Rivet Manufacturers



The basic dependability of Fasteners has led to their use wherever reliable connections are needed. Keeping abreast of engineering developments, makers of these products have constantly improved and refined the various items in their lines, making use of advanced metallurgical and precision manufacturing processes. As a result, higher strengths, closer tolerances, better finishes, etc. are available to engineers and manufacturers using bolts, nuts, rivets and screws.

To acquaint you with these advances, and to help you make fullest use of the products of the Fasteners industry, the Institute is sponsoring an informative campaign. New engineering data, application information and product developments will be spotlighted in this activity.

FACTUAL DATA BULLETIN


One of the primary features of this activity will be a bulletin "FASTENERS" to be issued at regular intervals. It will contain authoritative and useful data and ideas that will help you make best use of fasteners. We will be glad to send it to you regularly at no cost if you are interested in learning more about the ever widening applications and possibilities of bolts, nuts, rivets, screws, and other headed and threaded products.



American Institute of Bolt, Nut and Rivet Manufacturers

1550 Hanna Building · Cleveland 15, Ohio



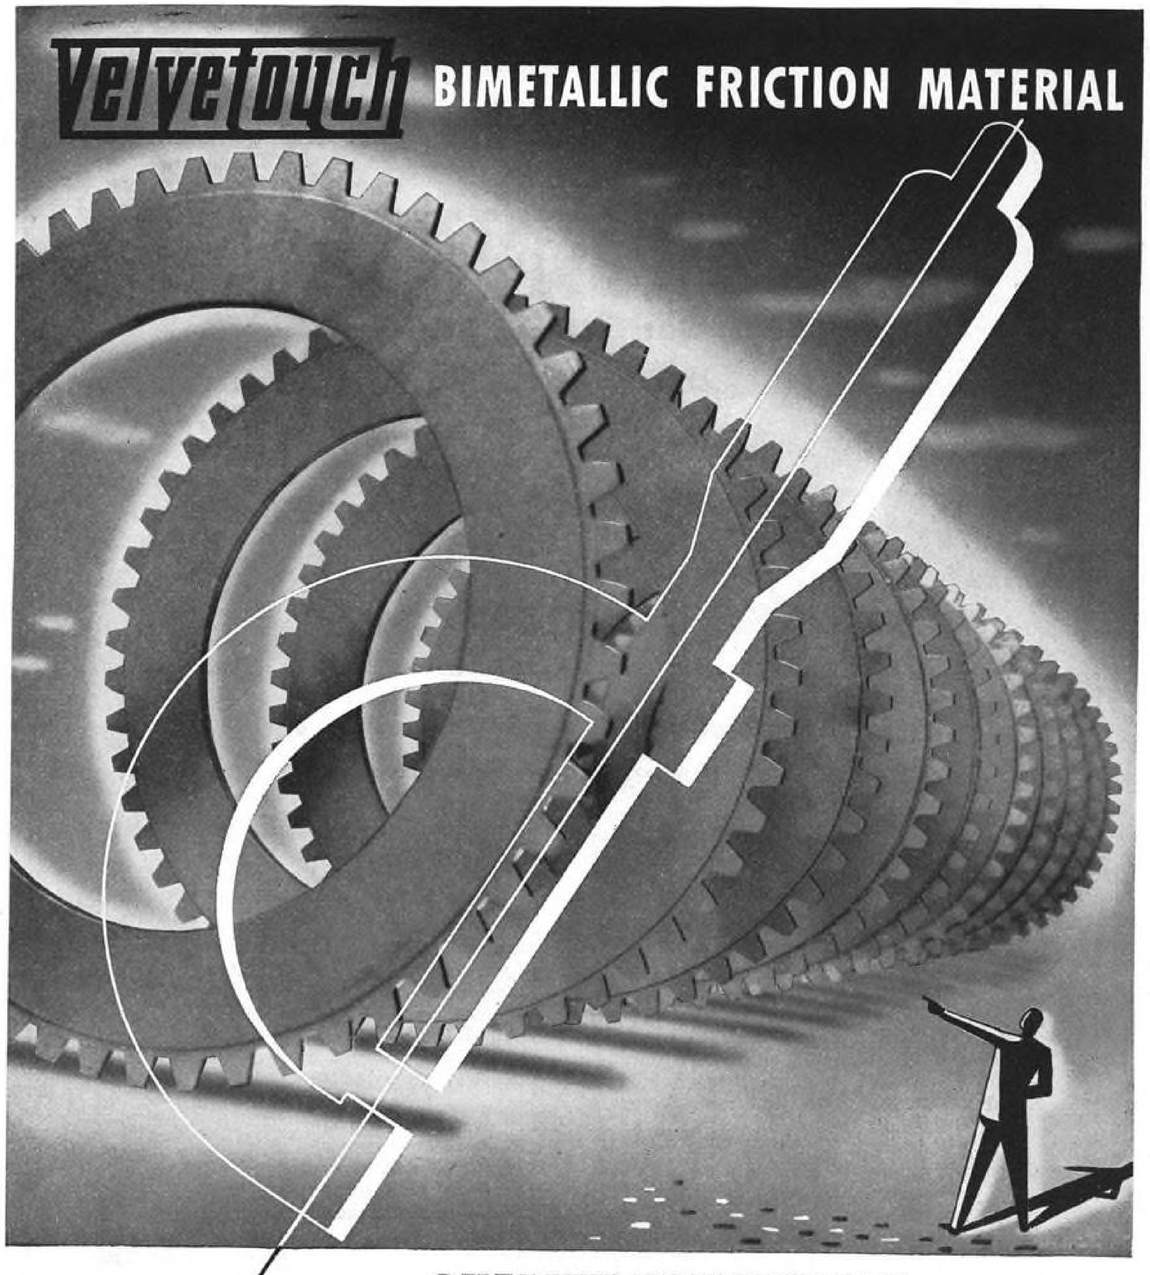

QUALITY CONTROLLED to insure greater uniformity in the performance of clutches and brakes.

THE S. K. WELLMAN CO.
1374 East 51st St., Cleveland, Ohio
Pioneers in putting Powder Metallurgy to work for Industry . . . . . .

CUSTOMARILY WE SPEND HOURS ON LAYOUTS, ARTWORK, COPY, ETC., TO GET A REAL "FANCY" AD FOR YOU

BUT !

THIS MONTH WE WERE TOO BUSY ENGINEERING THIS NEW

PERSONS Aircraft Solenoid

50 lb. Push or pull at 13 amps–
24 volts with a stroke of ½"
Weighs only 2¼ lbs.
(A.N. SPECIFICATIONS)

NO DOUBT YOU HAVE NEED FOR A SOLENOID LIKE THIS (OR ANOTHER)
MAIL COUPON AND BY THAT TIME WE'LL HAVE COMPLETE DESCRIPTIVE LITERATURE READY.

L. M. PERSONS Corporation
6301 MANCHESTER AVE. ST. LOUIS, (10), MO. STERLING 1100

L. M. PERSONS CORP., 6301 Manchester Ave., St. Louis 10, MO.

GENTLEMEN: Send complete descriptive literature on Persons Aircraft Solenoid described above. Also your Solenoids for

NAME _____ COMPANY _____
ADDRESS _____
CITY _____ STATE _____

HERE it is, ready for you. Twenty pages of tool-saving, time-saving, tool-crib arrangements used in many of the nation's busiest plants — who have problems like yours.

Faced with a shortage of small tools, many plant managers have found that careful tool crib planning means more effective use of the tools they have. This book shows how they do it. This is not a book of theory — every photograph in it shows how a real plant has made a real saving. "Greenfield" wants you to have a copy, as part of our contribution to the united effort. Send your reservation today . . . use the coupon below.

YOU WON'T FILE THIS BOOK!

. . . You'll use it

It's FREE
SEND THE COUPON . . . TODAY



GREENFIELD TAP AND DIE CORPORATION
GREENFIELD, MASSACHUSETTS
DETROIT PLANT: 5850 Second Boulevard
WAREHOUSES in New York, Chicago and Los Angeles
In Canada:


GTD GREENFIELD
TAPS · · · · · DIES · · · · · GAGES · · · · · TWIST DRILLS · · · · · SCREW PLATES

Coupon:

Greenfield Tap And Die Corp.
Greenfield, Mass.

Gentlemen: Kindly send me a copy of your 20-page booklet "Tool Conservation Begins in the Tool Crib."

Name .....
Firm .....
Address .....
City ..... State .....

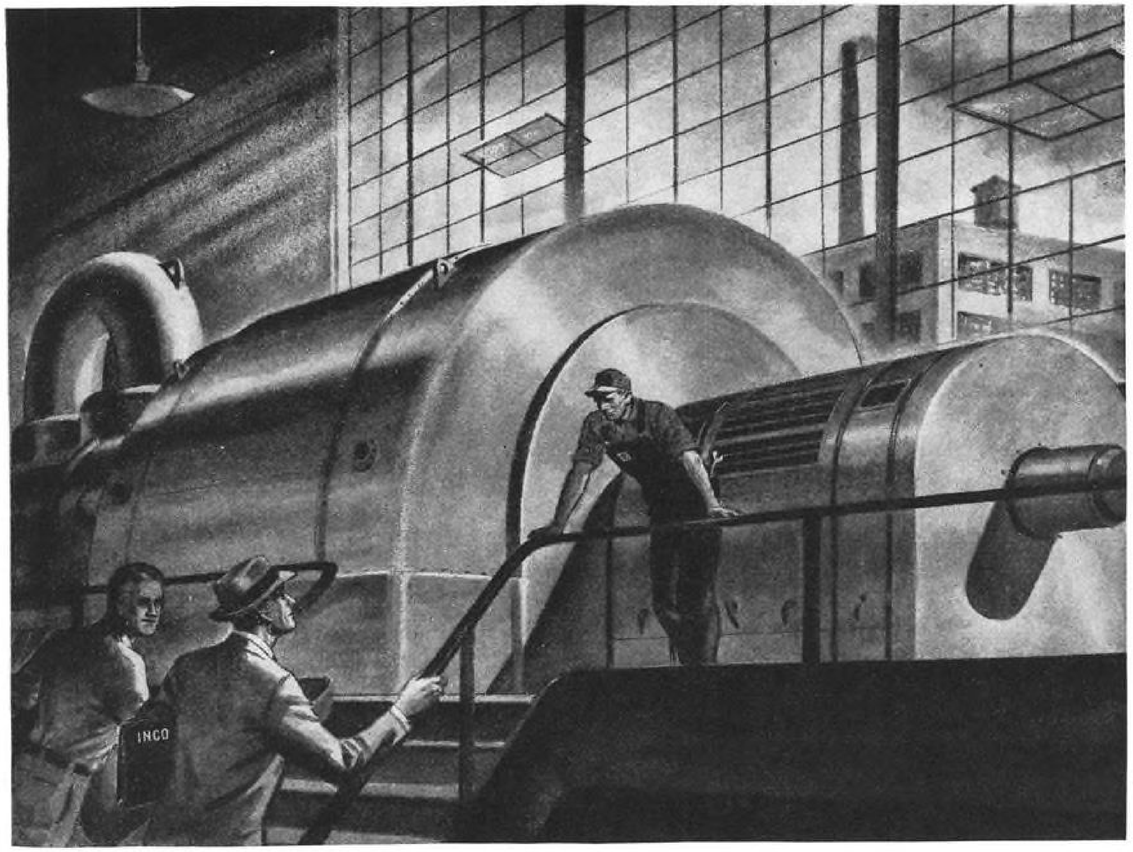

NICKEL AIDS THE POWER INDUSTRY

to KEEP 'EM OPERATING!

In this day of acute shortages of almost everything, power plant engineers are doing an amazing job of meeting demands for power—the power to keep 'em operating.

Part of this success is due to their foresight in specifying materials that assure long life and withstand the added hardships imposed by ever-increasing peak-load demands.

With the production of tanks, guns, and planes dependent upon power capacity, Nickel makes a valuable contribution towards uninterrupted operation, through the improved properties it imparts to ferrous and non-ferrous alloys used in power plant equipment.

So today the exigencies of war illustrate more clearly than ever the simple truth of the familiar axiom, "A little Nickel goes a long way" toward increasing the dependability of power plant equipment, from turbine blades to high pressure valves, from flange bolts to shaft forgings.

The technical staff of International Nickel has been privileged to cooperate with the power plant engineers and Government authorities who have made possible the great increases in power on which so much of the war effort depends. INCO engineers and metallurgists offer counsel and data to all who desire assistance in the selection, fabrication, and heat treatment of ferrous and non-ferrous metals.

New Catalog Index

New Catalog C makes it easy for you to get Nickel literature. It gives you capsule synopses of booklets and bulletins on a wide variety of subjects — from industrial applications to metallurgical data and working instructions. Why not send for your copy of Catalog C today?



* Nickel *

THE INTERNATIONAL NICKEL COMPANY, INC., *67 Wall St., New York 5, N. Y.*

...then perhaps he said to himself

A TEN-MONTH DELIVERY





MR. ROOSEVELT'S LETTER

President Roosevelt's letter to Mr. Churchill read as follows:

Dear Mr. Prime Minister:

When you were with us during the latter part of December, 1941, and the first few days of 1942, after we had become active participants in the war, plans for a division of responsibility between your country and mine became generally fixed ... standing ...

... well as in other matters, we agreed that mutual advantages were to be gained by concentrating, in so far as it was practical, our energies in doing those things which each of us was best qualified to do.

Here in this country in abundance were the natural resources ... critical materials.

Here we had waiting cargoes ... be moved in ships to your ... and to other theatres. If ... country was to have ... out its contemplated ship ... duction program it would ... been necessary to move ... tonnages of raw materials ... e have here across the Atlantic to your mills and ... and then, in form of f ... ships, to send them back ... ports for the cargo th ... waiting to be carried.

Materials and Time

Obviously, this would ... tailed a waste of matd ... time.

It was only natural m ... to decide that this cas ... be the predominantip ... area for us ile ... ry was t its ... resourci- ... nstruom- ... coduced ... higram ... more ... ds in ... e orably ... le ne the ... dipbuthe two ... we hand are ... to last ton- ... age of cargo ... Our merchas become ... larger and wil to grow ... at a rapid man its ... ever-increasier of ves- ... sels we forcent difficul- ... ties of no martions. On ... your side th merchant ... fleet, has bnished and ... you have iol as a con- ... sequence seamen and ... licensed p ...

Clearly be extravagant werdy of experienced mesea not to be used as pas possible. To fail to would result in a wastapower on your side anis of equal importancage of shipping facilitimnot afford this.

15 to 20 Ships a Month

In order that the general understanding we reached, during the early days of our engagement together in this war, may be more perfectly carried out, and in order as a practical matter to avoid the prodigal use of manpower and shipping that would result from pursuing any other course, I am directing the War Shipping Administration, under appropriate bareboat arrangements, to number to your flag for temporary wartime duty during each of the suggested next ten months a minimum of fifteen ships.

I have furthermore suggested to them that this be increased to twenty.

We have been allocating to British services on a voyage-to-voyage basis large numbers of American-controlled ships. What I am now suggesting to you, and what I am directing the War Shipping Administration to carry out, will be in the nature of a substitution to the extent of tonnage transferred for the American tonnage that has usually been employed in your war program.

Details of the arrangements we can properly leave to national shipping authorities for settlement through the Combined Shipping Adjustment Board, whose function it is to concert employment of all merchant vessels, and will in accordance with its usual practice do so in connection with these particular ships.

Always sincerely,

FRANKLIN D. ROOSEVELT.

Here there had been developed a welding technique which enables us to construct standard merchant ships with a speed unequaled in the history of merchant shipping.

BIG PIECE OF NEWS the Prime Minister read to the House of Commons—the 10-months' delivery of a couple hundred ships.

Again the old formula: BIG name in the NEWS . . . made big by Big Production . . production made big by RECOURSE TO ARC WELDING (remembering Webster's short definition of RECOURSE as "a going to for aid or protection").


So the President has written the formula into the history of the world: "Here there had been developed a welding technique . . . with speed unequaled."

THE LINCOLN ELECTRIC COMPANY • *CLEVELAND 1, OHIO*

"A Welding Technique" *he said*

* * * * *"with speed unequalled in the history of merchant shipping"*

...and this, Mr. Prime Minister, is what he meant:

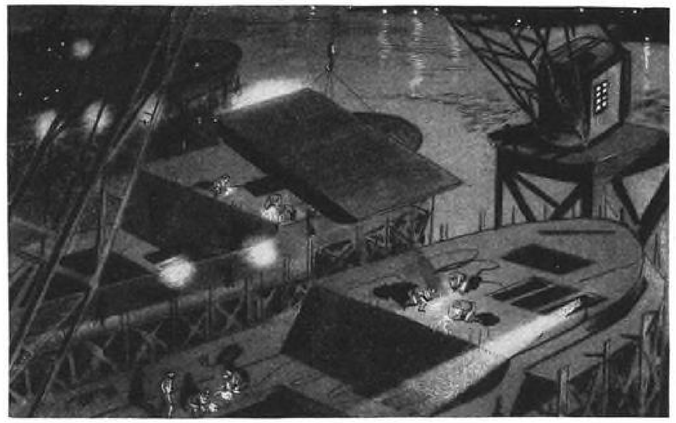

SHOP FABRICATION. Ships welded on a production line by assembly line methods—faster welding by positioning the welding—pre-fabrication of large sections—upside-down assembly—dozens of short-cuts make up this technique, recourse to which has revolutionized shipbuilding.

MASS PRODUCTION. If ships can be put on a mass production basis, think of the speed and economy in producing products less bulky. If speed alone were the only benefit of welding, *recourse* to it might be debatable. But consider these additional benefits:

LESS STEEL
On these 200 ships, *recourse* to arc welding saves 375,600 tons. Steel is critical. Steel costs money.

LESS HULL FRICTION
A welded Liberty ship leaving New York would reach Sicily 40 hours quicker than its rough-skinned sister of equal horsepower.

INCREASED CARGO
18% more cargo carrying capacity is provided by weight-cutting through *recourse* to arc welding.

America's greatest natural **recourse**

ARC WELDING


FREE!


Just off the Press!

INSTANT ANSWERS
TO VITAL AIRCRAFT
LUBRICATION QUESTIONS!



Important FACTUAL information on installation of fittings, including data on drilling and tapping.







Contains detailed illustrations and measurements of NAS-2 and AN Standard Lubrication Fittings as well as other standard and special fittings.

•

Detailed, actual-size drawings of fittings, with all specifications.

•

Contains complete details on hand guns, including capacities, dimensions and weights, and gives selected listing of power lubricating equipment.

Get your copy today, FOR ACCURATE READY-REFERENCE!

The new manual, "ALEMITE FOR AIRCRAFT LUBRICATION" is now ready. It is an accurate reference book, the result of continuing experience of Alemite Lubrication Specialists in cooperation with America's leading aircraft engineers. Packed with detailed drawings and photographs, measurements and important information that every aircraft manufacturer and maintenance man needs every day. Equally valuable in training new workers as it is written in simple understandable language and each fitting is fully explained. Send for your FREE copy, today.

Another Product of STEWART WARNER

ALEMITE
REG. U.S. PAT. OFF.
Industrial LUBRICATION

Ask Anyone In Industry!

ALEMITE HELPS THE WORLD GO ROUND

1865 Diversey Parkway, Chicago, Illinois • Belleville, Ontario



. . . Buckeye Equipment goes to work

WAR-TIME refueling must be efficient . . . accomplished without loss of time. Today, on numerous combat, training, and commercial airfields, at home and abroad, "when aircraft get thirsty," Buckeye time-tested refueling equipment gets the job done quicker . . . better.

Equipment by Buckeye is easy to use and requires little maintenance. Thus, Buckeye employs manpower sparingly—releasing men for other jobs—and efficiently handles all refueling operations with maximum economy.


Buckeye's pre-war reputation for reliability is proving itself today under the severe test of war-time service . . . The post-war era will find all Buckeye valves and fittings ready to do their part in expanding peacetime airfields to meet increased air traffic and even more rigid specifications. For complete information write to Buckeye Iron and Brass Works, Dayton, Ohio.

Buckeye

QUALITY VALVES AND FITTINGS
For Airfield Ground Service

Designed for Conditions

UPSTAIRS *in the* SKY

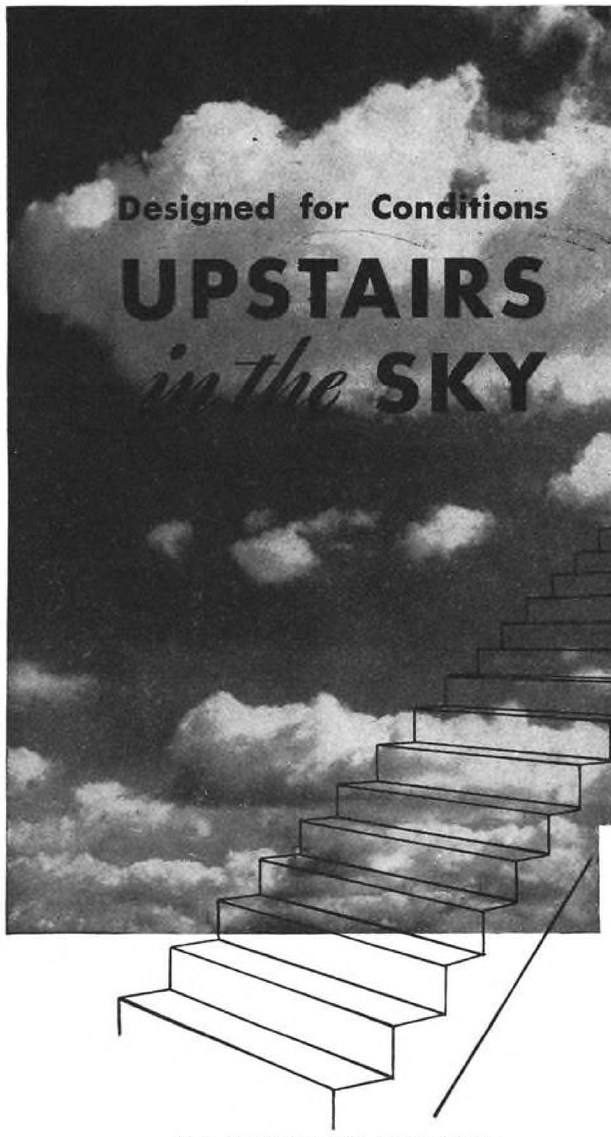

★ The higher—the fewer. And it takes very special equipment to be sure you can get on top—first.


Dole Aircraft Valves and Fittings are precision manufactured and rigidly inspected. Today they are helping U. S. planes fly higher and faster and do a better fighting job.

Tomorrow Dole engineers and production men will offer all this knowledge and experience, plus modern facilities, to help you solve your peace-time problems in aircraft and kindred industries.

Made in accordance with Army and Navy Aeronautical Standards

THE DOLE VALVE COMPANY
Established 1906
1901-1941 Carroll Avenue, Chicago 12, Illinois
LOS ANGELES DETROIT PHILADELPHIA

DOLE

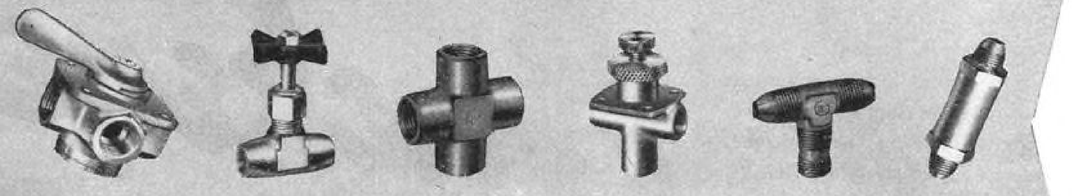

AIRCRAFT VALVES AND FITTINGS



PANELYTE*


AIRCRAFT FLOORING

Reduces Load of 50 Ton Plane By MORE Than 400 Pounds

PANELYTE re-inforced aircraft flooring, surpassing all other standard floorings in high-strength light-weight characteristics, was developed by engineers of the Glenn L. Martin Company to meet the urgent need for a light-weight flooring to cut down poundage. » » One of the more than 2,000 molded and fabricated parts we are turning out for the Aviation Industry alone, Panelyte Flooring is readily cut to size and shape desired, easily installed and attachment made with standard fasteners. PANELYTE sheets, rods and tubes of paper, fabric and asbestos base are speeding up production for the Navy, Signal Corps, Air Corps and other branches of our Armed Forces. Prompt delivery can be made on all standard grades. » » The versatility of our many structural grades may offer a guide and ready solution, and the Panelyte Engineering Staff will be happy to cooperate with you.

1/4 POUND PER SQUARE FOOT IN WEIGHT SAVED

PANELYTE Flooring weighs approximately ¼ pound less per square foot than any flooring of equal strength and carrying capacity. The laminated top sheet is molded onto a corrugated base with an aluminum insert integrally molded into the lower horizontal surface. Designs can be changed to produce flooring of various strengths for specific applications.




EQUAL TO ANY IN STRENGTH AND CARRYING CAPACITY

Molded of strong, fabric base plastic, PANELYTE Flooring more than measures up to official strength requirements for flooring in bombers and combat planes. Note section bears weight of heavy man without buckling — or sagging.

• • •

EASIER TO INSTALL — LESS OPERATING COST — MORE CARGO

Requiring no special procedure or bracing, PANELYTE Flooring is laid on frames 10" to 20" apart, and speedily attached with standard fasteners, rivets or bolts. The prime reason for the increasing use of PANELYTE Flooring is not its substantial initial economy — but its *outstanding, long run performance!* Because of the weight it saves, more ammunition is being carried to blitz the Axis today — and flying will be more profitable in peacetime skies. With PANELYTE Flooring installed, operating costs automatically diminish — and payloads can be increased.



PANELYTE HEAVY-DUTY CARGO FLOORING

Rugged flooring of *light but sturdy construction;* high-strength PANELYTE cured to the top and bottom of a plywood core; specially developed to withstand severe abuse of tank, guns, machinery transportation; loading surface molded with morocco or smooth finish. This rugged flooring is readily fabricated by standard wood-cutting tools.


*PANELYTE DIVISION, ST. REGIS PAPER COMPANY . . . AMERICA'S LARGEST PRE-PEARL HARBOR PRODUCER OF THERMO-SETTING MOLDED LAMINATED PLASTICS

PANELYTE *the structural plastic*

PANELYTE DIVISION
ST. REGIS PAPER COMPANY
230 PARK AVENUE
NEW YORK

Sales Offices: ATLANTA, CHICAGO, DALLAS, DENVER, DETROIT, HOUSTON, KANSAS CITY, LOS ANGELES, MONTREAL, NEW ORLEANS, ST. LOUIS, ST. PAUL, SAN FRANCISCO, SEATTLE, TORONTO, VANCOUVER

MASS PRODUCTION OF SHEETS, RODS, TUBES, MOLDED FORMS, FABRICATED PARTS
Experienced and reliable Fabricators in Industrial Centers from coast-to-coast

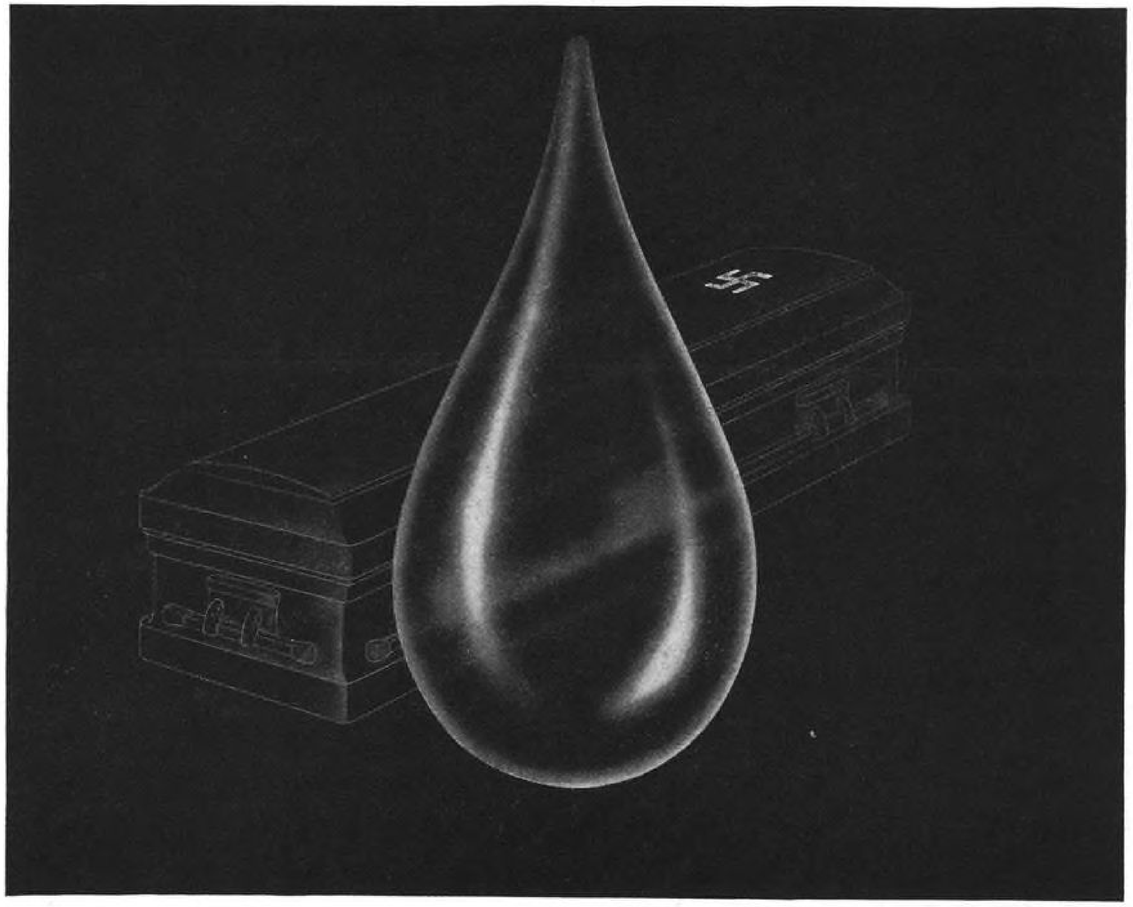

LAST NAIL IN THE AXIS COFFIN

IF YOU want to know what catalytically cracked aviation fuel has meant to America's war effort, we suggest you read "Fightin' Oil," by Petroleum Administrator Harold L. Ickes. In this highly informative and to-the-point volume, he says:

"When I said that even 100-octane gasoline is beginning to be a little old-fashioned, I was probably thinking more particularly of the catalytic cracking plants that are now opening up in many parts of the country with startling regularity. They come close, in my opinion, to being the last nail in the coffin of the Axis. The new superfuel that they produce has quality factors which make it even better than the 100-octane of a year ago, and the use of it gives the American-made plane the advantage of greatly superior speed and maneuverability. Fueled with it, one of our bombers can carry a 25 per cent greater bomb load. In other words, on a long-range offensive to the Axis capitals, 1,000 American-made four-engine bombers with an aggregate bomb capacity of 8,000,000 pounds would be able to transport 2,000,000 more pounds of explosives on every visit than if fueled with yesterday's 100-octane gasoline. A two-engine bomber with a 4,000-pound bomb capacity can carry another 1,000 pounds. And that, as someone has observed, 'ain't feathers'."

When Mr. Ickes' book was published in June this year, 17 out of 20 (now it's 20 out of 24) catalytic cracking units in operation were Houdry units. They had produced more than 90% of *all* catalytically cracked aviation fuel for the United Nations.

HOUDRY CATALYTIC PROCESSES ... FOR VICTORY IN WAR ... FOR PROGRESS IN PEACE

HOUDRY PROCESS CORPORATION, WILMINGTON, DELAWARE

Houdry Catalytic Processes and the Thermofor Catalytic Cracking Process are available through the following licensing agents to all American refiners, subject to approval by the U. S. Government.


E. B. BADGER & SONS CO. Boston, Massachusetts • BECHTEL-McCONE-PARSONS CORP. Los Angeles, California • THE LUMMUS COMPANY New York City, New York





E. A. LABORATORIES, INC., BROOKLYN, N. Y.

MAKERS OF AUTOMOTIVE, AVIATION AND MARINE APPLIANCES

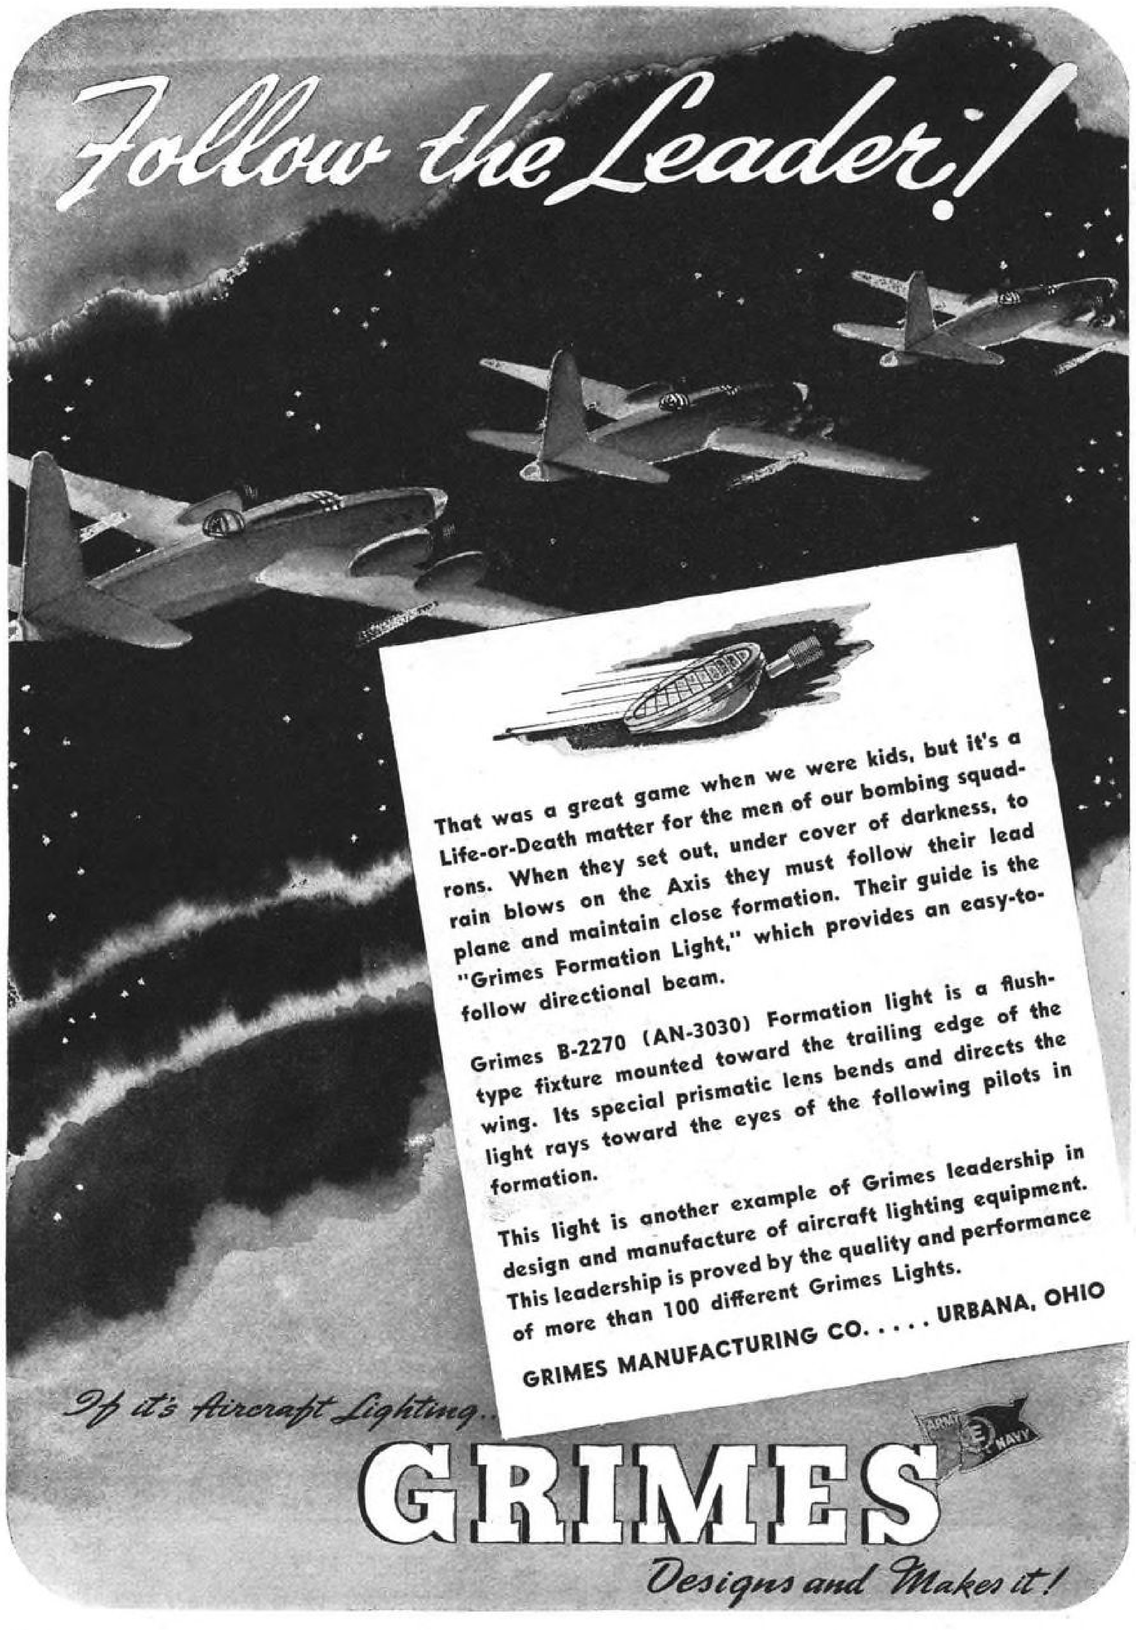

MARTIN USA
REG. U. S. PAT. OFF.

"Another Martin First!"



AMERICA'S FIRST *power-operated aerial gun turrets were built in 1937 by Martin for its PBM-1 Navy patrol bomber (shown at left). Martin pioneering paid big dividends to America's war effort.*

U. S. Planes Pack a Potent Punch thanks to MARTIN-MADE GUN TURRETS


HOW does it happen that Martin, long famed for its fighting planes, is now also one of the world's largest manufacturers of power-operated aerial gun turrets? As far back as 1937 Martin engineers had foreseen the need for powered gun turrets and built America's first for their PBM-1 patrol bomber. When, in 1940, General Arnold proclaimed power gun turrets a "must," Martin was ready with actual experience and production know-how. Results: Martin is now mass-producing turrets not only for Martin aircraft, but for many other U. S. types as well. When you see pictures of high-speed bombers, the chances are 9 out of 10 that they are defended with Martin turrets.

Mass-Producing Gun Turrets

To give U. S. bombers a pulverizing punch and to lessen the need for fighter escort, Martin has turned its entire Sinclair division over to the manufacture of turrets. Martin engineers, seeking ways to turn out turrets faster, achieved these results. The inner ring was cast as a single unit . . . moving assembly lines were perfected . . . and the "chassis" of the turret was cast in one piece, a feat which many experts had deemed impossible. Today, turrets . . . both electrically and hydraulically powered . . . are rolling from Martin assembly lines to make U. S. bombers feared by enemy airmen.

New Improvements

Hardly a week passes without changes or improvements being made in Martin turrets, to keep well ahead of the enemy. Plastics are being utilized to save metal . . . added comfort and protection are provided for gunners . . . and in numerous other ways Martin gun turrets are being improved to give U. S. planes a punch that spells "k.o." for the Axis—and Victory for US.

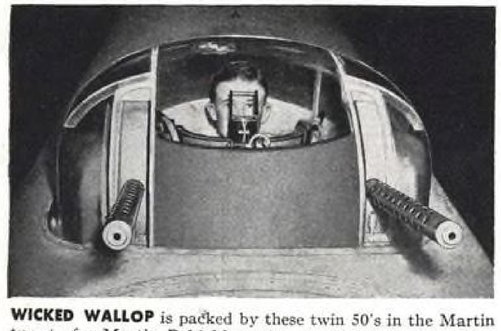

WICKED WALLOP is packed by these twin 50's in the Martin turret of a Martin B-26 Marauder. At high altitudes, where the slightest exertion is an effort, power turrets, easily operated by a twist of the wrist are vital to Victory.



TORRENT OF TURRETS pours from Martin factories, via moving assembly lines like this. Simplified design and advanced tooling boost Martin output. At end of line, guns are installed and turrets are ready to do business with Hitler.

THE GLENN L. MARTIN CO., BALTIMORE, The Glenn L. Martin-Nebraska Company—Omaha

Martin AIRCRAFT

Builders of Dependable Aircraft Since 1909

Something has happened in the sky



...and in the minds of America's millions

WHILE THESE MEN look upward, take a look at *them*. They're specialists. Infantry. Signal Corps. Tanks. Ranger. Paratrooper. Each important in battle.

No one expects the infantryman to out-slug the tank gunner. No one expects the Signal Corps to out-fight the Ranger. America knows that none is "best"—rather that each will do his job and do it well.

And finally, into the minds of America's millions has penetrated the parallel that can be drawn in the sky. That there is no "best" airplane, but rather a *right* airplane for every job, every speed, every altitude, every degree of load or firepower that Victory demands.

Since September 1942, Roebling has used the pages of the national magazines to tell this story in detail—to explain how the aircraft made by each American manufacturer is equipped to do its specific job and do it well.

We hope that in some small way these messages of ours have helped America to know its debt—to the names the U. S. must never forget.

Aircord Division

JOHN A. ROEBLING'S SONS COMPANY

TRENTON 2, NEW JERSEY

Branches and Warehouses in Principal Cities

Salute TO THE JOB THEY'RE DOING

AERONCA
AIR CRUISERS
BEECH
BELL
BELLANCA
BOEING
BOWLUS
BREWSTER
CESSNA
COLGATE
COMMONWEALTH
CONSOLIDATED-VULTEE
CULVER
CURTISS-WRIGHT
DOUGLAS
FAIRCHILD
FLEETWINGS
FLETCHER
FORD
G & A AIRCRAFT
GENERAL MOTORS
GOODYEAR
GRUMMAN
HOWARD
INTERSTATE
LOCKHEED
MARTIN
McDONNELL
NORTH AMERICAN
NORTHROP
PIPER
REPUBLIC
RYAN
STEARMAN
TAYLORCRAFT
TIMM
VEGA
CHANCE VOUGHT
WACO

ROEBLING *means Control in the Air!*





Australia
June 18, 1943

Hallicrafters
Chicago, Illinois
U.S.A.

Dear Sirs:

In the May issue of QST, appeared a picture of your Hallicrafters Model S-29 Radio...and a group of men and myself listening in on a program...in the New Guinea area.


The Radio which appears in this picture was purchased by myself in August, 1941. This same radio has been in continuous operation...and has caused no trouble.

This Hallicrafters Model S-29 was one piece of equipment which every man...was anxious to carry. It was carried at all times...through New Guinea jungles...in the midst of a jungle swamp ...where tropical rains fell heavily...in extreme damp heat, this radio never once faltered. It brought untold relief to every fighting man... caused tense nerves to become relaxed, bringing happy moments to dark surroundings. The part played by this instrument could never otherwise be duplicated. Every night...the fellows would listen to the news from home. Notes were taken ...and news was called to the troops on front line duty. Without this radio there would have been no contact with the outside world.

This same radio is operating perfectly and the only replacement needed was a new set of tubes.

Sincerely yours,
Glen V. Blakeslee


Glen V. Blakeslee

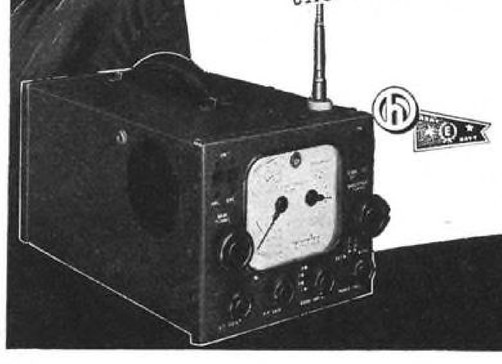

BUY MORE BONDS!

the hallicrafters co.
CHICAGO, U.S.A.
WORLD'S LARGEST EXCLUSIVE MANUFACTURERS OF SHORT WAVE RADIO COMMUNICATIONS EQUIPMENT

"FIRE POWER"—

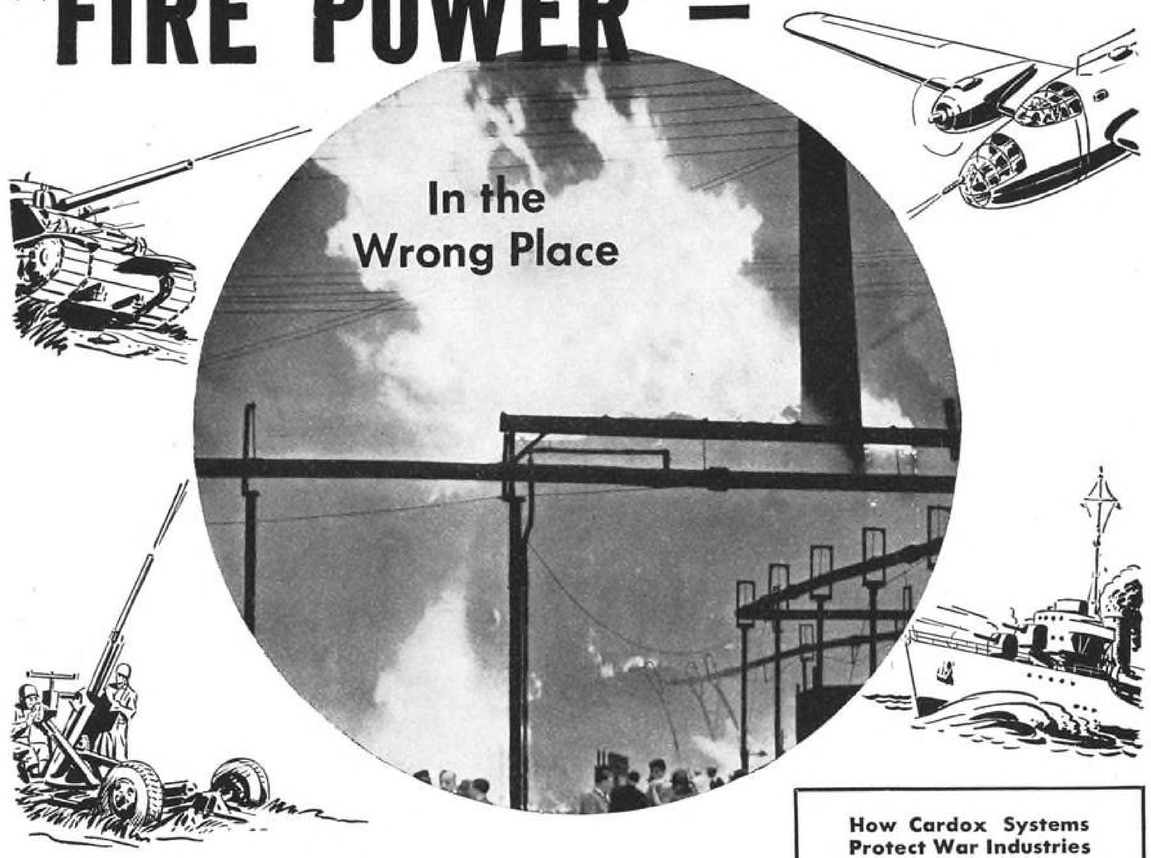

IS A LIABILITY

"Fire Power" is a two-edged force. Applied by our weapons of war, it is driving the enemy nearer and nearer to complete defeat. Generated by combustibles in a vital war plant, "fire power" can cause crippling delays of war production in a dozen other plants.

Cardox Fire Extinguishing Systems are helping assure plenty of *effective* fire power for our fighting forces by guarding against *destructive* fire power in plants producing such critical war products as:

Airplanes, Airplane Parts, Armor Plate, Aviation Carburetors, Aviation Engines, Cold Strip Steel, Electric Power, Engine Parts, Forgings, Motor Fuel, Plastics, Processed Fabric, Rubber Products, Solvents, Tanks, Tank Engines.

An extremely wide variety of indoor and outdoor hazards—large or small—can be efficiently protected by individually engineered Cardox Fire Extinguishing Systems. By instant smothering of fire and cooling of combustibles through mass discharge of low pressure, low temperature carbon dioxide, they provide the all-important advantages of fast, complete extinguishment . . . *without damage to plant and equipment by the extinguishing medium.*

Today Cardox is concentrating on (1) Fire Extinguishing Systems needed to insure more effective "fire power" for our Armed Forces; (2) plans to increase the efficiency of fire protection, both today and after the war.

If you would like more information, write on company letterhead for Bulletin 3113

CARDOX CORPORATION
BELL BUILDING • CHICAGO 1, ILLINOIS

District Offices in New York • Washington
Detroit • Cleveland • Atlanta • Pittsburgh
San Francisco • Los Angeles • Seattle

How Cardox Systems Protect War Industries

- Timed discharges, as needed, through built-in piping systems . . . supplied instantly from a single storage unit holding tons (if required) of liquid Cardox CO_2.
- Mass discharge of Cardox CO_2 "knocks out" fire, by . . .
- Reducing oxygen content of the atmosphere below the concentration necessary for combustion, and . . .
- Cooling combustibles and fire zone below ignition temperature . . .
- Extinguishing fire quickly and completely *without* damage from extinguishing medium.

CARDOX—CO_2 Systems with Enhanced Fire Extinguishing Performance

A. Uniformity of CO_2 characteristics.
B. Extinguishing medium with uniformly greater cooling effect.
C. Accurate projection of CO_2 through greater distances.
D. Timed discharges, as needed, through built-in piping systems . . . supplied quickly from a single tank holding tons of liquid Cardox CO_2.

MASS DISCHARGE OF CO_2 · ENHANCED COOLING EFFECT · CENTRAL STORAGE UNIT · AMPLE CO_2 RESERVE · ENGINEERED SYSTEMS · MANUAL OR AUTOMATIC CONTROL


CARDOX

NON-DAMAGING FIRE EXTINGUISHING SYSTEMS

TOMORROW'S RELAYS TODAY


by

ALLIED

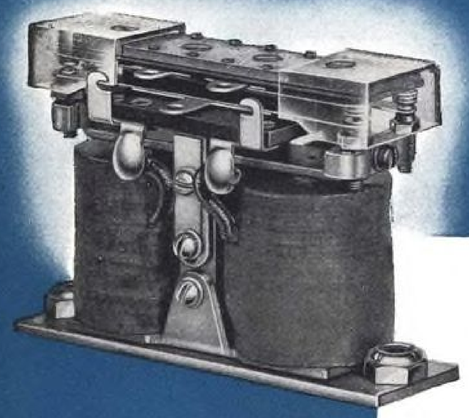

AN Example:

"CS" CURRENT DIFFERENTIAL RELAY



Operating Characteristics
Allied's "C S"
Current Differential Relay

Balanced Armature Construction.
Contact Rating: 5 amperes at 110 Volts AC.
Standard Switching Combinations up to Double Pole Double Throw.
Coil Resistance up to 8,000 ohms.
Can be adjusted to throw on 1.5 mills differential.
Will take 10 G. vibration.
Available in Sealed Cans.
Dimensions: 2 11/16x1x1⅞ inches.
Weight—7 oz.
Patent Pending.

Allied's "C S" Current Differential Relay was developed to do in very small space and with great reliability a job for which there were no standard relays available. Its design and production was a critical test of Allied's ability to *originate* where nothing on the market met this special assignment.


"C S" is outstanding in its close differential and dependability—it gives maximum contact capacity with small operating power—it can be used in polarized circuits—and it is extremely small in size and light in weight.

"CS" is ruggedly built for long life in the performance of its delicate and sensitive operations.

Each day brings us new and equally difficult problems requiring originality and ingenuity.

ALLIED CONTROL COMPANY
INCORPORATED
2 EAST END AVENUE • *(AT 79th STREET)* • **NEW YORK 21, N. Y.**
FACTORIES: NEW YORK CITY • PLANTSVILLE, CONN. • CHICAGO, ILL.

This is the fourth of a series of statements by aviation's leaders on THE SHAPE OF FLYING TO COME.

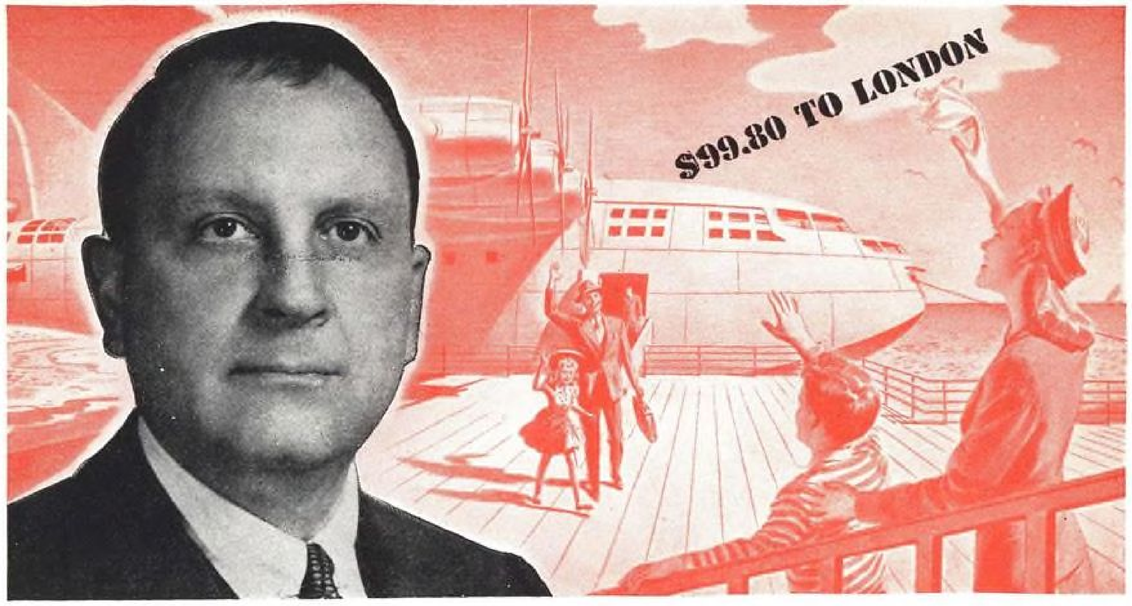

"Aviation's next job is to help the common man!"

says Juan T. Trippe, President of Pan American World Airways System

"LET ME SUGGEST *some ways in which air transport can be made more completely the instrument of the common man.*

"One way is to assume our natural responsibility as a private enterprise and to offer the most value to the most people. For example, we at Pan American have chosen to carry the average man for what he can afford to pay.

"Over a year and a half ago, Pan American started its program for the construction of 50 giant Clippers, each capable of carrying 153 passengers from New York to London in 10 hours, at a fare of a hundred dollars. The same Clippers, operating over other Pan American Airways routes would provide 24 hours service to Australia or China, 22 hours to Buenos Aires—at comparably low fares. And in future years, we will do even better.

"Air transport will bring greater prosperity to us all by providing frequent and cheap communication over national boundaries and between continents—by stepping up the tempo of trade and commerce all around the world.

"And thus air transport will foster international good will and carry civilization to the common man in the remotest land in the remotest sea."

And thus Mr. Trippe voices the hopes and promises of one of the great institutions in an industry destined to play a Titan's part in the postwar world. Just how that part will be enacted is not yet clearly defined, but—

—for every project launched by aviation in the years after the war, there must be a waiting "test-pilot-market"—people who (in business or in private living) are habitually first to accept any new idea that signals progress.


These are the people aviation thinks of when it thinks of the more than a million TIME-reading families—people with the kind of foresight, income and influence that aviation must have to sponsor its ambitious programs.

Believing that the ideas of aviation's leaders are always of interest to the aviation industry, TIME here gives them wider circulation in the name of

AVIATION'S SILENT PARTNERS

TIME

THE READERS OF TIME

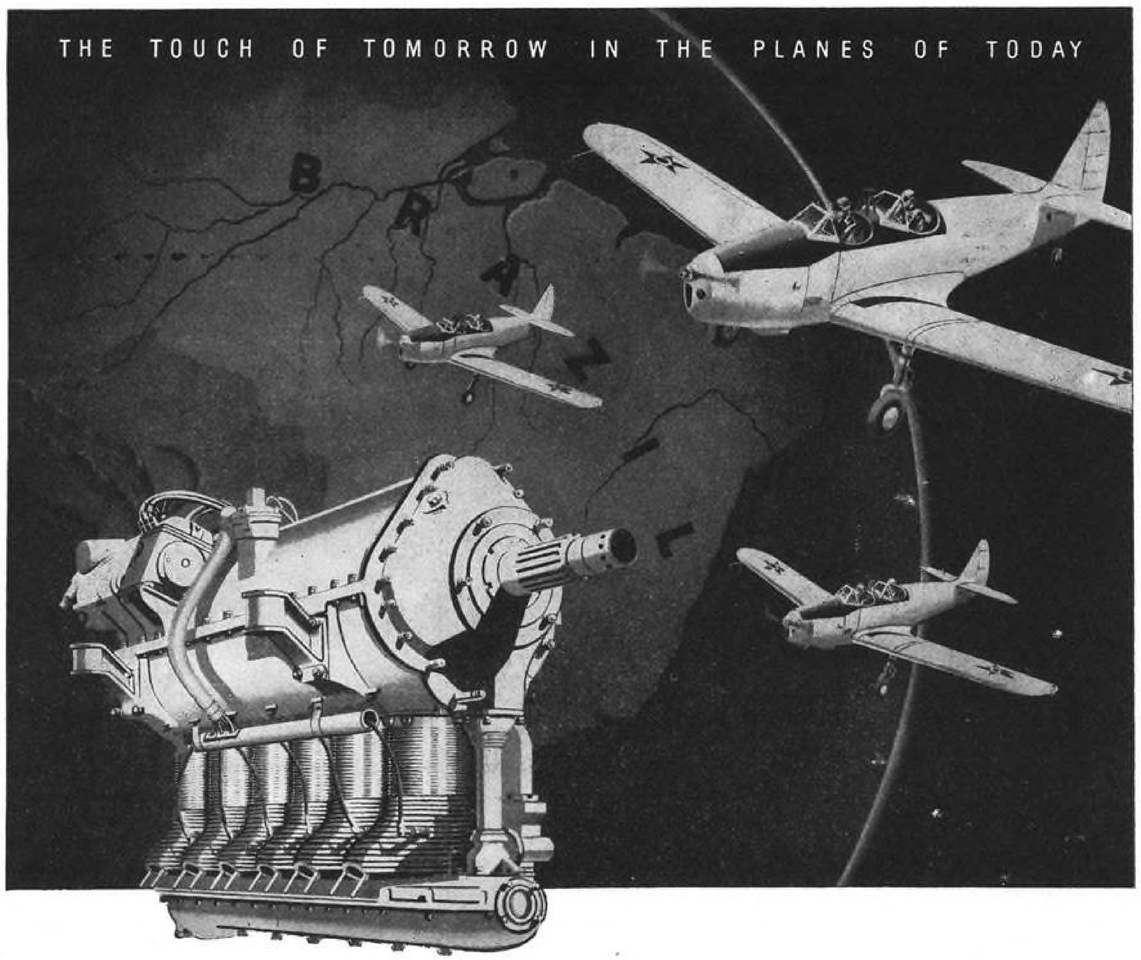

More Air Power for another United Nation

The Brazilian Air Force will soon get six-cylinder, inverted, in-line, air-cooled Ranger engines made in Brazil, under a contract recently signed by that good neighbor's Government and the Fairchild Engine and Airplane Corporation.

Brazil-made Rangers, to power its air force's primary trainer, the Fairchild PT-19, will enable Brazil to turn out better pilots than ever in an even shorter space of time.

Ranger-powered PT-19's, with "fighter" characteristics, are ideal for the strenuous course of acrobatics included, today, in practically all United Nations' primary flight training. Unlike the trainers used in the last war, the PT-19 with its Ranger engine, can *safely* do every maneuver in the book: slow rolls, snap rolls, Immelmanns, loops, half rolls, inverted coordination exercises and turns, vertical reversements, spins, and combinations of these. The result —better pilots trained faster.

Brazil-built Rangers will also power Muniz M-9 biplanes and 2-engine Grumman Widgeons currently seeing service in Brazilian coastal patrol, Amazon River patrol and mail delivery. Thus, to the Brazilian Air Arm is added that "touch of tomorrow in the planes of today," which characterizes Fairchild planes and engines everywhere.

BUY U.S. WAR BONDS AND STAMPS

RANGER AIRCRAFT ENGINES

Division of Fairchild Engine and Airplane Corporation · Farmingdale, Long Island



BOTTLENECKS

DAMN THE TORPEDOES FULL SPEED AHEAD!

Making only Mounted Wheels and small Grinding Wheels—maintaining highest quality in spite of large quantities and rush orders—shipping them promptly. *This is our job, our battlefield.*

With full WPB approval, we stopped making all large size grinding wheels and fixed our sights on wheels *3" in diameter and under.*

We worked all around the clock, 24 hours a day, and in a short time were able to fill orders on time—And, our central location cuts time in transit. Today, there is no waiting. With the Army-Navy E at our masthead, we are going full speed ahead.

AMERICA'S HEADQUARTERS FOR MOUNTED WHEELS SMALL GRINDING WHEELS

Half a century of specialization has established our reputation as the Small Wheel People of the Abrasive Industry. You can bank on us.

TEST WHEEL FREE—To get acquainted with Chicago Wheels, let us send one postpaid. Tell us size wheel and material you wish to grind.

Write for illustrated catalog

ARMY E NAVY

CHICAGO WHEEL & MFG. CO.


1101 W. Monroe St., Dept. AV, Chicago 7, Illinois

AV-11

Send Catalog. Interested in:
☐ Mounted Wheels ☐ Grinding Wheels ☐ Send Test Wheel. Size____

Name____

Address____

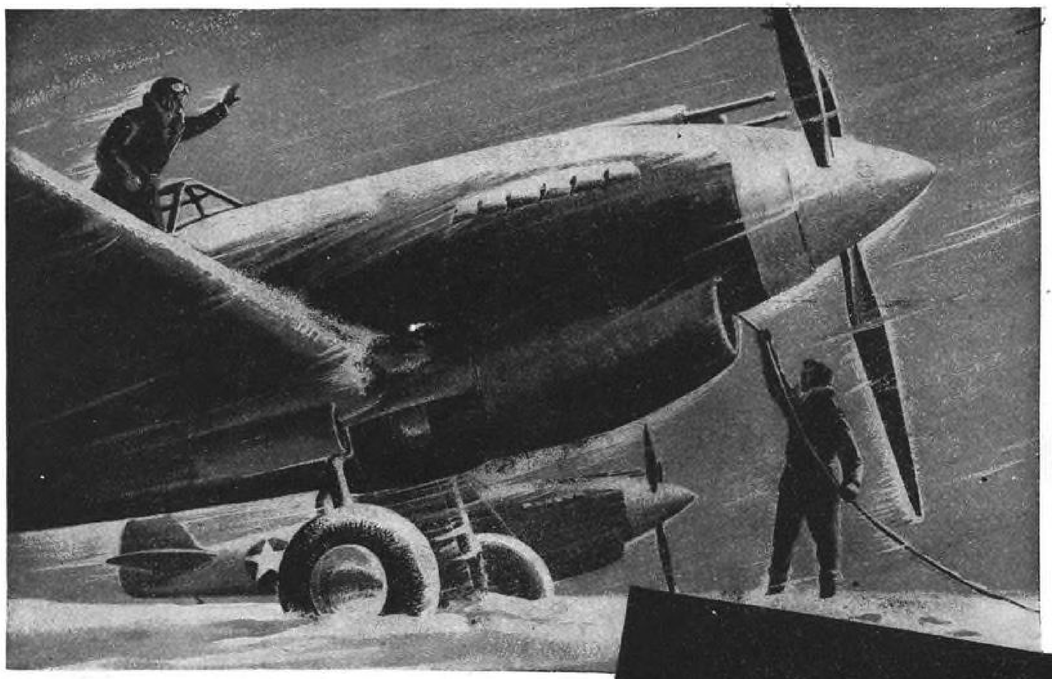

They wanted to get a

COLD fighting plane up for work FAST!



Airplane engine oil preheater, weighs only 15 ozs., is installed in the tank of the plane and submerged in the oil. It's as easy to plug in as an ordinary toaster or radio. The heating unit in hand has a Monel sheathed heating element of Nichrome wire.

...and Cities Service Oil Co. designed an electric heating unit to do it with a sheathing made of an INCO Nickel Alloy

Do you need a specialized metal for an unusual piece of war equipment? Are you developing a new post-war product which requires special characteristics in a metal?

If so, chances are you'll find exactly the metal you want among the INCO Nickel Alloys. For example, there's the story of the heating unit referred to above.

Starting an airplane engine in a hurry when it's bitter cold has long been a problem because the oil often gets as thick and sticky as cold vaseline. So the Research Division of Cities Service developed a special electrical heating unit.

This device not only heats the transmission oil to 130° F. but has a thermostatic control which *holds* it there. Consequently, regardless of the outside temperature, the plane's oil is already warmed up, ready for instant take-off.

In order to heat the oil fast without burning it or coking up the unit, the heater circulates the oil rapidly, thereby eliminating the possibility of localized hot spots. A material that would maintain a fast heat transfer rate was required for sheathing the heating element.

Cities Service selected Monel for this application because it stays bright and clean at the element temperature of 400°-450° F. There is no decrease in the rapid rate of heat transfer from corrosion or scaling.

If you have a problem along related lines, write for our bulletin "Heat Transfer through Metallic Walls." You are also invited to call upon INCO's Technical service for aid on any question regarding other special characteristics in a metal. There, too, you may find a really workable solution with an INCO Nickel Alloy. The International Nickel Company, Inc., 67 Wall Street, New York, N. Y.


★ ★ ★ ★ ★ **INCO NICKEL ALLOYS** ★ ★ ★ ★ ★

MONEL • "K" MONEL • "S" MONEL • "R" MONEL • "KR" MONEL • INCONEL • "Z" NICKEL • NICKEL

Sheet . . . Strip . . . Rod . . . Tubing . . . Wire . . . Castings

NOW READY!

CLECO TYPE "P" *Triple-Safe* SHEETHOLDERS

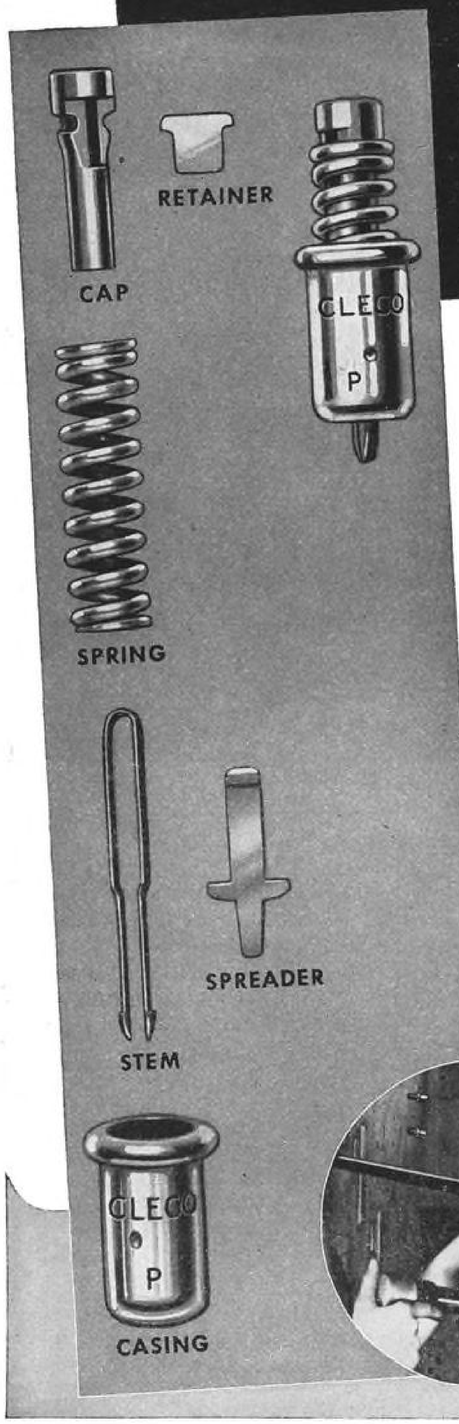


NOW offered by the original American manufacturers of quick fasteners for airplane skin, Type "P" Cleco's have the additional advantage that the parts will not "fly" if the stem breaks. Locked at 3 points, they are *triple-safe*. As in previous types, these Cleco's are repairable and each size is colored differently for quick identification. They can be handled with any style of pliers used in the past. CLECO pliers, always handy and compact, have now been improved further, and are the best obtainable.

Cleco Type "P" sheetholders can also be furnished with longer stems and spreaders for work requiring that a greater thickness be gripped. Standard unit holds thicknesses from 0" to 3/16". A longer stem and spreader combination holds thicknesses of 3/16" to 3/8". A still longer combination holds thicknesses from 3/8" to 9/16", and so on.

Type "P" sheetholders are available in sizes 3/32", 1/8", and 5/32". Parts are either pentrated (self lubricating) or plated —thoroughly rust-proofed. With required priority, shipment is surprisingly prompt. Send for Type "P" bulletin.


THE CLEVELAND PNEUMATIC TOOL CO.
3781 East 77th Street · Cleveland 5, Ohio
Branch Offices in all Principal Cities

BUY U. S. WAR BONDS AND STAMPS

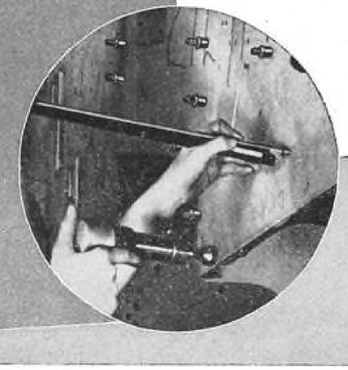

● Teammate with Cleco sheetholders is the RIV-N-JECTOR, astonishingly simple and effective device for reducing rivet losses 90% in aircraft work. Ask for *new* Bulletin 89.

The Advantage of a Single Source of Supply

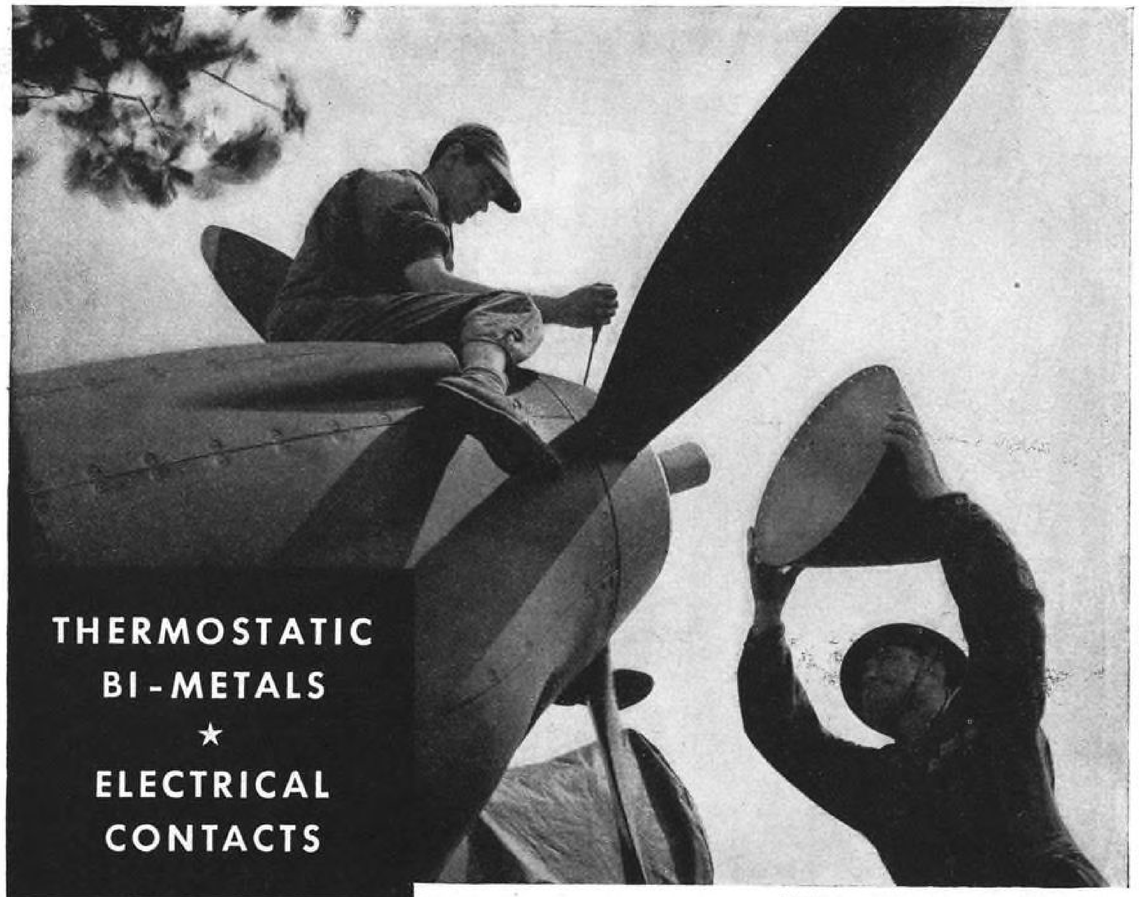

CURTISS-WRIGHT CORP. PROPELLER DIV. PHOTO

★ The facilities of the H. A. WILSON COMPANY permit manufacturing customers to secure both electrical contacts and thermostatic bimetal from a single source. This is important because materials from these two groups are frequently used in conjunction, as parts of the same device. The most effective use of one necessitates a knowledge of the other.

★ WAR stresses the vital importance of perfected team play; and either paired with the correct WILCO THERMOMETAL, or used alone, WILCO Aeralloy Aircraft Magneto Contacts are doing their part to assure *smooth* airplane performance through their own unfaltering performance under gruelling conditions in aircraft magnetos.

★ WILCO THERMOMETALS (thermostatic bimetals) are used for engine oil controls, compensation in voltage regulators, and dependable action in other precision instruments.

★ WILCO THERMOMETALS are also used in various instruments for the Army and Navy—and WILCO Electrical Contacts in tank, gun and ship applications.


★ WILCO sales and engineering representatives are familiar with both Electrical Contact and THERMOMETAL application.

WILCO PRODUCTS ARE:

Contacts — Silver, Platinum, Tungsten, Alloys, Powder Metal. *Thermostatic Metal*—High and Low Temperature with Electrical Resistance from 24 to 530 ohms per sq. mil.-ft. *Precious Metal Collector Rings* for rotating controls. *Jacketed Wire*—Silver on Steel, Copper, Invar, or other combinations requested.

AERALLOY
REG. U.S. PAT. OFF.

THE H. A. WILSON COMPANY
105 Chestnut St., Newark, N. J.
Branches: Chicago ★ Detroit

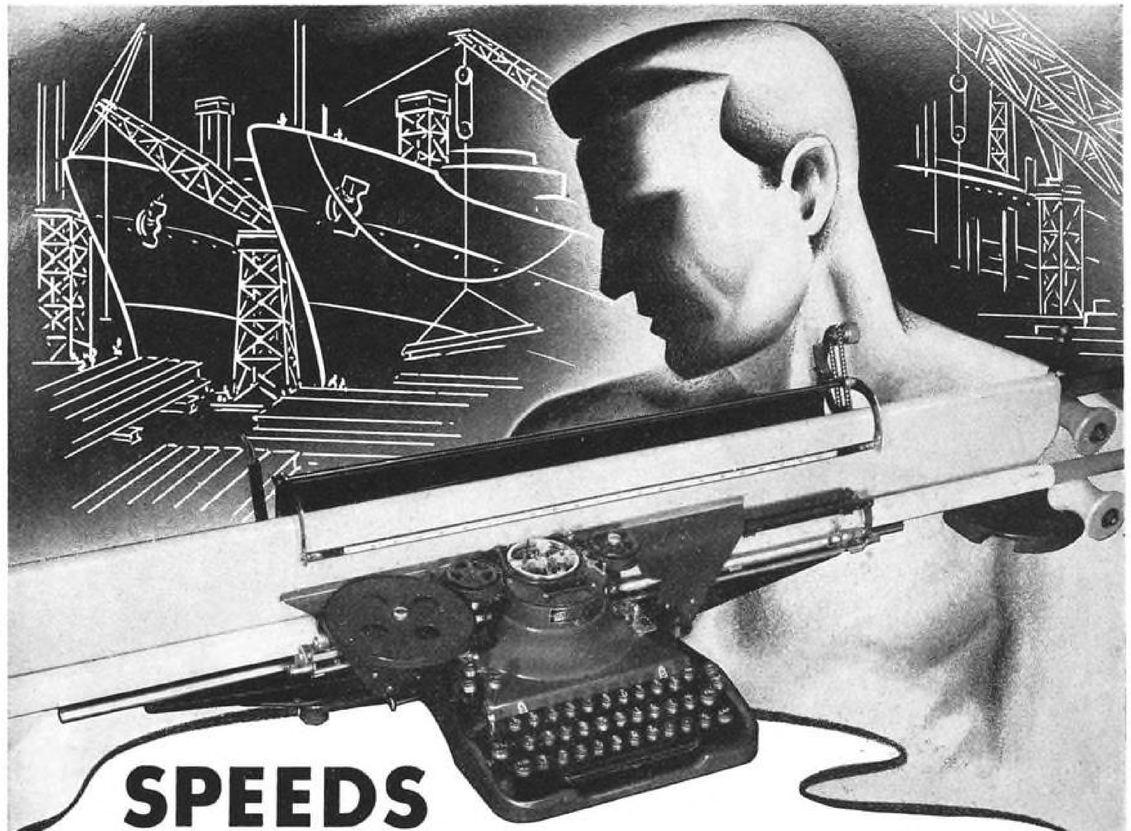

SPEEDS *Thought into Action*

Here's a practical, tested way to get drawings and tracings *off the boards* faster and at the same time to be certain of distinctive uniformity and legibility for all lettering. By using it, you save up to 70% of your draftsmen's lettering time, utilize their full skill on drawings, and thus ease your manpower problem.

The Vari-Typer Engineering Model was designed expressly for lettering notes, bills of material and dimensions on tracings. It accommodates cloth or paper of any size without folding; produced clean, sharp, legible lettering of various type sizes and styles; eliminates production errors due to poor hand lettering; assures clear blueprints black and whites, photolitho and tracing reproductions. Any competent typist can readily learn its operation.

A West Coast shipyard saved 19,500 hours of hand lettering on 6 Liberty ships. A large Philadelphia electrical firm saved the time of 15 draftsmen by using 3 Vari-Typers. *General Electric, Worthington Pump, Boeing Aircraft*, these are only a few of the scores of companies which report similar savings.

Write for complete information, or let us make a demonstration in your own plant on your own work.

Other models of Vari-Typer are available for use in composing for instruction books, bulletins, parts lists, house organs, etc., for reproduction by photo-offset, multilith, mimeograph, gelatine or any other reproduction processes, saving 50% or more in time, materials and cost as compared to ordinary methods.

BRANCHES IN PRINCIPAL CITIES

VARI-TYPER

TEXT COPY VARI-TYPED

BUY WAR BONDS

RALPH C. COXHEAD CORPORATION
333 SIXTH AVE., NEW YORK 14, N. Y.

☐ Please send information and samples on Engineering Model
☐ Please arrange appointment for demonstration
Name ..... Title .....
Company .....
Address .....
City ..... State .....

Multilith gets it from factory to fighter. . . FASTER



Remember moving day with all the worry and confusion of moving a single van load of household goods 'round the corner? Imagine what a colossal moving job Uncle Sam faces *every* day—thousands upon thousands of articles—all varieties, shapes and sizes—to be gathered into vast depots and then sped to fighting men scattered all over the world.

Think of the coordinating, timing, and record-keeping involved. One detail alone—the shipping documents that must accompany each shipment, customarily required writing up and running copies of ten different forms.

Working with U. S. Quartermaster Corps and Army Service Forces, Multigraph* men developed a method of using pre-printed master sheets called Systemats*. The Systemat carries "constant" data so that only variable transportation information need be written in by hand or typewriter. Then the Systemats are put on a Multilith* machine to automatically reproduce the many accurate *and permanent* copies that are needed.

By this method a single document replaced the 10 forms formerly used. Time is saved, manpower released, errors eliminated, identification of items made easy, and supplies get to our fighting men more quickly.


Multilith Systemats are being used in innumerable new ways to streamline paper work of war. Systemat is a word new to American business and industry. Remember it! Systemats can save time, money, and manpower in every department from factory tool room right up to president's office. Let us show you. Write Addressograph-Multigraph Corporation, Cleveland—and in principal cities of the world.

*T. M. Reg. U. S. Pat. Off.

Multigraph

TRADE-MARK REG. U.S. PAT. OFF.

SIMPLIFIED BUSINESS METHODS

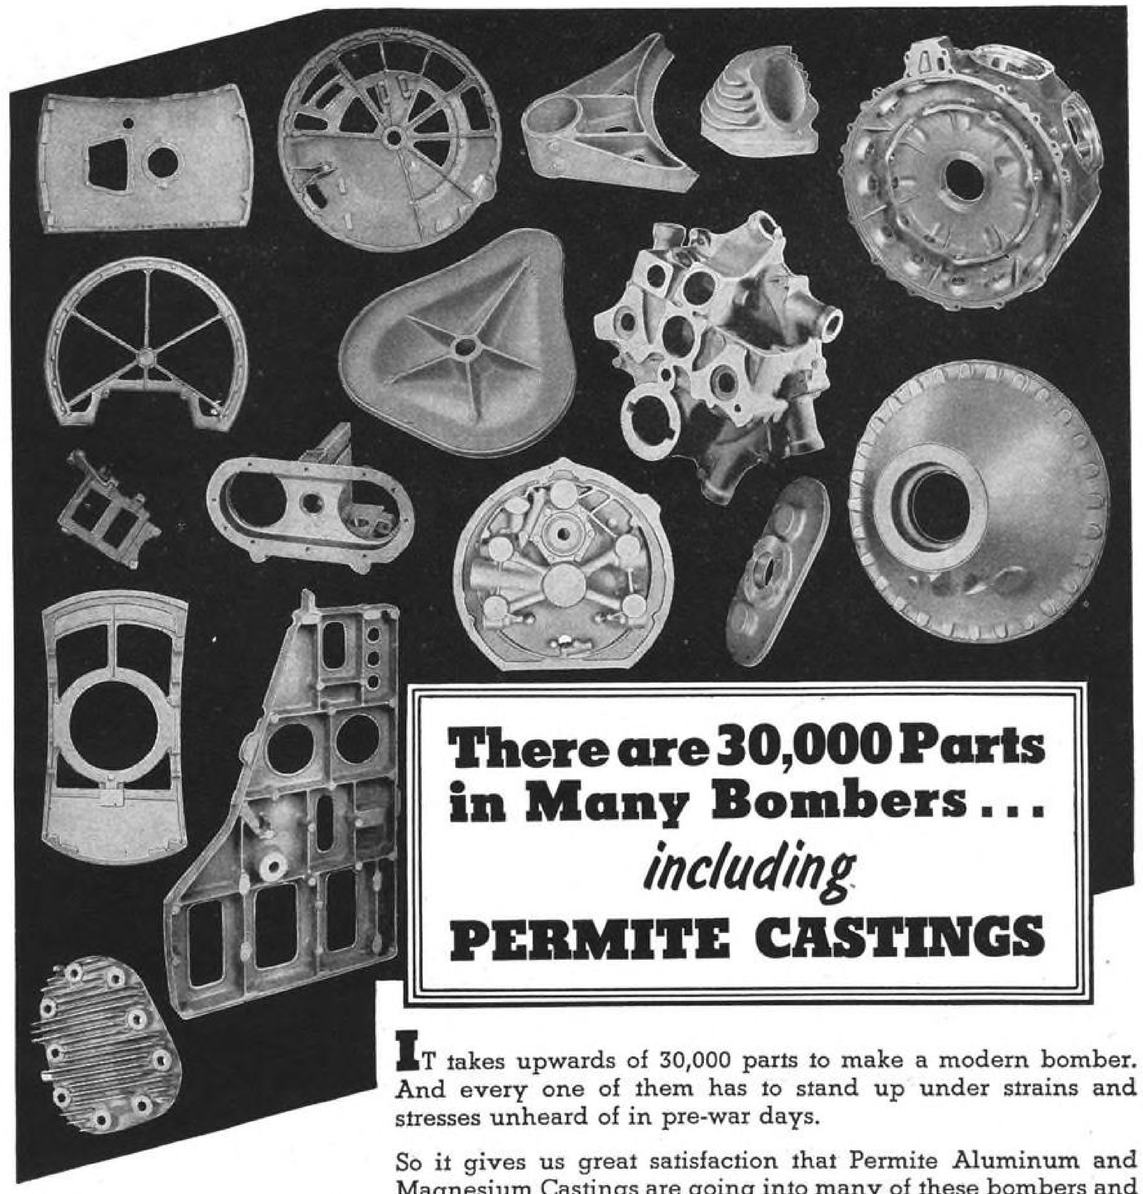

There are 30,000 Parts in Many Bombers . . . *including* PERMITE CASTINGS

IT takes upwards of 30,000 parts to make a modern bomber. And every one of them has to stand up under strains and stresses unheard of in pre-war days.

So it gives us great satisfaction that Permite Aluminum and Magnesium Castings are going into many of these bombers and are meeting every requirement of wartime use. Their added strength, better machining qualities and freedom from porosity come from the long experience of an organization that has pioneered in this type of alloy work.

If you have the necessary priorities, our greatly expanded production may enable us to supply you with Permite Aluminum and Magnesium Castings even now. Feel free to consult the Permite engineering staff about your casting requirements, without obligation.

ALUMINUM INDUSTRIES, Inc., Cincinnati, Ohio

Detroit: 902 New Center Bldg. Los Angeles: 324 N. San Pedro St. Chicago: 616 S. Michigan Ave.

PERMITE ALUMINUM AND MAGNESIUM ALLOY CASTINGS



Fixed base operators who use AIRWING AVIATION TAPES in their everyday work tell us these tapes mean "thumbs up" literally as well as figuratively. The smooth cardboard core in each roll of Airwing Tape goes over the thumb for easy unrolling. This is just an Airwing extra added to dependable, high-strength and light weight.

AIRWING AVIATION TAPES come in a complete selection — Grade A made from long staple Pima cotton, Lightweight and Utility — pinked edge, sealedge, biased and pre-doped. The complete Airwing line also includes airplane and glider fabrics, balloon and utility cloths.

If stock items of cloths or tapes do not meet your requirements, bring your special problem to Thurston — supplier to the Army and Navy since World War I.


Thurston Cutting Corporation

40 WORTH ST., NEW YORK Factory and Warehouse: 17 Beach St., N. Y.

REG. U. S. AIR WING PAT. OFF. FABRICS

Write us for the name of your nearest AIRWING Distributor

New! **SILVER-PLATED Fuse Clips AT NO EXTRA COST!**

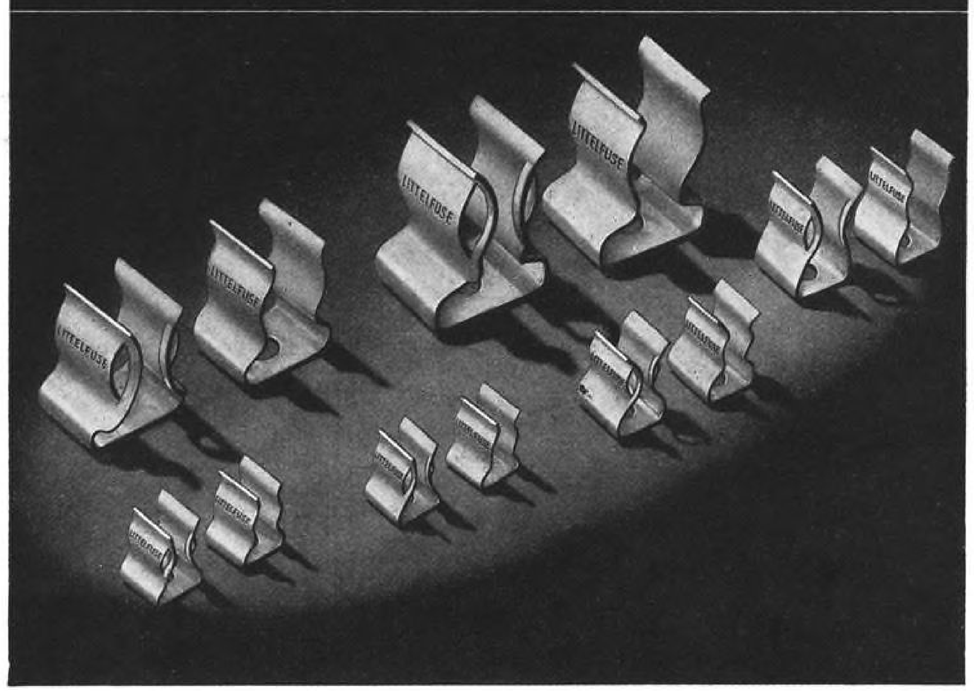

LITTELFUSE *Silver-Plated* Beryllium Copper Fuse Clips!

(Another Littelfuse improvement)

SILVER has the highest electrical and thermal conductivity of all metals. It has the lowest resistivity. Even the oxide of silver becomes a conductor. With silver-plating, Littelfuse Beryllium Copper Fuse Clips are brought to the greatest efficiency *in all factors.*

CONTACT RESISTANCE REDUCED APPROXIMATELY 20 PERCENT

Results for comparison have been obtained under severest conditions of actual service as well as many laboratory tests. Littelfuse *silver-plated* Be. Cu. clips consistently show this lowering of contact resistance, as against that of clean nickel or cadmium plating.

Oxides of all other metals are of high electrical resistivity. Silver plating practically eliminates the effects of oxidation. At extreme temperatures (300° C.) silver oxide film resolves, leaving a residue of pure silver. Silver sulphide, formed in high humidity, has much lower resistivity than sulphides of other metals.

ADDED TO ANTI-VIBRATION— STRENGTH—FATIGUE RESISTANCE

Characteristics of Littelfuse Be. Cu. Fuse Clips have long been familiar to engineers: extreme anti-vibration factor, high tensile strength, high modulus of elasticity, spring qualities equal to steel. Fatigue resistance is well above 40,000 p.s.i. Grip is triple that of the best phosphor bronze. Without silver-plating Littelfuse Be. Cu. Clips showed heat resistance up to 200° C.

Now with the use of silver their electrical conductivity is increased to the greatest practicable degree. Corrosion is no longer a factor. Extreme temperatures offer no problem. Strategic metals are conserved.

All Littelfuse Be. Cu. Clips are now silver-plated without extra cost to users, unless specifically ordered otherwise.

SEND FOR TECHNICAL BULLETIN

Full engineering data, drawings and tables on Littelfuse Be. Cu. Clips and Screw Terminals available on request. Write or wire

LITTELFUSE Incorporated

200 ONG ST., EL MONTE, CALIFORNIA 4757 RAVENSWOOD AVE., CHICAGO 40, ILLINOIS



The Attack Your Extra Bonds Must Back



Every penny counts — At FEDERAL, where communications equipment is made for our armed forces, an idea is spreading. For every axis plane reported shot down, employees drop an extra coin in a box — for extra bonds for extra bombs and bombers.

Thundering out of the overcast
Like a midnight express
The first wave of bombers
Spots the twinkling steel mill . . .
Blasts it into a roaring volcano
As the hinges of hell open
And fill the sky with daggers of light
And streaking, shrieking meteors of ack ack

Silhouetted against this inferno
Another target looms
And the young voice of the squadron leader
Speaking over the interplane radiotelephone
Calmly directs the *next* wave of bombers
To the doomed power plant ahead . . .

* * *

Shuddering under the impact
Of flak and fighter fire
The rocketing war birds
Level off into their "run"
And the pale bombardier catches his breath
Like he used to when he called signals
In the games back at "State"
As he whispers . . . *'Bombs . . . away!'*

Did he say *"bombs" . . . or "bonds"?*

* * *

Down they hurtle
The bonds
That have been converted into TNT . . .
Your milkman's bond
Your stenographer's bond
The bond of the woman who cleans your office
Of the neighbor whose boy was in today's battle
And YOUR bond . . .
Your EXTRA bond . . .
Is THAT there, too?

* * *

Here at I. T. & T.
And its associate companies
Communications equipment and services
Are only part of the job . . .
Every man and woman here
Is buying war bonds
Extra war bonds
To back the attack
And bring our sons and brothers
Home

I T&T INTERNATIONAL TELEPHONE AND TELEGRAPH CORPORATION *67 Broad St., New York 4, N. Y*
Manufacturing Associate:
FEDERAL TELEPHONE AND RADIO CORPORATION



A STOUT HEART

FOR D. C. AIRCRAFT MOTORS

*** KLIXON PROTECTORS



Motor limits don't mean a thing to a pilot with a Zero on his tail. He gives his plane the works. He's fighting for his life. Nothing else matters. So what happens?

One thing, the D. C. motors that operate the driving flaps, fuel pumps and other parts of the plane might be overloaded. And when they are overloaded too much, those motors burn out, *unless* those motors have a "Stout heart".


By a "Stout heart" we mean a built-in Klixon Protector which automatically recycles the motor . . . turns the motor off when it is too hot and turns it on again when it is cooled to a safe operating temperature . . . thereby preventing a burn-out and keeping the motor in action until our pilot gets his Zero and reaches his base in safety.



KLIXON PROTECTED MOTORS KEEP TRYING
when other motors quit

A Klixon Protected Motor is *good to the last grunt* and *then some.* It will give maximum power and will do everything any other motor will do *except burn out.* Insist on built-in Klixon Protectors with all D. C. Motors up to 30 volts.

SPENCER THERMOSTAT CO., ATTLEBORO, MASS.

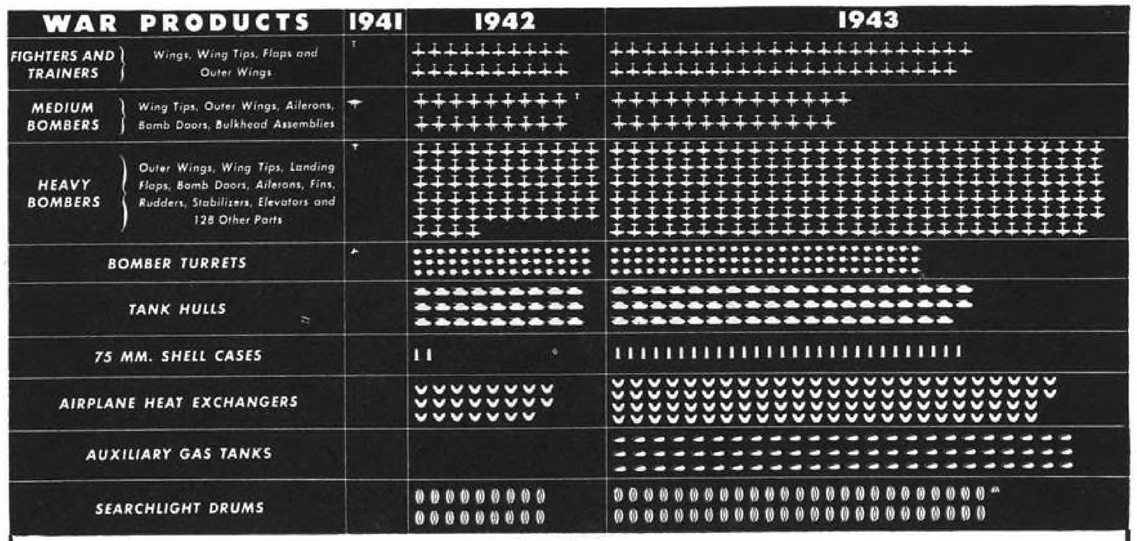

GROWTH OF BRIGGS WAR WORK

★ ★ ★

On all of its major war contracts, Briggs is up to or ahead of schedule! Since early in 1941, the range and volume of Briggs war products have constantly increased as shown by the above chart.

More than 22 million pounds of finished aircraft assemblies have been turned out by Briggs in two short years. Parts and sub-assemblies for seven war planes—ranging from trainers and fighters to heavy bombers—have been produced as follows: 800,000 pounds in 1941; 7,000,000 pounds in 1942; and 14,000,000 pounds in the first three-quarters of 1943.

PRODUCTION TREBLED

The monthly production rate on large bomber sections and medium bomber wings is three times greater than it was in the early months of this year. Another vital plane assembly is coming off the lines in double the quantity of 6 months ago.

Briggs started turning out deadly fire-power turrets for bombers at the end of 1941. By April, 1942, monthly production was in three figures. Today, Briggs is trebling that production each month! Despite the delays caused by turret model changes this year, shipments in the first 9 months of 1943 exceed those made during the entire year of 1942.

SHIPMENTS IN FOUR FIGURES

So far in 1943, Briggs has produced twice as many tank hulls as during all of 1942. Total production from the date of the original shipments is well up in four figures.

Aircraft heat exchangers are now being produced at a rate 300% higher than in the Spring of this year. Volume production has been attained, also, on auxiliary airplane gas tanks, a new Briggs war product developed entirely within the last few months.

September shipments of 75 mm. shell casings were the best in any month since the contract was undertaken, although new production techniques and tooling have been necessary to reach high-volume output.

PEAK PRODUCTION REACHED

Still another Briggs war product, searchlight drums, having reached a peak production early in 1943, is continuing to be manufactured on schedule.


Briggs Manufacturing Company is gratified that it has been asked to play such a large part in the Nation's war program. All of the resources, experience and facilities developed by Briggs in the peacetime production of automobile bodies and plumbing ware are pledged to the purpose of expanding war production to speed the day of victory.

W. O. BRIGGS
Chairman of the Board


W. P. BROWN
President

BRIGGS MANUFACTURING COMPANY
DETROIT



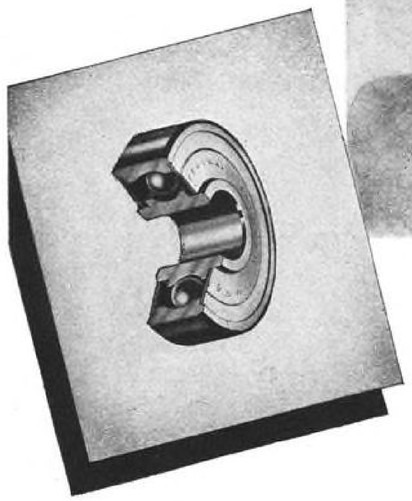


Federal aircraft BEARINGS

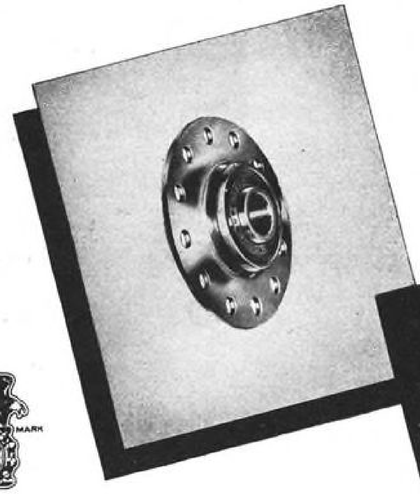

TRADE MARK

THE FEDERAL BEARINGS CO., INC.
Makers of Fine Ball Bearings
U. S. A.
REPRESENTATIVES LOCATED AT
Detroit: 2640 Book Tower • Cleveland: 402 Swetland Building
Chicago: 902 S. Wabash Ave. • Los Angeles: 5410 Wilshire Blvd.

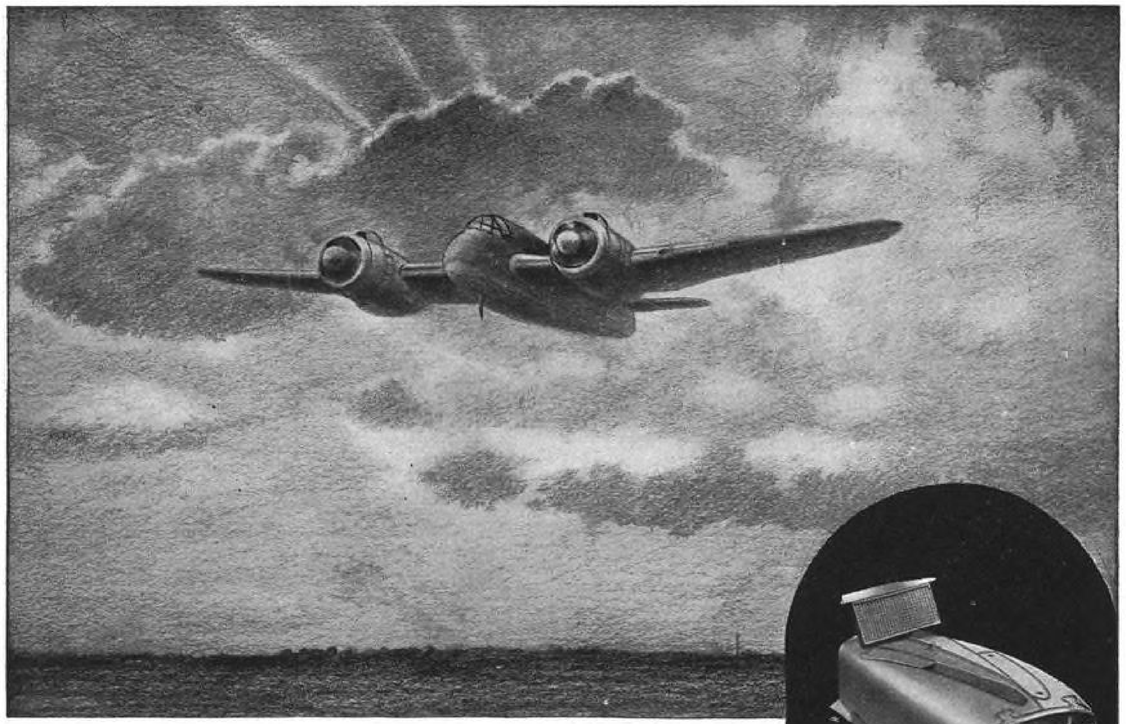

NIGHT FIGHTER . . .

WONDERFUL organisation by brains behind the scene, initiative, skill and courage of gallant men and—this must not be overlooked—superlative performance by aircraft, all combine to establish the R.A.F. supremacy in the air night and day. There must be no "margin for error" in the performance of high powered aero-engines! They must give immediate response to the pilot's demands, even under the terrific buffeting of battle conditions.

Even in the fiercest dog fight power and speed must be maintained. When engines are "fed" with air, oil and fuel oil free from impurities, they give of their best. That is why on night fighters, battle 'planes, indeed, all types of fighters, spotters, bombers, you will find Vokes Filters in operation. The 99.9 per cent. filtration efficiency claimed for Vokes Filters is not a mere laboratory test bench figure. Vokes Filters, we are proud to say, have proved their value to the fighting forces under the most gruelling battle conditions in the air and on land and sea.

• • •

TOP—VOKES AIR FILTER FOR AERO ENGINES.

CENTRE—VOKES OIL FILTER.

BOTTOM—VOKES FLAME TRAP SILENCER SPECIALLY DESIGNED FOR NIGHT FIGHTERS.


VOKES

VOKES LIMITED · FILTRATION EXPERTS

THE ARTHUR S. LEITCH CO. LTD., 1123 BAY STREET, TORONTO, CANADA
E. CANTIN, 101 PARK AVE., NEW YORK

Cool 'em with FANS



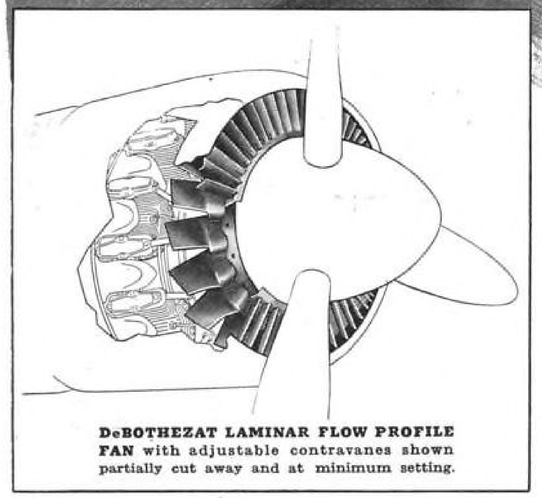

DeBOTHEZAT LAMINAR FLOW PROFILE FAN with adjustable contravanes shown partially cut away and at minimum setting.

OUT OF OUR DeBothezat laboratories for aerodynamic research now comes a new type laminar flow profile steel fan wheel adaptable to air cooled aircraft engine cooling. Chief features would be to provide: *adequate and controlled cooling at all air speeds with reduced cowl flap drag—and increased effective horsepower.*

This fan unit may consist of adjustable contravanes and a fan wheel mounted directly behind the propeller. The adjustable contravanes provide controlled cooling at varying flight conditions.

This new fan development is the product of the engineering staff that successfully solved the problem of blast-cooling radial air cooled aircraft engines which are virtually "buried" in U.S. tanks.

DeBothezat's modern aerodynamic laboratories are ably staffed with skilled technicians experienced in solving numerous difficult engine cooling problems.


A M M AND F INC. ARMY NAVY

De Bothezat Division of

American Machine and Metals, Inc.

East Moline, Illinois

INVINCIBLE

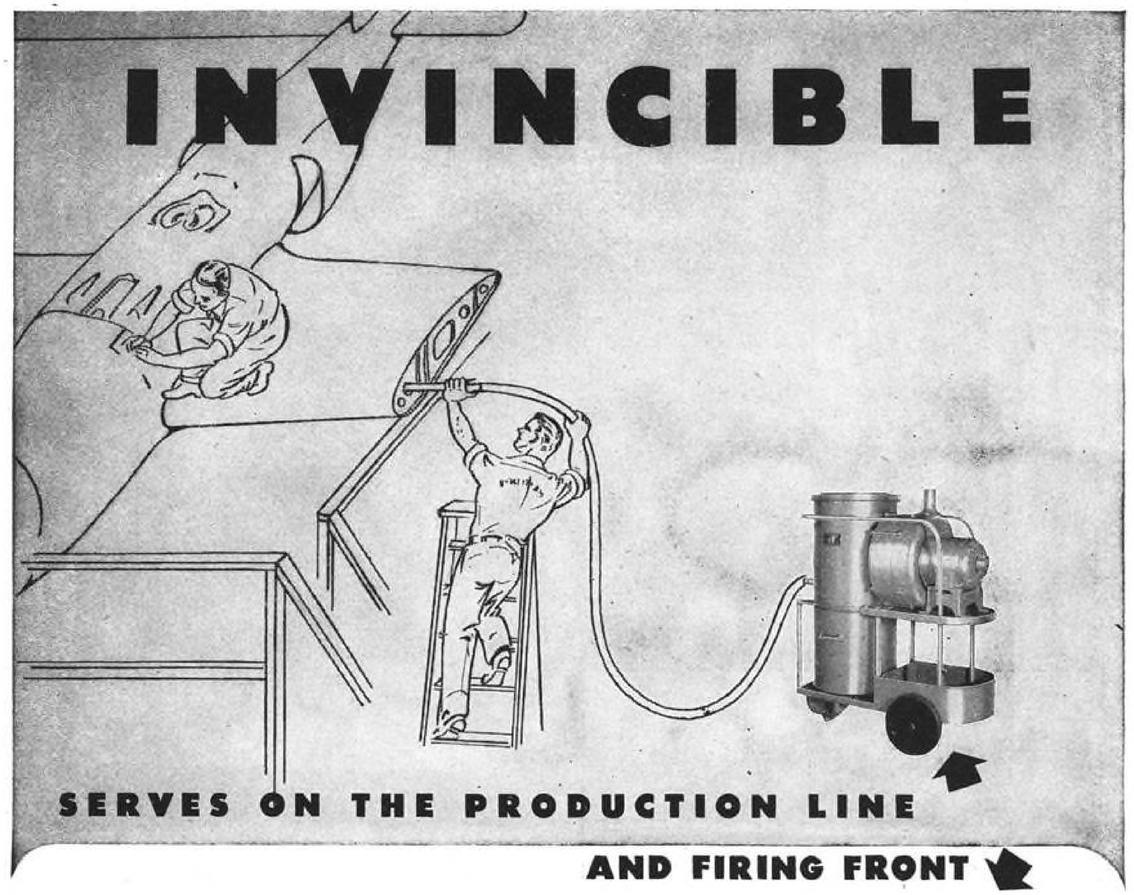


SERVES ON THE PRODUCTION LINE

AND FIRING FRONT

AIRCRAFT manufacturers confronted with removal of grindings, bolts, nuts, rivets, etc., from interior recesses of wings and fuselages, use Invincible portable, heavy-duty suction equipment to solve this problem, and thereby speed production and salvage material.

Invincible units readily remove water and litter from shipholds under conditions that clog sump pumps. In the welding industry Invincible vacuum equipment recovers unfused flux, thus lowering costs and saving man hours.

These are but a few of many examples of Invincible service to industry—speeding production, removing waste, recovering materials. Without obligation, an Invincible engineer will consult with you on problems of this nature.

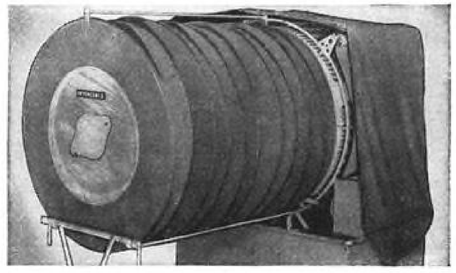

★ The Army Air Forces asked us to develop a special Air Filter to provide dust-free air for drying films taken by photo-reconnaissance planes. Applying our long experience with vacuum equipment, Invincible engineers solved this problem with the compact Air Filter illustrated above. This filter operates efficiently under the difficult climatic conditions encountered in war areas.

BUY U. S. WAR BONDS AND STAMPS

INVINCIBLE VACUUM CLEANER MFG. CO.


DOVER, OHIO

FOR 35 YEARS, LEADERS IN INDUSTRIAL VACUUM EQUIPMENT



The next time you're in

MIAMI



We'd like very much to welcome you, here at Embry-Riddle. We'd like to take you on an informal tour of the School—to show you the laboratories, the workshops, the classrooms—to have you meet our staff of instructors—to see the type of men and women who are enrolled with us.

As today's leaders in the Aviation industry, one of your important responsibilities lies in bringing the right kind of workers into your organizations in the future—the kind that can be developed to carry new responsibilities as the needs arise. That's the kind we're trying to train here in Miami.

We're confident that the more you know about us and our methods, the more importance you'll attach to the man or woman who says, "I trained at Embry-Riddle". ★ ★ ★

Until you can visit us in person, we'd like to send you a "get acquainted" booklet which gives the highlights of the school. Write us for your copy. Dept. 142

Embry-Riddle

SCHOOL OF AVIATION

Miami 30, Florida

"Heli-Coil" SCREW THREAD INSERTS



SAVINGS PLUS!

THE NEW WIRE INSERT

The "Heli-Coil" Bushing of stainless steel or phosphor bronze wire engages screw threads of the American National System. Protects tapped threads in light metals and plastics against abrasion, seizing or galling.

THE OLD HEAVY BUSHING The solid screw bushing is heavy and bulky. It, therefore, tends to restrict design. Internal and external threads are sometimes not concentric.

Aircraft engine builders and many other manufacturers save valuable man-hours through the use of "Heli-Coil" Screw Thread Inserts in three ways:

1. **They can be installed in one-quarter the time required for solid screw bushings.**
2. **They speed up maintenance, because they can be removed and replaced quickly in the field.**
3. **They can be manufactured four times as fast as solid bushings.**

"Heli-Coil" Inserts provide a quick, simple and inexpensive method of protecting tapped threads in aluminum, magnesium and other materials, against abrasion, stripping, seizing or galling. They also render important service in salvaging parts containing tapped threads that have stripped or worn oversize.

Send for Bulletins 237 and 238.

WITH "Heli-Coil" INSERTS YOU SAVE . .



TIME

Can be installed with simple hand or power tools in one-fourth the time required for solid screw bushings.



WEIGHT

Weighs one-fifth as much as the screw bushing of the same diameter.



SPACE

Occupies less than half as much cross sectional area as solid bushing, permitting more latitude in design.



METAL

Made from precision-shaped wire with no waste, requires about one-tenth as much metal as solid bushing made from bar stock.


THE SCREW SYSTEM WITH THE ANTI-FRICTION THREAD LINING.

U. S. and Foreign Patents Issued and Pending.

AERO-THREAD

AIRCRAFT SCREW PRODUCTS COMPANY, INC.

47-23 35th STREET • LONG ISLAND CITY, 1, N.Y.

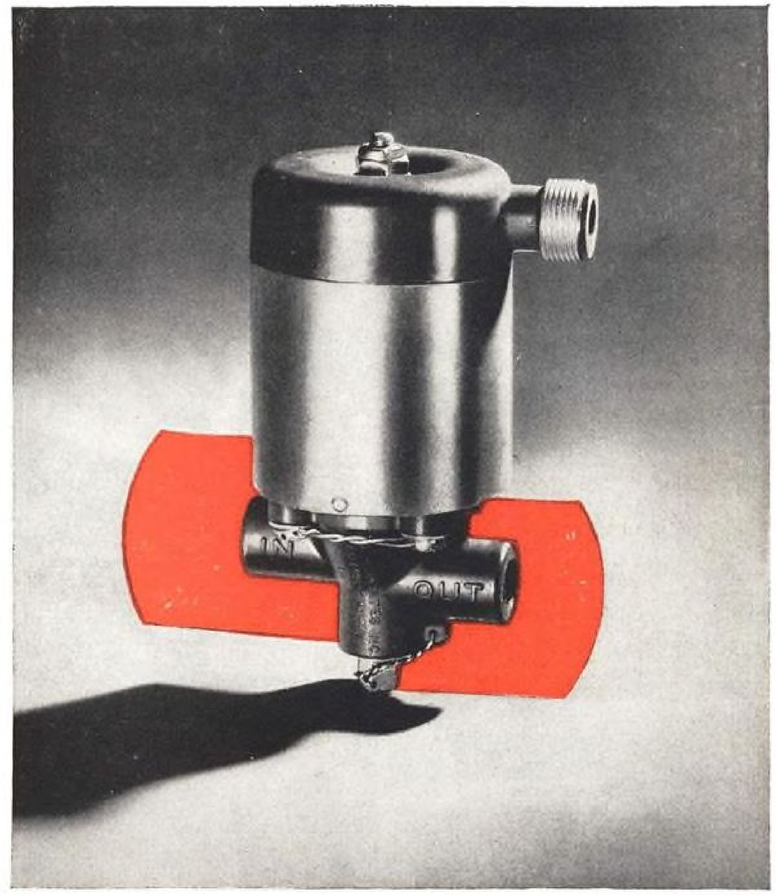


OIL DILUTION SYSTEM ASSEMBLIES

Air Associates manufactures all units used in the oil dilution system, including Solenoids—Type AC 37D6210 (to latest change) and Air Associates Type M-441-M2, which has special features and is standard equipment on many airplanes . . . AN 4077-1 Twin Restricted Tube Fitting (supersedes AC37A3528 Fitting) . . . and also a complete line of Y Oil Drains in all standard Air Corps and special types. *Present production schedules permit early delivery of oil dilution system assemblies on new orders* . . . These are but a few of the many dependable products Air Associates engineers and manufactures . . . or supplies to the aircraft industry. Inquiries invited.

AIR ASSOCIATES, INC.

TETERBORO, N. J. . . . *BRANCHES:* CHICAGO, DALLAS, LOS ANGELES . . . ENGINEERS & MANUFACTURERS OF AIRCRAFT SPECIALTIES . . . SUPPLIERS OF ALL TYPES OF MATERIALS TO THE INDUSTRY SINCE 1927

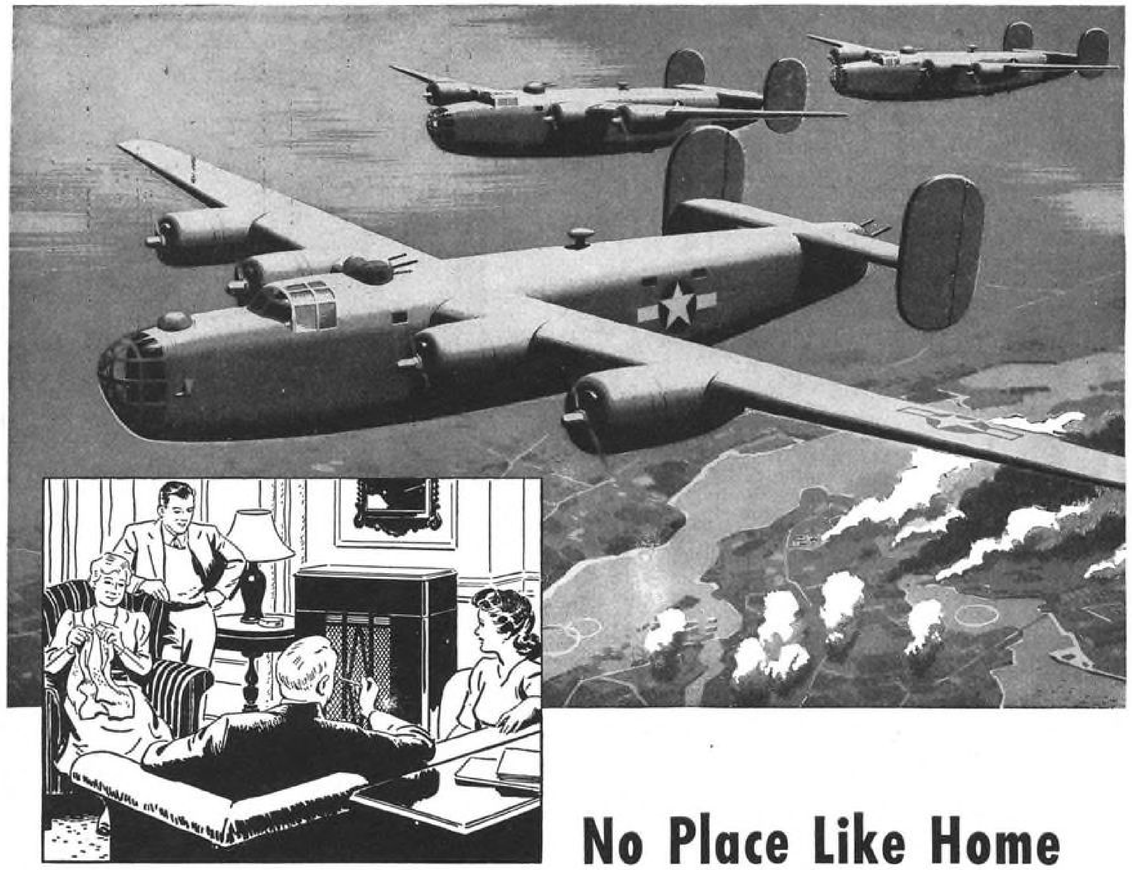

No Place Like Home

Compared with the typical home radio set —protectively nestled in a quiet living room —the electronic devices on a bomber lead a dog's life. Their delicate parts are subjected to the jarring concussion of exploding flak—the "kick-back" of bursting block-busters—the vibration of roaring motors and firing guns . . . a mauling severe for even the most rugged parts.

How these sensitive instruments are able to hold up under such bruising punishment is a story that dates back to the early days of automotive radio. Technicians of Delco Radio faced parallel problems—vibration, electrical interference, temperature and humidity extremes, bumping and jarring. They faced a set of conditions totally new and different in the radio field—the special conditions attending "radio in transit."

One by one, these problems fell before the forces of research, experiment, ceaseless testing and trying. Automotive radio became a practical, workable reality. And with success in this endeavor came a fund of special experience, off-the-trail knowledge, that has come in mighty handy in World War II. For Delco Radio engineers have applied their experience in automotive radio to the task of giving the forces of freedom—on land, at sea, in the air—a strong, clear voice. Delco Radio Division, General Motors Corporation, Kokomo, Indiana.

Back Our Boys By Buying Bonds!

Delco Radio
DIVISION OF
GENERAL MOTORS

"We are enthusiastic over the way SPEEDI-DRI is cleaning our floors,"
writes
Don M. Sawyer, Personnel Manager
BLISS & LAUGHLIN, Inc.
BUFFALO, N. Y.

Among our many unsolicited letters of praise for SPEEDI-DRI is one from Bliss & Laughlin, Inc., makers of cold-finished steels and shafting, in which they say: "We attempted to clean up the oil and dirt with soaps and powders but none was satisfactory. But after only one application of SPEEDI-DRI, the oil and dirt have been practically eliminated and the clean concrete is once again showing up. We were skeptical, at first, that SPEEDI-DRI would clean our floors and also provide a firm footing. Now there is absolutely no doubt in our mind that it does both jobs."

There'll be no doubt in *your* mind, either, once you try this remarkably effective product that soaks up oil and grease, retards fire, saves workmen's shoes from oil rot, improves employee morale (especially among women workers), brightens up the shop, cuts the cost of housekeeping and conserves vital manpower by saving on materials and labor, and helps to reduce insurance rates by cutting down slipping and falling accidents. That's a lot for one product to do, but SPEEDI-DRI does it!

Try SPEEDI-DRI in *your* plant. Prompt service from warehouses in leading cities. Unlimited, priority-free supply.



Ask for demonstration or free sample. If water or water-soluble oils are used, request SOL-SPEEDI-DRI.

SPEEDI-DRI
OIL AND GREASE ABSORBENT

SUPPLIERS

East
REFINERS LUBRICATING CO.
New York 1, N. Y.

Midwest and South
WAVERLY PETROLEUM PRODUCTS CO.
Philadelphia 6, Pa.

West Coast
WAVERLY PETROLEUM PRODUCTS CO.
Russ Building, San Francisco 4, Calif.

Prompt Service from Warehouse Stocks in Leading Cities

BELL AIRCRAFT TESTED
LOXIT SKIN FASTENERS



PHOTOGRAPH COURTESY BELL AIRCRAFT CORP.—SHOWING ACTUAL APPLICATION

FOUND THEM SAFER, FASTER, EASIER TO USE...



Test it . . . as Bell did . . . you too will find it worthwhile

THE LOXIT SKIN FASTENER . . . was recently tested by laboratory technicians at Bell Aircraft, makers of fast P-39 Airacobras, and *found to fulfill all our claims.*

SAFER . . . A higher safety factor, specially appreciated by women workers, is assured by special design and rugged construction. Hardened steel body shell and heat-treated plunger reinforced by tubular sleeve, mean long life and economy as well.

FASTER... LOXIT Skin Fasteners need to be compressed only at moment of application. Motion studies show that the resulting 75% saving in worker-fatigue speeds skin fastening by 10%.

EASIER TO USE . . . Simply line up skin holes, using fastener's tip as guide. Compress the fastener, and — snap! — it's in. Being smaller, LOXIT Skin Fasteners are also easier to handle at close quarters, especially near right angle bends.

FREE SAMPLES

A request on your business letterhead will bring you LOXIT Skin Fasteners for your testing. You'll find it fits any standard type pliers or gun. Write today.
Scovill Manufacturing Company, 20 Mill Street, Waterbury, Connecticut

LOXIT SKIN FASTENERS
SPEED THE JOB
... A SCOVILL PRODUCT

NORTH AMERICAN



RBC AIRCRAFT SERIES—#13
NORTH AMERICAN P-51
MUSTANG FIGHTER

uses

RBC
NEEDLE BEARINGS

Designed entirely on the basis of combat experience, this P-51 Mustang is called the "plane without a mistake". As it was planned for speedy production, easy maintenance and serviceability, RBC Aircraft Needle Bearings with high radial load carrying capacity and small compact size, were the logical choice to accomplish those objectives by providing ease of installation, minimum wear on vital moving parts and peak operating efficiency.

ROLLER BEARING CO. of AMERICA
TRENTON . . . . NEW JERSEY

MAKING THE WORLD'S FINEST STANDARDS

1899
1943



● SHOP WHERE HJALMER ELLSTROM DEVELOPED THE ORIGINAL GAGE BLOCK.



ORIGINATED (The only major improvement since the development of the original gage block.)



A Family Tradition

The manufacture of gage blocks has become a family tradition with the Ellstrom family. Elmer Ellstrom, the founder of the Dearborn Gage Company, worked as an apprentice to his father, Hjalmer Ellstrom when the latter worked on the development of the gage block. This apprenticeship was served from 1899 to 1904 at which time his father worked in the tool room of the great Swedish Arsenal in Eskilstuna and Fagersta where the finest grade of steel known is made. With this steel at his disposal, the elder Ellstrom contributed to the development of the steel analysis which permits the stability required in gage blocks.

Together with this development a process of seasoning steel was discovered as well as an instrument for checking dimensions in degrees of accuracy. So effective were these discoveries that to this day they have no equal in reliability and precision.

After having spent his early years in the very birthplace of precision measurement, Elmer Ellstrom desired more experience in methods used in the steel-working industry and in 1904 came to the United States where he found employment with large manufacturers in this country, such as Westinghouse, Mesta Machine Company, Joseph Bullard Company and the Martin Bomber Company.

With this wide experience as a background, Elmer Ellstrom began his own company in 1936 and with the assistance of his three sons, Ralph, Olof and Elmer, he has built the Dearborn Gage Company into a recognized leader in its field.

Yes, the manufacture of gage blocks is truly "a family tradition" with the Ellstrom family and it is undoubtedly the reason why Dearborn Chromium Plated Gage Blocks are known for their superiority throughout the world.







DEARBORN GAGE COMPANY 22038 BEECH STREET DEARBORN, MICHIGAN

Originators of Chromium Plated Gage Blocks



No, these are not Russian or Polish war orphans They are right here at home. Their father, who was an automobile mechanic, is in Europe now, repairing American tanks. Their mother is in a war plant. Every night they sit here and wait her homecoming — and dinner Your dollars can support playgrounds, equipment and care for them through one of your local welfare agencies. Would you rather have a new evening gown?

Let your heart decide



A merchant seaman has been dragged back to life from an ocean of flaming oil. He has lost all of the little possessions that sailed with him. He is given warmth and comforts and strength to fulfill his desire to "ship" again by your dollars. Would you rather have bought a new radio?

Let your heart decide

Let your heart decide

DOLLARS can be cold and selfish things. Or they can be generous, compassionate and merciful.

Turn over the spending of some of your dollars to your heart. It will want to give twice what your logical mind intended to give, because your heart understands the mercy, the relief and the pleasure that these dollars bring.

Let your heart decide.



This Chinese baby didn't have much, but yesterday it did have a straw shelter, a crude cradle and two parents to care for it. A screaming Japanese bomb destroyed them all. Your dollars can bring this baby back to a useful life in the new China to come. Would you rather have a new chair in the living room?

Let your heart decide



Remember this soldier? You saw him on the USO posters last year. His smile comes straight from a USO clubhouse. One of the finest things civilians have done in this war is in building and supporting the USO. Boys come into the army from farms and cities—a little lonely—a little homesick. The USO provides friendship, entertainment and hominess. Some of your dollars are spent through the USO. Would you rather have bought yourself a few theatre tickets?

Let your heart decide


Give ONCE for ALL these

- USO
- United Seamen's Service
- War Prisoners Aid
- Belgian War Relief Society
- British War Relief Society
- French Relief Fund
- Friends of Luxembourg
- Greek War Relief Association
- Norwegian Relief
- Polish War Relief
- Queen Wilhelmina Fund
- Russian War Relief
- United China Relief
- United Czechoslovak Relief
- United Yugoslav Relief Fund
- Refugee Relief Trustees
- United States Committee for the Care of European Children

National War Fund

Give through your United Community Campaign

THIS SPACE CONTRIBUTED BY THE B&G CORPORATION

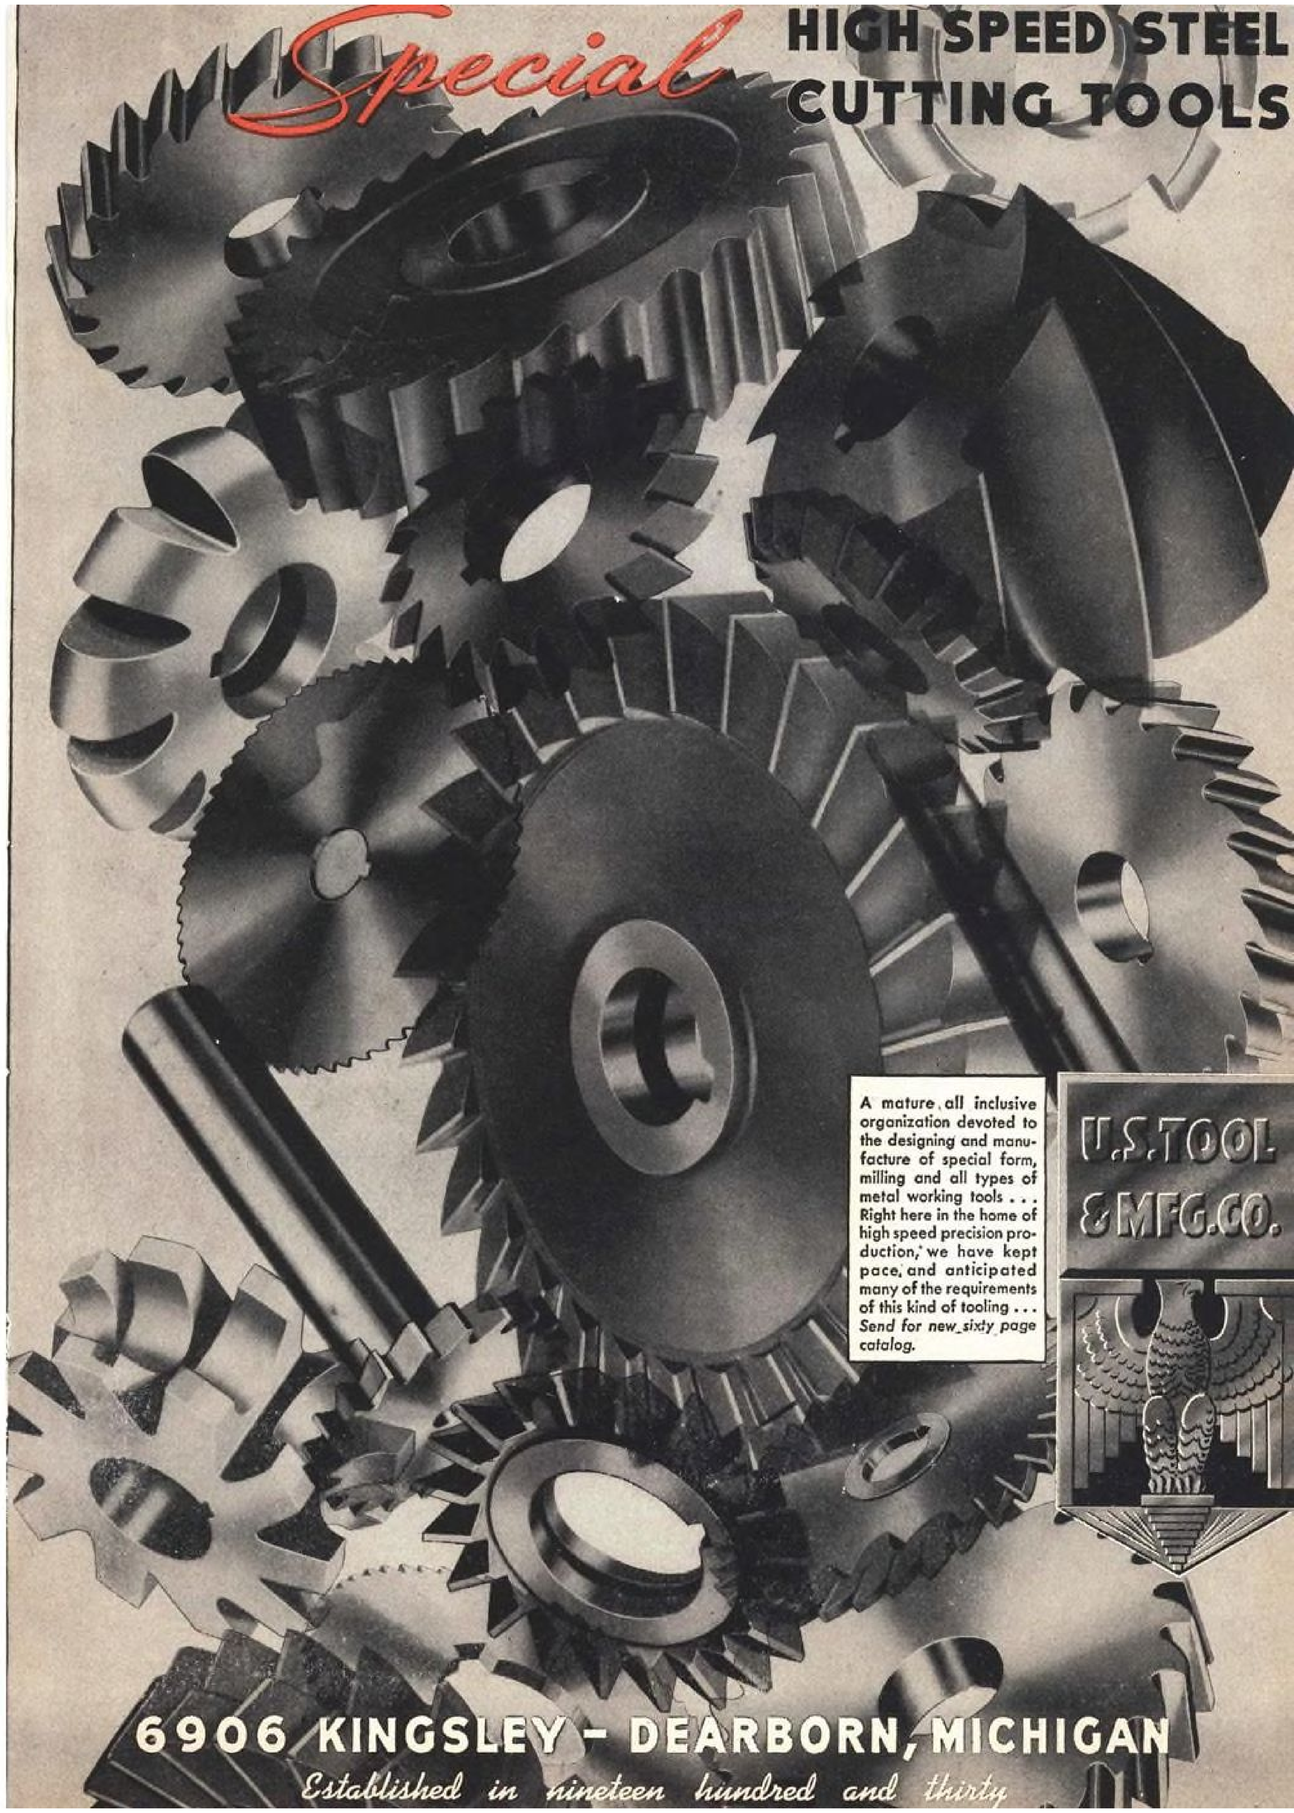


Albanene

REG. U. S. PAT. OFF.

the Stabilized

TRACING PAPER



★ **STABILIZED** to keep its toughness and transparency — that's Albanene Tracing Paper. Because it is treated with crystal-clear Albanite, a new synthetic solid developed in the K&E laboratories—Albanene will not oxidize, become brittle or lose transparency with age. Albanene's improved drawing surface takes ink or pencil fluently, erases with ease . . . Ask your K&E dealer.

TRADE MARK K+E

KEUFFEL & ESSER CO. *Est. 1867*

CHICAGO • **NEW YORK** • **HOBOKEN, N. J.** • MONTREAL
ST. LOUIS • SAN FRANCISCO • LOS ANGELES • DETROIT

No. 1 in a Series of Factors Essential to Maximum Brush Efficiency.

Minimum energy loss is vital in brush operation...



There is more to efficient brush operation than the mere collecting of current. The grade chosen must have the lowest contact drop, frictional loss and resistance consistent with good commutation.

Selection from the all-inclusive Morganite line of electro-graphitic, graphite, carbon and metal-graphite brushes, plus grades especially developed for difficult machines, is your assurance of maximum efficiency.

MORGANITE engineers are available for collaboration. Literature, pertaining to MORGANITE Brushes or Carbon Specialty facilities, will be sent promptly on request. Write to Morganite Brush Company, Inc., Long Island City, New York.

TRADE MARK

MORGANITE BRUSHES

Announcing

NEW



hi-g

TRADE MARK

TEMPERATURE CONTROLS FOR AIRCRAFT

Our engineers have perfected a new line of *hi-g* temperature controls for operating flaps on airplanes.

Operating hydraulically, these controls give instant, automatic response on either liquid or air cooled motors.

The efficiency and reliability of the new *hi-g* controls have been proven by exhaustive tests on both commercial and combat planes.

These new controls not only reduce the human element in plane operations but retain all the *hi-g* advantages. They operate in any position, regardless of vibration, change of motion or acceleration.

This new line offers equal advantages to the designer and manufacturer of post-war aircraft. We invite your inquiries. If you have a temperature control problem, write us.

GENERAL G/C CONTROLS

Wartime Manufacturers of Electro-Magnetic and Temperature Controls for Aircraft • Peacetime Producers of Automatic Pressure, Temperature, and Flow Controls

801 ALLEN AVENUE, GLENDALE 1, CALIFORNIA
BOSTON • NEW YORK • PHILADELPHIA • DETROIT
CHICAGO • CLEVELAND • DALLAS • DENVER • SAN FRANCISCO

TIMBER STRUCTURES INC.

Announces the Acquisition of

THE SPEEDWALL COMPANY

Formerly owned and operated by I. F. Laucks, Inc.



SPEEDWALL PLANT, 5038 First Avenue, Seattle, Washington.

TIMBER STRUCTURES, *Inc.* pioneers in prefabricated wood trusses, arches and columns for aviation housing, extends its field of service through the purchase and expanded operation of the Speedwall Company, Seattle, Washington, formerly a property of the I. F. Laucks Company.

The Speedwall Division of Timber Structures, Inc. will continue to bring to the field of aviation scientifically glued laminated spars, longerons and other aircraft parts. Write or wire your production inquiries to the nearest Timber Structures office.


•


TIMBER STRUCTURES, Inc.

535 Fifth Ave, New York 17, N.Y. — 29th and N.W. Yeon Ave., Portland 8, Ore. — 5038 First Ave., Seattle, Wash.

Warehousing and crating facilities at Trenton, New Jersey

TIMBER STRUCTURES PLANT, Portland, Ore. *(below)*. Located in the heart of the nation's structural timber area. Yearly production in excess of 80 million board feet of prefabricated lumber. . . . Other plants at strategic points.

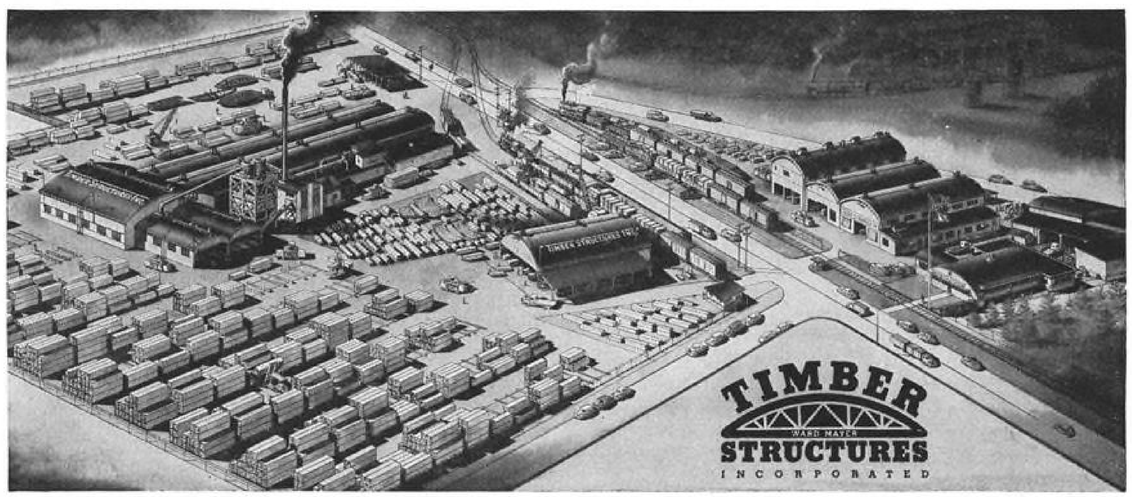

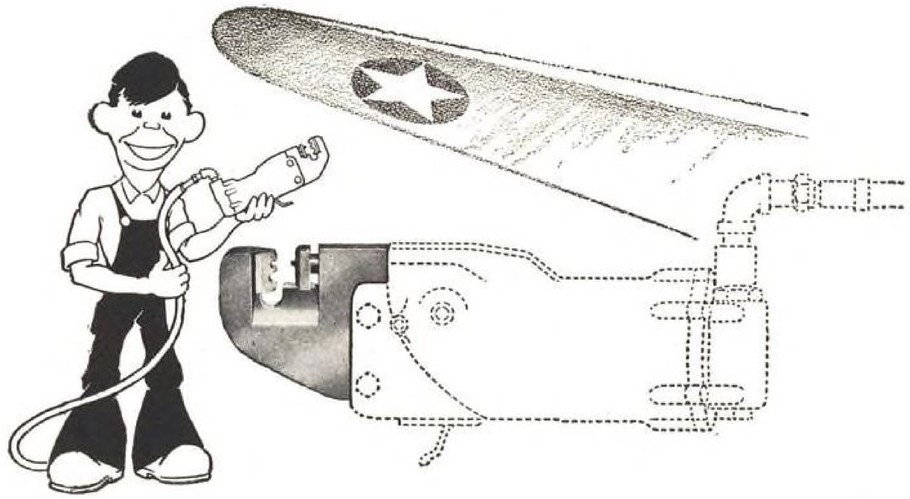

QUICK LIKE A TRIGGER

New T&B Air-Powered Hand Tool for Installing STA-KON* Terminals on Small Wires, sizes #22 to #10 Aircraft

The operation of this new tool is as easy as pulling a trigger. The T&B high speed installing head is an accessory made for any of three standard makes of compression hand riveters. The staking nest in the head is pivoted. In one position it installs A and B series Sta-Kons* (wire sizes #22 to #14 Aircraft). In the other position, C Sta-Kons* (wire sizes #12 to #10 Aircraft).

This latest addition to the T&B Line of Sta-Kon* Pressure Tools makes permanent connections fast—electrically and mechanically perfect. Portable, light in weight, compact in design, this tool is easily operated by inexperienced hands. Especially useful for work in crowded quarters.

Many other T&B Sta-Kon* Tools are available for any power you may prefer: Manual, Electric, Air or Hydraulic. They include among others: rapid action bench tools for harness assemblies and mass installations, small, neat hand tools, and heavy-duty portable tools that can be wheeled from job to job. Every T&B Sta-Kon* Tool makes installations approved by the various branches of the armed forces, and other specifying authorities.

For complete engineering data on T&B Sta-Kon* Tools and Terminals write for Bulletin 500, or Aviation Catalog 36—or both if you wish.

*STA-KON Registered U. S. Patent Office.

THE THOMAS & BETTS CO.

INCORPORATED

MANUFACTURERS OF ELECTRICAL FITTINGS SINCE 1899

ELIZABETH 1, NEW JERSEY

In Canada: Thomas & Betts Ltd. Montreal


LIFE PRESERVER *for* AIRPLANES

A *clean* automatic hydraulic system is absolutely essential to the safety of planes and of the men who fly them. Should dirt or dust clog its valves, landing gears would jam, wing flaps would fail to move, gun turrets would be unable to turn.


That's why the Purolator hydraulic oil filter is literally the life preserver of the modern war plane. Its job is to trap and remove all foreign matter—even the smallest particles—before damage can be done. In every part of the world it has an unimpeachable record of keeping hydraulic fluids safe by keeping them clean of impurities.

In addition to hydraulic oil filters, Purolator also manufactures highly efficient air filters for vacuum operated aircraft instruments, and a complete line of lubricating oil filters. Write for Purolator's "Aviation" Catalog. Purolator Products, Inc., Founder and Leader of the Oil Filter Industry.

Home Office.....Newark 5, N. J.
Detroit Office.....609 Fisher Bldg.
California Office. 1401 S. Hope St., Los Angeles

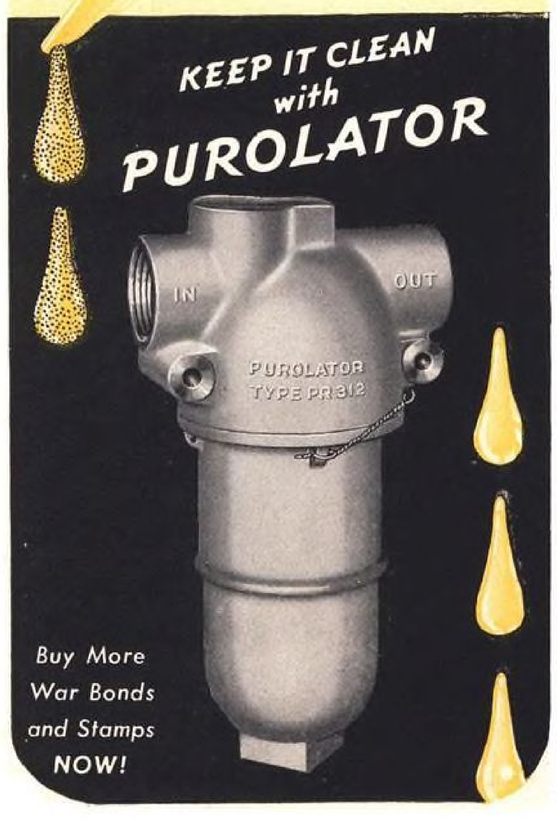

POTENTIAL ENGINE TROUBLE

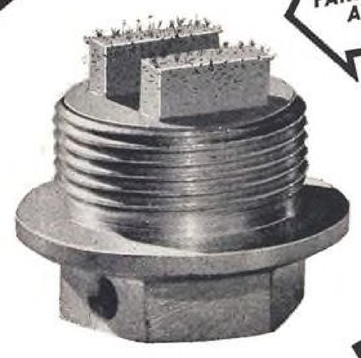

REVEALED BY A MAGNET!

Unusual wear in an aircraft engine often causes abrasive metal particles to be thrown into circulation in the oil. Such wear, unless discovered *in its early stages*, may lead to serious trouble.

Lisle Magnetic Drain Plugs provide a practical, easy way to remove these metal cuttings as fast as they appear. A powerful magnet in the Lisle Plug catches and holds the iron and steel particles, thus keeping the lubricant free of metal abrasive; and warning—*before trouble occurs*—of unusual wear in the engine.




Catalog and engineering data sent free on request. Write.

Lisle Corporation
BOX 1020
Clarinda, Iowa


ARMY E NAVY

Lisle Magnetic **DRAIN PLUGS**

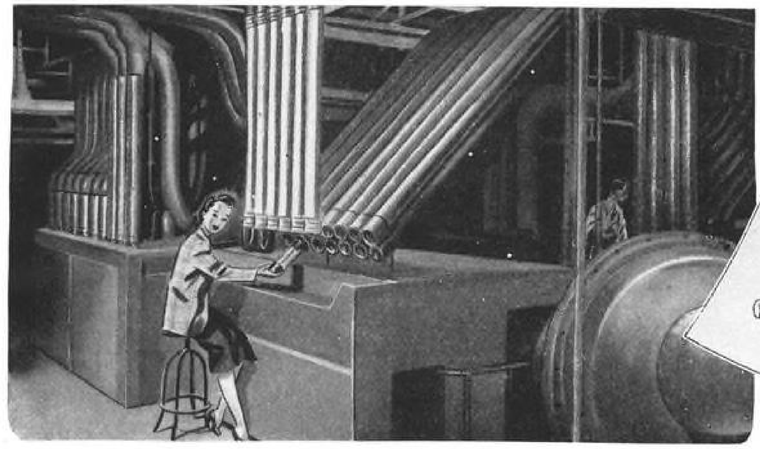

CARRIERS OF MESSAGES BY AIR

..CONVEYORS OF HEAVY STEEL COILS

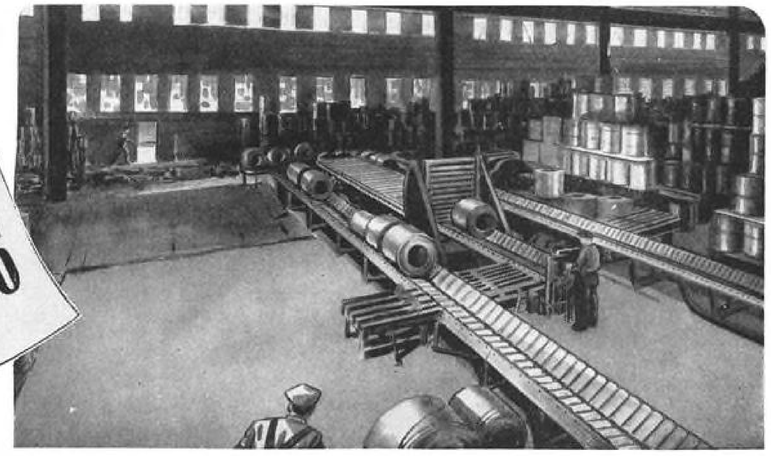

Standard Conveyor Engineers Have the Engineering Skill and Manufacturing Facilities to Build For a Variety of Needs

One of the largest and most notable pneumatic tube systems ever built — serving 27 departments at Bell Aircraft with swift transmission of important papers—is an outstanding example of Standard Conveyor engineering and manufacturing ability.

A complete roller conveyor system for the handling of heavy sheet-steel coils, weighing several tons each, in a large eastern mill is another noteworthy Standard Conveyor installation.

These highly diverse examples are indicative of Standard Conveyor engineering versatility and manufacturing skill. An experience record of more than 35 years, serving all classes of industry and business, qualifies Standard Conveyor to be of service to your company — on any conveyor requirement, large or small, for immediate or future handling needs.


• • •

Write for valuable reference book—"Conveyors by Standard"—Catalog No. A-11.

STANDARD CONVEYOR COMPANY
General Offices: NORTH ST. PAUL, MINN.
Sales and Service In All Principal Cities



★ ENGINEERED FOR FASTER PRODUCTION ★

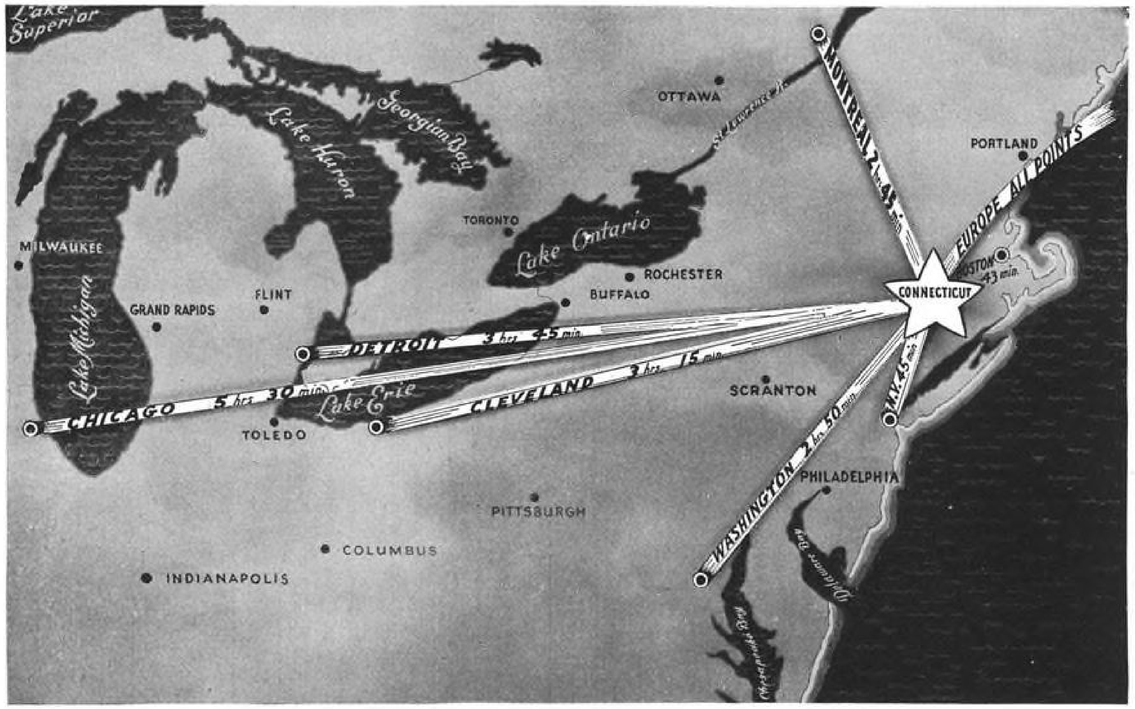

Forecast of postwar air terminal in Connecticut

PLAN YOUR FUTURE IN THIS "CENTER OF AVIATION"

Manufacturers of aviation products and airline executives! Future-minded CONNECTICUT is already geared and set to lead the way in the peacetime expansion of your industry. Already, many of the industry's biggest names operate in this State. Already, CONNECTICUT is out ahead in the development and manufacture of airplane engines, propellers, and many other important aviation parts and products. Already here work the industry's most skilled mechanics. And here, even now, plans are underway for one of the world's greatest, most strategically located airports . . . a great home "port" for America's globe-circling air carriers . . . a "port" to be ideally "serviced" by four-lane motor highways, by ample rail and salt-water shipping routes. Think what a head start all this gives to the aviation manufacturer located within this State! A State with no personal income tax! With no State sales tax! With a balanced economy and a balanced budget! For complete information, send today for *free* booklet, "CONNECTICUT . . . Center of Aviation." Address Dept. 401, Connecticut Development Commission, State Office Bldg., Hartford, Conn.

Other Quick Facts about Connecticut

- More than 2,000 diversified industries.
- Next door to America's largest market normally consuming 37% of all manufactured products.
- 24,000 high revenue farms second in Nation's acreage value.
- Majestic hills, valleys, 7,000 miles of streams and rivers, 1,000 lakes, many miles of sea beaches.

LOCATE IN Connecticut CENTER OF AVIATION



. . . but "FEET" on the ground

The pilot of a plane no longer fights his battles alone. His two-way radio keeps him constantly in touch with headquarters, permits the split-second coordination that makes possible thousand-plane squadrons.

Miles and miles of wire thread every plane . . . play a vital part in its control and operation. Wire for the "inter com," wire for ignition and electrical systems, wire that relays the condition of engine and fuel, each must function faultlessly. So dependability is a "must" in every type of wire and cable manufactured to meet the rigid demands of wartime aviation.

Complete details are available—in Form No. 838 covering low tension cable; in Form No. C-503 covering Steelductor cable, the high tension wire now used in the majority of America's fighting and bombing planes. If you have need of wire for aviation use, make sure these bulletins are in your file.

SARNIA, ONTARIO — THE ELECTRIC AUTO-LITE COMPANY, *Wire Division* — PORT HURON, MICH.

AUTO-LITE AIRCRAFT WIRE and CABLE

IN ITS 26 GREAT MANUFACTURING DIVISIONS, AUTO-LITE IS PRODUCING A LONG LIST OF ITEMS FOR AMERICA'S ARMED FORCES ON LAND, SEA AND IN THE AIR

BRAKES THAT SAY...

"Whoa" and MEAN IT!




The New "B-711"

Developed by Scott engineers to surmount certain disadvantages of light aircraft hydraulic brake systems, the improved Scott "B-711" Brake Pressure Unit brings unusual efficiency and dependability to braking operations. Quick response and positive action is assured at all times due to their special pressure-tight construction. Scott Pressure cylinders are designed for expander and other types of hydraulic brakes. Readily installed, and located with pedals in conventional relationship to the rudder pedal. These units are simple in design, durably built, light in weight (only 21 ounces). Each unit is exactingly tested. Economically priced. Write for illustrated folder.

Scott AVIATION CORPORATION
LANCASTER, N. Y. U.S.A.
DESIGNERS AND MANUFACTURERS OF SPECIAL EQUIPMENT FOR THE AIRCRAFT INDUSTRY

BRAKE PRESSURE UNITS for Hydraulic Systems

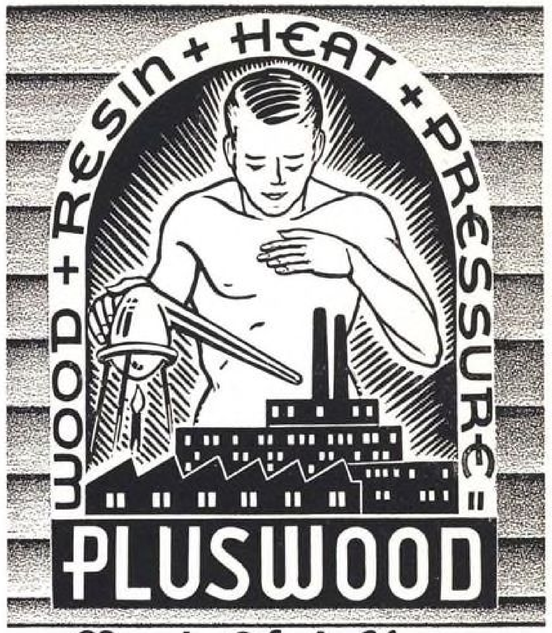

Mark Of A New Engineering Material For Aviation



Britain's de Havilland Mosquito bombers are now using birch veneer made by Pluswood.


A Wood Alloy with an Exciting Weight-Strength Ratio

● Designers of aircraft will find in Pluswood a stimulating material of fixed engineering description that offers many applications right across the drawing board. High in aesthetic values for exterior appearances and effects, Pluswood is far lighter than aluminum, yet provides a structural strength that compares favorably with heavier metals.

A non-conductor, this new wood alloy has amazing properties of density and toughness. It is highly resistant to fire and abrasion, possesses a beautiful high gloss surface that never needs any care or attention. A material of great dimensional stability, Pluswood is practically impervious to moisture, swelling, shrinking, thermal shock, or corrosion. To your order, this wonder material can be made thick or thin, pliable or rigid to predetermined strength—and you can have it in sizes ranging from fractional inches to blocks up to 7' x 18' x 16" in thickness.

A dependable, responsible organization stands behind Pluswood from forest through saw mills, veneer mills and factory—established by the Lullabye Furniture Corporation, since 1897 America's foremost manufacturer of juvenile furniture. Pluswood maintains a laboratory service that you are urged to use, without obligation. Write now for an engineering bulletin that may help your thinking.

PLUSWOOD Inc. Oshkosh Wis.
Associated Companies
NORTHERN HARDWOOD VENEERS, Inc., Butternut, Wisconsin
LULLABYE FURNITURE CORPORATION, Stevens Point, Wisconsin
ALGOMA FOREST PRODUCTS, Ltd., Bruce, Ontario, Canada



Gulf Super-Quench
solves another heat-treating problem—

Here are the results on gears of a prominent machine tool manufacturer:

1 Gear hardness increased from 35 Rockwell C to 44 Rockwell C

2 Soaking time in cleaning bath reduced from 30 minutes to 5 seconds

3 Hand brushing and cleaning operation eliminated

4 Substantial increase in production

You tap a new source of greater production efficiency when you put this revolutionary new quenching oil on the job in your plant

A large machine tool manufacturer, securing only 35 Rockwell C hardness on spur gears with a conventional quenching oil, adopted the recommendations of a Gulf Service Engineer to use Gulf Super-Quench.

This revolutionary new quenching oil quickly demonstrated its super quenching power. Rockwell C hardness was increased to 44. In addition, bath cleaning time was reduced from 30 minutes to 5 seconds—and a subsequent hand cleaning operation was eliminated. Another tough heat-treating problem solved and production stepped up with the help of Gulf Super-Quench!

It will pay you to investigate this remarkable quenching oil—call in a Gulf Service Engineer and let him demonstrate how it can help you improve your heat-treating practice. For your copy of the new brochure on Gulf Super-Quench, send the coupon below.

For Victory— buy United States War Bonds and Stamps

GULF INDUSTRIAL LUBRICATION

Gulf Oil Corporation · Gulf Refining Company A
3800 Gulf Building, Pittsburgh, Pa.
Please send me, without obligation, a copy of the new brochure, "Gulf Super-Quench."
Name.....
Title.....
Company.....
Address.....

a new member of our family



OUR AIRCRAFT PARTS DEPARTMENT TAKES CARE OF THESE SUPER ACCURATE BOLTS

A large plant, specializing for years on Socket Screws, insures a product absolutely dependable.

STANDARD PRESSED STEEL CO.

JENKINTOWN, PENNA., BOX 566 · BRANCHES: BOSTON · DETROIT · INDIANAPOLIS · CHICAGO · ST. LOUIS · SAN FRANCISCO

Precision made

to meet the need of the AIRCRAFT INDUSTRY

Reg. U. S. Pat. Off.

UNBRAKO




Knurled "Unbrako" Socket Head Cap Screws

The knurled heads prevent time-wasting finger slip and lost motion—help speed production. Knurling also permits locking after countersinking. Sizes: No. 4 to 1 ½" diameter.

"UNBRAKO" Self-Locking Hollow Set Screws with the Knurled Points

Maintenance, time and money savers. When tightened as usual, the knurls dig in and lock the screws in place so they positively won't work loose under vibration. Sizes: No. 4 to 1 ½" diameter.



Pat'd. and Pat's. Pend.

"UNBRAKO" Socket Head Stripper Bolts

with accurately ground bodies. Available with knurled heads, as shown. Great variety of sizes immediately available from stock.




OVER 40 YEARS IN BUSINESS

STANDARD PRESSED STEEL CO.

JENKINTOWN, PENNA., BOX 566 · BRANCHES: BOSTON · DETROIT · INDIANAPOLIS · CHICAGO · ST. LOUIS · SAN FRANCISCO

WHEN THE SNOW STOPS—

START FLYING!

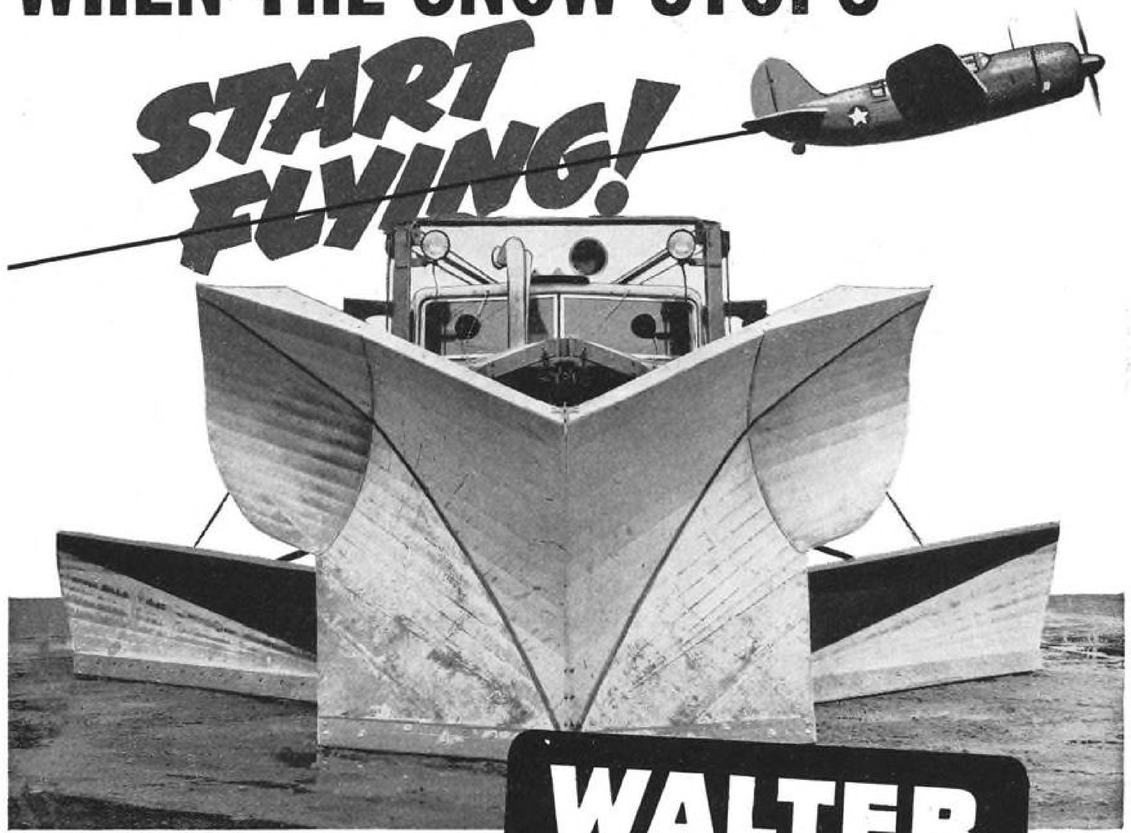

Keep Runways Clear with...

WALTER SNOW FIGHTERS

To prevent snow-clogged runways from grounding planes for hours—often days—after a storm, put rugged, powerful Walter Snow Fighters on the job. Be ready to resume flights the moment visibility clears.


Walter Snow Fighters now in operation, clear 16 foot widths at speeds well over 20 m. p. h. The new 250 h. p. model shown above, can clear a 28 foot width at one pass. At such speeds the snow is thrown far to the side, preventing the formation of dangerous snow banks. So great is the volume of snow handled, that Walter Snow Fighters insure clear runways throughout the worst blizzard.

To maintain this headway, Walter Snow Fighters are engineered with the exclusive Four Point Positive Drive. FOUR powerful driving wheels, each receiving full torque according to its traction at any instant, eliminate the "wheel-spinning" and "side-slipping" that occur with conventional rear-wheel and four-wheel drive trucks. Many other special features contribute to the outstanding performance of Walter Snow Fighters. For full details, write for literature.

The new 250 h. p. Walter Snow Fighter above, is equipped with a special Speed V Front Plow and a right and left Speed Wing, to clear a 28 ft. width in one pass.

WALTER MOTOR TRUCK COMPANY 1001-19 IRVING AVENUE RIDGEWOOD, QUEENS, LONG ISLAND, N.Y.

"They that take up the sword shall perish by the sword."
MATTHEW XXVI:52

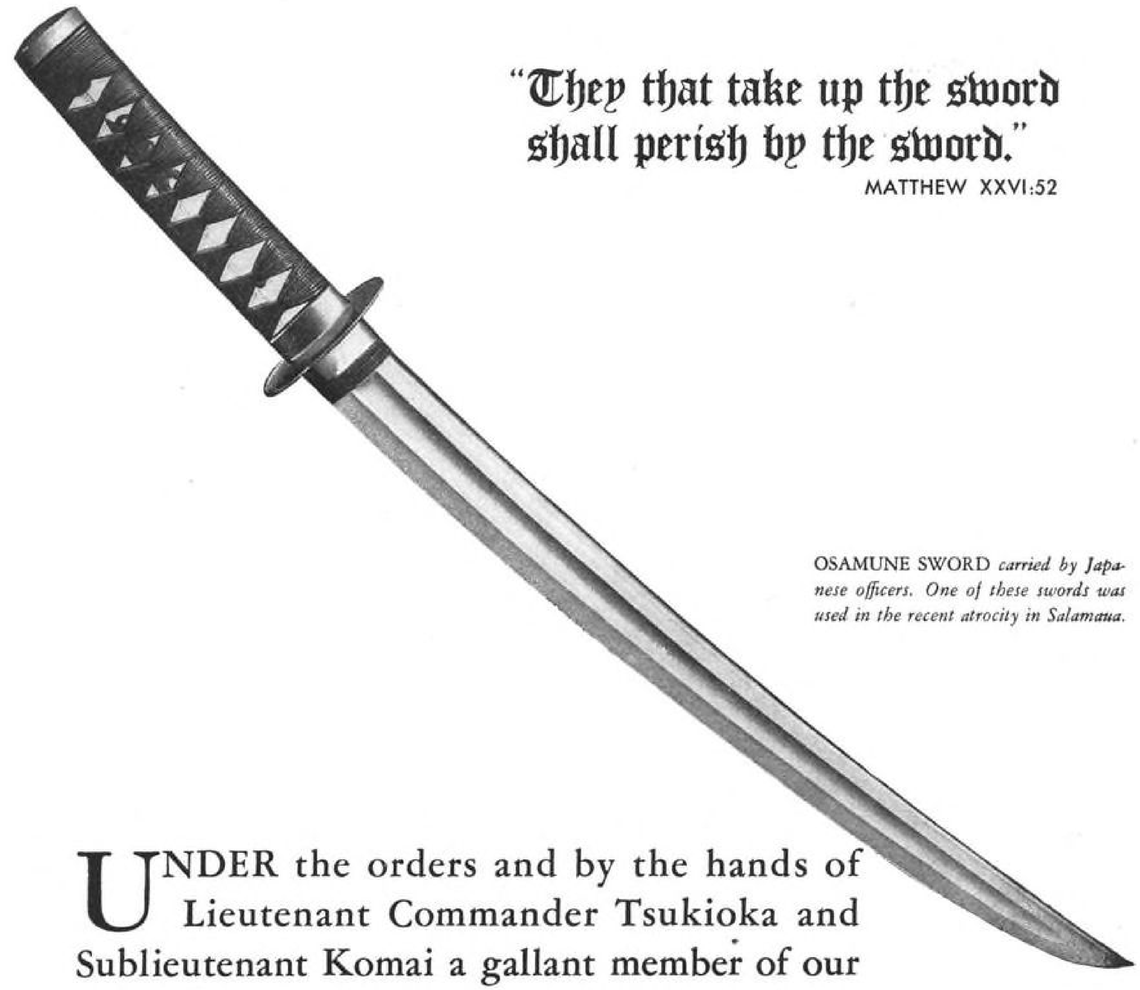

OSAMUNE SWORD *carried by Japanese officers. One of these swords was used in the recent atrocity in Salamaua.*

UNDER the orders and by the hands of Lieutenant Commander Tsukioka and Sublieutenant Komai a gallant member of our flying forces was assassinated in cold blood. Such acts of criminal barbarity will be avenged.

Helping to speed the day of reckoning are precision bomb racks and shackles developed by National Machine Products. These release mechanisms are being used on all our fighting fronts.

NATIONAL MACHINE PRODUCTS
150 W. SLAUSON AVE.
LOS ANGELES, CALIF.

PRECISION CRAFTSMEN

Introducing

Tel-air

ACCURACY DEPENDABILITY PRECISION RELIABILITY

TEL-AIR is a new name . . . a name that means all of the adjectives above . . . a name given to aircraft overhaul tools, screw machine, and other machined parts, and, in the near future, other devices for aircraft. Tel-Air probably includes work that will help your production.

HUNDREDS of different parts on numerous contracts for the Air Force, Navy, and Army Ordnance have been produced to close tolerances in our plant. While these parts may not be the exact parts you use, they will guide you in placing work with us.





For instance, the valve pin above was worked from copper nickel alloy; it included a No. 3 fit thread, a concentricity tolerance for the body, thread, and tip, as well as the square. Thousands of these have been made to the satisfaction of our customer.



We can't tell you how many thousand steel rings pictured above, left, we have made . . . the quantity is large . . . and yet out of the quantity we have already turned out, only one one-thousandth of them have been rejected—and this despite the fact that the tolerances run in the low ten thousandths and concentricity must be maintained between the bore, the groove, outside diameter, and holes.



To the left, is a special wrench that in the early days of our preparation for war was urgently needed by one of the armed services. The quantity wasn't large; it required a special milling cutter, when cutters were hard to get, so we made it and delivered the wrenches on time.

No matter what the material is, we can handle it; alloy steel, carbon steel, copper nickel alloy, brass, naval brass, aluminum. The part at the right happened to be of a particular kind of brass; tolerance on one angle being less than one minute, and all threaded holes being held in close relation to one another.



TOOLS to make the parts as well as maintain the war materiel are included among those products we have and are manufacturing. And while we do not claim to be a tool and die shop, our plant has turned out gages, fixtures, dies, and jigs in emergencies for such concerns as Massey Harris Co., J. I. Case Co., the Heil Co., Chrysler Corp.



The piece shown at the right, below, is one of several hundred drill fixtures used someplace on aircraft. Made of tool steel, it and the others like it were for use with $\frac{1}{16}$, $\frac{3}{32}$, and $\frac{1}{8}$ inch drills.



Made of an aluminum alloy, the ring to the left required close concentricity throughout, while the plug to the right, above, required a fine finish.

Stampings from steel and brass are also made by us; one of the stampings is shown at the left. The dies were made by us.



Another part made of an aluminum alloy is the post to the right. The hole, with a No. 3 fit thread, had to be square with the thin slot.

Tel-Air means all of these parts and many more, because all of these parts were precision made, because the contractors found our service in supplying them reliable, and because they knew that when we shipped, they could depend on having them as they wanted them. That's Tel-Air, and Tel-Air can help you. Send your blueprints for questions.



The Teleoptic Company, Racine, Wisconsin

On the Highways—it's Teleoptic . . . In the Air—It's Tel-Air

Manufacturers for more than 25 years



DECARBONIZE AIRCRAFT PISTONS

By This Simple, Cold Immersion Method

Because cleaning of aircraft pistons is considered a process apart from other aircraft overhaul operations, TURCO CARBRAX was formulated to fill this very special need. Its use presents the fastest, as well as the most thorough piston cleaning method yet devised.

TURCO CARBRAX simplifies the decarbonizing of pistons because it involves no more than simple cold immersion in a tank.

Its penetrating action attacks deposits of hard carbon, engine "varnishes," chlorides, bromides and sulphates formed by combustion of high test "leaded" aviation fuels. TURCO CARBRAX is harmless to aluminum and other reactive metals.

SEND FOR THE TURCO BOOKLET ON AIRCRAFT ENGINE OVERHAUL PROCEDURE WITH TURCO CARBRAX. IT IS SAFE, ECONOMICAL AND FAST.

TURCO
PRODUCTS, INC.

SPECIALIZED INDUSTRIAL CHEMICAL COMPOUNDS


MAIN OFFICE & FACTORY: 6135 SO. CENTRAL AVE., LOS ANGELES 1, CHICAGO OFFICE & FACTORY: 4856 SO. HALSTED ST., CHICAGO 9
SERVICE MEN AND WAREHOUSE STOCKS IN ALL PRINCIPAL CITIES

BUY WAR BONDS

TURCO PRODUCTS, INC.
6135 SO. CENTRAL, LOS ANGELES 1, CALIF.
Send TURCO CARBRAX Aircraft Engine Overhaul Booklet.

Name Firm
Title
Address
ON YOUR LETTERHEAD, PLEASE 22-113

HYCON
Hydraulic Pumps

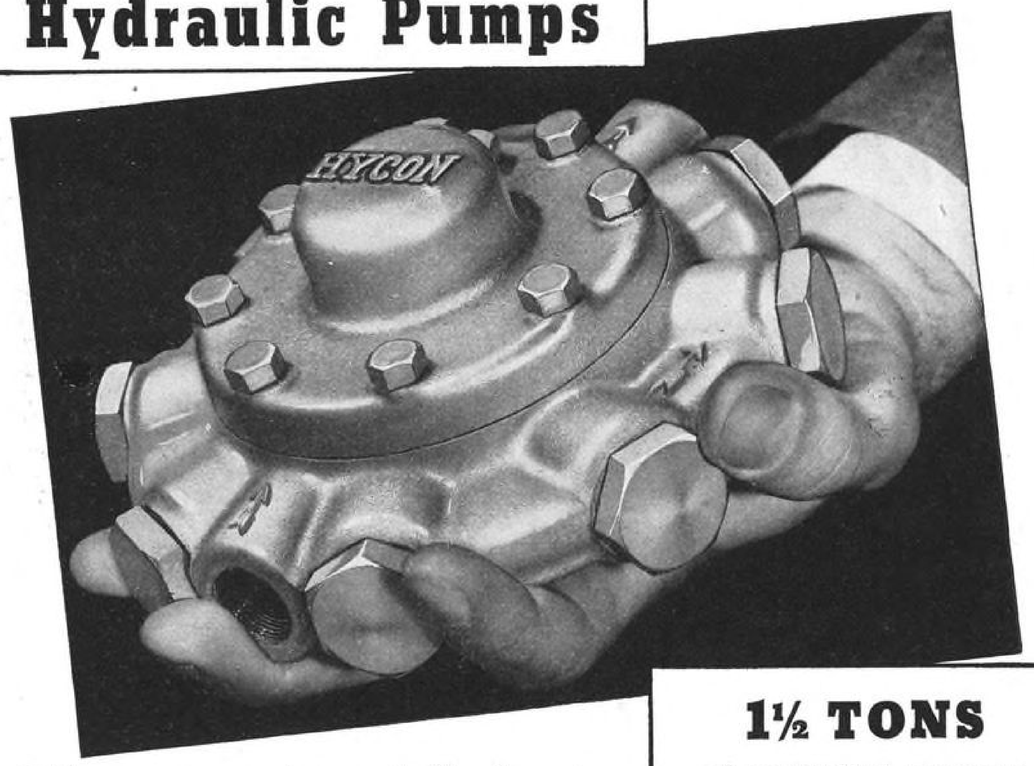

1½ TONS
of controlled pressure in the palm of your hand

The compact, dependable heart of your hydraulic system

Testing units—Machine application
Pumps and valves for all purposes requiring low volume and high pressures


HYCON positive displacement pumps are built in two capacities — Model K (four cylinders) and Model L (eight cylinders)

Model	Rated Capacity in G. P. M. at 1800 R. P. M.	Maximum Pressure P. S. I.	Recommended Motor Drive
K	.53	3000	2 H. P.
L	1.05	3000	3 H. P.

EQUIPMENT AVAILABLE FOR IMMEDIATE DELIVERY

Catalogues on request

THE NEW YORK AIR BRAKE COMPANY
Hydraulic Division
420 Lexington Avenue, New York 17, N. Y.

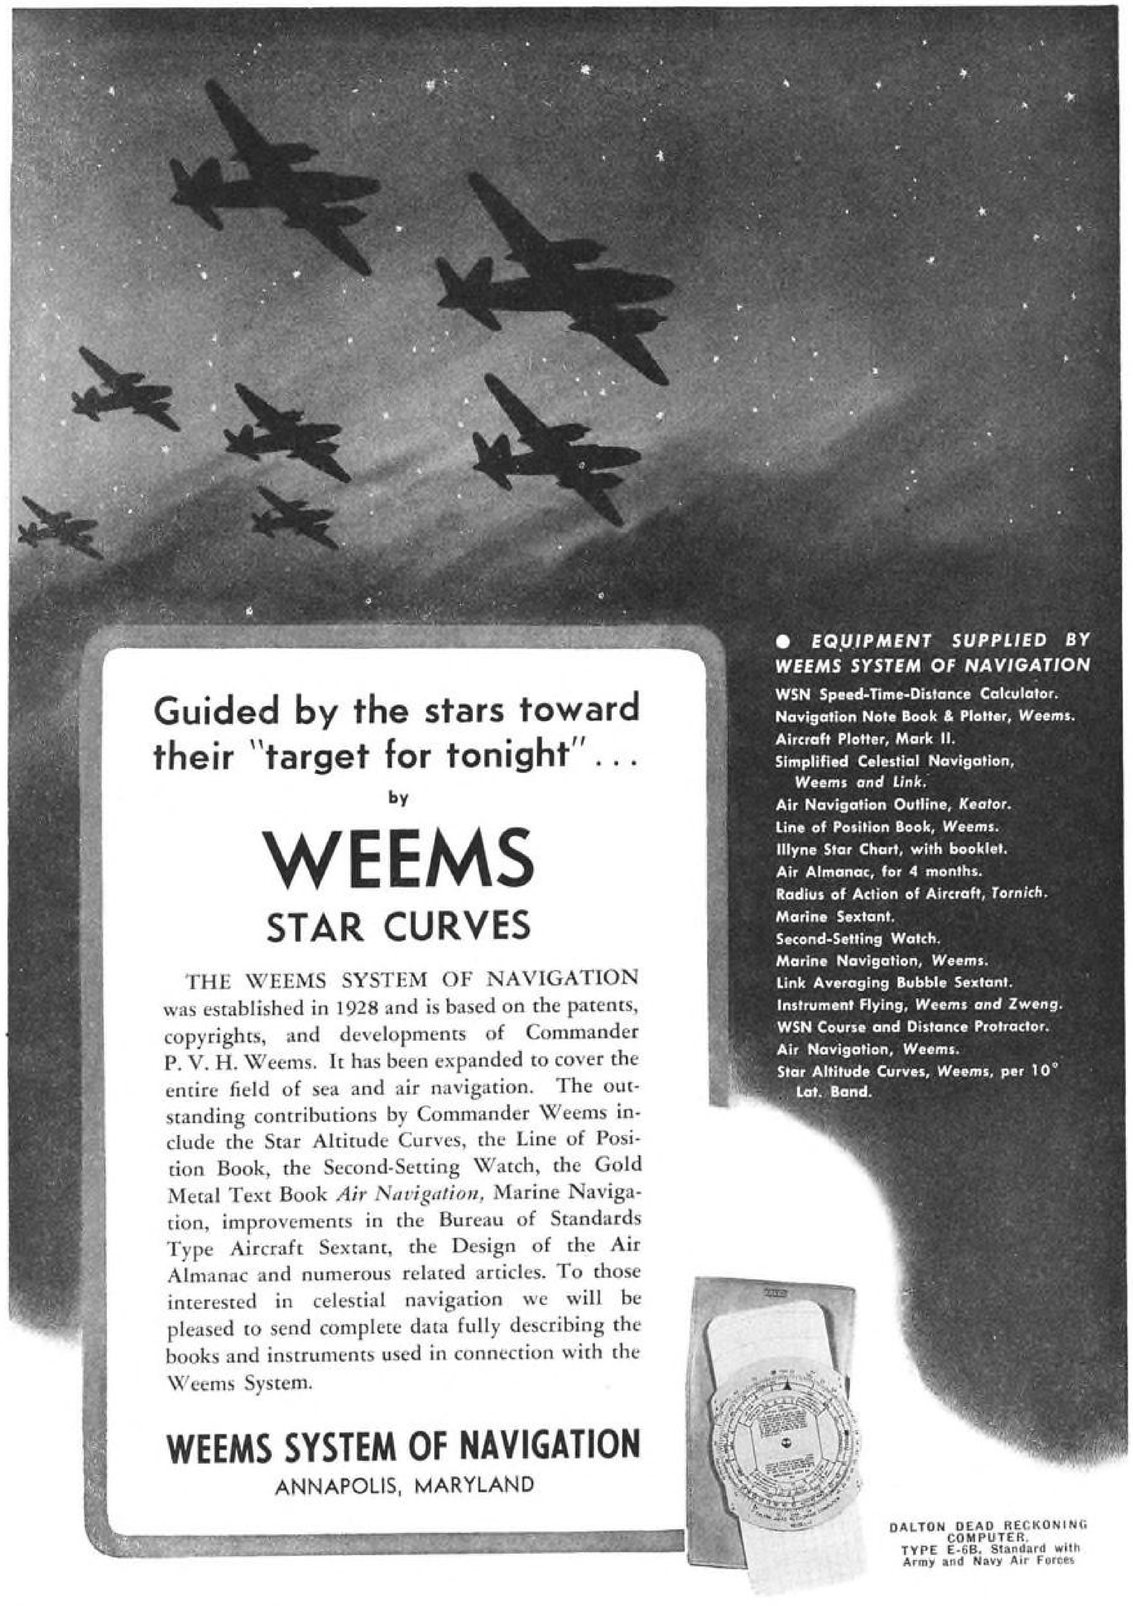

Guided by the stars toward their "target for tonight" . . .

by

WEEMS
STAR CURVES

THE WEEMS SYSTEM OF NAVIGATION was established in 1928 and is based on the patents, copyrights, and developments of Commander P. V. H. Weems. It has been expanded to cover the entire field of sea and air navigation. The outstanding contributions by Commander Weems include the Star Altitude Curves, the Line of Position Book, the Second-Setting Watch, the Gold Metal Text Book *Air Navigation,* Marine Navigation, improvements in the Bureau of Standards Type Aircraft Sextant, the Design of the Air Almanac and numerous related articles. To those interested in celestial navigation we will be pleased to send complete data fully describing the books and instruments used in connection with the Weems System.

WEEMS SYSTEM OF NAVIGATION
ANNAPOLIS, MARYLAND

● ***EQUIPMENT SUPPLIED BY WEEMS SYSTEM OF NAVIGATION***

WSN Speed-Time-Distance Calculator.
Navigation Note Book & Plotter, *Weems.*
Aircraft Plotter, Mark II.
Simplified Celestial Navigation, *Weems and Link.*
Air Navigation Outline, *Keator.*
Line of Position Book, *Weems.*
Illyne Star Chart, with booklet.
Air Almanac, for 4 months.
Radius of Action of Aircraft, *Tornich.*
Marine Sextant.
Second-Setting Watch.
Marine Navigation, *Weems.*
Link Averaging Bubble Sextant.
Instrument Flying, *Weems and Zweng.*
WSN Course and Distance Protractor.
Air Navigation, *Weems.*
Star Altitude Curves, *Weems,* per 10° Lat. Band.

DALTON DEAD RECKONING COMPUTER, TYPE E-6B. Standard with Army and Navy Air Forces


Announcing Production of

ALL-ALUMINUM ALLOY
AIRCRAFT ENGINE
PRESTONE RADIATORS
and
OIL COOLERS
for Army Air Forces

SAVING ⅔ THE WEIGHT
of copper units of the same size and rating

CLIFFORD MANUFACTURING CO.
564 EAST FIRST STREET, BOSTON

Producers of HYDRON Metallic Bellows and bellows assemblies for all types of aircraft controls and instruments

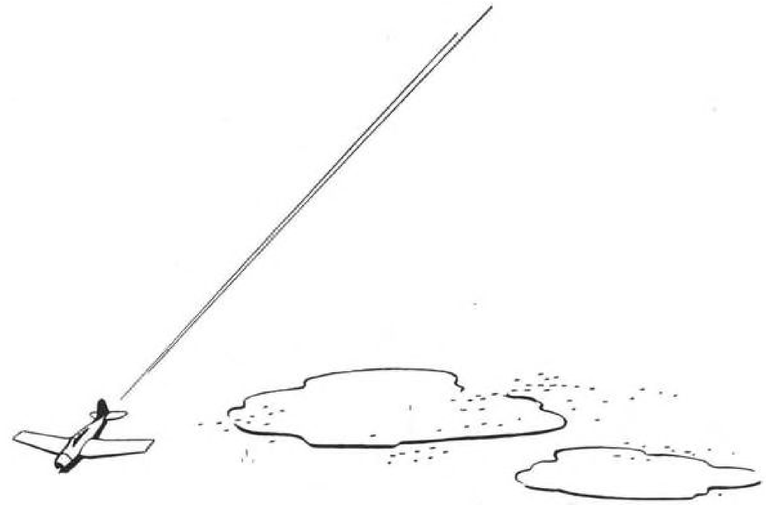



Built to Take Vibration at Its Worst!

THERE is no tougher test for any relay than the vibration set up by a power dive. Yet Automatic Electric's Class "S" Relays take the worst beating that this service can give, and come through with a safe margin to spare.

These tiny but powerful relays have been specially designed to meet the tough conditions of modern flying. Light weight and small size are only part of the story. Even more important are these features:

1. Vibration resistance is no after-thought with Class "S" Relays—it's built in. It surpasses the most rigorous tests required by the Signal Corps and the Air Forces.

2. Unique spring design provides high contact pressure within small space limits.

3. Twin contacts provide added assurance of reliability.

4. Newly designed pin-pivoted armature with full-length bearing results in exceptionally long life, even under the toughest conditions.

Before specifying relays for use on aircraft or for other applications where small size, light weight and dependability are important, get the facts on Class "S".

Write for circular.

AUTOMATIC ELECTRIC SALES CORPORATION
1033 West Van Buren St., Chicago, Ill.

In CANADA: Automatic Electric (Canada) Limited, Toronto

Relays
AND OTHER CONTROL DEVICES
by AUTOMATIC ELECTRIC

PARTS AND ASSEMBLIES FOR EVERY ELECTRICAL CONTROL NEED



Another "IMPORTANT LITTLE THING" that makes the

AAF superior in combat!



ONE OF 25 TYPES OF AAF FILTERS NOW IN USE

It's the important little things on our combat planes and bombers, products of American research and ingenuity, that have accounted for much of the success of the American Air Force against the enemy. AAF engine filters are one of those *important little things*—because they enable airplane engines to fly *10 times as long without an overhaul and maintain maximum performance* no matter how severe the dust condition on the front line fields from which they operate. Send for complete engineering and performance data.

AMERICAN AAF AIR FILTERS

AMERICAN AIR FILTER COMPANY, INC., 346 CENTRAL AVE, LOUISVILLE, KY.

IN CANADA, DARLING BROTHERS, LIMITED, MONTREAL, P. Q



Classroom of the R.A.F.

REMOVE the gray-green battle dress of the R.A.F. from the plane pictured above and you might easily recognize the famed Stinson "Reliant" of pre-war days. This plane, produced by Stinson Aircraft at Wayne, Michigan, was pridefully owned by hundreds of American businessmen and sportsmen, and used by every major American airline for blind flight training. Today, stripped of all its pre-war luxury refinements, the "Reliant" is doing yeoman duty as a "flying classroom" in the Royal British Navy. Hundreds upon hundreds of pilots, observers, radio operators and navigators now flying giant Consolidated "Catalinas" and British Short-Sunderland patrol bombers learned their flying ABC's in this ship which is being turned out in ever increasing quantities by Consolidated Vultee's famous Stinson Division at Wayne, Michigan.

A heavy bomber is an expensive classroom. Most of them are needed over Germany and Japan where there is no room for the novice. That's why training plane production is most vital; that's why you can be sure that Consolidated Vultee's Stinson Division is sparing no effort to get more and more, and still more of these fine navigation trainers into the capable waiting hands of British flyers. At McAleer, we are privileged to add our skill and knowledge as well as our highly developed manufacturing facilities to this effort as we work day and night to build surface assemblies for the AT-19 Trainer. By accepting our share of the responsibility to those brave British lads who will train in the ships we are helping produce, we feel we have made a covenant with them which will not and cannot be broken until the United Nations are successful in producing a peace that *must* be permanent.

McAleer MANUFACTURING CO.

Manufacturers of Quality-Controlled Finishing Materials, Military Aircraft Sub-assemblies and Pyrotechnics . . .

ROCHESTER, MICHIGAN

48% Critical Material SAVED in Turnbuckle Production

RELIABLE LEADS INDUSTRY by Devising New Methods

The Reliable Electric Company of Chicago, after many months of close cooperation with the Army Air Force Materials Distribution Branch, Production Engineering Department and Aircraft Laboratory, and endless experiments, have effected savings of 48% in critical material and 100% in critical machine time in the production of turnbuckle barrels, and 91% in critical material and 96% critical machine time in the production of turnbuckle forks, to provide prompt delivery of Aircraft Turnbuckles.

Value of Experiments

As an indication of the value of these developments, the saving on 100,000 AN150-32L Turnbuckles, which is a moderate quantity of an average size, is 60,800 lbs. of molybdenum steel and 9,100 lbs. of brass.

The bottleneck in skilled operators and critical machine tools—largely on turret lathes and multiple spindle automatic screw machines—is relieved to the extent of 22,725 hours on this quantity. This time can be devoted to the production of other critical "AN" parts by placing fork and barrel orders with Reliable.

The Reliable Electric Company normally devotes its entire capacity and laboratory to the development and manufacture of telephone and power line equipment. At present this company is applying its modern facilities in many fields with similar results to those mentioned above, from which interesting future communication and power equipment developments can be expected.

A N 150 Turnbuckle Assembly

A N Part No.
AN150-16S
AN150-16L
AN150-32S
AN150-32L
AN150-46S
AN150-46L

A N 155 Turnbuckle Barrel

A N Part No.
AN155-8S
AN155-16S
AN155-16L
AN155-32S
AN155-32L
AN155-46S
AN155-46L
AN155-61L
AN155-80L

A N 161 Turnbuckle Fork


U. S. ARMY AIR FORCE Part No.	A N Part No.
Air Force X43B2342-16LS	*AN161-16LS
Air Force X43B2342-16RS	**AN161-16RS
Air Force X43B2342-16LL	AN161-16LL
Air Force X43B2342-16RL	AN161-16RL
Air Force X43B2342-32LS	AN161-32LS
Air Force X43B2342-32RS	AN161-32RS
Air Force X43B2342-32LL	AN161-32LL
Air Force X43B2342-32RL	AN161-32RL
Air Force X43B2342-46LS	AN161-46LS
Air Force X43B2342-46RS	AN161-46RS
Air Force X43B2342-46LL	AN161-46LL
Air Force X43B2342-46RL	AN161-46RL


Furnished in Right and Left Hand Threads
*AN161L(S) S means Short Length — L Long Length
*AN161(L)S L means Left-Hand Thread
**AN161(R)S R means Right-Hand Thread

Distributed by GrayBar

Reliable ELECTRIC COMPANY
3145 CARROLL AVENUE, CHICAGO

Completely Cold Forged by HOLO-KROME

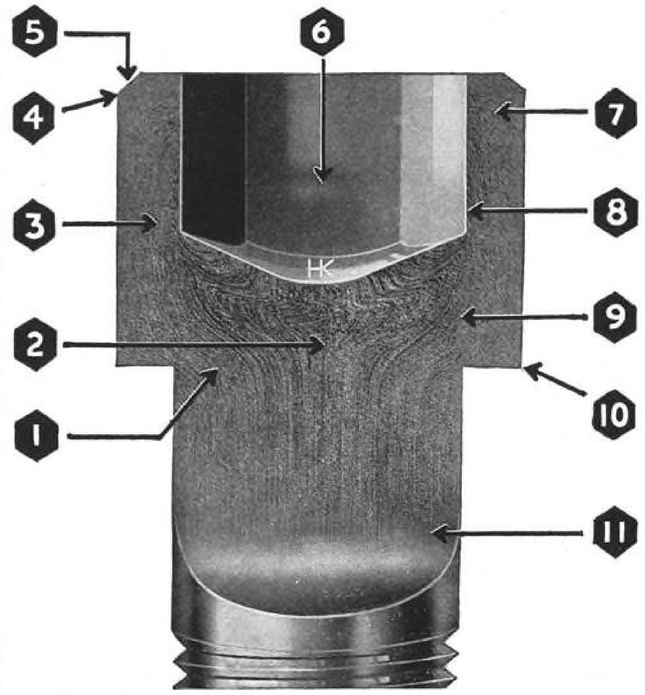

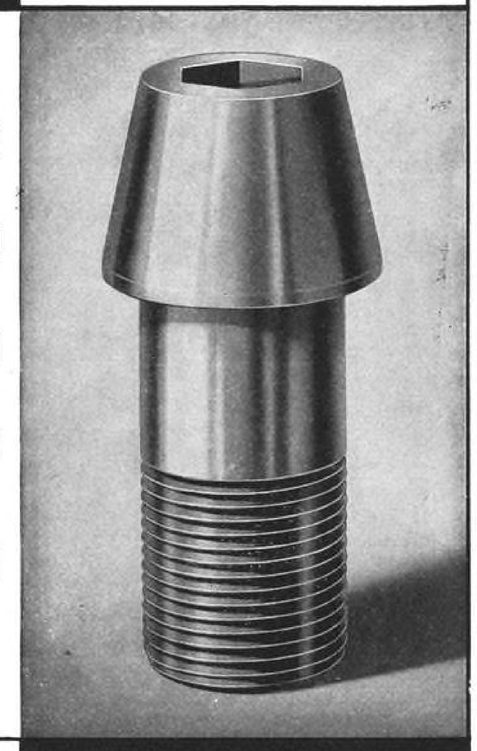

Unretouched Photo Etched Cutaway Holo-Krome Bolt

NASC SPECIFICATIONS

INTERNAL WRENCHING BOLTS *by* HOLO-KROME

EXCLUSIVE HOLO-KROME FEATURES

1—INCREASED STRENGTH.
2—CONTINUOUS UNCUT LATERALLY DEFLECTED CORE FIBRES.
3—CONTINUOUS UNBROKEN FIBRES.
4—SMOOTH FLAT TOP WITH SLIGHT CHAMFER.
5—CONCENTRICITY OF HEAD WITH BODY.
6—SOCKETS—UNIFORMLY ACCURATE TO FULL DEPTH OF HOLE—TRUE HEXAGONAL SHAPE — ACROSS FLAT SECTION DIAMETER IDENTICAL TOP AND BOTTOM — NO TAPER—SMOOTH REGULAR WALLS —WELL DEFINED CORNERS.
7—CONTINUOUS FIBRES ENDING IN SOCKET WALLS.
8—REINFORCED SOCKET WALLS.
9—CONTINUOUS UNCUT FIBRES.
10—SQUARE SHOULDERS.
11—ORIGINAL CONTINUOUS FIBROUS STRUCTURE.

[UNDER SIDE OF HEAD AND BODY ARE GROUND ON ALL HOLO-KROME NASC BOLTS]

Proving daily the better fastening method in Aircraft Construction . . . To NASC Specifications and to Special Design, Holo-Krome Internal Hex Wrenching Bolts and Screws answer those "critical fastening jobs" which design and Production Engineers encounter in the development of their production plans. . . More compact and efficient design is the result. . . Feel free to consult H-K Fastening Engineers anytime . . . Specify "Holo-Krome".


SAVE VALUABLE WEIGHT — SPACE — TIME

● **Internal Hex Wrenching Bolt NASC Specifications plus valuable Fastening data in CATALOG A4—Write for it.** ●

AIRCRAFT DIVISION— THE HOLO-KROME SCREW CORP., HARTFORD 10, CONN., U. S. A.

Clarke HYDRAULIC GUN TURRET CONTROL VALVES

AERO-HYDRAULICS, INC.

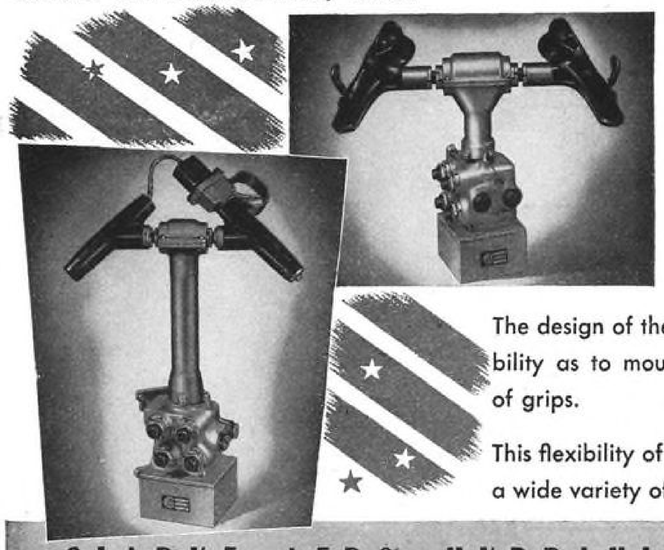

- ***Smoothness of control***
- ***East of adjustment***
- ***A definite "feel"***

These qualities as found in the Clarke Aero-Hydraulic Gun Turret Control Valve account for the effective fire power obtained in turrets using the Clarke Valve.

The design of the valve is such that it affords maximum flexibility as to mounting position, length of column and style of grips.

This flexibility of design makes the valve susceptible to fitting a wide variety of turret installations.

CLARKE AERO-HYDRAULICS, INC.

PASADENA • CALIFORNIA

Accurate SURFACE PLATES




for Prompt Delivery!

For immediate delivery place your order now before stock items are exhausted. If possible give alternative size. Write Dept. 29 for latest Precision Equipment Catalogue

Representing the acme of vital precision inspection equipment, Lombard Master Style Surface Plates are now available from stock. With their scientifically designed ribbing, three point suspension and extremely rugged construction, these master accurate surface plates are carefully heat treated and hand scraped to extremely close tolerance. Commercial style surface plates are also available. These plates although of a different basic design are now being universally used for general inspection and shop use.

	Sizes	Types A	B	C
The Master Style	14"x18" to 48"x96"	.0001	.0003-4	.0005-.001
The Commercial Style	8"x12" to 48"x96"	.0002-3	.0005-.001	


Planer finish also available in both styles. All plates are furnished with lifting handles and finished wooden covers.

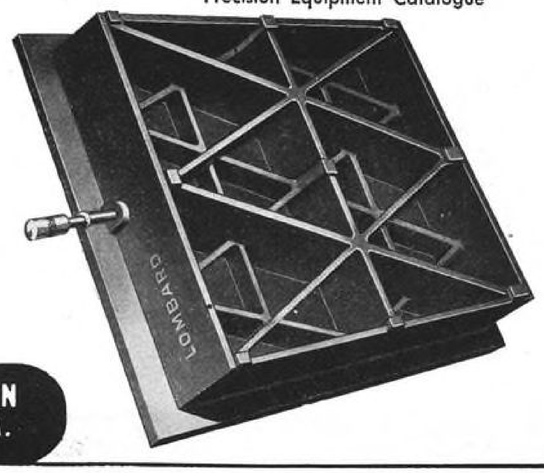

LOMBARD GOVERNOR CORPORATION

650 MAIN ST. ASHLAND, MASS. U. S. A.


How to replace cutting tools that can't be salvaged

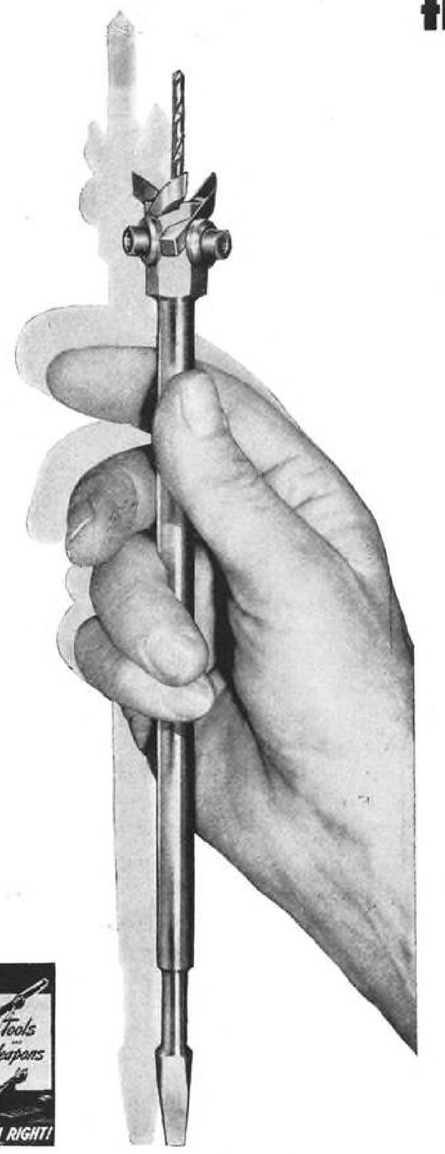




When worn or broken cutting tools can't be reclaimed for further service, replacement should be made with tools that conserve vital materials, time and labor. CLARK CUTTING TOOLS comply with critical requirements, do better work quicker.

They use a minimum of tool steel (in cutting blades only); these can be resharpened repeatedly, replaced economically. Being adjustable, a few sizes do the work of many other tools, slash inventory. They make clean, *finished* cuts, reduce operations.



EXAMPLE NO. 1

Clark Adjustable 3-Blade Hole Cutters make accurate, smooth holes in flat or curved metal, plastics, wood, transite. 7 sizes cut ⅜" to 5", up to 1" thick. No reaming or deburring. Fewer operations are required.



EXAMPLE NO. 2

Clark Adjustable 2-Blade Fly Cutters. 2 sizes cut holes or discs 2½" to 10", up to 1" thick. Pitched blades cut true, relieve chatter. Other models cut gaskets, rings, discs from live rubber, problem materials.



EXAMPLE NO. 3

Clark Adjustable 3-Blade Facing Tools. 4 sizes cover all fractional diameters, 1¼" to 5", do the work of End, Shell and Slab Mills, Inserted Tooth Cutters. Fit all machines. Tools available with all types of blades, including carbide tips.

WRITE FOR BULLETIN NO. 10-S



EXAMPLE NO. 4

A real tool bit conserver! Mechanic's MODEL A and Heavy Duty MODEL B for accuracy, uniformity in grinding *both* National 60° and Acme 29° tool bits. Both models handle bits for use in Armstrong Tool Holders. *SPECIAL MODEL C* for grinding Clark Hole Cutter Blades.



SPECIAL NOTICE!

The Robert H. Clark Company Engineering Staff has successfully designed numerous special cutting tools for many of our leading war industries. Operations made possible by the use of these special tools have removed serious production bottlenecks. If you have any hole cutting or facing operations that constitute a problem, feel free to submit the details to us . . . they will receive our immediate attention.


In Canada: DOMINION BEARINGS, LTD., Toronto, Montreal, Winnipeg

Export: THE AMERICAN STEEL EXPORT COMPANY, INC., New York, Los Angeles

Robert H. Clark Company

3424 SUNSET BLVD. • LOS ANGELES 26

HELP FOR THE AIRCRAFT INDUSTRY

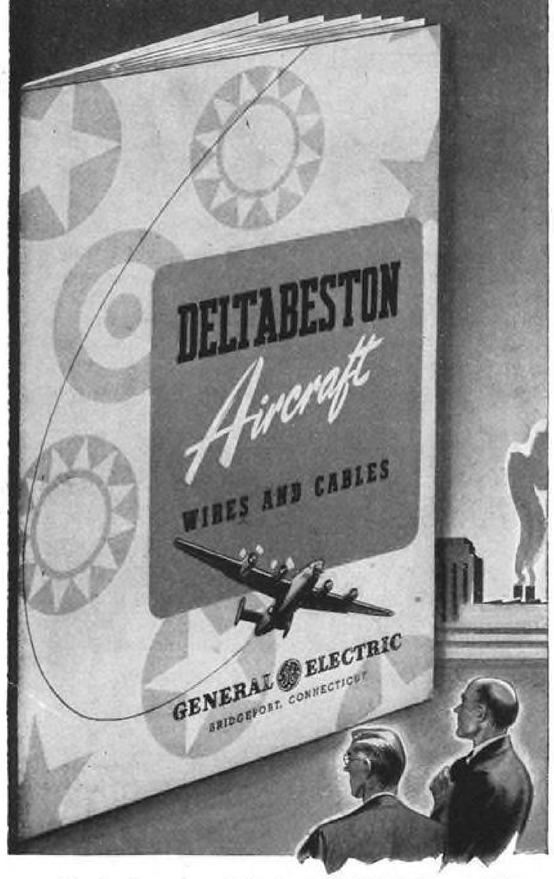

Here's the newest bulletin on G-E Deltabeston Aircraft Wires and Cables. It contains the features, construction and up-to-the-minute specifications for Nos. 57300, 57332 and 57333 wires and cables. It's crammed with other helpful information such as inspection, test, packaging, shipping and Federal specifications. A technical data section contains useful tables and figures. In short, it's a bulletin every purchasing agent and electrical engineer in the aircraft industry will want immediately.

Deltabeston Aircraft Wires and Cables are distributed nationally by Graybar Electric Company, G-E Supply Corp. and other G-E Merchandise Distributors.

Fill in this coupon—we'll rush your copy to you

Section Y1134-84
Appliance & Merchandise Dept.
General Electric Company
Bridgeport, Conn.


Please send me a Deltabeston Aircraft Wire Bulletin now.

Name.....
Company.....
Address.....
City..... State.....

GENERAL ELECTRIC

Young Presents

NEW OIL LINE SURGE VALVE

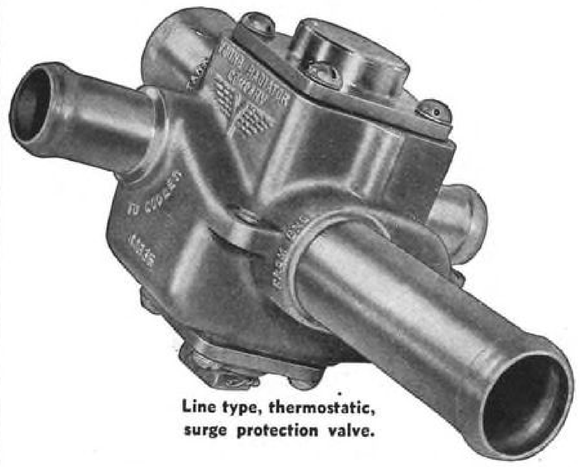

Line type, thermostatic, surge protection valve.

Sudden surges of congealed oil developed by scavenging pumps during cold starts often cause cooler failures. By-passing oil around coolers during these periods gives needed surge protection. Young engineers have now completed the first thermostatic, line-type, surge protection valve with provision for relief from rapid acceleration pressures. It gives a new kind of cooler protection and was designed for systems not incorporating surge protection in the cooler valve.

Normally open, the new valve permits the pumping of congealed oil directly from engine to supply tank. As oil warms, the by-pass closes and the cooler inlet opens . . . warming oil is directed through the cooler jacket bringing the core into operating condition. You are invited to write, give your performance requirements and get full information about Young's new oil line surge valve and how it fits your needs.

YOUNG RADIATOR CO., Dept. 293-L Racine, Wis., U.S.A.

Distributors
Pacific Airmotive, Burbank, California
Aircraft Steel and Supply Co., Wichita, Kansas

Buy Bonds — Produce More — Salvage Scrap — Win the War

YOUNG

HEAT TRANSFER PRODUCTS

Oil Coolers - Gas, Gasoline, Diesel Engine Cooling Radiators - Intercoolers - Heat Exchangers - Engine Jacket Water Coolers - Unit Heaters - Convectors - Condensers - Evaporators - Air Conditioning Units - Heating Coils - Cooling Coils



For Little INSIDE JOBS

BAY STATE
Internal Grinding Wheels

are made closely to size, with arbor holes parallel to face and accurately centered—take heavy, fast cuts and have long life—are uniform—their porosity is predetermined.

Send for bulletin.

BAY STATE
ABRASIVE PRODUCTS CO., WESTBORO, MASS. U.S.A.

How to solve airplane structural design problems

with practical methods of stress analysis



Just out!

Expressly written to airplane draftsmen, this book displays a sound understanding of the airplane draftsman's actual design problems and his most practical and effective approach to the solutions of these problems. Taking as its basis a large number of illustrative problems from existing airplane designs, this book reviews the principles of applied mechanics—familiar to draftsmen in many fields—and shows how to use these principles in gaining an approximately correct design and to solve a great number of everyday airplane structural problems.

STRESS ANALYSIS *for* AIRPLANE DRAFTSMEN

By Ernest J. Greenwood *and* **J. R. Silverman**
Chance Vought Aircraft Division, United Aircraft Corporation
291 pages, 5¼ x 8¼, 177 illustrations, $3.00

FROM the first chapter on airplane load structure to the appendix of useful data—standard as well as most recent, this book is teeming with direct, applicable information—complete, step-by-step illustrative examples, numerous, detailed explanatory illustrations and diagrams, and at the end of each chapter a set of problems affording further constructive emphasis to the material presented. Whenever a new structural principle is presented many of the applications of it throughout the structure of the airplane are enumerated.

Some of the topics covered:

- survey of aerodynamics
- actual properties of materials most commonly used in airplane design
- Army-Navy specifications of materials used in airplane structure
- relationship between normal and shear stresses
- design of riveted seams
- types of "beams"
- theories of bending
- design of airplane parts carrying tension or compression loads
- round tubes in torsion
- problems of fatigue and stress concentrations

10 DAYS' APPROVAL
Mail this coupon—

McGRAW-HILL BOOK CO., INC., 330 W. 42nd St., New York 18, N. Y.
Send me Greenwood and Silverman Stress Analysis for Airplane Draftsmen for 10 days' examination on approval. In 10 days I will send $3.00 plus few cents postage, or return book postpaid. (We pay postage on orders accompanied by remittance.)

Name .....
Address .....
City and State .....
Position .....
Company .....Av. 11-43



"Come and get me" calls out this airman forced down at sea. Out of urgent necessity, American ingenuity devised this Bendix hand-powered radio transmitter in ten days and nights. Now airmen proclaim the "Gibson Girl" the love of their lives!

Callite is proud to contribute Silver Contacts to do their important bit in important applications for Bendix. Precision-made throughout, C-T Contacts pass Bendix' rigid inspection because they are carefully checked from start to finish.

Rely on Callite for metallurgical knowledge, expert, imaginative engineering assistance and precision production. Callite Tungsten Corporation, 545 Thirty-Ninth St., Union City, N. J. Branches: Chicago, Cleveland.

ARMY E NAVY

Contacts of Tungsten, Molybdenum, Silver, Platinum, Palladium, and Special Alloy Combinations — in round, flat, or unusual shapes.
Send for Catalog No. 152.



CALLITE TUNGSTEN CT

CALLITE CONTACTS

STUDENT WELDERS
LEARN PROPER FLAME ADJUSTMENT FASTER



with this natural color oxyacetylene flame adjustment chart

Student welders and "beginners" learn to make correct flame adjustments more quickly when they are guided by an Airco oxyacetylene flame-color chart. This helpful chart shows full color illustrations of the principal flames used for welding metals.

It makes it easier for the beginner to make sound, strong welds by clearly showing the appearance of the neutral flame which he will use most frequently in oxyacetylene welding.

The excess acetylene flame is also shown, as well as the oxidizing flame used for welding copper and copper alloys.

Since the first requisite to good welds is correct flame adjustment, every student welder will benefit by using this flame chart as his guide.

We will be glad to send you, without charge, as many copies of this chart as you need. Mail coupon and please indicate quantity you require.

FOR VICTORY BUY UNITED STATES WAR SAVINGS BONDS STAMPS

AIRCO WILSON

BUY UNITED STATES WAR BONDS

AIR REDUCTION
General Offices: 60 EAST 42nd STREET, NEW YORK 17, N. Y.
In Texas: MAGNOLIA AIRCO GAS PRODUCTS CO. • General Offices: HOUSTON, TEXAS

A
AIR REDUCTION Advertising Dept.
60 East 42nd Street, New York, N. Y.
Please send_____copies of the full color flame adjustment guide to:
*Name*_____
*Position*_____
*Company*_____
*Address*_____

You can't start without him!



Contact with the spark plugs of the modern airplane engine is maintained by springs and rivet connections such as are grouped below. These springs are no thicker than a pencil, but without them . . . no "contact"!

With human safety in their care, they must have uniform elasticity—seat accurately—withstand extreme "fatigue." They must also resist corrosion, heat, cold and the unceasing rack of modern combat. It is our privilege to supply these springs for several well-known ignition assemblies.

PECK SPRINGS *and* SCREW MACHINE PRODUCTS

The Peck Spring Company 30 Summitt St., Plainville, Conn., U.S.A.

IN ENGLAND·AUSTRALIA OR AMERICA

BOWSER

BOWSER BLITZ-

LONDON:—After returning from a successful bombing expedition last night over Tunisia, a flying officer of the R.A.F. reported the mission carried out most satisfactorily and further commented by saying, "Our biggest successes have been in the destruction of the enemy's petrol supplies. Our pilots have developed an unerring instinct for picking out mobile petrol containers, bowser pumps, and petrol-carrying trailers, and there is confidence here that more of this precious fluid has gone up in flames during the past 13 days than in any other similar period since the Africa Corps arrived in the desert."

IS THE OUTSTANDING NAME IN FUELING!

No . . . the Bowser pumps mentioned as being "blitzed" were not made by Bowser . . . but Bowser equipment is doing plenty to help do the blitzing. The story, however, shows that because of its world-wide activities for many years in designing and manufacturing fueling equipment, such equipment is automatically referred to as Bowser. In this war, as in the last, you'll find Bowser equipment, at home and at the front, fueling jeeps and trucks, busses, railway trains, boats and airplanes and motor cars.

In aviation refueling and defueling systems, the name Bowser is the acknowledged leader. Systems from a can full a minute to a tank car full are available. Metering systems, defueling systems, and airplane fuel consumption meters are also on the job to hasten the day of victory. Yes, the outstanding name in fueling equipment has, and always will be . . . Bowser!

S. F. BOWSER & COMPANY, INC.
FORT WAYNE • INDIANA


ARMY NAVY Buy WAR BONDS and STAMPS


BOWSER

AMERICAS FOREMOST BUILDER OF AVIATION FUEL HANDLING EQUIPMENT

AMERICAN METAL PRODUCTS COMPANY

Manufacturers of Welded Steel Tube, Tubular Parts and Assemblies for the Aircraft Industry

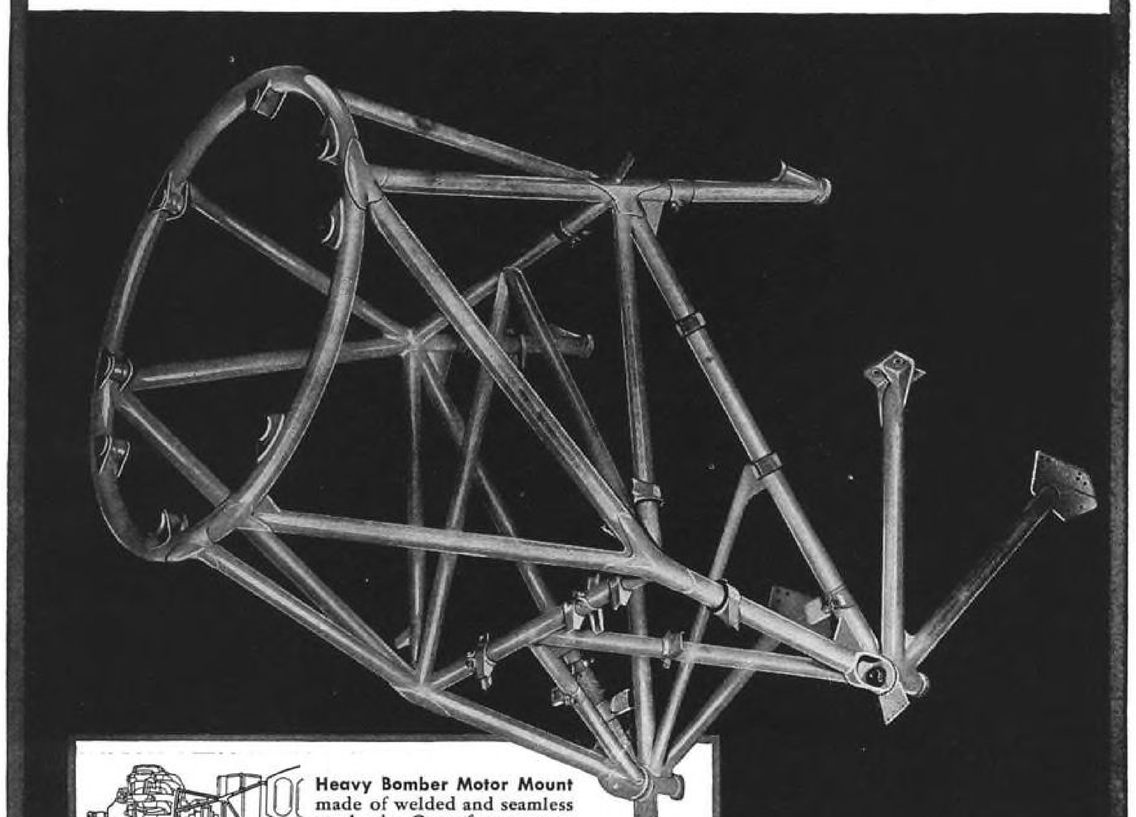



Heavy Bomber Motor Mount made of welded and seamless steel tube. One of many parts and subassemblies made by us for the aircraft industry.

We are specialists in the quantity production of Chrome-Moly and carbon steel assemblies calling for upsetting, forming, swaging, forging, welding, heat treating and machining.

AMERICAN METAL PRODUCTS COMPANY, 5959 LINSDALE AVE., DETROIT, MICH.

Faster, Better DE-BURRING
FINISHING POLISHING
–in fewer operations



BRIGHTBOY offers you outstanding time and work savings, plus quality, precision finish, because it is made of *resilient rubber*. The rubber is *impregnated throughout* with the abrasive.

In use, the abrasive recedes slightly into the rubber, cushioning the abrasive action. The degree of finish is achieved by regulating the machine speed, or in manual operations, the hand pressure. Brightboy's versatility and working simplicity eliminate many in-between operations; a Brightboy finish frequently serves as the final polish. The waste *drops*, just like eraser crumbs; doesn't fly. No special setups are required.

Ask your distributor for Methods and Applications Data, catalogs and prices. Brightboy field representatives are at your service.

Outstanding Work Advantages of Brightboy for All-in-One DE-BURRING, FINISHING, POLISHING

- Bridges the gap between a grind and a buff.
- Does not load, gum or fill.
- Works with minimum dimensional loss.
- Requires no special preparation.
- Made in wheels, blocks, sticks, rods—for manual and machine operations.



★ ★ ★

AVAILABLE IN 3 TEXTURES:

BRIGHTBOY STANDARD
for all around metal finishing.

BRIGHTBOY FINE-TEX
for lighter work—for fine polishing.

BRIGHTBOY TUFF-TEX
for harder metals.

BRIGHTBOY INDUSTRIAL DIVISION
WELDON ROBERTS RUBBER CO.
Newark, N. J.

WELDON ROBERTS
Brightboy

IRVIN Air Chute
The Life Preserver of the Air

SYMBOL OF SAFETY



The name "IRVIN" on the harness means the chute is produced in an Irvin Factory with over 20 years of experience and skill in chute-making. Literature can be had by school or training executives for the asking. Address Main Office, Buffalo, N. Y.

THE CATERPILLAR CLUB

Founded in 1920. There is only one qualification for a life membership: in an emergency men and women who have saved their lives with Irvin Air Chutes. The word CATERPILLAR and representation of a caterpillar are registered trade-mark features of Irving Air Chute Co., Inc. We are anxious that the records of the Club be kept as complete as possible in the Club Register and members, upon enrollment, will receive a caterpillar token with the name inscribed thereon. Communicate with our Main Office.

IRVING AIR CHUTE CO., INC.
1670 Jefferson Ave., Buffalo-8, N. Y.
Other factories in United States, Canada and England

IRVIN Air Chutes

SERVING THE UNITED NATIONS' AIR FORCES

SIMPLE MAINTENANCE KEEPS CP AERO RIVETERS ON THE JOB




Courtesy of Pan-American World Airways


Service Them and They'll Serve You

Today, it is vitally important for all tools to give maximum service. CP Aero Riveters can stand long arduous use with a minimum of maintenance. They are built to take it . . . But abuse is another thing. . . . Care for them. . . . Keep them clean. . . . Lubricate them regularly, and follow the simple maintenance steps outlined below.

HOW TO GET MAXIMUM PRODUCTION FROM YOUR CP AERO RIVETER

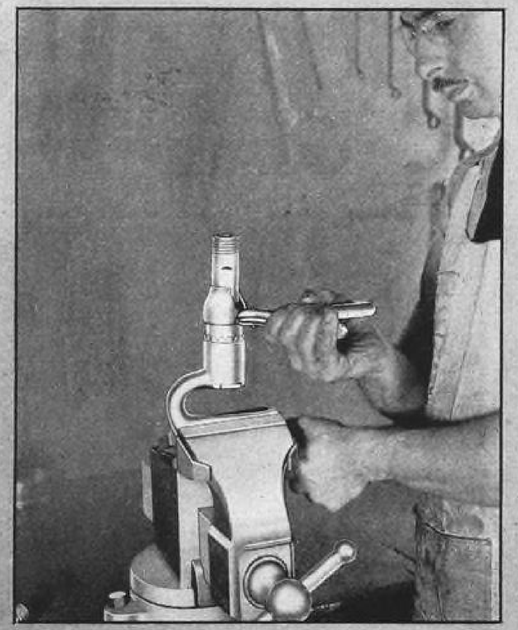

Always remove deflector clip with expansion pliers. Use of a screw driver will injure tool.

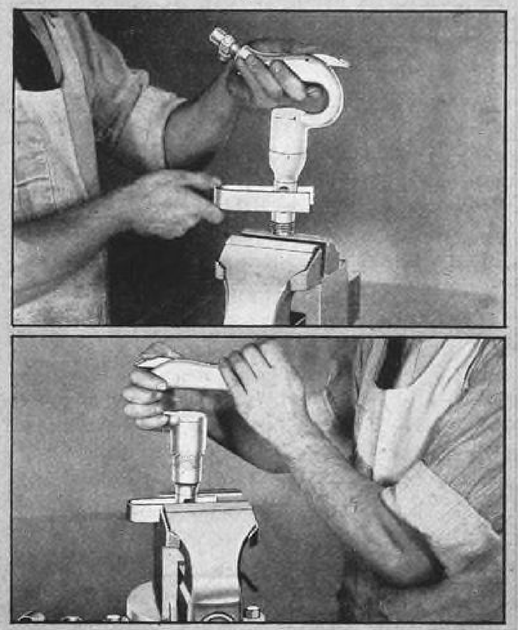

When clamping riveter in vise to remove the handle, use V-strap over flats of the cylinder.

★★★★★★★★★
PNEUMATIC TOOLS
ELECTRIC TOOLS
(Hicycle...Universal)
ROCK DRILLS

CHICAGO PNEUMATIC
TOOL CP COMPANY
General Offices: 8 East 44th Street, New York 17, N. Y.

★★★★★★★★★
AIR COMPRESSORS
VACUUM PUMPS
DIESEL ENGINES
AVIATION ACCESSORIES

for THIS battle, G.H.Q. is at YOUR own desk!



★ Here's how you—yes, YOU—can carry out a smashing "pincer movement" against the Axis. Swing in on one flank with increased production of war goods! Drive in on the other with redoubled purchases of War Bonds through your Pay-Roll Savings Plan!

You're an officer in both of these drives. Your personal leadership is equally vital to both. But have you followed the progress of your Pay-Roll Savings Plan as closely as you have your production?

Do you know about the new Treasury Department quotas for the current Pay-Roll Allotment Drive? *Quotas running about 50% above the former figures?* You see, these new quotas are based on the fact that the armed forces need more money than ever to win the war, while the average worker has more money than ever before to spend. Particularly so, on a *family income* basis—since in so many families several members are working, now.

Remember, the bond charts of today are the sales curves of tomorrow! Not only will these War Bonds implement our victory—they'll guard against inflation, and they'll furnish billions of dollars of purchasing power to help American business re-establish itself in the markets of peace.

So get this new family income plan working at once. Your local War Finance Committee will give you all the details of the new plan. Act today!



This advertisement prepared under the auspices of the War Advertising Council and the U. S. Treasury Department.

LET'S KEEP ON Backing the Attack!

This Space is a Contribution to America's All-Out War Effort by

AVIATION



ONE of our fighting men writes: "I have used all kinds of Headsets —and Murdock is the best. Murdock can *take it!*"

That's why so many combat pilots order MURDOCK Radio Phones from us, at their own expense.

This ability to *stand up* under toughest conditions is one reason why America's industrial leaders have used MURDOCK for 39 years. MURDOCK Radio Phones guarantee you *supersensitive* reception. Messages come through "clear as a bell" —free from disturbing noises.

These precision-engineered headphones are the *world's keenest radio ears.* Now this battle-tested Headset is ready to serve American Business better than ever before.

Get Full Information on
MURDOCK RADIO PHONES
Write Dept. 32 for Catalogue!

Wm. J. MURDOCK CO.
Chelsea, Massachusetts

Send for
The Complete Story of WET-BELT SURFACING



The Proved Finishing Method that . . .

- produces superior work, 5 to 25 times faster than previous methods.
- holds close limits, often .0005"
- works an entire area at once.
- eliminates dust or grit, injurious to other equipment and to health.
- eliminates heat, warping, distortion, discoloring, fracturing, chipping.
- needs fewer, and only simple, inexpensive jigs.
- cuts set-up time and lock-up time — often eliminates both entirely.
- reduces cost of equipment, operation and maintenance.
- permits inexperienced workers to get increased production and superior finish.
- replaces other machine tools on many operations, and supplements others to improve results.



Porter - Cable's latest booklet "A New Precision Machining Method", gives you complete information on one of the most valuable machining helps for metals, stainless steel, plastics, ceramics, glass, that has come out in years. It can be sent only to those who furnish us their title, company name and address. Mail coupon for your copy today.

PORTER-CABLE

PORTER-CABLE MACHINE CO.
1850-11 N. Salina St., Syracuse, N. Y.
Mail free booklet: A New Precision Machining Method

Name .....
Position .....
Company .....
Street .....
City ..... State .....

DRAFTING ROOM COPIES
with a Flick of the Dial...



every legend, dimension, correction and notation included—every line, every angle exactly reproduced

WITH THE **HUNTER** *Electro*-COPYIST

★ The Hunter Electro-Copyist makes photo-copy tracings direct from pencil originals, on vellum or linen—clear shop prints on durable paper—copies of borrowed prints—as many as you want, as quickly as you want them!

This modern reproduction method makes possible machine-made tracings in multiple—easy alteration of originals—brings back worn, wrinkled tracings—safeguards originals by providing copies for pencil or ink marking or alteration. There is an Electro-Copyist model for every need—from the letter-size to the big units specially developed for the aviation industry that will take originals up to 48" by 168". All are so simple your office boy can operate them.



• Hunter has prepared a booklet that is virtually a treatise on photo-copying applied to industrial needs. Send today for your copy.



There's no copying need too big for a Hunter Electro-Copyist to handle.

HUNTER ELECTRO-COPYIST, INC.
480 S. Warren St., Syracuse, N.Y.

★ ★



New 16-Page Catalog
on
AIRCRAFT RELAYS
and **ACCESSORIES...**

★ **This 16-page catalog gives operating characteristics, dimensional drawings, wiring diagrams, and general construction information on aircraft relays, contactors, solenoids and aircraft accessories. Among the relays described are five variations of the versatile B-2A Relay built to A.A.F. specifications.**


In addition, there are several general purpose aircraft-radio relays; a tiny midget relay weighing less than an ounce; heavyweight and the new lightweight solenoid contactors (A.A.F. types A-3, B-4, B-5A, B-6A, B-7A); eight solenoids; six types of gun switch handles; a control wheel; propeller protractor; and a bomb and flare release.

A request on your company letterhead will bring this catalog to you.

Write Today

GUARDIAN ELECTRIC
1614-MW. WALNUT STREET CHICAGO 12, ILLINOIS
A COMPLETE LINE OF RELAYS SERVING AMERICAN WAR INDUSTRY

★ ★ ★ ★ ★ ★ ★ ★ ★

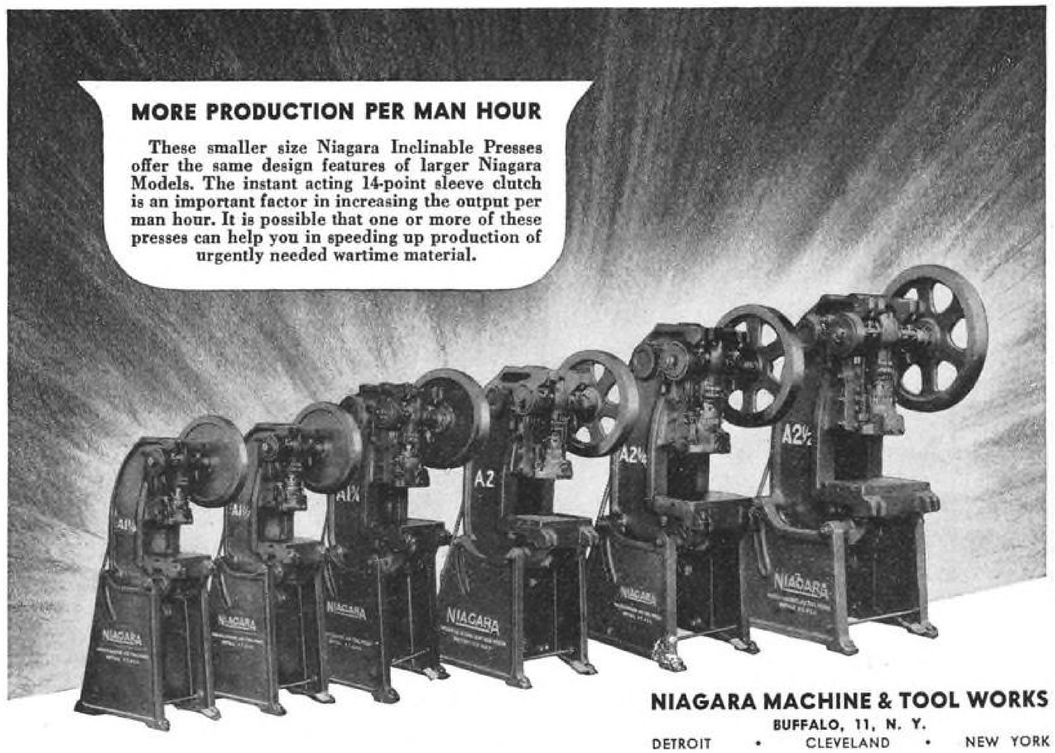

NIAGARA MACHINE & TOOL WORKS
BUFFALO, 11, N. Y.
DETROIT • CLEVELAND • NEW YORK

BUY UNITED STATES WAR BONDS AND STAMPS

A Limited Number of Low-Cost 5-Year Subscriptions Now Available to

AEROSPHERE

THE INTERNATIONALLY RECOGNIZED AERONAUTICAL AUTHORITY
Including the 1942, 1943, 1944, 1945, 1946 Editions

The current edition of **AEROSPHERE** (1942) plus four more years of everything about the whole world's aviation are yours for **$45.00.** You save about $17.50. You get the unfolding history of the means to the world's swiftest transportation—the world's most vital war weapon! All the world's planes, engines, statistics and buyer's guide to be a working tool always at your elbow.

Besides the handsomely designed certificate shown at right, engraved 5½"x8" on 8¼"x11" parchment, you receive the following benefits: 1) An exclusively numbered subscription, 2) Autographed volumes, 3) Your name on the cover, 4) Subscribers get first copies before general sale, and 5) You save substantially.

Note: *This is an excellent Christmas Gift for yourself, customers, or friends in the military services.*



CURRENTLY VITAL AIRCRAFT PUBLICATIONS

1 **AEROSPHERE • 1942.** The latest available material on the whole world's aircraft, engines, aviation armament, statistics and an international buyer's guide. 1156 pages, 1076 illustrations. **$12.50** *plus shipping*

2 **MODERN AIRCRAFT.** A 416-page volume reproducing AEROSPHERE'S photographs and descriptions of the whole world's aircraft. **$7.50** *plus shipping*

3 **MODERN AIRCRAFT ENGINES.** Comprises the photographs, drawings and descriptions of the world's aviation power plants. 240 pages. **$4.00** *postpaid*

4 **GAS TURBINES AND JET PROPULSION FOR AIRCRAFT.** This is the first *and latest* book to deal with propulsion plants employing combustion gas turbine and axial compressor combinations. *By G. Geoffrey Smith, M.B.E.* 56 pages. **$1.25** *postpaid*

Although now in preparation it will be some time before AEROSPHERE • 1943 will be ready for sale. Meanwhile the above are the latest all-inclusive aircraft publications now ready for delivery to you. MAIL THE COUPON AT RIGHT TODAY →

AEROSPHERE • INC.
370 Lexington Avenue, New York 17, N. Y.
Gentlemen: Enclosed is my check. Please enroll me under the ☐ **FIVE YEAR SUBSCRIPTION at $45.00** or send me the volume(s) circled 1 2 3 4

*Name*_____
*Address*_____
*City and State*_____



5 AMPCO METAL Applications in *The Army Sikorsky* Helicopter

...To Assure Safe, Reliable Performance


In advanced engineering development—such as this new sensational aircraft design—Ampco Metal receives generous recognition, indicating the basic importance of this alloy of the aluminum bronze class. Modern design calls for modern alloys—and Ampco bronzes have earned the regard of design engineers in the aviation field because of exceptional performance.

Throughout all industry, parts of Ampco Metal are doing valiant service. In aircraft, ordnance, machine tools, marine service, Ampco Metal meets gruelling service conditions—proves its high strength, hardness, long-wearing characteristics, and general all-around versatility.

Investigate Ampco Metal for use in your equipment—and enjoy the satisfaction and prestige that comes through the "discovery" of a bronze that really solves your metal problems. Ask for free bulletin, "File 41—Engineering Data Sheets."

AMPCO METAL, INC.
Department A-11, Milwaukee, Wisconsin

AMPCO METAL
THE METAL WITHOUT AN EQUAL

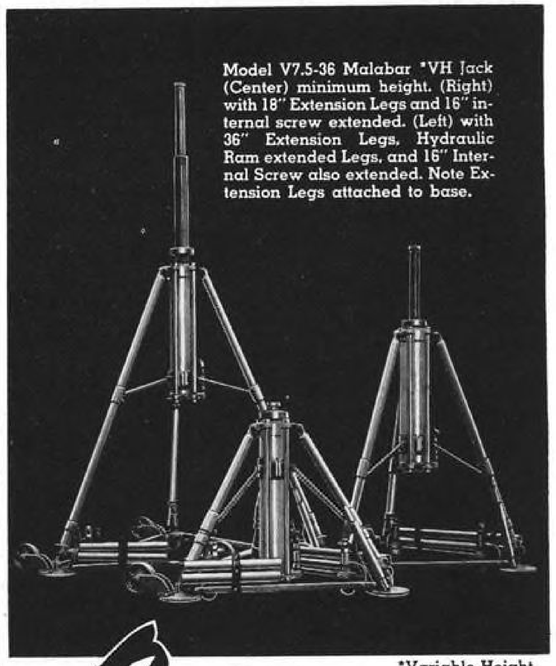

Model V7.5-36 Malabar *VH Jack (Center) minimum height. (Right) with 18" Extension Legs and 16" internal screw extended. (Left) with 36" Extension Legs, Hydraulic Ram extended Legs, and 16" Internal Screw also extended. Note Extension Legs attached to base.

*Variable-Height

One instead of many

Now, ONE model hydraulic Wing Jack, versatile enough to adapt itself to wide variations in aircraft dimensions instead of a different Jack for every different ship.

It's the Malabar *V-H—with 2 sets of quick-adapter extension tripod legs that provide instant increases of 18 inches and 36 inches in minimum vertical heights.

These Malabar Jacks are built in capacities of 5 to 25 tons; minimum heights of 36 to 60 inches, and hydraulic lifts of 24 to 44 inches. Each is equipped with 16-inch internal screw extensions and Malabar patented safety Lock-Nut. The fastest, safest, most reliable Aviation Jacks made.

On the War Front everywhere, Malabar Hydraulic Jacks are serving to shorten the War.

WRITE FOR COMPLETE BULLETIN NO. 102

Malabar
AVIATION JACKS
Never Slip *Never Fail*

MALABAR MACHINE COMPANY • 5720 SANTA FE AVENUE • LOS ANGELES 11


BUY MORE BONDS TO SHORTEN THE WAR

Saving MINUTES BY THE MILLIONS

DILL LOK-SKRUS

AVIATION STANDARD FOR SCREW-LOCKING ANCHOR NUT USES AND METAL TO METAL FASTENINGS

1. **Only ONE drilled hole. No bucking up necessary—no cutting slots**
2. **LOK-SKRU inserted in drilled hole**
3. **As a secure rivet fastened by drawing together with special tool**
4. **As a screw locking anchor nut for fastening of attachments**

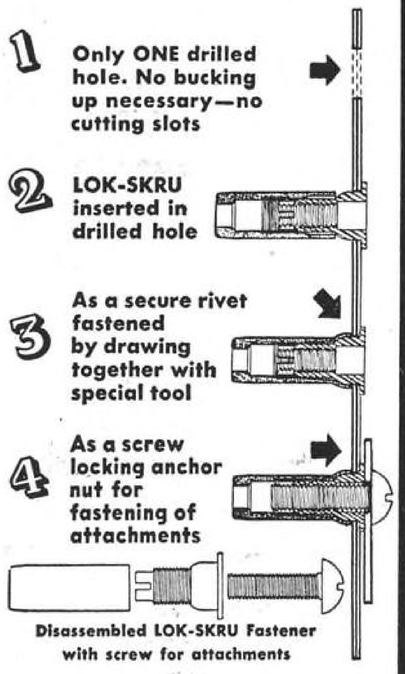

Disassembled LOK-SKRU Fastener with screw for attachments


Saves
MANPOWER
Mounting is a one-man operation.

Speeds up
PRODUCTION
Up to 30 times more production per man-hour.


Increases
STRENGTH
Tests high in tensile and shear.

Reduces
COSTS
Faster application results in lower cost per unit.

SOME TYPICAL APPLICATIONS WITH DILL LOK-SKRUS



Used with corrugations



Attachment of floor to channel **Attachment of Nacelle Tail Cone**

★ Write for Lok-Skru Information Folder

THE DILL MANUFACTURING CO.
700 East 82nd St. CLEVELAND, OHIO
1011 S. Flower St. LOS ANGELES, CALIF.



"OUR POST-WAR PLANNING DEPARTMENT"

For war-time plans or post-war planning, more draftsmen, architects and engineers like and use the Venus Drawing Pencil than any other make.

They know they can *rely* on the strength and smoothness of Venus Drawing. They know that each degree of hardness is exact and *unvarying*—whenever and wherever they buy.



Here's *your* chance to find out for yourself why Venus Drawing is the tops. Just mail us the coupon below—circling the two degrees you would like to try—and we will gladly send you *free* samples.

VENUS *Drawing* **PENCILS**

AMERICAN PENCIL CO. NEW YORK—VENUS—DRAWING—HB

American Pencil Company
Dept. 181, 500 Willow Ave., Hoboken, N. J.
In Canada: Venus Pencil Company, Ltd., Toronto

Please send FREE samples of the two grades circled:
9H - 8H - 7H - 6H - 5H - 4H - 3H - 2H - H - F - HB - B - 2B - 3B - 4B - 5B - 6B

NAME and title _____

FIRM NAME _____

ADDRESS _____

CITY _____ STATE _____

When *Aircraft Assembly* Needs Men 18 Feet Tall · ·

USE Gold Medal WORK STANDS



No matter *what* working height, area and accessibility are called for . . . there will be a Gold Medal Work Stand to fit your specifications. Constructed of steel tubing with welded joints . . . mounted on casters . . . this high level work platform (illustrated) is a tower of strength, portability and safety.

A record of 52 years experience in engineering safety climbing equipment and scaffolding establishes this company's ability to manufacture work stands of highest quality . . . Gold Medal. Write for new Bulletin illustrating many types.

Gold Medal
Safe Ladders and Scaffolding for Every Purpose

THE PATENT SCAFFOLDING CO., INC.
Long Island City, N. Y.: 3821-12th St. ● Chicago, Ill.: 1550 Dayton St.


1550 Dayton St., Chicago 22, Ill. • 3821—12th St., Long Island City 1, N. Y. • 424—428 Commercial St., Los Angeles 12, Calif. • 6168 Bartmer Ave., St. Louis 14, Mo. • 2835 Bridge St., Philadelphia 37, Pa. • 44 Haynes St., N. W., Atlanta 3, Ga. • 270—13th St., San Francisco 3, Calif. • 20 Howard St., Roxbury, Boston 19, Mass. • 837 N. Broadway, Milwaukee 2, Wisc. • 100 N. E. 20th, Terrace, Miami, Fla.



Efficiency
RIVETS POSITIVELY EXPANDED INTO HOLES UP TO .010 INCH OVERSIZE
★

Where only one side of a job is available, it has proved invaluable to all leading aircraft manufacturers, as well as service and repair units, in the United States and Allied countries.

R. HECAT
78-21 QUEENS BLVD.
ELMHURST, L. I., N. Y.

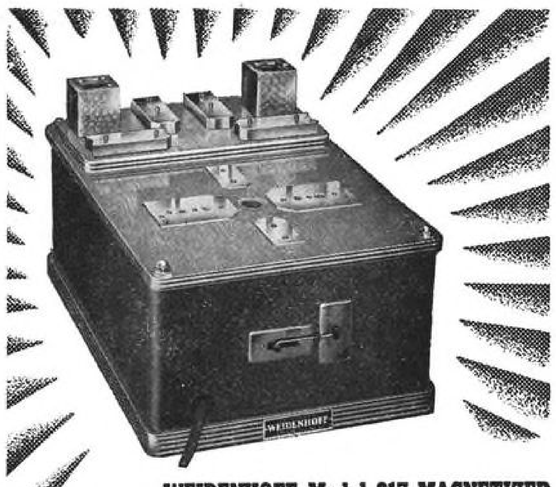

WEIDENHOFF-Model 817 MAGNETIZER

• *For Recharging Magneto Magnets and Rotors*

Efficient. Reliable. Precision engineered and built. Saves time. Accurately ground and polished adapters for charging 2, 4 and 8-pole rotors. Complete magnetos also charged without removing rotors. Operates on 110 volt A. C. current.

CATALOG SHEET AND PARTICULARS UPON REQUEST

Joseph Weidenhoff, Inc. • Chicago, Ill., U.S.A.

WEIDENHOFF
AUTOMOTIVE & AVIATION SERVICE EQUIPMENT

Where *Time* is precious and *Service* imperative



use
WILMINGTON FIBRE



THAT it is uniform in density, in dielectric resistance, in the qualities and characteristics that make for *accurate* machining and lasting service — is the important point. These attributes are the fruit of adequate and controlled curing and processing.

That it is made in the standard shapes — sheets, rods and tubes — and standard sizes, you may take for granted.

The point to remember — now when priorities or directives govern shipments, or later when you will have free choice and prompt deliveries — is that consistent high quality is inherent to the processing, curing and control of genuine vulcanized FIBRE.

WILMINGTON FIBRE SPECIALTY CO.
NEW CASTLE, DEL.



What's aviation training really like?
Are there many crack-ups?
How does it feel to take the first hop?
Do the instructors give you a break?
How's the food?

COME inside the gates of our famous Army Aviation schools for the real story of pilot training as it is today!

An instructive and exciting adventure inside the world of top-notch flyers to-be, crack instructors, the finest planes on earth—told so vividly, it's as though you were there yourself.

TAKE 'ER UP ALONE, MISTER!

234 pages
6 x 9
$2.50
37 full-page photographs

John J. Hibbits
Second Lieutenant, Army Air Forces
as told to **F. E. Rechnitzer**

HERE it is, the book that takes you right in there—Grider, Randolph, Kelly, Tarrant—the great Army aviation training centers—for a first-person, start to finish account of actual training and the lively, human story of the work and hopes of an aviation cadet.

. . . the ingenious tests which discover a man's peculiar aptitudes and help classify him as bombardier, pilot, navigator, trainer . . . memorizing the instrument panel of a BT-14 so thoroughly that each instrument can be recognized blindfold . . . landing 160 feet underground—in a link trainer . . .

It's the authentic story, told for the first time from the inside looking out, and made possible through the cooperation of the Army Air Forces Training Command, permitting the writer to visit the training centers and obtain first-hand information from Lt. Hibbits.

You'll find that the instructors aren't heartless ogres . . . that the Schneider test isn't as tough as the movies have cracked it up to be . . . that it doesn't pay to have indigestion at 30,000 feet . . . !

For all who have a brother, a father, a son in the air force, take 'er up alone, mister! describes more clearly than any number of letters home the actual experiences of these men and their devotion to flying.

Examine a copy free

McGRAW-HILL BOOK COMPANY, INC., 330 W. 42nd St., New York, 18, N.Y.

Send me for 10 days' examination, subject to approval or return, Hibbits—Take 'er up alone, mister! At the end of 10 days I agree to pay $2.50, plus a few cents for postage and delivery, or return the book postpaid. (We pay postage on orders accompanied by remittance.)

Name .....
Address .....
City and State .....
Position .....
Company ..... Av. 11-43



Geared for **WAR** *today —or* **PEACE** *tomorrow*

Through two wars and for almost half a century, The Alexander Milburn Company has been serving Government and Industry. Milburn Equipment may be relied upon for superior, dependable service under stress of the most adverse conditions. Write for Catalog.


The ALEXANDER MILBURN Company

1414 W. BALTIMORE ST., BALTIMORE, MD.

ARNO
TUBE SEAL
No. 700



Pat. Pend.

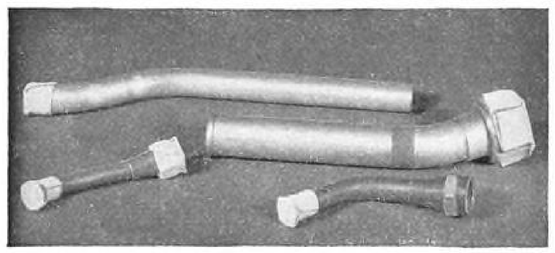

A new, quicker, more reliable method for sealing all sizes of tubing. Made to engineered patterns with fiber disc and special quality adhesive. Easy and quick to apply. Can be removed in an instant, no residue.


Write for samples and price lists of Arno Tube Seals and Industrial Tapes

ARNO ADHESIVE TAPES, Inc.
MICHIGAN CITY, INDIANA

Dillon TENSILE TESTER

★

PORTABLE

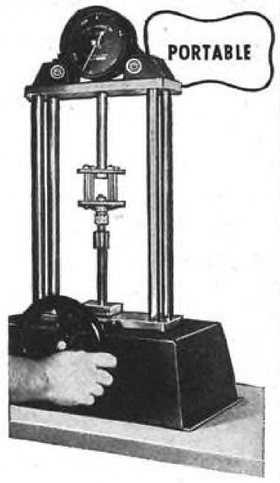

SERVING:

VULTEE • BELL
CHRYSLER • TALON
WESTINGHOUSE
★
CONSOLIDATED
CURTISS-WRIGHT
GENERAL MOTORS
★
U. S. SIGNAL CORPS
PERUVIAN NAVY
REPUBLIC STEEL

Plus
Scores of Others . . .
Testing Many Materials

10,000 POUNDS CAPACITY

Weight: 83 pounds; height: 32 inches—yet allowing all type stress tests up to 10,000 pounds! **Seven capacities available.** Tests wide range of materials. Extremely accurate, easy to operate, low in cost

Write to Dept. "B.A."

W. C. DILLON & CO., INC. 5410 W. HARRISON STREET CHICAGO, ILLINOIS

HAVE YOU
MOVED?

If you've moved recently or are planning a change, let us know now so that copies of Aviation will continue to be delivered to you promptly. Use this coupon or a penny postcard.

Your name .....

Old address .....

City and state .....

New address .....

City and state .....

Company .....

Your title .....

MAIL TO: McGraw-Hill Publishing Co.
Circulation Department
330 West 42nd Street
New York 18, New York

There's an AIRCRAFT APPLICATION for many of the Sealing Materials in the FEL-PRO Material Sample Folder



Gaskets—packing—stripping—grease retainers—all are vital to the successful operation of aircraft engines—planes and ground equipment. That is why you need the Fel-Pro Material Sample Folder. It contains 36 samples of Fel-Pro Sealing Materials—to meet certain specific sealing problems in industrial plants, automotive or aircraft operation—and some of them like Syntoflex today supplying important military needs. Others—like Lignoflex—developed to replace critical materials—have proved more than substitutes—they are new, improved materials, better able to cope with certain sealing conditions. With each specimen are specifications, technical data, suggested applications. This FREE book may contain the answer to your sealing requirements. Send for your copy today.

IF YOU HAVE AN UNUSUALLY DIFFICULT SEALING PROBLEM

write in detail about it, to our Special Development Staff. They will be glad to suggest or develop a material that does the job.

For solutions to problems involving **GASKETS, MOULDING, STRIPPING, MECHANICAL PACKING** *and other types of Sealing Materials*

Put it up to FEL-PRO

FELT PRODUCTS MFG. CO., 1516 Carroll Ave., Chicago, Ill.

FREEDOM
FROM PUMP WORRIES, TOO






TUTHILL PRECISION ASSURES DEPENDABLE PUMP PERFORMANCE

Precision manufacture and carefree performance have earned for Tuthill Pumps a reputation for dependability. Hundreds of thousands of these positive-displacement, internal-gear rotary pumps are in service today—providing freedom from pump worries in coolant, lubrication, hydraulic and liquid transfer applications. Capacities range from 1 to 200 g.p.m. at pressures up to 400 p.s.i. Write for complete catalog on these dependable pumps.

Tuthill builds "fighting pumps" for Army, Navy, Air Force, Merchant Marine

TUTHILL PUMP COMPANY
939 East 95th Street • Chicago 19, Ill.

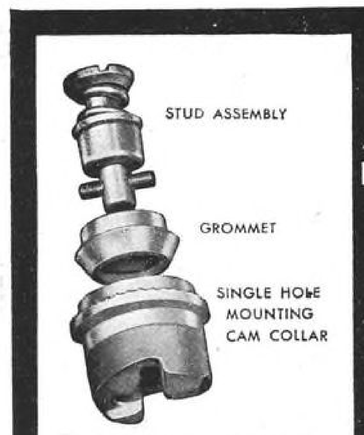

CAMLOC *high-speed* **FASTENERS**

The completeness of the Camloc line enables users to choose parts especially suited to the application. Camloc's single hole Cam Collar is installed in one operation, thereby cutting installation time. Rivet type cam collars are for interchangeability with other fasteners or where limited edge clearance prevents single hole mounting. The floating cam collar allows up to 1/8" misalignment in any direction. All Camloc fasteners are suitable for installation in both metal and plywood. Illustrated booklet upon request.

CAMLOC FASTENER CORP. 420 LEXINGTON AVE., NEW YORK 17, N.Y.



SPEEDING PRODUCTION OF AIRCRAFT PARTS

Aircraft manufacturers must save *time* and *manpower* wherever possible. That's why so many of them are using Heller Staplers in the assembly of parts. There are many Heller Stapling applications such as: fastening rubber gaskets, chutes, insulating strips and canvas. Where metal parts and other materials are to be joined, Heller Staplers can do a faster and better job. Today, industry has Heller Staplers at its command for every wartime need—just as tomorrow, Heller Staplers will answer every peacetime fastening requirement. Write for catalog.

THE HELLER COMPANY



WILLIAMS
SUPERIOR DROP-FORGED QUALITY
DROP-FORGINGS
ANY SHAPE - ANY MATERIAL
COMPLETE FACILITIES
Write today for helpful Forgings Data Folder
J. H. WILLIAMS & CO., BUFFALO, N. Y.
"THE DROP-FORGING PEOPLE"




Will Pull GROB *up* **PRODUCTION**
"THE TOOLMAKERS BEST FRIEND"


Production on the operation illustrated jumped 10009% from three pieces in ten minutes to three pieces in one minute by eliminating a milling operation and using a Grob Filing Machine and the nimble fingers of the young lady. We are anxious to help you solve similar problems. Please write and let us serve you.

GROB BROTHERS
GRAFTON • WISCONSIN

If there is anything you want—
or something you don't want that other readers of this paper can supply—or use—advertise it in
Aviation's Market Place
AVIATION "CLASSIFIED"



CHAMPION GENERATORS
Complete Range of sizes and models
Engine and Wind Driven Types • Electric Direct Cranking Starters
Inquire on Business Letterhead
CHAMPION AVIATION PRODUCTS
LOS ANGELES 15 • CALIFORNIA



WHERE TO BUY

NEW EQUIPMENT—ACCESSORIES—MATERIALS—SUPPLIES

ALLEN REG. U.S. PAT. OFF.
FOR BETTER RESULTS
Sodering, Brazing Welding
FLUXES & SODERS Since '93
L. B. ALLEN CO., INC.
6753 Bryn Mawr Ave., Chicago, 31, Illinois



JACOEL CABLE SPLICER
Full swivel for splicing Aircraft control cables and Hoisting Slings. Cuts time of splicing at least 25%. Removable and adjusting jaws to fit cable sizes 1/16" to 7/16" for Thimbles or Bushings. Can be used for Production or Field Work. In use by U. S. Government, Aircraft Factories, Ship Yards, Aviation Schools and Industrial Field.
Write for descriptive Bulletin
I. JACOEL CABLE SPLICING EQUIPMENT CO.
1880 Hertel Ave., Buffalo, N. Y.

STANDARD AIRCRAFT FINISHES
Since 1913
TITANINE
TITANINE INC. UNION, N. J.

THE FEDERAL SKI
FEDERAL AIRCRAFT WORKS Mpls. Minn.
APPROVED ALL METAL LIGHT WEIGHT SKIS and MECHANICAL RIGGE FOR ALL MAKES AND MODELS OF AIRPLANES

Quick Deliveries
"AN" BRASS FITTINGS
911-6 914-6 842-16
911-10 914-8 842-17
CENTRAL BRASS MFG. CO.
2950 E. 55th St. Cleveland, O.

Find what you are looking for? If this or other advertising in this issue does not supply the information wanted, of products or service, write
AVIATION - 330 W. 42 St., N. Y. 18, N. Y.

AIRCRAFT *Designing, Development & Production*
AIRCRAFT ASSEMBLIES FABRICATED. WE SPECIALIZE IN DEVELOPMENT WORK.
SCALE MODELS PRODUCED TO ORDER.
SEND US YOUR SPECIFICATIONS.
ROWE INDUSTRIES, INC. 3120 MONROE ST. TOLEDO, OHIO

FITZGERALD GASKETS
FOR AIRCRAFT ENGINES
GASKET CRAFTSMEN FOR 37 YEARS
Write for information
THE FITZGERALD MANUFACTURING COMPANY
TORRINGTON, CONN.
BRANCHES CHICAGO AND LOS ANGELES
CANADIAN FITZGERALD, LTD., TORONTO

FITZGERALD GASKETS
THE COMPLETE LINE THAT COMPLETELY SATISFIES

Harmeco
LUBE-A-PLANE
HARMAN EQUIPMENT CO. LUBE-A-PLANE LOS ANGELES, CALIF.
Trade Mark Reg. U. S. Pat. Off.



Series 1000
6 Barrel—4 Wheel
Lube-A-Plane

DISPENSES OIL, GASOLINE FROM REFINERY BARRELS


For fast efficient servicing all types aircraft. Demountable dispensing units are equipped with electric motor gasoline engine or hand operated pumps. Auxiliary hand pump attachment available with power operated units. All these units interchangeable . . . fit standard trailer. Handles gasoline, diesel fuel, etc., at 15 G.P.M. at all prevailing temperatures. Electric heating elements for pumping heavy oil below 40° F. Rugged construction . . . hinged hitch at both ends. Four wheel steering. Double swing flexible suction arm reaches all six barrel openings. Low trailer bed—"one-man" loading. Other Lube-A-Planes, 2 or 4 barrel types with interchangeable power or hand pumps, handle heavy oil down to 10° F. without heating.

Write for Harmeco Bulletin 443

Specify LUBE-A-PLANE
HARMAN EQUIPMENT COMPANY
937 Santa Fe Ave., Los Angeles 21, Calif.

★ ★ ★ ★ ★ ★
For 40 Years
PREFERRED AS A SOURCE OF STAMPINGS
1903 - 1943
Literature on Request
WHITEHEAD
EST. 1903
WHITEHEAD STAMPING CO.
1665 W. Lafayette Blvd., Detroit 16, Mich.

DYKEM STEEL BLUE
STOPS LOSSES
making dies & templates



simply brush on right at the bench; ready for the layout in a few minutes. The dark blue background makes the scribed layout lines show up in sharp relief, and at the same time prevents metal glare. Increases efficiency and accuracy.
Write for full information
THE DYKEM COMPANY, 2303-A North 11th St., St. Louis, Mo.
In Canada: 444 Pacific Ave., Toronto, Ont.

DELICATE **MACHINING OPERATIONS**
A Specialized Service



The machining of aircraft engine parts to the superfine tolerances necessary to the perfect functioning of today's highly complicated war machines is the type of service in which we specialize. Our long experience in precision machining also enables us to perform experimental work requiring the highest degree of exactitude.

Write Us Concerning Your Requirements!

THE GOVRO-NELSON COMPANY
1931 Antoinette Detroit, Mich.

AVIATION'S MARKET PLACE

(POSITION VACANT)

Your Post War Job Production Engineer

We are a manufacturer now engaged in war work, with over 35 years of successful experience behind us.

When the war is over, the production of quality peace-time products at a minimum of cost will be every manufacturer's problem.

If you have had a position the last several years with an aircraft or other manufacturer which has given you a broad production experience with new materials, new processes and new methods, we would like to discuss with you now the possibility of your joining our organization when V day comes. Let's get acquainted now to see whether your knowledge of manufacturing methods, sheet metal fabrication, welding, brazing, your education, etc., are what we will need.

Even though satisfied in your present position, the nature of the industry in which you are now employed may warrant your thinking of a permanent connection when peace is won.

Replies will be kept in strict confidence. Our own employees know about this advertisement. Write P-823, Aviation, 330 W. 42nd St., New York City.

WANTED

FOREMAN

AIRCRAFT WOOD MODELS

Must have extensive aircraft experience in building wind tunnel and other models. Write full details of qualifications to

McDONNELL AIRCRAFT CORP.

1703 Locust St. St. Louis, Mo.

Sales Engineer Aviation Products

leaving for extensive trip through South and Central America wishes to take on two or three non-competitive aircraft products on commission basis. Many years experience and excellent contacts in Latin American countries and thorough speaking knowledge of Spanish and Portugese. Purpose of trip is to make survey of present and post war aviation business and acquire desirable orders from responsible companies.

RA-824, Aviation
330 W. 42nd St., New York 18, N. Y.

POSITIONS WANTED

INDEPENDENT HELICOPTER DESIGNER desires opportunity and maintenance salary to work out new ideas superior to those already undertaken by other designers. Will need assistance on detail of plans and on construction. Age is 27, draft classification 4-F, and available. For information write N. V. Timmerman, Box 501, Cincinnati 1, Ohio.

PRINTING ENGINEER AVAILABLE — Practical experience in all phases of production including technical aeronautical type matter, cover designs, and formats—School Executive—Trained in conference leadership—Commercial Art. PW-826, Aviation, 330 W. 42nd St., New York 18, N. Y.

REBUILDING

AIRCRAFT BATTERIES rebuilt. New Plates and separators. Your case cover and costs. Let us quote Bowers Battery Mfg. Co., Inc., Reading, Pa.

FOR SALE

FOR SALE—90 Franklin—less than 100 hours' total time—just reconditioned by authorized Franklin Service. Complete with starter, generator and fuel pump. Price $600.00. Contact P. H. Spencer, Mills Industries, Incorporated, 4100 Fullerton Avenue, Chicago. Phone: Capital 4000.

NEW TIRES: 8.00x4, 6.00x6, 7.00x4, two-ply $8.75, four $10.75. Tubes $3.25. We wholesale and carry large stocks. Propellers, Spark Plugs, Batteries, Tailwheel Assemblies, Windshield Pyralin. Bob Trader Aero Supply, Municipal Airport, Pittsburgh, Pa.

BUSINESS OPPORTUNITIES

WANTED AIRCRAFT MANUFACTURER interested in development and manufacture of changeable camber full cantilever wing. Box 846, Station #5, P. O. Miami, Florida.

FOR SALE Patented Outstanding Hydraulic Development. Subject—engine driven aircraft pumps, of constant and variable displacement type. Class—medium and high pressure. BO-825, Aviation, 520 N. Michigan Ave., Chicago 11, Ill.

BOOKS

AIRCRAFT Hydraulic Systems — Attention, students, mechanics, engineers, draftsmen: complete information on design, testing and maintenance of commercial and military hydraulic installations. A specialized branch of aeronautics for you to get into now for only $2.50. Aircraft Specialties, 134 S. Waler Ave., Chicago, Ill.



Something New

Air Navigator Log Book

At last . . . available to all airmen, is our new AIR NAVIGATOR LOG BOOK. For the celestial air navigator on trans-oceanic flights—or for all pilots making "dead reckoning" flights across country, the "Navigator Log Book" will provide a permanent record of your navigational flights. Handsome blue leatherette (full pocket size) $2.00

PAN-AMERICAN NAVIGATION SERVICE

12021 Ventura Boulevard
NORTH HOLLYWOOD, CALIFORNIA

BOOKS

PRESENTING—A New Book for students of Aircraft and Aircraft Engine Mechanics. 2000 multiple-choice questions each with 5 alternate answers covering all phases of aircraft and engine mechanics' ratings. Answer keys included. $3.00 postpaid or C.O.D. Paxon Publications, Box 666, St. Paul, Minn.

WORK WANTED

WANTED: Subcontracting on intricate aircraft parts and assemblies. Modern machine shop and tool room; certified welding of all types; expert sheet metal, woodwork and engineering personnel. 48,000 sq. ft. of floor space available. Experienced in aircraft and engine manufacturing. At present, prime contractor to Army & Navy and subcontractors to various other aircraft manufacturers on hydraulic equipment. For further information, contact J. Farkas, General Manager, Plant #1, Commonwealth Aircraft, Inc., Kansas City, Kansas.

LEGAL NOTICE

STATEMENT OF THE OWNERSHIP, MANAGEMENT, CIRCULATION, ETC., REQUIRED BY THE ACTS OF CONGRESS OF AUGUST 24, 1912, AND MARCH 3, 1933

Of Aviation, published monthly at Albany, N. Y., for October 1, 1943.

State of New York)
County of New York (ss.

Before me, a Notary Public in and for the State and county aforesaid, personally appeared Joseph A. Gerardi, who, having been duly sworn according to law, deposes and says that he is the Secretary of the McGraw-Hill publishing Company, Inc., publishers of Aviation and that the following is, to the best of his knowledge and belief, a true statement of the ownership, management (and if a daily paper, the circulation), etc., of the aforesaid publication for the date shown in the above caption, required by the Act of August 24, 1912, as amended by the Act of March 3, 1933, embodied in section 537, Postal Laws and Regulations, printed on the reverse of this form, to wit:

1. That the names and addresses of the publisher, editor, managing editor, and business managers are: Publisher, McGraw-Hill Publishing Company, Inc., 330 West 42nd St., N. Y. C. 18, Editor, Leslie E. Neville, 330 West 42nd St., N. Y. C. 18, Managing Editor, E. E. Miller, 330 West 42nd St., N. Y. C. 18, Business Manager, Frank Dannhauser, 330 West 42nd St., N. Y. C. 18.

2. That the owner is: (If owned by a corporation, its name and address must be stated and also immediately thereunder, the names and addresses of stockholders owning or holding one per cent or more of total amount of stock. If not owned by a corporation, the names and addresses of the individual owners must be given. If owned by a firm, company, or other unincorporated concern, its name and address, as well as those of each individual member, must be given.) McGraw-Hill Publishing Company, Inc., 330 West 42nd St., N. Y. C. Stockholders holding 1% or more of stock: James H. McGraw, 330 West 42nd St., N. Y. C. James H. McGraw, Jr., 330 West 42nd St., N. Y. C. James H. McGraw, James H. McGraw, Jr., and Curtis W. McGraw, Trustees for: Harold W. McGraw, James H. McGraw, Jr., Donald C. McGraw, Curtis W. McGraw, 330 West 42nd St., N. Y. C. Curtis W. McGraw, 330 West 42nd St., N. Y. C. Edwin S. Wilsey and Curtis W. McGraw, Madison, New Jersey, Trustees for James H. McGraw, 3rd., Curtis W. McGraw, 330 West 42nd St., N. Y. C. Donald C. McGraw, 330 West 42nd St., N. Y. C. Anne Hueus Britton, 330 West 42nd St., N. Y. C. Mildred W. McGraw, Madison, New Jersey. Grace W. Mehren, 73 No. Country Club Drive, Phoenix, Arizona. Wilson C. Laucks, 1501 Cleveland Avenue, Wyomissing, Pennsylvania.

3. That the known bondholders, mortgagees, and other security holders, owning or holding 1 per cent or more of total amount of bonds, mortgages, or other securities are: (If there are none, so state.) None.

4. That the two paragraphs next above, giving the names of the owners, stockholders, and security holders, if any, contain not only the list of stockholders and security holders as they appear upon the books of the company but also, in cases where the stockholder or security holder appears upon the books of the company as trustee or in any other fiduciary relation, the name of the person or corporation for whom such trustee is acting, is given; also that the said two paragraphs contain statements embracing affiant's full knowledge and belief as to the circumstances and conditions under which stockholders and security holders who do not appear upon the books of the company as trustees, hold stock and securities in a capacity other than that of a bona fide owner; and this affiant has no reason to believe that any other person, association, or corporation has any interest direct or indirect in the said stock, bonds, or other securities than as so stated by him.

5. That the average number of copies of each issue of this publication sold or distributed, through the mails or otherwise, to paid subscribers during the twelve months preceding the date shown above is. (This information is required from daily publications only.)

J. A. GERARDI, Secretary.

McGRAW-HILL PUBLISHING COMPANY, INC.

Sworn to and subscribed before me this 29th day of September, 1943.

[SEAL] EMILY Z. SHEPARD.

Notary Public, New York County, New York Clerk's No. 768, N. Y. Co. Reg. No. 4S1275.

(My commission expires March 30, 1944)

ADVERTISERS IN THIS ISSUE

Linear Packing & Rubber Co. 301
Littelfuse, Inc. 395
Lockheed Aircraft Corp. 39
Logan Engineering Co. 188
Lombard Governor Corp. 436
Long Co., W. H. 327
Lycoming Mfg. Corp. 77
Lyon-Raymond Corp. 40

MacDermid, Inc. 258
Mahon Co., The, R. C. 27
Malabar Machine Co., Inc. 450
Mallory and Co., P. R. 18
Martin Co., The Glenn L. 379
Maytag Co., The 182
McAleer Mfg. Co. 433
McGraw-Hill Book Co. 440-453
McRae's Blue Book 323
Mercury Aircraft, Inc. 311
Meyercord Co., The 336
Milburn Co., The Alexander 454
Miniature Precision Bearings 319
Morganite Brush Co. 413
Muehlhausen Spring Corp. 14
Murdock Mfg. Co. 447

National Machine Products 425
National Screw and Mfg. Co., Inc. 49-462
National Tube Co. 102-344
New Departure 206
New England Screw Co. 462-327
New York Air Brake Co., The 428
Niagara Machine Tool Works 449
Norgren Co., C. A. 285
Norma-Hoffmann Bearings Co. Insert-156
North American Aviation, Inc. 19
North Bros. Mfg. Co. 244
Northrop Aircraft, Inc. 256
Norton Co. 180

Ohmite Mfg. Co. 298
Olofsson Tool and Die Co. 305
Onan and Sons, D. W. 324
O'Neil-Irvin Mfg. Co. 327

Pacific Airmotive 97
Panelyte Division of St. Regis Paper Bag Co. 375
Parker Co., The Charles 462
Parker-Kalon Corp. 462-59
Patent Scaffolding Co., Inc., The 452
Peck Springs & Screw Machine Products 442
Pawtucket Screw Co. 462
Pencil Sales Dept. Joseph Dixon Crucible Co. 337
Perey Turnstile Co. 324
Perfect Circle Companies, The 358-359
Permoflux Corp. 293
Persons Corp., L. M. 367
Pesco Products Co. ..... Insert 38
Pheoll Mfg. Co. 462
Phillips Screw Mfg. 59-462
Pioneer Instrument ..... Back Cover
Pioneer Parachute Co., Inc. 82
Piper Aircraft Corp. 7
Plywood Inc. 420
Plomb Tool Co. 281

Porter Cable Machine Co. 447
Poulsen-Nardon, Inc. 65
Pratt and Whitney Aircraft, Div. of United Aircraft Corp. ..... Front Cover
Pressed Steel Co., The 296
Presstite Engineering Co. 176
Purolator Products, Inc. 416

Radiator Specialty Co. 286
Radio Corp of America 69
Ramsey Accessories Mfg. Corp. 103
Radio Wire Television, Inc. 315
Raybestos 29
Reading Screw Co. 462
Reeves Bros. Inc. 308
Reliable Spring & Wire Forms Co. 300
Reliable Electric Co. 434
Republic Aviation Corp. 218
Republic Steel Corp. 98
Reynolds Metals Co. ..... Insert 227
Roberts Rubber Co., Weldon 444
Rodic Rubber Corp. 317
Roddis Lumber & Veneer Co. 334
Roebling's Sons Co., John A. 380-381
Rohm and Haas Co. 330
Roller Bearing Co. of America 408
Romec Pump Co. 76
Rowe Industries, Inc. 446
Rustless Iron & Steel Corp. 272
Russell, Birdsall and Ward Bolt and Nut Co. 462
Ryan Aeronautical Co. 214
Ryerson and Son, Inc., Joseph T. 239

Schatz Mfg. Co., The 41
Scott Aviation Corp. 420
Scovill Mfg. Co. 462-407
Searle Aero Industries, Inc. 74
Sensenich Brothers 352
Severance Tool Industries, Inc. 104
Shakeproof, Inc. 462
Shell Oil Co., Inc. 349
Silent Hoist Winch & Crane Co. 331
S. K. F. Industries, Inc. 354
Skilsaw, Inc. 249
Snap-On Tools Corp. 78
Socony-Vacuum Oil Co., Inc. 44
Solar Aircraft Co. 79
South Bend Lathe Works 355
Southington Hardware Mfg. Co. 462
Spartan School of Aeronautics 322
Spencer Thermostat Co. 397
Square D Co.—Kollsmans Instrument Div 160
Standard Conveyor Co. 417
Standard Pressed Steel Co. 422-423
Steel Improvement & Forge Co., The 350
Stewart-Warner Corp. 34-35-372
Struthers-Dunn, Inc. 33
Studebaker Corp., The 362
Sturtevant Co., P. A. 331
Sunnen Products Co. 341
Summerill Tubing Co. 283
Superior Tube Co. 80
Switlik Parachute Co. 42
Swan Engineering Co. 320

Tannewitz Works, The 243
Taylor Fibre Co. 73
Teleoptic Co., The 426
Texas Company, The 321
Thomas & Betts Co., The 415
Thurston Cutting Corp. 394
Time, Inc. 385
Timken Roller Bearing Co., The 120-259
Timber Structures, Inc. 414
Tinnerman Products, Inc. ..... Second Cover
Titanine, Inc. 446
Tobe Deutschmann Corp. 204
Torrington Co., The 360
Tube Turns, Inc. 164-165
Turco Produ ts, Inc. 427
Turner Gauge Grinding Co. 303
Tuthill Pump Co. 455

Union Oil Co. of California 294
United States Plywood Corp. 312
United States Rubber Co. ..... Insert 173-174B-175
United States Steel Corp., Subsidiaries 36-102-344
United States Steel Supply Co. 344
United States Steel Export Co. 36-102-344
United States Tool & Mfg. Co. 411

Valentine & Co., Inc. 200
Van Der Horst Corp. of America 32
Vard, Inc. 314
Vickers, Inc. 313
Vinco Corp. 342
Vokes, Ltd. 400

Waldes Koh-I-Noor, Inc. 66
Walker-Turner Co., Inc. 346
Walter Motor Truck Co. 424
War Savings Bonds 446
Weems System of Navigation 429
Weldon Tool Co. 320
Weidenhoff, Inc., Joseph 452
Wellman Co., The S. K. 366
Westinghouse Electric and Mfg. Co. 43
Weston Electrical Instrument Corp. 351
Where To Buy 456
Whitehead Stamping Co. 457
White-Rodgers Electric Co. 168
Whiting Corp. ..... Insert 91
Whitney Screw Co. 462
Whitney Chain and Mfg. Co., The 302
Wiggins Oil Tool Co., Inc., E. B. 45
Wilcox Electric Co. 187
Williams and Co., J. H. 456
Wiley & Sons, Inc., John 316
Wilmington Fibre Specialty Co. 453
Wilson Co., H. A. 390
Wilson Welder & Metal Co., Inc. 47
Wittek Mfg. Co. 23
Winchester Repeating Arms Co. 50
Wolf's Head Oil Refining Co. 75
Worthington Mower Co. 356
Wright Aeronautical Corp. ..... Insert 155-191
Wyman Gordon 282

Young Radiator Co. 438

★ ★ ★

SCHOOLS


Curtiss-Wright Technical Institute 90
Embry Riddle School of Aviation 403
Hamilton Institute, Alexander 332
Indiana Technical College 459
Sparton School of Aeronautics 322

AVIATION'S MARKET PLACE
(CLASSIFIED ADVERTISING)

BOOKS 458-459
BUSINESS OPPORTUNITIES 458
EMPLOYMENT (Positions Wanted and Vacant) 458
FOR SALE 458-459
PROFESSIONAL SERVICES 459

(CLASSIFIED DISPLAY ADVERTISING)

Aero Trades Co. 459
Lancaster, Allwine & Rommel 459
McDonnell Aircraft Corp. 458
Pan American Navigation Service 458, 459
Pester's 459
Philadelphia Rust Proof Co. 459
Snyder Aircraft Corp. 459
Standard Aircraft Equipment Co. 459

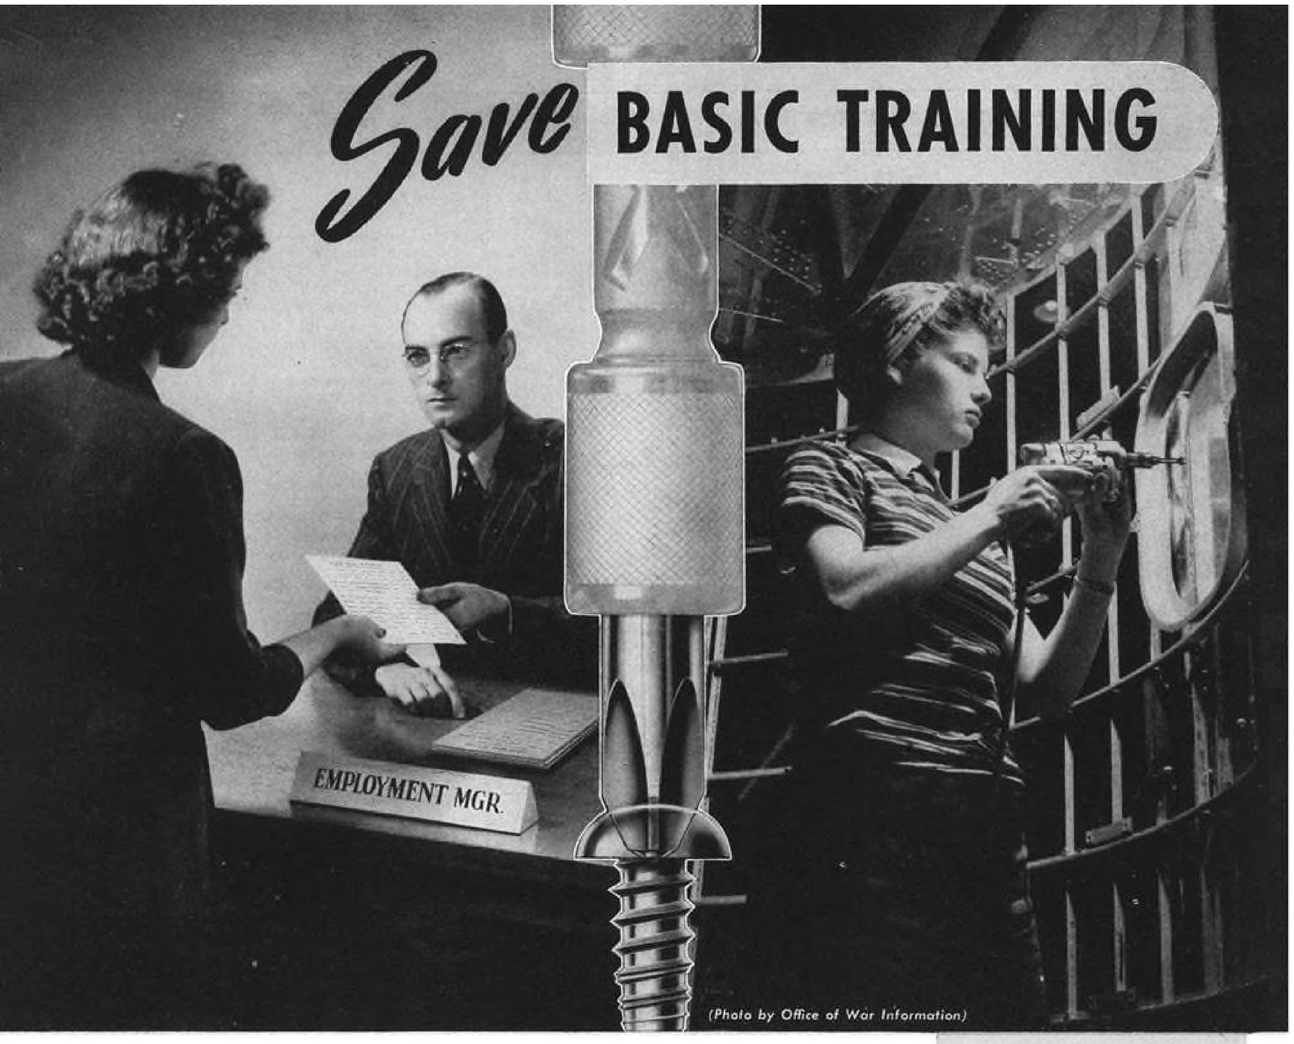

(Photo by Office of War Information)

for Your Screw Driving Army

NO PRACTICE NEEDED TO DRIVE PHILLIPS SCREWS...

It's no problem to replace men who have left your screw driving army for the fighting front, *if you use Phillips Recessed Head Screws.* Anybody can "take over", without training, and do a good job!

The scientifically designed Phillips Recess makes screw driving fool-proof. It automatically centers the driving force and eliminates all driving troubles . . . fumbling, wobbly starts . . . slant-driven screws . . . burred and broken screw heads . . . and dangerous screw driver skids.

Screw and driver "become one unit", making such efficient use of turning power that driving is much easier and faster, regardless of driving method. And, power driving is made practical.

Compare the cost of driving Phillips and slotted head screws. You'll find that it actually costs less to have the advantages of the Phillips Recess!

KEY TO FASTENING SPEED AND ECONOMY

The Phillips Recessed Head was scientifically engineered to afford:

Fast Starting – Driver point automatically centers in the recess . . . fits snugly. Screw and driver "become one unit." Fumbling, wobbly starts are eliminated.

Faster Driving – Spiral and power driving are made practical. Driver won't slip out of recess to injure workers or spoil material. (Average time saving is 50%.)

Easier Driving – Turning power is fully utilized by automatic centering of driver in screw head. Workers maintain speed without tiring.

Better Fastenings – Screws are set-up uniformly tight, without burring or breaking heads. A stronger, neater job results.




PHILLIPS *Recessed Head* SCREWS

WOOD SCREWS • MACHINE SCREWS • SELF-TAPPING SCREWS • STOVE BOLTS


21 SOURCES

American Screw Co., Providence, R. I.
The Bristol Co., Waterbury, Conn.
Central Screw Co., Chicago, Ill.
Chandler Products Corp., Cleveland, Ohio
Continental Screw Co., New Bedford, Mass.
The Corbin Screw Corp., New Britain, Conn.
The H. M. Harper Co., Chicago, Ill.
International Screw Co., Detroit, Mich.
The Lamson & Sessions Co., Cleveland, Ohio
The National Screw & Mfg. Co., Cleveland, Ohio
New England Screw Co., Keene, N. H.
The Charles Parker Co., Meriden, Conn.
Parker-Kalon Corp., New York, N. Y.
Pawtucket Screw Co., Pawtucket, R. I.
Pheoll Manufacturing Co., Chicago, Ill.
Reading Screw Co., Norristown, Pa.
Russell Burdsall & Ward Bolt & Nut Co., Port Chester, N. Y.
Scovill Manufacturing Co., Waterville, Conn.
Shakeproof Inc., Chicago, Ill.
The Southington Hardware Mfg. Co., Southington, Conn.
Whitney Screw Corp., Nashua, N. H.



A DOW MAGNESIUM SERVICE — FORGINGS



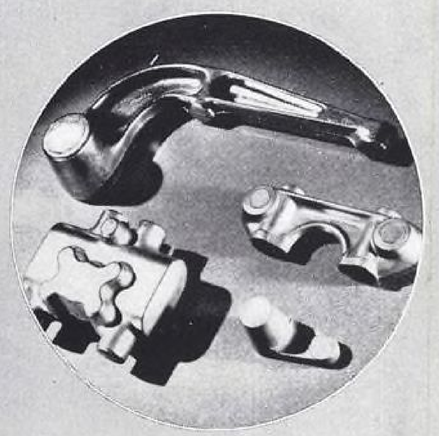

Dowmetal Magnesium alloy forgings for aircraft produced in hydraulic press forging equipment.

FACILITIES—KNOWLEDGE—EXPERIENCE

The production of Dowmetal Magnesium Alloy press forgings is included in Dow's over-all magnesium service. Full cooperation, backed by complete facilities and intimate knowledge, is available to manufacturers engaged in war work or who are contemplating peacetime projects.

Magnesium forgings possess a desirable combination of strength, light weight and pressure tightness. A complete line of both mechanical and hydraulic presses makes available magnesium forgings in a wide range of sizes.

Because of long experience in the production of magnesium and its fabrication in all forms, Dow is the recognized source of information on this weight-saving metal. If you are dealing with magnesium, consult Dow.

THE DOW CHEMICAL COMPANY, MIDLAND, MICHIGAN

New York • Cleveland • Chicago • St. Louis • Houston • San Francisco
Los Angeles • Seattle

MAGNESIUM

PRODUCER SINCE 1916

DOWMETAL

FROM INGOTS TO FINISHED PRODUCTS

INGOTS • CASTINGS • FORGINGS • SHEET • STRIP • PLATE • EXTRUSIONS

Superhuman "Lungs" for Stratospheric Flight . . .

To men flying at high altitudes, oxygen means life. As a consequence, oxygen regulators must be completely dependable . . . and responsive under all conditions of operation. Every step in the manufacture and testing of Pioneer* Demand Oxygen Regulators accordingly reflects the ultimate in precision and exactitude. For example: Inside the "cold box," which reproduces the stratospheric temperature of −67° F, the functioning of this vital device is scrupulously checked under a wide range of operational conditions. This test is typical. Equally rigid control through every phase of production assures the superior quality and performance of Pioneer Instruments. Eclipse-Pioneer Division, Teterboro, N. J.



THE PIONEER DEMAND OXYGEN REGULATOR automatically mixes and supplies air and oxygen in the varying percentages required for different altitudes . . . including the undiluted element at altitudes requiring pure oxygen. An extremely important member of "The Invisible Crew" . . . now speeding to world battle fronts from the more than thirty Bendix plants.

PIONEER INSTRUMENTS

THE INVISIBLE CREW
Precision Equipment by
Bendix Aviation Corporation

*TRADE MARK OF BENDIX AVIATION CORPORATION