MAY 1944
50 CENTS PER COPY

AVIATION

The Oldest American Aeronautical Magazine

IN THIS ISSUE

YOUR AIRCRAFT MARKETS

— First of a series giving state-by-state analysis of aircraft marketing potential.

★

PACKAGED AIRPORTS

— Buildings and equipment to suit all needs, prefabricated, shipped by air if desired.

★

FLYING BOAT ECONOMICS

— Another strong case for the flying boat in the postwar global transport picture.

★

THE DE HAVILLAND "MOSQUITO"

—Aviation's sixth design analysis giving comprehensive details of a leading airplane.

★

AIRFOIL PRESSURE DISTRIBUTION

— Practical wind tunnel technique outlined in detail.

★

AIRCRAFT PLUMBING STANDARDS EQUIVALENTS

— Nineteen pages of charts for use in conversion of plumbing fittings.

★

FIGHTER PILOTS AND CREW CHIEFS

— Close cooperation saves time and makes for greater squadron fighting efficiency.

★

RESORTS AND FLYING FACILITIES

— A money making combination offering wide opportunities for fixed base operators.

McGRAW-HILL
PUBLISHING COMPANY, INC.

Corsair - FIRE POWER

Vought engineers designed the Corsair as a better-than-400-m.p.h. gun platform. The result is a fighter of unusual stability, able to keep true on the target while unleashing the fire of six .50-caliber guns.

Superior take-off, climb, altitude, speed, range, fire power, all combine to make the Corsair an outstanding fighter.

ARMY E NAVY

CHANCE VOUGHT AIRCRAFT
STRATFORD, CONNECTICUT
ONE OF THE FOUR DIVISIONS OF UNITED AIRCRAFT CORPORATION

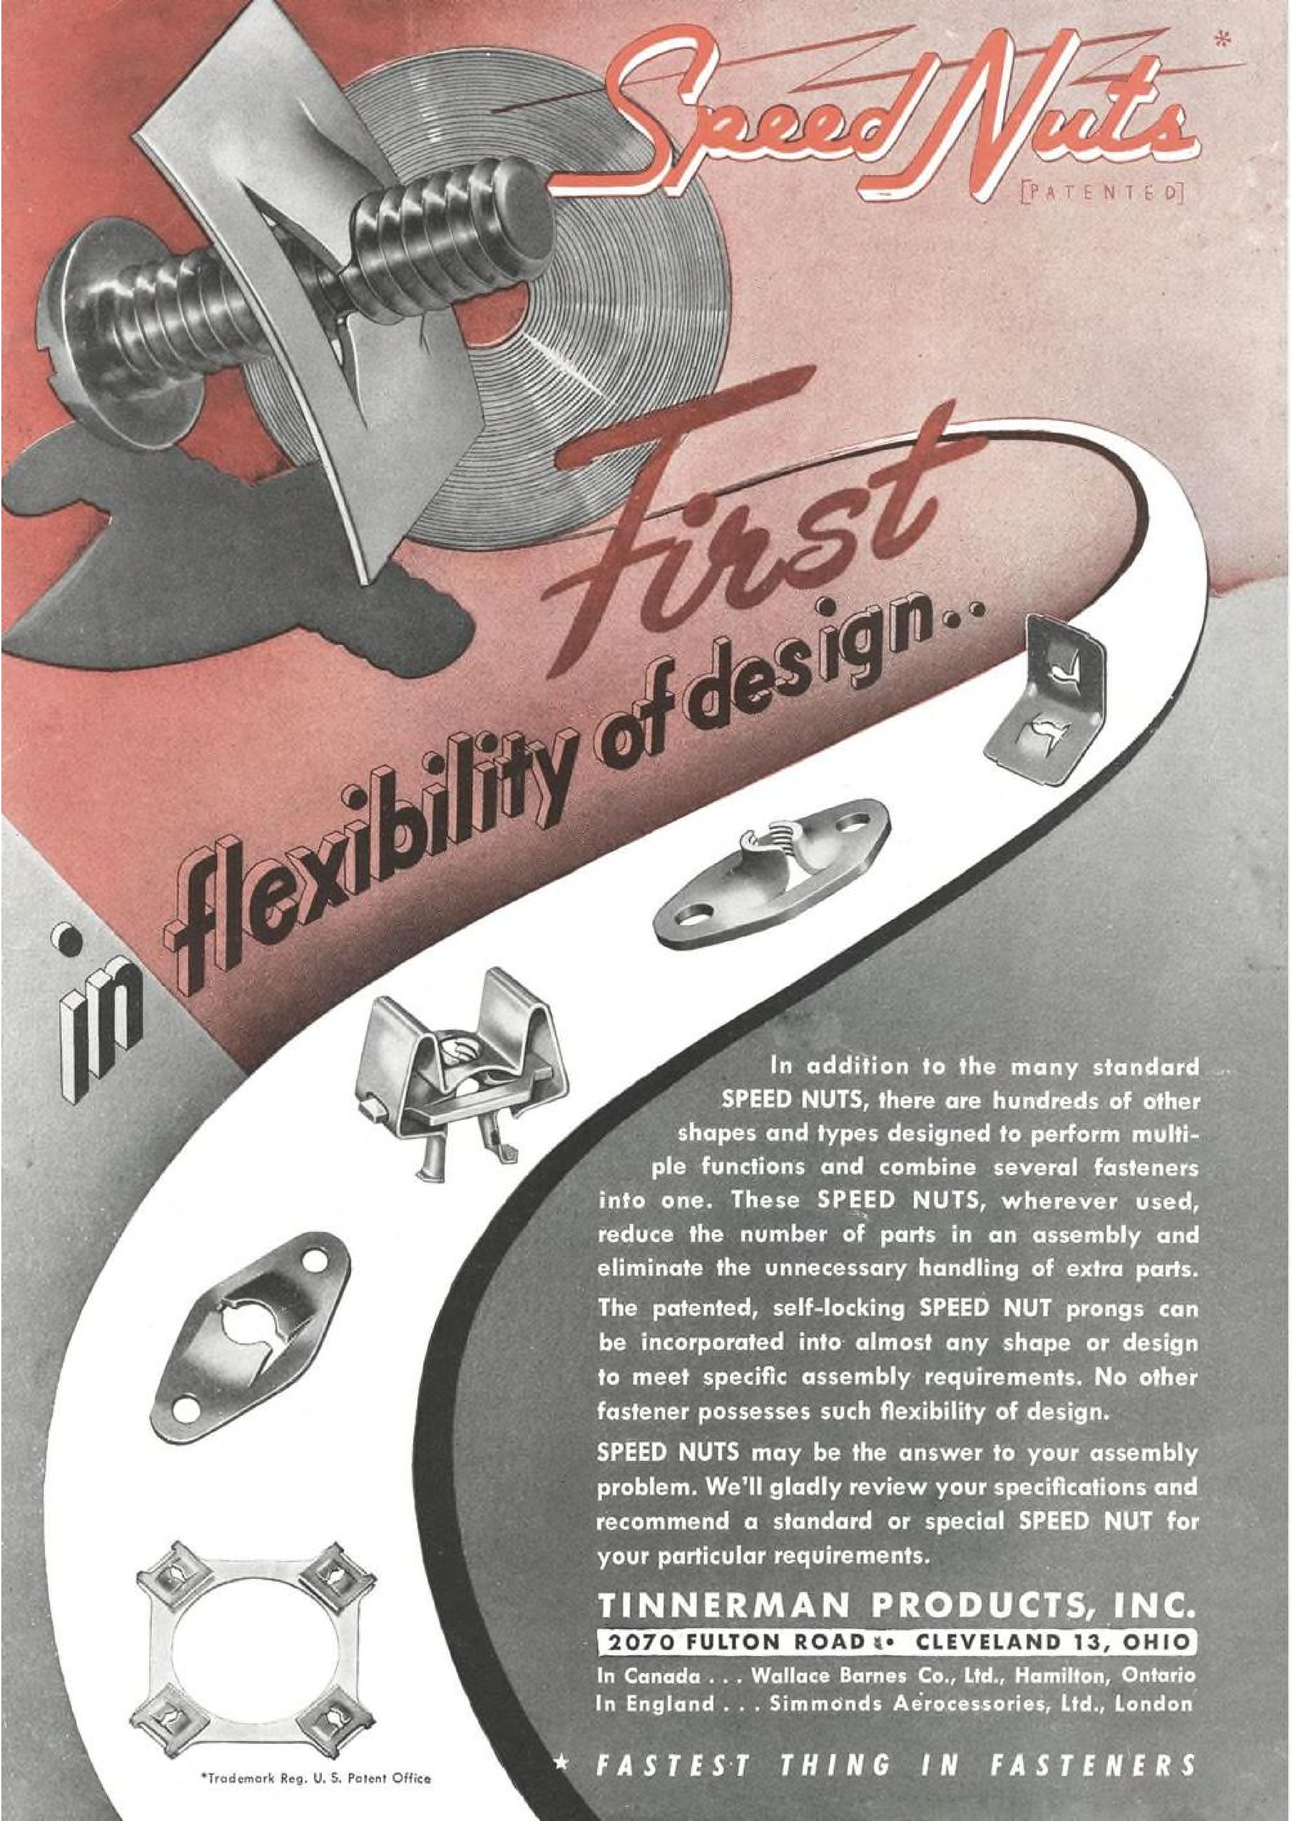

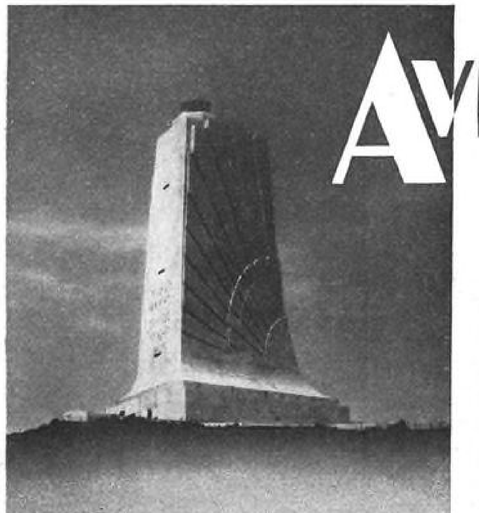

AVIATION

CONTENTS FOR MAY, 1944

Volume 43 • Number 5

Briefing for May ... 5
Down the Years in Aviation's Log ... 5
Editorial: The Critics Stand Refuted ... 109
Here Are Your Markets ... *John Foster, Jr.* 110
Now . . . "Packaged" Airports ... *J. L. de Cubas* 116
A Ballot for the Flying Boat ... *Capt. C. S. Schildhauer* 119
I Saw Russia's Air Power ... *George D. Ray* 122
Keying Market Research to the Aircraft Industry ... *E. E. Lothrop* 124

Aviation Manufacturing

Design Analysis No. 6. The deHavilland *Mosquito* ... *Chester S. Ricker* 127
Methods for Determining Airfoil Pressure Distribution ... *Monroe A. Maller* 141
From Billet To Blade ... 145
Approach to the Problem of Radio Precipitation Static, II. ... *C. J. Breitwieser* 151
Graphic Simplifications in Computing True Airspeed ... *Richard G. Smith* 154
Precision Angle Plates "Bypass" Trigonometry ... 156
Analytical Geometry for Speedier Wing Lofting, III ... *R. W. Feeny* 162
Intercooling Problems in Airplane Design ... *Holley B. Dickinson* 192
Review of Patents ... *A. Harry Crowell* 192
Aviation's Engineering Data Book ... 195
Aviation's Sketch Book of Design Detail ... 199
New Products and Practices ... 227

Maintenance

Equivalent Charts for Aircraft Plumbing Fittings—They Speed Standardization at American Airlines ... 165

Air Transport

Looking Ahead to Air Cargo Markets, II ... *Robert K. Kinzel* 185

Military

"Peashooters" Should be Troubleshooters, Too ... *Lt. John S. Miller, AC* 187

Civil Operation and Training

Airport *Plus* Resort *Equals* New Business ... 190

Side Slips ... 125

The Aviation News

National Aviation ... 205
Washington Windsock ... 209
Calling Names ... 210
War Communique No. 29 ... 213
Aviation Manufacturing ... 215
Transport Aviation ... 218
Book Reviews ... 219
Aviation Abroad ... 221
Financial Notes ... 223
Aviation People ... 225

George W. Pfeil, *Publisher* — Leslie E. Neville, *Editor*

E. Eugene Miller ... *Managing Editor*
John Foster, Jr. ... *Associate Editor*
Herb Powell ... *News Editor*
Raymond Hoadley ... *Financial Editor*
Wm. R. Nelson ... *West Coast Editor*
Blaine Stubblefield ... *Washington Editor*
Dallas Mallard ... *Art Editor*
Paul Wooton ... *Chief of Washington Bureau*

★ ★ ★

On Leave of Absence With Government Services

Carl Norcross ... *Colonel, Air Forces*
Jay P. AuWerter ... *Captain, Air Forces*
Charles F. McReynolds ... *Maior, Air Forces*
Randolph Hawthorne ... *Captain, Air Forces*
Kenneth D. Reynolds ... *Lieut., Infantry*
David Baker ... *Private, Air Forces*
Don Fink ... *Special Assignment*

★ ★ ★

Andrew B. Martin, *Sales Manager*

District Managers: Boston, Hunter Snead; New York, Robert F. Boger; Philadelphia, G. A. Aherns and E. M. Schellenger; Cleveland, A. H. Bartsch and E. O. Wayne; Detroit, C. W. Evaul; Chicago, A. E. Moanor; St. Louis, W. E. Donnell; Los Angeles, E. W. Potter; San Francisco, John Otterson.

McGRAW-HILL PUBLISHING CO., INC. Publication office, 99-129 North Broadway, Albany, N. Y. Return postage guaranteed. Editorial and executive offices, 330 West 42nd Street, New York, 18, N. Y. Branch offices: Chicago, 520 North Michigan Ave.; San Francisco, 68 Post Street; Aldwych House, Aldwych, London, W.C. 2; National Press Bldg., Washington; 16 South Broad St., Philadelphia; Hanna Bldg., Cleveland; 2-144 General Motors Bldg., Detroit; Paul Brown Bldg., St. Louis; 1427 Statler Bldg., Boston; Rhodes-Haverty Bldg., Atlanta; 601 W. 5th St., Los Angeles; 738-9 Oliver Bldg., Pittsburgh. JAMES H. McGRAW, Founder and Honorary Chairman; JAMES H. McGRAW, Jr., President; HOWARD EHRLICH, Executive Vice-President for Business Operations; JOHN ABBINK, Executive Vice-President for Editorial Operations; CURTIS W. McGRAW, Vice-President and Treasurer; JOSEPH A. GERARDI, Secretary; J. E. BLACKBURN, Jr., Director of Circulation, Aviation, 330 W. 42nd Street, New York. Published monthly, price 50c a copy, 50c in Canada. Allow at least ten days for change of address. All communications about subscriptions should be addressed to Director of Circulation, 330 West 42nd Street, New York. Subscription rates—United States, Mexico and Central American Countries, $3.00 a year, $4.00 for two years, $5.00 for three years. Canada, $3.50 for one year, $5.00 for two years, $6.00 for three years, payable in Canadian currency at par. Great Britain and British Possessions 30 shillings per year, 60 shillings for three years. All other countries, $5.00 a year, $10.00 for three years. Entered as second-class matter September 3, 1936, at the Post Office, Albany, New York, under the Act of March 3, 1879. Volume 43, Number 5. Printed in U. S. A. Cable Address: "McGraw-hill New York." Member A.B.C.

Copyright 1944 by McGraw-Hill Publishing Company, Inc., 330 West 42nd Street, New York N. Y. The contents of this issue are copyrighted and may not be reproduced without the permission of the copyright owner.

The following publication is combined with AVIATION: AERONAUTICAL ENGINEERING AIRCRAFT JOURNAL. All rights to this name are reserved by the McGraw-Hill Publishing Co. Aviation is indexed in Guide to Periodical Literature and in Industrial Arts Index.

life

Balancing a dynamotor...

Maetta Lambert knows why each armature that goes into the Altair* dynamotors must be patiently balanced. Miss Lambert has two brothers in the service.

Altair* dynamotor armatures are balanced both statically and dynamically as but one of many tests and inspections of this precision product before it is installed in the vital electrical, communication and radio equipment manufactured by Pacific Division.

With a 28-volt input, Model 3971 Altair* Dynamotor has an overall efficiency in excess of 50%. Maintenance has been simplified by the use of interchangeable end-bells and by coding all major components for easy assembly. Service is necessary only each 1000 hours of operation. Write for complete specifications and data. Pacific Division, Bendix Aviation Corporation, North Hollywood, Calif. Sales engineering offices in St. Louis, Dayton and New York.

The new trade name of Pacific Division, Bendix Aviation Corporation.

Typical of the use being made of Altair dynamotors is the compact installation being made in Interphone Amplifier equipment which the Pacific Division supplies for many fighting planes.

Pacific Division
Bendix Aviation Corporation
(Formerly Bendix Aviation, Ltd.)
NORTH HOLLYWOOD, CALIF.

Bendix Aviation Corporation
DESIGNERS AND MANUFACTURERS OF RADIO AND HYDRAULIC EQUIPMENT — OUR PART OF THE INVISIBLE CREW
© 1944, Pacific Division, Bendix Aviation Corp.

Briefing for May

Aircraft markets comprise a $64 question and their determination is probably the most sought after image in the great game of postwar crystal ball gazing. Associate Editor Foster rejects the gazing principle in this issue and begins a comprehensive state-by-state region-by-region survey, analyzing basic data needed to calculate aircraft distribution potential in every part of the country. This important series—the first of its kind to be published for the industry—begins on page 110.

We are now entering the age of prefabrication and it is bound to have a revolutionary effect on our social and economic existence. The aviation industry is more than keeping pace, and now Westinghouse Electric International presents—wrapped in a ribbon, if you like—a packaged airport! Yessir, everything from plumbing to terminal buildings in infinite combinations to suit all requirements. You can have it delivered air express, too. Shall we wrap it, sir? For details on this engineering miracle see page 116, then be sure to discard the word "can't" from your vocabulary.

Last month, Capt. C. H. Schildhauer, of the Naval Air Transport Service, realistically sized up the global air transport routes of the future and advanced his technical reasons for the flying boat's coming into its own. After that thorough and severe salvo, he now steams in with *coup de grace* torpedoes in the form of economics to show that the flying boat boasts advantages over the land plane in the coming race for low cost international transport. The hits are scored on page 119.

Judging by the way letters constantly pour in urging us to "keep up" our famous "design analyses," you'd think we intended to stop them. Not a chance. We know how valuable they are, and furthermore it's darned interesting work. You readers have led us into a vicious trap with your enthusiastic response. The editors are hell-bent for "out-analyzing" each other. Result: Bigger and better design analyses. Detroit Editor Ricker really extended himself in his job on the famed deHavilland *Mosquito,* which begins on page 127. So much so, in fact, that we just had to break it into two installments, the second to be published next month. Packed with superbly executed sketches and supported by most comprehensive text, this engineering treatise is an important addition to your growing design library.

Wind tunnel technique comes under the heading of "basic research," (see editorial on page 109). Determination of airfoil pressure distribution is one of the important employments of wind tunnels. Practical step-by-step procedure for conducting this research is outlined by Monroe Maller, of Hughes Aircraft, on 141.

Sir Geoffrey deHavilland, *whose famous Mosquito bomber is described in Aviation's 6th Design Analysis on page 127. (From a painting by Oswold Birley.)*

Chevrolet and Frigidaire have teamed up—with a striking degree of efficiency—to produce Hamilton Standard propellers. Complete details of their high-production procedure is outlined "From Billet To Blade" (page 145).

Radio precipitation static is further discussed in the second installment of C. J. Breitwieser's article—page 151. Present methods of noise reduction are treated, and indications of probable final solutions to the problem are given.

A great many factors are involved in the determination of true airspeed. Richard G. Smith, of United Aircraft, offers a set of nomographs which give positive solutions in a minimum of time (page 154).

The advent of AN standards for aircraft tube, pipe, and hose fittings presents a problem when operators wish to change over in the interests of standardization. American Airlines has prepared a series of charts giving standards equivalents, and we present them in their entirety, beginning on page 165. They are invaluable guides to engineers and maintenance men.

A fighter pilot would seem to have enough to do without being a mechanical troubleshooter, too. Yet, Lt. John S. Miller returns from the South Pacific with some practical advice for new pilots on the value of knowing the airplane and being able to diagnose trouble when it occurs. It saves incalculable maintenance man-hours and makes for a far more efficient fighting unit. His story is on page 187.

Down the Years in AVIATION'S Log

25 Yr. Ago (1919)—NC-4 seaplane (Lt. Comdr. A. C. Read, USN) flies in stages from Newfoundland to Plymouth, Eng. . . . Hawker and Grieve, starting for Ireland from Newfoundland, are forced down in Atlantic and picked up by Danish steamer. . . . Navy orders six Loening monoplanes for catapult launching from battleships. . . . Army considers transcontinental test flight. . . . First Holland air show held in Amsterdam. . . . Curtiss Corp. buys 2,176 airplanes and 4,608 engines from government for redistribution. . . . U. S. Army airship A-4 lands passengers on roof of Cleveland hotel. . . . Lt. Roget and Capt Coli, French Air Service, fly non-stop from Paris to Morocco, 1,116 mi. in 11 hr. 50 min.

15 Yr. Ago (1929)—Congress introduces bill authorizing loan to manufacturers of scarce aeronautical design and research equipment. . . . Elinor Smith of Freeport, L. I., N. Y., stays in air 26 hr. 21 min., breaking women's record. . . . Curtiss-Robertson plant turns out 16 planes per week. . . . Boeing turns out 165-mph., *Wasp*-engine "fighter type" sport plane. . . . Newly formed Curtiss-Caproni Corp. starts factory at Baltimore. . . . Army LB-7 twin-engine bomber flies from Dayton, "bombs" New York city, and returns to base (1,544 mi. non-stop, refuelling twice in air). . . . Army expedition leaves to make aerial survey of Alaska . . . Rickenbacker announces Allison Engineering Co. will spend $1,000,000 for airplane engine plant. . . . Stinson announces plans for 400-plane output for 1929. . . . Navy opens 1-yr. ground school course at University of California. . . . Newark Airport Realty Co. formed to finance building Newark, N. J., airport.

10 Yr. Ago (1934)—Sikorsky S-42 climbs to 21,800 ft. with 11,000-lb. payload. . . . Post Office issues new air-mail contracts to civilian contractors. . . . German Foreign Minister says Fatherland's expenditure of $63,000,000 on aviation was for airline development only. . . . William Thaw, first American commander of Lafayette Escadrille, dies in Pittsburgh. . . . TWA inaugurates N. Y.-Pittsburgh run. . . . American Airways announces sleeper service between Dallas, Ft. Worth, and Los Angeles.

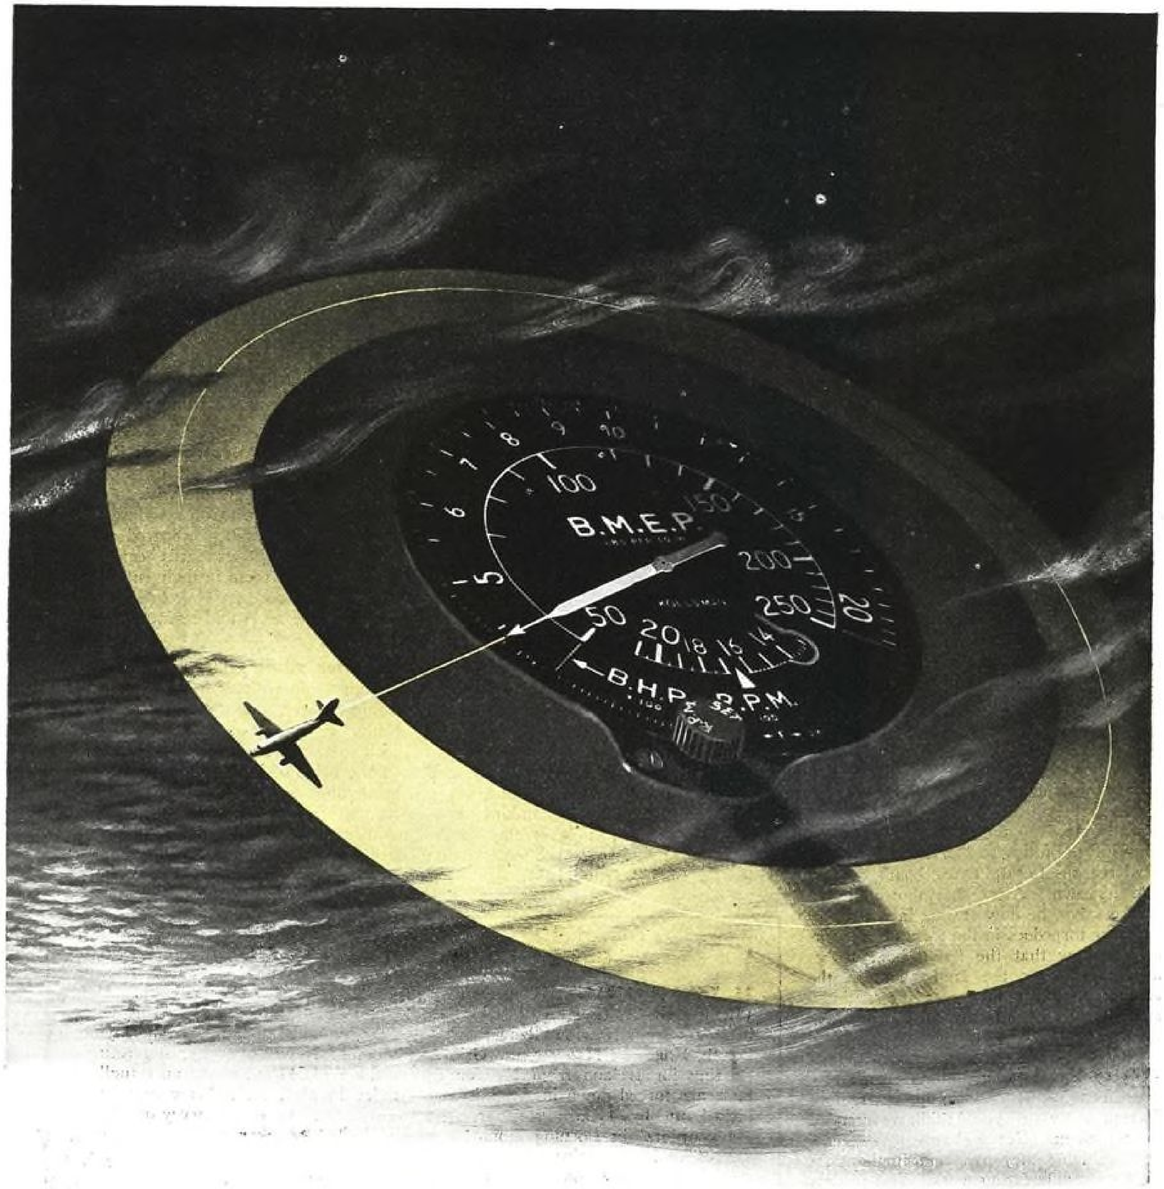

INCREASED RANGE for civil and military aircraft through more precise power output control is the objective of Kollsman development in engine instruments. That is the function of the new Kollsman Horsepower Indicator. Activated by the hydraulic torque balance unit of the propeller reduction gear, it permits direct reading of B.M.E.P. and, when R.P.M. is set on a sub-dial, net shaft horsepower is also read directly. The instrument was developed in coöperation with N.A.C.A. and leading engine manufacturers.

KOLLSMAN AIRCRAFT INSTRUMENTS

PRODUCT OF

SQUARE D COMPANY

ELMHURST, NEW YORK GLENDALE, CALIFORNIA

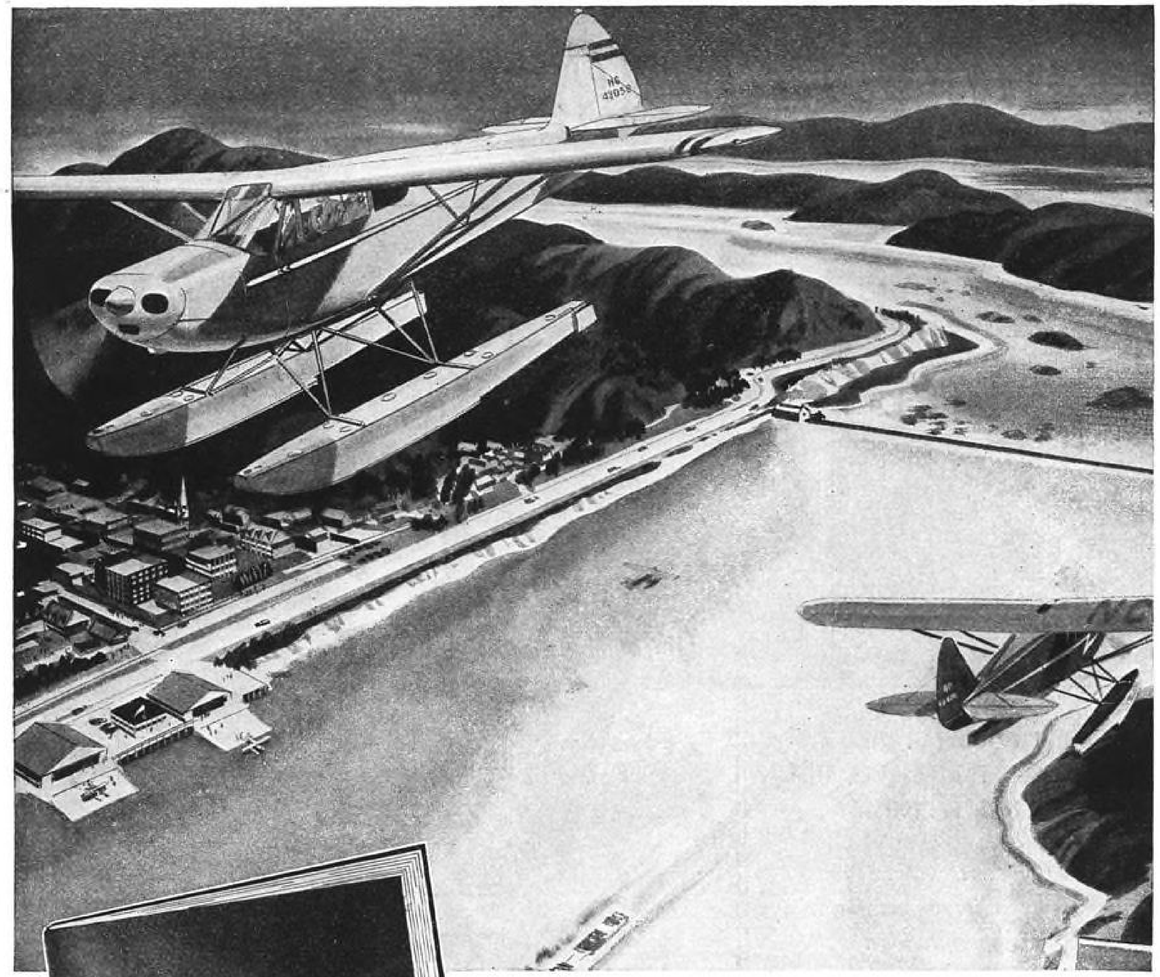

Get This Free Booklet

Describing Landing Facilities for Your Town

The river seaplane base, illustrated above, is one of several types of landing facilities illustrated and described in the new booklet, "What Your Town Needs for the Coming Air Age".

You, as an aviation enthusiast, realize the importance of landing facilities to the future of your town, its business enterprises and all its citizens. This new booklet, prepared to meet the increasing demand for information, will help you and your town officials in laying practical plans for your own landing area. You'll find it full of workable ideas, sound advice and logical thinking. Get your free copy now—show it to your town officials. Write Piper Aircraft Corporation, Department A54W, Lock Haven, Pennsylvania.

ALSO GET YOUR AVIATION BOOKLET—"Piper Cub . . . In War and In Peace". Full color, 32 pages. Covers history of light plane, Piper Cub planes, coming air age, how to fly. Enclose 10c in stamps or coin for postage-handling. Write Piper Aircraft Corporation, Department A54, Lock Haven, Pennsylvania.

16mm. SOUND FILM—"The Construction of a Light Airplane". For distribution points write: Supervisor, Audio-Visual Aids, Extension Services, Pennsylvania State College, State College, Pennsylvania.

PIPER *Cub*

Points the Way to Wings for All Americans

Trail Blazing in the Skies

PIONEERING NEW METHODS

NEW PRECISION IN MEASURING CABLE TENSIONS — Illustrative of Goodyear Aircraft Corporation's thoroughness in every phase of airplane construction is the development of the precision cable-tension indicator. This highly accurate instrument, built by Goodyear, measures the exact tension on airship and airplane control cables, giving an instant reading correct to the pound. With this device the cable does not have to be disconnected, making it possible to determine tensions precisely after installation. Many of these instruments are now being used by the air services.

HOW GOODYEAR AIRCRAFT CORPORATION SERVES THE AIRCRAFT INDUSTRY

1. *By constructing subassemblies to manufacturers' specifications.*
2. *By designing parts for all types of airplanes.*
3. *By re-engineering parts for mass production.*
4. *By building complete airplanes and airships.*
5. *By extending the facilities of Goodyear Research to aid the solution of any design or engineering problem.*

BUILDING PROVEN AIRCRAFT

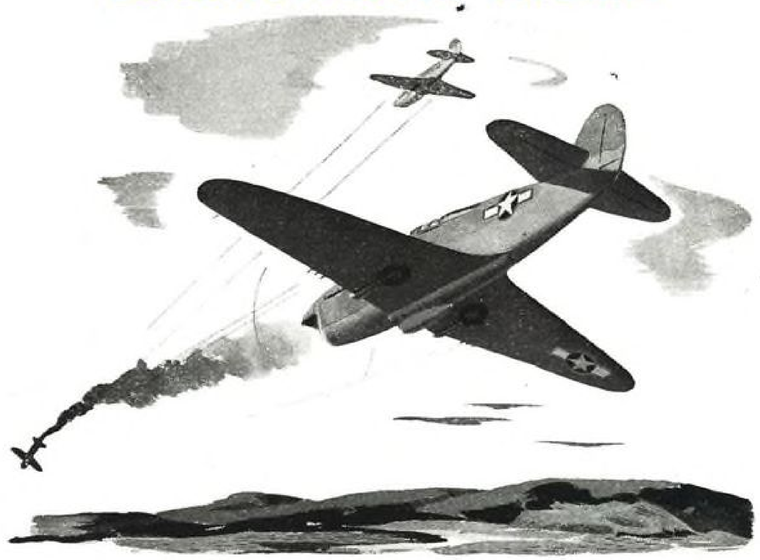

THE RELIABLE P-40 WARHAWK is one of America's famous warplanes built in part by Goodyear Aircraft. Several thousand P-40's have flown into action with stabilizers that came from Goodyear assembly lines. Goodyear is proud that its long experience in aviation has contributed materially to the sturdiness of this rugged fighter — only one of many equipped with Goodyear-built wings, empennages, flaps, ailerons and numerous other components. Goodyear also builds complete airplanes and airships for the Navy.

BUY WAR BONDS BUY FOR KEEPS

GOODYEAR AIRCRAFT

NOW BRAKE HEADQUARTERS PRESENTS THE

SINGLE DISC BRAKE

New, simpler, lighter — the ultimate brake for many types of airplanes!

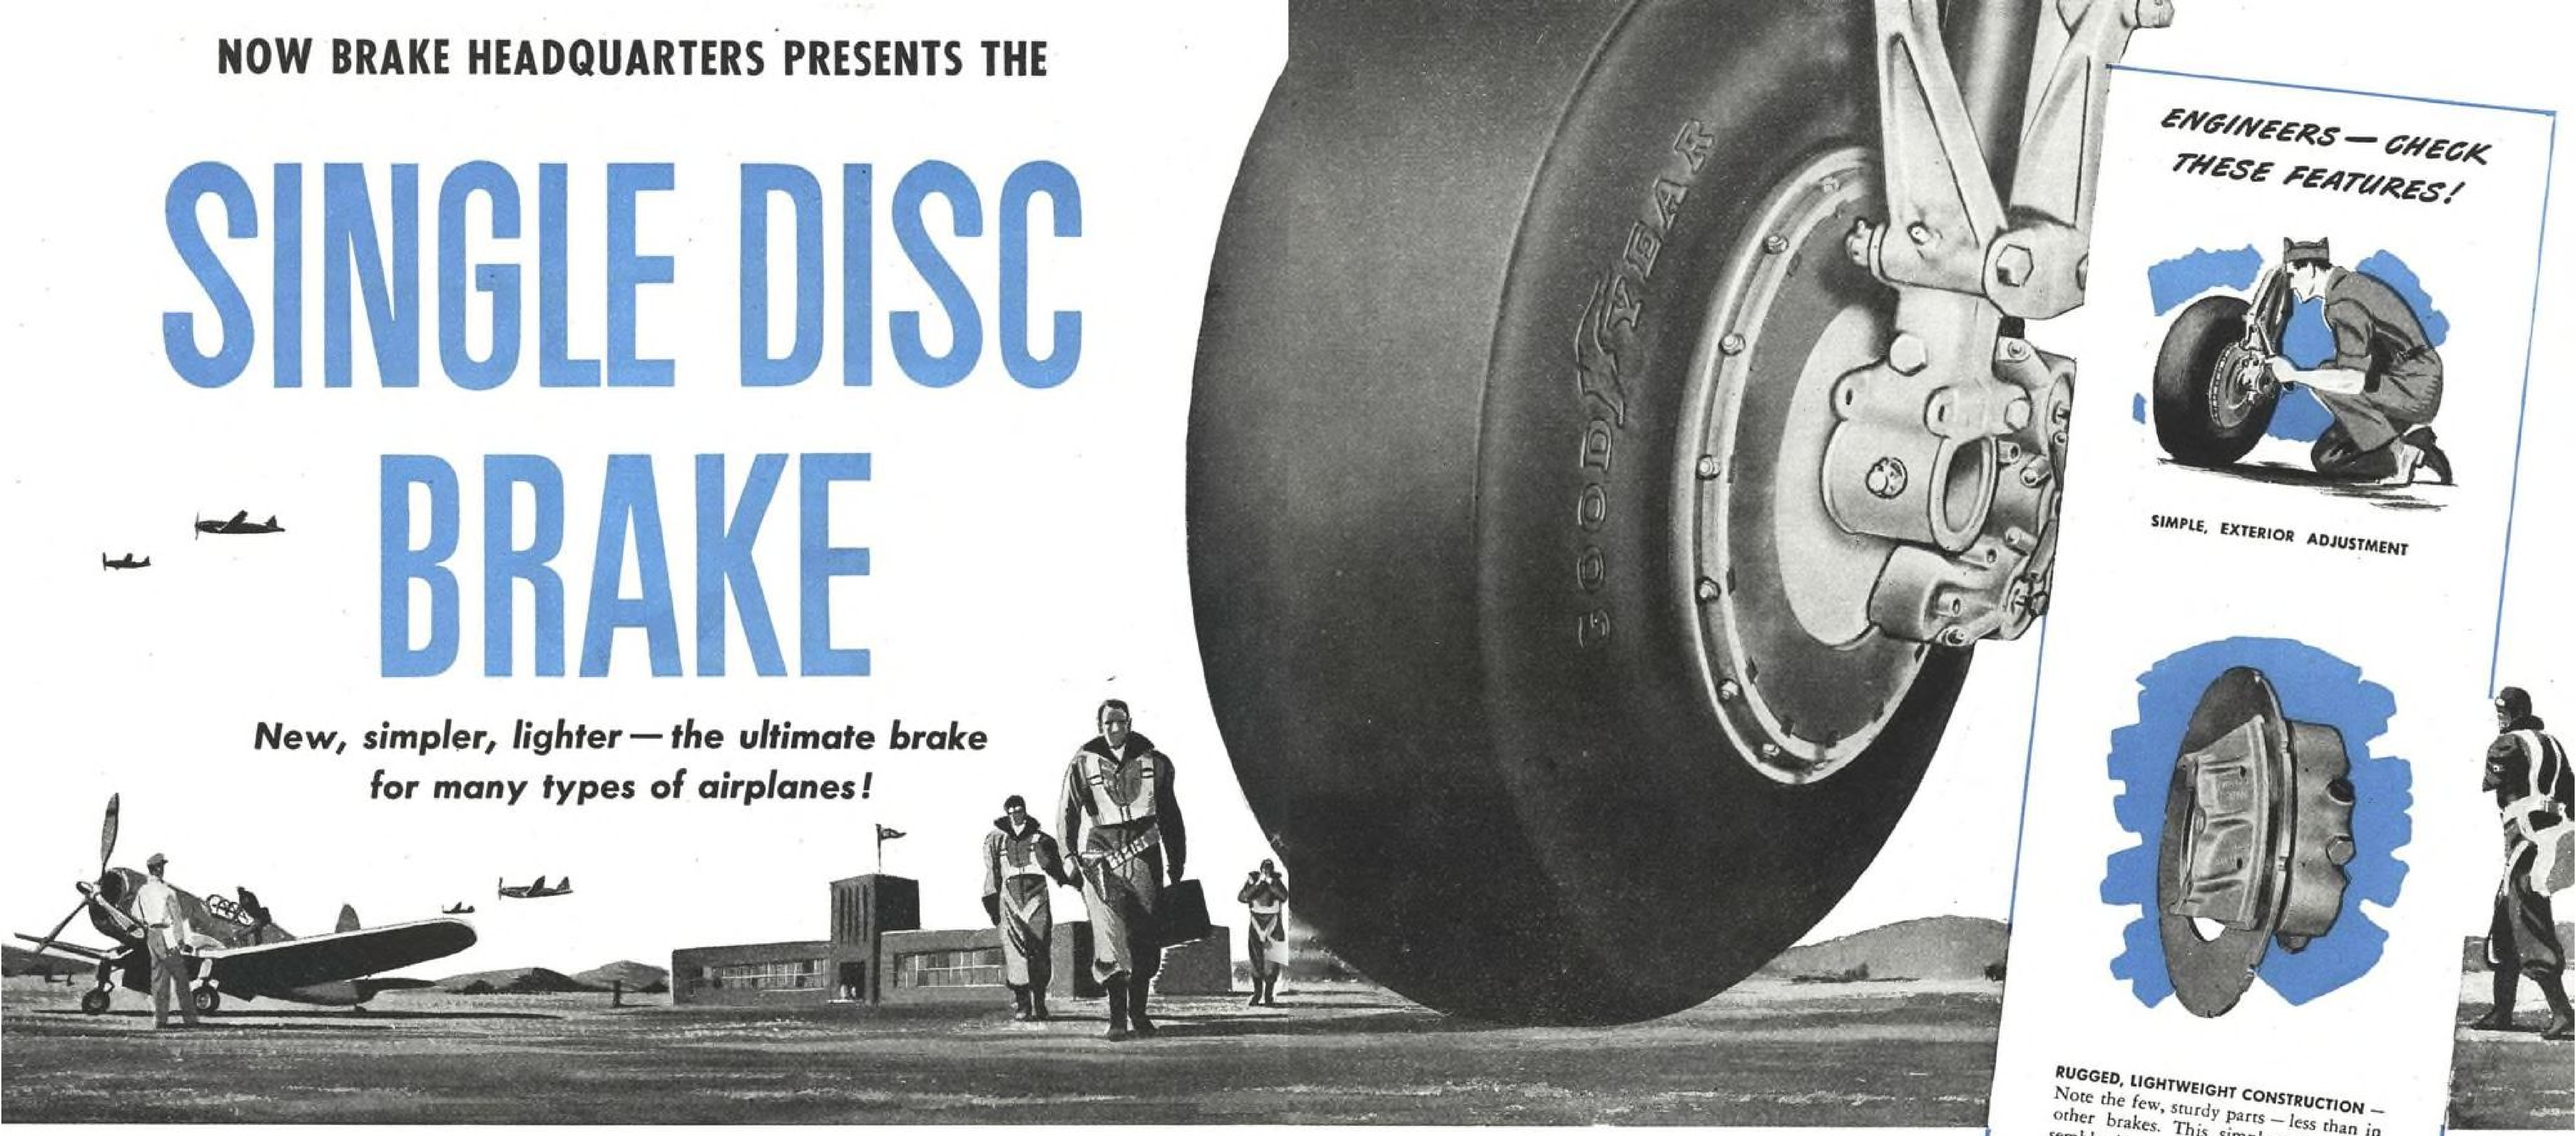

SCORE another major advance for Goodyear, world's foremost builder of airplane brakes, wheels, tires and tubes. It's the new Goodyear Single Disc Brake — a worthy flying mate of the time-proved Goodyear Multiple Disc Brake now standard on so many famous airplanes.

This new brake is already standard equipment on numerous types of aircraft — including helicopters, light planes, trainers, medium bombers and transports — on which a lightweight, compact, highly efficient, easily serviced brake is desirable. As its name implies, braking action is applied through a single steel disc, rotating between two brake shoes held in a unique clamp that exerts smooth, equalized, non-fading pressure.

SIMPLEST TO ADJUST AND SERVICE

Exterior screw adjustment is fast and simple. Brake relining takes but a few minutes and requires no special tools.

The Goodyear Single Disc Brake is made in both hydraulic and mechanical types, installed without alteration in present landing gear design or construction. It has been awarded the Approved Type Certificate, based on result of three years' development work in Goodyear Laboratories, and thousands of rigorous tests on Goodyear's own air fleet.

ENGINEERS — CHECK THESE FEATURES!

SIMPLE, EXTERIOR ADJUSTMENT

RUGGED, LIGHTWEIGHT CONSTRUCTION — Note the few, sturdy parts — less than in other brakes. This simple compact assembly is mounted on a die-cast magnesium wheel, creating a low weight unit. The braking disc is flush with the wheel rim, exposed to the full cooling effect of the slip stream. This, together with its large surface area, insures rapid heat dissipation, eliminating fading from overheating under emergency conditions, and extends life of brake lining far beyond normal.

* * *

SEND FOR FULL DATA — Whether this new Single Disc Brake or the heavier Multiple Disc type is best for your purpose depends upon the airplane and the operation involved. Goodyear engineers will be glad to work with you in making a complete analysis of your braking requirements. For complete information and specification data, write Aeronautics Dept., Goodyear, Akron 16, Ohio, or Los Angeles 54, California.

GOODYEAR
THE GREATEST NAME IN RUBBER

A PRODUCT OF GOODYEAR RESEARCH

AERONAUTICAL RUBBER GOODS · TIRES · TUBES WHEELS · BRAKES

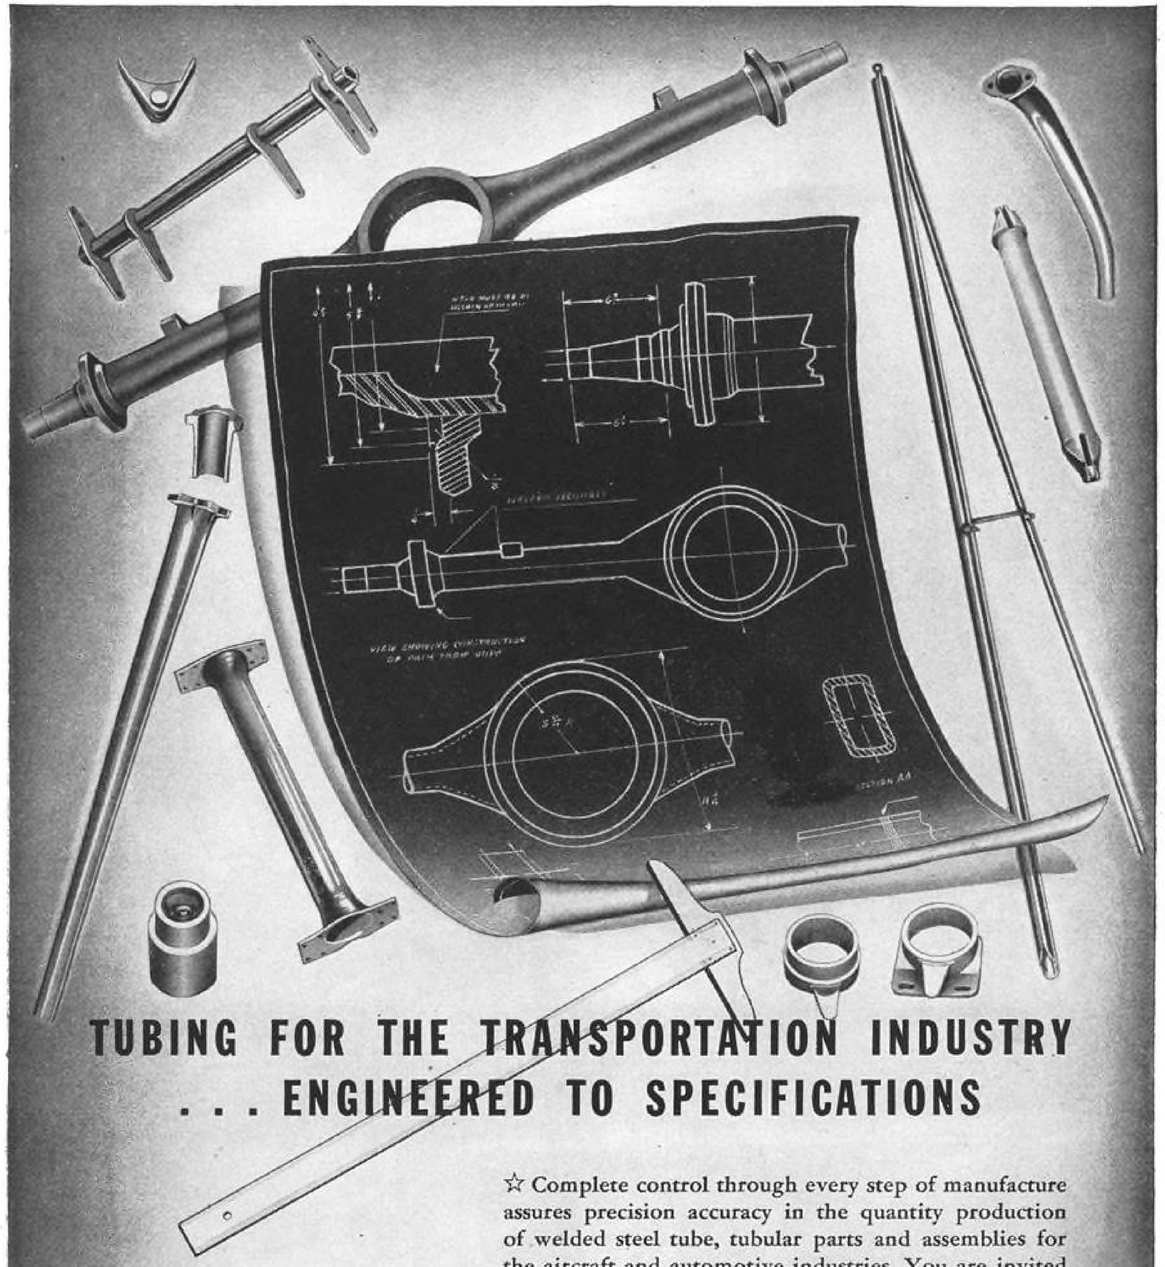

TUBING FOR THE TRANSPORTATION INDUSTRY . . . ENGINEERED TO SPECIFICATIONS

☆ Complete control through every step of manufacture assures precision accuracy in the quantity production of welded steel tube, tubular parts and assemblies for the aircraft and automotive industries. You are invited to consult with our engineers about your tubing jobs.

AMERICAN METAL PRODUCTS COMPANY

5959 LINSDALE AVENUE, DETROIT 4, MICHIGAN

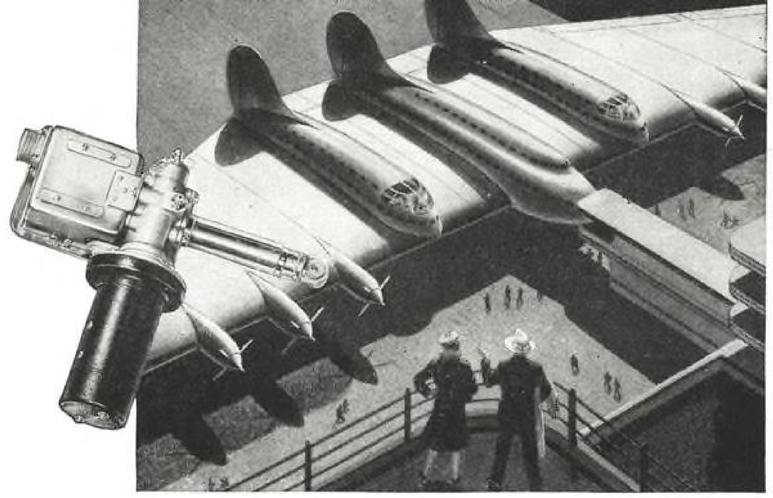

These compact, efficient packages of power will perform many of the jobs in controlling the flight of tomorrow's skyliners. Their high precision has won them a place in today's fighter planes.

PROMISE OF A BRIGHT FUTURE

in the Transmission of Power...

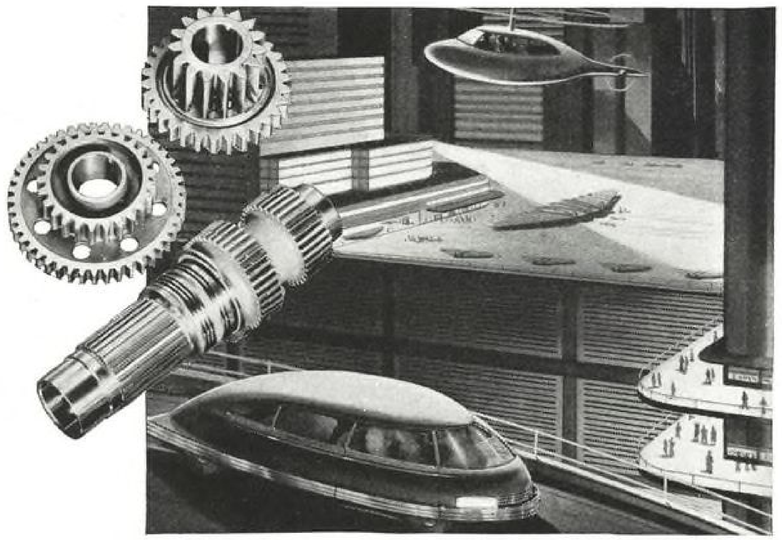

Mass production of high precision gears will assure more efficient performance — greater compactness and increased speed in tomorrow's machines.

Improved speed reducer designs assure greater compactness—smoother operation and a new efficiency to tomorrow's equipment manufacturers.

THE demands of war have brought a revolution in the economical transmission of power. Here at Foote Bros. new advances in engineering—new developments in the manufacture of extremely high precision gears, speed reducers and aircraft devices, give promise to American manufacturers of a new era of "better power transmission through better gears" when the war is won.

Tomorrow these new developments may solve problems for you in the equipment you manufacture. When that time comes, you may look to Foote Bros. for gears and speed reducers in any size—held to the tolerances you require. Foote Bros. will also be able to offer you an engineering service to assist your designers in any power transmission problem requiring the use of gears and speed reducers.

FOOTE BROS. GEAR AND MACHINE CORPORATION
5225 South Western Boulevard, Chicago 9, Ill.

FOOTE BROS.
Better Power Transmission Through Better Gears

"Each Pound Saved On a Plane Increases Earning Capacity by $100.00 a Year"

SAYS W. C. MENTZER,
Chief Engineer,
United Air Lines, Inc.

UP TO 60 LBS. PER PLANE SAVED BY BOOTS NUTS

- Far lighter, and much tougher than other nuts.
- Can be used over and over again.
- "Outlast the plane."
- Now standard fastenings on *all* types of military aircraft.
- After victory, will be standard on commercial planes.
- Approved by all government aviation agencies.

CORNER ANCHOR NUT —WING-STYLE

This is one type of the famous Boots All-Metal Self-Locking Nuts

BOOTS *SELF-LOCKING NUTS*

"They Fly With Their Boots On—Lighter"

Boots Aircraft Nut Corporation, General Offices, New Canaan, Conn., Dept. I

"THE elimination of all unnecessary weight is the ever-present concern of those who build and operate airplanes. On the military airplane, weight saved means more bombs or guns carried; on the commercial airplane, more service to the public and more dollars earned. With its Mainliners carrying record loads of essential passengers and cargo, United Air Lines estimates that each pound of unnecessary weight saved represents an increased earning capacity of $100.00 per year, plus the intangible but important value of added accommodations for vital wartime commerce."

SEND FOR FREE BOOTS WEIGHT-SAVING BOOKLET TODAY. A comprehensive review of comparative weights of various types of self-locking nuts, prepared for the convenience of aircraft designers, engineers, operating and maintenance personnel. Copy will be sent you, free, on request.

CLEARING the South Pacific atolls of Tojo's yellow hordes calls for eternal vigilance. Jap moves must be spotted fast. Where are they? How many are there? What are they up to? The only way to get the answers is from the air.

On a June day last year a flight of eleven Corsair fighters took off on patrol from their South Pacific base. The job of combing vast areas of sea and pin-point islands for signs of the wily Jap can be monotonous. But it's a job that calls for constant alertness. For anything can happen. And it usually does—when least expected.

Major Ray L. Vroone, U. S. M. C., and First Lt. W. H. Snee, U. S. M. C., were in the flight above the clouds. Suddenly the clouds break. There, 1,000 feet below are 20 to 25 Zeros, out looking for trouble. The flight pounces for the kill. The Japs, caught on the spot, duck into the safety of a cloud bank. Our fighting Marines have plenty of scores to settle with the Nip. 50 miles they press the chase. But the Zeros had scored a disappearing act.

By now, the unsettled weather that provided the Japs with cover had closed all landing fields in the home area. Vroone and Snee became separated from the other planes in the flight. Snee's gas was running perilously low. He signalled Major Vroone he was forced to make a water landing. Setting his fighter plane down in the water off a small island, Snee got clear before it sank and reached shore safely in his rubber boat.

Vroone had radioed the base of his companion's plight. Swiftly to the rescue came an Edo-equipped Navy *Kingfisher*, one of the famed "mercy ships of the air," piloted by Lt. (j. g.) W. C. Adams, U. S. N. R. Skillfully, Adams taxied his ship shoreward and, within a scant two hours after his forced landing, Lt. Snee was hitchhiking back to his base.

But a major can't fly any farther on a gallon of gas than a first lieutenant. Major Vroone, too, was forced down when his gas gave out. Lt. (j. g.) Grant Herreid, U. S. N. R., flying another *Kingfisher* was ordered out to find him. In a little more than an hour, he located the Marine Major on an island beach. By then a heavy sea was rolling. Herreid negotiated his water landing but had to avoid the pounding surf. Vroone, with no other means of reaching the rescue plane, swam through the breakers and was quickly hauled aboard. He, too, was safely back at his base before nightfall. Final report: "All present".

Rugged Edo Floats permitting Navy scouting planes to land and take off on rough ocean water have been writing chapter after chapter in the heroic story of unrelenting effort which has snatched scores of Naval Aviators from death after they had been forced down or shot down during flight operations.

EDO FLOAT GEAR

SERVES THE UNITED NATIONS

EDO AIRCRAFT CORPORATION
402 *SECOND STREET*
COLLEGE POINT, N. Y.

ARMY E NAVY

HITCHHIKER... South Pacific Style

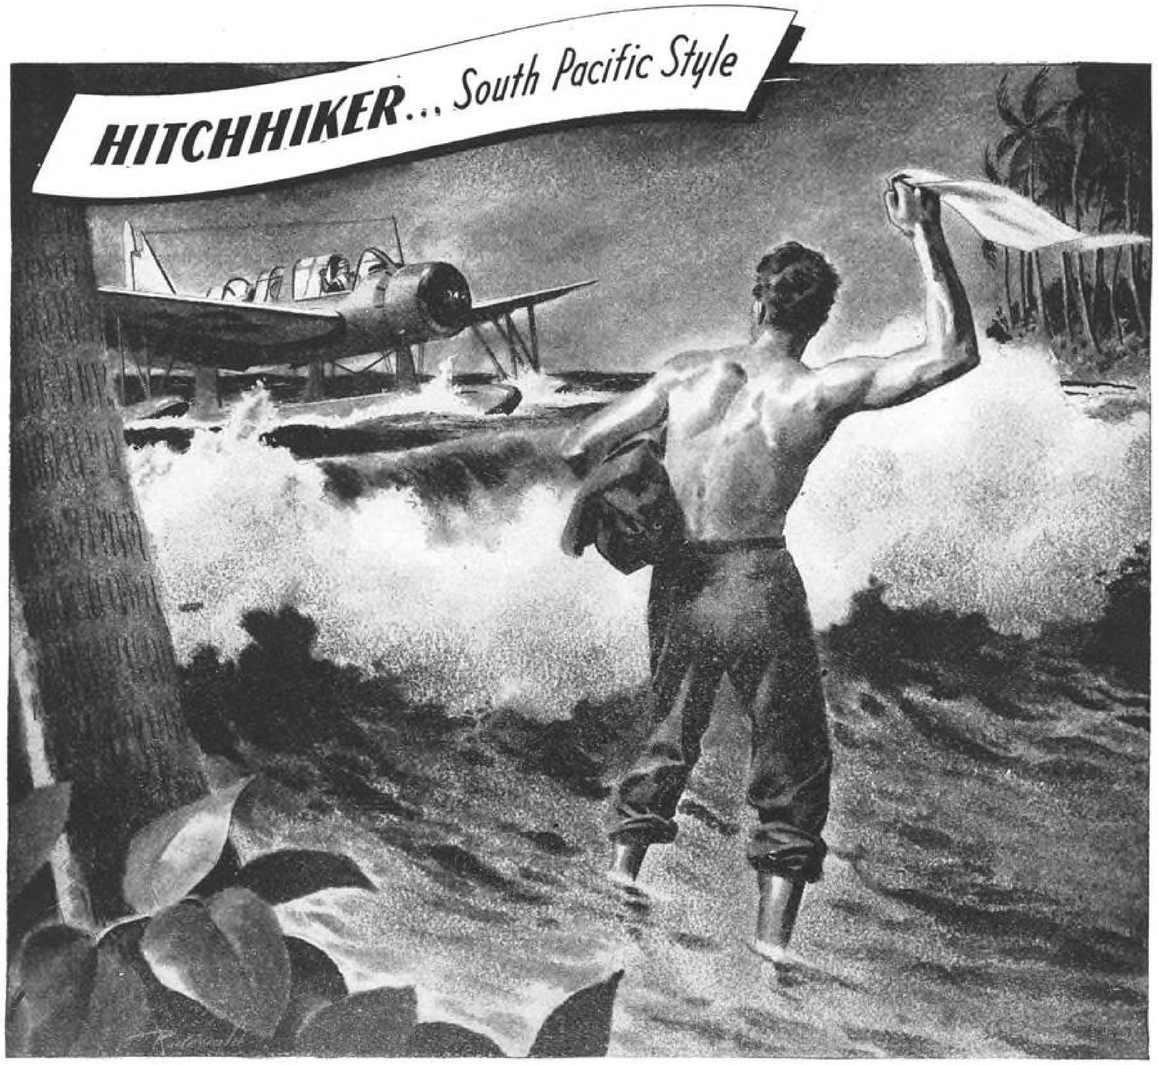

TYPES OF SUPERIOR TUBING IN MANY METALS—MAX. OD—5/8"

MECHANICAL—Analyses generally handled are SAE 1010, 1015, 1020, 1025, and 1035. They are used wherever tubes are machined, formed, bent, etc.

AIRCRAFT—Requirements of this industry cover every analysis. Major production is in SAE 4130X, SAE 1025, SAE 1010, Stainless Types 304, 321, and 347, Inconel and Aluminum. Government specifications in constant use are AN-WW-T-846, AN-WW-T-850A, AN-WW-T-855, AN-WW-T-858, AN-WW-T-861, and AN-T-43. Also certain AMS specifications, with reservations because of size range or availability of redraw stock. As substitutes become available, Superior will advise customers as far in advance as possible. Practically all of these changes will be forced by war conditions, but we are confident that the substitutes will be every bit as effective for the application as the material being supplanted.

INSTRUMENT TUBING—In this field, Superior furnishes hypodermic needle tubing, metal tubing for surgical instruments and parts, pointer tubing for electrical instruments, flattened tubing for Bourdon Springs. The hypodermic needle tubing is available in all standard sizes in the temper developed over a period of years, as most suitable for the application. The pointer tubing is generally aluminum where you get the combination of extreme lightness and maximum strength. For Bourdon Springs, Superior uses SAE 4130 X and Beryllium Copper.

CORROSION RESISTANT TUBING—In this category, Superior places the Stainless Steels, Nickel, Monel, Inconel, Copper and Aluminum. All of these are handled more or less regularly. The use of these alloys is indicated wherever you would find the problem of corrosion, whether because of acids, atmosphere, etc.

TUBING FOR ELECTRONIC APPLICATIONS—At the present time, Superior is furnishing Seamless Nickel, Monel, Inconel and Stainless. The tubes are used as anodes and cathodes in practically all types of Electronic tubes. In addition, we produce Lockseam Sleeves** made from Nickel strip and also some Lapsleeves made in somewhat the same way. Also tubing with special magnetic and glass sealing properties can be obtained. We urge you to get in touch with us when you are developing a design.

** U. S. Patented

SUPERIOR

THE BIG NAME IN SMALL TUBING

SUPERIOR TUBE COMPANY, NORRISTOWN, PENNSYLVANIA

FOR EVERY SMALL TUBING APPLICATION FROM 5/8" OD DOWN

SUPERIOR Seamless in various analyses. WELDRAWN Welded and drawn Stainless, "Monel" and "Inconel"

SEAMLESS and Patented LOCKSEAM Cathode Sleeves

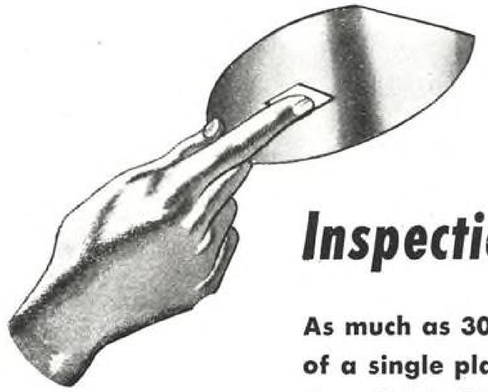

PRESS and the Inspection Door Flies Open

As much as 30 minutes is saved in the inspection of a single plane by the *new Hartwell inspection door latch*. That means planes in action faster!

APPROVED BY ARMY AIR FORCES

Patent applied for

The new Hartwell inspection door latch ends the slow, tedious removal and replacement of inspection doors. Simple and rugged in construction, it contains four parts—trigger and bolt, made of light gauge steel, aluminum bracket, and twin springs (two are used for safety). It is light—weighs less than ⅛ oz.; rivets to the inspection door, and it *fits flush!*

Press the trigger of the Hartwell latch and the inspection door pops open! Press the bolt and it is locked shut! Two or more latches may be used on a single door, if desired. This inspection time-saver can be installed in a standard Army Air Forces cutout, shown on print 43G2853.

New flush hinge. Available with the new Hartwell inspection door latch is the new flush hinge. It is light and durable. Holds the inspection door to 30 degrees of full opening when it is released by latch. *For complete engineering details about latch and hinge write or wire our Los Angeles office.*

Single source for 779 different aircraft production parts and tools

HARTWELL
AVIATION SUPPLY COMPANY

3417 CRENSHAW BLVD., LOS ANGELES 16, CALIF.
DALLAS, TEX. · DETROIT, MICH. · KANSAS CITY, KAN.

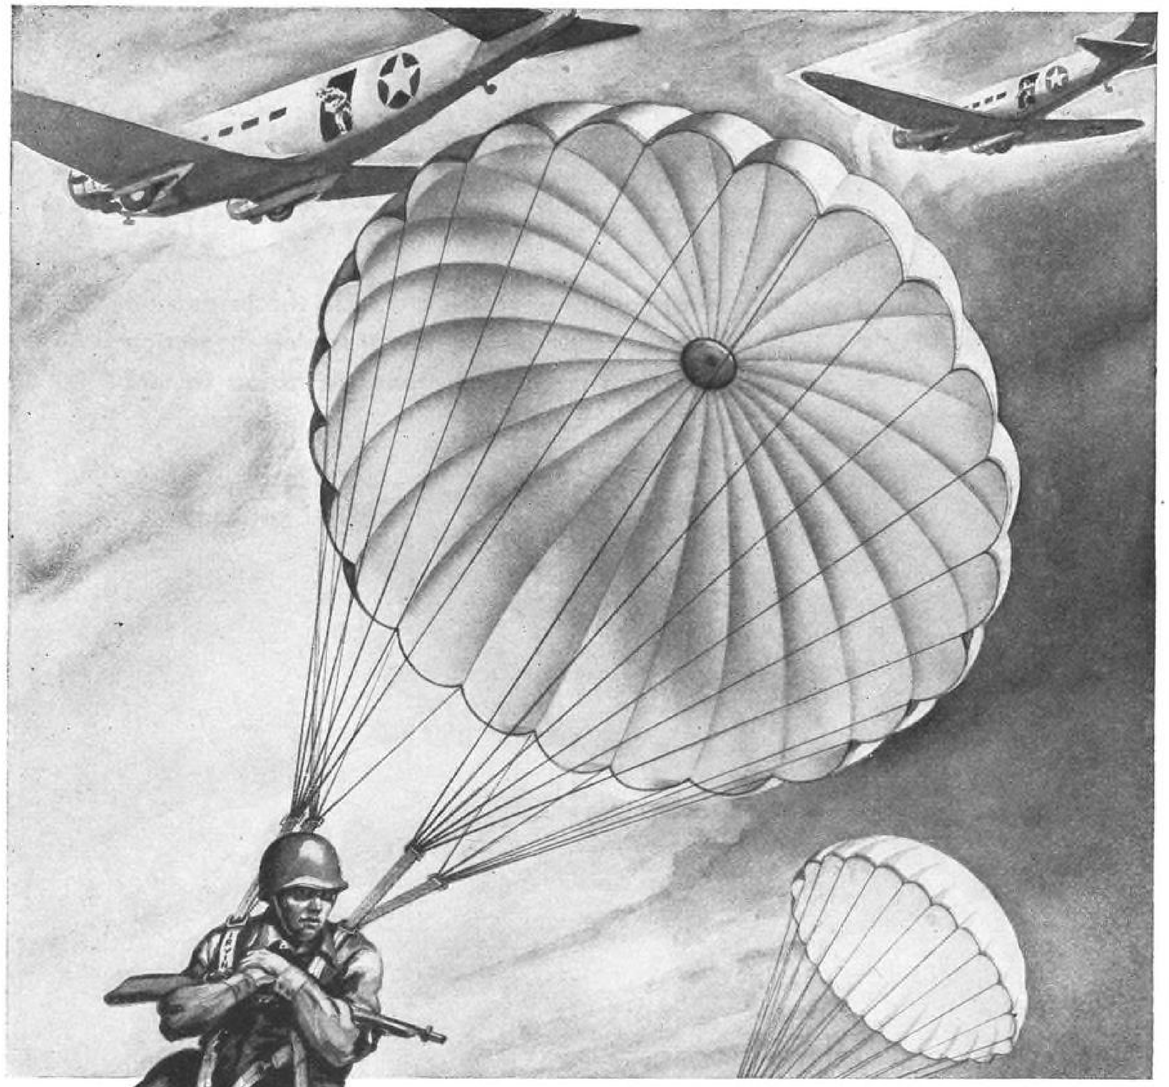

On to *His* job for Victory—Are you doing *all* you can to back *Him* up?

The name "IRVIN" on the harness means the chute is produced in an Irvin Factory with over 23 years' experience and skill in chute-making. Literature can be had by school or training executives for the asking. Address Main Office, Buffalo, N. Y.

THE CATERPILLAR CLUB: Founded in 1920. There is only one qualification for a life membership—in an emergency men and women who have saved their lives with parachutes. The word CATERPILLAR and representation of a caterpillar are registered trade-mark features of Irving Air Chute Co., Inc. We are anxious that the Club Register be kept complete and members upon enrollment will receive a gold caterpillar pin with the name inscribed thereon. Communicate with Main Office.

IRVING AIR CHUTE CO., Inc.

1670 Jefferson Ave., BUFFALO 8, N. Y.

Factories at other points in United States, Canada and England ... All Serving the United Nation's Air Forces

check this new development for '44 . . . form

INTRICATE SHAPES FROM FLAT SHEETS WITH MICARTA "444"

Micarta "444"—a new development in manufacture—now offers a new, practical and economical means for forming structural shapes from completely cured flat sheets . . . with low-cost equipment, and dies of non-critical materials. Shapes like those shown can be produced easily and quickly—in most cases with inexpensive wood molds and by use of a simple arbor press. Deep draws, sharp bends and intricate shapes may be obtained. Parts produced are strong, stable and permanent.

Originally developed for aircraft needs, Micarta "444" is being used for trim tab fairing, fuselage tail-wheel housings, ammunition feed chutes, and for many other practical applications. It provides characteristic Micarta properties of strength with lightness, and resistance to heat, cold, humidity and chemicals. Investigate the full story—write for the new Micarta Data Book B-3184-A. Westinghouse Electric & Mfg. Co., East Pittsburgh, Pa. J-06349

JUST HEAT . . . Premolded and cured flat sheets are heated uniformly on both sides by infrared lamps, ovens or parallel hot plates to just under the blistering point.

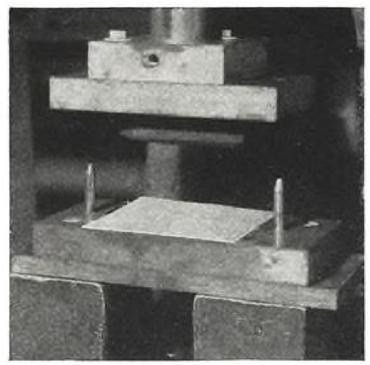

INSERT . . . Heated sheet is then placed in inexpensive wood mold in arbor press or where pressure can be applied to molds.

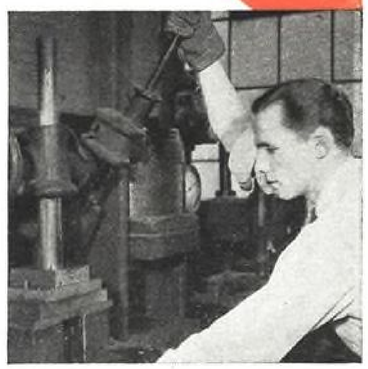

AND FORM . . . Pressure at approximately 100 pounds per square inch is applied, and shape left to cool briefly in mold. Resulting shape is permanent.

The Whirling Flame

UNIQUE WHIRLING FLAME INSURES UNIFORM HIGH AND LOW ALTITUDE OPERATION OF JANITROL AIRCRAFT HEATER

THE Janitrol Aircraft Heater, developed by Surface Combustion, is now used in thousands of planes in practically all theaters of war.

It is a heater specifically designed for aircraft heating to operate under all flight conditions. It is not a ground-level heater, adapted to aircraft.

The whirling flame, which is the heart of the Janitrol high altitude aircraft heater, takes the form of a tight spiral of flame. The flame is stable at any altitude and sustains combustion under the most adverse conditions because it is whirled around itself many times. Thus ignition is continuous and the combustion process is "self-piloting". The whirling is produced by introducing air into the cylindrical combustion tube tangentially to its inner surface. The liquid fuel enters the combustion tube through a vaporizer or spray nozzle ahead of the combustion air inlet.

Heaters operate with complete satisfaction at 37,500 feet, and in pressure chambers simulating, over 50,000 feet.

The Janitrol heater burns any aviation fuel as well as other liquid fuels. It minimizes the weight of fuel tubing and heating ducts. Heaters may be spotted in various parts of the ship where heat is required. They are compact and operate in any position, irrespective of any attitude the ship may take. They require no attention during operation and need no adjustment for climbing, diving or taking off.

Heaters range in weight from approximately six pounds for the 15,000 B.t.u. unit to 20 to 30 pounds for the 125,000 B.t.u. unit, including controls.

While normally operated with ram-air the heaters can be equipped with auxiliary blower for ground heating operations such as engine warming, preheating of cockpits, cabins, etc.

For further information write The Aircraft Heater Division, Surface Combustion, Toledo 1, Ohio.

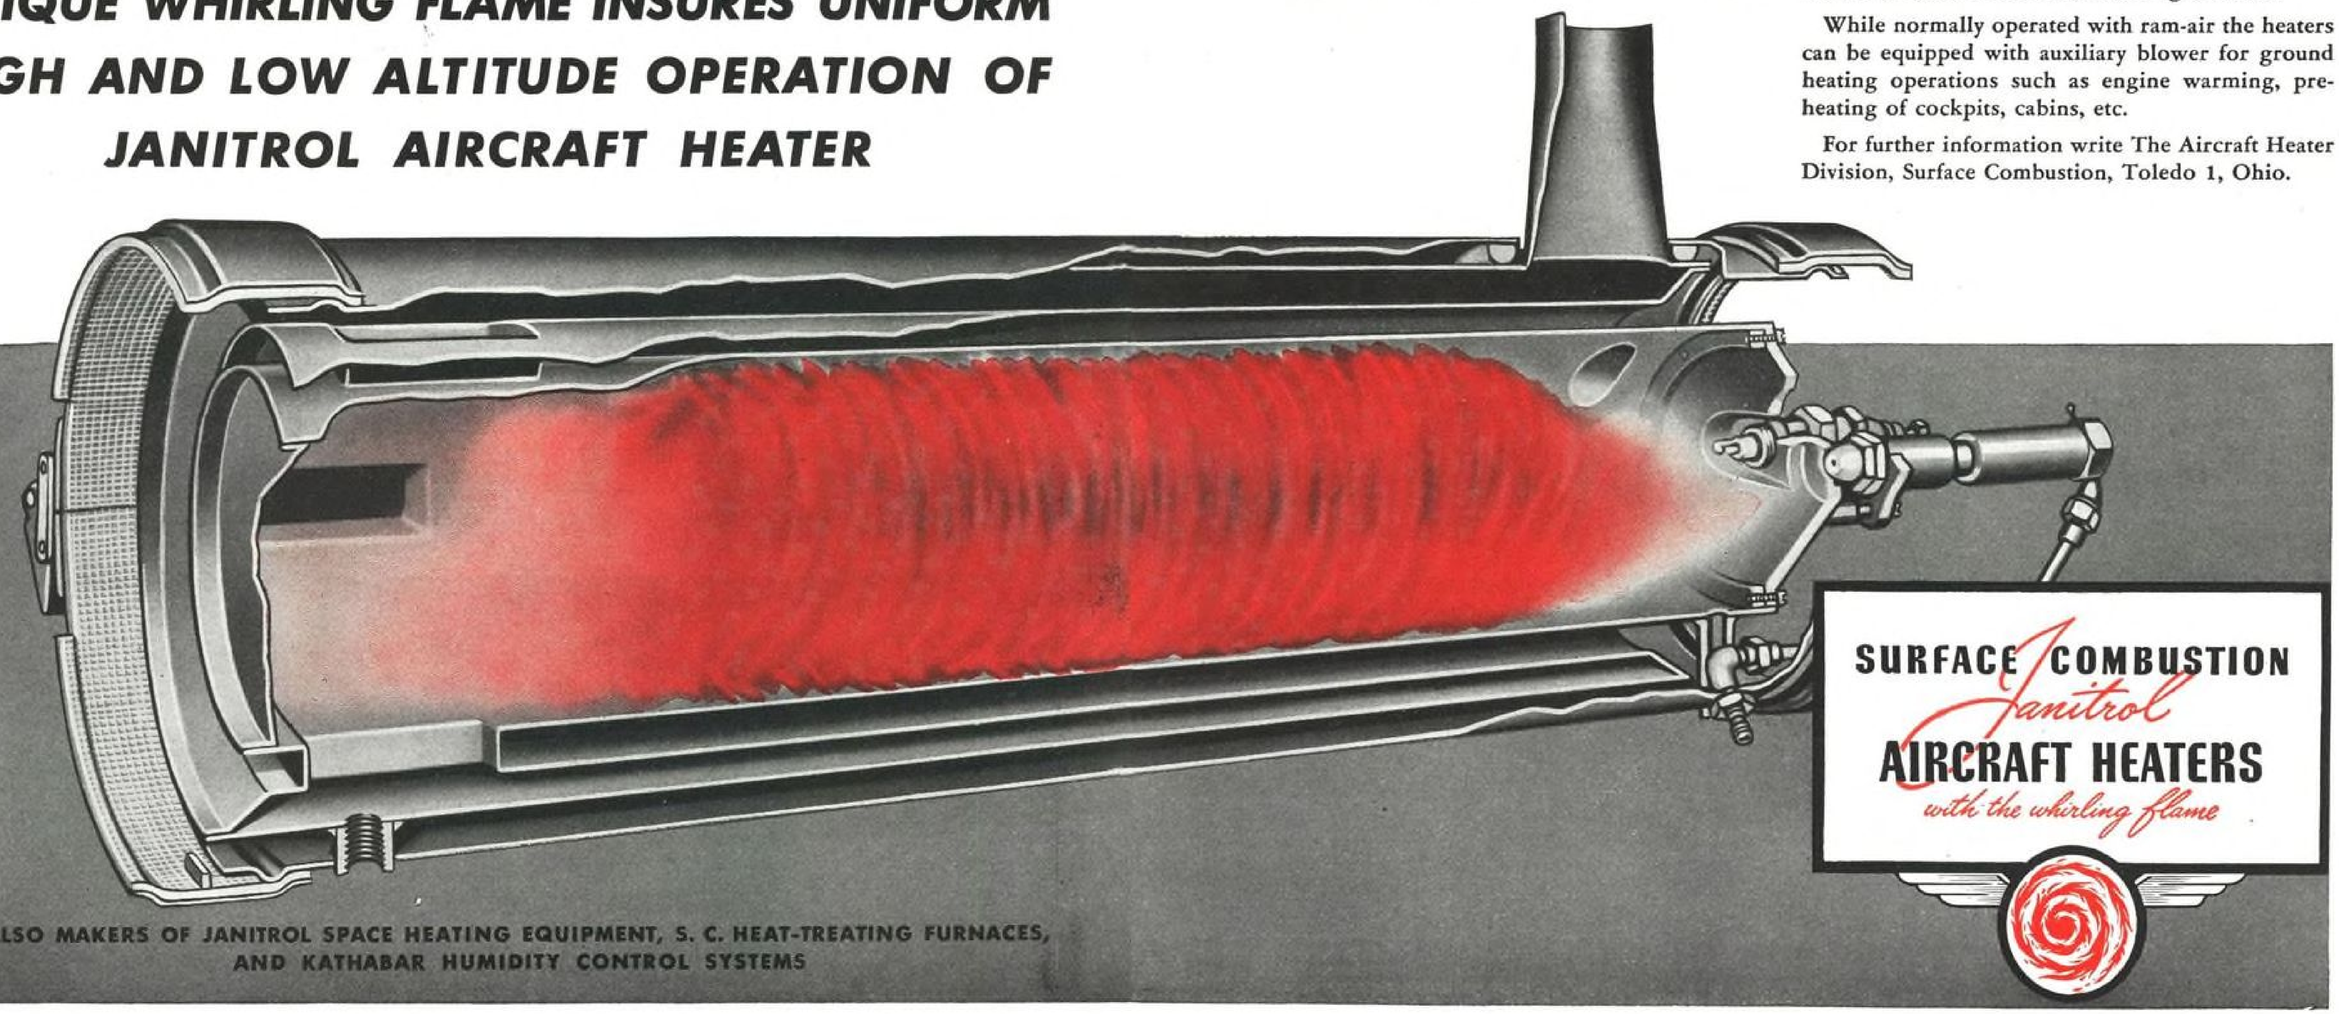

ALSO MAKERS OF JANITROL SPACE HEATING EQUIPMENT, S. C. HEAT-TREATING FURNACES, AND KATHABAR HUMIDITY CONTROL SYSTEMS

How to save *operations* in assembly...

1

Simply peeling *precision laminations from a Laminum shim leaves a solidly bonded unit... of known gauge... provides exacting accuracy of adjustment.*

2



Position shim and tighten the bearing. It is as simple as that.

it's **LAMINUM** TRADE MARK

THE SOLID SHIM THAT *peels* FOR ADJUSTMENT

Is YOUR ASSEMBLY department still using loose-leaf shims?...counting...stacking...miking...and spending time fussing to keep loose paper-thin shims aligned while bearings are fitted? *If so, there are assembly-cost savings ahead for you.*

New users of Laminum are being added continuously...and equipment makers who have installed these shims for 25 years and more continue to *use Laminum as new models are brought out.*

One aircraft engine builder, using Laminum to secure proper back-lash of gears, adjustment of anti-friction bearings and in many other applications, has used these shims ever since their first engine was built 15 years ago.

Try Laminum shims. Resulting assembly savings may be of even greater value to you in post war production. (If you want an idea of the hundreds of present applications of Laminum, write for our photo file-chart.)

Shims cut to your specifications. Stock shim materials for maintenance are carried by industrial distributors.

LAMINATED SHIM COMPANY, INCORPORATED
63 Union Street • Glenbrook, Conn.

2162

Phillips - - - Salutes

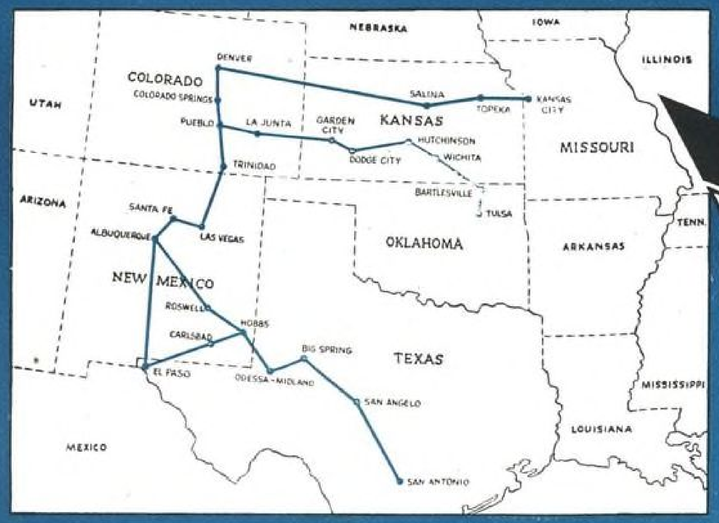

SERVING THE WEST
CONTINENTAL AIR LINES

a great airline with a great record. Fueled with:

Phillips
AVIATION GASOLINE

PHILLIPS PETROLEUM COMPANY, BARTLESVILLE, OKLAHOMA

A major supplier of 100 octane gasoline to the Army, Navy, and United Nations air forces

2000°
1800°
1600°
1400°
1200°

HIGH TEMPERATURES

...as they affect the properties and usefulness of metals

A metal's fitness for high temperature use is usually measured by two yardsticks:

1. *Its resistance to oxidation*
2. *Its strength and hardness*

at the temperatures it must undergo.

Getting a good rating on one of the two counts isn't enough. A thoroughly satisfactory metal for most heat-resisting use must get a high mark on both.

Resistance to oxidation is measured in terms of freedom from scaling and intercrystalline attack. High strength won't matter for long if a metal oxidizes and scales, thus reducing in cross-section, or if intercrystalline change saps its vitality. Also, in many applications, the scale that flakes off is one more complicating factor.

On the other hand, an oxidation-resistant metal that is too soft or weak to support its required load in the high temperature range is out from the start.

Strength for heat-resisting service is measured by a series of tests, the most important of which is the creep strength of the material.

In this test, the metal is subjected to known stress under controlled temperature and atmosphere conditions. The results are reported as pounds of stress necessary to produce an elongation over a prolonged period of time.

Along with this basic test for high temperature usefulness are others which determine the endurance limit, impact strength, short-time tensile strength, and hot hardness . . . all of which help give a "yes" or "no" to the metal's selection for high temperature use.

The results of these tests in the chart below show the reasons for the remarkable high-temperature service life of the nickel-chromium alloy Inconel.

For most purposes . . . and especially for applications where mechanical stress is involved...Inconel is outstanding even among the heat-resisting INCO Nickel Alloys for service at the highest temperatures. Inconel fights off progressive oxidation. It is little affected by thermal shock, or sudden, wide swings in temperature. It holds up well under both suddenly applied and constant load and it is a workable material which can be formed into complicated shapes and welded to produce ductile joints that endure constant vibration without cracking.

An aeronautical use that points up some of the properties of Inconel is the collector tube on the fuel-air mixture indicator for bombers and fighters. Continuously exposed as it is to the direct blast of corrosive exhaust gases at 1400° F., the tube must combine freedom from oxidation with strength at high temperatures. No other material has been found which does this particular job as well as Inconel.

The many heat-resisting properties of Inconel are demonstrated, perhaps even more graphically, by the exhaust manifolds used on Pan American Clippers.

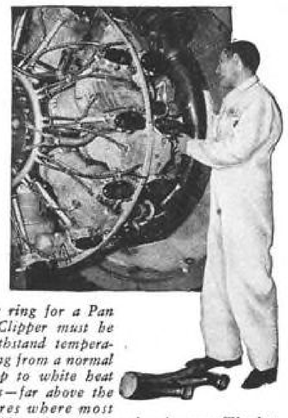

A collector ring for a Pan American Clipper must be able to withstand temperatures ranging from a normal 1500° F. up to white heat on take-offs—far above the temperatures where most metals would weaken, warp and scale away. The hot strength of Inconel is its chief value as a material for exhaust manifolds.

Here, the same red-hot blast of exhaust gas is encountered as in the collector tube. Intense vibration and exceedingly quick temperature changes are piled on top of the corrosive and strength-sapping attack of the hot gas. Despite these destructive factors . . . and the very light gauge of the sheet used . . . many of the Inconel manifolds have seen more than 5000 hours of flying service *without repair.*

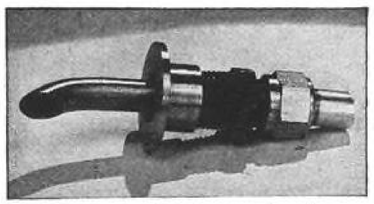

Continuously exposed to aircraft exhaust fumes at around 1400° F., this collector tube for a fuel mixture indicator is made of strong, heat-resistant Inconel. Tube is product of Cambridge Instrument Co., New York, N. Y.

For further information regarding the properties and working of INCO Nickel Alloys, write for a copy of the new booklet "INCO Nickel Alloys for the Aircraft Industry." A copy is yours for the asking.

THE INTERNATIONAL NICKEL COMPANY, INC.
67 WALL STREET NEW YORK 5, N. Y.

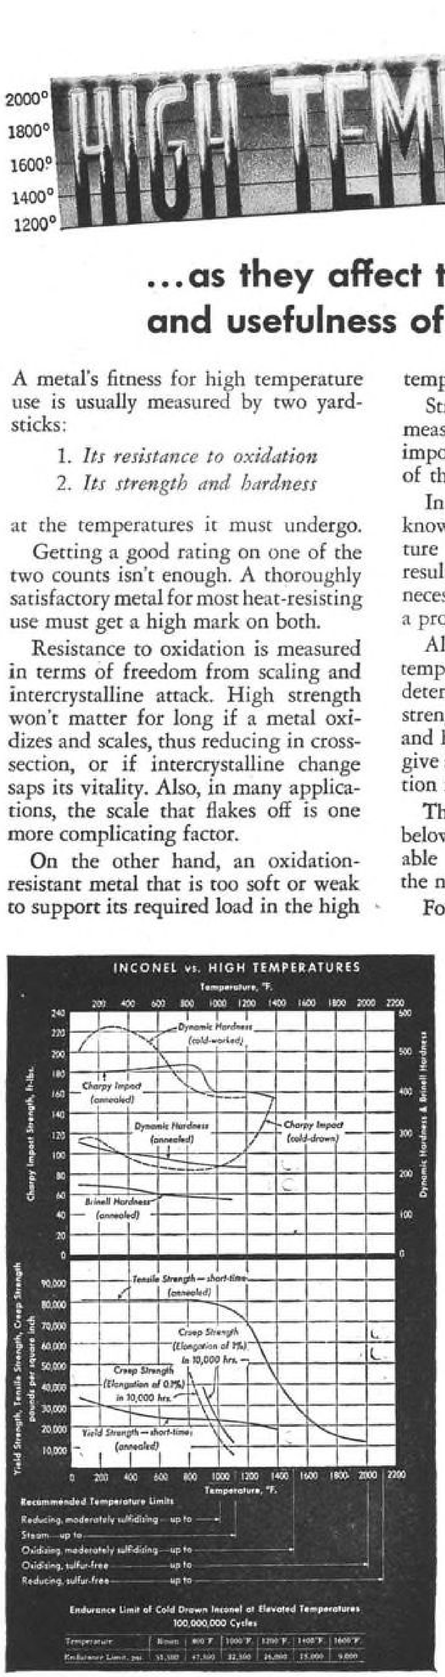

Friend or Foe?

Over Africa recently a flight of American bombers on their way to a target received radio instructions to change course and attack a different objective. Because of the clarity of reception, an alert operator was able to take a bearing on the signal—only to find that it was coming from the enemy. A call back to base brought out our fighters, who proceeded to the false target and destroyed thirty out of forty-five Messerschmitts which were lying in ambush for the flight of American bombers.

Breeze Radio Ignition Shielding is engineered to designers' special requirements. Look to Breeze for the solution to your shielding problems.

Perfect and undistorted reception and transmission of signals made possible the victory related above. Breeze Radio Ignition Shielding, which effectively guards against the radiation or absorption of radio-frequency interference, maintains a dependable "quiet zone" for static-free communication.

Pioneers in developing Radio Ignition Shielding, Breeze has designed and produced shielding harnesses for hundreds of types of aircraft, marine, and automotive engines. This equipment, now being produced in ever-increasing quantities, supplements the many other items of the well-known Breeze line of accessories for America's fighting units of land, sea, and air.

Breeze BREEZE MARK

CORPORATIONS, INC. NEWARK, N. J.

PRODUCTION FOR VICTORY • PRODUCTS FOR PEACE

EXTRA HELP for Design Change Problems...

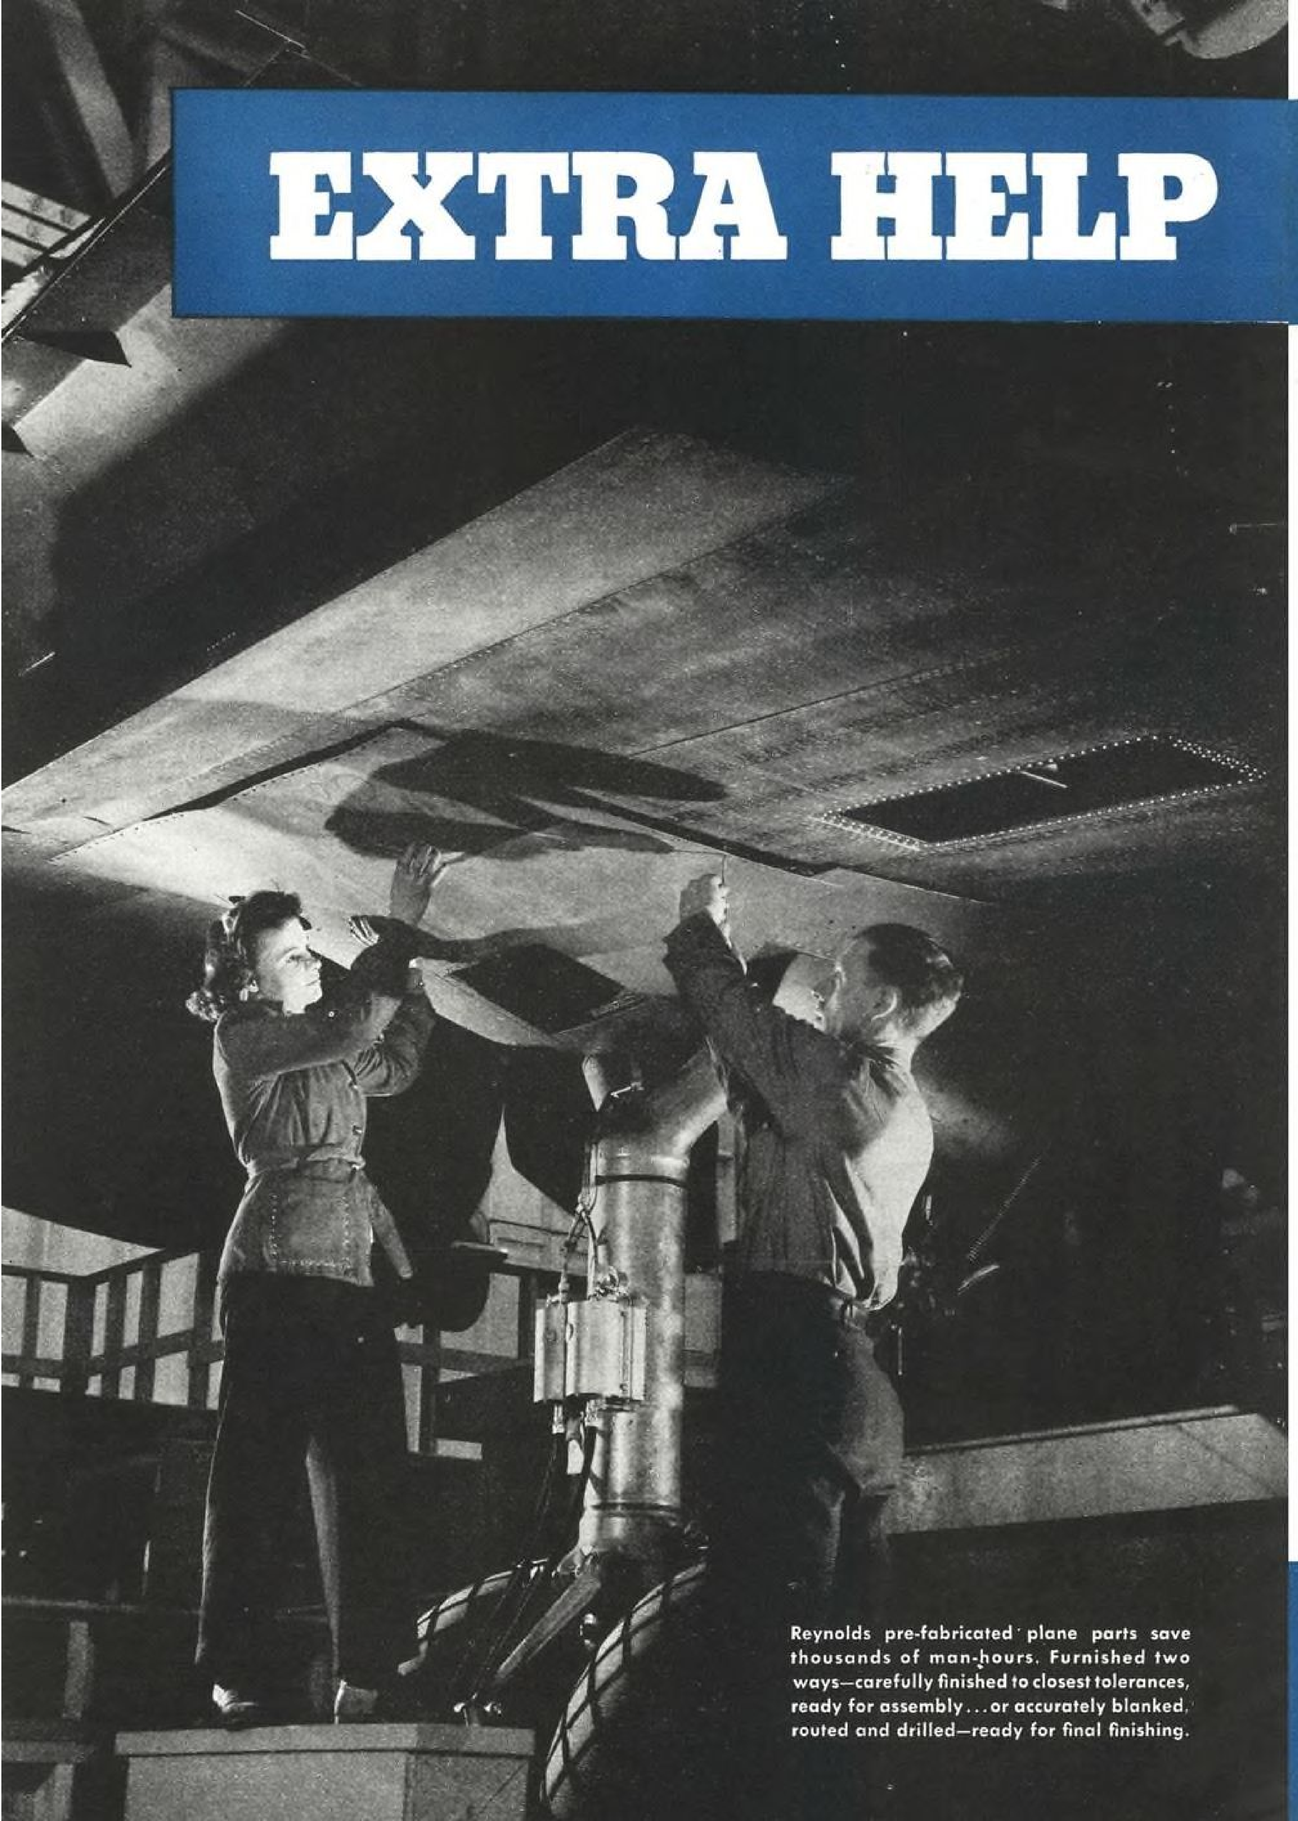

Reynolds pre-fabricated plane parts save thousands of man-hours. Furnished two ways—carefully finished to closest tolerances, ready for assembly... or accurately blanked, routed and drilled—ready for final finishing.

REYNOLDS is far more than a great *new* source of aluminum . . . it is a *complete* aluminum service. From the mines to the finished part, Reynolds' facilities speed production and lower costs.

When design changes threaten to play havoc with your plane production curve, Reynolds can help you by putting additional resources, manpower and engineering skill at your disposal. When you are trying to assemble previous designs and get new models into production simultaneously, Reynolds pre-fabricated plane parts will smooth your operations and enable you to switch to improved models without lost time.

Reynolds offers two types of plane parts service—completely pre-fabricated and semi-finished. Pre-fabricated parts are ready for the assembly line when received by the plane builder . . . carefully cut and formed to the closest tolerances. Semi-finished parts are routed to the required contour in the Reynolds plants . . . ready for further forming or other finishing operations.

Accurately controlled speed is the order of the day . . . and pre-fabricated plane parts are helping speed plane production by eliminating thousands of otherwise wasted man-hours. When pre-fabricated parts are used, only the aluminum actually built into the plane is shipped . . . the 30% scrap loss is held at the Reynolds plant, to be converted back into new metal in a matter of days instead of months.

Your inquiries on any phase of this *complete* Reynolds service are invited. Reynolds Metals Company, Aluminum and Parts Div., Louisville, Ky.

Finishing plane parts at the Reynolds plant. All parts are worked to required tolerances and Army-Navy inspected prior to shipment.

One of the many powerful hydraulic presses at the Reynolds parts plants. Equipment is available to preform practically any type or size of aluminum part.

REYNOLDS METAL

REYNOLDS ALUMINUM

The Great New Source of

INGOT · SHEET · EXTRUSIONS · WIRE · ROD · FORGINGS · TUBING · FOIL · POWDER

There are other kinds of dunking, too

FOR instance, resilient materials used in a plane may be continuously dunked in oil or gasoline. And these materials may absorb petroleum products just as readily as a doughnut absorbs coffee.

The next time you dunk a doughnut let it remind you that oil seals, hose, packing, gaskets, grommets, diaphragms, and all resilient parts used in the presence of oil and gasoline may absorb considerable weight not included in original design calculations. And this dead weight added to thousands of resilient parts in a single plane may seriously handicap its performance.

However, Hycar synthetic rubber with its light weight and its superb resistance to oil to keep it light, gives protection against excessive dead weight not offered by any other comparable material. Hycar is 15% to 25% lighter than many other synthetic rubbers, and retains this important quality throughout its long life. Further, oil-swell can be closely controlled to insure dimensional stability of parts.

Hycar has an operating range of —65° to +250° F. and abrasion resistance 50% better than natural rubber. Unlike many other oil-resistant synthetic rubbers, Hycar has a minimum tendency to cold flow after taking the initial deformation, even at elevated temperatures.

These are qualities you need in resilient materials used in the presence of oil and gasoline. Let our technical service staff help solve your individual problems. *Hycar Chemical Company, Akron 8, Ohio.*

Hycar

Reg. U. S. Pat. Off.

LARGEST PRIVATE PRODUCER OF BUTADIENE TYPE

Synthetic Rubber

GUARD *Present* Equipment with *New* Circuit Protection

Littelfuse

"QUICKER THAN A SHORT CIRCUIT"

PROTECTION FOR TODAY—AND TOMORROW

Littelfuse units for most efficient safeguarding of circuits, machines, and instruments have been improved and multiplied. Never before was electrical protection so dependable, or of so wide a range.

NEW FUSING THROUGHOUT IS ONE ANSWER

New fusing of all electrical equipment is one of the best supports of *present* service that must be prolonged. New Littelfuses mean prevention of short circuits, costly burnouts, and damage by inexperienced operators.

Whatever your problem in circuit protection, Littelfuse will be glad to counsel with you.

LITTELFUSE INCORPORATED

4757 RAVENSWOOD AVE., CHICAGO 40, ILLINOIS
260 ONG ST., EL MONTE, CALIFORNIA

There are many GOOD THINGS AHEAD . . .

The world's largest magnesium sheet and strip mill has recently gone into production.

Synthetic sapphires and rubies for the jeweled bearings of instruments and for spray nozzles, gages and spinnerets cost from three to six cents per carat while diamonds for this purpose cost about three dollars per carat. The making of these is an American war baby with a future.

NE alloys now make up as much as 20% of the tonnage of steel for aircraft.

A way has been found to put the "flags" (characteristic of natural bristles) on the ends of synthetic bristles for use in paint brushes.

The American chemical industry promises that it will employ more workers after the war than it did before.

Bituminous Coal Research, Inc., supported by the industry, has announced a $2,500,000 program, covering five years, with improvement in the use of soft coal as its object.

Dip-painted parts are being passed through an electrical field which removes the "tear-drop" in which the excess paint collects.

Electronic traffic control may replace the familiar signs and lights by signalling the driver through his dash radio.

The strongest natural fiber is Ramie, cultivated in Egypt 4,000 years ago. It is now being grown in this country and, if practical processing methods can be devised, it is expected to appear among our new textiles.

The new Orthicon camera has an "eye" composed of 400,000 pieces of light-sensitive silver which store voltage proportional to the light cast on them. It will be used in television and is said to be ten times as efficient as the iconoscope previously used.

Photo-electric cells check hand grenades at the rate of 4,000 per hour. When a defective unit appears on the conveyor, the mechanism rings a bell, lights a lamp, puts a dab of paint on the grenade, and makes a mark on a chart.

A new process for drying the paint on army tanks does the work in four minutes while the operator drives the tank through the "oven."

The use of the thyratron tube as a rectifier makes possible the use of an A. C. current supply to drive D. C. motors, the advantage being in very exact control of speed.

Extremes of temperatures encountered in flying have made necessary the development of new and better cements to replace the Canada balsam formerly used in the making of lenses.

The cost of Diesel-produced electric power is expected to be cut in half as the result of war-time developments.

Street cars designed for post-war production will be lighter, quieter, better looking, and more economical in operation. They will have more comfortable seats and the windows will be higher to give strap hangers a better view.

A new fluorescent lamp, about the size of a marble, uses only two cents worth of current a year.

A new electronic method of sorting metals detects differences in material, alloys, heat treatment and thickness.

Success of the "bazooka" against enemy tanks has called public attention again to the rocket or reaction engine as a source of power. Such a motor has been constructed, for experimental use, that develops 260 horsepower for each pound of its weight. One horsepower per pound is the approximate output of the lightest internal combustion engines.

It will pay you to keep AHEAD with us.

This unique job is produced on a 2¼", 8 spindle Conomatic equipped with a Cone Groove-Roll Attachment. The transmission shaft is 9⅞" long and 1 23/32" in diameter and the material is SAE 4140 barstock.

The rolling of the oil groove in this shaft is one of 17 machining operations all completed in a 44 second cycle and illustrates the tooling facility offered by the Conomatic. A device or attachment that increases facility without interfering with a machine's trunk-line efficiency is a device of merit.



CONE

AUTOMATIC MACHINE CO., INC. ★ WINDSOR, VERMONT, U. S. A.

5

"I'd have bought a Bonney Kit for the Sockets alone!"

"I sure like the way Bonney makes sockets. They're just the ticket for these airplane jobs . . . Light and strong and built with thinner walls. Not only that, Bonney sockets are easy to snap on and off the handles, and the openings fit snugly around the bolts and nuts, for quick, sure action . . . As a matter of fact, all Bonney tools are tops in my work."

"And, Boy, are they doing a job out here!"

"My business? Servicing Uncle Sam's planes—and what a lift I'm getting from Bonney tools. They're rugged, light-weight, easy-to-handle. I don't have to tell you what tools will be in my kit when I get back to that job in the States."

BONNEY FORGE & TOOL WORKS • 711 N. MEADOW ST. • ALLENTOWN, PA.

BONNEY TOOLS

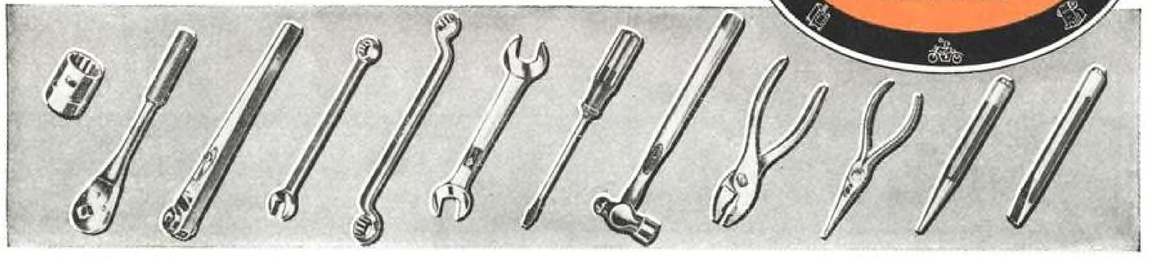

From the flaming jaws of the hardening furnaces to the molten rock of the salt baths every operation in the Guiberson heat-treating plant is under full automatic control. Designed and built to fulfill the precision needs of oil tool, aircraft part and engine production, the heat-treating division of the Guiberson plant is manned by highly trained and skilled mechanics utilizing automatically controlled furnaces and equipment. Guiberson engineers are ready to help you solve your hardening and tempering problems . . . the Guiberson plant is ready to perform your precision hardening and testing operations in the Southwest's finest heat-treating plant.

GUIBERSON *Heat-Treating*
covers the field of
ALL STEELS
and
ALUMINUM
in all shapes, sizes
and weights

25 YEARS OF SERVICE

guiberson ★ USA

THE GUIBERSON CORPORATION — *Dallas, Texas* — GUIBERSON DIESEL ENGINE COMPANY

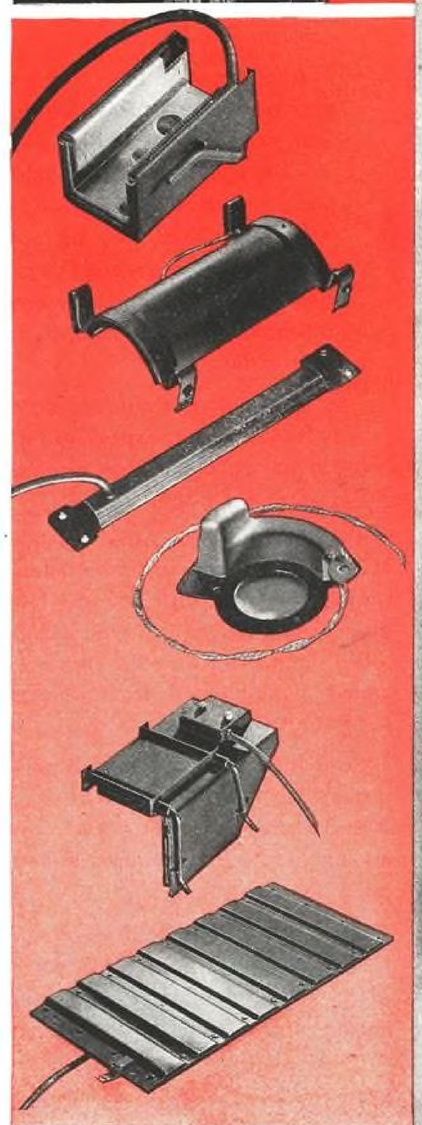

Controlled Electric Contact HEAT

. . . in units designed to fit YOUR special problem

. . . an outstanding wartime development

IN sub-zero temperatures ranging as low as 65° F below, hundreds of thousands of H. & A. Contact Heat Units are keeping machine guns firing, hydraulic actuating cylinders functioning and storage batteries operating.

Learn more about this remarkable, new low-wattage, high-efficiency contact heating principle and its possible application to YOUR problems. Write for our booklet which shows how H. & A. units can be engineered in nearly any size, shape and capacity . . . to fit pipes, valves, cylinders and containers carrying viscous or free flowing fluids, chemicals, gases . . . to maintain exact temperatures without hazard. Fixed or flexible elements may be encased in metal . . . or in flexible housings . . . of rubber, thermo-plastic or non-corrosive materials (for immersion in acids, if desired) . . . to keep mechanical and electronic devices functioning and control critical steps of chemical processes.

Our highly specialized, completely equipped plants, our engineering and research facilities, our extensive and successful experience are at your service.

Write us for the facts, addressing Engineering Department, 92 Leroy Avenue, Buffalo 14, N. Y.

H & A
Manufacturing Co. Inc.
PLANTS IN BINGHAMTON AND BUFFALO, N. Y.

YOU GET EVEN GREATER ACCURACY— FASTER HONING with the IMPROVED SUNNEN PRECISION HONING MACHINE

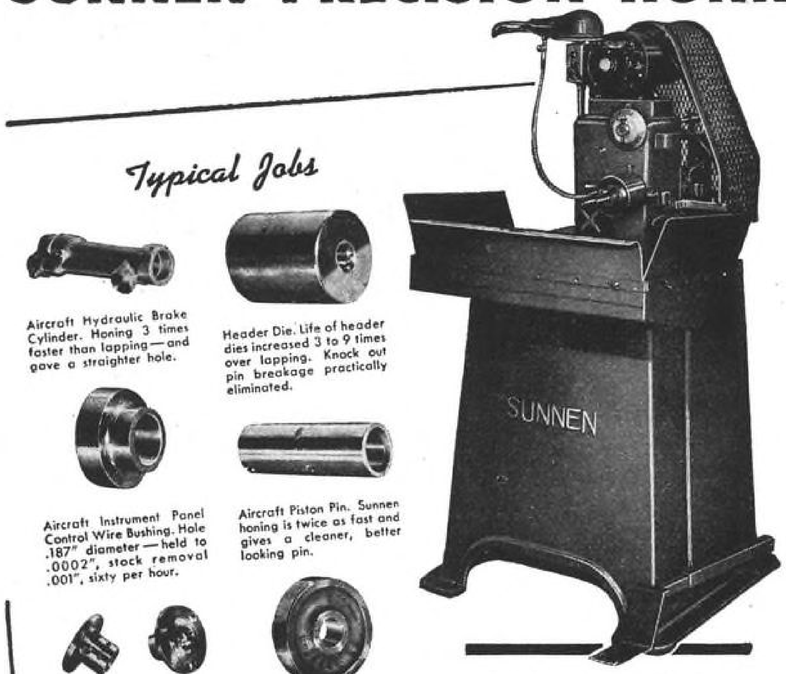

Sunnen Precision Honing Machine handles any internal diameter from .185" to 2.625" in any metal or plastic except lead and babbitt.

The coveted Army-Navy "E" waves over the Sunnen plant—evidence of the important part Sunnen equipment is playing in the war effort.

A new base, including a pump for providing a constant flow of honing fluid to the honing mandrel and stone. The flow of honing fluid acts as a coolant, carries away cuttings, and keeps the stone in sharp cutting condition. Accuracy and honing speed are considerably improved.

Adequate settling basins and baffles are provided so that no cuttings or abrasive can be pumped into the fluid lines. Flow-back pans are adjustable so that they do not interfere with the work. Pumps and coolant tank capacity are adequate to supply a constant flow of fluid.

In addition, a machine light is furnished for inspecting finish of work and for gaging completed parts.

The Sunnen Precision Honing Machine provides absolute interchangeability of parts because tolerances can be held to well within .0001" and produce holes that are honed straight and true without taper or bell-mouth.

Parts last longer because it produces a super-smooth finish of from 2 to 3 micro inches. It's easy to set up and does not require skilled labor for operation.

Write for free bulletin — or ask a Sunnen engineer to give you complete information on how Sunnen honing can be used in your plant.

SUNNEN PRODUCTS COMPANY — 7492 Manchester Avenue, St. Louis, Missouri

Canadian Factory: Chatham, Ontario

Wherever the *solid* is wasteful... wherever the beauty and corrosion-resistance of stainless, the colorful value of copper, the richness of silver, the wearing ability of special alloys are *surface* requirements . . . SuVeneer Clad Metal makes its post-war bid. *Strip steel, inseparably bonded with other metals—one side or both sides, in specified thickness.*

SuVeneer* CLAD METAL

*Trademark Reg. U. S. Pat. Off.

Superior Steel CORPORATION CARNEGIE · PENNSYLVANIA

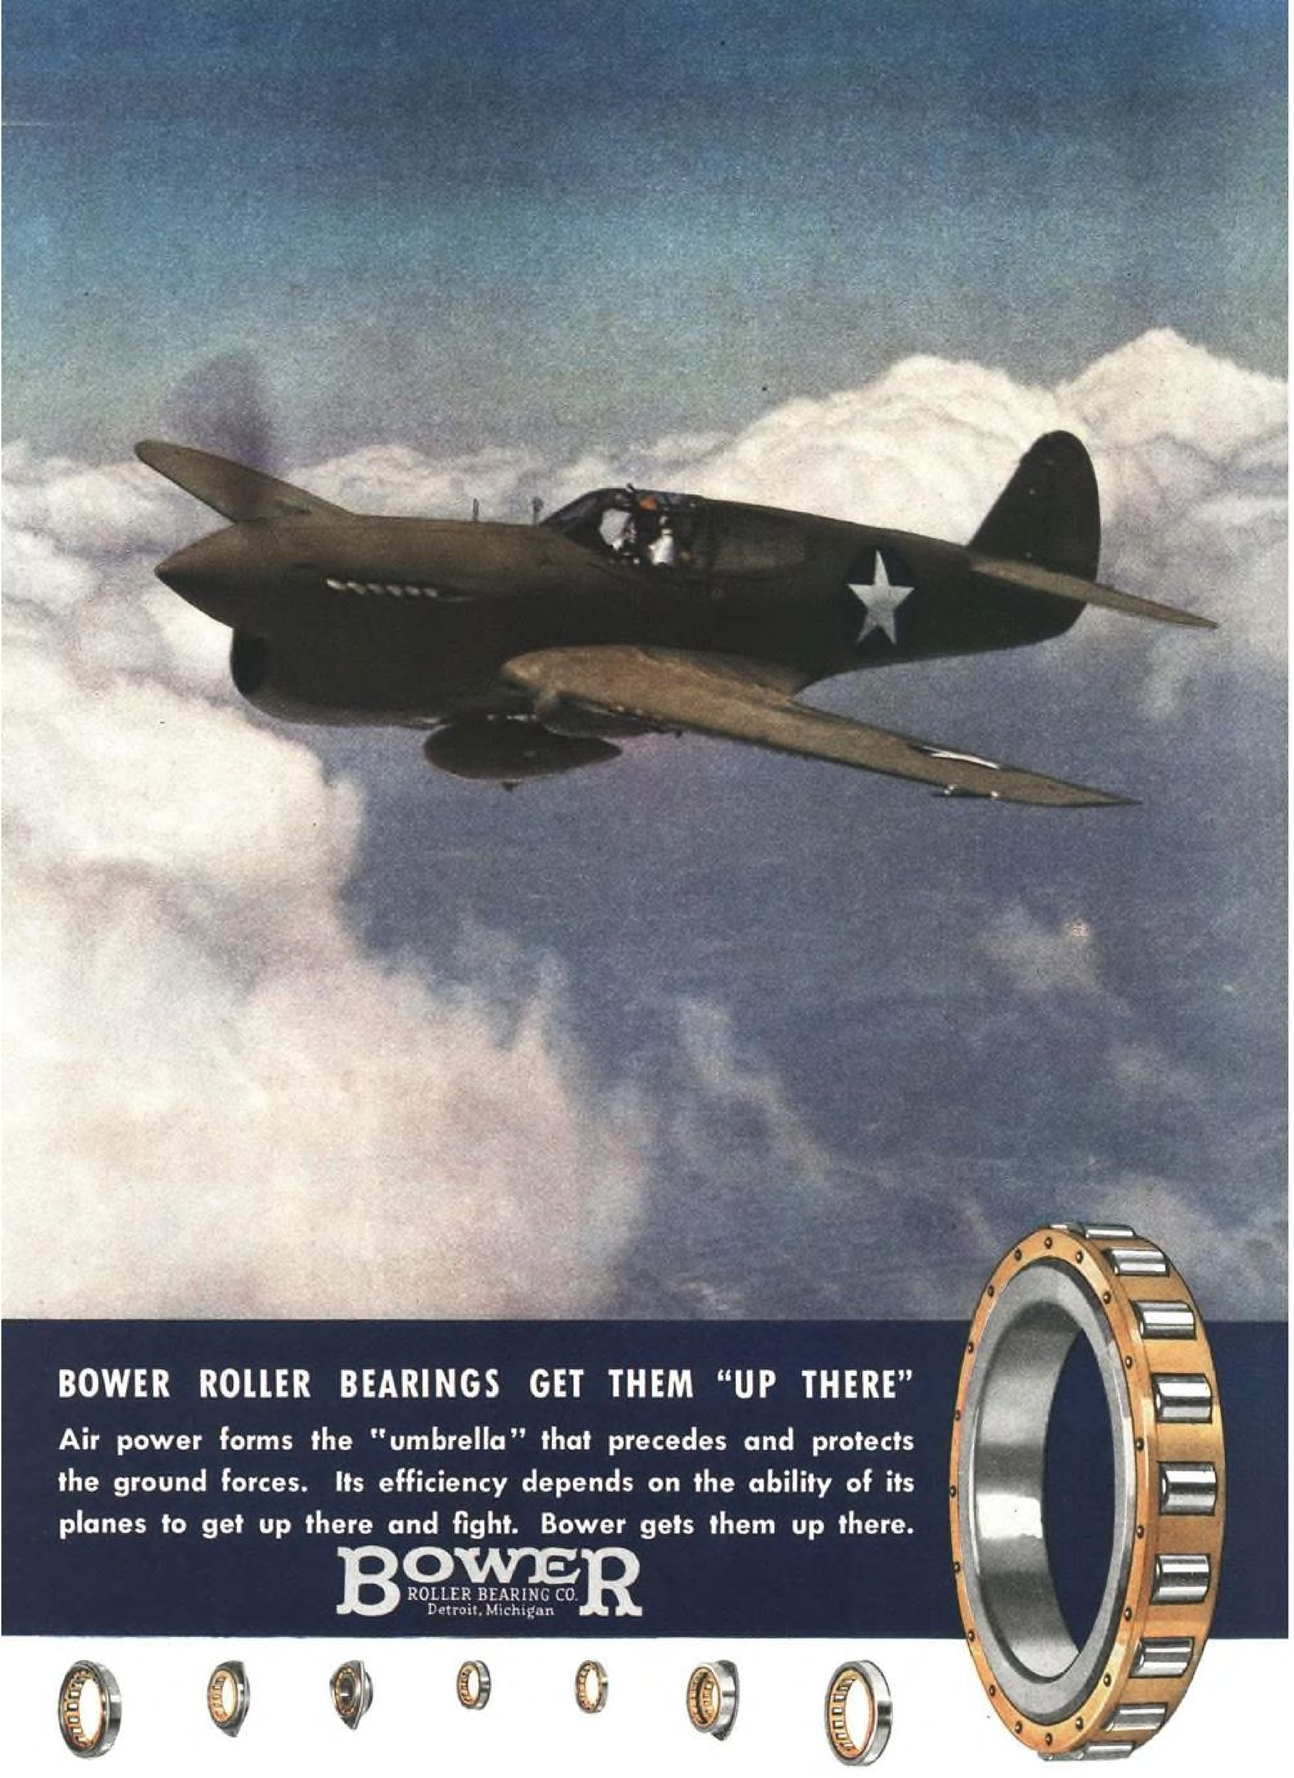

BOWER ROLLER BEARINGS GET THEM "UP THERE"

Air power forms the "umbrella" that precedes and protects the ground forces. Its efficiency depends on the ability of its planes to get up there and fight. Bower gets them up there.

BOWER
ROLLER BEARING CO.
Detroit, Michigan

QUIZ for plane-minded readers

If you can answer nine of these questions correctly, you're good!

A score of eight correct answers is fair, and seven is average.

1. What fighter plane earned the name "B-40" by dropping 1,000 lb. bombs on Jap targets in Burma?

2. What plane has been called "the world's fastest fighter?"

3. What is conceded to be the "fastest bomber in the world?"

4. What is the name of Britain's heaviest bomber?

5. What fighter plane became known as the "tank buster" in the North African campaign?



6. Who powers the Mustang, Warhawk, Hurricane, Mosquito, and Lancaster — and the famous PT boats?

7. What is the finest surface measurement used in making Packard - built Rolls - Royce aircraft engines?

8. What enables the Mustang P-51 to fight 2 miles higher than before?



9. What does a two-stage two-speed supercharger do?



10. The top speed of blades in a Packard-built supercharger equals: an express train? A rifle bullet? Sound?

11. What famous fighting boats depend for their speed on aircraft-type engines?



12. "A" weighs 4 times as much as "B". Is "A" only 4 times as powerful as "B"? 6 times? 12 times?



13. Can new methods used in making war engines (like nitriding, above) help to build better postwar cars?

ANSWERS:

1—P-40 Warhawk. **2**—Mustang P-51. **3**—Mosquito bomber. **4**—Lancaster 4-motor bomber. **5**—Hurricane. **6**—Packard (Rolls - Royce engines for the planes; Packard marine engines for PT's). **7**—Millionths of an inch. **8**—A Packard-built 2-stage 2-speed supercharger. **9**—Packard-built 2-stage 2-speed superchargers compress thin air, permit high-power performance even in the stratosphere. **10**—A rifle bullet and sound. **11**—Navy PT boats (powered by Packard marine engines of aircraft-type design). **12**—12 times. **13**—Yes, many of them. Your future Packard will be better built, longer lasting, more economical as a result.

ASK THE MAN WHO OWNS ONE

MUSTANG fighter

WARHAWK fighter

HURRICANE fighter

PACKARD
Precision-built Power

LANCASTER bomber

MOSQUITO fighter - bomber

NAVY PT boats

HOW TO GET .0005 TOLERANCE IN A BOLT

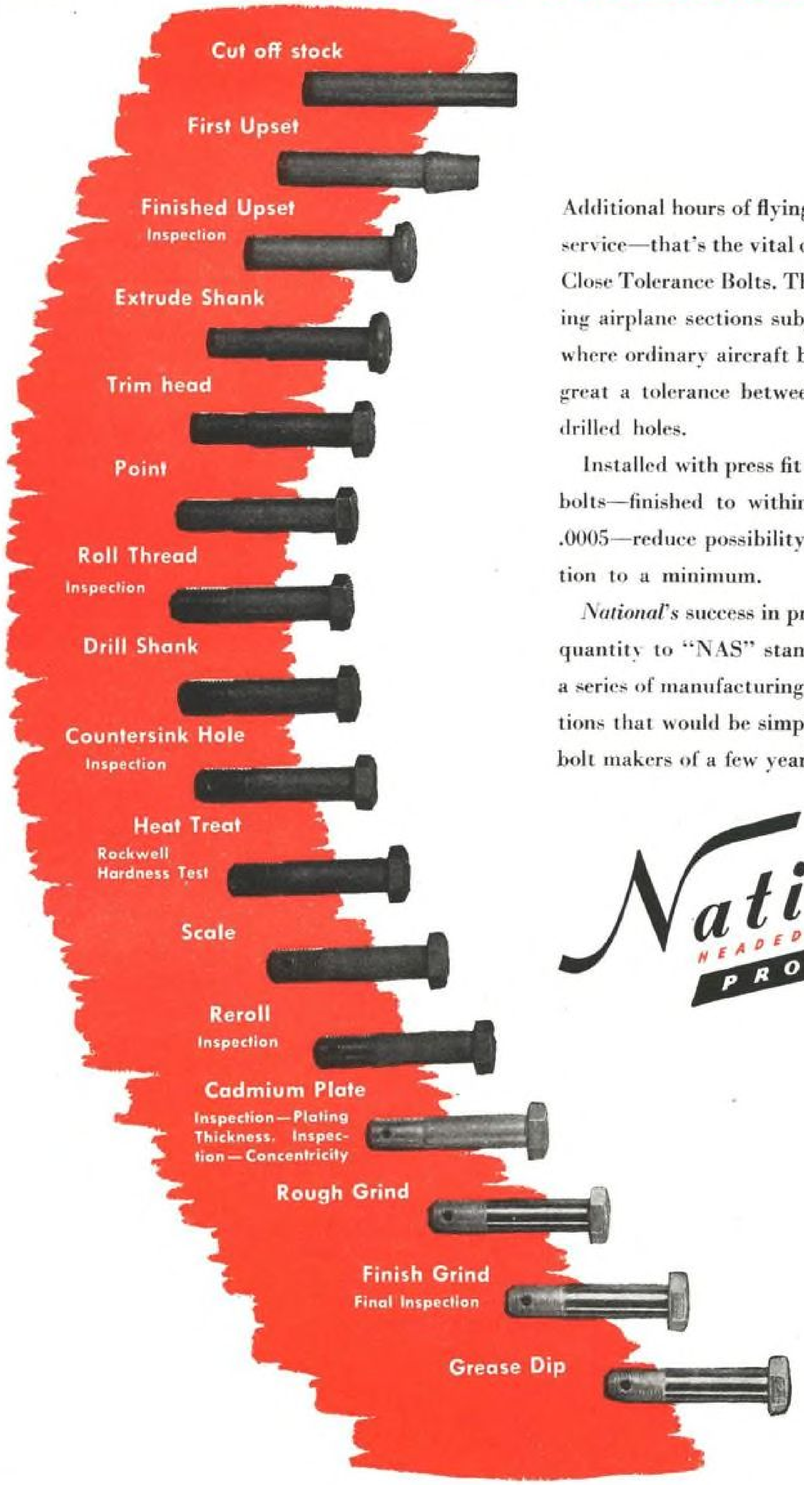

Additional hours of flying time before requiring service—that's the vital contribution of "NAS" Close Tolerance Bolts. They are used for fastening airplane sections subject to unusual stress, where ordinary aircraft bolts would permit too great a tolerance between bolt diameters and drilled holes.

Installed with press fit in reamed holes, these bolts—finished to within a total tolerance of .0005—reduce possibility of wear through friction to a minimum.

National's success in producing these bolts in quantity to "NAS" standards, is the result of a series of manufacturing and inspection operations that would be simply unbelievable to the bolt makers of a few years ago.

National
HEADED AND THREADED
PRODUCTS



THE NATIONAL SCREW & MFG. CO., CLEVELAND 4, O.

PUT YOUR VALVE-PROBLEM UP TO MEN WHO KNOW!

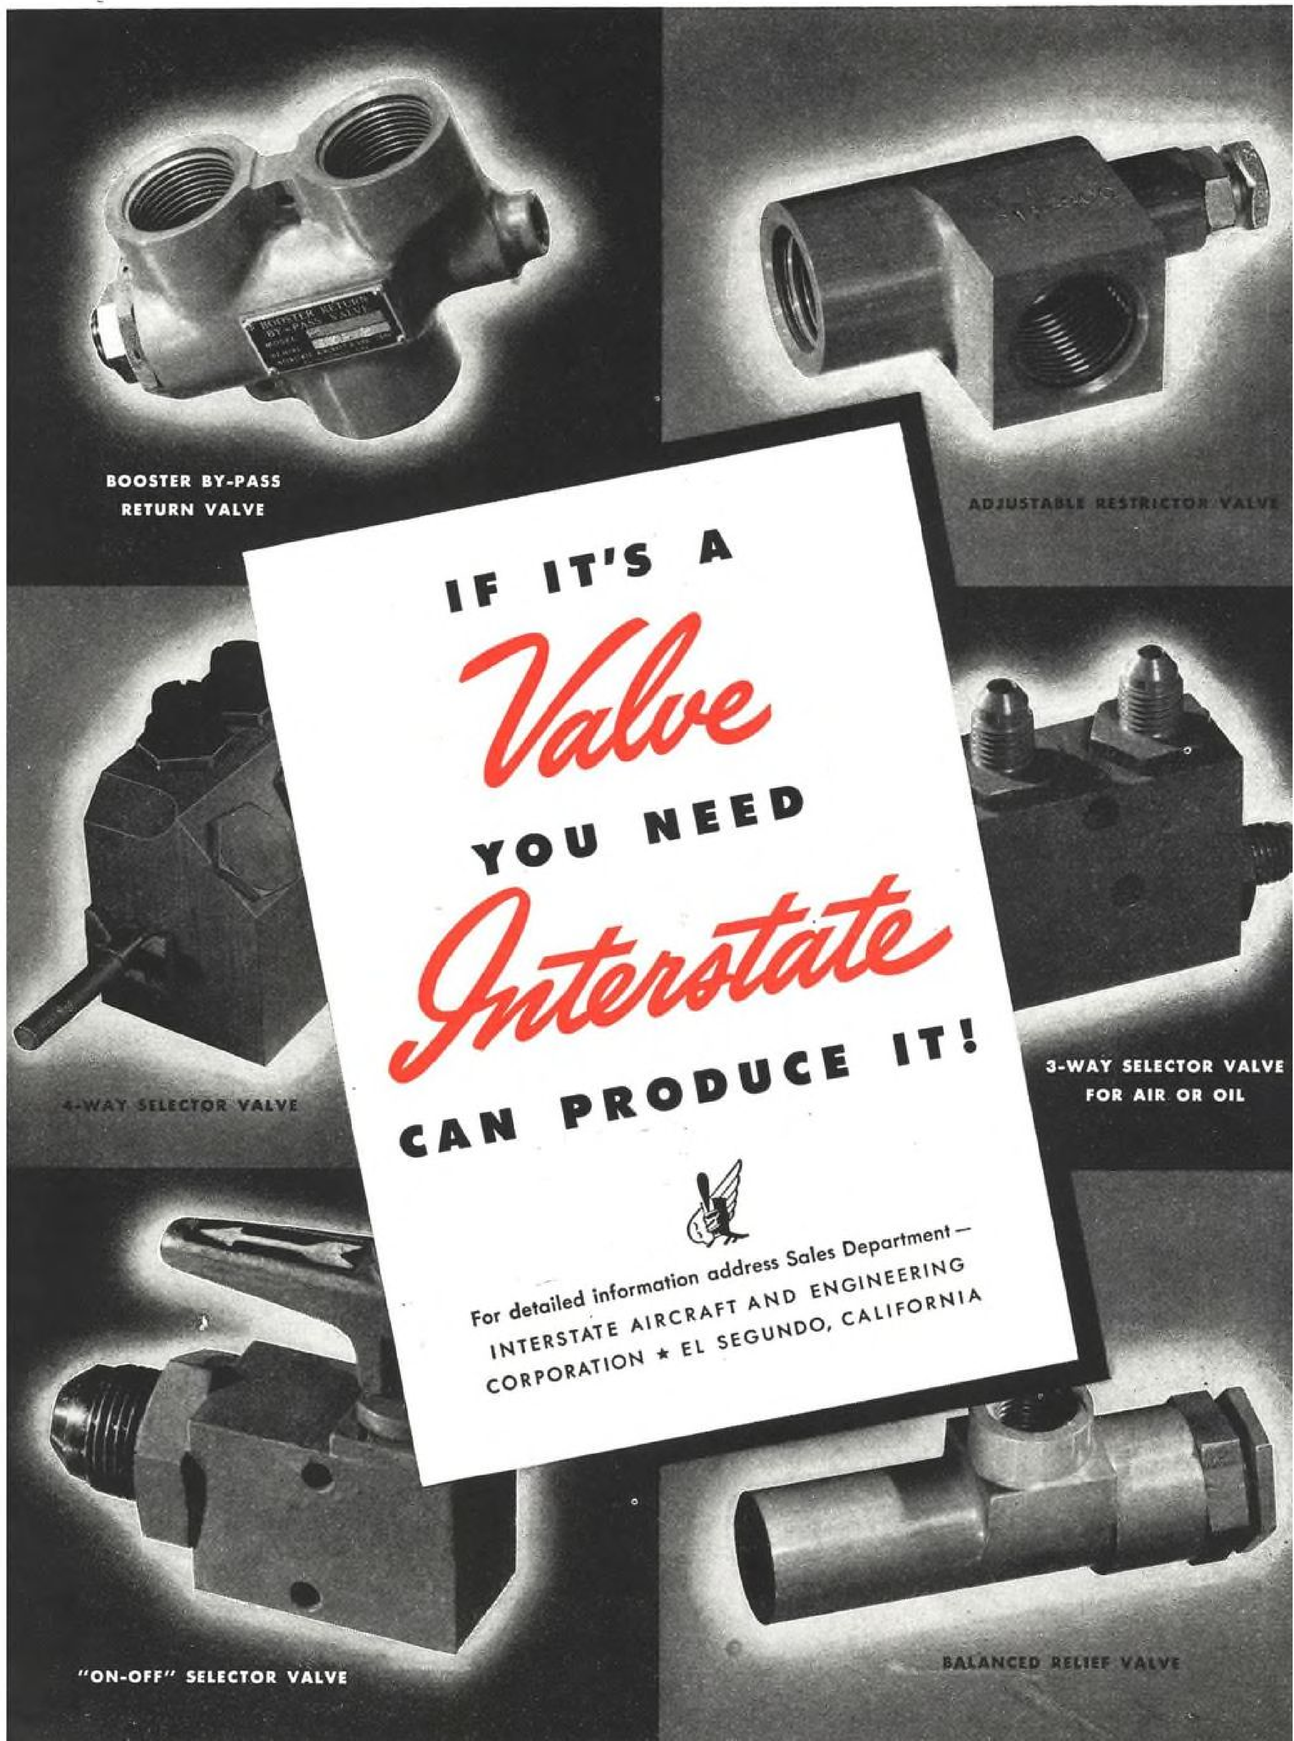

Simmonds PUSH PULL Controls

win the YELLOW DOT of Army Air Force Winterization Approval

As a result of their proven performance under severe Arctic conditions, Simmonds-Corsey Push-Pull Controls have won new honors — the Yellow Dot of approval by the U. S. Army Air Force Winterization Program. Thousands of hours of operation at temperatures down to 65 below zero have confirmed laboratory experiments which indicated the low frictional qualities of these controls.

More than 250,000 of these precision-built controls have been installed on the fighting planes of the United Nations, including the leading U. S. military and transport aircraft. Because of their wide range of applications, they are being used also for marine and automotive units.

Simmonds Equipment Flies With Every Type of Allied Aircraft

Automatic Engine Controls • Chronometric Radiosondes Hydraulic Accumulators • Self-Aligning Rod-End Bearings Cowling and Panel Clips and Fasteners • Push-Pull Controls Equipment and Components For Hydraulic Systems • Spark Plugs • Hydraulic Fuse •

Simmonds Aerocessories Of Canada, Ltd.
Sun Life Building, Montreal, Canada

SIMMONDS AEROCESSORIES INC.

30 ROCKEFELLER PLAZA, NEW YORK 20, NEW YORK
6253 HOLLYWOOD BOULEVARD, HOLLYWOOD, CALIFORNIA

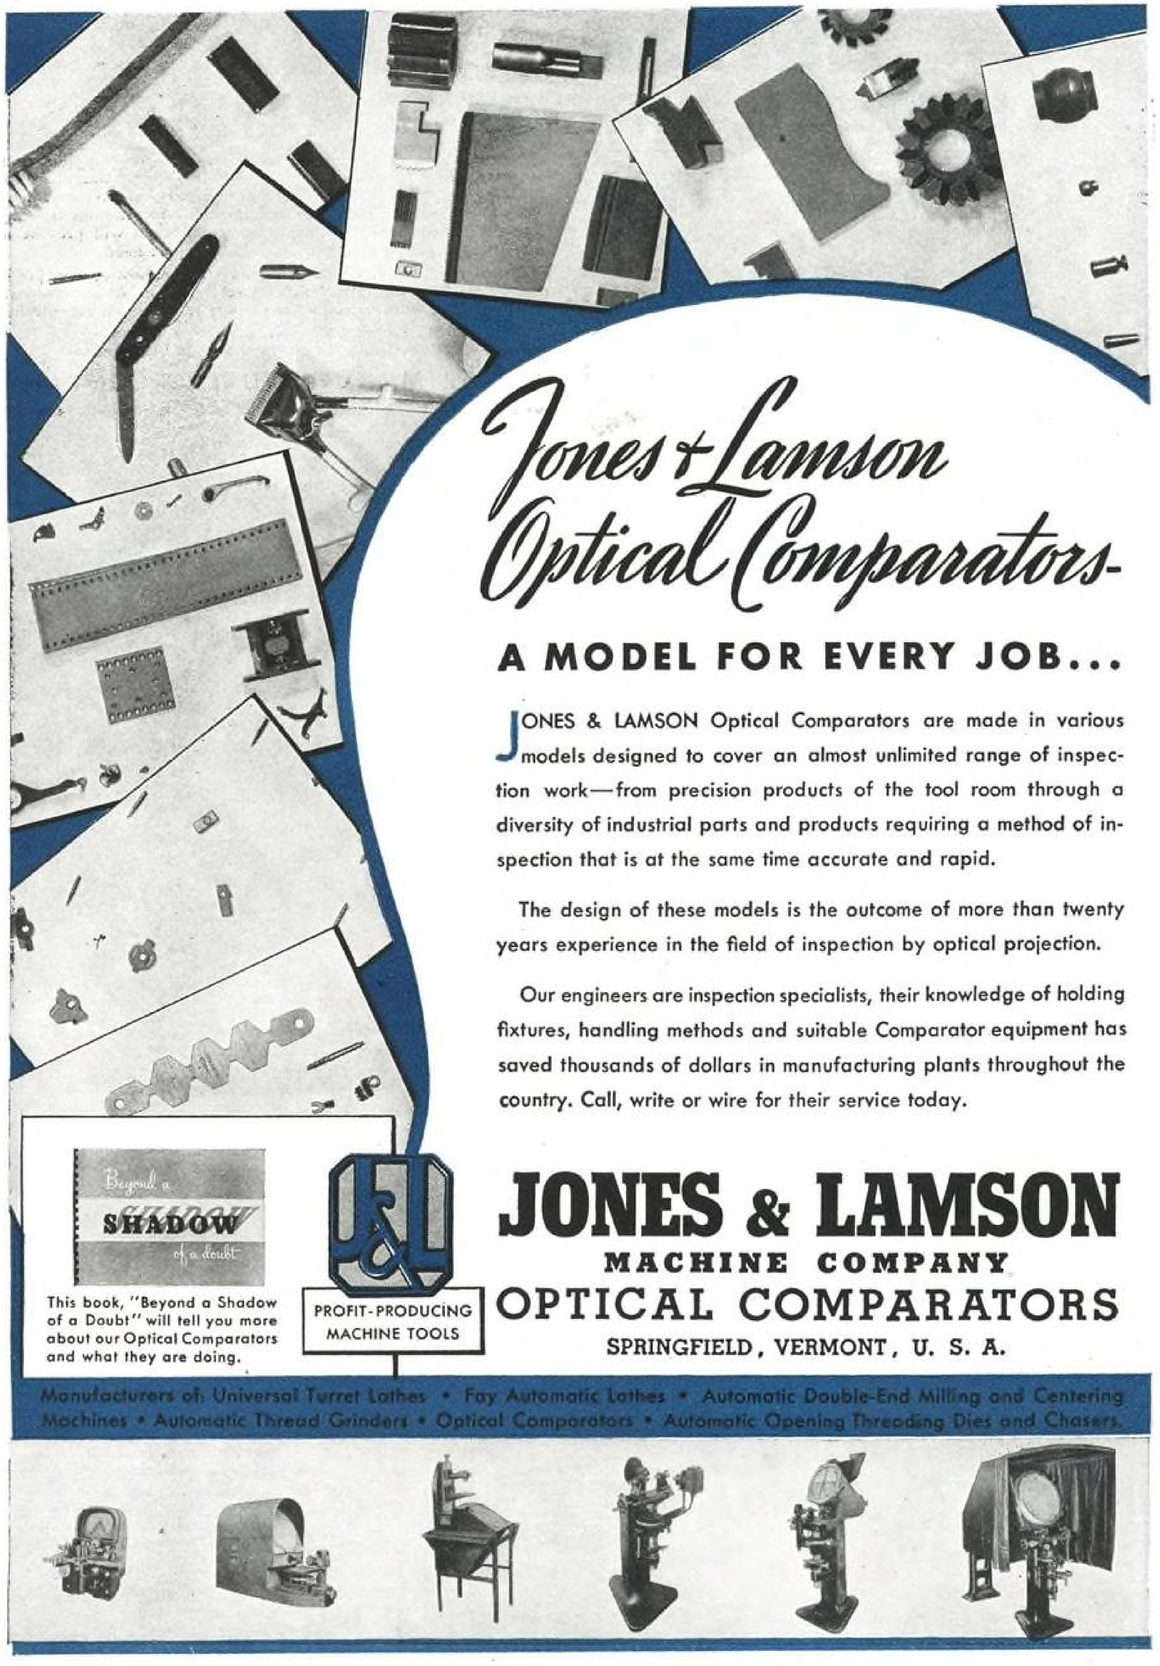

Jones & Lamson Optical Comparators-

A MODEL FOR EVERY JOB...

JONES & LAMSON Optical Comparators are made in various models designed to cover an almost unlimited range of inspection work—from precision products of the tool room through a diversity of industrial parts and products requiring a method of inspection that is at the same time accurate and rapid.

The design of these models is the outcome of more than twenty years experience in the field of inspection by optical projection.

Our engineers are inspection specialists, their knowledge of holding fixtures, handling methods and suitable Comparator equipment has saved thousands of dollars in manufacturing plants throughout the country. Call, write or wire for their service today.

This book, "Beyond a Shadow of a Doubt" will tell you more about our Optical Comparators and what they are doing.

PROFIT-PRODUCING MACHINE TOOLS

JONES & LAMSON
MACHINE COMPANY
OPTICAL COMPARATORS
SPRINGFIELD, VERMONT, U. S. A.

Manufacturers of: Universal Turret Lathes • Fay Automatic Lathes • Automatic Double-End Milling and Centering Machines • Automatic Thread Grinders • Optical Comparators • Automatic Opening Threading Dies and Chasers.

BUTLER BUILT
ALL-STEEL, FIRE-SAFE HANGARS

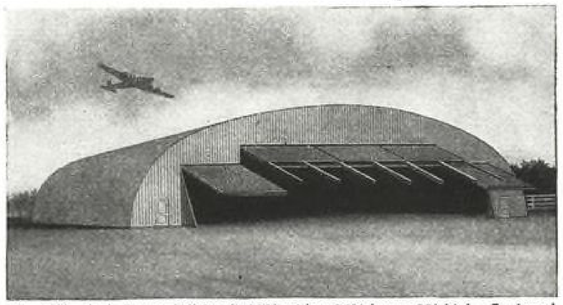

Fig. 460. Arch Frame (All-Steel) 130′ wide x 160′ long x 32′ high. Equipped with overhead doors.

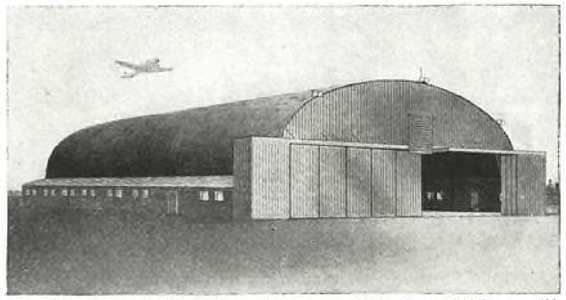

Fig. 462. Butler (All-Steel) Type AFA Hangar 120′ wide x 160′ long x 43′ high with 11′ high side wall and lean-to shop facilities on each side.

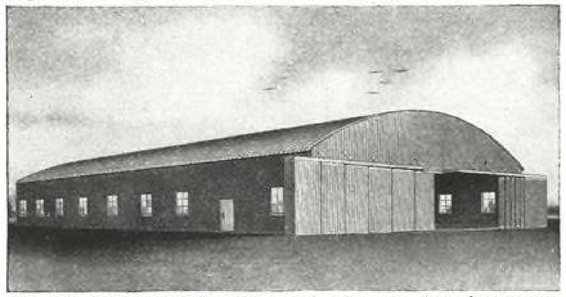

Fig. 469. Butler (All-Steel) Hangar Roof and Doors. Parts for masonry construction may be designed to varying conditions to meet requirements of your architect. Have him contact our engineers.

Fig. 464. Butler (All-Steel) Type RT-100 Hangar 100′ wide x 70′ long x 25′ high. Conventional type regular Butler construction.

Since the early development of airfields, Butler has supplied steel hangars. Out of vast production for lend-lease and for war, many far reaching improvements in design and construction have emerged. When conditions of war permit, Butler will offer the outstanding line of all-steel, fire-safe, economical hangars. It will provide a steel hangar readily adaptable for every airport need.

Butler engineers stand ready to plan with you now on your post-war needs for hangars and other steel buildings and on current needs to the limit war production permits. Address all inquiries to

1245 Eastern Ave., Kansas City 3, Missouri
945 Sixth Ave. S. E., Minneapolis 14, Minn.

BUTLER MANUFACTURING COMPANY

Galesburg, Illinois **Kansas City 3, Mo.** Minneapolis 14, Minn.

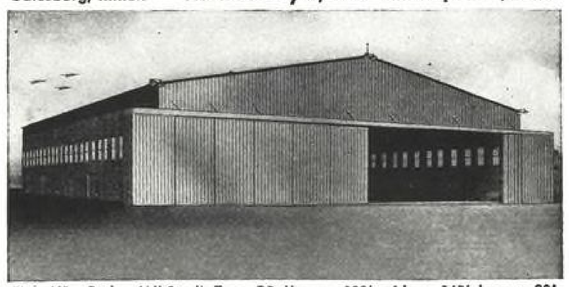

Fig. 461. Butler (All-Steel) Type GR Hangar 122′ wide x 160′ long x 22′ high. Doors may be in one or both ends.

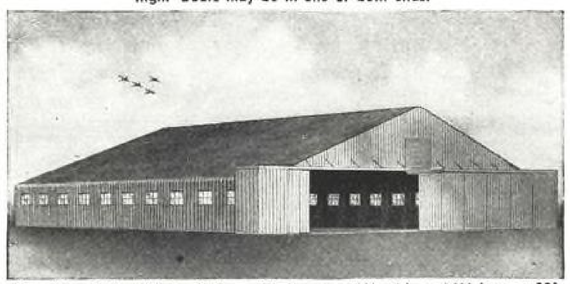

Fig. 463. Butler (All-Steel) Type CH Hangar 130′ wide x 160′ long x 39′ high with frame of light gage cold formed sections.

Fig. 470 (above). Butler (All-Steel) Type MT Hangar. This multiple unit hangar is designed for 4 planes but can be increased in accordance with requirements. 30′ wide, 118′ long and 12′ high with 9′ clear opening door.

*Fig. 467 (bottom left). Butler (All-Steel) Type T-RR Hangar. Front of hangar 40′ wide, 12′ feet deep and 9′ high; tail shed 14′ wide, 14′ long and 7′ high.

*Fig. 466 (bottom center). Butler (All-Steel) Type T-GA Hangar. Front is 40′ wide, 12′ deep and 9′ high; tail shed 14′ wide, 16′ long and 8′ high.

*Fig. 468 (bottom right). Butler (All-Steel) Type T-GB Hangar. Front is 40′ wide, 14′ deep and 9′ high; tail shed 14′ wide, 14′ long and 7′ high.

*These types provide the individual flyer with safe, tamper-proof storage. Dimensions shown may be altered to meet post-war plane sizes.

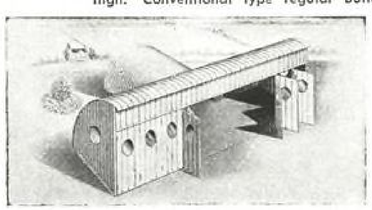

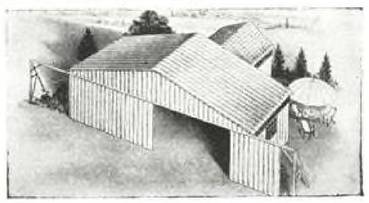

PN

Socketype
CABLE TERMINALS
Socketnut
ROD END TERMINALS

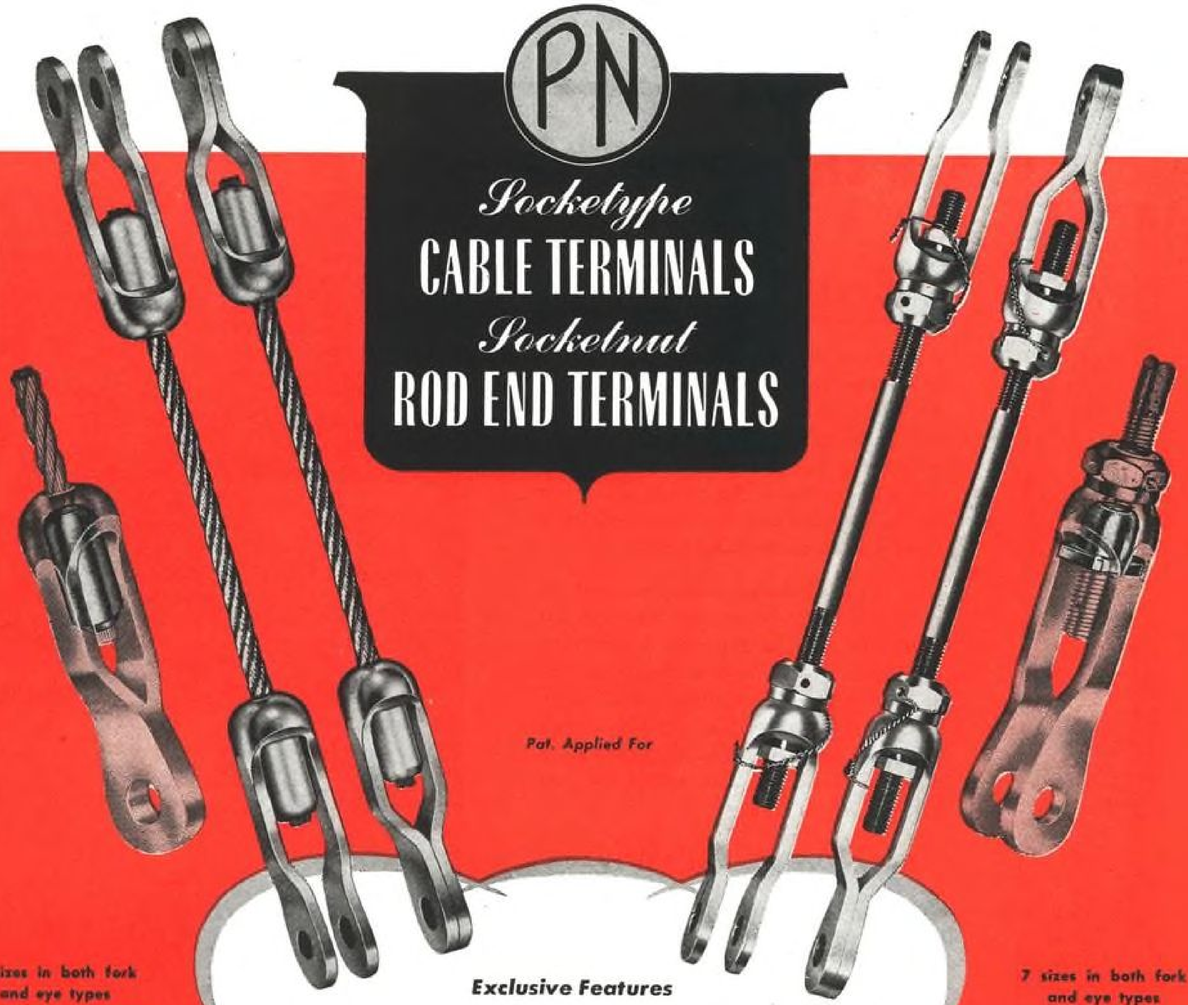

Pat. Applied For

9 sizes in both fork and eye types

1/16″ • 3/32″
1/8″ • 5/32″
3/16″ • 7/32″
1/4″ • 9/32″
and 5/16″ Cable sizes

Other Sizes Made to Order

Exclusive Features

★ Low Cost
★ Interchangeability
★ Simplified Swaging
★ Speeds Cable Assembly
★ Saves 90% on Critical Material
★ No Engineering Change Necessary
★ High Strength
★ Prompt Deliveries
★ Interchangeability
★ Reduced Service Stocks
★ No Tightening Distortion
★ Made of Non-Critical Material

Approved as interchangeable with B and C types of present standard AN 667 and 668

Rods furnished on special order to customer's specifications

7 sizes in both fork and eye types

4-40 • 10-32
1/4-28 • 8-32
12-28 • 5/16-24
3/8-24

Other Thread Sizes Made to Order

New Specification Sheet and Folder Available to Industry Personnel

POULSEN & NARDON, INC.
Terminal Box 2398
LOS ANGELES 54, CALIF.

Ask these fellows what a drum is worth

American boys in the South Pacific are a long way from home. But good American gasoline and oil are always with them — to help keep their planes in the sky and their tanks moving forward. And that gasoline and oil is delivered in *drums*—drums that are as essential as guns.

The value of drums today cannot be measured. *All* drums are needed. *No drum* is easy to replace. A scarcity of drums would be disastrous. Every user of drums can help prevent it by keeping the old ones in service as long as possible — and moving as fast as possible. You will be doing *your* share if you

Empty Drums Promptly
Handle Drums Carefully
Return Drums Quickly

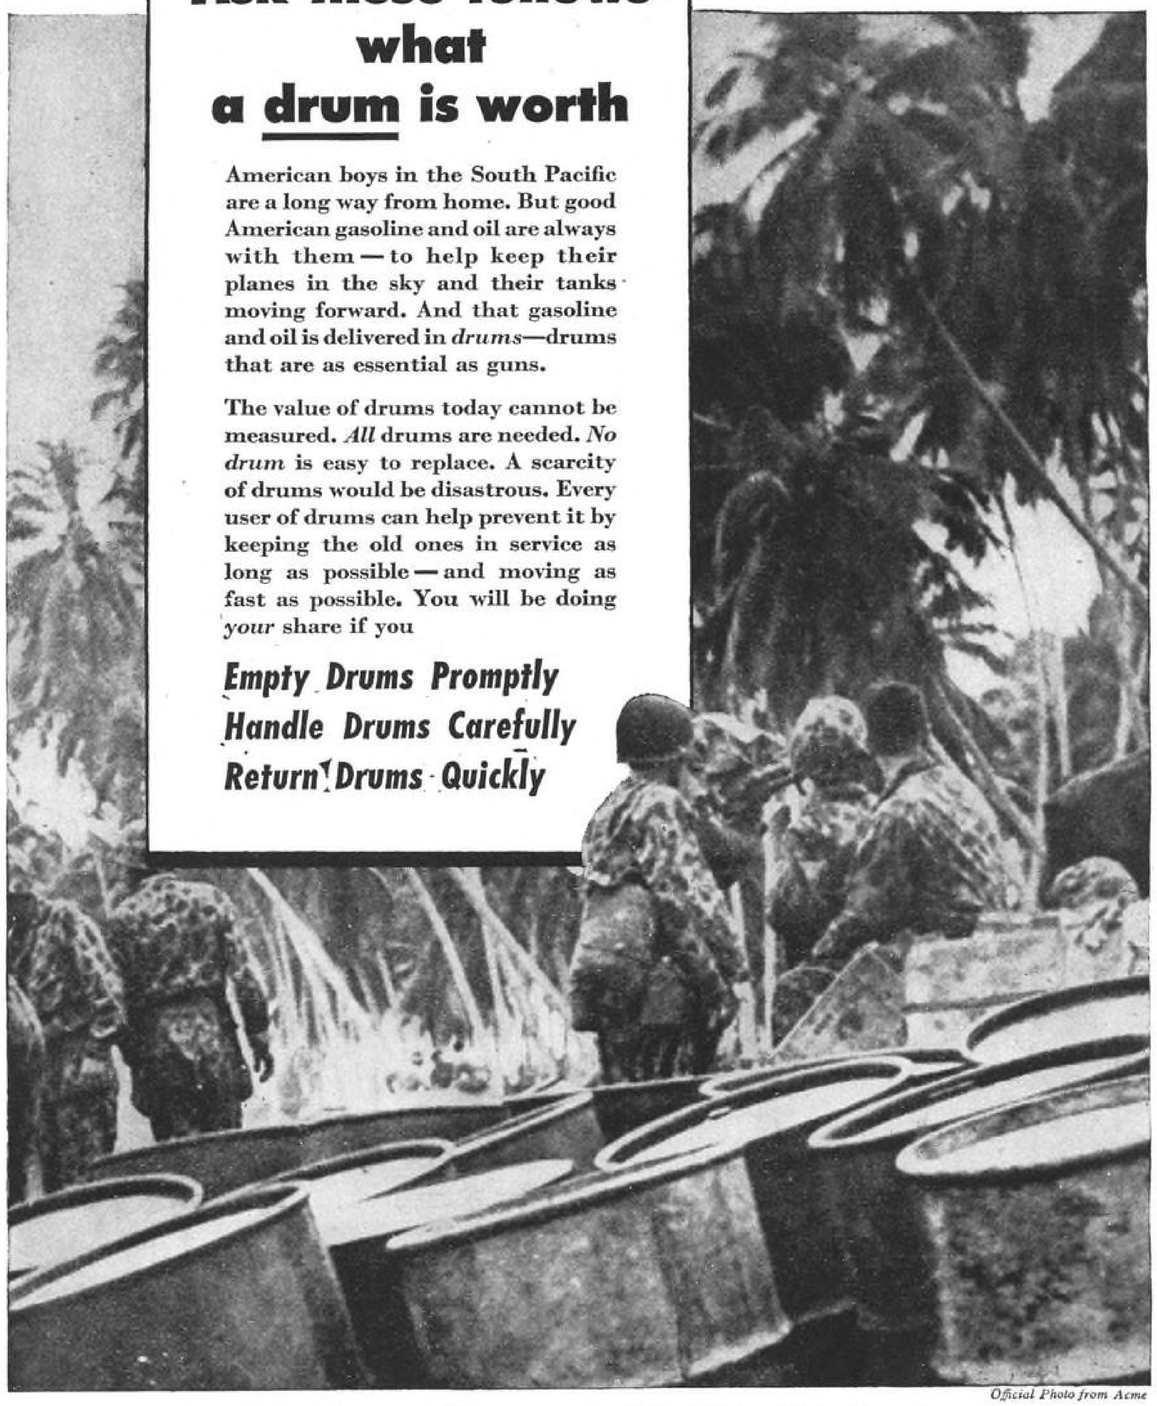

Official Photo from Acme

Reprints of the above message, for poster use, will be gladly furnished without charge

AMERICAN FLANGE & MANUFACTURING CO., INC., 30 ROCKEFELLER PLAZA, NEW YORK 20, N. Y.
TRI-SURE PRODUCTS LIMITED, ST. CATHARINES, ONTARIO, CANADA
Makers of **Tri-Sure** *Closures*

No. 675-B
High Production Press

LAMINATION MANUFACTURERS

Put Precision Dies in High Production Press and Obtain--

MAXIMUM DIE LIFE by maintaining alignment of slide even under severe off-center loads through use of two connections and square gibbing finished to a high degree of accuracy. Frame members are keyed and shrunk together by preloaded tie rods.

CONVENIENCE. All adjustments within easy reach of operator. Dies accessible from front and back. Opening under bed permits use of stackers, conveyors or tote boxes. *Special foundations are not required.* Motor drive is mounted on top of press out of way.

VERSATILITY. Press can be mounted on inclined or inclinable legs for use with compound dies and can be set upright for progressive dies. Double roll feed or single roll feed can be mounted on the right or left. A combination roll feed and finger feed is available for *scrapless* lamination jobs using strip stock. Feeds adjustable up to 40" in length and press capacities up to 200 tons are standard. Speeds on lamination work range up to 300 strokes per minute.

MINIMUM MAINTENANCE. Bronze lined gibbing and bronze bushed shaft bearings. Force feed lubrication to all main bearings. Parts easily accessible for replacement. *Electric safety controls* to supplement operator when press operates at high speed.

BLISS BUILT — MARQUETTE · BLISS · TOLEDO · CONSOLIDATED

E. W. BLISS COMPANY

53rd Street & 2nd Avenue, Brooklyn 32, New York

TOLEDO, OHIO · CLEVELAND, OHIO · SALEM, OHIO · HASTINGS, MICHIGAN · DETROIT, MICHIGAN
CHICAGO, ILL. · ROCHESTER, N. Y. · NEW HAVEN, CONN. · PHILADELPHIA, PA. · BOSTON, MASS.

E. W. BLISS COMPANY OF CANADA, LTD., TORONTO, ONTARIO, CANADA

Agents
Moore Machinery Company, Los Angeles and San Francisco, California

Gentlemen...how are your arteries?

★ Ever stop to think how much the arteries of a plane are like those of the human body? If the flow through man's arteries is halted, he dies. If the movement of air, oil, gasoline or water through the arteries of a plane fails, it well may bring the unwelcome report that "one of our planes is missing".

Here at AFCO, we do not profess to know too much about the human arteries. We believe, though, that AFCO Fittings offer one of the best means of keeping plane arteries healthy and functioning. These parts are made by skilled workers with modern machinery. Threads are cut clean as a whistle. Holes are reamed concentric to outside threads by a few thousandths. Extreme care in production is responsible for the definite absence of chaser marks. And special packing before shipment prevents those nicks and burrs which might cause rejects at the plane assembly plants.

Certainly, there are many things that go into a plane. Many larger, but few more important than fittings. Perhaps that is why so many men in design, production and maintenance fields have a decided preference for AFCO Fittings. They have a mighty good answer, too, should someone ask . . . "Gentlemen, how are your arteries?"

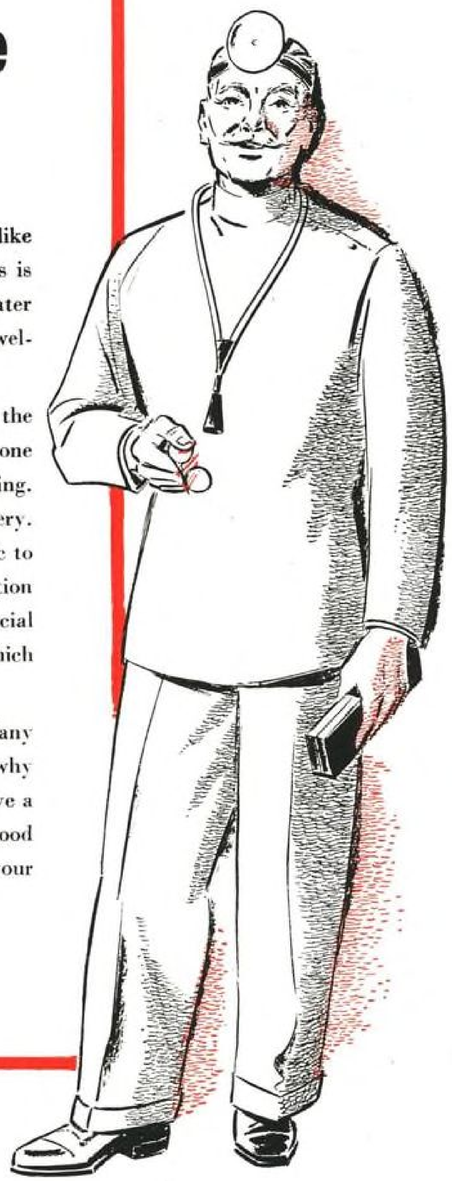

AFCO Fittings

NEW "AN" TUBE, PIPE AND HOSE FITTINGS

FITTINGS OF QUALITY FOR PLANES OF WAR AND PEACE

The Aircraft Fitting Company • 1400 East 30th Street • Cleveland 14, Ohio

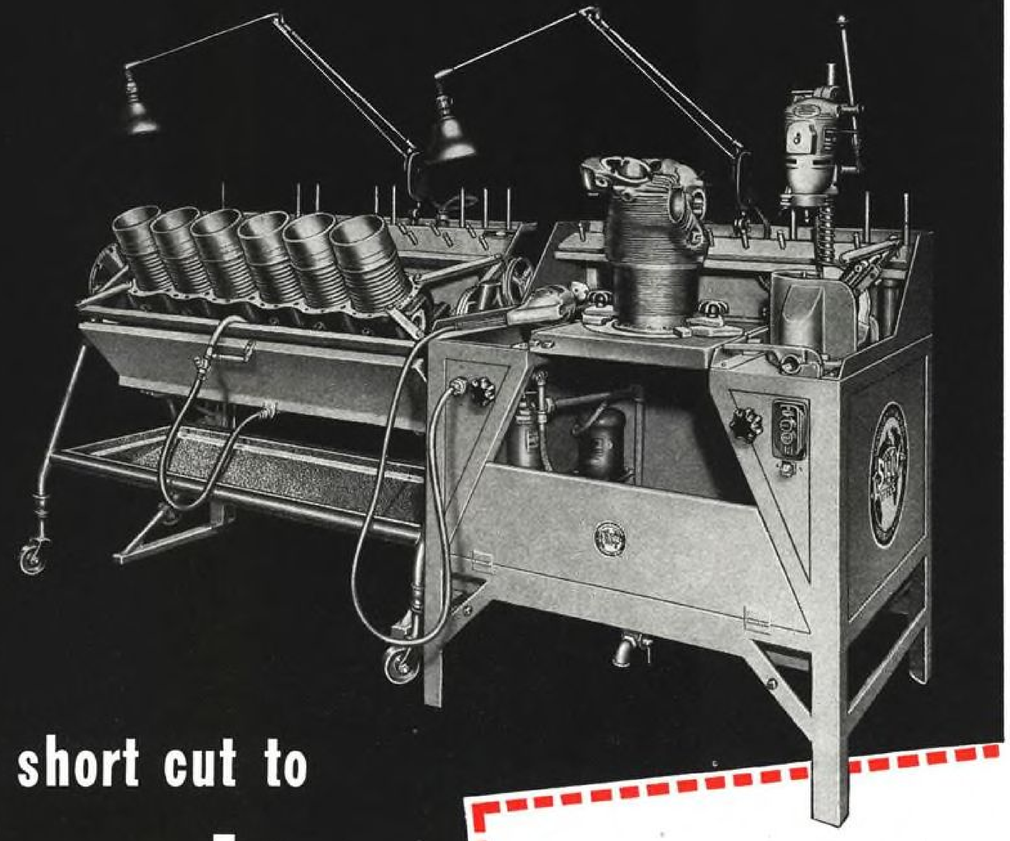

The short cut to Speed Efficiency & Precision

Production and maintenance schedules are being stepped up with this wet valve seat grinding machine on In-line and Radial Aircraft motors because accuracy and dependability are built right into the machine.

SIOUX

AIRCRAFT wet valve seat GRINDING MACHINE for IN-LINE and RADIAL MOTORS

Write at once for full details

STANDARD THE WORLD OVER

ALBERTSON & CO., INC. SIOUX CITY, IOWA, U. S. A.

THAT EXTRA 10 M.P.H.

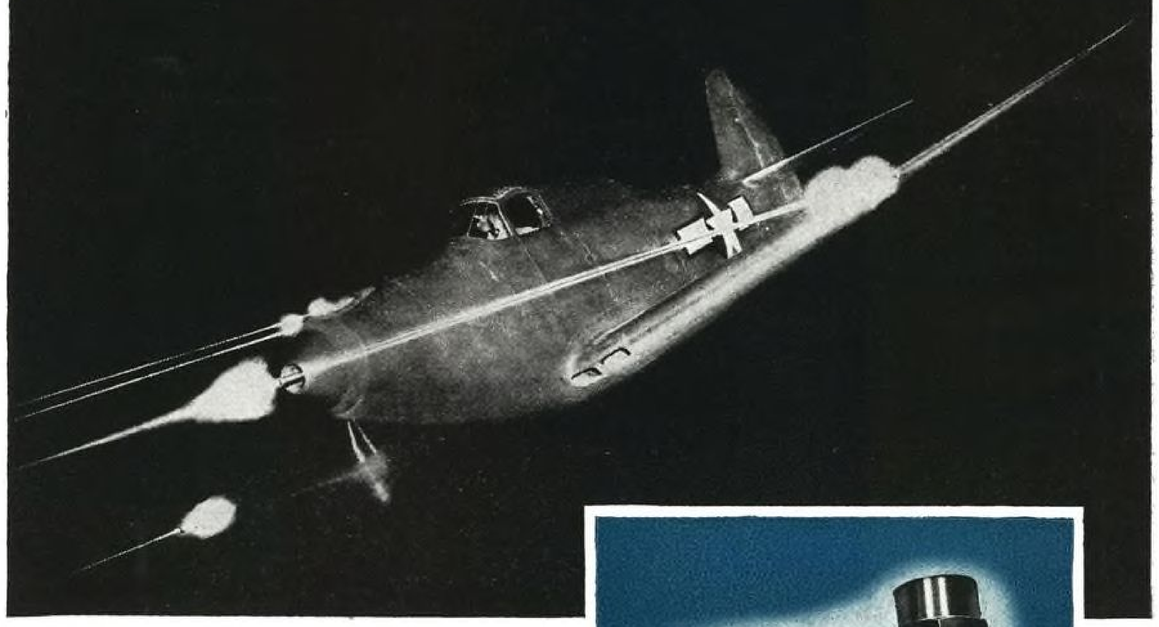

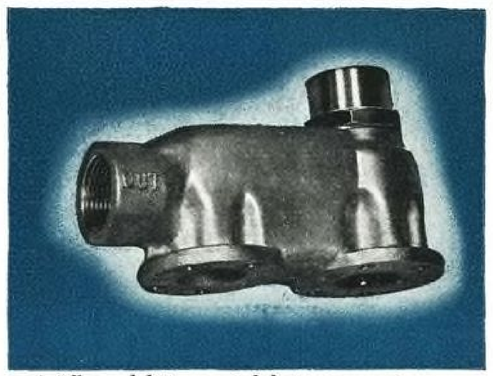

A fully modulating control device, responsive to both temperature and pressure. Protects oil cooler from damage by high-pressure surges, and controls oil temperatures.

IN AERIAL COMBAT an extra 10 M.P.H. is often the difference between victory or a sudden intimate acquaintance with a parachute. For peak performance, engines simply *must* be correctly lubricated . . . there's no place for cold-sluggish or heat-thinned oil when the chips are down.

By holding circulating engine-oil temperatures within narrow limits, a Fulton Sylphon Control Device "flattens" the oil viscosity curve, automatically maintaining correct motor lubrication, even under the most exacting conditions.

Fulton Sylphon products are essential parts in thousands of aircraft engines . . . *automatically* regulating pressures and temperatures . . . helping to put an extra 10 M.P.H. into the throttle. Write for Bulletin JA-822, which describes the latest developments in Fulton Aircraft Instruments.

FULTON SYLPHON

TEMPERATURE CONTROLS — BELLOWS . . . BELLOWS ASSEMBLIES

THE FULTON SYLPHON CO., KNOXVILLE 4, TENNESSEE

Protecting the Airplane's "Vitals"!

● Safeguarding both men and instruments in modern planes, Western Felt is playing a versatile role in all sorts of mechanisms.

Felt protects men through its use as weatherstripping, pads, thermacoustic cabin lining, insulation.

Flexible, resilient, compressible, resistant to age, water, heat and shock—felt protects delicate instruments through its use as channels, gaskets, pads, washers, cushioning gaskets.

Western engineers are prepared to give you the complete story of felt's place in modern planes, and to suggest new uses for this versatile material in *your* product. Write us today.

WESTERN FELT WORKS
4035-4117 Ogden Avenue, Chicago 23, Illinois
Branch Offices in all Principal Cities

WESTERN *Felt*

Largest Independent Manufacturers and Cutters of Wool, Hair and Jute Felts

A STOUT HEART

FOR D. C. AIRCRAFT MOTORS

★★★ KLIXON PROTECTORS

Motor limits don't mean a thing to a pilot with a Zero on his tail. He gives his plane the works. He's fighting for his life. Nothing else matters. So what happens?

One thing, the D. C. motors that operate the driving flaps, fuel pumps and other parts of the plane might be overloaded. And when they are overloaded too much, those motors burn out, *unless* those motors have a "Stout heart".

By a "Stout heart" we mean a built-in Klixon Protector which automatically recycles the motor . . . turns the motor off when it is too hot and turns it on again when it is cooled to a safe operating temperature . . . thereby preventing a burn-out and keeping the motor in action until our pilot gets his Zero and reaches his base in safety.

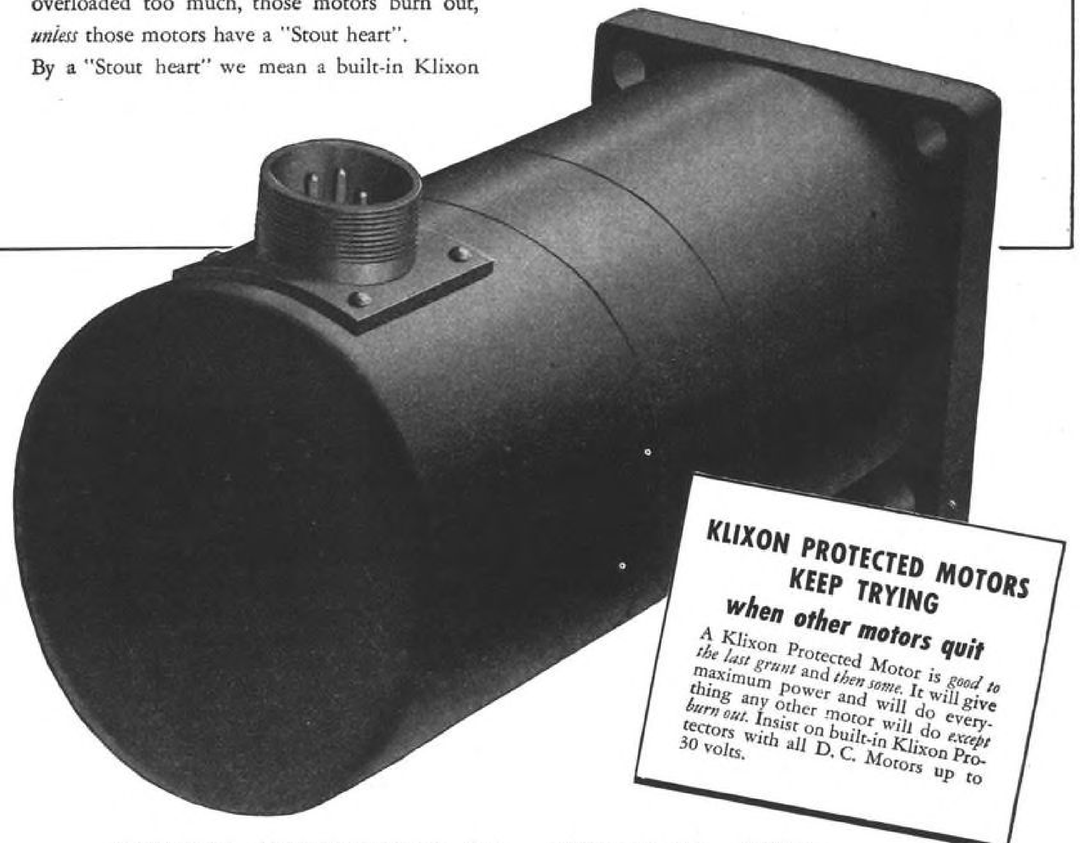

KLIXON PROTECTED MOTORS KEEP TRYING

when other motors quit

A Klixon Protected Motor is *good to the last grunt* and *then some*. It will give maximum power and will do everything any other motor will do *except burn out*. Insist on built-in Klixon Protectors with all D. C. Motors up to 30 volts.

SPENCER THERMOSTAT CO., ATTLEBORO, MASS.

Meet "Flash" Jonesey, champ of the soap box derby. He built that job with his own two hands and his old man's basement tools. . . . He's the great American dream, and the hope of this cockeyed world.

For it's because America raises kids like Jonesey that America is winning this war. Kids who were weaned on mechanical toys, and cut their eyeteeth on tools. Kids who grew up to be the finest fliers and fighters, engineers and builders the world has ever seen. . . . And it's because of millions of kids like Jonesey that America will have a priceless legacy of the world's finest skills, after this war is won.

The responsibility to use those skills wisely and well is one of the greatest industrial challenges ever to face this nation.

If you are a manufacturer, there is one thing that you can do at once: Have your production men and planners consult now with the engineers of the basic machine tool producers. They can help you in planning ahead the difficult task of reconverting your own skills and machinery to an all-out peacetime production.

One of these engineers is a Bryant man — and his specialized knowledge of internal grinding machinery is important to the manufacture of literally *everything* that will mean jobs and prosperity after the war . . . that will make America's priceless legacy a new hope for the world.

BRYANT CHUCKING GRINDER COMPANY SPRINGFIELD VERMONT, U. S. A.

End of the line–change for Kiska

Life for a P-38 begins at the end–the end of the production line! If the Army says: "Change for Kiska"–the P-38 is flown to a Lockheed Modification Center where "winterizing" starts. Propane primers to make engines start quickly are added. So is insulation for tubing. Cockpit heaters are installed for the comfort of the pilots.

Change for Munda

If the Army says: "Change for Munda" or somewhere in the tropics, the P-38 undergoes other modifications. Different armament or special radio equipment may be needed.

But whatever it is, or wherever these Lockheed Lightnings go, proper modification assures proper performance.

Ready to Fight

Today, when a Lockheed P-38 arrives at a battle front, it is ready for a fight. *Tomorrow,* there will be need for *peacetime* modifications to fit your plane for service in desert heat or arctic cold. Wherever you fly, there will be Lockheed-trained service men to do the job. For tomorrow, as today, Lockheed will not only build planes, but *get* them ready to fly, and *keep* them ready to fly.

LOOK TO *Lockheed* FOR LEADERSHIP

LOCKHEED AIRCRAFT CORPORATION, BURBANK, CALIFORNIA

MACHINE-TOOL TIPS FROM THE TOP-NOTCHERS

"Hob life can be greatly increased by accurate, frequent sharpening"

says: R. A. HORNER, Sales Mgr., Machine & Small Tool Div. BARBER-COLMAN CO., Rockford, Illinois

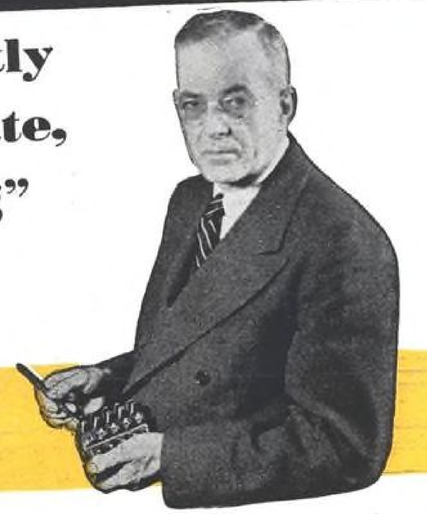

The development of the No. 3 Automatic Hob Sharpening Machine by Barber-Colman Company has proved a major contribution to the war effort; made it possible to increase tool life . . . speed up production.

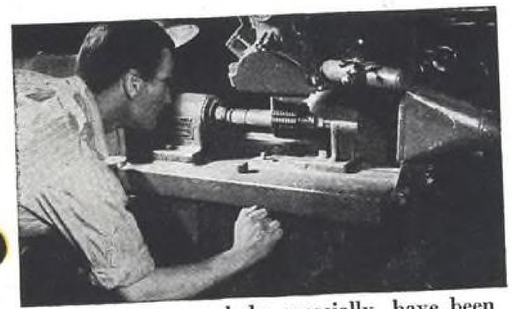

"CUTTING TOOLS, hobs especially, have been mighty hard to get these past months, and it has been the patriotic duty of every tool user to make his tools last as long as possible.

"One of the greatest influences on the length of hob life is the frequency and accuracy with which the hob is resharpened. The more frequently it is sharpened, the less stock must be removed, the longer its life. In addition, a hob is a precision-cutting tool, and must be sharpened to close tolerances; otherwise, it will produce inaccurate forms which are a waste of tool life and material.

"Mechanically controlled sharpening has proved to be the only satisfactory method for being sure of accuracy and equal stock removal. Evidence of this is the fact that all hob manufacturers use automatic, mechanically controlled sharpening-machines in producing hobs to original precision tolerances.

"And because of its accuracy this machine will keep hobs at their highest cutting efficiency. Its ease and rapidity of operation reduces to a minimum the expense of proper tool maintenance. Since the machine is fully automatic, it insures accurate results regardless of the personal skill of the operator."

* * *

The proper selection of a cutting oil is as important as the proper sharpening of a hob. That's why Shell Lubrication Engineers have developed a control technique that "tailor-makes" the oil to fit the machine, the application, and the tool. Ask the Shell man for the details.

To obtain maximum life and consistent accuracy in resharpening your hobs, follow this 6-Point Sharpening Program:

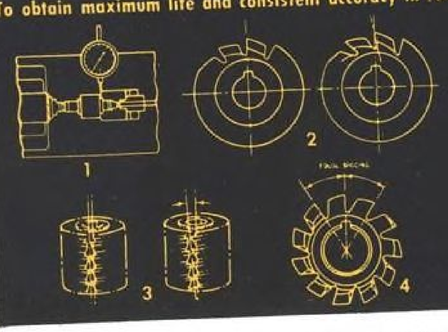

1. Be sure that the hob is truly and accurately mounted on the arbor in the machine. (Fig. 1)
2. Grind the faces of the hob teeth radial, or with correct rake as marked on the hob. (Fig. 2)
3. Accurate gashes, either straight or helical, must be maintained to insure correct form. (Fig. 3)
4. Hob teeth must be precisely indexed in sharpening, or uneven cutting action and wasted hob life will result. (Fig. 4)
5. Keep grinding wheel clean and free cutting.
6. Keep all hobs sharp, at no time allowing wear to exceed .005" to .010", depending on the type of hob.

SHELL CUTTING OILS for metal cutting and grinding

SHELL

HOBS

Can Brake Shoe's "Research Group" help with

YOUR *Punished Part* PROBLEM?

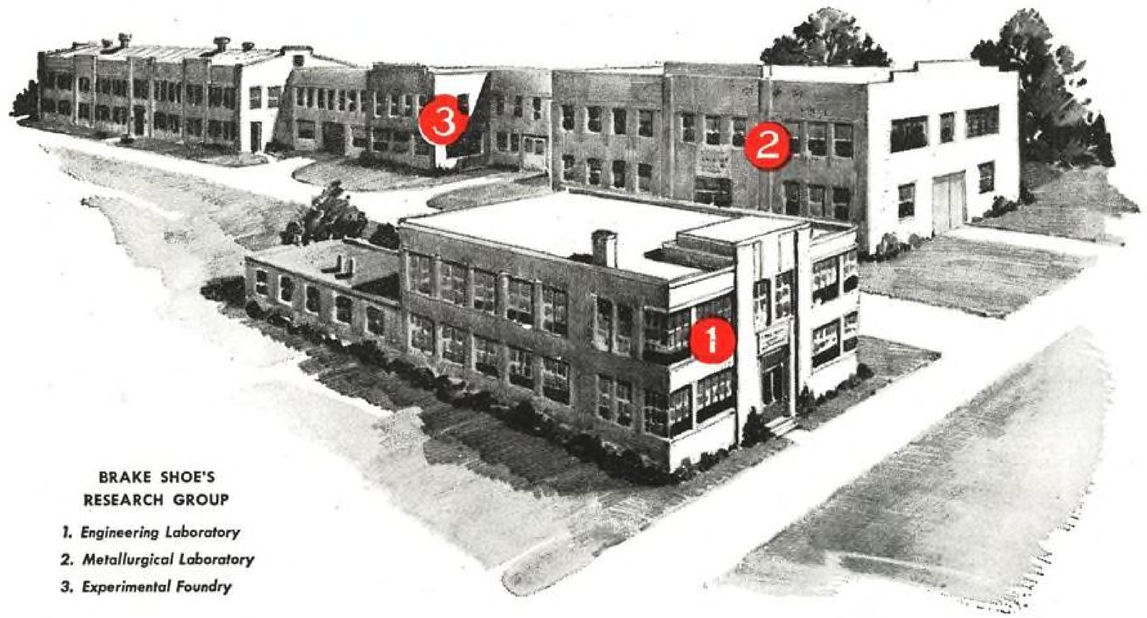

BRAKE SHOE'S
RESEARCH GROUP

1. *Engineering Laboratory*
2. *Metallurgical Laboratory*
3. *Experimental Foundry*

Every machine has at least one part that takes a special beating. Repeat sales often depend on the wear life of this "punished part."

One of the many activities of Brake Shoe's Research Group is to analyze all the kinds of wear that shorten the life of such parts—corrosion, heat, erosion, impact, abrasion — and to find practical ways to increase wear resistance.

The answer may lie in a new alloy. It may lie in different heat treatment. Or in an entirely different material. It may be a combination of factors.

Where success is achieved, it means for the customer a better product — and for Brake Shoe a new customer.

The resources of Brake Shoe's Research Group, recently enlarged by the addition of an Experimental Foundry, are available to manufacturers whose production calls for large runs of standardized parts.

Consider Brake Shoe As a Source for Postwar Parts in Volume

When it is time to solve your "punished part" problem, remember Brake Shoe may have a contribution to make. You are invited to write to R. B. Parker, American Brake Shoe Company, 230 Park Avenue, New York 17, New York.

AMERICAN **Brake Shoe** COMPANY

A parts source that may help you meet postwar competition

59 PLANTS SERVING INDUSTRY AND TRANSPORTATION

American Brakeblok Division	*Detroit, Mich.*
Ramapo Ajax Division	*New York City*
American Manganese Steel Division	*Chicago Heights, Ill.*
Brake Shoe and Castings Division	*New York City*
Kellogg Division	*Rochester, N. Y.*
American Forge Division	*Chicago, Ill.*
Southern Wheel Division	*New York City*
National Bearing Metals Corp.	*St. Louis, Mo.*
Electro-Alloys Company	*Elyria, Ohio*

From 200° Fahrenheit

HEINEMANN
AERO-MAGNETTE
Fully Magnetic
CIRCUIT
BREAKERS

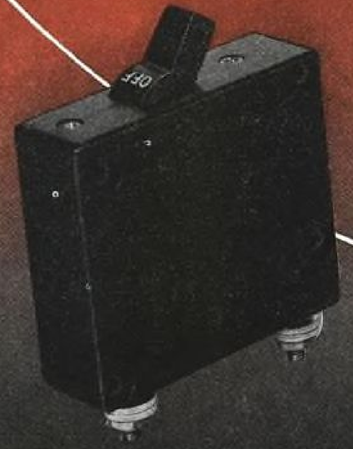

Upstairs where the temperature may drop to 60° below or on the ground where it may rise to 200° F. (near the engine nacelles), Heinemann Aero-Magnette Circuit Breakers operate at peak efficiency. Such sudden and extreme changes of ambient temperatures will not alter 1) the current carrying capacity, 2) instantaneous tripping at approximately 9 times rated capacity, nor 3) minimum trip point at approximately 1¼ times rated capacity. If you want complete information, send for bulletin giving time delay curve, mechanical details and engineering data.
HEINEMANN CIRCUIT BREAKER CO., TRENTON, N. J.

To Minus 60°

NEW

AVAILABLE NOW!

The new, complete, fully illustrated *1944 Weatherhead Aviation Catalog* is yours for the asking. Write on company letterhead simply giving your name and title—no charge, of course.

Every aviation engineer, designer, purchasing agent and production executive should have this handsomely bound, 150-page Aviation Catalog just off the press. Each of the scores of parts made by the four Weatherhead plants is fully described, all parts are illustrated with diagrammed drawings and dimensional charts.

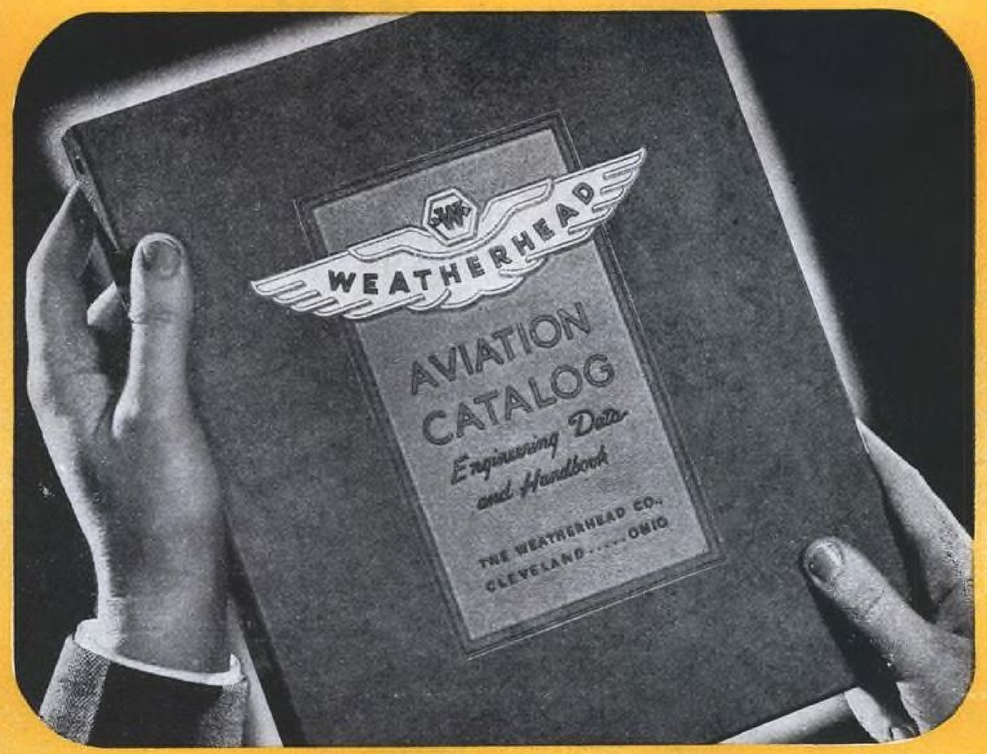

Save Time . . . Save Money . . . Save Effort . . . Write for this handy source book today!

SIX SECTIONS
for quick reference

1. AN FITTINGS
2. AC 811 FITTINGS
3. FLEXIBLE HOSE
4. HOSE ASSEMBLIES
5. VALVES AND CYLINDERS
6. COMPLETE ENGINEERING DATA

Look Ahead With

Weatherhead

THE WEATHERHEAD COMPANY, CLEVELAND, OHIO

One of the Oldest and Largest Manufacturers of Vital Parts for the Aviation Industry

THE ENEMY HAS NOTHING TO MATCH THE *Lightning*

The Lockheed Lightning—striking in the Mediterranean, over Europe and at many points in the Pacific—has won even the enemy's highest praise. With a speed well over 400 miles an hour, a ceiling above 40,000 feet, the Lightning is still among the hardest-hitting and best-protected fighters, and is the greatest weight carrier of them all. It has proved remarkably versatile as a high altitude fighter, a low-level and dive bomber and a deadly strafer. Deliveries to many fronts have been attained by increasing its range until it can be ferried anywhere. And it can take punishment like an American heavy bomber. In the Aleutians, a pilot flew his Lightning back to the base with one engine completely shot away.

Part of the Lightning's weight is armor for safeguarding the pilot and vital parts; much of it is sturdy airframe construction, with maximum ease of replacement.

To the staunch airframes of the Lightning and many other outstanding American planes, strength and the ability to take abusive punishment is contributed by the tough, stress resistant drop forgings which Kropp Forge Aviation is producing in ever increasing volume. We produce airframe drop forgings exclusively for most major airframe builders—may we serve you?

ARMY E NAVY

Member of the A.C.C.A.

Kropp Forge Aviation Co.

5301 W. ROOSEVELT ROAD CHICAGO

Engineering Representatives in Principal Cities

Then he said to himself

"THIS WAR HOLDS UNPREDICTABLE DEVELOPMENTS"

FOR once Premier Mussolini was right when, just a year ago, he warned the Fascist Directorate that "This war still holds unpredictable developments, which will not all be on the political plane."

But there was enough on the "political plane" to slam his chin back in his collar, and if one wishes to read a moral into his statement, it could well be:

You always lead with your chin when you team up with the wrong working partner.

It is then you get unpredictable results of a DESTRUCTIVE nature.

"Unpredictable Developments" he says

Look, Benito (wherever you're in hiding), how men achieve predictable developments of a CONSTRUCTIVE nature when through recourse to Lincoln, they team up with a CONSTRUCTIVE partner. For example:

LINCOLN'S NEW AIRCRAFT WELDING COMBINATION

PREDICTABLE DEVELOPMENTS: (1) The "Shield-Arc Jr." Aircraft Welder with famous Dual Continuous Control providing the right TYPE of arc and the right AMPERAGE for every job. (2) The convenient, light-weight, foot-operated "Lincontrol". (3) "Planeweld" Electrode for chrome-moly steels. (4) "Fleetweld" Electrode for mild steel.

CONSTRUCTIVE RESULTS: (1) "Tailor-made" welding arc to suit the job. (2) Accurate control of arc intensity without interruption to welding; less operator fatigue. (3) Best possible welds at highest welding speed and lowest cost . . . on every job . . . all the time.

Write for details on this New Lincoln Aircraft Welding Combination.

THE LINCOLN ELECTRIC COMPANY • CLEVELAND 1, OHIO

America's greatest natural **recourse**

ARC WELDING

Approved by Associated Factory Mutual Laboratories

MODERN WEAPON OF DEFENSE AGAINST
VARIABLE INDUSTRIAL FIRES

FAST • SAFE • RELIABLE

One of industry's major safety problems has been the urgent need for a standard fire extinguisher—equally effective on both flammable liquids and fires of electrical origin.

Today, the new, improved "ALL-OUT" Fire Extinguisher solves that problem in full. Using as its extinguishing agent, "ALL-OUT" Dry Chemical, the extinguisher ejects a stream of powder that instantly forms a dense, heat-resisting cloud over a flaming area up to a distance of 18 feet. The fire-smothering action of the cloud, which is clean and harmless to men and machinery, displaces oxygen and extinguishes both burning liquids and electrical fires in a matter of seconds. The insulating qualities of the cloud create a heat-deflecting screen between the operator and flame, permitting him to extinguish the fire at close range without danger or heat discomfort.

Combining light weight, rugged construction and new fire-engineering principles, the "ALL-OUT" Fire Extinguisher fully meets the exacting requirements of the Associated Factory Mutual Laboratories . . . and gives industry a reliable weapon of defense to effectively combat both electrical and burning liquid fires.

To assist you in safeguarding your plant and equipment against variable industrial fires, write today for complete information. If you have a particular fire problem, ask an "ALL-OUT" representative to call. He will make recommendations without any obligation to you.

CHECK THESE ADVANTAGES OF THE "ALL-OUT" FIRE EXTINGUISHER

✔ Exterior mounting of the carbon dioxide cylinder permits *quick, on-the-spot recharging* without pressure pump or costly recharging equipment.

✔ Light-weight construction—approximately 37 lbs. fully charged—promotes *easier handling* and *faster application* on fire by either men or women workers.

✔ Method of introducing carbon dioxide pressure produces a *heavier* and *denser* extinguishing cloud.

✔ Larger powder recharging opening allows *more rapid refilling* without use of special funnels or refilling equipment.

✔ Dry Chemical is unaffected by weather or wind conditions, and *will not scratch, stain nor mar* metal surfaces or the most delicate mechanized parts of motors or machinery.

✔ Special chemical included in "ALL-OUT" Dry Chemical forms an insulating film on hot inner surfaces of metal containers and helps *guard against re-flash.*

✔ Ejected through a fan-shaped nozzle the stream of chemical *separates the flame* from the burning material and speeds the extinguishing action.

Send For This Detailed "ALL-OUT" Folder

NATIONAL POWDER EXTINGUISHER CORPORATION

50 ROCKEFELLER PLAZA, NEW YORK 20, NEW YORK

Continental Red Seal Engines

ARMY E NAVY

Awarded to the Detroit and Muskegon Plants of Continental Motors for High Achievement

POWER TO WIN

The skill, initiative, fearlessness and fighting qualities of our air force are beyond description and America owes them lasting gratitude.

Many of these air-men learned to fly in trainers powered by Continental Red Seal Engines.

We are proud that they could, during their training, depend on the steady surge of Red Seal Power as we, today, can depend on their world-famous fighting ability.

Your dollars are power, too, — Buy War Bonds and Keep Them

Continental Motors Corporation
Aircraft Engine Division
MUSKEGON, MICHIGAN

SOUTH BEND LATHES

BUY WAR BONDS

War production demands uniform accuracy. Loss of time or the waste of scarce strategic materials because of variations in machining cannot be tolerated. There is no place in our war production plan for equipment that cannot be relied upon to maintain required tolerances.

Sound design and careful workmanship give South Bend Lathes the dependable precision that assures uniform accuracy. Built by skilled craftsmen who take pride in their work, they are capable of maintaining split-thousandth tolerances on all work within their capacity. Their unvarying performance speeds production on the most exacting machine operations and assures perfect interchangeability of parts and units.

There is a South Bend Lathe for most war production requirements. The Engine Lathes are made in 9", 10", 13", 14½", and 16" swings, with bed lengths from 3' to 12'. The Toolroom Lathes are made in 10", 13", 14½", and 16" swings, with bed lengths from 3' to 8'. The Turret Lathes are made in 9" and 10" swings, with 3½' bed lengths. These lathes are described in Catalog 100C which will be sent upon request.

SOUTH BEND LATHE WORKS

SOUTH BEND 22, INDIANA • LATHE BUILDERS FOR 37 YEARS

This is a game for experts

Commercial Air Transportation is a "game" requiring many experts—from the aircraft designer to the pilot who actually does the flying. But even these experts would have trouble without dependable radio communications, instrument landing and efficient electronic control centers. Eimac is the recognized "expert" in this phase of the commercial air transportation "game."

One reason may be that Eimac and the airlines grew up together—laying the foundations for this great new public service. But the most important reasons are that Eimac tubes possess vastly superior performance capabilities and great stamina. These are the reasons that have made Eimac tubes first choice of leading Electronic Engineers throughout the world —first in new developments in the field of Electronics.

Follow the leaders to Eimac REG. U. S. PAT. OFF. TUBES

EITEL-McCULLOUGH, INC.

842 San Mateo Avenue, San Bruno, California

Plants located at: San Bruno, Calif. and Salt Lake City, Utah

Export Agents: FRAZAR & HANSEN, 301 Clay Street, San Francisco, California, U. S. A.

EIMAC 2000T

Get your copy of **ELECTRONIC TELESIS**

Sixty-four pages crammed with instructive illustrations and plain, simple language descriptive of the fundamentals of Electronics and its important applications. Yours for the asking without charge or obligation.

U. S. Patent
Re 18144

WALDES TRUARC RETAINING RING

Waldes Truarc presents a significant advance in retaining rings.

It spreads or contracts without distortion; always retaining its perfectly fitting circular contour.

For thrust-load fixing, shaft and housing applications, Waldes Truarc provides distinct advantages over nuts and bolts or wedges and washers. It reduces dimension and weight, saves material, cuts manufacturing time . . . simplifies assembly and dis-assembly.

On request, we will gladly furnish samples and full data for your tests.

WALDES KOH-I-NOOR·INC · LONG ISLAND CITY, N.Y.

Sole Manufacturers in U. S. A.

CANADIAN REPRESENTATIVES: Prenco Progressive & Engineering Co., Ltd., 72-77 Stafford St., Toronto

This FULL-FLOATING WINDOW MOUNTING *of Aero-Quality* LUMARITH*

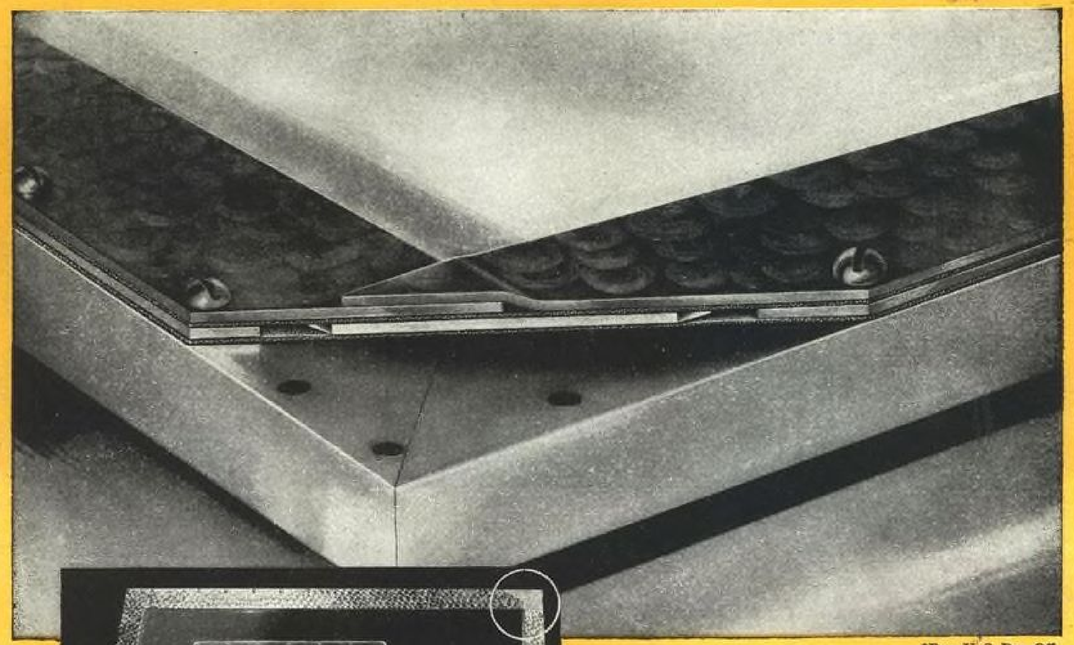

*Reg. U. S. Pat. Off.

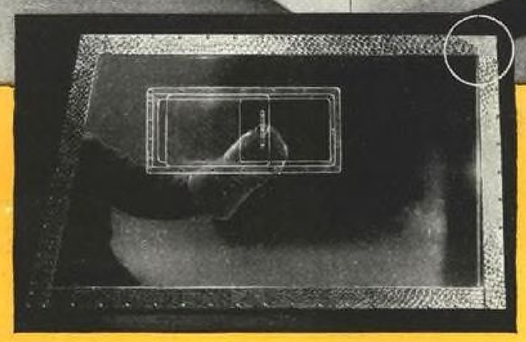



Is Considered Ideal by Many Engineers

The full-floating type mounting, here illustrated, has many advantages to recommend its use for cellulose acetate plastic panel mountings. It eliminates the drilling of bolt holes, and the attendant difficulties of locating them properly. Replacements are easier to make.

Depth of channel is determined by taking into consideration the maximum possible expansion and contraction of the Lumarith panel, and the channel support depth required under all atmospheric conditions. Spacer thickness, which is important, is gauged so as to insure a firm grip of the panel and yet permit expansion and contraction movement.

The Technical Service Department of Celanese is ready at all times to give assistance to manufacturers on the subject of plastics—either molded or sheets, rods, tubes, films or foils. You'll want, of course, a copy of the second edition of the Lumarith Mounting Book. Let us know where to send it. Celanese Celluloid Corporation, *The First Name in Plastics*, a division of Celanese Corporation of America, 180 Madison Avenue, New York City 16.

OWI Photo by Palmer in an Allegheny Ludlum plant

To this Flywheel, Many a Bomber

OWES ITS OWN ABILITY TO FLY

HAND BOOK OF SPECIAL STEELS

Newly revised and reprinted—a comprehensive book on the properties, uses, and best methods of handling, treatment, etc. of tool, stainless and other alloy steels. Plenty of tables to facilitate quick reference and selection. 136 pages, pocket-sized, latest data.

SEND FOR YOUR COPY

Address Dept. A-23

WITHOUT special alloy steels, no modern bomber would fly . . . in fact, there are more of these materials in the big planes than any other single ingredient, a fact not so commonly understood.

Many of these special steels—electrical, corrosion and heat-resisting, valve and nitriding—first passed over the big breakdown mills in Allegheny Ludlum plants. Even more particularly, many of them were developments of our own research, and all of them are raw materials of the greatest portent for the future.

Special steels have eloquently demonstrated their ability to do for a product—perhaps *your* product—what ordinary materials cannot do. Let our Technical Staff help you to fit these tailor-made steels to your needs.

AL — STEEL FOR THE NATION'S WELFARE

Allegheny Ludlum STEEL CORPORATION

BRACKENRIDGE, PENNSYLVANIA

Allegheny Stainless also handled by all Joseph T. Ryerson & Son, Inc. warehouses

W&D—A-9334

Induwrap*

GIVES ARTIFICIAL RESPIRATION TO STEEL

..kills corrosion

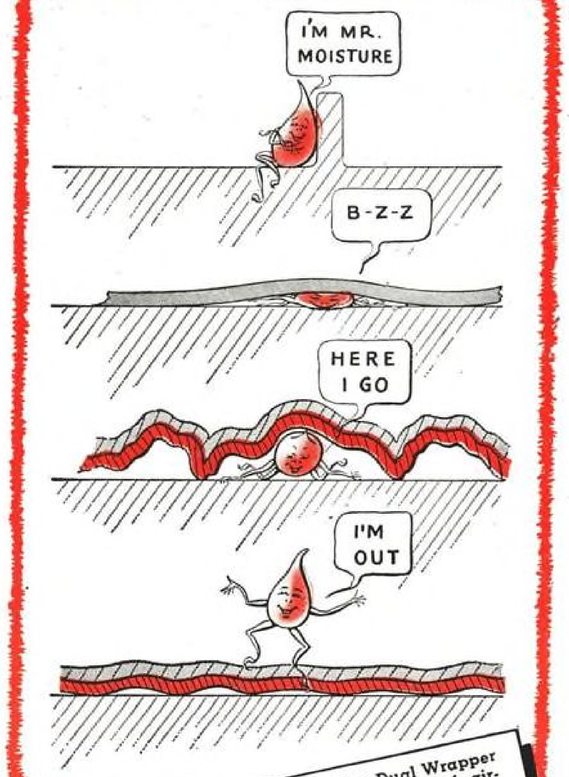

INDUWRAP — This Inhibitive Dual Wrapper has revolutionized the packaging of aircraft engine and other highly finished metal parts shipped to points throughout the world.

WRITE TODAY for sample and free descriptive folder. "The Touch of Death to Steel" — Folder (AV). Anticipate your peacetime needs when ANGIER INDUWRAP will be generally available to industry.

Who would have thought it — highly finished steel needing to breathe!

But it does. At any rate, that's the theory of Angier Protective Engineers and other competent packing authorities. Experiments have found a way to let packaged steel breathe, and many tests have demonstrated that breathing, as permitted by INDUWRAP, is an effective first-aid against the contamination of steel by corrosion.

Let's see how Mr. Moisture makes it work:

Under a tight-fitting flat wrap, Mr. Moisture is squashed against the steel surface — trapped there on a spot where the protective oil film may be broken. Corrosion starts its deadly work.

But note how different it is when the wrapper is creped — when it S-T-R-E-T-C-H-E-S. In the little air channels between points where it touches the steel, Mr. Moisture finds elbow room to wiggle out — evaporate from his prison, leaving the broken "spot" in the oil film protected by the A-25 infusing compound in the INDUWRAP wrapper.

"What is the source of this moisture?" you may ask. Well, it may fight its way out of pores in the metal, or come from solvents in the oil compound with which the metal is slushed. It may make its unwelcome appearance from many places, and it does. INDUWRAP — creped and with its corrosion inhibitive metal-contacting surface — is safe insurance against this trouble-maker.

Then there are other decided advantages in using a creped, resilient wrapper. It is flexible and conforms neatly to the protruding parts of odd-shaped articles, without puncturing or tearing. And it helps to cushion the shocks of travel.

*REG. U. S. PAT. OFF.

ANGIER CORPORATION

CORROSION PREVENTIVE AND WATERPROOF PAPERS

FRAMINGHAM, MASSACHUSETTS

Angier

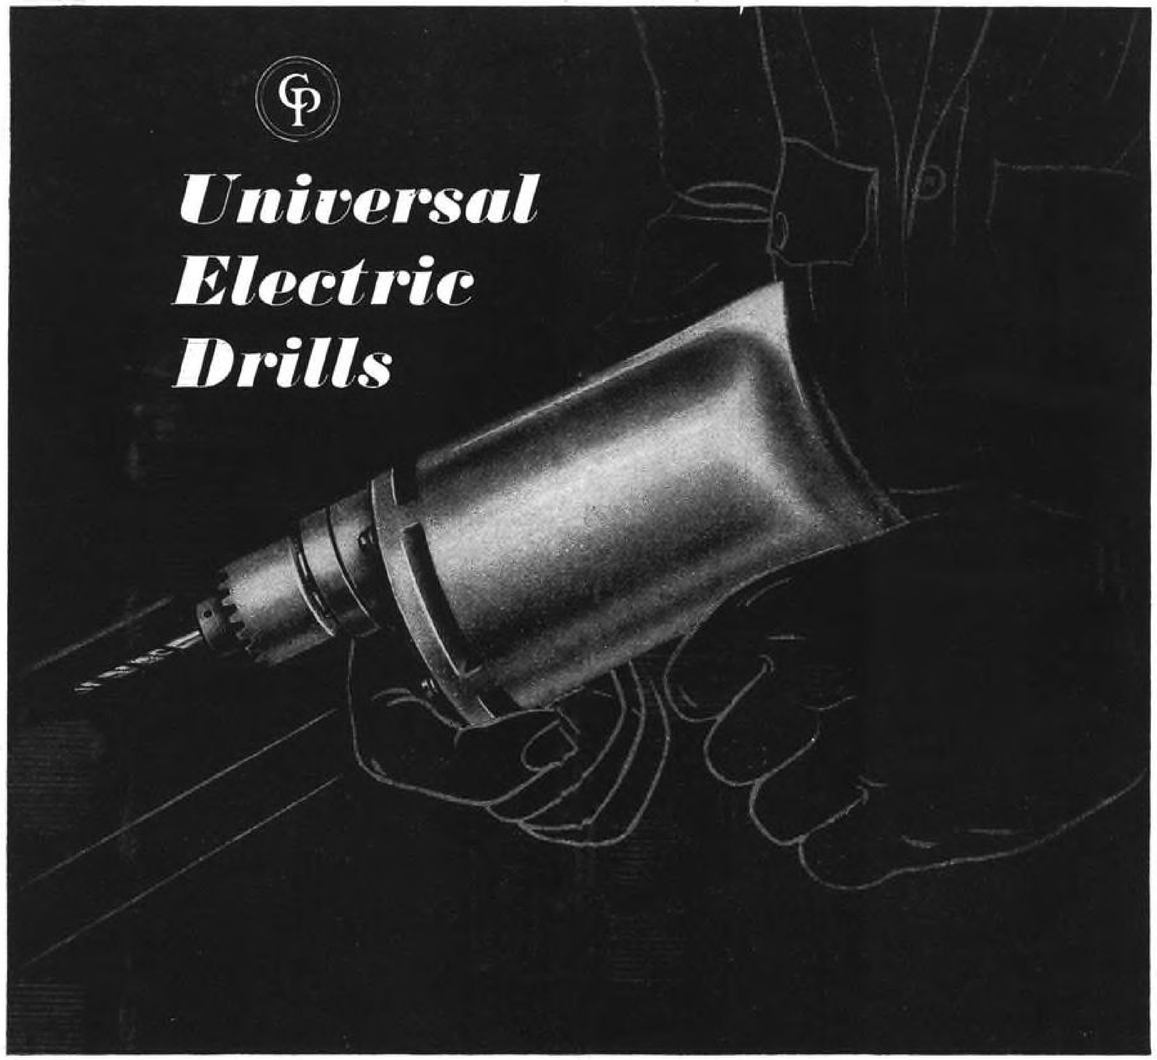

Designed for the Production Line

CP Universal Electric Tools are built to "take it" – with powerful, high torque trouble-free motors. "Straight-Line Airflow" ventilation makes the motors particularly cool running. Heat treated helical gears and ball bearings throughout make CP Universal Electric Tools silent as well as enduring. Every feature of their design is calculated to meet long continuous service – *truly production line tools.*

The drill illustrated is the CP No. 806 "Midget" –ideal for close quarter drilling jobs up to ¼".

In addition to Drills, CP Universal Electric Tools include – a long line of Reamers, Tappers, Screw Drivers, Nut Runners, Grinders, Sanders, Buffers, Flue Rollers, Hammer Drills, Scalers, Files. For complete information, write for Catalog No. 899.

★★★★★★★★★
PNEUMATIC TOOLS
ELECTRIC TOOLS
(Hicycle...Universal)
ROCK DRILLS

CHICAGO PNEUMATIC
TOOL COMPANY
General Offices: 8 East 44th Street, New York 17, N. Y.

★★★★★★★★★
AIR COMPRESSORS
VACUUM PUMPS
DIESEL ENGINES
AVIATION ACCESSORIES

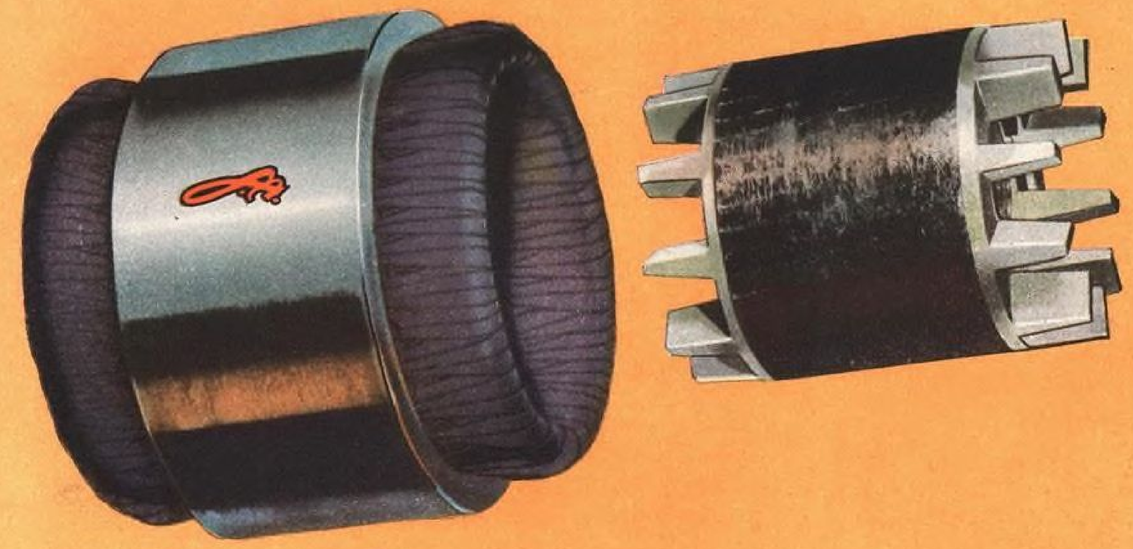

There is a size and type **LOUIS ALLIS** *electric motor for every industrial requirement.*

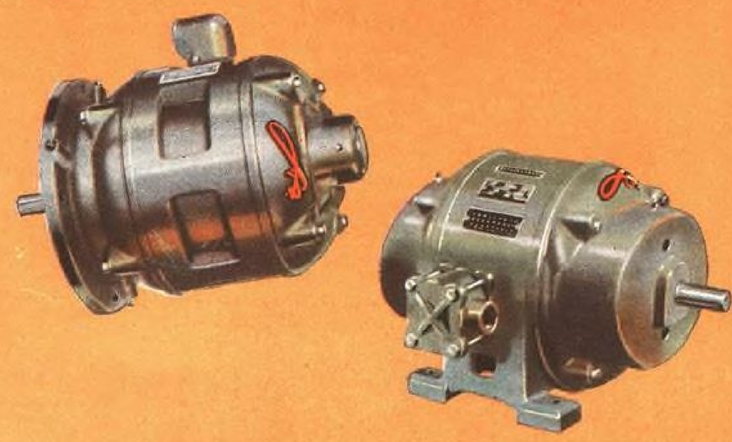

THE LOUIS ALLIS CO., MILWAUKEE 7, WIS.

Our Obligation To Industry

As a manufacturer of electric motors, we feel that we have a unique obligation to industry, for it is industry that creates our market for us. Our motors by themselves can't turn metal, process materials, nor drill oil wells, but properly applied to your equipment they can do all these things and many more.

For years it has been our privilege to sit in with many of our friends on their initial discussions for designing devices to increase production. We have truly acted as their confidential electrical consultants.

In such circumstances, our obligation is clear. We must do more than design and apply motors for maximum results at minimum cost. Above all, we must and do treat with utmost confidence the information gained through being in on the original development. At all times we must and do remember that companies who have sought our advice are developing business for us. The best interests of such customer friends are our paramount responsibility.

You can place your electric motor development problems with our engineers in complete confidence —your inquiry is invited.

THE LOUIS ALLIS CO., MILWAUKEE 7, WIS.

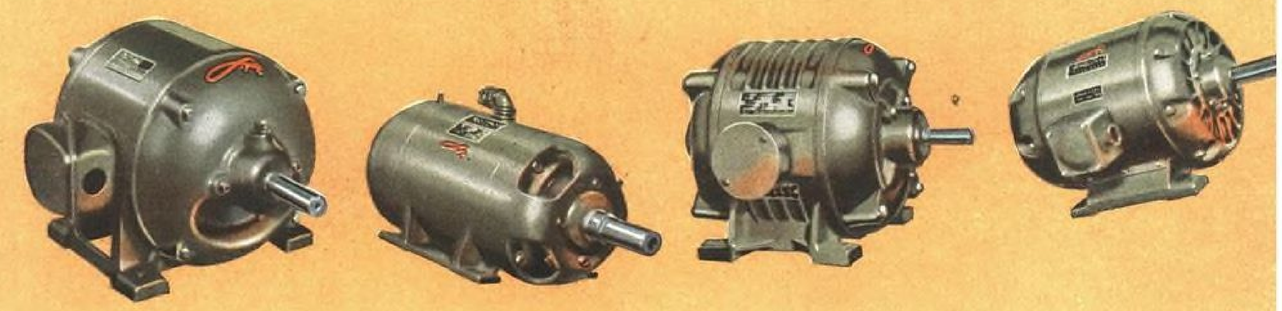

More Speed for every hand tool operation . . . Snap-ons deliver it . . . with less effort, greater accuracy and utmost safety! In hundreds of plants engaged in critical war production, Snap-ons are standard tool equipment . . . *the choice of better mechanics* throughout industry. 3,000 modern Snap-on tools provide a wide selection for production, assembly and maintenance operation. Snap-on offers direct-to-user tool service through 37 factory branches in key production centers. Write for catalog!

SNAP-ON TOOLS CORPORATION • 8020-E 28th Avenue • Kenosha, Wisconsin

MORE HEAT

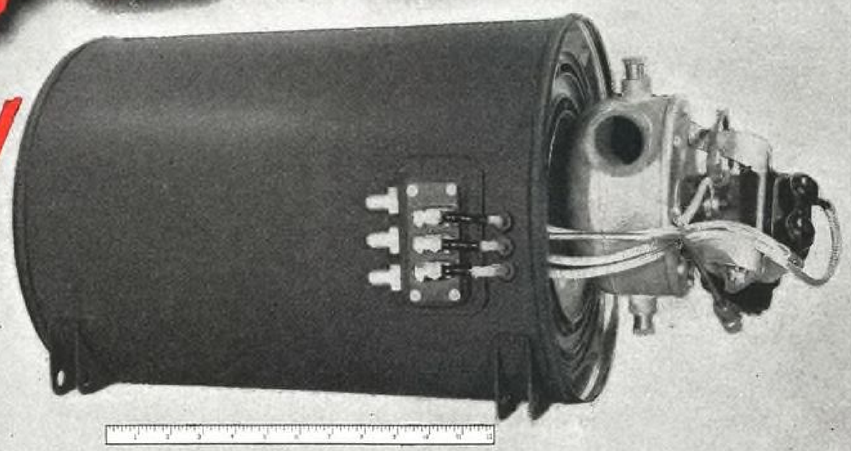

NEW!

New model 911 South Wind for ram-air operation. Only a little larger than an ordinary wastebasket and weighing but 21 pounds, this South Wind delivers up to 250,000 Btu/hr., depending on operating air supply.

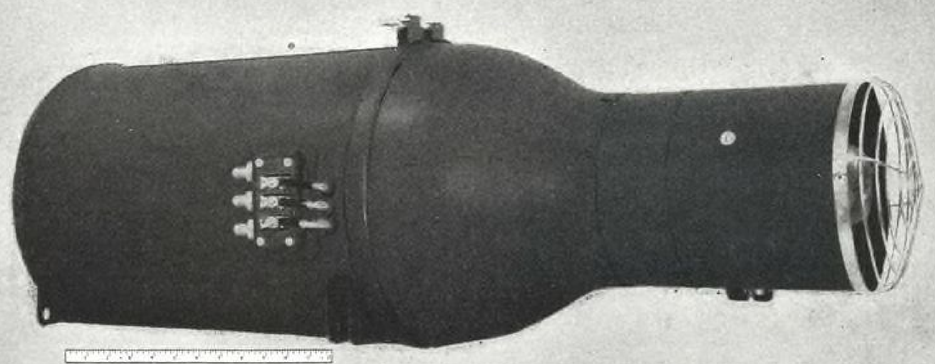

Auxiliary blower fan can be used instead of ram-air, making heater suitable for wide range of uses. Blower shown attached to heater here weighs only 9 pounds and gives heat output of 100,000 Btu/hr.

PER POUND AND CUBIC INCH THAN EVER ATTAINED BEFORE

...And it's a Dependable South Wind!

THIS NEW South Wind aircraft heater model 911—specially developed for airplane needs—weighs only 21 pounds, complete with electric fuel shut-off and high-low valves. And it delivers *up to 250,000 Btu/hr.*, dependent on installation conditions! *Not engine connected!*

In exhaustive tests, this heater has started and operated satisfactorily in temperatures as low as −61° F., and at barometric pressures equivalent to 30,000 ft. altitude.

The remarkable ratio of output to weight and size is the result of two Stewart-Warner engineering developments . . . the "accelerating flow" spiral design with its increased compactness and greater heat-transfer efficiency . . . and a highly developed, high-efficiency burner capable of starting and operating over a wide range of fuel-air ratios, air rates and inlet air temperatures.

In anti-icing uses, particularly, this burner tolerance is important, since in most installations it eliminates need for a combustion air regulator valve which would be likely to ice up and render the heater inoperative.

As shown in the accompanying chart, heat output normally varies with pressure of the ram-air supply. Lightweight controls are available which provide constant outlet air temperature over a wide range of air flow rates.

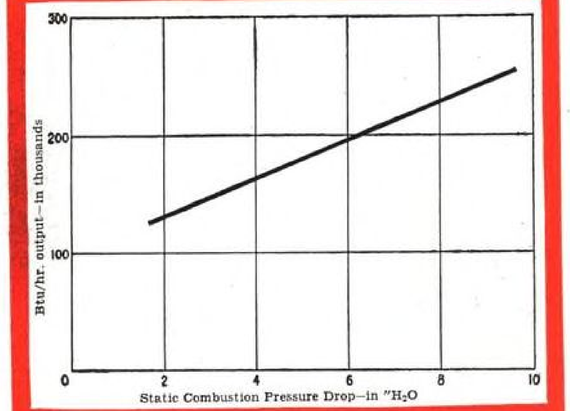

This chart showing relation of heat output to combustion air pressure drop shows not only the output range available but also the tolerance of the heater to a wide range of operating conditions.

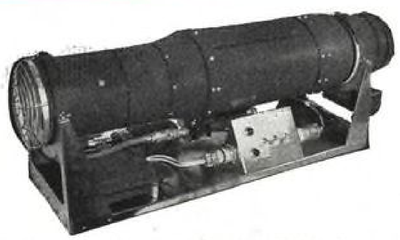

ANOTHER WINNER! South Wind model 906—for ram-air or blower fan operation—with output of 50,000 Btu/hr. Shown here in special demonstration mount, with accessory blower on left end of heater, short duct section at right, and fuel tank and other demonstrating equipment below.

Another Product of STEWART WARNER

South Wind Heaters

REG. U. S. PAT. OFF.

ARMY E NAVY

HEATER DIVISION, STEWART-WARNER CORPORATION, CHICAGO 14, ILLINOIS

West Coast Office: Stewart-Warner Aircraft Heater Engineering and Service, 1273 Westwood Blvd., West Los Angeles, California

HELPING AVIATION MESH THE HEMISPHERES

With the world's remotest village but 60 hours from your local airport, the hemispheres today are in closer touch than were many States before the airplane was born. And Wolf's Head is proud to have had prominent part in helping aviation thus conquer space and time.

Ever since World War I, leading airplane engine makers have consistently used Wolf's Head Oil for their critical test and breaking-in runs. During the past 15 years, Pan American World Airways has flown more than a BILLION passenger-miles on Wolf's Head. And Wolf's Head has been shipped around the world for use in United Nations' planes.

As aviation continues to advance, Wolf's Head will match the designers' strides with this 100% Pennsylvania oil—the "Finest of the Fine." Wolf's Head Oil Refining Company, Inc., Oil City, Pa.—New York 10, N. Y.

WOLF'S HEAD

100% PENNSYLVANIA
AVIATION OIL

P.G.C.O.A. Permit No. 6

BLUEPRINT FOR YOUR WRENCH FUTURE...

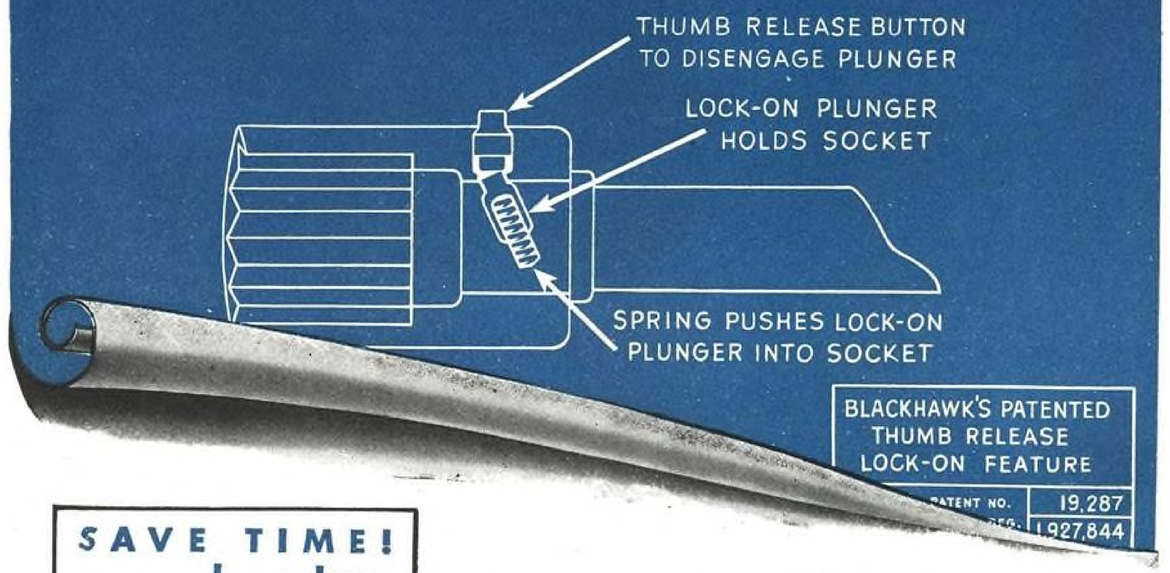

SAVE TIME!

Eliminate need for groping into the job for sockets and attachments that slip off the handle. "Lock-On" plunger springs into hole in socket wall — prevents slip-off!

PLAY SAFE!

Loose sockets can cause damage! That's why aviation men recognize importance of "Lock-On". Socket cannot stick to nut when you pull away from work.

(PHOTO—COURTESY, NORTH AMERICAN AVIATION, INC.)

SAVE TEMPER!

It's great not having to cuss combinations that slip apart accidentally. But when you want 'em apart—simply press "Thumb-Release" button!

Enjoy Socket Wrenches with Thumb-Release LOCK-ON

. . . at no extra cost!

Get the most for your wrench money! Blackhawk Socket Wrenches *give you the most*—and it only takes a minute to see why. There's patented "Lock-On", for example . . . it keeps sockets from falling off into oil pans, hot machinery and cramped quarters. Also "Gripline" handle design . . . wipes clean and free from dirt — no ugly, uncomfortable cross-knurls. Blackhawk gives you the steel, the clean broaching, the balance, the extra utility and the lightweight — all of which make you a better workman and "King of the Shop"!

Buy Blackhawk Wrenches from your jobber.

A Product of **BLACKHAWK MFG. COMPANY, Dept.W2154, Milwaukee 1, Wis.**

BLACKHAWK

ONLY Blackhawk Gives You "Lock-On" in 3/8"—7/16"—1/2"—3/4" and 1" Square Drives

BLACKHAWK MFG. CO.
Dept. W554, Milwaukee 1, Wisconsin

Please rush Blackhawk Wartime Wrench Booklets.

Name_____

Address_____

City_____ State_____

Gasoline Injection

MORE POWER FOR THE WORLD OF TODAY AND TOMORROW

In 1944 gasoline engines enter a new phase of progress as builders start to use American Bosch Gasoline Injection. You will hear of it again and again as we progress through Victory to the world of tomorrow.

WHAT IT IS . . . Briefly—an entirely new and different way of supplying fuel to the cylinders of a gasoline engine.

Important? Yes! Leading engineers knew that it was but a matter of time before a better fuel distribution system would become a practical reality — a system that would increase efficiency and bring extra safety.

There was a clue! Diesel engines, in their specialized way, offered high efficiency, responsiveness, safety. Would the Diesel method of injecting fuel directly into the cylinders be practicable for gasoline engines?

American Bosch knew gasoline engines from years of experience in building ignition equipment. American Bosch knew Diesels. They had engineered and built Fuel Injection Equipment for the American Diesel industry from the inception of high-speed engines.

So American Bosch engineers co-ordinated their own fund of gasoline and Diesel engine knowledge with that of forward-looking engine builders. Test installations followed. They proved a success. Gasoline Injection is today a reality.

WHAT IT DOES . . . *Greater, Smoother Power.* Now, the fuel is delivered uniformly to every cylinder. The result—all cylinders "pull" together in perfect harmony. And because the fuel is vaporized mechanically, all fuels, even lower grades, burn more efficiently, deliver a greater percentage of their potential power in the form of useful energy.

Greater Responsiveness. The engine responds without time lag, accelerates smoothly and performs more surely under any and all conditions.

Safety from the fire hazard of an explosive mixture in the induction system. Backfires become harmless — because all combustible mixtures are confined within the engine cylinders.

It's here — *Gasoline Injection.* Its benefits will be yours — for convenience, economy and pleasure — after Victory.

☆ ☆ ☆

AMERICAN BOSCH CORPORATION
Springfield, Massachusetts

AMERICAN BOSCH

PIONEER BUILDERS OF GASOLINE INJECTION IN AMERICA

LOST...and found

For many an Air Transport Command Flyer — the few moments before "ditching" may very well be the most precious moments in the lives of the crew. For those are the moments in which "Sparks" can radio his position to a rescue ship.

• Ferrying airplanes, as well as fighting them, has been made less hazardous by this network of radio intercommunication that runs from plane to plane, from plane to base — and so virtually around the world.

• But what, besides radio, makes aircraft radio intercommunication possible? The *shielding of the ignition system* to prevent interference by high tension ignition currents.

• The role of the Titeflex ignition harness in this work is universally known. It is perhaps not quite as universally known that Titeflex Radio Shielded Ignition Harnesses are standard equipment on the majority of American war planes. This may very well be attributed to Titeflex rigid standards of design, manufacture, and inspection. But for Titeflex it is merely an inspiration to more and more research.

• When the "super-planes" will write the final chapters in the war and give way to the commercial planes that will write the first chapters in the peace, Titeflex hopes to play its part.

• If you have any engineering problems involving either, you are invited to consult the Titeflex research staff now.

TITEFLEX, INC.
510 Frelinghuysen Avenue,
Newark 5, New Jersey.

Courtesy Of
BOEING AIRCRAFT COMPANY

Long before Pearl Harbor . . . FEDERAL control bearings were approved and adopted by aeronautical engineers and manufacturers.

Today, these fine ball bearings . . . famous for QUALITY . . . serve the air forces of the United States in every theatre of the war.

Federal aircraft BEARINGS

THE FEDERAL BEARINGS CO., INC.
Makers of Fine Ball Bearings
POUGHKEEPSIE, N. Y.
REPRESENTATIVES LOCATED AT
Detroit: 2640 Book Tower • Cleveland: 402 Swetland Building
Chicago: 902 S. Wabash Ave. • Los Angeles: 5410 Wilshire Blvd.

TRADE MARK

NOW THOMPSON QUALITY IN ALL N.A.S. BOLTS!

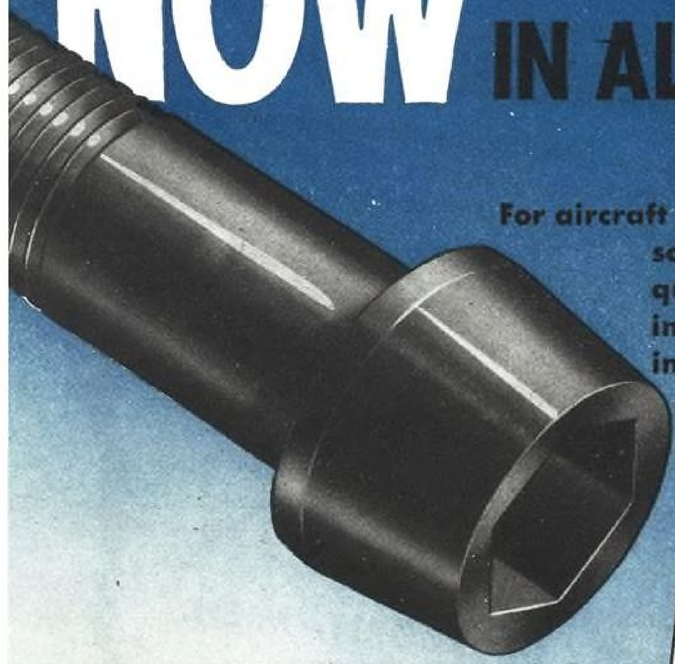

For aircraft manufacturers requiring them, Thompson is now able to turn its facilities to the quantity production of internal wrenching head National Aircraft Standard Bolts, in a complete range of sizes and types.

THE same exclusive Thompson methods used in production of ultra-high quality, more expensive special bolts will be used in manufacturing the N.A.S. types. These methods are producing precision, high-strength bolts that are unmatched by *anything similar* in the field . . . that are used for vital jobs on aircraft where *no other bolt* can meet the stress demands.

These Thompson Methods of manufacture are included in all N.A.S. bolts produced

HOT FORGING—Thompson Bolts are hot-gathered in special electrical upsetting machines and forged to shape at red heat to produce the desired grain flow in the metal that increases strength and uniformity.

CONTROLLED HEAT TREAT—All Bolts are individually heat treated to produce a tensile strength ranging from 160,000 to 180,000 p.s.i.

GROUND SHANK—To produce a smooth gripping surface, free of tool marks and stress concentration points—and to remove decarburization—all bolts are ground to correct diameters.

GROUND THREADS—Thompson Bolts have ground threads—not rolled or cut—to insure a smooth, precision thread finish and to produce a perfect radius for maximum strength.

GROUND UNDER HEAD—Bolts are ground on the radius and under the head to insure 100% bearing surface and prevent stress concentration at any one point.

100% INSPECTION—*Every bolt*—not just a few from each run—is given an exhaustive series of inspections and checks to guarantee perfection in every bolt that leaves the plant.

These—and many other important steps in manufacture—are the *plus values* that go into all Thompson N.A.S. Bolts to insure the finest products in their class. More details on Thompson methods are yours for the asking.

With years of experience in producing bolts to the most exacting standards ever established, and with exclusive and better manufacturing methods now available, Thompson is ready to meet your N.A.S. bolt requirements. Write—today—outlining your particular bolt needs. Thompson Products, Inc., WEST COAST PLANT, Bell, Calif.

ARMY-NAVY E

Thompson Products, Inc.

WEST COAST PLANT • BELL, CALIFORNIA

WANTED: Airport Maintenance Jobs

Only 46″ high, and with a 9′8″ turning radius, the Ford-Ferguson MOTO-TUG has what a general utility tractor should have for airport work. It can slide under wings and tail assemblies of most ships and get around easily in over-crowded hangars.

The single rear wheel model has a drawbar pull of 2,500 pounds and its dual wheel brother 4,000 pounds. The dual wheel model can handle a heavy bomber, single-handed, on the runway.

Any piece of equipment that rubs elbows with planes worth thousands of dollars should have a full quota of safety features. For instance, a spark arrester on the exhaust eliminates a possible source of fire. Another example—the starter will not operate when the tractor is in gear. The chances of crashing into personnel or equipment are reduced.

A limited number of MOTO-TUGS are available for immediate shipment. Phone, wire or write for complete specifications.

HARRY FERGUSON INC., DEARBORN, MICH.

Ford MOTO-TUG FERGUSON

Ford Tractor FERGUSON SYSTEM

Hauls Light Planes...Does Many other kinds of Maintenance Jobs

The Ford-Ferguson Tractor hauls light planes to relieve heavy-duty units during traffic peaks. This tractor with attachments does a variety of airport maintenance jobs. Write for further particulars.

"Let's Drop Down at Middletown For Gas and A Bite of Lunch"

THAT'S Mr. Private Citizen in the driver's seat of his 194X family airplane. He's off for the weekend with the wife. There are still 300 miles to go and the gas gauge says "half full." Mr. Private Citizen's stomach says "empty."

So, they drop down at Middletown for gas and a bite of lunch. As casual and commonplace as that!

Yes, driving a post-war family airplane will be as easy and carefree as driving a car. And just as in their car, a panel of Stewart-Warner instruments, simple and accurate, will tell them all they need to know to guide them on their way.

Today, the post-war family plane is on active non-combat duty. Stewart-Warner makes instruments for such planes. These are the instruments by which tomorrow's families will travel in complete confidence. Into these instruments go all the experience Stewart-Warner has gained in equipping millions of motor cars, power boats and industrial engines of every type.

To this "know-how" will be added new knowledge gained in war. This will result in simple, accurate panels of instruments that will do the job.

Look forward, then, to more Stewart-Warner cooperation with the aviation industry in achieving its goal of "low-cost flying for everybody."

INSTRUMENTS BY
STEWART-WARNER CORPORATION
CHICAGO ILLINOIS

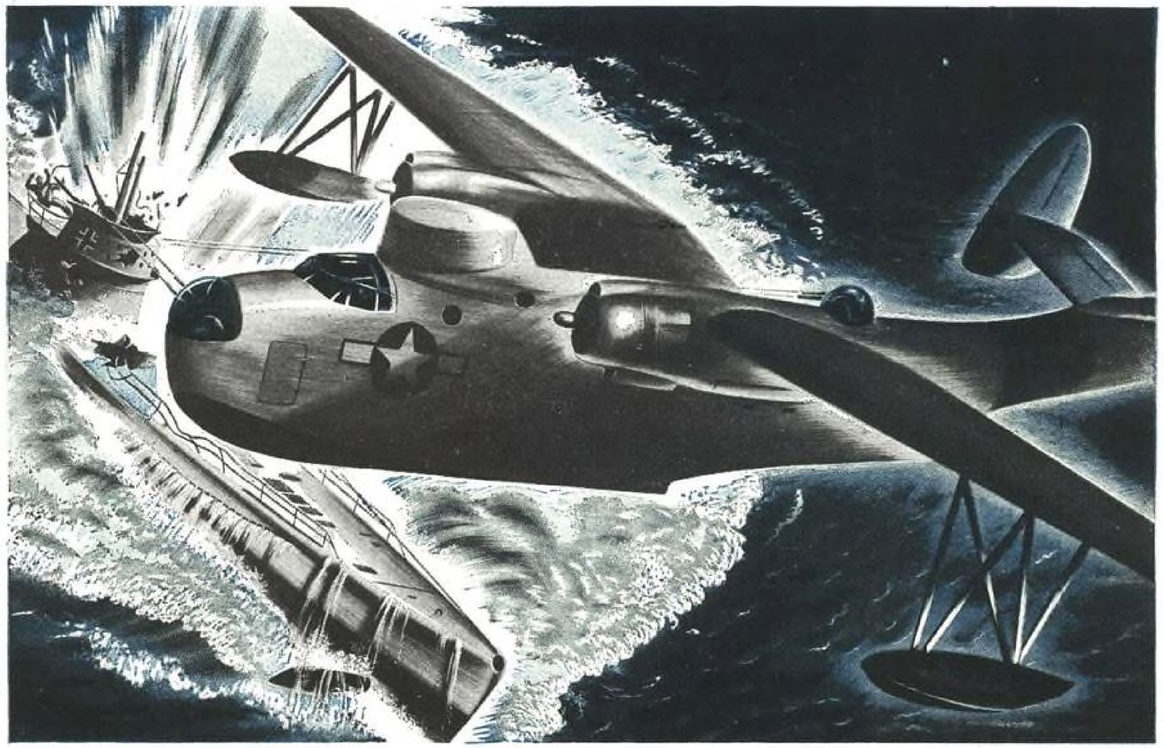

WOLF PACKS BEWARE!
IT'S THE MARTIN MARINER

Contrary to its peaceful name, the Martin Mariner is one of the Navy's most deadly air weapons. Loaded with bombs, depth charges, or mines it can play havoc with the enemy's shore installations and shipping. The Nazis may not know what hit them, but the records show that many a U-boat has been made into mince-meat by this patrol bomber.

Helping to operate its armament-stuffed turrets, its dual dihedral tail controls, and, in fact, contributing to almost every operation of this airplane are laminated plastic parts, fabricated by Taylor in the industry's most modern plant where quality-control and mass production combine to meet the exacting needs of today's aviation industry.

Our engineers are ready now to discuss the many and varied ways in which Taylor Phenol Fibre and Vulcanized Fibre can help the aviation industry to meet higher strength-weight standards, and to solve many other problems. Write us . . . without incurring any obligation.

LAMINATED PLASTICS
VULCANIZED FIBRE
PHENOL FIBRE
In Sheets, Rods, Tubes, and Fabricated Parts

TAYLOR FIBRE COMPANY

NORRISTOWN, PENNSYLVANIA · OFFICES IN PRINCIPAL CITIES · PACIFIC COAST HEADQUARTERS: 544 S. SAN PEDRO ST., LOS ANGELES

PARALLELISM

Copyright 1944 RAMCO

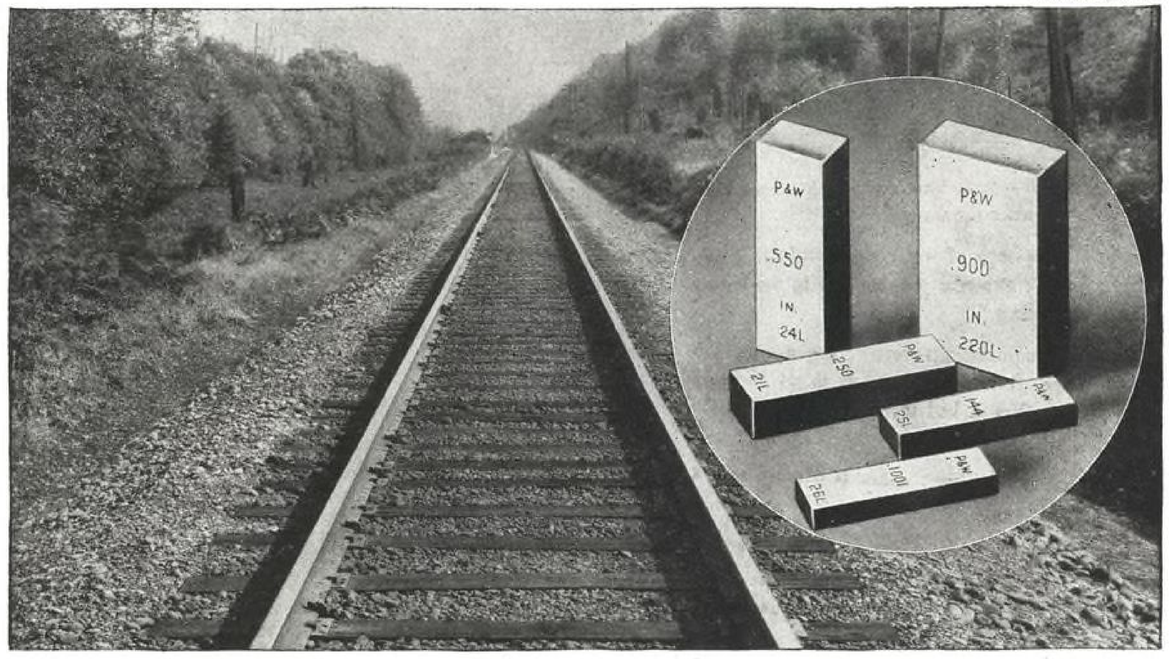

approaching Gage Block Precision!

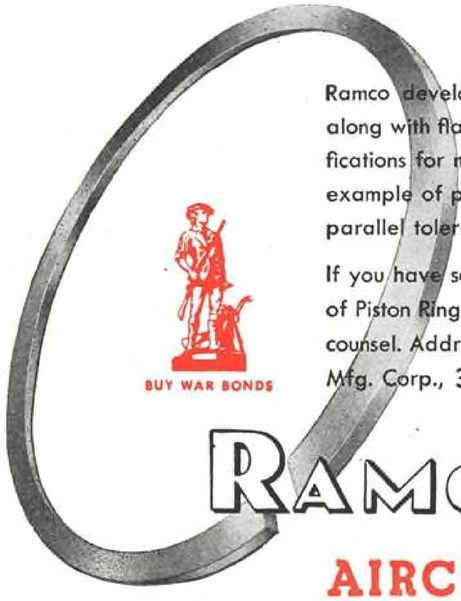

Ramco developments in aircraft ring production insures Parallelism along with flatness and micro finish that meet the most exacting specifications for military aircraft piston rings. A railroad track is a good example of practical parallelism but Ramco Rings are produced with parallel tolerances approaching gage block precision.

If you have some post-war plans in the making that call for the use of Piston Rings, write us about our products, facilities and engineering counsel. Address your inquiry to General Offices, Ramsey Accessories Mfg. Corp., 3706 Forest Park Blvd., St. Louis 8, Mo.

RAMCO MICRO LAP
AIRCRAFT PISTON RINGS

Veteran in Search of a Peacetime Future

THIS veteran knows of no job to come back to after the war.

It was born of war necessity — built to perform a strategic purpose new in the history of aircraft.

The requirements were an engineering challenge. It had to be strong to do its heavy work. Yet it had to be light and fit in the small space available.

That is why even optimists doubted such a device could be built.

But here it is: The Lear Actuator.

Its job is operating flaps, landing gears, shutters and other equipment on the power of an airplane storage battery.

Now, of course, our plants are working round the clock to make enough of these for the fighting ships of Uncle Sam.

But we know that such unique devices, the midget motors that drive them and all the 250 Lear products, must have an important future in some peacetime products.

They may park your car with the push of a button — or do any of thousands of jobs we haven't thought of.

That is why we are telling you about them. We want to find jobs for these able veterans.

And we want you to know that the kind of engineering thinking and production technique that made them possible is available.

PLANTS: Piqua, O., and Grand Rapids, Mich. BRANCHES AT: New York, Los Angeles, Chicago, Detroit, Cleveland, Providence.

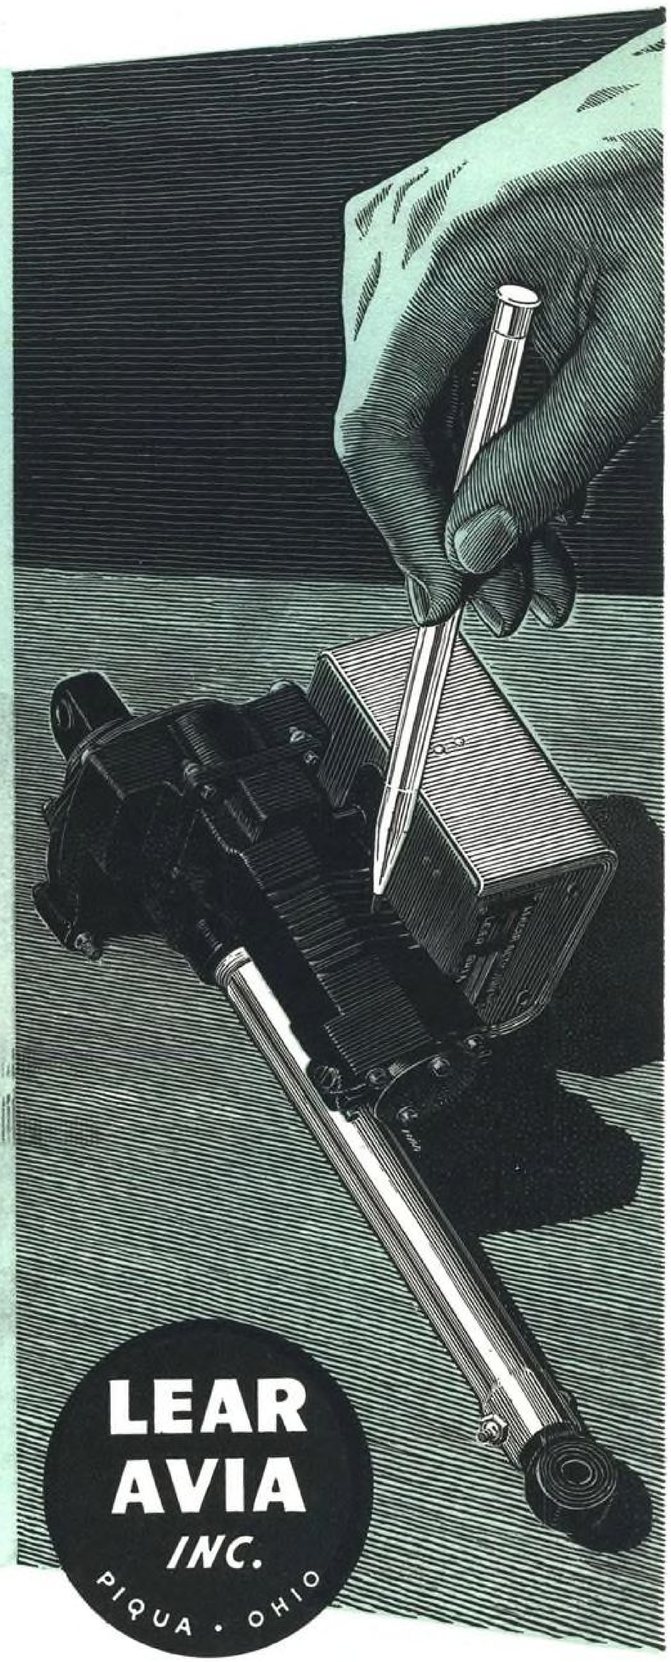

Severance new tool craftsmen regrind worn tools with the same precise skill they use in making new tools. They give each flute the pitch and depth required to eliminate chatter. They carefully grind each tooth so your renewed tools take deep sharp bites like a new Severance Cutter. Each tool is given the Severite heat treat process that increases tooth hardness and length- ens cutting life 3 to 5 times. It will pay you to send your worn and dull cutters (hand ground, mill or chisel cut) to Severance for a factory regrind job.

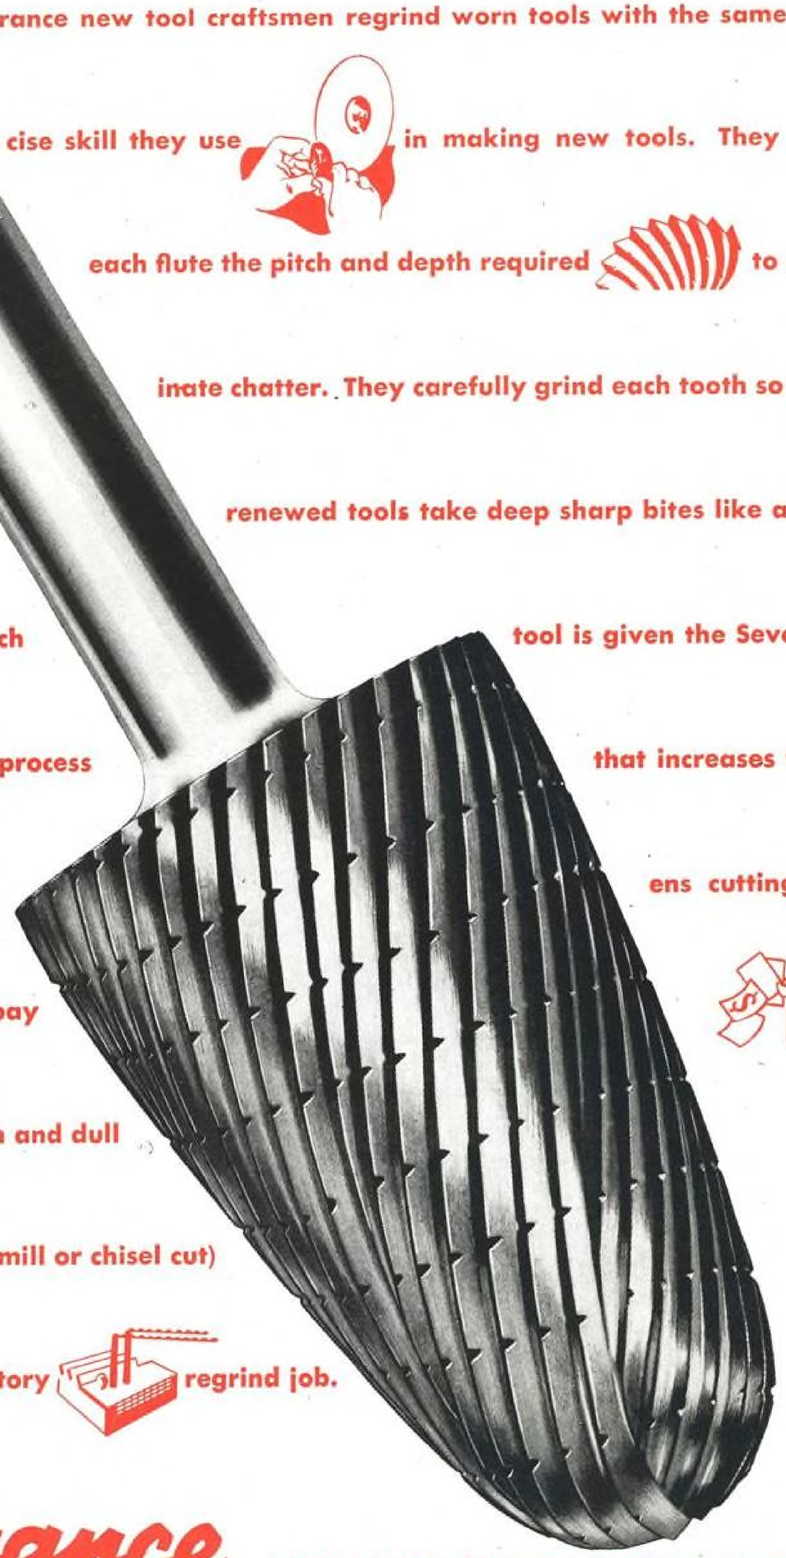

Severance

Midget Milling Cutters • Precision Regrinding

SEVERANCE TOOL INDUSTRIES INC., SAGINAW, MICHIGAN • PLANTS IN LONG ISLAND CITY 1, NEW YORK; DETROIT 2, MICHIGAN; FORT WAYNE, INDIANA; CHICAGO 6, ILLINOIS; AND LOS ANGELES 21, CALIFORNIA. IN CANADA: 60 FRONT STREET WEST, TORONTO, ONTARIO.

Breakdown Tests Give New slants on Insulation

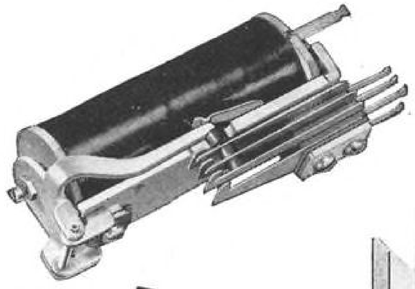

IN special test rooms like this, Automatic Electric relays undergo insulation breakdown tests under extremely high voltage. From long study of such tests, Automatic Electric engineers have developed effective safeguards against high potentials in actual service.

* * *

When war uses of electrical control equipment focused attention on the need for improved insulation, Automatic Electric engineers were well prepared. For insulation technique is a factor in relay design to which they had already given long study. Today, improved methods to meet wartime needs have not only improved the performance of war equipment, but also will add to dependability of peacetime designs.

Similar studies are constantly being made of spring design, contact materials and pressures, magnetic circuits, finishes and coil designs. The resulting experience is one basic reason why Automatic Electric relays perform so dependably under tough conditions.

You can take advantage of this background by calling in the Automatic Electric field engineer. A specialist in electrical control, he works daily with designers of war products, and will be glad to work with *you* in selecting the apparatus best suited to your needs.

AUTOMATIC ELECTRIC SALES CORPORATION
1033 West Van Buren St., Chicago 7, Illinois
In Canada: Automatic Electric (Canada) Limited, Toronto

Relays AND OTHER CONTROL DEVICES *by* AUTOMATIC ELECTRIC

PARTS AND ASSEMBLIES FOR EVERY ELECTRICAL CONTROL NEED

HOW TO SOLVE *Lubrication Problems*

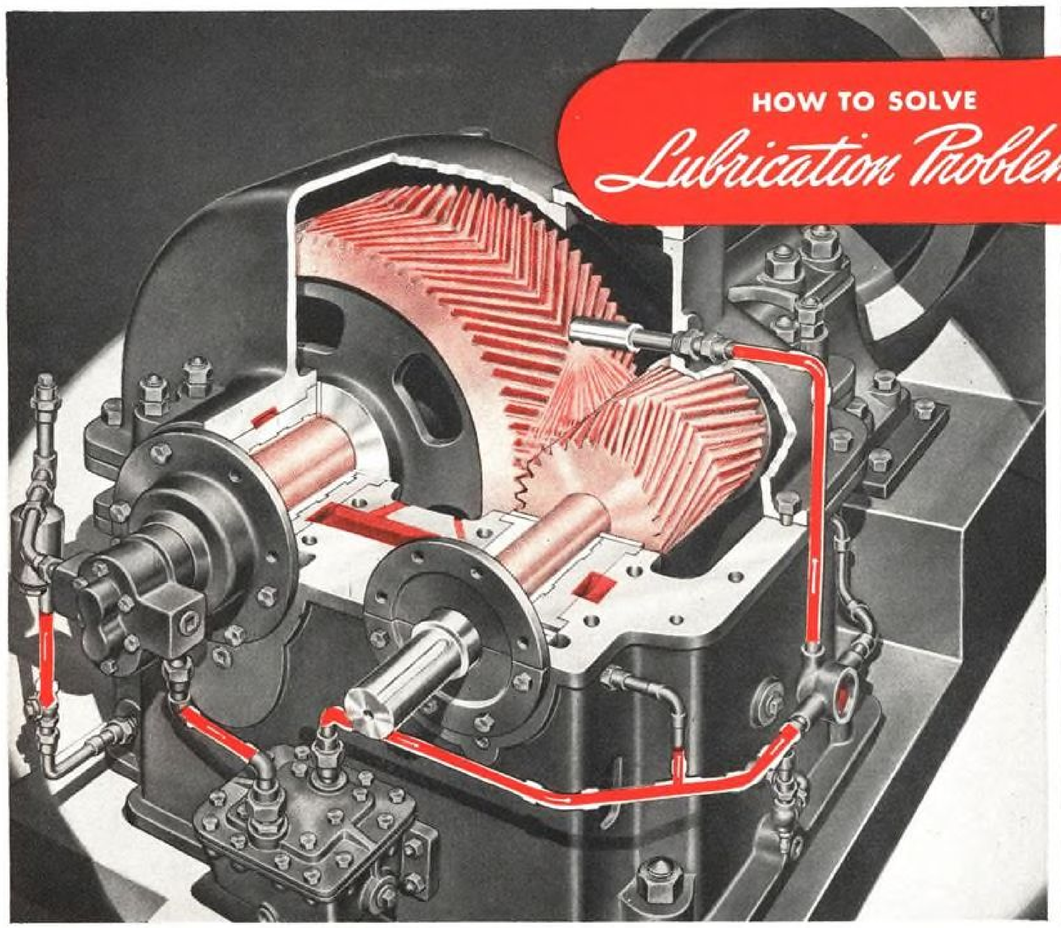

Give your gears these long-life guarantees:

WHEN tooth meets tooth in high-speed gear service, it takes a strong oil film with high lubricating value to resist rupture and wear.

Yes, and when the whirling gears churn oil and air together, the oil must have high chemical stability to fight off oxidation and remain free from sludge and emulsions.

Gargoyle Vacuoline Oils combine these properties and are ideal for the vast majority of all circulation and splash-oiled gear sets. Their strong films resist metal-to-metal contact and reduce wear to a minimum. Their high stability assures long oil life as well as long gear life.

* * *

In exceptionally heavy-duty service, however, where tooth pressures are unusually high and where gears are subject to shock and overloads, Socony-Vacuum prescribes its Gargoyle Compounds. These special lubricants form films that bond to the metal to prevent destruction of the heavily loaded tooth surfaces.

CALL IN SOCONY-VACUUM FOR "CORRECT LUBRICATION"

GARGOYLE Lubricants

TURN PAGE

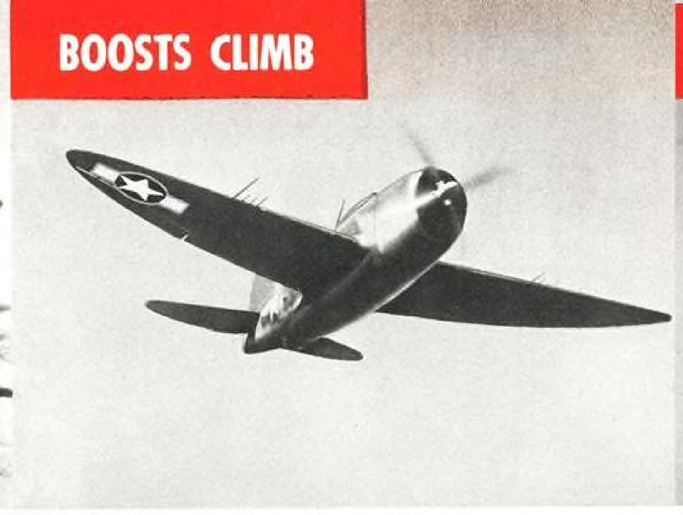

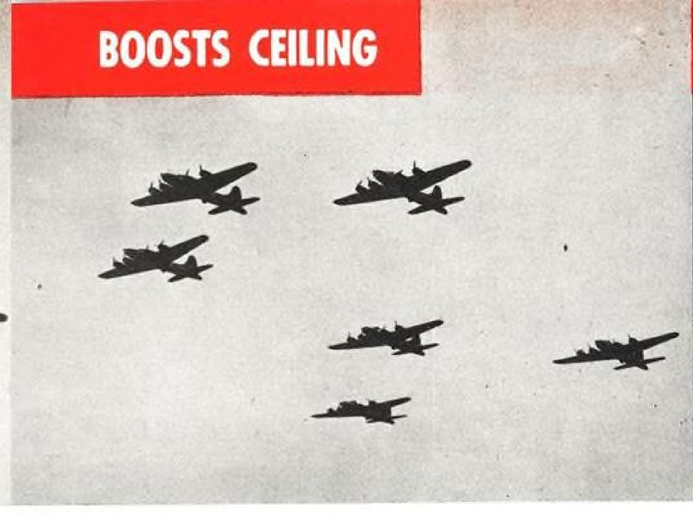

WHAT IS "FLYING HORSEPOWER"?

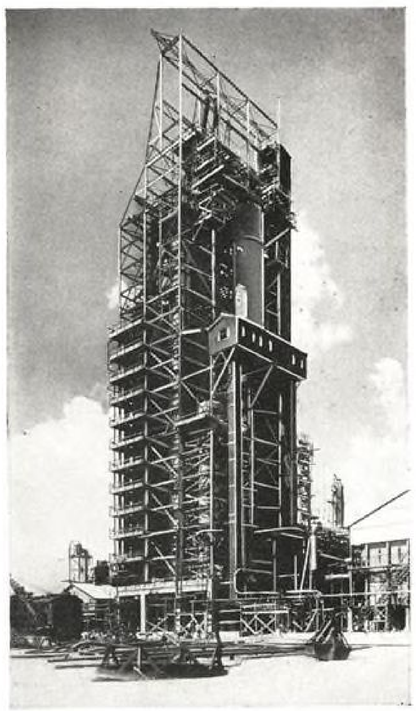

This new TCC Refinery at Beaumont, Texas, first of 21 such Socony-Vacuum units, is "on stream" now producing a flood of base stock for new aviation fuels

ANSWER: The new super fuel power ingredients that tremendously increase the power of American planes—the result of Socony-Vacuum's eleven years of research—$90,000,000 investment in new refining facilities—the greatest Catalytic Cracking development program in the world.

"FLYING HORSEPOWER" is our name for our new super fuel power ingredients that are boosting America's airpower today and are opening new performance possibilities for commercial aviation after Victory.

It has come—not miraculously overnight—but through a period of 11 long years of research in Catalytic Cracking. It is the product of one great development after another.

"Flying Horsepower" is here—not in limited laboratory quantities—but in a swelling flood of base stock, streaming from 14 Socony-Vacuum refineries. It represents an investment of $90,000,000 in new equipment and facilities.

Today, every drop of "Flying Horsepower" is going into the new aviation fuels that are flowing to our bases in England, Italy, China and the Pacific. Boosting the power of these fuels, it's helping make possible shorter, faster take-offs, faster climbs, higher ceilings, bigger payloads and wider range.

And this is just the beginning. After Victory, "Flying Horsepower" will contribute to the development of the new super transports and air freighters now on the drafting boards. Our vast new refining facilities, strategically placed throughout the country, will furnish vast supplies of this super fuel power to help America keep its supremacy in the air.

SOCONY-VACUUM OIL CO., INC.
26 Broadway, N.Y.C., and Affiliates: Magnolia Petroleum Co., General Petroleum Corp. of Cal.

Mobilgas

SOCONY-VACUUM

NEW MOBILOIL AERO TO MATCH!

Along with "Flying Horsepower" to boost aviation fuels, Socony-Vacuum has developed a new Mobiloil Aero for aircraft. Already proved under extreme service conditions, this new oil provides exceptional wear-resisting qualities, and long hours of economical operation.

More Power for America's Wings, Now and After Victory — **"FLYING HORSEPOWER"** — **Mobilgas for Aircraft Use!**

FACTS ABOUT S/V MOBILGREASE LO-HI

Special Grease Works In Temperature Range From -70° to +250° F.

ON SCORCHING desert runways or high in the sub-stratosphere cold, this special S/V Mobilgrease Lo-Hi stays on the job. It's designed to protect aircraft gears through all the extremes of temperature encountered in modern flight. It stands up under cold as low as -70° F., and heat as high as +250° F.

S/V MOBILGREASE LO-HI USED IN:

- ✓ Wing Flap Motors
- ✓ Landing Wheel Motors
- ✓ Bomb Bay Door Motors
- ✓ Plane Control Mechanisms

SOCONY-VACUUM OFFERS A COMPLETE LINE OF:

Aviation Greases

Specially designed greases for high temperatures, low temperatures, and extreme pressure conditions.

Aviation "Specialty" Oils

Special oils and fluids for instruments, low-temperature oils, hydraulic oils, general lubricating oils.

SOCONY-VACUUM OIL CO., INC.

and Affiliates: Magnolia Petroleum Company, General Petroleum Corporation of California

AVIATION DIVISION
26 Broadway
New York, N. Y.

GARGOYLE Lubricants

Socony-Vacuum is backed by 78 years of Lubrication Experience!

CHAMBERSBURG CECOSTAMP

ADVANCES IN CECOSTAMPING TECHNIQUE

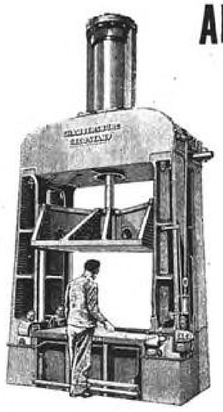

Starting as an improvement on the old rope-drop hammer method of forming sheet metal parts, the Cecostamp has opened up entirely new possibilities in the production of light weight, high strength sheet metal parts of stainless steel and aluminum alloys. In the aircraft production field in particular, many spectacular and significant advances have been made — advances that are continually pushing the limitations of this versatile machine farther ahead. A great many of these jobs have been analyzed and details will be sent to interested engineers, designers and production men.

CHAMBERSBURG ENGINEERING CO., CHAMBERSBURG, PA.

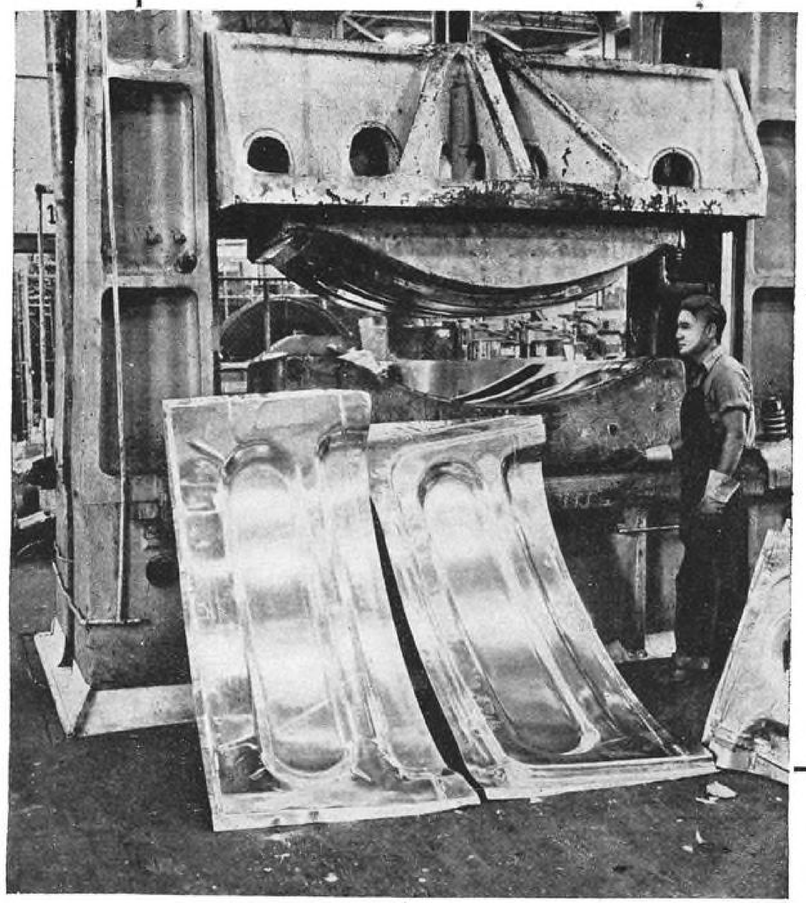

DATA ON PHOTOGRAPH

The two parts shown next to the 96" x 60" Cecostamp are the first and finished stages of a 24 SOAL doubler for a large cargo plane door. Note that in the first stage the material is allowed to flow into the central depression so that it will be there when the outer edge is pushed down in the final stage. If this were attempted in one stage, the outer edge would act as a lock to prevent the center material from going down and would therefore break before fully formed. The die shown in the Cecostamp is the finishing die.

MINIATURE *Precision* BEARINGS *for Precision* INSTRUMENTS *require Precision* GRINDING

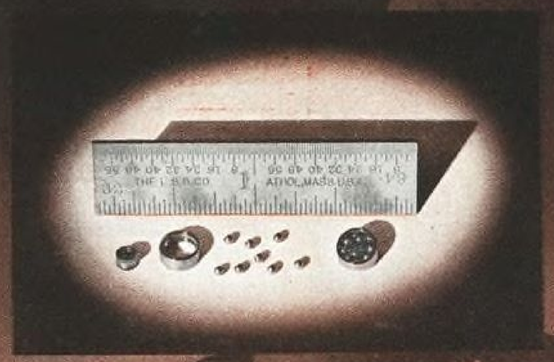

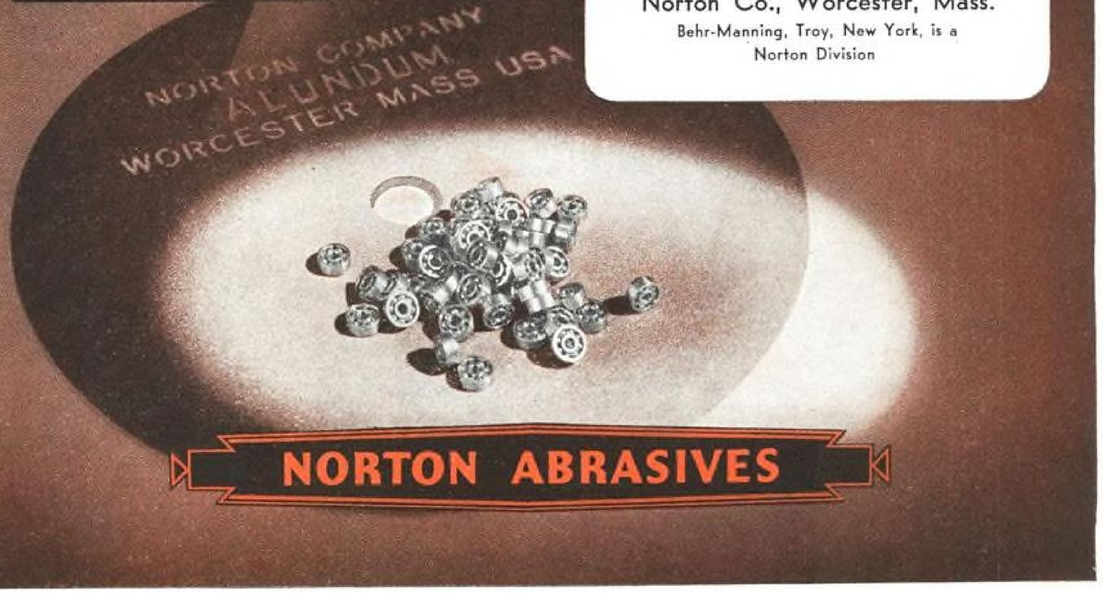

AIRCRAFT Norton GRINDING

MANY aeroplane instruments require miniature bearings—some so small that several can be hidden under an ordinary thumb tack—with bore that only a small needle can pass through. When ground, these bearings must be held to tolerances measured in tenths of thousandths. It is the Norton job to produce grinding wheels to do this highly delicate work—tiny wheels made to operate at 75,000 r.p.m.—just as much as the great snagging wheels that remove large quantities of metal.

Norton Co., Worcester, Mass.
Behr-Manning, Troy, New York, is a Norton Division

NORTON ABRASIVES

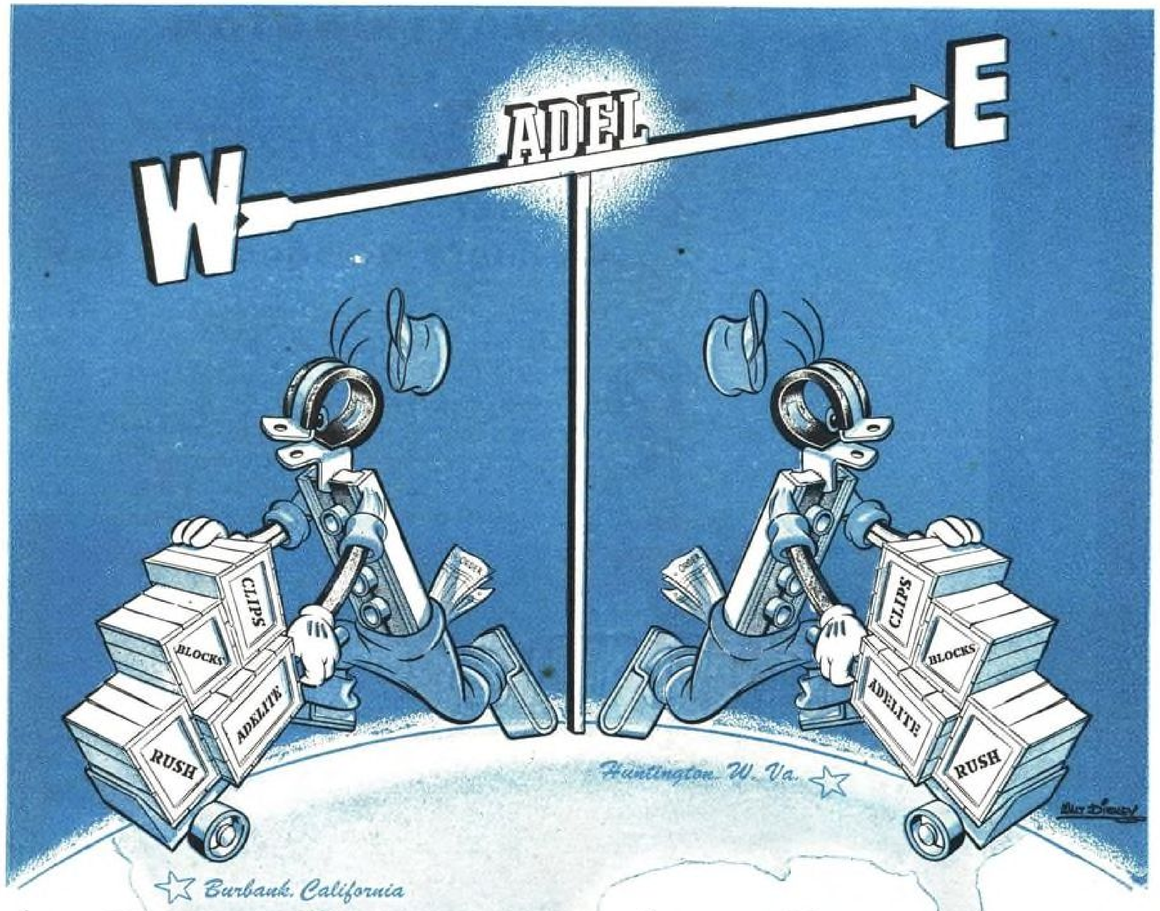

☆ *Two Dependable Sources*

Only ADEL offers two sources of line support clips and blocks—two plants with one high standard of quality. Duplicate tooling and production facilities under the same management and responsibility at Huntington, W. Va. and Burbank, Calif. to save shipping time and expense and render quicker service to both Eastern and Western customers. Many other reasons to specify ADEL: (1) Greatest variety (2) Service-tested quality (3) Competitive prices (4) Dependability of deliveries. Many types in stock ready for immediate shipment. For engineering recommendations on correct support of all fuel, oil, hydraulic lines and electric conduits see nearest engineering service office.

ADEL
PRECISION PRODUCTS CORP.
Burbank, California
Huntington, W. Va.

Engineering Service Offices: Seattle, Washington; Detroit Michigan; Hagerstown, Md.

FOR WAR (AND PEACE) BUY BONDS

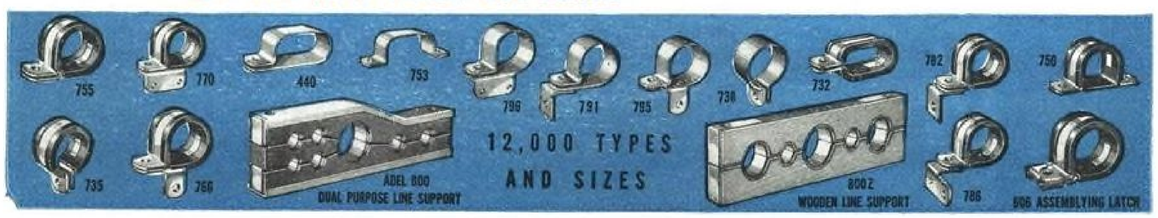

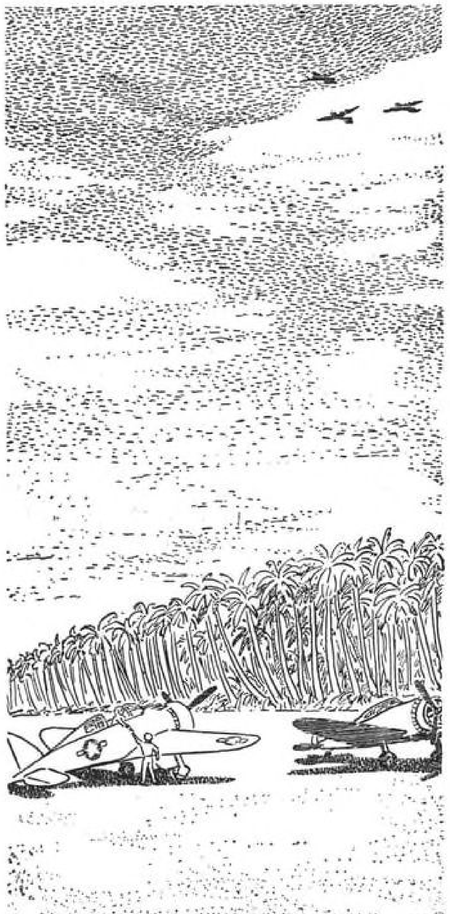

WORTHINGTON
AIRFIELD
"GRASS BLITZER"

Cuts faster
cuts more acreage per day!

Speed is of vital importance to all military operations. The Worthington "Grass Blitzer" is playing its part in the vast, coordinated effort of the United Nations by keeping the Allied airfields in fighting trim — to "keep 'em flying."

Just as speed is a "must" to the fighters and bombers that take off and land from these airfields, so is speed necessary in mowing grass and weeds. The "Grass Blitzer" does the job *three times faster* than any other mower now available. No wonder it is the only gang mower being purchased today for use on our armed forces' airfields!

In one 8-hour day the "Grass Blitzer," operated by one man and cutting a wide 21.1 foot swath, mows an average of *300 acres!* "Grass Blitzer" cut turf assures safe landing and take-off field conditions! The big 9-gang cutting combination can be used efficiently with any tractor or truck available on any airfield . . . even a jeep!

We're proud to be doing our part as a member of the air force "ground crew." We're grateful for the 30 years' experience in turf mowing and maintenance that prepared our organization to produce the "Grass Blitzer."

The Army-Navy "E" *pennant that flies over our plant is a tribute from the armed forces to our employees, to our suppliers, and to our customers — without whose whole-hearted cooperation our full-out wartime production would not be possible.*

WORTHINGTON MOWER COMPANY
Home Office: Stroudsburg, Pa.

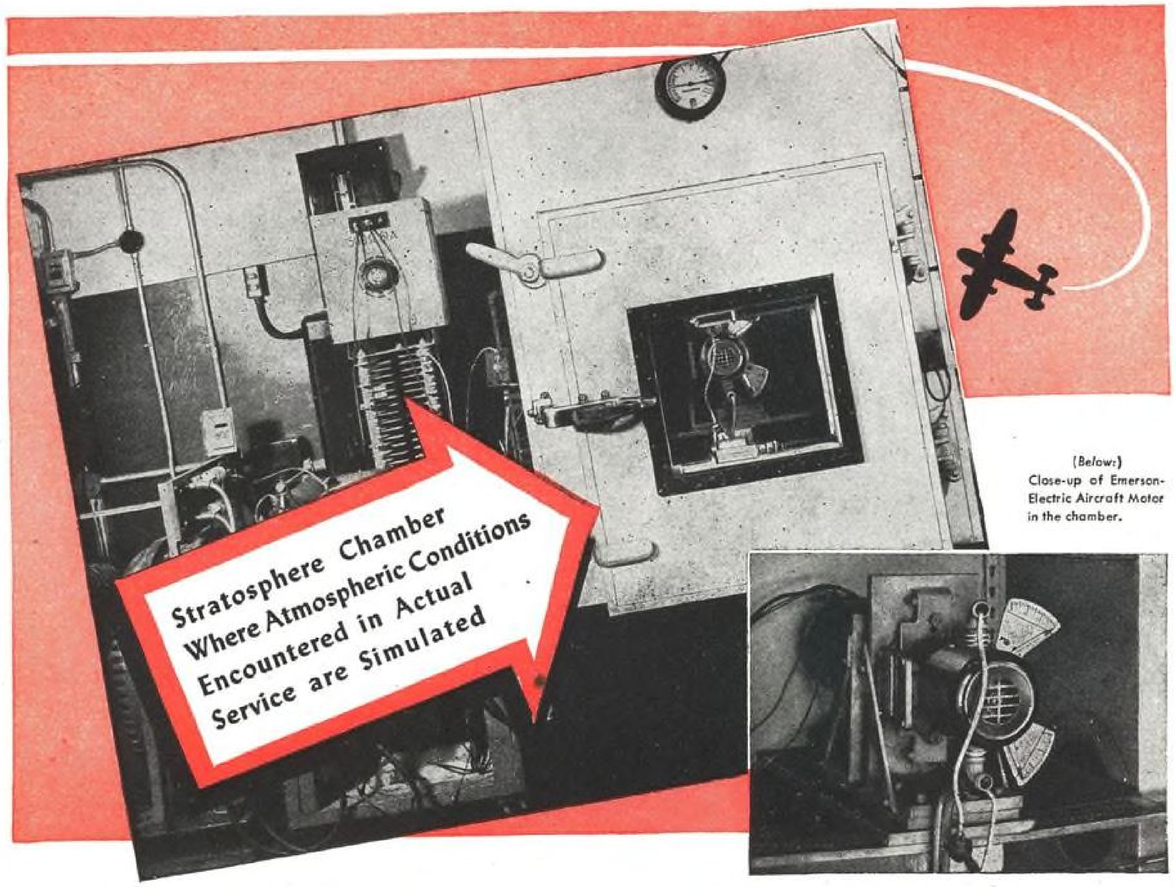

(Below:)
Close-up of Emerson-Electric Aircraft Motor in the chamber.

Down-to-Earth Testing of *High-Flying* Motors

Electric motors for combat aircraft must be able to "take it" in an extreme range of atmospheric conditions. The stratosphere chamber shown above is used for three main purposes:

1. To determine brush life and observe commutation under high altitude atmospheric conditions.
2. To test the acceptability of ball-bearing and gear greases over a wide range of temperatures.
3. To determine the effectiveness of grease seals at the low pressures and temperatures encountered at high altitudes.

Full particulars of production, inspection and testing are given in a new booklet, "Emerson-Electric Aircraft Motors".

THE EMERSON ELECTRIC MANUFACTURING CO., ST. LOUIS 3, MO.
Branches: New York • Chicago • Detroit • Los Angeles • Davenport

378

EMERSON-ELECTRIC AIRCRAFT MOTORS are made for gun turret drives, hydraulic units, fuel pumps, actuators, winterizing units, communication systems—also with built-in gear and magnetic brake.

EMERSON ELECTRIC ELECTRIC

M O T O R S • F A N S • A P P L I A N C E S

"Water Buffalos" are tough on Tojo!

Photo courtesy of Food Machinery Corp.

Let WHITAKER help you with your wiring problem

Whitaker Can Wire It

Through heavy seas and swirling surf, across scorching sands and through dangerous, dense jungles, Uncle Sam's "Water Buffalos" are carrying our fighting men to Victory.

Now that it can be told, we are proud to report that Whitaker supplies the cable assemblies and wiring harnesses for the LVT "Water Buffalos" built for our government by the Food Machinery Corp.

The above is but one of many ways in which Whitaker works with other manufacturers in the production of war needs. Possessing a background of 25 years' experience in the automotive, electrical and radio fields, Whitaker has the "know-how", skilled manpower, and ample plant facilities for a big volume of wartime and post-war production.

We solicit your inquiries. Please mail a wiring diagram or blueprint of the assembly required... Whitaker Battery Supply Company, Kansas City, Mo., St. Joseph, Mo., Philadelphia, Pa., and Oakland, Cal.

★ WIRING HARNESSES

★ BONDING JUMPERS

★ CABLE ASSEMBLIES

★ AIRCRAFT and RADIO CABLE PRODUCTS

WHITAKER

Wartime leadership of Berry Brothers' Aviation and Industrial Finishes will continue into peacetime production. Whether it be finishing materials for the newest rocket plane, on which Berryloid Aviation Finishes are now used, or materials for the newest postwar heating unit, you will find definite, demonstrable superiority in Berry Brothers' Finishes. Let us help you with your postwar finishing problems.

BERRY BROTHERS INC.
Aircraft Dopes · Lacquers · Primers
Detroit 7, Mich. Walkerville, Ont.

BOSTON • JERSEY CITY • CINCINNATI • CHICAGO • ST. LOUIS • INGLEWOOD, CALIF.
MONTREAL • WINNIPEG • TORONTO

ARMY E NAVY

BERRYLOID
AIRCRAFT FINISHES

THIS *Warm Up* FOR "HOT SHIPS"...

needs controls that can take it!

WHEN aviation cadets begin simulated combat work, practice cross-country and tight-formation flying and learn how to land on small fields in these advanced trainers, plane controls really come in for a beating.

Controls must function not only as perfectly and sensitively as in the finest combat planes but they must have an extra margin of strength to take the punishment a heavy, unaccustomed hand on the stick can deal out.

That's why American Tiger Brand Control Cables are used in these famous trainers.

With ample strength to handle maximum loads, these high-quality cables combine lightness, minimum stretch, excellent flexibility and superior resistance to fatigue, wear and corrosion. They are of Excellay Preformed construction which further assures flawless performance. You'll find them used in America's most famous combat and commercial planes.

AMERICAN *Tiger Brand* **CONTROL CABLES**

AMERICAN STEEL & WIRE COMPANY
Cleveland, Chicago and New York

COLUMBIA STEEL COMPANY
San Francisco

United States Steel Export Company, New York

UNITED STATES STEEL

SAVES AIR TIME MONEY

HANSEN
AIRLINE EQUIPMENT

Hansen PUSH-TITE air hose sockets, hose clamps and hose clamp sockets are widely used in aviation plants, shipyards, large and small industrial factories in all parts of the world. They save air, time and money but that is only part of their job—they also increase production far beyond your present peak. • No fussing, twisting or turning with a Hansen PUSH-TITE socket you merely push plug into socket, it is locked tight, air is automatically turned on . . . instantaneous action. To disconnect, merely slide sleeve back, plug is ejected, air automatically turned off. No wastage of air, time or effort. • The above illustration shows Hansen PUSH-TITE air hose socket, hose clamp and hose clamp socket the latter a combination of the other two. Hose clamp and socket can be used together or separately as shown. Hose clamp has two grips instead of customary one, two to one advantages and will handle a safe working pressure of 500 pounds. Require no special tools to install and can be used many times over.

Send for free Industrial Catalog today!

THE HANSEN MFG. CO.
1786 EAST 27th STREET . . CLEVELAND, OHIO

North American Mustangs are equipped with
WITTEK *Aviation* HOSE CLAMPS

These fast, high altitude North American P-51 Mustangs—among the top-flight fighters of the U. S. Air Forces—are equipped with Wittek Aviation Hose Clamps. The dependability of Wittek Hose Clamps, long accepted by the aviation and automotive industries, is now being proven in actual service with the armed forces of the United Nations. Wittek Manufacturing Co., Chicago 23, Illinois.

ARMY E NAVY

War Bonds for Victory
—Buy MORE in '44!

WITTEK Aviation HOSE CLAMPS

● Whether it's hand emergency fuel pumps, vacuum instrument pumps, high altitude pumps, or disposable booster pumps for auxiliary tanks, there is no substitute for DEPENDABILITY. Since the first globe-circling flights with ROMEC pumps, no name has enjoyed a finer reputation for reliability.

ROMEC PUMP COMPANY • ELYRIA, OHIO, U. S. A.

ROMEC AIRCRAFT PRODUCTS

First in Dependability
Romec

AIRCRAFT PUMPS AND ACCESSORIES

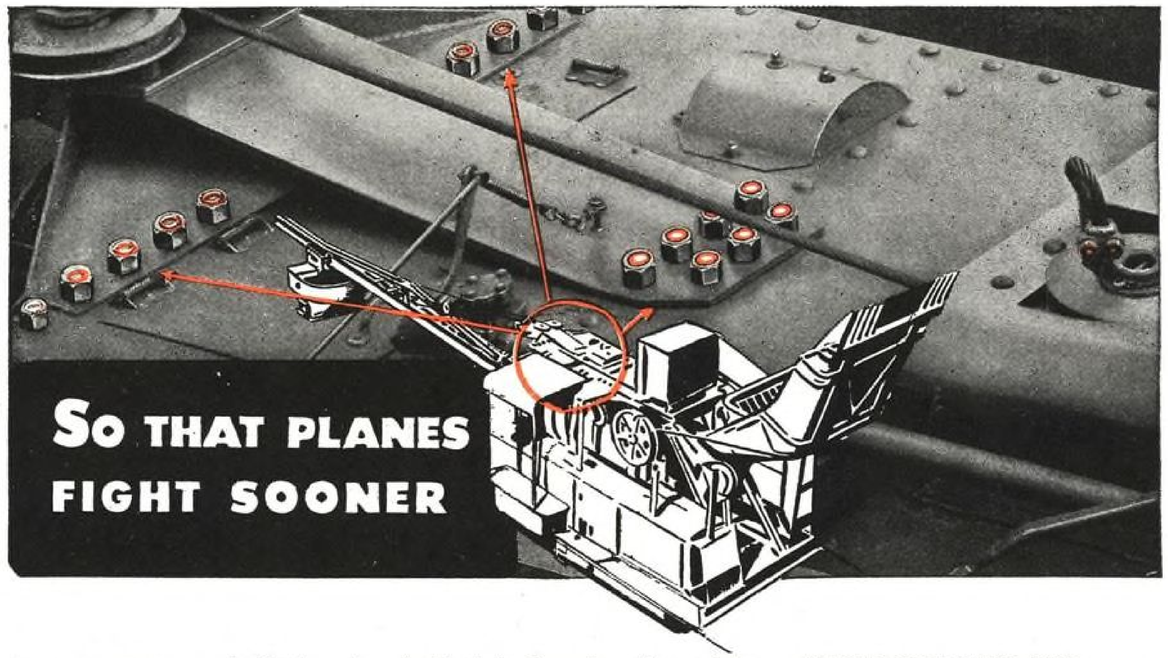

SO THAT PLANES FIGHT SOONER

RANSOME pavers built American highways. Now they are rushing airports along our battle fronts.

Every hour of construction time they can save gives that much advantage to our fighting airmen.

Paving is a shattering job. And it used to be accepted that frequent take-ups and tightening were part of paver maintenance.

But no more! Not since Ransome began using Elastic Stop Nuts—the nuts that stay put.

Now the paver keeps on the go longer, and our planes fight sooner.

The reason Elastic Stop Nuts hold tight in spite of wracking vibration lies in the elastic collar in their tops. This snuggles close around the bolt threads, grips them and prevents the nut from turning and loosening.

Countless fastening problems lie ahead in the coming days of peace. Many of them will be solved successfully with Elastic Stop Nuts. Products will be safer, and longer-lasting. Production equipment will stay at work with less maintenance.

If you are faced with a fastening problem, feel free to call upon us. Our engineers will gladly help you solve it and suggest the proper Elastic Stop Nut.

ELASTIC STOP NUTS HELP BIG, BUSY RANSOME PAVERS DO MANY VITAL WAR JOBS

"Concrete road pavers are subjected to tough, grueling work, especially on twenty-four-hours-a-day service, for which many Ransome Pavers have been called upon in the construction of airport runways since the war started. All told, there are about 1,200 Elastic Stop Nuts used on every Ransome Paver we build. By substituting Elastic Stop Nuts for the ordinary kind, we are helping the Ransome Paver owner minimize his maintenance job because the nuts are self-locking and vibrationproof. No time out for tightening—no extra hours of labor to take up slack. Elastic Stop Nuts also simplify our shop assembly job. They are a further contribution to the improvement of our paver, which is our constant goal."

J. J. Faber Chief Engineer

RANSOME MACHINERY CO., DUNELLEN, N. J.
Subsidiary of Worthington Pump and Machinery Co.

ESNA
TRADE MARK OF
ELASTIC STOP NUT CORPORATION OF AMERICA

ELASTIC STOP NUTS

Lock fast to make things last

UNION, NEW JERSEY AND LINCOLN, NEBRASKA

Poor man's power plant

THE Jacobs engine was designed and built primarily for the working pilot whose plane was his business, whose own resources were his service and maintenance departments. The engine was —and is—as simple, rugged, frill-free and accessible as any engine of its rating can be. It proved its values in the Depression years as a dependable power plant, capable of sustained, day in and day out operation with a minimum of care and low cost maintenance. In crop dusting, charter flights, passenger and mail transport, and in the Canadian bush, it won a reputation as the workhorse of the aviation field.

When the war broke, the Jacobs engine was ready, reliable, proven. Selected for the twin-engine trainers that carry the fledgling pilot through the transition from single-motor to multi-motor ships, Jacobs engines make more take-offs, spend more time at full throttle, than larger units in combat service. And despite student handling, the wear and tear of training, varied climate and field conditions, the Air Forces found that the 350-hour overhaul period first established as regulation was unnecessary; later advanced the period to 700 hours; and lately has authorized 25% more time, with an additional 25% optional with engineering officers.



Jacobs' fine record in serving the Air Forces training program and the taxpayers well and cheaply is an indication of the capacities of these engines that will stand aviation and industry in good stead in the postwar period when costs will count as well as performance! . . . Inquiries are invited. Jacobs Aircraft Engine Co.

JACOBS • **Pottstown, Pa.**

...so Tin-fish can tag their target

BACK THE ATTACK
WITH
WAR BONDS

It's giddy going—dropping these deadly tin fish that are helping sweep the Axis from the seas.

Wire does a big job in making that final split-second pay off in dividends for our side. Wire must play its part, faultlessly, so that engines may deliver their full power, messages flash over the inter-com, instruments give their precision readings. Success depends on the careful handling of details like these.

A request on your letterhead will bring Form No. 838 covering low tension wire and cable and Form No. C-503 containing complete details about Steelductor—the high tension wire famous for better performance and economy.

THE ELECTRIC AUTO-LITE COMPANY
Wire Division
SARNIA, ONTARIO PORT HURON, MICH.

AUTO-LITE AIRCRAFT WIRE and CABLE

TUNE IN "EVERYTHING FOR THE BOYS" STARRING RONALD COLMAN—EVERY TUESDAY NIGHT—NBC NETWORK

Motor-bike built for two

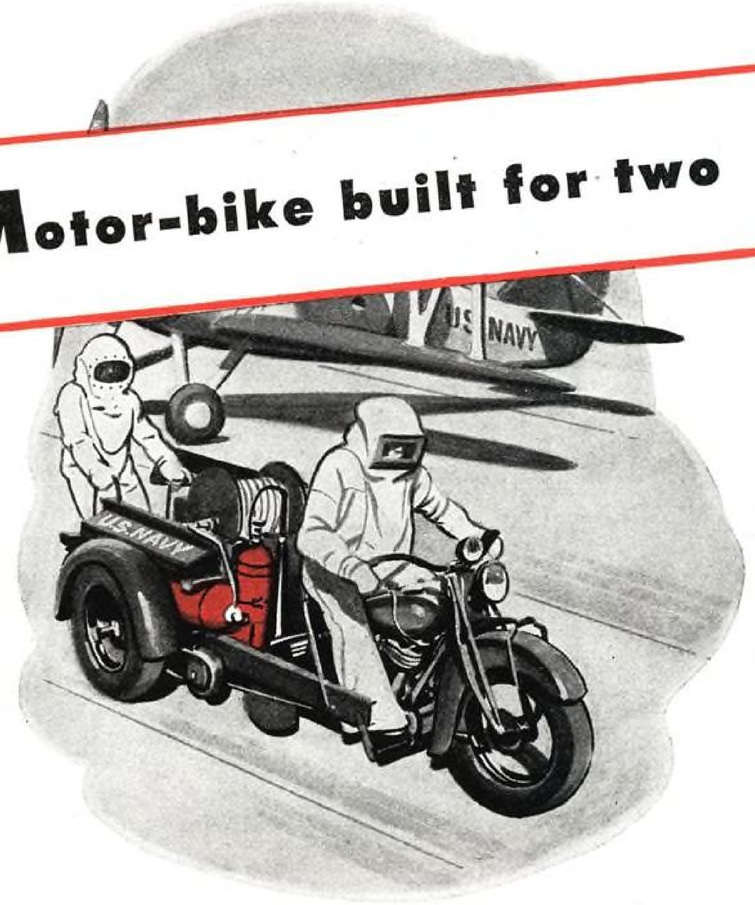

Here's an excellent answer to the need of airports for highly-mobile fire-extinguishing equipment. Manned by asbestos-clad firemen and loaded with Kidde carbon dioxide extinguishers, this motorcycle "crash truck" can rush right up to crash fires and other blazes and snuff them out quickly under a blanket of carbon dioxide gas.

Kidde extinguishers are being mounted in many ingenious ways to make their fast fire-killing effect fully available to air fields. They're carried on large emergency trucks, two-wheeled trailers, jeeps—even on "scooters."

If *you* have a fire protection problem—in the air or on the ground—the wide experience of Walter Kidde & Company in this field will be helpful in finding the best solution. Just drop us a line!

WALTER KIDDE & COMPANY, INC., 516 MAIN STREET, BELLEVILLE, N. J.

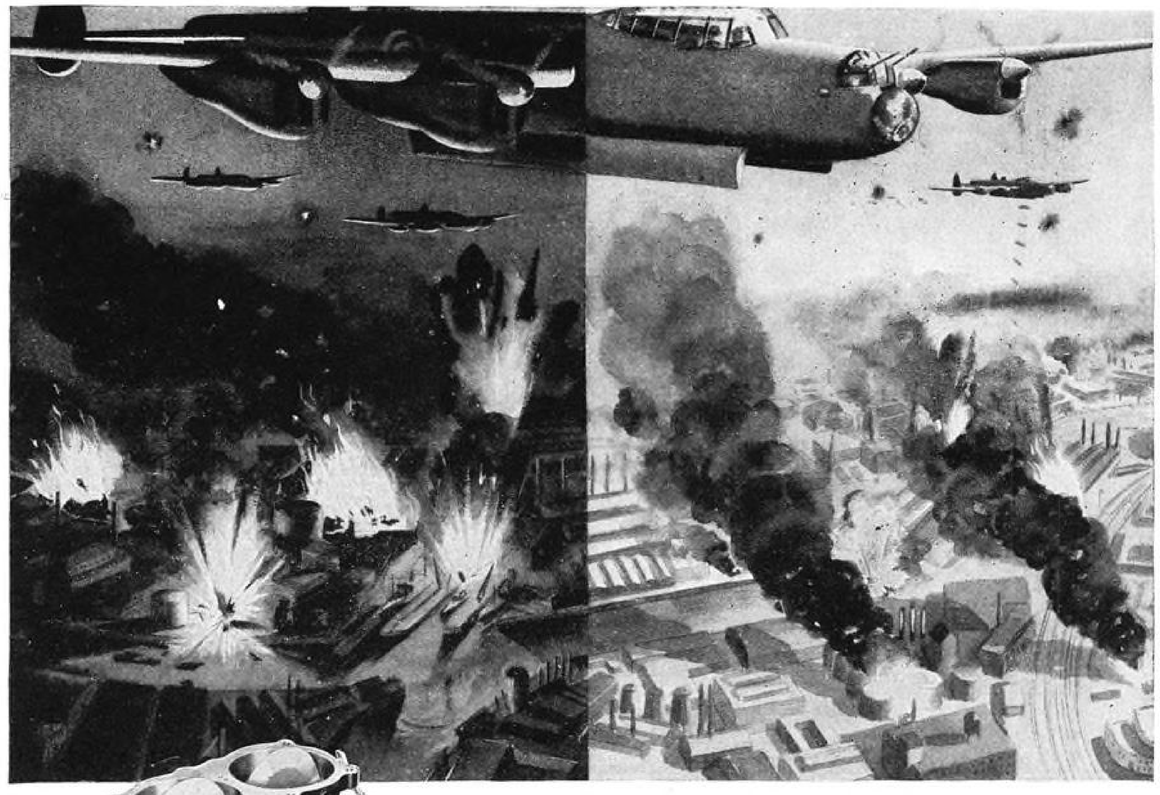



"Round-the-Clock" Bombing

Demands Dependable Carburetion

On the Lancasters, Mosquitoes, and other bombers of the Royal Air Force that have blasted Germany by night—and on the Flying Fortresses and Liberators of the American 8th Air Force that have unceasingly attacked German targets by day—Stromberg* Injection Carburetors provide unfailing power flow regardless of flying conditions. The efficiency of these carburetors in maintaining the right air and fuel mixture conserves gasoline and constantly lengthens the range of bombing missions. Stromberg injection carburetion improves the performance also of fighters, trainers and transports.

**Trademark of Bendix Aviation Corporation*

STROMBERG*

INJECTION CARBURETOR

The Stromberg Aircraft Carburetor is an important member of "The Invisible Crew"... precision instruments and controls, which more than 30 Bendix plants from coast to coast are speeding to our fighting crews on world battle fronts.

BENDIX PRODUCTS DIVISION
SOUTH BEND, INDIANA

THE INVISIBLE CREW
Precision Equipment by Bendix Aviation Corporation

INVASION *and the* FINAL CHALLENGE

The idea that our national security some day would depend upon the successful invasion of continental Europe by our armed forces was inconceivable to the average American but a few short years ago. Yet, today our whole strength is assembled to that very action and for assuring a sound and permanent peace.

America became great without aggression . . . without tyranny. Our greatness has been achieved without destroying others . . . ours is a history of unprecedented industrial progress, of development of our own resources and reliance on our own efforts.

Aggression is foreign to American philosophy. Yet, today we find ourselves faced with the choice of destroying or being destroyed. Today we are confronted by the hard fact that the kind of peace which we all so fervently desire can be achieved only by crushing autocracy and by removing the causes of aggression.

We are now engaged in the accomplishment of the first objective. Since Pearl Harbor a complacent, peace-loving America—the largest of the "soft" and "decadent" democracies—has grown strong and tough. Out of the inherent virility of a free people we have moulded the mightiest force for invasion and attack that the world has ever seen.

We have reached our peak rates of war production. We are producing as much war equipment as all the rest of the world combined.

History will record our industrial mobilization as a phenomenal achievement.

The battle of production has been won!

The full might of our armed forces and those of our allies unleashed against the Axis war machine will bring eventual victory. Two and a half years of intensive preparation, backed by 168 years of growth as a free nation, has given us superiority over twenty years of painstaking preparation by the totalitarian and militaristic countries with their enslaved peoples.

Every American has contributed toward this powerful offensive. Our manufacturers and business leaders have exerted their fullest efforts. Our industries have mobilized their tremendous resources—tapped to the fullest degree their inventive and productive genius. The men and women in the factories, on the farms, and in the mills and mines have played a magnificent

part in the tremendous production program. Citizens all are making their contribution to the armed victory that lies ahead

We have demonstrated that a free people under a free enterprise economy can unite in a common purpose.

* * *

When the war is won, we shall be faced by our second objective . . . removing the causes of aggression. This is a social challenge. A challenge to those who would sacrifice our democratic way of life for personal gains or foreign ideologies.

The best insurance for the continuance of our democracy is a successful democracy. That means a dynamic and not a static democracy. All of us who want to preserve the ideals that have made America . . . and that includes all but a handful of extremists . . . must determine to find the policies and programs which will permit us to make the most of the abundance nature has provided for us.

To achieve this end we must recognize the fact that we are but a wheel in the machinery of world economy. A wheel that must drive or be driven. A wheel that must mesh smoothly with the many other wheels or be stripped of its cogs.

We are the only nation on earth free enough and strong enough to shape the mould of its own destiny. We can be hampered by nothing but our own confusion.

* * *

The mind and the heart of all America today brood over the shores of Britain and watch over the narrow waters that wash the beaches of the Continent. And the prayers of all America go with each of those who embark upon that epic passage.

Those of us at home who are producing the fighting tools and who are so earnestly concerned with the problems that will face a postwar America, should see now, even if we may never have seen it before, that all our plans will be worth just exactly what the men and women who make that passage are prepared, competent, and inspired by their leadership to make them worth.

For those men and women are America!

They have gone out from rich homes and poor homes alike, from farms and factories, from schools and churches, from mines and ranches, from offices and studios, to take their places in the battle line. They are a cross-section of the America that is to be.

Whoever may draw the plans for that America, it is those men and women who will make the plans good. Invasion is their first step toward that end. May their work be speedily done, and may our plans be worthy of that work.

James H. McGraw, Jr.

President, McGraw-Hill Publishing Company, Inc.

THE CRITICS STAND REFUTED

And Sound Engineering Will Keep Them That Way

In October 1942 it became urgently necessary to devote these columns to a severe indictment of the critics of American combat aircraft. A procession of insidious Congressmen and columnists had been playing the age-old game of promoting themselves at the expense of aviation.

Our righteous indignation was not prompted primarily by a desire to defend the aircraft industry, even though it should have been defended if the nation was to be defended. It was prompted by the shocking realization that armchair strategists and overnight experts were incalculably damaging morale of the young men going out to fight our battles.

The war had torn these youths away from football teams or varsity crews for rapid transformation into legal killers and they were flying out to war with deep-rooted reservations about the quality of their weapons compared with those they were to meet in battle. Most of the newspapers of the nation and many of the sounder columnists cooperated with us splendidly in helping to spread the truth about our airplanes.

We began by telling the story of a typical young pilot who came into our office for reassurance, a new pair of wings on his breast and a troubled look on his face. Time passed, then a few weeks ago this same young man returned to us after more than a year of action in a war theater where quarter is neither asked nor given. This time he was wearing a campaign ribbon with two stars, an Air Medal ribbon, a Distinguished Flying Cross ribbon, and a Presidential Citation ribbon with one cluster, a second to be added soon. Flying in one of the most-maligned fighter aircraft of the war, he had succeeded in completing nearly 100 combat missions. His group had scored over 400 victories at an established ratio of better than 30 to 1 over the enemy. His squadron had lost but seven pilots in nearly two years of combat. Quite a record for "no-account" and "obsolete" airplanes!

This brilliant performance of American pilots and planes is not an isolated case. On all the fighting fronts our men and planes are proving irrefutably that each of them is more than equal in courage and quality to many of those of our enemies. Truly we have no apologies to make for any of our flying equipment.

But this is neither the time nor the place for resting upon our hard-won laurels. Let us remember that our enemies have brains, too, and that they are not sitting idly by waiting for us to design new and even better planes. We should be neither surprised nor disconcerted if some of the brain children of Papa Heinkel, Willy Messerschmitt, or Herr H. Focke appear over the Western front in the form of new spring models. These ingenious minds have been working for quite a while and some results are about due.

It may be that this will be the Nazis' last fling and we can look upon the battle to be enjoined with confidence that our own present and forthcoming equipment will prove superior to anything the enemy is likely to introduce. At the same time we feel certain that the test will tax both our ingenuity and design to the utmost and we fervently trust that allowance is being made for protracted effort. That allowance can only take the form of *continued* qualitative superiority achieved through endless research and engineering development.

We must remember that the Nazis elected to freeze design and to concentrate on numbers. This decision, which in effect was to divert their energies away from research and development, is one of the principal reasons for *our* standing on the threshold of victory—where the Nazis once stood. The position is reversed in some respects, hence we must take caution. Our enemies have gone back with much vigor to basic research. Whether at war or at peace, let us not relax—ever!

Leslie E. Neville

Editor

HERE ARE YOUR MARKETS

PART I—MIDDLE ATLANTIC, NEW ENGLAND, AND SOUTH ATLANTIC REGIONS

By JOHN FOSTER, Jr., *Associate Editor, "Aviation"*

Presenting a comprehensive state-by-state and region-by-region survey—the first ever published for the aviation industry—analyzing data for the determination of a sound distribution network.

MERCHANDISING ITS PRODUCTS has always been one of the toughest and, in many cases, most sorely neglected problems faced by the aircraft industry.

In the not-too-profitable past, airplane distribution has too often been a hit or miss proposition; too often the distributor-dealer set-ups, like Topsy, "jest growed." If production for private flying is to reach profitable proportions, the prime requisite is establishment of complete, well organized distribution organizations. "You gotta sell 'em if you want to keep making 'em" is an axiom that will apply to aircraft production as much as it has to production of automobiles or washing machines.

In any attempt to set up such a distribution organization, the first step is to gather and correlate information that will answer two principal questions: Who are the potential customers? And where are they?

As a service to the industry, AVIATION is presenting through this series some of the basic information to answer these and other vital questions—information which reveals, for example, that New York, Pennsylvania, and California show up as the best individual aircraft market states, and that these three states are salient in two of the three best marketing regions.

The information will be arranged to be of value not only to manufacturers but to those who would continue to be, or plan to become, aircraft or accessory and parts distributors or dealers. Thus, for each state and region there will be presented the following data:

1. Total family population. This measure of determining the number of potential customers is used largely because the families are felt to comprise the greatest portion of the aircraft market and because in this classification usable statistics are readily available.

2. The percentage of each state's and region's family population, each related to the United States as a whole.

3. Percentage of state and regional buying income, each related to the country as a whole. Buying income, defined as "the available spendable money," is the money for which aircraft manufacturers and their distributors will have to compete (against automobile, refrigerator, boat, and all other manufacturers).

4. Percentage of United States retail sales, an added guide to the buying power and buying habits of each state and region.

5. Number of passenger automobiles registered. This is a straight numerical rating, state by state, giving clues both to transportation needs and uses of buying income.

6. Number of passenger autos per 100 families, on a state and regional-range basis.

7. Number of aircraft registered—by state and region—as of Oct. 1, 1941, the latest available peacetime data. This, of course, is one of the best indices of past acceptance of private flying.

8. Percentage of aircraft registrations, by state and region, each related to the country as a whole.

9. Number of non-airline pilots registered by state and region as of Oct. 1, 1941, latest available peacetime data. This also is an important index of past aviation acceptance.

10. Number of airports. Personal plane utility—or lack of it—has always been one of the dominant factors in aircraft sales; the number-of-airports figures serve not only as a measure of utility but also as a guide in picking distributor-dealer locations.

11. Number of airports per 1,000 sq. mi., an added guide for distributor-dealer locations.

12. Percentage of airports. Like other percentage figures, this relates the state and region to the country as a whole, for comparative purposes.

13 & 14. The data as a whole will also be measured by states so that a final market rating of Class A, B, C, D or E can be applied for comparative purposes. Similar measurements will be made for the regions, with the market ratings ranging from first to ninth in importance.

Although the airplane tends to eliminate geographic and economic barriers common to other transportation forms, usable statistical data is available by geographic measure—states and regions—thus the information must necessarily be presented on that basis.

The regions employed in this study are those established by the Chamber of Commerce of the United States and have been most widely accepted in market studies. They are set up as follows:

New England—embracing Maine, New Hampshire, Vermont, Massachusetts, Rhode Island, and Connecticut.

Middle Atlantic—New York, New Jersey, and Pennsylvania.

South Atlantic—Delaware, Maryland, Virginia, West Virginia, North and South Carolina, Georgia, and Florida.

East North Central—Ohio, Indiana, Illinois, Michigan, and Wisconsin.

West North Central—Minnesota, Iowa, Missouri, North and South Dakota, Nebraska and Kansas.

East South Central—Kentucky, Tennessee, Alabama, and Mississippi.

West South Central—Arkansas, Oklahoma, Louisiana, and Texas.

Mountain—Montana, Idaho, Wyoming, Colorado, New Mexico, Arizona, Utah, and Nevada.

Pacific—California, Oregon, and Washington.

Since, as noted, the airplane tends to eliminate geographic and economic barriers, there will naturally appear to be some overlapping of distribution areas between states and regions, but as the picture for the country as a complete unit takes shape, this apparent overlapping can be obviated.

Acknowledgment

● **In preparing this series, AVIATION has been greatly aided by Joseph T. Geuting, Jr., vice-president, General Aircraft Corp.; A. T. Hapke, Jr., Republic Aviation Corp.; and E. E. Lothrop, manager, research and statistics department, Aeronautical Chamber of Commerce. Meanwhile, special thanks go to Frank Christian, of H. B. Humphrey Co., who has given most generously of time and counsel.**

Middle Atlantic

Because it includes two of the "hottest" states marketwise, and has the No. 1 rating, the Middle Atlantic region will be considered first. The data for its three states of New York, New Jersey, and Pennsylvania, taken "across the board," shape up as shown in Table I.

The heavy concentration of population in and adjacent to the metropolitan New York City area accounts in a large measure for New York state's high rating in the family population category, as well as for similar ratings in buying income and retail sales. Nevertheless, the state outside this metropolitan area stands up well enough to make it compare favorably with other states as a potential aviation market. This is borne out by the index of transportation needs—passenger automobile ownership—in which New York state leads the nation with 2,286,382 cars.

Table I—Middle Atlantic Region

	New York	*New Jersey*	*Pennsylvania*	*Total*
1. Family pop.	3,662,228	1,100,260	2,516,423	7,278,911
2. Percent, nat'l. pop.	10.6	2.9	6.8	20.3
3. Percent, U. S. buying income	12.98	4.3	7.94	25.21
4. Percent, U. S. retail sales	11.03	4.14	7.74	22.91
5. No. passenger cars	2,286,382	875,762	1,781,467	4,943,611
6. No. cars per 100 families	62	80	70	68
7. No. aircraft registered	1,676	655	2,372	4,703
8. Percent aircraft registered	7.2	2.8	10.2	20.2
9. No. pilots registered	6,299	2,281	4,435	13,015
10. No. airports	130	59	155	344
11. Airports per 1,000 sq. mi.	2.71	7.84	3.44	.....
12. Percent airports	4.6	2.0	5.4	12.0
13. State market rating	A	A	A	.....
14. Regional market rating	.....	.....	.....	First

As to straight aircraft data, however, the Empire State drops off in two phases. Registrations of 1,676 aircraft—7.2 percent of the nation's total—put it in third place, following Pennsylvania and California, which "win" and "show" respectively. In number and percentage of airports—130 and 4.6 New York compares well with other states, but its 2.71 airports per 1,000 sq. mi. put it in seventh place on a nation-wide basis.

It should be noted that, despite the population concentration in and around New York City, just under one-fifth of the state's airports are in that area. The city's most important commercial airport is, to all intents and purposes, closed to the average private flyer. This closing of large commercial airports to personal flying is a factor which must be carefully studied and closely watched in other large centers, both today and as scheduled air transport operations grow.

In considering New York state for distribution of aviation products, it should be remembered that while much of the population and income are concentrated, the state also has a high percentage of rural families—families which often have surprisingly large amounts of "cash money" to spend on better means of transportation. By the same token, much of New York City's population is used to commuting. Although limited to a small group of wealthy businessmen, commutation by air had reached its highest stage of development (before the war) in this area.

While it is impossible to get accurately measurable data on water landing facilities, it must be remembered that New York has a large number of lakes, well distributed over the entire state and usable for eight to nine months of the year. While this might well be an added factor in considering production of amphibious or float planes, it is not at this time believed that actual distribution locations would be greatly altered.

On the basis of measurable data alone, however, New York can be considered a Class A state for the distribution of aviation products. Indeed, it ranks as the most important in the country on a state-by-state basis.

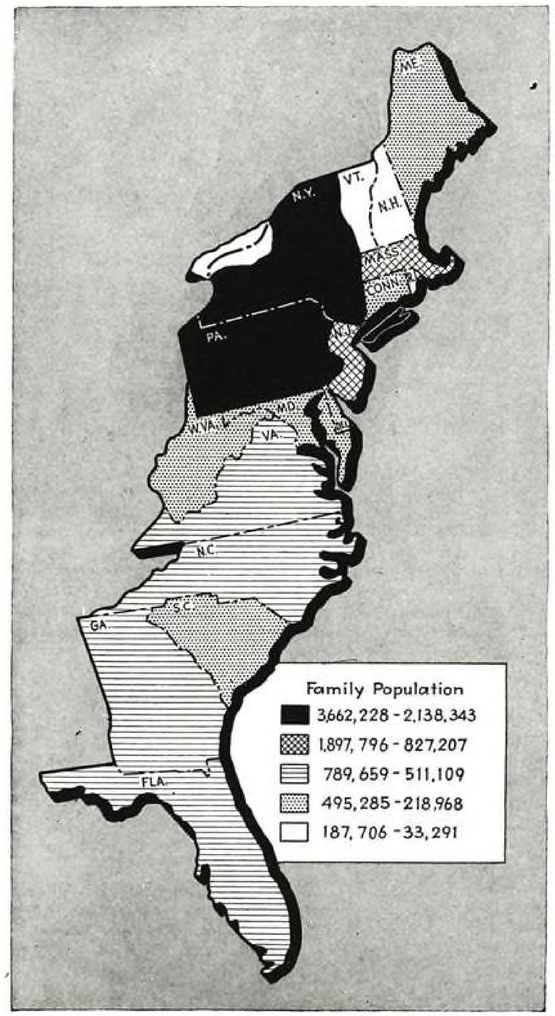

Visual comparison of family population ranges in states comprising New England, Middle, and South Atlantic marketing regions, where actual totals run from 92,435 in Vermont up to 3,662,228 in New York. Note that two of three Middle Atlantic states are in highest bracket—shown as solid black—while New England states embrace three of five ranges and South Atlantic two middle brackets.

Because of its location adjacent to New York, some of the previously-mentioned overlapping influences have their effect on New Jersey as a marketing area. Although, comparatively, it is small, the state rates well on the basis of the market criteria.

While its family population of 1,100,260 is ony 2.9 percent of the national total, New Jersey accounts for 4.3 percent of the buying income and 4.14 percent of the retail sales, and its ratio of passenger cars owned is about the same as that in New York.

With aircraft registrations totaling 655, New Jersey has 2.8 percent of the country's planes owned; 2,281 non-airline pilots give it a good rating in this respect. With 59 airports—well distributed over the state—New Jersey has 2 percent of the nation's total, but with 7.84 ports per 1,000 sq. mi. it has the best coverage of any state in the union. Many protected harbors along the coast-line and good distribution of usable lakes in the northern summer resort section give New Jersey an excellent position for use of water-based craft over a large part of the year.

Based on the measurable data of family population, buying income, retail sales, automobile ownership, aircraft and pilot registrations, and airport facilities, New Jersey adds up to a Class A market, standing as eighth most important.

As previously indicated, Pennsylvania also measures out as a Class A market, for in practically every category it has a high rating. It encompasses, for example, the third highest percentage of airports—5.4—in the country, being led only by California and Texas, which have 7.8 and 7.7 percent, respectively. Moreover, Pennsylvania's 3.44 ports per 1,000 sq. mi. give it sixth place for the country by this measurement.

Geographic distribution of these Keystone State landing facilities is normal, following closely the distribution of population, with airways generally in an east-west direction across the middle of the state. However, a distributor-dealer set-up would undoubtedly be affected by the fact that the state is bisected in a northeast-southwest direction by the Allegheny Mountains and the fact that the northeast part of the state in the anthracite mining region, is likewise largely mountainous. Compared with New York and other states, Pennsylvania does not have a large number of water bodies suitable for amphibious or float plane operations.

With a total family population of 2,516,423, this state has 6.8 percent of the nation's total, accounting for 7.94 percent of the buying income and 7.74 percent of the retail sales. These factors, together with its consistently high aviation ratings, give Pennsylvania its Class A market rating. It's the third most important in the country.

Considering the three states together as the Middle Atlantic Region, these guides develop the following facts:

The combined family population of 7,278,911 accounts for 20.3 percent of the nation's total, giving a numerical answer to one of the main questions: Where are the potential customers? The people in these states have over a quarter—25.21 percent—of the nation's buying income and have accounted for 22.91 percent of the country's retail sales, helping to answer the question: Who are the prospects?

A clue to transportation needs—or at least habit—is given by ownership of 4,943,611 passenger automobiles, or an average of 68 per 100 families. This auto ownership is significant in view of the fact that distances between cities are not great and that other forms of transportation are the most highly developed in the country.

As to past aviation acceptance, the 4,703 registered aircraft represent 20.2 percent of the United States total, closely paralleling the ratio of family population. The 13,015 non-airline pilots, however, are a shade over 14.3 percent of those in the country, and the 344 airports comprise 12 percent of all those available.

Due in no small measure to New York's large family population and buying power, Pennsylvania's high aviation-acceptance rating, and New Jersey's consistent comparative ratios, the Middle Atlantic Region ratings in the various market criteria add up a most important in the country as an aviation product distribution area.

"As Maine goes, so goes the nation" is an adage that holds true in aviation distribution measurements just about as it recently has in politics. For, in examining the New England Region—Maine, New Hampshire, Vermont, Massachusetts, Rhode Island, and Connecticut—market ratings from Class A to Class E appear, as shown in Table II.

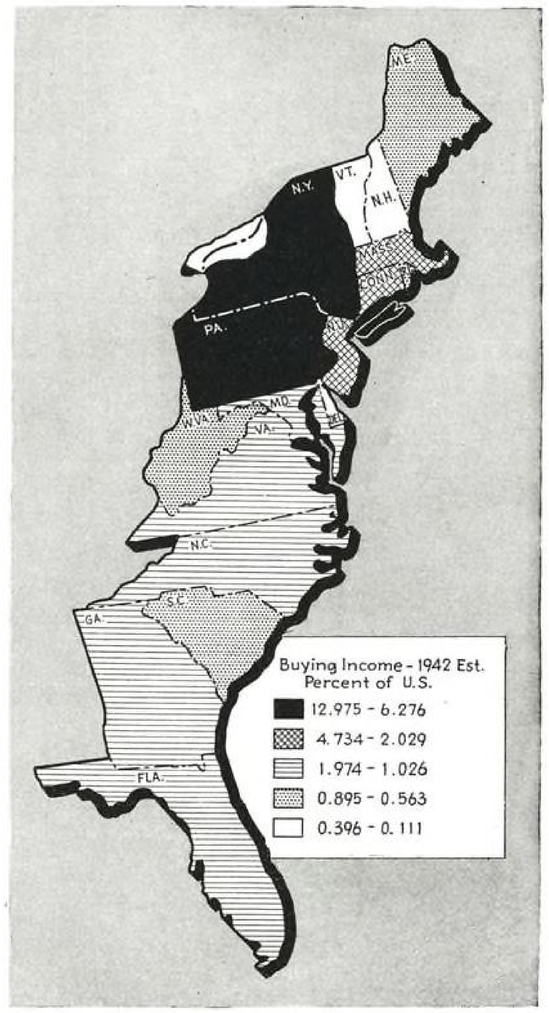

Ranges of buying income—for which aircraft manufacturers, distributors, and dealers will have to compete against all comers—are shown for eastern portion of United States in this map covering New England, Middle-, and South Atlantic marketing regions. Here again, all three Middle Atlantic states are in two highest brackets, while New England and South Atlantic states embrace three.

Maine's family population of 218,968 makes up but 0.6 percent of that of the United States, a ratio closely paralleled by its 0.67 percent of the national buying income. On retail sales, however, the ratio climbs slightly, being 0.75 percent of the country's total. Transportation needs are clearly shown by the 149,378 passenger autos owned, giving the state an average of 68 cars per hundred families.

As to past aviation acceptance, there are these indices: Maine's registration of aircraft on the last available date totaled 178, or 0.8 percent of the U. S. total, and 463 of the 90,603 non-airline pilots in continental United States were registered in the state. This smaller-than-average number of planes and pilots may be due in part to the fact that Maine's 28 airports—0.91 per 1,000 sq. mi.—comprised exactly 1 percent of those in the country.

The state's sparseness of airports is clear evidence that aviation has not received the same attention as have other transport means in the course of the state officials' excellent job of promoting Maine as a pleasure resort, and this same shortcoming is noted in many other states. While it is true that Maine's shoreline and comparatively large number of inland waters make the state well suited for water-based aircraft, the weather must be considered, for utility of this type of craft may well be limited to spring, summer, and fall months. Seasonal dealer and service operations, however, might prove profitable in a New England distributorship.

Table II—New England Region

	Maine	New Hampshire	Vermont	Mass.	R. I.	Conn.	Total
1. Family pop.	218,968	132,936	92,435	1,120,694	187,706	448,682	2,201,421
2. Percent nat'l pop.	.6	.4	.2	3.2	.5	1.4	6.3
3. Percent U. S. buying income	.67	.32	.25	4.12	.71	2.20	8.27
4. Percent U. S. retail sales	.75	.38	.30	3.95	.79	2.22	8.38
5. No. passenger cars	149,378	97,508	67,971	766,929	151,558	405,904	1,639,248
6. No. cars per 100 families	68	73	74	68	81	91	75
7. No. aircraft registered	178	87	67	556	164	251	1,303
8. Percent aircraft registered	.8	.4	.3	2.4	.7	1.1	5.7
9. No. pilots registered	463	365	293	2,197	327	800	4,445
10. No. airports	28	15	12	52	7	25	139
11. Airports per 1,000 sq. mi.	.91	1.66	1.29	6.57	7.00	5.10	.....
12. Percent airports	1.0	.5	.5	1.7	.2	.9	4.8
13. State market rating	E	E	E	A	D	C	.....
14. Regional market rating	.....	.....	.....	.....	.....	.....	Seventh

A total of 2,197 non-airline pilots were registered in this state, and the 556 aircraft tabulated comprised 2.4 percent of the national total. Its 52 airports—6.57 per 1,000 sq. mi.—account for 1.7 percent of those built throughout the country. Majority of these landing facilities are pretty well concentrated in the eastern portion of the state, following the concentration of population. Aside from the shoreline, Massachusetts has no considerable amount of facilities for water-based craft.

Economic factors which deserve special thought in any consideration of Massachusetts as a marketing area include the fact that the state is highly industrialized, being the site of a goodly share of the so-called "heavy" industries which have been subject to sharp fluctuations.

Rhode Island, 39th in importance on a nation-wide basis, is the only one of the New England states to fall in Class D, due in no small measure to its extremely small area. With 187,706 families, it has 0.5 percent of the nation's population and accounts for 0.71 percent of the buying income and 0.79 percent of the retail sales. Its 151,558 passenger cars give it a high auto-ownership ratio second (as will be shown) only to that recorded by Connecticut.

Size of the state is emphasized by the fact that its 7 airports give it 7 per 1,000 sq. mi., a density exceeded only by New Jersey. Additionally, Narragansett Bay, with its many well protected harbors and thickly populated shoreline, deserves consideration for water-based operations.

Connecticut's 488,682 families make up 1.4 percent of the national total, but the state has 2.20 percent of the buying income and accounts for almost exactly the same proportion of retail sales. As just indicated, it exceeds Rhode Island with its high ratio of automobile ownership, the total for the state standing at 405,904, or 91 per hundred families.

As for registered aircraft Connecticut has 251, or 1.1 percent, thus ranking second only to Massachusetts among the New England states in this respect. In the matter of airports it also compares well, for its 25 ports—0.9 percent—give it 5.1 ports per 1,000 sq. mi. Many small-boat harbors along its Long Island Sound shoreline are well adapted to water-based operations.

Accordingly, the airplane puts the entire state well within comfortable commuting distance to either New York or Boston. Recently a state commission published a booklet making a bid for post-war aviation development, stressing the availability of landing facilities and outlining future projects. However, one important factor must be carefully weighed in considering Connecticut as a market area: Statutes now on its books covering personal flying are among the most stringent in the nation.

Compilation of the measurable market criteria puts Connecticut in Class C, its individual rating among the states being 22nd.

Analysis of the data for the six states gives these guides for the New England Region:

Measured strictly on the basis of market criteria, however, Maine is ranked in Class E as an aviation merchandising area, standing in 42nd place among the 48 states.

New Hampshire, with a family population of 132, 936, or 0.4 percent of the U. S. total, has 0.32 percent of the buying income and does 0.38 percent of the retail sales. With 97,508 passenger cars owned within the state, it falls in the 73 cars-per-100-families bracket.

With but 87 aircraft registered, New Hampshire's percentage of the U.S. total stood at 0.4 percent, and non-airline pilots registered at the same time totaled 365. The state's 15 airports (1.66 per 1,000 sq. mi.) comprise 0.5 percent of those throughout the United States, but it has a goodly number of usable lakes which have long been popular for summer vacations. Deterring factors to increased use of aircraft on a year-round basis are the severe winters and the mountainous terrain found in a large part of the state.

On the basis of presently measurable market criteria alone, New Hampshire is gaged as a Class E aviation product market, standing in 45th place among the states.

Neighboring Vermont, with a family population of 92,435, or 0.2 percent of the national total, accounts for 0.25 percent of the buying income and 0.30 percent of the retail sales. Following in much the same ratio is automobile ownership, summing up to a total of 67,971 passenger cars.

This state's 67 aircraft comprise 0.3 percent of all those registered in the U. S., and 293 non-airline pilots were registered in New Hampshire. With 12 airports available, the state has 1.29 per 1,000 sq. mi., but there are a better-than-average number of water bodies for amphibious or float plane operations.

Here again, however, rugged terrain, which tends to bisect the state in a north-south direction, and severe winter weather both serve as deterrents to sizable expansion of personal flying in the immediate future. As in the case of New Hampshire, the limiting factors in the measurable data make Vermont a Class E market, standing at 48th in importance in the country.

Massachusetts is the highest ranking state of the New England region, being rated as a Class A aviation product market, and ninth most important in the country. It has 3.2 percent of the nation's family population, a total of 1,120,694 accounting for 4.12 percent of the buying income and 3.95 percent of the retail sales. Its automobile ownership, which amounts to 766,929, is more than twice that of Maine, New Hmapshire, and Vermont combined.

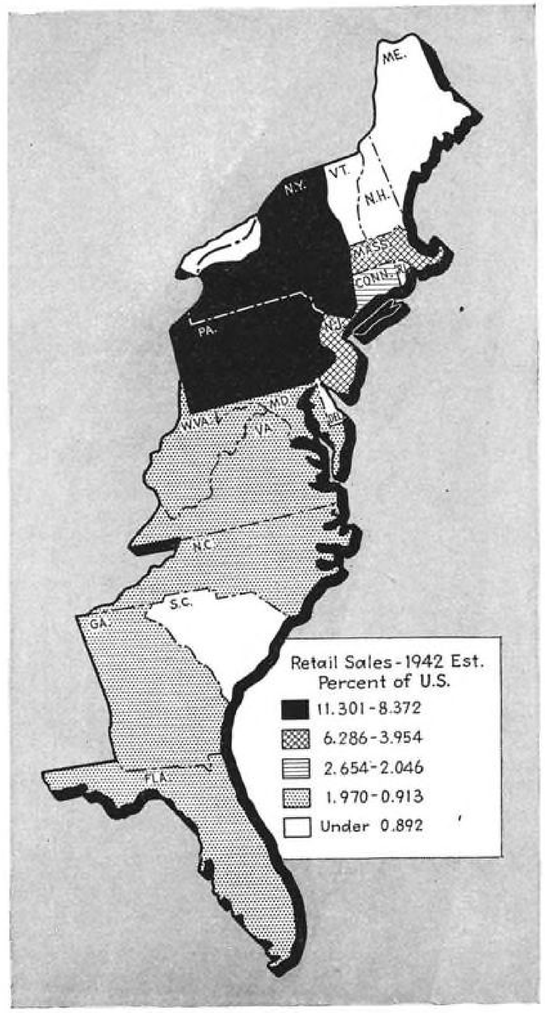

Percentages of retail sales performance by various eastern states are shown here. Note close correlation of this criteria with data illustrated in other maps. These factors help give three Middle Atlantic states of New York, New Jersey, and Pennsylvania No. 1 rank among nine marketing regions in U. S., with New England standing seventh and South Atlantic fourth in importance.

A family population totaling 2,201,421 means this area has 6.3 percent of the families of the country representing 8.27 percent of the buying income and accounting for 8.38 percent of the retail sales. Ownership of 1,639,248 passenger autos shows that an average of 75 cars are owned per hundred families. The vast majority of these cars are concentrated in Massachusetts and Connecticut.

A total of 1,303, or 5.7 percent, aircraft were registered in New England, and 4,445 non-airline pilots lived there. The region's 139 airports comprised 4.8 percent of the national total.

On a weighted basis, the New England Region shapes up as the seventh most important of the country's nine regions.

South Atlantic

Moving below the Mason-Dixon Line into the South Atlantic states of Delaware, Maryland, Virginia, West Virginia, North and South Carolina, Georgia, and Florida, we find different problems of aviation product distribution. Greater areas must be covered to reach the same number of prospects but, by the same token, transportation needs are coming to favor the airplane. The terrain differs from that just considered, with the percentage of hilly or mountainous territory decreasing. The means of livelihood shows a basic change, from predominantly industrial to agricultural.

An exception to the generalization about distances being greater is afforded by Delaware, which in area is second smallest state in the union. With less than half the family population — 70,541 — recorded by Rhode Island (the one smaller state), Delaware has 0.2 percent of the family population and accounts for, respectively, 0.28 and 0.34 percent of the buying income and retail sales. And, with 57,009 passenger cars, Delaware again has less than half the number in the one smaller state.

On straight aviation indices it is also under Rhode Island, though not by so great a margin; for its 127 aircraft give it 0.6 percent of those in the country, and 249 non-airline pilots are registered there. Ten airports give the state 5.05 per 1,000 sq. mi.

Standing at 47th place among the states, Delaware measures out as a Class E market.

The adjacent state of Maryland has 465,683 families making up 1.3 percent of the U. S. total, and the figures for its percentage of buying income and retail sales are exactly the same, 1.97. With 328,700 passenger cars, Maryland is well above average for the region in the auto category.

In any market evaluation, the District of Columbia (whose area comes out of Maryland) must be considered either as a potential distributor-dealer location, or as a source of prospects for an outlet nearby. Wartime data on the D. of C.'s population, income, and retail sales would give an inaccurate picture, but on aviation these criteria give clues: According to reports on the last peacetime registration, the District had 287 registered aircraft, compared with 344 for the entire state of Maryland, and Washington's non-airline pilots (probably including CAA inspectors) totaled 728, against 1,053 in Maryland.

However, here is an important fact which must be kept in mind: If, as has been proposed in New York, the air space for 10 mi. around the major airline terminal is reserved for transport operations, there'll be little or no private flying in the District.

Measured entirely apart from the District of Columbia, Maryland is a Class C market, ranking 23rd among the 48 states.

Larger in area, and with consequent greater transportation needs, as is shown by 375,474 automobile registrations, is Virginia. Family population of 627,532 gives the state 1.8 percent of the country's total, but buying income and retail sales ratios are lower, both standing at 1.56 percent. Aviation criteria include the following: 1,410 pilots; 381, or 1.2 percent, aircraft; and 54 airports, or 1.35 per 1,000 sq. mi. It should be noted that the majority of airports are east and south of Appalachians (which parallel the northwest border of the state) and follow the more densely populated areas, being generally close to facilities for waterbased operations. Ranking 21st among the states, Virginia is a Class C market.

West Virginia, recording 1.5 percent of the family population with its total of 444,815, has 0.91 percent of the buying income, accounts for 0.93 percent of the retail sales, and owns 219,075 passenger autos. Latest compilations show the state had 966 non-airline pilots and 197, or 0.8 percent, of the aircraft. The 28 airports (1.16 per 1,000 sq. mi.) are mostly north and west of the Appalachians. The measurable data make West Virginia a Class D market, and on a weighted basis it ranks in 32nd place.

Though North Carolina is geographically larger than South Carolina and has a greater family population (789,659 compared with the latter's 434,968) the market ratings of the two are much closer, being Class B an C, respectively. Their respective state rankings on a weighted basis are 16th and 29th. Where North Carolina has 1.53 percent of the national buying income, South Carolina has .76 percent; where North C. does 1.59 percent of the retail sales, South C. does .89. With 463 aircraft, North's percentage is 1.9 against 214 and 0.9 percent for South.

On the matter of pilots, however, the difference is cut down, for North Carolina had 1,319 non-airline pilots registered and South Carolina had 975. And in flying facilities, too, the difference is smaller than state sizes would indicate, for where North Carolina has 58 airports, or 1.18 per sq. mi., South Carolina has a total of 44, or 1.43 per sq. mi.

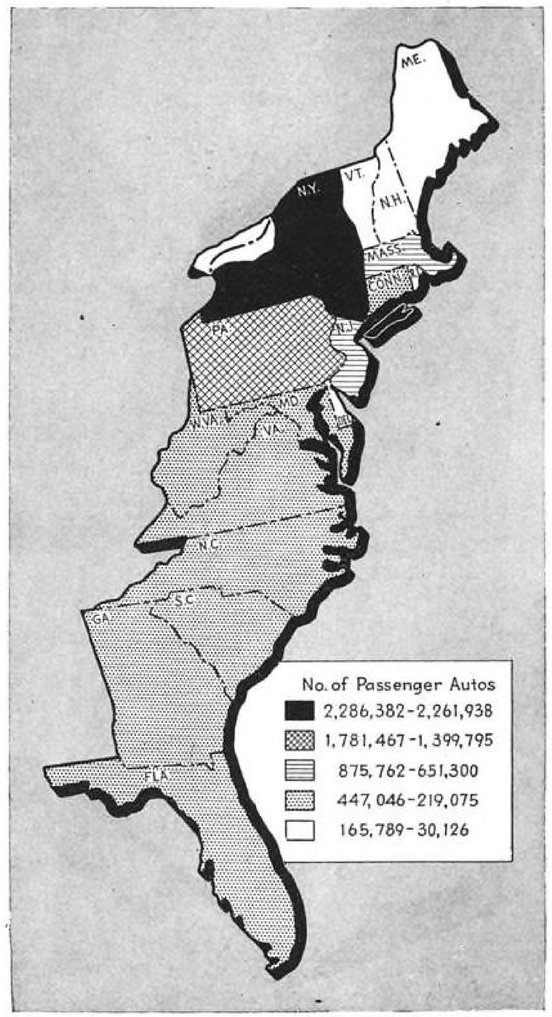

Clue to transportation needs and habits as a guide in establishing aviation product market areas is shown by passenger automobile ownership. New York's heavy population, of course, accounts in large measure for its lead in this respect. It is interesting to note consistency of auto ownership in eight South Atlantic states, averaging 57 cars per 100 families.

Georgia's 752,241 family population is equivalent to 2.2 percent of the American total, a predominantly rural group with 1.26 percent of the buying income, doing 1.42 percent of the retail sales, and owning 375,002 passenger autos. Aviation indices point to ready acceptance of flying, for 1,453 pilots were registered and the 339 aircraft comprised 1.4 percent of the nation's total. The 67 airports, equal to 1.15 per 1,000 sq. mi., are distributed about as even, geographically, as they could be. On the basis of measurable data, Georgia is the third of the South Atlantic Region's Class B markets, and its individual state rating weighs out at 18th place.

Florida, recording an unusually large "invasion" by money-laden tourists last winter, might best, for the sake of conservatism, be considered the exception rather than the rule; changing economic conditions might well mark a long lapse in such treks. Measured by a pre-boom criteria, the state stacks up as a Class B market area, ranking in 12th place on a state-by-state basis; for a family population of 519,987 puts it at 1.6 percent of the U. S. total and buying income and retail sales ratios are at 1.17 and 1.31 percent, respectively.

However, with 2,135 pilots and 528 registered aircraft, Florida led all seven of the other South Atlantic states as it also did with 145 airports, or 2.67 per 1,000 sq. mi.

Other important aviation criteria make Florida a state to watch carefully in formulating distribution plans. Since "it's a fer piece from anywhere to anywhere else" and weather conditions are generally as advertised, the airplane becomes an ideal transportation medium. The concentration of military flight training should have a double-barreled benefit; a network of landing fields (which may or may not be available for private flyers) has been built up, and the people who live in, and have visited Florida are used to seeing planes in the air. These people have been educated to the fact, perhaps subconsciously, that airplanes really fly. And if, as has been hopefully suggested, travel between the United States and Latin America increases to undreamed-of proportions, it must be remembered that Miami is the largest aviation port of entry for travelers headed South.

If Florida continues as the popular winter vacation land, there will be a corresponding effect upon seasonal operations, perhaps enough to be a dominant factor in selecting distribution locations.

As shown in Table III, the eight South Atlantic states' family population totals 4,278,771, or 12.3 percent of the national total, accounting for 9.25 percent of the buying income and a shade over 10 percent of the retail sales, and automobile ownership amounts to 2,428,118, or an average of 57 passenger cars per hundred families. With 2,872 planes, these states have 10.5 percent of the nation's registrations, and totals for non-airline pilots and airports stand at 9,560 and 426, respectively Based on a compilation of the data, the South Atlantic Region is the fourth most important market in the nation.

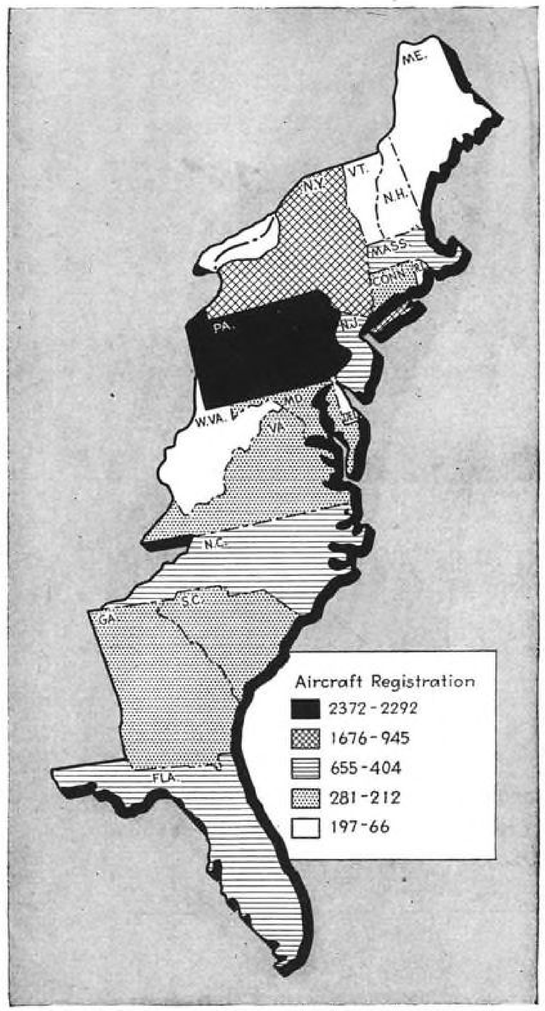

Index of aircraft registration finds Pennsylvania leading nation, for it had, on latest date for which information is available, 2,372 registered aircraft, topping second-place California's 2,292. Although three eastern marketing regions cover all five brackets for this criteria, there is still pretty consistent correlation with other marketing indices. Actual totals or percentages are shown in Tables I, II and III.

Table III—South Atlantic Region

	Delaware	*Maryland*	*Virginia*	*West Virginia*	*North Carolina*	*South Carolina*	*Georgia*	*Florida*	*Total*
1. Family pop.	70,541	465,683	627,532	444,815	789,659	434,968	752,241	519,887	4,278,771
2. Percent Nat'l pop.	2.	1.3	1.8	1.5	2.3	1.4	2.2	1.6	12.3
3. Percent U. S. buying income	.28	1.97	1.56	.91	1.53	.76	1.26	1.17	9.24
4. Percent U. S. retail sales	.34	1.97	1.56	.93	1.59	.89	1.42	1.31	10.01
5. No. passenger cars	57,009	328,700	375,474	219,075	447,046	246,321	375,002	379,491	2,428,118
6. No. cars per 100 families	82	71	60	49	56	56	50	73	57
7. No. aircraft registered	127	344*	381	197	463	214	339	528	2,872
8. Percent aircraft registered	.6	1.5	1.2	.8	1.9	.9	1.4	2.2	10.5
9. No. pilots	249	1,053**	1,410	966	1,319	975	1,453	2,135	9,560
10. No. airports	10	20	20	54	28	58	44	67	426
11. Airports per 1,000 sq. mi.	5.05	2.02	1.35	1.16	1.18	1.43	1.15	2.67	.....
12. Percent airports	.3	.6	1.8	1.0	1.9	1.5	2.4	4.9	14.4
13. State market rating	E	C	C	D	B	C	B	B	.....
14. Regional market rating	.....	.....	.....	.....	.....	.....	.....	.....	Fourth

*Exclusive of 287 in District of Columbia.
**Exclusive of 728 in District of Columbia

• Next month's article (Part II) will analyze the East North Central, East South Central, West North Central and West South Central regions. The concluding article (Part III), in addition to Mountain and Pacific Region analyses, will present a summary giving an over-all picture for the entire country, including a double-page map showing logical locations for major distribution points.

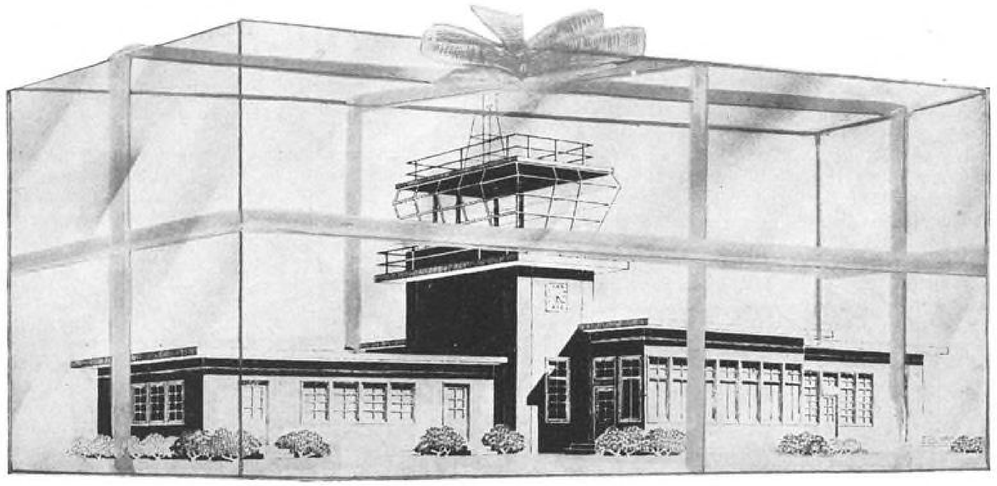

NOW . . . "PACKAGED" AIRPORTS

By J. L. deCUBAS, *Westinghouse Electric International Co.*

Everything from beacons and generators to terminal buildings—for tropic, temperate, or arctic service—is included in Westinghouse International's new engineered units . . . . Almost infinite number of combinations, to erect any type airport, can be supplied—and shipped by air if desired.

BOTH STUDIED FORECASTS and visionary predictions of commercial aviation's growth too often overlook one important axiom: That air transportation can develop only as far and as fast as adequate airports are available.

It is true that many countries have excellent systems of trunk line landing and service facilities, and the war has brought into being a worldwide network of military bases that may well have peacetime commercial utility for international trunk lines. But, in any realistic appraisal of air transport's usefulness, it must be said that any system will be only as good as its secondary and feeder airport facilities.

Trunk lines are undoubtedly the backbone of air transportation, but feeder operations—like the veins in the human body—are essential if air transport is to fully meet the economic needs of this or any other country. For air transportation to reach its full growth, a great number of new airports will have to be established, many of them in remote or hitherto inaccessible regions.

To meet the need for adequate, but at the same time economical, airports, Westinghouse Electric International Co. has developed "packaged airport equipment"—engineered and equipped units ready for shipping, by air if necessary, to any point in the world where landing and service facilities may be desired. It should be pointed out that no recommendations are made in our study on runway location, clearing, grading, drainage, etc., for these depend on land configuration, soil characteristics, availability of materials and labor, and other local factors.

In developing the packaged airport equipment, our engineers studied air transport requirements on a world-wide basis, finding that, irrespective of location or importance, every airport should have a minimum of equipment including radio communication, avigation aids, a source of electric energy, gasoline storage and pumping units, field lighting equipment, an administration building and, though not always essential but recommended, hangar facilities.

Moreover, depending upon local conditions and the size and functions of the airport, useful equipment may include the following: Water pumps and purification material, a sewage system, warehouses, living quarters, repair shops, and various services for handling traffic.

The requirements were studied on a functional basis in which the common elements were broken down into assemblies, each applying to some function or service of the airport. To provide the economies of standardization, yet give the greatest possible flexibility to meet climatic, geographic, and economic conditions, a total of 208 assemblies were developed. These, in turn, were consolidated into 41 "assembly sheets," each of which contains:

1. An identification code number.
2. Plans and schematic drawings of equipment and materials.
3. A list of items making up assembly.
4. General specifications and technical characteristics of materials and equipment.
5. Electrical connected load of electrical apparatus and water consumption data of different services.
6. Shipping weight of materials and equipment.

Meanwhile, equipment and materials for the airports have been grouped functionally as follows:

1. Generating and distribution equipment of various types and capacities: 29 assemblies, 4 assembly sheets.
2. Communication equipment and radio avigation devices: 16 assemblies, 3 assembly sheets.
3. Airport lighting equipment: 60 assemblies, 11 assembly sheets.
4. Meteorological equipment: 3 assemblies, 1 assembly sheet.
5. Miscellaneous field units: 6 assemblies, 1 assembly sheet.
6. Gasoline storage and fueling equipment: 6 assemblies, 1 assembly sheet.
7. Water storage, distribution and purification equipment: 7 assemblies, 2 assembly sheets.
8. Fire-fighting equipment: 4 assemblies, 1 assembly sheet.
9. Sewage disposal systems: 4 assemblies, 1 assembly sheet.
10. Buildings: 73 assemblies, 16 assembly sheets.

These standard assemblies can be applied to a specific airport plan, or to an airport layout identifiable with a specific problem, thus the selection of appropriate equipment will be a simple matter. A list of items which may be needed to set up a complete airport are shown in the accompanying Table I.

The contents of these assembly sheets are illustrated by assemblies covering the electrical generating and distribution equipment. In this equipment, for example, four capacities—50, 75, 100 and 150 kw.—are available, with an extra unit as standby to insure continuous service. The assembly sheet for this equipment includes a general description, specifications, and a general bill of materials which give all information from nominal capacity through necessary accessories to shipping weight. Even plan and three-view drawings showing proper installations are provided.

Considerable thought has been given to the electric system, for to operate efficiently and uninterruptedly, any airport must have a dependably maintained source of electrical energy and a rugged electrical distribution system. Primarily, every modern airport functions by the grace of electricity.

A thorough study of many installations, with due consideration of day and night factors and normal load diversity factors, has revealed that the average electrical load of the great majority of secondary airports will vary between 50 and 150 kw.

Two general types of electrical distribution systems are recommended: One for ports with a total average load up to 75 kw., with 3-phase, 4-wire low-voltage systems; and one for airports with total average load of over 75 kw., with 3-phase, 3-wire, 2,400-v. primary-distribution system.

The generating assemblies used when electrical power is not available at the site of the airfield are based upon use of Diesel engine-generator units, since the fuel oil can be shipped to the fields in connection with gasoline for refueling aircraft. Moreover, Diesels are relatively light in weight, are rugged, and are easy to install and operate.

As part of the general description, detailed information is also provided for every other necessary item, from plumbing to complete hangars—for any or all of the items might be necessary, depending on location. A complete airport opening up new mining territory, for instance, might need everything on the list.

But for an airport located near electric power facilities the assemblies calling for generating equipment would be dropped and the one setting up a simple substation would be used. Naturally many of the items required for an airport are not of Westinghouse manufacture, but we are in touch with outstanding producers of such equipment so that the best of each type can be made available at the greatest possible economy consistent with quality.

In many cases climatic or geographic conditions will not affect efficiency of electric generating and distributing units, radio communications, airport lighting and meteorological equipment, mobile field units, fire-fighting units, gasoline fueling systems, and other such assemblies. So these are well standardized. However, where climate or geography would affect operations, specialized equipment is specified.

Among the buildings, four types of hangars are provided, ranging from a simple nose type to one "designed to provide shelter, storage, and repair facilities for airplanes up to a wing spread of 160 ft. and an over-all length of 200 ft."

Table I—Items to be Included in Westinghouse Packaged Airport Equipment

General descriptions, specifications, bills of materials, plans and installation drawings are provided for each assembly

- Electrical generating equipment (4 capacities)
- Electrical substations (4 capacities)
- Distribution pole assemblies (High and low voltage)
- Transformer bank assemblies (5 to 150 Kva.)
- Runway contact lighting systems (1 to 4 runways of 2,000 to 12,000 ft. lengths)
- Boundary lighting assemblies
- Beacon tower assemblies (51 to 108 ft. high)
- Field floodlight assemblies (1 to 4 runways)
- Lighting control and signal assemblies
- Miscellaneous airport lighting equipment
- Radio transmitter and receivers
- Telephone equipment
- Public address systems
- Meteorological equipment
- Mobile field units (portable floodlights, crash trucks, fueling units, station wagon, snow plow)
- Gasoline fueling systems (20 to 200 gal. per min. pumping capacities)
- Water pumping, distribution and purification systems. (For 16 to 200 people.)
- Fire fighting equipment
- Sewage disposal systems
- Pre-fabricated hangars (four types)
- Machine tool equipment
- Terminal buildings (four basic types, five variations of each)
- Pre-fabricated power houses (10 variations)
- Pump houses (5 variations)
- Transmitter buildings (5 variations)
- Pre-fabricated warehouse buildings (7 variations)
- Pre-fabricated barracks buildings (5 variations)
- Pre-fabricated guest house buildings (5 variations)
- Pre-fabricated garage buildings (5 variations)

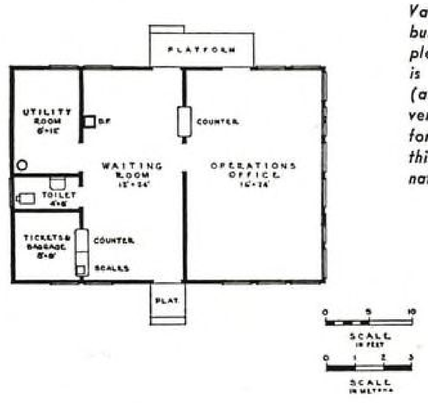

Variations to suit every condition are provided by four basic types of terminal buildings in Westinghouse International's new packaged airport equipment. Simplest type (left) is illustrated both in perspective and plan; example shown here is sloping roof variation for temperate climate operation. Next largest unit (above, right) has living quarters added to smallest unit. Shown here is arctic version. Third largest (below), depicted here in tropical version, is designed for uninterrupted traffic flow. Largest unit (shown in "package" in title-head of this article) is developed from third largest unit and is designed to handle international passenger and freight traffic through population centers up to 100,000.

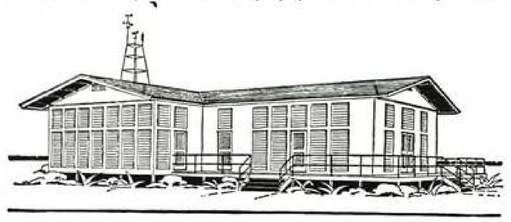

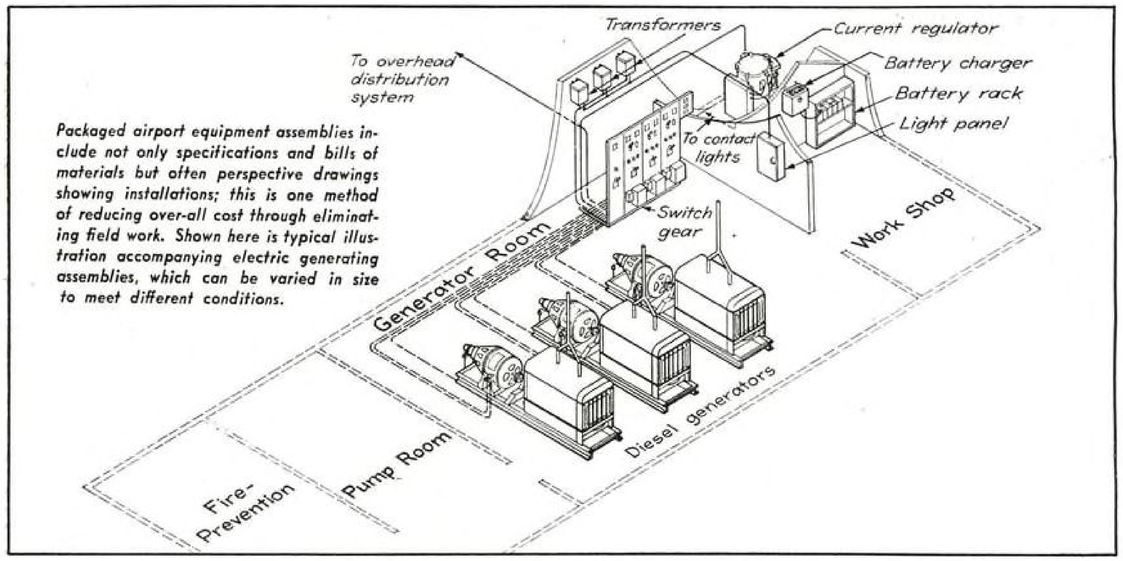

Packaged airport equipment assemblies include not only specifications and bills of materials but often perspective drawings showing installations; this is one method of reducing over-all cost through eliminating field work. Shown here is typical illustration accompanying electric generating assemblies, which can be varied in size to meet different conditions.

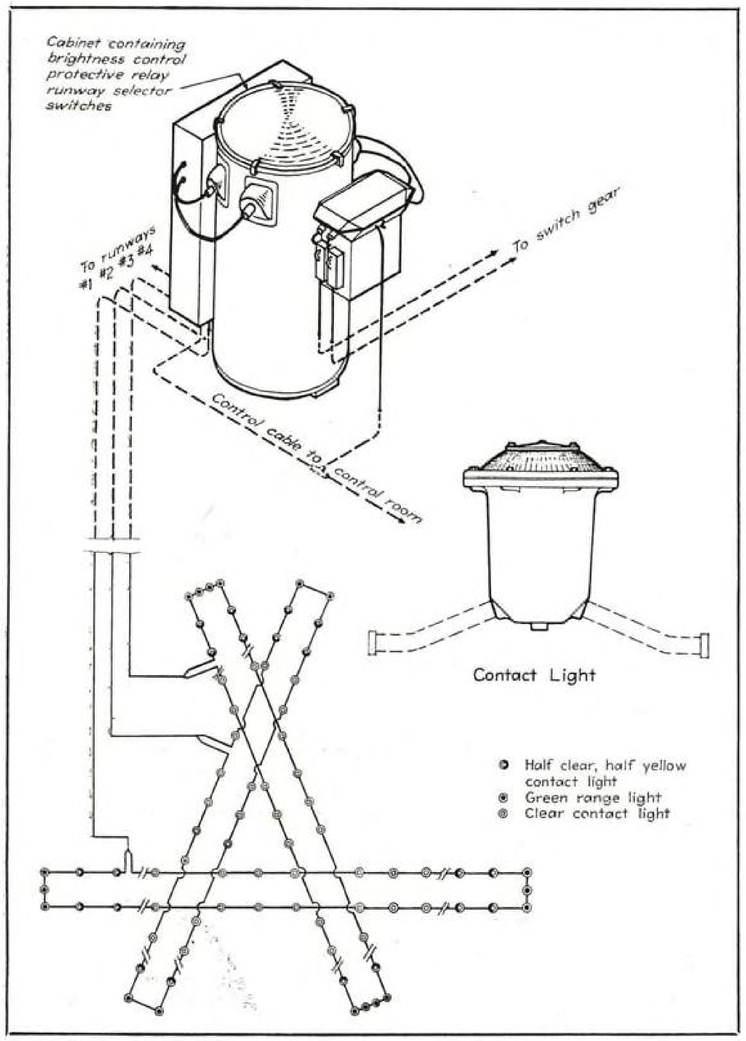

"Everything but the runways" is included in packaged airport equipment. Typical of details designed to simplify planning and installation work is this illustration of runway contact lighting. Assemblies are so arranged that equipment for any number of runways of any length may be "ordered by number."

This latter hangar can also house a machine shop, with two tool assemblies available, one with which "all but major airplane repairs may be effectively undertaken, the other with which general maintenance repair can be speedily carried out." A total of 20 terminal buildings are available—five variations for each of the four basic sizes. The smallest, or Type A terminal buildings, for instance, can be had with either flat or sloping roof and designed for temperate, tropical, or arctic climate. Consisting basically of an operations room housing radio, airport lighting control and meteorological equipment, and a passenger waiting room, Type A buildings are designed for very small feeder airports, private flying fields, hotels or resorts, meteorological stations, or remote operations such as lumber, mining, or oil developments.

The Type B terminal building is essentially a Type A structure with the addition of a wing for living quarters, consisting of two bedrooms, a living room, kitchen, and sanitary facilities. Like the Type A, from which it is developed, the Type B buildings are also suitable for remote localities, mining, lumbering or oil operations, military or trading posts, hotels and resorts, and shuttle services.

Type C buildings, for handling both freight and some passenger traffic, consist of a large lobby with related passenger services and an operations room. Like the other types, these buildings can be had with either flat or sloping roof for the three types of climatic conditions.

(*Turn to page* 253)

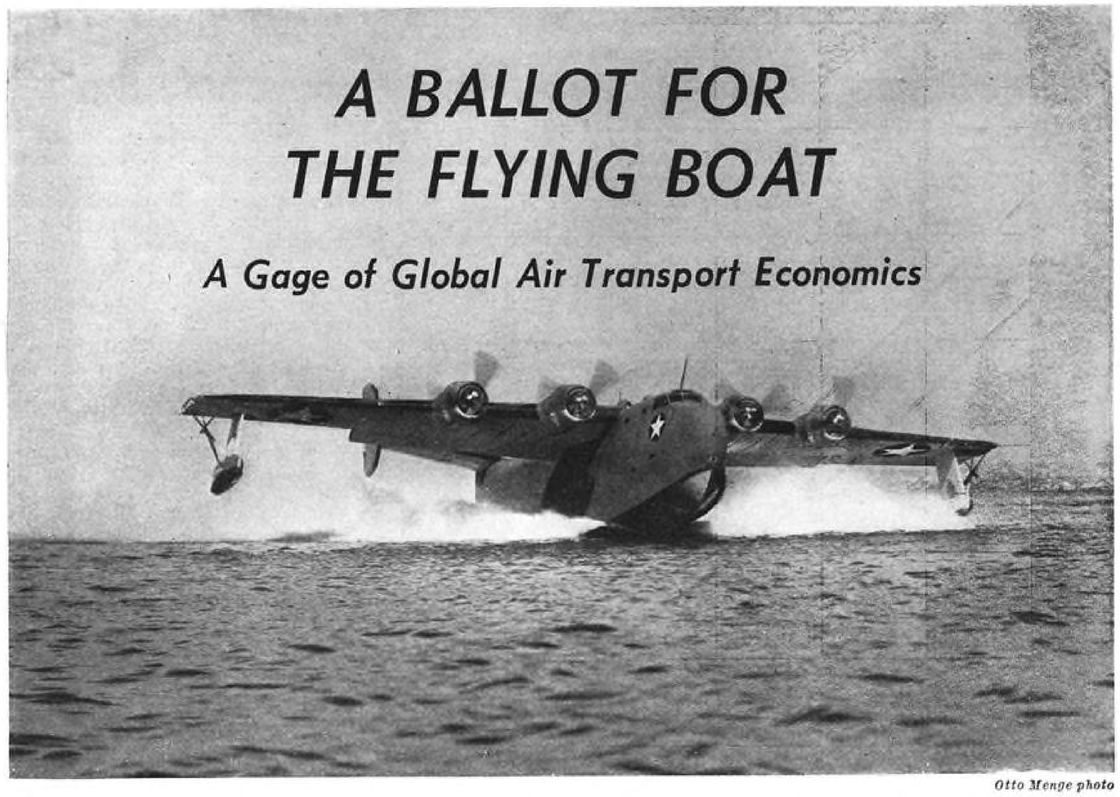

Otto Menge photo

A BALLOT FOR THE FLYING BOAT

A Gage of Global Air Transport Economics

By CAPT. C. H. SCHILDHAUER, USNR

*Assistant Director for Plans and Logistics, Naval Air Transport Service**

Comparing speed, fuel-cargo ratios, ton-mile figures, terminal costs, maintenance, and other factors, the author contends that the flying boat boasts advantages over the land plane in the coming race for low cost international air transport.

As AIR TRANSPORTATION comes of age, the controversy of land planes vs. flying boats for international operation promises to become one of the classic arguments of the postwar air world. And, as in the controversy of air-cooled vs. liquid-cooled engines, it begins to be apparent that this matter of contention will end in the realization that there is a continuing need for *both* types—that neither should be developed to the exclusion of the other.

Within the past decade and particularly during our war years, the landplane has been developed at a rapid pace. Backed by alert domestic airlines, Pearl Harbor found it in the fortunate position of being the one type of aircraft we were technically prepared to produce, particularly as a transport plane (there was no *transport* flying boat in production). The press of war dictated that it be given greater size and range for over-ocean flying.

Then once it was proven that land planes were safe for over-water travel, many members of the air industry accepted the "gospel" that the flying boat was out of the picture, not even bothering to investigate the situation. Such an attitude neglects consideration of the economics which, although submerged by the expediencies in pursuit of war, must inevitably come to the surface when peace is won and a cost-conscious industry takes the reins.

When the war is finally over, our air industry is going to be up to its neck in a complex competitive struggle for global business. In order that any airline may hold its own in the principal world markets for air transportation, equipment with a low operating cost will be a primary requisite. In the last analysis the type of equipment which will be used for any given operations will be determined by the dollar bill.

The most important factor is a fair comparison between the land plane and flying boat gaging their relative operating *cost per ton-mile*. In a struggle (the current war) where cost means nothing and speed means all, this element is widely neglected by land plane advocates. Related arguments (and ones of which land plane advocates have made much) are their comparative speed, terminal costs, and maintenance. We will present an analysis covering these factors, followed by an economic evaluation of a large high-altitude land plane and a large flying boat, both designed to meet the structural and performance requirements of government airworthiness regulations.

In the matter of *speed:* The aerodynamicist who says that the speed advantage of the large land plane over the flying boat will eliminate the latter from serious competition is (a) not a very good aerodynamicist, (b) unaware of the characteristics of the large flying boat, or (c) selling land planes. In the first place, the flying boat, in this regard, tends to improve steadily with size, to the extent that already at 160,000 lb., gross weight the flying boat will have a speed only 4 percent lower than that of a land plane of the same wing and power loading.

Under these circumstances one might ask if there will be many postwar travelers between, for example, New York and London, who will be willing to pay an "extra fare" just to get there 30

* Opinions expressed herein do not necessarily reflect the views of the Navy Department.

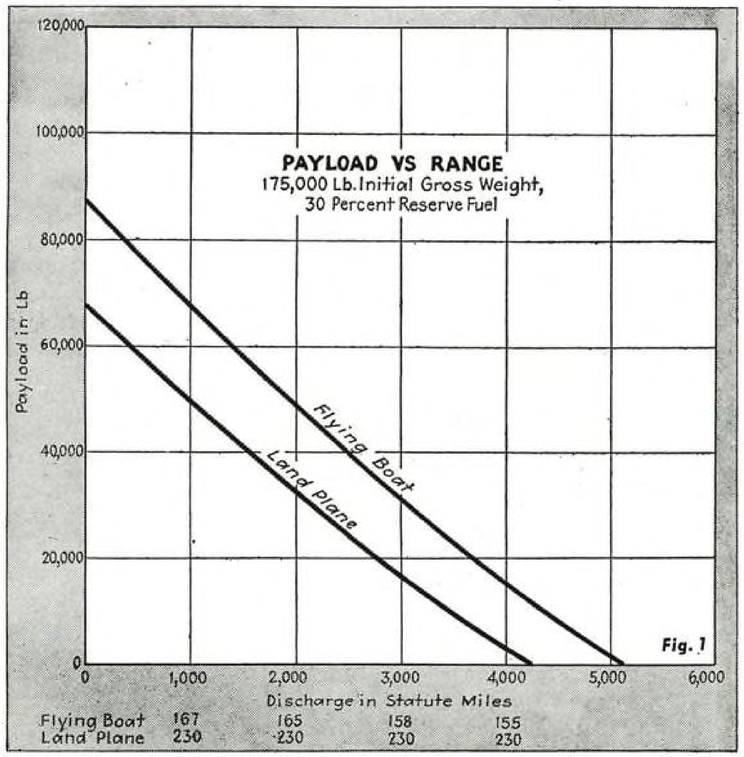

Fig. 1

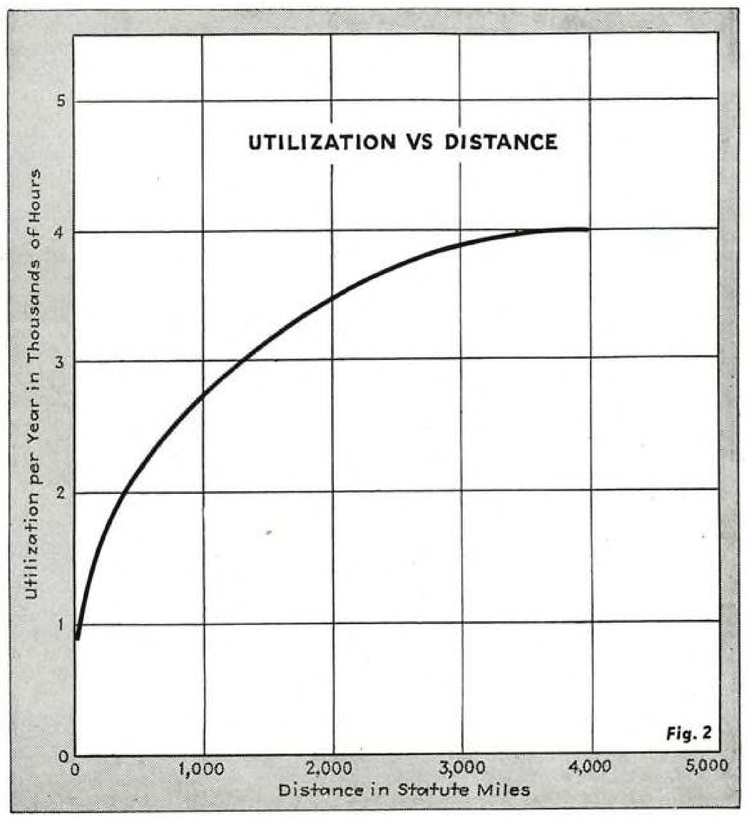

Fig. 2

min. sooner. In the second place, very high speed, whether offered in a land plane or a flying boat, is excessively expensive—speed in both types, where the cost of travel is important, must be subordinated to the load carried.

In regard to *terminal costs:* Those who have pointed out the extreme handling costs of the flying boat at terminals as a disadvantage have apparently overlooked the enormous expense of building and maintaining airports which can handle large land planes. Eventually both the airport first cost and its maintenance must be met, probably through some form of landing fees. For the cost of one of these superlandfields ($50,000,000 is an average figure), a great number of base facilities for flying boats can be built and maintained on the available natural water landing areas.

The handling of flying boats in current operations is handicapped by methods and equipment which are both inadequate and obsolete. Improvements in flying boat handling technique—still in an experimental status, although ready for development and subsequent use—indicate that the flying boat of the future will be handled with as little terminal time and manpower as the land plane.

As for *maintenance:* The problem of corrosion maintenance, which formerly engendered much disfavor for the flying boat, is now equalled, and probably exceeded, by the problems related with land plane's retractable landing gear and its complicated housing mechanism. Present designs indicate that large flying boats can be maintained with at least as much ease as equally large land planes.

Economic Evaluation

In arriving at the comparative cost-per-ton-mile of the flying boat and the land plane, three evaluations are made: 1. Performance, 2. utilization, and 3. comparison computation. Cost is a most representative yardstick, because most of the other common factors, such as fuel-cargo ratio, ton-miles-per-hour, etc., are evaluated while working through a cost analysis.

1. Performance. This is the "data required" step—the characteristics of each type together with:

A. Payload-vs.-range curve.

B. Average cruising speed for range.

Our Fig. 1 shows payload-vs.-range data plotted for two representative post-war commercial airplanes—for use in long range international operations, the large supercharged-cabin high-altitude land plane and the large flying boat, of the same gross weight. The cruising condition for each is that which will be used in operation for best all-around economy. The accuracy of these curves controls the accuracy of the result, and they must therefore be so drawn as to be acceptable to the person using the analysis. Most of the diverse ramifications of assumptions, such as optimum altitude and air speed, crew and equipment requirements, and cruising power, are removed from the computation proper.

2. Utilization. This step, summarized in Fig. 2, employs an arbitrary curve showing the increase in utilization with increasing flight lengths. It is a device which removes many troublesome variables from the computation—such as block speed vs. airspeed, handling time, etc.

3. Comparison Computation. The computation of direct flying costs is usually complicated by extravagant attempts toward accuracy. The following four short formulas present a clear, yet faithful, comparison of direct flying costs:

A. Fuel and oil

$$C_m = 3.1f$$

Where C_m = cost per mile, cents.
f = fuel and oil consumption, lb./mile (determined from payload curve).

This assumes a fuel cost of 17c. per gal. and oil cost of 50c. per gal., with fuel/oil ratio of 20:1, giving a resulting figure of 18.6c. per gal., or 3.1c. per lb.

B. Airplane depreciation.

$$C_m = \frac{C_a}{8\,U\,V}$$

Where C_a = cost of complete airplane.
V = true airspeed, mph.
U = utilization, hr./yr.

The constant, 8, assumes 8-yr. depreciation with no salvage value.

Cost of engines is included with that of the airplane; although engines will probably be surveyed before the end of the 8-yr. period, the cost of replacement will be handled as overhaul material..

C. Maintenance and servicing.

$$C_m = \frac{2.5\,W \times 275}{V}$$

Where W = weight of airplane empty (with engines) in tons.

Maintenance and servicing costs are the largest and most troublesome ones that the performance engineer is called upon to compute. The enormous variation shown by these costs in different operations has resulted in literally pages of formulas which attempt to reduce them to explicable denominators. Careful investigation, however, invariably reveals that the reason for this variation does not lie in incorrectly balanced formulas but instead actually begins right on the hangar floor where the aircraft are maintained. A survey of a number of widely different operations indicates that an aircraft in cargo transport operation can be maintained by approximately 2.5 man-hours per flying hour for each ton of weight empty.

The cost of the average man-hour ($2.75) was likewise obtained from a number of different operations. It is broken down as follows:

Material	$ .25
Labor	1.25
Overhead	1.25
	$2.75

Cost of overhaul of various components was not considered separately because there will be little difference for the land plane and flying boat, also because the proportion of such costs to the total is too small to warrant such treatment, particularly in view of the need for the simplification discussed above. Overhaul of an engine, for example, requires approximately 400 man-hours, and it must be performed at approximately 700-hr. intervals. So for a four-engine aircraft:

$$\frac{4 \times 400}{700} = 2.3 \text{ man-hours per flying hour.}$$

D. Crew pay cost.

$$C_m = \frac{P_1+P_2+P_3 \ \ldots\ldots \text{etc.} \times 100}{91.5V}$$

Where P_1P_2, etc., are monthly salaries (dollars) of the crew members, based upon the following arbitrary figures:

Plane commander	$800
First officer	600
Second officer	500
First engineer	450
Second engineer	300
First avigator	400
Second avigator	300
First radio operator	350
Second radio operator	250
First steward	200
Second steward	150

Both large land planes and flying boats offering comparable passenger service and safety, and meeting Civil Aeronautics Administration requirements, will undoubtedly require a crew similar in number and type to the above. The 91.5 hr. per month is based upon a crew utilization of 1,100 hr. per year.

Miscellaneous individual items, such as crew expenses, interest on investment, insurance, and several like items, are not considered as such; however, the sum of these items will approximate 10 percent of the final cost, and the sum of other costs should be increased by the amount. Thus, total direct cost per ton-mile is:

$$C_m = 1.1\,C_m\text{. (fuel and oil)} + C_m\text{ (deprec.)} + \frac{C_m\text{ (maint.)} + C_m\text{ (crew pay)}}{L}$$

(*Turn to page 263*)

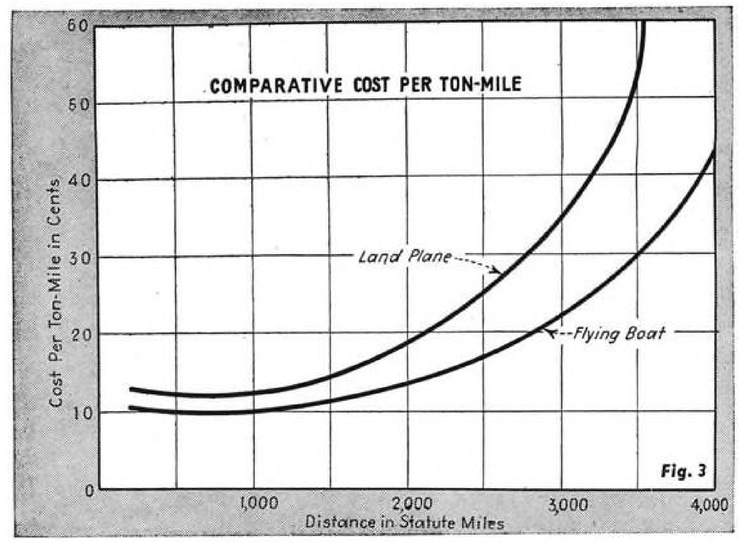

Fig. 3

Table I—Characteristics and Performance

	LAND PLANE Supercharged high altitude	FLYING BOAT
Gross weight	175,000 lb.	175,000 lb.
Basic weight	106,900 lb.	86,350 lb.
Fuel, oil, and cargo	68,100 lb.	88,650 lb.
Fuel, oil cargo/gross weight	38 percent	49.5 percent
Engines	4 x 3,000 hp. Turbo	4 x 3,000 hp. 1 Stage
Wing area, sq. ft.	3,430	3,900
Wing loading, lb/sq. ft.	51	45
Vel. max., sea level	256 mph.	218 mph.
Rate of climb at sea level	720 ft./min.	625 ft./min.
Operating altitude	25,000 Ft.	10,000 Ft.
Cost at $18.00 per lb.	$1,925,000	$1,550,000

Performance (for maximum range condition plus 30% reserve fuel)

Range—1,000 Mi.	Land Plane	Flying Boat
Payload (lb.)	49,500	67,500
Time (hr.)	4.4	6.0
Average speed (mph.)	230	167
Altitude (ft.)	25,000	10,000
Range—2,000 Mi.		
Payload (lb.)	32,000	48,650
Time (hr.)	8.8	12.1
Average speed (mph.)	230	165
Altitude (ft.)	25,000	10,000
Range—3,000 Mi.		
Payload (lb.)	16,500	31,600
Time (hr.)	13.2	18.9
Average speed (mph.)	230	158
Altitude (ft.)	25,000	10,000
Range—4,000 Mi.		
Payload (lb.)	3,200	16,000
Time (hr.)	17.6	25.7
Average speed (mph.)	230	155
Altitude (ft.)	25,000	10,000

I SAW RUSSIA'S AIR POWER

By GEORGE D. RAY
Bell Aircraft Corp.

First hand report by an American aeronautical engineer on Russia's employment of American airplanes, on air fighting conditions on the Eastern Front, and on Russian-designed aircraft.

IN THE SPRING OF 1943, the writer was requested to accompany a technical mission to the U. S. S. R. as a representative of the Bell Aircraft Corp's engineering department. Our group arrived in Russia on Aug. 10 and remained for approximately four months. During our stay, our headquarters were in Moscow, where the writer was present at several meetings with the Technical Staff of the Red Air Forces, had an interview with a prominent Soviet designer, and visited a branch of the Central Aerodynamic & Hydrodynamic Institute. In addition, two trips were made by air—one from Moscow to a larger fighter base near the front line, the other to a large training center.

Purpose of our trip was to observe the *Airacobra* in action, to discuss any engineering and service problems that might have arisen in operation of the P-39 in Russia, and to learn what design improvements in the *Airacobra* and later Bell fighters seemed desirable in the light of Russian experience.

The Bell P-39 fighter was first sent to Russia as a result of a Lease-Lend transfer from England of a relatively small number of airplanes. These planes were assembled and flown at a base near Moscow in the winter of 1941-1942. We were introduced to some of the Russian officers who had directed this work and were told some of their early experiences. It is to the credit of the Red Air Forces technical staff and to the designers of the airplane that no serious difficulties were encountered, a'though it was not possible at that time for a Bell representative to be present. In fact, until last spring no Bell or Allison representative had visited the U. S. S. R., although many P-39's and Allison engines were in use.

We found that the *Airacobra* was performing very well as a short-range fighter at medium altitudes, although at times it is used for other purposes. Usually Russian attack airplanes are employed for strafing and low-level bombing attacks, rather than fighters.

As a Russian fighter, the P-39 is lightened by omitting the wing guns and by using somewhat less radio than is installed at the Bell factory. Certain modifications were necessary at first for earlier P-39 models because of the rigors of winter on some parts of the front, but most of these are now incorporated into the airplane's design.

In most respects, however, the P-39 as operated in Russia is identical with its sister ships in the South Pacific and other American war theaters. The original paint is altered only by replacing the American insignia with the Red Star, and the original decalcomanias which locate points for servicing operations and items of equipment are permitted to remain in English, even though at first sight they must be as confusing to the Russian mechanics as even the most familiar words were to us when written in the Russian alphabet.

The huge task of translating service literature from English to Russian is carried out continuously by technicians of the Red Air Forces. While the translation of the rapidly changing terms of our technical aeronautical language into any other language is always quite exacting, we found that once the alphabet is learned, the Russian language is not quite so formidable as it at first appears.

The *Airacobra's* record in combats with German fighters, dive-bombers, and medium bombers is very good, some *Airacobra* pilots having as many as 30 victories to their credit. For the most part, fighting conditions vary from those encountered in North Africa, Italy, and the South Pacific in that the country is quite level, which permits installing airfields close to the front lines, so that operations rarely require the use of auxiliary fuel tanks. It is thus more frequently possible for the pilot to land back of his own front lines in spite of severe damage to airplane structure or power plant.

Combats usually take place at altitudes of 15,000 ft. or less, rather than at the extreme altitudes sometimes required in other theaters. It is charactertistic of the fighting in Russia that comparatively little long-range strategic bombing has been carried out by either side.

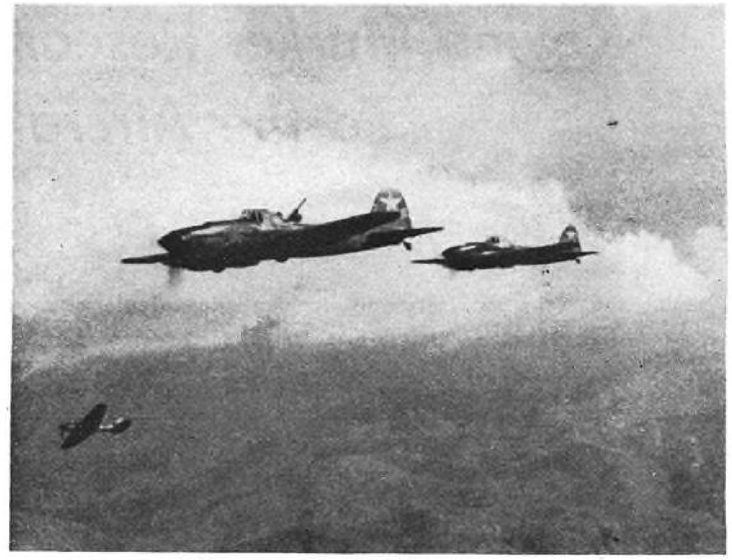

The Stormovik is a purely Russian product. It has no American counterpart. (Preslit-Sovfoto photo.)

Russian airplane production is concentrated chiefly upon single-engine fighters, such as the Yak-9 and LA-5; twin-engine dive-bombers and medium bombers, such as the PE-2 and DB-3; the well-known single engined *Stormovik* attack airplane; and military versions of the Douglas DC-3.

Although the bulk of Russian-operated airplanes are Russian built, these have been supplemented by American planes which are of similar types, except that the *Stormovik* has no close American counterpart. They are operated in Russia without the help of American technicians, other than for several brief visits by technical advisors.

An excellent opportunity to see several modern Russian fighters and the PE-2 dive-bomber at close range and to compare them with Allied and enemy types was afforded the writer at a branch of the Central Aerodynamic & Hydrodynamic Institute, which is in many respects a counterpart of our NACA.

This exhibit is permanent and intended to acquaint Russian aeronautcal designers with arrangements, mechanisms, and methods of constructon which are used by others. To make the interior details easier to see, much of the wing and fuselage covering material is removed on one side of the aircraft's plane of symmetry.

At the exhibit, undesirable as well as desirable characteristics are indicated, such as units which are installed so that they are difficult to service or remove. It was the writer's impression that the Russian airplanes were simplest, the German airplanes were best designed for servicing, and that American airplanes, characteristically, contained the most radio equipment, the best heaters and avigation instruments, and were better adapted to a wide range of operating conditions.

Russian airplanes, particularly the *Stormovik* and fighter types, employ wooden plastic bonded construction extensively, or mixed wood, duraluminum, and steel structures. The most notable example of mixed construction is the Yak-9, which has wooden wing covering and ribs, steel and duralumin spars, a steel tube fuselage, and duralumin tail surfaces.

Russian fighter types employ cannon and heavy machine guns mounted near the centerline of the airplane, and they are comparatively lightly armed and armored. Their low weight-to-power ratios result in good rates of climb, while their top speed is approximately the same as that of opposing enemy fighters. As noted above, Russian fighters are comparatively unencumbered by radio equipment, blind flying equipment, elaborate starting systems, heaters, life rafts, etc. Wing loadings and landing speeds are about the same as those of American fighters.

(*Turn to page 249*)

Bell engineers who were on the Russian mission talk it over with Pres. Larry Bell. Left to right: William R. Hawkins, Leighton W. Rogers, Lawrence D. Bell, Francis J. Ziombeck, and Author George D. Ray.

The Yak-9, one of the newer fighters of the Soviet Air Force.

Keying Market Research To the Aircraft Industry

By **E. E. LOTHROP,** *Manager, Research & Statistical Dept., Aeronautical Chamber of Commerce*

Outlining the steps necessary for planning adequate long-range merchandising, the author points to the need for a comprehensive program triply aimed at three major outlets.

THE AIRCRAFT INDUSTRY has three basic markets—military, transport, and private—which will govern the volume of postwar production. Of these markets, the first two can be subdivided as follows: Military into domestic and export; and transport into airline (both domestic and foreign), fixed base or charter outlets, and private corporation operations.

While economists agree that the postwar period will be one of intense competition in all lines, for the aircraft industry it will be particularly intense because of greatly expanded production capacity, political pressure to use that capacity, development of new planes, and the desire to employ as many returning servicemen as possible.

If it is thus true—as seems evident from every angle—that aviation will have its biggest competitive struggle in a cutback market, it follows that the organization which will maintain or improve its position will be that which combines improved design and low-cost production with effective marketing. Intelligent use of marketing procedures may, in fact, spell the difference between success or failure.

While winning the war is today paramount, effective marketing cannot be left untouched too long; such programs can no more be turned on at a moment's notice than can production schedules. Moreover, market planning is of value right now for, properly publicized, such efforts can nullify the restless uncertainty of workers whose most persistent question is, "Will I have a job after the war?" Such planning will require even more flexible thinking than has been necessary, it will require consideration of many more problems, and it will require thinking further ahead.

Re-conversion from war to peacetime production is, in large part, a marketing problem, in which the first step is to calculate how the markets may be affected by estimated postwar incomes and total business volume. This calculation will involve an appraisal of accumulated demand of the transport and private aviation markets at the end of the war and will also necessitate analysis of the effect of war-born improvements in planes as well as possible changes in distribution methods or price policies.

The market potential accompanying high incomes, deferred demand, and accumulated purchasing power must, then, be translated into an effective demand for the aircraft industry. This, in turn, calls for more, rather than less, sales and advertising effort.

If aviation is to maintain a large part of its present organization, its current business volume and corresponding place as the nation's No. 1 industry, it must be prepared to market in ways which are relatively foreign to present operations. The natural tendency would be for manufacturers to seek those lines in which they can make most effective use of demonstrated technical engineering and production skills, but this would require distribution through unfamiliar channels, and to a completely different type of market. It would also mean breaking into a field where it is essential to have dealer organization and ability to distribute costs of promotion and other overhead over a limited volume.

Looking further into the future, those concerned with aviation markets must face the fact that accumulated demand for transport and private planes will be relatively small in comparison with existing production facilities. This apparently leaves the alternatives of expanding this market as far as possible by such means as rapid obsolescence or "dynamic" pricing.

Finding the answers to these problems requires market research which, to be effective, must be private research, since cooperative research is like asking an outsider to look at one's watch to see what time it is. For the aircraft industry there are two basic answers to be found: First, what planes can be sold, and, second, how many will the market absorb?

In the military market particularly, consideration must be given to what the war itself is doing to change many conditions on which prewar estimates were based. The extent to which production has been geared up to meet war demands has drastically altered all ideas of volume, so much so that output can be many times greater than demand. Due allowance, however, should be made for the fact the United States undoubtedly will maintain a regular Army and Navy of about 2,000,000 men for police purposes; the job of properly supplying such a military force will in itself be no mean market.

The ultimate military market will depend on five principal factors: First, length and severity of the war and, as a related factor, the number of planes surviving hostilities; second, decisiveness of the victory and peace terms; third, the role of the United States in international policing; fourth, new developments in military aircraft and the resulting obsolescence rate for existing craft; and fifth, public and Congressional reaction toward continued military spending.

(Turn to page 255)

Side Slips

JUST READ an intriguing story of a Dane's escape to England in a small prewar training plane, detailing the vicissitudes of readying the craft and securing—under the Gestapo's nose—fuel for the over-water hop. One line in the story, though, completely baffles our engineering friends. "To prevent the Germans from detecting the plane," it said, "the exhaust pipe was camouflaged."

• They call one avigator "Purple Heart Johnny," but it's usually redfaced Johnny at a mention of his nickname. He'd gotten his plane over the target and had made a good run, then just as the plane got on course for home the flak got thick and close. Suddenly he felt a stabbing pain in the back of his lap, and he quickly reported over the inter-com that he was wounded. His crew mates made him comfortable and kept him quiet; the pilot radio'd ahead to the base to have an ambulance waiting.

As soon as they'd landed, the surgeon started his examination and found the "wound." It had been caused by the opening of the big safety pin which "Purple Heart" used to hold up the baggy part of his wool underwear.

• Aircraft recognition is a study which apparently still hasn't been mastered by the masses. The other day, for instance, three young Navy ferry pilots delivering *Wildcats*—via a circuitous route—buzzed New York and rat-raced around the Empire State Building at about the 29th floor. Calls to the police and newspapers from frightened, indignant, or amused citizens had everything from one to six planes involved, and the types reported ran from "army planes" to "a Jap *Zero*."

• The young fighter squadron colonel's first flight in a B-26 was as pilot, and needless to say, he learned a lot while falling in love with the ship. Since the flight was a long over-water hop, he was a touch tired after making his first landing. Not too tired, though, to agree that the visiting brigadier general could have a flight—also to be the b.g.'s first in that type of craft. In fact the general would act as co-pilot.

With his first takeoff still a vivid memory, the colonel vaguely remembered reading or hearing someplace that the way to get a B-26 in the air was to hold the nose down till you had plenty of speed, then haul back on the wheel. Anyway that's what he tried. But as the ground speed went up, the pressure on the control column got greater—he was pushing with all his might to keep it forward.

Finally he sneaked a look to see "what gave" with his be-starred co-pilot. "Imagine," he reports, "there the guy sat with his feet braced against the instrument panel, pullin' back till I thought he'd bust. I just relaxed, and brother we really took off."

• It's wonderful to know how the armed forces trust the press, how the average working pressman's loyalty is unquestioned: Instructions regarding handling of restricted material, for example, say it may be read by anyone in government service and civilians whose loyalty is unquestioned, "but *never the press or public.*" (The italics are ours, but the instructions had it in bold-face type.)

• The most beautiful case history concerns the B-29—about which the American press can say practically nothing; pictures are *verboten*, performance and construction data must be kept super-hush-hush. Yet, in addition to high explosives and incendiaries, our bombers going over Germany drop leaflets which show a good accurate silhouette of the B-29. The caption, written in German, gives a good idea of the craft's size and says this is the new American *Superfortress* that's going to really raise hell with you if you don't surrender. And still "public relations" officers wonder why working reporters hesitate to salaam as they repeat "you must not say anything that will give aid or comfort to the enemy."

• Watching some expert parachute packers at work the other day reminded us of the time, some 20 yrs. ago, when we assisted at a repacking. A barnstormer, fellow who'd shifted to chute jumping from rodeo bronc riding—which he considered too dangerous—had made a successful jump and passed the hat to collect $19.45. We went into an abandoned restaurant to use the counter as a packing table, there going to work carefully on the shroud lines and outer folds. But getting to the final stage, which involved a trick folding of the "lobe" part of the Russell chute, he *crammed* the silk into the pack, drawling, "There's a very special way to do this, but I don't pay no heed. Thing always seems to open when I jump."

Old man Maguire WOULD try jet propulsion.

It's a day of Development, too!

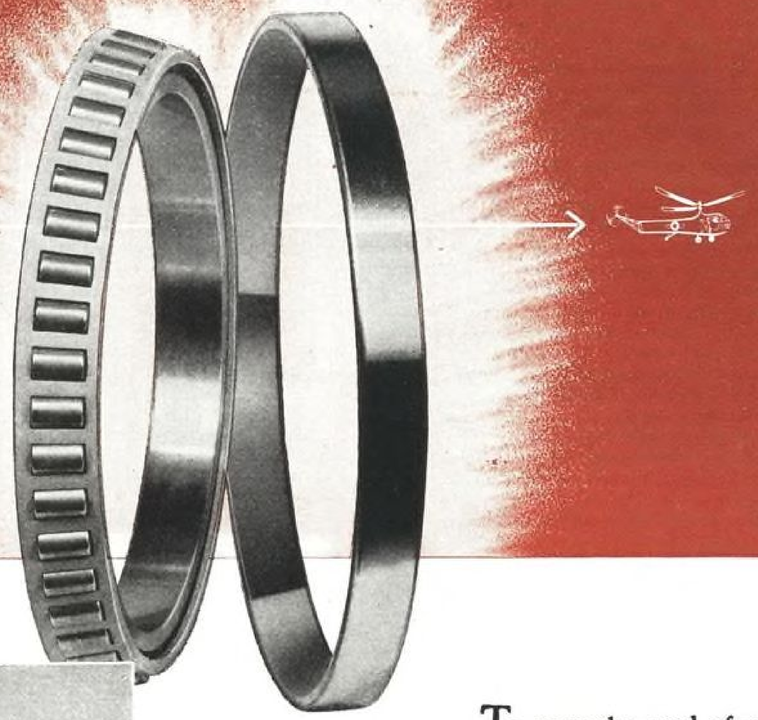

* *A Sikorsky XR-4 hovering motionless over East Hartford, Connecticut. This first helicopter to be delivered to the Army Air Forces is equipped with six Timken Bearings in the Main Rotor Blade, two in the Tail Rotor Gear Box, and six in the wheels.*

To meet the need of aircraft engineers for an anti-friction bearing — lighter in weight — of compact design — with maximum radial and thrust load carrying capacity — Timken engineers have developed a new series of tapered roller bearings.

Already, these bearings have contributed to the fine performance of Sikorsky helicopters . . . while giving them all the other advantages of Timken Bearing design for aircraft applications: assured smoothness of operation . . . ease of handling . . . power conservation and endurance . . . economical maintenance.

Consult us on your requirements. We will be glad to make recommendations.

THE TIMKEN ROLLER BEARING COMPANY, CANTON 6, OHIO

TIMKEN
TRADE-MARK REG. U. S. PAT. OFF.
TAPERED ROLLER BEARINGS

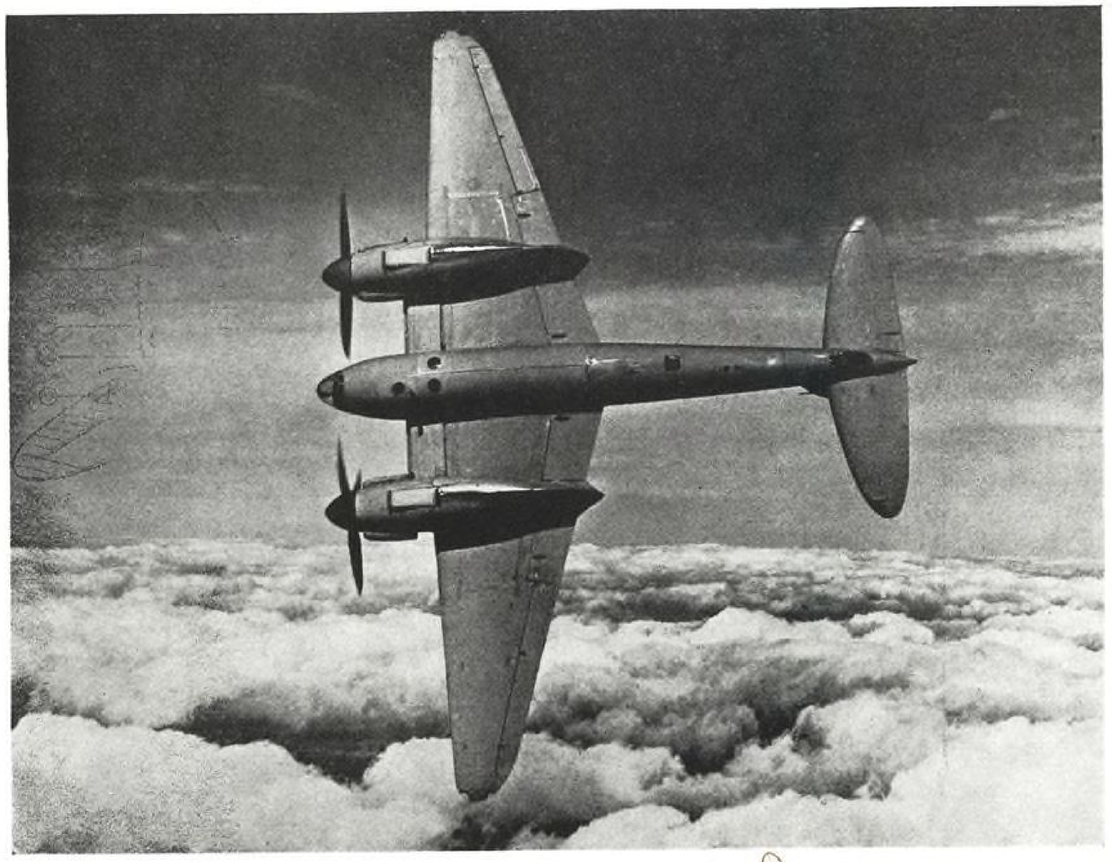

DESIGN ANALYSIS NO. 6

DeHavilland "Mosquito"

PART I

By CHESTER S. RICKER, *Detroit Editor, "Aviation"*

Continuing Aviation's comprehensive series, deHavilland's famous all-wood fighter-bomber is torn down to design and construction fundamentals, revealing unusual thought and execution . . . First of a graphic two-part study.

ALTHOUGH the *Mosquito* performances make newspaper headlines almost every day, the background of unusual design which produced this airplane is not common knowledge. Neither are the details of its advanced all-wood construction, which is the culmination of 23 yr. of deHavilland experience in wooden aircraft. It is of interest here to note that during this time all DH designs except one have been in wood.

The ideas of Sir Geoffrey deHavilland and C. C. Walker, director and chief engineer, were presented to the British Air Ministry in Sept. 1939. Their aims were to create a wooden operational aircraft to increase air force strength without further strain on the metal industries, also to sacrifice armament for greater bomber speed.

The design was immediately begun, and in Dec. 1939 a layout was presented which has not yet been fundamentally changed—a twin-*Merlin*-engine two-man crew wooden bomber without armament, carrying a 3,000-lb. bomb load and having a 1,500-mi. range at fighter speed.

In spite of the fact that the company was rapidly expanding production of *Tiger Moths* and *Oxfords* for training purposes, once the *Mosquito* was proposed production was immediately started on the *Mosquito* prototype—the company's 98th design. Only 29 months after the design layout was completed, a full squadron bombed Cologne—on May 30, 1942.

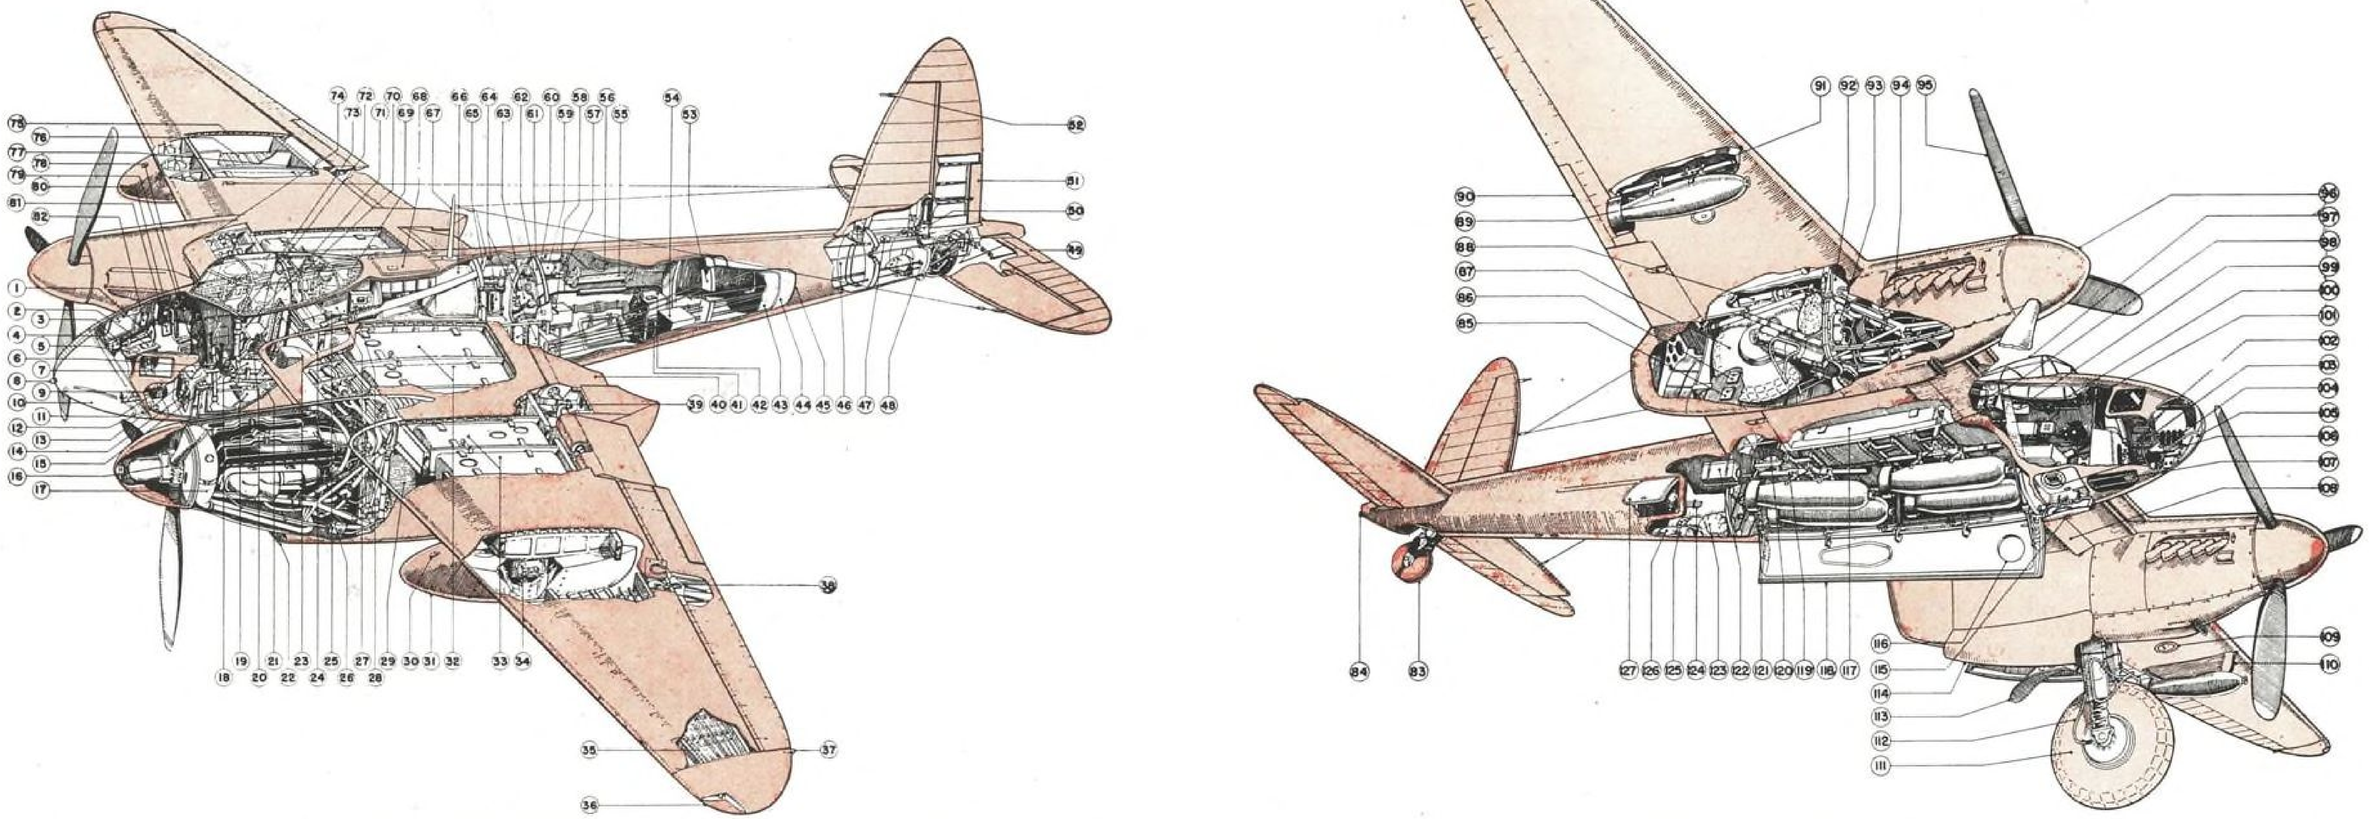

Upper and lower sectional view of Mosquito. References: (1) Fireman's axe; (2) bombardier's elbow pad; (3) inter-com.; (4) portable oxygen bottle; (5) bombardier's writing pad; (6) pilot's compass; (7) parachute stowage; (8) navigation headlight; (9) bombsight; (10) bombardier's window; (11) impact switch; (12) Plexiglas nose; (13) gravity switch; (14) fire extinguisher; (15) pilot's thigh rests; (16) Hydromatic propeller; (17) coolant header tank; (18) pilot's seat; (19) inter-com.; (20) engine controls; (21) elevator trim tab hand wheel; (22) carburetor air intake; (23) oil and coolant radiators; (24) pilot's harness; (25) throttle and propeller controls; (26) oil trap; (27) radio transmitter; (28) radio compass; (29) oil tank; (30) dump tank filler cap; (31) dump tank; (32) inboard fuel tanks; (33) outboard fuel tanks; (34) dump fuel tank release gear; (35) stringers; (36) navigation lamp; (37) identification lamp; (38) aileron control; (39) flap jack and crank; (40) flaps; (41) rear camera; (42) stowage for camera heating cables; (43) plywood inner skin; (44) balsa; (45) plywood outer skin; (46) bulkhead No. 6; (47) rudder mass balance; (48) bulkhead No. 7; (49) trim tab; (50) rudder linkage; (51) trim tab; (52) pitot head; (53) bulkhead No. 5; (54) camera mounting boxes; (55) spike pickets; (56) DF loop; (57) lamp; (58) radio; (59) compressed air container; (60) de-icing fluid tank; (61) bulkhead No. 4; (62) ground starter plug; (63) pneumatic hydraulic panel; (64) oxygen bottles; (65) hydraulic tank; (66) long range oil tank; (67) aerial mast; (68) dinghy stowage; (69) antenna loading unit; (70) pilot's armor; (71) observer's seat; (72) trailing aerial winch; (73) observer's armor; (74) oil and coolant radiators; (75) double top skin and stringers; (76) single under skin and stringers; (77) aileron tab control; (78) observer's demand oxygen regulator; (79) instrument panel; (80) camera temperature gage box; (81) camera leads stowage; (82) inspection lamp stowage; (83) tail wheel stowage; (84) navigation light; (85) stowage picketing eyes; (86) stowage, landing gear locking cap; (87) landing gear retracted; (88) landing gear jack; (89) 500-lb. bomb; (90) aileron trim tab; (91) universal bomb carrier; (92) firewall; (93) fire extinguisher; (94) stub exhaust; (95) propeller; (96) spinner; (97) cockpit canopy; (98) radio remote control boxes; (99) pilot's pouch; (100) pilot's demand oxygen regulator; (101) dimmer switches; (102) signal cartridges; (103) fire extinguisher; (104) thermos bottles; (105) glycol spray; (106) tail drift sight; (107) ladder stowage; (108) radiator flap; (109) landing light; (110) wing bond fairing; (111) landing wheel; (112) brake hose; (113) mud guard; (114) landing gear doors; (115) entrance door; (116) camera window; (117) center fuel tank; (118) bomb bay doors; (119) bomb carriers; (120) bomb winch; (121) bomb bay door jack; (122) ration container; (123) engine covers, sleeping bags, etc.; (124) locking controls, stowage; (125) signal strips; (126) emergency tool kit, and (127) rear entry door.

Use of wood and employment of the wood working industries, it is felt, contributed largely to the speed with which the *Mosquito* was put into production. It is built in three types: Bomber, fighter, and photo-reconnaissance.

The *Mosquito* is now being constructed in North America by deHavilland Aircraft of Canada, Ltd. Launching of the Canadian version introduced many new engineering problems since all of the manufacturing equipment had to be purchased on this side of the Atlantic. This required a tremendous amount of re-engineering before attaining production. On this score, much credit is due W. D. Hunter, Canadian chief engineer; H. Povey, chief production engineer; F. H. Burrell, chief service liaison engineer, who came from the parent company in England; and W. J. Jakimiuk, chief Canadian design development engineer.

The power plant of the Canadian version consists of two Rolls-Royce *Merlin* 31, 33, or 225 Packard-built engines, each rated at 1,260 bhp.

DeHavilland's long experience in building all-wood airplanes has been fully utilized. Chief feature of the design is the balsa-plywood sandwich principle used in constructing the fuselage and other structural wood parts. Prior to the war this fabrication was successfully applied to deHavilland *Albatross* four-engine transports.

Wood construction has many advantages, according to *Mosquito* designers. It materially reduced the time required to design and produce the prototype, compared with a metal ship. Wood design is also one of the quickest methods yet devised to produce a monocoque type unit, and by using split fuselage construction, the craft is one of the easiest in which to install equipment. It utilizes the skilled labor of wood-working trades, which were greatly curtailed by the war.

Structurally, the plane also has many advantages. Due to comparatively low skin stresses and light weight of the wood, it is possible to produce a fuselage that offers more resistance to buckling than a metal one of the same weight per square foot. The system of molding fuselages makes them remarkably free from "waviness." When finished they are fabric covered.

The one-piece full cantilever wing is also of all-wood construction. It is formed on two full-length box-type wood spars. The top skin is made from two 0.25 in. plywood skins separated by Douglas fir stringers. Also of wood construction are the tailplane, fin, and flaps.

Engines and main landing wheels are mounted on the wings and completely streamlined by sheet metal nacelles and folding landing gear doors. Inside the nacelles there is a metal bulkhead or firewall attached to the front wing spar. This is secured to the same brackets to which the tubular framework, which supports the engine in front and the main landing gear in the rear, is attached.

Engine coolant and oil radiators are mounted in the leading edge of the wing between the fuselage and each engine nacelle. Cooling air enters

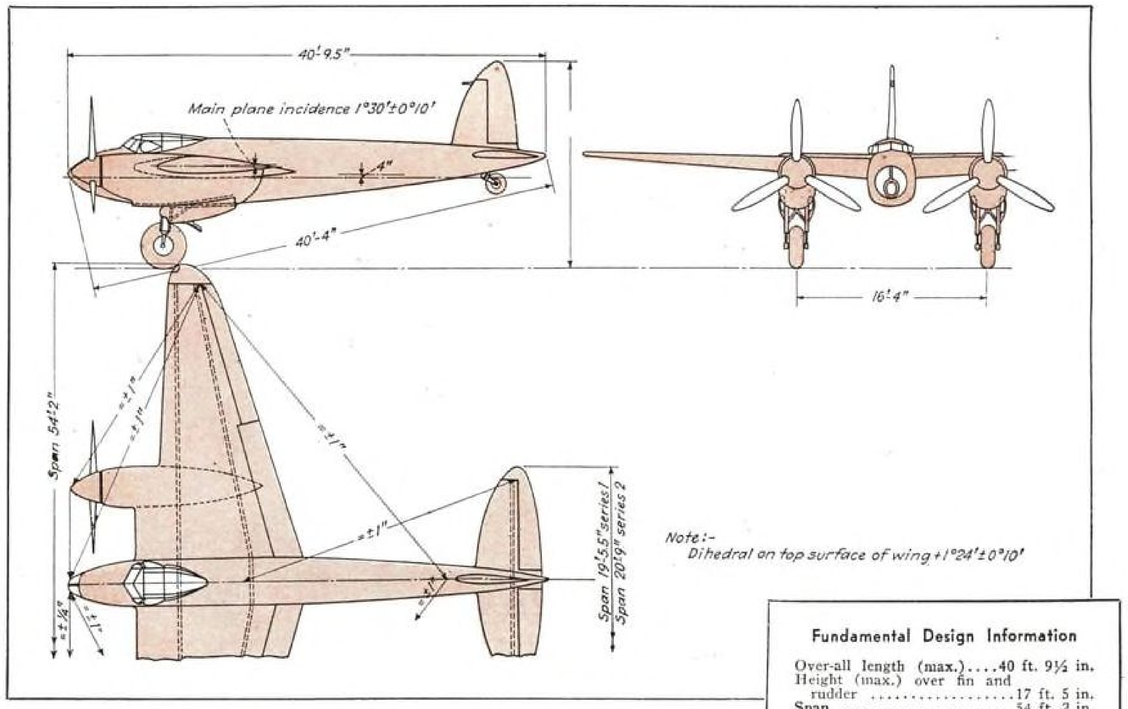

Fundamental Design Information

Over-all length (max.)	40 ft. 9½ in.
Height (max.) over fin and rudder	17 ft. 5 in.
Span	54 ft. 2 in
Wing area (net)	440 sq. ft.
Taper ratio (root chord/tip chord)	3.2 to 1
Length root chord (25 in. from fuselage centerline)	12 ft. 3 in.
Length tip chord (300 in. from fuselage centerline)	3 ft. 10 in.
Fuselage depth (max.)	5 ft. 5½ in.
Fuselage width (max.)	4 ft. 5 in.
Design gross weight, Canadian handbook	21,313 lb.

through a fixed opening in the leading edge, and air flow is controlled by adjustable flaps on the underside of the wing. Provision is made to deflect a part of the radiator-heated air into the cockpit.

The landing gear is as unique as the rest of this all-wood plane. Here, rubber blocks are provided to cushion landing shocks. This rubber-block design is applied to both main landing and tail wheels.

How unusual the *Mosquito* design really is can better be judged by a careful analysis of the various units which comprise the ship:

Design Features—Fuselage

The complete fuselage is made up as a balsa-plywood sandwich, the 0.437-in. balsa being compressed between two 0.062-in. 3-ply spruce or birch skins. Since balsa wood varies greatly in weight—from 5 to 30 lb. per cu.ft.—it must be carefully selected. Weight of that used in the *Mosquito* averages about 9 lb. per cubic foot. With a large volume used, this is an important item in the final weight of the ship.

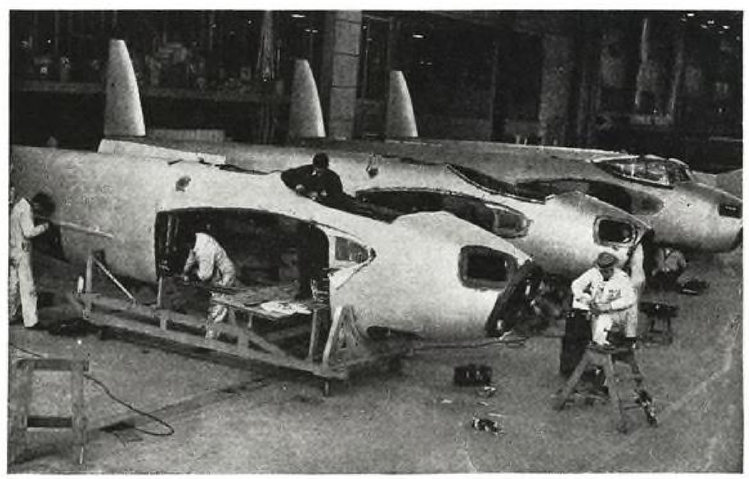

Fuselage as received from a subcontractor, with preparation for fitting windows, doors, and canopy before mounting on wing.

Kind of plywood and direction of grain is changed to suit stress conditions. In the section from mid-cockpit forward to bombardier's window, 3-ply spruce is used. Here the fuselage has a sharp compound curvature, requiring narrow strips, taper cut, with two plies lengthwise and one transverse.

From the forward spruce plywood section back to about 6 in. aft of bulkhead No. 5, 3-ply birch is used. This forms about 60 percent of the fuselage. It is laid on the structure with the outside grain running longitudinally. The bomb bay doors are included in this section, also the bomb bay side panels beneath the wing, the latter having diagonal grain instead of longitudinal. The bomb bay door panel has inside and outside skins that are preformed before assembly. The under wing section is glued in place with the rest of the fuselage and cut out after the finished-half fuselage is completed. All other panels, in as large sheets as possible, are carefully scarfed together and glued in place.

The rear fuselage section, which includes bulkheads 6 and 7, is also made

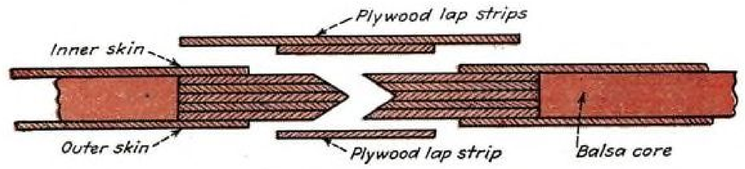

Details of skin joint where fuselage halves are mated. Plywood lap strips are glued and screwed into the shell members.

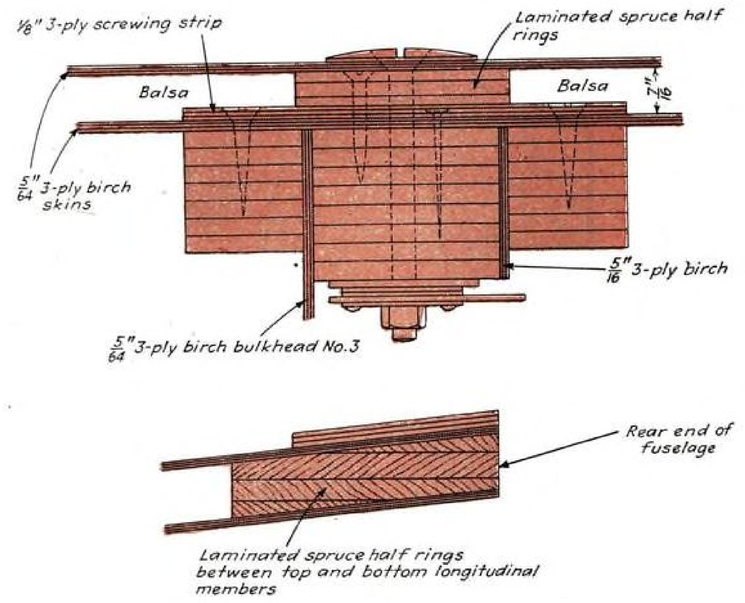

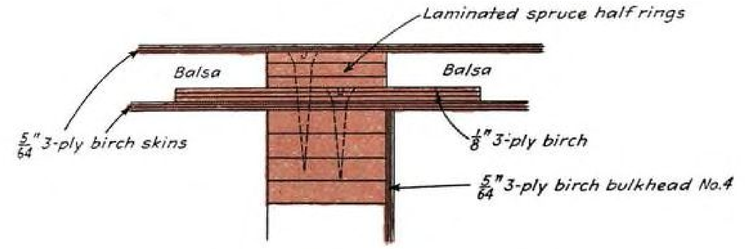

Methods of reinforcing monocoque walls at bulkheads.

with birch plywood, but the grain is laid on diagonally, better to resist torque of the empennage. All vertical joints between panels are arranged to be not less than six inches away from a bulkhead. All longitudinal joints are made to lap over the spruce stiffening stringers.

In fabrication the fuselage is built up in two halves on separate right and left hand jigs. The wing openings on each side, cockpit aperture on top, dinghy compartment opening, and ends of the fuselage are left open during construction. Top and bottom edges of each half are reinforced with spruce laminated members. Where the two multi-ply strips bear against each other, "V" grooves in each half accurately center the edges but are not glued. Inner and outer plywood skin is stepped off each side of the joint so that a lap strip of equal thickness to the outside skin can be applied. This is glued and tacked in place, both inside and outside the assembled fuselage. It is further strengthened inside by a 0.12-in. 3-ply birch strip twice as wide as the first one applied.

Union of the two halves does not depend entirely on bonding of these top and bottom edges. Of the seven bulkheads, six are made in halves and have a butt joint on the vertical centerline of the fuselage. The rear No. 7 bulkhead is made in one piece and inserted at the time the two fuselage halves are mated.

Wherever there is a bearing between parts that are bolted or fastened together, fabric reinforced Bakelite is used to prevent compression of the softer wood at these points. The Bakelite is faced with 0.50-in. birch veneer to assure a secure bond when glued to plywood members.

Ends of the fuselage are reinforced by laminated and formed half circles glued between the inner and outer skins. They are of the same thickness as the balsa core. All openings are reinforced around the edge by solid

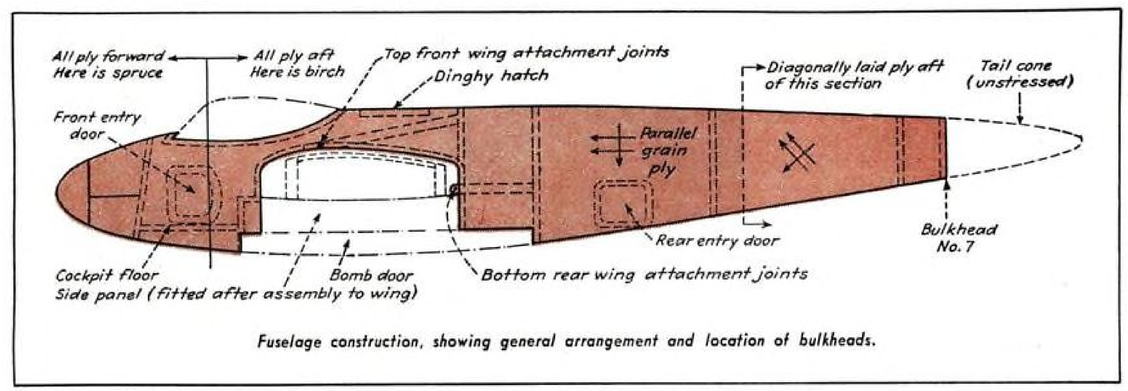

Fuselage construction, showing general arrangement and location of bulkheads.

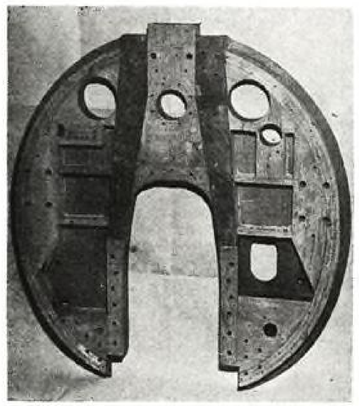

Detail of rear bulkhead No. 7, looking forward. Left half is shown with plywood facing removed to reveal material and structure.

spruce, walnut, or laminated and formed members. In addition, two stringers are built into each half and extend from No. 3 bulkhead to No. 7. These are buried between the skins in the balsa core. Only external stiffening member is a long half-round piece on the left side of the fueslage rear above the rear entry door. The upper stringers tie into No. 3 bulkhead and run forward about 1 ft. to include the rear end of the wing pickup member.

Bulkheads

Method of assembling bulkheads is the same for all except No. 7. Intermediate bulkheads are all located in their proper stations in the fuselage build-up mold, and the inner skin is stretched over them. Glue and screws are both used for attaching skin to bulkhead. There is a 0.12-in. 3-ply screw strip approximately double the width of the bulkhead thickness glued to the inner skin, through which are driven screws to secure bulkhead.

Next, formed laminated spruce semicircular pieces of same width as the bulkhead are glued and screwed on top of the first strips and are also screwed directly into the bulkhead. Combined height of the two pieces, attached to the bulkhead but outside the inner skin, is equal to the balsa core. These bulkhead reinforcements are stopped off at the stringers.

The front floor forward of bulkhead No. 2 reaches from side to side of the fuselage, and when joined with No. 2 bulkhead and instrument panel structure it greatly stiffens the front section. Bulkhead No. 3 carries at its outer lower corners the heavy reinforcements to which the lower wing pickup brackets are bolted. These are attached not only to the bulkhead but also to side of the fuselage and forward ends of the lowest stringers built into the aft section. These stringers are of larger section for about 40 in. aft of the bulkhead in order to distribute stresses over more of the fuselage at this point.

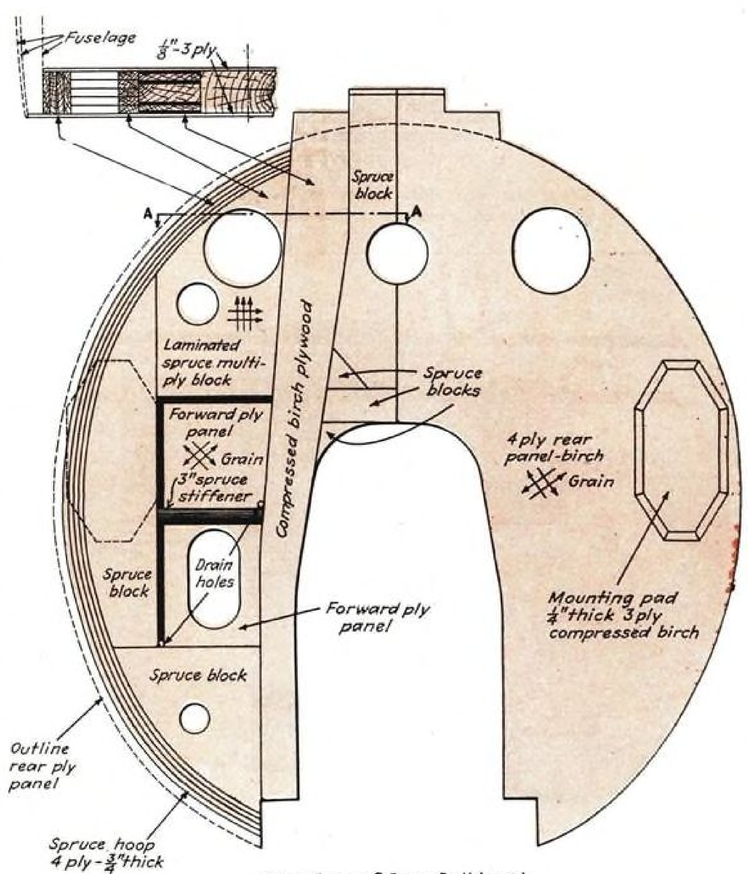

Rear Face of Rear Bulkhead Looking Forward

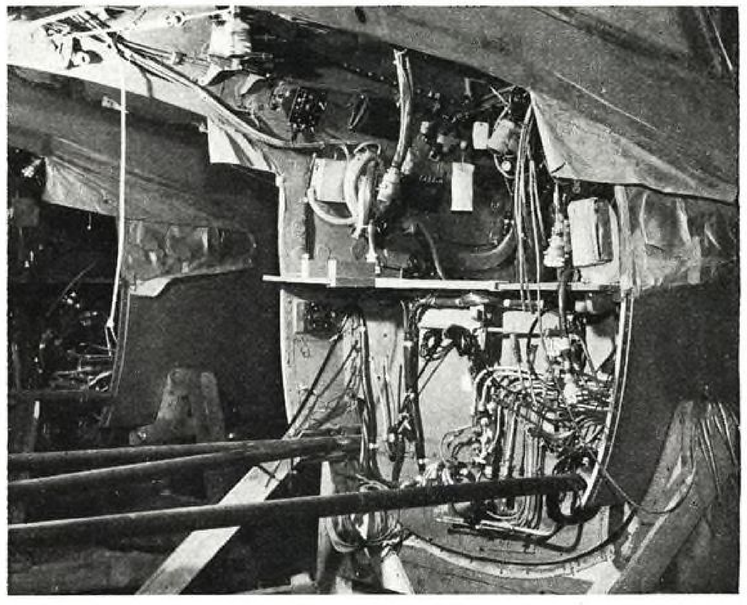

Looking forward into nose section, showing cockpit, also No. 2 bulkhead fittings which are installed prior to mating with wing. Note tubular bracing which supports fuselage.

Probably the heaviest load of any member in the fuselage is carried by the rear bulkhead, for it supports the tailplane and tail wheel, also shares fin and rudder reactions with bulkhead No. 6. It is a composite structure built up of many types and forms of wood. Spruce blocks, either solid or laminated, are provided for certain parts. The outside edge is made from a 4-ply spruce half ring. The two members which run vertically on either side of the opening are compressed birch plywood. At top they support the rear bracket of the fin, while at the bottom they carry the tailwheel bracket and tailplane rear spar braces. The whole unit is tied together by 0.12-in. 3-ply birch facings glued to each side.

The side panels which finally close the opening below the wing are held in place by a 2.0x0.12-in. aluminum plate which covers the front end gap. This end plate is securely bolted. At the rear end, two 1.62x0.06-in. aluminum strips are placed on each side of the panel and held with through-bolts. These strips align the rear edge with the aft skin of the fuselage. They close a gap or expansion joint about 0.37-in. wide at the rear end. The panels are only a closure, since the wing is the structural member which ties together the fore and aft lower edges of the fuselage.

Just behind the cockpit opening and above the wing is a small bulkhead. Behind this in the top of the fuselage are two more openings—the rectangular front one for the dinghy, the circular aft one for the radio mast support. The cover over the dinghy, in event of immersion, may be instantly released by an electric trigger operated from a switch in the lower part of the fuselage.

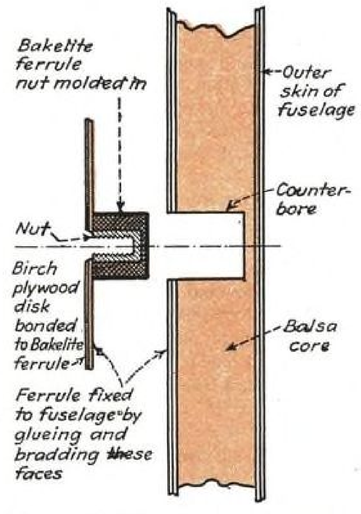

Unique method used in fastening accessory mounting units in wall of fuselage.

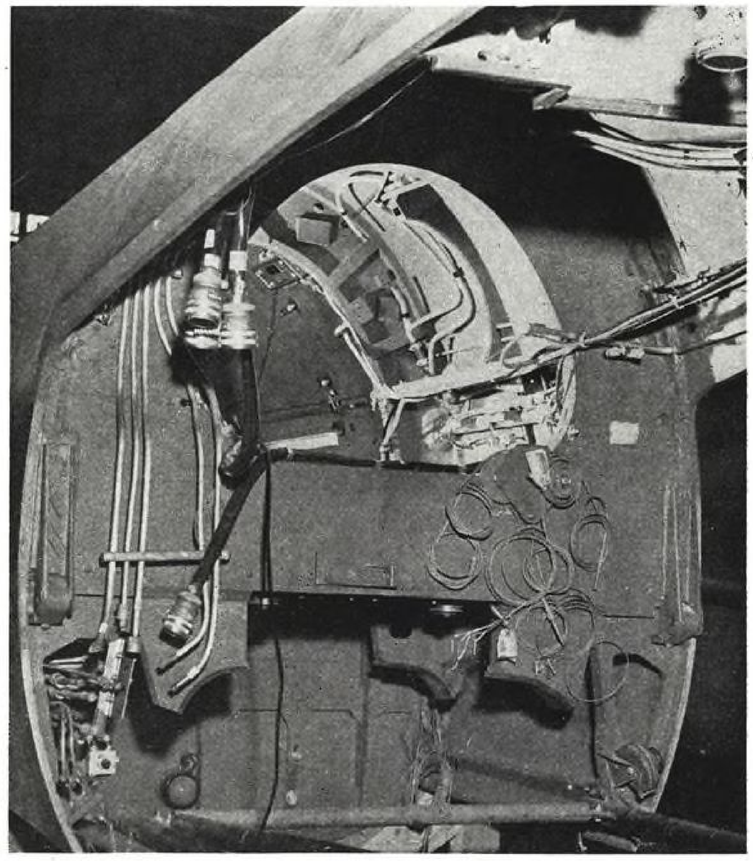

View aft of wing opening, showing bulkheads 3 and 4, fittings for picking up rear spar, and wing centering bracket. Note how all cables, tubes, and fittings end here for easy installation of wing; also temporary tubular braces are attached to bomb door hinge brackets.

When finished the entire fuselage is covered with Mandapolam, an airplane fabric that is stretched with dope, then painted. Several coats of dope well rubbed down assure a finished smoothness of skin, free from ripples and of course from rivets, thus contributing tremendously to the high-speed performance of the *Mosquito*.

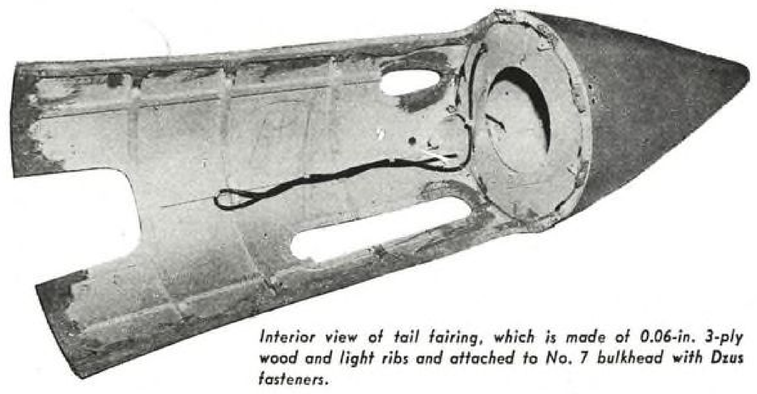

Interior view of tail fairing, which is made of 0.06-in. 3-ply wood and light ribs and attached to No. 7 bulkhead with Dzus fasteners.

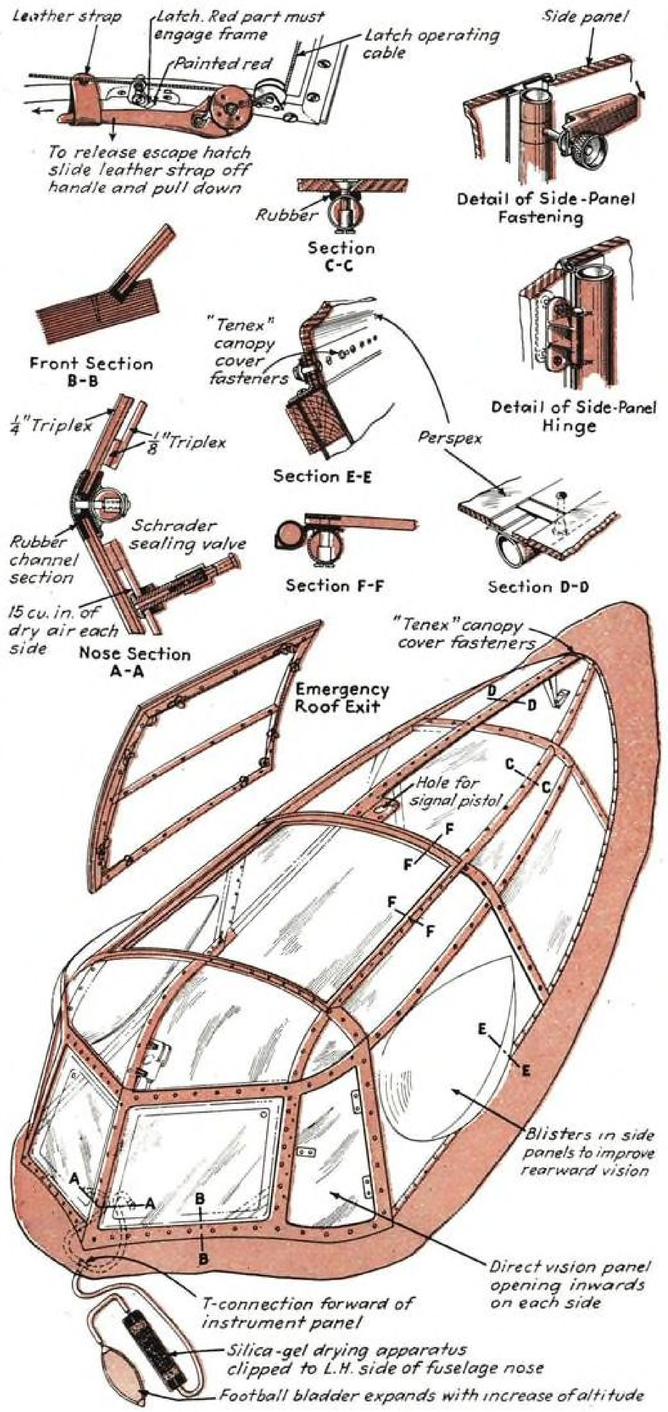

Construction of cockpit canopy showing use of air space in triple plate windshield, also method of evacuating air to prevent fogging in cold or high altitudes.

Also the wood structure is so stiff that rippling of the skin in flight does not occur and interfere with the ship's speed. Importance of this finish is illustrated by the results when using a night-flying "velvet" black paint. It is claimed that difference in paint smoothness frequently caused a speed loss of as much as 25 mph.

Method of fastening equipment and attachments to the inside of this perfectly smooth fuselage is ingenious. Templates are provided for locating bracket holes into which Bakelite-molded ferrules are glued. Each ferrule has a brass nut molded inside of it and a 2-in. diam. 2-ply birch disk glued to the outside end. When glued and bradded in place, these nuts make a secure foundation for any attachments. Electric motor driven countersinks, with a secure stop, control the depth of counterbores in the fuselage, so the outer skin will not be mutilated.

The canopy over the cockpit is built up on a welded steel tubular frame with an angular flange along the lower edge to fasten it to the fuselage. There is an escape opening in the top with a quick release latch. Removable windows at each side of the "V" windshield provide direct vision if necessary.

The triple-plate anti-fogging "V" windshield windows incorporate a unique system for exhausting the air space between them. Each is connected by a tube with a Schrader air valve. Air can be sucked out but its return is prevented by the valve. A small bladder attached to the outlet tube provides the exhaust system. It expands as the ship climbs, thus the air is sucked out of the hollow windshield. A tube of silica-gel is inserted in the suction line so as to remove moisture contained in the air within the windshields.

Wing pickup members are built up from 0.4-in. laminated spruce with the grain running lengthwise in all plies. The pickup member extends forward from bulkhead No. 3 to the point where it is bolted to the fitting that is mounted on top of the front main wing spar. The adjustable fitting which is bolted to the wing clevis bracket is secured to the wooden pickup member by top and bottom plates. The pickup at this point is also secured to the side of the fuselage by five through-bolts with a metal compression plate inside the fuselage as a bearing for the nuts.

The wooden pickup member is carefully fitted to the inside of the fuselage and then screwed and glued to the inside skin. A formed 4-ply spruce backing strip forms the core of the fuselage behind the pick-up member.

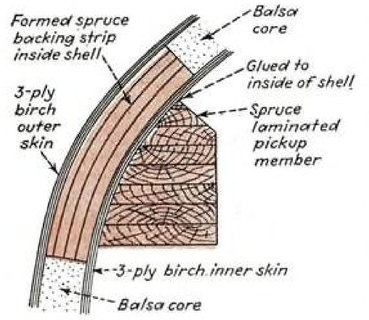

Section through fuselage shell where spruce wing pick-up member is screwed and glued to it. This important part carries front wing attachment joint.

This is glued and screwed in place before the outer 3-ply skin is applied.

A serrated block, tapped out for the adjustable pick-up fitting, is secured between top and bottom metal plates by through-bolts. Transverse grooves relieve the holding bolts of any shearing stresses in a fore and aft direction. The adjustment is ingenious. A sleeve is threaded inside and out with a hex nut on the end. The threads are of opposite hand so the sleeve acts like a turnbuckle. Check nuts are provided on both sleeve and bolt so the whole nut can be locked when adjustment is complete. The wing holding nut is slipped in place through a hole provided in the fuselage skin and secured by a castellated nut.

Drainage of a wooden ship is of vital importance. There are scupper holes provided between ribs and spars, or similar members, throughout fuselage and wings. Holes with flush eyelets are provided at all drain points.

Bonding is another one of the vital features on a wood ship. Every metal bracket or metal part is connected to every other one by flexible metallic tape. This is usually glued to wood members before they are painted. Bonding is soldered to all permanent metal fittings to assure a perfect electrical connection.

Main Wing

This is the main load carrying structure of the *Mosquito*. It carries the engines, landing gear, radiators, gas and oil tanks, and the bomb racks.

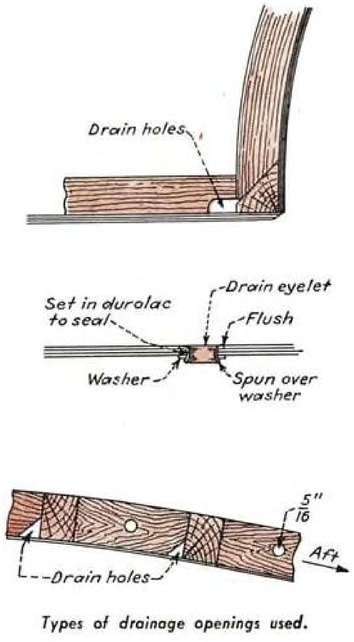

Types of drainage openings used.

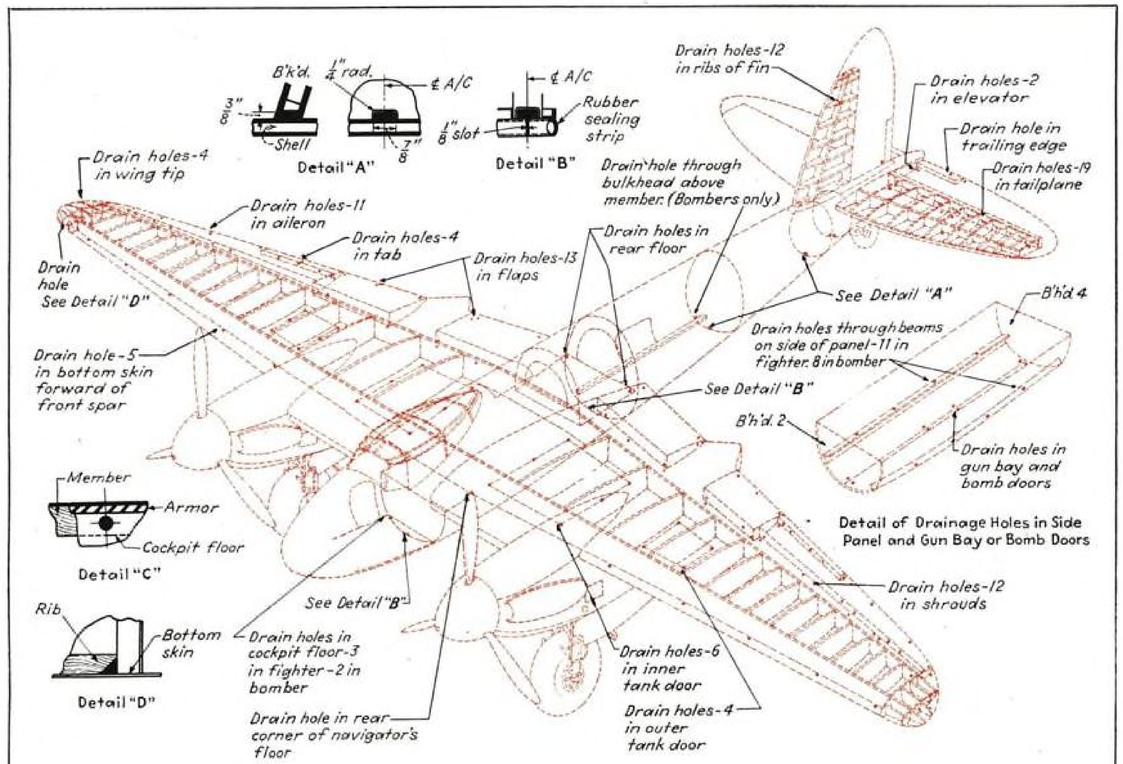

Location of drain holes. (An all wood airplane, although protected by paint, must also be perfectly drained. Even parts not exposed may absorb moisture condensed within, so that every point of possible collection must be included.)

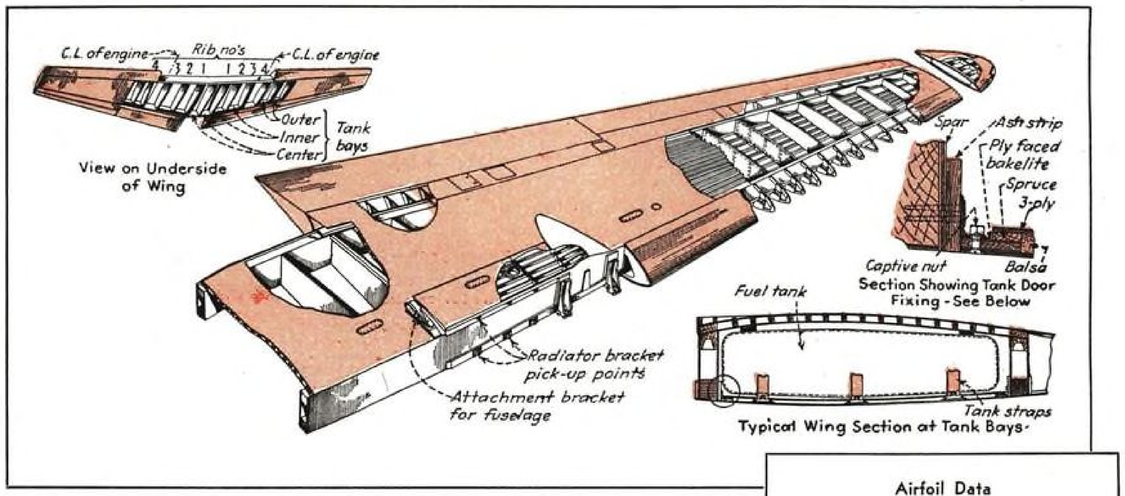

It is built up as a single unit to which the wing tips, leading edges, and control surfaces are added. The all-wood fuselage is lowered on top of the center section, to which it is secured by four pick-up bolts and a centering bracket.

Briefly, the wing from tip to tip is built upon two huge box spars with 0.25-in. plywood webs and laminated spruce flanges. Top of the wing is of double thickness reinforced by spanwise Douglas fir stringers sandwiched between two layers of 0.25-in. 5-ply birch. The leading edge, of

Airfoil Data

Root airfoil, Piercy Modified Section RAF 34
Tip airfoil, Piercy Modified Section RAF 34
Root chord (outboard of airplane centerline) .....25 in.
Tip chord (outboard of airplane centerline) .....300 in.
Wing area (net).....440 sq. ft.
Angle of incidence.....Plus 1½ deg.
Dihedral (measured on top face of front spar)...1 deg. 24 min.±10 min.
Sweepback at rib No. 4.....2½ deg.
Aspect ratio.....6.67
Aileron area (two ailerons)..34.4 sq. ft.
Aileron location (distance from fuselage side to centroid of aileron area).196.2 in.
Aileron static balance, approx. 6 percent mean
Trim tab chord (chord aft of aileron hinge line is 0.8 in.).....4.3 to 4.5
Trim tab span.....41.37 in.
Trim tab area (each tab) 1.1 sq. ft. (total 2.2 sq. ft.)

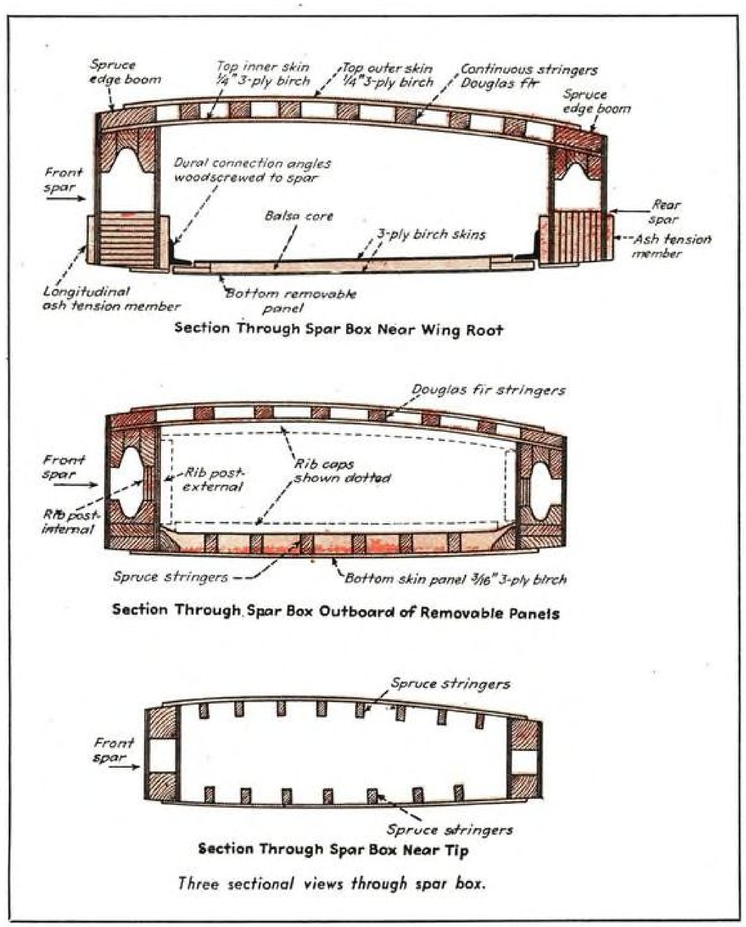

Three sectional views through spar box.

formed ply-wood, is attached to the front spar. Bottom of the wing, composite in construction, provides openings through which the tanks may be introduced. These are closed by stressed skins bolted to the spars and to adjacent ribs.

From the outermost fuel tank to the tip, the plywood under-skin is permanently secured to the wing and also reinforced by spanwise spruce stringers. The complete wing is glued, screwed, and bolted together and when finished is fabric covered, doped, sanded, and painted until it is exceedingly smooth. The flaps and ailerons and their fairings are attached to the rear of the spar box.

The section of the wing spar box varies at different points along the wing span. Typical section between the center of the wing and rib No. 6 is shown in Fig. 6A. This part of the wing takes loads from the fuselage, fuel tanks, engines, and undercarriage. The top section is made of two plywood panels with stringers running lengthwise between the panels. The bottom section is composed of detachable panels made as plywood-balsa sandwiches.

The box spar section of the wing between ribs 6 to 12 is shown in Fig. 6. Top skin is of the same construction as between the center and rib No. 6; bottom skin is fixed and made of a single panel of plywood with longitudinal stringers. From the 13th rib to the wing tip there are only single plywood skins on top and bottom of the wing.

Each spar consists of two flanges of booms, top and bottom, joined by two 0.25-in. 5-ply birch webs on each side. These vary in height from about 16 in. at the root of the wing to about 5 in. at the wing tip end. In plan view, the spars also taper from root to tip. The front spar varies in width from 4.37 to 1.26 in. At the bottom edges of each spar in the load carrying section long 4-ply-ash tension strips are added for reinforcement. Top flanges of both front and rear main spars are made from three laminations of 1.5-in. thick spruce, scarfed and spliced together vertically in the thickest section. Flanges are approximately 4.37-in. wide and 3.62-in. deep. They are lightened between the points of rib attachment by spindled slots approximately 2.12-in. deep, with 3.62-in. openings, and with 25-deg. tapered sides.

Lower flange of the front spar is made of 0.4-in. horizontal laminations. In the rear spar, the lower flange has vertical laminations in order to facilitate fabrication. The front spar is practically straight all the way across the wing. The rear spar, although parallel to the front one throughout the center section of the wing for about 5 ft., sweeps forward at an angle of about 10 deg. on either side of the mid-section and also upward at an angle of about 3 deg. The vertical laminations in the rear spar are more easily formed to these angles.

On the face of the front spar, hardwood or Bakelite packings are used to distribute pressure of the metal brackets that support the engine and landing gear. On the inside of the rear spar, similar packings are provided where the landing gear brackets are attached. Space between the vertical 3-ply sides of the spar is filled in at each main rib, also wherever a bracket is applied. Additional vertical spacers are found at ribs, 1, 3, 4, 6, 9, 14, and 16, and between 11 and 12. Where possible the upper flange is spindled out between them.

The lower front flange is built up in three sections, the major one at the center with horizontal 0.4-in. laminations that extend approximately to rib No. 6. Then three heavier laminations are used until the spar becomes a solid piece from rib 12 to the tip. Long scarfs of 1/15 ratio are used at

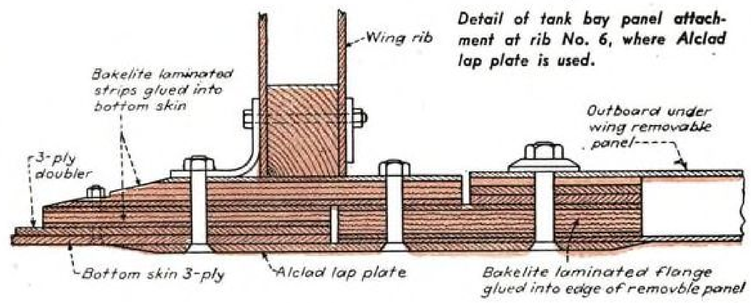

Detail of tank bay panel attachment at rib No. 6, where Alclad lap plate is used.

the transition points. Provided at rib attachment points on the inside of the wing spars are 1-in. square vertical spruce blocks. These are screwed through the plywood to a similar block on the inside, at points where the screws do not enter either the top or bottom boom. The ribs are glued and screwed to these spruce blocks. The plywood web grain runs diagonally when the spar is in its horizontal position.

Double Skin on Wing

Top skin of the wing is made up of two ¼-in. 3-ply birch skins separated by 1.3-in. maximum thickness Douglas fir stringers that extend spanwise from tip to tip. At each edge there is a wide spruce boom (between the two skins) that is superimposed over each spar, thus adding to their strength. In between the wide-edge booms fifteen narrow Douglas fir stringers are equally spaced. At the center section of the wing they are parallel to one another, but outboard of the fuselage, although equally spaced, all incline together at different angles. For reference purposes they are numbered from 1 to 15, No. 1 being the first aft of the front edge spar.

These stringers have to be bent at something less than 10 deg. between wing ribs 1 and 3. They are spliced in this section to facilitate making the bend, also increasing their effective width at this point where maximum strength is needed. Stringers 1 to 4 and 11 to 15 are 1.0-in. wide, while 5 through 10 are 1.6-in. wide. At the root of the wing they are spaced approximately 4.37 in., center to center. At rib 3 the spacing, due to wing taper, has been reduced to about 3.82 in. Outward of rib 6 all 15 stringers are the same width, 1.0 in. Incidentally, rib 6 forms the outboard wall of the most outboard fuel tank. Between ribs 8 and 9, stringers 7 and 13 terminate and stringers 4 and 10 end on rib 9, so that only 11 pass beyond this point. At rib 11 all stringers have been reduced to 1.0-in. thickness and 0.75-in. width. At this point the 1.0x0.5-in. stringers start, and spacing is about 2.30 in. Spruce is specified for the 0.75- and 0.5-in. stringers instead of Douglas fir. Between ribs 13

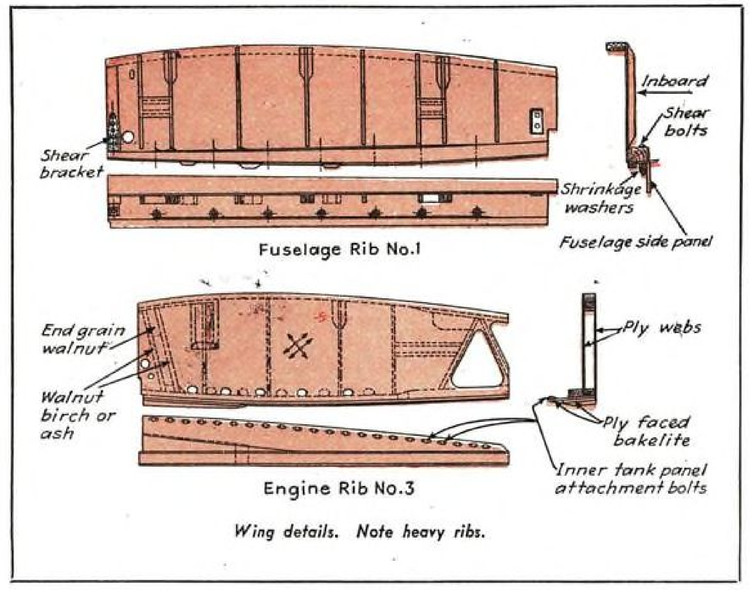

Wing details. Note heavy ribs.

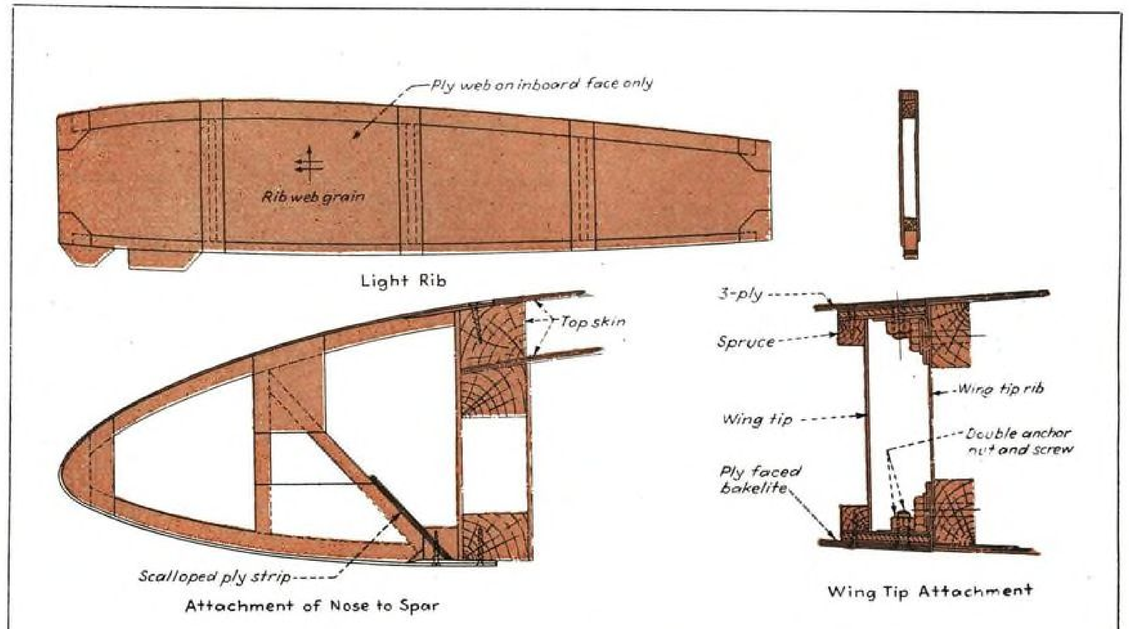

Light ribs and attachment of leading edge and wing tip.

and 14, stringers 1, 6, and 12 terminate, while between ribs 14 and 15 stringers 3, 9, and 15 stop. This leaves 2, 5, 8, 11 and 14 to end on wing tip rib No. 16.

The stringers are separated by wood blocks over ribs 1, 3, 4, and 6 and the top skin is bolted through to the rib at these points. Elsewhere the top and bottom skins are screwed to the stringers after gluing. Screws are put in at intervals of 3 in., the upper and lower skin screws being offset 1.50 in. to distribute the load evenly and prevent interference. At ribs where there are through bolts, the wood screws are left out.

Double top skin ends between the 12th and 13th ribs. From this point outward there is only a single top skin. Near rib 8 the single top skin is spliced into the top dual skin with a full 3-in. scarf.

The single under skin, 0.187-in. thick, is made from 3-ply birch reinforced with spruce stringers. This skin extends from rib 6 to the wing tip and is glued and screwed permanently in place.

The bomb bay doors enclose the center section of the wing from port rib 1 to starboard rib 1. From rib 1 outward, both sides of the wing follow the same pattern so that description of one serves for both. The space between ribs 3 and 4 forms the wheel well. Between ribs 1 and 2, 2 and 3,

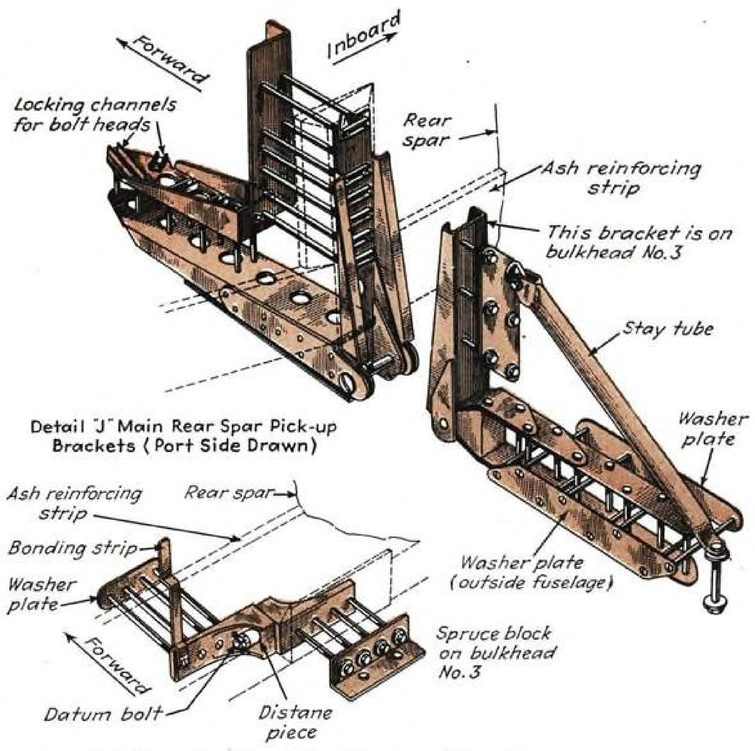

Metal fittings which form lower rear connection between fuselage bulkhead No. 3 and lower rear edge of rear wing spar.

4 and 5, and 5 and 6, four fuel tanks are suspended from the ribs in each side of the main wing. The landing gear is enclosed by a metal fairing, hence this portion of the wing bottom surface does not have to be covered. The four fuel-tank access openings, however, must be closed.

One cover panel serves to enclose the two fuel tank openings inboard of the wheel well; a similar one protects the two outboard tanks. These give a perfectly smooth bottom to the wing where they are attached, since flush screw heads are provided and the edges are faired into the wing.

Like the fuselage, the tank-bay covers are plywood and balsa sandwiches. The main constructional feature is use of laminated fabric reinforced Bakelite sheets having a 0.050-in. birch veneer facing for bolting strips. This permits gluing Bakelite to edges of the tank-bay panels and to bottom skin of the wing where the bolted joint is made. The Bakelite has a bearing stress value of 35,000 psi. and provides a non-crushable bearing for attachment screws. For further protection and strength, Alclad lap plates are provided, with three rows of countersunk bolt holes for the joint along the edge of rib 6. The nuts are held captive with metal covers riveted to structural rolled aluminum angles. These angles are fastened to the inside faces of front and rear spars by wood screws. The angles are made up in 1-ft. lengths and each carry four fastened nuts. Dividing these angles into sections allows for any expansion or contraction of the wood. The angles are mounted in the 3.0x0.5-in. ash tension members at the lower edge of each wing spar.

Attachment nuts along bottom edges of the ribs are riveted to wood ply-faced Bakelite flanges glued to the ribs The intermediate rib between the fuel tanks also has a series of fastened nuts, so that the center of each panel is secured by bolts, with bottom of the rib accurately positioned. These Aerotight nuts are fastened either with wood screws, rivets, or bolts.

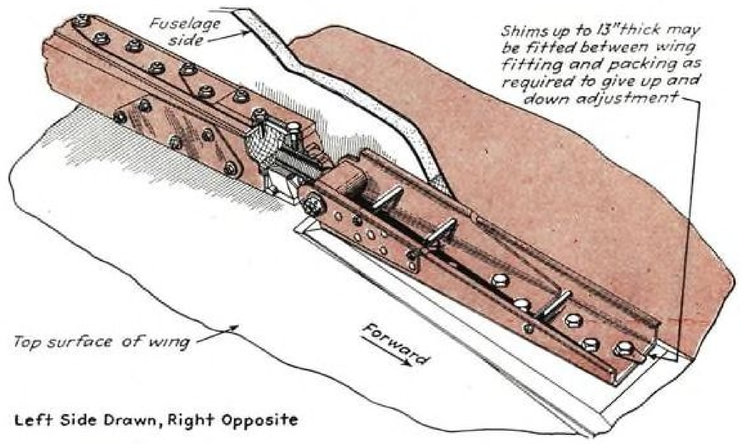

Front attachment joint between wing and fuselage, showing metal bracket fastened to front rib of pickup member and bracket bolted to wing above front spar.

Wing Ribs

There are three types of wing ribs: No. 1 or fuselage rib, the double sided or box type ribs such as are used on each side of the wheel well, and the open faced or light ribs.

No. 1 ribs come just inside the fuselage contour and carry shear bolts which support the fuselage side panels below the wing. The web of these ribs is 3-ply birch 0.25-in. thick. They are reinforced with spruce flanges top and bottom, also by retangular vertical stiffeners. The bottom flange carries a Bakelite reinforcement connection strip, to which the inboard edge of the inner fuel tank cover panel is bolted.

The box type ribs are made with two 0.187-in. 3-ply birch sides and have walnut, birch, ash, or spruce stiffeners, depending on their location and purpose. Engine rib No. 3 is typical. The stiffeners are all grade-A spruce, and except for the top one they are all solid. The top flange is made from 0.27-in. spruce laminations and is approximately 0.8-in. deep over its full length. The lower flange averages 1.3-in. deep. The solid spruce vertical stiffeners are 0.4-in. wide. Outside width of the rib measures 2.0 in. Semi-circular cut-outs are provided in the side panels through which the Aerotight nuts can be inserted. Bolts that go through the upper double-skin catch the nuts inserted in the top flange of this rib. Nuts holding the lower panel are inserted through similar holes in the web above the bottom rib.

To distribute load, the cutouts are alternated, first on the left web then on the right. The bolt holes are spaced approximately 3 in. apart. Spacing of the screws that clamp the rib stiffeners and side panels together is also kept at about 3 in. Ply-faced Bakelite is glued to the bottom to carry the tank panel fastening nuts. These are omitted on double panels where they bear against underskin stringers instead of against a tank door.

Single web ribs are made in two weights: Those for ribs 7, 8, 12, 13, and 15 have a 3-ply 0.0625-in. thickweb; the others have 0.078-in. webs. All are made from 3-ply birch with the web located on the inboard face. The top and bottom flanges are solid spruce. The lower one varies in depth from 0.6 to 0.7 in. by 0.7-in. width. The top flanges vary from 0.97 to a 0.65-in. depth. The 0.4x0.7-in. vertical stiffeners are each reinforced by a 1.4x⅛-in. 3-ply piece glued and bradded to the exposed side. Triangular gussets, also of 3-ply birch, are provided at corners of the rib.

There are 16 ribs on each wing, not counting the double-sided box-type rib which is located at the center of the ship. The latter is used to help support the bomb racks. Ribs on each side of fuel tanks and wheel wells are box type. There are also two other box type ribs, Nos. 8 and 14. These are located at critical points, the first where aileron control reactions take place, the latter at the outboard aileron support.

Wing tips are bolted in place just like the tank bay doors, with flush screws that engage captured nuts on wing end rib No. 16. These nuts are held by an aluminum cuff bolted to the wing end rib. The wing tip has a spruce and laminated plywood rib that matches the wing and rib. Feature of this construction is provision of ply-faced Bakelite reinforcements all around the attaching point so that screws will not crush the tip or wing end at the joint when they are tightened up. The wing tip itself is constructed with a plywood outer skin glued and screwed to spruce formers and to a triple laminated spruce edge that gives the tip its proper contour.

Leading Edge

The leading edge of the wing is made up in four sections. Two of these, one right, the other left, extend outboard from engine nacelle to wing tip. They are slipped over the forward side of the front wing spars and screwed and glued in place. When as-

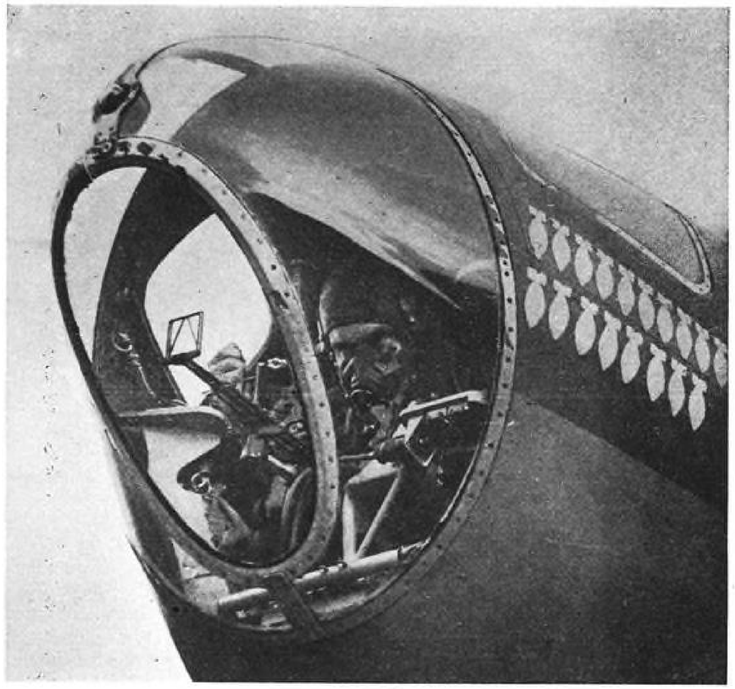

Plexiglas nose of "Mosquito" Bomber. Bombs painted in side show number of missions flown. (Chas. E. Brown photo.)

sembled, they become a fixed portion of the wing unit. Each leading edge consists of a series of spruce nose ribs reinforced by 3-ply wood gussets and a longitudinal scalloped plywood strip set in at a 45-deg. angle. This structure is then covered with a pre-formed plywood skin that fairs into top and bottom skins of the wing.

Between engine and fuselage the second section of leading edge has been developed so as to form a housing for oil and liquid coolant radiators. It is constructed of 24ST Alclad sheet. The leading edge has a fixed opening that forms a duct through which air passes to the radiators. The rear bottom portion of each cooling unit has a two-position flap to control flow of air through the radiators.

Design Analysis of the deHavilland Mosquito *will be concluded in June* AVIATION.

Mounting of fuselage on wing. Truck jacks carry wing underneath, pickup pins are inserted on No. 3 bulkhead and rear wing spar, and fuselage is then lowered into place.

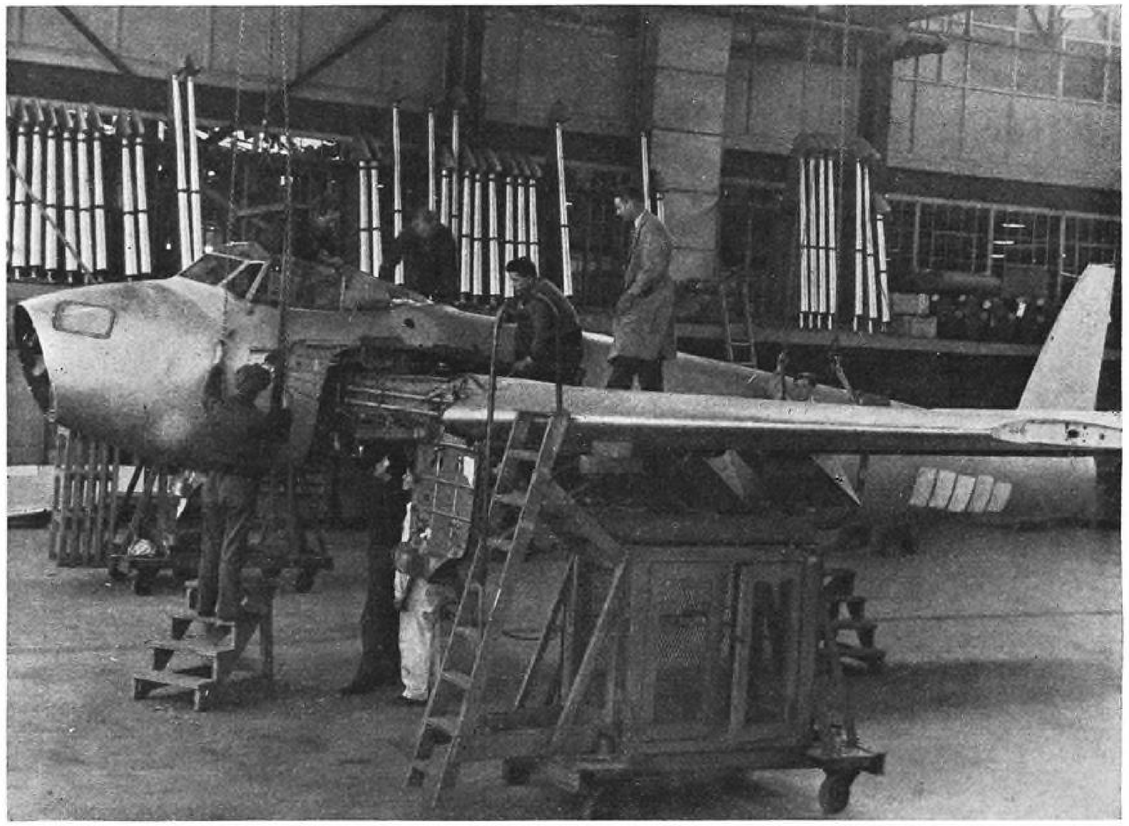

METHODS FOR DETERMINING AIRFOIL PRESSURE DISTRIBUTION*

By **MONROE A. MALLER,** *Hughes Aircraft Co.*

Specially collated for those who may be called upon to apply experimental data obtained from tests, here are the practical steps required in estimating airfoil pressure forces. Particularly treated are mechanics, test equipment, and wind tunnel models.

IN STRUCTURAL DESIGN AND ANALYSIS, the role of pressure distribution is an important one. Accordingly, the purpose of the following discussion is to provide a review of the fundamentals involved and their relation to the conception of pressure distributions.

It is first necessary to define a few physical quantities the significance of which will become evident as our discussion proceeds:

Since air is a gas, its *pressure* is of prime importance. Pressure is defined as *force per unit area,* which then fixes the definition of *force* as the *summation of pressures over a given area.* In a moving stream of air, application is made of two types of pressures which also justify definition. One of these is the *static pressure* of the air, which is the pressure due to the weight of the air alone. The symbol for static pressure is the letter p. The second type of pressure is called *dynamic pressure*—the pressure due to the velocity of the air alone. Obviously, when the air is still, the dynamic pressure is zero. The symbol for dynamic pressure is q, and its value is given by the expression —

$$q = \tfrac{1}{2} \rho V^2 \qquad (1)$$

where ρ is the mass density of the air in *slugs per cubic feet,* and V is the velocity in feet per second. The slug is a fundamental unit of mass and is expressed by weight divided by acceleration due to gravity, i. e., W/g. For air, the specific weight of which is 0.07651 lb. per cu. ft., the density in slugs is 0.07651/32.1740= 0.002378.

Sum of the static and dynamic pressure in a uniform horizontal flow is known as *total head pressure,* or more simply, *total head.* In equation form the sum is written —

$$p + q = H \qquad (2)$$

that is, the well known Bernoulli's Equation for incompressible flow which states that the sum of the static and dynamic pressures is a constant along any streamline. In wind tunnel testing it is customary to refer to the value of undisturbed total head in the test section as free stream total head, and it assumed conveniently that the value of total head is constant in a plane normal to the undisturbed flow.

One important property of pressure is that *a pressure is equally exerted in all directions.* This fundamental principle is very important in its applications.

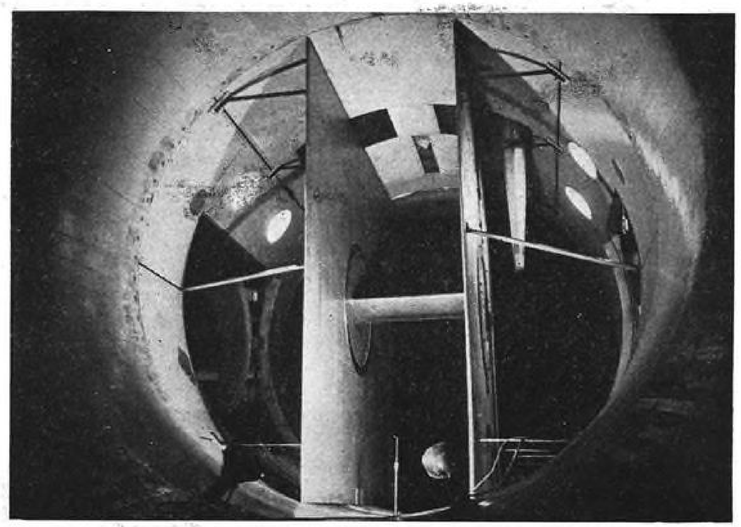

Fig. 1. Two-dimensional test sections rigged into Galcit wind tunnel.

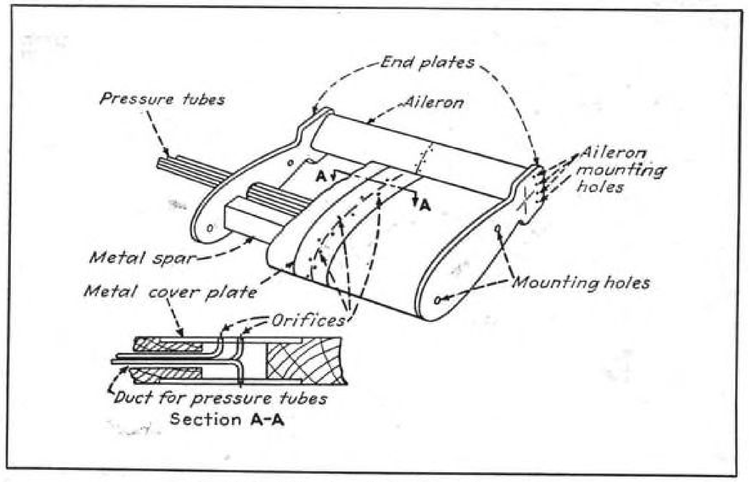

Fig. 2. Details of small-chord two-dimensional panel, with self-contained pressure orifices.

* Prepared by the author during his association with Consolidated Vultee Aircraft Corp.

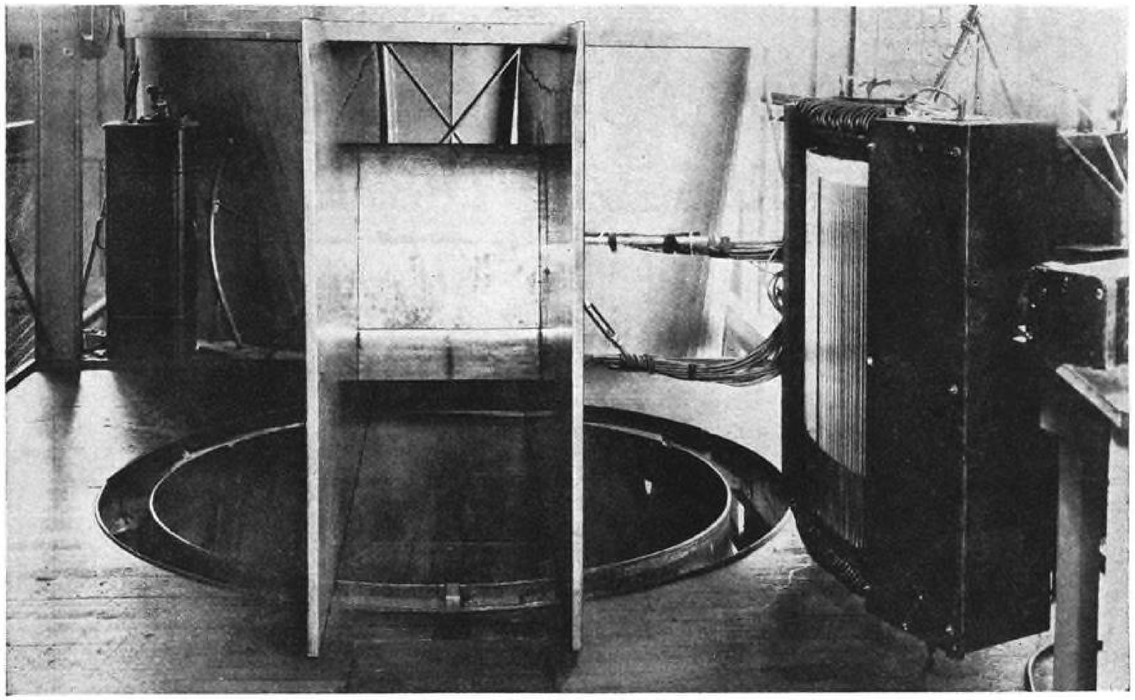

Fig. 3. Test arrangement in NACA 5-ft. vertical wind tunnel. (NACA photo.)

With these few basic facts established, consideration is given to the experimental techniques employed in conducting pressure distribution tests.

Testing Technique

To obtain pressure distributions from wind-tunnel tests, it is necessary to construct special models. Because of the expense involved, these tests in the past were conducted only by those groups engaged in academic research or by a few of the larger aircraft manufacturers whose research allotments could defray the expenses.

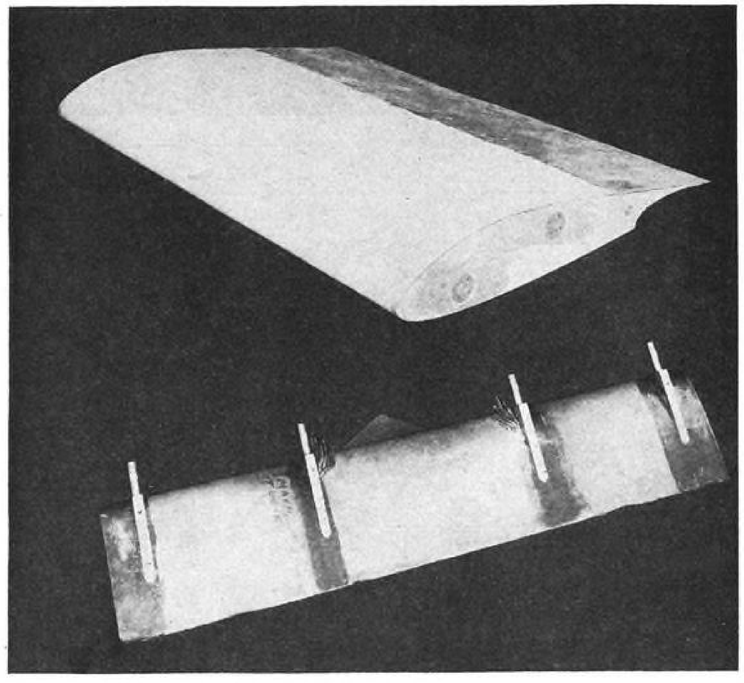

Fig. 4. Details of small-chord two-dimensional panel. (Convair).

The refinements in technique in this country, largely due to the work of the NACA, have been widely reported.[1] Measurements of airfoil pressure distributions have been nearly all two-dimensional, i.e., measurements of airfoils of infinite aspect ratio. In the usual three-dimensional wind-tunnel, these are accomplished by spanning a model of rectangular plan form across the test section. Where the size of the tunnel makes this impractical, a model of the airfoil is generally constructed with an aspect ratio of 6 and is mounted symmetrically in the tunnel; then the pressure distribution is taken about the midspan section of the model.

In either case, the angle of attack is corrected for the departure from true two-dimensional flow. This is done by computing the spanwise lift distribution, the details of which are not considered here. Suffice to say that from these computations, the vertical component of downwash velocity w, can be obtained, and the induced angle of attack in radians is—

$$\alpha_i = \frac{w}{V} \qquad (3)$$

which can then be reduced to the form—

$$\alpha_i = k\,C_l \qquad (4)$$

where: k is a constant

C_l is the section lift coefficient

The angle of attack for two-dimensional flow (infinite aspect ratio) is given as—

$$\alpha_o = \alpha - \alpha_i \qquad (5)$$

where α is the geometric angle of attack.

For pressure distribution tests, some of the big tunnels have been rigged with two-dimensional test sections in the regular working section. This is done by installing two large parallel plates extending from the floor to the ceiling of the test section and extending several chord lengths ahead and behind the model. These walls serve the two-fold purpose of, (a) reducing the span of the model, and, (b) rendering the flow between them nearly two-dimensional. The method is quite satisfactory, provided no adverse flow conditions are set up between the walls. Fig. 1 shows a typical installation employed by Consolidated Vultee during a series of tests in the Galcit tunnel.[2] It proved quite successful.

[1] Probably the most complete paper describing testing technique is NACA T.R. No. 563, "Calculated and Measured Pressure Distributions Over the Mid-span Section of the NACA 4412 Airfoil Section", 1936.

[2] Guggenheim Aeronautical Laboratory, California Institute of Technology.

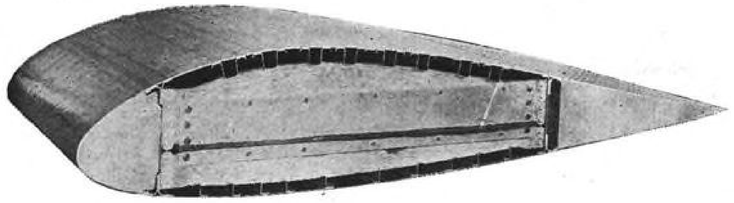

Fig. 5. Two-dimensional test panel of "typical manufacture" type. (Convair photo.)

Two-Dimensional Models

The actual pressure distribution of an airfoil model in a wind tunnel is measured by means of a series of static pressure readings taken on both the upper and lower surfaces at various stations along the chord line. The technique used in measuring the static pressure is dependent on the type of model employed.

Our present discussion will be confined to two-dimensional airfoil models, of which there are two types. Substantially these are, (a) smooth surface models, whose primary purpose is in the determination of airfoil characteristics, and (b) large chord models, the construction of which is typical of actual production manufacture. The latter are primarily intended for drag tests but can be utilized in obtaining pressure distributions, as will be described later.

Construction of the smooth surface models is considered first. Principal components of this type of model are shown in Fig. 2. The metal spar is provided as an integral part of the structure, since large portions of the interior are removed to allow the pressure tubes to be led out. Pressure tubes are sweated into the cover plate, allowing a little of the tube to protrude beyond the surface. The protruding end is soldered closed and is then filed down until it is flush with the airfoil contour. Formation of the orifice is by drilling through the solder normal to the surface. Diameter of the orifice is usually .010 or .008 in. i. d. It is good practice to permit sufficient tubing to extend beyond the end plate to allow for breakage or crimping of the ends.

Component surfaces such as flaps, ailerons, and slats are usually constructed of metal. Orifices are located in these components by making spanwise grooves in the surfaces — grooves of a diameter slightly larger than that of the pressure tubing. The tubes (sealed at one end) are then laid in the grooves and sweated into place. Any chinks and discontinuities are filled in with solder, and the entire surface is then refinished so that the contour checks the master template. Orifices are then drilled into the sealed end of the tubing, normal to the surface.

Fig. 3 shows the application of a small-chord model with pressure tubing leading to the manometer. Fig. 4 shows some of the details of a typical small-chord smooth-type model.

Smooth-type models are also tested in chord lengths up to 5 ft. The larger models are used for tests at higher values of the Reynolds Number.

The "typical manufacture" model is intended to represent some portion of actual wing construction, and all external details, such as exposed rivet heads, lap joints, etc., are faithfully reproduced. No attempt is made to smooth out any of the manufacturing irregularities encountered in production. A model of this type is shown in Fig. 5. Tests on these models are primarily for determining the additional drag due to manufacturing irregularities, therefore pressure orifices are usually omitted from the construction. The pressure distribution is determined by exploring the surface of the airfoil with a so-called "mouse".

A "mouse" consists of a static pressure tube mounted on small brass feet attached to the surface of the model with scotch

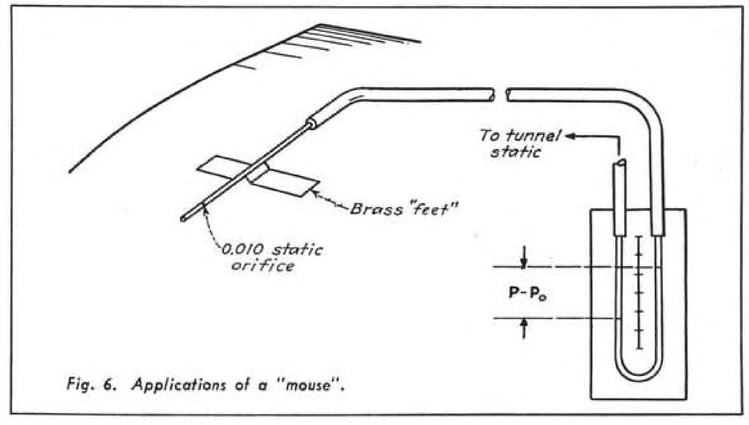

Fig. 6. Applications of a "mouse".

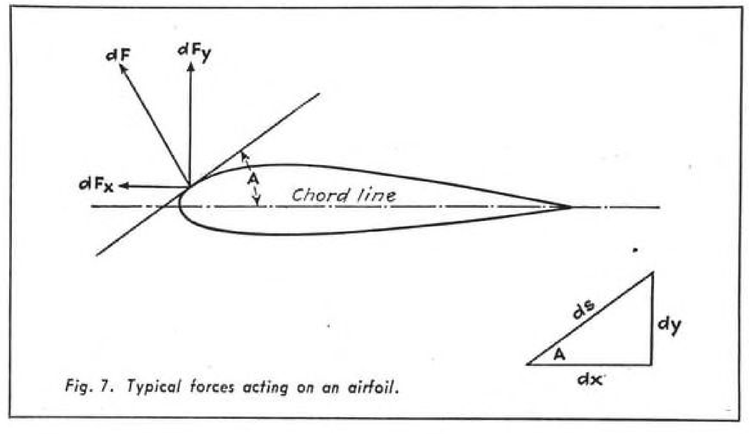

Fig. 7. Typical forces acting on an airfoil.

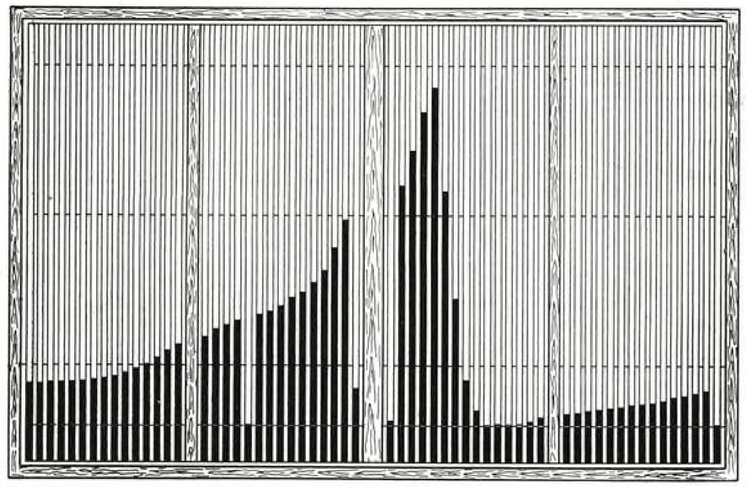

Fig. 8. Manometer board record.

tape. In application, the static orifice is located at various percentages of the chord, and the pressure is measured by connecting the mouse into the manometer, as shown in Fig. 6. Tunnel static is taken in the test section.

If the dynamic pressure q, is measured, using a manometer employing the same fluid medium as for the mouse, then the pressure coefficient P (to be derived later) is obtained by dividing $p_L - p_o$ (static pressure at the "mouse" orifice minus tunnel static) in inches of manometer liquid by q in inches of the same manometer liquid. "Mice" are inconvenient to use in that they require the tunnel to be shut down between measurements to permit relocation.

Other components of the airplane, such as wings (three-dimensional), tail surfaces, fuselages, etc., are adapted to pressure distribution tests by installing pressure tubes in a manner similar to that shown for the smooth surface models (cf. Fig. 2). Where this is impractical, the mouse method may be employed.

Mechanics of Pressure Distribution

Air flowing around an airfoil exerts a pressure at each point on the airfoil surface. This pressure is positive or negative, depending on whether it is greater or less than the static pressure of the air. A pressure distribution is merely a map of the pressure on an airfoil.

Consider an airfoil in a uniform stream, giving special consideration to some particular region on the airfoil, say on the nose. Let the region under consideration be an element of area of unit width and length, ds. Construct a tangent line through a section of the airfoil at the location under consideration, as shown in Fig. 7. The length, ds, lies on this tangent, and the force on the element is perpendicular to the tangent, as shown in Fig. 7. If p is the value of the net static pressure[1] on ds, then the force on the element has the value pds, which is noted as dF.

Further, if the tangent makes an angle A with the chord line as shown, then dF has components parallel and perpendicular to the chord line, and the values of these components are, respectively —

$$dF_x = dF \sin A$$
$$dF_y = dF \cos A \qquad (6)$$

From the triangle in Fig. 7 it can be seen that $\sin A = dy/ds$ and $\cos A = dx/ds$. Recalling that $dF = pds$, it follows that —

$$dF_x = p\,ds \times dy/ds = p\,dy$$
$$dF_y = p\,ds \times dx/ds = p\,dx \qquad (7)$$

The summation of *all the forces perpendicular to the chord line* along the x axis on both the upper and lower surfaces is called the *normal force*, and its value may be expressed in the general integral form —

$$F_y = \int p\,dx \qquad (8)$$

Similarly, the summation of *all the forces parallel to the chord line* along the y axis on both the upper and lower surfaces is called the *chord force*, and is given by —

$$F_x = \int p\,dy \qquad (9)$$

These integrals are evaluated graphically from wind tunnel test data. For the normal force, the integration is carried out parallel to the chord line between the leading and trailing edges. Chord-force integration is carried out perpendicular to the chord line between the maximum upper and lower ordinates.

(*Turn to page* 273)

[1] By net static pressure, the concept of a pressure difference over free stream static pressure is implied, since only an applied pressure difference can produce a force. This is not to be confused with the difference in pressure between the upper and lower surfaces.

Fig. 9. Pressure distribution data.

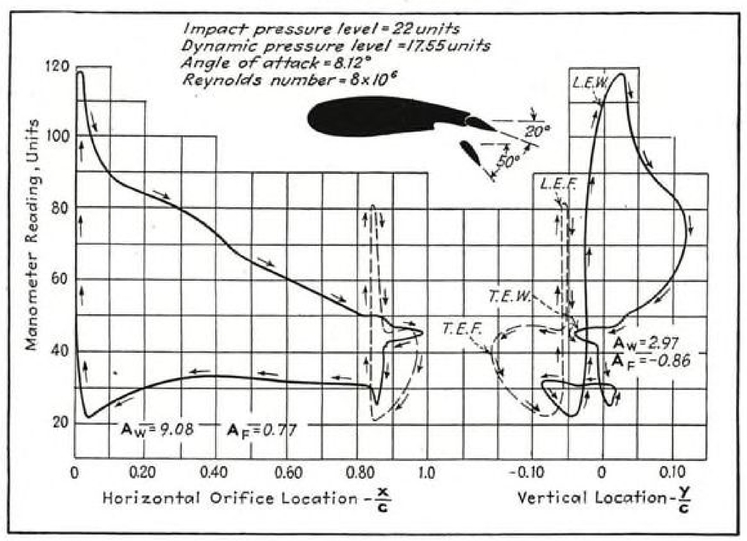

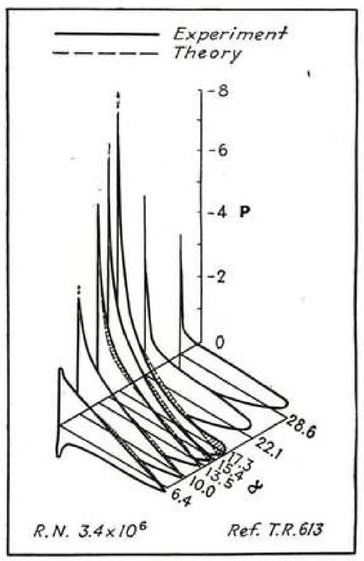

Fig. 10. Development of a stall, showing growth of separation.

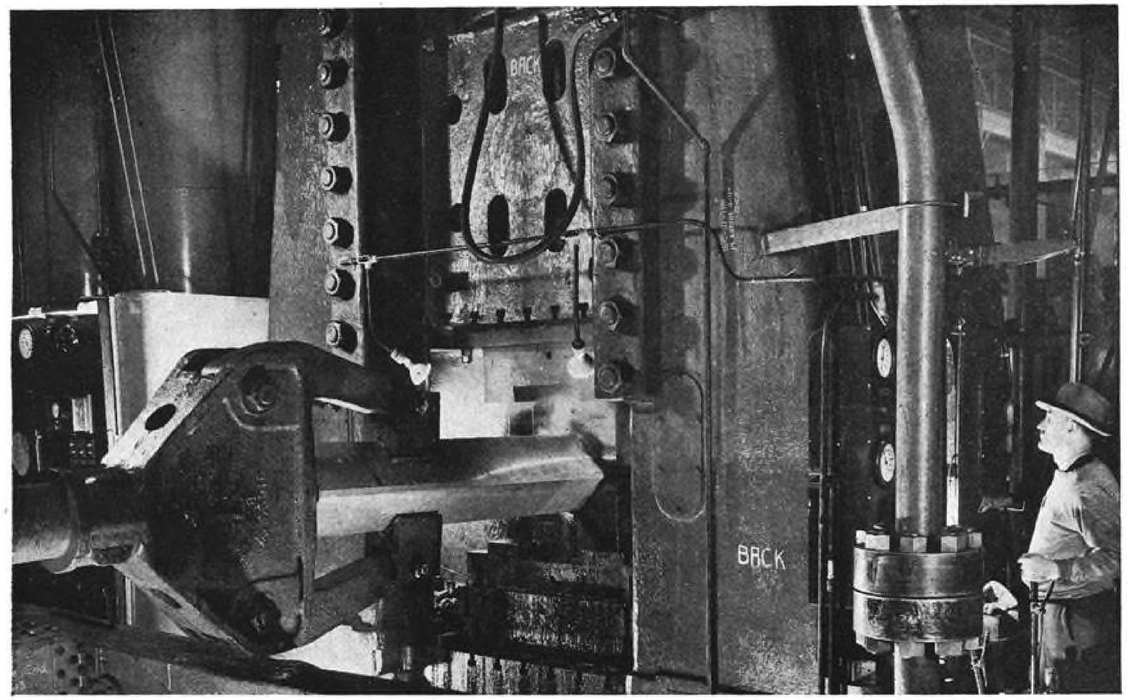

Manipulator holding ingot in V jaws of 3,000-ton hydraulic press. By using V-shaped jaws, capacity of press has been greatly increased.

FROM BILLET TO BLADE

Chevrolet (no longer making cars) now cogs aluminum ingots into billets. And Frigidaire (no longer making iceboxes) completely processes these blanks into Hamilton Standard propellers. Here's the detailed "how" of this high-production wartime teamwork.

FROM START TO FINISH, the making of forged aluminum blades for Hamilton Standard propellers is a precision job. How difficult it is to make these airscrews and why they are so expensive will be considered in this article.

First off, there are two distinct phases in production—the rough forging from a billet and the machining to produce a finished product.

One of the outstanding aluminum forging plants in the country is that operated by Chevrolet, where aluminum ingots 1 ft. sq. and 9 ft. long are cogged down into the billets from which the smaller aircraft forgings can be made. The end product of these billets may, at this plant, be radial engine crankcases, aircraft parts, or the rough propeller blades in which we are interested.

From the forge plant, the rough blades go to Frigidaire. There they are completely machined, painted, and balanced ready for assembly. Frigidaire methods are doubly interesting because they show how a high unit production plant applied its methods and conveyors to making war products after conversion from refrigerators. The absence both of trucks and of men moving in the aisles instantly impresses any visitor. It is hard to realize that everyone is busy and that the plant is running at top production. All material is moved by overhead conveyors, so there is no reason for any worker to leave his machine.

Forging Process

At the Chevrolet plant, one of the most interesting machines is the 3,000-ton capacity Wood hydraulic press. This press is operated by hydraulic pressure so that the aluminum is allowed to flow while being forged instead of being hammered. The ram operates under 4,500 psi. Two 300 hp. electric motors driving 100 gpm. triplex pumps are required to maintain this liquid pressure. Four air-over-fluid accumulators, 24 ft. high with 6¼ in. steel walls, hold the pressure. Each accumulator or "air bottle" weighs 32 tons. To maintain the air pressure, a triple stage compressor drawing 100 psi. shop-line air steps it up to 4,500 psi. It takes 48 hr. to charge the accumulators.

It is interesting to observe that the two 300-hp. water pumps can maintain the pressure while operating the press, but 4,500 hp. would be required continuously if the accumulators were not used. The tremendous pressure exerted when the press is in operation, heats up the hydraulic liquid so much that it has to be passed through a heat exchanger after release; 7,500 gal. of hydraulic fluid stored in three 28 ft. high and 4-ft. dia. tanks is required to cool fluid to the pumps.

When the press is in operation, the 1,500 lb. cast aluminum ingots are heated for 3½ hr. to 720 deg. F. in the adjacent furnace. Then each is picked up by the huge manipulator tongs and cogged down in the hydraulic press. In this operation, the tensile strength of the ingots, (about 39,000 psi.) is increased by the working of the metal to around 55,000 psi. A time-saving feature unique in this Chevrolet installation is mounting of the billet turntable on the front of manipulator bridge instead of on the floor. Cogged billets, cut up in sheet lengths, are used for crankcase sections and other aircraft parts.

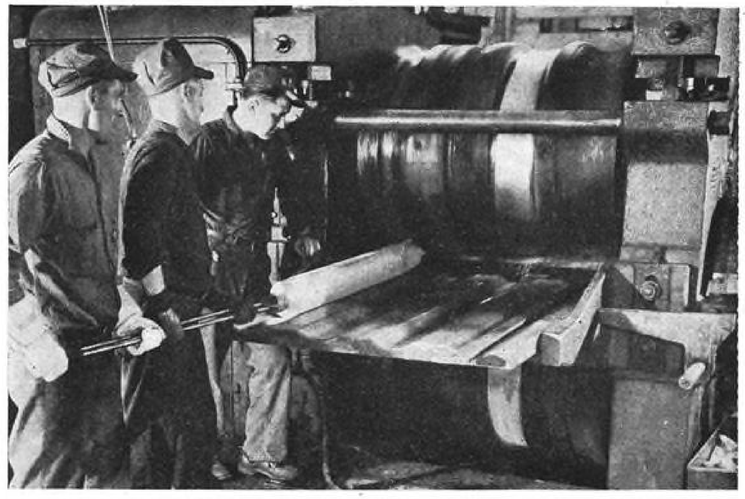

Ajax rolls shape round stock into rough blades. Note different profiles on roller for progressive steps in operation.

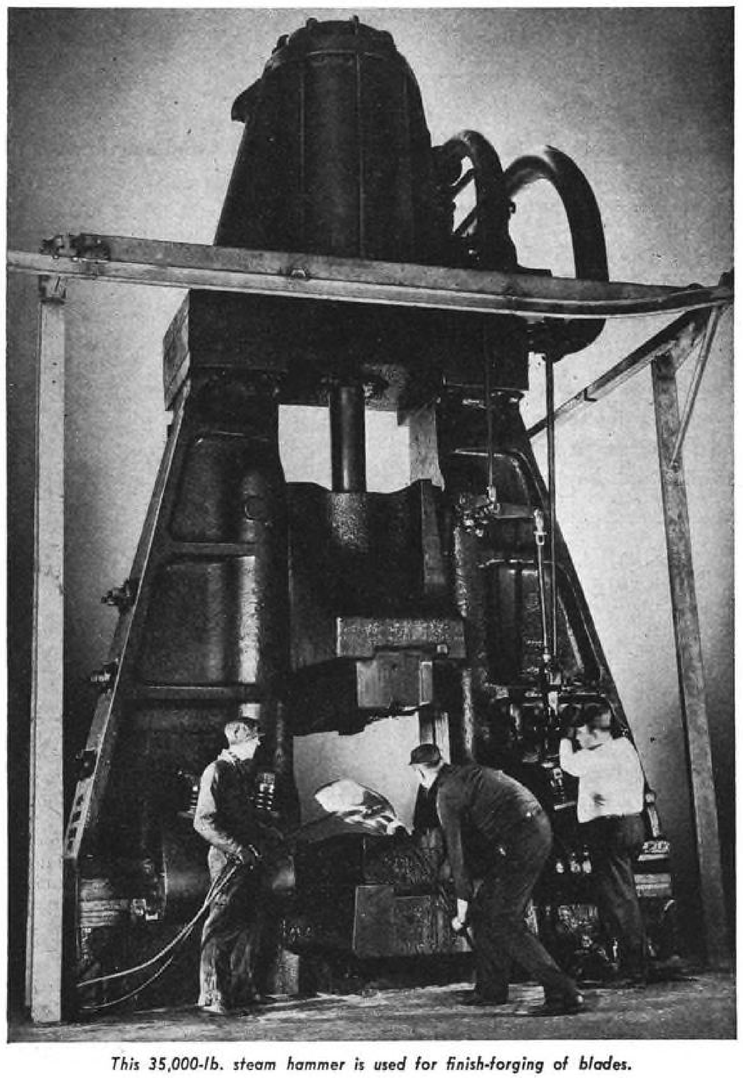

This 35,000-lb. steam hammer is used for finish-forging of blades.

One of the most interesting jobs at the forge plant is the volume production of aluminum propeller blades which *does not* involve the use of the Wood press. Four different models of blades are forged.

From 6 or 8 in. dia. aluminum billets, the right length of stock is cut off to provide sufficient material to form the size of blade being made. Belt-driven abrasive-wheel cut-off saws are used for this purpose.

Next the stock length of aluminum bar is centered on one end, then chucked in a Duomatic lathe which has two carriages so that the entire piece can be "scalped" to size in one operation by the tool on the near side while the tong "hold" is turned down by tools held on the carriage opposite. Stops are provided on the tool post so the "hold" end can be turned down in steps and no measurements have to be taken. This makes it easy for two men to turn out 20 units per hour.

The "scalped" billet is heated to 850 deg. F., then taken to a four step Ajax No. 5 roll swaging machine, where the round section of the billet is gradually flattened out. A progressive operation, this requires two men to handle the hot billet and a roll operator who knows just how far to feed the piece into the rolls at each stage.

After this, the semi-flattened piece is reheated and put under a 35,000 lb. Erie steam hammer. The blade is forged to size, and the flash is then removed by a special die mounted in a Bliss press beside the steam hammer.

At this point, "hold" on the shank is cut off with a Tannewitz band saw. Both the blade and the hold, which later becomes a laboratory test coupon, are stamped with identifying numbers. From this point on, the hold and blade go through the subsequent heat treating cycles together.

The shank is again heated preparatory to putting on the steel-roller thrust-bearing races and upsetting the end of the blade. This is an unusually ticklish job since there is so little clearance between the thrust rings and the jaws of the upsetting machines used to put the bulbous end on the blade shank.

With the forging complete, it is now necessary to heat treat to obtain maximum strength characteristics. The first step is the "solution treatment" for 12 hr. in an electric furnace, half of the time being required to bring the blades up to the soaking heat of 960 deg. F.

In 20 sec. or less after they come out of the electric furnace, they must be quenched in water. This "fixes" the metal structure obtained in the heat treatment. The tang cut off of each forging is wired to its blade and goes through exactly the same heat treatments as the blade itself. The blades are suspended from "merry-go-round" rings which allows compact, round-type electric furnaces to be used. This also assures the minimum blade distortion when quenched, for the water hits each side of the blade equally as it is immersed.

After quenching the blades have to be aged. This is called "precipitation heat treatment". A Ross mechanized furnace 175 ft. in length is used for this purpose. The blades move about 2 in. per min. and take 16 hr. to complete a cycle through this furnace. About half the time is required to bring the blades up to the aging temperatures of 340 to 350 deg. F., then they are kept at this temperature for 8 to 8½ hr. This gives additional strength to the forged aluminum blade.

Inspection follows on each blade before it is shipped to the shop where it is to be machined. A tensile test specimen is turned from part of each tang. Another portion of the tang is analyzed chemically or with a spectroscope. With small bench lathes and tensile test machines, girls turn and test samples of every individual blade.

Forgings which pass inspection are now cleaned up with manual electric grinders, then inspected for visible mechanical flaws or dimensional variations before they are shipped away.

Machining at Frigidaire is the final step in production. Guided by years of experience in high unit production, this organization has developed new methods which have almost halved the man hours required per blade. Material handling has been reduced to minimum by utilizing the overhead conveyors formerly required in the manufacture of electric refrigerators.

The blade forgings are received from Chevrolet with the finished roller thrust-bearing races in place. These rings are carefully protected from damage in shipment, also during the machining of the blades, by a metal snap cover.

Before any machining is done, the bulbous end of the shank is tested for hardness. This is vital since this "upset" must carry the entire centrifugal and torsional loads on the blade. Therefore no machine time is lost by machining a blade which is unsafe. In its rough condition, a blade can be reheat-treated and probably saved—instead of scrapped as would be the case if any machine work were done on it while in the soft condition.

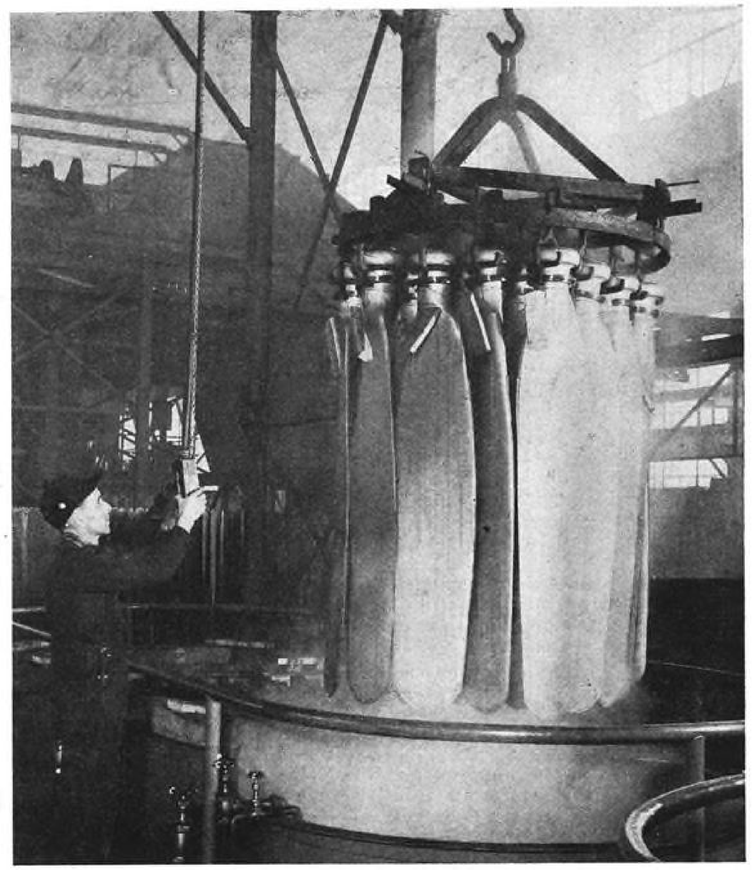

After shank ends have been upset they are heat treated and quenched in this tank. Note blade test samples wired to respective shanks from which they came.

Equal care is taken to make sure the roller bearing faces have been unharmed during the blade upsetting or by the blade heat treatment which followed. This check is done on a special Magnaflux machine.

The first production operation is to put a center in the tip, then bend the blade to a template. Locating the blade by the tip center and the shank, the bottom end

Dimensional checks are made to determine center line and to insure that sufficient material is included for all subsequent operations. (This and preceding photos by General Motors.)

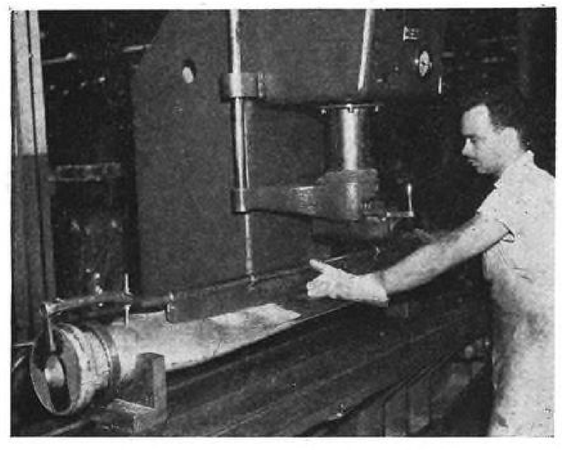

Using center in tip and centerline on face, operator of straightening press uses template to check blade while bending it. (This and subsequent photos by Frigidaire.)

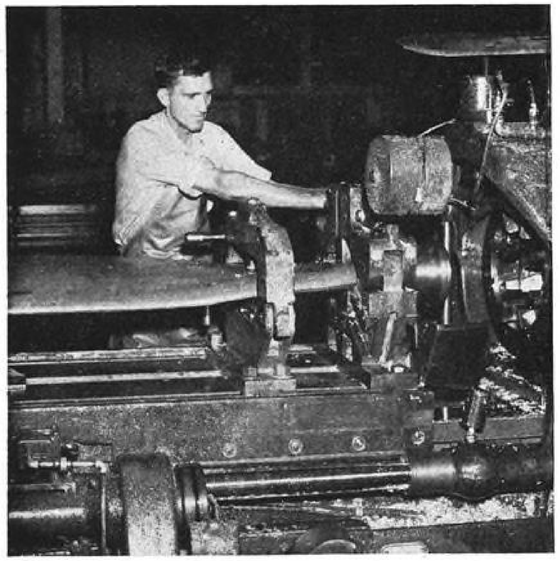

Blade shank has just been contour-milled in Hall planetary, providing first machined locating point.

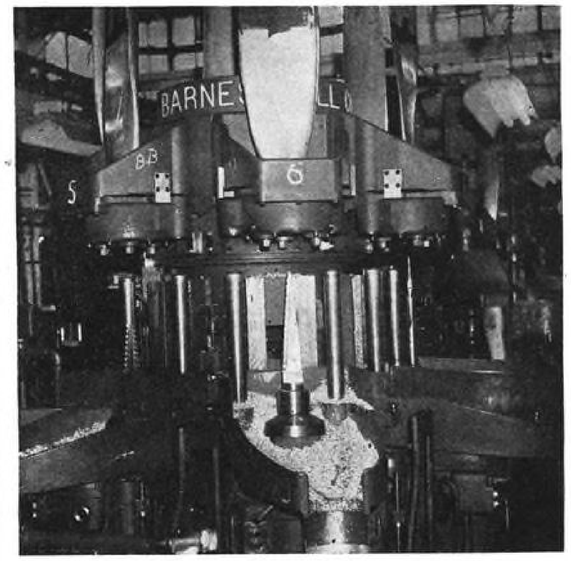

Inverted drilling machine in which drills operate from below blades, permitting chips to fall clear by gravity.

of the blade is contour milled on a Hall Planetary—one of the big time savers, for it immediately provides a machining point on which the blade can be accurately located for subsequent operations.

This is typical of the many machined operations, all of which work to finish the blade as nearly as possible to the final dimensions. With new type cutters and higher cutting speeds, Frigidaire has been able to machine blades closer and include parts that formerly had to be hand finished . . . Inspection was another difficult problem in man hours, so new and faster inspection fixtures were developed . . . Drafts and air currents from the heating and ventilating equipment caused much lost time and scrap on the blade balancing operations throughout the plant. Accordingly, blades are now balanced in a draft-preventer cage made from transparent plastic sheets . . . Automatic machines—one a mill for the blade tip, the other to mill the contour of the edges—have saved many man hours at a time when the company was "scraping the bottom of the barrel" for manpower.

Basically the operations in machining the blade are as follows: Inspection, finding of center line, and cutting center in tip, straightening if necessary to correct for warping during heat treating. There follows form-turning of the outside of blade shank and, with this locating the blade, boring of the deep tapered hole in the blade shank on a multiple spindle inverted drill (form drills that look like milling cutters are used for this purpose). Next the blade is put in a twister and given the correct angle if it has warped out of shape. The operator checks the blade while it is on a surface plate, marks it, then twists it more than required so as to allow for spring back. Again it is checked with a template to see that the blade is straight lengthwise.

After this preparation, machining starts on the face of the blade. From the tip to about the 36-in. station the face is machined with a Berliner. Then the blade goes to the copy mill and the blade and shank are machined all over, using a master blade as a guide. Direction of rotation and feed are reversed on this machine so the chips can be caught in the scoop and the cut started out on the blade instead of from the shank. By this method no portion of the blade to be machined is effected by warping, as is the case when the cut is started from the shank end. The cutter speed is doubled and only four carbide-tipped cutters are used (instead of a dozen or more) so

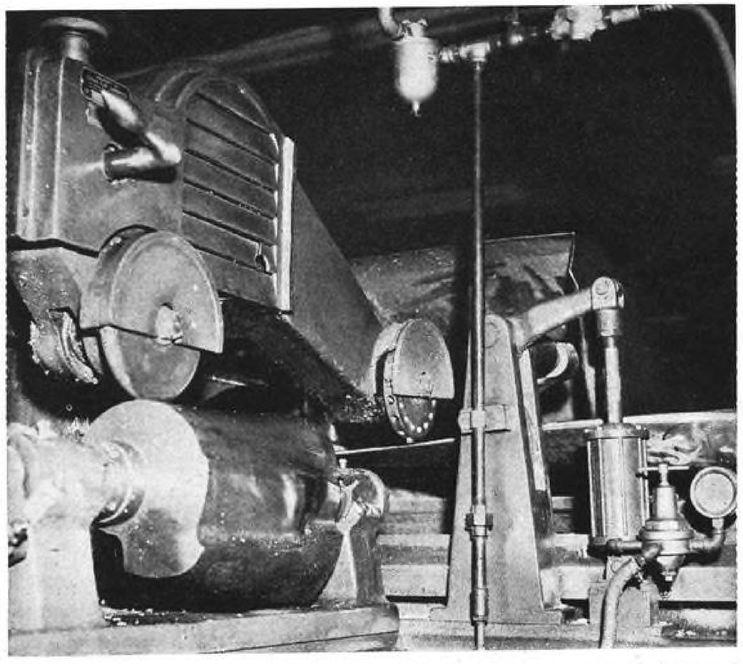

"Berliners," first invented in World War I for wooden props, are now used to finish faces of aluminum blades. Contour cam at left regulates depth of cut as blade is fed beneath revolving cutter at center.

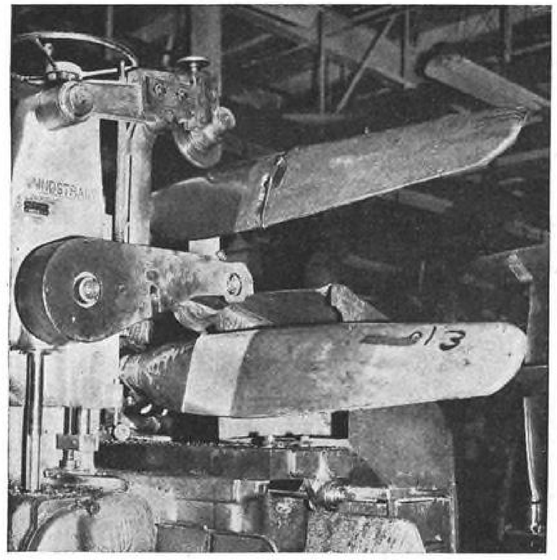

Copy mill turns both sides of blade from station 36 to shank. Master blade, guiding cutter, is at top; blade being processed is below.

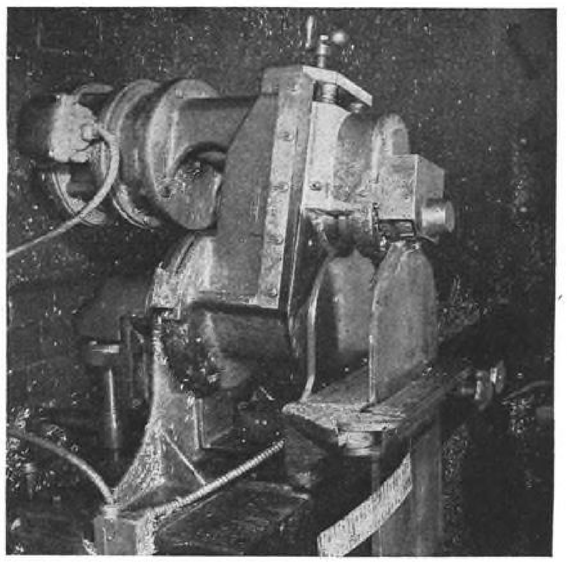

Special contour mill shapes end of blade. Cutter at top is guided by cam directly below blade end.

as to get greater accuracy in the copy milling.

Now the face of the blade is hand ground to fit accurate templates and when finished provides a perfect foundation upon which to carry the blade while the camber side is machined on another Berliner.

Special mills have been designed to finish the top and sides of the blade. A Borematic finishes the shank radius and faces the bottom of the blade. A vertical lathe is used for hand dressing the contour between blade and shank. The camber side of the blade is now hand ground and blade is balanced at same time. Inspection for flaws follows. Blades are dipped in a caustic solution, washed, then dipped in an acid solution. After washing off the acid, any fine cracks or defects in the polished blade

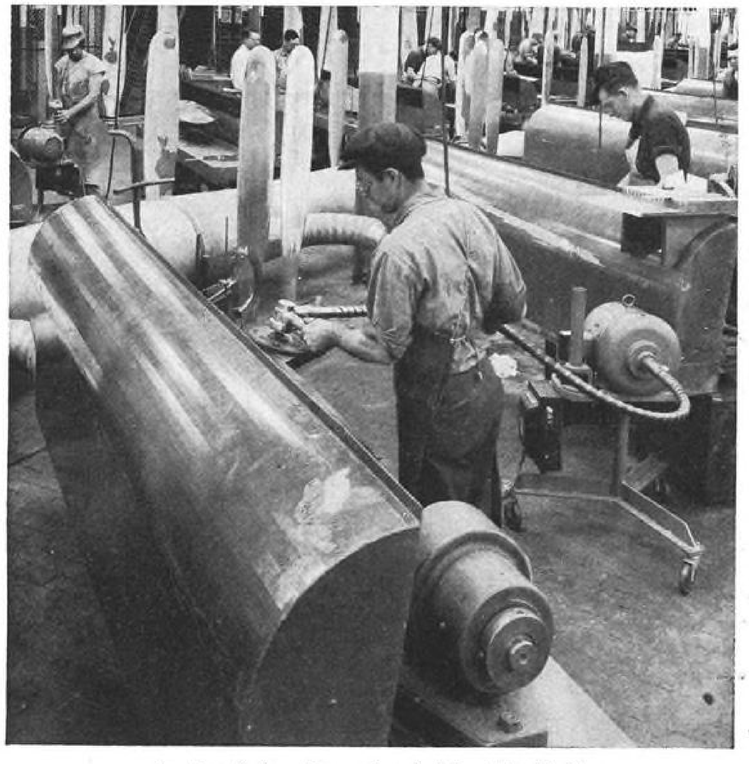

Lapping off of machine marks and giving of final finish comprises most costly operation in blade making.

This hand operation blends machined shank and copy-milled portion of blade.

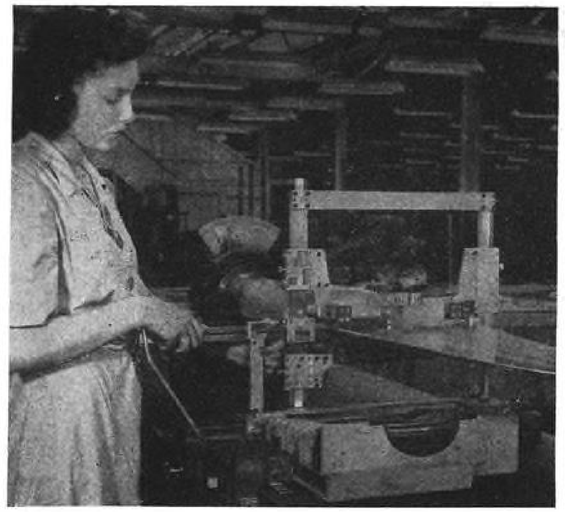

Airfoil inspection by vernier scale instruments, measuring angularity, width, and length within .001 in.

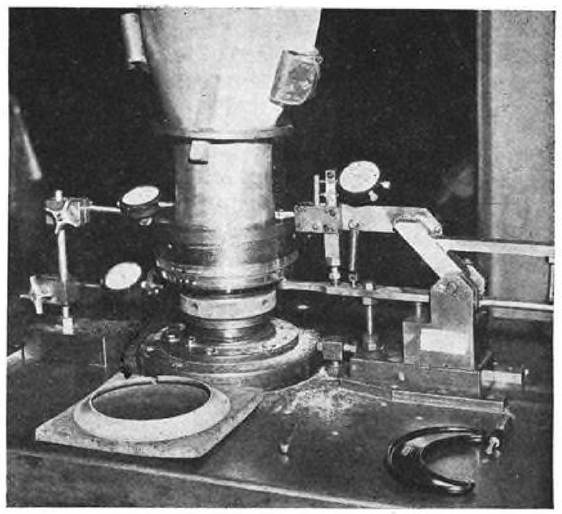

Gage for inspecting shanks of finished blades. Three dial indicators record measurements within .001 in.

will appear as black lines that can easily be detected by the inspectors.

After structure inspection, a final polish is given, and then a preliminary balance is made by inspectors. If the blade passes, it then goes to a four-spindle Ex-Cell-O and the locating holes are drilled and tapped in the bottom of the shank to secure the bronze bushing after it is inserted. The tapered hole in the shank of the blade is then bored out on the Borematic.

Next the end of the blade is carefully gaged, then the setting graduations are embossed on the edge of the shank flange.

Bushings are Frozen

The bronze bushing which goes in the end of the finished blade is frozen to —20 deg. F. in a special Frigidaire commercial unit. The bushing is then pressed into the blade shank with 900-lb. pressure. Then the blade is ready for its accurate dimensional check on the very complete inspection fixtures provided.

A final buffing is given the blade to remove any minute scratches, due to handling, and it is then balanced with lead wool and degreased in an atmosphere of dichlorethylene. This eliminates water spots and provides a clean base upon which to apply the paint.

During the entire cleaning and painting process the blades are hung from a moving conveyor so no hands need touch the blade. Great care is required in painting, for a little overspray on the yellow tip is enough to change the balance of the blade.

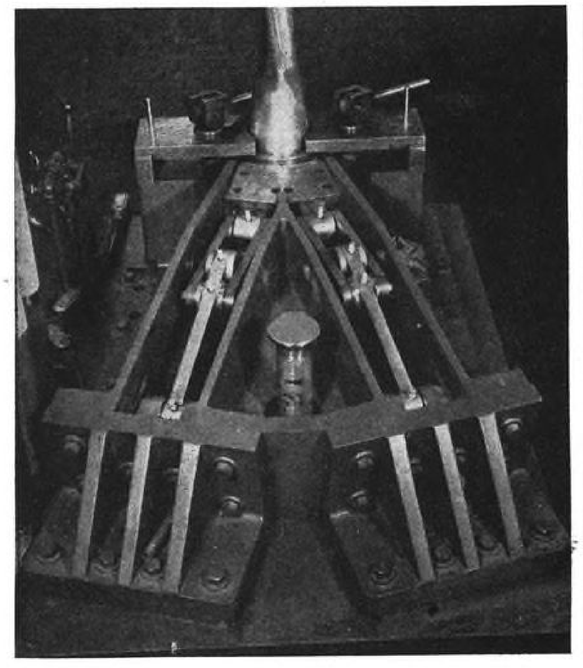

Hydraulic toggle press which obviates engraving of scale graduations on shank. This method is faster and more accurate than engraving.

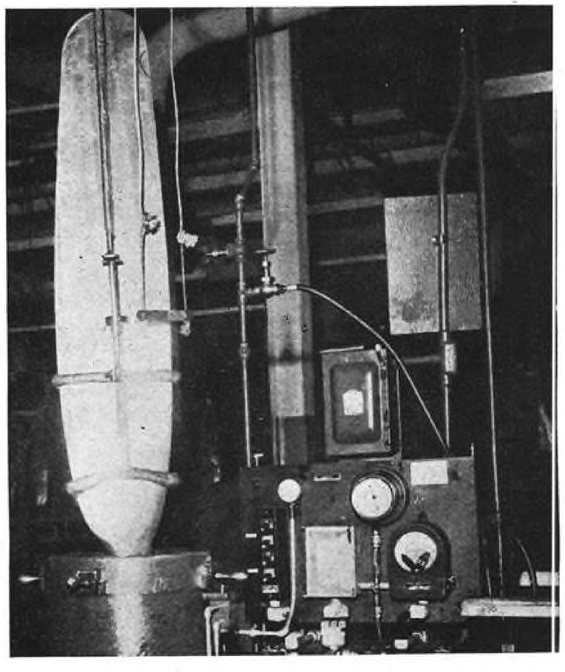

Toggle-type pneumatic hammer forces bronze bushing into shank. Bushing is frozen at —40 deg. F before pressing.

Approach to the Problem Of Radio Precipitation Static

PART II—NOISE REDUCTION

By C. J. BREITWIESER
Design Staff Engineer, Consolidated Vultee Aircraft Corp.

Concluding his two-part series on this troublesome phenomenon, the author discusses present methods of noise reduction and the probable final solution to improve radio communications.

IN APRIL AVIATION we concluded that the apparent discrepencies of the phenomenon of precipitation-static are explained by the differences of the electrical conditions of the atmosphere. Contradictions to the current hypotheses seem to take place at a time when the airplane is flying through a region of appreciable electric gradient and may be rationalized by giving proper attention to the gradient field effects.

The methods of reducing radio interference of this nature may be grouped into two classes: (1) Treatment of the airplane, and (2) treatment of the radio apparatus.

Two general methods of treatment may be applied to the airplane: (a) The surface and exterior of the plane may be so treated as to minimize the rate of accumulation; (b) the airplane may be treated with devices to minimize the effects of the charge once it has accumulated.

Minimization of Charging Rate

First and most direct method of minimizing the accumulation of electric charge is to reduce airplane speed. The greater the velocity of impinging particles of precipitation, the greater the number of electrons knocked off with a subsequent increase in the charging effect. Reducing the speed greatly reduces the effect of precipitation-static. Not all pilots seem to be familiar with this fact, but, regardless of the other measures which are applied, the speed should be reduced. Reduction of propeller speed also decreases the amount of interference. The radio noise may be lessened by reducing the engine rpm.; the pitch of the propeller may be increased to compensate for the reduced rpm.

A second method of reducing the accumulated charge is to treat the surface of the aircraft. A smooth surface with a minimum of projections and irregularities has a lower charging rate than a rough surface. Certain type finishes have been observed in wind-tunnel tests to have a marked effect on the charging rate. In a Consolidated Vultee test, one type of airplane dope on the metallic surface of the model resulted in a charging rate of four times that of another type of paint. It was also observed that for certain types of dust, one paint would cause a charge of negative polarity to build up, whereas another paint would cause a positive charge.

Observations of this nature indicate that there is considerable value in the treatment of the surfaces. Investigations have not proceeded far enough as yet to make any specific recommendations at this time; however, it is not outside the realm of possibility that the precipitation-static interference may be substantially reduced by the application of a thin layer of paint of some specific composition.

Control of Discharge

Once the charge has accumulated on the airplane, it will build up to a potential at which some region of high electrical gradient experiences local ionization and the charge drains off. As explained before, this will cause radio interference unless some method is provided for controlling it.

Most direct approach is to smooth all projections and sharp edges on the air-

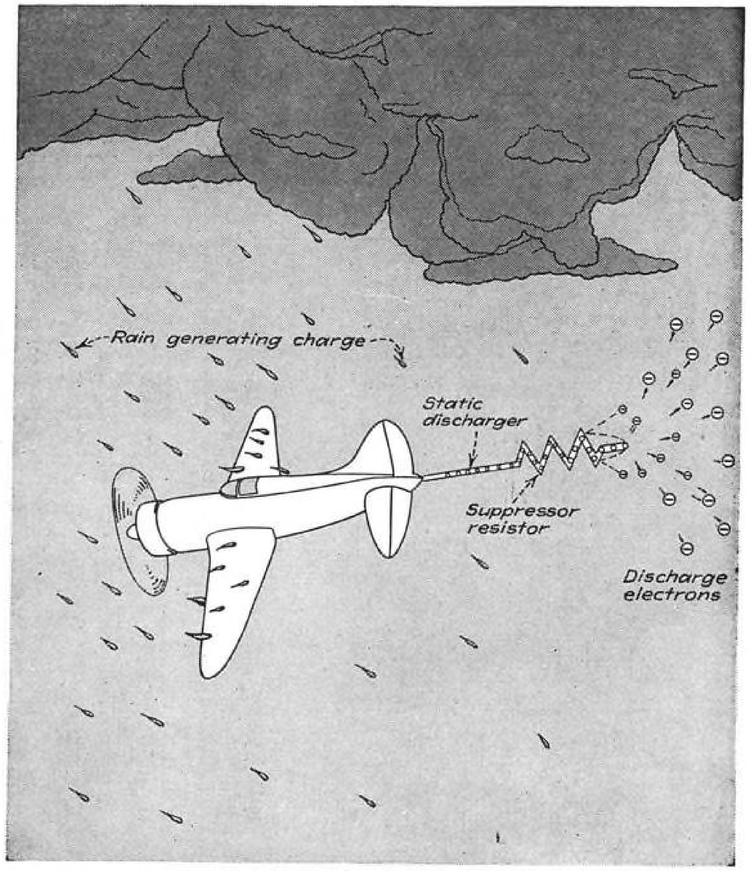

Fig. 3. Precipitation static discharger.

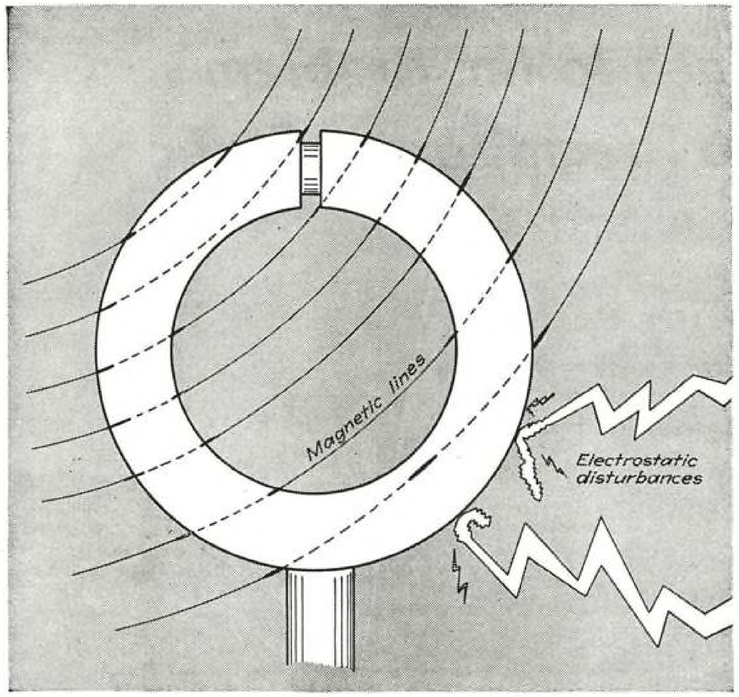

Fig. 4. Shielded loop antenna, most generally used on aircraft for noise reduction.

plane and provide one or two sharp points so that, as the charge builds up, these points will create a critical electrical gradient before any other place on the airplane, and the ionization and discharge will be localized.

Once the discharge is localized, some measure of control may be applied. The simplest method is to use a long, thin trailing wire with a series resistor (Fig. 3. Also see Part I, April). The trailing wire extends the sharp point (at which the discharge takes place) some distance to the rear of the plane. The series resistor acts in the manner of a spark plug suppressor on an engine and reduces the severity and duration of the noise pulses.

The series resistor may act as either a true oscillation suppression resistor or as a decoupling resistor, depending on the manner in which it is applied. As a decoupler (usually of short length), it serves to isolate the discharge circuit (trailing wire, in this case) from the inductance and capacity effects of the airplane. As a suppresser (usually of considerable distributed length), it serves to increase the circuit decrement and add resistance to the spark-excited circuit so that it will no longer be self-resonating.

Many other devices have been used to control the discharge. Various forms of trailing wires and static discharge spikes and rods make their appearance from time to time. A successful discharger does either one of two things, or both. It localizes the discharge and suppresses the radio interference or it converts the discharge into a type of discharge which has a minimum effect on the radio receivers.

Such devices as the radium-tipped discharge rod, ultra-violet generator, high polarizing potentials on the discharger, and creation of secondary particles for charge transportation have all been considered. Several modifications of these are, at present, being developed and show signs of being considerably more effective than the trailing wire. The *modus operandi* of each is to drain the accumulated charge from the airplane in such manner as to cause a minimum of radio-frequency electro-magnetic disturbance.

Another approach to the problem is in the design and treatment of the radio apparatus. There are certain systems of

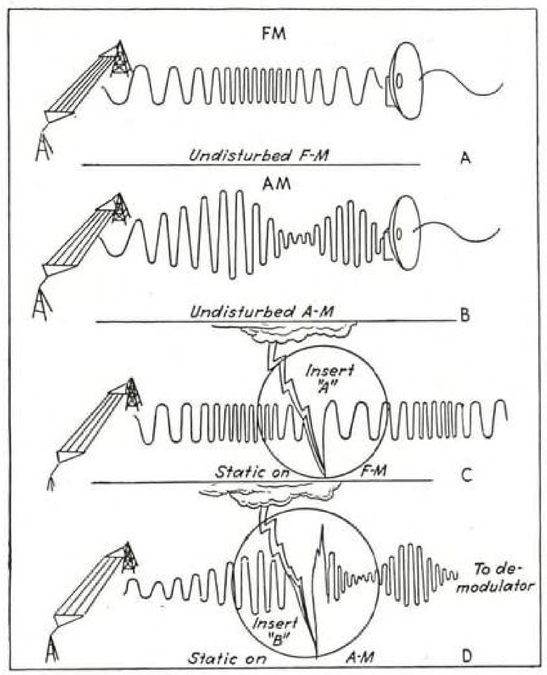

Fig. 5. Comparison of sensitivity of frequency-modulation and conventional amplitude-modulated systems under undisturbed and disturbed conditions.

Fig. 6. Diagram showing how receiver picks up "disturbed" transmissions over F-M and A-M systems. Static affects amplitude but not fundamental frequency.

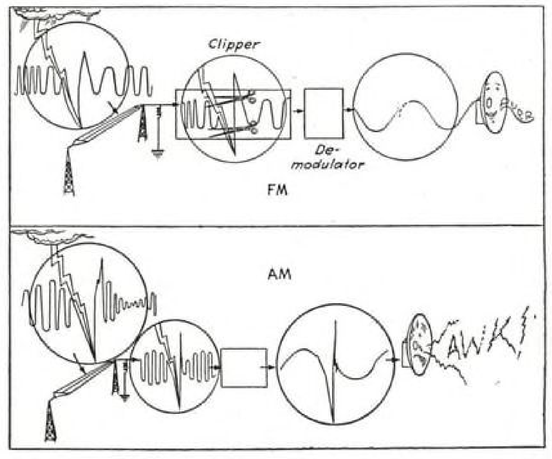

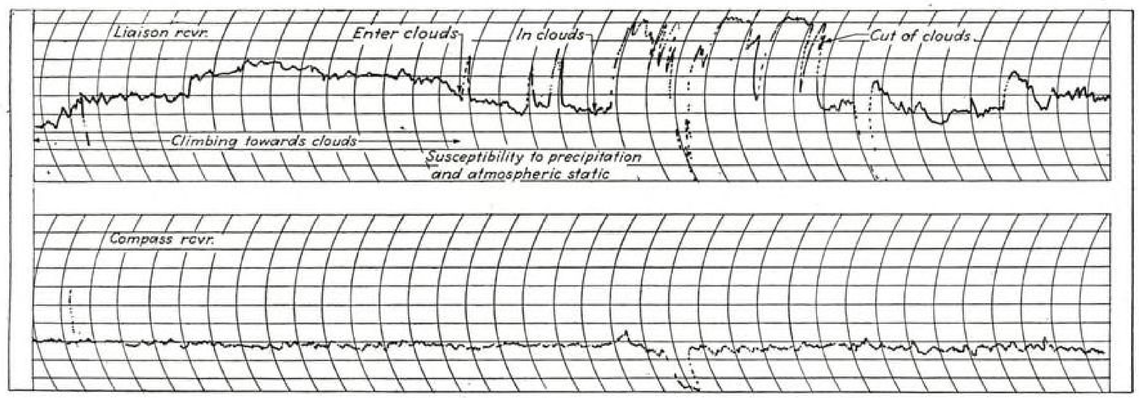

Fig. 7. Simultaneous recording of noise level output on a receiver using a conventional single-wire antenna and a receiver with shielded loop (compass type).

radio transmission and reception which are inherently less sensitive to outside disturbances than others and may be used in aircraft to minimize the effect of static.

Frequency-Modulation

Frequency-modulation systems are many times less sensitive than the conventional amplitude-modulated systems. Unfortunately, most aircraft systems of today are amplitude-modulated, a system which is about the worst offender of all.

Not all F-M systems are equally insensitive; the so-called "wide-band" gives the greatest reduction in noise.[5] Expressed crudely, atmospherics or outside electrical disturbances are capable of inflicting *amplitude* or *magnitude* changes in a transmitted radio wave, but they are unable to change the *wave length* of the transmitted wave, since that is solely a function of the transmitter components. An A-M receiver is sensitive to changes in signal level or intensity and therefore sensitive to static disturbances. On the other hand, the F-M receiver will respond only to deviations in frequency and therefore does not respond to static.

An F-M radio wave transmits the "intelligence" by means of the variations in the carrier frequency. Note in Fig. 5A the essentially constant amplitude of the F-M wave and the variation in the frequency. In Fig. 5B it may be noted that the fundamental frequency is essentially constant, but the amplitude of the signal is varied in direct ratio with the transmitted "intelligence."

In Figs. 5C and 5D, static mainly affects the amplitude but not the fundamental frequency. These "disturbed" transmissions are picked up by the receiver as shown in Fig. 6.

The F-M receiver has a so-called "clipper" stage which removes the effects of any variation in amplitude and, consequently, the received "intelligence" is demodulated and reproduced at the loudspeaker with practically no distortion from the static.

The A-M (amplitude-receiver), on the other hand, depends upon the variations in amplitude of the received wave for the reproduction of the transmitted intelligence. Therefore, any amplitude distortion of the transmitted wave will be impressed on the demodulator stage and will manifest itself as distortion or noise in the loud-speaker.

One of the limiting factors of present-day F-M systems is the fact that it is a wide-band system and, therefore, necessarily is confined to the short wave lengths where these wide channels are available. Nevertheless, F-M is creeping into more and more aircraft radio applications and is a great improvement over the present A-M as far as precipitation-static is concerned.

Noise Reduction Antenna

Radio interference of external origin may be substantially reduced by a correctly designed antenna. A long antenna will pick up more noise as well as more signal. The signal-to-noise ratio may be increased by using an antenna of critical length, or one which is tuned to the particular wave length in question.

There are several forms of so-called noise reduction antennas. These types of antenna are generally for the reception of one particular wave length or band of wave lengths, and only to the extent to which the radio equipment in question is to be used in this manner is this type of antenna of any value. A trailing wire which may be reeled in and out to any specific length is frequently used in aircraft radio.

In the case of precipitation-static, the advantage of a tuned antenna is offset by the fact that the trailing wire acts in a manner similar to that of the static discharge wire and thus pipes noise directly into the receiver. Tuned doublet and other similar types of noise reduction antennas are, in general, impractical for the installation on an airplane.

Loop Antenna

By far the most universally used antenna for noise reduction on aircraft is the shielded loop or "anti-rain static loop," as it is called by some manufacturers (Fig. 4).

This antenna consists of a loop antenna which is completely enclosed in a metal sheath or housing, save for one small segment or slot to prevent the shield from forming a closed loop. The shield is made of a nonmagnetic material.

Since the shield is not completely closed, the loop is responsive to the magnetic field. All but the section at the narrow slot is completely enclosed and electrostatically shielded. A quite complete description of the shielding action is given in Dr. Starr's paper (see references, Part I, Apr. AVIATION).

Largest component of precipitation-static noise is in the electric field vector and therefore is markedly reduced by an "anti-rain static" loop. Due to the fact that the electric current flowing from a static discharger is low and the voltage is high, a relatively large amount of the discharger noise field is propagated as an electric field, and a relatively low portion is magnetic. The magnetic field is not propagated to any appreciable extent and the electric component is shielded by the electrostatic shield of the loop. Therefore, the loop antenna used in conjunction with the discharger has been found quite effective in reducing the effects of precipitation-static.

The conventional single-wire antenna is quite susceptible to the precipitation type of disturbance. Fig. 7 is a simultaneous recording of the noise level output on a receiver using a conventional single-wire antenna and a receiver with a shielded loop (compass type). It is interesting to note how the noise level on the conventional receiver built up as the clouds were approached and dropped off suddenly as the airplane left the clouds. The receiver with the shielded loop gave only a slight increase in noise at the most severe region, as may be noted from the recording which remained at essentially a constant low level.

Fig. 7 is on a db scale; the top of the chart represents a saturated condition. The second scale division from the bottom of the chart represents approximately a threshold level of sound under the condition of the airplane's ambient noise.

(*Turn to page* 267)

[5] Hund, August—Frequency-Modulation (book), McGraw-Hill.

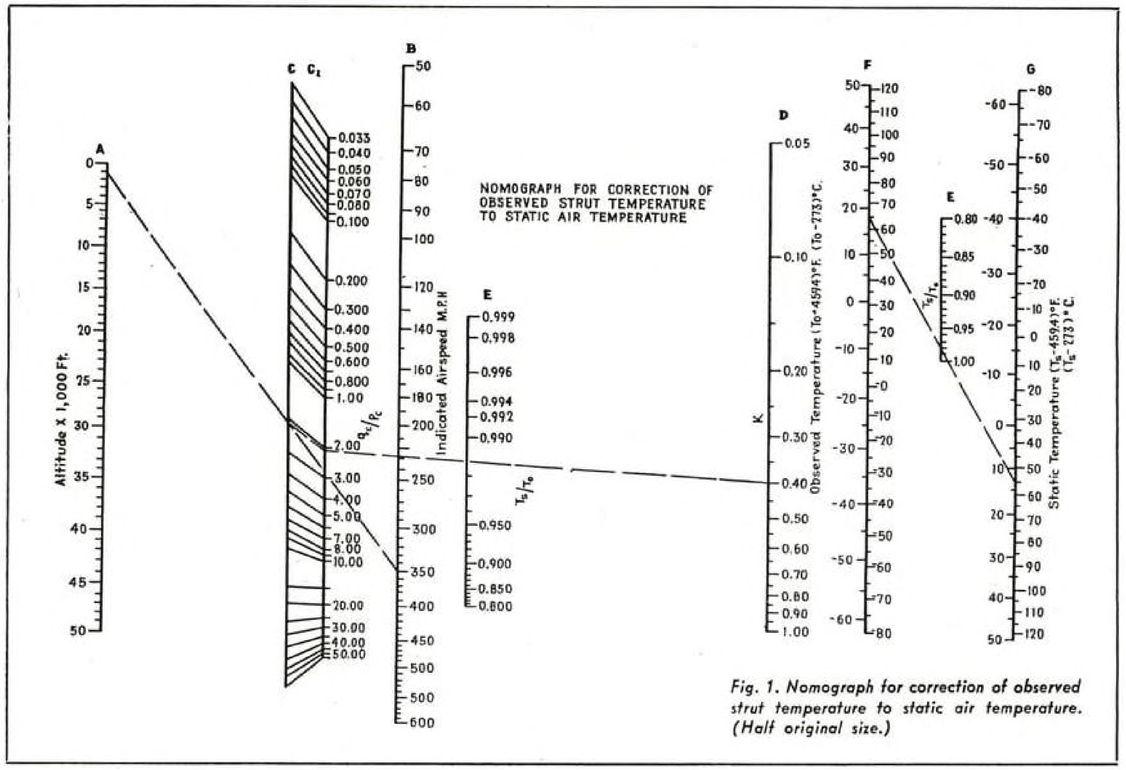

Fig. 1. Nomograph for correction of observed strut temperature to static air temperature. (Half original size.)

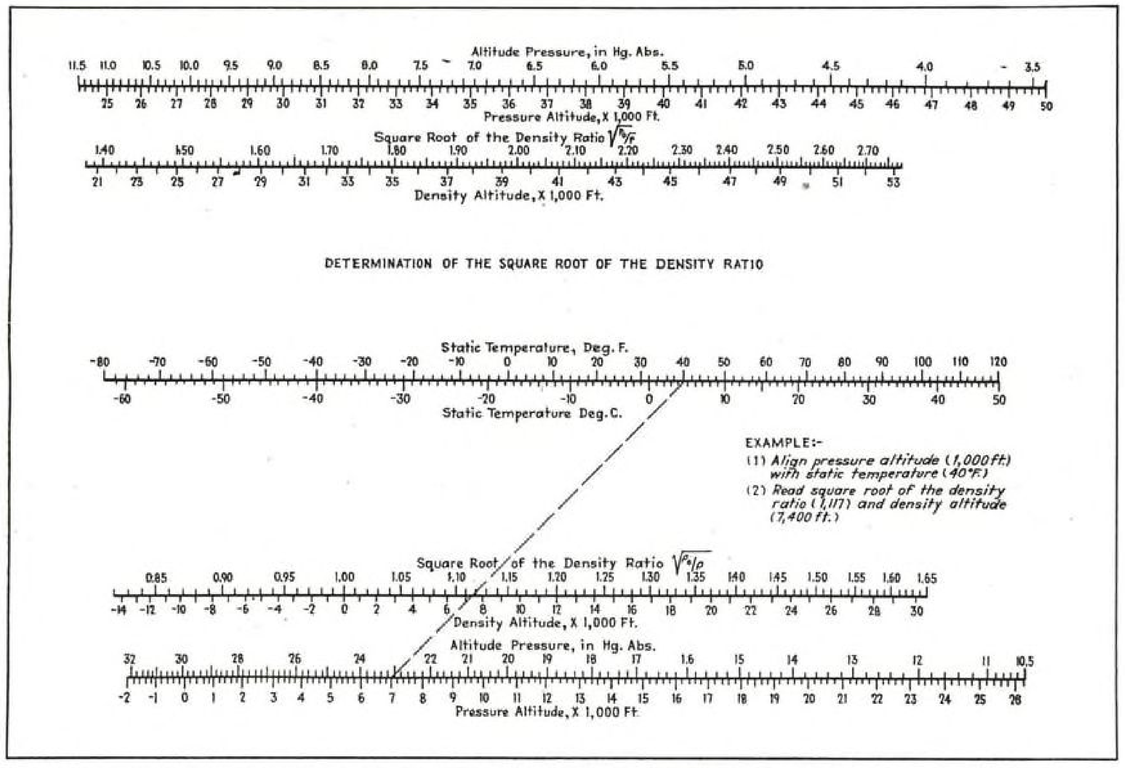

Fig. 2. Determination of square root of density ratio. (Reduced to 0.4 original size.)

Graphic Simplifications In Computing True Airspeed

By RICHARD G. SMITH, *Experimental Flight Engineer,*
Pratt & Whitney Div. United Aircraft Corp.

Presenting pertinent nomographs which not only save much valuable time in estimating true airspeed but also go far in reducing chances of error in calculations.

TRUE AIRSPEED, the velocity of aircraft relative to the air, may be computed as the product of *indicated airspeed*, a *compressibility correction factor*, and the *square root of the density ratio*.

First, for the sake of clarity, it would be well to discuss the significance of each of these terms:

By *indicated airspeed* is meant the reading of a perfectly constructed airspeed meter subjected to the true dynamic pressure of the air. Practically, it is the airspeed meter reading corrected for errors due to the instrument itself and to an imperfect location of the pitot-static head.

Airspeed meters are so graduated as to read true airspeed if subjected to true dynamic pressure under standard-air sea-level conditions of air pressure and temperature. Any departure from these conditions affects the reading of the airspeed meter in two ways—

First, due to the increased compressibility of the air at higher altitudes, the dynamic pressure for a given true airspeed would increase if the air density were to remain unchanged. The airspeed meter reading, or indicated airspeed, would then become higher than the true airspeed. Thus the need for a "compressibility correction factor."

Second, as the altitude is increased the air density must actually decrease. This has the effect of reducing the dynamic pressure for a given true airspeed. The indicated airspeed, after being corrected for compressibility changes, is multiplied by the square root of the density ratio to obtain true airspeed. This density ratio is equal to standard air sea-level density divided by the density of the air at the altitude in question. Inasmuch as air density is fixed by air pressure and temperature, it follows that the square root of the density ratio is a function of pressure altitude and free air temperature.

Unfortunately, any temperature-measuring device as installed on an aircraft does not measure static free-air temperature. This is because as the thermometer strikes the air, the air is compressed and its temperature is raised. It is necessary to correct for this temperature rise before the square root of the density ratio can be accurately determined. This correction can most conveniently be made by use of the accompanying nomograph (Fig. 1). Pressure altitude and indicated airspeed are aligned on scales A and B. The value obtained on scale C is transferred to scale C_1, then aligned with the proper value of K (next page) on scale D. The temperature ratio found on scale E is transferred to scale E_1 and aligned with the observed temperature on scale F. Corrected temperature is then found on scale G.

Employing this corrected temperature and the pressure altitude, the square root of the density ratio may be found on the corresponding (Fig. 2) nomograph. The compressibility correction factor is read from Fig. 3, and the true airspeed is then a simple slide-rule computation: Indicated airspeed × compressibility correction factor × square root of the density ratio.

Value of K

The value of K depends upon the location and type of temperature-measuring device used. It is a value which may be accurately determined from speed-course calibration data by plotting the observed strut temperature versus true airspeed for the calibration runs. Runs should all be made at the same altitude and in as short a time as possible, preferably in one flight, so as to minimize changes in the static air temperature. The curve obtained may be extrapolated to zero airspeed to determine the static air temperature. For each run, the temperature correction (= observed temperature — static temperature) may then be plotted against true airspeed. Comparison of this curve with Fig. 4 will yield the value of K (= actual temperature rise + adiabatic temperature rise). K ordinarily ranges from 0.5 to 0.8, and an average value of 0.65 may be used

(*Turn to page 273*)

Fig. 3. Curve showing correction of indicated airspeed for compressibility.

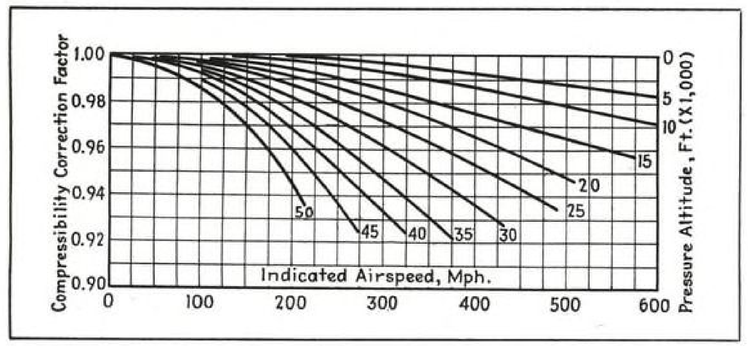

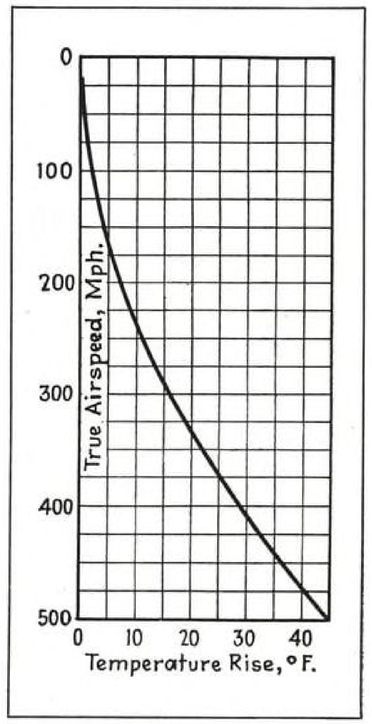

Fig. 4. Curve showing adiabatic air temperature rise due to impact.

Precision Angle Plates "Bypass" Trigonometry

Obviating use of math for laying out compound angles, dial angle plates employed by Curtiss-Wright save many hours and give instant accuracy.

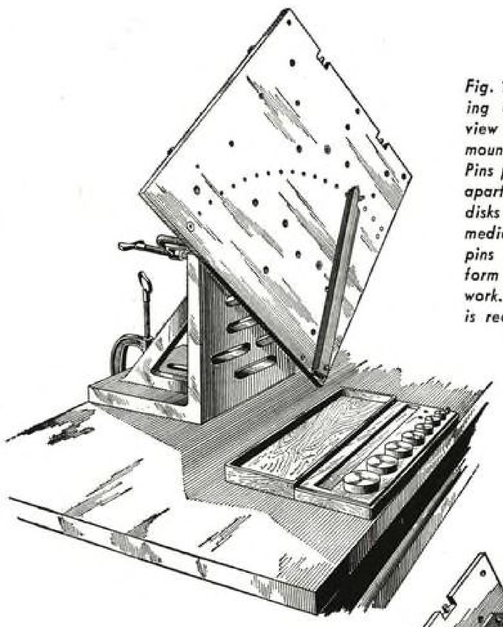

Fig. 1. Dial angle plate for measuring compound angles. This front view shows plate with sine bar mounted on pin at lower corner. Pins placed in holes spaced 5 deg. apart give angular spacing, and disks (in case) are used for intermediate measurements. Permanent pins in notches on edge of plate form sine bar for simple layout work. No knowledge of mathematics is required to use this instrument.

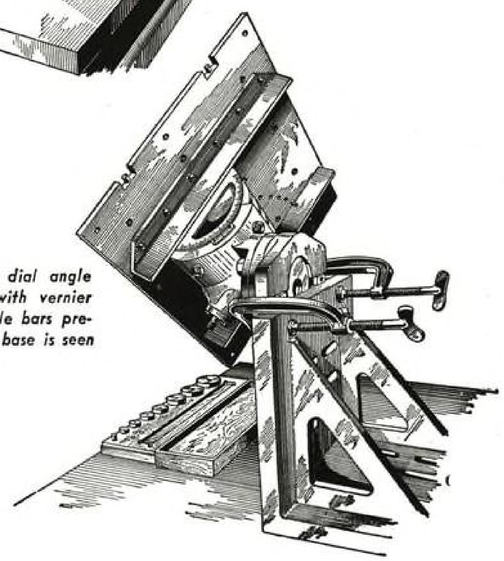

Fig. 2. Rear view of dial angle plate, showing knee with vernier scale. Reinforcing angle bars prevent warping. Rotary base is seen between clamps.

THE PROCESS of laying out and checking jobs where compound angles are involved, has been made simpler and shorter by the dial angle plate, an instrument (Figs. 1 and 2) designed by Harry B. Comfort and Charles F. Palm, foremen in Curtiss-Wright's tool inspection department. The plate—actually a dial for a 90 deg. arc—is used in conjunction with a toolmaker's knee with a vernier scale. This knee, maneuverable from a vertical to a horizontal position, has a rotary base and furnishes but one angle. By applying the angle plate to the knee, compound angles can be obtained in a range sufficient for all practical applications.

Measurement by means of the new instrument results in better workmanship, while a number of attachments make it easy to apply in complicated jobs. It can be used by inexperienced workers for precision angle checking, either simple or compound, since the angles can be measured in degrees, minutes, and seconds.

The plate may be made in any convenient size desired, and to date both a 10x12 in. and a 20x14 in. plate have been designed. Construction of the instrument and its accessories is simple. A series of plotting holes are drilled in a $\frac{1}{2}$ or $\frac{3}{8}$ cold rolled steel plate. Slip fit dowel pins, a set of graduated disks, centrally drilled, and a pivot sine bar comprise the accessories.

Two feathers on the back surface, parallel to the fore edge, and four lock bars lock the plate in any position on the knee. Holes provide for angle measurement in a 90-deg. arc by insertion of slip-fit pins in combination with a sine bar. Three holes on a straight line along the base and two holes along the right edge form a 90-deg. angle. The hole at the angle gives a center of an arc formed by 19 holes drilled in the plate on a 15 in. radius and spaced 5 deg. apart. Additional holes are provided for other angle combinations. All holes are reamed .25 in.

A sine bar pivots on the corner hole to contact a fit-pin inserted at any desired point on the arc, thus determining that particular angle. Minutes of angle are obtained by slipping disks over the pins graduated in sizes from $\frac{1}{4}$ to $4\frac{3}{4}$ deg. A further breakdown in seconds can be made by using gage pins with the disks—the pin heads also in graduated sizes.

A feature of the sine bar is an obtuse angle notch on the index end with a slight circular relief provided at the angle. This cut-out provides a contact surface for the pins or the disks on the sine bar.

A simplified sine bar, which can be applied in checking compound angles not easily measured with standard sine bars, is another instrument for angle measurement developed in the plant's tool inspection department (see Fig. 3). Designed by Tool Inspector William F. Schulte, it has proved itself highly useful in tool and fixture manufacturing and inspection.

The instrument is a cylindrical rod with concentric ball bearings at the ends. In using it where an angle is not readily obtainable, there is no need for extra measurements and additional calculations,

Lightweight Rubber Fuel Cell

INCREASES SAFETY
REDUCES MAINTENANCE

WHEN self-sealing rubber fuel cells were developed, their prime purpose was to protect against fuel leakage and fire caused by bullets. However, it was soon discovered that these rubber cells had another important advantage over the integral-type compartments formerly used—they gave considerable protection against other types of leakage. For example, in minor crashes, these rubber cells would resist shocks which could buckle and split open an integral fuel compartment.

This discovery suggested the use of rubber fuel cells as a solution to the fuel-leakage problems in non-combatant aircraft. It wasn't necessary to carry the extra thickness and special construction of the bullet-sealing cell to give airplane designers the other advantages of rubber containers. The lightweight B. F. Goodrich "bladder-type"cell meets the need for a flexible, leak-proof, non-self-sealing rubber unit. These B. F. Goodrich cells are actually rubber bags or bladders tailored to fit accurately into the spaces between wing supports. Each cell is equipped with fittings for filling and draining.

Integral-type compartments, on the other hand, are simply calked-off sections of the wings with connecting channels through which the fuel flows. Thus, the skin of the wing is actually the outside of the fuel tank, with every rivet and seam a potential source of leakage. Even in rigid wings there is constant strain on these metal junctions. This strain, plus changing temperature, in time may cause rivets and seams to loosen. Although this loosening does not weaken wings structurally, it can result in considerable fuel leakage.

When this occurs, much needed fuel is lost in flight. As a result planes are grounded and flight schedules disrupted. And repair costs are high because the source of the leak is often hard to find and hard to repair.

B. F. Goodrich "bladder-type" cells meet these problems and offer other advantages. They can be made in many sizes and shapes. Being flexible, they're easily installed and removed. No calking is necessary, thus saving an expensive building operation.

Since each airplane requires a custom-built product, engineers should write for complete information on each new installation. The B. F. Goodrich Company, Aeronautical Division, Akron, Ohio.

MAKERS OF B. F. GOODRICH TIRES AND OVER 80 RUBBER AND SYNTHETIC RUBBER PRODUCTS FOR AIRPLANES

ARMY E NAVY

THESE SKETCHES SHOW YOU WHY

BLADDER-TYPE FUEL CELLS ARE BETTER

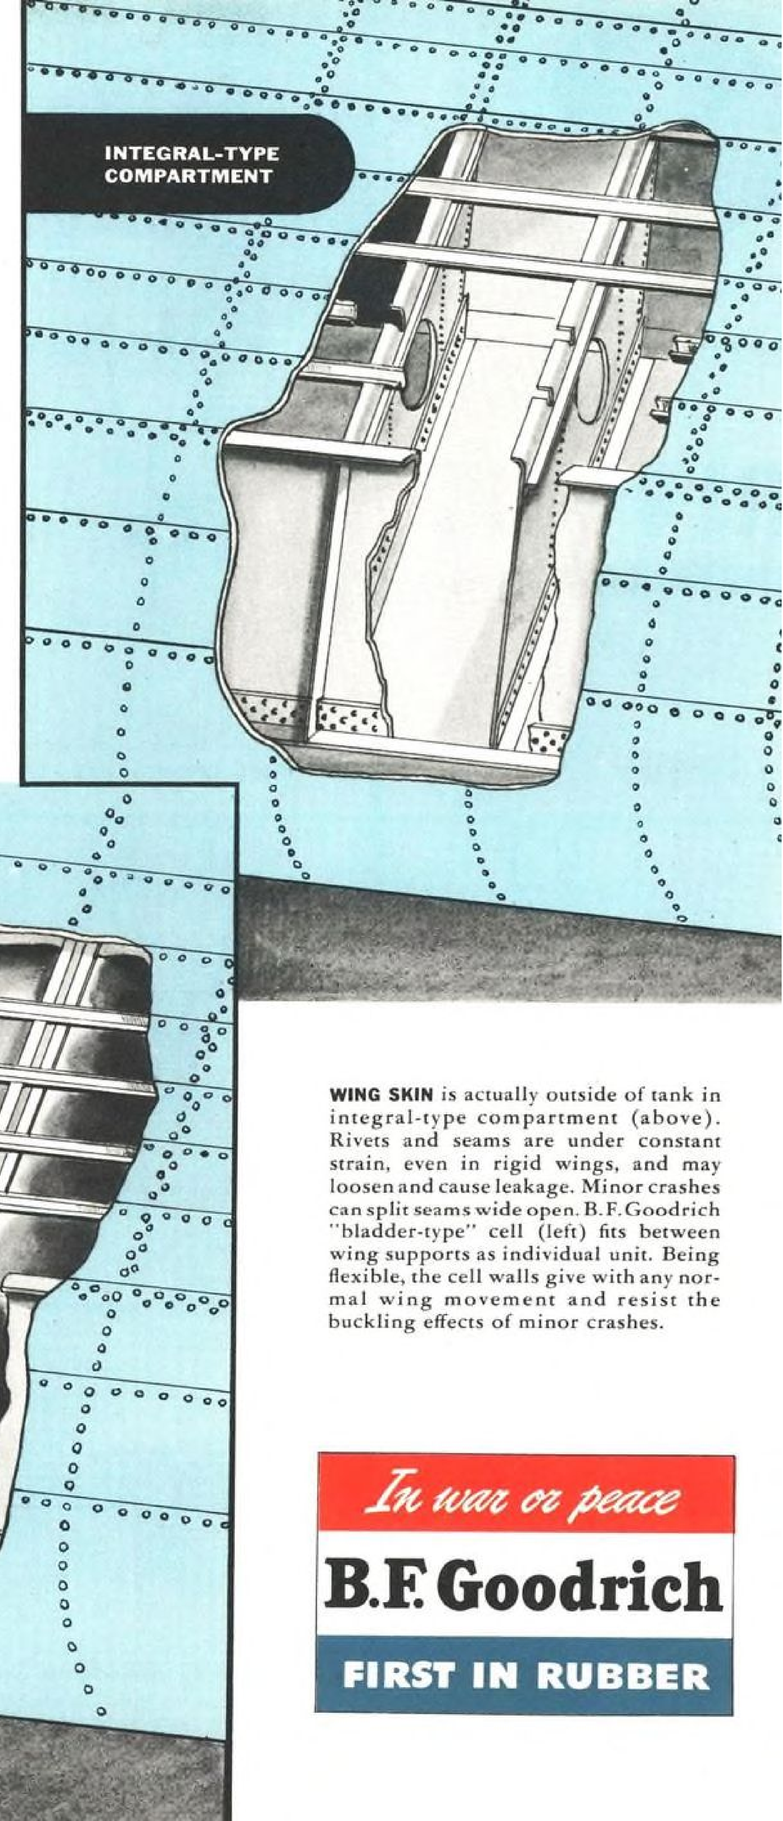

WING SKIN is actually outside of tank in integral-type compartment (above). Rivets and seams are under constant strain, even in rigid wings, and may loosen and cause leakage. Minor crashes can split seams wide open. B.F.Goodrich "bladder-type" cell (left) fits between wing supports as individual unit. Being flexible, the cell walls give with any normal wing movement and resist the buckling effects of minor crashes.

In war or peace

B.F.Goodrich

FIRST IN RUBBER

10 Good Reasons why you should Blind-Fasten with RIVNUTS

RIVNUT INSTALLATION IS SIMPLE FAST FOOLPROOF!

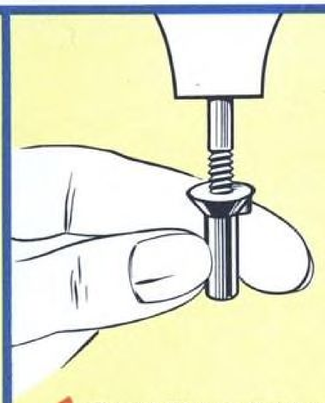

1 Thread Rivnut all the way on to pull-up stud of heading tool.

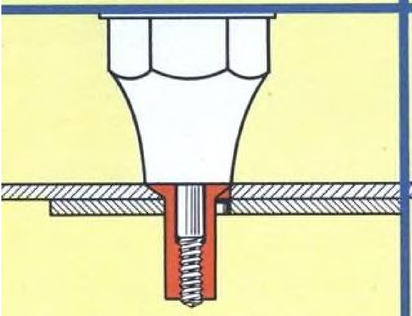

2 Push Rivnut and pull-up stud into hole with Rivnut head firmly against, and at right angles to, the work.

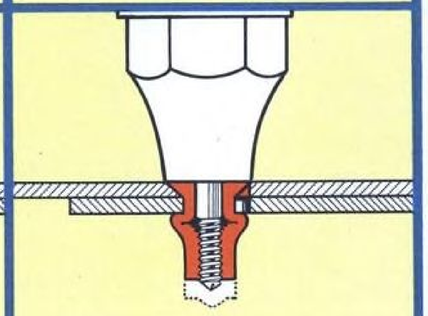

3 A squeeze on the tool lever retracts the pull-up stud slightly, causing a lateral bulge upset of the Rivnut.

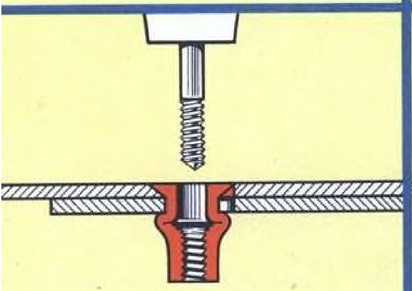

4 Next, unscrew pull-up stud, leaving threaded core of Rivnut available for use as nut plate.



5 Attaching accessory is easy now—just screw it on. Rivnut threads grip screws firmly after upset.

Here's a combination of advantages no other blind fastener can match

- Dual use—can serve as blind rivet or nut plate or both
- Simple, one-piece construction
- Unusually wide bearing surface
- Requires very small hole
- Forms a compression fit
- Speed of installation
- Economical
- Can be used as received
- Wide range of types and sizes
- Available with key to increase torsion resistance

Data Book . . . FREE!

Get the whole story. Book contains facts you'll want on types, sizes, grip ranges, strength and weight figures; also facts on heading tools available. For your copy send request (on company letterhead, please) to The B. F. Goodrich Company, Aeronautical Division, Akron, Ohio.

B.F.Goodrich

RIVNUT

IT'S A RIVET...IT'S A NUT PLATE

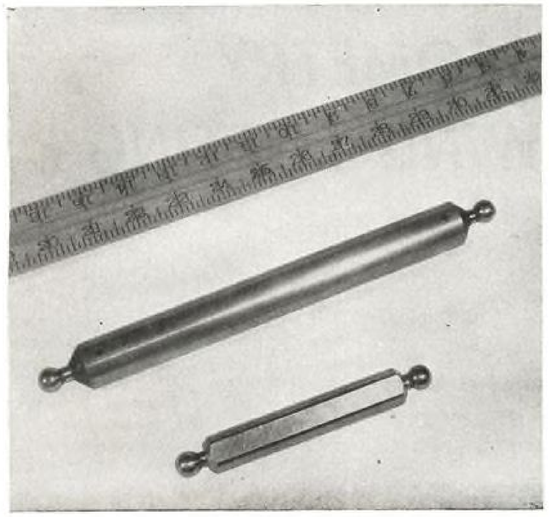

Fig. 3. Universal sine bar with ball ends to eliminate angle allowance. Flat on bar permits easy and accurate attachment. (Curtiss-Wright photo.)

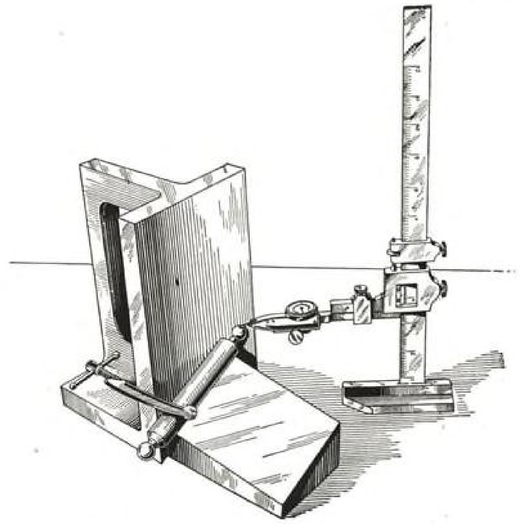

Fig. 4. This sketch depicts use of universal sine bar when measuring compound angle in conjunction with height gage and .001-in. indicator.

which would be the case with standard sine bars where thickness is taken into consideration. Since all points on the ball are equally distant from the center, the highest point is constant.

Two sizes are used with over-all lengths of 5.500 in. and 10.500 in., respectively. The larger size is applicable where large parts are involved but the smaller bar meets ordinary shop requirements. The balls are of .500 in. dia. The body diameters are $\frac{1}{8}$ in. and 1 in., respectively.

The balls are butt-welded to a shank, ground to fit center bore of rod. Each bar has two counterbored drill holes tapped for set screws holding the shank securely in position. Exact concentricity is maintained on assembly.

A lengthwise surface of the rods is flat-ground to prevent rolling and to enable clamping against a surface plate. The ends of the bar are chamfered approximately 45 deg. Bar is always used in conjunction with some true surface from which measurements can be taken (as shown in Fig. 4).

Use of jigs and compound angle plates is minimized in tooling for manufacturing aircraft parts by a device (Fig. 5) designed by Ray C. Albrecht, a foreman in the tool department, and further developed by Alvin W. Mueller of tool design and production planning group, who added a compound angle plate which can be used for milling, shaping, planing, or grinding.

Value of the instrument in time saving, tool saving, and setting of compound angles is considerable. On one experimental job on which the device was applied —a main spar fitting on a center panel —at least three jigs and two compound angles were eliminated.

Construction is simple. A cylindrical sine bar, $\frac{3}{4}$ by 6 in., pivots on a hinge pin in the upper left-hand corner of a bracket block, 2x6x$\frac{3}{8}$ in. A slot 45 deg. in length and on a $1\frac{1}{2}$-in. radius from the pivot, serves as a guide for a rocker arm bolt placed through the sine bar. This bolt has a flat elliptical head which fits snugly in the slot. A wing nut on the end of the bolt locks the bar in position. Bar has a lengthwise flat surface which bears against the block, and an upright pin on the end of the bar provides a pull knob. Holes are drilled in each upper corner of the block for attachment to the edge of the angle plate.

Incorporating the compound angle determinant just described, Alvin W. Mueller designed a compound angle plate that eliminates calculating in machining and

(*Turn to page 263*)

Fig. 5. Compound angle determinant composed of sine bar attached to base for determining foreshortened angles without use of mathematical calculations. Instrument may be attached to any combination of angle plates or other instruments. (Curtiss-Wright photo.)

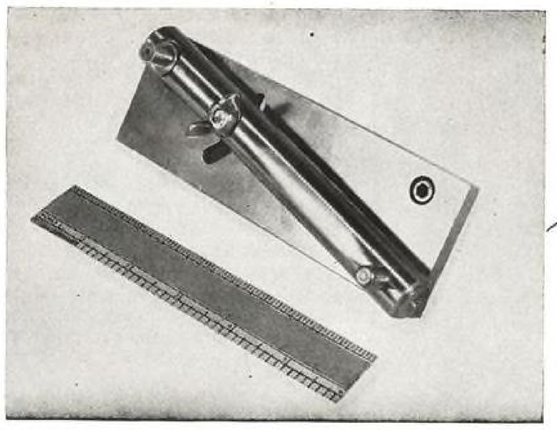

Fig. 6. This compound angle plate assembly, known as the Magnasine, incorporates compound angle determinant shown in Fig. 5. Sine bar is set to desired angle, then brought parallel to base. Adaptable planed wedges are used to obtain final close adjustment.

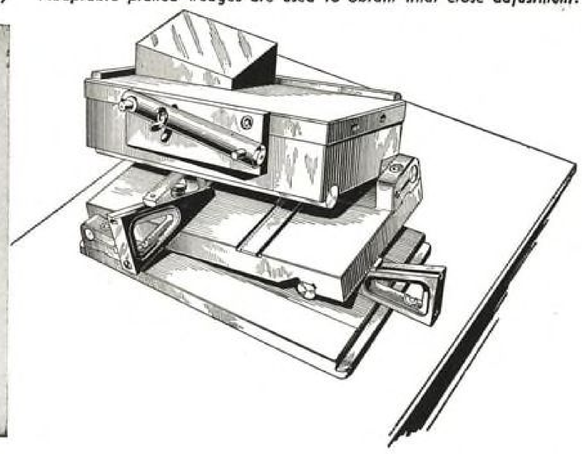

ANALYTIC GEOMETRY FOR SPEEDIER WING LOFTING

PART III

By **R. W. FEENY**, *Loft Engineer, Northrop Aircraft, Inc.*

Methods for obtaining many vital dimensions of canted structural wing members are described in this third part of our series on simplified wing development by use of analytic geometry.

IN OUR PREVIOUS ARTICLES we sidestepped the actual procedure involved in obtaining equations of canted structural members in the wing. These structures, which are canted in both plan view and front view, are often called skewed. Because of the numerous problems which occur in the airplane involving this type of assembly, we should know the methods used which can most easily give us the desired answers.

If the equations of these canted structures can be found, then by the use of them in conjunction with our other equations of structural parts, many vital dimensions may be obtained.

Before we can delve further into the use of analytic geometry, we must first understand some of the principles and theories used for determining the equations of canted planes.

The equation of a canted plane can be defined as an equation, in terms of X, Y, and Z, which is satisfied by the coordinates of every point upon that plane and by the coordinates of no other point. The only information required is the direction of slope of the plane and its location.

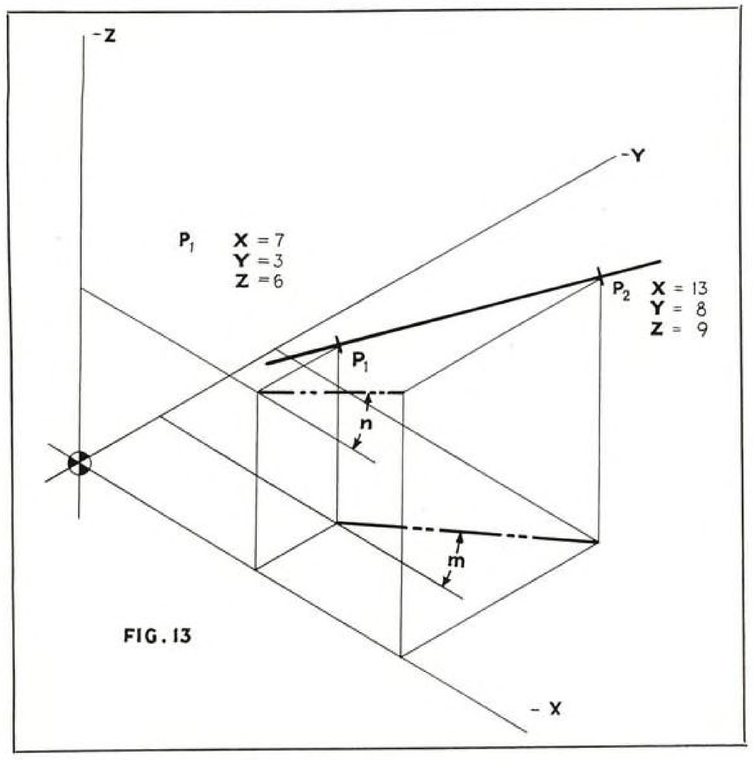

FIG. 13

If a group of planes are set up normal to a given line in space, the planes will be parallel. Therefore, so far as the direction of the slope is concerned, it is only necessary to know the direction of the normal to the desired plane. For location, it is only necessary to know the coordinates of any one point which lies within the desired plane.

Direction of Normal By Use of Direction Ratios

In dealing with lines in space, it is necessary to fix the direction taken by the line in the simplest manner possible. We do this by establishing what is called the direction ratios of the line. These are sometimes called direction numbers or direction components.

Direction ratios can be described as the ratio of the line's change in direction with respect to its "X", "Y", and "Z" axes, These can be found by the change in coordinates between any two points on the line.

Dir. ratios $= (X_2 - X_1) : (Y_2 - Y_1) : (Z_2 - Z_1)$

Example 1 (Fig. 13): Determine the direction ratios of a line passing between points P_1 (7, 3, 6) and P_2 (13, 8, 9).

Dir. ratios $= (13 - 7) : (8 - 3) : (9 - 6)$
$= 6 : 5 : 3$

For convenience, the direction ratios are usually reduced so that the largest is equal to unity (1). This then makes the other two values equal to the tangents of the angles formed by the projection of the lines on the coordinate axis planes.

Direction ratios of the foregoing example would then be—

$$\frac{6}{6} : \frac{5}{6} : \frac{3}{6} \text{ Or } 1 : 0.83333 : 0.50000$$

in which 0.83333 is the tangent of the angle formed by the X axis and the projection of the line on the "X Y plane." At the same time 0.50000 is the tangent of the angle formed by the "X" axes and the projection of the line on the "X Z plane."

These direction ratios are sometimes designated in other forms, however, the most popular being the following two—

$1 : m : n$ or $A : B : C$

The m and n values are familiar to the reader as the slopes of the line in plan and front view. To distinguish the slope of a normal to a plane from that of a structural line, we therefore use the $A:B:C$ form.

Example 2: Find the direction ratios of the aileron hinge line having a sweepback of 12° and a rise in front view of 2° 30′.

Dir. ratios $= 1 : m : n$ or $1 :$ Tan 12° $:$ Tan 2° 30′
$= 1 : 0.21256 : 0.04366$

Equations of Canted Planes In the Wing

Any plane in space can be represented analytically by the general equation—

$$Ax + By + Cz + D = 0$$

Given the coordinates of any point lying within the desired plane, the value of D is known to be—

$$D = -(Ax_1 + By_1 + Cz_1)$$

By substituting into the original equation and by transferring quantities, the following general form for the equation of any plane in space may be found:

$$A(x - x_1) + B(y - y_1) + C(z - z_1) = 0$$

The general equation, as shown above, always represents a plane in which the coefficients A, B, and C are the direction ratios of the normal to the plane, while the x_1, y_1 and z_1 are the coordinates of any point lying on the plane.

Example 3: Given a plane passing through point P_1 (4, 6, 9) and having for the direction ratios of its normal 1:0.250:0.120, find through use of the general formula, the equation of the canted plane.

$$A(x - x_1) + B(y - y_1) + C(z - z_1) = 0$$
$$1(x - 4) + 0.25(y - 6) + 0.12(z - 9) = 0$$
$$X + 0.250\,Y + 0.120\,Z - 6.580 = 0$$

Example 4 (Fig. 14): Given the aileron previously mentioned, determine the equation of its inboard station constructed normal to the hinge line. The station passes through the hinge at a point on wing station 235 having coordinates of (235, 100, —5). The direction ratios of the normal, which is the hinge line, are 1:0.21256:0.04366.

$$A(x - x_1) + B(y - y_1) + C(z - z_1) = 0$$
$$1(x - 235) + 0.21256(y - 100) + 0.04366(z + 5) = 0$$
$$X + 0.21256\,Y + 0.04366\,Z - 256.038 = 0$$

Example 5 (Fig. 15): Determine the equation of a plane normal to the leading edge of the wing. This plane intersects the front spar at the wing reference trace and wing station 44, the coordinates of the point being (44, 41.5, 0) and the direction ratios of the L.E. being 1:0.240:0.080.

$$A(x - x_1) + B(y - y_1) + C(z - z_1) = 0$$
$$1(x - 44) + 0.240(y - 41.5) + 0.080(z - 0) = 0$$
$$X + 0.240\,Y + 0.080\,Z - 53.960 = 0$$

The above examples show that the equation of a canted plane can be found by using the coordinates of any point within the desired plane. It is not necessary to use the intersection of the hinge line with the plane at that point, though this is usually the most conveniently located point. It is, however, very important that the coordinates of the point be determined correctly and that all three values X, Y, and Z be used.

Many cases occur in the airplane when the equation of a canted plane is desired. However, quite often the plane is determined by some other factors than the direction of its normal. Many times the direction of the normal is not immediately available. A plane may be determined, for example, if two lines lying within the plane are given, or if the coordinates of three non-collinear points on the plane are known. Space does not permit us to demonstrate the methods used in this type of a problem. However, the author will be glad to answer any inquiries regarding these or any other feature of this series.

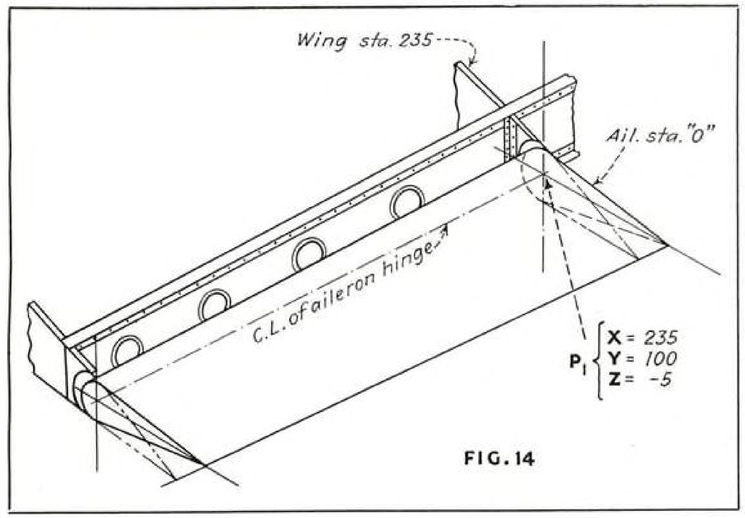

FIG. 14

True Angles Between Lines or Planes

Having found one of the uses for the direction ratios of a line, we now advance to other important uses for them—that is, in determining the true angle between any two lines in space. Once again we revert to a general formula for this information:

$$\cos\theta = \frac{A\,A_1 + B\,B_1 + C\,C_1}{\sqrt{A^2 + B^2 + C^2}\,\sqrt{A_1^2 + B_1^2 + C_1^2}}$$

The above equation is used when the angle between two lines L and L_1 is desired, the direction ratios of the two lines being respectively $A:B:C$ and $A_1:B_1:C_1$.

Example 6: Given two lines in space, whose directions are known, determine the true angle between the lines.

Direction ratios of L; 0.4 : 0.5 : 1
Direction ratios of L_1; 1 : 0.2 : 0.3

$$\cos\theta = \frac{0.4\,(1) + 0.5\,(0.2) + 1\,(0.3)}{\sqrt{(0.4)^2 + (0.5)^2 + 1}\,\sqrt{1 + (0.2)^2 + (0.3)^2}} = 0.634$$

Angle θ therefore is 50° 39′

Example 7 (Fig. 16): Given a control cable passing between three pulleys P_1, P_2, and P_3, design requirements make it necessary to determine the true angle formed by the cable as it passes over the middle pulley P_2. The location of the pulleys are given as follows:

P_1 (12, 40, 4) P_2 (20, 52, 6) P_3 (23, 60, 5)

Direction ratios between pulleys P_1P_2
8 : 12 : 2

Direction ratios between pulleys P_2P_3
−3 : −8 : 1

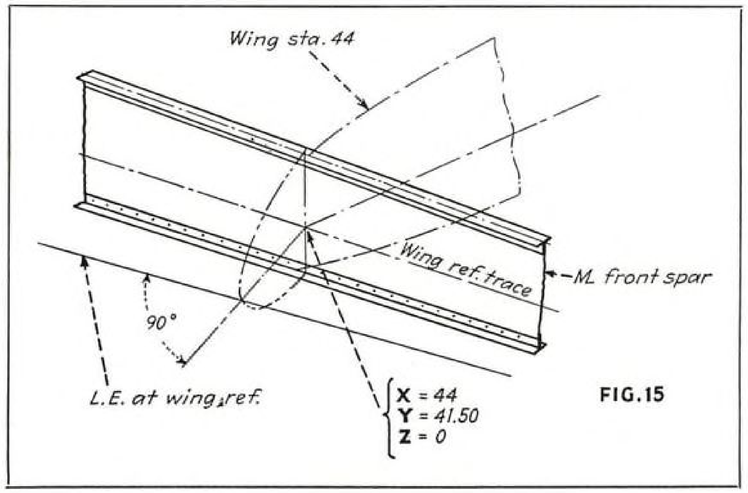

FIG. 15

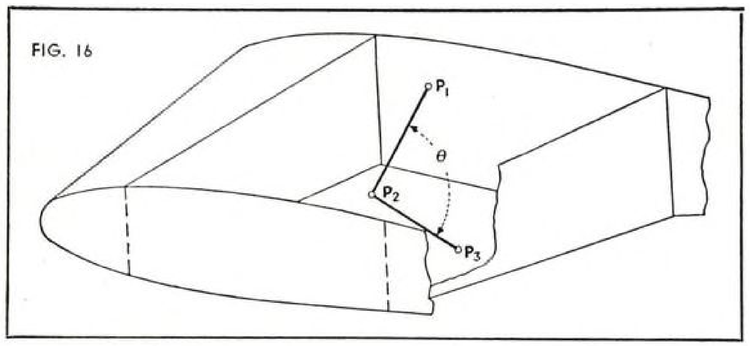

$$\text{Cos } \theta = \frac{8(-3) + 12(-8) + 2(1)}{\sqrt{8^2+12^2+2^2}\,\sqrt{(-3)^2+(-8)^2+1}} = -0.965$$

Therefore angle θ is 164° 48′

Whenever two lines intersect, there are always two different angles formed, an acute angle and the supplement. Therefore, it is important to realize that the formula obtains the angle between the positive directions of the two lines. The positive direction being the largest of the three direction ratios having a positive sign.

Example 8: When—

0.4 : 0.5 : 1 the positive direction is up.
8 : 12 : 2 the positive direction is aft.

Generally the angle can be determined approximately by observation, in order to make sure that the correct angle is being obtained.

True Angles Between Planes

Many examples occur in the airplane when the true angle between two intersecting structural planes is desired. This may happen in the case of (a) an attaching fitting between a canted wing station and a spar, (b) the attachment of two canted windshields, or (c) the attachment of a pulley bracket to a canted bulkhead.

In order to determine the structure required to correctly make these attachments, the true angle must be quickly and accurately obtained. Once again the use of analytic geometry will do the job quickly and with results far beyond the accuracy obtainable by present methods of descriptive geometry or by engineering layouts.

The true angle between two intersecting planes is always measured in a theoretical plane lying normal to the line of intersection. The true angle, therefore, can be proved to be equal to the angle formed by the intersection of two lines each normal to one of the planes (see Fig. 17).

Therefore, it is only necessary to have the direction ratios of the normal to the planes in order to solve for the true angle. These are found of course in the equation of the planes.

Example 9: A canted wing station intersects a skewed spar. In order to design an attaching forging it is necessary to know the true angle between the two planes. It is assumed of course that the equations of both canted structures are already known.

Equation of cant station.

$$X = 0.32\,Y + 0.15\,Z - 82 = 0$$

Equatisn of skewed spar.

$$0.2\,X + Y - 0.05\,Z - 100 = 0$$

$$\text{Cos } \theta = \frac{AA_1 + BB_1 = CC_1}{\sqrt{A^2+B^2+C^2}\,\sqrt{A_1^2+B_1^2+C_1^2}}$$

$$\text{Cos } \theta = \frac{1(0.2) + 0.32(1) + 0.15(-0.05)}{\sqrt{1+(0.32)^2+(0.15)^2}\,\sqrt{(0.2)^2+1+(-0.05)^2}} = 0.47327$$

The true angle of intersection is therefore **61° 45′**

Example 10: The outboard flap structural station is required to be parallel to the inboard station of the aileron in order to maintain a constant clearance for the movement of the aileron. Determine the true amount of cant which must be given to the regular flap station in order to conform to these requirements.

Equation of the flap station

$$X + 0.215\,Y - 0.099\,Z - 240 = 0$$

Equation of the aileron station

$$X + 0.052\,Y + 0.020\,Z - 225.83 = 0$$



The sum of the interior angles D, E, F, and G is equal to 360°
Angles G and E are each 90°
Angle F = 180°-Angle D
Angle θ = 180°-Angle D
Angle F = Angle θ

FIG. 17

$$\text{Cos } \theta = \frac{1(1) + 0.215(0.052) - 0.099(0.020)}{\sqrt{1+0.215^2+(-.099)^2}\,\sqrt{1+(0.052)^2+(0.020)^2}} = 0.98055$$

Angle θ = 11° 19′

The flap station must therefore be rotated 11° 19′ (true) in order to make it parallel to the aileron station.

Intersections of Lines and Planes

One of the benefits of the analytic geometry method of calculating the equations of lines and planes is the ability to determine their intersections. It makes no difference whether the plane is a simple wing station normal to the reference plane or a double canted bulkhead. The location of the point of intersection can be easily obtained.

Anyone familiar with the old method of finding the intersections of lines and planes realizes that it requires an involved layout and an excellent knowledge of descriptive geometry. When large layouts are required the accuracy obtainable is quite often inadequate and may be the cause for failure of structural parts to coordinate properly. By means of analytic geometry it is a simple matter to obtain the location of the point of intersection within 0.0001 in.

Intersections Involving Double Canted Stations

In solving the intersection points on a double canted station, it is necessary to use both the "Y" and "Z" equations of the line simultaneously. This is due to the fact that the surface of a double canted plane travels in three directions at once. This therefore requires that at least two of the unknowns be given in terms of the third in order to reach a solution.

Example 11: Determine the coordinates for the point of intersection between the rear spar upper ML and the canted wing station, when the equations of both are known.

Equations of spar ML: $Y = 0.075X + 95$
$Z = -0.050\,X + 16$

Equation of canted station: $X + 0.24\,Y - 0.06\,Z - 56.240 = 0$

Using the equations of the spar ML we may substitute the values of "Y" and "Z" into the equation of the canted wing station, thus leaving just one unknown which may be easily determined.

$$X + 0.24(0.075\,X + 95) - 0.06(-0.05\,X + 16) - 56.240 = 0$$
$$X + 0.018\,X + 22.8 + 0.003\,X - 0.96 - 56.240 = 0$$
$$1.021\,X = 34.400$$
$$X = 33.692$$

Now by substituting this value into the original equations of the spar ML the "Y" and "Z" coordinates may be obtained.

$$Y = 0.075(33.692) + 95 = 2.527 + 95 = 97.527$$
$$Z = -0.050(33.692) + 16 = -1.685 + 16 = 14.315$$

Example 12: Find the intersection point where a control cable passes through a

(*Turn to page* 269)

EQUIVALENT CHARTS For Aircraft Plumbing Fittings

They Speed Standardization at American Airlines

AT THE PRESENT TIME, there are three distinct types of fittings used in Army and commercial aircraft operated in the United States. They are the *AC*810 (*Parker Standard* type), the *AC*811 (*Parker Triple* type), and the *AN* type (see Fig. 1).

Purely in the interests of further standardization, many operating airlines are adopting one of these types throughout in their equipment. This constitutes quite a problem, since there are numerous connectors, elbows, tees, and crosses used in varying sizes and quantities in the various plumbing systems.

In an attempt to simplify the changeover program in American Airlines, a series of charts has been prepared (presented on the following pages). The charts outline *AN* fittings equivalent for *AC*810 and *AC*811 tube fittings, as well as *AN* pipe and hose fittings for existing *AC* and *Parker* types.

When replacing an *AC* tube fitting with an *AN* type, the mating fitting and all component parts (such as sleeves or connecting nuts) must also be replaced. This necessitates cutting the flares off existing lines, replacing existing fittings with *AN* type, and replacing lines. This may not be possible in all cases, since the existing lines may not be long enough for reflaring, in which case the lines would also be replaced.

Interchangeability

In most cases it is possible to substitute complete *AN* fittings (fittings, nuts, and sleeves) for *AC*811 or *NAF*. Exceptions will arise when straight threaded bosses are used, also in close installations where *AN* fittings will be too large. It is possible to interchange certain *AC* and *AN* components, as noted below. However, it is not good practice and should be avoided wherever possible.

Sleeves: The *AN*819 and *AC*811 "T" may be used interchangeably in all cases.

Nut and fitting bodies: Although the parts may appear to be the same, the threads on *AN* and *AC*811 type fittings are different in the ⅜, ½, ⅝, ¾, 1, 1¼, and 1½-in. sizes; therefore in these sizes the threaded fitting parts (nuts and fitting bodies) cannot be interchanged. In the other sizes (⅛, ¼, ⅜, ½, 1¼, and 2-in.) the threads are the same and thus *AC*811 "BT" nuts may be used with *AN* bodies. But even though the threads are the same, the *AN* nuts cannot be used on *AC*811 fitting bodies because the *AN* nut is longer and will bottom on the fitting shoulder before a tight seal is effected.

Tube flares: Because there is little difference between *AC* and *AN* flare angles, *AC*811 and *AN* tube flares or aluminum tube can be used interchangeably except in size #6. It is not recommended that *AN* and *AC*811 tube flares be used interchangeably on steel tubing.

Materials and Identification

Tube fittings: *AN* tube fitting bodies and nuts are available in steel and aluminum alloy. *AN*819 sleeves are available in Duronze III, cadmium or zinc plated, in addition to steel and aluminum alloy. Steel *AN* fittings may be identified by their black color and by the symbol "AN" stamped in the fitting (the manufacturer's trademark is also stamped in the fitting). Aluminum alloy fittings also bear the symbol *"AN"* as well as the trademark of the manufacturer and may be identified by their blue finish. Mating of steel with aluminum alloy fittings components is not recommended. In sizes ½ and larger, *AN* Duronze III sleeves may be used with either steel or aluminum fittings. In sizes smaller than ½ they can only be used with aluminum fittings. Duronze III sleeve may be identified by either a natural cadmium color or an olive drab color if zinc plated.

Hose and pipe fittings: *AN* type hose and pipe fittings are available in aluminum alloy and bronze. The same symbols present on *AN* tube fittings appear on hose and pipe fittings as well. The aluminum alloy fittings are blue. Bronze fittings are not plated or finished and may be identified by their natural bronze color.

Abbreviations: Designations "M.P.T." and "F.P.T." used on the following charts indicate male pipe thread and female pipe thread.

INDEX TO CHARTS

Tube Fittings . P. 166 to 177 Hose Fittings . P. 178 to 180 Pipe Fittings . P. 181 to 184

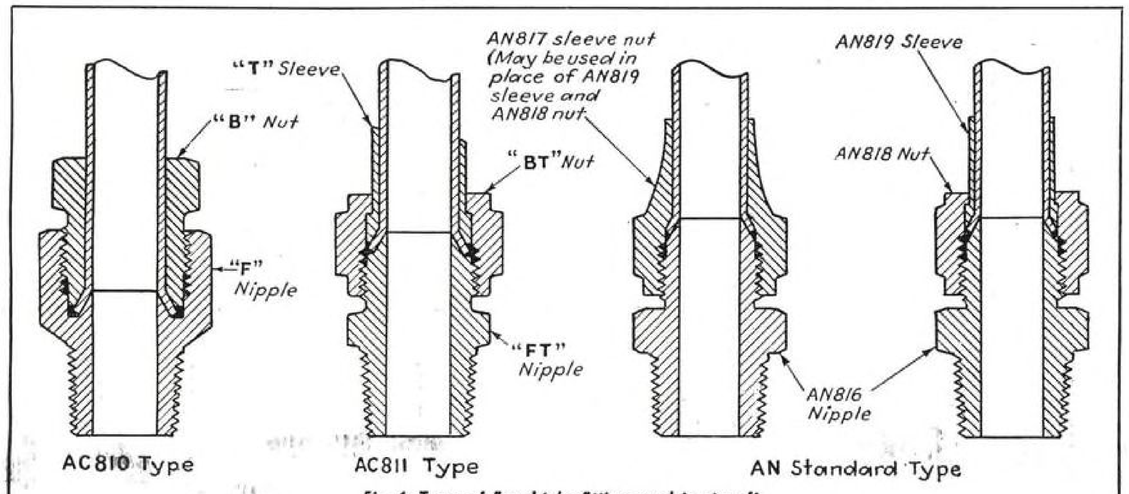

Fig. 1. Types of flared-tube fittings used in aircraft.

EQUIVALENTS CHART FOR TUBE FITTINGS

THIS AC 810 TYPE	OR THIS AC 811 TYPE	EQUALS THIS AN TYPE	THIS AC 810 TYPE	OR THIS AC 811 TYPE	EQUALS THIS AN TYPE
G NUT	T SLEEVE BT NUT	AN 819 AN 818	H UNION	HT UNION	AN 815
	T SLEEVE	AN 819	H UNION (COMB. SIZE)	HT UNION (COMB. SIZE)	AN 919
F NIPPLE	FT NIPPLE	AN 816	 G CONNECTOR	GT CONNECTOR	AN 816 AN 910
F NIPPLE (COMB. SIZE)	FT NIPPLE (COMB. SIZE)	IF M.P.T. IS LARGER USE AN 816 AN 912 IF M.P.T. IS SMALLER USE AN 816 AN 910 AN 912 AN 911	G CONNECTOR (COMB. SIZE)	GT CONNECTOR (COMB. SIZE)	IF F.P.T. IS LARGER USE AN 816 AN 912 AN 910 IF F.P.T. IS SMALLER USE AN 816 AN 910 AN 912
F N CAP	PNT PLUG NUT	AN 820 AN 815 OR  AN 814 AN 902	G ELBOW	ELBOWS GT ELBOW	AN 822
P N PLUG NUT	FNT CAP	AN 820	G ELBOW (COMB. SIZE)	GT ELBOW (COMB. SIZE)	IF M.P.T. IS LARGER USE AN 822 AN 912 IF M.P.T. IS SMALLER USE AN 822 AN 910 AN 912 AN 911

AVIATION, May, 1944

EQUIVALENTS CHART FOR TUBE FITTINGS

THIS AC 810 TYPE	OR THIS AC 811 TYPE	EQUALS THIS AN TYPE	THIS AC 810 TYPE	OR THIS AC 811 TYPE	EQUALS THIS AN TYPE
C - 45° ELBOW	CT - 45° ELBOW	AN 823	D - 45° ELBOW (COMB. SIZE)	DT - 45° ELBOW (COMB SIZE)	IF F.P.T. IS LARGER USE AN 823 AN 912 AN 910 IF F.P.T. IS SMALLER USE AN 823 AN 910 AN 912
C - 45° ELBOW (COMB. SIZE)	CT - 45° ELBOW (COMB. SIZE)	IF M.P.T. IS LARGER USE  AN 823 AN 912 IF M.P.T. IS SMALLER USE AN 823 AN 910 AN 912 AN 911	E ELBOW	ET ELBOW	AN 833 OR AN 821
D ELBOW	DT ELBOW	 AN 916 OR AN 816 AN 822 AN 910	E ELBOW (COMB. SIZE)	ET ELBOW (COMB. SIZE)	 AN 927 AN 902 AN 815 AN 902 AN 919
D ELBOW (COMB. SIZE)	DT ELBOW (COMB. SIZE)	 AN 916 AN 912 AN 816	E - 45° ELBOW	ET - 45° ELBOW	 AN 928 AN 902 AN 815 AN 902 OR AN-815 AN 837
D - 45° ELBOW	DT - 45° ELBOW	 AN 823 AN 910			

EQUIVALENTS CHART FOR TUBE FITTINGS

THIS AC 810 TYPE	OR THIS AC 811 TYPE	EQUALS THIS AN TYPE
E-45° ELBOW (COMB. SIZE)	ET-45° ELBOW (COMB. SIZE)	 AN 919 AN 902 AN 928 AN 902 AN 815
CC ELBOW-LONG	CCT ELBOW-LONG	 AN 916 AN 911 AN 816
CC ELBOW-LONG (COMB. SIZE)	CCT ELBOW-LONG (COMB. SIZE)	 AN 916 AN 912 AN 911 AN 816
CC-45° ELBOW-LONG	CCT-45° ELBOW-LONG	AN 823 AN 910 AN 911
CC-45° ELBOW-LONG (COMB. SIZE)	CCT-45° ELBOW-LONG (COMB. SIZE)	IF M.P.T. IS LARGER USE  AN 823 AN 912 IF M.P.T. IS SMALLER USE AN 823 AN 910 AN 912 AN 911

THIS AC 810 TYPE	OR THIS AC 811 TYPE	EQUALS THIS AN TYPE
 CCC ELBOW - EXTRA LONG	CCCT ELBOW - EXTRA LONG	 AN 916 THREADED PIPE AN 816
CCC ELBOW - EXTRA LONG (COMB. SIZE)	CCCT ELBOW - EXTRA LONG (COMB. SIZE)	IF M.P.T. IS LARGER USE  AN 916 THREADED PIPE AN 912 AN 816 IF M.P.T. IS SMALLER USE  AN 916 AN 912 THREADED PIPE AN 816
CCC-45° ELBOW - EXTRA LONG	CCCT-45° ELBOW - EXTRA LONG	AN 823 AN 910 THREADED PIPE

AVIATION, May, 1944

EQUIVALENTS CHART FOR TUBE FITTINGS

THIS AC 810 TYPE	OR THIS AC 811 TYPE	EQUALS THIS AN TYPE
CCC-45° ELBOW-EXTRA LONG (COMB. SIZE)	CCCT-45° ELBOW-EXTRA LONG (COMB. SIZE)	IF M.P.T. IS LARGER USE  AN 823 AN 912 AN 910 THREADED PIPE IF M.P.T. IS SMALLER USE AN 823 AN 910 AN 912 THREADED PIPE
TEES  J TEE	JT TEE	AN 824
J TEE (COMB. SIZE)	JT TEE (COMB. SIZE)	 AN 919 AN902 AN 926 AN902 AN 815 AN 902 AN 919
M TEE	MT TEE	AN 816 AN 917 AN 816

THIS AC 810 TYPE	OR THIS AC 811 TYPE	EQUALS THIS AN TYPE
 M TEE (COMB. SIZE)	MT TEE (COMB. SIZE)	 AN 816 AN 912 AN 917 AN 912 AN 816
 O TEE	OT TEE	AN 816 AN 917 AN 816
O TEE (COMB. SIZE)	OT TEE (COMB. SIZE)	AN 815 AN 912 AN 917 AN 912 AN 816
 R TEE	RT TEE	AN 826
R TEE (COMB. SIZE)	RT TEE (COMB. SIZE)	IF M.P.T. IS LARGER USE AN 826 AN 912 IF M.P.T. IS SMALLER USE AN 816 AN 912 AN 917 AN 912 AN 911 AN 816

EQUIVALENTS CHART FOR TUBE FITTINGS

THIS AC 810 TYPE	OR THIS AC 811 TYPE	EQUALS THIS AN TYPE
R—45° TEE	RT-45° TEE	 AN 915 + AN 826
R-45° TEE (COMB. SIZE)	RT-45° TEE (COMB. SIZE)	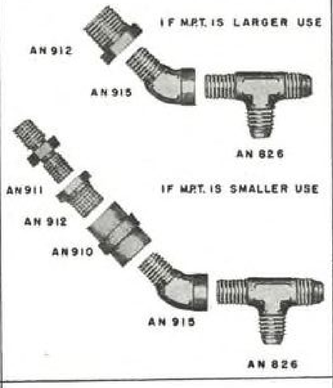 IF M.P.T. IS LARGER USE: AN 912, AN 915, AN 826; IF M.P.T. IS SMALLER USE: AN 911, AN 912, AN 910, AN 915, AN 826
S TEE	ST TEE	AN 825
S TEE (COMB. SIZE)	ST TEE (COMB. SIZE)	IF M.P.T. IS SMALLER USE: AN 816, AN 912, AN 917, AN 816; IF M.P.T. IS LARGER USE: AN 912, AN 825, AN 911, AN 912

THIS AC 810 TYPE	OR THIS AC 811 TYPE	EQUALS THIS AN TYPE
MM TEE	MMT TEE	AN 917, AN 816
MM TEE (COMB. SIZE)	MMT TEE (COMB. SIZE)	 AN 912, AN 917, AN 912, AN 816
MO TEE	MOT TEE	AN 816, AN 917
MO TEE (COMB. SIZE)	MOT TEE (COMB. SIZE)	AN 816, AN 917, AN 912, AN 912
MR TEE	MRT TEE	 AN 917, AN 911, AN 816

AVIATION, May, 1944

EQUIVALENTS CHART FOR TUBE FITTINGS

THIS AC 810 TYPE	OR THIS AC 811 TYPE	EQUALS THIS AN TYPE
MR TEE (COMB. SIZE)	MRT TEE (COMB. SIZE)	 AN 917, AN 912, AN 911, AN 912, AN 816
MS TEE	MST TEE	 AN 816, AN 917, AN 911
MS TEE (COMB. SIZE)	MST TEE (COMB. SIZE)	 AN 816, AN 917, AN 912, AN 912, AN 911
RO TEE	ROT TEE	 AN 816, AN 917, AN 911
RO TEE (COMB. SIZE)	ROT TEE (COMB. SIZE)	 AN 816, AN 912, AN 917, AN 911, AN 912

THIS AC 810 TYPE	OR THIS AC 811 TYPE	EQUALS THIS AN TYPE
RR TEE	RRT TEE	 AN 911, AN 917, AN 911, AN 816
RR TEE (COMB. SIZE)	RRT TEE (COMB. SIZE)	 AN 911, AN 917, AN 912, AN 911, AN 912, AN 816
RS TEE	RST TEE	 AN 816, AN 917, AN 911, AN 911
RS TEE (COMB. SIZE)	RST TEE (COMB. SIZE)	 AN 816, AN 917, AN 912, AN 911, AN 912, AN 911

EQUIVALENTS CHART FOR TUBE FITTINGS

THIS AC 810 TYPE	OR THIS AC 811 TYPE	EQUALS THIS AN TYPE	THIS AC 810 TYPE	OR THIS AC 811 TYPE	EQUALS THIS AN TYPE
 K CROSS	CROSSES KT CROSS	AN 827	 KS CROSS	KST CROSS	 AN 816 AN 816 AN 918 AN 816 AN 911
K CROSS (COMB. SIZE)	KT CROSS (COMB. SIZE)	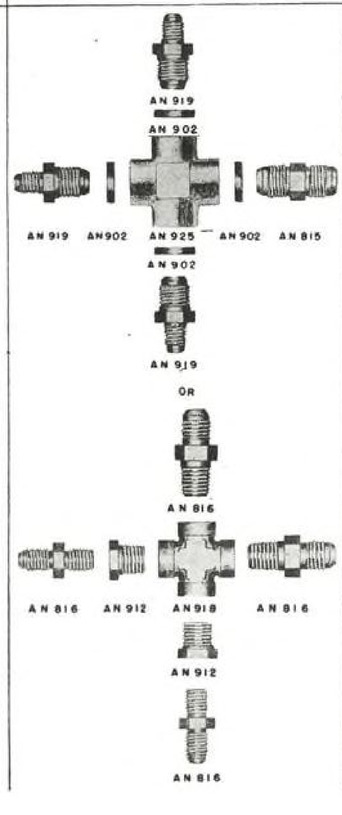 AN 919 AN 902 AN 919 AN902 AN 925 AN 902 AN 815 AN 902 AN 919 OR AN 816 AN 816 AN 912 AN 918 AN 816 AN 912 AN 816	 KS CROSS (COMB. SIZE)	KST CROSS (COMB SIZE)	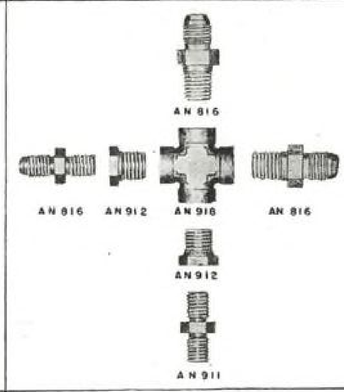 AN 816 AN 816 AN 912 AN 918 AN 816 AN 912 AN 911
			 KO CROSS	KOT CROSS	 AN 816 AN 816 AN 918 AN 816

AVIATION, May, 1944

EQUIVALENTS CHART FOR TUBE FITTINGS

THIS AC 810 TYPE	OR THIS AC 811 TYPE	EQUALS THIS AN TYPE	THIS AC 810 TYPE	OR THIS AC 811 TYPE	EQUALS THIS AN TYPE
KO CROSS (COMB. SIZE)	KOT CROSS (COMB. SIZE)	 AN 816 AN 816 AN 918 AN 912 AN 816 AN 912	KMS CROSS	KMST CROSS	 AN 816 AN 816 AN 918 AN 911
KMO CROSS	KMOT CROSS	 AN 816 AN 816 AN 918	KMS CROSS (COMB. SIZE)	KMST CROSS (COMB. SIZE)	 AN 816 AN 912 AN 816 AN 918 AN 912 AN 911
 KMO CROSS (COMB. SIZE)	KMOT CROSS (COMB. SIZE)	 AN 816 AN 816 AN 918 AN 912 AN 912	KOO CROSS	KOOT CROSS	AN 816 AN 918 AN 816
			KOO CROSS (COMB. SIZE)	KOOT CROSS (COMB SIZE)	 AN 816 AN 912 AN 918 AN 816 AN 912

173

EQUIVALENTS CHART FOR TUBE FITTINGS

THIS AC 810 TYPE	OR THIS AC 811 TYPE	EQUALS THIS AN TYPE	THIS AC 810 TYPE	OR THIS AC 811 TYPE	EQUALS THIS AN TYPE
KOS CROSS	KOST CROSS	 AN 816 AN 918 AN 816 AN 911	KRS CROSS (COMB. SIZE)	KRST CROSS (COMB. SIZE)	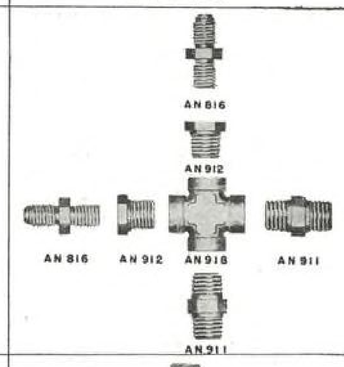 AN 816 AN 912 AN 918 AN 911
KOS CROSS (COMB. SIZE)	KOST CROSS (COMB. SIZE)	 AN 816 AN 918 AN912 AN 816 AN 912 AN 911	KSS CROSS	KSST CROSS	 AN 911 AN 816 AN 918 AN 816 AN 911
 KRS CROSS	KRST CROSS	 AN 816 AN 816 AN 918 AN 911 AN 911	KSS CROSS (COMB. SIZE)	KSST CROSS (COMB SIZE)	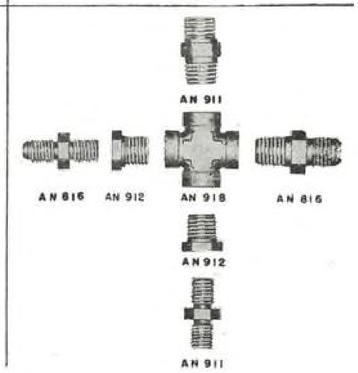 AN 911 AN 816 AN 912 AN 918 AN 816 AN 912 AN 911

AVIATION, May, 1944

EQUIVALENTS CHART FOR TUBE FITTINGS

THIS AC 810 TYPE	OR THIS AC 811 TYPE	EQUALS THIS AN TYPE	THIS AC 810 TYPE	OR THIS AC 811 TYPE	EQUALS THIS AN TYPE
 KMOO CROSS	KMOOT CROSS	AN 816 AN 918	 KMSS CROSS	KMSST CROSS	 AN911 AN 816 AN918 AN 911
 KMOO CROSS (COMB. SIZE)	KMOOT CROSS (COMB. SIZE)	AN816 AN912 AN 918	KMSS CROSS (COMB. SIZE)	KMSST CROSS (COMB. SIZE)	 AN 911 AN 912 AN 816 AN912 AN918 AN 911
KMOS CROSS	KMOST CROSS	 AN 816 AN 918 AN 911	 KROO CROSS	KROOT CROSS	 AN 816 AN 918 AN 911
 KMOS CROSS (COMB. SIZE)	KMOST CROSS (COMB. SIZE)	 AN 816 AN 912 AN 918 AN 912 AN 911	KROO CROSS (COMB. SIZE)	KROOT CROSS (COMB. SIZE)	 AN 816 AN 918 AN912 AN911

EQUIVALENTS CHART FOR TUBE FITTINGS

THIS AC 810 TYPE	OR THIS AC 811 TYPE	EQUALS THIS AN TYPE
KRSS CROSS (COMB. SIZE)	KRSST CROSS (COMB. SIZE)	 AN 911 AN 912 AN 816 AN 912 AN 918 AN 911 AN 911
	KT CROSS, BULKHEAD	 AN 815 AN 902 AN 832 AN 902 AN 925 AN902 AN 815 AN 902 AN 815
	KT CROSS, BULKHEAD (COMB. SIZE)	 AN 815 AN 902 AN 832 AN 902 AN 925 AN902 AN 919 AN 902 AN 919
KROS CROSS	KROST CROSS	 AN 911 AN 912 AN 918 AN 911 AN 816 AN 911
KROS CROSS (COMB. SIZE)	KROST CROSS (COMB. SIZE)	 AN 912 AN 911 AN 918 AN 911 AN 816 AN912
KRSS CROSS	KRSST CROSS	 AN 911 AN 911 AN 918 AN 911 AN 816

EQUIVALENTS CHART FOR TUBE FITTINGS

THIS AC 810 TYPE	OR THIS AC 811 TYPE	EQUALS THIS AN TYPE
	FLANGES	 AN 833 AN 902 AN 871
TCB 90° TANK FLANGE	TCT 90° TANK FLANGE	
TCB 45° TANK FLANGE	TCT 45° TANK FLANGE	AN 837 AN 902 AN 871
TFB TANK FLANGE	TFT TANK FLANGE	 AN 815 AN 902 AN 871

EQUIVALENTS CHART FOR HOSE FITTINGS

THIS PARKER OR AC STND. TYPE	EQUALS THIS AN TYPE	THIS PARKER OR AC STND. TYPE	EQUALS THIS AN TYPE	THIS PARKER OR AC STND. TYPE	EQUALS THIS AN TYPE
HLF HOSE NIPPLE (AC 835)	AN 840	HLC HOSE ELBOW (AC 850)	ELBOWS AN 842	HLC-45° HOSE ELBOW (AC 851)	AN 844
LHLF HOSE NIPPLE (AC 836)	AN 840	LHLC HOSE ELBOW (AC 852)	AN 842	LHLC-45° HOSE ELBOW (AC 835)	AN 844
HLF HOSE NIPPLE (COMB. SIZE) OR LHLF HOSE NIPPLE (COMB. SIZE)	IF M.P.T. IS LARGER USE AN 912 AN 840 IF M.P.T. IS SMALLER USE AN 911 AN 912 AN 910 AN 840	HLC HOSE ELBOW (COMB. SIZE) OR LHLC HOSE ELBOW (COMB. SIZE)	IF M.P.T. IS LARGER USE AN 842 AN 912 IF M.P.T. IS SMALLER USE AN 842 AN 910 AN 912 AN 911	HLC-45° HOSE ELBOW (COMB. SIZE) OR LHLC-45° HOSE ELBOW (COMB. SIZE)	IF M.P.T. IS LARGER USE AN 844 AN 912 IF M.P.T. IS SMALLER USE  AN 844 AN 910 AN 912 AN 911

AVIATION, May, 1944

EQUIVALENTS CHART FOR HOSE FITTINGS

THIS PARKER OR AC STND. TYPE	EQUALS THIS AN TYPE	THIS PARKER OR AC STND TYPE	EQUALS THIS AN TYPE	THIS PARKER OR AC STND TYPE	EQUALS THIS AN TYPE
HLL HOSE LINER (AC 875)	AC 875				
HLJ OR LHLJ HOSE TEE	TEES 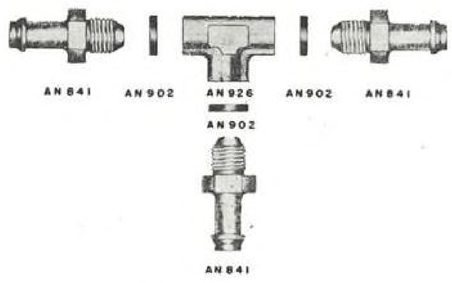 AN 841 AN 902 AN 926 AN 902 AN 841 AN 902 AN 841 OR AN 840 AN 917 AN 840 AN 840		HLJ OR LHLJ HOSE TEE (COMB SIZE)		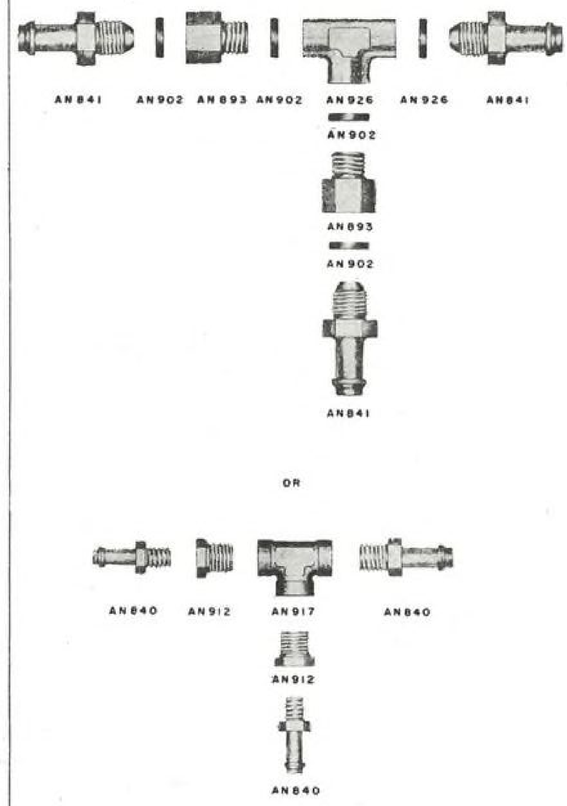 AN 841 AN 902 AN 893 AN 902 AN 926 AN 926 AN 841 AN 902 AN 893 AN 902 AN 841 OR AN 840 AN 912 AN 917 AN 840 AN 912 AN 840

EQUIVALENTS CHART FOR HOSE FITTINGS

THIS PARKER OR AC STND. TYPE	EQUALS THIS AN TYPE	THIS PARKER OR AC STND. TYPE	EQUALS THIS AN TYPE	THIS PARKER OR AC STND. TYPE	EQUALS THIS AN TYPE
HLR OR LHLR HOSE TEE	AN 840 AN 917 AN 911 AN 840	HLRS OR LHLRS HOSE TEE	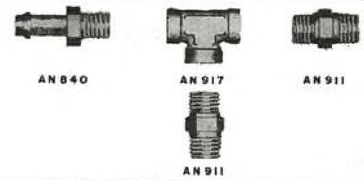 AN 840 AN 917 AN 911 AN 911		
HLR OR LHLR HOSE TEE (COMB. SIZE)	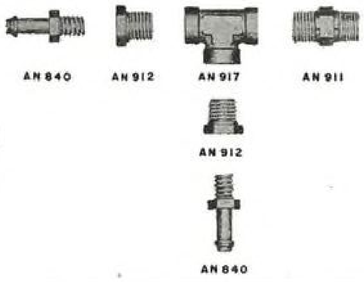 AN 840 AN 912 AN 917 AN 911 AN 912 AN 840	HLRS OR LHLRS HOSE TEE (COMB. SIZE)	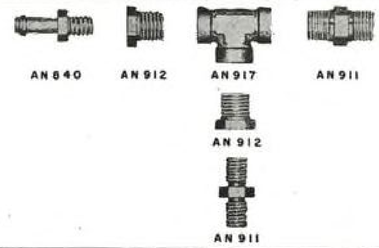 AN 840 AN 912 AN 917 AN 911 AN 912 AN 911		
HLS OR LHLS HOSE TEE	 AN 840 AN 917 AN 840 AN 911	HLRR OR LHLRR HOSE TEE	 AN 911 AN 917 AN 911 AN 840		
HLS OR LHLS HOSE TEE (COMB. SIZE)	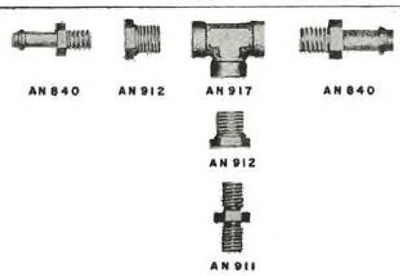 AN 840 AN 912 AN 917 AN 840 AN 912 AN 911	HLRR OR LHLRR HOSE TEE (COMB. SIZE)	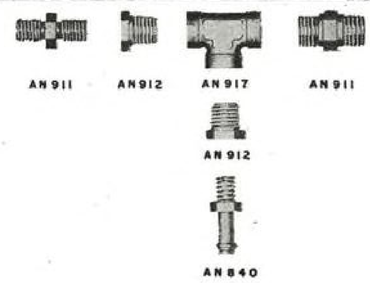 AN 911 AN 912 AN 917 AN 911 AN 912 AN 840		

EQUIVALENTS CHART FOR PIPE FITTINGS

THIS PARKER OR AC STND TYPE	EQUALS THIS AN TYPE	THIS PARKER OR AC STND. TYPE	EQUALS THIS AN TYPE	THIS PARKER OR AC STND. TYPE	EQUALS THIS AN TYPE
KMROS CROSS	AN 918 AN 911 AN 911	KMRSS CROSS (COMB SIZE)	 AN 911 AN 912 AN 912 AN 918 AN 911 AN 911	FLANGES TD 90° FLANGE	AN 914 AC 867
KMROS CROSS (COMB. SIZE)	AN 912 AN 912 AN 918 AN 911 AN 911	KRRSS CROSS	 AN 911 AN 911 AN 918 AN 911 AN 911	TD 45° FLANGE	AN 915 AC 867
KMRSS CROSS	AN 911 AN 918 AN 911 AN 911	KRRSS CROSS (COMB. SIZE)	 AN 911 AN 912 AN 911 AN 912 AN 918 AN 911 AN 911	TG FLANGE	AC 867

EQUIVALENTS CHART FOR PIPE FITTINGS

THIS PARKER OR AC STND. TYPE	EQUALS THIS AN TYPE	THIS PARKER OR AC STND. TYPE	EQUALS THIS AN TYPE	THIS PARKER OR AC STND. TYPE	EQUALS THIS AN TYPE
(AC 895-100 TO -105) (AC 895-70 TO -75) PIPE PLUG	AN 913	CD STREET ELBOW	ELBOWS AN 914	CR ELBOW	AN 914 AN 911
CAP	AN 913 AN 910	CD STREET ELBOW (COMB. SIZE)	IF M.P.T. IS LARGER USE AN 914 IF M.P.T. IS SMALLER USE AN 912 AN 914 AN 912	CR ELBOW (COMB. SIZE)	AN 914 AN 912 AN 911
FG CONNECTOR	AN 910 AN 911	CD 45° STREET ELBOW	AN 915	CR 45° ELBOW (COMB. SIZE)	AN 911 AN 915
FG REDUCING BUSHING (AC 895-80 TO -88)	AN 912	CD 45° STREET ELBOW (COMB. SIZE)	IF M.P.T. IS LARGER USE AN 915 IF M.P.T. IS SMALLER USE AN 912 AN 912 AN 915	CR 45° ELBOW (COMB. SIZE)	 AN 911 AN 912 AN 915
GG CONNECTOR (AC 895-50 TO -54)	AN 910				
GG CONNECTOR (COMB SIZE)	AN 910 AN 912				

AVIATION, May, 1944

EQUIVALENTS CHART FOR PIPE FITTINGS

THIS PARKER OR AC STND. TYPE	EQUALS THIS AN TYPE	THIS PARKER OR AC STND. TYPE	EQUALS THIS AN TYPE	THIS PARKER OR AC STND. TYPE	EQUALS THIS AN TYPE
DD ELBOW (AC 895-10 TO -16)	AN 916	FF PIPE NIPPLE (AC 895-90 TO -95) (AC 895-60 TO -66)	AN 911	MMS TEE	AN 917 AN 911
DD ELBOW (COMB. SIZE)	 AN 916 AN 912	FF PIPE NIPPLE (COMB. SIZE)	AN 911 AN 910 AN 912 AN 911	MMS TEE (COMB. SIZE)	AN 912 AN 917 AN 912 AN 911
DD 45° ELBOW (AC 895-20 TO -26)	AN 915 AN 910	MMO TEE (AC 895-30 TO -36)	TEES AN 917	MRO TEE	 AN 917 AN 911
DD 45° ELBOW (COMB. SIZE)	AN 912 AN 915 AN 910	MMO TEE (COMB. SIZE)	 AN 912 AN 917 AN 912	MRO TEE (COMB. SIZE)	 AN 912 AN 917 AN 911 AN 912

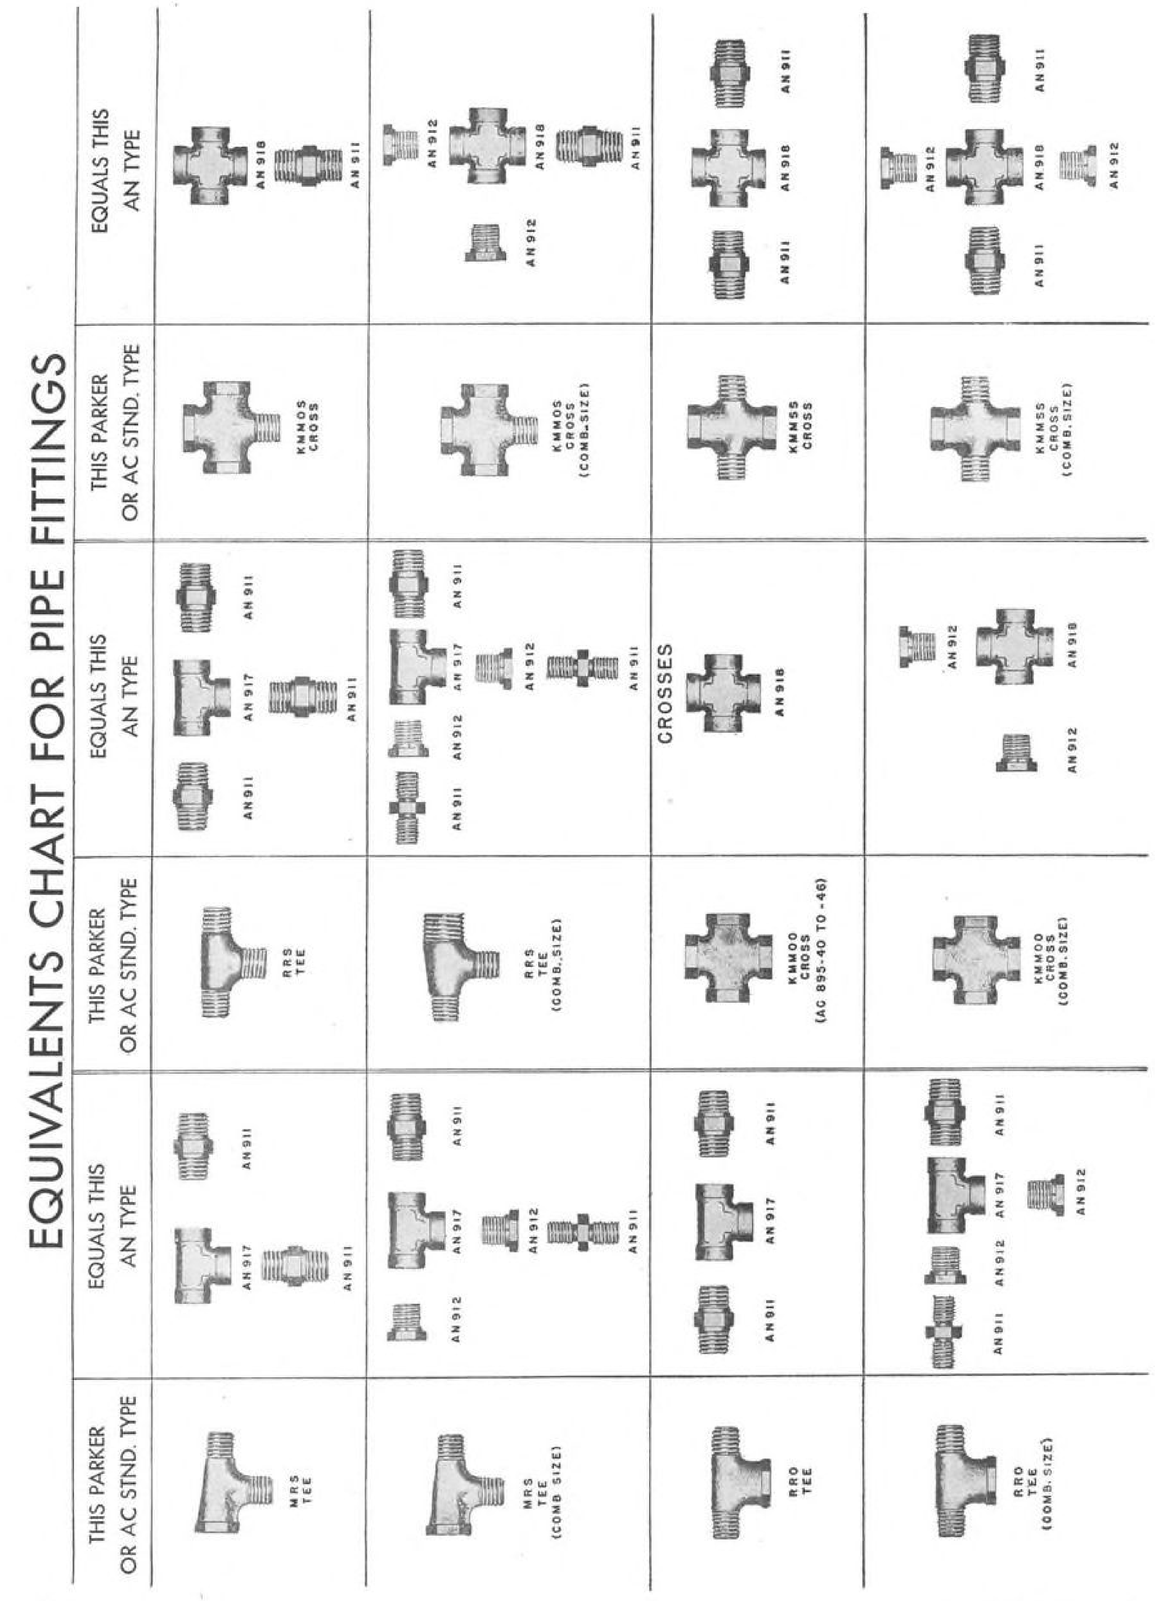

LOOKING AHEAD TO AIR CARGO MARKETS

PART II

By ROBERT K. KINZEL

Outlining basis for establishing volume-building commodity rates, together with essential policies to build sales and service organizations needed to get and hold "real" cargo tonnages.

ONE OF THE BIG PROBLEMS of aviation has been to increase payload factors. Before the war, domestic American lines were operating in most cases, on a load factor of less than 60 percent.

This did not mean that planes were going out only 60 percent loaded but rather that passengers and cargo were being dropped at stops along the route with not enough new passengers or cargo being loaded to keep the plane full.

The airplane's inflexible load-carrying capacity has, of course, been one of the major hurdles in the load factor picture; the airlines have not enjoyed the railroads' ability to "add another car" to take care of peak loads. One answer to this load factor problem is—on routes with sufficient traffic—to run several sections of a flight.

Thus, if there were five sections or planes for a given flight, the first four would be fully loaded, then the fifth would take the overflow, giving an overall load factor of, say, better than 80 percent. As the flight progressed, the number of sections could be reduced, even to the point of having but one plane complete the entire distance. At the same time, the number of planes could be increased wherever the traffic proved heaviest.

Outside of the United States, it is only since the war that service has been increased to daily flights from Miami down both the East and West Coasts of South America to Buenos Aires. In the Pacific, Singapore, Hongkong, and New Zealand were, prior to the war, served but once a week. It can thus be readily seen that cargo will have to be added to passenger and mail loads—as is usually done today—both to help increase frequency of flights by raising the load factor and to add extra sections.

To illustrate why the all-cargo plane will not immediately come into general use, let us analyze the plane requirements in the domestic field, where it is expected air traffic will first attain a high density. Based on a rail express market of about $200,000,000 per year, let us assume that 40 percent, or $80,000,000, moves by air (no small assumption, to be sure). At 15c. per ton-mile this would equal 533,000,000 ton-miles.

Further assuming that postwar cargo planes will have at least 7 tons payload, 200-mph. cruising speed, and can be operated 10 hr. a day, each plane could thus be counted on for 14,000 ton-miles per day, or 4,200,000 ton-miles over 300 days. Going back to the prewar 60 percent load factor, the net ton-miles per plane would be 2,520,000. On this basis, 210 planes would be capable of moving the entire business developed.

Such a small number of planes could not, of course, give the desired frequency of service. This, coupled with the fact that on many routes there would not be sufficient cargo business to warrant use of 7 ton-payload craft, would necessitate the use of smaller craft or combination passenger-cargo planes.

With some of the general outlines of the air cargo structure outlined, we now come to the core of the commercial problem: What must the airlines do to get the potential cargo business, conserva-

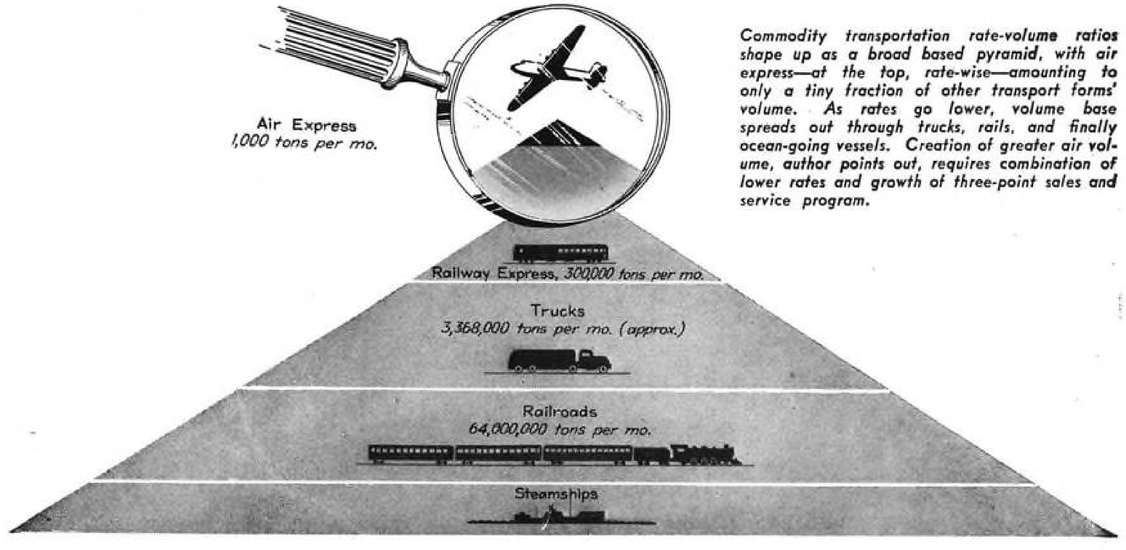

Commodity transportation rate-volume ratios shape up as a broad based pyramid, with air express—at the top, rate-wise—amounting to only a tiny fraction of other transport forms' volume. As rates go lower, volume base spreads out through trucks, rails, and finally ocean-going vessels. Creation of greater air volume, author points out, requires combination of lower rates and growth of three-point sales and service program.

tively estimated at a minimum of ten times the prewar volume, at rates but a quarter as high?

Obviously, business won't come in by itself; a constructive sales and service policy is essential, a policy embracing four essential points.

The first covers ground service. Adequate, speedy pickup and delivery are both essential, not only to maintain the advantages of speed inherent to air transport, but to meet competition of surface transportation. In this country, the Railway Express Agency, with an investment of some $26,000,000 in equipment and vehicles, has ample facilities, not only for quick pickup and delivery at airport cities but, through its rail service, to forward shipments to and from all points with rail service—some 23,000 cities and towns.

There is, however, a possibility that the domestic airlines may not continue indefinitely their contracts with REA, in which event it will be necessary to offer comparable service, either through a large over-all pickup and delivery organization or by agreements with smaller companies in individual cities or areas.

The foreign field has such a variety of ground services—or lack of them—that generalizations are impossible. In some places pickup and delivery are available; in others the shipper himself must get his consignment to or from the airport.

In Europe, it is believed that little difficulty should be encountered in making tie-ups with railroads for pickup and delivery. In other parts of the world, though, it is apparent the airlines will have to establish their own local trucking services which, if efficiently managed, should prove a very profitable adjunct.

It is evident that, with both ground and air competition constantly increasing, adequate ground service will have to be offered if the airlines are to make sizable penetrations in the express and cargo fields. As an example of the importance of this service, a Cuban importer recently reported he specified that all shipments under 200 lb. be sent him by air express, solely because of the efficient delivery service offered by the airline in Havana. He felt that in the long run he was saving money by paying air express rates and getting prompt store-door delivery at a modest charge, rather than having to send his own truck on a special trip and make his driver go through all the red tape of getting the shipment through customs and to the plant.

The second major policy covers what might well be called the service division, which would be established as part of the sales department. A large percentage of the shippers who use air service regard transportation as a minor part of their business. To them transportation is an evil necessary to complete their sales; it is a nuisance they try to minimize by seeking the easiest way to ship.

The type of shipping service which will gain and hold customers must permit this easiest way of shipping. Tariffs must be easy to understand, thus giving the cargo service man an entree. Shipping departments always have small questions which can be readily answered by service men—items such as complaints about pickups or tardy settlements of claims; questions on whether lighter packing might be used or what documents are required in certain countries; or an explanation of liability coverage or insurance under the bill of lading.

A large group of airline cargo service men could easily be kept busy visiting thousands of potential shippers and going over individual problems of new personnel in shipping rooms of regular shippers. But in addition to their straight "service" work, these men could also do considerable selling and, most important, keep management informed of potential business which can be solicited by trained specialists.

The third major policy involves consistent advertising to back up both the trained sales specialists and the service men. Although air express has been available for 15 yr., informal surveys have shown that almost no shipper can estimate its cost within 10 percent. Nor are there more than a very rare few who can give accurate estimates on air transportation's time saving ability. Even fewer realize that documents required for air shipments are much simpler than those required for ocean transport; that Cuba, Mexico, Brazil, and Trinidad required no documents for goods moving by air.

These are but a few of the major points providing advertising themes. The service mens' reports will uncover any number of other features by which advertising can promote air shipments.

The fourth major policy involves commodity rates. The new business which the airlines must and shall develop will obviously require specially trained salesmen of high caliber, for on their shoulders will fall the major responsibility of getting volume business, business which it

(*Turn to page 267*)

Though cargo business will develop rapidly, visionaries' dream pictures of huge fleets of cargo planes are felt to be far in future—in fact it is believed that combination passenger-mail-cargo type craft will continue in use for some years.

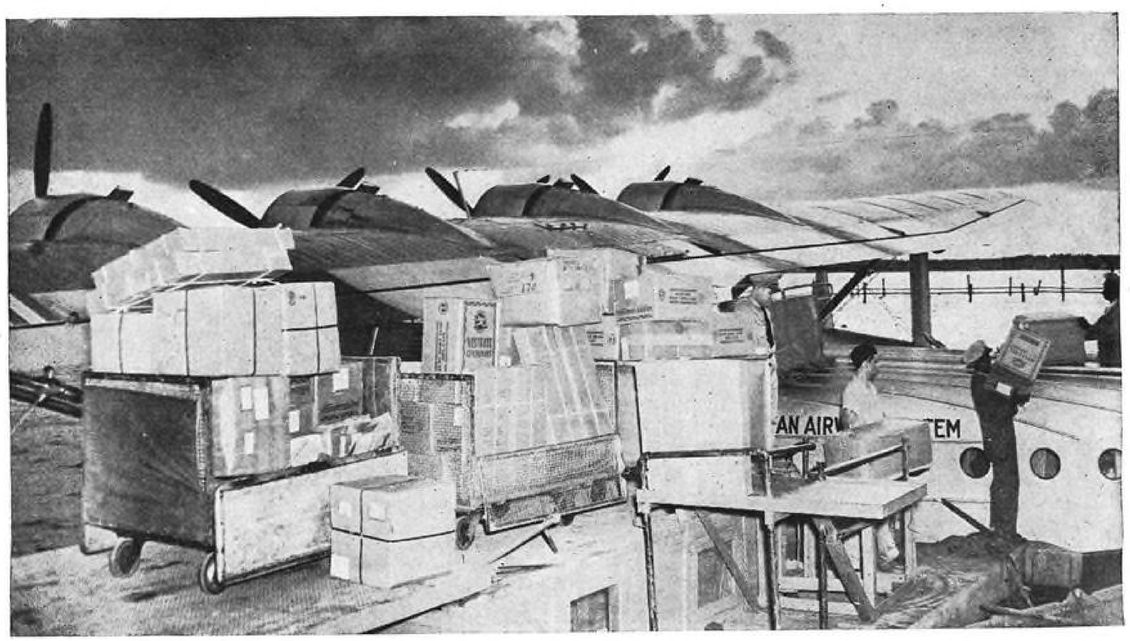

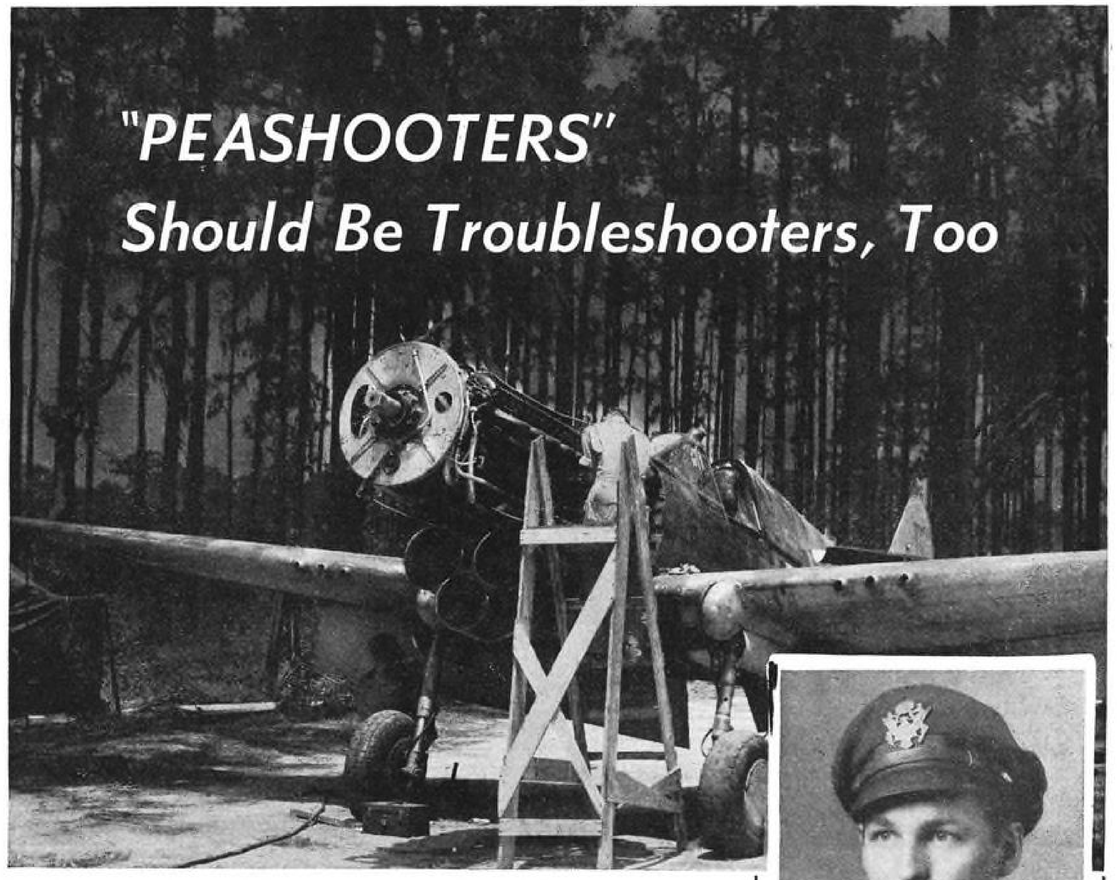

"PEASHOOTERS" Should Be Troubleshooters, Too

By John S. Miller, *1st Lt., Air Corps*

Fighter pilots share an important responsibility with their crew chiefs in keeping aircraft in operation against the enemy. Here are some important tips for new battlefront pilots—tips which will serve them and their squadrons well.

A PLANE that cannot be "put on alert" is not worth a damn to anybody at a front-line fighter base. In the South Pacific area there never has been a surplus of airplanes, and each one in fighting shape seems more precious than life itself to the personnel operating in that theater.

In short, whatever it takes to keep equipment in flying condition assumes more importance than almost anything else. Accordingly, practically everybody is maintenance-minded—and if the fighter pilot isn't, he *should* be.

Few people think of the pilot as a factor in maintenance, and in many cases not enough pilots are fully aware of their importance to the maintenance function. The pilot has a perfect right to expect his plane to be kept in top-notch condition—but the crew chief, like the doctor with his patient, can do his job best when the pilot, who is experiencing the trouble, helps with the diagnosis and (when feasible) with the cure.

The essentials of keeping equipment operating against the enemy are few but intricate within themselves. First, the equipment must be of rugged design and inherently trouble-free. Second, supply must be established as the life blood of operations. A highly trained maintenance organization is a mockery without adequate provision for spare parts supply. The third factor combines the flight crew and ground crew on the line. Neither crew can work alone to get the desired results; teamwork is the essential operating requirement.

The fighter pilot is busier than the proverbial one-armed paper hanger. In flight he is, to take a bomber crew for analogy, the pilot, co-pilot, bombardier, gunner, avigator, radio operator, and flight engineer all wrapped into one. Generally speaking, only the combat-ex-

LT. MILLER returns from 17-months duty as a fighter pilot in the Southwest Pacific with sober thoughts on the less glamorous, but nonetheless important, responsibilities of a combat pilot operating from front-line flight strips. Member of a Group twice cited by the President (more enemy aircraft were shot down by this Group than by any other in the Air Forces), he credits much of the excellent combat performance to fine cooperation between pilots and crew chiefs. He reports that the bulletins most prominently displayed in the operations shacks were servicing reports. Lt. Miller firmly believes that there was a lot more than coincidence in the establishment of both an astonishing Group combat record (over 400 aircraft) and an outstanding maintenance record.

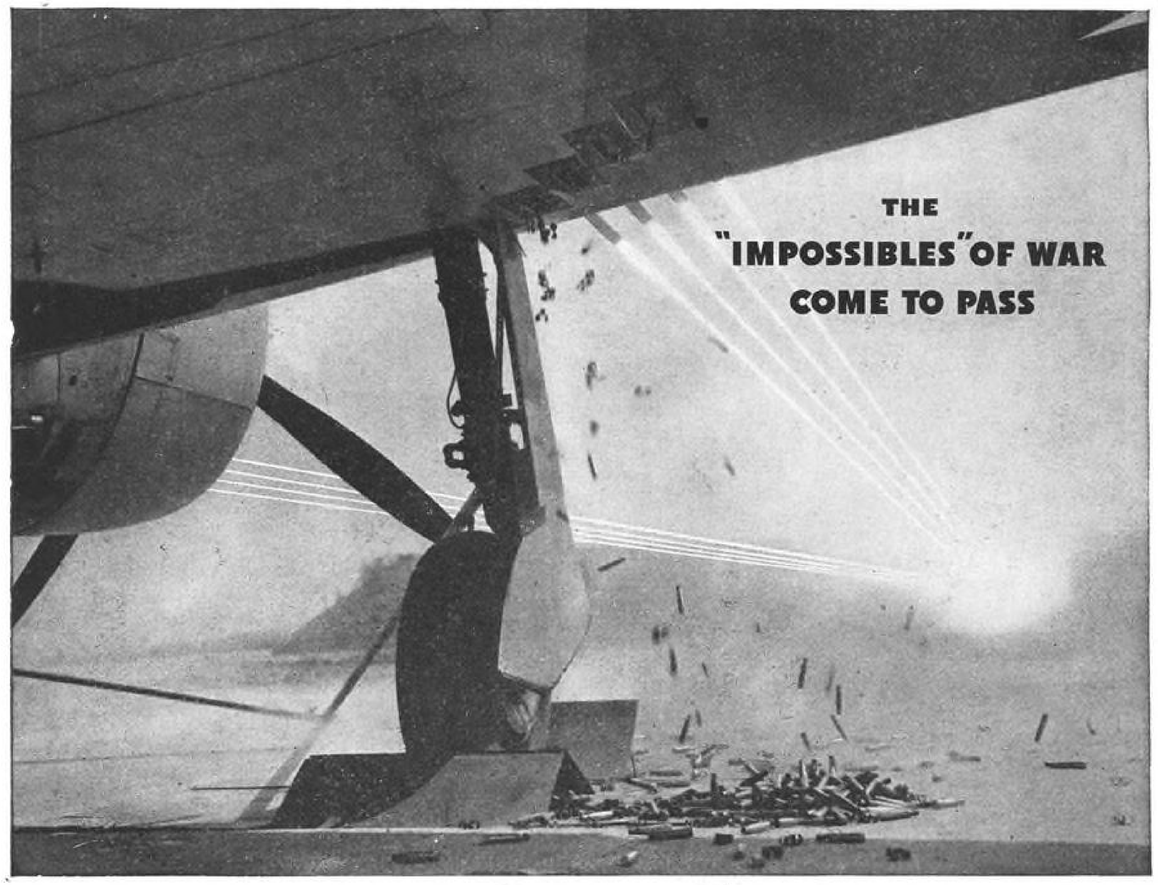

"WE must some day be able to see enemy targets through the thickest fog and the blackest night . . . a single American soldier must be made a match for an enemy tank . . . we must be able to land armies upon every kind of fortified coast . . . we must send fighter planes seven miles into the sky, if need be, to smash enemy bombers from above . . ."

Thus read the notebooks of military strategy, not so long ago, listing things of war that were out of this world . . . the "impossibles" of the peacetime Sunday supplements.

But war is a relentless taskmaster. And so today we have a parade of "impossibles" of amazing variety—radar, the bazooka, unique troop landing craft . . . and an airplane that fights seven miles up, dives at speeds approaching the speed of sound, spits out more than ten pounds of steel projectile per second!

That airplane is the Thunderbolt — the joint product of an A.A.F. Matériel Command that knew what it wanted . . . and a corps of Republic engineers who knew it could be done. It is out of many such combinations that this nation is becoming invincibly armed . . . and its aerial supremacy made secure for the future.

Not the least "impossible" aspect of the Thunderbolt was its *production*. How could so intricate and elaborate a machine ever reach "quantity production"?

Yet, in a recent month, more planes came off the Republic Thunderbolt assembly lines than came from the assembly lines of any other company in America producing fighter-type aircraft.

Republic, along with every other war material manufacturer, working hand in hand with the Army Air Forces, is ready for still more "impossibles." Republic Aviation Corporation, Farmingdale, L. I., New York, and Evansville, Indiana.

Republic *firsts* in war point to *firsts* in peace

REPUBLIC AVIATION
CORPORATION
Specialists in High-speed, High-altitude Aircraft
FARMINGDALE DIVISION
Write that boy today — V-Mail

perienced fighter pilot realizes how much of a "flight engineer" he has to be to get the best operating results. Actually, the only difference between himself as a flight engineer and the bomber flight mechanic is that he is not required to do the actual repair and servicing work.

However, his responsibility does not end with saying to the crew chief, "The damned thing doesn't run right." His salvation, in fact, may depend on telling his crew chief precisely and accurately which specific part is not functioning correctly, and the more he knows about *why* it is malfunctioning (and in many cases, what to do about it) the better the entire operating team will function.

Excluding the supply factor, the smallest self-contained combat unit in a fighter command is the squadron. The team nucleus is the fighter pilot and his crew chief, who are directly responsible for employing the fighter plane to best advantage against the enemy. The crew chief and his assistant are expert technicians capable of servicing all working parts of the aircraft, including both rigging and engine. In charge of the crew chiefs is the line chief, who is consulted when any special difficulties are encountered. An engineering officer directs all maintenance functions of the squadron, and he reports directly to the squadron commanding officer.

The pilot is in supreme command of his airplane, both in the air and while on the ground, except when the plane is grounded by the inspector or engineering officer. He reports to the operations officer who, in turn, reports to the squadron C. O.

Paperwise, the principal liaison instrument in this setup is Form 1-A—the engineering report on the airplane which records its status at all times (see Fig. 2). Filled out, this form represents the "on the record" interchange of information between the pilot and crew chief. Theoretically, the space designated, "Remarks: Pilot and Mechanics," is where the pilot tells the crew chief "all about it" when he returns from a flight. He does, in fact, briefly jot down his story for the record. However, many maintenance man-hours may be saved by taking a little more time—i.e., sitting down and thinking and talking the thing through with the crew chief.

By virtue of the fighter plane's "accommodations," the crew chief is generally never there when the trouble develops. Always on the ground, he depends entirely on what the pilot tells him. It follows, then, that the fighter pilot must learn to be a troubleshooter—and the better he becomes at it, the quicker the trouble can be corrected.

In complex machines such as the modern combat plane, there is a very involved inter-relationship between mechanism and system. Failure or malfunctioning indicated at one point may be *caused* at an entirely different location. For example, fluctuation of the tachometer may indicate propeller surging—and the pilot, after observing such tach hopping, may cut short his mission and return to his field. But such trouble may actually lie in a faulty tachometer, and if that's the case the time taken to dismantle the propeller must be credited to the enemy's advantage. A more alert pilot could tell by watching and listening to the propeller that the instrument indication was in error.

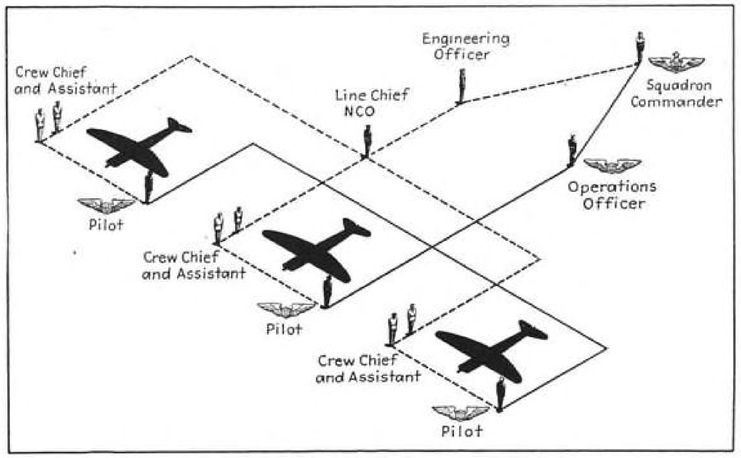

Fig. 1. Diagram of fighter squadron elements showing relationship of members. To each aircraft is assigned a pilot, crew chief, and assistant to crew chief. Pilot reports to commanding officer through operations officer. Crew chiefs are supervised by line chief, who reports to engineering officer.

Each airplane has its idiosyncrasies, and a pilot who learns to spot the difference between them and real trouble will save a great deal of servicing time. A ship may develop strange sounds, the engine may run roughly, or some of the instruments may be a little off. With a little experience the pilot can learn to recognize them as nothing serious and accordingly he will not order the plane off alert when it may be badly needed. He can save the crew chief a lot of needless work (the man's plenty busy anyway) if he tells him about such plane characteristics so that a new pilot flying the plane can be informed properly and not return from an incompleted mission with orders for a thorough check.

A great deal of mechanical trouble is just plain pilot trouble. Many are the hours put in by the crew chief trying to

(*Turn to page* 271)

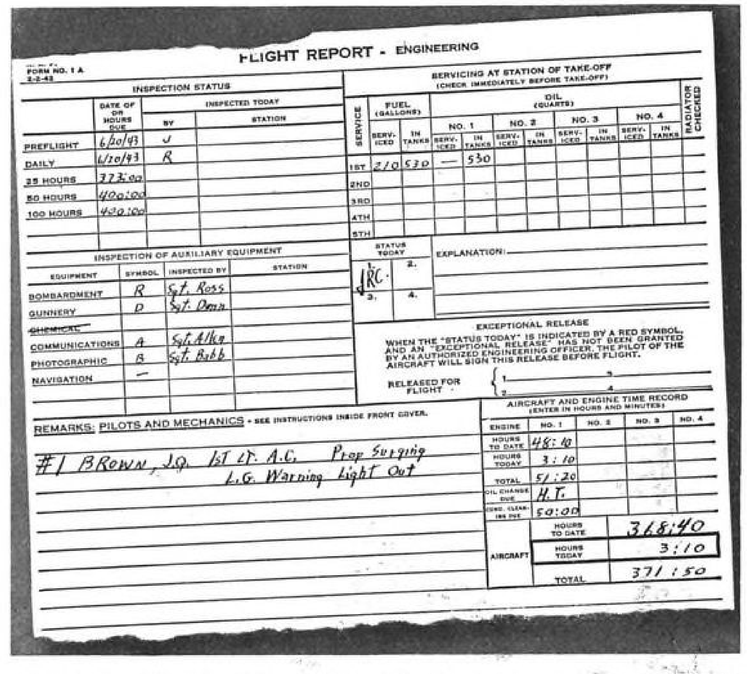
FLIGHT REPORT - ENGINEERING

FORM NO. 1 A 2-2-43

INSPECTION STATUS

	DATE OF OR HOURS DUE	INSPECTED TODAY BY	STATION
PREFLIGHT	6/20/43	J	
DAILY	6/20/43	R	
25 HOURS	373:00		
50 HOURS	400:00		
100 HOURS	450:00		

INSPECTION OF AUXILIARY EQUIPMENT

EQUIPMENT	SYMBOL	INSPECTED BY	STATION
BOMBARDMENT	R	Sgt. Ross	
GUNNERY	D	Sgt. Dean	
~~CHEMICAL~~			
COMMUNICATIONS	A	Sgt. Allen	
PHOTOGRAPHIC	B	Sgt. Babb	
NAVIGATION	—		

SERVICING AT STATION OF TAKE-OFF (CHECK IMMEDIATELY BEFORE TAKE-OFF)

SERVICE	FUEL (GALLONS) SERV-ICED	FUEL IN TANKS	OIL (QUARTS) NO. 1 SERV-ICED	NO. 1 IN TANKS	NO. 2 SERV-ICED	NO. 2 IN TANKS	NO. 3 SERV-ICED	NO. 3 IN TANKS	NO. 4 SERV-ICED	NO. 4 IN TANKS	RADIATOR CHECKED
1ST	270	530	—	530							
2ND											
3RD											
4TH											
5TH											

STATUS TODAY: 1. RC. 2. 3. 4.

EXPLANATION:

EXCEPTIONAL RELEASE

WHEN THE "STATUS TODAY" IS INDICATED BY A RED SYMBOL AND AN "EXCEPTIONAL RELEASE" HAS NOT BEEN GRANTED BY AN AUTHORIZED ENGINEERING OFFICER, THE PILOT OF THE AIRCRAFT WILL SIGN THIS RELEASE BEFORE FLIGHT.

RELEASED FOR FLIGHT 1. 2.

REMARKS: PILOTS AND MECHANICS - SEE INSTRUCTIONS INSIDE FRONT COVER.

#1 BROWN, J.Q. 1st Lt. A.C. Prop Surging L.G. Warning Light Out

AIRCRAFT AND ENGINE TIME RECORD (ENTER IN HOURS AND MINUTES)

ENGINE	NO. 1	NO. 2	NO. 3	NO. 4
HOURS TO DATE	48:40			
HOURS TODAY	3:10			
TOTAL	51:20			
OIL CHANGE DUE	H.T.			
CONG. CLEAN-ING DUE	50:00			

AIRCRAFT	
HOURS TO DATE	368:40
HOURS TODAY	3:10
TOTAL	371:50

Fig. 2. Form 1-A is engineering report on aircraft. It is the instrument through which pilot reports mechanical troubles to engineering section of squadron.

AIRPORT + RESORT = NEW BUSINESS

Making private flying facilities an integral part of larger operation, such as year-'round country hotel, can assure operators a steadier income. Here's the case history of an air-resort that has survived the war and looks forward to expansion.

AS PRIVATE FLYING has developed thus far, the airport has been a unit *per se*—it has been the attraction around which have clustered "side shows" that have, in too many cases, been so shoddy as to discourage patronage of people who could and would like to do business with aviation operators.

Future growth of private flying demands a vast expansion in the number of landing facilities, which brings up this logical question: Why not make the airport an adjunct to a complete unit which will attract non-flyers to flying and at the same time attract flyers to it?

That such a program is not only possible, but can be profitable—even under wartime conditions—is exemplified by Rocco's Villa Sunset, near Blairstown, in northwestern New Jersey at the base of the Kittatinny Mountains. Here is a case of the resort coming first, though by but a short time, and the airport being set up as an auxiliary. As it has been managed, the resort has attracted flyers, and the flying has attracted other patrons.

First unit of the Villa was built in 1927 overlooking Lake Susequehanna, which lies adjacent to a good sweep of level ground just five minutes walk from the lodge. R. B. Bunino, the proprietor, was and is a flying enthusiast, which meant but one thing — use of that level ground as an airport. Two small, inexpensive lean-to hangars served as the nucleus for flying activities that, for a time, were largely confined to spring and summer week ends.

"Rocco" Bunino (right, facing camera) welcomes a flying guest to Villa Sunset for summer week end. Plans for this airport—an integral part of resort—include expansion of present 2,100 ft. runway in anticipation of rapid growth of private flying.

Meanwhile, development was pushed on the main portion of the resort to build it into a year-'round operation, with today's capacity standing at approximately 50 over-night guests. Naturally, the largest volume of prewar business was in the summer time, with swimming, boating, flying, and just keeping cool the main attractions. However, the Villa's location made it possible to develop a good sportsmen business, for the hunting season opens around October 1.

This was followed by the winter sport season, with a tobaggan slide, ski tow, and ice skating facilities giving all the desired variety. Again location played an important part in the development, for the fishing season, running from April through September, brought numerous additional guests.

One of the principal reasons for steady growth and repeat patronage has been due to the owner's continued maintenance of a good kitchen; Sunset's reputation for consistently excellent food spread out not only to a comfortable driving radius but, in many cases, to week-end flying range.

Typical prewar line-up of personal planes on week end. Guests have been attracted to resort by flying facilities, and introduction of other guests to flying has helped attract new devotees to aviation with result that resort has done consistently better business.

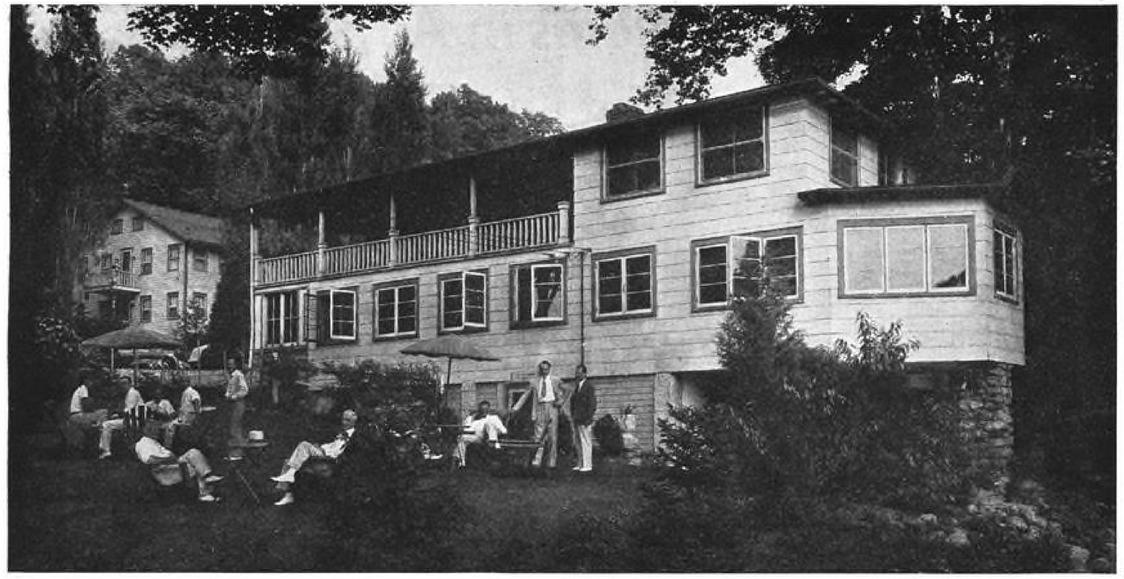

A year-'round resort, known for its food and accessibility to hunting and fishing, Villa Sunset, has added private flying as a vital, but not all-important, adjunct. Used for a time as a WTS flying school, Villa Sunset has helped keep private flying alive through war years.

Instead of killing the Villa's aviation business, the war has in fact brought additional development. When the WTS program was in need of more and more facilities, the lodge was closed to the public and became a flying school from which two good sized classes were graduated.

To accommodate this flight training program, a 60 by 80-ft. hangar and a 30 by 40-ft. shop were built. Moreover, the field itself was improved; it is currently 800 ft. wide by 2,100 ft. long, with unobstructed approaches from both ends. Additional stump clearing is planned for the near future, which will extend the field to 2,300 ft. in length.

Completion of the WTS program did not, however, put an end to flying activities. Since the field is just outside the "sensitive zone" which the Army closed to private flying, the field became the base for nine personal aircraft owners who wanted to keep up their time. Meanwhile, a deal was worked out with a fixed base operator, who thereupon moved three planes to the Villa's field.

These craft have been kept busy, especially on week ends, both for dual instruction and solo flying. For instance, one group of five aircraft plant workers each week spend their day off at Sunset, building up flying time, enjoying good food, and relaxing. The location has been a favorite of Civil Air Patrol members; they received a special welcome the first time the field was used as a base for maneuvers, and many have come back every available week end to get in flight time.

Although Villa Sunset could be operated successfully without flying, there is no intention of dropping these facilities, the owner told AVIATION. In fact, he points out, private flying will be developed even more in the future as an integral part of the resort's operations. "Heretofore most of our patrons have come by automobile," he said, "and since the airplane offers a much greater range, we will make every effort to secure our share of the business which will be made possible by the expansion of private flying."

On the basis of this one successful operation of an airport as an auxiliary, it need not be assumed that every fixed base operator should or must become a resort owner or similar type of businessman—any more than that every innkeeper should or must become an airport operator. But the fixed base operator who does set his operations up so that flying becomes an integral part of a multi-faceted business, or who teams up with someone who has such an enterprise, stands to make more than a bare living over a longer period of time.

Ski tow at Villa Sunset, near Blairstown, N. J. With privately owned airport open for year-'round operations, future guest list is expected to grow in proportion to growth of private flying.

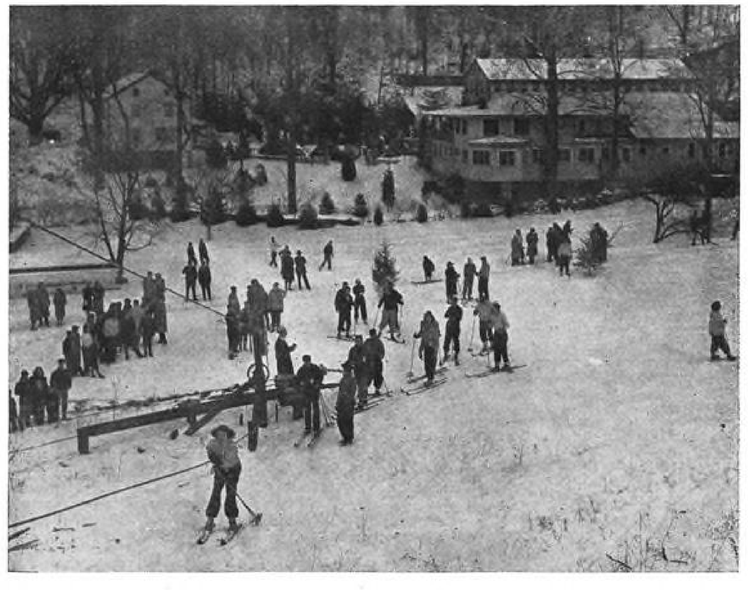

Intercooling Problems in Airplane Design*

By **HOLLEY B. DICKINSON**
Lockheed Aircraft Corporation

THE CAPACITY of the charge-air cooling system is generally limited to the absolute minimum that will permit the utilization of the engine and supercharger capacity to the desired degree under the most severe atmospheric conditions at which operation is necessary. Since this usually requires an intercooler larger than the optimum for typical atmospheric conditions, the determination of optimum intercooler size has little significance to the airplane designer.

Many of the factors which enter into the selection of the type and capacity of charge-air cooling installations are difficult to subject to quantitative analysis. Among these are problems of simplicity, maintenance, accessibility, and arrangement of the engine installation. In general, however, the difficulty of installation of the charge-air system is out of proportion to the core size. The weight increase due to the system, for instance, is in the neighborhood of five times the weight of the air-to-air intercooler core.

The use of a liquid-to-air aftercooler system as opposed to an air-to-air intercooler system shows promise only in applications with liquid-cooled engines where the separation of the ultimate cooling unit from the rest of the installation is a definite arrangement advantage.

From the standpoint of the airframe designer, the purpose of charge-air cooling is to increase the effectiveness of the airplane in accomplishing the operations for which it is designed. This is the ultimate yardstick which must be applied in answering three fundamental questions:

1. Whether charge-air cooling is to be employed
2. How the cooling is to be accomplished
3. To what extent the charge air is to be cooled.

It is immediately apparent that these are very complex questions. They involve not only the engine performance, but also the aerodynamic effect of the weight and of the internal and external drag of the coolers. They involve questions of maintenance, accessibility, and servicing. Often production, tooling availability of purchased equipment, and cost enter. Certainly, if time were taken to subject all of these factors to careful analysis in a particular case, the design would be obsolete before it flew. Much must be left to the individual judgment.

It is not the intention to attempt an original contribution to the problem, but to describe, and superficially, at least, to analyse current practice. The author does not propose to dismiss any of these problems on the basis of the qualitative discussion and brief quantitative data included, but rather merely to express what must sometimes seem to be the obstinate viewpoint of the designer.

When is Charge-Air Cooling Desirable?

The first problem which confronts the airframe designer is whether charge air cooling is to be employed. At first glance, this may seem an almost trivial question, and indeed in most cases the answer is obvious. For example, an installation in a fighter airplane designed for maximum power operation at 30,000 ft. may employ an engine which requires a pressure at the carburetor of 35 inches of mercury and, to avoid detonation, a temperature at that point of not more than 100 deg. F. Since the auxiliary-stage supercharger must raise the induction system pressure from about 9 inches of mercury to about 37 inches of mercury, the carburetor air temperature without intercooling would

(*Turn to page 278*)

* From a paper presented before the S.A.E., April, 1944.

REFERENCES

1. Colman, Philip, "Temperature Effects on Turbine Supercharger Installations," J. Ae. S., Vol. 10, No. 8, October, 1943.
2. Hives and Smith, "High Output Aircraft Engines," SAE Transactions, March, 1940.
3. Tsien, H. C., "Basic Problems in the Design of High Output Aircraft Engines," presented before Metropolitan Sections. SAE. December 1. 1938.

Review of Patents

By **A. HARRY CROWELL.** *Registered Patent Lawyer*

FOLLOWING are digests of some of the more interesting recent patents on aviation developments granted by the U. S. Patent Office. Mr. Crowell will gladly furnish readers with free information on approximate cost and procedure in applying for patents and trademark registration. Address inquiries to him, care AVIATION, 330 W. 42nd St., New York City (18). Printed copies of any of patents listed are obtainable at a cost of 10c. each, directly from U. S. Patent Office, Washington.

Retractable Undercarriage Development relates to systems where energy necessary for lowering landing gear is accumulated during immediate preceding lifting operation, especially where such energy accumulation is achieved, via hydropneumatic accumulator, through lifting jack. Called for is lowering operation effected in two periods, in such conditions that major part of driving energy available at accumulator is consumed in final period of lowering. And conversely, during lifting operation, major energy consumed in jack serves to raise pressure of accumulator, during first period, whereas during following period stress of jack is mainly used to overcome resistant stress of undercarriage. Patent particularly de-

(*Turn to page 277*)

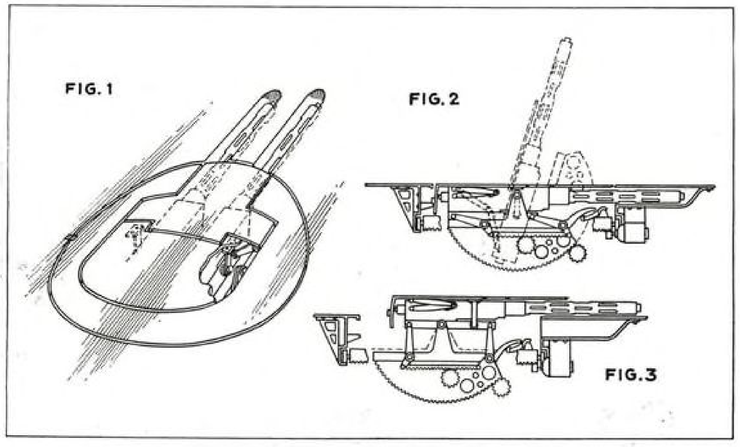

Aim in design of new remote-control gun turret is least drag in airstream while retaining high maneuverability of weapons and large range of fire. In design form depicted above, turret lies fully flush with surrounding skin of aircraft structure when not in use; in another form it lies flush except for portions of gun barrels. Both arrangements feature minimum protrusion of weapons during firing. Fig. 1 shows partial perspective view of flush turret, with guns retracted in recesses. Fig. 2 is side elevation, partly in section, with solid lines depicting weapons in retracted flush position and dotted lines showing them at extreme firing elevation. Fig. 3 illustrates how guns, when at extremity of firing arc, operate close to ship's body with least drag factor. Turret may be remotely controlled about several of its axes, affording optimum ranges of fire.—2,336,557, filed July 30, 1942, patented Dec. 14, 1943, H. H. McCallister, assignor to Glenn L. Martin Co.

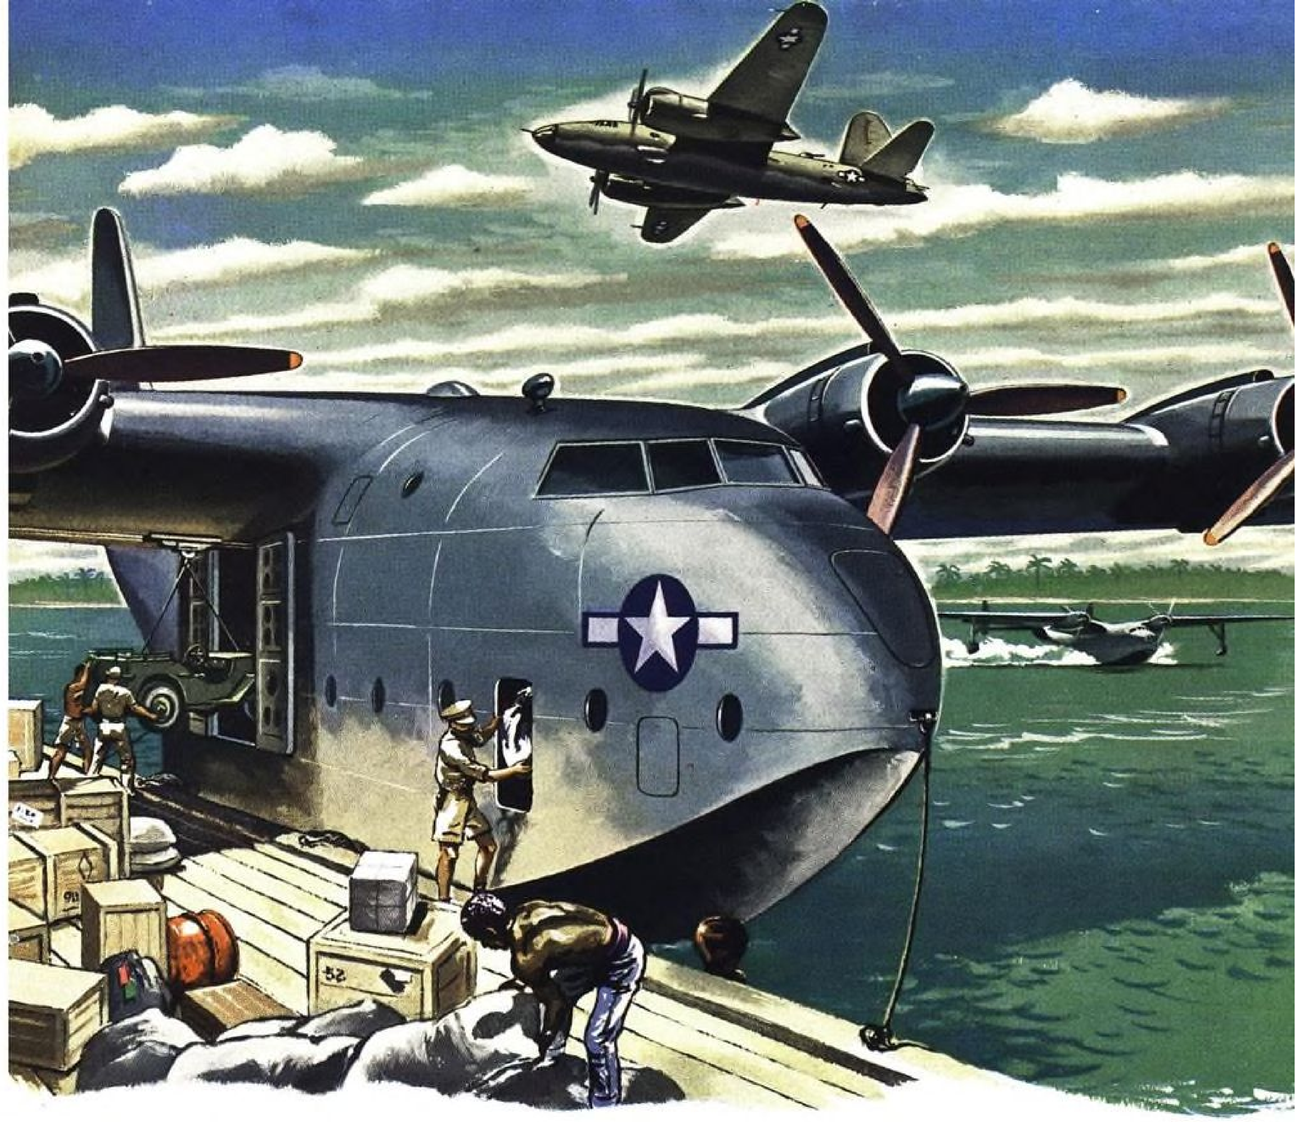

Greater warloads for the Mars

Two more passengers . . . another drum of 100 Octane . . . or nearly 1400 rounds of cal. 50 ammunition — this is the warload bonus provided by the 411 lb. lighter installation of Curtiss hollow steel blades on the Martin Mars.

This impressive reduction in complete installation weight is achieved notwithstanding the addition of the automatic propeller synchronizer and reverse thrust for greater surface maneuverability — both exclusive Curtiss features.

CURTISS ELECTRIC PROPELLERS

Curtiss-Wright Corporation, Propeller Division

8 MILES UP—THE *P-38* GETS FINGER-TIP CONTROL

No matter *how much speed* a fighter-pilot has *he must also have maneuverability*—be able to get in fast and get out quickly.

Now, even with the P-38's phenomenally increased speed, he can do just that. For Lockheed engineers, by installing aileron boosters actuated by the revolutionary Hycon "Stratopower" hydraulic pump, have given him "finger-tip control" over speed faster than sound. The application of these boosters, made practical for the first time, provides faster response of control surfaces, and as a result the Lockheed *Lightning* now outmaneuvers many single-engined ships—and fights higher than ever before in the thin air eight miles up.

To speed the day of Victory, we are using to the limit every facility at our command in the production of Hycon "Stratopower" pumps, and all of them are reserved for the planes of our armed forces.

And after the war—for peacetime

Because of its compactness and phenomenally high pressure, furnishing *variable volume up to 3000 pounds per square inch*, the Hycon "Stratopower" pump will do a great many hydraulic jobs *better*.

Today there are available other Hycon Pumps and Valves in the 3000-pound range for commercial applications to control or actuate machine tools, giant presses, dump truck lifts, materials-handling mechanisms and remote control circuits. They will operate brakes, clutches and steering devices of heavy vehicles; test high-pressure apparatus; and solve a wide variety of other hydraulic problems. For immediate delivery. Write for full information.

HYCON ★ ★ ★
REGISTERED TRADE MARK
Stratopower Pump

Manufactured only by The New York Air Brake Company

LET'S ALL BACK THE ATTACK—BUY MORE WAR BONDS

THE NEW YORK AIR BRAKE COMPANY

Hydraulic Division

420 LEXINGTON AVENUE, NEW YORK 17, N. Y.

SHEET NUMBER	D-20
CLASSIFICATION	Production
SUBCLASSIFICATION	Carbide-Tip Tools

Shank Size Calculations For Carbide-Tipped Tools

LOAD ON TOOL TIP is determined by *feed* and *depth* of cut. Experiments show speed does not greatly affect load. *Overhang* must be known in order to calculate bending moment. Applying these three factors (see accompanying nomograph) will give us the shank size. For example: Assuming a feed of .015 in. with a depth of 1/8 in., and an overhang of 1½ in., lay a straightedge between the ⅛ on the depth-of-cut scale and .015 on feed scale. Mark point "X" where straightedge crosses construction line. Join "X" to 1½ on tool-overhang scale and read shank size where line crosses shank-size scale. Here, size would be ¾ in. sq., ½ in. or ⅝ in. x 1 in., as most convenient.

(Courtesy of Carbide Fabricators Co.)

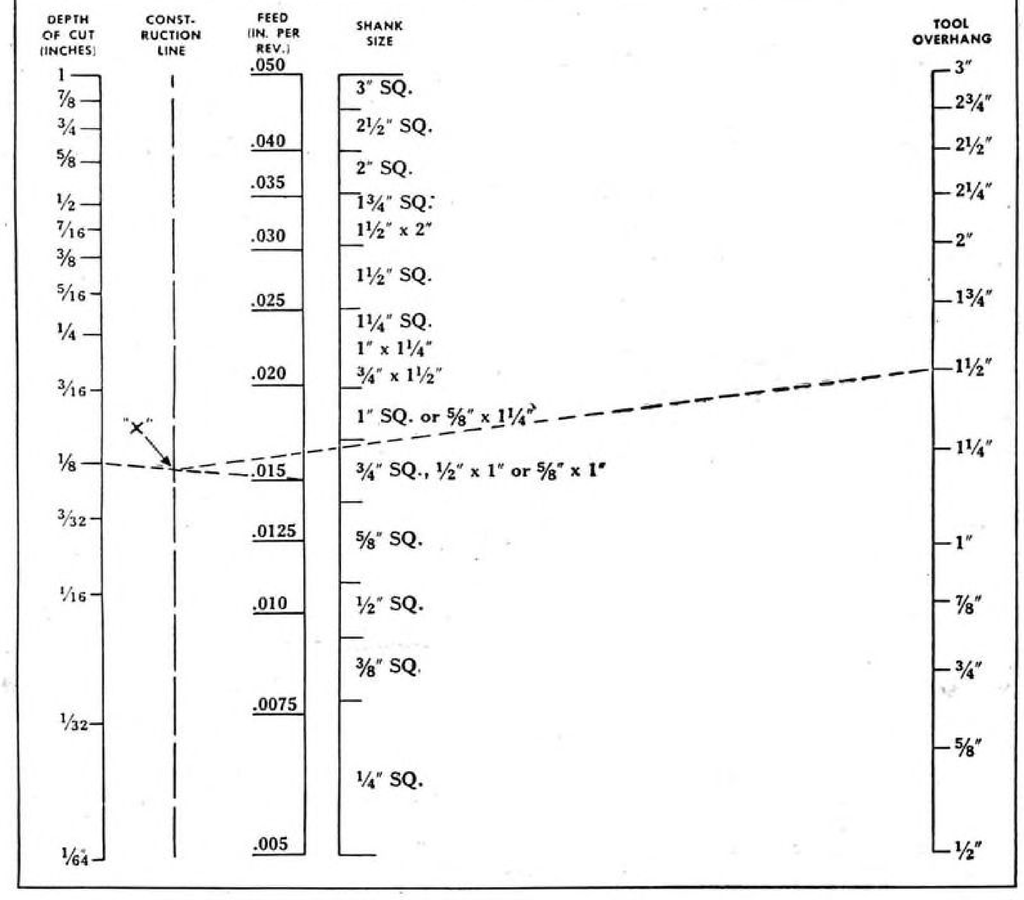

Redesigned!

PROVED THROUGH SERVICE, TRU-LOC STRAP FITTINGS HAVE BEEN REDESIGNED BY EXPERIENCE*

Streamlined may be the word to describe the advance made by redesigning the proved **TRU-LOC STRAP FITTING.** In fact, "cupping" the end that provides bearing for the Ball•Type Swaged Terminal and redesigning the opposite or "open" ends of the fitting have given streamlined appearance to the fitting. However, the advantages are much greater than improvement in appearance.

(1) Providing the ball-shaped cup has also eliminated the possibility of the fitting snagging any part of the plane that it might contact.

(2) This change also has added to the loading strength of the fitting.

(3) And the "cup" has provided such complete bearing for the Ball•Type Swaged Terminal that it acts as an effective brake on any tendency of the control cable to rotate.

TRU-LOC
BALL WITH SINGLE SHANK SWAGED TERMINAL

TRU-LOC
STRAP FITTING

The terminals made by combining **TRU-LOC** Ball and Single Shank Swaged Terminals and **TRU-LOC** Strap Fittings are precisely interchangeable with AN 667 and AN 668 Swaged Terminals.

You can use them as original equipment—saving time, labor and cost. For replacements, when needed, the services can install AN 667 and AN 668. Or they can use **TRU-LOC** Ball•Type Swaged Terminals with **TRU-LOC** Strap Fittings—whichever they may have.

Write our Detroit office for a copy of a new folder "PROVED IN SERVICE." It gives complete dimensional data.

AUTOMOTIVE AND AIRCRAFT DIVISION
6-235 General Motors Building, Detroit 2, Michigan
A Division of
AMERICAN CHAIN & CABLE COMPANY, INC.
BRIDGEPORT, CONNECTICUT

*PRECISELY INTERCHANGEABLE WITH **AN** SWAGED FITTINGS

ESSENTIAL PRODUCTS...TRU-LAY Aircraft, Automotive, and Industrial Controls, TRU-LOC Aircraft Terminals, AMERICAN CABLE Wire Rope, TRU-STOP Brakes, AMERICAN Chain, WEED Tire Chains, ACCO Malleable Castings, CAMPBELL Cutting Machines, FORD Hoists, Trolleys, HAZARD Wire Rope, MANLEY Auto Service Equipment, MARYLAND Bolts and Nuts, OWEN Springs, PAGE Fence, Shaped Wire, Welding Wire, READING-PRATT & CADY Valves, READING Steel Castings, WRIGHT Hoists, Cranes . . . *In Business for Your Safety*

SHEET NUMBER . . . . . D-20 (Cont'd)
CLASSIFICATION . . . . . Production
SUBCLASSIFICATION . . . . . Carbide-Tip Tools

Tip Size Calculations For Carbide-Tipped Tools

TO USE THIS NOMOGRAPH, again decide on *feed* and *depth* of cut. Locate feed on scale at left-hand side in inches per rev. and depth of cut in inches on right-hand scale. Line connecting these points will show tip thickness where it crosses angular line in center of diagram. Example shows $\frac{3}{8}$-in. depth of cut and .015-in. feed per rev. Line crosses center scale at $\frac{3}{8}$-in. thickness for point for regular cut and $\frac{1}{4}$-in. for interrupted cut.

(Courtesy of Carbide Fabricators Co.)

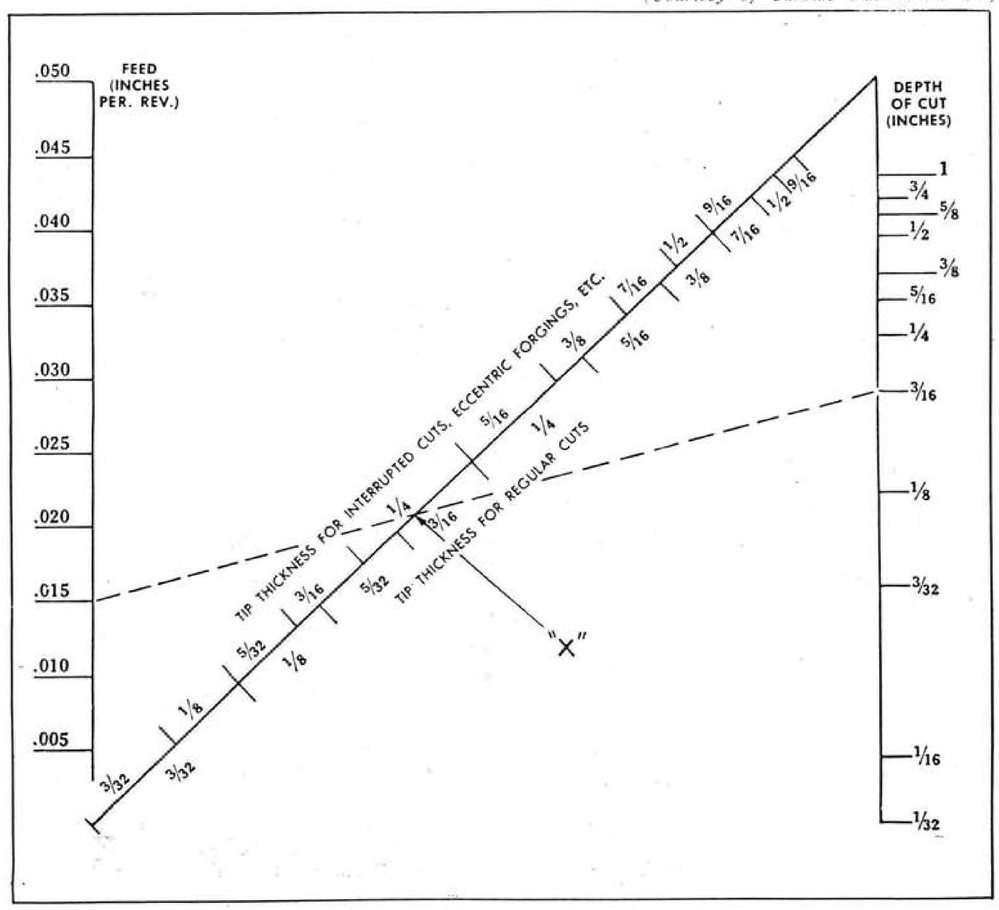

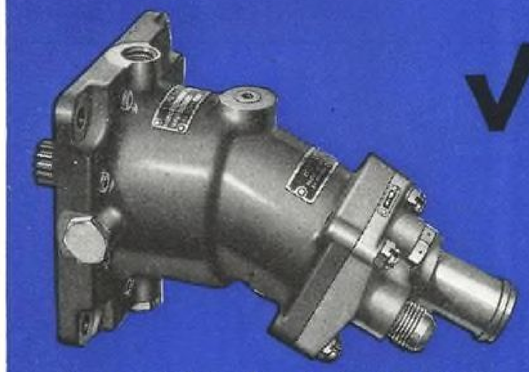

3000 psi Vickers piston type pump complies with Winterization Specifications of the Army Air Forces for operation between —65° F and 160° F.

VICKERS PUMP *Used in* 3000 psi HYDRAULIC SYSTEM

ON DOUGLAS SKYMASTER (C-54)

It is significant that the 3000 psi hydraulic system on the Douglas (C-54) Skymaster uses the Vickers Axial Piston Type Constant Delivery Pump shown above. This pump was developed (from 2000 psi units of similar design that had been in service since 1935) in cooperation with Douglas when they were developing the 3000-lb pressure hydraulic system for this airplane.

The volumetric efficiency and the overall efficiency of this pump are very high . . . as indicated by the performance curves below. Note that there is no appreciable increase in slippage as the pressure is increased. The maximum recommended continuous operating pressure is 3000 psi and the maximum recommended speed is 3750 rpm at which the horsepower output is 13.3 hp. The weight is only 6.8 lb, providing the exceptionally low weight/horsepower ratio of only 0.51 lb per hp. Pumps of this series having smaller capacities are also available.

VICKERS
Incorporated
1462 OAKMAN BLVD.
DETROIT 32, MICHIGAN

Engineers and Builders
of Oil Hydraulic Equipment
Since 1921

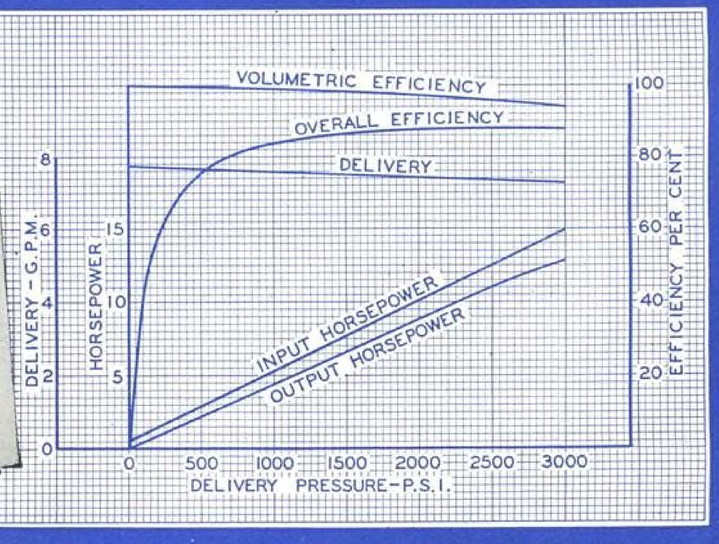

Curves are for Vickers Aircraft Piston Type Constant Delivery Pumps Model PF-3911 Series at 3600 rpm using approved AN aircraft type hydraulic fluid

Engine mount of Republic P-47 Thunderbolt is of welded steel tube construction, with five points of attachment on the 2,000-hp. Pratt & Whitney R-2800 engine and four points on fuselage. Oil radiator bracket structure can be seen at A.

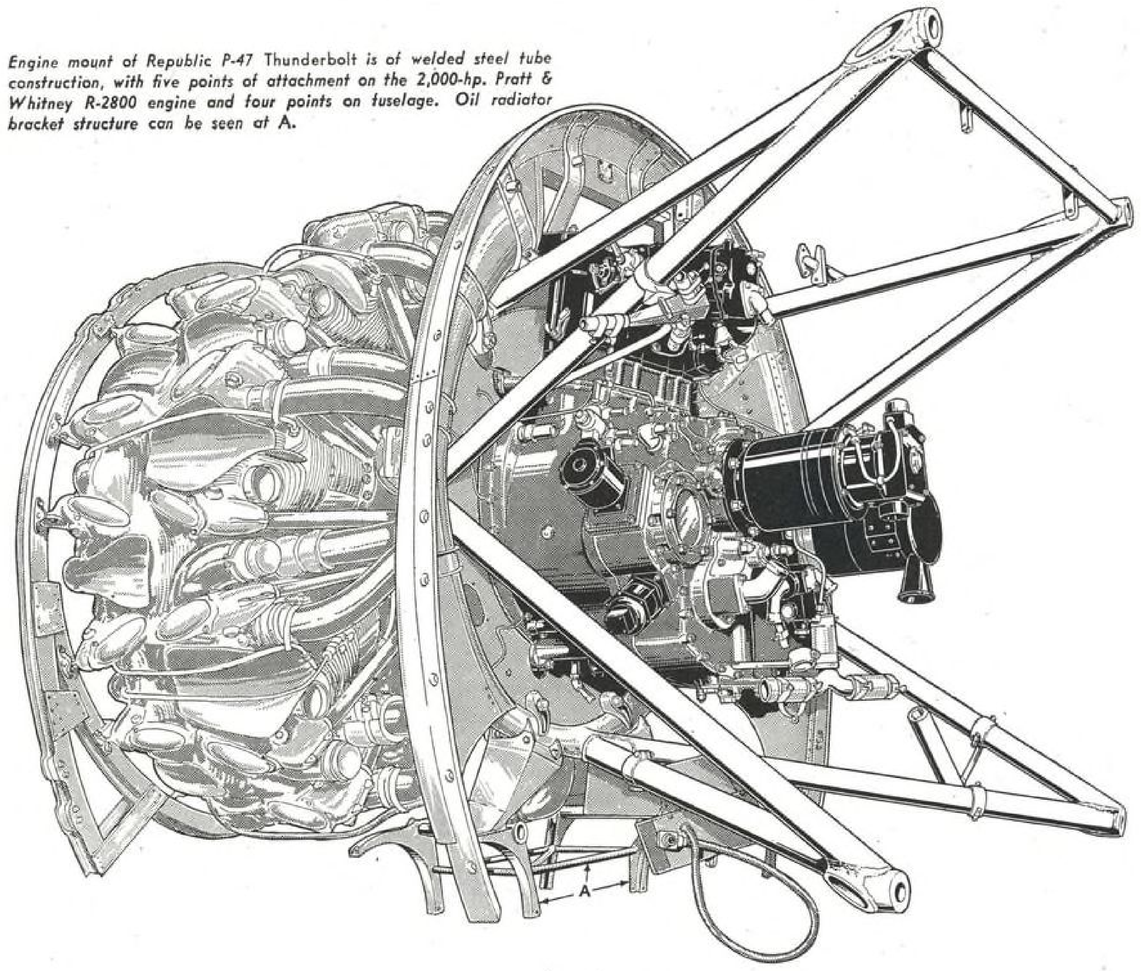

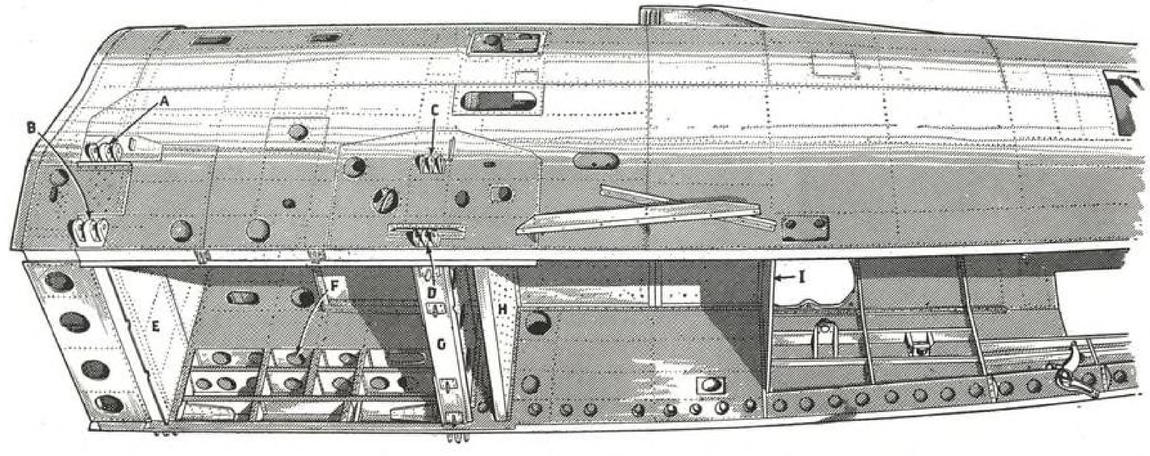

Main portion of P-47 fuselage is designed for construction in upper and lower sections. Seen from below, this view of upper portion shows four wing fittings A, B, C, and D. Firewall is attached to front spar tie-through E. Note built-up type structure at F forming fuselage side. G is rear-spar tie-through member, and fuel cell is located between bulkheads H and I.

Installed in Standard AN Housing.

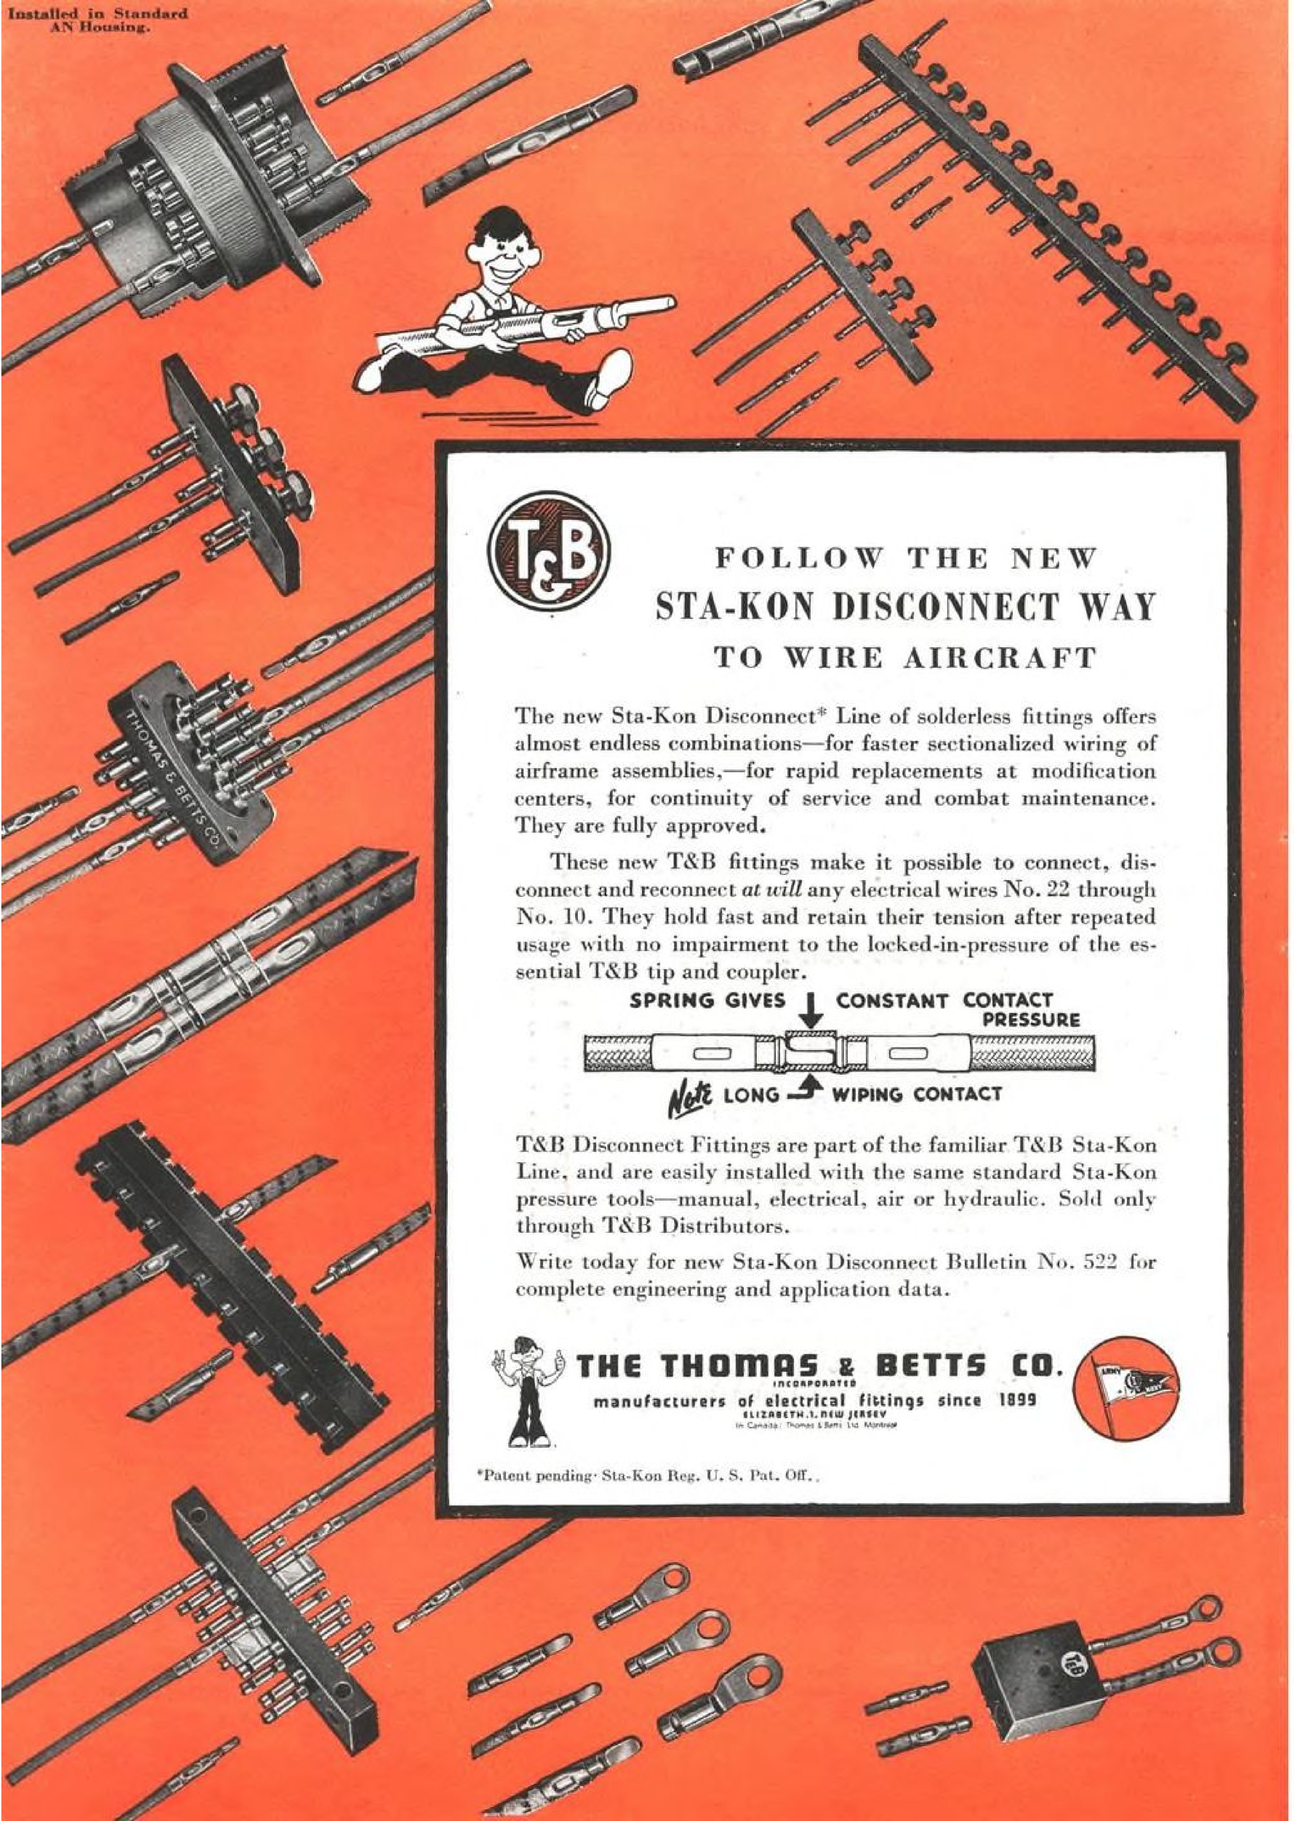

T&B

FOLLOW THE NEW
STA-KON DISCONNECT WAY
TO WIRE AIRCRAFT

The new Sta-Kon Disconnect* Line of solderless fittings offers almost endless combinations—for faster sectionalized wiring of airframe assemblies,—for rapid replacements at modification centers, for continuity of service and combat maintenance. They are fully approved.

These new T&B fittings make it possible to connect, disconnect and reconnect *at will* any electrical wires No. 22 through No. 10. They hold fast and retain their tension after repeated usage with no impairment to the locked-in-pressure of the essential T&B tip and coupler.

T&B Disconnect Fittings are part of the familiar T&B Sta-Kon Line, and are easily installed with the same standard Sta-Kon pressure tools—manual, electrical, air or hydraulic. Sold only through T&B Distributors.

Write today for new Sta-Kon Disconnect Bulletin No. 522 for complete engineering and application data.

THE THOMAS & BETTS CO.
INCORPORATED
manufacturers of electrical fittings since 1899
ELIZABETH, N. NEW JERSEY
In Canada: Thomas & Betts Ltd. Montreal

*Patent pending· Sta-Kon Reg. U. S. Pat. Off..

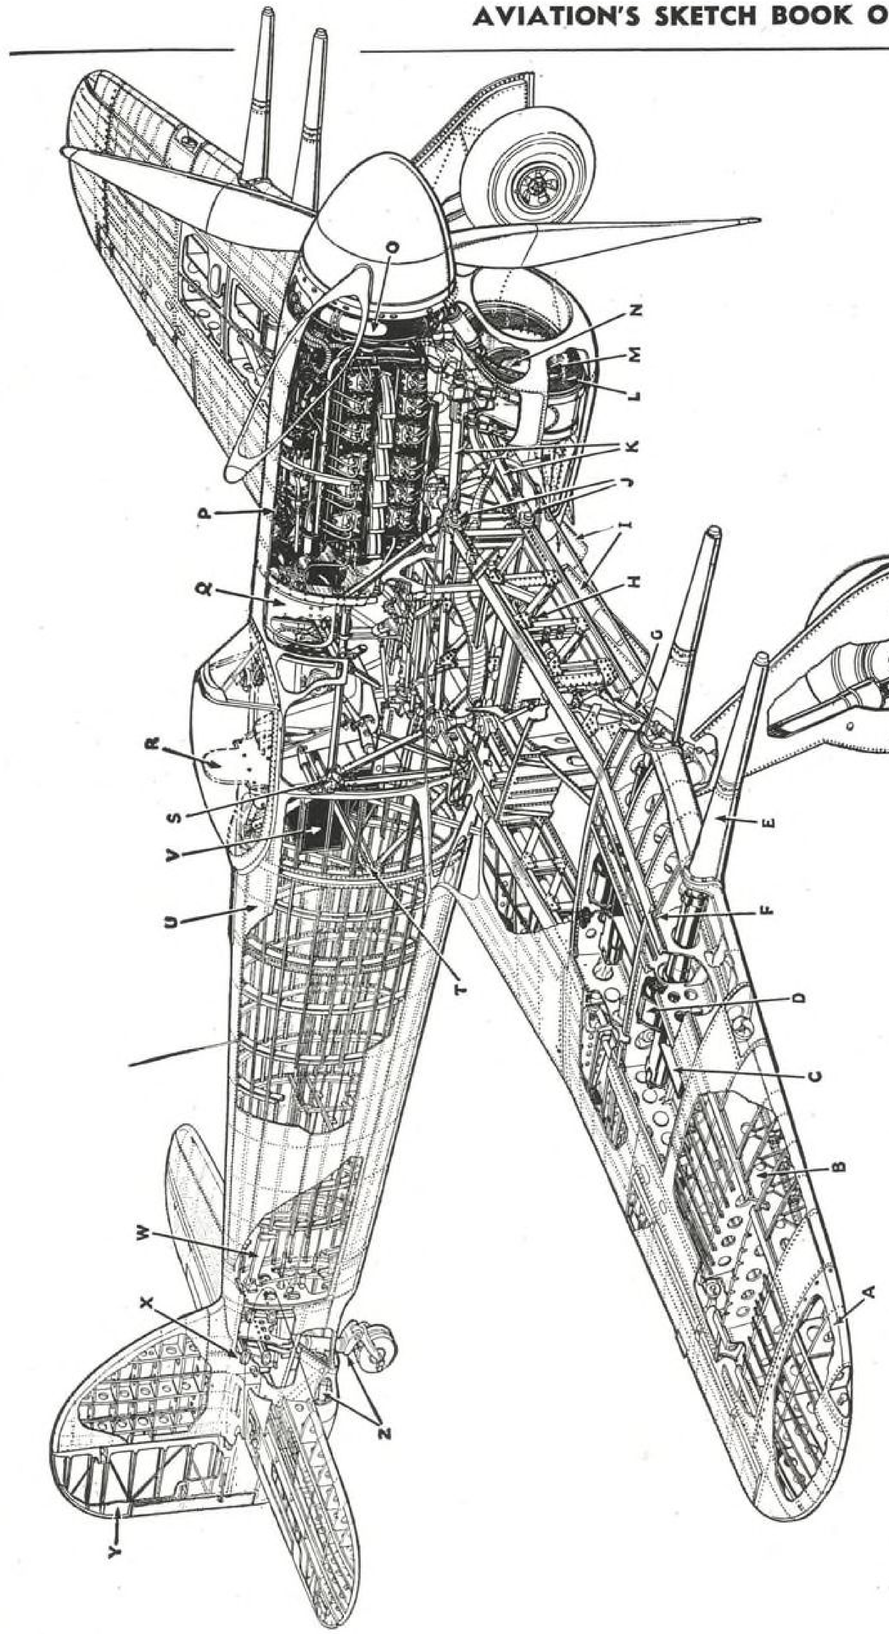

Cut-Away of Hawker Typhoon Re-Drawn From "The Aeroplane"

AEROQUIP SELF SEALING COUPLINGS AND HOSE LINES
WITH DETACHABLE FITTINGS ARE STANDARD
ON ALL ARMY AND NAVY AIRCRAFT.

AEROQUIP CORPORATION
JACKSON, MICHIGAN, U. S. A.

303 WAREHAM BLDG., HAGERSTOWN, MD. - 1709 W. 8th., LOS ANGELES - PRENCO—72 STAFFORD ST., TORONTO, ONT.
PERMANENT LICENSEE: WAGNER ELECTRIC CORPORATION, 6400 PLYMOUTH AVENUE, ST. LOUIS 14, MISSOURI

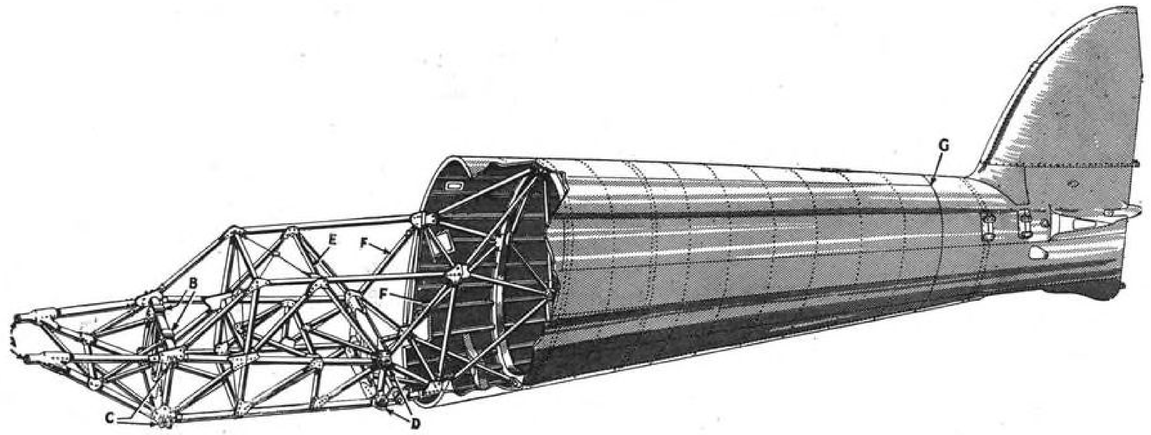

Fuselage of Hawker Typhoon I-B *is of combination girder and monocoque construction. Oil and coolant radiators and supercharger air intakes attach to forepart of girder structure at* A, *just forward of fore engine mount attaching point. Rear engine attaching points* B *are on cross member between front spar attaching points* C. *Rear spar attaching points are at* D. *Instrument panel is mounted atop cross member* E, *and pilot's seat is attached between members* F. *This type construction is used not only to absorb heavy stresses incident to a heavy plane but also to permit easier access for construction and maintenance. Aft portion of fuselage is built in two sections, joined together at* G, *with vertical fin built as integral part of rear portion. (Re-drawn courtesy of* Flight.)

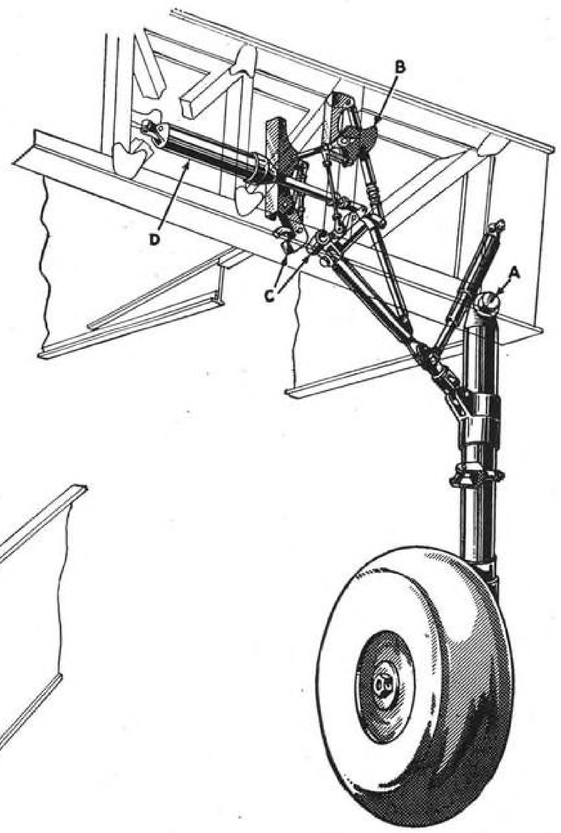

Typhoon retractable landing gear pivots at A, *at outer end of truss-type front spar. Latching gear is at* B, *with lock shown at* C. *Hydraulic jack is shown at* D. *Wheel swings in and up into wing, as shown in phantom view below, with emergency release pedal at* E. *(Both sketches re-drawn from* Flight.)

Enclosed Design

- PROTECTS LATHE OPERATOR
- KEEPS VITAL PARTS CLEAN
- MAKES BELT CHANGING EASY

The operator does not catch fingers or clothing in moving belts or gears on a Logan Lathe. The Cone Pulley Guard in its normal "down" position completely covers the countershaft, headstock and back gear assemblies. The motor-drive belt and change gear assemblies are completely enclosed. All guards are quickly and easily opened giving complete accessibility. Not only is the operator protected, but vital parts of the lathe are shielded from dust and dirt accumulations.

Raised to its "up" position, the Cone Pulley Guard automatically moves the countershaft toward the headstock, releases flat belt tension, and makes changing the belt position easy and safe...an exclusive, patented Logan feature. The flat belt tension is easily and quickly regulated by a simple screw adjustment. Full information on all the advanced design features of all models of Logan Lathes will gladly be sent you on request. Write today for your copy of the latest Logan Lathe catalogs.

OPERATOR PROTECTED... VITAL PARTS KEPT CLEAN

Countershaft, back gears, headstock, change gears and motor-drive belt are all completely enclosed, yet quickly accessible.

BELT CHANGES EASY AND SAFE

Raising the Cone Pulley Guard to "Up" position automatically moves the countershaft toward the headstock, releasing tension on the flat belt.

BRIEF SPECIFICATIONS

Swing over bed, 10½" . . . bed length, 43⅛" . . . spindle hole, $\frac{25}{32}$" . . . capacity, ⅝" with push type collet . . . 6-position automatic indexing turret . . . stroke of turret, 4¼" . . . 12 spindle speeds from 30 to 1450 r.p.m. . . . all moving parts protected by ball bearings or self lubricating bronze bearings.

No. 850 MANUFACTURING TURRET LATHE

Logan

LOGAN ENGINEERING CO.

CHICAGO 30, ILLINOIS

*One of a series describing the finer features of Logan Lathes . . . Look for the next of the series

The AVIATION NEWS

BLAINE STUBBLEFIELD, Washington HERB POWELL, New York

Launch Initial Postwar-Air-Policy Parleys; Peacetime Private-Plane Market Gaged

See few Army craft available or suitable . . . Johnston weighs market possibilities . . . SAE New York meeting . . . Chamber and NAA programs . . . JLC drafts air principles . . . CAB questions insurance rates.

Chief interest considered today by the airline industry is its place in the postwar foreign-service field. Will there be an open competition system, or will operators participate in a semi-official organization under just one management? Might there be a worldwide air council with, more or less, control over routes, schedules, rates? Will there be an international government subsidy race, or will the airlines pay their way on an economical basis? Will there be freedom of entry into various countries, or will landing rights be negotiated bilaterally? These and scores of other questions must be answered eventually by a United Nations Air Conference.

First steps toward such a conference have been taken. A U. S. air mission, headed by E. P. Warner, CAB vice-chairman, and Adolf Berle, chairman of the Special International Aviation Committee, has had exploratory talks in England and Canada. At this writing, another delegation, including L. Welch Pogue, CAB chairman, W. A. M. Burden, assistant Secretary of Commerce, and Mr. Berle, and headed by former Ambassador to Japan Grew, now special assistant to Secretary of State, Hull, was preparing for discussions with the Russians in Washington.

These meetings will lead to more conferences here and abroad during the summer. Many of the United Nations will participate, including China, Australia, and Canada. The secret report, written months ago by the special committee, formerly called the Interdepartmental Committee on International Aviation, has not been made public, but it becomes less important as new names and new information appear in the picture. Final word in this vital development may belong to the United States Senate, which has power of ratification of treaties. Senate foreign relations and commerce committees have been gathering data.

See Few Army Airplanes For Peacetime Flyers

How many Army artillery-liaison and Air Force training planes suitable for sale to private flyers will be for sale when the war ends is a matter of interested speculation by military and aircraft trade officials. They agree that the number will be small, perhaps a few hundred, not near enough to meet the initial postwar demand.

The liaison planes, most desirable for personal use, are largely overseas and many of them will not be returned. Air Force training planes are nearly all of the basic and advance types whose comparatively high horsepower takes more fuel than most private owners could afford.

Johnston Weighs Postwar Market Possibilities

That utility of light planes will remain limited for a while in the postwar period, and that total sales will not approach 20,000 per year for at least five years, even if there is general prosperity, is the opinion expressed by S. Paul Johnston, former editor of AVIATION and now Curtiss-Wright representative in Washington, in a book titled, *Wings After War*. Johnston believes it will take years to perfect the helicopter. Roadable light planes can be flown, but here high weight and cost will be hard problems. All-wing designs will not be practical in small sizes, that is, not much less than 300,000 lb. He does not feel that cargo gliders will be successful. His rough guess is that in new peace AAF will maintain about 18,000 planes and Navy about 10,000 in peacetime.

SAE New York Meeting Tackles Current Problems

SAE's recent National Aeronautical Meeting in New York City stressed problems which confront the engineer and manufacturer in today's war work.

The Wright Brothers Medal was presented at the dinner to C. E. Pappas, Republic Aviation Corp., for his paper "Determination of Fuselage Moments." SAE Pres. W. S. James spoke on "The Usefulness of SAE to the Aviation Industry," and Maj.-Gen. Frank O'D. Hunter, commanding general, 1st Air Force, told about "The Army Air Forces in the Present War."

During the three days, the following papers were presented:

"Measurement and Prediction of Aircraft Vibration," E. Forest Critchlow, CAA; "Engine Cooling Fan Theory & Practice," Kenneth Campbell, Wright Aero; "Aircraft Engines in Tanks," G. Waine Thomas, Continental Motors; "Trends in Ice Prevention," Lewis A. Robert, NACA; "Pneumatic De-Icer," J. E. Gulick, B. F. Goodrich; "Cold-Weather Operation of Aircraft," G. A. Bleyle, Wright Aero; "Propeller & Gear Ratio Requirements for Cruising Aircraft," R. S. Schairer, Douglas Aircraft; "Aircraft Maintenance in Combat Areas," Lt.-Comdr. R. E. White, USNR. (paper read by Lt.-Comdr. F. E. Johnson, USNR); "Fundamentals of Aircraft Design, A. L. Klein, Douglas Aircraft; "Basic Principles of Power Boost Flight Controls," E. G. Riley, Glenn L. Martin; "Stresses in Disk Wheels," William Knight, Curtiss-Wright; "Piston Ring Development for V-770 Engine," C. H. Van Hartesveldt and M. Epps, Ranger Aircraft Engines;

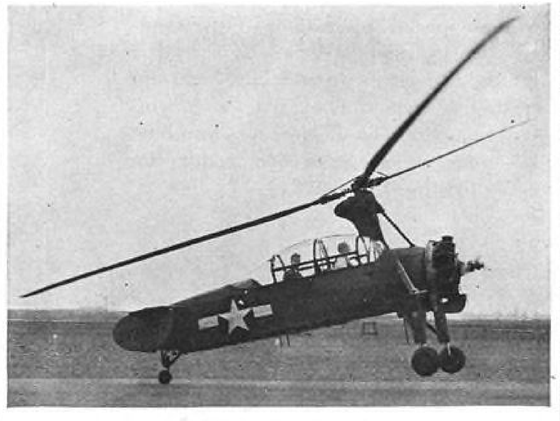

NEW ROTARY WING CRAFT

Kellett YO-60 autogiro, latest of line built for AAF, has added visibility made possible by bubble-type canopy and openings in floor, enhancing utility for reconnaissance, artillery spotting, and other observation work. Craft is powered by 300-hp. Jacobs engine.

Coming Up

May 1–3: Third Wartime Aviation Planning Conference. The A. & M. College of Texas, College Station, Tex. Also Aviation Writers Assn. annual convention.

May 18–20: Spring Meeting, Society for Experimental Stress Analysis, Hotel Statler, Boston, Mass.

October 5–7: Society of Automotive Engineers National Aircraft Engineering & Production Meeting. Engineering Display. Hotel Biltmore, Los Angeles, Calif.

December 4–6: Society of Automotive Engineers National Air Cargo Meeting. Hotel Knickerbocker, Chicago, Ill.

January 8–12, 1945: Society of Automotive Engineers Annual Meeting & Engineering Display, Book-Cadillac, Detroit, Mich.

INSPECTION PROBLEMS?

Here's how Controlled Lighting saves time on tough inspection jobs

TO look inside a 75 mm. shell was difficult . . . until G-E lighting engineers helped work out a faster, more accurate inspection method. A standard G-E reflector lamp with a mirror arrangement "turns shells inside out"—makes sure there's no grease, dirt or pitting. It's a typical example of inspection methods that use controlled lighting. . . . and it's another instance where G-E engineers have helped to gain faster, better inspection methods.

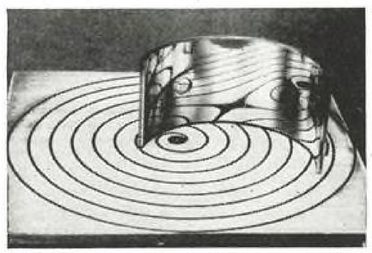

1 Brightness contrast patterns are useful for the inspection of chatter in polished metallic surfaces. Reflections reveal defects of unevenness and other irregularities.

2 Luminous panels permit accurate checking of cloth seams, weave and finish. Shown above, this type of inspection permits accurate examination of all seams in pilot parachute manufacture.

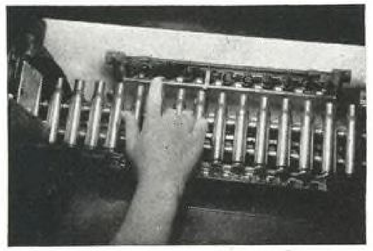

3 An inspection unit developed specifically for cartridge case inspection. It makes use of reflected light from mirrors, showing the interior and primer cup end of the cases.

In these special applications—or in standard lighting installations—be sure you get the utmost in dependability and operating efficiency. Look for the famous G-E monogram on all the bulbs you buy. It's your assurance of best results for every lighting purpose.

Send For New G-E Booklet That Gives The Facts On Lighting For Inspection. Write to General Electric Co., Dept. AV-5, Nela Park, Cleveland, O.

"TO MAKE LAMPS STAY BRIGHTER LONGER"
The Creed of G-E LAMP RESEARCH

LET'S ALL BACK THE ATTACK—BUY ANOTHER BOND THIS MONTH!

G-E MAZDA LAMPS

GENERAL ELECTRIC

Hear the General Electric radio programs: "The G-E All-Girl Orchestra" Sunday 10 p. m. EWT, NBC; "The World Today" news, every weekday, 6:45 p. m. EWT, CBS.

"Aerodynamics of Cooling Ducts," K. F. Rubert, NACA.; "Relation of Intake Charge Cooling to Engine Performance," E. A. Droegmueller and D. S. Hersey, P & W; and W. A. Kuhrt, Research, United Aircraft; "The Intercooling Problem in Airplane Design," H. B. Dickinson, Lockheed; "Particulars of the German V.D.M. Electric Propeller," John D. Waugh, Lockheed Overseas; "Propeller Efficiency of a Light Airplane," K. D. Wood, Purdue Univ. and W. R. Woodward, Bell Aircraft; "Engine Production as Viewed by an Automobile Manufacturer," Col. J. G. Vincent, Packard Motor Car; "Investigation of Chafing of Engine Parts," H. C. Gray and R. W. Jenny, Wright Aeronautical; "Hydraulic Engine Power Controls," Howard Alexanderson, Eclipse-Pioneer; "Pre-Rotation of Landing Gear Wheels," H. F. Schippel, B. F. Goodrich; "Design for Production of Sheet Metal Aircraft Parts," F. M. Mallet, Curtiss-Wright; and "Analysis of Airframe Production Methods in Aircraft and Automobile Industries," Thomas N. Kelly, Consolidated Vultee.

Highlights of Aero Chamber And NAA Programs

Construction of thousands of landing areas throughout the country, less bothersome regulation on personal flying, and practical education of the public in the utility of light airplanes are major policies of the Personal Aircraft Committee of the Aero Chamber of Commerce. Small cities and towns are asked to build modest airports for convenience, not expensive ones for showoff. The small-field program, if started now, will advance airmindedness and the sale of personal planes, the committee believes. Many homecoming service airmen and women would like to go into the airfield and service business. The committee also is urging the CAB to modify the difficulties of getting airplane type certificates.

The NAA has established a postwar policy intended to aid the increase of private flying by supporting a suitable airport program, by encouraging the study of aviation in schools, and working with manufacturers for the design of better airplanes. It advocates private ownership of airlines as opposed to any government ownership that might be proposed, also seeks the establishment of a Department of National Defense, combining Army, Navy, and Air Forces. NAA will work with any and all organizations having these objectives.

JLC Drafts Air Principles

The principles which eight American aviation groups—comprising the Civil Aviation Joint Legislative Committee—believe should be incorporated in legislation now under consideration by Congress have been drafted and referred to the Aeronautical Law Committee of the American Bar Association.

Covered are provisions dealing with the questions of airports, air contractors, government training, powers of the administrator, taxation, safety, and insurance. The eight groups: Aero Chamber of Commerce, American Assn. of Airport Executives, Aviation Distributors & Manufacturers Assn., Early Birds, insurance groups, National Aeronautics Assn., National Assn. of State Aviation Officials, and National Aviation Trades Assn.

CAB Questions Insurance Rates

A study of aviation insurance and re-insurance, published by the CAB, suggests that the rates are too high and that important economic and military information is being piped abroad. It probably will result in reduction of rates by the three groups dominant in the field.

Nobody seems to want passage of the Lea bill, which would authorize the CAB to provide aviation insurance. Chances are that companies now serving the industry, or others, will find a way to handle re-insurance risk pooling in this country rather than dealing it out to British brokers.

Produces Steel-Strong Alloy

Word comes from the Reynolds Metal Co. regarding its development of R-301, a new aluminum alloy stated to be as tough as structural steel but so light that its use in airplane will reduce weights by thousands of pounds, enabling carriage of more bombs and guns or design for increased speeds.

It has been reported that R-301 may even be employed in armor plate, Pres. R. S. Reynolds declaring that it is more effective in deflecting bullets than is steel plate. Thus far, the new alloy is being used solely for war purposes, but peacetime applications of it are being ranged.

Notes on Training Cut-Back

Civilian school aid to the Air Forces is being rapidly cut down because air crew manpower in training process is almost large enough to finish the war. CAA's War Training Service has stopped its Navy cadet and Enlisted Reserve instructor courses, and the 10-hr. air crew course is being tapered off. Eleven of the Army's primary schools, contracted directly with members of the Aeronautical Training Society, are being closed this summer. Six had already closed. Unless some provision is made for their continuance, all 64 will be shut down before the end of the war. AAF no longer gives primary training within its own military schools.

WASP Need Investigated

The Civil Service Committee of the House was, at this writing, inquiring into the need for the Women's Airforce Service Pilots (WASP). A bill had been introduced providing for the transfer of the WASPs from civilian status to eligibility for appointment to the AAF. Gen. H. H. Arnold, AAF chief, testified in favor.

Numerous complaints charged that hundreds of experienced male pilots are available for flying now done by the women, further contended that more men will be unemployed as WTS and Army contract schools are progressively closed. Navy and commercial airlines have refused to employ female pilots.

Finish 26 Flight Strips

Twenty-six flight strips have been completed by the Bureau of Public Roads for the AAF at various places throughout the country, with an appropriation of $10,000,000. Thomas H. MacDonald, Commissioner of Public Roads, recommends further study and continuance of the program for personal flying. A controversy is developing on the question whether single runways are practical. Most officials of CAA are favoring instead numerous small airports close to towns, country clubs, sports centers, and factories—places where people gather in large numbers.

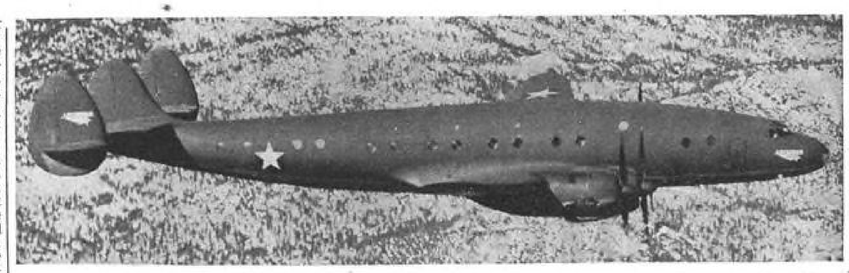

"CONNIE" SETS RECORD

Flying TWA colors, Lockheed "Constellation" set speed record of better than 355 mph. in non-stop jump from Burbank to Washington's National Airport, actual coast-to-coast time being 6 hr. 55 min. Piloted by Howard Hughes and Jack Frye, TWA president, crew included Howard Bolton, navigator; R. I. Proctor, flight engineer; and C. E. Glover, radio operator. Craft is powered by four 2,200-hp. Wright "Cyclone 18's." Its Army designation is C-69. Sleeping accommodations for 38 are called for in airline version.

OBITUARY

Col. Lucius B. Manning died last month in a plane crash in Alabama. He was formerly a vice-president of American Airlines and a director of Consolidated Aircraft. An Airman in World War I, he was identified in 1932 with Cord Corp. airplane interests, later became head of American Airways, then a director of The Aviation Corp. Among other posts he held was the presidency of the Stinson Aircraft Co.

Inglis M. Uppercu recently died at his home in New York City. In World War I days, he operated a passenger airline connecting Miami, Nassau, Cuba, and Key West. He was, through the years, president of several companies which made planes at Keyport, N. J., one of these organizations being the Aeromarine Klemm Corp., manufacturer of light planes following a German design. Uppercu also organized the Uppercu-Burnelli Aircraft Corp. to promote the airfoil-body type craft of Vincent Burnelli.

★ SPOT CHECKING ★

Continental Air Lines' Denver modification center handled over 1,600 planes between July 1942 and Dec. 1943. Bulk of craft were Boeing B-17's, but center also handled two special jobs; one was for British, other was on North American P-51's.

Aero Chamber survey shows 27.4 percent of aircraft engine engineers are under 26 yr. of age, exclusive of 4-F's. Total of 68.6 percent of the engineers are subject to draft.

Riddle Aeronautical Institute's Carlstrom field gave primary flight training to 5,251 cadets during past three years, with flying total of 402,774 hr. and 36,249,660 mi.

A $2,000,000 AAF storage depot, scheduled for completion in December, is under construction on 185-acre site of old San Francisco Airdrome in Ala-

Checks INTERNAL AND EXTERNAL DIMENSIONS

To MILLIONTHS of an Inch

UNUSUAL FEATURES FACILITATE FAST AND ACCURATE OPERATION

Model N-4 Internal-External Measuring Instrument is an entirely new Sheffield development for Toolroom and Gage Laboratory use in checking master and working gages, setting snap gages, etc.

- Checks internal dias. of ¼" to 12".
- Checks 3" max. depth of hole, 1 side.
- Checks external dimensions up to 12".
- Gaging arms elevated electrically.
- Indicator automatically shows height of gaging arms.
- Signal lights facilitate setup.
- Positive electrical magnification of 2500 to 1 with Electrigage.
- Linear scale of .012" range graduated in 50 millionths.

WRITE FOR ENGINEERING DATA AND PRICE

ARMY E NAVY — SHEFFIELD MASTER CRAFTSMEN

THE SHEFFIELD CORPORATION

Dayton 1, Ohio, U.S.A.

MACHINE TOOLS • GAGES • MEASURING INSTRUMENTS • CONTRACT SERVICES

meda, Cal. Depot will provide five warehouses to store new supplies and used material from overseas awaiting repair.

North American's P-51 "Mustang" is officially credited by War Department with being world's fastest airplane, capable of level flight "in excess of 425 mph." with tactical radius "well over 500 mi." British had previously advertised de-Havilland "Mosquito" as being "world's fastest operational" craft.

SEC report shows aircraft industry's 1942 profits after taxes were 2.6 percent—compared with 3.5 for rubber, 3.6 for rail equipment, 4.1 for electrical equipment, 5.3 for industrial machinery, and 6.1 for agricultural machinery.

Newest speed record from Hawaii to American mainland is 8 hr. 55 min. It was set by a Consairways "Liberator" transport completing its 55th round trip to Australia. Average speed for 2,400-mi. hop was 269 mph.

Sales of excess inventories by five Eastern aircraft producers topped $1,320,000 in 748 deals in first of two weeks' disposal program.

CAA engineers are reported to have designed a $700 plane—including engine—which could be built by high school students. Model, however, has not yet been certificated by CAB.

Franklin Institute's John Price Wetherill Medal has been awarded this year to the late Richard C. duPont. The posthumous honor cited "his development of a successful and practical 'on-the-wing' airmail and glider pickup appartus."

Eight squadrons of PB4Y's, Navy adaptation of *Liberator* for over-water patrol, have been activated. Deliveries of Navy's sub-socking model of North American B-25 *Mitchell*, are increasing.

A Boeing report on the use of cameras shows that clouds form as high as 35,000 ft., a fact some scientists have not realized. Tests have shown temperatures of 106 deg. below zero at 40,000 ft. B-17's have been going to 42,000 ft., which is said to be a record for their weight and power.

New general consulting research, and survey service for the aviation industry was recently formed under the name Aviation Associates. Director is V. C. Rasmussen, who has had 10 yr. experience in airline traffic, in operations, publicity, financing, and insurance. D. H. Colcord is in charge of postwar sales engineering, and consultants are V. J. Sweeney and G. R. Higgins. Main office is at 664 N. Michigan Ave., Chicago (11), Ill.

Representatives of five Eastern aircraft firms recently organized the National Society of Plastic Tooling. President is Delmar Anderson, superintendent, production planning and tool design for the Buffalo plants of Curtiss-Wright. Besides Curtiss-Wright, other companies partaking are Bell, Consolidated Vultee (Allentown, Pa.), Grumman, and Glenn L. Martin. Information regarding the new group, which plans to expand west, will be sent to interested parties, who should address Harry W. Tompkins, Public & Internal Relations, Buffalo (5), N. Y.

Today, preservation and packaging of aircraft spare parts is pretty well standardized. If part is of non-corrosive material, it is packaged in specially developed waterproof outer carton. Parts that have machined ferrous surfaces are cleaned and treated with special compounds, then wrapped and packed in water-resistant shipping containers. Some containers can withstand several days total immersion. Sometimes in beaching operations supplies have to be dumped in water, and jungle conditions are often equivalent to immersion. Credited for development: Joint Army & Navy Working Committee, which was assisted by Aero Chamber's technical department.

A multi-purpose quilt has been developed by Wright Field for safety of flyers. Made of water-repellent material and chicken feathers and weighing only 2-4/5 lb., it gives warmth and has enough buoyancy to sustain a man in water indefinitely. Moreover, tie-straps enable it to be set up as pup tent or hammock, and it makes cozy sleeping bag, a slit in the center further enabling wearer to use it poncho style. Olive drab on one side, brilliant yellow on other, it can be used in signaling. The waterproof, non-toxic carrying case can be used for storing water.

Over 50 AAF bombers have returned to their bases on electronic autopilots though control cables had been shot away, according to Minneapolis-Honeywell Regulator Co., co-makers of the unit.

CAA researchers report that the flying illness hyperventilation—commonly called 'huff and puff'—can be easily cured despite its long name. The resulting dizziness, tingling of fingers and toes, or feeling of suffocation may be voluntarily curbed by one's slowing breathing or inhaling and exhaling several times into a paper sack. Hyperventilation is caused by overly-fast breathing, which supplies the lungs with too much oxygen, displacing needed carbon dioxide.

Three aircraft units—Convair of San Diego and two Fairchild Hagerstown plants—are among winners of Office of Civilian Defense's National Security Awards for superior achievement in plant security against explosions, fires, and other hazards.

TRY TO FIND ONE, BUB

Nazi fighter pilot demonstrates to Jerry novices the method of trying to find blind spot on Consolidated B-24 "Liberator." Wire frames on model held aloft show fields of fire covered by "Lib's" 50-cal. machine guns. Latest models would require even more wire frames. (International News photo from neutral sources.)

THE WASHINGTON WINDSOCK

By BLAINE STUBBLEFIELD

What air attack has done to enemy ships, factories, surface transportation, oil fields, water supplies, and other installations can be measured more or less accurately. But how much more strength and damage the enemy might have turned upon us except for such Allied air attack cannot be precisely known until the information comes out of conquered Germany and Japan.

Mention of the B-26 at the front occurs with continued frequency in the press. A checkup reveals that there has been no curtailment in production of this plane, though the Truman Committee said there would be. True, in one of the two plants where it is built, monthly output has decreased. But that was to make way for another airplane which has priority over everything.

Our latest Stubblefield award goes to the Junior Chamber of Commerce of Wichita, Kan., for publishing a map showing the home town as the center of a big system of postwar global airlines.

Don't be over-impressed about the 6-ton bombs—or maybe it's 10-ton bombs by now. The experts are debating whether the same weight in smaller ones isn't better. And don't over-gage that word 'block buster.' In England, which gave us the term, a block is merely a unit or group of one or more flats.

Public reaction to fatalities among pilots training in this country is much more severe than it is to fatalities in air combat. Accordingly, training commands here at home are strongly tempted to stick by a comparatively safe regime. But trainees not experienced on the borderlines of safety are in more danger of operational accidents at the front. And this leads to washouts of more-expensive equipment—and of themselves.

A plan for bombing Japan was suggested the other day by a blond lady in a rose dress, standing by the cocktail bar. She said we should send up a formation, just the size and shape of flowery Nippon and when it was in place like a half sole, all bombs should be let go at once. Everything would be destroyed, the land would be plowed up—and fertilized with dead Jappos, ready to start farming. Wonder if the War Department is listening.

American Society of Tool Engineers' annual two-day meeting was underway in Philadelphia recently. Special feature was presentation in one session of series of papers dealing with engineering, production planning, tooling, actual foundry and machining production, inspection methods, etc., of a single vital war product, thus graphically integrating all problems.

Remodeled B-17 Fortresses still armed with guns have been put to transport jobs by 5th Air Force in the Southwest Pacific.

To test falling characteristics of bombs, which sometimes drop at 500 mph., Air Services Ordnance Dept. has built a 700 mph. wind tunnel in Boston, in anticipation of still faster falls.

North American's P-51 "Mustang" is now giving the Nips hell as well as the Nazis, the War Department discloses. It is revealed that this craft's operation against the Japs dates back to early January.

Air Forces men have been paid on time—even under dive bombing attacks—by a "flying banking service" operating along front lines. Millions in pay comes home every month through free Army Personal Transmission Accounts.

Past, present, and future are covered in three recent booklets: Development of Wright Aeronautical Corp. is recorded in a

short, illustrated history. "A Guide to Postwar Product Development," third in a series by the NAM, outlines suggested solutions for some major problems. And "What Your Town Needs for the Coming Air Age," by Wm. T. Piper, president of Piper Aircraft, is a very thought-provoking job on airport planning for average American towns—full of good practical ideas.

A five-part questionnaire is being mailed to flyers throughout the country by Zimmer-Thomson's Aircraft Specialties Div. to determine postwar market for a low-cost automatic constant-speed propeller, such as company has developed for light and medium-powered aircraft. Final query asks about flyers' future airplane ownership plans.

Construction proceeds on Lockheed's new $3,500,000 modification and rework base for Navy aircraft, to be known as Navy Lockheed Service Center. Location is adjacent to an airport near main company plants in Burbank, Calif. Personnel of 1,500 is planned.

Lastminutelines: The House's new Special Committee on Postwar Military Policy has listed on its agenda consideration of air bases and of means for their postwar maintenance . . . Geoffrey Smith, British jet propulsion authority is visiting the U. S. . . . Chrysler's huge Dodge Chicago plant, termed the largest aircraft engine factory in the world, is now in production (Wright 2,200 hp. plants) . . . James V. Forrestal, Under-Secretary of the Navy, states the Navy will get 28,000 combat planes in '44 . . . Brig. Gen. Samuel E. Anderson (he organized medium-level bombing attacks in European theater) has been appointed commander of the U. S. 9th Air Force Bomber Command, and Brig. Gen. Elwood R. Quesada now heads the 9th's Fighter Command. . . . It's now learned that during the invasion of Africa three L-4 Piper "Cubs" took off from carrier "Ranger" and landed on territory captured by the Allies.

★ CALLING NAMES ★

H. Russell Amory and **Wallace Mackenzie** have been chosen to head newly created executive staff of Aircraft Parts Manufacturers Association, Los Angeles. Amory will be general manager and Mackenzie head of business service section, replacing **C. C. Codding,** who resigned as association manager. **A. J. Brechtel** has been named to direct industrial relations. Amory was formerly with American Chamber of Commerce in London, England; Mackenzie was with Lockheed Aircraft Corp.; and Brechtel was with Plomb Tool Co., Los Angeles.

L. M. Bach is now general works manager in charge of manufacturing operations of all Lockheed A and B plants. He will be assisted by **D. J. Haughton,** asst. gen. works mgr., and **G. H. Prudden** (plant A) and **Penn Holter** (plant B) works managers. **E. Stackhouse** was named director of manufacturing development; **W. G. Dollmayer,** asst. works mgr. at plant A; and **B. W. Loyd** and **M. E. Mauer,** new asst. directors of manufacturing development. **Roger Lewis** is new director of purchases and **E. A. Brown** heads office of material control. Both report to **H. E. Ryker,** vice-pres. in charge of material control, and to **B. W. deGuichard,** now asst. to Ryker. **Walter G. Hoskinson** is new director of inspection for both A and B plants and is assisted by **Ralph M. Willis** and **Dale E. Hixson** as chief inspectors at plants A and B, respectively.

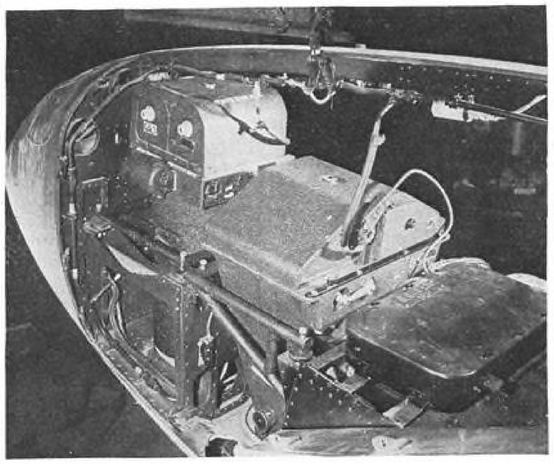

LOCKHEED F-5's "FIREPOWER"

First photo released showing camera installation in nose of Lockheed F-5 photo-reconnaissance version of "Lightning." Wide variety of installations are used, with cameras having lens running from 6 to 40 in., operated singly or as group. Latest device is shutterless continuous-strip camera in which film winds past narrow slit, its speed synchronized with speed and altitude of plane. F-5's "shoot" enemy installations from roof-top to substratosphere levels. Unarmed, "Focus Cat" pilots rely on high speed and maneuverability to evade enemy fighters and flak, saving of 400 lb. weight having upped craft's velocity as well as range.

Robert M. Boehm was incorrectly referred to as director of research for Grumman in article titled, "Masonite Dies Do A-1 Job" (page 142, Mar. Aviation). Actually he is director of research for Masonite Corp., Laurel, Miss.

Henry (Hal) Kerr is appointed to handle aircraft sales engineering activities for Hayes Industries.

Russell H. Potter is appointed national promotion manager for American Airlines.

Donald A. Sutherland was named field engineer in charge of sales and promotion activities for McCulloch Engineering.

Phil I. Harr, Fairchild service manager from 1936 to 1941 and production planning manager from 1941 to 1944, has been placed in charge of newly established quality control department at Hagerstown.

Lt. Comdr. Joseph W. Antonides, USN, is new Bureau of Aeronautics representative of Consolidated Vultee's Allentown Div., succeeding **Lt. Comdr. Harry Vought, Jr.,** USNR, now detailed to Edo Aircraft Corp.

Louis C. Boochever, Hill & Knowlton public relations representative, is assigned as resident director of Consolidated Vultee's Allentown Div.

At Hamilton Standard, **Sigmund A. Czarnecki,** chief equipment engineer, becomes staff asst. to factory manager, and **Park D. Ritchey** succeeds him as chief equipment engineer.

Darwin J. Adams joins public relations department of Interstate Aircraft & Engineering Corp. He was founder and original editor of **Sportsman Pilot,** co-organizer of Aviation Country Clubs, and at one time president of Aviation Advancement Corp.

John D. MacArthur is appointed district traffic manager for Continental Air Lines, replacing **Seale E. Fuller,** now in armed services.

Ray Collins heads new aviation division of Automotive & Aviation Parts Manufacturers.

John P. Bernard is now vice president and general manager of Sheffield Corp.

John L. "Jack" Carson, N. W. Ayer & Son public relations man handling Boeing Aircraft, leaves to become lieutenant (jg) in the Navy's amphibious command. He will be succeeded by **Bill Roller.**

Juan T. Trippe, Pan American president, and **Evan E. Young,** vice-president, were decorated with Heraldric Order of Christopher Columbus, bestowed by **Gen. Rafael L. Trujillo Molina,** President, Dominican Republic, in recognition of their friendship for country and meritorious services to it through the airline.

Col. **Roy W. Leggett** has been appointed chief of staff (he formerly was acting chief) to **Maj. Gen. John F. Curry,** commanding general of AAF Western Technical Training Command.

William H. Dayton, asst. western district supervisor, AAF, has been promoted to full colonel.

William Diltz, supervisor at UAL's Cheyenne modification center, was presented with a $500 War Bond for his suggestion which saved the line 20,000 man-hours annually.

Dr. Harry L. Andrews is now coordinator of training for Penn-Central.

C. C. West, Jr., on military leave from Continental Air Lines, was promoted to lieutenant colonel ATC.

Jerome Lederer joins Aero Insurance Underwriters as asst. manager; **Fred N. Davey** becomes asst. manager charge of production; and **Donald M. Stewart,** asst. manager charge of underwriting for the company.

Jacob Jacobsen, Boeing Aircraft employee, recently celebrated his 25th year with company.

N. F. Vanderlipp, production manager of Curtiss Wright Corp., returns to Bellanca Aircraft, as new president.

Elmer R. Crane has been named general manager of radio division of Lear Avia.

Edward Curtiss Wells, chief engineer for Boeing Aircraft, was named "Seattle's Young Man of the Year" by Seattle Junior Chamber of Commerce and was awarded Distinguished Service Key.

Sylvester J. Roll is named asst. to general traffic manager, PAA. **Richard C. Walker,** advertising manager, is commissioned lieutenant in Navy and is now on leave from Pan American; and **Kenneth C. Gunter** is appointed acting advertising manager in his place.

Jerome G. Stock, Wright Aeronautical controller, and **Walter R. Hart** secy-treas. and comptroller of Aircraft Industries Co., have been elected to membership in Controllers Institute of America.

Joseph P. Ripley, New York investment banker, was nominated for election to United Aircraft Corp's board of directors.

Allan H. Mogensen, who has been conducting Lockheed's work simplification program, is on a temporary assignment for War Department and will be stationed outside of U. S.

J. K. Gannett, Austin Co. vice-president, and its eastern district manager since 1928, is appointed director of engineering.

Floyd M. Williams is appointed general supt. of airmail traffic of American Airlines.

Comdr. James O. Biglow, USN, is appointed asst. Bureau of Aeronautics representative at Glenn L. Martin.

Realignment of Pratt & Whitney's engineering staff involves new titles as follows: **Guy E. Beardsley, Jr.** becomes asst. to chief engineer **Andrew V. D. Willgoos; Alexander H. King** is appointed chief designer; **Andrew L. Riker** becomes asst. chief inspector; **Donald S. Hersey** succeeds Beardsley as chief of auxiliary development; and **John H. Marchant** is assigned to head a new division having to do with fluid mechanics and heat flow. **Benjamin T. Howes,** as project engineer, takes over engine cooling and volumetric efficiency. Former engine group becomes section "A", and in this section **Augustus Hasbrouck** is appointed chief design engineer. Meanwhile **Lawrence Castonguay, Harry W. Gunberg, Nathaniel Haynes, Philip P. Newcomb,** and **Lewis M. Potter** become design project engineers. Former production engine group is now section "B" and will be headed by **Gilmoure N. Cole** who continues as chief design engineer; **Erwin Beyer, Carl N. Furay, John S. Hasbrouck, Charles A. Morss** and **Chester R. Wells** are design project engineers.

R. B. Moon, former chief of receiver development at Bendix Aviation's radio division, is named Pacific Coast branch manager of radio division.

Al J. McCullough and **Jack E. MacConville** are placed in joint charge of industrial instrument sales for Brown Instrument Div. of Minneapolis-Honeywell. **Kentner L. Wilson** becomes branch manager of Detroit office.

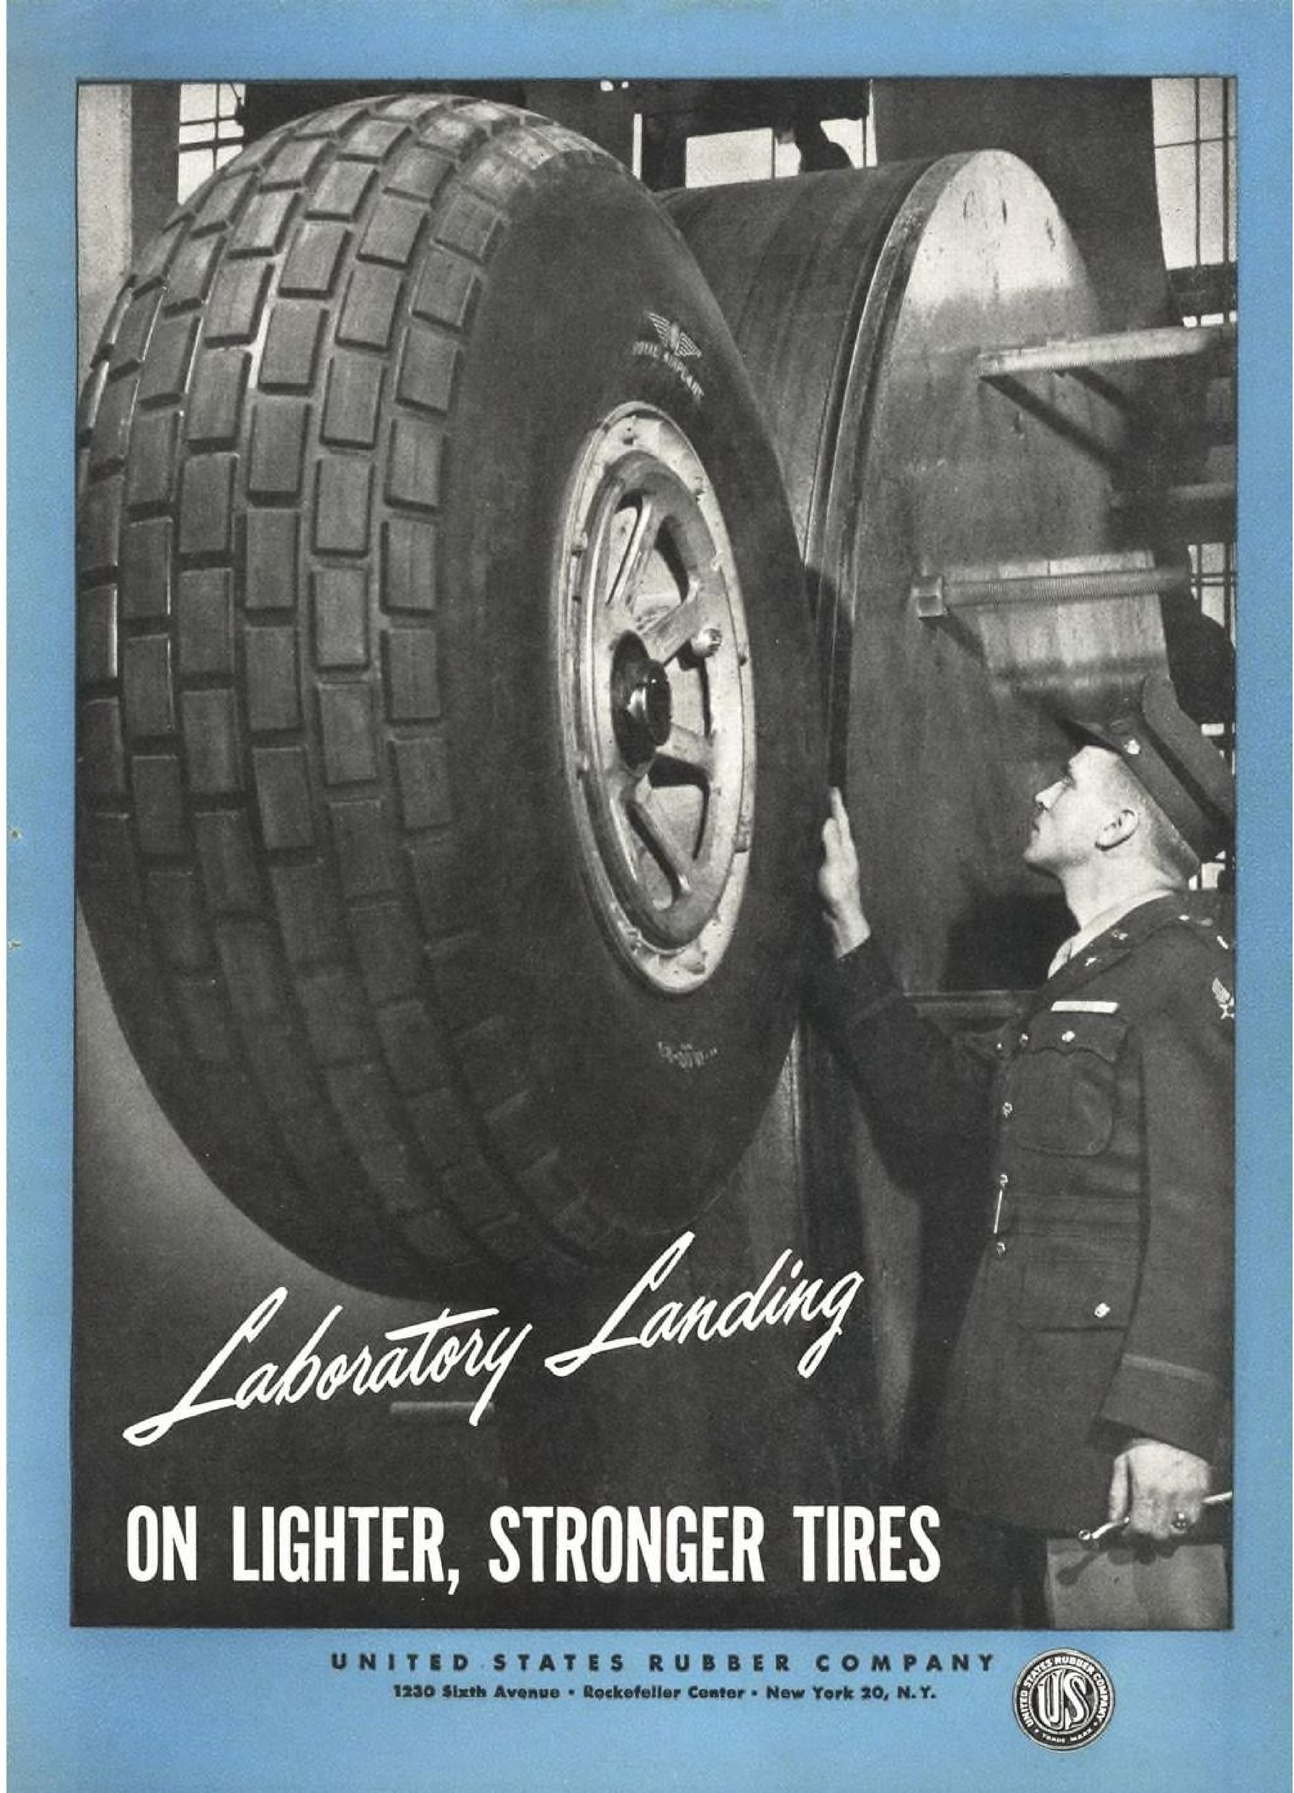

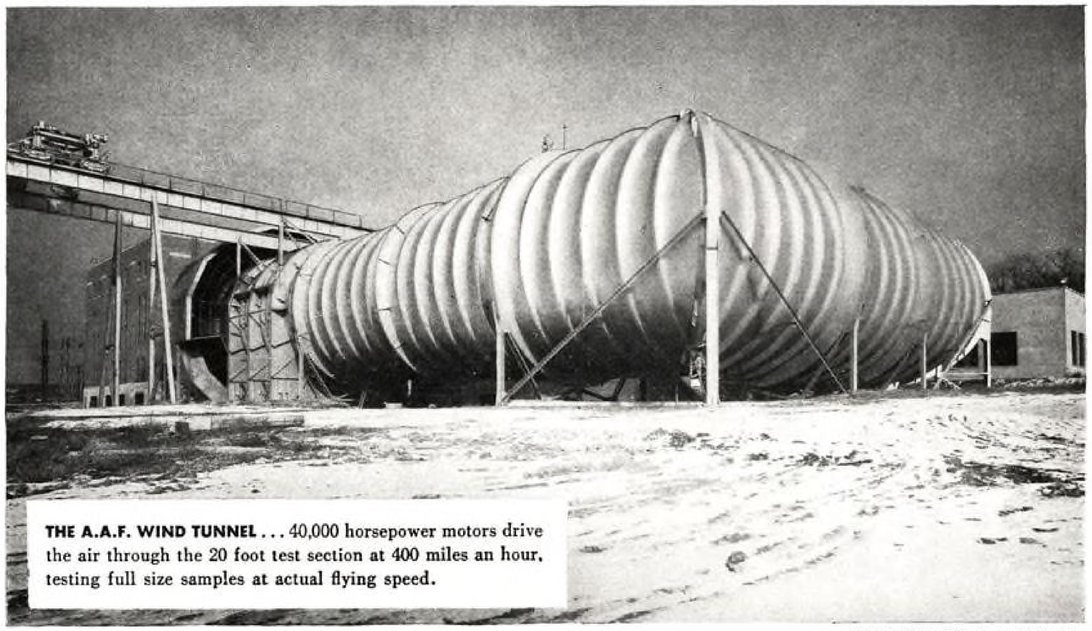

THE A.A.F. WIND TUNNEL . . . 40,000 horsepower motors drive the air through the 20 foot test section at 400 miles an hour, testing full size samples at actual flying speed.

Official Photo U.S Army Air Force

FINDING TOMORROW'S ANSWERS TODAY!

The Army Air Forces must have the answers to tomorrow's questions — today.

That is why in 1917, the War Department established an aircraft engineering laboratory at Dayton, Ohio. Since that time, AAF technicians from this field have worked hand in hand with airplane tire manufacturers to build lighter, stronger, safer tires, to build better equipment for every type of service in the air.

Today in a giant, 400 mile-an-hour wind tunnel, they are testing new types of radio antenna masts electroplated by the United States Rubber Company's Ekko Process and many other important new developments. In the Materials Lab they are testing cotton and rayon and nylon cord.

In service and in combat they are piling up data under actual flight conditions . . . and passing that information on to American industry. And from the war theatres of the world, the experience of combat fliers channels back to the nation's builders of airplanes and airplane equipment.

Planning, testing, searching far into the future, the AAF, working with industry, is keeping our Air Forces out in front of the enemy in fighting power — by finding the answers to tomorrow's questions today.

• • •

For the invaluable cooperation of all branches of the Army, Navy and Merchant Marine in their constant effort to improve the equipment of our fighting men, United States Rubber Company expresses its sincere appreciation.

1230 SIXTH AVENUE **UNITED STATES RUBBER COMPANY** ROCKEFELLER CENTER • NEW YORK 20, N. Y.

HOW THE AAF HELPS INDUSTRY BUILD BETTER EQUIPMENT FOR OUR FIGHTING MEN

Official Photo U.S. Army Air Force

LABORATORY TESTS . . . In the Materials Lab of the AAF all parts of the tire are tested, the findings tabulated, compiled and reported to the tire makers. C. J. Cleary, Assistant Chief, Materials Lab says, "Give us a material that has no weight and no mass and having infinite strength — and we will have reached our ultimate goal."

COMBAT TESTS . . . In actual combat and in service tests the performance characteristics of all types of tires are constantly checked. U.S. Royal Airplane Tires with bodies built of rayon or nylon and treads of synthetic rubber along with tires of all other manufacturers are tested. The results are passed along to "U.S." and other tire makers.

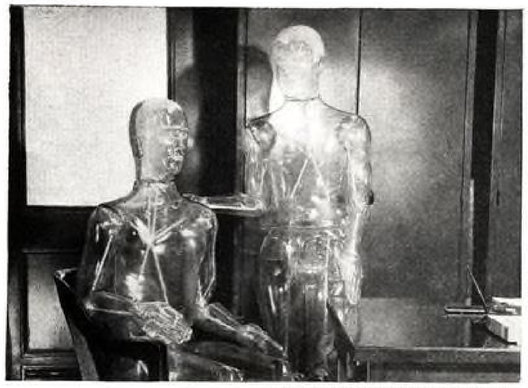

Official Photo U.S. Army Air Force

THE PLASTIC MEN . . . The Aero-Medical Lab studies the effect of high altitudes and low temperatures on flying personnel. Using plastic men like these, designed by skilled anthropologists, after careful study of Air Force personnel measurements, the AAF tries out "U.S." clothing and footwear.

Official Photo U.S. Army Air Force

PROPELLER TESTS . . . On this 6,000 horsepower electric whirl rig, the Propeller Lab applies the torture test to the latest types of propeller equipment. On these whirl rigs, United States Rubber Company's latest development for the elimination of ice on propeller blades gets an accelerated adhesion test.

Courtesy Consolidated-Vultee

PROVED
in the Laboratory in Service Tests and in Combat

There has been no guesswork about U.S. Royal Airplane tires. Every tire in the line has been tested in the laboratory, tested again under the closest observation . . . and then subjected to the most severe test of all . . . actual service.

The U.S. Royal Block Tread has proved itself on fighters, bombers and commercial airliners on almost every kind of landing strip . . . on our airports at home and on emergency landing fields in Africa, Italy and the South Pacific. Scientifically engineered for the greatest traction and serviceability, the U.S. Royal Block Tread is a standard among airplane tire designs. With the switch to synthetic rubber treads, the U.S. Royal Block Tread is again proving its stamina.

The U.S. Royal Ice Grip with its positive, non-skid grip on icy runways, the U.S. Channel Tread and the U.S. Royal Plain Tread nose and tail wheel tires each does its own specialized job safely and dependably on test...and in service.

SERVING THROUGH SCIENCE TO SPEED THE VICTORY

U.S. ROYAL SMOOTH CONTOUR TAIL WHEEL TIRE . . . Like every U.S. Royal Airplane tire, the tail wheel tire is available in Static Conductor Construction to protect the plane and crew from static shock. Specially designed for the stresses and strains of tail wheel service.



U.S. ROYAL SMOOTH CONTOUR BLOCK TREAD . . . The sharp edges of the U.S. Royal Block Tread protect against either forward or lateral skids...give sure-footed safety in landings and take-offs and deliver long, dependable service. It is the leader of the "U.S." Airplane Tire line.

U.S. ROYAL SMOOTH CONTOUR ICE GRIP . . . This radically different type of airplane tire tread design originated by United States Rubber Company has proved in tests on ice covered landing fields its ability to cut through ice and bring the plane to a safe, sure stop.

UNITED STATES RUBBER COMPANY

1230 SIXTH AVENUE • ROCKEFELLER CENTER • NEW YORK 20, N. Y.

AMERICA AT WAR

Aviation's Communique No. 29

Two years after the Air Force was established as one of the three component forces of the Army, Gen. George Marshall, chief of staff, says it is approaching complete air supremacy in practically every theater—and at a much faster pace than had been expected.

With 2,385,000 men in 11 air forces overseas, and four air forces plus many training establishments within U. S. borders, Army aviation is at its peak, accordingly is stopping personnel transfers from the ground forces. Nine weeks have been added to the fighter pilot's training period, five weeks to the schedule of bomber pilots, and important extensions have also been made in other phases.

CAA's War Training Service and the primary and basic schools contracting directly with AAF are all being curtailed and will be eliminated in a matter of months. The Army stopped initial training courses entirely some months ago, leaving it all to civilian schools. From now on, only enough new trainees will be taken in to serve as replacements. The Army may eventually resume schooling them itself.

But as the Air Force reaches the height of its power, inflicting losses of 3.8 on the enemy to 1 of its own, dropping nearly 10,000 tons of bombs on Europe in one week, and devastating large areas of enemy productive and military works, it also meets with some disappointments. The Air Force command says it knew what not to expect from its heavy bombardment of Cassino. But the enemy stayed there and the public didn't understand why. Though such works as Germany's ball bearing sources were badly wrecked, Nazi fighters keep on coming up—taking 96 Allied planes one day, and 80 American planes another.

Luftwaffe Shifts

Compared with damage inflicted, and with losses of men sustained by the Russian ally, attrition of British and American aviation is not too bad. AEF destroyed 11,042 Axis aircraft in all theaters, in the air and aground, in 1943, at a cost of 2,805 of its own. Though Nazi fighter resistance often is concentrated with deadly effect, just as often allied air missions swarm over Hitler's Europe at will, seeing none or few hostile aircraft.

The Luftwaffe shifts its air defense rapidly—from Italy to France to Berlin—to cover its weakness. Allied air commanders still hope that, between hacking away at the invasion coast, supporting the Italian attack, and doing other jobs, they can smash enough of the enemy's aircraft plants so that what remains of Hitler's air power can be knocked down. Even then, if Italy is a true lesson, the walking Army will have no cinch. Presumably German engineers are doing an even better job of fortifying the French coast than they did south of Rome.

Other points to note: AAF heavily attacked Budapest for the first time . . . The British again put the Nazi battleship "Tirpitz" out of action as she lay in a Norwegian fjord . . . American bombers are filling more than half of their capacity with oil magnesium fire bombs, which often prove more destructive than explosives . . . Along with bombs recently went leaflets showing Germans the comparative size of the B-29's, which will soon be upon them . . . The Army has called for new priority ratings on heavy artillery, to do jobs that airplanes cannot do . . . And dispatches say that naval bombardment will be important when the cross-channel battle starts. Churchill said, in his war summary, that British - American air forces now can send up 1,000 bombers to the enemy's 100, adding that the allies have leadership in radar, both for attack and defense.

Pacific Successes

In the Pacific, the Navy has hit the Palau Islands, only 600 mi. east of the Philippines. The Japanese people believe that their navy is backing away to draw the United States into a trap, but everyone else sees that the enemy's sea power is not strong enough to match its opponents at long range. Allied aviation and sub and surface forces are pinching off Jap supply lines, and the island bases are withering. Truk, Jap main base in the Carolines, was recently pounded eleven times in six days, and it was due to be taken or by-passed.

An attack on the Philippines any time now would surprise no one. These islands are too far from Japan to be used immediately by us as a base for heavy air bombardment, but they stand squarely in the way of the direct route which Adm. Nimitz says he is taking toward a beachhead in China.

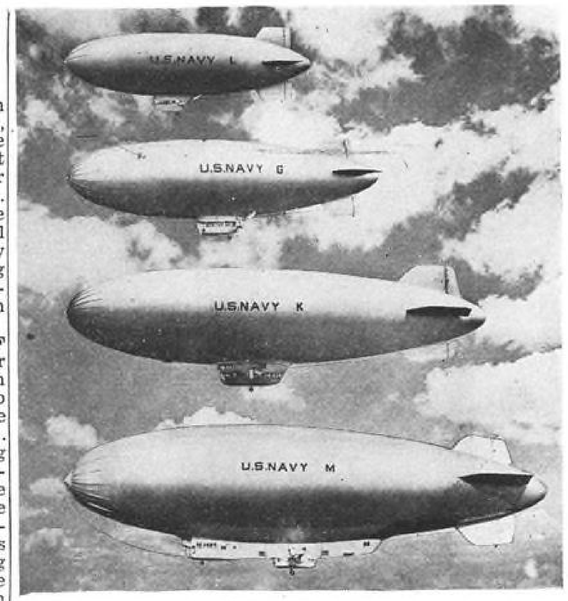

A SIZE FOR EVERY PURPOSE

Composite photo shows, proportionally in scale, four types of blimps built by Goodyear for Navy. "L" ship at top is 150-ft. primary trainer; "G" is 190-ft. advanced trainer; "K" is 250-ft. sub patrol and convoy craft; and "M" is 290-ft. sub patrol-convoy job carrying crew of 10. Car of "M" is 115 ft. in length, with maximum width of 10 ft. and maximum height of 20 ft.

★ CANADIAN NOTES ★

By James Montagnes

Production has been started at Vickers, Ltd., Montreal, on Douglas DC-4 transports for use on TCA main lines after the war, according to an Ottawa announcement, which also revealed that development work is under way in the Dominion on jet engines and aircraft.

The government has ordered domestic divorcement of ownership and operation of airlines by surface transport organizations. It is stated that within a year after hostilities cease in Europe, Canada National Railways (TCA interest) and Canadian Pacific Railway (CPA interest) must relinquish their airline operations to separate companies.

Airports at Edmonton, Grande Prairie, Ft. Nelson, and Watson Lake, on Alaska Airway, will be improved this year.

Specific production figures were released last month; Canada, it's stated, will make 4,312 aircraft this year as against 4,133 in '43, with more combat planes included. "Lancaster" production is to go from the current 9 per month to 17 by May and 30 by December; "Mosquitos" from 33 to 52 per month by June; Curtiss "Helldivers" from the present 20 to 70 monthly by midsummer, 130 monthly by the year-end; and Consolidated "Catalinas" from current 37 monthly to 50 by December. Trainer production will be reduced. To mid-March this year, 39 "Lanks" had been delivered and 183 "Mosquitos" built. Poundage has jumped from 1,628,118 in '40 (when 846 planes were made) to 20,088,864 last year (4,133 planes). Estimated poundage for '44 (4,312 planes) is 21,430,000.

A record Toronto-Winnipeg run of 3 hr. 5 min. was recently made by a "Lancaster" (7 hr. is the TCA schedule) . . . Canada is closing 28 air training schools . . . Capt. Roy A. Brown, DSO, DFC with bar, Canadian fighter pilot of World War I credited with shooting down Baron von Richthofen, recently died near Toronto at the age of 50. (Editor's note: Precise circumstances of the death of the "Bloody Baron" have remained a matter of controversy. Some World War I'ers claim he was killed by fire from the ground.)

Canadian Pacific Air Lines will establish its main overhaul and repair plant for both aircraft and engines in Winnipeg. It is also planned to transfer CPA's engineering division from Edmonton to Winnipeg.

An aerial survey of the Hudson Bay and Hudson Straits was made last summer, the RCAF reveals. Covered were 100,000 sq. mi. of Ungava Peninsula, Baffin Island, and the west coast of Hudson Bay.

By F. H. Fullerton

First magnesium plant for Vancouver, B. C., has been incorporated as Magnesium Foundry, Ltd., with capitalization at $100,000. Principal product of the new factory will be airplane parts. Magnesium supplies in ingot form will be shipped from the Eastern United States.

Erection of a new airport at North Vancouver, B. C., above the fog line, is now proposed. A large wooded tract is being examined, and surveying will not await the end of the war if possibilities are good. The tract is about the same distance from Vancouver's center as the present port on Sea Island.

Provincial Conference on post-war planning, called by the B. C. Shipyard Union Federation, was being held in Vancouver at press time. Employee delegates of Boeing Aircraft of Vancouver suggested that their plant make washing machines and other peacetime household equipment after the war.

AXLES of War

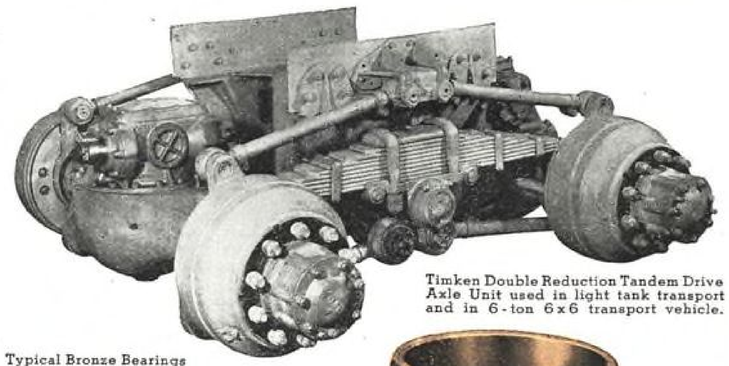

Timken Double Reduction Tandem Drive Axle Unit used in light tank transport and in 6-ton 6x6 transport vehicle.

Typical Bronze Bearings used in Timken Axle applications.

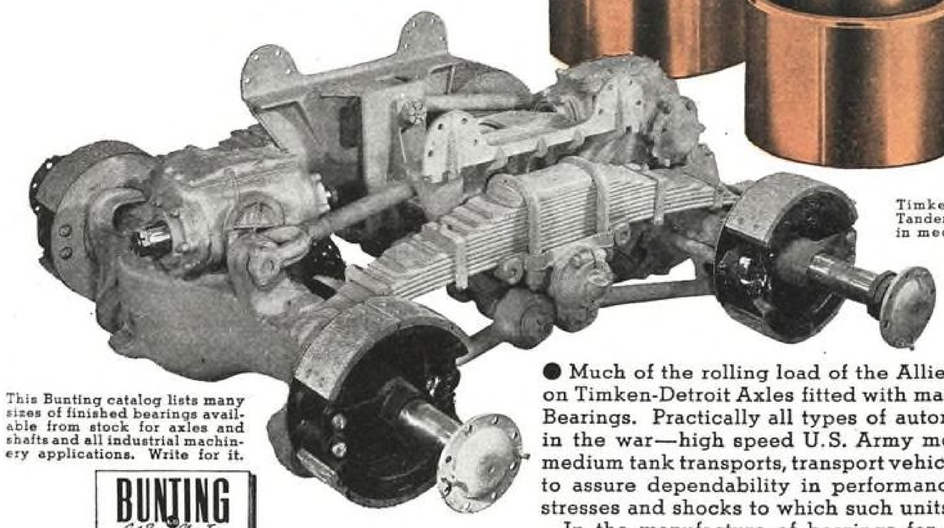

Timken Double Reduction Tandem Drive Axle Unit used in medium tank transport.

This Bunting catalog lists many sizes of finished bearings available from stock for axles and shafts and all industrial machinery applications. Write for it.

● Much of the rolling load of the Allied offensive is carried on Timken-Detroit Axles fitted with massive Bunting Bronze Bearings. Practically all types of automotive vehicles used in the war—high speed U.S. Army motor trucks, light and medium tank transports, transport vehicles—are so equipped to assure dependability in performance under the terrific stresses and shocks to which such units are subjected.

In the manufacture of bearings for these and other war equipment applications we have learned many things which will be of value to designers and manufacturers of machinery for war or peace. You will not be obligated in any way by discussing your bearing problem with our engineers and research staff. The Bunting Brass & Bronze Co., Toledo, Ohio. Warehouses in Principal Cities.

Bunting

BRONZE BUSHINGS • BEARINGS • PRECISION BRONZE BARS

New High Records—9,118 Craft, 103.4 Million Pounds—Set in March; Labor Turnover Up

Report company achievements . . . Re Model 39 and DC-7 . . . CPFF Still an issue

A new unit production record was set in March when the industry delivered 9,118 planes. In terms of airframe weight, production exceeded the million-pound mark for the first time, with an estimated 103,400,000 pounds including spares. C. E. Wilson, chairman of the Aircraft Production Board, said that 86.5 percent of the units were bombers, fighters, and transports. He congratulated the industry for its "remarkable over-schedule achievement."

There is reason to believe that in the future monthly unit output figure may fall occasionally below the March record due to constantly increasing weight of units, engineering changes, and the draft of men under 26.

The rate of labor turnover is still increasing in the aircraft industry. WPB puts the figure at 2.82 workers in Jan. 1942; 3.86 in Jan. 1943; 3.86 in Dec. 1943; and 4.31 in Jan. 1944. The Manpower Commission has some higher figures. But meanwhile, development of innumerable devices for maximum labor utilization is cutting down worker hours per pound of airframe produced. The figure for the Pacific Coast group, in Jan. 1943, was 1.67 direct man-hours per pound; by December it had been trimmed to .87 of a man-hour.

An official statement says the United States has produced 153,061 planes during the past three years, of which 105,126 were combat types. Average production is about 350 units per day. The Foreign Economic Administration announced that up to Mar. 1, 1944, 8,800 planes had been sent to Russia, about 4,000 of which were flown to their destinations. Majority were Bell P-39's, with many Curtiss-Wright P-40's, Douglas A-20 attack planes, and North American B-25 medium bombers. A previous FEA report said 7,000 planes have been exported and paid for in cash, mostly by the British. About 4,000 went to the Allied forces in the Pacific and Far Eastern theatres, with 16,000 to all other combat and training areas.

Report Company Achievements

Boeing recently announced a world's record for a single month's delivery of completed four-engined bombers, "exceeding by a substantial margin the output of any other plant, American or foreign," and beating its own previous month by 25 percent. United Air Lines revealed that 3,500 B-17's had been processed in its Cheyenne modification center since early 1942, Continental Air Lines Denver center put through 1,600 B-17's since July, 1942, plus a few each of a British type and North American P-51's. Continental has exceeded its modification quotas monthly from 9 to 20 percent

From Wright Aeronautical came word that between Pearl Harbor and last Jan. 1, production of *Cyclone* and *Whirlwind* engines totaled an amazing 184,200,000 hp., termed by the report an all-time record for production of aircraft engines designed by one company.

Included were installation engines and spares built in Wright's Paterson and Cincinnati plants, also *Cyclone 9's* by Studebaker for B-17's and *Whirlwind 9's* of 400 hp. by Continental for tanks and gun carriers. Bulk of production was on *9's* (1,200 hp.) and on two models of the *Cyclone 14* (1,600 hp. and 1,700 hp.). Volume in '43 was swelled as the *Cyclone 18* (2,200 hp.) was put in quantity production—for new superbombers, other war craft, and also Lockheed C-69 and production versions of the Martin *Mars*.

Republic Aviation has announced it has delivered more than 6,500 P-47's in the 48 months since the first model made its test flight. The *Thunderbolt* is mentioned with increasing frequency in front news; it escorts heavy and medium bombers, also attacks ground objectives with guns and bombs.

Allison engine production recently passed the 50,000 unit mark. The first Allison was flown in Dec. 1936 on an Army Bell A-11 fighter. Today, 50 percent of all U. S. Army fighters are powered by Allisons; included are P-39's, P-51's, P-38's, P-40's, and A-36

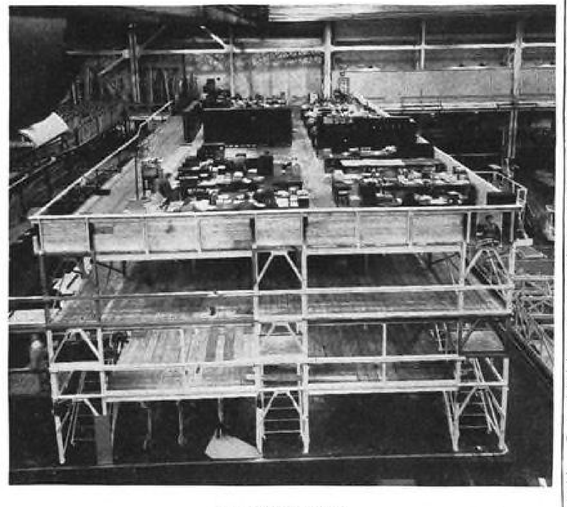

"DECKED OUT"

—to save space. Problem was Baltimore Martin plant critically needed extra manufacturing area—but where get it? Answer: Certain of huge PBM hull fixtures, no longer required, were floored-in, three-deck style, to give 22,464 sq. ft. of additional space to house timekeepers, industrial engineers, personnel counselors, and clerical workers. Thus old full-headroom office layout was obtained for plane making. An emergency proposition—but it worked.

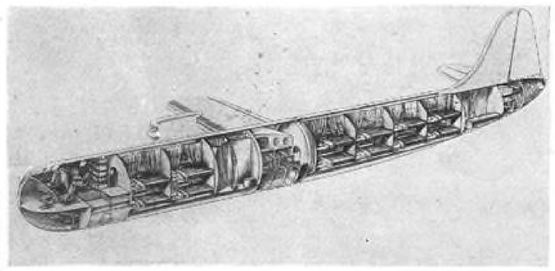

CONVAIR BIDS FOR FUTURE TRANSPORT BUSINESS

Cut-away of Consolidated Vultee's Model 39, new 240-270-mph. passenger transport slated for flight tests late last month. Using B-24's wing, power plants, and landing gear, the 39 has 90-ft. fuselage length, compared with B-24's 66 ft. 4 in. Five cabin capacities are possible, ranging from 48-52 passengers for day runs to 24 for sleeper operations. With 48 passengers, baggage, and 1,200 lb. of mail, plane will have 2,500-mi. range. Basic gross weight is 56,000 lb.; provisional 62-64,000.

★ FOR THE RECORD ★

Waterbury Button Co., Waterbury, Conn., has changed its name to Waterbury Companies, Inc.

Evans Reamer & Machine Co., Chicago, formerly Evans Reamer Co., has moved to a larger plant in New Lexington, Ohio. Vice-President Hillshafer continues as general manager.

Duro Metals Products Co., Chicago, has started an addition to its Kildare Ave. plant.

Electrical Apparatus Co. has opened new offices at 1200 Soldiers' Field Rd., Boston.

Electric Service Supplies Co., Philadelphia, has changed its name to Electric Service Mfg. Co.

General Airport Co. has been formed for purpose of building and operating airports. Offices are at 101 Park Ave., N.Y.C.

Cutler-Hammer, Inc., Milwaukee, has opened a new office in C. of C. Bldg., Columbus, Ohio.

Aviation Associates, a firm of consultants for industry, has been formed, with offices at 664 N. Michigan Ave., Chicago, and 510 Camp St., New Orleans.

Briegleb Aircraft Co., Van Nuys, Cal., announces that it is developing new additions to its line of gliders and sailplanes. Erratum: This firm was erroneously listed as Sailplane Corp. in our February directory number.

Rogers Machine Works has moved its offices to 1807 Elmwood Ave., Buffalo, N. Y.

Globe Corp., Joliet, Ill., has acquired assets of Frankfort Sailplane.

Bendix Aviation Corp. has leased space at 71 West 23rd St., N. Y. C.

jobs. Engine No. 1 was rated 1,000 hp.; No. 50,000, 1,800.

Re Model 39 and DC-7

Consolidated Vultee has released some details on its Model 39, scheduled to be test-flown this spring at San Diego. Mounting four 1,100-hp. Pratt & Whitney engines, this plane may not be in the postwar "large" class, but it is considered a practical size (see illustration top last page).

Douglas DC-7, postwar airline design, will carry 86 passengers by day or sleep 76. It will have a span of 173 ft. 3 in.; fuselage 123 ft. 4 in. long; over-all height 43 ft. 8 in.; gross weight 85,890 lb.; useful load 59,100; speed estimated up to 400 mph.; and cruising range 4,000 mi. Called for is supercharged cabin, and ceiling is estimated at 40,000 ft. Cost will be around $1,250,000. Craft will be equipped with tricycle gear, two wheels each leg; and specified are four 3,000-hp. engines.

CPFF Still an Issue

A battle between Congress and the Army and Navy over cost-plus-fixed-fee contracts was not ended at press time. War Contracts Subcommittee of House Military Affairs Committee was considering a resolution to stop or drastically curtail this form of contract, favor being expressed for the fixed-price type. The Armed Services insist they must have the CPFF type in some cases. Aero Chamber Pres. James P. Murray, addressed to the Committee a statement contending that there is as much incentive under CPFF contracts to produce as under fixed-price agreements. He said that elimination of flexibility under CPFF contracts would impede the war effort.

★ ASSEMBLY LINES ★

Boeing is converting its huge Seattle Plant 2 for production of B-29 *Superfortresses.* Thus, company will put its entire effort into the new craft, both Wichita and Renton having already gone to work on B-29's. Douglas and Lockheed will continue on B-17's.

United Air Lines ran 3,500th Boeing B-17 through its Cheyenn modification center.

Goodyear Aircraft completed its 1,000 FG-1 "Corsair" less than a year after delivering first one to Navy.

Curtiss-Wright hollow steel propeller designed, tested, and produced in less than eight months, are giving Republic P-47 "Thunderbolts" 30 percent faster rate of climb, according to Robert L. Earle, C-W Propeller Div. vice-president and general manager.

Lockheed opens new $100,000 radio testing station in Santa Monica mountains, 6 mi. from main Lockheed plant and on "line of sight basis" for all of major southern California plants. Equipment includes 14 receiving sets and seven transmitters permitting operation across entire range of radio frequencies.

National Electric Manufacturers Assn. has opened an information center at 155 E. 44 St., New York City, under direction of John M. Moorhead, formerly of N. Y. "Herald-Tribune" and Kansas City "Journal."

Breese Corp. employees' accident rate dropped 59 percent in 1943 despite 30 percent increase in number of workers, Pres. J. T. Mascuch reports.

Aircraft industry separations in January were 6.16 per 100 employees, compared with 6.13 in Jan., 1943, reports WMC.

Convair's Vultee Field Div. will fabricate outer wing panels for the Navy version B-24 bomber. This new project marks new emphasis on combat craft as BT-13 trainer production tapers off.

WPB removed restrictions on aircraft grade Western hemlock, since Sitka spruce and Noble fir are being produced in sufficient quantities.

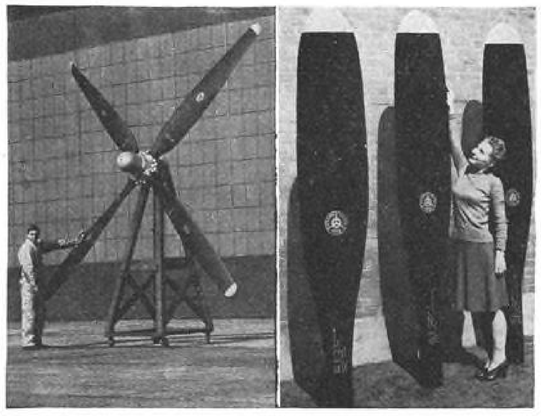

BIGGER AND BETTER

Four-blade Hamilton Standard "Hydromatic" propeller (left) is called "largest airplane propeller being produced on a quantity basis." Right: Blades of 16 ft. 6-in. dia. Curtiss electric propeller to be used on 20 Martin JRM-1 "Mars" cargo transports.

PRODUCTION-BATTLE CITATIONS

★ Two Stars ★

N. A. Woodworth Co.
Bound Brook Oil-Less Bearing Co.
U. S. Rubber Co. (Mishawaka plant)

★ One Star ★

Bristol Co.

Army-Navy "E"

Aircraft Accessories Corp. (Burbank plant)
Aeronca Aircraft Corp.
Chase Brass & Copper Co.
Goodyear Tire & Rubber Co. (Kelly-Springfield plant)
Gray Mfg. Co.
General Electric Co. (Erie plant)
E. F. Johnson Co.
Langley Corp.
P. R. Mallory Co.
Morse Instrument Co.
Monarch Machine Tool Co.
New York Air Brake Co.
Reliance Mfg. Co. (Triumph plant)
Sillcocks-Miller Co.
Silver Creek Precision Corp.
Simplex Products Corp.
Western Automatic Machine Screw Co.
U. S. Motors Corp.
U. S. Rubber Co. (Naugatuck plant)
Verson Allsteel Press Co.
Yoder Co.

UAL's Cheyenne modification center recently put finishing touches on its "3,500th Headache for Hitler"—one more in the steady stream of B-17's passing through the center.

Completing collation of February figures, AWPC West Coast reports member output for the short month jumped to all-time high of 32,469,000 lb. (2,569 planes). While only 10 more craft were made than in January, weight was up 577,000 lb.

★ KNOW-HOWS ★

One idea every five hours is the year's record of Goodyear Tire & Rubber Co's "Idea Assembly Line" which has put 1855 employee ideas to work. In all, Goodyear paid $57,000 to employees for these ideas, of which $37,000 was paid to aircraft workers.

DuPont has found a new use for cellulose sponge—filling of wing spaces around self-sealing fuel tanks to absorb the small leakage inevitable after perforation by bullets. By treating with Aridex water repellant, sponge is prevented from absorbing moisture and thus adding to plane's weight.

Bendix saves 800 tons of metal per month at South Bend plant by segregating metals into alloy types throughout all production stages. Also saved are 84 tons of paper through a "Don't Burn Anything" program, while nationwide salvaging of old automobile carburetors has brought in 10,000 lb. of zinc and 5,000 lb. of aluminum.

Foundry air in magnesium plant of Eclipse-Pioneer Div. of Bendix, is conditioned at the rate of 45,000 cu.ft. per min., enabling large numbers of women to be employed unendangered by fumes.

Lear Avia's President, Wm. P. Lear, told the combined meeting of Franklin Institute and AIEE that electro-mechanical control systems for aircraft had achieved such a high peak of efficiency that there is not a single known instance where any American plane has turned back from failure of the electrical control system.

Ohmite Mfg. Co. has a new system of hammer-testing of castings or forgings. Sound of the blow is picked up by a microphone, amplified, then passed through a filter to suppress harmonic frequencies. Remaining base frequencies indicate whether material is sound.

Elastomers of a new type are announced by B. F. Goodrich Co., which combines plasticized vinyl chloride resins with butadiene type synthetic rubber to effect vulcanizable blends reported to possess best qualities of both materials. Company states this is first time gap between plastics and rubbers has been closed.

Transparent plastics are replacing metal castings in many complicated accessories, according to Glenn L. Martin, thereby saving much time in inspection and enabling learners to grasp methods of operation quicker.

Substitution of 1/32-in. rubber sheeting for grease in Glenn L. Martin's stretching machine dept. has resulted in increase of 50 percent in output and saving of both material and labor. By old method sheets were greased and later scraped clean by hand, after which they were given a vapor bath. Through use of rubber sheets, cost of operation has been decreased by saving of labor. Also cited is reduced price of rubber compared to that of grease as applied.

Two engineers, Marshall G. Whitfield and Victor Sheshunoff of Al-Fin Corp., a Fairchild subsidiary, have prefected method whereby chemically pure aluminum and steel may be bonded. Process has been used in combining steel cylinders with aluminum cooling fins on Fairchild V-12 engines, with saving in weight and considerably added efficiency.

Electrically heated anti-ice "skin" for propellers is one new development announced, and anti-ice propeller-blade "boot" is another. Former was brought out by B. F. Goodrich, working in conjunction with NACA, while latter is Goodyear Rubber Co. product. Of conductive synthetic rubber, "skin" operates like household electric heating pad and is especially for use where standard pulsating deicer cannot be applied. Goodyear unit, also using synthetic rubber and employing electricity, is additionally stated to protect blade from small objects, such as sand and pebbles.

Army considers substitution of aluminum or magnesium for steel in runway mats. Which of two light metals is to be favored has not yet been decided, but both metals, because of weight factor, afford shipping and handling convenience. Story that heat reflection from light metal in landing mats would cause troublesome air turbulence has been discredited.

ALUMINUM DIE-PRESSED FORGING by REVERE

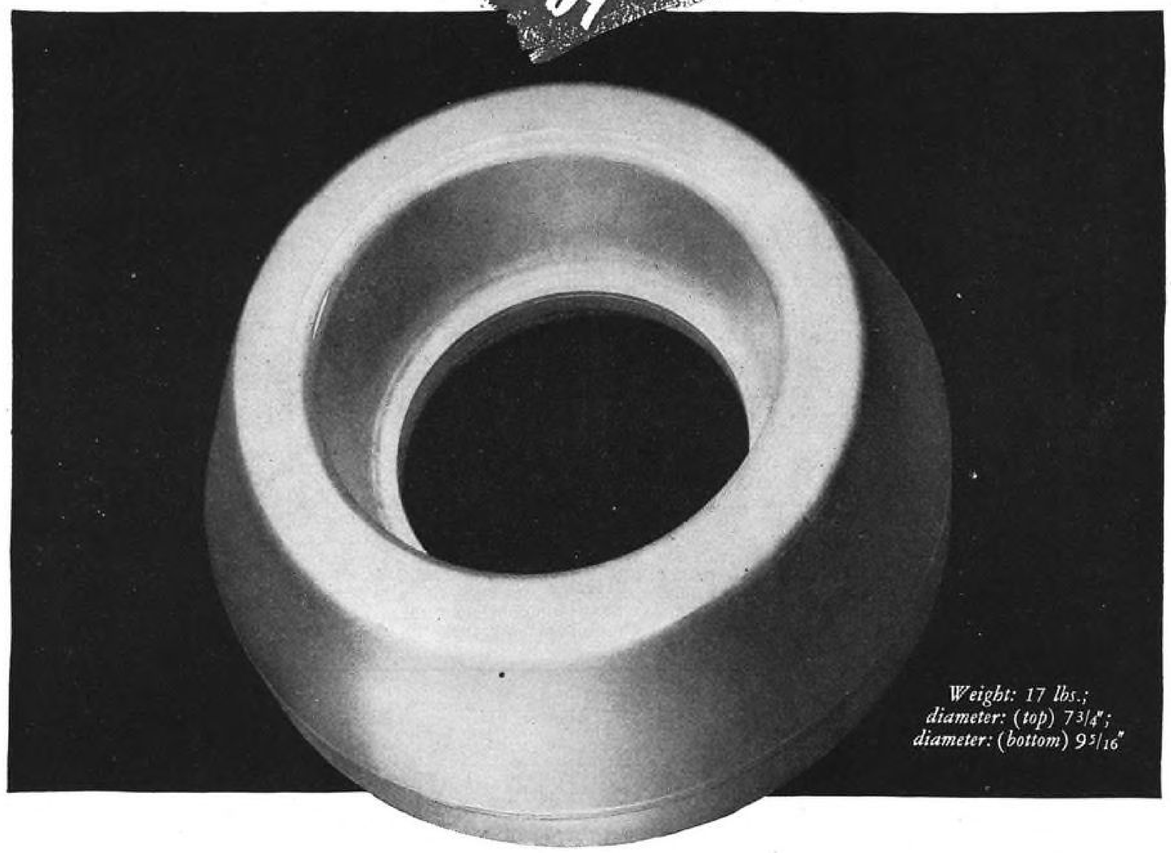

The cylinder barrel muff which we illustrate is typical of the strong close-grained, die-pressed aluminum forgings in which Revere has pioneered so successfully—especially in the aviation industry.

This particular cylinder barrel muff is used in certain types of radial aircraft engines and with special success in one of the famous engines extensively used by the Navy. When finally machined, the resultant thin fins reach almost to the core of the cylinder itself and provide an unusually large cooling surface.

Revere forgings are also available in copper, various copper-base alloys and magnesium. Almost any shapes and sizes can be had, even those ordinarily pronounced "impractical" or "impossible".

Revere will be glad to offer—*without obligation*—technical advice on any special problems you may have in die-pressed forgings. Write Revere Executive offices.

FREE! A 54 page manual, "Revere Copper and Copper Alloys—Technical Information for Product Designers," with 106 graphs relating to physical and metallographic properties under varying conditions; also, a new, easy-to-read chemical and physical properties chart, with pertinent illustrated information on Revere manufactured forms and welding technique. A complimentary copy sent you upon request. Address: Executive Offices.

REVERE
COPPER AND BRASS INCORPORATED
Founded by Paul Revere in 1801
Executive Offices: 230 Park Ave., New York 17, N. Y.

McCarran Triggers Third CAL-Revision Bill; AA-AEA Move Jells "Competition" Drive

Form Feeder Association . . . CAA starts Airport Survey . . . Airmail remains problem . . . Ryan files for six feeders . . . Busmen plan air service

Sen. Pat McCarran (D. Nev.) has introduced a third bill in Congress to revise the civil air law of 1938. The other two are the Lea bill, introduced over a year ago, reported to the House Interstate and Foreign Commerce Committee, and withheld from House debate by the House Rules Committee; and the Reece bill, representing the minority opinion of the Commerce Committee, which was not reported.

McCarran's bill covers overseas air transport as well as domestic, providing for a billion-dollar American foreign service corporation in which any or all certificated operators could participate, a set-up arranged so no single one could get control. It would abolish the Civil Aeronautics Board and also the Civil Aeronautics Administration, creating instead a seven-man Civil Aeronautics Authority with an Executive Officer to carry out its orders.

An independent Air Safety Board would be established to investigate all civil air accidents. States would control intrastate carriers and contractors; "experimental" certificates would be issued to advance feeder service; a "bill of rights" would be provided for private flying; and a new national airport survey would be authorized.

Export Merger Would Create "Double Action" Service

In the wake of the initial announcement (page 202 Apr. AVIATION) that American Airlines has moved to purchase a controlling interest in American Export Airlines, there has come a growing understanding that this development is a very confident—and decided—step toward a competitive U. S. overseas air system. That is, a system definitely opposed to a single-management corporation.

As this was written, there was no apparent reason why CAB would not approve the merger, even though it is granted that the deal might conceivably be knocked out if Congress should legislate in favor of airline participation in a "chosen instrument" management.

American Airlines would acquire Export's permanent New York-Lisbon certificate, which is not now in use because Portugal is non-belligerent and because Pan American has exclusive landing rights there. American would acquire also the temporary certificate (expected to be converted to permanent) on which Export is operating New York-England and New York-Africa via South America.

For Export, the merger would be a complete answer to CAB's order that the company divorce itself from its parent company, American Export Lines (steamships) in accordance with the law. American Airlines would get 120,000 shares, a controlling 51.4 percent of Export's common stock, for $3,000,000, leaving Export steamship 46,000 shares, a minority interest to which the Civil Aeronautics Board does not object.

Export has applied for routes to South Africa via South America and from Natal, Brazil, through the Mediterranean to Bombay, India. American, largest domestic air system, also serving Canada and Mexico, has applications pending for lines from Chicago, Detroit, New York, and Boston to London. The alliance, which would link this biggest of domestic operators with the only competitor of Pan American, would create the first "double-action" domestic-overseas service.

Form Feeder Association

Feeder Airlines Assn. is a new organization formed at Washington, D. C., to include both present operators and new applicants for air pick-up and feeder air routes. Sixteen companies were represented at the meeting which launched the new body. Named was an acting organization committee, with Harry R. Stringer, vice president of All American Aviation, as chairman. Headquarters were opened at 1029 Vermont Ave., Washington.

Airmail Remains Problem

Aspects of the airmail rate increase from 6 to 8c., combined with a growing percentage of delayed service, found Postmaster Gen. Frank Walker and Airmail Superintendent Roy Martin touring the country, seeking some answer to the problem-packed situation. Public complaint is increasing. Army long ago advised P.O. to install a priority system to handle important mail first. Post office seems to feel that such a step would be an admission the service cannot function normally. The airlines say they will fly all the mail if they are given enough airplanes.

Thompson on Airport Survey

CAA's newly established Airport Building Design unit has now gone into action, with Marc Thompson, its head, currently touring the country to study design trends and requirements. Facilities and space requirements will be accented in the long-range approach, which will include consideration of administrative buildings for future private-flying ports as well as terminal needs for air carrier operations.

Thompson's study is part of a three-phase CAA plan. A CAA unit to compile data on management methods, intended to take airports "out of the red," was formed earlier, with J. Kirk Baldwin as chief. And in the near future, CAA expects to form a third unit to consider the place of airports in integrated community planning.

Ryan Files for Six Feeders

If the new application by Ryan School of Aeronautics for six feeder and pick-up airline routes is approved by the CAB, more than 100 California cities will be added to the list of communities served by air transport facilities.

Routes solicited are Los Angeles-San Diego, Los Angeles-Yuma, San Francisco-Los Angeles, San Francisco-Bakersfield, San Francisco-Redding, and San Francisco-Eureka. Over the total of 2,100 route miles, Ryan proposes to fly 5,400 mi. daily, employing twin-engine craft equipped with pick-up devices to service communities lying between the regular passenger stops.

Busmen Plan Air Service

Announcement also came that the newly incorporated Dayton & Western Ohio Airlines, headquartering at Dayton, Ohio, would file for a new system of feeder lines to serve 19 Ohio and Indiana cities, at least 11 of which do not now enjoy such facilities. The company, formed by three interurban bus outfits, plans use of both conventional aircraft and helicopters. Operation would be between Cincinnati, Dayton, Columbus, Toledo, Lima, and Portsmouth in Ohio and Richmond in Indiana.

Company board chairman is Walter A. Draper, president of Ohio Bus Lines and the Cincinnati Street Railway Co.; and company president is William L. Butler, president of the Cincinnati & Lake Erie Transportation Co.

. . . And We Quote

"The airlines are suffering badly from lack of planes and cannot get from the Administration any information as to even a plan for returning the airplanes seized on presidential order. This is hard to understand, since the production of this type of airplane is high and the diversion of factory deliveries of this type of plane for only one day would do much to speed the war work of the domestic airlines in the large priority loads they carry."—Ralph S. Damon, vice-president and general manager, American Airlines.

"The day of transport airplane standardization, as we have known it for the past seven years with the Douglas DC-3, is over, for as we [the airlines] grow we must provide a public service ranging from local passenger service operations to long-range passenger service, as well as air cargo facilities to the shipper of merchandise requiring speed of movement."—Charles Froesch, chief engineer, Eastern Airlines.

"Surplus plant and surplus war goods may even be considered in the nature of similar goods already expended in war. They are public property and should be administered in the public interest. The public interest demands a high level of employment. Forced liquidation of these items, as if they were commercial assets, with the idea of applying the recovery to reduce the public debt, would produce but a small percentage of the original cost. This return could hardly begin to approach the outlay for relief which would inevitably result from unemployment produced by disarranging the economy. If, however, we have clear recognition of these principles and courageous administration, we can emerge with a strong nucleus of an aircraft industry derived from those companies which have performed best in the war effort, particularly along technological lines."—Eugene E. Wilson, vice-chairman, United Aircraft Corp.

"It would be a serious mistake to suppose that we could put off all thought of postwar problems until the day the shooting stops. Actually, right now we are getting a foretaste of postwar conditions."—Tom Girdler, chairman, Consolidated Vultee Aircraft Corp.

"The airport of the future will be a community in itself, offering an opportunity for design on the grand scale. Wise planning and control of its development will enable every community to achieve a unified, simplied group of buildings from a small beginning."—Albert F. Heino, United Air Lines architect.

★ CROSS COUNTRY ★

Combined rail-air express shipments for January totaled 38,257, up 32.8 percent over 28,810 in Jan., 1943, according to REA.

Penn-Central carried 831,578 lb. of mail in January and February, a gain of more than 37 percent over 604,004 lb. moved in same period of last year. Express moved in same period totalled 626,433 lb., against 403,272 a year ago.

TWA made 3,159 trans-ocean flights during first two years of over-water operations for ATC, of which 1,647 were across North and South Atlantic. All flights were made in Douglas C-54's and Boeing 307 "Stratoliners." Mileage totaled 12,894,467; current operations cover over a 1,000,000 mi. a month.

United Air Lines flew 28,722,500 revenue passenger miles in February, up 29 percent over 22,255,444 in February of last year. Airplane miles flown totaled 1,921,140 against 1,570,522.

Hawthorne Flying Service has taken a 5-yr. lease on municipal airport at Rocky Mount, N. C. This first Hawthorne venture in North Carolina will be managed by Lee B. Borie, now flight instructor at Hawthorne's Columbia, S. C., Navy-WTS school.

Panagra has converted to all-cargo service one of three new DC-3's just alloted it; craft will supplement two DC-2's now used on the Balboa-Buenos Aires route.

Pan American Airways has purchased minority interest in Bahama Airways, planning regular schedules to all principal Bahaman islands after the war, tieing in with Nassau-Miami run.

American, Braniff, Chicago & Southern, Eastern, Pan American, Penn-Central, TWA, and United recently cooperated in striking "food flight." From four countries and five southern states they transported—in 6 to 30 hr.— tree- and vine-ripened fruits and vegetables to Detroit luncheon sponsored by Wayne University under E. S. Evans Grant for Air Cargo Research.

Penn-Central has asked to withdraw from CAB its application for routes into Caribbean, Central and South American areas, giving as reason its conclusion "that the national interest no longer required that PCA prosecute this particular application." Company will, however, continue seeking additional domestic routes.

Purchase of Mayflower Airlines by Northeast Airlines, announced last year and the subject of a public hearing this January, has been recommended for approval by CAB Examiner Frank A. Law. Okay by the board will bring routes between Boston and Provincetown, Hyannis, Oak Bluffs, and Nantucket under the NA banner.

National Committee for the Development of Aviation has been launched in Cuba to foster civil aviation. Plans are underway to build a system of municipal airfields.

More than 500 airfields have been made ready in Britain, a five-fold increase in five years.

Installation of six long-wave radio stations over the North Atlantic route has eliminated magnetic disturbances and speeded ferrying of planes to Britain.

Removal of "war paint" on Douglas C-54 "Skymasters" saves 200 lb. in weight and adds 7 mph. to normal 222-mph. cruising speed.

PROCEEDINGS—THE FIRST NATIONAL CLINIC OF DOMESTIC AVIATION PLANNING. Oklahoma City Chamber of Commerce. 277 pages.

Addresses reprinted from Oklahoma City meeting held last November include the Domestic Air Pattern for Tomorrow, Harllee Branch; Future Pattern and Policy of Ground Facilities, W. A. M. Burden; A Suggested Pattern for Domestic Aviation, Col. E. S. Gorrell; Postwar Disposal of Surplus Aircraft, W. W. Parrish; Air Cargo Expectancy, C. P. Graddick; The Primary Transport—Local and Feeder Service, Gov. M. M. Neely and C. E. Leasure; The Personal Aircraft, J. T. Geuting Jr.; Renegotiation and Termination of War Contracts, F. A. Callery; Peacetime Plans for Wartime Plants, Rep. M. J. Maas and Rep. Jennings Randolph; Fixed Base Operation, Roscoe Turner and D. M. Steele; Technical Aviation Training, Assen Jordanoff and M. W. Balfour; The Further Vistas, G. R. Wilson; Education for the Air Age, F. G. Brewer, Drs. Bruce Uthus, F. W. Hart, and A. C. Willard; and The Helicopter, W. B. Stout.

GAS TURBINES AND JET PROPULSION FOR AIRCRAFT, by G. Geoffrey Smith. Aerosphere, New York City. 79 pages, illustrations, $1.50.

In the turbulent wake of speculation following announcement of military use of jet propulsion, this short book combines a wealth of j-p information. It is a reprinting of a series of articles which appeared in the British magazine "Flight" in Aug. 1941, and later.

"It is necessary," writes Mr. Smith (who is managing editor of "Flight" and of "Aircraft Production") "to distinguish clearly between two forms of jet propulsion. In one the thermodynamic unit is a vessel containing a combustible mixture which in itself embodies the oxygen necessary for combustion and is thus independent of the atmosphere. The combustion gases escape by a nozzle to form a propulsive jet. This is the rocket principle. In the other the thermodynamic plant uses a liquid or solid fuel that requires to be fed with oxygen from the atmosphere for combustion. This is the thermal jet system with which we are concerned . . . In the view of the author, combustion gas turbines hold great promise as a propulsive unit for aircraft of the future.

Mr. Smith's chapters consider rotary or reciprocating compressors, influence of jet upon aircraft design, potential advantages of jets, the Caproni-Campini plane, steam turbines, and types and possibilities of gas turbines.

THE ARMY READER, edited by Lt. Col. Karl Detzer. Bobbs-Merrill Co., New York. 469 pages, illustrations, $4.

This is the "anatomy book" of the army, a vast survey of machines and men trained in specialized tasks to be controlled as a formidable unit. A whole section is devoted to the air forces, with articles on and by Gen. Arnold, by Lt. Gen. Yount, Brig. Gen. Sorenson, and Lt. Col. Silsbee.

The specialties in the army itself have obliged Col. Detzer to chop the book up into little pieces, each dealing with one small subject. Practically all the material has been reprinted from magazine articles and thus, in the tremendous struggle for instantaneous progress, some of the information is of phases that may no longer be representative.

THE HELICOPTERS ARE COMING, by C. B. F. Macauley. Whittlesey House, New York. 165 pages, illustrations, appendix, $2.00.

Popularly slanted for the man-in-the-street (foreseen, one day, as becoming the man-in-the-air) Mr. Macauley's book aims to answer "the questions in the minds of everyone regarding the highly controversial subject of the helicopter's future" and to "help stimulate interest in the many ways the helicopter can surely serve us in recreation, travel, and daily work as it comes of age in the years ahead.

Following the various generic definitions of the craft, the many revealing incidents of the Sikorsky XR-4's memorable initial cross-country flight to Wright Field are recounted. Then, in turn, come a historical review tracing development of the helicopter, a discussion of its use and prospects in war, and an outline of commercial possibilities. Finally, in chapters titled, "The Helicopter and You," and "Social Impact," the author offers his forecasts in prospective perspective—of tomorrow's family "helicar" activity and its consequent effect upon our manner of living. The appendix lists organizations already engaged in, or contributing to, helicopter development. Highlighting the book are numerous amusing "helicartoons."

QUICKIE SNIPPIE

Lockheed needed rotary shears in a hurry; AAF said they could have them. Douglas C-47 picked up two units, each weighing 2,000 lb., at Whiting Corp. plant in Harvey, Ill., flew them overnight to Burbank. Within 24-hr. of their completion, shears were operating in Lockheed plant.

ILLUSTRATED TECHNICAL DICTIONARY, edited by Maxim Newmark. The Philosophical Library, New York. 352 pages, illustrations, $5.

"The plan of this dictionary is to supply a wide and representative selection of officially approved, standard definitions promulgated by various United States engineering, technical, trade and industrial organizations, as well as by government agencies." Primarily intended for engineering, technical, and trade libraries.

AIRPLANE DESIGN, by Karl D. Wood. Published by author at Purdue University, Lafayette, Ind. 2nd edition. Index.

A textbook of airplane layout and stress analysis. Mr. Wood is a professor of aeronautical engineering and a consulting aeronautical engineer.

FUNDAMENTALS FOR THE AIRCRAFT MECHANIC, by James M. Markley. McGraw-Hill Book Co., New York. 345 pages, appendix, illustrations, index, $4.

Designed to give a basic knowledge of aircraft, this text is for employment in conjunction with laboratory courses in the use and care of hand tools. Also recommended are experiments in the subjects being taught. Fundamentals of sketching, blueprint reading, and shop mathematics are included.

BASIC AIRCRAFT INSTRUCTION, by Ross A. Peterson and Raymond E. Erickson. Prentice-Hall, Inc., New York. 204 pages, appendix, illustrations, index, $2.50.

Detailed explanations, in non-technical language, of various operations in the manufacture of all types of airplanes.

AIRPLANE PERFORMANCE AND OPERATION, by R. Dixon Speas. McGraw-Hill Book Co., New York. 121 pages, illustrations, index, $1.50.

Flight crew instruction in the various technical factors affecting airplane performance and operation, with explanations of graphic and tabular forms of presenting performance charts. "This manual should prove as valuable for pilots seeking the means of self-instruction as for use as a text in the organized training of new transport pilots," states Dr. Edward P. Warner, Civil Aeronautics Board. Drawings of gremlins add an amusing touch to book.

TOMORROW WE FLY, by William B. Stout and Franklin M. Reck. Thomas Y. Crowell Co., New York. 160 pages, photographs, $2.

Discussion of commercial and private aircraft probabilities for the future. Facts and figures bolster the authors' contention that postwar transportation will increasingly take to the air.

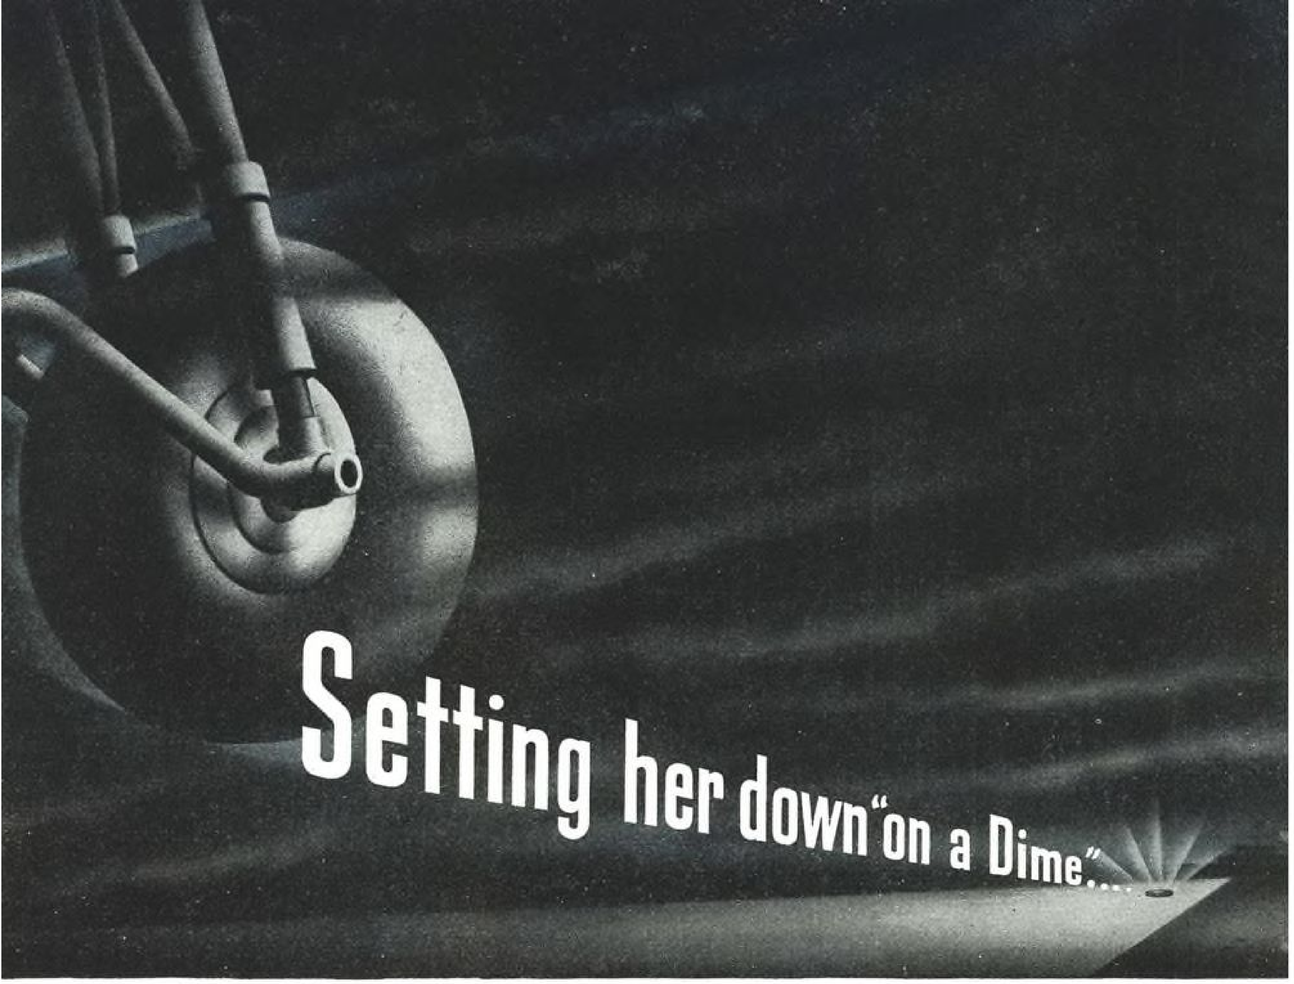

Federal's Instrument Landing System is Ready to Serve the Great New Air Age

Federal's Instrument Landing Systems are equipped with Intelin Coaxial Cable, also developed and manufactured by Federal. This cable has extreme ruggedness, strength and endurance, and meets all specifications with precision, accuracy, uniformity and dependability.

Through fog, sleet, rain and blackness the science of radio brings the airliner home.

The pilot *knows* his course, position and landing.

Federal's Instrument Landing System guides the homing pilot with unfailing accuracy. He can set his ship down on a dime.

Federal's equipment has made a great contribution to safety in the air. It is dependable and, moreover, is less subject to atmospheric disturbances. It reduces initial, maintenance and operating costs.

Federal—one of the largest manufacturers of instrument landing equipment for ground installations—is prepared now to discuss your plans and probable requirements.

Federal Telephone and Radio Corporation

AN IT&T ASSOCIATE

Newark 1, N. J.

Reports on New British Power Plants and Planes

Brabazon Committee recommends seven craft . . . Vickers and Handley Page craft for postwar . . . Diary of British jetplane

Details are made public on two new British aero engines, the Napier *Sabre II* and the Rolls-Royce *Griffon*. While the *Sabre* has seen action for some time in the Hawker *Typhoon*, the *Griffon* is said to power a new British fighter (called the *Tornado* in some reports, and the *Tempest* in others and built by Hawker in either case). Salient in the 24-cyl. *Sabre II* are two equi-rotating crankshafts with two banks of horizontal cylinders, with the same cylinders in top and bottom banks firing together.

With 2,240 cu.in. displacement, the engine has a 7:1 compression ratio, and is stated to deliver over 2,200 hp. at 3,700 rpm. Its sleeve valves are operated by a special shaft driving cranked gears, and the two-speed supercharger features continuous drive from two torsion rods through an hydraulic clutch. Another interesting feature is the multiple-cartridge engine starter, to enable five starts without reloading.

The *Griffon*, latest in the long line of Rolls engines, has a displacement similar to the *Sabre*. Its horsepower performance, still on the restricted list, is thought to be around 2,100 hp. up to 25,000 ft. The *Griffon* is extremely compact, a feature mainly achieved through use of an external shaft-driven gear box on which all accessories are grouped.

British Committee Recommends Seven New Aircraft

The second Brabazon Committee, dealing with Britain's postwar air plans, has recommended seven new aircraft to assure England's position in the new peace. The types run from an 8-passenger feeder-line plane, through a 14-seat land plane and several larger types, up to the giant 100-ton flying boat reportedly under construction at Bristol as a "spare time" project. The other plans include a jet-propelled passenger plane of unpublicized size, two pressurized land planes, of approximately 70,000- and 100,000-lb. gross weight, and a 30-passenger twin-engined land plane of some 40,000 lb.

Vickers and Handley Page Craft for Postwar

During recent weeks, two new warplane conversions for the immediate postwar period were announced in England—first, the Vickers *Warwick*, a twin-engined monoplane of 45,000 lb. with marked resemblance to the *Wellington* (geodetic construction), powered by 2,000-hp. Pratt & Whitney engines; and second, a new model put out by Handley Page, builder of the *Halifax*, which can carry up to 50 passengers. The latter plane, designed to use as much of the bomber's assemblies as possible, has a circular fuselage suitable for pressurizing. Its cruising speed is reported to be over 200 mph., with a payload of 9,500 lb. at an extreme range of 2,500 mi.

Diary of British Jetplane

To complete the background stories on the jetplane, some dates in its development have been made public. In 1933 final development work on the present type was started, in 1937 the first engine was tested, and in 1939 the first jet-propelled airplanes were ordered by the government from Gloster. The Gloster plane flew initially in May 1941, Gen. Arnold received full information in July, and the first U.S. jetplane flew in Oct. 1942.

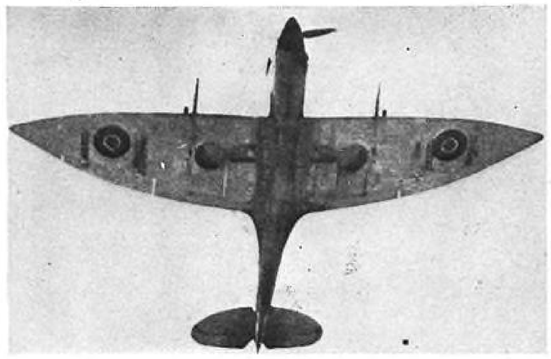

ELONGATED "SPIT"

Latest modification to Supermarine "Spitfire IX" series is pointed wingtip replacing conventional elliptical shape. Newest tips add approximately 4 ft. to original 36 ft. 10 in. span and have been designed for high altitude work, reportedly giving better than 2,000 ft. higher ceiling. Standard armament consists of two 20-mm. cannon and four .303-cal. machine guns. Other "Spitfire" modifications have included clipped wing version to improve performance at lower altitudes.

New Gnome-Rhone Engine

Reports from inside France tell of development of a new multiple-row engine by Gnome-Rhone. A four-row engine with fan-assisted cooling, it is said to develop 3,700 hp. at 20,000 ft. However, the capacity is only 2,900 cu.in., and bore and stroke figures give the engine only 20 cyl., or four tandem-placed 5-cyl. engines. Until more complete reports are received, data on this engine must be considered questionable.

ON SCHEDULE . . . . . By "VISTA"

In London, recent U. S.-Britain meetings have aimed to range the field of postwar commercial aviation. And at press time, two results appeared to have been attained—an agreement that the Axis nations will not be permitted to operate commercial airlines for some time after the war (as predicted earlier by AVIATION), and a growing understanding that a satisfactory arrangement can only be expected through America and Britain meeting each other half way. A prelude to full United Nations' conferences late this year or early in '45, these talks found high British officials, including Lord Beaverbrook, discussing the air transport approaches with U. S. representatives Adolph Berle, Jr., of the State Department and Edward P. Warner of the CAB.

The preliminaries give some idea where the main argument will lie when all nations tackle the problems. Indications point to a limited "freedom of the air" policy along with certain restrictions on cut-throat competition through government subsidies, with overall control through an international body patterned after the I.A.T.A. At least an attempt is being made to arrive at some kind of agreeable set-up which will not damage national prestiges in the postwar commercial aviation field.

Some quarters feel that the several new British airliners now receiving publicity are being offered as "answers" to craft being developed on this side of the Atlantic. The plane outlined by the Brabazon committee (see accompanying story) can generally be considered as replying to such planes as the Douglas DC-7 of 150,000 lb., Consolidated's new Model 39 of 60,000 lb. and Model C-99 for 400 passengers, and Boeing's C-97, which according to British reports represents the commercial counterpart of the *Superfortress*.

★INTERNATIONAL BRIEFS★

Postwar plans for Sweden's ABA call for extensions to Lisbon, Vienna, Scotland via Oslo, and Warsaw via Danzig.

The Germans are now using the Do-217M1 with DB-605 engines.

Hitler's reputedly "super" dive-bomber turned out to be the Heinkel He-219. Meantime this craft has been converted into a nightfighter—to meet current urgent needs.

A new model "Lancaster" is now in operation. Known as the Mark III, it has Merlin 28 engines and a new-type bombardier's window.

The "Daily Mail" reports "secret tests" in many British factories with "family" helicopters for postwar use.

Issued by Britain's Civil Aviation Dept. is a booklet setting forth a new principle to determine proper length for runways, together with new rules for unobstructed approaches (called "flightways") to new airports.

A BOAC "York" has made survey flights along the West African coast in connection with possible Latin American plans.

Ansett Airways, now operating in Australia, is reported ready to open service to the United States.

United Aircraft Corp. reports sales of $733,590,668 in 1943, an increase of 41 percent over sales of $518,970,578 in 1942, while net earnings were $15,396,114 or $5.30 a common share against $17,096,841 or $5.95 a sare in 1942. Renegotiation of 1943 profits is not anticipated. Postwar reserves of $28,004,464 have been set up, including $4,107,193 charged to 1943 operations. Company shipments plus those of licensees and associated producers totaled nearly $2,000,000,000 last year. Net profit on sales was 1.6 percent, while current assets at the year-end were $206,050,684 against current liabilities of $120,711,245.

Northwest Airlines' new financing consists of 117,460 shares of stock, with shareholders offered one new share at $16 for each share held. This will give Northwest 352,380 shares outstanding out of an authorized issue of 600,000.

Douglas Aircraft Co. reports sales of $987,687,196 in 1943 against $489,781,984 in 1942. And net profit is put at $5,952,257 or $9.92 a share against $9,229,620 or $15.38 a share in 1942. Current assets were $163,464,275 against current liabilities of $128,025,548. No further renegotiation adjustments are anticipated, since contracts were of the fixed-fee type. A contingency reserve of $6,950,000 was set aside.

Glenn L. Martin Co. reports sales of $632,163,870 in 1943 against $337,556,000 in 1942, with net profit gaining to $12,437,583 or $11.15 a share from $6,658,809 or $6.01 a share in 1942. Last year's earnings are subject to renegotiation. A contingency reserve of $3,000,000 in 1942, pointed out Pres. Martin, was augmented by an additional $7,000,000 in 1943.

American Airlines, requesting CAB authority to purchase a 60 percent control of American Export Airlines, would pay $25 a share for 120,000 shares of the latter's treasury stock, or $3,000,000. American Airlines net profits in 1943 were $3,192,969 or $5.18 a share against $3,851,714 or $6.33 a share in 1942.

Dividends: With the declaration of a 50c. dividend by Lockheed Aircraft Corp., Pres. Robert Gross said that "the more Lockheed's experience in its war work broadens, the more apparent it is that the company's margin of profit probably will be less than in the past. This and other factors must be taken into consideration in determining future dividends." . . . McDonnell Aircraft Corp. paid a $1.50 dividend per share on Apr. 1 . . . Boeing disbursed $1 a share on Apr. 19 . . . Airplane Manufacture & Supply Co. paid 5c. a share on Apr. 30, while Consolidated Vultee will pay 50c. a common share on May 15.

Bell Aircraft reports net profit of $2,462,414 or $6.24 a share in 1943 against $1,711,583 or $4.80 a share in 1942. Sales were $232,134,000 against $121,863,227. A contingency reserve of $600,000 was established in 1943 compared with one of $1,200,000 in 1942.

Airline profits: United Air Lines reports net profits of $3,203,276 or $2.13 a share in 1943 against $2,134,356 in 1942 . . . Eastern Airlines reported $1,426,859 or $2.42 a share against $3,535,503 or $5.99 a share in 1942. An excess profits tax liability of $3,150,000 last year was mainly responsible for the drop in earnings. . . . Western Air Lines reported net profit of $90,194 in 1943 or 22c. a share against $693,703 or $1.69 a share in 1942 . . . Braniff Airways reports net profits of $611,000 or 61c. a share in 1943 against net profit of $512,882 in 1942.

Loans: Beech Aircraft Corp. has arranged a 30-month revolving credit of $50,000,000 with 36 banks. Under the arrangement, the government guarantees repayment of 90 percent of the loan. Funds may be obtained for use in war production or in event of cancellation of war contracts . . . Kellett Aircraft Corp. has negotiated a $2,000,000 V-loan for use in financing or terminating war contracts, according to Pres. W. Wallace Kellett. The new loan supercedes a $1,250,000 earlier credit . . . Douglas Aircraft reported bank loans of $12,000,000 in its Nov. 30, 1943 balance sheet, these loans being obtained from a $40,000,000 line of bank credit previously extended to the company.

Kellett Aircraft Corp. reports sales of $11,297,106 in 1943 compared with $5,267,170 in 1942, a gain of 114 percent. Net earnings were $48,739 or 11c. a share last year. Postwar reserves increased from $49,802 to $200,000 at the year-end.

Postwar Plans: Republic Aviation expects to broaden its postwar activities to the fields of commercial transportation and private flying, according to the annual report . . . Douglas Aircraft has four new products of "exceptional performance and promise under development." . . . Glenn L. Martin Co. expects to market "Marvinol", a chem-elastic plastic with the characteristics of rubber.

Square D Co. reports sales of $45,710,433 in 1943 against $34,300,202 in 1942.

Bellanca Aircraft Corp. reports sales of $6,222,492 last year compared with $3,855,072 in 1942.

ADDING IT UP . . . . By RAY HOADLEY

Man bites dog. Aircraft officials have been pessimistic so long regarding peacetime reconversion that it almost bordered on the sensational when Alfred Marchev, president of Republic, flatly said the other day that he didn't believe the readjustment period would be nearly as disastrous as it had been painted by some of the industry leaders. That's the view we have taken the last few months ourselves, hence we're mighty glad to have Mr. Marchev, also a few others like Fred Robinson of National Aviation, set forth similar views.

Long term planning. The Republic executive looks for a substantial military market after the war. Some of the military folk speaking off the record, have not been as optimistic. But we think aircraft investors can interpret the appointment of Rep. Clifton Woodrum of Virginia, to head the House postwar military policy planning, as a good omen for the future. As early as 1927, Woodrum was a strong advocate of "steady, orderly, and progressive strengthening" of Uncle Sam's air arm. Many others on his committee are supporters of an adequate peacetime air force. Some Air Force officers fear post-World War I aviation history will repeat itself. We don't think so.

Congress fumbles the ball. The first stage of after-war adjustment planning was successfully passed when Messrs. Baruch and Hancock issued a report that was acceptable to both industry and government officials—no small achievement. But since the ball was handed to Congress to translate the report into action little has happened. More than 25 bills on some phase of the matter have been dropped into the hopper, yet sentiment has not crystallized into an acceptable pattern, indeed several Congressional committees were still holding hearings as this was written. The George-Murray bill looks like the best bet for a starting point, but Congress will have to step on the gas if a completed bill is to be passed before the fall election.

Dismissal wage. Aircraft officials are glad this ticklish matter has come out in the open through a proposal in Congress to give two weeks pay to dismissed war workers upon termination. It's definitely a problem for the government, since aircraft concerns don't have the financial resources to cope with this situation. But spokesmen for the industry hope it will be considered as separate legislation rather than as an attachment to the main postwar adjustment bill, which would cause more delay.

A billion-dollar airline. Granted that we toss money around pretty freely these days, that billion dollar international airline proposal of Senator McCarran's looks super-colossal. It would mean that this "chosen instrument," picked to represent the United States abroad, would have seven times the capital of all our present commercial aviation companies. We wonder if the Senator wouldn't settle for a capitalization of, say, $500,000,000. Even then the government would have to put up most of the money.

Airline merger implications. When American Airlines recently took the bull by the horns and announced moves to acquire working control of American Export Airlines, a domestic air carrier thus got a foot in the door of transocean air commerce for the first time. Wall Street now looks for United Air Lines to make some sort of working agreement with Pan American Airways in order to offset this strategic American move.

Aviation People

ALFRED B. BENNETT, noted aviation expert, flyer, and executive becomes director of post war sales for Aeronca Aircraft Corp. He was one of the foremost merchandisers of civilian aircraft before the war.

HARLAN P. HALLOCK has been appointed traffic supervisor in New York City for American Airlines. In his new post he will have supervision over representatives of passenger traffic, cargo, and publicity.

MARC THOMPSON, head of newly established CAA Airport Building Design Unit (see Transport News) is on a nationwide tour to gather information about present and future airport building trends. (CAA photo.)

SHEPARD DUDLEY has been named president of the newly formed Intava, Inc., formed by Standard Oil of N. J. and Socony-Vacuum to provide complete aviation service to U. S. airlines in their operations abroad.

ARTHUR FORISTALL, formerly director of public relations at Consolidated Vultee's San Diego division, has returned to duties at the N.Y.C. office of Hill & Knowlton, public relations counsel for the company.

WILLIAM A. M. BURDEN, new Assistant Secretary of Commerce, has been named Surplus Property Administrator. Mr. Burden originally entered Department of Commerce service in 1942 as special assistant to the Secretary of Commerce.

DR. STEVEN E. MAUTNER has been appointed executive vice-president and chief engineer of Skydyne, Inc. A pioneer in the sandwich type of monocoque construction, he worked with famous French designers before coming to the U. S.

COASTAS "GUS" PAPPAS, Republic Aviation engineer, was awarded the Wright Brothers Medal by the Society of Aeronautical Engineers for his presentation of the best paper on aerodynamics and structural research during 1943.

FREDERICK P. CULBERT, former American vice-consul at Casablanca and long-time French representative for UAC, was named general manager of Al-Fin Corp., was one time chief pilot at Navy lighter - than - air school. (Tommy Weber, photo.)

MILO G. BURCHAM, ranking test pilot and pioneer in high-altitude flight research, was named chief pilot, chge flight operations, Lockheed Aircraft Corp., will direct the test pilots and continue certain of his own test flying activities.

W. M. "BILL" MORGAN has been named special representative in Oklahoma for Braniff Airways. After serving on the aviation committee of the Oklahoma Chamber of Commerce for many years, he is now chairman of that committee.

HOWARD W. CHENEY, former Lockheed Aircraft Corp. advertising and sales promotion manager, has been named assistant to Pres. R. S. Macmillan, of Macmillan Petroleum Corp., will be responsible for advertising and merchandising.

JOHN R. CONRAD is manager of the new properties division for Douglas Aircraft's Long Beach plant. Believed to be the first of its kind in the aircraft industry, the division is thus headed by one of the youngest executives in aviation.

MALCOLM Y. McCORMICK joined CAA's Medical Division to make an analysis of half million records of medical examinations of airplane pilots. A graduate in psychology of University of Maine he obtained his master's degree at N.Y.U.

CARL O. SAMUELSON has been appointed contracts manager of the Ranger Aircraft Engine Div., Fairchild Engine & Airplane Corp. Before joining Ranger, he was contracts manager for Lycoming Div. of The Aviation Corp.

Now is the time to think about Molybdenum...

Taylor and White's great discovery which made possible high speed cutting was the greatest single development to help make mass production possible. The steel developed, commonly known as 18-4-1, served industry faithfully for over thirty years without a serious competitor.

In the early 1930's the first molybdenum high speed steels were used on a substantial commercial basis and, before the Second World War, about 25% of all tungsten high speed steels had already been replaced by molybdenum high speed steels on merit. This steady progress of logical replacement of the tungsten steels was interrupted by the war because of the tungsten shortage, when many industrial plants were forced to a sudden change to molybdenum steels.

Because of the stress of war production many concerns have never had an opportunity to satisfy themselves thoroughly as to the comparative merits of the molybdenum high speed steels. For those, in this category, who are inclined to return to the tungsten steels, we suggest a serious consideration of the following facts—molybdenum high speed steels perform as well as, or better than, tungsten steels—and they cost less.

CLIMAX FURNISHES AUTHORITATIVE ENGINEERING DATA ON MOLYBDENUM APPLICATIONS.

MOLYBDIC OXIDE, BRIQUETTED OR CANNED • FERROMOLYBDENUM • "CALCIUM MOLYBDATE"

Climax Molybdenum Company

500 Fifth Avenue · New York City

KEEP POSTED ON

Products and Practices

This selected information on new publications and products is offered by the "AVIATION" Reader's Service through cooperation with the manufacturers. It helps executives save valuable time, provides profit through convenience. To obtain literature or additional data on new products described, simply fill in form below, clip it to your letterhead, and mail. There is no cost, no obligation.

ENGINEERING DATA

Lubricating Oil Tests.....1

Sinclair Refining Co., New York, offers 44-page booklet *Aircraft Engine Lubrication*, containing new altitude engine-performance chart showing problems of pressure, temperatures, and power loss requiring solution. Included are full-color charts of lubrication systems of aircraft engines.

Junction Boxes, Assemblies.....2

Released by Union Aircraft Products Corp., New York, is booklet *Quality Standards for Aluminum Junction Boxes & Assemblies.*

X-Ray Protection 3

Offered by Bar-Ray Products are blueprint, architectural drawings, specifications, and other information on building of X-ray rooms and departments, with special reference to protection of operators. Catalog deals with firm's lead products.

Fire Protection System.....4

How new "alneumatic" system for protection of aircraft in flight has been developed for use on larger and longer-range multi-engined planes of today and tomorrow is described and pictured in detail in brochure titled, *The Fire Extinguisher Takes Wings*, published by American-La-France-Foamite Corp., Elmira, N. Y.

Decimal Equivalent Charts.....5

Dayton Rogers Mfg. Co., Minneapolis, announces free distribution to engineering departments of framed decimal-equivalent charts with 13 x 18-in. glass protected table.

Flange Packings 6

Packings Pointers, edition No. 4, from Graton & Knight, Worcester, Mass., diagramatically illustrates uses, lists design features, and reviews case studies of flange packing.

Power of Research 7

B. F. Goodrich Co., Akron, offers reprint of a speech by Dr. Howard E. Fritz before Technology Club of Syracuse. Titled *The Power of American Research*, it points out growing importance of research in industry.

Fire Extinguishing 8

Booklet from Cardo Corp., Chicago, illustrates how five fire-hazard requirements are met in a single system. Included are typical performance data.

Adhesives 9

To meet aircraft requirements, more than 700 adhesives and sealers have been developed by Minnesota Mining & Mfg. Co., Detroit. Certain of these are described in new booklet, *3-M Adhesives in the Aircraft Industry*, which includes project sheets on which your problems may be listed and sent in. A second manual, *Scotch Adhesive Tapes*, is profusely illustrated and includes samples.

PRODUCTION

Induction Heating 10

Results With Tocco, publication issued by Ohio Crankshaft Co., Cleveland, is collection of case histories illustrating Tocco process and machines.

Piston Ring Rust.....11

Stating that air conditioning reduces rust to a minor problem in piston ring manufacturing, Carrier Corp., Syracuse, N. Y., offers advice and information.

New Packaging Material.....12

Goodyear Rubber Co., Akron, announces V-Film, a new packaging material with base of plastic resin. Though not a substitute for company's Pliofilm, it is an alternative in some applications. And though not equal of Pliofilm in some respects for moistureproof packings, it is stated to be superior in tear resistance and certain other factors.

Fastener Catalog 13

Catalog F, covering cap screws, set screws, aircraft bolts, nuts, etc., is announced by Cleveland Cap Screw Co., Cleveland.

Hole Punching 14

New catalog *PS* from Wales-Strippit Corp., N. Tonawanda, N. Y., illustrates and describes full line of plate sets, punch assemblies and dies, feed carriages and accessories.

Carbide Tools 15

Standard carbide tools and blanks are described in detail in new catalog from Kennametal, Inc., Latrobe, Pa.

V-Belts 16

B. F. Goodrich Co., Akron, introduces a wire grommet V-belt in a new folder. Belts are stated to have high tensile strength, high resiliency to resist shock, and to allow an increase in horsepower ratings.

Grinding Practice 17

Booklet of illustrations and text from Blanchard Machine Co., Cambridge, Mass., shows actual jobs on firm's grinders. Details concern material, stock dimensions, limits, quantity per hour, etc. Title is *Work Done On the Blanchard.*

Carbide Tipped Cutters.....18

Bulletin GT-17J from Carboloy Co., Detroit, details high speed milling of steel with carbide tipped cutters, and tells how, when required, a special cutter may be designed.

New Gage Catalog 19

Information on gaging practice and tables and charts on threads, etc., are found in new catalog issued by Republic Gage Co., Detroit.

Wirebound Boxes 20

From General Box Co., Chicago, comes manual of instruction on efficient handling of wirebound boxes.

Materials Handling Trucks.....21

Illustrations and information on "how" of materials handling, storing, etc., have been issued by Industrial Truck Statistical Assn., Chicago. Title of publication is *Unit Loads — Their Handling — Shipment —Storage.*

MACHINERY & ACCESSORIES

Electric Hand Tools.....22

Facts & Figures, booklet from Precise Products Co., Racine, Wis., describes high speed electric hand tools and what they do. Particularly treated are outstanding features of Precise 35, speed tool operating at 35,000 rpm.

Polishing Lathe 23

Engineering and data bulletin is now ready on magnetic polishing lathe offered by Lima Electric Motor Co. Detailed are principles and method of operation to show application of magnetic chuck as well as use of several types of face plate.

AVIATION READER'S SERVICE

MAY

AVIATION, 330 W. 42nd St., New York City

Please send me additional information according to key numbers circled.

INFORMATION TIPS: 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32

NEW PRODUCTS: 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92

NAME..... TITLE.....

FIRM OR AFFILIATION.....

ADDRESS .....

AIRCRAFT

Aircraft Overhaul 24

Freed of some of its government work, Embry-Riddle Co., Miami, offers overhaul facilities to civilians. Pamphlet describes company departments: Engines, propellers, instruments, radio, parachutes, special projects, etc.

ELECTRICAL

Transformers 25

New method of attaching transformer cases designed to eliminate strain on solder seal has been developed by Thermador Elec. Mfg. Co., Los Angeles. Company states transformers are specially able to withstand shock and immersion.

Solderless Wiring Devices.....26

Large reference manual—*Catalog SD-1*—issued by Aircraft-Marine Products, Harrisburg, Pa., includes illustrated data on company's line of solderless insulation support terminals, standard and flag type terminals, connectors, lighting contacts, cable lugs, wiring plugs, standing and quick disconnect bonding jumpers, splicing terminals, grid clips, etc. Hand tools and installation presses are described, and there are instructions for setting up crimping dies. Data, specification, and dimensional charts on Army, Navy, and commercial wire sizes are given, and there are wire reference data.

Insulating Varnishes.....27

Sterling Varnish Co., Haysville, Pa., has published *Bulletin 243* concerning "Speedairbonds", air-drying varnishes for electrical insulation industry. Maker states features are fast drying; smooth and glossy finish; resistance to oil water, acids, and alkalis; and high dielectric qualities.

Current Interruptor 28

Bulletin 201-A issued by Sciaky Bros., Chicago, describes Dynatrol, new device for high speed, arc-less current interruption of inductive d.c. circuits, designed to replace magnetic contactors formerly used on resistance welders of electro-magnetic stored-energy type. Unit is available on all Sciaky welders up to and including 50 kw.

MANAGEMENT & EMPLOYEES

Valve Chart 29

For shop training or for a refresher on valves, new valve selection chart is offered by Reading-Pratt & Cady, Bridgeport, Conn. Of cardboard, chart explains conditions to consider when selecting a valve, also describes how these conditions affect operation of a valve.

Service Film 30

New training film *Installation, Maintenance & Service of Aircraft Pistons and Rings*, is offered no-charge for 10-day period by Ramsey Accessories Mfg. Corp., St. Louis. Film was produced at Wright Field by AAF technicians.

Fastener Stock Record.....31

In folder form, periodical record of various types and sizes of "in-stock" fasteners is offered by Manufacturers Screw Products, Co., Chicago. Among items treated are screws, washers, rivets, studs, nuts, and bolts.

Rubber in War.....32

Eighty-page color booklet published by Rubber Manufacturers Assn., New York, illustrates and describes articles in which rubber is used in wartime and indicates why civilians should be content with less rubber and careful of that they have.

NEW PRODUCTS

Latest Machine Tools

Induction Heater 33

Work and power units are separate in 7½-kw. induction heating machine designed for annealing, heat forming, and hardening of small parts and for brazing carbide-tipped tools. Power (lower) unit is 30x36 in. and holds vertical 220/440-v., 3-phase, 60-cycle motor-generator set delivering 9,600 cycles; timer and field control switches are mounted on side of this cabinet. Work unit can be mounted on top of power cabinet or placed on a workbench (as in photo). It measures 20½x17x16⅜ in. and contains high frequency transformer, condensers, and panel for attaching work fixtures or indicator coils as well as quench valve, manifold, and gage for surface hardening. Quenching water can be delivered and returned through standard hose connections.—AVIATION, May, '44.

Parts Grinders 34

Small parts which require accurate grinding of parallel surfaces, such as washers, oil seals, sides of bearing races, piston rings, etc., can be ground at new high speeds, states **Chas. H. Besly & Co.**, Chicago, on company's grinders No. 253 (42-in. horizontal double spindle grinder) and No. 926 (double vertical spindle grinder). No. 253 rough- and semi-finishes work, while No. 926 is used for finishing pieces (to .0002 tolerance). Wide range of work can be ground on No. 253. Among fixtures are semi-automatic roll feed, semi-automatic rotary fixtures with multiple station solid or segmental feed wheels, power oscillating fixture, and hydraulic reciprocating planer type table mounted on base between grinding wheels. Unit is also equipped with vertical bar type wheel dresser and dresser bar. No. 926 is precision tool to finish-grind parts having an approximate equal area on parallel surfaces. Push button controlled wheel dressers, with adjustable diamond holders are furnished. Work feeding mechanism is semi-automatic magazine type with quick change endless feed chains. Multiple station rotary feed wheels mounted on vertical fixture spindle can also be furnished.—AVIATION, May, '44.

Hydromatic Milling Machine.....35

Accurately controlled milling of profile shapes is aim of Tracer Controlled Hydromatic line machines developed by **Cincinnati Milling Machine Co.**, Cincinnati. Units have same basic structure as regular line but are designed to provide sensitive tracer-controlled vertical movement of spindle carrier. Accurate duplication of master profile templates is obtained automatically, states maker, and automatic table cycles are synchronized with spindle carrier vertical movements. Tracer mechanism, mounted on spindle carrier, controls vertical position of carrier during cutting stroke of table. A roller on end of tracer valve mechanism engages master profile template. As table moves, roller moves along top of template; and vertical movements of tracer valve, imparted by roller, are duplicated

Forged ENGINE Vitals

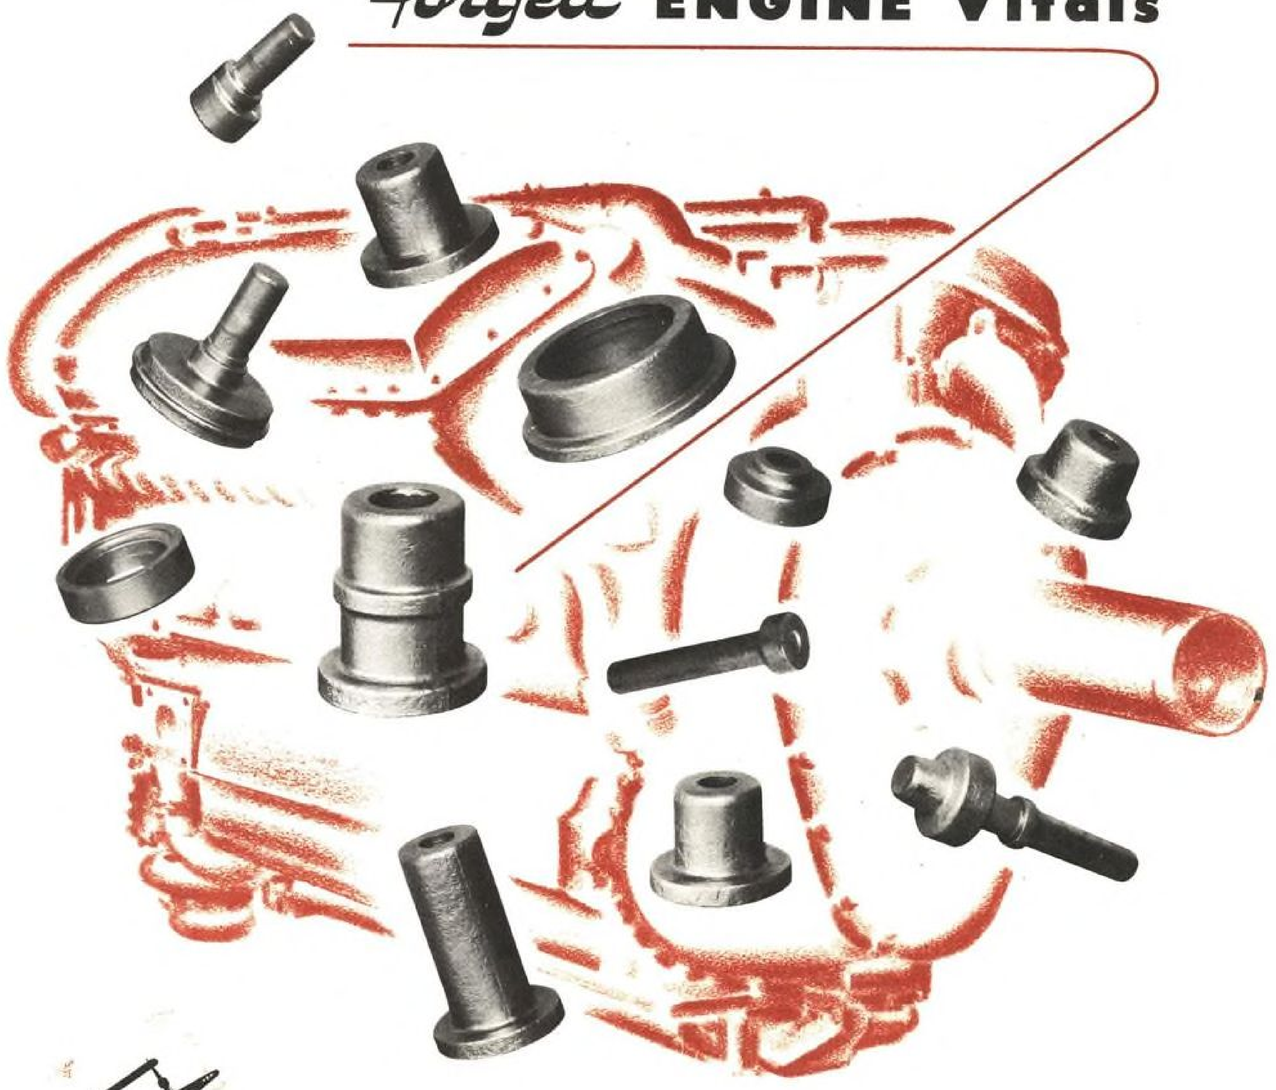

The 400 mile and higher speeds attained by our new pursuit planes subject engine forgings to terrific friction, heat and strain! Failure of a single part can cause disaster. Tube Turns forgings are standing the gaff demanded in engines which power the world's fastest aircraft! . . . Development engineers working on post-war problems, will find Tube Turns technical ingenuity and forging experience of practical value. TUBE TURNS (Inc.) Louisville, Ky.

TUBE TURNS *Forgings for Industry*

Symbol of U. S. Navy combat courage against overwhelming odds (see reverse side) is Sessions 5th in a series of 12 unusual war paintings presented by Tube Turns.

in magnitude by spindle carrier. Table and carrier movements are auto-synchronized so spindle carrier will always be in uppermost, or retracted, position before table can move at rapid traverse rate and, conversely, in lowered, or cutting, position, with tracer roller engaging template, before table can move at feed rate. Selector valve provides for disengagement of tracer control and permits use of machine for heavy duty production work. Table feeds are hydraulic and infinitely variable—**AVIATION, May,' 44.**

Optical Lens Grinder 36

Now offered by **W. F. & John Barnes Co.**, Rockford, Ill., is Model No. 4 automatic grinder (optical curve generator). Incorporating use of diamond tools, it is equipped with special hydraulically actuated system for automatic cycle operation,

and maker states a semi-skilled operator can operate one or several machines. Proper curvature is obtained by two simple angular adjustments of top spindle arm plus a differential screw micro-adjustment incorporated in spindle. For single lens operation, machine is equipped with vacuum holding device where lenses having sufficient edge thickness can be chucked and held without use of pitch. Capacity: 8-in. dia. maximum size lens. Machine dimensions: 70 in. high, 24 in. wide, and 33 in. deep. Loading height is 48 in.—**AVIATION, May, '44.**

MANUFACTURERS

• Announcement of new machine tools and shop equipment and accessories are invited for inclusion in these columns. In writing, emphasis upon aviation industry applications of newly-marketed items is desirable, and, wherever possible, glossy-print photos should be enclosed for illustration. (Please do not send electros.) Manufacturers should address —

New Products Editor
AVIATION
330 W. 42nd St., New York 18, N. Y.

Milling Cutter 37

This unit, offered by **Detroit Tap & Tool Co.**, Detroit, is designed to cut straight sided threads at production speed. Cutter teeth engage work parallel to axis of threads being formed but rotate in a plane inclined to straight side of thread. Inclination of cutter at an angle equal to taper of cutter provides clearance for straight side cutting face to give even distribution of cutting load over full length of tooth face without tearing action. A plain milling section of cutter removes incomplete thread at outer edge. —**AVIATION, May, '44.**

Hydraulic Press. 38

One of largest hydraulic presses ever built for powder metallurgy is designed for briquetting powdered carbides of tungsten, titanium, or tantulum for carbide cutting tools, dies, and inspection gages. It is also suited to other powdered metal forming requiring application of high pressure from two points. Made by **Hydraulic Press Mfg. Co.**, Mt. Gilead, Ohio, presses may be designed to meet customers' particular requirements. One shown here will exert a downward pressure of 1,500 tons and a 1,000-ton force horizontally. Completely self contained, two H-P-M Hydro-Power radial hydraulic pumps are directly connected through flexible couplings to a 30 hp. double-end-shaft electric motor. H-P-M Fastraverse prefill valves provide direct communication between overhead oil tank and two pressure cylinders. As press rams advance, cylinders are filled with oil by gravity, eliminating need for large capacity pumps. Pump pressure quickly builds up as soon as rams meet resistance. Operation is automatic with push button starting and automatic predetermined pressure reversal. Downward acting ram has maximum travel of 18 in. and horizontal stroke is 6 in.—**AVIATION, May, '44.**

Thread Grinder 39

New type of thread grinder, electronically controlled by GE Thy-mo-control drive, is announced by **Dalzen Tool & Mfg. Co.**, Detroit. Aimed to provide highest production of threaded parts, advantages are claimed in control of work quality, ease of operation, and speed of uniform production. Speeds of work and grinding wheel are individually controlled by dial

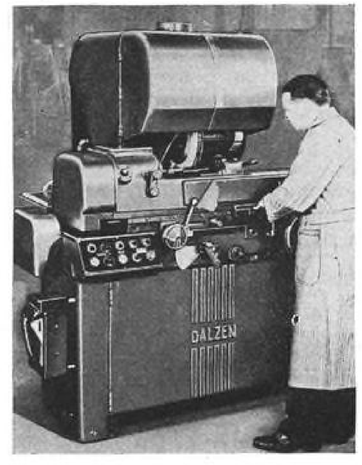

settings. This variation is stepless and ratio of speeds infinite. Gear changing is stated to be reduced to a minimum. Motor elevation of head is designed to permit rapid clearing of work. There are two models: No. 5 universal for work up to 9¾ in. length of thread any place on 20-in. shaft; and No. 6 production without back-off feature for work up to full 20-in. length of thread on 20-in. shaft.—**AVIATION, May, '44.**

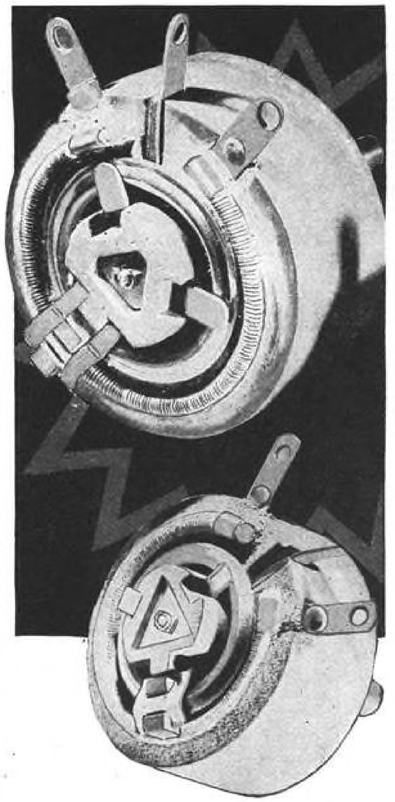

Tougher POWER RHEOSTATS

★ Because they are tougher, tens of thousands of these Clarostat power rheostats are in daily use. They are standard equipment in many fighting and civilian planes. Likewise in many radio, electronic and industrial assemblies that must stand the gaff. These power rheostats are proving that they can take it—and then some. And that is a characteristic of ALL Clarostat controls, resistors and resistance devices—products of "The House of Resistors".

★ *LET US QUOTE . . .*

Tell us about your requirements. Engineering collaboration, specifications, quotations, cheerfully submitted. Literature on request.

CLAROSTAT *Controls and Resistors*

CLAROSTAT MFG. CO., Inc. • 285-7 N. 6th St., Brooklyn, N. Y.

Shop Equipment & Accessories

Aircraft Putty 40

E. I. duPont de Nemoirs & Co., Wilmington, Del., announces that its Finishes Div., Parlin, N. J., has developed flexible, high-adhesion aircraft putty for filling dents and cracks between riveted aluminum sheets forming aircraft wings. Product is listed as No. 228-711. Of buttery consistency, it is stated to be fast drying, low in shrinkage, and of minimum weight.—AVIATION, May, '44.

Jig Saw 41

Announced is new jig saw offered by **Boice-Crane Co.**, Toledo, Ohio—unit with universal full-duty blade chucks that take blades from 5 to 9-in. long and also die files. For heavy-duty sawing and sanding of metals, woods, and plastics, unit measures 24x5 in. Cast iron work table is 20-20 in. When upper head is turned, states company, blade-guide, blower, and hold-down all follow around as one unit. —AVIATION, May, '44.

Portable Sander 42

Outstanding feature of Sterling 1000, sander offered by **Sterling Tool Products Co.**, Chicago, is flexible sanding pad which detaches by pulling out latch. Loaded pads can be kept near work and

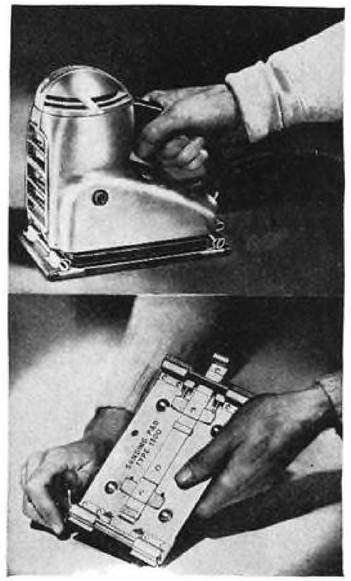

changes made quickly. Unit is designed to provide fast, uniform cutting on wood, metal, and plastic, and is stated suitable for everything from coarse sanding to lapping and finishing. Flexible pad will conform to moderate curvatures, while special pads for unusual contours are available for those manufacturers desiring them.—AVIATION, May, '44.

Discharge Circuit Resistors 43

Announced by **Sprague Specialities Co.**, North Adams, Mass., are Meg-O-Max resistors for high resistance value units for operation at high voltages and ambient temperatures, also for dissipating power. Resistors are available in two lengths: Type 1, 5 9/32-in. long, with range of 3,600 ohms to 100 megohms; and Type 2, 9 25/32-in. long, with range from 6,800 ohms to 100 megohms. Units are formed of series of pressed and sintered ring-shaped segments electrically joined for non-induction. Finished resistors are encased in hermetically sealed glass envelope provided with ferrule terminals.—AVIATION, May, '44.

Camouflage Remover 44

Offered by **Kelite Products**, Los Angeles, for camouflage removal, is KDL No. 32, new cold stripper applied by spraying or brushing. Paint removal can be completed by hosing with water.—AVIATION, May, '44.

Hydraulic Test Bench 45

Model T-113, by **Hydraulic Machinery**, Dearborn, Mich., includes intensifier for developing up to 30,000 psi. Hydraulic circuit consists of a 2,000-psi. constant delivery pump (approx. delivery 2 gpm.) directly connected to manifold incorporated in high pressure intensifier hydraulically operated with 15-to-1 ratio. Reported features of pictured "HY-MAC" model: High pressure connections, balanced high pressure plunger and packless plunger sealing, extreme pressure inlet check valve for charging high pressure cylinder, multiple in-line high pressure connections for burst testing (four tubes or other parts simultaneously), high pressure gage and pressure release connections and "O" ring type packing on low pressure piston. Rolling Plexiglas top protects operator when making burst tests. Dimensions: 37 in. wide; 41½ in. high; and 96 in. long. Intensifier is 30 in. x 9 in.—AVIATION, May, '44.



Clamp for Small Work 46

Parlec clamp, announced by **Earl C. Parkhurst**, Inglewood, Calif., is for holding small work together in tapping, drilling, etc. Device consists of two case-hardened steel jaws, two case-hardened steel adjustment nuts, and two heat-treated steel studs. Studs are fastened solidly to lower jaw, and one adjustment nut is screwed on rear stud. Upper jaw is slid into place on studs and other nut screwed into place on front stud. Thus top jaw is movably controlled by two nuts, front nut acting as a pivot and rear nut exerting gripping pressure. Tightening torque is positive. Model C-15 opens to 5¼ in. with jaw length of 6¼ in., while Model C-20 opens to 6½ in. with jaw length of 7¾ in. Special sizes, however, may be ordered.—AVIATION, May, '44.

Carbide Tipped Tools 47

A new line of standard carbide tipped tools in six shank and tip styles is announced by **New England Carbide Tool Co.**, Cambridge, Mass. Tips are finish-ground on diamond wheels to give exposed surfaces mirror finish. Two grades are supplied.—AVIATION, May, '44.

Angle Drill 48

Lighter in weight because of die-cast body, new drill brought out by **Zephyr Mfg. Co.**, Inglewood, Calif., has large-area, replaceable, oil-less bearings. Drive shaft is precision ground, and gears are

heat treated. Steel snap-on guard provides protection. Spindle offset is 7/32 in. and spindle thread ¼-28.—AVIATION, May, '44.

Control Disconnector 49

Device called "Potter Disconnect" is for quickly disconnecting push-pull, torque tube, or cable controls. It is stated to separate any control rod, tube, or cable simply by depressing a spring with an integral knurled sleeve. Control is connected by placing two ends of device together and permitting beryllium-copper coil to spring into place. Three sizes—⅜, ½, or ¾ in.—are offered by **Otto Aviation Co.**, Bloomfield, N. J.—AVIATION, May, '44.

Air-Line Water Eliminator 50

Unit designed to eliminate water in air lines, is offered by **Inco Engineering Co.**, Cedar Rapids, Iowa. Described as air-strainer with trap, it operates on principle of high velocity impingement on cold surfaces in three stages for removal of moisture and oil. It is installed in air supply line nearest air grinders and air tools. Water exhaust valves are provided to relieve trapped water.—AVIATION, May, '44.

MAKE TIME
with
"YANKEE" TOOLS!

Do the tools you buy make your work easier, faster, more efficient? Do they save you time, money, trouble? Will they stand the pressure of hard work, earning their keep by long, dependable service? They will, indeed, if they are "Yankee" Fine Mechanics' Tools, the choice of true craftsmen everywhere, for more than half a century. There's only one trouble with "Yankee" Tools today, but that's a trouble that will be corrected quickly by Victory: Supply can't keep up with demand . . . for "Yankee" Tools, you see, are at work for war. So remember the built-in ingenuity of "Yankee" Screw Drivers, Drills, Vises, Bit-Braces, and Tap Wrenches. They've been *designed* to make time! And making time, above, is "Yankee" Spiral Screw Driver No. 130A — a size for every purpose.

Order from your supply house, or write North Bros. Mfg. Co., Dept. AV-544, Phila., Pa. Furnish priority ratings whenever possible, and every effort will be made to fill your orders.

"YANKEE" TOOLS
make good mechanics better
North Bros. Mfg. Co., Phila. 33, U. S. A.
Established 1880

FLUID POWER
ENGINEERING
by Parker

FLUID POWER. Confine fluid in a closed system, apply power at one end, and you deliver power instantly at the other end.

That is Fluid Power—based on hydraulics—the 1944 way to get work done. Any kind of work—hard or easy, brutal or delicate.

You can step Fluid Power up or step it down—to lift a tank or wind a watch. You can make it fit the job. You can flow it around corners and into tight places. You can regulate it, by valves, within precise limits.

TRANSMITTING FLUID POWER. Fluid Power is transmitted through tubes; it needs no shafts, gears, pulleys or belts.

When a system of tubes is used to transmit Fluid Power, it calls for wrinkle-free bends, leak-proof fittings, precise operating valves, flow without obstruction. It gets to be an engineering job.

FLUID POWER ENGINEERING. That's been Parker's business for twenty years—designing Fluid Power tubing systems, engineering them, building valves and fittings, and making fabricating tools. Often we do the fabricating, too.

Today, you'll find Parker-engineered Fluid Power systems in refrigerators and bombers, in chemical plants and locomotives—everywhere in industry.

LOOKING AHEAD. With at least one eye on the future, wouldn't you like to talk this through now with a Parker engineer? No matter what you make, or what kind of machines you operate, you are likely to find some interesting possibilities in the Fluid Power idea. An interesting booklet, giving you more facts about Fluid Power, will be sent on request. Address Parker Appliance Co., 17325 Euclid Ave., Cleveland 12, Ohio.

PARKER
APPLIANCE COMPANY
CLEVELAND • LOS ANGELES
FLUID POWER ENGINEERING

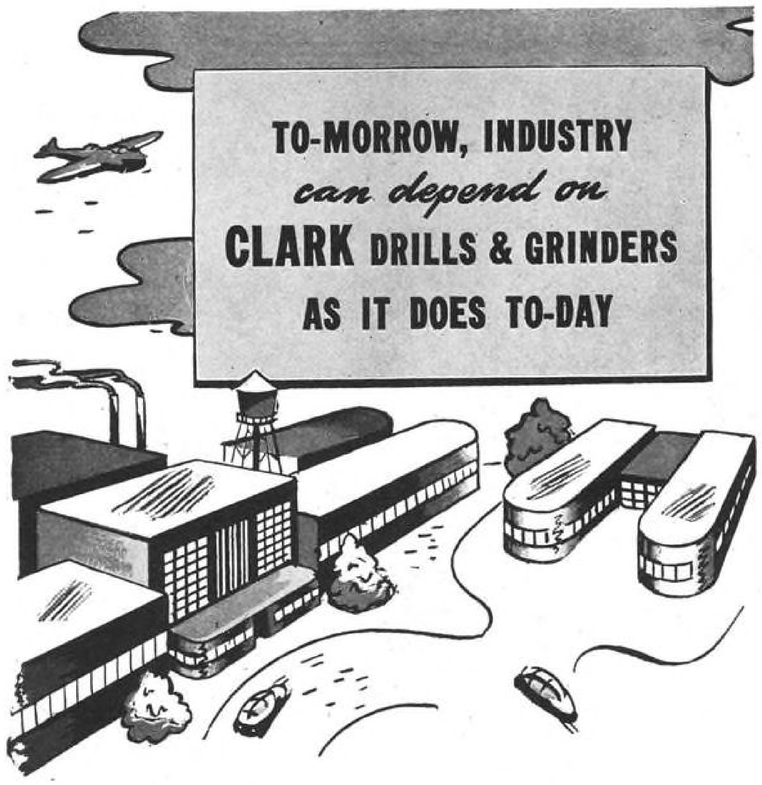

Ever since James Clark built the first electric drill over 50 years ago, the James Clark Jr. Electric Company has been first with all major improvements and innovations in these tools.

Present demands for production have called for greater efficiency and longer life for all types of machinery. Clark has so improved its electric tools that they have become known as the "work horses" of industry. Their greater efficiency and longer life have been outstanding.

Tomorrow, in the post-war era, Clark's portable drills and grinders will be available to all industry.

In your post-war planning, include these electric tools. James Clark Jr. Electric Company builds a wide range of sizes and models and has the tool that will fit any job. Look to this company for the finest in portable drills and grinders.

The James Clark Jr. Grinders and Drills shown are speeding production in war plants that manufacture vital war equipment.

First in the field CLARK Electric Tools

JAS. CLARK, JR. ELECTRIC CO.
612 BERGMAN ST., LOUISVILLE, KY.

Composition Applicator 51

"Auto-Doper", an automatic air-operated cylindrical and rectangular composition applicator for use on any type polishing and buffing machine, is announced by **Hammond Machinery Builders,** Kalamazoo, Mich. It can be used for either cylindrical or rectangular bars by changing composition housing. Operated by compressed air, frequency of operation is controlled by air valve operated from cam, electrical timer, or foot valve. Unit as pictured is for 12-in. max. width by 2-in. thick by 10-in. long rectangular composition bars. Device for cylindrical composition bars takes work up to 2¾-in. dia. and 10 in. long.—AVIATION, May, '44.

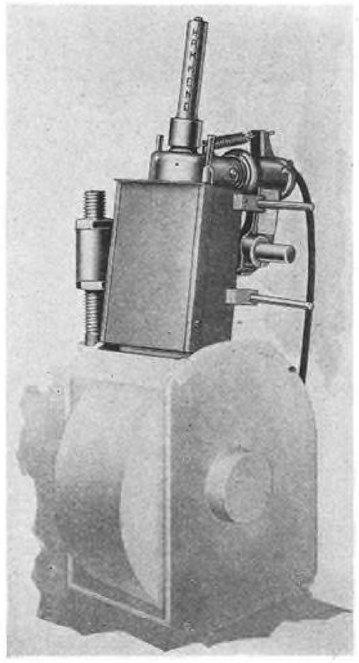

Engine Starter 52

The Mallory Rectostarter, offered in portable or stationary models, is designed for starting aircraft engines, also as a d. c. power source for operating plane lights, radio and instruments while the craft is on the ground, and for testing. Supplies 12 or 24-v. d. c. with high surge for starting, and in continuous operation

it is rated at 100 amp. at 24 v. or 200 amp. at 12 v. Operates from 208-230-v. a. c. 3-phase circuits, or 460-v. a. c. 3-phase circuits. Maker is **P. R. Mallory & Co.,** Indianapolis.—AVIATION, May, '44.

A new Alloy Steel created by Timken metallurgists and introduced by the General Electric Company in their Turbosupercharger now plays a vital part in the G-E Jet-Propulsion Motor.

This new steel is tough. It's a steel able to resist the terrific heat created by hot gases passing through the vanes of the turbine wheel and also the tremendous centrifugal force developed in the wheel while spinning madly at thousands of revolutions per minute. Ordinary alloy steels would disintegrate if subjected to these gruelling demands.

In addition, this new Timken Alloy Steel has excellent weldability, good machinability, and high resistance to scale and corrosion at operating conditions. An impressive list of qualities, but everyone of them necessary to provide a practical jet propulsion power plant.

The big part Timken Alloy Steels have played in the past and are now playing in the war, emphasizes the promise that they will be of steadily increasing value in peace. Steel and Tube Division, The Timken Roller Bearing Company, Canton 6, Ohio.

TIMKEN
TRADE-MARK REG. U. S. PAT. OFF.
ALLOY STEELS

ANOTHER

Fastening Problem Solved!

THE ROSÁN MOLDED-IN REPLACEABLE INSERT

When Clarke Aero-Hydraulics, Inc., of Pasadena, started to manufacture handles for Gun Turret Control Valves, they foresaw possible damage in field service and wisely made provision for quick repairs to the steel fastening points which were molded in the plastic handles. They specified the Rosán Replaceable Molded-In Insert, the only one which can be removed and replaced without disturbing the parent material.

Thus another problem of manufacture and assembly was solved by the Rosán Locking System for Threaded Inserts and Studs in all materials.

Rosán Locked-In Threaded Inserts and Studs solve a multitude of fastening and sealing problems in all types of industry.

Manufacturers and designers are invited to submit inquiries to our Engineering Department. Consultation and experimental installations of our parts . . . free.

ARMY E NAVY

THE ROSÁN LOCKING SYSTEM

A Product of

BARDWELL & McALISTER, INC.

Dept. 3-54, Box 1310, Hollywood 28, Calif.

Roll Snap Gage 53

Limitrol, new snap gage, is of comparaitor type, with dial indicator gage. Designed for use as hand or bench type, gage made by **N. A. Woodworth Co.**, Detroit, is stated to perform six inspection operations in one—that is, checks of

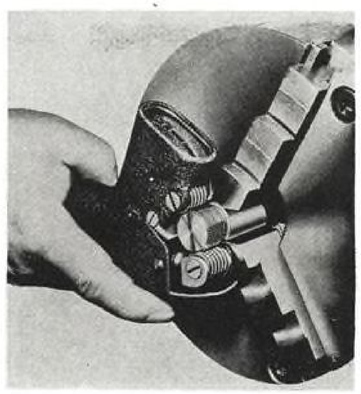

pitch diameter, lead, taper, angle, straightness, and out-of-roundness. It is made in six nominal sizes and is adjustable ¼ in. either way. Thread diameters from #6 to 1 in. can be gaged. Rolls are provided in three widths: ¾, ⅝, and 1 in. Photo shows gage used as hand model.—AVIATION, May, '44.

Synthetic Cut-Off Disks 54

New Radiac synthetic disks and grinding wheels, made by **A. P. de Sanno & Son**, Phoenixville, Pa., are offered in place of scarce crude rubber products. Reported features are long life for fast, free cutting, giving excellent finish and little burn. Made in standard range of thicknesses and diameters up to 20 in., they are stated to show effective performance on wet grinding of ball bearing races and roller bearings.—AVIATION, May, '44.

Temperature Control 55

Named "Chronotrol," new instrument produced by **Wheelco Instruments Co.**, Chicago, has been developed to enforce any desired heating or cooling program through providing completely automatic regulation, regardless of charges in temperature desired, for any given process. Desired cycle is cut on a disk, and latter's rotation by synchronous motor moves setting lever of instrument. Unit is offered in 25 models.—AVIATION, May, '44.

Pressure Switch 56

New type pressure switch, with ranges from 5 to 5,000 lb., is equipped with direct action gage for hydraulic pressures operating sensitive electric switch. Size: 10x7x3 in. Maker is **Hercules Elec. & Mfg. Co.**, Brooklyn.—AVIATION, May, '44.

Boring Head 57

Borset, dial-set adjustable boring head for use in screw and milling machines, is announced by **L. H. Harvey Associates**, Minneapolis. Adjustable by means of large 1¼-in. dial calibrated in 25 divisions of .001 in., without removing tool,

it is designed to speed production and reduce set-up time. Available in two sizes: No. 1 for bores of from ½ in. to 1¾ in.; No. 2 from ½ in. to 2¾ in.—AVIATION, May, '44.

Circular Slide Rule 58

Tavella Sales Co., New York City, offers 6-in. dia. "Monitor" slide rule made of white Vinylite. This circular rule is reported accurate within 0.5 percent. Scale length is 13.8 in.—AVIATION, May, '44.

Bag Sealing Compound 59

Non-hardening sealer has been developed for added waterproof protection for export case liners and bags. Product sets up a bond between folds and is pliable to withstand shock and twisting. It withstands temperatures from —30 deg. F. to 200 deg. F., states maker, **Witco Chemical Co.**, New York.—AVIATION, May, '44.

Aromatic Solvent 60

New alkyl aromatic solvent for use in metal-washing machines is non-inflammable and non-combustible, has no low volatiles, and forms sparkling clear solutions with water, states manufacturer, **Curran Corp.**, Malden, Mass.—AVIATION, May, '44.

Double-Action Calipers 61

Modern Caliper & Tool Works, Chicago, announce combination calipers for both inside and outside measurements. Double unit comes in 3-in. and 6-in. sizes.—AVIATION, May, '44.

New Countersink 62

Micro-set stop countersink, marketed by **Aircraft Tools**, Los Angeles, has few parts. It features split collet type shaft to allow use of various cutters and

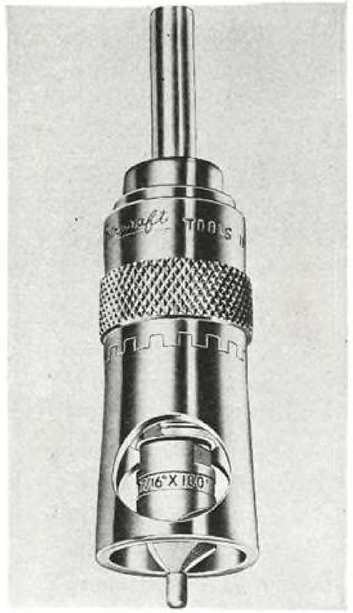

pilots, full ball thrust bearing, positive sight adjustment in increments of .002 in., lock spring in sight adjusting sleeve, and pin that locks stop collar to shaft. Spring loaded spindle retracts cutter back into stop cage for safety.—AVIATION, May, '44.

Etcher and Demagnetizer 63

Combination unit for etching and demagnetizing small tools, parts, etc., provides 14 heats, giving wide range from small, delicate parts to large castings. There is two-position switch for demagnetizing. Maximum rating is 5.5 amp., and over-all pole area is 13½ sq. in. Specifications; overall dimensions 8¼ x11½x8⅝ in.; size of work plate 8¾x7¾ in.; weight 39 lb. Manufacturer is **Ideal Commutator Dresser Co.**, Sycamore, Ill.—AVIATION, May, '44.

E Compounds for Faster Cleaning!

ANODEX Especially developed compounds for use with the *original* ANODEX reverse current electro-cleaning process for fast, positive cleaning of ferrous metals.

METEX Individually formulated compounds for precision cleaning. Now available in special variations developed for aviation problems.

METALEX Easy to use, economical compounds for use in tumbling machines as soak cleaner or electric cleaner. Individually formulated.

Especially Formulated for Aviation Problems

★ *Fast and Positive* ★

Anodex, Metex and Metalex are only three of the many cleaners developed by MAC DERMID INCORPORATED for the aviation industry and at present being used to improve and speed-up aircraft production. A qualified service engineer, located at our distributor offices, will be pleased to show you the compound developed for your problem—help you speed up and improve your production.

WRITE FOR *Free* DATA SHEETS

MAC DERMID

INCORPORATED

WATERBURY 88, CONNECTICUT

WRITE ONE OF THESE SERVICE ORGANIZATIONS FOR FREE DEMONSTRATION

NEW YORK	DETROIT	CHICAGO	CLEVELAND	ST. LOUIS	TORONTO—CAN.
Udylite Corp. (L. I. City)	Udylite Corp. Wagner Bros.	Udylite Corp. Geo. A. Stutz Mfg. Co.	Udylite Corp. McGean Chem. Co.	LaSalco, Incorporated	Clark Industrial Supplies Co.

When a short flash of light means the difference between mission completed and utter destruction, E. A. meets the test. For the lives of the crew and the safety of the ship depend on whether the correct succession of flashes answers the challenge. Friend or foe! Godspeed or hot lead! It's such accuracy of manufacture that is responsible for E. A. Laboratories' leadership in the many industries it serves.

E. A. LABORATORIES, INC., BROOKLYN, N. Y.

MAKERS OF AUTOMOTIVE, AVIATION, BICYCLE AND MARINE APPLIANCES

Grinding Bands 64

Fitted over rubber mandrels of suitable size, Three-M-ite cloth "Evenrun" bands, made by **Minnesota Mining & Mfg. Co.**, St. Paul, Minn., are designed to expedite individual finishing jobs on small and

intricate pieces. Described as fast cutting and long wearing, bands are available in three sizes, ranging from 3/32 in. to 8 in. and with face width of ½ to 3 in.—AVIATION, May, '44.

Relay Set 65

Sensitive SS-5 relay set is announced by **H-B Instrument Co.**, Philadelphia. Unit is used with company's Red-Top thermo-regulator, also in conjunction with galvanometers, contact-equipped meters, gages, or other relay-operating instruments requiring low-gram contact pressure. Set consists of sensitive iron-core-magnet type relay (operating on 110 v. and 2 milliamps), and a solenoid-type mercury-plunger relay, the tube handling a load up to 30 amp. at 110-v. a. c. or 20 amp. at 220 v. Two relays are mounted side-by-side in hinge-covered housing, 5¾-in. wide, 5¼-in. high, 3½-in. deep. —AVIATION, May, '44.

For Difficult Grinding.....66

Two new related products.—DoAll electro-magnetic chuck and the "Selectron," aimed to improve and ease difficult grinding operations—have been developed by **Continental Machines**, Minneapolis. Through use of devices, states maker, amount of magnetic pull of chuck is under control of operator. Selectron employs electronic power to control flow of magnetic pull and to demagnetize chuck. Insulation is incorporated to prolong life of electric circuit and to conduct heat generated by coils to outer surface, where

it is dissipated to eliminate distortion of chuck surface. Chuck is watertight. Chucks are available in sizes 6x18 at 125 w. and 8x24 at 175 w. Both may be operated with 110v. d.c. or 220 v. d.c. In surface grinding, operator has variable control of current.—AVIATION, May, '44.

PREPARE TO COMPETE . . .

Plan ELECTRIFIED Materials Handling!

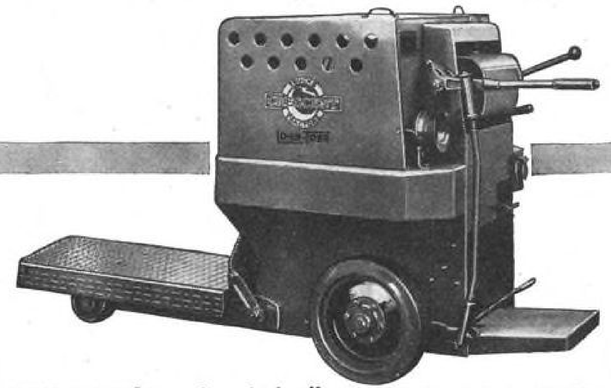

LO-LIF-TOER (LDLF)—Foot Lift Elevating Platform Truck. (3,000 lbs. capacity.)



NCRE—High Lift or Tiering Truck. (4,000 and 6,000 lbs. capacity.)

NDRE—Low Lift Elevating Truck. (4,000 and 6,000 lbs. capacity.)

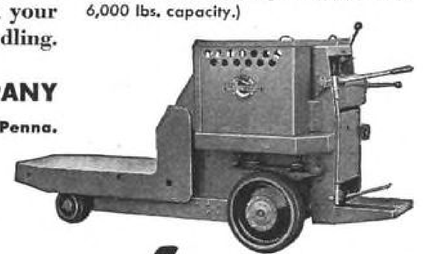

"THERE'S A BIG future in aviation"—sure, but don't forget, it's going to be a *competitive* future.

Be ready with the most efficient production system you can plan—*including electrified materials handling*. Because that's the kind of materials handling you'll compete with! Old fashioned methods will be . . . and already are . . . as outmoded as pre-war biplanes.

Alert leaders in the aviation industry figure that performance under the pressure of war production has proved Crescent Trucks fit for the pressure of competition. Keep pace! Let's get together now to plan your future Crescentized materials handling.

CRESCENT TRUCK COMPANY

1120 Willow St. Lebanon, Penna.

CRESCENTIZE YOUR MATERIALS HANDLING

Crescent ELECTRIC TRUCKS and TRACTORS

Industrial Truck and Tractor Specialists for More Than 25 Years

Pneumatic Jaw 67

Hufford pneumatic jaw, a positive-opening-closing unit for holding work-piece during stretch-forming operations on Hufford beveling machine, comprises double acting integral air valve, piston assembly, housing, collar, and hardened steel jaw inserts. Valve operates via regular air supply. Air pressure against back of piston thrusts jaw forward to grip work solidly. Reverse stroke of piston releases work. Because of force generated, no "freezing" is possible, states maker, **Hufford Machine Works,** Redondo Beach, Calif.—AVIATION, May, '44.

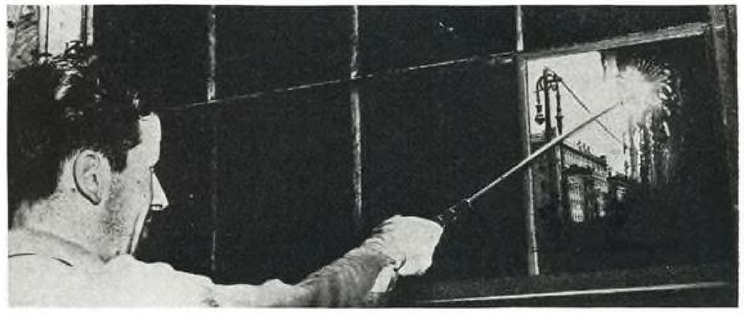

Blackout-Paint Stripper 68

Primarily for removal of blackout paints of both asphaltic and non-asphaltic types, "Re-Lite" is ready-to-use product. Of heavy body, it clings without runs and is fast acting even on paint which has baked on light globes, states maker, **Turco Products,** Los Angeles. It is further reported that it will not attack concrete, brick, mortar, stone, tile, or marble, and that it has good penetration and cleaning power on porous materials, with cold water rinsing it completely.—AVIATION, May, '44.

Paper Toughener 69

New synthetic resin, development of **Resinous Products & Chemical Co.,** Philadelphia, is designed to make paper tough enough to withstand rain, mud, and snow. Treated paper is now used for guards to protect heavy aerial bombs; many industrial applications are foreseen.—AVIATION, May, '44.

Casting Resin 70

Produced by **Adhere, Inc.,** Los Angeles, Toolite casting resin is described as light and tough, with compressive strength up to 20,000 psi., and ability to "take" temperature of 400 deg. F. It is stated to be applicable in wide ariety of production tools, including structural parts of radial drills.—AVIATION, May, '44.

Wire Wound Resistors 71

Elco Resistors Co., N. Y. C., offers wire wound resistors in four sizes: "A", 15/32 long by ½-in. dia., 1 to 300,000 ohms; "B", 15/16 long by 12-in. dia., 1 to 500,000 ohms; "T", 1 1/32 long by 7/16-in. dia., 35 to 35,000 ohms; and "M", 1 13/32 long by ¾-in. dia., 1 meg ohm.—AVIATION, May, '44.

Multi-Grip Chuck 72

A new hydraulic multi-grip milling machine chuck is announced by the **Aerco Corp.,** Hollydale, Calif. New chuck has two rows of five collets, and since both rows of parts held in collets may be milled simultaneously, ten parts may be milled with one loading. Maker states that a few strokes of hydraulic pump (shown mounted on front of chuck), supplies pressure for closing all collets simultaneously, building up pressure to as much as 2,500 psi to hold work rigidly in collets. An adjustable depth stop, provided for each collet is designed to make it possible for operator to quickly insert pieces to be milled and at exact amount without use of gages. Chuck is available in two models, with pump, valves, pressure gage, depth gage, and collet assemblies all incorporated in main body of chuck itself. One size, 14¼x4½x4½ in., has collet capacity of ⅛ to ½ in.; other, measuring 21x6¾x6¾ in., takes



collets from ½ to 1¼ in. Round, square and hexagon collets are available for both chuck models.—AVIATION, May, '44.

Guardsman

FINISHES

for AIRCRAFT

PRODUCTION

an exclusive product of

Guardsman SUPERIOR AIRPLANE FABRICS

GRAND RAPIDS VARNISH CORPORATION

GRAND RAPIDS, MICHIGAN

CONTINUOUSLY SUPPLYING FINISHES TO WRIGHT FIELD SINCE 1935.

GRAND RAPIDS VARNISH CORPORATION GRAND RAPIDS, MICHIGAN

Toolmaker's Wiggler 73

Three interchangeable shafts are designed to assure precision set-ups with increased speed and accuracy in wiggler devised by **Nork Products Co.,** Los Angeles. Ball shaft is used for indicating from ground or machined surfaces and from gage blocks, also from side of round bars. In use, ball is first made to run true by holding any blunt object against it while spindle is turning, then it is coated with layout blue. Work is then fed toward ball until blue is barely wiped. Table is next lowered and moved .125 in. —half diameter of ball—to bring reference under spindle center. Subsequently, by using micrometer collar on lead screw, any desired distance can be located. Bent shaft is designed to hold any type indicator. Needle point shaft is used to find centers and to true-out layout lines. Spring chuck holds shafts.—AVIATION, May, '44.

Aircraft Nut 74

Unusually low installation torque allowing speedier operation is reported by maker, **Tinnerman Products,** Cleveland, for new light, one-piece-integral "Hi-

Stress" Speed Nut, which is interchangeable with nut plate AN 362 for high temperature applications. Self-locking torque of nut is said to be retained after many removals.—AVIATION, May, '44.

A.C.-D.C. Power Supply 75

New Eclipse power supply systems, by Eclipse-Pioneer Div., **Bendix Aviation Corp.,** Teterboro, N. J., consist of engine-driven generators and carbon pile voltage regulators for both a. c. and d. c. outputs. Designed to mount on main engine generator drive pads of aircraft, they are fitted for generator blast cooling. Incorporated are 6-in. round flanges with 12 25/64 in. holes, 5-in. bolt circle diameter, 4.122-in. pilot dia., and a 16-tooth involute male drive spline. Available capacities: 60 to 20 amp. at 28.5-v. d. c. and 10.4 to 30.5 amp. at 115-v. a. c. Both a. c. and d. c. rated outputs are available



simultaneously, states maker, offering weight saving advantages. Rotating field inductors are to permit use of stationary a. c. windings, and d. c. outputs of more than one a. c.-d. c. generator can be paralleled. Regulation without fluctuation and minimum radio interference are reported.—AVIATION, May, '44.

Miniature Tube Socket 76

Radio tube socket offered by **Hugh H. Eby,** Philadelphia, has silver plated, "micro-processed" beryllium copper contact stated to give higher electrical conductivity and low contact resistance between socket and tube pin. In low loss and general purpose types, sockets are designed to withstand humidity cycle, immersion, and vibration, and thermal shock.—AVIATION, May, '44.

We know all the "ANGLES"

Send for catalog on Angle Drills and other tools

No. ZT. 21
180° FLAT OFFSET
Heavy duty

No. ZT. 115
45° PORK CHOP
Die cast body

No. ZT. 17
90° MIDGET ANGLE
Small but tough

No. ZT. 47
360° MIDGET
Swivel head
Light duty

No. ZT. 44
45° ANGLE DRILL
Oilless bearings

No. ZT. 19
90° STANDARD DUTY
Ball bearing spindle

No. ZT. 20
45° STANDARD DUTY
Hardened gears

No. ZT. 146
360° SWIVEL HEAD
All parts are interchangeable

No. ZT. 10
90° HEAVY DUTY
Takes 3-jaw chuck

These drills are precision made and all parts are interchangeable

Order a few to test in your plant -you'll like the way they perform

Zephyr Angle Drills are hard at work in aircraft plants everywhere. Precision made . . . dependable performance. Delivery when promised. Write for our catalog. Use your letterhead or write name, firm and address on margin of this page and mail.

Don't hesitate to write for a copy of our catalog



ZEPHYR

High Quality Precision Tools

ZEPHYR MANUFACTURING COMPANY
Factory and Head Office:
201 Hindry Avenue, Inglewood, California
Eastern Branch Office:
609 Stephenson Bldg., Detroit 2, Mich.

Electrical Cords 77

Developed by the newly formed Cordage, Inc., retractable electric cords, stated to be stretchable to several times original length, are now being distributed through **Kellogg Switchboard & Sup. Co.**, Chicago. Stretch effect is secured



through special spiral-molding of rubber jacket. Cords are made in various lengths and for various current capacities. Aviation industry uses are seen.—AVIATION, May, '44.

Prop Governor Test Stand 78

Designed to produce flight-condition vibration on unit being checked, stand developed by **Airplane Mfg. & Sup. Corp.**, North Hollywood, Calif., is for testing, calibrating, and adjusting Curtiss propeller governors. Features: Automatic control to allow governor to control speed of driving unit; a selector switch providing choice of automatic or manual operation; two lamps to indicate closing of the inc. and dec. rpm. governor contacts; and a lamp to indicate any grounded circuit. Driving power is provided by 3 hp. variable-speed unit with 900-3,600 rpm. range (standard, 220-v. a. c., 60-cyc., 3-phase motors; other voltage on request). Chronotachometer unit consists of electric clock, revolution counter, and tachometer. Power is supplied from outside source, and control of stand and motor is through push-buttons.—AVIATION, May, '44.

Multiple Collet Holder 79

Aimed to speed up production on milling machines and make possible numerous set-ups to boost output, pictured unit consists of four collet holding fixtures. Offered in either 1 in. or 2 in. size fixtures, may be mounted parallel with, or at right angles to, the spindle. Maker, **Zagar Tool**, Cleveland, says 2, 3, or 4 collets,



or multiples thereof, may be used, length of table being only limiting factor. Where miller is equipped for climb-cutting, two fixtures can be mounted on each side, making a total of 16 collets on one set-up. Center to center of collets is 3¼ in. on the 1-in fixtures and 5½ in. on 2-in. fixtures.—AVIATION, May, '44.

Tube Cutter 80

Designed to make clean right-angle cuts in processing AN-type flares, tube cutter, made by **Imperial Brass Co.**, Chicago, cuts aluminum, aluminum alloy, copper, brass, or steel tubing in sizes from ⅛ in. to 1⅛ in. o. d. Reported features: Handles great range of sizes; tubing rests against two rollers, to prevent galling or rubbing; special flare cut-off groove is provided in rollers to enable operator to remove a damaged flare with minimum of waste. A reamer for removing burrs is part of tool.—AVIATION, May, '44.

Helping the warbirds take a big bite—

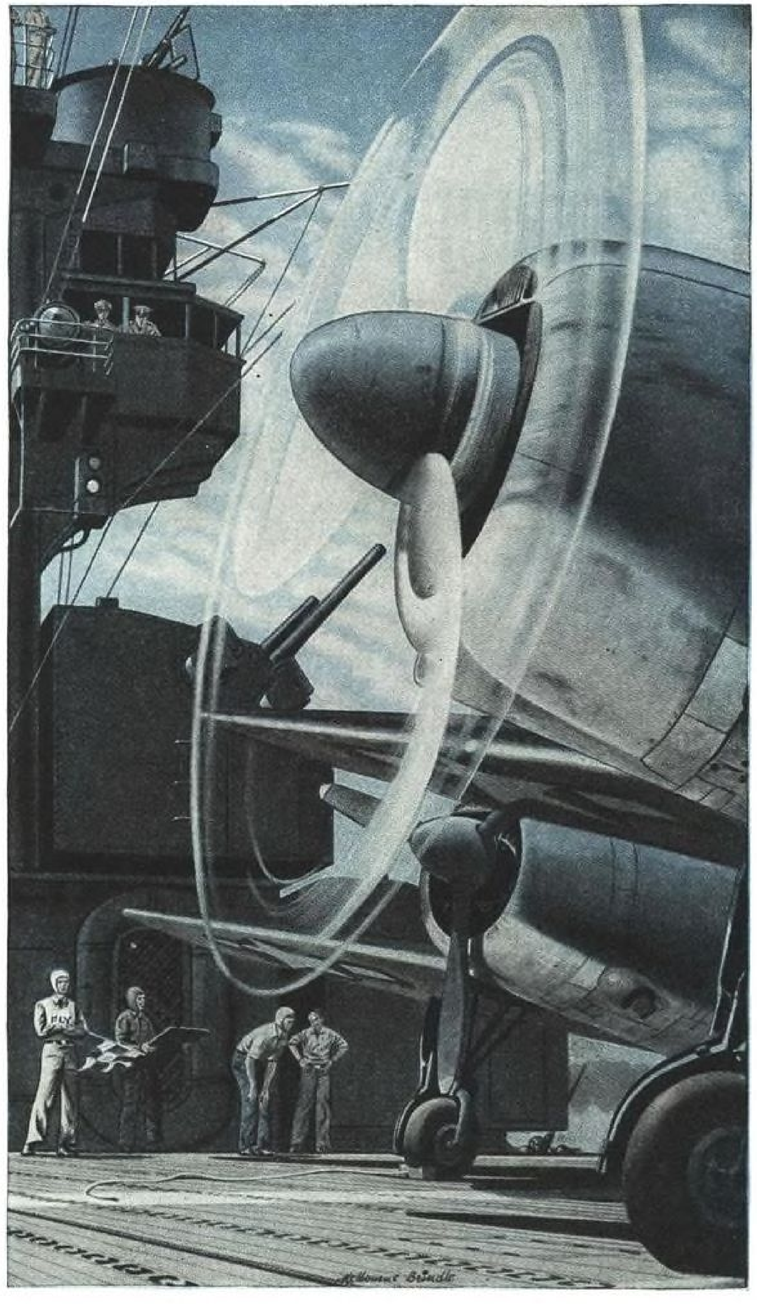

*B*orn of combat experience, the Navy's new Curtiss *Helldiver* is heir to all the improvements developed from battle crowded skies since Pearl Harbor. And one of the things that makes it a plane to write home about is its variable pitch propeller.

The intricate gear mechanism for these 3-bladed, full-feathering props is being built by the Detroit Gear Plant of Borg-Warner's Norge Division.

These propellers adjust to every change in altitude, wind resistance, engine speed.

The skillful engineering needed to produce gear mechanisms of such delicate sensitivity is another result of Borg-Warner's long-time principle: "design it better—make it better." More than 100 war items are today benefiting by it.

With the end of the war, this Borg-Warner principle will again be applied to the task of working with you in the automotive industry toward a better living for all America.

Partners with the Aviation industry in peace and war, Borg-Warner supplies these and other essential parts . . .

HYDRAULIC, VACUUM AND FUEL PUMPS
REDUCTION AND PROPELLOR GEARS
UNIVERSAL JOINTS CARBURETORS
ENGINE PARTS AIRCRAFT CONTROL
CHAINS AIRCRAFT CLUTCHES
POWER TURRETS OIL COOLERS
HELICOPTER TRANSMISSIONS
COIL SPRINGS AND FLAT SPRINGS

ENGINEERING B-W PRODUCTION

BORG-WARNER

Peacetime makers of essential operating parts for the automotive, aviation, marine and farm implement industries, and of Norge home appliances . . . these units which form the Borg-Warner Corporation are today devoted exclusively to the needs of war: BORG & BECK • BORG-WARNER INTERNATIONAL • BORG-WARNER SERVICE PARTS • CALUMET STEEL • DETROIT GEAR AIRCRAFT PARTS • DETROIT VAPOR STOVE • INGERSOLL STEEL & DISC • LONG MANUFACTURING • MARBON • MARVEL-SCHEBLER CARBURETER • MCCULLOCH ENGINEERING • MECHANICS UNIVERSAL JOINT • MORSE CHAIN • NORGE • NORGE MACHINE PRODUCTS • PESCO PRODUCTS • ROCKFORD CLUTCH • SPRING DIVISION • WARNER AUTOMOTIVE PARTS • WARNER GEAR

SPECIFICATION FOR TOMORROW'S PLANES:

INTERIOR OF VELON!

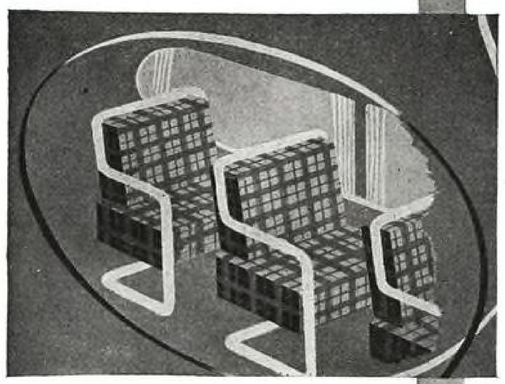

Imagine an upholstery material *practical* for airline use in any color — from darkest to lightest and brightest! An endless variety of patterns and weaves. A material that keeps *all* its freshness and color-brilliancy — yet tough enough to outlast any plane!

Imagine a material light in weight, stainless, non-inflammable, with moisture absorption virtually zero. Can be wiped dry and spotlessly clean in a minute. *And never shows a sign of wear!*

A material that's both a decorator's and a maintenance man's ideal — for colorful, smart, yet eminently practical plane interiors.

That's not a dream. That's **Velon!* — already tried and tested in actual use.

All our production, of course, is now for the government. But remember the name *Velon* — one of tomorrow's vitally important words to every airline, every plane manufacturer.

ANOTHER CONTRIBUTION TO A BETTER WAY OF LIFE *by* **Firestone**

*Trade mark • *pronounced* VEL-LÓN

Multi-Fluid Airbrush 81

This product of **Paasche Airbrush Co.**, Chicago, is made to mix two or more materials in air as they are applied. A prime use is for spraying Latex and



acetic acid. Further, two or more colors may be applied together to produce unusual blended effects, or materials may be sprayed separately to produce two-tone effects when different colors are employed.—**AVIATION, May, '44.**

Work Holder 82

For mounting work rigidly at any angle, Metro Positioner, made by **Metro-Vise Co.**, Detroit, has ball and socket joint and tilts at any compound angle. Devised to be handy for mounting vise or fixture for



checking, milling, drilling (illustrated here), shaping, grinding, welding, pattern making, etc., it is operated by one thumb screw. There are three table sizes: 8 in. x 11 in.; 4 in. x 6 in.; 2¼ in. x 2¼ in.—**AVIATION, May, '44.**

New Sparkplugs 83

For Army aircraft, new sparkplugs offered by **Electric Auto-Lite Co.**, Toledo, feature insulators made from ceramic. Maker states that long life, high mechanical strength and hardness, and high resistance to thermal shock are features of plugs. Left to right in photo: Long reach shielded plug for high-power planes, short reach for lower powered craft, and unshielded for trainers. — **AVIATION, May, '44.**

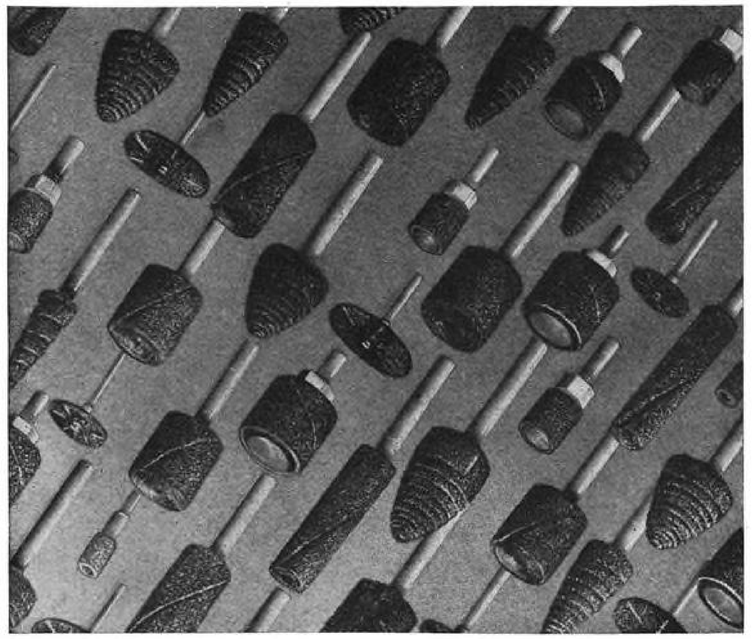

PICTURE THESE AT 20,000 r.p.m.

You can easily sense what these ready-to-use METALITE Cloth Gadgets will do on the business end of your high speed tools compared to a strip around a workman's finger or held loosely in his hand.

At speeds up to 20,000 r. p. m., isn't it obvious that they will do in seconds what now takes minutes by old-fashioned methods?

For burring, putting on radii, getting into all sorts of odd shaped "difficult-to-get-at" places and for many other bothersome, time-consuming operations, METALITE GADGETS will save time and money and contribute greatly to smoother, better production.

But, from the hundreds of sizes, shapes and grits, don't try to pick the one you think will do the job. We'll do better than that for you. A Field Engineer will tell you the best one for each specific operation and demonstrate on the toughest jobs you dig up for him. Simply call our nearest branch.

Boston, Buffalo, Chicago, Cincinnati, Cleveland, Detroit, Grand Rapids, High Point, Indianapolis, Los Angeles, New York, Philadelphia, St. Louis, San Francisco, Tacoma.

BEHR-MANNING · TROY, N.Y.
(DIVISION OF NORTON COMPANY)
RELIABLE COATED ABRASIVES SINCE 1872

Pressure Relief Valve 84

Adjustable, this valve is described as particularly adapted for high pressure systems in aircraft hydraulics. Body is aluminum forging with inner casing of stainless steel. Dashpot is designed to insure smooth operation. Valves are available in three sizes from **American Screw Products,** Los Angeles.—AVIATION, May, '44.

Fuel-Line Valve.....85

New "Arrowmatix" valve is for use in conjunction with highly volatile liquids. Danger of cracking valve body during assembly has been eliminated, states maker, **Davidson Mfg. Co.,** Los Angeles, by making AN thread integral with body (no fittings) and weight is reported reduced without loss of strength. Interior of valve has no projections, in order to reduce vapor formations. Valve is for operation in temperatures from —65 deg. F. to above fuel boiling points. Maximum initial breakout torque ranges between 12 and 18 in./lb., but it is stated only 6 in./lb. torque is required to move valve to open or closed position. Operates on a 90-deg. turn to "on" or "off", with spring detent at both positions. There are three types.—AVIATION, May, '44.

Horsepower Indicator.....86

New aircraft instrument is designed to eliminate numerous calculations of flight engineer through permitting direct reading of both net horsepower and bmep. from same dial, thus giving direct result of adjustments to controls in their effect on output of engine. This horsepower indicator operates from hydraulic-type torque-balance units functioning from planetary propeller reduction gear, giving indication of net shaft horsepower,

also of motor trouble, such as a fouled spark plug. Maker is Kollsman Inst. Div., **Square D Co.,** Elmhurst, N. Y.—AVIATION, May, '44.

Plastic Grommets, Eyelets.....87

Spun acetate grommets and eyelets have been developed by **Precision Paper Tube Co.,** Chicago, for a wide range of uses, many applicable in the aircraft industry. Maker points to factors of insulation, toughness, and resistance of these plastic items. They are made to specification in all wall lengths and diameters and suitable wall thicknesses. —AVIATION, May, '44.

Portable Lifting Table 88

Unit designed to handle dies, to support and level long bars, sheets, frames, etc., and for other applications has simple crank-up mechanism and its flat top table is adjustable to heights from 24 in. to 40 in. so that dies may be slid off to shelves or mountings. Maker, **Barrett-Cravens Co.,** Chicago, offers two sizes, one with table 28 in. x 40 in. with capacity of 3,000 lb. and other with table 24 in. x 32 in., capacity 2,000 lb.—AVIATION, May, '44.

Snap Gage Stand 89

New stand is designed to support roll thread snap gage in secure easy-working position, so that inspector may use both hands on work to be checked. Unit is made in two types. Maker is **Vard, Inc.,** Pasadena, Calif.—AVIATION, May, '44.

Spiral Spring Tester 90

Sheffield Corp., Dayton, Ohio, has developed torsiometer, comparator to provide means of measuring torsion of small spiral springs. Direct reading can be made in millimeter grams on graduated Manross scale. Instrument accommo-

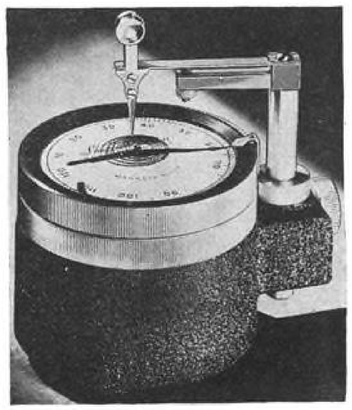

dates springs up to 2¾-in. dia. with maximum torsion measurement of 49.5 millimeter grams.—AVIATION, May, '44.

Emergency

on ACW alloys?

call Ryerson

● Aircraft quality 8630—X4130—4140 alloy steel bars—hot rolled, cold finished and heat treated—in a wide range of sizes—are carried in stock for immediate shipment from Ryerson plants at Chicago, St. Louis, Cincinnati and Jersey City. These steels conform to specifications: AN-S-14a, AN-QQ-S-684a and AN-QQ-S-752a respectively and are readily available to aircraft manufacturers and their subcontractors under the ACW program. A special booklet of stocks on hand, "Aircraft Alloy Steels," including condensed specifications for AMS and AN-S steels, will be sent to you on request.

Other steels at eleven Ryerson plants comprise over 10,000 different kinds, shapes and sizes—everything in steel. Call your nearby Ryerson plant first—for quick action on steel. Joseph T. Ryerson & Son, Inc., Steel-Service Plants at: Chicago, Milwaukee, St. Louis, Detroit, Cleveland, Cincinnati, Buffalo, Boston, Pittsburgh, Philadelphia, Jersey City.

RYERSON STEEL-SERVICE

The Answer ... CURTISS HELLDIVERS

The ANSWER to the Navy's urgent need for deadlier, higher performance dive bombers . . . and to their call for continuous high production of them!

Today, according to the nations press, Curtiss Helldivers, carrying heavier bomb loads further, faster, are delivering their knock-out punches to the Axis. Designed to wreak destruction—mass produced to hasten Peace—powerful opponents to out-perform the enemy's best—here is Curtiss' resounding ANSWER!

Another Contribution of
Curtiss-Wright Corporation
AIRPLANE DIVISION
Toward Winning This War
BUFFALO - COLUMBUS - ST. LOUIS - LOUISVILLE

ADD ANOTHER CHAPTER TO THE HISTORY OF AMERICAN AVIATION

Jet Propulsion

Think you're seeing Buck Rogers' plane? You're not. You are looking at the performance of America's newest fighter—the first jet propelled airplane to be accepted by the United States Army Air Forces.

And with the official announcement of this propellerless plane, a new chapter begins in the history of world aviation.

Now we'll take you behind the scenes and tell you the story of how these planes came into being.

In England there was designed a revolutionary new type of engine which could propel an airplane through the sky by spewing out a terrific blast of air.

The General Electric Company here in America further developed and built engines utilizing this principle.

By choice of both G. E. and the Army Air Forces officials, Bell Aircraft was selected to design and construct planes incorporating this Jet Propulsion engine.

Within two weeks after being notified of this project on September 8, 1941, Bell Aircraft engineers submitted a general arrangement for a new plane housing two Jet Propulsion engines. These designs were immediately accepted by the Army Air Forces.

One year and three weeks later, on October 1, 1942, this revolutionary type of aircraft, exactly on schedule, rose from the flying field at a secret base, climbed into the rarefied atmosphere where a conventional plane loses its efficiency and traveled at high speed.

Now that the story of this new jet propelled plane can be told, Bell Aircraft wishes publicly to express its appreciation to the officers of the Army Air Forces who have contributed so much to this project. We have learned many things which will aid us to pioneer in building safer, better and lower-priced aircraft when peace returns. © Bell Aircraft Corporation.

MEMBER AIRCRAFT WAR PRODUCTION COUNCIL—EAST COAST, INC.

BELL AIRCRAFT

Niagara Frontier Division, Buffalo and Niagara Falls, N. Y.
Ordnance Division, Burlington, Vt.
Georgia Division, Marietta, Ga.

PACEMAKER OF AVIATION PROGRESS

BUY WAR BONDS AND SPEED VICTORY

Lighting System Component.....91

Unit for aircraft lighting systems made by **New York Transformer Co.**, N. Y. C., is stated to weigh only 8 oz. It is designed for very low temperature rise of 30 deg. C. to permit operation over all ambient from –65 deg. C. to 70 deg. C. and at altitudes to 50,000 ft.—**AVIATION, May, '44.**

Offset Tip-Cooled Electrode.....92

Offset spot welding electrode made to be cooled at its tip is announced by **Frostrode Products,** Detroit. Feature is strengthening of structure through having "solid" cross section at point of greatest stress, with cooling liquid entering offset electrode below knee and thence flowing through coolant guide into finned, replaceable "Frostcap" which forms electrode's tip. Function of coolant guide is to concentrate cooling action at vary tip of electrode. Electrode, adaptable to



any standard holder, is available with ⅝ in., ¾ in., or ⅞ in. o.d. Frostcap of hard drawn copper or Mallory 3 metal.—**AVIATION, May, '44.**

Russia's Air Power

(*Continued from page* 123)

The use of wooden construction apparently involves some, but not excessive increases in structural weight. Its resistance to explosive projectiles is poorer, although the damage done by solid projectiles is comparable with that done to duraluminum structures. The extensive use of wood for smaller types of airplanes is apparently dictated by shortages of duraluminum, machinery, and skilled labor.

In early September, our group was flown to a large fighter base on the central front, from which Bell *Airacobras*, Douglas A-20's, and a variety of Russian fighters were being operated. There we were given opportunities to discuss the *Airacobra* with pilots and technicians.

We were introduced to the pilots and technicians of the P-39 squadron at the base. The pilots were apparently about the same age as those performing similar duties in our own AAF, although some of the technicians appeared to be younger and the latter group included several girls. The writer was impressed by the difficulties of performing maintenance operations under combat conditions, with little shelter available in which to work. Since most combat operations take place during the day, it is common to service the airplanes at night.

In discussions which took place with pilots and technicians, we were made acquainted with the good and bad points of the *Airacobra* as operated at that base. Certain difficulties were noted to be peculiar to operating conditions in Russia. Necessity for the use of very high octane fuels was particularly objectionable, since such fuel is not required for Russian-built airplanes and thus presents a special transportation difficulty.

To an American, the entire transportation problem in Russia seems staggering, since few good roads exist between populated places. This puts a very heavy load on the railroads and results in extensive use of transport airplanes to move personnel and light types of equipment. There can be no doubt that the large Lease-Lend exports of all-wheel drive American Army type trucks is of great importance in the success of the recent Russian drives because these vehicles are capable of operation on very poor roads.

It seems probable that in postwar development of the Soviet Union, the transport airplane will play a very important part, inasmuch as the present railroad system is likely to be expanded only where the tonnage to be transported precludes the use of airplanes and highway transportation.

Shortly after returning to Moscow we began another trip, being transported in

PRECISION HYDRAULIC TESTING MACHINE with Pendulum Load Indication

MORE ACCURATE, MORE DEPENDABLE FOR PRODUCTION TESTING because:

Pendulum load indicator operates on the natural laws of gravitation. . . .This principle of operation is not affected by temperature changes or subject to metal fatigue. . . .*Write for descriptive literature and quotations.*

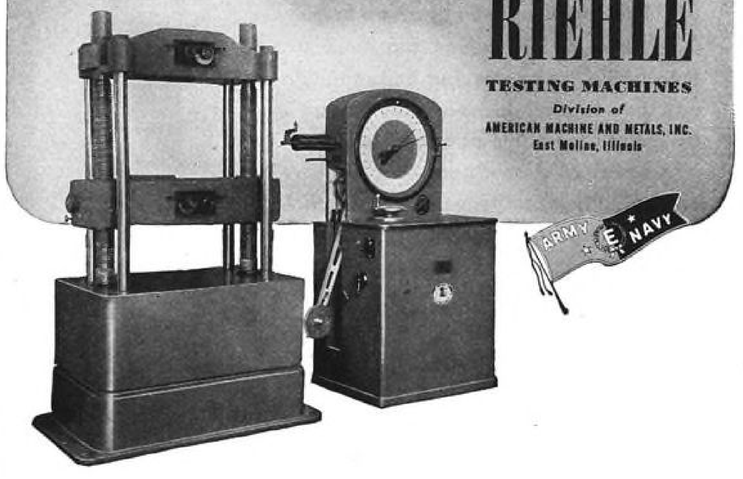

Other Products: IMPACT TESTERS • VICKERS HARDNESS MACHINES • BRINELL HARDNESS TESTERS • MEASURING INSTRUMENTS

The Chosen

RADAR-RADIO QUEEN

YOUR PARTNER IN THIS WAR

Radar-Radio's Pin-Up Queen

More than ever before women have come to the front to play their part in this fight. Dorothy Crisp—since 1942 a worker in the factory at Amphenol—who smiles at you from these pages, typifies and symbolizes the radar-radio woman-power which is effectively taking over war plant jobs. Her skillful hands represent two out of 2500 pairs working daily to maintain the security, dependability and quality behind the name of "Amphenol".

Amphenol's products—connectors, cables, fittings, radio parts—prove their quality in meeting the exacting specifications and laboratory tests called for in AN requirements.

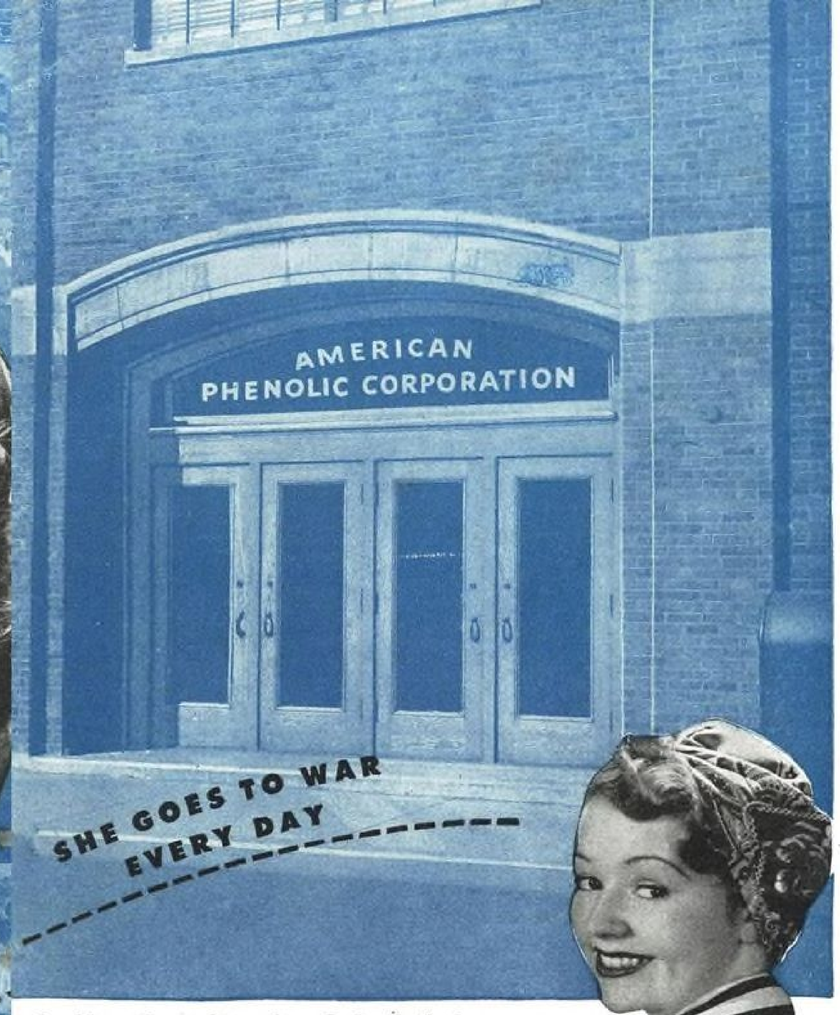

SHE GOES TO WAR EVERY DAY

Send for a Photo of Dorothy — Radar-Radio Queen

All You Need Send is Your Name and Address—Use the Coupon

Pictured here is Dorothy Crisp—a typical wholesome American girl—busy every day on Amphenol's production line. She was chosen first by Amphenol's twenty-five hundred employees as their representative. Then she was picked as Radar-Radio Queen of Chicago's fifty-two radar and radio plants.

Dorothy's smile is offered here, as an encouragement to the army of workers who are using Amphenol products in building the electrical and communications war equipment . . . and to the men in the Armed Forces who are so effectively using that equipment in the field.

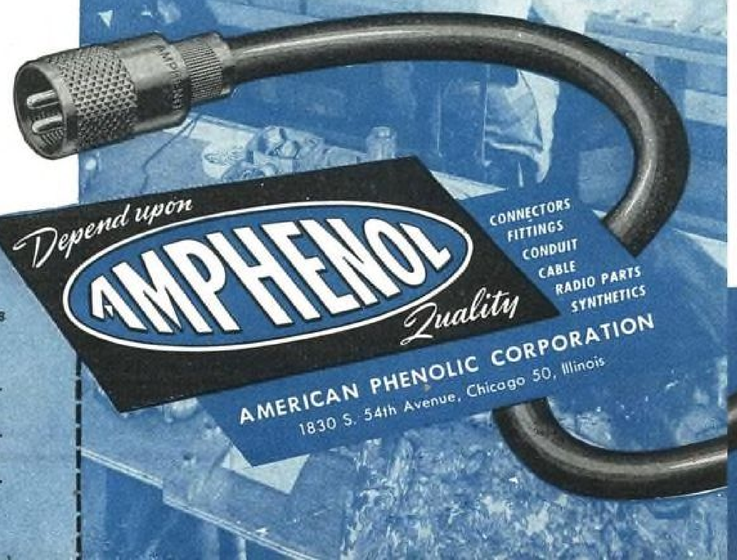

American Phenolic Corporation
1830 S. 54th Ave., Chicago 50, Illinois

I would like to have a photograph of Radar-Radio's Queen and Pin-Up Girl, Dorothy Crisp.

Name ..... *Position* .....

Company .....

Address .....

(D)

a Russian-built Douglas to a training center about 180 mi. away. Here we were acquainted with the best and worst points of the P-39 from the standpoint of the instructor-pilots and local maintenance men. We were able to exchange service information and describe changes that had been made, in order to overcome the maintenance difficulties which the Russians were then experiencing, on airplanes then on the production line. Here again the general impression was gained that the P-39 was performing well.

As has been obvious in our experiences with airplanes that are operated by our AAF, training and combat service often result in differing types of service troubles; for instance, training units have more difficulty with brakes and landing gear. It was noted that Russian technicians, even at advanced bases, usually must make repairs with fewer powered tools than would normally be available to our own technicians.

After returning from the training base, the writer was given the opportunity to discuss design problems with Alexander S. Yakovlev and Prof. Shiskin, the latter a prominent Russian aeronautical engineer, and the former a designer of fighter airplanes who is best known for the Yak-1 fighter and its more recent versions, including the Yak-7 and the Yak-9 mentioned earlier in this article. These are single-engine fighters powered with a liquid-cooled V-12 engine. The Yak-1 was first used in 1941.

We discussed the combination of metal spars with wooden skin and ribs that is used on the Yak-9, in which a thin strip of wood is riveted to the spar caps and the wood covering is then glued to the strip. I was told that the Yak-1 originally had an all-aluminum-alloy wing of conventional construction, but that material shortages had forced a re-design in wood. The present type of construction was adopted after running careful vibration tests of sample parts, and in actual service very little trouble has been experienced.

It was mentioned that flutter speeds were likely to be low for wooden wings. Prof. Shiskin agreed and said that they made an extensive flutter analysis of each new design.

It was indicated that the flight load factors for fighter aircraft that are used by Russian designers are slightly higher than are used for U. S. Army fighter types and that the height of drop for the landing gear is greater. However, no landing load factor is specified but depends upon the shock-strut characteristics.

It is quite likely that we can learn much about front line air warfare from the Soviet Air Forces, which have made very successful use of certain specialized types of airplanes. The most outstanding of these is the *Stormovik*, or I1-2, a very heavily armed and armored single-engine attack airplane. Escorted by fighters, it operates at low levels and deals very effectively with artillery positions, machine gun nests, and tanks. Although relatively slow and not highly maneuverable, its ability to resist the effects of small caliber fire permits it to operate at heights of about 80 ft. from the ground,

YOU should know this plane—credited with sinking "more enemy combatant tonnage than all other *arms* of the services"! It's "Old Faithful," the *Douglas Dauntless* — veteran of Midway, Guadalcanal, the Gilbert and Marshall Islands. In the Solomons, the Dauntless was used to bomb out Jap pill-boxes within a few yards of our own forces — that's *precision bombing* with a vengeance!

Jack of all jobs, the master of most, the Dauntless has paid handsome premiums on the sound design and precision workmanship that kept her fighting when contemporary planes had become obsolete . . . We at Kenyon, with a tradition of precision workmanship, feel privileged to supply tab control units for the hard-hitting Dauntless — one of the many American fighting and cargo planes which have employed Kenyon precision work, from wind-tunnel models to finished parts or instruments. We look forward to performing similar service for the manufacturers of future planes, as well.

War or peace—when you need precision parts or instruments, you can rely on Kenyon to supply them, in quantity and on time — even if they have never been made before!

For Precision Parts . . . Call on Kenyon

KENYON INSTRUMENT CO., INC.

HUNTINGTON, L. I. *If it's Kenyon-made*

NEW YORK *It's precision-built*

DO MORE FOR THE WAR IN '44 — BUY MORE WAR BONDS!

where it is fairly safe from large caliber anti-aircraft installations. Its heavy armor plating forms the forward fuselage structure, and it is equipped with bombs in wing bomb bays, cannon of from 20 mm. to 37 mm., machine guns, and rocket guns.

During the present war, there has been considerable interest among American engineers in Russian aeronautical developments, and several articles have been published dealing with Russian airplanes, though they unfortunately often have contained inaccurate or obsolete information, partly because of language difficulties and the fact that the information was gathered by writers having insufficient technical training.

In postwar years, it is to be hoped that such difficulties can be overcome to the extent that more accurate articles are published dealing with Russian airplanes and with Russian technical progress.

"Packaged" Airports

(*Continued from page* 118)

The largest, or Type D, buildings are developed from Type C structures by addition of a control tower and a wing having space for customs and immigration services, medical examination, and other services in connection with international traffic. This wing can be entirely isolated from the rest of the building so that international passengers can be segregated pending completion of arrival or departure clearances. Type D buildings are developed to handle an uninterrupted flow of traffic in centers up to 100,000 population, for small international airlines, large market centers, feeder and trunk line connecting points, large military bases, or other similar uses.

In a book on packaged airport equipment now being prepared by Westinghouse, four different typical airports are described. The almost-infinite number of combinations available through varied selections of the assemblies make it possible to set up practically any type of landing and service facilities desired in small and medium size airports of current design.

Within the bounds of cautious prediction, we feel nevertheless that the four basic plans have taken future airline development into careful consideration and that they will reflect modern practice in equipment design for some years to come. Due thought has been given to the ever-changing aspects of air transportation and the plans are felt to be flexible enough to permit future expansion or alteration without incurring any very appreciable loss.

Essentials—No Frills

In every case, the airports contain the elements of equipment considered essential to regular and successful operation, but for economy no useless "frills" have been included. In each case, to make sure of completeness, it has been assumed that electric power is not available at the location, that night flying will be done, that full facilities will be needed for radio beacon, ground-to-plane, and airport-to-

How much PUNISHMENT can they take?

IT'S AN unknown quantity in men

fighting against odds. In the crucial moments, we only know it takes all they've got to come through. *How much* they've got is the measure of their endurance and heroism. . . But in hollow screws, the measure of endurance is taken scientifically in the Allen laboratory.

Here, Allen screws must prove *exactly* how much punishment they can take. It's registered on the dials of testing machines, — testing for tensile strength, for yield point, elongation, reduction of area, Izod impact and Rockwell hardness. Your Industrial Distributor sells the screws that *come through!*

THE ALLEN MANUFACTURING COMPANY
HARTFORD, ★ ALLEN ★ CONNECTICUT, U.S.A.

STILL GOING STRONG

LONG, UNINTERRUPTED service under all operating conditions is the characteristic you want most in a capacitor. Tobe Capacitors serve so well and so long because every step in their manufacture is checked and cross-checked by rigid inspections. Constant improvement through constant research is the promise performed by Tobe engineers. An example is the Tobe CA-255 Capacitor, shown below, now available in a new drawn container of improved construction. Why not call on Tobe for prompt, specialized help on your capacitor problems?

OLD FAITHFUL GEYSER, Yellowstone National Park. Geologists believe it began erupting before the last glaciation, about a million years ago. Within record, Old Faithful has erupted continuously at about 65-minute intervals, spouting a column of water 95—130 feet high for 4½ minutes.

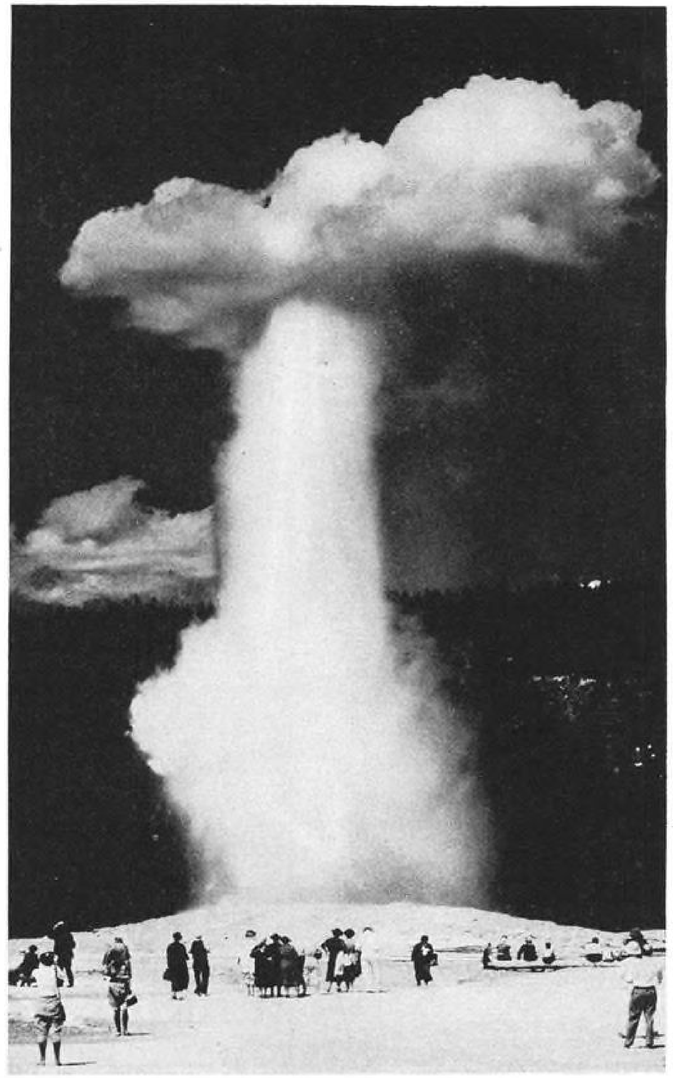

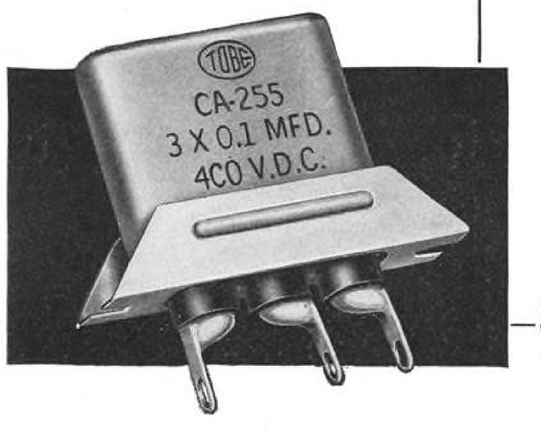

SPECIFICATIONS—CA-255

Mineral Oil Impregnated and Filled. Aluminum Foil. Highest Grade Kraft Tissue.

CAPACITY RATING..... 3 x .1 mfd.
VOLTAGE (working)..... 400 V. D. C.
DIMENSIONS: 1 11/16" wide; 9/16" deep; 2 7/16" long, including channel mounting bracket. Mounting centers 2⅛". Three terminals ½" on centers. Height of terminal ¾". Diameter of mounting holes, .144.

FEATURES: Rugged Channel Mounting Bracket securely soldered to container . . . Increased terminal insulation . . . Rigid terminal lugs afford ample space to handle No. 14 stranded wire . . . Improved streamlined drawn container instead of fabricated can . . . Type, capacity and voltage die-stamped on container. Meets U. S. Army Signal Corps Specifications 71-516-E.

Other values and voltages may be obtained in above mentioned container construction. Send for details of our "OM" and "OD" Capacitors.

TOBE DEUTSCHMANN CORP. TOBE CANTON · MASSACHUSETTS

A small part in Victory today...

A BIG PART IN INDUSTRY TOMORROW!

airport communication, and that meteorological data are not otherwise available at the site.

As developed by Westinghouse there are seven distinct advantages to the packaged airport. First, speed is obtained by eliminating tedious engineering for setting up drawings and bills of materials, purchasing, negotiations, routine follow-ups, and other detailed work. Second, our engineers have developed new packaged assemblies for many materials used in airports, and they have built new units that will result in great simplification. Third, we recognize the changing nature of the whole air transport picture with consequent need for flexibility, so that all materials included in the packaged assemblies may be enlarged, modified, or shifted from airport to airport without grave loss.

Fourth, purchase and shipments are consolidated. Westinghouse gathers at consolidation warehouses all materials into their proper assemblies for unit shipment, thus the purchaser deals with but a single supply source and has no awkward waits for missing installation parts. Fifth, shipments are facilitated. The packaged material has been studied carefully to make shipping easy; packaged airports can be moved entirely by air if necessary. Sixth, field erection and maintenance are kept as simple as possible. Materials and equipment have been chosen with the thought always in mind that erection and maintenance problems might readily impose serious difficulties. Westinghouse International furnishes instructions covering erection and maintenance of all materials, and it has tried to simplify these tasks to the utmost.

Seventh, but far from least important, is the matter of cost, which packaged airport equipment lowers materially. This is accomplished in part by elimination of a great deal of field work, piecemeal engineering, costly delays due to missing parts, and routine follow-ups. We believe these, coupled with the advantages of mass purchasing, bring the ultimate cost of the installed airport to a level considerably below that possible by other means.

Market Research

(Continued from page 124)

Even though there be a reaction against such spending, it is obvious we will need thousands of planes for self protection, for training new pilots and, just as important, for research. The fallacy of building but a few hundred planes each peacetime year for military purposes has been demonstrated, but the final make-up and size of the standing force must await the peace and the solutions to the factors noted above.

The transport market can more easily be evaluated for contemplated domestic commercial expansion, since it is already in its formulative stage.

Basically the market study procedure calls upon the researcher to—

1. Survey and analyze each domestic airline operating company as to present

SCREENING MEN MATERIALS AND MACHINES

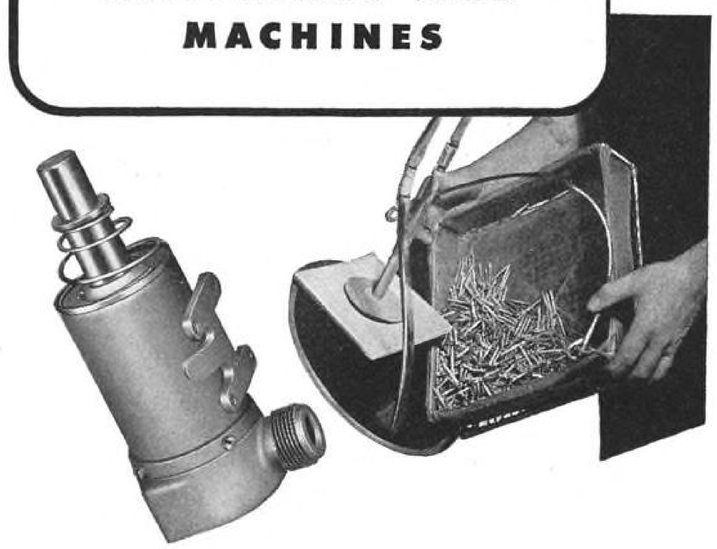

Cannon Quality Control operates to eliminate failure wherever it may be found. It is a continuous "screening" process that grades out materials that do not measure up to critical standards—that scraps malfunctioning tools, jigs, machinery and equipment—that shifts men and women to the jobs they are best suited to handle.

It's relentless in the way it operates but it results in a product that we are glad to trade-mark and on which you can depend. Cannon plugs are good plugs because all the elements that go into them—men, materials and machines—are good.

VISUAL AIDS FOLDER

The many visual training aids offered by Cannon Electric include wall charts, training films and engineering bulletins. These are listed and described in a new four page folder, available on request. Address Dept. A-110, Cannon Electric Development Company, 3209 Humboldt Street, Los Angeles 31, California.

CANNON ELECTRIC

Cannon Electric Development Co.
Los Angeles 31, California

Canadian Factory and Engineering Office:
Cannon Electric Company, Limited, Toronto

Representatives in principal cities—Consult your local telephone book

MOTORIZED TEMPERATURE CONTROLS AND SERVO MOTORS FOR AIRCRAFT

Provide remote, automatic control of aircraft flight operations:

- ...for cabin heating control
- ...for anti-ice temperature control
- ...for carburetor mixture control
- ...for carburetor intake air temperature control
- ...Servo throttle motor
- ...Servo torque motor

Manufacturers' requests for engineering data and application information are invited.

★

LET'S GO! U.S.A. KEEP 'EM FLYING!

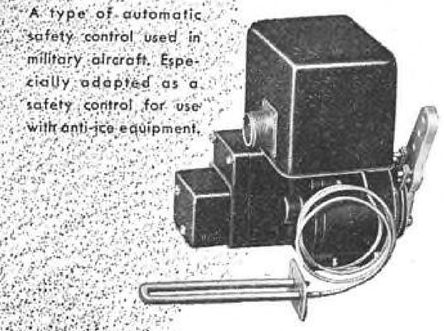

A type of automatic safety control used in military aircraft. Especially adapted as a safety control for use with anti-ice equipment.



Motorized temperature modulating control for maintenance of cabin or cockpit temperature. Also carburetor air temperature and similar applications requiring close control.

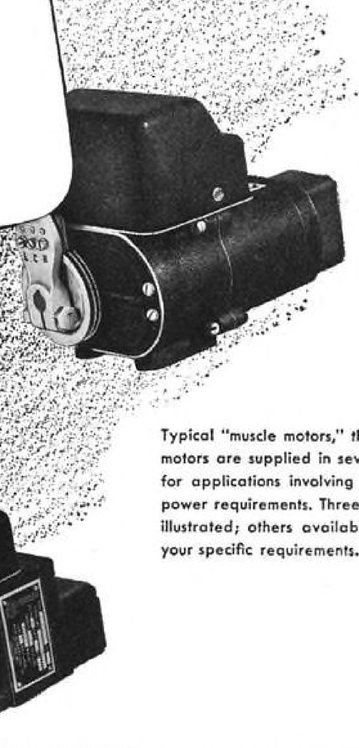

Typical "muscle motors," these Servo motors are supplied in several types for applications involving additional power requirements. Three types are illustrated; others available to meet your specific requirements.

WHITE-RODGERS ELECTRIC CO.

SAINT LOUIS, MO.

equipment and projected expansion plans for equipment for the postwar period.

2. Survey and analyze each American-operated international airline company as to present equipment and projected expansion plans for the postwar period.

3. Survey and analyze fixed base operators as to present equipment and plans for contemplated expansion in the postwar period.

4. Survey and analyze foreign-operated airlines for new equipment and make contact with their representatives in the United States as to plans for new equipment and for resumption and expansion of service in the postwar period.

From this data an area survey of specific territories can be formulated to give a detailed blueprint of the market covering virtually all customers and prospects and classifying them into groups in accordance with their potential value to the manufacturer.

Comparison of this analysis with past company sales clearly indicates where additional business must come from if the company position is to be substantially improved.

An area survey serves as a basis for sales planning and coverage of potential accounts with a full analysis of background and potential as it exists for definite areas.

The personal plane market requires more study and research, as the past market has been exceedingly meager.

Nearly all students of economics, and others who have given considerable thought to postwar marketing, agree that there will be a period of great prosperity immediately following the war. There will be ample purchasing power in the hands of the public—a pent-up demand estimated at $135 billion, with $104 billion expected to be available for immediate spending, plenty of plant capacity to produce planes, and adequately trained labor to use all the productive capacity which will be available. Should the war end in 1945 or 1946, the American public will have the greatest accumulation of unused buying power in its history.

The great expansion in war production has been reflected in an unprecedented rise in national income. Department of Commerce estimates put the 1943 national income at an all-time high of $147 billion— an $89.2 billion increase over 1940 and $97.5 billion over 1934. Although all major types of income have shared in this increase, by far the greatest gain occurred in wage and salary payments, representing 73 percent of the national income.

Planning for the personal plane market should begin with the premise that no experience or statistics of the past can serve as a reliable blueprint for the future. Management is then required to take a critical attitude toward its policies, an attitude which involves an unwillingness to assume the validity of past practices or the wisdom of continuing them.

The procedure can then be made simple and practical by—

1. Stripping away generalities which fail to suggest positive action.

2. Reducing to their proper stature of

Your Technical Command—

After the war, many a man wearing wings will want to go on as an independent air force. The private flier will be again free to use the airways. And Air Associates once more will be theirs to command for anything a plane needs, wherever it flies. Whether custom built Constellation, recommissioned "grasshopper" or a home talent job . . . the owners will get the same conscientious care and prompt delivery that Air Associates has given every order since 1927 . . . Remember, too, that our postwar resources will comprise not only standard stocks but many exclusive items and specialties of our own design and manufacture.

• *Air Associates' postwar catalogs will carry a valuable franchise for future business. Manufacturers are invited to discuss the listing of their lines now.*

• AIR ASSOCIATES, INC.

TETERBORO, N. J. . . . *BRANCHES:* CHICAGO, DALLAS, LOS ANGELES . . .
ENGINEERS & MANUFACTURERS OF AIRCRAFT SPECIALTIES . . .
SUPPLIERS OF ALL TYPES OF MATERIALS TO THE INDUSTRY SINCE 1927

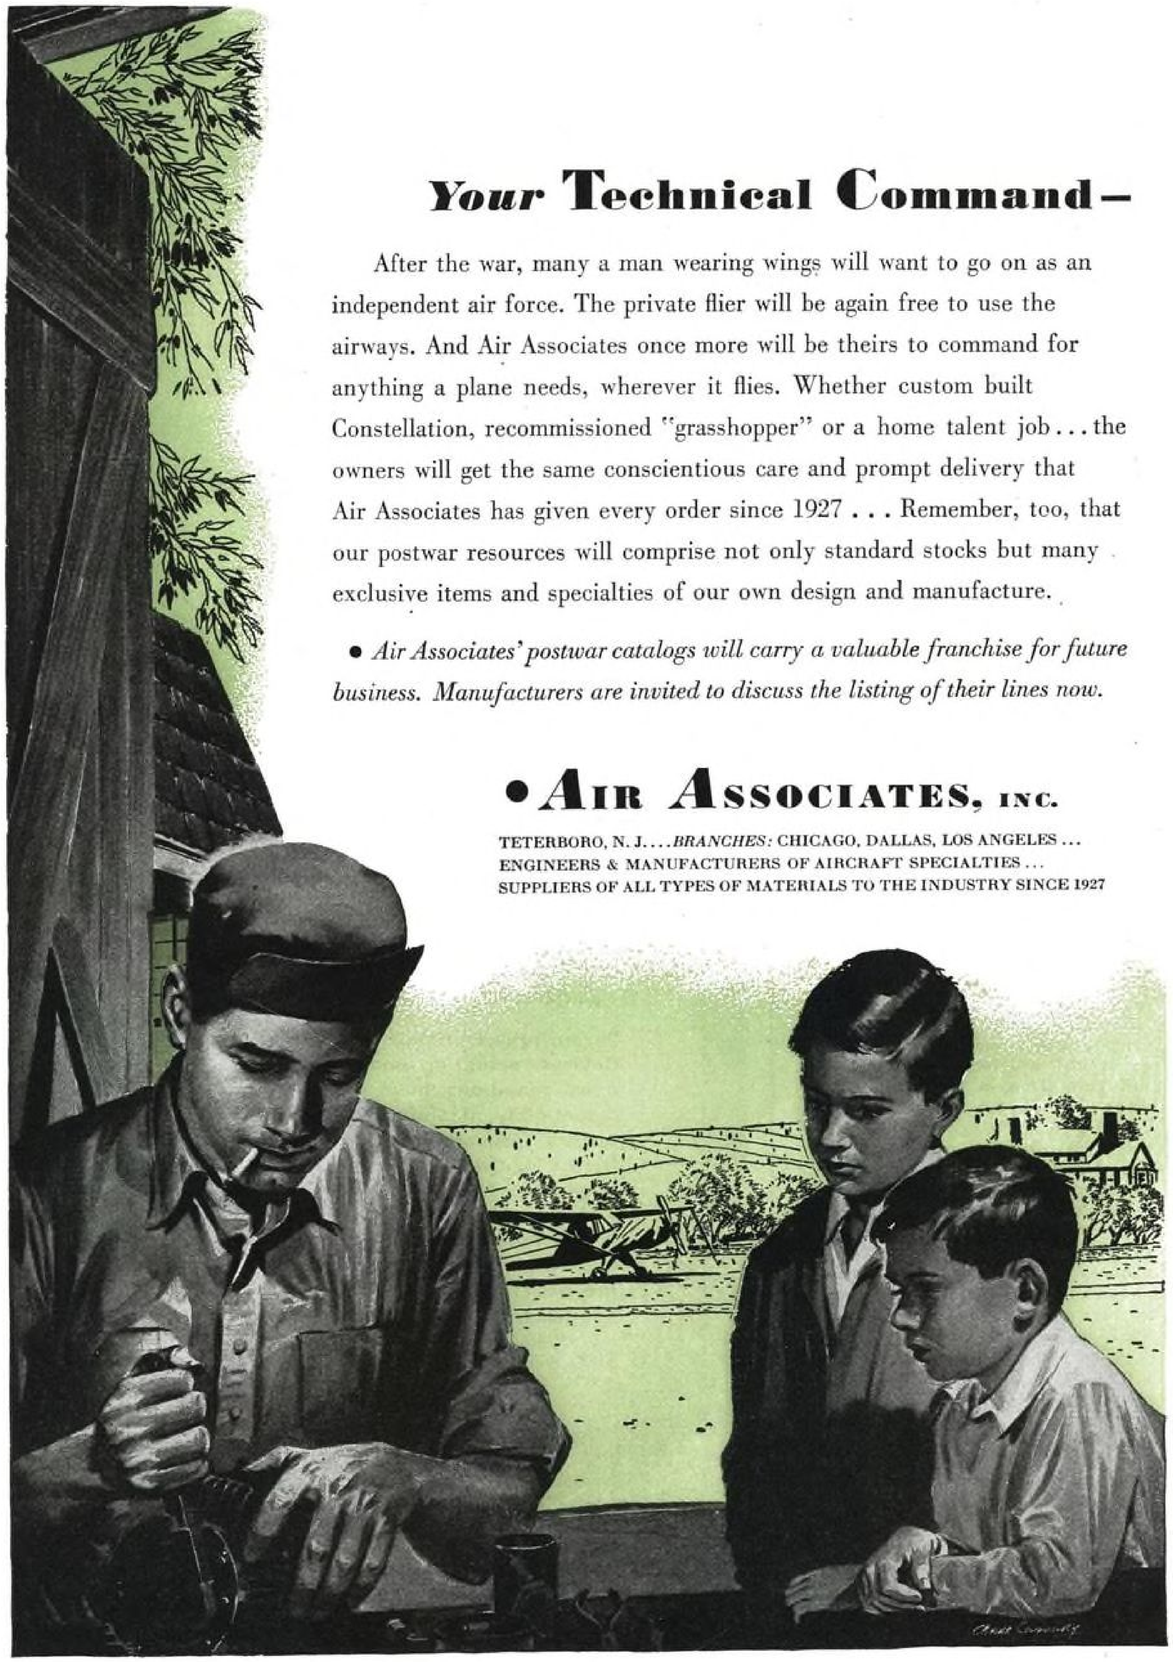

importance and probability the various alarming aspects of the postwar aviation manufacturing business which are amplified by some interests to make political issues.

3. Collating for examination the specific conditions under which the individual business may expect to operate after the war.

4. Distinguishing circumstances which can be controlled from those not susceptible to control, so that no time or energy are wasted on things that the individual alone cannot correct.

5. Bringing into sharp perspective the conditions which are favorable and should be capitalized on, and those which are detrimental and should be counteracted.

Postwar personal plane market planning must, in addition, be adaptable to change. This flexibility to conform to a new "aviation climate", and willingness to compromise, are fundamental to making plans now for taking advantage of favorable developments.

A few of the general factors which the personal plane manufacturer must consider in postwar planning to assure most efficient conversion to peacetime operations are reflected in the following questions:

1. From what classes of customers does the sales department expect to obtain its postwar orders? How many salesmen will it require, and where should they be stationed?

2. What changes in sales methods should be contemplated, and if so, what plans are being made to put these into effect as soon as possible?

3. What types of planes must be available for sales as soon as possible after the war is over? How soon must engineering or design departments start work on such planes before they can be put into production? What plans are being made to set aside men for development or designing of such planes?

4. What plans are being made to convert plants to peace-time production, and how soon can plans be available so they may be put into execution without delay?

5. What will be the volume of private flying? It is to be noted that determination of those who will be interested in purchasing depends on quantitative analysis for basic production programs. To this end analysis of the following five points should be given careful consideration:

a. Cost, utility, and safety of plane or planes under consideration.
b. Landing facilities in territory where plane is to be used.
c. Attitude of the federal government on regulations which will affect construction and operation of planes and also the individuals who fly them.
d. Approximate number of individuals whose interest has been aroused by direct contact with aviation, either in the aircraft industry or in service.

Analysis of the export market will depend to a great extent on what is done with surplus military aircraft. How-

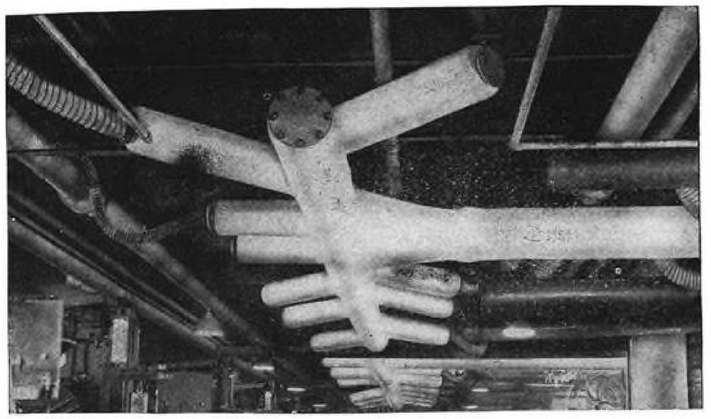

Skill Counts in Making a Product Like This

From coast to coast in the plants of major manufacturers, the plant analysts from Pressed Steel Company are well known and welcome. Above is a photograph of actual installation of an Alloy Exhaust Manifold, made for a noted car manufacturer. This Manifold carries exhaust gasses and fumes from motor testing blocks: another of the highly technical and complicated products we manufacture and of which are are justly proud.

CARBURIZING and ANNEALING EQUIPMENT



We are geared to give you Heat Treating equipment that will reduce manufacturing costs and increase production. We are pioneers in the manufacture and distribution of Lightweight Carburizing and Annealing Equipment — built in all sizes and to any specifications.

THE PRESSED STEEL COMPANY
of WILKES-BARRE, PENNSYLVANIA

BRANCH OFFICES: 312 Curtis Bldg., Detroit; 606 Nicholas Bldg., Toledo; 1915 Engineers Bldg., Chicago; 51 E. 42nd St., New York; 415 Petroleum Bldg., Houston, Texas; A & M Accessories Ltd., 19 Melinda St., Toronto, Canada

PRESSED STEEL COMPANY PRODUCTS: Carburizing and Annealing Boxes, Thermocouple Protection Tubes, Seamless Steel Cylinder Caps, Seamless Steel Neck Rings, Welded Alloy Tubing for High Temperature and Corrosive Application, Radient Tubes, Inner Covers and Base Sheathes for Steel Mills

A TWIST OF YOUR FINGERS— MAKES A TON-TIGHT* SEAL

LOSS of tire air pressure, means extra tire wear, and added cost to your customers. But you can help cut this loss, and keep their cars rolling, by applying a Sealing Valve Cap to every tire serviced.

Schrader Sealing Valve Caps screwed down finger-tight, are designed to maintain a positive seal. This seal keeps air pressure in and keeps dirt out. Vibration will not loosen the cap. It will not work off.

To help conserve your customers' valuable rubber do these three things:

First: Make sure every tire you service is equipped with a Schrader Sealing Valve Cap.

Second: Whenever you check tire pressures, *replace* the Valve Caps.

Third: Tell your customers why you are applying Schrader Valve Caps. It means dollars saved in additional tire mileage and prevents hours of roadside delay.

SCHRADER FEATURES

1. Valve Cap body or shell.
2. Brass Swivel Plate allows Cap Shell to turn independently of rubber washer as Cap is applied. This assures proper seating of washer and prevents distortion.
3. Brass Dome-Shaped Plate provides an Indestructible chamber for safe clearance of valve core pin.
4. Molded Rubber Washer seals valve mouth when Cap is screwed on firmly by hand; while rubber between brass plates 2 and 3 provides spring action to maintain positive seal.

*When a Schrader Sealing Valve Cap is tightened with full finger strength, a downward force of about 50 pounds is exerted against the top of the valve mouth. The actual effective contact surface between cap washer and valve mouth is about 1/40 of a square inch. Multiplying 50 pounds by 40 gives the equivalent per-square-inch pressure—2,000 pounds.

Schrader
REG. U.S. PAT. OFF.
CONTROLS THE AIR

ARMY E NAVY

SCHRADER TIRE VALVE CAPS
Guaranteed Air-Tight Up to 250 Pounds Pressure

A. SCHRADER'S SON, *Division of Scovill Manufacturing Company, Incorporated,* **BROOKLYN, NEW YORK**

ever, consideration should be given to the whole broad question of postwar export markets. American planes will be in great demand all over the world until foreign competition again has plant facilities. For a short time—possibly three to five years—we will be able to go anywhere and sell on favorable terms within whatever framework of export financing may then be available, if surplus is properly disposed of. What the U. S. does and how it handles itself in this time will mean a great deal later. We can cultivate friends by fair dealing or we can alienate customers by sharp practices. If we really want to hold export markets we must cultivate them just as assiduously as we cultivate domestic markets. We must study them and learn how to do business in them as Europe has done. Again this is a job for market research, for if the effort at cultivation is to be on a long-time profit basis, it cannot be hit or miss.

Obsolescence will become an increasing factor in determining the total volume of export production impelled by the foreign desire for improved models. A corollary result will be greater emphasis on the ways and means of disposing of used surplus military aircraft.

What should be some of the broad objectives of postwar aviation for all business concerns?

Few sound business decisions of real importance can be made until responsible executives have before them the best possible figures on such elements as:

1. Potential sales or gross returns from the project.
2. Appraisal of the domestic and export aviation market to be entered—its size and possibilities for expansion.
3. A schedule of the preparatory work to be done—by whom and at what expense.
4. Total investment required—when and for what.
5. Production or operating costs.
6. Marketing methods and costs.
7. Administrative time and costs.
8. A timetable and budget of outlays in comparison with revenue.
9. Projected profits at various levels and under various conditions.

How to make long range plans definite, in spite of all the uncertainties as to what the postwar world will be like, is one of the baffling problems of many companies. The only practical line of attack, to the best of our knowledge, is to apply the principle called "concentric planning." This involves careful estimating for each or several hypothetical situations and perhaps for a variety of conditions directly affecting the project, but the end result will be definite figures on which to make plans. This calls for more than annual, or short form figures, for a more complete picture must be portrayed for long-term projection. Therefore, a backlog of expected business to be accumulated for a five-year period to 1950 should be used. From this figure one can arrive at an average annual demand based upon anyone's guess as to the date the war will end. At the same time, the long-term

Ideal Working Conditions Sealed in with

CLARE Type "K" RELAY

Assure Perfect Operation at Any Altitude

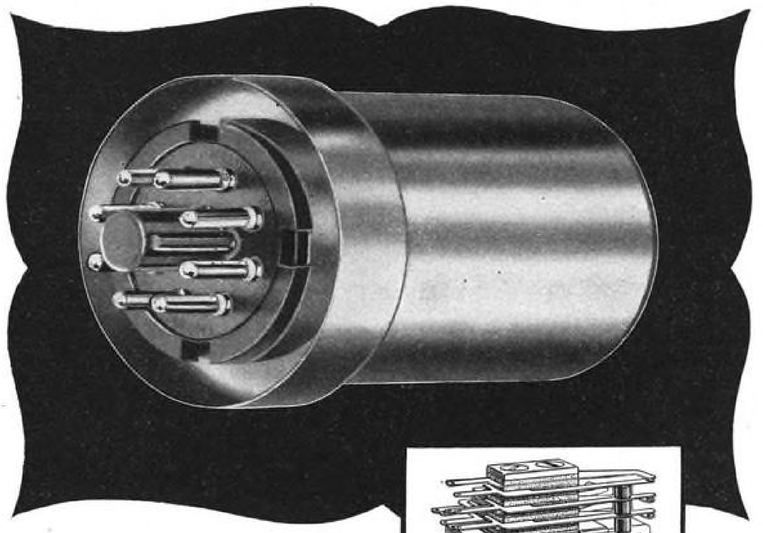





Strong, hard, long wearing Bakelite bushing insulators resist vibration and heavy contact pressures.

Heelpiece of magnetic metal, carefully annealed.

Hinge of "fatigueless" beryllium copper insures long life under vibration.



Nickel contact springs to which contacts are overall welded by special process.

The Clare Type "K" is a precise, small relay widely used in aircraft where inches and ounces are important.

Now Clare offers you this relay, which can be "custom-built" to your exact requirements, sealed into its own sphere of laboratory-controlled working conditions, unchanged at high altitudes or sea level. According to requirements, dry air or inert gas may be sealed in. Dimensions of sealed relay are $2^{11}/_{32}$" long by $1^{21}/_{32}$" wide.

The Clare Type "K" Relay, measuring only $1\frac{1}{2}$"x $1\frac{1}{4}$-x$^{13}/_{16}$", is especially designed for applications incident to vibration—no anti-vibration springs are needed. There are no bearings to rattle loose. Uniform armature movement is maintained by the use of a "fatigueless" beryllium copper hinge, heat-treated and designed to provide a wide margin of safety.

Permanent assembly tightness is secured by binding the spring pile-ups under hydraulic pressure and then tightening to the heelpiece. A coating of Glyptol is an added precaution.

Like all Clare Relays, the Type "K" is "custom-built" to meet your specifications. Now "custom-building" can also provide this relay with ideal conditions sealed in, to assure perfect operation at any altitude.

Let our engineers "custom-build" a relay to meet your requirements. Send for the Clare catalog and data book. C. P. Clare & Company, 4719 W. Sunnyside Ave., Chicago (30), Ill. Sales engineers in all principal cities. Cable address: CLARELAY.

CLARE RELAYS

"CUSTOM-BUILT" Multiple Contact Relays for Electrical, Electronic and Industrial Use

More Parts Per Broach The *American* Way—

PROVEN in war... Ready for PEACE

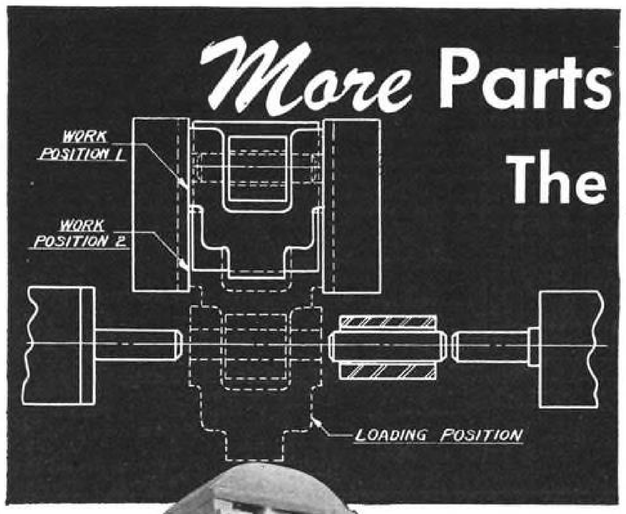

Drawing illustrates sliding work table with two selective work positions. During the machine cycle the part is hydraulically located, locked in position, broached and returned to loading position where the locating pin is removed.

Precision work at a mass production rate—*plus* the extra economy of doubled output per broach sharpening!

This is a typical example of the application of *American's* complete broaching service to a production problem. American Broach & Machine Company engineers set up this operation to finish the sides of universal joint yokes.

An American SB-42-10 surface broaching machine is used, equipped with a special receding table incorporating two selective work positions. Extra wide broaches, more than twice the part width, make possible the use of one half of the broaching surface at a time. When this half becomes dull the position may be changed so that the remaining half continues the operation. Twice the number of parts per broach sharpening are obtained, reducing production cost and time, maintaining exceptional finish and accuracy!

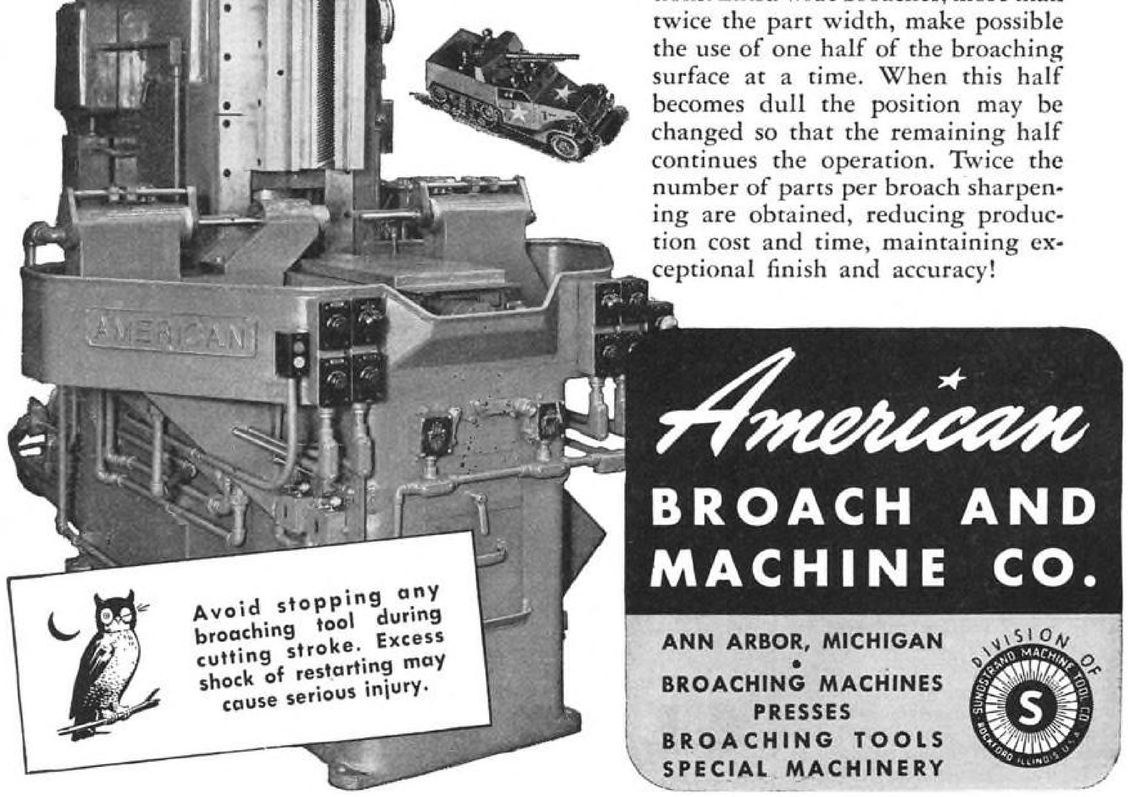

Avoid stopping any broaching tool during cutting stroke. Excess shock of restarting may cause serious injury.

American BROACH AND MACHINE CO.

ANN ARBOR, MICHIGAN

BROACHING MACHINES
PRESSES
BROACHING TOOLS
SPECIAL MACHINERY

DIVISION OF SUNDSTRAND MACHINE TOOL CO. ROCKFORD ILLINOIS U.S.A.

demand will be governed by factors that may be measured with a reasonable degree of accuracy.

Two types of markets then can be distinguished for the aviation industry: Replacement demand, and the potential new market. The crux of the situation lies in the hands of the market research man—it is he who must show the employer how great is the demand, for it is self-evident that full employment, industry by industry, must be balanced against demand. How to achieve this goal and how to hold it is market research's real job.

Precision Angle Plates

(*Continued from page* 161)

inspecting parts with compound angles. This device (Fig. 6) is an assembly of three rectangular plates made of cast iron —a base plate, a middle plate (above the base plate and hinged to it lengthwise), and a top plate hinged laterally to the middle plate. It is known as the Magnasine.

This alternate zigzag arrangement in hinging permits adjustment to allow the middle plate to open 45 deg. at an angle to the base surface and to allow the top plate to open conterminally at an angle to the middle plate surface. The compound angle determinant is fastened to the fore edge of the top plate with socket headset-screws. The angle plate has double friction locks on both plates.

Setting to an angle is accomplished by pivoting the sine bar to the specified angle and locking it in position with the wing nut on the rocker arm bolt, then setting the opposite angle merely by lifting the top angle plate and then the second angle plate until the sine bar is parallel to the base plate. After the specified angle is determined, the plates are locked in position and the job is set. In some cases the set-up is made by raising the top plate to one angle and the bottom plate to the other angle.

Ballot for Flying Boat

(*Continued from page* 121)

Where L is the payload in tons (from Fig. 1) allowing for reserve fuel amounting to 30 percent in range.

The formulas developed above are simple but accurately comparative and can be used to prepare similar analyses of other aircraft types. Employing these formulas with the arbitrary figures set forth above, we arrive at a direct *cost-per ton-mile* comparison of the economy of operation of our large flying boat and our large high-altitude land plane, each grossing 175,000 lb.†

(*Turn to page* 267)

† Two major factors inherent in airline costs have not been considered; these factors are payload factors (usually taken at 65 percent) and management and executive overhead (usually considered to be 80 percent). Therefore, if quantitative estimates are an object of the analysis, the totals computed above should be increased by a factor of:

$$\frac{1}{.65 \times .80} = 1.93.$$

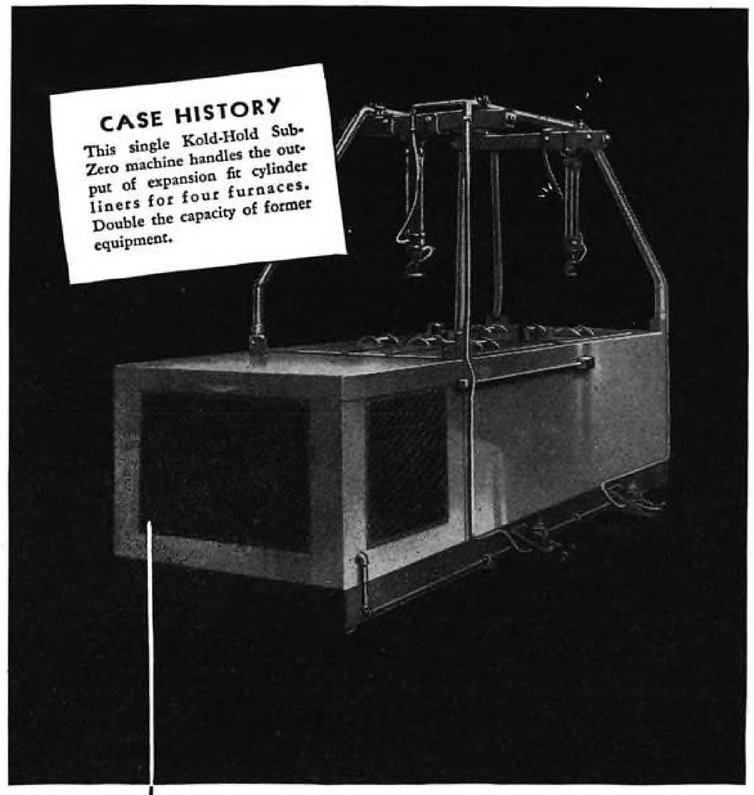

Productioneered

BY KOLD-HOLD

Typical of Kold-Hold "Productioneering for Industry" is this experience of a large automotive and aviation manufacturer (name on request).

Faced with a tough, costly bottleneck, Kold-Hold "productioneered" a cold processing unit to fit the manufacturer's problem . . . the results were — production per hour doubled, serious bottleneck broken, closer fits attained and distortion eliminated. This is an outstanding Kold-Hold "productioneering" performance.

Maybe you have a similar "toughie." A look through our catalog, S-Z 431, may show you a machine that will fit your cold temperature application. Tell us about it and we'll help you "productioneer" your production problem. Kold-Hold machines over a range of from —100° to +200° on capacities from 2 to 400 cubic feet. If pressure and humidity control are required, we have them, too.

KOLD-HOLD

**Engineered for Production*

442 NORTH GRAND AVENUE • LANSING 4, MICHIGAN

World's Oddest Oilcan!

An adaptation of a hypodermic needle is used to meter an *exact amount* of oil into tiny New Departure ball bearings.

This is only one of the many painstaking steps in the manufacture of perfect instrument bearings. *Why such care?*

Because ball bearings, small and large, carry a heavy wartime responsibility. Everywhere you look you'll find them doing absolutely vital work. Indeed . . . one reason for the success of Allied aircraft and other war equipment is the long life and accuracy of the ball bearings used. It is New Departure's privilege to play the lead in wartime production of ball bearings. It has an ability *to get things done,* even under the most difficult conditions. These qualities will prove increasingly helpful to all manufacturers who have ball bearing problems.

Nothing Rolls Like a Ball

NEW DEPARTURE

BALL BEARINGS

3249

NEW DEPARTURE • DIVISION OF GENERAL MOTORS • BRISTOL, CONNECTICUT

Sales Branches: DETROIT, G. M. Bldg., *Trinity 2-4700* • CHICAGO, 230 N. Michigan Ave., *State 5454* • LOS ANGELES, 5035 Gifford Ave., *Kimball 7161*

HERE two hollow rib-reinforced steel forgings begin to assume the subtle contours of Aeroprop propeller blades. They are being shaped on one of the many machines especially designed to mass-produce a new idea in propeller design—a propeller with hollow, rib-reinforced steel blades—a propeller unit-constructed for easy maintenance—a propeller combining all of the qualities of strength, lightness, and simplicity—a propeller less than three years old, yet famous today on every fighting front —the AEROPROP.

Today, thousands of Aeroprops are in service as thousands more move down production lines to take their places on new swarms of Allied fighters. That this has been accomplished in so short a time is further proof that America's skilled workers and production-wise machinery is an enormously resourceful and productive combination.

Today this combination is shaping Aeroprops for war, and for nothing else. When it's won these men and these machines will continue their leadership in the design and construction of modern propellers. Their job then, as now, will be to shape the progress of the conquest of the skies.

KEEP 'EM FLYING! BUY BONDS!

Aeroprop

In War and Peace, Propeller Production at its Best!

AEROPRODUCTS DIVISION • GENERAL MOTORS CORPORATION • DAYTON, OHIO

"I got my choice of two bumper crops!"

Here's not one, but *two* right answers on how to get more power bits for less!

FIRST, you can use the regular Apex-Phillips screw driver bits, and when they get worn just send 'em back to the factory and have 'em reconditioned. The cost is a small fraction . . . generally less than one-third . . . of the new bit price. AND renewed Apex bits are good as new, which is plenty good, because they're made of fine steel, heat treated for the right combination of strength and hardness. Get the full story in Catalog No. 15.

OR you can use the new Insert Type Apex bits, with Apex holders. Holders are supplied to fit practically every type and make of power driver. And the holders accommodate the short, money-saving, steel-saving bits in a full range of sizes. You trim your inventory because a few bit sizes fit all holders. You save substantial money. Get the facts in Bulletin No. 102. So take your choice, and either way, make it Apex-Phillips screw driver bits.

APEX

THE APEX MACHINE & TOOL COMPANY • DAYTON 2, OHIO

Fig. 3 presents this evaluation graphically. It clearly indicates that the flying boat cannot be overlooked in the development of our future international air transport equipment—for the simple reason that, in the hands of a farsighted and competent operator, it will provide the public with the cheapest form of global air transportation. For example, at the very representative range of 3,000 mi., the operating cost of the land plane will be *62 percent more per ton-mile* than that of the flying boat.

The impetus given the land plane by this war will inevitably lead to a surge or boom in land plane air transport operation following the cessation of hostilities. However, it is the studied opinion of this writer, and of others in agreement with the economic evaluation presented above, that "dollars and cents" considerations will ultimately force recognition of the flying boat's rightful place in the air transport industry.

Precipitation Static

(*Continued from page* 153)

Noise Limiter Circuits

An F-M receiver incorporates a circuit (called the "limiter") as a regular part of the receiver. It is the function of this stage to "limit" the amplitude variations of the signal entering the detector or demodulation stage. It is this stage which is primarily responsible for making the F-M receiver non-responsive to amplitude variations.

An amplitude-modulation receiver cannot have such a stage; otherwise the A-M signal would also be eliminated along with the noise. There are, however, certain forms of limiters which may be applied to an A-M receiver which will reduce the effects of sudden crashes or unusually high noise voltages which may appear along with the signal.

Most of these limiter circuits introduce some distortion. However, in many noise fields the distortion is far less objectionable than the noise. Consolidated Vultee has conducted an investigation of several types of noise limiters. The most effective for the crash type of static noise is the Wasmansdorff silencer circuit.[6]

The limiters are not particularly effective in eliminating the effects of precipitation-static. However, they do greatly aid in the operator's comfort in reducing listening fatigue and eliminating the severity of sudden crash noises.

Conclusion

Many people and organizations in this country are conducting investigations of this phenomenon. It is anticipated that there will soon be sufficient information and facts accumulated to effect a real solution to this problem.

It is probable that the result of the intensified investigation which is now being made of precipitation-static will be the development of: (1) A method of treating the airplane which will reduce the accumulation of electric charge; (2) a device for the continuous discharge or draining off of the accumulated charge in such a manner as to minimize or eliminate radio interference from this source; (3) a superior noise reduction antenna, which will probably be of the shielded loop variety; and (4) a radio receiver which is considerably less sensitive to all types of noise.

[6] Welge, V.—Investigation of Radio Noise Limiters, Consolidated Vultee Aircraft Corp. Report No. ZM-165.

Additional References

7. Grote, Reber—Cosmic Static, Proc. I.R.E., Feb., 1940.
8. Breitwieser, C. J.—Radio Noise Elimination Manual, Consolidated Vultee Aircraft Corp. Report No. ZM-062.
9. Aggers, C. V., Foster, D. E., Young, C. S.—Instruments & Methods of Measuring Radio Noise, Trans. A.I.E.E., Vol. 59, p. 179, Nov., 1940.

Air Cargo Markets

(*Continued from page* 186)

is believed can only be developed through use of commodity rates.

Over a period of years, every other form of transportation has evolved a system of commodity rates based on the service rendered, what the traffic will bear, and the need for the business. To

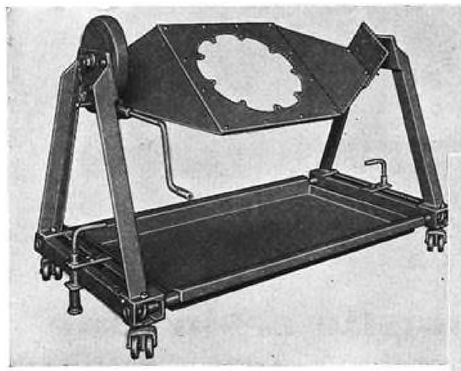

For Speedy Handling of All Production and Servicing Operations on All Types of Engines

● Shown above are two numbers from our complete line of aeroplane engine stands, which includes models for handling all production and servicing operations on all types of engines. The stand at the left is designed for use with interchangeable mounting plates for radial engines. The cylinder stand at the right is designed to handle engine cylinders during manufacturing and servicing operations. Further information on stands for any type of engine will be sent on request.

Staley MANUFACTURING CORPORATION

COLUMBUS, INDIANA, U. S. A.

HELICOPTERS FOR WAR...

use new plastic resin glue

Main rotor blades lift United Aircraft's Army Sikorsky helicopter, and Weldwood Glue shares the stress placed on these rapidly-whirring parts.

The amazing strength of Weldwood Plastic Resin Glue makes shear-proof, vibration-proof welds between woods—in joining or laminating.

It's used and accepted for aircraft by the U. S. Army, Navy and Civil Aeronautics Authority.

Mixed just by adding ordinary tap water to the powder, this moisture-proof, waterproof adhesive is *applied* cold, *sets* cold and sets *fast!*

Jobs can be handled in a few hours after clamping.

Available in 10 lb. and 25 lb. cans and in 100 lb. and 300 lb. drums from your mill supply dealer, industrial distributor or from one of our warehouses conveniently located from coast to coast.

Use the coupon for a free sample and full information on this aviation industry adhesive.

Weldwood

"Makes the glue line the SAFETY line"

WELDWOOD PLASTIC RESIN WATERPROOF GLUE

UNITED STATES PLYWOOD CORPORATION
Weldwood Glue Dept. 81, 55 West 44th Street, New York 18, N. Y.
Please send literature, sample and prices on Weldwood Glue.

*Name*_____

*Company*_____

*Address*_____

*My Regular Source of Supply is*_____

date, the airlines have made rather hesitant attempts with newspapers, magazines, flowers, and a few other items; but before a backlog of experience could be accumulated, the war put such a premium on space that further steps were abandined.

Commodity rates should be established, however, only after careful study to bring in large volumes of business with regular movement. For instance, at full rates the news magazines would have had to put such a high rate on subscriptions that the price would have been prohibitive but, under commodity rates, thousands of copies have been flown regularly by the transport lines.

In another case, foreign dealers of phonograph records have found it difficult to gage their sales requirements—a new movie may suddenly bring a quick demand for a hit tune. If additional supplies of records could be flown in economically—that is, under commodity rates—many other sales can be made. Several dealers report they feel sure that meeting such a demand would increase sales of other records by at least 50 percent if they could get enough of the hit-tune records to keep people coming into their stores. One large record manufacturer estimates his company could fly at least 250,000 lb. of records a year at rates which, it is felt, could also prove profitable to the airlines.

Moving from the strictly luxury to the semi-luxury class—a natural step toward getting in to the every day items which will be needed for the required volume—tomato growers in the Southwest, Mexico, and Cuba have already made inquiries about obtaining a commodity rate which would enable them to sell their product in the winter markets of the East at prices which will develop good volume.

These are but a few examples indicating the starting point; others include inquiries from Canadian hat manufacturers who want to sell in Venezuela and fur traders seeking Brazilian and Argentinian markets.

Perhaps the greatest value which can come from commodity rates is their ability to help balance the directional flow of goods previously discussed. As has been shown, it is only between the United States and Europe that any equality of movement can be anticipated, for between the United States and Latin America the movement has been twice as heavy to the south as it has toward this country. Careful research will be required to locate products which can move by air at lower price levels and, although it is too much to hope that the traffic can be equalized completely, commodity rates will help to fill some of the empty space on return runs.

With the experience in design and engineering gained during the last few years we can expect that new equipment will be more efficient, resulting in lower operating costs which, in turn, will warrant lower rates. A great deal of business can be obtained through lowering the rates where such reductions will enable new commodities to move by air, rather than through trying to increase the movement of goods already being flown. The days when business "came in over the transom" are over; we are approaching a time when the airlines must go out vigorously for new business and hold it through sales and service.

Geometry for Lofting

(*Continued from page* 164)

canted spar. This information is required in order to correctly locate a clearance hole.

Equations of the control cable $Y = 4.2\ X - 26$

$Z = 0.3\ X + 7.5$

Equation of the canted spar: $0.204\ X + Y - 0.080\ X - 80 = 0$

Now by substituting the equations of the cable into the equation of the spar the unknown value "X" may be found.

$$0.204\ X + 1\ (4.2\ X - 26) - 0.080\ (0.3\ X + 7.5) - 80 = 0$$
$$0.204\ X + 4.2\ X - 26 - 0.024\ X - 0.600 - 80 = 0$$
$$4.380\ X = 106.600$$
$$X = 24.338$$

In order to find the "Y" and "Z" values, substitute the "X" value just obtained into the original equations of the control cable.

$$Y = 4.2\ (24.338) - 26 = 102.220 - 26 = 76.220$$
$$Z = 0.3\ (24.338) + 7.5 + 7.301 + 7.5 = 14.801$$

In our last article (Part II, Apr. AVIATION), we demonstrated the manner in which a cover sheet was developed. This cover was for the lower surface of the wing of the P-61 *Black Widow*. In obtaining the flat pattern layout we used coordinates of points obtained by the intersection of canted planes and lines. Now we may show how these points were determined:

As the P-61 was developed, a series of equations for the various structural members were accumulated. Among these were the equations for the rear spar, flap closing channel, canted flap station, and other canted stations. These equations had seen much valuable use long before the cover sheets were required and had been kept on file for future use in tooling data books. These equations were—

Lower ML rear spar

$Y = -0.161625\ X + 108.836$

$Z = 0.01773\ X - 10.594$

Lower ML flap closing channel

$Y = -0.19994\ X + 133.998$

$Z = 0.01555\ X - 9.271$

Canted flap station

$Y = 4.836853\ X - 621.277$

Double canter station

$X - 0.168372\ Y - 0.005543\ Z - 177.008 = 0$

By using these equations together in simultaneous solutions we were then able to establish the coordinates of the necessary corner points.

Procedure: Find the intersection at wing station 139 rear spar intersection.

DARNELL
Casters & Wheels

For light or heavy duty service Darnell Casters and Wheels are made for a long life of trouble-free usage, to protect floors and increase employee efficiency.

Built-in quality assures a long life of efficient service—it pays to "Demand Darnell Dependability".

DARNELL CORP. LTD., 60 WALKER ST., NEW YORK, N.Y.
LONG BEACH, CALIFORNIA, 36 N. CLINTON, CHICAGO, ILL.

Look for the name AIRCRAFT STANDARD PARTS CO. on "Aero-Seal" Hosé Clamps. It appears on the wing of the thumb screw, and the housing is also stamped with the type number and "Aero-Seal". On the band and the wing you will find the part number and AN number.

AIRCRAFT Standard PARTS CO.

Originators of the

"Aero-Seal"

HOSE CLAMP

- HIGH STRENGTH
- UNIFORM PERIPHERAL TIGHTENING
- NO LEAKAGE UNDER HIGH PRESSURES
- SELF-LOCKING, NO LOCK WIRE NEEDED
- NO LOOSE PARTS
- CAN BE RE-USED
- CAN BE PUT ON HOSE IN PLACE
- WILL NOT DISTORT OR COLLAPSE THIN-WALL TUBING
- COMPACT DESIGN
- FULL RANGE OF SIZES
- EXTRA LONG TAKE-UP

Two years ago, at the request of Army Air Force authorities, we undertook the development of a new type hose clamp which would stand up under the strenuous vibration and pressure conditions of modern aircraft service. It took about a year of constant designing, testing, redesigning, and retesting before we finally evolved a model which would satisfy those requirements. Then came further knotty problems of tool design and the establishment of manufacturing methods to obtain volume production and assure maintenance of uniform high quality and dependability. The "Aero-Seal" HOSE CLAMP, as we finally perfected it, met and in many respects exceeded the stringent service demands as expressed in Army-Navy Specification AN-FF-C406a and Drawing AN748. Thus, when you see "Aero-Seal" Hose Clamps with the Aircraft Standard Parts Co. stamp on them, you can recognize them as the perfected product of our original design and development. *Write for our Hose Clamp Circular giving complete data and prices.*

AIRCRAFT Standard PARTS CO.

Aircraft Standard Parts Co.

1715 Nineteenth Avenue, Rockford, Illinois

$X = 139$
$Y = -.161625\ (139) + 108.836 = 86.370$
$Z = .01773\ (139) - 10.594 = -8.130$

By this same method the coordinates for the point on the flap closing channel were found.

Intersection of the double canted station and the lower ML of the rear spar:

$$X - 0.168372\ (-0.161625\ X + 108.836) - 0.005543\ (0.01773\ X - 10.594) - 17.008 = 0$$
$$1.027115\ X = 195.364$$
$$X = 190.206$$

By substituting this value into the equations of the spar ML we can then find the Y and Z values.

$$Y = -0.161625\ (190.206) + 108.836 = 78.094$$
$$Z = 0.01773\ (190.206) - 10.594 = -7.222$$

Once again this method was used at the flap closing channel.

The intersection of the rear spar and the canted flap station was determined by a manner similar to the intersection of two lines in plan view.

$$Y = 4.836853\ X - 621.277$$
$$Y = -.161625\ X + 108.836$$
$$0 = 4.998478\ X - 730.113$$
$$X = 146.067$$
$$Y = -0.161625\ (146.067) + 108.836 = 85.228$$
$$Z = 0.01773\ (146.067) - 10.594 = -8.005$$

By now it should be quite apparent to the reader that the use of analytic geometry in the development of aircraft is a very versatile tool, not only of value to the loftsman but also to the engineer, tool designer, and liason men. It may be used by anyone with a basic knowledge of mathematics.

"Peashooters"

(*Continued from page* 189)

track down difficulties reported by the pilot when, in fact, the pilot had been improperly setting his fuel mixtures or cooling flaps, or merely didn't know when to use the fuel booster pump.

"Excessive engine roughness" is a common pilot complaint, but it just happens that after a couple of hundred hours an engine doesn't run like a newly overhauled job. That certainly doesn't mean it should be pulled off alert status.

In brief, the fighter pilot should *know* his airplane. He should strive to be as good a troubleshooter as he is a pilot. One of the simplest and quickest ways to achieve this end is to be inquisitive. When trouble develops and is corrected by the crew chief, the pilot will profit if he ascertains from the crew chief exactly what the difficulty was—and it's a good idea for the pilot to learn what caused it and how it was corrected. If it should happen again, the pilot would be able to recognize it, refer the precise trouble to the crew chief, and get the airplane back on alert with a minimum of effort. A valuable by-product of this procedure is the building up, between pilot and crew chief, of a personal interest in each other's work. An inevitable improvement in achievement results.

YOUR COPY IS READY FOR MAILING

This new 44 page book gives you the complete story of "SPRING-LIFE" BELLOWS

By engineers—for engineers—yet with information and illustrations so complete that all men engaged in manufacturing can gather a full knowledge of bellows and their functions.

This informative book tells all about "Spring-life" Bellows, including their characteristics, construction and applications, plus data charts and other valuable information to assist engineers in determining bellows requirements.

Also included in this book are illustrations and information pertaining to Cook Pressure Detector Switches, and an introduction to the Cook "MetaLastic" Division. This catalog will be sent to you immediately upon receipt of a request on your letterhead.

Remember, if you have an extremely urgent problem, wire or 'phone us, and we shall be pleased to quickly dispatch a field engineer from one of our district offices to assist you.

ARMY E NAVY

COOK ELECTRIC Company

2700 SOUTHPORT AVENUE • CHICAGO 14, ILLINOIS

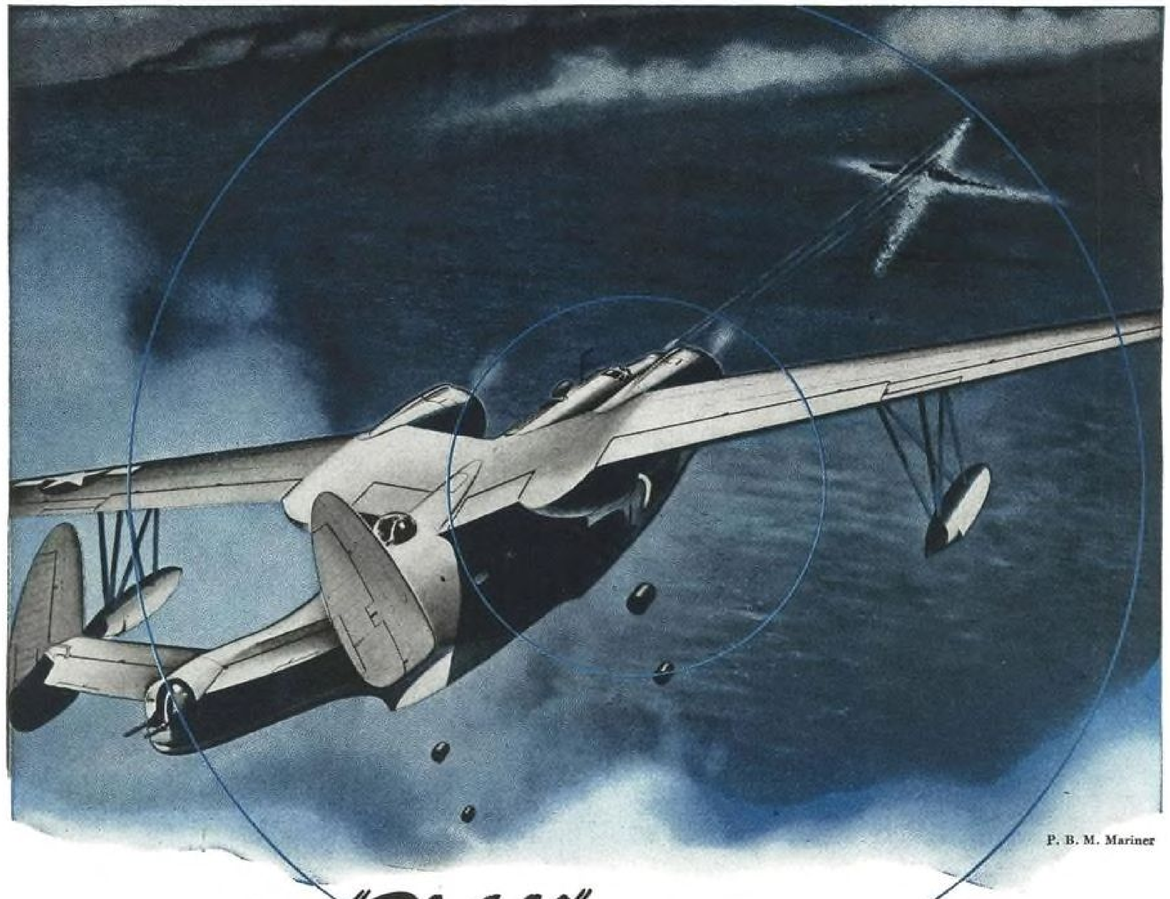

P. B. M. Mariner

TAKING THE "SLAM" OUT OF BOMB BAY DOORS

Bomb bay doors must open quickly and smoothly without jarring . . . *and close without slamming.* Holtzer-Cabot designed a special gear motor to meet these performance requirements which is, today, helping bombardiers blast the enemy.

Many other Holtzer-Cabot special fractional HP motors are providing power for war products so that victory will come sooner.

Our motor development engineers, backed by over 50 years of experience in electric motor design, will discuss your post-war motor problems with you. However, war needs come first and our manufacturing facilities, today, must be strictly limited to building special motors for winning the war as quickly as possible.

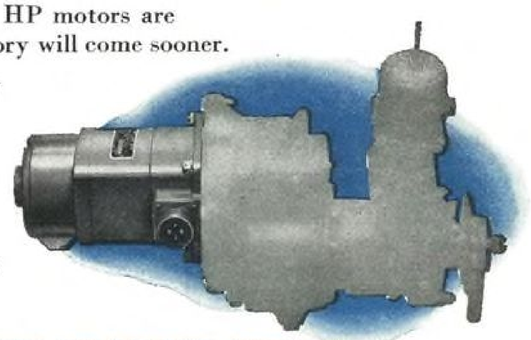

SPECIAL MOTORS DESIGNED TO FIT THE APPLICATION

The HOLTZER-CABOT ELECTRIC COMPANY

Designers and Builders of Special Fractional HP Motors and Electrical Apparatus

125 Amory Street, Boston 19, Mass.; Chicago, Illinois; New York, N. Y.; Philadelphia, Pa.

On countless occasions, Gen. Ennis C. Whitehead of the 5th Air Force has said that it was the close cooperation of each individual that was winning the war—and the close cooperation of the fighter pilot and his crew chief is an excellent example of what he means.

Computing Airspeed

(*Continued from page* 155)

as an approximation when its value is unknown.

Purpose of this article is the presentation of the above-mentioned graphic simplifications. No attempt has been made to discuss sources of error in true airspeed computations due to instrument and pitot-static head position errors affecting both altimeter and airspeed meter readings. In order to compute true airspeed accurately, it is, of course, necessary to measure indicated airspeed and pressure altitude accurately. Derivations of the nomographs and curves presented have been omitted. Thorough-going theoretical treatment of the principles involved have been published in NACA Technical Note No. 616, "The Measurement of Air Speed of Airplanes," by F. L. Thompson, and "Empirical Equations and Nomograph," by Dale S. Davis, McGraw-Hill Book Co., 1943.

Airfoil Pressure

(*Continued from page* 144)

Analyzing the Data

It has become standard practice to express all force data obtained from wind tunnel tests in non-dimensional coefficients of the form —

$$C_F = \frac{F}{qS} \qquad (10)$$

where: F is the force.
q is the free stream dynamic pressure.
S is the area.

In the case of the pressure distribution, the element of force is pds or $(p_L - po)\ ds$, where ds is the element of length under consideration. Regarding the area S, the primary consideration is that of two dimensional flow, but physical reality is retained in the problem by considering a unit span so that S now becomes c (the chord length) times unity.

Referring now to the normal force per unit span F_y', and recalling that —

$$F_y' = pdx$$

$$\text{then } C_n = \frac{Fy'}{qc} \int \frac{p}{q} \frac{dx}{c} = \frac{1}{c} \int \frac{p}{q}\, dx \qquad (11)$$

where dx is the chordwise distance from the leading edge, and C_n is the normal force coefficient.

Similarly the chord force is given by —

$$C_c = \frac{1}{c} \int \frac{p}{q}\, dy \qquad (12)$$

where dy is the vertical distance from the chord line.

Moments are also reduced to non-dimensional coefficients of the form —

$$C_m = \frac{qS_c}{M} \qquad (13)$$

WORTHY OF AMERICA'S FIGHTING SHIPS

FIREPROOF NAUGAHYDE

In the Ready Room on an Aircraft Carrier, in most rooms on our Navy's ships where furniture is used you find fireproofed upholstery. The Navy Bureau of Ships' specification for fireproofed seat upholstery is fulfilled by the quality of our Fireproof Naugahyde.

Years before Pearl Harbor our Research and Development Departments had already evaluated the plastics and synthetic resins which could be used to improve rubber coated fabrics. Because of this preliminary work we were able to almost immediately convert from rubber to plastic Naugahyde for upholstery in tanks, trucks, buses, airplanes, ships and other mobile equipment.

Today new types of coatings developed during the war are being applied to all kinds of fabrics—cotton, rayon, nylon, fiber glass—to provide the many specialized coverings for the war in general.

These war developments and more now being perfected in our laboratory are important to you, as a user of Naugahyde. Out of war, will come a better Naugahyde, better made than ever, to serve you in meeting the needs of an America at peace.

U. S. NAUGAHYDE*

*Reg. U. S. Pat. Off. **UPHOLSTERY**

Serving Through Science

United States Rubber Company

1230 Sixth Avenue • Rockefeller Center • New York 20, N. Y.

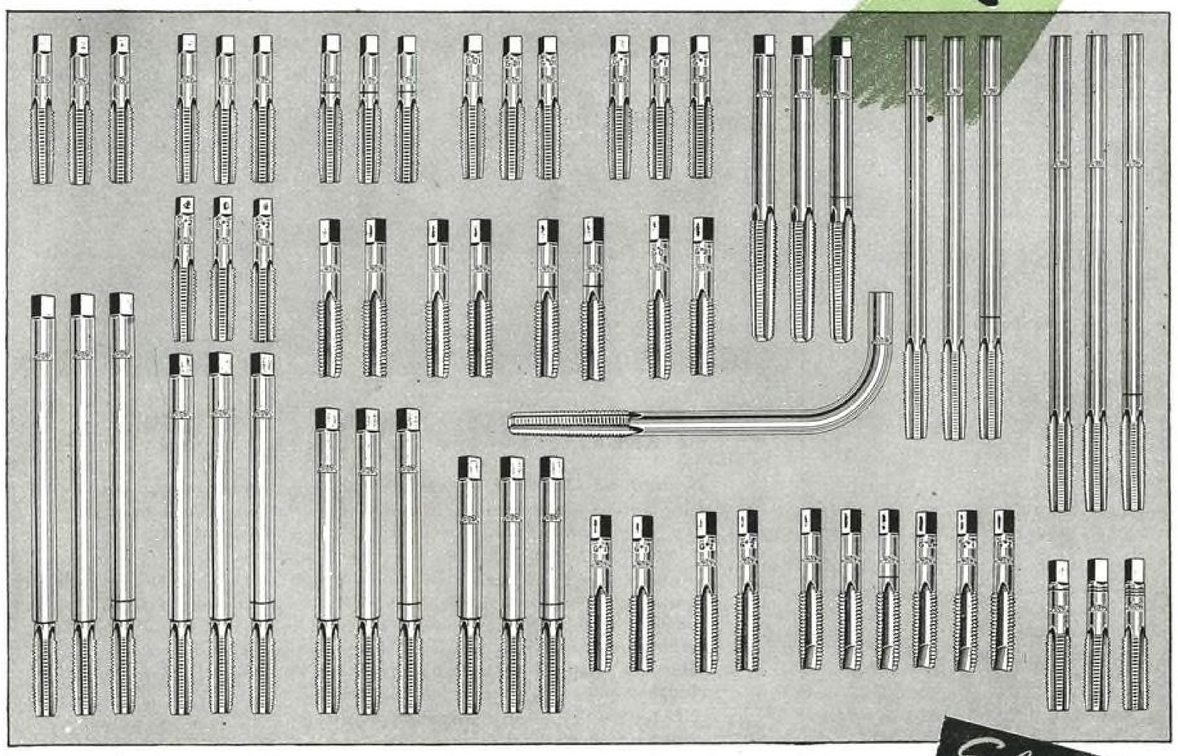

IT'S TRUE. Shown above are the 61 different kinds of ½"—13 N. C. Taps which "Greenfield" lists in its catalog, not including special "Maxi" finish taps. Many look identical, but each has its own particular qualities and usefulness. . . . Which one will do the best job for you? That is a "$64 question" that Greenfield helps you answer in its new booklet "Selecting the Right Tap for the Job." If you need more help, you can call on Greenfield's staff of expert screw thread engineers for recommendations, or ask a Greenfield field service engineer to call.

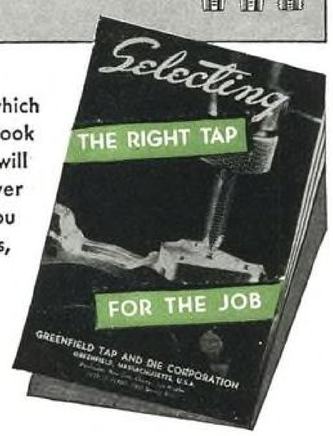

GTD GREENFIELD
AGES APS IES

GREENFIELD TAP & DIE CORP.
GREENFIELD MASSACHUSETTS
ARMY NAVY

where M is the moment. Consistent with the convention of taking airfoil moments about the quarter-chord point, the expression for the quarter-chord moment coefficient becomes—

$$C_{m_{c/4}} = \frac{1}{C^2}\left[\int \frac{p}{q}\left(\frac{C}{4} - x\right)dx + \int \frac{p}{q}\, y\, dy\right] \tag{14}$$

In obtaining the net static pressure, it becomes necessary to refer all orifice readings to some reference level. Choice of this level, and the ensuing derivation of convenient coefficients with which to present the data, has been the source of some confusion. Various writers have introduced different nomenclature with which to present the data, however the implications of each are identical.

If the free stream static pressure is taken as the reference level, then the net static pressure is merely—

$$p = p_L - p_o \tag{15}$$

where: p_L is the local static pressure.
p_o is the free stream static pressure.

The definition of the pressure coefficient P, is—

$$P = \frac{p}{q} = \frac{P_L - P_o}{q} \tag{16}$$

Some writers refer to the pressure coefficient as $\Delta p/q$ and others as C_p. Choice of the form is arbitrary, the important point being that value represented by each form is identical with the others.

In some instances,[4] the orifice readings are referred to free stream total head, for which case—

$$\delta p = H - P_L \tag{17}$$

or $$P_L = H - \delta p \tag{18}$$

The value of H for the undisturbed stream is—

$$H = P_o + \delta \tag{19}$$

Substituting this in the expression for p, and solving—

$$P_L - p_o = q - \delta p \tag{20}$$

The pressure coefficient P is again defined by—

$$P = \frac{P_L - P_o}{q_o} = 1 - \frac{\delta p}{q_o} \tag{21}$$

In some instances, the data are presented in terms of the square of the velocity ratio— $\left(\frac{V_1}{V_o}\right)^2$ which is called S. The relation between P and S is easily established by equating Bernoulli's Equation at some point on the airfoil to some point in the free stream, viz—

$$P_o + q_o = p_L + q_L \tag{22}$$

from which

$$P_L - p_o = q_o - q_L \tag{23}$$

Dividing by q_o,

$$(P_L - P_o)/q_o = 1 - \frac{q_L}{q_o} = 1 - \frac{P_L}{p_o}\left(\frac{V_L}{V_o}\right)_2 = P \tag{24}$$

For incompressible flow (which exists in the majority of testing), the density is constant throughout the flow and cancels

[4] cf. T.R. 563.

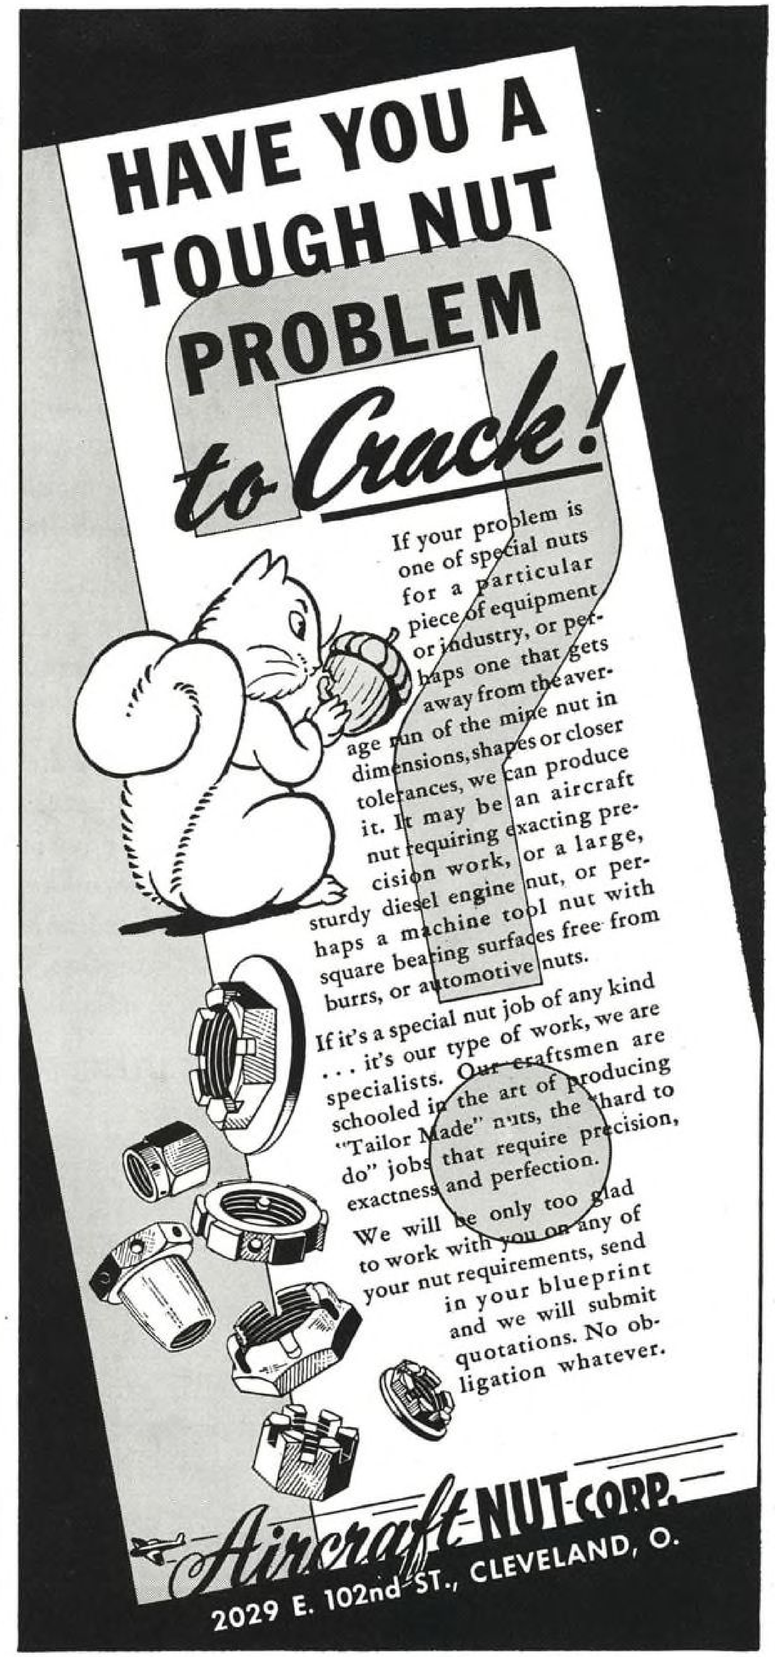

Bridgehead
UNDER FRIENDLY SKIES

Control of the skies means successful landing—an established bridgehead.

A definite contributor to any sky cover, any bombing sortie, is the motor that retracts the landing gear of a plane after the take-off—lowers it again on return.

Thousands of Leland DC motors of the aircraft type daily serve in this capacity—daily contribute to the morning headlines—unfailingly hasten the Victory.

Leland aircraft designs now in the service, and others yet to be developed, will also serve peacetime aviation. Engineering of some models already in progress. Engineering service available on call.

THE LELAND ELECTRIC CO., DAYTON, OHIO

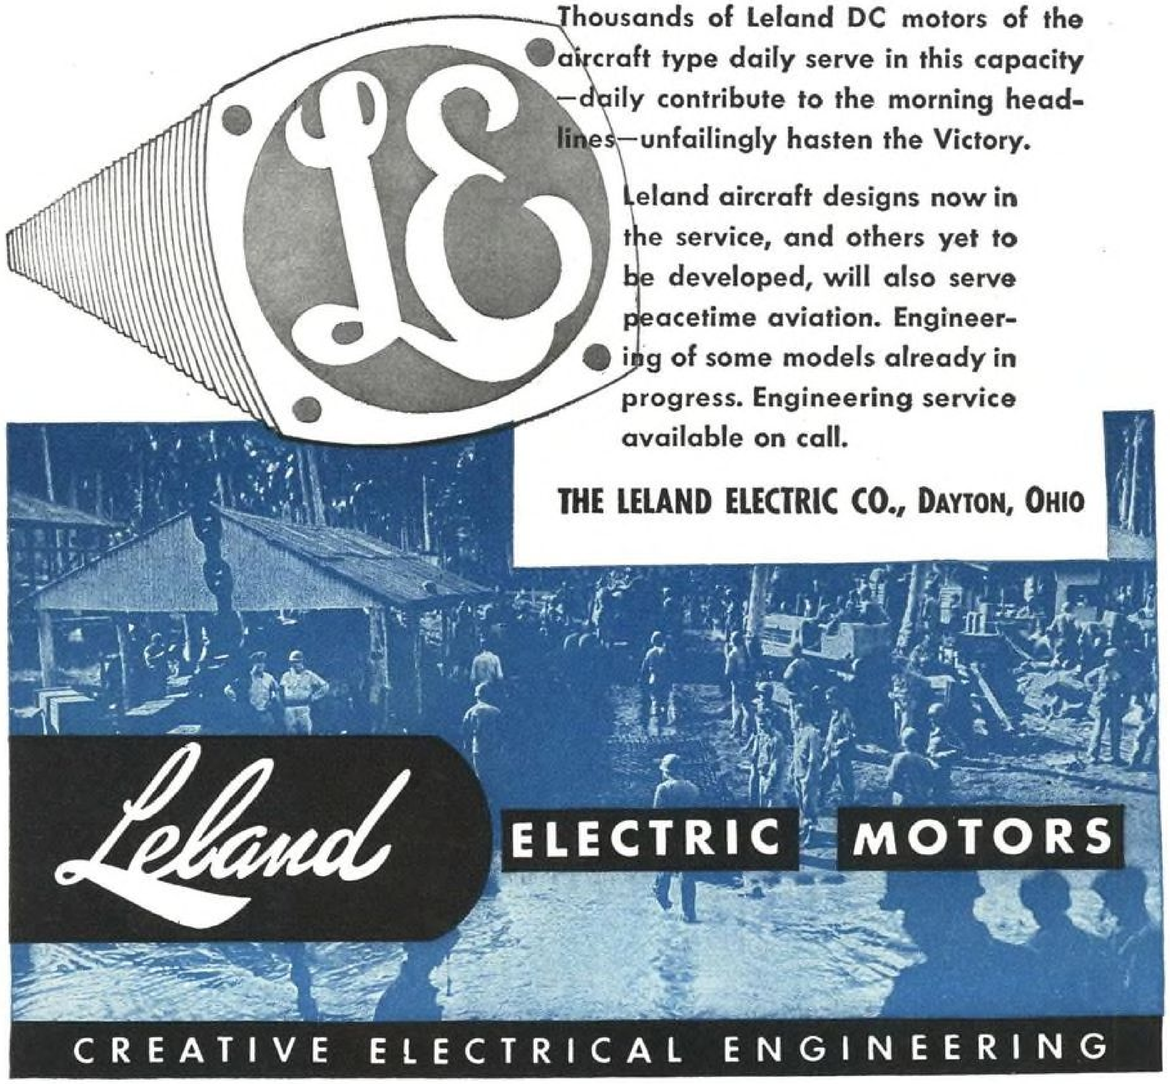

out of the above expression to give—

$$P = 1 - \left(\frac{V_L}{V_0}\right)^2 = 1 - S \qquad (25)$$

All publications of the NACA present pressure distribution data as plots whose coordinates are either P, S, or p/q against percent chord. Where auxiliary surfaces, such as flaps or ailerons, are tested, the loading on these surfaces may be given parallel and perpendicular to their chord lines or parallel and perpendicular to the chord line of the wing proper. In actual practice, the data are taken by visual observation or by simultaneous recording of all manometer tubes. The latter is accomplished by photographing the manometer board or by placing a sheet of photostat paper behind the manometer tubes and exposing the arrangement to a strong light.

A typical record taken by the photostat method is shown in Fig. 8. The total head tubes (labeled Z) are used as a reference level, and all measurements are referred to them. Distance in inches from the reference level to the meniscus of the pressure tubes is divided by the dynamic pressure (in corresponding inches of the same manometer liquid). This is equal to $\delta p/q$ and $1 - \delta p/q = P$, the pressure coefficient. P is then plotted against x/c for normal force coefficients or y/c for chord force coefficients, where x and y are the coordinates of the orifice locations measured from the leading edge and chord line respectively.

Review of Patents

(*Continued from page* 192)

scribes arrangement in which these features result from a cable connection between movable element of accumulator and lift system. Invention associates auxiliary lifting jack with main lifting jack. Former communicates with accumulator, as main jack, but is kinematically connected to retractable undercarriage to introduce, at every instant, desirable pressure compensation in hydro-pneumatic circuit.—2,336,794, filed Feb. 10, 1941, patented Dec. 14, 1943, R. L. Levy, assignor to Societe d'Inventions Aeronautiques et Mecaniques S.I.AM., Fribourg, Switzerland.

New Throttle Control Device is designed to govern engine to achieve constant power output by causing throttle to be responsive, in its position, to liquid fuel flow of engine. Engine power is controlled by maintaining as a constant the amount of liquid fuel fed to engine carburetor, or to any other fuel-air proportioning device which may be used. Device is stated to be particularly applicable to aircraft engines.—2,336,800, filed July 15, 1941, patented Dec. 14, 1943, E. F. Pierce, assignor to Wright Aeronautical Corp.

For Mechanisms of retractable landing gears, new patent particularly concerns valve adapted for use in shock absorbing struts of such gears. Provided is vent-closing valve with automatic means for closing vent when gear is completely retracted. Vent is open at all times except when strut is fully collapsed. Means of closing vent is arranged to operate along with retracting and extending mechanism of gear.—2,336,823, filed Jan. 31, 1941, patented Dec. 14, 1943, F. A. Wedberg and F. Lakowitz, assignors to Curtiss-Wright Corp.

Engine-Propeller Control has been devised for operation where a supercharged engine drives a governor-controlled variable-pitch propeller. Arrangement is designed for simultaneous regulation of engine horsepower and propeller pitch,

1932

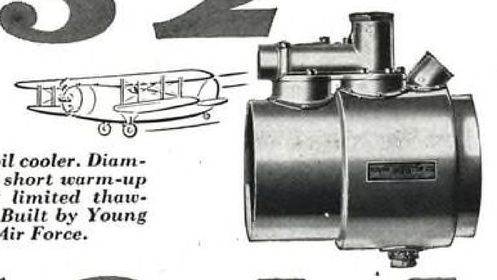

A pioneer aircraft oil cooler. Diameter 5 inches, with short warm-up "muff" indicating limited thaw-out requirements. Built by Young for the U.S. Army Air Force.

1944

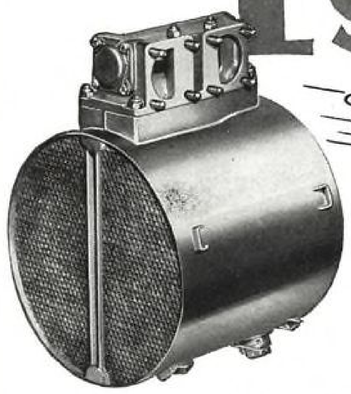

Present Young aircraft oil cooler. 10 inches in diameter, almost four times the heat transfer capacity and five times faster warm-up. Built by Young for military and commercial use.

YOUNG COOLERS
KEEP PACE WITH PROGRESS

DURING the past twelve years planes have harnessed almost ten times the horsepower — flown four times faster — miles higher — many times farther. Pacing this unprecedented path of progress were vital accessories such as the Young Aircraft Oil Coolers, shown above. While the 1932 model was made by the hundreds — its modern counterpart is being made by the thousands. Though alike in basic principle, the present cooler is usually twice as large and has four times the heat transfer capacity. It has rapid warm-up qualities and excellent anti-congealing characteristics. The modern Young Aircraft Cooler is the last word in efficiency . . . is built to rigid military specifications. Let Young Heat Transfer Engineers help you keep pace with progress.

YOUNG

BUY BONDS • PRODUCE MORE • SALVAGE SCRAP • WIN THE WAR

HEAT TRANSFER ENGINEERS

Manufacturers of Oil Coolers • Gas, Gasoline, Diesel Engine Cooling Radiators • Intercoolers • Heat Exchangers • Engine Jacket Water Coolers • Unit Heaters • Convectors • Condensers • Evaporators • Air Conditioning Units • Heating Coils • Cooling Coils • and a Line of Aircraft Heat Transfer Equipment.

YOUNG RADIATOR CO., Dept. 294-E, RACINE, WIS. U.S.A.

Distributors: Pacific Airmotive, Burbank, Calif. · Aircraft Steel & Supply Co., Wichita, Kans.

3-M ADHESIVE

3-M ADHESIVES

... for export packaging

You'll want this book★ if you PACKAGE for Export

It contains complete illustrated instructions for sealing cases of goods for export shipment, covering such points as:

1. How to make prepared liners for fibre or wooden cases.
2. How to make built-in liners for wooden cases.
3. How to seal fibreboard cases.
4. How to seal wooden cases.
5. How to seal small packages.

Also information on the selection of a suitable adhesive.

3-M Adhesives, for sealing fibre shipping containers and water-resistant case liners, withstand rough handling, moisture and extremes of temperature.

SOUND DEADENING COATING CONTAINERS

SEALING GAS TANKS ADHERING

MINNESOTA MINING AND MANUFACTURING CO.

GENERAL OFFICES: SAINT PAUL 6, MINN.
BRANCHES IN PRINCIPAL CITIES
ADHESIVE DIVISION: DETROIT 2, MICH.

Manufacturers of "SCOTCH" Brand Tapes... 3-M Abrasives... 3-M Floor Waxes and Sealer... 3-M Adhesives... Scotchlite Reflective Material ... 3-M Cutting and Finishing Compounds... 3-M Lapping and Grinding Compounds... Colorquartz Roofing Granules... Spherekote Tympan Cover.

Minnesota Mining & Manufacturing Company
900 Fauquier Avenue, Saint Paul 6, Minnesota

A-544A

Yes, I'd like a copy of your new book on sealing for export. ★

Name_____

Address_____

City_____ Zone_____ State_____

especially for particular airplane maneuvers such as takeoff, climb, and cruising. Means is also provided for simultaneously regulating engine intake manifold pressure and propeller-pitch controlling governor in order that a desired engine performance for a particular maneuver may be repeated each time specific maneuver is made.—2,336,844, filed Dec. 29, 1939, patented Dec. 14, 1943, R. S. Buck, Assignor to United Aircraft Corp.

Aircraft Fire Extinguishing System. Here, primary object is to reduce complication and labor required for installing fire extinguishing systems in aircraft, also to minimize weight of system when installed. Arrangement calls for delivery of fire-fighting gas to engine compartments through a system of discharge piping, of requisite diameter, running in shortest possible course from source to each compartment, that is, as directly as internal wing structure of craft will permit.—2,336,942, filed Sept. 16, 1942, patented Dec. 14, 1943, C. H. Lindsay, assignor to American-La France-Foamite Corp.

Aviation Mask. This is an oronasal high-altitude breathing mask having breathing chamber adapted to enclose mouth and nose of wearer with inclusion of microphone. Latter is located immediately in front of mouth of wearer. This mask's breathing valves are symmetrically positioned in a transverse line on either side of microphone casing, transverse valves being placed for easy balanced breathing. A porous material, such as sponge rubber, is employed in connection with double valve openings.—2,336,979, filed Apr. 19, 1941, patented Dec. 14, 1943, W. M. Boothby and A. H. Bulbulian.

Parachute Pack Invention concerns development of pack and container in which suspension lines of a parachute are prevented from being thrown over or about canopy, thus fouling it. To achieve this result, there are incorporated means for retaining skirt of canopy in place adjacent to base of pack and over suspension lines until upper portion of canopy has been drawn out to nearly its full length. Thereafter, skirt of canopy is released, and suspension lines are only drawn from retainers when canopy is so extended that these lines cannot throw over to foul canopy.—2,337,169, filed Oct. 9, 1941, patented Dec. 21, 1943, F. Smith, assignor to Pioneer Parachute Co.

Stabilizing Means for Rotary Craft. This is development to attain substantial equality of torque of rotors (in craft having a pair or more of rotors) at least under normal flight conditions. Specified is balance gear of differential type for use in conjunction with system for controlling pitch of rotors. Means are provided permitting rotors to continue turning in event of engine or transmission failure so that sufficient lift is maintained to allow craft to be landed safely. This is accomplished through arrangement for disconnecting engine from both rotor transmissions.—2,337,570, filed Apr. 24, 1940, patented Dec. 28, 1943, C. G. Pullin, assignor to Autogiro Co. of America (G. & A. Aviation Corp.).

Automatic Pilot Development concerns use of detachable card for gyro turn units of such mechanisms. Particularly specified are improvements in construction and assembly of upper card of turn units. Here, detachable card is so constructed, with respect to assembly, that it may be readily installed after remaining assembly has been completed, thus obviating possibility of damage or destruction of card, which is stated to be a common risk in conventional practice of securing card to parts prior to assembly.—2,337,602, filed Oct. 21, 1942, patented Dec. 28, 1943, R. M. Heintz, assignor to Jack & Heintz.

Intercooling Problems

(*Continued from page* 192)

be about 300 deg. F. under standard atmospheric conditions. Even if detonation did not prohibit such temperatures, the loss in thermal efficiency of the engine and the loss in efficiency of the engine-stage supercharger would do so. In such a case, the only alternative to some form of charge-air cooling is severely reduced power output.

On the other hand, consider a transport designed to cruise at 25,000 ft. and employing both auxiliary- and engine-stage supercharging to attain this critical altitude. If a pressure out of the auxiliary-stage supercharger of as 23 inches of mercury is required for, say, the power to be used in climbing to 25,000 ft., the resulting carburetor temperature will be about 140 deg. F. compared with an outside air temperature of —30 deg. F. Now this temperature might easily be below the detonation limit at the climb power, so that intercooling could be omitted without reduction of manifold pressure. If intercooling were used, an initial temperature difference between engine and cooling air of 170 deg. F. is available, so an engine air temperature drop of 70 deg. could readily be obtained (40 percent intercooler "effectiveness"). This would produce a gross gain in engine power of the order of 7 percent. Even though the net gain would be somewhat less because of the weight and drag of the intercooler, the improvement in rate-of-climb at this altitude would be substantial.

Consider, however, the cruising condition. A carburetor pressure of 18 inches of mercury would probably produce the cruising power desired. Without intercooling the carburetor air temperature would be only 80 deg. F. compared with a detonation temperature of perhaps 150 deg. F. Intercooling could reduce the 80 deg. temperature to 40 deg. F. or less, but this temperature reduction is certainly unnecessary, and would be of no advantage to the transport unless it resulted in reduced specific fuel consumption since the additional power is not needed.

With the fuels of reduced volatility now available, difficulty with poor vaporization is likely to be encountered at low mixture temperatures. The trouble takes the form of condensation of the fuel in the manifold and on spark plugs, cylinder walls, etc., resulting in excessive leanness, low effective anti-knock, and fouling of the plugs. There is, accordingly, a trend toward the use of higher carburetor air temperatures. Under these conditions it is doubtful whether lower fuel consumptions would result from lower carburetor air temperatures attainable with intercooling even if such temperatures were usable in cruising. When the drag and weight of the intercooler installation is considered, it is apparent that such an installation may well be detrimental at cruising power.

Such being the case, the question arises as to whether it is worth-while in transport operation to risk reduced efficiency in many hours of cruising in order to have available more rate-of-climb at altitude.

It will be well to defer a specific answer to the question of when to employ charge-air cooling with the conclusion merely that high carburetor air temperatures in some flight conditions do not necessarily mean that charge-air cooling is desirable.

How Much Charge-Air Cooling?

Next, let us take up a problem closely related to that just considered: if charge-

WETORDRY Safety Walk

Applied with WETORDRY Safety Walk Adhesive 613

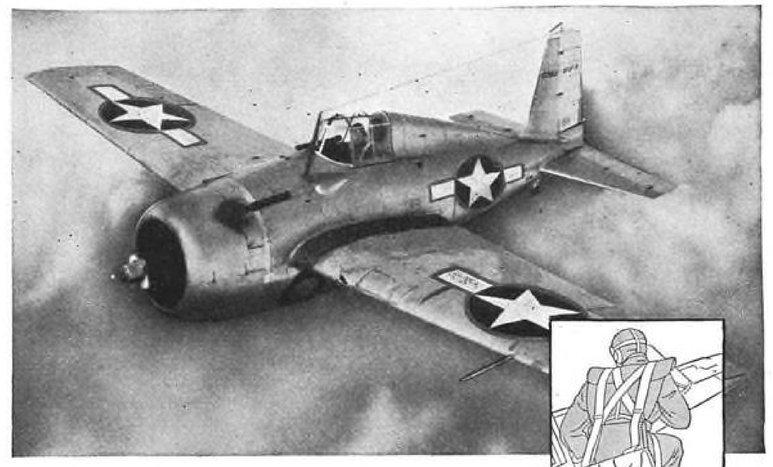

No slipping on this *Non-Skid Wing Walk!*

● A flyer incapacitated by a fall from a slippery wing is out of service as thoroughly as if he had been hit by enemy flak. A WETORDRY Safety Walk on the wing will get the pilot into the cockpit ready for action—at top speed.

Once WETORDRY Safety Walk is properly applied with WETORDRY Safety Walk Adhesive 613 it is there to stay. It will always provide sure footing. Even under the most extreme conditions every step is a safe, sure step. Use the coupon below to obtain valuable illustrated data and application instructions covering WETORDRY Safety Walk.


WING WALKS

LADDER TREADS

PLATFORMS

WALKWAYS

MINNESOTA MINING AND MANUFACTURING COMPANY

GENERAL OFFICES: SAINT PAUL 6, MINNESOTA
BRANCHES IN PRINCIPAL CITIES

Minnesota Mining & Manufacturing Company
900 Fauquier Avenue, Saint Paul 6, Minnesota

A-544SW

Yes, you may send me a copy of your book on WETORDRY Safety Walk.

Name_____

Address_____

City_____ Zone_____ State_____

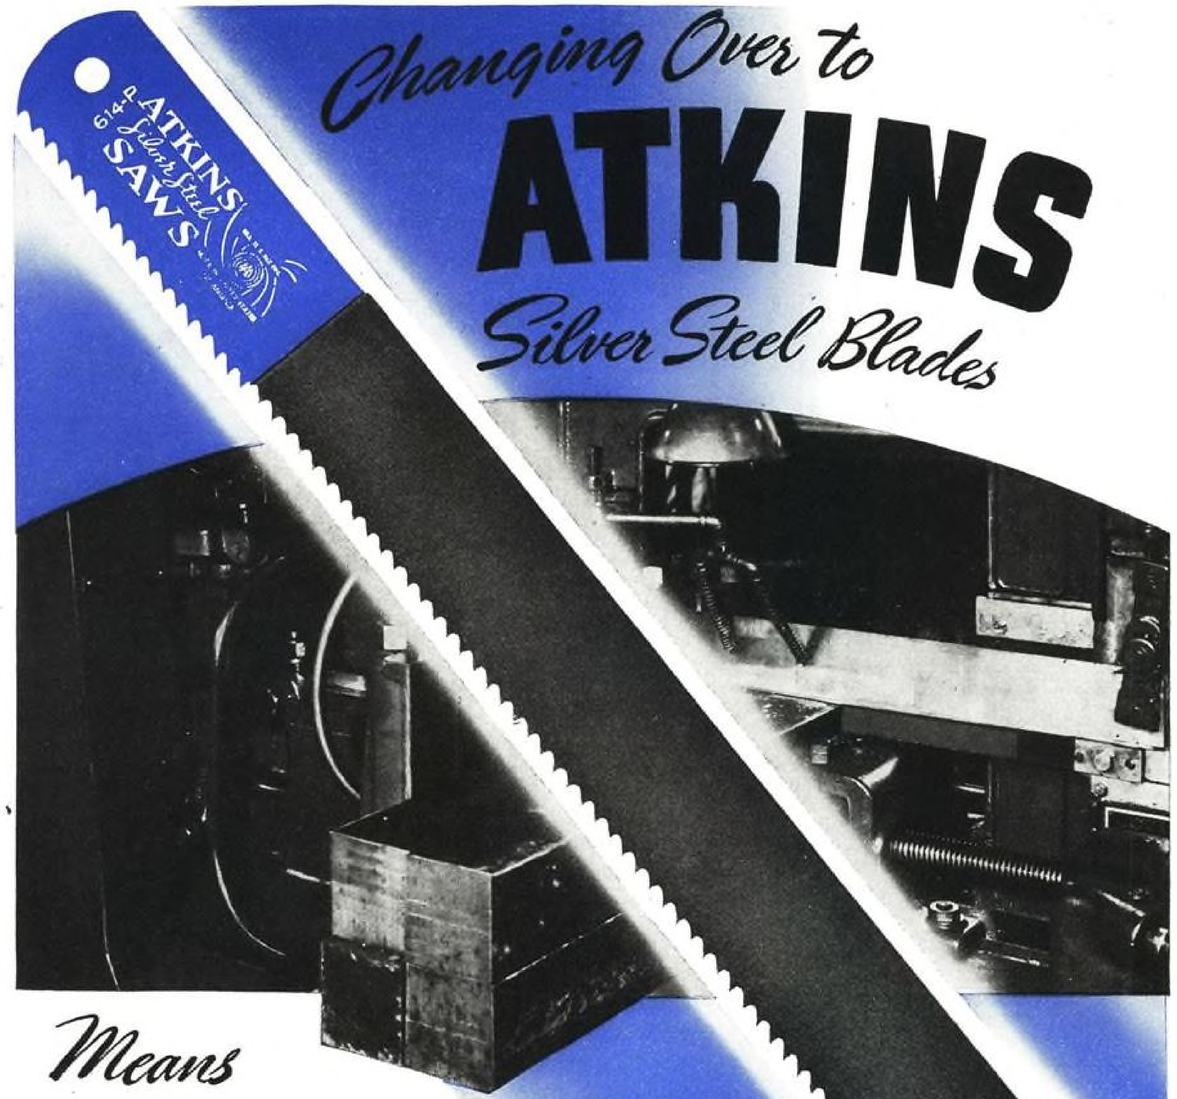

Changing Over to

ATKINS

Silver Steel Blades

Means

FEWER CHANGE-OVERS
ON MACHINES

● Tool change-overs are one of those "necessary wastes". Expensive machines stand idle, valuable workers mark time, production stops while a worn tool is replaced. The responsibility for holding such "necessary wastes" at rock-bottom is one of the toughest jobs plant men face. For thousands, this problem has resolved itself into using Atkins *Silver Steel* Blades for all metal cutting. These famous blades with the "Blue Ends" have the remarkable endurance of *Silver Steel*—the ability to cut fast over long periods. These are points that Atkins Engineered Cutting Service is prepared to demonstrate in your plant on work of your choosing. Write today for information.

E. C. ATKINS AND COMPANY, 444 S. Illinois St., Indianapolis 9, Ind.

All Atkins Silver Steel Blades have the "Blue Ends", symbol for superior performance since Atkins pioneered high speed steels for metal cutting almost two decades ago.

TOOLS ARE WEAPONS . . . TREAT 'EM RIGHT!

air cooling is to be employed, how much cooling should be attempted? The answer lies between two limits. The minimum amount of cooling is that which will provide a carburetor air temperature just low enough to avoid detonation under the most critical condition. The maximum possible amount of cooling is really no limit, since it requires infinite intercooler size; it provides a carburetor air temperature equal to the atmospheric temperature increased by dynamic heating.

In arriving at the minimum intercooler size, it is found that the limit is not absolute; it depends upon the selection of the *most critical condition.* In the case of fighter airplanes, there is little question that the power used should be the maximum permissible from the engine, and the altitude should be the maximum obtainable with the supercharger. Whether the atmospheric temperature used should correspond to the hottest day likely to be encountered or to an average day is debatable, but with military airplanes the decision is out of the hands of the airframe designer since it is specified by the procuring agency. With commercial airplanes there is not only the question of atmospheric conditions, but also the question of what power and altitude to use. As we saw earlier, it probably will not be desirable to cool maximum power, but only a typical power condition.

Now, the determination of the optimum intercooler size for a particular condition is a straightforward problem which proceeds along well-established lines, under assumptions which will be discussed later. The important point is that the optimums intercooler is purely of academic interest; the size of intercooler which results in the optimum airplane is generally the smallest size which will squeeze by the most critical necessary design condition. This results from the fact that for any particular design condition, the optimum intercooler is somewhat larger than the one that will just meet that condition. The minimum intercooler for the most critical condition is however, generally larger than the optimum for the *typical* operating condition. If the optimum cooler were selected for the most critical condition, a double penalty would accrue in the typical operating condition. The minimum cooler for the most critical condition is already larger than the optimum for the typical condition, and the optimum for the most critical condition is larger still. Therefore, the only usefulness in calculations of the optimum intercooler is to make sure that the optimum cooler for the typical condition is not larger than the minimum required for the most severe condition which must be met.

For example, in the case of fighter, the typical condition may well be taken as the maximum power at the critical altitude under standard atmospheric conditions, and the most severe condition as the same power and altitude with maximum summer temperatures. Of course, the carrying of the larger cooler which will result from these conditions for the long distance now required of fighters will exact a severe penalty in weight, but this must be accepted since the pri-

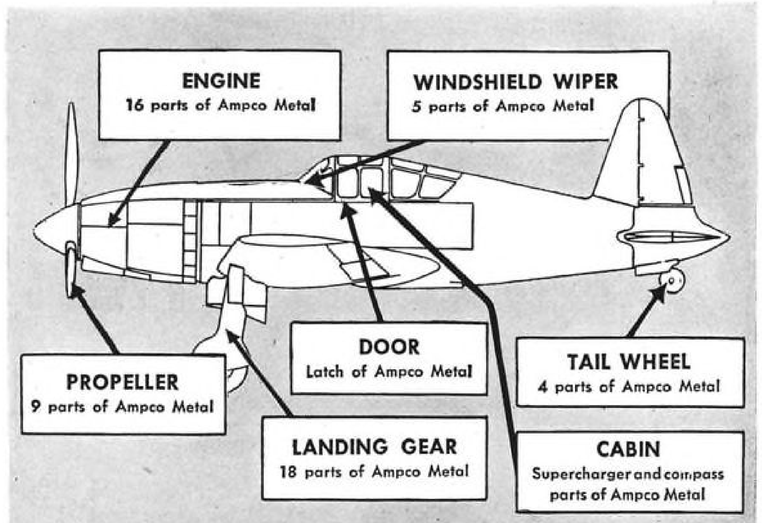

Where durability means safety
...you find parts of wear-resisting Ampco Metal

Through the test of war, Ampco Metal has become . . . more than ever . . . the standard of the aircraft industry — to meet severe conditions of wear, shock, and corrosion . . . and to provide special, closely controlled combinations of physical properties for specific needs.

The Ampco aircraft bulletin lists and illustrates many applications of this superior alloy of the aluminum bronze class, which lasts several times as long as ordinary bronze (see composite parts summary above). Applications are increasing constantly — including many recent ones not yet released for publication.

Your nearest Ampco field engineer can give you the benefit of this intimate experience. Call him, or write for your copy of the Ampco aircraft bulletin.

AA-1

Airplane propeller attaching nut
—typical of the critical parts where Ampco Metal carries the responsibility for safety.

AMPCO Reg. U.S. Pat. Off.
Metal
The Metal without an Equal

Ampco Metallurgical Specialties

Ampco Grades 12 to 22 (special alloys of the aluminum bronze class) . . . Ampcoloy (general industrial bronzes) . . . Special Custom Copper-base Alloys.

• • •

Sand Castings . . . Centrifugal Castings . . . Extruded and other Wrought Products . . . Precision-Machined Parts . . . Ampco-Trode (coated aluminum bronze welding electrodes) . . . Ampco Non-Sparking Safety Tools.

Tear out and mail coupon

AMPCO METAL, INC.
Dept. A-5, Milwaukee 4, Wis.
Please send "Ampco Metal in Aircraft" and File 41 of Engineering Data Sheets.
Name.....Position.....
Company.....
Address.....
City.....(.....) State.....

SR-4 STRAIN GAGES

Answer "Will it take it?" Questions for You . . .

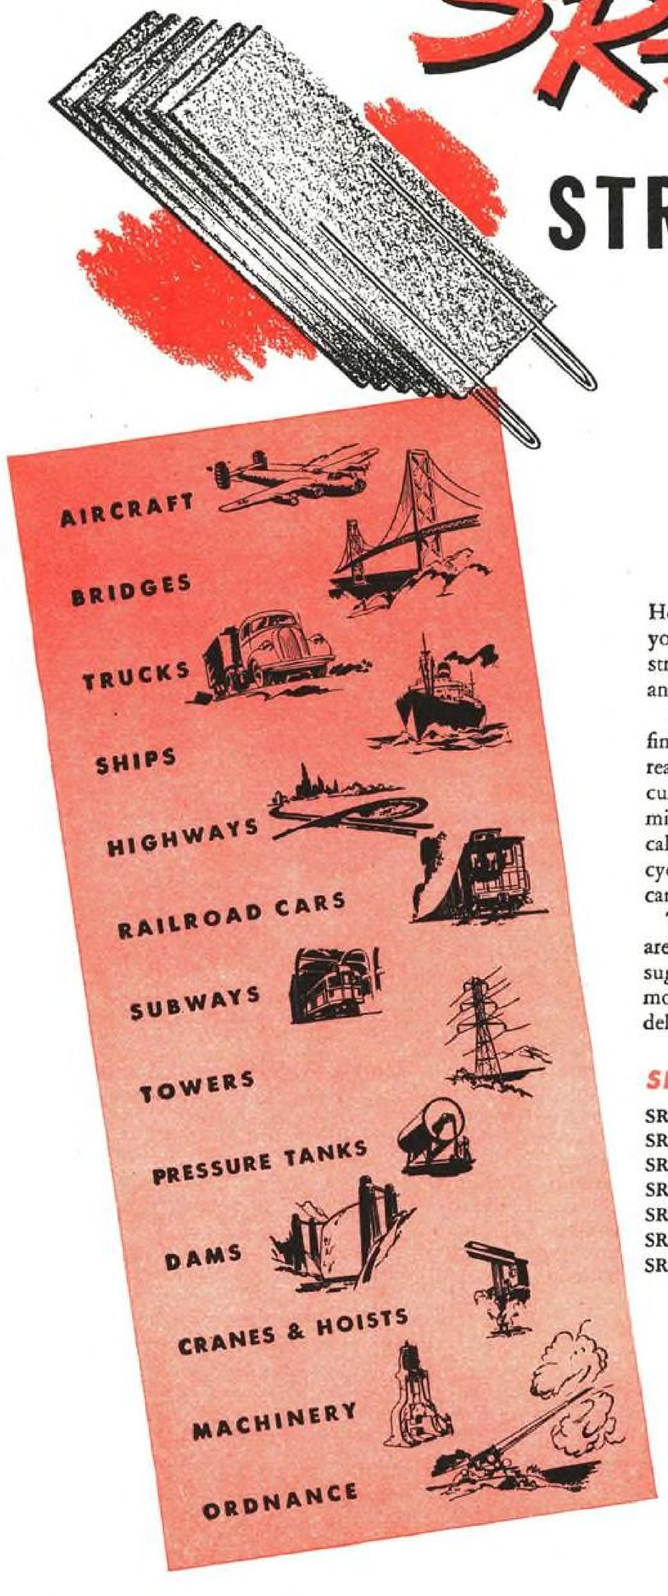

Here is the most simple, accurate and convenient device you can imagine for checking static or dynamic *design* stresses against *service* stresses in complex structures and machines.

Some types of SR-4 gages are as small as your little fingernail. They can be installed any place you can reach to cement them down on plane or moderately curved surfaces. They measure strains to one part in two million, statically, and to nearly as small a value dynamically. They respond without loss of linearity from zero cycles per sec to more than 30,000. Cost is low, so units can be installed in quantity in large structures.

The list shows some of the many fields where engineers are using SR-4 Strain Gages. Your own ingenuity will suggest where they can serve you. The Baldwin Locomotive Works, Baldwin Southwark Division, Philadelphia, Penna., U. S. A.

SEND FOR BULLETINS

SR-4—Strain Recorder . . . Bulletin 170
SR-4—Portable Strain Indicator . . . Bulletin 169
SR-4—Scanning Recording Equipment . . . Bulletin 172
SR-4—Torquemeter . . . Bulletin 165
SR-4—Applications . . . Bulletin 171
SR-4—Applications to Shipyard Problems . . . Bulletin 174
SR-4—Bonded Resistance Wire Strain Gage . . . Bulletin 175

THE BALDWIN GROUP

BALDWIN
SOUTHWARK
TESTING EQUIPMENT

mary function of the high-altitude fighter is operation at maximum power at high altitude. In a particular case it might be found that an optimum cooler for standard-day operation would weigh 30 pounds, whereas the minimum for a very hot day would weigh 50 pounds. Whether even this increase is justifiable depends upon how much operation will be necessary in hot weather. Certainly it would be difficult to justify the optimum cooler for a hot day which might weigh 60 pounds. The loss in performance on a hot day with inadequate cooling is so severe (Reference 1) that the use of the 50-lb. cooler is probably justified unless it involves unusual penalties in the airplane arrangement. Since the vast majority of operation will be at temperatures near standard and sometimes colder, it is bad enough to have to use the 50-lb. cooler; a 60-lb. cooler, with all the penalties that would involve under normal conditions, in weight, drag, and arrangement, could not be tolerated.

Determination of Optimum Intercooler Size

The methods used in the determination of the optimum intercooler size for the typical operating conditions are obvious and well-known, involving the balance of the power gain from reduced charge-air temperatures against the power loss, which consists of weight, and internal and external drag terms. Some discussion of the assumptions involved may be pertinent, since the answer is extremely sensitive to these assumptions.

Within the limits set by detonation and the vaporization difficulties mentioned, the charge-air temperature should be at the disposal of the intercooler designer, and considered as one of the primary variables instead of being limited to some arbitrary figure such as 90 deg. F. at the carburetor. Usually the optimum cooler will result in a temperature above that figure rather than below.

Weight: Another important assumption is the weight chargeable to the intercooler. The light weight of air-to-air intercoolers is deceptive, and it cannot be repeated too often that the weight chargeable to the addition of a particular item is not the weight of the bare item alone. Thus, we must add to the weight of the intercooler core the weight of the additional engine air ducts, the weight of the entrance and exit cooling air ducts, including their flexible seals, the weight of the flap which controls the cooling air exit area, the push-rod that operates the flap, the electric motor or hydraulic strut, the controls to the pilot's compartment, the flexible mount for the core, and perhaps instrumentation and regulating equipment. Some of these parts are subjected to high differential pressures, and all to vibration and temperature extremes. The exit flap, for example, often encounter limit design air loads of the order of 1,000 pounds per square foot at the design dive speed. Furthermore, if other units have to be rearranged to accommodate the installation, increases in weight of these units may be appreciable, and are chargeable to the intercooler. This may be especially important if heavy struc-

SMALL POTATOES . .

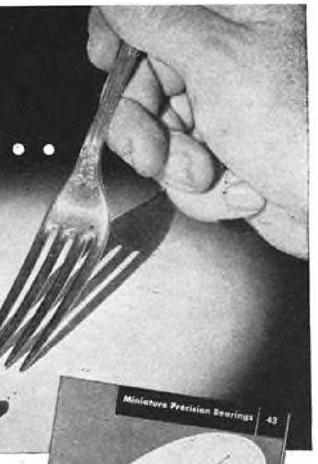

These M P B's — but big in possibilities for your post-war planning.

When space is limited in the lighter, more compact design of the future — you won't have to sacrifice ball-bearing anti-friction advantages.
Specify M P B.

To know what you may expect ask for the Designers Bulletin A-5-44.

MINIATURE *Precision* BEARINGS
KEENE, NEW HAMPSHIRE, U·S·A·

To Reach *EXACTLY* The Right Work Level

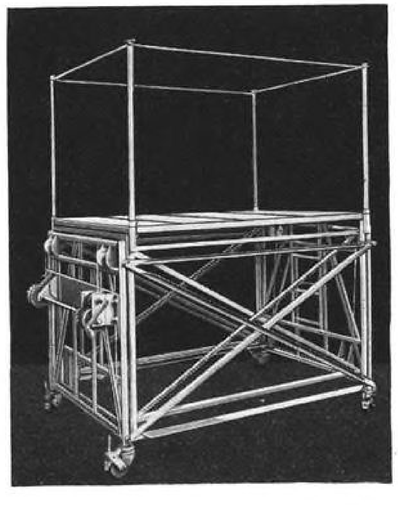

"GOLD MEDAL"
TELESCOPING
Rolling Work Stand

Here is one of the handiest Gold Medal Work Stands for Aviation's up and downs. Moved into position on heavy duty casters, the height is adjusted by means of a geared elevating mechanism operating with steel cables. Guard rail is removable for easy access to work. Sturdy tubular-steel, welded construction.

PLATFORM 4' x 6'

Model	Minimum to Platform	Maximum to Platform
A	4'	6'
B	5'	8'
C	6'	10'
D	7'	12'
E	8'	14'

Standard attachable top sections for additional height are available in 2', 3', 4' sizes.

Write for illustrated bulletin showing the entire line of Gold Medal Work Stands.

THE PATENT SCAFFOLDING CO., INC.
1550 DAYTON ST., CHICAGO, ILL. • 3821-12TH ST., LONG ISLAND, N. Y.
LOS ANGELES, CALIF. • ST. LOUIS, MO. • PHILADELPHIA, PA. •
ATLANTA, GA. • BOSTON, MASS. • SAN FRANCISCO, CALIF. •
PITTSBURGH, PA. • MILWAUKEE, WIS. • MIAMI, FLA.

So they won't have to

FLY A PLANE

Through a

BOTTLE NECK

POOR communication between planes is a dangerous "bottle neck." Bolton Radio Ignition Assemblies, now built into principal combat engines, make it unnecessary for pilots to negotiate such a hazard.

Not only are these assemblies electrically designed to drain off maximum spark interference, but they also have the physical ruggedness to do it uninterruptedly under the terrific grind of modern aerial warfare.

Today this type of advanced engineering is safeguarding the lives of our fighters; tomorrow it will be available for a vital part in the forward march of reconstruction.

BOLTON SHIELDED IGNITION ASSEMBLIES

BOLTON MANUFACTURING CORPORATION

692 CAMPBELL AVENUE · WEST HAVEN · CONNECTICUT

tural members are compromised. Within the author's experience, these additional items will generally add up to about twice the weight of the core itself.

Beyond that, every pound of additional weight in the airplane requires additional gas if the range is to be maintained. Depending upon the airplane and upon the range, from .2 to .8 pounds of fuel and oil will be required per pound added to the weight empty.

This is obtained from the relationship:

$$\frac{\Delta \text{ Fuel Weight}}{\Delta \text{ Weight Empty}} = \frac{\text{Take off Gross Weight}}{\text{Take off Gross Less Fuel}} - 1$$

for constant range, which is derived from the Breguet range formula, as follows:

$$\text{Range} = K \frac{\eta}{C} \frac{L}{D} \log \frac{W_{TO}}{W_1}$$

where W_{TO} = Takeoff weight.
W_1 = Takeoff weight less fuel.

Consider an increase of weight empty, ΔWE. This will require additional fuel, ΔFW. Then, for the same range at the new take-off weight, $W_{TO} + \Delta WE + \Delta FW$,

$$\frac{W_{TO}}{W_1} = \frac{W_{TO} + \Delta WE + \Delta FW}{W_1 + \Delta WE}$$

Whence $$\frac{\Delta FW}{\Delta WE} = \frac{W_{TO}}{W_1} - 1$$

Nor does the penalty end here. Additional tanks must be furnished to carry the additional fuel, and, in the case of military airplanes, bullet-proofing at probably .2 of a pound per pound of fuel must be provided. Lastly, as these weights are added to the airplane, other items will probably be added also, and sooner or later, important components must be increased in size. The landing gear is one such item which often becomes critical, so that it frequently occurs that a substantial weight increase in the landing gear must be charged off to a number of relatively minor increases in the weight empty of the airplane. Further, it is often necessary to maintain the wing loading constant to retain altitude, maneuverability, or landing or takeoff speed. In this case, wing area at perhaps four pounds per square foot must be increased. With a 40-lb.-per-square-foot wing loading, this means another .1 pound for each pound added, including fuel. All this weight in turn requires further increases in the fuel, so that the final increase in weight due to the intercooler could be expressed in the form of an infinite series which does not converge too rapidly.

The above items can be totaled roughly as follows:

Unit Core Weight	1 pound
Structure, ducts, etc.	2
Fuel = .4 x 3 =	1.2
Tanks and bullet-proofing = .25 x 1.2 =	.3
Wing area = .1 x 4.5 =	.5
Landing gear, further fuel, etc. = neglected	
	5.0 pounds

Briefly, it would be unduly optimistic to assess the weight of an intercooler in-

The EUTECTIC Welder

Announcing A NEW WELDING PUBLICATION

THESE FEATURES EACH MONTH

★ Welding Metallurgy
★ Cost Analysis
★ Welding Design
★ Production Ideas
★ Salvaging Tools
★ New Maintenance Economies
★ Useful Tricks and Tools
★

For WELDERS • ENGINEERS

. . . Created to disseminate factual information and knowledge gained from the experience of successful users of EUTECTIC *Low Temperature* Welding, the new welding process which is gaining wide acceptance in production, salvage and maintenance. All metals from aluminum to zinc die-castings can be joined by this process. Applicable with oxy-acetylene torch, metallic-arc, induction and furnace heating.

The EUTECTIC WELDER is prepared by the engineering and research staff of The Eutectic Welding Alloys Company, and supplemented by contributions from users of the process in all fields.

Welders, welding engineers, and metallurgists have acclaimed the arrival of The EUTECTIC WELDER. An engineer writes:

"Found your publication a real boon to our welding department. Please add the following names to your list and make sure to send us current issues every month."

EUTECTIC* LOW TEMPERATURE* WELDING

EUTECTIC WELDING ALLOYS COMPANY 40 Worth Street New York 13, N. Y.

Originators of the Low Temperature Welding Process

GET IT FREE
Mail Coupon Today

*Reg. U. S. Pat. Off.

EUTECTIC WELDING ALLOYS COMPANY Dept. S5
40 Worth St., New York 13, N. Y.
Please send me The EUTECTIC WELDER every month.
Name.....
Company..... Position.....
Address..... City.....

The Tool you'll soon *connect with!*



The torch bows out. Today, small wires are terminated or linked together simply by *Indenting* the connector to the wire with the Burndy HY-TOOL. Speedy and simple . . . *for no torch, no fuel, no acid are necessary.*

But the *big* feature is that simple Indenting *eliminates faulty connections.* Note the cross-sectional view at the left . . . showing how connector and conductor have been *permanently joined* by indenting with the HYTOOL. *The connection is on to stay!*

It's a better electrical conductor, too; since the Burndy HYDENT connectors used are of one-piece, pure copper construction. *No seams or joints to loosen, or increase resistance!*

Why not have the complete story on this modern connecting method at your fingertips. The Burndy HYDENT Catalog, available on request, gives complete details.

Headquarters for connectors

Burndy

BURNDY ENGINEERING CO., INC.
107 EASTERN BOULEVARD, NEW YORK 54, N. Y.
IN CANADA: Canadian Line Materials, Limited, 13

stallation at less than five pounds per pound of core.

In connection with the external drag of the intercooler installation, one point is especially worth emphasizing. The system of ducts which must be provided with the cross-flow air-to-air intercooler makes this unit one of the most awkward to install in the entire power plant. A comparison of typical high and low altitude installations reveals that the difference in simplicity for the pilot, and frontal area are all out of proportion to the size of the intercooler itself. In calculating the optimum intercooler size, these factors, with the possible exception of frontal area, are generally omitted, not because they are unimportant, but because they are difficult to express quantitatively. It is easy to underestimate the increase in frontal area due to the intercooler, moreover, because part of it is in the form of frontal area of other components awkwardly located because of the presence of the intercooler.

In the most fortunate cases, the increase in frontal area due to the intercooler may be limited to little more than the duct entrance area required for the cooling air. This area will be that obtained by dividing the required cooling air flow by about .9 of the velocity ahead of the entrance in the climb condition. If the entrance is located in the slipstream, .9 of the slipstream velocity can be used. Thus:

A_e = entrance area
A_c = area of cooling air face of core
K = core conductivity, cooling air
$= (Q/A_c) / \sqrt{2p/\rho}$
Δp = available pressure drop across core
Assume:

$\Delta p/q = 1$

$q = \frac{\rho}{2} V^2$

V = velocity ahead of the entrance
$K = (Q/A_c)/V$
$A_e = Q/.9V = K A_c/.9$

If $K = .2$ is typical,

$A_e = .22\ A_c$

So that the entrance area is about .2 of the core area. The minimum drag increment is obtained, not with this increase in area, but by using a somewhat larger increase which permits better streamlining. Even this amount is often insufficient to accommodate the core. In some cases, a leading-edge inlet saves frontal area. Within the author's experience, however, this solution entails larger internal losses, great difficulty in avoiding lift losses, and profile drag increases on the wing that are sometimes small but rarely negligible.

The idea that the intercooler can simply be placed in the fuselage or nacelle in a convenient vacant space is, to put it generously, naive. This fact can be substantiated by a glance at the outstanding high-altitude fighters. In some cases, the frontal area of the nacelle, or, in the case of single-engine ships, of the fuselage including all cooling scoops but excluding the pilot's canopy, approaches twice the frontal area of the engine itself, an increase which is due primarily to items like the intercooler. A typical frontal area for an air-cooled installation with

AIR *Control*

VICTORY RESTS ON CONTROL OF THE AIR

NORGREN PRESSURE REDUCING VALVES

. . . guarantee air control for all air-actuated machines, tools and cylinders. Don't starve the tools . . . end chatter and pressure fluctuations. Write for facts! C. A. Norgren Co., 220 Santa Fe Drive, Denver 9, Colorado.

Norgren

TRANSATLANTIC FLIGHT...

Every 20 Minutes

Blazing the airtrails
for future commerce,
and setting the pace
for postwar air travel,
Douglas transports today
maintain "commuter service"
between the U.S. and Britain.

Part of a joint operation
of Air Transport Command,
Troop Carrier Command,
Naval Air Transport Service
and Airlines of the United States,
these Douglas airplanes
round out a flight schedule
of North Atlantic crossings
at the average rate of one
every 20 minutes of the day.

While such frequency
of transatlantic flights
is the product of global war,
it is a pattern for peace
when Douglas transports
in world airline service
will bring all continents
to your very doorstep!

First AROUND THE WORLD · *First* THE WORLD OVER

Douglas
AIRCRAFT

DOUGLAS EQUIPPED AIRLINES: American Airlines — Hawaiian Airlines Ltd. — Braniff Airways — Chicago & Southern Air Lines — Colonial Airlines — Delta Air Lines — Eastern Air Lines — Western Air Lines — Northeast Airlines — Northwest Airlines — Pan American Airways — Pennsylvania-Central Airlines — TWA — United Air Lines — China National Airways — Pan American-Grace Airways — Avianca (Aerovias Nacionales de Colombia) — Cia. Mexicana de Aviacion — Panair Do Brazil — Cia. Nacional Cubana de Aviacion, S.A. — Uraba, Medellin and Central Airways — Cruzeiro do Sul (Brazil) — Primeas Lineas Uruguayas de Navegacion Aerea, S. A. — Aerovias de Guatemala, S. A. — Canadian Pacific Airlines — Australian National Airlines — Royal Dutch Airlines (K.L.M.) — Royal Netherlands Indies Airways (K.N.I.L.M.) — Sabena (Belgian Congo) — Swissair (Switzerland) — A.B. Aerotransport (Sweden) — Indian National Airways — L. A. P. E. (Spain) — Aer Lingus (Ireland) — American Airlines of Mexico — British Overseas Airways (BOAC) (England).

two stages of supercharging and intercooling is 24 square feet. The engine itself has an area of 17 square feet. In extreme cases, even larger ratios occur. In one case, an engine which could be concealed behind a 36-in. disc was used in a nacelle design which could not be concealed behind a 62-in. disc. In another instance, a 9-square-foot engine required a 15-square-foot nacelle. Yet, the "density" of these designs is remarkable. One could scarcely hang his hat inside the P-38 boom between the spinner and the Prestone radiator. Almost certainly, then, an intercooler installation will add frontal area greater by a substantial amount than the cooling air entrance.

Type of Charge-Air Cooling

The airplane designer has the choice of two types of charge-air cooling which are called "intercooling" and "aftercooling," depending upon whether the cooling unit is located between the stages of a two-stage supercharging system or between the second stage and the intake ports. He also has the choice of accomplishing the cooling by means of air-to-air intercoolers or with liquid-to-air intercoolers. The air-to-air system is the conventional arrangement, and the liquid-to-air system has only recently received favorable consideration. The liquid-to-air system differs fundamentally from the air-to-air system in that two units are required, a primary unit for the transfer of the heat from the engine air to the liquid and a secondary unit for the transfer of the heat from the liquid to the cooling air.

Since the second stage of supercharging must be integral with the engine in order to facilitate vaporization of the fuel and distribution between the cylinders the aftercooler must be inserted in a confined region, so that it also is practically integral with the engine. The practical problems involved in ducting in this arrangement appear to be insurmountable in the case of the air-to-air aftercooler, so that only the liquid-to-air aftercooler needs to be considered. Likewise, since the liquid-to-air system breaks down the cooling process into two separate steps, it practically doubles the intercooler effectiveness required for a given temperature difference between engine and cooling air. Accordingly, the liquid-to-air intercooler can immediately be eliminated from consideration because of the penalty in weight and size of the units which would be involved. Finally, then, we need only compare the liquid-to-air aftercooler with the air-to-air intercooler. This means that a discussion of intercooling versus aftercooling cannot be separated from a discussion of air-to-air versus liquid-to-air systems.

The fundamental advantages of the two systems are immediately obvious. The aftercooler works with higher temperature differences, due to the two stages of compression which precede it. The intercooler, on the other hand, makes possible higher blower efficiencies in the second stage of supercharging. As in many other airplane design problems, the deciding factors are not the obvious ones, and a decision as to which arrangement to use

Priceless SERVICE

Thousands of tubes of TITE SEAL have been supplied for "flyaway kits".

TITE SEAL is a priceless thing to have in a repair kit when emergency repairs are necessary because TITE SEAL's vibration proof adhesiveness makes even hurried emergency repairs leakproof.

TITE SEAL gasket and sealing compound was developed expressly for use in aviation motors and equipment. Because it is non-hardening, vibration-proof and pressure-tight and unaffected by extremes in temperature, it is specified and used by most of the leading aviation manufacturers.

There is a density of TITE SEAL for every gasketing and sealing need. For Safety's Sake, always specify TITE SEAL.

FOR
DETAILED INFORMATION
ABOUT

TiteSeal

RADIATOR SPECIALTY COMPANY
CHARLOTTE 1, NORTH CAROLINA
Branches • LOS ANGELES 1, CALIFORNIA • TORONTO 2, CANADA

If your present manufacturing operations or postwar plans involve product parts where light weight is essential, consult Westinghouse.

Skilled Micarta engineers will be glad to study your product and to analyze its applications. And they will give you the benefit of 35 years' experience with industrial plastics.

This experience is particularly extensive with respect to aircraft applications . . . for example,

MICARTA IS THE IDEAL MATERIAL for airplane fairleads, guides and pulleys. Its weight is only one-half that of aluminum.

ON FIGHTERS AND BOMBERS, literally millions of Micarta parts are in constant use. Micarta is also used for control and instrument panels, antenna masts, terminal blocks, spacers and bearings . . .

AND IN MANY OTHER INDUSTRIES . . . hundreds of thousands of Micarta products are in use where light weight and dependability are vital.

In the majority of these applications Micarta is used as a replacement for critical materials and is serving better.

We urge you to find out the facts about Micarta today. Wire or phone your nearest Westinghouse office or write to Westinghouse Electric & Manufacturing Company, Dept. 7-N, East Pittsburgh, Pa., and ask for a copy of the new Micarta Data Book—B-3184. J-06339

TYPICAL MICARTA TOUGH JOBS IN WAR APPLICATIONS

Aircraft structural parts	Protective helmet liners
Industrial gears	Aircraft control pulleys
Instrument panels	Bus supports
Steel mill bearings	Fuse mountings
Thrust washers	Insulating washers
Marine bearings	

Westinghouse
PLANTS IN 25 CITIES OFFICES EVERYWHERE

Micarta *The* INDUSTRIAL PLASTIC

in a particular installation can best be reached by consideration of a number of small effects which require judgment rather than analysis to evaluate.

With the liquid-to-air aftercooler, one of the biggest advantages, from the standpoint of the airplane designer, is the flexibility in power plant installation arrangement which it makes possible. The awkward arrangement of ducts in the cross-flow air-to-air intercooler and their large size makes its location very critical and difficult to work out efficiently. It often requires a compromise in a great many other units of the power plant installation. Both units of the liquid-to-air aftercooler system are relatively compact, and require only one pair of air ducts in addition to the relatively small liquid coolant lines. Furthermore, the secondary unit of the aftercooler system can be removed from the engine compartment altogether and placed in any suitable location in the airplane without concern over the problem of ducting the engine air to the unit and back again. This makes possible its location in thin wings where a cross-flow unit would be quite impractical, or in remote portions of the fuselage or nacelle. This flexibility is especially advantageous in the case of the two-stage geared blower because the auxiliary stage of the blower can be located close to the engine without having to leave room for ducts to a large air-to-air intercooler. In the case of the turbosupercharger, the auxiliary blower is generally located far enough from the engine that space can be found for an air-to-air intercooler between the blower and the engine without prohibitive dislocation of the other elements of the installation. On the other hand, the crowding problem of the primary unit of the aftercooler is severe enough that it is doubtful whether maintenance problems would be alleviated by the use of this arrangement in even a majority of cases. Certainly the weight of the liquid-to-air system will be greater. Likewise, in the upright liquid-cooled engine, the location of the primary aftercooler unit may be such as to seriously interfere with pilot visibility. Another point is that the higher carburetor temperatures encountered with the aftercooler system may prove a very real advantage in improving the vaporization of fuel under adverse conditions. Finally, the duct losses involved in the turns into and out of the air-to-air intercooler subtract from the critical altitude of this type of installation. These losses probably can be avoided in the aftercooler arrangement.

Taking into account the various factors, it is seen that the two systems are comparable from the airplane designer's standpoint. It is doubtful, however, whether it would ever be desirable to suffer the complication and weight caused by the installation of a complete Prestone system on an air-cooled engine in which such a system was not already in existence for engine cooling. This is especially true since the shape of the air-cooled engine tends to create more space behind the engine for the installation of the air-to-air intercooler. Thus, in general, the increase in frontal area chargeable to an

The construction of modern aircraft carriers posed many perplexing problems.

Not the least important of these was, first—*how to get planes from hangars down deep in the ship's belly up to the flight deck—fast?*

And second—*how to do it so that the elevators, carrying tremendous loads, level flush with the flight deck?*

Sedgwick engineers solved both problems by developing the Roto Drive aircraft elevator.

Roto Drive is a simple principle of operation based on the controlled movement of endless chain. Because it is so simple it is adaptable. It can be applied to many "man" handling and materials handling problems.

But we don't ask you to take our word for it. We don't expect you to.

We hope, instead, that you're skeptical—that you ask for proof of Roto Drive's adaptability and performance. We hope you will want to see how Roto Drive can help solve *your* lifting, hoisting, and materials handling problems.

Take a tip from an aircraft carrier. Send for a Sedgwick engineer. We think we can prove Roto Drive is everything we say it is—*and more.*

We think you'll be convinced that Sedgwick Roto Drive can help solve some of your production and maintenance and repair problems by helping move men, material and merchandise better and faster.

(N.B.—To military airfield and commercial airport operators—to airplane manufacturers and allied industries, we offer complete design, engineering and manufacturing facilities to produce precision engineered lifting, hoisting and materials handling equipment.)

"MEN WHO KNOW ARE SOLD ON SEDGWICK"

Sedgwick MACHINE WORKS
146 WEST 15TH STREET NEW YORK 11, N. Y.
Since 1893 designers and manufacturers of specialized lifting equipment
ELEVATORS • DUMB WAITERS • HOISTS • ROTO-WAITERS • MATERIALS HANDLING EQUIPMENT

better drawings... FASTER!

with CRAFTINT DOUBLETONE DRAWING PAPER . . .

. . for Illustrating MANUALS HANDBOOKS CATALOGS

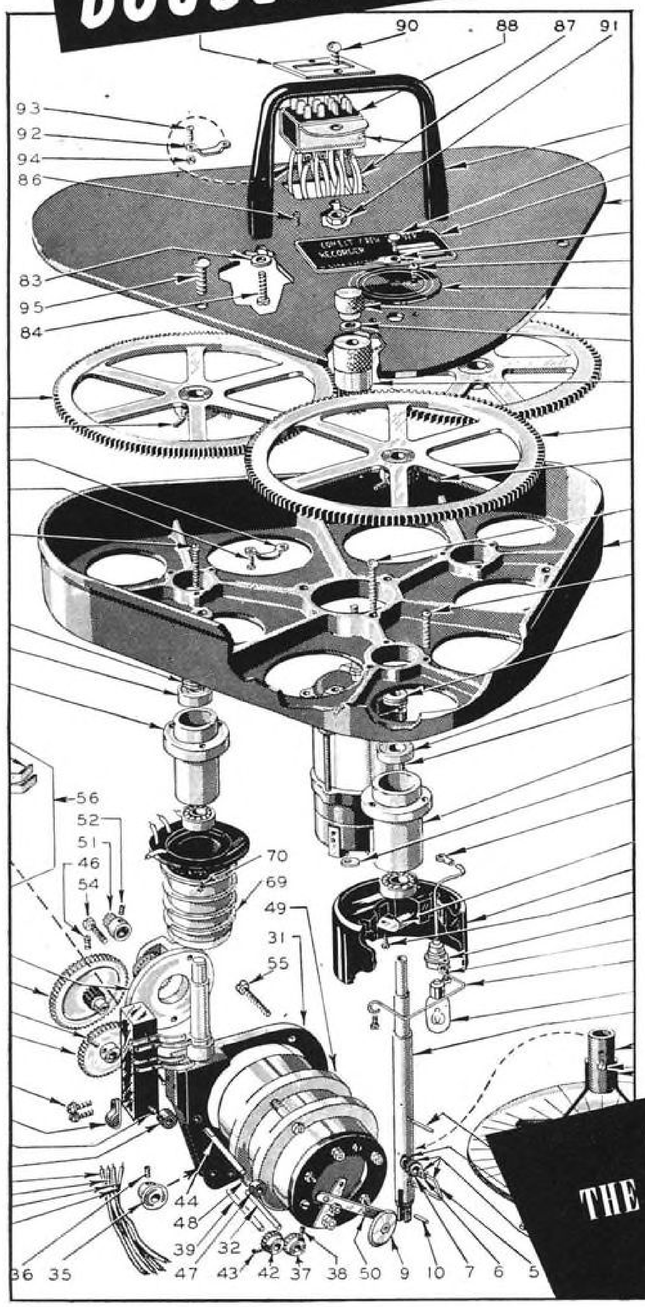

Here is a drawing, one of several hundred made by Link Aviation Devices, Inc., Binghamton, N. Y., which is typical of the excellent results produced on Craftint Doubletone drawing paper. Note the fine detail and accuracy with which each part is portrayed.

The automatic shading feature of CRAFTINT Doubletone not only gets results infinitely superior to hand shading, but also saves up to 85% in man hours.

For illustrating handbooks, manuals and catalogs—for production line drawings, the Craftint method has no equal. Its simplicity, clarity and speed of production is doing much to help the war effort.

CRAFTINT DOUBLETONE is in wide use throughout the Aviation and kindred industries. Craftint drawings are reproduced as straight line etchings, eliminating expensive and time consuming Bendays and half tones.

There is no industry where drawings are used, that cannot employ Craftint Doubletone to advantage.

CRAFTINT DOUBLETONE VELLUM

See specimens of Craftint drawings on pages 105 to 115 in the new book just issued by the Air Service Command—"A. N. Specifications . . . Guide to Proper Preparation of Technical Handbook Art and Manuscript for Army and Navy".

This fine tracing paper contains the Craftint Automatic shading feature and gives you shaded Van Dyke, Ozalid and black and white prints. Eliminates cross hatching and hand shading.

Free A complete demonstration kit of Craftint Doubletone will be sent to responsible companies without cost. Write for it today. No obligation.

THE CRAFTINT MANUFACTURING CO.
200 ST. CLAIR AVE.
CLEVELAND, OHIO

air-to-air intercooler would probably be less in the case of an air-cooled engine than in the case of an equivalent liquid-cooled engine. On the other hand, the liquid-to-air system requires relatively little additional trouble in a liquid-cooled engine, and its greater compactness and flexibility are of more importance in such installations.

In large airplanes, generally, power plant interchangeability and maintenance dictate a trend toward concentration of the power plant in the nacelle. Also, this field has thus far at least been dominated by the air-cooled engine. Consequently, the use of liquid-to-air intercooling does not appear probable in such installations.

On the other hand, on smaller airplanes, the decentralization of the power plant may be extremely desirable for improved aerodynamic efficiency, and the possibility of isolating the secondary cooling in a separate unit located at a distance from the nacelle and probably combined with the Prestone radiator may be a big advantage. Therefore, in small airplanes with liquid-cooled engine installations, the liquid-to-air aftercooler appears to offer definite advantages to the airplane designer.

Ultimately, as critical altitudes are pushed higher and higher, the power required to supercharge the engine will become of primary importance. For such extreme altitude operation, two stages of intercooling may be desirable, one an intercooling stage and the other an aftercooling stage. In such an arrangement, the liquid-to-air system appears to be definitely superior from the standpoint of compactness.

Installation Problems

The primary installation problem is, of course, the location of the unit. The air-to-air intercooler is the most difficult of all engine accessories to locate satisfactorily because it is necessary to provide four air ducts to it as against two for the Prestone and oil radiator; all four of these are of about the same relative size as the air ducts approaching and leaving the Prestone radiator; the charge air and cooling air both must generally travel in a fore-and-aft direction, so that one system must be compromised to the extent of two 90 deg. turns in order to conduct the air laterally or vertically through the core. This problem could be avoided to some extent in a counter-flow installed of a cross-flow type of intercooler. A discussion of the relative merits of these types will be left to those better qualified: it is enough for our purposes that a good counter-flow cooler is not now available commercially and that a good solution to the header problem taxes the imagination.

Considering, then, only the cross-flow intercooler, the frontal area of the core and ducts will always be greater than the core face even if space limitations permit tilting the core. This latter device reduces the over all height or width and reduces the angles through which the crossing air must be turned, but if it crowds adjacent items or compromises structure, the gain is offset by increased frontal area, less accessibility, or increased weight. In any event, the frontal area required for installing the air-to-air intercooler will be from 120 to 200 percent of the core face, while the liquid-to-air cooler will require a header whose area is perhaps only 20 percent of the core area and whose shape is not critical, besides coolant lines of an inch or two in diameter. Thus, while it is difficult to put an air-to-air intercooler in a fighter wing, Prestone and oil coolers so installed are common.

The header problem for the crossing air is particularly difficult. Large pressure losses are likely, and uniform flow over the core face is rare. It is not uncommon to encounter an area expansion of 100 cent or more in the width of the core, coincident with a 90 deg. turn and a transition from a circular to a rectangular section. This situation is hardly improved by casual recommendations of 14 deg. maximum expansion angles in straight ducts, of ratios of outer to inner radius of not greater than two, etc. The use of sheet metal guide vanes has the disadvantage that even if both the duct and the vanes are made very heavy they invariably crack out under vibration and go through the engine.

In cases of restricted header space, it may be worth-while to consider increas-

ONE CALL does for dozens

CABLE
CONNECTORS
FUSES
CONNECTOR PANELS
CIRCUIT BREAKERS
MOTORS
FLEXIBLE CONDUIT
RELAYS
SWITCHES
TERMINALS
TUBING
WIRE

Many of your inquiries for electrical parts and supplies to be installed in aircraft can be included in a *single call*, when you make GRAYBAR your source of supply.

An experienced GRAYBAR Man who knows your needs and schedules will do the necessary follow-through. You save inquiry time, ordering time, delivery time.

In all important plane-building centers, a local call to GRAYBAR puts you in line with our nationwide service.

GraybaR
IN OVER 80 PRINCIPAL CITIES
EXECUTIVE OFFICES: GRAYBAR BUILDING, NEW YORK 17, N. Y.

GraybaR 75 YEARS OF Electrical Distribution

ing the frontal area of the nacelle or fuselage to make possible a better turn into the core. An engineering approach to the problem can be achieved by comparing the performance losses resulting from the loss in brake horsepower due to pressure loss in the duct system if the bad turn is retained on the one hand, and the effective brake horsepower loss due to the higher external drag on the other. This is best illustrated by an example.

Consider an 1,800-brake-horsepower engine in an airplane capable of 450 miles per hour at 30,000 feet. (All numbers, of course, are purely hypothetical.) First, the drag increase per square foot increase in frontal area is calculated, and this drag increase translated into equivalent loss in brake horsepower. In an actual case, the designer will know how much increase in frontal area will be required to improve the bad spot in the induction system layout. He can also obtain a fair estimate of the reduction in pressure drop which will be realized with the better system. This reduction in pressure drop will provide an equal increase in manifold pressure, which can be translated directly into brake horsepower. The two alternatives are then compared on the basis of brake horsepower.

In the case under consideration, if the frontal area is increased, there will be an effective loss in brake horsepower of about 30 brake horsepower per square foot increase in area for high speed operation at 30,000 feet, and about 75 brake horsepower per square foot at sea level at the same speed. These figures are based on an assumption of 75 percent propeller efficiency and a drag coefficient of .08 based on the increase in frontal area.

In calculating the saving in power loss due to cleaning up a bad turn, the assumptions will be kept on the optimistic side so that the *maximum* probable saving will result. This will assist in evaluating the comparison. Now, the pressure loss in a bad turn may easily equal the dynamic pressure in the duct upstream of the turn, which will be called "*q*", and it is a very good turn indeed with costs less than $\frac{1}{4}$ *q*. The turn can be improved by expanding the duct upstream of the turn of increasing the ratio of the inside to the outside radius or both. Either change would probably increase the frontal area. A fairly optimistic figure for the reduction in pressure drop might be about half of the *q* ahead of the turn in the original set-up. With a specific air consumption for the engine of about .12 pounds per brake horsepower per minute, a velocity of about 200 feet per second occurs in a six-inch-diameter circular duct, the absolute pressure being about 35 inches of mercury, and the temperature about 285 deg. F. The corresponding *q* is 80 pounds per square foot, so the likely saving is .5 inch of mercury. For an engine which will produce 1,800 brake horsepower at 60 inches of mercury manifold pressure, a reasonable estimate of the variation of power with manifold pressure at constant rpm. would be about 35 hp. per inch of mercury, so that an improvement of .5 inch would produce about 18 additional brake horsepower.

Thus, in the case considered, we can only justify an increase in frontal area of half a square foot at the most in order to make a bad turn into a good one. An increase in diameter of a typical air-cooled engine cowling of only $\frac{3}{4}$-inch will produce an additional half square foot, however. In the preliminary phases of a design, before tooling and production consideration make such studies purely academic, a power plant installation can be laid out both ways, that is, first with all ducts squeezed to the utmost, and second, with the ducts designed for moderate losses. A comparison of internal and external performance of the two arrangements will yield an answer, which, if interpreted with judgment, will serve as a reliable guide. It will seldom be found worthwhile to sacrifice frontal area to save duct losses.

It should be noted that there is another way of looking at the above comparison which places the increase in frontal area in an even less favorable light. If the frontal area is increased, the speed attainable with a given engine power is reduced at all altitudes and cannot be regained. The effective power loss is especially severe at low altitudes, which are not always insignificant to the high altitude

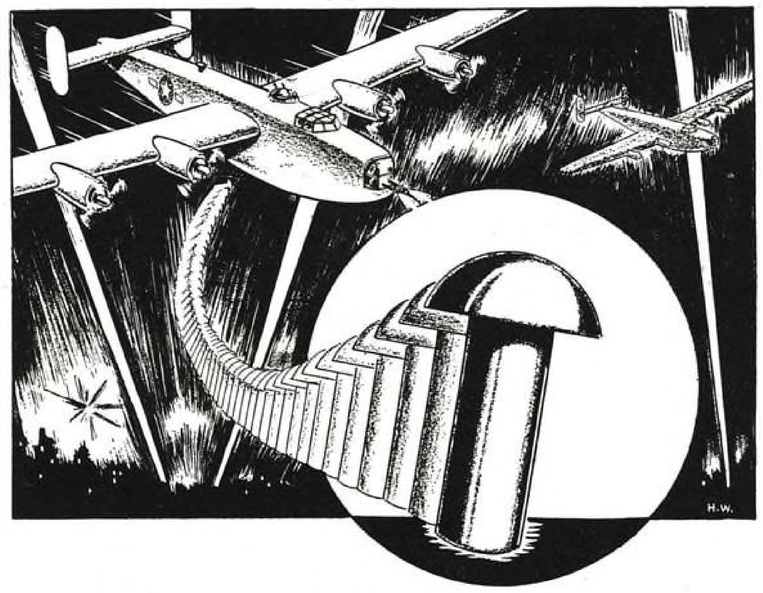

WHAT EVERY PRODUCTION ENGINEER KNOWS

Soon now this interlude we call "war" will end and the current of life will return to normal channels—which, in industry means supplying people's peace needs. For several years there will be a big demand for automobiles, airplanes and their accessories. How these markets will affect your particular company you are in best position to judge, but how rivets can best fit into your product can most satisfactorily be determined by a joint meeting of your design engineers and our rivet experts.

The urgencies of war have shown the aviation industry better ways of doing many things. In the fastening field solid and tubular rivets have found favor where permanence, tightness and resistance to vibration or shock is essential. If you are interested in learning how such technical improvements might be adapted to your assemblies on peace time products, our engineering staff can tell you.

For those in the aircraft industry who are concerned with rivets a desk chart giving valuable factual information is yours on request. Use attached coupon.

Please send me your "Flying Rivet" Desk Chart.

Name ..... Position .....

Company ..... Address .....

★ ★ ★ ★ ★

The MILFORD RIVET & MACHINE CO.
Post Road, Milford, Connecticut
and
General Rivet & Machine Division, Elyria, Ohio

A Partial List of Industries for Which Presstite has Successfully Developed Special Sealing Compounds:

For the Aircraft Industry:
Sealers for—
Integral Fuel Tanks
Fuselage Seams
Drop-off, Expendable Fuel Tanks
Gun Turrets
Synthetic Glass
Instruments
Intercoolers
Air Ducts
Insulating Dissimilar Metals
Seaplane Floats

For the Refrigeration Industry:
Sealers for Domestic and Commercial Refrigerators
Bonding and Sealing Low Temperature Insulation in Refrigerated Rooms

For the Railroads:
Sealers for Insulating, Soundproofing and Weatherproofing of Railway Cars—Sealing Car Windows and Spot Welded Seams

For the Building Industry:
Roof Coatings, Caulking, and Waterproofing Compounds

For the Shipbuilding Industry:
Insulation Adhesive and Sealers—Rust Preventive Compounds

For the Automotive Industry:
Special Adhesives and Sealers

For the Construction Industry:
Sealers for Jointing Sewer Pipes
Sealers for Waterproofing Excavation Work

Miscellaneous:
For Glazing Greenhouse Windows
Extruded Caulking Compounds
Ammunition Paints
Plus Many Special Products for the Army and Navy

Our Engineering, Technical, and Laboratory facilities are at the service of any industry with a sealing problem.

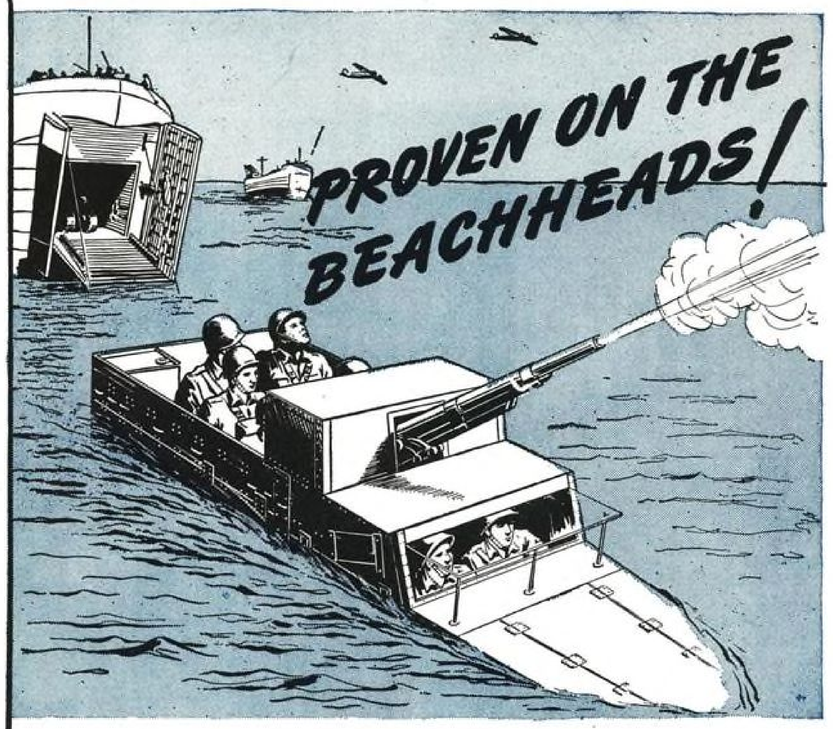

PRESSTITE Sealer
Enables Vehicles to Land with Motors Completely Submerged

Developed especially to meet the emergency demands of War, a Presstite Sealing Compound now seals such vital motor parts as spark plugs, distributors, coils, and carbureters, so that land vehicles may be driven ashore from landing craft even with motors completely under water. This requires a sealer that must retain its adhesive and waterproofing qualities under exceptionally adverse conditions, protecting such motorized equipment as tanks, half-tracks, trucks, tank destroyers, etc., so they can run through water — then head across the beaches for the land attack.

Presstite's wide experience in developing sealing compounds for industry made this achievement possible. Another example is found in Presstite Sealing Compounds that seal aircraft fuel tanks, fuselage seams, seaplane floats, gun turrets, and pressurized cabins — all playing an important wartime role.

It will pay you to bring *your* sealing requirements to Presstite's *sealing specialists*. Our pre-war and wartime experience with many industries and many problems may well enable us to solve yours, too.

PRESSTITE SEALING COMPOUNDS

PRESSTITE ENGINEERING CO, 3910 Chouteau Avenue, St. Louis 10, Mo.

Sales Offices: Los Angeles 21, Calif., 2145 Bay St. • Detroit 2, Mich., 6432 Cass Ave.

fighter. Duct losses, and for that matter, intercooler pressure drops themselves can be made up at altitudes below the critical altitude by increasing the output of a turbosupercharger or opening the throttle wider with a geared blower. Thus duct losses simply reduce the critical altitude without affecting the performance below the critical,* whereas increased frontal area affects the performance at all altitudes. In the example cited, the loss of .5 inch of mercury in one bad turn would reduce the critical altitude about 1,000 feet. This is a severe loss, but below 29,000 feet the turning loss would have no effect.

Miscellaneous Installation Problems

One installation problem which gives considerable difficulty is the structural problem. Not only must the primary structural loads be carried around the intercooler duct system, but also the intercooler must be insulated from the structural deflection. This is usually accomplished with rubber bushings which also help to reduce the vibration to which the intercooler is subjected. The necessity for four ducts to the core make the problem of routing structure around the intercooler particularly difficult. Accordingly, there is generally a considerable weight penalty chargeable to the intercooler installation which is greater than for the Prestone and oil cooler installations. Also, the structural difficulty for the intercooler limits the locations which may be selected.

The problem of protecting the induction system and especially the charge-air coolers from the pressures developed in back-fires, has not yet been satisfactorily solved. The use of back-fire screens is impractical because of the large loss in manifold pressure which results from their use. Various types of relief valves have been tried without success. The only practical answer at the present time seems to be to design the systems for internal pressures of about 100 pounds per square inch, which appears to be sufficiently high to provide reasonable assurance against damage. This requirement results in a considerable weight penalty.

The fatigue problem is acute in the charge-air system because of the large variation of temperatures and pressures to which the system is subjected. Also, space, and in many cases, aerodynamic conditions, favor non-circular ducts. Under high differential pressures, these ducts tend to become circular, and the large deformations encountered produce crackling.

A number of attempts have been made to employ automatic regulation of the carburetor air temperature by thermostatically controlling the outlet flap on the intercooler cooling-air duct. Unfortunately, there is little thermal capacity in the system, so that with air-to-air intercoolers, extremely rapid response is needed from the control. For instance, if the airplane is cruising at low power at high altitude, and the pilot suddenly increases the power, the carburetor air temperature reaches its maximum value as soon as the engine comes up to speed, or in the case of the turbosupercharger, as soon as the turbo speed is increased. In general, a few seconds of detonation will cause severe engine damage so that the practically instantaneous cooling is needed. Under the circumstances in which sudden power increases are necessary, the pilot should not have to concern himself with the adjustment of intercooler flaps. Unfortunately, thermostatic controls having an adequate rate of response are not yet available.

The problem of preventing excessive leakage in the system has found no entirely adequate solution. Leakage, however, is not as serious as some other difficulties because at altitudes below the critical it causes very little power loss. This follows from the fact that the supercharger is generally working on the flat part of the curve of efficiency against air flow. Moderate increases in the air flow do not have any appreciable effect on the efficiency. However, at the critical altitude, with the turbosupercharger, the output is limited by the maximum turbo rpm. and with the geared blower, full throttle is the limitation. In either case, an increase in the air flow due to leakage makes available a reduced pressure rise from the blower with consequent loss in critical altitude.

* Neglecting a slight increase in charge-air temperature and a back pressure from the turbo.

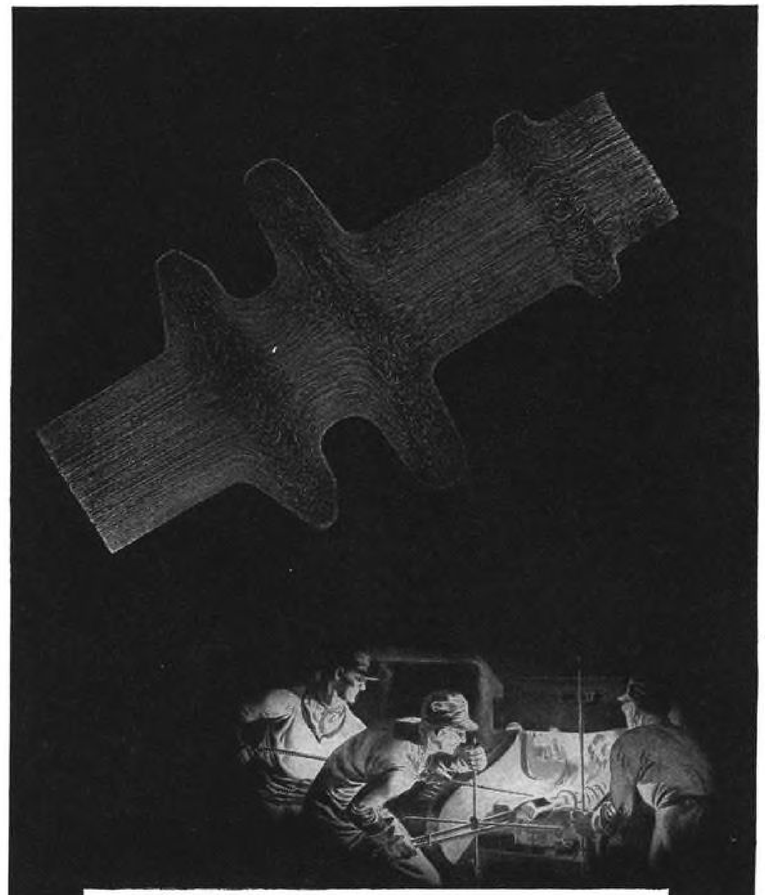

See the grain flow, sometimes called fibre flow in this aircraft engine gearing forging—giving strength greater than any other shape of equal weight — ability to withstand unpredictable loads.

WYMAN-GORDON
Forgings Laboratory Controlled
WORCESTER, MASS. HARVEY, ILL. DETROIT, MICH.

A *Panelyte** LAMINATED PLASTIC PART MAY SOLVE *Your Problem*

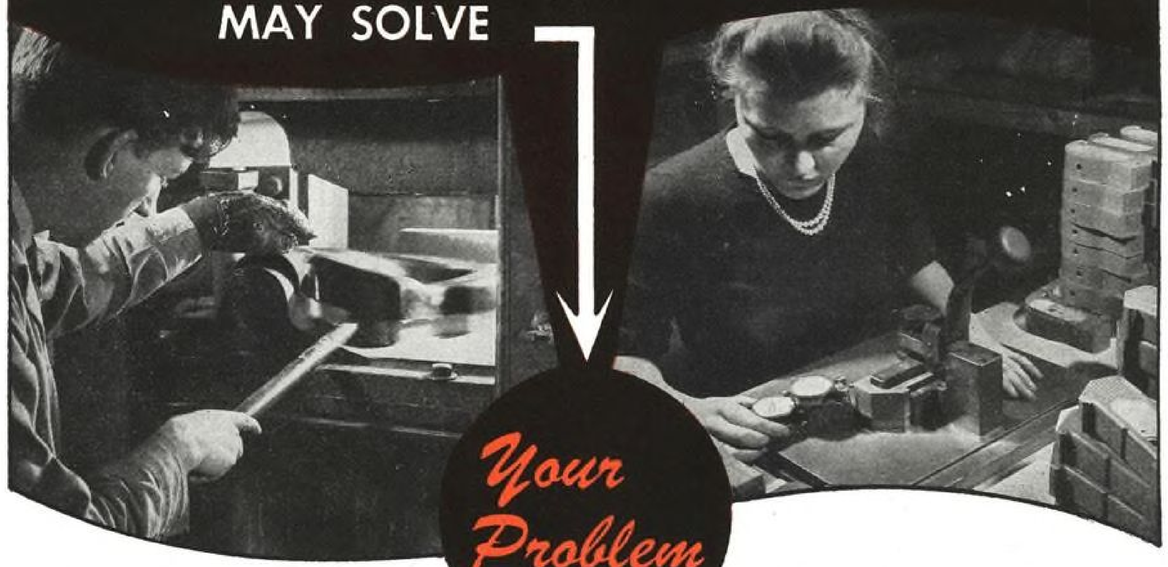

Intricately shaped PANELYTE part used on Wright Cyclone Engines being removed from mold.

Final guage inspection of precision fabricated part, mass produced for Hamilton Standard Propellor Co.

Are you concerned with the design or the mass production of an intricate part? We may be able to save you weeks of experiment . . . and money as well.

Does the application demand light weight . . . high structural or dielectric strength . . . dimensional stability . . . low water absorption . . . resistance to heat and moisture? PANELYTE, the structural plastic manufactured in 35 paper, fabric, wood veneer, fibre glass and asbestos grades, has these properties.

1,235 resin formulations have been developed by PANELYTE engineers, and the majority of the resins manufactured in our own plant. If one of these is not exactly right for your application we will develop one.

Production snags? Proved PANELYTE molding and fabrication techniques permit straight-line *mass* production of intricate parts.

Design difficulty? PANELYTE engineers, credited with significant advances in mechanical and structural design, will be happy to work with you. Check with us on *any* question involving the use of laminated resinous plastics.

Write for PANELYTE Data Book.

PANELYTE *the structural plastic*

PANELYTE DIVISION
ST. REGIS PAPER COMPANY
230 PARK AVENUE
NEW YORK 17, N. Y.

Sales Offices: Atlanta, Boston, Chicago, Cincinnati, Cleveland, Dallas, Denver, Detroit, Kansas City, Los Angeles, Montreal, New Orleans, St. Louis, St. Paul, San Francisco, Seattle, Syracuse, Toronto, Trenton, Vancouver

ARMY NAVY

* MASS PRODUCTION OF SHEETS, RODS, TUBES, MOLDED FORMS, FABRICATED PARTS

Makin' the Grade... A LYCOMING FEATURE

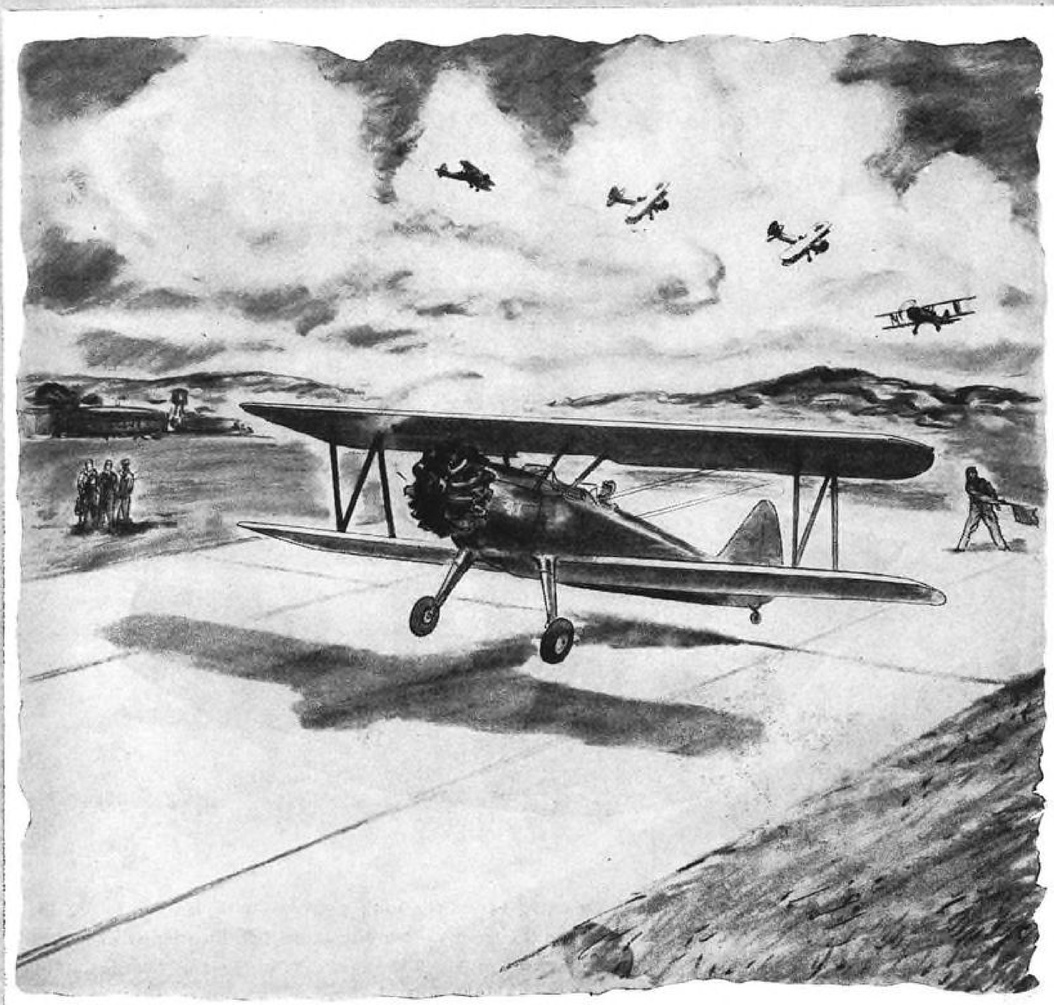

WHEN YOU COMMENCE TO GET YOUR "DECK LANDINGS" DOWN PERFECT

Sketched from life by Clayton Knight

BUY WAR BONDS



Lycoming R-680 nine cylinder radial 225 to 300 H.P. engines, used in Army and Navy primary trainers, advanced and transitional trainers and liaison observation airplanes. A proven engine.

AN AVCO PRODUCT

The pilots America can count on the most are simply you who get every step of your training down pat. Behind a dependable engine is the same story. A Lycoming stands out for dependability because each operation in its manufacture is something we've had "down perfect" for a long, long time.

LYCOMING
AIRCRAFT ENGINES

LYCOMING DIVISION —— THE AVIATION CORPORATION, WILLIAMSPORT, PA.

"LOCKHEED VENTURA" PV-1

The Scourge of the Submarine

is equipped with

NORMA-HOFFMANN PRECISION BEARINGS

Built by Lockheed Aircraft Corporation, Burbank, Calif.

With extra range for long patrols—with reserve speed to overtake the enemy—heavily armed, and loaded with depth bombs and torpedoes to make its "kill"—this deadly land-based U. S. Navy Patrol Bomber has proved its dependability in countless escort and patrol missions against the submarine "wolf-packs." And to its fine performance, NORMA-HOFFMANN PRECISION BEARINGS contribute the requisite rigidity, sensitiveness and stand-up-ability at numerous vital points in the plane, power plant and equipment.

In practically all American-built planes, on every fighting front as well as in transport and escort service—in controls, engines, instruments, radios, cameras, gun mounts, and other equipment—NORMA-HOFFMANN BEARINGS are rendering that efficient and dependable service which only PRECISION methods and standards can produce. Write for the Catalog. Let our engineers work with you.

NORMA-HOFFMANN BEARINGS CORP'N, STAMFORD, CONN. • FOUNDED 1911

PRECISION BALL, ROLLER AND THRUST BEARINGS

TO WIN THE WAR: WORK—FIGHT—BUY WAR SAVINGS BONDS!

Fast...

FLOOR-TO-FLOOR TRANSPORTATION

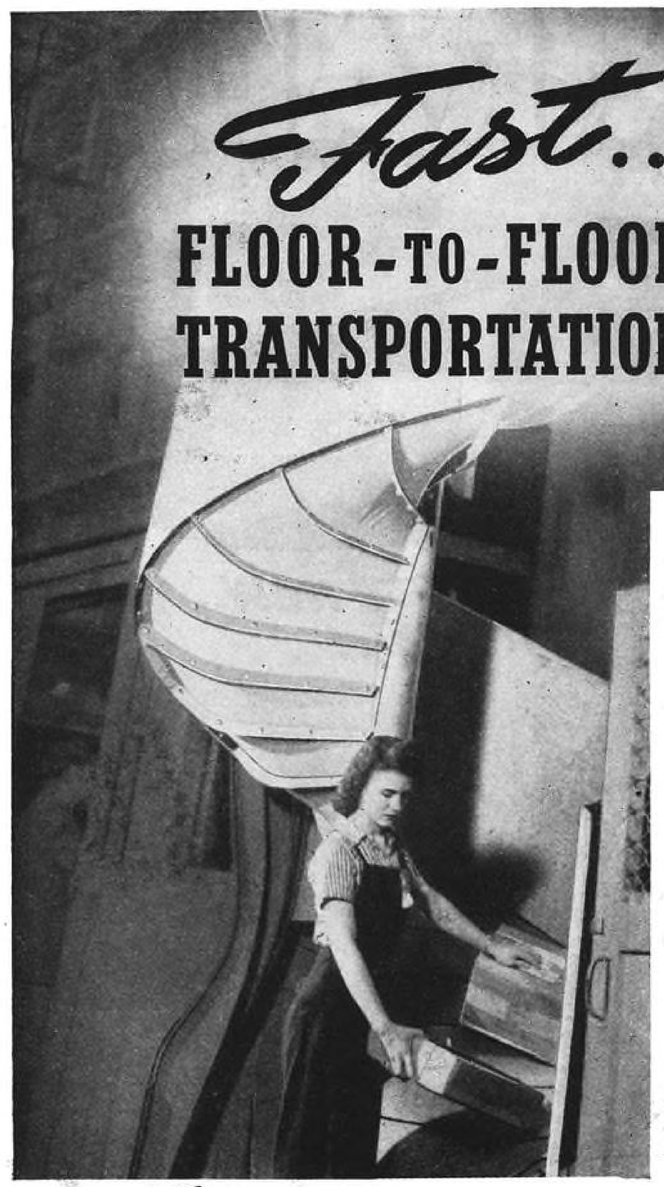

Standard Spiral Chutes move merchandise from upper to lower floors . . . with SPEED and minimum handling cost

If you have material on the second floor—or the twentieth, for that matter — and want to get it to street level or the basement, there are several methods you could use. You could carry it down, step by step, or use an elevator.

A better method — quickest and lowest in cost — is the spiral chute. The spiral chute has volume carrying capacity, runs up no power bills, and is always ready for service. It reduces handling costs and saves time.

Scientifically pitched and skillfully designed spiral chutes are part of Standard's wide line of handling equipment, developed during almost forty years of solving industry's inside-the-plant transportation problems.

Get complete information on Standard Spiral Chutes and how they can be used to advantage for the handling of a wide range of products and merchandise.

Write for valuable reference book—"Conveyors by Standard"—Catalog No. A-54

CONVEYORS by Standard

STANDARD CONVEYOR COMPANY

General Offices: North St. Paul, Minnesota

Sales and Service in Principal Cities

STANDARD

Gravity and Power

CONVEYORS

★ ENGINEERED FOR FASTER PRODUCTION ★

KEN-RAD

ELECTRON TUBES

TRANSMITTING TUBES
CATHODE RAY TUBES
SPECIAL PURPOSE TUBES

KEN-RAD

EXECUTIVE OFFICES
OWENSBORO · KENTUCKY
EXPORTS 15 MOORE STREET NEW YORK

RECEIVING TUBES
INCANDESCENT LAMPS
FLUORESCENT LAMPS

Rain-Check For a Soldier!

"AL SAYS he wishes he could do more in this war ... but I bet he's doing plenty where he is.

"Some guy, Al Heflin! He was my Leadman in Department 6310 back at Solar ... a regular top sergeant for getting things done even if he had to *invent* a way ... like his 'Leg-Puller', a tool that lines up a certain airplane exhaust manifold part in his department so accurately it fits the next assembly like a glove. Saves a lot of time and 'squawks', that 'Leg-Puller'.

"Al's just one of many Solar workers all in there pitching. They're doing a swell war job with their special 'know-how' on *stainless steel*. It's a tough metal to form, but a honey for results.

"I've got a rain-check on my old job at Solar and when I get back it will be fun to work on stainless steel again."

ARMY E NAVY

SOLAR

STAINLESS STEEL PRODUCTS

SOLAR AIRCRAFT COMPANY ★ SAN DIEGO 12, CALIFORNIA

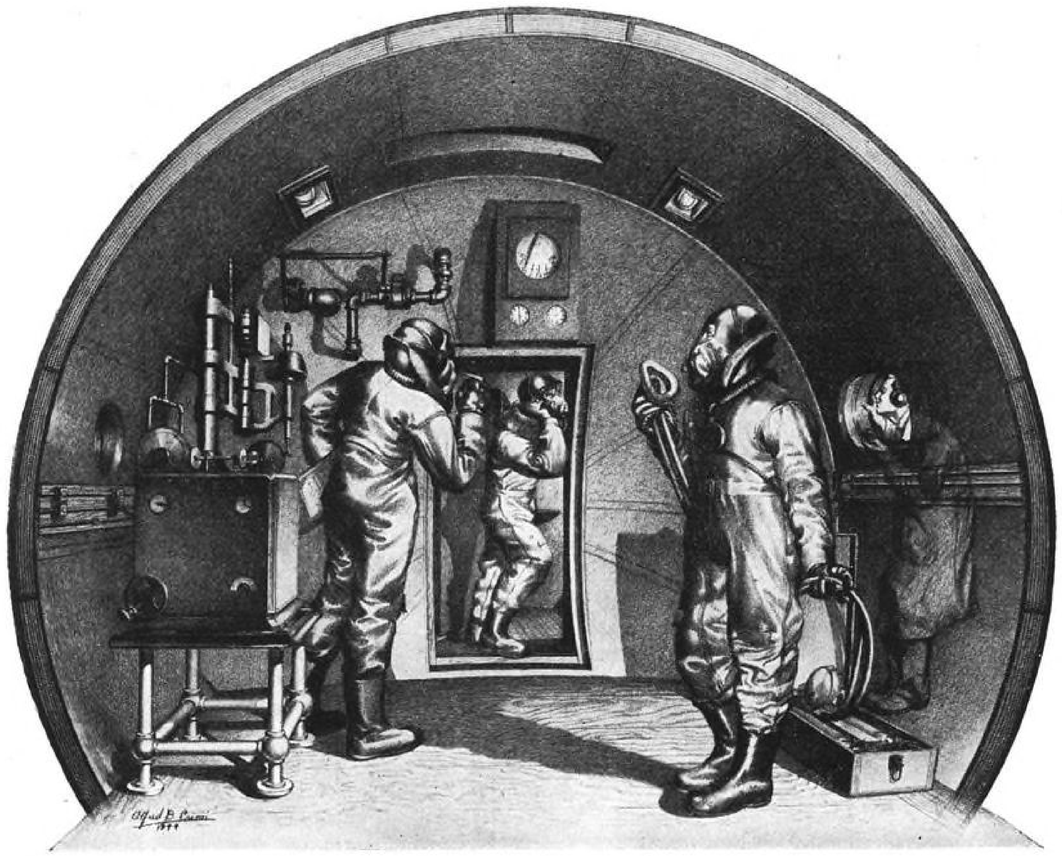

This will take a man higher even than a P-51.

THIS scientific apparatus looks quite earth-bound.

But, for experimental purposes at least, it can take a man higher than any aircraft ever built.

It is Sperry's new High Altitude Laboratory, constructed through the cooperation and assistance of our Government, and dedicated to the service of our Country in memory of Frederic Blin Vose, a Sperry engineer who lost his life in the performance of his duties in the war effort.

This laboratory helps find the answers to questions like these:

How does man react in the stratosphere when the sub-zero cold bites through his heated flying suit? Will an instrument that works perfectly at 2000 feet, "conk out" at 40,000 feet?

The laboratory can mechanically simulate atmospheric pressures equivalent to those met at altitudes over 45,000 feet. It duplicates temperatures as low as 87 degrees below zero Fahrenheit.

This permits the testing of flight instruments and the reactions of men who use them under atmospheric and temperature conditions virtually identical with those met 8 miles up.

Testing the *combination* of man and instrument in this laboratory will result in better protection for the lives of our military and naval flyers, and makes possible improved instrument design and more efficient operation.

Experienced engineers and a medical staff, trained in the technique of the physiology of high-altitude flying developed by the Mayo Clinic and the Medical Departments of the Armed Forces, direct the Sperry laboratory. This laboratory serves other war manufacturers as well as our Armed Forces.

It is Sperry's hope that the tests and studies of man and his instruments in this laboratory will make possible the development of the perfect man-instrument team that will function in complete harmony in the frigid blue of the stratosphere.

Sperry Gyroscope Company INC.

BROOKLYN, NEW YORK DIVISION OF THE SPERRY CORPORATION

GYROSCOPICS • ELECTRONICS • AUTOMATIC COMPUTATION • SERVO-MECHANISMS

Three reasons to PRESSURIZE CABINS FOR LOW-ALTITUDE FLYING!

5. What do you dislike about flying ?

Can't stand the "ups and downs"
I always feel dizzy
Makes my ears ache

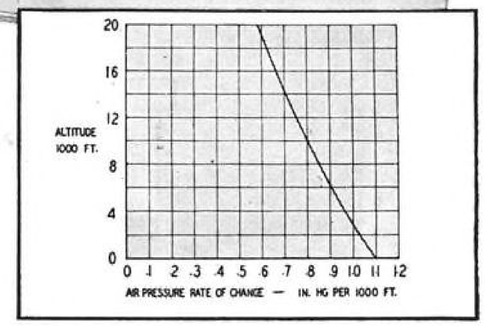

A RECENT SURVEY reveals the most common passenger objections to air travel are the *discomforts caused by changing air pressures.* And as chart here shows, pressure changes are most severe at the comparatively low altitudes through which most airlines operate . . . and are greatest during the airliner's climb and descent.

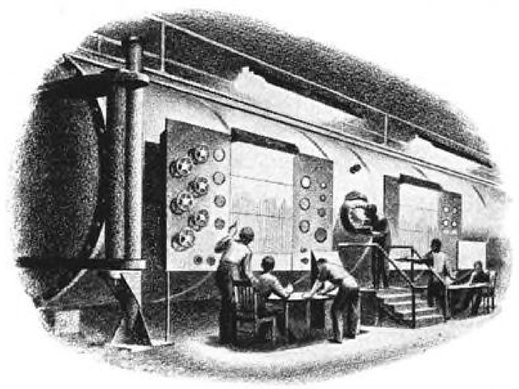

IN OUR "STRATOLAB," AiResearch engineers have been perfecting controls to *hold pressure constant* during climbs and descents . . . to *adjust pressure* gradually during airliner flight from low to higher altitude airports.

AiResearch Cabin Pressure Regulating Systems will be able to hold *sea level* altitude inside airliners flying as high as 20,000 feet!

From this AiResearch engineering will come pressurized cabins for postwar airliners—"living room" comfort for passengers at all times . . . and increased travel business for the airlines.

Information is available now to U. S. aircraft manufacturers and airline operators.

AiResearch MANUFACTURING COMPANY

LOS ANGELES • PHOENIX

DIVISION OF THE GARRETT CORPORATION

"Where Controlled Air Does the Job" • Automatic Exit Flap Control Systems • Engine Oil Cooling Systems • Engine Air Intercooling Systems • Exhaust Heat Exchangers • Supercharger Aftercooling Systems • Engine Coolant Systems

CHERRY BLIND RIVETS GIVE YOU GENEROUS TOLERANCES IN GRIP LENGTH

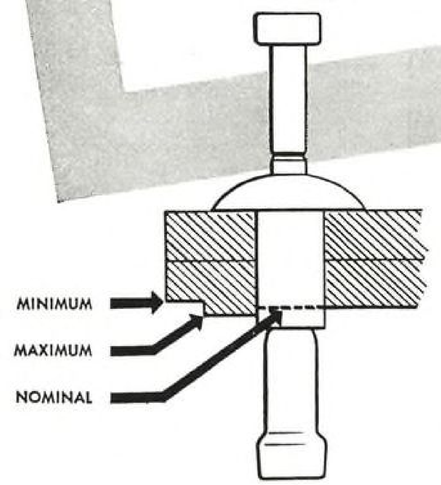

Material thickness isn't critical with Cherry Rivets. The grip length can vary up to a sixteenth of an inch and still hold perfectly. Cherry Rivets offer unusually broad tolerance in hole size, too. You have a latitude in working with Cherrys which is exceptional for blind rivets. You get good results under a wide variety of conditions—not only for blind riveting but anywhere you want a strong, firm, neat joint.

Cherry Rivets meet the requirements of the materials—metals, plastics, soft, pliable or brittle materials.

This diagram shows materials of different thicknesses joined with Cherry Rivets of the same length and all are held with perfect satisfaction.



Get this manual. It shows how easy Cherry Rivets work. Here's a book which everyone who uses blind rivets should have for handy reference. It may furnish the right answers to many tough production problems. Please specify Manual B-44.

CHERRY RIVETS, THEIR MANUFACTURE AND APPLICATION ARE COVERED BY U.S. PATENTS ISSUED AND PENDING

Cherry Rivet Company
LOS ANGELES, CALIFORNIA

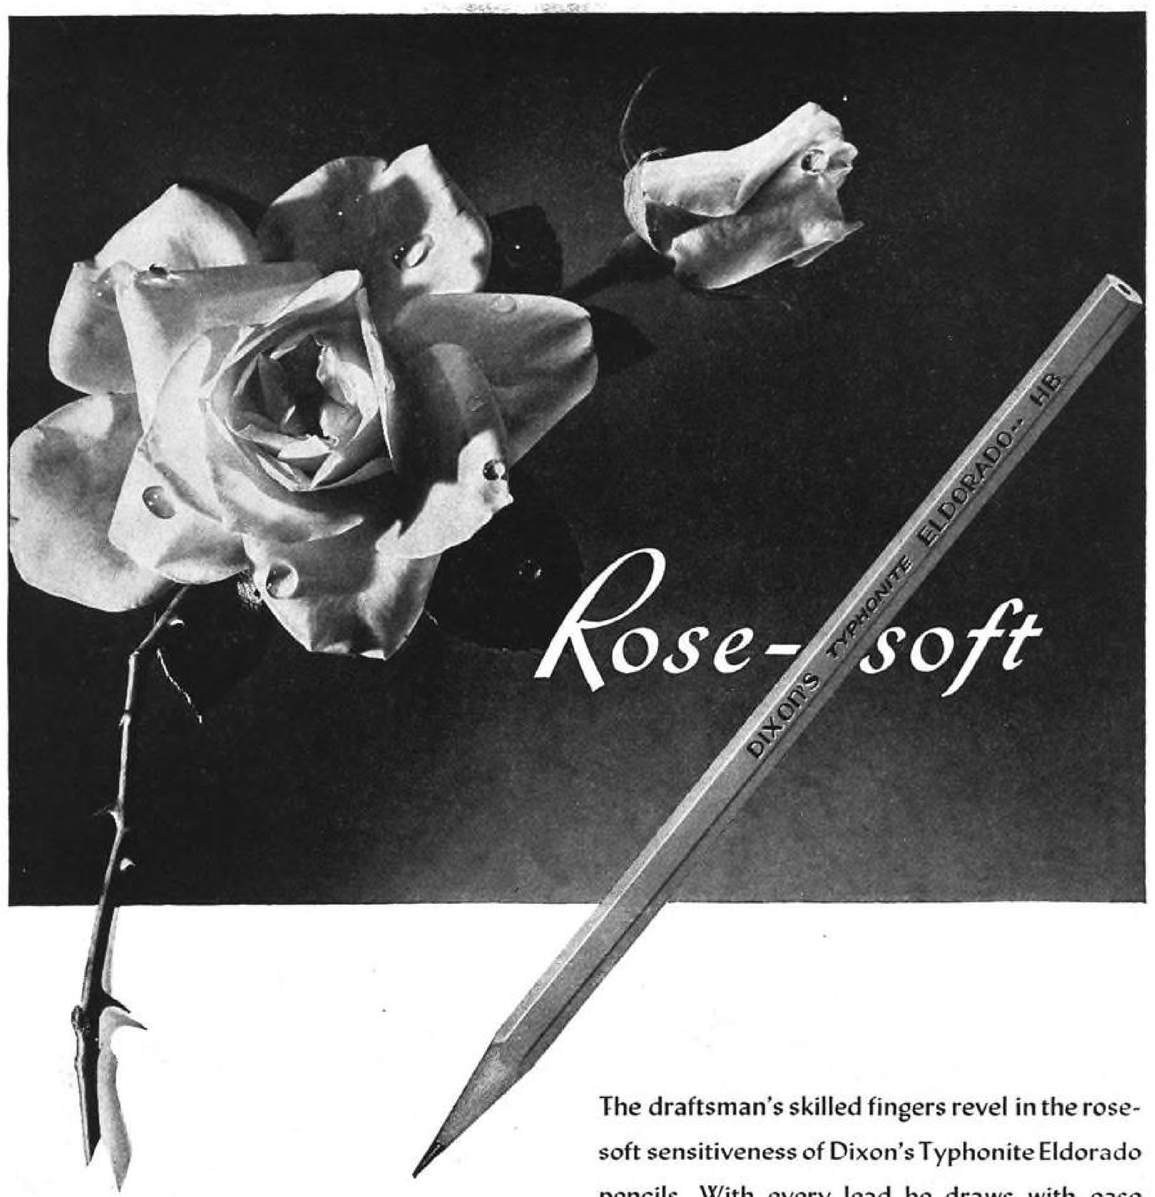

Write for Your Complimentary Copy

***"I Shall Arise"**—a portfolio of Typhonite Eldorado pencil reproductions by Samuel Chamberlain. Subjects are buildings of art and historical importance bombed by the Luftwaffe.*

The draftsman's skilled fingers revel in the rose-soft sensitiveness of Dixon's Typhonite Eldorado pencils. With every lead he draws with ease and sureness. No pencil distraction mars his satisfaction while he works with them, for Eldorado is the draftsman's drawing pencil.

TYPHONITE
ELDORADO

PENCIL SALES DEPARTMENT 61-J5, JOSEPH DIXON CRUCIBLE COMPANY, JERSEY CITY 3, N.J.

TOMORROW'S STRIKING FORCE

Will use

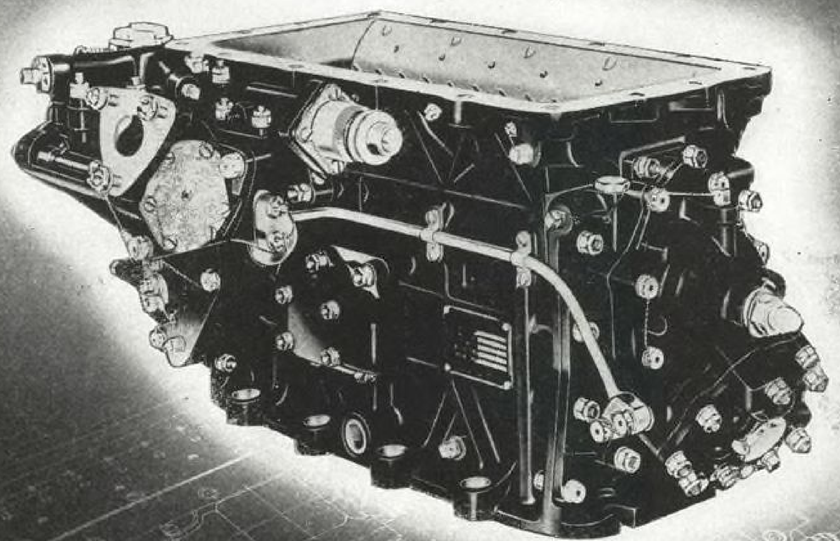

Chandler-Evans 58 CPB-4

CARBURETORS

CHANDLER-EVANS CORPORATION • SOUTH MERIDEN, CONNECTICUT, U. S. A.

CECO

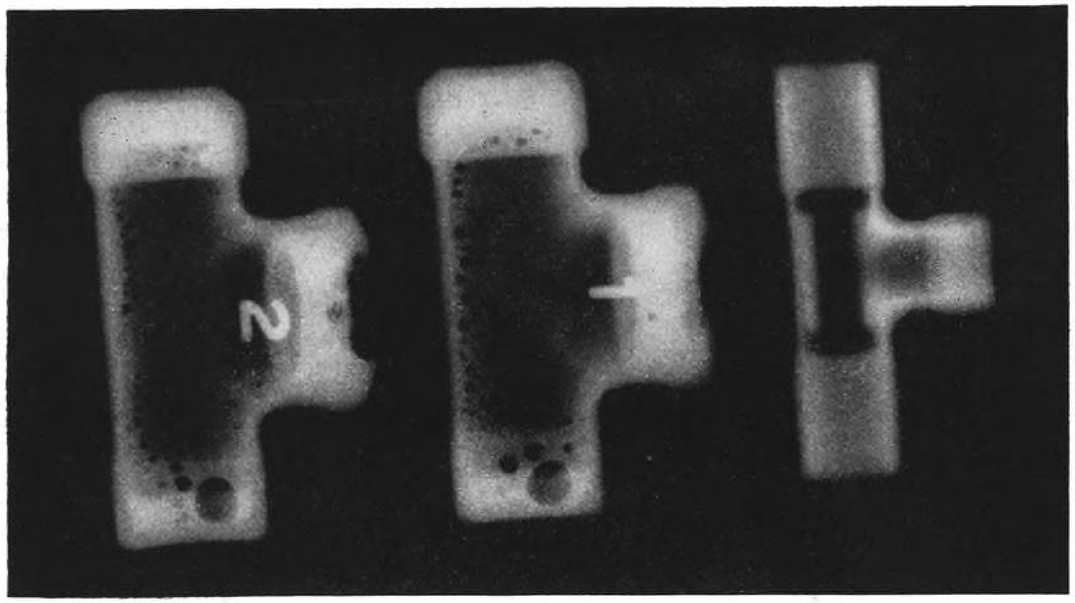

Supermix

GIVES YOU MORE FOR LESS

That's the concensus of hundreds of x-ray technicians who in the past three years have changed over from conventional powdered film-processing chemicals. They'll tell you Supermix not only improves efficiency and gives better end-results, but also lowers film-processing cost.

MORE SPEED. With Supermix you nearly double film output, and are able to give quicker service. Only 3 minutes to develop and 1 minute to clear.

HIGHER QUALITY. Your films will be diagnostically better too. Supermix is unsurpassed for bringing out contrast, density, and fine structural details.

LESS WORK. Long-lived Supermix solutions need changing less often. New solutions are quickly mixed simply by pouring concentrates into tanks and adding water—with no time lost adjusting temperature. And you eliminate darkroom bookkeeping by using Supermix Refresher, it keeps developing time constant.

LOWER COST. Because of longevity, the use of Supermix solutions represents a 15% saving over conventional powders. And Supermix Developer, revitalized periodically with Supermix Refresher, lasts up to 4 times longer, a further saving.

ORDER TODAY FROM YOUR NEARBY G-E BRANCH OFFICE

	Developer	Refresher	Fixer
To make 1 gal.	$1.00	$1.15	$1.00
To make 3 gals.	2.75	....	2.70
To make 5 gals.	4.50	5.25	4.25

Prices f. o. b. U. S. Branches. Prices will be increased by the amount of such sales (or use) tax as may be applicable.

GENERAL ELECTRIC X-RAY CORPORATION

2012 JACKSON BLVD. CHICAGO (12), ILL., U. S. A.

Today's Best Buy – U. S. War Bonds

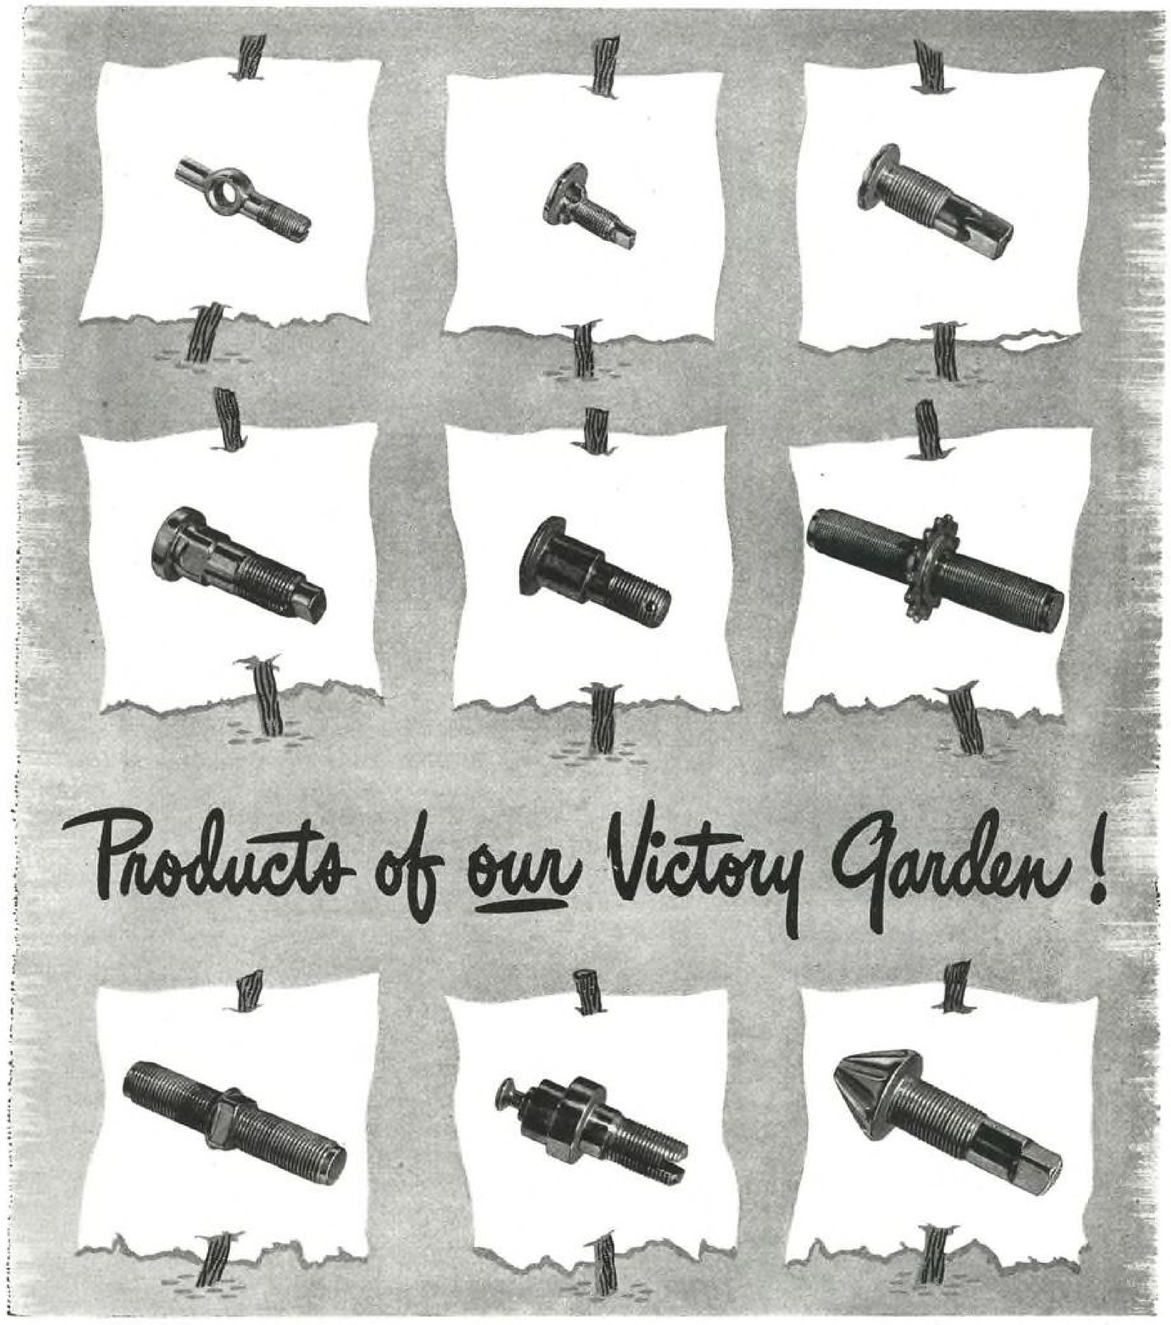

Cold forgings—just a few of the unusual shapes and sizes from the "good, rich earth" of Allied craftsmanship! Only years of careful cultivation of precision machinery and workmanship could make them possible.

Produced in one piece, from a coil of steel wire, Allied cold forgings are taking part in America's march to victory—in tanks, tractors, amphibians, jeeps, airplanes and other equipment of war. If you are producing materiel for victory, the unusual strength, flexibility of design, and precise dimensions of these and other parts which are produced in volume by Allied Products Corporation may solve some of your production problems.

• • •

"IT'S AN ALLIED PRODUCT!"... Allied Products Corporation and its divisions, Richard Brothers and Victor-Peninsular, in Detroit and Hillsdale, Michigan, also make: The original, patented R-B Interchangeable Punch and Die; sheet metal dies; plastic molds; jigs and fixtures; precision hardened and ground parts; and other special products.

ALLIED PRODUCTS CORPORATION

Executive Offices: 4646 Lawton Ave. Detroit 8, Mich.

All four plants have now added a star to their Army-Navy "E" pennants

"Grow More In '44"

—that's the motto for America's victory gardeners this year. The food situation continues urgent, and the government calls for 22 million victory gardens. Let's all pitch in and help grow our own food. NOW is the time to PLAN a prize victory garden!

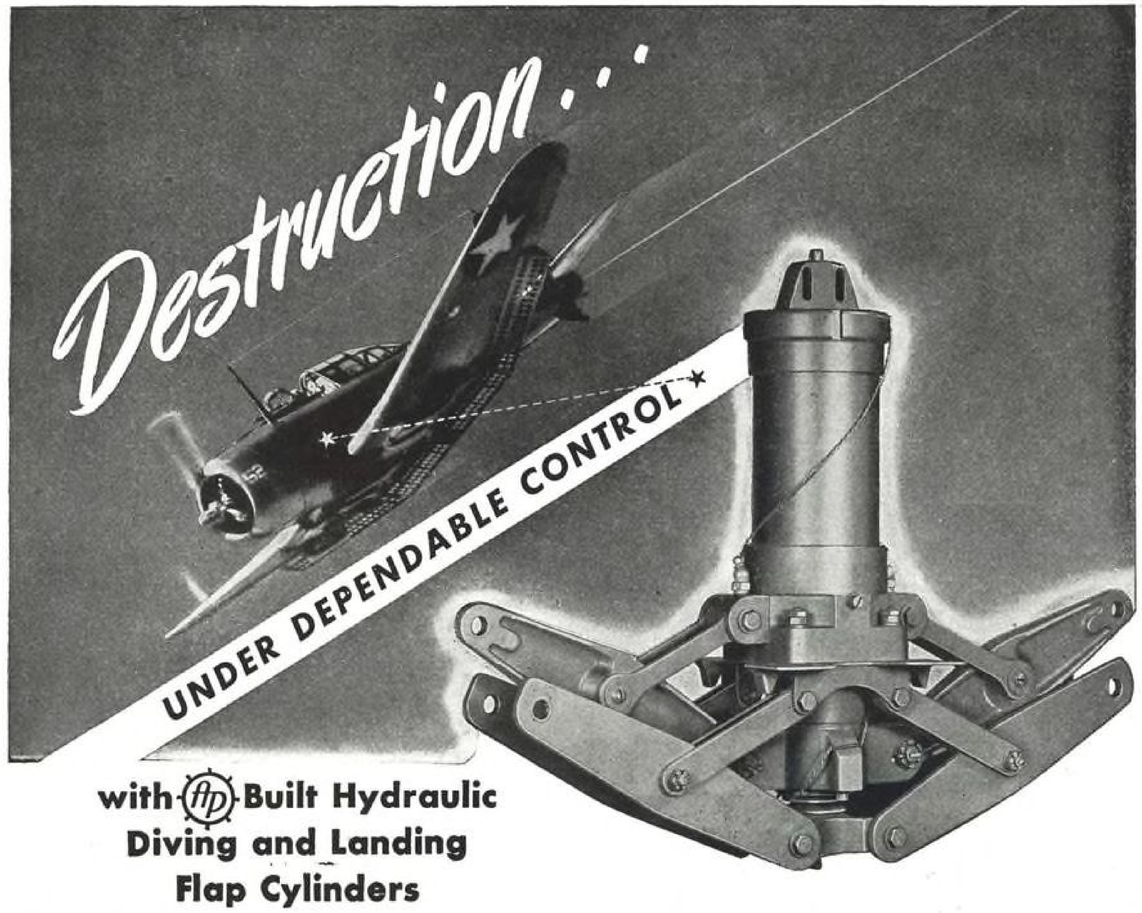

with A-P Built Hydraulic Diving and Landing Flap Cylinders

Beneath the pilot seat of Douglas dive bombers — you'll find a complicated cylinder assembly that has a big responsibility. It's the A-P built hydraulic landing and diving flap cylinder, ingeniously designed to split-second operation of both landing and diving flaps to pull the bomber out of its screaming dive, or for more accurate landing.

Typical of A-P precision production methods on aircraft controls, this sturdy cylinder is built for great strength, and to extreme tolerances. Tested at pressures of 4000 p.s.i. — twice the pressure required on the bomber's 2000 pound hydraulic system — it has met every requirement of the army air forces.

This is only ONE of many specialized A-P Aircraft Controls now in service on all types of planes, in all theatres of war — hydraulic, gasoline, oil and liquid controls built to a single high standard of accuracy and efficiency.

Check the coupon NOW for your copy of this NEW A-P AIRCRAFT CONTROL CATALOG.

AIRCRAFT DIVISION
AUTOMATIC PRODUCTS COMPANY
2484 North Thirty-Second Street
Milwaukee 10, Wisconsin
Please send me the Catalog on A-P Aircraft Controls
Firm.....
Address.....
City.....State.....
Attention of.....

HYDRAULIC *Aircraft* CONTROLS

AIRCRAFT DIVISION
AUTOMATIC PRODUCTS COMPANY
2484 North Thirty-Second Street • Milwaukee 10, Wisconsin

"And Aunt Martha says to tell you she feels ever so much better, knowing that Sloane made the wings."

It's intricate business...constructing glider wings. Completely different from the building of fine furniture that Sloane was doing when orders came through to change over to war production.

But the years in top-flight woodworking that Sloane Master Craftsmen had behind them proved good grounding. This, coupled with Sloane's typical mastery of new technical problems, enabled us to set a record both in production and cost, while our standards kept to the same high level as always.

New questions are coming up in the expanding aviation industry. We believe our experience fits us to do the job you want. Sloane facilities are yours for the asking. We'd like to sit down and talk over your problems with you.

W & J · SLOANE

Contract Division

575 FIFTH AVENUE · NEW YORK

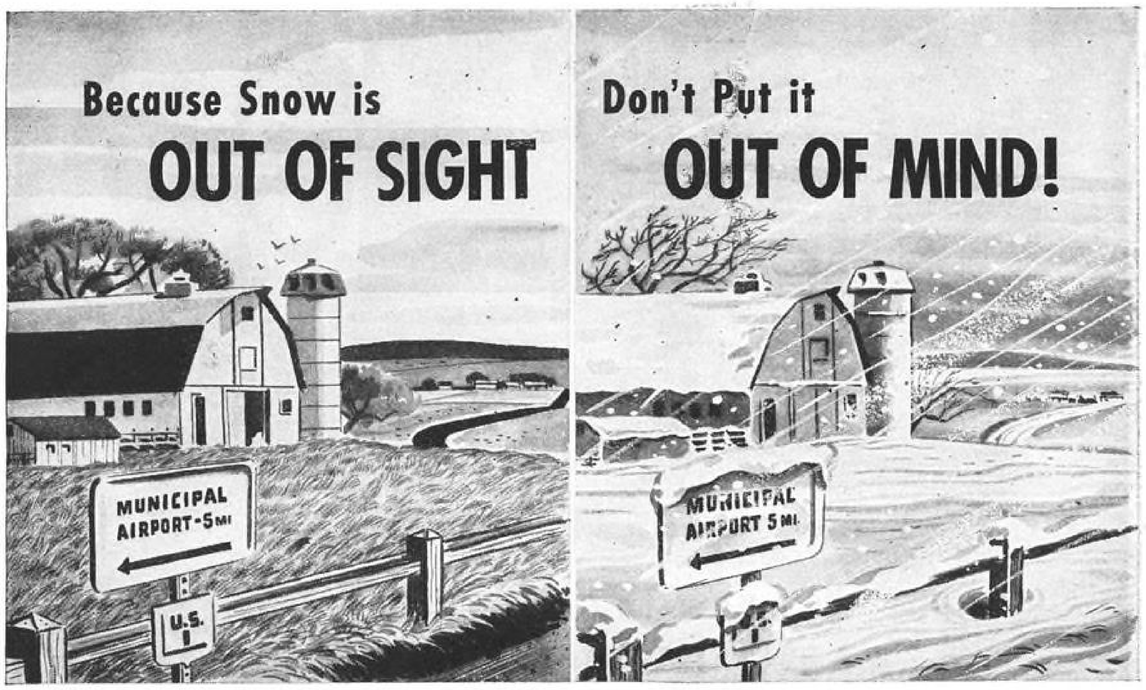

NOW is the time to Select Equipment for Next Winter's Snow Removal

Experienced airport maintenance men know that you can't put snow removal into a neat package in early Spring and label it "Do not open until Fall"!

They know that many phases of snow removal are best planned in the off-season, when the past winter's experience can be studied—operating techniques re-examined—equipment checked. Above all, they realize that specialized snow removal equipment —vital to winter airport operation—must be evaluated, ordered and produced *months before the first snow falls.*

It's easy (and often too late) to recognize the dangers of crack-ups and lost flying time when snow is piled high on your runways. But it's a lot safer to take steps NOW to insure readiness for the severest conditions next winter.

Important Advantages of
WALTER 250 H. P. SNOW FIGHTER

- Clears a 28 ft. width in one run—at 20-30 miles per hour.
- Throws snow far to the side, preventing the formation of dangerous snow banks.
- Does not waste power in slipping, stalling or wheel-spinning, because the exclusive Walter 4-Point Positive Drive delivers power to each of FOUR driving wheels according to its traction at any instant.
- Keeps airport runways clear throughout the worst blizzard—has them ready for action the instant visibility clears.

WRITE TODAY for detailed airport literature.

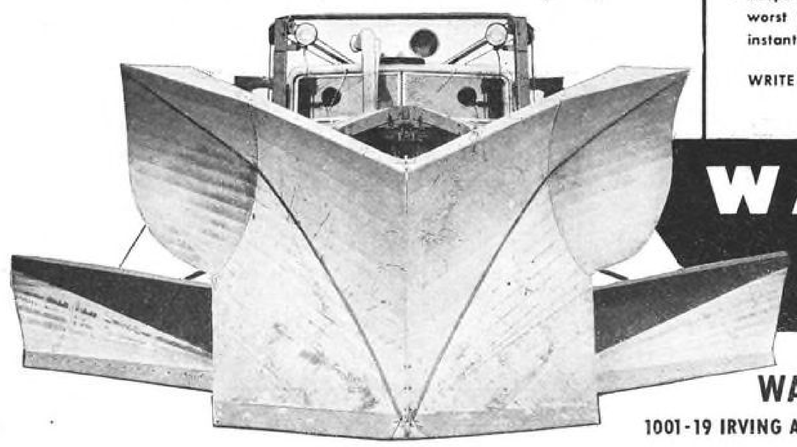

WALTER
SNOW FIGHTERS

WALTER MOTOR TRUCK CO.
1001-19 IRVING AVE., RIDGEWOOD 27, QUEENS, L. I., N. Y.

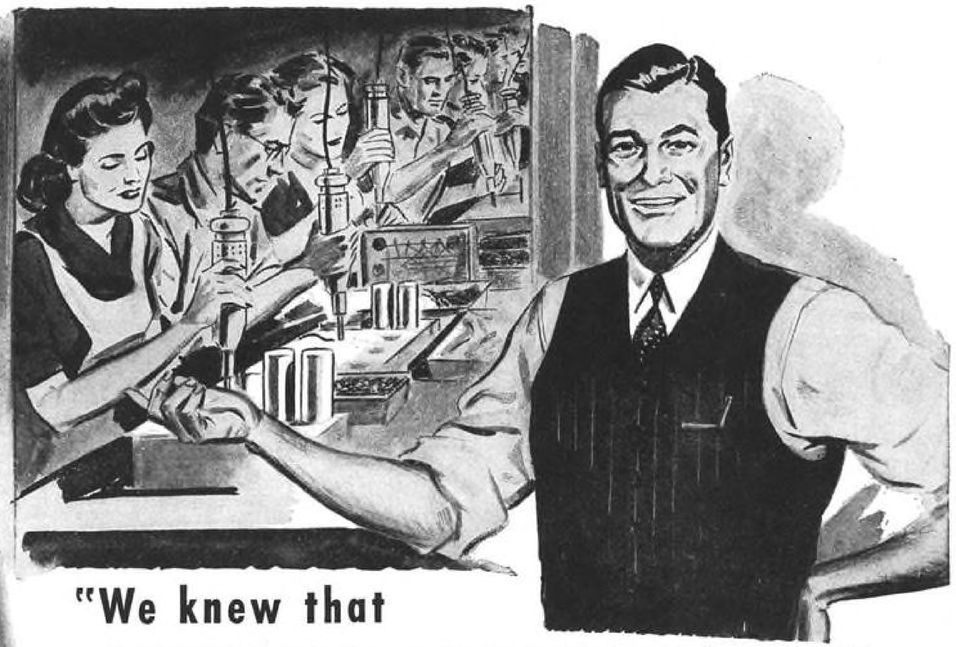

"We knew that

AMERICAN PHILLIPS SCREWS

Make Stronger Fastenings Faster...

Now we know, too, that they Cost Less to Use!"

Anyone can see that American Phillips Screws are the fastest and easiest means of assembly, as well as the most effective protection against spoiled work. And those who scan the cost-sheets can see, too . . . how quickly American Phillips Screws write off their own investment and build a healthy margin over on the credit side.

These savings come both from Phillips engineered design of tapered recess and driver . . . and from American production-control which consistently delivers screws of uniform quality and size, individually inspected for accuracy and serviceability of head, thread, and point. So "buy American," and get these savings for yourself.

AMERICAN SCREW COMPANY
PROVIDENCE 1, RHODE ISLAND
Chicago 11: 589 E. Illinois Street *Detroit 2:* 502 Stephenson Building

ONLY PHILLIPS SCREWS HAVE THE ENGINEERED, TAPERED RECESS

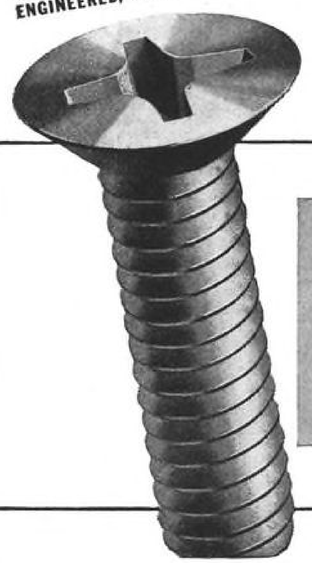

...and here's WHY American Phillips Screws COST LESS on any Screw Driving job

1. **Faster Starting**—One hand holds driver, other holds work. No wobbling, no dropped screws. Phillips screw and driver remain as one self-aligned unit until screw is driven.



2. **Cleaner Fastenings,**—*every time.* No slanted screws to back out. No gouged work-surfaces, or burred screw-heads. Even unskilled workers get skilled results right from the start.

Put the Screws on the Axis... BUY WAR BONDS!

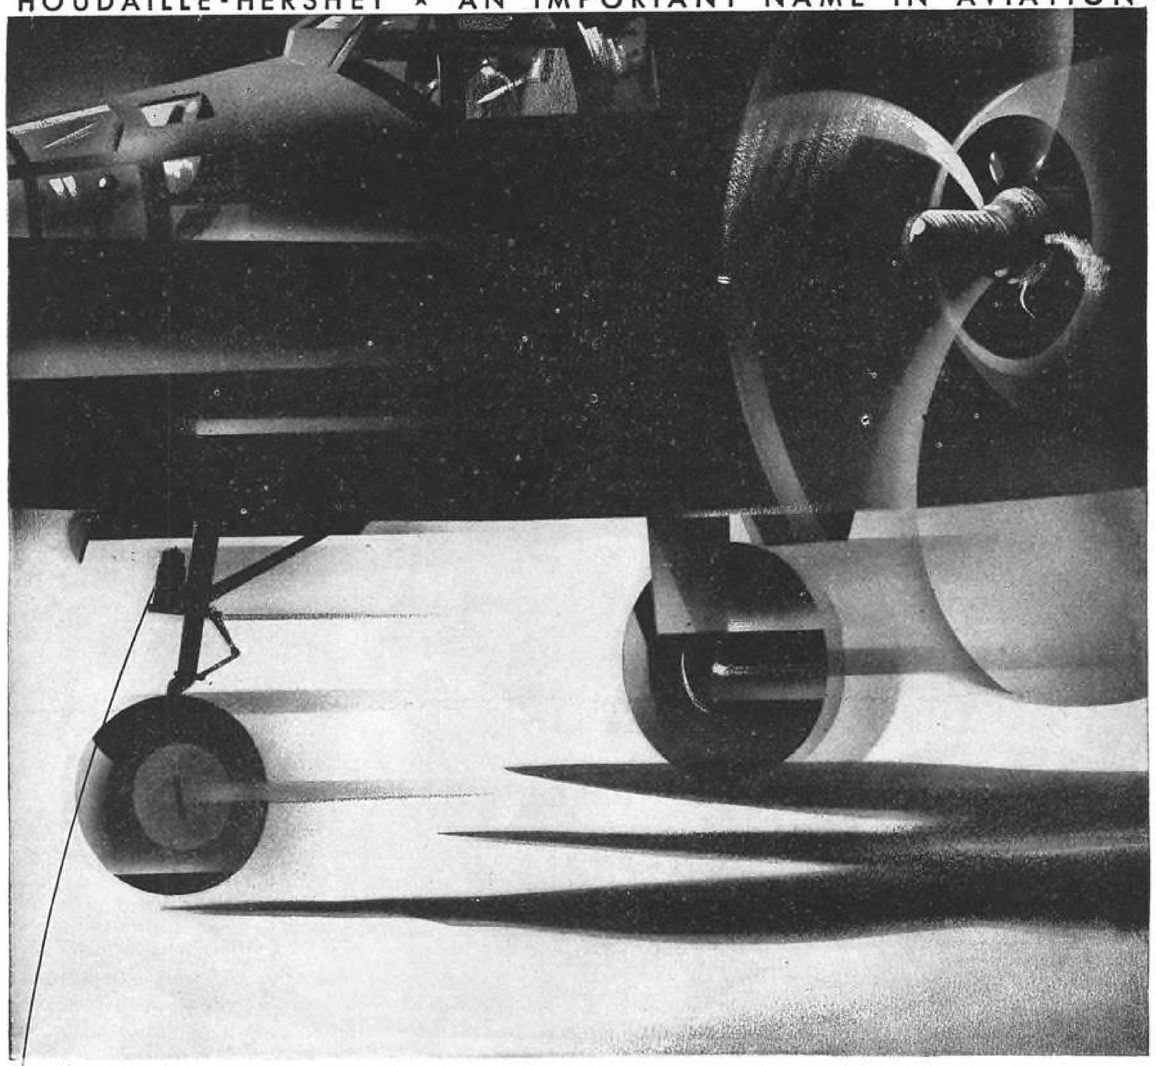

A little giant for a BIG job

● To control dangerous shimmying forces on the nose wheels of fighters and bombers, the tail wheels of huge cargo planes, is the job of the Houdaille* Hydraulic Shimmy Damper. It is a relatively small, compact precision instrument, but it tames forces of great magnitude—a little giant for a BIG job, in fact.

HOUDAILLE-HERSHEY CORPORATION
GENERAL EXECUTIVE OFFICES: DETROIT

● The Hydraulic Shimmy Damper is only *one* of the products which Houdaille-Hershey is producing *in quantity* for the aviation industry.

* Pronounced "Hoo-dye"

MANUFACTURERS OF PRECISION PARTS AND EQUIPMENT FOR THE AUTOMOTIVE . . . AIRCRAFT . . . RAILWAY . . . MARITIME . . . ELECTRIC REFRIGERATION . . . RADIO AND OTHER INDUSTRIES

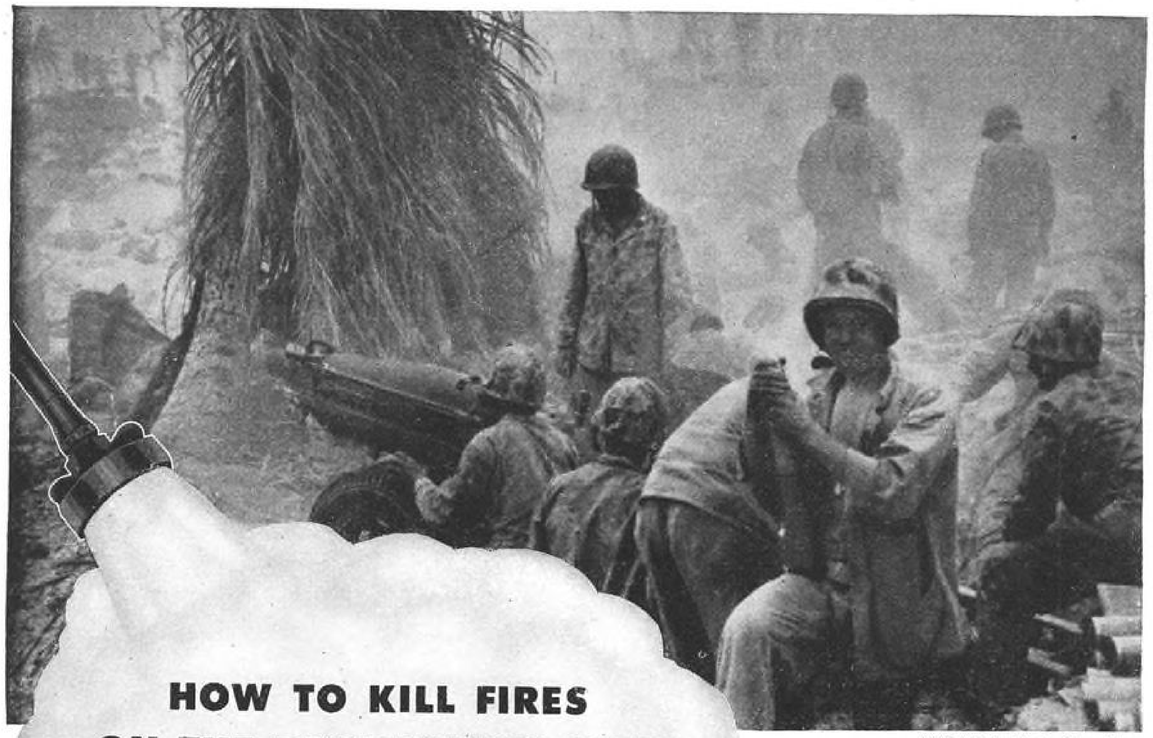

Official U. S. Marine Corps Photo

HOW TO KILL FIRES ON THE PRODUCTION LINE

To Save Lives On The Firing Line

Failure of a war plant to make on-time delivery of any part of the fighting tools needed in a critical engagement may cost lives—even lose battles.

It is no coincidence that when hazards are toughest to handle in many of the most vital war industries . . . where fire or damage by water or other extinguishing medium would disrupt carefully planned production schedules . . . protection is provided by Cardox Fire Extinguishing Systems engineered for the specific hazards they cover.

HOW CARDOX SYSTEMS PERFORM

At the first flash of fire a Cardox System—actuated manually or automatically—goes into operation.

An alarm sounds, giving personnel notice to leave the fire zone.

Next, a timed *mass* discharge of Cardox CO_2—stored at 0° F. in a mechanically refrigerated storage unit and applied at high rate—in *pounds* or *tons*—quickly reduces oxygen content of the atmosphere below combustion requirements. This Cardox discharge, with its characteristic high CO_2 snow yield, swiftly cools out fire and fire zone.

Since Cardox CO_2 is a non-damaging, non-contaminating inert gas, there is no damage or production delay caused by the extinguishing medium.

Why CARDOX Systems Provide Enhanced CO_2 Performance

Extinguishment of this kind is possible with Cardox Systems because: (1) Cardox CO_2 has uniform extinguishing characteristics regardless of plant or atmospheric temperatures. It can be controlled and given engineered application in accordance with the requirements of each specific hazard covered; (2) High CO_2 snow yield provides increased cooling effect (carbon dioxide released at 0°F. yields 45% CO_2 snow); (3) Effective projection through relatively great distance is achieved—even outdoors.

CARDOX Advantages Applicable To Large or Small Systems

These fire extinguishing advantages can be provided in small or large Cardox Systems, whether engineered for one or a number of hazards.

If your company is engaged in any phase of the war program, or if you want detailed information of fire protection that will prevent dangerous delays in getting your post-war plans in high gear, write on company letterhead for Bulletin 354.

CARDOX CORPORATION
BELL BUILDING • CHICAGO 1, ILLINOIS

District Offices in New York • Boston • Washington
Detroit • Cleveland • Atlanta • Pittsburgh
San Francisco • Los Angeles • Seattle

MASS DISCHARGE OF CO_2 · ENHANCED COOLING EFFECT · CENTRAL STORAGE UNIT · AMPLE CO_2 RESERVE · ENGINEERED SYSTEMS · MANUAL OR AUTOMATIC CONTROL

CARDOX

NON-DAMAGING FIRE EXTINGUISHING SYSTEMS

FACTS-IN-FIGURES

"Piece Out the Picture"

. . when there are *Veeder-Root Counting Devices* on *all* your Production Machines

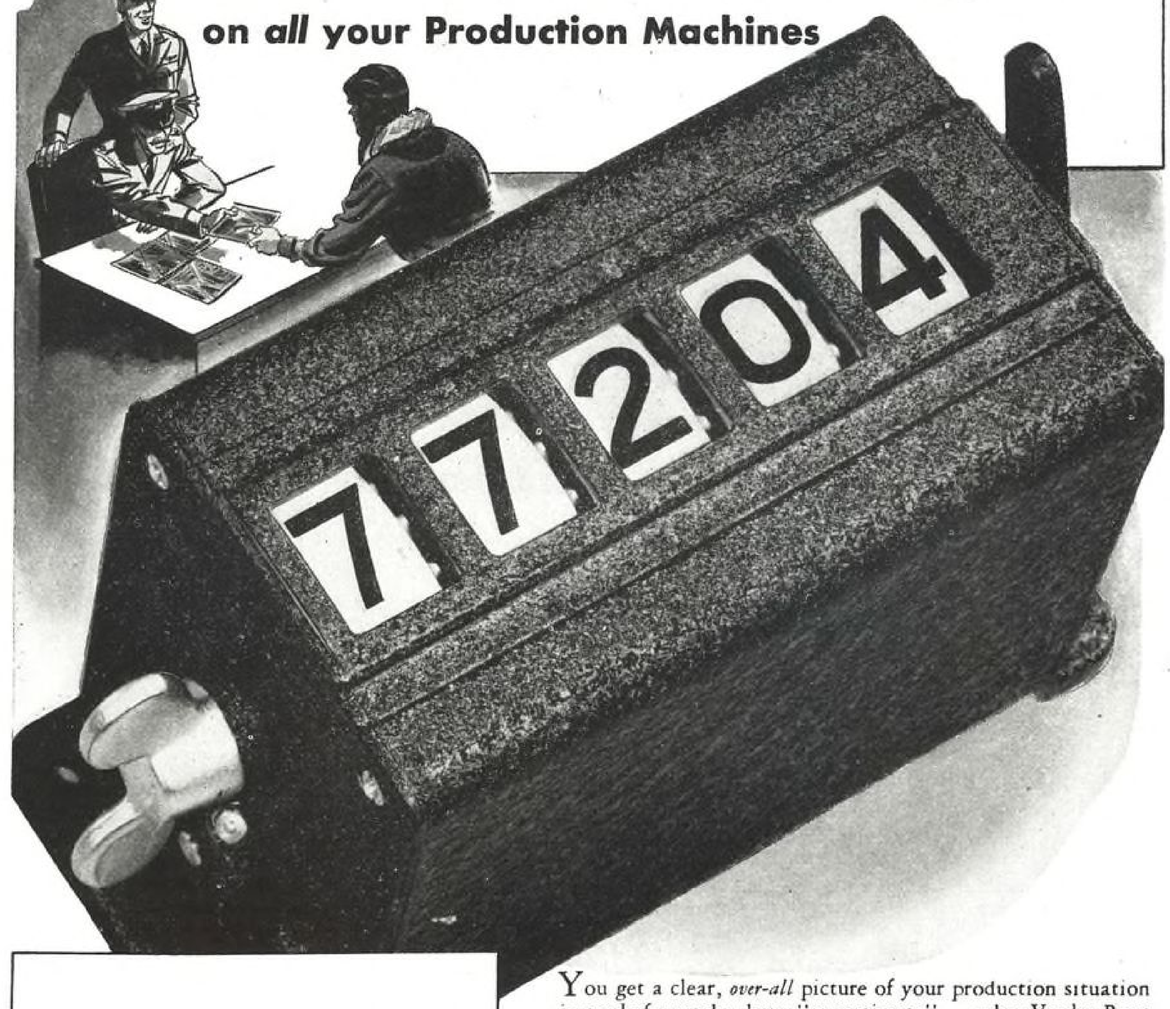

The Counting House of Industry

77204

VEEDER-ROOT
INCORPORATED
Hartford 2, Connecticut

In Canada: Veeder-Root of Canada, Ltd., Montreal.
In England: Veeder-Root Ltd. (new address on request).

You get a clear, *over-all* picture of your production situation . . . instead of a patchy, hazy "guesstimate". . . when Veeder-Root Devices are reporting right up to the minute on the performance of all the machines in your plant. Then you can hit your finished-production targets right on the nose . . . with no fear of assembly being tied up and deliveries delayed by shortages of parts caused by laggard machines.

There are Veeder-Root Devices for mechanical and electrical operation . . . quick and easy to install . . . to keep you supplied with operating facts-in-figures that will warn you when any machine drops below rated capacity, so that adjustments may be made before trouble gets a foothold. Let Veeder-Root engineers show you how Veeder-Root Devices can help you make your work count for more. Write.

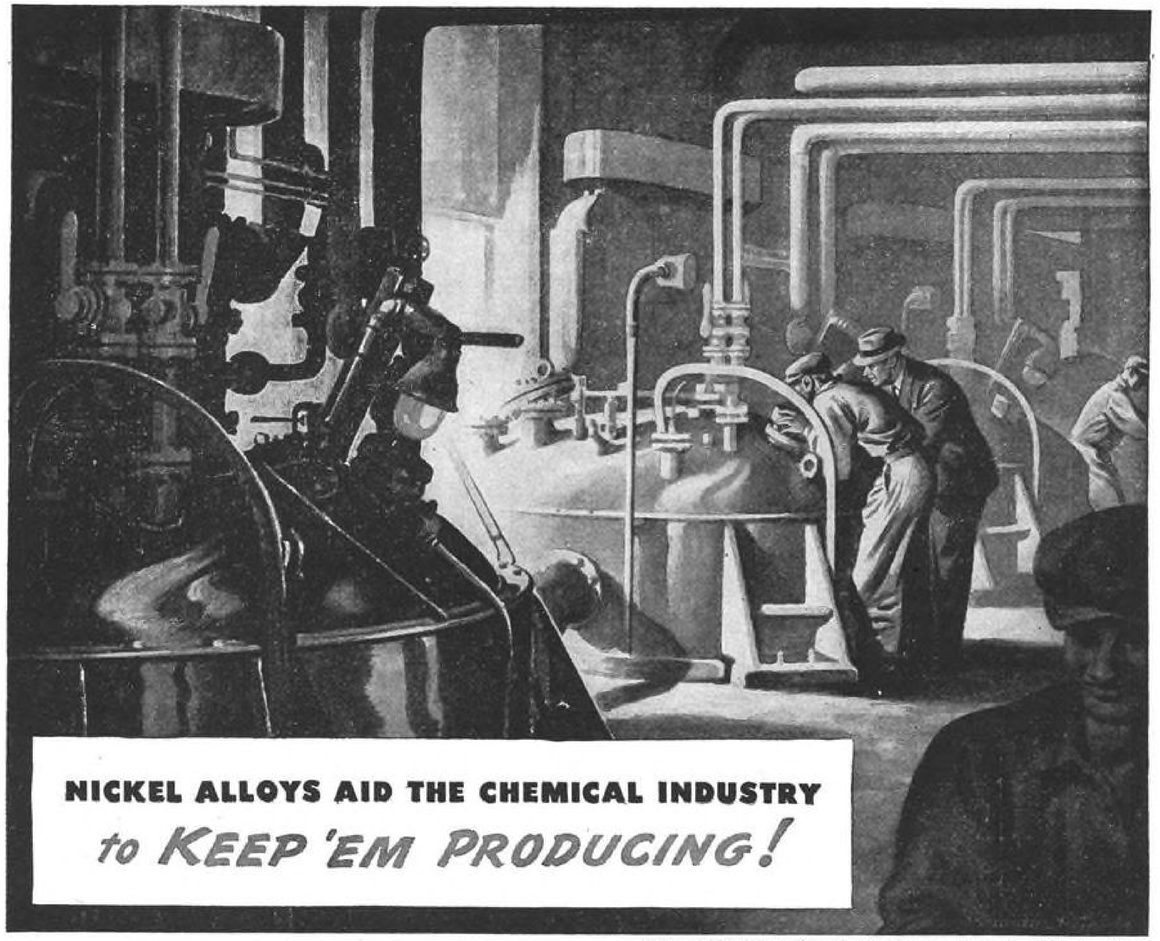

Stainless Steel Lined Polymerization Reactors in Synthetic Rubber Plant

Equipment of Stainless Steel, Nickel and Monel meets many specialized requirements

Chemical engineers have met America's wartime challenge.

They opened the gates to a mighty flood of products going to war...strategic raw materials, synthetic substitutes, and entirely new substances having advantages all their own.

A factor in this production success is the wide use of stainless steel, Monel, and other corrosion-resistant alloys containing Nickel.

For in the chemical industry corrosion is a large-scale menace.

To wage war on this enemy, chemical engineers enlisted the aid of Nickel, because Nickel imparts to other metals strength and resistance to corrosion and wear. In the chemical field, as in many others, a little Nickel goes a long way to keep equipment producing.

It prolongs the life of processing apparatus, and protects the purity, color, and uniformity of the product.

Hence, stainless and Nickel alloys are specified widely for acid heaters and caustic coolers, for high-pressure autoclaves and vacuum evaporators, for cracking towers and polymerization reactors, for shipping drums and tank cars, for pumps, piping and storage tanks, for agitators and settlers, for stills and digestors—for every type of equipment that converts laboratory experiments into full-scale chemical operations.

For years we have enjoyed the privilege of cooperating with technical men of the chemical industry...and of many others. Whatever your industry may be ... if you want help in the selection, fabrication, and heat treatment of alloys ... we offer you counsel and data.

New Catalog Index

New Catalog C makes it easy for you to get Nickel literature. It gives you capsule synopses of booklets and bulletins on a wide variety of subjects—from industrial applications to metallurgical data and working instructions. Why not send for your copy of Catalog C today?

* Nickel *

THE INTERNATIONAL NICKEL COMPANY, INC., *67 Wall St., New York 5, N. Y.*

FOR THE BEST DRESSED POST-WAR JOBS

REEVES ARMY TWILL

"FROM COTTON TO CUTTER"

America's leading air transport companies are typical customers for Reeves Army Twill. Whatever the industry, if uniforms are needed, this top-quality fabric tailors smartly and gives superb service. Over 80 million yards of it have already been used to help equip America's fighting men, and it is proving itself under the toughest climatic and combat conditions of global war. This fabric, Sanforized Shrunk* and color-fast to sun, water and perspiration, will meet *your* post-war uniform needs. When the time comes to order them, choose from a wide range of popular colors — insist on getting Reeves Army Twill.

**Residual shrinkage less than 1%*

Mills Mill, Greenville, S. C. and Woodruff, S. C.
Fairforest Finishing Co., Spartanburg, S. C.

THE REEVES FABRIC GROUP INCLUDES: *Reeves Army Twill • Glengarrie Poplin • Reeveking Gabardine • Byrd Cloth • Marine Herringbone • Reeves Sateen • Warrior Twill*

SPINNING WEAVING DYEING FINISHING Reeves FABRIC

REEVES BROTHERS, INC.

54 WORTH STREET • NEW YORK 13, N. Y.

Representatives in Atlanta • Boston • Chicago • Dallas • Los Angeles • Philadelphia • St. Louis • Montreal • Toronto

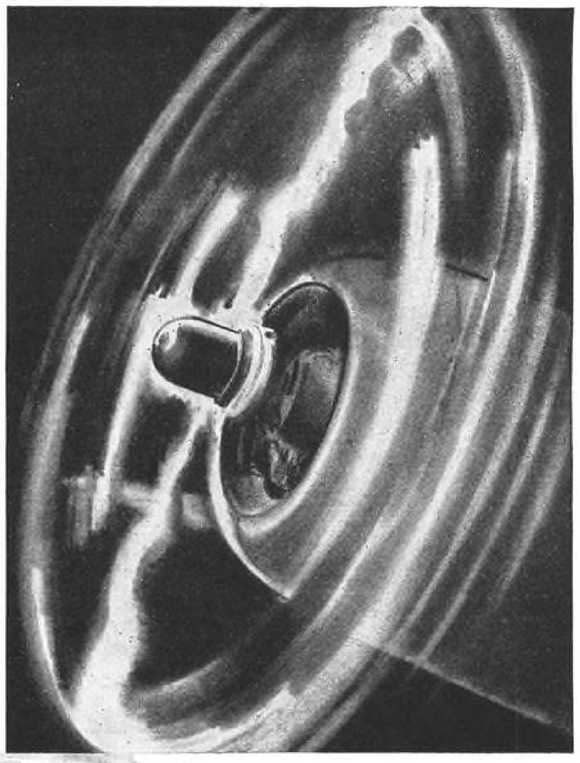

Putting Teeth in a 70-Ton Bite

TAKE SIX TONS of fighting fury—wrap it around 2,000 horsepower—pull it seven miles up, at more than 400 m.p.h.—that's just a rough idea of the work a propeller does on a Thunderbolt or similar stratosphere fighter. There can be no margin for error in manufacturing these "props" . . . *Life and Victory ride on their performance.*

Successfully producing non-ferrous metal and steel "prop" blades to withstand a 70-ton pull at high speeds means intensively double-checking for fatigue stresses which "pop" up occasionally and eliminating this threat of failure before it actually happens in combat.

A McAleer *tailored-to-the-job* greaseless type composition and finishing method helped solve the problem. Not only were the occasionally microscopic fatigue stresses revealed, but the unbelievably smooth finish obtained, made it possible to feather the "prop" blades with practically no coefficient of air friction at high speeds.

McAleer Finishing Engineers were ready for this assignment. Long before the urgency of national peril, McAleer was busy helping aircraft engine manufacturers obtain a similar type finish on operating parts of the power plants that actually drive these propellers.

Pass YOUR hard-to-solve finishing production problems on to McAleer. Our broad experience in production finishing procedure and product improvement through finishing, can help you materially in meeting your war production finishing contracts.

Be the material, metal, plastic or wood—if the job can be finished better, faster, more economically, McAleer "know-how" will find the way.

McAleer MANUFACTURING CO.

Manufacturers of Quality-Controlled Finishing Materials, Military Aircraft Sub-assemblies and Pyrotechnics . . .

ROCHESTER, MICHIGAN

OHMITE Rheostats and Resistors

Veterans of Service in Every Type of Aircraft

- FIGHTERS
- BOMBERS
- TRAINERS
- TRANSPORTS

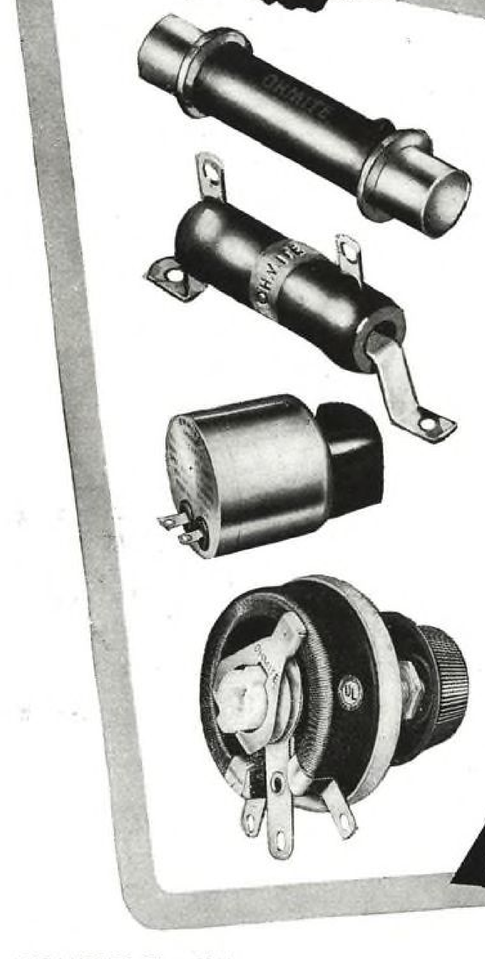

Among the first to serve in the electrical systems of aircraft . . . Ohmite Rheostats and Resistors have been "in the fight" on every front . . . from the beginning.

Today, aircraft engineers *know* these units can be relied on to function under extremes of temperature, humidity and altitude conditions. Ohmite experience makes a difference.

Approved types for Army and Navy Aircraft.

OHMITE MANUFACTURING COMPANY
4946 FLOURNOY STREET, CHICAGO 44, ILLINOIS

Your Answer Book on Resistance Problems

Write on company letterhead for Industrial Catalog and Engineering Manual No. 40. Gives helpful information on the selection and application of rheostats, resistors, tap switches, chokes and attenuators.

Be Right with OHMITE
RHEOSTATS • RESISTORS • TAP SWITCHES

— and the menace of SAND

In our African Campaign the R.A.F. and mechanised units of the Army have had this extra enemy to fight and conquer — SAND.

Our desert troops know what a frost is

By ARCHER BROOKS

IF your sweetheart, in a burst of romantic fervour, swears that he (or she) will love you "till the sands of the desert grow cold" you'd better check up on that.

No doubt the declaration will be made in all sincerity, based on the popular belief that the desert sands are eternally hot.

But the truth is they do grow cold, very often. Devilishly cold, in fact, at this time of the year.

Ask any soldier just returned from the Libyan Desert and he'll tell you how cold and heavy night draws and make the sand; and that often there are sharp frosts that leave a rime for the frosts that leave a rime on the weak morning sun to disperse.

In the cold rainy season—from now on into the New Year—I have seen hailstones wing like a spreading of tapioca on the Libyan Desert.

Even a scattering of snow . . . (remember Omar Khayyam's "like snow upon the desert's dusty face")

NO, the desert's not always a land of searing sun and waterless waste. With the rains —which fall with torrential fury —filling the wadis (ravines) and leaving pools in the dunes and hollows. Then the cold winds sweep bitterly across the sandy plains. They bite through one's blankets at night and make the troops' pre-dawn and stand-to-arms a marrow-chilling affair. By the time the sun is considerably weaker at this time of the year. The rains remains about noon does it; only round appreciable warmth. After the rains patches of fine loose sand into great swirling clouds as dense as a London pea-soup fog. The khamsin rages day and night for approximately fifty days—khamsin is Arabic for spring up and bloom in the most unsuspected places—pop-pies, night-scented stock: and a tiny pinkish-white flower that here and there carpets the inch-high desert.

Flowers night for approximately fifty days—khamsin is Arabic for spring up and bloom in the most unsuspected places—pop-pies, night-scented stock: and a tiny pinkish-white flower that here and there carpets the inch-high desert.

NO matter what precautions are taken to shield it, food becomes impregnated with it. It piles like snowdrifts on tents until its weight snaps the tent-poles. A wounded man unable to move may quickly be buried by it.

The landscape changes. Little by little, great hills of sand are carried away by the wind and piled up elsewhere.

Sometimes a ledge of sand, held together by friction of the particles, will stay projected for several feet over a precipice, a dangerous trap for the unwary traveller.

Gradually, the long sand-storm period peters out. Follow months of blazing sunshine with seldom a wisp of cloud and not a breeze to temper it. By the time the khamsin, a hot, parching wind that gathers the fine loose sand into great swirling clouds as dense as a London pea-soup fog, day and night for approximately fifty days, has come to an end, the desert's life is like a poem of colour. Then sunrise and sunset are like a purple, the moon floods the sea with an eerie

It was on these snails, boiled, that the thirty-odd officers and men of H.M. armed boarding steamer Tara—shipwrecked on the Libyan coast in 1915—lived for four months before the Duke of Westminster's armoured cars, operating against the rebel Senussi.

Incidentally, this was the first mechanised forces had out. In the spring, when no trace of sunshine remains and the sun is a hot, parching desert burns one's feet and the rains remains and the rains remains growing stronger, comes a breeze with a wisp of desert rocks are hot enough to fry eggs.

Then sunrise and sunset are like a purple, the moon floods the sea with an eerie

Archer Brooks' intensely interesting article reprinted by courtesy of the author and the "Daily Mirror."

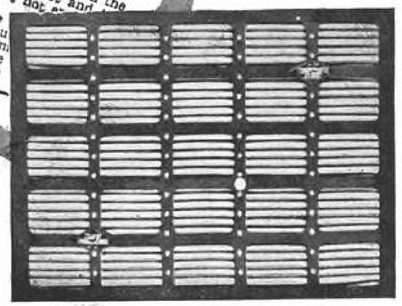

Appalling Conditions!
VOKES tackled this problem . . .

On the right is shown the actual filter element of a Vokes Air Filter for Aircraft. It traps dust particles down to 0.00004 in. dia., upholding the Vokes standard for their filters, 99.9% filtration efficiency.

VOKES

VOKES LIMITED · FILTRATION EXPERTS

THE ARTHUR S. LEITCH CO. LTD., 1123 BAY STREET, TORONTO, CANADA

E. CANTIN, 101 PARK AVE., NEW YORK

VOKES FILTERS we are proud to say, have helped to beat the enemy SAND. Special types of Vokes Air, Oil and Fuel Oil Filters were demanded, produced and did their job. In countries where sand is a menace to all machinery Vokes Filters prove invaluable in all industries.

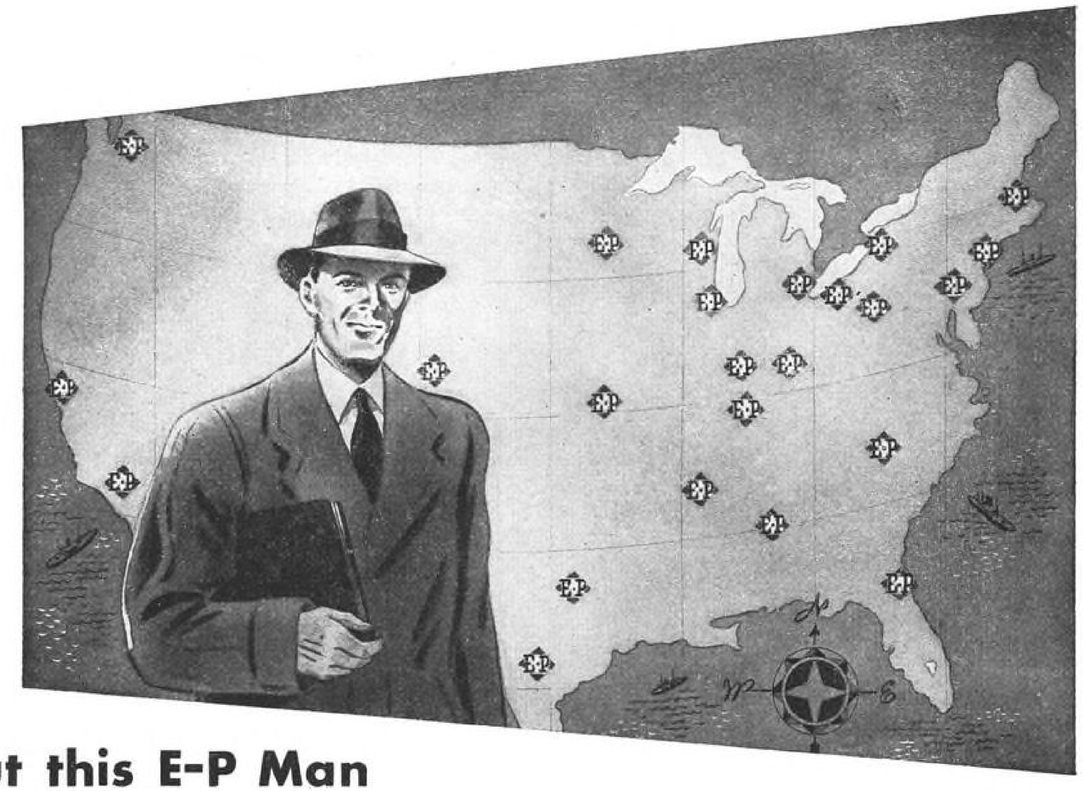

Put this E-P Man on Your Planning Board... as Transportation Advisor

You know him, of course—your local Elwell-Parker Field Engineer. As your profit plans take definite form, it will pay you to know him *better.*

For he is a trained, qualified consultant on Industrial Load Transportation—the vital concern today of your Engineering, Production and Sales Executives alike. The E-P Man can help you to organize Material-Handling Systems to move your loads without waste—in *volume*—with *speed*—with *safety.*

Your local E-P Man is supported by Elwell-Parker's vast experience covering nearly 40 years. Elwell-Parker Power Industrial Trucks and Cranes by the thousands have effected huge savings for companies large and small. All of the experience gained is available through your Elwell-Parker Field Engineer.

Appoint this man your Transportation Advisor. Take him into your confidence as you make vital decisions for your future. He is as close to you as your telephone.

The Elwell-Parker Electric Company, 4125 St. Clair Avenue, Cleveland 14, Ohio.

Dial the E-P Man Today!

Albany 2-4095	Columbus ..... AD 4824	Los Angeles ..... PR 5911	Philadelphia ..... LOM 3710
Birmingham 3-3323	Denver ..... KE 5500	Memphis 8-1648	Pittsburgh ..... AT 6734
Boston ..... COM 5522	Detroit ..... MA 2233	Milwaukee ..... MA 7817	San Antonio ..... TR 3653
Buffalo ..... GR 7664	Ft. Worth 4-6184	Minneapolis ..... GE 3247	San Francisco ..... GA 1827
Charlotte 5026	Indianapolis ..... LI 3131	Montreal ..... HA 7191	Seattle ..... EL 5722
Chicago ..... SUP 7420	Jacksonville 5-1384	New York ..... COR 7-0797	St. Louis ..... LA 4545
Cincinnati ..... MA 0650	Kansas City ..... VA 7021		Syracuse 2-9596
Cleveland ..... MA 8915			Toronto ..... WA 1478

ELWELL-PARKER

POWER INDUSTRIAL TRUCKS

Established 1906

Here, ready for roughing, is a typical line-up of Goodyear-built Corsair fighter planes. They are facing terrific punishment in flights to test their stamina, speed, and maneuverability.

These Corsairs must prove they can take anything and do everything that ace airmen will demand in battle, before their acceptance by the Navy.

For safe lubrication in the gruelling tests their builder, Goodyear Aircraft Corporation, relies on Sinclair Pennsylvania Aircraft Engine Oil.

SINCLAIR AVIATION OILS

FOR FULL INFORMATION OR LUBRICATION COUNSEL WRITE SINCLAIR REFINING COMPANY (INC.), 630 FIFTH AVENUE, NEW YORK 20, N. Y.

Congratulations PCA

● In April, 1927, "Miss Youngstown", a Waco-9, (upper right) was #2 plane in the then meagre fleet of Pennsylvania Airlines —now Pennsylvania Central Airlines. "Miss Youngstown" carried mail between Pittsburgh and Cleveland, a distance of 127 miles. Between mail flights "Miss Youngstown" carried people aloft to supplement the company's income. Eight people handled its operations.

In April, 1944, seventeen years later, Pennsylvania Central operates a large fleet of Douglas DC-3's, equipped with Wright engines. It covers a route of 3,200 miles; serves 12 states and 40 cities and employs nearly 2,000 people. During the past year, in Army service alone, PCA planes flew 4,548,775 miles.

On the occasion of its seventeenth birthday, PCA writes us that:

"BG Plugs are standard equipment on all of our commercial ships and our pilots and maintenance men say they're extremely dependable at all times."

BG is proud of its contribution to PCA's outstanding record of public service and to its amazing record of safety—one of the finest in the industry.

ARMY E NAVY

THE BG CORPORATION
136 WEST 52nd STREET, NEW YORK 19, N. Y.

Contractors to the United States Army, Navy and Coast Guard and Aircraft Engine Builders

Here comes 33 tons of flying box car—and to cushion its landing is no mean accomplishment. Yet it is done successfully with comparatively small and light pieces of equipment—Aerols for the nose shock absorbing unit built by the Cleveland Pneumatic Tool Co. This highly efficient landing gear is equipped with RBC Aircraft Needle Bearings. The static non-Brinell capacity of these bearings has been found eminently suitable for such applications, withstanding heavy shock loads of short duration. This series of RBC Bearings covers a wide range of uses which require sizes from ¼" to 5" inside diameter.

RBC AIRCRAFT
SERIES—#19
C-54 Skymaster
equipped with AEROLS

ROLLER BEARING CO. of AMERICA
TRENTON . . . . NEW JERSEY

A Pioneer in Making Air Serve the Aviation Industry

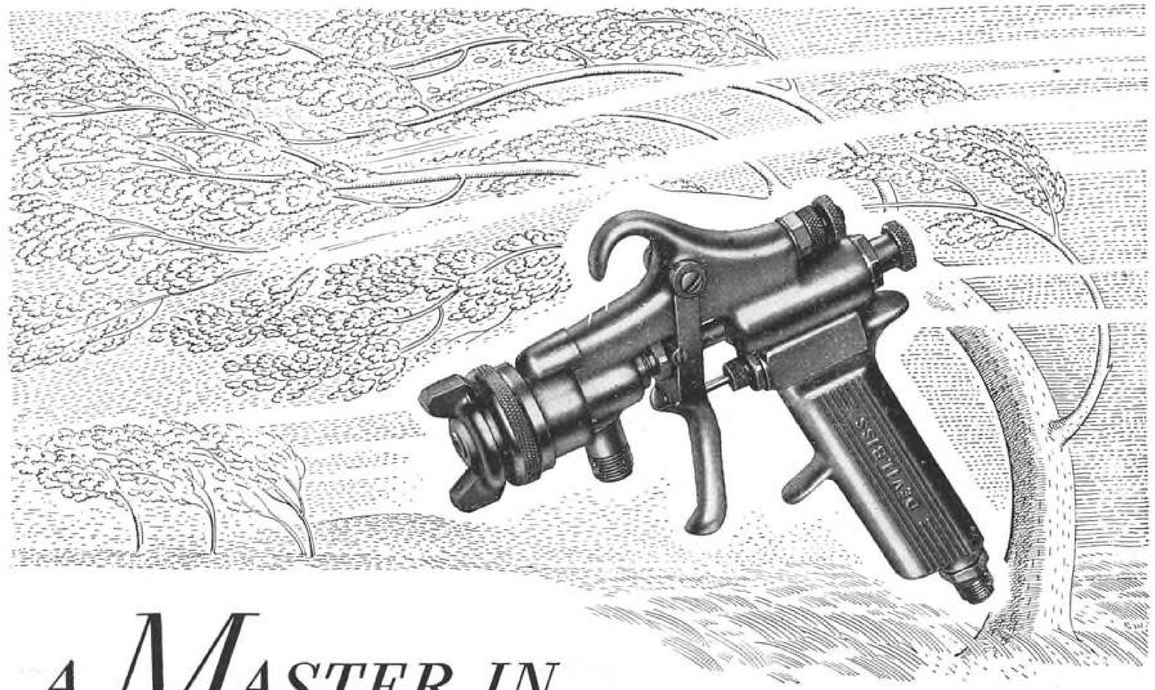

A Master in Harnessing Air

for spraying materials from hot lacquer to sound deadener

● To the Aviation Industry, air is a highway of travel. But to DeVilbiss, air is a tool to aid aviation progress.

DeVilbiss pioneered in harnessing air for applying materials by the spray process more than 56 years ago. Since then we have developed guns that apply a vast range of other materials from grease to caulking compounds—and produced a complete line of equipment for compressing, cleaning, regulating, conveying and exhausting air.

Today, DeVilbiss air-handling and air-operated equipment is proving to be a faster and better way to perform many important production and maintenance operations. It is applying identifying symbols—doping wing fabrics—caulking seams—compressing air for service tools—conveying air, oil, water, gasoline, solvents and hot lacquer—cleaning engine parts—exhausting fumes and dust from shop areas.

Let DeVilbiss' 56 years of air experience show you the many ways air can serve you as a tool—to improve the speed, efficiency and economy of your production and maintenance operations.

THE DEVILBISS COMPANY, Toledo 1, Ohio
Canadian Plant: WINDSOR, ONTARIO

DE VILBISS
Spray Systems

SPRAY EQUIPMENT • EXHAUST SYSTEMS • AIR COMPRESSORS • HOSE & CONNECTIONS

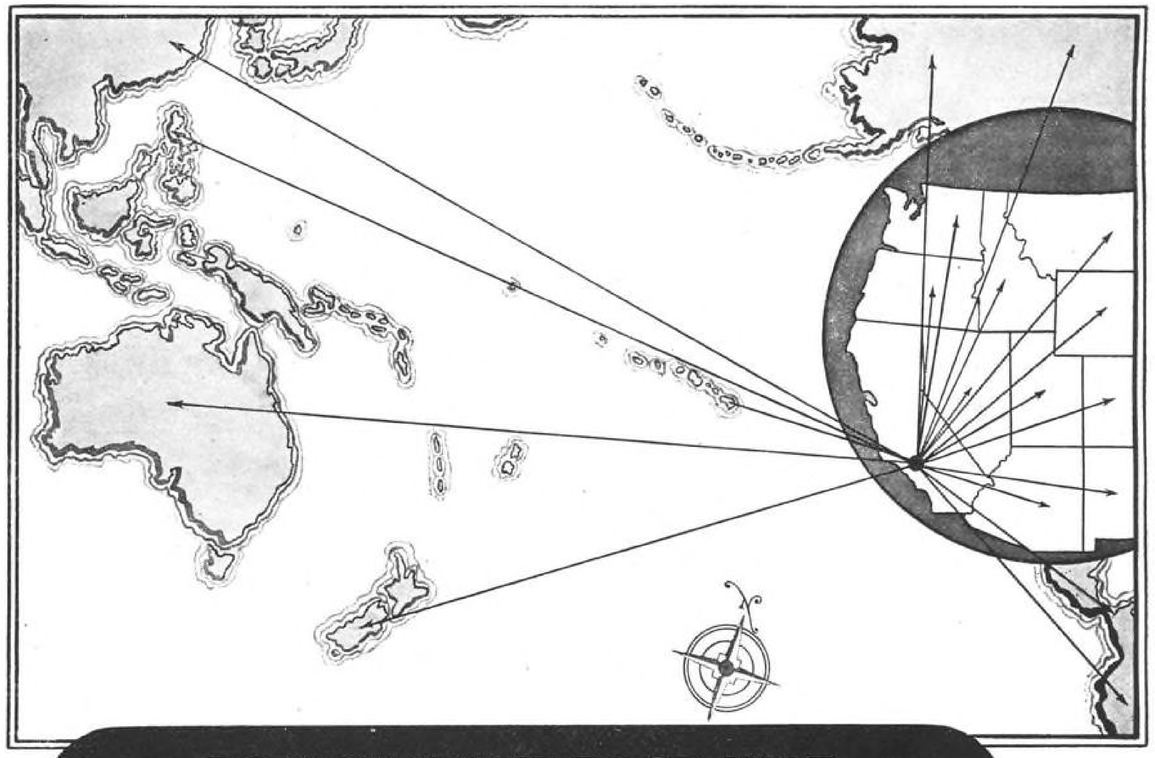

DO YOU WANT POST-WAR PRODUCTION FOR THESE MARKETS?

FOR MANUFACTURERS WHO WANT PRODUCTION FACILITIES SERVING WESTERN AND EXPORT MARKETS

We can handle a worthy share of expanded post-war production on the West Coast. Our machine tool and other facilities are *up-to-date, balanced,* and *thoroughly adequate.*

WRITE FOR BOOKLET "A MODERN PLANT AT WORK"

INVENTORS OR ENGINEERS

If you have a metal product, patented or patent pending, or an invention beyond the idea stage on which you can furnish clear sketches and written description, write us fully about it. We may have an interest in common. Your rights will be scrupulously respected.

NATIONAL MACHINE PRODUCTS
150 W. SLAUSON AVE.
LOS ANGELES 3, CALIF.

PRECISION CRAFTSMEN

PROTECT

THE CRANK PIN BEARING, MAIN BEARINGS AND GIBS ON YOUR PUNCH PRESSES WITH

LINCOLN

CENTRO-MATIC LUBRICATING SYSTEMS

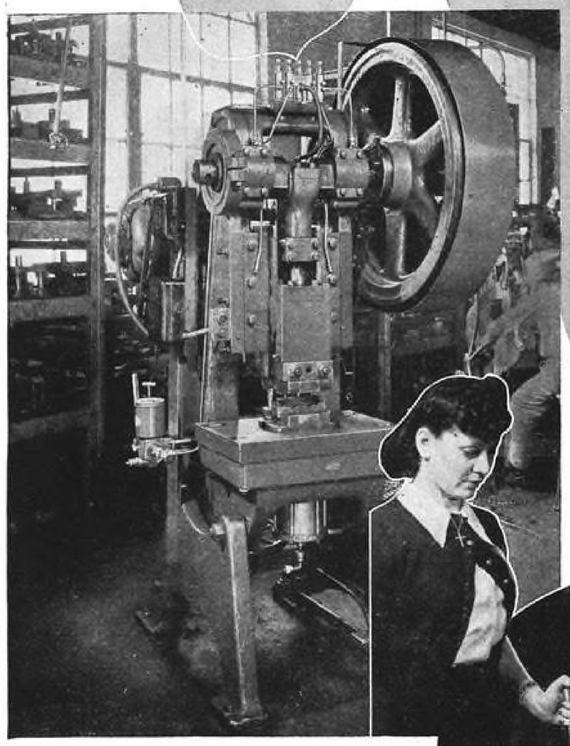

Here is a centralized lubricating system that will safeguard the heavy-duty bearings of your punch presses. This modern lubricating system will minimize bearing failure and down-time, and will save the valuable man-hours wasted by the out-of-date method of lubricating the bearings one at a time.

It is a simple system consisting of a number of Centro-Matic Injectors—one for each heavy-duty bearing—and a hand-operated Centro-Matic Lubricant Pump. A few easy strokes of the pump handle and a measured amount of lubricant is injected into the main bearings, the crank pin bearing, and the gibs. Ask the nearest Lincoln Distributor for details, or write us.

CENTRO-MATIC LUBRICATING SYSTEMS FOR STANDARD PUNCH PRESSES

Available in Complete Kits for Convenience in Ordering and Installing

A Centro-Matic Kit including five injectors, one pump and necessary tubing, brackets, bolts and fittings, ready for installation on a plain, single gib punch press costs $65.00. Kits for back geared punch presses and multiple gib punch presses are available at proportionately higher prices.

Easy to Install

Centro-Matic Lubricating Systems are simple to install. Complete instructions come with each kit and any handy maintenance man can quickly make the installation. No special tools or outside assistance is required.

144-5 *BUY MORE WAR BONDS*

ARMY E NAVY

LINCOLN ENGINEERING COMPANY
Pioneer Builders of Engineered Lubricating Equipment
5701 NATURAL BRIDGE AVE., ST. LOUIS 20, MO., U. S. A.

Active service pays off!

Crown engineers' field-experience in adapting Crown Zippers to meet special military jobs will pay big postwar dividends to you!

When this war started, Crown Zipper engineers went right out into the field with our armed forces to develop zippers for tents, sleeping bags, aircraft covers, and countless other military items.

Crown engineers were also called on to *redesign* hundreds of existing closure applications—and out of this experience came some of the most amazing developments in zipper history.

Today there's a Crown Zipper that actually slides freely around curves—a zipper with *ten* sliders on one track, providing smooth closures in both directions—zippers that are big and tough, yet easy to operate—zippers that are small and dainty, yet virtually indestructible! (See list of Crown superiorities below.)

When the war is over, Crown's tremendous backlog of experience will prove invaluable to aircraft manufacturers. For our designers will be able to sit down with your designers and adapt—or, if necessary, *create*—special Crown Zipper features to meet special jobs.

Remember, when *you* turn to postwar planning: Crown Zipper designs aren't frozen—Crown adapts the zipper to the job.

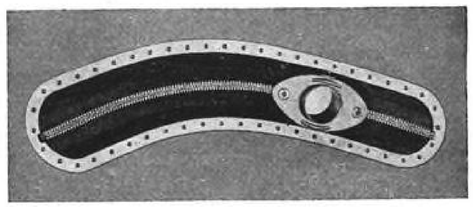

NEW "Double-Acting" Crown Zipper on airplane gun turrets opens ahead of gun, closes behind it, protecting gunner from cold.

CROWN ZIPPERS are 5 ways better

1. Takes sharp curves

2. Die-cast for smoother action—extra strength

3. Provides opening wherever you want it

4. Won't lock open

5. Resists corrosion

Member of the J. & P. Coats • Clark's O.N.T. Family

THE SPOOL COTTON COMPANY • *745 Fifth Avenue, New York, N. Y. (Crown Fastener Division)*

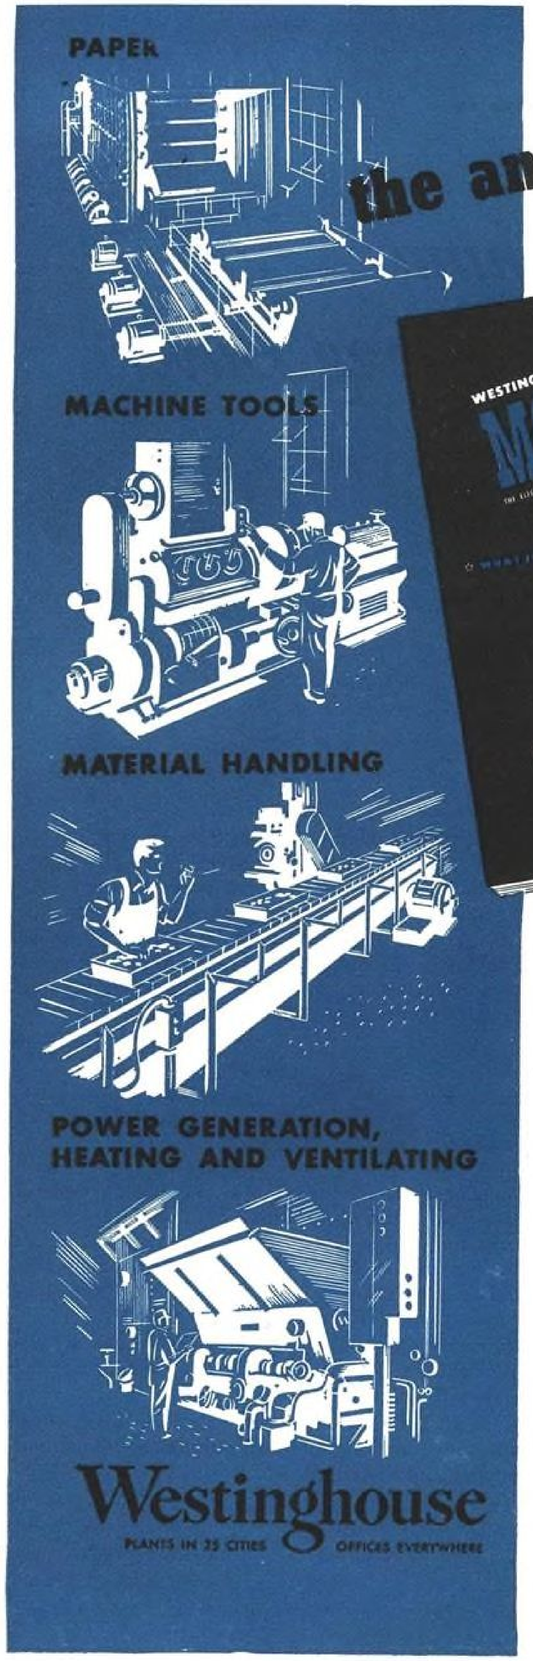

the answer is in this book

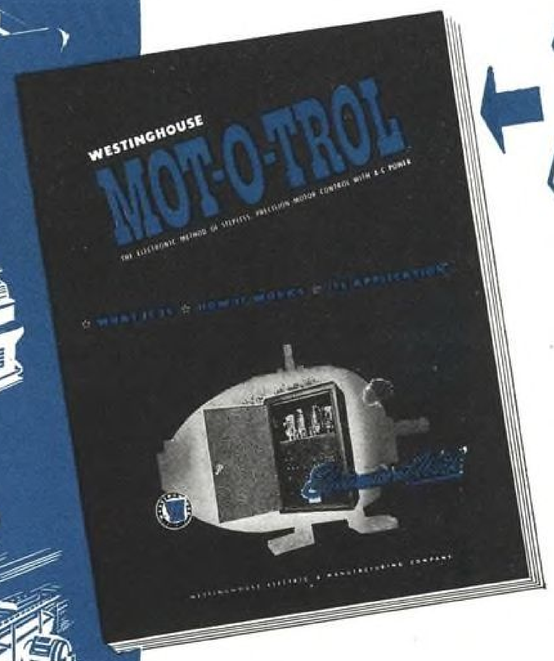

ELECTRONIC

MOTOR CONTROL

How to get Stepless d-c Motor Speeds from an a-c Current Supply

Mot-o-Trol, developed by Westinghouse, employs the precision of electronics to provide a new, wide, *stepless* range of speed control for d-c motors from an a-c current source. It starts motors, brings them up to preset speed smoothly and rapidly. It permits wide change of speed at any time, regulates speed under varying loads, applies dynamic braking for timed stopping—and reverses the motor. Many other functions are also possible. There are no separate linestarters—no field rheostats. To get all the facts about this new packaged motor drive, write today for your copy of booklet B-3301. Westinghouse Electric & Manufacturing Company, East Pittsburgh, Pa., Dept. 7-N.

J-21306

MOT-O-TROL

Electronics at Work

The Dilemma of the Aviation Advertising Buyer

THERE ARE 36 PUBLICATIONS *listed in the Aviation Business Paper Section of Standard Rate and Data today. (In 1940 there were 9.)*

They offer circulation ranging from 3,000 to 251,000. Their sales representations are many and varied — creating a perplexing challenge to those responsible for the intelligent building of an advertising program that will reach the true buying influences of aviation.

We believe that a simple definition of the aviation industry with relation to current and post-war market opportunities may help clear the air. Each of the 36 publications may then be viewed in proper marketing perspective and weighed on the value of the service it renders.

Aviation's Market Structure

There are three basic divisions of the aviation industry. Military aviation, air transport and private flying.

Today the dividing lines between them are almost indistinguishable — so that current sales opportunities are all essentially military.

But after the war, this will change. Air transport and private flying will again become specialized marketing areas distinct from military aviation.

Aviation advertising has a dual objective today

Even as aviation suppliers concentrate on their first job of winning the war — they must lay the groundwork for the changed marketing conditions of peacetime.

Thus sound advertising planning today embraces these essential considerations: *Continuing coverage of the military market*—for military aviation has always been, and for some time probably will continue to be, the industry's best customer measured in dollars. *Thorough coverage of air transport*, which joins the railroad, marine and motor transport industries as one of our great public carriers. *Sound coverage of private flying* — primarily the fixed base operators and distributors who will sell and service private planes, distribute parts and accessories and encourage flying through flight instruction and auxiliary services.

Functions of the Industry

Manufacturing, operation, maintenance and distribution — often loosely referred to as divisions of the industry — are not divisions but functions.

They are closely interrelated functions within each of the three basic divisions.

This interrelationship is of the utmost sales importance. For manufacturing executives — designers, engineers and production men — are concerned not only with the building of planes, engines and components, but also with the operation and maintenance of their products. Conversely, operation and maintenance men exert important influence on the designing and engineering of the planes they will later buy and service.

For example, the Douglas DC4, the Boeing Stratoliner, the Pan American Clipper are products of the combined engineering abilities and operation and maintenance experience of the airlines and the manufacturers. Likewise military aircraft are joint products of the manufacturers and the air forces.

In the same way the fixed base operator has an important stake in the design and engineering of the planes he will sell and service.

Thus in all three of aviation's fields, no sharp lines separate the functions of manufacturing, operation, maintenance and distribution.

These basic considerations provide the key to the sound and adequate building of an aviation advertising program. They clearly indicate the importance of a broad-coverage industry publication to act as the foundation medium of your advertising schedule.

Foundation Coverage—
the marketing function of Aviation magazine

Since its first issue in 1916, *Aviation's* editorial policy has been the serving of *all* the industry's interlocking interests.

For example — *Aviation's* Design Studies are of vital interest not alone to the designer but also to engineers, production, operation and maintenance men, fixed base operators and other groups.

Through *Aviation's* breadth of editorial coverage, not only maintenance men, but also engineers, designers and production heads, operators and distributors keep abreast of maintenance developments.

The stories of new planes, new equipment and new power plants are important to *all* management men, regardless of their field or function.

Embraced within *Aviation's* average issue of 115 editorial pages are 87 pages of first interest to maintenance men — 96 to manufacturers — 68 to operation executives — 64 to distributors. So it is throughout all branches of the industry.

That is why *Aviation* is read by over 42,000 paid subscribers of multiple interests.

And that is why *Aviation* maintains the largest staff of editorial specialists in the field.

Thus *Aviation's* marketing function is clearly defined — to serve the multiple information needs of the men who are responsible for the designing, engineering, production, merchandising, regulation, operation and maintenance of aircraft.

Because aviation has entered the most important period of development in its history, McGraw-Hill last year began publication of two new aviation magazines. Their purpose — to intensify information service to meet the increasing demands of war and postwar.

Aviation News—to intensify top-management coverage

The swift developments in aviation today demand week-to-week, authoritative presentation of all the news of aeronautical significance. Aviation leaders and planners are the busiest men in U.S. industry today, and they must keep pace with all significant news developments. To meet this need, we began publication in August 1943 of the only weekly in the field—*Aviation News*. The urgent demand for *Aviation News* is indicated by the fact that 8258 of the most influential men in aviation have subscribed to this new-type publication within its first eight months.

Air Transport—
for specialized coverage of air transportation

As air transportation takes its place alongside our other great carriers of passengers and cargo, there has grown an urgent need for a publication devoted wholly and exclusively to its special interests. To meet this need we began publication in September 1943 of *Air Transport*. Within seven months it has become the strong national voice of the industry. From the men who guide the progress of air transportation — its operating and maintenance executives, its financial interests, its government and civilian authorities — has come immediate recognition of the important editorial leadership of *Air Transport*. To date 7364 of these men have paid over $30,000 to keep pace with the developments of air commerce through the pages of *Air Transport*.

We believe that these three magazines — Aviation, Aviation News *and* Air Transport — *offer the most effective method of reaching the true buying influences of the aviation industry — now and in the critical period ahead.*

AVIATION ★ AVIATION NEWS ★ AIR TRANSPORT

McGraw-Hill Publishing Co., Inc. 330 West 42nd Street, New York 18, N. Y.

FINISHING *school*

FOR PRECISION PILOTS

It's no mere chance that pilots learn to fly with precision on their Axis-blasting missions. Uncle Sam takes care of that with advanced trainers like this Curtiss-Wright AT-9 which is powered by two SKF-equipped Lycoming engines. On engine crankshafts, the one-piece retainer of SKF Cylindrical Roller Bearings provides ease of disassembly and permits a thorough inspection of all parts. When airmen learn the importance of SKF performance in training, they remember it after they graduate to the ever-increasing number of fighters and bombers that darken Axis skies. 5552

SKF INDUSTRIES, INC., PHILADELPHIA 34, PA.

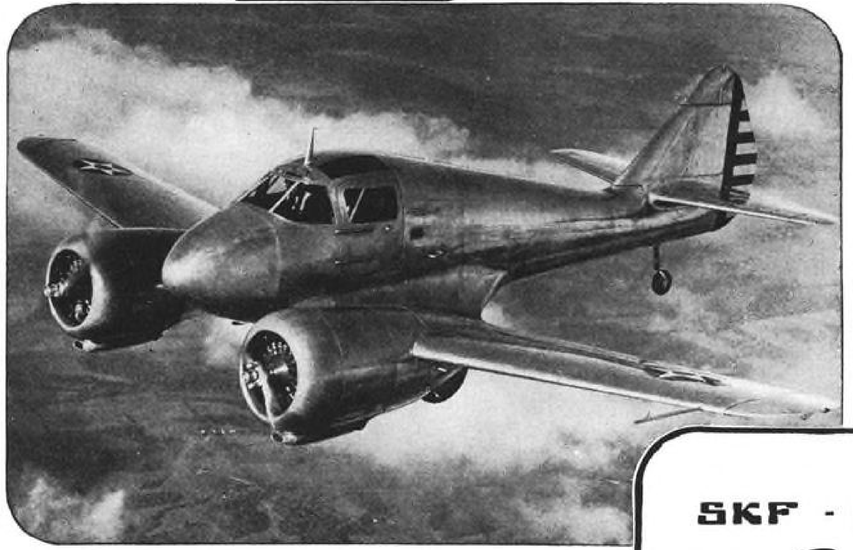

ARMY E NAVY

SKF - EQUIPPED

Engines

built by Lycoming Division—The Aviation Corp. for AT-9's manufactured by Curtiss-Wright Corp.

Answer to an Airline's Prayer... The Martin Mars Transport!

In the 82-ton Mars transport, postwar airline operators will have no visionary, untried design, no hastily converted bomber. Instead, they will have a successful type, thoroughly tested in over-ocean transportation. The 20 sister-ships of the original Mars are being built from the ground up as transports. Only more elaborate furnishings are needed to change them into luxury liners. More important, production lines for the JRM will, at war's end, be completely tooled and manned by experienced workers. This means fast delivery of commercial versions in tomorrow's swing toward supremacy of the skyways. For information, write THE GLENN L. MARTIN CO., BALTIMORE-3, MD.
GLENN L. MARTIN-NEBRASKA COMPANY—OMAHA

Martin AIRCRAFT
Builders of Dependable Aircraft Since 1909

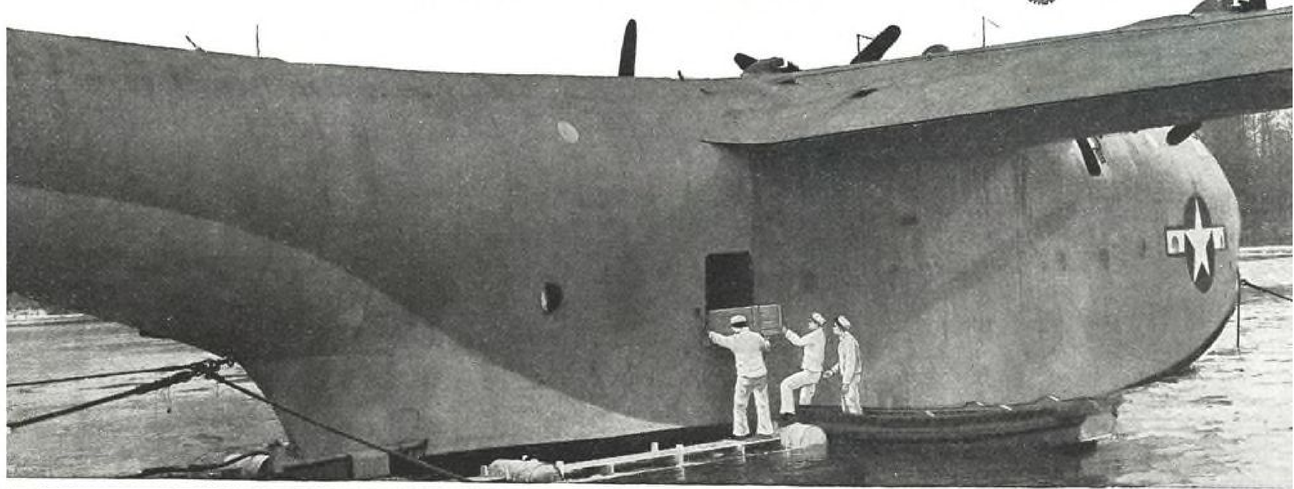

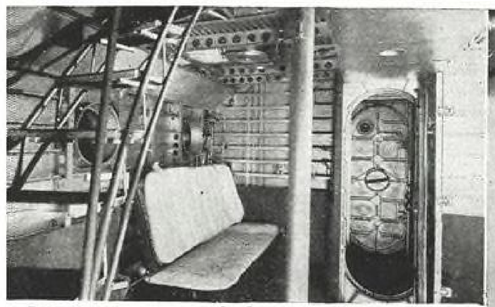

RUGGED STRENGTH is demonstrated by the heavy, ship-type door separating the many water-tight compartments of the Mars. Most prospective airline passengers prefer the safety of flying boats for ocean flights.

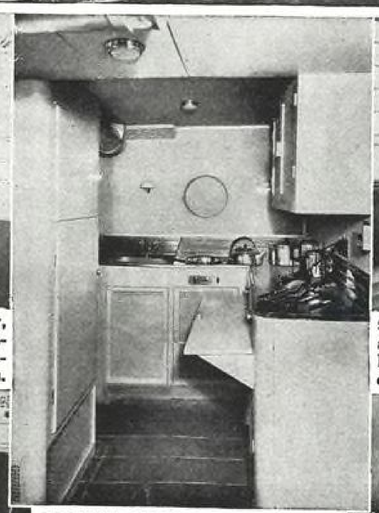

ROOMY GALLEY . . . only one end shown in this photo . . . is marvel of compactness. Facilities include refrigerator, electric range, running water. Complete meals for many passengers may be prepared here. The Mars also boasts steam heat, air conditioning, showerbath, 110-volt electrical facilities.

SLEEPING ACCOMMODATIONS of JRM are comfortable but plain. Luxurious fittings and decorations will be installed in commercial versions. Refurnished, this cabin would compare with those on ocean liners.

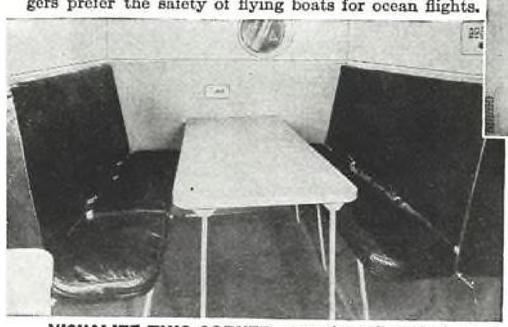

VISUALIZE THIS CORNER, smartly redecorated, on a commercial version of the Mars-type transports. Trans-ocean passengers would find it ideal for meals, games or a pleasant chat. This is a real flying *ship!*

CONTROL CENTER of the Martin Mars, as seen from the pilot's compartment, shows captain's desk, radio operator's panel, plus accommodations for navigator and flight engineer. Stairs at the left lead to deck below.

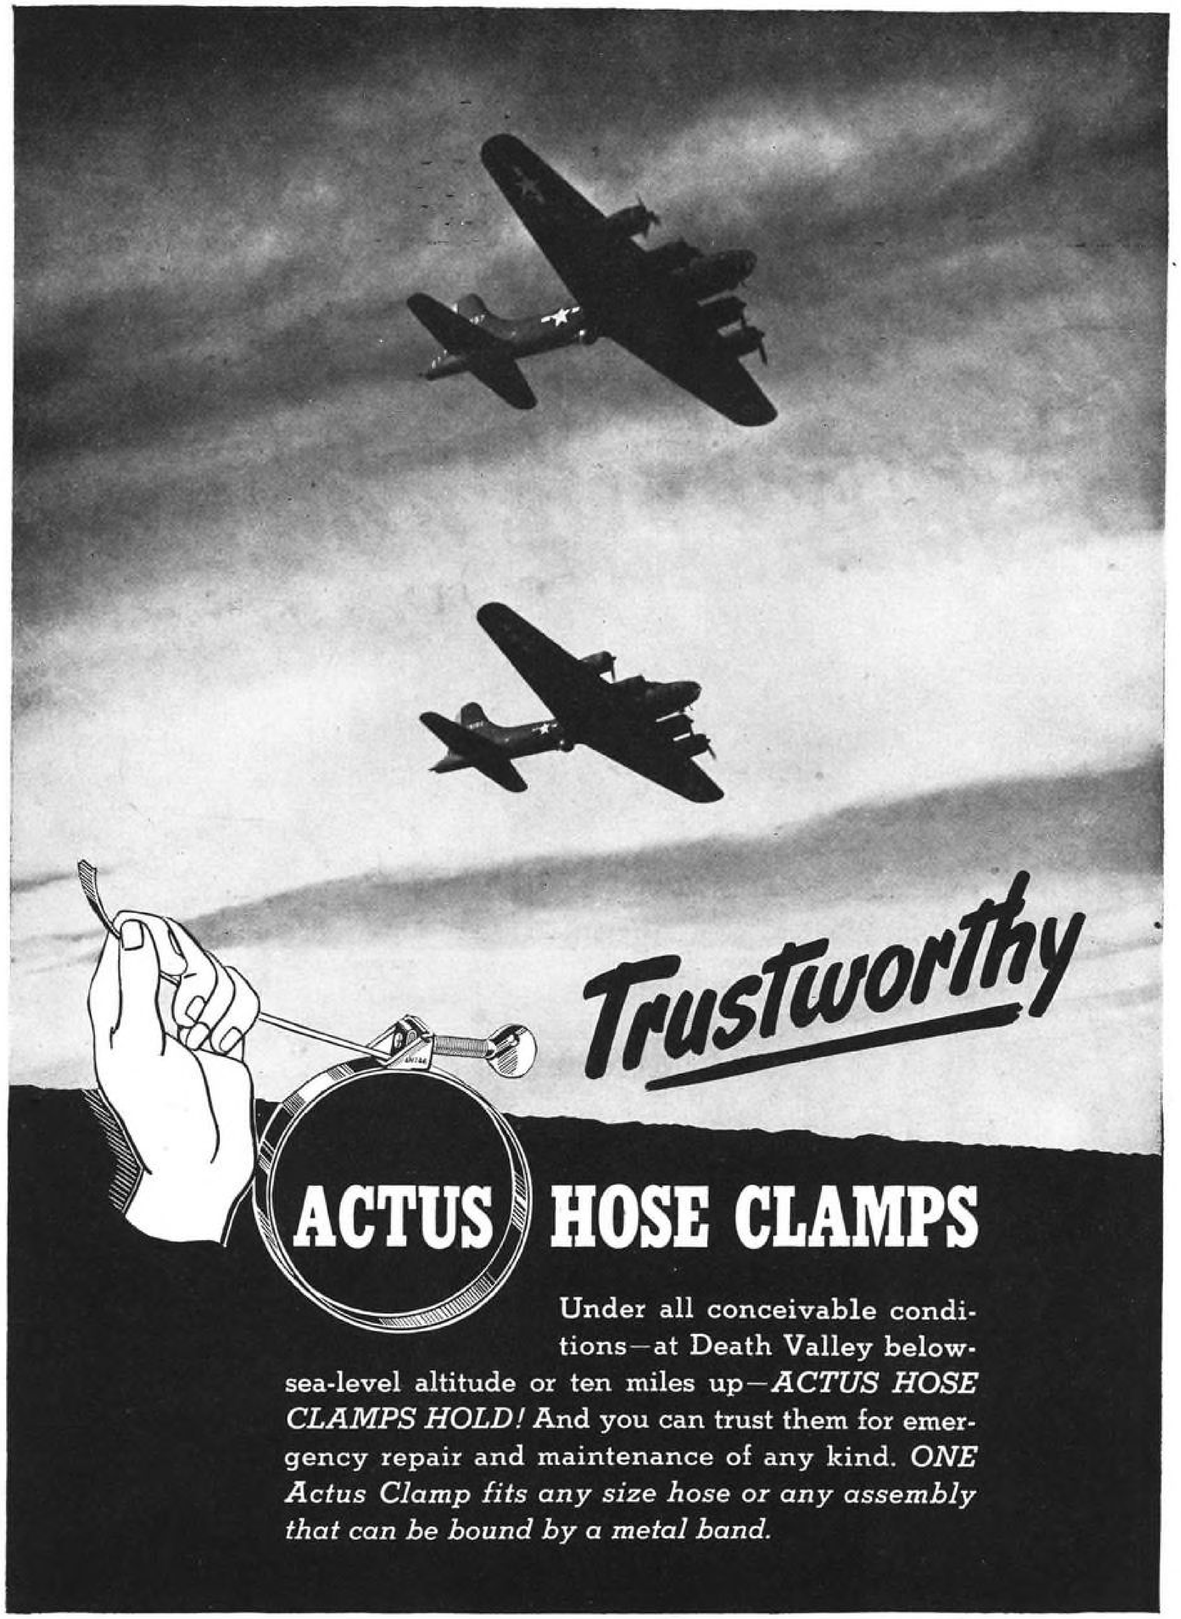

ACTUS PRODUCTS COMPANY • MOUNT VERNON • NEW YORK

This is the tenth of a series of statements by aviation's leaders on THE SHAPE OF FLYING TO COME.

"Over 'the hump' to a better world!"

says GUY W. VAUGHAN, *President of Curtiss-Wright Corporation*

"OVER THE AERIAL BURMA ROAD, *which our airmen call 'the hump,' planes of the Army's Air Transport Command now deliver more monthly tonnage into China than was ever carried overland.*

"Yet this is only 500 miles in a total of 110,000 miles of new air routes that have been opened to meet our war needs. And the men who are making a 'milk run' of this route are but a fraction of America's 3,000,000 fliers and ground crewmen.

"Facts like these signal all sorts of potentialities for a better world and a permanent peace. But if these potentialities are to be realized, America must get over another 'hump.' America must solve its aviation problems—problems of conversion and finance, of air rights and foreign policy, of government regulation and national security.

"This *'hump' can be conquered only if those of us who build air power will work and plan jointly with all straight-thinking, enlightened Americans outside the industry."*

THUS MR. VAUGHAN points out how the great promise of America-in-the-air can be fulfilled only with the active support of America's enlightened public. The natural leaders of these citizens are concentrated in aviation's waiting "test-pilot market"—a market of people who (in business or in private living) are habitually first to accept any change for the better.

This is the market aviation thinks of when it thinks of the more-than-a-million TIME-reading families—*people with the foresight, income, and influence that aviation needs to sponsor its programs—(people able to support with their patronage and prestige any business which executives now in aviation may enter after the war).*

Believing that the ideas of aviation's leaders are always of interest to the aviation industry,
TIME here gives them wider circulation
in the name of

AVIATION'S SILENT PARTNERS — TIME — THE READERS OF TIME

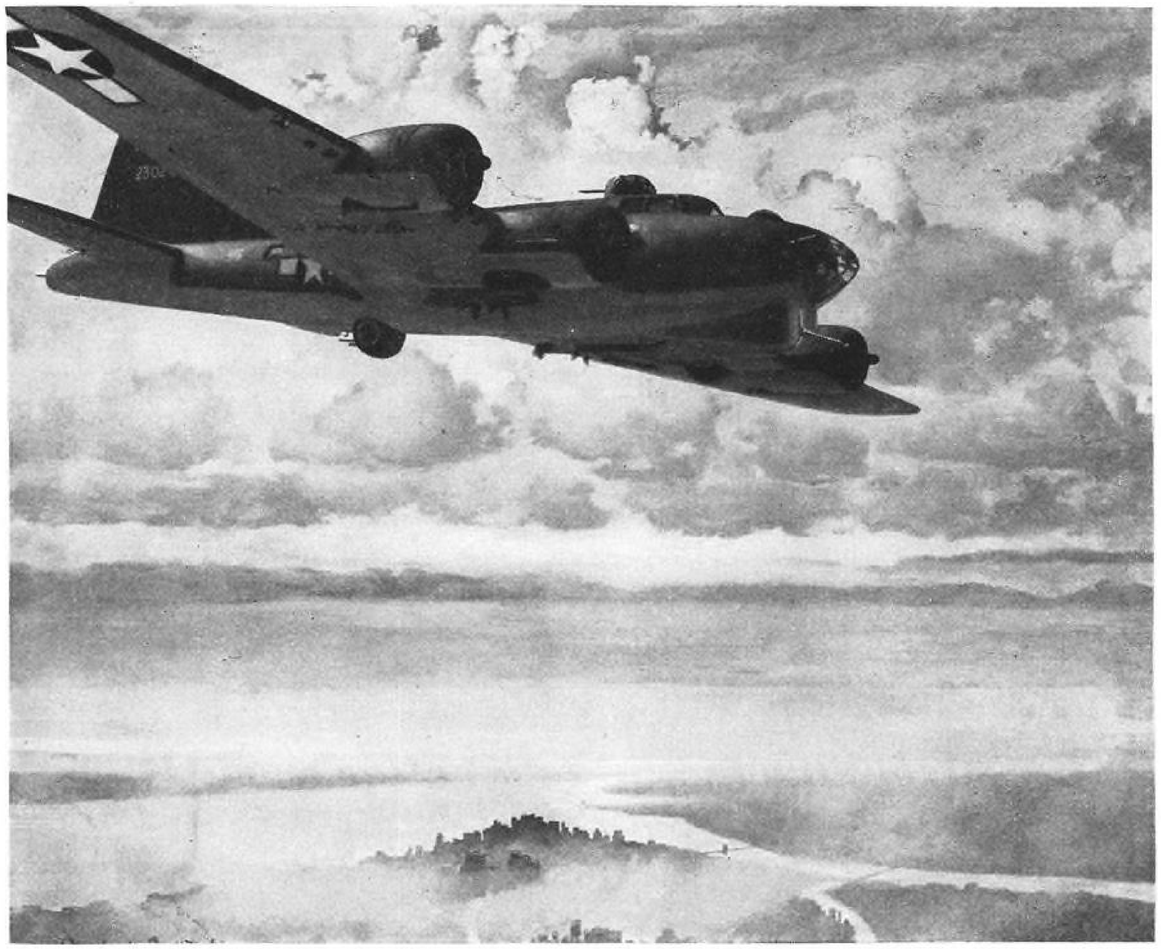

© 1944, The Studebaker Corporation

"We all have faith in those engines!"

THE pilot of a Boeing Flying Fortress wrote the following about his bomber and the Studebaker-built Wright Cyclone engines that power it:

"I fly one every day and think there is no other ship her equal. We all have faith in those Cyclone engines."

Studebaker, famous for its peacetime motor cars and trucks, has already built tens of thousands of the mighty power plants with which the Flying Fortress has winged its way to world-wide victories.

But Studebaker realizes that this great four-engine Boeing bomber is merely part of an all-star team of other bombers, fighters, seaplanes, transports and observation planes that makes America's air might so effective.

All the valiant men and women of the Army, the Navy, the Air Forces, the Coast Guard and the Marine Corps know that the success of America's armed forces depends upon teamwork.

There is glory enough in decisive victory to give everyone who helps a share. And so Studebaker workers proudly and steadfastly keep on producing Wright Cyclone engines for the Boeing Flying Fortress—big, multiple-drive military trucks—and other vital war matériel.

Look ahead with Uncle Sam and buy more War Bonds now. Every Bond is a safeguard for the future . . . your country's future and your own.

Studebaker BUILDS WRIGHT CYCLONE ENGINES FOR THE BOEING FLYING FORTRESS

A die-cast part like this

adds lightness to lightness

Thin walls, possible in Mazlo Magnesium die castings, permit weight saving on a mass production basis unequaled by any other process. Because the molten metal is forced into dies under high pressure, wall thicknesses can be much thinner than those cast in sand or permanent molds.

Note the fineness of detail in that Mazlo Magnesium die casting. With but little machining, it is ready for the assembly line. And even that work goes fast, for magnesium machines smoothly and accurately at high speeds. The combination of thin sections, low fabricating and machining costs frequently places magnesium die castings on a competitive basis with the heavier metals.

Among the magnesium products going into our fighting planes are many die castings made by American Magnesium Corporation. Their extreme lightness, compactness and dependability are contributing to the advancement of aircraft design. They will do the same for you.

Our engineers will assist you in adapting magnesium die castings to your wartime or postwar products. Aluminum Company of America, Sales Agent for Mazlo Magnesium Products, 1713 Gulf Bldg., Pittsburgh 19, Pa.

MAGNESIUM MAZLO PRODUCTS

AMERICAN MAGNESIUM CORPORATION

SUBSIDIARY OF ALUMINUM COMPANY OF AMERICA

Check your answer, YES or NO...

on the question of a TRICYCLE LANDING GEAR

YOU'VE heard what the experts and prophets are saying about tomorrow's peacetime planes. And now it's *your* turn to speak up!

Right now, at the Bellanca plants, day and night, we're building the twin-engined AT-21-BL crew trainer, together with vital Army Air Forces warplanes armament and components. But we're thinking about *your* post-war plane, too — and it's none too early for *you* to do some planning.

To get the views of future aircraft owners, we're circulating an interesting and useful Aircraft Quiz. The landing-gear question stated above is one of the many appearing on this Quiz. Other Quiz features ask the number of engines you prefer?—how many seats?—what speeds and range?—what size and type of engine?—how will your plane be operated?—whether you place Speed, Economy, Safety or some other outstanding characteristic *first*?—and many other questions bearing on the size and kind of aircraft you will want after our enemies are defeated...after you and yours have returned to the American way of life and liberty.

Thousands are asking us for copies of this provocative post-war Aircraft Quiz. Shall we send it to you? It's arranged simply, so you can check off the answers in a few minutes. Then you can compare *your* answers with those of many other aviation enthusiasts who are now making their plans for peacetime flying. Just send your name and address to us—you'll receive the Aircraft Quiz by return mail.... Bellanca Aircraft Corporation, Dept. S-3, New Castle, Delaware.

Keep on Buying U. S. WAR BONDS

BELLANCA

THE TAKE OFF . . .

A mission to be accomplished. Its success depends upon the pilot and his equipment. Pilots of business in the post-war era must also depend upon equipment . . . much of it war-born . . . some of it still veiled in military secrecy. Bush Intercoolers are providing planes of the United Nations with the superior critical altitude vital to victory. Bush experience in heat transfer, with its hundreds of commercial and industrial applications, will provide many a post-war business pilot with the equipment necessary to success. Our engineering staff is at your command. BUY WAR BONDS.

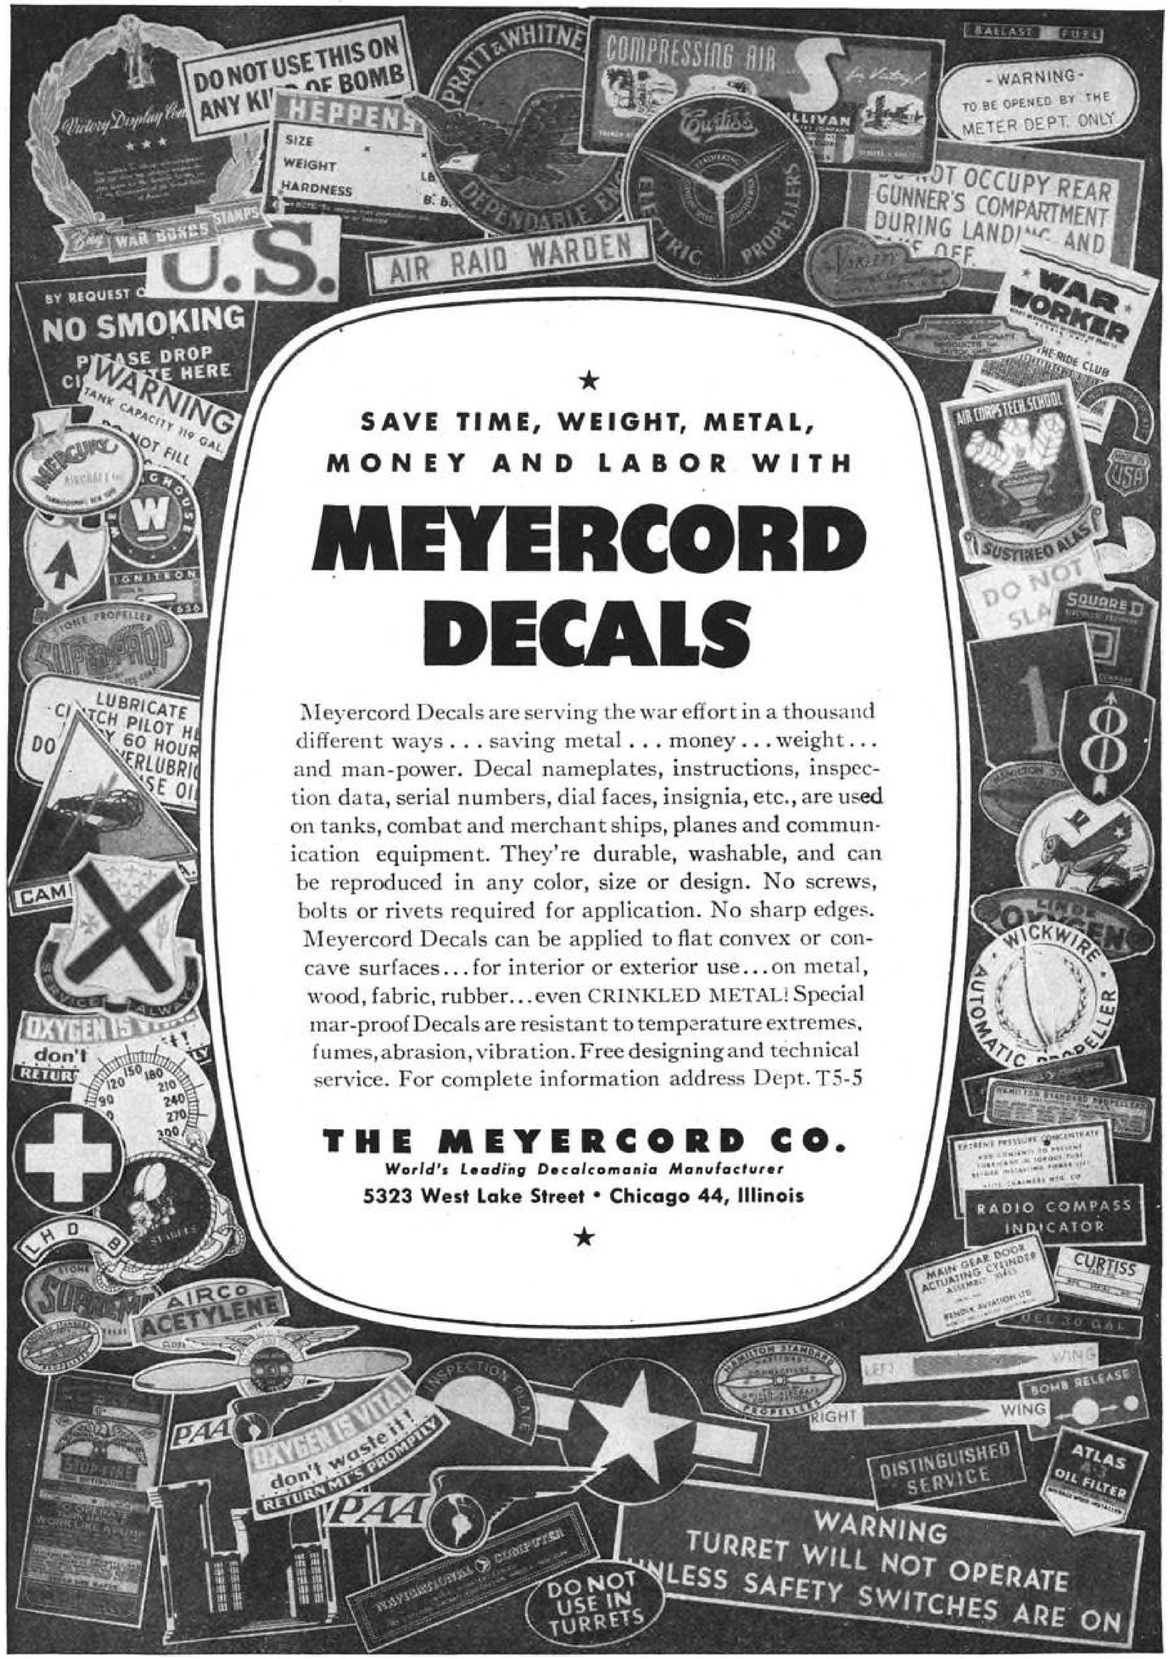

★

SAVE TIME, WEIGHT, METAL,
MONEY AND LABOR WITH

MEYERCORD DECALS

Meyercord Decals are serving the war effort in a thousand different ways . . . saving metal . . . money . . . weight . . . and man-power. Decal nameplates, instructions, inspection data, serial numbers, dial faces, insignia, etc., are used on tanks, combat and merchant ships, planes and communication equipment. They're durable, washable, and can be reproduced in any color, size or design. No screws, bolts or rivets required for application. No sharp edges. Meyercord Decals can be applied to flat convex or concave surfaces . . . for interior or exterior use . . . on metal, wood, fabric, rubber . . . even CRINKLED METAL! Special mar-proof Decals are resistant to temperature extremes, fumes, abrasion, vibration. Free designing and technical service. For complete information address Dept. T5-5

THE MEYERCORD CO.

World's Leading Decalcomania Manufacturer

5323 West Lake Street • Chicago 44, Illinois

★

...Sorry, bossie!

Sorry that we have to encroach on your domain, bossie. But such is life. Things have to make way for progress and your favorite cow pasture, small though it is, will be an air field for feeder line service one of these days. We're working on this idea here at Fletcher—a plane that will carry a good payload (convertible for passengers or cargo) at a reasonable speed, and that can get in and out of your cow pasture. If you know some folks that are interested, you might suggest that they drop us a line.

FLETCHER
AVIATION CORPORATION
PASADENA, CALIFORNIA

MANUFACTURERS OF AN INCREASING SUPPLY OF WAR GOODS UNDER THE MANAGEMENT OF FLETCHER BROTHERS

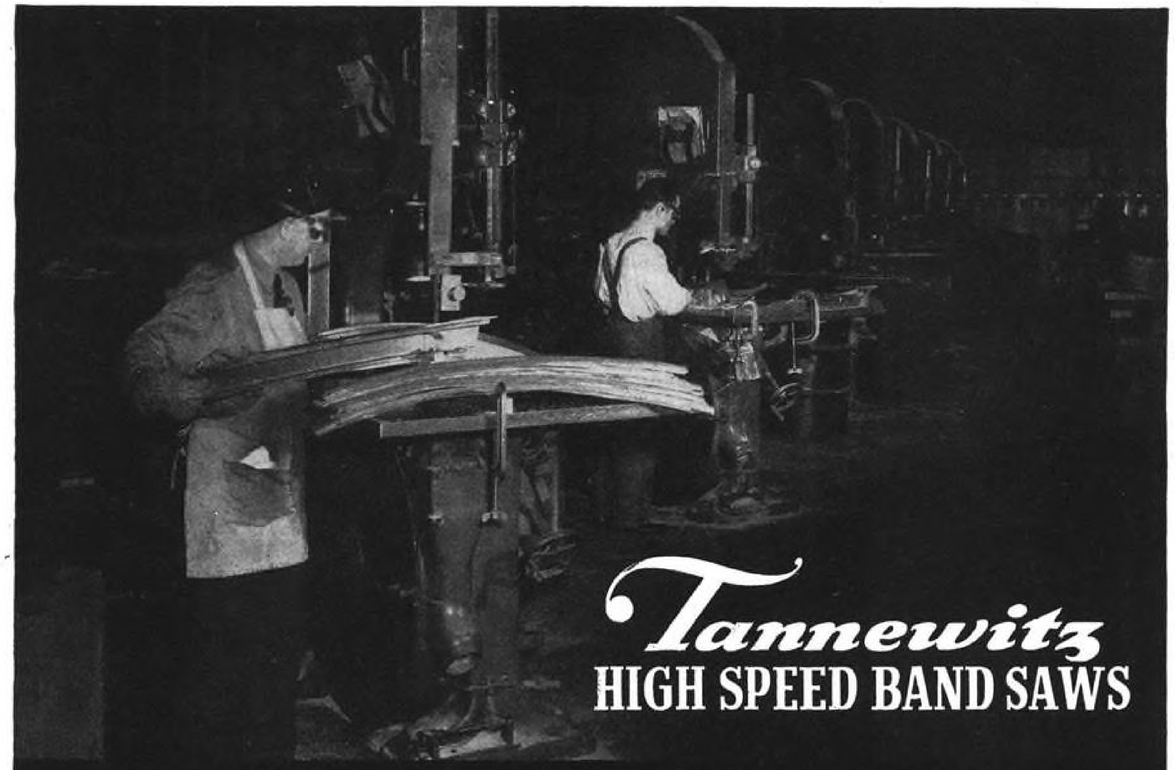

Tannewitz
HIGH SPEED BAND SAWS

With Nearly 2 MILLION "BITES" per minute They Cut Sheet Steel Like Butter

With the bite of nearly two million saw teeth per minute frictional heat is produced, which makes the cutting of mild steel sheets up to ¼ inch and non ferrous materials of greater thickness (either formed or flat) with these machines the fastest, smoothest method in existence . . . a fact which is soundly attested to by their production records in the majority of the country's leading aeronautical plants and hundreds of other metal working factories. Smooth, vibrationless and perfectly safe, these machines are designed specifically for high speed operation by the originators of the high speed band saw, and embody many patented features found in no other band saw. If you want to step up production and cut costs, by all means write for bulletin, "HIGH SPEED METAL CUTTING BAND SAWS."

OTHER TANNEWITZ PRODUCTION EXPEDITERS: FOUNDRY BAND SAWS — Single and variable speed for cutting off gates and risers of castings of any size or metal; DI-SAWS — for inside and outside sawing, chain filing, and polishing. Write for bulletins.

THE TANNEWITZ WORKS, GRAND RAPIDS, MICH.

GOOD NEWS!

Better light-gauge metal welding . . .

WITH THE IMPROVED

WILSON No. 520-A ELECTRODE

Made in 1/16", 5/64" and 3/32" sizes

IT'S especially designed for AC or DC welding of light gauge chromemoly and similar steels used in aircraft construction. Made to a completely new formula, the Wilson No. 520-A Shielded Arc Electrode provides these four notable improvements:

1. Better appearance of deposit
2. Stronger arc action
3. Reduced arc interference
4. Ability to work at higher currents without deterioration of coating at stub end.

And that's not all! This electrode is available in all three popular aircraft welding sizes—1/16", 5/64", and 3/32" diameters, 9", 12" and 12" lengths respectively. It is used with AC and is also satisfactory for DC operation, straight or reversed polarity.

Test specimens welded with Wilson No. 520-A show tensile strengths of 80,000 to 90,000 psi. It meets the requirements of U. S. Army Air Corps Specification 10286B, and conforms to A.W.S. and A.S.T.M. Specifications for Classification E 6013.

For complete details on the Wilson No. 520-A call or write any authorized Wilson distributor. Or mail the coupon for prices and data on Wilson's complete line of AC and DC electrodes.

WILSON

WILSON WELDER and METALS CO., INC.

General Offices: 60 East 42nd Street, New York 17, N. Y.

Authorized Distributors in Principal Cities

MAIL COUPON FOR FULL DETAILS

WILSON WELDER & METALS CO., Inc.
60 East 42nd St., New York 17, N. Y.

Please forward by return mail copies of

☐ Wilson Electrode Price List

☐ Electrode Consumption Calculator

NAME.....

COMPANY.....

ADDRESS.....

CITY.....STATE.....

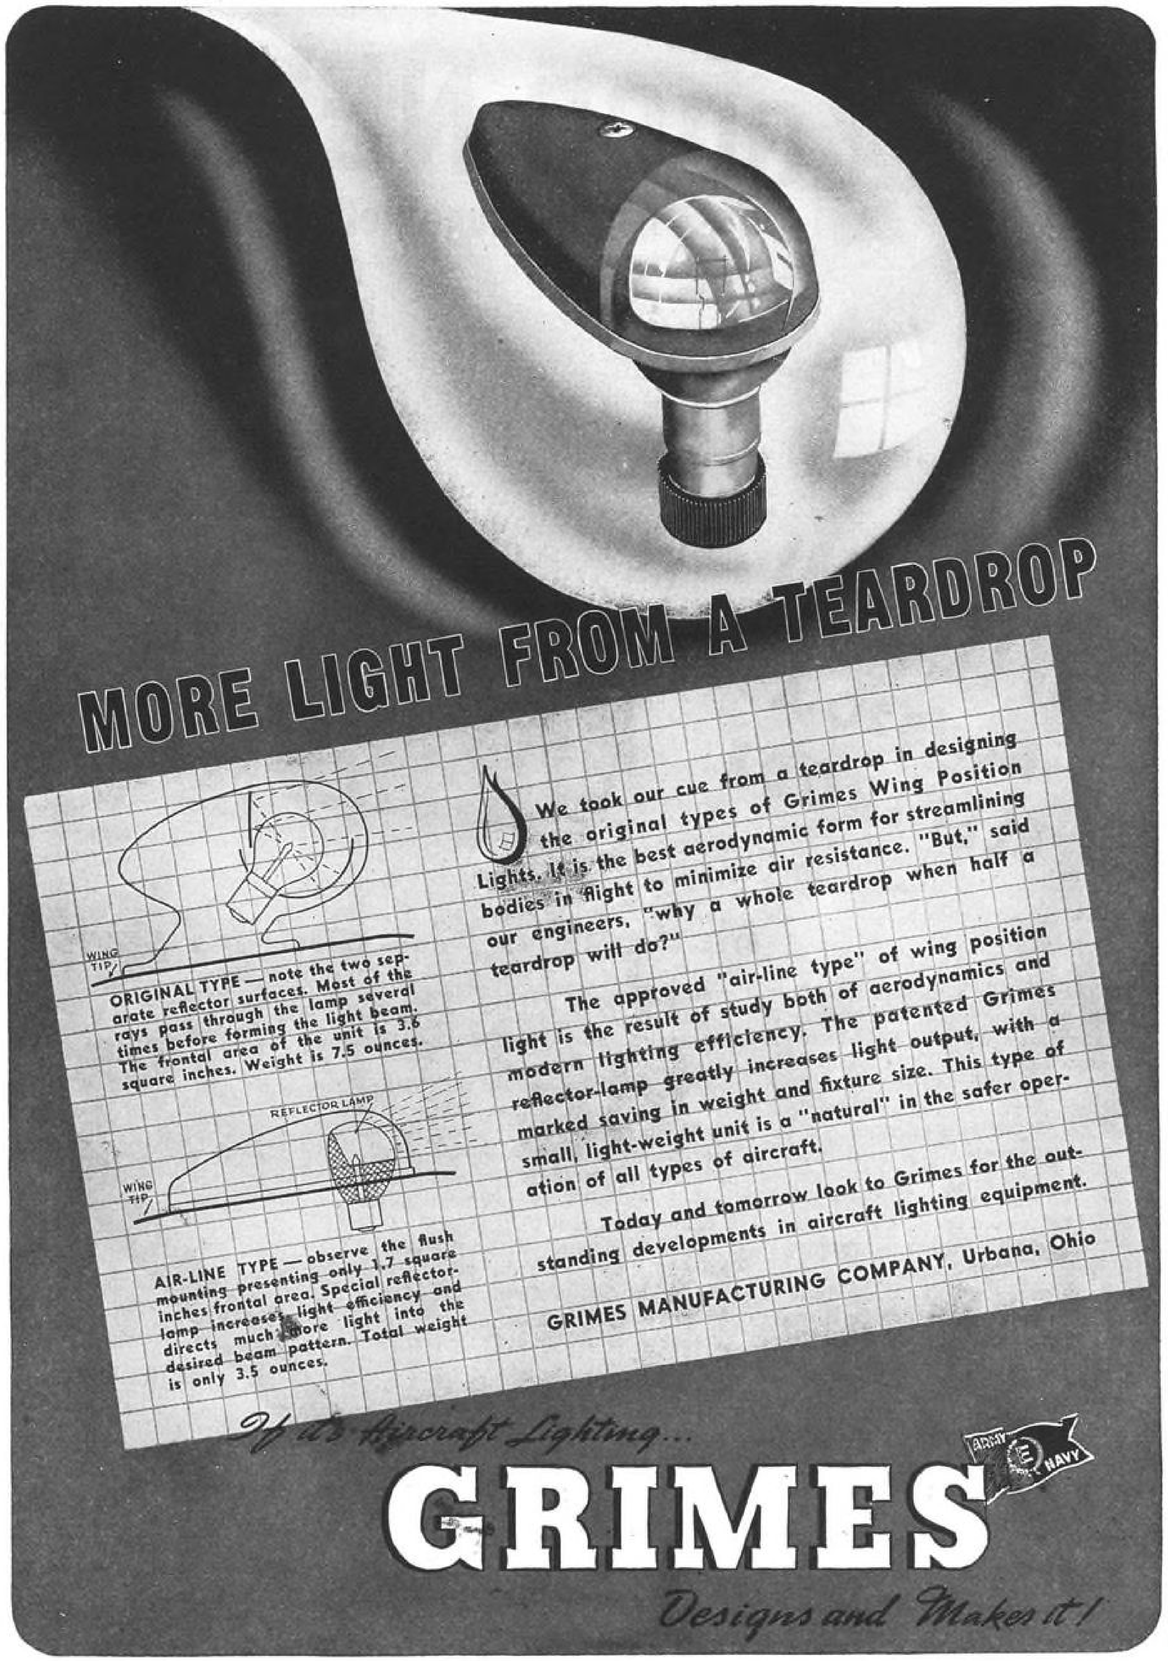

TO HELP YOUR METALLOGRAPHER TELL

"What is it?"

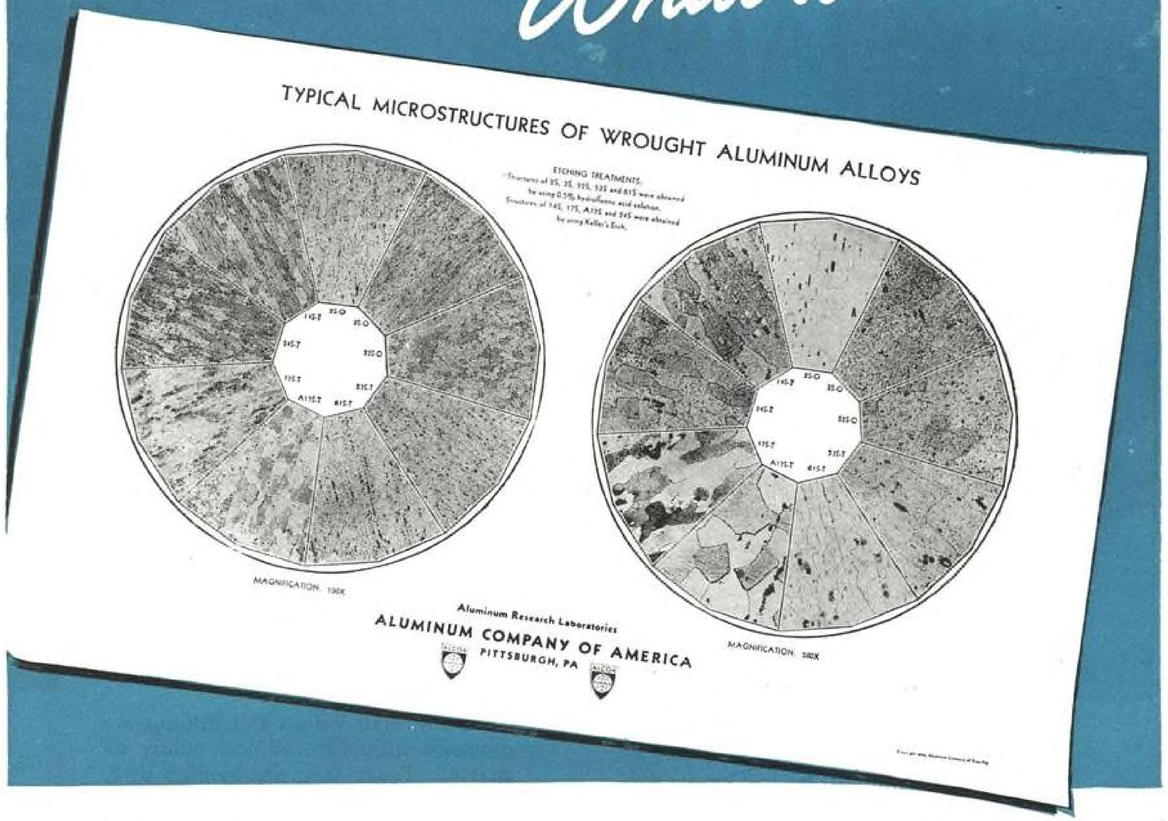

This chart shows typical microstructures of wrought aluminum alloys. Copies are available for your metallographer's use as a reference in identifying these alloys. It will help him answer such questions as these—

Has a product been correctly treated *or mistreated* during fabrication? What physical changes have taken place during casting, working and thermal treatment? How complete are those changes?

Chemical analyses and mechanical tests are of invaluable aid to the metallurgist in determining the composition and mechanical properties of metals and alloys. But these methods, alone or together, do not reveal the complete story. Metallographic analysis bridges that gap. The metallographer is able to delve into the past history of a metal or alloy and answer such questions as those above.

This chart pictures microstructures of alloys that have been *correctly treated*. It will help you establish proper production practices and is useful on routine checks during production. For a copy, write Aluminum Company of America, 2182 Gulf Building, Pittsburgh 19, Pennsylvania.

ALCOA ALUMINUM

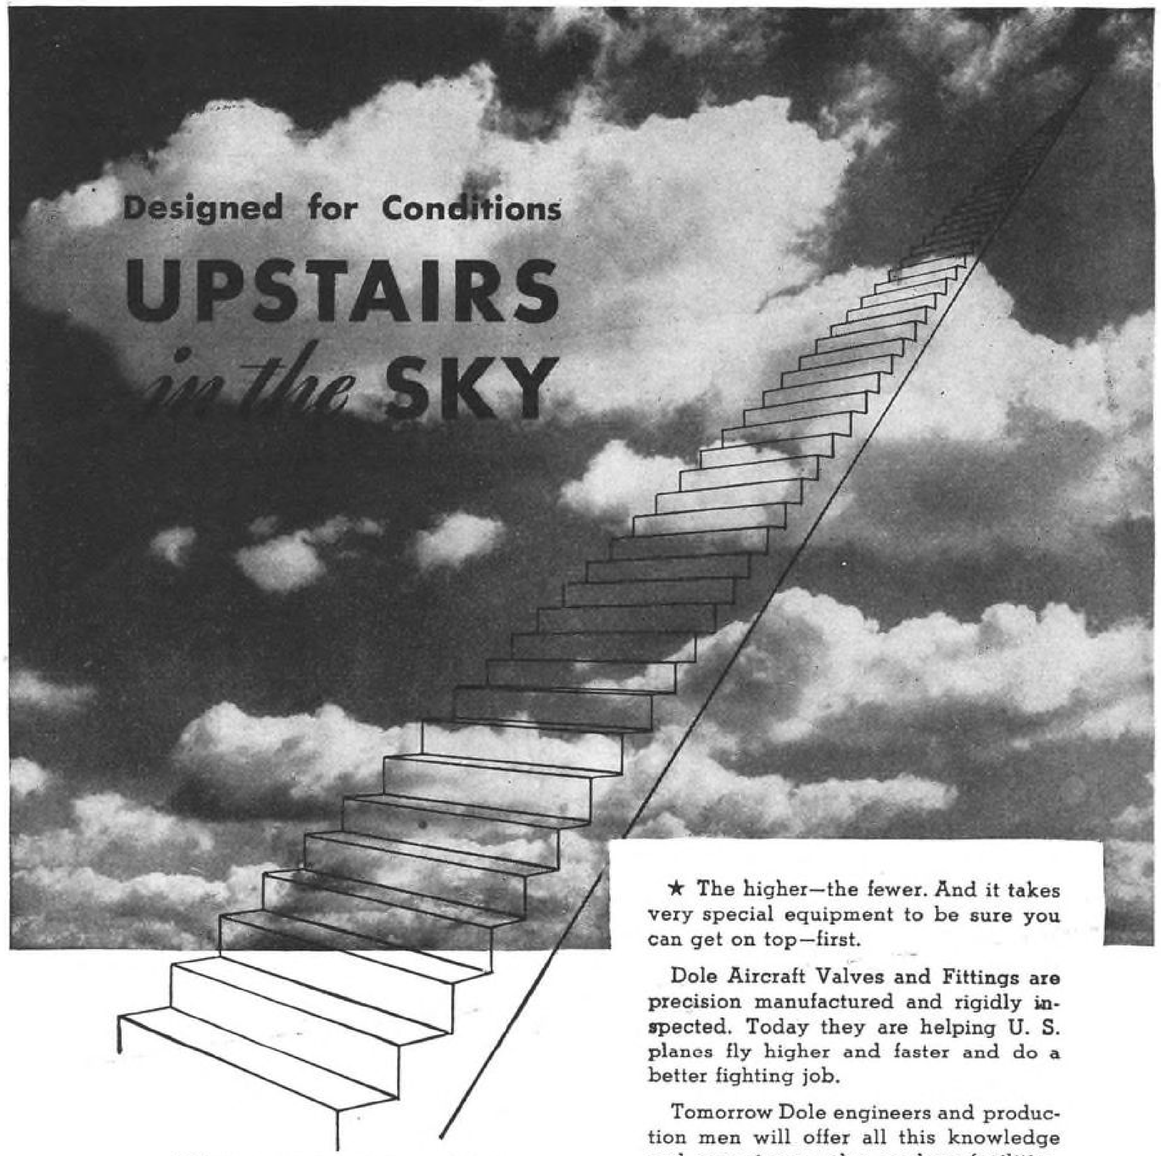

★ The higher—the fewer. And it takes very special equipment to be sure you can get on top—first.

Dole Aircraft Valves and Fittings are precision manufactured and rigidly inspected. Today they are helping U. S. planes fly higher and faster and do a better fighting job.

Tomorrow Dole engineers and production men will offer all this knowledge and experience, plus modern facilities, to help you solve your peace-time problems in aircraft and kindred industries.

Made in accordance with Army and Navy Aeronautical Standards

DOLE

THE DOLE VALVE COMPANY
Established 1906
1901-1941 Carroll Avenue, Chicago 12, Illinois
LOS ANGELES DETROIT PHILADELPHIA

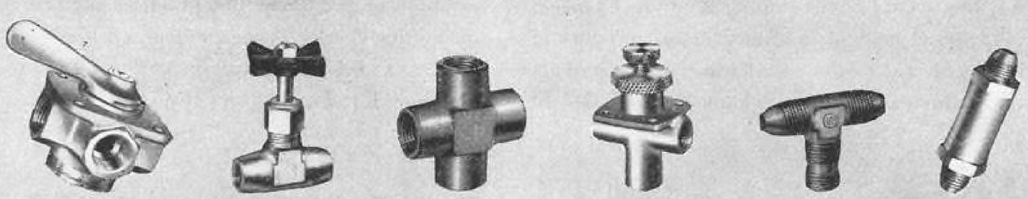

AIRCRAFT VALVES AND FITTINGS

The screw that's Built like a Gear

A sound engineering principle makes Bristo Multiple-Spline Socket Set Screws your safest recommendation for protection against vibration.

This screw can be set up tighter than any other... for the spline design *pulls* the wrenching force *inward,* not outward. It can be turned far beyond the point where an ordinary screw would burst or at least round out to stop effective wrenching. Yet a flick of the key will loosen it for quick removal!

Any assembly man will thank you for specifying Bristo. Assembly is easier, faster, especially when the fastening point is hard to reach—the splines in the screw cling to the splines on the wrench.

And the man who buys and uses your product will be grateful for the stronger fastening. Because Bristos—no matter how small (even down to the No. 4 wire size)—have greater strength, will hold more tightly, than other screws of comparable size.

TYPICAL APPLICATIONS

- cameras
- radio assemblies
- computing machines
- electric shavers
- scientific instruments
- x-ray machinery
- electric refrigerators
- motor assemblies
- vacuum cleaners
- domestic appliances

See THOMAS' REGISTER for more facts, list of product applications.
Remember Bristo for vibration conditions.

The BRISTOL Company
MILL SUPPLY DIVISION

BRISTO MULTIPLE SPLINE SOCKET SET SCREWS

Geared to the Key—for faster, easier, tighter setting

THE BRISTOL COMPANY, 152 BRISTOL ROAD, WATERBURY 91, CONNECTICUT

Newly Devised PRODUCTION SHORT CUTS... Provide PROMPT DELIVERY

A N 150
Turnbuckle Assembly
Fork

A N Part No.
AN150-16S
AN150-16L
AN150-32S
AN150-32L
AN150-46S
AN150-46L

A N 155
Turnbuckle
Barrel

A N Part No.
AN155-8S
AN155-16S
AN155-16L
AN155-32S
AN155-32L
AN155-46S
AN155-46L
AN155-61L
AN155-80L

A N 161
Turnbuckle Fork

U. S. ARMY AIR FORCE Part No.	*A N Part No.*
Air Force X43B2342-16LS	*AN161-16LS
Air Force X43B2342-16RS	**AN161-16RS
Air Force X43B2342-16LL	AN161-16LL
Air Force X43B2342-16RL	AN161-16RL
Air Force X43B2342-32LS	AN161-32LS
Air Force X43B2342-32RS	AN161-32RS
Air Force X43B2342-32LL	AN161-32LL
Air Force X43B2342-32RL	AN161-32RL
Air Force X43B2342-46LS	AN161-46LS
Air Force X43B2342-46RS	AN161-46RS
Air Force X43B2342-46LL	AN161-46LL
Air Force X43B2342-46RL	AN161-46RL

Furnished in Right and Left Hand Threads
*AN161L(S) S means Short Length — L Long Length
*AN161(L)S L means Left-Hand Thread
**AN161(R)S R means Right-Hand Thread

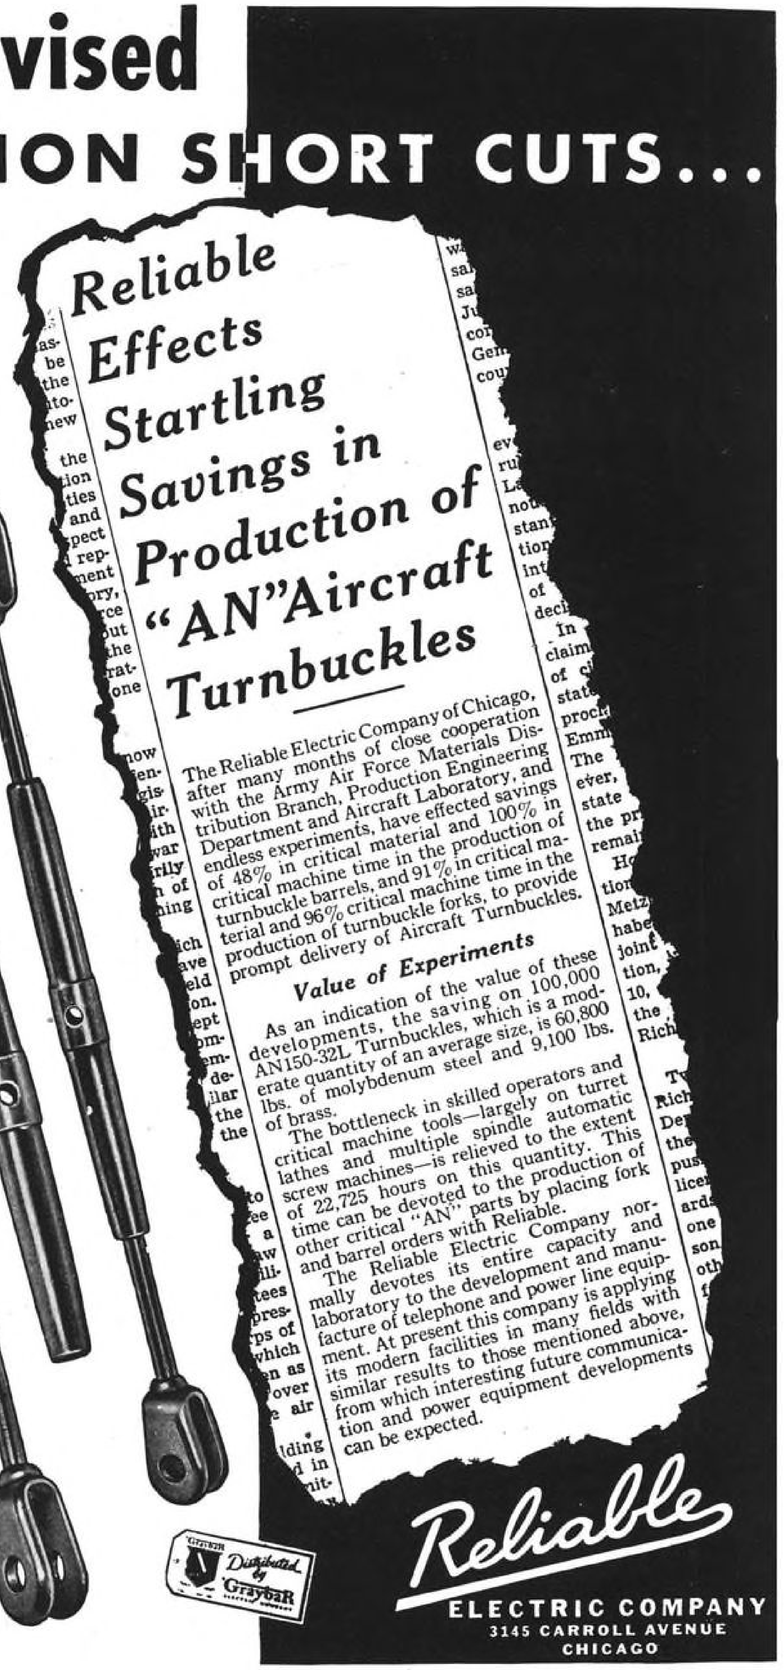

"HOW DOES MUEHLHAUSEN MAKE THOSE SUPER-SIZE SPRINGS?"

Well—it's this way. Those big babies must be coiled hot, to extremely close tolerances...and produced in quantity at P-38 speed. It's specialized work that demands very specialized equipment. So—Muehlhausen has one huge plant totally devoted to hot forming. It is all conveyorized. Production is governed by a central laboratory. The quenching tanks are the size of swimming pools, and skyscraper-like shot blasters give springs clean, lustrous finish and added life.

Automatic tapering of bar ends prior to coiling

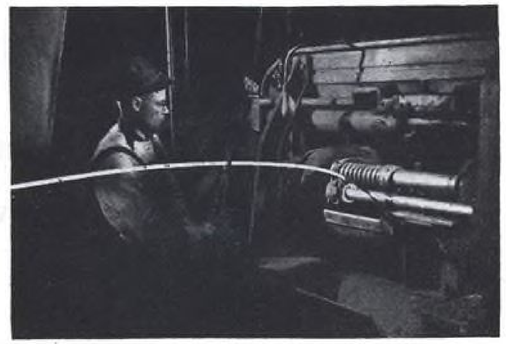

Precision hot-coiling springs on automatic equipment

Precision grinding squares both spring ends at once

Shipping finished springs in carload lots

To improve product performance, use

MUEHLHAUSEN Designed SPRINGS

To really appreciate how your production schedule and product can benefit by these extensive facilities, call Muehlhausen in on your next spring job. Write for new booklet on hot-coiling springs.

MUEHLHAUSEN SPRING CORPORATION
Division of Standard Steel Spring Company
740 Michigan Avenue, Logansport, Indiana

A field light is a relatively small part of an airport's equipment—but not small in importance.

Piston rings are relatively small, too. But not small in importance to aircraft engine manufacturers.

The world's finest piston rings are standard equipment for these world-famous aircraft engines—Allison • Wright • Packard-built Rolls-Royce • Franklin • Warner.

The Perfect Circle Companies

Hagerstown, Indiana • Richmond. Indiana • Newcastle, Indiana • Tipton, Indiana • Toronto, Ontario, Canada

Meet the ace of hydraulic fluid filters! It contains the new, improved micronic element—and its name, of course, is Purolator. Not the smallest particles can slip through its protection. Wing flaps, landing gear, bomb bay doors are safer than ever!

Small in size, light in weight, it operates under all weather conditions. Its filtering area has been greatly enlarged, and it meets all Army and Navy specifications. No one can ask for better filtration, nor need you be satisfied with less.

In addition to hydraulic fluid filters, Purolator also makes highly efficient air filters for vacuum operated aircraft instruments, and a complete line of lubricating oil filters. Write for Purolator's Aviation Catalog. Purolator Products, Inc., Founder and leader of the oil filter industry.

HOME OFFICE . . . . . *Newark 5, N. J.*
DETROIT OFFICE . . . . . *609 Fisher Bldg.*
CALIFORNIA OFFICE . *1401 S. Hope St., Los Angeles*

KEEP IT CLEAN with PUROLATOR
BUY MORE WAR BONDS AND STAMPS NOW!

This is the Screw-Locking Anchor Nut and Metal to Metal Rivet that is speeding Aircraft Production — Simplifying Modification and Repair Service

91⅔% Savings in Mounting Time

1 Drill *ONE* Hole

2 Insert LOK-SKRU

(Types with flat, flush, countersunk or spacer head. Sizes as required for metal thickness and hole diameter.)



3 Riveted securely by drawing sleeve against inner side of metal with special power or hand tool.



4 Attachment fastened by screw locked in anchor nut.

Disassembled LOK-SKRU with screw for attachments



Write for Folder

Handy information on the many uses and application of Lok-Skrus in airplane construction with data on types and sizes.

THE DILL MANUFACTURING CO.

FACTORY	BRANCH
700 East 82nd St.	1101 S. Flower St.
CLEVELAND, OHIO	LOS ANGELES, CALIF.

THE AVIATION STANDARD FOR SCREW-LOCKING ANCHOR NUT USES AND METAL TO METAL RIVETING

DILL *Lok-Skru* FASTENERS

POINTERS ON ENGINES . . . . . *No. 4 of a Series*

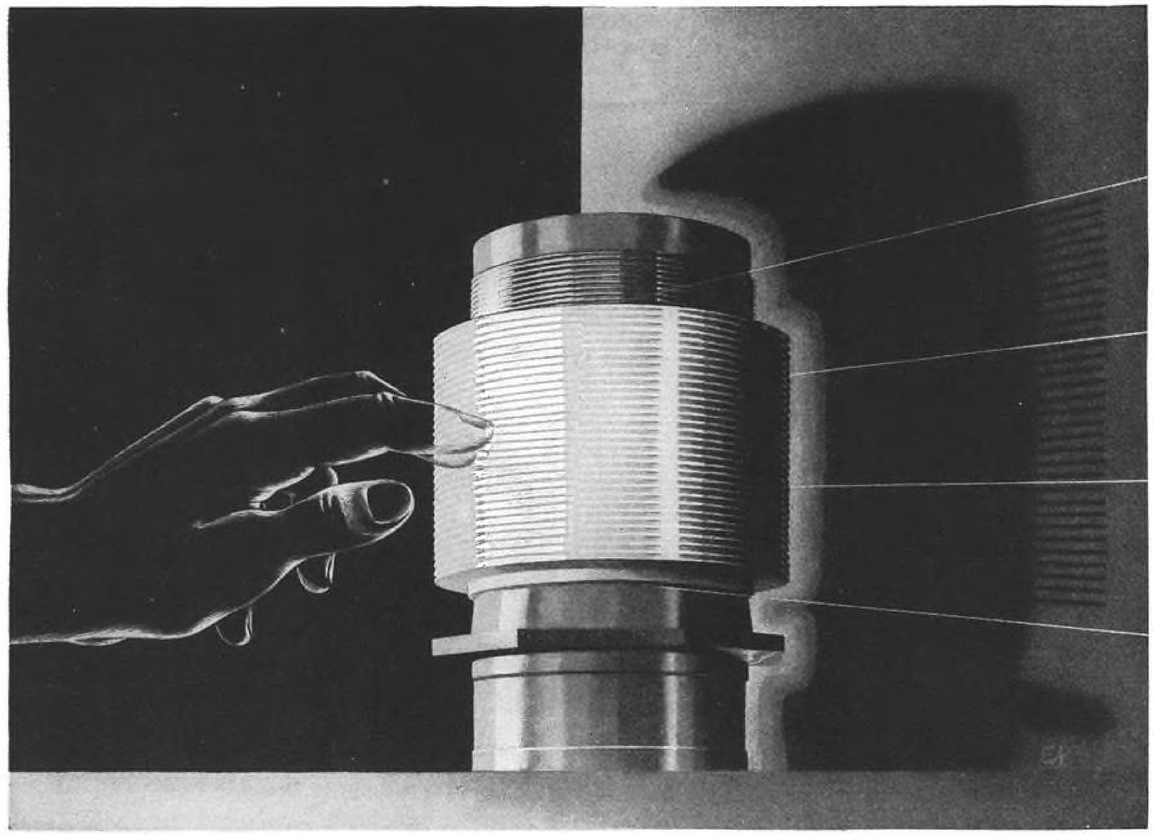

Off Comes the Lid of Aircooled Engine Power

A new and outstanding engineering development has come out of Fairchild's laboratories—a unique type of aircraft engine cylinder barrel that will enable American warplanes to fly farther, faster, and higher than ever before.

Heretofore, the power output of aircooled engines has been limited by the cooling capacity of fins tooled from the steel of the cylinder block—or of aluminum alloy fins merely *shrunk on* the cylinder barrel. The inefficiency of heat dissipation by these methods has long presented a problem for the best engineering minds of the world.

Now, by means of Fairchild's "Al-Fin" process*, a solution has been found. This revolutionary development makes it possible *chemically* to bond pure aluminum fins to the steel barrel to form an integral whole. The ferric-aluminum bond perfects the heat-conductivity at the point of contact. As a result, engine heat is drawn off much faster than by the methods previously employed.

Ranger 12s with "Al-Fin" cylinder barrels now produce more horsepower per pound of weight than other comparable engines.

The "Al-Fin" process is another example of the "touch of tomorrow" achieved by Fairchild engineering. A notable advance that helps build better warplanes today—as forerunners of better civilian planes tomorrow.

*All rights to the process are vested in Al-Fin Corporation, a wholly-owned subsidiary of Fairchild Engine and Airplane Corporation, and are available, under license, to others.

BUY U. S. WAR BONDS AND STAMPS

RANGER AIRCRAFT ENGINES
Division of Fairchild Engine and Airplane Corporation • Farmingdale, Long Island

How

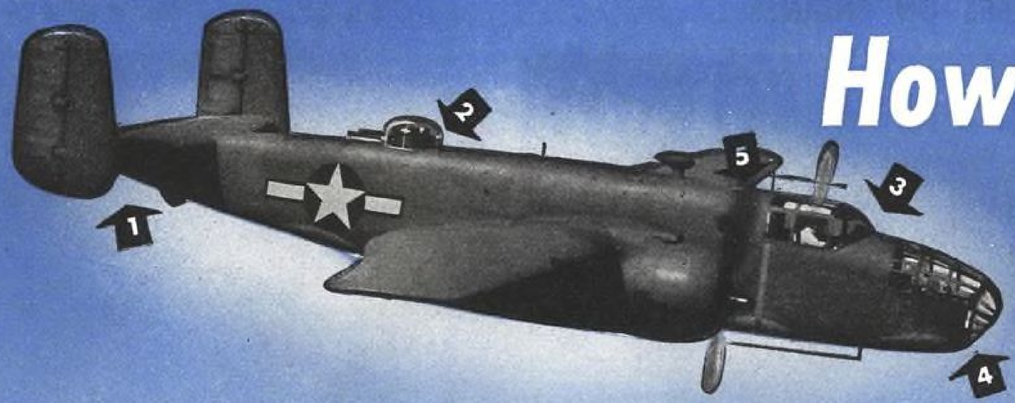

1 Tail cone of "Lucite" enables an observer to look back and check the result of a bomb-run over the target. Latest B-25 carries a machine gun at this tail position.

2 To give the turret gunner a clear view overhead and to each side, North American provides another enclosure of Du Pont "Lucite" here. Notice how few reinforcing ribs are needed for rigidity.

3 Pilot's enclosure in North American's Mitchell medium bomber is another multi-section structure in which all transparent portions except the windshield are "Lucite".

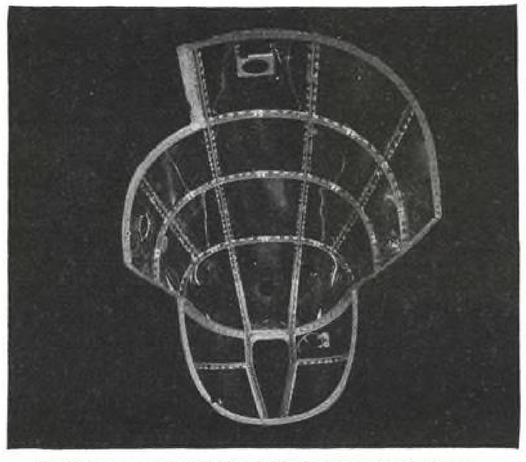

4 Twenty sections of "Lucite" are used in the bombardier's "greenhouse." At the upper left will be the escape hatch, not built integral with the enclosure. This enclosure has been changed on new "attack models" of the B-25 to accommodate a 75 mm. cannon.

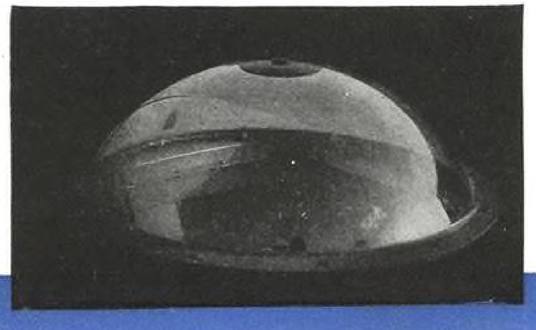

5 The astro-dome of "Lucite" in the B-25 lets the navigator shoot the sun and stars with almost all the clear vision of open air.

BETTER THINGS FOR

North American uses "LUCITE"

Applications of Du Pont "Lucite" Methyl Methacrylate Sheets in the Mitchell B-25

Like so many other plane builders, North American uses Du Pont "Lucite" methyl methacrylate sheets for enclosures in the Mitchell B-25 on the basis of several distinct advantages. First of these is the *transparency* of "Lucite"; in colorless sheeting as used in aircraft, "Lucite," even in thicknesses of several inches, absorbs less than 1% of visible light. This feature—plus remarkable sunlight and weather resistance, lightness, tensile and impact strength, satisfactory resistance to chemicals to which it is commonly exposed, and other properties—commends the use of "Lucite" in many aircraft applications.

A reprint edition of the helpful 114-page aircraft manual on "Lucite" is now on the presses. This manual gives detailed information on fabricating, forming, repairing, and general properties. If you'd like a free copy, write on your business letterhead. We'll be glad to reserve a copy in your name, and send it as soon as it's ready. Address E. I. du Pont de Nemours & Co. (Inc.), Plastics Department, Arlington, N. J., or 5801 So. Broadway, Los Angeles 3, Cal. In Canada: Canadian Industries, Ltd., Box 10, Montreal.

GENERAL PROPERTIES OF CAST "LUCITE" SHEETS

PROPERTY	
MECHANICAL	
tensile strength—psi	6,000–9,000
modulus of elasticity in tension—psi	3–5 x 10^5
elongation—%	1–5
compressive strength—psi	10,000–12,500
flexural strength—psi	10,000–14,000
impact strength, Charpy—ft-lb per in. of notch	0.4–0.6
Izod —ft-lb per in. of notch	0.2–0.4
hardness, Rockwell (load removed within 1 sec after fully applied, reading 30 sec later)	M-94
THERMAL	
coefficient of linear expansion—per °C (0°-21°C)	7–9 x 10^{-5}
thermal conductivity—	
cal per cm^2 per sec per °C per cm	4–6 x 10^{-4}
Btu per sq ft per hr per °F per in	1.5–2.1
softening temperature—°C (cantilever beam)	80
specific heat—cal per °C per g (0°-21°C)	
OPTICAL	
index of refraction—n_D	1.49—1.50
mean dispersion	0.0085
dispersive power	0.0174
light transmission—% (visible range, uncorrected for reflection)	90–92
ELECTRICAL	
volume resistivity—ohm-cm	greater than 10^{13}
dielectric contant, 60 cycles	3.5–4.0
10^3 cycles	
10^6 cycles	2.5–3.0
power factor—%, 60 cycles	6.0–7.0
10^3 cycles	
10^6 cycles	1.5–2.0
dielectric strength, short time—v per mil	
step-by-step—v per mil	
unpigmented stock (1/8" sample) will not track on arcing	
MISCELLANEOUS	
specific gravity	1.18–1.20
specific volume—cu. in. per lb.	24–23
water absorption—% by wt, 24 hrs immersion	0.2–0.3
tendency to cold flow	slight
burning rate	very slow
effect of age	practically none
effect of sunlight	practically none
effect of metal inserts	none
chemical resistance	Unaffected by weak acids, weak alkalis. Attacked by strong acids and strong alkalis. Soluble in lower ketones, esters.

"Lucite" sheeting for transparent airplane enclosures meets U. S. Navy Aeronautical Specification P-41c, Grade A, and U. S. Army Air Corps Specifications 94-12014B.

NOTE: Maximum and minimum values are given. Compositions can be prepared having specific properties within the range indicated. However, maximum values for one property cannot always be obtained without sacrifice in another. Samples are conditioned at 77°F. and 50% relative humidity, unless otherwise specified.

DU PONT PLASTICS

BETTER LIVING . . . *THROUGH CHEMISTRY* DU PONT REG. U.S. PAT. OFF.

Achievement

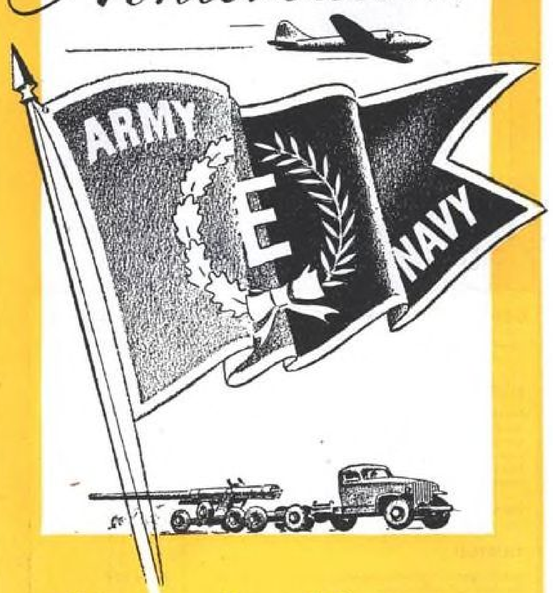

that challenges future effort

Promises are just promises unless kept; but performance is history That's why we are proud of our Army-Navy "E" award. It expresses Uncle Sam's recognition of our contribution to this nation's production record . . . a performance that will live in history. As such, our "E" is not only a symbol of a vital job well done but an inspiring challenge to the men and women of General Controls. ★ We pledge ourselves to continue giving our best, and more, to produce Automatic Controls for America's needs. Today, tomorrow and until "V" Day, we will continue to earn our "E" by *performance.*

hi-g
GENERAL CONTROLS

Wartime Manufacturers of Electro-Magnetic and Temperature Controls for Aircraft

Peacetime Manufacturers of Automatic Pressure Temperature, and Flow Controls

801 ALLEN AVENUE, GLENDALE 1, CALIFORNIA

BOSTON • NEW YORK • PHILADELPHIA • DETROIT • CHICAGO
CLEVELAND • DALLAS • DENVER • SAN FRANCISCO • ATLANTA

No. 4 in a Series of Factors Essential to Maximum Brush Efficiency

. . . proper adjustment and maintenance is essential to good brush operation



Motors and Generators are usually delivered by the manufacturer with brushes properly installed and adjusted to the correct operating position.

Time, long and severe service, abnormal loads and tough application requirements exact their toll.

Even the best of brushes cannot function efficiently without maintenance and adjustment. Continued good operation requires the spring pressure to be maintained as the brush wears, the brushes and holder be kept clean of dust and dirt, and commutators kept in good condition.

Long life Morganite brushes require a minimum of maintenance and it is wiser to spend minutes checking Morganite brushes than hours changing inferior brushes.

Whether your problems involve main or auxiliary drives in motors, generators, or dynamotors, Morganite can offer data and recommendations to safeguard satisfactory brush service, write

MORGANITE BRUSH CO., Inc.
Long Island City 1, New York

TRADE MARK

MORGANITE BRUSHES

Send for this Booklet

It Will Be of Interest—and may suggest new applications—to design engineers, production and maintenance men, and to oxy-acetylene process supervisors.

• Ask for "Linde Oxy-Acetylene Processes." It briefly describes some of the oxy-acetylene metal-working methods that the Linde organization makes available to speed up production and construction programs, to lower operating costs, and to simplify problems of maintenance and repair. It also shows the catalogs that you can obtain to aid in your selection of the apparatus and supplies needed for applying these processes.

BUY UNITED STATES WAR BONDS AND STAMPS

THE LINDE AIR PRODUCTS COMPANY
Unit of Union Carbide and Carbon Corporation
30 East 42nd Street UCC New York 17, N. Y.
In Canada: Dominion Oxygen Company, Limited, Toronto

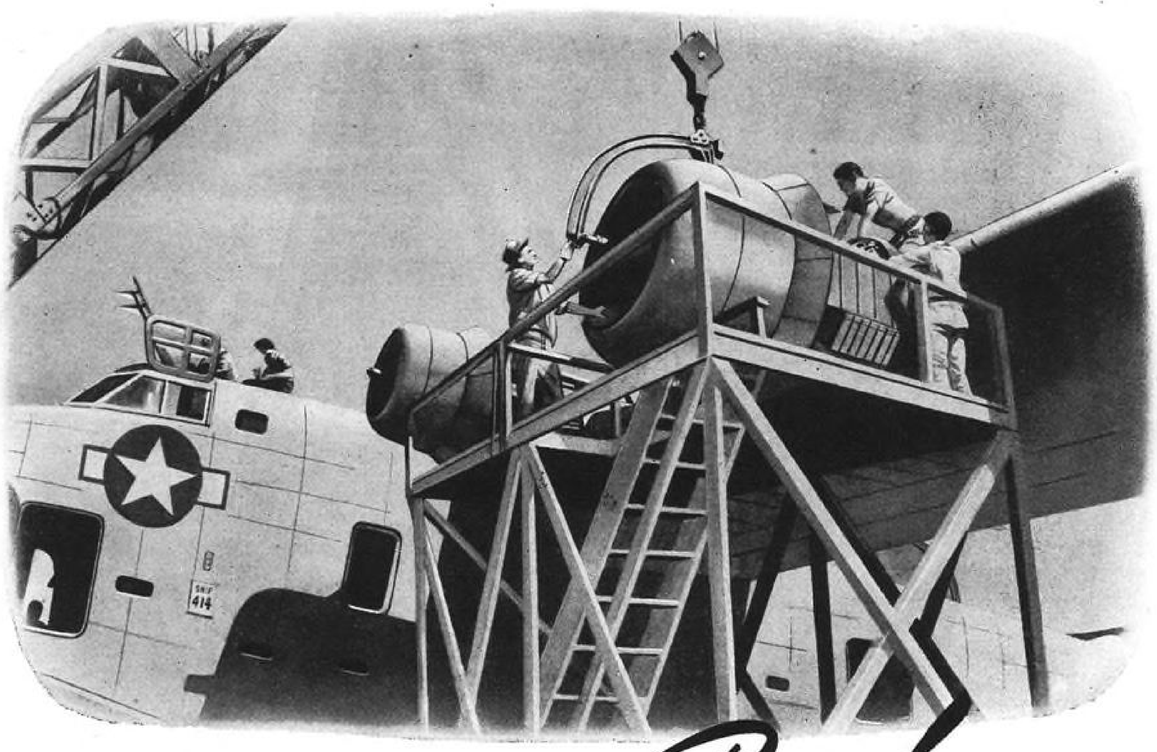

Platform for Peace!

Every plane off the assembly line is another plank in the platform for peace. More planes now to hasten the hour of victory. More planes then to guard the peace and fly the commerce.

America surges into the era of flight with many new names carrying the flag. ROHR is one of them . . . a name which means long lines of sleek motors assembling into completed power plants . . . thousands of men and women Production Fighters, trained in special skills to speed giant Liberators and fleet Lightnings into the blue . . . an engineering skill that has reduced intricate tasks of bomber and fighter production to save thousands of man hours. Rohr works now for victory and nothing else, but stands ready to play a full part in the winning of the peace.

ROHR AIRCRAFT CORPORATION

Make war bonds your platform for future security

HELPING TO WRITE THE STORY OF TOMORROW

CHULA VISTA, CALIFORNIA

GRATON & KNIGHT ENGINEERS *Present* PACKINGS POINTERS

No. 7

Reprints of each article in the series, including additional information, are available, free. Write to Packings Department D, Graton & Knight Company, Worcester 4, Mass.

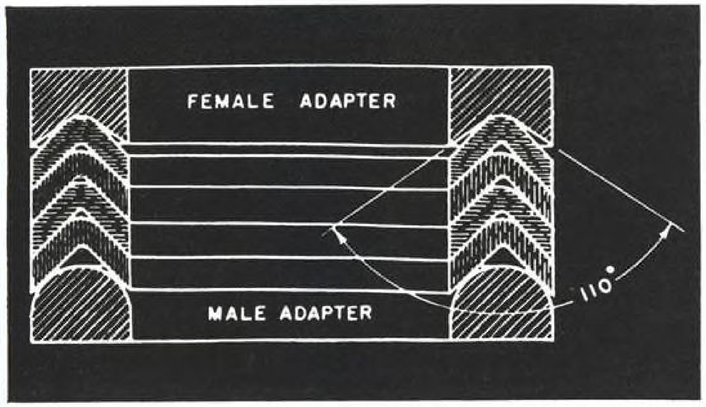

Adapter Rings for Leather Vee Packings

METAL ADAPTER RINGS

The use of metal adapter rings insures a completely self-sealing packing. A 110° included angle on the female adapter compensates for nesting and leaves room for the 90° angle Vees to open as the pressure acts on them. A radius on the male adapter (one half the cross-section) puts the initial sealing pressure in exactly the right place to open the Vees as needed.

Friction will only be in proportion to the pressure applied, and there will be no need of gland adjustment once the gland has been tightened just enough to get the initial seal (usually hand-tight is sufficient). When in operation, the Vees will actually float in the packings recess, as the bottom adapter ring will not be in contact after the pressure has been on for a short time.

This type of support is permanent: barring unusual wear on the metal adapters, replacement is unnecessary.

Leather Adapter Rings

Leather adapters can be supplied when complete set of packings and adapters is required from one source. However, for proper support we recommend metal adapters unless time and manufacturing facilities preclude their use.

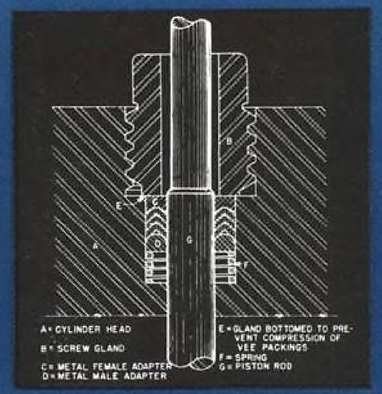

SPRING-LOADING

Spring-loading is usually recommended for low pressure applications in order to maintain constant light tension against the Vees, keeping them in contact with the piston and the sides of the packing recess or the cylinder. Spring-loading is always from the male adapter side, the spring acting against the male adapter.

Care should be exercised in designing springs so that the spring cannot rub against the reciprocating piston rod or the cylinder.

Refer spring-loading applications to Graton & Knight Engineers

Spartan Leather Packings

Graton & Knight's SPARTAN has highest resistance to abrasion and heat (withstands boil test), is unaffected by common pressure mediums, and will not dry out hard and brittle. It also has exceptional tear and tensile strength.

When your design reaches the "packings point" — or when packings trouble occurs — call on G & K engineers.

World's Largest Manufacturer of Industrial Leather Products

SPARTAN ENGINEERED PACKINGS

GRATON & KNIGHT COMPANY

Worcester 4, GRATON AND KNIGHT Massachusetts

You may find the answer to Your $1,000 Question!

Q Are your machines capable of "M. P. T"?*

A Not if your machines are stopped too long or too often for lubrication. For instance: Alemite Lubrication Specialists showed a manufacturer how to add 6½ hours production a week to each of a battery of lathes. Lubrication time was cut from 18 minutes per lathe per shift to 1 minute every 6 days—without stopping machines. Checked your lubrication time lately?

*More Productive Time

Q Are you using too many lubricants?

A Could be! One manufacturer was amazed and money ahead when Alemite Lubrication Specialists showed him how to cut the number of required lubricants from 41 to 16 through a modernized set-up. Time, money, and manpower were saved. Results were far better. No bearing failures due to improper lubrication. How many lubricants do you need?

Q Is every bearing on your machines getting proper lubrication?

A Before you answer, listen to this: In one plant, Alemite Lubrication Specialists discovered 17 plugged lubrication inlets in a battery of machines. Seventeen bearings that weren't being lubricated! A close call that could have cost plenty. But the complete, thorough Alemite service remedied the situation in the nick of time, forestalling an inevitable breakdown.

Yes! "LUBRI-*chaos*" Can Cost You Money, Machines and Production!

"Lubri-*chaos*" is an affliction found in many of the best managed plants. It took the war and stepped up production schedules to spotlight it. But Alemite, as the pioneer in pressure lubrication, has crusaded for years to remedy this costly evil. Today, the modern Alemite method of handling and application of lubricants is recognized as the answer to "Lubri-*chaos*" and is proving its worth in war plants all over the nation.

Tomorrow, when post-war competition makes new demands on industry, the Alemite method will play a vital part in production. That is why plant managers and operators with an eye to peace-time markets are getting together with Alemite Lubrication Specialists to gain the competitive advantage of the world's most modern lubricating methods. Alemite, 1865 Diversey Parkway, Chicago 14, Ill., or Belleville, Ontario.

WANTED
Tough Job by Man with "MML" Degree!

This man, an Alemite Lubrication Specialist, is a "Master of Modern Lubrication." His technical training and experience equip him to consult with you about applying the most modern lubricating methods. He has added more productive time to machines, saved lubricants and manpower.

He's ready to go to work for you now, backed by the world's most experienced organization in the handling and applicaion of lubricants. Call him. Or, if you prefer, write, wire or phone for his address.

ALEMITE
First in Modern Lubrication

CONSULTATION • ENGINEERING • EQUIPMENT • LUBRICATION • MAINTENANCE

A Gear ~~CHAIN~~ IS ONLY AS STRONG AS ITS WEAKEST ~~LINK~~ tooth

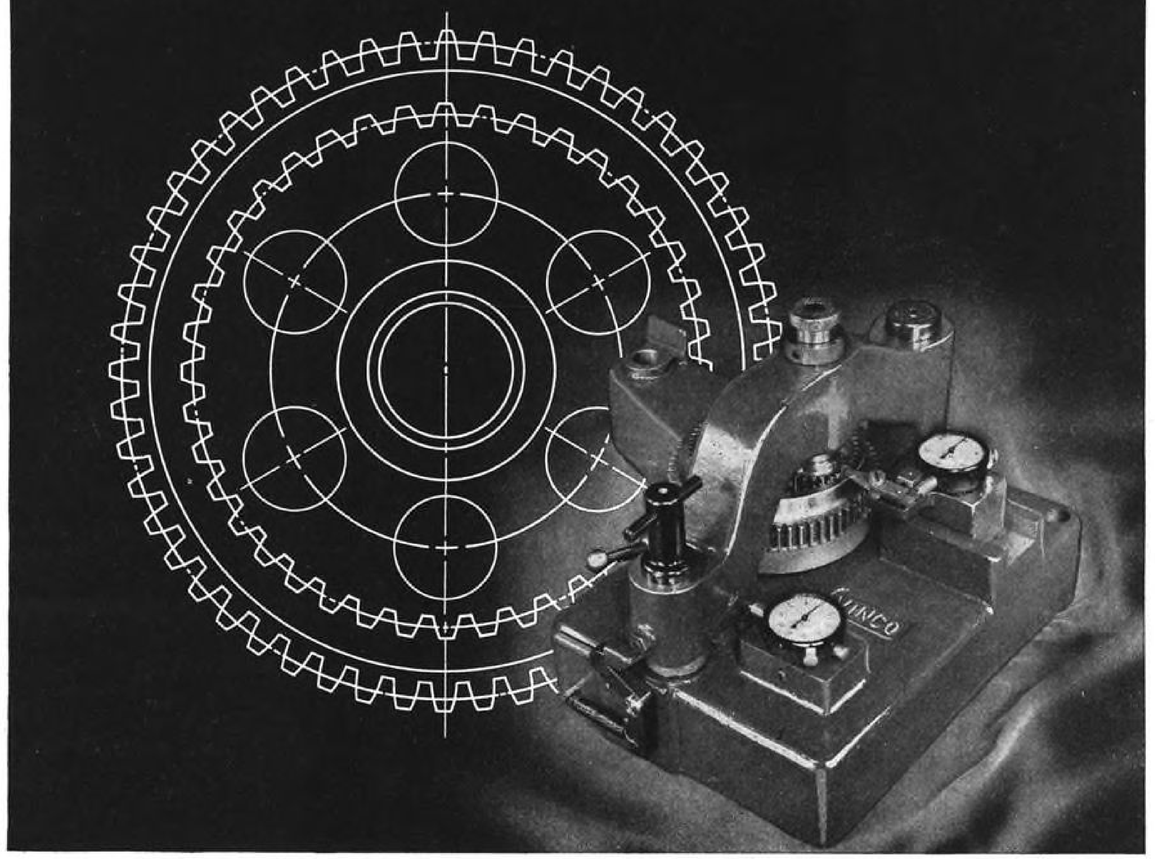

Appropriate apologies for paraphrasing an old proverb! But isn't it the truth?

There is no provision today for error. There is too much at stake. Highly mechanized warfare staged against a bitter, ruthless enemy demands a constant flow of war machines, flawless in construction and exact in every detail. Gears furnish the vital motive power for these engines of destruction—gears decide whether we can out-shoot, out-fly or out-maneuver the enemy. That is the gear maker's responsibility.

VINCO also has a responsibility: to provide speedy, accurate methods of checking the various phases of gear production. VINCO GEAR ROLLING FIXTURES, VINCO MASTER GEARS and the VINCO INVOLUTE CHECKER are doing a masterful job in helping to maintain peak gear production.

The above insert is a Vinco Gear Rolling Fixture designed to check backlash and run-out on an internal gear—one of hundreds of specially designed gear rolling fixtures that are proving invaluable aids to leading manufacturers in maintaining a high production of precision gears.

VINCO CORPORATION
8865 SCHAEFER HIGHWAY - - DETROIT 27, MICHIGAN

SALES OFFICES
NEW YORK and CHICAGO

MILLIONTHS OF AN INCH FOR SALE BY VINCO

Semi-Automatic Hydraulic Spline and Gear Grinder • Optical Master Inspection Dividing Head • Involute Checker • Angle Tangent to Radius Dresser • Index Plates • Precision Vises • Sine Bars • Straight-side Spline, Serration Spline, Involute Spline and Helical Spline Plug and Ring Gages • Thread Plugs, Rings and Setting Plug Gages • Spur and Helical Master Gears • Munition Gages • Propeller Hub Gages • Built-up and Special Gages • Gear Rolling Fixtures • Spline and Index Fixtures • Hydraulic Power, Control, Utilization and Distribution Units • Engineering, Design and Development.

Albanene

REG. U. S. PAT. OFF.

the Stabilized

TRACING PAPER

★**STABILIZED** to keep its toughness and transparency — that's Albanene Tracing Paper. Because it is treated with crystal-clear Albanite, a new synthetic solid developed in the K&E laboratories—Albanene will not oxidize, become brittle or lose transparency with age. Albanene's improved drawing surface takes ink or pencil fluently, erases with ease . . . Ask your K&E dealer.

TRADE MARK K+E

KEUFFEL & ESSER CO · *Est. 1867*

CHICAGO · NEW YORK · HOBOKEN, N. J. · MONTREAL
ST. LOUIS · SAN FRANCISCO · LOS ANGELES · DETROIT

Aluminum Die-Cast MICRO SWITCH Housings . .

Type "H" housing with short sealed plunger, providing 3/8" overtravel, angle conduit fitting. Overall size, 1" thick, 3 15/16" high, 4 3/8" wide. Net weight, less switch, .272 pounds. Illustrated is right hand housing with mounting ears.

The Type R-31, with pin plunger, as shown above, is the simplest form of Micro Switch for use in electrical controls in aircraft. The Type R-31 has been successfully used on thousands of aircraft installations which include all types of fighters, bombers, transports, commercial and private planes. Size 1/16" wide, 1 17/64" high, 1 15/16" long. Weight .067 pounds.

This left hand "H" housing has long plunger, providing 3/8" overtravel, tapped mounting holes, straight, threaded conduit fitting. Overall size, 1" thick, 3 3/32" high, 4 3/8" wide. Weight, less basic Micro Switch, .24 pounds. This long overtravel can be provided with a bellows seal. Type "H" housings and Micro Switch units are supplied as separate items. They can be assembled at the factory, or easily assembled in the field.

Type "H" housings, with variations in actuating plungers. Plunger shown provides 3/8" overtravel. They are also provided with a selection of straight or adjustable angle conduit fittings with 3/4"—20 or 11/16"—24 A-N threads; or 29/64" hole for open wiring. Overall size, 1" thick, 2 11/16" high, 2 25/32" wide. Weight, less basic Micro Switch, .227 pounds.

AFFORD MECHANICAL PROTECTION, CONDUIT CONNECTION, SEALING AND RADIO SHIELDING . .

Designed by aircraft engineers, the Type "H" Micro Switch Housings illustrated here are used with the Type R-31 basic Micro Switch with regular pin plunger.

Micro Switches have been generally adopted by the aircraft industry because they are light, small, dependable, precise and have high electrical switching capacity. The characteristics of the Type R-31 basic Micro Switch have been worked out with the cooperation of engineers throughout the entire industry, as well as the Army Air Corps and the Navy Bureau of Aeronautics. The R-31 is an accepted standard switch and is stocked at all Air Depots.

Micro Switch provides a wide variety of housings and actuators to meet varying conditions on airplanes, as developed by different manufacturers. These housings and actuators become parts of the planes and require no deviation permit. They are all built to use the standard Type R-31 Micro Switch for ready field replacement.

Micro Switch Corporation,
Freeport, Illinois
Branches: 43 E. Ohio St., Chicago (11)
11 Park Pl., New York City (7)
4900 Euclid Ave., Cleveland (3)
1709 W. 8th St., Los Angeles (14)
Sales & Engineering Offices:
Boston · Hartford

BUY ALL THE BONDS YOU CAN



Open view of the Type R-31 Micro Switch shows the three-bladed, beryllium copper spring construction. Adaptation to the requirements on aircraft incorporates contact separation of .070" which satisfactorily interrupts highly inductive loads under conditions of extreme altitude. Knurled contact surfaces insure positive operation on extremely small loads and minimize transfer of contact material on D.C. operation.

The trademark MICRO SWITCH is our property and identifies switches made by Micro Switch Corporation

MICRO MS SWITCH

Made Only By Micro Switch Corporation . . . Freeport, Illinois, U.S.A.

SCHATZ *Precision* Aircraft Ball Bearings

Courtesy of
DOUGLAS AIRCRAFT CO., INC.

ON THE CONTROLS OF AMERICAN FIGHTING PLANES, SCHATZ AIRCRAFT BALL BEARINGS SUSTAIN THEIR REPUTATION FOR PRECISION PERFORMANCE.

STRONG • STURDY • ACCURATE

MADE BY BALL BEARING SPECIALISTS WITH YEARS OF EXPERIENCE IN THE MANUFACTURE OF FINE CONTROL BEARINGS FOR AIRCRAFT SERVICE.

THE SCHATZ MANUFACTURING CO.
POUGHKEEPSIE, N. Y.

REPRESENTATIVES LOCATED AT
Detroit: 2640 Book Tower • Cleveland: 402 Swetland Building
Chicago: 902 S. Wabash Ave. • Los Angeles: 5410 Wilshire Blvd.

"They're coming along fine

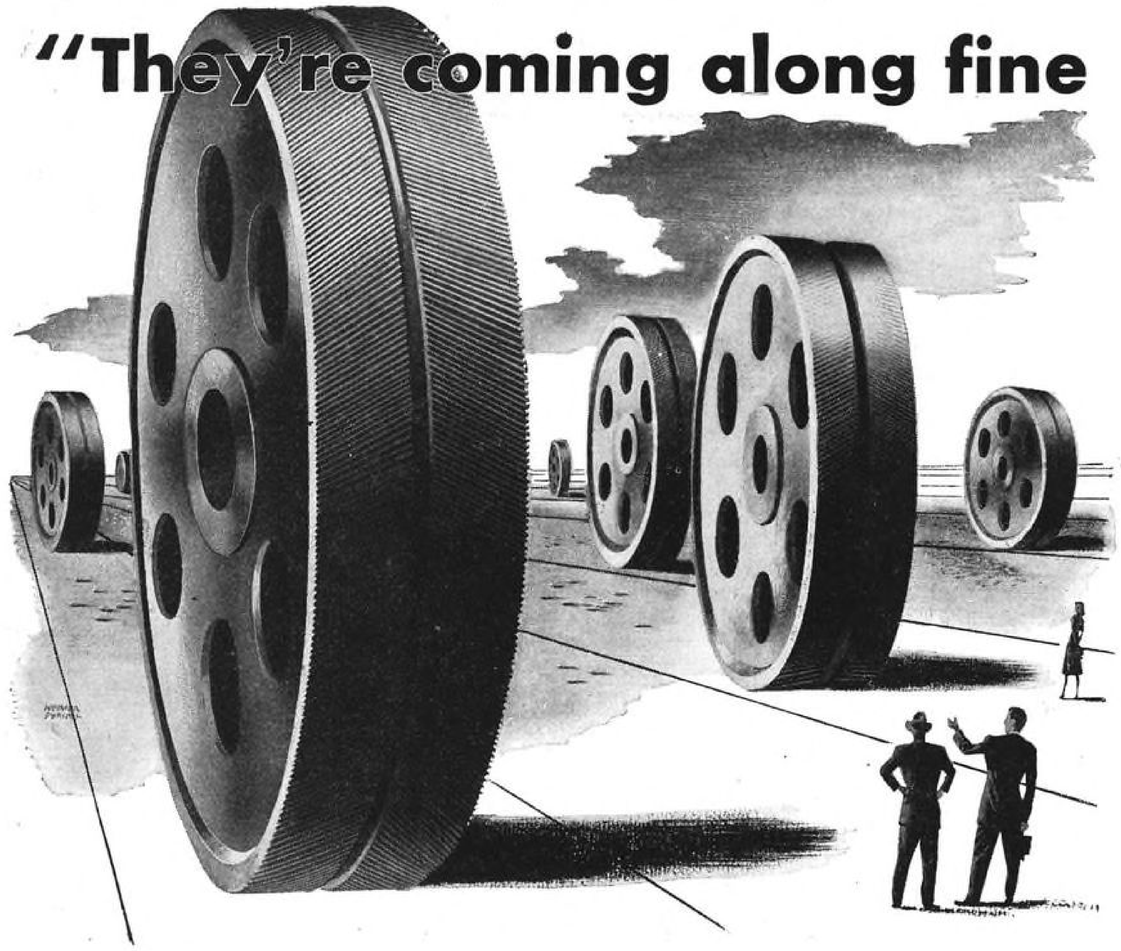

. . . but a light frost would ruin the whole crop!"

There's one critical period in the manufacture of huge herringbone gears for U.S. cruisers and destroyers when any marked change in temperature—whether heat wave or light frost—might send them to the scrap pile instead of into the fight.

You see, it takes many days to cut teeth for one of these big propulsion gears. And work done in the last hour must be as accurate in results as the very first cut. If, somewhere in the process, a temperature change causes uncontrolled expansion or contraction of the metal, it becomes impossible to maintain uniform precision.

In this case, G-E *air conditioning* and *industrial refrigeration* team up to keep production humming—regardless of weather. Air conditioning maintains uniform temperature in the cutting room. Industrial refrigeration cools the cutting oil. Together they eliminate the temperature hazards and permit precise matching of gears.

For exacting applications like these, General Electric has developed efficient and dependable air conditioning and refrigeration equipment that provides accurate control of temperature and humidity. Available for war production uses now . . . it will be available for all uses after the war.

☆ BUY WAR BONDS ☆

General Electric Company, Air Conditioning and Commercial Refrigeration Divisions, Section 444, Bloomfield, New Jersey.

Air Conditioning by
GENERAL ELECTRIC

Hear the General Electric Radio Programs: The "G-E ALL-GIRL ORCHESTRA", Sundays, 10 p. m., E W T, N B C . . . "THE WORLD TODAY" News, Every Weekday 6:45 p. m. E W T, C B S

TOP COVER . . .
for Attack at Dawn!

As dawn comes, lean, snarling pursuit planes roar through a lightening sky to become protective patrol above ground operations. It is "top cover" to shield the men below from air-assault, or to blast in low, screaming dives enemy installations that are blocking the advance.

The ever present, Hallicrafters-built SCR-299 Mobile Radio Communications Trucks are often the means of directing the "top cover." Operating under any conditions, these Giants of Military Radio, whether calling for "top cover" or directing the fire of artillery, "get the message through."

BUY MORE BONDS!

hallicrafters RADIO

THE HALLICRAFTERS COMPANY, MANUFACTURERS OF RADIO AND ELECTRONIC EQUIPMENT, CHICAGO 16, U.S.A.

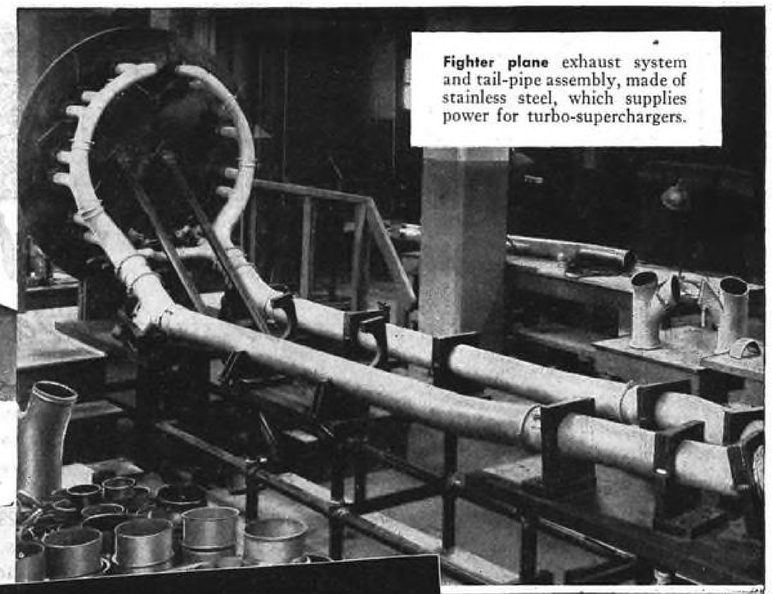

Fighter plane exhaust system and tail-pipe assembly, made of stainless steel, which supplies power for turbo-superchargers.

Raising Ceilings WITH STAINLESS STEEL

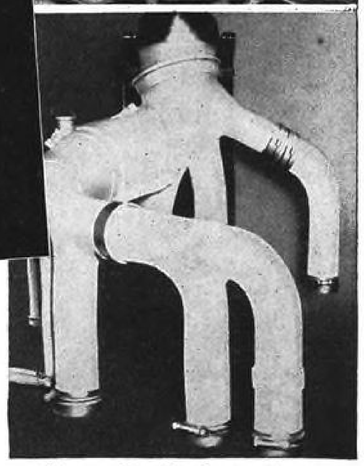

This complicated exhaust system demonstrates the extreme workability of versatile stainless steel.

WHEN the engines of our speedy fighters needed more air—to maintain their rated power at 40,000 feet — stainless steel played an important part in furnishing an ample, constant supply.

Powered by exhaust gases from the engines, the unfailing efficiency of turbo-superchargers depends upon the handling of those gases, at high pressure and temperature, by exhaust systems and tail-pipe assemblies made of stainless steel.

Temperatures in tail-pipe assemblies run as high as 1200°F. But the light, rigid, durable U·S·S Stainless Steel developed by our metallurgists retains the strength needed for this high-pressure job at 1650°F.

When it was necessary to restrict the aviation industry's use of alloy steels to "critical applications," the use of stainless steel was directed for parts exposed to high temperatures and severe corrosive conditions. Our metallurgists then worked out formulas which observed government restrictions, yet preserved the characteristics needed to meet airplane engineers' requirements, with U·S·S Stainless Steels.

As similar problems arise in your effort to maintain leadership in your field, it will be worth your while to know all the ways in which U·S·S Stainless Steels can serve you. Our stainless steel technicians will be glad to consult with you regarding the use of U·S·S Stainless Steels, for critical applications, in your products.

UNITED STATES STEEL

U·S·S STAINLESS STEEL

SHEETS · STRIP · PLATES · BARS · BILLETS · PIPE · TUBES · WIRE · SPECIAL SECTIONS

AMERICAN STEEL & WIRE COMPANY, *Cleveland, Chicago and New York*
CARNEGIE-ILLINOIS STEEL CORPORATION, *Pittsburgh and Chicago*
COLUMBIA STEEL COMPANY, *San Francisco*
NATIONAL TUBE COMPANY, *Pittsburgh*

United States Steel Supply Company, Chicago, *Warehouse Distributors*
United States Steel Export Company, New York

THERE is everything to be said about having exactly the right wheel on any kind of a cylindrical grinding job—and on every grinding job!

This is an all important factor in getting higher production and greater precision.

Proper wheel selection also reduces grinding time, lowers wheel and grinding costs, makes certain of getting a desired finish.

Carborundum abrasive engineering service certainly can be of decided help in getting these results—in your getting the best and the most out of your grinding wheels. This service we feel can be of great value to you. We suggest you take advantage of it.

Incidentally, we have quite a library of helpful booklets on Tool Room Grinding. Roll Grinding, The Grinding of Cemented Carbides, Common Grinding Faults and Their Correction, etc. Copies sent on request. The Carborundum Company, Niagara Falls, New York.

Sales Offices and Warehouses in New York, Chicago, Philadelphia, Detroit, Cleveland, Boston, Pittsburgh, Cincinnati, Grand Rapids

Grinding Wheels by CARBORUNDUM TRADE MARK

(Carborundum is a registered trade-mark of and indicates manufacture by The CarborundumCompany)

A New Weapon — The "BLACK WIDOW"

The Northrop P-61 "Black Widow" is a new warplane that will play its part in the present all-out push for victory.

As the Army's first functional night fighter, the Northrop "Black Widow" is equipped to handle the "night shift". . . to guard newly won air-strips and beachheads . . . to intrude on the enemy's own home ground and upset his plans for offense and defense . . . to destroy his planes.

The P-61 "Black Widow", product of Northrop know-how and craftsmanship, is the largest, most powerful pursuit plane in the skies. It has long range, great speed, fast climb. It is heavily armed.

This new U. S. weapon was designed in cooperation with the Army Air Forces Matériel Command by the Northrop group. In the months ahead you'll hear more about this airplane, see more of it. The deadly "Black Widow". The P-61.

NORTHROP
Designers and Builders of the
P-61 "Black Widow" NIGHT FIGHTER

NORTHROP AIRCRAFT, INC. • NORTHROP FIELD, HAWTHORNE, CALIFORNIA • MEMBER AIRCRAFT WAR PRODUCTION COUNCIL, INC.

METAL STAMPINGS OF QUALITY

The Metal Specialty Co. is completely equipped to give efficient service in Stamping, Rolling, Coining, Forming and Annealing in all Metals. Specialists in Hydraulic cold drawing and embossing in all metals including Stainless Steel. Deep drawing and embossing up to 850 tons capacity. Shells drawn up to 20" depth. Assembling including Flash and Resistance Seam Welding. Pressed Metal Products to order.

The
METAL SPECIALTY *Co.*
MAIN OFFICE AND PLANT • ESTE AVENUE • CINCINNATI, OHIO

"...and change the water in my crankcase, please"

Yes, you *could* use water to lubricate your engine—if you drove very slowly and didn't go far. For water does have some lubricating qualities and it is an acceptable coolant.

In fact, the earliest cutting fluid was water—a man named Taylor having discovered, back in 1880, that if he let water pour over the metal, it allowed faster cutting speeds and better operation.



But the slow cutting speeds and soft metals of 64 years ago are hardly to be compared with the tough alloys and precision, high-speed cutting of today...Today, you would be wise to use Union Oil cutting fluids.

For in 1943, Union Oil Company placed on the market a *completely new* line of cutting oils, designed to meet every requirement of the machining world. Union's cutting oils facilitate rapid heat transference, keep the job cool and prevent

burned metals and seizure between chip and tool. They have excellent lubrication qualities and their resistance to oxidation is unexcelled.

Union Oil's cutting fluids protect against corrosion of metals and machinery and they are noninjurious to the skin.

There is a Union cutting oil for every type of operation from soft aluminum and magnesium to the toughest manganese steels. If you want cutting fluids that are laboratory designed to do *any* and *every* job—and if you like to buy from a single source—phone a Union Oil Company Resident Manager in any

of the five Western states or write Union Oil Company of California, 617 W. 7th Street, Los Angeles, California, Zone 14.

UNION CUTTING OILS

Another
UNION OIL
Success-Tested Product

Union Oil Company—maker of 492 quality products—is the largest independent oil company in the West.

LIGHTNESS

one of the six measurements of aircraft engine air filters

In 1940, the filter for a 1,250 horsepower airplane engine weighed nine pounds. Today, the Air-Maze filter for that engine weighs 1.6 pounds.

If this lightness were attained without consideration for efficiency, durability and dust capacity, it would not be remarkable. But lightness in aircraft filters is not a goal in itself.

Honest engineering calls for the utmost efficiency, the longest life, the largest capacity—with the least possible weight.

This is the basis on which Air-Maze has engineered lightness into its filters. Aircraft filter research that dates from the twenties led to the development of a new kind of media, to the use of lighter, strong materials, to new designs and higher velocities.

The lightness of Air-Maze aircraft filters springs from this sound, creative engineering. It is not won at the expense of those other qualities that make aircraft filters so effective in lengthening engine life and reducing maintenance.

FACTS about aircraft engine air filters . . . types, improvements, performance data. Send for your copy of "Aircraft Engine Air Filters" now.

INSTALLATION DEVICES AVAILABLE

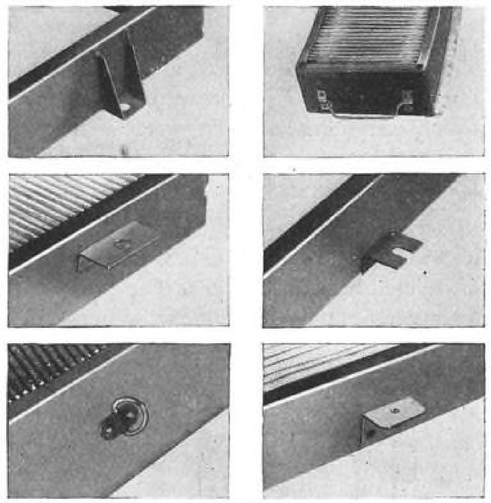

Air-Maze aircraft filters can be furnished with various attachment devices on order, offering both economy and time savings. Send for Bulletin 113.

AIR-MAZE CORPORATION • *Engineers and Manufacturers* • **CLEVELAND 5, OHIO**

Representatives in Principal Cities • *In Canada:* Williams & Wilson, Ltd., Montreal, Quebec, Toronto, Windsor

ARMY E NAVY

AIR-MAZE

SPECIALISTS IN AIR FILTRATION

TODAY AND TOMORROW

Today, tomorrow and until the war is won every Allison engine is built to a standard that embraces five "must" qualities: ★ *Performance* that helps our fighters win battles. ★ *Reliability* on which our pilots can depend. ★ *Smoothness* to lessen pilot fatigue. ★ *Economy* for greatest fighting range. ★ *Durability* for maximum fighting readiness. ★ Vital now for our flyers, these are also characteristics you will want in engines that will power postwar planes.

POWERED BY ALLISON

The more-than-50,000 Allison engines built for the U. S. Army Air Forces power the following planes: P-38—Lightning • P-39—Airacobra P-40—Warhawk • A-36 and P-51—Mustang

LIQUID-COOLED AIRCRAFT ENGINES

Allison

DIVISION OF

Indianapolis, Indiana

GM GENERAL MOTORS

KEEP AMERICA STRONG BUY MORE WAR BONDS

Every Sunday Afternoon—GENERAL MOTORS SYMPHONY OF THE AIR—*NBC Network*

Product of Evans Engineering – a specially designed machine drills, spot-faces and taps, simultaneously, six of the eighteen engine mount lugs.

Evans Welding Division – here, certified welders turn out, to Evans high standards, the tubular structures for the toughest engine mount made.



Magnaflux Department – magnetized, coated with iron oxide and oil, Evans rugged engine mounts are tested for polarity breaks and sub-surface flaws.

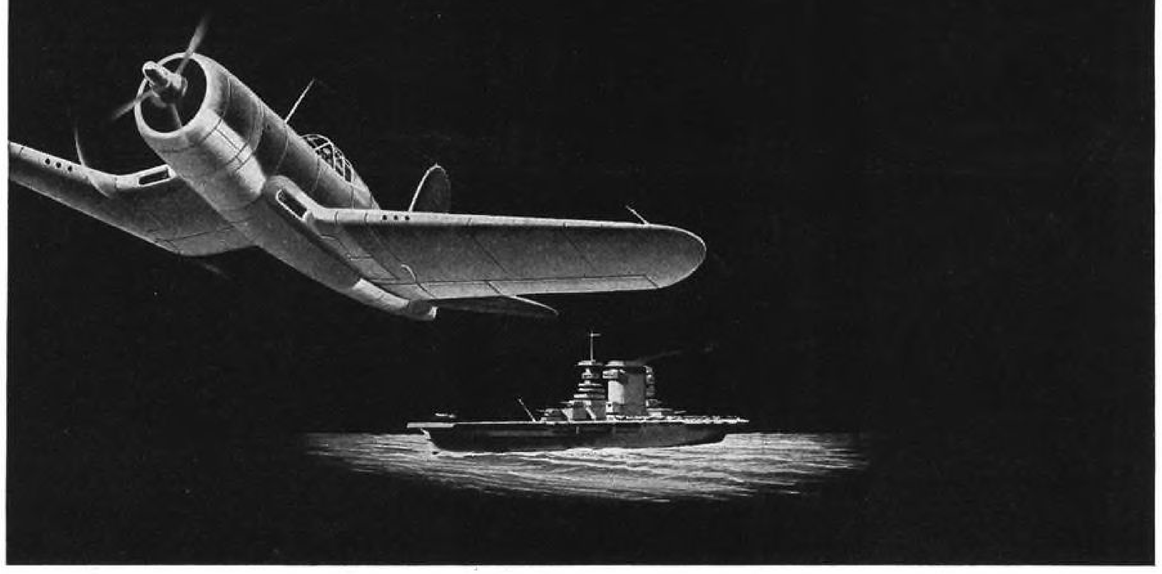

cradle for the Corsair's power

Cradle for the powerful engine in this deadly fighter must be amazingly strong and rigid. Building this engine mount is one of the many Evans wartime assignments which this organization, through years of manufacturing and engineering experience, is covering with dispatch and honor.

Evans developed new types of welding fixtures which increased welding efficiency 30 to 40%; Evans also designed special machinery which reduces machining time by 75%; and an Evans conducted school teaches the new welding procedure to carefully selected craftsmen.

Evans Skyloader, another development of the Evans Sky Products Division, has made a lasting contribution to the transportation of air cargo. This equipment, which is holding down all kinds of cargo in operations all over the world, speeds on-loading and off-loading, and removes all slack from the load, thus making the cargo a part of the plane.

Other Sky Products by Evans are used extensively by the Air Forces. These are employed on missions of such importance that they can not be described at this time.

Evans engineers will welcome an opportunity to discuss your air cargo problems with you.

★ ★ ★

Vision to Anticipate the Needs of Tomorrow Creates New Industries Today

E. L. Evans
PRESIDENT

SKY PRODUCTS DIVISION OF

EVANS PRODUCTS COMPANY

DETROIT

Evans War Products: Machine Gun Mounts • Tank and Automotive Heating and Ventilating Equipment • Evanair Water Heaters • Aircraft Engine Mounts • Airplane Landing Gear Beams • Battery Separators • Prefabricated Houses • Plywood • Skyloader • Utility Loader • Auto-Loader • Auto-Railer • Auto-Stop • Stampings • Evanair Domestic Heating Equipment

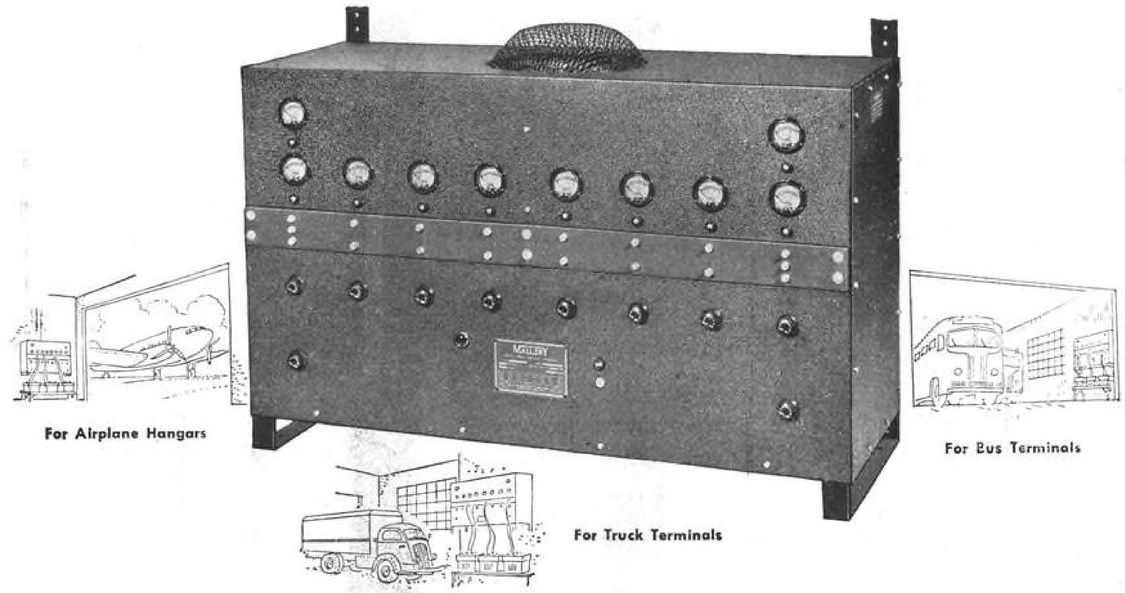

MALLORY
Multi-Circuit Battery Chargers
For 6, 12 and 24 Volt Batteries

Check These Features

Controlled charging of individual batteries.

No moving parts — nothing to wear out.

Excellent voltage regulation.

Requires no attention once adjustment is made and charging started.

Remove any battery from rack without making adjustments on other battery circuits.

Rugged construction. Built to withstand shocks and vibration. Durable steel case protects interior parts.

In airplane hangars, bus, truck or van terminals, tank depots—wherever there are batteries of 6, 12 or 24 volts—Mallory Multi-Circuit Battery Chargers will do an efficient charging job.

From one to ten batteries may be charged simultaneously, and the correct charge for each battery is provided by individual controls.

Mallory magnesium copper sulphide dry disc rectifiers assure dependability and long life. They provide a "Time-Tried and Proven" method of rectification which eliminates all moving parts, and is noiseless in operation. Models to operate from 230 or 460 volt 3 phase AC outlets.

Compactly built, the Multi-Circuit Battery Charger has an excellent record for low cost operation. Write direct or to your nearest Mallory distributor for further details.

Back the Attack—
Buy War Bonds

P. R. MALLORY & CO., Inc., INDIANAPOLIS 6, INDIANA

*Rectostarter is the registered trademark of P. R. Mallory & Co., Inc., for rectifier units for use in starting internal combustion engines.

P. R. MALLORY & CO. Inc.
MALLORY

MAGNESIUM COPPER SULPHIDE RECTIFIERS—
STATIONARY AND PORTABLE D. C. POWER SUPPLIES—
BATTERY CHARGERS AND AVIATION RECTOSTARTERS*

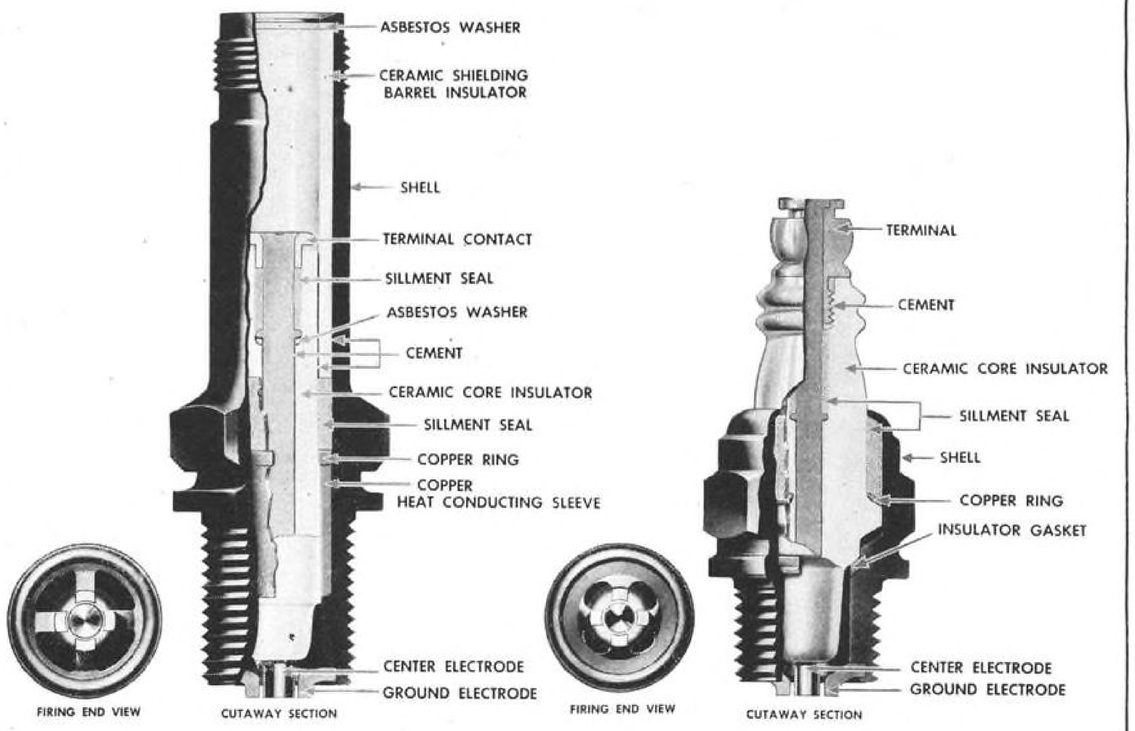

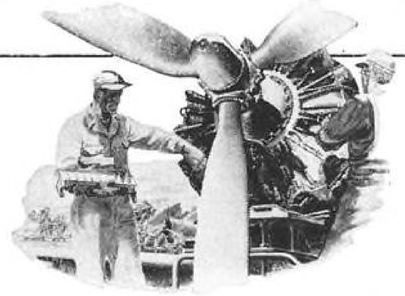

No Aircraft Spark Plug Is Better Than Its Insulator

Considering the wide diversity of service, climatic and atmospheric conditions encountered by the air forces of our armed forces, it is truly remarkable how few types of Champion Spark Plugs are required to meet all needs of practically all engines in service throughout the world.

The fundamental reason for this is to be found in the specially developed insulating material used in Champion Aircraft Spark Plugs. Possessed of unequalled dielectric strength, resistance to heat and mechanical shock, and being practically impervious to moisture, fuel and oil absorption, the insulating efficiency of Champion insulators is highly stable under the widest variations in temperatures and pressures.

The development of such an outstanding spark plug insulating material is the direct and natural result of more than thirty years devoted *exclusively* to the production of quality spark plugs. Champion's Ceramic Division is by all odds the most comprehensive and advanced—its research and engineering facilities unequalled—in the spark plug field.

Since their introduction the demand for Champion Aircraft Spark Plugs has continued to accelerate unabated. Today they are in service and being shipped in quantities which reach astronomical figures, which cannot now be revealed.

ARMY-E-NAVY

CHAMPION SPARK PLUGS

INSTALL CHAMPIONS AND FLY WITH CONFIDENCE

POWER *IS* AS POWER *DOES!*

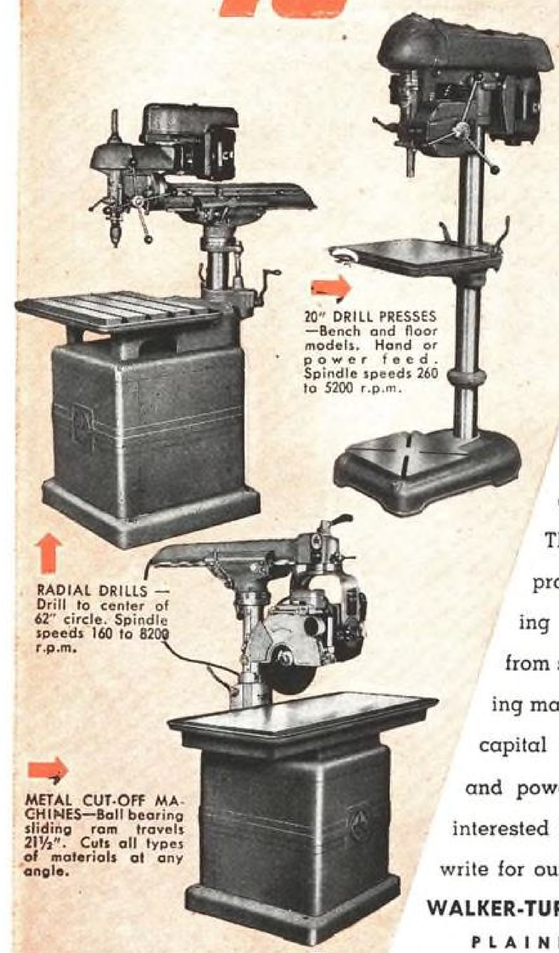

Not a pound, not a horsepower "loafs" in a Walker-Turner Machine Tool. Thoughtful design and careful selection of materials have made them flexible, versatile and stream-lined—yet rugged and accurate. And most of them operate on minimum horsepower requirements.

They are substantially increasing production on thousands of machining operations, involving materials from steel to plastics. They are scoring marked savings for their users in capital investment, operating costs and power consumption. If you're interested in advantages like these, write for our catalog today.

WALKER-TURNER COMPANY, Inc.
PLAINFIELD, N. J.

walker-Turner COMPANY, Inc. PLAINFIELD, N.J. U.S.A.

MACHINE TOOLS

DRILL PRESSES — HAND AND POWER FEED • RADIAL DRILLS
METAL-CUTTING BAND SAWS • POLISHING LATHES • FLEXIBLE SHAFT MACHINES
RADIAL CUT-OFF MACHINES FOR METAL • MOTORS • BELT & DISC SURFACERS

You mean SHE "co-pilots" 80,000* planes?

That's the idea! She's helping to "Keep 'em in the blue"—a task of supply, maintenance and repair that makes the Army Air Forces' *Air Service Command* the world's largest business. A.S.C.'s stock ranges from carburetor springs to bomber wings—totals about 500,000 different articles—and flows in dependable streams to depots, air fields and outposts the world over.

With its goal *the right thing at the right place at the right time in the right quantity*, A.S.C. has standardized in its hundreds of establishments the Kardex Stock Control System this girl finds so easy to operate. In speed, simplicity, compactness and up-to-the-minute accuracy, Kardex *Visible* Record Systems meet stiff military requirements! Kardex shows the true current balance of every individual item at all times—shows it *at a glance* with the exclusive Graph-A-Matic signal. This is the famous Remington Rand "seeing-eye of administrative control."

*The *real* number is, of course, a military secret.

FOR BUSINESS EXECUTIVES: Kardex *Visible* can match this performance on your problems of administrative control. Ask our nearest Branch Office to send a Systems and Methods Technician. Have you got your copy of "Graph-A-Matic Management Control" with its 136 new case studies of "Fact-Power" at work?

COPYRIGHT, 1944

SYSTEMS DIVISION

REMINGTON RAND

Buffalo 3, New York

Prelude TO A PERFECT FINISH

CHICAGO MOUNTED WHEELS AND SMALL GRINDING WHEELS

A complete range of styles, grains and sizes up to 3" in diameter to give you a perfect finish on every job.

PROMPT DELIVERY

Specialization—with full W P B approval—on sizes 3" in diameter and under, means no waiting for Chicago Grinding or Mounted Wheels. Let us take care of your present and post-war requirements.

FREE ENGINEERING ANALYSIS

If you have a grinding job that presents a problem because of the nature of material, tricky shape or other reason, tell us about it. Our experts will go into a huddle and give you the benefit of our long experience making millions of custom built wheels for every conceivable operation.

YES, YOU CAN FINISH IT BETTER WITH A CHICAGO WHEEL

Half a Century of Specialization has Established our Reputation as the Small Wheel People of the Abrasive Industry.

Just as the prelude to a new world is better tools of war, so the prelude to a perfect finish is better grinding wheels.

Today's standards of finishes are far and beyond those of yesterday. To acquire them without sacrifice of production time is a goal which everyone seeks.

Finish must now be measured in micro inches. That's where the new Chicago FV BOND Wheels excel. They give a precision smoothness so intensified that it passes any surface analyzer test, in many cases eliminating hand lapping and auxiliary finishing operations.

HERE'S WHAT MAKES CHICAGO WHEELS CLICK—

A—Sensational new FV BOND. Result of research and experiment on hundreds of aircraft jobs.

B—No sacrifice of cutting time or wheel life.

FV BOND is available in all types of Chicago Mounted and Small Grinding Wheels—in all abrasives, grain and grade combinations.

TEST WHEEL FREE — To prove their superiority in your own shop, send for a Chicago Wheel made with FV BOND. Give us details of the job, material you want to finish and we'll do the rest.

Write for Catalog and interesting Engineering Survey Form

CHICAGO WHEEL & MFG. CO.

1101 West Monroe Street Dept. Av Chicago 7, Ill.

ARMY NAVY MOUNTED WHEELS SMALL GRINDING WHEELS

Send Catalog and Survey Form. Interested in
☐ Grinding Wheels
☐ Mounted Wheels
☐ Send Test Wheel
Size _____

NAME _____ Av-5

ADDRESS _____

Confidence-inspiring *strength*

in fasteners for ships of the air—

★ CLEVELAND AIRCRAFT BOLTS

You may be sure that Cleveland Aircraft Bolts are made strictly to AN specifications—as to steel analysis, dimensions, threading, drilling. *Added*, at no extra cost, is extra strength through manufacture by the Kaufman Process—our own plant development which assures proper grain flow characteristics needed for unusual stress requirements. Write for prices and discounts.

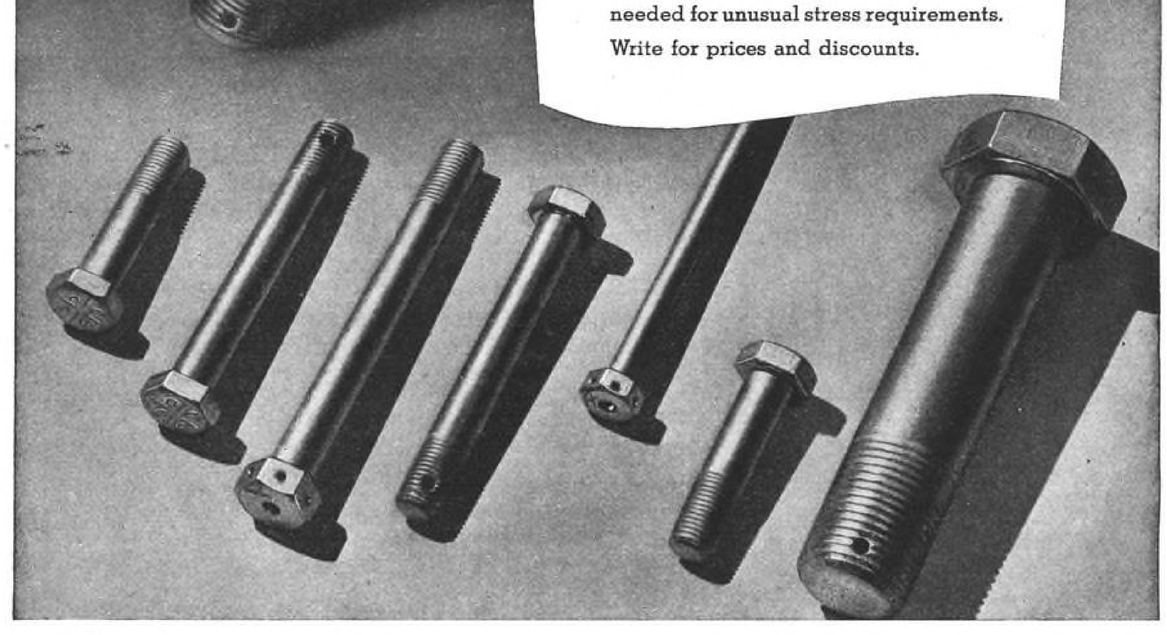

CLEVELAND FASTENERS

The Cleveland Cap Screw Company
AIRCRAFT PARTS DIVISION
2917 EAST 79TH STREET • CLEVELAND 4, OHIO

MADE BY THE ORIGINATORS OF THE KAUFMAN PROCESS FOR GREATER STRENGTH AND ACCURACY

Fighting Aircraft Must Have

GOOD ARTERIES

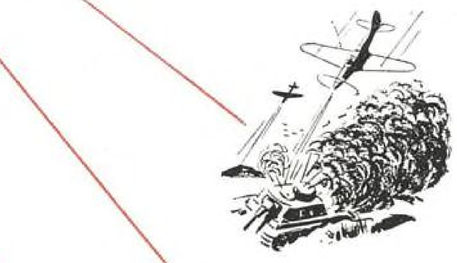

When the aircraft designer specifies Flex-O-Tube, he gives the future crew of that plane the best possible protection of their fuel, oil, hydraulic and instrument lines against the effects of vibration, twisting and wide temperature variations.

The designer recognizes that Flex-O-Tube Company is the oldest manufacturer of hose assemblies in the country; also that this Company has no other product. The Company's entire resources have always been devoted solely to the development and production of hose assemblies, and its engineers, with greater experience, are recognized as authorities in this field.

THE **Flex-O-Tube** COMPANY

LAFAYETTE at 14th AVE., DETROIT 16, MICHIGAN
Offices: CHICAGO · FORT WORTH
LOS ANGELES · NEW YORK
SEATTLE · TORONTO, ONT.

BUY
WAR
BONDS

FORWARD

to the tasks of Peace

WHAT a different story, perhaps had our pre-war planning been as anticipated as post-war planning! Yes, today *foresight* is replacing *hindsight*. Eyes are looking *forward* . . . visions of a postwar world are taking concrete form. And one of these days you'll be glad you thought *first* of things which today are last.

UNITED STATES ELECTRICAL TOOLS

today for war . . . tomorrow for peace

FLEXIBLE SHAFT MACHINES

For overhead or floor mounting. The power transmitted by a flexible shaft is governed by the diameter of the bore and the speed at which it is operated. Motors are ball-bearing, 40-degree ratings and will stand a momentary overload of more than 100%.

Reasonable deliveries — write today

The UNITED STATES ELECTRICAL TOOL Co.
CINCINNATI, OHIO

A Seat for the Mighty! (B-29)

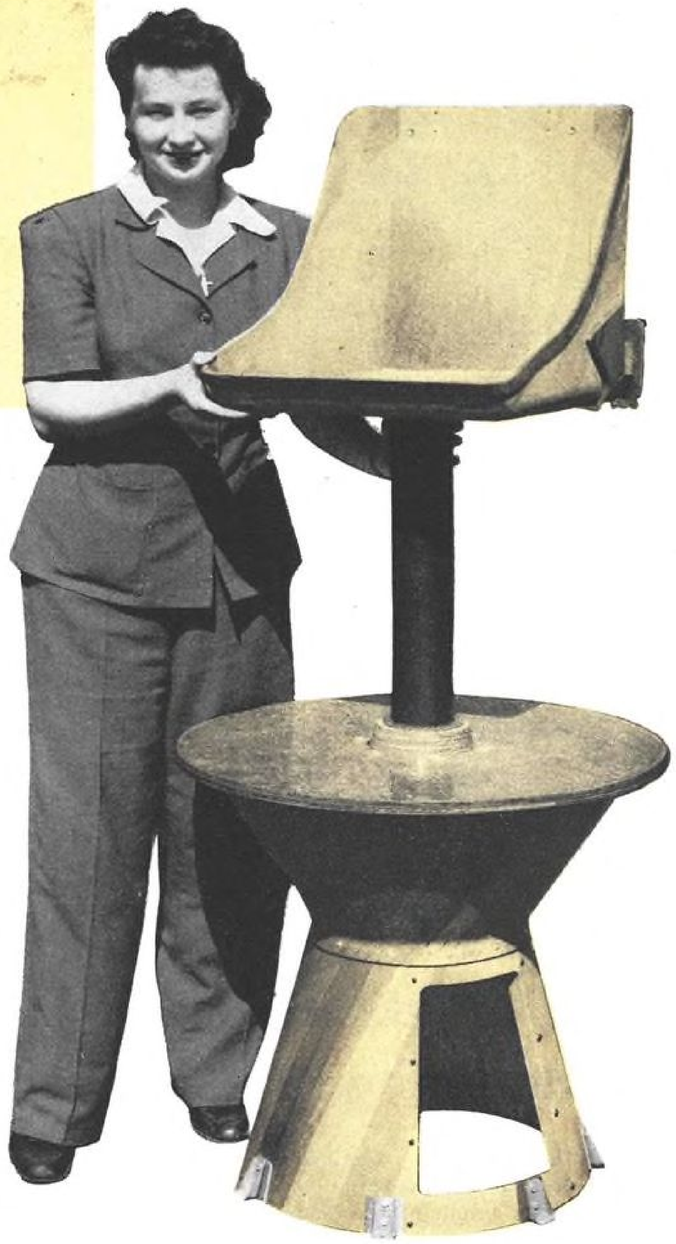

Here is just one of the many parts we are producing for the Super-Bomber B-29 — a complete pedestal and seat for the top turret gunner. Here also is another instance that demonstrates the versatility and adaptability of

MOULDED AND FABRICATED

Plywood

for the manufacture of components for Military Aircraft. In addition to the B-29 we are also making Plywood Components for trainers and transports that materially accelerate their construction. We can offer prompt service to builders of Military Aircraft and their subcontractors. Can we serve you?

STANDARD AND SPECIAL

HANDLING FIXTURES

We are manufacturing many types of Handling Fixtures, including Cranes, Crane Slings, Jigs, Jacks, Cradles and Dollies, that help speed plane production, maintenance and repair. Send us your blue prints for our quotations. Or, we'll submit our standardized designs or design special equipment for you.

AVIATION ENGINEERING
INCORPORATED
1392 BLASHFIELD, S.E. ATLANTA, GA.
T. EDWARD MOODIE, *Exec. V. Pres.*

COLLATERAL ENGINEERING SERVICE

Speeding Supplies TO BATTLE FRONTS

ARNOLT PARTS Help Keep Planes and Ships on the Job!

The dependable performance of the automotive and aviation parts which Arnolt Motor Company builds for prime contractors is an important factor in rushing vital war supplies to distant battle zones.

Arnolt facilities include high speed, automatic turret lathes, grinders, boring machines, drilling machines, screw machines, milling machines, tube bending, electroplating, heat-treating, welding and many other types of equipment. Recent expansion of plants permits acceptance of additional sub-contracting work. Write today for a copy of the brochure, "Available Facilities for the War Program," which gives details on the experience and production capacities of Arnolt plants.

Peacetime Builders of
SEA-MITE
MARINE ENGINES
★

Back the Attack
BUY MORE WAR BONDS

ARNOLT MOTOR COMPANY, *Warsaw, Indiana*
Associated with
ATLAS STEEL AND TUBE COMPANY • MANCHESTER-ATLAS COMPANY

MORRISON AIRCRAFT METAL STITCHERS

Available in 4 Models

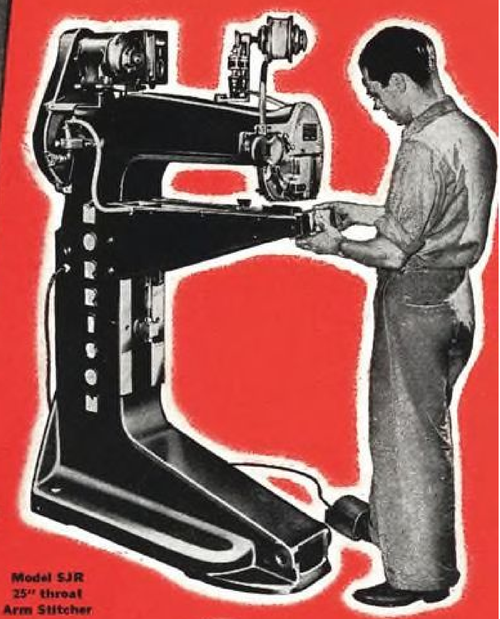

Model SJR
25" throat
Arm Stitcher

Model SJS 25" throat
Bottom Post Stitcher

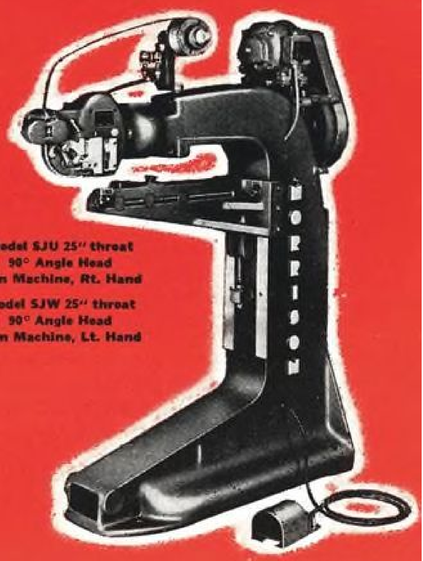

Model SJU 25" throat
90° Angle Head
Arm Machine, Rt. Hand

Model SJW 25" throat
90° Angle Head
Arm Machine, Lt. Hand

Manufacturers, everywhere, are installing more and more Morrison Aircraft Metal Stitchers for stitching more and more parts. The time saving is amazing. *Man hours were cut 86 per cent in one plant alone.*

Four models are now available, producing a flat type stitch as shown below (left), making it possible to handle practically any stitching job that may be encountered. All four models form, drive and clinch stitches in a single operation in approximately 1/30th of a second . . . make clean exit holes with no tearing of metal . . . handle combinations of materials. ANW-13 gives complete specifications on the wire used by aircraft stitchers.

In addition to the four models mentioned there are Models SJX and SJY, producing a curved type stitch. While not approved for use on structural aircraft assemblies these stitchers are fast replacing many lighter, less durable ones in industries such as automotive, metal specialties, farm implements, etc. Write for Bulletin No. A-5.

Flat type stitch produced by models illustrated

★

Curved type stitch produced by models SJX and SJY

★

MORRISON STITCHERS

PRODUCTS OF THE SEYBOLD DIVISION
HARRIS-SEYBOLD-POTTER COMPANY
DAYTON F7, OHIO

1927 Exides fly the Atlantic

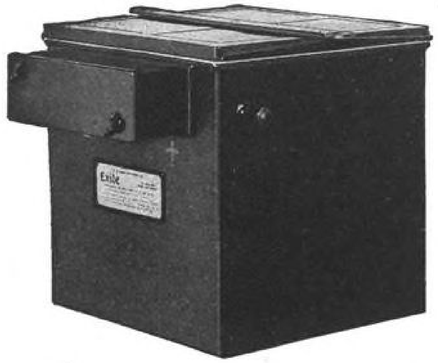

1944 Exides span all oceans

Although Admiral Richard E. Byrd is best known for his Antarctic explorations, his crossing of the Atlantic Ocean in 1927 was of significance to the development of aviation.

Byrd's flight was purely a search for scientific information. The Fokker, "America," was equipped with both radio receiving and transmitting apparatus including Exide Batteries. Byrd proved the value of radio for ocean flying—particularly while flying blind through the fogs so often encountered at sea. And Byrd also proved the dependability of Exide Aircraft Batteries. They functioned perfectly.

Today, as the result of the research of Byrd and other air pioneers, combined with the experience of the present war, Exide engineers are able to provide our military planes with a better, more efficient battery. The electrical systems of our military aircraft are equipped with the best when they include Exide Aircraft Batteries.

THE ELECTRIC STORAGE BATTERY COMPANY, Phila. 32, Pa.
Exide Batteries of Canada, Limited, Toronto

ANOTHER LETTER FROM THE FRONT

Among the letters we receive daily from the 1200 former Exiders in the Service is this one from the Pacific area.

"I guess there is no need for me to tell you I see plenty of Exide Batteries in my travels. And no matter where I go, Exides go too, because they help this old tub of ours to get there; and if Tojo never saw an Exide... he will some day and I hope it's soon."

ARMY E NAVY

Exide
AIRCRAFT
BATTERIES

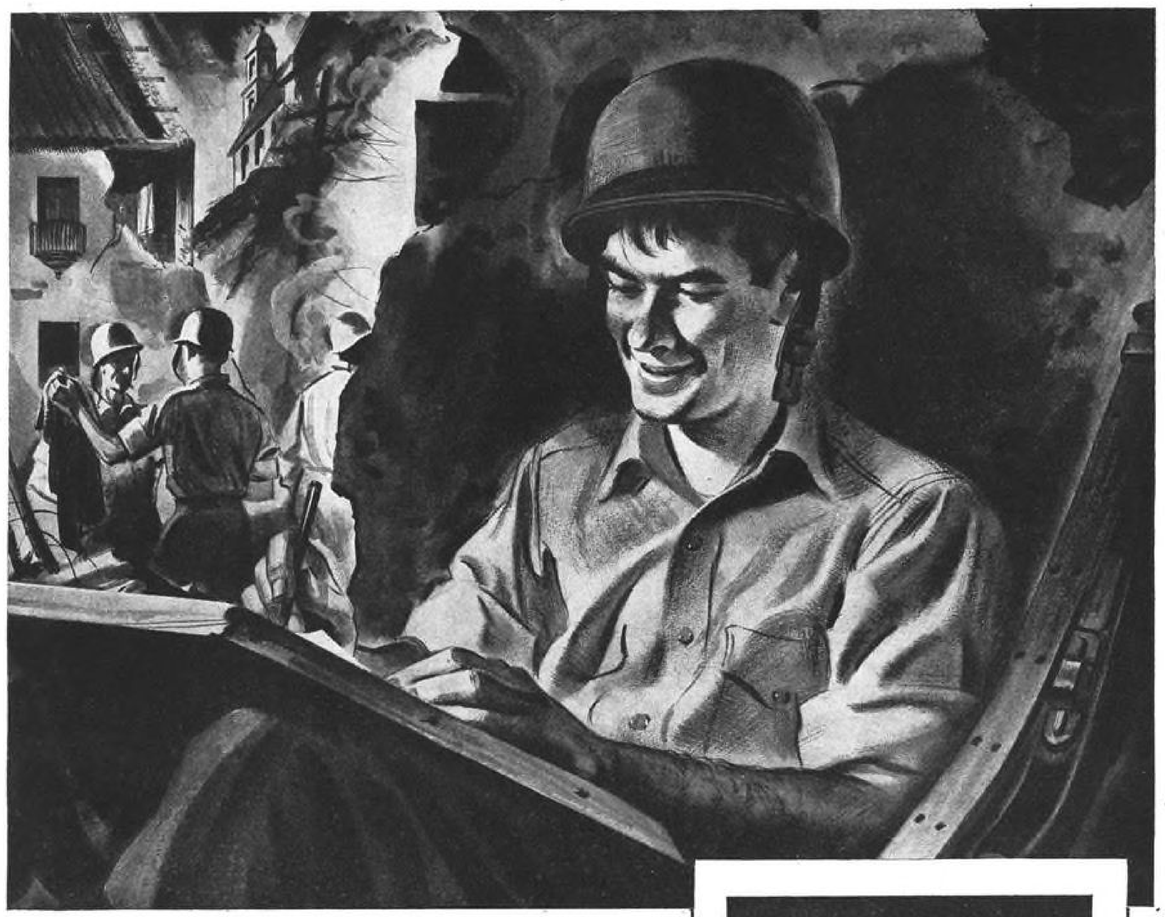

The Story of the Kid from Port Chester

"Dear Mom," he writes, "Today I got a thrill.

"We were going ashore to attack . . . going ashore in a barge when just as we were reaching the beach something hit us hard. We turned over and everyone of us and all the equipment in the barge took a nose-dive in the drink.

"Fortunately it wasn't deep, and we were able to walk ashore and drag the equipment with us. We were assigned to take some of the pieces of equipment and dry them out as best we could. Which we did. And never thinking they'd be any good again, we tried to get them going.

"Much to everyone's surprise the darn things started up and worked. But if you think that was a surprise, how do you think I felt when I noticed that this equipment came from Port Chester . . . Homelite Portable Generators, *made in my home town.*"

ARMY E NAVY

HOMELITE CORPORATION
PORT CHESTER, NEW YORK

Some day it's going to pour

Yes, it will be raining cats and dogs . . . but nevertheless important construction and emergency repair work must be done. On such a job, the portable gasoline-engine-driven generator you need to operate floodlights or power tools cannot be afraid of the rain. The answer will be a Homelite. They can't be stopped by rain.



DANLY NATIONAL ASSEMBLY

DETROIT
ROCHESTER
CLEVELAND
LONG ISLAND CITY
CHICAGO
DAYTON
LOS ANGELES

To Precision Standards

Precision finish of every part in Danly standard die sets makes possible Danly National Assembly. The resultant perfect fit saves you time and money through faster setups and longer, trouble-free operation.

Absolute standardization is assured.

Every Danly Die Set is individually assembled to your specification, through the Danly Plan of National Assembly to Precision Standards.

DANLY MACHINE SPECIALTIES, INC.
2100 South 52nd Avenue • Chicago 50, Illinois

Call Danly:

CHICAGO
2100 South 52nd Ave. . . *Lawndale 7440*

DETROIT
1549 Temple Avenue . . . . . *Cherry 6666*

CLEVELAND
1550 East 33rd Street . . . . *Express 0300*

DAYTON
990 East Monument . . . . . *Fulton 6651*

ROCHESTER
16 Commercial Street . . . . . *Main 2554*

LONG ISLAND CITY
47-28 37th Street . . . . . *Ironsides 6-8080*

DUCOMMUN METALS & SUPPLY CO.
Los Angeles . . . . . *Kimball 0181*
4890 South Alameda Street

DANLY DIE SETS

DIE MAKERS SUPPLIES • *Welded Steel Fabrication*

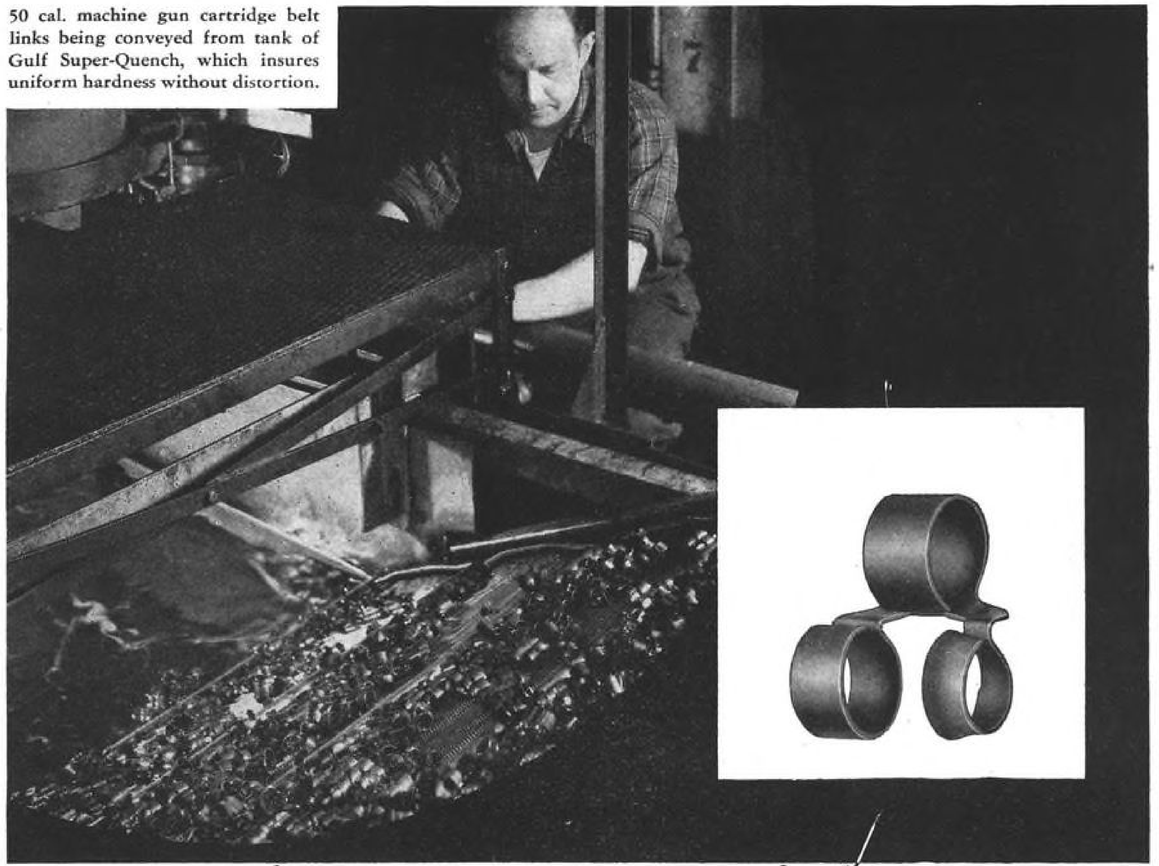

50 cal. machine gun cartridge belt links being conveyed from tank of Gulf Super-Quench, which insures uniform hardness without distortion.

Another tough heat treating problem solved with

Gulf Super-Quench

. . . Cartridge belt link production increased 30%

Revolutionary new quenching oil gives necessary loop tension without distortion, eliminates rejections, and reduces press down-time for die work 33%.

Before Gulf Super-Quench was put in service in this plant, ordinary quenching oils wouldn't produce the necessary physicals and the proper tension to hold the 50 caliber cartridges with the required degree of firmness in the loops.

Here are the results with Gulf Super-Quench: Production of links increased 30%, rejections practically eliminated, and press down-time for reshaping dies reduced 33%—another one of many instances where this revolutionary new quenching oil has done an outstanding job.

Here's why Gulf Super-Quench is a superior quenching oil: It has intensified dual-action — a faster cooling rate through the hardening temperature range, and the slow speed of conventional quenching oil below the hardening temperature range. Call in a Gulf Service Engineer today and let him show you how Gulf Super-Quench can help improve your quenching practice. For a copy of the brochure on Gulf Super-Quench, send the coupon below.

Back the attack
Buy more
War Bonds

GULF INDUSTRIAL LUBRICATION

Gulf Oil Corporation · Gulf Refining Company A
3800 Gulf Building, Pittsburgh 30, Pa.
Please send me, without obligation, a copy of the brochure, "Gulf Super-Quench."
Name .....
Title .....
Company .....
Address .....

"GIVE 'ER THE GUN" IN TRANSPORTING TONS OF MATERIAL

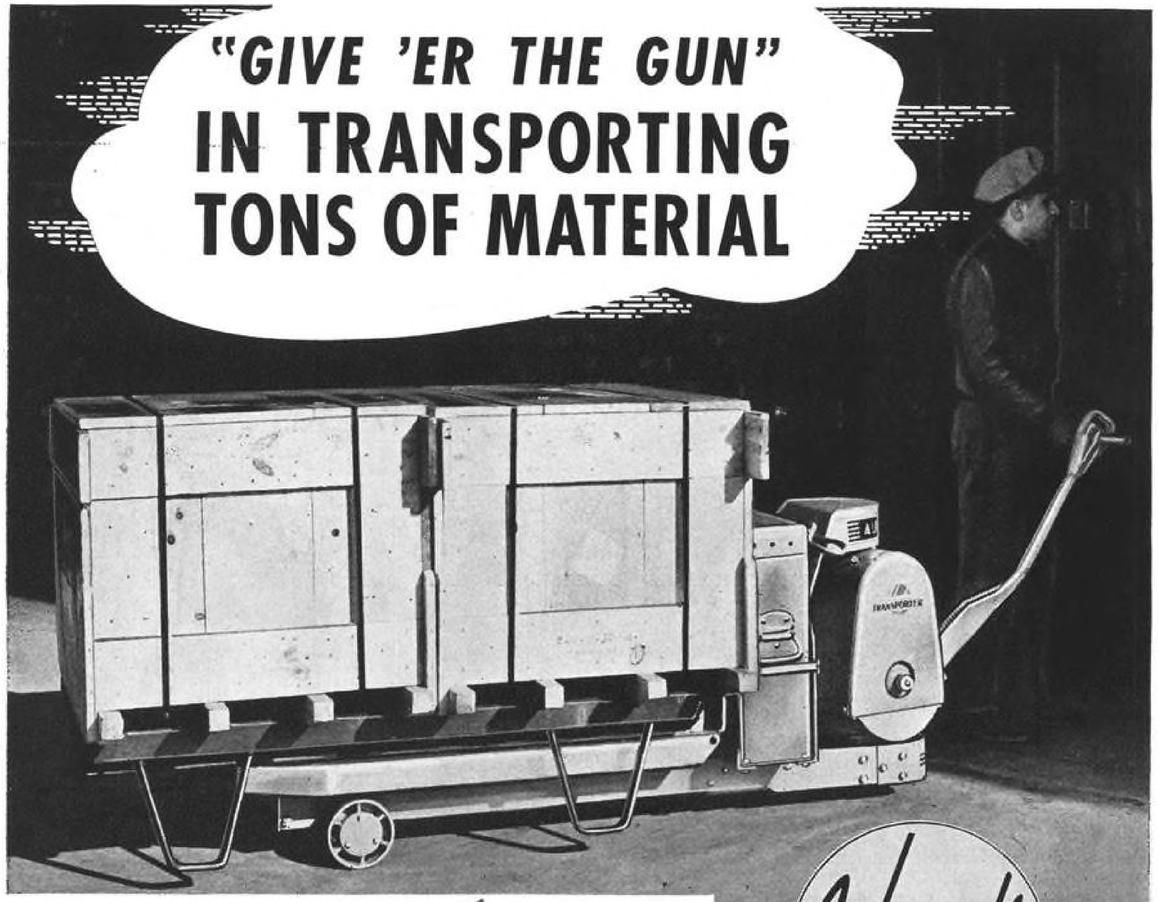

★ You actually "give the gun" to the movement of bulk, boxed, or crated materials when you put a "TRANSPORTER" on the job. No tie-ups — no stops — no clogging of working areas — no back breaking effort. You get increased efficiency—added savings in handling—simplicity in transportation.

The battery powered "TRANSPORTER" is ready to operate at the trucker's command — forward or reverse — with complete brake and speed control. Just a movement of the handle — a push of the button (at operator's finger tip)—and away it goes at safe walking speed.

Such positive and continuous help in maintaining a systematic materials handling system gives a big boost to operations all along the line.

★

Automatic
TRADE MARK
TRANSPORTER

NO STRAINING-
TUGGING-
PULLING
Nor PUSHING

POSITIVE MECHANICAL BRAKE CONTROLS IN STEERING HANDLE
FORWARD AND REVERSE SPEEDS
FRONT WHEEL POWER DRIVE
SHOCKLESS HYDRAULIC LIFT WITH EASY FOOT CONTROL

Write for Details

MANUFACTURERS FOR OVER THIRTY FIVE YEARS *Electric Propelled* INDUSTRIAL TRUCKS

AUTOMATIC TRANSPORTATION CO.
63 WEST 87th STREET — DIV. OF THE YALE & TOWNE MFG. CO. — CHICAGO 20, ILLINOIS

Save time and trouble by specifying

G-E SYSTEMS---*packaged systems!*

ALL you have to do is tell us the performance required of your control system—we'll select all the relays, contactors, pressure and limit switches, and other control devices that are needed, and build them into a system specially designed for your purpose.

No system too complex

No matter what your control needs are—for control of motors, temperature, positioning, etc.—and no matter how intricate the system must be, we can furnish a packaged system to fill the bill. Our equipment is specially designed for lightness. Also, it's designed to withstand severe vibration and to operate at rated current at high altitudes.

These advantages, too:

1. From design right through to test, the system is engineered by General Electric, relieving your engineers of a time-consuming and often difficult task. Careful circuit design by G-E engineers permits simplification without sacrificing performance. For example, it is often possible for us to make one device do the work of two, thereby keeping weight and space requirements low.
2. All the required control devices are assembled, wired, and tested as a unit at our factory, eliminating these operations in your plant, and enabling you to use your available man power and plant space for other purposes.
3. The entire system is assembled in lightweight aluminum enclosures and shipped to you ready for installation in the plane.
4. Centralized responsibility—which means that you can put your control problems up to us, and we'll furnish a system that will do exactly what you want.

Before you again order aircraft control, look into the possibilities and advantages of G-E packaged systems. Our local representative will be glad to give you more information. *General Electric Company, Schenectady, N. Y.*

Duplex, synchronizing d-c control. Typical of G-E systems for aircraft.

Every week 192,000 G-E employees purchase more than a million dollars' worth of War Bonds.

GENERAL ELECTRIC
670-97-8940

PRECISION PRODUCTS
AND ENGINEERED SYSTEMS
FOR AIRCRAFT

THE ELLSTROMS THANK YOU...

Mr. GRANSTEDT

3117 Lincoln Avenue
San Diego, California
November 26, 1943

Mr. Elmer Ellstrom
c/o Dearborn Gage Company
22038 Beech Street
Dearborn, Michigan

Dear Mr. Ellstrom:

It was with great interest that I read your company's ad in the November issue of the "Aviation" magazine about your father, Hjalmar Ellstrom, and the real background of the famous Swedish gage blocks.

Through my own father I heard a lot about your Dad's and Abrahamson's primer work on the gage blocks long before C. E. Johansson stepped in and took hold of this great and worldwide important invention. It is not my intention to take any credit away from Johansson and his great work in connection with the famous gage blocks. But I am very glad to be able to, after many years of telling friends and co-workers in toolrooms about your Dad's work, to have something in print to back up my statement.

Yours truly,
G. C. Granstedt
Gustav C. Granstedt

Elmer Ellstrom

Ralph Ellstrom

Elmer Ellstrom

Picture of grandfather Hjalmar Ellstrom taken around 1900.

Olof Ellstrom
Sgt. in U. S. Army Air Corps

THIS unsolicited letter from Gustav C. Granstedt brings to light the part that Hjalmar Ellstrom played in pioneering the gage block. Because he never came to America to exploit his discovery his name was not known here until his son Elmer and grandsons Ralph, Elmer and Olof started the Dearborn Gage Co. in 1937.

Today, Ellstrom Chromium Plated Gage Blocks are recognized by industry throughout the world for their longer wearing qualities and fine accuracies.

DEARBORN GAGE COMPANY • 22038 Beech Street • Dearborn, Michigan

Originators of Chromium Plated Gage Blocks

How it feels to power dive 15,000 feet in a Flying Fortress

OFFICIAL STORY *from the book, "Target: Germany"**

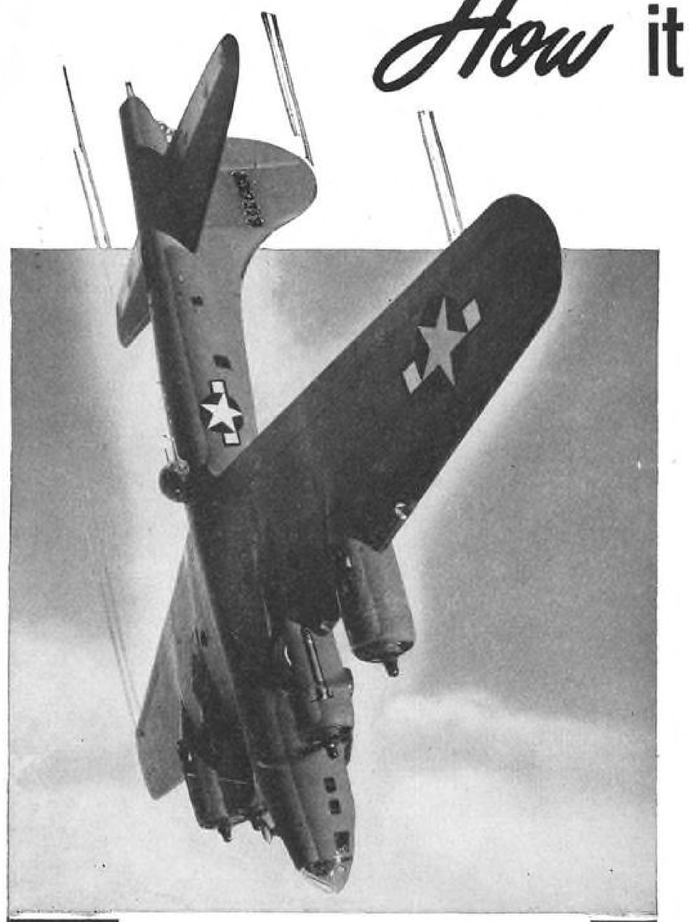

Fuselage spars and chords made of SHELBY Seamless Aircraft Tubing help supply the tremendous strength needed in Flying Fortresses to withstand battle punishment.

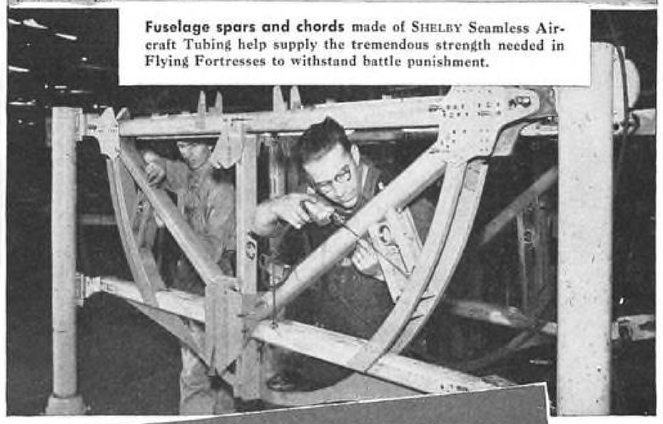

"FREAK accidents occur on almost every mission. A Fortress named *Short Stride* was nearly lost when the life raft hatch in its fuselage flew open. The raft popped out and caught on the tail surfaces, jamming them. The Fort nosed up 300 feet, then went into a 15,000 foot power dive. Crew members were pinned against the ceiling. The interior of the ship became a shambles of wrecked instruments, broken glass, and scattered ammunition. The co-pilot saw the navigator appear twice in the blister well of the bombardier's compartment, then just as suddenly disappear. It was like a crazy movie; first you saw him, then you didn't.

"At 10,000 feet the pilot and co-pilot managed to pull the Fortress out of the dive. The strain was too much for the bomb bay; bomb shackles tore loose, and bombs and bomb-bay doors fell into the sea.** Four members of the crew bailed out. The rest decided to stay with the ship and risk a crash landing. They made it with the life raft still lodged in the stabilizer."

***But the wings stayed on.*

• •

When you hear stories like this you have nothing but admiration for the men who fly these magnificent planes—and for those who design and build them. Anything we can say about the strength of SHELBY Seamless Aircraft Tubing would be an anti-climax to the story. But as an organization we are glad to have been able to supply the seamless steel fuselage spars and chords and the seamless tubing for engine mounts, landing gear and other applications that in actual service took a beating far beyond the dreams of the builders.

**Published for the Army Air Forces Aid Society by Simon and Schuster, Inc.*

Shelby AIRCRAFT TUBING

WALLS WITHOUT WELDS

NATIONAL TUBE COMPANY

PITTSBURGH, PA.

Columbia Steel Company, San Francisco, *Pacific Coast Distributors*
United States Steel Export Company, New York

UNITED STATES STEEL

A Third CITATION

FOR THE INSTRUMENT LEADER

. . . FOR MERITORIOUS WAR PRODUCTION

This third citation for meritorious war production . . climaxing a long record of war service . . . is a source of justifiable pride to the men and women of WESTON.

The record began back in the earliest days of our defense period, when a large segment of WESTONS' capacity was assigned to the production of instruments vital to military needs. Thus, when we finally were forced into this world struggle, WESTON was ready for *full-scale war production.*

This new star which adorns our "E" pennant marks the *third* time WESTON has been *first* in this highly specialized field to receive each successive war citation. Weston Electrical Instrument Corporation, Newark 5, New Jersey.

Laboratory Standards . . . Precision DC and AC Portables . . . Instrument Transfomers . . . Sensitive Relays . . . DC, AC, and Thermo Switchboard and Panel Instruments.

WESTON

Specialized Test Equipment . . . Light Measurement and Control Devices . . . Exposure Meters...Aircraft Instruments... Electric Tachometers...Dial Thermometers.

FOR OVER 55 YEARS LEADERS IN ELECTRICAL MEASURING INSTRUMENTS

All These Needle Bearings are Quickly and Easily Installed

TYPE DC

TYPE FDT

TYPE AT

TYPE NCS

TYPE RC

TYPE PN

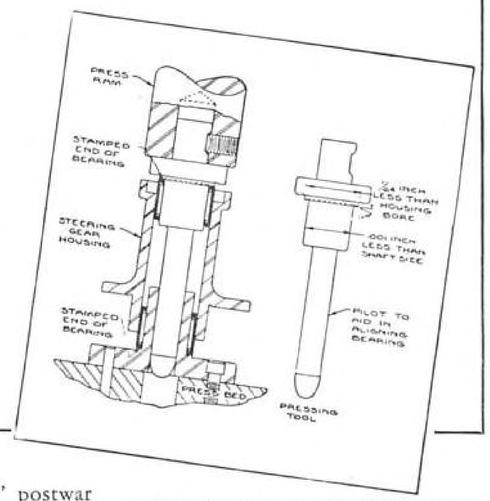

A simple arbor press is the only equipment required to install Torrington Needle Bearings.

UNIT CONSTRUCTION AND SIMPLICITY OF DESIGN FACILITATE ASSEMBLY LINE PRODUCTION METHODS

One of the outstanding features of Torrington Needle Bearings is the ease and speed with which they are installed. Because of their unit construction, handling and assembly or dis-assembly of associated parts or mechanisms are simplified.

Furthermore, the compact design characteristic of these Torrington Needle Bearings makes possible the use of simpler housing structures. In virtually all cases a bore, machined to proper dimensions, is all that is required to hold the bearing. An arbor press (with properly designed pressing tool) is the only equipment necessary to secure correct installation in practically any application.

And properly installed, in correct press fit, Needle Bearings will not shift or creep—eliminating the need of locking-rings or spacers.

All these installation features contribute to speed and efficiency that result in cost economies on the production line. They are helping today in meeting production schedules; will similarly aid "tomorrow's" postwar production lines.

It will pay you to investigate the many advantages of Needle Bearings in terms of your own design and production requirements. A copy of the Torrington Needle Bearing Catalog, available on request, will give you more complete information. Ask for Catalog No. 114. And the services of our engineering department are available to aid you in the selection and application of Needle Bearings for any particular job.

THE TORRINGTON COMPANY

Established 1866 • Torrington, Conn. • South Bend 21, Ind.
"Makers of Needle Bearings and Needle Bearing Rollers"

New York, Boston, Philadelphia, Detroit, Cleveland, Seattle, San Francisco, Chicago, Los Angeles, Toronto, London, England

"LET'S GO! U.S.A. KEEP 'EM FLYING!"

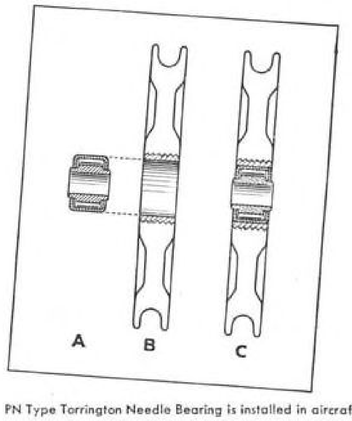

PN Type Torrington Needle Bearing is installed in aircraft pulley by simple press fit.

TORRINGTON
NEEDLE BEARINGS

FIX IT FAST WITH PRE-DOPED TAPES

Ground crews at the front must frequently make repairs under fire. Pre-doped tapes save valuable time — help get the ship back in the fight faster. They help speed the manufacture of planes too. In fact whenever the job must be done quickly and thoroughly, use Airwing pre-doped tapes. With their high-strength and light weight, they meet the latest Army-Navy specifications.

AIRWING AVIATION TAPES come in a complete selection — Grade A made from long staple Pima cotton, Lightweight and Utility — pinked edge, sealedge, biased, and pre-doped. The complete Airwing line also includes airplane and glider fabrics, balloon and other aviation cloths.

If stock items of cloths or tapes do not meet your requirements, bring your special problem to Thurston — supplier to the Army and Navy since World War I.

W. HARRIS THURSTON, INC.
Division of Reeves Brothers, Inc.
40 WORTH ST., NEW YORK 13
Factory and Warehouse
17 BEACH ST., NEW YORK

REG. U. S. AIR WING PAT. OFF.
FABRICS

Write us for the name of your nearest AIRWING Distributor

For "TOP-NOTCH" welding supplies

specify AIRCO *materials!*

popular favorites for welding of aircraft parts, jigs, etc.

Airco No. 4 High Tensile Steel Rod
A high test rod that produces welds of high physical properties. Available in 1/16", 3/32", 1/8", 3/16", and 1/4" sizes—36" lengths.

Airco No. 25 Drawn Aluminum Rod
Ideal for welding sheets of the common aluminum alloy compositions. Made in 1/16", 3/32", 1/8", 3/16", and 1/4" sizes—36" lengths.

Airco No. 26 Drawn Silicon-Aluminum Rod
Made of 5% silicon and 95% aluminum, for welding aluminum and silicon-aluminum alloy products. It is particularly adaptable for welding aluminum regardless of composition where parts are held tightly in jigs. Available in 1/16", 3/32", 1/8", 3/16", and 1/4" sizes—36" lengths.

Napolitan Sheet Aluminum Flux
Superior, economical flux for welding sheet aluminum and cast aluminum. Melts at right heat for ideal fluxing action—about 1060° F.

Save buying time—use AIRCO'S *illustrated price list of gas and arc welding supplies*

This handy booklet gives full details on Airco's comprehensive line of accessories for every gas and arc welding need. Rods, fluxes, brazing alloys, hose, goggles, gloves, and many other welding essentials are listed with prices, sizes, and shipping details. Mail the coupon for your free copy.

If you also want facts on Airco Electrodes, indicate request for Airco's Electrode Price List.

★ BUY UNITED STATES WAR BONDS ★

AIRCO WILSON

AIR REDUCTION
General Offices: 60 East 42nd Street, New York 17, N. Y.
In Texas: Magnolia Airco Gas Products Co. General Offices: Houston 1, Tex.
Offices in all Principal Cities

Air Reduction Sales Co.
60 E. 42nd St.,
New York 17, N.Y.

Please forward as soon as possible:

☐ Airco Gas and Electric Supplies Price List.
☐ Airco Electrode Price List.

Name.....
Company.....
Address.....
City..... State.....

Aircraft Engine Bolts

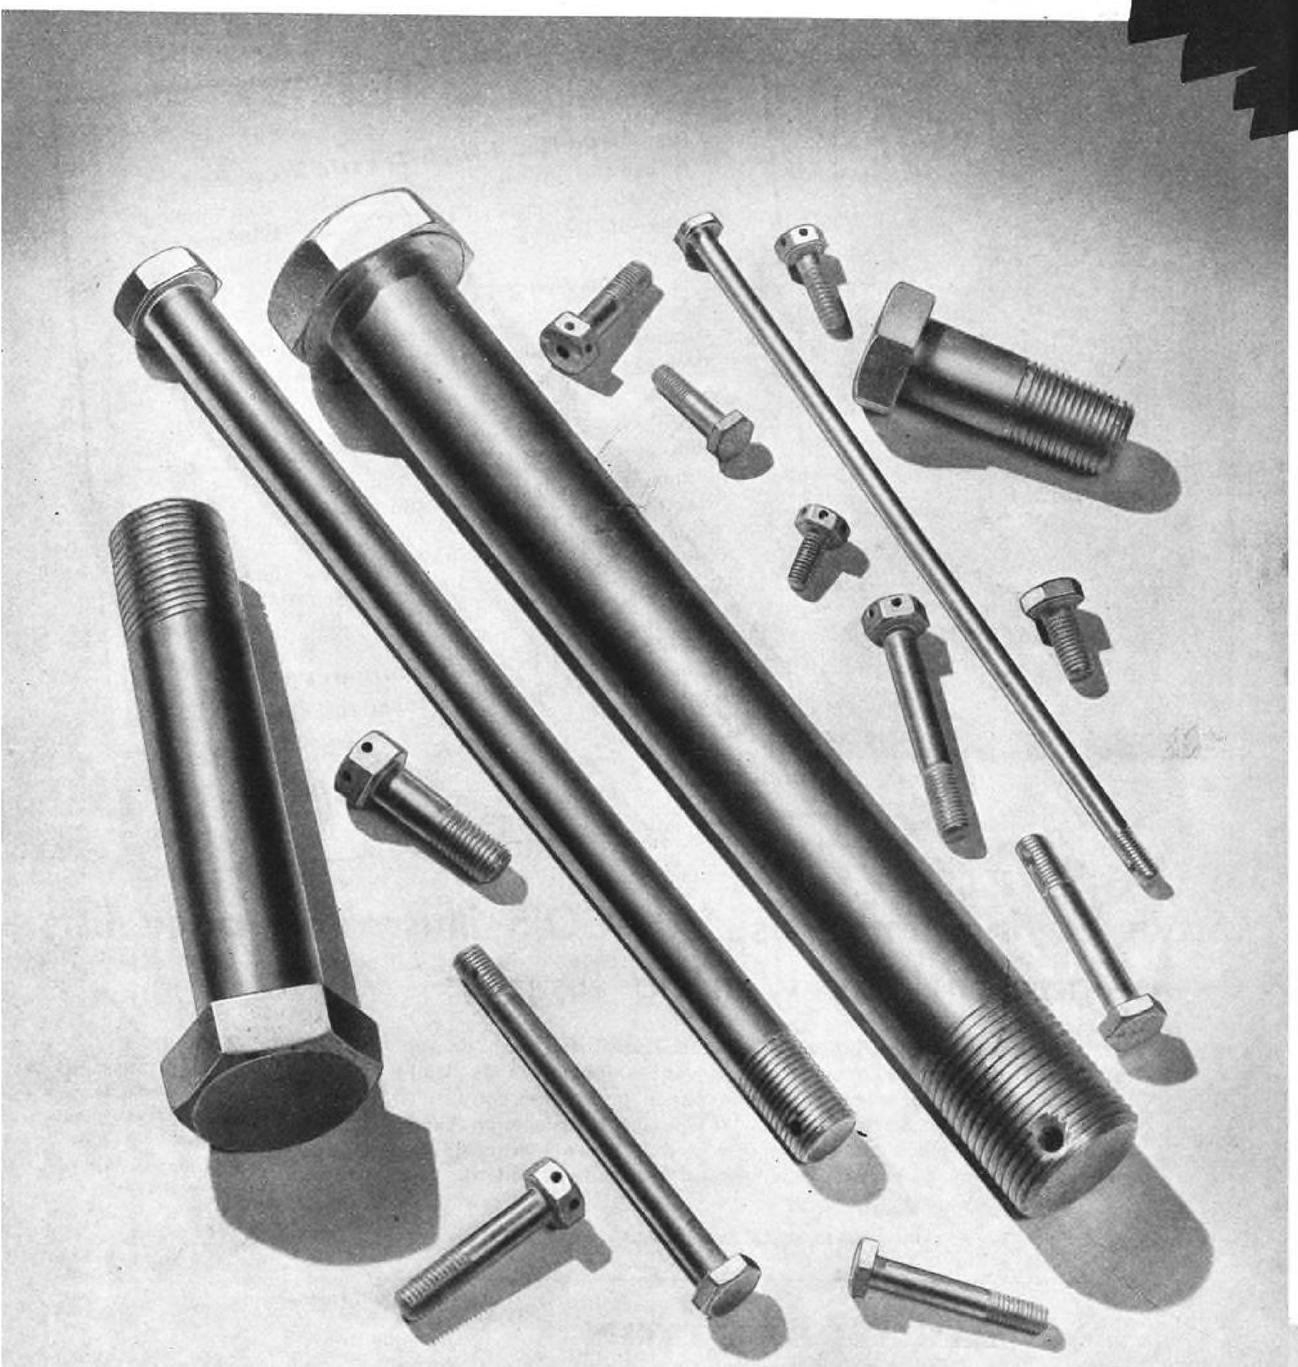

REQUIRE THE KIND OF EXPERIENCE AND TYPE OF EQUIPMENT THAT IS AVAILABLE AT LAMSON & SESSIONS

Whether hot or cold upset, Lamson "AN" aircraft engine bolts and hex head bolts represent the finest product of the bolt-maker's art—a result of "know how" that was begun in 1867 when Lamson & Sessions became bolt manufacturers.

Lamson complies with the latest "AN" specifications. And back of our ability to meet "AN" specifications in large volume production is more than three-quarters of a century of meeting specifications and setting standards of our own, making improvements and setting new standards, and then repeating that cycle over and over again.

A vast volume of aircraft engine bolts and hex head bolts rolls out of our plants daily—made to the highest standards we have ever worked to in a plant where high standards have always existed.

Lamson & Sessions' aircraft products are inspected by the magnetic particle method wherever required. In addition, all other recognized forms of inspection are employed at every step in manufacture. Methods of production and mechanical handling are the most modern available. And finally, Lamson men and women workers are carefully trained and supervised for producing such vital materials as aircraft engine bolts and hex head bolts.

Here we maintain a laboratory for complete metallurgical analyses, to insure maintenance of the high standards demanded of bolts and nuts that must fly with bomber and fighter pilots to the ends of the earth, and back again.

A list of Lamson "AN" aircraft products will be sent you on request.

THE LAMSON & SESSIONS COMPANY, General Offices, Cleveland, O.

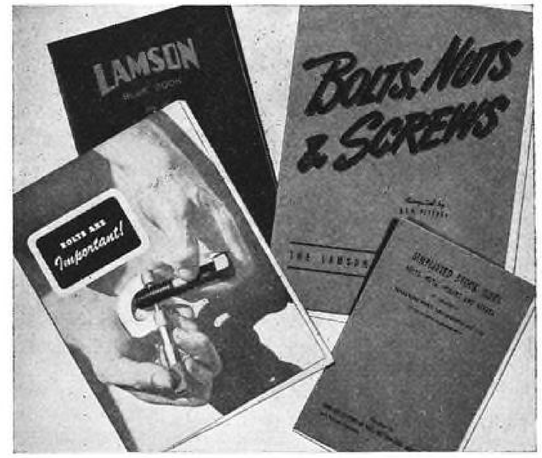

"BOLTS, NUTS & SCREWS"—1944 REVISION, Cloth bound, Limited edition, 180 pages of technical, practical information. Sent prepaid for *$1.00—cash or check must accompany your order.*

"BOLTS ARE IMPORTANT!"—24-page booklet of currently useful information for buyers of headed and threaded products, and describing Lamson & Sessions' specialty fastenings which have wide industrial applications *—now, and in the post-war period. Sent gratis.*

"THE LAMSON BLUE BOOK"—is our standard Catalog of standard products excepting our Aircraft products. *Sent gratis.*

"SIMPLIFIED STOCK LIST"—Of bolts, nuts and screws, conforming to latest revisions of the Office of Price Administration, and of great value in showing you in what ratio quantities of various standard products are kept in stock for deliveries, by your jobbers and in our own (and other bolt manufacturers') warehouse stocks. *Sent gratis.*

HERE'S A COUPON FOR YOUR CONVENIENCE

THE LAMSON & SESSIONS COMPANY • 1971 West 85th Street • Cleveland 2, Ohio

Please send us ☐ Lamson Blue Book ☐ Bolts, Nuts & Screws ($1.00) ☐ Bolts are Important! ☐ Simplified Stock Sizes

Name of Individual _____ Title or Kind of Work _____

Employed by (Name of Company) _____

Street Address _____

City and State _____

No. 1924—Copyright 1944—The Lamson & Sessions Co.

LAMSON & SESSIONS

"AN" BOLTS · · "AN" NUTS · · "AN" COTTERS · · "AN" SPECIALS

Aircraft Division

IF YOU MAKE HYDRAULIC PRODUCTS YOU NEED "PAR" PACKINGS

"Par" hydraulic Packings effectively seal-in the vital power actuating numerous mechanisms or the planes which carry our fighters over the Arcti wastes . . . above tropical jungles—in safety.

The identical "Par" hydraulic Packings which are daily meeting the rigid specifications under actual service conditions of military aviation, will the manufacture of aircraft.

Your problem may be one of operation in extremes of heat or cold . . . at high temperatures or low . . . under varied atmospheric conditions. No matter what your particular difficulties may be—"Par" Packings can be furnished in the exact composition to meet the requirements of

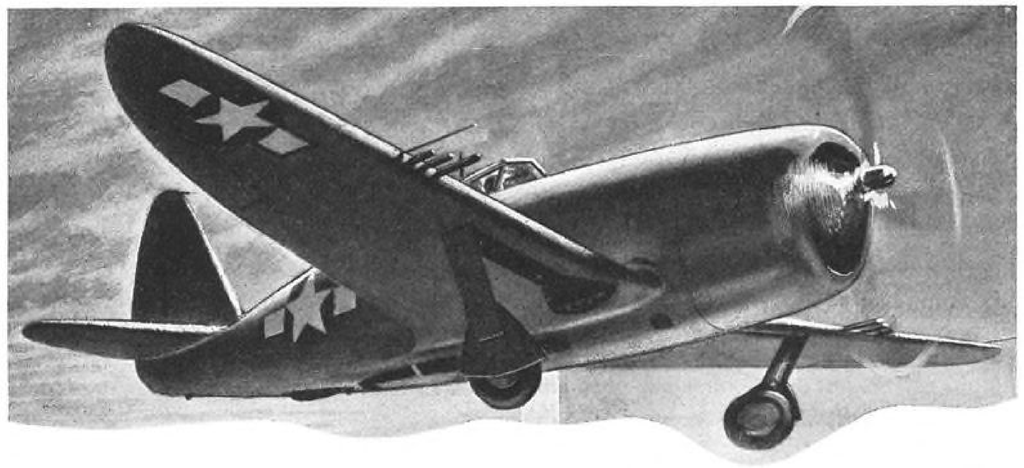

be available for your use in post-war days . . . ready to improve your product . . . stepping up its mechanical performance . . . eliminating waste due to fluid leakage . . . "Par" Packings are also highly recommended for various types of hydraulically actuated or controlled machinery used in your job. Precision ground and rigidly inspected, these rings effect a perfect seal.

We invite engineering consultation . . . samples are available. Our wartime experience can help make your peacetime product better. Write today!

LINEAR

PACKING AND RUBBER CO.

STATE ROAD AND LEVICK STREET
TACONY, PHILADELPHIA 35, PENNA.

PIONEER MANUFACTURERS OF SYNTHETIC PACKING RINGS

Over 40 Years Experience in the Design and Application of Mechanical Packings

"PAR" PACKINGS

Molded in various compounds to meet the varied requirements of a variety of users . . . precision ground and thoroughly tested to meet rigid Army and Navy standards . . . "Par" Packings form a positive seal for hydraulic power . . . deliver top performance under all conditions.

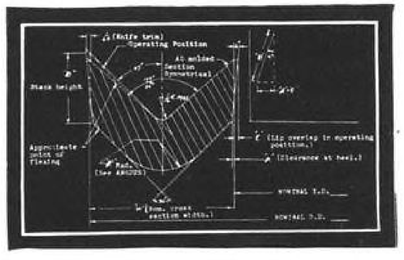

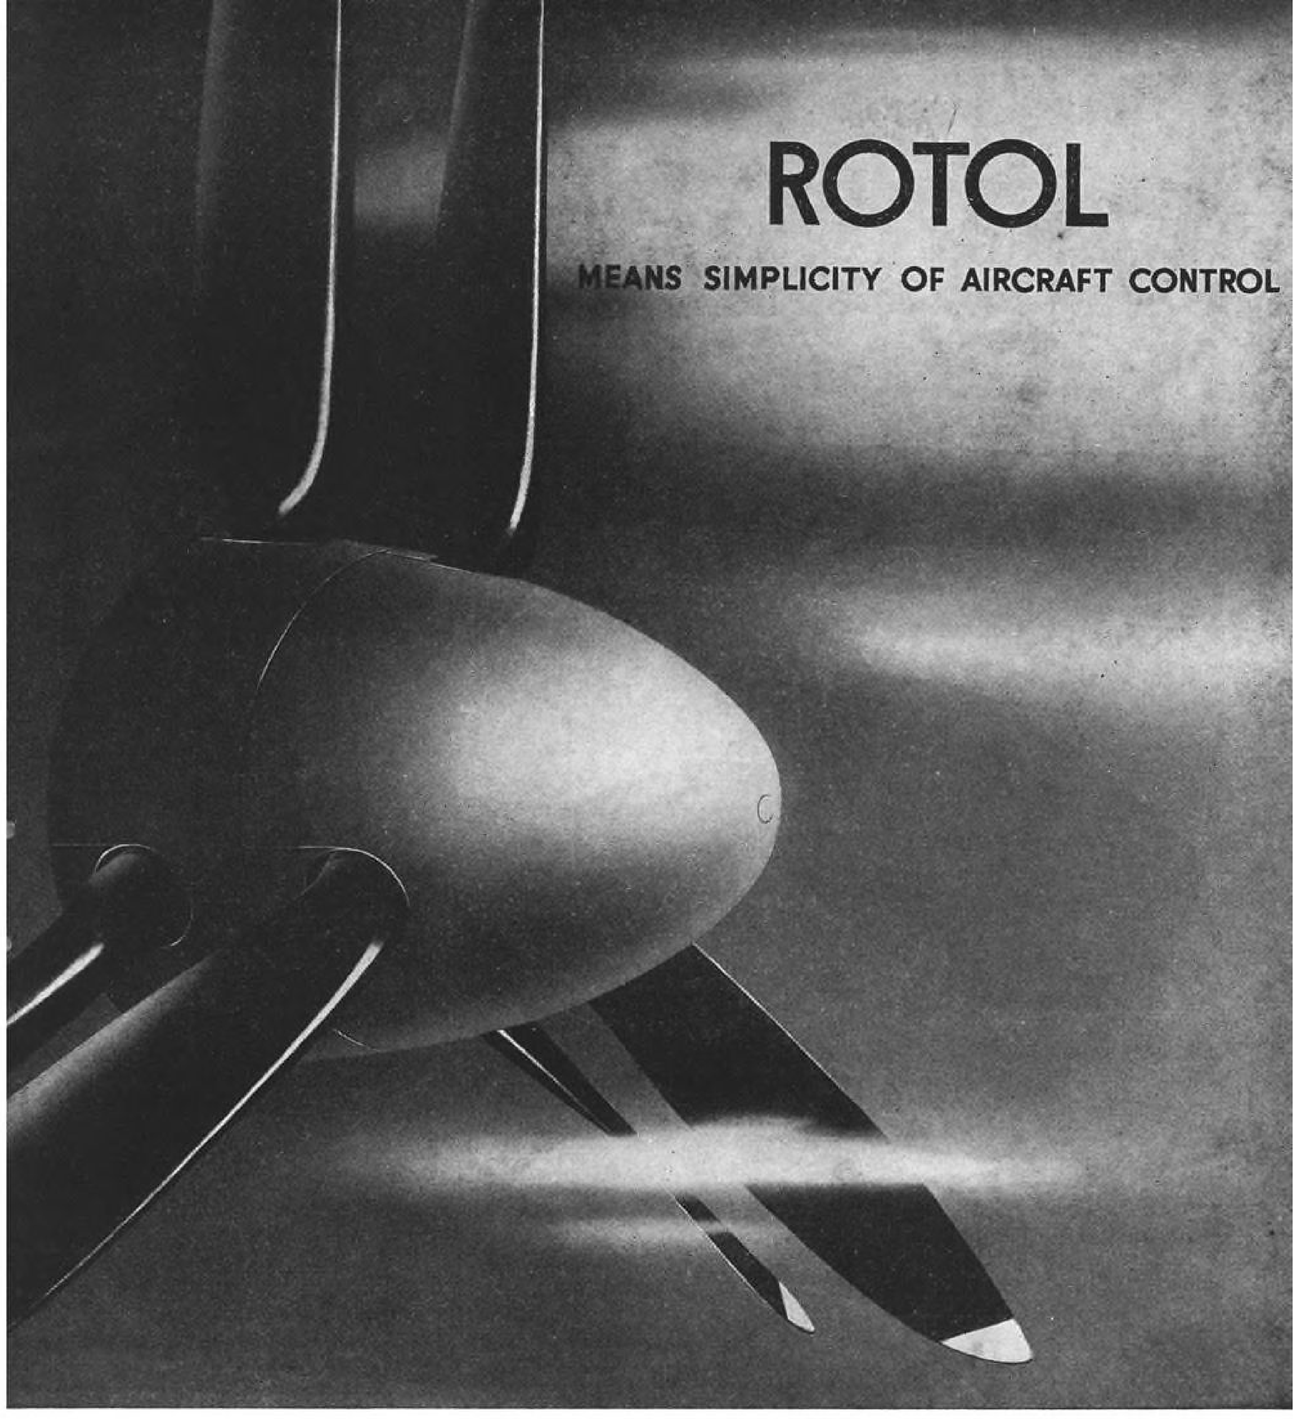

The ROTOL *Contra-Rotating* **PROPELLER**

'CONSTANT SPEED' FEATHERING

MIO

ROTOL LIMITED, ENGLAND • *Canadian Representatives:* **BRITISH AEROPLANE ENGINES LIMITED • MONTREAL**

VICTORY IN THE HEADLINES

FEDDERS { *Aluminum* INTERCOOLERS, AFTER COOLERS, OIL COOLERS, RADIATORS

IN THE PRODUCTION LINES

Fedders unusual contribution of long heat transfer experience, plus ultra-modern research and testing facilities, plus specialized metal working skills, is helping "to save the day" for America's largest aircraft manufacturers.

fedders

HEAT EXCHANGER DIVISION — BUFFALO 7, N. Y.

an aircraft . . .

FORGING

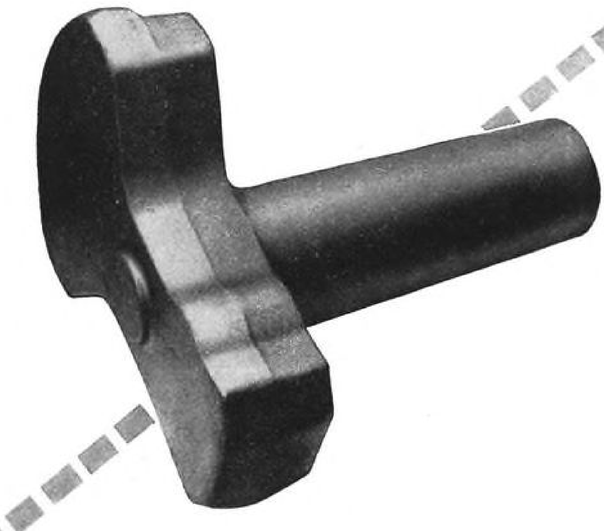

In forging this Radial Engine Crank Half,

it is imperative to make full use of the benefits of precisely directioned fiber structure throughout in order to develop and concentrate the utmost strength and toughness at the points of greatest shock and stress. In forming this 160-pound forging, the utmost IMPROVEMENT OF METALS BY FORGING is obtained by determining and using the exact die design and forging technique required for positioning the grain flow to resist the sudden concentrated stresses to which this aircraft forging is subjected. Such know-how has been gained from over 30 years experience and observation in forging hundreds of shapes and designs.

DROP FORGINGS

THE STEEL IMPROVEMENT & FORGE CO.

960 East 64th Street CLEVELAND, OHIO

ELECTRICITY
For Any Job . . . Anywhere

For a dependable source of electricity on Aviation projects remote from commercial power, Onan Electric Plants are proven leaders in the field. More than half of the armed Forces' total requirements for Power Plants are built by Onan.

Gasoline-driven . . . Single-unit, compact design . . . Suitable for mobile, stationary or emergency service.

Over 65 models, ranging in sizes from 350 to 35,000 watts, 50 to 800 cycles, 110 to 660 volts, A.C.— 6 to 4000 volts, D.C.— Also dual A.C.-D.C. output types.

Descriptive literature sent promptly on request.

D. W. ONAN & SONS
3122 Royalston Ave.
Minneapolis, 5
Minnesota

Airborne
SERIES OTC

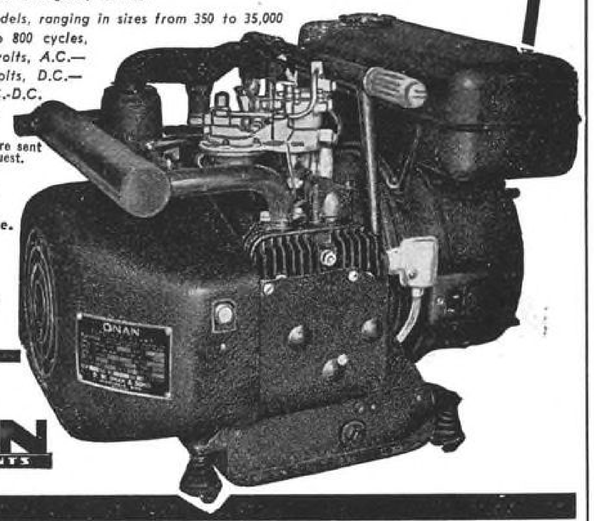

ONAN
ELECTRIC PLANTS

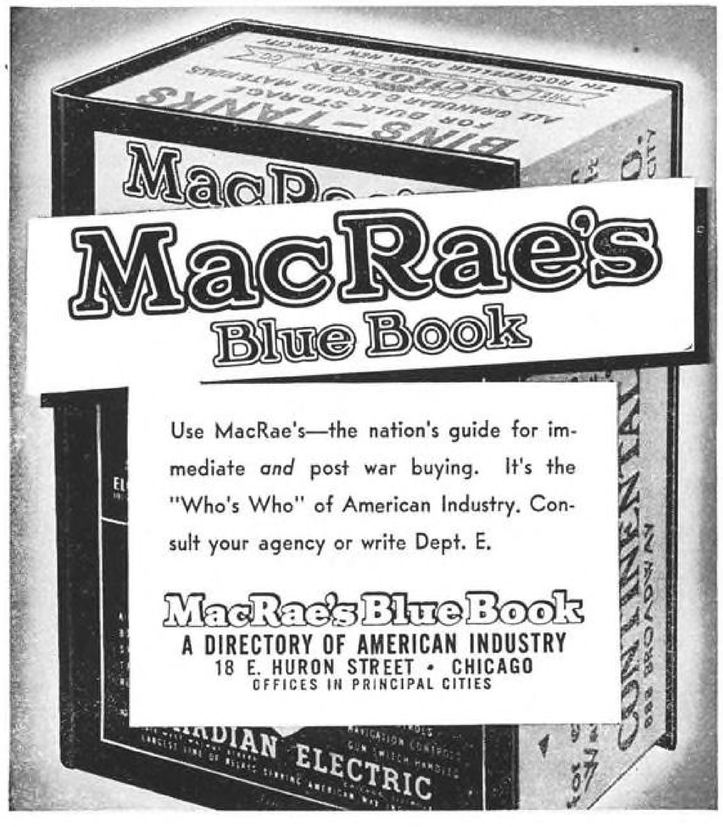

Absorbed 578% *of its weight in oil!*

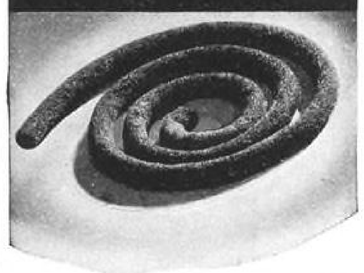

After 24 hours' immersion in S.A.E. 20 oil, wick specimens (each .25" diam. x 30" long) of six different types of Booth "prescription" felts were surface-drained and then weighed. Oil absorption as high as 578% of the original weight of specimen was recorded.

Various Booth felt tests, by independent laboratories, may give you new angles on felt. Ask for copies of the reports.

THE BOOTH FELT COMPANY
482 19th Street Brooklyn, N. Y.
745 Sherman Street Chicago, Ill.

APPLICATION CHART AND SAMPLE KIT . . . Contains swatches of S.A.E. felt types, with specification tables. Write for it. (No sales follow-up.)

2074

Booth
TRADE MARK

PRECISION CUT FELT PARTS

THE STANDARD OF THE AIRCRAFT INDUSTRY

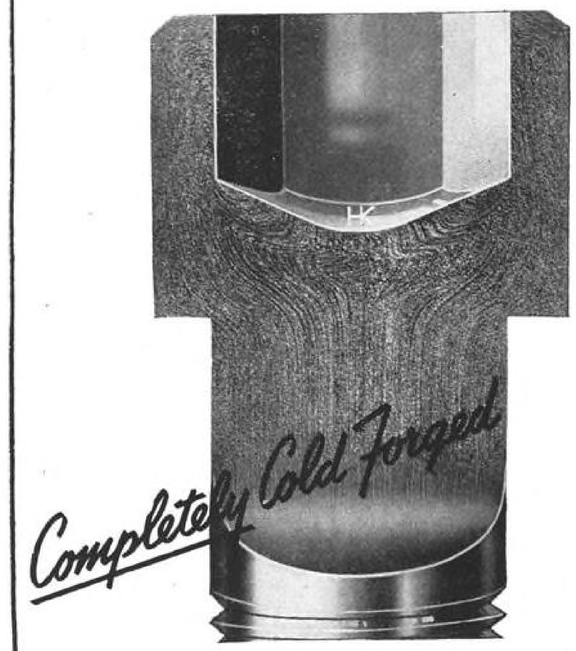

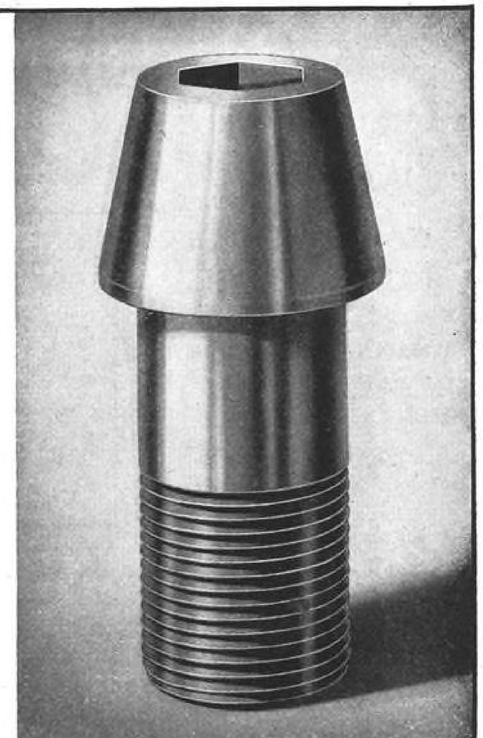

Unretouched Photo Etched Cutaway Holo-Krome Bolt

NASC SPECIFICATIONS

HOLO-KROME
Internal HEX *Wrenching*
BOLTS
DO THE JOB FOR WHICH THEY ARE INTENDED

SPECIFY "HOLO-KROME"
SAVE WEIGHT - SPACE - TIME



QUICK & POSITIVE TIGHTENING
DUE TO INTERNAL WRENCHING

AIRCRAFT DIVISION— THE HOLO-KROME SCREW CORP., HARTFORD 10, CONN., U. S. A.

WELDON *Aircraft* FLUID METERING PUMPS

ELECTRICALLY DRIVEN ANTI-ICING PUMPS

•

CABIN HEATER FUEL PUMPS

•

ADAPTATIONS FOR ENGINE-DRIVEN PUMP REQUIREMENTS

•

For Data on Engineering, Pressure Ranges and Special Pump Requirements Write:

GENERAL CHARACTERISTICS OF STANDARD MODELS

Capacity Range . . . ½ to 10 G. P. H.
Weight — (*Double Outlet Models*)
Pump only . . . . . 8¼ oz.
Pump and Motor . 2 lbs. 5½ oz.
Wet Suction . . . 7" Hg. to 20" Hg.
Dry Suction . . . .5" Hg. Minimum

DIRECT DRIVE — NO GEARS
Single and Double Outlets

THE WELDON TOOL CO. *Cleveland 4, Ohio*
3000 WOODHILL ROAD

INSTITUTE OUR PLANNED PROCEDURE

A Treatment and Control for Industrial Skin Irritations

Cut out this ad and attach to your letterhead. It will bring you a good sized jar of TARBONIS without charge, a complete dispensing Manual and an attractive booklet we can furnish your employees on sanitation and precaution. Why experiment further? . . . TARBONIS is the solution, tested and proven in Industry . . . succeeds where many other methods fail . . . against a long list of irritants encountered.

THE TARBONIS COMPANY
1220 HURON ROAD • CLEVELAND 15, OHIO

for de-icing equipment

For years, Mercury has specialized in the production of oil separators for use in connection with the vacuum pump in the de-icing system ...furnishing many thousand units for both Army and Navy aircraft. Especially, if you use oil separator NAF 47089-1, you will be interested in our service on this widely used product.

•

aluminum fuel and oil tanks • ailerons, fins, rudders and similar surfaces • aircraft parts and accessories.

AT *The Cradle of Aviation*
MERCURY AIRCRAFT INC.
HAMMONDSPORT · NEW YORK

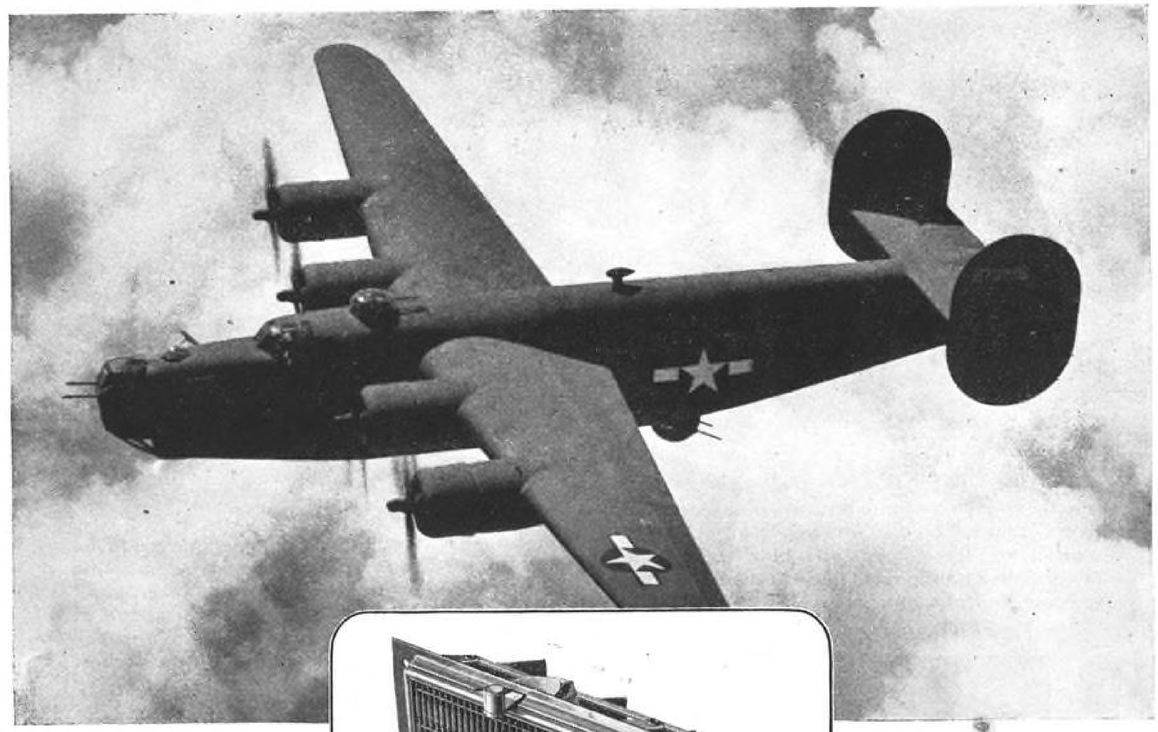

Consolidated Vultee "Liberator" B-24 four-engine heavy bomber. Photo by Otto Menge, courtesy Consolidated Vultee Aircraft Corp. (War Dept. release.)

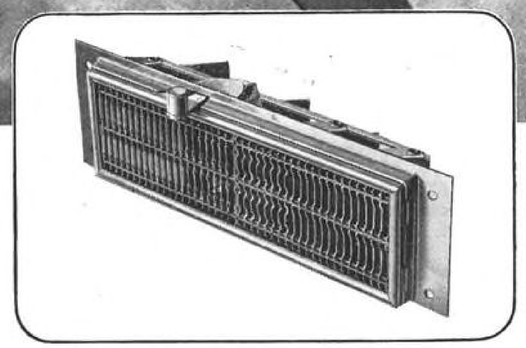

Barber-Colman aluminum UNI-FLO four-way diffusing grille with adjustable graduated scoop damper, used in cabin heating on the "Liberator."

uni-flo GRILLES FOR "LIBERATOR" CABIN HEATING

THE famous B-24, Consolidated Vultee's great "Liberator," is a heavy, long range bomber that has proved to be an outstanding contributor to the strength of America's air armada. Its operational successes have been told again and again in stories from the fighting fronts all over the world. With four 1200-h.p. turbo-supercharged Pratt & Whitney engines, the plane has a maximum range of over 3000 miles, a cruising speed of over 200 m.p.h. and maximum speed in excess of 300 m.p.h. . . It has been our privilege to contribute toward the efficiency of this airplane, by furnishing the grilles used to distribute heated air to the cabin. Our grille, as shown in the picture above, consists of a four-way UNI-FLO diffusing fin core, set in a suitable frame for mounting in a rectangular duct, and backed by a set of louvers or vanes which can be adjustably positioned by a handle on the face of the grille. These louvers are graduated in length so they act as a scoop to distribute air uniformly to the face of the grille. They are held with a detent at any of four positions. . . This is only one of several types of Barber-Colman air diffusers now being furnished for the heating systems of various outstanding aircraft. Further details of the equipment and its present and potential applications will be furnished on request.

BARBER-COLMAN COMPANY
1221 ROCK STREET · ROCKFORD, ILLINOIS

--AND THIS IS INVASION YEAR!

It is necessary now more than ever for war plants to maintain full production time. To terminate this war in the shortest possible time will require many skilled hands, from those that pull a trigger to those that run a machine. This means looking ahead constantly.

At present, Peck facilities are being employed to the utmost in producing springs and screw machine products. We want to keep them that way. Won't you, therefore, please let us know as far ahead as possible what your future needs are liable to be? Rest assured we will schedule them for the earliest possible delivery.

PECK SPRINGS & SCREW MACHINE PRODUCTS

The Peck Spring Company 30 Summitt St., Plainville, Conn., U.S.A.

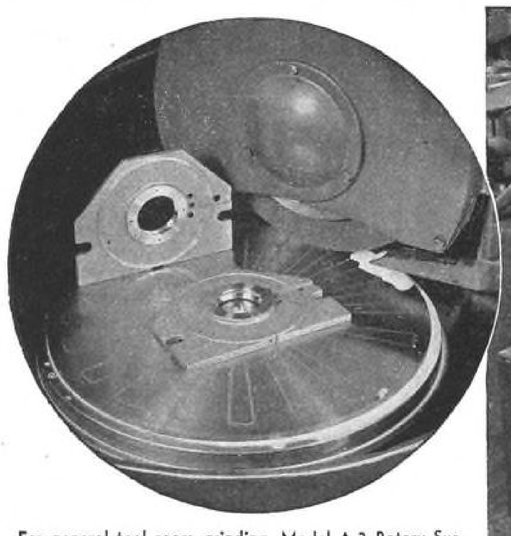

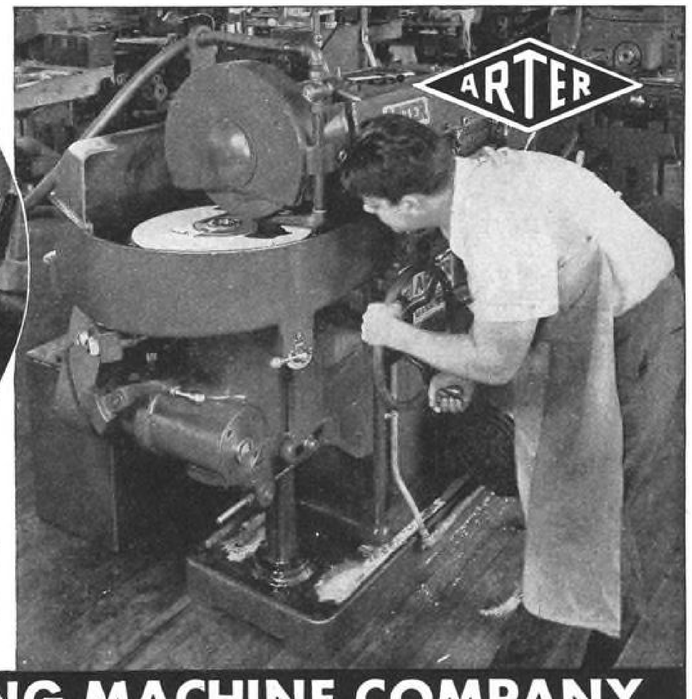

For general tool room grinding. Model A-3 Rotary Surface Grinder at Vinco Corporation, Detroit. Simple to operate . . . produces good finish . . . holds work to close tolerances. Production increase—50 to 100 per cent.

ARTER GRINDING MACHINE COMPANY

WORCESTER, MASSACHUSETTS • U. S. A.

PROPER CLEANING AND RINSING WILL SPEED PRODUCTION AND MINIMIZE REJECTIONS

WHEREVER STEEL IS REQUIRED IN CREATING WAR EQUIPMENT. Metal fabricators and inspectors will find the cause of much unsatisfactory finish to be ineffective rinsing.

Chemically Clean metal surfaces and why essential, before protective finishes are applied, were discussed in a recent issue*. One more step, the Final Rinse, must be efficiently performed to insure satisfactory results.

The Final Rinse has a profound and critical effect on the corrosion resistance of the final finish. No matter what general method of cleaning is employed, the removal of the cleaning agent itself, together with the contaminants picked up from the metal, is a very critical step in the cleaning operation. Water-soluble salts, objectionable acids and bases constitute the most usual and serious of the invisible, latently harmful surface contaminants spoken of previously.

Almost all cleaning chemicals contain such substances, which are absorbed more or less strongly by the steel surface, and are rinsed off with difficulty. It is, moreover, very difficult to keep rinse water free of these . . . besides, all natural waters contain dissolved salts in greater or less amounts. Obviously, whatever remains on the surface after the rinsing, and whatever is dissolved or suspended in the rinse water film adhering to the surface, still remains when the surface is dried. Traces of alkaline, saline, or water-soluble material in general, even such amounts as may be present in tap water, left on steel surfaces are harmful to paint film.

The Final Rinse following one or more rinses in clear water should be a neutralizing rinse (preferably hot to assist subsequent drying) and contain substances to neutralize and destroy any carried-over alkali or alkaline salt on the surface of the work, or present in the rinse water so that no corrosion stimulative material will remain.

This final rinse should be on the acid side of neutrality, having a pH between 3 and 5 and contain suitable agents to cause the rinse water to drain off in an even film without leaving droplets to dry irregularly on the surface.

It will appear that, regardless of the type cleaning used, the nature of the final rinsing solution has a profound and critical effect on the corrosion resistance of a final finish. The effect of certain variations in rinsing procedure is shown in the photographs of two series of baked enamel panels which have been exposed to salt spray.

Cleaning in a properly formulated phosphoric acid type cleaner, such as Deoxidine, is superior to other types of cleaning such as alkali cleaning — Compare panels of series 1 with those of series 2.

Rinsing in tap water is less harmful on surfaces cleaned with Deoxidine, than on alkali cleaned surfaces, as may be observed by comparing panel No. 1 in series 1 and 2.

In order to secure the maximum benefit of an organic finish, the final rinse should contain phosphoric or chromic acid with additional draining and drying agents. Compare panels 1-2-3 and 7 in series 1 and 2.

The final rinse must be on the acid side of neutrality. The optimum pH range for maximum film durability is from 3 to 5. The results on Deoxidine cleaned surfaces are better than those on alkali cleaned surfaces.

The effectiveness of chromic or phosphoric acid in overcoming difficulties due to absorbed soluble impurities on steel surfaces is improved when these are used in the form of properly formulated preparations, such as Deoxylyte which is designed for thorough contact with the surface, uniform drainage and more rapid and uniform drying.

*A reprint of the previous cleaning article will be sent on request.

EFFECT OF VARIOUS RINSING CONDITIONS

LOW BAKED UREA-FORMALDEHYDE RESIN ENAMEL — 40 HOURS SALTSPRAY EXPOSURE

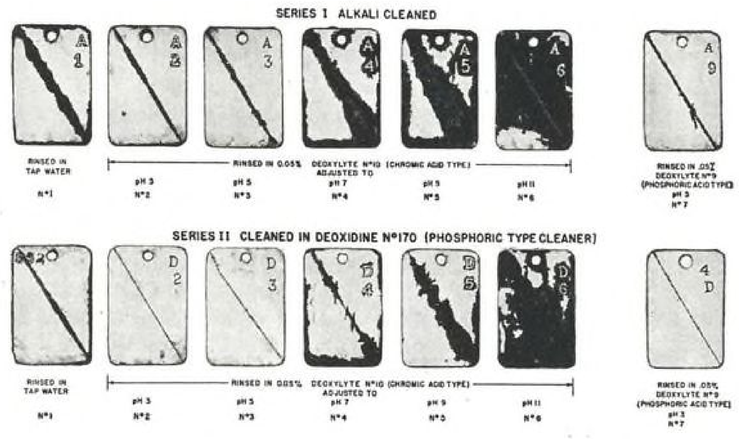

Descriptive literature covering application of Deoxidine and Deoxylyte in cleaning and rinsing operations will be sent free on request to

AMERICAN CHEMICAL PAINT CO., Ambler, Pa.

Please send me general Technical Service Data Sheets on

*Name*_____ *Title*_____ ☐ DEOXIDINE

*Company*_____ ☐ DEOXYLYTE

*Address*_____ J-5

IN AIRCRAFT VISION for VICTORY

with a

LIBERTY AIRCRAFT MIRROR

The pilots of thousands of Allied fighter planes, now in action over our widely scattered battle fronts, are getting a perfect image of things behind them without eye-strain or fatigue, by means of Liberty Aircraft Mirrors.

Liberty Aircraft Mirrors are all first surface mirrors, and as permanent as their glass base. They give the pilot a clean, well defined image without distortion, immediately.

Each fighter plane equipped with a Liberty Mirror has a mirror built to meet the specific requirements of that plane. Thus the pilot changing from one plane to another gets uniformly good vision at all times, in all planes.

All Liberty Mirrors are now built only for War service, but later these battle tested vision devices will be available to all operators, military, transport or private.

LIBERTY
MIRROR DIVISION
LIBBEY-OWENS-FORD GLASS COMPANY

BRACKENRIDGE PENNSYLVANIA

The Army - Navy "E" was awarded Liberty "For high achievement in the production of war material".

WINGS FOR WIRY JOE



WIRY JOE has taken to the air! Long famous as the largest independent manufacturer of automotive replacement wiring, Wiry Joe today is an important source of aviation wire and cable.

Produced under the Dostam method of manufacture, to assure uniformity . . . dependability . . . high efficiency . . . long life, Wiry Joe electrical wire and cable for aircraft conforms fully with rigid Army and Navy specifications.

Inquiries concerning electrical wire and cable for any type of service—aviation, marine, automotive, industrial—will receive prompt answer.

Wiry Joe

AVIATION CABLE

manufactured by

THE CRESCENT COMPANY, INC.

Pawtucket, Rhode Island

BROKEN DRILL ADAPTER 98c

Designed to save drills, time, labor and expense. All sizes. No soldering or set screws. Patented self-locking device assures firm grip in perfect alignment, also permits easy ejection of drill.

BROKEN DRILL For Angle & Snake Drilling CHUCK 68c

This self-locking flute key chuck permits use of broken drills without soldering, sweating or set screws. Drilling vibration increases grip. Can't come loose or off centre. Especially designed for angle drilling. Standard sizes for generally used drills. Wire your order number for immediate delivery of trial lot.

TAPE PRINTER $98

Printing your own Shipping Labels, Stockroom package labels, parts and material labels. Use easy to get gummed paper tape. Every Aircraft — Warplant — Shipbuilder, prime contractor or sub-contractor should have one of these practical printers in each department. $98.00 F.O.B. Towson, Md., or St. Louis, Mo., buys all necessary equipment, including ink, type and spare parts. Wire your order number.

RIVNUT KEY SEATING TOOL

Replaces broaching process in installation of "De Icer Boots." No Burrs! Accurate Placement! Seat depth control! Efficient new features of this tool that make it vital in any plant requiring non-rotating lugs. Easier to use, does a better job.

ONE-PIECE DIMPLING TOOL

No cracks, no distortion, flat surfaces. Single piece male punch requires no adjusting. Impossible to offset perfect accuracy. The tool is always right—it's made right. It is designed for universal nesting Solves the problems of S.T. and S.O. materials. Specializing in A.N. 100° rivets. Specially designed for skin and rib dimpling.

Topflight Tool Co.

AIRCRAFT TOOLS

Chestnut Ave. P. O. Box 6728

TOWSON 4, MARYLAND

Administration Offices: Phone Towson 1169

UNBRAKO

REG. U. S. PAT. OFF.

INTERNAL WRENCHING BOLTS FOR THE AIRCRAFT INDUSTRY

National Aeronautical Standard

"Unbrako" Internal Wrenching Bolts are being manufactured by our largest and best equipped department, where only the most highly skilled workers experienced in making precision aircraft engine parts are employed. The bolts are extremely accurate, being made to unusually close tolerances. They are now being used by some of the largest aircraft manufacturers.

Backed by the "Unbrako" name and reputation, our Internal Wrenching Bolts can be bought and used with all the confidence inspired by actual performance of the vital aircraft engine parts produced by us.

100° FLUSH-HEAD SOCKET BOLTS

Unlike ordinary flush-heads, "Unbrako" 100° Flush-Head Socket Bolts are made to most extreme accuracy.

OVER 40 YEARS IN BUSINESS

STANDARD PRESSED STEEL CO.

JENKINTOWN, PENNA., BOX 566 • BRANCHES: BOSTON • DETROIT • INDIANAPOLIS • CHICAGO • ST. LOUIS • SAN FRANCISCO

How to test, repair and service airplanes

especially of the thin-sheet-metal type

Here is a book that airplane mechanics and those studying to become mechanics will welcome as a complete guide to upkeep and repair methods on big modern air liners of the thin-sheet-metal type. More than 50 experts have assisted in this book which gives instructions, data, diagrams, typical job assignments; everything you need for more rapid advancement in ground school or as a constantly useful reference to details and methods for many kinds of jobs that come up in the repair shops of national and international air lines.

Just Published! *New Second Edition!*

Airplane Maintenance

A Textbook for Airplane Mechanics

BY JOHN E. YOUNGER
Consulting Aeronautical Engineer, Professor of Mechanical Engineering, University of Maryland

ALLAN F. BONNALIE AND
Commander, USNR, recently Asst. Exec. Vice-President Operations, United Air Lines

NAIRNE F. WARD
Consulting Welding Engineer, Beech Aircraft Co.

Second Edition, 361 pages, 5¼ x 8¼, 232 illustrations. $3.00

• The book will give you a specialized knowledge of the airplane itself; body, wings, landing gear, propeller, etc.; everything except motors and instruments.

Look up in this book

- servicing of shock absorbers
- sound-proofing of airplanes
- welding of aluminum sheets
- maintenance hints on brakes
- cleaning of fuselages
- de-icers
- repair of engine nacelle
- repair of fabric structures
- causes of failure of repairs
- removal of flux
- methods of hard surfacing
- major repair of propellers
- repair of longeron
- testing riveted joints
- repair of struts
- tension test of metals
- welding of fish plate
- welding jigs
- repair of leading edge, ribs, flange of wings, etc., etc.

McGRAW-HILL ON-APPROVAL COUPON

McGRAW-HILL BOOK CO., Inc., 330 W. 42nd St., New York 18, N. Y.
Send me Younger, Bonnalie, and Ward's AIRPLANE MAINTENANCE for 10 days' examination on approval. In 10 days I will send $3.00, plus few cents postage, or return book postpaid. (Postage paid on cash orders.)

Name .....

Address .....

City and State .....

Position .....

Company ..... Av. 5-44

(Books sent on approval in U. S. and Canada only.)

WHERE ONE SPARK MEANS Fire

JUSTRITE means real safety

Wherever flammable or touchy liquids are being handled, there is danger of fire. This is especially true if proper containers are *not* used.

That is why Justrite Safety Products are Industry's favorite . . . they offer the safe, sensible means of handling dangerous materials. The Justrite Safety Can and Safety Filling Can reduce hazards when working with volatile liquids. The Justrite Oily Waste Can stores oily grimy waste safely.

Put Justrite to work in your plant protecting employees, for the safety of equipment, the conservation of materials and maintenance of vital war production.

Safety Can

Oily Waste Can

Safety Filling Can

These Justrite Safety Products carry the approval of Underwriters' Laboratories, Inc. and Associated Factory Mutual Fire Insurance Companies.

Write today for complete information

JUSTRITE MANUFACTURING COMPANY
2063 N. Southport Avenue, Dept. E-1, Chicago, Ill.

JUSTRITE *Safety Products*

SAFETY CANS · FILLING CANS · OILY WASTE CANS
APPROVED SAFETY ELECTRIC LANTERNS

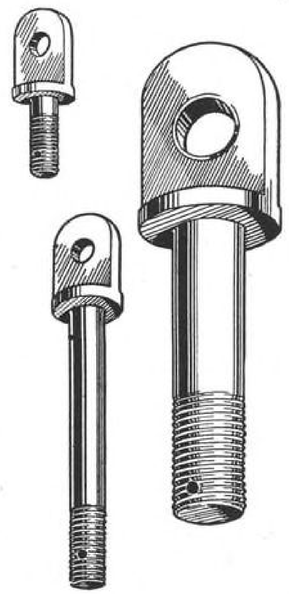

NEED EYEBOLTS–BOLTS–NUTS?

Don't let a simple part hold up the production of vital planes. You can get them so easily and quickly from OHIO Aircraft Hardware Company.

Our stock includes a full range of eyebolt sizes—AN 42 through AN 49 inclusive, in all lengths.

We also manufacture the entire range of aircraft bolts, clevis pins and nuts, and can deliver turnbuckles in limited quantities.

All items are screw machine products.

QUICK DELIVERY

For your urgent requirements most sizes are stocked—and we can give 15 day delivery on any size.

***Before* you file a Critical Shortage Report—Phone—Wire or Write us.**

OHIO

AIRCRAFT HARDWARE COMPANY

1549 Superior Ave.
Phone—Main 8158
Cleveland 14, Ohio

. . . for better clearance

Here's one of the many Plomb Tools that are speeding war work.

It represents the most compact line of Offset Box Wrenches on the market — covering the greatest number of opening sizes with the minimum number of wrenches — available in both long and short types.

Features like this make Plomb Tools the choice of professional mechanics in all industries. You will find the tools you need at Plomb dealers, everywhere. *Plomb Tool Co., Los Angeles 54, Calif.*

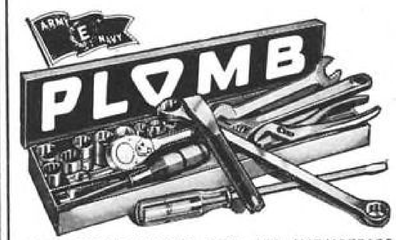

FINE HAND TOOLS FOR ALL INDUSTRIES

Here's High Strength / Weight Ratio for Tubular Parts . . .

Designers find that the *uniform wall thickness* of Carpenter Welded Stainless Tubing permits the use of *lighter gauges* without sacrifice of strength. When designing with Stainless Tubing take advantage of the *high strength/weight ratio* of Carpenter Welded Alloy Tubing—save precious weight and space, strengthen parts, build more compact assemblies.

Along with high strength/weight ratio, Carpenter Welded Stainless Tubing can give your products positive heat and corrosion resistance. There are no thin spots to "give out" under heat, corrosion, pressure or wear. And the uniform structure of this tubing, formed from cold rolled strip, helps to eliminate production "bugs". Parts can often be finish-formed by merely swaging, tapering, flanging or expanding.

Carpenter pioneered this type of tubing and is ready to help you apply it to your specific job requirements. Take advantage of Carpenter's diversified experience with aircraft design-engineering problems involving the use of Stainless Tubing.

USE THIS FOLDER . . .

to help you select the type of Welded Stainless Tubing for your needs. It contains data on physical properties, corrosion resistance qualities, sizes and shapes available. Just drop us a line on your company letterhead.

THE CARPENTER STEEL COMPANY
Welded Alloy Tube Division . . Kenilworth, N. J.

Carpenter
WELDED STAINLESS TUBING

FIGHT WASTE!

OFFICIAL U.S. GOVERNMENT PROGRAM

HELP WIN THE WAR!

ELECTRICITY... Turn off lights when not needed

COMMUNICATIONS... Don't make unnecessary long distance phone calls

WATER... Don't let water run needlessly

TRANSPORTATION... War traffic comes first... travel only when you must

HOME OF THE

Hotel Hawaiian Room Lexington

Charles E. Rochester, V. P. & Mng. Dir.

LEXINGTON AVE. at 48th ST., N. Y. C. 17

B-H

MANUFACTURERS OF SHEET METAL AND TUBULAR ACCESSORIES

OARS AND PUMPS

CONTRACTORS TO ALL LEADING ENGINE AND PROPELLER MANUFACTURERS

B-H AIRCRAFT CO., Inc.

LONG ISLAND CITY 1, N. Y.

WE'RE HOLDING YOUR FREE COPY FOR YOU

THIS new up-to-the-minute bulletin will be one of the handiest reference manuals ever to hit your desk. Here in one spot you'll find, clearly described and illustrated, most of the available Radius Charts, Protractor Charts, Projector Scales and Projector Rules to help you in your optical comparator, shadowgraph and measuring and micro projector work. Your copy is waiting for you; write for it today.

ENGINEERS' SPECIALTIES DIVISION

UNIVERSAL ENGRAVING & COLORPLATE COMPANY, INC.

500 MONROE STREET, BUFFALO 11, NEW YORK — TWIN PLANTS — 1919 EAST 13TH ST., CLEVELAND 15, OHIO

BALDOR BALL BEARING GRINDERS

BALDOR Pedestal Grinder No. 121; 2 HP ball-bearing motor, 1725 rpm; complete with 12" x 12 x 2 wheels and starter.

BALDOR ELECTRIC COMPANY

4380 Duncan Ave. ST. LOUIS 10, MO.

Manufacturers of
Electric Motors
Electric Motor Grinders
Battery Chargers
Fast Battery Chargers
Battery Testers

Write for Bulletins

SCREWS

Just "knowing how" is not enough.

Only to a few is granted that combination of experience, organization and equipment which sets them apart as specialists.

We can rightfully claim that distinction — we are specialists in screw production. If you have a special screw problem, consult us.

NEW ENGLAND SCREW CO.

KEENE, NEW HAMPSHIRE

MACHINE SCREWS — PLASTIC INSETS
SHEET METAL SCREWS — HOLDING PINS
MACHINE SCREW NUTS — SPECIAL RIVETS
ALL TYPES OF HEADS AND THREADS

AVIQUIPO AROUND THE WORLD

"AN"
STANDARD PARTS
CONTRACTORS
TO THE
AVIATION INDUSTRY

SEND FOR
CATALOG No. A-102

AVIQUIPO

25 Beaver Street, New York 4, N. Y.

CRUCIBLE

Let SWAN do your

PIPE and TUBE BENDING

TO FIT YOUR PRODUCTION SCHEDULE

Bending, Coiling, Expanding, Flattening, Brazing, Welding are **SWAN** *Specialties*

If there's a pipe or tube bending or fabricating operation in your production job, send the work to SWAN. We are completely equipped to handle it, whether it is machine or hand bending, in quantity lots or on a small scale for strictly confidential experimental work. And we'll turn out the work fast to fit into your production schedule.

Our free advisory engineering service is always available to help you with problems involving bending and fabricating, and designing, assembling and testing, too. Write or wire for further information.

SWAN ENGINEERING COMPANY, Inc.

744 Frelinghuysen Avenue — Newark 5, N. J.

Filtrine HIGH EFFICIENCY **WATER COOLERS**

Designed especially for war plant cafeterias. Only storage type water Coolers (without pre-coolers) minimum 25 gal. cold water storage will meet lunch-time cold water demand. Filtrine Coolers have capacity of 85 gals. in two hours—1360 8-oz. glasses. Sturdy metal top for supporting glasses. White Duco finish or to match your own color scheme. Write for particulars.

FILTRINE MANUFACTURING COMPANY

53 Lexington Ave. — Brooklyn 5, N. Y.

"Manufacturing Cooling Equipment for 40 Years"

Energetic Sales Representation

for **Aviation Equipment**

Contacting regularly the engineering and purchasing departments of the huge airplane plants located in these mid-western cities, we offer you NOW, sales representation that will pay dividends in the post-war period. Well financed with facilities for handling stocks. Investigate how we can protect YOUR future sales.

NELSON ELECTRIC SUPPLY CO.

TULSA, OKLAHOMA

TULSA
OKLAHOMA CITY
WICHITA
DALLAS
FT. WORTH

Small but LUSTY

You get maximum power per ounce of weight in this small fractional H.P. Motor. Designed for speeds from 3,000 to 20,000 R.P.M. and for voltages from 6 to 115. Engineered to your exact performance specifications. Precision-built of quality materials for long life, dependable operation. How many do you need—and when?

Small Motors, Inc.

1312 ELSTON AVE., CHICAGO 22, ILLINOIS

Manufacturers of special small universal, fractional H.P. motors, dynamotors, shaded pole motors, heater motors, generators.

Design · Engineering · Production

OUR PURPOSE

To Help You Produce a Finer Product

This can be done only by controlling the sizes of threaded holes and screws with quality gages.

All Army-Navy Aeronautical Taper Pipe Thread Gages are made in closest accordance with Specifications AN-GGG-P-363 for inspection of aircraft fuel and oil lines.

Only the finest of specially heat-treated tool steels are used, giving you gages which will last longer.

SPECIFY Republic Gage A.N.P.T. Taper Pipe Thread Gages.

L1 Taper Pipe With Three Steps — *L3 Taper Pipe With Three Steps*



6—Step Plain Taper Pipe

REPUBLIC GAGE CO.

2228 FENKELL AVENUE
DETROIT 21, MICHIGAN
PHONE UNiversity 1-0370

PRECISION MATERIALS-HANDLING *for* **AIR CARGO**

Photo Courtesy Curtiss & P. Ballantine & Sons

Air Transport officials choose the Krane Kar for its precision performance . . . fast traveling; fast boom swinging and topping; fast load hoisting and lowering . . . these functions operable independently or simultaneously; the always-in-gear design; automatic braking in all crane operations; and the self-stabilizing feature for safety when handling loads at sides.

Write for Literature.

2½, 5, & 10 TON CAP.
Krane kar
SILENT HOIST WINCH & CRANE CO.
846-63rd ST., BROOKLYN, N.Y.

Talk About PRODUCTION Without DIES!

4,000 Parts Per Day with DI-ACRO BENDER

"Enclosed picture in our plant proves the DI-ACRO Bender will do a real production job. We are making 4,000 completed parts per day which is competitive to most Power Presses." (Name on Request.)

Here is an example of "DIE-LESS DUPLICATING" typical of a great variety of formed parts readily made with DI-ACRO Precision Machines,— Benders, Brakes, Shears. Picture above shows the finished part formed to die precision. Women operating DI-ACRO units maintain a high out-put on production work.

DI-ACRO BENDER No. 1

DI-ACRO Send for Catalog

O'NEIL-IRWIN MFG. CO.
358 Eighth Avenue So., Minneapolis 15, Minn.

EBERHARD FABER

A famous name by which to select
Erasers for All Purposes

- Soft Pencil Erasers
- Soft Ink Erasers
- Ink and Pencil Erasers
- Typewriter Erasers
- Gum Cleaners
- Kneaded Rubber

Say "EBERHARD FABER" in specifying eraser purchases

SENSENICH

REPAIR SERVICE—Complete facilities for the service and repair of wood propellers are available at the main plant, Lititz, and West Coast branch.

Out on Top of the Grumman Widgeon



AIRCRAFT SENSENICH PROPELLERS

Adjacent to Lancaster Municipal Airport, Lititz, Pennsylvania—West Coast Branch, Glendale, California

LET THIS "ROBOT" OPEN *and* CLOSE YOUR DOORS



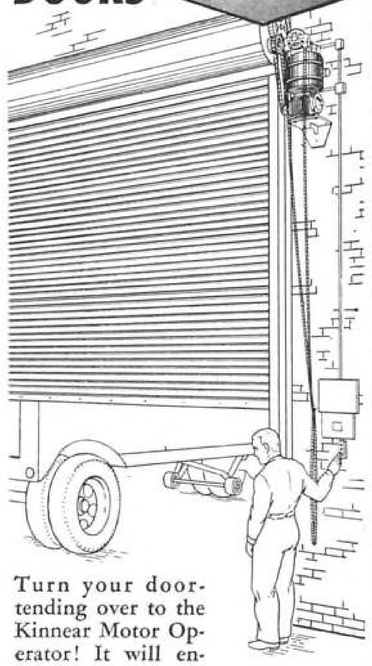

Turn your door-tending over to the Kinnear Motor Operator! It will enable you to raise and lower doors by merely touching a button. You'll speed up door traffic and save time and labor. You'll also save on heating and air-conditioning costs because doors won't be left open through neglect. Look at some of the construction features of the rugged Kinnear Motor Operator: machine-cut gears of chilled nickel bronze, worms of nickel steel, bronze and graphite oilless bearings —proof that it's engineered for long, faithful service! And every Kinnear Motor Operator is matched to the load requirements of the particular door with which it is to be used. Write for details today. And if you're not already obtaining all the special advantages of Kinnear Rolling Doors, you'll want information on them too. The Kinnear Mfg. Co., 1440-60 Fields Ave., Columbus 16, Ohio.

SAVING WAYS IN DOORWAYS

KINNEAR ROLLING DOORS

THE HELMET FOR WOMEN WELDERS

Designed to meet the increasing demand of women workers, this helmet is smaller and considerably lighter than regular helmets, and has a SNOOD of closely woven fabric to protect the hair, top of head and back of neck. Another women's model, but without the snood, is our *new* No. 245. Both have roomy rounded fronts, are strongly made, comfortable and well ventilated.

Sellstrom MANUFACTURING COMPANY
663-5 N. Aberdeen St. Chicago 22, Ill.

Write FOR CATALOG

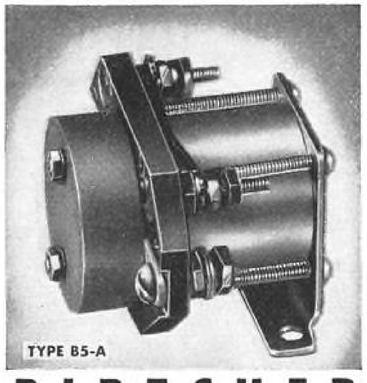

BIRTCHER AIRCRAFT RELAYS

Meets Army Air Corps Specifications 94-32351-A and other applicable specifications

PROMPT DELIVERY!

THE BIRTCHER CORPORATION
Manufacturers of AIRCRAFT and RADIO PARTS
5087 HUNTINGTON DR. LOS ANGELES 32

He needs...

clean, dry gasoline 99.999% water-free*

Pilots want to take the air in safety with no water worries. ***For they know from experience that the fuel lines of the airlines are their lifelines.***

Excel-So Water Separators are for use on all airport refueling systems, where Excel-So compactness affords ease of installation, or change-over from existing equipment . . . ***giving maximum water removal efficiency, unmatched by any other type units.***

Coalescing Zone helps keep fuel lines clear



Only in Excel-So Separators is found the COALESCING ZONE with the special Excel-So Separating Media (patents applied for), that first, coalesces the most finely divided gasoline/water emulsions and second, filters minute particles of silt, rust, muck, pipe scale, etc. Most separators rely solely on the settling chamber.

Excel-So Separators are designed in sizes from 25 to 1000 gpm, at operating pressures from 20 to 1000 lbs., with pressure drops not to exceed 5 lbs. Also designed to handle ***Diesel fuels and kerosene.*** Write us covering your water removal problems submitting your operating conditions. ***Bulletin No. 2007 on request.***

***TransFUELsion:** Excel-So's Method that guarantees clean, dry gasoline containing not more than 1/500 of 1% water, free or emulsified. Government Testing Engineers, after tests involving millions of gallons of leaded and unleaded high grade aviation fuels, found that Excel-So delivers gasoline 99.999% water-free.

WARNER LEWIS COMPANY
Box 3096, Tulsa-8, Oklahoma, Tel. 4-3176
710 14th Street, N.W., Washington-5, D. C.
Telephone: District 8585

Solve your problems in aircraft navigation

with these *expert* and *scientific* methods

As useful for beginners as for those already engaged in long-range navigation, this book provides complete practical training in aircraft navigation and offers a critical and valuable analysis of many practical flight problems. Based on actual flight experiences of the author, the book presents a simple yet comprehensive analysis of the air navigator's problems from the time the flight is first planned until the destination is reached.

JUST PUBLISHED!

Basic Air Navigation

By ELBERT F. BLACKBURN
Chief Navigation Instructor, Atlantic Division, Pan American Airways System

300 pages, 6 x 9, 325 illustrations, $4.00

In a direct and orderly approach to aircraft navigation, the book begins by pointing out the navigator's basic problem of determining the wind, and his plane's position for this purpose, and explains the six practical solutions of the triangle of velocities.

It covers pre-flight duties for both domestic and ocean navigators—explain flight instruments and their use—discusses in detail radio aids to navigation—tells how to plot and use correctly aircraft lines of position—and includes informative and understandable explanations of the radius of action, interception, the principles and practice of celestial navigation, and the care and use of navigation instruments.

Finally there are practical suggestions for the navigator on pre-flight, flight, and approach routine. Here is the specific information you need to help you solve your problems in aircraft navigation.

Read this list of chapters

1. The Basic Problem of the Navigator
2. Pre-flight Duty of the Domestic Airline Navigator
3. Pre-flight Duty of the Ocean Navigator
4. Flight Instruments and Their Use
5. Radio Aids to Navigation
6. Lines of Position and Their Use
7. Radius of Action and Interception
8. Principles of Celestial Navigation
9. Practice of Celestial Navigation
10. Use, Care, and Calibration of Navigation Instruments
11. Practical Suggestions to the Navigator

10 DAYS' FREE EXAMINATION

McGRAW-HILL BOOK COMPANY, Inc.,
330 W. 42 St., N. Y. C. 18

Send me Blackburn—Basic Air Navigation for 10 days' examination on approval. At the end of 10 days I will send $4.00, plus few cents postage, or return book postpaid. (We pay postage on orders accompanied by remittances.)

Name .....
Address .....
City and State .....
Position .....
Company .....AV. 5-44
(Books sent on approval in U. S. and Canada only.)

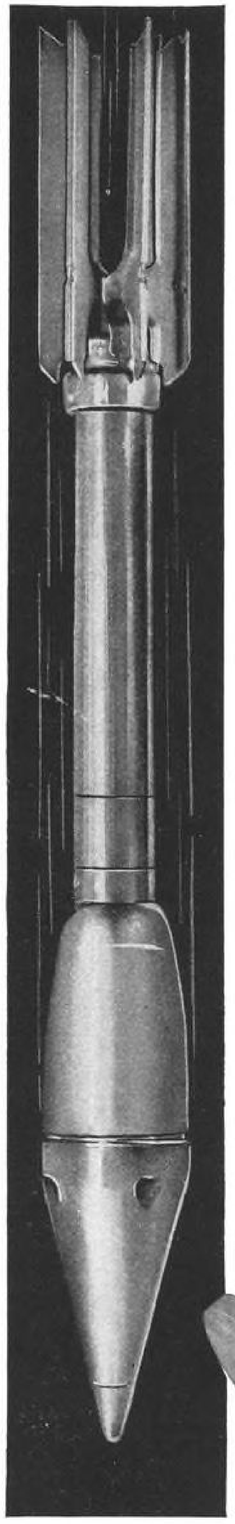

BAZOOKAS and BOMBERS

Wind-resistance must be reduced to a minimum in bazooka shells and bomber wings — rubber-cushioned Brightboy Abrasives get the call for the close-tolerance de-burring, finishing and polishing of these vital implements of war.

Brightboy abrasive is impregnated throughout the binder; the resiliency of the rubber *controls* the abrasive action. *In a single operation*, Brightboy does an all-in-one job—bridging the gap between the grind and the buff. The finish frequently serves as the final polish. Brightboy is made in a wide variety of shapes and sizes for machine and manual work.

Ask our Service Department or field representatives how to save time—improve quality—in your abrasive finishing. Ask your dealer for prices and Applications Data.

BRIGHTBOY INDUSTRIAL DIVISION
Weldon Roberts Rubber Co., Newark 7, N. J.

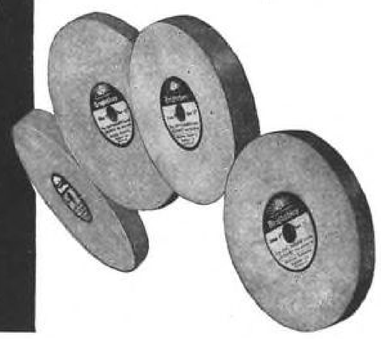

WELDON ROBERTS
Brightboy

DUMB DORA'S GETTING SMARTER AND SMARTER

She's Found 101 New Uses For *SPEEDI-DRI*

SPEEDI-DRI is the finest product of its kind for removing oil and grease from floors; setting up a non-skid surface, and retarding fire. But 101 new uses for SPEEDI-DRI have been discovered! SPEEDI-DRI reclaims oil-soaked rope and power belts; reconditions oil-soaked shoes and clothing; deodorizes the plant; removes oil film from tools; is used during tumbling and after heat-treating processed parts to remove oil-film; increases light reflection in dark plants; helps prevent dermatitis caused by oil-soaked shoes; dries up floors that "bleed" in hot weather; better than sand in fire buckets. You'll discover many other uses for it, too. It's indispensable! Write at once for literature and FREE SAMPLE.

SUPPLIERS: East — Refiners Lubricating Co., New York 1, New York.
Midwest & South — Waverly Petroleum Products Co., Philadelphia 6, Pa.
West — Waverly Petroleum Products Co., Russ Bldg., San Francisco 4, Calif.

SPEEDI-DRI
OIL AND GREASE ABSORBENT

New COPYING SPEED

This booklet tells you how to do hard copying jobs the modern way

HUNTER *Electro-* COPYIST

- **Restores faded, worn or torn tracings.**
- **Emphasis of detail without retouching.**
- **Blanks sections to alter copies without altering original.**
- **Full - shaded isometrics reproduced with perfect definition of tone.**
- **Many engineering shortcuts explained in new booklet. Send for your copy today.**

Hunter Electro-Copyists are taking a big load off the shoulders of work-swamped drafting rooms, making extra-sharp prints from pencil drawings or direct from blueprints, turning out perfect machine-made tracings in minutes, eliminating checking and proof-reading, delivering clear reproductions of anything written, printed, drawn or photographed with unmatched speed.

There is a Hunter Electro-Copyist for every copying need—from the portable office models to special units that take originals up to 48" x 168". All are so simple your office boy can operate them. Write for booklet today.

HUNTER
Electro-Copyist, Inc.
476 S. Warren St. Syracuse 2, N. Y.

WHEN YOU CHECK UP ON YOUR PLANT'S PAY-ROLL SAVINGS PLAN FIGURES!

These days, things change with astonishing speed. The Pay-Roll Savings Plan set-up that appeared to be an outstanding job a short time ago, may be less than satisfactory today.

How about checking up on the situation in *your* plant? Checking up to see if everybody is playing his, or her, part to the full measure of his, or her, ability. Checking up to see if 'multiple-salary-families' are setting correspondingly multiple-savings records.

A number of other groups may need attention. For example, workers who have come in since your plant's last concerted bond effort. Or, those who have been advanced in position and pay, but who may not have advanced their bond buying accordingly. Or even those few who have never taken part in the plan at all. A little planned selling may step contributions up materially.

But your job isn't finished, even when you've jacked participation in your Pay-Roll Savings Plan up to the very top. You've still got a job before you—and a big one! It's the task of educating your workers to the necessity of not only buying bonds, but of *holding* them. Of teaching your people that a bond sold before full maturity is a bond robbed of its chance to return its full value to its owner—or to his country!

So won't you start *checking* . . . and *teaching* . . . today?

War Bonds To Have And To Hold!

LET'S ALL BACK THE ATTACK WITH WAR BONDS!

The Treasury Department acknowledges with appreciation the publication of this message by

AVIATION

This is an official U. S. Treasury advertisement—prepared under auspices of Treasury Department and War Advertising Council

Here's Your Post-War Model Now

. . . the New Scott

Automatic, Steerable and Full-Swivel

Tail Wheel Assembly

(MODEL 3-24)

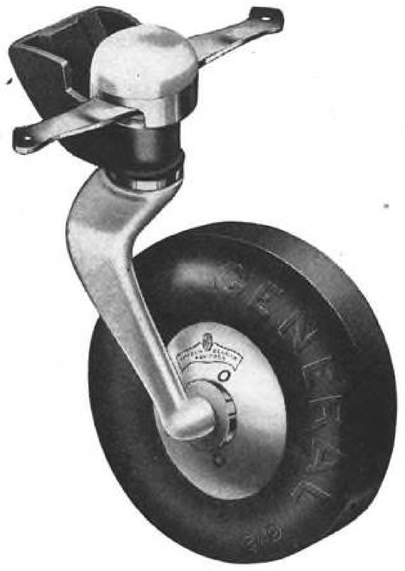

● You have long had the need. Three years ago Scott Engineers began to design, build and test automatic steerable and full swivel tail wheel assemblies to meet that need. Today—the new Scott "3-24" Tail Wheel Assembly is a perfected and practical reality—ready for service on nearly all makes of light aircraft.

Providing the inherent safety and maneuverability in taxiing of the steerable type, including more effective control in strong cross-winds, this new model also provides the advantages of the full swivel assemblies: easier ground handling . . . sharper taxiing turns . . . protection against damage to parts from severe usage . . .

Thoroughly tested for field service, the Scott "3-24" stands out as an advanced development embodying the greatest number of potential service hours ever built into a tail wheel assembly!

1 Rugged Universal Belectromal Bracket fits both 1½" and 1¼" spring leaves.

2 Patented Automatic Mechanism—dependable, long-wearing, protected by streamlined steel cap.

3 Large area Hard Bronze Swivel Bushing, grooved for lubrication, easily replaced, sealed with metal dust cap.

4 Single Arm fork of drop forged chrome alloy, gives maximum freedom from mud and ice accumulation.

5 Wheel: High-strength aluminum alloy castings rigidly locked with three AN bolts. Large Timkin Roller Bearings, grease packed for long life. Felt grease seals and tight dust caps.

6 Tire: 6 x 2 solid cushion with steel wire bead. Can't come off.

Available from authorized Scott Distributors or from Scott Chartered Dealers

Get Details! Here's post-war thinking too—a practical, profitable dealer program for post-war selling. *Full explanation on request.*

Scott AVIATION CORPORATION Lancaster, N. Y., U. S. A.

SCOTT AVIATION CORPORATION

214 Erie Street Lancaster, N. Y.

Speed Up

PLANE PRODUCTION!

Pan American Airways use Ruemelin equipment in their Maintenance Dept. for overhauling transport planes.

Sand blast landing gear parts and sub-assemblies with this highly efficient sand blasting equipment.

Both Uncle Sam and air transport companies need more planes, and need them in a hurry. To speed up production, aircraft manufacturers are finding Ruemelin Blast Generators a valuable aid. Parts can be cleaned in a jiffy, after welding or annealing. Either sand or steel abrasives can be used. Simple to operate. No skilled labor needed. Built for long, continuous, trouble-free service. Widely used by U. S. Government air defense forces and private airports for maintenance work. Many sizes available. Portable or stationary. Ask for Bulletin 36-B.

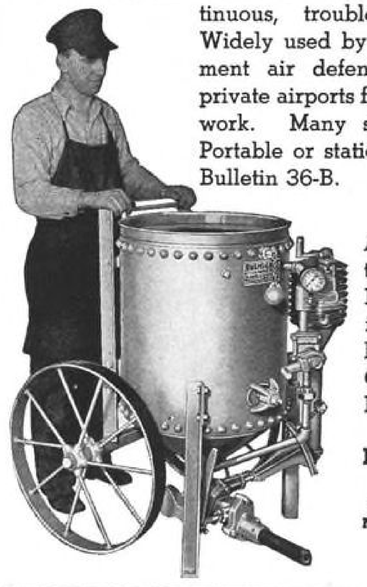

●

Also Manufacturers of Dust Filters, Welding Fume Collectors and Compressed Air Dryer Systems.

RUEMELIN MFG. CO.,
3875 N. Palmer St.
Milwaukee 12, Wis.

RUEMELIN BLAST GENERATORS

765 Series
SHUT-OFF COCKS

770 Series
DRAIN COCKS

771 Series
DRAIN COCKS

by McDONALD

88 YEARS' EXPERIENCE IN PRECISION MANUFACTURE

Precision-made to rigid Army-Navy Aeronautical specifications, and available in sizes and types to meet all requirements. Write for special folder.

A. Y. McDonald Mfg. Co.
Dubuque, Iowa

McDonald
AIRCRAFT VALVES

HOW MUCH LESS PAPER CAN YOU USE IN YOUR PLANT?

That's a mighty important question. Paper stocks are seriously low this year, and every time another shipload of paper-wrapped war supplies leaves an American port, the problem gets tougher • The voluntary cuts, the simple economies you have put into operation up to now, won't be half enough in 1944 • The only answer is honest, convincing *paper-pinching* by every one who uses paper • Organize a Paper Conservation Committee in your company. Pick only the best men for this job, and give them a green light so that they can work effectively • From envelopes to heavy cartons, have this Committee see to it that functional packaging is the order of the day—every day • In the panel are suggested many ways your plant can use less paper. But you know your own business best! Go to it *NOW!*

Use Less Paper Because	*Use Less Paper These Ways*
Multiwall paper bags are used extensively in shipping flour and dehydrated foods.	Condense letters and memoranda by (a) keeping margins as narrow as possible; (b) sticking to single-space forms; (c) using reverse side of incoming letters as first carbon copy of replies; (d) using reverse side of second sheets for carbon copies; (e) using both sides of all mimeographed sheets.
All openings and exposed surfaces of tanks are sealed with paper for shipping. Submachine guns are not only paper-wrapped but boxed in paper board. Shell grommets, bomb rings and practice bomb fins are made of paper to save needed steel.	Check carefully to determine whether your shipping container exceeds the requirements of Rule 41 of "consolidated freight classification requirements."
Gas-mask canisters and hand-grenade containers are made of paper.	Eliminate individual cartons in every practical instance.
Paper is used in camouflage strips and netting and parachutes.	When individual cartons are indispensable, pack in bulk whenever possible.
All Army clothing and equipment are shipped in waterproof paper wrappers.	Control disbursement of paper supplies to employees so that excessive quantities do not accumulate in desks and departmental supply closets.

This advertisement prepared under the auspices of the War Advertising Council in co-operation with the Office of War Information and the War Production Board.

LET'S ALL USE LESS PAPER

"Space for this advertisement contributed by AVIATION."

the shape of things to come.... and as they are

Victory rides on flawless small parts of the utmost precision. Callite produced over 6,000 different types of contacts last year—each accurately-engineered for a specific use. Callite Contacts' close tolerances, fine surface finishes, exactness to specifications, C-T's consistently prompt deliveries—combine to help aircraft makers meet urgent schedules.

This intensified wartime experience added to Callite's quarter-century of research and development makes C-T your logical source of supply now . . . and in the future. Callite Tungsten Corporation, 545 39th St., Union City, N. J. Branch Offices: Chicago, Cleveland.

Callite CONTACTS

ARMY NAVY CALLITE TUNGSTEN CT

Standard and Special Shapes in Tungsten, Molybdenum, Silver, Platinum, Palladium, and various Alloys of these metals.

A dependable BAROMETER of engine wear

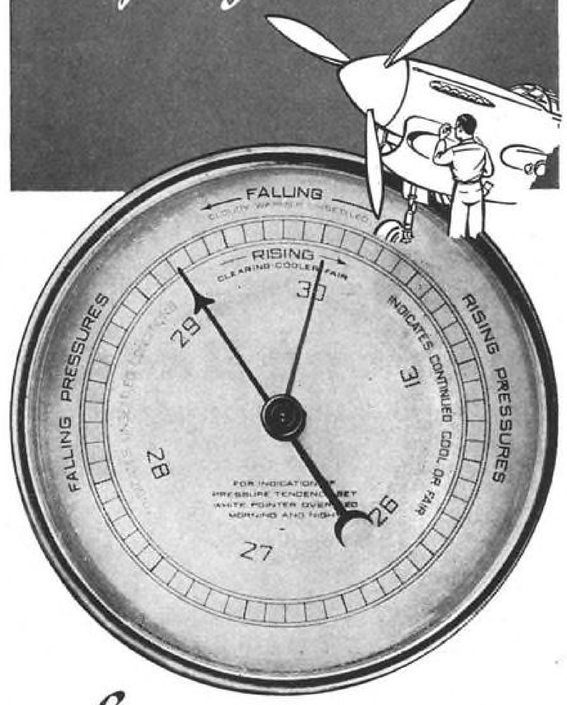

THE LISLE *MAGNETIC* DRAIN PLUG provides a positive warning against undue engine wear. Premature failure of steel or iron parts is revealed by the presence of metallic particles captured from the oil by the powerful magnet. Examination of these cuttings will usually indicate the source of trouble and the point of wear. The use of Lisle Plugs involves no mechanical change as the *MAGNETIC* Plug simply replaces the ordinary drain plug. Engineering data and catalog available to engine designers upon request.

LISLE CORPORATION
Box 1020 • Clarinda, Iowa

Lisle Magnetic DRAIN PLUGS

Let this **NEW** *approach* make **FLYING** *natural,* **SAFER, EASIER,** for you

Here if ever is a book to make the pilot as one with his plane!

Some pilots say their skill is based on "feel" . . . some can't explain it in any terms. This book does the "impossible" . . . for the first time puts into words hard-to-explain facts of flying.

It will give you a sense of HOW THE AIRPLANE REALLY FLIES. It will do more than hours and hours of tedious practice to eliminate fear and tenseness . . . to help you understand the plane's responses to your control . . . to give you *quickly* the safer, easier methods of flying that expert pilots use.

JUST PUBLISHED



Stick and Rudder

By WOLFGANG LANGEWIESCHE

Here is the book for which you have been waiting, showing just exactly what it is the pilot does when he flies, how he does it, and why. It *puts onto paper the first factual analysis* of techniques variously ascribed to "feel," "instinct," "flying sense," etc.

- It gives you an understanding of the all-important ANGLE OF ATTACK—makes you at home in the air because you know why your plane is there, in terms of physical laws rather than of mathematical formulas;
- It shows the true functions of the airplane's controls and how to fly by these functions rather than the names of the controls;
- It gives you all the clues—of sight, sound, and feeling—that are the actual basis of a "sixth sense" in flying;
- It analyzes the four fundamental maneuvers of flight in great detail, and shows you how to perform them correctly;
- It goes thoroughly into the causes of air accidents to give you the few all-important precautions for avoiding them.

With a section on *Dangers of the Air*
by LEIGHTON COLLINS
389 pages, 6 x 9, 87 illustrations $3.75

The Author—
former test pilot for Cessna Aircraft Company and flying instructor, holder of landplane, seaplane, and glider licenses, has been flying and writing about it for 11 years. His monthly articles in Air-Facts have been closely followed by pilots for several years.

"You'll find in it things which for years the engineers have known but have expressed only in mathematical terms and charts and curves. But the pilot needed a lot of that information too—in terms of the stick and the rudder. And only now does he have it."

A close reading of this book is worth as much to any pilot as many hours of flying experience.

In all, it clarifies many ideas and presents a simplified, practical approach that will enable you to build flying skill consciously . . . without waiting to develop "knack" or other intangible qualities. Everything is presented clearly with the full analysis, explanations, and examples to enable you to put these natural flying methods into practice readily.

See It 10 Days—Send This Coupon

McGRAW-HILL ON-APPROVAL COUPON

McGRAW-HILL BOOK CO., Inc., 330 W. 42nd St., New York 18, N. Y.
Send me Langewiesche's Stick and Rudder for 10 days' examination on approval. In 10 days I will send $3.75, plus few cents postage, or return book postpaid. (We pay postage on orders accompanied by remittance.)

Name .....
Address .....
City and State .....
Position .....
Company .....AV. 5-44

(Books sent on approval in U. S. and Canada only.)

Accuracy IN THE HIGHEST DEGREE!

Precision Machining!

The superb performance of American wartime aircraft is accounted for in no small measure by the exacting standards which are now being met in the machining of a multitude of delicate engine parts. The experience and equipment which enables us to do this precision work for leading manufacturers of aircraft engines will be available to you after the present emergency is over—to handle the machining and experimental work on your post-war products.

Write Us Concerning Your Requirements!

THE GOVRO-NELSON COMPANY

1931 Antoinette Detroit, Mich.

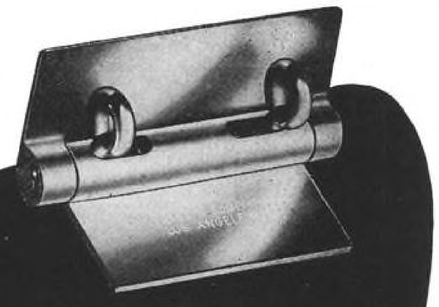

BURKLYN INSTANT RELEASE HINGES

No End to the Applications on New Product Designs, such as: removable hoods and housings — doors and partitions — hatch covers and bulkheads — radio transmitters — removable panels on powered equipment, and dozens of other applications.

Write for specifications or other data to

BURKLYN *Company*

3429 Glendale Blvd., Los Angeles 26, Calif.

PALMGREN

Propeller Servicing EQUIPMENT

FLOOR TYPE BALANCING STAND

BALANCING UNIT

HYDRAULIC STRAIGHTENING PRESS

CHECKING TABLE

We are prepared to furnish complete equipment for servicing all types and sizes of propellers. This equipment consists of various sizes and styles of tables for testing, checking and sanding of propellers. Also floor and pit type balancing stands, hydraulic straightening presses, grinding and polishing machines, plain and splined sleeves, balancing arbors and mandrels, protractors and other miscellaneous tools required for servicing and repairing propellers.

PIT TYPE BALANCING STAND

TEST TABLE

HYDROMATIC TEST TABLE

TESTING POSTS

PROTRACTOR

15 YEARS EXPERIENCE

Having manufactured Propeller Servicing Equipment for over 15 years, we are now supplying Propeller Mfrs. and the U. S. Navy. We will gladly quote on a complete servicing unit or any individual servicing tools.

Write on firm stationery for Descriptive Circular I-5

CHICAGO TOOL AND ENGINEERING CO.
Manufacturers of PALMGREN PRODUCTS for Over 25 Years
8350 SOUTH CHICAGO AVE. CHICAGO 17, ILLINOIS

For **PRECISION-BUILT** *Small Pumps Specify* **TUTHILL**

Dependable Pumps For
COOLANT
LUBRICATION
HYDRAULIC
LIQUID TRANSFER
FUEL DELIVERY

Tuthill Pumps are Serving Army • Navy Air Force Merchant Marine

Tuthill pumps are known everywhere for their dependability, economy and long life as proved by hundreds of thousands in service today. These precision-built internal-gear rotary pumps are available in capacities from 1 to 200 g.p.m. and pressures up to 400 p.s.i. Write for catalog.

TUTHILL PUMP COMPANY
939 E. 95th ST. • CHICAGO 19, ILLINOIS

New 16-Page Catalog
on
AIRCRAFT RELAYS
and **ACCESSORIES...**

★ This 16-page catalog gives operating characteristics, dimensional drawings, wiring diagrams, and general construction information on aircraft relays, contactors, solenoids and aircraft accessories. Among the relays described are five variations of the versatile B-2A Relay built to A.A.F. specifications.

In addition, there are several general purpose aircraft-radio relays; a tiny midget relay weighing less than an ounce; heavyweight and the new lightweight solenoid contactors (A.A.F. types A-3, B-4, B-5A, B-6A, B-7A); eight solenoids; six types of gun switch handles; a control wheel; propeller protractor; and a bomb and flare release.

A request on your company letterhead will bring this catalog to you.

Write Today

GUARDIAN ELECTRIC

1614-F WALNUT STREET CHICAGO 12, ILLINOIS

A COMPLETE LINE OF RELAYS SERVING AMERICAN WAR INDUSTRY

★ ★ ★ ★ ★ ★ ★ ★ ★

FITZGERALD GASKETS

FOR AIRCRAFT ENGINES

GASKET CRAFTSMEN FOR 38 YEARS

Write for information

THE FITZGERALD MANUFACTURING COMPANY
TORRINGTON, CONN.

BRANCHES CHICAGO AND LOS ANGELES
CANADIAN FITZGERALD, LTD., TORONTO

FITZGERALD GASKETS
THE COMPLETE LINE THAT COMPLETELY SATISFIES.

★ ★ ★ ★ ★ ★

Over 40 Years
PREFERRED AS A SOURCE OF STAMPINGS
1903 - 1944

Literature on Request

WHITEHEAD STAMPING CO.
EST. 1903 — 1665 W. Lafayette Blvd., Detroit 16, Mich.

WILLIAMS
SUPERIOR DROP-FORGED TOOLS
DROP-FORGINGS

ANY SHAPE—ANY MATERIAL
COMPLETE FACILITIES

Write today for helpful Forgings Data Folder
J. H. WILLIAMS & CO. "The Drop-Forging People" Buffalo, N.Y.



Will Pull GROB *up* PRODUCTION
"THE TOOLMAKERS BEST FRIEND"

Production on the operation illustrated jumped 1000% from three pieces in ten minutes to three pieces in one minute by eliminating a milling operation and using a Grob Filing Machine and the nimble fingers of the young lady. We are anxious to help you solve similar problems. Please write and let us serve you.

GROB BROTHERS
GRAFTON • WISCONSIN

DYKEM STEEL BLUE
STOPS LOSSES
making dies & templates



simply brush on right at the bench; ready for the layout in a few minutes. The dark blue background makes the scribed layout lines show up in sharp relief, and at the same time prevents metal glare. Increases efficiency and accuracy.

Write for full information

THE DYKEM COMPANY, 2303-A North 11th St., St. Louis 6, Mo.
In Canada: 444 Pacific Ave., Toronto, Ont.

MAILING LISTS THAT WORK...

McGraw-Hill Industrial Mailing Lists are a direct route to today's purchase-controlling executives and technicians in practically every major industry.

These names are of particular value now when most manufacturers are experiencing constantly increasing difficulty in maintaining their own lists.

Probably no other organization is as well equipped as McGraw-Hill to solve the complicated problem of list maintenance during this period of unparalleled changes in industrial personnel. These lists are compiled from exclusive sources, based on hundreds of thousands of mail questionnaires and the reports of a nation-wide field staff, and are maintained on a twenty-four hour basis.

Investigate their tremendous possibilities in relation to your own product or service. Your specifications are our guide in recommending the particular McGraw-Hill lists that best cover your market. When planning your industrial advertising and sales promotional activities, ask for more facts or, better still, write today. No obligation, of course.

McGraw-Hill Publishing Co., Inc.
DIRECT MAIL DIVISION
330 West 42nd Street — New York, 18, N. Y.

WEIDENHOFF
GENERATOR TEST BENCH
for Testing Generators, Starting Motors and Voltage Regulators

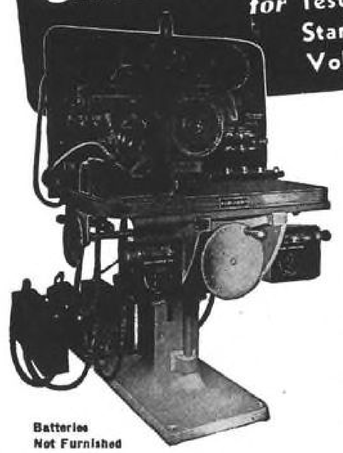

Batteries Not Furnished

The model illustrated is a powerful super bench for testing heavy duty generators, with high speed for light duty generators. Two-speed gear transmission furnishes maximum power at speeds needed to meet varying demands in testing.

A great time saver. Push button type switches in conjunction with pilot lights instantly select and indicate meter scales. Only 3 connections necessary with externally controlled generators. All other connections are incorporated within the bench. Generators tested both directly coupled to output shaft of transmission or by belt drive.

Conserves available man-power and helps to keep electrical units in the best possible condition. You, too, will benefit by sending for the full facts on this Test Bench and what it will do for your service.

KEEP BUYING WAR BONDS AND STAMPS

Joseph Weidenhoff, Inc. Chicago 24, Illinois

TEST BENCHES ENGINE ANALYZERS BATTERY CHARGERS MAGNETO TESTERS ELECTRICAL TESTING & SERVICE EQUIPMENT

DILLON DYNAMOMETER
COMPACT—ACCURATE—LIGHT WEIGHT

A reliable tensiometer widely used by airplane manufacturers, industrial laboratories, electrical power concerns, etc. 8 different capacities from 0-500 lbs. up to 0-15,000 lbs. Fits into virtually any mechanical setup. Only 8¼" x 6¼" x 3"—weighs 8 lbs. 4 oz. Tests for static thrust, load limit, tensile strength, etc. An unbelievably useful instrument at a reasonable price.

WRITE DEPT. R.S. FOR LITERATURE

W. C. DILLON & CO., INC. 5410 W. HARRISON STREET CHICAGO, ILLINOIS

Analytic Geometry

for accurately solving airplane DESIGN, LOFTING, TOOLING and ENGINEERING problems

Here are the same methods taught and proved invaluable for the training of loftsmen, engineers, and tool designers at the Santa Monica plant of Douglas Aircraft Co.—and more recently in the ESMWT Tooling Training Program at the University of California at Los Angeles. Shows plainly the practical application of plane and solid analytic geometry as a precise method in solving your problems. Gives complete explanations; hundreds of illustrative examples. Includes a treatment of conic sections as used in design and lofting.

Just Published

Aircraft Analytic Geometry

By J. J. APALATEGUI
Tooling Project Supervisor, Lofting Departments, Douglas Aircraft Co., Inc.
and L. J. ADAMS
Head, Department of Mathematics, Santa Monica Junior College

285 pages, 5½ x 8½, 150 illustrations, 3 tables, $3.00

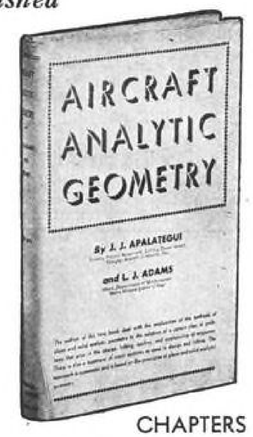

Will show you how to

- write equations of lines.
- treat fundamental problems of lofting, such as the development of single- and double-canted ribs and the location of tooling points and jigging angles, by analytic methods.
- perform the fundamental operations of descriptive geometry analytically.
- calculate the direction ratios of a line and the direction cosines of a line.
- find the true length of a line.
- determine by solid analytic geometry the true angle between a line and a plane, the true angle between two planes, the shortest distance between two lines, etc.

CHAPTERS

1. Trigonometry
2. Plane Analytic Geometry
3. Cartesian Coordinates
4. True Lengths and True Angles.
5. True Lengths and True Angles (Continued)
6. Equations of Planes
7. Equations of Lines
8. Translation and Rotation of Axes
9. Applications
10. Conic Sections. Graphical Treatment
11. Conics. Analytical Theory. Appendix

McGRAW-HILL ON-APPROVAL COUPON

McGRAW-HILL BOOK CO., Inc., 330 W. 42nd St., New York 18, N. Y.

Send me Apalategui and Adams' AIRCRAFT ANALYTIC GEOMETRY for 10 days' examination on approval. In 10 days I will send $3.00, plus few cents postage, or return book postpaid. (Postage paid on cash orders.)

Name .....
Address .....
City and State .....
Position .....
Company ..... Av. 5-44
(Books sent on approval in U. S. and Canada only.)

WHERE TO BUY

NEW EQUIPMENT—ACCESSORIES—MATERIALS—SUPPLIES

Now . . .
A Heavy-Duty Bench-type Engraving and Marking Machine . . . The PANTO Model UE-3

HEAVIER CUTTING SPINDLE
FOUR SPINDLE SPEEDS
MORE PANTOGRAPH REDUCTIONS
FORMING GUIDE ATTACHMENT

Plus the exclusive Panto feature . . . Interchangeable heads for engraving, electrical marking, and acid etching.

» *Write for new Catalog*

H. P. PREIS ENGRAVING MACHINE CO.
159C SUMMIT ST., NEWARK 4, NEW JERSEY

ALLEN

Specializes in Soders, Fluxes, Welding, Brazing Compounds
SILVER SODERS & FLUXES

L. B. ALLEN CO., INC.
6753 Bryn Mawr Ave. Chicago 31, Illinois

STANDARD AIRCRAFT FINISHES
Since 1913
TITANINE
TITANINE INC. UNION, N. J.

Find what you are looking for ?

If this or other advertising in this issue does not supply the information wanted, of products or service, write

AVIATION 330 W. 42 St., N. Y.,18, N.Y.

Have You Noticed These Items In Recent Issues?

When you are in need of some product, equipment or service to speed and improve operation, or save money . . . you may find it here—in the Where To Buy Section. It pays to check this page . . . EACH ISSUE.

Aircraft Designing and Development
Aircraft Finishes
Brass Fittings
Cable Splicers
Custom Aircraft Fabrication
Engraving, Acid Etching, Electric Marking
Fluxes
Light Weight Skis
Mechanical Riggers
Soders
Wire Strippers

What Makes A Mailing *CLICK?*

Direct Mail Division

Advertising men agree—the list is more than half the story.

McGraw-Hill Mailing Lists, used by leading manufacturers and industrial service organizations, direct your advertising and sales promotional efforts to key purchasing power. They offer thorough horizontal and vertical coverage of major markets, including new personnel and plants. Selections may be made to fit your own special requirements.

New names are added to every McGraw-Hill list daily. List revisions are made on a twenty-four hour basis. And all names are guaranteed accurate within two per cent.

In view of present day difficulties in maintaining your own mailing lists, this efficient personalized service is particularly important in securing the comprehensive market coverage you need and want. Ask for more detailed information today. You'll probably be surprised at the low over-all cost and the tested effectiveness of these hand- picked selections.

McGraw-Hill Publishing Co., Inc.
330 West 42nd Street *New York, 18, N. Y.*

Geared for **WAR** *today —or* **PEACE** *tomorrow*

Through two wars and for almost half a century, The Alexander Milburn Company has been serving Government and Industry. Milburn Equipment may be relied upon for superior, dependable service under stress of the most adverse conditions. Write for Catalog.

The ALEXANDER MILBURN *Company*

1414 W. BALTIMORE ST., BALTIMORE, MD.

MULTI-POLE
SMALL *and* POWERFUL

The Sensitive G-M Type 27 relay answers many problems requiring small, multi-pole relays in electronic circuits. Its small size, rugged construction, extreme efficiency and high contact capacity make it ideal for uses on aircraft and mobile equipment where vibration is encountered. Designed for permanence of adjustment. Temperature; humidity; elevation; salt spray test; to usual aircraft specifications. Two actual examples of type 27 characteristics are:

1. Type 27, specification 12700, single pole single throw relay—contact pressure 50 grams minimum; acceleration 10g.; coil power 90 milliwatts at 25° C. ambient; contact gap .010 inch; weight 5¼ ounces.
2. Type 27, specification 12746, three pole relay with two double throw contacts and one single pole normally open contact—contact pressure, 30 grams minimum; acceleration, 10g.; pick-up 3.75 milliamperes maximum with 10,550 ohm coil (148 milliwatts); contact gap .010 inch; weight 5½ ounces.

Comparable relays with a variety of contact forms and coil resistances can be supplied. We invite your inquiries.

G-M LABORATORIES INC. *Buy* WAR BONDS & STAMPS
4310 NORTH KNOX AVE., CHICAGO 41, ILL.

WHY IT PAYS TO HAVE US STUDY YOUR FELT APPLICATIONS

Aware of the rapid advances in the industrial uses of Felt, many manufacturers ask our advice on existing and proposed applications. As the most important Felt manufacturer, we are a prime source of authoritative information on all types of Felt — and on new techniques for their efficient and economical use.

We are always ready to make a thorough study of any Felt application — and to suggest possible innovations or improvements.

Often in studying seemingly satisfactory applications, we are able to recommend one or more Felts, similar in character, but with *ADDED ADVANTAGES* for the work to be done, and in many cases it is possible to reduce your costs.

As the first step, please tell us the nature of your Felt application or problem — and when you would like our representative to call. The obligation is always ours!

American Felt Company
TRADE MARK

General Offices: GLENVILLE, CONN.

New York; Boston; Chicago; Detroit; Philadelphia; Cleveland; St. Louis Los Angeles; Seattle; San Francisco; Dallas

PRODUCERS OF FINEST QUALITY PARTS FOR OIL RETAINERS, WICKS, GREASE RETAINERS, DUST EXCLUDERS, GASKETS, PACKING, VIBRATION ISOLATION, INSULATION AND SOUND ABSORPTION FELTS

AVIATION'S MARKET PLACE

CLASSIFIED ADVERTISING

USED PLANES, ENGINES AND PARTS FOR SALE, TRADE OR WANTED SPECIAL SERVICES OF DISTRIBUTORS, FIXED BASE OPERATORS, ETC.
(Sales and Service—Storage—Repairing—Charter—Aerial Towing or Exhibitions—Special Instruction)
EMPLOYMENT — SELLING — BUSINESS OPPORTUNITIES: OFFERED OR WANTED

RATES: UNDISPLAYED, 10 cents a word, minimum $2.00 (Position Wanted: ½ the undisplayed rate; box number counts as 10 words.) DISPLAYED $7.25 per inch. Contract rates on request.

Address AVIATION "Classified", 330 W. 42nd St., New York, N. Y.
Phone: MEdallion 3-0700—Ext. 556.

NEW ADVERTISEMENTS received by May 16th will appear in the June issue within space limitations

ENGINEERS—DRAFTSMEN—LOFTSMEN

Large Aircraft Company on Long Island near New York City has immediate need for engineers, draftsmen and loftsmen. Good salaries and living conditions.

Draftsmen

Only those with some aircraft experience need apply.

Structural Engineers

With or without aircraft experience, to be employed as Stress Analysts. College or A. S. T. P. instructors in mathematics or physics are especially qualified.

Loftsmen

With or without aircraft experience for lines and detail layout on metal.

War Manpower Commission regulations apply.

Individuals and Employment Agencies are invited to reply.

P-846, Aviation
330 West 42nd St., New York 18, N. Y.

HELP WANTED

Splendid Opportunity
in the Supercharger Field for:

AVIATION ENGINEERS
PROJECT ENGINEERS
MATHEMATICIANS
GEOMETRISTS
DRAFTSMEN
DESIGNERS
CHECKERS
TEST ENGINEERS
ENGINEERING AIDS
PRODUCTION CONTROL MEN

Statement of Availability Required

Write or Wire qualifications to
Personnel Director

TURBO ENGINEERING CORP.
Phone: Trenton 3-7134
Hancock & Lalor St., Trenton 7, N. J.

HELP WANTED

Airport Traffic Controller

for

RENTSCHLER FIELD

Must hold C. A. A. certificate and have sufficient experience to qualify as chief controller. Excellent opportunity.

To arrange for an interview, please write or wire your qualifications to Airport Department, or phone 8-4811, extension 352.

PRATT & WHITNEY AIRCRAFT
East Hartford, Connecticut

All hiring shall be done in conformance with the War Manpower Stabilization Act

Additional Positions Vacant Advertising on Opposite Page

POSITION WANTED

AERONAUTICAL ENGINEER with broad practical background, licensed pilot, mechanic, ground instructor, radio operator, University of Illinois graduate, desires permanent position with progressive aircraft company. Previous experience includes design and development of 4 place airplane, rebuilding of planes, work with hydraulic systems, retractible landing gears, constant speed propellers, engines, etc. Experienced in administration, supervision and instruction. Can furnish excellent references, married, family, 4-F draft status with certificate of availability. PW-847, Aviation, 520 N. Michigan Ave., Chicago 11, Ill.

REBUILDING

AIRCRAFT BATTERIES rebuilt. New Plates and separators. Your case cover and costs. Let us quote. Bowers Battery Mfg. Co., Inc., Reading, Pa.

SPECIAL SERVICE

Airplanes for Charter, 4 passengers, reasonable rates. Will also accept freighting jobs anywhere. E. B. Joiner, Box 497, Prescott, Ariz.

SELLING OPPORTUNITIES
OFFERED—WANTED
Selling Agencies—Sales Executives
Salesmen—Additional Lines

OPPORTUNITY WANTED

MANUFACTURER'S REPRESENTATIVE, seeking exclusive representation for AN Standard Aircraft parts, Electrical, fittings, Pipe, Plumbing, Swage Terminals, Tubing, Turnbuckles etc, Interested in non-competing lines. Have Electrical Engineering and Sales background in Domestic and Foreign field. Well versed in Washington Merry-Go-Round. Established here ten years. Call on Federal Government Agencies, Foreign Agencies and Manufacturer's of Aircraft throughout Eastern States. Please write—Geo. T. Tavenner, 1427 Eye St. N. W., Washington 5, D. C.

FOR SALE

NEW TIRES: 8.00x4, 6.00x6, 7.00x4, two-ply $9.75, four $11.75. Tubes $3.25. We wholesale and carry large stocks. Propellers, Spark Plugs, Batteries, Tailwheel Assemblies, Windshield Pyralin. Bob Trader Aero Supply, Municipal Airport, Pittsburgh, Pa.

Don't forget
the
Box Number

. . . when answering the classified advertisements in this magazine. It's our only means of identifying the advertisement you are answering.

AVIATION'S MARKET PLACE

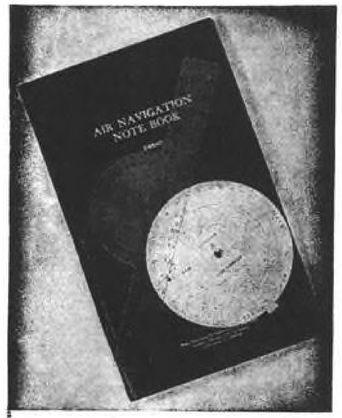

New Dead Reckoning Equipment

For Defense of Land, Sea and Air

AIR NAVIGATION TEXT with Dept. of Commerce Navigation Plotter. Necessary for Cross-country flights and for Commercial and Instrument rating examination. Difficult radius of action. Off course and alternate airport problems plotted and solutions given in a simple understandable methods similar to the text used in the U. S. Naval Academy but improved. Book size 14x8½ in handsome red leatherette with gold letters. Plotter contained in patent cover pocket. Combination only $4.00 postpaid or C.O.D. U. S. Coast & Geodetic Computer shown in cut, with instructions $3.00 extra.

Outstanding New Aviation Defense Books

RADIO and INSTRUMENT FLYING: By Charles A. Zweng, Instructor, U. S. Air Corps, New 4th Edition covering new important material. Written especially to prepare the pilot for government examination for "instrument rating." Radio-Telephone Permit included with Meteorology, Radio-Orientation, let-down, off-course and alternate airport problems. Only $4.00 postpaid.

Celestial Aid Navigation Training

Prepare now for this important phase of Air Defense. Our students are now air navigators and instructors in various quarters of the world.

Write for Information

FLIGHT INSTRUCTOR: New De Luxe edition covering the written examination for flight instructor rating. New authentic Multiple Choice questions with answers included, $4.00 postpaid or C.O.D.

CELESTIAL NAVIGATION—complete equipment consisting of Air Navigation Note Book and Navigation Plotter, Simplified Celestial Navigation, Air Almanac Line of Position Book, and Illyness Star Chart; all 6 items ony $11.75 postpaid or C.O.D.

AERONAUTICAL TRAINING. Just off the press. New enlarged edition. For the first time shows separate sections containing Typical Private Pilot and Commercial Pilot "Multiple Choice Examinations." $3.00 postpaid or C.O.D.

GROUND INSTRUCTOR. Written for the student preparing for "Ground Instructor Rating." Excellent for class work. Covers Navigation, Meteorology, Aircraft and Theory of Flight, Engines and Civil Air Regulation, $3.00 postpaid or C.O.D.

GROUND INSTRUCTOR RATING. Just published. Contains Typical "Multiple Choice" examinations on Navigation, Meteorology, Aircraft and Theory of Flight, Engines and CAR. Nomenclature and aviation dictionary in back of book. It's new and different. Something you cannot afford to be without. $3.00 postpaid. Or it may be purchased in combination with "Ground Instructor" for $5.00.

AIRPLANE and ENGINE MECHANICS: Examinations. New authentic Quiz Book now covers the new Typical Multiple Choice examinations fully illustrated with necessary diagrams. Used by Lockheed, Douglas, Northrup, Ryan and outstanding schools. Why fail? Only $3.00 for both examinations and CAR.

AIR NAVIGATION (Gold Medal Edition) includes meteorology. Just published $3.50.

LEARNING TO NAVIGATE (new) by Weems & Eberle $2.00.

PARALLEL RULES (15 inch) for precision work $2.50

NAVIGATOR'S DIVIDERS Navy Type.....$1.50

HORSTMAN "Line of Position" Navigation Plotter $2.00

PHYSICS U. S. Naval Academy Ed.....$5.50

DALTON MARK VII COMPUTER with instructions, $7.50.

AIR NAVIGATOR'S LOG BOOK $2.00

Pilot's Log Book with fabric cover, gold letters $1.00

New Army Type E-6B Navigation Computer (white face with black letters) not shown in cut..$10.00

AIRLINE TRANSPORT PILOT RATING. By Zweng. A new and timely book for men preparing for the Airline government examination $4.00

PAN-AMERICAN NAVIGATION SERVICE

12021 VENTURA BOULEVARD NORTH HOLLYWOOD, CALIFORNIA

PROFESSIONAL SERVICES

LANCASTER, ALLWINE & ROMMEL
Registered Patent Attorneys
Booklet — "General Information Concerning Inventions & Patents" and "Fee Schedule" sent without obligation.
Patents—Copyrights—Trade-Marks
Suite 452, 815—15th St., N. W., Washington, D. C.

When you need quick action on Opportunities available or wanted in Aviation . . . USE

AVIATION'S "MARKET PLACE"

HELP WANTED

Hamilton Standard Propellers offers an opportunity in propeller field work to persons trained in aircraft or propeller installations. Openings for men with aeronautical experience as:

SERVICE ENGINEERS

In addition there are positions available to persons experienced in the following classifications:

TOOL AND GAGE DESIGNERS
MECHANICAL DRAFTSMEN
METHODS ENGINEERS

To arrange for an interview, please write United States Employment Service, 414 Capitol Avenue, Hartford, Connecticut, or Employment Supervisor at

HAMILTON STANDARD PROPELLERS
East Hartford, Connecticut

All hiring shall be done in conformance with the War Manpower Stabilization Act.

WANTED

PRODUCT DESIGNERS AND DETAILERS

Work on small electro-mechanical devices. Excellent post-war prospects. Must comply with W.M.C.

Address reply to:

LEAR AVIA, INC.
Piqua, Ohio Att: R. J. Biggs

AERO TRADES COMPANY

Roosevelt Field, L. I.

EXPERIMENTAL WORK MODIFICATIONS

Specialists in Manufacturers of Wood & Metal Airplane Parts

Government Approved Station 115

AVIATION SCHOOLS

AERONAUTICAL ENGINEERING

DEGREE IN 27 MONTHS

Qualify in Aeronautical Engineering at Indiana Tech. B. S. degree in 27 months. Competent instruction. Thorough, intense, practical program. New, modern Wind Tunnel. Prep courses without extra charge. Government approved Ground School Courses. Aeronautical industry rapidly expanding. Companies need engineers. Attractive appointments for Graduates. Enter June, Sept., Dec. and March. Tuition and living costs low. Self-help opportunities. Also B.S. degree courses in 27 months in Chemical, Civil, Electrical, Mechanical and Radio Engineering. Catalog and list of successful graduates on request.

INDIANA TECHNICAL COLLEGE
105E East Washington Blvd., Fort Wayne 2, Ind.

AVIATION'S MARKET PLACE

SEE US FOR

INSTRUMENTS

NEW — USED — ALL TYPES — SALES — REPAIR — INSTALLATION — COMPLETE STOCK

STANDARD AIRCRAFT EQUIPMENT COMPANY

Approved Repair Station 188

Hangar "D," Roosevelt Field, Mineola, L. I., N. Y. Garden City 8753

INVENTORS!

We seek specialized equipment, preferably patented, in Aircraft, Automotive, and Building Trade Fields; also established U.S. products for development and production by the associated companies of the Simmonds Group throughout the world.

SIMMONDS AEROCESSORIES, INC.

30 Rockefeller Plaza, New York 20, N.Y.

FOR SALE

WASP "C" and "S5D1G" ENGINE PARTS

CONSTANT SPEED PROPELLERS

Models 1XA and 4 B 2

RECONDITIONED SPARK PLUGS

MANY OTHER ITEMS

Write to Division Purchasing Agent

PAN AMERICAN AIRWAYS SYSTEM

Miami 31, Florida

ANODIZING OF ALUMINUM HARD CHROMIUM PLATING

Philadelphia Rust-Proof Co.

3217 Frankford Ave. Phila., Pa.

IN ONE EAR BUT...

...not out of the other. For orders received by telephone at Snyder's are accorded the same prompt and expert attention as those received over the counter. A keen sense of trusteeship is a factor in such absentee transactions.

SNYDER AIRCRAFT CORPORATION

MUNICIPAL AIRPORT Chicago 28, Illinois — SULLIVANT AVE. AIRPORT Columbus 4, Ohio

Hydro-Mechanical Steering Gear

FOR SALE

For automobiles, auto buses, trucks, and heavy duty military vehicles. Excellent war and post war product.

FS-845, Aviation
520 North Michigan Ave., Chicago 11, Ill.

Watch—

Aviation's Market Place for "OPPORTUNITY" Advertising

Changed your ADDRESS?

Let us know so that we can keep copies of Aviation coming promptly.

TO: Circulation Dept., Aviation
330 West 42nd Street, New York, N. Y.

Name .....

Old Address .....

New Address .....

Company .....

If there is anything you want—

or something you don't want that other readers of this paper can supply —or use—advertise it in

AVIATION'S MARKET PLACE

AVIATION "CLASSIFIED"

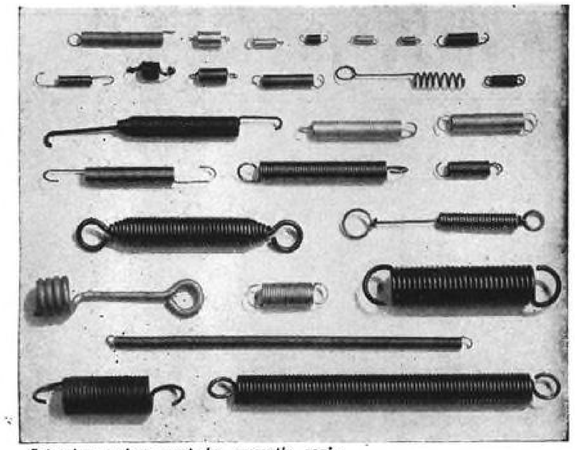

Extension springs must be correctly engineered and so controlled in manufacture that, with a given load factor, the percentage of elongation remains constant.

WHAT IS A GOOD SPRING?

Reliable AIRCRAFT QUALITY

A good spring starts with proper design, which is basic, and with metal possessing the essential characteristics for the purpose. Further, a good spring requires exactitude in coiling and shaping, correctness in dimensions and end finishing, skillful control of heat-treating and tempering.

These are *some* of the factors which produce, in springs, maximum accuracy and uniformity of action, long life, resistance to fatigue and corrosion, dependability under temperature variations. Here at Reliable we have developed orignal production equipment, and also craftsmen who are expert in every detail of fine spring making, from engineering to final inspection and testing. This unusual spring service *costs you no more.*

YOUR product deserves the best spring you can buy. Avail yourself of Reliable's specialized experience. Catalog and quotations on request.

THE RELIABLE SPRING & WIRE FORMS CO.

3167 Fulton Road Cleveland 9, Ohio

Representatives in Principal Cities

YOU CAN RELY ON **Reliable Springs**

ROUND AND FLAT WIRE SPRINGS — CLIPS HOOKS BENDS LIGHT STAMPINGS

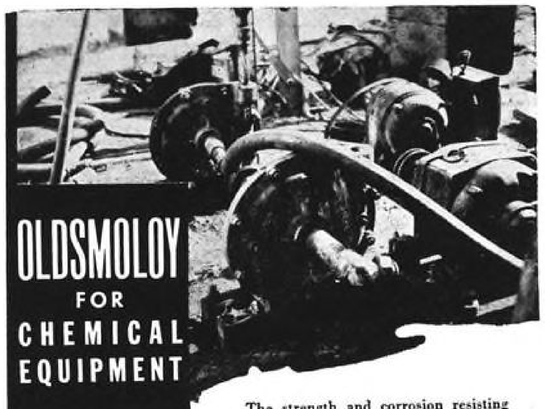

OLDSMOLOY FOR CHEMICAL EQUIPMENT

PHYSICAL CHARACTERISTICS

Tensile Strength—psi 70,000 to 76,000

Elongation in 2"—% 15 to 20%

Reduction in area—% 21.70

Proportional Elastic Limit, with Berry Strain Gauge—psi 25,150

The strength and corrosion resisting qualities of Oldsmoloy—chrome-nickel-molybdenum bronze—permit its use as machine fittings and centrifugal pump parts for the handling of saline solutions, dilute sulphuric acid and other chemical solutions.

Oldsmoloy is non-magnetic, non-carbonizing. It welds readily and machines easily.

Write for Bulletin giving specifications and applications.

OLDS ALLOYS *Company* D-2

8686 Rheem Ave., Southgate, Calif.
Suburb of Los Angeles

MAILING LISTS THAT WORK...

McGraw-Hill Industrial Mailing Lists are a direct route to today's purchase-controlling executives and technicians in practically every major industry.

These names are of particular value now when most manufacturers are experiencing constantly increasing difficulty in maintaining their own lists.

Probably no other organization is as well equipped as McGraw-Hill to solve the complicated problem of list maintenance during this period of unparalleled changes in industrial personnel. These lists are compiled from exclusive sources, based on hundreds of thousands of mail questionnaires and the reports of a nation-wide field staff, and are maintained on a twenty-four hour basis.

Investigate their tremendous possibilities in relation to your own product or service. Your specifications are our guide in recommending the particular McGraw-Hill lists that best cover your market. When planning your industrial advertising and sales promotional activities, ask for more facts or, better still, write today. No obligation, of course.

McGraw-Hill Publishing Co., Inc.

DIRECT MAIL DIVISION

330 West 42nd Street New York, 18, N. Y.

ADVERTISERS IN THIS ISSUE

Actus Products Co. 336
Adel Precision Products Corp. 93
Aero Products ..... Insert 265
Aeroquip Corp 202
Air Associates, Inc. 258
Aircraft Fitting Co., The 46
Aircraft Nut Corp. 275
Aircraft Standard Parts Co. 270
Airesearch Mfg. Co. 305
Air-Maze Corp. 374
Albertson & Co., Inc. 47
Air Reduction 399
Alemite 362
Allegheny Ludlum Steel Corp. 66
Allen Co., Inc., L. B. 430
Allen Mfg. Co., The 253
Allied Products Corp. 310
Allis Co., The Louis ..... Insert 69-70
Allison Engineering 375
Aluminum Co. of America 347
American Bosch Corp. 76
American Brake Shoe Co. 54
American Broach & Machine Co. 262
American Chain and Cable Co., Inc. 196
American Chemical Paint Co. 411
American Flange & Mfg. Co., Inc. 44
American Felt Co. 431
American Ph olic Corp. 250-251
American Machine & Metals, Inc. 249
American Magnesium Corp. 339
American Metal Products Co. 12
American Screw Co. 314, 438
American Steel and Wire Co. 98-369
Ampco Metals, Inc. 281
Angier Corp. 67
Apex Machine & Tool Co., The ..... Insert 266
Arnolt Motor Co. 386
Arter Grinding Machine Co. 410
Atkins & Co., E. C. 280
Atlantic Screw Works 438
Automatic Electric Sales Corp. 86
Automatic Products Co. 311
Automatic Transportation Co. 392
Automotive & Aircraft Div. of American Chain & Cable Co., Inc. 196
Aviation Market Place 432-433-434
Aviation Engineering, Inc. 385
Aviquipo 416

B. H. Aircraft Co. 416
Baldor Electric Co. 416
Baldwin Locomotive Works, The 282
Barber-Colman Co. 409
Bardwell & McAllister, Inc. 236
Behr-Manning 245
Bell Aircraft Corp. ..... Insert 248
Bellanca Aircraf Corp. 340
Bendix Aviation, Pacific Division 4
Bendix Aviation Corp. 4-106
Back Cover
Bendix-Stromberg 106
Berry Brothers 97
BG Corp., The 325
Birtcher Corp., The 419
Blackhawk Mfg. Co. 75
Bland Precision Products Co. 283
Bliss Co., E. W. 45
Bolton Mfg. Co., The 284
Bonney Forge and Tool Works 31
Booth Felt Company, The 406
Boots Aircraft Nut Corp. 14
Borg-Warner Corp. 243
Bower Roller Bearing Co. ..... Insert 36
Breeze Corp., Inc. 25
Briggs & Stratton Corp. 242
Bristol Co., The 349-438
Bryant Chucking Grinder Co. 51
Bunting Brass and Bronz Co., The 214
Burndy Engineering Co., Inc. 286
Burklyn Company 426
Bush Mfg. Co. 341
Butler Mfg. Co. 42

Callite Tungsten Corp. 425
Cannon Electric Development Co. 255
Carborundum Company, The 370
Cardox Corp. 316
Carpenter Steel Co., The 415
Celanese Celluloid Corp. 65
Central Screw Co. 438
Chambersburg Engineering Co. 91
Champion Spark Plug Co. 378
Chandler-Evans Corp. 308
Chandler Products Corp. 438
Chance-Vought Aircraft, Div. of United Aircraft Corp. ..... Front Cover
Cherry Rivet Co. 306
Chicago Pneumatic Tool Co. 68
Chicago Tool & Engineering Co. 427
Chicago Wheel and Mfg. Co. 381
Clare and Co., C. P. 261
Clark Jr. Electric Co., Jas. 234
Clarostat Mfg. Co., Inc. 231
Cleveland Cap Screw Co., The 382
Cleveland Pneumatic Tool Co., The 222
Climax Molybdenum Co. 226
Columbia Steel Co. 98-395
Cone Automatic Machine Co., Inc. 30
Continental Motors Corp. 61
Continental Screw Corp. 438
Cook Electric Co. 271
Corbin Screw Corp., The 438
Craftint Mfg. Co., The 292
Crescent Co., The 412
Crescent Truck Co. 239
Curtiss Aeroplane Co. ..... Insert 193-247
Curtiss Propeller Co. ..... Insert 193-247
Curtiss Wright Corp. ..... Insert 193-247

Danly Machine Specialties, Inc. 390
Darnell Corp., Ltd. 269
Dearborn Gage Co. 394
De Vilbiss Co., The 327
Dill Mfg. Co., The 354
Dillon and Co., Inc., W. C. 429
Dixon Crucible Co., Joseph 307
Dole Valve Co., The 348
Douglas Aircraft Co., Inc. 288
Dow Chemical Co., The ..... Third Cover
du Pont de Nemours & Co., E. I. 356-357
Dykem Company, The 428

Eberhard Faber Pencil Co. 418
E. A. Laboratories Inc. 238
Eclipse-Pioneer ..... Back Cover
Edo Aircraft Corp. 15
Eitel-McCullough, Inc. 63
Elastic Stop Nut Corp. of America 102
Electric Auto-Lite Co., The 104
Electric Storage Battery Co., The 388
Electrol, Inc. 224
Elwell-Parker Electric Co. 323
Emerson Electric Mfg. Co., The 95
Engineers Specialties 416
Eutetic Welding Alloys Co. 285
Evans Products Co. 376

Fairchild Engine and Airplane Corp. 355
Fedders Mfg. Co., Inc. 404
Federal Bearings Co., Inc., The 78
Federal Telephone & Radio Corp. 220
Ferguson Inc., Harry 80
Filtrine Mfg. Co. 417
Firestone Tire and Rubber Co., The 244
Fitzgerald Mfg. Co., The 428
Fletcher Aviation Corp. 343
Flex-o-Tube Co., The 383
Foote Bros. Gear and Machine Corp. 13
Fulton Sylphon Co., The 48

General Controls 358
General Electric Co. 206-309-367-393
General Screw Mfg. Co. 438
G-M Laboratories, Inc. 431
Goodrich Co., The B. F. ..... Insert 157-160
Goodyear Tire and Rubber Co., Inc., The 8-9-10-11
Govro-Nelson Co., The 426
Grand Rapids Varnish Corp. 240
Graton & Knight Co. 361
Graybar Electric Co., Inc. 293
Greenfield Tap & Die Corp. 274
Grimes Mfg. Co. 346
Grob Brothers 428
Guardian Electric 427
Guiberson Diesel Engine Co. 32
Gulf Oil Corp. 391

H & A Mfg. Co., Inc. 33
Hall Mfg. Co. 294
Hallicrafters Co., The 368
Hansen Mfg. Co. 99
Harper Co., The H. M. 438
Harris-Seybold-Potter Co. 387
Hartwell Aviation Supply Co. 17
Heineman Circuit Breaker Co. 55
Holo-Krome Screw Corp., The 407
Holtzer-Cabot Electric Co., The 272
Homelite Corp. 389
Hotel Lexington 416
Houdaille-Hershey Corp., The 315
Hunter Electro-Copyist, Inc. 421
Hycar Chemical Co. 28

International Nickel Co., Inc., The 24-318
International Screw Co. 438
Interstate Aircraft & Engineering Corp. 39
Irving Air Chute Co., Inc. 18

Jacobs Aircraft Engine Co. 103
Jones and Lamson Machine Co. 41
Justrite Mfg. Co. 414

Ken-Rad Tube and Lamp Co. 302
Kenyon Instrument Co., Inc. 252
Keuffel and Esser Co. 364
Kidde and Co., Walter 105
Kinnear Mfg. Co., The 419
Kold-Hold Mfg. Co. 263
Kollsman Instrument Div. of Square D. Co. 6
Kropp Forge Aviation Co. 57

Laminated Shim Co., Inc. 22
Lamson and Sessions Co., The 400-401-438
Lear Avia, Inc. 84
Leland Electric Co., The 276
Lewis Co., Warner 419
Lincoln Electric Co., The 58-59
Liberty Mirror Works 412
Lincoln Engineering Co. 329
Linde Air Products Co., The 359
Lisle Corporation 425
Linear Packing and Rubber Co. 402
Littelfuse, Inc. 29
Lockheed Aircraft Corp. 52
Logan Engineering Co. 204
Lycoming Mfg. Corp. 299

MacDermid, Inc. 237
Mac Raes Blue Book 406
Mallory and Co., Inc., P. R. 377
Manufacturers Screw Products 438
Martin Co., The Glenn L. 335
McAleer Mfg. Co. 320
McDonald Mfg. Co. A. Y. 424
McGraw-Hill Book Co. 414-420-426-429

ADVERTISERS IN THIS ISSUE

McGraw-Hill Publishing Co., Inc. 435
Mercury Aircraft Inc. 408
Metal Specialty Co., The 372
Meyercord Co., The 342
Micro-Switch Corp. 365
Milburn Co., The Alexander 431
Milford Rivet & Machine Co., The 295-438
Minnesota Mining & Mfg. Co. 278-279
Miniature Precision Bearings 283
Morganite Brush Co., Inc. 358
Muehlhausen Spring Corp. 351

National Machine Products 328
National Powder Extinguisher Corp. 60
National Screw and Mfg. Co., Inc. 38-438
National Tube Co. 395
Nelson Electric Supply Co. 417
New Departure 264
New England Screw Co. 416-438
New York Air Brake Co., The ..... Insert 194
Norgren Co., C. A. 287
Norma-Hoffmann Bearings Co. 300
North Bros. Mfg. Co. 232
Norton Company 92
Northrop Aircraft, Inc. 371

Ohio Aircraft Hardware Co. 415
Ohmite Mfg. Co. 321
Olds Alloys Co. 435
Onan and Sons, D. W. 406
O'Neil-Irwin Mfg. Co. 418

Packard Motor Car Co. 37
Panelyte, Division of St. Regis Paper Bag Co. 298
Parker Appliance Co. 233
Parker-Kalon Corp. 438
Patent Scaffolding Co., Inc., The 283
Pawtucket Screw Co. 438
Peck Spring Co., The 410
Permoflux Corp. 257
Perfect Circle Companies., The 352-353
Pheoll Mfg. Co. 438
Phillips Petroleum Co. 23
Phillips Screw Mfg. 438
Piper Aircraft Corp. 7
Plomb Tool Co. 415
Poulsen-Nardon, Inc. 43
Preis Engraving Machine Co., H. P. 430
Pressed Steel Co., The 259
Presstite Engineering Co. 296
Purolator Products, Inc. 354

Radiator Specialty Co. 289
Ramsey Accessories Mfg. Corp. 83
Reeves Brothers, Inc. 319
Refiners Lubricating Co. 421
Reading Screw Co. 438
Reliable Spring and Wire Forms Co. 435
Remington Rand, Inc. 380
Reliable Electric Co. 350
Republic Aviation Corp. 188
Republic Gage Co. 418
Revere Copper & Brass, Inc. 217
Reynolds Metals Co. 26-27
Roberts Rubber Co., Weldon 420
Rohr Aircraft Corp. 360
Roller Bearing Co. of America 326
Romec Pump Co. 101
Rotol Airscrews Ltd. 403
Ruemelin Mfg. Co. 423
Russell, Burdsall and Ward Bolt and Nut Co. 438
Ryerson and Son, Inc., Joseph T. 246

Schatz Mfg. Co., The 366
Schrader's Son, A. 260
Scott Aviation Corp. 423
Scovill Mfg. Co. 438
Sedgwick Machine Works 291
Sellstrom Mfg. Co. 419
Sensenich Brothers 418
Severance Tool Industries, Inc. 85
Shakeproof, Inc. 436
Sheffield Corp., The 208
Shell Oil Co. 53
Silent Hoist Winch and Crane Co. 418
Sinclair Refining Co., Inc. 324
Simmonds Aerocessories, Inc. 40
SKF Industries, Inc. 334
Sloane, W & T 312
Small Motors 417
Snap-On Tools Corp. 71
Socony-Vacuum Oil Co., Inc. ..... Insert 87-90
Solar Aircraft Co. 303
South Bend Lathe Works 62
Southington Hardware Mfg. Co. 438
Spencer Thermostat Co. 50
Sperry Gyroscope Co., Inc. 304
Spoal Cotton Co., The 330
Square D Co.-Kollsmans Instrument Div. 6
Staley Mfg. Corp. 267
Standard Conveyor Co. 301
Standard Pressed Steel Co. 413
Steel Improvement & Forge Co., The. 405
Stewart-Warner Corp. 72-73-81
Studebaker Corp., The 338
Superior Steel Corp. ..... Insert 35
Superior Tube Co. 16
Sunnen Products Co. 34
Surface Combustion 20-21
Swan Engineering Co., Inc. 417

Tannewitz Works, The 344
Tarbonis Co. 408
Taylor Fibre Co. 82
Thomas & Betts Co., The 200
Thompson Products, Inc. 79
Thurston Inc., Harris W. 398
Time, Inc. 337
Timken Roller Bearing Co., The 126-235
Tinnerman Products, Inc. ..... Second Cover
Titanine, Inc. 430
Titeflex Inc. 77
Tobe Duetschmann Corp. 254
Topflight Tool Co. 412
Torrington Co., The 397
Tube Turns, Inc. ..... Insert 229-230
Tuthill Pump Co. 427

Union Oil Co. 373
Union Carbide & Carbon Corp. 359
United States Elec. Tool Co., The 384
United States Plywood Corp. 268
United States Rubber Co. ..... Insert 211-212B-273
United States Steel Corp., Subsidiaries 98-395
United States Steel Export Co. 98-395

Veeder-Root, Inc. 317
Vickers, Inc. 198
Vinco Corp. 363
Vokes, Ltd. 322

Waldes Koh-I-Noor, Inc. 64
Walker-Turner Co., Inc. 379
Walter Motor Truck Co. 313
War Savings Bonds 422
Waverly Petroleum Products Co. 421
Weatherhead Co., The 56
Weidenhoff Inc., Joseph 429
Weldon Tool Co., The 408
Western Felt Works 49
Westinghouse Electric and Mfg. Co. 19-290-331
Weston Electrical Instrument 396
Where To Buy 430
Whitehead Stamping Co. 428
White-Rodgers Electric Co. 256
Whitaker Battery Supply Co. 96
Williams and Co., J. H. 428
Wilson Welder & Metals Co., Inc. 345
Wittek Mfg. Co. 100
Welf's Head Oil Refining Co., Inc. 74
Worthington Mower Co. 94
Wright Aeronautical Corp. ..... Insert 193-247
Wyman Gordon 297

Young Radiator Co. 277

Zephyr Mfg. Co. 241

★ ★ ★

SCHOOLS

Indiana Technical College 433

AVIATION'S MARKET PLACE

(CLASSIFIED DISPLAY ADVERTISING)

BOOKS 433
BUSINESS OPPORTUNITIES 432
EMPLOYMENT (Positions Wanted and Vacant) 432
FOR SALE 432, 433
PROFESSIONAL SERVICES 433

(CLASSIFIED DISPLAY ADVERTISING)

Aero Trades Co. 433
Hamilton Standard Propellers 433
Lancaster, Allwine & Rommel 433
Lear Avia., Inc. 433
Pan American Airway Systems 434
Pan American Navigation Service 433
Philadelphia Rust Proof Co. 434
Pratt & Whitney Aircraft.. 432
Snyder Aircraft Corp. 434
Standard Aircraft Equipment Co. 434
Symonds Aerocessories, Inc. 434
Turbo Engineering Corp. ... 432

BLONDE? MAYBE--SMART? COULD BE!

MUSCLE? NOT MUCH------BUT,

BROTHER, SHE'LL DO A WHALE OF A JOB

ON YOUR ASSEMBLY LINE

IF YOU USE THE RECESSED

HEAD SCREW THAT MAKES SCREW DRIVING TROUBLE-PROOF

--THAT ENDS THE NEED FOR SKILL AND

BRAWN

------IT'S PHILLIPS

Anyone can drive Phillips Screws!

Time was when it took real "he-men" to drive screws. They had to be strong . . . had to have skilled hands . . . had to be trained. But today the job's a cinch for anyone!

What makes it a cinch is the Phillips Recessed Head Screw – the screw which, time studies prove, steps up screw driving speed as much as 50 per cent.

With Phillips Recessed Head Screws, there's no premium on brawn! They drive easy – because turning power is fully utilized. Nor is there any premium on training or skill. Dangerous driver skids are out, and workers just can't fumble, make wobbly starts, or drive slantwise.

As a result, untrained girls quickly match anything experienced male operators do – driving Phillips Screws.

Think what this means to you in (1) man-and-training hours saved, in (2) increased production, in (3) finer workmanship. Then ask yourself if you're getting the same advantages from slotted head screws . . . or from any other type you're using.

TO MAKE WARTIME QUOTAS AND PEACETIME PROFITS

Faster Starting: Driver point automatically centers in the Phillips Recess . . . fits snugly. Fumbling, wobbly starts, slant driving are eliminated. Work is made trouble-proof for green hands.

Faster Driving: Spiral and power driving are made practical. Driver won't slip from recess to spoil material or injure worker. (Average time saving is 50%.)

Easier Driving: Turning power is fully utilized. Workers maintain speed without tiring.

Better Fastening: Screws are set-up uniformly tight, without burring or breaking of screw heads. The job is stronger, and the ornamental recess adds to appearance.

IDENTIFY IT!

PHILLIPS *Recessed Head* SCREWS

WOOD SCREWS · MACHINE SCREWS · SELF-TAPPING SCREWS · STOVE BOLTS

23 SOURCES

American Screw Co., Providence, R. I.
Atlantic Screw Works, Hartford, Conn.
The Bristol Co., Waterbury, Conn.
Central Screw Co., Chicago, Ill.
Chandler Products Corp., Cleveland, Ohio
Continental Screw Co., New Bedford, Mass.
The Corbin Screw Corp., New Britain, Conn.
General Screw Mfg. Co., Chicago, Ill.
The H. M. Harper Co., Chicago, Ill.
International Screw Co., Detroit, Mich.
The Lamson & Sessions Co., Cleveland, Ohio
Manufacturers Screw Products, Chicago, Ill.
Milford Rivet and Machine Co., Milford, Conn.
The National Screw & Mfg. Co., Cleveland, Ohio
New England Screw Co., Keene, N. H.
Parker-Kalon Corp., New York, N. Y.
Pawtucket Screw Co., Pawtucket, R. I.
Pheoll Manufacturing Co., Chicago, Ill.
Reading Screw Co., Norristown, Pa.
Russell Burdsall & Ward Bolt & Nut Co., Port Chester, N. Y.
Scovill Manufacturing Co., Waterville, Conn.
Shakeproof Inc., Chicago, Ill.
The Southington Hardware Mfg. Co., Southington, Conn.

DOWMETAL *magnesium products*

THE METAL OF MOTION

ANOTHER DOW SERVICE . . . DIE CASTINGS

. . . BY AMERICA'S LEADING MAGNESIUM PRODUCER AND FABRICATOR

● As the pioneer producers of Dowmetal Magnesium Alloys, Dow developed through years of research, a technique in parts production that helped America get a head start on war necessities. Diecasting of magnesium alloys in Dow's own shops today is helping speed us on to victory.

The virtues of high speed, low cost quantity production are enhanced by the decrease in machining necessary —the dimensional accuracy—the excellent surface finish and the weight saving of Dowmetal die castings. Whether for use on present parts or for those still in the print stage Dowmetal Magnesium Alloys die cast by Dow are ready to go to work for you NOW.

MAGNESIUM DIVISION—THE DOW CHEMICAL COMPANY, MIDLAND, MICHIGAN

New York · Boston · Philadelphia · Washington · Cleveland · Detroit · Chicago · St. Louis
Houston · San Francisco · Los Angeles · Seattle

THE NEWLY-DEVELOPED PIONEER TORQUE AMPLIFICATION AND CONTROL SYSTEM

Magnifies minute forces . . . applies amplified torque remotely

Pioneer Remote Torque Amplification and Control Systems electronically amplify a small motivating force (manual, electrical or mechanical) and apply it at a remote location to accomplish such tasks as controlling aircraft main engines, operating rudders, elevators, flaps, ailerons, or to perform any function, on or off an airplane, requiring positive straight-line or rotary motion to effect an accurate adjustment. These compact, lightweight systems consist of an Autosyn or Magnesyn transmitter (A), which is motivated by the prime mover; an amplifying assembly (B); and a torque unit (C), comprising a coupling Autosyn and low-inertia motor. Write for booklet. Eclipse-Pioneer Division, Teterboro, New Jersey.

"Pioneer," "Autosyn" and "Magnesyn" are trade marks of Bendix Aviation Corporation

PIONEER INSTRUMENTS

THE INVISIBLE CREW
Precision Equipment by
Bendix Aviation Corporation