NOVEMBER 1944
50 CENTS PER COPY

AVIATION

The Oldest American Aeronautical Magazine

IN THIS ISSUE

TERMINATION AND SOLVENCY

—J. Carlton Ward gives a workable plan for proper administration of the contract termination law, a plan which will maintain a solvent aircraft industry — and the air power to keep the peace.

★

HOWS AND WHYS OF HELICOPTER DRIVES

—A thoroughgoing engineering discussion of installations and functions of basic transmission units for three types of 'copters, written by one of the foremost exponents of rotary wing aircraft.

★

BUZZ-BOMB DETAILS

— Sketches and text by an AVIATION editor, revealing hitherto unpublished details of V-1's design and construction.

★

MARKETING PLANE ACCESSORIES

—A case for the distributor, and what he can do to help the retailer.

★

NEW POSTWAR TRANSPORT

—Curtiss-Wright reveals details of peacetime version of famed Commando transport.

McGRAW-HILL
PUBLISHING CO., INC.

Paul Lounsbery

Corsair MANEUVERABILITY

Excellent aileron characteristics, together with many other contributing factors, combine to make the Corsair a highly maneuverable fighter. Its ability to roll fast and easily, even at high speeds, has given the edge to many an F4U pilot.


Superior take-off, climb, altitude, speed, range, fire power, stamina, maneuverability—these make the Corsair an outstanding fighter.

CHANCE VOUGHT AIRCRAFT
STRATFORD, CONNECTICUT
ONE OF THE FOUR DIVISIONS OF UNITED AIRCRAFT CORPORATION


ONE OF A SERIES PORTRAYING THE "SPEED NUT FAMILY OF FASTENINGS"



"...AND WE DO MEAN *Speed!*"



STARTING POSITION



LOCKING POSITION

Greater *Speed* Reduces Assembly Time
Greater *Speed* Cuts Assembly Costs

● This ad is devoted to speed. The word appears 5 times in this message because we want to stress speed first and foremost.


Why? Because you will need better and faster assembly speed in order to win postwar markets in big volume on any product—metal, wood, or plastics.

Designing beautiful postwar products is only the beginning. The winners will be those good looking products that are engineered for better and faster assembly. We have already produced over 2,000 shapes and sizes that have drastically cut assembly time, reduced costs and improved the quality of the finished product. Write for literature.

TINNERMAN PRODUCTS, INC.
2070 Fulton Road, Cleveland 13, Ohio
In Canada: Wallace Barnes Co., Ltd., Hamilton, Ontario
In England: Simmonds Aerocessories, Ltd., London

*Speed Nuts** Patented *Trademark Reg. U. S. Patent Office

FASTEST THING IN FASTENINGS

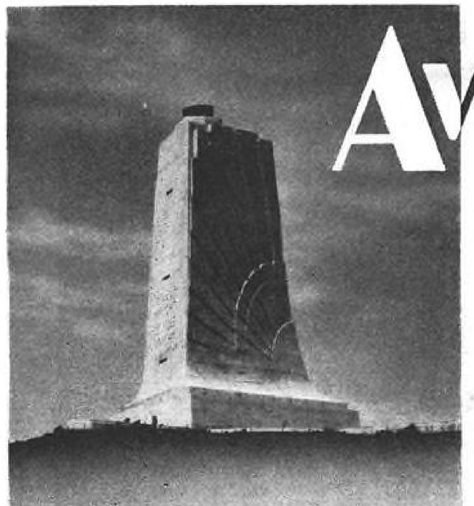

AVIATION

CONTENTS FOR NOVEMBER, 1944

Volume 43 • Number 11

Briefing for November 5
Down the Years in Aviation's Log 5
Editorial: It Takes *Human Relations* 109
Contract Termination—Key to Air Power and Security *J. Carlton Ward, Jr.* 110
Give 'Em the Data . . . And They'll Fix It—Fast ..... *Dick D. Moyer* 112
The Economic Future of Aviation Technology, III *Frederic Flader* 113
What's Ahead for the Helicopter? ..... *C. L. "Les" Morris* 116
Wright Aeronautical Marks 25th Birthday 118
Curtiss-Wright Presents Postwar Transport 120

Marketing
A Place for the Distributor in Aircraft Accessory Sales ..... *Arthur S. Brown* 121
What Kind of Instruments for the Personal Plane? ..... *Frederick H. Smith* 122

Aviation Research—Engineering—Production
Basic Drives for Helicopters ..... *Joseph S. Pecker* 125
Better Fuel Tanks Made Faster 134
Analysis of Continuous Beams Having Variable Moments of Inertia *Donald A. duPlantier* 137
Suspension Mount Controls Instrument Vibration 139
Mass Machining Features Buick Shortcuts ..... *Herbert Chase* 141
How the Hydraulic Fuse Promotes Flight Safety 144
Nomographs Facilitate Sheet Metal Layout ..... *B. Mattson Compton* 146
New Method Banishes Wire-Stripping Risks 148
Plant-Practice Highlights 150
For Better Design 195
Aviation's Sketch Book of Design Detail 201
Aviation's Engineering Data Book 207
Review of Patents ..... *A. Harry Crowell* 210
New Products and Practices 241

Aviation Maintenance
A Plane is as Fit as Its Finish ..... *John Brennan and Ralph Hall* 153
ATSC Tools Save Time, Equipment 156
System Makes the Difference in Instrument Overhaul 159
Lockheed's New Service Forms 162
Snow Doesn't Ground RCAF 164
Quick-Disconnect Simplifies Battery Changes ..... *Don A. Davis* 166
Aviation's Maintenance Notebook 167

Air Transport
Airmail Goes RFD ..... *Edward E. Thorp* 170
How Calculated Cruising Foolproofs Long-Range Flights ..... *James B. Rea* 178
Airspeed-Dial Device Simplifies Range Procedure ..... *Charles A. Mobley* 181

Civil Operations
Mexico Offers Flyers Thin Air . . . And Opportunities . . . *Juan Nolan C.* 182
Parks Plane-Buying Plan Combines Time Payments, Insurance 185

Military
Canada Sets Up Beam-Approach Flight School ..... *James Montagnes* 187
China and U. S. Chip In for New High In Cooperation 189

Flying Equipment
Design and Construction of Nazi V-1 Flying Bomb ..... *Chester S. Ricker* 190

Finance
Preview of Coming Airline Financing ..... *Raymond L. Hoadley* 192

Book Reviews 210

Side Slips 239

The Aviation News
National Aviation 215
War Communique No. 35 219
Washington Windsock 221
Aviation Manufacturing 223
Transport Aviation 227
Aviation Abroad 233
Financial Notes 235
Aviation People 237

George W. Pfeil, *Publisher*
Leslie E. Neville, *Editor*

John Foster, Jr. ..... *Managing Editor*
Herb Powell ..... *Associate Editor*
Edward E. Thorp ..... *Assistant Editor*
Irving Stone ..... *Assistant Editor*
Raymond Hoadley ..... *Financial Editor*
Wm. R. Nelson ..... *West Coast Editor*
Blaine Stubblefield ..... *Washington Editor*
Dallas Mallard ..... *Art Editor*
Paul Wooton ..... *Chief of Washington Bureau*

★ ★ ★

On Leave of Absence With Government Services


Carl Norcross ..... *Colonel, Air Forces*
Charles F. McReynolds ..... *Major, Air Forces*
Jay P. AuWerter ..... *Major, Air Forces*
Randolph Hawthorne ..... *Captain, Air Forces*
Kenneth D. Reynolds ..... *Lieutenant, Infantry*
David Baker ..... *Private, Air Forces*
E. Eugene Miller ..... *Special Assignment*
Don Fink ..... *Special Assignment*

★ ★ ★

Andrew B. Martin, *Sales Manager*

District Managers: Boston, Hunter Snead; New York, Robert F. Boger; Philadelphia, C. M. Edler and E. M. Schellenger; Cleveland, A. H. Bartsch and R. S. Cobb; Detroit, C. W. Evaul; Chicago, A. E. Meanor; St. Louis, W. E. Donnell; Los Angeles, E. W. Potter; San Francisco, John Otterson.

McGRAW-HILL PUBLISHING CO., INC. Publication office 99-129 North Broadway, Albany, N. Y. Return postage guaranteed. Editorial and executive offices, 330 West 42nd Street, New York, 18, N. Y. Branch offices: Chicago, 520 North Michigan Ave.; San Francisco, 68 Post Street; Aldwych House, Aldwych, London, W.C. 2; National Press Bldg., Washington; 16 South Broad St., Philadelphia; Hanna Bldg., Cleveland; 2-144 General Motors Bldg., Detroit; Paul Brown Bldg., St. Louis; 1427 Statler Bldg., Boston; Rhodes-Haverty Bldg., Atlanta; 621 S. Hope, Los Angeles; 738-9 Oliver Bldg., Pittsburgh. JAMES H. McGRAW, Founder and Honorary Chairman; JAMES H. McGRAW, Jr., President; HOWARD EHRLICH, Executive Vice-President for Business Operations; JOHN ABBINK, Executive Vice-President for Editorial Operations; CURTIS W. McGRAW, Vice-President and Treasurer; JOSEPH A. GERARDI, Secretary; J. E. BLACKBURN, Jr., Director of Circulation, Aviation, 330 W. 42nd Street, New York. Published monthly, price 50c a copy, 50c in Canada. Allow at least ten days for change of address. All communications about subscriptions should be addressed to Director of Circulation, 330 West 42nd Street, New York. Subscription rates—United States, Mexico and Central American Countries, $3.00 a year, $4.00 for two years, $5.00 for three years. Canada, $3.50 for one year, $5.00 for two years, $6.00 for three years, payable in Canadian currency at par. Great Britain and British Possessions 30 shillings per year, 60 shillings for three years. All other countries, $5.00 a year, $10.00 for three years. Entered as second-class matter September 3, 1936, at the Post Office, Albany, New York, under the Act of March 3, 1879. Volume 43, Number 11. Printed in U. S. A. Cable Address: "McGraw-hill New York." Member A.B.C. **Copyright 1944 by McGraw-Hill** Publishing Company, Inc., 330 West 42nd Street, New York, N. Y. The contents of this issue are copyrighted and may not be reproduced without the permission of the copyright owner. The following publication is combined with AVIATION: AERONAUTICAL ENGINEERING AIRCRAFT JOURNAL. All rights to this name are reserved by the McGraw-Hill Publishing Co. Aviation is indexed in Guide to Periodical Literature and in Industrial Arts Index.

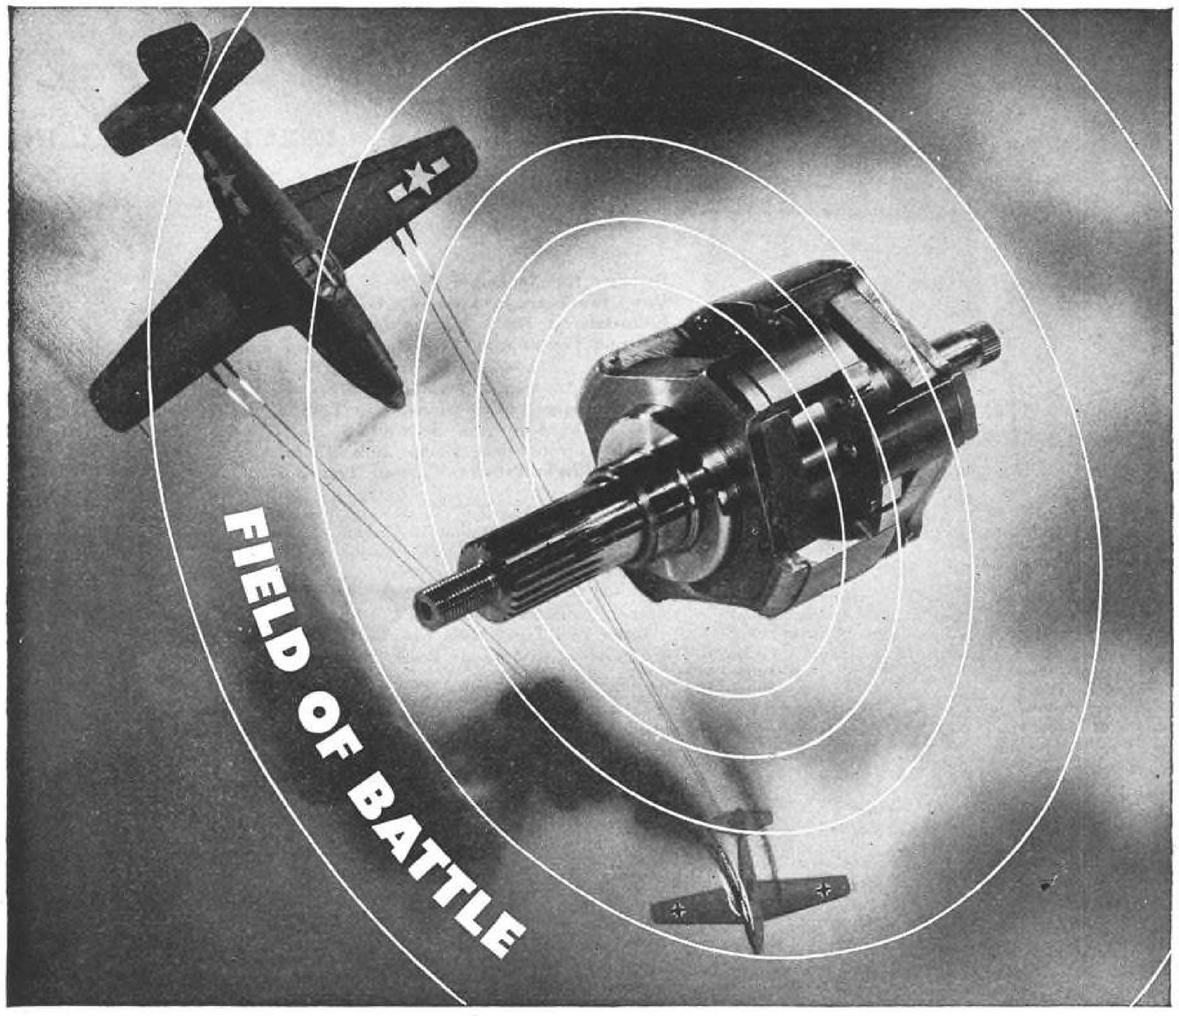

THIS is the field of battle in the sky...the stable field of a rotating magnet...heart of a Bendix-Scintilla* Aircraft Magneto. Into the making of this vital part go superlative steel and precise engineering...for on the strength and stability of its magnetic force depends the generation of sparks to fire the engines of our fighting aircraft.

Bendix-Scintilla engineers have contributed notably to the advancement of Aircraft Ignition. Their inventiveness and practical experience, now wholly devoted to the prosecution of the war, will one day again be applied to the pursuits of peace.



THE WORLD'S FINEST AIRCRAFT IGNITION

Bendix-Scintilla Aircraft Magnetos, Harnesses and Switches, vital members of "The Invisible Crew," are standard equipment for the major aircraft engine manufacturers, including:

Allison • Jacobs • Continental • Lycoming • Lawrance • Wright Aero Corp. • Pratt & Whitney • Warner • Packard • Ranger • Ford • Nash • Chrysler • Kinner.

BENDIX SCINTILLA

SCINTILLA MAGNETO DIVISION
SIDNEY, NEW YORK

THE INVISIBLE CREW — Precision Equipment by Bendix Aviation Corporation

*TRADE MARK OF BENDIX AVIATION CORPORATION

Briefing for November

How to come through contract terminations without going bankrupt is a question causing more gray hairs than anything else in the industry today. Since it's more than vital that this country have an aircraft industry after the war, J. Carlton Ward has gone to bat and come up with a tangible program by which government can do its part to keep this industry solvent. It's on page 110.

AVIATION is particularly pleased, this month, to launch a series on helicopter design which will fill a serious need in the scant literature on rotary wing design. Joseph S. Pecker, a veteran in the field, inaugurates this series with a down-to-earth presentation on power transmission for single rotor, bi-axial, and co-axial craft, and it's illustrated according to our usual standards. Page 125.

Chet Ricker, our Detroit Editor, recently spent a quiet Sunday making a thorough study of Hitler's nastiest—the V-1 buzz bomb. And when Chet makes a study, that includes his inimitable sketches. There are a lot of things revealed as the result of this so-called day of rest. See page 190.


Aircraft accessory manufacturers are finding that their postwar marketing problems have as many kinks as do those of the engine and airframe producers, and exactly what sales setup to use is one of the biggest and toughest puzzles, they report, Arthur S. Brown, sales manager of Scott Aviation Corp., says there's a place for the distributor in accessory marketing; he gives his reasons on page 121.

And speaking of accessories, should anything except the basic engine instruments be considered accessories on personal planes? Frederick H. Smith, of Sperry, tackles this one—also in our Marketing Section—giving his ideas in his article beginning on page 122.

An ingenious mechanization of heliarc welding has meant more than just whipping a tough long-seam job in Curtiss-Wright's St. Louis plant—it also forecasts important production savings in the coming peace. How the job was licked at C-W is told in the article starting on page 134.

The veteran transocean pilot, James B. Rea—now engineering test pilot for Convair—really knows the importance of the fuel vs. payload question. This month he presents a quick method of determining in a hurry, but with complete accuracy, just what to do when the inevitable point-of-no-return is reached. Turn to page 178.

And for the other extreme on transport operations—the short hauls of

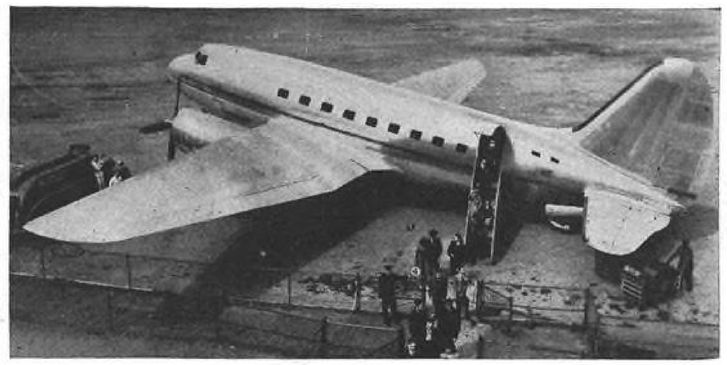

COMMANDO IN PEACETIME GARB. Re-touched photo showing how Curtiss-Wright CW-20E—postwar airline version of C-46—will look as re-designed for commercial service. Other photographs and drawings, also all available details, will be found on page 120.

pickup flights—there's a well rounded story giving details of equipment developed by All American Aviation. Page 170.

Come the end of the war, more and more fixed base operators are going to start figuring the dollars but close as they try to reduce maintenance costs. John Brennan and Ralph Hall, of American Export Airlines, have made a thorough study of finish factors, and what they found is of vital profit-and-loss importance, not only to every airline but also to every man who maintains planes of any size. Page 163.

And also in the usual well-rounded maintenance section is a profusely illustrated article giving details on many time and money saving tools developed around the country by Air Service Command (now part of ATSC); how Embry-Riddle runs instruments through overhaul, with details on many equipment features they built themselves; Lockheed's new maintenance-simplifying service forms; how Canada's RCAF whips the snow problem; and the always-practical Maintenance Notebook.

Financing and insuring the personal planes will, everyone hopes, be a lot bigger business—and a lot more standardized—than it's ever been before. Oliver Parks has worked out arrangements with a bank and insurance underwriter which sets a very definite and practical pattern for local personal plane financing by dealers and distributors everywhere. See page 185.

Down the Years in AVIATION'S Log

25 Yr. Ago (1919) —Post Office announces record of 8,988 mi. per forced landing for past six months, "a very respectable figure" . . . Authorities say variable pitch propeller "seems to have possibilities" . . . Zeppelin Lindau builds 100-ft.-span 4-engine monoplane flying boat with 70 hr. fuel capacity . . . Twin-Liberty-engine Lawson transport carries two pilots and 24 passengers . . . Upson, in Goodyear II, wins first postwar balloon race, traveling 1,050 mi. . . . Navy offers 215 seaplanes and 367 engines for sale.

15 Yr. Ago (1929)—National Air Tour (5.017 mi.) completed by 24 of 29 starting planes . . . Columbus, Ohio, opens first air-rail airport alongside Penn RR. . . . Guggenheim gives another $500,000 to assist aviation; gifts now total $3,000,000. . . . Army orders $1,642,383 planes and parts. . . . Savoia-Marchett's U.S. sales total 105 planes costing $1,685,582 in year. . . . Sikorsky opens new plant at Bridgeport. . . . New York City Police force has 25 trained pilots. . . . Navy asks $6,000,000 for improvements at Pensacola. . . . U.S. now has 83 college flying clubs. . . . Airmail rates to Latin America reduced. . . . Big Ten universities use planes to transport football teams.

10 Yr. Ago (1934)—Scott and Black fly deHavilland Comet from England to Australia in 52 hr., beating former record by 57 hr. . . . Hammond Aircraft wins D. of C. small aircraft competition. . . . Hugo Eckener comes to U.S. to arrange for Zeppelin terminal. . . . Four women pilots fly across continent in formation. . . . Capt. Irving Chambers, developer of catapult for shipboard launchings, dies.




HELICOPTER INSTRUMENTS are called upon to indicate performance of a nature different from that generally associated with the operation of conventional airplanes. Kollsman has already devised a special dual tachometer and synchroscope for experimental helicopter work. A super-sensitive air speed indicator is also called for, because of the helicopter's ability to move at low lateral speeds. The ship's ability to hover and to make slow descents also suggests refinements in rate-of-climb indicators. Whatever the ultimate instrument requirements of the helicopter, Kollsman engineers will be ready with practical and efficient designs, keeping pace, as always, with every advancement in the science and the art of operation.

KOLLSMAN AIRCRAFT INSTRUMENTS

PRODUCT OF

SQUARE D COMPANY

ELMHURST, NEW YORK • GLENDALE, CALIFORNIA

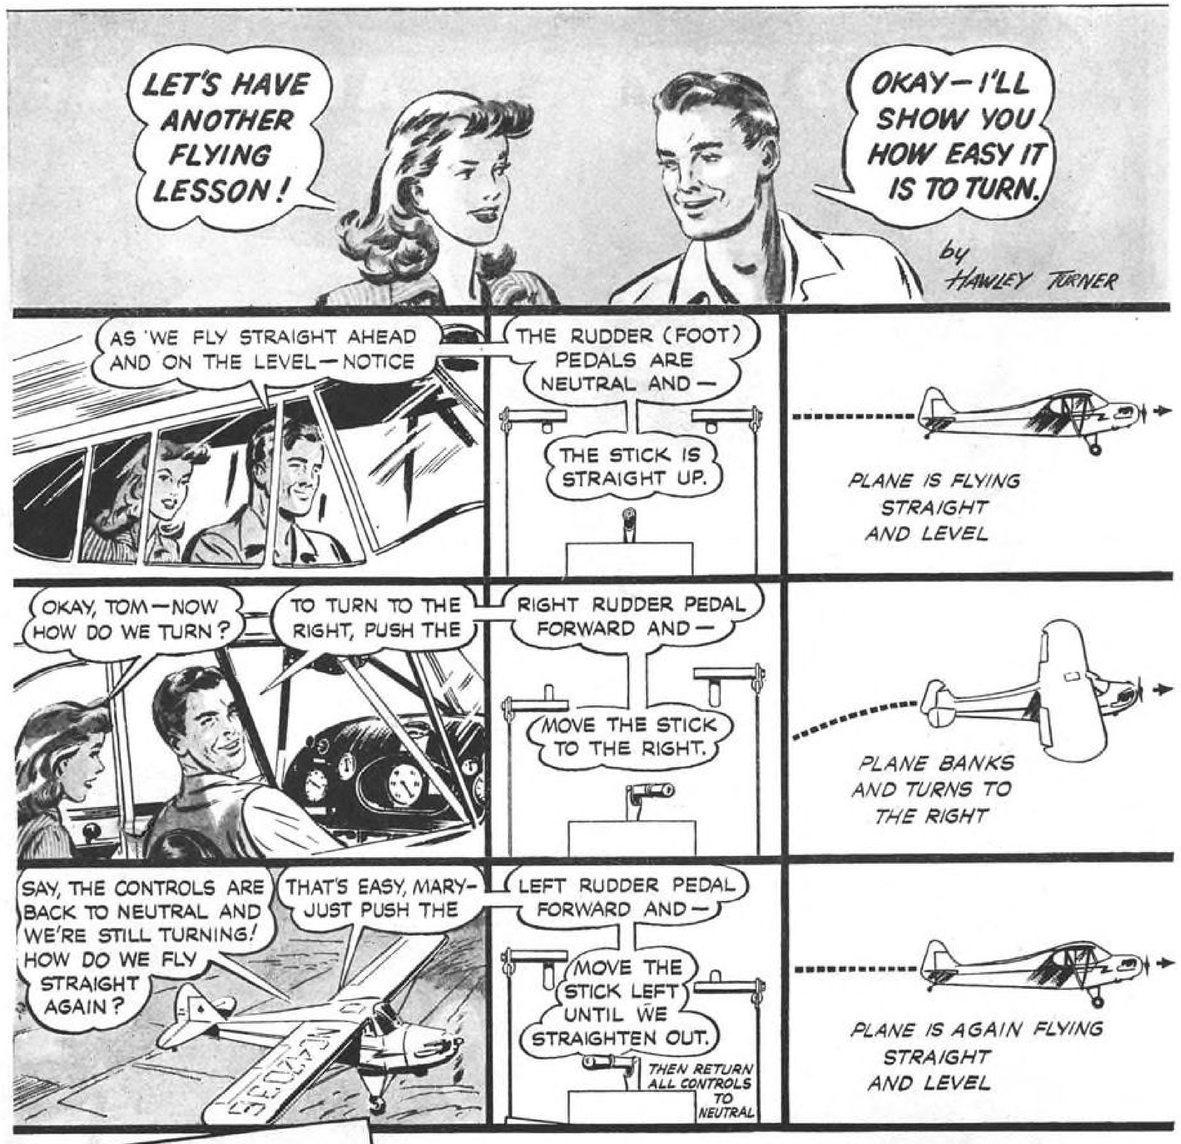

GET YOUR "HOW TO FLY" BOOKLET

New booklet, "How to Fly a Piper Cub," covers the fundamentals of flying with over 50 step-by-step photos and descriptions. Many other facts, full-color pictures of Piper Cubs. Send 10c in stamps or coin for postage-handling. Write Piper Aircraft Corporation, Dept. A114, Lock Haven, Penna.

IS YOUR TOWN READY TO FLY?

It should plan landing facilities now—for its citizens and its future. The booklet, "What Your Town Needs for the Coming Air Age," illustrates various types. It covers benefits, where to build and how to start. For your free copy, write Piper Aircraft Corporation, Dept. A114W, Lock Haven, Pennsylvania.

16mm. SOUND FILM—"The Construction of a Light Airplane." For distribution points write: Supervisor, Audio-Visual Aids, Extension Services, Pennsylvania State College, State College, Pennsylvania.

PIPER "PLANE QUIZ"

1. Which is simpler, the engine in your car or in a Piper Cub?
   The engine in the Cub is much simpler.
2. What is the upkeep and depreciation on a Piper Cub?
   Considerably less than that on a popular-priced car.
3. Who can learn to fly a Piper Cub?
   Anyone 16 to 60 with normal health and judgment.
4. How long does it take to learn to fly a Piper Cub?
   8 hours instruction required before soloing.

This lesson explains only the fundamentals. Keep it with the others that follow. See your Piper Cub dealer for actual flying instructions. Write us "Plane Quiz" questions you want answered.

PIPER AIRCRAFT CORPORATION—LOCK HAVEN, PENNA.

PIPER CUB

Points the Way to Wings for ALL Americans

GOODYEAR AIRCRAFT PRODUCTION REPORT



CURTISS-WRIGHT P-40 (Warhawk)

3,000 SETS STABILIZERS

CONTRACT RECEIVED:	*OCTOBER 1940*
FIRST PRODUCTION UNIT DELIVERED:	*MAY 1941*
100th PRODUCTION UNIT DELIVERED:	*AUGUST 1941*
CONTRACTS COMPLETED:	*FEBRUARY 1943*

Remarks: Speedy delivery of stabilizers for this fast pursuit plane, which bore brunt of early South Pacific and North African operations, proved Goodyear Aircraft Corporation's ability to team successfully with original designer in mass production of important components. Highlight of this production was development of Goodyear Aircraft's own dimpling process for rivet holes, preventing cracking and distortion—insuring better workmanship, fewer rejects, faster production.

Goodyear is building components for sixteen different Army-Navy types of aircraft, including complete Corsair fighters and airships.

HOW GOODYEAR AIRCRAFT CORPORATION SERVES THE AIRCRAFT INDUSTRY

1. By constructing sub-assemblies to manufacturers' specifications.

2. By designing parts for all types of airplanes.

3. By re-engineering parts for quantity production.

4. By building complete airplanes and airships.

5. By extending the facilities of Goodyear Research to aid the solution of any design or engineering problem.

GOODYEAR
A GREAT NAME IN AIRCRAFT

GOODYEAR AIRCRAFT CORPORATION
Pioneers in Engineering Airmetal

Airmetal—T. M. G. A. C.

GOODYEAR

ICE-GRIPS

Conquer Arctic Landing Strips





REPORTS of months of experience with the Ice-Grip tire show this Goodyear development has licked the problem of landing the heaviest type warplane on smooth glare ice.

As the Ice-Grip can be safely used on concrete runways as well as ice, it's helped tremendously the services engaged in transport plane operation and ferry command work between different climate zones.

Powerful ice traction of the Goodyear Ice-Grip is due to thousands of tiny, high-tensile steel springs, securely molded into its tough rubber tread.

Not only do these springs bite into the ice but with this small, multi-spring construction there is no danger of the non-skid element being stripped off and hurled through the wings.

The Goodyear Ice-Grip tire is made in various sizes for a wide range of types of U. S. warplanes. It is one of the time-proved Goodyear line for all makes of land-based and carrier-borne aircraft.

GOODYEAR

THE GREATEST NAME IN RUBBER

AERONAUTICAL RUBBER GOODS • TIRES • TUBES • WHEELS • BRAKES

What's New in Rubber for American Aircraft



BETTER BUSHINGS

Through Goodyear's development work in bonding rubber to metal, it is now possible to offer the aircraft industry metal bushings with rubber linings for use in engine suspension systems, panel mounts, cowl doors, etc. These cylindrical bushings are made to individual specifications and specific applications and can be used in torsion, shear or compression as required.



SKID STUFF


Landing skids for gliders are among the products this new aviation development has caused Goodyear to place in production. In fact, in addition to tires, tubes, wheels and brakes for these motorless craft, Goodyear offers bonded couplings, bumpers and washers. Any inquiries on this specialized subject are invited.




BRING YOUR "HEADACHES" TO HEADQUARTERS

Backed by the resources of the finest Research Laboratory in the industry and more than 30 years' experience in developing airplane tires, tubes, wheels, brakes and other accessories, Goodyear engineers are ready to help you in working out any application. Address: Goodyear, Aeronautics Dept., Akron 16, Ohio or Los Angeles 54, California.

BUY WAR BONDS • BUY FOR KEEPS




HEAT RESISTANCE Carpenter Stainless No. 4-TI or No. 4-CB used in the aircraft exhaust manifolds like that shown above, are typical of a wide range of Stainless grades that meet high temperature service requirements.



WEAR RESISTANCE Stoker worms like this in thousands of homes and industrial plants can be installed and forgotten because Carpenter Stainless Steels Nos. 4 & 6 provide the wear and corrosion resistant qualities necessary to keep them constantly on the job, with minimum replacement.



HIGH STRENGTH/WEIGHT RATIO This speedboat propeller shaft, made from Carpenter No. 8 Free-Machining Stainless transmits maximum horsepower through a minimum diameter. The shaft must remain absolutely straight, even when subjected to sudden power and torque thrusts. And this Stainless provides ample protection against salt water corrosion. If you are looking for similar advantages in your postwar products, investigate easy-working Carpenter Stainless Steels now!



ELECTRICAL RESISTANCE The uniform electrical resistance and easy-forming properties of Carpenter Stainless No. 1-JR are essential in this edge-wound resistor coil used in cargo ships.

You Get CORROSION RESISTANCE.....

Plus these SPECIAL PHYSICALS with Carpenter Stainless!



Have you considered the many advantages that can be obtained for your new or redesigned products through the special physical properties provided by Carpenter Stainless Steels? On these pages we attempt to show you some of the many physicals that are available to you in various Carpenter Stainless grades. Right here may be the answer to giving your postwar products greater utility, broader sales appeal.

Carpenter, as pioneer in the development of soft and ductile Stainless Strip and inventor of Free-Machining Stainless bar stock—has always made a specialty of producing Stainless Steels to do specific jobs. Our experienced representatives can help you select the Carpenter Stainless grades whose physical properties most fully meet your requirements. Careful laboratory control and exacting inspection assure consistent uniformity, lot after lot, in the Stainless you receive.

This service means that when your designer specifies Carpenter Stainless he can secure the special physicals he desires, as well as easiest fabricating qualities. This all adds up to faster production, fewer rejects, and lower unit costs for your postwar products.

Give Your Products These Advantages

- Sales Appeal
- Everlasting Beauty
- Freedom from Rust
- No Plating to Peel
- Weight Saving
- Strength and Rigidity
- Ease of Assembly
- Fewer Service Complaints

Call in your nearby Carpenter representative now and take full advantage of his diversified Stainless experience in helping to get the best results with Stainless. But do it today, for planning time is getting short.

THE CARPENTER STEEL COMPANY, 128 W. BERN ST., READING, PA.

more than corrosion resistance

Carpenter STAINLESS STEELS

BRANCHES AT Chicago, Cleveland, Detroit, Hartford, St. Louis, Indianapolis, New York, Philadelphia

Double Row PN Needle Bearing Gives Greater Stability

ESPECIALLY IMPORTANT UNDER COUPLE-LOAD CONDITIONS OF AIRCRAFT PULLEY OPERATION

•


The double row PN Type Torrington Needle Bearing has unusual stability as well as a low friction coefficient under widely varying degrees of cable pull-off or misalignment.

The double row PN Needle Bearing is, therefore, ideally suited to such applications as aircraft pulley operation where perfect alignment is difficult to obtain and where friction must be held to a minimum under all operating conditions.


The accompanying cross-section indicates how the use of two rows of small diameter needle rollers resists the couple-loading encountered—one row carrying the couple in one direction; the other resisting the couple in the opposite direction. Thus the exterior force is resisted by the radial forces within the bearing which are properly distributed in opposite directions on the two sets of needle rollers.

Under conditions of severe misalignment and heavy loads, tests have conclusively demonstrated that Needle Bearing equipped aircraft pulleys will maintain pulley alignment with minimum friction.

This increase in stability coupled with other advantages of high capacity, light weight, and efficient lubrication, which the double row PN Needle Bearing offers makes it an ideal anti-friction unit for aircraft pulley and similar applications.

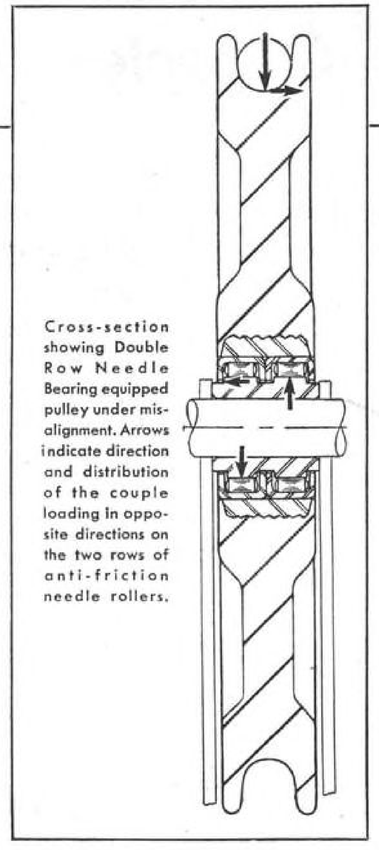

Cross-section showing Double Row Needle Bearing equipped pulley under misalignment. Arrows indicate direction and distribution of the couple loading in opposite directions on the two rows of anti-friction needle rollers.



The Double Row PN Bearing

Needle Bearing equipped aircraft pulleys* are currently available from leading pulley manufacturers who will gladly supply further information.

Test data on operating characteristics of the PN Needle Bearing under many types of service conditions is available. A copy of this data for your engineering files will be supplied on request.

**Fully conforms to AN-FF-P-796 specifications for aircraft pulley bearings.*

• • •

THE TORRINGTON COMPANY

Established 1866 • Torrington, Conn. • South Bend 21, Ind.

"Makers of Needle Bearings and Needle Bearing Rollers"


New York	Boston	Philadelphia
Detroit	Cleveland	Seattle
San Francisco	Chicago	Los Angeles
Toronto		London, England

"LET'S GO U.S.A." KEEP 'EM FLYING

TORRINGTON
NEEDLE BEARINGS

EDO FLOAT GEAR

All-metal seaplane floats for every type of aircraft

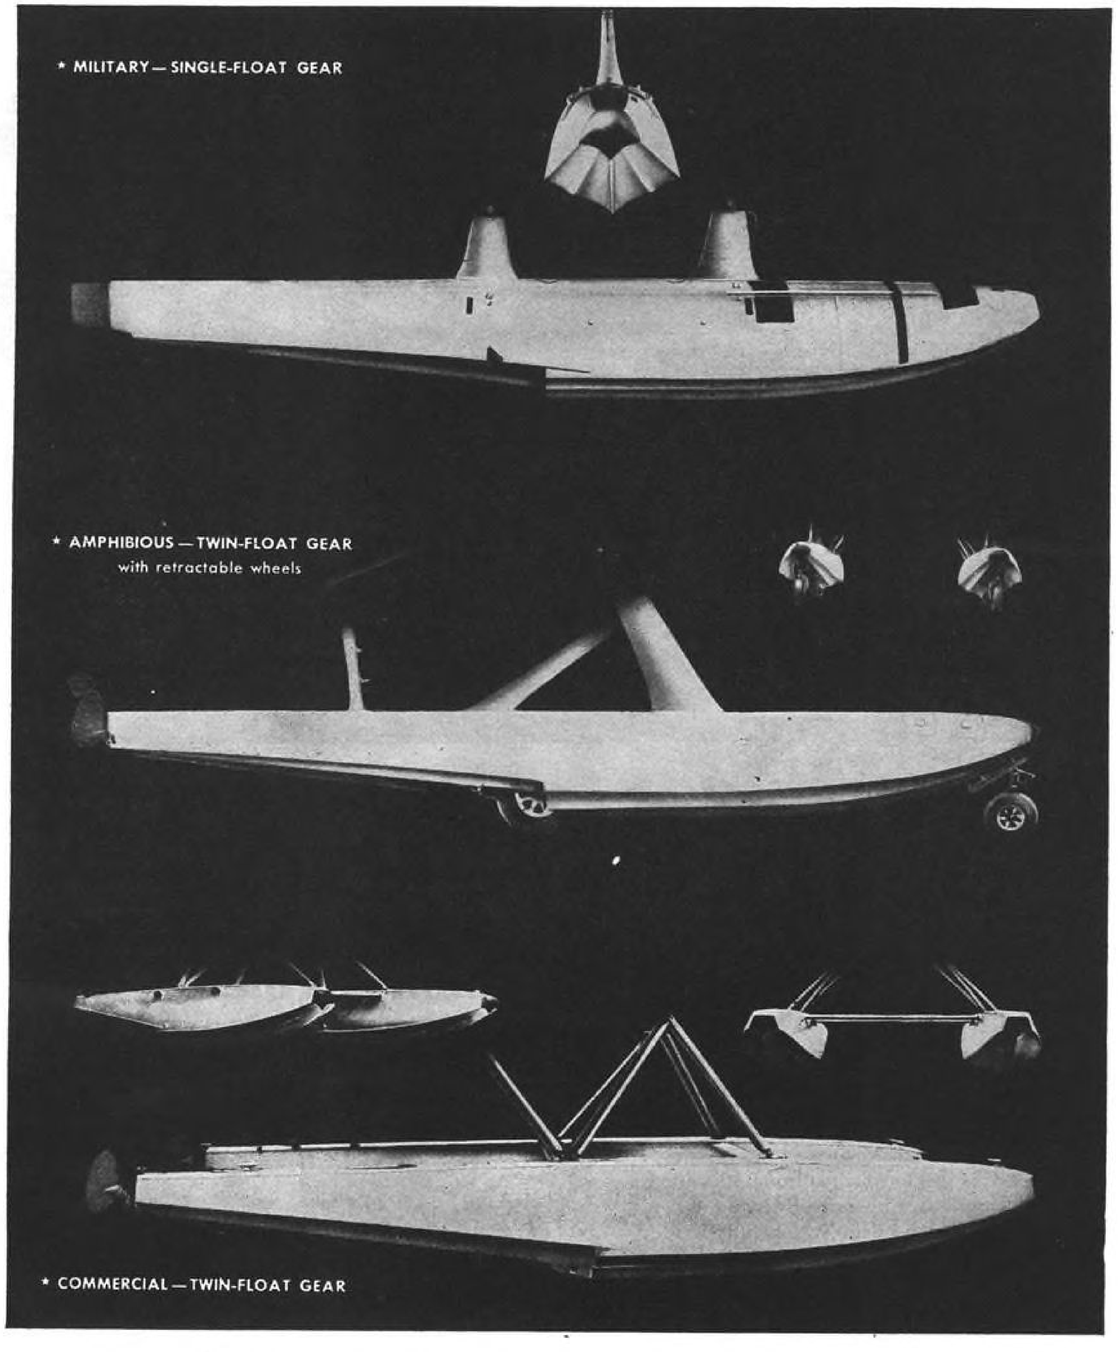


Edo Aircraft Corporation

Contractors to the U.S. Navy and U.S. Army Air Forces and Allied Governments

402 SECOND STREET, COLLEGE POINT, N. Y., U. S. A.

Amazing new war vehicle travels in water ...glides like a ghost over swamp or sand

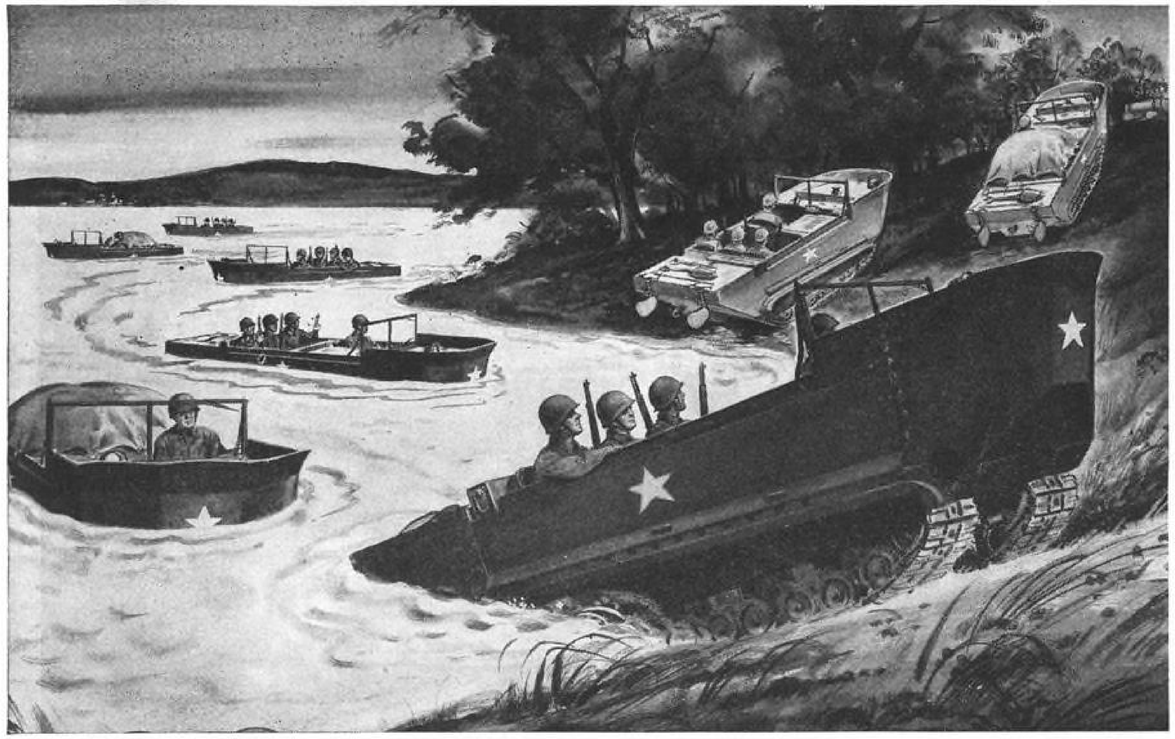

Army's latest Weasel M-29C


Built by Studebaker and powered by famous Studebaker Champion engine

HERE'S a brand-new example of the teamwork of the Office of Scientific Research and Development, the War Department and Studebaker engineers . . . It's the latest model of the Army's versatile track-laying vehicle known as the Weasel . . . This new M29C is just as much at home in water as it is on sand, mud, swamp or solid ground . . . It not only propels itself in deep water, fully loaded, but it also clambers up and down steep, slippery banks with amazing ease . . . This new Weasel M29C is built by Studebaker under contract with the Ordnance Department, Army Service Forces. It's powered by the famous Studebaker Champion engine . . . It adds another important unit of war production to an impressive Studebaker list that already includes Studebaker-built Wright Cyclone engines for the Boeing Flying Fortress and heavy-duty, multiple-drive Studebaker military trucks.



Here's a Weasel designed for snow operation

It's camouflaged like the crafty animal for which it's nicknamed. And the M-29 pictured is almost invisible as it glides swiftly and stealthily over seemingly impassable winter terrain.



Sure-footed even in shifting sand

The Weasel, with its Studebaker Champion power and flexible, rubber-padded tracks, has an uncanny ability to get through places where many other war vehicles would bog down.

"Stopping on a Dime"

is too slow for the War-Time Textile Industry



Zero inertia for reciprocating parts would give the machine designer an ideal condition. No slowing down for the turns. Parts could jump from full speed in one direction to full speed in the other.

Magnesium goes a long way toward providing that kind of equipment. The ring holders shown above, for example, are so light in weight that their direction of travel can instantly be reversed without much worry about inertia. Spinning and twisting machines can be run at higher speeds without setting up excessive vibration. Production is greater, quality higher, machine life longer.

Die cast by American Magnesium Corporation, these parts are light, strong and accurate. They are ready to go to work after a minimum of machining. Fabrication costs are low.

Magnesium is now available to manufacturers of other-than-war products, with W.P.B. approval. American Magnesium is equipped to take care of your requirements for die castings, permanent-mold and sand castings, forgings, extruded shapes and sheet. Our representatives will gladly discuss the availability of magnesium products with you. Aluminum Company of America (Sales Agent for Mazlo Magnesium Products) 1713 Gulf Building, Pittsburgh 19, Pennsylvania.

MAGNESIUM MAZLO PRODUCTS

AMERICAN MAGNESIUM CORPORATION

SUBSIDIARY OF ALUMINUM COMPANY OF AMERICA

A Triumph of Planning



So writes

WALTER DORWIN TEAGUE

noted industrial designer, in describing Bell Aircraft's advances in aircraft production for the war effort today... for *all* tomorrow.



Sealing tubes with the Marsh Metal Tube Seal — a Bell Aircraft innovation now widely used by the aircraft industry.

"I WITNESSED a triumph of planning when I walked through Bell Aircraft's Niagara Frontier Division Plant. I have seen many impressive plants but seldom such perfect order and such high efficiency on so vast a scale.

"It was easy to sense the pride of craftsmanship in the men and women who work there: it became vocal in the machinist who demonstrated his tube-bending machine for me, and the foreman who showed the method he himself had invented for sealing aluminum hydraulic tubes to keep them dust-free.

"And then, from this demonstration of perfected techniques, we went to the laboratories, where scientific knowledge and inventive genius must still work with experimental methods to solve problems that have no precedent. Instead of the calm assurance of the big assembly plant, the atmosphere here in these technological maternity wards was one of barely suppressed excitement: hurry, tension, exhilaration, but above all, confidence.

"This was an event to be remembered, because I saw for the first time two of the most spectacular developments in aviation: I saw the Bell helicopter hover and swing under perfect control within reaching distance of the ground, and I had my first glimpse of a jet propulsion plane. The Bell crowd evidently is as adept at design as it is skilled in manufacturing.

"There are many people I know whom I'd like to take through that plant and those laboratories. They would have a better understanding of what modern industry has grown into now that it's really hitting its stride, and what the future offers in aviation progress for our nation's prosperity."

★ *Buy War Bonds and Speed Victory* ★

MEMBER AIRCRAFT WAR PRODUCTION COUNCIL...EAST COAST, INC.

BELL *Aircraft*

PACEMAKER OF AVIATION PROGRESS


NIAGARA FRONTIER DIVISION
Buffalo and Niagara Falls, N. Y.
Airacobra (P.39) and Kingcobra (P.63)—Fighters
Airacomet—America's First Jet Propelled Plane
The Bell Helicopter

ORDNANCE DIVISION
Burlington, Vt.
Flexible Gun Mounts and other ordnance materials

GEORGIA DIVISION
Marietta, Ga.
B-29 Boeing Superfortress

© Bell Aircraft Corporation

An ALL-PURPOSE TAP?

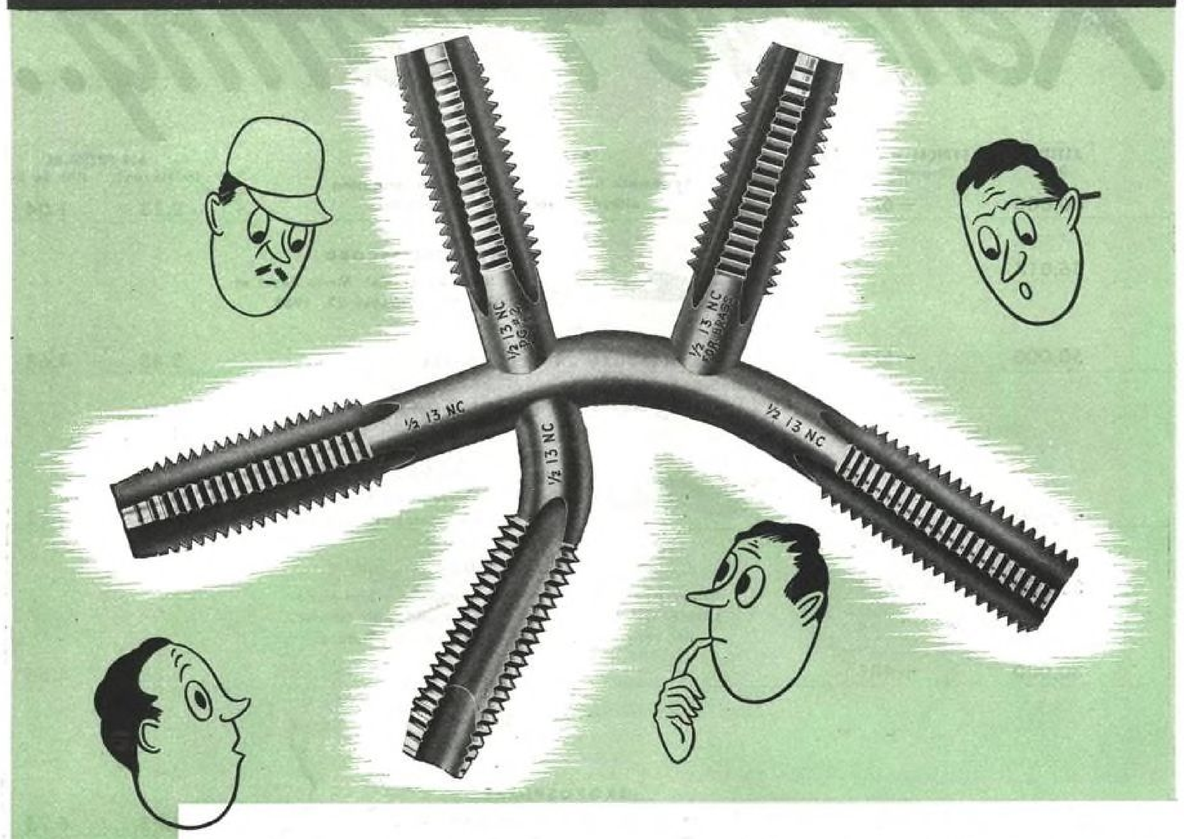

..there ain't *NO SUCH THING!*

But, there *is* a tap for every purpose! Every material, almost every type of threading job, requires a particular tap or die built to do the particular job.

Don't waste time and money experimenting when you meet new thread-cutting problems. The Greenfield Tap and Die Corporation maintains a complete staff of field men and factory engineers whose accumulated experience in all phases of thread-cutting is readily available to you.


GTD GREENFIELD

Simply call your "Greenfield Man" through your Greenfield Distributor



GREENFIELD TAP and DIE CORPORATION • Greenfield, Massachusetts

Reliable Heating..

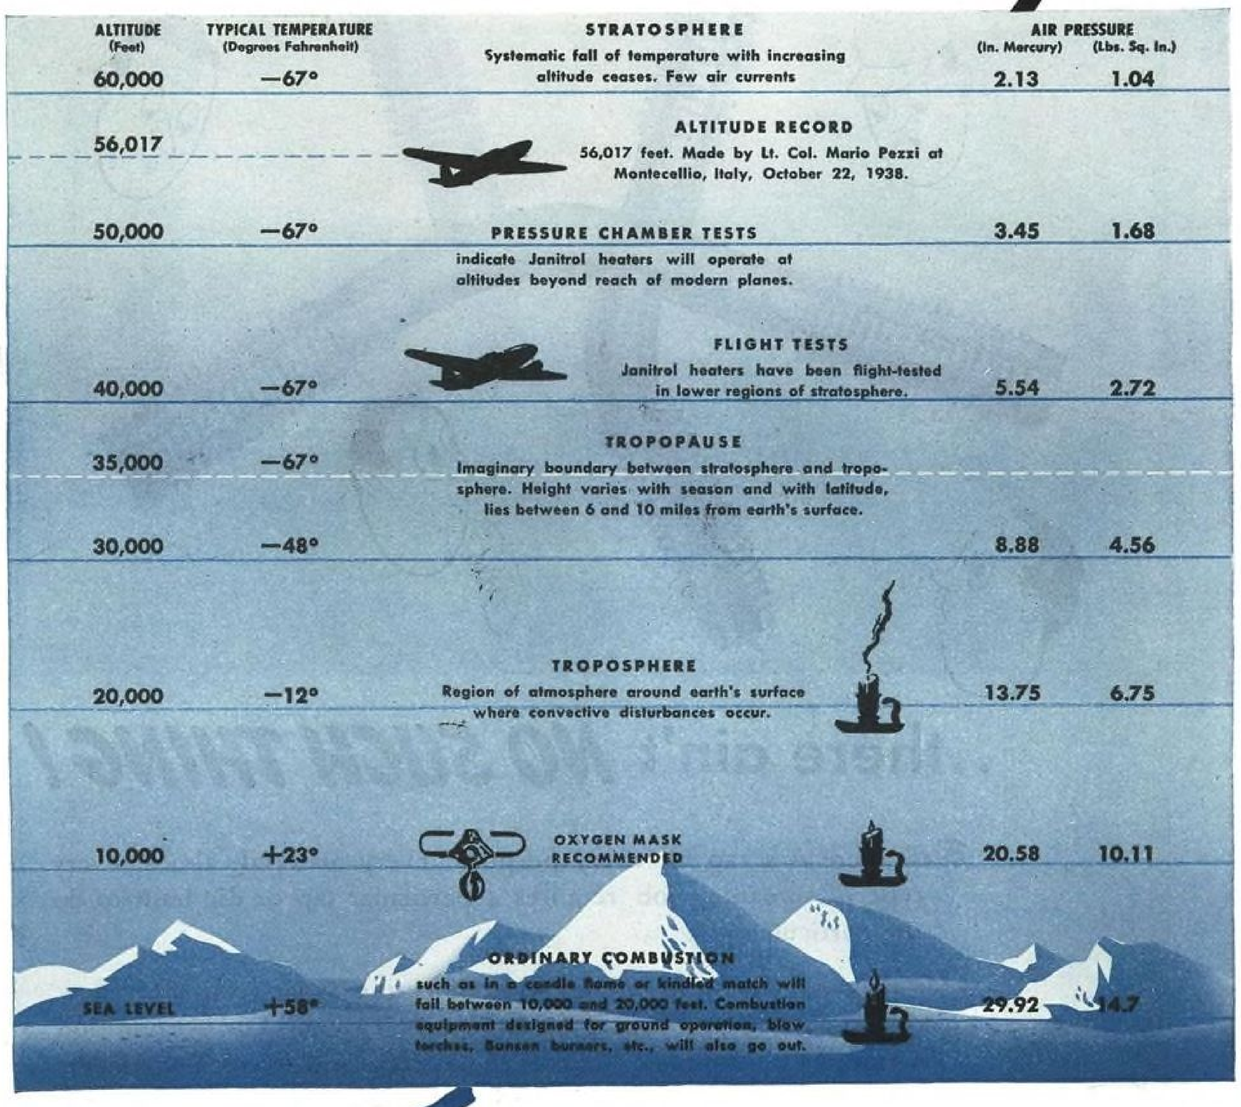

Janitrol

SURFACE COMBUSTION • TOLEDO 1, OHIO


ON THE GROUND...IN FLIGHT... AT EXTREME HIGH ALTITUDES

DEPENDABLE performance at high altitudes is one of the outstanding characteristics of Janitrol Aircraft Heaters. The Whirling Flame principle around which all the Janitrol heaters are designed was specifically developed by Surface Combustion engineers to compensate for rapid changes in air density and temperature at high altitudes.


Janitrol Aircraft Heaters, based on the Whirling Flame principle, are now heating Army, Navy and commercial planes in routine flights in the stratosphere, and at intermediate altitudes. In flight they operate on ram air or with fan. And for service in the coldest climates, these heaters can also be fan equipped for preflight ground heating.

These "all-altitude" heaters are lightweight and compact. They require a minimum weight of fuel tubing and duct work. Standard models give capacities ranging from 15,000 to 125,000 B.t.u. per hour output—units with larger capacities will soon be available.


Surface Combustion engineers are ready to work with you and give you the benefit of their wide experience on the application and installation of various types of Janitrol heaters in all types of planes, boats, buses, trucks and other mobile equipment. For complete specification data, write Surface Combustion, Aircraft Heater Division, Toledo 1, Ohio.

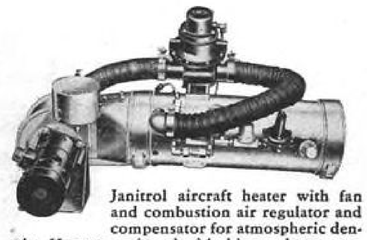

Janitrol aircraft heater with fan and combustion air regulator and compensator for atmospheric density. Heaters equipped with this regulator operate efficiently at highest flying altitudes.



For operation in intermediate altitudes this heater is equipped only with a combustion air relief valve to compensate for changes in volume of air due to changes in plane speed.



For engine and cockpit warming, glass-defrosting and other heating functions on the ground, Janitrol heaters are fan equipped as shown above.



This portable, self-contained ground heater furnishes reliable heat for engines, hangars, work shops, to dry out condensation and for many other purposes, will operate at temperatures as low as 40° below zero.

MAKERS OF:

JANITROL Aircraft and Portable Heaters • JANITROL Gas-Fired Forced Air and Gravity Furnaces, Unit Heaters and Conversion Burners for commercial, industrial and residential heating • S. C. Industrial Heat-Treating Furnaces, Special Atmosphere Generators and Industrial Gas Burners • KATHABAR Humidity Control Systems

Manufacturing Plants at:

TOLEDO, OHIO • COLUMBUS, OHIO

Engineering Offices at:

NEW YORK • CHICAGO • LOS ANGELES SAN FRANCISCO AND OTHER PRINCIPAL CITIES

America's oldest and largest manufacturer of gas-fired industrial and domestic heating equipment, with more than 30 years' experience in combustion research, and in the application, control and transfer of heat.

E-L INCREASES RELIABILITY AND EFFICIENCY OF AIRCRAFT RADIO COMMUNICATION



VIBRATOR Power Supplies are enjoying increased acceptance in the aviation field as battery-power converters for instrument panel illumination, flashing wing light operation and aircraft radio operation. Their complete reliability, efficiency, and assured high altitude operation are the added safety factors that are vital to the aircraft industry.

A recent E-L development, permitting synchronized operation of two vibrators in parallel, provides double assurance of uninterrupted airway communications. Both light and heavy-duty vibrators are specially designed for complete reliability at high altitudes.

The life of Vibrator Power Supplies is far beyond the C.A.A. overhaul requirement. Maintenance time is reduced considerably because it is not necessary to tear down and rebuild a Vibrator Power Supply.

E-L pioneered in the field of vibrator conversion of current. The development of this method of power adaptation has led to many exclusive E-L advantages such as constant output voltage despite wide fluctuations of input voltages, and power output up to 1,000 watts. These features, combined with the proved reliability, efficiency, and minimum maintenance, make E-L Vibrator Power Supplies ideal for aircraft use.

E-L engineers are available to discuss your power supply problem and to design Vibrator Power Supplies to meet specific voltage, power, size and weight requirements.

Model SC-1096 is a typical E-L Vibrator Power Supply which meets the requirements of aircraft radio use. This unit was designed for the Canadian Signal Corps to operate radio transmitters.


Input voltage: 12 volts DC, or 110-117 volts AC at 50-60 cycles

Output voltage: 2000 volts at 125 ma., 400 volts at 25 ma., 250 volts at 10 ma., 250 volts at 5 ma., 10 volts at 5 amps., 12 volts at 1 amp.

Output power: 480 watts

Dimensions: 17" x 12⅜" x 7¾"

Other E-L Units are available for flashing wing lights and for instrument panel illumination. They have wide application in the light plane field as well as for large aircraft.

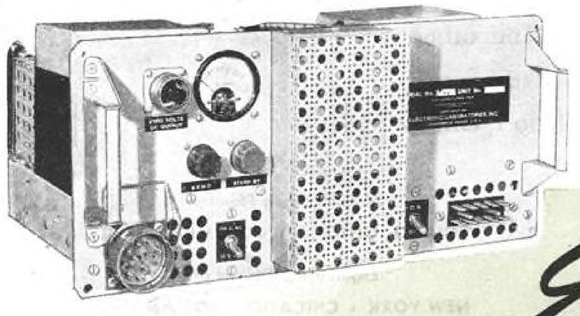

Electronic

LABORATORIES INC.

INDIANAPOLIS

VIBRATOR POWER SUPPLIES FOR LIGHTING, COMMUNICATIONS, AND ELECTRIC MOTOR OPERATION · ELECTRIC, ELECTRONIC AND OTHER EQUIPMENT




Type FBSS Aviation Hose Clamp

Some of the Wittek Aviation Hose Clamps used on the 2,000 H.P. Pratt & Whitney engines that power the Curtiss C-46 Commando

Standard in the Aviation Industry

WITTEK

Aviation Hose Clamps

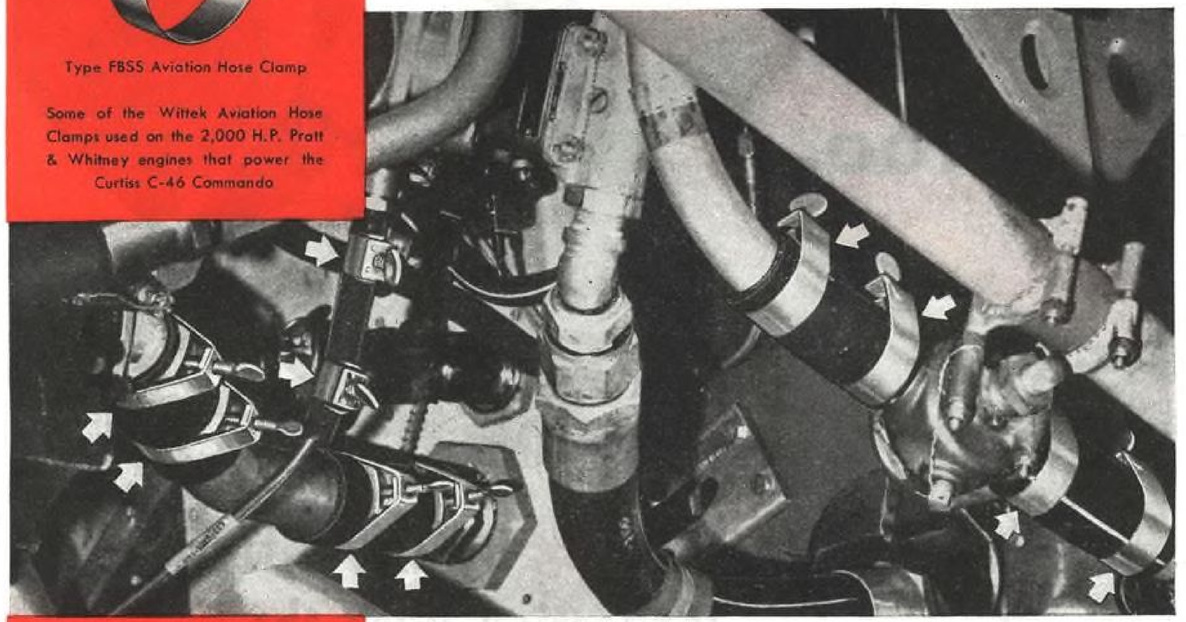



Type WWD Worm Drive Aviation Hose Clamp

Wittek now offers two distinctly different aviation hose clamps complying with the requirements of specification AN-FF-C-406A.

Type FBSS—is manufactured in the standard AN-748 sizes and incorporate a bridge extender which provides uniform sealing characteristics. This is the most effective type hose clamp for all applications in which an adjustable clamp is not necessary.

Type WWD—a worm drive stainless steel hose clamp which, because of its wide range of adjustment, is the most effective clamp for uses where a clamp capable of accommodating various diameters of hose is necessary.

These two Wittek Aviation Hose Clamps are made from stainless steel, and combine the superior physical qualities of that material with the well-known Wittek qualities of superior service and high dependability. There is a Wittek Hose Clamp to meet every requirement of the Aviation Industry. Write for new descriptive catalog.

War Bonds for Victory

Buy MORE in '44

WITTEK MANUFACTURING CO.

4305-15 West 24th Place, Chicago 23, Ill.

Aviation HOSE CLAMPS

in Maintenance too...





Simply insert conductor into Burndy connector barrel



Quickly indent with the HYTOOL



You have the same original indent connection

Be Sure by indenting every connection with the HYTOOL!

Virtually *every* electrical connection on *every* plane you work on is a *pressure-type* connection. This method of connecting was used by the manufacturer originally, because it assures electrical connections of *maximum strength* and *conductivity* . . . and with the *highest safety factor*. So maintain your circuits in the same *sure* way . . . whether you've got the dramatic job of keeping a big bomber up there pitching, or keeping a civilian craft flying at home. In either case, *you* have a *heavy stake* in sound electrical connections! *Don't risk a faulty one.* Be sure you make *every* connection with the HYTOOL. For complete information on Burndy HYDENT connectors (indent-type) and HYTOOLS, write to Burndy Engineering Co., Inc., 107 Bruckner Blvd., New York 54, N. Y.



Headquarters for CONNECTORS

Burndy

Have You Checked on your Grinding Jobs?

...on the use of NORTON RESINOID WHEELS?



It took Norton laboratory men thousands of man-hours to perfect the various Resinoid Grinding Wheel bond formulas for the various jobs such as weld grinding, disc grinding, snagging, thread grinding, cutting off, roll grinding, billet grinding.

Just for example, has your shop tried a Norton 24-Q4T-H specification for weld grinding,—

or, a 14-P4T-L for snagging steel castings when using a swing frame machine, or a 3714-O4T for snagging cast iron?

Have you made use of Norton engineering "know-how"?

NORTON COMPANY
Worcester 6, Mass.
Distributors in All Principal Cities
Behr-Manning, Troy, N. Y., is a Norton Division


A Logan SCREW CUTTING LATHE BECOMES A TURRET LATHE WITH THIS ASSEMBLY



No. 200 Back Geared Screw Cutting Lathe (Floor Model)




No. 820 Quick Change Gear Lathe

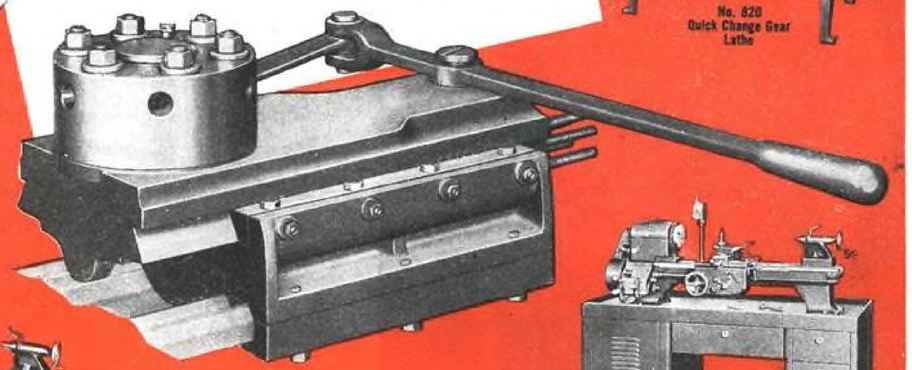





No. 210 Back Geared Screw Cutting Lathe (Bench Model)



No. 825 Quick Change Gear Cabinet Lathe



LA-29 Double Tool Post Cross Slide

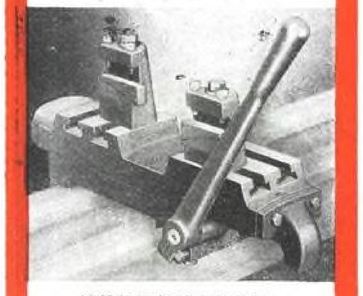

LA-25 Double Tool Post Cross Slide

DOUBLE TOOL POST CROSS SLIDES

For use in connection with the Turret Assembly. No. LA-29 is interchangeable with your present Compound Rest. No. LA-25 fits on bed of your present lathe.

With the Logan 6-Position, Self Indexing Turret Assembly, your present Logan Screw Cutting Lathe becomes a *dual purpose* lathe of sustained accuracy, equally dependable for general purpose work, or for high speed production. The Logan Turret Assembly will fit the bed of your screw cutting lathe perfectly, so that tailstock and turret are interchangeable to meet the job in hand. To guarantee accuracy, the Turret Assembly is shipped to you rough bored to 9/16" so that you can finish bore it to 5/8" from your own headstock. Check with your Logan Lathe dealer regarding the advantages and the economy to be gained by equipping your present lathe with the Logan Turret Assembly.

FOR MAXIMUM EFFICIENCY, USE THESE STANDARD LOGAN TURRET LATHES



No. 830 Hand Screw Machine




No. 840 Quick Change Gear Turret Lathe



No. 850 Manufacturing Turret Lathe

Logan **LOGAN ENGINEERING CO.**
CHICAGO 30, ILLINOIS
A NAME TO REMEMBER WHEN YOU THINK OF LATHES

THIS INTERSTATE UNIT WEIGHING *52 pounds* LIFTS A LANDING GEAR WEIGHING ALMOST *a TON*

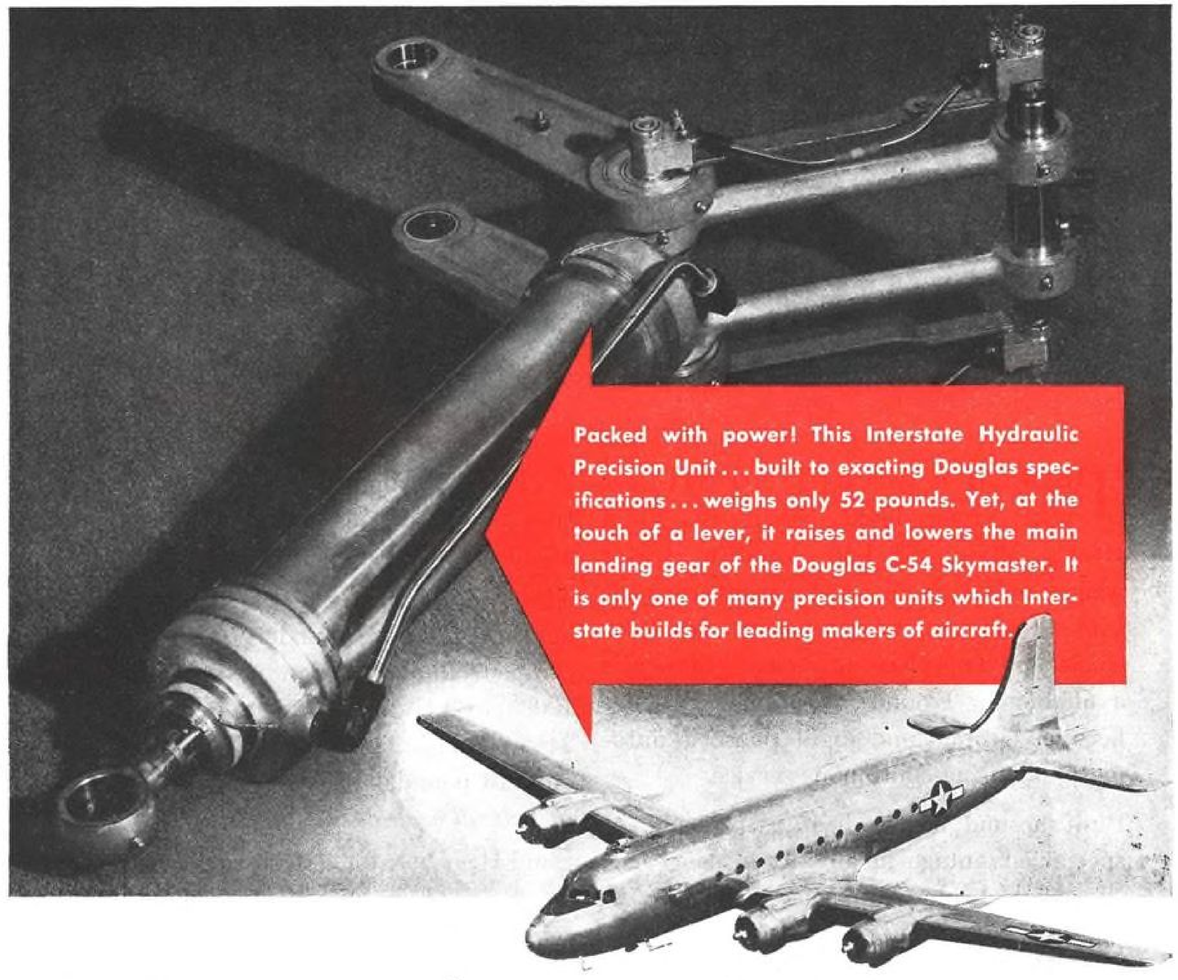

Packed with power! This Interstate Hydraulic Precision Unit . . . built to exacting Douglas specifications . . . weighs only 52 pounds. Yet, at the touch of a lever, it raises and lowers the main landing gear of the Douglas C-54 Skymaster. It is only one of many precision units which Interstate builds for leading makers of aircraft.

Designed by Douglas —
built by Interstate

AIRCRAFT AND ENGINEERING CORPORATION EL SEGUNDO, CALIFORNIA

Another fluid heat Aircraft Heating Achievement . . .

The Lightest 15,000 BTU Heater on the Market!

THOUGH it delivers 15,000 BTU per hour under flight conditions, Fluid Heat's Model SRH-15 Aircraft Heater weighs only 6 pounds, 14 ounces, *complete with all controls and accessories*. Ideal for single and two-place airplanes. Blower is available for ground operation. Transfer between ground and flight phase is automatic, assuring continuous service.


Built around a new heating principle of special advantage in aircraft heating, this super-light heater employs a vapor-entraining process utilizing pre-heated combustion air. The process accomplishes combustion with an unusually low pressure drop, permitting operation at low ram pressures. It produces a completely suspended fire and therefore gives freedom from lead oxide formation. Flame retention is so positive that flame characteristics are the same from sea level to ceiling. Automatic compensation assures high combustion efficiency at all air speeds.

The same characteristics and outstanding lightness feature all models of Fluid Heat's complete line of aircraft heaters. The 100,000 BTU unit, for instance, weighs but 24½ pounds. The 50,000 BTU unit weighs only 16 pounds, 10 ounces. *These weights include all controls and accessories.*

Fluid Heat has, for sixteen years, led in the development and manufacture of automatic combustion and heat transfer equipment. Those years of heat engineering know-how are built into each light, compact, efficient Fluid Heat Aircraft Heater. You will want Fluid Heat Aircraft Heaters on planes you design, build or equip. Write us at the address below for full information on this major new heating achievement.

FLUID HEAT DIVISION
Anchor Post Fence Co.
6740 Eastern Ave., Baltimore 24, Md.


6 lbs. 14 oz.
complete with all controls and accessories

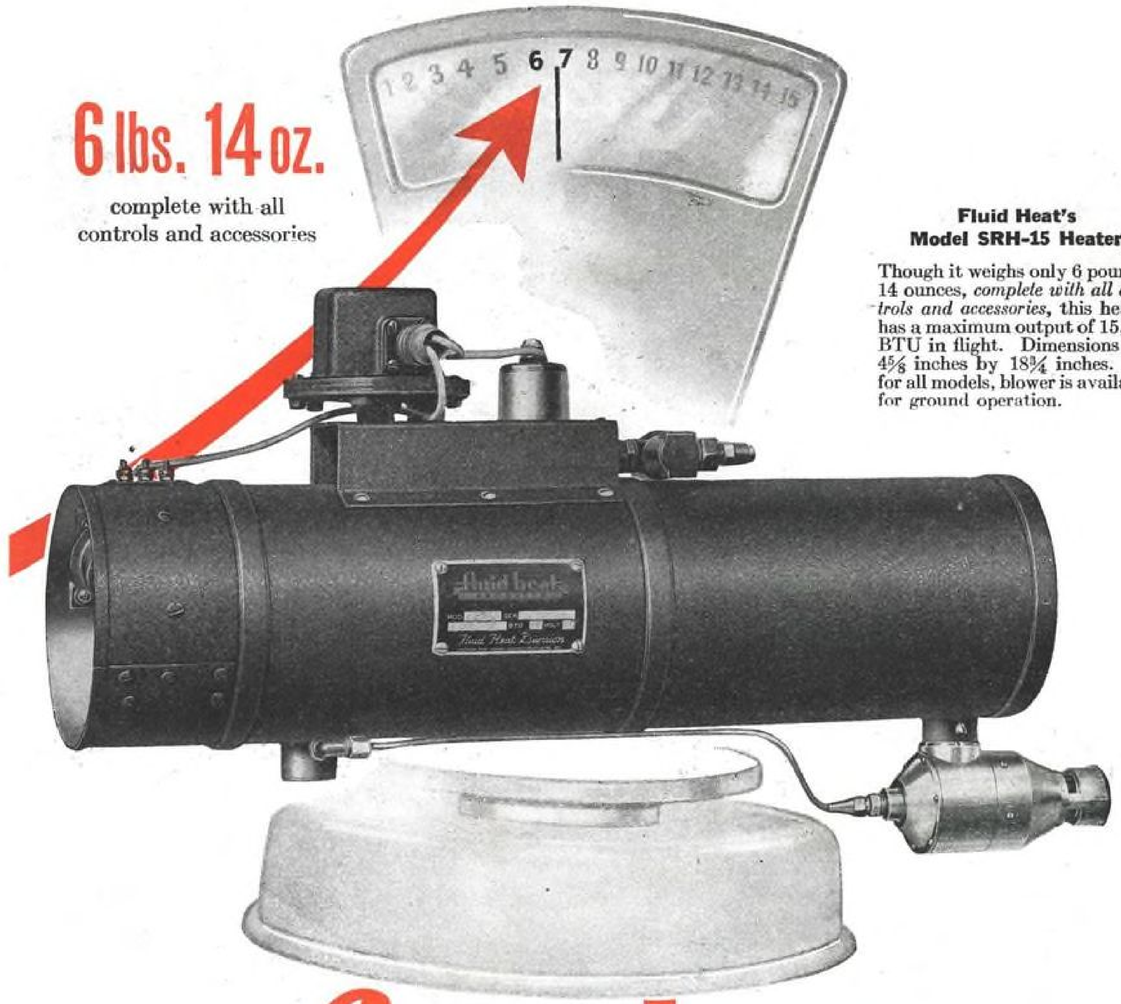


Fluid Heat's Model SRH-15 Heater

Though it weighs only 6 pounds, 14 ounces, *complete with all controls and accessories*, this heater has a maximum output of 15,000 BTU in flight. Dimensions are 4⅝ inches by 18¾ inches. As for all models, blower is available for ground operation.


fluid heat
AIRCRAFT HEATERS

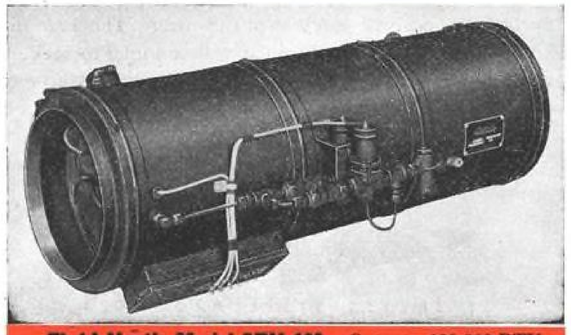

Fluid Heat's Model SRH-100. Output: 100,000 BTU per hour; weight only 24½ pounds. Diameter is 9 inches, length 27 inches. Model SRH-50, identical in design, weighs but 16 pounds, 10 ounces; measures 6½ inches by 20 inches. Blowers available for ground operation, with transfer between flight and ground phase automatic.

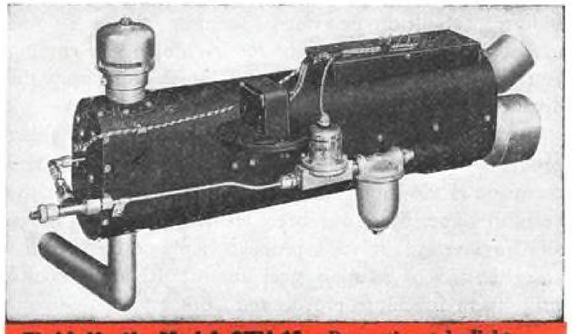

Fluid Heat's Model STH-15. Proportionately lightweight and compact, this model delivers 15,000 BTU per hour. All controls and accessories included, it weighs only 8 pounds. Dimensions are 3 inches by 5 inches by 18 inches. This model of heater is used to defrost windshields and heat fighter-plane cockpits.

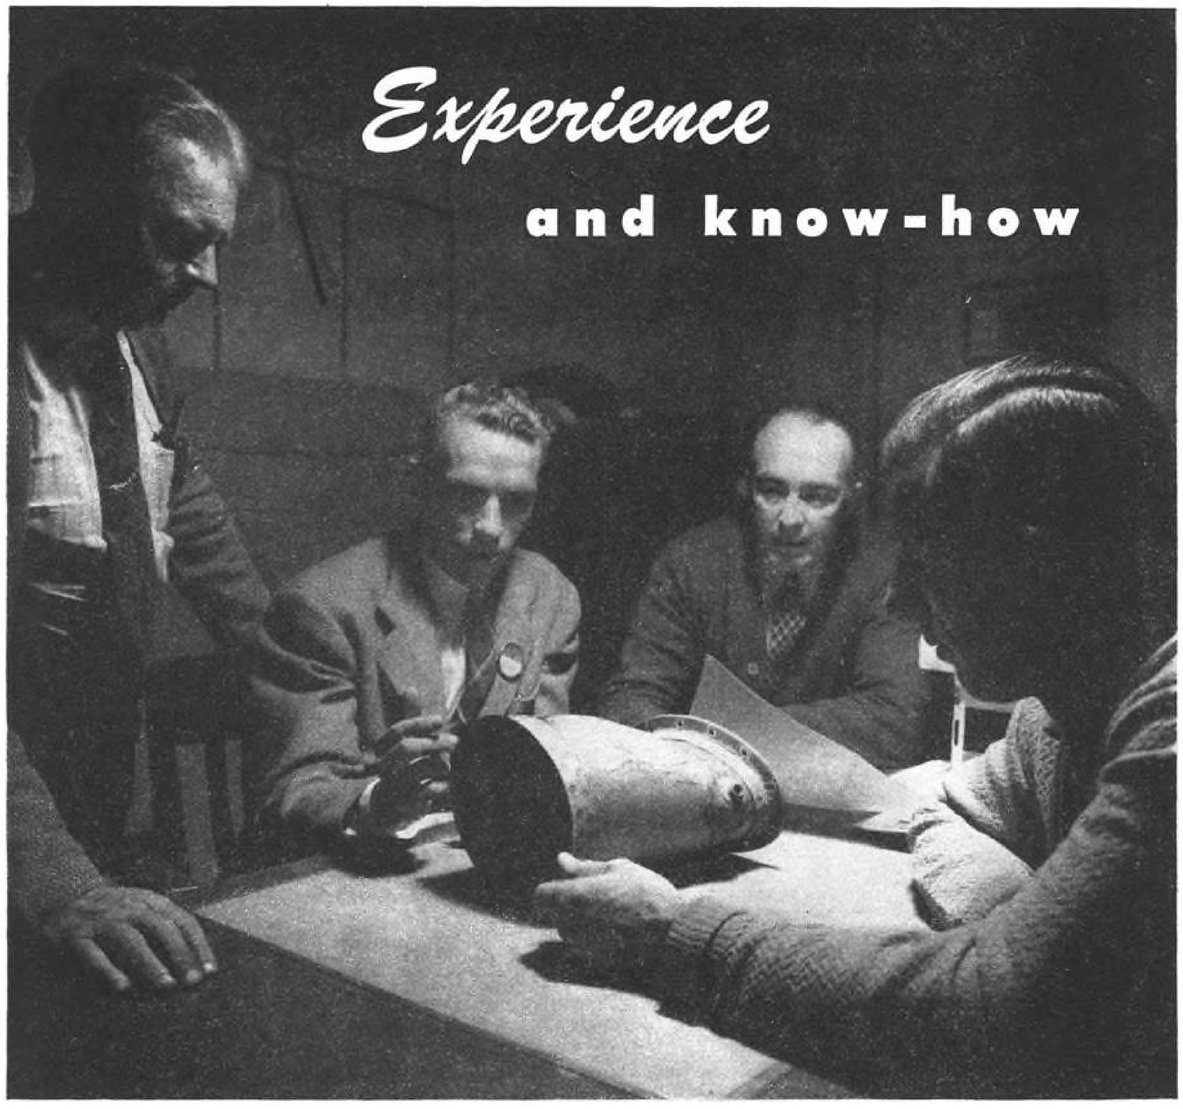

...for TOUGH manufacturing jobs

Solar pioneered the present day airplane exhaust manifold industry... built the first one of stainless steel on a home made drop hammer... fought for its life in the ensuing years... and grew to maturity and leadership during the decade of general business depression before the war.

Leadership in building airplane exhaust systems and other products which must withstand hot gases, acids, heat and corrosion is the course set by Solar for today and for the years to come. Much has been learned about the design and engineering of such products... about the peculiar characteristics of stainless steel and similar alloys which make them difficult to process and fabricate.


Airplane and engine manufacturers are invited to bring to Solar any problems involving the engineering and production of new postwar products of this nature. These are the kind of manufacturing jobs Solar will continue to seek... because they are the tough jobs Solar knows best how to do. Address "Management".

ARMY E NAVY ARMY E NAVY

SOLAR

STAINLESS STEEL PRODUCTS

SOLAR AIRCRAFT COMPANY SAN DIEGO 12, CALIF. DES MOINES 5, IA.

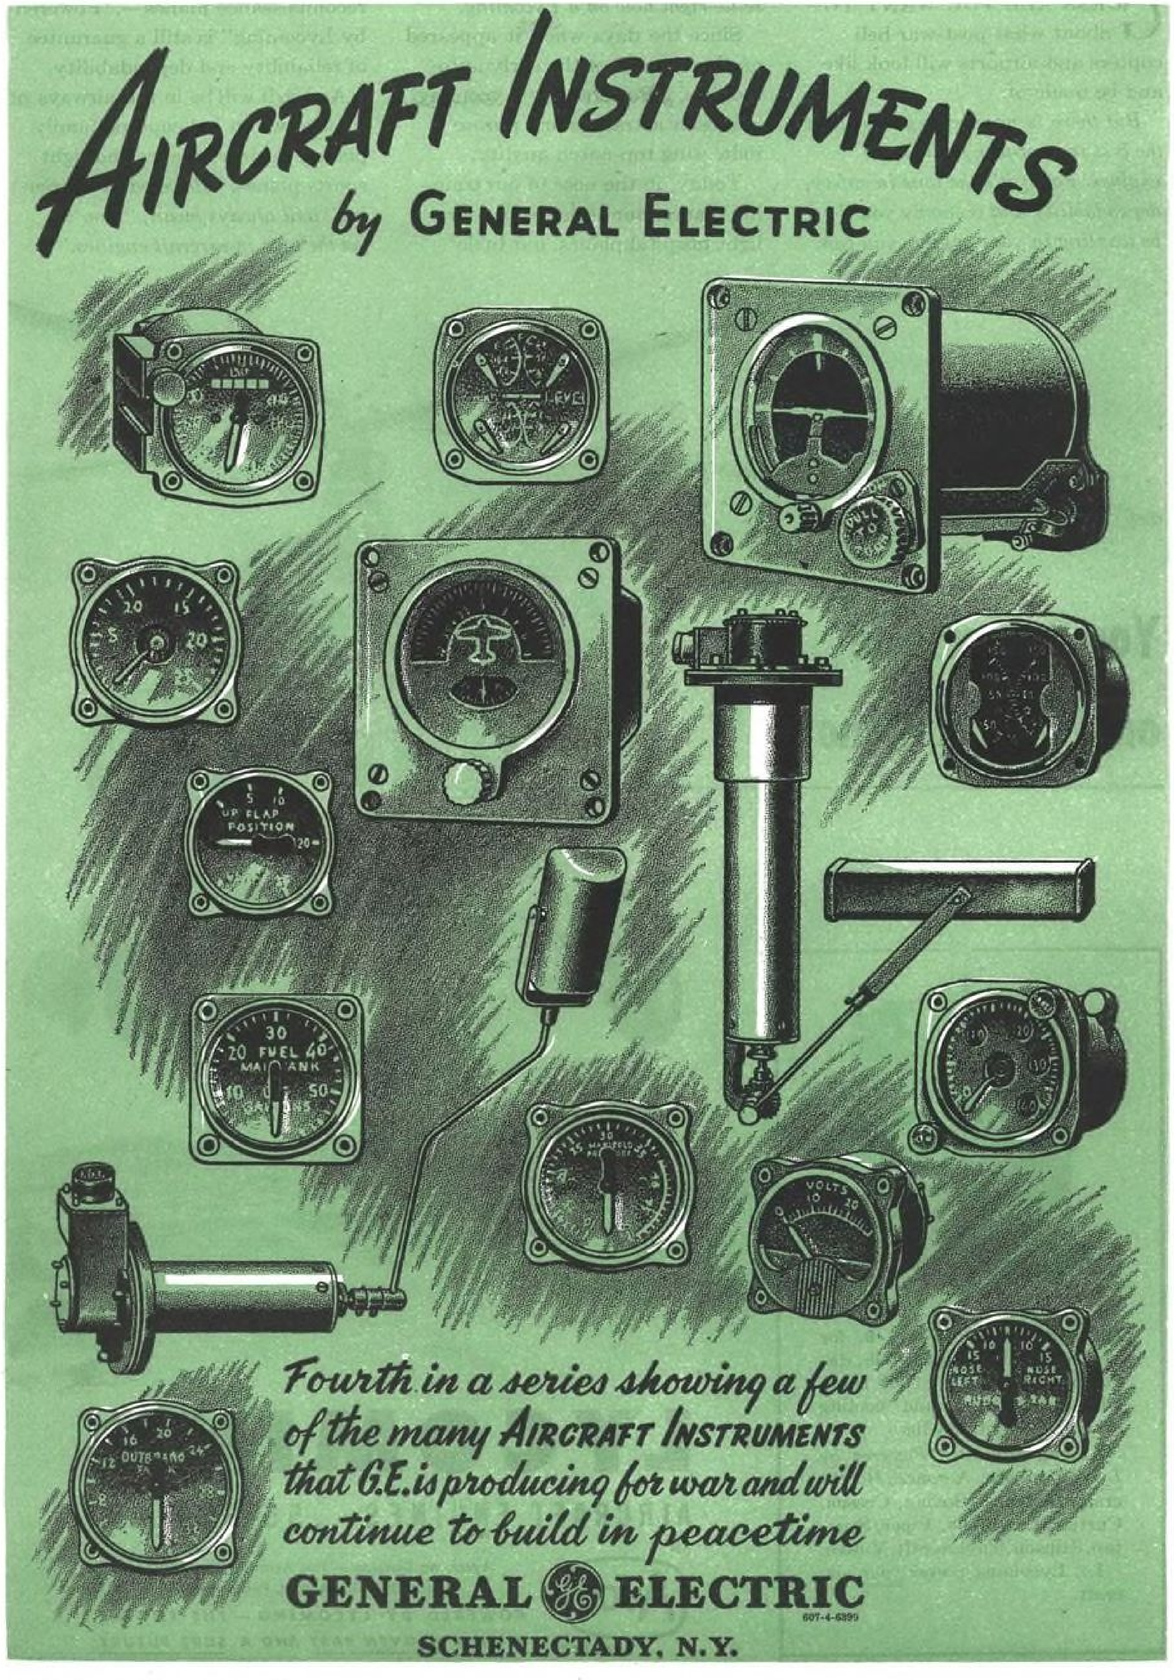

GUESS ALL YOU WANT TO—about what post-war helicopters and airports will look like and be made of.

But there is no need to guess about the best in post-war light-plane engines. For if it's the tops in safety, dependability and economy you'll be wanting in your engine, you can settle right now on a Lycoming.

Since the days when it appeared on the bonnets of the early automobiles, "Powered by Lycoming" has been a trade-mark phrase indicating top-notch quality.

Today, in the nose of our training planes, our aerial jeeps, our light hospital planes, our little reconnaissance planes—"Powered by Lycoming" is still a guarantee of reliability and dependability.

And so it will be in the airways of tomorrow, on helicopters, family planes, business planes and light sports planes. *"Powered by Lycoming" will always mean, "You've got the tops in aircraft engines."*



You can decide on THIS right now.

LYCOMING MODEL O-435-D, for vertical or helicopter use, developing 212 h.p. at 3000 rpm., with cooling fan and cooling system. Weight 433 lbs.

Among aircraft *"Powered by Lycoming"* are: Aeronca, Beechcraft, Bellanca, Boeing, Cessna, Curtiss, Luscombe, Piper, Spartan, Stinson, Taylorcraft, Vultee.

Let Lycoming power *your* aircraft.


LYCOMING

AIRCRAFT ENGINES...55-300 H.P.

AN Avco PRODUCT

Lycoming Division — The Aviation Corporation
Dept. D2, Williamsport, Pennsylvania

POWERED BY LYCOMING — THE ENGINE WITH A PROVEN PAST AND A SURE FUTURE

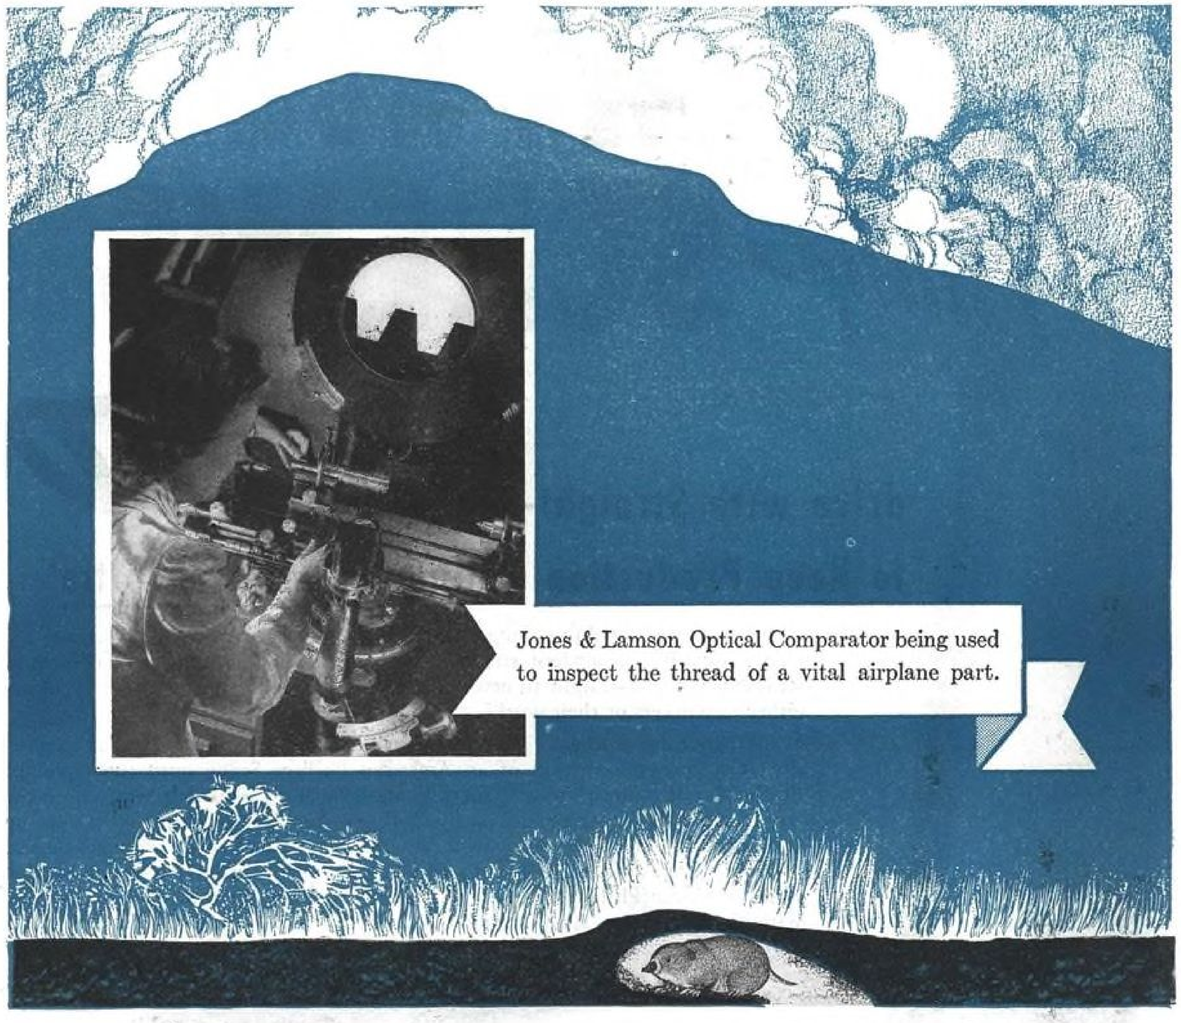

Jones & Lamson Optical Comparator being used to inspect the thread of a vital airplane part.

Making Mountains out of Molehills!

There are people who *must* make mountains out of molehills. They are those who must detect and measure the microscopic irregularities that would, if undiscovered, swell scrap heaps, retard production and even endanger lives.

Jones & Lamson Optical Comparators enlarge minute imperfections to conspicuous size. By the use of the Comparator, inspectors of tools and products can *see* and *measure*, accurately and quickly, faults that might elude other means of inspection.

Jones & Lamson Optical Comparators are made in various models to meet every need. Ask Jones & Lamson inspection engineers how you can use them to expedite and improve inspection in your plant. Ask them today!

JONES & LAMSON
MACHINE COMPANY
Springfield, Vermont, U.S.A.

Manufacturers of: Universal Turret Lathes • Fay Automatic Lathes • Automatic Double-End Milling and Centering Machines • Automatic Thread Grinders • Optical Comparators • Automatic Opening Threading Dies and Chasers.


AMERICAN Phillips SCREWS

drive with Straight-Line SPEED

to Keep Production Rolling at "Full Throttle"

Are you slow-poking along with the same old outdated, slotted screws? . . . Or are you using the modern, streamlined American Phillips Screw Driving method which drives you straight to new speed records in production, without accidents either to workers or their work?

All that *any* worker . . . skilled or unskilled, man or woman . . . has to do is this: Fit the recessed head of an American Phillips Screw onto the 4-winged Phillips bit of a power-driver. Aim this *automatically self-aligned* driving unit at the work, and pull the trigger. *That's all.* Every American Phillips Screw sets up straight, flush, and tight, with its head unburred . . . and with no gouges on surrounding work-surfaces. And that's why so many plants in every industry keep on using American Phillips Screws *right from the first time they tried them* . . . because with this straighter, speedier method, it costs less to do more and better work.

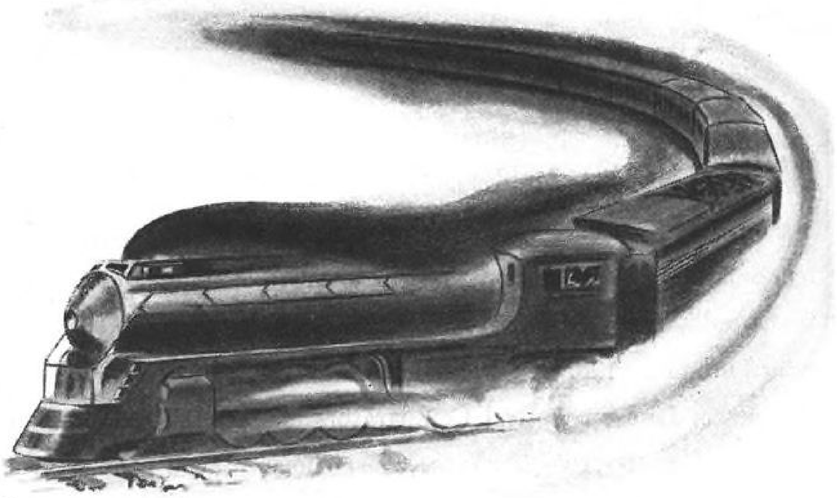

4-WINGED DRIVER CAN'T TWIST OUT OF ENGINEERED TAPERED RECESS IN AMERICAN PHILLIPS SCREW HEAD



AMERICAN SCREW COMPANY

PROVIDENCE 1, RHODE ISLAND

Chicago 11: 589 E. Illinois Street *Detroit 2.* 502 Stephenson Building

Put the Screws on the enemy . . . BUY BONDS!



Air Power on Parade

Pictured are only a few of the many types of planes which make up the might of our Allied Air Forces. They are part of a gigantic parade of plane production which had its beginning in thousands of plants throughout America.

At McDonnell, we're proud of each of these planes—for it has been our privilege to contribute to the production of every one of the famous aircraft pictured here.

Parts and assemblies including: horizontal stabilizers, vertical fins, rudders, elevators, anti-drag ring cowls, anchor davits, ammunition racks, bomb door links, auxiliary oil tanks, loading gear parts, observer's sliding seats, flexible gun mounts, plastic parts for powered gun turrets, ammunition boxes, and in the case of the AT-21, the complete airplane—*all these* represent McDonnell's part in the production of these well-known aircraft.

Currently we're busy on other projects equally important—including the production of aircraft of our own design and manufacture. When details can be released—we'll look forward to telling you the full story of these activities, too.


Yes, each of us at McDonnell has a personal interest in every one of these planes. We're mighty proud that we had a part in helping to make possible their splendid contributions to air power—and victory.

1. *Douglas C-54*
2. *Douglas C-47*
3. *Consolidated B-24*
4. *Consolidated PB2Y-3*
5. *Douglas A-20*
6. *Fairchild AT-21*
7. *Censored*
8. *Curtiss A-25*

McDONNELL *Aircraft Corporation*

Manufacturers of PLANES · PARTS · PLASTICS ★ SAINT LOUIS-MEMPHIS ★

Knowledge of Metals that will improve Peacetime Aircraft

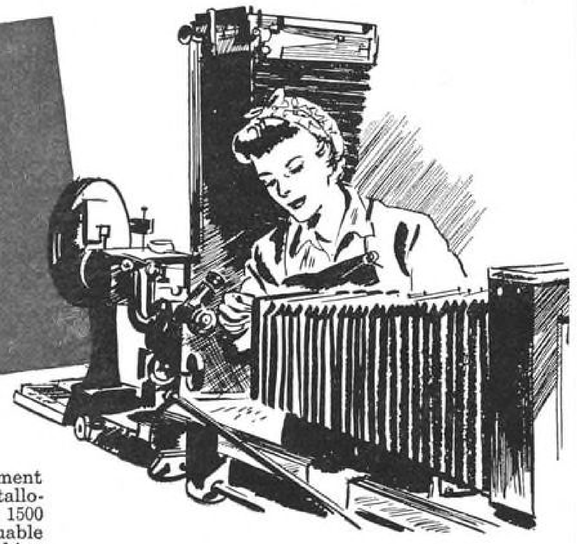

Inside the metallurgical lab at AiResearch this instrument ferrets out the innermost secrets of metal. The Metalloscope magnifies and records photographically up to 1500 diameters... discloses minute flaws. It has been invaluable in wartime . . . it will play an important role in making peacetime flight safer.



New ways to plate metal are constantly being sought—and found—in the AiResearch metallurgical lab. Here a newly-developed plating method for vital B-29 cabin pressurizing equipment is tested... one of the many experiments that has helped improve high altitude products sent to war.



Chemistry, too, plays its part by analyzing processing methods, finding new materials, new plastics, new finishes and developing ways of guarding against corrosion. By discovering new means to withstand the stresses of high speed flight, AiResearch will contribute to the safety of aviation in peacetime years.

In peace as in war, this metallurgical laboratory of AiResearch will continue to seek better materials—better methods for airplane construction ...so that flying will be safer, swifter, pleasanter. AiResearch Manufacturing Company, Los Angeles and Phoenix.

"Where Controlled Air Does The Job"—Automatic Exit Flap Control Systems • Temperature Control Systems • Supercharger Aftercooling Systems Engine Air Intercooling Systems • Cabin Pressure Regulating Systems • Engine Oil Cooling Systems


AiResearch
DIVISION OF
THE GARRETT CORPORATION

Federal BALL BEARINGS

CAREFULLY MANUFACTURED
PERFECTLY FINISHED
TOUGH • STRONG
DURABLE






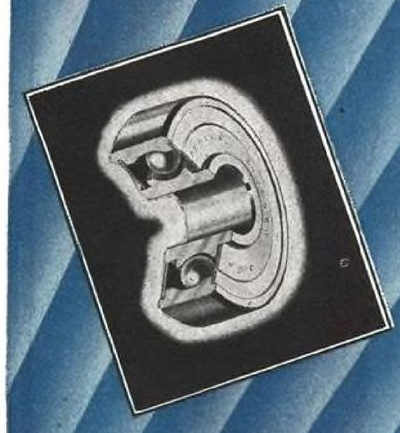

THE FEDERAL BEARINGS CO., INC.
Makers of Fine Ball Bearings
POUGHKEEPSIE, N. Y.
REPRESENTATIVES LOCATED AT
Detroit: 2640 Book Tower—26 • Cleveland: 402 Swetland Building—15
Chicago: 902 S. Wabash Ave.—5 • Los Angeles: 5410 Wilshire Blvd.—36

They mold them BIGGER and BIGGER with LUMARITH*

A Celanese Plastic*

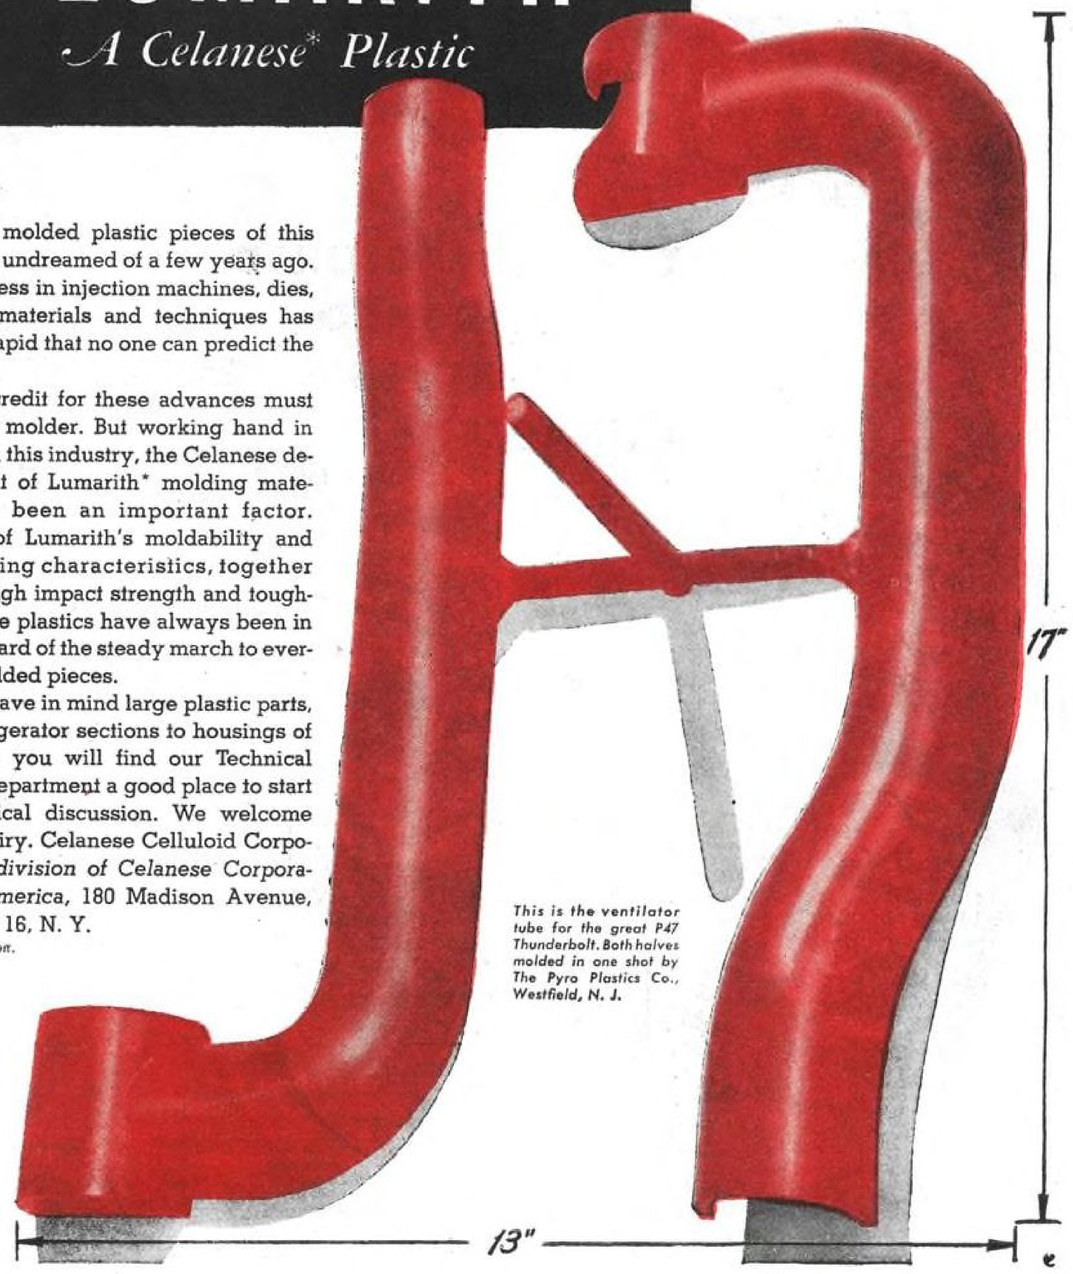

This is the ventilator tube for the great P47 Thunderbolt. Both halves molded in one shot by The Pyro Plastics Co., Westfield, N. J.

Injection molded plastic pieces of this size were undreamed of a few years ago. But progress in injection machines, dies, molding materials and techniques has been so rapid that no one can predict the limit.

Much credit for these advances must go to the molder. But working hand in hand with this industry, the Celanese development of Lumarith* molding materials has been an important factor. Because of Lumarith's moldability and free-flowing characteristics, together with its high impact strength and toughness, these plastics have always been in the vanguard of the steady march to ever-larger molded pieces.

If you have in mind large plastic parts, from refrigerator sections to housings of any type, you will find our Technical Service Department a good place to start the practical discussion. We welcome your inquiry. Celanese Celluloid Corporation, *a division of Celanese Corporation of America*, 180 Madison Avenue, New York 16, N. Y.

*Reg. U. S. Pat. Off.

Which one are you?



Each of these men has a different lighting problem. Read how G-E lamps are helping him to solve it.



FACTORY MANAGER: "We've got to keep production rolling at top speed, on precision work as well as simple assembly jobs. With good lighting... from G-E Mazda lamps... eyes see quicker and hands move faster. That helps keep us right on schedule."

PURCHASING AGENT: "No time to take chances these days. To get the right lamps for the right job—every time—we go right to G-E. It pays big time-saving dividends and today that's more important than ever."



PRODUCT DESIGNER: "If you're stuck for new ways to add sales appeal . . . as we were . . . then consider all the possible uses for G-E Mazda Lamps as quick visual indicators. They may be the solution to help you make your products better, more dependable and easier to sell."



MAINTENANCE MAN: "No wonder we've cut down on maintenance time! General Electric lamps are just as near as the telephone. When we need lamps quick . . . in an emergency . . . G-E gets them here in a hurry."


PLANNING a postwar program? Want all the benefits of faster, easier seeing with soft, cool G-E fluorescent lighting? Or do you need special G-E lamps that will help do tough jobs better?

Then remember these two important facts:

1. Get the *right* lamp. Your G-E lamp supplier will be glad to help ... and he knows how to serve your needs best.

2. Be sure you specify G-E Mazda lamps. They give all the economy and efficiency developed by over 50 years of G-E leadership in lamp research. They're made to "stay brighter longer."

"TO MAKE G-E LAMPS STAY BRIGHTER LONGER"
The Constant Aim of G-E LAMP RESEARCH

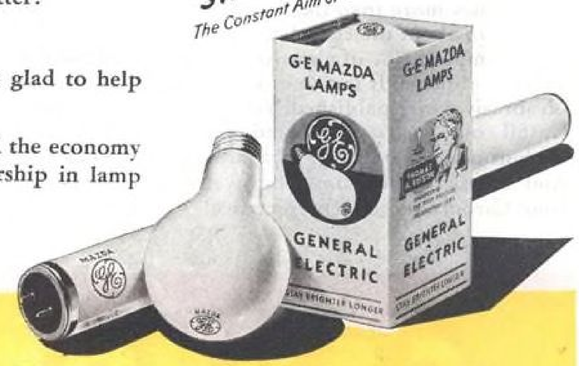


G-E MAZDA LAMPS

GENERAL ELECTRIC

KEEP BUYING WAR BONDS...
KEEP THE WAR BONDS YOU BUY

Hear the G-E radio programs: "The All-Girl Orchestra," Sun. 10 p.m. EWT, NBC; "The World Today" news every weekday, 6:45 p.m. EWT, CBS.

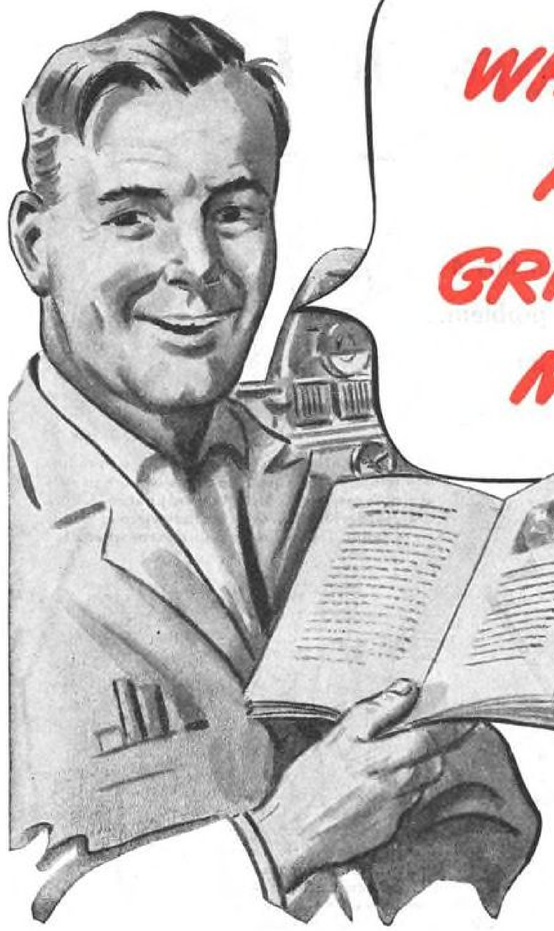

WHAT'S ALL THIS ABOUT NEW GRINDING WHEEL MARKINGS!

THAT'S right—from now on it's going to be a lot easier to get the right grinding wheel for the job! Carborundum, along with all other makers of grinding wheels, has adopted a new system of wheel markings. ✳ The new system is one of marking only. So wheels with similar markings by different makers may not grind alike.

This new book gives you a clear understanding of the new markings on Wheels by Carborundum and the grades they indicate. It's also full of information on the proper selection, identification, specification, use and care of grinding wheels.

But it does more than that! It includes additional information about the complete Carborundum line, the most complete line of abrasives made and sold under one brand name. It is one of the most useful manuals on abrasives ever published! To get your copy promptly, fill out the coupon and mail today to The Carborundum Company, Niagara Falls, New York. And for help with *any* abrasive problem, consult your Carborundum Representative!


✳ *Effective soon, these new markings will appear on all Grinding Wheels sold by Carborundum. Because so many of these wheels are in use in industry, it may take a little while before the transition is complete. For as long as is necessary to help our customers, Grinding Wheels by Carborundum will carry both the old and new markings.*

YOU NEED THIS BOOK TO SELECT THE RIGHT GRINDING WHEEL FOR THE JOB!

THERE IS A
CARBORUNDUM
TRADE MARK
PRODUCT FOR EVERY ABRASIVE APPLICATION

IT'S ALL IN THIS NEW BOOK BY CARBORUNDUM!



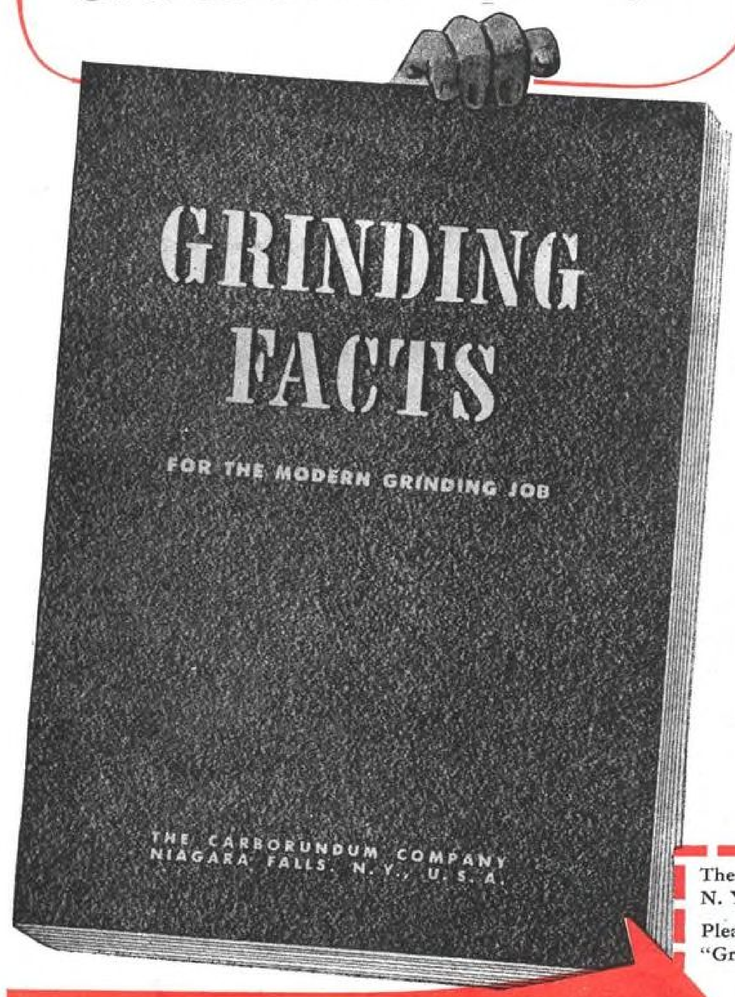

HIGHLIGHTS FROM "GRINDING FACTS"

1. The fundamentals of Wheel Marking
2. The new Carborundum Wheel Markings
3. Factors to consider when selecting a Wheel
4. Care and Handling of Grinding Wheels
5. The 9 Standard Wheel Shapes
6. Basic Grinding Wheel Functions
7. Types of Grinding Operations
8. Diamond Wheels
9. Green Grit Wheels
10. Mounted Wheels
11. Thread Grinding Wheels
12. Cutting-Off Wheels
13. "MX" Wheels
14. Tool Room Sticks
15. Coated Abrasives
16. New Gradings
17. Wheel Speeds

MAIL COUPON TODAY FOR YOUR FREE COPY!

The Carborundum Company, Niagara Falls, N. Y., Dept. A.

Please send me my free personal copy of "Grinding Facts."


Name.....

Firm.....Title.....

Address.....

(Carborundum is a registered trade mark of and indicates manufacture by The Carborundum Company)

To the Airlines of the World




To the operators of commercial aviation equipment throughout the world Titeflex makes a peacetime pledge — a pledge for continued research and development in solving your particular problems of electrical shielding of ignition and supplementary electrical wiring. We further pledge increased service — both sales and engineering — to our commercial air line customers — for the time and energy of our personnel will not then be so entirely devoted to the needs of the Army and Navy Air Forces.

The Commercial airplane of peace will be equipped with many new and sensitive electronic devices. These — together with higher frequency radio communication and locating equipment — will demand absolutely efficient shielding of ignition and auxiliary electrical wiring. Wartime research by Titeflex has developed the Unimold Ignition Lead and Aerocon Conduit to promote this efficiency in shielding. They are now and will be in peace, available to the air line operator.

You are the future of Aviation. Your task in wartime has been prodigious, since you have had so much to do, and so little new equipment with which to do it. With new equipment—with an air-minded postwar public, your future horizons should be limitless. While we have tried to provide specialized service to you—even during the war—when Peace comes, our engineers will go still further in individualized research to solve your specialized problems.

ELBERT E. HUSTED, *President*

TITEFLEX, INC., 510 Frelinghuysen Ave., Newark 5, N. J.

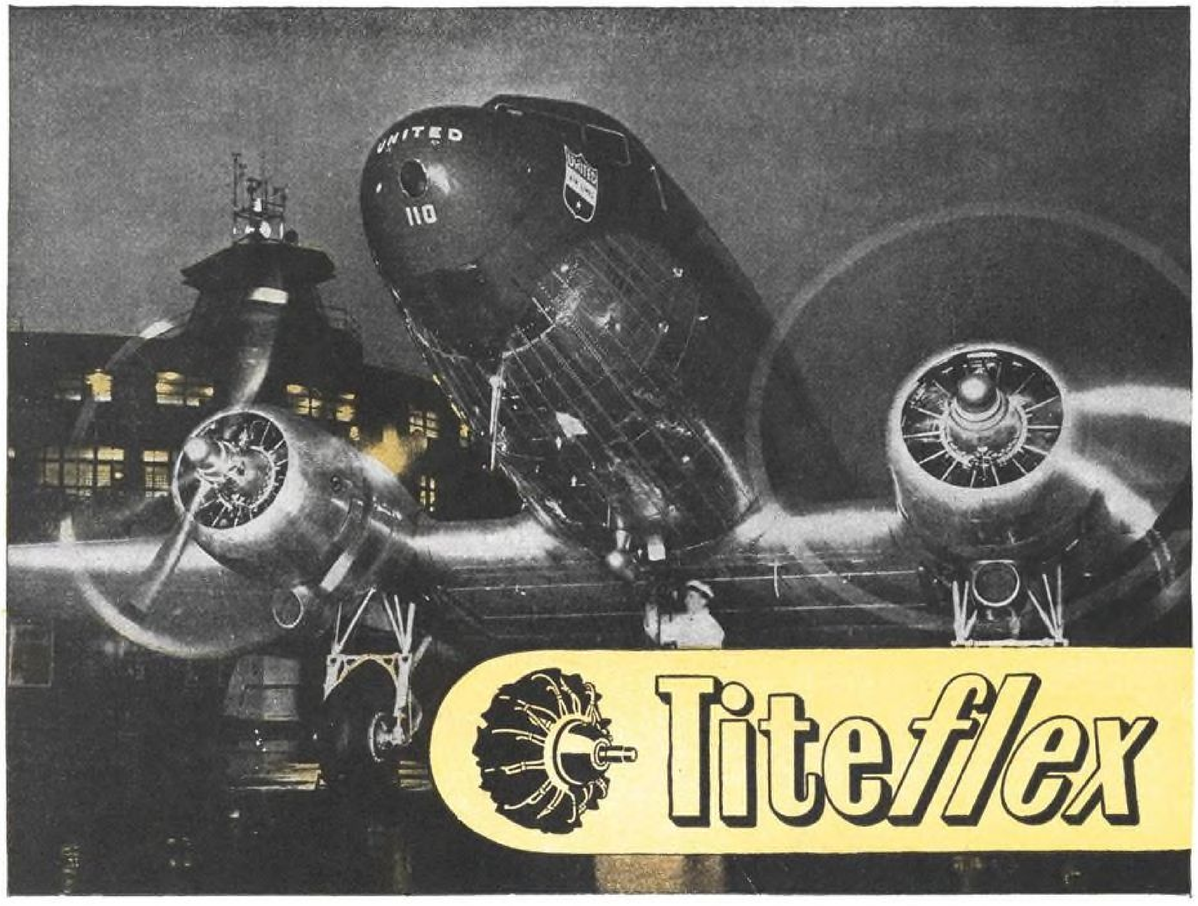




"Aero-Seal" STAINLESS STEEL WORM-DRIVE HOSE CLAMPS

NEXT month, December, we expect to start production deliveries of our new Stainless Steel AERO-SEAL Hose Clamps. At first, these will be available only in the most popular sizes —M12, M16, M20. We suggest prompt placement of orders to assure earliest possible deliveries . . . The new Stainless Steel AERO-SEAL Clamp has the obvious advantage of being made of rust-resistant material throughout. In addition, it has inherently greater strength than a clamp made of carbon steel, and we have also made some further design improvements which we will discuss in an advertisement next month. Remember — *we originated* the AERO-SEAL Worm-Drive design and thus offer you the background of longest experience with this new and better type of clamp. Your inquiries are invited and will be answered promptly.

AIRCRAFT STANDARD PARTS CO.

1715 NINETEENTH AVE., ROCKFORD, ILLINOIS

USE THIS FILTER...



(ADEL AN 6101-1)


WITH THIS PUMP



(ADEL AN 6100-1)

● **ADEL'S New Micronic Midget Filter (AN 6101-1)** is recommended for installation along with every ADEL Series "K" Fluid Metering Pump. This improved filter weighs only 4.8 oz., measures only 2" x 2" x 4", yet has a filtering area of 36 square inches. Will remove particles as small as 5 microns, thus affording complete protection for the anti-icing system.

● Schematic drawing shows typical installation of propeller anti-icing system AN 6100-3 including ADEL Series "K" Fluid Metering Pump (AN 6100-1), ADEL Filter (AN 6101-1) and Rheostat (AN 3155-50-30). While individual units are sold separately for replacement purposes, it is suggested that purchasers of new equipment select the complete kit for utmost satisfaction. Also widely used for anti-icing protection of carburetors, windshields, radio masts and pitot tubes. Pumps many light industrial fluids. Veteran of 7 years global service under every conceivable condition. Over 100,000 now in use. Write today for descriptive brochure.

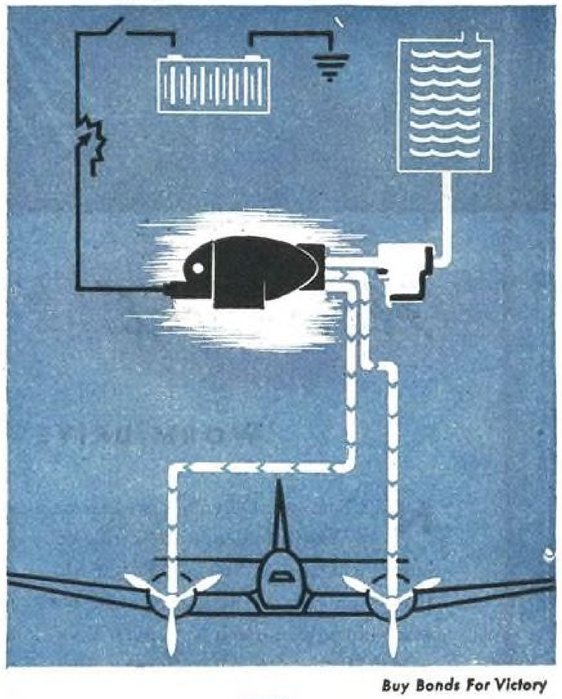

NEW ADEL EDUCATIONAL SOUND AND COLOR FILMS

● In two parts, each 10 minutes. No. 1, Basic Hydraulics. No. 2, Fluid Flow in Hydraulic Systems. Full color cartoons. Arrange bookings with our Burbank, Calif. Engineering Service Department.

Buy Bonds For Victory

ADEL

ADEL PRECISION PRODUCTS CORP.

BURBANK, CALIFORNIA • HUNTINGTON 17, WEST VIRGINIA

Offices: 1141 Fourth Avenue Building, Seattle 1, Washington; 421 Mutual Home Building, Dayton 2, Ohio; 802 Fisher Building, Detroit 2, Michigan; 303 Wareham Building, Hagerstown, Maryland; 914 Lexington Building, Baltimore 1, Maryland; 630 5th Avenue, Rockefeller Center, New York 20, New York. *In Canada:* Railway & Power Engineering Corporation, Ltd.

After VICTORY... *the* ADEL-AGE



When a short flash of light means the difference between mission completed and utter destruction, E. A. meets the test. For the lives of the crew and the safety of the ship depend on whether the correct succession of flashes answers the challenge. Friend or foe! Godspeed or hot lead! It's such accuracy of manufacture that is responsible for E. A. Laboratories' leadership in the many industries it serves.



E. A. LABORATORIES, INC., BROOKLYN, N. Y.

MAKERS OF AUTOMOTIVE, AVIATION, BICYCLE AND MARINE APPLIANCES


10 vital years
Doing ONE
In 10 short years, the name Superior has become the synonym for quality small metal tubing.
The reasons for such recogniton are numerous; probably the most important of which is the fact that we have not changed objective since our founding day in November 1934 — to produce only fine small tubing from ⅜" OD down in any metal that can be cold drawn.
And what difference does our intensive specialization make to you and your present or future products in which tubing is or will be used?
We believe it makes a great deal of difference.
In the first place, the Superior Tube Company engineering and research departments have the facts about small tubing applica-
SUPERIOR
NORRISTOWN,
Job WELL
tions at their fingertips — whether the use be for anode and cathode sleeves, mechanical tubing, aircraft types, instruments, hypodermic needles, or for a newly designed electrical appliance part.
Secondly, Superior offers the design and developmental engineer an opportunity to discuss projected requirements in terms of seamless and welded tubing produced in the mill where so-called "specialty tubing" is an every-day production item.
And finally, for the new tubing of tomorrow . . . the tubing yet to be developed . . . Superior is your logical starting point . . . . by tradition and by experience.
We've achieved in 10 years what at some periods in American industry has taken 45 years to accomplish.
TUBE CO
PENNSYLVANIA
ARMY E NAVY
SUPERIOR
TOP LINE
SMALL TUBING



Westinghouse . . . a working partner of the aviation industry . . .

SINCE PLANES BEGAN TO TALK


The first planes in World War I were good—but dumb. They had no voice. If the pilot wanted to tell the artillery where to aim he had to drop a monkey wrench over the side with a note tied to it.

Then planes began to talk; the first crude aircraft radios were introduced, and Westinghouse electrical units were installed to supply the power. During 1917 and 1918, Westinghouse built thousands of these wind-driven, high-frequency alternators for aircraft.


Increased plane speeds soon made the wind drag of these early units excessive, so Westinghouse developed a main engine-driven generator. Power requirements of planes grow steadily as time went on and battery charging was added to the load. Generator ratings increased, too.



The first Westinghouse wind-driven alternators (1917) for aircraft operated with fixed-pitch propellers.

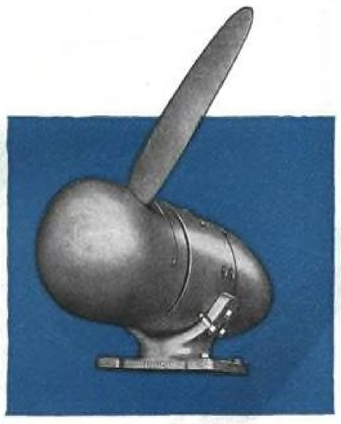

This Westinghouse wind-driven generator (1927) had adjustable-pitch, speed-regulating, single-blade propeller.



This 440-cycle Westinghouse machine (1930) was the first successful main-engine driven alternator.



For the rigid airships "Los Angeles", "Akron", and "Macon" Westinghouse built motor-generator sets to supply radio power.

In 1930, Westinghouse designed some of the first generators for use with small auxiliary engine drives.

About this time the Army and Navy began to look to auxiliary engine-driven power plants for heavy bombers and large patrol craft. To meet this need, Westinghouse developed a 5 kw generator. Some of these units are still on active service.

Today, Westinghouse is building a wide range of top-quality, electrical power and control equipment for airplanes.

The Type P-1 generator, for example, (shown below) has turned in the best record yet established for this type of equipment.


Design and development work continues. Take one case: among the most important results of Westinghouse research is the new brush process which solves the problem of rapid brush wear at high altitudes.

Project this 27-year record of research and established performance into the future. It constitutes a sound reason for making Westinghouse your working partner in aviation progress. Westinghouse Electric & Manufacturing Company, Small Motor Division, P. O. Box 868, Pittsburgh 30, Pa. J-03209

Westinghouse

PLANTS IN 25 CITIES OFFICES EVERYWHERE


for 27 years the electrical partner of the aviation industry

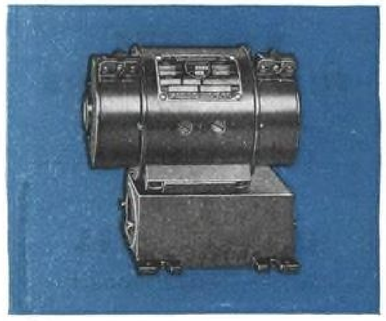

Westinghouse first introduced this minimum ripple dynamotor for radio communication use (1931).




Note the trend towards modern streamlined compactness in this later Westinghouse dynamotor (1934).

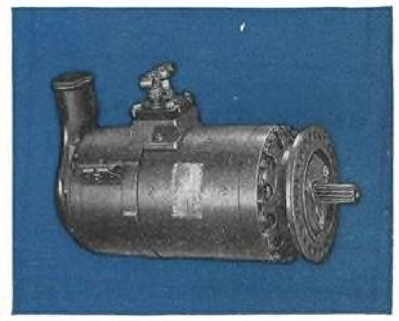

This modern Westinghouse 28.5-volt d-c generator (type P-1) helps power the great bomber fleets of today.



Make sure you know the difference in cutting oils!

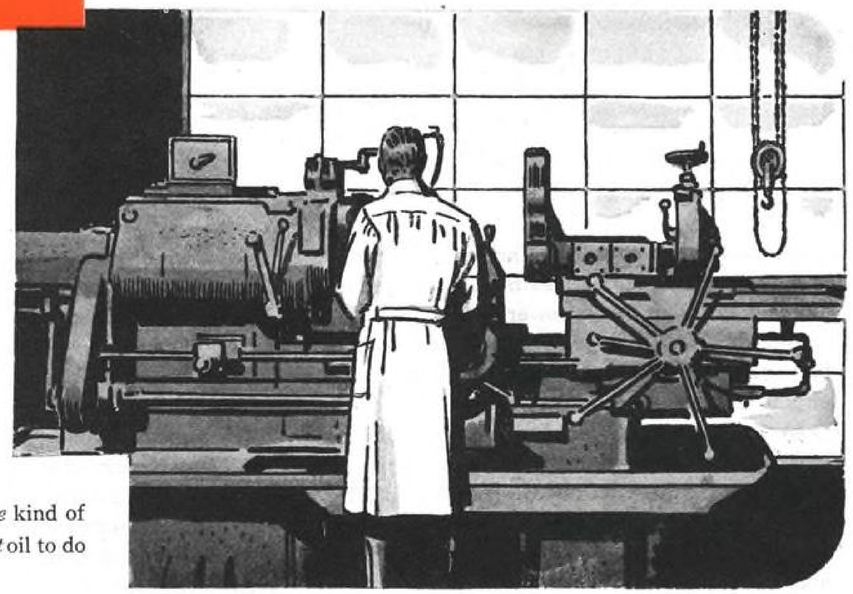

Any cutting oil will do *some* kind of a job, but it takes the *correct* oil to do the best work.

For example, highly sulphurized cutting oils will improve the quality of work on certain ferrous metals and allow faster cutting. But such oils are not desirable for use on copper alloys due to the highly corrosive action of sulphur on copper. Drilling ordinary steel requires a different cutting fluid than does the same operation on stainless steel, if you are to get the best production.

It is cheaper to use the *correct* cutting oil on a piece of work because better surface finish, faster operation, fewer tool changes and fewer rejects are the results.

Union Oil Company manufactures a complete line of cutting fluids. Each of them is a carefully developed formulation based upon extensive research, investigation and practical experience in the machining industry.

Remember! Selection of the *right* cutting oil is important. Take advantage of the aid it can give you!

It may be that you have some operations in your shop on which expenses may be reduced and production increased by changing to a different cutting oil than the one you are now using. A phone call to your local Union Oil Company representative will place the assistance of Union Oil engineers at your service, or write Union Oil Company, 617 West 7th St., Los Angeles 14, California.

FREE! CUTTING OIL CALCULATOR!

Tell at a glance the correct cutting oil for every type of metal and cutting operation. Avoids errors – saves time.

Decimal equivalent scale – accurate to six places – on reverse side for ready reference.

Handsome, durable plastic. Fits any coat or shirt pocket. For your free calculator, just mail the coupon to:

UNION OIL COMPANY
ROOM 1213
617 W. SEVENTH STREET
LOS ANGELES 14, CALIF.

Name_____

Business Address_____

RED LINE CUTTING FLUIDS

Another
UNION OIL
Success-Tested Product



"BLUE BRUTES," Worthington calls them. They're the line of rock drills, paving breakers, other construction air tools and portable air compressors. The work they do is as tough and shattering as any found in industry.

Fastening such equipment is no job for ordinary nuts. They couldn't last. But Elastic Stop Nuts are O.K. They stay put, come what may in the line of socks and vibration. That's why "Blue Brutes" are fastened with them.


The reason Elastic Stop Nuts hang on like this is found in the elastic collar in their tops. This collar wraps itself around the bolt — squeezes in between the threads — presses up, down and all around. The nut can't turn — can't wiggle.

There's no need for locking pins or washers with Elastic Stop Nuts. And they can be taken off and reused without losing their locking ability.

There are countless products that will be safer and last longer—machinery that will need less servicing — when fastened with these nuts. Perhaps you have some such problem now. If so, let us know. Our engineers will gladly share their experience with you and recommend the correct Elastic Stop Nut.

Note: ESNA nuts are also used on Worthington centrifugal pumps.

Sinews for Worthington "Blue Brutes"

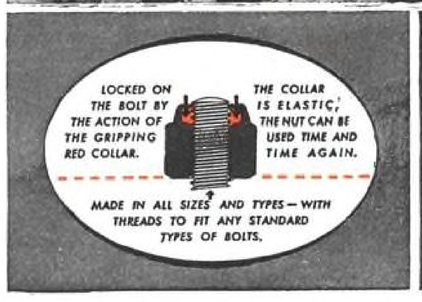



TAKE IT FROM THE MAN WHO KNOWS

In the past, one of our most serious difficulties was the loosening of the nut fastenings on our rock drills, paving breakers, and other compressed air operated construction tools. Some of these tools operate at high piston speeds with resultant vibratory stress on the rods and nuts that hold the component parts together.

Our present use of ESNA Elastic Stop Nuts for the major fastenings on this equipment is the result of exhaustive tests of many types of fasteners. It was found that these nuts hold tight under extremely severe conditions of service and that they retain their satisfactory locking effectiveness even after long periods of operation in the field.

Engineer in Charge Contractors' Air Tools and Rock Drills Worthington Pump and Machinery Corporation

ESNA

TRADE MARK OF
ELASTIC STOP NUT CORPORATION OF AMERICA

ELASTIC STOP NUTS
Lock fast to make things last
UNION, NEW JERSEY, AND LINCOLN, NEBRASKA

MASS PRODUCTION ACHIEVED WITH CO-ORDINATED MATERIALS HANDLING EFFICIENCY

REPUBLIC AVIATION

Automatic TRADE MARK INDUSTRIAL TRUCKS ELECTRIC PROPELLED



Group of Thunderbolt Fighters off final assembly line ready for delivery to Army Air Force.

The large fleet of "AUTOMATIC" TRANSPORTERS · · FORK TRUCKS · · LOW LIFT TRUCKS play an important part in the delivery of THUNDERBOLT FIGHTER-BOMBERS on time to the Army Air Force for final victory

Republic Aviation Corp., Indiana Division, achieves mass production record and on time delivery of Thunderbolt Fighter Bombers only 25 months after final ground was broken. A record in itself. Here every modern material handling technique was utilized by using battery powered mechanical handling equipment for high efficiency handling in the receiving, storage, and distribution of thousands of parts and assemblies to mass production lines at clockwork speed.

AUTOMATIC is proud of the fact that its large fleet of modern handling equipment helped to achieve this splendid record. A complete case history covering these handling operations will be sent on letterhead request. ***Write today.***



Receiving, handling, and stacking of engines, propellers, machine gun parts and press work are efficiently performed by fleet of "Automatic" Fork Trucks.



Incoming supplies, requiring short hauls are easily and quickly handled by large fleet of "Automatic" motorized hand lift "Transporters."



A fleet of "Automatic" low lift trucks handles skid loads of incoming supplies, wings on special racks, and many other materials to stores and process as required.

MANUFACTURERS FOR OVER THIRTY FIVE YEARS *Electric Propelled* **INDUSTRIAL TRUCKS**

AUTOMATIC TRANSPORTATION CO.

DIV. OF THE YALE & TOWNE MFG. CO.

63 WEST 87th STREET — CHICAGO 20, ILLINOIS

Proof . . . IS IN PERFORMANCE

For smooth engine performance . . . economy of flight operation . . . more flying hours per plug . . . for *the finest in spark plugs* . . . specify BG, standard equipment on major airlines.

Extra millions of trouble free, economical airlane miles testify to the uncompromising quality of BG Spark Plugs.

The proof is in performance!



BG


ARMY E NAVY

THE BG CORPORATION

136 WEST 52ND STREET, NEW YORK 19, N. Y.

Manufacturers of both mica-insulated and ceramic-insulated aviation spark plugs

Contractors to the United States Army, Navy and Coast Guard and Aircraft Engine Builders

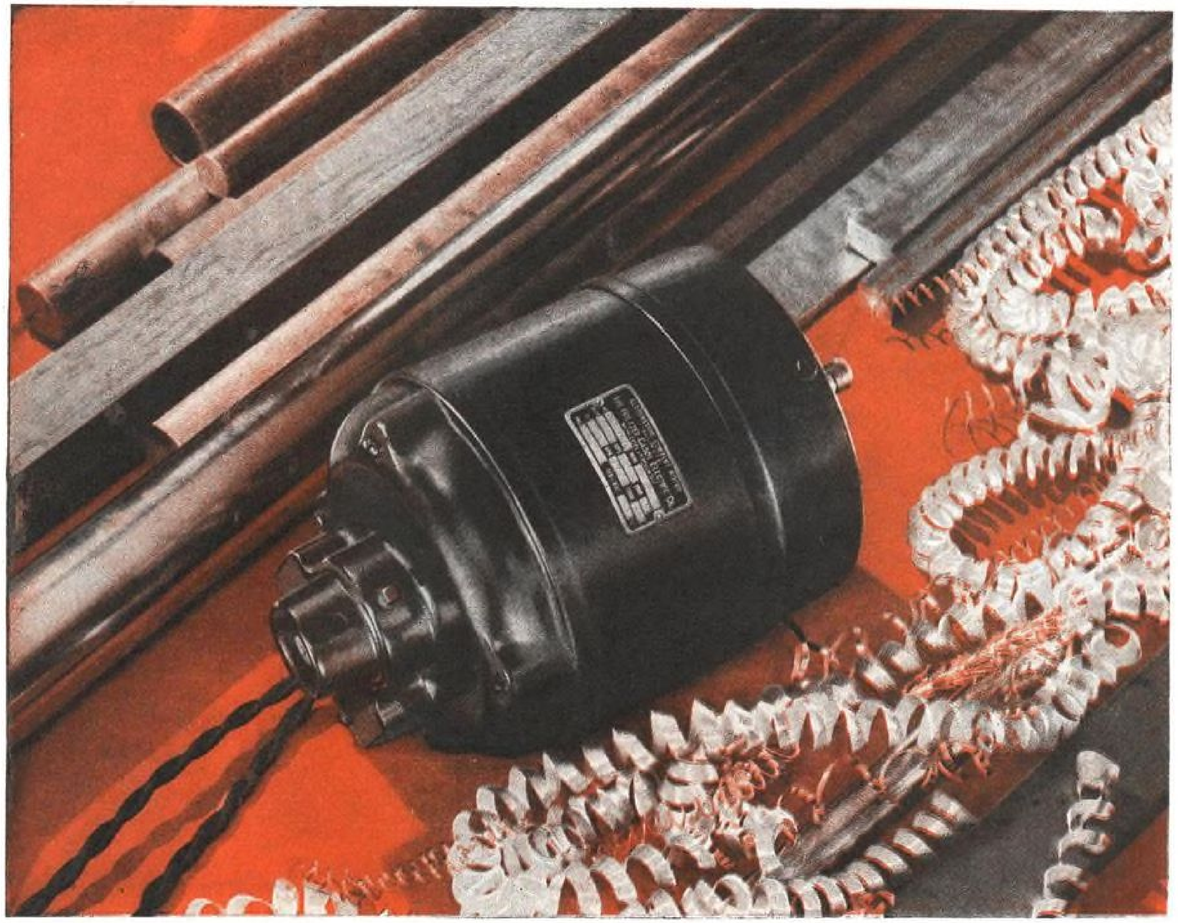

Meet Design and Performance Requirements in Machine Tools



The motor requirements for the precision machine tool, illustrated at the right, called for motors that met certain performance characteristics and special mechanical requirements.

Holtzer-Cabot motor development engineers solved the problem by designing a special motor that exactly met all the operating and design conditions . . . and today these machine tools are operating at peak efficiency because of the dependability of the motors.

Whether you build machine tools or cash registers, it will pay you to investigate Holtzer-Cabot special fractional HP motors.

Our engineers will gladly cooperate with you on your motor problems for post-war products. There is no obligation.

SPECIAL MOTORS DESIGNED TO FIT THE APPLICATION

HOLTZER-CABOT

Division of First Industrial Corporation

Designers and Builders of Special Fractional HP Motors and Electrical Apparatus

125 AMORY STREET, BOSTON 19, MASSACHUSETTS • CHICAGO, ILLINOIS • NEW YORK, NEW YORK • PHILADELPHIA, PENNSYLVANIA

Will VELON* seating last forever?

Thousands of bus, train, plane, taxicab, subway and trolley car seats in active use today are upholstered in *Velon*.

True, none of these installations are much more than three years old. But these have been wartime years—probably the toughest in the history of transportation in America.

Yet not one of those *Velon* seats has needed to be recovered, or has shown the slightest sign of wear!

Every single one of those seats can be restored to its original fresh brilliant color almost instantly, by wiping it clean with a cloth dampened in water or cleaning fluid.

Velon won't absorb water, won't let dirt cling, gives grease no foothold. It resists alkalis and acids. It is stainless, non-inflammable. And it won't fade.

Hence every color becomes practical. Light, bright effects, colors you never dared consider before! And *Velon* can be made in almost any conceivable weave or pattern.

Will *Velon* seating last forever? That would be a preposterous claim to make for any upholstery material. Yet so far there is no evidence to the contrary!

P.S. For *completely* modern seating, use *Foamex* cushioning, Firestone's latex foam.




For the best in music, listen to the Voice of Firestone Monday evenings over the entire NBC Network.

ANOTHER CONTRIBUTION TO A BETTER WAY OF LIFE by **Firestone**

*Trademark—pronounced Vel-lón

Present-day performance of American aircraft flying at higher altitude and longer range, is due to just such precision instruments as these..



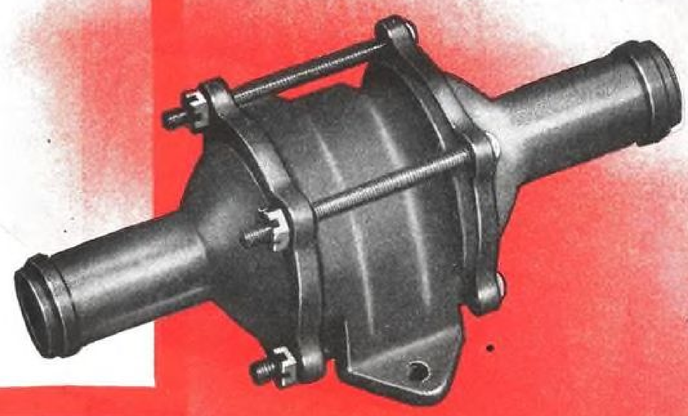

Standair Oil Pressurizing Valve


Model SOV-1-3

This valve maintains a pressure on the oil system, preventing cavitation of oil. Incorporated in the device is a relief valve which provides for relief in the event a negative pressure develops in the system. The operating pressures for this valve can be furnished to customers' specific requirements. Weight 6 ounces. Overall dimensions: Length 5⅞"; width 3"; height 2". Write for details.

Standair Fuel Tank Pressure Control Valve

Model FAZ

The FAZ Pressure Control Valve is intended for the purpose of maintaining positive pressure in aircraft fuel systems under all flight conditions. Its mechanism includes a safety release in the event excessive pressure is generated in the fuel tank and also compensates for vacuum release. Weight 1 lb., 2 oz. Overall dimensions 4¼" x 5". Write for detailed catalog sheet with typical installation.

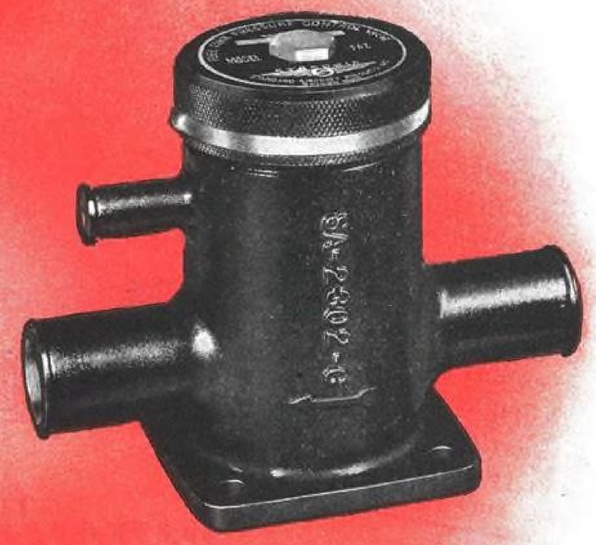



Standair Instruments are being specified in the high-speed, high-altitude Republic P-47 Thunderbolt



Standair Instruments likewise are being specified in the new Bell P-63 Kingcobra deadly fighter plane


Standard Aircraft Products Inc.
DAYTON 2, OHIO

SALES OFFICES —

Standard Aircraft Products, Inc. - - - - - 1831 Graybar Building, New York City
L. M. Payne Company, Inc. - - - - - - - - 417 Curtis Building, Detroit, Michigan
Hartwell Aviation Supply Co. - 3417 Crenshaw Boulevard, Los Angeles, California
Hartwell Aviation Supply Co. - - - - - - - - Huron Building, Kansas City, Kansas
Hartwell Aviation Supply Co. - - - - - - 608 North St. Paul Street, Dallas, Texas

KEEP BACKING THE ATTACK — KEEP BUYING WAR BONDS

Doing Little Things in a BIG WAY!

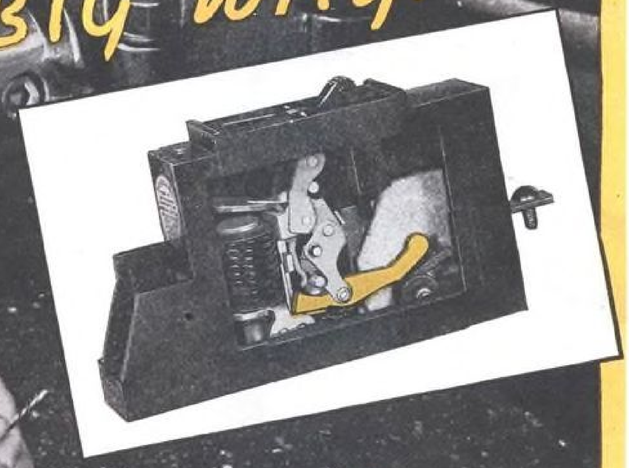

This photograph shows how the movable contact arm is welded to the "pigtail" (the stranded copper wire which carries the current from the contact arm to the overload coil). This is only one of many operations that must be performed with great care.

HEINEMANN
MAGNETIC CIRCUIT BREAKERS


The closest attention to detail goes into the manufacture of every HEINEMANN CIRCUIT BREAKER. The use of the finest equipment that can be had, coupled with individual skill and constant supervision, is the secret of their quality.

Send For Catalog Showing Complete Line and Engineering Data

HEINEMANN CIRCUIT BREAKER CO.

Subsidiary of Heinemann Electric Co., Est. 1888

115 PLUM STREET TRENTON, N. J.

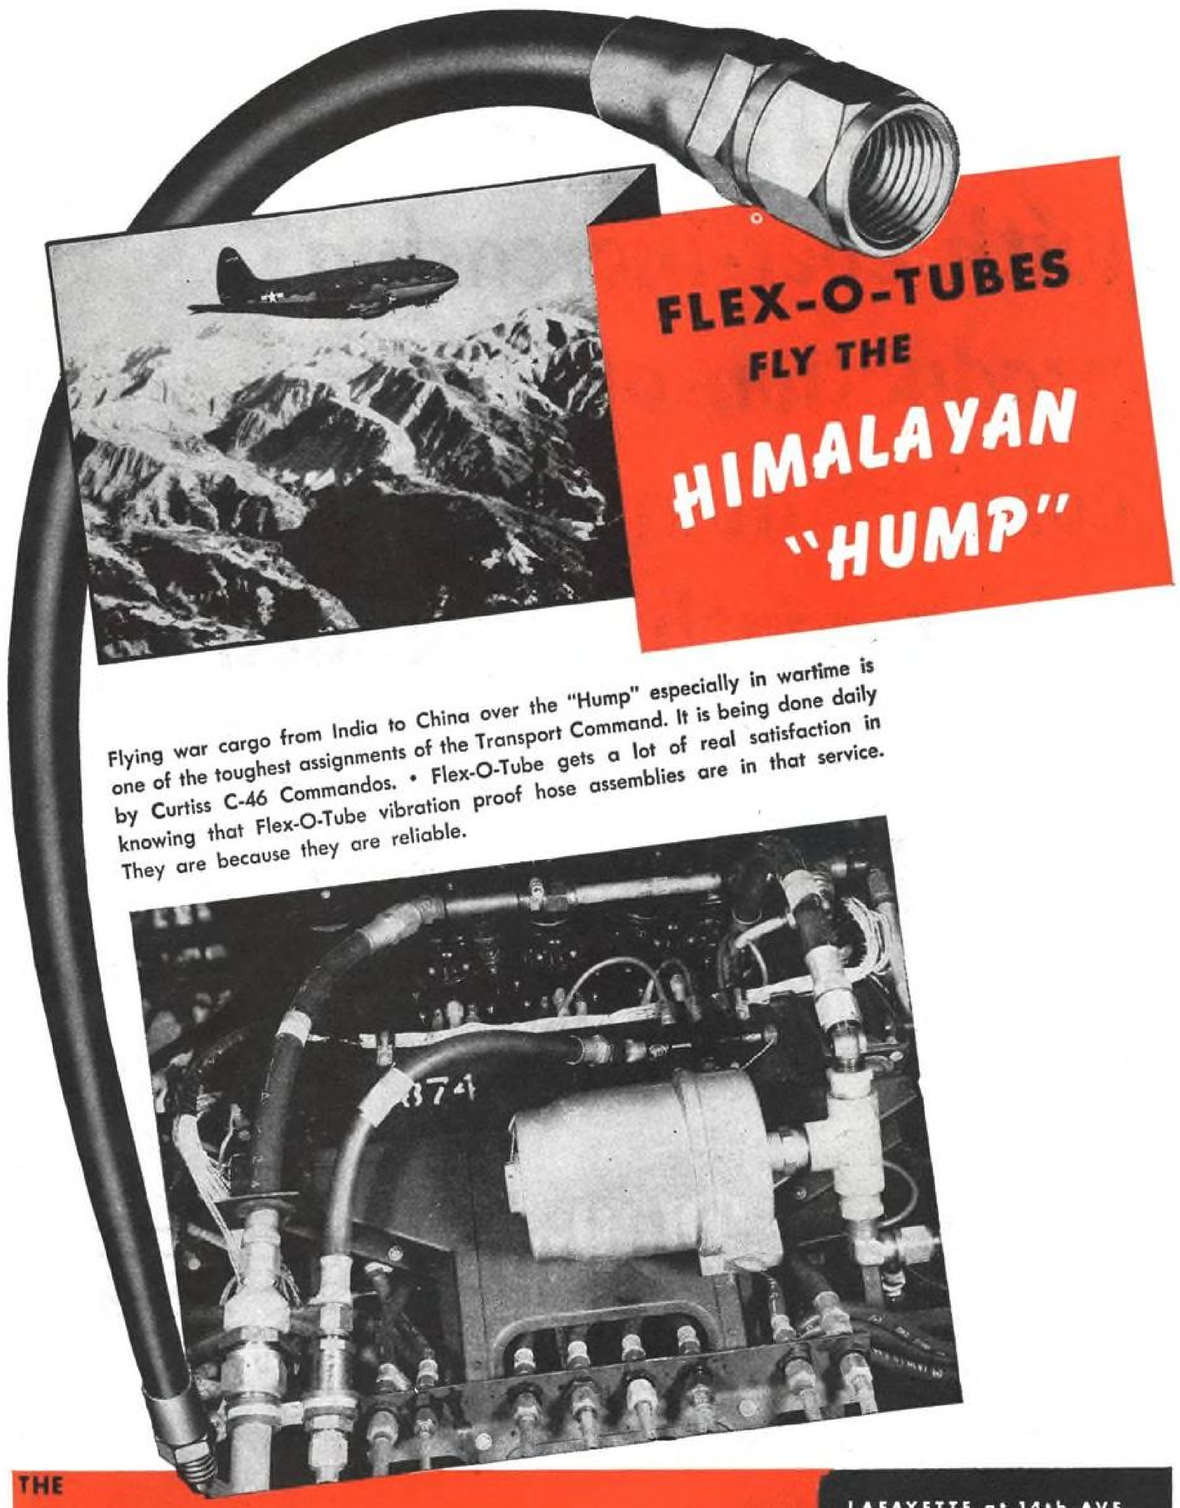

FLEX-O-TUBES FLY THE HIMALAYAN "HUMP"

Flying war cargo from India to China over the "Hump" especially in wartime is one of the toughest assignments of the Transport Command. It is being done daily by Curtiss C-46 Commandos. • Flex-O-Tube gets a lot of real satisfaction in knowing that Flex-O-Tube vibration proof hose assemblies are in that service. They are because they are reliable.

THE **Flex-O-Tube** COMPANY

LAFAYETTE at 14th AVE., DETROIT 16, MICHIGAN
Offices: CHICAGO · FORT WORTH
LOS ANGELES · NEW YORK
SEATTLE · TORONTO, ONT.


Phillips...

with ever-increasing production of combat aviation gasoline, and recently expanded research facilities... confidently promises great postwar flying fuels

Phillips
AVIATION GASOLINE

PHILLIPS PETROLEUM COMPANY, BARTLESVILLE, OKLAHOMA

A major supplier of 100 octane gasoline to the Army, Navy, and United Nations air forces

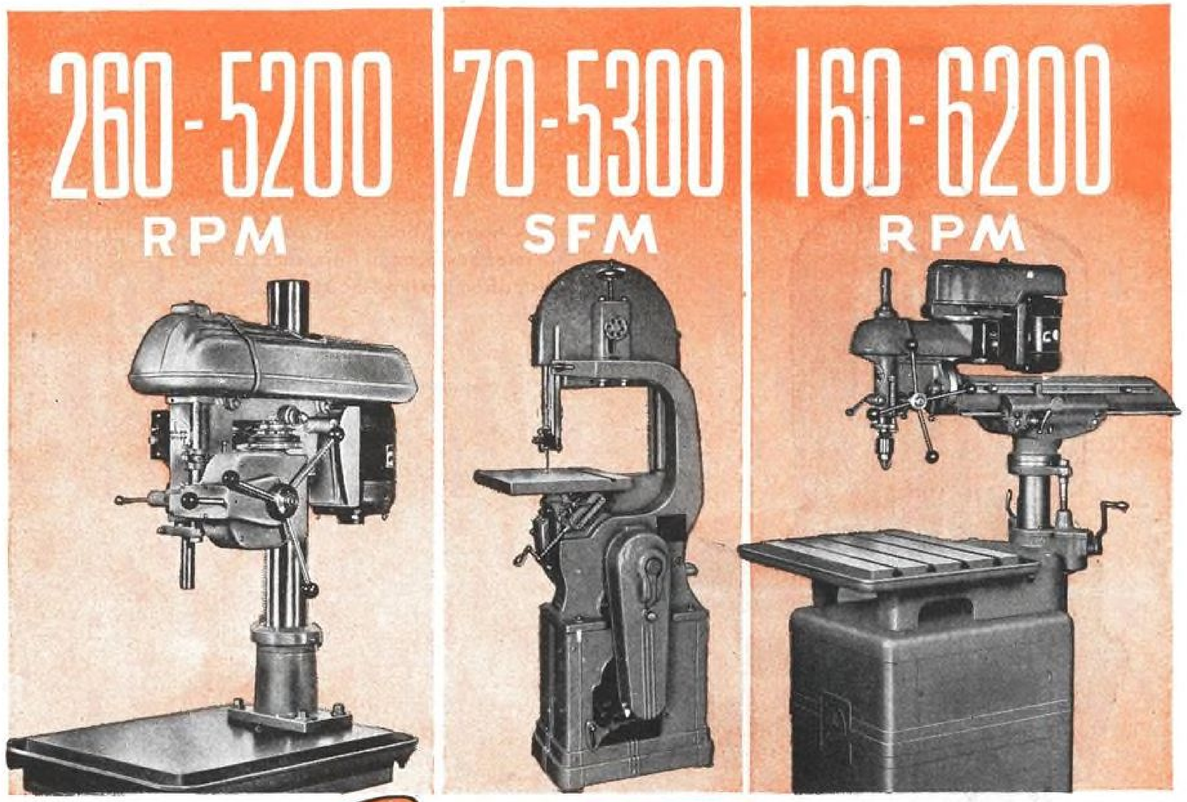

GET THE *Correct* CUTTING SPEED
WITH WALKER-TURNER MACHINE TOOLS!

Every material — every operation — has its proper speed . . . the speed at which machining is done most accurately, most economically, most efficiently.

Walker-Turner Machine Tools — because of their exceptionally wide ranges of cutting speeds — enable production men to hit the correct speed "on the button"! This gives Walker-Turner Machine Tools versatility for handling all materials in all types of operations . . . from every-day production to complicated, special tooling set-ups. These qualities may prove the answer to your own problems. Write for our catalog today!

WALKER-TURNER CO., Inc., Plainfield, N. J.

Walker-Turner **Machine Tools Offer These Advantages:**

- Versatility
- Rugged construction
- Safe, simplified operation
- Low power consumption
- Low capital investment
- Low operating and maintenance cost

RADIAL DRILL — Drills to center of 62" circle. Head tilts 45° right or left. Maximum distance nose of chuck to table, 13½". Spindle traverse, 3¾". Chuck capacity, ½".


METAL-CUTTING BAND SAW — 14" and 16" models. Geared speed reducer. Table tilts to 45° and has mitre gauge groove. Blade tensioning device has spring cushions to absorb shocks.

20-INCH DRILL PRESS — Hand or power feed. Bench or floor, single or multi-spindle models. Drills to center of 20" circle. Feed 6". Capacity 1" in cast iron, ¾" in steel.

walker-Turner COMPANY, Inc. PLAINFIELD, N.J. U.S.A.

MACHINE TOOLS

DRILL PRESSES — HAND AND POWER FEED • RADIAL DRILLS
METAL-CUTTING BAND SAWS • POLISHING LATHES • FLEXIBLE SHAFT MACHINES
RADIAL CUT-OFF MACHINES FOR METAL • MOTORS • BELT & DISC SURFACERS

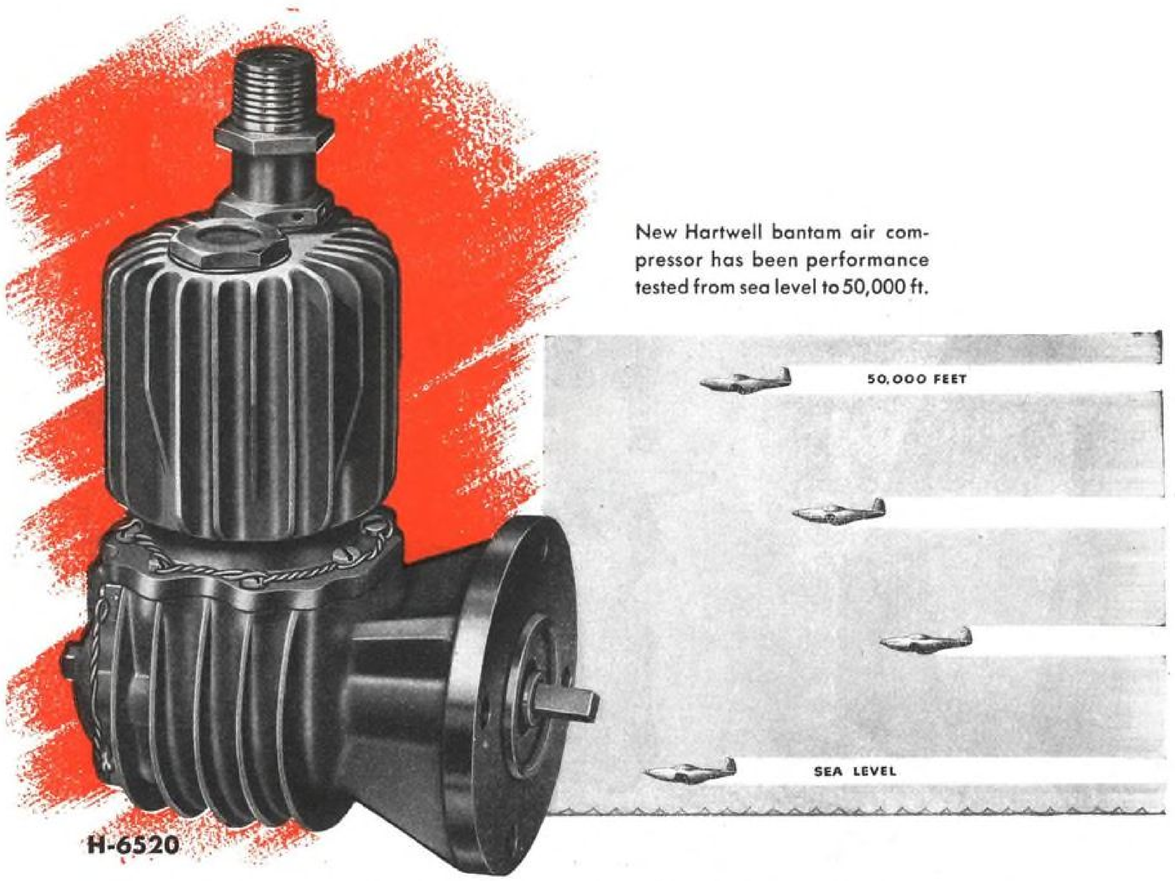

New Hartwell bantam air compressor has been performance tested from sea level to 50,000 ft.

BANTAM AIR COMPRESSOR

Provides New Vacuum Source

The Hartwell bantam air compressor meets the need for a compact, lightweight vacuum source for aircraft. Designed to solve the problem of one of the nation's largest aircraft manufacturers, it is being enthusiastically received by all who have tested it.

Here is a typical performance rating: Operating at 2,000 r.p.m., at an altitude of 30,000 feet, the Hartwell air compressor's output is 73 c.f.h. under a pressure of 9 lbs. p.s.i.

Performance tests from sea level to 50,000 feet have proved the stamina and dependability of this new lightweight air compressor. Made with a minimum number of parts, it is built to give long-term continuous service. All material, finishes and processes conform to or exceed applicable AN specifications.

For detailed engineering information write or wire our Los Angeles office.




Ready to install, the Hartwell bantam air compressor weighs 2½ pounds. Its overall height is 7 inches.



The new air compressor will operate efficiently in an inverted position—when it is engine-driven.

Single source for 779 different aircraft production parts and tools

HARTWELL
AVIATION SUPPLY COMPANY
3417 Crenshaw Boulevard, Los Angeles 16, California
Dallas, Texas · Detroit, Mich. · Kansas City, Kansas

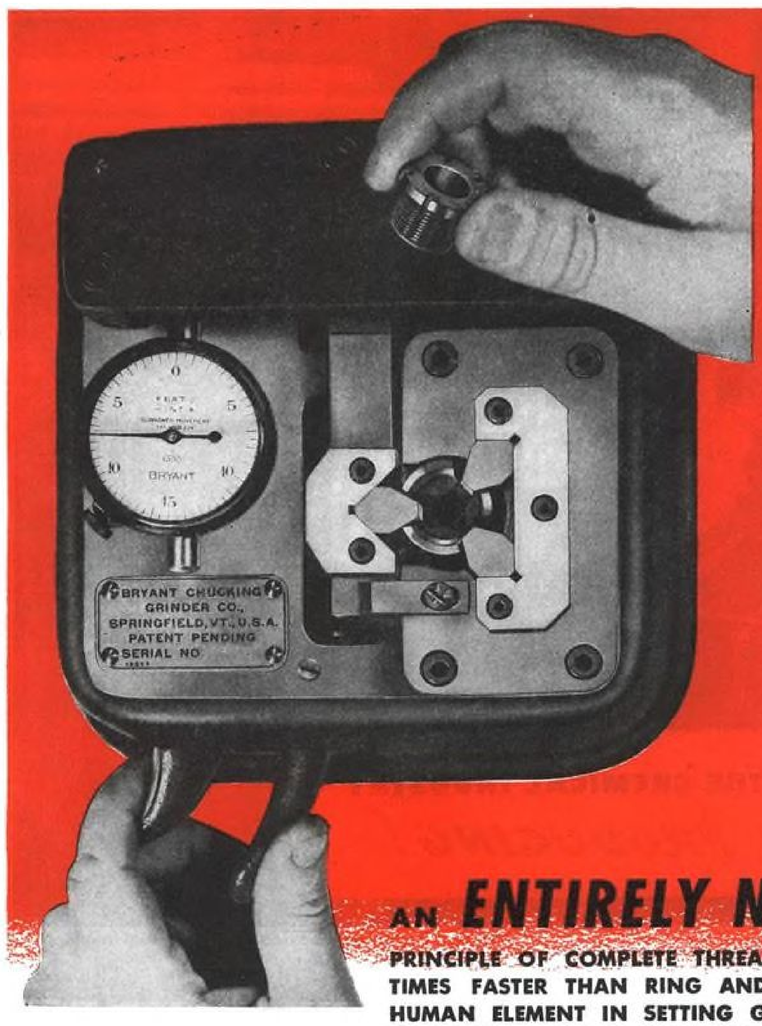

BRYANT THREAD GAGES

AN *ENTIRELY NEW* PRINCIPLE OF COMPLETE THREAD INSPECTION THREE TO FOUR TIMES FASTER THAN RING AND PLUG GAGING—ELIMINATING HUMAN ELEMENT IN SETTING GAGE WITH MASTER PLUG AND DURING INSPECTION OF WORK PART.


- One unskilled operator replaces four or five skilled inspectors.
- Gives complete over-all inspection in a few seconds.
- Thread segments have many times the life of ring and plug gages.
- Master gage accuracy transferred quickly to production parts.
- Available in three standard models. (Special sizes on request.)

The NEW BRYANT THREAD GAGE checks the entire circumference of internal and external threads in a few seconds. The operator merely drops the part on the work rest, releases the control lever, and gives the work a *partial* turn only. The dial reading shows the accumulated inaccuracies in lead, taper, pitch diameter, thread form, and the presence of burrs or surface inaccuracies.

The Bryant Thread Gage makes it possible—*as never before*—to transfer the measurements of master thread gages accurately and quickly to the parts being produced—it eliminates tedious, slow, and expensive methods requiring skilled inspectors.

Write today for illustrated folder No. G2 which gives complete details.

BRYANT CHUCKING GRINDER COMPANY
SPRINGFIELD, VERMONT, U. S. A.

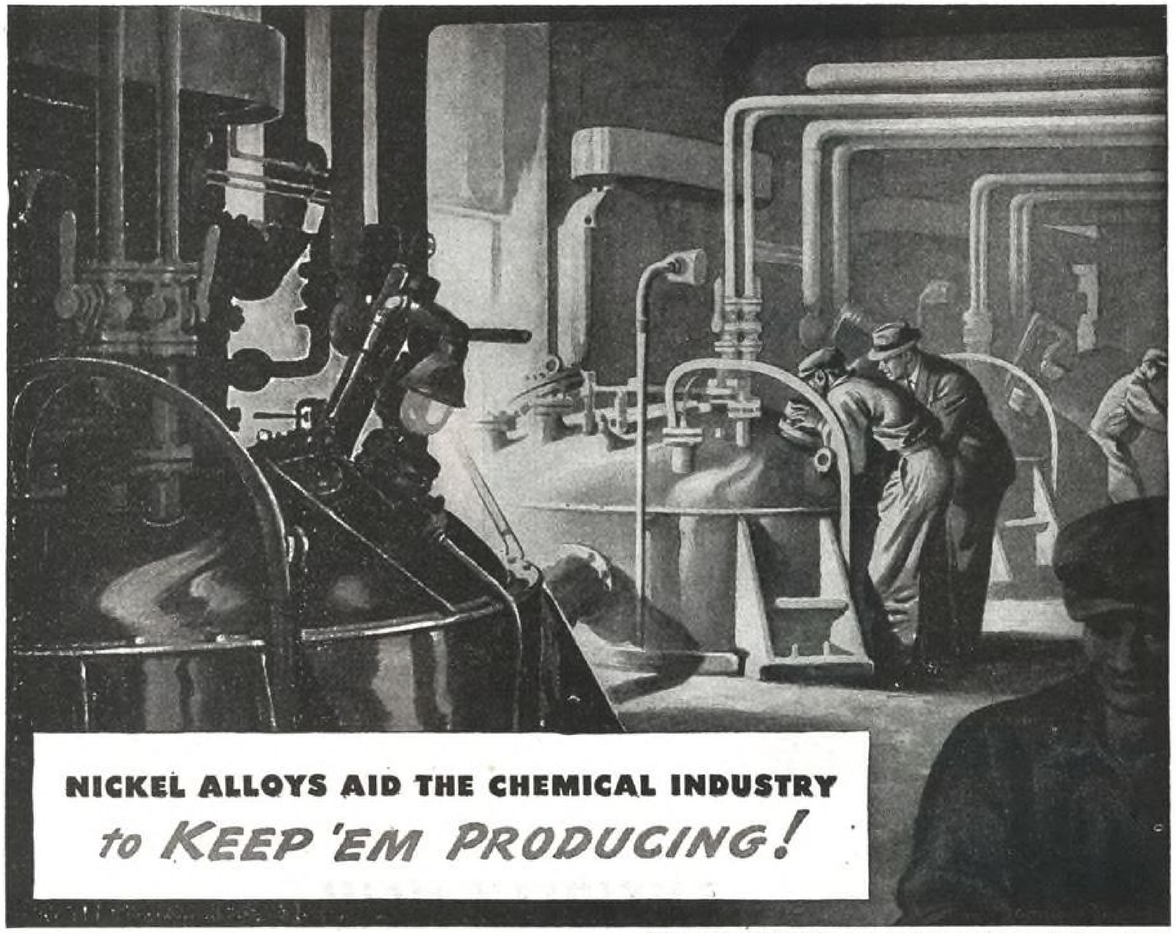

Stainless Steel Lined Polymerization Reactors in Synthetic Rubber Plant

Equipment of Stainless Steel, Nickel and Monel meets many specialized requirements

Chemical engineers have met America's wartime challenge.

They opened the gates to a mighty flood of products going to war... strategic raw materials, synthetic substitutes, and entirely new substances having advantages all their own.

A factor in this production success is the wide use of stainless steel, Monel, and other corrosion-resistant alloys containing Nickel.

For in the chemical industry corrosion is a large-scale menace.

To wage war on this enemy, chemical engineers enlisted the aid of Nickel, because Nickel imparts to other metals strength and resistance to corrosion and wear. In the chemical field, as in many others, a little Nickel goes a long way to keep equipment producing.

It prolongs the life of processing apparatus, and protects the purity, color, and uniformity of the product.

Hence, stainless and Nickel alloys are specified widely for acid heaters and caustic coolers, for high-pressure autoclaves and vacuum evaporators, for cracking towers and polymerization reactors, for shipping drums and tank cars, for pumps, piping and storage tanks, for agitators and settlers, for stills and digestors—for every type of equipment that converts laboratory experiments into full-scale chemical operations.

For years we have enjoyed the privilege of cooperating with technical men of the chemical industry... and of many others. Whatever your industry may be ... if you want help in the selection, fabrication, and heat treatment of alloys ... we offer you counsel and data.


New Catalog Index

New Catalog C makes it easy for you to get Nickel literature. It gives you capsule synopses of booklets and bulletins on a wide variety of subjects—from industrial applications to metallurgical data and working instructions. Why not send for your copy of Catalog C today?



* Nickel *

THE INTERNATIONAL NICKEL COMPANY, INC., *67 Wall St., New York 5, N. Y.*

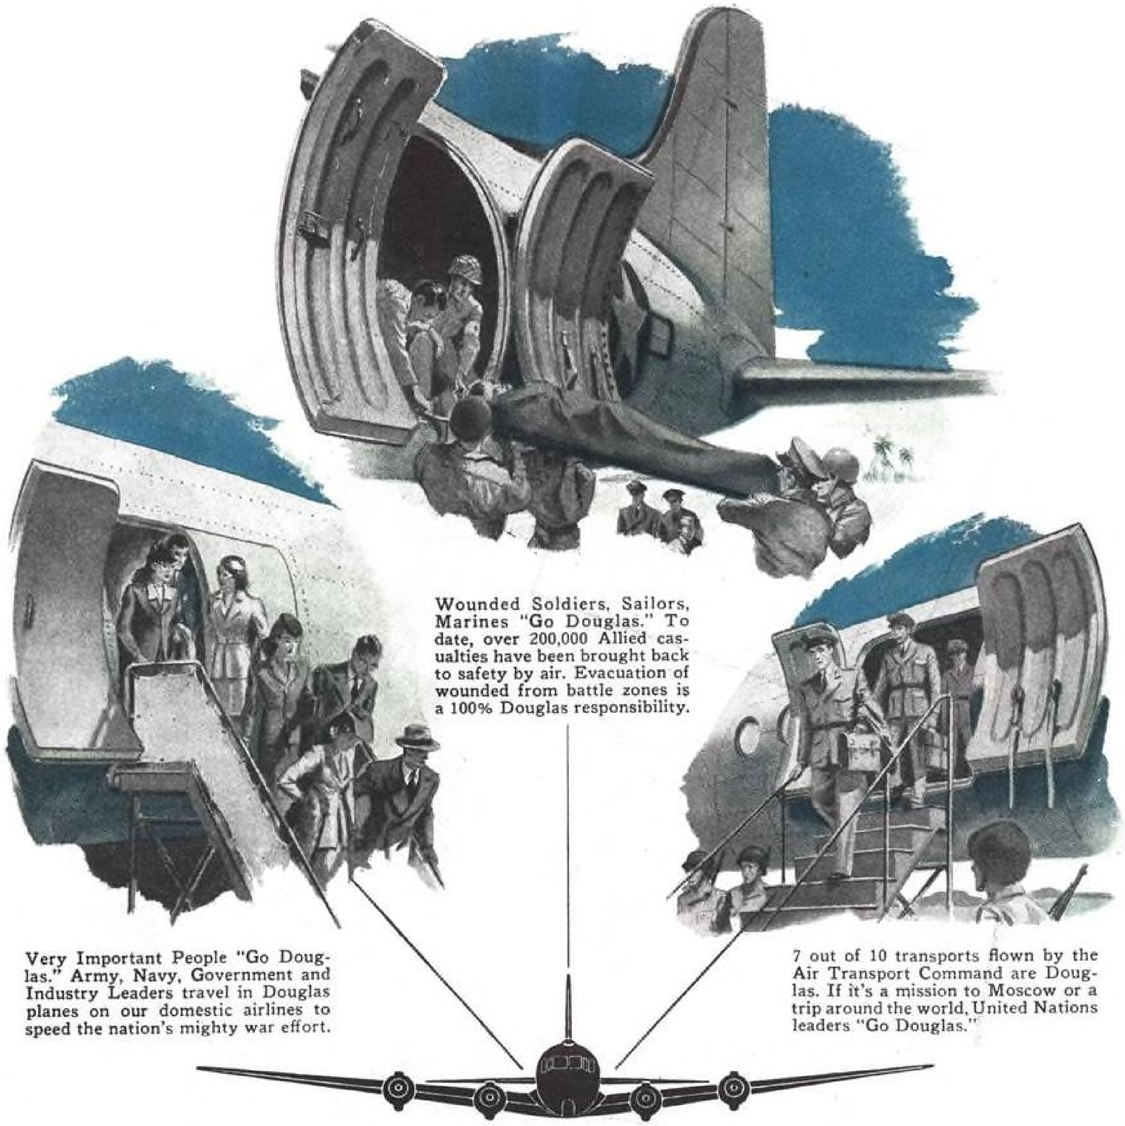

Wounded Soldiers, Sailors, Marines "Go Douglas." To date, over 200,000 Allied casualties have been brought back to safety by air. Evacuation of wounded from battle zones is a 100% Douglas responsibility.

Very Important People "Go Douglas." Army, Navy, Government and Industry Leaders travel in Douglas planes on our domestic airlines to speed the nation's mighty war effort.

7 out of 10 transports flown by the Air Transport Command are Douglas. If it's a mission to Moscow or a trip around the world, United Nations leaders "Go Douglas."


They all GO DOUGLAS

First AROUND THE WORLD · *First* THE WORLD OVER

Douglas AIRCRAFT

DOUGLAS EQUIPPED AIRLINES: American Airlines — Hawaiian Airlines Ltd. — Braniff Airways — Chicago & Southern Air Lines — Colonial Airlines — Delta Air Lines — Eastern Air Lines — Western Air Lines — Northeast Airlines — Northwest Airlines — Pan American Airways — Pennsylvania-Central Airlines — TWA — United Air Lines — China National Airways — Pan American-Grace Airways — Avianca (Aerovias Nacionales de Colombia) — Cia. Mexicana de Aviacion — Panair Do Brazil — Cia. Nacional Cubana de Aviacion, S. A. — Uraba, Medellin and Central Airways — Cruzeiro do Sul (Brazil) — Primeas Lineas Uruguayas de Navegacion Aerea, S. A. — Aerovias de Guatemala, S. A. — Canadian Pacific Airlines — Australian National Airlines — Royal Dutch Airlines (K.L.M.) — Royal Netherlands Indies Airways (K.N.I.L.M.) — Sabena (Belgian Congo) — Swissair (Switzerland) — A.B. Aerotransport (Sweden) — Indian National Airways — L. A. P. E. (Spain) — Aer Lingus (Ireland) — American Airlines of Mexico — British Overseas Airways (BOAC) (England).

RUST-PROOFING

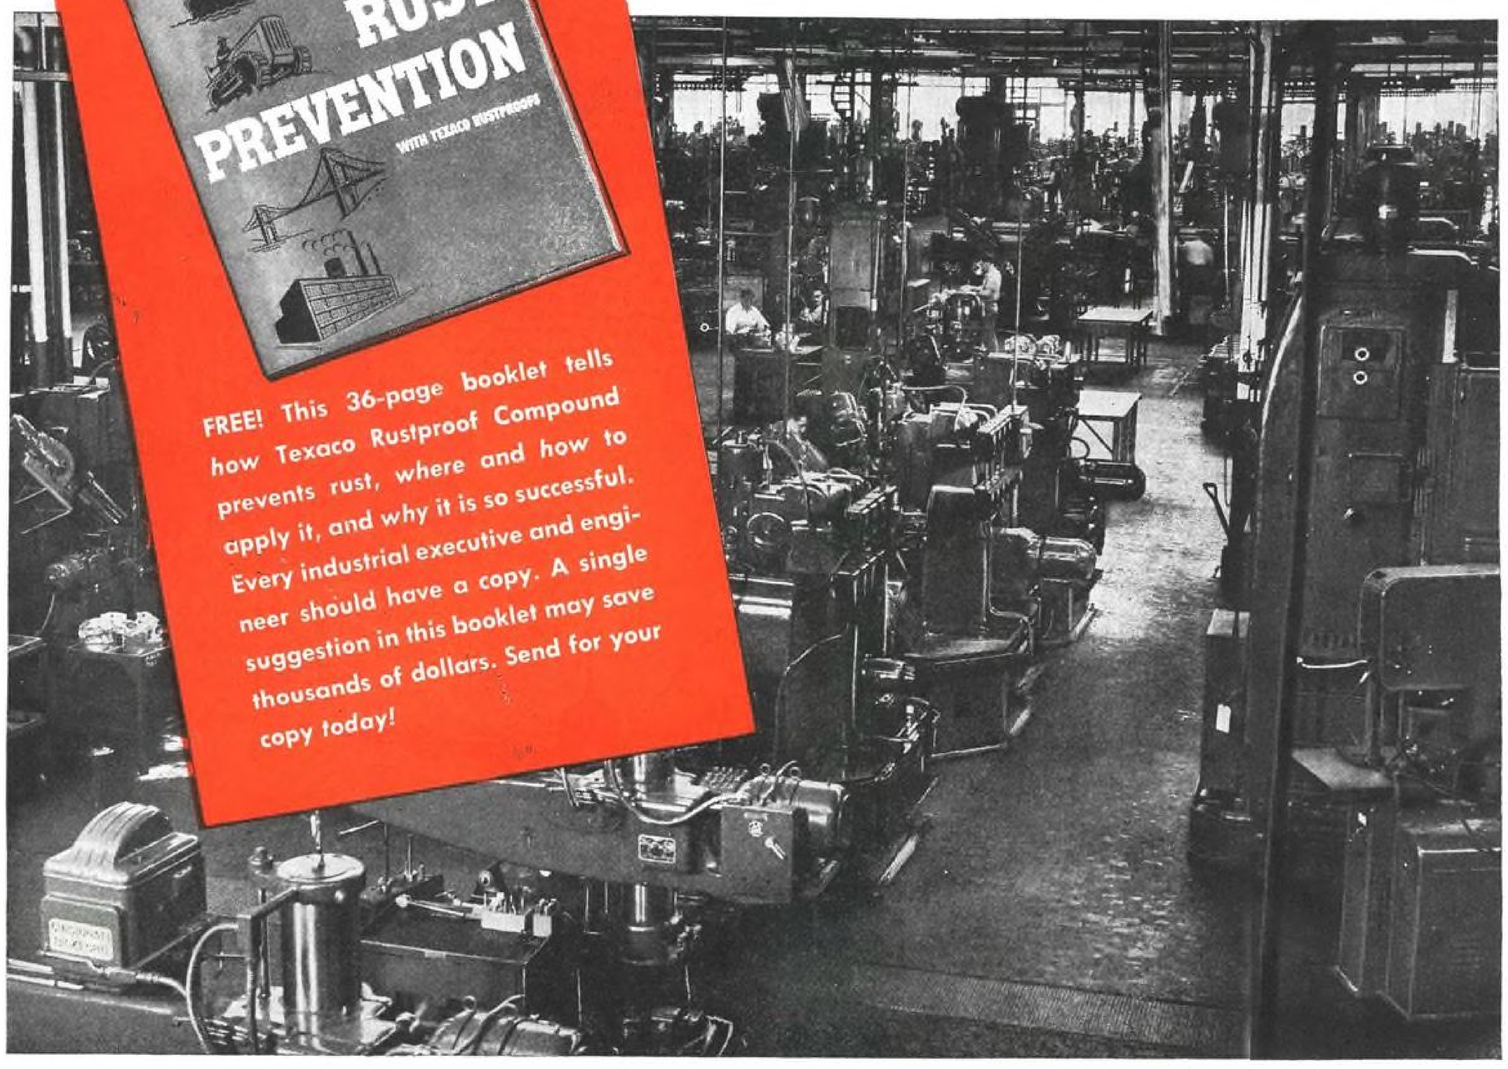

A RECONVERSION REQUIREMENT..

IMPORTANT in any plan for smooth, speedy reconversion to peacetime production is protection of unused equipment against destructive RUST. Government-owned equipment, according to official specifications, must be rustproofed with minimum delay after "shut-down". And if the equipment is your own, you will likewise wish to protect it fully until it is disposed of or put back in use.

In either case, you will find *Texaco Rustproof Compound* and other Texaco rust preventives *thoroughly effective*—for weeks or years—in protecting costly machines, precision tools, and other production equipment. These tested-in-use products meet Government specifications for *exterior* or *interior* application.

Easily applied with brush or spray gun, *Texaco Rustproof Compound* provides a penetrating, self-sealing film which is not only waterproof but also resistant to chemicals and fumes. It remains plastic, healing over any scratches and abrasions. It is long-lasting and extremely economical.

Texaco Rustproof Compound has proved highly successful in protecting all types of parts and equipment from weather and salt water in overseas shipments.

No matter what your rustproofing requirements—exterior or interior—there is a suitable Texaco rustproofing product to meet your needs, available to you through more than 2300 Texaco distributing points in the 48 States. *Order NOW!*

The Texas Company, 135 East 42nd Street, New York 17, N. Y.

TEXACO

TEXACO Rustproofing Products

TUNE IN THE TEXACO STAR THEATRE EVERY SUNDAY NIGHT—CBS

HELP WIN THE WAR BY RETURNING EMPTY DRUMS PROMPTLY

NAME YOUR SPEED!



...one of the many vital questions on the "BELLANCA AIRCRAFT QUIZ"

AFTER the war, when America settles down to the business of peace and "the pursuit of happiness" in a liberated world, you'll see more sportsmen's air races. You'll see more air travel, too. And wherever flying people meet you'll hear talk of speed!

There's a big difference of opinion about speed. Our Aircraft Quiz has brought that out from hundreds of the flying enthusiasts who've sent in their Quiz returns. Some believe in "speed at any price"—others prefer to compromise a little on speed for the sake of greater efficiency, added safety, more range. How do *you* vote?


Speed is only one of the vital questions raised in our Aircraft Quiz. It *is* a vital question, too. Bellanca is going to build the *right* speed into the post-war planes which many are already trying to buy. Wait until we've finished our war work, *all* of our war work, and you'll see a Bellanca post-war plane that will give private owners exactly what they want. Its speed will be to the taste of the majority.

But that isn't all. Many other Bellanca features will be in line with popular demand. Engines, landing gear, range, seating, construction, capacity and other essential factors that are covered in our Aircraft Quiz are now being voted on, *Yes* or *No*, by men and women all over America—by many in far-distant places, serving with the Armed Forces—who are checking off their answers on this popular Quiz: In this helpful way, you can let us know what *you* want *us* to build for your post-war flying.

Why don't you send for this Quiz today? Just give us your name and address—we'll mail you the Quiz, and later you'll receive our report on all returns, so you can compare your answers with thousands of others. Write us now! ...Bellanca Aircraft Corporation, Dept. S-3, New Castle, Delaware.

Keep on Buying U. S. WAR BONDS

BELLANCA

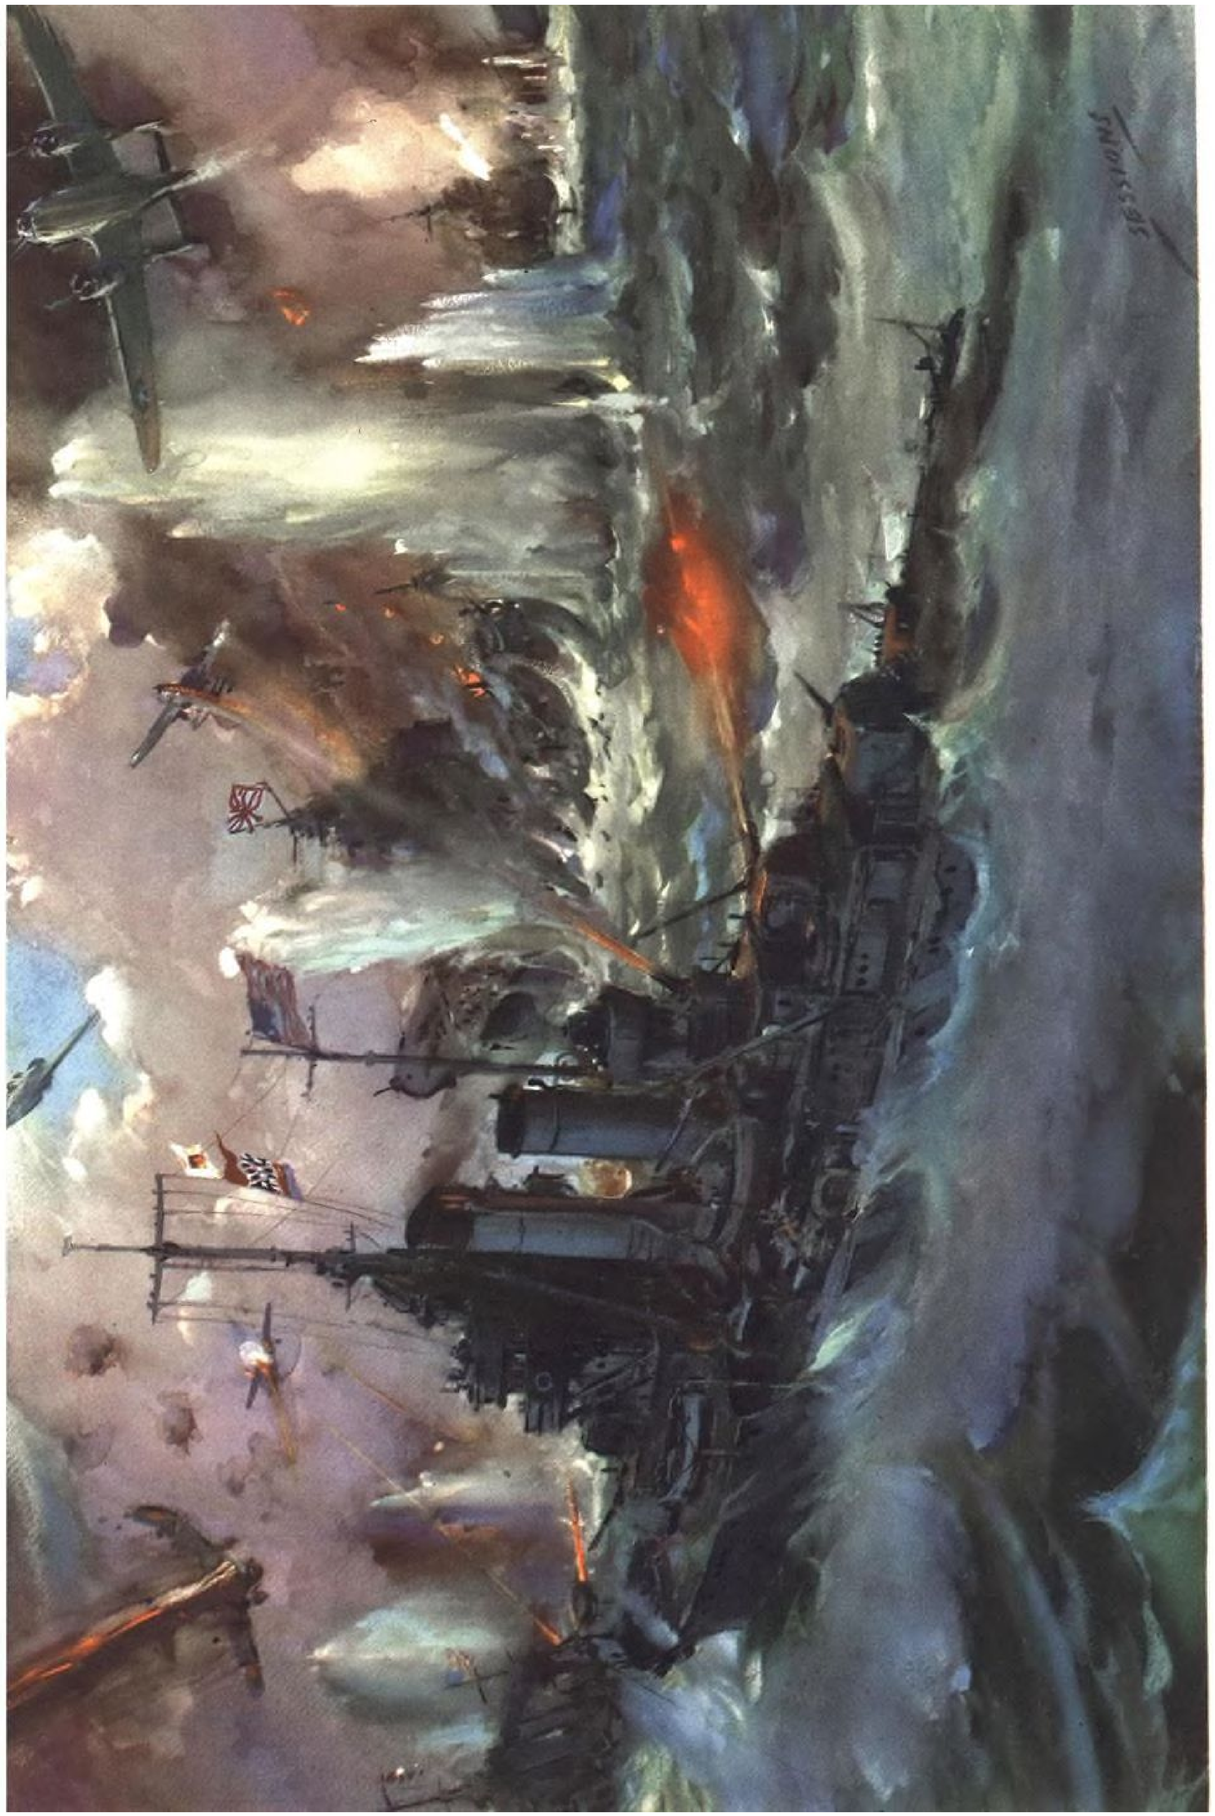


NO. 11 OF A SERIES "HIGHLIGHTS OF WORLD WAR II" PRESENTED BY TUBE TURNS (INC.) LOUISVILLE, KY. SEE OTHER SIDE

Naval Victory Off the Solomons BY JAMES M. SESSIONS

Before you say "Impossible to forge" ...ask Tube Turns

Impossible to forge? What's preventing it? . . . a question of die design . . . forging accuracy . . . heat treat precision . . . size . . . quantity production . . . cost . . . research facilities . . . or what? If you're stymied by one of these problems, we sincerely believe Tube Turns can help you. First, we offer you the cooperation of a RESOURCEFUL engineering group that welcomes tough technical and development problems. Second, you deal with an organization of forging specialists — from executives to shop crews — with an extraordinary record in producing DIFFICULT upset forgings of steel and aluminum. Third, this manpower is supported by complete, up-to-the-minute FACILITIES for production, die making, laboratory control and research. Write US in detail about your own product and requirements . . . either immediate or prospective. Address TUBE TURNS (Inc.), Louisville 1, Ky.

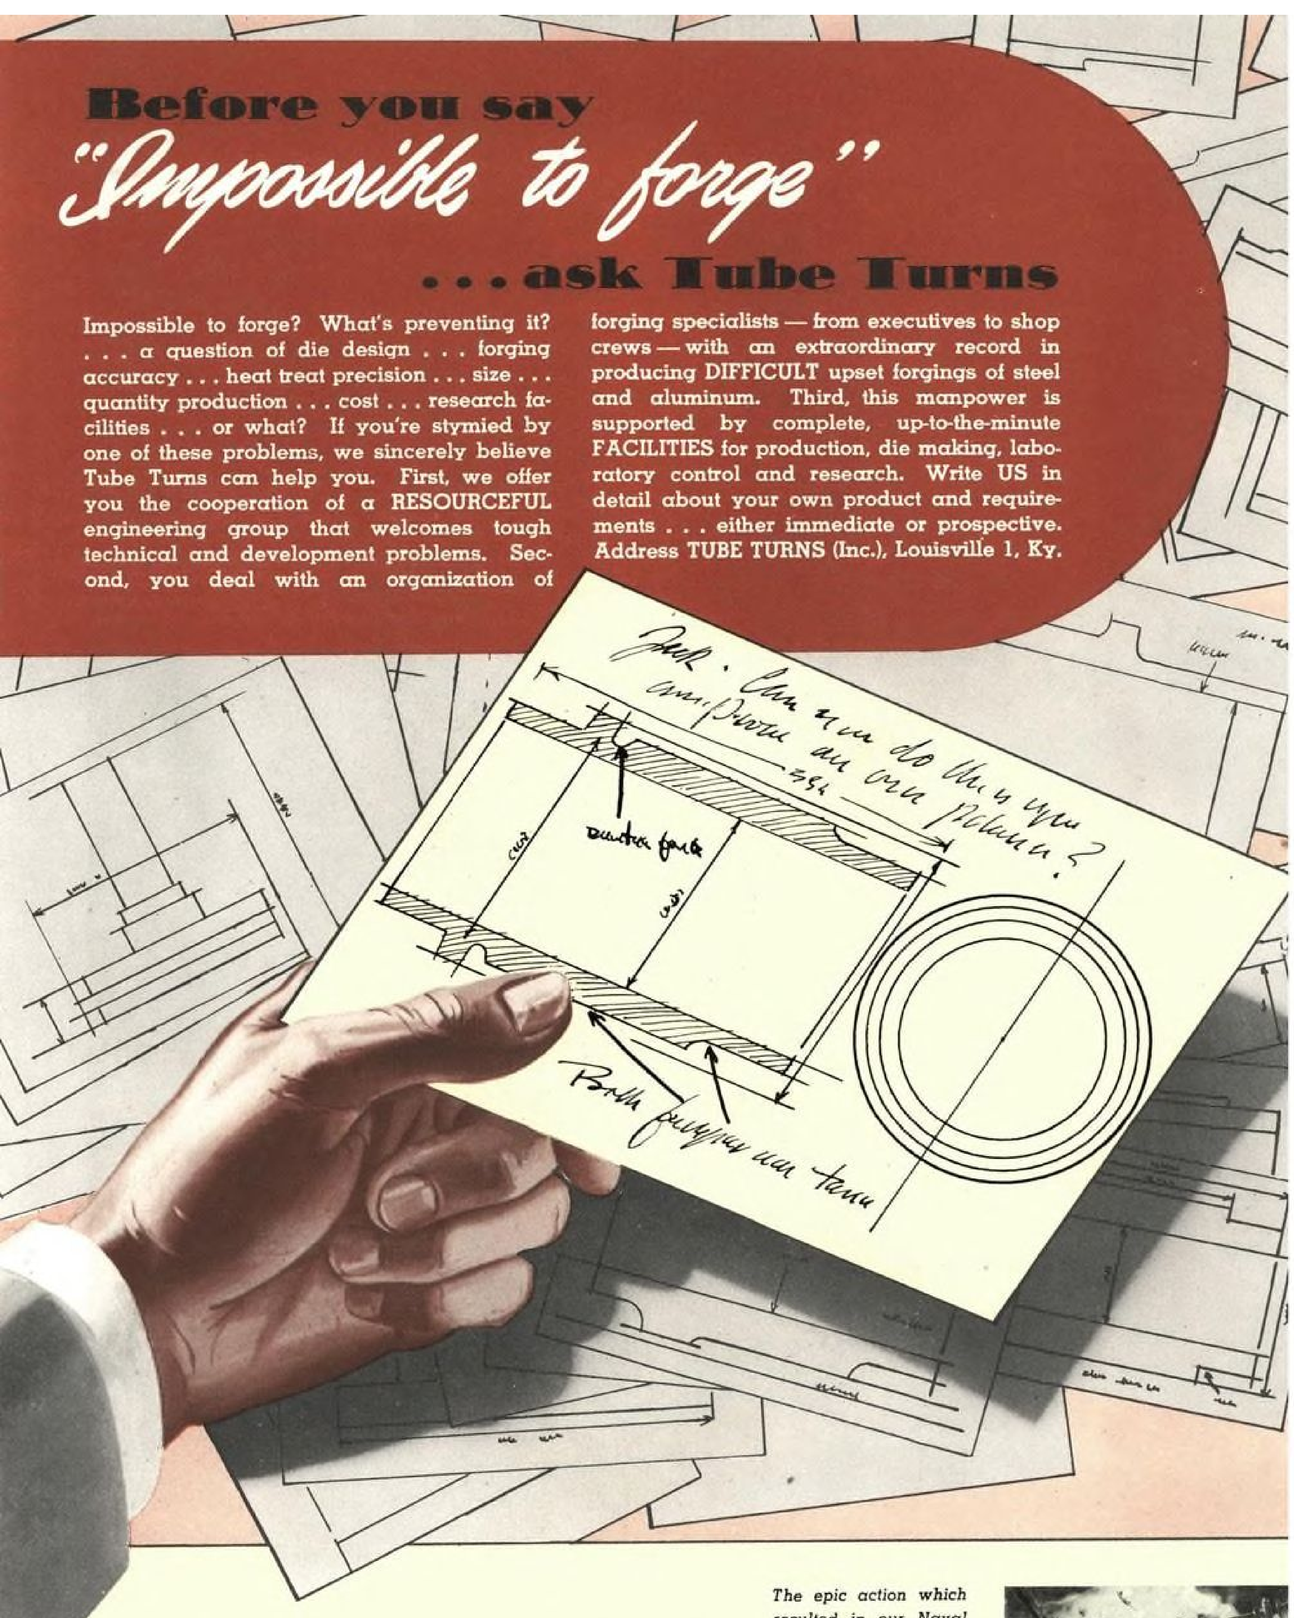


TUBE TURNS *Forgings for Industry*

The epic action which resulted in our Naval victory over the Japanese in the Solomons is typified by the Sessions painting on reverse side.



Motor-bike built for two

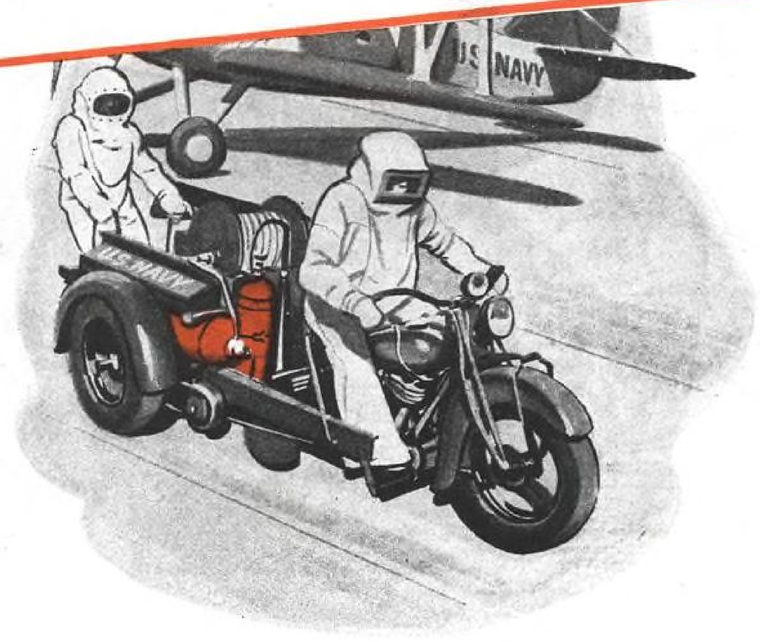


Here's an excellent answer to the need of airports for highly-mobile fire-extinguishing equipment. Manned by asbestos-clad firemen and loaded with Kidde carbon dioxide extinguishers, this motorcycle "crash truck" can rush right up to crash fires and other blazes and snuff them out quickly under a blanket of carbon dioxide gas.

Kidde extinguishers are being mounted in many ingenious ways to make their fast fire-killing effect fully available to air fields. They're carried on large emergency trucks, two-wheeled trailers, jeeps—even on "scooters."

If *you* have a fire protection problem —in the air or on the ground—the wide experience of Walter Kidde & Company in this field will be helpful in finding the best solution. Just drop us a line!

Kidde

WALTER KIDDE & COMPANY, INC., 140 CEDAR STREET, NEW YORK 6, N. Y.

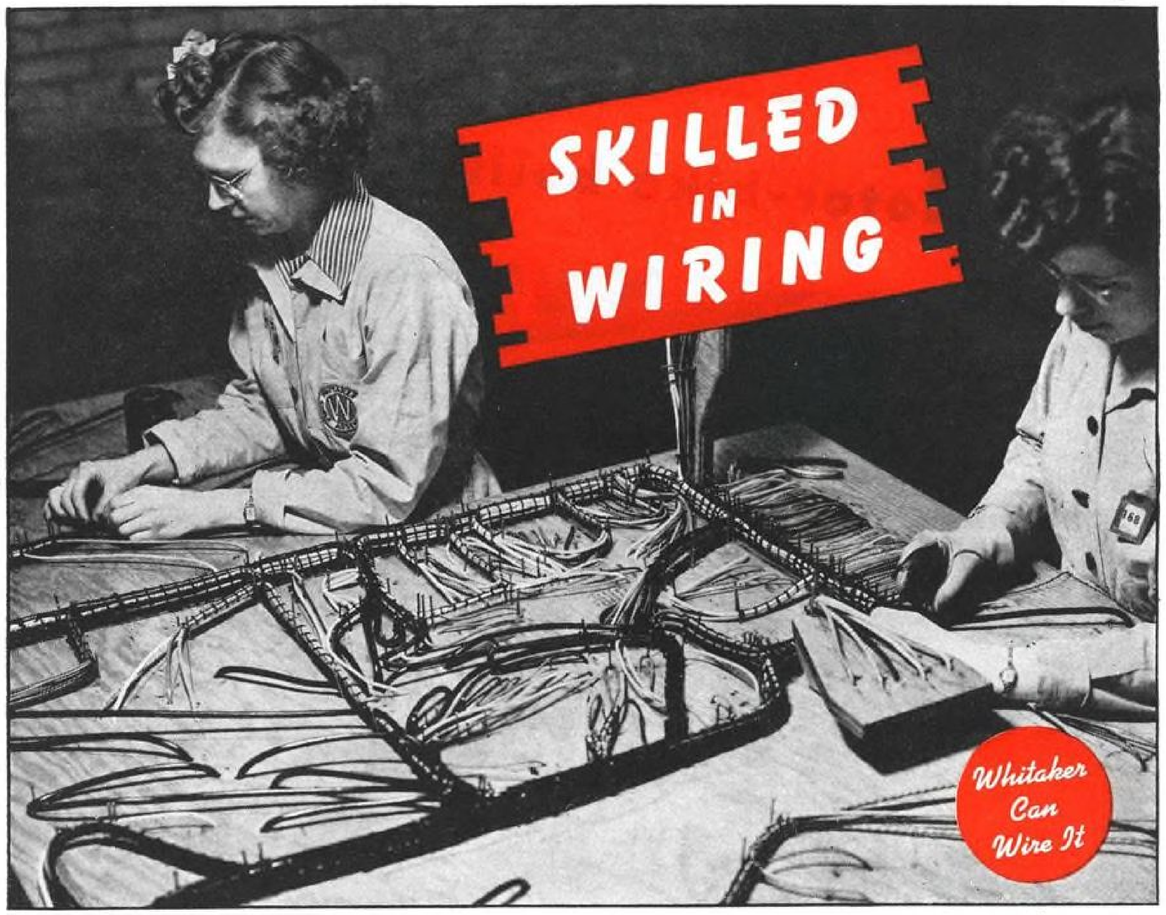

Whitaker workers have the will and the skill to produce wiring assemblies to your specifications

The girls who work in our plants are skilled technicians—and we can prove it. For example, the picture shown above illustrates one of the many complicated assemblies being turned out for war needs by our St. Joseph plants. The job looks difficult, and it would be except for the fact that we have a quarter of a century of experience.

Investigate and you will find that Whitaker has the "know how" and ample plant facilities to turn out cable assemblies, wiring harnesses, and flexible leads for power and lighting . . . Your inquiries are solicited. Whitaker Cable Corporation, 1301 Burlington Ave., Kansas City 16, Mo. . . . St. Joseph, Mo. . . . Philadelphia . . . Oakland.

WHITAKER

Cables, Wiring Harnesses and Assemblies for Automotive, Aircraft, Marine and Radio Equipment

A Complete Paint Service for Peacetime Aviation

Out of valuable wartime experience, gained in the manufacture of millions of gallons of finishing materials for allied war-planes, is coming a complete Berry Brothers' postwar paint service for all branches of the aviation industry.

Berry Brothers' aviation finishing materials have enjoyed industry-wide leadership for more than 30 years . . . dating back to the First World War . . . and this new and finer postwar service will further exemplify this leadership.

Carefully formulated materials will be available for every aviation production and maintenance need, and sales and service facilities will be established to provide convenient distribution.

Commercial airline managements, fixed base operators and individual plane owners will all be well served by this new Berry Brothers' postwar aviation program.




BERRY BROTHERS INC.
Paints · Varnishes · Enamels · Lacquers
Detroit 7, Mich. Walkerville, Ont.

ARMY NAVY

Leading Producers of Aviation Finishing Materials in War and Peace, for over 30 Years

BOSTON • JERSEY CITY • CINCINNATI • CHICAGO • ST. LOUIS • INGLEWOOD, CALIF. • MONTREAL • WINNIPEG • TORONTO

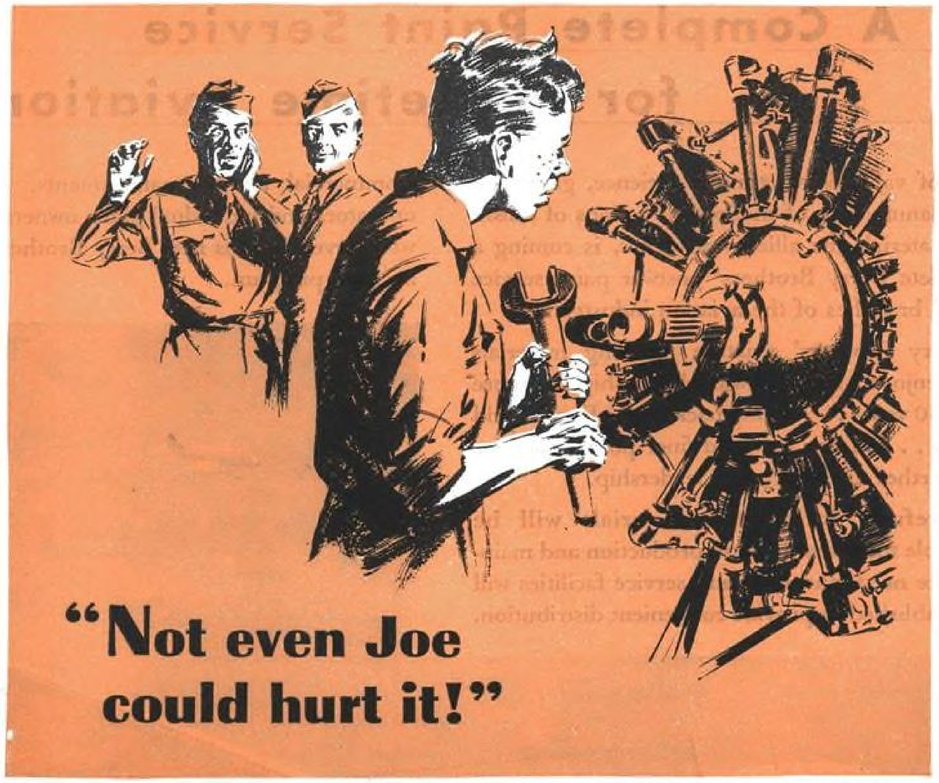

"Not even Joe could hurt it!"

There's one in every squadron. The kid who has two left hands of five thumbs each, and as much mechanical aptitude as a mule . . . yet craves to be a mechanic!


When Joe wanted to take down a motor on his own time—for practice—somebody said "Let him play around with the Jacobs. Not even Joe could hurt it" . . . which is straining the truth slightly. Joe, or anybody else who doesn't know how, can raise hob with a Jacobs. The tolerances on the Jacobs are as fine as on any aircraft engine, and assembly or dis-assembly needs expert knowledge and a delicate touch.

But because the Jacobs is simple in its structure, has all its parts easily accessible, crew chiefs find that green hands can become proficient working on the Jacobs in less time than any other engine in service requires.

A DECADE of development went into the Jacobs before the AAF got it . . . and that decade has paid big dividends in the AAF training program. The service period of 350 flight hours between major overhauls has gradually been extended as high as 1050 hours! One major overhaul instead of three, with lowered maintenance time and costs! And fifteen student pilots trained per overhaul—instead of five! . . .

Remember, too, that training operation, with hard student handling, frequent take-offs and landings, gives the engine more wear than most engines get in combat or commercial service.

So the Jacobs engines not only give a better break to GI Joe, who takes care of them . . . but to students and instructors, in more hours of dependable service . . . to AAF administration, in full flying schedules, higher output of pilots . . . and to taxpayers, in lower maintenance costs!



Largest maker of aircraft engines in the medium power class, Jacobs will have new postwar models . . . for light planes and medium transports . . . engines that may be the basis of profitable peacetime operations! . . . Inquiries invited . . . Jacobs Aircraft Engine Company, Pottstown, Pa.

JACOBS · **Pottstown, Pa.**


Here's Automatic Propeller Performance

. . . for your Private Plane of Tomorrow

EXPERIENCED flyers know that for each foot of the four phases of flight—takeoff, climb, cruise, landing—there's an optimum propeller pitch . . . a definite angle at which the propeller knifes into the air with just the right size of bite.

That's what you get automatically every foot of the way with the Aeromatic self-pitching propeller. Completely automatic and self-acting, Aeromatic adjusts to the most advantageous pitch during each second of flight . . . assures you minimum engine wear and fuel consumption, maximum flight performance and flying satisfaction at each stage of flight.

Aeromatic gives you those things automatically, through aerodynamic and centrifugal forces, without controls or instruments. There's no abrupt change from one pitch to another: Aeromatic's change of pitch *flows* rather than "happens" . . . quietly exploiting the laws of aerodynamics for you, rather than bucking them. In use on today's military planes of 100 to 450 HP, Aeromatic will give the private flyer of tomorrow maximum get up . . . go . . . flying efficiency and pleasure. Many of tomorrow's flyers will specify variable-pitch propellers . . . many will insist upon Aeromatic, because *it gives variable-pitch performance automatically*. Engineering and performance data are now available to manufacturers and others. Don't hesitate to write.

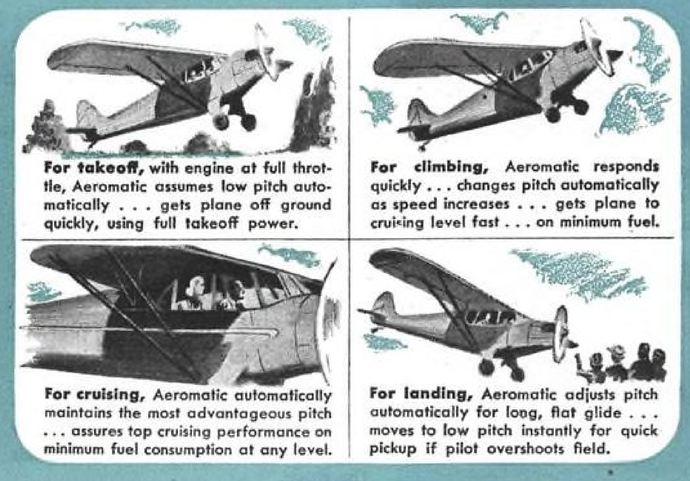

For takeoff, with engine at full throttle, Aeromatic assumes low pitch automatically . . . gets plane off ground quickly, using full takeoff power.

For climbing, Aeromatic responds quickly . . . changes pitch automatically as speed increases . . . gets plane to cruising level fast . . . on minimum fuel.

For cruising, Aeromatic automatically maintains the most advantageous pitch . . . assures top cruising performance on minimum fuel consumption at any level.

For landing, Aeromatic adjusts pitch automatically for long, flat glide . . . moves to low pitch instantly for quick pickup if pilot overshoots field.

The Propeller with a Brain for Tomorrow's Plane

Aeromatic


Air Controlled *Automatic Propeller*

Licensed under patents of Everel Propeller Corporation


KOPPERS Company, Bartlett Hayward Division, Baltimore 3, Md.



Pattern indication gives the pilot a visual "picture" of his attitude at all times, regardless of the degree of bank, climb, or dive.

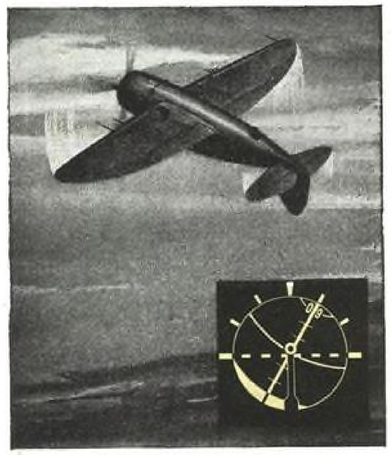

No angular limitations! The Sperry Attitude Gyro indicates pitch and bank without any angular limitations!

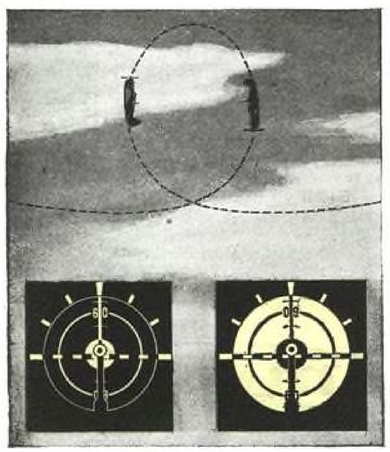

No caging! Because there are no angular limitations, the instrument *never* has to be caged . . . not even in acrobatics!



Attitude Unlimited!

New Sperry Attitude Gyro provides pattern indication . . . has no angular limits . . . needs no caging!

WITH THE NEW Sperry Attitude Gyro Indicator a pilot can, *for the first time,* loop, roll, dive, climb, or fly at any angle with visibility zero, and still always know the attitude of his plane relative to the earth.

The spherical dial is marked to provide the same "pattern" type of indication whether by daylight or by any artificial light . . . a single glance tells the story.

The suspension for the spherical dial of this new Sperry instrument allows full 360° freedom of indication in the roll and pitch axes of the airplane.

A small gyro spinning at 23,500 r.p.m. stabilizes the sphere and keeps it erect in relation to the earth's surface. *The airplane actually maneuvers around the indicating sphere.*

The Sperry Attitude Gyro makes instrument flying safer, easier, and facilitates maneuvers and acrobatic training.

With it there is no possibility of the gyro's tumbling, even in extremely turbulent air. And, of course, its advantages in combat are obvious.

Sperry Gyroscope Company INC.

GREAT NECK, NEW YORK • DIVISION OF THE SPERRY CORPORATION

Gyroscopics • Electronics • Automatic Computation • Servo-Mechanisms



New

ROMEC

Water Injection Pump

with SUPERCHARGER

This pump develops EXTRA Horsepower, when needed in any emergency, for instantaneous speed pick-up. How?


By adding water, vaporized in the combustion chamber, to step up engine performance. Pump is inserted through bottom of supply tank. No more vapor forming in suction lines at high altitude because both suction and bleeder lines are eliminated. That saves weight too. Unit stays cool because the pumping mechanism is submerged and heat is quickly dissipated. Relief valve discharges directly into tank. This agitation greatly reduces freezing hazard.

Built with a supercharger directly above the pump. Engineered for wide temperature ranges. Non-corrosive throughout. It's performing mechanical miracles now. Write for details on Model 7500-A.

Romec

PUMP COMPANY


117 Abbey Road, Elyria, Ohio

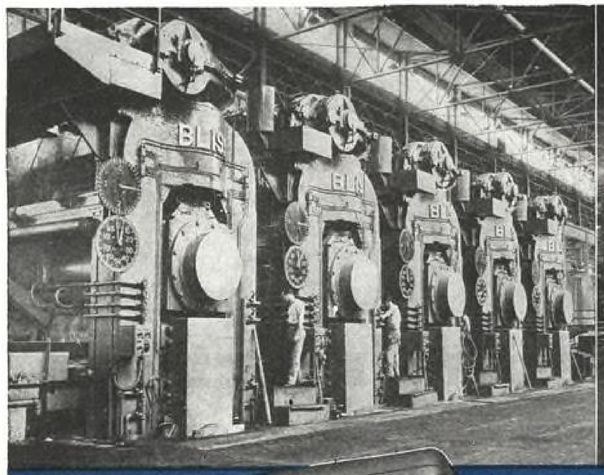

Five stand tandem four high Rolling Mill



Enclosed two point straight side presses

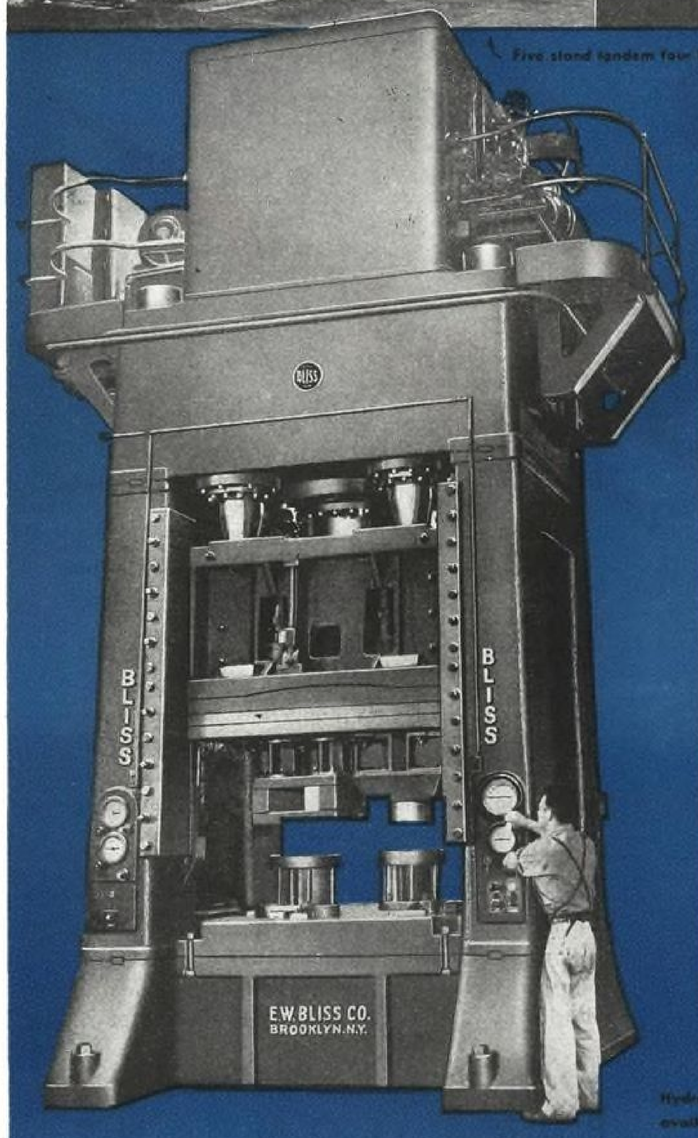

Single, Double and Triple Action Presses

•

Mechanical and Hydraulic

•

Automatic Presses

•

Feeds and Material Handling Devices

•

Marquette Pneumatic Die Cushions


•

Can and Drum Making Machinery

•

Rolling Mill Equipment

Hydraulic double action presses also available in mechanical design



FROM STOCK TO FINISH-BLISS



Complete Metal Working Installations for Reconversion





Reconversion allows a fresh start... An opportunity that seldom occurs... Clear out makeshift machinery... Consider modern designs of automatic equipment... Resultant economies quickly offset initial investment... Install Bliss from start to finish!

E. W. BLISS COMPANY

53rd Street & 2nd Avenue, Brooklyn 32, New York

TOLEDO, OHIO • CLEVELAND, OHIO • SALEM, OHIO • HASTINGS, MICHIGAN • DETROIT, MICHIGAN
CHICAGO, ILL. • ROCHESTER, N. Y. • NEW HAVEN, CONN. • PHILADELPHIA, PA. • BOSTON, MASS.


E. W. BLISS COMPANY OF CANADA, LTD., TORONTO, ONTARIO, CANADA

Agents — Moore Machinery Company, Los Angeles and San Francisco, California

High speed automatic can tester




Enclosed gap frame Inclinable Presses

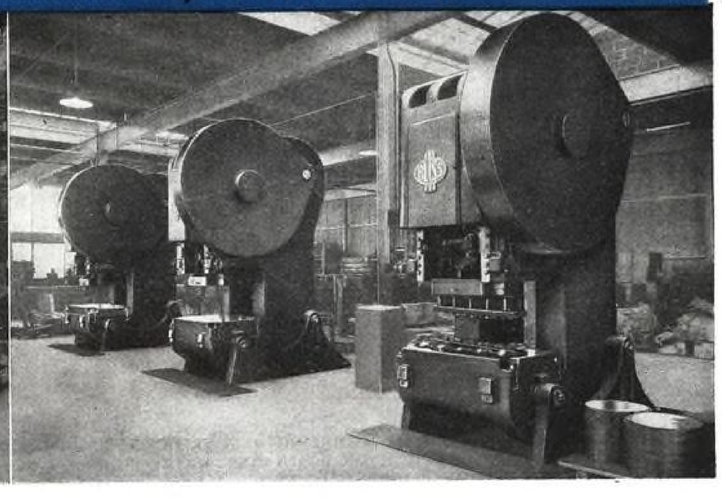

SEVERANCE CHATTERLESS COUNTERSINKS GIVE MIRROR FINISH..



If your production calls for perfectly finished seats, you simply can't beat Severance Chatterless Countersinks. In a few seconds, they produce a finish that will stand up to a commercial ground job. Using a standard type, a finish sufficiently smooth for valve seatings may be obtained. Because of their staggered tooth design, they take clean, shearing cuts — thereby eliminating chatter. Available with any angle and in a wide variety of diameters, lengths and shanks. Heavy duty types have tang shanks and may be used with a Glenzer sleeve. Write today for complete facts about how Severance Chatterless Countersinks can solve your countersinking problem.

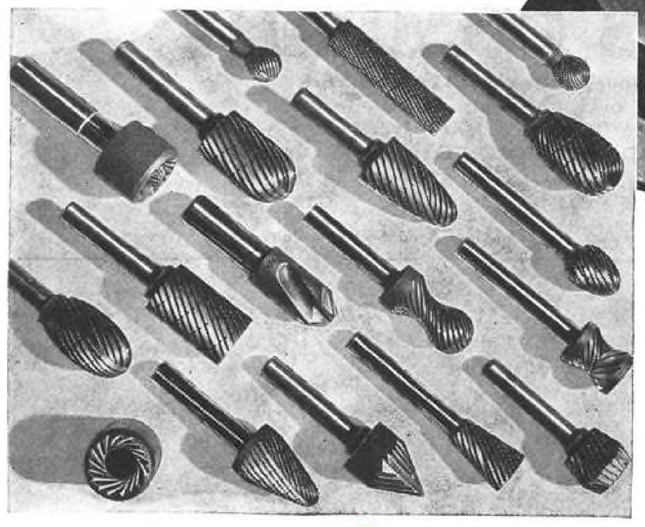

Severance Midget Milling Cutters and special cutting tools of many types are available, with Severance tooth design, for finishing every kind of wood, plastic, metal and alloy. These fast-working tools take sharp bites, throw off clean chips. For best service, order new cutters and send your worn cutters for regrinding to the nearest Severance plant.

Severance

MIDGET MILLING CUTTERS • PRECISION REGRINDING • SEVERANCE TOOL INDUSTRIES INC., SAGINAW, MICHIGAN • PLANTS IN LONG ISLAND CITY 1, NEW YORK; DETROIT 2, MICHIGAN; FORT WAYNE, INDIANA; CHICAGO 6, ILLINOIS; AND LOS ANGELES 21, CALIFORNIA. IN CANADA: 60 FRONT STREET WEST, TORONTO, ONTARIO.

for
Every Product
and any
Purpose



SCHATZ
BALL BEARINGS

STRENGTH *and* PRECISION



THE SCHATZ MANUFACTURING CO.
POUGHKEEPSIE, N. Y.

REPRESENTATIVES LOCATED AT
Detroit: 2640 Book Tower—26 • Cleveland: 402 Swetland Building—15
Chicago: 902 S. Wabash Ave.—5 • Los Angeles: 5410 Wilshire Blvd.—36



Federal's Instrument Landing System is Ready to Serve the Great New Air Age



Federal's Instrument Landing Systems are equipped with Intelin Coaxial Cable, also developed and manufactured by Federal. This cable has extreme ruggedness, strength and endurance, and meets all specifications with precision, accuracy, uniformity and dependability.

Through fog, sleet, rain and blackness the science of radio brings the airliner home.

The pilot *knows* his course, position and landing.

Federal's Instrument Landing System guides the homing pilot with unfailing accuracy. He can set his ship down on a dime.

Federal's equipment has made a great contribution to safety in the air. It is dependable and, moreover, is less subject to atmospheric disturbances. It reduces initial, maintenance and operating costs.


Federal—one of the largest manufacturers of instrument landing equipment for ground installations—is prepared now to discuss your plans and probable requirements.

Federal Telephone and Radio Corporation


AN IT&T ASSOCIATE

Newark 1, N. J.


Only MARMAN

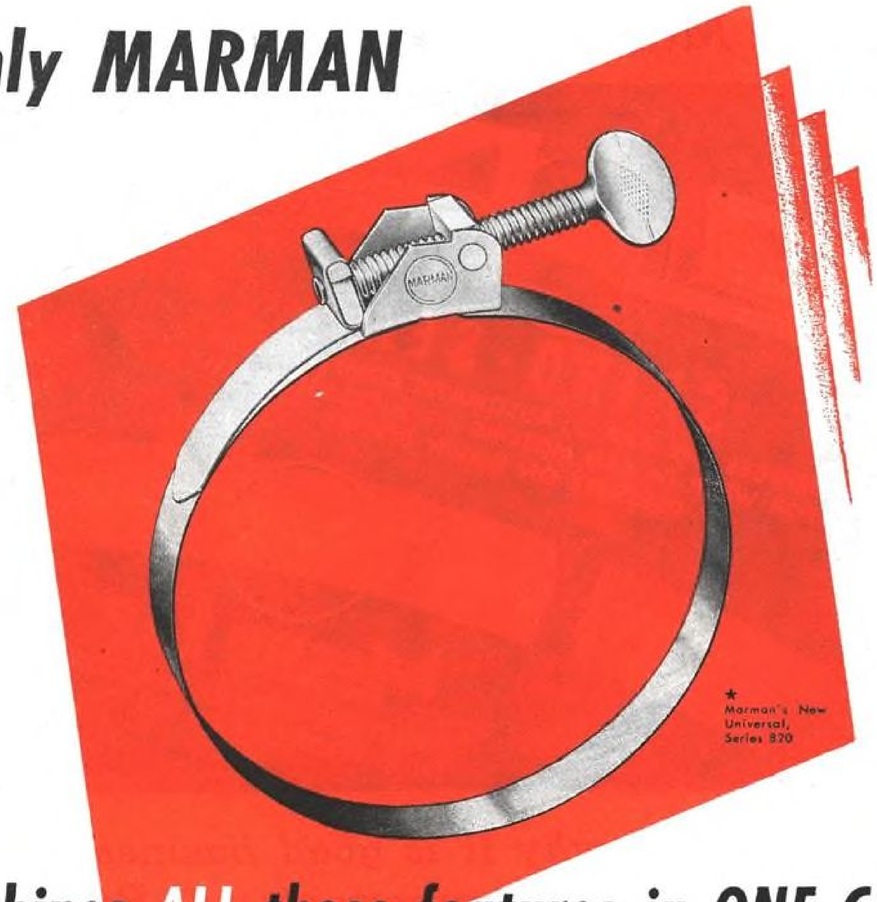

combines ALL these features in ONE Clamp!



Series 820-12. Handles AN748-22 to -38. (Fits all hose 11/16 to 1-3/16 O.D.)



Series 820-14. Handles AN748-38 to -82. (Fits all hose 1-3/16 to 2-9/16 O.D.)



Series 820-16. Handles AN748-82 to -114. (Fits all hose 2-9/16 to 3-9/16 O.D.)

1. Three sizes cover entire range of standard hose clamp sizes. (AN748-22 to -114 inclusive).
2. Band will not slip—regardless of pressure or torque setting.
3. Can be used over and over without efficiency loss.
4. Vibration proof—under all conditions.
5. Corrosion resistant—meets U. S. Navy corrosion resistance requirements.
6. Patented swivel-action nut positively locks screw and cinches band under all conditions of torque adjustment and pressure.
7. Conforms to hose contour—will not pinch or distort the parts.
8. High tensile stainless steel band and saddle with heat treated alloy steel screw.
9. Special design permits easy installation and removal without tools.

★ *Marman's new Universal Clamp passed all tests in accordance with requirements of AN-FF-C-406a hose clamp specification and has been approved by the Bureau of Aeronautics, U. S. Navy.*

For complete Engineering Data, please write for new folder "Series 820".

MARMAN PRODUCTS CO. Inc.

940 WEST REDONDO BOULEVARD
INGLEWOOD, CALIFORNIA

Two of Many Ramco Achievements



that suggest why it is good business to Check Your Ring Requirements with Ramco

Spiro-Seal is illustrative of Ramco's engineering capabilities in the field of piston ring design; *Micro-Lap,* Ramco's capabilities in the field of precision production.

Spiro-Seal is the latest of a long line of Ramco developments which date back more than twenty years, when Ramco began its pioneering of the spring inner ring principle.

Micro-Lap is a Ramco development in the field of aircraft rings which makes possible the production of rings with finishes measured in millionths of an inch with a high degree of uniformity and at a greatly increased rate of production.

Ramco products are available for your use in increasing the efficiency of stationary and vehicular engines. Ramco's engineering experience is available now to those manufacturers whose post-war plans call for the use of piston rings or products of an allied nature. Address your inquiry to General Offices, Ramsey Accessories Mfg. Corp., 3706 Forest Park Blvd., St. Louis 8, Mo. Plants at St. Louis and Fruitport, U. S. A. and Windsor, Canada.

RAMCO
Piston Rings

AIRCRAFT . . . INDUSTRIAL . . . AUTOMOTIVE

4 Reasons why HANSEN COUPLINGS are FIRST CHOICE

1 EASY TO OPERATE

Hansen couplings are extremely easy to operate, merely push plug into socket they are connected and locked, slight pull on sleeve they are unlocked. No turning or twisting to lock or unlock. Full swivel action prevents kinking of hose.

2 SAVES TIME

Hansen couplings can be operated, connected and disconnected at the operator's bench in a matter of seconds. Operator stays on the job, because he has full control at his finger tips at all times.

3 SAVES AIR

Hansen couplings handle pressures from 2 ounces to over 10,000 pounds without leaks, a big savings that runs into dollars.


4 TAKES ROUGH USAGE . . .

In most plants, couplings receive rough treatment and the average coupling is on the repair list in a short time. Hansen couplings will take the rough going because no parts are exposed, there's nothing to bend, jam or freeze.

* * *

There's a Hansen coupling made for air, oil, grease, gasoline, oxygen and acetylene. Send in for our new, free industrial catalog which shows the complete Hansen industrial line.

HANSEN MFG. CO.
1786 EAST 27th STREET • CLEVELAND 14, OHIO

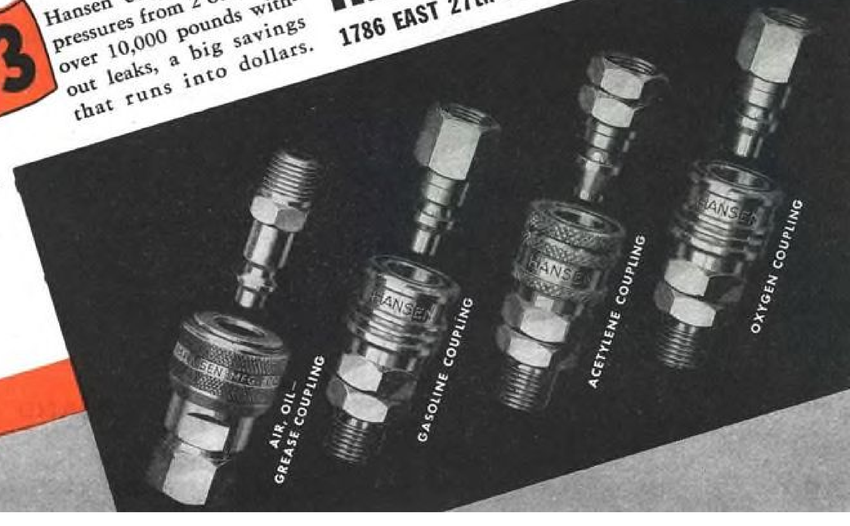

Looking for the best answer to **REPRODUCTIONS?**

REPRODUCTIONS —COMPETITIVE

DATA FOR ENGINEERING

FEATURES	PORTAGRAPH METHOD		OTHER PROCESSES			
	REMINGTON RAND	OTHERS	A	B	C	D
Confidential	YES	YES	YES	YES	NO	YES
Versatile	YES	YES	NO	NO	NO	NO
Working copies from other processes	YES	YES	NO	NO	NO	NO
Ink-like tracings from other processes	YES	YES	NO	NO	NO	NO
Good ink-like tracings from pencil tracings	YES	YES	YES	YES	NO	YES
Working paper copy from transparent tracings	YES	YES	YES	YES	NO	NO
Ink-like tracings from ink tracings	YES	YES	NO	YES	YES	YES
Complete range of sizes	YES	NO	YES	YES	YES	YES
Service and supplies in all large cities	YES	NO	NO	NO	NO	NO
Expert knowledge in *all* industrial systems and record keeping	YES	NO	NO	NO	NO	NO
All-metal models	YES	NO	NO	NO	NO	NO

Part of the explanation for the popularity of Portagraph is given in the accompanying chart of Portagraph features. *As convincing as that is*, perhaps you would still like to read what users of Portagraph say.

SHIPYARD—"Even with inexperienced help we get faster and clearer copies of drawings and instructions."

STEEL COMPANY—"We're saving four to five hours per day on revisions alone."

TOOL MANUFACTURER—"We'd be 'sunk' without Portagraph. We're getting tracings which are much clearer and brighter than our pencil originals."

In our files are scores of examples of *how* Portagraph is used to unusual advantage. A dozen special investigations have been bound together into a convenient, cross-indexed booklet. It is providing plenty of engineering departments with workable ideas for getting lots more done in less time, with fewer people. We will be glad to send you a copy. Or, get in touch with our nearest Branch Office; it is probably listed in your phone book.



SPEED - VERSATILITY - SIMPLICITY - ECONOMY

REMINGTON RAND

PORTAGRAPH
PHOTO-COPY

MODEL G-12


Vacuum Seal — Made in 30" x 40" or 40" x 60" size.
Ideal for engineering drawings, etc.

MODEL G-10
For General Office Use. Copies any record up to 9½" x 15". Requires no dark room.

MODEL G-11
For larger forms or multiple copies. 20" x 24" in size. No special skill required.

MODEL G-13
Continuous—Will handle drawings or forms up to 42" width by any length.


PHOTOGRAPHIC RECORDS DIVISION • REMINGTON RAND • BUFFALO 5, NEW YORK

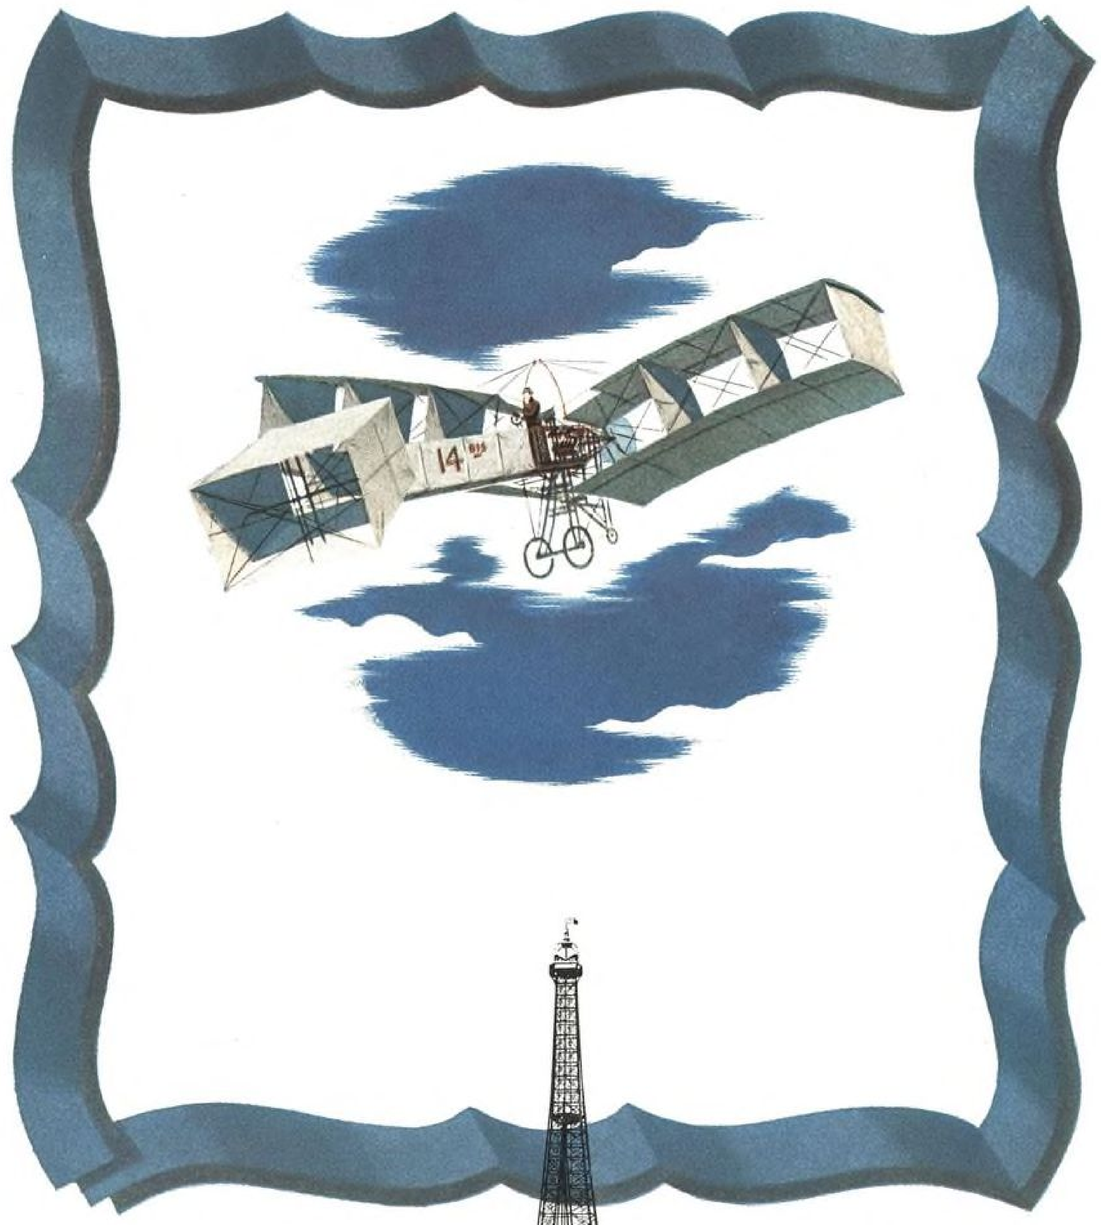

SETTING NEW STANDARDS IN AIR TRANSPORTATION

IN 1906, Santos-Dumont set new aircraft standards by flying 200 yards four times in a day, attaining a height of several feet and 23 m.p.h. without mishap.


IN 1944, the powerful new Lockheed Constellation sets new world standards in air transportation, and is proved to be the largest, fastest, highest flying land transport ever built.

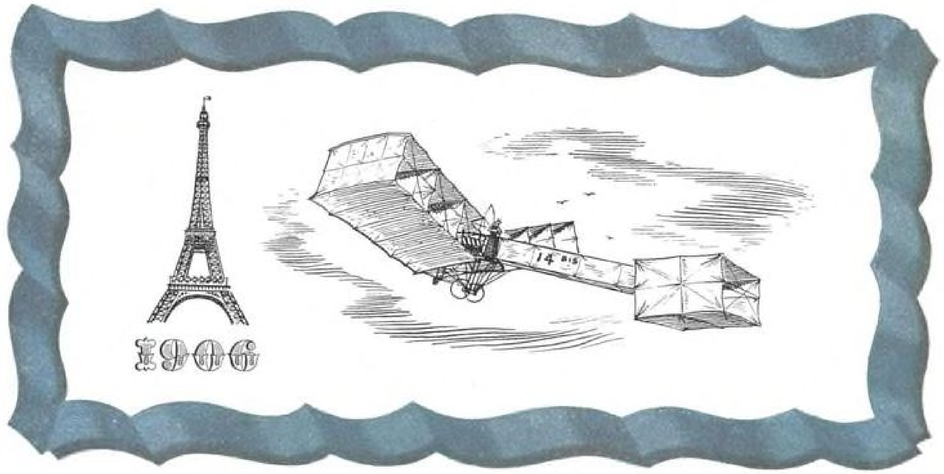

The Lockheed Constellation

HERITAGE OF PIONEERS — CHALLENGE TO TOMORROW

Santos-Dumont's gallant achievement was one of many. Year by year, since the turn of the century, longer, faster, higher flights are recorded in the history of aircraft. Today, with the performance of the Lockheed Constellation—setting new world standards in power, range, payload, and safety—the progress of flight has reached a new level. Despite its size, the Constellation easily takes off and lands on the average airport. Economywise, it surpasses the smaller transport—whether for over-ocean trips *or for flights as short as one hundred miles.* It commands the weather and terrain. It is the culmination of forty-one years of aircraft pioneering and a challenge to the designers and builders of tomorrow.

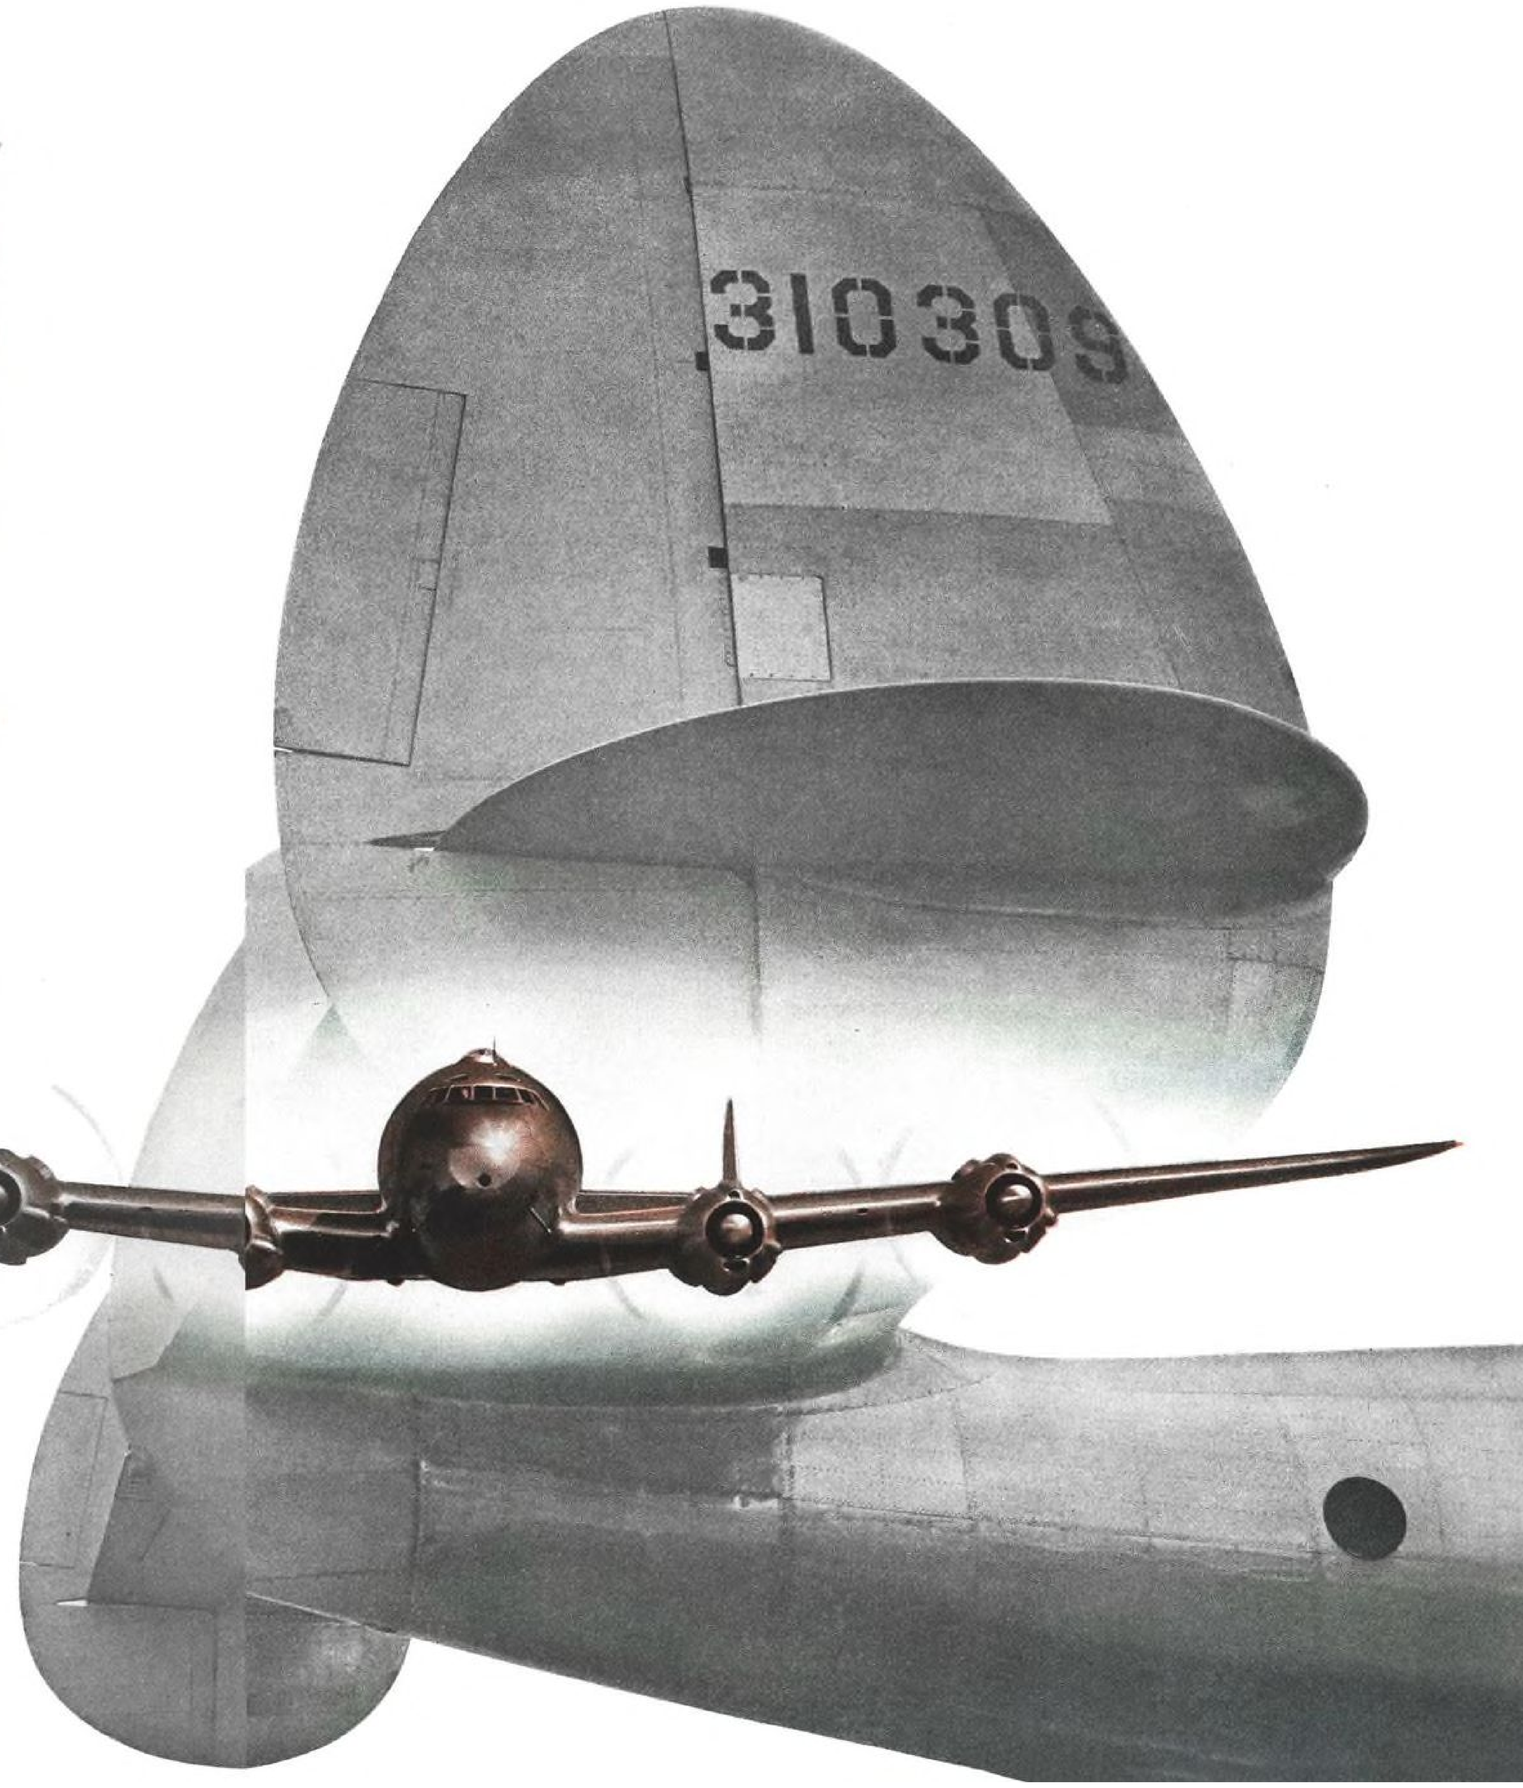

LOCKHEED LEADERSHIP SETS THESE NEW WORLD STANDARDS

Greatest rate of climb of any transport ★ Longest range of any transport ★ Biggest load-carrying capacity of any transport Highest cruising altitude of any transport ★ Fastest cruising speed of any transport ★ And these performances make the Constellation the safest of any transport.



QUESTIONS

Q. Will the Constellation be an "expensive" plane to operate?
—W. T., Portsmouth, N. H.

A. *On the contrary. Cost per ton mile on flights from one hundred to three thousand miles is less than that of the transports in service today.*

Q. Is it true that the Constellation can carry 100 troops?
—Sergt. W. T. H., Fort Ord

A. *In its military version the Constellation can carry 100 troops and their equipment.*

Q. Why does the Constellation have three tails?
—Mary W., Atlanta

A. *Big rudder surfaces are needed to control big planes. By distributing the necessary 242 sq. ft. over three equal surfaces, plane is made safer and easier to handle in ordinary-sized hangars.*

Q. What are the Constellation's dimensions? —C.W.T., Chicago

A. *Wing span 123 ft., wing area 1650 sq. ft., length 95 ft., height 23 ft. 8 in., from ground to tip of the rudder.*

Send in your questions. Address: Lockheed Aircraft Corporation, Department 69-55, Burbank, California

LOCKHEED

FOR NEW WORLD STANDARDS IN AIR TRANSPORTATION
LOOK TO *Lockheed* FOR LEADERSHIP

2 SECONDS OF ARC—TWO PARTS IN 1,296,000...



. . . or less than .0006" error on the circumference of a ten foot circle. . . . The nearest approach to perfection ever devised for checking the spacing and angular location of gear teeth, master index plate notches, splines or any other form of circular division. . . . A positive method for locating those minute errors whose accumulated total means costly adjustment and low production. . . . A rugged, sturdy inspection instrument that is an essential wherever precision production is maintained. THE VINCO MASTER INSPECTION OPTICAL DIVIDING HEAD.

Complete details furnished on request.

VINCO CORPORATION, 8865 Schaefer, Detroit 27, Mich.
SALES OFFICES: NEW YORK, CHICAGO, CLEVELAND

MILLIONTHS OF AN INCH FOR SALE BY VINCO

Semi-Automatic Hydraulic Spline and Gear Grinder • Optical Master Inspection Dividing Head • Involute Checker • Angle Tangent to Radius Dresser • Index Plates • Precision Vises • Sine Bars • Straight-side Spline, Serration Spline, Involute Spline and Helical Spline Plug and Ring Gages • Thread Plugs, Rings and Setting Plug Gages • Spur and Helical Master Gears • Munition Gages • Propeller Hub Gages • Built-up and Special Gages • Gear Rolling Fixtures • Spline and Index Fixtures • Hydraulic Power, Control, Utilization and Distribution Units • Engineering, Design and Development.

IMPROVED FORMULATION FOR HEAT-RESISTANT "LUCITE" (METHYL

Offers you heat-resistance,



DIRECTIONAL INDICATOR: Support plate (1), originally machined from a block of "Lucite," is now injection molded of HM-122 powder. Dial cover (2) also is molded of this new formulation. Among the advantages considered when "Lucite" was selected for these parts were the speed of production, the reduction in weight of the instrument, the interchangeability of unit parts, and the fact that the cost of the plastic unit is less than half the estimated cost of the metal parts originally considered.




MOLDING POWDER

METHACRYLATE RESIN—HM-122)

greater clarity, optical improvement

THIS NEW heat-resistant molding powder, which is an improved formulation, provides heat-resistance 30 to 40° F. higher than ordinary acrylic molding powders. It has already been used on a wide variety of war-time products, ranging from a lighting guide on an air-borne sextant to parts of an Army tank directional indicator. It is not intended to replace general-purpose "Lucite," except where heat-resistance is a major factor. So extensive are the possibilities of application, it promises to widen the field of use of acrylics in the post-war period. Available in a large variety of colors.

SPECIAL PROPERTIES:

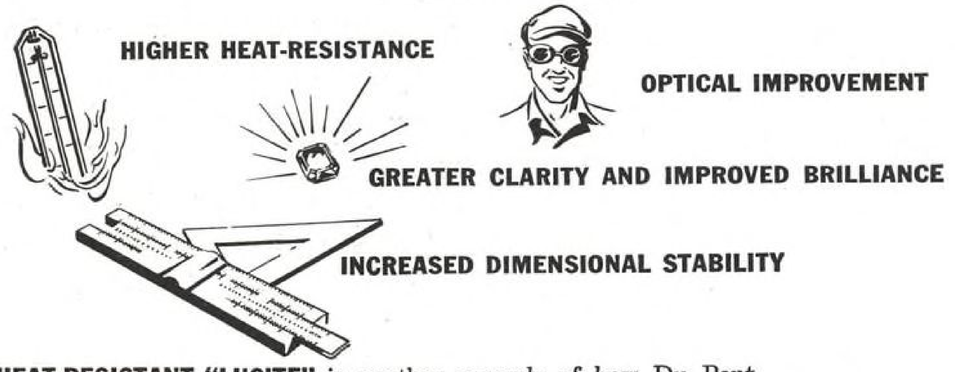

HEAT-RESISTANT "LUCITE" is another example of how Du Pont technicians are helping the plastics industry to produce better molded pieces more quickly, at less cost—and how they are helping to supply actual users with improved materials to meet their broadening requirements.

WRITE for free booklet giving comparison of optical, mechanical, electrical and molding properties of formulation HM-122 and general purpose "Lucite." Address: E. I. du Pont de Nemours & Co. (Inc.), Plastics Department, Arlington, N. J., or 5801 S. Broadway, Los Angeles 3, Calif. In Canada: Canadian Industries, Ltd., Box 10, Montreal.



Great stars and great radio plays make great entertainment—tune in "Cavalcade of America"—NBC network—every Monday evening.

DU PONT PLASTICS

BETTER THINGS FOR BETTER LIVING . . . *THROUGH CHEMISTRY*



Light Landings for TREMENDOUS TONNAGE

Hurtling 11,500 miles in 84 hours, Pan American World Airways' "Cannonball" express rushes "hot" priority cargo to the orient. The thundering planes swoop down by the Amazon, span the Atlantic to the Gold Coast, land again by the Nile, dip onto Arabian sands, and complete their flight in India.

At each hurried stop, Aerols* soak up landing shock, help the plane come in safely, and protect vital cargo. Thus, Aerols contribute substantially to the success of the fastest express service in history.

THE CLEVELAND PNEUMATIC TOOL CO.
"PIONEERS FOR 50 YEARS"
AIRCRAFT DIVISION • • CLEVELAND 5, OHIO
Also manufacturers of Cleco pneumatic tools, Cle-Air shock absorbers for vehicles, and Cleveland rock drills for mining and construction.

Speed Victory! Buy MORE War Bonds and Stamps

TO ALL MANUFACTURERS OF NAVAL AIRCRAFT

The Navy Orders

Paragraph D-6g of Navy Process Specification SR-70d, Amendment 4 makes rot-proofing of Naval Aircraft fabric mandatory

THIS NEW ORDER requires the addition of a specified amount of Zinc Naphthenate to standard AN-D-1 Dope, which involves careful measurements and usually special mixing equipment in contractors' dope rooms.

An excess of Zinc Naphthenate is apt to affect the tautening properties of the dope and the adhesion of the overlying topcoats. Thus, exact calculations are necessary when making allowances for thinning the dope to the specified consistency for application.

Roxalin Delivers C.A.B. Fungicidal Brushing Primer No. 3350*

THIS ROXALIN-ENGINEERED, ready-mixed AN-D-1 Dope helps naval aircraft manufacturers avoid these dangers—makes easier their job of fulfilling this new specification.

C.A.B. Primer No. 3350 contains the exact amount of Zinc Naphthenate, the mixture adjusted to the correct viscosity for brush application, i.e., 2 poises absolute.

Contractors can thus eliminate measuring and mixing operations and prevent the chance of error in arriving at the specified mixture in their plants.


What's more, a color indicator in Roxalin C.A.B. Primer No. 3350 shows that the specified process has been followed.

This product of Roxalin engineering has been developed and is made available to you with the approval of the Bureau of Aeronautics. Write for detailed information.

ROXALIN *Flexible* FINISHES
INCORPORATED
ELIZABETH, N. J. • NEW JERSEY

*Roxalin U. S. Patent 2,330,998.

WATCH ROXALIN IN AVIATION

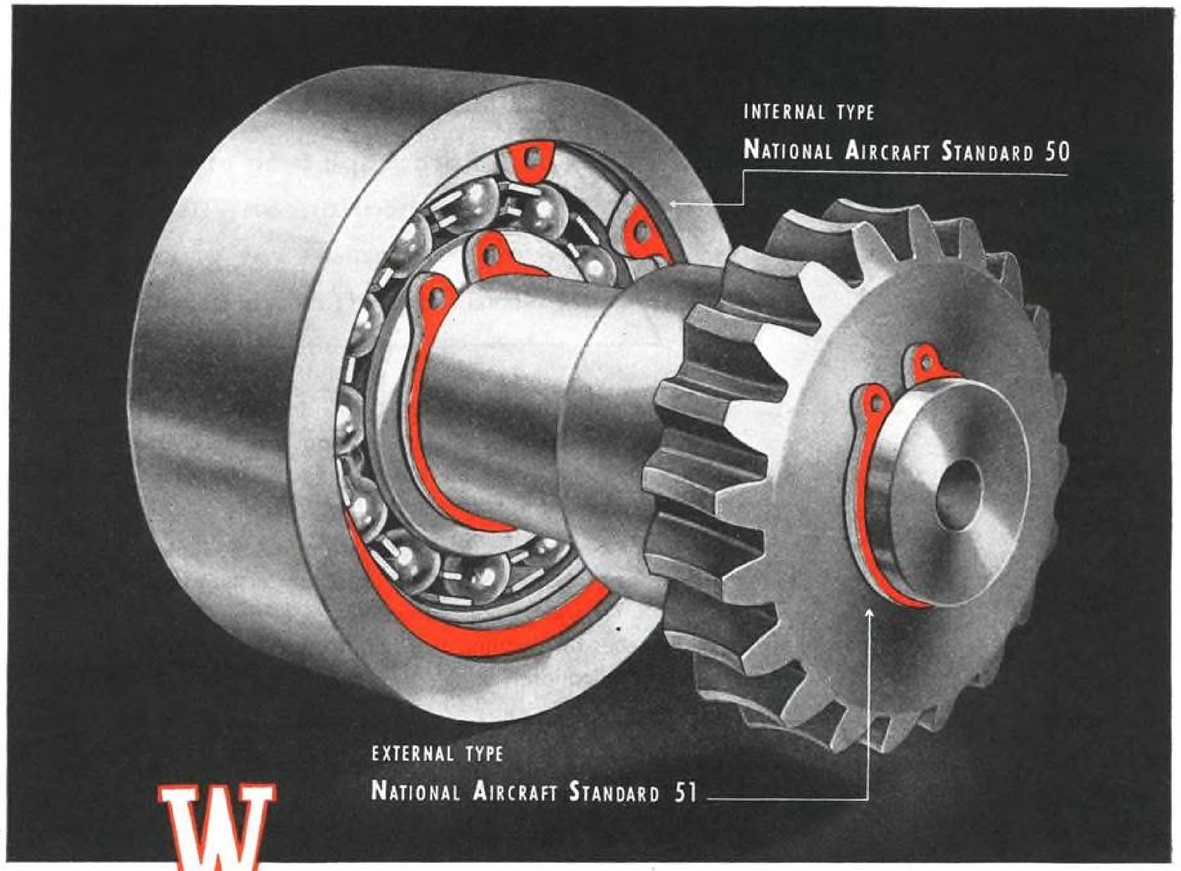

Waldes Truarc presents a significant advance in retaining rings.

It spreads or contracts without distortion; always retaining its perfectly fitting circular contour.

For thrust-load fixing, and shaft and housing applications, Waldes Truarc provides distinct advantages over nuts and bolts or wedges and washers . . . it reduces dimension and weight . . . saves material . . . cuts manufacturing time . . . simplifies assembly and dis-assembly. On request, we will gladly furnish samples and full data for your tests.

WALDES

TRUARC



RETAINING RING

U. S. Pat. Re. 18,144
Sole Manufacturers in U. S. A.

WALDES KOH-I-NOOR-INC. — **LONG ISLAND CITY-N.Y.**

CANADIAN REPRESENTATIVE: Preco Progress & Engineering Corp., Ltd., 72-74 Stafford St., Toronto

THE BRAKE DOKTER CAN HANDLE THE TOUGH JOBS!

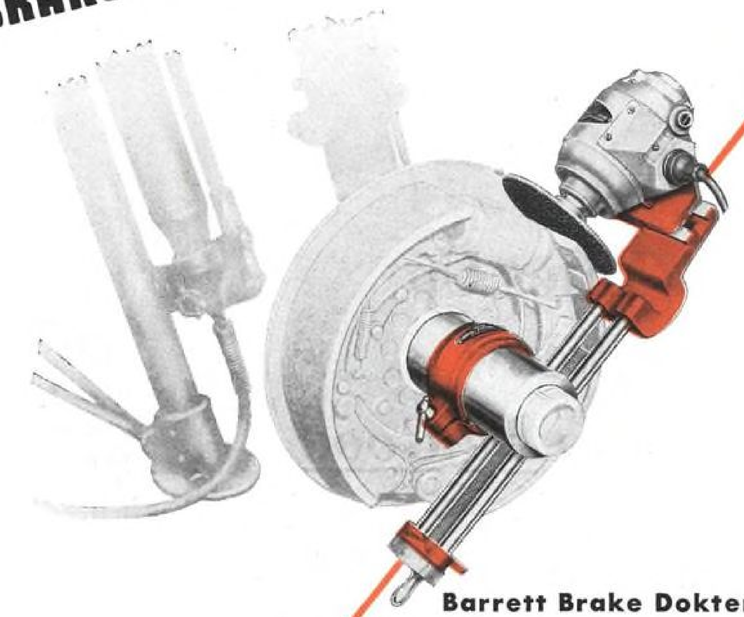


Illustration shows B-117-1 Aircraft Brake Dokter mounted and ready for use at Patterson Field.

Barrett Brake Dokter Makes Aircraft Precision Relining Easy and Economical

The Barrett Brake Dokter, used in aircraft maintenance shops everywhere, is providing dependable, vital brake service for the heaviest to the lightest planes quickly, easily and at less cost than ever before.

Any aviation mechanic can turn out faultless work with the Brake Dokter. Simple to use, light in weight, this famous precision machine centralizes and adjusts brakes right on the plane in the field cutting maintenance cost and time to a minimum. Correcting misalignment and distortion, tailoring each shoe for exact and perfect drum contact, the Brake Dokter eliminates every hazard arising from faulty brakes.

The Brake Dokter is recommended and used by leading airlines, car and truck makers, fleet operators and the Army and Navy throughout the world. Famous for precision service, Brake Dokters are available to essential users immediately.

The Brake Dokter is an essential and profitable investment for every aircraft maintenance shop. Send today for complete information. No obligation!

BARRETT EQUIPMENT CO.

The World's Finest Brake Service Equipment

CASS AVENUE AT TWENTY-FIRST ST. • ST. LOUIS 6, MO.

BARRETT EQUIPMENT CO.
Cass Ave. at 21st St., St. Louis 6, Mo.
Please send catalog and complete information on Barrett Brake Service Equipment.
Company.....
Address.....
.....
.....



At Seven Miles Up and 60° Below

Contacts Have to Be Good

Up, up a little bit higher—that's the trend in combat flying. And up with the trend goes Mallory skill—the capacity to build *better* as the air ceiling rises.

Recently the aptitude of a manufacturer of magnetos was tested by a new high in aircraft requirements. The specifications demanded among other things, electrical contacts that would function perfectly at an altitude of 35,000 feet, and at a temperature of 60° below. Moreover, the contact assembly arm had to be molded into a plastic housing, thereby necessitating a high quality finish.


Military secrecy shrouds the full problem, but when Mallory engineering help was sought, it quickly came through with the answer. As it happened, the solution called for skillful workmanship on tungsten contact assemblies, and tungsten contacts are one of Mallory's specialties!

Yes, at seven miles up, contacts have to be *good;* and they were better than that the way Mallory made them. If you too are faced with unusual contact requirements, we invite you to bring your troubles to these same engineers who make it a business to solve tough problems.

Serve Your Nation, Save for Yourself —Buy War Bonds!

ARMY E NAVY

P. R. MALLORY & CO., Inc., INDIANAPOLIS 6, INDIANA

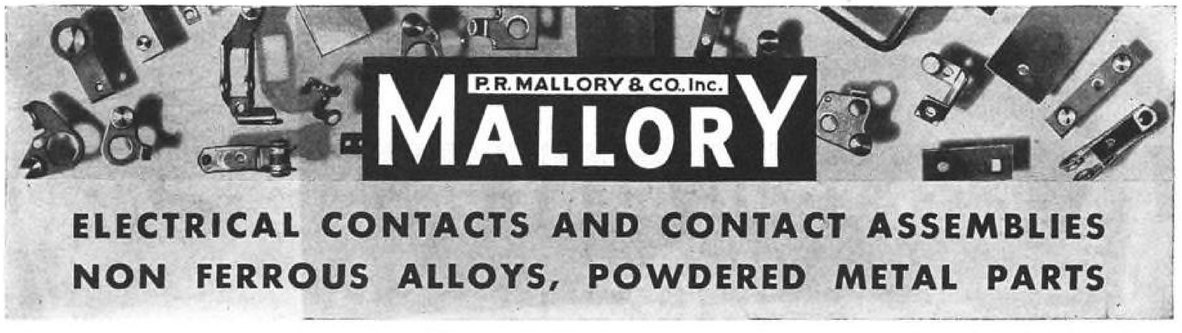

ELECTRICAL CONTACTS AND CONTACT ASSEMBLIES
NON FERROUS ALLOYS, POWDERED METAL PARTS

3 WORK-SPEEDING FEATURES

make the "Hornet" tops in portable DC welders




1 SIMPLE 'GLOVE-GRIP' CURRENT CONTROL



All current regulation over the "Hornet's" wide welding range is centralized in one convenient, easy-grip hand wheel. Accurately calibrated dial covers "high" and" low" ranges for infinite current settings.

2 FOOL-PROOF POLARITY CONTROL



Only by flicking this switch can polarity be changed from straight to reversed, or vice versa. Accidental polarity reversal is impossible on the "Hornet".

3 FAST RECOVERY, SELF-CONTAINED EXCITER



Extremely fast recovery far exceeding Navy requirements. Simplest, most efficient means of self-excitation is employed on the "Hornet". This close-up shows rectifier and starter.

FAMOUS FOR ITS *Penetrating "Stinger"*

AND THESE OTHER IMPORTANT FEATURES

Throughout industry many important features of the "Hornet" have made it a widespread choice among operators. With its deep penetrating arc and excellent arc characteristics, it has earned the title—"the machine that makes the arc behave". • It starts easily... quickly • has "split-second" recovery • no sticking or "pop-outs" • and has unusually low spatter loss. • It's streamlined in design and easily portable. • All "live" parts are completely shielded.

The "Hornet" is made in 200, 300, and 400 ampere sizes. For complete details call or write any Air Reduction office, or mail coupon for illustrated catalog.

★ BUY UNITED STATES WAR BONDS ★

Send for Free Catalog



AIRCO WILSON

AIR REDUCTION

General Offices: 60 East 42nd Street, New York 17, N. Y.
In Texas: Magnolia Airco Gas Products Co. General Offices: Houston 1, Tex.
Offices in all Principal Cities

A Air Reduction
60 E. 42nd Street
New York 17, N.Y.

Please send me a free copy of the Wilson "Hornet" Catalog.

Name.....

Company.....

Address.....

City..... State.....

Two miles up - with an ear to the ground



Keeping posted high in the air is one secret of successful flying. The ground keeps track of the plane. The plane knows the weather, the course, and what it's like at the field.

Lear was among the very first to make aircraft radios — had gained an enviable reputation for fine radio and navigation instruments long before the war — was ready when war needs demanded greater and greater technical development.

Some of these developments can't even be mentioned now. They're too secret. Some are in the field of electric aircraft controls. Some will have no use outside of war.

But there are others that hold vast promise for everyone when peace returns.

With its war job done, Lear will turn its discoveries, its developments, the resources of its laboratories and plants toward adding new comforts, new conveniences, new pleasures to the lives of America's families.

PLANTS: Piqua, O., and Grand Rapids, Mich. BRANCHES AT: New York, Los Angeles, Chicago, Detroit, Cleveland.

LEAR INCORPORATED
PIQUA · OHIO

Formerly Lear Avia, Inc.



"THERE ISN'T A COMBAT JOB IN THE AIR *That the* LIGHTNING DON'T KNOW, NOR DO!"





As versatile as the marines regarding whom Kipling wrote in the above vein, as well as ranking among the fastest of fighter planes, the Lightning has done everything from high altitude fighting, photo reconnaissance and bomber escort to ground strafing and bombing.

It was the first fighter plane to fly the Atlantic. The powerful twin motors, which give it a great speed, also enable the Lightning to carry bomb loads for wrecking ground installations. Its contra-rotating propellers — eliminating torque — and especially designed combat flaps give it exceptional maneuverability for a plane of its size and weight.

The Lightning and its airframe are subjected to unusually severe tensional, torsional and compression stresses. The greatest possible staunchness is imparted to the Lightning and other outstanding planes by the liberal use of steel at its ultimate strength — super-tough drop forgings supplied by Kropp. In endless shifts our plant is turning out a huge volume of airframe drop forgings exclusively.

The inquiries of plane and engine builders for forgings of all types are solicited.

ARMY E NAVY

Member of the A.C.C.A.

Kropp Forge Aviation Co.

5301 W. ROOSEVELT ROAD CHICAGO

Engineering Representatives in Principal Cities


Why "NIBBLE" Templates?



Do ALL
MAKES THEM FASTER and SMOOTHER

The Nibbler has no work table. Job must be carefully guided by hand. Finished edges are rough. Much material is reduced to waste chips. Work thickness is limited to thin plate stocks.

The DoALL's thin cutting blade follows layout lines accurately. Edges are smooth and straight. No metal is wasted. DoALL takes work a foot thick, or you can cut 100 or more shapes at one time from stacked sheets.

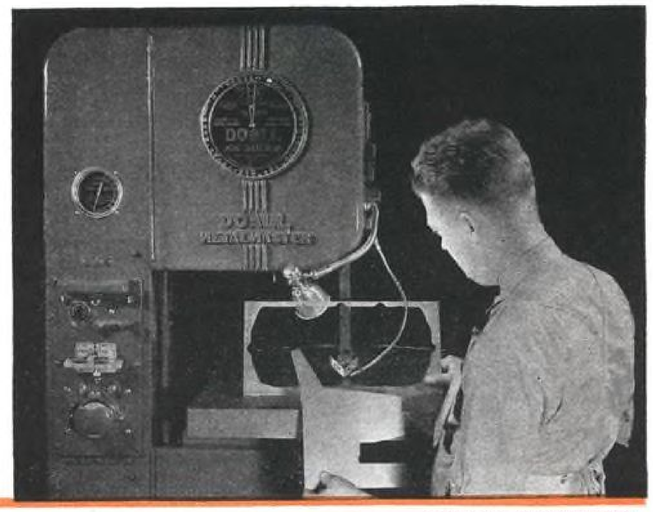

The DoALL has cut its way through millions of feet of metals, alloys, plastics, laminates, plywood and composition materials that have gone into war production work.

The DoALL laughs at former cutting records by doing internal and external sawing in 1/4 to 1/10 the time of other methods.

If there is one machine tool that deserves your attention now and after the war, it's the DoALL.


The circular DoALL ADVANTAGES tells a graphic, time-saving story. Send for copy.



DoALL INDUSTRY'S NEW SET OF TOOLS

CONTINENTAL MACHINES, INC.
1305 So. Washington Avenue • Minneapolis 4, Minn.

Sales & Service Offices: Baltimore, Birmingham, Boston, Chicago, Cincinnati, Cleveland, Denver, Detroit, Erie, Grand Rapids, Hartford, Houston, Indianapolis, Los Angeles, Milwaukee, Minneapolis, New York, Orlando, Philadelphia, Pittsburgh, Providence, Rochester, Rockford, St. Louis, San Francisco, Seattle, Toledo, Tulsa.

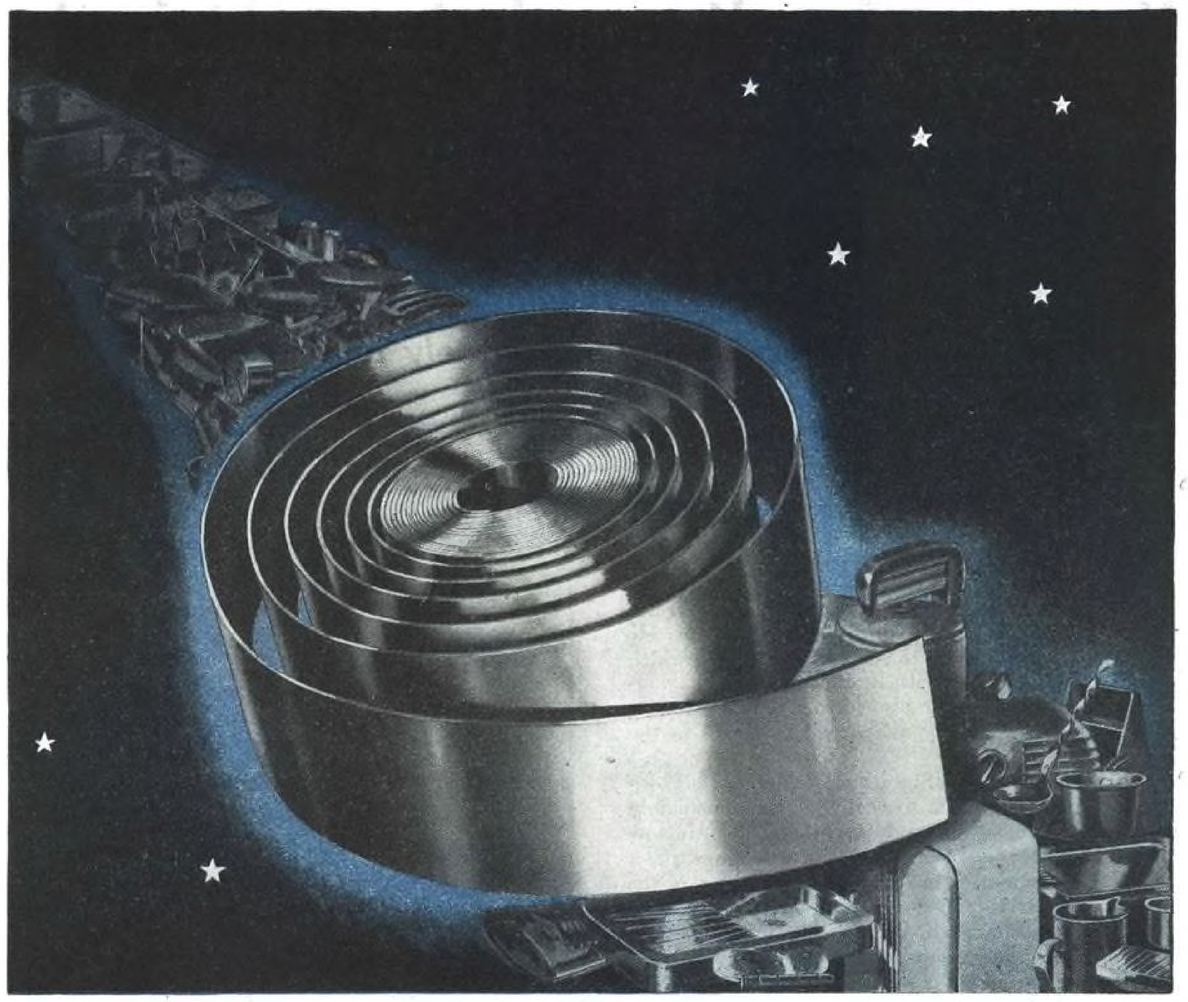

For the infinite uses of Stainless—

Superior's STAINLESS STEEL Strip

Take mental stock of your post-war metal products . . . and pause a moment, to review the many points at which Stainless Steel could add vital sales appeal: the beauty of undimming luster, the practical values of strength, resistance to wear and corrosion, long life. Consider then the prime production advantages of Superior's Stainless Steel Strip . . . long coils of ever-bright metal, in specified analyses, thicknesses and widths, ready for your fabricating line. Like to know more about this product in relation to your projected applications? Ask us—we're strip steel specialists!

Superior Steel
CORPORATION
CARNEGIE • PENNSYLVANIA

How one aircraft manufacturer obtained fast, accurate production flow tests!


A production bottle-neck was broken when instantaneous flow readings of hydraulic pump capacities were accurately obtained.



A manufacturer of hydraulic pumps for aircraft was laboriously testing the capacity of his finished pumps by means of weigh tanks because every flow meter that he knew about showed an unallowable error when the viscosity of his hydraulic test oil changed. Then he visited a large AAF air base and saw them using a Stabl-Vis rotameter for checking hydraulic pumps. He was amazed to see the speed with which pumps could be tested with it, and was really galvanized into action when he also learned that the meter was immune to viscosity and density changes in the Servo oil being used.

He arranged to test a Stabl-Vis rotameter in his own Plant, and it performed so well that he immediately equipped all of his test stands with this meter. He now obtains *instantaneous*, accurate flow rate readings, and a production bottle-neck has been broken because of the time saved in testing his finished product.

He later used the Stabl-Vis meter to do the research work on a new and vastly improved pump. The completeness and accuracy of his performance data helped him to accomplish his development work quickly and to get prompt acceptance of his new unit.

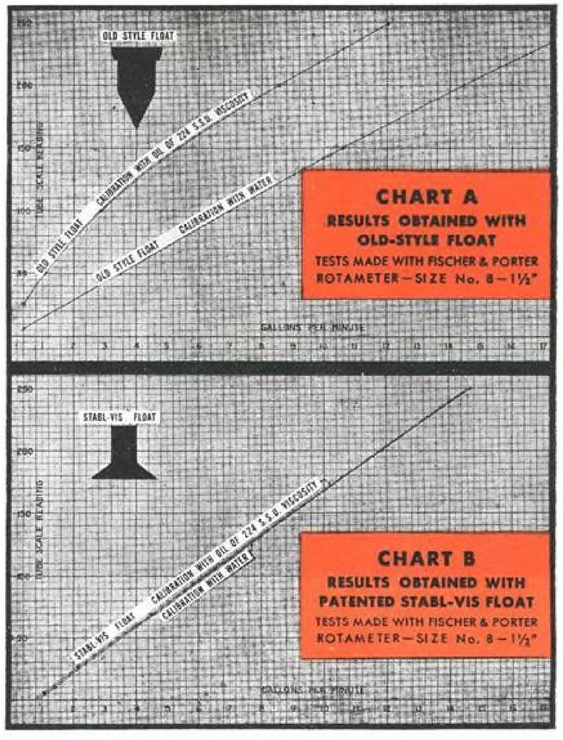

How the Stabl-Vis Operates




The Stabl-Vis rotameter is an area-type meter, using a precision tapered tube and free-moving float. The patented Stabl-Vis float has a scientific shape, designed to change sinuous flow to turbulent flow, with the result that viscous drag on the float body is overcome. It can also be made of materials that cause it to compensate for changes in fluid density. The sketches show the sinuous flow obtained with the old style plumb-bob float and the turbulent flow given by the Stabl-Vis float. The curves in Chart A show that the old style plumb-bob float introduces a calibration error of over 30% in going from water to oil of only 224 S.S.U. With the Stabl-Vis float, the curves for these two fluids are *identical*, proving that the change in viscosity has not affected the Stabl-Vis calibration.

Because of this remarkable characteristic, there are now thousands of Stabl-Vis meters in daily use, installed in aircraft manufacturing plants all over the world. They have been used to measure every conceivable fluid for aircraft services, including gasoline, diesel fuel, kerosene, "lube" oils, hydraulic fluids, coolants, oxygen, air, nitrogen, welding gases, inert atmospheres for heat treating furnaces, de-icer fluid, freon, water injection, blow-by gases, etc. The Stabl-Vis rotameter is obtainable as a direct or remote reading meter for use on the ground or in the plane. It may be flow rate indicating or recording or recording automatic-controlling. Integrators to give total flow are also available.

The Stabl-Vis rotameter theory is completely and interestingly told in our technical bulletin 98-Y. The various types of Stabl-Vis meters made especially for aircraft are described and well illustrated in bulletin 63-G. Aircraft engineers are welcome to these two catalogs without obligation — please write on your Company letterhead. Fischer & Porter Co., 311 County Line Road, Hatboro, Pa.




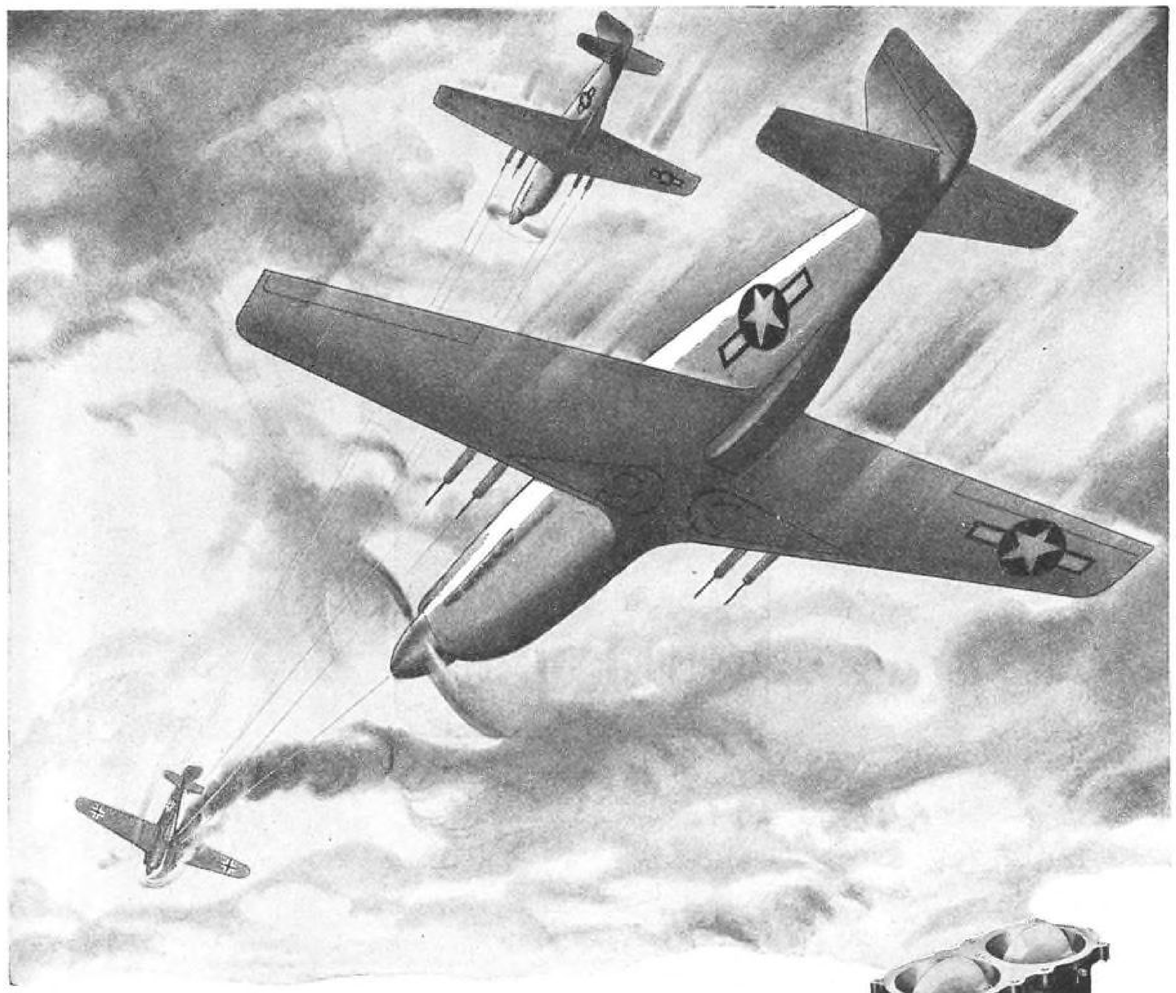

Stromberg Injection Carburetion

***"Raises the Roof"* of fighter efficiency**

A Stromberg Injection Carburetor is standard equipment in the fastest and highest climbing fighter in existence for this excellent reason: The Stromberg Injection Carburetor automatically and instantly compensates for changes in altitude, position, temperature and speed. *The gas mixture is always right for all flying conditions.* And keeping our pilots on top is only one of its advantages. It has notably increased flight range as well. This ability to get more miles from a given fuel load will naturally make these Bendix-built and designed carburetors vastly important to the cargo planes of the future.



FOR TOP-FLIGHT PERFORMANCE

The Stromberg Injection Carburetor has considerably increased the *ceiling* as well as the range of fighting and bombing planes. And Bendix—with the finest research facilities in its field—continues to make improvements. Watch Bendix for the latest advancements in Injection Carburetion.

Bendix **PRODUCTS DIVISION**

Bendix Aviation Corporation, South Bend 20, Indiana

RUSSIA

Threat . . . or Promise?

WHEN this war is ended, two nations—the United States and Russia—will possess the bulk of the world's military and industrial might.

Whether this new situation will hold seeds of catastrophe or of unprecedented opportunity will be determined by policies . . . still to be formulated.

If this concentration of power leads to a bitter struggle for supremacy, then the world will be turned into a giant munitions factory.

If it is used cooperatively to maintain order, then, I believe, the stage is set for a long era of prosperity . . . and peace.

It is time that Americans, whether of the Right or the Left, face this basic issue squarely and open-mindedly.

☆ ☆ ☆

No group in this country has a greater stake than have business and industry in seeing that a satisfactory Russian-American understanding is reached.

Without such an understanding there can be no reasonable hope for more than a temporary and insignificant reduction of our crushing wartime tax burden. If the threat of a clash between these two giants impends, neither bankers nor governments will run the risk of lending on a scale adequate to maintain international trade at levels necessary for our future prosperity. Potential international customers, instead of buying freely in open world markets, will be forced—as during the dangerous period introduced by Hitler in the early 1930's—into the trading camp of whichever power they fear most.

If, however, Moscow and Washington will agree on cooperative plans for maintaining the peace, American business will enjoy enormous new trade opportunities after the war.

☆ ☆ ☆

Russia, during the three and one-half years since it was attacked by Hitler, has conclusively proved to a doubting world that it is a top-flight military power.

Soviet railroads did not break down under the strain of war.

Regions accounting for nearly 70 per cent of Stalin's key industries were engulfed by the invading Nazis, but before they fell, Soviet management engineers performed a near miracle by transplanting entire industries a thousand miles to the Urals with the loss of as little as four months' production in many cases.

Though American planes, trucks, and medical supplies have been welcomed by Moscow, fairness demands the admission that more than 98 per cent of American production has *not* gone to the Russian front.

Russian planning and *Russian* equipment won the victories of Leningrad, Stalingrad, and the Caucasus.

☆ ☆ ☆

But these measures of Soviet military strength—indicative as they are of an unsuspected economic development—fail to picture in adequate detail the startling potential of the Russian market after the war.

Russia, for instance, has two and one-half times the area of the United States.

It has a population of nearly 200,000,000, and this is increasing at the rate of 2,500,000 a year.

And statistics just released show that Russia has three times as many youngsters under 16 as has the United States. This is a measure both of war potential and of a vast commercial market.

And remember that in no part of the world before the war was per capita production rising as rapidly as in the Soviet Union.

☆ ☆ ☆

German armies occupied a region in Russia roughly equivalent to the territory in the United States north of Richmond, Virginia, and east of the Mississippi.

This huge area—with its counterparts of Pittsburgh, Buffalo, and Bridgeport; of Illinois corn fields, New York dairy farms, and Maine potato harvests—was *twice* subjected to the most withering destruction; first by the Russians themselves when they retreated before the Germans, and then by the Germans when they withdrew before the victorious Russians.

As a result, 30,000,000 people are in urgent need of complete reoutfitting. They need houses and shoe laces, trolley cars and baby carriages, tractors and livestock, hydroelectric plants and electric light bulbs.

Many of these needs will be met at home. It is doubtful, for instance, if Moscow will import cooking utensils or sewing machines, for many of Russia's huge war factories can quickly be converted to peacetime production of such consumer goods.

But for the rebuilding and expansion of her industries Russia looks to the United States for equipment.

Soviet representatives already are in this country with authority to negotiate for technical men and the equipment necessary to rebuild the great Donbas coal mines according to the most modern American methods.

It is important to remember that Russia's whole iron and steel industry, its non-ferrous mining and processing, some of its chemical production, much of its coke roasting and gas recovery, practically its entire automobile and tractor industry, and the largest of its hydroelectric plants, are based on American machinery and processes.

It is known among manufacturers that Russia recently has asked for bids on shipbuilding equipment, construction and roadbuilding machinery, alloy steels, textile machines, plastics, and a long list of rail, air, and water transport supplies.

☆ ☆ ☆

The Soviet Union, however, has more than a rehabilitation job on its drawing boards.

The first Five-Year Plan, which, as we all remember, was completed ahead of time in 1932, was devoted almost exclusively to heavy industry. Russia set out to build for itself the machines and the factories which, in later years, could turn out, at home, modern equipment for a vast range of light industries.

Stalin, when he inaugurated the second of his famous Five-Year Plans, promised that before it was completed Soviet factories would begin to turn out a flow of con-

sumer goods—ready-made dresses, canned foods, soap, cosmetics, shoes, kitchenware, automobiles, telephones, and modern houses.

But, by 1935, Moscow realized that Russia could not afford to enjoy such luxuries in the face of growing political tension in Europe. So, when the third Five-Year Plan was launched, there was no fanfare. Russians continued to wear their old clothes, to eat whatever simple food was available, and began grimly to build the industries which ultimately produced enough tanks, planes, and guns to turn the tide of battle at Stalingrad.

It is characteristic of Moscow that even before the last battles with the Nazis are over, Russia is planning to pick up its Five-Year Plans where the war had interrupted them.

Invitations to participate in a permanent exhibition in Moscow already have been mailed to American manufacturers. Soviet officials want their public to see samples of our new machine tools, aluminum and alloy products, oil-drilling machinery, bulldozers, and prefabricated kitchen equipment. Russia already is projecting specific plans to resume the job (1) of making the country an industrial giant comparable to the United States, and (2) of making life more pleasant for a long-suffering people.

☆ ☆ ☆

What is the measure of this postwar market in the Soviet Union?

Some estimates place the total quantity of goods which Russia might take from the United States during the first two or three years after the war as high as $5,000,000,000 a year. Then, as Russian industry is restored, imports from the United States might taper off perhaps to $2,000,000,000 a year.

Actually, these estimates are far too optimistic, unless the United States is prepared (1) to help Russia pay by buying vast quantities of Soviet raw materials, and (2) to provide large credits to handle the purchases during the first few years of rehabilitation.

The relations of American exporters with Russia during the period covered by the three Five-Year Plans have been eminently satisfactory. Moscow has met all of its obligations punctually; fifteen years of experience have reduced contract forms to the point where they cause a minimum of misunderstanding between the Russian representatives and the American producers; individual American companies with extensive prewar experience in handling Soviet business already are offering large credits on initial postwar orders though these may yet be replaced by large government credits at lower interest rates.

But the volume of trade with Russia after the war hinges upon Moscow's ability to pay. Never before the war did the United States buy more than $30,000,000 of goods a year from Russia. As late as 1938, Soviet exports to this country amounted to as little as $23,500,000, far less than enough to pay even the service charges on the credits which would have to be extended in connection with exports of several billion dollars a year. Only South Africa produces more new gold each year than the Soviet Union. But the United States does not want gold; more of it would only complicate the problem of controlling prices here.

If the United States, however, is to achieve, after the war, the high level of national income which is necessary (1) to keep our expanded factories in operation, and (2) to service the national debt, it might absorb from $90,000,000 to $100,000,000 a year of the kind of goods bought from Russia before the war—furs, timber, manganese, chromium, and handicrafts. But unless this volume of purchases from Russia can be boosted by another $50,000,000 annually, credits of the size necessary to fill immediate Russian needs could not be serviced without large supplemental importations of undesirable gold.

The nub of the situation is that Russia offers an extraordinary potential market particularly for our heavy industries which have grown so enormously during the war. But if this sales outlet is to materialize, then the United States must find a way to import from Russia (or from Russia's debtors if any) from ten to twenty times as much as we did before the war. Instead of merely going after the export business, American businessmen must explore with the Russians the possibility of buying bigger supplies of Soviet products.

☆ ☆ ☆

But more than the Russian market itself hinges upon sound cooperative action by the world's two leading military-industrial nations.

If trade between them is held to a minimum and if relations are strained, the flow of trade all over the world will be adversely affected.

Europe, long this country's biggest export outlet, certainly will never take the bold steps necessary to reconstitute its economy on a peacetime basis if Russia and the United States drift into a race for military supremacy.

The Balkan states, which may be industrialized by Moscow in order to reduce their dependence on Germany, and the Arab world with its huge need for transportation, irrigation, and sanitation, will not dare accept American credits or make big contracts with American engineers if Moscow frowns on the deals.

And refusal of Russia and the United States to work cooperatively to maintain the peace would kill, in their present embryonic stage, all dreams of a vast industrialization program for China.

☆ ☆ ☆

The opportunity to make a major change in the trade map of the world and at the same time to achieve a sharp rise in our own standard of living is before us.

It demands of American business leaders the kind of boldness and imagination that their predecessors displayed when they pioneered this country's unknown West.

It demands realistic action by men who know that the solution to this country's *real* foreign trade problem under today's conditions lies in boosting *imports* not exports alone . . . men who are not afraid of being paid for what they sell.

It calls for leaders who will approach Moscow and other major customers at once with constructive plans that would parallel in scope those on which this country is waging war . . . leaders who will make it clear at the outset that this bid for cooperative action emphatically demands that each nation shall have complete freedom to determine its internal political and economic organization without interference from the other.

It is *this* caliber of leadership upon which our future hinges.

James H. McGraw, Jr.

President McGraw-Hill Publishing Company, Inc.

THIS IS THE 29TH OF A SERIES

It Takes HUMAN RELATIONS

TENSION WAS HIGH in the president's outer office. A report had just come in that labor organizers were standing outside the plant gates handing out circulars to the incoming employees. The guardians of the chief executive buzzed among themselves. Who was to bear the brunt of the executive explosion which was sure to follow? Finally the first assistant screwed up courage to enter the inner sanctum. He laid the report before the boss, braced himself for whatever was to come, and then received the shock of his life.

"Arrange for a general meeting of all our employees within an hour. Cancel all my appointments for this morning. Go out to the main gates and escort the gentlemen with the circulars to this office at once."

The first assistant gaped, managed to mumble a "Yes, sir," and set out to perform this unusual task. In due course, the labor men arrived. The president greeted them cordially and invited them to occupy his most luxurious chairs. He abandoned the austerity of his desk and sat down in the circle with them, saying:

"Fellows you have made your work unduly difficult by trying to reach our employees outside the plant. That was completely unnecessary in this organization. We operate here as a democracy and we are more than eager to preserve the principles of free speech. I have arranged for an immediate general meeting of the employes at which you are invited to present your case under conditions befitting the dignity of your message. I shall introduce you to our group at that meeting."

The labor men looked at each other in silence. They were even more deeply shocked than the first assistant had been. After the meeting came the crucial test. The employees voted almost unanimously against joining the labor organization.

THE FOREGOING PARABLE is not a dream. It is a true story. It has happened once and it can happen again. The moral is as simple as the eleven short words of the golden rule. But how many presidents are handling their industrial relations that way? And how many boards of directors would approve of that kind of action if they were consulted. Decidedly too few is the answer.

There is a pitiable lack of thoughtful human relations in the vast majority of management today. True there is plenty of paternalism in industry. The industrial community is full of house organs, group insurance policies, service pins, gold watches and similar things which have a definite and an important place. But they are not enough—not nearly enough.

The executive who has the heaven-sent gift of making the most lowly floor-sweeper feel that his job is most vital to the company is the most highly prized possession of any organization anywhere. The pat on the back, the interest in the new baby or the ailing wife must be sincerely felt if they are to be effective. The gift for the baby, the flowers for the wife should come first from management and later from fellow employees. These are but a few of the little things that cost so little in cash and effort, but mean so very much to the fellow who receives them.

EXECUTIVES not blessed with the ability to think about these little things as well as big ones, should be honest with themselves and admit it to themselves. They should surround themselves with one or more associates who have this important work as their chief assignment, because it is the most important job in any company—large or small. If the working force is so large that one person is not enough to do this work and do it well, more personnel should be added.

You may call this industrial relations, personnel relations, or any other name, but it is far more than all of these. It is human relations. It is the practical application of the poet's human touch. It is simply treating the other fellow as if he were a human being like yourself.

In the industrial period that has just passed, much of the strife and unrest and defeat that management has suffered at the hands of labor could have been avoided or substantially softened by this simple formula. In the era that lies ahead it will be very much more important. It will be so vital, in fact, that unless management accepts its full responsibility in this direction, the very survival of our system of private industry is in grave doubt.

Leslie E. Neville

EDITOR

Contract Termination—Key to Airpower and Security

By J. CARLTON WARD, JR., *President, Fairchild Engine & Airplane Corp.*

Solvency of the aircraft industry—and with it our means to maintain the peace—depends on successful administration of the War Contracts Settlement Act. Here an aviation leader presents a tangible program for such administration.

CONTRACT TERMINATION will take this country in one of two directions: To leading airpower for America, or to a repetition of that unhappy condition in which the nation found itself after World War I. The latter predicament continued right up until 1940, when France and England spent large sums of money here trying to bolster their own war machines.

We in the aviation industry who are responsible for our respective solutions to the problems presented fear that under present conditions we may not have the resources to assure the nation of the air power essential to security.

This fear for survival may appear groundless from a cursory glance of aircraft balance sheets. But a study of the Harvard report—"The Financial Position of the Aircraft Industry"—will quickly show the weakness of our stand. We who must administer these companies are frightened by the prospects we face. These prospects are even more sobering in view of the fact that military leaders consider our industry an integral part of the air forces.

Fortunately, however, these military leaders want to administer our industry *out* of the war on the same plane and under the same policies used to get it *into* the war. Going into the war, it will be remembered, verbal requests were frequently accepted by the industry for huge monetary commitments long before they could be covered by the ever-necessary paper work. Nothing was allowed to prevent production aimed to guarantee the nation's survival.

Now the Army intends to honor those commitments as production is demobilized. This means negotiated settlements in the spirit of the broad objectives of the War Contract Settlement Act of 1944, and not through the administration of complex accounting details and hair splitting.

The near-tragic example of the last war's methods provides the best warning for avoidance of the complex-hair splitting method. Then the majority of airframes were produced by aircraft companies, but the automobile companies produced most of the engines. Forty percent of Army expenditures for planes and engines went to regular aviation companies. Curtiss Aeroplane & Motor Corp.; Wright-Martin Co.; Dayton-Wright Co.; and Standard Aircraft Co. represented 72 percent of all planes and engines bought by the Army from regular aircraft manufacturers. These same companies also received substantial Navy orders.

Here, under the last war's settlement policies, is what happened to those companies:

Curtiss had sales of approximately $6,000,000 in 1916 . . . $46,000,000 in 1918 . . . and $1,261,000 in 1921. In 1923 the company was "reorganized," a polite way of saying it underwent a major operation, coming out with new balance sheets.

Wright-Martin was also reorganized, most of the assets being sold to International Truck Corp., with the engine business taken over by Wright Aeronautical Corp.

Dayton-Wright ceased building planes. It became a facility of General Motors, and so passed out of the aircraft picture.

Standard went out of business, as did such smaller organizations as Sturtevan, Burgess, and West Virginia.

This, then, is what happened to 72 percent of the aviation industry under the then-existing contract settlement legislation.

What happened to general business during that time? In the five years prior to 1914, there were between 12,000 and 16,000 business failures per year, for in this country we have failures in good times as well as bad. In 1919 they were down to 6,500, but by 1921—after the war—they had popped up to 20,000. More important, however, is the fact that total liabilities of the failing companies prior to the war had been about $200,000,000 a year; by 1921 they hit a high of $627,000,000.

Even many companies which did not go out of business had to undergo radical financial changes. A study by the National City Bank of New York covering the reorganization of 65 manufacturing companies during the 1920's shows their assets before reorganization were $2,559,000,000—and afterward were only $1,270,000,000. In other words, they wrote off half their total assets.

And what of profits? Government representatives today persist in talking about net profits "before taxes," but there is no such thing as profits before taxes—except to the Treasury. Industry has no profit until after it has paid its taxes.

Examination of the profit trends—after taxes—in World War I and II shows very clearly the precarious position the aircraft industry occupies today.

Total net profits of all American industry amounted to $2,370,000,000 in 1914, reaching $7,300,000,000 in 1917. Then they dropped rapidly until, in 1921, total net profits were down to only $24,000,000.

Taxes, during that period, started at 1 and 2 percent of net corporate income. Then came the excess profits tax legislation of the last war, jumping taxes to 20 percent in 1917, to 38 percent in 1918, and back to 23.1 percent in 1919. After the war they were cut back to 16.2 percent in 1921, the year our total American business made only $24,000,000.

Total net income, after taxes, earned by all industry jumped from $4,000,000,000 in 1939, when World War II started, to a peak of $9,600,000,000 last year. One fact must, however, be kept in mind: Industrial production growth in this country between the wars was tremendous. Industrial production in 1943 was more than three times the 1919 output. Even if profits today are about equal dollar-wise to those of 1919, the profit per unit is only a third as much.

This is due largely to the changed tax structure, under which, in 1939, industry paid 23.36 percent of net income. This climbed to 59.7 percent in 1943 and is estimated at 61.34 percent this year.

A comparison of net profits-to-sales further clarifies the aircraft industry's precarious position. Last year its net income after all taxes amounted to only 1.8 percent of sales, while the iron and steel companies netted 2.8, railway equipment 3.1, automobiles 3.2, petroleum products 6.8, and nonferrous metals 9 percent.

The automobile industry makes an especially interesting comparison, for its profits, to a great extent, come from aircraft production. The automobile industry has done a magnificent job with designs developed in aircraft plants. But those designs could exist only through the efforts of the airplane industry's research and development. Yet the automobile industry—whose peacetime demand grows larger every day—netted 3.2 percent on sales, the aircraft industry but 1.8 percent.

Through these figures can be traced American industrial history after World War I. They show that war profits in many cases are illusory.

If a speedy, secure termination procedure is not applied to all industry as it comes out of this war, thus assuring each manufacturer enough liquid assets to carry through the difficult reconversion period, industry's ability to carry forward and build a strong America will be seriously impaired.

In the case of the aircraft industry this problem is even more pressing, as the table above shows:

The aircraft industry's financial condition is weak compared with others, largely because it has been heavily penalized. Yet this is the industry that is being counted on to maintain American airpower. But without a constructive termination procedure, it is doubtful that the industry can fulfill the high mission set for it.

Aircrafts' Financial Position in 1942

Items	Composite of 11 Mfgrs.	Industrial Composite
Current assets to liabilities.	1.09	2.2
Net working capital to 1942 sales.....	5%	30%
Stockholders capital to sales	8%	69%
Stockholders capital to company-owned inventories...	48%	334%

The problem is one of statesmanship, and not one of enforcement of complex accounting regulations. The industry must be able to assume that the problem is being attacked in the spirit of the law, for the industry cannot feel that it is solvent until terminations have been made.

To help maintain that solvency, and with it the ability to keep America secure through possession of adequate airpower, these points are offered as a basis for termination action:

1. Termination and disposal officers should be able to make prompt decisions. Naturally, each officer assumes a rather humbling personal responsibility, but the responsibility for prompt action must transcend the personal position. Every effort should be made to avoid such instances as the case where a disposal officer was reluctant to authorize scrapping of castings and forgings of very special design even after the materials had already been determined to be surplus.

2. As urged by the Aeronautical Chamber of Commerce, settlements should be negotiated with a minimum of formula. This is important for, if we continue the present trend, we will soon find that termination negotiations will require *more* formulas, statements, costs, and, most important, greater delay in final settlement.

3. The contractor should be permitted greater latitude in settling subcontractor and vendor claims. This is the biggest job loaded on the contractor, for we must remember that national policy required the utilization of thousands of small shops, many of them ill-equipped from the standpoint of cost records. Thus, in many cases, the prime contractor must do most of the work of claim preparation. The job is almost too big to be handled with available manpower; it could be eased considerably if the contractor were allowed to settle many claims simply by using good judgment. In addition, government could assist greatly by inaugurating a further educational program directed to subcontractors, also vendors.

4. Cost-plus-fixed-fee contract termination procedure should be clarified. There is, for example, a case where the contract has been terminated but as yet the procedure has not been completely established by the government. In three or four months, however, the contract is quite liable to criticism for lack of progress in claim preparation. Establishment of a simple negotiated procedure will eliminate the CPFF procedure when a contract is terminated. Even a "fixed price" negotiation, leaving some risk with the contractor, might be desirable.


5. Consideration should be given to the problem of increased costs resulting from partial terminations. Such increased costs are due to the partial termination, but it is understood that the contractor, to obtain relief, must negotiate increased prices on the contract for the remaining undetermined quantities. Why make the contractor take on two negotiations when one could do the job? The whole thing could be done by the termination officer, or other designated official, working with the contractor on terminations.

6. Pre-planning of terminations is necessary. In one case, for instance, the need for spare parts was not considered until after the original termination had been made, necessitating revision of the whole schedule. In another case, a contract for engines was affected by five different termination notices. Obviously, when changes are made in the status of a termination, it is impossible to make proper material allocation and segregation. In such instances it would be advisable, therefore, to assume a date of termination and prepare claims based upon the status as of that time.

7. A simplified method of material inspection should be permitted. As related to work in progress, it would appear sufficient that the inspection be limited to count and extent of work completed (by operation, if possible). To the count could be applied a rate of rejection based upon past experience. This proposal would eliminate the need for a detailed inspection of each and every part, with attendant delay and cost.

8. Cooperation and coordination between the various government officials is, of course, important to the speed of settlement. Usually involved, for instance, are the inspection and disposal, accountability, and termination officers. Without coordination, the delays resulting from a technicality imposed by any one of them can slow—or even tie—up the work of the others.

Prompt decisions are necessary.



Settlements should be made with a minimum of formula.



Give the contractor more latitude in settling subcontractors' claims.



Government should clarify cost-plus contract termination procedure.



Termination pre-planning is necessary.



Simplify inspection methods.



Government agencies must coordinate and cooperate.



Give 'Em the Data . . . And They'll Fix It—Fast

By **DICK D. MOYER,** *Service Engineer, Lockheed Aircraft Corp.*

Experience brought forth this service rep's cogent proposal to help Fourth Echelon maintenance men—who have shown unusual ingenuity—keep their fighting craft in the air.

. . . . *Fourth Echelon includes all operations necessary to completely restore worn or damaged aircraft to a condition of tactical serviceability, also the periodic major overhaul of engines, unit assemblies, accessories, and auxiliary equipment, with fabrication of such parts as may be required, accomplishment of technical compliance changes, and the recovery, reclamation, or repair of aircraft incapable of flight.*—ASC Liaison Functions, Page 136.

TO CARRY OUT its comprehensive operations, the Fourth Echelon base is set up and operated in a manner somewhat resembling an airframe manufacturing plant, the principal difference being the diversified nature of the work, consequent shorter "runs", and the unpredictable nature of the emergencies to be met.

And to accomplish its functions, the Fourth Echelon depot is provisioned with, and has available, all but one—and the most important, at that—of the facilities it needs. It has spare parts, tools, machinery, and raw stock—*but no tooling data.*

There are few who will question the value and probable need for tooling information where major overhaul and rebuilding of aircraft is done. But anticipating the normal reaction of production-wise readers—summed up, perhaps, in the question, "Is it proposed to virtually transport complete aircraft factories to Fourth Echelon bases?"—the answer is "No".

Fourth Echelon depots are small-scale airframe factories. They are not tooled for large volume production, but do have lathes, presses, drop hammers, milling machines, and many other machine tools necessary for fabrication of airframe structures. But while they are expected to fabricate and assemble airframe parts and assemblies, they do not, as we have said, have routine access to one of the most vital keys to solution of the problems they must solve—tooling data. Yet such data exists, and could quite easily be made available.

No new department would be necessary to handle the data. No fleet of ships would be required to transport it. And no great libraries of blueprints would have to be established all over the world. In fact, data could be supplied, on request, in microfilm form. With our present globe-girdling Army and Navy air transport services, the 25 to 200 lb. of tooling data, manuals, gages, and occasional copies of master tooling required for an accurate, speedy job—all could be delivered anywhere in a few hours, 24 to 100 at most.

Such service could be put into effect by requests from proper military authorities to make available such information and tooling, together with instructions to the transport commands to haul it. Requested by wire or cable, the few pounds of vital data, gages, or pieces of special tooling required where mating areas of assemblies are involved, could soon be on the way.


Such a system would save weeks, and in many instances months, of delay in getting sorely-needed combat aircraft back into the air. It would save vast amounts of shipping space now devoted to assembled parts and components. It would save materials now discarded because they cannot be reworked in depots, for lack of vital data. And it would save untold man-hours devoted to the fabrication, assembly, and transport of spare parts—many of which will never be used—now needed to stock bases.

From my personal experience, which includes a considerable amount accumulated at several overseas bases, and that of other field service men with whom I have talked shop, it is my observation that the "manufacturing" functions of Fourth Echelon depots constitutes the largest portion of their activity. For example, consider the actual problems encountered, in a typical instance, at a depot in East Africa, and the advantages which accrued as a result of methods followed.

When a heavy bomber bashed its nose section, more than two months were required to rebuild and replace it. Other instances of delay as long as five months were on record—delays waiting for bulky, fragile assemblies to be shipped from the states. One plane out of service for two, three, or even five months, was not important. But, if 25 heavies were out of service, because of wrecked nose sections, delays of even two weeks, rather than two months, could be critical.

And that would have been exactly the case had it not been for some ingenious

(*Turn to page* 269)

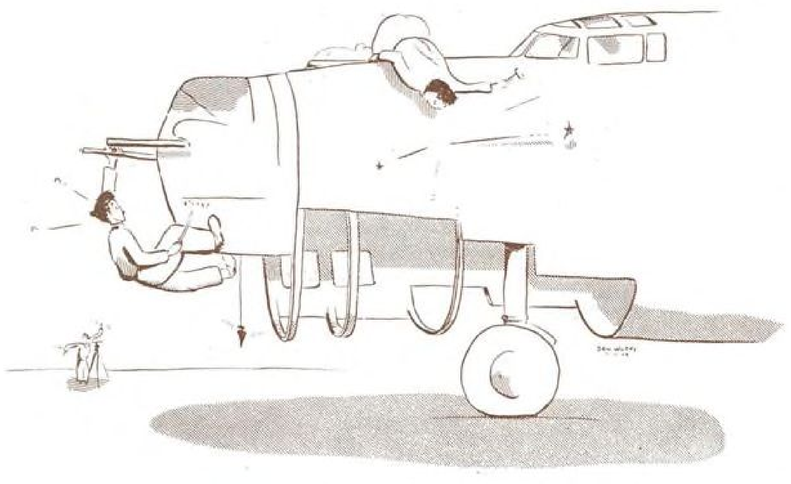

"Parts were assembled in the ship, using plumb bobs, levels, transits, and the like, to align them—a very slow method."

The Economic Future Of Aviation Technology

Analyzing the operating expenses of those transport planes—both immediate postwar and future postwar—designed to utilize propeller-turbine power plants.

PART III

By **FREDERIC FLADER,**
President, Frederic Flader Co., Consulting Aeronautical Engineers

DEVELOPMENT OF THIS ANALYSIS of the trend of airline operating costs for passengers and cargo has shown (Part II, Page 118, Aug. AVIATION) a possible reduction from 58c. per ton-mile to a new rate of about 35c. per ton-mile. These figures drew a comparison between the ton-mile charge for air express in 1940 and a probable figure for a postwar type of conventional design (Design C), which may be available approximately five years after the war.

The possibilities for cost reduction in the airplane itself, as distinguished from ground and overhead costs, lies in the improvement of its structural weight efficiency, its aerodynamic efficiency, and in power plant performance. The Design C airplane of Part II incorporates structural and aerodynamic refinements which are foreseeable and which can be developed by designers within the time specified.

Improvements in power output, weight efficiency, fuel consumption, and arrangement of power plants have been a major factor in the steady progress made in the past in the over-all performance of aircraft.

This progress is continuing with the four-cycle internal-combustion type of engine and will no doubt go on indefinitely. It is understood now how better materials can improve thermal efficiency. More efficient superchargers are on the way, and fan cooling offers a means for reducing cooling losses.

This article will survey the possibilities of the propeller-turbine type of power plant in relation to costs. It is not desired in any way to infer that the turbo engine will replace the internal combustion reciprocating type. This analysis may appear to be somewhat vulnerable to criticism because the postwar types described in Part II do not contemplate any improvements in internal combustion reciprocating power plants within the period of five years mentioned. This is admittedly not quite factual.

It is hoped that the reader will consider—if any comparisons are being made—that the figures already given are intended to show what performance may reasonably be expected from the presently available types of structure, aerodynamic design, and power plants. The results from the computations incorporating turbine engines may show a trend based

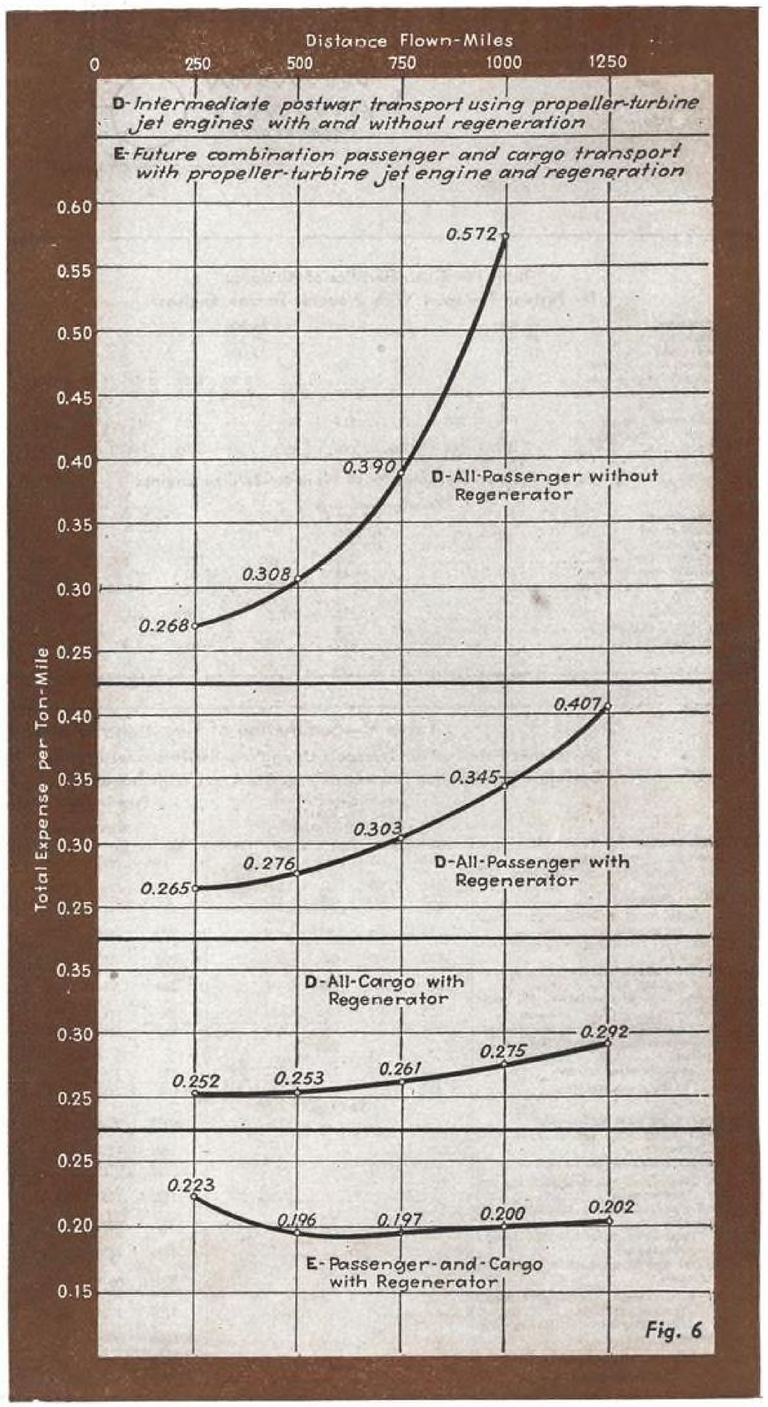


Fig. 6

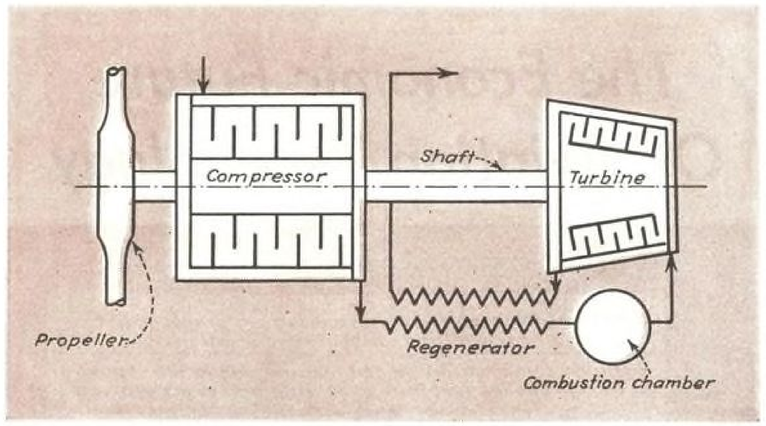


Fig. 7. As shown, propeller, air compressor and turbine are mounted on a common shaft. The combustion chamber and the regenerator complete essential units. Cycle of operation is as follows: (1) Air is taken in; (2) air is compressed; (3) air is passed through regenerator or heat exchanger and into combustion chamber where fuel is injected and burned (with enough fuel burned to raise temperature of air to a high value); (4) hot air and gas go through gas turbine, which furnished power to drive compressor and propeller; (5) gases from turbine pass through regenerator, where some of otherwise wasted heat is given up to incoming air, thereby raising over-all thermal efficiency of cycle; and (6) exhaust gases exit through tail pipe, contributing some jet thrust.

Table IV—Characteristics of Airplanes

D—Postwar Transport With Propeller-Turbine Engines

Gross weight	58,500				58,500					
Weight empty	40,750				36,430					
Useful load	17,750				22,070					
Number of passengers	61	54	47	39	32					
Capacity cargo in tons						8.30	7.56	6.83	6.09	5.36
Capacity payload in tons	6.14	5.40	4.67	3.93	3.20	8.30	7.56	6.83	6.09	5.36
Crew	4					2				
Block speed	188	205	211	214	216	188	205	211	214	216
Number of engines	2					2				
Trip distance	250	500	750	1,000	1,250	250	500	750	1,000	1,250

E—Future Postwar Transport With Propeller-Turbine Engines

	Passenger-and-Cargo				
Gross weight	200,000				
Weight empty	100,000				
Useful load	100,000				
Number of passengers	200	100	100	100	100
Capacity cargo in tons	14.43	27.75	26.05	24.36	22.67
Capacity payload in tons	34.43	37.75	36.05	34.36	32.67
Crew	4				
Block speed	215	237.5	246	250.5	253.5
Number of engines	4				
Trip distance	250	500	750	1,000	1,250

Table V—Summation of Flying and Ground Expense

D—Intermediate Postwar Transport Using Propeller-Turbo Jet Engines With and Without Regeneration.

E—Future Combination Passenger-Cargo Transport With Propeller-Turbo Jet Engines and Regeneration.

	Intermediate Postwar All-Passenger Without Regenerator					Propeller-Turbo, Design D With Regenerator					Future Propeller-Turbo Transport, Design E With Regeneration				
Range in Miles	250	500	750	1,000	1,250	250	500	750	1,000	1,250	256	500	750	1,000	1,250
Direct flying costs per ton-mile	.1044	.123	.163	.254	.....	.103	.1093	.1245	.1487	.1856	.0467	.0382	.0387	.0399	.0414
Direct flying costs per ton-mile, 65% load factor	.161	.189	.251	.391	.....	.159	.168	.192	.229	.286	.0719	.0587	.0595	.0614	.0637
Indirect flying costs per ton-mile	.072	.082	.097	.129	.....	.071	.072	.074	.076	.078	.0485	.0352	.0355	.0362	.0365
Total direct and indirect flying cost per ton-mile	.233	.271	.348	.520	.....	.230	.240	.266	.305	.364	.1204	.0939	.0950	.0976	.1002
Traffic, & advertising expense/revenue ton-mile	.020	.020	.020	.020	.....	.020	.020	.020	.020	.020	.0530	.035	.036	.037	.037
Total direct, indirect, traffic, & adv./rev. ton-mile	.253	.291	.368	.540	.....	.250	.260	.286	.325	.384	.1734	.1289	.1310	.1346	.1372
General and administrative, 6% other expenses	.015	.017	.022	.032	.....	.015	.016	.017	.020	.023	.0140	.0074	.0079	.0081	.0082
Total airline oper. exp./rev. ton-mile	.268	.308	.390	.572	.....	.265	.276	.303	.345	.407	.1874	.1363	.1389	.1427	.1454
Ground handling expense (Railway Express)	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.036	.060	.059	.058	.057
Total operating expense	.268	.308	.390	.572	.....	.265	.276	.303	.345	.407	.2234	.1963	.1979	.2007	.2024
Total payload, tons	6.42	5.05	3.68	2.31	.94	6.029	5.249	4.474	3.689	2.914	34.43	37.75	36.05	34.36	32.67
	All-Cargo														
Direct flying costs per ton-mile						.0713	.0720	.0774	.0854	.0958					
Direct flying costs per ton-mile, 65% load factor						.1097	.1107	.1190	.1314	.1474					
Indirect flying costs per ton-mile						.0326	.0326	.6326	.0326	.0326					
Total direct and indirect flying cost per ton-mile						.1423	.1433	.1516	.1640	.1800					
Traffic and advertising expense/revenue ton-mile						.020	.020	.020	.020	.020					
Total direct, indirect, traffic, & adv./rev. ton-mile						.1623	.1633	.1716	.1840	.2000					
General and administrative, 6% other expenses						.0097	.0098	.0103	.0111	.0120					
Total airline operating expense/revenue ton-mile						.1720	.1731	.1819	.1951	.2120					
Ground handling expense (Railway Express)						.0800	.080	.080	.080	.080					
Total operating expense						.2520	.2531	.2619	.2751	.2920					
Total payload, tons						8.305	7.564	6.832	6.092	5.357					

entirely on the possibility of obtaining the performance as set forth.

A great deal has been written and published about the turbo-jet engine, therefore its component parts and cycle of operation are fairly well known. Fig. 7 is a diagram showing the components of a propeller-turbine type of engine which has been assumed as the installation in two airplane types to be described later.

The propeller-turbine engine briefly described in Fig. 7 is specified (Table IV) for both Designs D and E. The size of Design D is such as to maintain reasonable wing and power loadings, and the design is one that should meet all the regulation requirements.

Design E is the same basic airplane as Design C in Part II of this series, except that the power plants have been changed from the conventional four-cycle internal-combustion type, currently available, to the propeller-turbine engines.

Cruising speeds for both designs have been selected at values somewhat higher than those for best economy or the greatest number of miles per gallon. There is a disadvantage in so doing from the standpoint of fuel costs and payload carried, but the over-all economy is slightly better owing to the marked influence of cruising speeds on operating costs.

The assumption of higher cruising speeds is on operating costs. The assumption of higher cruising speeds is believed to be justified from the standpoint of engine life and overhaul. This is due to the fact that the characteristics of the turbine engine permit operation at percentages of power closer to normal than is the case in conventional practice, at some sacrifice in fuel economy, but without exceeding allowable temperature limits.

Recovery of otherwise wasted heat will be an important consideration in the use of turbine engines. The use of the regenerator is not an essential part of the operation of this type of power plant. The same power could be generated without this interchange and recovery of heat, but this would be at the price of greatly increased fuel consumption, prohibitive for aircraft which are intended to carry satisfactory payloads over long distances.

The regenerator has the serious disadvantage of being very heavy and large in dimensions. The designer must evaluate the degree of regeneration on the basis of its economic value, using larger or smaller regenerators according to the performance specifications of his design. Information on this subject has been made available, and thus will not be discussed here.


For purposes of comparison, the Design D airplane's operating costs have been computed with and without the use of regeneration. It has been assumed that 75 percent of the heat in the exhaust from the turbine is recovered in the regenerator.

Table V, which is similar to Table II in Part II, shows the computed operating expenses for all-passenger and all-cargo operation for the smaller of the two Design D airplanes. The costs for the large Design E craft are for a combination passenger and cargo service, as described for the similar Design C airplane in Part II of this series.

The curves of Figs. 6 and 8 show the results in graphic form. On an average flight of 750 mi., the possible cost of operation of the C airplane is 19.8c. per ton-mile. This is a reduction from the 1935-1944 transport of Part I of 16.65c. per ton-mile, or about 46 percent. This indicates the possibility of a new postwar rate of 31c. per ton-mile.

Referring again to Fig. 3 (Part I, June AVIATION), a probable market for 200,000,000 ton-miles is apparent at this price. This represents approximately 75 times the ton-miles of 1940.

This reduction of cost does not hold out the promise that air express will take the place of rail express for less than carload lot shipments, nor does it appear that this will be so within the foreseeable future. However, the possible gain in air express shipments is nonetheless quite substantial.

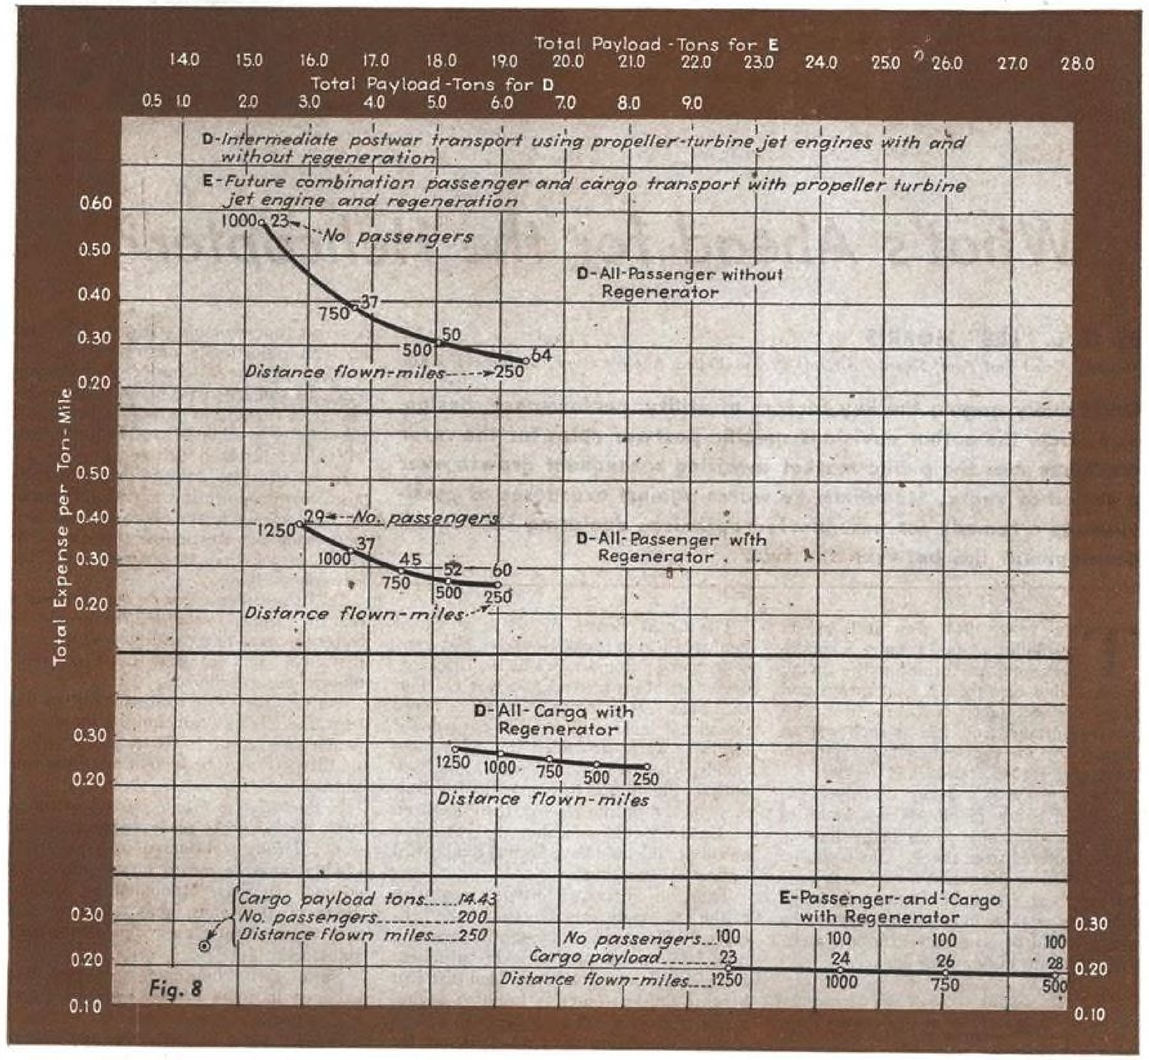



R-4B rotor ships for AAF under construction on world's first helicopter assembly line in Sikorsky Bridgeport plant. States the author: This is purely manufacture for the military. Broad civilian production, with prices commensurate, "will not be achieved soon after the war."

What's Ahead for the Helicopter?*

By C. L. "LES" MORRIS

Formerly Chief Test Pilot, Sikorsky Aircraft Div. of United Aircraft Corp., Bridgeport, Conn.

Objectively gaging the key factors of utility, performance, design, and price, the author envisions specific postwar roles for the rotor craft but sees the public market awaiting subsequent growth over a period of years. Meantime, he warns against overdoses of pessimism as a remedy for unsupported optimism, declaring the logical development lies between the two.

THE YEAR 1944 was still in its swaddling clothes when a Sikorsky helicopter performed a life-saving mission that was totally spontaneous and tragically necessary. It was the first completely unstaged job, and as such was an augury of an ever-expanding future in helicopter transportation and service.

On January 3, a Navy destroyer exploded off Sandy Hook. Men were killed and injured. Some were badly burned, others suffered from shock. Blood plasma was needed in the quickest way possible—but by boat from the Battery it would take over an hour to cross the bay, and by car it would be necessary to follow a circuitous route taking even longer.

The Coast Guard Air Base at Floyd Bennett Field in lower Brooklyn had some helicopters. Comdr. Frank A. Erickson, one of my former students, was chief of the base. He secured clearance, even though all other military and commercial aircraft were grounded by very low clouds, freezing rain and snow, and high winds. He flew a helicopter to the Battery, picked up the plasma, then bee-lined to Sandy Hook—finishing the job more quickly than could have been accomplished by any other means.

Thus, an emergency brings recognition of the immediate potentialities of the helicopter. However, a thoughtful warning may be sounded against over-optimism: In brief, it is not to be concluded that just because the helicopter is fulfilling a vital military service today, John Doe will be buying and flying one tomorrow in the common course of his pursuits. This has been an unfortunate misconception, fostered in part by ill-considered helicopter publicity and, in part, by John Doe's earnest desire to believe in the helicopter as a potentially great postwar industry that will affect his own existence.

In an effort to combat this over-optimism many informed writers and speakers have swung to the other extreme and have made over-pessimistic statements. It seems to me that the correct path lies between the two.

Let us consider a few salient points in a realistic manner so that the reader may be better prepared to separate the wheat from the chaff and to draw his own well-thought-out conclusions.

Perhaps the subject on which there has been the greatest amount of loose, unfounded comment is the price for which a helicopter may be bought after the war ends.

In the *Atlantic Monthly* for September, 1942, Mr. Sikorsky made a statement that was carefully considered and that said exactly what he meant to say—no more, no less. It was: "Manufactured by hundreds of thousands, the helicopter will cost about as much as a medium-priced automobile."

Since then, helicopter publicity has indulged in some luscious wishful-thinking, coming to a climax in a recent promise (made by one who had everything to gain and nothing to lose) that a postwar helicopter would sell for $995—not $996 or $994—but exactly $995! Let us endeavor to inject some sanity into this business of guessing at a price.

To begin with, can you confidently assert what a dollar will be worth after the war? Will a pair of shoes cost $6, or $2, or $20—or perhaps even more? Will a low-priced car still sell for $800?

With uncertainty as to the value of the dollar, it is downright foolishness to promise a fixed price for anything. Estimates should be made relative to some other commodity. That is why Mr. Sikorsky chose to say, "It will cost about as much as a medium-priced automobile." If a medium-priced automobile should sell for $6,000 after the war, this prophecy would still be within shooting distance.

But care should even be exercised in interpreting that word "medium-priced." It definitely does not mean "average-priced." On the basis of prewar dollar values, a high-priced automobile is around $3,000–$4,000; a low-priced one is around $900–$1,000. Therefore, "medium-priced" means something in the neighborhood of $2,000–$2,500. But let me emphasize again that dollar signs should not appear in this discussion. The safest statement is that, *if* a $2,200 prewar car still sells for $2,200 after the war, then, under certain circumstances, a helicopter may someday sell for about the same price.

What are those "certain circumstances"? Mr. Sikorsky says, "Manufactured by hundreds of thousands." That sounds simple, perhaps—but it isn't. Before our entrance into the war, the President shocked the aircraft industry by establishing a quota of 50,000 airplanes for a twelve-month period. This was more than all the airplanes we had ever built since the Wright brothers first flew at Kitty Hawk!

But note carefully that it was the responsibility of an *entire* industry to meet that figure. It did—by virtue of a perfectly tremendous effort.

Recent releases indicate that at present this country is producing about 9,000 airplanes a month. And when I say "this country," I mean all that it implies. After four hard years, a great, nation-wide industry, expanded to many times its prewar size, utilizing vast facilities of the automotive field, and working under extremes of war pressure with the maximum of priority, still has a cumulative output of only about 100,000 units a year—and even those units are divided among about 40 different types of aircraft.

If it has taken four years to accomplish this, how long will it take one individual company to reach the same production figure—much less the "hundreds of thousands" Mr. Sikorsky referred to? The answer is self-evident, at least in negation: It will *not* be achieved soon after the war.

The situation back of Mr. Sikorsky's statement might be clarified if it is realized that the automotive industry generally builds engines for about a dollar per horsepower. Aircraft engines, on the other hand, average about ten times this amount, although some afford cuts in horsepower costs to around $5–$6. When we consider that a decent two-to-three-place helicopter should have about 200 hp., it immediately becomes apparent that the engine alone is going to cost as much as the average person is planning to pay for the whole machine. Mass production may come to the rescue later on, but it is probable that, for quite a while, aircraft engines will continue to be higher priced than automobile engines.

If you proceed further and apply this type of analysis to the transmission, the main rotor and tail rotor blades, the hub mechanisms, the controls, the instruments, the landing gear, and the fuselage structure itself, you can appreciate Mr. Sikorsky's studied reasoning when he said: "Manufactured by hundreds of thousands, it will cost about as much as a medium-priced automobile."


What about performance—speed, range, and load? Here I always tread cautiously, surrounding each statement with carefully guarded qualifications. I remember that, about 1928, an eminent aeronautical engineer prepared and published an erudite dissertation proving conclusively that an airplane weighing more than 30,000 lb. could never leave the ground.


Yet we now see airplanes of twice and three times that size, and we confidently expect that they will exceed 100 tons, or even 500 tons when the economic need arises.

The fallacy of this 1928 forecast was that it did not take into account future research and development. If it had started by saying, "On the basis of present knowledge . . . ," it would have been on tenable ground.

In surveying the helicopter's future, that qualifying phrase assumes even greater significance. It is apparent that striking successes have been achieved to date with a most elementary knowledge

(*Turn to page* 259)

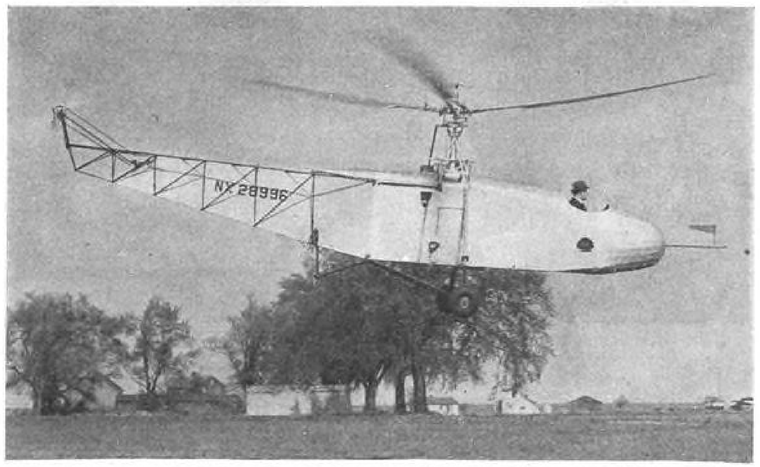

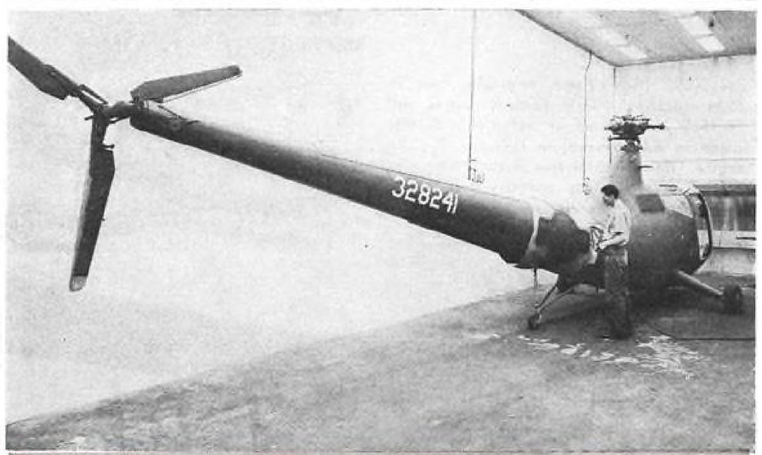


Striking advance in design within a comparatively short period is illustrated by these two contrasting shots. Top: Igor Sikorsky aloft in initial VS-300. Above: Designer's latest model, the XR-6, gets insignia paint job prior to installation of main rotor. "Helicopter research," says Mr. Morris, "is practically nil compared with the vast amount that has been done on the conventional airplanes. As the fund of knowledge grows, the entire outlook cannot but change accordingly."

* From the manuscript of the author's forthcoming book, "Pioneering the Helicopter" (McGraw-Hill Book Co.)

WRIGHT AERONAUTICAL MARKS 25th BIRTHDAY



Producer of power plants for such craft as the Boeing Superfortress and Lockheed Constellation completes quarter-century of production. Striking industrial record includes design and construction of planes as well as engines. And jet plants are latest addition to program.

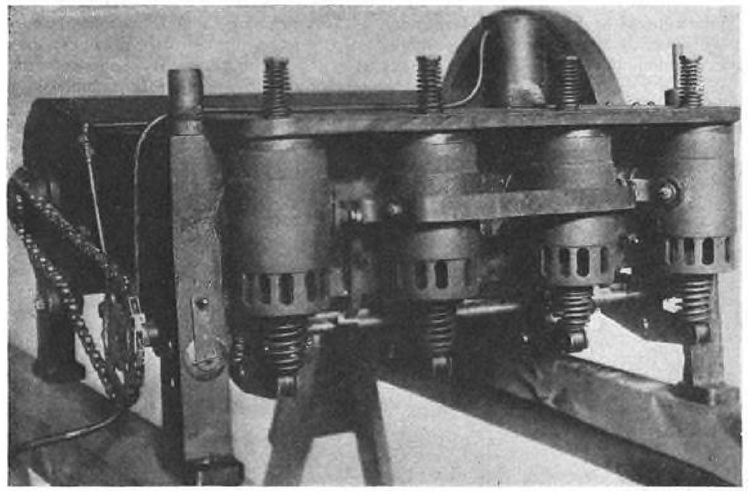


This is original Wright brothers engine designed and built in their own Dayton shop, which powered first flight at Kitty Hawk in 1903. Developing 12 hp., it weighed about 13 lb. per hp., in contrast to 25-30 lb. per hp. of automobile engines of that day, and 2,200 hp.—about 1 lb. per hp.—of present day Wright Cyclone 18's which power Boeing B-29 Superfortress and Lockheed Constellation.

Soon after Wright Aero entered field of airframe construction in 1922, it developed this NW-2 racer for Navy. With 675-hp. Wright Tornado engine it broke world's seaplane record at 186 mph. Slated for entry in Schneider Cup Race, it was kept from competing when broken prop blade ripped through pontoons to decommission plane.



The XO-3 (below) was originally built in 1924 mounting Wright Tornado engine, but in 1927 it was used in test flights as first plane to be powered by then-new Cyclone engine. Re-named the Iron Horse it was later placed in service as company test plane, being one of first craft ever used exclusively for research and development work.



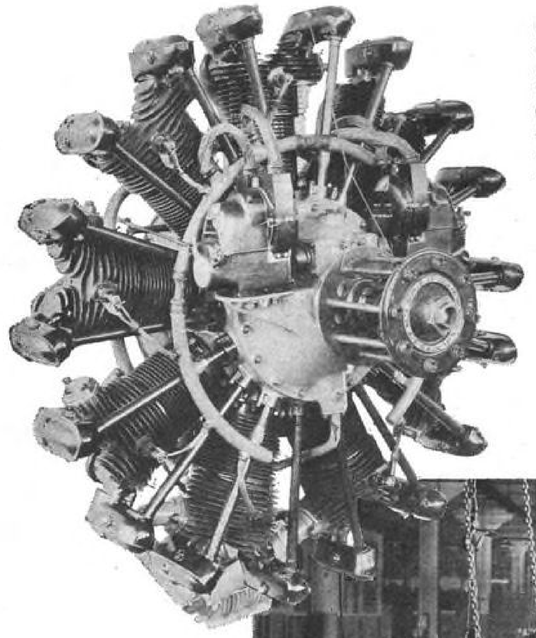

One of most famous Wright engines ever built, the 225-hp. J-5 Whirlwind. It held more records, pioneered more air routes than any other power plant; some of these "old faithfuls" are still lugging cargo in tropical and arctic regions. J-5's powered planes on history making flights of Acosta, Balchen, Byrd, Chamberlin, Earhart, Lindbergh, Kingsford-Smith, and host of others back in mid-'20's.







The old and the new. Above: J-5's move along through final assembly stages. In those days two or three men usually made up team which assembled engine from start to finish, a slow and laborious process. Note crankcase for liquid-cooled inline engine (at right just behind completed radials). Below: Wright Cyclone 18's near last of 24 assembly stations where, under new production system, specialists complete certain installations before dolly moves along power-driven line. Meanwhile, development has kept pace with production, for on 25th birthday company announced that work on gas turbine engine was under way, putting Wright definitely in jet-propelled field.



Curtiss-Wright Presents Postwar Transport

Peacetime version of Commando incorporates design improvements resulting from world-wide military service; most apparent change is re-designed nose giving better anti-icing and improved visibility.


CURTISS-WRIGHT'S FIRST BID for post-war transport business was made late last month when the company presented details of the CW-20E, peacetime version of the C-46 Commando.

Designed, as was its prototype the CW-20, for medium-range operations, the 20E will be a 36- to 42-passenger craft powered by two Wright Cyclone C18-B2 engines giving it a cruising speed of 242 mph. at 10,000 ft.


Conversion from the current C-46 military version entails several basic design changes as the result of worldwide operational experience, including re-design of the nose from contour to near-vertical windshield for improved de-icing and visibility; all-welded, easily removable fuel tanks (see page 134); improved flight control; increased gross weight and payload; and more powerful engines giving greater speed.

The new nose, which changes the craft's

(*Turn to page* 287)

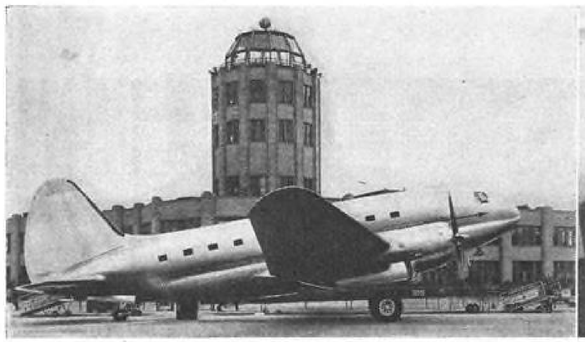


Here is how Curtiss-Wright CW-20E, peacetime version of famed C-46 Commando, will appear for airline service. New cockpit has near-vertical windshield and deep side panels for improved visibility.

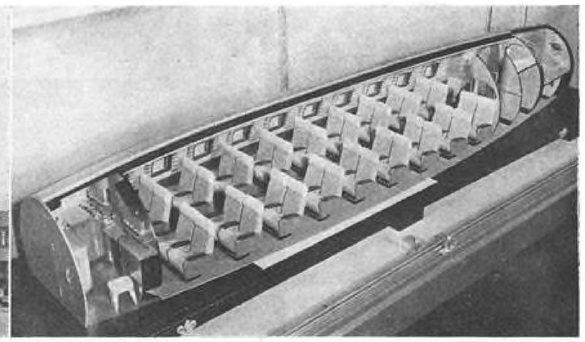

Cutaway model of CW-20E, showing galley located just aft of pilot's cabin, main passenger cabin, vestibule, and rest rooms. Mail, cargo, and baggage compartments are located below cabin floor.

Plan and profile cutaway drawings, showing various installations of Curtiss-Wright's craft for initial bid in postwar transport field.

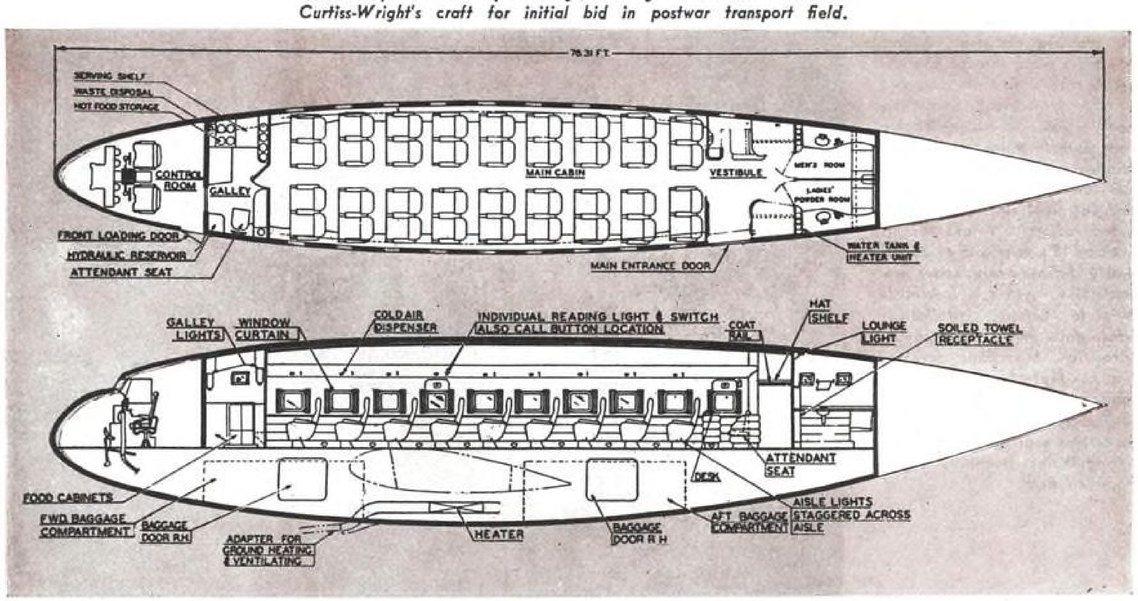

Just how should aircraft parts and accessories be sold? Delving into that pertinent question, a successful aviation product manufacturing company which has its postwar plans complete declares there's—

A Place for the Distributor In Aircraft Accessory Sales

By ARTHUR S. BROWN, *Sales Manager, Scott Aviation Corp.*

THE AIRCRAFT INDUSTRY faces distribution problems which are perhaps more critical than any other industry has ever encountered. With a tremendous production capacity on the one hand, and practically no distribution organization on the other, the problem in any case would be difficult. But when the highly competitive post-war market conditions are added, the total job to be done begins to assume mountainous proportions.

The distributor of aircraft accessories and maintenance supplies is a necessary and important facility in this distribution system, provided his operations measure up to certain service standards. Just what are these requirements?

First, he must sell merchandise to retail outlets. The term "sell" here has a very broad connotation, for it includes many services to the retail outlet only indirectly associated with sales. He must, for example, help the retailer with his business organization, accounting practices, etc. He must see that the retailer maintains an adequate stock to assure good customer service. He must assist the retailer to obtain a rapid turn-over by suggesting display, sales promotion, and advertising programs, and by helping him to obtain orders through personal effort. And, finally, he must convince the retailer of the quality, usefulness, and profit possibilities of the merchandise he has in stock.

This is a continuing job. How can it best be accomplished? Let us consider each of the requirements listed above.

To sell merchandise, the distributor's salesman must himself be convinced of its quality, usefulness, and profit-making possibilities to the retailer. This means that the distributor should encourage the field assistance of manufacturers' representatives, the attendance of his men at sales meetings conducted by the manufacturer, and sales meetings of his own devoted to these purposes.

Obviously, no one man can remain continuously convinced of the merits of 1,000 or more products. So the distributor must segregate the products he handles into staple lines which produce profits through volume rather than discount spread, and also specialties which produce longer profits through discount spread. His salesmen should *sell* the specialty lines, opening each sales interview with such a specialty product. He should take orders for whatever staple items are need *only after selling the specialty.*

In this way time will be available for all products, and greatest results secured. Such a distributor's salesman can well be proud of his profession, for he is not only serving his customers by selling them useful merchandise, but he is also acting as their sales manager and business consultant as well.

It is important that the distributor keep adequate stock in the retailer's establishment. He should remember here that what's sauce for the goose is sauce for the gander—by recommending a well-rounded stock of salable long-profit merchandise in a relatively few lines. The retailer should be able to rely on the distributor's prompt shipments for the staple items. Thus the retailer's money is only tied up in long-profit products.

The distributor's salesmen should be provided with sample accounting forms, inventory control forms, and similar material to aid the retailer in establishing correct business methods. Organized by the distributor, such material should be collated in a suitable manual so that the presentation is attractive and easy to use.

Finally, the distributor's salesman should be a student and teacher of correct advertising, display, and sales methods—and he should practice what he preaches. While many of the distributor's suppliers will provide helpful material, the final job is up to the salesman. For example, a wall poster can merely be handed to a retailer, or it can be used as an opportunity for discussion of correct location, merits of the product, and finally be given a preferred position.

(*Turn to page* 302)



"The distributor must help the retailer with his business organization, accounting, etc. . . and help him obtain rapid turnover by suggesting display, sales promotion, and advertising programs."



Four instruments are necessary for extended flying in restricted visibility, says Author Smith. They are compass-controlled (or "slaved") directional gyro; airspeed indicator; altimeter; and graphic-attitude indicator, a still-restricted but already-proven instrument.

What Kind of Instruments For the Personal Plane?*

By FREDERICK H. SMITH, *Sperry Gyroscope Co.*

Utility is a must if real plane markets are to be developed, and utility can be achieved only with proper instrumentation. Here are "specs" for three types of reasonably priced panels to give more hours of flying per dollar of investment.

THOSE OF US who are required to view tomorrow's light planes realistically are agreed unanimously, I think, on one extremely important proposition: That these planes must be designed, built, and equipped so that the men or women who buy them can derive some real utility—aside from the fun of flying—from their purchases.

Ways must be found to afford the buyer more hours-per-year of business- and pleasure-flying per dollar of investment in his light plane. If this is not done we will have turned our enthusiasts into dissatisfied customers, and customers who are dissatisfied are just as deadly to the aircraft business as to any other.

We must make the light plane not only a convenience, but a necessity; we must make it so handy, so dependable, and so easily available in terms of everyday transportation that people will look forward to its regular use. The light plane must become a *utility*.

We who manufacture instruments are not directly concerned with the problems of moderate hangar-rent, low cost spare parts, or the numbers and accessibility of airports. The question of adequate airworthy maintenance for the customer's airplane is not one of *immediate* concern, either, though all of these items are certainly vital to every one who has a commercial stake in the welfare of the light plane industry. These are problems that must be solved in a very sensible manner, again in the name of convenience and utility.

To be realistic about instrumentation for the light plane, however, is "right up our alley". We know that the airman who flies in Florida, New Mexico, and Arizona needs but few instruments in his plane to get real utility from it, because his weather is almost perpetually contact. We also know that the fellow who lives on Cape Cod, Long Island, or in Cleveland or Chicago will at least require the basic instruments so that he'll know his speed, altitude, and direction—

*Based on a paper presented before the Institute of Aeronautical Sciences National Light Aircraft Meeting.

if he's to get the useful flying time from his plane that he has paid for and is entitled to receive. The man who flies out of Pittsburgh or Birmingham can make up his mind at the outset to buy a complete set of instruments if he ever wants to see the sun. We also expect to get some regular customers in Newark and Philadelphia, too.

It is a fact that, in most sections of the United States, the number of flying days available to the light plane owner appears to be almost directly in proportion to the amount of flight instrumentation installed in his aircraft. For example, weather averages over a period of years show that each year in New England one can expect about 180 days of weather that could be classed as contact, 96 days wherein visibility is restricted, and the remainder definitely doubtful so far as itinerant flying is concerned.

Now if a man owns a plane equipped only for contact flight he has but half the year in which to use his airplane. If he wants to fly during the 30 percent of the year when his weather is neither contact or doubtful, it requires, strangely enough, just about an additional 30 percent investment in flight instruments and radio equipment for him to do so safely and legally.

This rough percentage-of-investment formula, used loosely here, does not apply when the aircraft is heavy, but it does apply to the light plane. It is, then, safe to say this: In light planes, the percentage of added utility afforded by flight instrumentation will increase almost exactly as the cost of this instrumentation, computed as a percentage of the list price of the un-instrumented airplane.

In making this statement, it is not contemplated that the average light plane pilot will care to fly instrument weather as it is presently known and classified in Civil Aeronautics Regulations. The instruments provided will be capable of doing the job *if the airman concerned is qualified to use them for extended, true instrument flight;* but their real purpose, defined in terms of light plane utility, would be to allow the safe and legal use of the light plane when local smoke, haze, etc., restrict visibility locally. (In this connection it is felt that the Civil Aeronautics Board should include another flight-classification in its rules, covering such weather conditions; it could be called Extended Contact Flight or "XCFR".)


The added utility a light plane pilot

(*Turn to page* 305)



Three types of personal planes are foreseen by author, each requiring different instruments. "Cavu" plane — tomorrow's Model T—will need only airspeed, altimeter, and compass, in addition to engine instruments, as shown at left. "Utility" craft, with wider range, should have airspeed, compass, directional gyro, and altitude indicator, as portrayed in center. Third type, or "heavy," should have all instruments of utility craft plus automatic pilot equipped with "slaved" directional gyro, as shown at right.

It's a day of Development, too!

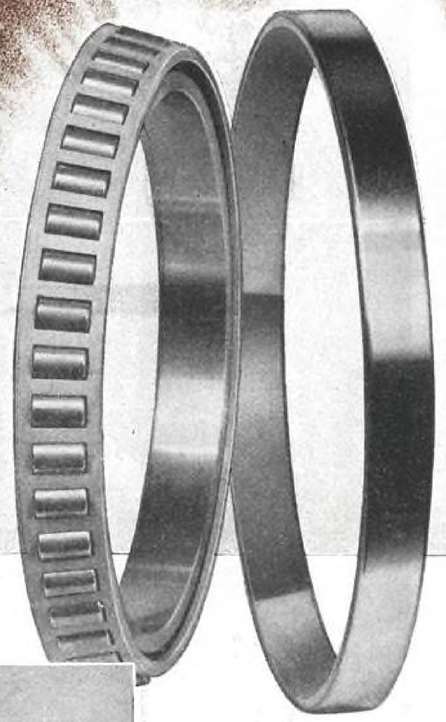



* *A Sikorsky XR-4 hovering motionless over East Hartford, Connecticut. This first helicopter to be delivered to the Army Air Forces is equipped with six Timken Bearings in the Main Rotor Blade, two in the Tail Rotor Gear Box, and six in the wheels.*

To meet the need of aircraft engineers for an anti-friction bearing — lighter in weight — of compact design — with maximum radial and thrust load carrying capacity — Timken engineers have developed a new series of tapered roller bearings.

Already, these bearings have contributed to the fine performance of Sikorsky helicopters . . . while giving them all the other advantages of Timken Bearing design for aircraft applications: assured smoothness of operation . . . ease of handling . . . power conservation and endurance . . . economical maintenance.

Consult us on your requirements. We will be glad to make recommendations.

THE TIMKEN ROLLER BEARING COMPANY, CANTON 6, OHIO

TIMKEN

TRADE-MARK REG. U. S. PAT. OFF.

TAPERED ROLLER BEARINGS



Bell helicopter shown here is representative type of single-rotor craft with anti-torque propeller (illustrated in three views of Fig. 4).

BASIC DRIVES FOR HELICOPTERS

By JOSEPH S. PECKER, *Chairman of the Board, RotaWings, Inc.*

Presented here is a simple and effective introduction to the timely subject of helicopters. Beginning with the roadable autogiro—the transitional design between automobile and 'copter—the various arrangements and functions of basic transmission units in single-rotor, bi-axial, and co-axial rotor craft are clearly analyzed.*

TO FULLY UNDERSTAND the mechanical elements of a helicopter—the transmissions, hubs, swashplate, anti-torque propeller, and control, it is necessary to become familiar with the maneuvers and flight characteristics of the craft and understand the need to reduce control to its simplest form in order to facilitate handling by a non-expert pilot.

The mechanism of the present-day helicopter closely resembles the mechanical arrangement in an automobile. Comparatively, the outstanding variations in the mechanism of a helicopter are simply to attain maneuverability essential to a flying machine.

In connection with the discussion of the various mechanical apparatus, it would be well to list various end results required in the operation of a helicopter:

1. The power from the engine must be transmitted to the rotor, and in transmitting this power it must pass through (a) a clutch for accelerating the rotor from rest, and (b) a gear speed reduction unit.
2. Some of the power must also be directed to the anti-torque propeller or propellers also utilized for directional control.
3. Mechanism must be provided for control of vertical flight both in raising and lowering the craft as well as for control in forward, sidewise, and rearward flight.

Fig. 1 shows the general arrangement of a type of helicopter incorporating a single rotor and an anti-torque propeller. An examination of the transmission elements indicates an arrangement very similar to that of an automobile, as shown in Fig. 2. The transitional design between

* This article is from material which will appear in a forthcoming book by Joseph S. Pecker and Agnew E. Larsen, to be published by the McGraw-Hill Book Co.



Platt-LePage bi-axial type helicopter with rotors laterally disposed. No anti-torque propeller is utilized. (Three-view aspects of this type craft are illustrated in Fig. 5.)

the elements of automobile and helicopter is illustrated in Fig. 3, which represents the first model roadable autogiro designed in 1935 by Agnew E. Larsen for the Autogiro Co. of America.

In the helicopter elements shown in Fig. 1, (A) is the power plant, (B) the transmission, including the clutch, (C) the vertical drive shaft to the rotor, (D) the drive to the anti-torque propeller, (E) the cooling fan, (F) the hub, and (G) the swashplate for the pitch control of the blades.

Many forms of helicopters have been built and tested, but the three most popularly known today, are:

1. A single-rotor type with single anti-torque propeller (as built by Sikorsky, Young (Bell), Piasecki, Higgins, and Kaiser.

2. The bi-axial type, laterally disposed (Focke, Breguet, Pateras-Pescara, Perry, Crocker-Hewett, and Platt-LePage).

3. The co-axial type (De Bothezat, and Hiller).

These helicopters are diagrammatically illustrated in Figs. 4, 5, and 6. Fig. 7 shows a bi-axial type with rotors longitudinally disposed. It will be noted that in the bi-axial and co-axial types, the anti-torque propeller is eliminated.

We will first consider the single-rotor type (Fig. 4) and analyze the required functions of the various elements of the transmission. The same considerations would be applicable to the other types, with slight variations discussed later.

Speed Reduction

Roto designs vary in diameter, chord, pitch, etc., for specific sizes and weights of helicopters. For purposes of this discussion, we may assume an average rotor speed of approximately 200 rpm. and a nominal engine speed of 2,000 rpm. It is evident, then, that a speed reduction gear must be provided having a ratio of approximately 10:1.

Starting Clutch

A familiar application of a clutch is in acceleration of an automobile from rest to a required speed. An experienced operator balances acceleration of engine speed against operation of the clutch pedal to obtain smooth pickup. This is done by "feel".

Sikorsky XR-5, like Bell helicopter, is also representative of single-rotor craft (diagrammatically shown in Fig. 4).



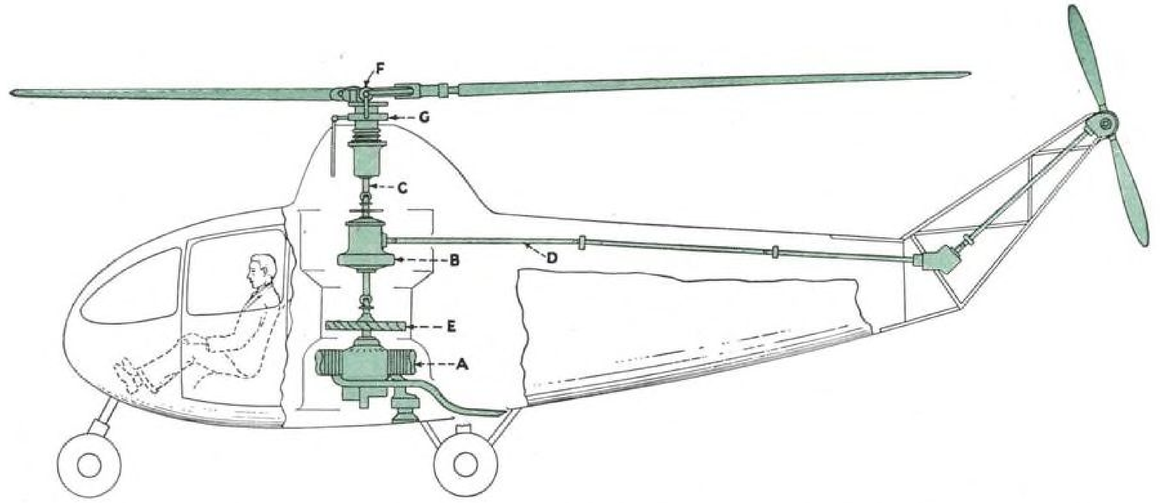


Fig. 1. Typical arrangement of units in single-rotor type helicopter as built by Sikorsky, Young (Bell), Piasecki, Kaiser, and Higgins. (A) shows engine; (B) transmission, including clutch; (C) vertical drive shaft to rotor; (D) drive to anti-torque propeller; (E) cooling fan; (F) hub; and (G) swashplate for blade pitch control.

Actually, the operator learns to balance the required torque in accelerating the load by gaging the amount of clutch pickup and engine speed. This method has been utilized for many years in accelerating autogiros. Later it was found desirable to bring the engine up to prescribed speed and apply pressure on the clutch plates through a timing device which would accelerate a 35-ft. rotor in approximately 20 to 90 sec. This resulted in smooth, safe rotor acceleration.

Following, again, the analogy of an automobile, we find several gear speed changes to facilitate acceleration from zero to cruising speed. In a helicopter, variable speed reduction ratios have as yet not been adopted. Attempts have been made to secure a device for acceleration of the rotor system from zero to maximum speed through a simple automatic device. It may well be that pioneering in helicopters will provide the gearless transmission so desired in the automotive industry.

To appreciate the problems attendant with a clutch or starting mechanism to meet the characteristics involved in starting a helicopter rotor, the following requirements are listed:

1. It should be possible to rev the engine freely without engaging the drive to the rotor.

2. Power must be applied gradually and uniformly by limiting the torque, either through variable ratio transmission, step ratios, friction clutches, or a combination of all.

3. The semi-flexible structure of the helicopter body framework and the rotor, including the mechanism by which the rotor blades are attached to the hub, must not be unduly strained.

4. Safety means must be provided to reduce any tendency toward over-throttling or (when the rotor is at speed)

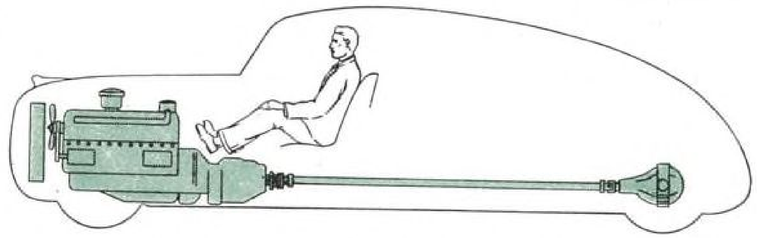


Fig. 2. Typical arrangement of automobile units, showing relative positions of engine, transmission, and universal drive to rear wheels. By considering this arrangement in vertical position and comparing it with helicopter illustrated in Fig. 1, similarity of mechanical drives is apparent.

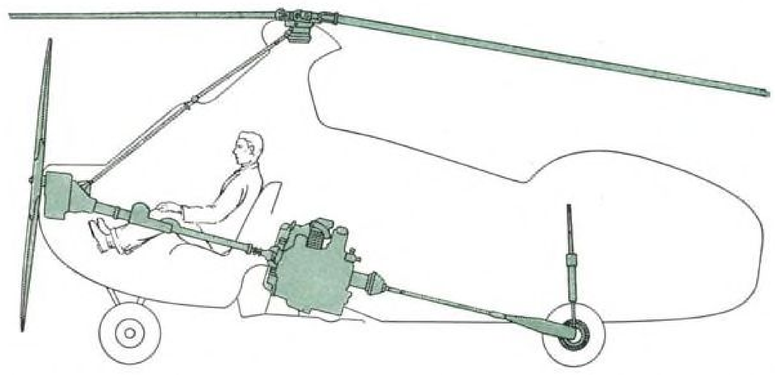


Fig. 3. Diagrammatic sketch of first roadable autogiro, designed by Agnew E. Larsen in 1935 for Autogiro Co. of America, shows transitional design between typical transmission elements of automobile (Fig. 2) and present-day helicopter (Fig. 1). Features of roadable autogiro were Pobjoy engine buried in body of fuselage, drive to rear wheels for road transportation, and drive to rotor for bringing latter up to speed.

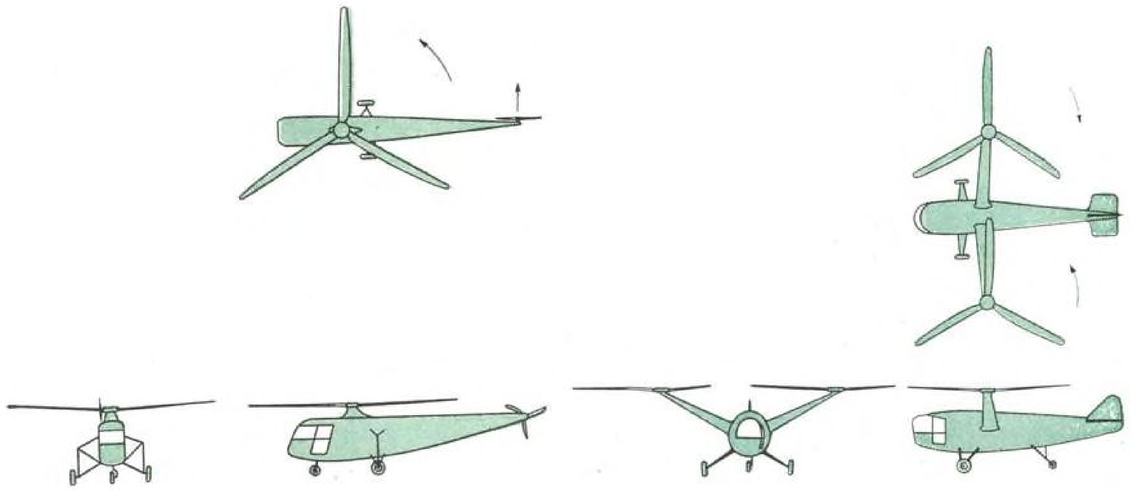


Fig. 4. Three-view illustration of single-rotor helicopter with anti-torque propeller, typical of Sikorsky, Young (Bell), Piasecki, Kaiser, and Higgins designs.

Fig. 5. Bi-axial type helicopter with rotors laterally disposed, as built by Focke in Germany and Platt-LePage in United States, is shown here in three view aspect.

under-throttling, without fear of stalling the engine.

To accomplish the foregoing, three basic elements have been found indispensable:

1. An over-sized friction clutch, whether disk or centrifugal type.
2. A gear reduction unit of approximately 10:1 ratio.
3. A freewheeling device or over-running clutch to permit autogyration or over-running of the rotor (turning faster than the speed at which it is driven).

Many and varied methods are being utilized to meet these requirements and some of the more practical will be discussed.

Freewheeling

If an automobile engine stalls because of poor acceleration, the automobile remains stalled. But in a helicopter, if engine stalling occurs after the rotor has developed some speed, the kinetic energy of the rotor would tend to drive the engine, which is undesirable. To overcome this, a freewheeling unit is introduced in the system.

With the introduction of a freewheeling device, should the engine fail or stall while in flight, it is then possible for the rotor to autogyrate. This means that as the craft descends vertically the upward thrust of the air against the rotor blades causes the rotor to revolve freely, similar to the action of an autogiro, thus permitting the helicopter to land at a safe vertical speed (assuming that the blades have auto-rotational means set either by the pilot, or automatically, to a rotational angle).

Another function of freewheeling is the ability of the rotor to continue spinning, should the engine be throttled, purposely or inadvertantly, below the gear speed ratio of the transmission. The introduction of freewheeling also prevents the engine from acting as a brake on the rotor, so insuring safety of the helicopter.

Anti-Torque

A drive must be provided to the anti-torque propeller and the latter must be geared to and operated with the main rotor at all times. The stability and maneuverability of the helicopter is dependent on the synchronization of both rotors. This is true whether the helicopter is in flight under power, or whether the engine is stalled and the helicopter is being landed under autogyration.

Relative Arrangement of Transmission Elements

The arrangement of the clutch, speed reduction unit, freewheeling unit, and gear drive to the anti-torque propeller, and the position of the engine may be varied at the discretion of the designer. Some fundamental principles, however, must be considered and adhered to. Figs. 8, 9, and

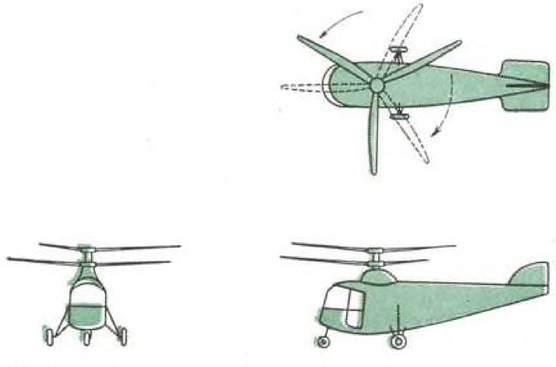


Fig. 6. Co-axial type helicopter as constructed by De Bothezat, and by Hiller. Anti-torque propeller is eliminated.

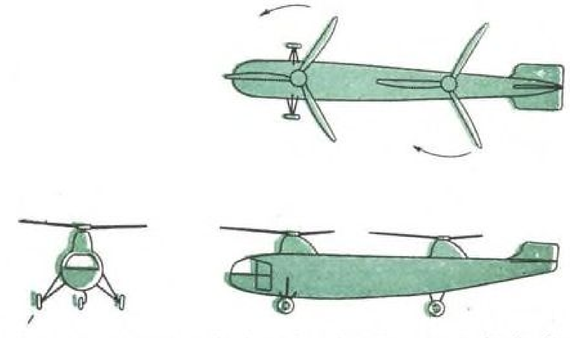


Fig. 7. Bi-axial type craft shown here has rotors longitudinally disposed, in contrast with rotors shown in Fig. 5.

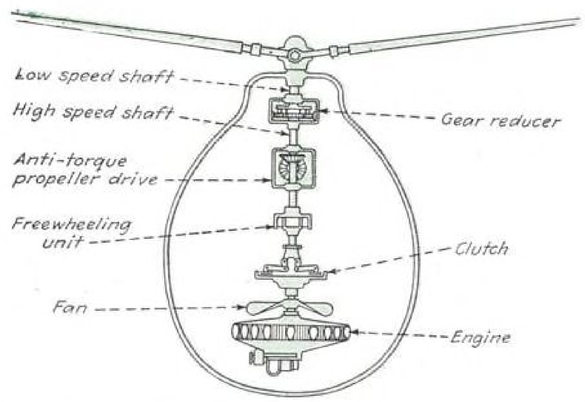


Fig. 8. One form of transmission for single-rotor helicopter showing freewheeling unit between clutch and anti-torque propeller drive. (Swashplate is not shown.)

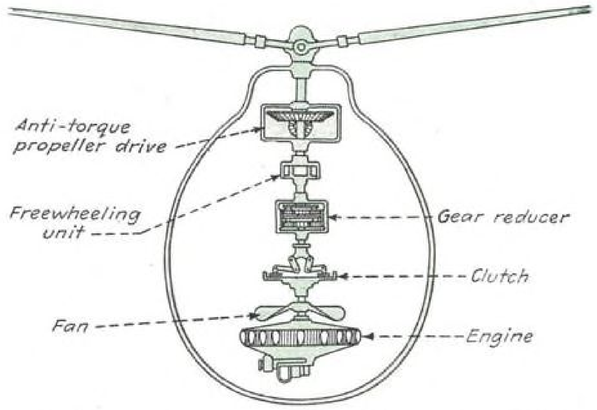


Fig. 9. Transmission arrangement depicted here has gear reduction unit interposed between clutch and freewheeling unit. Drive to anti-torque propeller is geared directly to rotor.

Fig. 10. Freewheeling unit is positioned here between engine and clutch. Freewheeling unit, clutch, and bevel gear drive to anti-torque propeller are all located on high-speed shaft.

Fig. 11. Engine crankshaft is shown horizontally disposed, and anti-torque propeller drive is between freewheeling unit and clutch. Arrangement is not considered practical.

Fig. 12. Depicted are two engines with crankshafts horizontal. Freewheeling unit is between engine and other transmission units.

Fig. 13. Shown here is driving mechanism from single engine to bi-axial rotors, a typical arrangement for this type helicopter.

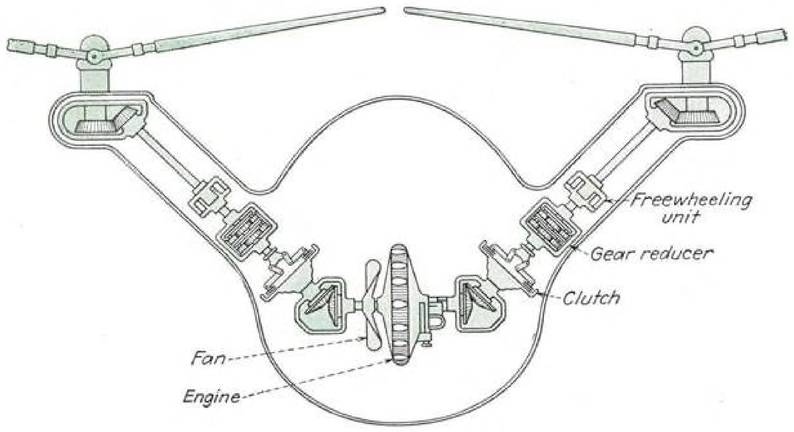


Fig. 14. Another basic arrangement for bi-axial transmission with use of single engine. (It is advisable that both clutches be simultaneously applied).

10 show three arrangements wherein the engine is mounted so that the crankshaft is parallel and concentric to the rotor drive shaft. This puts all of the mechanical units on the centerline of power drives and provides a unique, compact arrangement of the various elements.

In Fig. 8, it will be noted that the engine is located in the lower part of the fuselage. Next comes the fan for cooling the engine, followed by the clutch, then the freewheeling unit, a pair of bevel gears to provide a drive to the anti-torque propeller, and finally the gear reducer.

This arrangement has several advantages and disadvantages. It will be noted that the freewheeling unit and the clutch are located on the high-speed shaft. This is good design and reduces the weight of the parts.

It is also to be noted that in event of reduction gear failure, the anti-torque propeller and the rotor are still geared together, although the rotor system freewheels between the bevel gear drive and the clutch. The objectionable feature of this arrangement is that the rotor must drive the anti-torque propeller through the speed reducer during the autogyration. If stalling of the engine is caused by jamming of a broken gear reducer, the rotor system would either be slowed down, or, if there were enough kinetic energy the gear reducer would be ripped apart, causing disconnection between the rotor and anti-torque propeller.

Obviously, then, an arrangement as shown in Fig. 9 would tie together the rotor and the anti-torque propeller, and should the engine stall, freewheeling would be possible between the gear reducer and the drive to the anti-torque propeller.

The objectionable feature to this arrangement is that the freewheeling unit must be mounted on the slow-speed shaft and hence will be somewhat heavier in the design characteristics which result.

The same objectionable features apply to the positioning of the anti-torque propeller drive; namely, that it is on a slow speed shaft, gears would be larger, and, also, the reduction would require a fairly high ratio of miter gears.

Fig. 10 shows still another arrangement for locating the freewheeling unit. Here, the freewheeling unit, clutch, and bevel gear drive to the anti-torque propeller are all located on the high-speed shaft, an ideal arrangement from point of view of reduction in weight. In event of engine failure, the rotor will drive the anti-torque propeller through the speed reducer, and furthermore it will spin the clutch unit at maximum speed. It is considered that the flywheel effect of the clutch rotating at high speed, would have a beneficial effect rather than a tendency to dissipate the energy in the rotor.

Fig. 11 shows an arrangement in which the engine is located with the crankshaft in a horizontal position, which may be termed standard or conventional. As the rotor drive shaft is, of necessity, disposed on the vertical axis, it is apparent that the power to the rotor must be transmitted at right angles through some form of bevel or miter gears. This would introduce another pair of bevel gears of heavy load in addition to the mechanism previously described, but, since the anti-torque propeller drive is also horizontally disposed, it may be driven directly from the engine by interlocking with the horizontal shaft.

Here again the relative positions of the freewheeling unit, clutch, and the speed reduction unit are a matter of design.

Fig. 12 shows an arrangement of two engines with crankshafts horizontally disposed. This illustrates a means of imparting combined power of two engines to the rotor and whereby one engine may continue to drive if the other fails. The freewheeling unit is located between the engine and the other transmission units.

In Fig. 13 we have the driving mechanism from a single engine to bi-axial rotors. It will be noted that in this arrangement the elements previously described are utilized. A variation of this arrangement may be had by rearranging the engine and utilizing individual drives to the rotors (Fig. 14).

Examination of Fig. 13 will show that the rotors turn in opposite directions in order to counteract the torque. Furthermore, in event of engine failure, the one freewheeling unit allows

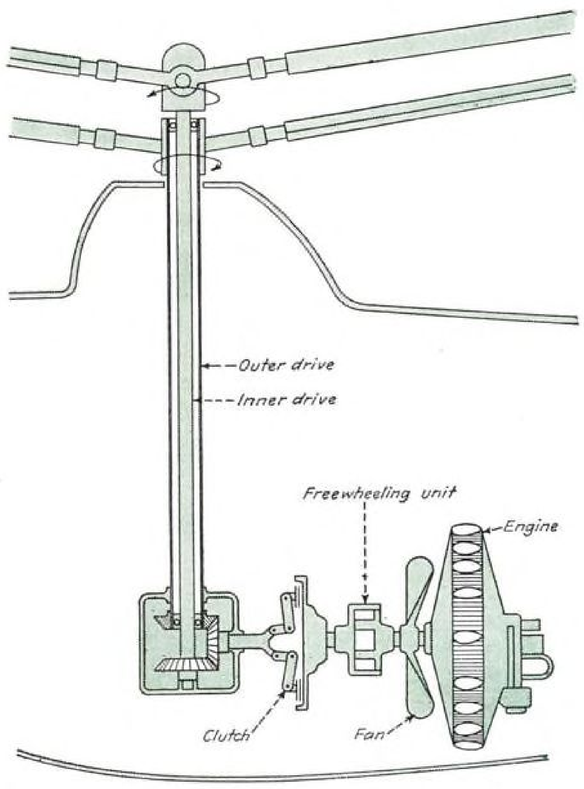


Fig. 15. Typical arrangement for driving co-axial rotors, with engine crankshaft horizontally disposed.

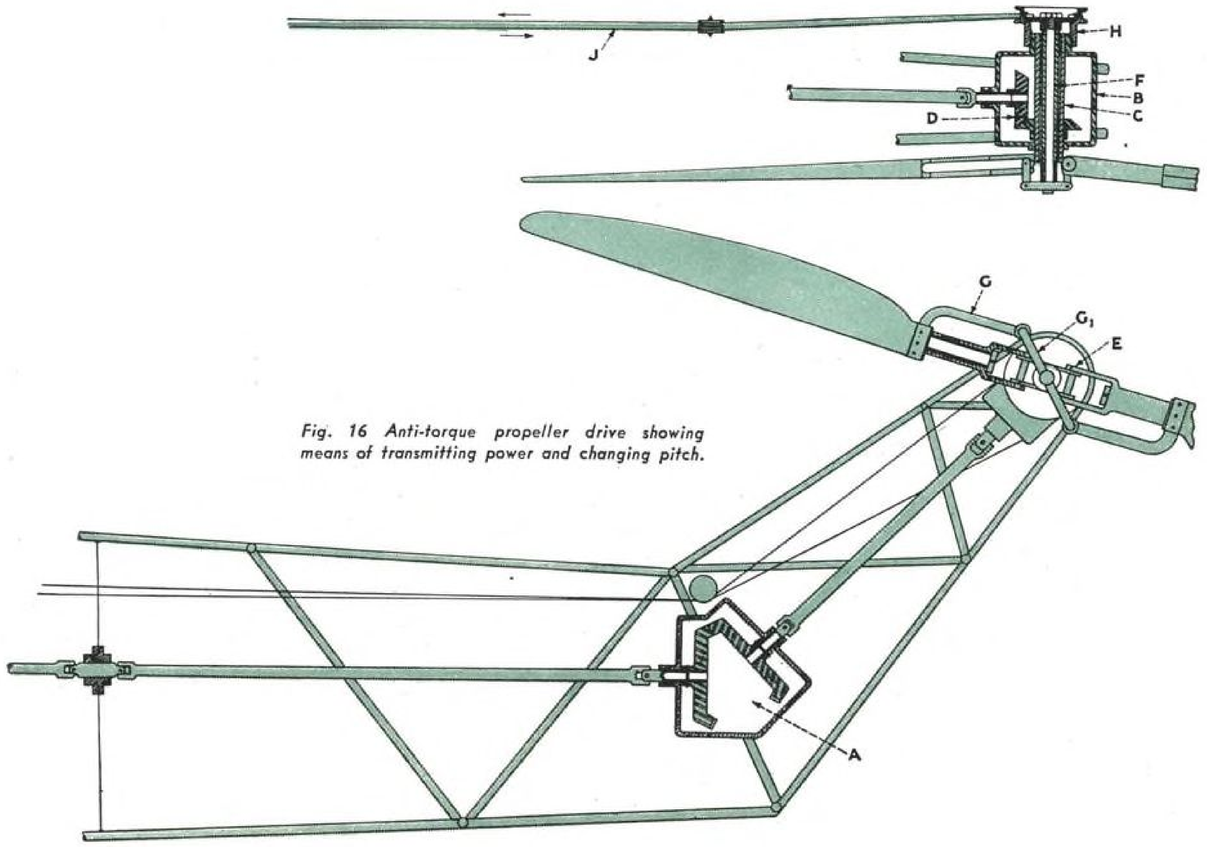


Fig. 16 Anti-torque propeller drive showing means of transmitting power and changing pitch.

both rotors to turn in synchronization. One speed reduction unit and one friction clutch are used for both rotors. Figs. 13 and 14 are basic in principle, for bi-axial drive. Variations in detail design are many, and may be applied by a rearrangement of the several elements previously described.

Fig. 15 illustrates a typical arrangement for driving co-axial rotors. Obviously, the engine could be located either on the forward side of the craft, as shown, or could be disposed with the crankshaft vertical as illustrated in other arrangements. The freewheeling unit and the clutch may be arranged as shown, or in reverse positions.

Anti-Torque Drive

The drive to the anti-torque propeller and its mechanism is illustrated in Fig. 16. The drive shaft may be made up of a number of sections as shown in Fig. 1, and where the angle becomes acute, a pair of bevel gears is introduced as at (A), Fig. 16. Fastened to the end of the airframe is a housing (B) in which rotates an axle (C), driven by a pair of bevel or miter gears (D). The blades are fastened to the end of axle (C) at hinge centers (E), and pitch is changed through the rod (F) and links (G) by means of the threaded cable wheel (H), operated by the cable (J) leading to the cockpit of the ship.

A study of this arrangement will indicate that the operation of the cables (J) will turn wheel (H) which is threaded movably on housing (B) and will move shaft (F) horizontally. Links (G) and (G_1) will cause the blades to change pitch. The same arrangement would be applicable if three anti-torque propeller blades were used.

Swashplate

Referring again to Fig. 1, we note an arrangement (G) located close to the rotor system and commonly referred to as the swashplate (space cam or feathering control mechanism), more fully illustrated in Fig. 17. To understand the purpose of the swashplate, it would be well to discuss basic principles both in vertical and directional flight, as exemplified by such helicopters as built by Sikorsky, Young (Bell), Piasecki, RotaWings, and others.

In vertical flight, upward or downward, a helicopter is dependent upon change of pitch (angle of attack) of the blades (lifting screw). In vertical flight, each blade supports an equal amount of load; therefore, a uniform increase or decrease in the blade angle or pitch will govern the amount of lift, and hence, the up and down travel of the craft. The speed or rate of lift change is naturally dependent on proper throttling or regulation of the engine speed.

Referring to Figs. 17 and 18, a pull of the rod (A) in the direction indicated would move sleeve (B) vertically in the direction shown at (C), and vertical rods (D) fastened to levers (D_1), (D_2), and (D_3) would also move vertically and cause turning of all three blades on their span axes for pitch change in the same direction.

By reversing the push on rod (A), a variation in pitch can be subtracted from all three blades simultaneously. The range of angles, in which the blades operate with aerodynamic efficiency, are quite small, and therefore a great movement is not necessary.

For directional flight a new set of conditions occur. In horizontal flight the actual or virtual plane of the rotor is tipped in the direction of desired flight. When tipped forward, the advancing blade will travel faster, in relation to the air, by the added speed of the craft and, conversely, the retreating blade will have a diminished speed in relation to the air.


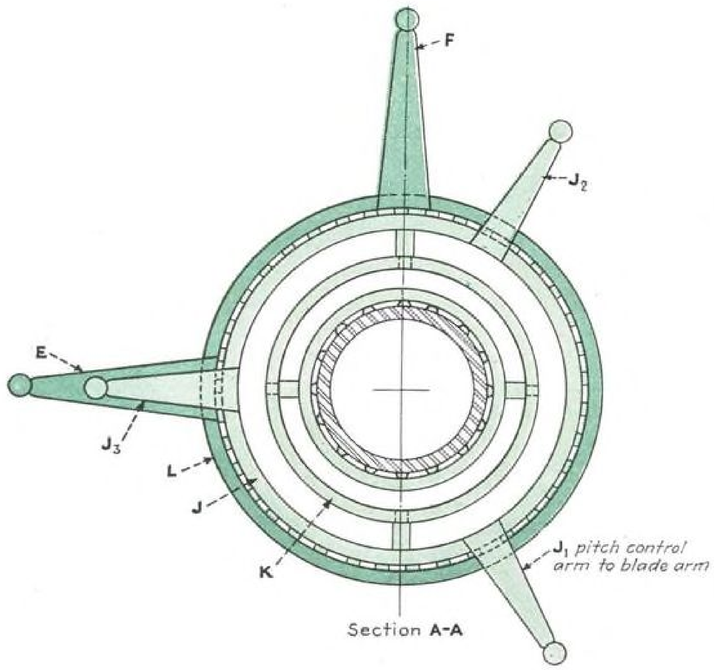


Fig. 17. Elevation and plan views of typical swash-plate design showing method of rotably supporting hub.

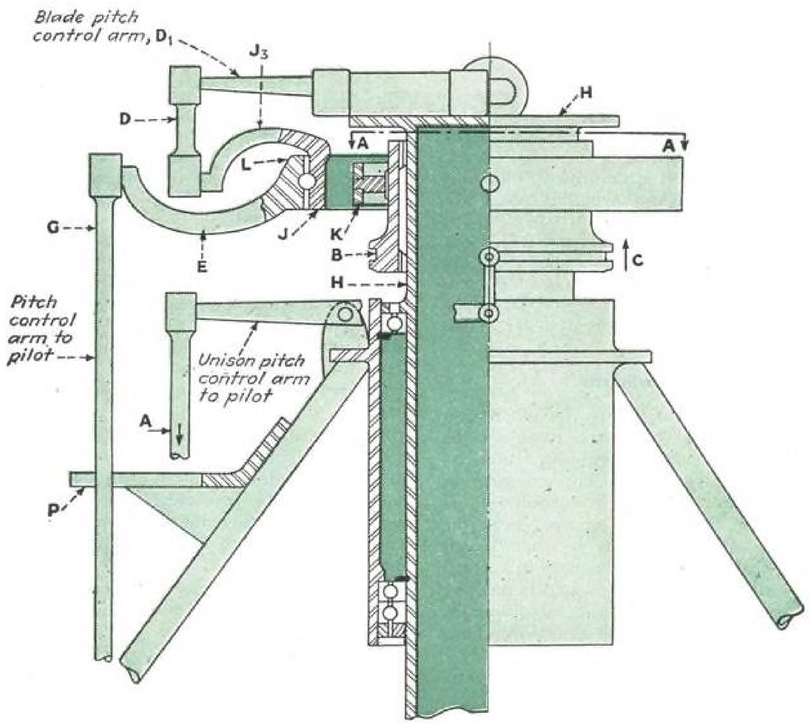

Hence it is necessary to change the angle of attack of the advancing blade by diminishing the pitch, and that of the retreating blade by increasing the pitch, in order to obtain a balanced resultant lift on all blades. Such changes in the relative angle of attack (pitch) of the blade in the complete cycle around the rotor is termed feathering.

Feathering action is obtained by tilting the angular position of the swashplate as shown in Fig. 19. The degree of angular adjustment of the blades will determine the speed of the craft, and the direction of tilting will determine the direction of flight. Tilting of the swashplate is obtained through linkages connecting with arms (E) and (F), as shown in Figs. 17 and 19, through rods (G).

It is possible, at the discretion of the pilot, to tilt the swashplate to a desired angular position for feathering and at the same time cause a simultaneous increase or decrease of pitch in all of the blades.

It will be observed in Fig. 17 that the swashplate is slideably mounted on a spline on the rotor hub axle (H). The spider assembly (J) with three extending arms (J_1), (J_2), and (J_3) is mounted on a gimbal ring (K), permitting universal tilting about longitudinal and lateral axes. The tilting is imparted to the spider through an outer ring (L) held against rotation by means of plate (P), and actuated as previously described.

Fig. 20 is a perspective which illustrates the arrangement of the various elements making up the complete swashplate control for feathering.

Summary

We have discussed, in an elementary manner, the powerplant method of transmitting power, the anti-torque propeller mechanism, the swashplate, and the method for controlling pitch and feathering of the rotor blades.

Summarizing, it is apparent that sound engineering must be directed toward the attainment of: (1) An efficient drive, (2) minimum weight of parts, (3) rigidity in mounting to insure full life of bearings, (4) reduction of transmission noises, (5) proper cooling of engine and transmission, (6) ease of assembly, operation, and maintenance, and (7) safety of the helicopter in all conditions of flight.

Experience has indicated the desirability of a transmission arrangement whereby the various elements may be removed independently of each other. For example, a transmission including the gear reducer, clutch, and freewheeling unit, could be built for removal as an integral unit, as shown in Fig. 1. The engine could also be removed as a separate unit. Likewise, the hub and the rotor system could be independently removable.

The engine transmission unit and the hub could be interconnected with universal joints to obviate the need of assembling the units in perfect alignment. This would also provide smooth operation, should the airframe tend to flex under various loads.

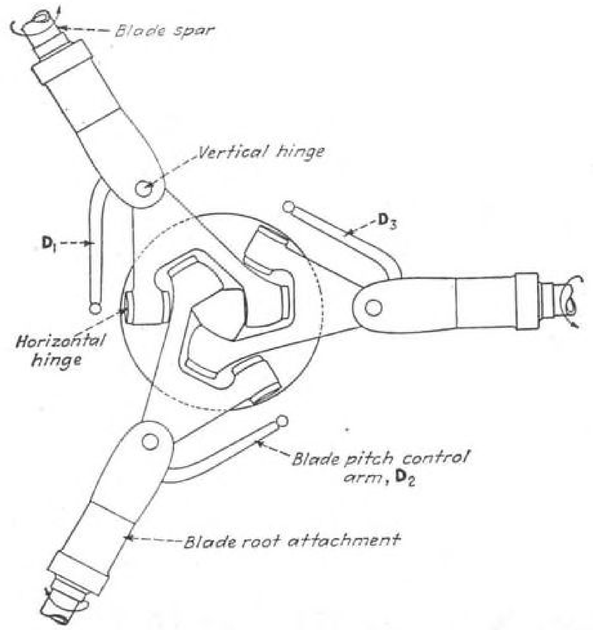


Fig. 18. Plan view of swashplate arrangement illustrating rotor blade attachments and levers for pitch control and feathering.

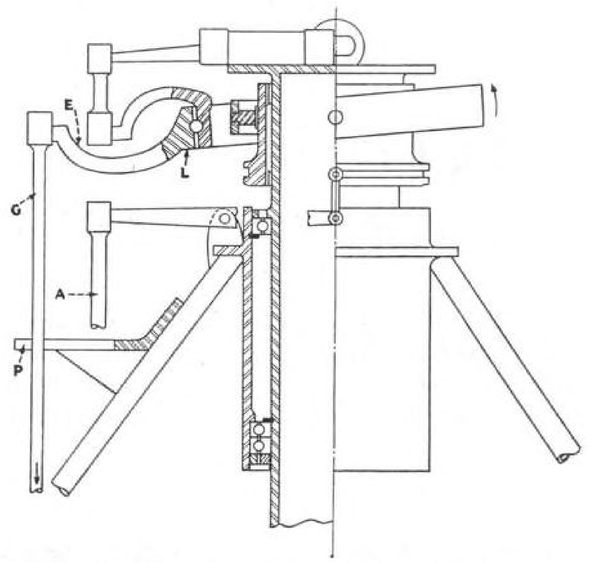


Fig. 19. Illustrated here is swashplate similar to that shown in Fig. 17, but tilted to show swashplate action.

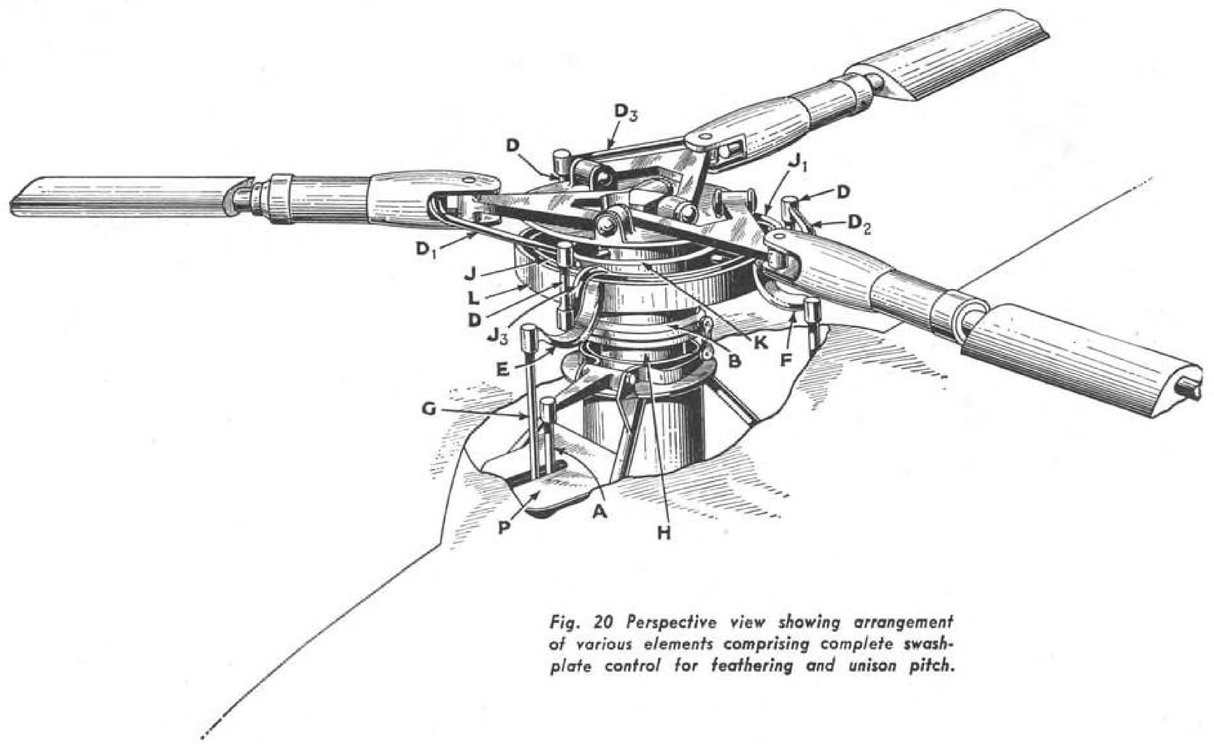


Fig. 20 Perspective view showing arrangement of various elements comprising complete swash-plate control for feathering and unison pitch.

BETTER FUEL TANKS MADE FASTER

Difficulties in long-seam welding of tanks give way before C-W's combination of ingenious jig and Heliarc process. Resultant joint is smooth and stronger than tank skin, and wide peacetime use is foreseen for this fast mass-production welding method.

THE DOCTOR had made that wing-tank order quite clear: The huge cargo transports must have tanks specifically engineered to withstand the full stress and strain and vibration created by engines of thousands of horsepower—tanks that wouldn't leak at the seams no matter what tortures they were subjected to in the operation of the aircraft.

The order was for "fuel tanks with no seams"—in other words with seams stronger than the tanks themselves.

Expert craftsmen and engineers of the welding department of the St. Louis Plant of Curtiss-Wright's Airplane Division were given the job. They believed an adaption of the Heliarc welding process would be the answer.

The baffling problem in long-seam welding for mass production had been that of obtaining a smooth, steady application of the torch to the seam at an exact position above the bead, and at an even forward speed. It was almost impossible for a freehand welder to maintain such constants. Obviously, a form of mechanical straight-jacket was needed.


After months of study and experiment, Curtiss-Wright perfected a jig to hold the tank and to control the two primary factors of welding head forward speed and position above the seam.

In this jig was incorporated an overhead track from which the welding head was suspended in an inverted position, swung on wheels, and operated by a small motor which powered the forward movement of the head. Along this track the welding head could be moved at any predetermined speed up to several feet a minute.


There were many primary variable elements to be taken into consideration and solved for mass production welding. Some of the more important included speed of the welding head, electrode diameter, length of arc and distance from bead, dimensions of filler strip, flux condition, flow of helium gas around electrode, temperature of back-up bar and clamps, fit-up of materials, and tensions. To correlate these factors required painstaking months of tests and study.

Experiments determined these fixed conditions: A forward speed of 1 ft. per min.; an amperage setting of from 76 to 85, depending on the welding machine used; and an arc length of $\frac{1}{16}$ in., the electrode riding .048 in. below the top of the filler strip which burned down ahead of the electrode. The electrode diameter was determined at $\frac{1}{4}$ in. as the ideal size for this operation. The filler strip, of the same 52S-$\frac{1}{2}$H as the base metal to be welded, was fixed at .081 in. thick and $\frac{1}{4}$ in. wide.


A very light application of flux was determined, the solution being painted on the weld surface in sufficient amount to permit seeping through to the underside

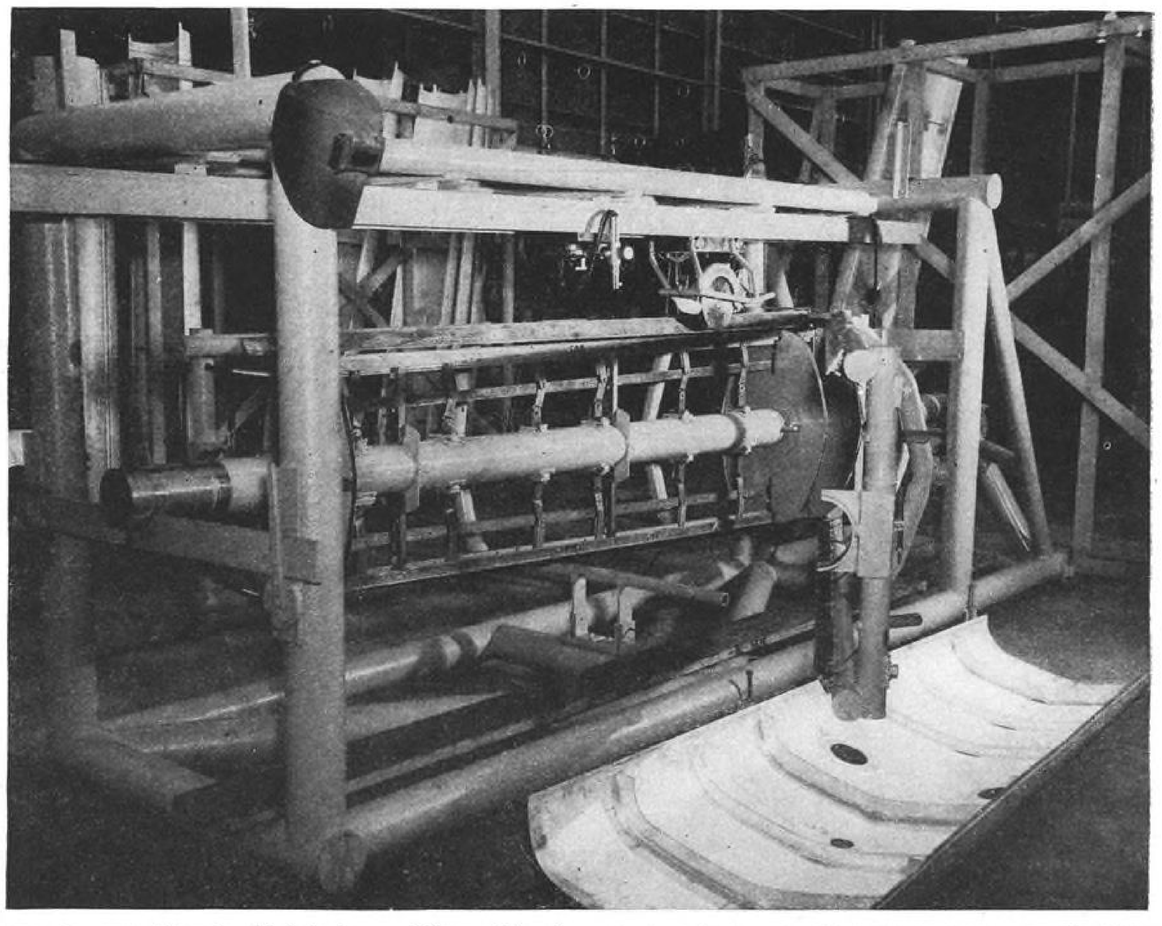

Shown here is jig designed and built for long-run Heliarc welding of plane fuel tanks. One side section of tank is shown on floor ready to be clamped in jig against identical section for opposite side. Welding head and circular saw employed are shown on overhead track.

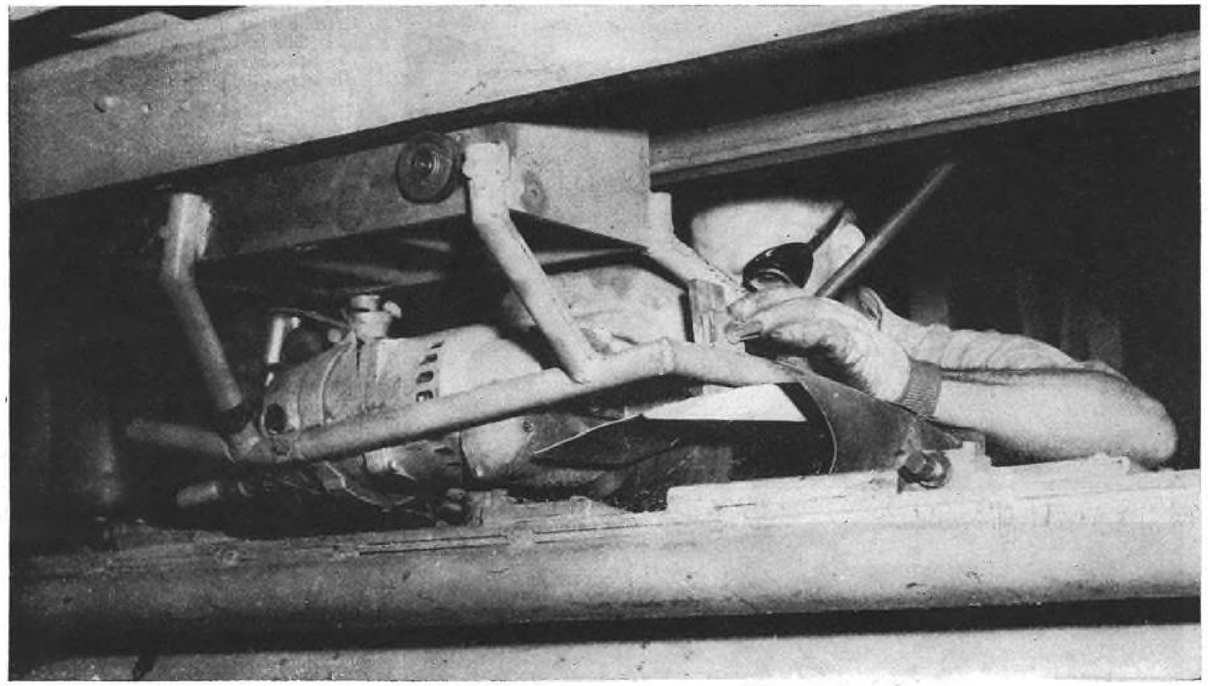


Operator saws slot in top of joined sections of tank into which filler strip for weld is inserted. Slot, exact width of strip (.081 in.), automatically aligns joint and eliminates stress between sections to be welded.

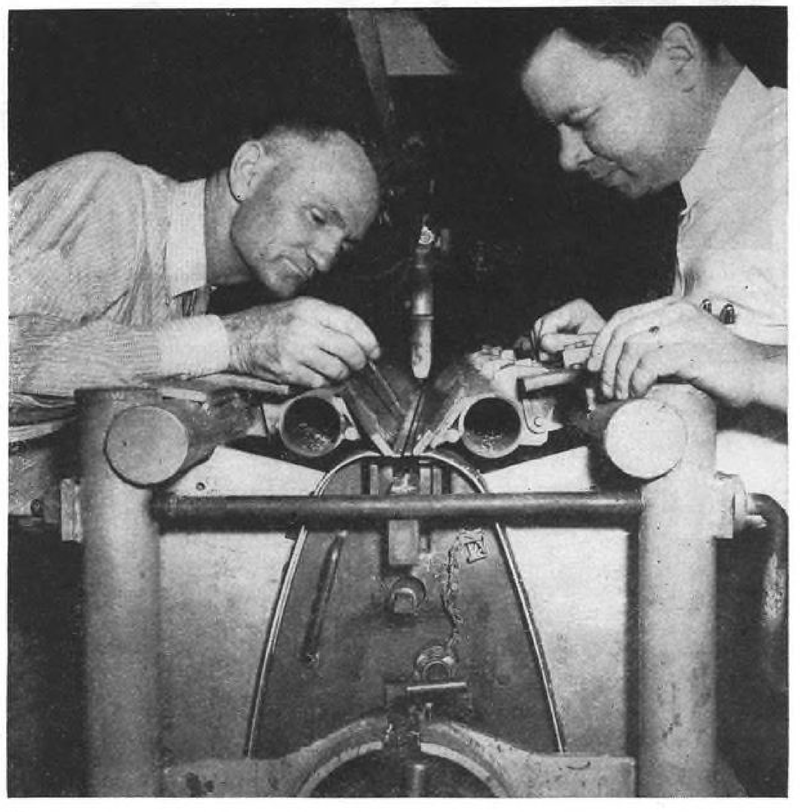


Seen inspecting sawed slot are E. F. Lohmann (right), general foreman of Curtiss-Wright St. Louis plant welding department, and I. C. Young, assistant general foreman. Note clamp bars which hold together two side sections of tank for welding, and welding torch with helium gas nozzle above electrode. Young points to slot which receives filler strip.



Inserting filler strip of base metal aluminum (.081 in. by 1/4 in.) into slot between two skin sections. Note clamps which hold skin sections in position.

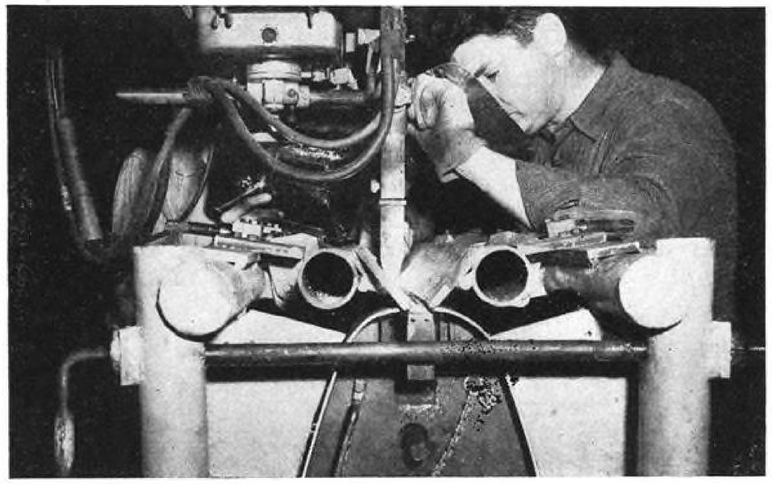

This is start of process. Welder is shown controlling height of electrode above weld surface. Welding head moves forward 1 ft. per min. along 10 ft. bead to be welded. Note back-up bar in place on underside of weld.

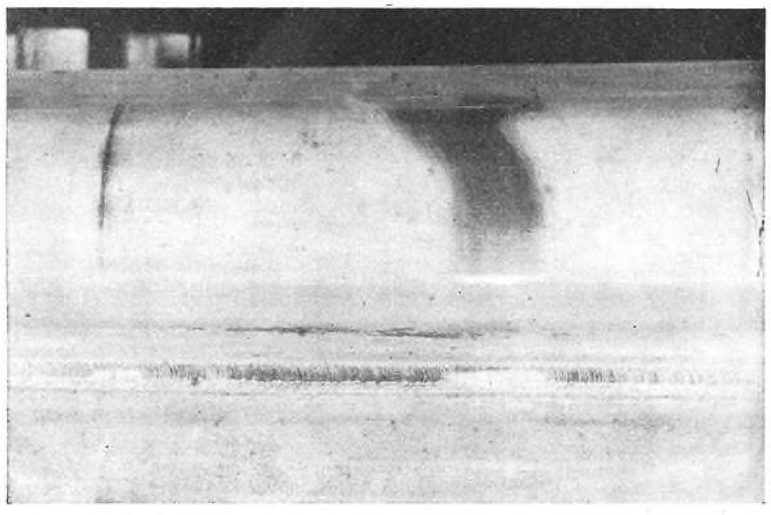

Finished Heliarc long-run weld is smooth, shiny seam, of uniform width and thickness, giving added strength for entire length of tank.

of the filler strip. Alcoa No. 22 (pink powder) flux was used.

The flow of helium gas, breathed around the electrode through a surrounding nozzle, was 8 liters per min. No regulation of the temperature of the back-up bar or clamps was necessary, the heat generated in line production proving sufficient for that factor. Only a light pressure was found necessary for the clamps and back-up bar against the tank skins to be welded.

Two 10-ft. skin sections making up the side walls of the tank are positioned and clamped in the jig. A circular saw, which travels on the same overhead trolley as the welding head, moves the length of the tank, cutting a slot .081 in. wide where the two sections come together. This sawed groove automatically "justifies" the two sections, holding them clamped in position .081 in. apart, the exact dimension of the filler strip. The filler strip is then placed in this opening, extending .048 in. into the groove in the back-up bar—the same distance it protrudes above the base metal on top.

The welding head is then moved to the end of the tank, a light application of flux is made, and the power applied. The welding head moves the electrodes along the bead, the welder maintaining the electrode at the predetermined distance above the bead by a handwheel adjustor. Variation from side-to-side is also controlled (by means of another handwheel adjustment).

The weld for the 10-ft. sections requires approximately 10 min. for each side—1 ft. per min. being the forward speed of the welding head.

Reversing the tank in the jig to weld the other side requires but a few seconds. The sawing of the slot is repeated, the slot and general weld surface is cleaned by a power brush and compressed air hose, the filler strip is inserted, the flux is applied, and the job is again ready for the welder, the entire preparation requiring less than 5 min.

The second side weld completed, the tank is then ready for insertion of the interior baffles, the tank filler cap assembly, drain cocks, etc., before the end sections are welded by freehand method.

The long-seam Heliarc weld is a smooth, bright bead, approximately 25 percent thicker than the tank skin itself. Loss of an approximate 10 percent hardness in the welding is offset by a gain in tensile strength in ratio to the added thickness of the welded seam.

The operation of the Heliarc welding method with the jig setup is simple, fast, and economical, and foreseen is a wide peacetime adaption in the manufacture of aluminum alloy products.

Further developments with the process are under way in Curtiss-Wright's St. Louis plant welding department laboratories.

Analysis of Continuous Beams Having Variable Moments of Inertia

By **DONALD A. DuPLANTIER,** *Chief of Structures, Nashville Div., Consolidated-Vultee Aircraft Corp.*

Presenting a comparison of the conventional (constant I) and general (varying I) forms of the theorem of three moments for the more unusual conditions of beam loading.

THE USUAL FORM of the equation expressing the theorem of three moments is based on the assumption that the moment of of inertia of the continuous beam is constant within each span, though it may vary from span to span. There are occasions in the design of aircraft structures when it becomes necessary to analyze a continuous beam whose moment of inertia varies within each span. A procedure frequently used in such cases is to compute the arithmetic mean of the end moments of inertia in each span and then to analyze a substitute beam with constant moments of inertia equal to these mean values.

It is evident that such procedure gives approximate results, and the percent of error introduced is both unknown and unpredictable by inspection, sometimes being well over 20 percent. It is, of course, evident that no analysis can be more accurate than the basic assumption of loading characteristics and safe allowable stresses, but it would appear logical and reasonable to strive to eliminate, where practicable, intermediate approximations which are sources of error, since these will not necessarily neutralize each other but may accumulate to decrease the apparent margin of safety.

In line with this premise, the equation of the theorem of three moments has been modified to make it applicable to a beam whose moment of inertia is variable and, in its generalized form, it can be used to analyze any continuous beam, once the proper continuous-beam factors have been determined.

If the moment of inertia I in a given span can be expressed as a continuous equation, it is mathematically possible to obtain precise equations which will determine the values of the modifying coefficients. However, such equations become too cumbersome for practical use in essentially all cases but one—namely, where the equation for I is of the form: $y=(ax+b)^2$.

In all other cases it is much easier, and sufficiently accurate, to determine the coefficients by mechanical integration rather than by mathematical integration.

Fortunately, however, in aircraft structures the majority of beams with variable moments of inertia fall into the type of beam whose flanges are constant, whose depth tapers in a straight line, and whose web is very thin, with a negligible moment of inertia. Consequently the equation for I assumes the form: $y=(ax+b)^2$, as previously mentioned.

A comparison of the conventional (constant I) and general (varying I) forms of the theorem of three moments will now be presented for the more usual conditions of loading. The modulus of elasticity E is assumed constant, throughout. The terminology used will be as follows:

A, B, C,=Three adjacent beam supports in sequence, left to right.

M_a; M_b; M_c=Beam moments at A, B, C.

I_a; I_b; I_c=Moments of inertia of beam at A, B, C, when I is varying.

L_1; L_2=Lengths of spans 1 and 2.

I_1; I_2=Moments of inertia of beam in spans 1 and 2 (constant I).

$\alpha=L_1/L_2$.

$\theta=I_1/I_2$ or I_a/I_c whichever applies.

Case 1: Uniformly Distributed Load (Fig. 1).

Case 1(a): Constant I.

$$\left(\frac{L_1}{6I_1}\right)M_a+\left(\frac{L_1}{3I_1}+\frac{L_2}{3I_2}\right)M_b+\left(\frac{L_2}{6I_2}\right)M_c=-\frac{W_1L_1^2}{24I_1}-\frac{W_2L_2^2}{24I_2} \quad (1)$$

$$\text{or: } \alpha M_a+2(\alpha+\theta)M_b+\theta M_c=-\frac{L_2}{4}(W_1\alpha^2+W_2\theta) \quad (1a)$$

Case 1(b): Varying I.

$$\left(\frac{C_aL_1}{I_a}\right)M_a+\left(\frac{C_bL_1}{I_a}+\frac{C'_bL_2}{I_c}\right)M_b+\left(\frac{C_eL_2}{I_e}\right)M_c=-\frac{C_1W_1L_1^2}{I_a}-\frac{C_2W_2L_2^2}{I_c} \quad (2)$$

$$\text{or: } \alpha C_aM_a+(\alpha C_b+\theta C'_b)M_b+\theta C_eM_e=-L_2(C_1W_1\alpha^2+C_2W_2\theta) \quad (2a)$$

It is evident, by inspection, that Eq. (1) and (2), or (1a) and (2a), are in identical form and the modifying continuous-beam factors C_a; C_b; C'_b; C_e; C_1; and C_2 in Eq. (2) assume the values of 1/6, 1/3, 1/3, 1/6, 1/24, and 1/24, respectively, when applied to a beam of constant I (constant within each span).

It is also evident that the left hand side of each equation depends only on the elastic qualities of the beam and will be the same for any type of loading, whereas the right hand side must change with the loading. Therefore, to avoid repetition, in subsequent equations the left hand side will be designated by LHS(1), LHS(1a), LHS(2), LHS(2a), as the case may be.

Case 2: Uniformly Varying Load—varying uniformly from zero at outer support to a maximum at inner support (Fig. 2).

Case 2 (a): Constant I:

$$\text{LHS (1)}=-\frac{2}{45}\left(\frac{W'_1L_1^2}{I_1}+\frac{W'_2L_2^2}{I_1}\right) \quad (3)$$

$$\text{or: LHS (1a)}=-\frac{4L_2}{15}(W'_1\alpha^2+W'_2\theta) \quad (3a)$$




Fig. 1. Diagrammatic representation of uniformly distributed load.




Fig. 2. Uniformly varying load—from zero at outer support to maximum at inner support.




Fig. 3. Uniformly varying load—from maximum at outer support to zero at inner support.




Fig. 4. Diagrammatic representation of concentrated loads.




Fig. 5. Yielding supports showing deflection at A and C with respect to B.

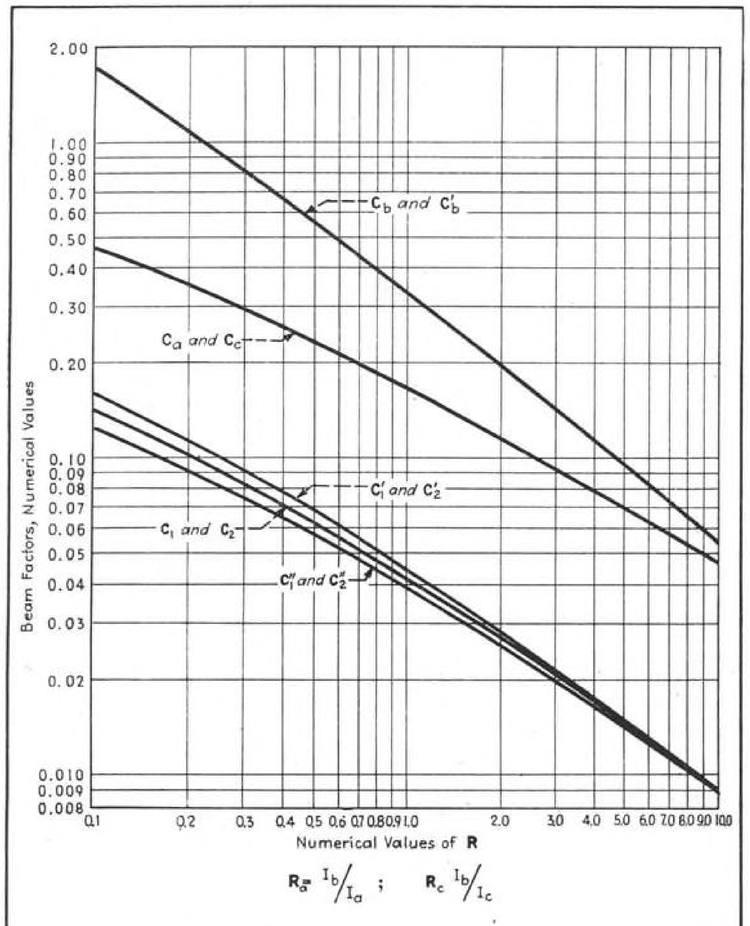


Fig. 6. Logarithmic graphs for determining numerical values of continuous-beam factors.

Case 2 (b): Varying I:

$$\text{LHS (2)} = -\frac{C'_1W'_1L_1^2}{I_a} - \frac{C'_2W'_2L_2^2}{I_c} \quad (4)$$

$$\text{or: LHS (2a)} = -L_2(C'_1W'_1\alpha^2 + C'_2W'_2\theta) \quad (4a)$$

Case 3: Uniformly Varying Load—varying uniformly from maximum at outer support to zero at inner support (Fig. 3).

Case 3 (a): Constant I:

$$\text{LHS (1)} = -\frac{7}{180}\left(\frac{W''_1L_1^2}{I_1} + \frac{W''_2L_2^2}{I_2}\right) \quad (5)$$

$$\text{or: LHS (1a)} = -\frac{7L_2}{30}(W''_1\alpha^2 + W''_2\theta) \quad (5a)$$

Case 3 (b): Varying I:

$$\text{LHS (2)} = -\frac{C''_1W''_1L_1^2}{I_a} - \frac{C''_2W''_2L_2^2}{I_c} \quad (6)$$

$$\text{or: LHS(2a)} = -L_2(C''_1W''_1\alpha^2 + C''_2W''_2\theta) \quad (6a)$$

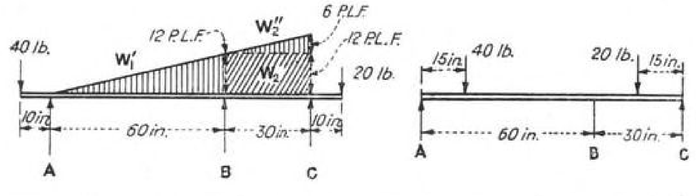


Fig. 7. Diagrammatic representation of loading for illustrative problem No. 1 (See text).

Fig. 8. Diagrammatic representation of loading for illustrative problem No. 3. (See text).

It is to be noted that if one span has Case 2 loading and the other has Case 3 loading, the beam factors applicable to each span-case must be used.

Case 4: Concentrated Loads (Fig. 4).

Case 4 (a): Constant I.

$$\text{LHS (1)} = -\frac{1}{6}\left[\frac{P_1L_1^2n_1(1-n_1^2)}{I_1} + \frac{P_2L_2^2n_2(1-n_2^2)}{I_2}\right] \quad (7)$$

$$\text{or: LHS (1a)} = -L_2[P_1\alpha^2n_1(1-n_1^2) + P_2\theta n_2(1-n_2^2)] \quad (7a)$$

Case 4(b): Varying I.

$$\text{LHS (2)} = -\frac{C''_1P_1L_1^2}{I_a} - \frac{C''_2P_2L_2^2}{I_c} \quad (8)$$

$$\text{or: LHS (2a)} = -L_2[C'''_1P_1\alpha^2 + C'''_2P_2\theta] \quad (8a)$$

Case 5: Yielding Supports (Fig. 5). In the event the supports of a continuous beam yield, so that the supports at A and C deflect a distance δ_{ab} and δ_{cb} with respect to B, in a manner similar to that shown in Fig. 5, bending moments are induced in the beam and can be computed by use of the following formulas, wherein an upward relative displacement is considered as positive, and downward as negative.

Case 5(a): Constant I.

$$\text{LHS (1)} = E\left(\frac{\delta_{ab}}{L_1} + \frac{\delta_{cb}}{L_2}\right) \quad (9)$$

$$\text{or: LHS (1a)} = \frac{6EI_1}{\alpha L_2^2}\left(\delta_{ab} + \alpha\delta_{ab}\right) \quad (9a)$$

Case 5(b): Varying I.

$$\text{LHS (2)} = E\left(\frac{\delta_{ab}}{I_1} + \frac{\delta_{cb}}{I_2}\right) \quad (10)$$

$$\text{or; LHS (2a)} = \frac{EI_a}{\alpha L_2^2}\left(\delta_{ab} + \alpha\delta_{cb}\right) \quad (10a)$$

Continuous-Beam Factors

In all of the preceding equations involving a varying moment of inertia, certain continuous-beam factors have been introduced to account for this condition. The equations for these factors are listed in the appendix to this article, but the numerical values can be determined directly from the logarithmic graphs plotted in Fig. 6, once the governing values of R_a (or R_c as the case may be) have been computed. These ratios are identified by the equations:

$$R_a = \frac{I_b}{I_a} \quad (11)$$

$$R_c = \frac{I_b}{I_c} \quad (11a)$$

It must be borne in mind that the equations of the curves in Fig. 6 are predicated on the relationships expressed by the equations:

$$\text{Span A to B: } I_k = I_a(ak+1)^2 \quad (12)$$

$$\text{Span C to B: } I_k = I_c(ak+1)^2 \quad (12a)$$

In Eq. (12): $a = \sqrt{R_a} - 1$

In Eq. (12a): $a = \sqrt{R_c} - 1$

In both equations, and all subsequent equations, k is a function of the span such that $x = kL$.

Eqs. (12) and (12a) are evidently of the same form as $y = (ax+b)^2$. (See discussion at beginning of article.)

(*Turn to page* 297)

Suspension Mount Controls Instrument Vibration

New principle smothers instrument-damaging impulses by breaking them up, then neutralizing each part in turn—an effective engineering application of the "divide and conquer" axiom.

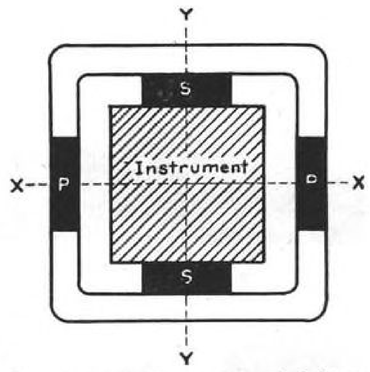


Fig. 1. Suspension principle of Robinson mount. X-X and Y-Y are instrument axes. P-P and S-S are primary and secondary cushions. Each set of pads absorbs vibration in one direction.

VIBRATION, a major factor in the service life and weight of aircraft instruments, can now be controlled.

If there were no vibration to be contended with, design and upkeep of aircraft instruments and radio would be much simplified and their life prolonged far beyond that which is now considered normal.

Unfortunately, however, perfect balancing of moving engine parts and propellers is not possible, although engineers have accomplished remarkable feats in minimizing vibration in these high-speed units.

Since vibration cannot be completely eliminated, the designer has to make a choice between short instrument life or extremely heavy construction, neither of which is desirable in an airplane where light weight and reliability are not only requisite but are considered to be absolutely essential.

The solution to the problem, since vibration cannot be eliminated, is to prevent this destructive motion from reaching the instrument, without adding to the total weight of the equipment any more than is absolutely necessary. The Robinson suspension mount, here described, has been designed to absorb 90 percent or more of all engine and propeller vibration by means of a radically new arrangement of simple components.

Because each unit is designed to suit the weight and vibration conditions peculiar to individual installations, only a general description of the principles of this device can be given.

When a mass such as an instrument panel is supported at, or near, the corners, it has been found that the peculiar type of oscillating vibration present in aircraft will either be transmitted in full or ampli-

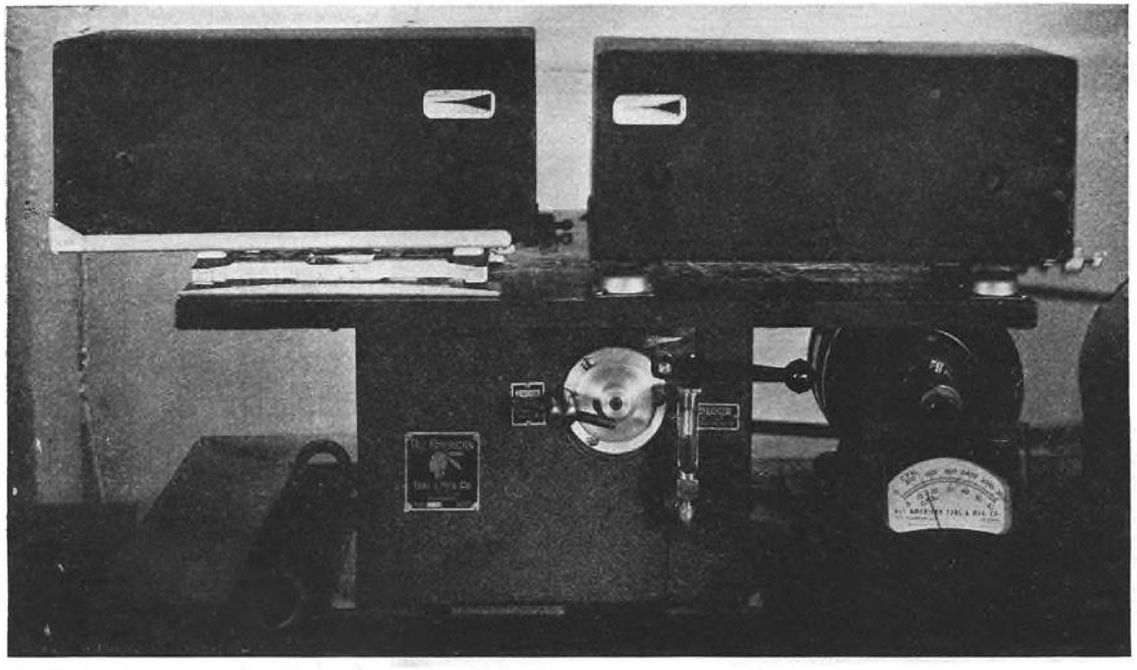


Fig. 2. Robinson mount (left) and corner suspension (right) on vibration table. Vibrometers on sides of instrument cases show comparative motion. Vibration of 15 cycles per second (shown on tachometer) amounts to .060 in.

fied, to the detriment of the instruments. The corner mounts, being at a maximum distance from the neutral axis of the airplane, receive this oscillating vibration in a maximum amount. It has been shown also that longitudinal, lateral, and vertical vibration are present in the airplane structure in equal or variable amounts, and many shock units cannot absorb this multi-directional motion.

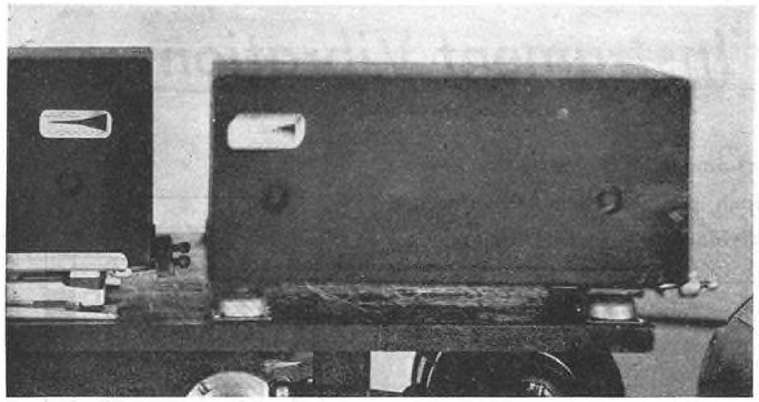


Fig. 3. Same as Fig. 2 but with vibrations raised to 20 per second.

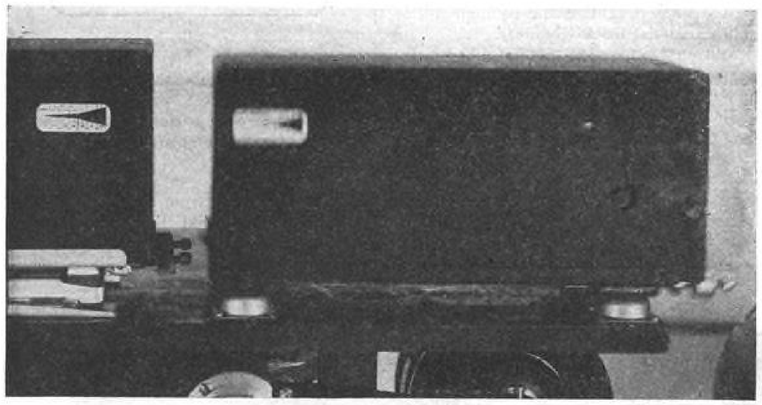


Fig. 4. Same with vibrations at 30 per second.

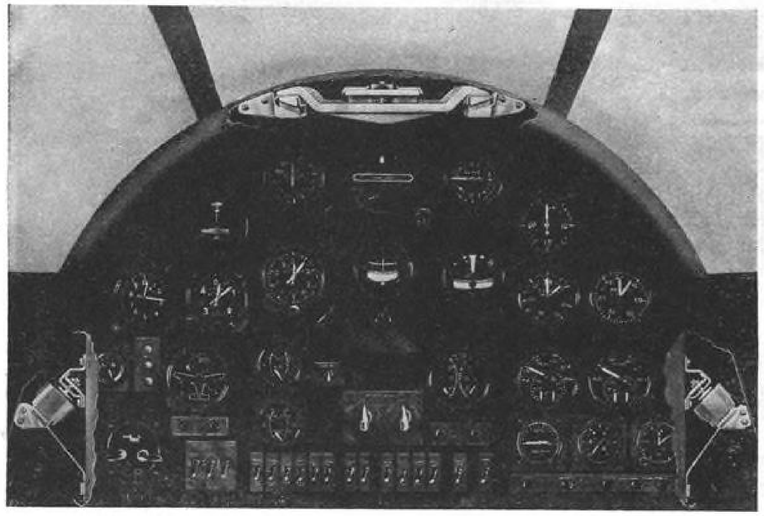


Fig. 5. Cutaway illustration shows vibration-absorbing instrument-board suspension. Panel is suspended from top center, and side fittings are merely for dampening side-sway.

A Robinson suspension carries the entire weight of the panel from a point at, or near, the gravity axis of the airplane and panel, utilizing one set of cushions disposed about the fore and aft axes and another independent set disposed about the lateral axis, thus absorbing oscillations with negligible transmission to the panel.

The dual floating construction used is capable at the same time of absorbing all multi-directional impulses. The obvious answer is that several pads, in series, each with a specific part of the absorption to perform, should be provided, instead of one alone. It is the old story of several specialists being better than a jack-of-all-trades.

Fig. 1. offers a diagrammatic sketch of the principle involved. The instrument in center is supported on its axis *Y-Y* by two sponge rubber blocks *S-S*. These blocks and their frame are in turn supported at the other axis of the instrument by other sponge rubber blocks *P-P* attached to the base of the unit.

Action in absorbing oscillating vibration is as follows: Initial impulses are partly neutralized by the primary cushions *P* which deaden motion about axis *Y-Y* but have little influence on motion about axis *X-X*. Motion about *X-X* is transmitted to cushions *S-S* which, as they have only one motion to absorb, can be made sufficiently lively to do this efficiently, as was also the case with cushions *P-P*.

Consequence is that all oscillating vibration about any axis is neutralized by sets of cushions placed each for its specific purpose. The position of the cushions at (or closely on each side of) the center line of gravity of the unit, prevents either set from transmitting more than an extremely small percentage of torsional vibration.

The usual amounts transmitted are shown in Fig. 2 and 3. Vertical, lateral, and longitudinal vibrations are cared for

(*Turn to page 266*)



Fig. 6. Instrument panel shock-absorbing suspension which will support 60 lb. panel with load factor of 6 G's.


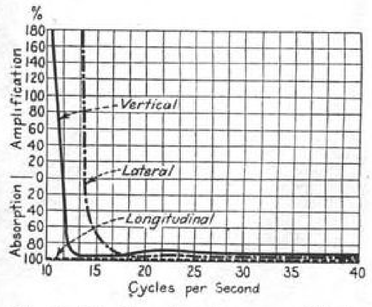


Fig. 7. Vibration absorption curve indicates that practically all vibration is neutralized at normal engine speeds.

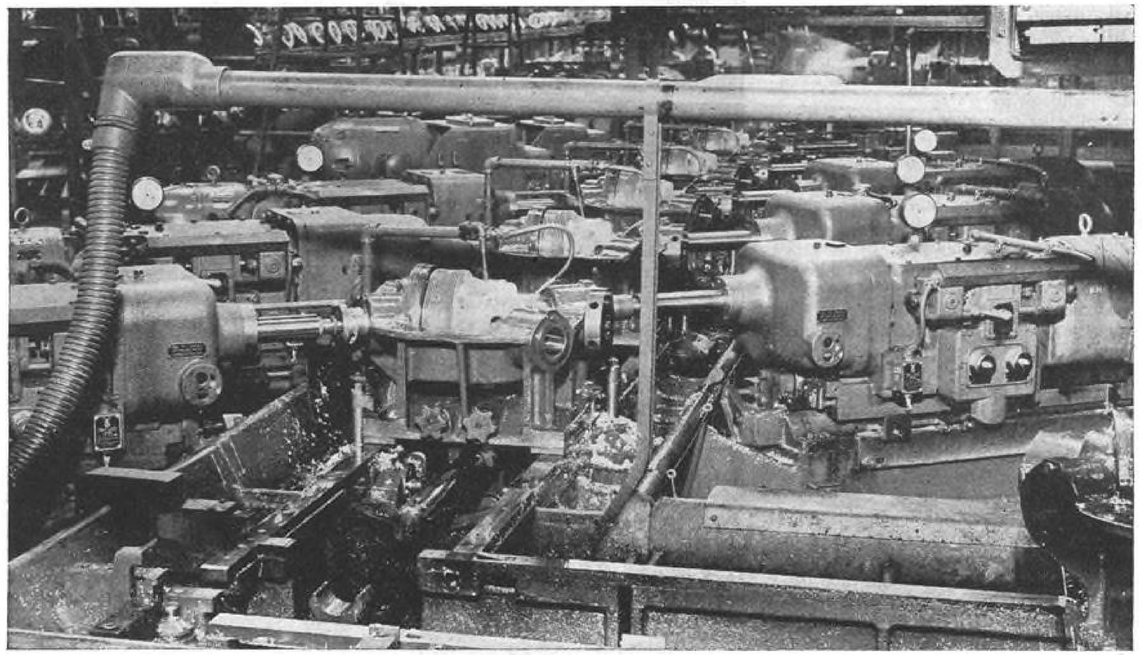

Loading station, with part of one loaded fixture at right. At left center is a fixture in first machining station, and back of it four other fixtures at successive stations. Between ways is one of hydraulically reciprocated bars which shift fixtures from station to station between machining operation. After shift, each fixture is positively positioned by retractable pins.

Mass Machining Features Buick Shortcuts

By HERBERT CHASE

Ever intent on new means to do jobs quicker in less man-hours, this company's production men came up with three machines requiring only 7 operators—to take the place of 36 units and 30 men.

As Buick expanded its capacity, company production men were constantly finding ways of doing jobs faster and with fewer man-hours per piece. This not only has made for economy but aided in meeting labor shortages.

In doing certain operations on Pratt & Whitney cylinder heads at Buick, 15 different machines were formerly used, each with its own fixture. Heads were shifted from fixture to fixture, being clamped and unclamped in each. This involved possible inaccuracies besides the labor of handling. Why not, it was argued, keep the heads in single fixtures, shifting them automatically?

Machines already in use did not lend themselves to such a setup, but since all operations could be done on machines having spindles that feed and return automatically, a maker of such machines was consulted. The result was a single Foote-Burt machine having 16 spindles arranged around a square base along which 18 duplicate fixtures are shifted automatically from station to station until they return to the starting point for unloading and reloading.

This machine handles considerably greater production than was possible in the prior arrangement, at the same time effecting an unusual saving in man-power. It is operated by three men. The individual heads driving the spindles are substantial duplicates and are arranged at an angle to the long sides of the oblong base. Each head is advanced to a fixed stop hydraulically, but the controls are all electric and are concentrated (except for emergency stop switches) in a single control panel on which pilot lights indicate how the respective heads operate.

One man loads fixtures, taking heads from a feeding conveyor at one end of the machine. Another, at the same end, unloads the fixtures and puts the machined heads on another conveyor. The third man watches the machine and stops and starts it manually if necessary.

All fixtures are duplicates and not only position the work but carry bushings for guiding each of the tools used, thus acting as jigs also. Fixtures are advanced by reciprocating bars equipped with latches which, after moving the fixtures to the next station, return and are ready for the next advance. No move occurs until all spindles are withdrawn automatically, when the tools they carry have completed their cuts. Then all the fixtures are moved ahead one station simultaneously.


Fixtures slide on ways, and they are hydraulically locked (after precise locating pins are engaged) before the tools again advance and make their cuts. There is a separate feed bar along each side and each end of the machine, but no operations are performed along the end opposite to that at which loading and unloading is done. At two stations where the cut made is well inside the casting and where a tool piloted in the fixture alone might run out, a ram, carrying a pilot bushing, is advanced inside the casting to engage with a reamer pilot and assure the precision necessary.

The operations performed in this machine include: Machining of valve seats, cutting rocker box clearance, drilling and reaming valve stem guide holes, facing and chamfering valve guide holes, and machining spring seats.


Similar principles are incorporated in another new Foote-Burt machine having ten spindles and taking the place of 15 separate machines formerly used by Buick for spot facing and other machining operations on rocker arm bushing holes. In this case, however, the individual heads are inclined in the vertical plane (because of the angle at which the tools must be advanced in reference to the work) and all the machines are arranged along ways extending the length of one side of the base.

A chain along the other side of the machine returns the fixtures, after they are unloaded, to the loading end. On the way, they pass through a tunnel in which they are washed by jets of coolant to free the fixtures of chips.


In this machine, after loading is done at one end, the fixtures are advanced by a rod with latches, as in the first machine. They pass successively through each machining station and are unloaded by hand at the opposite end. Fixtures are slid across the short ends of the machine by hand. As in the other machine, the head remains in the fixture during all the operations. Pins, inserted by hand and passed through holes previously machined, hold the head in the fixture. Each fixture carries bushings by which it is located positively at each station. A third man (one of two stationed at the loading end) tends the machine and aids in shifting the fixtures transversely. The tools, however,

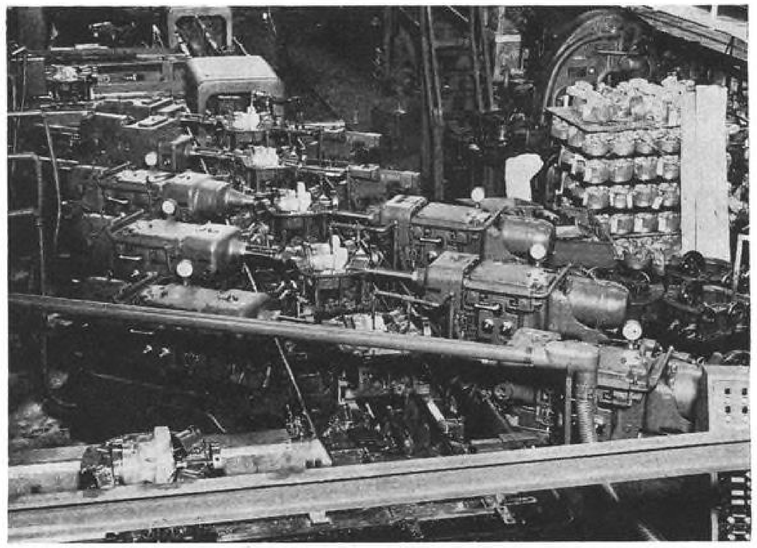


Return side of machine, with fixtures in each of five final machining stations, two farthest of which are those where rams, passing through locating holes, carry pilots for reamers advanced from opposite side. Guide bushings along this side of machine are at alternate corners of fixtures from those used along opposite side of machine.

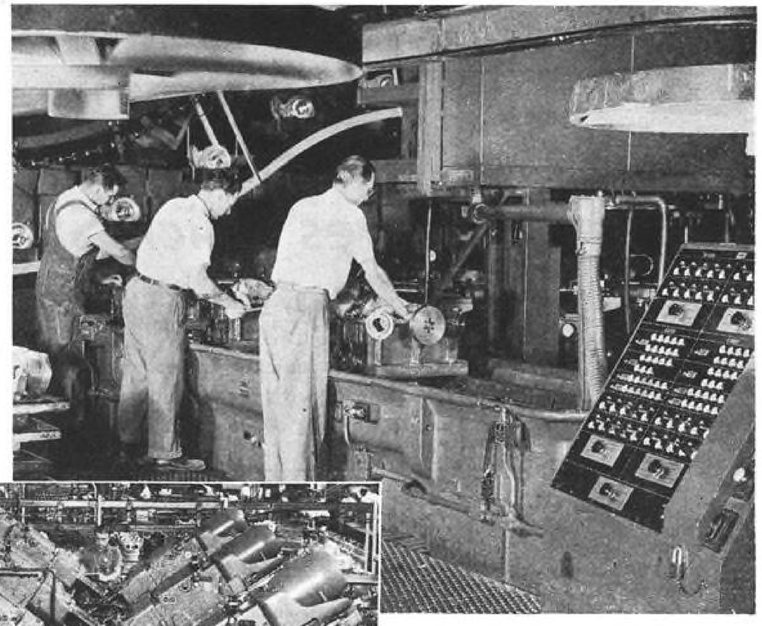

Operators (at right) unload fixtures and reload them, one man handling controls in panel (extreme right) and keeping an eye on functioning of machine as a whole. Conveyors, one of which is seen in background, deliver heads ready for machining and carry away heads that have passed through the machining cycle.

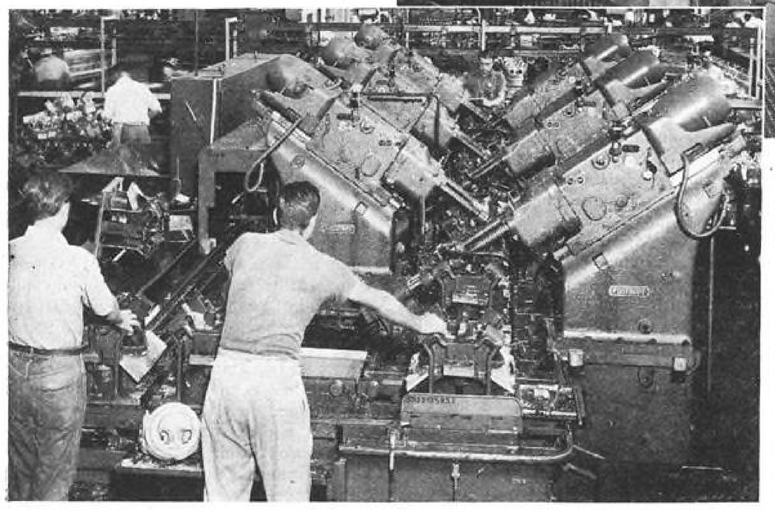


Left: Ten-spindle Foote-Burt machine as seen from loading end. Fixtures at right (except one in foreground which has just been loaded) are at various stations where rocker arm bushing holes are spot faced and otherwise machined. At left is track on which empty fixtures are returned after unloading at far end, the fixtures being sprayed with coolant (in tunnel on way back) to free them of chips.

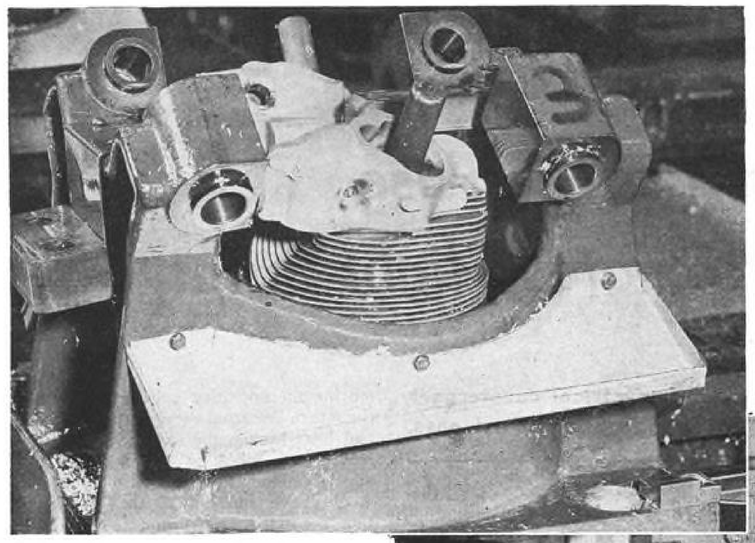

Closeup of fixture employed on 10-spindle machine. Cylinder head is positively located in fixture by removable pins having knurled handles. Bushings of corners of fixture receive pins, advanced by machining heads, to locate fixture and hold it positively at each of the several stations.

Below: Set-up for machining two rear crankcase sections simultaneously while a third is loaded on a dial fixture. Two working stations are at back, and loading station, with casting in place, is at front. Tools of horizontal units feed in automatically from left and right.

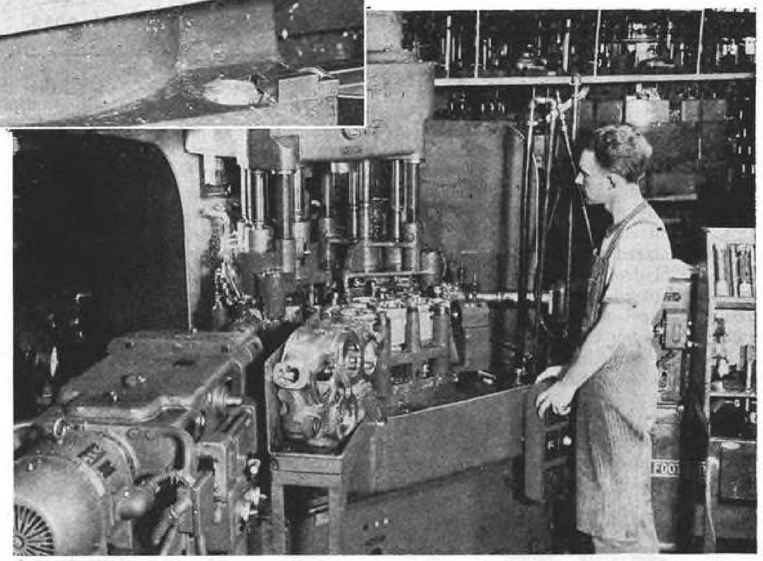


operate automatically in timed relation as the fixtures pause at each station.

Flat rear crankcases are rough bored and core drilled. And five pads, for two guns, a magneto, starter and generator, are spot faced in the third machine which replaces seven machines (radial drills and boring machines). With the new machine, one man takes the place of 6.7 men and handles 18 pieces an hour.

Basically, this machine is a multiple-spindle vertical drill with which are combined two horizontal boring units similar to those in the large machine first described. A three-place horizontal dial fixture is automatically indexed, two castings being in machining positions while the third is being loaded and unloaded. Of the two groups of tools in the vertical head, those at the left open the large holes in the horizontal face of the casting. At the same time, the horizontal spindle at the left is advanced for facing a side boss and boring a hole concentric with it.

While these operations proceed, the right group of vertical spindles bore some smaller holes on the preceding casting, and the horizontal machine at right machines another side boss on that casting. All the tools are advanced and returned hydraulically after cutting to precise depth. The vertical ones are all piloted in a part of the fixture which is lowered with them and is itself piloted on pins of the dial fixture below. There are also pilot bushings for the horizontal tools.

As with the other machines, the part remains in one fixture until completed, and there is only one handling into the fixture and one handling out of it. In this case, however, only three fixtures, all fastened to the dial, are needed.

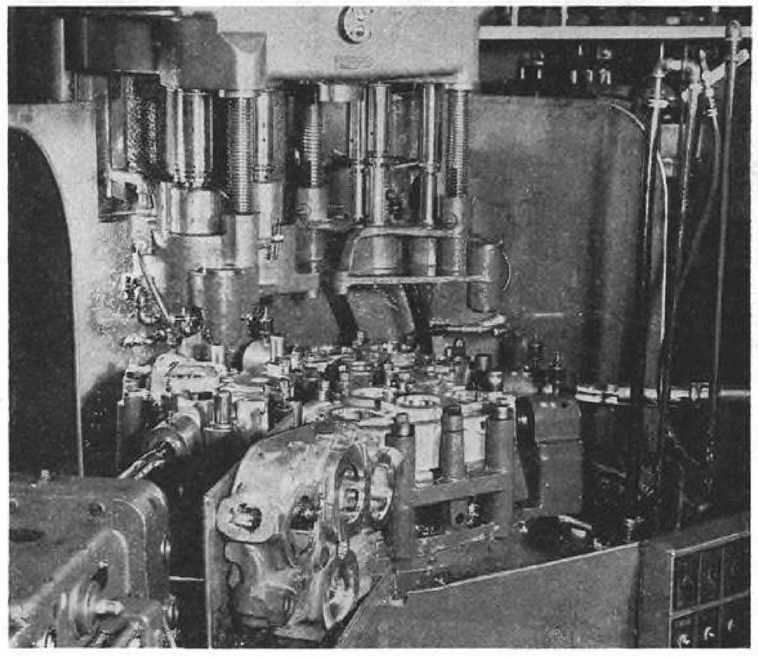

Dial fixture with three castings in place ready for machining, the fourth, in foreground, being ready for loading. Vertical head with bushings for guiding tools is elevated. When lowered, it is piloted by fixture pins from below.

How the Hydraulic Fuse Promotes Flight Safety

Functioning with the same efficiency as its electrical counterpart, unit isolates leaky hydraulic lines without affecting sound ones.

VULNERABILITY of aircraft hydraulic systems is largely due to the fact that when one line is ruptured all the hydraulic fluid may be pumped overboard before the line can be closed off.

Now, however, a device has been developed by the Aeroquip Corp., Jackson, Mich., to correct this condition so that only the damaged circuits fail to function. Called the Hydrofuse (Fig. 1), its action may be compared to that of an electrical circuit breaker which shuts off when trouble occurs but can be reset when the condition is eliminated, thus permitting resumption of functioning of the undamaged circuits.

Basic principle of the device is very simple. Referring to Fig. 2, a check valve (a) is inserted in the pressure line between the power system and the selector valves and serves to prevent flow through the line. Displacement cylinder (e) is in parallel with check valve (a) so that a sample of fluid may be discharged downstream from the check valve even though it be closed. When this sample is directed through a selector valve to an operating cylinder, it moves the piston in that cylinder, thus displacing fluid from the other end. This returning fluid enters a small hydraulic cylinder (b) and moves its piston (g) before escaping through port (c) to the reservoir. The motion of piston (g) is transmitted by push rod (d) to the check value poppet and lifts it from its seat.

Now that the check valve is held open, fluid can flow through it and continue moving the operating cylinder piston. If the return line from the operating cylinder had been broken the sample would have moved the operating cylinder piston a small amount but the displaced fluid would have run out of the break and thus not acted upon piston (g). Therefore, the check valve would not have been opened and flow of pressure fluid would have ceased as soon as the sample was used.

If the pressure line (instead of the return line) had been ruptured, the sample of fluid would have gone overboard and the operating cylinder piston would not have been actuated. Since this piston was not moved it would not have displaced fluid and, consequently, no fluid would have acted upon piston (g) to move it and thus open the check valve.

In the conventional *constant pressure* or *unloader* system, the fuse would be connected as shown in Fig. 3. The pressure fluid must run through the device before reaching the selector valves, and return fluid must traverse it before reaching the reservoir. If all selector valves are closed, there can be no fluid flow and the fuse remains in the "closed" condition. If some selector valve, such as (S), be opened, fluid pressure will be routed to the associated operating cylinder through either line (x) or line (y), the other line carrying return fluid back to the reservoir through the selector valve, and the fuse.

If either line (x) or (y) is broken the fuse will close, but when selector valve (S) is returned to the "off" position, which isolates the broken line, the fuse can be reset and will continue to operate normally on circuits controlled by selector valves (T), (U), (V), and (W).

The fuse would be installed in the *open center* system, as shown diagrammatically in Fig. 4. Since there is a continuous flow through the selector valves in series when they are all in "neutral" position, the fuse will normally stand in the *open* position permitting the flow to continue. If any selector valve is operated, the series passage is closed and the pressure fluid directed to an operating cylinder.

Return from this cylinder continues through the valve, the return line, the fuse, and to the reservoir. Consequently, the fuse remains *open*. If pressure had been directed to a circuit containing a broken line, the fuse would have closed, preventing waste. When the selector valve is returned to *neutral*, broken lines are isolated and the fuse may be reset, allowing other sub-systems to function normally.

It is necessary to be able to reset the fuse after it has shut off. There are several reasons, such as bleeding air from the system, putting the system in operation after fusing, over-riding or forcing a one-way operation even when the return line is ruptured. An example of the latter is the case where the landing gear *up* line has failed and the pilot wishes to extend the gear even though the volume of fluid contained in the operating cylinders is lost.

There are three methods for resetting the Hydrofuse. Simplest and most desirable is the manual method when the fuse is placed in close proximity to the pilot. For this scheme it is only necessary to provide a cable or other attachment to the resetting lever (m) so the pilot may manually reset the fuse.

Second type of resetting is accomplished by connecting a small jumper line, in which a valve is placed, from the *pressure-in* port to the *return-in* port. This permits building up pressure against piston (g) which resets the fuse. A solenoid-operated valve in the jumper line may be desirable, due to the location of the fuse, and some limiting device should be used to prevent the jumper line valve from being held open for too long a time.

Third type of resetting is arranged by placing a jumper line with the valve from the *pressure-in* to the *pressure-out* ports. This jumper line is, in effect, a bypass and will permit operation of any operating cylinder not having a broken line even though the fuse be closed. When the operating cylinder moves it will establish a return flow which will reset the fuse in the normal manner. It is obvious that in the case where the return line is broken, an amount of fluid equal in volume to the operating cylinder displacement may be pumped overboard.

It is necessary that the fuse close promptly if the return line should fail while it is open. In order to achieve this a small amount of leakage must be provided past return piston (g). This is on the order of 20 cu. in. per min. and the fuse will not remain open at smaller return flows. Many hydraulic systems contain lap-fitted valves which may have slight leakage from the pressure side. If the displacement piston were leak-tight it would gradually shut off when used in this type of system.


To avoid this it is made with a leakage of approximately 8 cu. in. per min. to prevent closing at leakages such as might be expected due to "B" nut leaks, packing leaks, or similar seepages. This is a desirable condition, since this loss of fluid —slow and plainly evident—serves as a warning that repairs should be made. But it is not critical.

If either pressure header or return header is broken, the fuse will close, rendering all circuits inoperative with the exception of the brakes, which should be connected upstream from the fuse. If there were no fuse, the fluid would be pumped overboard and no circuits whatever would remain operative. This danger may be minimized by making pressure and return headers as short as possible and installing the fuse with its pressure connection far upstream and its return connection far downstream.

When fluid which traverses the fuse goes to a selector valve controlling the landing gear retraction and the gear is of a type which falls by gravity, it is necessary to use a run-around or cross-flow valve in the landing gear system, and it may be desirable to use a filler check valve in the down line. This is because the weight of the gear will force a return fluid flow while it is falling. Then, before the pump catches up, there may be a period when there is pressure flow with no simultaneous return flow, and the fuse would close. The above suggests a possible means of overcoming this undesirable condition.

The hydraulic fuse is not a panacea for all hydraulic system troubles, but if its limitations are kept in mind by the designer, it will prove to be of incalculable value in preventing crash landings and other accidents and incidents due to the failure of undamaged portions of the hydraulic systems.

Fig. 1. Aeroquip's Hydrofuse. It is 5 in. long and weighs 1.75 lb.

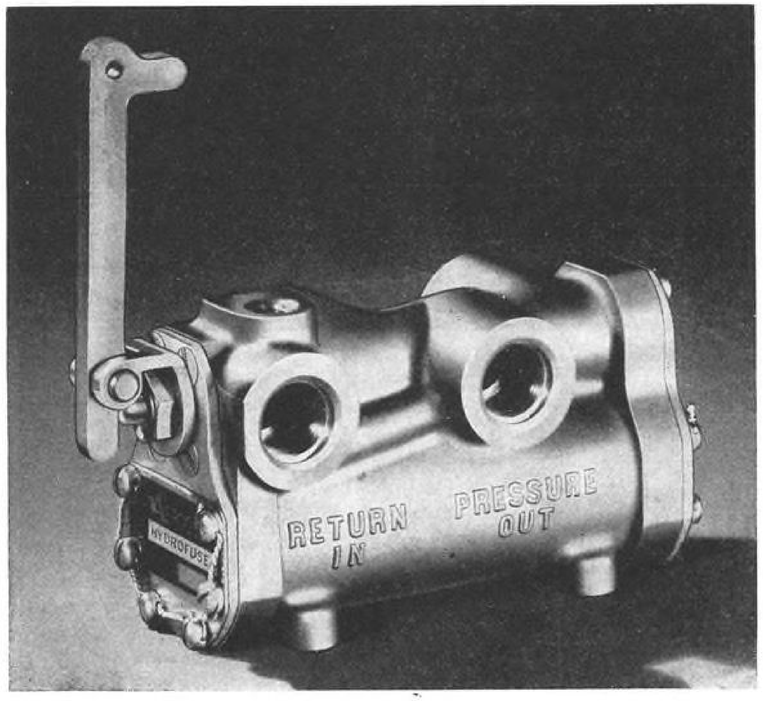

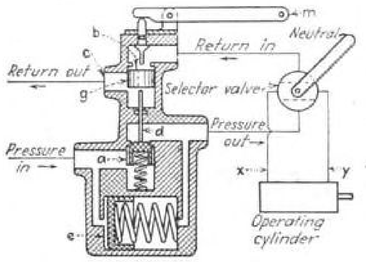


Fig. 2 Diagram of device. Letter references given here are keys to description of operation of fuse (see text).

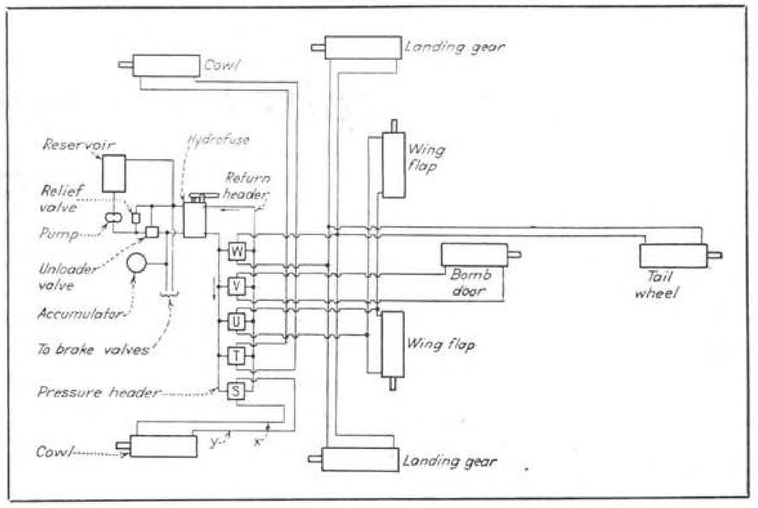


Fig 3. Hydrofuse installed in constant-pressure hydraulic system.

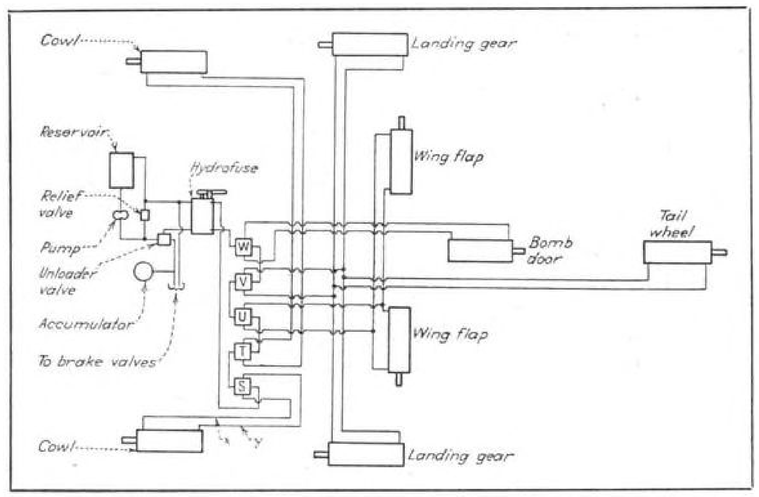


Fig. 4. Connections for device in open-center hydraulic system.

Nomographs Facilitate Sheet Metal Layout

By **B. MATTSON COMPTON,** *Aviation Director, City Schools, Ogden, Utah.*

Complete complement of nomographs speeds layout of flat stock and minimizes chances for error inherent in alternate solutions employing mathematics and trial-and-error method.

NUMEROUS LAYOUT PROBLEMS arise in fabricating sheet metal parts from blueprint stage to completion. These can be solved by conventional mathematics, by trial and error, or by nomograph.

Of the three, nomograph solution has proved itself superior under ordinary conditions. Especially is this true now that there is available a full complement of nomographs or alignment charts.

We can easily see the contrast in the time element, in convenience, in chances for large errors, and knowledge of mathematics required between the use of nomographs and the use of mathematics alone.

To solve layout problems by mathematics requires adequate tables of bend allowance, trigonometric functions, and a working knowledge of trigonometry and algebra, as well as common arithmetic. The more calculations that are performed, the more chance there is for error.

By nomograph, layout problems become routine, requiring selection of the proper formula after which all terms of the formula can be immediately taken from the nomograph.

Nomographs have been used for years in engineering and technical fields. Most satisfactory results are obtained by using a transparent straight edge across the chart connecting the control conditions—then reading the answer where the straight edge cuts across the answer line.

Four charts accompany this article. Two of these—set-back chart (Fig. 1) and the combination B.A. & S. B. chart for 90 deg. (Fig. 2)—are similar to existing charts. The mold-leg chart (Fig. 3) was published earlier, by permission of the author, in an ASC manual. As far as is known, the bend allowance chart is presented for the first time. Practically all layout problems associated with sheet metal can be readily handled with these charts.

Most versatile of the four is the mold-leg chart, which is so useful in obtaining special quantities, such as inside set-back, location of bend layout lines, etc. When used to solve right triangles, the left scale is used for the side adjacent, the right scale used for the side opposite, and the diagonal line for the angle; but the values on the angle scale must be divided by two.

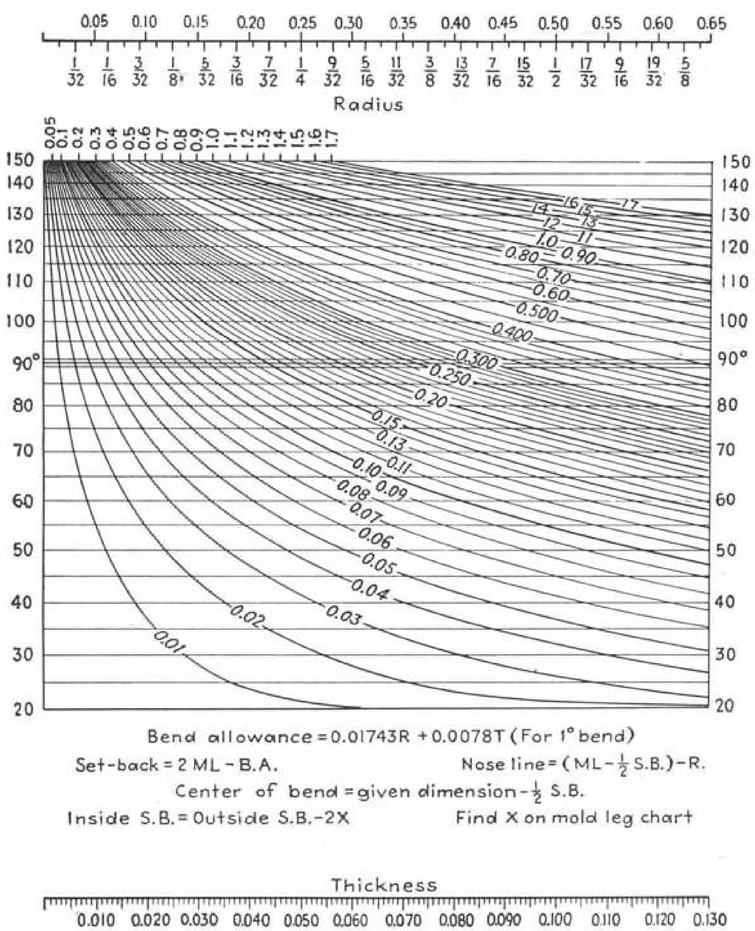


Fig. 1. Set-back chart (outside) for sheet metal work.

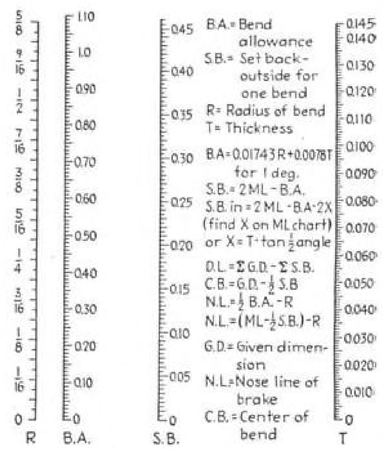


Fig. 2. Combination bend-allowance and set-back chart for 90 deg.

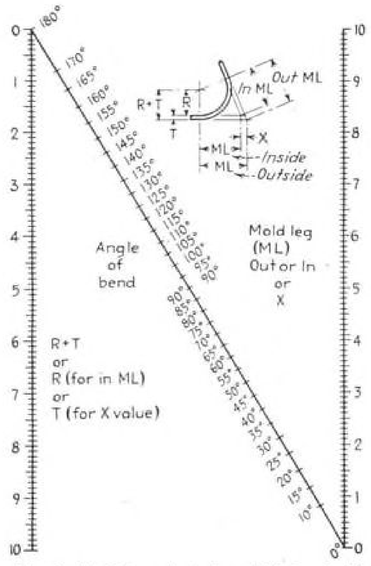


Fig. 3. Mold-leg chart for obtaining inside set-back, location of bend layout lines, etc.

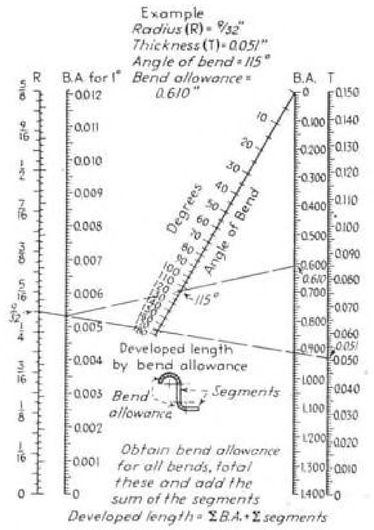


Fig. 4. Bend-allowance chart for 1 deg. through 180 deg. of bend.

For very small angles, the side adjacent and the hypotenuse are practically equal.

Exemplary layout problems are:

1. Developed length and width. It is necessary to determine the flat dimensions of a part in calculating its weight. This occurs in the design stage. More important to the workman, the flat dimensions must be known to permit cutting of stock to such a size that when formed the part will conform to the blueprint. (An example will follow developing the width of the part shown in Fig. 5).

2. Template layout for the part. Important in template layout is determination of where to place bend lines, mold lines, or other lines depicting the bend.

3. Template layout for form blocks. When it is necessary to form a part over a form block, the accuracy of the block controls, to a large extent, the accuracy of the finished part.

A form block properly undercut for spring-back has its mold point at a position different from the part's inside or outside mold point. Since the part is dimensioned to its mold point, the problem devolves to that of finding the distance from the part's mold point to the block's mold point (Fig. 6). (An example will follow).

4. Layout line for aligning the part in the brake. Often this is left to the man in the shop, since different types of brakes require a different bend layout line. In quantity runs, the press brake is almost always used. For small quantities, and in repair shops, the cornice brake or bar folder is often used.

Layout for the bend to be made on the press brake is simplest, since the center of bend is used (Fig. 7). The center of bend, of course, is midway between the bend lines or the mold lines. Layout for the cornice brake is to allow the nose of the brake to be the reference position. Fig. 8 depicts the prime relationship of the factors. Once this relationship is understood, all difficulty of accurate bends in the cornice brake should disappear.

Numerical Examples

1. Developed width. The first step (regardless of which method—set-back or bend allowance—is selected), is to determine all mold point dimensions and angles of bend to an accuracy consistent with the accuracy required for the flat pattern. Generally, it is better that the mold point dimensions be to the same side of the stock making up the part.

Mold Point Dimensions	Angles of Bend
$A = 5/8 = 0.625$	A-B = 90 deg.
$B = 1\frac{1}{2} = 1.500$	B-C = To be found
C = To be found	C-D = To be found
$D = 5/8 = 0.625$	

Our example from Fig. 5 shows the part dimensions to opposite sides of the part in one instance. In practical work this often occurs. To make all dimensions to the same side of the part, we shall obtain the mold point dimensions to the inside mold point of corner B-C and solve for the other parts to be found.

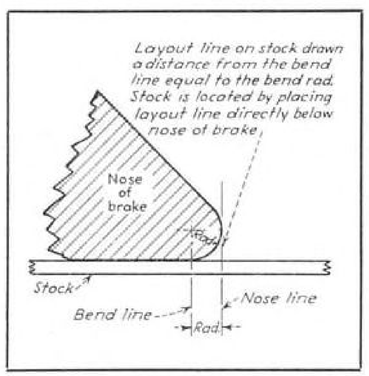


Fig. 8. Bend location for cornice brake.

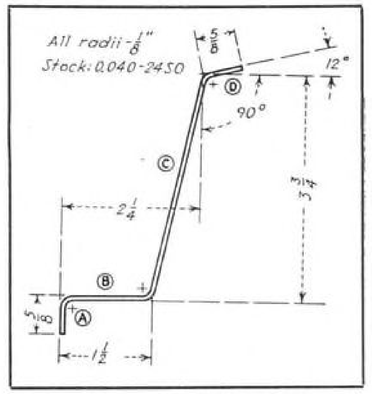


Fig. 5. Dimensions required for width of flat stock before bending.

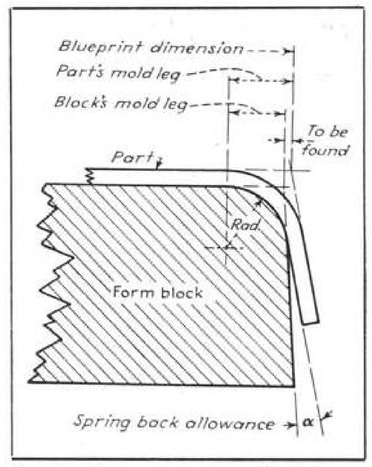


Fig. 6. Sheet metal form block layout

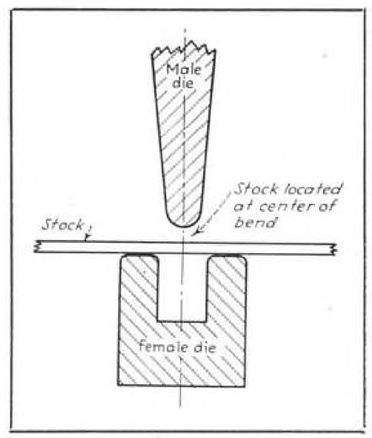


Fig. 7. Bend location for press brake.

It is necessary to know the angle of bend in order to determine mold legs. Use the mold leg chart or trigonometry to determine the apparent angle at corner B-C, then subtract from this the small angle formed by the edge of the metal and the diagonal line connecting the lower and

(*Turn to page* 303)

New Method Banishes Wire-Stripping Risks

Damage to fine strands is averted and much time is saved by new insulation-removing method developed by Fairchild engineers.

FORMEX AND FORMVAR, GE synthetic resin insulation, has almost wholly taken the place at Fairchild Camera & Instrument Corp. of the old style enamel, used where wound insulation would be too bulky.

The new insulation materials have many advantages—being tough, flexible, heat resistant, and proof against practically all liquids which might be used near electrical instruments or small machinery.

These qualities, however, have raised a serious problem for builders of electrical devices using wire insulated by this compound, since its heat and chemical resistance have outmoded old methods of stripping insulation from the wire.

Various means of insulation removal were tried—hand-scraping, wire brush, burning with a gas flame, and dipping in high temperature solder. But each of these methods had disadvantages, some very serious.

Objections to scraping No. 35 wire are obvious. The gas flame method frequently fused the fine (.005-0015 in.) wire, necessitating rewinding the instrument or armature. And dipping in hot (1,050-deg. F.) solder resulted in partial and sometimes complete melting of the wire. In cases where the wire was immersed in the solder for 11 sec. it disappeared completely.

Other more hazardous methods were tried, but they were abandoned because of danger to personnel. Concentrated sulphuric acid was discarded as being both a personal and operational danger. Caustic soda at 550 F. almost unavoidably burned personnel, the chemical action being too vigorous to avoid a certain amount of splashing.

At this stage, stripping and simultaneously tinning of the wire by using a hot solder dip was found to be the safest, fastest, and simplest method. The solder was kept at 1,000-1,100 deg. F., to strip the Formex or Formvar from the wire. Tinning was automatic and complete by the time the insulation had been removed.

Drawbacks were rapid oxidation of the solder, embrittlement of the wire, and charring of insulation above the stripped section, but more especially necking down of the stripped wire due to the combination of the copper with the solder at the necessarily high temperature. In addition, wires finer than No. 40 could not be dipped since their mechanical strength was insufficient to overcome the surface tension of the solder.

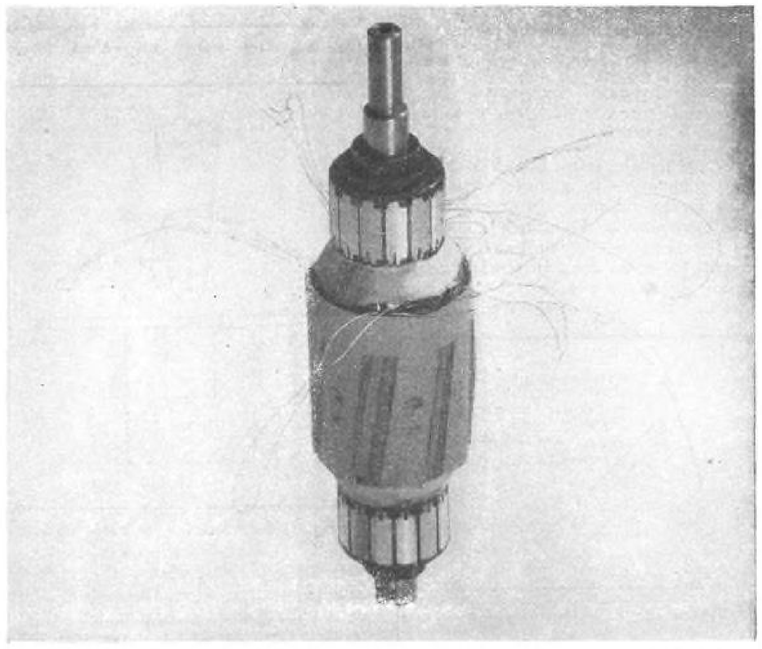


Fig. 1. Armature of 1⅛-in. dia. showing fine wires from which insulation was stripped. Tinned ends of wire, after trimming to length, are soldered into slots at inside ends of commutator segments. Damage to one of these would entail rewinding most of armature.

New Way Devised

In view of the above disadvantages, it was obvious that some new method was essential in order to overcome this bottleneck in the manufacture of electrical products using fine insulated wire. Thereupon, two members of Fairchild's engineering staff, Victor J. Canzani and Frank W. Stellwagen developed a new technique after much experimentation.

They specifically planned to avoid the effects of (a) embrittlement of the copper wire from the use of high temperatures; (b) charring and hardening of the insulation near the stripped section; and (c) dissolving of the copper in the hot solder used in the stripping-tinning operation. At the same time the process embodied (a) simplicity, by making the steps as few and free from complications as possible; (b) speed, by making the operations as few and short as compatible with satisfactory results; and (c) minimum handling, necessary because the small size of the wire rendered it susceptible to damage.



Frank Stellwagen (left) and Victor J. Canzani (right), inventors of Fairchild's patented wire-stripping method.

Experiments showed that a two-step method was preferable for stripping the insulation. Two chemicals were finally selected, presently known as "A" and "B", each of which has a separate function. Material "A" is the starter, softening and loosening the insulation. Material "B" then dissolves and loosens the impregnated insulation, which would not have been susceptible before its condition had been changed by "A". The wire is left in a perfectly clean condition and is tinned by dipping immediately after the remnants of the insulation have been removed by the fingers of the operator. All operations are illustrated in the accompanying photos.

Process Available

Temperature of "A" is kept at 425-450 deg. F. in an electricity heated pot. It is harmless to the operator; but since it gives off an unpleasant smoke, a vented hood is used over the container. The compound lasts for about four hours, after which it is thrown away and the pot cleaned thoroughly before refilling. It has been found that the method fails if the spent mixture is allowed to remain in the pot, which, however, does not have to be cooled to make the change.

Material "B" is a clear, colorless liquid, heated by a water bath to 120-140 deg. F. Higher temperatures speed the evaporation rate out of proportion to any increase in efficiency.

This process, originated by Fairchild for plant use, is patented; however, it is available for use by others who have similar problems.

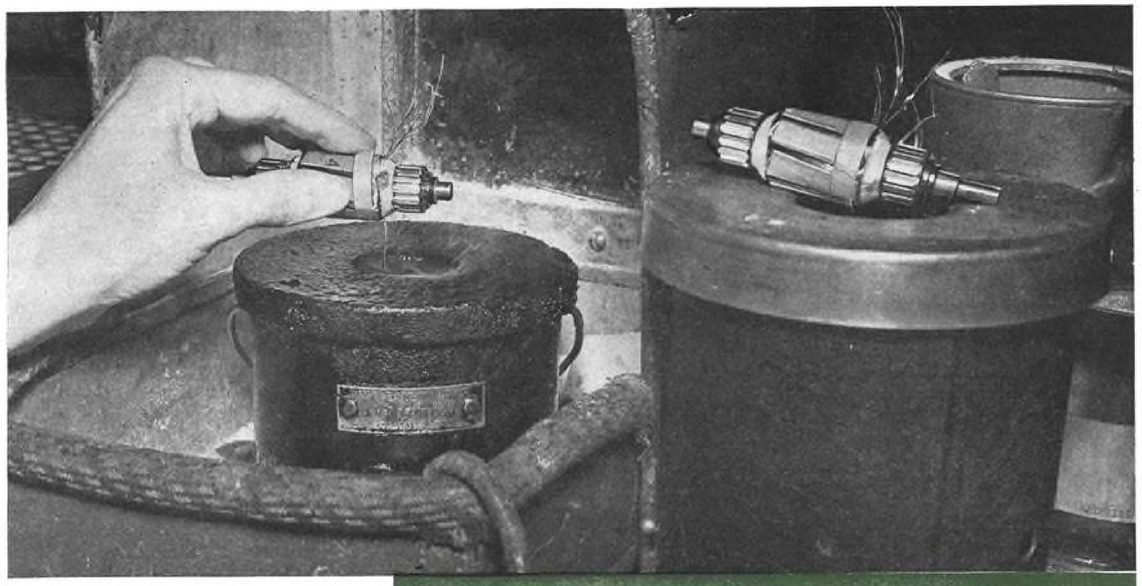
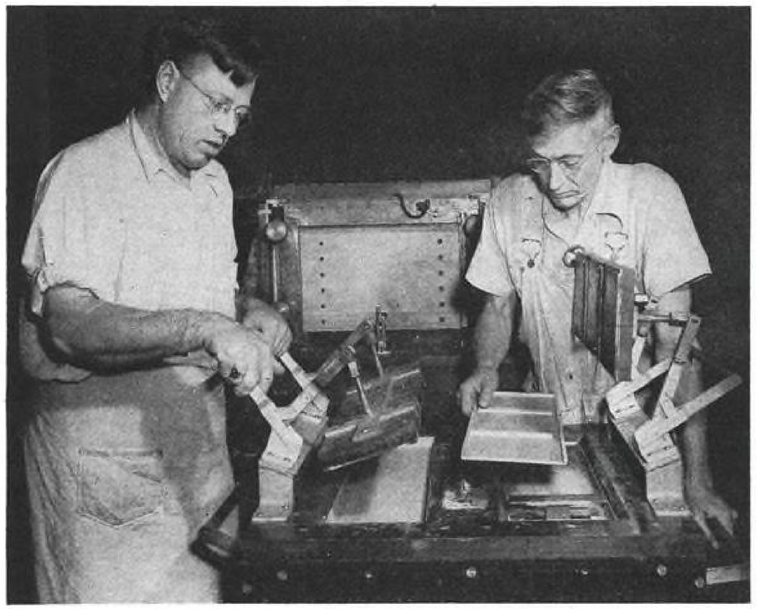


Fig. 2. Material is first dipped for 5 to 7 sec. in liquid "A" (left), then into liquid "B" (right) for about the same time.

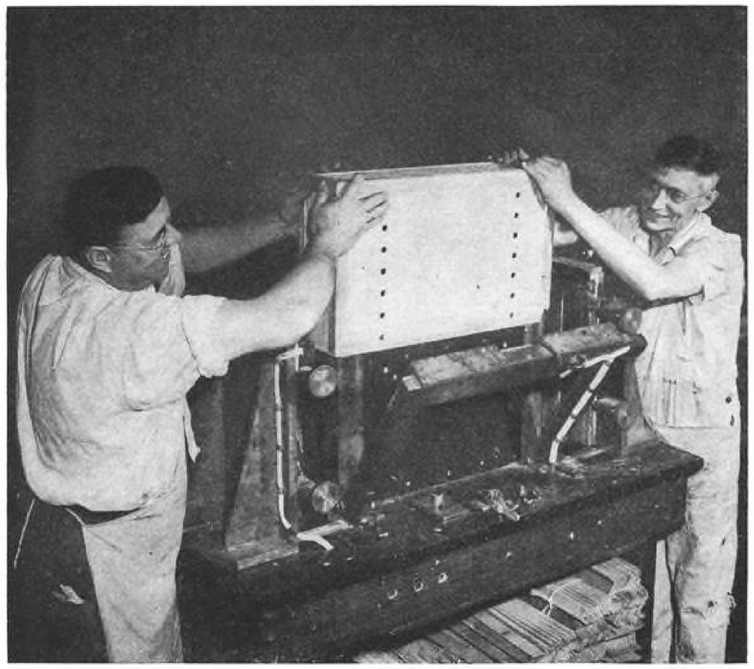


Fig. 3. After removal from liquid "B", remains of insulation are removed by light rubbing with finger and thumb, and next operation is short tinning dip into solder. Complete process takes about ½ min.

PLANT-PRACTICE HIGHLIGHTS



Sides are first handled singly in flat type electric heater.




Assembled parts are baked in automatic heater resembling pop-up toaster.

Toaster Principle Speeds Gluing

• By employing same direct heating methods as employed in an electric toaster, Glenn L. Martin Co. states it has cut time for gluing wooden ammunition boxes from 3 hr. down to 15 min. Sides are first set singly in an appliance like an electric grill, then are assembled into finished box in a special device which operates like automatic pop-up toaster.

Part-Holder for Welding


• Holding of small parts in position for welding has been simplified by this swivel clamp, developed in Curtiss-Wright St. Louis plant. Clamp is mounted on one end of shaft which has ball on other end. Ball permits easy movement of work in any direction. A pressure spring against ball prevents clamp from falling when screw is loosened.

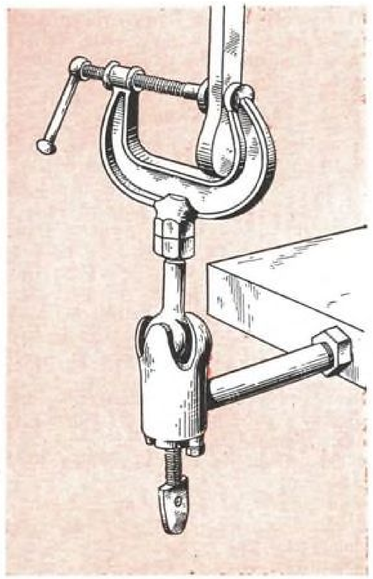

Wire-Twisting Tool

• This safety-wire twister, developed from employee suggestion at Jack & Heintz, results in faster work and more even tension on wire. Tool consists of jaws, enclosed within cylinder, which are closed by gripping lever under thumb. Wire is then twisted by crank extending from end of handle. (Jack & Heintz photo.)



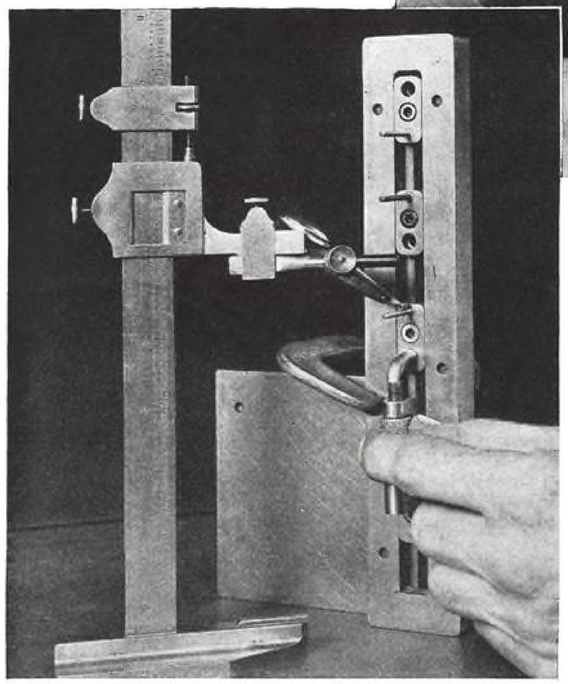


Certificate-Winning Drill Bar

• Here is adjustable drill bar which won Certificate of Individual Production Merit for Arthur Anderson of Northrop Aircraft's jig department. Note drill shanks extending, three in a row, from pilot guide holes in drill blocks. Bar is set up on milled block and dimensions established by height gage. Once dimension is held, bar will be unclamped and transferred to work. Micrometer adjustment takes last few thousands of an inch. Bar is capable of holding tolerances of .001. (Northrop Aircraft photo.)

Lubricated Lathe Center


• Using a pressure gun to force lubricant round point of a lathe center to reduce wear, General Electric has devised way to do more accurate work faster, since point does not heat, nor does dirt collect on surface of cone. Groove on face of center distributes lubricant at point of lowest pressure, from which it is drawn around cone by motion of revolving work.

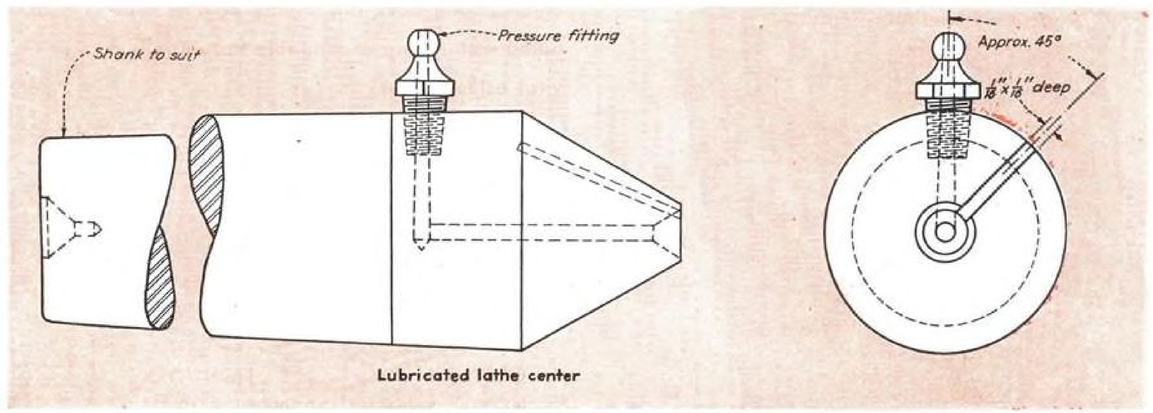

Lubricated lathe center



All five DZUS*-equipped

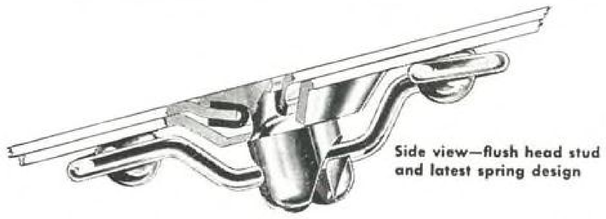

Side view—flush head stud and latest spring design

Year after year the Dzus spiral slot fastener, keeping pace with the ever more rigid needs of the aviation industry, built a reputation as the most dependable fastener. Thus, today the five top U. S. fighters are *all* Dzus-equipped!

Speed is built into every inch of those planes—and into the Dzus Fastener too. Only a quarter turn—*click*—this dependable fastener is open or closed. No protruding parts to interfere or offer resistance. Every inspection station is quickly accessible. On the ground or on carrier deck this saving of time combined with strong dependable fastening is a vital achievement.

*The word DZUS is the registered trade mark of the Dzus Fastener Co., Inc.

DZUS TRADE MARK REG. U.S. PAT. OFF. FASTENER CO., INC.

BABYLON NEW YORK

In Canada—Railway and Power Engineering Corp. Ltd.

A Plane Is as Fit As Its Finish

By JOHN BRENNAN and RALPH HALL
Paint Shop Foremen, American Export Airlines

Knowing that corrosion wins a quick victory when that finish isn't "right," AEA paint experts made a concentrated study of finish factors—and came up with a special technique which eliminates need for a priming coat.


IT'S A BIG undertaking to maintain the finishes on a fleet of 30-ton flying boats such as are operated by American Export Airlines. In no other field of transportation, including the operation of land planes, do the forces of nature combine to break down and destroy the toughest organic coatings the chemist can devise.

During landings and takeoffs, salt water sluices over parts of a flying boat. Spray is picked up by the propellers and tossed back over the aircraft. In taxiing, the wing floats are almost submerged. A certain amount of this water does not completely drain off, and so, in the process of evaporation, a salt deposit remains. The presence of water is trouble enough, but crystalization means double trouble. This salt does not lie dormant. It is busy eating its way through the paint and, if left unchecked, eventually through the anodic coating.

The organic-finishing department of an airline has the proper materials to work with, but the proper *application* of these materials depends so much on the *preparation of the surface* to hold these materials that we at American Export Airlines devote more time and study to the surface preparation than to any other phase of the completed operation.

Surface Preparation

In preparing a surface on one of our Sikorsky VS-44 Flying Aces to receive and hold tight the organic coating, we endeavor to create a surface approxi-

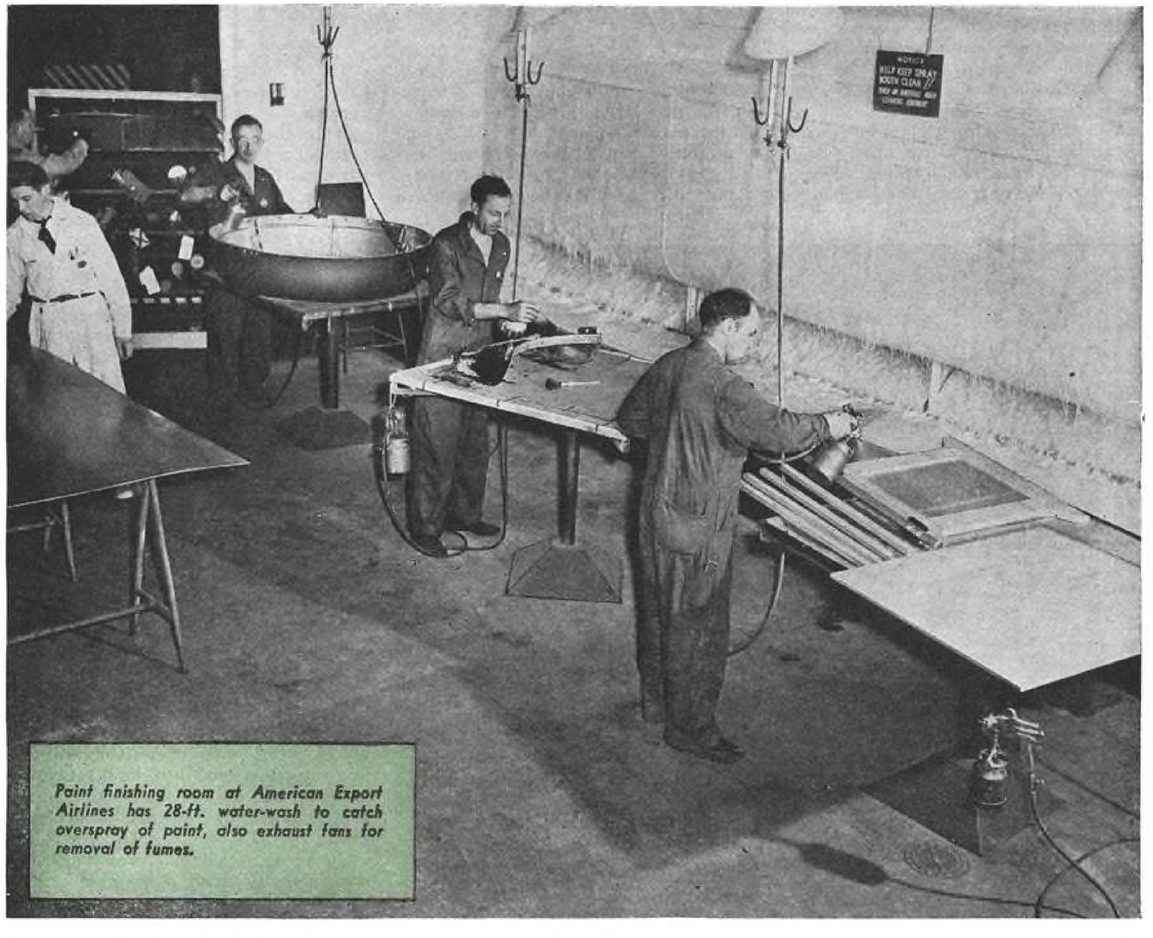

Paint finishing room at American Export Airlines has 28-ft. water-wash to catch overspray of paint, also exhaust fans for removal of fumes.

mating as closely as possible the state in which the aluminum skin left the anodizing tanks after processing.

The amount of coating on the surface of any aircraft should be no thicker than is necessary to protect completely the metal against corrosion. Additional material serves no good purpose and many a bad one.

We have considerably decreased the amount of paint on the surfaces of our planes, reduced the corrosion problem, and lengthened the life of many parts of the aircraft which previously have required frequent servicing.


Battling corrosion—and it *is* a battle—calls for a definite understanding of what causes corrosion. If water or moisture could be kept from contact with metal, corrosion could not take place. The electrolytic action that induces corrosion takes place as soon as water touches unprotected metal. Where salt is present, the action is greatly accelerated.

The finisher's problem is to insulate the metal from all contact with water. The most common process in the aircraft field is by anodizing. This consists simply of applying a coating of aluminum oxide, which is actually a corrosive action. However, unlike nature's method for performing a process such as this, the finisher has in his control the means for arresting this action at a pre-determined point.

Further organic coatings on the anodic surface provide additional insurance and also serve the purposes of camouflage in war and decoration in peace, but they have necessitated a more careful watch of the sensitive aluminum hull for corrosion damage. Also, while on the ground or at the dock, the bare anodized surface presents a "patch quilt" effect. This is due to the fact that control of color in the anodizing process is not perfect. The result is that large skin areas may have no two portions exactly alike. Sometimes a protective coating of lanolin and beeswax has been applied over the anodized skins. However, this coating material has to be removed at servicing and again applied.



First step: Worker at right sprays water from gun while other man washes surface with soap and stiff brush. A third man follows up with water rinse.

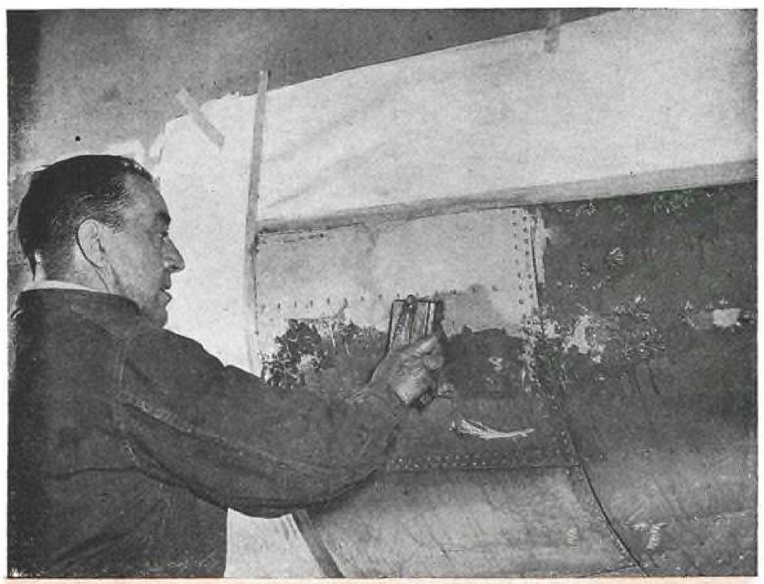

Second step is stripping for close check of condition of surface. Painter's hands are coated to protect them from cleaning solution.

It has been our experience that a paint coating can meet all requirements for protection and durability. But to accomplish this the greatest amount of consideration and time must be given to surface preparation.

Washing

First mechanical operation in servicing one of our planes on arrival at its home base is a thorough washing. Hosing isn't adequate. We use a good grade of pretested soap solution applied to the surface by means of a pole gun. Agitation with stiff-bristled brushes follows, then a rinse with clear water, again with a pole-gun.

This equipment enables a team of three cleaners to wash 60 percent of the aircraft surface without the use of ladders, and it eliminates the use of rags and the gathering of lint and threads around rivet heads, seams, etc.

Particular attention is given to all control-surface hinge fittings, fairing places, floats and float fittings, and also to that portion which is closest to the painter's heart—the hull bottom. All surface salt deposits are removed by this operation.

After the floor boards have been removed, refuse in the bilges is cleaned out by a vacuum system, then comes the cleaning procedure used on the exterior of the hull, followed by the usual clear water rinse.

All of these cleaning operations are necessary. Constant observation of the results of the condensation that takes

place in confined areas of all aircraft—such as the interior of hull, control surfaces, etc.—disclosed that *exterior corrosion* is *usually the result of an electrolytic action that begins on the interior.* Many man-hours expended in stripping paint from exterior surfaces have been saved as a result of our emphasis on cleanliness.

Extruding a compound fillet along all skin seams on the entire aircraft helped remarkably to lessen the amount of salt water settling on the interior of any part of our flying boats. For this purpose we have found a Neoprene compound very satisfactory.

Interior Surfaces First

If, after cleaning any localized interior surfaces, corrosion is evident, the area is stripped of paint, phosphotized with one of the standard preparations, touched up with zinc chromate primer, and followed with a coat of aluminum varnish (AN-TT-V-118).

The electrolytic action on interior surfaces, particularly the inside of the hulls, seems to intrude itself through flexing seams and rivets. Eventually, a firm grip is established and the exterior surface shows signs of deterioration. That is the reason we reverse the usual flying boat maintenance procedure and correct the interior first, the exterior last.


Our engineering department has discouraged the use of the standard aircraft fabric tape, which has been used so extensively around flight deck windows and also for sealing non-watertight fairings. This tape traps salt water and moisture, inducing corrosion, and presents a hazard in flight due to the flex of the surface and its tendency to become brittle and break loose. In place of tape, sealing compounds are carefully extruded into these locations. Incidentally, the man-hours consumed for servicing these areas has diminished considerably.

Here is the preparation procedure worked out at American Export Airlines: All external crystallized corrosion on hulls and hull bottoms is first removed with a stiff bristle brush and hot water. If the corrosion is in a more advanced state, then the paint is stripped and the corrosion removed with a solution of inhibited phosphoric acid. If, after this treatment, corrosion pits are still present, the inspection department should be consulted as to the airworthiness of the structure.


Stripping Paint

The paint remover used in our finishing department is similar to Navy specification C-113. It is a non-inflammable wax-free type which does not discolor or oxidize aluminum alloys. In stripping small areas, we apply this remover by brush. However, when large areas of the aircraft have to be stripped of all paint for a periodic check, the stripping material is sprayed on. We use a pressure tank because this permits the painter to apply the material at a very low pressure. A syphon-type spray gun is not recommended because most of the solvents in a

(*Turn to page* 263)

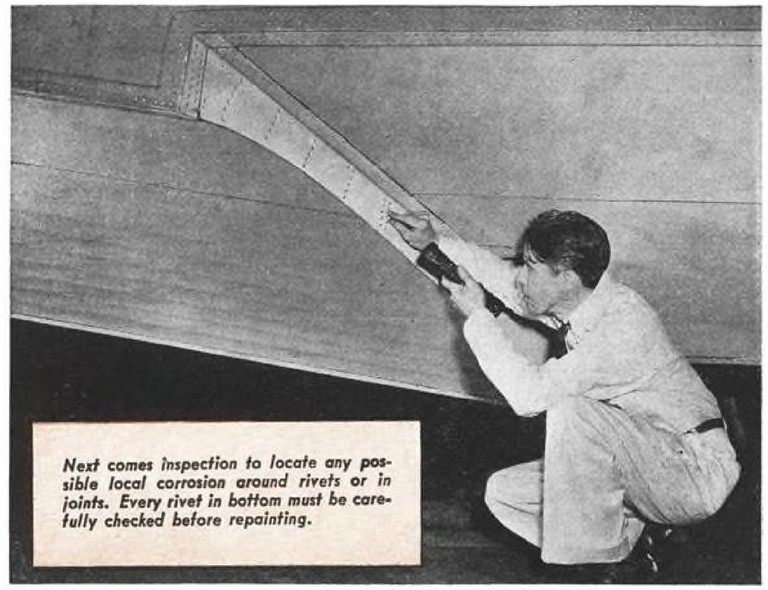

Next comes inspection to locate any possible local corrosion around rivets or in joints. Every rivet in bottom must be carefully checked before repainting.

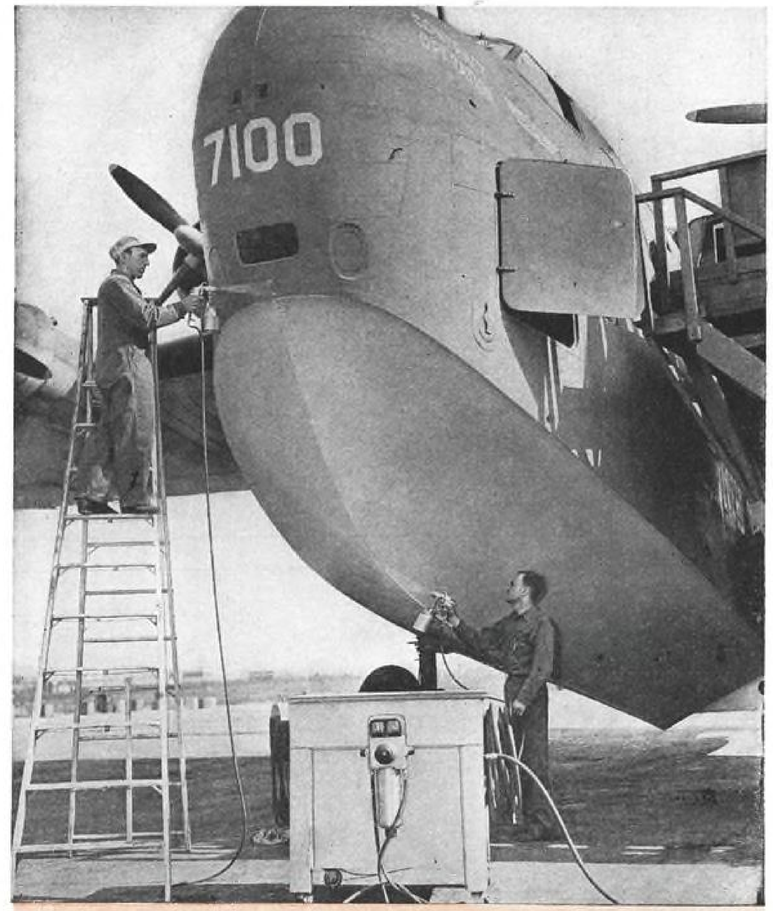

Final process is repainting with synthetic enamel. Note special portable wagon carrying electric-drive pressure unit and transformer.

ATSC Tools Save Time, Equipment

Millions of man-hours and a wealth of equipment are being saved in AAF maintenance and repair by gadgets developed by members of the ATSC—the men on the ground who keep the planes in the air.

EVERY COMBAT FLYER, when he lands after a mission, gives full credit for his safe return to the ground crews who maintain and overhaul his plane—for he knows that their skill and careful work keep him in the air until he wishes to land.

But few pilots, and virtually no one outside the ATSC, can realize how many times combat planes, which now fly regularly, would be grounded, if it were not for the ingenuity of the mechanics. They do not merely service the machines but also devise and make tools which save working time and equipment. Often, as a result, they thus augment the fighting strength of our air arm.

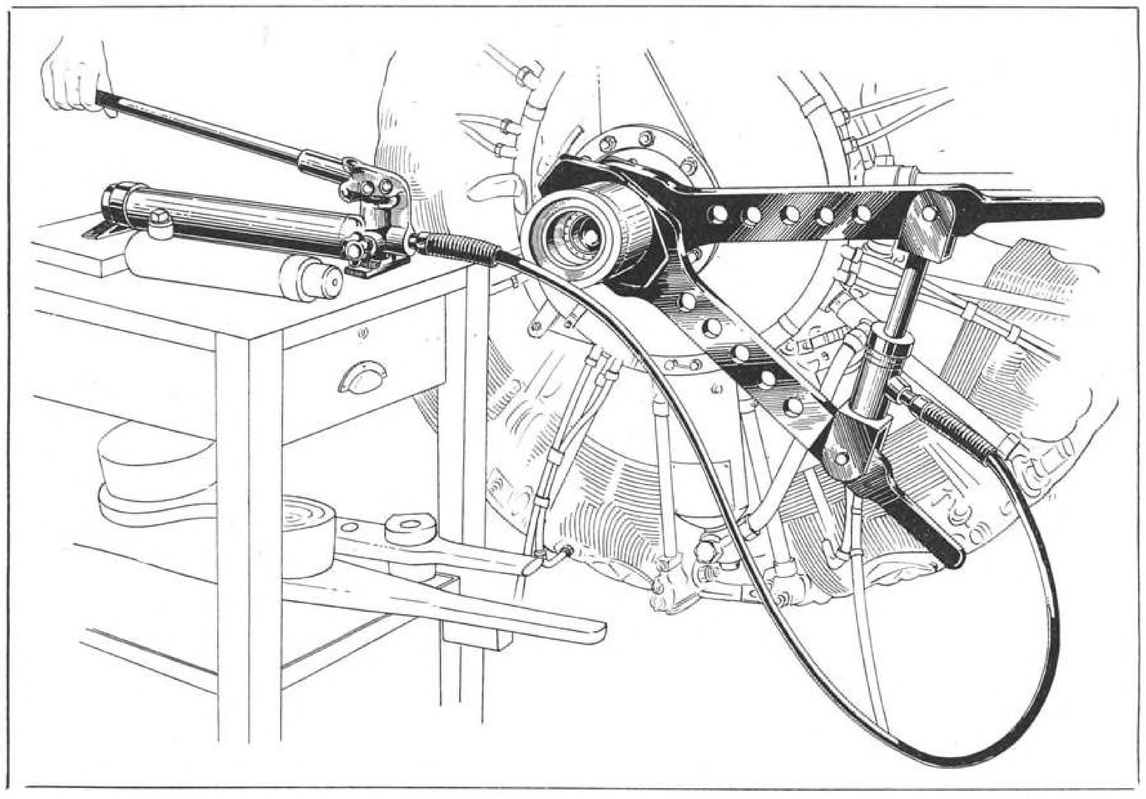


Fig. 1. By using hand pump at left, 7-ton jack between wrenches is expanded, forcing them apart and breaking loose propeller-shaft thrust nut.

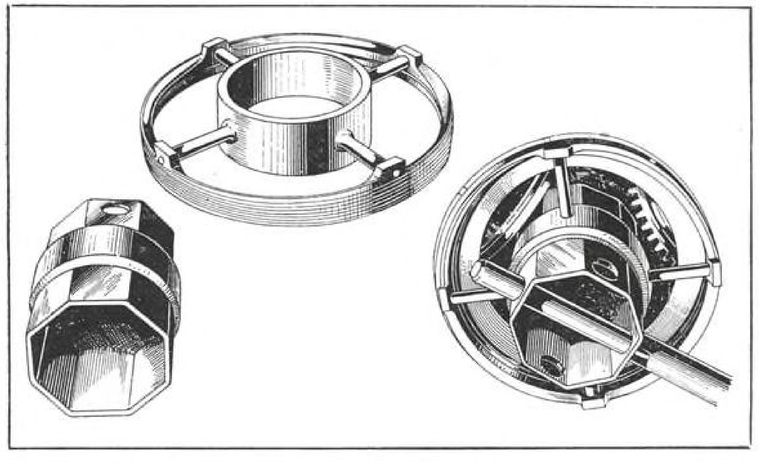


Fig. 2. Propeller-hub retaining-nut wrench (upper left) didn't slip after guide (right) was made from dome nut and applied as shown (bottom right).

By combining two wrenches with a modified 7-ton jack (Fig.1.), P. P. Baker and James Farrow, of Ogden ATSC, have simplified the job of removing propeller shaft thrust nuts so that sufficient pressure can be exerted by one hand where formerly sledge hammers were used—to the detriment of the wrenches and often with serious injuries to personnel.

At San Antonio ATSC, Karl Buechler, noticed that much time was wasted because the standard propeller-hub retaining-nut wrench frequently slipped off. To eliminate this trouble he made the guide shown in Fig. 2. using a Hydromatic dome nut and pieces of scrap. Result was a 25 percent saving in time and longer life for the wrench, which formerly was damaged by slipping. Picture shows the nut at top left, guide at right and the whole in use at bottom. A band was welded round the socket to fit the guide.

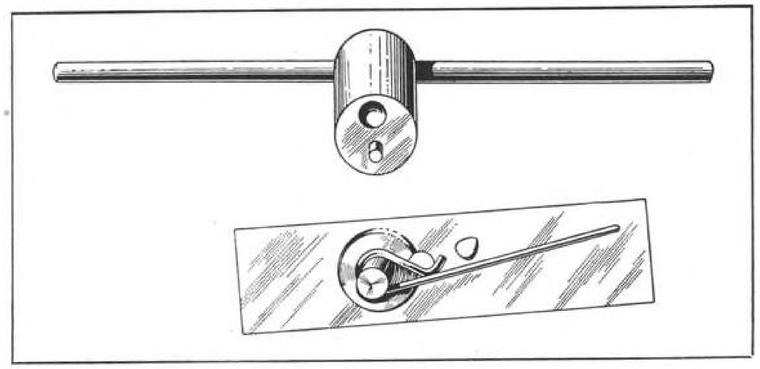


Fig. 3. This jig can bend cowling safety pins faster than they can be used. Operated by a turn of the wrist, jig forms an indispensable part of a shop's equipment.

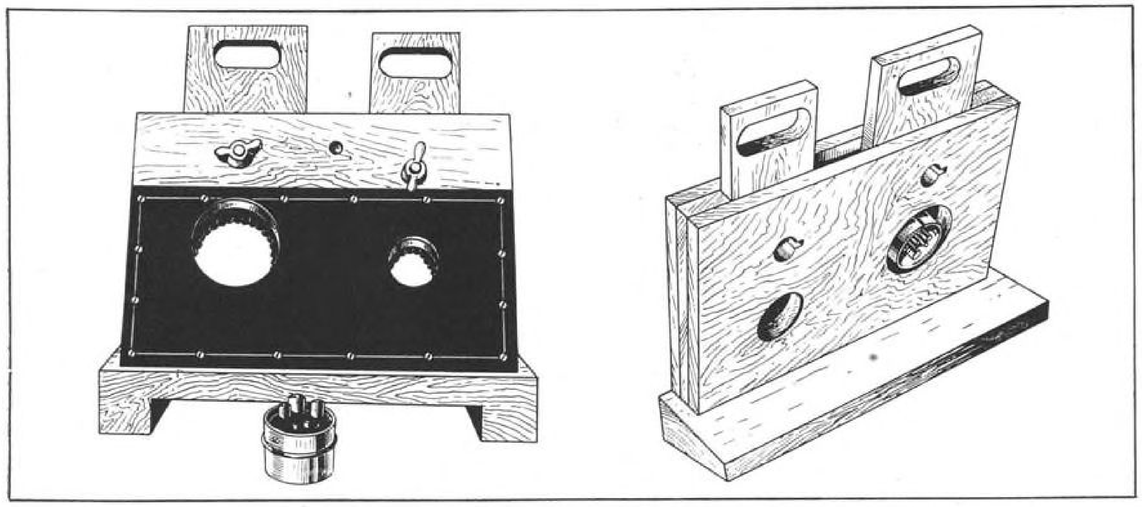


Fig. 4. Delicate Cannon plug (left foreground) was formerly held in vise when wiring—frequently with disastrous results. Clamp illustrated above holds large or small sizes and speeds work.

When a cowling safety pin is lost and none can be had without a requisition, a lot of time is saved when the jig shown in Fig. 3 is on hand. By placing a length of wire in this device and giving the handle a half turn, a new pin is made in less time than would be needed to write down the need. For rapid production of stock, this jig saves much time in a busy shop. Felix D. Flowers, of Sacramento ATSC, gets the credit for this device.

A junior electrician, E. B. Butler, also of Sacramenta ATSC, disliked the idea of placing delicate Cannon plugs in a vise when wiring them. Working with P. E. June, a carpenter, he made the holder shown in Fig. 4—and thereafter no more plugs were damaged. In addition, wiring time was cut in half and a better job was done.

Though heavy steel cable is not used on aircraft, there are unfortunately, wreck-

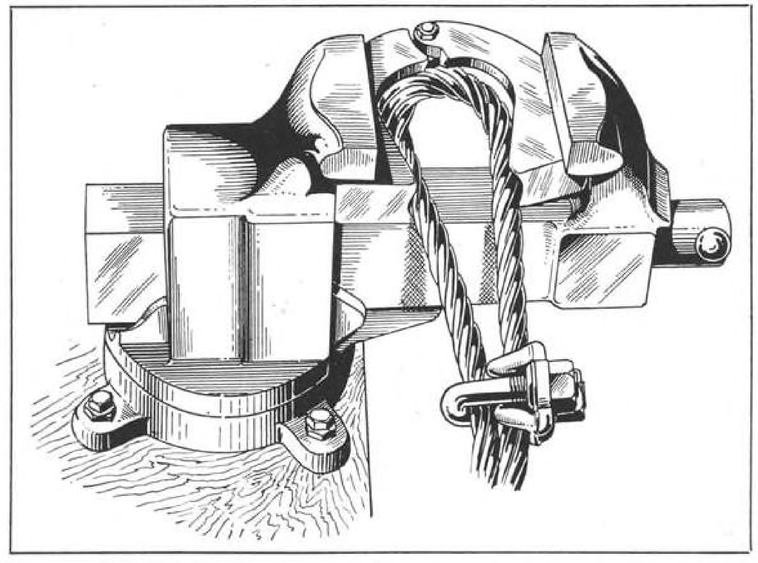


Fig. 5. Vise-operated cable clamp bends heavy cable and also holds it firmly while being clipped.

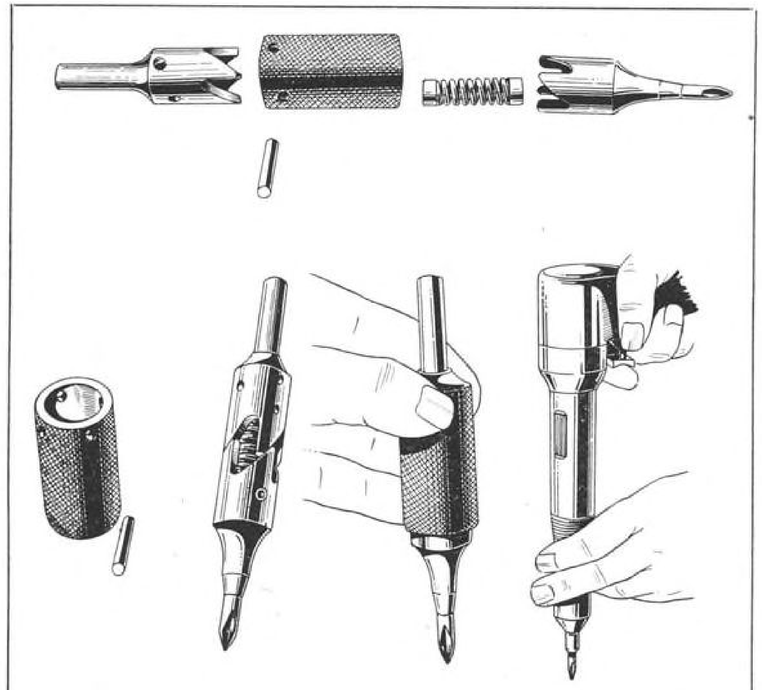


Fig. 6. Screw loosener is one of greatest time savers. Action of two helical parts working together jars and twists even the worst corroded screws without damaging them.

ing cranes to be maintained. Clipping the cables is a long, hard job, chiefly because of the stiffness of the material. N. Maloof, another Sacremento mechanic, built the clamp illustrated in Fig. 5, which both bent and held the loop until the clamps were attached.

A corroded screw is one of the small things which wastes a lot of time when it must be removed. Ordinary screwdrivers either split the head or slip and cut it to pieces. Next stage is to drill out the screw without spoiling the hole. If the hole threads are damaged, an oversize hole has to be drilled and threaded and a larger screw used. This is rated as poor work, but sometimes circumstances compel the use of this method—unless a screw removing tool like that in Fig. 6 is on hand.

This gadget is composed of two halves with helical surfaces, which are forced together by a small air gun. This action strikes the head a sharp blow, loosening it and turning it at the same time. Holding the tool with one hand prevents it turning backwards on the up stroke of the gun. When J. M. Hill, of San Antonio ATSC, came up with this idea, he probably saved more time than all the years he had worked. Remembering the thousands of screws requiring removal of each major aircraft overhaul, it is easy to see that this device alone can be responsible for many hours of combat flight which would otherwise be lost on the ground.

At San Bernadino ATSC they repair a lot of circular radiators—which are not of a convenient shape to handle. Blocking them to prevent rolling is a time consuming job, so H. E. Goodwin figured out the stand shown in Fig. 7, where the radiator rests on rollers, making it easy to turn and firm when being worked upon. Not only are the radiators put back in service sooner, but none are damaged by rolling about on the old fashioned bench.

These examples do not pretend to cover, even slightly, the various activities of the ground crews in the ATSC. With over a million men on the ground, this branch of the armed forces could claim, without much chance for contradiction, that it possesses enough inventive brainpower to supply several major industries, with plenty to spare. What is even more important at this time, they are keeping the largest airforce the world has ever seen in the air, where it belongs.


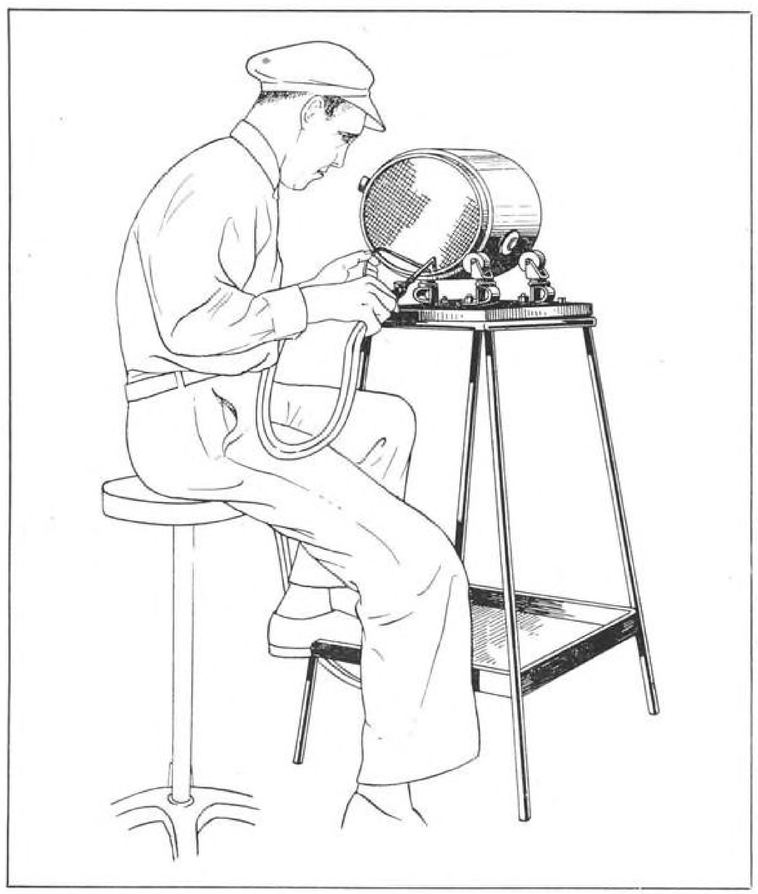


Fig. 7. Circular radiators can be conveniently repaired on this roller bench. Time is saved and damage risk eliminated, while valuable bench surface is made available for other work.

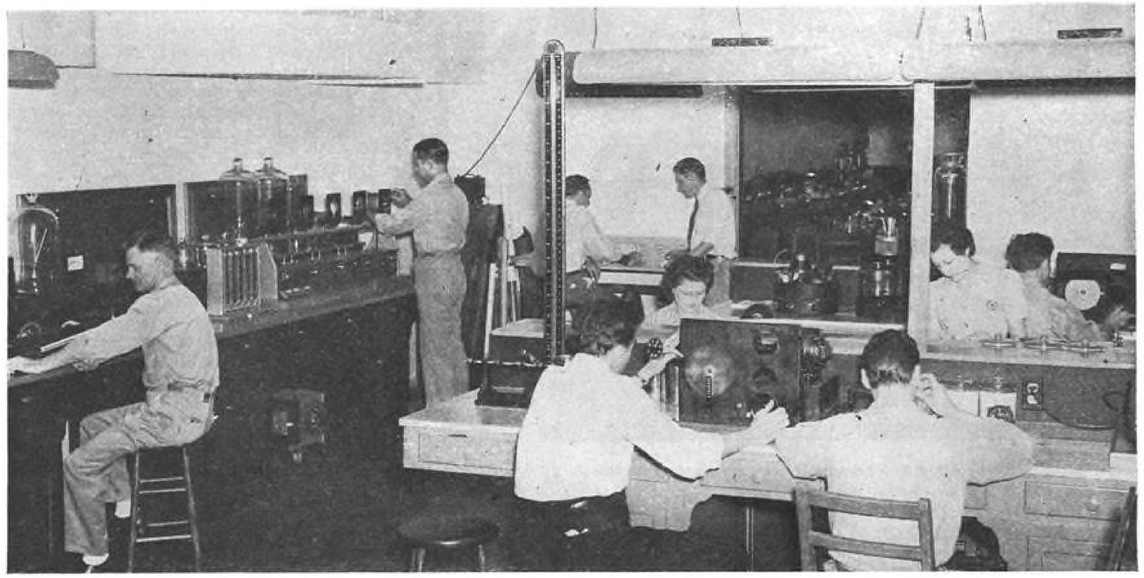

Part of Embry-Riddle Instrument overhaul department. Scoresby is seen in left background, while in foreground are tachometer test stand and water manometer.

SYSTEM Makes the Difference In Instrument Overhaul


By installing up-to-the-minute overhaul equipment and keying operations to a scientific production flow, Embry-Riddle adjusts instruments more accurately and returns them to duty in less time.

CONSTRUCTION of the instrument department at the Embry-Riddle Co. was begun in the latter part of 1942 in a concrete building providing a floor space of approximately 4,000 sq. ft.


To protect the delicate mechanisms the department was equipped with air conditioning and humidity control, eliminating dust and reducing problems caused by perspiration from the technicians hands. Dust in bearings will, of course, cause rapid wear and early failure of an instrument, and the various acids and salts exuded by sweat pores of the technicians will corrode metal parts. To guard further against dust, the floor was covered with asphalt tile, which is carefully kept waxed and polished.

Procurement of furniture and equipment being next to impossible, a special projects department was created to build the furniture, fixtures, and tools of the instrument overhaul department. Here, the first project was to construct cabinet-type work benches for 45 technicians per shift. Each bench, built of solid mahogany, featured a brown Formica top having white Formica disks inlaid directly in front of each position.

Each bench accommodates four workers, and all operations are done on the white disks, which make it easy to see small screws and parts. The benches are

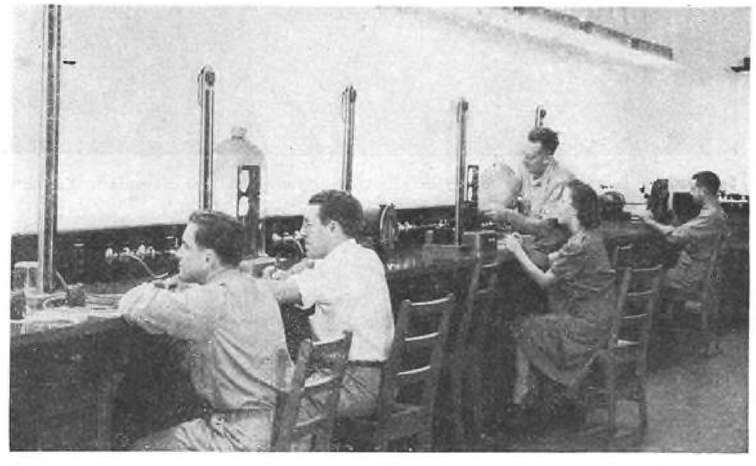

Five manometers being used for testing pressure instruments. In center is pressure chamber for altitude tests, while at far end is tachometer tester.

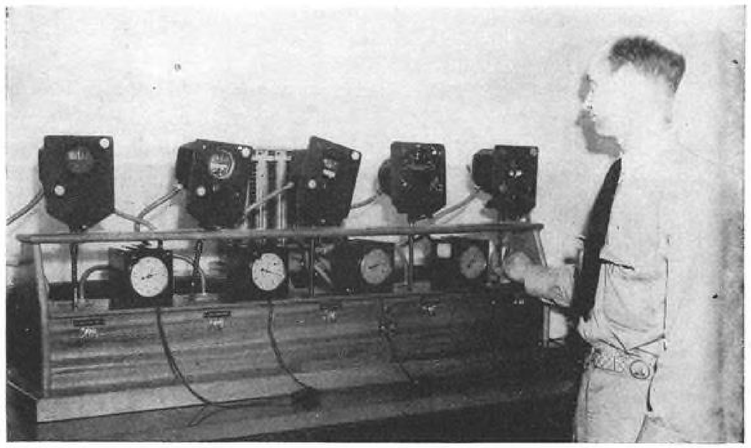

Five-place Scoresby fitted with separate clocks and mercury manometers. Any instrument may be stopped without disturbing others being tested.



Safe radium bench has glass top fitted with exhaust system to protect workers. Ventilated glass drying racks are shown at left of picture.

piped for air pressure, and each has dusting and drying guns conveniently located. Chairs were equipped with fiber swivel casters so that they could be easily moved with a minimum of noise.

At this point trouble started. A four-cylinder air compressor of ample capacity had been secured, but no suitable vacuum pump could be found. Special projects came to the rescue in a rather unorthodox manner. A large tank was constructed and hooked up to the intake or low pressure side of the compressor. The tank was fitted with adjustable intake valves within a filter, set to hold the pressure in the tank at 10 in. of mercury. Air enters this tank in a continuous flow, and it passes through the compressor into the pressure tank where a head of 40 psi. is maintained, so that both vacuum and pressure lines are supplied by the one compressor.

Test benches likewise were constructed of mahogany with brown Formica tops, and black Bakelite instrument panels are ranged along the back of each bench. Two of these benches, each 10 ft. long, contain all necessary equipment to calibrate and test practically all types of electrical instruments. Fortunately, all necessary Weston and Leeds & Northrop laboratory standard instruments for electrical measurements were on hand.

Next problem was equipment for refinishing dials and instrument cases. A ventilated work bench was designed having an exhaust manifold. All radium and luminous paint is applied under plate glass, the fumes being carried away through the exhaust. Special jigs and fixtures were constructed to hold the various items in the most convenient position. This equipment is housed in an air conditioned room, separate from the main overhaul laboratory. An air conditioned case-refinishing and dial-painting room, next to the radium room, contains a paint spray booth with turntable and an oven for baking dials and cases.

Formica-top mahogany test benches 10 ft. long were next built, each equipped with two sets of high and low vacuum outlets, two pressure outlets, and four 110v. a.c. outlets. All valves are chrome plated, and engraved plates are used for identification. All test benches may be vibrated so that tests may proceed under simulated operating conditions.

Three small and one large glass-front pressure chambers were next constructed. The small chambers have a capacity of 3 instruments, and the large one 18. All chambers, may be vibrated and pressures controlled at levels either above or below that of the atmosphere.

A single place Scoresby constructed to test bearings, roll, pitch, and yaw soon became a bottleneck. Special projects came to the rescue with a five-place Scoresby so constructed that one instrument may be removed or held stationary, to check drift and various headings, without affecting the others. There are five stop clocks and five mercury monometers register operating pressures.



Women work efficiently at instrument testing and assembly. Small parts are easily visible on white Formica working-disk which, by providing focal point, tends to reduce scattering of pieces.

A magnet charger was required that would charge all types of magnets used in instruments and generators. Magnets are charged to the maximum degree and after installation are drawn down to the desired point by use of a Variac in conjunction with demagnetizing coils.

Various discarded aircraft parts, a mixer motor, and other odd parts, were mounted on a mahogany base, and the result was an excellent shake table to test instruments under varying conditions of vibration.

For compass filling, a battery of five size C bell jars were mounted inverted in line on a mahogany base, each having a Bakelite disk cover equipped with a shutoff valve and connected by a rubber hose to a vacuum manifold. With this equipment, five compasses may be filled with compass liquid simultaneously, and any one may be removed or replaced without disturbing the others.

Variable speed tachometer run-in stands each having a capacity of eight




Final assembly is performed on well-lighted benches installed at efficient eye-level working height. White disks again aid in concentrating work.

instruments were constructed, as were several tachometer test stands with built-in stroboscopes. The latter will handle both electrical and mechanical tachometers.


When a low-temperature instrument check was needed an insulated dry ice refrigerated cabinet with window was constructed to enclose one of the pressure chambers in which temperatures as low as minus 60 deg. F. are obtained.

Other items furnished by the special projects department include units for hand rotor balancing and open case calibrating fixtures for gyro instruments, miscellaneous special wrenches, tools, 90-deg. geared screw drivers, improved bearing pullers, special taps, special lathe chucks, gyro rotor chucks, mercury and water manometers, vacuum boxes, inclinometers, etc. An Orsat was purchased for analyzing

(*Turn to page* 295)

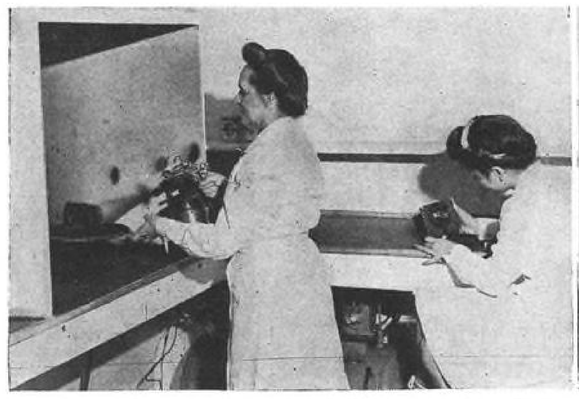


Final step in overhaul is spraying of finished instruments. Spray booth at left is fitted with turntable, and exhaust fan carries off fumes.

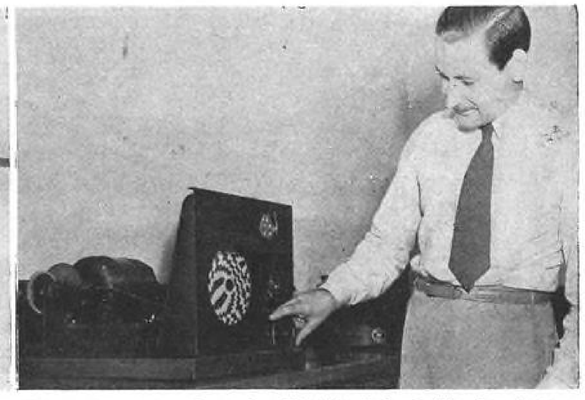

This stroboscope was designed and built by Embry-Riddle when shortage of standard instruments prevented obtaining of such units from manufacturer.

Bench equipped with laboratory standards for calibration, which are employed instead of master instruments. This method is stated to give closer accuracy.

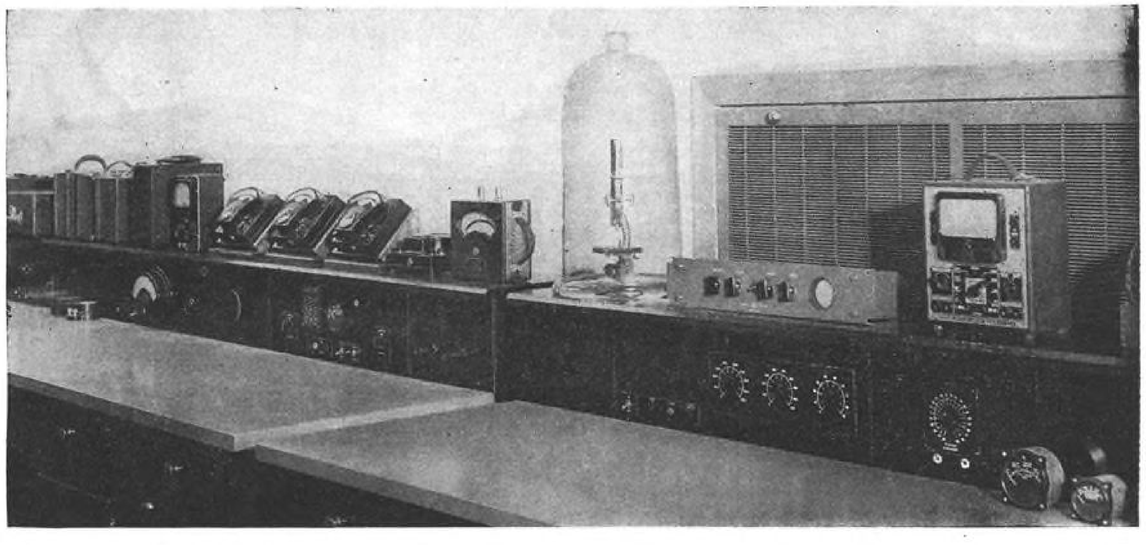

CUSTOMER SERVICE DIVISION


LOCKHEED AIRCRAFT CORPORATION

MODEL _____ LICENSE _____ OWNER _____

SERIAL _____ LOG BOOK TIME _____ ADDRESS _____

LOCATION _____ WORK ORDER NO. _____ DATE _____

SERIAL NO. UNIT _____

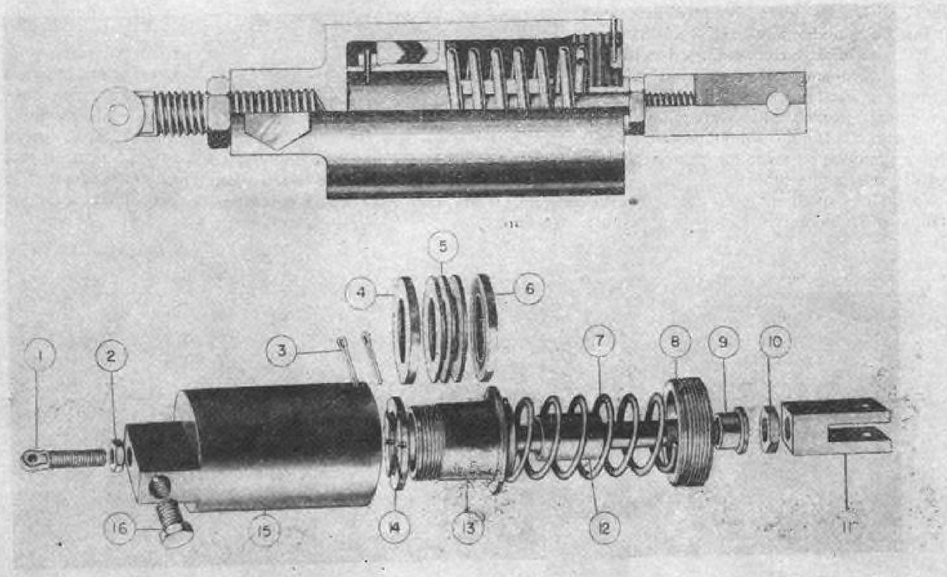

Landing Gear Up Lock — Vega Assembly No. 19054

Disassembly: Dept. No. ( )

Special Tools Required:

1. Retaining Ring Tool No. S-31200.

Disassembly: Time — 15 Minutes

1. Loosen jam nut No. 10.
2. Remove fork No. 11 and jam nut No. 10 from piston rod.
3. Remove cotter key No. 3 and remove retainer No. 8.
4. Remove piston assembly No. 13, spring No. 7, and stop No. 12.
5. Remove cotter pin from nut No. 14 and unscrew nut from piston.
6. Remove adapter No. 4 and packing No. 5, also adapter No. 6 from piston.

Disassembled by:

INSPECTION AND OVERHAUL — DEPT. NO. ( )

Item	*Part*	*Part No.*	*Inspection and Overhaul Req.*	*Instructions*
1	Bolt	11735		
2	Nut	AN316-7R		
3	Cotter	AN380-2-2		
4	Adapter	11744	Scratches, wear, etc.	
5	Garlock Packing	AN6225-20	Wear and fraying	
6	Adapter	11745	Scratches, wear, etc.	
7	Spring	11743	Alignment and condition	
8	Retainer	11736		
9	Bushing	11739	Scratches and wear	
10	Nut	AN316-5R		
11	Fork	11738		
12	Stop	11740		
13	Piston	11741		
14	Nut	11737		
15	Cylinder	11742	Scratches, wear and damage	
				Time — 10 Minutes
			Overhauled by:	Inspector:

Assembly: Dept. No. ( )

Reassembly: Time — 15 Minutes

1. Reverse of disassembly:
2. Assemble this unit wet with hydraulic fluid. Make sure the piston retainer nut No. 8 is drawn up flush with cylinder No. 15 and properly safetied with cotter No. 3.

Assembled by:

Functional Test: Dept. No. ( )

Test: Time — 5 Minutes

1. Connect the up lock cylinder to hydraulic test equipment and pump pressure to 1000 P.S.I. Check for leaks.

Inspector:

Lockheed's New Service Forms


Service division of Lockheed Aircraft Corp. uses forms of this type for recording overhaul and maintenance work. Shown on opposite page is form comprising job diagram, tool list, and disassembly instructions, while herewith is inspection and overhaul report giving parts list, reassembly instructions, and test data.



Snow Doesn't Ground RCAF

Problem of reaching flying speed in a foot of snow made effective snow treatment essential for RCAF. (RCAF photos)

Each year in Canada, General Snow threatens to flank Dominion aviation with his usual white barrage. But Royal Canadian Air Force tactics regularly rout the General. Here's how—

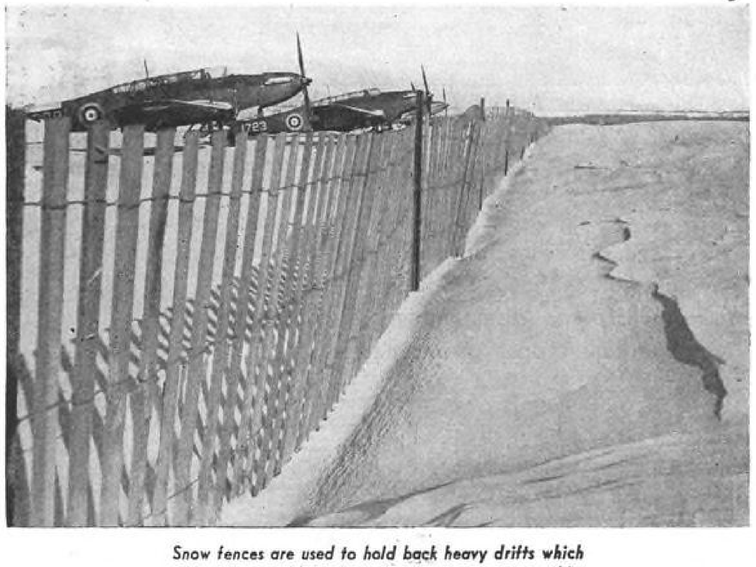

Snow fences are used to hold back heavy drifts which otherwise would make takeoffs almost impossible.

TO KEEP ITS AIRCRAFT in operation throughout the winter, the RCAF has developed standard instructions to meet the snow problem at all fields, in this way being able to maintain the vast training problem of the British Commonwealth Air Training Plan. Little time is lost through snowfalls, with aircraft using cleared or compacted runways a few hours after a storm.

Methods are dependent on whether the airfield is in the heavy showbelt or in more southern sections where snow does not lie throughout the winter. In heavy snowfall areas, compacting does the trick, each fall of snow being rolled into the previous layer, 1 ft. of snow being packed down to 3 in. In light precipitation areas, snow is removed entirely from the runways. In both cases, wheeled aircraft can now be used the year 'round.

Where complete or partial snow removal is carried out, one-way snow plows are used as soon as 1 to 2 in. of snow has fallen. The starting swath is down the center of the runways, then there is continuous working of the snow to each side. An early start often eliminates the use of a snowblower. To save burying marker lights, one or two trips are made on the outer edge of the runway, forcing the snow towards the center.

When blowers are used, the RCAF recommends that snow be blown at least 100 ft. from the runway and that rollers be used to consolidate it enough to support an airplane. Snow banking up along the edge of the runway must be cut down to remove a hazard to wing tips.

Basic idea in compacting snow by rolling and dragging is to build a paving of snow which may eventually become ice on which planes can land and take off readily. It is recommended only when average temperatures are low enough to insure that occasional thaws will not cause disintegration. This method has increased flying by as much as 400 percent at some fields.


The initial packing is by far the most important step in obtaining a satisfactory runway, since this forms a foundation for future surfaces by cementing the snow firmly to the ground. It should be started as soon as 2 or 3 in. of snow has fallen and continued until the storm has stopped. The field should only be rolled once after each snowfall. Further rolling has a tendency to pulverize not only the new snow but the former surface as well.

Heavy snowfalls usually have to be rolled and dragged after the first rolling has frozen. Uneven surfaces can be levelled off by using a drag ahead of the rollers to shave off high spots and fill low ones. A drag also helps to press air out of light fluffy snow.


When a rise in temperature softens the surface, the airfield must also be rolled to compact the snow, starting late in the day when the temperature is falling. A properly compacted surface usually does not honeycomb like ice on a lake, during the spring thaw, if rolling is continued. In the spring break-up, as much as possible of the compacted snow should be removed. When the surface goes completely rotten, all snow may be removed with snow blowing equipment. Slush should be blown far from runways because a sudden freeze would make a mass of ice which would be very hazardous prior to another thaw.

Corrugated gang rollers are used by the RCAF in sets of three. They are

(*Turn to page 293*)

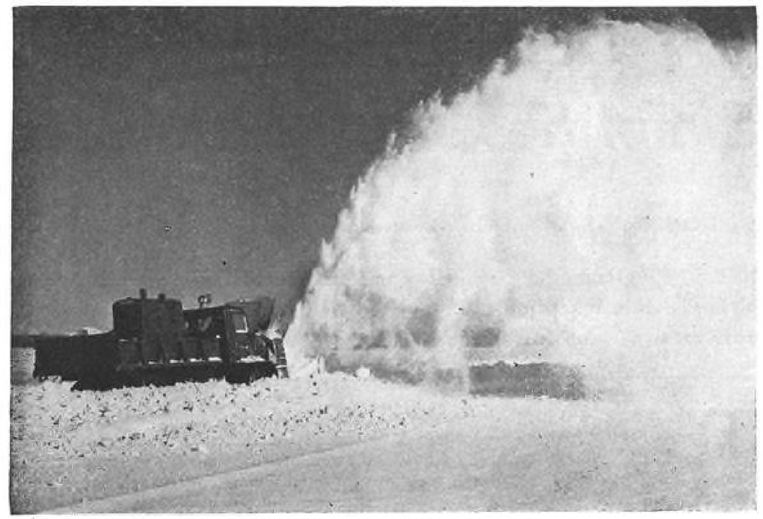

Rotary snowplow chops up snow and blows it clear of runways.

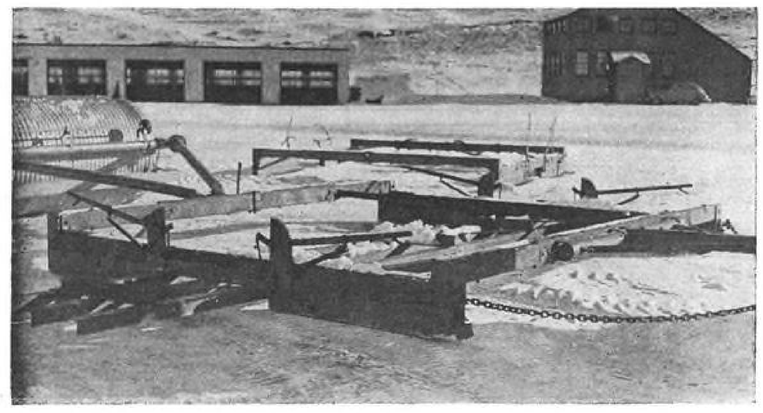

Drag followed by roller. This equipment is used when snowfall is not too heavy to impede its ready operation.

Where snow is too deep for removal, it is rolled down into a hard, compact surface. Runways are marked by evergreens.



Quick-Disconnect Simplifies Battery Changes

By DON DAVIS, *Cannon Electric Development Co.*


Heartily welcomed by maintenance crews stationed at sub-Arctic airfields, this invention enables two field men to replace aircraft batteries in much faster time—and without removing their gloves.

THIS DEVICE which eliminates certain field problems encountered with the current type of battery fitting, is being rapidly installed in new aircraft.


The former method of disconnecting aircraft batteries consisted of placing the cables on two stud terminals in a box on the side of the battery. Wing nuts were used to hold the cable on the studs. To disconnect the batteries, it was necessary to take apart two long screws to remove the cover, exposing the stud terminal.

In sub-Arctic regions, experience has proved that it is extremely difficult for the maintenance man to remove these wing nuts while wearing heavy gloves necessary in such climate. Moreover, sub-freezing temperatures require more frequent battery changes. This process was slow and cumbersome, particularly under combat conditions.

After the protecting box was removed for disconnection of the cables, the terminals left unprotected presented the danger of shorting the battery if any metal object touched the terminals. In numerous instances, such contact caused the current to burn holes in the aluminum structure during the removal of the battery.

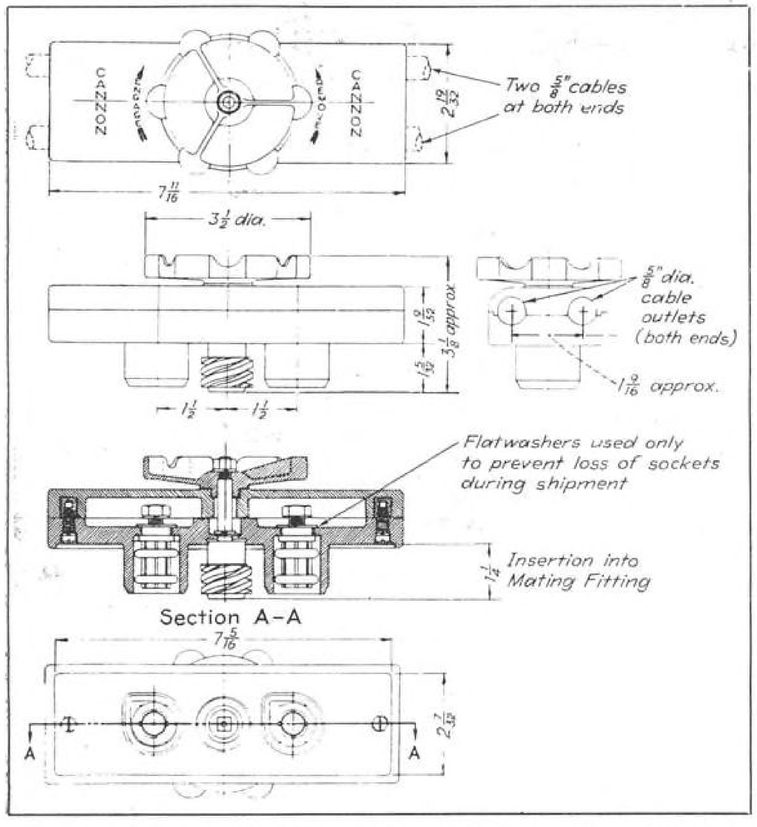

Drawing shows construction of battery plug. Large handwheel operates quick-thread extraction screw, and it can be turned by mechanic wearing even heaviest mittens.

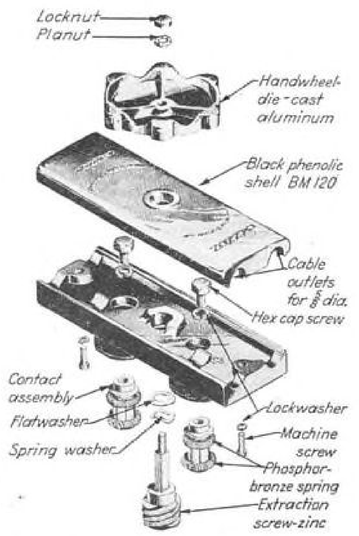

Exploded view of parts of Cannon battery plug.

Based on the screw-jack principle found in many connectors, the new fitting described here speeds removal and banishes shorting and fire hazards.


The wheel that turns the gear which engages and disengages the plug (with contacts) is large and notched to be operated easily by a gloved hand. The pin contacts in the receptacle are so enclosed by the shell that they cannot short in touching metal objects.

The receptacle is affixed to the battery case permanently. Its material is aluminum alloy, finished with black acid-proof lacquer. The two pin contacts are leaded copper with 12-24v. rating, 600 amp. continuous duty. The receptacle weighs approximately .513 lb.

Plug shell material is molded phenolic, as is the 3½ in. dia. hand wheel. Early models had wheels made of aluminum alloy finished with acid-proof lacquer. The cap screw is die-cast zinc, and the plug weighs approximately 1.462 lb.


Cable outlets are on both ends of the shell, giving alternate arrangement of cables, if desired.

The complete connector will fit any G-1 standard battery conforming to AN-W-B-141 specifications.

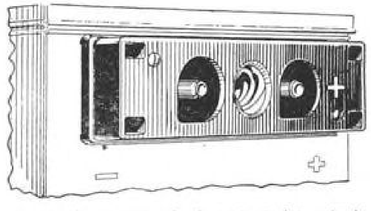

Battery kit contains both protected terminals. This fitting remains on battery during entire service.


Exhaust Manifold Nut Wrench

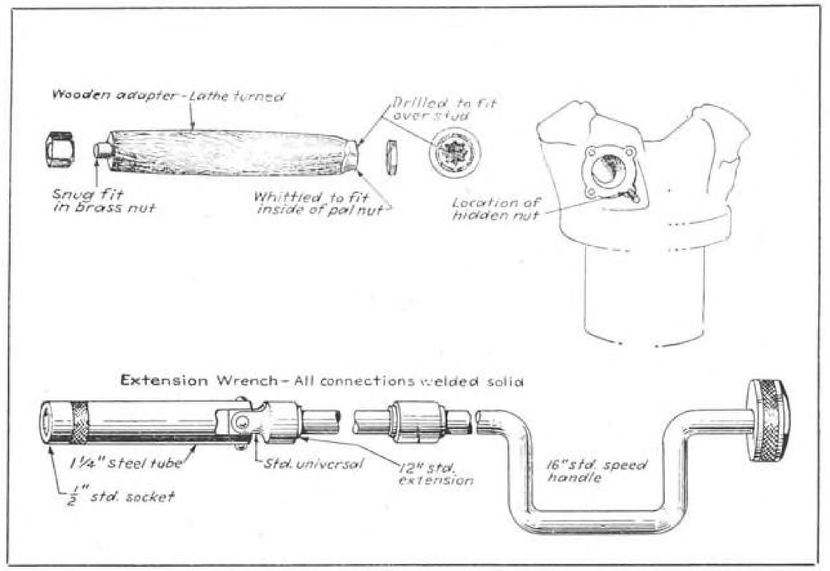

• To start the inside corner nut on exhaust manifold flanges by hand is almost impossible, but by using this wooden adapter it becomes simple. One end fits the brass nut while the other is whittled down to fit inside the Palnut, the center being drilled out to fit over the stud. Jointed wrench (lower portion of illustration) is used to finish the job.


Cessna's Tire Mounting Tool

• With this tool, one man can mount a tire and tube in about a minute. Routine: (1) Remove handle from base spindle, (2) place wheel over spindle with anchor pin between spokes, (3) lay tire on wheel and replace handle, (4) hold lower bead over rim on one side with tire iron and roll bead over rim, (5) install tube in casing and roll over rim of wheel, placing valve stem through hole, and (6) roll top bead over rim. Tool can be used either on floor or low table. (Sketch re-drawn from an ASC bulletin.)

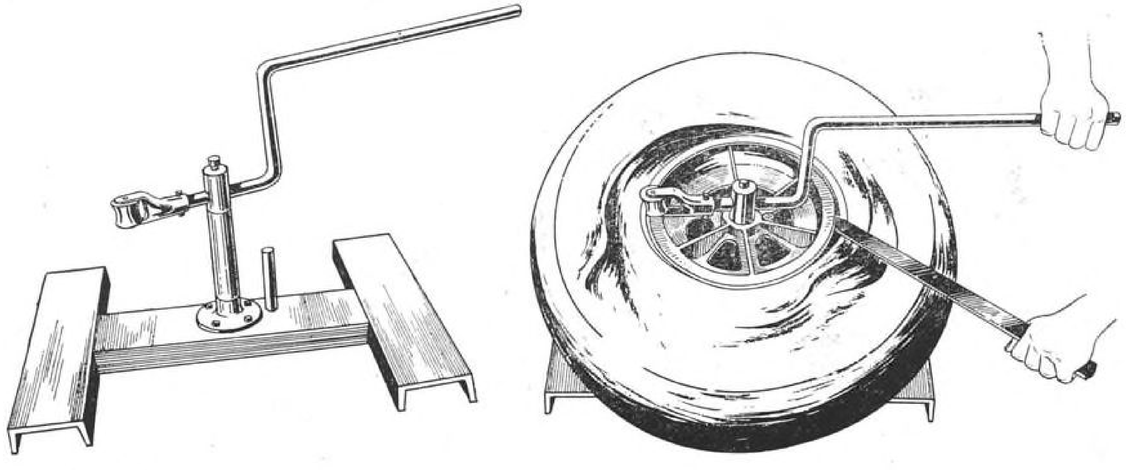


UAL's Airspeed-Indicator Tester


• Using a spring-actuated cylinder to develop air pressure corresponding to airspeeds marked in two manometers (see photo), United's Cheyenne base tests airspeed indicators up to 250 mph. (on right hand tube) and to 450 mph. (left hand tube). W. M. Bartosch is seen "hangar flying" an instrument at about 180 mph. (United Air Lines photo)

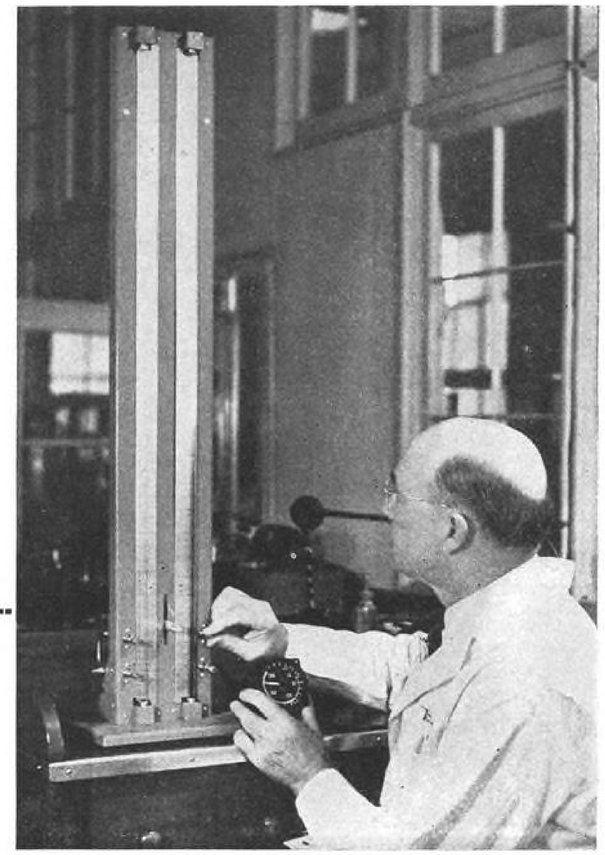

Eastern's Tach-Test Setup

• By means of a variable-speed drive (shown here at center of wood base) and a strobotac (left), Eastern Air Lines calibrates its electric tachometers throughout the full speed range of the instruments.

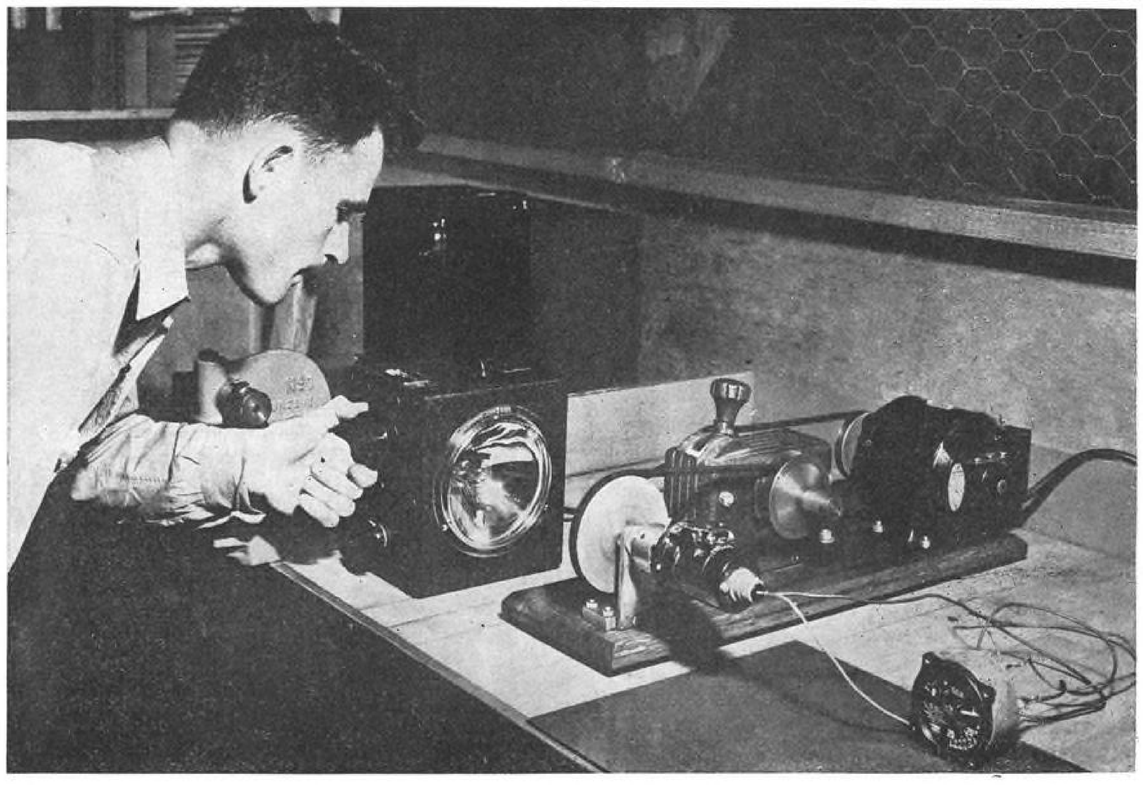

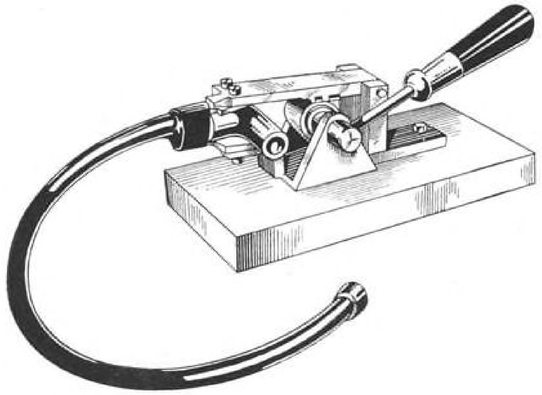

Rubber Tube Expander

• Danger of splitting tubing when inserting fittings is eliminated at Curtiss-Wright's Buffalo plant by use of this two-jaw expander. Jaws are inserted into rubber tube, then handle is pressed, separating jaws. Fitting is slipped between jaws into tubing.




Northrop's Sheet Metal Clamp

• Devised by Clifford L. Nelson of Northrop, this simple but effective lifting clamp for moving sheet metal in the paint shop is constructed on the well known ice-tongs principle. It grips even the smoothest plates without scarring the surfaces.

Aileron and Flap Storage Rack

• Army's 89th sub-depot at Randolph Field built this rack to avoid risky handling of flaps and ailerons, with resulting chance of damage. Rack is so designed that padding is not required. Additional advantage over horizontal type is that it saves floor space.

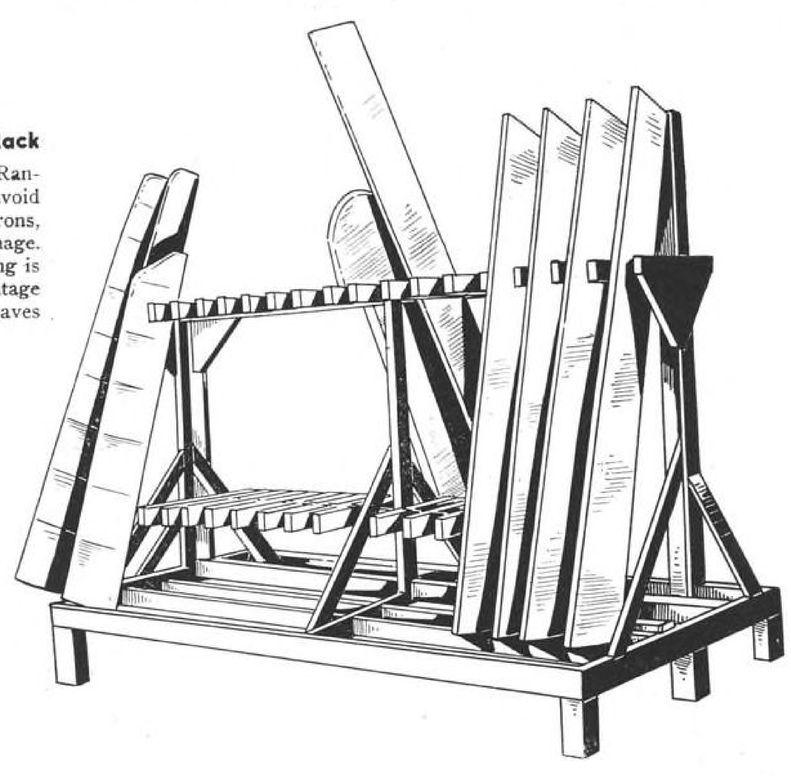

AIRMAIL GOES RFD

By **EDWARD E. THORP,** *Assistant Editor, "Aviation"*

Here are the working details of the aero pickup system pioneered so successfully by All American Aviation—a practical development pointing the way to fast, reliable airmail and air express service for countless communities where conventional airports would either be uneconomical or impossible to install.

DESPITE THE FACT that proposed airpark and airport programs will bring the airplane's increasing utility to countless additional populated areas, there are still hundreds of communities in the United States where it is physically impossible to establish an airport.

These towns and cities can, however, be given adequate airmail and air express service through further development of a pickup service such as pioneered by All American Aviation.

Long since proved practical by this organization, with the system further tested by military operations, the aero pickup service seems destined for an even greater role in postwar transportation, both scheduled and non-scheduled.

After but one year's operation under leadership of the late Richard duPont, the Postmaster General reported that "the operation has been carried on during one of the worst winters in recent years. Notwithstanding that fact, a very high percentage of performance has been maintained, even during the worst of the winter months. Regular schedules have been maintained throughout the length of the two routes. In one instance in which the regular transport planes could not operate into Pittsburgh airport because of the snow, the pickup service was the only one operating. Recently, pickup service was maintained in the flooded Ohio River Valley when there was no other transportation and when it was necessary to use rowboats to place mail on the pickup poles.

"It is an established fact that, for an air route to be of greatest benefit to the public, planes must operate after the close of the business day to collect all business and late residential mail. In the month of Dec., 1939, All American Aviation installed a number of neon lights which proved the feasibility of night operations and demonstrated that the close proximity of pickup stations would permit continuous night service without the great additional cost of lighted airways.

"From a safety standpoint, it is interesting to note that though this operation has been over mountainous territory with single-engine planes, the two routes have been in continuous service for the past year without a single casualty. Pilots and operators," concluded the Postmaster General, "are unanimous in their opinion that the safety of this method is such that passenger service could be included, if multi-engined planes were used."

From this beginning, AAA's pickup service has grown until it embraces 112 towns in Pennsylvania, West Virginia, Kentucky, Ohio, Delaware, and New York. Proposals have been filed with CAB to extend the routes to cover 237 communities. So striking has the success of the system been that there are, at present, nine independent pickup airline companies projected, to cover 26 states and provide airmail service to 1,375 communities now dependent on surface delivery. Over 25,000 mi. will thus be added to present airline mileage, no small contribution to the total, especially when it is remembered that this work is done by single-engine planes.

Although it might be argued that any small plane can be fitted with a hook and be ready to go into the business, special equipment is required for successful operation.

First of all, a chute must be built into the bottom of the fuselage so that the container may be safely hauled into the plane. Then—as all fishermen who have bucked strong winds know—a hook on the end of a line needs some guiding, so a pole has to be fitted to carry the pickup hook and release it at the right time.



The late Richard C. duPont, organizer and first president of All American Aviation. He installed first successful commercial air express and mail pickup system.

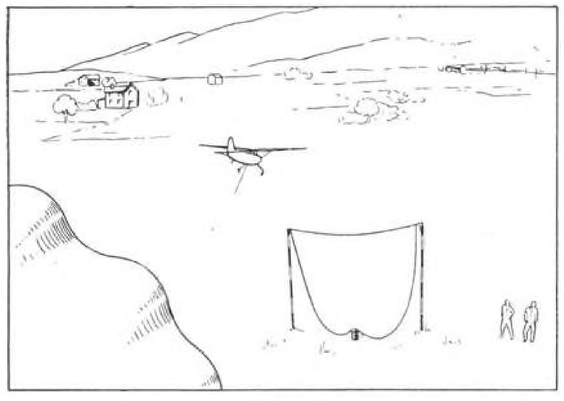


Fig. 1. Plane approaches pickup station.

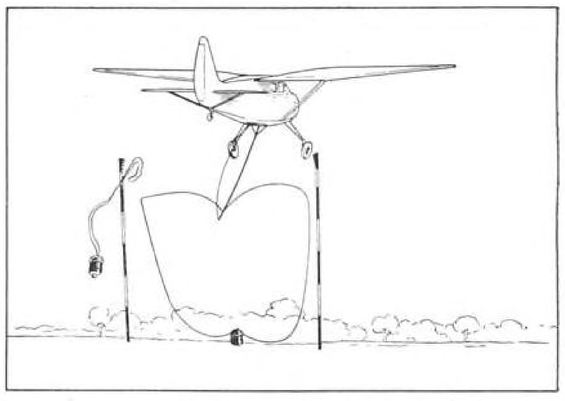


Fig. 2. Delivery container is released by pilot instant before pickup.

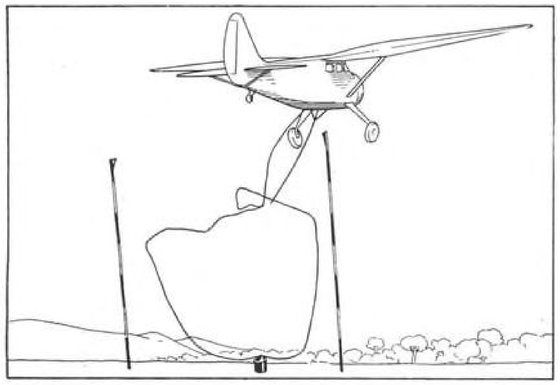


Fig. 3. Pickup boom strikes transfer loop, which slides down to hook.

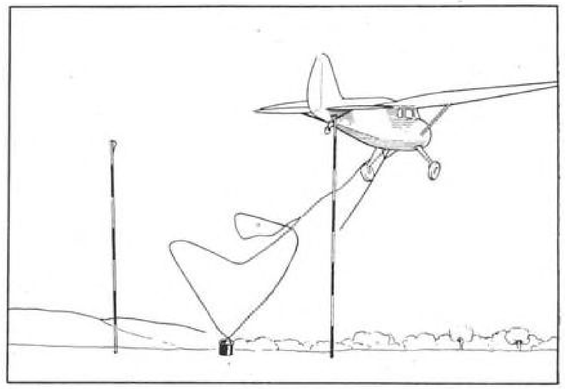
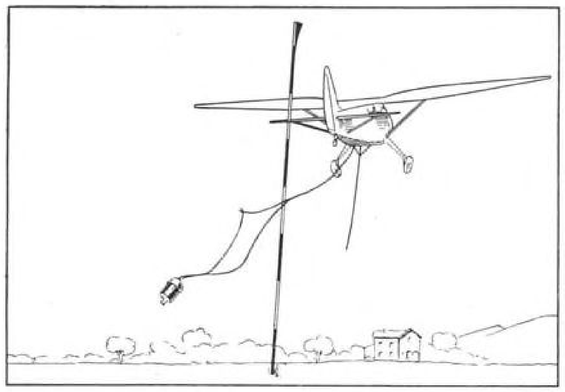


Fig. 4. Hook has been disengaged from boom. Rope is being wound up.



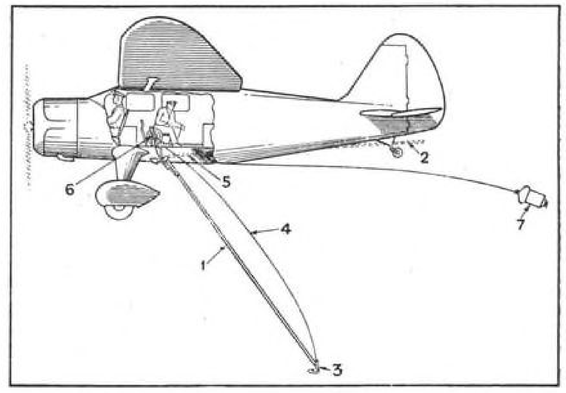


Fig 5. (above) Container about to be hauled inside plane. Fig. 6. (right) Section view of pickup plane. (1) is pickup boom, (2) indicates boom in retracted position, (3) pickup hook, (4) Nylon cord, (5) chute in bottom of fuselage for stowing packages, also recess for pickup pole, (6) accelerating and haul-up winch, (7) delivery container, which trails until released a moment before boom contacts loop.

After the pickup has been made, some device is required to cushion the first shock and in addition a mechanism is required to hoist the load into the fuselage before it can strike the ground and bounce up against the plane.

Partly by trial and error and partly through having a clear idea of requirements, the staff of AAA developed an apparatus so successful that it has been used by the Armed Forces to pick up gliders carrying the heaviest type of field equipment. The commercial package pickup operation is shown here in Figs. 1 to 5, while a section of the plane (Fig. 6) illustrates the working method.

The plane, a Stimson Reliant, carries a pilot and operator. It is fitted with a hickory boom (1), which has along its bottom surface a length of mast track (such as is used on sailing yachts instead of mast hoops for attaching sails to the mast). When not in use, the boom is carried in position (2) where it causes least drag. Hook (3), with its ⅜-in. Nylon cord (4), is placed in the track at the top of the boom and slides to the bottom in the position shown in Fig. 6. The loop of the ground package is placed on two poles, as shown in Fig. 1, the top

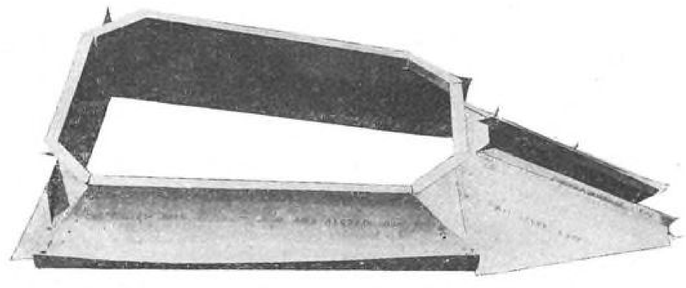


Fig. 7. Metal chute in bottom of fuselage, shown at (5) in Fig. 6.

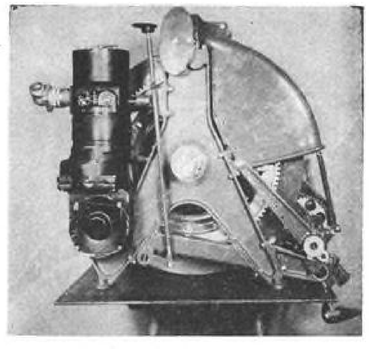


Fig. 8. Accelerating device and winch. Electric motor is at upper left, hook at lower right.


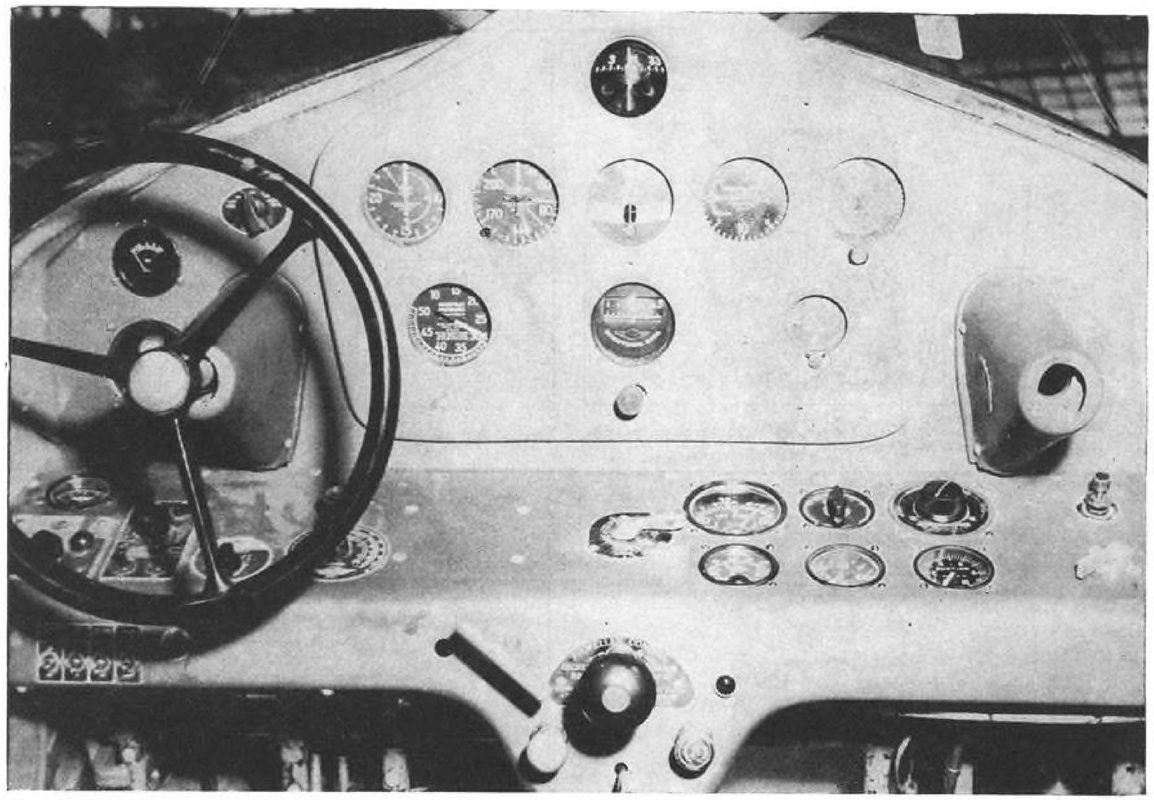


Fig. 9. Instrument panel, developed and fabricated in AAA's Pittsburgh shops. It is designed to include a gyro compass.

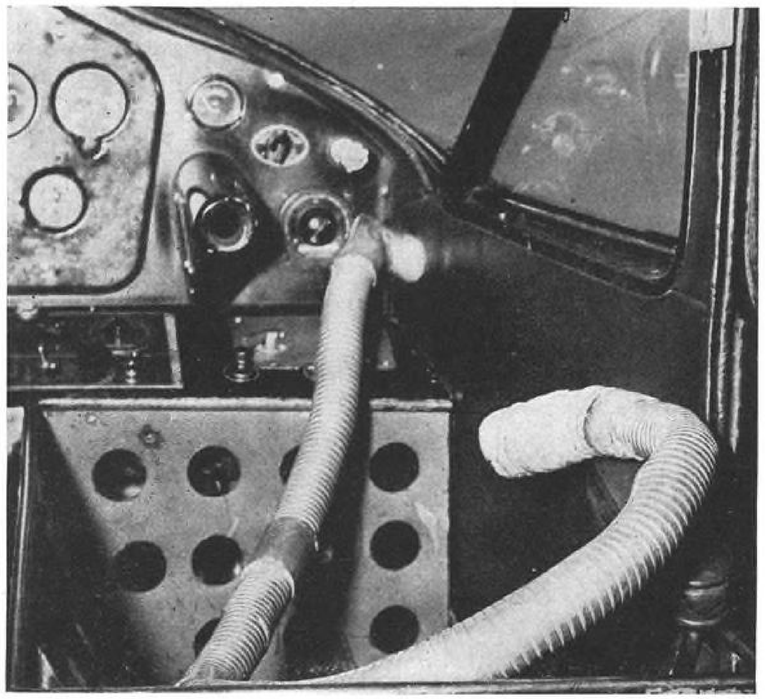

portion of the loop being in the path of the pole. When the boom strikes the loop (Fig. 2), the hook slips from the clip holding it in the track and pulls the loop from the top of the supporting ground poles (Fig. 3). After passing the pole position, the line is tightened by the plane (Fig. 4), until the container is in the air (Fig. 5).

Since the container often weighs up to 60 lb. and the pickup is made at 100 mph. only 30 ft. above the ground, the bottom of the fuselage is fitted with a stainless steel skin to prevent an accidental bounce from sending the entire container through the floor. For the same reason, a steel tubular protecting shoe is fitted beneath the rudder. The built-up chute (shown in Fig. 7) forms the opening through which packages are received and delivered.

Pickups are often made less than 5 min. apart. This speed, combined with the increasingly heavy packages being lifted, has brought development and installation of an electrically driven power winch, shown in Fig. 8.

This unit has proved of exceptional military value—for it is this equipment, in

(*Turn to page* 177)

Fig. 10. Flexible heater tube used to defrost windshield and heat rear cabin.

The B.F. Goodrich Airplane of the month

BOEING B-29 SUPERFORTRESS

SUPERLATIVES have always been used, and often too freely, in describing new warplanes. For the B-29, however, superlatives seem strangely inadequate. No one warplane has ever made such a startling debut or suggested such awe-inspiring potentialities as the Boeing Superfortress.


Little can be added here to the glowing tributes that have already appeared hundreds of times in the public press. Suffice it to say, this airplane is destined to write its own eulogy on the pages of history.

Every man and woman who helped make the B-29 possible shares abundant credit for a remarkable achievement. Adding one more handclap to a nation's applause, B. F. Goodrich salutes Boeing—names the Boeing B-29 Superfortress "Airplane of the Month."

In war or peace

B.F.Goodrich


FIRST IN RUBBER

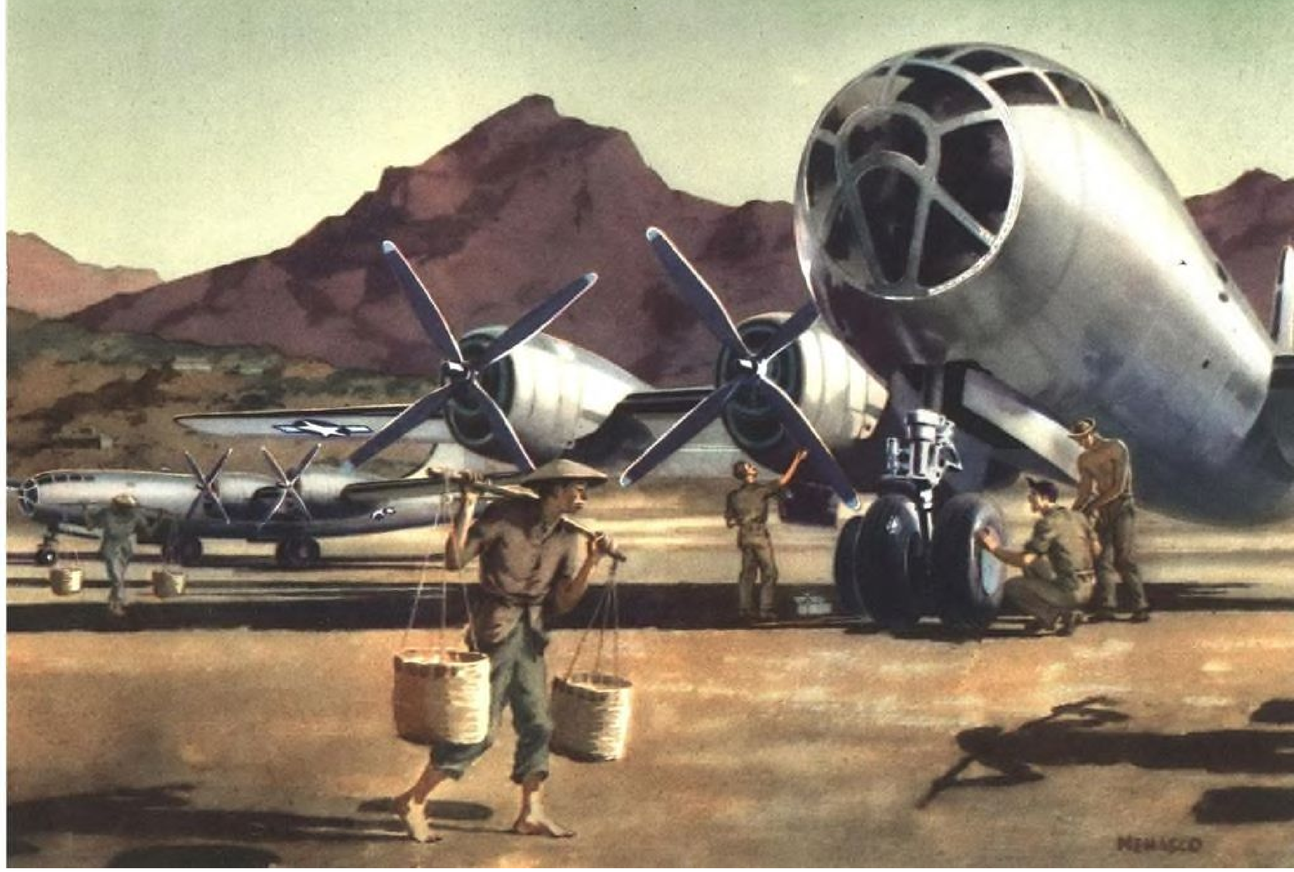



Introducing the B.F.Goodrich PRESSURE SEALING ZIPPER

Perhaps YOU can use it

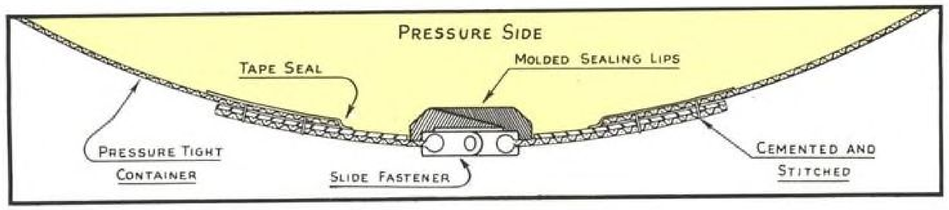

ONE of the newest products of B.F. Goodrich research is a zipper which won't let gases or liquids through, even under high pressure.

B. F. Goodrich engineers have taken a slide fastener and added a precision-molded rubber seal that opens and closes with the fastener. This seal is a unique arrangement of overlapping rubber lips which provides an effective and complete seal from zero pressures to pressures up to the structural strength of the fastener itself.

B. F. Goodrich Pressure Sealing Zippers can be applied to metal, fabric, or sheet rubber, provided a sufficient clearance is allowed for proper operation of the fastener. They may be installed by stitching or cementing, depending on application.

These zippers are effective in a wide temperature range. The rubber won't crack when bent at −70° F. nor become soft at 150° F. Weatherability is good; aging tests have shown present compound is best possible for this type of product.

Three types of B. F. Goodrich Pressure Sealing Zippers to choose from

Style 400: Non-Separating type seals throughout its entire length but is open at the top. It has a slider which can be operated from either or both sides. This type of closure may be used in applications such as exposure suits.

Style 410: Separating type; seals for entire length but not at ends. Slider operates from either or both sides. This type is now being used effectively as an aileron gap seal.

Style 420: Non-Separating type. Seals at both ends and along entire length. Slider operates from side opposite sealing lips. Originally developed as a closure for pressure vessels, it suggests many other interesting uses.

Aeronautical uses

Among the many uses suggested for this unusual closure are the following aeronautical applications: (a) For joining sections of both low- and high-pressure ducts. (b) Sealing doorways and hand-holes where there are pressure differentials. (c) Sealing bail-out kits and instrument cases. (d) Weather seals. Undoubtedly many more uses will come to our attention as people learn about the B. F. Goodrich Pressure Sealing Zipper.

Perhaps you may think of a use for it. Our engineers will be glad to call on you and discuss your applications. The B. F. Goodrich Co., Aeronautical Division, Akron, O.

ARMY NAVY
Awards to 9 plants


Skyway or Highway

B.F.Goodrich


FIRST IN RUBBER

NEW RIVNUTS FOR WIDER RANGE OF FASTENING APPLICATIONS!


RIVNUT installation is SIMPLE... FAST... FOOL-PROOF!




1. Rivnut is threaded on pull-up stud of heading tool until it touches the anvil.



2. Rivnut and pull-up stud is placed in hole with Rivnut head firmly against, and at right angles to, the work.



3. A squeeze on the tool lever retracts pull-up stud slightly, causing a lateral bulge upset of the Rivnut.



4. When pull-up stud is removed, the Rivnut can be used as a nut plate. Threads grip accessory screw firmly.

TWO NEW KINDS of B.F.Goodrich Rivnuts—Brass and Splined Aluminum—have recently been added to the line. Both of these new types, like the regular aluminum Rivnut, can be used as a blind rivet, as a nut plate for attachment, or as both at once. In addition, the new types have the same advantages as the standard Rivnut. They're simple in design (one-piece); they're compact—require a smaller hole yet have larger bearing area than any other blind fastener; they're ready for use as received. More complete information about each type is given below:

SPLINED ALUMINUM

This Rivnut is ideal for use as a nut plate in wood or plastics because the splined shank gives excellent torsion resistance. A full range of sizes and head types is available.

BRASS This is one of the newcomers—a stronger B. F. Goodrich Rivnut for blind fastening where greater tensile and shear strength is required (about 50% stronger than aluminum). Production now limited to sizes 6, 8, and 10. More sizes will be announced when available.

53-S ALUMINUM ALLOY

This is the standard Rivnut originally designed for aeronautical use and now doing hundreds of fastening jobs. It is light, strong, corrosion-resistant . . . and so easy to install, even a blind man can do it. Full range of types, sizes, grips available.



For more facts, get "RIVNUT DATA"

Contains full information on Rivnut types, sizes, grip ranges, etc.—also step-by-step illustrated installation procedure. For your copy, write to The B. F. Goodrich Company, Aeronautical Division, Akron, Ohio.



B.F.Goodrich

RIVNUT

IT'S A RIVET...IT'S A NUT PLATE

heavier adaptations, that has performed wonders at the battle fronts, picking up loaded gliders from places too small for operation by power planes.

A drum carries approximately 150 ft. of ⅜-in. Nylon cord which has a breaking strength of over 750 lb. Normally the drum is free to turn, allowing the line to start unwinding at the first tension after pickup. As soon as the drum begins to revolve, it tightens a disk brake until, when about half the line has run out, the drum has almost ceased to turn and the load is traveling at the same speed as the plane.

As soon as the drum stops, an automatic switch starts the electric motor which hauls in the cord and package. Through this automatic action, the operator is free to prepare for the next pickup. Frequently it is necessary to circle and pick up several times at one place, when mail and express shipments are very heavy.

Several changes in design of the plane itself were found desirable, not because of any deficiency in the original engineering, but because of the unusual service to which the planes have been put.

Normally the plane has had the fuse box in the floor, where it was easily accessible. But with containers bringing in snow, mud, or rain, it was found advisable to put the box in the side wall.

Fig. 9 shows the new instrument panel designed to include a directional gyro—extremely necessary where all flying is "contact" and fog hangs in the valleys for days at a time. This panel, made in the AAA shops at Pittsburgh, is a typical example of the type of work done by the maintenance force.

In a comparatively small fuselage, with a large opening in the floor through which a hurricane-like wind can travel at will, the heating problem was acute; so an additional flexible hot air tube (Fig. 10) was fitted, both to defrost the windshield and to heat the rear of the cabin where the operator worked. The end of the tube was covered with asbestos to permit it to be handled when conditions called for changing the position of the warm air.

As a precautionary measure, AAA is fully equipped to deal with and repair any accident damage which does not totally wreck a plane. A completely fitted truck, so arranged that its rear forms a nose hangar, is ready at all times to leave for any part of the territory covered by the system. To permit the emergency crew to communicate with the Pittsburgh base, a portable radio set (Fig. 11) is carried. It contains battery and reel antenna in addition to the radio equipment. By this means, the crew of the truck may notify the home base of needed parts, pieces or units, which are then flown by another plane fitted with drop equipment and parachutes for delivering heavy or delicate parts.

From two routes serving 78 daily pickups, AAA has grown to operate five averaging 275 mi. each, serving communities with populations of from 600 to 120,000 twice daily. Forty-four of these places can never have airports, some because their size would render them uneconomical, some because there is no level space in which to locate fields.

The entire United States contains 10,346 such communities having less than 1,000 people, almost all of which can be immeasurably benefited by airmail pickup. As new routes and lines are formed, the operating companies will comprise a not inconsiderable group of continuous customers for medium-size aircraft and the supplies required to service them.

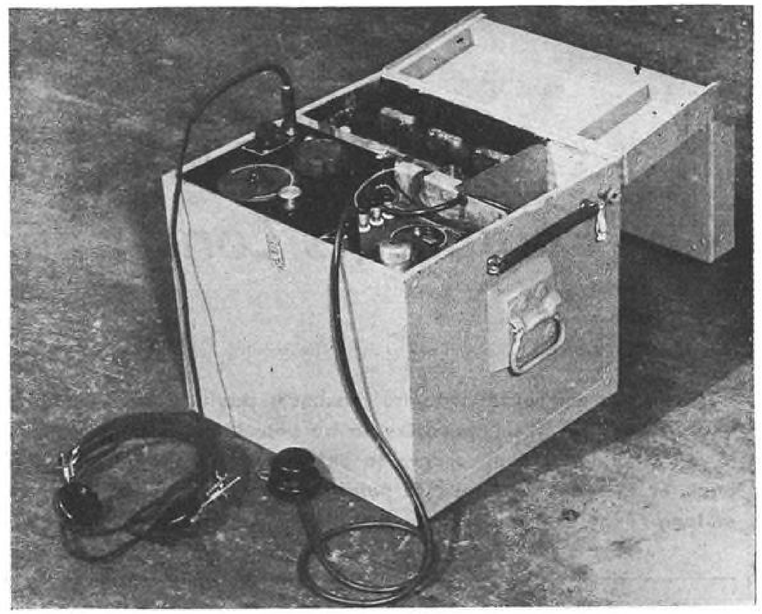


Fig. 11. Portable radio set contains battery (back left), reel antenna (back right), and short wave set (front). Cover is hinged so battery may be kept enclosed while using radio. This equipment was also designed and built at AAA's Pittsburgh shops.

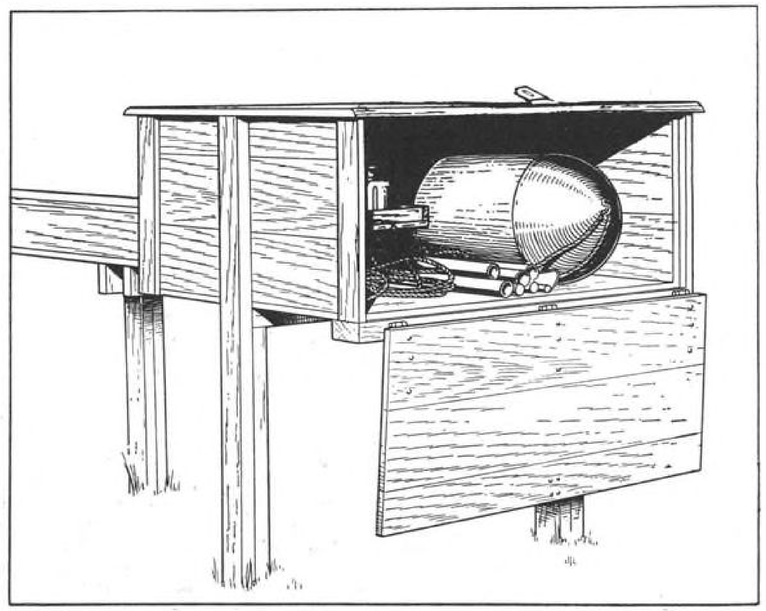


Fig. 12. The "pocket airfield." Equipment includes jointed poles, Nylon lines, flares, and a container made from heavy rubber and having a bumper on "business end".

How Calculated Cruising Foolproofs Long-Range Flights

By **JAMES B. REA**, *Engineering Test Pilot, Consolidated Vultee Aircraft Corp.*

When you're en route carrying maximum payload on a minimum quantity of fuel, it's imperative to be able to determine in a jiffy if you've sufficient fuel reserve to get you there, or to turn and fly back, or to reach an alternate point. Here's a pertinent treatment of long-range cruising technique for trans-ocean flight.

TO A FERRY PILOT delivering a plane to a distant war zone, a long-range cruising technique may well be important—but such a technique is even more important to a pilot who flies the same distance for a commercial airline. The ferry pilot usually fills his gas tank before takeoff, whereas the commercial pilot must carry a maximum payload and, consequently, a safe minimum amount of fuel.

Thus, it is essential that every commercial pilot engaged in long-range flying acquire reliable technique for determining, in flight, instantaneous information as to the fuel reserve remaining to reach the destination, to fly back to the point of departure, or to attain an alternate point, basing the calculation on the latest avigational progress and fuel consumption indications at that time.

Before this technique is discussed, the general procedure used in preparing for long-range flights should be understood.

Expert meteorologists, usually employed by the operating company, construct weather maps based on fundamental meteorological data collected at various observation stations within the vicinity of the intended route. These maps are used to forecast the weather throughout the entire flight-path area between the points of departure and destination.

The optimum track and altitude to be flown are then decided. Obviously, if the weather were not a factor, a great-circle track would be chosen so as to cover the shortest distance. But since winds, fronts, etc., must be considered, the optimum track is usually a compromise between a great-circle track and one which is chosen with regard to winds only. Sometimes a track must be chosen which will avoid hazardous weather regardless of increase in flight time and consequent loss in payload.

Here are some of the factors to be considered in choosing an optimum altitude:

1. Wind velocity varies with altitude, both in magnitude and direction, and the optimum altitude chosen, or combination of altitudes chosen, should take this into account.

2. The altitude should be chosen with regard to clearance of cloud tops. A flight made "over the top" is considerably smoother, and much easier on passengers and crew. It allows the plane to settle down to relatively stable conditions with a slight increase in airspeed. Avigation is made steadier, stars are more likely to be visible, and star sights are more accurate in the smoother air above the clouds.

3. In choosing an optimum altitude, consideration must also be given to overall powerplant efficiency. The most efficient altitude for any particular installation usually depends upon the type of carburetor used and the characteristics of the supercharging installation.

4. Extended flights at altitudes greater than 10,000 ft. in airplanes without supercharged cabins are enervating to passengers and crew if oxygen equipment is not used.

Once the track and altitude have been decided, a complete flight analysis is made as follows: The track is divided into zones, and the average wind to be expected in each zone is determined from the weather map. Knowing the average gross weight for the plane in each zone, as determined by fuel consumption consideration, and knowing the average wind, also the altitude to be flown in each zone, an optimum airspeed is determined from performance curves so as to obtain a maximum number of miles covered per pound of fuel burned.

It may be found that when total costs are considered, a speed higher than maximum range speed is most economical. With this optimum airspeed and average wind, the ground speed and time through each zone is computed. Total flight time is simply the sum of the zone flight times.

The basic amount of fuel to be taken is primarily a function of the total forecast flight time. In addition to this basic amount, a reserve must be carried. With four-engine equipment operating long-range over water, this reserve should be based on: (1) The possible necessity of three-engine operation, (2) the time on four engines required to reach the three-engine equi-time point, and (3) the general knowledge of forecasting acquired by the operating company through past experience in long-range flying.

The equi-time point is that from which it would take just as long to continue to the point of destination as it would take to return to the point of departure.

Distance to ETP$_3$

The time on four engines required to reach the three-engine equi-time point is determined by first calculating the distance to the three-engine equi-time point, then dividing this distance by the average ground speed out on four engines. The distance to the three-engine equi-time point, ETP$_3$ may be determined by the formula:

$$d_f = \frac{D \times S_{rsf}}{S_{rsf} + S_{esf}}$$

where d_f is the distance to the ETP$_3$ as of forecast, D the total track miles to the destination, S_{rsf} the average ground speed to return on three engines as of forecast, and S_{esf} the average ground speed to continue on three engines as of forecast.

It seems obvious that the most important questions to be answered in long-range cruising technique are:

1. How much fuel has been used?
2. Are we ahead or behind our forecast schedule?
3. Do we still have the proper fuel reserve to continue to our destination with safety?

The answer to the last question is the most important, and it is dependent on knowing the answers to the other two. Avigation alone is responsible for the answer to the second question, while fuel gage readings indicate the answer to the first.

Information determined by the avigator as to whether the flight is ahead or behind schedule means nothing in determining if there is a proper reserve to continue to the destination—unless it is known how much fuel has been used. For example, an airplane may be ahead of scheduled forecast time only because of high airspeeds resulting from excessive power and over-consumption of fuel.

One of the simplest methods for determining, in flight, the continuous up-to-the minute answers to these questions, is to compare the actual fuel consumption with forecast normal fuel consumption and, at the same time, to compare the actual avigational progress with the forecast avigational progress. A graphic means for indicating the answers is shown by the following example of long-range trans-ocean "Howgozit" technique:

First, the total amount of fuel to be taken on a flight is determined. If the optimum altitude as computed from the flight analysis is 10,000 ft., and if the total forecast flight time at this altitude is 16 hr., then the basic amount of fuel could be 18,260 lb., as determined from long-range performance curves of fuel consumption vs. flight time for various altitudes and head wind components.

The reserve to be carried, in addition to the basic amount, may be obtained from a typical curve as shown in Fig. 1. If, based on the flight analysis, the time on four engines required to reach the three-engine equi-time point is 9 hr., then the reserve from the origin to ETP$_3$ will be 1,490 lb., and the reserve from ETP$_3$ to the destination will be 1,995 lb. An additional reserve of 1,200 lb. is required for the possible necessity of flying another hour on three engines after arrival. Thus, the total reserve would be 4,685 lb., and the total amount of fuel to be taken is 22,945 lb. The foregoing figures are merely examples and do not necessarily represent fuel consumption values for any particular plane.

Immediately after takeoff, a curve of normal fuel consumption is plotted vs. Greenwich Civil Time, as shown in Fig. 2. The data used for drawing this curve are obtained from fuel consumption and performance information based on flight test data.

For example if the takeoff (see Fig. 2) is at 0030 G. C. T., and if the performance curves for long-range cruising at 10,000 ft. indicate that it will take 45 min. to climb to that altitude, and that 1,600 lb. of fuel will be consumed during the climb, then a point is located at 1,600 lb. under a G. C. T. of 0115 to indicate the end of the climb. For 8 hr. of flight time, the performance curve indicates 9,900 lb. consumed and the G. C. T. would be 0830, etc.

Next, a curve of reserve vs. G. C. T. is drawn from the point at the end of the climb through the point of 1,490 lb. of reserve at the ETP$_3$ (0930 G. C. T.), and through the point of 3,485 lb. reserve at the end of the 16 hr. flight (1630 G. C. T.). This latter reserve does not include the 1,200 lb. carried for the possible necessity of flying another hour on three engines after arrival.

A table is then made for fuel consumption and avigational score at various G. C. T.'s. On every hour during the flight, the engineer enters the amount of fuel consumed as determined from his gages, and the avigator enters the avigational score—plus, if ahead of forecast, and minus if behind. From the data in this table, a progress line is plotted.

For example, at 0700 G. C. T. the fuel consumed is 8,500 lb. (an over-consumption of 420 lb.) and the flight is 12 min. behind forecast. Thus, the progress line runs through point *A* which is placed 12 min. to the left of the actual fuel consumption point of 8,500 lb. at 0700 G. C. T. A curve of actual consumption vs. G. C. T. may also be drawn (but is not shown) in Fig. 1.

By noting the relation between the progress line and the reserve line, it can easily be determined whether it is advisable to continue or return to the point of departure. If at the ETP$_3$, the slope of the progress line is such that it looks as though it will intersect the reserve line before completion of the flight, it is advisable to return.

The three-engine equi-time point is critical on long-range flight, not only from the standpoint of fuel reserve but also from the standpoint of possible engine failure. If an engine should stop before this point is reached it would take less time to return on three engines than it would to continue the flight.

Also, if failure of one engine happened to occur at, or near, the ETP$_3$, it would still be advisable to return because the winds to be encountered on the way back would probably be the same as those encountered on the way out and would be more dependable than the forecast winds ahead. But if an engine should fail after the ETP$_3$ had been well passed, it would obviously be logical to continue to the destination.

Shifting Equi-Time Point

It is current practice to shift the forecast ETP$_3$ by an amount equal to the time ahead or behind forecast. For example, if when approaching the forecast ETP$_3$ it is found that the flight is ahead of forecast, the time to the new or up-to-the-minute ETP$_3$ is found by decreasing the time to the forecast ETP$_3$ by the amount that the flight is ahead of forecast. Similarly, if the flight is behind forecast, the time to the new ETP$_3$ is increased by that amount.

It seems obvious that the time to the ETP$_3$ should be increased when behind forecast and decreased when ahead of forecast, but it is not obvious that this change should be just equal to the time ahead or behind forecast. The following is a mathematical proof justifying the practice of shifting the forecast ETP$_3$ by an amount equal to the time ahead or behind forecast:

Symbols—

D = Total track miles to destination.
S_{rsf} = Average ground speed of return on three engines, as of forecast.
S_{esf} = Average ground speed to continue on three engines, as of forecast.
S_{osf} = Average ground speed out on four engines, as of forecast.
S_{rsn} = Average ground speed of return on three engines, as of new.
S_{esn} = Average ground speed to continue on three engines, as of new.
S_{osn} = Average ground speed out on four engines, as of new.
d_f = Distance to ETP$_3$, as of forecast.
d_n = Distance to ETP$_3$, as of new.
t_f = Time to ETP$_3$ as of forecast.
t_n = Time to ETP$_3$ as of new.
t_{af} = Actual time to arrive at forecast ETP$_3$.

Time ahead = $t_f - t_{af}$ = time ahead of forecast.

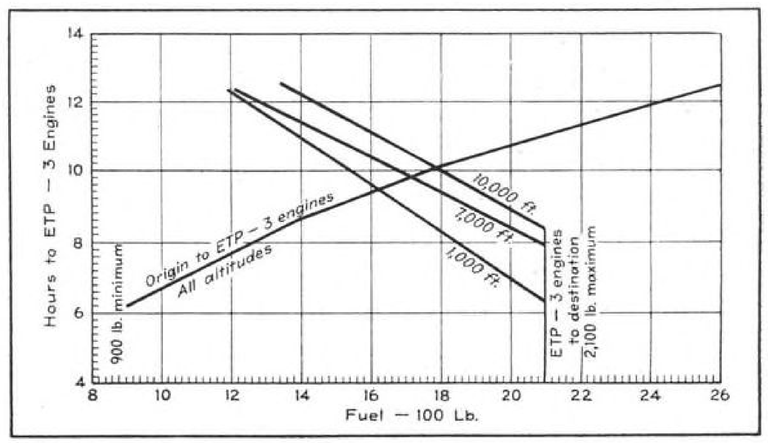


Fig. 1. Graph of fuel reserve required from origin to three-engine equi-time point, and from latter to destination.

ETP = Equi-time point.

To prove:

$t_f - t_n$ = Time ahead of forecast.
$t_n - t_f$ = Time behind forecast.

Proof:

$$d_f = \frac{D \times S_{r3f}}{S_{r3f} + S_{c3f}} \quad (1)^*$$

$$\text{Also, } d_n = \frac{D + S_{r3n}}{S_{r3n} + S_{o2n}} \quad (2)^*$$

$$\text{and, } t_f = \frac{d_f}{S_{o4f}} = \frac{D \times S_{r3f}}{S_{o4f}\,(S_{r3f} + S_{c3f})} \quad (3)$$

$$\text{also, } t_n = \frac{d_f}{S_{o4n}} = \frac{D \times S_{r3n}}{S_{o4n}\,(S_{r3n} + S_{c3n})} \quad (4)$$

Combining equations (3) and (4), and rearranging,

$$t_n = t_f \left(\frac{S_{o4f}}{S_{o4n}}\right)\left(\frac{1 + \frac{S_{c3f}}{S_{r3f}}}{1 + \frac{S_{c3n}}{S_{r3n}}}\right) \quad (5)$$

But, for lack of better information, it is current practice to consider $S_{c3n} = S_{c3f}$. In other words the new three-engine speed to continue should be considered the same as the forecast three-engine speed to continue, in absence of additional forecast data.

Thus,

$$t_n = t_f \left(\frac{S_{o4f}}{S_{o4n}}\right)\left(\frac{1 + \frac{S_{c3f}}{S_{r3f}}}{1 + \frac{S_{c3f}}{S_{r3n}}}\right) \quad (6)$$

To a very close approximation, the factor

$$\left(\frac{1 + \frac{S_{c3f}}{S_{r3f}}}{1 + \frac{S_{c3f}}{S_{r3n}}}\right) = 1$$

And so,

$$t_n = t_f \left(\frac{S_{o4f}}{S_{o4n}}\right), \text{ approx.} \quad (7)$$

Actual experience has shown that the accuracy of equation (7) is well within the limits of avigational error, thus justifying the use of this simplified form as compared with equations (5) and (6).

$$\text{Also, } S_{o4n} = \frac{d_f}{t_{af}} \quad (8)$$

Thus, from eq. (8), $\frac{S_{o4f}}{S_{o4n}} = \frac{S_{o4f} \times t_{af}}{d_f}$

But, $t_f = \frac{d_f}{S_{o4f}}$

So, $\frac{S_{o4f}}{S_{o4n}} = \frac{t_{af}}{t_f}$ (9)

Combining equations (7) and (9), we have,

$$t_n = t_f \times \frac{t_{af}}{t_f}$$

$$\text{or, } t_n = t_{af} \quad (10)$$

But,

$t_{af} = t_f -$ (time ahead of forecast).
$= t_f +$ (time behind forecast).


Thus,

$t_f - t_n$ = time ahead of forecast.
$t_n - t_f$ = time behind forecast.

Thus, it has been proved that the new ETP_3 may be determined by shifting the forecast ETP_3 by an amount equal to the time ahead or behind forecast. It should be shifted ahead if behind forecast, and behind if ahead of forecast.

Though a plane may be inherently efficient, it is of little value to a commercial company operating long-range flights unless a reliable and economical cruising technique is thoroughly understood by the operating personnel.

* To justify use of equation, see any standard derivation for distance to ETP.

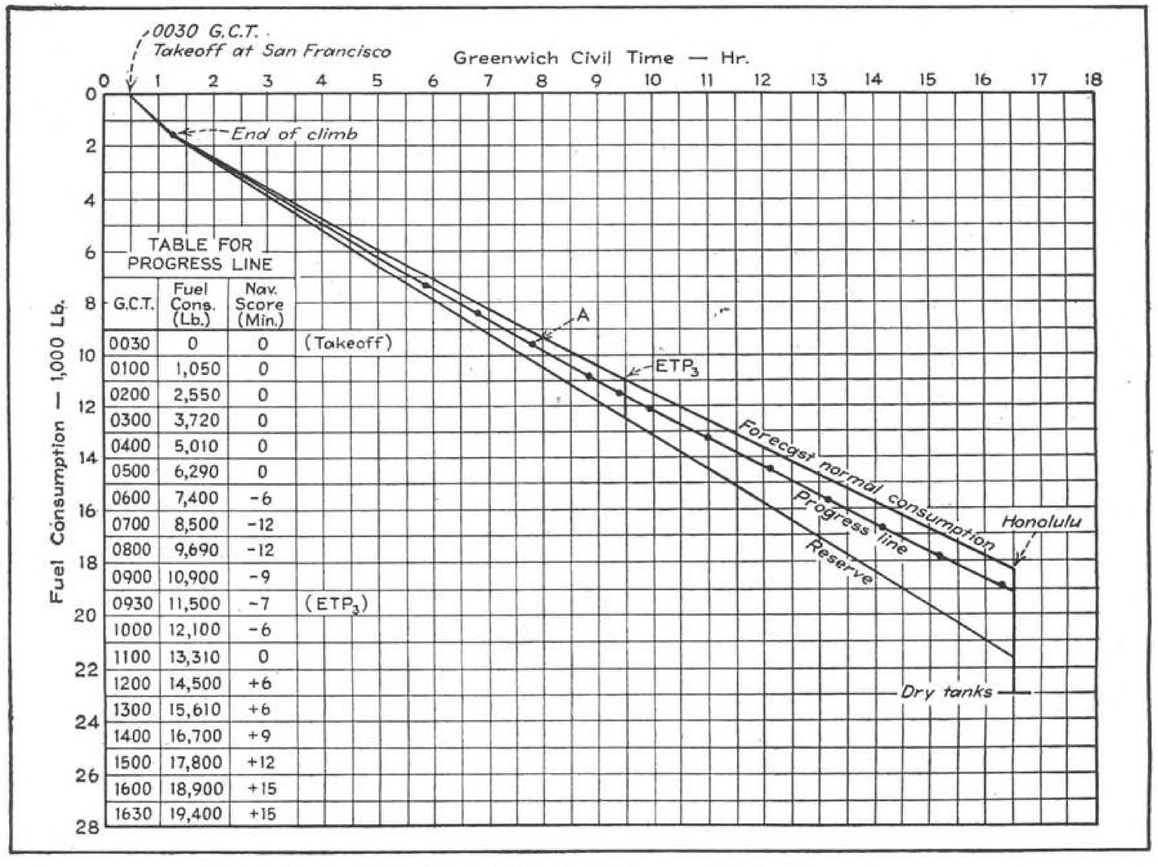

G.C.T.	Fuel Cons. (Lb.)	Nav. Score (Min.)	
0030	0	0	(Takeoff)
0100	1,050	0	
0200	2,550	0	
0300	3,720	0	
0400	5,010	0	
0500	6,290	0	
0600	7,400	-6	
0700	8,500	-12	
0800	9,690	-12	
0900	10,900	-9	
0930	11,500	-7	(ETP_3)
1000	12,100	-6	
1100	13,310	0	
1200	14,500	+6	
1300	15,610	+6	
1400	16,700	+9	
1500	17,800	+12	
1600	18,900	+15	
1630	19,400	+15	

Fig. 2. "Howgozit" graph of normal fuel consumption plotted against Greenwich Civil Time, for San Francisco-Honolulu flight at 10,000 ft.

Airspeed-Dial Device Simplifies Range Procedure

By CHARLES A. MOBLEY,
Aerodynamic Research Engineer, Lockheed Aircraft Corp.

For the military pilot, attainment of maximum range is a prime "must." This dial card was designed to tell him how—in less than 30 words.

BRIEF AND EXPLICIT data to assure maximum-range operation is of major importance to our military pilots flying against the Axis. Accordingly, extensive study has been made of ways to present information to aid in achievement of such performance, but while there has been steady improvement in attacking the problem, methods have remained rather conventional.

Now, however, a special procedure for obtaining maximum range has been conceived—a procedure employing a durable card device, with a hole in the center for attachment over the pilot's airspeed indicator dial. This location was selected since the most important factor affecting maximum range is airspeed.

The optimum airspeed for best range is indicated by a bright red arrow, the location of which is corrected for position error and parallax. In addition, the ship's indicated airspeed is printed in bold type on the arrow in case some installations may not agree properly with the airspeed instrument scale. The card is printed in red and white on a black background, and the surface is varnish-coated on both sides for protection from moisture.

To arrive at the rules, the factors affecting maximum range were studied, and this information, based on tenets in the *Pilot's Handbook*, was condensed to less than 30 words which constitute the five rules for maximum range operation.

Rule 1 (see condensed procedure data on card in illustration) insures operation near maximum L/D for the usual operational gross weights. Rule 2: Makes r.p.m. the major variable. Rule 3: Insures operation near maximum bmep for efficient engine operation. Rule 4: Stipulates mixture and blower settings for maximum range. And Rule 5: Prevents operation at too low an engine speed, which would cause mixture enrichment and possible difficulty with the generator cutting out.

Located directly in front of the pilot, the card serves to remind him of correct operating procedure whenever economy is desired. Many mistakes are thus avoided, and the effective service range of the aircraft is materially improved.


This increase in service range may in some cases amount to 10 percent. Considered from another angle, the payload may be increased by 10 percent of the gross fuel weight. For a plane with 1000-gal. normal fuel supply, a 600-lb. increase in bomb load may be realized. Evaluating this additional bomb load on the basis of $200 per pound increase in payload, as would be the minimum in the case of a commercial airplane, the increased value, over the life of the aircraft, would amount to $120,000. The true military value may be even higher.

Analysis shows that the five simple rules will result in ranges within 3 percent of maximum possible obtained by varying speed with gross weight and suiting engine and propeller settings to flight conditions. Over the range of gross weights normally used in patrol activities, the difference is even less, amounting to about 1½ percent.



Procedure card for obtaining maximum range is attached over airspeed indicator. Photograph shows dummy airspeed indicator dial with card in position over it. Arrow indicates best speed for maximum range and number on arrow is plane's indicated airspeed, assuring agreement between installation and airspeed instrument scale.

Mexico Offers Flyers Thin Air . . . And Opportunities

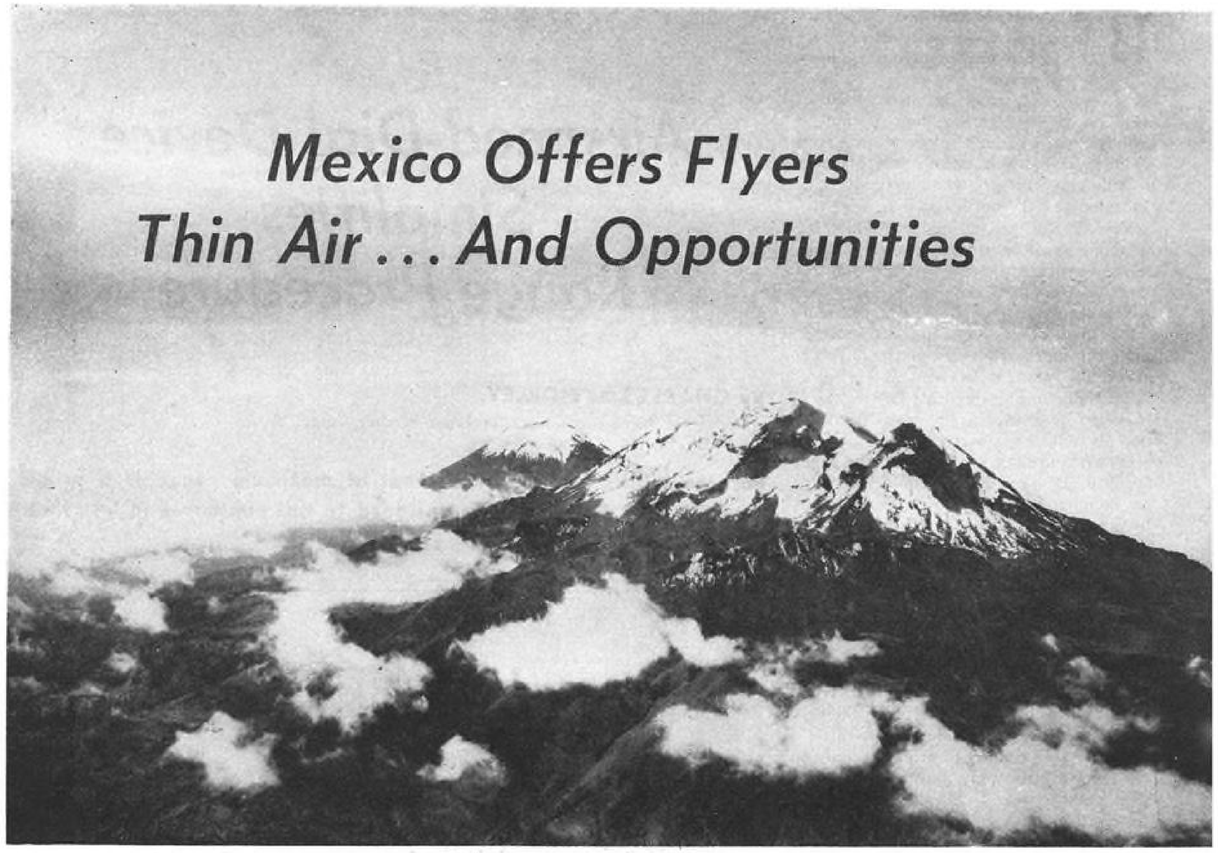

Two of major peaks which landmark rugged terrain for flyers in Central Mexico are the volcanoes Ixtachihuatl (above, left) and renowned Popocatepetl (right), rising 16,883 ft. and 17,887 ft., respectively. These "three-milers" are 50 mi. southeast of Mexico City. Photo below shows Balbuena Field, Mexico City's central airport. Lake Texcoco can be seen beyond field. Mountains in distance are 11,000 ft. high.

(PAA and Cia. Mexicana photos)

By **JUAN NOLAN C.**

Below the border—where the airman finds high altitudes "make things happen faster"—there's plenty of room for both pleasure and profitable flying. But, says Author Nolan, the crying need for aviation facilities continues to be a barrier.

PILOTS CONTEMPLATING A FLIGHT to Mexico City will be smart if they brush up on their knowledge of thin air. For here, with a takeoff altitude of 7,300 ft. and required ceilings of 11,000 or more, just to ease over the lip of the cup which is the Valley of Mexico, one must know the vagaries not only of thin air, but of strong up-drafts, down-currents, and other quick changes in the peculiar, unseen element which keeps us aloft.


So here we fly high as a matter of course, and the air is light as the proverbial feather. All pilots know that the higher one takes an airplane, the more it runs out of power. All know the reverse, too, that the heavier the air the better our airplane behaves and responds. Yet here, despite the drastic changes (as compared with what pilots in the United States of the North are used to) flying requires no special trick or unusual aptitude to accustom oneself to local conditions.

These local conditions are neither new nor different, they only require a more precise type of flying—demand alertness backed by a sound understanding of the makeup and behavior of the particular air in motion above this tableland.

Only one warning for such projected flights: Don't pick up any new ideas of what to do, or how to do them. The same principles of flight as one learns during his training period, obtain down here (or up here, if you will), as obtain at sea level. The only difference is that things happen much faster. Instrument readings remain the same and the pull of gravity does not vary. This is a great advantage, for it will aid the newly arrived pilot in that he does not have to change his reactions, only just speed them up. Even so, his takeoff runs will be much longer and his landing glides much shorter. The landing speed increases, but he will never know it by his instruments, for at altitude the airspeed indicator will show "regular," which is actually too low.

High altitude flying has many advantages, particularly through the economies effected in gasoline consumption. Take for example the small personal plane making a flight between Mexico City and Acapulco. Without a reserve gas tank and if faced with adverse wind currents must be conjured with in operating from this strip between mountains and water. Note tortuous ravine approach from east.

Demanded in Mexico, says author, is "a more precise type of flying," and this view of airport at Acapulco emphasizes his statement. Air

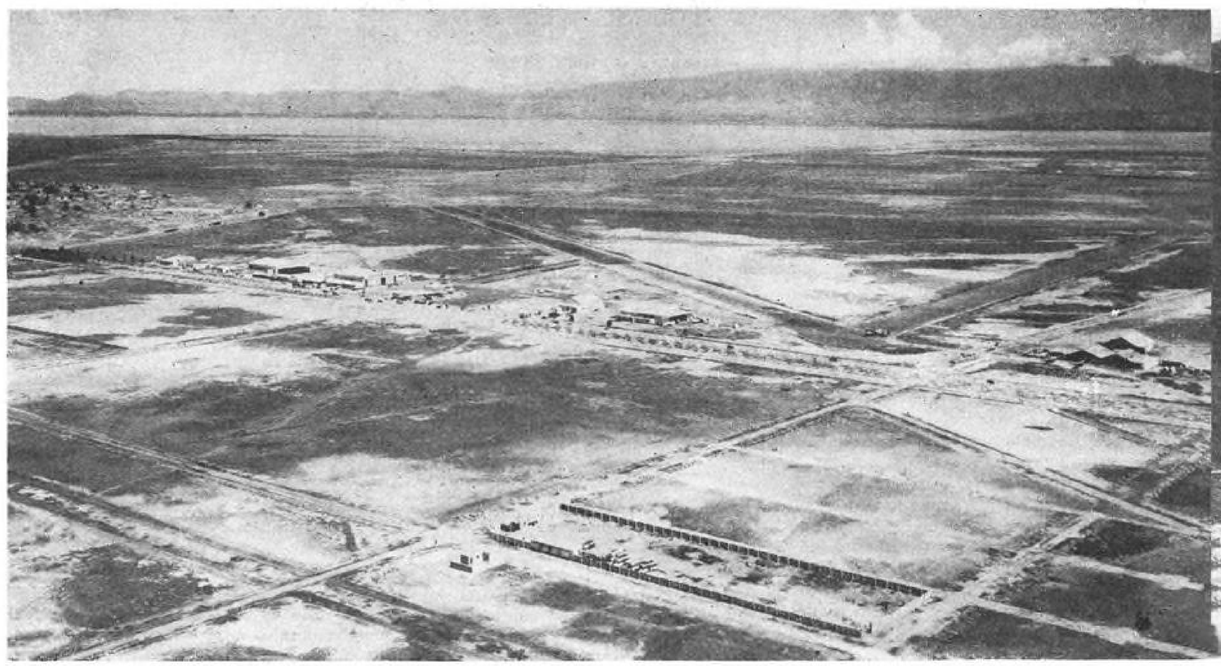



Juan Nolan C., *author of this article, is a North American who has resided for the past several years in Mexico City. President and general manager of Laboratorios Winthrop, S. A., he is a member of the University Club and of Mexico's oldest scientific body, La Sociedad Mexicana de Estadistica y Geografia, founded 114 yr. ago.*

Having received his flight training and ground school education under Mexican instructors, he is a qualified Piloto Privado, holding license No. 590. His knowledge regarding aviation facilities, cross-country operations, and equipment throughout the Republic has been gained through personal experience with local conditions.

Mr. Nolan is convinced that "post-war flying in Mexico presents more opportunities for more people than any other part of the Western Hemisphere, with the possible exception of Canada". His avowed purpose is to awaken this understanding, particularly among the Mexicans themselves, so that the end of the war will find them ready to take advantage of the possibilities which lie ahead.

ditions, it might be necessary to come down in Chilpancingo for more gasoline (assuming that altitude is maintained at ordinary levels in accordance with the contour of the country). By this time one may want a faster airplane or one with a longer range. As it is, one stands to lose time, maybe an hour, if gasoline isn't handy, and besides adverse conditions may get worse. Yet from Chilpancingo one needs only 40 min. more to complete the flight.

But, if your airplane engine regularly consumes 20 gal. for every hour of flight at ordinary levels, and after leaving the Valley of Mexico one can fly at these ordinary levels—then by going to 10,000 ft. one can stretch the gasoline supply to obtain 30 (not 20) miles per gallon. In short, higher flying—farther traveling.

It is all really very simple and based on the economics of high altitude flight. Your engine, running high in the sky, just uses less gasoline, thats all. It loses some speed, it is true; but this is offset by increased distance obtained per gallon of gas. Here is one place where one actually obtains something for nothing. Instead of landing in Chilpancingo (as in the example above) for needed gasoline, one can, by flying at a constant altitude of 10,000 ft. arrive in Acapulco in a little more time, but with more than enough gas to spare.

Thus the advantages of flying in high altitude conditions (by necessity obtaining in most of Mexico) are more than offset by the slightly higher horsepower required here than in sea-level conditions —with accordingly higher landing speeds and the "hotter" flying which this high altitude requires of pilot and plane.

Because of the thin air prevailing in the mountainous regions throughout Central Mexico, visibility conditions are for the most part excellent. Added to this, the marvelous landmarks in the form of three-mile-high volcanoes (there are three of these three-milers, count 'em) each with snow covered peaks, allow the average pilot to soon recognize his location and judge his heading.

Mexico's climate, at least that half which is affected by a backbone line drawn from North to South through its approximate center, is ideal all the year 'round. Storms which arise only between October and April are mostly confined to the East Coast and take the form of *nortes* originating around Vera Cruz. Because of the long, high-level Sierra Madre range running north and south, these *nortes* seldom carry their effects to the western side of the range. For this reason open flying obtains practically all year in the sizable area bounded on the north by the U. S. frontier, on the south by Guatemala, and to the west by the Pacific Ocean. For this reason also, nearly all the tourist travel to seaside and vacation spots is toward the west.

Recently the writer, without making detailed inquiries as to flying conditions (although the newspapers ran stories of storm damages on the East Coast), decided to fly to the Isthmus of Tehuantepec. Inquiries at the field revealed that a strong *norte* was blowing and that the run to Vera Cruz was closed in. Despite strong adverse weather conditions, which at times ranged no more than 20 mi. parallel to the true course, he was able to fly by way of Oaxaca under ideal conditions. Only upon arrival at Ixtepec, the end of the run, had the wind increased in velocity, due to the funnel shape of the Isthmus itself, but this wind was still lowered somewhat by the same friendly range of mountains which here acquires the name of Continental Divide.


The now-ancient art of barnstorming disappeared from flying's last outposts in the United States quite some years ago. But its sun has not yet set in Mexico. During the trip described above, and after arrival and a night's rest in Ixtepec, your correspondent set out next day for an isolated spot variously called Jesus Carranza or Santa Lucrecia. Though this is a well known railway junction town (here meets the branch line from Puerto

(*Turn to page 276*)

Too many Mexican airfields continue to be cursed by poor facilities, declares Mr. Nolan. Important centers, he says, still afford only grass runways and temporary maintenance equipment flanked by barreled gasoline, as exemplified by shots of old Carmen airport (below, right) prior to its modernization. As seen left, Carmen layout, which serves CMA line, PAA subsidiary, is now up to date. It has mile-long concrete strips, underground fuel tanks, radio and meteorological stations, and complete lighting supplied by its own generating plant.






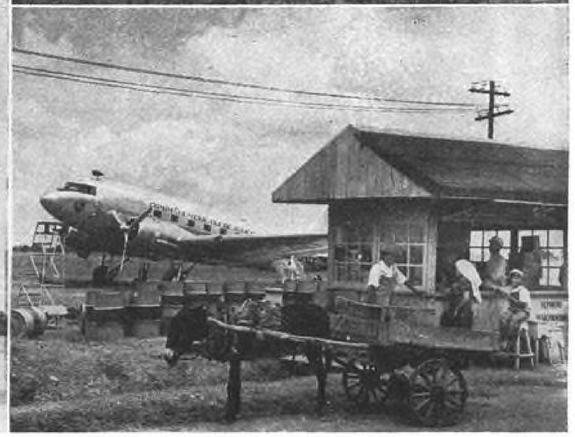

Parks Plane-Buying Plan Combines Time Payments, Insurance

Arrangements including participation by bank and insurance underwriter sets pace for postwar personal plane financing on local basis.

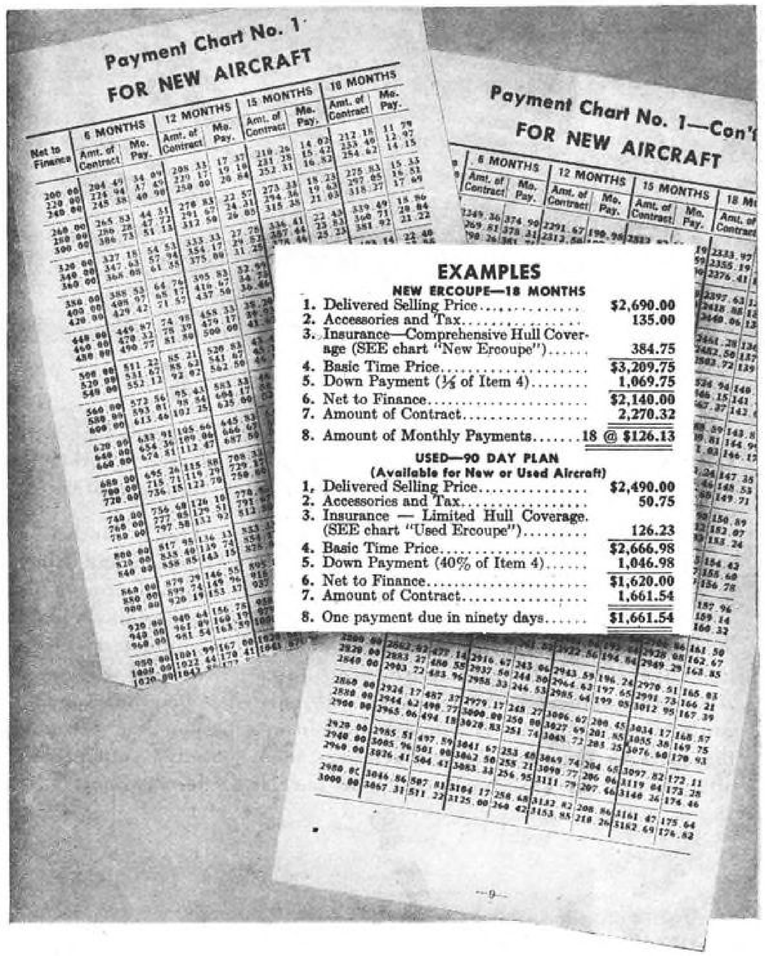

A COMBINED time-payment and insurance plan for the purchase of personal aircraft—a plan pointing the way to local financing and coverage—has been put in operation by Parks Aircraft Sales & Service, East St. Louis, Ill., in conjunction with the Manchester Bank and General Insurers, Inc., both of St. Louis.

An integral part of the plan sets forth rates which will reduce insurance costs from 35 to 50 percent on purchases of new and used Ercoupes, for which the Parks organization is Midwest distributor. These rates, according to C. J. Muckerman, head of General Insurers, were figured on the basis of the craft's spin-resistant two-control characteristics.

Said to be unique is a feature of Ercoupe plan under which members of the purchaser's immediate family, or any certified pilot having permission, may fly the craft without increased insurance rates. Thus the policy may cover flight activities of several individuals in contrast with other policies under which only the purchaser or other specified individuals are protected.

The purchaser may select any of three types of policies: Limited hull coverage, written specifically to fit the Ercoupe; named peril coverage, limited to stated risks on the craft; and, comprehensive hull coverage, which is approximately the same as the so-called all-risk policy of standard aviation insurance, the broadest coverage which is written on personal planes.

Limited hull rates are reported as $4.50 per $100 of insurance, named peril $6.50 per 100, and comprehensive hull $9 per $100.

In addition, coverage may be obtained at standard rates for liability and property damage and passenger liability when the planes are not operated for hire.

The Manchester Bank has prepared a booklet for salesmens' use giving details on: procedure of aircraft financing; general instructions on use of time payment contract forms; limitations and requirements of such contracts; examples of 90-day and 18-mo. contracts on new and used Ercoupes; insurance plans for that craft; insurance term definitions; procedure for financing craft other than Ercoupes; payment charts for 90-day, 6- and 12-mo. contracts on both new and used craft; hull insurance premiums on both new and used Ercoupes and other aircraft types; passenger, liability, and property damage premium tables; and prewar new list prices covering more than 250 different models of aircraft.

Procedure on financing, for examples, is given in the following steps:

First, set up delivered selling price; and accessories (if any) and tax; add insurance; total these three items to arrive at the basic time price; calculate the down payment (33 1/3 percent on new craft, 40 percent on planes over six months old); subtract this item from the basic time price to determine the net amount to finance; establish, from old and new model payment charts, the total contract amount; establish amount of monthly payments according to length of the contract.


Additional steps give instructions for setting up the purchaser's credit statement; advising him on insurance; arranging even-amount time payments; dispatching the contract for credit investigation; and, finally, drawing draft on the bank.



NEWSWEEK of August 28 reports of Lieut.-General George S. Patton, Jr., as follows: "If he had to choose between tanks and bulldozers for an invasion he would choose road-building equipment every time." More than a construction machine, the bulldozer has been a powerful factor in winning many battles.

To quickly, efficiently fit axle shafts and bearing cups into bulldozer transmission cases, *American* engineers designed a special horizontal assembly press. A conveyor line brings the cases to the machine and removes them after operations are completed. The part is stopped, locked in position, pressed, and released by this hydraulically operated, push button controlled machine.

This is another example of how the American Broach and Machine Company help leading manufacturers increase output of vital war materials. When the war job is done, *American's* complete service of machines, tools, and engineering will be available to speed manufacture of civilian goods. Let *American* engineers show you how broaching or special machinery can solve your production problems. Write today for details.

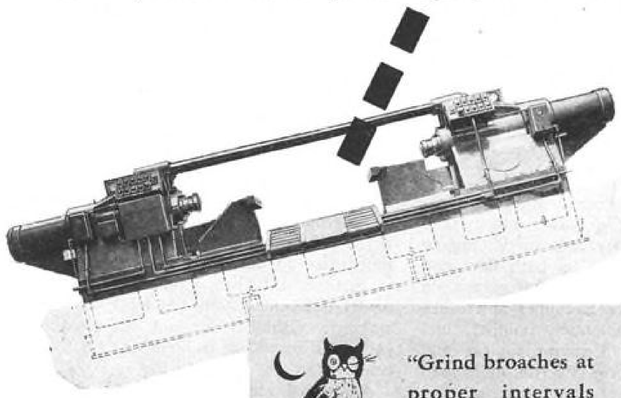



"Grind broaches at proper intervals to prevent loss of broach life."

MEMBER BROACHING TOOL INSTITUTE

American BROACH AND MACHINE CO.

ANN ARBOR, MICHIGAN

•

BROACHING MACHINES
PRESSES
BROACHING TOOLS
SPECIAL MACHINERY

DIVISION OF SUNSTRAND MACHINE TOOL CO. ROCKFORD ILLINOIS U.S.A.

Canada Sets Up Beam-Approach Flight School

By **JAMES MONTAGNES,** *Canadian Correspondent, "Aviation"*

New training course gives technical and flight instruction to Commonwealth Training Program pilots in concentrated effort designed to make them "weather free" fighters.


A PART of every Royal Canadian Air Force pilot's training today gives him the ability to return to his home airfield and land safely, no matter how black the night or dense the fog. This skill is taught at the RCAF's recently established beam approach training school at Deseronto, Ont., where World War I pilots learned to fly a quarter-century ago.

The new training station, first instrument flying training school to be set up in Canada, is claimed by the RCAF to be the only school among the Allied Air Forces to combine on one station courses in beam approach, beam approach technical training, and Link trainer. It is staffed by veterans of bombing missions over Germany and by top-flight instructors from the RCAF and RAF.

The school is turning out instructors in beam approach flying for all twin-engine service flying training schools across Canada so that bomber pilots graduating under the British Commonwealth Air Training Plan will be well grounded in this newly developed method of "homing" and controlled "let down" while they are still in the training stage. Moreover, the school is turning out Link trainer instructors and maintenance crews for the installation and repair of aircraft and ground equipment used for beam approach radio communication.

The Deseronto station had the first beam approach equipment in Canada; as a result, on days when aircraft at other fields in the Dominion were kept to the ground by low-hanging clouds and fog, aircraft were flying there day and night. Icing is virtually the only flying hazard feared, for it renders aircraft unserviceable and is apt to freeze over the instrument apertures.


At first regarded as a sort of black magic which only super-pilots could master, the beam approach system can be learned by anyone who can fly on instruments. The course is short, requiring only two weeks. Of this, about 40 hr. are spent in the air. Trainees are first con-

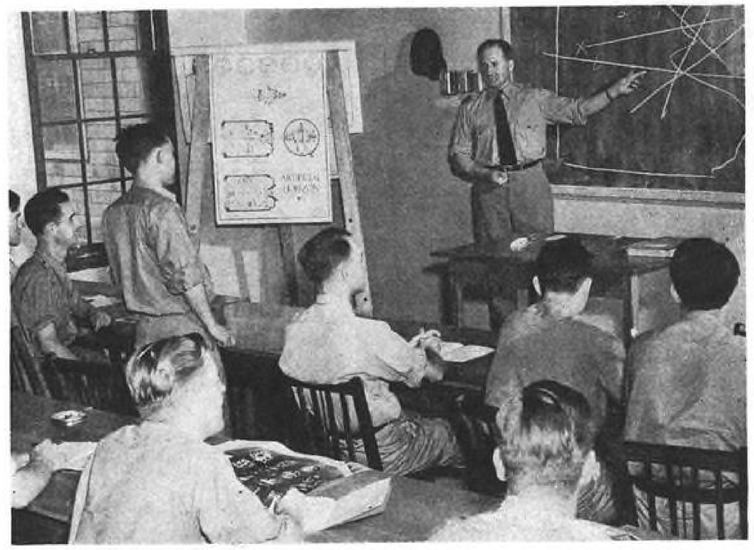

Every phase of flying control is taught at RCAF's new beam-approach school at Deseronto, Ont. Here Squadron Leader J. C. Edwards lectures a class on interceptor control. (All RCAF photos)



Link training is an important part of Canada's instrument flight training school, under which all pilots in Commonwealth Training Program get every available aid in learning to fly safely through any kind of weather they may meet in actual operations. Link trainer instructors and maintenance men, as well as pilots, are trained at new school.

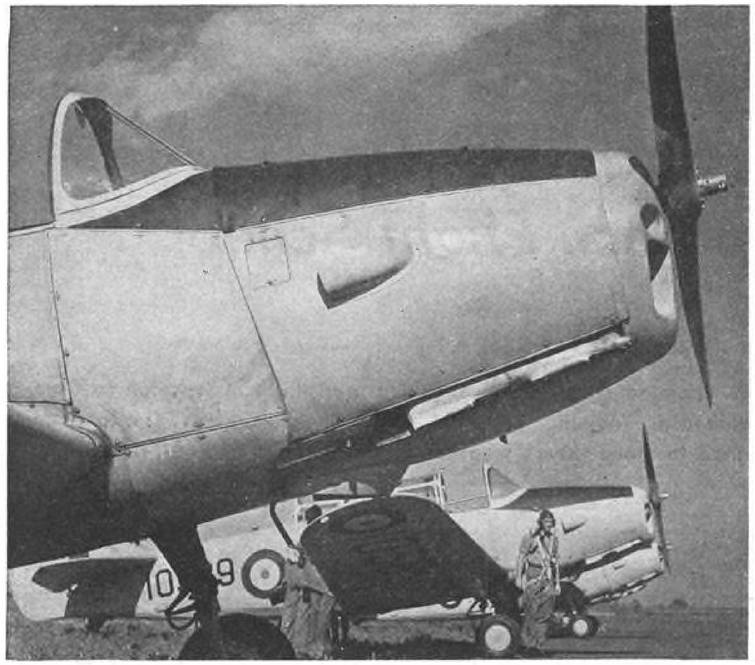

Men achieving high standings in training as Link instructors are given actual flight training up to solo stage in Fairchild Cornells, here shown on line at No. 1 RCAF Instrument Flying Training School.

verted to flying the twin-engine Oxfords used at Deseronto. Then they take a few hours of instrument flying as a refresher.

Flying by day "on the beam" and practising the proper turns for the "let down" are the next steps. During this period the students are actually flying blind, with a canvas hood shutting out landmarks on the pupil's side of the aircraft. The instructor's side is left clear to forestall mid-air crashes. Next they do night flying by instruments, one of the most important phases of the course.

Here is how the beam approach system works: At the end of the longest runway at Deseronto is a transmitter throwing a long narrow high-frequency radio beam which slants upwards. Only 1½ deg. wide, it has a range of about 100 mi. at 4,000 ft. When the pilot is squarely on the "front beam" (as it is termed when the heading is into the home station) he hears a steady monotone through his earphones. If he swings off course to the left, he hears a series of dots. If he swings off to the right, he hears dashes. On the instrument panel is a visual indicator which gives his eyes the same information as his ears receive through the earphones.

Cruising at 600 ft. on the beam, he receives a distinctive signal when crossing the "outer beacon", a vertical cone of radio rays which intersect the directional beam 2 mi. from the end of the home runway. He begins to descend at a standard rate to cross the "inner beam" at 100 ft.. Here he levels off and approaches the runway in the correct position for landing. The beam brings him down within 50 (or even 25 ft.) of the runway.

With the beam approach equipment, pilots will tackle landings when they have only 100-yd. visibility and 50-ft. ceiling conditions, which would be foolhardy to anyone flying contact. Learning the correct technique in making the proper turns and calculations, the flyers must be drilled in the procedure until they are letter perfect. They also must be well-versed in reading instrument, for they have nothing else to guide them in judging where they are or how high they are from the ground.


The beam approach equipment has played an important part in bringing home the bombers from the big raids over Europe, day and night, in good weather and bad. And just as important in take-offs has been the training given bomber and fighter pilots in Link trainers. As chief Link instructor, Squadron Leader J. C. Edwards, who has seen service at British and African operational stations, explains:

"Pilots must know perfect procedure in taking off and landing on the big bombing raids, and it is the Link trainer which constantly brushes them up. Can you imagine what would happen with 1,000 bombers landing or taking off in a period of 45 min.—unless we had perfect procedure ingrained in our pilots by means of Link training? Chaos would result."

That is why a "good Link instructor is worth his weight in gold on an operational station," the RCAF points out. And at the Deseronto school Link instructors are turned out to take posts at other training stations throughout Canada. The Link trainer follows RCAF pilots from their first few weeks in uniform throughout their service careers. They take Link training at the manning depots and in between bombing raids at operational stations. No pilot is ever so good that he can avoid sharpening his skill on the Link.

At Deseronto, Link instructor students need not be able to fly service aircraft, although there are numerous students who flew in World War I. In the first two weeks of the course, embryo Link instructors learn elementary subjects, such

(*Turn to page* 276)

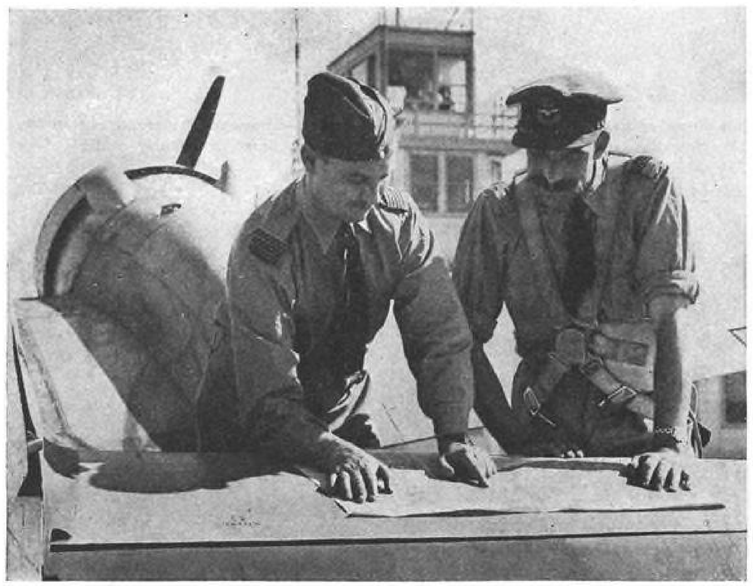

Wing Comdr. E. F. MacDonald (left), Deseronto's commanding officer, with Squadron Leader H. Gibson, chief flight instructor, maps a training flight for instrument school's student pilots, who learn both theoretical and practical aspects of instrument flying.

China and U. S. Chip In For New High In Cooperation



Ever-growing Sino-American cooperation is typified by pilot members of composite wing of Chinese Air Force, shown here being briefed before bombing mission. Wing consists of selected personnel of U. S. 14th Air Force and pilots of Chinese Air Force who were trained in U. S. and have seen service against Japs. (Photos by CNS, Paul Guillumette)




Co-commanders of bomber group of Chinese-American composite wing are Maj. Lee Hsueh-Yuen and Col. Irving Branch. Wing is commanded by Maj. Gen. Claire L. Chennault and is equipped with hard-hitting B-25's and late-model P-40's.



Chinese and American mechanics comprise ground crews of composite wing. Here, American and Chinese field men work together on maintenance problem. Language differences have been quickly overcome, hence have been no barrier to efficient maintenance.



At base somewhere in China, fighter group pilots of composite wing "scramble" for their P-40's at signal for another dual-nationality mission against the Japs.

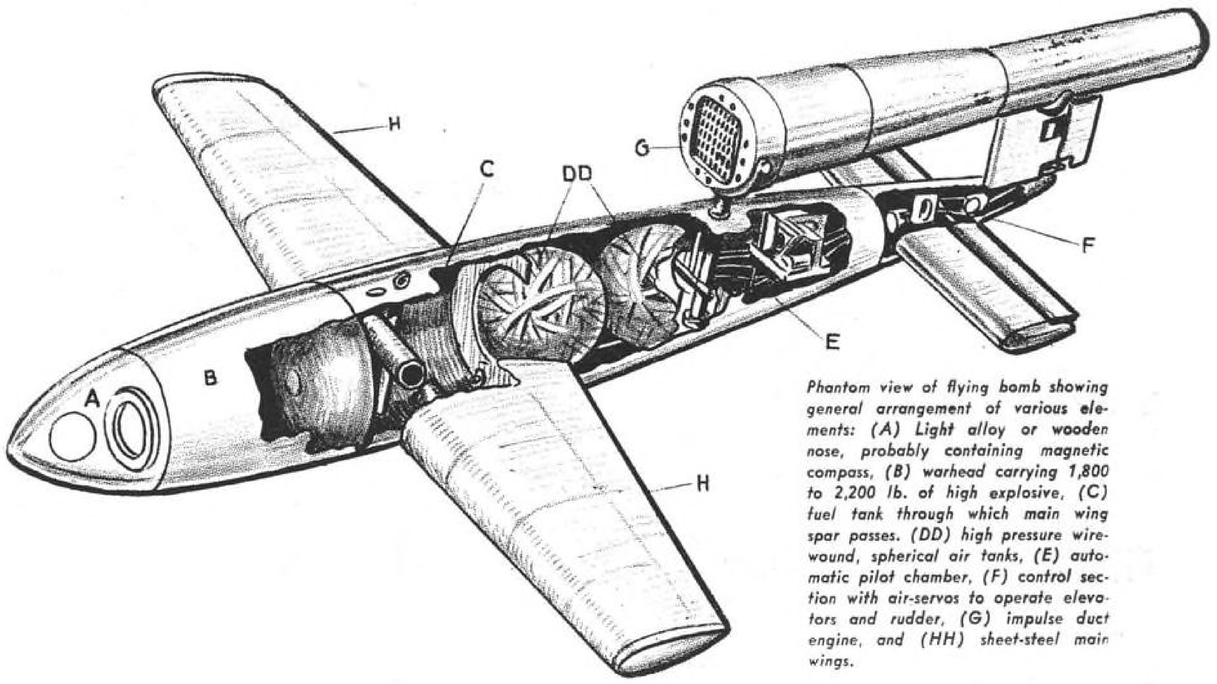

Phantom view of flying bomb showing general arrangement of various elements: (A) Light alloy or wooden nose, probably containing magnetic compass, (B) warhead carrying 1,800 to 2,200 lb. of high explosive, (C) fuel tank through which main wing spar passes. (DD) high pressure wire-wound, spherical air tanks, (E) automatic pilot chamber, (F) control section with air-servos to operate elevators and rudder, (G) impulse duct engine, and (HH) sheet-steel main wings.

Design and Construction Of Nazi V-1 Flying Bomb

By CHESTER S. RICKER, *Detroit Editor, "Aviation"*

Presenting heretofore unrevealed details of one of this war's most destructive weapons—what it is and how it works.


WITH SKETCHES BY THE AUTHOR

SIX DAYS after the Allies had invaded Normandy, the first flying bomb hit England—to introduce one of the most destructive single weapons of the war. And subsequent capture of the so-called rocket coast did not stop them.

Although a war weapon, the V-1 bomb is of even broader interest to aviation men because of the all-steel construction, robot controls, and impulse motor.

Examination of parts and a full-scale model of V-1 disclose many interesting structural details and indicate quite clearly the probable method of the control and the operation of the engine. However, as far as possible deductions of this correspondent will be carefully indicated.

Aerodynamically the robot bomb is an all-steel mid-wing type monoplane with an impulse duct engine mounted about 30 in. above the fuselage. The use of sheet steel unquestionably adds to the ease and rapidity of fabrication and also reduces the cost.

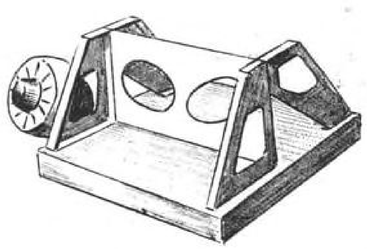

Pressed steel frame in which two air driven gyros are mounted. At left end is adjustable dial graduated, apparently in meters. This probably is used for setting maximum flight elevation.

The complete V-1 unit may be roughly divided into eight major sections: The nose, warhead or high explosive carrier, wing and gas tank, compressed air chamber, automatic pilot, its compartment, empennage unit with air-servo controls, and the impulse duct engine.

According to various press reports, the nose is made of wood or a non-magnetic alloy so as to accommodate a magnetic compass. Since the rest of the structure is all-steel a compass could not be used inside it. There are also reports that a radio device is contained in the nose. This might be used to establish the position of the bomb when it starts its final dive, and radiosonde such as used in meterological balloons could easily be adapted for that purpose. It is, as a matter of fact, difficult to understand why the bombs are not radio controlled, for the extra weight apparently would be no handicap. Perhaps it is because the British counteract the radio control.

Probing of grill suggested this concept of valve mechanism. Reed valves (R), similar to those used in a harmonica, are arranged on back of each grill section, probably riveted or welded to grill section (G). When open they allow air to flow in, as shown by arrows. Valve seats are probably connected by bridge (B), and fuel jets may be located here also so that fuel is fed only when valves are open.


Apparently the Nazis equip the bomb with a dry-battery-powered electric system for ignition purposes and for direction control, since there are wire connections on the automatic pilot unit. If there is a pilot compass in the nose, it would probably be connected by wires to the rudder or azimuth controlling gyro. On the bomb studied there was no connection between the automatic pilot and the rudder, since the latter had been torn off the fuselage. However, there is a graduated dial on the automatic pilot. It is not graduated in degrees, but there might have been a control that could be pre-set to determine the heading or course of the bomb after launching.

The space immediately in front of the wing contains the explosive. This section is conical, varying from about 24-in. dia. at the front to 30 in. at the rear end. It is about 4 ft. long, and in it go 1,880 lb. of high explosive.


The third section is most interesting because the fuel tank and wing are built together as an integral structure. The fuel tank is cylindrical, of about 32 in. dia. and 44 in. long. The main wing spar passes through it, as does the lifting tube which is attached at the bottom to the launching shoe, and there is provided a detachable lifting eye at the top. This is apparently close to the center of gravity of the unit as well as to the center of lift of the wing.


Since the 130-gal. (probably Imp. gal., equivalent to 162.5 U. S.) fuel tank is also located at this same point, the balance of the bomb should not be affected as

(*Turn to page* 289)

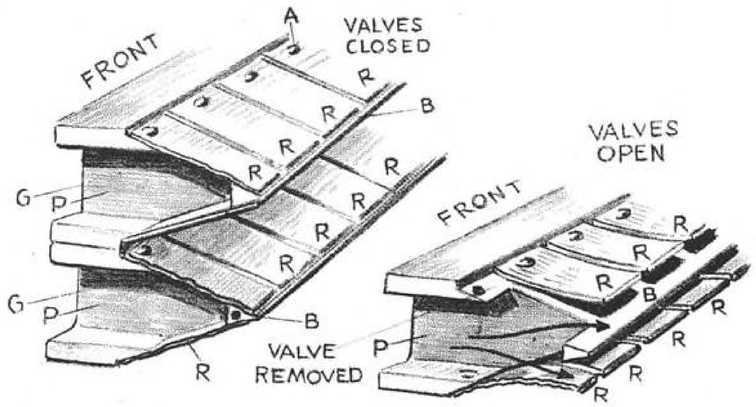


Below: Sheet-steel wing structure. No ailerons are provided. Wing tip is welded to end. Pressed steel ribs are apparently welded to tubular spar extending from tip to tip. Spar is seamless tube from end to end with lugs for welding to wing tip at each end. Center section has strip of steel rolled around tube and spotwelded in place. Bands are welded at rib attachment points.

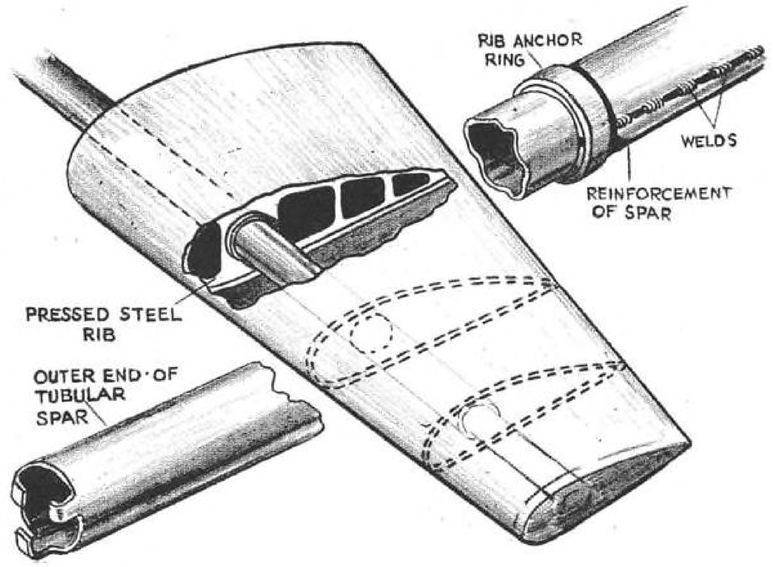

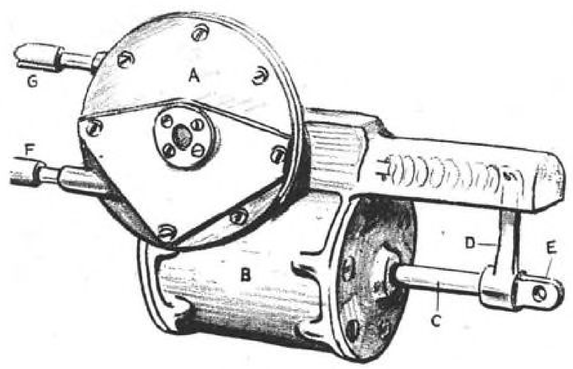

Left: Sketch shows arrangement of valve controlling diaphragm (A) on side of air-servo cylinder (B). Piston rod (C) is connected to an arm (D), which in turn is connected to piston valve by spring. End (E) of piston rod operates elevator or rudder. Tubes (F) and (G) connect diaphragm to automatic-pilot gyro. Below: Cross-section view gives author's conception of impulse tube engine. (G) is steel grill in front carrying steel reed valves. (F) on aft side. Combustion chamber is probably at (C). Three venturi passages, V_1, V_2, and V_3 probably are not tubular, but formed by airfoil vanes. Whether they are vertical or horizontal, if used, is not known.



Preview of Coming Airline Financing

By **RAYMOND L. HOADLEY,** *Financial Editor, "Aviation"*

Recent equipment orders by major carriers would indicate some fat stock offerings, but it appears Wall Street will have to look to other fields for new securities. Here's why.

WHEN THREE AIRLINES recently signed contracts to purchase $50,000,000 worth of Douglas transports, Wall Street immediately figured that a major bit of financing would soon be coming its way. And stockholders, too, may have presumed that large capital stock issues would be floated according to past custom.

But actually the airlines won't need to worry about additional funds until the late summer of 1945, maybe not even then if they are willing to use growing cash resources to take care of early deliveries. And when the financing day does come, some of the lines may veer quite sharply from the old accepted pattern for obtaining new funds.

Obviously the airlines are going to need money, since the equipment orders already placed exceed their liquid cash resources. Estimates of postwar capital needs for the industry have been placed as high as $800,000,000—a rather staggering sum for an industry whose aggregate capital structure is not as large as any one of a dozen big industrial corporations. That much money may be needed, but it will only be needed over a period of ten years or so.

Meanwhile there are a number of reasons why airline executives are not rushing to the bankers for additional funds just yet. In the first place, initial deliveries of the Douglas and Lockheed planes they have on order probably will not begin until six or eight months after V-E Day. Moreover, cash is piling up to the extent that some lines could postpone financing even longer if they wish.

The fact is that earnings today are so good that airlines can finance a greater portion of equipment needs out of their treasuries than they thought possible even as recently as six months ago. There was an alarming dip in earnings early this year. Then the lines tightened up on operating costs while traffic mounted as more planes were returned to them by the Army.

United Air Lines, for example, disclosed net income of 50c. a share in the month of July alone, thus earning the company's entire 1944 dividend in that 31-day period. Other lines, showing quite similar gains, are plowing these profits back into the business in the form of liquid assets.

The result of these accumulating earnings, plus conservative dividend policies, is that some of the lines are changing their thinking on future financing methods. Present prospects are that there will be fewer stock issues floated, more reliance on bank credit, and not as much use as might be expected of the equipment trust method so successfully employed by the nation's railroads for many years.



Here is the situation as it seems to be shaping up at this early date for the "Big Four" domestic airlines:

American Airlines officials point out that up to 70 percent of the line's $30,000,000 present commitment for Douglas DC-4 and DC-6 transports could be financed by cash if the company so elected. But when deliveries really get under way late in 1945, American probably will finance a substantial part of the purchase through bank credits or possibly through equipment trust certificates. The planes would be written off in depreciation in six years, and the obligation likewise could be repaid out of earnings in about the same length of time.

Eastern Air Lines may choose to pay straight cash for its contemplated purchase of $7,000,000 of transports. Eastern has never paid a dividend, preferring rather to steadily strengthen its finances for future expansion. The result is that Eastern at the end of 1943 had cash items of $16,500,000 and net current assets of more than $13,500,000.


United Air Lines has about $19,000,000 cash in the till today, and its position will be better by the time payment must be made for the $25,000,000 in transports that have been ordered—all due to additional profits that will accrue between now and delivery dates. Last year United sold $10,000,000 of preferred stock to acquire a reserve preparation of postwar development. In the future the company will probably rely on bank loans in the form of chattel mortgages.

TWA officials forecast that the company's capital requirements by 1954 for domestic operations will total around $100,000,000. The company has turned to bank loans to finance plane acquisitions, and it is expected that this method will be employed in the future, since some of the company officials are known to be opposed to the use of equipment trusts.

Thus it appears that the major lines may favor direct bank loans when the time comes to raise money. In fact, a large number of banks already have indicated their willingness to make such loans for equipment purchases. And the reason for this new interest in airline loans on the part of bankers stems from the excellent credit rating their strong cash position has given them. It is known that some banks are willing to provide credit for 75 percent of equipment cost, an amount that can be easily handled by the airlines through depreciation charges.

This is a far-cry from the situation in prewar days when bankers turned their backs on American Airlines' efforts to finance its first fleet of DC-3's, the line

(*Turn to page* 296)

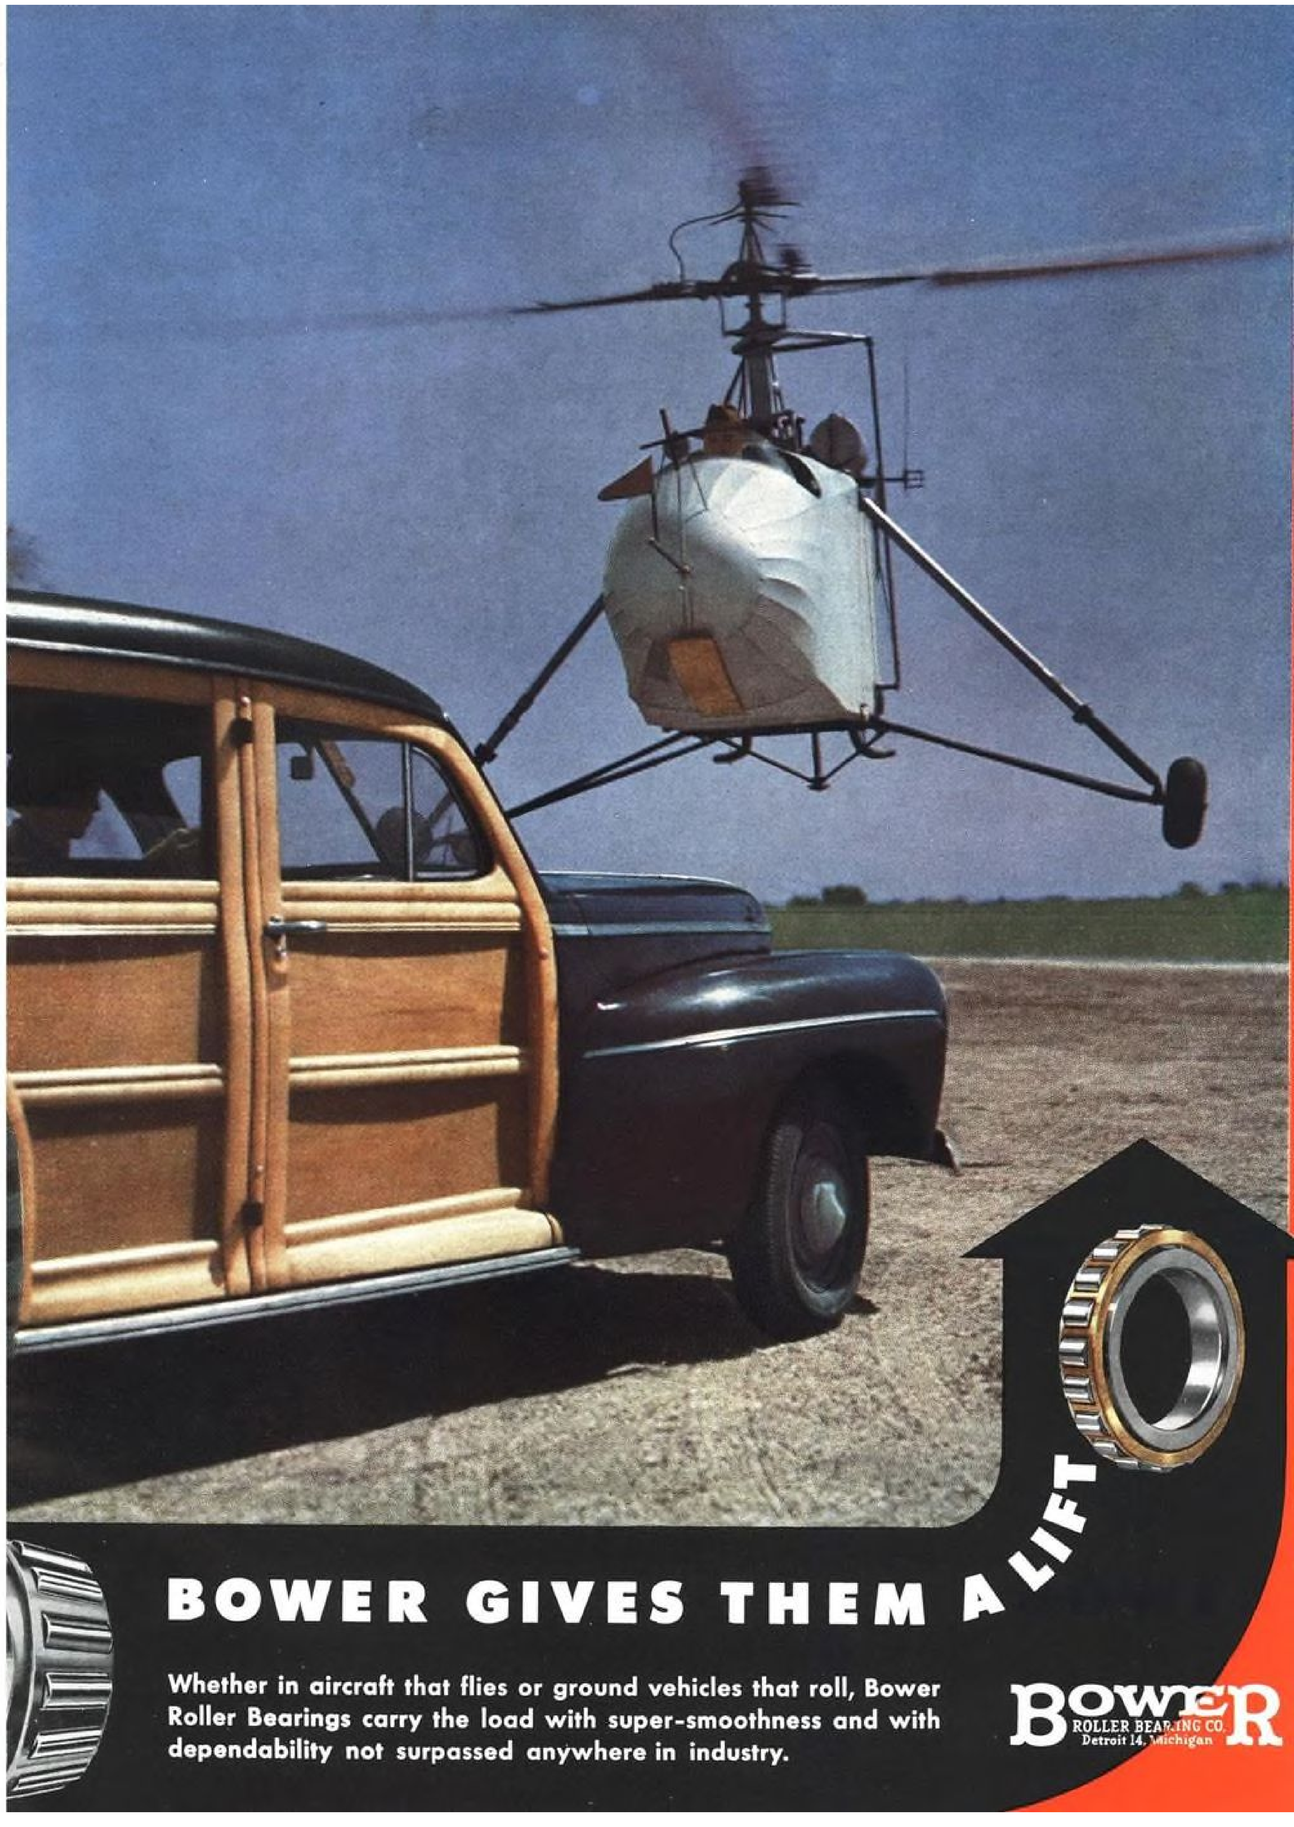



"We should like to express to you our complete satisfaction with the performance of Champion Spark Plugs . . . we were able to obtain the remarkable service of 100 hours between changes . . . they required at least 50% less time to service for re-installation, since they could be cleaned and re-gapped without dismantling and with the simplest of maintenance equipment." *Excerpts from a letter from JOHN E. KEVARI, Superintendent of Maintenance, Southwest Airways Cargo Division.*

OVER 1,000,000 MILES OF FEEDER LINE OPERATION!

Southwest Airways Cargo Division inaugurated an exclusive feeder line service for the ATC just 21 months ago. Its outstanding success, unmarred by accident, and with the safe and speedy delivery of over 2,000,000 pound cargo proves conclusively and dramatically the practicality of true feeder line service.

In this operation Southwest Airways are deserving of credit as genuine pioneers. They have foreshadowed by a million miles plus, the type of short haul operations that will inevitably link thousands of the nation's small towns into a vast network of speedy and sure transportation.

The "ups and downs" of this service, over 2600 route miles per day, totalled 28,000 landings and take offs. Loads consisting of war materials with high priorities, military freight and mail demanded the utmost in dependable service at all times. Champion-Ceramic Spark Plugs played their vital part with conspicuous success as attested to by the above excerpts.



DEPENDABLE

CHAMPION SPARK PLUGS

CHAMPION SPARK PLUG COMPANY, TOLEDO 1, OHIO

INSTALL CHAMPIONS AND FLY WITH CONFIDENCE

AVIATION'S *New Regular Feature*

FOR *Better Design*

NOVEL LIGHTWEIGHT JUNCTION BOX COMBINES ACCESSIBILITY AND VISIBILITY

A PLASTIC ELECTRIC JUNCTION box, developed by Harry Cramer, Martin engineer, is considerably lighter and affords greater ease of inspection and maintenance than standard metal boxes.


Design of the new box provides for either a metal or laminated plastic flat base (depending on whether or not ground studs are needed in the assembly) as the main section to which installations and wiring are attached. The molded cover of transparent plastic, developed by W. A. Safka, Martin plastics engineer, requires only a single, low-cost cavity mold; forming is done with air from flat sheet heated to 380 deg. F.

With the conventional type box, installations are made in the box proper and are less accessible during assembly and maintenance than with the new unobstructed flat surface.

Another improvement of the new design is the reproduction, by photographic process, of the wiring diagram on the sensitized base plate. This not only simplifies drilling, assembly, and wiring of the units during manufacture, but also provides a permanent record for use of maintenance personnel in the field.

The transparency of the cover adds to the man-hour savings during manufacture and in the field. For example, with the metal box now in use in the center wing section of the PBM-3 *Mariner*, it is necessary to remove and replace the cover as much as 23 times for visual inspection between original installation and airplane ground test. This operation is repeated numerous times in the field—but with the transparent cover it can be eliminated.

Weight savings with the new box are considerable, ranging as high as 33 percent per unit, depending on type of box and material from which the base is made. Whereas the design is presently intended only for the radio direction-finder junction box, it is equally applicable to other junction boxes in the plane. In aircraft similar to the PBM-3 *Mariner*, which uses approximately 100 boxes in its various electrical systems, this would result in a net weight saving of 35-40 lb., as well as reduction in material and manufacturing costs.

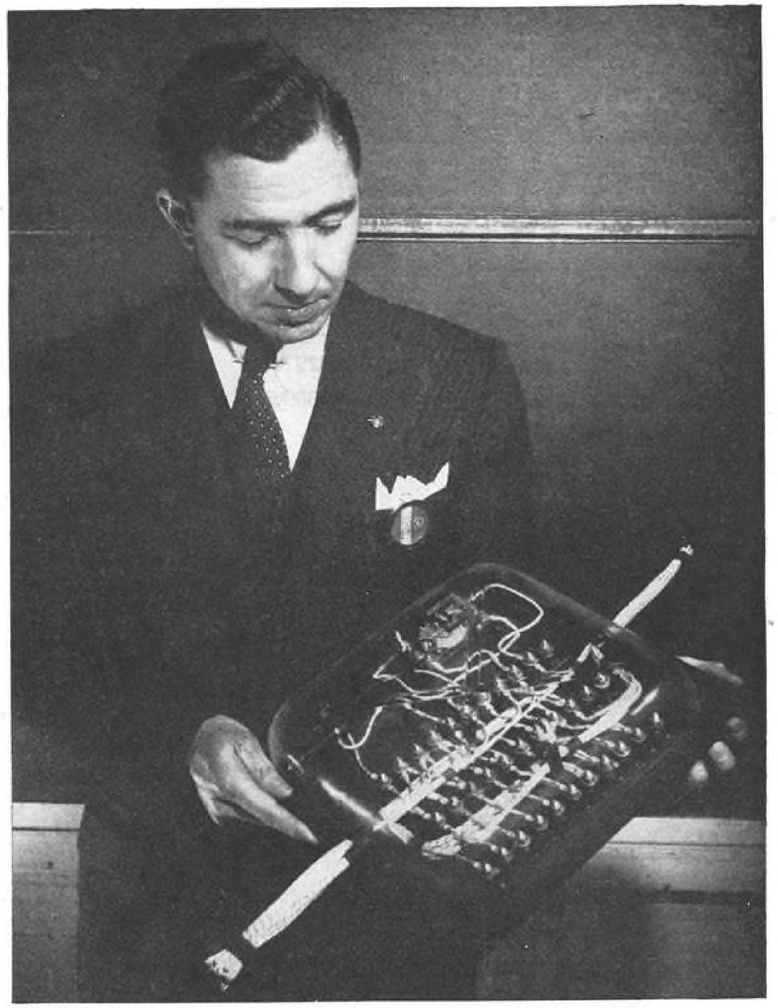

New lightweight plastic junction box. It was developed by Harry Cramer, Martin engineer, who is seen here displaying unit decked with transparent cover developed by W. A. Safka, another Martin engineer. Wiring hook-up, photographically reproduced on sensitized base plate, simplifies drilling, assembly and wiring during manufacture, also provides permanent record for field service personnel. Unobstructed flat base surface affords ready accessibility during assembly and maintenance.

TRU-LOC *Aircraft* TERMINALS

DATA FOR *Aircraft* CONTROL CABLES

Micro PUSH-PULL CONTROLS

THE PROBLEMS OF ROTARY SWAGING

DATA FILE

Aircraft

CABLE
CONTROL
FITTINGS
SLINGS

American Chain & Cable Company, Inc.
AUTOMOTIVE & AIRCRAFT DIVISION
6-235 GENERAL MOTORS BLDG., DETROIT, MICHIGAN — 610 THIRD STREET, SAN FRANCISCO, CALIFORNIA

COMPLETE
***and* UP-TO-DATE**

● **Information.** Clear—compact—tabulated wherever possible—conveniently arranged for anyone whose job is to buy or specify aircraft controls. And, just to make the story complete, the file includes a booklet that gives you the inside facts about rotary swaging. ● This DATA FILE is offered by the company that originated Swaged Aircraft Terminals—in fact, originated and produced the first corrosion-resisting preformed Aircraft Cable. The plus value of this longer experience is what you get when you buy or specify TRU-LOC Swaged Fittings. This DATA FILE makes it easier to specify them. If your file is not complete and up-to-date, write the Detroit office.

AUTOMOTIVE AND AIRCRAFT DIVISION
6-235 General Motors Building • Detroit 2, Michigan

AMERICAN CHAIN & CABLE COMPANY, Inc.
BRIDGEPORT • CONNECTICUT

ESSENTIAL PRODUCTS • TRU-LAY Aircraft, Automotive, and Industrial Controls • TRU-LOC Aircraft Terminals • AMERICAN CABLE Wire Rope • TRU-STOP Brakes • AMERICAN Chain • WEED Tire Chains • ACCO Malleable Castings • CAMPBELL Cutting Machines • FORD Hoists, Trolleys • HAZARD Wire Rope • MANLEY Auto Service Equipment • MARYLAND Bolts and Nuts • OWEN Springs • PAGE Fence, Shaped Wire, Welding Wire • READING-PRATT & CADY Valves • READING Steel Castings • WRIGHT Hoists, Cranes • WILSON "Rockwell" Hardness Testers

In Business for Your Safety

FAIRLEAD INNOVATIONS
GIVE BETTER-THAN-FAIR UTILITY

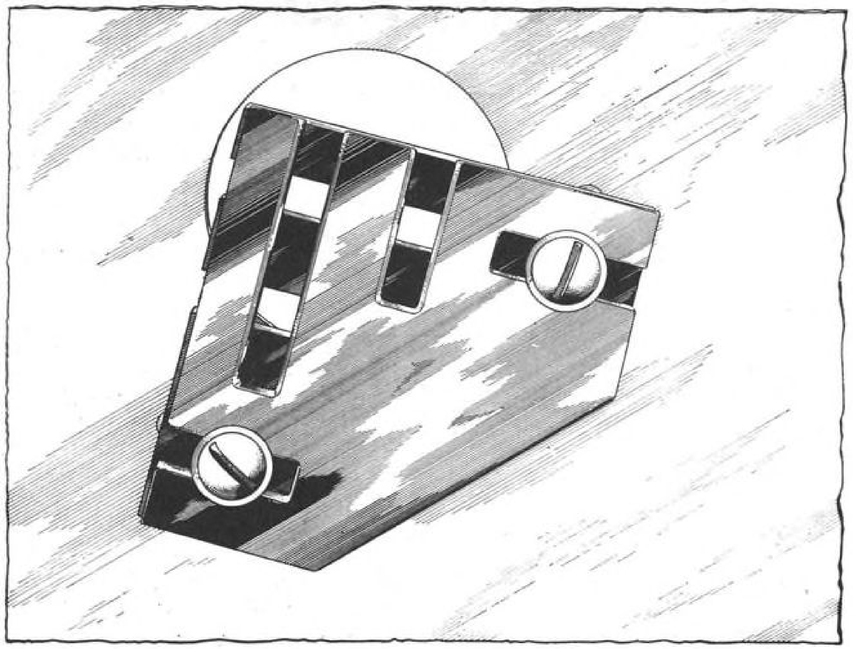


Fig. 1. Shown here is adjustable type fairlead for control cables, designed at Curtiss-Wright Airplane Div., St. Louis. Each block of assembly has parallel guide slots perpendicular to similar slots in other block to form criss-cross pattern of openings for cable run. Adjustable mounting, consisting of perpendicularly opposed anchor slots and screws, allows for radial adjustment to compensate for slight misalignment when cable fails to conform exactly to predetermined centerline location, and friction is thus reduced.

TWO INGENIOUS AND EFFICIENT fairleads for aircraft control cables have been brought out at the Curtiss-Wright Airplane Div., St. Louis. One of these fairleads is an adjustable type; the other is a swivel type. Each has special features and range of uses, and both are simple in design, offering rapid adaption to cable conditions.

The adjustable fairlead (Fig. 1), designed by W. M. Scarborough of the engineering department, consists of twin blocks secured in superimposed relation on a bulkhead or other structural portion of the plane. The blocks, of 3/16-in. phenolic material or other suitable composition, are pentagonal—each having the form of a small square with an equilateral corner cutout. Each is provided with a pair of parallel cable guide slots, opening on the same side of the block and perpendicular to the guide slots of the other block, thus forming a criss-cross pattern of openings for running the cables.

The mounting of the assembly is rendered adjustable by perpendicularly opposed anchor slots on the respective blocks, affording radial movement with respect to predetermined cable centerline location —an advantageous feature, since cable installations frequently fail to conform exactly to given centerlines. Friction may thus be reduced to a minimum on long cable spans incorporating many fairleads.

The fairlead is installed by slipping one of the blocks over the cable, then slipping on the other block with the opposing guide slots to confine the cable in an opening of the criss-cross pattern.

Screws inserted in the opposing anchor slots secure the fairlead to the supporting surface, and serrated washers are used between the blocks to provide against vibrational displacement. Prior to tightening the screws, the blocks are moved until the bounding walls of the guide slot assume a position free from contact with the cable.

Motion of one block is always at right angles to the motion of the other. Thus the location of cable apertures may be varied over the area of the aperture in the bulkhead merely by linear movement of the blocks.


A novel swivel type fairlead (Fig. 2), designed by T. S. Lindabury, also of the engineering department, provides an effective restraining means for control cables and is particularly adapted to facilitate their rapid installation or removal.

This fairlead is a one-piece composition block molded in the form of a reel device with two horizontal arms. One of the arms is slotted for cable guidance and allows sufficient freedom of cable motion to minimize rubbing; the other arm is forwardly spaced and serves as a slot closure, restraining the cable normal to its length, to prevent escape.

It is unnecessary to remove the fairlead from its support when stringing a cable. The block is pivotally mounted on a pair of bearings carried on brackets secured to the supporting surface, and the swivel arrangement permits the slotted guide arm to be moved out of the zone of the cable so that large cable fittings may pass through the substantially larger rectangular opening between the horizontal arms of the block.

Only a simple manual operation is required to adjust the fairlead or remove it from a cable guiding position to one in which the cables are freed. The device is secured in the normal position by a small lockpin carried in an aperture provided in the side portion of the block and

Ever wonder about the anatomy of a Ball Bearing?

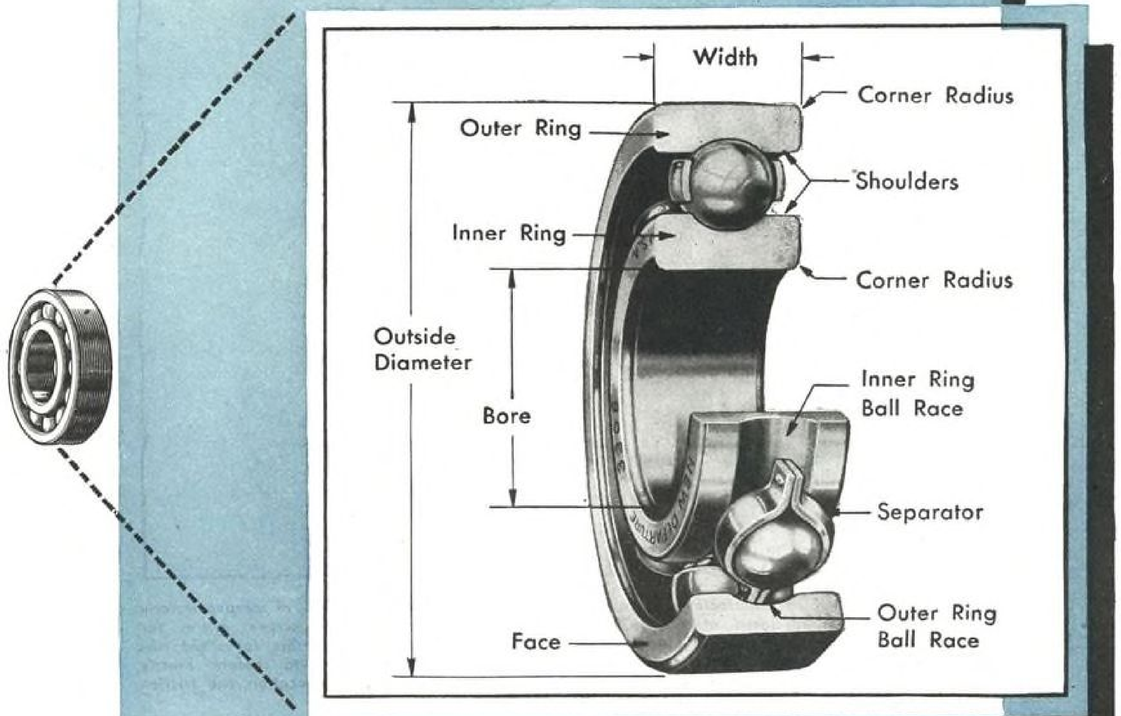

The subject of the Ball Bearing is on everyone's lips nowadays, because of its immense importance to the prosecution of the war.

But how many know what a ball bearing is—what it does—why it is so indispensable?

A ball bearing is not merely a steel ball! It consists of the assembled mechanism illustrated.

It is used wherever shafts turn, to support loads, to permit higher, smoother speeds. Because nothing rolls like a ball, it reduces friction and wear and assures that the precise "location" of machine parts is maintained.

To those who would know more about this "tremendous trifle" we offer free an interesting 112 page book entitled, "Why Anti-Friction Bearings?"

nothing rolls like a ball

NEW DEPARTURE
BALL BEARINGS

NEW DEPARTURE • DIVISION OF GENERAL MOTORS • BRISTOL, CONNECTICUT

Sales Branches: DETROIT, G. M. Bldg., *Trinity 2-4700* • CHICAGO, N. 230 Michigan Ave., *State 5454* • LOS ANGELES, *5035 Gifford Ave., Kimball 7161*

adapted to engage a mating aperture in the bracket. A spring element having one end anchored in the block engages the inner end of the lockpin. A finger loop on the outer end of the spring facilitates retraction of the pin when the block is to be freed for rotation. Upon completion of cable repair or replacement, when the block is rotated to its original position pin snaps into bracket aperture.

Should the cable be installed so as to lie in a direction not perpendicular to the rotational axis of the fairlead, the slots are given an angular set corresponding to the cable angularity.

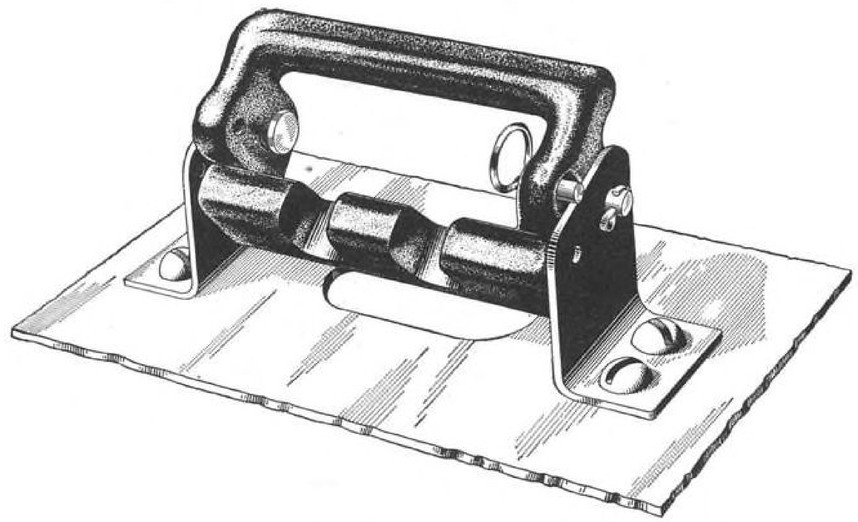


Fig. 2. Swivel type fairlead, also designed at Curtiss-Wright, is shown here positioned abnormally to depict details. Device is one-piece composition block, pivotally supported on bearings, with slotted arm for cable guidance and arm serving as slot closure. Swivel arrangement permits slotted arm to be moved out of cable zone to allow large cable fittings to pass through rectangular opening between arms. Spring-loaded lockpin secures block in cable-guiding position, and assembly is freed for rotation when pin is retracted by finger loop.


WELDING SIMPLIFIES JOINTS

WELDED JOINTS in a simplified design of PBM pilot house frames resulted in trim, watertight enclosures, and helped solve troublesome assembly and procurement problems.

Original riveted frames presented difficulties with shape-holding characteristics after release from jig and during later assembly operations. Many structural members met at one point and required involved attachment details.

Using welded construction, uniformity is maintained in the complete assemblies. Four members meeting at the top corner post joint are neatly welded and crown skin is riveted directly to chord members. More than 60 detail parts are eliminated.


Welded design also provides savings in weight and material, and eliminates pockets which would accumulate corrosive salt water.

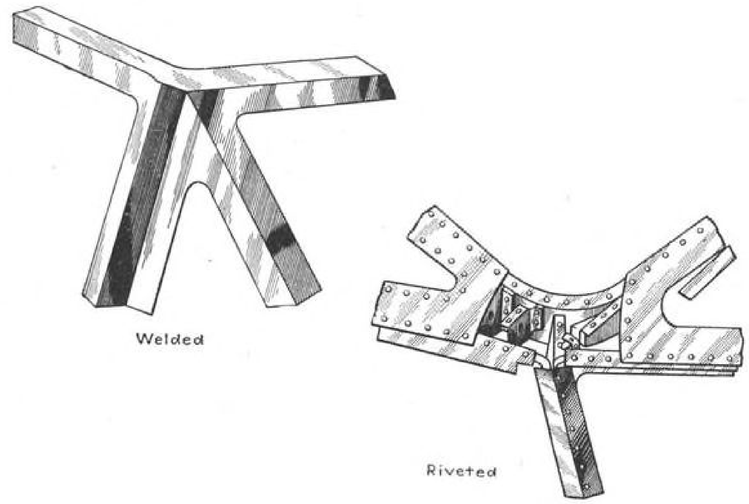

HYDRAULIC POWER

FOR *Lockheed* CONSTELLATION



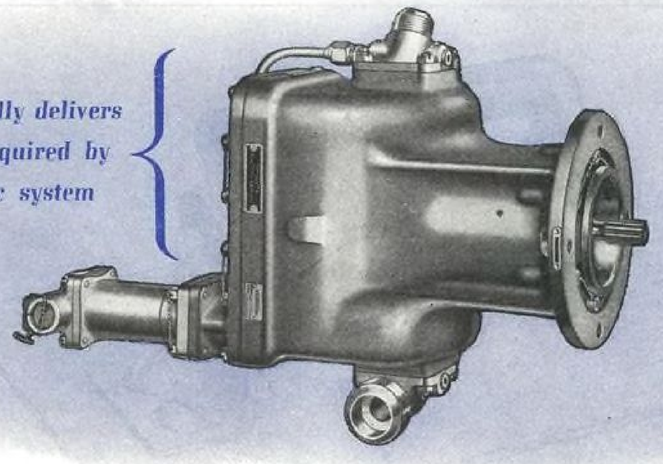


Four engine-driven Vickers Variable Volume Piston Type Pumps supply the hydraulic power for the booster system and the main hydraulic system on the Constellation. An integral part of this pump is a pressure control device that automatically and continuously maintains the desired pressure independent of varying volume demand and of engine speed.

This Vickers Pump automatically delivers the volume of fluid required by the hydraulic system. When the requirement decreases, the stroke of the pistons is shortened; when more volume is needed, the piston stroke is lengthened. Never is an excess of fluid pumped. The pump *maintains* full pressure in the system at all times with very little horsepower. The variable volume pump eliminates the necessity for the conventional accumulator and unloading valve required when a constant volume pump is used. The variable volume pump is recommended when hydraulic power is used continuously during flight . . . as for the flight control booster system.

As shown by performance curves, volumetric efficiency and overall efficiency are very high. Maximum recommended operating pressure is 1700 psi and maximum recommended speed is 2700 rpm. Maximum hydraulic horsepower output is 15.0 hp at 2700 rpm. The range in pressure necessary to cut volume from maximum to zero can be varied to suit requirements. The maximum pressure is readily adjustable.


VICKERS *Incorporated*
1462 OAKMAN BOULEVARD
DETROIT 32, MICHIGAN

Provided by
VICKERS
VARIABLE VOLUME
PISTON TYPE PUMPS

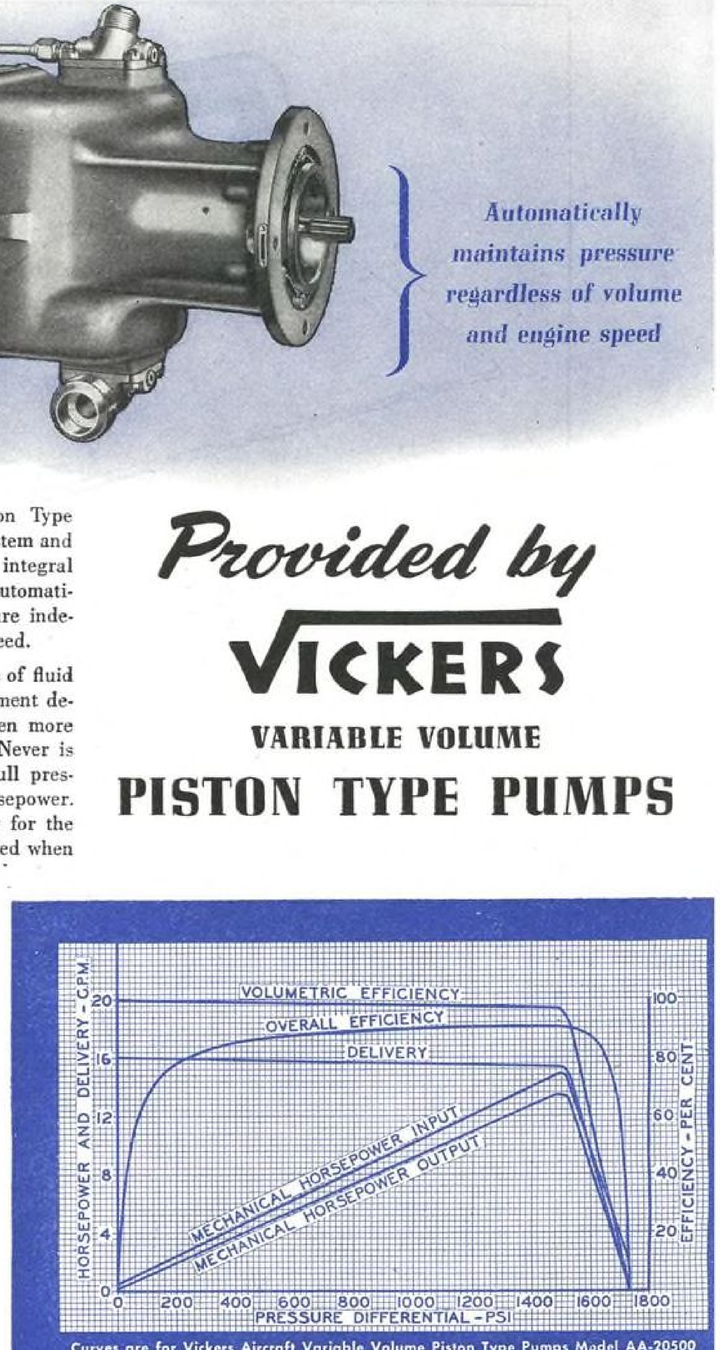


Curves are for Vickers Aircraft Variable Volume Piston Type Pumps Model AA-20500 Series at 2400 *rpm* using approved AN aircraft type hydraulic fluid.

ENGINEERS AND BUILDERS OF OIL HYDRAULIC EQUIPMENT SINCE 1921

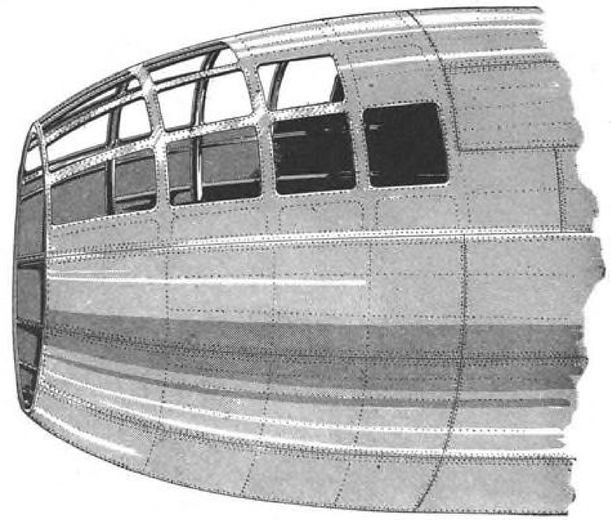

Exterior view of forward part of Boeing B-29 Superfortress, showing method of providing extremely wide range of visibility for pilot, co-pilot, and bombardier. "Cap" of transparent plastic fits onto nose at extreme left. Fuselage here is of conventional bulkhead, stringer, and stressed skin construction.

Interior view, looking aft, in cabin control section of B-29. Foundations for pilot's and co-pilot's seats are at A and B, respectively. Concave bulkhead C (to which center portion C-1 is still to be added) separates this section from unpressurized bomb bays. Bottom part of tunnel through which crew members may crawl from one pressurized section of craft to another over bomb bays is shown at D. Some of pilot's windows can be seen at E.

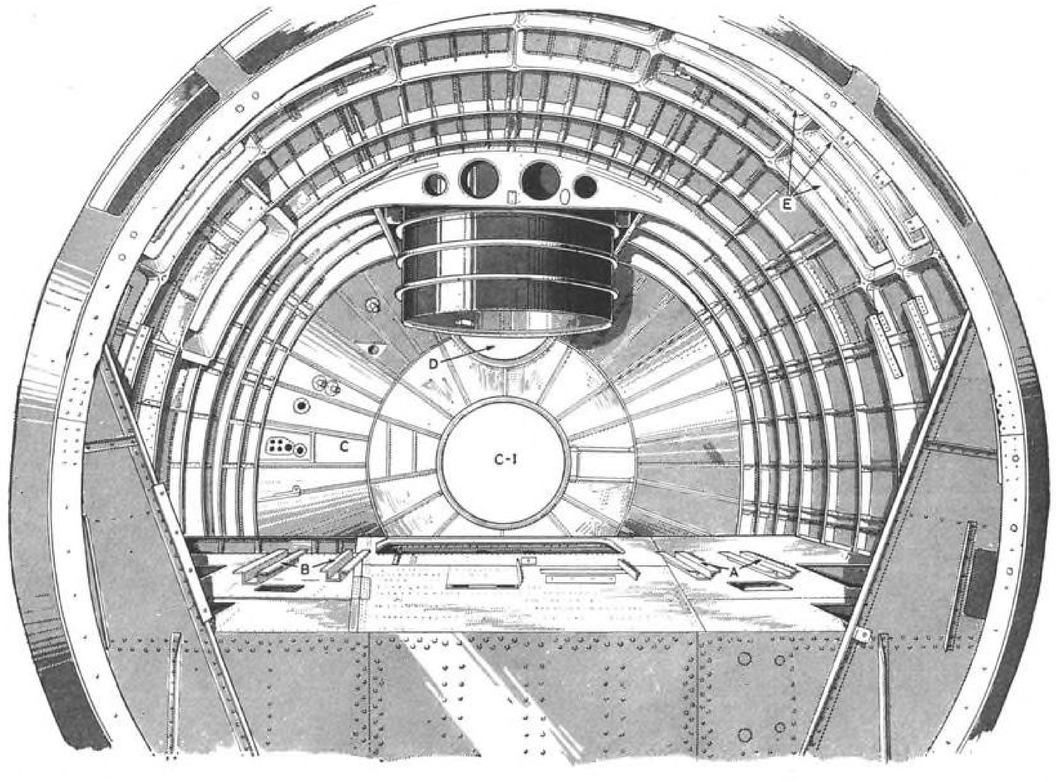





AEROQUIP SELF SEALING COUPLINGS AND HOSE LINES
WITH DETACHABLE FITTINGS ARE STANDARD
ON ALL ARMY AND NAVY AIRCRAFT.

AEROQUIP CORPORATION
JACKSON, MICHIGAN, U. S. A.

303 WAREHAM BLDG., HAGERSTOWN, MD. - 1709 W. 8th., LOS ANGELES - PRENCO—72 STAFFORD ST., TORONTO, ONT.

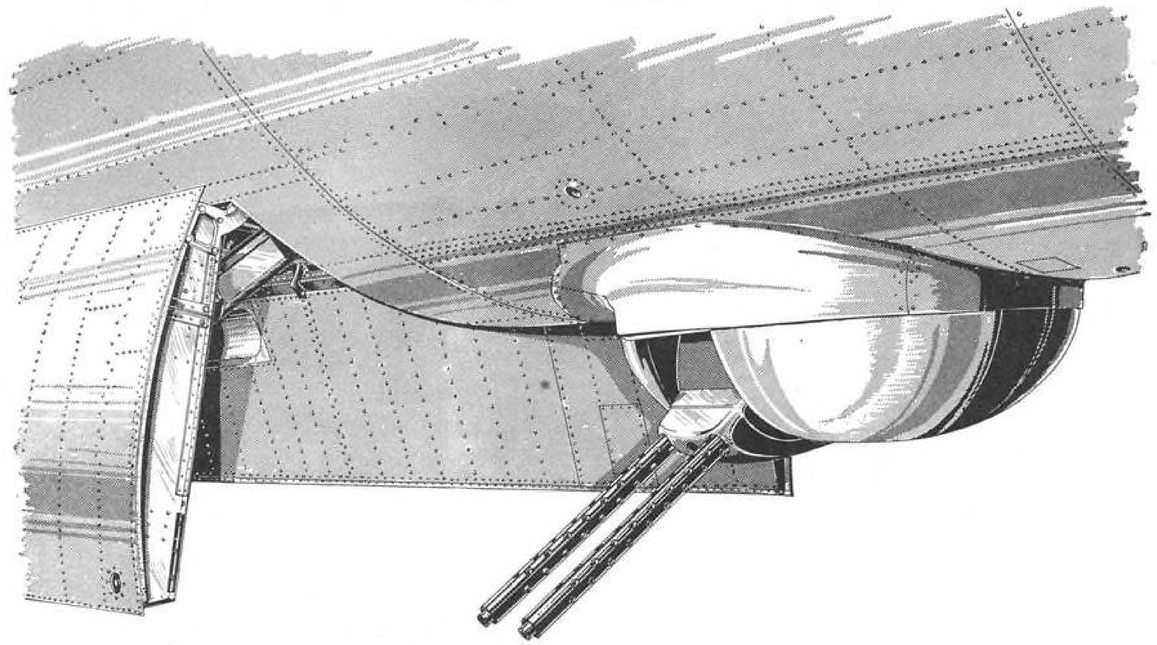


Remote-controlled fore-lower twin-50-cal. machine gun turret of Boeing B-29 Superfortress is located just ahead of forward bomb bay. Wide field of fire of turret is indicated by position of guns, and smooth fairing is shown. Built-up structure of bomb bay doors, as well as actuating lever on right door, can also be seen.

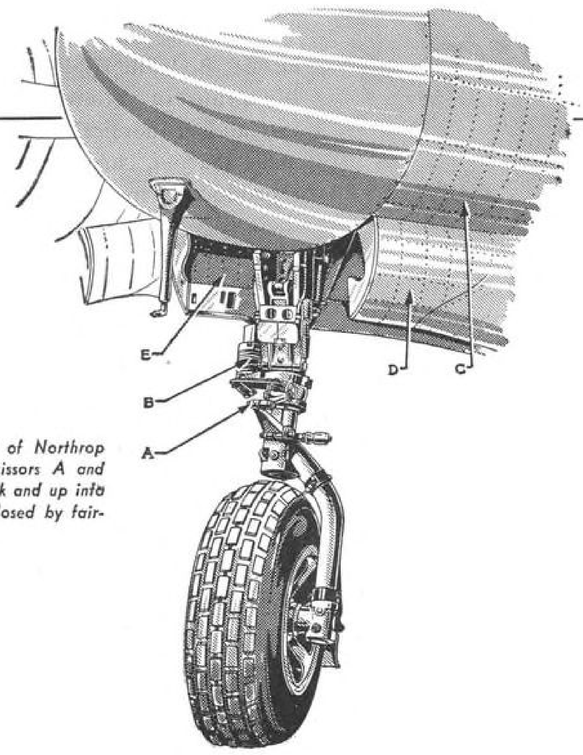

Nose wheel of tricycle landing gear of Northrop P-61 Black Widow, showing torque scissors A and shimmy damper B. Wheel retracts back and up into fuselage C, with the aperture being closed by fairing doors D and E.

PUT YOUR RECONVERSION PLANS IN ACTION QUICKLY

WITH LOW COST *Blueprints*

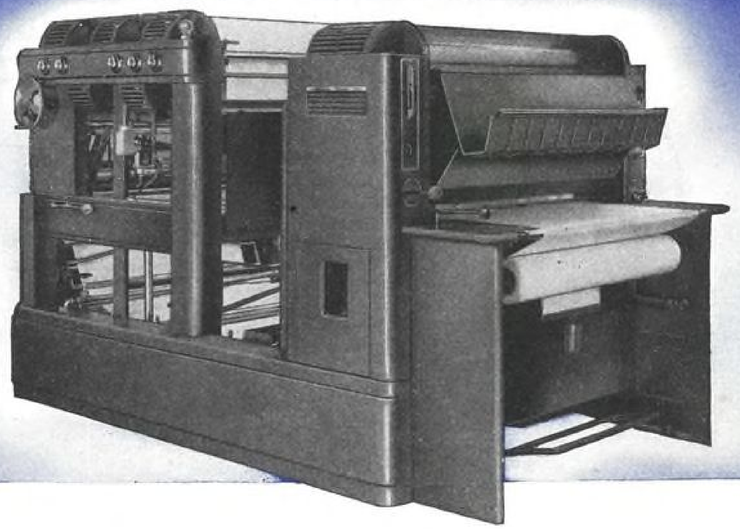

PEASE "22-16" Continuous Blueprinting and Processing (Washing, Developing and Drying) Machine has an actual production speed of 20 feet per minute.







RECONVERSION will not be a mere return to prewar production . . . The use of new materials and new methods will increase the demand for high quality Blueprints delivered quickly at low cost.

PEASE BLUEPRINTING MACHINES will provide these necessary Blueprints in volume and on time. Unparalleled in performance, fast and economical in operation, they require less attention and make sharper, clearer, more contrasty prints than any other tracing reproduction machine. Pease Blueprinting Machines are noted for their speed (Pease "22", not illustrated, produces prints at 30 feet per minute or more) and for their low cost, quality production . . . fine prints as low as one cent (or even less) per square foot.

PEASE SENSITIZED PAPERS, for use with any Blueprinting or Whiteprinting (Dry Direct Process) machines, are uniformly dependable for producing quality Blueprints, Blueline Prints, Brownprints (Negatives), Brownline Prints and Multazo Whiteprints.


Ask for descriptive literature and prices today.


THE C. F. PEASE COMPANY

2611 WEST IRVING PARK ROAD • CHICAGO 18, ILLINOIS


Pease Blueprinting Machines for all kinds of Tracing Reproductions

Pilot's cabin of Landgraf helicapter, showing installation of suction cooling fan A built-in to modified 85-hp. Pobjoy engine B, mounted in pusher position through engine mount C attached to firewall between oil radiators D, just behind pilot's seat E. Pitch control lever F has elbow rest pad aft of handle-bar grip for added leverage and additional feel. Both up and down and twisting motion are imparted to grip. Throttle and spark setting levers H and I are set just ahead of pitch control lever on left side of cabin, and control stick is shown at J. Semi-monocoque cabin is of wood frame covered with 3-ply Oregon pine skin. (Also see Aviation for Oct. 1944, page 186.)

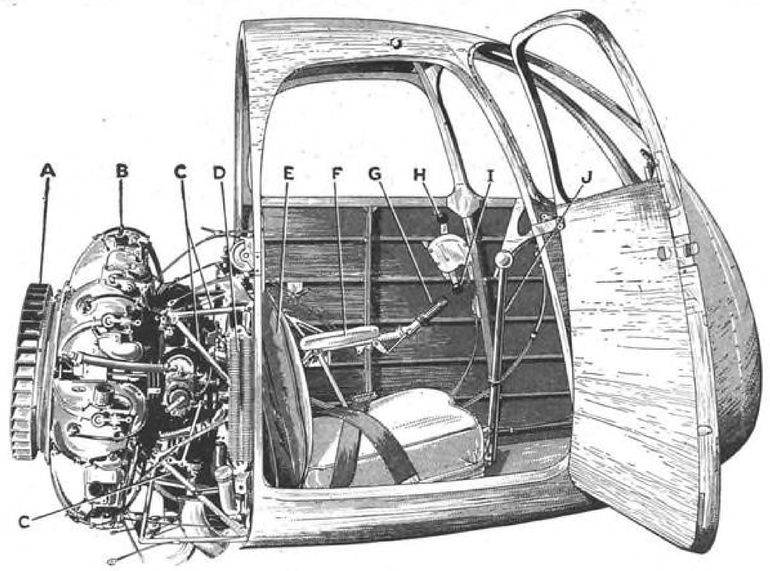

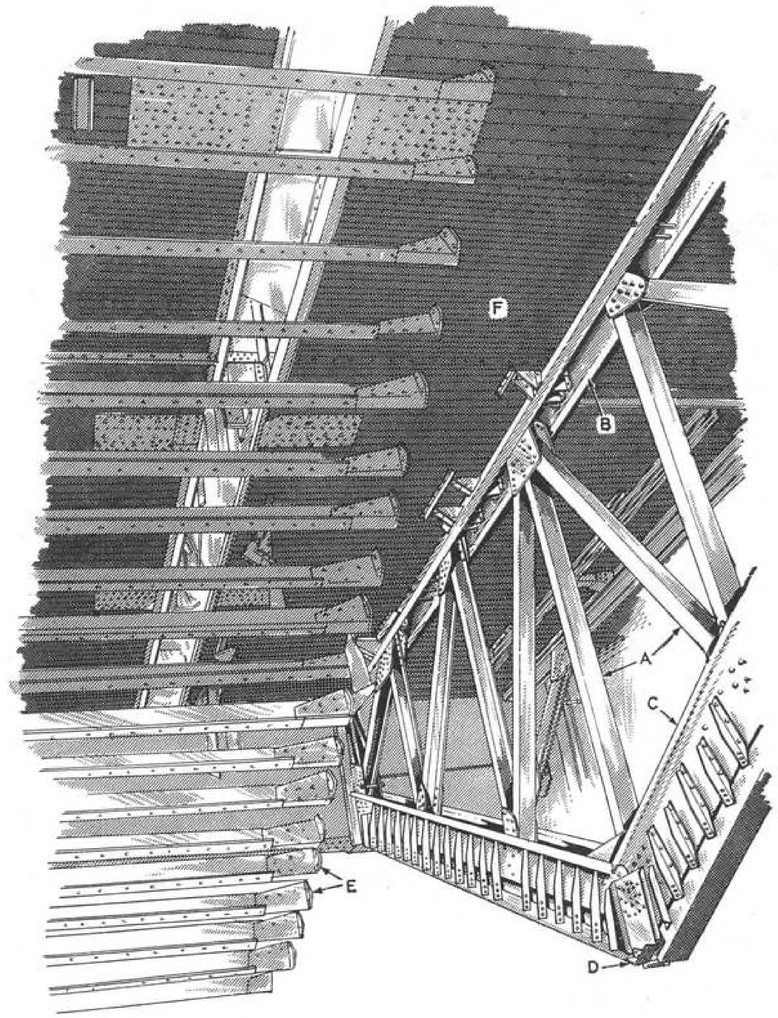

Hull truss members of Boeing 314 Clipper are made up of square tubular vertical and diagonal members, as shown at A, and U-shaped top and bottom members, as at B and C. Keel is attached at D, and hull bottom stringers, with angle plates for attaching to truss, are at E. Bottom of cabin deck is at F.

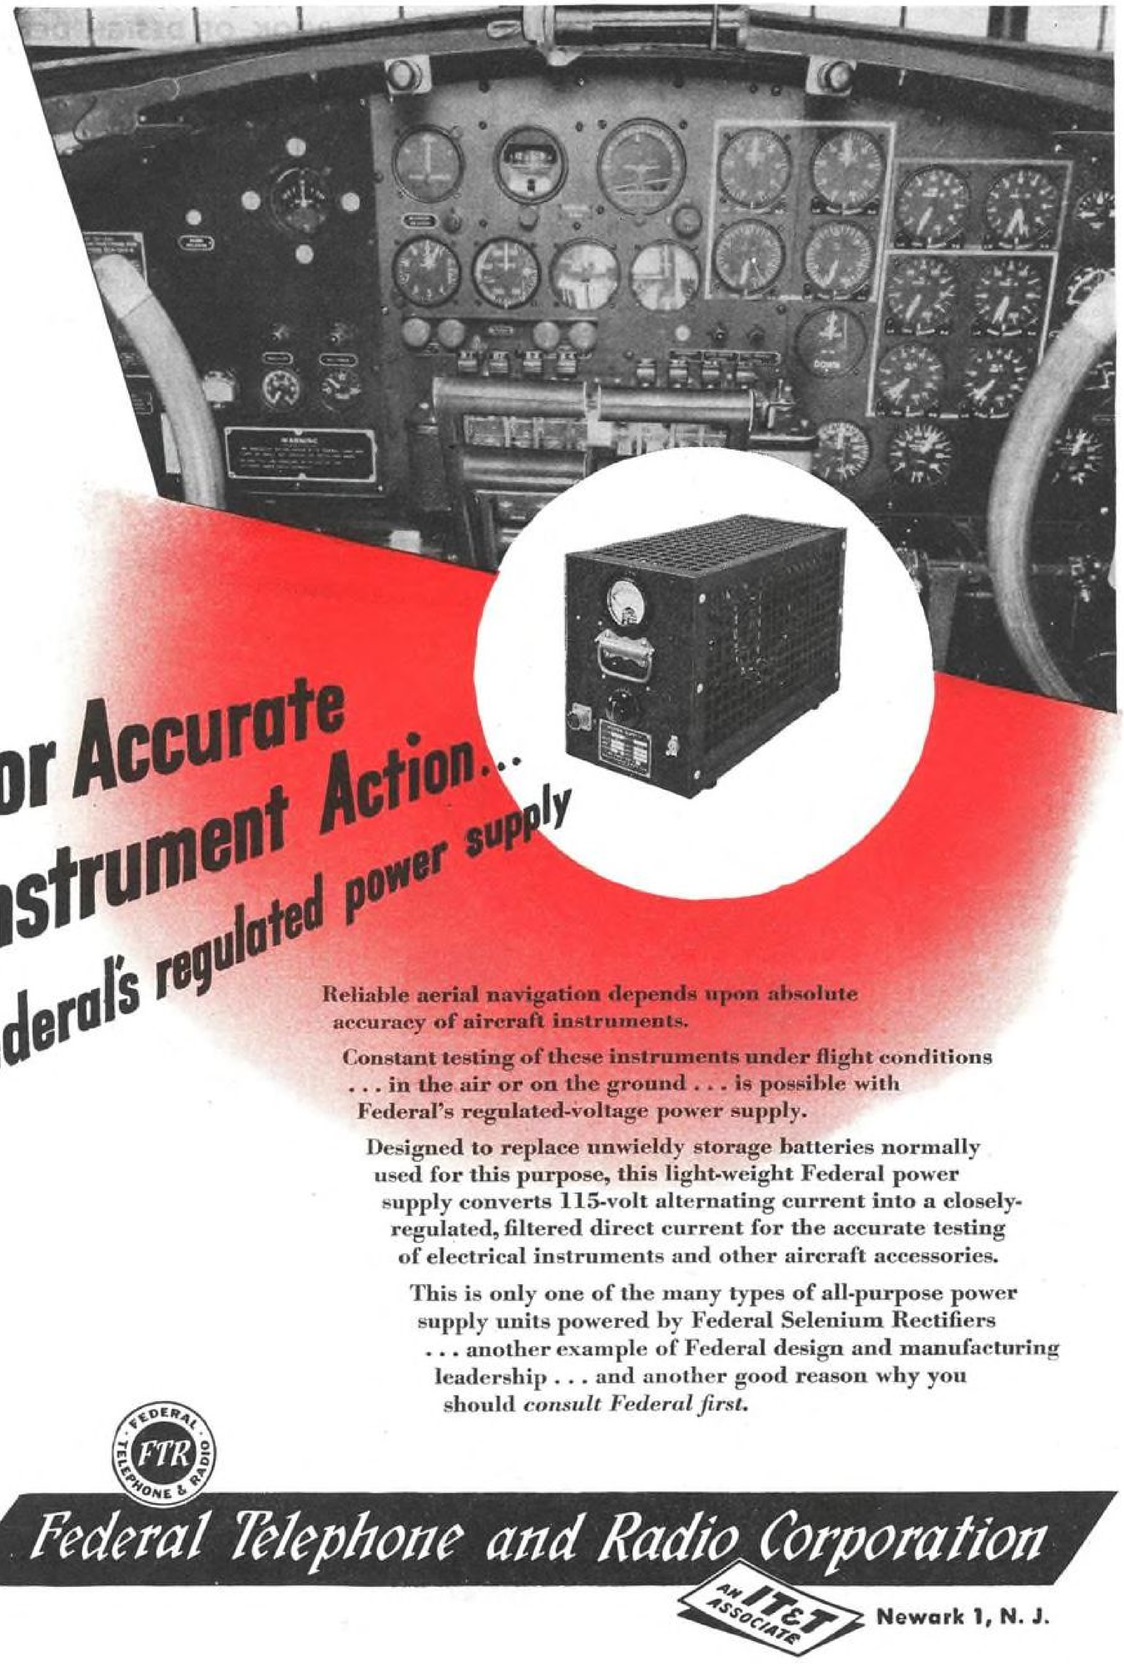

For Accurate Instrument Action...

Federal's regulated power supply

Reliable aerial navigation depends upon absolute accuracy of aircraft instruments.

Constant testing of these instruments under flight conditions . . . in the air or on the ground . . . is possible with Federal's regulated-voltage power supply.

Designed to replace unwieldy storage batteries normally used for this purpose, this light-weight Federal power supply converts 115-volt alternating current into a closely-regulated, filtered direct current for the accurate testing of electrical instruments and other aircraft accessories.

This is only one of the many types of all-purpose power supply units powered by Federal Selenium Rectifiers . . . another example of Federal design and manufacturing leadership . . . and another good reason why you should *consult Federal first.*

FEDERAL TELEPHONE & RADIO — FTR

Federal Telephone and Radio Corporation

AN IT&T ASSOCIATE

Newark 1, N. J.

SHEET NUMBER **D-25**
CLASSIFICATION . . . . . **Materials**
SUBCLASSIFICATION . . . . . **Stainless Sheet Steel**

TEMPER of cold rolled stainless steel is the same as that of sheet brass, aluminum, and copper—*annealled, quarter hard, half hard, three-quarter hard* and *hard,* depending upon amount of working. Principal requirements under AN-QQ-S-772, in percentages, are: C, .12, .15 max. for .050 in. and thinner; Mn, .2 to 2.5; P, .04 max.; S, .04 max.; Cr, 17 min.; Ni, 6.5 min.; Si, .2 to 1.5; Cu, .5 max.; Ti or Cb or other stabilizing element at option of producer. About 17.5 percent Cr and 7.25 percent Ni is widely used, giving high ductility in proportion to tensile strength. The following data obtained from samples from Armco commercial shipments are more indicative of working material than laboratory specimens would be

Estimated Weights Of Stainless Steel Sheets

Chromium nickel stainless steel 42.0 lb. per sq. ft. per inch thick

Thickness	Gage	Decimal thickness, in.	Wt. per sq. ft., lb.
.161 to .176	8	.171875	7.2187
.146 to .160	9	.15625	6.5625
.131 to .145	10	.140625	5.9062
.115 to .130	11	.125	5.25
.099 to .114	12	.109375	4.5937
.084 to .098	13	.09375	3.9375
.073 to .083	14	.078125	3.2812
.066 to .072	15	.0703125	2.9531
.059 to .065	16	.0625	2.625
.053 to .058	17	.05625	2.3625
.047 to .052	18	.05	2.1
.041 to .046	19	.04375	1.8375
.036 to .040	20	.0375	1.575
.033 to .035	21	.034375	1.4437
.030 to .032	22	.03125	1.3125
.027 to .029	23	.028125	1.1813
.024 to .026	24	.025	1.05
.0199 to .023	25	.021875	.9187
.0178 to .0198	26	.01875	.7875
.0161 to .0177	27	.0171875	.7218
.0146 to .016	28	.015625	.6562
.0131 to .0145	29	.0140625	.5906
.0115 to .013	30	.0125	.525
.0105 to .0114	31	.0109375	.4594
.0095 to .0104	32	.01015625	.4265



-30°F 210°F

High or Low Temperatures—
There's Little Viscosity Change

Small change in viscosity over a wide temperature range is one of several important properties that distinguish Dow Corning Fluids. These new silicone products are available in two series, depending on the viscosity grade and freezing point required. In both Type 200 and Type 500 the viscosity change is much smaller than that of any known liquids of equivalent viscosity.

The simplified graph above shows the viscosity grade and temperature slope of Type 200 Fluids compared with hydraulic oils over a temperature range of –30°F. to 210°F. Note the flat slope of the DC Fluid. This illustrates a characteristic that has awakened keen interest. Here are fluids that *stay fluid,* even at temperatures far below zero. Such remarkable properties indicate that these new inert liquids are ideal for many precision instrument damping applications.

DOW CORNING CORPORATION
BOX 592, MIDLAND, MICHIGAN

DOW CORNING SILICONE PRODUCTS INCLUDE:

RESINS—High temperature insulating varnishes for use with heat stable electrical insulating materials.

GREASES—For lubrication of valves in high temperature or corrosive chemical services. Plug Cock Grease—for metal valves. Stopcock Grease—for glass and ceramic valves.

Dow Corning

SHEET NUMBER . . . . . D-25 (cont'd)
CLASSIFICATION . . . . . Materials
SUBCLASSIFICATION . . . . . Stainless Sheet Steel

Data given in this table are conservative values based on tests of samples from numerous commercial shipments of Armco high tensile stainless steel. Strength values given are therefore minimums upon which working stresses can safely be based by the designer. In majority of shipments, strength values will be considerably higher than those indicated here.

PROPERTY	TREATMENT	TEMPER			
		¼	½	¾	F
Ultimate Strength 10^3 psi.		125	150	175	185
Longitudinal tension	Cold rolled	133	162	183	187
	Stress relieved	133	159	178	183
Transverse tension	Cold rolled	135	164	185	189
	Stress relieved	135	162	182	185
Longitudinal compression (at buckling)	Cold rolled	95	134	163	168
	Stress relieved	95	138	169	175
Transverse compression (at buckling)	Cold rolled	95	150	190	198
	Stress relieved	95	150	190	198
Yield Strength 10^3 psi.		75	110	135	140
Longitudinal tension	Cold rolled	75	117	147	153
	Stress relieved	75	123	157	164
Transverse tension	Cold rolled	75	110	135	140
	Stress relieved	75	121	153	160
Longitudinal compression	Cold rolled	62	83	99	102
	Stress relieved	66	104	132	137
Transverse compression	Cold rolled	75	123	156	163
	Stress relieved	75	127	165	173
Proportional Limit 10^3 psi.					
Longitudinal tension	Cold rolled	35	49	59	61
	Stress relieved	44	65	80	84
Transverse tension	Cold rolled	40	63	80	84
	Stress relieved	38	52	63	66
Longitudinal compression	Cold rolled	27	31	34	35
	Stress relieved	44	59	70	72
Transverse compression	Cold rolled	42	60	73	75
	Stress relieved	40	72	95	100
Initial Modulus of Elasticity 10^6 psi.					
Longitudinal tension	Cold rolled	27.0	27.5	28.0	28.0
	Stress relieved	28.0	28.0	28.0	28.0
Transverse tension	Cold rolled	28.5	28.5	28.5	28.5
	Stress relieved	28.5	29.0	29.0	29.0
Longitudinal compression	Cold rolled	27.0	28.0	28.0	28.0
	Stress relieved	28.0	28.0	28.5	28.5
Transverse compression	Cold rolled	27.0	28.5	29.0	29.0
	Stress relieved	27.5	29.0	30.0	30.0
Per Cent Elongation* ** (0.016 to 0.030 in. thick)		25	18	12	9
Longitudinal tension	Cold rolled	46	37	31	29
	Stress relieved	52	39	29	27
Transverse tension	Cold rolled	38	30	25	23
	Stress relieved	58	36	20	17

***Rate of strain—0.2 in. per in. per min.

Courtesy, American Rolling Mills Co.

Review of Patents

By **A. HARRY CROWELL,** *Registered Patent Lawyer*

FOLLOWING are digests of some of the more interesting recent patents on aviation developments granted by the U. S. Patent Office. Mr. Crowell will gladly furnish readers with free information on approximate cost and procedure in applying for patents and trademark registration. Address inquiries to him, care AVIATION, 330 W. 42nd St., New York City (18). Printed copies of any of patents listed are obtainable at a cost of 10c each, directly from U. S. Patent Office, Washington.

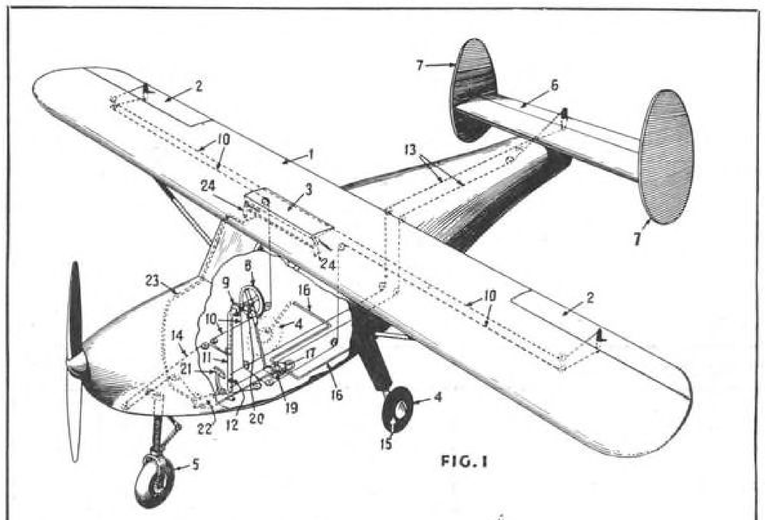


FIG. 1




FIG. 2

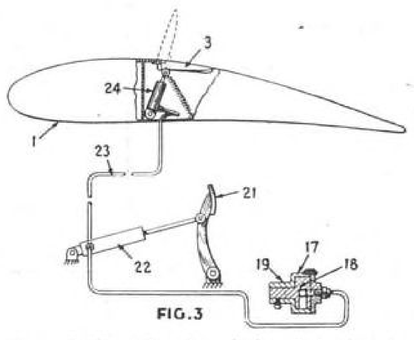


FIG. 3

New Flight and Ground Control means for aircraft is held to be particularly useful in connection with plane of two-control type normally directed by manual operation of ailerons and elevator only, without use of pilot's feet for directional control. Fig. 1 shows wing (1), aileron (2), spoiler (3), main landing gear (4), steerable nose wheel (5), elevator (6), and vertical tail units (7). Deperdussin wheel (8) revolves cable drum (9) to operate aileron cable (10). Control column (11) pivots about lateral axis (12) to move fore-and-aft, operating elevator cables (13). Wheel (8) also operates ground-steering cable (14) whose ends are attached to aileron cables for simultaneous operation so that nose wheel (5) steers to right when wheel (8) is turned to right, and vice versa. Main landing wheel (4) has hydraulic brakes (15) connected by conduits (16) to housing (17). Referring to detailed Fig. 2, latter housing contains rotatable valve (18), seen in neutral position. When valve (18) is rotated from neutral by arm (19) connected to arm (20) on wheel (8), fluid flow to one of brakes is cut off, applying hydraulic pressure to left wheel if turn is to left, and vice versa. Fig. 3 shows how brake pressure is supplied by action of brake pedal (21) on brake cylinder (22) which also supplies pressure through line (23) to spoiler cylinder (24). Initial partial depression of foot pedal elevates spoiler (to desired position up to maximum shown by dotted lines) for glide-path control as in approach to landing area. Continued depression of pedal actuates brakes. This is Patent No. 2,355,026, filed Oct. 9, 1943, patented Aug. 1, 1944, O. C. Koppen, assignor to General Aircraft Corp.

758, filed July 13, 1943, patented July 4, 1944, H. F. Bauknecht.

Airplane Testing Apparatus for use in wind tunnel is designed to simulate accurate flight conditions, permit variation in angle of attack and variation in direction of flight with respect to airstream, and indicate individual component forces contributing to resultant movement of craft. Provided is system of weighing scales and levers to register both positive and negative forces and resolving resultant forces into attendant various components.—2,353,033, filed Sept. 6, 1941, patented July 4, 1944, H. O. Hem, assignor to Toledo Scale Co.

Aircraft Heater adapted to function under relatively high altitude conditions calls for a simplified automatic control system. It utilizes differential pressure created by supercharger to cause flow to heater of combustible mixture and flow therefrom of products of combustion.—2,353,112, filed Dec. 12, 1940, patented July 4, 1944, S. S. La Sha and F. M. Salisbury, assignors to the Bell Aircraft Corp.

Airfoil Invention relating to tailless plane supplies longitudinal-control means consisting of tabbed flaps along portion of trailing edge, to eliminate excessive vertical forces.—2,354,942, filed May 1, 1937, patented July 18, 1944, M. M. Munk.

Hollow Steel Propeller Blade fabrication method utilizes straight tubular blank which is first tapered at ends to produce shape which, when flattened, results in seamless edges at folds of desired profile.—2,354,198, filed July 12, 1941, patented July 25, 1944, L. B. Chubb, assignor (by mesne assignments) to The Aviation Corp.

Inboard End Attaching Means for aircraft wings is particularly applicable to stringer-reinforced metallic stressed skins and is permanently connected thereto by spot welding so that there is efficient transfer of wing stresses to adjacent structure.—2,354,236, filed Mar. 6, 1943, patented July 25, 1944, M. Watter and H. J. Scammell, assignors to Edward G. Budd Mfg. Co.

Method for Protection against attacking aircraft is in direct contrast to area blackout procedure. Invention is intended to utilize unique light pattern to brilliantly illuminate air space above area, thus creating dazzling glare which will blind and confuse pilots of hostile craft, thereby effectively concealing objective.—2,354,665, filed June 22, 1942, patented Aug. 1, 1944, J. H. Church and E. W. Ruestow.

(*Turn to page* 306)

Book Reviews

DIAMOND TOOLS, by Paul Grodzinski. Anton Smit & Co., Inc., N. Y. C., 378 pages, illustrations. $4.50.

This detailed survey deals with the construction and the application of diamond tools by many industries, including, in particular, the metal working industry. Hence, the book is of interest to aircraft and component manufacturers. Data on the properties of diamonds are included. Facts relating to machining of metals, cutting and truing of grinding wheels, and applications in hardness are among the subjects covered.


BOMBERS ACROSS, by Capt. Edgar J. Wynn. E. P. Dutton & Co., N. Y. C. $2.50.

Called the initial book to be written about the Air Transport Command, this volume's story is told with authority. Those who have read only short articles regarding this all-important phase of the war-supplies service will find here an interesting and comprehensive coverage of the subject.

MATERIALS HANDLING, by Lt. Comdr. H. E. Stocker, USNR. Prentice-Hall, Inc., N. Y. C., 309 pages, photos, diagrams, charts. $5.00.

Comprehensive handbook designed to show means of eliminating bottlenecks in the conveying and handling of materials used in industrial manufacturing. Problems are attacked through the

(*Turn to page* 306)

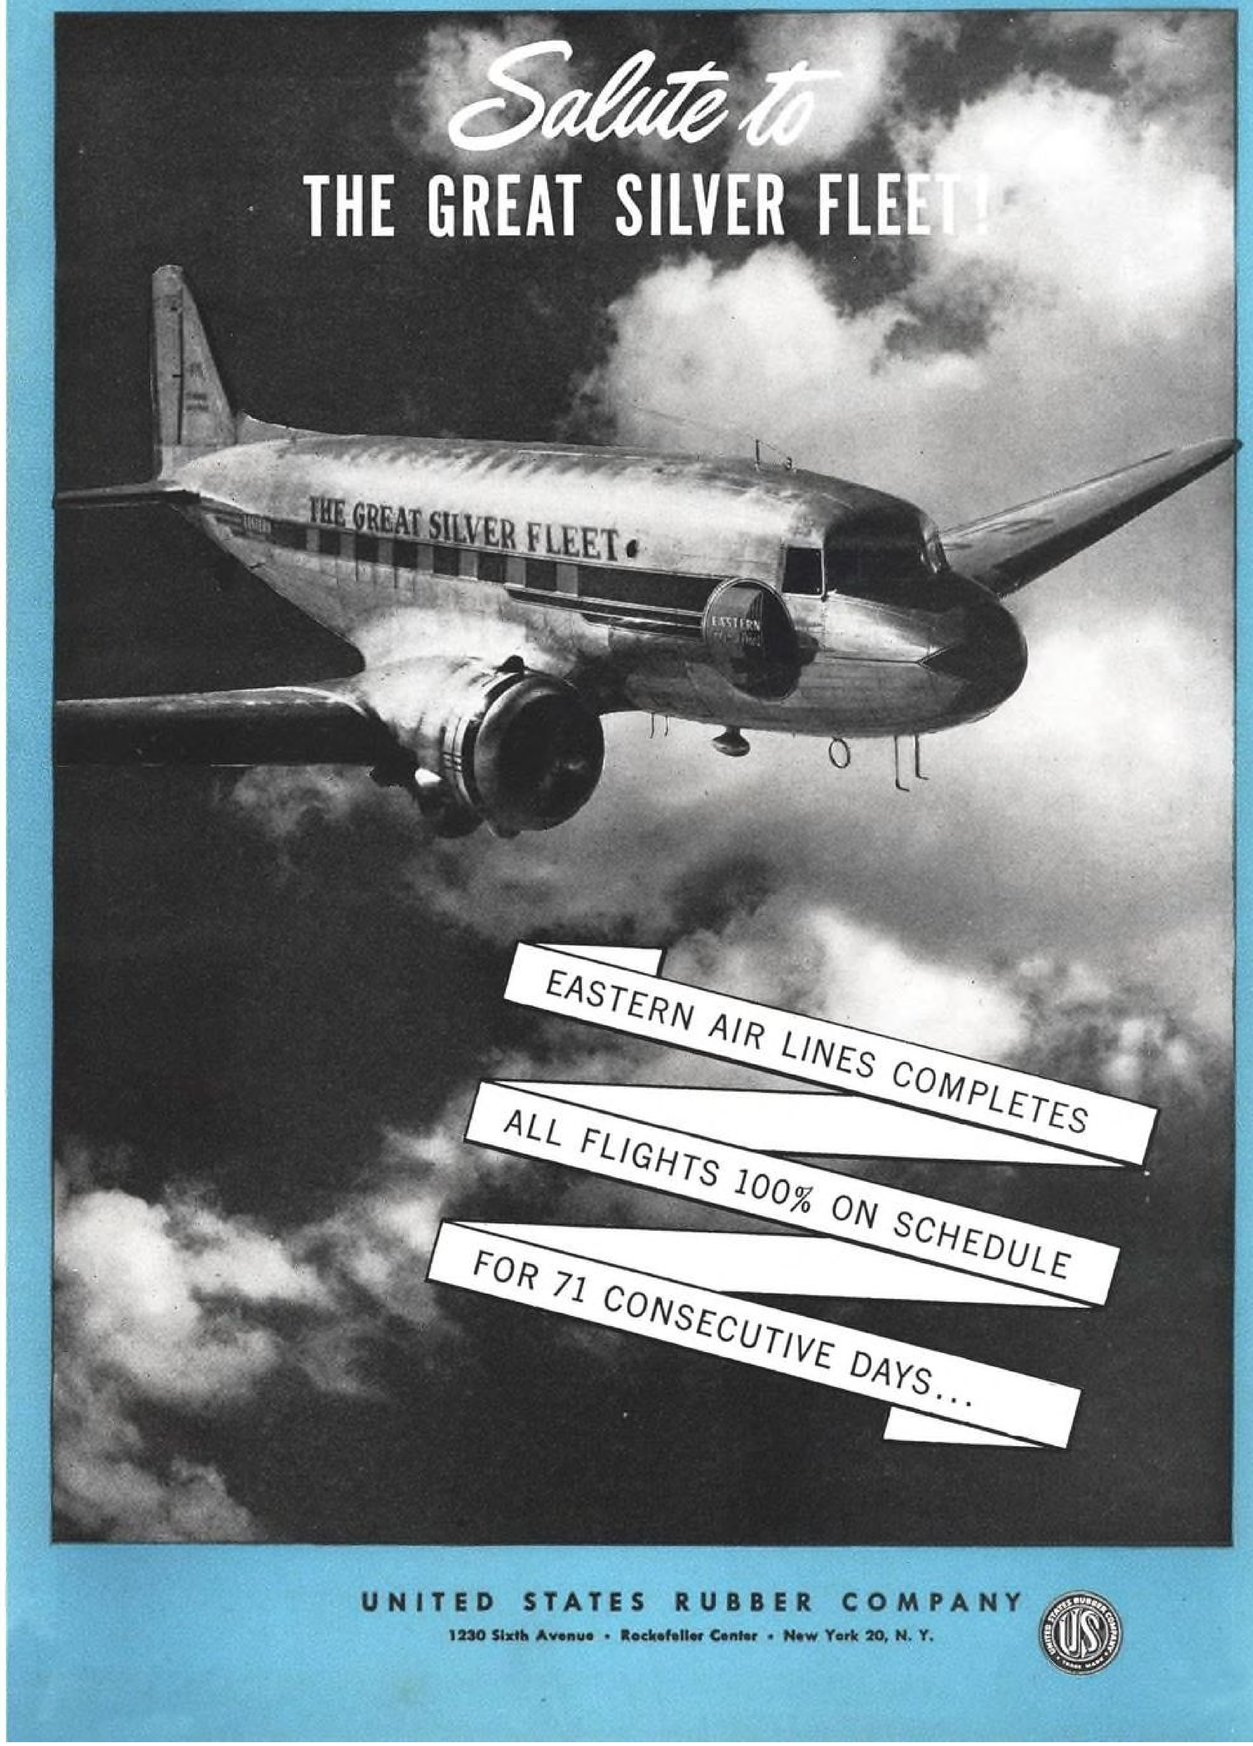



Eastern writes a new page in Airline History!

New York Times Editorial—August 4, 1944

AIRLINE PERFORMANCE

Spectacular accomplishments by bombers and fighters have brought us some realization of the startlingly swift advances which have been made under the stimulus of war in the range, speed and reliability of aircraft. Combat reports have tended to overshadow, however, the correlative advances which are being made in commercial air transport. The airlines, not only in their function as aids and operators for the armed services in a great network of global flying, but in their domestic operation, have taken great forward strides during the war years. With reduced fleets and personnel, they still have been able to set new marks in passengers, mail and goods carried, and in the performance of schedules. Eastern Airlines, for example, has just established a record not heretofore equaled in commercial air transport history, flying all its schedules with 100 per cent performance for the two consecutive months of June and July. During these months the line's "silver fleet" flew 43,000,000 revenue passenger miles in domestic operations alone, while its cargo liners averaged about 20,000,000-pound miles a day.

This performance and that of the other air carriers, which are showing load factors and percentage of airplane use per day which would have been deemed incredible only a few years ago, indicate the expanded air service for which we may look in the days of peace.

TO TIE OR NOT TO TIE

Never was there a day when it was so vitally important to the nation that high-priority air travel move swiftly to its destination . . . that increased loads of air cargo arrive in plenty and on time.

The achievement of Eastern Air Lines in completing all flights 100% on schedule for 71 consecutive days in the face of capacity loads and with daily flying time of every airplane almost doubled over prewar days is a record that in the words of the New York Times editorial of August 4, 1944, "not heretofore equalled in commercial air transport history."

With a fleet reduced 50%, Eastern has equalled and even exceeded prewar records of passengers and cargoes delivered. With each Silverliner in the air an average of 14 hours and 7 minutes every day, Eastern Air Lines maintenance men are doing a greater, more important job than ever.

As a part of Eastern's regular maintenance plan, every part of the plane is checked, double-checked and triple-checked from propeller to tail wheel tire. The results of this program have made possible a great page in airline history, the forerunner of even greater pages ahead.

1230 SIXTH AVENUE **UNITED STATES RUBBER COMPANY** ROCKEFELLER CENTER · NEW YORK 20, N. Y.

AND THEY DID THIS JOB BY

Check, Double Check...and Triple Check



Courtesy of Curtiss-Wright

Station Control Board for Maintenance . . . Upon this board is recorded every maintenance service that must be performed by the ground crew before a plane can be cleared for its next flight.




Giles Photo

Station Check . . . At the end of every trip, Eastern Air Lines ground crews check engines, engine and flying instruments, radio equipment, controls, propellers, tires and brakes.



Courtesy of Curtiss-Wright

Terminal Check . . . The basic station check is repeated plus inspection of electrical, ventilation and air conditioning systems, gasoline and oil strainers and valves. Plane and upholstery are cleaned.

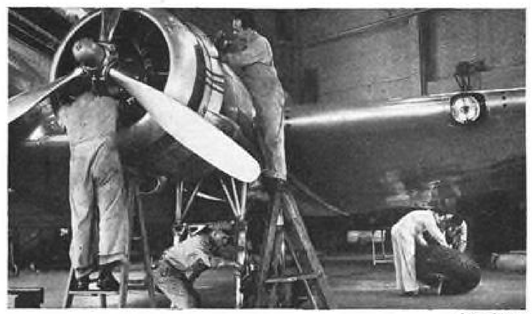


Giles Photo

Base Check . . . This is a complete check-up of the entire plane. Engines, propellers, radio controls, landing gear are inspected with special attention to condition of wheels, brakes and tires.



Giles Photo

650 Hour Check . . . Wheel assemblies are now removed for overhaul. This includes demounting the tire for complete inspection of both tire and tube. Special attention is also given bearings and brakes.

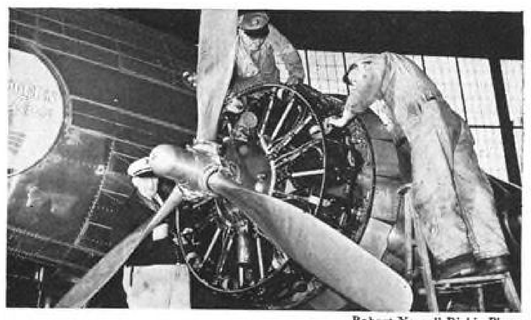

Robert Yarnall Richie Photo

6,500 Hour Overhaul . . . Propellers, engines, electric and radio equipment, lubricating systems, wheels, brakes, tires and all accessories are disassembled and carefully checked before return to service.


SAFETY FIRST, LAST AND ALWAYS

IS EASTERN AIR LINES' CREED



FIRST SAFETY AWARD—In 1937 the National Safety Council instituted the Aviation Safety Award for Safe Air Transportation. On its record of no passenger fatalities in its entire operating history (1930-1936) Eastern Air Lines won this award. The certificate states, "This, according to U. S. Department of Commerce records is the best Air Transportation Accomplishment to date."

LATEST SAFETY AWARD—Other awards followed and again in 1944 Eastern Air Lines won the National Safety Council Award for commercial air lines operating 100,000,000 passenger miles or more annually. Their record for safe air transportation for the period ending December 31, 1943 totaled 635,000,245 passenger miles without a passenger or crew fatality.

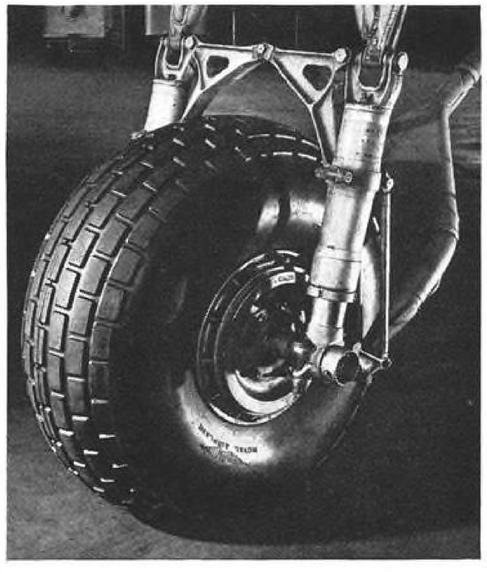

U. S. ROYALS

ARE SAFETY-TESTED, TOO

By test on Eastern Silverliners, in service on landing fields and carrier decks wherever airplanes fly, U. S. Royal Airplane tires have proved their stamina. They are contributing their part in making landings and take-offs safer under heavier loads and tougher operating schedules.

To give the extra strength, extra safety needed to do this wartime job, "U. S." pioneered lighter, stronger rayon and nylon cord constructions now used throughout our Armed Forces. On the air routes of the world, on airliners, bombers, fighters and giant transports, U. S. Royal Airplane tires are setting new safety records day by day.

Listen to the Philharmonic-Symphony program over the CBS network Sunday afternoon, 3:00 to 4:30 E.W.T. Carl Van Doren and a guest star present an interlude of historical significance.

SERVING THROUGH SCIENCE TO SPEED THE VICTORY

UNITED STATES RUBBER COMPANY

1230 SIXTH AVENUE • ROCKEFELLER CENTER • NEW YORK 20, NEW YORK

The AVIATION NEWS

BLAINE STUBBLEFIELD, Washington HERB POWELL, New York

Need Better Personal-Plane Pricing, Safety, Utility to Realize Big Market—T. P. Wright

. . . Favors federal-local cooperation in program for fields . . . ACCA distributes 20,000 airpark booklets . . . Light plane "go-ahead" . . . Do surplus-auctions queer plane market? . . . "Modify personal-flying rules," says Chamber . . . Award Sikorsky, Gregory AHS fellowships . . . Flight-area bans being lifted.

To attain a total personal plane ownership of 400,000, and a delivery rate of 175,000 a year, within 5 to 10 yr. after the war, the industry will have to create designs having better combinations of price, safety, and utility than they have now, in the opinion of T. P. Wright, newly-appointed administrator of Civil Aeronautics.

In a conversation with AVIATION's Washington editor, Mr. Wright emphasized his judgment that the industry has done an excellent job. But, he said, there are many problems. Some producers have achieved attractive prices, some offer a high degree of safety, and others have favorable utility—however, none so far produced has all the features necessary to justify the market hoped for.

The helicopter is moving toward the desired characteristics, Mr. Wright stated, adding that producers of fixed wing types can meet non-professional requirements if they will recognize the problem as a difficult one and set out to beat it.

Opinions expressed by Mr. Wright, former vice-president and director of engineering with Curtiss-Wright, and responsible head of aircraft scheduling up to the peak of production in this war, are regarded as indicative of CAA policy in the coming transition of civil aviation back to a peace basis.

The Administrator stated that an annual personal plane output rate of 175,000 would constitute a good-sized industry. At $2,000 apiece, sales would total $350,000,000 a year. Comparing the personal plane market with that of air transport, Mr. Wright pointed out that even if sales in the latter category should reach 500 per year, at $200,000 per unit, the total would be only $100,000,000.

Favors Federal-Local Program for Fields

One important step that must be taken toward greater utility and safety of personal aircraft is not in design at all but in expansion of the system of airports, airparks, and airstops, so that flyers can land near destinations. Mr. Wright favors early action by Congress, providing federal money to be matched with local funds, nearly all for private aviation. Rep. Jennings Randolph has introduced such a bill, HR 5042, which would authorize $100,000,000 annually for 10 yr. to build fields.

Meanwhile, the Civil Aeronautics Administration, after a year of study, is recommending to Congress a similar program, which may be incorporated with the Randolph proposal.

Public and industry opinion is almost unanimous in favor of an airport program, concentrating on small airfields. The Personal Aircraft Council of the Aeronautical Chamber of Commerce has sent out more than 20,000 booklets to guide town, county, and state authorities in location, design, and construction of in-town airparks.

Both the council and CAA express the hope that local governments will not wait for federal aid but will go ahead on their own and be ready for peacetime air activity. All concerned recognize the difficulty of finding close-in land and of meeting complaints against airplane noise and caring for necessary zoning, etc.

Light Plane "Go-Ahead"

By the time you read this, several light plane manufacturers probably will have been authorized to commence production for civilians. WPB aircraft officials believe such a step is desirable to make planes available to fixed base and taxi operations which will employ returning military air crewmen. WPB Order L-48 provides that war manufacturers may apply for authority to shift to civilian production.

When this was written, WPB was surprised that only a half dozen had applied. It was believed, however, that all were making preparations and had overlooked L-48. At present, manufacturers shifting to civilian work are required to show substantial orders for essential products. It is believed that this provision is being repealed, but even if it is not, probably the light plane people can show the necessary orders.

Do Surplus-Auctions Queer Market?

Whether or not surplus light planes being sold at auction curtail the market for new deliveries is a matter of disagreement among manufacturers. Some say that sale of used military types will stimulate new sales, while others insist that unsatisfactory experience with purchases, and low trade-in value, will hurt the market. Whatever the truth may be, surplus sales may not be as large as many



FIRST PHOTO OF INVADER

Described by War Department as newest and fastest all-purpose bomber, this is Douglas A-26 Invader, specifically designed for either low or medium altitude operations against enemy ground and naval forces and installations. Combined in craft are heavy firepower and bomb capacity plus great speed. Power is supplied by twin Pratt & Whitney 2,000-hp. R-2800 Double-Wasp engines. NACA low-drag (laminar flow) airfoil section is employed, and double-slotted flap is a feature. Design for maintenance simplification stresses accessibility to parts, and nose takes special-mission equipment on production line, thus saving trip to modification center.

Coming Up

November 9-10: Fall Meeting, Institute of Aeronautical Sciences, Dayton.

November 13-14: National Association of State Aviation Officials, Annual Meeting, Skirvin Tower Hotel, Oklahoma City.

November 13-14: Annual Fall Convention of Society of the Plastics Industry, Waldorf-Astoria Hotel, New York.

November 14: National Aeronautic Association, Board of Directors Meeting, Skirvin Tower Hotel, Oklahoma City.

November 15-18: Second Annual Clinic of Domestic Aviation Planning, Oklahoma City.

December 4-6: Society of Automotive Engineers National Air Cargo Meeting, Hotel Knickerbocker, Chicago.

December 5-7: Aviation Distributors & Manufacturers Association, Second Annual Meeting, Hotel Jefferson, St. Louis.

December 6-7: National Aviation Trades Association, Annual Convention, Hotel Jefferson, St. Louis, Mo.

December 17: Wright Brothers Lecture, Institute of Aeronautical Sciences, Washington.

January 8-12: Society of Automotive Engineers Annual Meeting & Engineering Display, Book-Cadillac Hotel, Detroit.

January 30-February 1: Thirteenth Annual Meeting, Institute of Aeronautical Sciences, New York.

April (date to be announced): Spring Meeting, Institute of Aeronautical Sciences, Detroit.

observers have been figuring.

Nearly all of the 5,400 WTS trainers have been sold. Army light liaison planes so far declared surplus total not more than 2,000. It will be months before many more can be released. Probably the majority of those overseas will not be worth shipping home. Most of the heavier basic trainers will not be suitable for private operation, though crop dusters, some schools, and some foreign governments may take large numbers of them. For a while the hungry market will absorb every item available.

"Modify Personal-Flying Rules," Says Chamber

Modification of regulations on personal flying is recommended by the Personal Aircraft Council, Aeronautical Chamber of Commerce, in a statement to William A. M. Burden, Assistant Secretary of Commerce; L. Welch Pogue, chairman of CAB; Theodore P. Wright, administrator of CAA; and Senate and House aviation committees.

Council Chairman J. T. Geuting, Jr., urges a reduction of "must" regulations to the "enforceable minimum," the substitution of "should" suggestions, and a "safety in flight" educational campaign. Any citizen should have the right to secure a pilot's certificate with ease comparable to getting a driver's license, the Committee says.

The council asks that rules governing aircraft type certification be re-drafted, giving manufacturers more responsibility and the government less. It is remarked that the automobile industry has achieved world leadership through industry initiative, unhampered by government regulation.



C-82 IS FLYING BOXCAR

Capacious Fairchild C-82 Packet is 50,000-lb.-class 3,500-mi.-range aircraft designed to carry tanks, supplies, and troops. And mounting two P. & W. 18-cyl. R-2800-22 engines, each affording 2,100 hp. at takeoff, craft is built to operate into and out of small fields. Squarish fuselage features vertical walls and unobstructed space for its entire length, and floor of the compartment is parallel to ground for ease in loading through hinged aft-section of body, which opens laterally to full width and height. Craft is of metal construction, and span is 106 ft. While present production is for AAF, peacetime passenger and cargo use of plane is foreseen. It is estimated that airline model would carry 76 patrons by day and 30 by night in berths; and seats could be removed in an hour to make ship a freighter.



'COPTER GOES COMMERCIAL

Postwar potential of rotor craft is typified in this Aeronautical Products helicopter, Model 1-A, assembled and test-hopped by Wiggins Airways, Norwood, Mass., for it recently flew in first commercial flight, delivering packages for Wm. Filene's, Boston. Shown are: H. E. Shaw, executive director of Wiggins, C. C. Layman, v.-p. of AP, and J. Garside, Wiggins' president. Designed by AP Pres. Alfred Jackson, craft has Franklin 4-cyl. horizontally opposed engine, developing about 130 hp. Large toothed-wheel protruding just forward of landing gear is driven off crankshaft and drives under-floor shaft to rotor mast. Three-bladed main rotor has steel tubular spar built up with ribs and fabric. Power for craft's anti-torque rotor is taken off main rotor mast through gearing at fixed rpm. ratio of 2:1. Front nose grill takes in cooling air in forward flight, aiding blower fan fed through top grill. Recent exhibition of this 'copter to New Yorkers visiting at Bonwit Teller store was first step in nationwide tour arranged by Promotional Production Co., sales technicians.

Award Sikorsky, Gregory AHS Fellowships

First honorary fellowships in the American Helicopter Society were recently awarded to Igor Sikorsky and Col. H. Frank Gregory at the society's initial annual dinner in New York City, a gathering at which it was announced that membership exceeds the 200 mark. C. L. "Les" Morris, president, tendered the certificate to Mr. Sikorsky; Ralph P. Alex, AHS' first president, made the award to Col. Gregory.

Pointing out that helicopter engineering still has many difficult problems to solve, Pres. Morris declared that the industry needed sizable funds for research and development. He suggested a starting fund of $10,000,000, possible to be allocated to NACA, since the results would then be open to the entire industry, and he noted that "it seems reasonable that the basic, well-rounded research program funds should be granted by the government."

Accepting his award, Mr. Sikorsky declared that "no other engineering development has moved as fast as has the helicopter", and he said there was "no doubt about the 'great future' of the craft. America is leading in helicopter development," he declared, adding that the country "should, through research and development, maintain this leadership."

Civil Air-Fuel Rationing Now Under CAA

After a months-long battle between OPA, WPB, PAW (Petroleum Administrator for War), and CAA, the latter was given control of rationing 73-80 octane gasoline for non-scheduled aviation. OPA, as the government's rationing agency, didn't want to break precedent by letting gasoline out of its hands; CAA contended its special knowledge and field facilities were essential to equitable distribution, and won.

Effective Nov. 1, CAA safety inspectors began supervision of allotments to airport retailers, who apportion fuel to essential uses: Pilot training, transport of persons and cargo, and maintenance of aircraft airworthiness. None goes for barnstorming, sightseeing, or joy hopping.

Flight-Area Restrictions Now Being Lifted

Flight corridors leading out of a number of airports in formerly restricted areas have been approved by the Army. Accordingly, it is now possible for civilian pilots to fly out of defense areas in eight locations.

National Aeronautical Association gave the number of airports thus relieved as about 60, however the Army has not confirmed the total, it only named the approved corridors. These lanes are about 3-mi. wide and the boundaries specifically defined.

Permission to lift such restrictions is first obtained from Fighter Command headquarters, then CAA assigns channels out of the zone.

★ SPOT CHECKING ★

Stand of Airlines Committee for U. S. Air Policy, favoring "regulated competition" in international air transport, has now been presented in 27-page documentary brochure, "Worldwide Airlanes for United States Airlines, Competition vs. Monopoly."

Cost of Boeing B-29's is revealed by ATSC as being approximately $600,000 on current production models, contrasting with $3,392,396 outlay on initial ship.

New step toward simplifying private flying regulations is order easing certification of physically handicapped. Persons having physical defects need now only prove their ability to fly safely, though limitations may be placed on types and makes of craft, or compensating remodeling may be required.


United Nations' production of 100-octane gas exceeded combat and training requirements in October, for first time bringing accumulation of needed working stocks.

Two coast-to-coast flight records have been approved by Contest Board of NAA. Both made on Mar. 12 in P-51 Mustangs, they are: West-to-east with refueling (Kansas City), 6 hr. 31 min. 30 sec., by Col. C. A. Peterson, USAAF; and west-to-east nonstop, 6 hr. 39 min. 30 sec., Lt. Col. Jack Carter, USAAF. Previous transcontinental mark was 7 hr. 28 min. 25 sec. by Howard Hughes, Jan. 19, 1937, in Hughes' special monoplane.

Digest of authoritative predictions on postwar aviation is

MAMMOTH DIE-PRESSED FORGED ALUMINUM PISTON

by REVERE

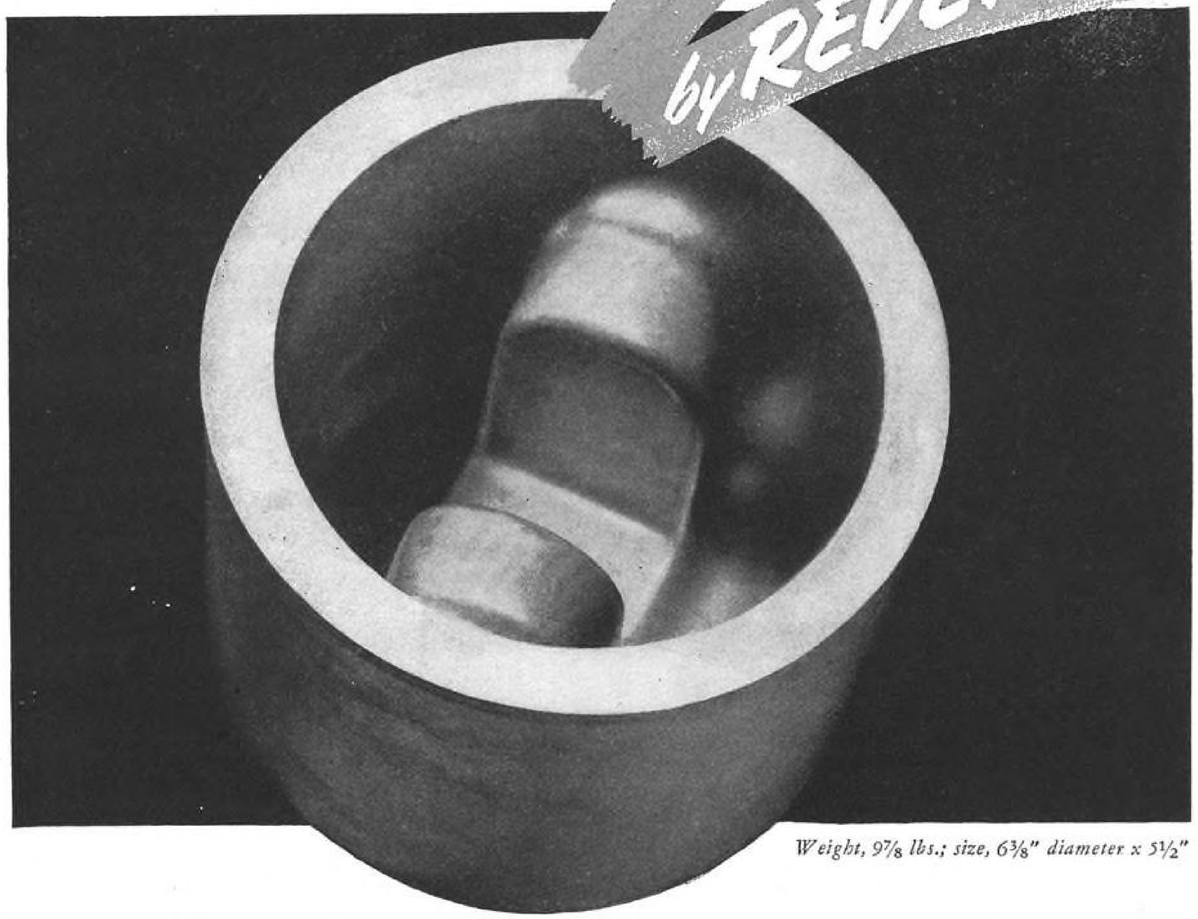

Weight, 97/8 lbs.; size, 63/8" diameter x 5½"

THIS is really a large piston, used in high-power engines for the bigger bombers and freighters. It is made by the die-pressed forging method pioneered and perfected by Revere. Previously, any such shape would start as a casting. The Revere method produces a vastly improved product, having a close-grained, homogeneous structure of increased strength. Even the most intricate shapes can be made quickly, and so accurately as to require a minimum of machining. Revere forgings are also available in magnesium, copper and copper alloys.

The piston pictured is made from 18S alloy rod, designated as 18ST after heat treating. In the post-war period fewer pistons of this size will be required; instead, the chief demand will be for much smaller ones for plane, passenger car and truck use. When that time comes, remember the advantages of the Revere forging process. We shall be glad to cooperate with you *now* in planning for the future.

TECHNICAL ASSISTANCE: The Revere Technical Advisory Service is at your command in working with aluminum and magnesium alloys. Send for your complimentary copy of the *new* booklet "Revere Magnesium Alloys and the Light Metals Era." Also available: the 54-page manual, "Revere Copper and Copper Alloys—Technical Information for Product Designers." Write Revere Executive Offices.

REVERE


COPPER AND BRASS INCORPORATED

Founded by Paul Revere in 1801

Executive Offices: 230 Park Ave., New York 17, N. Y.

Brazing—

Tool of the Honeycomb Makers

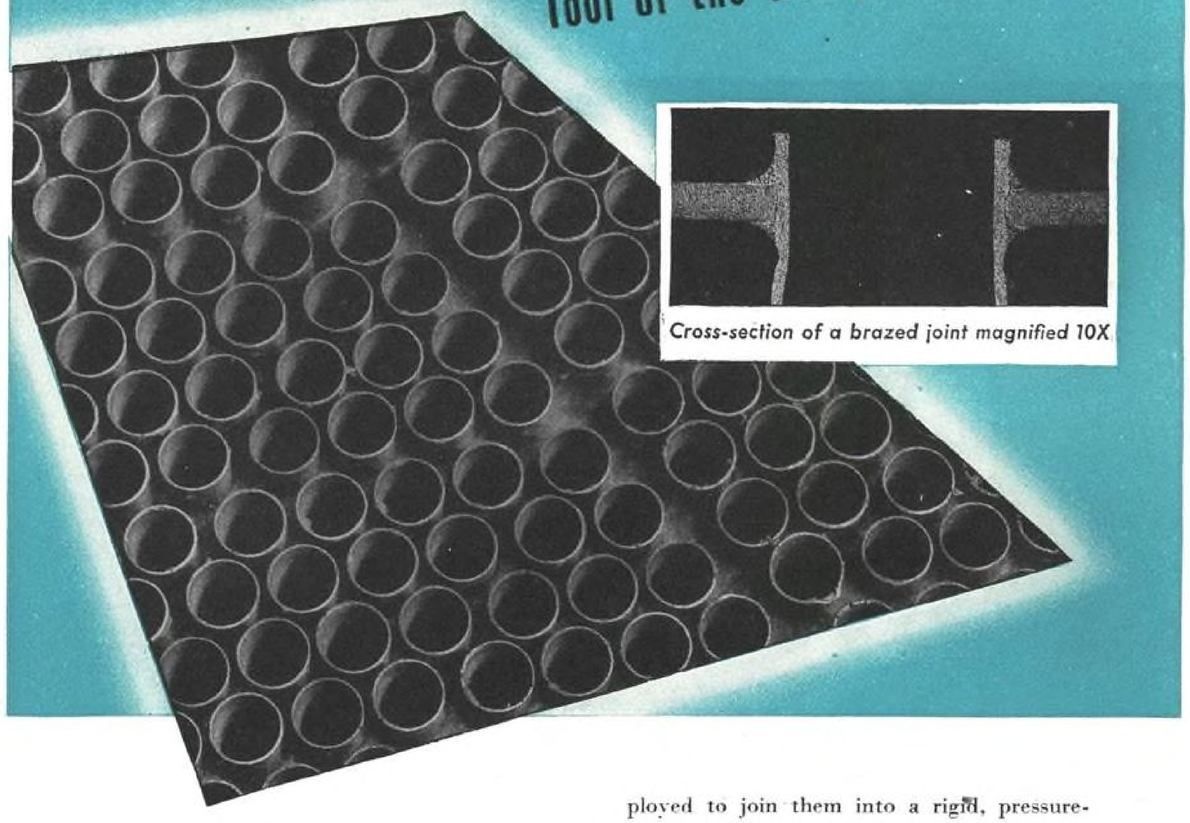

Cross-section of a brazed joint magnified 10X

Fabrication of lightweight aluminum cores for many types of heat exchangers—aircraft radiators, oil coolers, heaters—is accomplished by brazing. Aluminum alloys contribute strength and light weight, superior heat conductivity and resistance to corrosion. The brazing process provides speed and uniformity of production.

In the tubular-core section pictured above, thin-walled aluminum tubing and Alcoa sheet, perforated to receive the tubes, are assembled in a fixture which holds all parts firmly in place. Furnace-brazing is then employed to join them into a rigid, pressure-tight unit. Other fabricators may employ flux-bath brazing, hand welding and brazing, or combinations of all methods.

How the molten brazing alloy flows at the line of contact, forming a fillet which bonds all parts securely together, is seen in the above photomicrograph.

Alcoa will assist you in adapting the brazing process to your products, advising on initial and final cleaning methods, fluxes and brazing temperatures. For this help, write ALUMINUM COMPANY OF AMERICA, 2182 Gulf Building, Pittsburgh 19, Pennsylvania.

ALCOA ALUMINUM

offered in "Aviation Predictions," 31-page booklet prepared by Aviation Research Associates, New York, for Simmonds Aerocessories, Inc. Private flying, air transport, and military are covered in handy collation of forecasts by aviation leaders.

AAF logged 20,100,000 military flying hours in continental U. S. during first six months of 1944, as compared with 13,400,000 hr. for same period in '43. Despite big increase, fatal accidents were reduced, with over-all accident rate dropping 29 percent in first five months.

Seven steps are called for by Harry Woodhead, Convair president, to aid aviation industry demobilization: 1. Adequate unemployment insurance, 2. transport of workers to new jobs or bona fide homes, 3. prompt contract termination, 4. advance notices of cutbacks, 5. earliest resumption of civil aircraft manufacture, 6. intelligent surplus-aircraft disposal, and 7. continuation of college air training program.

More than 40,000 Cyclone 18 engines are called for in next 15 mo. to power Boeing Superfortresses, states Col. J. M. Gillespie, deputy chief, Engineering & Procurement, ATSC.

A 2-yr. course in aviation operations management, established at request of the industry, has been inaugurated at Texas A. & M. College to train airport and fixed-base operations managers, reports Dr. Howard W. Barlow, acting dean of engineering.

Newly dedicated is $1,250,000 airfield at Deer Park, Wash. There are three paved runways, each 6,100-ft. long and 150-ft. wide, built to handle heaviest planes.

San Francisco Chamber of Commerce has formed an aviation department to coordinate activities of Bay Area Aviation Committee, managed by Kenneth R. MacDonald. Aim is to establish city as leading passenger and freight air terminal of West.

Meanwhile, super air terminal is planned by Oakland, Calif., Board of Port Commissioners, which has announced $10,000,000 will be spent at Oakland Municipal Airport for improvements exclusive of hangars and other structures.

New gyro lead-computing gunsight "brain", jointly adapted for mass production by Bendix and Eastman Kodak, is American version of British Mark II-D device (see photo, page 226, Oct. AVIATION). Navy aerial gunners are employing sight.

"London Star" reports air pickups by Allied planes of patriots behind German lines, source of story being a broadcast from Sweden. First, it is reported, parcel containing special harness is dropped by chute, then man wearing this rigging lies flat on ground, plane swoops low, harness is hooked onto tow rope, and man is hauled aboard. Remarking on feasibility, Pres. Halsey R. Baxley of All American Aviation, says, "We know it can be done."

Through minor changes by Martin company engineers, Plexiglas noses for B-26 Marauders now become tail enclosures for Navy Mars craft.

Lawrence Aeronautical Corp., Linden, N. J., announces adoption of new insurance benefit plan for its workers. With all costs assumed by company, approximately $5,000,000 in life insurance—ranging from $2,000 to $8,000 per employee—now covers 1,200 personnel.

Poll by Minneapolis "Star-Journal & Tribune" finds two out of three Minnesotans plan either postwar business or pleasure jaunts on commercial airlines.

Willingness to pay up to 5c-per-mile fare is reported by 66 percent of airminded. Interest in flying planes was noted by 27 percent, and in ownership of craft by 21 percent.

Opinion checkup by "Woman's Home Companion" found 51 percent of those women who responded interested in flights to Europe "if round trips cost $200"; 64 percent were attracted by prospect of flights to South America; 88 percent said they had no objection to a member of family owning planes and 39 percent expressed desire to learn to fly.


Returns on questionnaire distributed to aviation-minded by Aircooled Motors Corp., Syracuse, N. Y., indicated 87 percent of those replying wanted monoplane as postwar craft, 51.3 percent prefer low-wings, and 64.5 percent desire a land plane as compared with 28 percent preferring an amphibian. Cruising speed of 125-150 mph. was most popular (39 percent), with 20 percent asking for 115-125 mph. More than half said 40-50 mph. is most practical landing speed. Cruising range of 500-600 mi. was specified by 30 percent. Majority spoke for metal fuselage and wing covering, while 57 percent requested seating capacity of four persons. Regarding engines: 57 percent voted for aircooled, horizontally opposed; 32 percent for 6 cylinders; 27 percent for geared engines; and 42 percent for 100-to-150-hp. plants.

Hamilton Standard announces successful 6,000-hr. test in cooperation with AA of a new lacquer anti-icing substance called Icelac. Sprayed onto propeller blades, lacquer is stated to last for hundreds of flying hours.



TURBINE TALK

G. Geoffrey Smith, directing editor of British magazine "Flight," tells members of Wings Club, New York City, that development of gas turbine power plants for aircraft will progress faster than many in industry now believe possible. Noting advantages of rotary motion as against reciprocating, he pointed out that straight jet propulsion is of most value at extreme speeds and altitudes, and he envisioned widespread use of turbine-propeller combination for transports operating at lower altitudes and medium speeds. Seated (left to right) are Dr. Theodore von Karman of Caltech; J. Carroll Cone, Wings Club president; and W. D. Pawley of Inter-Continent Corp. (PAA photo)

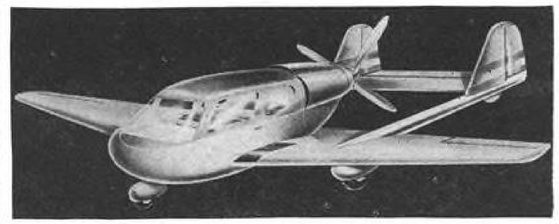

DESIGN FOR TOMORROW?

This sketch by Donald J. Wheeler, engineer with Boeing Aircraft Co., Seattle, won first prize of $1,000 war bond in professional class of recent "Plane You'd Like to Own" contest. As noted, Wheeler's proposal is for clean-lined twin-tailed family-type low-wing craft mounting aircooled pusher power plant. Conducted by magazine, "Popular Science," competition aimed to bring out preferences in peacetime personal-plane design, and wide interest was reflected by fact that more than 3,300 drawings were submitted.

AMERICA AT WAR

Aviation's Communique No. 35

Weakening steadily, able to fly less than one-tenth as many sorties daily as the Allies, the Luftwaffe fights on. Probably some Nazi guerilla airmen will be aloft to the last day. Germany's ability to take 34,000 tons of fire and explosive bombs in a week, dropped by warplane fleets of 5,000, and still produce while resisting the world's three great powers, continues to impress aviation commands.

Particularly interesting to all Army branches are current demonstrations of the ability of airborne infantry and artillery to go overhead of front-line resistance and take and hold ground back of the enemy. Here, failure of a British troop outfit to hold on till reinforcements could break through is a mere incident in the long-range picture of airborne power. Encirclement on the ground may one day lose its terrors, and belligerents may expect an army to drop on them, any hour, any place. Air supply of armies is second in importance only to the flying of soldiers themselves.

Concerning types of aircraft to be used by AAF after production cutbacks, Lt. Gen. Barney M. Giles, Deputy Commanding General and Chief of Air Staff, said recently that standardization would be on three basic fighters, four heavy and very heavy bomber types, and two medium bomber types. Over-all cutbacks will be about 40 percent when Germany quits.

American airmen in all theaters are using an armor-piercing incendiary 50-cal. bullet that sets fire to enemy gasoline tanks, rendering self-sealing obsolete. Rocket missiles, now used by all belligerents—fired from ground, ship, and plane, also plane to plane—have great possibilities. Advantage is that the launching device is light as compared with a gun throwing equivalent demolition power. Rocket accuracy, so far, is not good. Army announces the new Thunderbolt XP-47N, with a longer range for attacking Japan, is in production, with regular P-47's tapering off. Thunderbolts have been packing the rockets, with little impairment to their performance.


Navy Uses "Jato"

Due to short takeoff runs on carrier decks, Navy is leading off with Jato — jet-assisted takeoff. Success seems inevitable; bomb, ammunition, and supply loads are greatly increased. Smoke interferes with following takeoff, but that will be licked. Jato has important commercial implications.

Navy announces the Vought F4U-1D has doubled its capacity, now carrying two 1,000-lb. bombs. The Banana River Naval Air Station, Florida, has perfected a beaching gear that doesn't need large handling crews.

Seekers of knowledge on the



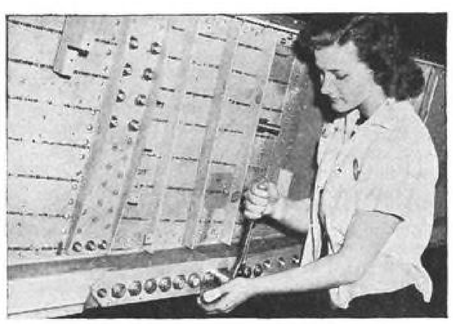

Photograph shows National Screw AN hex head and NAS close tolerance bolts being used in fabrication of a main structure of the Boeing B-29 Superfortress.

A sizable segment of American industry shares in the production of the Boeing B-29. Like the old fable of the blind men and the elephant, the Superfortress means many things to many people. To us at National Screw it means the last word in fasteners.

Throughout this giant plane, both in the airplane proper and in the instruments and armament, *National* screws, bolts, nuts, studs, rivets, cotters and many special fasteners are used by the thousands.

Following are a few of the *National* fasteners in the B-29:

NAS and BAC close tolerance bolts.
NAS internal wrenching bolts.
BAC bearing bolts.
AN bolts, nuts and screws—complete line.
Carburetor Studs.
Instrument Screws.

National HEADED AND THREADED PRODUCTS

THE NATIONAL SCREW & MFG. CO., CLEVELAND 4, O.

war against Japan should read Office of War Information's report. It says the Japs are building about 1,500 airplanes per month. Our airmen are still beyond effective bombing range, except with the B-29's. To hit effectively, OWI says, we shall have to base within 500 to 600 mi. of objectives. The contrast between present bombing of Japan, and round-the-clock operations against Germany, are extreme—and still Germany fights. We're now in the Philippines, and as the Nips back toward home they can concentrate their air power withdrawn from outposts, and they probably can increase their aircraft production.

★ CANADIAN NOTES ★

By James Montagnes

To develop postwar civil flying, a three-man Canadian Air Transport Board has been set up. This body will regulate the recently enacted Canadian Aeronautics Act and also advise the government on ways and means of bringing about a rapid and well-planned expansion of air transport. R. A. C. Henry, of Montreal, has been named as CATB chairman for a period of 10 yr., while Air Vice Marshal Alan Ferier, Ottawa, was appointed for 7 yr., and J. O. Romeo Cachon, Montreal, for 4 yr.

Canadian Propellers of Montreal, subsidiary of Canadian Pratt & Whitney Aircraft, recently delivered its 10,000th propeller.

Control of deHavilland Aircraft of Canada, has been transferred from J. Grant Glassco, government controller, to a three-man board. The company was taken over by the Canadian government in connection with manufacture of the Mosquito.

★ CALLING NAMES ★

John S. Allard, formerly vice-pres. of Curtiss-Wright Corp., has been promoted from Colonel to Brigadier General, AAF. Gen. Allard, who is with 8th Air Force, entered Army in 1942 as Asst. Chief of Staff, 12th A. F.

Reginald E. Gillmor, president of Sperry Gyroscope, and Harry F. Vickers, president of Vickers, Inc., have been elected vice-presidents of Sperry Corp., parent organization of both companies. Gillmor and Vickers will continue to head their respective companies.

J. O. Almen, head of General Motors Research Laboratories' mechanical department in Detroit, has been awarded Manly Medal for his research and data on shot blasting to increase fatigue resistance in aircraft and engine parts.

All American Aviation elected following directors: **Halsey R. Bazley, Charles F. Benzel, W. Sam Carpenter III, Frank M. Donohue, Mrs. Richard C. duPont, Charles W. Wendt,** of Wilmington, and **Arthur P. Davis, George S. Leisure,** and **David Rawson** of N. Y. C. Officers re-elected by directors are: Pres., **H. R. Bazley;** v.-p. traffic, **Harry R. Stringer;** v.-p.-treas. **C. W. Wendt;** v.-p. manufacturing and development, **Edward E. Minor, Jr.;** secy. & gen. counsel, **Austin M. Zimmerman;** asst. secy. **Frank J. Trelease, Jr.;** asst. treas. **Harry S. Fries;** and comptroller, **Walter C. Gebelein.**

Aerco Corp., subsidiary of Transamerica Corp., announced retirement of **C. A. Herberts,** founder and president, and election of **Timothy E. Colvin** as new president and member of board of directors.

Joseph D. Boylan has been made regional cargo traffic manager for American Airlines.

Alfred Marchev, pres. of Republic Aviation Corp., is the new president of AWPC, East Coast.

J. G. Holland is named general attorney for Continental Air Lines. **Stan Johnson** has been made director of public relations.

Convair's Miami div. announces appointment of **Norman W. Storey** to take charge of contract terminations, and **R. L. Sullivan** as staff asst. to **A. R. Johnson,** div. manager. Company's Fort Worth div. process engineer, **J. A. Lapham,** has been named a regional director of ASTE.

Braniff Airways' **Capt. Merrel Brock** celebrated his 25th anniversary as a pilot. Capt. Brock joined Braniff in 1934.

American Casualty Co. & American Aviation & General Ins. Co. announces appointment of **Fred N. Davey** as v.-p. in charge of aviation insurance department.

Arney C. Leathers has been named chief of the Approach Control Center which CAA is opening in Bermuda for Navy.

Lieut. Col. Murl Estes, AAF, formerly chief pilot of PCA has been assigned to Bolivia as U. S. military air attache.

Capt. Otis E. Kline, veteran UAL pilot, has been elected a director of the Wayne Pump Co., Ft. Wayne, Ind.

Roy Martin, Post Office airmail superintendent, has been named Deputy Second Asst. Postmaster General.


Adam M. Butler was appointed head of Sparton School of Aeronautics' new vocational rehabilitation dept.

William T. Grant, pres. of the Business Men's Assurance Co., of Kansas City, Mo., has been elected a director of Aircraft Accessories Corp.

Northwest Airlines announced appointment of **D. C. Vaile** as asst. to Western traffic manager, with offices in Seattle.

James C. De Long becomes director of advertising for TWA.

Lockheed Aircraft Corp., announces appointment of **Roy Campbell, Jr.** as advertising manager, succeeding **Howard W. Cheney,** who resigned early this year.

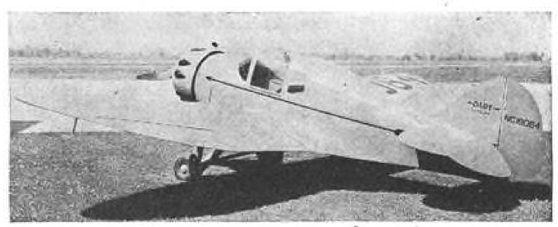

"UNDER NEW MANAGEMENT"

Ray Applegate, designer of Applegate Amphibians, has formed partnership with Romer Weyant, company v.-p., under name of Applegate & Weyant Engineering Co., which has purchased design, jigs and fixtures, and inventory of Dart Aircraft Corp. New organization plans to service Darts now in operation and to produce both amphibious craft and improved version of craft shown above. Applegate is currently making survey trip to locate manufacturing facilities.

THE WASHINGTON WINDSOCK



By BLAINE STUBBLEFIELD

What to do with surplus combat airplanes is one of Washington's most serious aviation problems. Tests indicate the labor cost of disassembly to segregate metals may be more than the scrap is worth. Yet, with metal resources seriously depleted by war, junkpiling these aircraft to let them disintegrate in oxydation would raise public criticism.

Nearly everybody concerned was pleased with the candor of CAA Administrator T. P. Wright in his statement regarding utility, safety, and price status of existing personal aircraft design with relation to the market. He said no single design is good enough on all three counts—that while the industry has done a fine job, it has a bigger one still to do.

Organization of a broad system of transportation in the third dimension is one of the most difficult jobs the human race has yet undertaken. If the 50-nation international conference obtains agreement on just two or three basic principles, it will have done well. But there will be no rest from these problems in your lifetime.

Betting odds favor surface transportation to win, eventually, authorization to establish auxiliary air transport service. Combined voting power of rail, automotive, and shipping will steamroll the opposition. Odds are on the "chosen instrument" theory of home-flag foreign air services to lose, eventually, in favor of controlled competition. Voters want free opportunity for all comers.

The Stubblefield award goes to Army Public Relations for releasing a story about two helicopters which flew from the East Coast to Indiana in five days, making twelve stops, and averaging 65 mph.

Air shows and air races will resume, postwar. Aero Chamber of Commerce is already planning to demonstrate airplanes as safe, sane and sedate, economical and useful. There'll be "tours" with Aunt Rachel's picture in the handouts, interior design for wives, and engines for the man who doesn't know what's under the hood. As for races, the industry wants Army and Navy to be the dare-devils.

Official amazement, and disappointment, increases as the Germans, growing weaker, continue at press time to demonstrate ability of a people in total war to keep on producing and fighting under unprecedented air attack. The effect of air power on Japan will be watched hopefully, but closely, and if the Nips can take it, strategic aviation will be scheduled for a revaluation.



"Moms—Ask Daddy to Go Up to 5000 Feet
. . . And Find Out How Far We Can See"

THIS is no "dream scene." This is Mr. and Mrs. Tomorrow on a week-end trip . . . and little Betty doing some "back seat driving." Sooner than she thinks, tens of thousands of youngsters like her will be reading the simple instrument panels on family planes as casually as they read the speedometer on the family car.

Actually, the instrument panel of the post-war family plane will have a very familiar look. Simple . . . streamlined . . . easy to read . . . with dependable Stewart-Warner instruments telling at a glance all the driver needs to know.

Today, the post-war family plane is on active, non-combat duty. Stewart-Warner instruments ride in such planes. They're the same instruments that will make the air travel of tomorrow's families carefree, sure and casual.

Into these instruments go all the experience Stewart-Warner has gained in equipping millions of motor cars, power boats and industrial engines of every type. And the new knowledge gained in war will result in simple, accurate panels of instruments that will do the job.

Thus, Stewart-Warner will cooperate with the aviation industry to help America take its wings for granted. One more step in providing "low cost flying for everybody."

INSTRUMENTS BY
STEWART-WARNER CORPORATION
CHICAGO ILLINOIS

September Output is 7,598 Planes, Down 341; W-11 Schedule Calls for 101,944 Craft in '44

. . . New cutbacks are reported; lags on A-26's and B-29's . . . Three industry puzzles . . . Payment ruling smooths contract termination . . . Trainers sell, but combat craft are problem.

Numerical warplane production has declined each month, except in May, for six months. The all-war high point was last March, with a total of 9,118 units. Production for April was 8,343; May, 8,902; June, 8,049; July, 8,000; August, 7,939; and September, 7,598.

The September total represented 92,700,000 lb. including spares; or about 1,200,000 lb. less than August.

Increasing emphasis on heavy bombers, plus constant design changes, plus manpower shortage, caused the leveling off short of the anticipated 10,000 - per - month rate. In addition to above causes, recently-ordered program cutbacks are now contributing to the declining monthly rate.

Production of Boeing B-29's reached a new high in September. At the same time, J. A. Krug, WPB chairman, succeeding Donald Nelson, said labor deficiencies are holding super-bomber production behind expectations, despite efforts to improve labor recruiting and work efficiency. Mr. Krug criticized the public for shifting its interest and energies to post-war matters.

So great is the current backlog of other warplanes, in action, in pipelines, and in process, that military commands are not deeply concerned about any category except that of the new big bombers which alone are able to attack Japan heavily from present nearest bases.

W-11 Calls for 101,944 Craft in '44

WPB'S new W-11 aircraft production schedule, replacing schedule W-10, cuts the four-engine bomber program from 18,081 to 17,955 in 1944, and from 16,161 to 12,862 in 1945. Medium two-engine bombers are reduced slightly to 7,373 this year, and increased from 3,121 to 3,842 in 1945. Light two-engine and single-engine bombers are reduced in both years. Fighters are cut from 42,861 to 40,595 this year, and from 48,361 to 43,526 in 1945.

Total of combat planes is reduced 3,640 units this year, and 10,907 next year. There are slight increases in trainers, liaison, and special purpose categories in 1945. The total aircraft program for 1944 is 101,944, reduced from 106,745. Total program for 1945 is 96,824, reduced from 107,466, a cut of 10,642 for next year.

New Cutbacks Reported; Lags on A-26's, B-29's

The largest company cutback went to the Lockheed plant at Burbank, where an order for 1,947 P-38 Lightnings was canceled. War Department said this was to make way for a new type of plane.

A reduction of 1,286 C-47's from the Douglas plant output at Oklahoma City was the second largest, numerically. This reduction takes effect slowly through all of next year.

An increase in the output of Curtiss C-46 Commandos was indicated by the War Department, eliminating future production of 435 P-40's. The small remaining schedule of Boeing Kaydet trainers was eliminated to allow for more production pressure on B-29's at Wichita. Bell's schedule of P-63 Kingcobras was cut by 325 units, but the company will continue at top level with more steam behind other products.

Psychological effect of aircraft cutback orders, and of battle victory news, make it extremely difficult for WPB, the armed forces, and the manufacturers to maintain efficiency of management and labor. In urging the people to stay on the job, WPB Chairman Krug pointed out that the 1944 program of Douglas A-26 production was only 27 percent completed through August; B-29's, 42 percent; heavy duty trucks, 45 percent; and heavy artillery ammunition, 50 percent.

These were cited merely as examples. After V-E day, Mr. Krug said, most of the programs that now seem difficult will be easy. He said there is no prospect of cutbacks in the A-26 Invader and B-29 Superfortress program.

Payment Ruling Smooths Contract Termination

The aircraft industry won an important point in its program for a workable contract termination policy when Robert H. Hinckley, director of contract settlement, issued a regulation authorizing contracting officers of Army, Navy, and other procurement agencies, to pay 75 percent of manufacturers' claims and up to 90 percent within 30 days of application, with additional payments upon submission of adequate accounting data. Payments are made to prime contractors on their own applications, and to subcontractors on applications made through their prime contractors.

The 75 percent payment is alternative with the T-loan program as a source of conversion funds. The T-loan is administered by the Federal Reserve System. Contracting officers appear to have almost unlimited power in making settlements, but this has not yet been tested.

Three Industry Puzzles

Presidents and top officials of 15 leading aircraft manufacturers, meeting last month in Washington during sessions of the Aeronautical Chamber of Commerce, were mainly concerned about survival of their companies after the war. Three principal problems, outlined by E. E. Wilson, chairman of the Chamber's Board of Governors, are contract termination, disposal of surplus aircraft, and surplus plants.

First thing stated to be needed is quick termination of contracts and immediate payment from the government, to provide funds with which to initiate peacetime projects. The aircraft men hope they will be allocated sufficient labor to get started on civilian production when they are released from war work.


Trainers Sell, But Combat Craft are Problem

Nearly all of the 5,400 War Training Service (CAA) light planes have been sold at auction, and for satisfactory prices. Next will be offered about 6,000 heavier military training planes. These will sell much slower, being less desirable, and prices may break down.

Most difficult job facing the aviation division of the Surplus War Property Administration is disposal of combat craft. A test breakdown of a B-24 shows that man-hours required in the disassembly job cost more than the salvage can be sold for. Both domestic and foreign U. S. sources of metals have been seriously depleted by this war.

It is expected the public won't like scrapping of any planes. Probably a way will be found to stock-pile useless warplanes, even if it costs money.


It will be some time before any number of military transport planes will be declared surplus. However, SWPA's pricing policy on surplus planes includes a program for transport planes, to be inaugurated when the time comes. Transports are broken down into two groups: Multi-engine equipment of more than 17,500 lb. gross, and single- and multi-engined planes of less than that weight but more than 5,000 lb.,—in general calculated for main lines and the feeder lines, respectively.

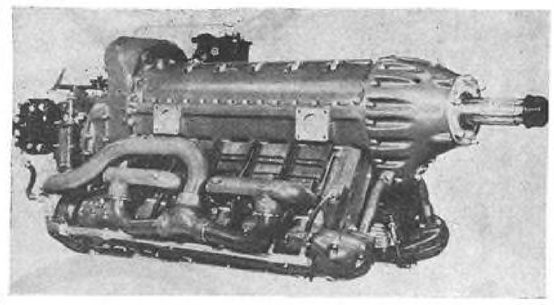

NEW RANGER FOR PEACE

With takeoff rating of 700 hp. and low weight of 870 lb., this new engine is intended for postwar commercial applications. Maker is Ranger Aircraft Engines, Div. of Fairchild, which believes power plant will be specifically suitable for use in feeder-line planes. Engine is 12-cyl. inverted-V aircooled type, and it measures 74.92 in. long, 33.28 in. wide, and 31.11 in. high. Company states it is prepared to go into production as soon as war ends.

Hydraulic LIMIT SWITCH

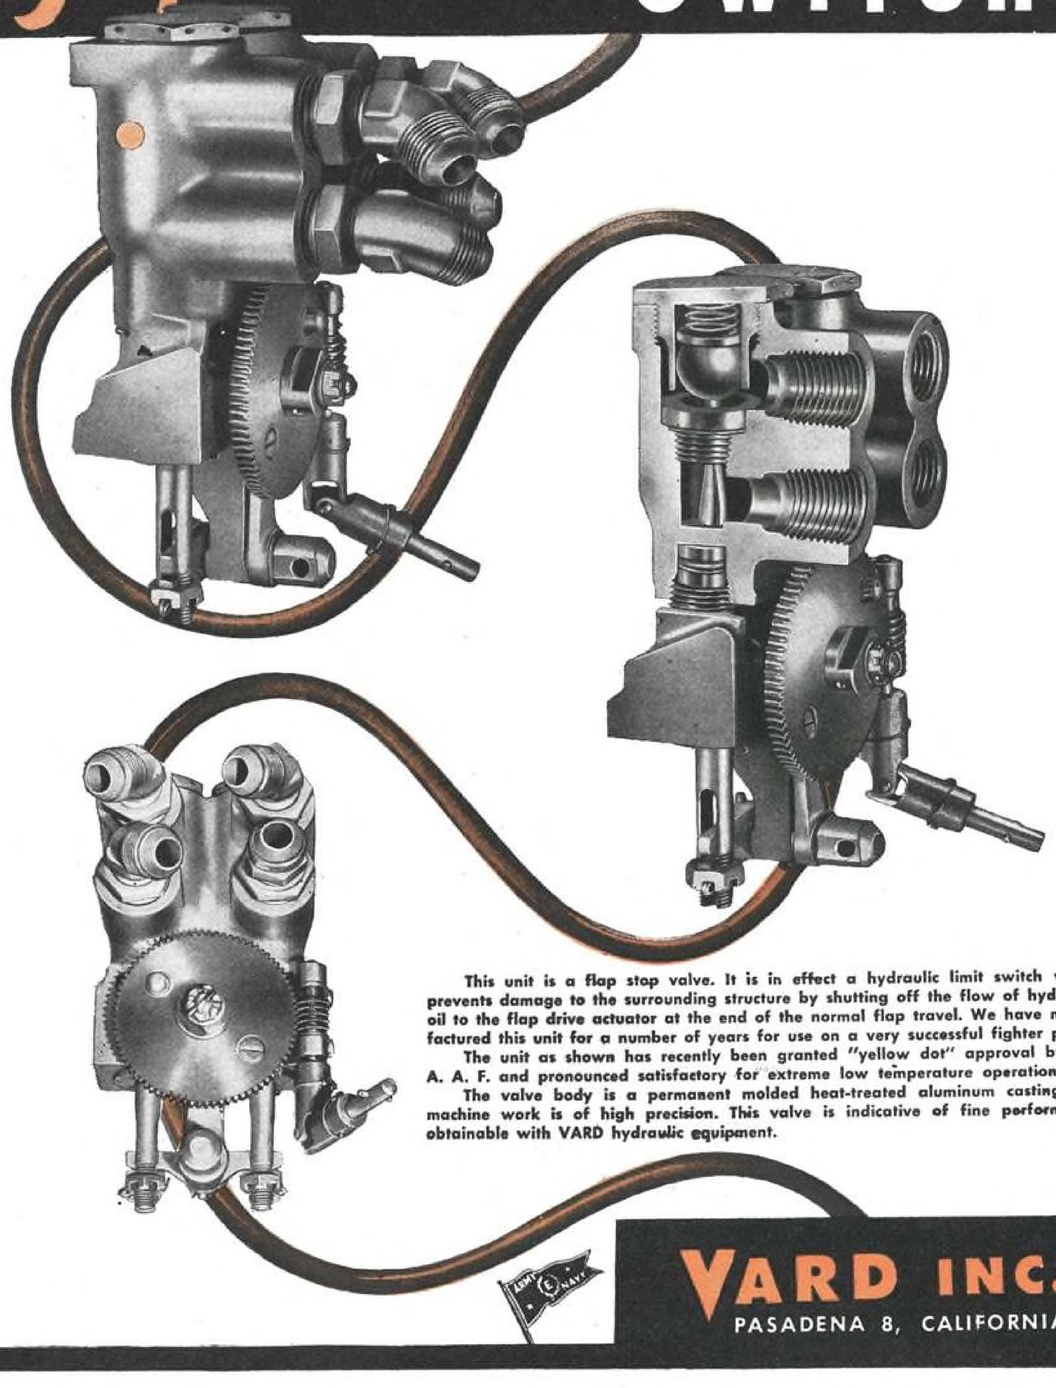

This unit is a flap stop valve. It is in effect a hydraulic limit switch which prevents damage to the surrounding structure by shutting off the flow of hydraulic oil to the flap drive actuator at the end of the normal flap travel. We have manufactured this unit for a number of years for use on a very successful fighter plane.

The unit as shown has recently been granted "yellow dot" approval by the A. A. F. and pronounced satisfactory for extreme low temperature operation.

The valve body is a permanent molded heat-treated aluminum casting. All machine work is of high precision. This valve is indicative of fine performance obtainable with VARD hydraulic equipment.

VARD INC.
PASADENA 8, CALIFORNIA

Prices will be based on average manufacturing cost of base models during the first half of 1944. Purchasers are warned that prices may be revised downward. This may cause early airline acquisitions of surplus planes to be made on a lease or terminable installment basis. Transport planes will be allocated among the airlines.

★ ASSEMBLY LINES ★

The 10,000th P-47 Thunderbolt was rolled from Republic Aviation's Farmingdale assembly line in September, less than 2½ yr. after first P-47 was delivered to AAF. Ship No. 10,000 represented 6,290 man-hours.

Convair has TBY-2 Sea Wolf (Vought design) in production at Allentown, Pa., plant. New torpedo bomber weighs about eight tons, carries pilot, gunner, radioman, and bombardier.

Last A-20 Havoc fighter-bomber left Douglas Santa Monica plant in September. Assembly line was being torn down behind 7,098th plane to make room for increased production of 4-engine transports. Havoc type is being supplanted by company's newer, faster, more heavily armed A-26 Invader.

Lockheed has revised production schedules to handle five type craft—new AAF fighter, Army's C-69 Constellation, P-38, B-17, and Navy's PV Ventura. Latest contracts for new fighter, P-38, and B-17 raised company's backlog to over a billion dollars.

Nash-Kelvinator's first Sikorsky XR-6 helicopter has been flown.

Boeing-Douglas-Lockheed B-17 group delivered 10,001st Flying Fortress in October. Boeing has made 6,143, Douglas 1,982, and Lockheed 1,876. Each company contributed a ship for "over the mark" ceremony.

Bendix Aviation Corp., Illinois div., publicly demonstrated value of exploded views in production assembly by having an 11-yr.-old boy put together correctly 500-odd parts of company's injection carburetor in less than 2 hr.

Convair's Miami div. plant reduced lost time accidents by 75.3 percent in 12 mo. ending Aug. 31. For same period year ago, division averaged 23.65 lost time accidents per million manhours, whereas this time average was but 5.85. In first eight months of this year the accidents fell to 4.16 per million man-hours, compared with an average of 15.25 in first 8 mo. of '43.

Adel Precision Products Corp., Burbank, Calif., has received Army and Navy orders for over $3,000,000 worth of aircraft hydraulic controls.

Douglas announces it has topped industry in number of individual WPB awards for plant suggestions issued this year. Santa Monica plant received 102 awards out of 138 suggestions submitted.

Fairchild Camera & Instrument Corp., N. Y., has been commended by Army-Navy on its field service organization set up in all war theatres.

North American Aviation reports production of 80 percent more Mustangs at Inglewood plant today than a year ago, also average monthly output of Mitchells at Kansas City plant is reported 66 percent greater than in '43. Company states it has been able to reduce average cost of P-51's to government by more than 18.5 and of B-25's of 26.5 per cent over costs on Jan. 1.

Preparation of standards, specifications, and test codes designed properly to adapt aircraft electrical equipment and systems for combat requirements has been undertaken jointly by AWPC, AIEE, SASC, NEMA, and SAE at Air Technical Service Command's request. Program will enable industry to establish standards which will eliminate need and cost of subsequent testing, make industry study and findings practical basis for future Army-Navy specifications.

Thompson Aircraft Products Co. is reported to have WPB approval for purchase and installation of some $475,000 worth of new machinery, tools, and equipment to make an additional aircraft engine device.

Stating ample aluminum ingot is on hand, WPB has ordered further cutbacks in output at four government-owned facilities. In addition, Aluminum Co. of America will cut down production at four plants.

Success of Curtiss-Wright's "Back Up Our Battleskies" war production drive has brought issue of Supplement No. 3. Theme of this new comprehensive appeal to workers is "Stay on the job."

★ FOR THE RECORD ★

Wickwire Spencer Steel Co. has moved its purchasing department from N. Y. C. to Buffalo. Company's Mechanical Specialties Div. has moved from N. Y. to Clinton, Mass.

Whitehead Co., Cleveland, has opened a direct Chicago sales office in Pure Oil Building. New office is headed by C. T. Craig, former director of purchases.

Lear, Inc., is new name of Lear Avia, Inc., Piqua, Ohio. Because of company's extension into outside fields it was considered best to drop word "Avia".

U. S.-Mengel Plywoods has now opened additional distributing units in Atlanta, Ga., and in New Orleans, La. Plans call for new units in other cities.

National Battery Co. will build a new testing laboratory for its Gould Commercial Div. plant at Depew, N. Y.

Cook Electric Co., Chicago, has added Metal Fusion Corp. of America as subsidiary.

Optimus Equipment Co. has been organized in Matawan, N. J., to make metal-cleaning units. It will operate closely with Hanson-Van Winkle-Munning Co.

Mitchell Mfg. Co., Chicago, lighting equipment maker, has joined with Tru-Ad Co. of Los Angeles, Cal. Los Angeles factory will operate as Mitchell Mfg. Co., Tru-Art Div.

George Gorton Machine Co., of Racine, Wis., machine tool maker, has appointed Russell, Holbrook & Henderson, N. Y. C., as exclusive New England representative.


Nigg Engineering Co., Covina, Calif., has appointed United-Carr Fastener Corp., Cambridge, Mass., its exclusive sales representative for Nigg universal adjustable fastener stud for entire U. S. except for Calif., Oregon, and Wash. Pacific coast inquiries should be sent to Covina office.


Firestone Tire & Rubber Co. will offer complete line of aircraft products, accessories, and supplies through dealer-merchandising program. First companies franchised are Page Airways Co., Rochester, N. Y., and Municipal Airport & Flights, Inc., Cleveland.

Union Carbide & Carbon Corp. announces formation of Plastics Group as fifth products division of company.

General Controls Co., Glendale, Calif., valves and parts maker, has opened a new Kansas City branch at 421 Southwest Blvd., Kansas City, Mo., with Robert Courtney in charge as branch manager.

Fairchild Engine & Aircraft Corp., N. Y., is moving operations of its Duramold Div. from N. Y. to Burlington, N. C., where work will be headed by T. Kelly Pierce, div. asst. mgr.

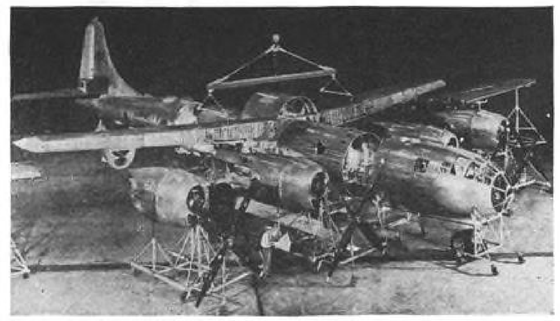

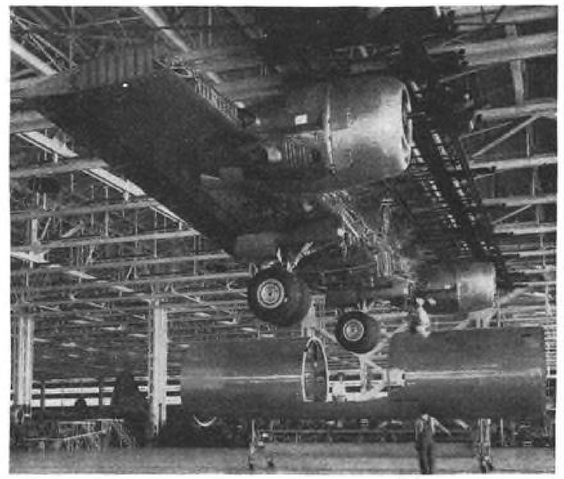

HOW SHE GOES TOGETHER

Just what does it take to assemble one of Boeing's hugh B-29 Superfortresses? These striking photos, snapped at company's Wichita plant, give a graphic idea. Top: "Exploded" view—not a sketch but the actual components—vividly illustrates all sections in their relative positions before final joining. In fabrication, these parts come together at scheduled points along production line. Above: Here, 17-ton main wing section of B-29—already fitted with dual wheels of main undercarriage and with two of four engines mounted—is lowered into central portion of fuselage. Latter is jacked up to give ¼-in. spread as the two perfect-fit units come together. When jacks are removed, slack is taken up and pre-bored bolt holes are exactly aligned.

★ KNOW-HOWS ★

Republic uses a photo-reproduction process to turn out engineering layouts for its subcontractors and Evansville plant. Called Ray-Production, Method uses a patented luminous coating on metal to make master negatives of drawings. In addition to time saving and economy, method enables Republic to handle its' lofting needs with 67 men.

GE has designed an automatic engine cooling flap regulator employing a temperature sensitive material which, acting as a "mechanical flight engineer," regulates flaps at predetermined temperatures. Flaps never open wider than necessary, thus reducing wind resistance and increasing plane speeds.

Interstate Aircraft is employing sawdust as a cleaning compound for removing dirt and oil from aircraft parts after magnetic inspection and prior to further handling. Parts are tumbled or rolled in a bin, and adhering sawdust is blown off with air hose.



Grasshopper turns HUNTER

The "Grasshopper" . . . the smallest of all U. S. military planes . . . earned its name in action. Flown by an artillery officer, it hops up from a cow pasture or a runway made by a bulldozer, climbs its scant one or two thousand feet and hovers to direct the fire of the artillery below. If attacked, it can swoop down to safety, hug the ground and hedgehop back to its Artillery base.

Wire and cable have helped to give the "Grasshopper" the dependability to carry out its job . . . wire for ignition . . . instruments . . . radio. Every type of wire and cable manufactured by Auto-Lite for modern aviation meets the rigid demands of this exacting industry. We have had numerous requests for Form No. C-503 covering Steelductor Cable, and Form No. 838 on Low Tension Cable. Write for your copies today.

THE ELECTRIC AUTO-LITE COMPANY

SARNIA, ONT. *Wire & Cable Division* PORT HURON, MICH.

BACK THE ATTACK—BUY AND KEEP MORE WAR BONDS

AUTO-LITE AIRCRAFT WIRE and CABLE

TUNE IN "EVERYTHING FOR THE BOYS" STARRING DICK HAYMES — EVERY TUESDAY NIGHT — NBC NETWORK

International Civil Aviation Parley Opens; CAB Route Hearings Seen as Long Grind

. . . NA opens service into N. Y.; purchases CW-20 planes . . . Compete for "gateways" . . . Douglas craft accented in airline orders . . . Carrier taxes studied . . . PCA and EAL buy planes . . . ATC operations of AA and UAL revealed . . . SAE meeting considers airliner improvements.

The United States took the initiative in world air transport affairs when the State Department invited representatives of some 55 nations to participate in the International Civil Aviation Conference, which began November 1 in Chicago.

Program suggested in the Department's invitation is: (1) Arrangement for immediate establishment of "provisional" routes which would serve during the war-to-peace transition period; (2) establishment of an interim council which will collect and analyze experience looking toward a permanent world air transport organization and operating system; (3) study of the preliminary groundwork of the proposed over-all aviation convention.

It is assumed that Russia and Britain had agreed to the U. S. proposed agenda for the conference during recent exploratory meetings. Inclusion of 55 nations in current deliberations indicates to observers that while the United States intends to secure a position in world air commerce commensurate with its volume of traffic and its part in the war, it will respect the aviation interests of small countries.

The State Department, and presumably delegates from the other countries having external air plans, want each nation to grant rights of free transit and technical landing to all others, at least until such liberties can be tried out for effect. Proposals that airmen of one sovereignty may fly over territory of another, without the latter's knowledge or consent, are not taken seriously.

Though the nations try to reach legal agreements, the contest for position in world air trade will be continuous and determined, and success will always be a measure of economic and military strength.

CAB's Route Hearings Seen as Long Grind

While the 55-nation conference tries to form a world airline pattern, the CAB continues hearings on a huge backlog of applications for American flag foreign routes. To save time the Board consolidates the applications in geographical groups for hearing purposes. Hearings recently were completed on a group of applications, by airline operators and by steamship companies, to fly from the West Coast to Hawaii.

A group of 16 applicants for U. S.-Latin America routes has been heard. Some of the applicants are big steamship companies: United Fruit, Grace Line, Moore-McCormack, Waterman, Atlantic, Gulf and West Indies, and the rest are airline companies.

Important issues are involved. Arguments by applicants and witnesses over chosen instrument or controlled competition foreign policy will influence Congress; the same is true of controversy on the demand by surface transportation for rights in the air; future relations between North and South America will be vitally affected by intercontinental air transport; and the future of the individual applicants is in the balance as examiners' recommendations are being formed. Hearings on the Atlantic route applications were started October 16.

It will be months before the Board can digest the large volume of data and opinion which will be submitted to it by the examiners. There will be opinions and orders on each applicant, but they probably will be handed down in groups as organized for hearing.

The Board will attempt to authorize routes, under a policy of controlled competition in accordance with present law, on the pattern of its recently proposed U. S. flag world air map. The "interim" or temporary routes proposed by the State Department for liberated and other countries at the 55-nation conference, does not affect certificates to be granted by CAB, although the Board has issued, and may issue more, temporary certificates.

NA Opens Service Into N. Y.; Buys CW-20's

National Airlines has started operations from the South into New York, the second East Coastwise service, the seventh tenant at La Guardia Field, and the first at Idlewild, Long Island. NA will use the Eastern Air Line route temporarily, later moving nearer the shore. Lockheed Lodestars are being flown; other equipment is to become available. Both Eastern and National are applicants for extensions to Latin American countries.

George T. Baker, National president, proposes "cabin" class passenger fares one-third less than "first class." His company has ordered 16 Curtiss CW-20 transports (commercial version of C-46 Commando).



CRAFT-WITHIN-A-CRAFT

How Army Sikorsky helicopters are quickly whisked to other side of world is—literally—an "inside" story. Rotor craft is here seen being unloaded at India base after flight from U. S. in belly of Curtiss Commando. (Press Association photo)

Douglas Craft Accented In Airline Orders

Contracts for over $60,000,000 worth of Douglas DC-4's and DC-6's for postwar delivery to United Air Lines, Pan American-Grace, Eastern Airlines, American Airlines, Penn-Central, and probably others, has led some observers to believe that the airline system may standardize extensively on Douglas equipment after the war, just as it did in the '30's. Reduced cost of planes and parts is cited as an advantage of standardization.

The Army will use its influence toward apportionment of civilian aircraft production, so that numerous experienced producers will be kept intact for emergency. Manufacturers like Lockheed, Martin, Curtiss-Wright, Boeing, Fairchild, and others, who have up-to-date designs, will drive ahead for airline business.

Compete for "Gateways"

Each of several cities—New York, Miami, New Orleans, Dallas, Jacksonville, and others—have been claiming special merits as an air "gateway" to countries south of the border. Probably several of them will become ports of entry and departure for lines to the south.


Of course, airways do not actually need gateways, as highways and railroads and shipping lines do. When there is enough traffic between Dallas and Rio, for instance, airlines may go the straight way, without bothering with gateways. This is one reason why some authorities believe small aircraft will have the advantage over larger ones.

PCA and EAL Buy Planes

Pennsylvania - Central Airlines has contracted with Douglas for 15 DC-4 transport planes for delivery "within several months" after peace. Total amount of the contract is $15,000,000. PCA links nearly 50 cities in the industrial East, North, and South. Pres. C. Bedell Monro asserted that this order constitutes PCA's initial requirements for postwar expansion of routes and service, and that further addition to the fleet will be made as required.

Eastern Air Lines followed with announcement that it is making a $25,000,000 expansion of its fleet through pur-



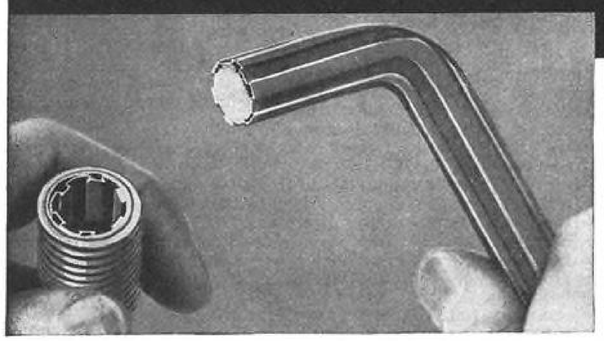

EASIER, FASTER ASSEMBLIES . . . greater holding power . . . convenient disassembly . . . are the reasons why Bristo Multiple-Spline Socket Set Screws are being used in tremendous quantities now that it is so important to specify the best. To accommodate greatly enlarged demand, manufacturing facilities have again been increased — this time by 25% — and further expansion is being planned.

THE TIGHTEST-SETTING SMALL SCREW ON THE MARKET

When the fastening point is awkwardly located or so small that it's hard to get at . . . or where vibration will be encountered . . . plan on using Bristo Screws.

The unique multiple spline design *gears* the screw to the key — for convenience in handling . . . and to utilize greater wrenching force without damage. The Bristo screw can be turned far beyond the point where an ordinary screw would burst or at least round out. Sizes as small as No. 4 wire can be set to withstand real vibration. Yet if adjustments need to be made, a flick of the key will loosen the screw.

Specified by leading aircraft and communications equipment manufacturers; ideal for electrical appliances, cameras, motor assemblies, instruments, etc. See other applications listed in THOMAS' REGISTER.

WHY "BRISTO" MEANS "TIGHTER"

Bristo: No expanding pressure; the key pulls the screw around

BRISTO MULTIPLE-SPLINE SOCKET SET SCREWS

GEARED TO THE KEY — FOR FASTER, EASIER, TIGHTER SETTING

The BRISTOL Company
MILL SUPPLY DIVISION
Mill Supply Division
152 Bristol Road, Waterbury 91, Conn.

chase of Curtiss CW-20's and Douglas DC-4's. Capt. Rickenbacker stated his line hopes to begin operation of the Commando-type 20's by the fall of '45 and the 4's as soon thereafter as possible.

Carrier Taxes Studied

CAB has appointed a 20-man advisory committee to assist in a study on multiple taxation of air carriers, under the chairmanship of Board Member Oswald Ryan. Committeemen were selected from the various activities related to the subject of taxation of air carriers. The study is being made pursuant to a Congressional act, following the Supreme Court's decision against Northwest Airlines in the Minnesota tax case.

ATC Operations of AA and UAL Revealed

Details meanwhile were revealed on American Airlines' global operations for the ATC. In the period Aug. 1943 to July 1944 alone, the line flew 11,634,309 mi. in transocean operations. Breakdown of this figure was North Atlantic, 6,078,425 mi.; South Atlantic, 2,296,165; and other oceans, 3,251,719. Passengers carried totaled 23,987.

Extent of the operations are indicated by the fact that in the period named there were 2,690 Atlantic crossings. Currently the company is averaging seven round trips daily over the North Atlantic.

A chronology was given by AA of operations since Pearl Harbor, also details on training assignments, modification services, research services, and advisory services.

Further, United Air Lines reported completion of its 1,500th flight across the Pacific carrying personnel and materials to the Far East war theater for the ATC. United record shows about 11,000,000 mi. flown over the 7,350-mi. route between California, Hawaii, and Australia since operations began late in '42. Two daily round trips are now flown with 20 Douglas C-54's furnished to UAL by ATC.

Average elapsed time for the westbound flight from San Francisco to Townsville, Australia, with stops at Honolulu, Canton Island, Tarawa, Guadalcanal, and Port Moresby, is 50 hr. Passengers have totalled 38,990; cargo, 6,434,619 lb.; and mail, 6,030,512 lb.

SAE Meeting Considers Airliner Improvements

Transport aviation got the accent in the Oct. 5-7 SAE National Aircraft Engineering & Production Meeting in Los Angeles. Leading off were two companion papers, one by E. F. Burton and Carlos Wood of Douglas, and the other by Reagan Stunkel of Lockheed. The subsequent discussion was dominated by airline representatives whose theme was that transport plane designs still leave much room for improvement.

Airline spokesmen contended that past designs almost invariably fell short in at least one of these basic factors—safety, speed, comfort, and cost. Review by operator representatives prior to production was advised. Fire detection and control was specified as deficient.

It was indicated that experience proved 13 hr. utilization as satisfactory because weather, scheduling, traffic necessities, and customer whims will limit utilization to approximately that time. One line's experience pointed to an average of 1 man-hour per hour of flight per ton of weight as average maintenance time.

Later, a paper by Henry Dreyfuss, New York industrial designer, contended that big planes operating over long routes would have walk-around and also recreational space. Countering was argument that fewer such "frills" and greater speed would better solve passenger boredom and fatigue problems.


Postwar Pickup Plane Features Outlined

Basic features for the design of a combination passenger-pickup plane were pointed out recently by A. B. Schultz, chief engineer of All American Aviation. Company has been investigating the possibilities of adapting the service to include passengers, the plan being to make landings only when necessary for the accommodation of passengers; otherwise the mail and express would be picked up and delivered in flight as it is now.

Gross weight of the airplane should be about 15,000 lb. to provide for 12 passengers and baggage, pilot and copilot, 300 lb. of through express, 200 lb. of pickup equipment, 1,500 lb. of pickup cargo capacity, and 500 mi. range with the customary reserves. Cruising speed is put at 175 mph. Controllability at 80 mph. would be desirable.

It may be necessary to obtain engines capable of 100 percent boost for emergency takeoff, either by water injection or other means. Addition of rocket clusters in the tail of each nacelle for emergency boost requirements, operable in case of critical engine failure, may be a not-too-distant solution to this problem.

Other features were detailed by Mr. Schultz in his paper read before the Institute of the Aeronautical Sciences in the recent Air Transport Meeting in Washington, D. C.

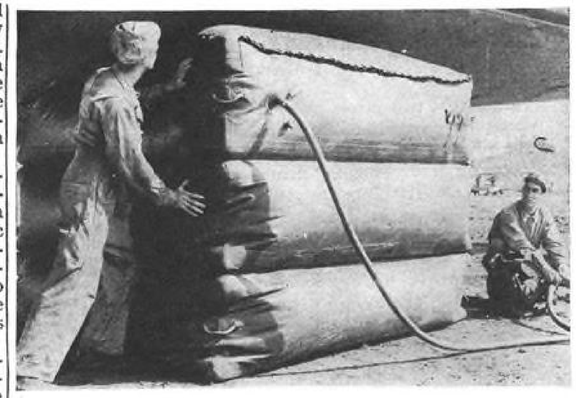

UP ON AIR

Giant pneumatic pillow jacks, new addition to standard AAF equipment, are used to lift airplanes which have made crash landings on soft ground. Improving on original German idea, ATSC devised 6½-ft.-sq. bag which can support 12 tons. Only two are needed to lift most planes, while B-24 takes four, and B-29 eight. Sets of three bags with gas-engine-driven blower weigh 220 lb. (ATSC photo)

★ CROSS COUNTRY ★

UAL is circulating an illustrated questionnaire booklet to its patrons asking suggestions in planning such things as cabin interiors and facilities of its postwar DC-4 and DC-6 airliners. Company is also putting out a new 100-page guide for use of its traffic and reservations personnel and to replace numerous timetables and reference books.

Northwest Airlines has completed installation of a system-wide private line teletype circuit linking all stations on its Chicago-Pacific Northwest routes.

PCA has adopted new insignia, with initials PCA on a winged background and carrying accompanying slogan, "The Capital Airline."

AA's traffic planning committee has devised new speedy system of handling seat reservations on company's routes between N. Y., Boston, and Chicago, and Chicago and Ft. Worth. Called "Sell & Record," method has cut down time between request and confirmation on seats, frequently to record time of about 30 sec., whereas old way often took 2 hr.

Air Transport Assn. of America has released 6th edition of Little Known Facts, containing data on airline operations since industry's beginning in 1926. Information formerly withheld for security reasons is now included.

Goodyear Aircraft Corp. in statement to CAB, calls for further consideration of lighter-than-air craft in planning future scheduled airline operations on transocean routes.

Business research department of Curtiss-Wright has issued study titled, "Air Transportation in the Immediate Post-War Future", dealing with equipment requirements, international air traffic, transportation rates, and discussing postwar surplus plane picture.

An ATC Douglas C-54 recently was flown from San Francisco to Honolulu (2,415 mi.) in 10¾ hr. Good tail winds helped clip full hour from old time.

PAA announces establishment of regular airmail, passenger, and cargo service between Miami and Leopoldville, Belgian Congo. Twice-monthly round trips are scheduled. One-day round-trip Clipper service between Miami and San Juan, Puerto Rico, has also been inaugurated, and new night flights have been announced between Brownsville, Texas, and Mexico City, linking N. Y. with Mexican capital in cooperation with EAL. Panair do Brasil, nationalized affiliate of PAA, has doubled night flying schedules between Rio de Janeiro and Sao Paulo.

Recent applications by PAA to CAB include requests for routes and extensions to reach Tokyo, Shanghai, Paris, Athens, Rome, Moscow, Stockholm, and Oslo, and also an extension to Calcutta, India.

Port of N. Y. Authority has recommended adoption of a pattern of eight basic direct one-carrier air routes between N. J.-N. Y. port district and points in South America. Port Authority states distances via routes now flown range from 7 to 45 percent greater than suggested routes.

DC-4's and DC-6's recently ordered by AA, Panagra, and UAL will be equipped with basic 13-ft. Hamilton Standard three-bladed Hydromatic propellers.

Dept. of Commerce and Edward S. Evans Transportation Research have issued a survey on postwar air transport cost and markets for lettuce.

Recent developments in field of air transport were disclosed in papers presented at I.A.S. Air Transport Meeting in Washington, D. C. Some of subjects: Feeder line operations, use of cargo gliders, developments in air traffic control, and review of aerodynamics of flight load factors in relations to safety regulations.


TWA's Boeing Stratoliners will go back into company's service again as soon as modifications on planes are completed at Boeing's Seattle plant. Returned by ATC, refinished 307's will

There's More to Stainless Tubing than Analysis

In analysis, two pieces of stainless tubing are alike. But there the likeness stops. Plus values resulting from long experience then take over. Since Carpenter first pioneered in developing Welded Stainless Tubing, we have worked with engineers to help improve processes and products. The accumulated "know how" is yours for the asking. We'll be glad to help whenever you run up against trouble in selecting or fabricating corrosion and heat-resistant material.

For this heating coil, Carpenter Welded Stainless Tubing met three requirements: 1) coiling light walls on close radii, 2) resistance to corrosion, and 3) availability from stock.



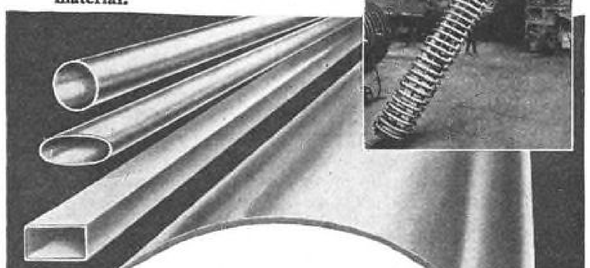

Apply these advantages of Carpenter Welded Stainless Tubing where they will do the most good on your particular job.

- Uniform tube walls — no thin spots
- Easy to bend, expand, weld, etc.
- Extra strength, light weight
- Each length 100% hydrostatically tested
- Meet Army-Navy Specifications
- Cold rolled surface quality, inside and out
- Lower fabricating cost
- Wide range of analyses, sizes and shapes
- Excellent resistance to heat scale
- Readily available from distributors' warehouse stocks



Send For This Handy File Folder containing helpful information on types of analyses, physical properties, sizes, gauges, shapes. Just drop us a note on your company letterhead.

THE CARPENTER STEEL CO.
WELDED ALLOY TUBE DIVISION
KENILWORTH, N. J.

Carpenter
WELDED
STAINLESS TUBING

have Flying Fortress wings, landing gear, tail surfaces, and newer, more powerful engines.

Springfield Feeder Air Line has submitted application to CAB for service covering Springfield, N. Y. C., Boston, Albany, Providence, Hyannis, and Hartford. Arrangements have been made to use La Guardia Field as the N. Y. terminus.

Air Express Div., REA, reports that total of 250,970 shipments were handled for nation's commercial airlines in the first seven months of this year, a gain of 12.3 percent over same period last year. Number of shipments in August totaled 37,293, a gain of 10.9 over previous month.

★ FLIGHT OPERATIONS ★

UAL flew 43,865,000 revenue passenger-miles during September (a 29 percent gain over same month in 1943), and 2,185,934 ton-miles of mail and express were handled. Company is currently flying 95,000 mi. daily.

Braniff Airways flew a total of 491,035 revenue miles and 24,236 revenue passengers in August, completing 99.08 percent of all flights scheduled.

Northwest Airlines carried an estimated 18,755 revenue passengers in August. Mail and express totaled 665,460 lb.

PCA in Aug. flew a total of 53,550 passengers, a 10 percent increase over same month in 1943, and 1,075,807 lb. of airmail and express were carried.

Continental Air Lines totaled 2,544,612 passenger-miles in August. Load factor for all routes averaged 92.9 percent, an increase of 1.4 percent over July.

PAA's fleet of flying boats transported 726,172 lb. of mail and express in and out of La Guardia Field during August, termed a 300 percent increase since the first of the year. Latin American division registered a 33 percent gain in passenger-miles flown and a 155 percent increase in express ton-miles during 30-day period, passengers numbering 24,346, a gain of 25 per cent over same period in '43.

National Air Lines has carried 527 passengers on its Florida, New Orleans-N. Y. C. route since opening of this service last month. Load factor between N. Y. C. and Jacksonville has been 98.92 percent. Flying nonstop, Florida-N. Y. C. time of 3 hr. 50 min. was set by NAL plane.

EAL states it has completed two consecutive months of operations with 100 percent efficiency (June and July). In domestic operations, 43,000,000 revenue passenger-miles were flown. Cargo planes are averaging 20,000,000 lb.-mi. a day carrying express and mail.

Hawaiian Airlines reports 26.93 percent gain in first six months of 1944 over same period last year in handling air cargo. Large portion of increased poundage was made by shipment of vegetables and fruits to Honolulu markets.

Western Air Lines had an 8.70 percent gain in express cargoes flown in first six months of 1944 on its Calif.-Canada system, recording 265,867,635 lb.-mi.

The Southwest Pacific airline operated by DAT (Directorate of Air Transport) in support of forward fighting zones flew 16,039,301 mi. during first half of '44. Some 350,000 high priority passengers were carried, with carried, with 1,651 patients evacuated from New Guinea to Australia, and 58,000 tons of cargo were hauled.

★ ALONG THE APRON ★

UAL's pilot training school in Denver has graduated 352 men since Pearl Harbor to handle company's fleet. Depending on pilot's previous experience, course takes from 60-110 days. About twelve men graduate each month and are assigned as first officers on UAL system.

5,000 AAF, Navy, and RAF avigation cadets have graduated from training section run by PAA from Aug. 1940 to Sept. 1944, when school was closed by War Dept. Record is 2,079,000 mi. flown with perfect safety.

United Flying Service, Vail Field, Los Angeles, is reported selling an average of a plane a day in addition to affording service and overhaul facilities. From 100 to 125 ships are stored at field and many have been sold for owners.

Some 280 Tennessee high school, college, and university teachers are being prepared to teach aviation under a scholarship plan by state's Bureau of Aeronautics covering equivalent of 12 wk. of ground school and 10 wk. of dual flying.

Flight instruction for civilian students at Alabama Institute of Aeronautics, Tuscaloosa, has been resumed with termination of War Dept.'s flight training contract with school.

State Departments of Education of Wisconsin, Illinois, Colorado, California, Connecticut, and of Pennsylvania have recommended flight experience of 4-hr. dual for each pupil in local high school aviation classes.



EMULATES MAPLE SEED

Called the "Sky Hook," new container tested by ATSC for air delivery of emergency supplies features airfoil arm which spirals it vertically to earth, enabling more accuracy than drop by parachute. Blade, approximately 1 ft. by 3 ft., is flat wooden frame covered with airplane cloth. Speed of descent is 35 ft. per second. Bulbous plastic container holds 65 lb. of supplies, might carry mail in postwar use. (ATSC photo)



Now...

Aerodynamic Braking by

REVERSE THRUST

Aerodynamic braking, another first by Curtiss, brings to the science of flight a new and significant development. The propeller, long the source of forward thrust in aircraft, now provides thrust in reverse to reduce the landing roll of the airplane smoothly and surely, regardless of ground friction. Aerodynamic braking, like many other features, is inherent in the versatile Curtiss design.

Features of Aerodynamic Braking

1. Shorter landing roll
2. Greater safety of dual braking system
3. Smoother deceleration
4. Greater safety on slippery runways
5. Shorter taxi time
6. Unassisted ground handling
7. Reduced tire and brake wear
8. Lighter brake system possible

CURTISS ELECTRIC PROPELLERS

Curtiss-Wright Corporation · Propeller Division




● There are more than 25 precision-made parts in the average Multiple Circuit Electrical Connector. When assembled, they perform their function—that of making or breaking many electrical circuits simultaneously—with the utmost simplicity and efficiency. Such simplicity in operation is the end result of years of research, many refinements and great skill in manufacture. The Breeze Multiple Circuit Electrical Connector reflects in the efficiency with which it does its job, the experience which went into its production—the background which has made Breeze a leading producer of many different types of aircraft and electrical accessories.



Socket construction features spring-loaded contact for positive electrical connection with pin.



Both pin and socket feature spring snap for ease of assembly in housing insulators after soldering.

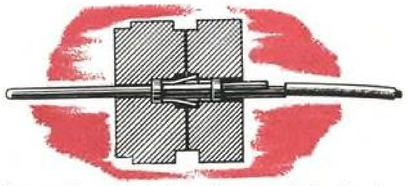

Cross-section illustrating how contact pin is snapped into place after soldering on lead wires.

Breeze BREEZE MARK
CORPORATIONS, INC.
NEWARK, N.J.

PRODUCTION FOR VICTORY — PRODUCTS FOR PEACE

British Voice Worries On Postwar "Go-Aheads"

. . . Look to air parley for clarification . . . "Spits" continuing.

Virtually on the eve of the 55-country air parley scheduled to open in America Nov. 1, British air officials stated that England was first in the field and was resolved to stay there, the reference being to the question of Britain's postwar air transport position.

Lord Brabazon, whose committee proposed a number of postwar aircraft all now termed obsolete in concept, contended in return that the United States was determined to keep the upperhand and that therefore U. S. plants had been given the go-ahead on new airliners. (Such a development, however, has not been confirmed in America.)

In contrast, said Lord Brabazon, British airline operators are not getting even the promise of a machine of the right quality, and British factories have been stopped from developing any new types.

Look to Air Parley For Clarification

British belief that the U. S. is jumping the gun on postwar aircraft construction appears to have been nurtured by prolific American announcements regarding new "super" airliners. Further, the recent demands by some members of Congress that the U. S. should take over various bases throughout the world have broadened British apprehensions over America's postwar air aims.

Right-thinking persons on both sides are hoping that the new parley will clarify the many questions and alleviate suspicions arising from the various semi-official announcements.

"Spits" Continuing

It is stated that production is continuing on the Spitfire, though the last of the more than 10,000 Hurricanes (pictured page 237, Oct. Aviation) has now been turned out. The latter craft is being replaced by faster Typhoons and Tempests. (For photo of latest Spitfire — Mark XIV, powered by 12-cyl. Griffon engine and turning 5-blade prop—see page 223, Oct. Aviation.)

★INTERNATIONAL BRIEFS★

Netherlands Air Force has been made an independent organization (preparatory to the return to the homeland) under the command of Rear Adm. J. W. Termytelen.

New Zealand has discontinued sending its cadets to Canada for training in the Empire Air Training Program. It will now handle all trainees at home.



NAZIS' PAPER GAS TANK

Adopted by all belligerents to add extra range to their warplanes, droppable fuel tanks have been developed in widely differing designs and constructed of all manner of materials. This Nazi tank, found on Brussels airfield taken over by RAF, is made of compressed paper. Note stabilizing vane at tail. (British Combine photo)

WORLDATA . . . . . By "VISTA"

Further details have been received on the new air route which the Qantas Empire Airways has been operating across the Indian Ocean from Australia to India. Known as the Indian Ocean Service, the line has been flown since June 1943 with Catalinas. Involving a non-stop flight of 3,563 mi., the distance admittedly is the longest regularly scheduled hop in the world. It's covered in around 27 hr. by the "Cats," which take off with a gross weight of some 35,000 lb., including 16,000 lb. of fuel. They are equipped to carry three passengers and 500 lb. of mail and freight.

Passengers who have made the trip are initiated into the "Rare and Secret Order of the Double Sunrise" to remind them of the more than day-long flight. A landplane service is to be inaugurated with a four-engine type plane to be known as the "Kangaroo". Longest hop with this land craft will be 3,156 mi.

Some commercial airlines in Europe have started operating again, after a 4½-yr. lull, getting the jump on pessimists who foresaw endless delays. The British are operating between London and Paris; Air France has reopened its routes from Paris to London, Algiers, and Tunis, besides a connection between Bordeau and Marseilles; and an airline presumed to be British has started regular services between Rome and Lisbon via Gibraltar.

Further information on the Conference of International Air Traffic Operators (June Aviation) indicates that this CIATO is the brainchild of old IATA members. It was formed when meetings to discuss postwar problems could not be held legally under IATA auspices. While the conference still has not received the support of countries with major airlines, such as England, America, and Holland, its aim appears of great value in rejoining the scattered and demoralized smaller international airline operators.

Resolutions adopted at the first general CIATO meeting: 1. That civil airline operators shall resume their activities as soon as possible after the end of hostilities, without prejudice to continuance of air transport command type operations. 2. That these operators should be enabled to obtain transports sufficient to bring their fleet to prewar levels. And 3. That the United Nations should set up a committee, with the airline operators represented, to deal with question of making such craft available.

Criticism has appeared in English trade magazines concerning American aircraft publicity, argument being to the effect that the releases claim everything turned out is the "fastest, biggest, and bestest in the world".

Britain's Gloucester jet-propelled fighter (pictured on page 213, Oct. Aviation) now is stated to be in full production. Reportedly it is better than the German jet craft.

Avro has petitioned the British Air Ministry for permission to start building the prototype of its 125-passenger airliner.

The Japs state they have put a new wooden bomber into service production, and they claim that it surpasses the British Mosquito.

French patriots are said to have saved several of the huge six-engine flying boats built in Vichy France. Their hope is that they may be used to start an early trans-Atlantic service.

BOAC is now operating 140 aircraft, a 30 percent increase over the 109 which were in service in Jan. 1943.

Two new German planes are reported by Britain's magazine, "The Aeroplane," both rumored to have been specially designed to take Hitler to Japan. They are the He-178 and the six-engine Ju-390.

And Britain's magazine "Flight" reports that the Boeing Fortress Fighter, earlier mentioned by the Nazis, is known as the B-40 and has 28 50-cal. machine guns and two 20-mm. cannon.

Captain Johnson, American ace, has shot down several of the new German Me-209 fighters, which are equipped with a 12-cylinder in-line engine, a 30-mm. cannon, and two 13-mm. machine guns.

Bolivia has fined the German Lufthansa for smuggling 250 lb. of cocaine to Germany.

Photo of a Barracuda taking off from a British carrier shows an accelerator gear carriage (running along slot in flight-deck) on which plane's left main wheel rides during takeoff.

AUTOMATIC MODULATION
by WHITE-RODGERS

White-Rodgers modulating temperature controls and Servo Actuators provide the safety of automatic local or remote control and assure greater freedom for the pilot in applications involving the control of:

Cabin Temperature
Anti-Ice Temperature
Carburetor Air Temperature
Carburetor Mixture
Carburetor Throttle


Authorized manufacturers concerned with the above or similar applications may secure engineering data on request.




● Compact temperature controlled actuator especially adapted for anti-ice applications. Arm rotation adjustable within range of 30 to 120 degrees. Torque output up to 75 inch-pounds.



● Modulating temperature control used for regulating carburetor air temperature.



● Servos available in several types for applications involving additional power requirements.

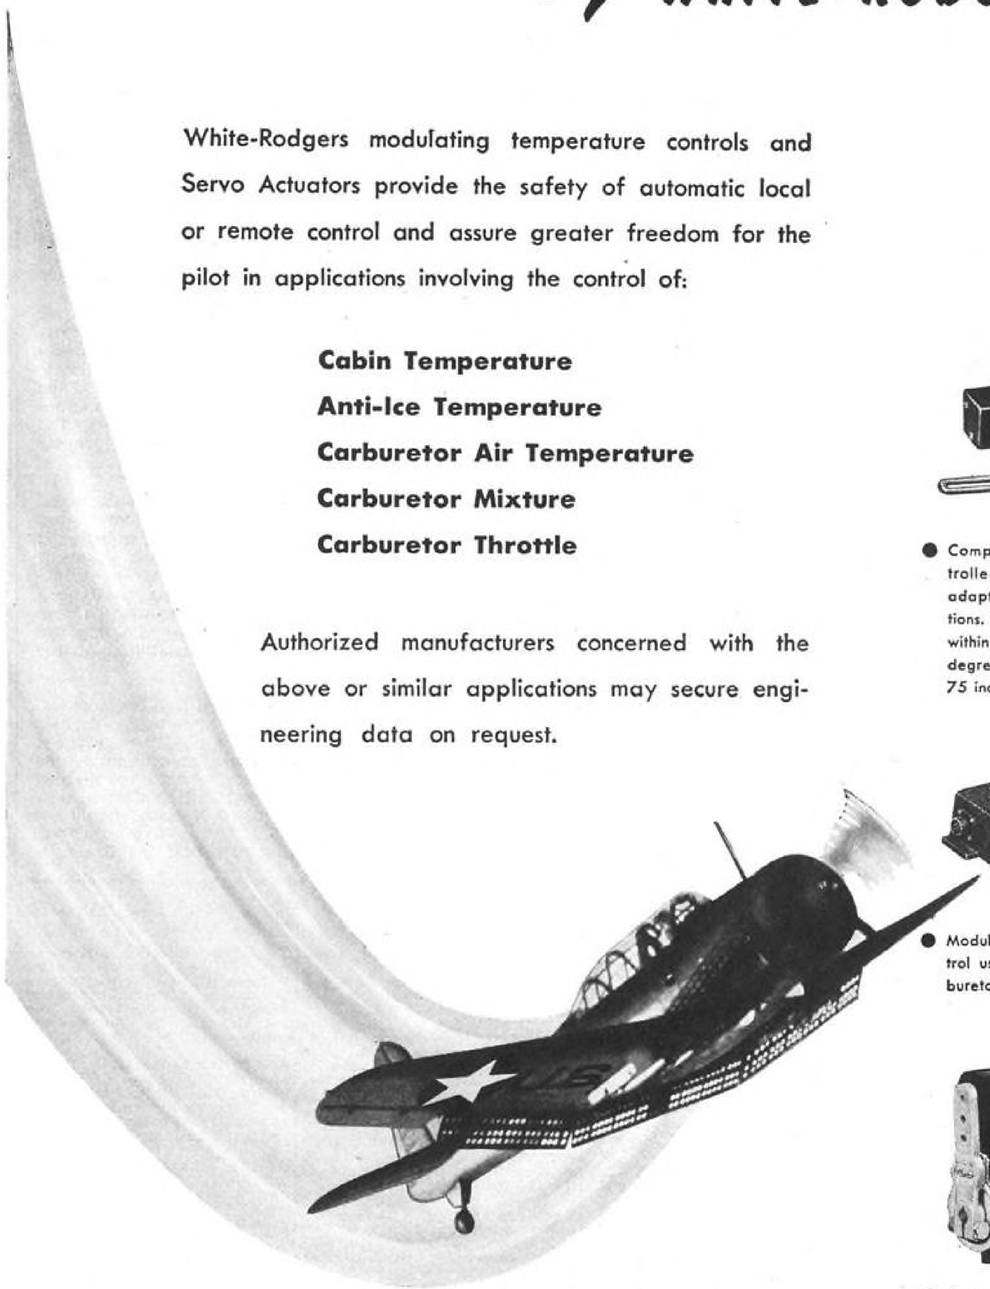

WHITE-RODGERS ELECTRIC CO.
SAINT LOUIS

Mid-Continent Airlines has terminated its Army air cargo route contract in the Middle West. Net profits for the seven months ended July 31 were $123,056 against $103,744 in the like 1943 period.

Air Associates reports that a renegotiation agreement recently executed on operations for the fiscal year ended Sept. 30, 1943 reduced net profits after taxes by $552,902. Revised net income for the period is $582,648 or $4.32 a share. This compares with net income of $448,401 or $3.32 a share, in the preceding year.

Republic Aircraft owns inventory materials valued at well under $500,000, despite sales of $220,000,000 in the first half of 1944, according to company officials.

Northwest Airlines reports net earnings of $517,789 or $1.45 a share for the year ended June 30 compared with net earnings of $300,092 or $1.28 a share in the previous year. A postwar reserve of $100,000 was set aside from 1944 earnings, according to Pres. Croil Hunter.

Liberty Aircraft stockholders have approved a two-for-one split in the common stock. The company also is issuing 80,000 shares of $1.25 convertible preferred stock of $20 par value and will apply part of the proceeds to retirement of a $1,000,000 bank loan. It is also planned to acquire all or part of the plant facilities now under lease from a government agency. Unfilled orders on July 31 were $13,200,000. Sales for the nine months ended Aug. 31 were $16,600,000 against $14,600,000 in the like 1943 period.

Dividends: Northrop Aircraft has declared two dividends of 25c. each on the A and B stocks payable Oct. 17 and Jan. 1, 1945. This represents initial payments on the Northrop stocks. . . . McDonnell Aircraft Corp. paid a $1.50 preferred dividend in October. . . . Lockheed Aircraft declared a 50c. dividend in September, while Beech Aircraft paid a $1 dividend on Oct. 26.

The Aviation Corp. reports net income of $3,199,871 or 49c a share for the nine months ended Aug. 31 against net income of $2,810,486 or 15c a share in the like 1943 period. Earnings are subject to final renegotiation settlement.

Ex-Cell-O Corp. has acquired 93,972 shares of the Fuel Injection Corp. at 40c. a share. The latter company has 100,000 shares outstanding, and it is the intention of Ex-Cell-O to purchase the remaining shares.

Lockheed Aircraft Corp. has negotiated a loan of $175,000,000 with 15 large commercial banks, according to C. A. Barker, Jr., treasurer. The loan, described as a V credit, was arranged to meet current operating expenses and termination needs. Last year the company increased its line of credit with the banks from $60,000,000 up to $105,000,000. Other large credits negotiated by the industry include one of $200,000,000 by Consolidated Vultee Aircraft Corp. and one of $125,000,000 by Sperry Corp.

North American Aviation, last of the big aircraft concerns to issue its year report, had net earnings of $6,790,323 or $1.98 a share for the fiscal year ended Sept. 30, 1943 as compared with net earnings of $7,370,626 or $2.15 a share in the preceding year. Sales were $509,139,600 against $253,226,100 the year before. Earnings for 1943 were reduced by $11,328,000 through an agreement reached with the Price Adjustment Board. A sum of $5,000,000 was charged off to contingencies, compared with $1,530,000 the previous year.

Grumman Aircraft does not plan a split-up in its capital shares, company officials say, despite the persistent Wall Street rumor that something of that nature is brewing. The increase in authorized capitalization from 600,000 shares to 3,000,000 shares approved by stockholders earlier this year was for the purpose of providing more working capital. when, as, and if needed.

Piper Aircraft declared an initial common dividend of 12½c a share payable Oct. 25. The company, whose stock has recently been listed on the N. Y. Curb Exchange, produced around 2,250 planes in the year ended Sept. 30 besides non-aircraft products for the Signal Corps. Unfilled orders included 1,832 planes for the government.

Aircraft Accessories Corp. reports net earnings for the year ended Apr. 30 of $1,172,247 or $1.64 a share against $741,433 or $1.21 a share in the like 1943 period. Sales were $38,758,829 against $24,972,460.

Ryan Aeronautical Corp. reports a renegotiation settlement for the year ended Oct. 31, 1943 whereby $73,000, after tax credits were deducted, was refunded to the government. The $73,000 has been charged to a contingency reserve provided for the purpose, according to Pres. T. Claude Ryan.

All American Aviation reports net income of $238,587 or 78c. a share for the year ended June 30 against net income of $27,689 or 11c. a share in the preceding year. Pres. Halsey R. Bazley told stockholders that negotiations are under way with both domestic and foreign airlines for use of the company's air pickup equipment.

ADDING IT UP.....By RAY HOADLEY

Termination loans. Bankers report that war contractors are in no hurry to apply for the new T-loans now available. One reason is that the government is settling terminated contracts somewhat more rapidly than it did a few months ago. Another reason is that the T-loan procedure is so simple and workable that contractors feel that they are safe in watching developments a little longer before making any advance commitments for such loans. The Federal Reserve Bank, however, has warned banks to be prepared to make large numbers of these loans within a few weeks after V-E Day.


Airline Earnings. The improvement in domestic airline profits that showed up towards the end of the second quarter was accelerated in the third quarter to such an extent that trade circles expect results for the year will be at record levels for some companies and compare favorably with 1943 in almost every case. The airlines still need more equipment as cross country traffic increases in proportion to stepped-up operations in the Pacific theater.

Financing. Wall Street bankers expect that some of the 28 companies which have evidenced an interest in personal plane production will be seeking additional capital in the near future to finance production of the new models they hope to put on the market as soon as possible. It will be the first bit of financing of this type in several years, but bankers expect it will be done in the customary method of issuing new stock. The small manufacturer, however, will find it somewhat easier to secure bank loans than he did before the war.

Stock Market. Publicity given to recent large equipment orders by several airlines proved the spark that set off the long delayed rise in the aircraft stocks. And the big volume buying that came into the market and shot several issues up to new high levels for the year indicated that all Wall Street had suddenly realized that these stocks actually have been selling at only slightly more than their net working capital per share. Yet with all this new buying the aircraft stocks were selling at less than 60 percent of their highest price in 1938. The funny thing about it is that after five years of huge war demand for planes, prices begin to rise just as the companies begin to get sizable cutbacks.

Tax Plans. Nearly all the postwar tax plans that we have scanned provide considerable relief to corporate stockholders, either through abolishment of excess profits taxes or credits to a company or its stockholders for dividends paid out. It appears that a definite pattern for early relief to aviation stockholders will emerge from all these suggestions.

Transfer of materials. Industry officials feel that marked progress was made towards orderly reconversion in the aircraft industry when the Treasury Department, after long hesitation, gave its okay to the plan whereby company-owned excess materials can be sold to the government at $1 and inventory losses entered for tax purposes. It's the first real break the industry has got from the tax people in a long time, and it will mean substantial savings to the manufacturers if they can register their inventory losses in a year of really good earning power such as 1944.

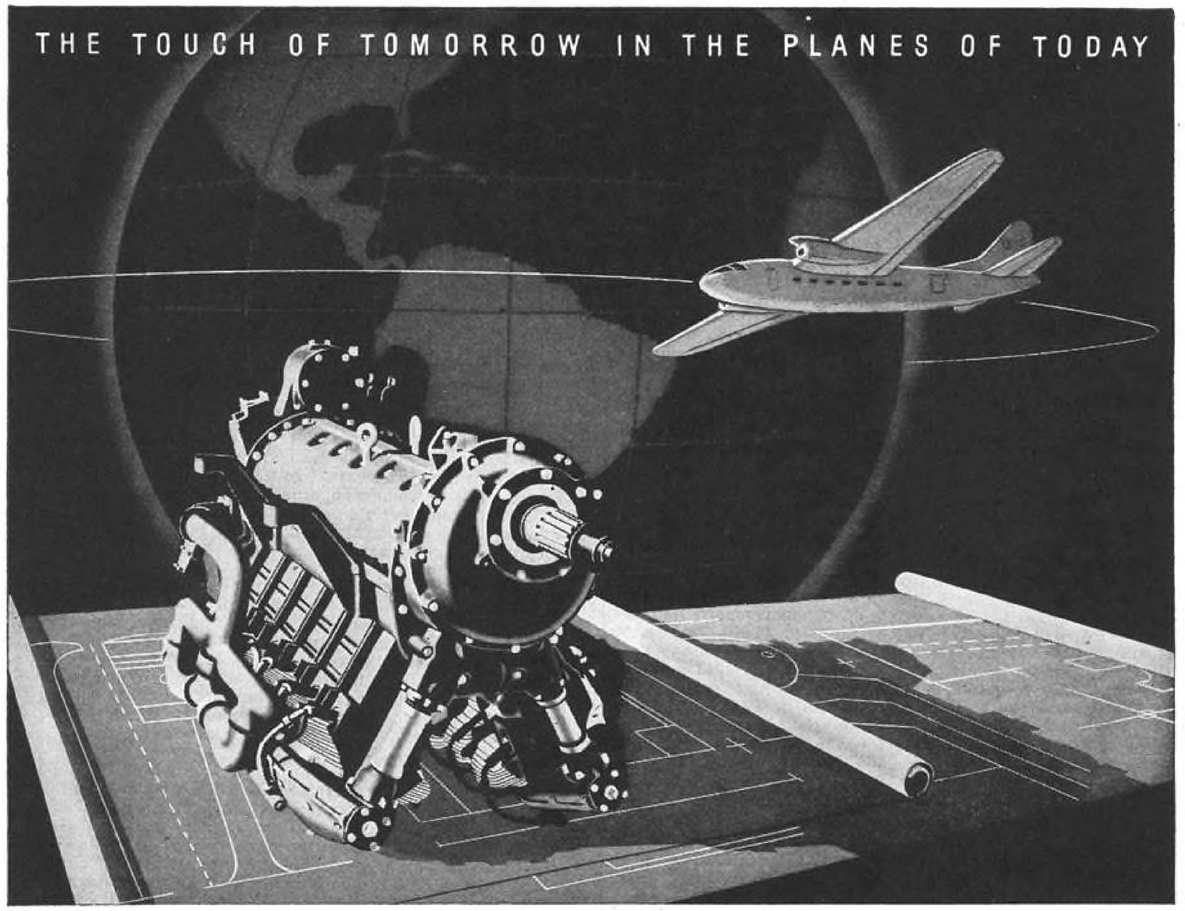

RESEARCH PAYS a 30,000 Mile Bonus

Clean cut and durable as a gem, Ranger engines deliver their dynamic punch under the toughest year-'round flying assignment in the book.

Normally, engines in service are "pulled" for major overhaul after 600 hours. But Rangers have consistently paid a service "bonus" up to 50 per cent. It's common for a Ranger engine to reach the *900-hour* check point, purring sweetly, delivering full power . . . 30,000 and more *extra* miles of flight.

Ranger-powered planes cut through the rugged cold of Canada, the dust-laden heat of deserts; they fly in Mexico, throughout South America—and in South Africa. They do their flight job, sturdily, under all sorts of field conditions.

The twelve cylinder Ranger, for example—aircooled for weight economy, inverted for a better field of vision, inline for better streamlining—logs hours and hours of time in rigorous wartime operations. Yet Rangers continue to pay a bonus—hundreds and hundreds of *extra* hours in the air.

In use only on military planes today, Ranger engines on commercial airline and private planes tomorrow will provide those extra hours of service for efficient and economical operation.

Fairchild research—the constant quest for better materials, better methods, better results—has made this Ranger bonus possible. It springs from Fairchild engineering knowledge and experience that lends the "touch of tomorrow to the planes of today".

BUY U. S. WAR BONDS AND STAMPS

RANGER AIRCRAFT ENGINES

Division of Fairchild Engine and Airplane Corporation • Farmingdale, Long Island



JOHN C. LEE, former manager of the Aircraft War Production Council, West Coast, has been elected president of Menasco Mfg. Co., succeeding John E. Royal, who has resigned due to ill health. A major producer of hydraulic landing gear struts, Menasco builds for P-38's, '47's, and '51's. (Harris & Ewing photo)



A. G. KINSMAN, for some years head of Northwest Airlines' passenger traffic department, has been named to new administrative position of western traffic manager, with headquarters in Seattle, as part of NWA's program of development of Pacific Northwest as air transportation gateway to Alaska and the Orient.



GEORGE R. ACHESON, commanding officer of a heavy bombardment wing in Italy, has been advanced from colonel to brigadier general. He began his Army career as a private 19 yr. ago, serving as mechanic at France Field, Panama, before returning to the U. S. for flight training which led to commission in 1927.



WILLIAM A. MARA, former director of personal aircraft sales for Convair, has joined Bendix Aviation Corp. as staff executive to supervise and coordinate Bendix product developments concerned with personal planes. Mara helped late Eddie Stinson organize his company in 1925 and then concentrated on sales.



A. A. KUCHER, director of research of Bendix Aviation Corp. and chairman of its long-range planning committee, has been named company vice-president. In aircraft engineering work during World War I, he later was associated with Westinghouse and General Motors, leaving latter in 1942 to join Bendix.



RALPH WALL has been named assistant sales manager of Pacific Div., Bendix Aviation Corp. A member of Division's sales department for past six months as liaison sales engineer, he now assumes charge of all current military sales. He formerly was with Lyon Metal Products.



MYRON B. GORDON, formerly vice-president and general manager of Wright Aeronautical Corp. and a vice-president of Curtiss-Wright, has been elected a director and vice-president in charge of operations for Fairchild Engine & Airplane Corp. He had been Wright's v.-p. and g.m. since 1935.



J. HOWARD BLAKE has joined Glenn L. Martin as director of market research for non-aeronautical divisions to coordinate commercial development of that company's projects outside aviation field. Prior to joining Martin he had been engaged in market research for N. W. Ayer & Son.



CLARENCE L. RIEGAL has been elected secretary and assistant treasurer of Luscombe Airplane Corp., Trenton, N. J. Prior to joining Luscombe he had been assistant district auditor for General Electric in New York and headed N. Y. Credit Men's Assn. (Affiliated Photo-Conway)



JOHN M. BEARDSLEE has been appointed manager of CAA's new 9th Region in Hawaii, where he will direct some 200 CAA employees. For past year he has been chief of Airways Engineering Branch of 6th Region, headquartering in Santa Monica. Earlier he served in Alaska. (CAA photo)



JOEL WHITNEY, director and manager of the Ryan Aeronautical Institute, has been named chairman of San Diego section of Institute of Aeronautical Sciences, succeeding Ernest G. Stout of Convair, who is now out of country on a special mission. Whitney was formerly vice-chairman of local chapter.



CAPT. ROBERT SAILORS, UAL pilot flying ATC Alaska runs, set record of 6 hr. 43 min. between Anchorage and Seattle, then followed with record of 7 hr. 15 min. for Anchorage-Portland run with hospital cases being evacuated from Alaskan area. Both runs were non-stop flights made in Douglas C-47. (UAL photo)




LEONARD J. POVEY, former vice-president in charge of flight operations for the Embry-Riddle School of Aviation, has taken a military training liaison position with Fairchild Aircraft Div. at Hagerstown, Md. Povey went to Cuba in 1934 to organize Cuban Air Force, personally training most of early pilots.



LAURENCE E. COONEY has been appointed vice-president and general sales manager of The Austin Co. With the firm since 1919, when he was assistant to general construction manager, he was project engineer on Bell Aircraft's construction from 1941 to '43, then Cleveland district sales manager.



HENRY E. MOOBERRY has been named assistant to the president of United Aircraft Corp., headquartering at United's East Hartford offices. He joined company's public relations staff in '42, following 11 yr. with the AP, and was made assistant director of advertising and publicity a year ago. (John Haley photo)

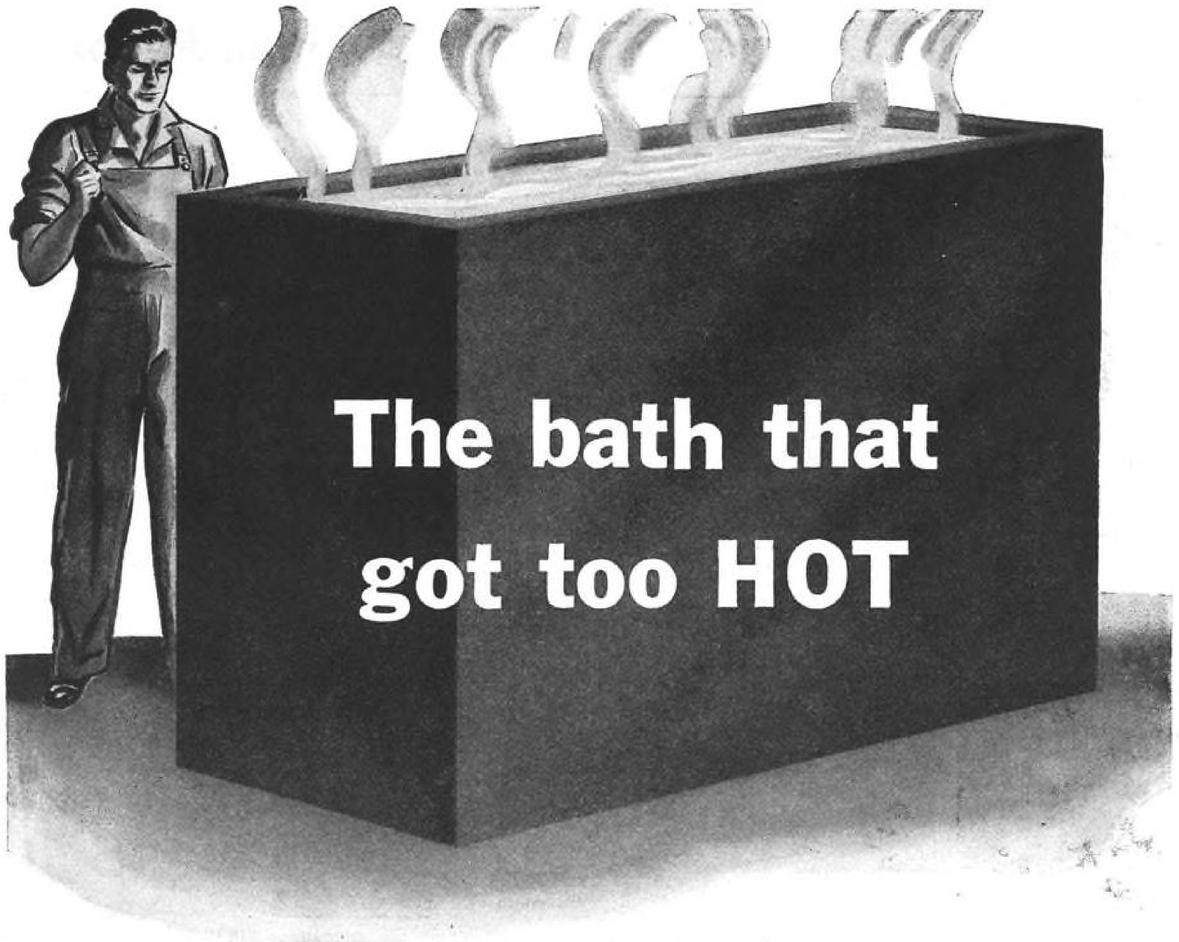

. . . for the thin skin of aluminum oxide

Corrosion and abrasion are enemies of aluminum just as rust is an enemy of steel. To make aluminum corrosion and abrasion resistant, a thin protective film of aluminum oxide, approximately one ten thousandth of an inch thick, is applied electrolytically in an anodizing bath.

To produce a satisfactory oxide coating, it is necessary that the temperature of the bath be kept within certain limits. However, because of the large amounts of electrical energy used in the anodizing process, tank temperatures tend to rise dangerously, resulting in an inferior oxide coating.

This condition is remedied through the use of General Electric Industrial Cooling Equipment which, by maintaining a constant bath temperature, makes possible a superior anodizing job.

This is just a single instance of the many ways in which G-E Industrial Cooling Equipment is contributing to better, faster, more economical production techniques. These new techniques . . . ready to assist you *now* in war production . . . will be available for any commercial or industrial application once the war is won.

An application digest concerning the use of G-E Industrial Cooling Equipment in the anodizing process is now on the press. For your free copy, write—on your business letterhead—to:

General Electric Company, Air Conditioning and Commercial Refrigeration Divisions, Section 448, Bloomfield, New Jersey.

☆ BUY WAR BONDS ☆

Industrial Refrigeration by

GENERAL ELECTRIC

Hear the General Electric Radio Programs: The "G-E ALL-GIRL ORCHESTRA," Sundays, 10 p. m., E W T, N B C . . . "THE WORLD TODAY" News, Every Weekday, 6:45 p. m., E W T, C B S

READING CHET RICKER'S STORY on the Nazi buzz bomb (page 190) brought to mind the work of our own inventors some 25 yr. ago. After a year and a half of experimenting on a flying bomb, everything was set for the trial flight, which was to parallel a line of our destroyers out in the Atlantic. The buzz bomb was to carry 5 gal. of fuel so that it would hit the ocean somewhere this side of the last destroyer but, through a slip in orders, it was gassed to capacity. Last report from the furthermost destroyer was this laconic radio message: "At proper altitude, on course, disappearing over horizon." Nobody ever will know how big a splash it made.

• Very official-looking sign posted prominently in an Officers' Club: "In case of air raid stand near slot machines, the jackpot hasn't been hit yet."

• At the recent American Helicopter Society meeting the renowned Igor Sikorsky reported how, some time ago, he had shown some movies of his helicopter to United's Board Chairman Rentschler, who was duly impressed. As the lights came up, Mr. R. said somewhat facetiously: "Igor, I have seen your machine hover, fly to the right, fly to the left, and fly backward. Now how about showing us some views of it going forward." To which the irrepressible Mr. S. replied, "I am sorry, Mr. Rentschler, that is one problem we have not solved yet."


• Discussing helicopters the other day with a veteran test pilot, we asked if he'd flown a certain job. "Oh yes," he replied, "as a matter of fact I set an altitude record for it. I'd been hovering just off the ground, feeling out the controls when, somehow, it got out of the ground cushion air and *pffft*. I suddenly found myself up between 60 and 70 ft.—and plenty scared, too.

• We asked this same pilot what contribution he thought had been made by a new type 'copter which recently completed its maiden flights. "One thing," he said, "at least—by flying it has proved something we've all been looking down our noses at for a long time."


• Golf widows have been with us for some time, but we just heard of our first airplane widower. Seems a couple on the Atlantic seaboard had lived in perfect marital bliss for some years—until the war brought a Navy patrol base nearby. Under certain winds the pilots had to take their heavily laden PBM's off right over the couple's house. Anyhow, it drove the Mrs. mad. She swore they practically scraped paint off the roof, and though also swearing undying love for hubby, she packed up and went home to mother "till they're gone." We think the story will have a happy ending, for scuttlebutt says the squadron is about to be transferred. Hubby's got his fingers crossed, but tight.

• Back in the days when practically every personal airplane was designed around the OX-5, the dwindling supply of this type engine gave an operator quite an idea, one by which he thought he might well corner the market on the remaining new OX-5's. He was selling quite a few airplanes, by those days' standards, and he made a practice of taking fly-away delivery on all of them. At the end of the first day's flight away from the factory he always landed at an isolated pasture, where he'd be met by a cohort with a truck. During the night they'd take out the new engine, put in a re-conditioned job, and then next morning he'd fly on to deliver an all "new" plane. By the time he got caught he had himself a really good supply of new OX-5's, but he never was quite able to corner the market. Although out of jail now he's reported to have no interest whatsoever in the post-war personal plane distribution field.

• Good friend of ours who's spent the last year or so pushing young soldiers through a concentrated propeller-servicing course reports he was almost whipped not long ago. Seems one young soldier was a whizz of a natural mechanic—anything he could do with his hands he did superlatively. But the mathematics of subtracting degrees for pitch setting just wouldn't sink into his brain; for some reason his mind drew a blank on it. Finally, in desperation, the instructor said, "If I had $27.43 and gave you $19.52, how much would I have left?" Quick as a flash came the answer, "That'd be $7.91," and with it the solution to their problem. "Now," says the instructor, "I'd fly behind any prop that kid had serviced."

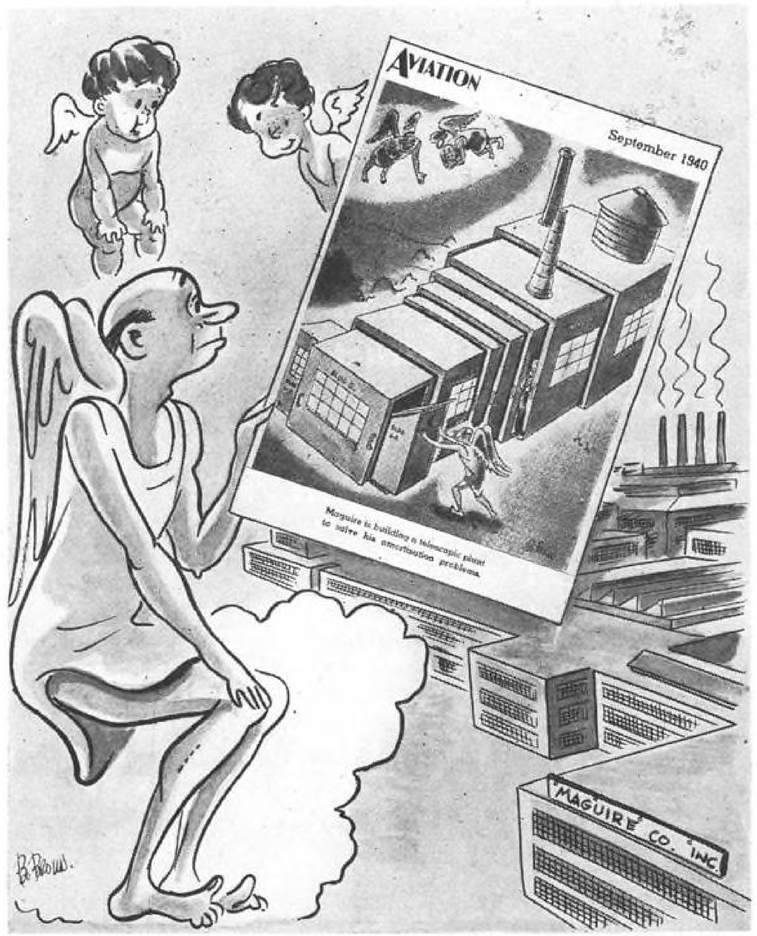

"Back in '40, Maguire's engineers gave him an expandable plant, but they didn't give him any termination-contraction plans."

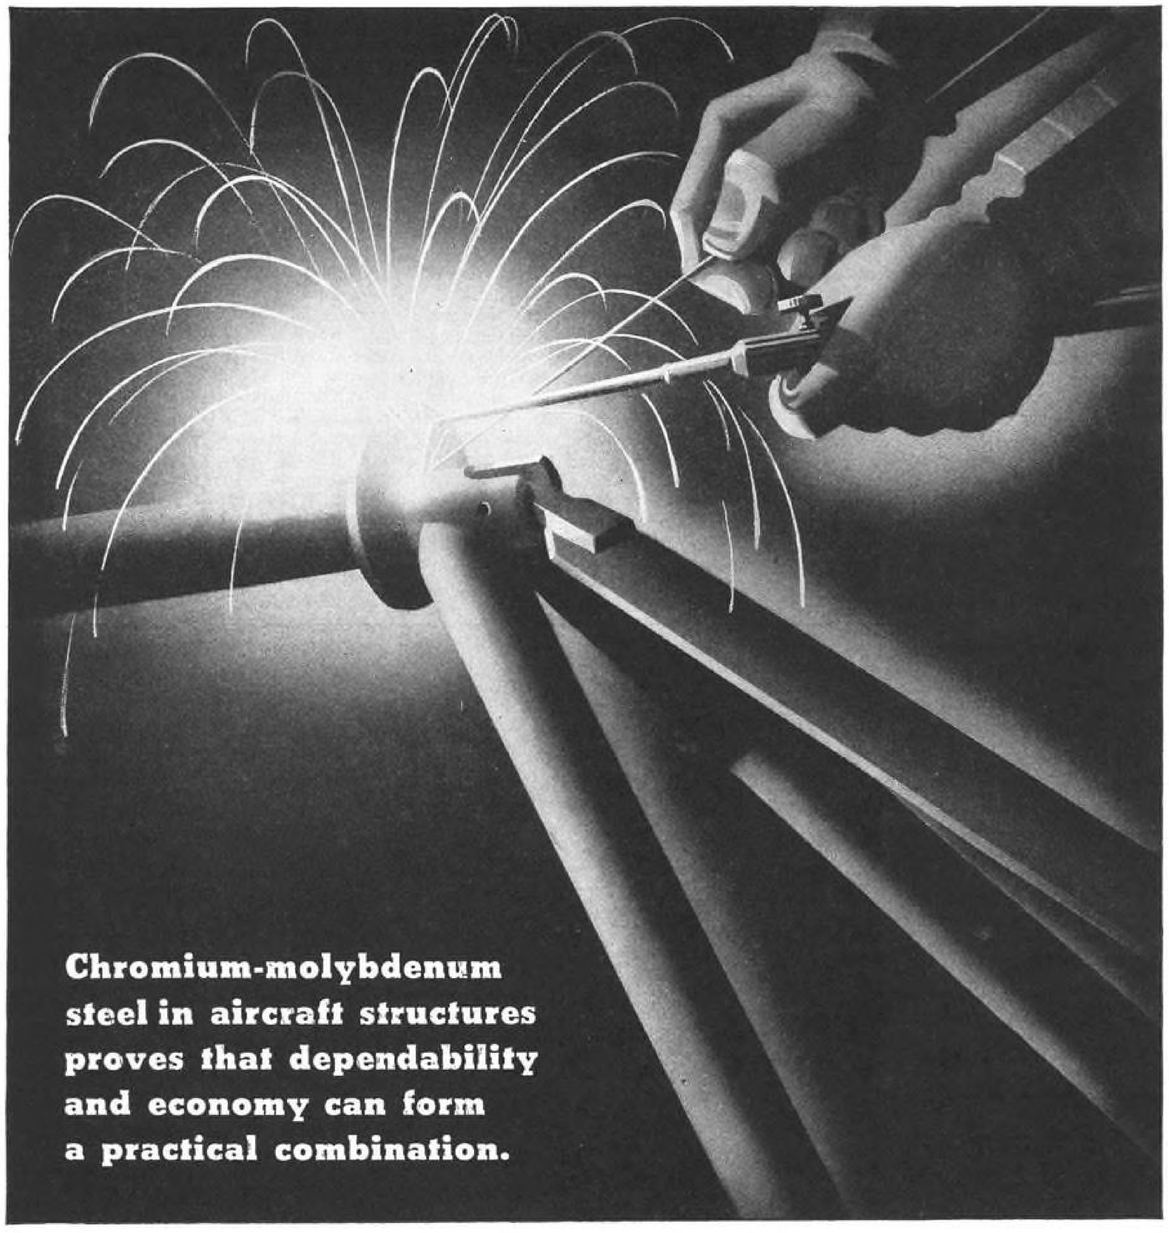

CLIMAX FURNISHES AUTHORITATIVE ENGINEERING DATA ON MOLYBDENUM APPLICATIONS.

ARMY E NAVY

MOLYBDIC OXIDE, BRIQUETTED OR CANNED • FERROMOLYBDENUM • "CALCIUM MOLYBDATE"

Climax Molybdenum Company

500 Fifth Avenue • New York City

MOLY

KEEP POSTED ON *Products and Practices*

This selected information on new publications and products is offered by the "AVIATION" Reader's Service through cooperation with the manufacturers. It helps executives save valuable time, provides profit through convenience. To obtain literature or additional data on new products described, simply fill in form below, clip it to your letterhead, and mail. There is no cost, no obligation.

ENGINEERING DATA

Tube Bursting Pressures.....1

Bursting Pressures of Seamless Steel Tubing is title of new bulletin issued by Globe Steel Tubes Co., Milwaukee, described as reference chart for engineers. Tubing from ⅛ to 9⅝ in. o.d. is covered.

Spring Design 2

Muehlhausen Spring Corp., Logansport, Ind.., offers booklet, *Springs Designed For the Job Improve Product Performance.* Described are four factors essential to correct spring design; illustrated are five basic types with wide variety of shapes and sizes; and covered in detail are twelve commonly used spring materials.

Vinyl Chloride Latex.....3

Bulletin descriptive of "Geon" latex, a colloidal dispersion of vinyl chloride types of polymers in water, is offered by Chemical Div., B. F. Goodrich Co., Akron. Nature, stability, physical properties, and compounding of product are discussed.

Universal Joints 4

The Gear Grinding Machine Co., Detroit, offers technical bulletin on "Rzeppa" universal joints, stated to be designed on new mechanical principle.

Pressure Tubes 5

Bulletin from Revere Co., Wallingford, Conn., describes pitot-static, static, total pitot pressure tubes, and static-pitot thermocouples and their installation.

Aluminum Alloy 6

In publication, *Aluminum Progress*, (Vol. 1, No. 2) Reynolds Metals Co., Louisville, describes R-301, new aluminum alloy for use in aircraft, that is stated to have greater strength, permitting structural members to be of lighter gage.

Vulcanized Fiber 7

Engineering data on phenol and vulcanized fiber is given in bulletin offered by N. S. Baer Co., Hillside, N. J. Listed are standard grades, and electrical properties, mechanical strength, and moisture absorption are detailed.

Powder Metallurgy 8

Chrysler Corp's. Amplex Div., Detroit, announces new commercial powder metallurgy catalog containing information on engineering developments and general data. Listed are more than 13,000 available sizes of bearings and cored and bar stock sizes, and such subjects as specifications, design features and practice, shaft clearance, load rating charts, recommended methods of sizing, and tolerance data are covered, along with drawings and tables on chamfers and fillets, easy machining methods, and data on lubrication.

Locking System Catalog.....9

Bardwell & McAllister, Hollywood, Calif., has published new catalog on Rosan locking system for threaded inserts and studs, with specifications and installation procedure.

Propeller 10

Iso-Rev automatic constant-speed propeller for light and medium powered aircraft that uses V-belt on split-pulleys principle, is described in new booklet issued by Zimmer-Thompson Corp., Long Island City, N. Y.

Cellulose Motion Picture.....11

Hercules Powder Co.'s Cellulose Products Dept., Wilmington, Del., offers new film, *Careers for Cellulose*, that traces story of cellulose from cotton fields through Hercules plants to testing laboratories and manufacturing plants. Technical details are shown.

Paper Industry 12

Industrial Papers—The New Production Answer, booklet from Central Paper Co., Muskegon, Mich., describes use of paper as a flexible and versatile material capable of improving products while reducing costs and as a substitute for scarce materials. Quick index lists 68 industrial papers.

Metallizing Process 13

Folder descriptive of "Metcolizing," processes for prevention of corrosion of iron and steel at high temperatures, is offered by Metallizing Engineering Co., Long Island City, N. Y.

Retaining Rings 14

Booklet containing engineering data for external and internal types of Waldes "Truarc" retaining rings is offered by Welded Koh-I-Noor, Inc., Long Island City, N. Y. Included are specifications and dimensions for rings from 0.125 to 10-in. shaft dia., also thickness and groove dimensions.

PRODUCTION

Infra-Red Process 15

Near infra-red radiant heat process is described in new illustrated brochure issued by Wabash Appliance Corp., Brooklyn.

Heat Resistant Coatings.....16

Resistance to heat, corrosion, and oxidation through use of "White Hot" and "Pyro-Chrome," protective coatings, is described in bulletin from Preferred Utilities Mfg. Corp., New York. Application is to refractories, metals, and ceramics.

Tool Maintenance 17

Frederick L. Woodcock (chief engineer, Hamilton Standard Propellers Div., United Aircraft, Hartford, Conn.) has written an article titled *Extending the Life of Tools and Gages*, describing the brazing process of repairing, using low-temperature silver alloy. Copies are available from Handy & Harman, New York City.

Drill Pointing 18

Correct procedure for pointing drills is given in booklet, *Correct Drill Pointing*, issued by Chicago-Latrobe Twist Drill Works, Chicago. It also contains table of cutting speeds.

Sealers and Cements 19

Dolphin Paint & Varnish Co., Toledo, announces new catalog on its products—air and dust sealers, cements, glazing compounds, rustproofers, and cold resisting putties.

Packaging Materials 20

Sherman Paper Products Corp., Newton Upper Falls, Mass., offers revised manual on packaging materials, with emphasis on protection of war materials. Digest of government specifications and expanded section on protection of metal products is included.

Precision Grinding 21

Use of straight oil for precision grinding is described in booklet, *Grinding With Oil*, issued by D. A. Stuart Oil Co., Chi-

AVIATION READER'S SERVICE
AVIATION, 330 W. 42nd St., New York City 18

NOVEMBER 1944

Please send me additional information according to key numbers circled.

INFORMATION TIPS: 1 2 3 4 5 6 7 8 9 10 11 12
13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30
31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48
49 50 51 52 53 54 55 56 57

NEW PRODUCTS: 58 59 60 61 62 63 64 65 66 67 68 69 70
71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88
89 90 91 92 93 94 95 96 97 98 99 100 101 102 103 104 105 106
107 108 109

NAME ..... TITLE.....

FIRM OR AFFILIATION.....

ADDRESS .....



In the Field of

RADIO NOISE ELIMINATION,

Tobe is the Acknowledged Leader!

ONE engineering result of the war is increased knowledge of radio interference problems. It will never be lightly treated again. No engineer can tackle the development of an electrical design without giving due consideration to minimizing the radio interference it creates in operation. Specially designed filters, to be built into electrical circuits, can usually solve the problem of radio interference.


Here at Tobe is a great storehouse of knowledge in this subject. It is *sound* knowledge, gained by the most intense interest and experience of any company in the field.

Tobe Filterizing is a copyrighted term. It means that Tobe knows how to "filterize" man-made radio noise. Why not make use of this valuable 16 years' of experience in your own engineering? Place your reliance on Tobe and the famous Tobe Filterettes. Send us your problems now.



CONTAINER DIMENSIONS

Length . . 3 1/16"
Width . . 2 1/8"
Height . . 2 7/8"
Overall length 5 7/32"

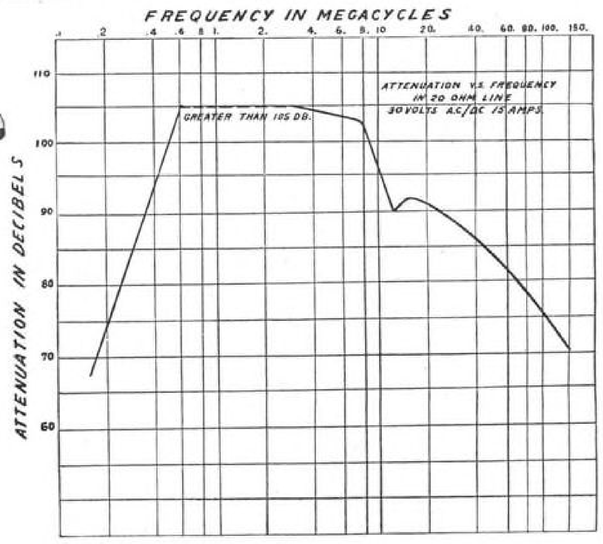

LONG LIFE ASSURED!

TOBE DEUTSCHMANN CORP.
CANTON, MASS.

SUPPRESS MAN-MADE RADIO STATIC
TOBE FILTERIZED

A SMALL PART IN VICTORY TODAY — A BIG PART IN INDUSTRY TOMORROW

cago. Featured is chart comparing wheel markings of several of the larger grinding wheel manufacturers.

Welding Mild Steel.....22

New method stated to increase speed in the welding of mild steel—"Fleet-Welding"—is described in booklet from Lincoln Electric Co., Cleveland. Among subjects covered are: Use of "arc force" to increase speed; effect of penetration on costs; factors effecting speed; and information on use of procedure tables.

Welding Symbols Chart.....23

Hobart Bros. Co., Troy, Ohio, offers new wall chart illustrating basic characters of welding symbols recommended as standard by American Welding Society. Graphical language of industry is illustrated separately for fusion welding, resistance welding, and for combination of both.

Scheduling System 24

Machine Load Control, bulletin from Remington Rand, Inc., Buffalo, describes equipment and procedures connected with the "Sched-U-Graph" scheduling system, stated to have been recently improved.

MACHINERY & ACCESSORIES

Care of Micrometers 25

Designed to introduce company's master setting and checking rolls for micrometers and other precision measuring instruments, *The Use and Care of Micrometers*, booklet from Sav-Way Industries, Detroit, describes functions of parts and tells how to use and care for micrometers. "Do and don't" list is ineluded.

Soft Metal Melting.....26

Surface Combustion Co., Toledo, has published bulletin, *Soft Metal Melting With Surface Combustion Furnaces*, describing equipment and giving properties of soft metals.

Counterbores and Cutters.....27

Moreland Tool Co., Detroit, has published new catalog on counter-bores and special high speed steel cutting tools, including carbide-tipped tools.

Rotary Shear Attachments.....28

Bulletin No. QW-120 from Whiting Corp., Harvey, Ill., features applications and operation of attachments for rotary shears. Attachments are designed for effective handling of circle cutting, splitting, joggling, and flanging.

Fluid Motors 29

Sundstrand Machine Tool Co., Rockford, Ill., offers bulletin, *Oil Power Fluid Motors*, describing operating principles, features, applications, and engineering data on these units.

Inspection Equipment 30

Barco Scraping Co., Cleveland, has issued bulletin describing surface plates, angle irons, and straight edges made of "Meehanite."

Surface Inspection 31

New process of surface inspection is described in bulletin from Rex D. McGill, Cleveland. Employed is plastic film, one side of which is softened by use of solvent, after which a contact replica of surface is made. Mounted in cardboard frame and projected, image can be enlarged 100 diameters, and all contours are shown in three dimensions. Process called "Faxfilm," is described as speedy, inexpensive, and accurate.

Broaching Machines 32

Colonial Broach Co., Detroit, announces bulletin descriptive of its line of pull-up broaching machines, tools, and attachments.

Milling Machine 33

The Miller That Uses Its Head is the title of booklet from W. H. Nichols & Sons, Waltham, Mass., describing processes and practices in use of milling machines.

Pressure Unit 34

Mechanics Engineering Co., Jackson, Mich., offers circular describing "Bar-Lok" quick-acting pressure unit designed for medium and heavy duty. It is stated to give speedy adjustment and firm holding in jig and fixture work and in machine, assembly, and also welding operations.

Belt Polishing Machine.....35

Circular describing VM-DBX abrasive belt polishing machine has been issued by Divine Bros. Co., Utica, N. Y. Sizes and specifications are given.

External Indicating Gages.....36

Described in new folder are external indicating gages made by Metrical Laboratories, Ann Arbor, Mich. Emphasis is placed on use of indicating rings of snap gage type, stated to make readings as close as .000025 in. possible.

Cutters 37

New catalog on cutters, router bits, heads, and machines has been published by Ekstrom, Carlson & Co., Rockford, Ill. Sizes, specifications, and hints on applications are given.

All-Around Loader.....38

Universal loader, designed for use as platform loader, lifting rack, material bucket, crane, bulldozer, and having many other applications to heavy work, is described in circular from maker, Lull Mfg. Co., Minneapolis.

Flat-Spray Nozzles 39

Folder descriptive of "Rex" flat-spray nozzles and their uses where water is used in cleaning, cooling, and washing operations, has been received from manufacturer, Chain Belt Co., Milwaukee. Tabulated information on their discharge in gpm., their dimensions, and list of materials and sizes are given.

Surface Grinders 40

Engineering data on surface grinders is offered by Ampco Metal, Milwaukee, in Bulletin No. 126.

Reduction Units 41

"Speedaire" fan-cooled worm-gear reduction unit is described in bulletin offered by Cleveland Worm & Gear Co., Cleveland.

Metal Piercing 42

Wiedemann Machine Co., Philadelphia, has issued bulletin describing method of super-speed piercing of sheet metal through templates by R-34 turret punch press.

ELECTRICAL

High Frequency Cable.....43

Circular from Federal Telephone & Radio Corp., Newark, N. J., gives impedance nomographs on its "Intelin" coaxial cable.

Spark Plug Connectors 44

"Contact" shielded sparkplug connectors, made by Menaugh-Dutterer Co., Chicago, are illustrated and described in new company bulletin just issued.

Ceramic Wire Insulation.....45

Sprague Electric Co., North Adams, Mass., announces new ceramic-coating wire insulation, "Ceroc 200," stated to withstand 200 deg. C. continuous operating temperatures.

Noise-Suppression Capacitor 46


Bulletin GEA-4308, from General Electric Co., Schenectady, describes new "Pyranol" radio-noise-suppression capacitor, specially designed to reduce radio-noise from generators, inverters, motors, and other sources.

Electronic Book Guide.....47

Guide to literature on radio and electronics is offered by Allied Radio Corp., Chicago. Listings are both by subjects and by publishers.

Aircraft Controls 48

Lear, Inc., Piqua, Ohio, offers reprints of paper, *The Key to Modern Aircraft Controls—Electricity, Remote and Automatic Electric Controls for Modern Aircraft*. William P. Lear, company president, presented this paper at joint meeting of Franklin Institute, Philadelphia, and local section of AIEE.

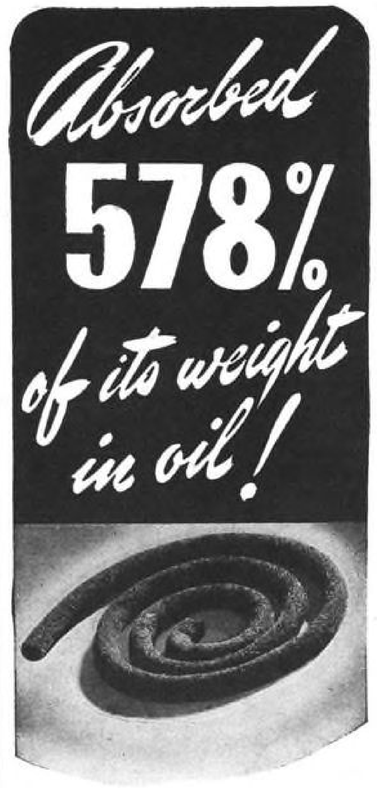

After 24 hours' immersion in S.A.E. 20 oil, wick specimens (each .25" diam. x 30" long) of six different types of Booth "prescription" felts were surface-drained and then weighed. Oil absorption as high as 578% of the original weight of specimen was recorded.

Various Booth felt tests, by independent laboratories, may give you new angles on felt. Ask for copies of the reports.


THE BOOTH FELT COMPANY
482 19th Street Brooklyn, N. Y.
745 Sherman Street Chicago, Ill.

APPLICATION CHART AND SAMPLE KIT . . . Contains swatches of S.A.E. felt types, with specification tables. Write for it. (No sales follow-up.)

2074

Booth
TRADE MARK

PRECISION CUT FELT PARTS

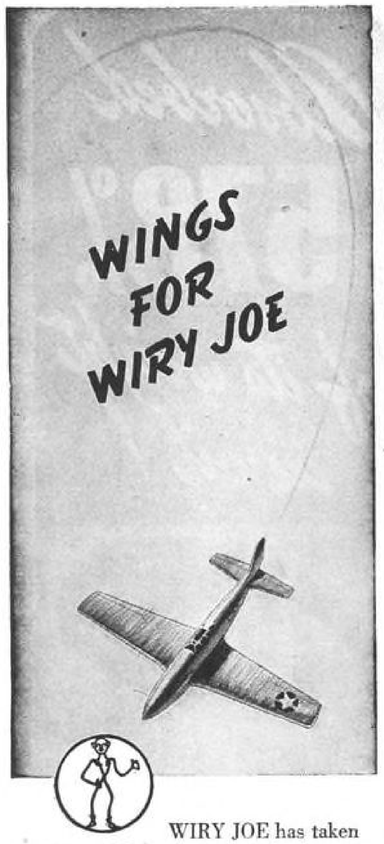

WIRY JOE has taken to the air! Long famous as the largest independent manufacturer of automotive replacement wiring, Wiry Joe today is an important source of aviation wire and cable.

Produced under the Dostam method of manufacture, to assure uniformity ... dependability ... high efficiency ... long life, Wiry Joe electrical wire and cable for aircraft conforms fully with rigid Army and Navy specifications.

Inquiries concerning electrical wire and cable for any type of service—aviation, marine, automotive, industrial—will receive prompt answer.



Wiry Joe
AVIATION CABLE
manufactured by
THE CRESCENT COMPANY, INC.
Pawtucket, Rhode Island

Valve Positioner 49

Bulletin No. J602-2 from Wheelco Instruments Co., Chicago, concerns "Throttletrol," described as simplified valve positioning device to be used in conjunction with any control instrument having high and low contact with a neutral position. Operation is described and features detailed.

Plastic Coatings 50

Catalog describing uses of "Americoat" and including list of organic and inorganic materials which it protects against corrosion, is announced by American Pipe & Construction Co., Los Angeles.

Polythene Plastic 51

E. I. duPont de Nemours, Wilmington, Del., offers details from paper, *Some Physical and Chemical Properties of Polythene*, read before American Chemical Society by Dr. F. C. Hahn. Application of plastic by flame-spraying method is among developments detailed.

Booklet on Plastics.....52

Titled *Facts About Plastics, Molded and Laminated*, highly detailed color booklet issued by The Richardson Co., Melrose Park, Ill., is replete with photos and diagrams illustrating types, forms, and applications of various plastics, with specific consideration of company's laminated and molded Insurok. Characteristics of the many types of plastic materials are given, and there are sketch-illustrated suggestions for proper design of parts.

STEEL

Forging Temperatures 53

Evaluating the Forgeability of Steels is booklet offered by Timken Roller Bearing Co., Canton, Ohio, containing recommended forging temperatures of 68 steels, as determined by hot-twist test. Apparatus and procedures used are described and results interpreted.

Metal working 54

Factual information on metal working, heat treating, machining, and rust prevention is given in booklet issued by E. F. Houghton & Co., Philadelphia. This publication has been prepared as supplement to company's regularly issued *Houghton Line*.

MANAGEMENT & EMPLOYEES

Water Heater 55

Circular from O'Brien Steam Specialty Co., Syracuse, N. Y., gives specifications on steam mixer water heater, described as packaged unit consisting of heater, temperature regulator, temperature-pressure relief valve, thermometer and, when desired, water pressure regulator and steam and water pressure gages.

Floor Compound 56

A. C. Horn Co., Long Island City, N. Y., has published bulletin on "Ferem," a floor compound described as containing all desirable characteristics of hardeners, admixtures, and processed components. Product, stated to require only addition of cement and water, is reported to have hardness rating of 9 on Mohs scale.

Contract Termination 57


A. B. Dick Co., Chicago, offers booklet, *The A B C of Contract Termination*, describing simplified method of producing numerous papers required for settlement of claims.

NEW PRODUCTS

Latest Machine Tools

Gap Frame Press.....58

E. W. Bliss Co., Brooklyn, has developed new 100-ton gap frame hydraulic press designed to combine rugged frame construction with smooth enclosures. Press is arranged for manual control, but electric control is available for automatic reverse, either by pressure or position. Various types of pumps are available, usually mounted on frame for small production, and on top of frame for high speed production. Modification of bed and slide for special purposes can be made. Some of specifications are: Bed area, 20 x 20 in.; center line ram to throat, 15 in.; max. stroke, 18 in.; overall height, 145 in.; and weight, 25,000 lb. —AVIATION, Nov., '44.

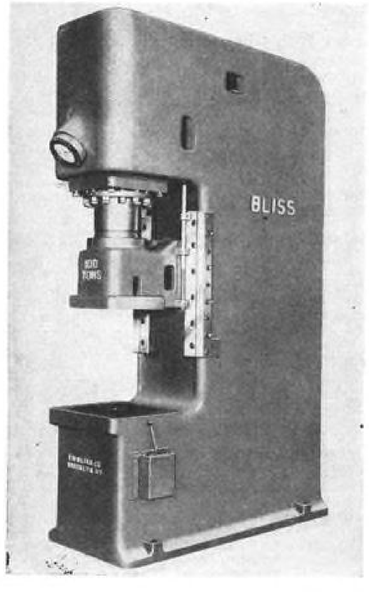


Shot Peening Machine.....59

Known as "Wheelapeening" equipment, new machines for shot peening stressed parts, such as gears, springs, crankshafts, connecting rods, milling cutters, and pneumatic drills, have been developed by **American Foundry Equipment Co.**, Mishawaka, Ind. In these machines a rain of metallic shot is directed at high velocity against part, each shot making a tiny dent or pit, cumulative effect being to stretch surface layers by cold working, to put them in state of residual compression. The "Wheelabrator", an airless, centrifugal blast unit, receives shot from hopper to its bladed wheel. An impeller rotates with wheel proper, carrying shot to opening in stationary control cage, where it discharges to bladed section. There, shot is picked up by inner ends of throwing blades and is gradually accelerated in its passage to periphery of wheel. Final throwing velocity is result of radial and tangential forces. Models to give different combinations of motion for peening parts of various shapes and sizes are available.—AVIATION, Nov., '44.


Electric Furnace 60

Model OFE furnace, providing temperatures up to 1,850 deg. F., is new electric unit made by **Thermo Electric Mfg. Co.**, Dubuque, Ia., for heat treating dies and tools and for other industrial and laboratory use. Stated to be improvement is arrangement in which door is supported by two sets of parallel levers that moves door upward and out of way. Heat selection is provided by input controller which automatically turns heat on and off for any desired position of a 1-min. cycle. Instrument panel includes indicating pyrometer calibrated to 2,000 deg. F., pilot light, and on-and-off switch. Furnace is 21-in. wide, 31-in. high, and 18-in. deep, while chamber is 5⅛-in. wide, 4½-in. high, and 10½-in. deep. Operation is on 115 or 230v., with rated of 2,000 w.—AVIATION, Nov., '44.

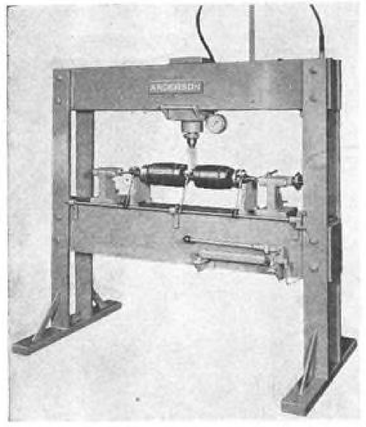

Armature Straightener.....61

Anderson Bros. Mfg. Co., Rockford, Ill., has produced new armature-straightening press in which three or more indicators are employed to check shaft at vital points. Spring mounted centers are fitted on "V" slide. Ram, of traveling type, rolls on four pre-lubricated bearings, while hydraulic gage is mounted on ram. Capacity is 20 ton, and press will swing armatures up to 14-in. dia. Total length is 65 in., and power is from hand hydraulic pump, which can be replaced with power unit if desired. —AVIATION, Nov., '44.

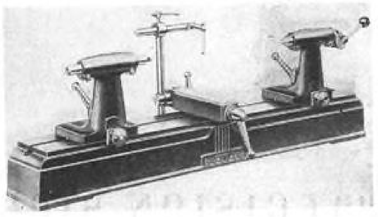

tain 60-deg. angle centers. Maximum distance between centers is 19½ in., over-all length of bed 32 in., and width is 5½ in. Ground bed is 4½ x 30 in.—AVIATION, Nov., '44.

Metal Cutting Saw.....63

New metal cutting band saw, called buttress saw, is announced by **The Do-All Co.**, Des Plaines, Ill. It is designed for rapid production, parallelism, and close tolerance. Tooth gullets are elongated and teeth securely anchored. Made in widths from ¼ to 1 in., with various sets and pitches, saw can also be used for non-metallic materials.—AVIATION, Nov., '44.



Bench Center.....62

Designed to meet need for accurate, easily operated inspection and testing devices, **Delta Mfg. Co.**, Milwaukee, announces new bench center in which indicator support bracket has base which can be quickly and firmly locked in any position by means of handle at front. Top surface is flat, and head and tail stocks can be reversed. Both stocks con-


Shop Equipment & Accessories

Circuit Breaker.....64

Now in production is new single-pole circuit breaker for 240v. a.c. and 125v. d.c., 50 amp. max. It may be front or rear connected and has instantaneous trip or selection of three time delays. Measuring 5¼-in. long by 2 11/16-in. high, and 1⅛-in. wide, breaker is made by **Heinemann Circuit Breaker Co.**, Trenton, N. J.—AVIATION, Nov., '44.

Drill Saver.....65

Stated to enable use of broken drills formerly discarded, new drill holder has been developed by **C-B Tool Co.**, Lancaster, Pa. In operation, broken end of drill is slipped in drill saver, which is then chucked up. Slot in chuck which compresses holds drill firmly, and opening at opposite end is described as permitting easy removal of drill. Drill savers are made to accommodate five drill sizes: Nos. 51 (.067); 41 (.096); 30 (.1285); 21 (.159); and 11 (.191).—AVIATION, Nov., '44.

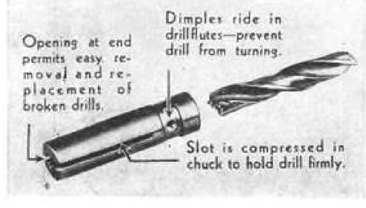

Fuse Panel.....66


Blueprints available gratis from **Littlefuse, Inc.**, Chicago, are stated to enable manufacturers to save engineering time by selecting factors for fuse panels precisely to their individual specifications. This development is based on company's announcement of its universal fuse panel No. 1505. Panel is for Models 3 A G and 3 A B, 4 A G and 4 A B, and 5 A G and 5 A B Air Corps type of fuses and clips. One number covers mounting. Company states that user has only to check factors for panels on blue print. First dash number indicates fuse specifications, and second dash number specifies number of poles. Specifications include bus bars, if required, and number of poles to be bussed. In aircraft, it is stated that panels can be placed at an accessible point (rather than in central juction box) and can be replaced, under gunfire, by adjacent crew man. Dispersal renders panels less liable to damage.—AVIATION, Nov., '44.

Synthetic Rubber Blend.....67

Stated to be useful in aviation industry for sealants, cements, and acid-resisting coatings, Thiokol "ST" is new type of synthetic rubber described as having low temperature flexibility with-

Get the Specifications On This Improved

One-Piece Solderless Terminal

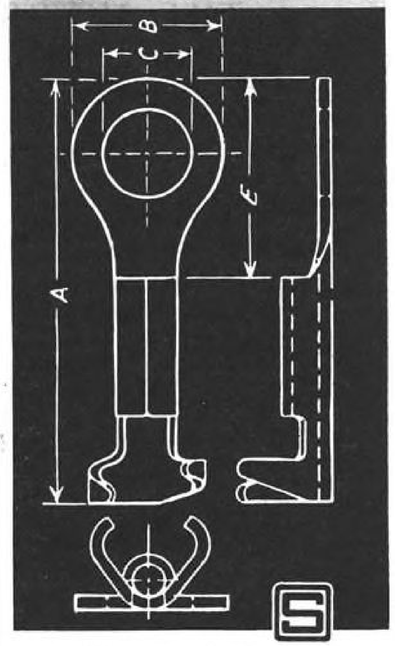

You'll be amazed to see how production can be increased and performance improved, with the Sherman UNI-CRIMP One-Piece Solderless Terminal.

Here's a terminal that insures highest conductivity. It is made of fine grain, specially rolled, pure electrolytic copper, rated at 100% conductivity. And — the entire inside of the barrel is serrated, which provides a strong grip on the entire circumference of the wire, and *greatly increases the contact area.*

Write for Bulletin UC-2, giving full specifications. See for yourself why the UNI-CRIMP is stronger mechanically, more efficient electrically, easier to install, and more economical.


Find out how you can switch over to the UNI-CRIMP and speed up production, without any change in your present set-up.

H. B. Sherman Mfg. Co., Battle Creek, Mich.

The Sherman
UNI-CRIMP
Solderless Terminal

THE MASS-PRECISION STORY BEHIND

Nylon

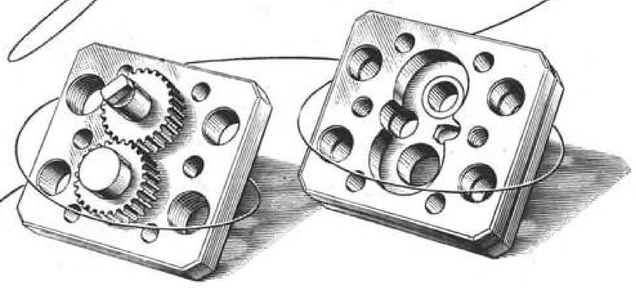

Imagine a precision mechanism maintaining its "split-tenths" accuracy while spending its entire life submerged in molten fluid hot enough to soften armor plate in a few minutes.

Du Pont engineers posed this unusual manufacturing problem when they brought the designs of their first nylon pump to Nichols.

From the start, the required alloy stubbornly defied accepted machining and finishing methods, yet surface scratches had to average less than two-millionths of an inch. Lapping to ± .000025" and gears thicknessed to .00005" were specified, and the pump was to produce output pressures ten times that needed to make rayon.

Nichols overcame the combined obstacles of heat, pressure and machining to make the first nylon pump. Today these are exclusively manufactured here on a *strictly interchangeable parts and assembly basis* and are used wherever nylon is made.

Such accuracy in over forty years of *mass-precision* manufacturing is traditional at W. H. Nichols & Sons. Specialized facilities and advanced techniques in finish-grinding, lapping, hole location and sizing have developed other products that have been called "the most accurate assembly of commercial parts ever produced."

Have you a product design whose development has reached a manufacturing impasse? Then it's a job to discuss with "Accurate" Nichols.

W. H. NICHOLS & SONS, 48 WOERD AVENUE, WALTHAM 54, MASS.

"Accurate" Nichols


PRECISION ENGINEERING AND MANUFACTURING FACILITIES FOR MASS PRODUCTION.....

ni

out addition of plasticizers, plus resistance to solvents, ozone, and sunlight. It is also described as solution to problem of cold-flow. Maker is **Thiokol Corp.**, Trenton, N. J.—AVIATION, Nov., '44.

A. C. Power Supply.....68

To provide a source of either constant or variable frequency for a.c. power, or for rectified d.c. power, Eclipse a.c.-power supply systems, consisting of vari-

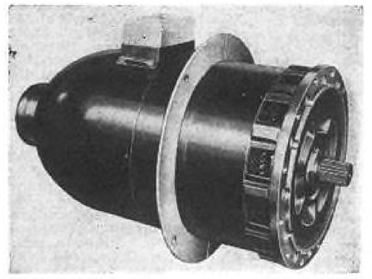

able frequency alternators, carbon pile voltage regulators and compounding units, made by **Eclipse-Pioneer Div., Bendix Aviation Corp.**, Teterboro, N. J., are available in two models, rated at 25 kva. 18.75 kw. and 66.6 kva. 50 kw., weighing 49 and 129 lb., respectively. By installing alternators on constant speed drives, driven by aircraft main engines, source of constant frequency is available, and rectified d.c. power can be obtained, it is stated, from either constant or variable speed operation over rated operating speed range of alternators. Alternators incorporate an integral exciter, and a floating type flexible torque drive shaft compensates for misalignment. Bearings are sealed and prelubricated. Cooling is by integral fan and tubular armature shaft. The 25-kva. alternator delivers rated output between 7,200-8,800 rpm.; 66.6-kva. alternator, between 5,400-6,600 rpm. Photo shows latter model.—AVIATION, Nov., '44.

Fastener Installation Tool.....69

New installation tool for Dzus fasteners is announced by **Topflight Tool Co.**, Towson, Md. Reported to solve several problems in use of these fasteners, operation routine is given as follows: 1. Pierce .507 dia. hole; 2. Insert grommet from underside of sheet, put fastener into grommet, and set with single stroke of pedestal squeezer. Maker states tool produces flat panel with head flush, eliminating cracks and distortion.—AVIATION, Nov., '44.

Improved De-Icer.....70

B. F. Goodrich Co., Akron, has developed new Type 11 de-icer stated to provide better ice removal and improved tear resistance. With Nylon tubes, it is reported to be thinner and lighter. All-over ply of special elastic fabric encloses wire bead at attachment edge, creating thinner cross section. Highly stretchable Nylon fabric is used in tubes, which pulsate when de-icer operates, tubes being recessed. Back of de-icer is ribbed, forming spanwise channels between




wing-skin and de-icer, which guide trapped air to chordwise channels and vent holes, and also help to spread lubricating talc evenly over surface.—AVIATION, Nov., '44.

Electronic Oscillograph.....71

Westinghouse Electric & Mfg. Co., Pittsburgh, announces perfection of new electronic oscillograph, for aircraft engine manufacturers, in which a 50,000v. electron beam generated in cold cathode tube impinges directly upon fixed or rotating photographic film to give sharp, detailed record of electrical phenomena lasting as little as a millionth of a second. Photoelectric control for exposing film carried on rotating drum insures that film will be exposed for one revolution only, it is reported, although drum speed is variable within range up to 7,000 rpm. Electrical phenomena, ranging from spark of an ignition system to lightning striking transmission line, are investigated with this instrument.—AVIATION, Nov., '44.

Tube Cutter.....72

New Britain Machine Co., New Britain, Conn., announces new self-feeding tube

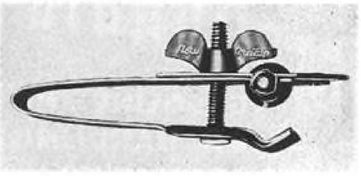

cutter, No. T-130, which handles all tubes, and copper, brass or lead pipe from ⅝ to 1 in. dia. Maker states that after tube is inserted and tightened, it need not be reset, also that tension in frame automatically makes deeper cut on each turn. Weighing 6 oz., tool is 5¼ in. long.—AVIATION, Nov., '44.

How to get Aircraft Alloy Steels in a hurry

Write for an Aircraft Steel Stock List



Just call one of the numbers below and the aircraft alloy steel you need is practically on its way. Ryerson servicemen are specialists in speed. Your steel requirements will get immediate, expert attention.

Stocks Include:

NE 8630, ROUNDS AND HEXAGONS
Conforms to specification AN-S-14a

X 4130, ROUNDS AND HEXAGONS
Conforms to specification AN-QQ-S-684a

NE 8740, ROUNDS
Conforms to specification AN-S-16a

4140, ROUNDS
Conforms to specification AN-QQ-S-752a

These Plants Carry Aircraft Alloys:

CHICAGO
16th & Rockwell Sts.....Phone—Rockwell 2121

NEW YORK
203 Westside Ave.....Jersey City, N. J.
Newark.....Phone—Market 2-6067
New York City....Phone—Rector 2-3700
Jersey City.....Phone—Bergen 4-1123

ST. LOUIS
5 Clinton St.....Phone—Central 1020

CINCINNATI
Front St. and Freeman Ave...Phone—Cherry 3232

Other Steel-Service Plants:
Milwaukee, Detroit, Cleveland, Pittsburgh, Philadelphia, Buffalo, Boston

Joseph T. Ryerson & Son, Inc.

RYERSON

McDonald

GASOLINE AND OIL HANDLING EQUIPMENT



Plate 980
McDonald Super Nozzle
3/4" and 1"

AS ONE OF THE WORLD'S LEADING MANUFACTURERS WE INVITE YOUR INQUIRIES FOR . . .

★ HOSE NOZZLES
★ SWING JOINTS
★ FOOT VALVES
★ EMERGENCY AND OTHER VALVES
★ VENTS
★ PUMP VALVE MANIFOLDS
★ LINE STRAINERS
★ HAND ROTARY PUMPS, ETC.




Plate 963
McDonald Top Clean-Out Line Strainer 2" and 3". Flanged Type Sizes: 3" and 4"

88 YEARS OF DEPENDABLE MANUFACTURE

A. Y. McDONALD MFG. CO.
DUBUQUE, IOWA

Sandblast Cabinet 73

New sandblast unit is combination of cabinet, stationary nozzle, and rotating basket or tumbling barrel, latter being

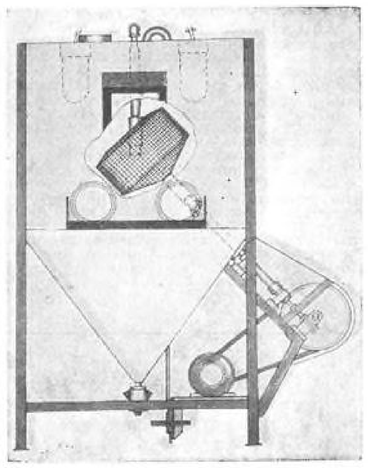

available for sandblasting small articles, such as nuts and screws. Basket is removable to provide space for larger pieces. Maker is **Leiman Bros.**, Newark, N. J.—AVIATION, Nov., '44.

Air Chuck Adapter 74

New collet air chuck adapter is reported by maker, **Redmer Air Devices Corp.**, Chicago, to enable master collet and pads to give capacity up to 4 in. Change-over from standard No. 2 chuck requires removal of stop rod and insertion of adapter; and master collet screws onto this base block, holding collet stationary.—AVIATION, Nov., '44.

Power-Drive Lift Truck.....75


Combination of foot-operated hydraulic lift truck with electric-power front wheel drive called "Transporter" is announced by **Automatic Transportation Co.**, Chicago. Equipment is designed for lifting and short hauling at walking speeds, either on skid platforms up to 6,000 lb. by means of platform type, or pallet unit loads up to 4,000 lb. with fork-type pallet "Transformer". Standard platform lengths are 36 to 72 in., and standard widths 20 and 26½ in., with heights 6, 7, 9, and 11 in. Lift from low to high position is 3⅛ in. Standard pallet fork lengths are 20 in. minimum to 60 in. maximum in 2-in. steps. Standard width is 27 in., and fork height in low position is 3⅜ in. with 3¾-in. lift. Elevated height is 7⅛ in. Lift is by pump and ram action with foot lever. With front wheel drive constant, drive power is stated to provide for maneuverability in close quarters. Push button forward-and-reverse control is in guide handle, and two speeds forward and two reverse are controlled by lowering or raising guide handle. Brakes are automatic, and steering turntable is ball bearing mounted. Drive has double reduction chain drive from series-type motor. — AVIATION, Nov., '44.

Portable Flutter Recorder.....76


Brown Instrument Co., Philadelphia, is manufacturing new portable flight-vibration recorder developed by CAA, described as a self-contained instrument light enough to be held on lap of observer. Designed to supplement more elaborate equipment in use and to make possible rapid reexamination of doubtful studies and many more tests in difficult cases, velocity or acceleromoter type pickups can be placed at many places about structure, and two of these can be operated simultaneously. Recorder contains its own batteries, amplifier, electronic switch, cathode ray tube, and means for observing record on screen. Camera photographs the oscillograph record. Machine is stated to be useful in studying vibration anywhere about plane, such as in motor mounts, cowling, and in small accessories.—AVIATION, Nov., '44.


Ferrule Crimping Machine 77

Portable ferrule crimping machine for use on flexible aluminum and plastic covered electrical conduits and cable has been developed by **American Phenolic Corp.**, Chicago. Model B will ferrule con-

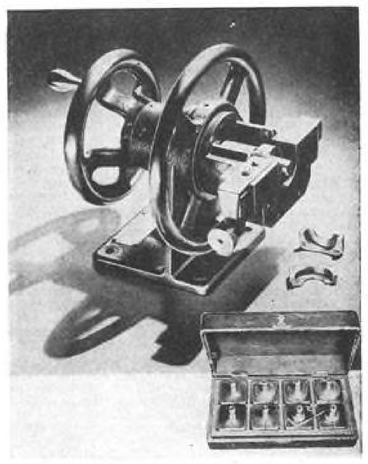

duit from ⅜ to 2½ in. dia.; and Model A, ⅜ to 1¼ in. dia. Collets and mandrels for all sizes are furnished in wood case. Two-step ferrules permit connecting small conduits to larger size connectors.—AVIATION, Nov., '44.

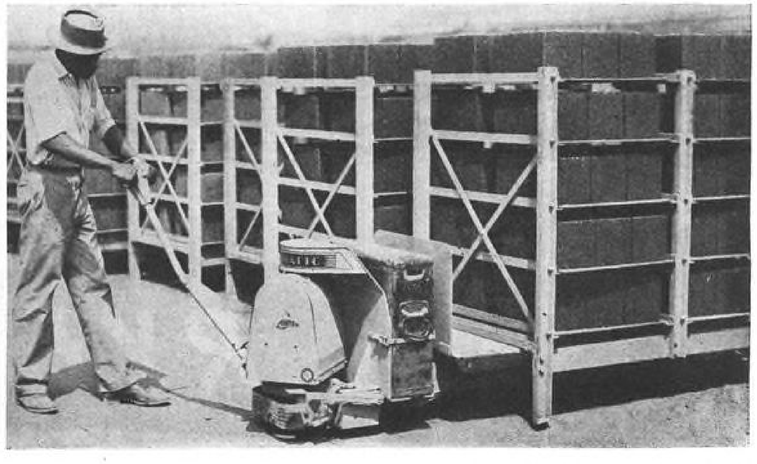

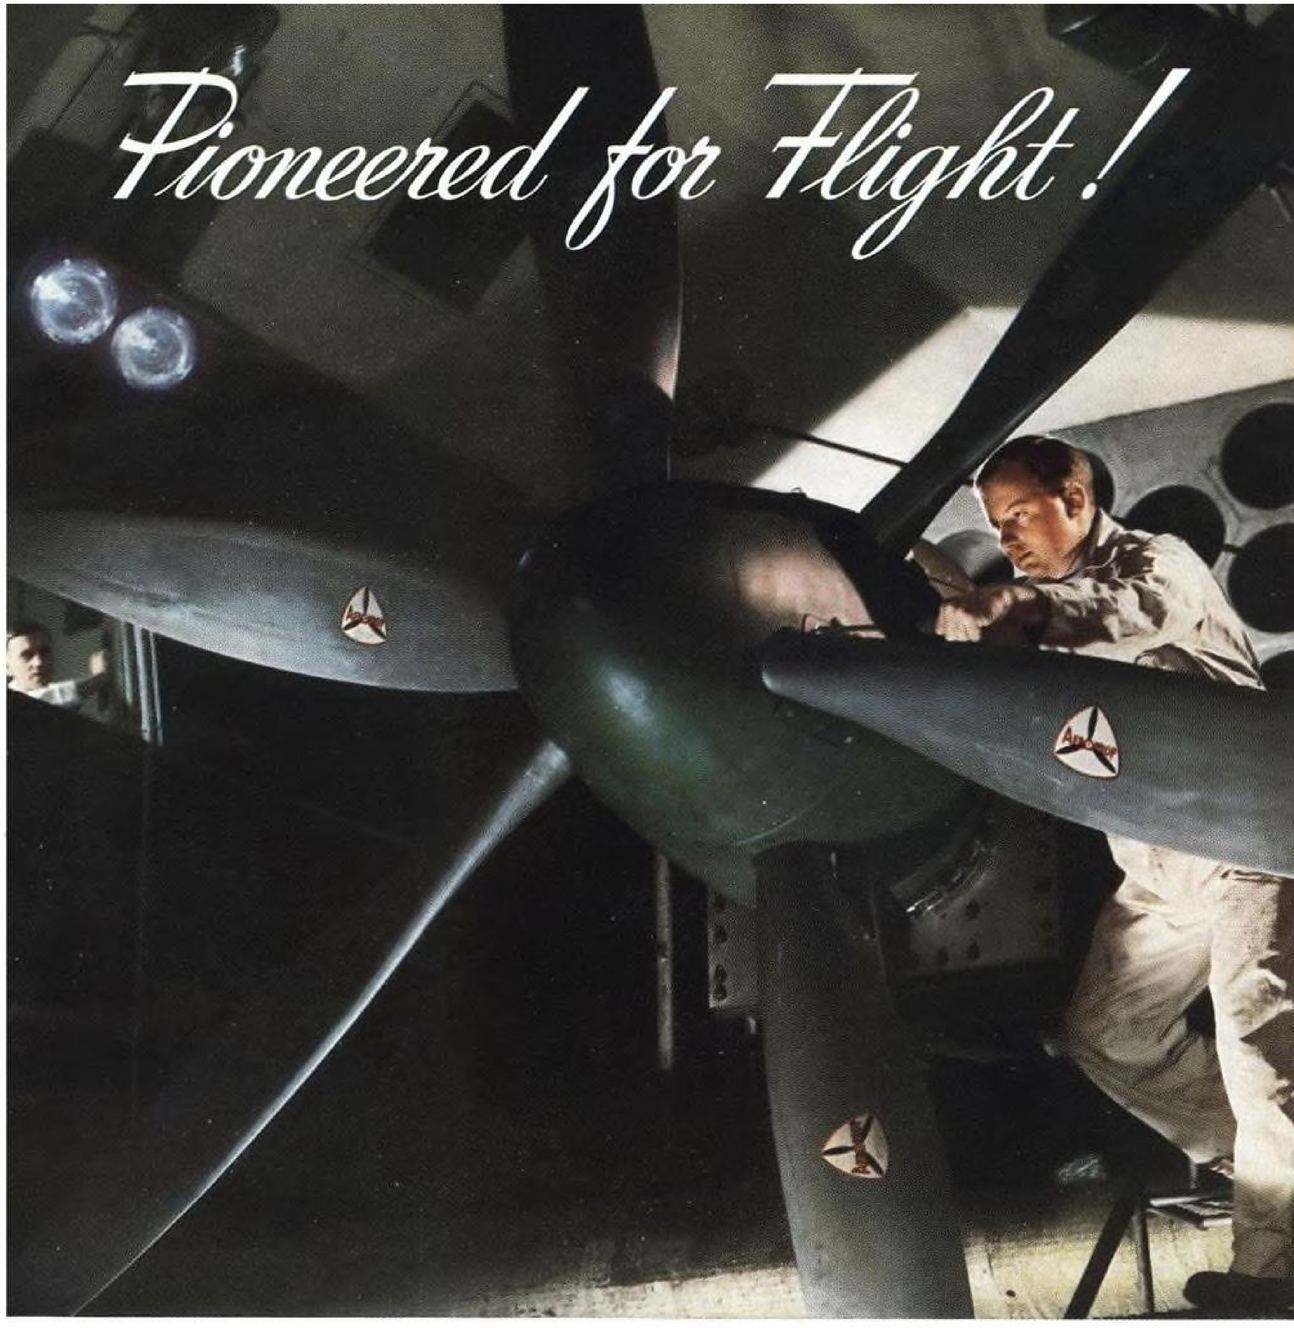

THIS GIANT six-blade Aeroprop was developed for specific military use. It is the only dual-rotation propeller now in production for American fighting planes. Despite the unique problems encountered in combining two sets of contra-rotating blades, this propeller embodies the same simplicity, lightness, and strength that are the basic engineering principles of all Aeroprops. Years ahead in design it offers new horizons for the builders of peace-time planes.

Let's Finish the Fight! BUY BONDS!

Aeroprop

ARMY NAVY

In War and Peace, Propeller Production at its Best!

AEROPRODUCTS DIVISION • GENERAL MOTORS CORPORATION • DAYTON, OHIO

GM ARMS FOR VICTORY



Stitching

SAVES MANPOWER IN AIRCRAFT ASSEMBLY

One man doing the work of *seven* with use of only half the material . . . those are the mathematics of one particular application of the Morrison Aircraft Metal Stitcher!

In addition, many costly operations requiring the use of highly skilled workers are eliminated. Morrison Stitchers call for no special skill of any kind and require only one operator.

And as for this method of fabrication, it's proven, versatile and fast. Research testings show higher strength and longer life for Morrison – stitched assemblies in a wide variety of assemblies. If you are assembling or fabricating applications of Aluminum, Stainless Steel, Plastics, Cork, Rubber, Asbestos, Wood or Textiles — or any combinations of these materials —investigate Morrison Stitchers. Write for Bulletin F1.

★ BUY MORE WAR BONDS ★



Actual photograph, magnified several times, of cross section of stitch driven through two sheets of .040 24 ST Aluminum.

MORRISON

PRODUCTS OF THE SEYBOLD DIVISION
HARRIS-SEYBOLD-POTTER COMPANY
DAYTON F7, OHIO

STITCHERS

Torque Wrench 78

New "sensory" torque wrench, developed by **F. A. Sturtevant Co.**, Addison, Ill., is stated to add elements of sound and feel to that of vision in indicating correct torque. Trigger finger, set at any desired signaling point, sounds distinct click and imparts definite impulse to hand at instant set torque is reached.—AVIATION, Nov., '44.




Carbide Tipped Tools.....79

Series of new cemented-carbide-tipped tools, designed for use with Jones & Lamson roller turners, is announced by **Carboloy Co.**, Detroit. Tools range in size from ⅜ x ½ in. shank to 1 x 1½ in. shank, and are for roller turners Nos. TX536, 537, 805, 813, 865, 873, 875, 876, and 1913.—AVIATION, Nov., '44.

Timing Unit.....80

Electrical Industries, Newark, N. J., has devised new electronic timing unit for use in controlling resistance welding operations. It is stated to be easily applied to existing or new installations. Single knob controls time from 1 to 28 cycles in steps of one cycle. Welding current is electronically switched, and device handles welding power of from ½ to 5 kva.—AVIATION, Nov., '44.

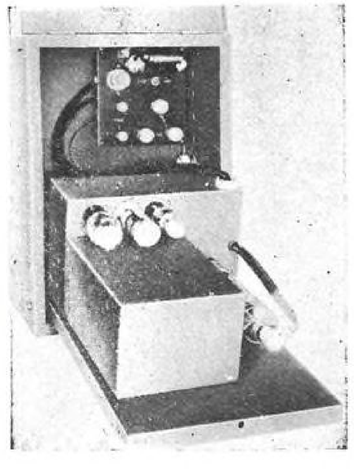

Rust Inhibitor.....81

Witco Chemical Co., New York, announces new rust-preventive coating for metal parts and equipment. Applied by spraying or dipping, it is stated to have melting point in excess of 2,500 deg. F and to remain flexible at 20 deg. below zero.—AVIATION, Nov., '44.

Pre-Cleaner Unit.....82


Aget-Detroit Co., Ann Arbor, Mich., is marketing new pre-cleaner unit to be used with Model 600 dust collectors. Stated to have large storage space for waste material, unit can be supplied complete with power unit, or separately for company dust collector models now in use. Pre-cleaner consists of cabinet containing large dust storage bin and cylindrical centrifugal separator. In operation, virtually all waste matter is stated to be separated from air-stream by pre-cleaner unit; pre-cleaned air is then drawn through fan and returned after passing through spun glass filter at top of dust collector. Storage bin has capacity of 2 cu. ft. Unit is 18 x 25 in., with height (less model 600 collector) 30 in.—AVIATION, Nov., '44.

Grease Gun.....83

Alemite Div., Stewart-Warner Corp., Chicago, has developed electric portable power grease gun, Model 7190, for industrial use. It is equipped with heavy duty wheels and ball bearing front caster. Driving device connects ⅛-hp. motor to high pressure grease piston and cylinder. Mercury switch automatically shuts off motor when 5,000 lb. pressure is built up.—AVIATION, Nov., '44.

Height Indicator.....84

For use on surface plate, new type of precision height indicator with "Electrigage", is announced by **Sheffield Corp.**, Dayton, Ohio. Instrument includes surface plate block, 26-in. column with rack, and Electrigage (1000-1 amplification, smallest graduation .0001 in.), with electric pickup head mounted on adjustable extension arm. Micrometer is provided for ¾-in. vertical adjustment of pickup head, described as allowing operator wider range or rough comparison measurements. Mounting bracket is adjustable vertically with capacity of 0 to 18 in. Extension arm can be adjusted to bring head to any location, with throat capacity-gaging point to edge of column, 4½ to 11 in., and gaging point to edge of base, 3⅛ to 10 in. Head can be rotated and locked in position with full range of 360 deg., while fine-adjustment knob facilitates setting-up.—AVIATION, Nov., '44.

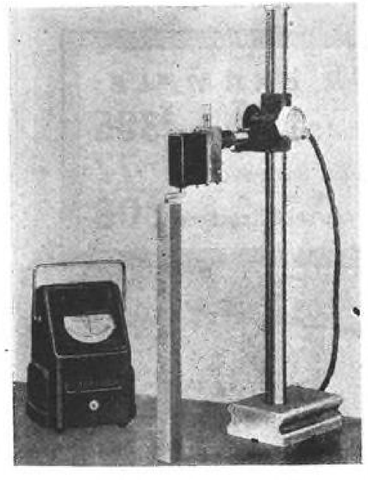

Automatic Washer.....85

Turco Products, Los Angeles, announces new washer for cleaning oil temperature regulators. It is described as capable of cleaning and reclaiming regulators heretofore discarded. Seven



We've engineered and built thousands of small, fractional H.P. blower motors for operating cooling fans for hot spots such as radio tubes and transformers in many types of aircraft and radio installations. Competent engineering and precision manufacturing facilities assure volume production of small motors designed to your exact performance specifications—for any job that requires compact, lusty, dependable power. Tell us your requirements.

Small Motors, Inc.
1312 ELSTON AVE., CHICAGO 22, ILLINOIS
Design • Engineering • Production

different cleaning operations are performed, it is stated, by turning clearly identified valves on front panel. Two cleaning compartments in "Surj" washer, individually controlled, are enclosed in metal cabinet 8 ft. long, 3 ft. deep, and 62 in. high.—AVIATION, Nov., '44.

Portable Kilovoltmeter 86


Shallcross Mfg. Co., Collingdale, Pa., announces new portable 2-scale d.c. kilovoltmeter, Type 722, scales of which cover 0-2 kv. and 0-20 kv.—AVIATION, Nov., '44.

Engine Preheater 87

New 45-lb. aircraft engine preheater, designed to hang on propeller of radial engine, is announced by **Hunter & Co.**, Cleveland. Unit, measuring 18½ x 5½ x 13½ is rated at 40,000 btu./hr., is equipped with canvass hood to enclose engine, and has short connecting ducts for hot and return air. One heater is applied to each engine, and short travel of heat is to assure minimum heat loss. Components are welded steel burner, small blower, built-in fuel tank, and controls.—AVIATION, Nov., '44.

Fixed Limit Gage.....88


Improved "TeBo" fixed limit type gage for bore-gaging is now produced in the Americas by **Standard Gage Co.**, Poughkeepsie, N. Y. Gaging Head is a section of sphere with plating of hard chromium which, with the spherical shape, is described as retaining extreme accuracy over long periods. Spherical head is stated to contribute to frictionless operation and effortless insertion and withdrawal, eliminating jamming. On periphery of head is a smaller projection which is also part of true sphere and which may be adjusted to limit of maximum tolerance to compensate for

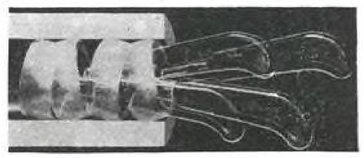

wear by means of two tapered screws, the adjustment of which also increases or decreases "no go" factor within gage's dimensional limits. When bore is between maximum and minimum tolerances, head enters freely and may be rocked on its horizontal axis until stopped by projection. If bore exceeds maximum tolerance, released gage handle drops below bore axis. It will also drop when gage encounters such irregularities as out-of-roundness, taper, belling, ovalness, or faulty finish. Handle is balanced to weight of head. Its position, as well as "feel", indicates condition of bore. Handles are insulated from heat of hand. It is stated that maximum and minimum dia. may be gaged in one operation. Illustration shows phantom view of gage in different positions.—AVIATION, Nov., '44.

Collets and Pads.....89


Zagar Tool Co., Cleveland, announces addition of collets and collet pads to its line, types available being 5-c draw type

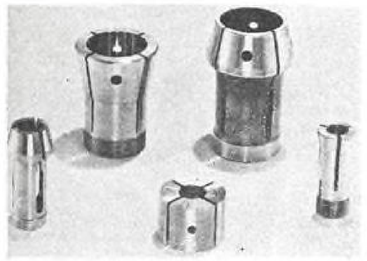

and No. 2 W & S type, as well as No. 6 W & S type master collets, all of which are available in rounds, hexes, or squares. Photo shows collets.—AVIATION, Nov., '44.

Torque Screw Driver.....90

New torque screw and bolt driver described as eliminating over or under-tightening, thread stripping, or material damaging, is announced by **Richmont, Inc.**, Los Angeles. Tool is Livermont

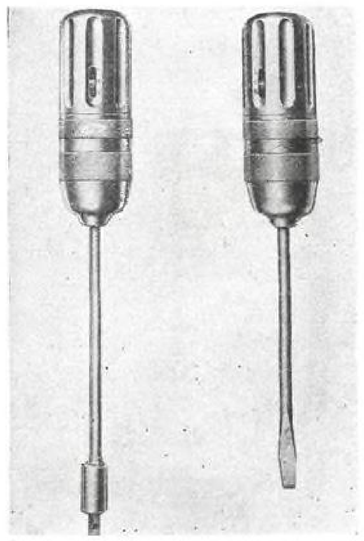

TRADE-IN

YOUR OLD DEARBORN GAGE BLOCK SET



YOU can now turn in your used Dearborn Gage Block sets for reconditioning, and we will send you a brand-new set of Dearborn blocks (rectangular) and allow you a 20% discount on the new set. Yes, these Dearborn sets will be new, not reconditioned, and they will all have the **exclusive Ellstrom feature of Chromium Plated Gaging surfaces that insure longer wearing millionths.**

On all other makes of gage block sets we will allow a 10% discount on a new Dearborn set when you turn in these used sets for reconditioning.

In addition to the discounts allowed, we allow you to hold your old set until we deliver your new Dearborn set.

Write today for prices and delivery.


DEARBORN GAGE CO. 22035 BEECH STREET DEARBORN, MICHIGAN

Originators of Chromium Plated Gage Blocks

"Roto-Torq." Adjustable between 1 in.-lb. and 25 in.-lb., it disengages itself at proper torque, with operation on spring principle. Two models are available, one with screw driver and one with ¼-in. square drive.—AVIATION, Nov., '44.

Needle Bearing for Pulleys.....91

Designed to minimize friction in aircraft pulley applications, new double-row PN needle bearing (see photo) has

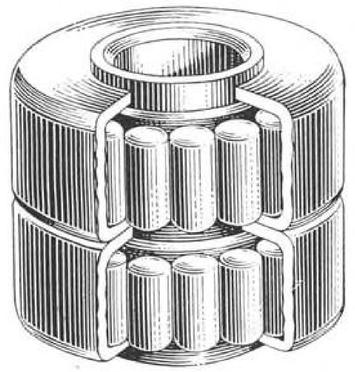


been developed by **The Torrington Co.**, Torrington, Conn. Full complement of small diameter needle rollers is stated to provide capacity to meet all requirements. Small outside diameter is for saving of weight. Enclosed design is stated to retain lubricant without excess grease.—AVIATION, Nov., '44.

Miniature Oscillograph 92

To directly record small values of potential or current, such as output of amplifying equipment, new miniature six-element self-contained permanent-magnet oscillograph is announced by **General Electric Co.**, Schenectady, N. Y. Weighing 10 lb. and enclosed in case measuring 4½ x 4½ x 24 in., instrument consists of three principal systems: Optical system; six parallel galvanometer channels; and photosensitive-material transporting mechanism with internal motor and removable film holder. Wide range of potentials or currents can be recorded, it is stated, by use of appropriate external resistors, instrument transformers, or shunts. — AVIATION, Nov., '44.

Propeller Scale 93

Howe Scale Co., Rutland, Vt., announces new scale designed for static balancing of propeller blades to precision limits. Balance is obtained by



inserting butt end of blade into clamping socket on scale until it touches two contact stops which are set same distance from fulcrum pivot as butt would be from center of hub of propeller shaft. Two lamps are lighted when butt end is properly located. Weights are lifted by lever action, a graduated indicator provides readings, special mechanism locks lever in position, and a relieving device raises fulcrum knife-edges off bearings when blades are being mounted or removed. Six counterpoise weights are provided.—AVIATION, Nov., '44.

Hardening and Quench Table.....94

Induction Heating Corp., New York, is marketing new general-purpose, two-station hardening and quench table used with high-frequency induction heating generators and reported suited to variety of machine parts requiring surface hardening or localized heating. Table has quick change coil connections and can be used as single purpose unit or as general purpose table for various operations on large or small runs. Initial timer

All to your advantage

CANNON QUALITY CONTROL is our investment but you collect the dividends. Let's see how.

We mill all contacts to extremely close tolerances. You get the benefit of low voltage drop. We die cast fittings. You gain strength and save weight. We pioneered the split shell. You (collectively) save hundreds of thousands in the cost of wiring and assembly.

All along the line we take extra care in manufacture. We test, inspect and check again. You have the assurance that, whatever else may fail, the Cannon Plugs you use are dependable.


All that is worth a lot to you isn't it? It's our investment in your good will.

CANNON ELECTRIC


Cannon Electric Development Co., Los Angeles 31, California

Canadian Factory and Engineering Office:
Cannon Electric Company, Limited, Toronto

Representatives in principal cities — Consult your local telephone book

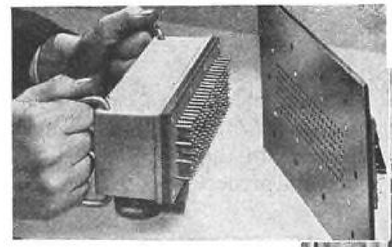


World's largest connector—Cannon DPL with 135 contacts.

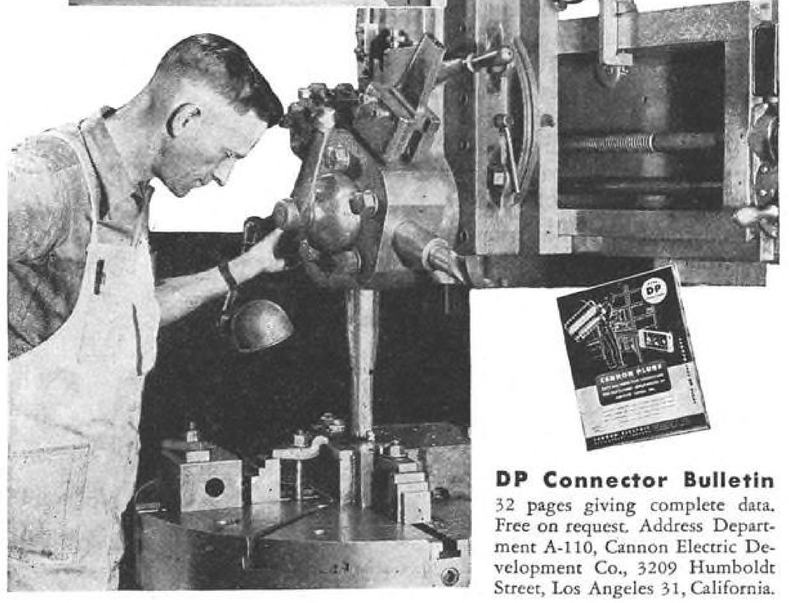


DP Connector Bulletin

32 pages giving complete data. Free on request. Address Department A-110, Cannon Electric Development Co., 3209 Humboldt Street, Los Angeles 31, California.

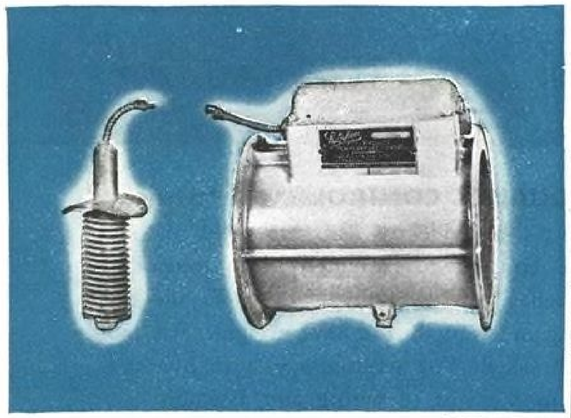

No. 707 Sylphon Temperature Regulator. This instrument comprises a thermostatically controlled valve, which proportions the mixture of hot and cold air admitted to the heater ducts—to maintain a constant temperature in the flight deck and bombardier's compartment.

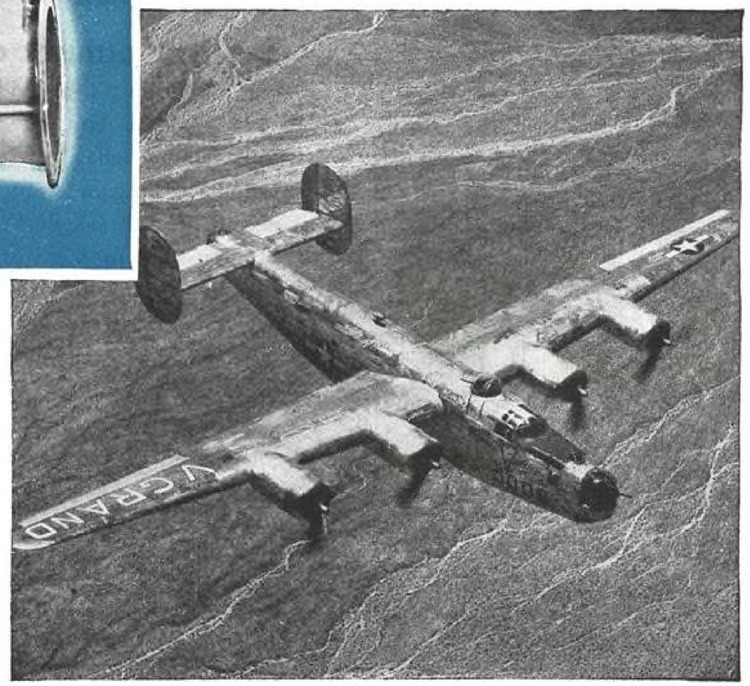

CONTROLLED WARMTH FOR THE "OFFICE"

FIVE YEARS AGO the first B-24 was slowly taking shape in the San Diego plant of Consolidated Vultee . . . and now the V-Grand —Liberator No. 5000, complete with thousands of autographs, has joined its predecessors to speed victory.

One of the many automatic devices that add to the comfort and efficiency of B-24 crews is a Sylphon Aircraft Temperature Regulator. It automatically proportions the mixture of hot and cold air to maintain a constant, comfortable temperature in the bombardier's compartment and control room (known familiarly by airmen as the "office").

This Sylphon instrument is but one of many successful applications of time-proven Sylphon Bellows to aircraft design. Their post-war uses will be universal in the temperature and pressure control fields.

A fully staffed engineering consultant service is available at all times without obligation to users or prospective users of Sylphon Bellows and Bellows Assemblies.

* * *

Inquiries are invited, both for post-war and immediate delivery. Bulletin VA-822 describes many typical Fulton Sylphon applications in the aircraft field.


A new movie film—"The Story of Metal Bellows"—is available to interested executives and organizations.

FULTON SYLPHON

TEMPERATURE CONTROLS — BELLOWS — BELLOWS ASSEMBLIES

THE FULTON SYLPHON CO., KNOXVILLE 4, TENNESSEE


Canadian Representatives, Darling Brothers, Montreal

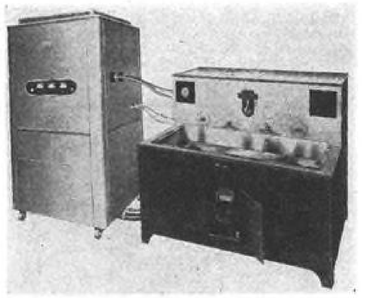

records heating time on new part or job, after which timer action is replaced by selector switch action. Table is also equipped with 3-stage timer automatically controlling heating and quenching positions of cycle, also making possible a slight delay between sequences, it is reported, when this type of treatment is required. Hose connections to quench rings provide spray. Master timer, operating solenoid valve, controls duration of quench. Two rotary drive spindles for gears, reported to assure uniform heating, are controlled by individual selector switch. Other modifications are available.—AVIATION, Nov., '44.


Welding Ground Clamp.....95

Lincoln Electric Co., Cleveland, announces new ground clamp for welding, designed so each jaw connects independently to ground cable, described as assuring proper contact. Unit weighs 1¼ lb., has max. jaw spread of 2½ in., and is rated at 300 amp.—AVIATION, Nov., '44.

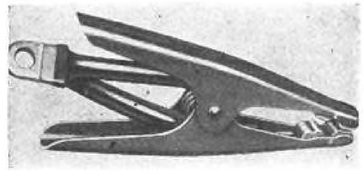

Miniature Socket Plugs.....96

Designed for manufacturers using miniature tubes, socket wiring plugs made by Radio Accessories Div., Star Expansion Bolt Co., New York, are described as providing accurate alignment of socket contacts during wiring, thereby minimizing tube failure due to glass strains.—AVIATION, Nov., '44.

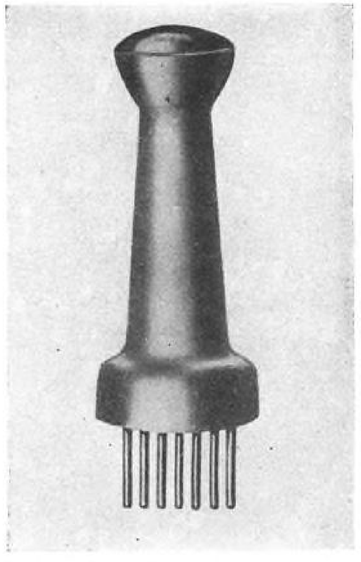


Alloy Boring Blades.....97

Haynes Stellite Co., Kokomo, Ind., announces boring and reaming blades made of company's stellite cobalt-base alloy. Boring blades are used for rough and finish boring operations on cast iron, malleable iron, brass and bronze, and for rough and semi-finish boring operations on steel. Reamer blades are used chiefly on cast iron, although it is stated they have been successfully used on malleable iron, brass, and bronze. Blades are available in 98M2 and Star J-metal, to users' specifications — AVIATION, Nov., '44.

Tool Post Turret.....98

New tool post turret for bench lathes, specially adapted for cutting-off operations, is announced by Crozier Machine Tool Co., Hawthorne, Calif. One side of block is channeled to receive standard beveled-section cut-off blade, with support at top by channeled bar, providing maximum bearing surface for locking bolts. Holder does not overhang.—AVIATION, Nov., '44.

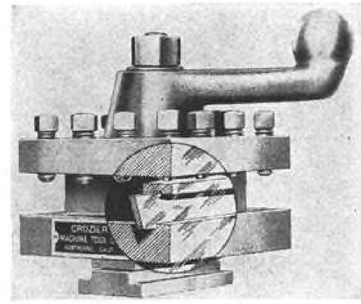



Aluminum Forgings all the way up to 8'6" propeller blade. The development of Aluminum Forgings by Wyman-Gordon for the war will give to post-war industry new production impetus through less weight, plus forging strength.


Wyman-Gordon

Forgings—Laboratory Controlled

WORCESTER, MASSACHUSETTS

HARVEY, ILLINOIS — DETROIT, MICHIGAN

SPEED UP PLANE SERVICING

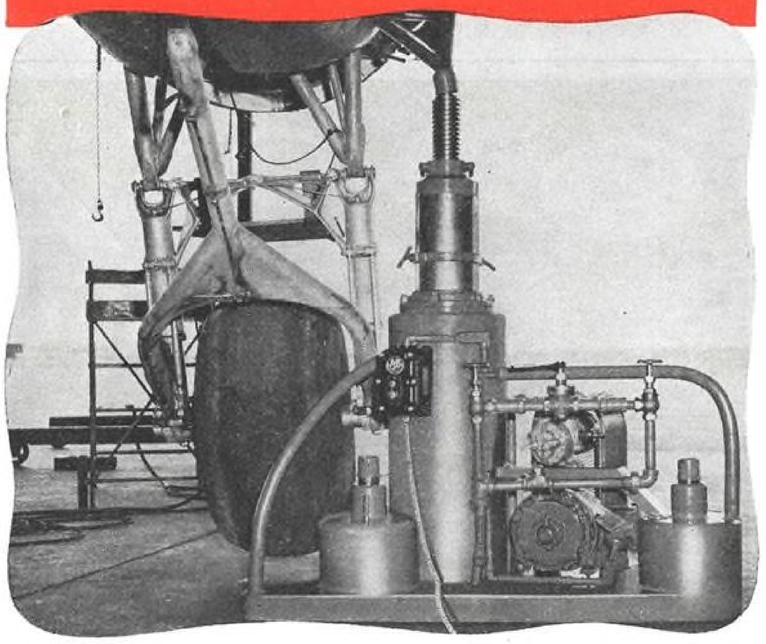

—with a **GLOBE *portable* PLANE HOIST**

YOU SAVE TIME AND WORK a dozen ways in plane servicing and inspection with this Globe Portable Plane Hoist.

Placed under wing jacking pads, the Globe Hydraulic Hoist "free wheels" the plane in a moment, for servicing of landing gear mechanism and tires. Can also be used to "flight position" plane for checking and calibrating instruments, armor, and controls. It gets the jobs done QUICKER, and BETTER.

Send today for illustrated circular on the full line of Globe Plane Hoists, and the many ways in which they can save you time and money.

Write!


Write for illustrated Bulletin AV-3 showing newest types of Globe Plane Hoists for your maintenance and production needs.

GLOBE HOIST COMPANY
Philadelphia 18, Pa. . . . Des Moines 6, Iowa

GLOBE HYDRAULIC PLANE HOISTS

Telescoping Gages.....99

Brand Tool & Supply Co., Los Angeles, announces introduction of new telescoping gages, made in four sizes: ⅛ to 12 in.;

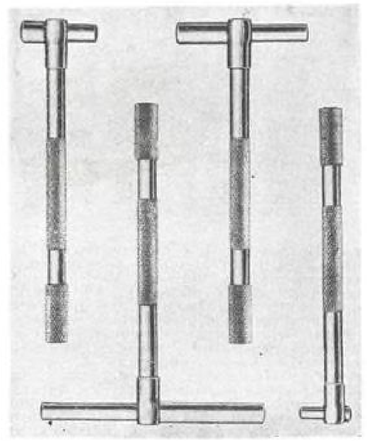

¼ to ¾ in.; ¾ to 1¼ in.; and 1¼ to 2⅛ in. They may be had in sets of three gages from ⅛ to 2⅛ in.; or sets of four, from ⅛ to 2⅜ in.—AVIATION, Nov., '44.

Distributor Tester.....100

"Isotronic - Distributorgraph" Model 500, manufactured by Lanagan & Hoke, Philadelphia, is new distributor tester. Accompanying illustration shows distributor positioned in adjustable arm and connected to variable speed motor for rotation under rheostat control at any speed to 2,500 rpm. Movable scale ring, graduated in degree for either direction, surrounds drive shaft, and fitted in housing is power pack for operation of tubes. Tachometer shows rotating speed, and switch selects direction. Vacuum pump and gage are included for application to vacuum-advance mechanism. Disk in center of panel rotates with distributor shaft and carries two electronic tubes, red and blue, mounted at 180 deg. to each other around disk, and they light when contacts close, lighting occurring at same position on circular scale if distributor is in good condition. Tubes produce red light bar at each firing-interval point, red light blanking out blue light. A worn camshaft or bushing will light blue tube out of phase with red, so both red and blue bars are visible. Degrees in arc between two gives reading of the error. Actual number of degrees of cam travel during which points are both open and closed are read by turning switch and noting reading between light bars on scale.—AVIATION Nov., '44.




Hole Punching Technique 101

Horizontal Type-H hole punching units, made by Wales-Strippit Corp., N. Tonawanda, N. Y., are offered for hole punching in flanges, angles, container sides, and similar-shaped work. New technique of punching holes in sides, instead of in top of flat surfaces, is made possible, it is stated, by designing unit so that punch moves horizontally instead of vertically.—AVIATION, Nov., '44.

Lever-Operated Chuck 102


"Jiffy Jig," new lever-operated chuck made by Monarch Governor Co., Detroit, is designed to be set up in either horizontal or vertical position and, when either open or closed, to hold collet to zero axial movement. Chuck consists of cap, base, and operating lever, taper on cap conforming to that of collet. With proper-size collet in place, cap is screwed down on base until collet opens and

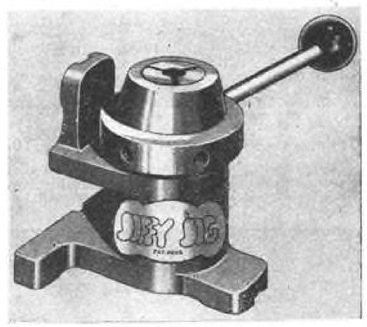

closes as desired. Operating lever is then screwed into convenient location, and chuck is ready for use. Chuck may also be used in conjunction with automatic spring ejector, and Warner Swasey #2 collets may be substituted.—AVIATION, Nov., '44.

DRILL PRESS HEAD.....103

New drill press turret head holding three tools is announced by Universal Engineering Co., San Diego, Calif. Attachment is made by removing chuck

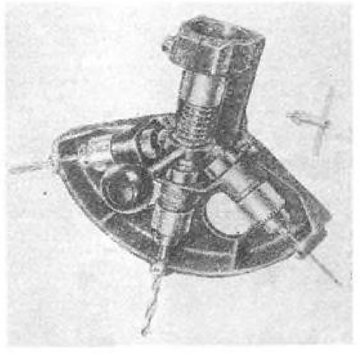


and depth gage and slipping bracket over quill. Capacity of head is ¼-in. drill size, and Jacobs chucks are furnished. Light movement of indexing lever shifts position of tools.—AVIATION, Nov., '44.

Self-Flaring Coupling 104

Providing a union effect, self-flaring coupling for plastic tubing, made by Packless Metal Products Corp., New Rochelle, N. Y., is described as forming its own flare without thinning or splitting ends and without preheating of plastic. Coupling is for tube sizes ¼ to ⅝-in. o.d.—AVIATION, Nov., '44.

Air-Operated Controllers.....105

New series of indicating, air-operated control instruments, for controlling temperature, pressure, vacuum, liquid level, and humidity, is announced by The

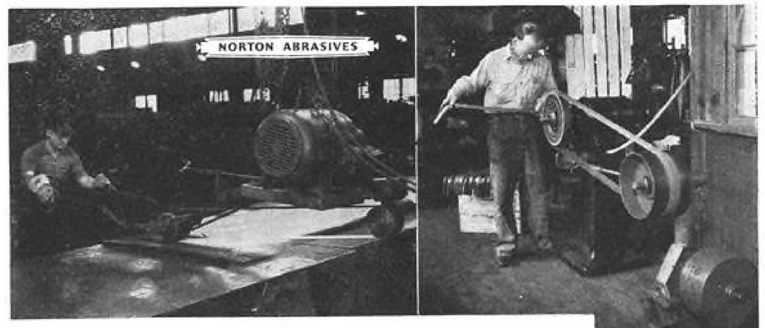

TIME AND MONEY SAVERS

Swing Frame Grinders, Idler Backstands using METALITE CLOTH *Belts*

The pressure for speed in turning out war materials greatly accelerated the installations of such machines—Swing Frame Grinders and Idler Backstands, both employing fast-running abrasive belts.

But long before that, increasing numbers of plants had reaped the many benefits inherent in these modern mechanical aids that do better work faster and at much lower costs than old methods. In some cases four times the output, in others at a reduction of 75% in time.

These records forecast further and faster adoption of such time and money saving methods which could well have the prompt attention of all mechanical and purchasing personnel.

We will gladly supply information on the equipment (which we do not sell) as well as on the specially designed Metalite Cloth Belts (which we do).

Just a few lines on your letterhead.


Offer valid only in U. S. A.

BEHR-MANNING · TROY, N.Y.
(DIVISION OF NORTON COMPANY)
RELIABLE COATED ABRASIVES SINCE 1872



ANOTHER EXAMPLE OF **YOUNG** AVIATION SERVICE

OIL COOLERS for CLIPPERS

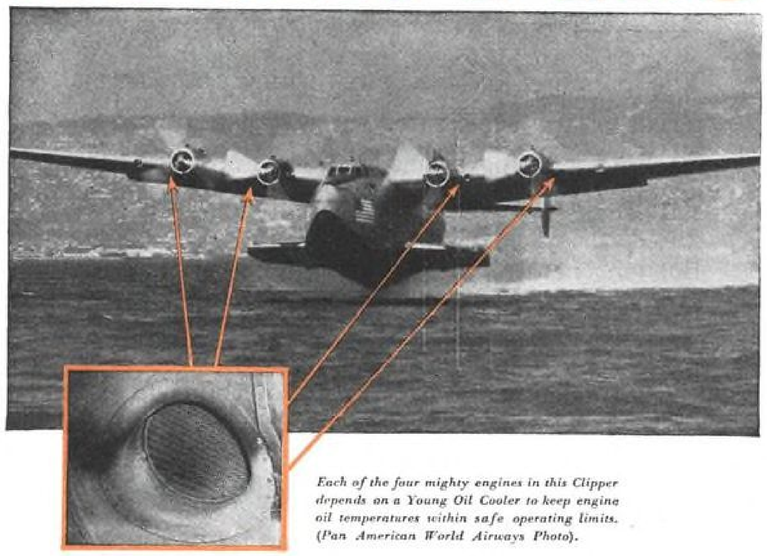

Each of the four mighty engines in this Clipper depends on a Young Oil Cooler to keep engine oil temperatures within safe operating limits. (Pan American World Airways Photo).

Young is proud to have had a part in spanning the skyways of the world. Experience that began thirty years ago made it possible for Young Heat Transfer Products to contribute to the amazing development of commercial aviation, climaxed by giant Clipper ships encircling the globe. When war broke out Young engineers were ready! They produced equipment that could stand the punishment of fast flying, long trips, furious fighting. They did more . . . they developed automatic accessories and controls to regulate temperature and flow of coolants for quick take-offs, power dives and steep climbs, thus freeing pilots and crews for concentration on combat. And now, though still deep in war work, Young engineers are finding time to put thought on the heat transfer problems of the postwar world. Consult with them, without obligation.

YOUNG RADIATOR CO., Dept. 294-L, Racine, Wis., U.S.A.


Distributors: Pacific Airmotive, Burbank, Cal. Aircraft Steel & Supply Co., Wichita, Kansas

YOUNG

BUY BONDS · PRODUCE MORE · SALVAGE SCRAP · WIN THE WAR

HEAT TRANSFER PRODUCTS

Oil Coolers • Gas, Gasoline, Diesel Engine Cooling Radiators • Intercoolers • Heat Exchangers • Engine Jacket Water Coolers • Unit Heaters • Convectors • Condensers • Evaporators • Air Conditioning Units • Heating Coils • Cooling Coils • and a Complete Line of Aircraft Heat Transfer Equipment.

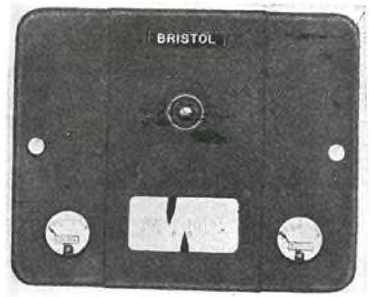

Bristol Co., Waterbury, Conn. Operating on free-vane principle of automatic control, they have throttling range of from ½ to 15 percent with an adjusting mechanism stated to enable changes without use of tools. Model 93 is a direct set instrument for controlling any value within its range by setting control pointer, and it can be changed from reverse to direct action, or vice versa, by finger action.—**AVIATION, Nov., '44.**

Countersink Gage **106**

Countersink gage designed to check machine countersinks for size and shape for grinding and sharpening, as well as



finished countersunk screw adapters, is offered by **Dayton Rogers Mfg. Co.**, Minneapolis. Five different countersink angles are included, with two gage view profiles in each instance.—**AVIATION, Nov., '44.**

Soldering Stand **107**

Improvements in soldering stands are stated to be embodied in Model SS10 unit, made by **Ess Specialty Corp.**, Bergenfield, N. J. New features are stated to permit maximum freedom for work




passing, enabling operator to focus attention on joint by means of magnifying or plate glass window, with protection for operator from fumes. Stand is supplied either with bracket for table mounting or with its own wood base. Fume stack is 3 x 9¼ x 32 in.—**AVIATION, Nov., '44.**

Cement-Floor Treatment **108**

"Syncrete Concentrate" is new liquid treatment for cement floors stated to penetrate pores, harden to rocklike mass, and reinforce binder, eliminating dust and preventing wear. Maker is **Synthex Products Co.**, New York.—**AVIATION, Nov., '44.**

Taper Attachment **109**

New taper attachment reported to make taper turning, boring, and threading as easy as straight line tool operation, is announced by **Master-Taper Co.**,

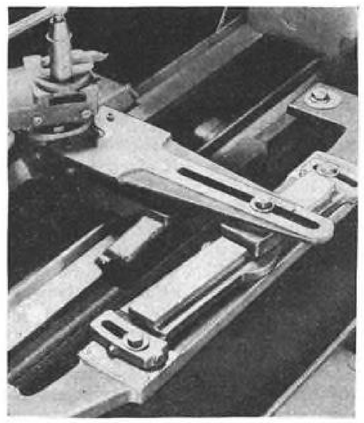

Chicago. For use in any position on lathe, maker states it does not interfere with straight turning. Sliding fixture has straight gibs. Graduations are in inches at one end, and in degrees at other end of swivel bar. It tapers up to 3½ in. per ft., 16½ deg. max. in either direction, and 7½ in. in length at one setting.—**AVIATION, Nov., '44.**

Helicopter Future?

(Continued from page 117)

of the machine. Helicopter research is practically nil compared with the vast amount that has been done on the conventional airplanes. As the fund of knowledge grows, the entire outlook cannot but change accordingly.

The helicopter comprising essentially a single main rotor with torque-compensating tail rotor is but one type. Research may reveal other types as being ultimately more practical—or it may develop some completely undreamed-of mechanical means of doing the job that would make our present thinking as out-of-date as a 1910 automobile.


Therefore, we arrive at two fundamental protective phrases: (1) "On the basis of present knowledge," and (2) "with the present type of machine." Performance estimates made with those reservations may be of interest.

Thus far, the Sikorsky R-4 model has achieved a speed surpassing 80 mph. in level flight. This is not fast, and a glance at a picture of the craft will reveal, even to an untrained eye, many places where speed could be increased by better streamlining. We have reason to believe that helicopters will shortly exceed 110–120 mph.

Going back to Mr. Sikorsky's *Atlantic Monthly* article, we find a prediction of 140 mph. for the more distant future. But that is as far as common sense permits us now to think. Research, or a different type of machine, may extend this limit. If so, we may consider it an unexpected dividend. In the meantime, the speed in hand can and will have plenty of useful applications.

As for load, we shouldn't seek too much. A capacity of 8 to 12 passengers appears well within range. An ultimate of 20 passengers is perhaps a reasonable guess. But I am not revealing any secrets when I say that, for best performance, a helicopter should not carry much more than 10 lb. per hp. (The fact that we have done considerable flying with more than 14 lb. per hp. does not alter the basic truth of this statement, because in these instances we sacrificed other good qualities in the interest of load.) About 6 or 7 of those 10 lb. will be structural weight. Therefore, we end up with a balance of 3 or 4 lb. per hp. that can be applied to passengers, fuel, oil, and baggage.

Twenty passengers, plus baggage, weigh about 4,000 lb. Adding the fuel and oil necessary for a reasonable flight, we deduce that somewhere around 2,000 hp. will be required for a 20 passenger

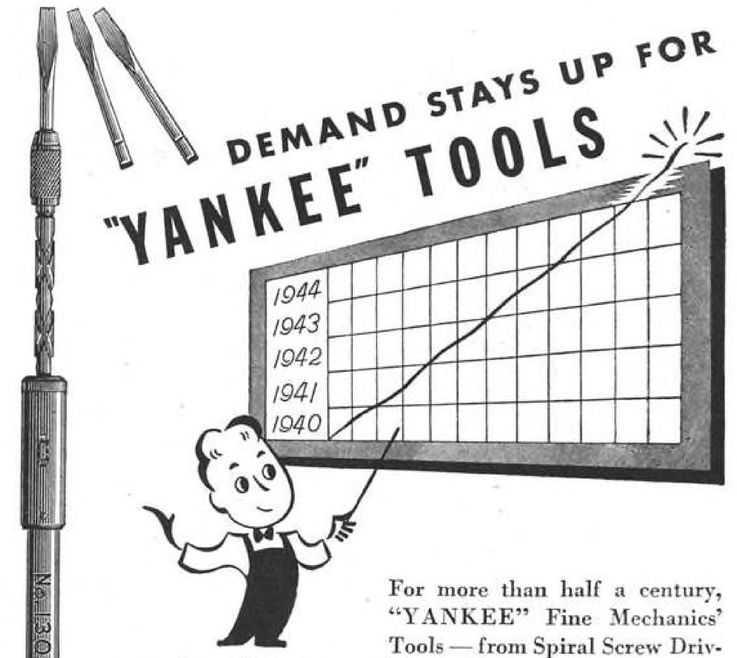

For more than half a century, "YANKEE" Fine Mechanics' Tools — from Spiral Screw Drivers to Tap Wrenches and from Automatic Drills to Bit Braces — have been doing the work they were *designed* to do: saving time, energy, and costs on countless different jobs. "Yankee" ingenuity means faster and easier work. "Yankee" quality means dependable and rugged performance. Remember this when "Yankee" Tools, having done their bit in the shops of war, are again available for the jobs of peace.

Order from your industrial supply distributor, or write North Bros. Mfg. Co., Dept. AV-1144, Phila., Pa.

"YANKEE" TOOLS

make good mechanics better

North Bros. Mfg. Co., Phila. 33, U. S. A.

Established 1880

ship. A 2,000-hp. helicopter may not be impossible, but it is certainly a long step ahead of what we have so far achieved. Therefore, we are quite content to establish that as our first goal—let come what may thereafter.

Non-stop flying range is, of course, a factor of load. If you wanted to carry the equivalent of 20 passengers in gasoline, you could fly solo far enough to get quite bored with yourself. On the other hand, you could probably carry 30 or more people for a fairly short flight, by the simple expedient of not filling the gas tanks so full. When we speak of load, however, we automatically figure on giving the helicopter enough gas to fly for 3 or 4 hr.—which means somewhere around 300 to 500 mi. non-stop. This is comparable to standard airplane practice, and a helicopter with such characteristics would be a useful vehicle.

So, "on the basis of present knowledge, and with the present type of machine," we feel confident in prophesying satisfactory performance in speed, load, and range. If you don't consider it satisfactory, you are entitled to await the results of the next several years—or do your own guessing.

What about that question of controls? One technically qualified commentator has stated that operating the helicopter requires a greater degree of skill than an airplane, and far greater than a car. He estimates that it will take between five and ten years of further study before the controls will become sufficiently simplified to make the craft suitable for public use.

I am in no position to argue the first part of his statement—if he cares to suggest that I am skillful. I bow a grateful acknowledgment. But I must take issue with his conclusion. There are only two difficulties that stand in the way of simplifying the present controls: First there is the need for applying our entire efforts in other directions; Second, the need for deciding whether the ultimate helicopter controls should be more like those of an automobile or of an airplane. Once the latter decision has been reached, and once we can spend a little time on the matter, I believe that great simplification could be introduced almost overnight.

Persons accustomed to automotive thinking often ask, "How many miles do you get on a gallon of gas?" But in aviation, "miles per gallon" is changed to read "gallons per hour." If a certain airplane uses 10 gal. of gas an hour, and cruises at 120, it will be going 12 mi. to the gallon. But, if it hits a head wind, or rides along on a tail wind, the gas consumed per mile may be greatly altered. That, of course, is why aviation does not think in automotive terms, but refers instead to the gasoline used every hour, regardless of distance covered.

An engine developing a certain power will burn a certain amount of gas per hour, whether it be in a helicopter, an airplane, or a power boat (atmospheric conditions being equal). Therefore, before deciding how economical a helicopter will be, we have to decide what horsepower we are planning to use.

The chances are that a good two-place helicopter will have about 200 hp. (this would be about a 2,000-lb. machine, including passengers, baggage, and gasoline). It will probably cruise about 100 mph. (maybe faster when we learn more) and burn about 11 gal. of gas for every hour in the air. On the average, this gives us about 9 mi. to the gallon.

Before a man makes too many mental comparisons with his 15-mi.-per-gal. automobile, he should bear in mind that when he drives somewhere by car, he often goes several miles farther than the distance as the crow flies. So the helicopter, cutting 'cross lots, will save somewhat on the actual mileage of the trip.

He should bear in mind also that his car will be running about three times as long as the helicopter for any given trip—which means three times the wear and tear on the mechanism. And, finally, he should consider the fact that for each mile his car travels, he is paying 4c. for tires—which will probably never wear out at all on a helicopter.

Taking all these things into consideration, the comparison is not so unfavorable as it may at first appear—and by the time one charges off a little for time saved, for enjoyment, and for flexibility, the scales swing definitely toward the helicopter.

Why does the two-place helicopter require nearly twice as much horsepower as a two-place airplane? The answer lies in the fundamental truth that you cannot get something for nothing. If you are going to want zero airspeed, vertical takeoff, and hovering at places that are 6,000 or 8,000 ft. high, you must have the power for it. Actually, I am not particularly concerned on this point, because I believe the utility of the helicopter will justify the larger engine.

Having thus brought out in the open many negative points about the helicopter's immediate future, the conflict of Hope vs Fact many lead us to wonder just what the postwar era does hold in store. Speaking personally, I became associated with the helicopter in the begining because its horizons appeared unlimited. The further we proceed, the more the outlook expands. Let me conclude with some sober crystal-gazing:

At the present time, and for the immediate future, the helicopter must be considered a military weapon—just like refrigerators, radios, automobiles, and everything else that you cannot buy now. How soon they may again appear on the civilian market will be determined solely by the progress of the war—and my crystal is clouded in this regard.


At the conclusion of hostilities, we shall emerge with some helicopter models, evolved or evolving, that will readily lend themselves to many specialized uses. They will cost a lot of money—I won't estimate how much, because even if dollar values could be relied upon, the price is heavily contingent upon the quantity of production that will have been achieved, and this in turn largely depends on the duration of the war.

Nevertheless, it is a safe assumption hat helicopters will be expensive, and therefore restricted to particular jobs where initial cost is not a primary factor. They will probably be operated by mining and oil companies for prospecting areas that were hitherto inaccessible, such as the jungles of South America or the waste lands of Canada; by geologists and explorers; by airlines and bus companies creating new routes or providing more adequate coverage on old ones; by business establishments (hotels, newspapers, department stores, etc.), capitalizing on the up-to-the-minute service that the helicopter can render; by concerns engaged in crop-dusting, surveying, aerial photography; in humanitarian enterprises for floods, blizzards, hurricanes, and disasters of all sorts; and finally by government agencies for police work, forest and fire patrol, life saving, and emergency missions of a thousand unpredictable types.

These are only a few striking examples of the jobs for which the helicopter of today is entirely suited and in which it would be economically practical almost without regard to what its original purchase price would have to be.

Bit by bit, production quantities and practices could develop to the point where costs would begin to drop. Other buyers could then afford them for less specialized purposes. As these demands are met, prices could again be reduced, and once the snowball was started, it could gather momentum surprisingly quickly, bringing costs down to the point where the helicopter might at last be considered on the "public market."

Youre invited...

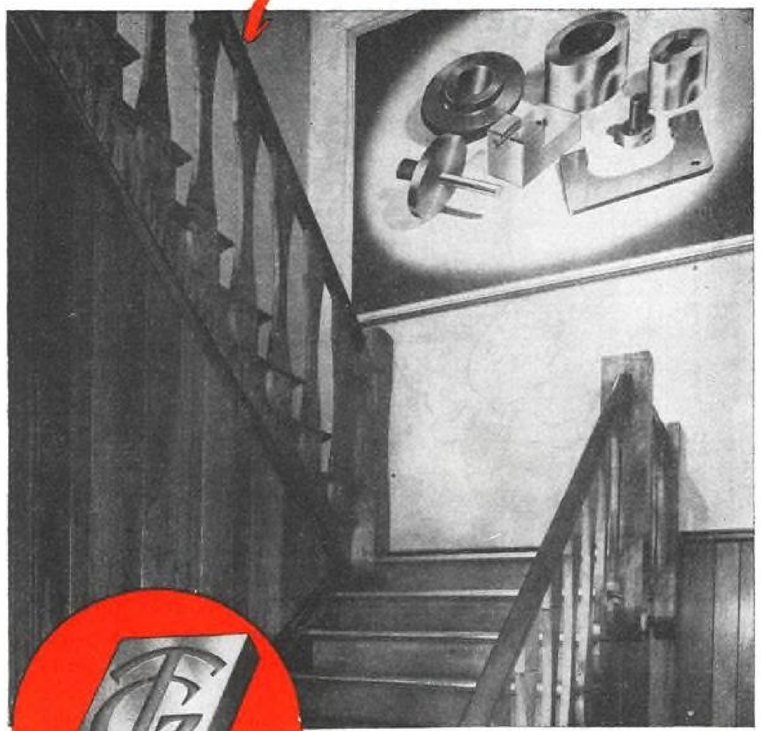

. . to inspect the home of TURNER gauges

The next time you are in this vicinity we invite you to take a trip through our plant and offices which production experts call ideal for the manufacture of precision equipment. Investigate the well planned working conditions which make the perfection of Turner Gauges possible.

The Stamp of Precision

TURNER BROTHERS

TURNER GAUGE GRINDING COMPANY
2625 HILTON ROAD • • FERNDALE 20 MICHIGAN

3 New FEATURES IN ZEPHYR ANGLE DRILLS



THUMB REST . . . makes it easier to hold drill with less fatigue to operator.

ADDITIONAL BALL AND NEEDLE ROLLER BEARINGS . . . non-friction bearings at *all* points.

GREASE RETAINER RINGS . . . hold the lubricant inside the drill . . . keep drill from running dry.

THESE ANGLE DRILLS RUN COOLER, LONGER UNDER HEAVIER LOAD

Again, Zephyr Angle Drills show the way! Add these three new features to all their other advantages and you have the finest drills available:

- Die cast ribbed body
- Non-slip thumb rest
- Spindle is radial and thrust ball bearing mounted
- Ball and needle roller bearings on drive shaft
- Heat treated bevel gears
- Grease retainer rings assure leak-proof operation
- Precision ground spindle and drive shaft
- All bearings and parts interchangeable

Order and compare . . . 45°, 90° and 360° models available.

WRITE FOR LATEST CATALOG



ZEPHYR
HIGH QUALITY PRECISION TOOLS

ZEPHYR MANUFACTURING COMPANY
Factory and Head Office
201 Hindry Avenue, Inglewood, California
Dealers located in all principal cities.



Acres of engines for the new B-29 Superfortress are rolling down the production lines at the Chrysler-Dodge Chicago plant. This is one of the plants making the now famous 2200 H. P. Wright Cyclone engine, powering the mammoth bombers which are setting the rising sun.

Each of these engines is given a test cell break-in run. It is then torn down, every part given a thorough inspection, and sent back to the test cell for another test run. Then, sent to an assembly point, it becomes part of the power which will clinch victory for the United Nations.

Wolf's Head Aviation Oil is used for the critical break-in runs of these Superfortress Cyclones. Wolf's Head Oil Refining Company, Inc., Oil City, Pa. — New York 10, N. Y.

WOLF'S HEAD

100% PENNSYLVANIA

AVIATION OIL

P.G.C.O.A. Permit No. 6

The first two steps, though—military use and specialized commercial use—must of necessity cover a period of years. The period may be somewhat reduced if post-war markets justify tooling up for a pre-established output (10,000, 20,000, 50,000 per year), counting on the sales department to clear the shelves. This would be a new experience to aviation, which has generally not produced much ahead of orders. But even if such a step were taken, it would still be several years after the war before a medium-priced helicopter became a reality. And we still would not have approached those "hundreds of thousands" that Mr. Sikorsky mentioned.

In any such forecast of the future, there are so many intangibles that it is safest to indicate them clearly—and then retire to await their ultimate and inevitable solution.

One thing is certain—the helicopter is here to stay. It will have its ups and down, its protagonists and antagonists. But it has unalterably become a part of our future existence. How soon John Doe, as an individual, may benefit from its services is beyond the power of anyone now to prophesy. But a few years after the war, a more clearly defined answer should be at hand.

Fit As Its Finish

(*Continued from page* 153)


remover of this type are low boilers. The use of low pressure equipment enables the worker to confine the remover to a localized area, eliminating dangerous overspray and too rapid atomization.

Complete safety equipment such as face shields, synthetic rubber gloves, and hand lotions are provided, and their use is insisted on by the safety engineer.

After the paint is stripped and the surface is ready for cleaning prior to phosphotizing, a cleanup solvent is used. This is made up of acetone, methyl-chloride, and a small amount of sulphinated mineral spirits. For several reasons, this solvent should be applied with rags. First, acetone and methyl-chloride, being low boilers, atomize too rapidly. The cleaning action of these two solvents would be wasted if sprayed. Secondly, the sulphinated mineral oil, which is a higher boiler than the other two solvents, would settle on the surface if spray equipment were used. Synthetic rubber gloves for this hand cleaning operation are a "must."

After a thorough clean-up, the surface should be free of any organic film and in perfect condition for the phosphotizing process which involves the use of a phosphoric acid-type preparation, reduced with equal parts of water. Clean lint-free rags are used, and the areas are worked from the bottom up so as to prevent streaking. The solution is left on the surface for a period of 5 to 10 min. A clear water rinse follows, then the surface is dried. The result should be a clean water-break-free surface that is coated with a film of aluminum phosphate. There is no danger whatever of the solution remaining active or of removing the anodic film.


Too much praise cannot be given this

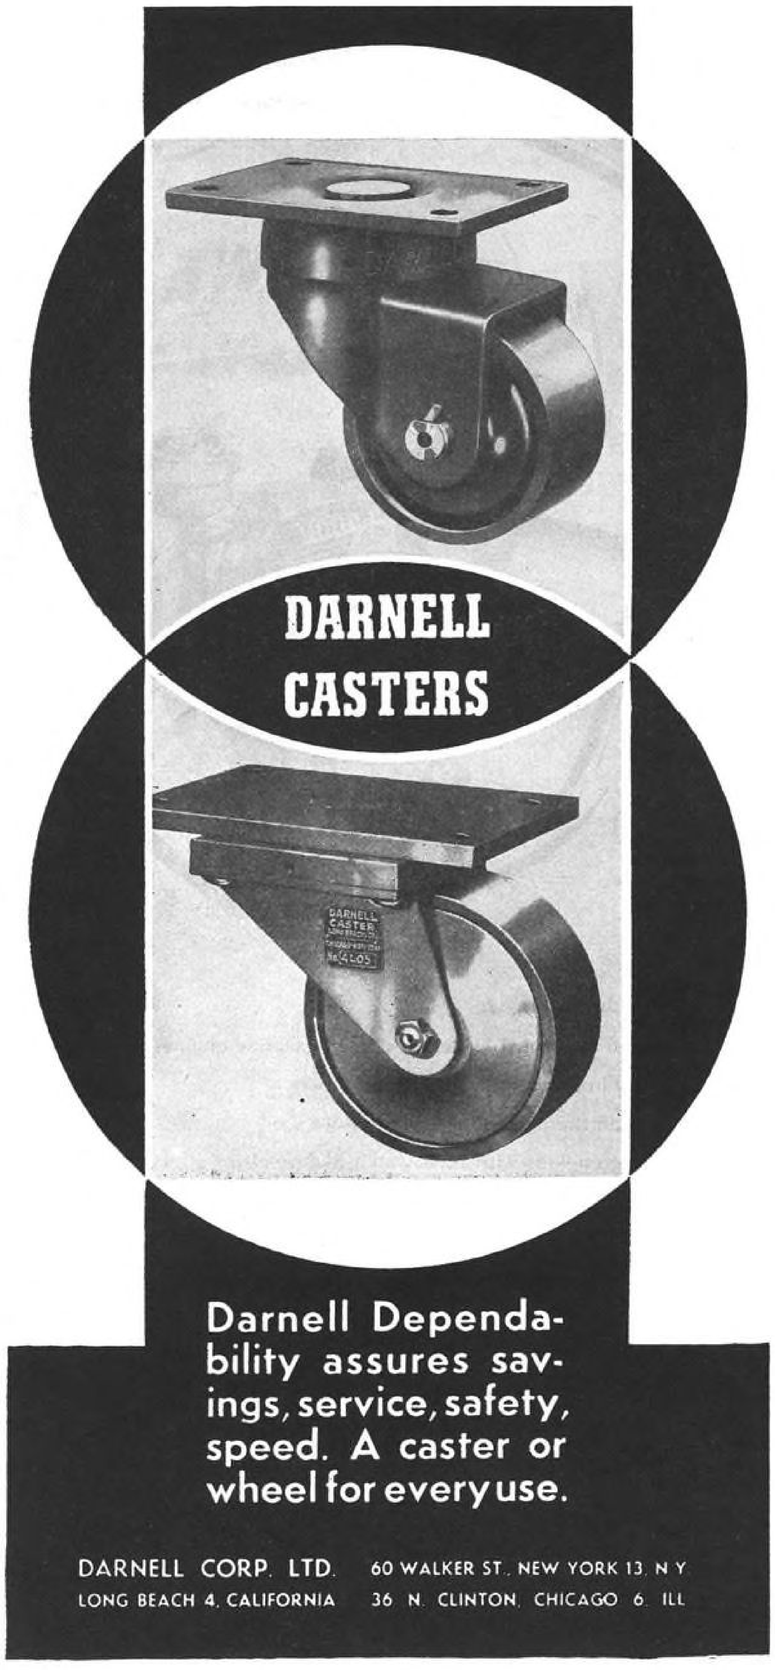

Darnell Dependability assures savings, service, safety, speed. A caster or wheel for every use.

DARNELL CORP. LTD. LONG BEACH 4, CALIFORNIA

60 WALKER ST., NEW YORK 13, N.Y.
36 N. CLINTON, CHICAGO 6, ILL.

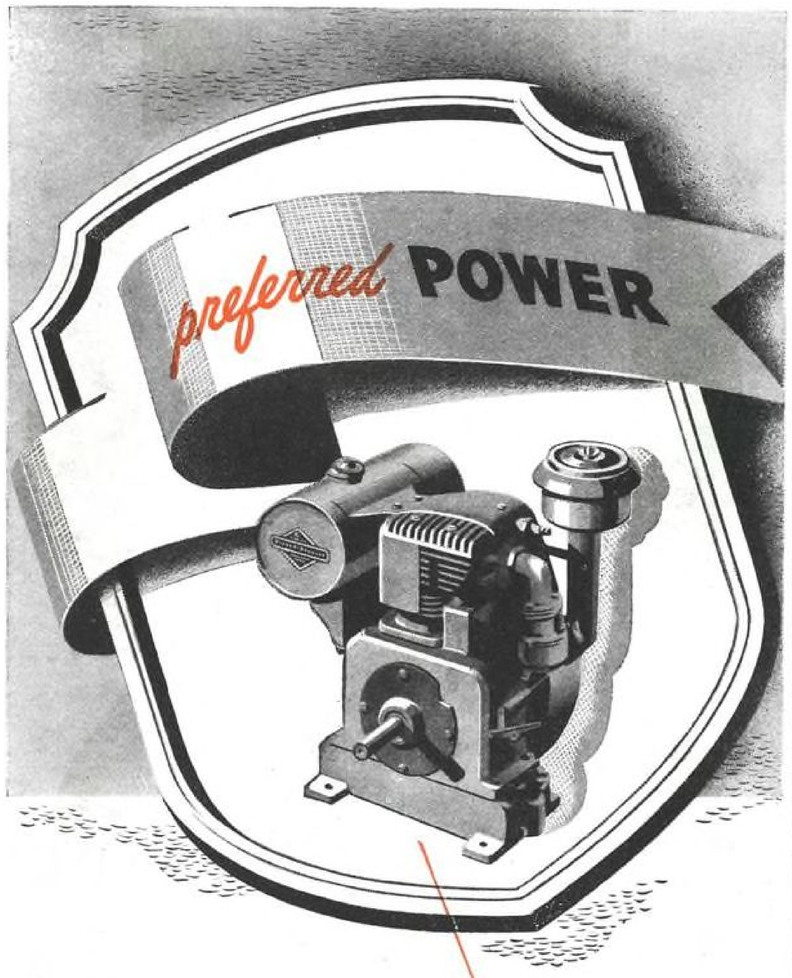

That's the "rating" for
Briggs & Stratton 4-cycle, air-cooled gasoline engines—
leaders in the field . . . Preferred power—
based on the performance record of over 2,000,000
of these engines with their watch-like precision . . .
the result of twenty-five years of continuous production,
plus constant research and refinement.

Air-Cooled Power

4 CYCLE BRIGGS & STRATTON GASOLINE ENGINES

Preferred Power, by manufacturers, by distributors and dealers, by owners and users . . . for hundreds of uses and applications . . . because of *trouble-free performance,* easy starting, and economy of operation. Because of year after year of dependable service with minimum care or attention. We are now ready to help you plan for peacetime production of gasoline powered equipment, tools and appliances.
BRIGGS & STRATTON CORP., Milwaukee 1, Wisconsin, U. S. A.

type of material and method of surface preparation. We believe that it is the main reason for our success in maintaining a sound finish for an almost indefinite time.

From this point on, a quick follow-through with the finish is important. Bare hands should not come in contact with the surface.

But before discussing the type of finish material we use, we might examine an actual twelve-month experience with our preparation. A company flying boat plying the North and South Atlantic air routes, encounters all types of weather at every temperature. In flights to Central and South America and Africa, both the freezing weather of the North and the tropical sun and humidity of the South are encountered. In addition, the bottom of the plane's hull is subjected to great friction and frequent pounding in landing and taking off.

Weight, or rather its absence, is an important factor when fast flying schedules are to be maintained. This is as much a responsibility of the aircraft painter as it is that of the aircraft designer. All of the points—weight, heat, humidity, efficient operation, and the meeting of maintenance schedules—were considered in our decision to take a radical step in the type and application of protective and camouflage coatings.

Ordinarily, after a surface is primed with a coat of Spec. P656A zinc chromate primer, lacquer Spec. M-485 is applied. This latter material is popular because of its speed of drying and ease of application. It may be ideal for production-line work, but our experience shows that it is not satisfactory for fleet maintenance. In line with wartime exigencies, finishing materials have been made more in accordance with the wants of the manufacturers than with those of fleet operators.

Although the paint department has the very latest equipment for controlling humidity, nevertheless, we must paint the aircraft itself out on the huge hangar floor. We only have semi-control over atmospheric conditions there, and at times the outer skin or surface sweats. This, of course, is caused by temperature inside the aircraft differing from that on the outside, plus humidity. Unfortunately, the hangar is located in an area where the humidity is frequently higher than desirable.

At times, we also have found some difficulty in obtaining a satisfactory zinc chromate primed surface. While we are not operating on a production line basis as in factories, we still must meet stringent schedules and are 100 percent on a war basis.

At this point, it may be well to consider briefly the zinc chromate primer and several methods of application. We have always used the aircraft specification P27B or P65A primer. Actually, we found variance in the compositions of different manufacturers, so to keep on the safe side, drying time is kept to as wide a margin as schedules wil permit, which might be from 30 min. up to 24 hr. Through research and the opportunity to observe factory finishes on our aircraft, we have gained considerable knowledge about zinc chromate. We also realize that the average aircraft manufacturer is forced to farm out different assemblies to outside contractors, which makes it difficult to control the finishing standards.

Application of a correct coat of zinc chromate primer is dependable to a great extent on proper mixture. The proportion of reducer to pigment must be accurate. If a batch is mixed for use over a long period, it is difficult to maintain this proper proportion, because the addition of solvents to off-set the evaporation is sometimes not too accurately done.

For this reason a small, agitated pressure tank, with facility at the bottom of the tank for drawing off only the amount of primer needed for the particular operation, is one piece of equipment that is a big help in accurately maintaining the proper proportions in zinc chromate primer.

Application of a coat of zinc chromate primer is an operation that requires skillful handling of material and equipment. Too many times we have found it necessary to remove the finish from parts of the aircraft that were factory painted and of comparatively recent manufacture. We have "miked up" flaked paint so applied, which gave a reading that varied between 18 and 19 mills. Observations of the chipped sample disclosed that this consisted of about 90 percent zinc chromate primer.

Primer-less Finish

However, by elimination of zinc chromate primer in our finishing process we can credit the saving of this weight, which, in profitable airline operation is a most important factor. In short, after numerous hours spent in removing unsatisfactory chromated surfaces, we finally devised a technique of finishing our flying boats that we believe is foolproof, a method which eventually led to our abandoning entirely the use of zinc chromate primer on the outside surfaces of our aircraft.

Now, after the phosphotizing process is complete, we apply a cross coat of an alkyd resin non-specular enamel, similar to Spec. AN-E-7. The material is reduced approximately 50 percent and is applied with a pressure tank spray unit to a large area at a working pressure gaged according to conditions. For a touch-up we use a siphon cup. Application of this material resulted in a smooth finish less than .0015 in. thick.

We are not recommending or suggesting to anyone, but we have found our methods answer our own problems satisfactorily. We feel that no laboratory testing of flying boat finishing materials can be as severe as the actual day to day test that these materials are subjected to in routine operations. The period of time that our finishing methods have stood up, substantiate our belief in their durability and corrosion resistance.

Does our technique work? We have a very interesting basis of comparison as to the merits of our finishing method as opposed to the standard of lacquer over chromate. Due to the size of our flying boats our stripping operations are done sectionally at each turn-around. On charts of these stripping operations, our new finish was riding side by side with the old finish.

We were able to observe whether corrosion was increased or reduced, whether the wearing qualities were as good as before, and if touch up was as necessary. In every one of these points the described method was superior. In a period now exceeding six months on one of our Flying Ace planes the amount of paint used for touch up has been little. Were it not that inspection demands certain periodic stripping there is no prediction at this time of the life of the finish.


About the only point against the use of this material is its slowness of drying as against that of lacquer. However, this drying time, averaging 3 hr., is not too slow for our purpose. By planning our work we have experienced no difficulty in fitting in this drying time to the scheduled work of our other departments.

In the past year, two entire flying boats have been completely stripped, and the new finish applied. One of the first bottoms so treated is now eight months in use. The finish is still excellent, having corroded less than previously.

This is not meant to be a recommendation for this type of finish. We attribute



PUNCH!

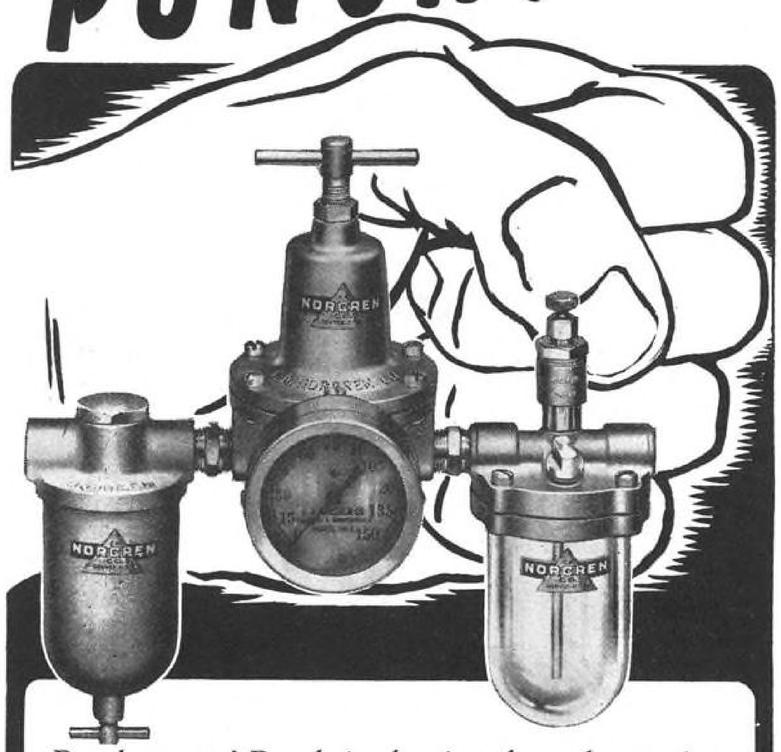

Punch counts! Punch in the ring, from the starting bell to the final count of 10 means the title. Punch in your air driven tools means more production, not 1 but 3 shifts a day.

Be sure *your* air driven tools keep new tool punch permanently. Install a Norgren Lubro-Control Unit in the air lines. It consists of—*filter, regulator, plus gauge,* and the *lubricator.* The Unit knocks out rust and corrosion and puts punch into your production. It shoots clean, controlled, oil-saturated air to all parts of your air tool mechanism.

Automatic; starts and stops with the tool. Prevents corrosion when tools are idle. Installed in a short time—lasts a life time—saves the operator plenty, too. Sizes and types for every purpose.

For complete data write to C. A. Norgren Co.,
220 Santa Fe Drive, Denver 9, Colorado.

Norgren

proper surface preparation as one of the reasons for its success. This surface preparation is such an important factor, that without proper phosphotizing, the life of any finish would be appreciably shortened.

The three important links in the chain of getting a good surface can be summed up as follows: (1) Thorough and proper cleaning inside as well as out, (2) conscientious surface preparation, and (3) the selection of a good finish.

In common with all industries today, we have experienced the usual trouble in getting good, trained painters. To overcome this, the education department of American Export cooperated in setting up a very practical education program.

Classes are held in the hangar four times a week. A course consists of 60 hr. instruction. It is attended by every painter in our department and on his own time. Guest lecturers and technical factory representatives are invited from time to time. Motion pictures in color and sound have been exhibited.

The instructions are given by the foreman of this department. Our greatest difficulty was in getting "green" painters to realize that merely spraying paint did not make a painter. At first, little interest was shown. To them corrosion was something they have to remove. What caused it and how to prevent it seemed outside their province. The same thing was true of finishing materials and the various inorganic processes.

But once their interest was captured they became interested to a point even beyond our expectations. At the present time, electrolytic action is more than a couple of fancy words to them. They understand its meaning and its uncontrolled ravages. The time spent on them has not been wasted, and they expect to go on from here to even higher efficiency.

Intrument Vibration

(*Continued from page* 140)

by the elasticity of the pads, which are so supported that they are free to move in all directions. No bonding of rubber to metal is required since the cushions or pads are retained by a simple and effective mechanical system making possible quick and easy replacement after long service periods.

Accompanying are three photographs showing the comparative vibration neutralizing effects of a Robinson and a conventional four-corner mounting. Vibrometers fastened to the side of each instrument case show the magnitude of the vertical motion when the table is vibrated by the electric motor on the right. Vibration cycles per second and per minute are shown in tachometer between motor and table. It will be noticed (Fig. 2) that the lowest speed, 15 cycles per second (approximating engine idling rpm.) shows very slight vibration of the Robinson amount, which has a harmonic frequency below normal idling speeds. And at the speed shown, it has almost reached the point where motion will not

THAT OUR COUNTRY MIGHT *Out-Design* THE ENEMY



Here, behind RESTRICTED AREA signs, Curtiss-Wright is constantly developing new designs and modifying current models. This is the major precept of the builders of military aircraft . . . . perpetual, unrelenting progress!

While this endless research and experimentation centers on increasing the military performance of Curtiss planes, it has a constructive side too. Many of these war-born advancements will have a peacetime application, when an airminded world takes to the skies!

Look To The Sky, America!

Curtiss-Wright Corporation, Airplane Division, Buffalo, N. Y.

Another Contribution of
Curtiss-Wright
Toward Winning This War

Member Aircraft War Production Council, East Coast, Inc.



U. S. Navy's Grumman Hellcats Poised for Action

Grumman

AIRCRAFT ENGINEERING CORPORATION, Bethpage, L. I., N.Y.

be measurable. The standard mount, however, indicates a very perceptible quantity of both lateral and vertical vibration.

The second picture, (Fig. 3), taken at 20 cycles per second, demonstrates the almost perfect vibration absorption at this speed, as compared to the corner-supported mount on the right, which has a measured vibration of .300 in.

The third picture, (Fig. 4), at 30 cycles per second, is interesting in that it shows slight vibration of the intermediate frame on the Robinson mount, but none in the instrument itself, the slight motion of the secondary frame being entirely cared for by the cushions between the two frames. The standard mounting, however, shows a heavy and violent vibration. This particular speed, 30 cycles per second or 1,800 rpm., is a very important one since it approximates the cruising speed of many airplane engines and a mounting which is not fully effective at this speed transmits destructive vibration hour after hour to the delicate equipment being supported.

Although the units shown being tested are mock-ups of radio equipment, the same comparative results are obtained when identical instrument panel assemblies are tested.

Originally developed as an aerial camera mount, this principle is now used on many bombers to neutralize instrument board vibration (Fig. 5, 6, and 7). In this case the panel is supported by the same double suspension method as previously described, the only difference being that the weight hangs below, instead of resting on, the suspension mount. The stabilizers at the sides are solely for the purpose of preventing side-sway and, except when tilted in flight, have no weight-carrying function.

They'll Fix It—Fast

(*Continued from page* 112)

work by as resourceful a group of Fourth Echelon personnel as one could find anywhere. In one period of ten months that group rebuilt 25 nose sections on heavy bombers, at an average "per plane" time of eight days, using tooling they developed themselves.

Because it illustrates the problems involved and may point the way to an improvement in Fourth Echelon routines, here is the story of that first heavy, which required repair time of over two months.

The nose gear gave way in a particularly rough landing, completely washing out the nose belly section aft to the bomb bay. Crewmen were dispatched to the scene, and using structural steel angle iron, 2 x 4's, canvas, wire, and available sheet stock, they patched it sufficiently for the flight back to base.

To repair the airframe, the crew first stripped out all of the damaged section back to good, sound structure. Needed piece parts were compiled and an effort made to obtain them. Since none was available, the process of manufacturing them was started.

On the first two or three planes the repair section rebuilt them without assembly jigs. This was accomplished by using damaged parts as patterns to make form blocks. Here, the need for ordinates information was discovered. Parts were assembled in the ship, using plumb bobs, levels, transits, and the like, to align them. This required highly skilled mechanics and was a very slow method of assembly.

While this method of repair was being used, there piled up a considerable demand for better and more accurate form blocks and assembly jigs so the job could be handled more nearly as done in the factory. When an attempt was made to satisfy this demand troubles piled up, due to lack of vital information.

Basic dimension information and loft data are the prime requisites of the tool design departments in the aircraft industry. This is true because basic dimensions and contour information do not appear on production drawings. In the instance related there was available a fuselage station ordinates drawing, but it was for an older model whose forward-end dimensions were 3 ft. shorter.

However, working from this inadequate drawing, the tool design group re-lofted the nose section and established the contour in the forward section of the plane to be repaired. Once this information was established, the work of making templates and form blocks went ahead smoothly and rapidly.

Tooling points were located in piece part tooling and were later coordinated



RELEASE!

• In the liberated countries of Europe, shaking off the invader's yoke also marks the opening of huge markets for many of the things we make here.

Already, in this country, the vast aviation industry is making plans to produce for peace-time needs.



Fastening devices of all sorts—Rivets, Rivet-setting Machinery, Phillips recessed-head Screws — are fortunately in a position where customers may take advantage of our enlarged production capacity.

Knowing your fastening requirements NOW will help us to serve you most effectively.

The MILFORD RIVET & MACHINE CO.

EASTERN DIVISION — CENTRAL DIVISION

MILFORD, CONN. ★ ELYRIA, OHIO.

into the assembly jig. This jig was not of standard design, since maintenance authorities requested that the jig and required piece parts be so designed they could be flown to areas where other aircraft might have the same trouble, and thereby eliminate the need for temporary patching in the field.

Normally, the design of such a jig would not present too much of a problem, but at this distant station, under present practice, there was a dearth of information, and materials of the right kind were none too plentiful.

Locating the bulkhead rings on station and establishing contour was not too critical, but location of the lower nose gear castings presented a problem, since here the question of interchangeability was involved. For this reason, these points must be held to very close tolerance. At the home factory this would be accomplished by the use of jigs and checking gages.


How it was solved at the East African base makes interesting reading, but the method is not recommended. That part of the nose gear structure which attaches to the lower gear castings was welded to plates and bolted and doweled to the assembly jig; this method will do if this part is satisfactory, but in the event it isn't trouble will be experienced in installing nose gear on all assemblies made with this jig. What should have been used was some gage or check fixture. With a proper set-up this would have been obtainable from the home plant on short notice.

Another difficulty experienced in the jig design was the establishment of a base for referencing to the undamaged structure of the plane. Had there been anyone present who was familiar with the method of tooling this bomber, he could undoubtedly have identified several jig-located points that could be used. Since no such field man was on hand and no tooling data available, solution of the problem took a considerable time and far too much guess-work.

By a process of elimination it was finally deduced which points, by the nature of their functional duties, had to be jig-located. The jig was their built back to those points. Two upper nose gear castings were used as one point, and some pins in the upper nose section, at the point where the Plexiglas nose is attached, became another key point. With these two reference points it was not too difficult to establish reference planes in the jig. From there on, standard jig practice was followed.

When the jig and coordinated piece part tooling were finished, the job of repairing the ship became simplified because tools and materials were available. As stated previously, it took over two months to repair this one airplane before the tools and jigs were built because all cutting and fitting had to be done by hand. Parts were measured, plumbed, and leveled in place. But once the tools and jigs were available the work became almost factory routine.

Because this damage, due to operational conditions then prevalent in the area, became common, the turn-around time of such aircraft in the depot was cut

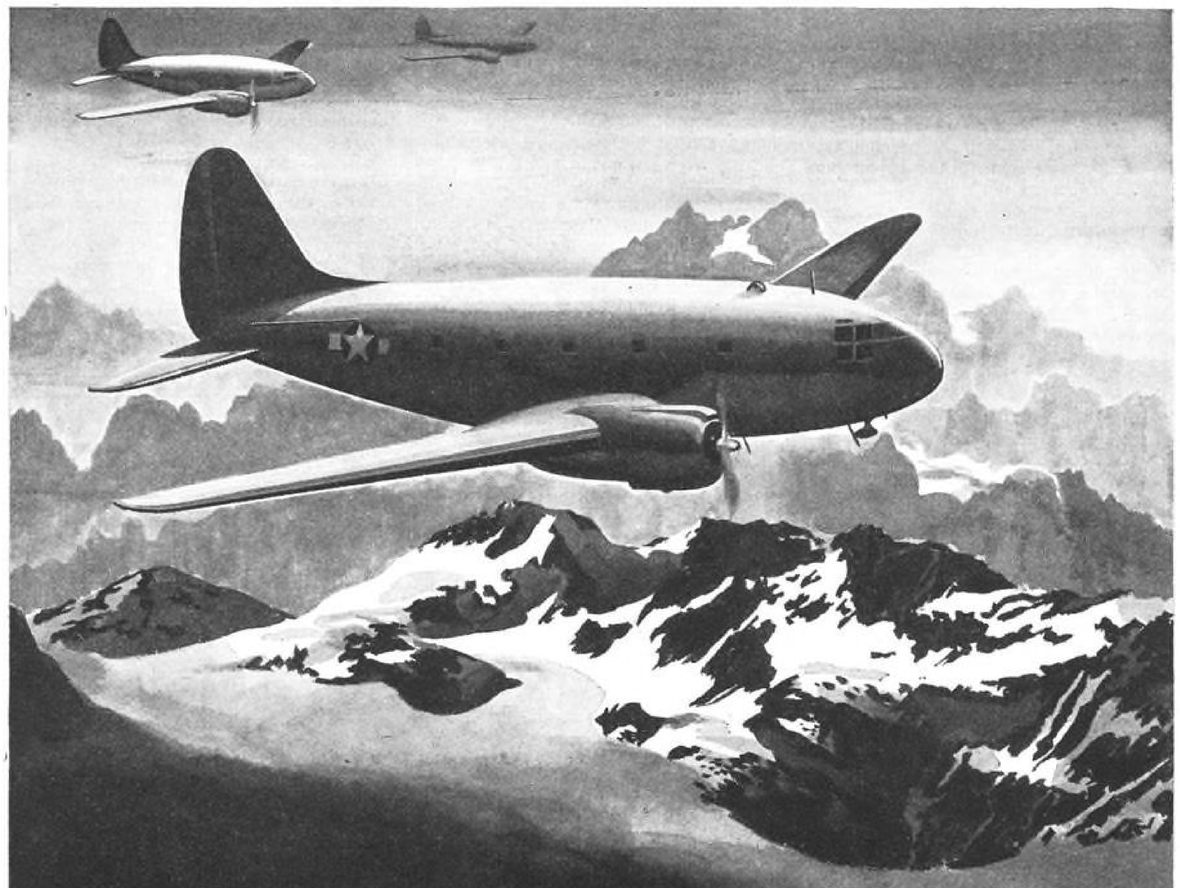

OVER THE HUMP

High over the "hump," the Air Transport Command delivers another one. Rangoon, Moscow, Burma or Bermuda—names on a map are just stopping-off points for the shuttle shift. Flying the "roof route" or skimming the white-tops, the Air Transport Command is doing noble work, unsung in headline or on loudspeaker. Thousands of planes every month are being delivered safely from factory to fighting line, ready for action.

Air Transport Command pilots, like combat pilots, have confidence in the Delco motors that actuate their fuel pumps, air pumps, windshield wipers, defroster fans and machine gun mounts. They know that Delco motors were designed and built to stand the gaff.

When it comes to "fractional h.p.," Delco Products' years of engineering and manufacturing experience are the choice of leading aircraft producers everywhere. They know they can depend on Delco.

The War Isn't Won Yet

BUY MORE BONDS

DELCO MOTORS

DELCO PRODUCTS DIVISION OF GENERAL MOTORS



QUALITY CONTROL...

Assures Easier Machining and Better Performance of Acme Aluminum Castings

The aluminum alloy castings that come to you from the Acme foundry are tested castings—put through every form of inspection and examination known to modern metallurgical technique.

X-ray inspection gives a clear and accurate picture of the casting's internal structure. To measure strength, bars from every melt are pulled to the breaking point on a tensile machine. And the completion of our spectographic laboratory has put at our disposal—and yours—the newest advancements in the scientific analysis of alloy metals.

Because of their accuracy and inherent quality, assured by our quality control, you will find Acme Castings require less machining time, reduce your cost per finished part. Your customers will get better performance from parts made from Acme Aluminum Alloy Castings.

The special advantages of Acme Castings should help you speed production and reduce costs. Acme engineers will be glad to submit recommendations, without obligation.

ACME Aluminum Alloys, Inc.


Formerly Acme Pattern & Tool Co., Inc.

DAYTON 3, OHIO

HEAT-TREATED ALUMINUM ALLOY CASTINGS

ACME PATTERN & TOOL DIVISION

PATTERNS · TOOLS · TOOL DESIGNING · PRODUCTION PROCESSING

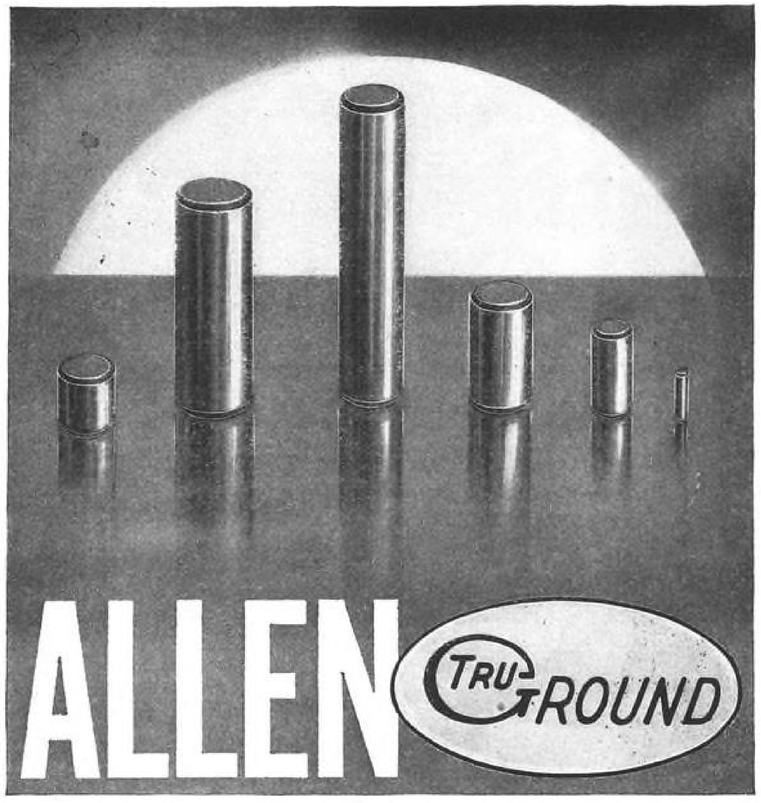

Dowel Pins

Polished precision-ground pins for accurate locating of work: tolerance limit .0002" over basic size (with allowable tolerance of .0001".) Metallurgically in the class of ALLEN Hollow Screws; — made of the same special-analysis ALLENOY steel and heat-treated with the same scientific controls.

Tensile strength measures from 240,000 to 250,000 lbs. per sq. inch. Pins won't mushroom when driven into a tight hole, — the outer surface being *extremely* hard, with a core of the *right* hardness to prevent distortion. Here's HOLDING-POWER for tool and die assemblies under severest stresses.

Ask your local Industrial Distributor for samples and dimensional data, — the same Allen Distributor who serves your interests with the most dependable supply-items in all lines. He carries also a complete line of Allen Hex Socket Screws shown at right.



THE ALLEN MANUFACTURING COMPANY
HARTFORD, ★ ALLEN ★ CONNECTICUT, U.S.A.

to an average of eight days. The tooling worked out so well, ASC immediately ordered seven more jigs built, together with some 150 complete kits of piece parts, for this one plane model.

It should be borne in mind that these spare piece parts and jigs were ordered manufactured, not in the parent plant but in a Fourth Echelon depot located nearly half way around the world from the plant of origin of those planes. It is not known to the author whether repair to the extent described was contemplated when provisioning of spare parts was ordered for this particular plane model, but by doing the job at the site, despite existing difficulties, 25 sorely needed bombers were returned to a condition of tactical serviceability, instead of becoming "hanger queens".

This job was not an isolated instance. It was followed almost immediately by the manufacture by "cut and try" method, of an assembly jig and piece part tooling for outer wing panels of a single engine fighter then in use in that theater. This latter project ran into the same difficulty —lack of accurate tooling data. But the problem was solved, and another spare parts and overhaul bottleneck was broken —the hard way.

It might be well to point out here one of the chief disadvantages of the present spare parts system. As everyone knows, fabricating, assemblying, crating, transporting, unloading, storing, uncrating— and finally, all too often, doing considerable rework to make parts fit—calls for tremendous investments in manpower and time, to say nothing of other costs. And with the ever-changing demands of war, by the time spares are in stock, modifications in the plane frequently make parts partially obsolete.

Then, too, past experience indicates that it is most difficult to foresee what quantities of which parts or assemblies will be needed where and when, until damage or wear indicates them. Then, if two to five months are required for obtainance from the States, a considerable number of planes may be grounded before sufficient supply is received. Furthermore, the shipping of large numbers of large assemblies, or even nested parts, takes considerable time, shipping space, and other forms of military investment, while raw stock for manufacture is, in many instances, obtainable locally.

All difficulties can be largely overcome by institution of a system that quickly supplies Fourth Echelon depots with (1) accurate data, (2) special templates and other small tooling, when required, and (3) services of a factory field-service man who is a specialist with production tooling, its design and construction, and production and assembly methods, as well as maintenance and repair. The latter two types of expert service has been rendered by factory field-service representatives ever since American equipment took to the field. The other services likewise could be made available and in the same manner.

However: (1) The need for gages or master tooling items will be determined by conditions at the base doing the work, (2) this will be only a small fraction of

"Aircraft Quality" GEARS

For the products you are now manufacturing or planning to manufacture, you should know about the many advantages of Foote Bros. "aircraft quality" gears.

These gears were developed to transmit the loads of giant aircraft engines, and the essential demands of high speed, compactness and light weight required a precision in manufacture that amounted to almost theoretical perfection.

Today at Foote Bros. four large plants, these gears are being produced in amazing quantities. The facilities of these plants, plus the "know how" acquired by Foote Bros. engineers and production men, offer manufacturers a new approach to "better power transmission through better gears" for their postwar products.

A new engineering production bulletin on these "aircraft quality" gears will aid your engineers in determining how they can best be applied to your product. Write for your copy today.


FOOTE BROS. GEAR AND MACHINE CORPORATION, DEPARTMENT G
5225 So. Western Blvd., Chicago 9, Ill.

OFFER YOU THESE 5 ADVANTAGES

★ GREATER MECHANICAL EFFICIENCY
★ GREATER COMPACTNESS
★ HIGHER SPEED
★ REDUCTION IN WEIGHT
★ GREATER QUIETNESS

FOOTE BROS.
Better Power Transmission Through Better Gears

For actuators or other devices on commercial and military planes, "aircraft quality" gears are ideally suited.

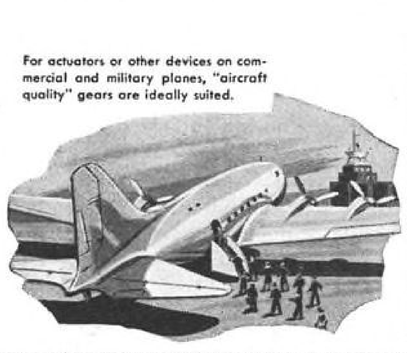


For airplane engines of every size, "aircraft quality" gears offer light weight, compact size, high speed.



For internal combustion engines, "aircraft quality" gears transmit high speeds with a reduction of size and weight.



Printing presses can use "aircraft quality" gears in transmitting the mighty power required for their operation.

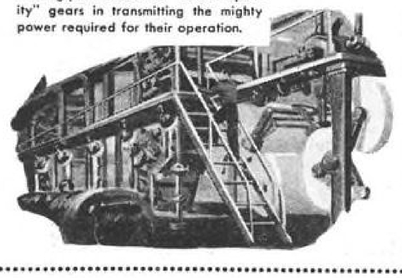


For the manufacturers of Diesel engines, "aircraft quality" gears can help solve many tough power transmission problems.




The demands of machine tool manufacturers for higher speed, lighter weight and compact design recommend "aircraft quality" gears.



Because of their ability to stand up under tough service, "aircraft quality" gears can aid in making tractors better

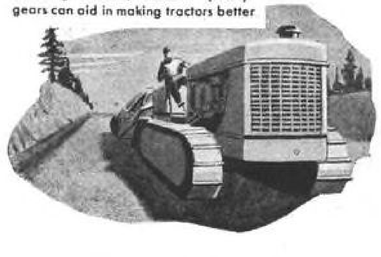

On construction machinery, "aircraft quality" gears will aid in solving many engineering problems.

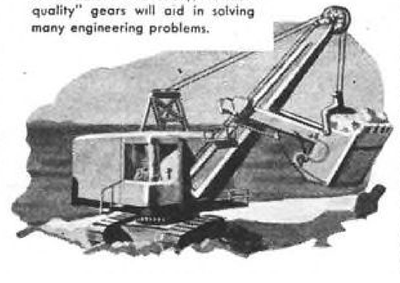

FOOTE BROS. GEAR AND MACHINE CORPORATION
5225 S. Western Blvd., Chicago 9, Ill. Dept. G
Please send me a copy of the Engineering Bulletin on "Aircraft Quality" Gears as soon as it is available.

Name.....
Position.....
Company.....
Address.....
City.....*State*.....

Precision Parts for the *AVENGERS of PEARL HARBOR*



THE new Boeing B-29 Super Fortresses, now raiding Japan with increasing frequency, carrry larger bomb loads farther and faster than any other planes ever built. Their Fuel Control Systems, which contribute so much to the amazing fuel economy of the B-29's four 1800 H. P. engines, are built to standards of precision that only a few years ago were considered impossible.

Arnolt is proud to be entrusted with the production of some of the precision parts required for the Fuel Controls. This important assignment is one of several sub-contracts awarded to Arnolt where precision tooling is a vital requirement.

If you need assistance on your production problems, write for a copy of "Available Facilities for the War Program" which gives details on Arnolt's facilities and diversified manufacturing experience.

BUY MORE WAR BONDS—NOW!

Peacetime Builders of
SEA-MITE
MARINE ENGINES

ARNOLT MOTOR COMPANY, *Warsaw, Indiana*
Associated with ATLAS STEEL AND TUBE COMPANY
UNION TOOL COMPANY . . . . . MANCHESTER-ATLAS COMPANY
SOUTH BEND MACHINE WORKS . . . . . PERU ENGINEERING PRODUCTS

the total master tooling or gages used in manufacturing the complete airplane, (3) no tooling will be attempted unless the frequency of specific damage warrants it, and (4) the decision as to what is needed will be the responsibility of the specialist in the area.

There will always be the need for the so-called normal stock of spares—for the normal volume of replacement demand. But practically every theater, and almost every base in such theater, develops what came to be known as common type accidents or battle damage. It is this common or frequently recurring demand for parts or assemblies which could be met in the Fourth Echelon depots, if they had on tap the forementioned data, tools and advice.

Accurate data, including that covering tooling and loft lines, is available at the plant of origin. It should be comparatively easy to set up means to quickly furnishing it on request.

In those rare instances where a special piece of master tooling has to be used, it too, should be available. Templates, gages, and other control devices for establishing and checking critical points, would not, for the most part, be large, expensive to duplicate quickly, or difficult to ship by air.

Informed personnel might, possibly, be the hardest to obtain, but one such man at each depot would suffice. Airframe tooling and production methods have become fairly uniform throughout the industry, and it would be unnecessary to station at the depot a representative of each company whose planes were serviced there. Instead, one man would advise and direct such work on all types of planes.

If the system proposed here were established, and the subassembly method of repair were in operation, in the case of the nose section replacement previously cited the following would probably occur:


When structural needs were ascertained, the plant of origin would be asked, via cablegram, for microfilm copies of the data required and such check gages or special tools needed at the depot to assure interchangeability of critical parts. Upon arrival, some days later—surely within a week—the new section would be built and installed.

The damaged structure could then be reworked, if not totally destroyed, and placed in stock, effecting in many instances a substantial saving in materials and critical turn-around time for other planes requiring the same replacement. Reworking could be backlog work, done when depot personnel were not otherwise engaged.

It should be noted that it is not proposed that the information and tooling data be made available for equipment. It would be impractical and unnecessary to extend this service beyond airframes, for obvious reasons, but it would be a distinct advantage to have it available for airframes, particularly where great distances were involved. In the Pacific areas, it would help eliminate two of the greatest handicaps to successful prosecution of the air war—time and shipping space.


The airframe companies, a limited in-

Strong Lightweight Tubular Steel
WORK STANDS
for Increased
Safety AND **Portability**

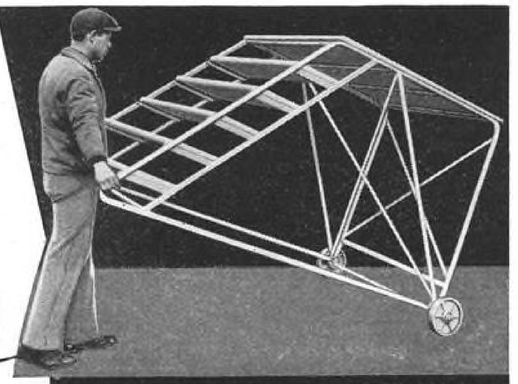

The "Wheelbarrow-type" is one of the many Gold Medal Work Stands specially designed and made to specified heights for the Aircraft Industry. Fabricated from steel tubing, it is constructed to put men up next to their work in firm relaxed positions. Carefully placed bracing and supporting members give maximum strength for greatest safety and minimum weight for extreme portability.

Write for Bulletin illustrating many types.

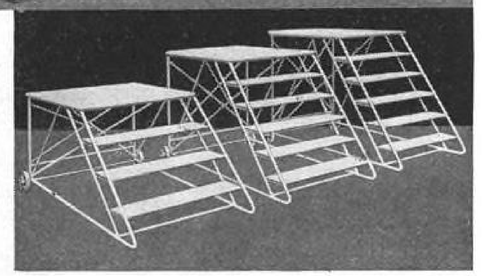

Gold Medal
Safe Ladders and Scaffolding for Every Purpose
THE PATENT SCAFFOLDING CO., INC.
1550 Dayton Street, Chicago, Illinois
Long Island City, N. Y.—3821—12th St., Los Angeles, Cal. St. Louis, Mo. Phila., Pa. Atlanta, Ga. Boston, Mass.
San Francisco, Calif. Pittsburgh, Pa. Milwaukee, Wis. Miami, Fla.

FEMALE SPIES
that work for you!




Yes, we employ "female spies" to work for your benefit. They make more than 18 rigid inspections of Miniature Precision Bearings during manufacturing operations — inspections that insure enduring, precision performance of your small instruments. Write for new Catalog, A-11-44 and send your problems to our engineers for recommendations. No obligations, of course.

Radial and Pivot type bearings; outside diameters 5/16" down to 1/8" — world's smallest ball bearings.





MINIATURE *Precision* BEARINGS
KEENE, NEW HAMPSHIRE, U·S·A·

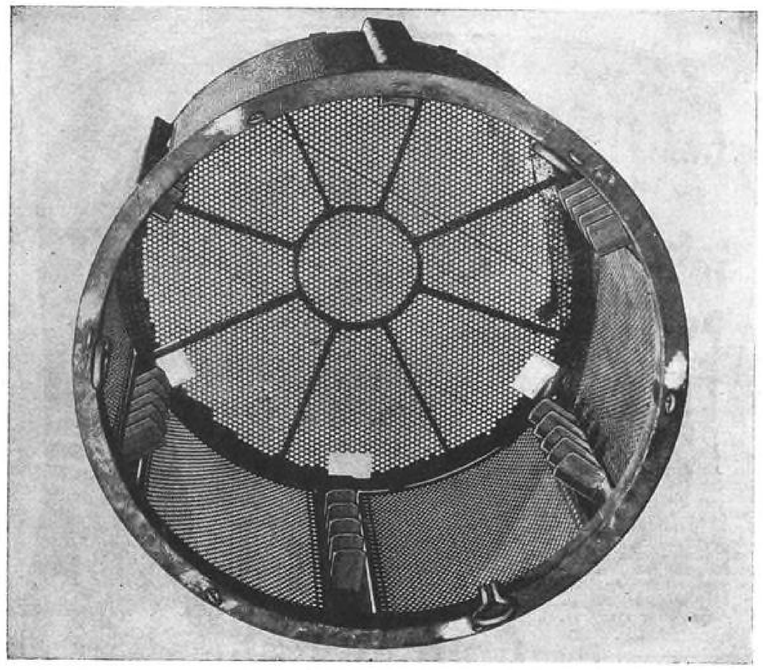

Name Your Size, Shape and Style

Never before has an industry faced the rapid changes in specifications and materials which the aviation plants of the United States have experienced since they started building aerial equipment for war.

Whatever your needs may be, you will find that all P. S. (for Pressed Steel) Carburizing and Heat Treating equipment is ahead of the times in such products as:

- Alloy Exhaust Manifolds
- Alloy Retorts
- Alloy Tubes
- Annealing Baskets
- Base Sheaths
- Annealing Covers
- Bubble Caps
- Carburizing Boxes
- Thermocouple Protection Tubes
- Cylinder Neck Rings
- Inner Covers
- Dipping Baskets
- Pickling Baskets
- Radient Tubes
- Steel Cylinder Caps
- Tube Assemblies
- Tumbling Barrels
- Welded Alloy Tubing

All of them weigh less than the ordinary—thus are more efficient, more economical, more easily installed.

The Pressed Steel Company

OF WILKES-BARRE, PENNSYLVANIA

BRANCH OFFICES

Broad St. Station Bldg., Philadelphia

312 Curtis Bldg., Detroit; 606 Nicholas Bldg., Toledo

1915 Engineers Bldg., Chicago; 51 E. 42nd St., New York

1005 Sterling Bldg., Houston, Texas; A & M Accessories Ltd., 19 Melinda St., Toronto

vestigation discloses, would welcome the plan, since it would considerably reduce one of their current production-retarding problems—that of spares.

Beam-Approach School

(*Continued from page* 188)

as theory of flight and avigation. They take the controls of a visual Link (a trainer with an open cockpit) and fly by sight, learning the feel of the controls. They are assessed after two weeks, and if their standing is high enough, they do elementary flying in the low-wing Fairchild *Cornells* (now standard RCAF trainers) up to the solo stage. This Link-to-Cornell training teaches them the value of the "synthetic" flight—proves to them that if they handle the controls properly in the Links, they will handle the actual aircraft properly.

They next go to the Instrument Link Squadron, where they are taught synthetic instrument flying, radio procedure, and synthetic operational exercises. For example, they are taught to direct a "fighter pilot" in a Link trainer to hunt down an "enemy bomber", the sort of exercise which lends interest and value to Link trainer work. It is a real test of flying lore. They must watch to see that the "bomber pilot" doesn't cheat by going faster than a real bomber could travel or that the pursuing "fighter" doesn't travel at top speed all through the chase.

In the final stages of the Link course, trainees go into the air again. They do 10 hr. blind flying on instruments, once more learning by experience the practical value of their synthetic training on the Link. To further aid in realism, the RCAF recently installed the first twin-engine Link trainers.

Throughout the course, pupils receive constant tests and are under constant observation as to suitability. It is by far the longest and most complete course ever given Link instructors in North America, the RCAF claims. To study its values the United States AAF, has sent students to Deseronto.

Mexico's Opportunities

(*Continued from page* 184)

Mexico on the Atlantic and the narrow gage Isthmus line to Guatemala), not only was there no airport, but within the memory of man no airplane had ever landed within miles of the place.

However, rumor had it that the Rio Coatzacoalcos regularly forms a sand bar island in its middle each rainy season (just below the high trestled bridge). This was said to be fairly smooth and unobstructed for possible landings during the four months of dry season. Arrival revealed the island dry and narrow, and after a steep side-slip landing, generous measurement showed a landing area all of 500-ft. long by 110 ft. in width. The town's entire population, headed by the President Municipal dressed in full uniform, arrived shortly by fording the river on horseback or else swimming downstream with the swift running current. The



This big black battlecruiser is the first true night fighter

NORTHROP BLACK WIDOW

P-61 NIGHT FIGHTER

You're looking at the largest fighter plane ever built. It packs not just a pilot but *three* fighting specialists.

It is specially equipped to hunt down enemy planes in the dark. And it's "loaded for bear" with a battery of cannon and machine guns which can destroy anything that flies.


The big Black Widow has pursuit ship speed and climb. Yet it is a sweetheart to handle. It can fly securely on only one of its over-2000 h.p. motors. It is specially designed against stalling in the tightest turns —still more insurance for our fliers. And for extra safety on small, dark fields, the Black Widow is built to take off quickly, land very slowly.

That's a lot of performance for a plane as big as a heavy standard transport. But outstanding aircraft design and production is Northrop's trade. As the Northrop group produces the revolutionary P-61 today, Northrop is pioneering still more advanced airplanes for tomorrow.

NORTHROP *Designers and Builders of the* **BLACK WIDOW P-61 Night Fighter**

NORTHROP AIRCRAFT, INC. • NORTHROP FIELD, HAWTHORNE, CALIFORNIA

MEMBER AIRCRAFT WAR PRODUCTION COUNCIL, INC.

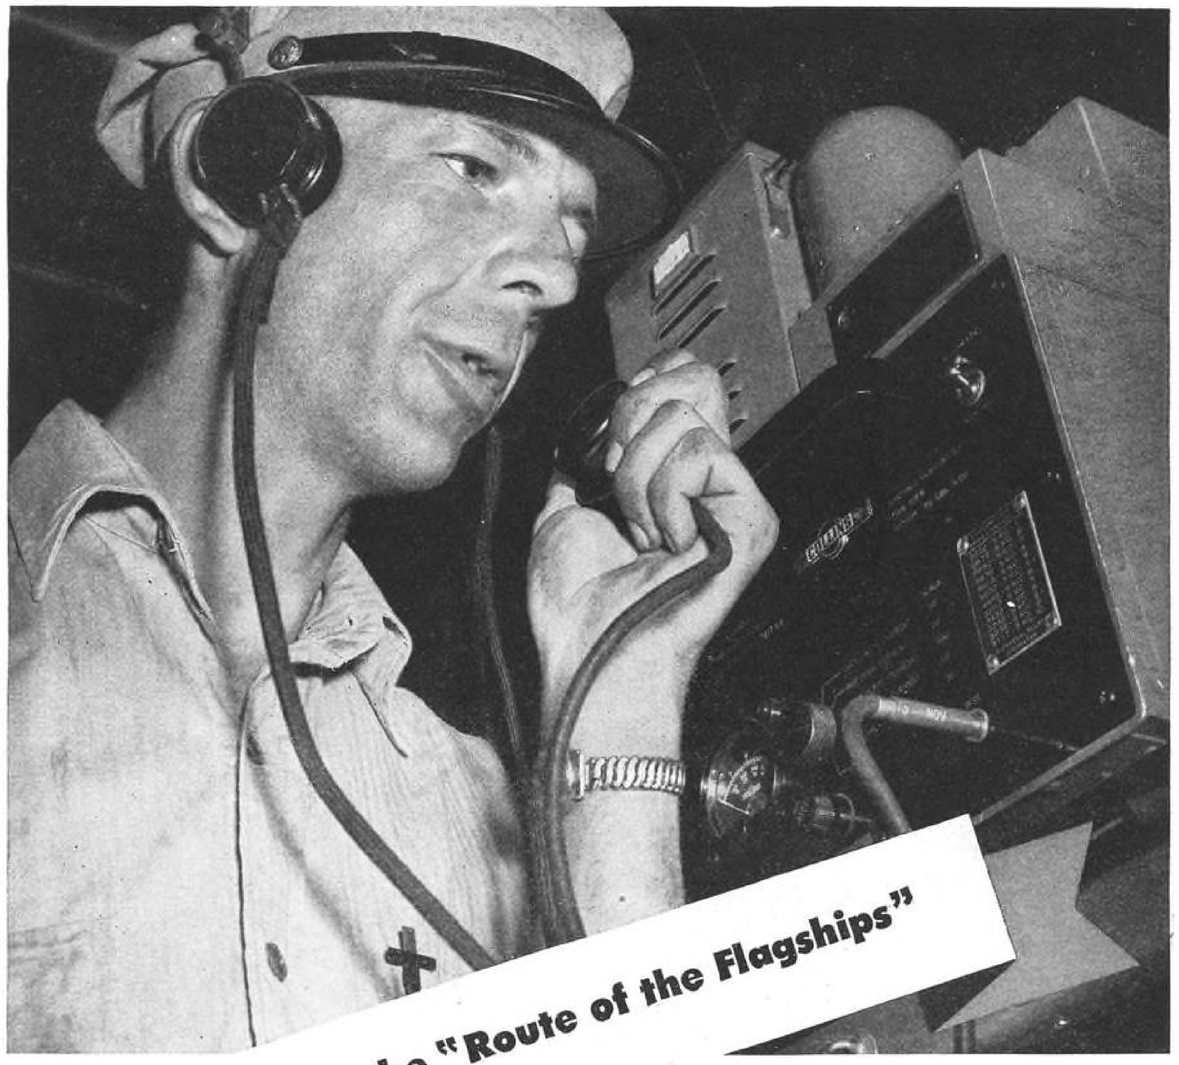

Standard on the "Route of the Flagships"

ARMY E NAVY

In 1939, American Airlines adopted the Collins 17F Autotune* aircraft transmitter as standard equipment for its entire fleet.

Previous experience on a lesser scale had indicated the wisdom of this step. Succeeding experience has confirmed it.

Compared with previous equipment, the 17F's doubled the power output (to 100 watts) with slight increase in weight, and the Autotune* provided thirteen quickly available operating frequencies instead of three.

Daily through the years, these rugged, uniquely efficient airborne 17F's and powerful Collins ground transmitters have given trustworthy support to a superb Operating Department in maintaining the great American Airlines tradition of safety and dependability.

After the war, Collins will again specialize in the development and production of advanced types of communication equipment for commercial aviation.

Its designs will bear the fruit of intense research and outstanding engineering achievement now engaged in meeting the hard demands of military service all over the world. Collins Radio Company, Cedar Rapids, Ia.

*The Collins Autotune is a repositioning mechanism which quick-shifts all transmitter or receiver controls simultaneously and with extreme precision to any one of a number of pre-determined frequencies. U. S. Patents issued and pending.

COLLINS

pleasure of each day's takeoff was greatly lessened by the hazards of gaining access to the aforesaid landing strip.

For the greater part, at any rate, the Republic of Mexico is the pilot's paradise. Or it would be if equipment, service, and landing field needs were brought to standards somewhat equivalent to those in the United States.

Without going into details or statistics, it may be stated that the Republic of Mexico is being adequately supplied with military planes and equipment through Lend-Lease. Civil aviation needs are something else; here no help has been extended. Obviously, such needed assistance in the form of small, practical ships such as Taylorcraft, Piper Cubs, Stinsons, etc., must come from the U. S. No other source is available.

Civil aviation in Mexico is not primarily a matter of pleasure flying. Rather, because of topographical conditions, lack of roads, and scarcity of available space on established airlines, the business executives or other individuals whose work is directly or even indirectly connected with the war effort, must necessarily suffer because of such lack of adequate air transportation or equipment.


Even though persons hold civil licenses to fly and could, by ownership of private planes, extend the activities of their business and, incidentally secure wider distribution of American products—they are prevented from so doing by the fact that no up-to-date planes are available and because those which are here have been flown from three to eight years and in Mexico are sold at prices way beyond ceilings established in the U. S.

Any small utility planes—which by the grace of God or the foresight of some air-minded individual in authority might perchance in the future find their way to Mexico—must of necessity be in sound condition. Because of lack of repair and reconditioning facilities here, not to speak of lack of parts, planes arriving must be in good shape without need of overhaul. Reserve gas tanks are looked upon not as special equipment but as required insurance policies, for Mexico's mountains are legion and have a lean and hungry look.


The old story of Cortés' meeting with Carlos the Fifth, following the former's conquest of Mexico, is brought up to date when describing contour conditions. Asked what the country was like, after detailed discussions of its richness in gold and silver, Cortés paused for a moment and searched for an apt description. Spying a sheet of parchment paper he took it and crumpled it in his fist. Throwing it in front of the monarch he said, "There, Sire, is Mexico!". And so it is—mountains beyond count and in most cases, with hardly postage-stamp space between them to offer refuge for emergency landings.

Today, in all the Republic, there are 600 pilots holding private licenses. But for this number there are only 150 private planes to fly, no more. This is certainly not an enviable situation; it is indicative of present equipment needs. There are no factories, no parts replacements, and not even the opportunity for the people to buy the cast-off planes of their flying cousins to the North. If

WHO
DESERVES TO GET NAUGAHYDE
FIRST?

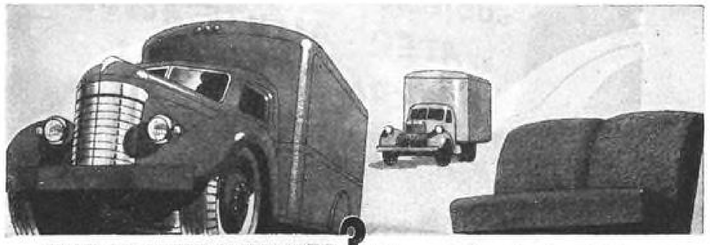

THE TRUCK BUILDER? The new Naugahyde upholstery developed for war service is so wear-resistant it is used in Army trucks and tanks. Battle-tested with toughness to spare, it is perfect for truck seats.

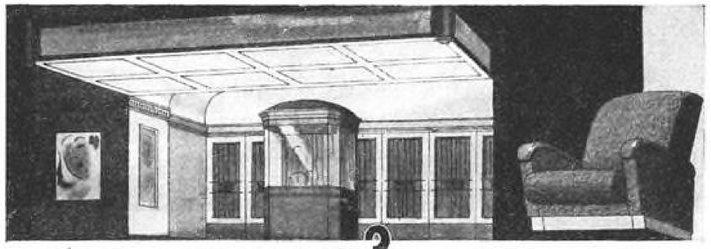

THE THEATER OWNER? The new Naugahyde coated fabrics are so fire-resistant they're used by the Navy—so tough and hard to scuff, they stand almost *any* abuse. They're made-to-order for theater and restaurant seats.



THE PLANE BUILDER? Combine the toughness, long-wear, and flameproof features of Naugahyde with its beauty and choice of colors, and you understand why it is the number one bet for airplane upholstery.

WHO COMES FIRST? *When some of the genuine "U.S." Naugahyde Upholstery (now going into war equipment) is made generally available, perhaps* YOUR *needs should come first. It may happen sooner than you think, so bring your problem to us* now. *Whatever your needs there will be a Naugahyde upholstery for you that resists wear, looks smart, costs little.*

"U.S." NAUGAHYDE
UPHOLSTERY

REG. U. S. PAT. OFF.

Serving Through Science

UNITED STATES RUBBER COMPANY

1230 Sixth Avenue • Rockefeller Center • New York 20, N. Y.



Use 3-M ADHESIVES

Shown here is one of many gasket adhering operations performed in the assembly of aircraft parts. 3-M Adhesives are designed to resist heat, water, aromatics and other deteriorating agents. Easily applied with brush, scraper or pressure gun, 3-M Adhesives are firm after setting but maintain their flexible, adhesive qualities indefinitely.

Hundreds of problems have been solved in our adhesive laboratories for Adhering, Sealing, Coating, Insulating, Impregnating and Sound-deadening. This experience coupled with our extensive facilities and personnel have developed formulas that are dependable.

One of our present formulae may fit your particular needs, but if not, we'll build one to do the job. Mail the coupon below for information regarding other 3-M Adhesives.

Buy More War Bonds!

MFRS. 3-M PRODUCTS

MINNESOTA MINING AND MANUFACTURING CO.

GENERAL OFFICES: SAINT PAUL 6, MINN.
ADHESIVE AND COATINGS DIVISION
DETROIT 2, MICHIGAN



A1144A

Minnesota Mining & Manufacturing Company
900 Fauquier Avenue, Saint Paul 6, Minnesota

Send me a copy of your new booklet, "3-M ADHESIVE DATA", which gives helpful information on your more generally used adhesives.

Name_____

Address_____

City_____ Zone____ State_____

only a small part of the huge sums spent on other, often questionable, pursuits were diverted into practical aeronautical channels, where sound results could be gaged in advance, then maybe civil aviation, which after all represents the alert and progressive people of any country, might benefit.

Today in the United States accredited landing fields are common, but the contrary is true here in Mexico. Those first-class fields which do exist were born of necessity—originated through the efforts of commercial airlines, large or small, which have adapted the best spots available for the usual simple landings and takeoffs.

Actually the type and size of landing fields, such as there are, may be gaged by the size and importance of the servicing airline. Where Campañia Mexicana de Aviación, subsidiary of Pan American, lands, there is a first-class field with good space and facilities. Where Panini lands (the majority of its planes are Travel Airs), the fields would, in the U. S., be classed as emergency only. The same is true of Lineas Aéreas Mineras, whose planes are for the most part Lockheed Vegas. The Bellancas of Aereonaves de Mexico use simple landing strips in such isolated places as Tecpan, Petatlán, Zihuatenejo, and Audad de la Union, all in the State of Guerrero on Mexico's West Coast.

This is no reflection on these servicing airlines but rather a compliment to them, for otherwise no facilities whatsoever would exist in the distant centers.


Speaking of gas and oil facilities, the smart pilot will, before taking off for isolated spots, secure through friends or contacts permission to draw on established airline supplies stored at the particular points. Otherwise he will be stranded, or forced to use auto-grade gas, provided it is available.

Here is an actual occurrence which took place recently at the field of Acapulco. The writer arrived in a Taylorcraft for a week-end of swimming and relaxation. His first thought upon landing was to ready the plane for the return trip to Mexico City. However, having neglected to secure permission to draw a modest 40 liters (about 10 gal.) of gas from either airline touching Acapulco, he went into town to buy direct from Pemex, the government-owned utility. The Pemex people were most kind and solicitous, but they regretted that they could only sell aviation gas in drums of 100 liters or more, unless the purchaser brought his own container.

Besides, the offices closed at 1 p. m. on Saturdays—and with 20 min. to go, your correspondent hurriedly visited the town's three hardware stores in an attempt to buy two used alcohol cans of 5 gal. capacity each. Failing in this, a visit to the native market finally dug up the required containers, which had to be cleaned. Also suitable plugs (twisted corn husk), had to be found—after which the gasoline purchase was made and the plane readied for its return trip. This is not a typical case but rather an example of remarkable good luck.

All civil and commercial aviation ac-

AMONG THE *First* TO RECEIVE THIS SIGNAL HONOR!

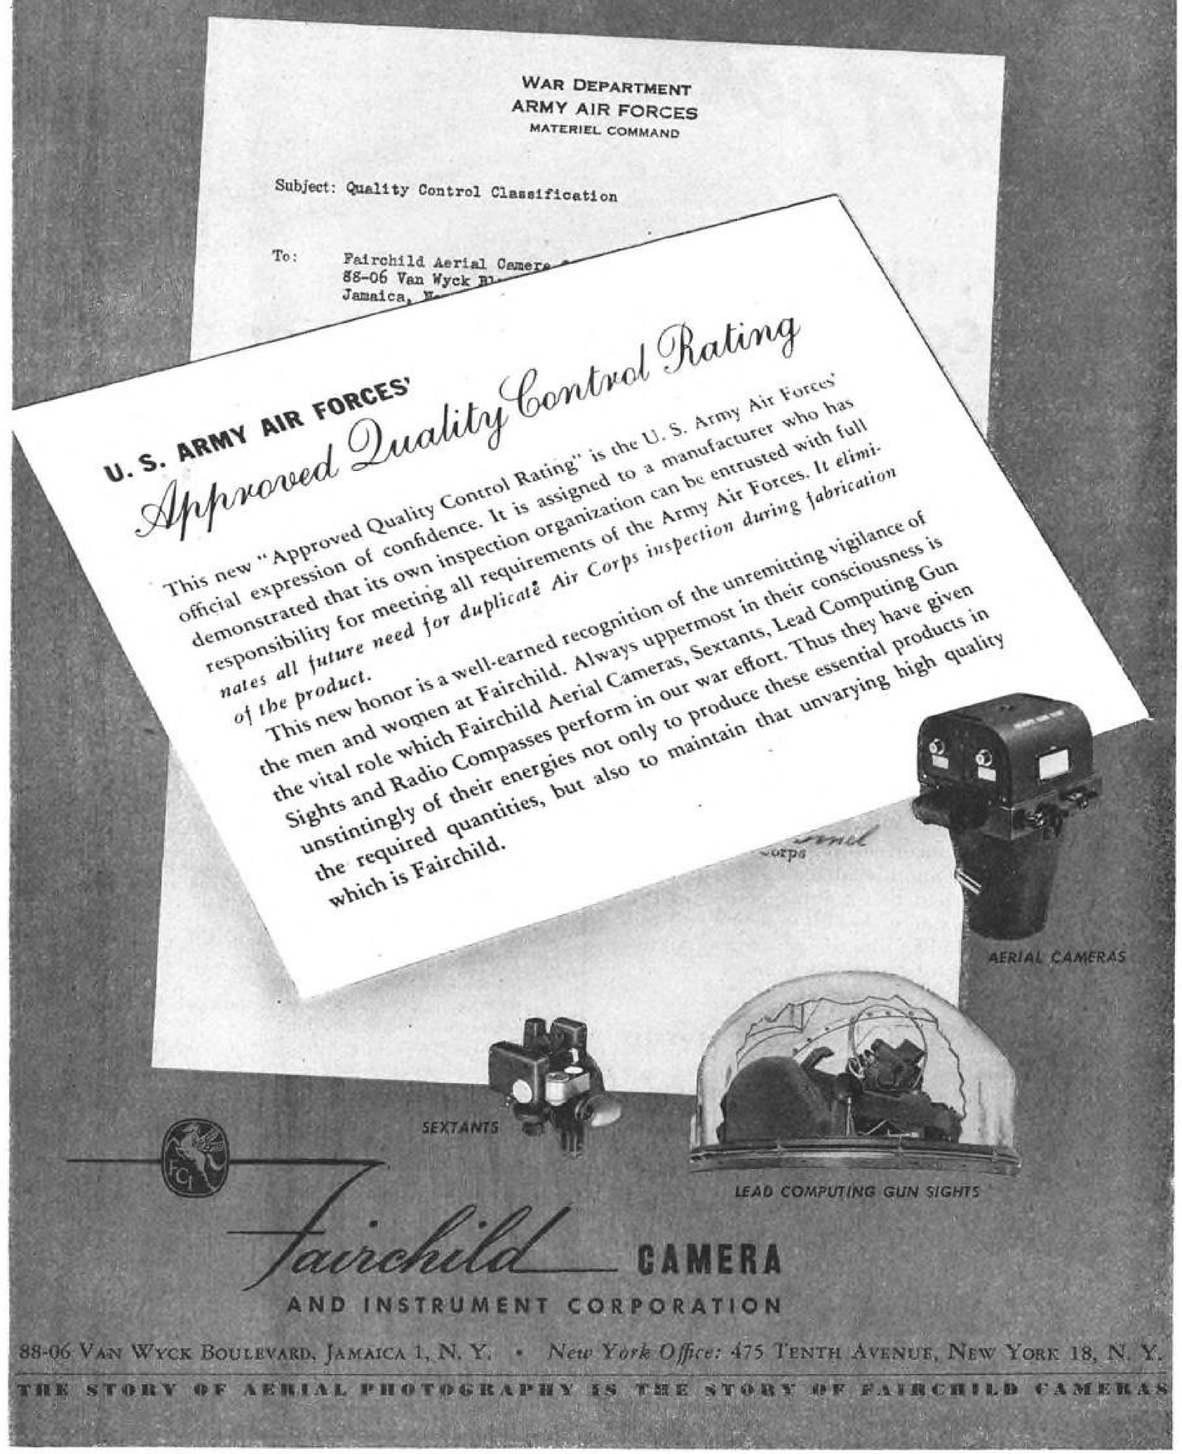

Fairchild CAMERA
AND INSTRUMENT CORPORATION

88-06 VAN WYCK BOULEVARD, JAMAICA 1, N. Y. • *New York Office:* 475 TENTH AVENUE, NEW YORK 18, N. Y.

THE STORY OF AERIAL PHOTOGRAPHY IS THE STORY OF FAIRCHILD CAMERAS



Don't lay that pencil down

. . . till you show where the Short Cut Fastening Method can be used!

Choosing the fastening device for use in the assembly of your post-war product is a very important decision. It should be settled now, while the product is still in the design stage. Too many products are tooled up and ready to go into production before somebody starts to really question fastening methods. This frequently leads to needless expense, troublesome delays, and costly changes.

You will want to use P-K Self-tapping Screws whereever possible, because this *short cut fastening method* can save you from 30% to 50% in asembly time and labor! It is the *simplest* way to make most asemblies. You eliminate tapping for machine screws, and tap expense – fumbling with bolts and nuts – costly inserts in plastics – riveting in hard-to-reach places.


Whether you are working with light or heavy steel, cast iron, aluminum, brass, plastics – you'll find you can use P-K Screws to advantage in 7 out of 10 cases.

A P-K Asembly Engineer will help you plan ahead for savings, and you'll find his advice unbiased. He'll recommend only the best Self-tapping Screw for the job, because Parker-Kalon makes *all* types. Write and tell us when you would like him to call, or send details of your fastening jobs for recomendations.



HELPFUL GUIDE – FREE!

The P-K "User's Guide" is crammed full of information on where and how to use P-K Self-tapping Screws, arranged so you can find the facts you need quickly. Write for it. Parker-Kalon Corp., 208 Varick St., New York 14.

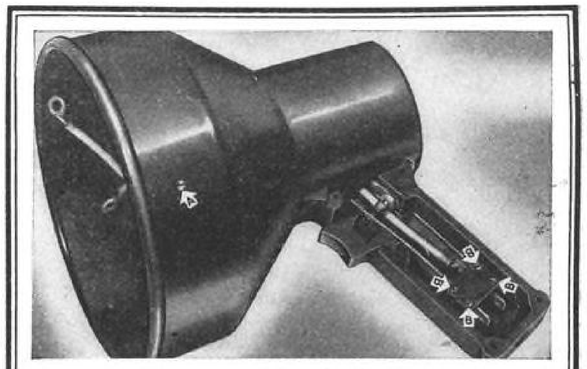

HERE'S HOW E. A. LABORATORIES PLANNED AHEAD FOR ASSEMBLY SAVINGS

By designing their aircraft lighting specialties for assembly with P-K Self-tapping Screws, this company eliminated tapping and tap expense, and the need for metal inserts. As a result, molding and assembly are faster, costs lower, and fastenings hold with dependable security.

On this inter-aircraft control light –

(A) Three P-K Type "F" Screws are used as locating pins for lamp unit.

(B) Four P-K Type "F" Screws hold switch contactor and terminal lug in position.

(C) Five P-K Type "F" Screws fasten Bakelite handle cover to Bakelite handle. (Not shown.)



PARKER-KALON
Quality-Controlled
SELF-TAPPING SCREWS

SELF-TAPPING SCREWS FOR EVERY METAL AND PLASTIC ASSEMBLY



Let Aeronca show YOU how to get ready to do

BIG BUSINESS with a *SMALL AIRPORT!*

Do you want to get into the real money making end of aviation, the coming new industry—in business for yourself? You can be independent —your own boss—running your OWN AIRPORT.

Now—today—*you* can start getting ready to make big profits in aviation! You need no fancy set-up, no big cash outlay. But you *do* need the "know how", and *only* Aeronca offers its dealers a *complete profit-making program!* Tells you things you must know to make money with a small airport; to whom and how to sell Aeronca planes, how to make your field "flying headquarters" and many other things you'll want to know.

Aeronca's *complete* dealer program is based on more than 16 years experience in leadership of the personal plane field. It can start *you,* as it has started others, on the road to success and profits through small airport operation!

Ask Aeronca for the facts—now. Send for illustrated booklet today. Use the coupon.



MAIL THIS COUPON! *GET THIS BOOKLET NOW!*

The Only Light Aircraft Company to Receive the Army and Navy "E".

AERONCA
AIRCRAFT CORPORATION
MIDDLETOWN, OHIO

Al Bennett, Director of Sales,
Aeronca Aircraft Corporation, Middletown, Ohio.

Send me your valuable booklet on "Why You Should Be An Aeronca Dealer". I enclose 10c.

Name.....

Address.....

City and State..... H-11

tivities in Mexico are under the direction and regulation of the official governmental department, *Secretaria de Comunicaciones y Obras Publicas.* Some day, when the importance and possibilities of civil aviation will be recognized on a par with the present recognition given to commercial aviation, all these things will be changed—but until then the hapless private pilots of Mexico must carefully estimate chances of completing each flight on the basis of individual initiative alone.

The military phase of flying in Mexico may be passed over with the remark that the military and aviation experts of the U. S. are helping in the thinking, planning, and supplying of the minimum needs of the presently growing Mexican air force. When one considers that in the revolution in 1916 only one plane was occasionally available to the government forces (without changing the results of the fighting) and that now the local military air force boasts some 100 combat planes, it is obvious that real strides have been made. This force is growing daily. Suffice to say that Mexico's military needs are being met and present personnel can give a good account of the time, training, and money expended.

Two years ago, in the parade and demonstration of the 16th of September, celebrating Mexico's liberation from Spanish rule, the local military air force boasted exactly 21 planes, which carried out a simple formation over the 50,000 troops which paraded the city's streets. Recently, in a special demonstration put on for the president and military leaders, the augumented force comprising scores of planes—bombers, fighters, and troop-carrying transports—executed complicated maneuvers reflecting credit on the efforts and results obtained in the intervening two years.

But most of the progress in Mexico must be credited to commercial flying. Almost all of the few airports which exist, the majority of the trained personnel, and existing servicing facilities, must be credited to commercial endeavor. Smartly the laws governing flying activities demand native born personnel to pilot the planes flying within the country. As a result, not only has the Mexican pilot been pushed forward, but results have shown that selections have been uniformly good. All of CMA pilots, aforementioned subsidiary of Pan American, are native stock, and their performance is on a par with the best U. S. can turn out. So far no accidents whatsoever have been chalked up against CMA. But accidents do occur in Mexico, and they may be blamed primarily upon lack of modern equipment, inadequate landing fields, and the absence of up-to-date service facilities.

CMA will take, for example, a recently graduated pilot who shows promise and aptitude and will continue his development under their own instruction facilities. As a co-pilot he has every opportunity to build on inherent ability, and soon he finds himself a full-fledged captain of a minor run. After this his opportunity depends on his own continued ability and steadiness. These commercially trained pilots, avigators, etc., are not siphoned off into military activities for, while Mexico is allied in all war efforts, thus far no actual demands have been made which require hasty expansion of her air forces. Probably better stated is the fact that the air needs of the Allies have been met among the larger United Nations without necessity of drawing on other friendly allies.

In all fairness it should be remarked that Mexico's president, Manuel Avila Camacho, has publicly offered the resources of the country's armed forces, particularly the air arm, in the event such assistance is requested or required.

As remarked previously, all aviation activities (excluding military) come under the control and regulation of *Secretaria de Comunicaciones y Obras Públicas,* under which authority the *Departmento de Aeronautica Civil* passes upon all matters relating to civil flying. The present head of the Aviation Division is Sr. Gral Alberto Salinas, an able and fair administrator. As closely as possible, Mexico has followed the rules and regulations obtaining in the U. S. in outlining her basic control. As a result the visiting pilot need learn few if any new flying rules.

Today's restrictions governing the teaching of flying wisely limit such opportunity to only native born Mexicans or to nationals whose country is allied or friendly to the war effort. Licenses and equipment formerly held by subject citizens of the Axis powers have been cancelled and expropriated.

For example, a native of the United States residing in Mexico must, before being granted a learner's permit by the Department, secure from the U. S. Embassy a special letter of permission, after which he can apply for his permit. Naturally he is also subjected to a rigorous physical examination, and during the course of his training he is not permitted to change instructors without written permission from the Department. It is of interest to note that a recent regulation requires negative Wasserman and Kahn tests to permit preflight training and revalidation of existing licenses.

Civil pilot training is 100 percent Mexican instructed, and while the number of teachers is limited they are excellent. Most of them, at least those attached to the Mexico City Airport, speak English as well as Spanish, but efficiency in learning is more quickly and better obtained through the medium of Spanish itself. In fact, in order to complete the ground school course and pass the required technical examinations of the department, a solid foundation in Spanish is both required and necessary. Practically no aviation schools, as such exist, if exception be made of one recently formed, and for the most part instruction is by individuals who own one or two planes each.

For a country where the airplane is more logically adapted than any other means of transportation; where time factors save days, not hours only, over all other available means; where there is gasoline in abundance and wealth for expansion and investment in aviation activities; and, above all, naturally adaptable personnel—the situation regarding planes available is nothing less than deplorable. Were the average North American pilot, with a few hours or many, to inspect the planes assembled on the line at the ready for daily practice, he would probably be scornful or somewhat apprehensive.

With an over-all population of some 20,000,000, and with 2,000,000 or 10 percent of these resident in the Federal District, Mexico is an impoverished country so far as flying equipment is concerned. Here, too, is concentrated most of the wealth and certainly most of the progressive element to whom flying is a natural development to be learned, enjoyed, and utilized. But such lack is not the fault of Mexicans. They do the best they can with the means at hand. Again, if the prodigious goodwill funds were directed, in only a small part, to civil flying activities, the results could be pre-gaged, justified, and even paid for in advance by an appreciative waiting list.

We have U.S.-made personal craft at the Mexico City Airport. Some are '40 models, but most date back to '38 or even before. Some, still sturdy but no longer stylish, have put in six to nine years of practically everyday flying. Yet these are typical of the planes which are lined up for daily use and which still produce quotas of new students, required hours, and some, if not much, cross-country practice. It is true that during the war,



An Engine Stand That Meets Every Requirement of Full-Speed, Full-Time Production

● Designed for use with interchangeable mounting plates for radial engines, this stand has an entirely enclosed gear drive and adjustable arm brackets which make it easy to obtain the center of gravity on a wide range of engines. Speeds inspection, servicing and overhauling. Equipped with friction floor stop, removable oil pan, steel ball bearing casters. Write or wire for descriptive literature on our complete line of stands for aeroplane and tank engines.

Staley MANUFACTURING CORPORATION

COLUMBUS, INDIANA, U. S. A.

DESIGNED to deliver the GOODS



Photo — Courtesy Consolidated Vultee Aircraft Company

STANDARD CONVEYOR COMPANY is able, through long experience, to specify and build for a diversity of handling needs . . .

A procession of products, of the widest imaginable variety, is pouring off assembly lines today—on time, or ahead of schedule — because Standard Conveyors are helping to channel the flow of production. Whether the rate of manufacture is several hundreds a minute or one an hour, Standard builds the right type of conveying equipment to meet the situation.

The range and versatility of Standard Conveyor equipment is the result of nearly 40 years of close contact with inside-the-plant transportation — in plants large and small, making products as widely diverse as steel or cosmetics. Check with Standard Conveyor for the right kind of conveying equipment to "deliver the goods" faster — at lower cost — now or for postwar production.

Write for comprehensive reference book — "Conveyors by Standard" — Catalog No. A-114.

STANDARD CONVEYOR CO.
General Offices: North St. Paul, Minn.
Sales and Service in Principal Cities

STANDARD Gravity and Power CONVEYORS



TIERING AND LIFTING MACHINES | PORTABLE PILERS | SPIRAL CHUTES | PNEUMATIC TUBE SYSTEMS



Picture of Republic Employees massed to honor a returning Thunderbolt ace . . .

10,000 THUNDERBOLTS!

The 10,000th Republic Thunderbolt is on its way to the fighting front. On the day it came off the assembly lines, there was a moment's pause for the "christening," a hearty cheer, and the line started moving again. A small incident, perhaps, in a world at war... but a significant one.

Created to do things no airplane had ever done before, the Thunderbolt has helped our Air Forces solve one tactical problem after another... from long distance bomber escort to dive-bombing and ground strafing. Today, bearing the colors of five United Nations, the Thunderbolt fights on every front and from the remotest outposts.

The Thunderbolt is a complex machine, heavily armed and armored, superpowered, highly supercharged. It weighs more than eight tons. It costs $100,000. It takes 20,000 man-hours to build. It was created and produced in record time in record quantities—10,000 in 27 months—not by a "miracle" but through typical American ingenuity, downright hard work and splendid coöperation by thousands of people—civilian and military.

Republic is proud, naturally, of the technical excellence of the Thunderbolt, of its production record, and of the superlative battle record of the pilots in whose hands it springs to life as a weapon of war.

WRITE THAT BOY TODAY V-MAIL

But Republic is prouder still of the spirit of those Americans who joined hands and brains to build it, and who today press on to new thousands of Thunderbolts . . . and Victory!

Republic Aviation Corporation, Farmingdale, Long Island, New York, and Evansville, Indiana.

Republic *firsts* in war point to *firsts* in peace

REPUBLIC AVIATION
CORPORATION
Specialists in High-speed, High-altitude Aircraft

the U. S. is not producing airplanes for civilian use, but because of existing restrictions governing the exportation of even small, strategetically unimportant, used planes, not even planes which might be stored in hangars in the U. S. unused can so much as cross the border for sale in Mexico.

If Mexico, and the same undoubtedly applies to other countries allied in the war effort, goes on being denied available equipment, then the situation is deplorable indeed.

Future flying in Mexico holds many promises, not only in the business world and because of great economic justification, but also for the presently untapped riches available only to such means of transportation. Even today, in the midst of strenuous measures, when all available means are being utilized to bring out precious and needed metals, many important and rich sources are by necessity being ignored.

It may be safely said that no deposits in ores, whether of gold, iron, silver, mercury, mica, copper, lead, etc., now exist which have not been previously discovered and evaluated by the Spanish Conquistadores who arrived here many years ago. Yet, despite the known existence of such remaining, untapped supplies, none of them is available for production because they are inaccessible except by air.

Those which are being worked today produce only in proportion as their output can be hauled away. Those which will be tomorrow's bonanza can only be tapped by access through the only new development in Mexico's last 400 yr.—the airplane. They await only the coming of their airborne discoverer. Each of them (or at least so it seems to passing pilots) has just enough space adjacent to accommodate a small ship. Meanwhile here these opportunities wait—and will go on waiting, unchanged, until such time when civil aviation comes into its own in Mexico.

And so—prospective flyers in Mexico—adjust your stabilizer for the climb and set that mixture lean. You start off high to begin, but there's plenty of room over Mexico. And down below there still remain untold riches in the earth and of it—dreamed of but not yet fully explored by man himself. "Finder's keepers" says the old adage—and who knows whose wings will be the first to cleave the virtually unbroken air in so many as yet unpioneered places.

Curtiss-Wright Transport

(*Continued from page* 120)

profile, is being incorporated in the current military models. Deep side windows are designed to give greater visibility in landing operations, and the windshields are of the "bird-proof" construction recommended by CAA. Double-pane safety glass equipped with defogging nozzles insures clear vision in cold weather.

Every control surface on the new craft is all-metal; on the military version ailerons have been fabric covered. Aerodynamic balance and spring tabs have been

To protect your product against costly failures due to



Nowhere else can you obtain *all* of these benefits, to enhance the salability, performance, and reputation of your product:


1. Distinctive properties of resistance to wear, impact, fatigue, corrosion.
2. A series of engineered alloys—with physical properties to fit your application.
3. Quality control to hold these properties within narrow limits.
4. Diversified production facilities, coordinating in one place all the commonly used metalworking processes.
5. Engineering and production "know-how" to give you a practical manufacturing program.
6. A nation-wide organization of field engineers to assist you.
7. A record of proved performance in hundreds of leading makes of equipment.
8. A national reputation that makes Ampco Metal parts a sales asset.

Send us your prints when you are ready to consider materials. Write for bulletins. *Ampco Metal, Inc., Dept. A-11, Milwaukee, Wisconsin.*

AMPCO Metal
The Metal without an Equal


Ampco Field Offices in Principal Cities.

A-7B

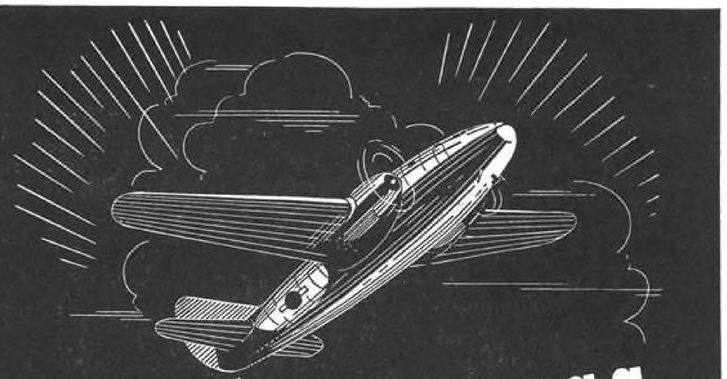

It's HYDRAULICS by SIMMONS

Probably the greatest transportation ship in the world is the Curtiss Commando, its war record in hauling personnel and supplies is nothing short of phenomenal. Performance of a ship depends upon the performance of each and every part of that ship and this is particularly true of the great Curtiss Commando because of its outstanding performance in every theatre of the war under all kinds of conditions. ♦ We here at Simmons have a "hairsbreadth" precision job in the making of the hydraulic flap control cylinder for the Curtiss Commando. Here is a specific case where accuracy means nothing short of undeviating accuracy, true dimensions and absolute uniformity in each and every part of the flap control cylinder. ♦ The same unsurpassed ability, engineering skill, mass precision methods and manufacturing facilities that made this precision unit are at your disposal. Drop us a line, our engineers will be glad to work with you.

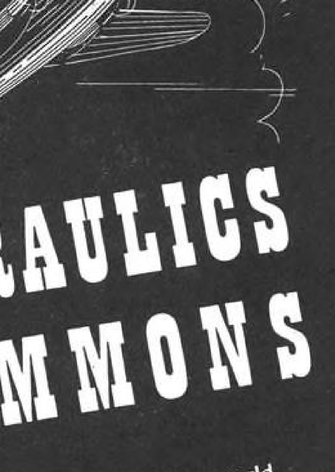

CURTISS COMMANDO
FLAP CYLINDER

SIMMONS *Manufacturing Co.*
ASHLAND • • • OHIO

substituted for hydraulic boost on the controls.

Pilots of major airlines cooperated in setting up pilot's cabin arrangements, which include two seats for pilots and a jump seat for a third crew member. All controls have been located forward to eliminate the need for reaching backward. Both fluorescent "black light" and incandescent lighting are provided.

In the mockup shown correspondents, the galley is located just aft of the pilots' cabin, with a Dutch door between it and the passenger cabin for converting the galley into a serving pantry. A special exhaust duct is designed to keep food odors from the passenger cabin. Finished in polished metal, the galley has a Dutch oven, grill, toaster, mixer, and baby bottle warmer, also a separate counter for a snack bar, as well as usual food-serving equipment.

Passenger seats are arranged in pairs flanking a center aisle. Flush-type ash trays are built into the arm of each reclining chair, and each window has a ledge in the lower frame for small personal articles. An overhead rack for hats and small pieces of luggage runs the full length of the cabin, with individual reading lights and service buttons set in the lower surface. Main cabin lighting is contained in a single fluorescent fixture running the full cabin length.

Stewardess quarters are located just aft of the passengers' seats opposite the left-hand entrance door. A desk incorporates control panel for cabin, vestibule, and lounge lights, and heaters and ventilating system, the latter designed to change the air once every minute.


Separate rest rooms have been installed, with windows set above the boudoir table in the ladies' room and flanking the mirror above the wash basin in the men's room.

Mail, cargo, and luggage compartments contain 526 cu. ft. of space, said to be greater per passenger than in any other transport plane. Both compartments are located below the cabin floor, with access through doors on the right side of the fuselage—away from the passenger entrance.


Like its predecessors, the original CW-20 (which is still being used by the British Air Ministry) and the C-46, the CW-20E was designed by George A. Page, Jr., director of engineering for C-W's Airplane Division, and it follows specifications resulting from an extensive survey conducted by the corporation to determine the type of equipment necessary for medium-range transport operations. (Also see AVIATION's Design Analysis of the Curtiss Commando, August, 1943)

Specifications and Data

Passenger capacity	36-42
Span	108 ft.
Length	76.3 ft.
Height	21.7 ft.
Wing area	1,360 sq. ft.
Normal gross takeoff wt.	48,000 lb.
Maximum gross landing wt.	46,400 lb.
Mfgr's. wt. empty	32,100 lb.
Design useful load	15,900 lb.
Maximum payload	12,430 lb.
Cruising speed (10,000 ft.)	242 mph.
Power plant	Two 2,200-hp Wright Cyclone C18-B2
Propellers	Three-blade full-feathering constant-speed Curtiss Electrics

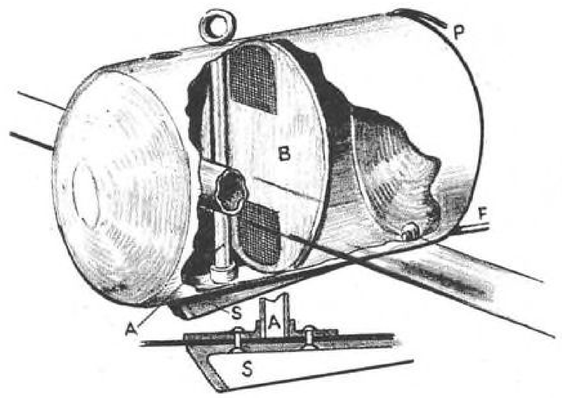

Above: Phantom view of fuel tank shows how tubular wing spar passes through it. Lift tube (A) is secured to a plate and to launching shoe (S), a section of which is depicted here to indicate how it acts as a hook. Baffle plate (B) has two openings closed by heavy steel wire screens. Fuel outlet is at (F) and air pressure inlet at (P)

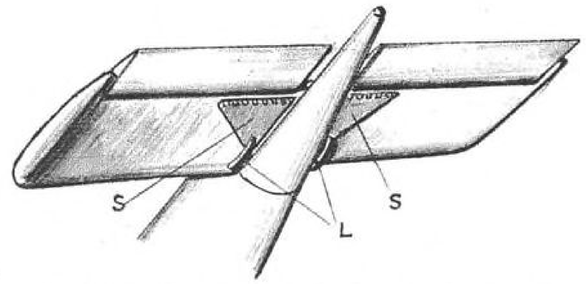

Above: Spoilers (SS) are hinged to bottom rear edge of stabilizer and held down by levers (LL). These are apparently secured by a latch. A spring releases them and at same time apparently locks elevators and rudder. Spoilers blow out and, as they are of different size, undoubtedly put bomb into spiral as it dives.

Nazi V-1 Bomb

(*Continued from page* 191)

the fuel is consumed during flight. The tank has a filler opening at the top, an opening which is closed with a flush-type cap. In the middle of the tank is a 1/6-in. thick vertical baffle plate to reduce surge when launching. Heavy steel-wire screens are welded over the top and bottom openings in this baffle plate. The walls of the tank, of about 1/16-in. steel, form the center section of the fuselage.

The wing is quite thick, about 10-in. deep at the root and 6 at the tip. The over-all width is given by the British as 17 ft. 6 in. The leading edge is nearly straight. Root and tip chords are about 44 and 28 in., respectively.

Wing skin, fully 1/16-in. thick, apparently is welded to the ribs. It is possible that the top and bottom and leading edge were formed, in one piece, with the trailing edge then welded along a transverse seam to complete the wing. There is apparently no dihedral in the wings. Neither are there any ailerons. The wing tips are square and are closed by separate stampings welded to the end of the wing skins.

The spar is tubular and extends from tip to tip through the fuel tank. It is of approximately 5-in. dia., with 1/8-in. wall seamless-steel tube, reinforced by another 1/8-in. wall tubular member rolled around it from a steel strip. This is about 3 ft. shorter than the main spar tube. There is a ⅛-in. gap on the rear neutral axis of the spar where the edges of the strip fail to meet. Here the edges are welded together and to the inner tube at about 1½-in. intervals.

At the tip end of the spar and at two points equidistant between it and the fuselage there are ⅜ x ¾-in. bands, either to reinforce the tubing or the points where the wing ribs are welded to the spar. It is quite possible that with this steel construction only three ribs are necessary between the fuselage and the tip.

The steel wings appear to lend something of an armor function. The starboard wing of a wrecked bomb, for example, was well creased by machine gun bullets, but it evidently took a shell to pierce it. Even though this shell exploded inside the wing, the skin was only pushed outward about an inch adjacent to the point of explosion.

Contained in the fourth section of the fuselage are two spherical air pressure tanks. These are apparently designed to take high pressure, for they are wound with piano wire and look very much like a housewife's ball of string because of the way the bands are criss-crossed. Each band comprises three layers of 16 strands of about 1/16-in. dia. wire.

The spherical tanks are of approximately 20-in. dia., probably welded at the equator. Taps for air are at the top and bottom poles, and air line connections can be reached through an inspection plate on the port side of the fuselage section. At the rear end of this section there is bolted a ⅛-in. steel bulkhead. This may be part of the automatic control section or a reinforcement to take the thrust of the impulse engine. Each air tank is held in place by a single heavy strap arranged diagonally across the fuselage.

(*Continued on page* 291)

only 3 seconds

to change frequencies



Most modern ground station transmitters have so many tuning controls that rapid manual or automatic frequency changing is a major problem. The Collins 231C large ground station transmitter contains an amazing device—the Collins Autotune Unit which automatically controls changing frequencies in a matter of three seconds!

A development of the Collins Radio Co. of Cedar Rapids, Iowa, the Autotune Unit has proved of great value in wartime radio because of its flexibility and accuracy. This complex instrument is built with an unusual degree of mechanical finesse. Callite Silver Contacts were chosen for the tap switches driven by the Collins Autotune in the grid and plate networks. This is one of many instances where Callite Contacts contribute to dependable performance in precision mechanisms. Callite Tungsten Corporation, 545 Thirty-ninth Street, Union City, N. J.

Callite CONTACTS

R_x FOR R*-DAY
(*Reconversion)
Discuss your post-war product plans NOW. If they include silver, platinum, palladium, tungsten, molybdenum, components, our accumulated experience is worth having. We can help on cost cutting, material selection and designing.

CALLITE TUNGSTEN CORPORATION CT



Buy More War Bonds

Spotlighted in today's war production program are the hardened and precision ground parts made *in great volume* by Allied Products Corporation. Some of these parts, which are being made for top-flight aircraft engines, guns and other matériel of war, are finished to within limits of two ten-thousandths of an inch.

Projected into the postwar period, the facilities which have made possible Allied's wartime accomplishments will provide a deep reservoir of craftmanship, mass production machinery, and practical experience for manufacturers of consumer goods.

If you are planning a postwar product, and are looking for a dependable, economical source of tools and hardened and precision ground parts, get in touch with Allied Products Corporation now.

"IT'S AN ALLIED PRODUCT" . . . Allied Products Corporation and its divisions, Richard Brothers and Victor-Peninsular, in Detroit and Hillsdale, Michigan, also make: Sheet metal dies, from the largest to the smallest; steam-heated plastic molds; jigs and fixtures, the original R-B Interchangeable Punch and Die; cap screws; cold forged parts; and other products.

ALLIED PRODUCTS
CORPORATION
Executive Offices: 4646 Lawton Ave., Detroit 8, Michigan
All Four Plants Have Added Stars To Their Army-Navy "E" Pennants

The automatic pilot section apparently contains a horizontal shelf across its middle to support the automatic pilot. A large door is bolted to the upper port quarter of this section of the fuselage to give access to the automatic pilot. At the front end of this section of the fuselage there is a vertical, heavy walled tube supporting the impulse motor. Attached to the top and bottom of the fuselage, this tube has a forked arrangement on the upper end. The fork is fastened with trunnion bolts to the sides of the impulse-engine casting at its horizontal center line.

Last section of the fuselage is a conical member that carries the stabilizer, elevators, fin, and rudder. In it are the air-servo controls which direct and control the elevation of the bomb. A vertical tubular member attached to the rear end of the tail cone forms the back of the fin and the hinge member for the rudder. At its upper end it forms a cradle in which the engine tube rests.

It is not evident whether this is secured to the engine duct, but judging from the red oxide coloring of the duct, it would evidently be desirable to leave it unattached so the duct can expand freely under the red hot operating temperatures at which it appears to function.

According to the British, the air pressure is used to feed the fuel and run the automatic pilot. The light rubber tubes attached to the remains of the automatic pilot would suggest that low air pressure runs the gyros and controls. A pressure reducing valve obviously must be used, although none was visible.

Center line of the impulse engine is about 30 in. above the center line of fuselage, and nose cowling of the engine is of about 20-in. dia., while the tail end of the duct is between 12 or 13-in. dia. The nose cowling apparently takes the entire thrust of the engine and transmits it through the vertical tube to the fuselage. The tube not only drives but supports the heavy steel vertical grill in the front of the engine tube.


On the back of the grill there appear to be a series of quick-acting reed-type valves which are instantly responsive to variations in pressure. Inside the duct, a short distance behind the grill are three venturi passages through which the mixture of air and gas must pass. There are nine fuel jets on the rear surface of the grill. The feed line probably comes from the automatic pilot chamber through the vertical driving tube to the grill jets. The fuel is fed by air pressure.

The English explanation is that the three top jets also include air jets to atomize the fuel. Arrangement of the jets in the grill provides the proper fluctuating supply of fuel to the combustion chamber, it is claimed, and corrects the mixture strength according to the forward speed of the bomb, and also for altitude changes. Nothing was visible of this structure; but from what could be observed, our illustrative sketch was made to suggest how it might be accomplished.

Operation of the engine is very simple. The bomb is launched by a catapult device which gives it a speed of about 150 mph. The air pressure thus built up in front of



BOTH are ENGINEERED for the Job

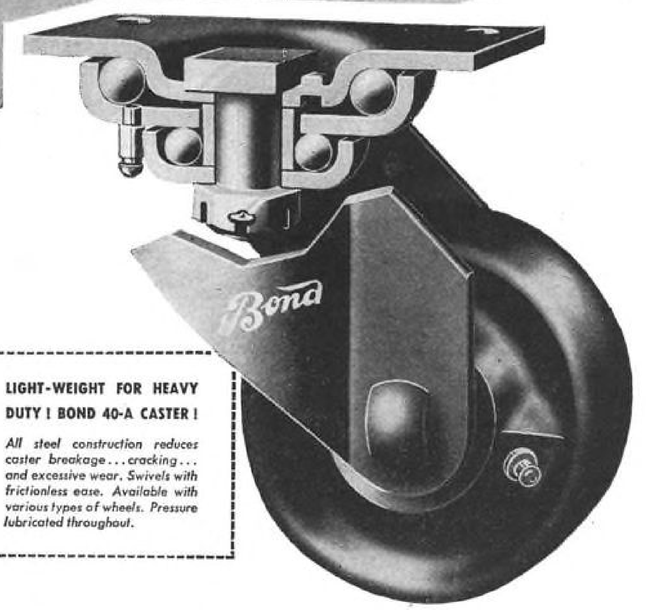

LIGHT-WEIGHT FOR HEAVY DUTY ! BOND 40-A CASTER !

All steel construction reduces caster breakage . . . cracking . . . and excessive wear. Swivels with frictionless ease. Available with various types of wheels. Pressure lubricated throughout.

LIKE skyscrapers, truck casters must be engineered for load factors and service conditions. Ball race and base . . . fork and king bolt . . . axle and tread . . . every part of a Bond Truck Caster is engineered with thorough consideration for practical performance. Every Bond Caster is right for the job because it's *built-for-the-job.*


Casters are engineered equipment and must be bought with care. You need the right information to make the right selection . . . and you'll find it in Bond Catalog K-34. Write today for your free copy.

BOND FOUNDRY & MACHINE COMPANY, MANHEIM, PA.

Bond* TRUCK CASTERS

* Reg. U. S. Pat. Off.

OUT OUR WAY

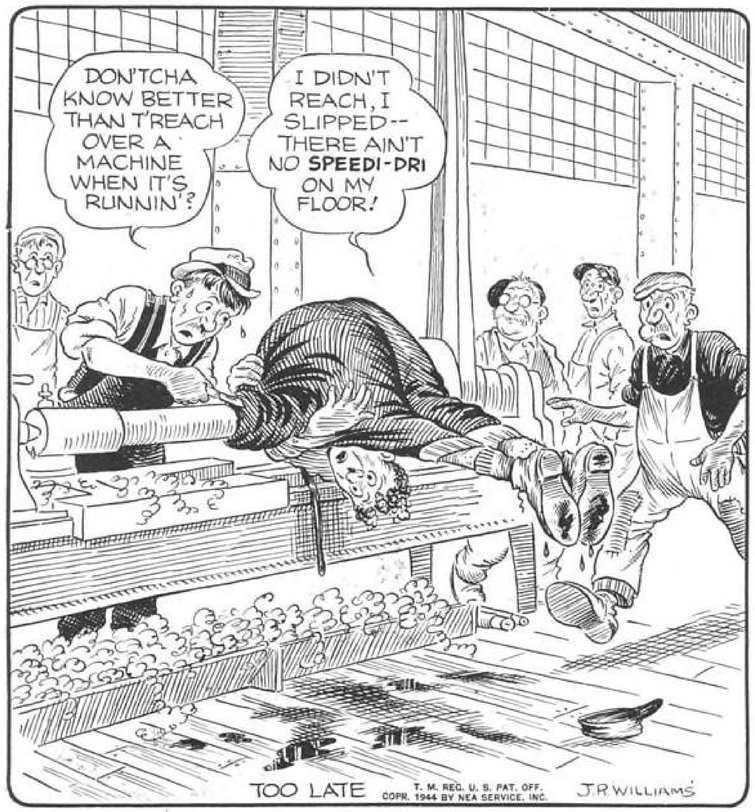

SPEEDI-DRI is a white, granular substance that's thirsty for oil and grease. Spread by hand without interrupting production and easily swept up with a stiff brush, it reduces porter-labor to the minimum and saves the cost of expensive scouring equipment. At the same time it does a *better* job, because it *absorbs* the oil and grease . . . even taking out years-old deposits, in time.

No matter how greasy a floor, it becomes slip-proof the minute it's SPEEDI-DRIed. This cuts costly accidents, saves man-power, and speeds production. In addition, SPEEDI-DRI saves work-shoes from oil-rot, brightens the plant, and improves morale. SPEEDI-DRI is non-combustible. It will not readily burn even when oil-soaked. It gives double the efficiency at a fraction of the cost of old-fashioned floor-cleaning methods. Write for the facts . . . and a FREE SAMPLE.

SUPPLIERS: East—Refiners Lubricating Co., New York 1, New York.
Midwest & South—Waverly Petroleum Products Co., Philadelphia 6, Pa.
West Coast—Waverly Petroleum Products Co., Russ Bldg., San Francisco 4, Calif.

SPEEDI-DRI
OIL AND GREASE ABSORBENT

the grill opens the reed valves and air is forced into the combustion chamber. When the valves open up they probably allow the fuel to flow into the air stream through the nine jets in the grill, thus forming an explosive mixture.

In the venturi section there is a spark-plug which starts the combustion. Once the combustion is initiated the subsequent charges are fired by the temperature of the tube walls, heated by the previous charge.

The resultant combustion raises the internal pressure above that on the front of the grill and so causes the reed valves to close. Therefore the products of combustion can only escape from the rear end of the engine duct, giving jet propulsion. As soon as the internal pressure drops below that on the front of the grill, air rushes in again, picks up more fuel, forms a mixture, is ignited, causing the reed valves to close, and the cycle is repeated.

Weight of the complete ready-to-launch flying bomb is given as 4,700 lb. Its speed is variously given from 250 to 360 mph., although the latter figure seems pretty high.

The impluse engine is said to develop 600 hp., if it can be so rated. It consumes eight times as much fuel as a conventional gasoline aircraft engine, according to press dispatches. However, it only requires low-grade fuel instead of high octane gas.

Although the British description of the automatic pilot says there are three air driven gyros, remains of the automatic pilot indicate that it only has two. Since there are no ailerons to operate, a third gyro might be considered unnecessary. The writer has been told that if the two gyros are placed at the proper angle it might be possible to obtain the kind of control which the flying bomb obviously has.

One gyro controls the rudder and has wires which probably connect it to the magnetic compass in the nose. This would provide the means of putting the craft on course, and there must be a control which can be set to determine the final course of the bomb.

The elevator is apparently controlled by another gyro, but it evidently has a barometric capsule control attached in such a manner that it maintains the bomb's flying altitude. One of the control dials on the automatic control had graduations reading 375-400-425-450, etc. This may have been for pre-setting the altitude control. Calibration was judged to be in meters.

The pneumatic servo mechanisms for operating both rudder and elevators look alike. They appear to be die-cast aluminum cylinders of about 1½-in. dia. with about a 2-in. stroke. On the side of the cylinder there is what appears to be a diaphragm housing with control tubes to each side. Each diaphragm must control the valve that causes the servo piston to move. It is obviously a servo mechanism because of a spring attached to the piston rod on one end and probably to the valve on the other end, so that it cuts off the air supply when the correct piston movement has been obtained.

There is much speculation as to how the flight distance is determined. Some think the supply of fuel carried determines this. Another theory is that when the air pressure fails the bomb falls. Clocks may also be a means of setting off the bomb. Some say a pin wheel device on the nose does it—a method used to arm most bombs.

The clock method sounds quite rational. The failure of air pressure does not seem practical, for there is evidence that air pressure may be needed to lock the empennage controls and release the spoilers when the bomb is ready to be fired. Whether this action also cuts off the fuel was not evident from the wrecked sample, but it is quite possible. This is substantiated by a spring-operated mechanism on the underside of the stabilizer which seems to be released by air pressure before the spoilers can come into action and nose the bomb down.

For starting purposes, there is a valve on the bottom of the automatic pilot section which apparently controls the fuel and ignition. This is operated by a push button and is in the "off" position until the bomb leaves the ramp. Then it is spring-opened, whereupon fuel flows to the grill and an electric ignition switch is closed to spark the engine. This control is a very important part, for the wires are carried through a key-lock switch on the starboard side. This is a tumbler lock operated from the outside with a key, and is apparently a safety device.

It is reported that the bombs are launched from ramps 170-ft. long and of 32-in. gage, but the exact manner in which they are catapulted into the air has not yet been explained. To get the bomb into the air with a terminal velocity of 150 mph. in 170 ft. only requires 1.5 sec. and the application of about 1,000 hp. per sec. Perhaps an explosive charge is used to accomplish this.

Apparently 150 mph. is the minimum speed at which the impluse engine can be started, but once started it has power enough to continue accelerating until it has reached its top speed.


Some of the launching ramps are in a direction other than that toward the objective, thus requiring a timing device—perhaps a spring- or electrically-operated clock used to time both the turn and the total length of flight. This may explain why some bombs have been found with clockworks in them. For the first stage of the flight the compass control must be cut out, but after a certain number of seconds of free flight, the compass control would be automatically connected and the bomb required to follow the preset course under compass control.

Snow and the RCAF

(*Continued from page* 165)

fitted with adjustable blades to level off drifts after severe storms. A stop is provided so these levelling bars may not be lowered to the surface and used instead of the drag. If this bar is set too low it will gouge out sections of the surface due to rocking of the rollers. Adjustable angle-iron drags scarify the surface, reduce the compacted snow, and remove

THE *Best* EQUIPMENT NEEDS THE *Best* COMPONENTS

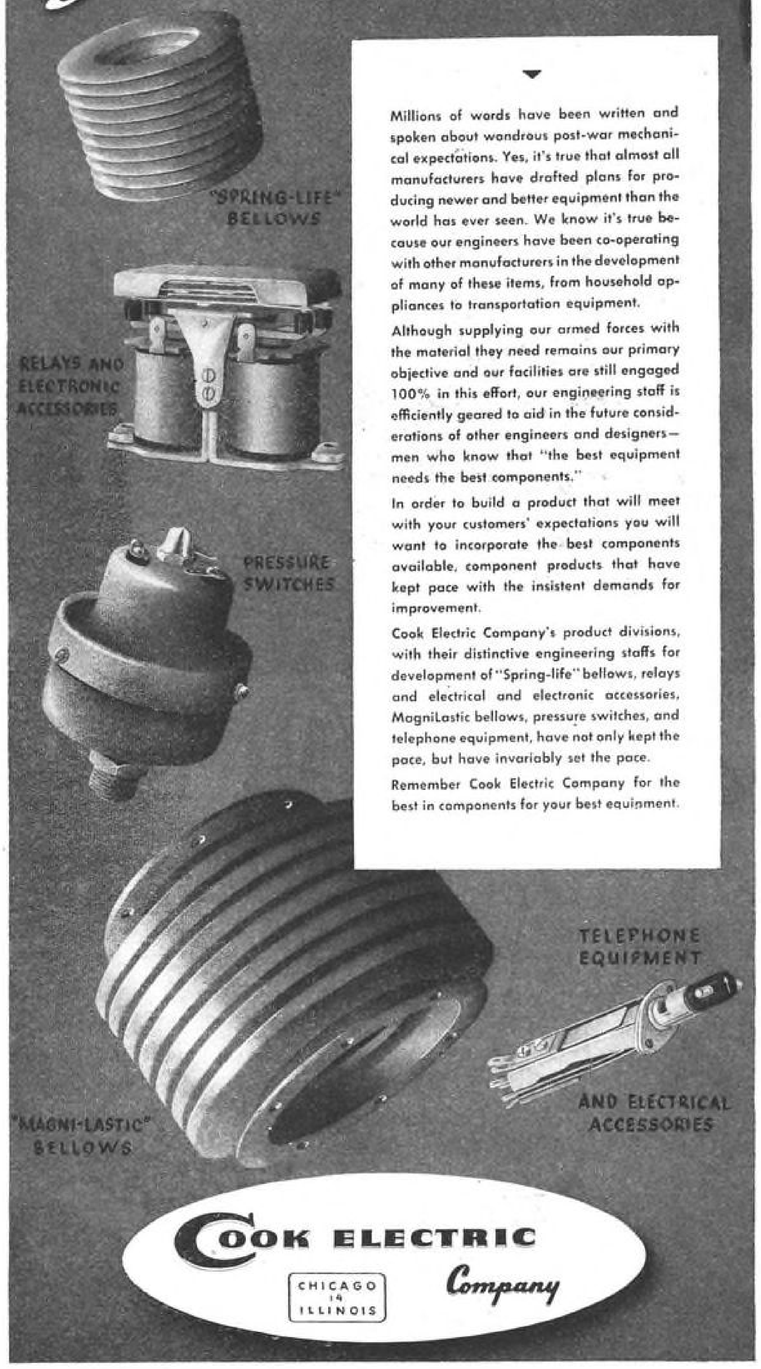

Millions of words have been written and spoken about wondrous post-war mechanical expectations. Yes, it's true that almost all manufacturers have drafted plans for producing newer and better equipment than the world has ever seen. We know it's true because our engineers have been co-operating with other manufacturers in the development of many of these items, from household appliances to transportation equipment.

Although supplying our armed forces with the material they need remains our primary objective and our facilities are still engaged 100% in this effort, our engineering staff is efficiently geared to aid in the future considerations of other engineers and designers—men who know that "the best equipment needs the best components."

In order to build a product that will meet with your customers' expectations you will want to incorporate the best components available, component products that have kept pace with the insistent demands for improvement.

Cook Electric Company's product divisions, with their distinctive engineering staffs for development of "Spring-life" bellows, relays and electrical and electronic accessories, MagniLastic bellows, pressure switches, and telephone equipment, have not only kept the pace, but have invariably set the pace.


Remember Cook Electric Company for the best in components for your best equipment.

COOK ELECTRIC Company
CHICAGO 14 ILLINOIS

HOLO-KROME INTERNAL HEX WRENCHING BOLTS



INTERNAL WRENCHING

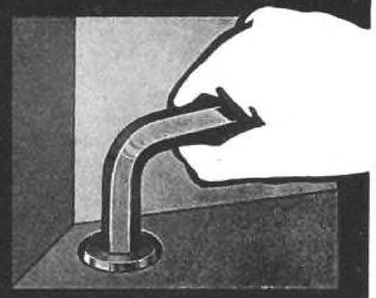

NASC SPECIFICATIONS

QUICK and POSITIVE!

QUALITY-"Like a Jewel"

Saves Weight Space + Time

Manufacturing Holo-Krome Internal Wrenching Bolts by the Holo-Krome patented Completely Cold Forging method is more than a mere production job, well done. It's a quality process for a quality product. "Like a Jewel"—an appropriate expression used in describing "Holo-Krome Quality" . . . Holo-Krome, from the first, met the quality and precision requirements demanded by the Aircraft Industry for Internal Wrenching Bolts. Holo-Krome is proud of this responsibility . . . For quality and precision in this better fastening method, specify "Holo-Krome".

HOLO-KROME Fastening Engineers available for Consultation.

AIRCRAFT DIVISION

THE HOLO-KROME SCREW CORPORATION

MAIN OFFICE & PLANT

HARTFORD 10, CONNECTICUT U.S.A.

ruts. Scarifier teeth on the drags rip up the snow at spring break-up, at which time the crew must give particular attention to temperature forecasts. Sometimes no freezing takes place in the spring, and then no rolling should be undertaken.

During the entire winter the snow-clearing crew must be in close touch with the flight control officer, both to time rolling operations and to keep him informed on the condition of the field.

RCAF has also made use of a combination method of rolling and blowing by which snow is packed 4 or 5 in. deep on the runway. Subsequent snow is all blown off the runway, which never has more than the original depth. When the spring break-up commences, the snow runway is left to disintegrate normally. If a wheel should break through it would make contact with the hard surface beneath. When the snow becomes completely rotten, it is only necessary to scrape it up and blow it off of the runway.

Compacting wet snow during a snowstorm presents special difficulties, because moist snow sticks to the rollers and tractor cleats. To overcome this and insure against interrupted rolling during the snowstorm, a method has been developed using cocoanut matting and a salt solution. Cocoanut matting is nailed to a wooden cross-bar overhanging the roller. The matting is soaked with hot salt water mixed in the proportion of 7 lb. of salt to 5 gal. of water, which will keep a roller in operation for 20 hr.

This method is cheap and easy. It makes possible the complete rolling of an airfield during a snowstorm when the temperature is no lower than 27 deg., making the airfield available for flying immediately after the storm.

For keeping roads in good condition in late winter and spring, the RCAF recommends loosening snow on roads by disking, digging holes in snow drifts to hasten thawing, and using a grader to clear road surfaces and open ditches.

Instrument Overhaul

(*Continued from page* 161)

gases to determine the proper mixture to use for calibrating fuel-air ratio cells.

A collimator for calibration of octants and sextants was also constructed. It is believed to be the only inside collimator in this section of the country. In calibration, this instrument is set on a zero adjustment and checked each 10 deg, through an arc of 90 deg. by sighting of pin-point lights which simulate stars. The brilliancy of these lights is controlled by a rheostat to correspond with the light in the bubble chamber of the instrument. This fixture makes possible the accurate calibration of instruments day or night, rain or shine.

All instruments are overhauled, inspected, and calibrated according to technical orders of the armed forces and manufacturers' specifications.

Since opening of the instrument overhaul department in Nov. 1942, overhaul has been completed of approximately 15,000 instruments of all types for the


"Fast Freighters" of Factory, Terminal and Warehouse . . .

CRESCENT ELECTRIC INDUSTRIAL TRUCKS



← **Crescent Lo-Lif-Toer.** That's a load of generator powder moving along at the Chance Vought Aircraft Company. It's being moved on the truck that's a favorite in the aircraft industry . . . the Crescent Lo-Lif-Toer. This versatile truck hauls, lifts and tows loads up to 3,000 pounds.

Crescent NTW—Imagine one man trying to move that load manually! At the Link Belt Company, one man and a Crescent NTW Tractor move it with ease. These tractors have been adapted to an almost endless number of uses in materials handling. ↓

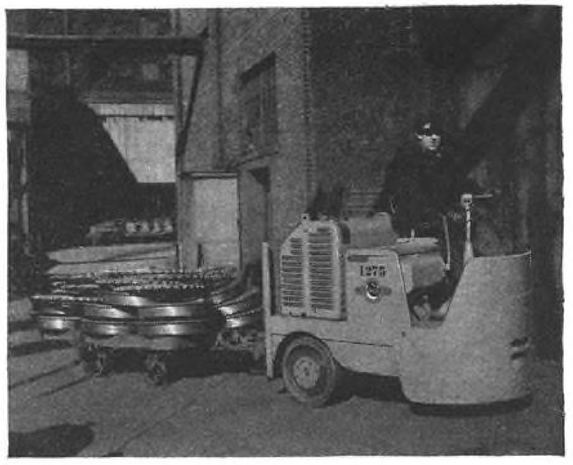

Let Free Up-to-Minute Catalog Help You Select Your Crescents

Here's 24 pages of information, specifications and engineering drawings to help you pick the Crescent Trucks that best meet your materials handling conditions. It pictures and describes all Crescent models now being manufactured under WPB Limitation Orders L-112 and L-112a. Send today for your *free* copy.



Materials are "fast freight" when you move them on Crescent Industrial Lift Trucks . . . the trucks that speed production while saving manpower. Above, are a few examples of the varied ways in which Crescent Trucks serve industry.

CRESCENT TRUCK COMPANY, 1120 Willow St., Lebanon, Pa.

Crescent ELECTRIC TRUCKS and TRACTORS

Industrial Truck and Tractor Specialists for More Than 25 Years

WILEY BOOKS IN

AERONAUTICS



Every day sees new developments in Aeronautics, for which you can prepare with authoritative books such as those listed below. Be ready for new demands. Make your selection and order today from the coupon below.

MANUAL OF AIRCRAFT LAYOUT

By Rudolph Faltus; Assisted by Charles Steinmetz

240 Pages *$3.00*

An indispensable working tool for the aircraft construction mechanic. Covers: layout, drafting, sheet metal, repair, shop mathematics, engineering elements, construction problems, tooling, production planning, template development, blueprint reading.

AIRPORT ENGINEERING

By H. Oakley Sharp, G. Reed Shaw, and John A. Dunlop

150 Pages 8½"x11" *$5.00*

Fundamentals of airport construction: grading and drainage; site and location planning; stabilization; methods of design for subgrade support and surface pavements; taxiways, aprons, landing strips; planning and design of air terminals.

CENTRIFUGAL PUMPS AND BLOWERS

By Austin H. Church

308 Pages $4.50

Supplies basic design theory, construction and application data on centrifugal pumps and blowers from the *American* viewpoint. Essential time-tested material and methods explaining standard practice.

OCCUPATIONAL ACCIDENT PREVENTION

By Harry H. Judson and James M. Brown

234 Pages $2.75

Fundamentals of plant operation required to bring about accident prevention: use of modern tested methods for improvement of work procedures, improvement of plant and equipment, safety groups and related activities.

CARE AND USE OF HAND TOOLS

By R. R. Toliver; Edited by W. C. Lewis

95 Pages Probable Price $1.25

How to handle and care for tools so that they last longer and give better service. Marked by very simple explanations and large, clear illustrations.

HOW TO OPERATE A LATHE

By John T. Shuman and Lewis H. Bardo

161 Pages $1.75

A guide for the training of machine shop operators. Presents factual material in a clear, concise and practical way, by means of questions and answers.

METEOROLOGY THEORETICAL AND APPLIED

By E. Wendell Hewson and Richmond W. Longley

468 Pages $4.75

A well-rounded view of present-day essentials of theoretical and synoptic meteorology, including a chapter on statistical analysis of meteorological data.

AIRPLANE PROPELLER PRINCIPLES

By Wilbur C. Nelson

129 Pages $2.50

This book presents a brief, practical, elementary treatment of fundamental principles underlying the design and operation of the modern airplane propeller. Gives aerodynamic analyses, structural analyses, properties of materials, performance tests, etc.

BASIC AIRPLANE MECHANICS

By Hubert G. Lesley

404 Pages $2.50

A practical book, covering the important facts and procedures which the airplane mechanic must know to keep planes in good working order. The book is the same high calibre as the author's popular "Airplane Maintenance."

AIRCRAFT ENGINE MAINTENANCE

By James H. Suddeth

400 Pages $2.75

Shows just what steps to take in handling any overhaul job. It is up to date, reliable, and a source of quick, first-hand information.

AIRPLANE STRUCTURES—3rd Edition

By Alfred S. Niles and Joseph S. Newell

Vol. I 455 Pages $4.50

Vol. II 439 Pages $4.50

These two volumes cover the analysis of welded tube structures, wooden beams and members, and all-metal or stressed-skin structures, and also offer practical design information.

ON APPROVAL COUPON

JOHN WILEY & SONS, Inc.
440 Fourth Avenue, New York 16, N. Y.

Please send me on ten days' approval the books I have checked in this advertisement (or I am attaching to this coupon a separate list of the books desired). At the end of that time, if I decide to keep the books, I will remit indicated price plus postage; otherwise I will return the books postpaid.

Name .....

Address .....

City and State .....

Employed by .....

A-11-44

AAF. In addition, this department has overhauled and calibrated a large number of instruments for both the Naval Air and Marine services, various airlines, our own company's training aircraft, and those of other WTS units.

In 1943 when it was impossible to get replacement instrument dials, the special projects department again contributed by building a mechanical engraving machine. An additional machine was constructed to handle outside contract work, and a third machine was made for the Embry-Riddle Brazilian div. Engraving is done on any flat material.

Reverse type, used to engrave transparent materials on the reverse side, was made in the following manner: The tracing stylus was inverted and the master type placed upside down over the stylus. When this type was traced, the engraving tool produced a master set of reverse type which can now be used in the regular manner. Engraving on other than flat surfaces is done by hand.

Fatigue of personnel due to the exacting nature of instrument overhaul work, and the accompanying effect of this fatigue on production, was found to require consideration. In order to combat this condition, a combination radio and phonograph with automatic record changing device was installed. Latest news flashes, special events, and music are played at frequent intervals.

Equipment was also provided so that coffee, cold drinks, and other refreshments, are available at all times to provide that necessary "lift."

These little things have contributed a specific increase in production, and they have helped to maintain the excellent morale of the department.

Airline Financing

(Continued from page 192)

being forced to turn, in 1935, to the Reconstruction Finance Corporation for funds on a chattel mortgage at 5 percent. Later on, Northwest Airlines obtained a similar RFC loan. But those days apparently are over.

It is the practice to fix depreciation charges on present DC-3 equipment on a 5-yr. basis down to a residual value of around $10,000. Bankers point out that by using a similar depreciation rate for the transports now on order, the depreciation carried to a residual value of $50,000 would pay for the financing.

Airline officials have a number of reasons for not liking equipment trusts. In fact, Pan American Airways is the only American air transport concern to adopt this method at any time in the past. John W. Newey, financial vice-president of United Air Lines, has pointed out that all the states have laws covering equipment-trust issues by the railroads, and he feels it would be necessary to get legislation passed to use this form of financing for airlines.

The airlines, he further states, will have additional investments to make in ground facilities to handle larger fleets of bigger planes. Equipment trusts, he believes, would not be appropriate for that kind of financing.

E. Lee Tarlman, executive vice-president of TWA, also has raised a number of objections to equipment trusts, pointing out that while a box car is a definite entity, an airplane is an aggregate of thousands of accessories and parts which are frequently disassembled and put together again in a totally different combination.

Another drawback is that international law so far has provided no safeguards against the seizure in foreign countries of aircraft assigned to a bank. If a plane financed by a New York bank is impounded by a foreign government, the bank has no way in which to get its property back. It is true, too, that aircraft have a poor re-sale value compared with railroad cars or locomotives—at least that's been the experience in the past.

The fact that some lines look with favor upon bank loans doesn't rule out additional security issues in all cases. The sale of common or preferred stock in some instances may be expected in view of the relatively good securities markets prevailing. American Airlines stock recently sold so high that the dividend yield was only 1.91 percent while the yield on Northwest was only 1.72 percent, also only 1.47 percent in the case of United.

Yet management in several cases is reductant to dilute present common stock equities. United Air Lines has more than 1,500,000 common shares outstanding plus an issue of preferred, while Braniff has 1,000,000 shares outstanding and TWA has nearly as much stock issued. American and Eastern have retained the smallest capitalization of the "Big Four", with less than 600,000 shares outstanding in each case, and a number of the smaller lines are around the 500,000-share level. Although Northwest recently added 117,460 shares, its total capitalization comes to only 356,380 shares.


Pennsylvania-Central Airlines (with its $10,000,000 transport order) and TWA (with its big Lockheed contract) may be the first lines to seek expansion funds. National has indicated that no stock offering is contemplated in connection with its current expansion. All three lines may start the ball rolling by choosing direct bank loans.

Continuous Beams

(Continued from page 138)

It will be noted that there is no curve in Fig. 6 from which beam factors C_1''' and C'''_2 can be determined. This is due to the fact that the mathematical equations for these factors, as listed in the appendix, cannot be easily plotted in graph form because they involve both the variables R_a (or R_c) and n, the latter depending on the position of the load.

Continuous beams with concentrated loads are rarely used in aircraft structures. When one does occur it can best be handled as described in illustrative problem 3 (hereafter), or by use of Eq. 19a, 20, and 20a, as discussed in the appendix. *(Turn to page 299)*

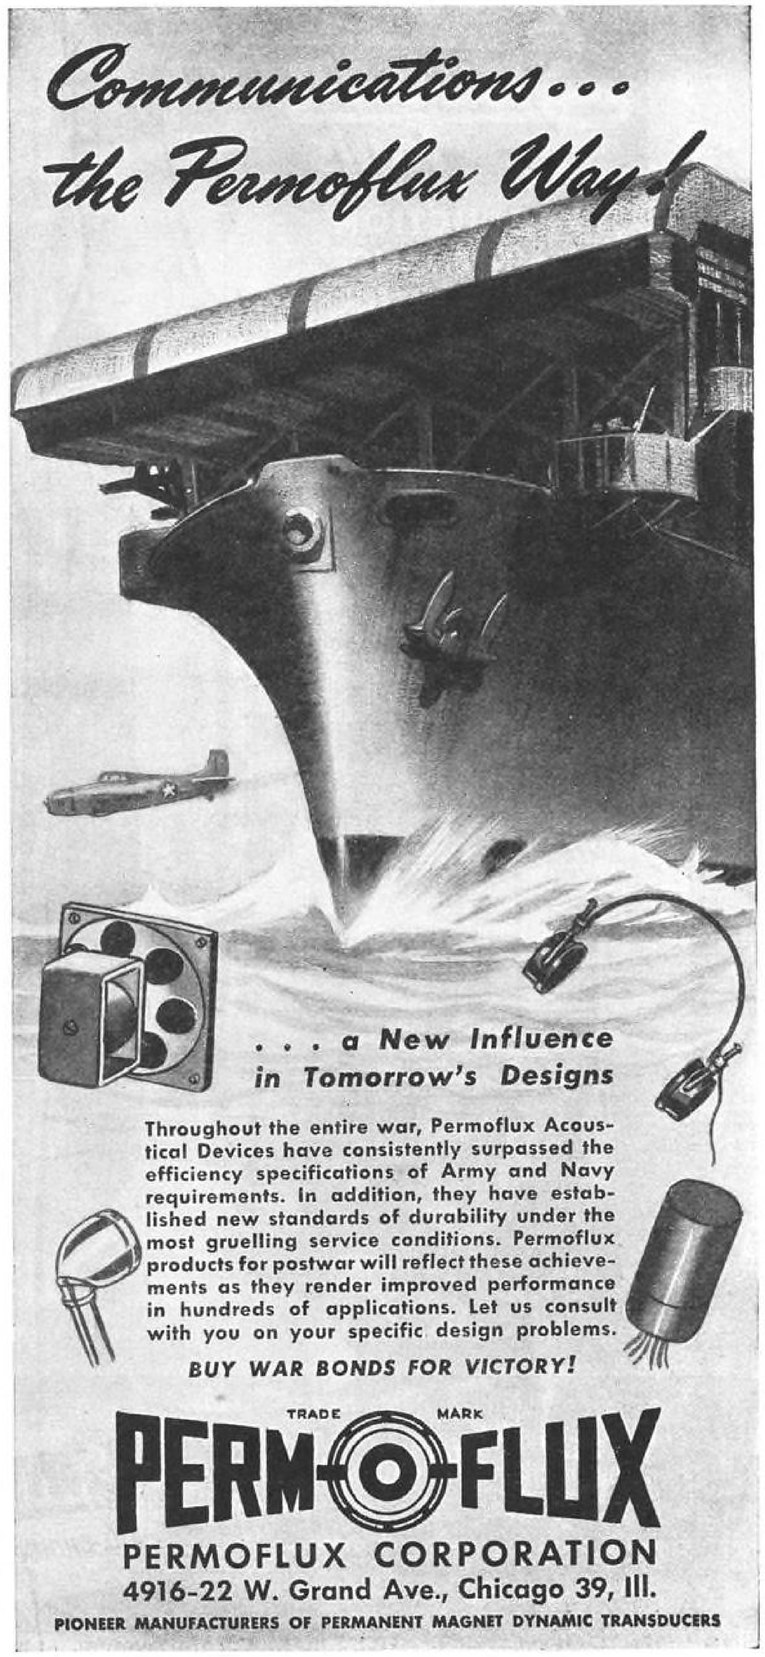



The Right Tool for every job means faster work and better workmanship, lowered costs and increased safety. Everywhere in industry Snap-on tools are giving added efficiency to manpower in production, maintenance and service operations. In hundreds of foremost plants they are "standard equipment" for every hand tool operation. Snap-on's direct-to-user tool service is available through 38 factory branches located in key production centers.

Snap-on Tools
THE CHOICE OF BETTER MECHANICS

SNAP-ON TOOLS CORPORATION, 8020-K 28th Avenue, Kenosha, Wisconsin

Illustrative problem No. 1: Assume a continuous beam loaded as shown in Fig. 7. The supports are unyielding and the modulus of elasticity, E=10,300,000 psi. is constant. The moment of inertia varies according to the equations:

From A to B: $I_k = 1.8(k+1)^2$ $(k = x/L)$

From C to B: $I_k = 11.25(1-0.2k)^2$

Required: Compute M_b (a) Assuming a constant I in each span equal to the arithmetic mean of the end I's, and (b) by the exact formulas, using the beam factors obtained from Fig. 6.

Solution: Part (a)—Constant I. An inspection of the beam indicates Case 2 for span 1 and Cases 1 and 3 for span 2. Therefore, the equation combines parts of Eq. (1a), (3a), and (5a) as follows:

$$\alpha M_a + 2(\alpha+\theta)M_b + \theta M_c = -\frac{4L_2W'_1\alpha^2}{45} - \frac{L_2W_2\theta}{4} - \frac{7L_2W''_2\theta}{30}$$

or: $$\alpha M_a + 2(\alpha+\theta)M_b + \theta M_c = \frac{L_2}{60}\left[16W'_1\alpha^2 + \theta(15W_2 + 14W''_2)\right] \quad (a)$$

$M_a = -40 \times 10 = -400$ in.-lb.
$M_b = -20 \times 10 = -200$ in.-lb.
$W_1' = -.5 \times 12 \times 60 = 360$ lb.
$W_2 = 12 \times 30 = 360$ lb.
$W_2'' = .5 \times 6 \times 30 = 90$ lb.

$I_a = 1.8(0+1)^2 = 1.8$ in.^{4}
$I_b = 1.8(1+1)^2 = 7.2$ in.^{4}
$I_c = 11.25(1-0)^2 = 11.25$ in.^{4}
$(I_b = 11.25(1-.2)^2 = 7.2$ check)

$I_1 = \frac{1.8+7.2}{2} = 4.5$ $L_1 = 60$ in.

$I_2 = \frac{7.2+11.25}{2} = 9.225$ $L_2 = 30$ in.

$\theta = I_1/I_2 = 0.488$ $\alpha = L_1/L_2 = 2$
$2(\alpha+\theta)M_b = 4.976M_b$
$\alpha M_a = -800$
$\theta M_c = -98$

$16W'_1\alpha_2 = 16(360)(2)^2 = 23{,}040$
$15W_2\ \theta = 15(360)(.488) = 2{,}635$
$14W''_2\theta = 14(90)(.488) = 615$
$26{,}290$

$$4.976M_b = \frac{-30 \times 26{,}290}{60} + 800 + 98 = -12{,}247$$

and $M_b = -2{,}461$ in.-lb.
(Answer — Part (a))

Part (b): Varying I — Combining parts of Eq. (2a), (4a) and (6a):

$$\alpha C_aM_a + (\alpha C_b + \theta C'_b)M_b + \theta C_cM_c = -L_2C'_1W'_1\alpha^2 - L_2C_2W_2\theta - L_2C''_2W''_2\theta$$

or: $$\alpha C_aM_a + (\alpha C_b + \theta C'_b)M_b + \theta C_cM_c = -L_2[C'_1W'_1\alpha^2 + \theta(C_2W_2 + C''_2W''_2)] \quad (b)$$

Using duplicate data from Part (a); factors from Fig. 6:
$R_a = I_b/I_a = 4 — C_a = .080$; $C_b = .114$; $C'_1 = .0178$
$R_c = I_b/I_c = 0.64 — C_c = .208$; $C'_b = .465$; $C_2 = .0545$; $C''_2 = .0495$
$\theta = I_a/I_c = 0.16$; $\alpha = 2$
$\alpha C_aM_a = 2 \times .080 \times (-400) = -64.00$
$\theta C_cM_c = .16 \times .208 \times (-200) = -0.67$
$(\alpha C_b + \theta C'_b)M_b = (2 \times .114 + .16 \times .465)M_b = .302M_b$
$C'_1W'_1\ \alpha^2 = .0178 \times 360 \times 4 = 25.63$
$C_2W_2\ \theta = .0545 \times 360 \times .16 = 3.14$
$C''_2W''_2\theta = .0495 \times 90 \times .16 = .71$
29.48

$.302M_b = -30 \times 29.48 + 64.00 + 0.67 = -819.73$
and $M_b = -2{,}714$ in.-lb.
(Answer — Part (b))


SUB-ZERO Temperatures "LICKED" THE NAZIS IN RUSSIA



One of the fatal mistakes the Nazis made in developing their army equipment was to underestimate the intense cold of the Russian winter. Motor lubricants, hose lines for fuel and hydraulic connections, and other armament components had not been designed for that type of service. Likewise, our aircraft before we entered the war was not equal to the very high altitudes at which many aerial battles have been fought.

There is only one sure way to determine the effects of extremes in temperature, pressure and humidity — a properly engineered test chamber in which any kind of weather from that of the tropics at sea level to the stratosphere may be duplicated at will and in accordance with close timing.

KOLD-HOLD MANUFACTURING COMPANY
446 NORTH GRAND AVENUE, LANSING 4, MICH.

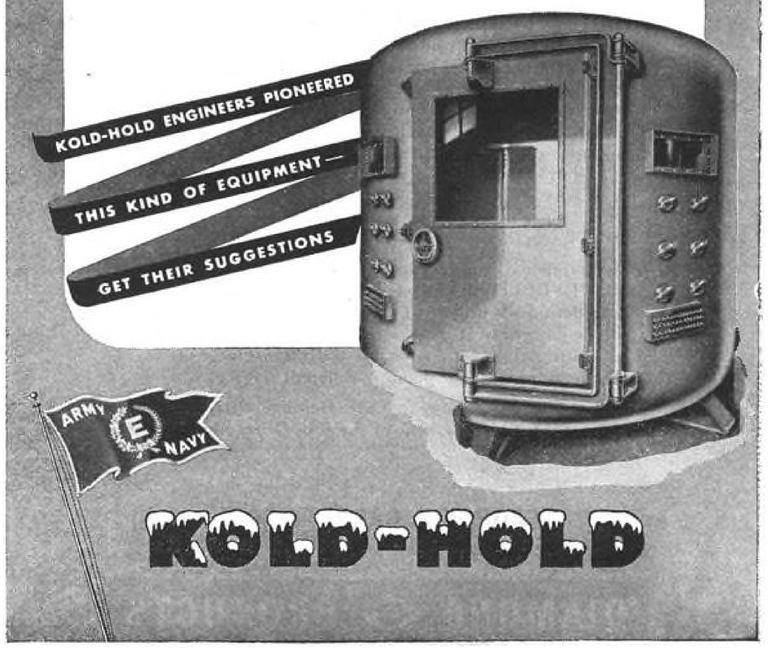



There's plenty of romance in the life of DIAMOND G. From rockets to radar, clocks to cannon, "Controlled Tension" Diamond G Lockwashers and Flat Washers serve throughout the world . . . in war, industry and science.

Designed by skilled engineers . . . fabricated, annealed and torture-tested under rigid supervision and control . . . Diamond G Flat and Spring Lockwashers are tougher, surer, safer in performance. Diamond G was first to introduce "Controlled Tension" in a Spring Washer . . . tension that keeps the washer tight in place in spite of heat, cold and violent action. "Controlled Tension" has definitely minimized slipping, loosening, excessive wear and breakdown. Adequate bearing surface plus positive spring action assures DOUBLE DUTY service on every job.

Remember . . . modern high-speed production assures RAPID DELIVERY of your orders at all times. If your problem deals only with metal washers . . . or if it concerns design, heat-treating, stamping or fabrication of small metal parts . . . consult Garrett engineers today. Write or phone, for prompt, efficient service.

Write for your copy of the October "Diamond G Digest." It features some of the jobs George K. Garrett can do for you.

GEORGE K. GARRETT CO.
1421 CHESTNUT ST., PHILADELPHIA 2, PA.

DIAMOND G PRODUCTS

Summary: Approximate method: M_b= —2,461 (error=10.5 percent). Exact method: M_b= —2,714.

Illustrative problem No. 2: Assume that the continuous beam in problem 1 is further subjected to yielding supports such that δ_{ab}= —0.40 in. (downward) and δ_{cb} = +0.04 in. (upward). Compute the resulting change in M_b.

Solution: Part (a): Constant I (Case 5a).
Eq. (9a): $\alpha M_a + 2(\alpha+\theta)M_b + \theta M_c = \frac{6EI_1}{\alpha L_2^2}(\delta_{ab}+\alpha\delta_{cb})$

$M_a = M_c = 0$ (No end fixity)
$2(\alpha+\theta)M_b = 4.976M_b$ (prob. 1a)
Hence: $4.976M_b =$

$$\frac{6(10{,}300{,}000)(4.5)(-0.40+2\times0.04)}{2(30)^2} =$$

$-49{,}500$
and: $M_b = -9{,}950$ in.-lb. additional mom. (Answer — Part (a))
Part (b): Varying I. (Case 5b).
Eq. (10a): $\alpha C_a M_a + (\alpha C_b + \theta C'_b) M_b + \theta C_c M_c = \frac{EI_a}{\alpha L_2^2}(\delta_{ab}+\alpha\delta_{cb})$

$M_a = M_c = 0$ (No end fixity)
$(\alpha C_b + \theta C_b')M_b = 0.302M_b$ (prob. 1b.)
Hence: $0.302M_b =$

$$\frac{10{,}300{,}000(1.8)(-0.40+2\times0.04)}{2(30)^2} =$$

$-3{,}295$
And: $M_b = -10{,}930$ in.-lb. additional mom. (Answer — Part (b))

Summary: Approximate method: M_b= 9,950 (error=10 percent). Exact method: M_b= —10,930.

Illustrative problem No. 3: Assume a continuous beam of same spans and moments of inertia as in problem 1, but loaded as in Fig. 8.

Required: Compute M_b (a) Assuming a constant I in each span equal to the arithmetic mean of the end I's, and (b) by the exact formulas, using suitable beam factors.

Solution: Part(a): Constant I. (Case 4a).
Eq.(7a): $\alpha M_a + 2(\alpha+\theta)M_b + \theta M_c = -L_2[P_1\alpha^2 n_1(1-n^2) + P_2\theta n_2(1-n_2^2)]$
$M_a = M_c = 0$ (No overhang, no end fixity)
$\alpha = 2$ (prob. 1a)
$\theta = 0.488$ (prob. 1a)
$2(\alpha+\theta)M_b = 4.976M_b$ (prob. 1a)
$P_1 = 40$ lb. $P_2 = 20$ lb.
$n_1 = 15/60 = 1/4$ $n_2 = 15/30 = 1/2$
$P_1\alpha^2 n_1(1-n_1^2) =$
$40(2)^2(.25)(1-.0625) = 37.5$
$P_2\theta n_2(1-n_2^2) =$
$20(.488)(.5)(1-.25) = 3.7$
Hence: $4.976M_b =$
$-30(37.5+3.7) = -1{,}236$
and: $M_b = -248$ in.-lb.
(Answer — Part (a))
Part (b): Varying I (Case 4b)
Eq. (8a): $\alpha C_a M_a + (\alpha C_b + \theta C'_b) M_b + \theta C_c M_c = -L_2[C'''_1 P_1\alpha^2 + C'''_2 P_2\theta]$

Since the beam structure is identical to that in problem 1, the factors in the left-hand side of this equation are identical to the analogous factors in that problem, except the values of M_a, M_b, M_c. Hence:

$M_a = M_c = 0$ (No overhang, no end fixity).
From problem 1b — $\alpha = 2$; $C_a = .080$; $C_b = .114$; $\theta = 0.16$; $C_c = .208$; $C'_b = .465$; and $(\alpha C_b + \theta C'_b)M_b = 0.302M_b$. $P_1 = 40$ and $P_2 = 20$

The beam-factors C_1''' and C_2''' cannot be obtained from the curves in Fig. 6 but must be computed by means of Eq. *(18)* in the appendix, which is derived by mathematical integration.

By Eq. (18):

$$C'''_1 = [2.3026n[0.5(\sqrt{R}+1)\log R - \frac{(A+2/n)\log(An+1)]}{A^2}$$

Wherein $A = (\sqrt{R}-1)$; $R = I_b/I_a$
To obtain C'''_1 substitute $R = I_b/I_c$ and appropriate value for n.
Factor C'''_1:
$n = 1/4$ (prob. 3a); $\sqrt{R} = 2$;
$A = (\sqrt{R}-1) = 1$; $\log(An+1) = \log(1.25) = 0.09691$.
$R = 4$ (prob. 1b); $(\sqrt{R}+1) = 3$;
$\log R = 0.60206$
$0.5(3)(0.60206) - (1+8)(0.09691) = 0.90309 - 0.87219 = 0.0390$

$$C'''_1 = \frac{2.3026(.25)(0.0309)}{(1)^2} = 0.0178$$

Factor C_2''':
$n = 1/2$ (prob. 3a); $\sqrt{R} = 0.8$;
$A = (\sqrt{R}-1) = -0.2$; $\log(An+1) = \log 0.9 = -0.04576$
$R = 0.64$ (prob. 1b); $(\sqrt{R}+1) = 1.8$;
$\log R = -0.19382$
$0.5(1.8)(-0.19382) - (-0.2+4)(-0.04576) = -0.17444 + 0.17389 = -0.00055$

$$C_2''' = \frac{2.3026(.5)(-0.00055)}{(-0.2)^3} = 0.0792$$

(From Eq. (8a) $0.302M_b = -30[0.0178(40)(2)^2 + .0792(20)(0.16)] = -93.0$
and: $M_b = -308$ in.-lb.
(Answer — Part (b))

Summary: Constant I (approx.): M_b= —248 (error=24 percent). Varying I (exact): M_b= —308.

Appendix: The curves in Fig. 6, from which the numerical values of the various continuous beam factors are obtained, represent the graphs of the following equations, which were obtained by mathematical integration:

$$\left.\begin{matrix}C_a\\C_c\end{matrix}\right\} = \frac{1.1513(\sqrt{R}+1)\log R - 2A}{A^2} \quad (13)$$

$$\left.\begin{matrix}C_b''\\C_b'\end{matrix}\right\} = \frac{(R-1) - 2.3026(\sqrt{R})\log R}{(\sqrt{R})A^2} \quad (14)$$

$$\left.\begin{matrix}C_1\\C_2\end{matrix}\right\} = \frac{A(\sqrt{R}+5) - 2.3026(2\sqrt{R}+1)\log R}{4A^4} \quad (15)$$

$$\left.\begin{matrix}C_1'\\C_2'\end{matrix}\right\} = 8 + (R-9)(\sqrt{R}) - \frac{3.4539(A^2-2)\log R}{4.5A^5} \quad (16)$$

$$\left.\begin{matrix}C_1''\\C_2''\end{matrix}\right\} = 5.4(R+0.4815) + (R-9)(\sqrt{R}) - 1.3815(4R+A)\log R/3.6A^4 \quad (17)$$

In these equations, $A=(\sqrt{R}-1)$. Use $R=I_b/I_a$ when solving for C_a—C_b—C_1—C_1'—C_1''; and $R=I_b/I_c$ when finding C_c—C_b'—C_2—C_2'—C_2''.

Not represented in Fig. 6 is the equation of the beam factor for a concentrated load placed at a distance (nL) from the outer support. This equation is:

$$\left.\begin{matrix}C_1'''\\C_2'''\end{matrix}\right\} = 2.3026n[0.5(\sqrt{R}+1)\log R - [(A+2/n)\log(An+1)]/A^2 \quad (18)$$



QUICKER KNOW-HOW

for new workers

THE KNOWN precision gauge of laminations in the solidly bonded Laminum shim makes machining unnecessary in fitting machine parts. But consider this too . . . it assures accuracy by preventing errors (sometimes spoilage) due to inexperience. Want performance data?

Laminum shims are cut to your specifications. For maintenance, however, shim materials are sold through industrial distributors.

Laminated Shim Company, Incorporated
80 Union Street • Glenbrook, Conn.

LAMINUM
TRADE MARK
THE SOLID SHIM THAT peels FOR ADJUSTMENT

STARRETT ACCURACY

Backs The B-29



This Starrett Dial Indicator is but one of the scores of Starrett Precision Measuring Tools on the job at Boeing Aircraft Company. Starrett Tools have earned the respect and confidence of those who do critically important work swiftly and with unfailing dependability.

THE L. S. STARRETT CO.

World's Greatest Toolmakers

Precision Tools . . . Dial Indicators . . . Ground Flat Stock Hacksaws . . . Metal Cutting Bandsaws . . . Steel Tapes

Now, with Two Service Stars

ATHOL, MASSACHUSETTS, U.S.A.

STARRETT

"STOCK" FORMS and SYSTEMS

For Your Bookkeeping Department, Service Department and Stock-Room

PLUS

A Complete Service for Designing and Producing . . .

- CARBON INTERLEAVED *PULLOUT FORMS
- COMMERCIAL CHECKS
- PAYROLL CHECKS AND SYSTEMS
- MODERN BUSINESS STATIONERY
- DISTINCTIVE ADVERTISING LITERATURE
- FORMS OF ALL KINDS

*Patent Applied for

ESTABLISHED  1866

The REYNOLDS & REYNOLDS Co.

DAYTON, OHIO

WORLD'S LARGEST PRODUCERS OF UNIFORM ACCOUNTING SYSTEMS FOR DEALER ORGANIZATIONS

In the event a continuous beam has a moment of inertia which varies according to the general law, $y=(ax+b)^2$, thus permitting the beam factors C_a—C_b—C_b'—C_c to be read directly from Fig. 6, but whose loading is a combination of concentrated and distributed loads, the beam factors which depend on the type of loading can be more readily determined by mechanical integration (summation).

To perform this operation the basic three-moment equation must be modified to read:

$$\left(\frac{C_aL_1}{I_a}\right)M_a+\left(\frac{C_bL_1}{I_a}+\frac{C'_bL_2}{I_c}\right)M_b+\left(\frac{C_cL_2}{I_c}\right)M_c=-\overline{C}_1-\overline{C}_2 \quad (19)$$

$$\text{or: } \alpha C_aM_a+(\alpha C_b+\theta C'_b)M_b+\theta C_cM_c=-\frac{I_a}{L_2}(\overline{C}_1+\overline{C}_2) \quad (19a)$$

$C_a - C_b - C'_b - C_c$ are obtained from Fig. 6, and:

$$\overline{C}_1=\frac{1}{L_1}\sum_A^B\frac{M_x(X)(\Delta X)}{I_x} \quad (20)$$

$$\overline{C}_2=\frac{1}{L_2}\sum_C^B\frac{M_x(X)(\Delta X)}{I_x} \quad (20a)$$

If the moment of inertia of the continuous beam does not follow the general law, $y=(ax+b)^2$, none of the beam factors can be obtained accurately from Fig. 6. However, they can be determined with reasonably close accuracy by a mechanical integration of the following formulas:

$$C_a=\frac{1}{I\overline{c}_1}\sum_A^B\frac{X(L_1-X)(\Delta X)}{I_x} \quad (21)$$

$$C_c=\frac{1}{I\overline{c}_2}\sum_C^B\frac{X(L_2-X)(\Delta X)}{I_x} \quad (21a)$$

$$C_b=\frac{1}{I\overline{c}_1}\sum_A^B\frac{X^2(\Delta X)}{I_x} \quad (22)$$

$$C'_b=\frac{1}{I\overline{c}_2}\sum_C^B\frac{X^2(\Delta X)}{I_x} \quad (22a)$$

$\left.\begin{matrix}\overline{C}_1\\ \overline{C}_2\end{matrix}\right\}$ See Eq. (20), (20a)

The application of these values requires the general theorem of three moments to be rewritten as follows:

$$C_aM_a+(C_b+C'_b)M_b+C_cM_c=-\overline{C}_1-\overline{C}_2 \quad (23)$$

Accessory Sales

(*Continued from page* 121)

The latter course is obviously the effective one to use.

It is apparent that a distributor's salesman adopting these methods will have little time for hangar flying. Indeed, unless his trips and time are carefully planned, he will have difficulty keeping his schedules. But he will find his customers intensely interested in talking about their own business, he will build sales volume, he will make loyal business friends, and *he will adequately represent the manufacturers whose products he sells.* This is the most important justification of the distributor's preferential discount.

Warehousing Function

It is the distributor's duty to carry in stock sufficient inventory to fill all of his customers' immediate requirements. While he should endeavor to obtain a maximum rate of turnover through accurate continuous inventory control, this must not be done at the expense of his suppliers. By enabling the manufacturer to ship in job lots, thereby reducing handling, shipping, and supplier's inventory costs, and distributor arms himself with the most effective answer to those proponents of air freight shipments direct from factory to retailer.

Of course the distributor must carry larger inventories than his resale outlets—his inventories must be more complete. This necessarily reduces over-all turnover due to the slow moving items, but it assures him of a reputation for service obtainable in no other way.

The low-margin high-volume staple items, often bulky, are also logically stocked by the distributor and made available to his retailers in smaller units on prompt shipments. This assures the distributor a profit through volume—and the retailer a profit because little of his money is tied up in this low margin inventory. A distributor should never lose sight of potential goodwill in a well managed "stock in trade".

Credit Function

Because the distributor's contact with dealers is necessarily closer than contact which the manufacturer could normally establish, it follows that the distributor acts to eliminate a substantial credit risk to the manufacturer. Not always does a balance sheet, a credit agency report, or another conventional credit medium on which a manufacturer must depend when selling direct, present a true credit picture.

The personal factor is entirely lacking from such media. This factor is usually no problem to the distributor, for he knows intimately his dealers' personal and business habits, his plans for the future, and the policies which govern his conduct. In short, the credit risk is placed where the best judgment can be passed on it. Such an arrangement tends to reduce to a minimum the sales opportunities which are sometimes ignored because of incorrect credit information.

Our present day aircraft accessory distributors may not measure up to all of these requirements, but should not be unduly criticized because of this. It must be remembered that old long-established industries have few resale houses that meet these requirements fully. Considering the length of time they have been operating, today's aircraft accessory distributors deserve a lot of credit for learning so much so soon. It is this same desire and effort towards self-improvement that will make them the leaders in their field and an example for other industries to follow when the war is over.

In the meantime they should receive a full measure of cooperation from the manufacturers who expect to use their services. With present day volume, this may seem to many manufacturers like putting on a complete show for a nearly-empty house. But the cooperation is needed now—not tomorrow—and those manufacturers who do cooperate now will receive their full measure of return in the volume sales of the future.

Nomographs Facilitate Layouts

(*Continued from page* 147)

upper mold points. The apparent angle is found to be 78½ deg. and the small angle ½ deg., which makes the true angle 78 deg. (to the nearest ½ deg.).

Knowing the angle at corner B-C enables us to find the angle at corner C-D from the right triangle relationship—the sum of the two acute angles is 90 deg. Applying this to corner C-D, the complementary angle of 78 deg. is 12 deg. and the figure shows that the bend is open an additional 12 deg., which makes the angle 66 deg. (90 –12 –12).

Our mold point dimensions (to the same side of the part) are:

Mold Point Dimensions	Angles
$A = 0.625$	A-B = 90 deg.
$B = 1.500 - \times$	B-C = 78 deg.
$= 1.500 - 0.32 = 1.468$	C-D = 66 deg.

$C = \sqrt{(3-3/4-0.040)^2+(3/4-\times)^2}$
$= 3.778$
$D = 0.625$

With these values we can now proceed to find the developed width; first by bend allowance, second by set-back.

By the bend allowance method, the mold-legs are subtracted from the mold point dimensions, giving the amount of material between the bends. To this we add the bend allowance, since the bend allowance is the amount of metal at the bend. From the nomographs we get the values for mold-legs and bend allowance:

Mold Point Dimensions Less Mold-Legs	
$A = 0.625' - 0.165 =$	0.460
$B = 1.468' - 0.165 - 0.101 =$	1.202
$C = 3.778' - 0.101 - 0.107 =$	3.570
$D = 0.625' - 0.107 =$	0.518
Total	5.750

Bend Allowance	
A-B	0.224
B-C	0.194
C-D	0.164
Total	0.582

By adding the two totals we have the developed width as:


$5.750 + 0.582 = 6.332$

By the set-back method, the total set-back is subtracted from the sum of the mold point dimensions. Care must be exercised to make sure that inside set-back is used where the dimension is to an inside mold point, as is the case with our example at corner B-C.

Set-Back	
A-B	= 0.106
B-C (Inside set-back)	= 0.009
C-D	= 0.050
Total	0.165

Mold Point Dimensions	
A	0.625
B	1.468
C	3.778
D	0.625
	6.496 Total
	− 0.165 (Substracting set-back)
	6.331 For the developed width

Note that by the two methods done by

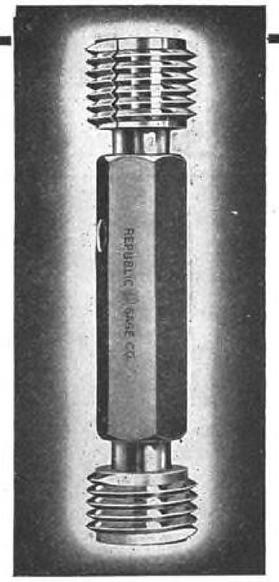

When

CHOOSING YOUR GAGE SOURCE

● Check the Accuracy

Just a pitch diameter measurement is not enough. Lead, thread angle, and pitch diameter *must* be checked to prove they are within their tolerances. Only then is a gage accurate.

● Check the Finish

The finish must be smooth, whether on a thread or plain plug. Unlapped surfaces wear off rapidly, making the gage undersize in a short time.

● Check the Steel

Only the finest tool steels are used by Republic Gage on all gages. Reports from customers have shown greater wear life from Republic gages.


● Check Source of Supply

Republic Gage's policy of making only highest quality gages, and industry's acceptance of that fact means you can rely on Republic Gage Company as your first source.

REPUBLIC GAGE CO.

2228 FENKELL AVENUE
DETROIT 21, MICHIGAN
PHONE UNiversity 1-0370

PRECISION STAMPING

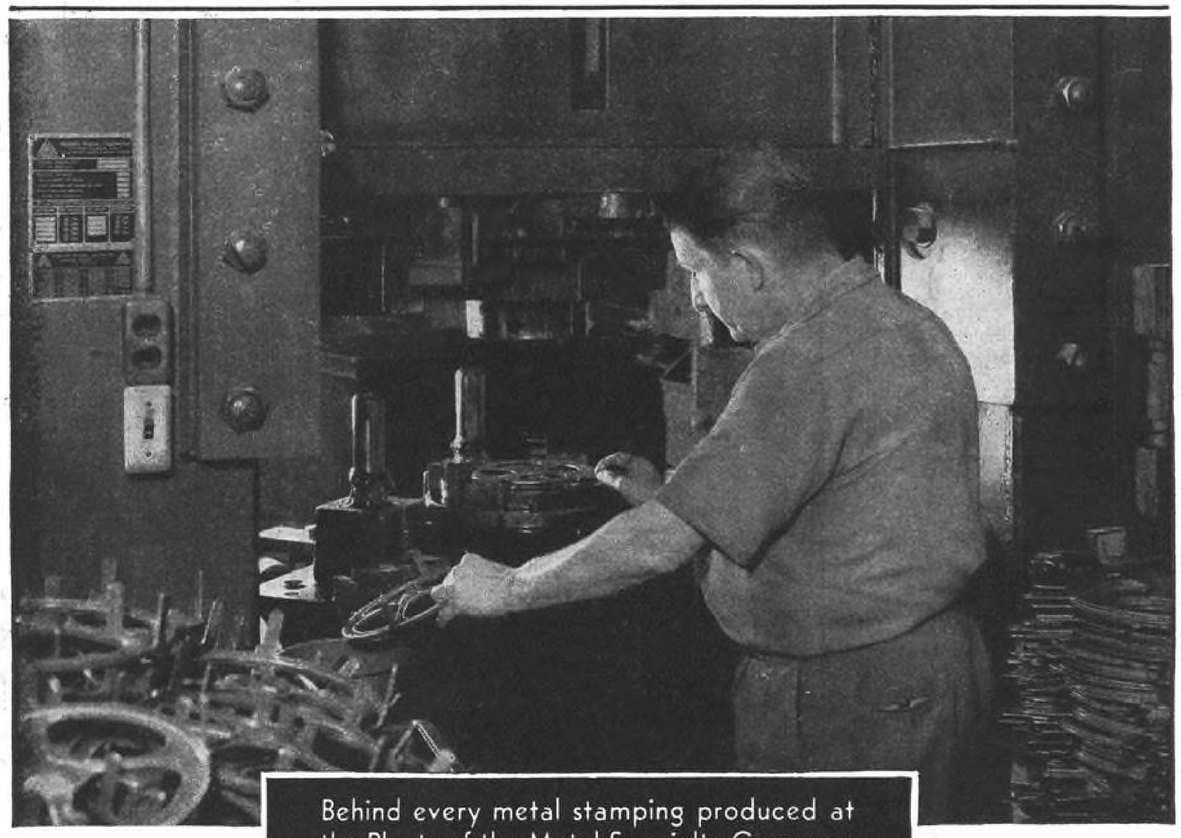


Behind every metal stamping produced at the Plants of the Metal Specialty Company is a background of years of experience. This experience combined with an Engineering and Designing Staff of the highest calibre assures you not only the finest in Metal Stamping, but an efficient and authoritative Service for your specific problems. Metal Specialty serves Industry in Stamping, Coining, Forming, Drawing, Annealing and all types of Welding. Specialists in Hydraulic Cold Drawing and Embossing on all metals, including Stainless Steel and Aluminum. Deep Drawing and Embossing up to 850 tons capacity. Shells drawn up to 20" depth.

Address inquiries on Plastic Molding to The Metal Specialty Co., Plastic Division, Cincinnati, Ohio.



Branch Plant and Sales Office — Richmond, Indiana. Sales Office—Detroit, Michigan.





The
METAL SPECIALTY *Co.*
MAIN OFFICE AND PLANT • ESTE AVENUE • CINCINNATI, OHIO



nomograph, there is only a difference of .001 in. in answers.

2. Form Blocks. Consider a form block to provide a 95 deg. bend for a part to be made up of 0.051 stock with a $\frac{1}{8}$ radius. If the spring-back is 8 deg. for the particular example, the block would be cut to 103 deg. The part's mold leg is found to be 0.261 and the block's mold leg is 0.236 (using the mold-leg chart). The difference between the two is 0.025.

Personal Plane Instruments

(*Continued from page* 123)

will get from such proposed instrumentation will not be due to his ability to fly instruments as we know it today, but rather to the aid that these instruments will give him in accomplishing flights during the extended contact weather, when smoke and haze, rather than cloud or precipitation, provide the restriction in visibility.

Instruments necessary for such flying are four in number: A compass-controlled (or "slaved") directional gyro; an airspeed indicator; an altimeter and, finally, an attitude indicator of a very graphic type, the "flying" of which is extremely instinctive.

Further details cannot be given at this time on the latter device, for reasons best known to the Army and Navy air services. It can be said, however, that during the past three months we have completed exhaustive flight tests with this instrument, whose picturization of flight attitude is so simplified that pilots who had received less than an hour's instruction in its use were flying perfectly executed loops and slow rolls under the hood.

We have taken the liberty of classifying tomorrow's light planes in three categories. We think that, first of all, there will be a basic, Cavu airplane, which will be just a "pure and simple" airplane. This ship will possess a compass, an airspeed meter, an altimeter, and nothing else, except engine instruments. It will fly locally and on short radius flights in excellent weather, and we think it will be the "Model T" of tomorrow's aviation.

The next classification is the utility airplane, a strictly functional means of transportation between airports and landing strips within a 200 or 300-mi. radius. This plane will have a compass, a directional gyro and attitude indicator, an airspeed indicator, and also a two-way radio, including a direction finder for homing.

The third class of airplane will be the ship with large tanks, equipped with all of the instruments mentioned for the utility plane, plus an automatic pilot equipped with a "slaved" directional gyro. And just to show how this latter instrumentation appears from an economic standpoint, we think that it will be bought for less than $450, complete.

In arriving at these classifications we have used the "utility" factor of each plane as the basis for our proposed instrumentation. For example, we believe that the man who customarily flies within 200 mi. of home can get along comfortably with compass-controlled directional gyro and an attitude indicator. And although we will regret its passing, we think that the traditional bank-and-turn indicator, along with the rate of climb, can be dispensed with—for the rate indicators have seen their best days.

In the specifications for the third plane—the long-range craft—you will note that an automatic pilot is included. We believe that for both the professional and the part-time pilot this instrument has proven to be a necessity, a great convenience, and certainly a tremendous factor in its contribution to the safety and enjoyment of route-flying. We think it a necessity because of the sheer relief it will afford the pilot in airways flying under postwar traffic regulations.

We know it is a great convenience in either off-or-on-airways flying on flights of any length, and its contribution to safety during doubtful weather conditions has long since been demonstrated. Further, there is every reason to believe that a dependable automatic pilot for both light and medium-weight aircraft will be available at very reasonable cost in the near future.

One of the questions that must be answered by the light plane manufacturer is whether or not the plane he builds and sells will include instrumentation installed at the factory. Will it be standard equipment, or will it be up to the customer to make these installations after he has taken delivery of his new aircraft?

It would seem much more orderly and sensible (again in terms of utility) for the manufacturer to advocate and supply instruments installed when the plane is built, so as to assure the owner's receiving the proper instruments for his purposes. There was a day when the FOB automobile arrived without spare tire, headlights, or even a self-starter, but it is my considered opinion that this stage in the development of the light plane market could well be dispensed with. Convenience (again) is so much an accepted axiom in the modern marketing of American products that a reversion to the extra accessory philosophy would do nothing but harm the light plane's progress.

The light plane manufacturer and distributor, we feel, must accept a very real responsibility when he sells the man in the street an airplane that is not to be flown by professional airmen. The laws of aerodynamics and gravity will take no holiday upon the arrival of the Air Age.

Designing our layman's plane so that the likelihood of accident is minimized is prerequisite—and sensible, graphic instrumentation with this same responsibility in mind is at least of equal importance. We must utilize every possible opportunity to keep the "Sunday airman" out of trouble, or our market will be in doubt over the years to come.

The man who makes the sale must be candid with his customers to a greater extent than has any other salesman in history. Aside from the safety considerations involved, if a man seeks an airplane for use in extended flying, he should not be sold a craft which is under-equipped in instrumentation. Just one attempt at letting down into a smoke-obscured or

FREE!

The famous 64-page, fact-packed book that has stimulated thousands of men!



"Forging Ahead in Business" is a practical, thoughtfully-written book with "punch" and common sense on every page. It carries a message of vital importance to every man who wants to make more money, get a better job and improve his station in life.

Partial Contents:

- Law of Success
- Forging a Career
- Organized Knowledge
- Highway of Achievement
- Making Decisions
- Failure and Success

Noted Contributors

Among the prominent men who have contributed to the Institute's training plan, which is described in "Forging Ahead in Business," are: Thomas J. Watson, President, International Business Machines Corp.; Clifton Slusser, Vice President, Goodyear Tire & Rubber Co.; Frederick W. Pickard, Vice President and Director, E. I. du Pont de Nemours & Co.

Simply return the coupon below, and your FREE copy of "Forging Ahead in Business" will be *mailed* to you.

MAIL COUPON TODAY

ALEXANDER HAMILTON INSTITUTE
Dept. 207, 71 W. 23rd St., New York 10, N. Y.
In Canada:
54 Wellington Street, West, Toronto 1, Ont.

Please mail me, without cost, a copy of the 64-page book—"FORGING AHEAD IN BUSINESS."

Name.....
Firm Name.....
Business Address.....
Position.....
Home Address.....

VISION for VICTORY

with a

LIBERTY AIRCRAFT MIRROR

The pilots of thousands of Allied fighter planes, now in action over our widely scattered battle fronts, are getting a perfect image of things behind them without eye-strain or fatigue, by means of Liberty Aircraft Mirrors.

Liberty Aircraft Mirrors are all first surface mirrors, and as permanent as their glass base. They give the pilot a clean, well defined image without distortion, immediately.

Each fighter plane equipped with a Liberty Mirror has a mirror built to meet the specific requirements of that plane. Thus the pilot changing from one plane to another gets uniformly good vision at all times, in all planes.

All Liberty Mirrors are now built only for War service, but later these battle tested vision devices will be available to all operators, military, transport or private.

LIBERTY MIRROR DIVISION

LIBBEY-OWENS-FORD GLASS COMPANY

BRACKENRIDGE PENNSYLVANIA

ARMY E NAVY

For continued outstanding production Liberty has been granted a renewal of the Army-Navy Production Award, entitling them to add a star to their "E" flag.

stratus-covered airport with such a plane will scare him into hangaring his airplane permanently.

There are justified reasons to believe that a good many of tomorrow's light plane owners will be expecting more from their ships than they did in prewar days. The returning military pilot, de-mobilized and back in aviation for fun and utility, will certainly not be satisfied with a Cavu airplane, usable only around the local airport. This pilot will want some real use from his purchase or rental, and if he doesn't get it, he will lose interest, and the industry will have lost a customer.

Instruments of the proper kind, sold at reasonable prices and possessing the required reliability, can do much to insure the progress of the light airplane. The airplane that is not equipped with flight instruments is handicapped at the outset with a loss of usability that can seriously thwart the purposes and hopes of its designers and builders. The distributor who sells such a ship to his customers without complete candor toward them in regard to its limitations is doing the business an injustice.

Instruments will be available for the light plane at reasonable prices and of such design that hours of practice will not be prerequisite to using them.

Review of Patents

(*Continued from page* 210)

Fuel Tank for aircraft, represented as leakproof, crashproof, and self-sealing, has non-metallic, semi-rigid, flexible inner and outer shells between which there is a thin curtain of strong, flexible material. Upon bullet penetration, curtain is caused to move so that hole in it will be out of registration with openings in shells, thus providing a seal.—2,354,701, filed June 19, 1941, patented Aug. 1, 1944, M. G. P. Pescara.

Airport Fueling System embodying main storage tank maintained at atmospheric pressure, and small emergency-use auxiliary supply maintained under air pressure, is particularly adapted for wartime use by design aimed to avoid flooding field if bombs open fuel pit outlets.—2,354,915, filed Mar. 4, 1942, patented Aug. 1, 1944, A. J. Granberg.

Tail Wheel or Skid Mount essentially comprises a wheel axle engaging at opposite ends with side plates of fork mounted in castering relation below housing provided with bracket portion into which is seated lower end of shock-absorbing telescopic strut.—2,355,210, filed Oct. 2, 1940, patented Aug. 8, 1944, E. A. Eddy, assignor to Brewster Aeronautical Corp.

Airplane Flight Indicator has reference pointer initially movable in response to means actuated directly by rudder pedal to indicate turn, and it is continued in movement by means operable in response to inertia forces acting on plane to indicate bank in indicated turn.—2,355,517, filed Mar. 3, 1941, patented Aug. 8, 1944, H. F. De Weese.

Transport Means in aircraft comprises novel lift and turntable structure incorporated for loading and unloading specially adapted armored tank. Means are provided for releasing tank by parachute.—2,356,155, filed Sept. 15, 1941, patented Aug. 22, 1944, C. G. Fogle.

Airplane Pitch Control utilizes dynamic pressure developed by airspeed of plane to set elevators, control being applied to lower elevators, and to decrease angle of climb when airspeed falls below predetermined value, also to raise elevators and increase angle of climb when airspeed rises above this value.—2,356,339, filed Aug. 10, 1940, patented Aug. 22, 1944, J. S. Morrison, assignor to L. M. Harvey.

De-Icer for supercharged aircraft carburetor provides manually or automatically controlled valve in by-pass conduit connecting discharge side of centrifugal compressor to inlet side. When valve is opened, part of air discharged by compressor is reconveyed to inlet side for recompression which supplies additional heat.—2,356,370, filed Feb. 2, 1942, patented Aug. 22, 1944, W. H. Allen, assignor to General Electric Co.

Landing Gear for aircraft embodies mounting in which frictional damping of rotational movement of plunger is limited to predetermined maximum regardless of load acting on strut, to eliminate abnormal conditions resulting from landing members being deflected from true fore-and-aft position.—2,356,468, filed Aug. 11, 1942, patented Aug. 22, 1944, S. M. Parker, assignor to Automotive Products Co., Ltd.

Automatic Steering Device has servomotor connected to controlled member by disengaging clutch so that, with manual steering, motor is not dragged and its friction need not be overcome.—2,356,597, filed Nov. 13, 1940, patented Aug. 22, 1944, A. Kronenberger, vested in Alien Property Custodian.

Special Stabilizer and Elevators for aircraft are intended to improve longitudinal (pitching) control so as to substantially avoid differences in stick forces and balancing of plane, whether in power-on or power-off condition.—2,353,907, filed Aug. 9, 1943, patented July 18, 1944, O. C. Koppen, assignor to General Aircraft Corp.

Directionally Stable Two-Control airplane is designed to be flown by direct manual operation of ailerons and elevator only, directional control being effected with aid of automatically movable rudder or rudders actuated and controlled aerodynamically.—2,353,962, filed July 28, 1943, patented July 18, 1944, O. C. Koppen, assignor to General Aircraft Corp.

Book Reviews

(*Continued from page* 210)

medium of careful analysis of factors bearing on the subject, with emphasis on labor saving, cost reduction, materials conservation, and increased productivity.

THE AVIATION DICTIONARY FOR BOYS AND GIRLS. Edited by Leslie E. Neville, Editor of AVIATION, Whittlesey House, McGraw-Hill Book Co., N. Y. C. 192 pages, illustrations by Gregorio Prestopino. $2.00.

Because of the graphic simplicity of its explanations of aeronautical terms, this dictionary, though specified for youngsters, should prove to be a handy volume for those in aviation who require brief, clear-cut definitions to give newcomers in the field. Replete with illustrations, the definitions tell "why" as well as "what." Included in the work are a section of military-plane three-views, a section explaining the various types of map projections, and a chronology of aviation history.

AIRCRAFT SHEET METAL BLUEPRINT READING, by Harry H. Coxen, B. S., M. S.; Gerald E. Jackson; and Gilbert Masters. American Technical Society, Chicago. 131 pages, blueprints, graphs, problem answers. $2.50.

Textbook on blueprint reading couched in simple, nontechnical language. Addressed chiefly to workers in aircraft plants, it will, nevertheless, be found of value by tyro technicians in any mechanical trade, particularly those who wish to learn blueprint reading without the requirement of learning how to draw the actual prints.

OPPORTUNITIES FOR YOUTH IN AIR TRANSPORTATION, by Frances Aves Smith and Nickolaus L. Engelhardt, Jr. Air Age Education Research, N. Y. C., 32 pages, illustrations. $.25.

A companion piece to "Into the Air Age," this pamphlet has been prepared for teachers, supervisors, vocational counselors and administrators in elementary and secondary schools and teachers' colleges. Broad in its approach to the subject, it outlines 13 sub-topics, each explaining vital phases of postwar aviation in which youth is expected to play a large part.

★ HELPING AMERICA PRODUCE MORE! ★






THAT'S WHAT NORMA-HOFFMANN FIELD ENGINEERS ARE DOING, TODAY


★ They're out on America's "production fronts," giving freely of their highly specialized experience, assisting manufacturers of armament, equipment, munitions and supplies in keeping production lines moving. They're aiding MACHINE BUILDERS to apply anti-friction bearings more economically and efficiently. They're helping MACHINE USERS to get the most from the bearings they have—to lengthen their life—to reduce shut-down hazards. At our factory, The Engineering and Research Departments are equally busy, solving problems in bearing application, operation and maintenance submitted by buyers of bearings in every field. And all this service is being rendered without cost, THAT AMERICA MAY PRODUCE MORE.

Write for the Catalog.
Let our engineers work with YOU.

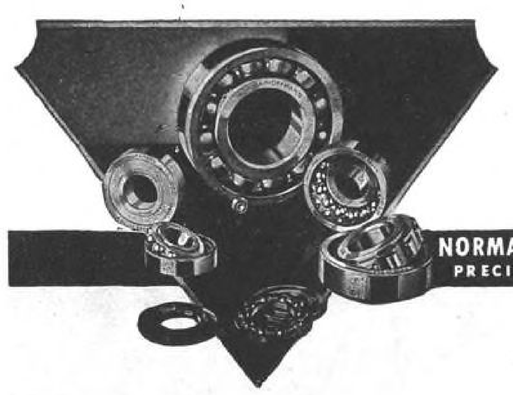

NORMA-HOFFMANN BEARINGS CORP'N., STAMFORD, CONN., U.S.A.
PRECISION BALL AND ROLLER BEARINGS — FOUNDED 1911

BUY MORE UNITED STATES WAR BONDS, TODAY

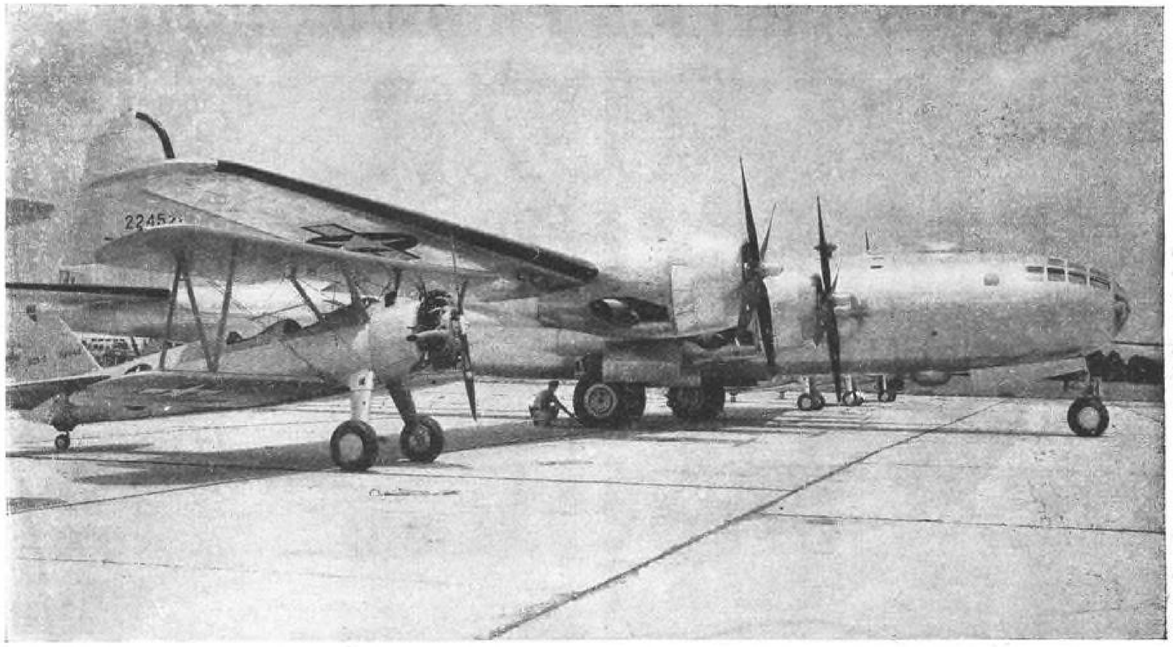

Nestled under the wing of the giant Boeing B-29 Superfortress is its tiny brother, the Boeing Kaydet Primary Trainer, famous little plane in which a majority of American Army and Navy Flyers won their wings.


Before AND After V-DAY

UNITED STATES ELECTRICAL TOOLS HELP INCREASE PRODUCTION AND CUT COSTS . . .

THIS IS BASIC . . . it's the fundamental reason for using these practical, dependable electrical tools. They're precision designed, engineered and built—brought to their present state of perfection "the hard way"—not as the product of imagination, but of actual working experience on land, sea and in the air. Put United States Electrical Tools to work for *you*. They'll step up production, improve quality, cut costs.

SPECIAL ¼" HEAVY-DUTY AVIATION DRILLS

Small but mighty

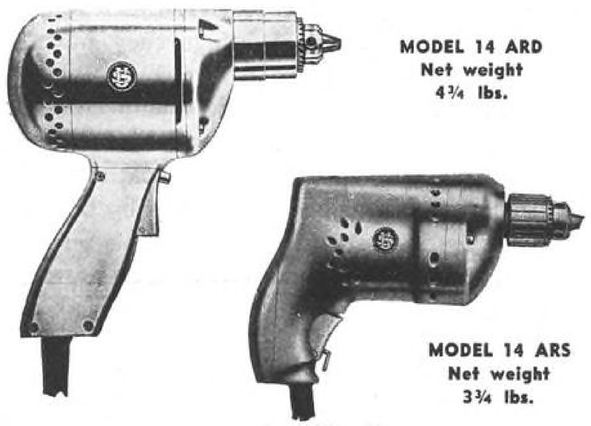

MODEL 14 ARD
Net weight
4¾ lbs.

MODEL 14 ARS
Net weight
3¾ lbs.

Ball bearing throughout. Quick make and break Switch, with locking pin in center of trigger.

Write us for delivery dates. Some models available for early deliveries.

The UNITED STATES ELECTRICAL TOOL Co.
CINCINNATI, OHIO

SERVING THE *Petroleum Needs of the Nation*



Typical Sinclair Refinery, Transportation and Distribution Units.

- SINCLAIR produces oil from more than 8000 wells located in the United States and Venezuela.
- MANUFACTURES all types of petroleum products in 10 modern refineries processing 90,000,000 barrels of crude oil annually.
- TRANSPORTS 300,000 barrels of crude oil and finished products daily through 14,000 miles of pipe lines; also employs thousands of tank cars and a large fleet of ocean tank ships.
- OPERATES a chain of waterfront terminals from the Gulf of Mexico to New England.
- DISTRIBUTES petroleum products through 2000 wholesale bulk plants which also service a network of many thousands of Sinclair Dealer stations.
- PRODUCES basic material for manufacture of synthetic rubber in one of the largest butadiene plants in the United States.

Sinclair is America's outstanding manufacturer of lubricants.


SINCLAIR AVIATION OILS

FOR FULL INFORMATION OR LUBRICATION COUNSEL WRITE SINCLAIR REFINING COMPANY, 630 FIFTH AVENUE, NEW YORK 20, N. Y.

OHMITE

Rheostats and Resistors

Foremost in Aircraft Service

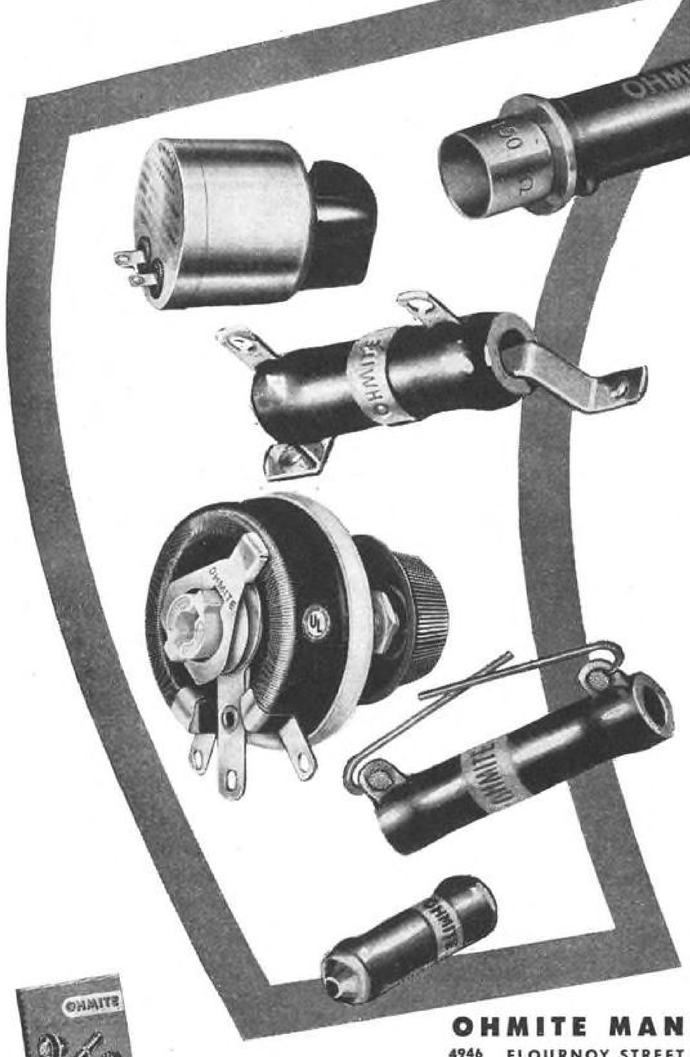

OHMITE Experience Means More Dependable Resistance-Control

As pioneers of the airways, Ohmite Units years ago flew across the seas and 'round the world in commercial air service. When war came, this experience was put to good use—for Ohmite was ready to provide tens of thousands of these dependable units for vital service in military aircraft. Today, of course, they fly and fight on every front—helping to speed Victory. This added experience is especially helpful to aircraft electrical engineers in their postwar planning. It assures rheostats and resistors of highest quality and long-service economy.



Your Answer Book to Resistance Problems

Write on company letterhead for this helpful 96-page guide in the selection and application of Rheostats, Resistors, Tap Switches, Chokes and Attenuators.

OHMITE MANUFACTURING COMPANY

4946 FLOURNOY STREET · CHICAGO 44, U. S. A.

Foremost Manufacturers of Rheostats, Resistors, Tap Switches

Be Right with OHMITE

RHEOSTATS • RESISTORS • TAP SWITCHES

GET THIS

New South Bend Lathe

CATALOG




MAILED ON REQUEST • • • WRITE TODAY FOR YOUR COPY!

SIZES AND TYPES OF SOUTH BEND LATHES

Engine Lathes — 9" to 16" swing, 3' to 12' bed length.

Toolroom Lathes — 9" to 16" swing, 3' to 8' bed length.

Precision Turret Lathes—½" and 1" maximum collet capacity.

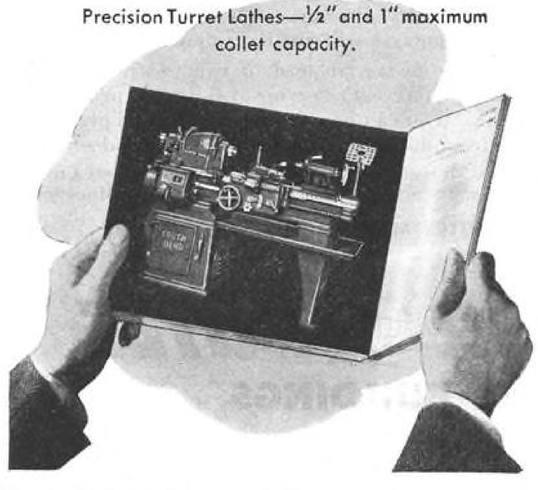

All sizes and types of South Bend Engine Lathes, Toolroom Lathes, and Precision Turret Lathes are clearly illustrated in color and described in this new catalog. Complete specifications including capacities, speeds, feeds, and weights are printed opposite the illustration of each lathe. All construction features, accessories, and attachments are also shown. Every user of machinery should have a copy of this catalog at hand for ready reference. Contains 64 pages, 11" x 8½" for standard file. Write today for your copy of Catalog 100-D.


Also, ask for details of our Post-War Priority Plan if you are now planning for the future. This will assure you prompt delivery when civilian production is resumed.

BUY WAR BONDS • SAVE FOR LATHES

SOUTH BEND LATHE WORKS

LATHE BUILDERS FOR 38 YEARS

SOUTH BEND 22, INDIANA

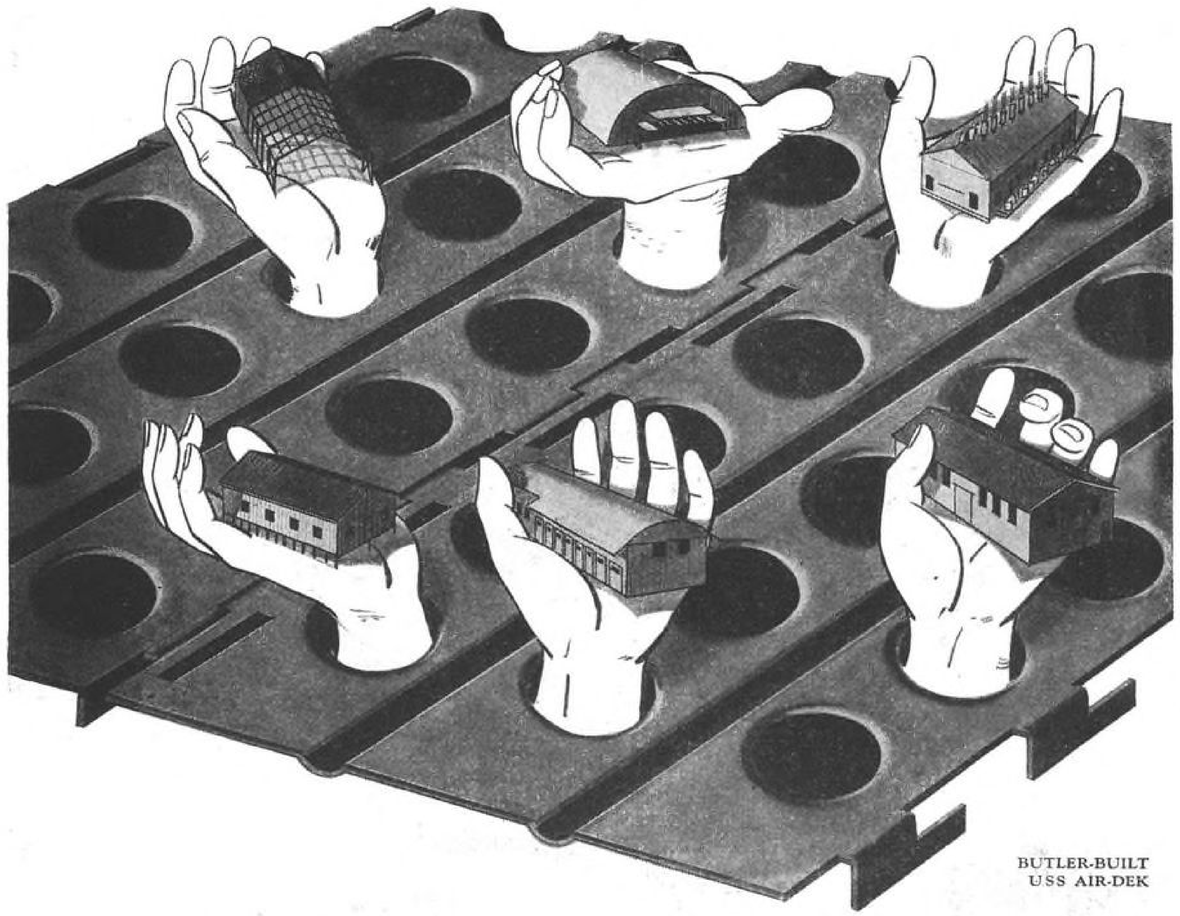

BUTLER-BUILT
USS AIR-DEK

When There Is One... Instead of Two Wars to Win

We'll Start Switching Back to Peacetime Prefabricated Steel Buildings With War Time Speed and Skill

A 40%, a 25% or even a 15% cut in our war production will make available more Butler steel buildings for peacetime needs. For instance, more than a hundred thousand tons of steel have gone into pierced steel landing mat. It is but one of the many steel items produced for war in Butler factories.

For more than 30 years prefabrication of steel buildings has never been static in Butler factories. Butler engineers have brought prefabrication through one practical stage after another. Giant strides forward have been made in war years.


From 30 years of know-how and from emergencies arising out of war, entirely new designs are emerging. Functionally they will serve each individual industry better than the thousands of prefabricated steel buildings that have gone before them.

Strength in relation to weight. Compactness of materials in shipping. Simplicity of assembly. Fire safeness. Mobility. Economy. These are some of the inherent advantages still further improved upon.

Yes, with one war instead of two to win, you can begin to tap this great reservoir of skill and specialized experience. You can benefit from time-tried prefabrication—from the performance-proved material—Steel.

Address all inquiries to: 7406 East 13th St., Kansas City 3, Missouri, or 906 Sixth Ave. S. E., Minneapolis 14, Minnesota.

BUTLER MANUFACTURING COMPANY
Galesburg, Ill. Kansas City 3, Mo. Minneapolis 14, Minn.



Awarded to Two Butler Plants

BUTLER BUILT
STEEL BUILDINGS

STEEL BUILDINGS ... TANKS (Storage, Processing and Transport) ... FILTERS ... STILLS ... DRY CLEANING EQUIPMENT
RURAL GAS SYSTEMS ... SEPTIC TANKS ... GRAIN BINS ... FARM EQUIPMENT and PRODUCTS OF OTHER METALS



A NEW CHAPTER IN AVIATION

One of several Righter models now in development is this 4-cylinder engine that will add an important chapter to modern aviation. This lightweight, highly efficient power plant is adaptable as auxiliary power for glider aircraft. Successful experiments have proven that when thermal lifts fail, retractable engines can "take it from there", eliminating hazardous landings, reducing complete dependence on air currents and adding a safety factor that is lacking in engineless gliders.

For years Righter Hi-Performance Engines have been powering small aircraft (pre-flight trainers, experimental models, target planes) and have distinguished themselves for their endurance and dependability. Their service record has rated high praise from Army and Navy training personnel.

For full information write for descriptive brochure on Righter Hi-Performance Engines

RIGHTER MANUFACTURING COMPANY
BURBANK, CALIFORNIA

Manufacturers of Light, Compact, Reliable Gasoline Engines

FOR
RECONVERSION
AND REBUILDING ALL



TYPES OF PLANES

ESTABLISHED 1929

Write for New Catalog

ENGEL AIRCRAFT SPECIALTIES

Escondido, California

One of the oldest establishments in the business

Combination N.A.C.A.—Exhaust Rings
Combination Speed—Exhaust Rings

Streamline Exhaust Rings	**Speed Rings**
Exhaust Tubes	**Cowlings**
Cabin Heaters	**Flash Boilers**
Wheel Pants	**Fairings**
Cooling Deflectors	**Exhaust Elbows**
Spinners	**Cowl Stampings**
Exhaust sections	**Nose Shutters**
Streamlines	**Armor Plating**

PLYTUBE OFFERS YOU . . .



High Mechanical Strength
Corrosion Resistance
High Dielectric Strength
Wide Variety of Sizes
Easy Workability
Low Costs

MEET INDUSTRY'S NEW LIGHTWEIGHT MATERIAL

PLYTUBE

Reg. U. S. Pat. Office

and explore its unlimited possibilities in design, fabrication and application

To know about PLYTUBE* is but a first step in a search for applications where its many unique advantages can be put to practical, effective use.

PLYTUBE is plywood tubing made by building up veneers by automatic wrapping in such a way that stress or strain in any direction acts on the total grain fibres of the total structure of the column. By varying the angle of wrap, the strength characteristics of the tube section can be determined. These angles of wrapping can be combined to produce a tube column of maximum strength.

The fact that PLYTUBE is made up of lightweight, strong material results in a tubing which, weight for weight, is capable of carrying a much heavier load than steel tubing. This outstanding feature of PLYTUBE can be taken advantage of by industry in a host of applications where it is desired to reduce weight and still maintain strength in the finished product. What many of these applications are still remain to be uncovered. Each new use suggests another. PLYTUBE's war uses have demonstrated its remarkable versatility, a fact that points to its almost unlimited future as a material of construction having characteristics of outstanding value to designers and manufacturers of products of all kinds.

Our engineers are prepared to study all possible applications and help you apply this new, lightweight tubing to meet your requirements. Use coupon below for further information.

*Manufactured under U. S. Pat. No. 2,352,533, exclusively by PLYMOLD CORP.

PLYMOLD CORPORATION
Lawrence, Mass.

PLYMOLD CORPORATION
Lawrence, Mass.


Please send me further engineering data and information about Plytube.

Name . . . . . .
Company . . . . . .
Street . . . . . .
City . . . . . State . . . . . .

HYCON

Basic 3000 p.s.i. Power Unit
Pump-Motor-Regulating Valve

To Maintain Desired System Pressure to 3000 p.s.i.

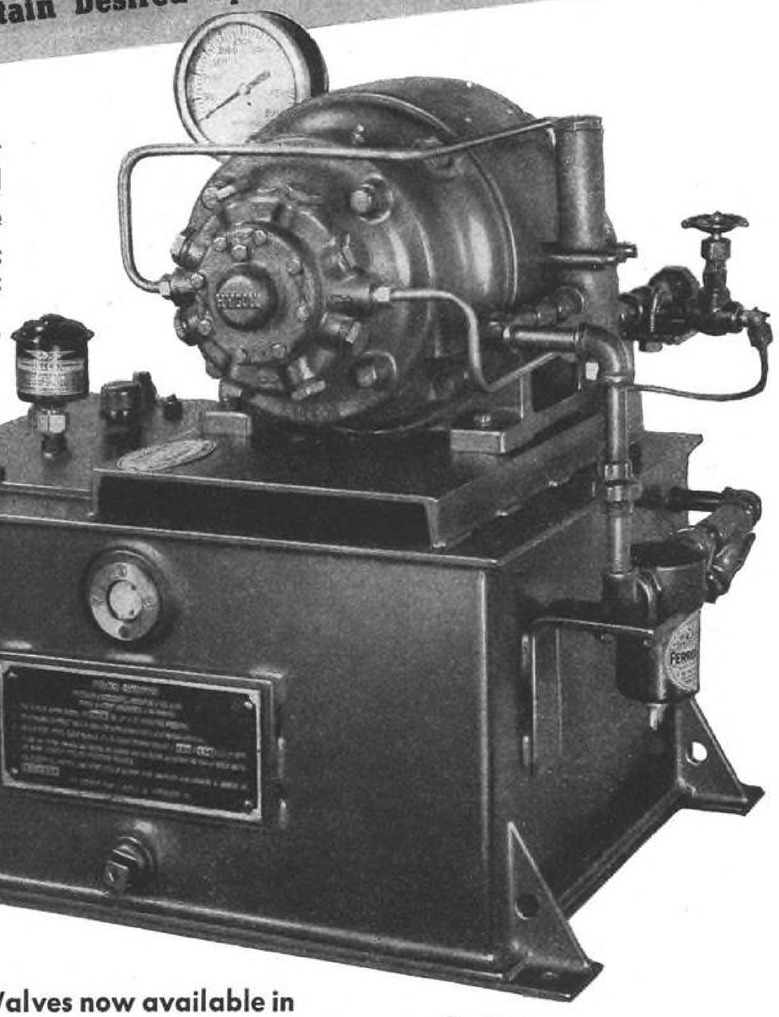

We also manufacture a complete line of regulating and operating valves which can be mounted integrally with Basic Unit to provide any method of straight line power actuation.

Pumps and Valves now available in capacities of .5—1—2.25 GPM for continuous 3000 p.s.i. operation


Courtesy—
Weinman Pump & Supply Company
Pittsburgh, Pennsylvania


THE NEW YORK AIR BRAKE COMPANY

Hydraulic Division


420 LEXINGTON AVENUE, NEW YORK 17, N. Y. · FACTORIES: WATERTOWN, N. Y.

You can LUBRICATE *ONE* MACHINE OR A *BATTERY* OF MACHINES *with the* LINCOLN CENTRO-MATIC LUBRICATING SYSTEM

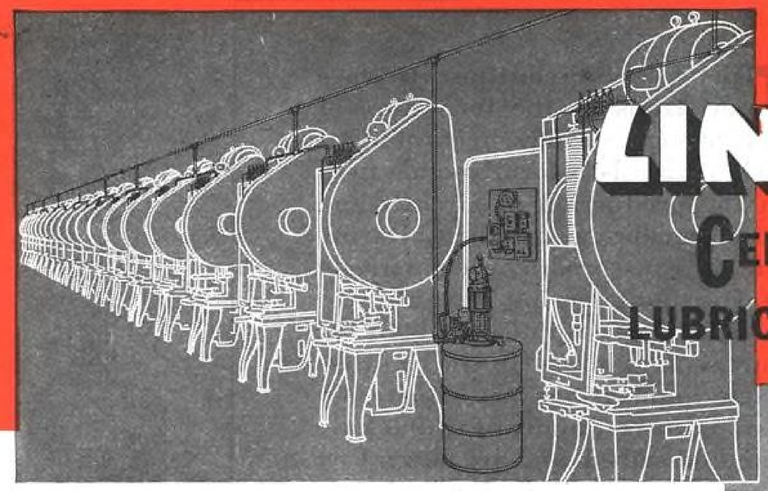

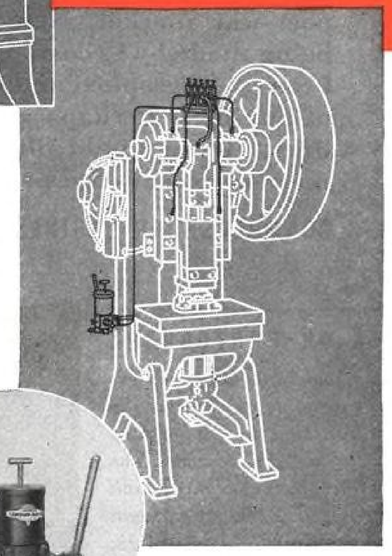

The schematic drawings, above and at right, show the flexibility and ease of installing a Lincoln Centro-Matic System on one machine or a number of machines. No alterations are necessary in the orginal machines... Only one lubricant supply line is required... Injectors can be mounted singly or in manifold... Flexible feeder lines can be used on bearings located on moving parts of machine... A single lubricant pump can supply one machine or a battery of machines... Pump can be either hand operated, time-clock controlled or push-button controlled.



Save

BEARINGS · MACHINE HOURS · MAN HOURS · POWER · and Prevent Accidents

ENGINEERING SERVICE

The Lincoln Engineering Company has a trained staff of thoroughly experienced engineers who are ready to assist you with any problems you may have pertaining to the lubrication of machines and equipment—Just send us a sketch of the machine, or machines to be lubricated and our engineers will gladly submit a detailed report as to the type of Centro-Matic System required to do the job.



Send for Bulletins Today

Complete, descriptive literature on Centro-Matic Lubricating Systems is available. Mail coupon below and your copies will be mailed immediately.

ARMY E NAVY

LINCOLN ENGINEERING COMPANY

Pioneer Builders of Engineered Lubricating Equipment

5701 NATURAL BRIDGE AVE., ST. LOUIS 20, MO., U. S. A.

I WOULD LIKE TO HAVE FREE BULLETINS
On Lincoln Centro-Matic Lubricating Systems

Name _____
Title _____
Company _____
Address _____
City _____ *State* _____

A 144-15

CHAMBERSBURG CECOSTAMP




THE Cecostamp continues to blaze new trails in the formation of the tough, springy sheets of light-weight, hard-to-form metals used in the production of aircraft and other modern equipment. Having the ability to produce even intricate shapes in sheet metal without tearing, wrinkling or stretching, the Cecostamp opens up new fields in the formation of sheet metal parts for use in the limitless post-war market. New applications are constantly being made by Cecostamp users, many of which have been photographed and described, and are now a part of our files. Perhaps you are working along similar lines. If you would like to see some recent developments, please write us.

CHAMBERSBURG ENGINEERING CO. • CHAMBERSBURG, PA.



DATA ON PHOTOGRAPH

This photograph shows an excellent example of multiple die work, utilizing the full bed area of a 48" x 48" Cecostamp. The die is accurately balanced; and the part, a 24SO Aluminum fairing, is made in two blows. The first blow is a hard one that forms the part without wrinkles. The second blow is a lighter one to combat any effects from air pressure confined in the trapped die. With this dual-impression die, the Cecostamp is actually forming one part per blow. Incidentally, this particular Cecostamp die has eliminated the necessity for a skilled operator and the need for rubber pads in forming this part.

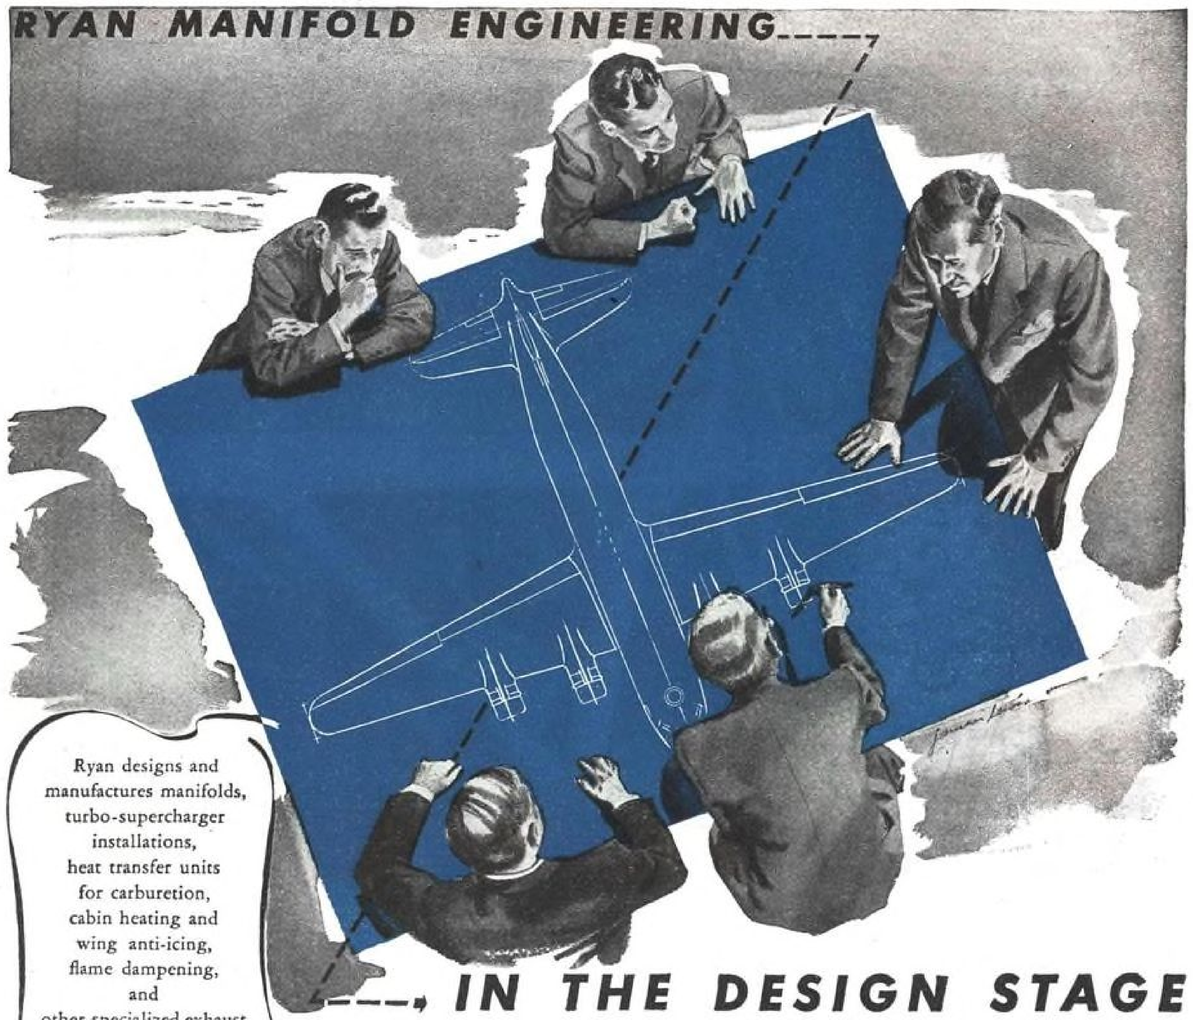


Ryan designs and manufactures manifolds, turbo-supercharger installations, heat transfer units for carburetion, cabin heating and wing anti-icing, flame dampening, and other specialized exhaust system applications.

----, IN THE DESIGN STAGE

means lower weight, better performance

To plan the exhaust manifold system when the original design for the airplane is being made saves costly engineering time, brings reduction in weight, and results in better performance. In a typical instance a Ryan manifold design saved forty-eight pounds in the weight of a military transport plane.

By planning with Ryan during the design stage, the type of manifold system and installation best suited to your specific requirements can be readily ascertained.

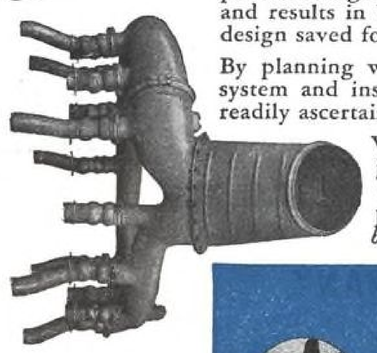

Whether planning to use Ryan ball and socket type or slip-joint type manifolds, let Ryan work with you in the *design* stage. You will obtain a superior product and maximum performance, and, in wartime, *lower weight;* in peacetime, *bigger payload.*


RYAN

RELY ON RYAN TO BUILD WELL 1922-1944

Ryan Aeronautical Company, San Diego — Member, Aircraft War Production Council, Inc.
Eastern Office — 420 Lexington Avenue — New York 17, New York

DESIGNERS AND BUILDERS OF COMBATANT TYPE AIRPLANES AND EXHAUST MANIFOLD SYSTEMS

THE LADY AND THE TIGER

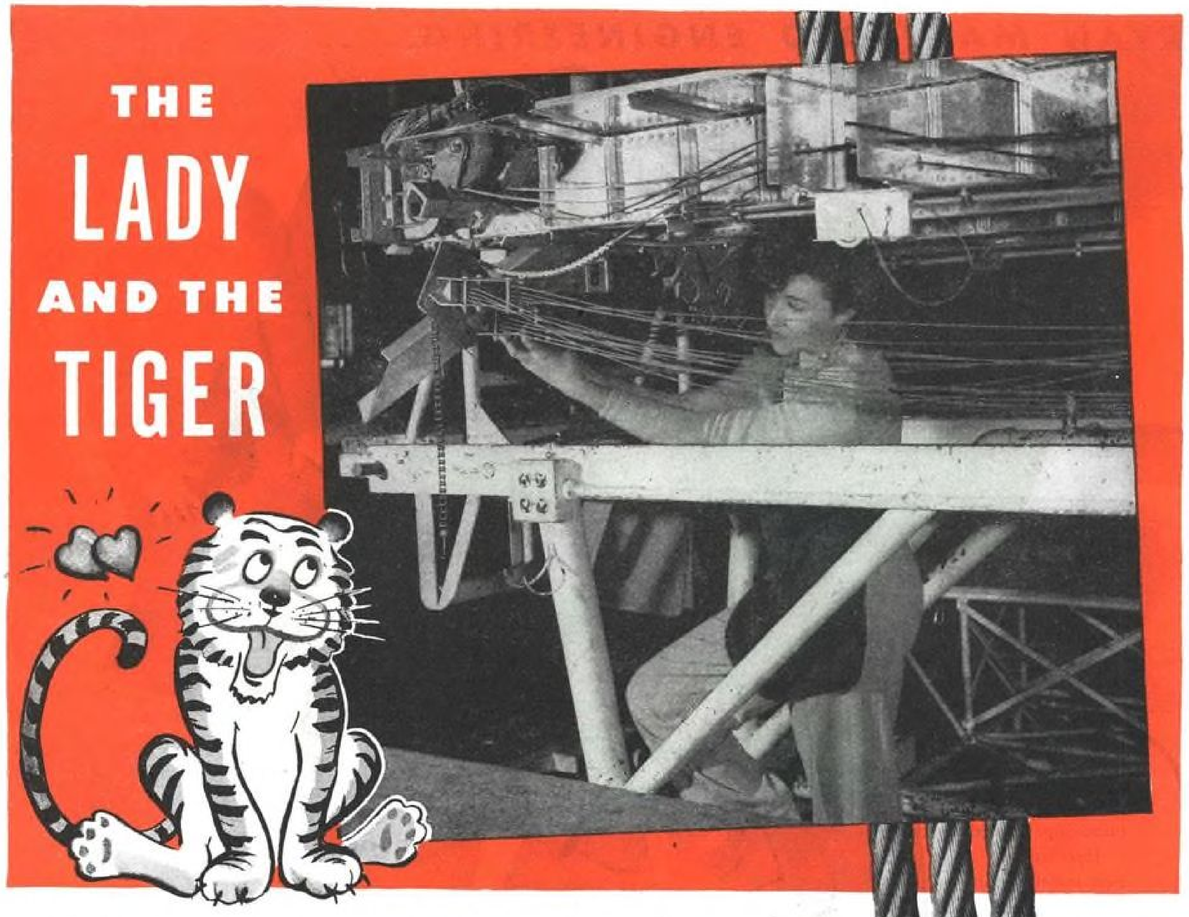

TODAY in airframe assembly plants all over the country, patriotic women, who have laid away their kitchen aprons to engage in the serious business of winning the war, are skillfully installing the strong steel nerves that control America's finest fighting planes.

In our aircraft cable plants, too, women are helping produce American TIGER BRAND Control Cables. Here, under the guidance of men who have spent years mastering specialized operations, their nimble fingers have been trained to meet the exacting demands of delicate and intricate jobs. To these ladies we owe our record for holding quality of production consistently at highest levels.

The high-quality American TIGER BRAND Control Cables we offer for your use combine ample strength to handle maximum loads with lightness, minimum stretch, excellent flexibility and superior resistance to fatigue, wear and corrosion. Flawless performance is assured by their Excellay Preformed construction — in which individual wires and strands are helically preformed to the exact shape they will assume in the finished cable.

AMERICAN STEEL & WIRE COMPANY
Cleveland, Chicago and New York
COLUMBIA STEEL COMPANY
San Francisco
United States Steel Export Company, New York

AMERICAN *Tiger Brand* CONTROL CABLES

USS

UNITED STATES STEEL

The CONE AUTOMATIC MACHINE COMPANY *sees many* GOOD THINGS AHEAD

It is reported that . . . . . .

A recent survey shows that 89% of the tire and rubber companies and 86% of the paper companies will have new products to offer after the war. 58% of all manufacturers questioned have something entirely new for post-war customers.

get ready with CONE for tomorrow

A new heat-treated glass is in production that resists thermal shock and temperatures to 650° F.

get ready with CONE for tomorrow

One of the large tire manufacturers has just patented a tubeless, uninflated automobile tire.

get ready with CONE for tomorrow*

Bimetallic cylinders for internal combustion engines, in which a copper sleeve is bonded to a cast iron cylinder, promise to lessen greatly the problem of heat transfer that has always interfered with high performance.

get ready with CONE for tomorrow

Indium, once worth $20,000 an ounce, now costs $7.50.

get ready with CONE for tomorrow

A plant has just been opened to rebuild completely automobiles by the production line method to new car standards.

get ready with CONE for tomorrow

Aircraft engineers imagine that the big airlines of the future will dispense with landing gear entirely and will be electronically guided into a wheeled cradle at each landing field.

get ready with CONE for tomorrow

The same type of mechanism now used to stabilize the guns of moving tanks could be used to provide smoother riding trains.

get ready with CONE for tomorrow

Foam rubber is expected to replace familiar upholstery construction in automobile seats, saving nearly a foot in the length of the body.

get ready with CONE for tomorrow

One big national picture magazine plans to print entirely in full color after the war.

Factory roofs actually supported solely by air blast from ventilating fans are in use and are the subject of serious experiment.

get ready with CONE for tomorrow

Snap-on molded rubber covers are now being used to mask those parts of electro-plated objects which must remain bare.

get ready with CONE for tomorrow

San Francisco has a plan for a 25 million dollar "World Trade Center" covering twelve blocks of its water front and including a free trade zone.

get ready with CONE for tomorrow

Glass jewels, for instrument bearings, can now be turned out automatically at the rate of 3,500 per day. They are preferable in some respects to natural sapphires.

Through careful research and improvement, one familiar office machine has had 94 per cent of its noise eliminated or absorbed.

get ready with CONE for tomorrow

Electrically conductive rubber is being used to heat aircraft guns and propellers.

get ready with CONE for tomorrow

By the use of a resin extracted from Southern pine, foundries have been able to reclaim old sand and reduce their consumption of new sand as much as 75 per cent.

get ready with CONE for tomorrow

A new filtering material, made of pure rubber latex, has as many as 6,400 holes to the square inch.


get ready with CONE for tomorrow

A new adhesive bonds wood to metal, making possible a new product consisting of a 1/48" ply of wood combined with a thin layer of sheet steel. This material can be readily cut and bent, and is decorative, durable, and fireproof.

Automatic Production at automatic-cannon speed



The 1⅝" 8-Spindle Conomatic produces these 20mm. tracer bullets in 8 seconds each. Production like this keeps shell supplies ahead of the requirements of rapid firing guns. Conomatics, in wartime, are a military necessity — in peacetime, an economic necessity.



CONE

AUTOMATIC MACHINE CO., INC. ★ WINDSOR, VERMONT, U. S. A.

11

An aileron control
is a relatively small part
of an airplane...yet
think how important it is
to the flight of
that airplane.

Piston rings are relatively
small, too, but not small in importance
to aircraft engine manufacturers.



The world's finest piston rings are standard equipment for these world-famous aircraft engines — Allison • Wright • Studebaker-built Wright • Buick-built Pratt & Whitney • Warner • Packard-built Rolls-Royce • Franklin

Hagerstown, Ind. New Castle, Ind. Richmond, Ind. Tipton, Ind.

"For Excellence in Piston Ring Production"

The Perfect Circle Companies

Hagerstown, Indiana • Richmond, Indiana • New Castle, Indiana • Tipton, Indiana • Toronto, Ontario, Canada

Ready...

Ready indeed is this soldier of the skies equipped with his **SAFE-T-CHUTE**. And ready also is our Company to keep pace, not only with the needs of those who fly, but with the development of other types of safety equipment. ☆ ☆ ☆ ☆ Today we're making **SAFE-T-CHUTES** for the paratroop and combat flyers... but when Victory has been won we shall turn our resources to the manufacture of any form of **SAFE-T-PRODUCT** for which our broad experience has equipped us. At this time we invite inquiries from those who have a problem of designing or developing safety equipment in the apparel or kindred lines. ☆ ☆ ☆ ☆ Our engineering staff is available for consultation and we are prepared to plan, advise or manufacture.

NEW educational air-safety film available for colleges—training schools—high schools.

ALSO write for the informative Switlik Parachute Chart and new manual. All free for the asking.

© 1944, Switlik Parachute Co.




SWITLIK
SAFE-T-CHUTES

THE MORE BONDS YOU BUY
THE MORE HOURS THEY FLY

SWITLIK PARACHUTE COMPANY
Dept. A-11, TRENTON 7, NEW JERSEY

U.S. Army Air Force Photo

...a new tool of incredible speed and versatility...

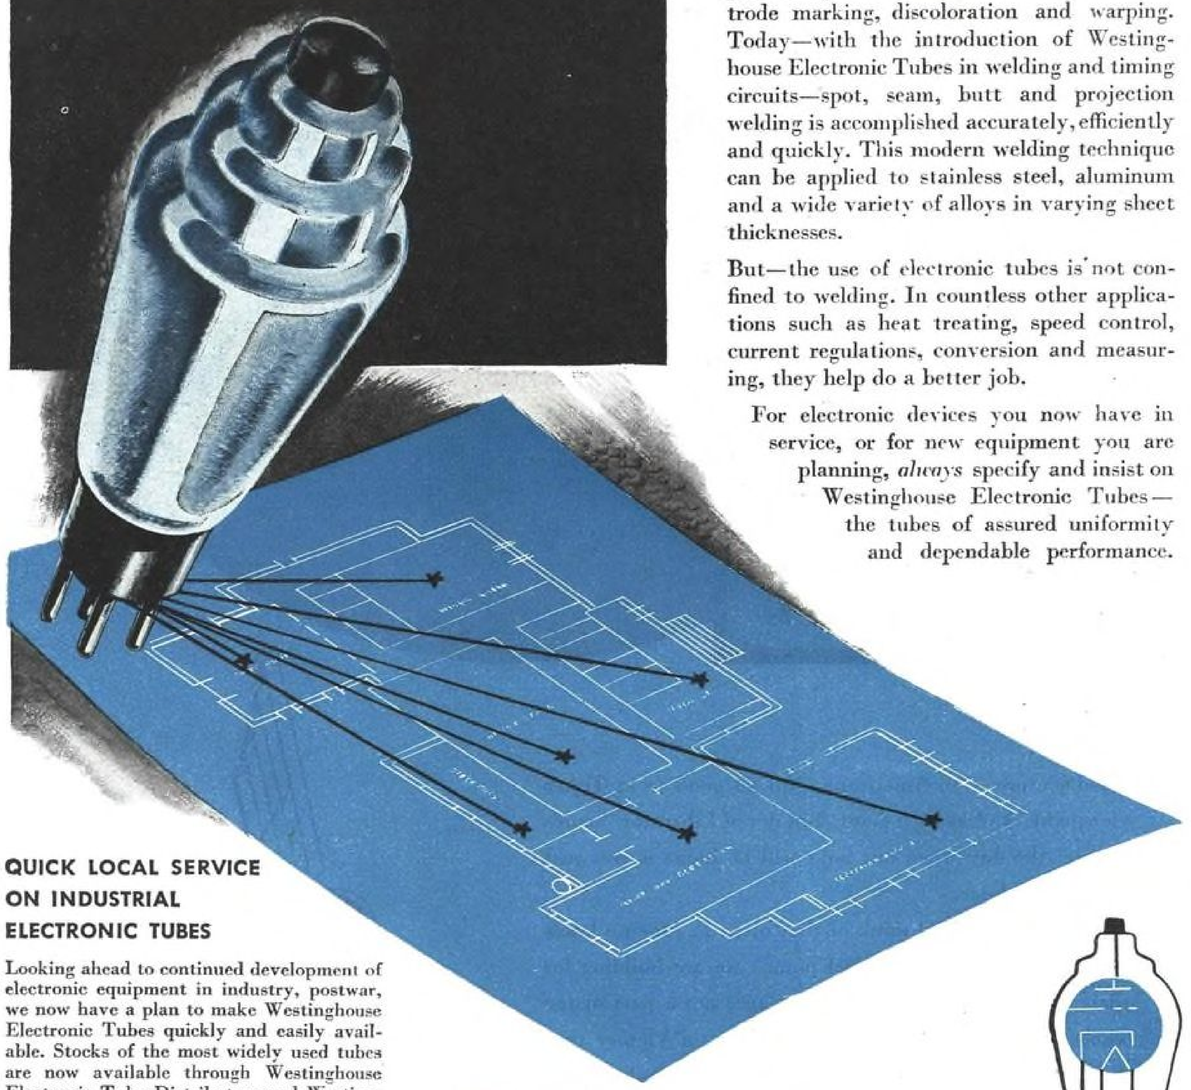

The electronic tube may easily prove to be one of your most useful tools when you are confronted with reconversion headaches. Electronic tubes have proved that they save money in innumerable operations by increased speed and accuracy.

Take welding for example. For years resistance welding was limited to steel fabrication, permitting a considerable tolerance for electrode marking, discoloration and warping. Today—with the introduction of Westinghouse Electronic Tubes in welding and timing circuits—spot, seam, butt and projection welding is accomplished accurately, efficiently and quickly. This modern welding technique can be applied to stainless steel, aluminum and a wide variety of alloys in varying sheet thicknesses.

But—the use of electronic tubes is not confined to welding. In countless other applications such as heat treating, speed control, current regulations, conversion and measuring, they help do a better job.

For electronic devices you now have in service, or for new equipment you are planning, *always* specify and insist on Westinghouse Electronic Tubes—the tubes of assured uniformity and dependable performance.

QUICK LOCAL SERVICE ON INDUSTRIAL ELECTRONIC TUBES

Looking ahead to continued development of electronic equipment in industry, postwar, we now have a plan to make Westinghouse Electronic Tubes quickly and easily available. Stocks of the most widely used tubes are now available through Westinghouse Electronic Tube Distributors and Westinghouse District Warehouses. As rapidly as possible additional types will be added to local stocks to make a complete line of Quality Controlled Westinghouse Electronic Tubes available to everyone.



Westinghouse
PLANTS IN 25 CITIES OFFICES EVERYWHERE

Quality Controlled Electronic Tubes

WESTINGHOUSE PRESENTS John Charles Thomas • Sunday 2:30 EWT., N.B.C. ★ Ted Malone • Monday, Wednesday, Friday—10:15 EWT—Blue Network.



Plumping a bomb squarely amidships on a Jap oil barge off the coast of New Ireland, a U. S. Navy Consolidated LIBERATOR also brings back dramatic photographic proof of its "strike." Official U. S. Navy Photograph.

BULL'S-EYE

Good picture — to Americans. Not so good from Tojo's viewpoint. And as each giant, 4-motored Liberator "scores again," the day when our boys will be home moves just that much closer.

We here at CECO think of that often . . . for we know that the carburetors and fuel pumps we are building for these great Liberators and other planes are a part of the whole tremendous pattern of Victory . . . a Victory that American boys are assuring by their unparalleled courage and skill.

We look forward to more pictures like the one above.

CECO

CARBURETORS

FUEL PUMPS

PROTEK-PLUGS


CHANDLER-EVANS CORPORATION SOUTH MERIDEN CONNECTICUT, U. S. A.

Dependable *all around duty assured with* Simmonds Push-Pull Controls




FIRST TO CARRY THE YELLOW DOT


of Army Air Force Winterization acceptance for operation in extreme temperatures is the Simmonds-Corsey Push-Pull Control. Comprehensive tests with temperatures as low as minus 72°F. and as high as 160°F. prove efficient operation under wide variety of conditions.

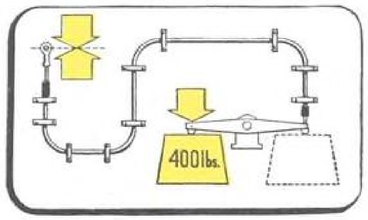


STATIC STRENGTH: *In this test Simmonds push-pull control successfully withstands tensile and compressive forces of 400 lbs. Credit simplification of design, improved linkage.*

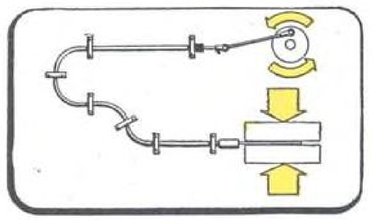


ENDURANCE: *Cycled 30,000 times under stress, as illustrated, Simmonds controls are not affected in any way, and can be expected to outlast the life of unit served.*

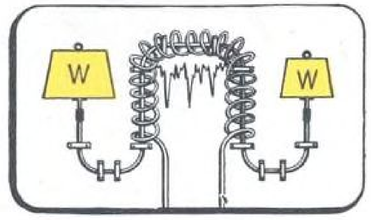


EFFICIENCY: *Input-output ratio of control is measured at various temperatures in insulated chamber. Result: average efficiencies are twice the AAF requirements.*

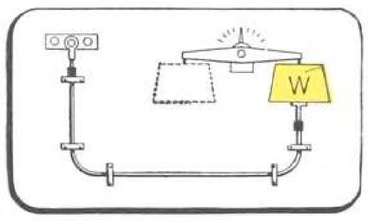

PRECISION CONTROL: *Motion between tension and compression is negligible. Before endurance test: average—.046"; after—.082". Simmonds are precision-built controls.*

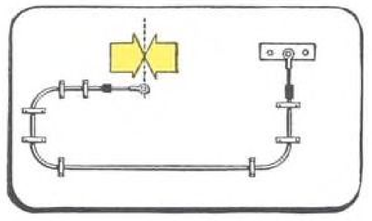

DEFORMATION: *AAF specifications call for loads ranging from 10 to 50 lbs. Allowable average deformation is .140". Simmonds controls average only .083".*

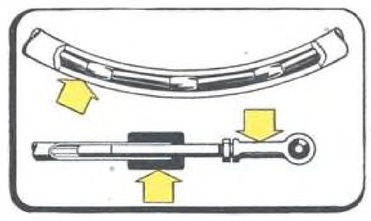

CORROSION: *Simmonds controls meet AAF specifications for corrosion resistance with standard cadmium plated or anodized surfaces. Tube ends are rubber sealed.*

INQUIRIES concerning War Contracts or Post-War problems involving push-pull control equipment are invited. Our service engineers will furnish you gladly with analyses and recommendations. Telephone or write to your nearest Simmonds office.

SIMMONDS EQUIPMENT FLIES WITH EVERY TYPE OF ALLIED AIRCRAFT

Automatic Engine Controls — Push-Pull Controls — Spark Plugs
Hydraulic Accumulators — Hydraulic Fuses — Chronometric Radiosondes
Self-Aligning Rod-End Bearings — Fasteners and Clips of Specialized Design


30 Rockefeller Plaza,

SIMMONDS AEROCESSORIES INC.

New York 20, New York

Branch Offices: Dayton • Washington • Hollywood • Montreal

Manufacturing Plants: New York • Vermont • California

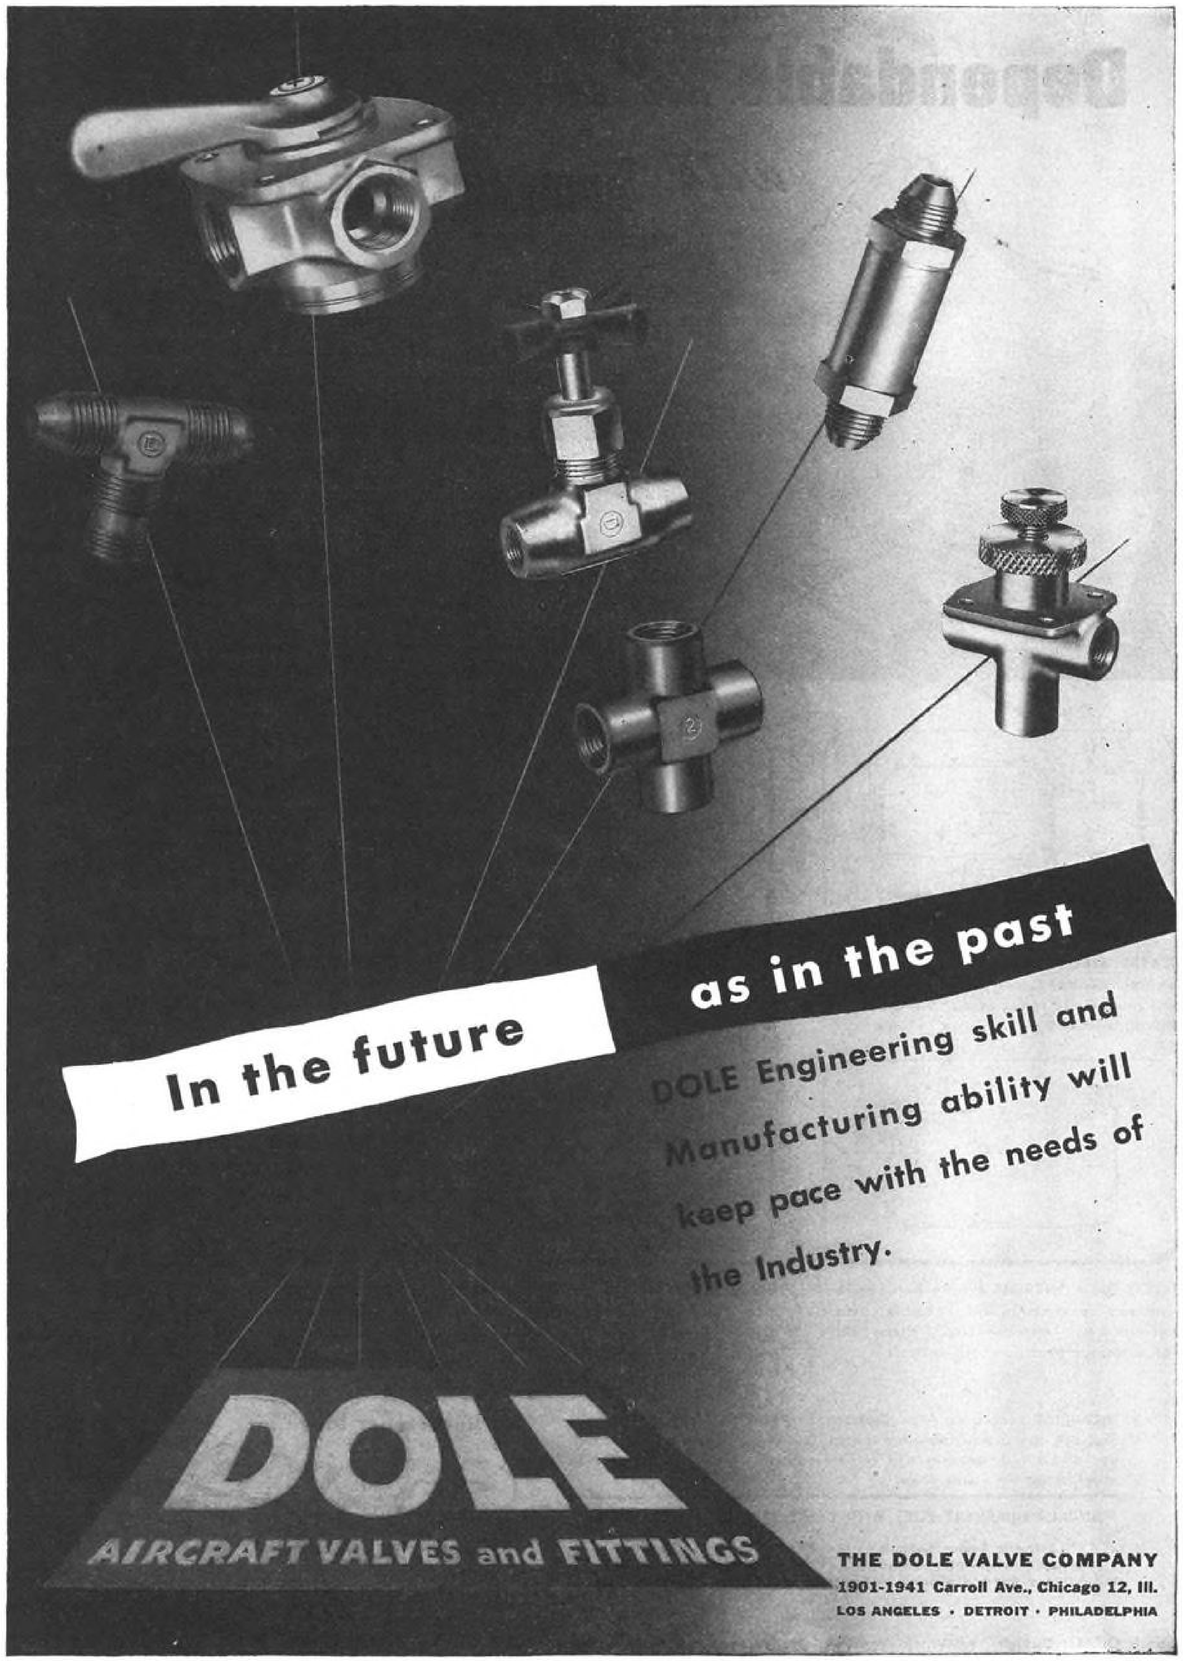

In the future as in the past


DOLE Engineering skill and Manufacturing ability will keep pace with the needs of the Industry.

DOLE

AIRCRAFT VALVES and FITTINGS

THE DOLE VALVE COMPANY
1901-1941 Carroll Ave., Chicago 12, Ill.
LOS ANGELES · DETROIT · PHILADELPHIA

This Book Tells 3 Ways Your Product May Be Improved with Silentbloc

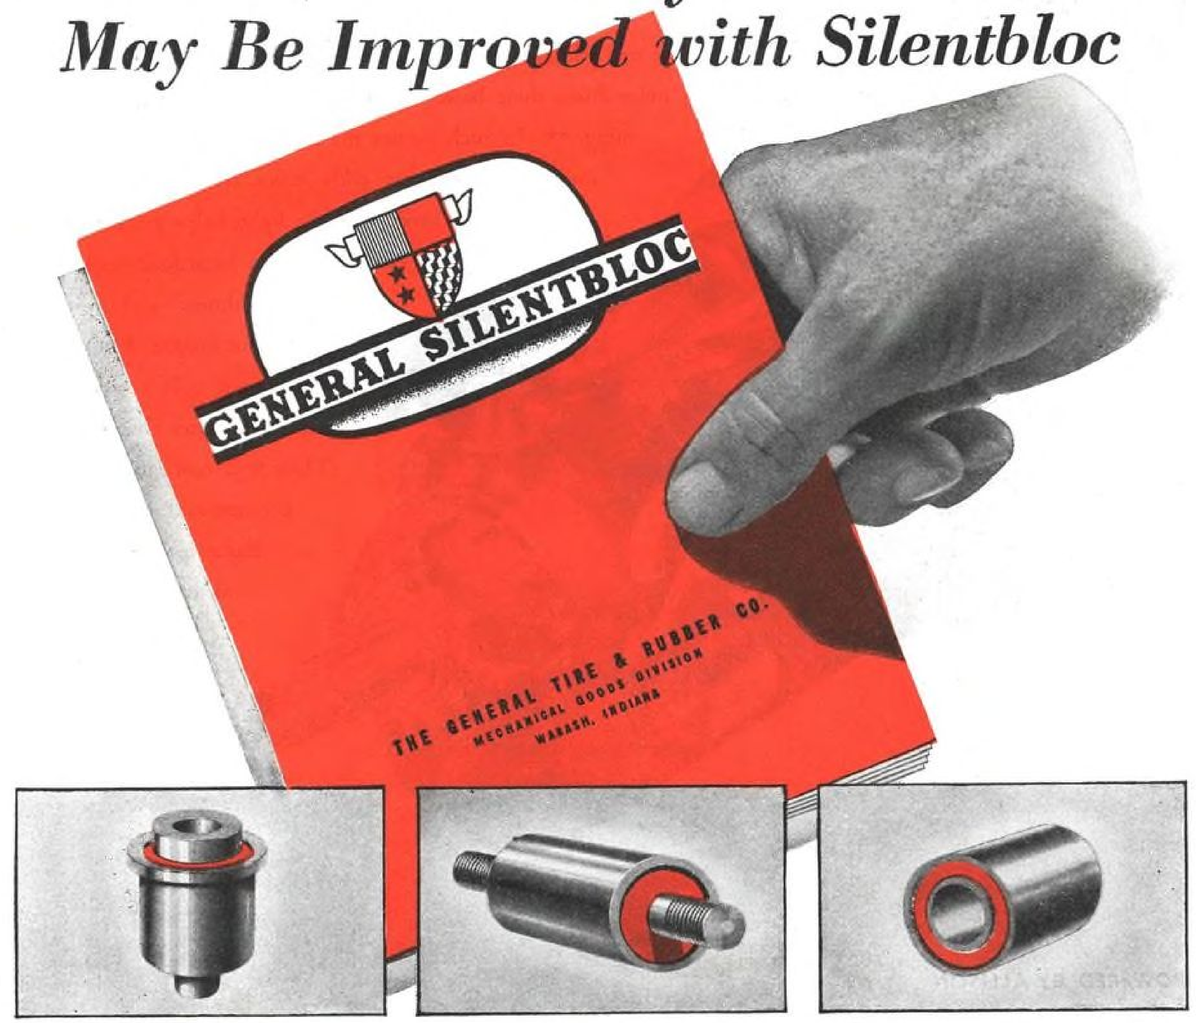

SILENTBLOC
Controls Vibration and Absorbs Shock Loads

General Silentbloc rubber mountings damp or isolate vibration, cushion shock loads and absorb noise in motors and moving equipment. Silentbloc is not just "a piece of rubber." It is an engineered mounting, made of any metal and rubber, designed to give predictable performance with specified rate of deflection in any plane. Its better control of vibration and shock load may enable you to lighten your product, step up efficiency and lengthen life.

SILENTBLOC
Gives Torque Action Without Lubrication

If your product has oscillating parts, you may make a radical improvement with General Silentbloc rubber torque bearings. Silentbloc construction gives indestructible rubber-to-metal union—no chemical bond—can't slip. Needs no lubrication; unharmed by dust. General engineers can design a Silentbloc bearing for your specific needs, with controlled amplitude, using any metal and rubber. Eliminating lubricated bearing may cut your production cost.

SILENTBLOC
Corrects for Misalignment in Bearings and Shafts

General Silentbloc bushings are used to correct for misalignment in needle or ball bearings in a series, in long shaft supports and in hinges. Loading and stress caused by misalignment are taken up by the resilient rubber between metal sleeves. Silentbloc bushings offer a double advantage: 1. Protection against wear and damage. 2. Saving on machining and fitting to close tolerances. Bushings can be made of any metal and any rubber, including oil-resistant synthetics.

The GENERAL SILENTBLOC
MOUNTINGS . . . BEARINGS
COUPLINGS

Write for Booklet showing details of patented Silentbloc construction—outer metal sleeve into which rubber ring is compressed and inner sleeve or shaft "shot" through rubber. Radial compressive force of elongated rubber forms indestructible rubber-to-metal union. Address The General Tire & Rubber Company, Dept. 84, Wabash, Indiana.

THE GENERAL TIRE & RUBBER CO.
Mechanical Goods Division, Wabash, Indiana

TO FIGHT THERE AND BACK



In this war pilots often fight far over enemy territory, hundreds of miles from their base. So fighter planes need range as well as sting. ★ In such sorties the Allison engine has proved its mettle. Its economy adds miles to every tankful. Its dependability keeps it in the fight, helps get both plane and pilot back from hazardous encounters. Its smoothness and response lessen pilot fatigue. ★ Qualities like these will continue in importance after the war's end. They will contribute to the comfort and safety of your flights in the days of great air transport to come.

POWERED BY ALLISON
P-38—Lightning
P-39—Airacobra
P-40—Warhawk
A-36 and P-51—Mustang
P-63—Kingcobra

More than 60,000 Allison engines have been built for the above planes of the U. S. Army Air Forces.


LIQUID-COOLED AIRCRAFT ENGINES

Allison ★
DIVISION OF
Indianapolis, Indiana

GM
GENERAL MOTORS

Every Sunday Afternoon
GENERAL MOTORS SYMPHONY OF THE AIR — *NBC Network*


KEEP AMERICA STRONG
BUY MORE WAR BONDS

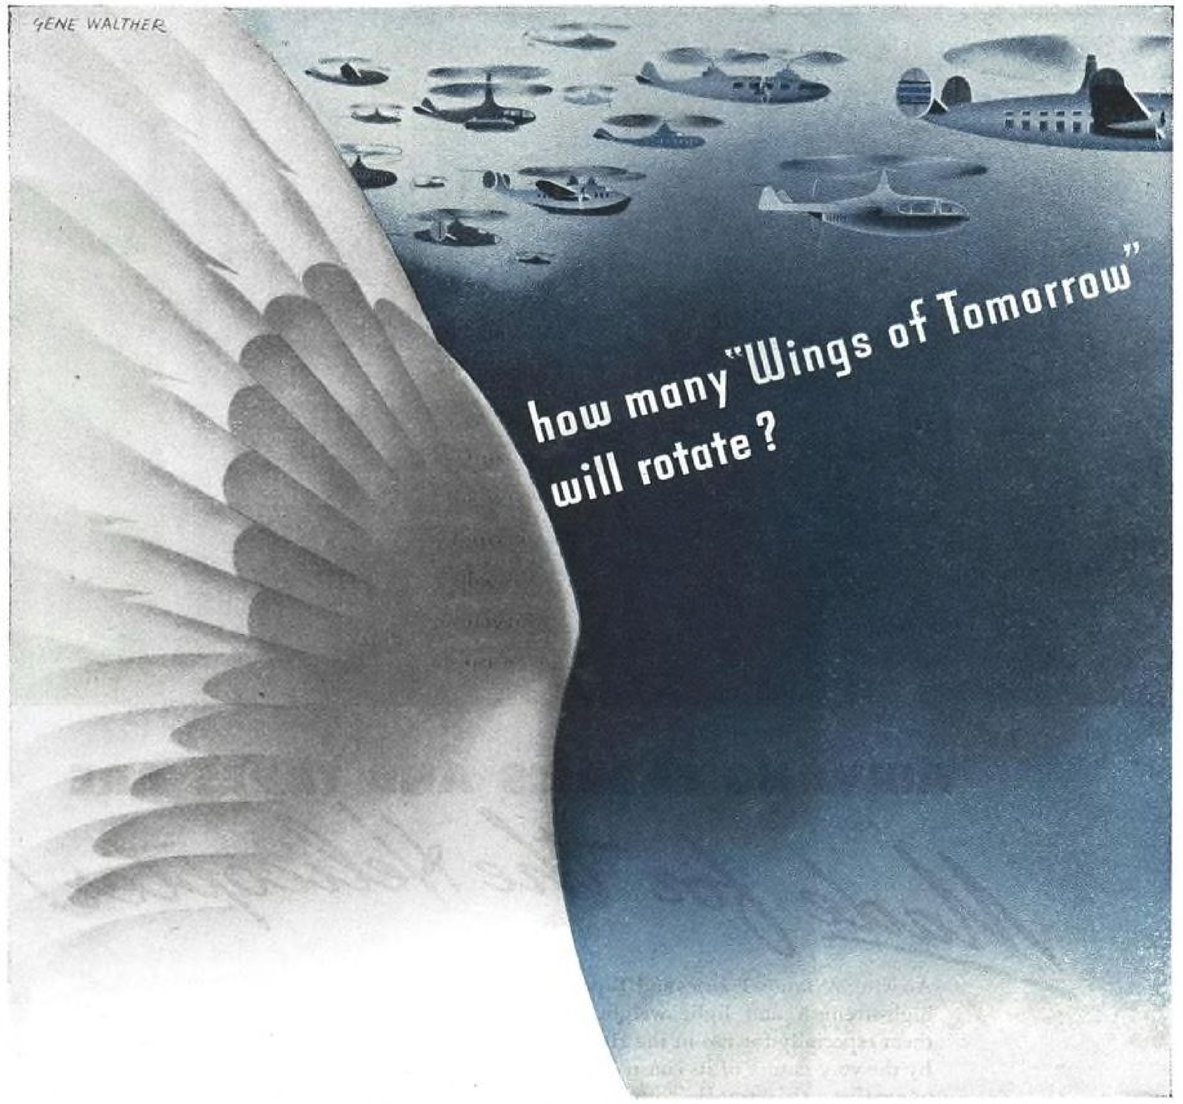

The American public, the aviation industry in general and a number of aircraft manufacturers in particular would like a specific answer to this question . . . and we wish that we could give it. This much can be said, however, with but little likelihood of disagreement. At no time in the twenty-odd years since the world witnessed the first practical flight of a rotary wing ship, has professional and public interest in rotary wing flight been as active as at present, *nor has the future of the field been as promising* ★ The Autogiro Company of America has been engaged in rotary wing research and development longer than any other organization in America. Its engineering and research staff; its records of development, experimentation and thousands of hours of flight, and the right to use its numerous inventions, offer incalculable assistance to licensees. We shall be pleased to discuss details of Autogiro Company licensing arrangements with interested aircraft or other manufacturing executives ★ AUTOGIRO COMPANY OF AMERICA, Willow Grove, Pennsylvania.

Companies now producing for the war, under license from the Autogiro Company of America, include:
THE FIRESTONE TIRE & RUBBER COMPANY (G. & A. AIRCRAFT, INC.)
KELLETT AIRCRAFT CORPORATION
UNITED AIRCRAFT CORPORATION (SIKORSKY DIVISION)

AUTOGIRO COMPANY OF AMERICA ★

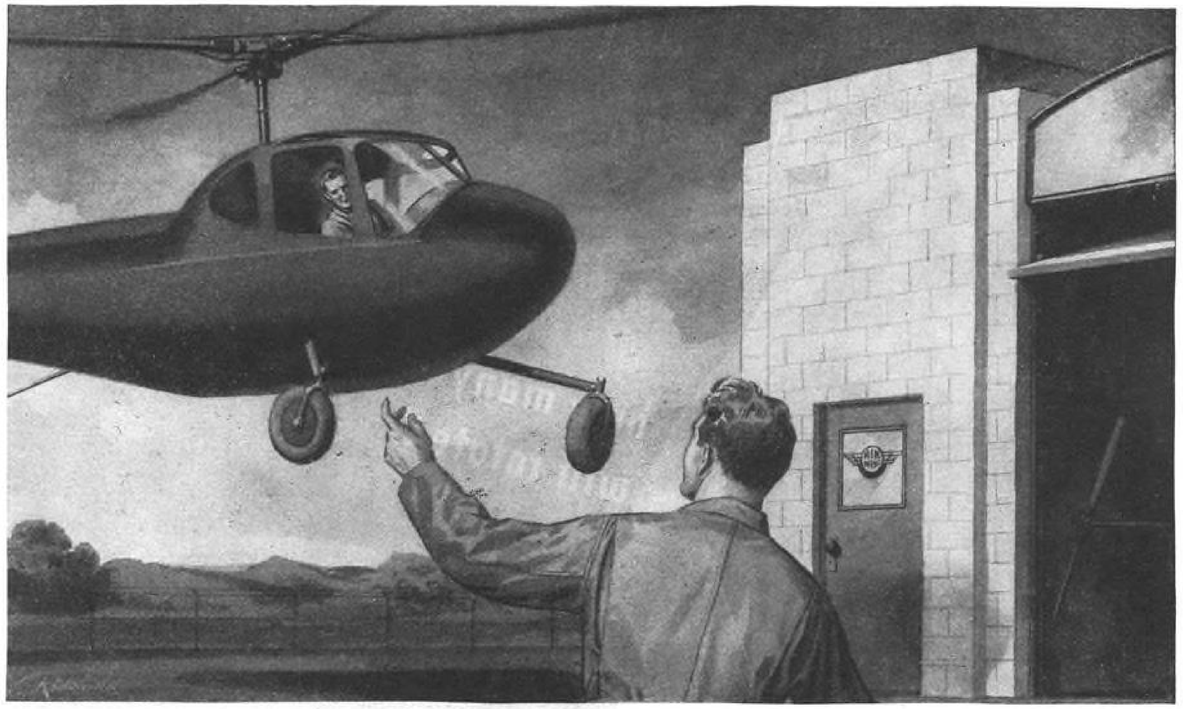

AIRWING FABRICS AND TAPES ARE *Made for the Helicopter!*

Airwing Aviation Fabrics and Tapes stress high-strength and light weight, fitting them especially for use in the Helicopter. By the very nature of its construction and operation, this small, compact, light weight plane demands great durability with a minimum of bulk. Airwing Fabrics, with their closely woven long staple cotton fibres, are especially suited to the covering of its rotor blades and fuselage, while Airwing Tapes insure extra strength and protect against friction at many vital points.

In addition to fabrics for Helicopters, the Airwing line includes other airplane and glider fabrics, balloon and special cloths. Airwing Tapes come in a complete selection—Grade A made from long staple Pima cotton, Lightweight and Utility—pinked edge, sealedge, biased, and predoped.

If stock items of cloths or tapes do not meet your requirements, bring your special problem to Thurston—supplier to the Army and Navy since World War I.

REG. U. S. AIR WING FABRICS PAT. OFF.

W. HARRIS THURSTON, INC.
Division of Reeves Brothers, Inc.
40 WORTH ST., NEW YORK 13
Factory and Warehouse
17 BEACH ST., NEW YORK

WRITE US FOR THE NAME OF YOUR NEAREST AIRWING DISTRIBUTOR

Timken Seamless Tubes for Piston Pins Saves $60,000.00



A prominent manufacturer of six-cylinder Diesel engines is reaping sensational savings by using Timken Seamless Steel Tubes instead of bar stock as material for piston pins.

By using Timken Tubes, drilling, boring and turning operations were reduced to a point where the production of one machine equalled the total output of five using bar stock.

These economies enabled the manufacturer to save $100 per engine. At the present rate of production his *annual savings will be $60,000.00.*

Similar savings may be possible on your product. The quality of your product too may be improved because the unexcelled quality of Timken Steels is controlled by one closely knit organization from melt shop to finished product.

Investigate the wide range of Timken Seamless Tube sizes available in alloy and carbon steels of electric and open hearth grades. Steel and Tube Division, The Timken Roller Bearing Company, Canton 6, Ohio.

TIMKEN
TRADE-MARK REG. U. S. PAT. OFF.
SEAMLESS STEEL TUBES





then he thought to himself

"WHY WAIT 'TIL YOU'RE CORNERED?"

AT his recent reception in Washington, General DeGaulle and General Pershing were deploring the havoc of the war and hoping some good might result. DeGaulle remarked that perhaps Mahomet had something when he ventured the statement:

"Without war, the world would be in a condition of stagnation."

It is a sad commentary on human inertia that men must wait until the gun is jabbed in their ribs before they will stir themselves to great effort.


But it seems a fact that men usually wait for a crisis before they get bold and take hurried recourse to the best means for liberation.

Even today, some business men are waiting for the pointed guns of competition before taking action. And others . . .

"WHY WAIT 'TIL YOU'RE CORNERED?" *he says*

LOOK, GENERAL, how some are beating the gun of competition through recourse to these Lincoln developments:



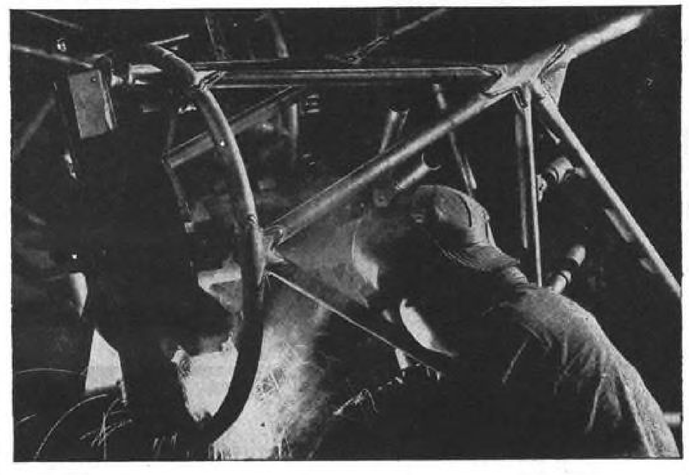

Gun Beater:

"SHIELD-ARC JR." AIRCRAFT WELDER

Dual continuous control provides the right TYPE of arc and the right AMPERAGE for every job . . . a "tailor-made" arc at the twist of a wrist. Ask for Bul. 338.

Gun Beater:

THE "LINCONTROL"

Gives accurate control of arc by foot operation, minimizing welding interruptions and operator fatigue. Convenient, light-weight. Full details in Bul. 341.

Gun Beater:

"PLANEWELD" ELECTRODES

For chrome-moly steels . . . all welding positions. Produce smooth welds with minimum spatter. Physical properties similar to base metal. Details and procedure in Bul. 402.

Gun Beater:

"FLEETWELD" ELECTRODES

Recognized as the world's leading electrodes for mild steel . . . for *speed* . . . for *quality welds* . . . for *low cost*. In six types to suit the job. See the "Weldirectory," Bul. 402.


THE LINCOLN ELECTRIC COMPANY • CLEVELAND 1, OHIO

America's greatest natural **recourse**

ARC WELDING

Here's one of the HALL Multiple Spindle Eccentric Valve Seat Grinders as used by Packard for high speed production of Rolls-Royce airplane engines. Grinds six seats simultaneously with identical precision and finish.

HALL Multiple Spindle Production Valve Seat Grinders and Service Grinders have been adopted wherever airplane engines of either in-line or radial type are produced or serviced.

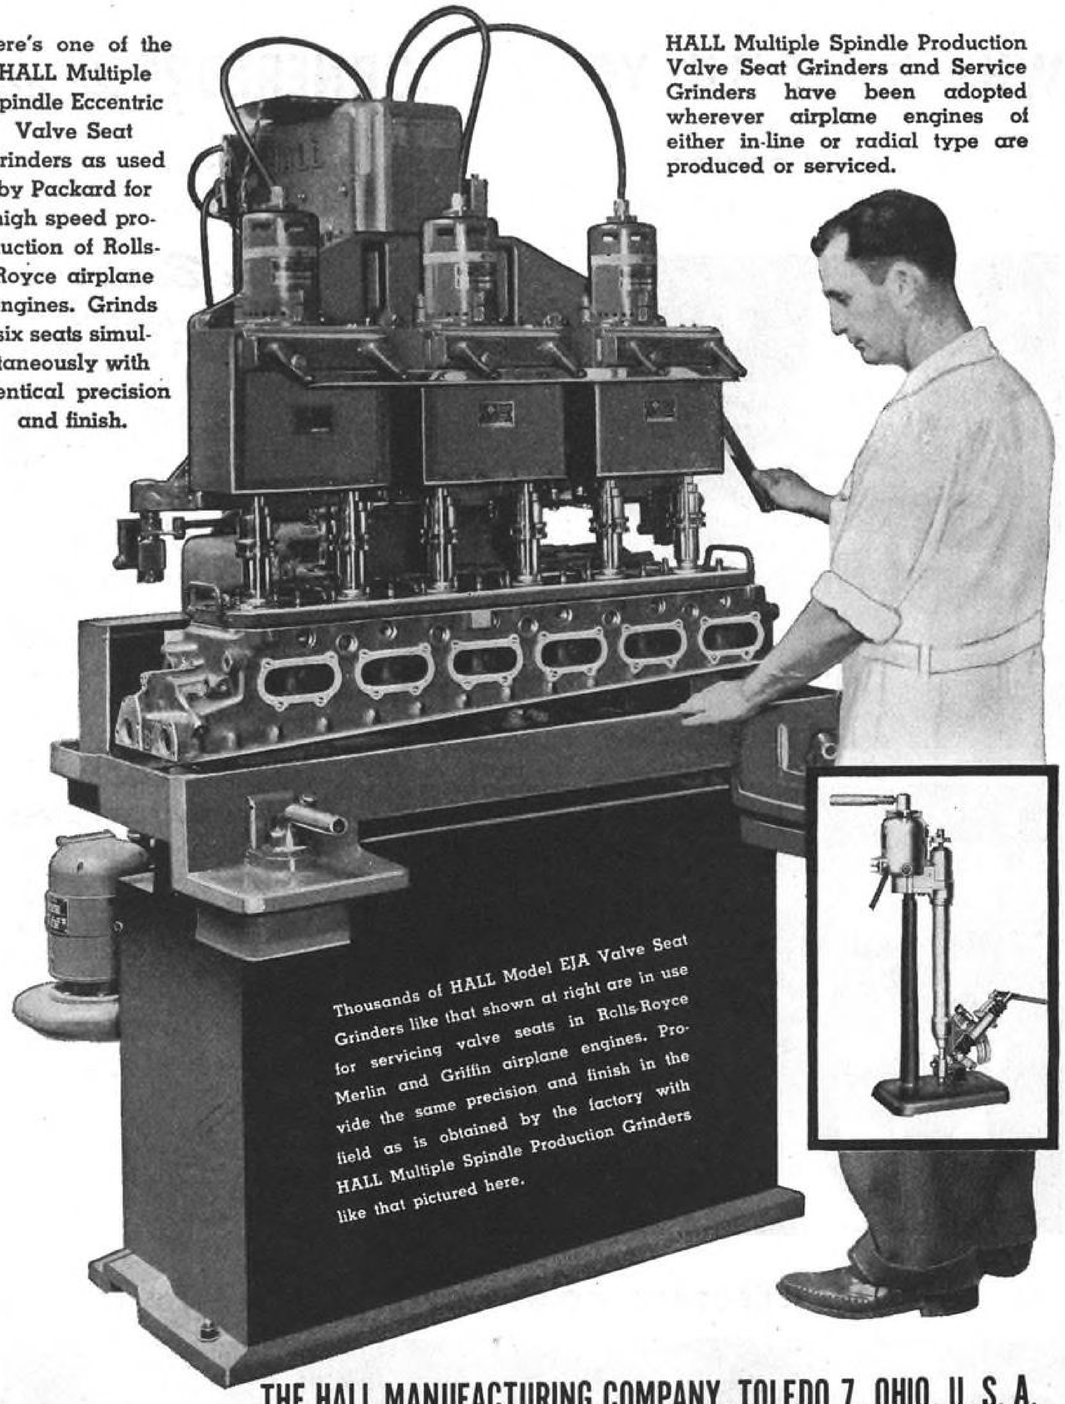

Thousands of HALL Model EJA Valve Seat Grinders like that shown at right are in use for servicing valve seats in Rolls-Royce Merlin and Griffin airplane engines. Provide the same precision and finish in the field as is obtained by the factory with HALL Multiple Spindle Production Grinders like that pictured here.


THE HALL MANUFACTURING COMPANY, TOLEDO 7, OHIO, U. S. A.

HALL

BONDED

with Chicago FV

the Pedigreed Bond

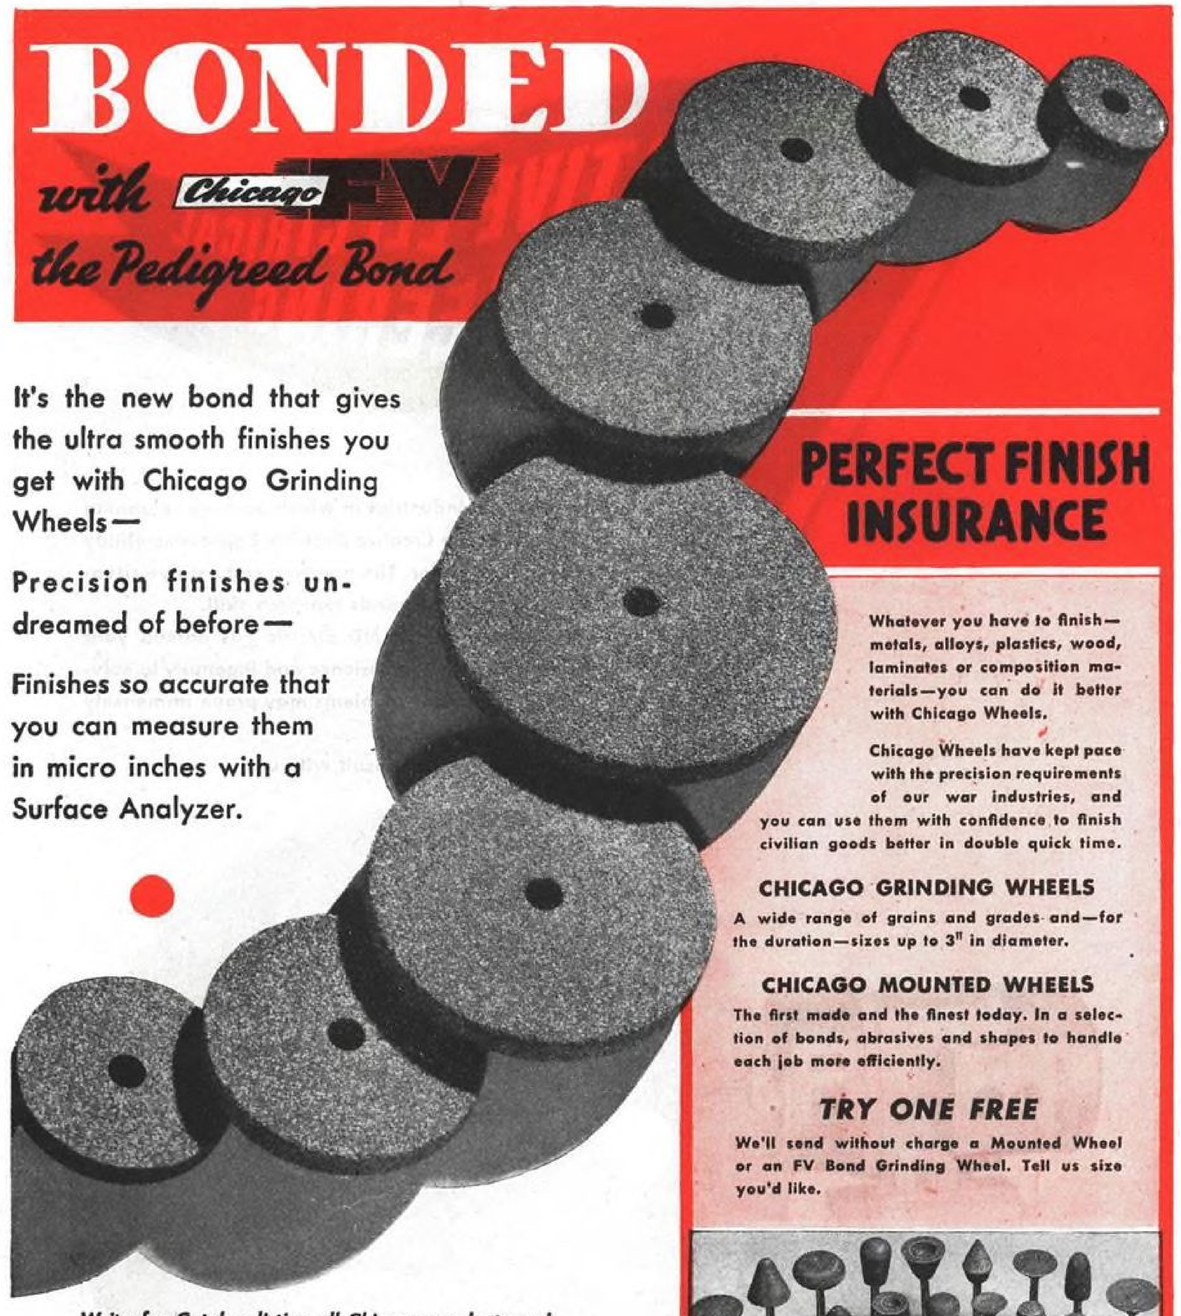

PERFECT FINISH INSURANCE

It's the new bond that gives the ultra smooth finishes you get with Chicago Grinding Wheels—

Precision finishes undreamed of before—

Finishes so accurate that you can measure them in micro inches with a Surface Analyzer.

Whatever you have to finish—metals, alloys, plastics, wood, laminates or composition materials—you can do it better with Chicago Wheels.

Chicago Wheels have kept pace with the precision requirements of our war industries, and you can use them with confidence to finish civilian goods better in double quick time.

CHICAGO GRINDING WHEELS

A wide range of grains and grades and—for the duration—sizes up to 3" in diameter.

CHICAGO MOUNTED WHEELS

The first made and the finest today. In a selection of bonds, abrasives and shapes to handle each job more efficiently.

TRY ONE FREE

We'll send without charge a Mounted Wheel or an FV Bond Grinding Wheel. Tell us size you'd like.



Write for Catalog listing all Chicago products and showing comparative photographs of finishes with different kinds of Wheels.

ARMY E NAVY

MOUNTED WHEELS SMALL GRINDING WHEELS

CHICAGO WHEEL & MFG. CO.

Headquarters for Mounted Wheels and Small Grinding Wheels

1101 W. Monroe St., Dept. Av. Chicago 7, Illinois

*Half a Century of Specialization has established our Reputation as the Small Wheel People of the Abrasive Industry.

Send Catalog. Interested in AV-11

☐ Mounted Wheels. ☐ Grinding Wheels.

☐ Send Test Wheel. Size.....

Name.....


Address.....

CREATIVE ELECTRICAL ENGINEERING

There are few industries in which post-war planning does not involve *Creative Electrical Engineering* ability of the highest order. The exacting competitive situation developing demands topnotch skill.

On its record, LELAND Electric has earned your consideration. Our experience and ingenuity in solving tough electrical problems may prove immensely valuable to you.

We invite you to consult with us.

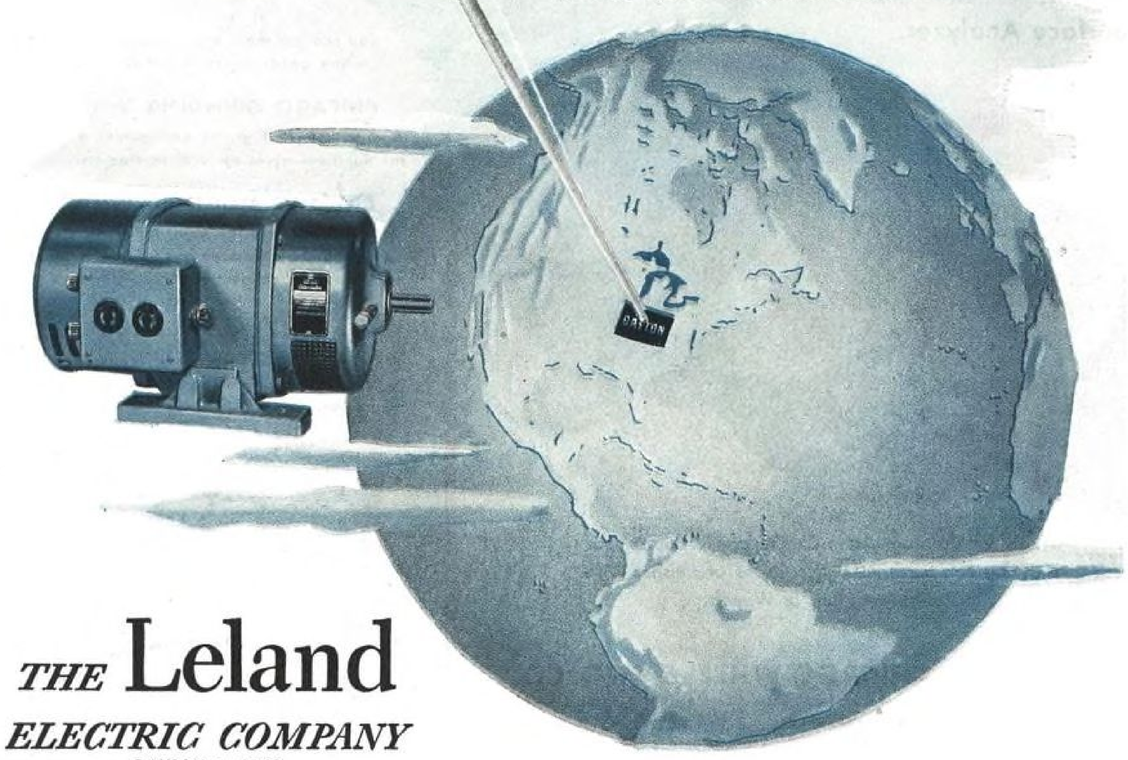

THE Leland
ELECTRIC COMPANY

DAYTON 1, OHIO

In Canada: Leland Electric Canada Ltd., Guelph, Ontario

Alternator

Self-excited, can be used with electric motor or gasoline drive, up to 2½ KW output, general purpose electric power supply.



Keep Your Production Machines
ABOVE THE LEVEL OF ATTACKS
with the help of VEEDER-ROOT "COUNTROL"


Production machines can be kept out of difficulties . . . from mechanical trouble, over-runs and shortages . . . when they are monitored by Veeder-Root Counting Devices that keep continuous count of machine-performance. For the black-and-white figures that keep turning up, on the counter-faces, warn of any impending raids in the way of slow-downs or breakdowns.

Many leading builders of aircraft, engines, and aeronautical equipment rely on Veeder-Root "Countrol" as a basis for production planning and for maintaining *and co-ordinating* production schedules all along the line, so that final assembly is not bogged down by delays and shortages in any one department. And Veeder-Root Counting Devices are quick and easy to install, without interrupting production. Find out just how Veeder-Root "Countrol" can help to make your motive power, manpower, and machine power *count for more than ever* before. Write to Veeder-Root Inc., Hartford 2, Conn. In Canada: Veeder-Root of Canada, Ltd., Montreal.




Resetting High-Speed Counter, used on coil-winding machines, and for special types of high-speed work.

Prevent Production Losses with
VEEDER-ROOT COUNTING DEVICES

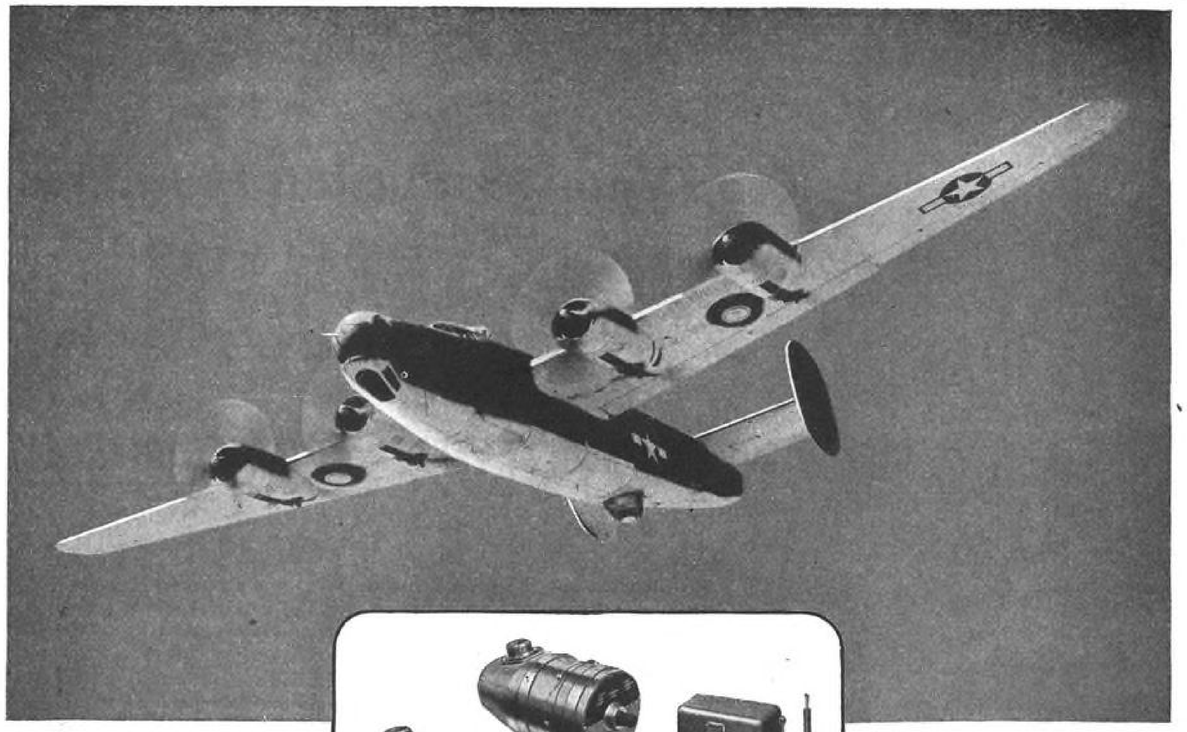

Consolidated's design of Navy-type "Liberator" four-engine heavy patrol bomber. Photo courtesy Consolidated.

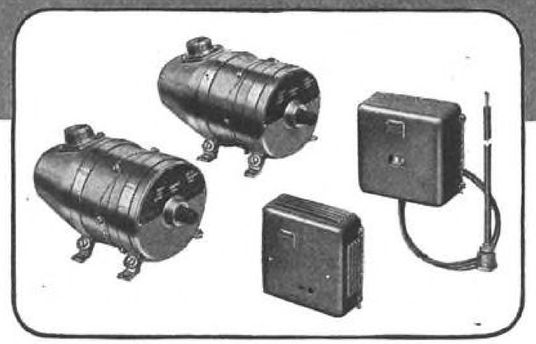

Barber-Colman Control Motors and Thermostats which maintain uniform temperatures in the "Liberators" cabin.

BARBER-COLMAN CONTROLS


FOR A UNIFORM CABIN TEMPERATURE IN NAVY-TYPE "LIBERATOR"

BARBER-COLMAN contributes to the efficiency and effectiveness of the famous Navy-type "Liberator" by providing automatic electric control equipment for the maintenance of uniform cabin temperature. It consists of the two Power Units and two Thermostats shown above plus a Three-way Override Switch. The Remote Bulb Thermostat controls one Power Unit on mixing dampers which blend air from the heaters with ram intake air so as to maintain a specified duct temperature. The Cabin Thermostat controls the other Power Unit on the air valve to the cabin duct system, governing the volume of heated air necessary to maintain a uniform temperature in the cabin. Anti-icing heat for the tail surfaces is obtained by means of the Three-way Switch, which can override the Cabin Thermostat. This allows a maximum of heated air to be supplied to the empennage duct system. The equipment functions rapidly and accurately to meet the fast-changing conditions encountered in flight. It is light, compact, and durable—specially designed for aircraft service. This and various other Barber-Colman Control Systems are available for many aircraft applications. Write to Barber-Colman engineering department for full details.

BARBER-COLMAN COMPANY
1221 ROCK STREET • ROCKFORD, ILLINOIS

The lights go up

ON PHOTO-REPRODUCTION!

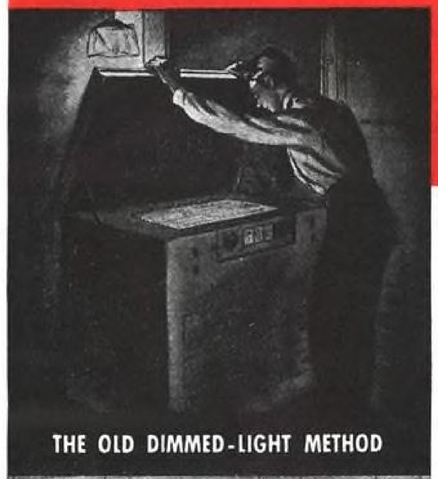

THE OLD DIMMED-LIGHT METHOD



THE NEW PEERLESS PHOTO-ARC WAY

Now you can make photographic contact-prints from your pencil originals in a normally lighted room. No semi-darkroom—NO NEED TO DIM LIGHTS. No danger of fogging. No trouble in handling.

And quality goes up, too!

A revolutionary improvement in contact papers! The new Photo-Arc anti-diffusion emulsion gives greater latitude, greater contrast, greater density than ever before—hence greater legibility. CLEAN, SHARP LINES. No fuzziness. No lost details.

PEERLESS PHOTO-ARC
REPRODUCTION PAPERS

give you every advantage that the *best* of other papers can give—*plus* three big advantages that *no* other papers can give!

1. The *only* silver-emulsion reproduction papers which can be run in *any* kind of continuous blueprint machine.
2. The *only* papers which can be handled and processed without dimming lights.
3. The *only* reproduction papers of *any* type which incorporate the new anti-diffusion characteristics. This exclusive Peerless development greatly improves definition and permits full, non-critical exposures without closing up or losing fine lines.

Send for literature giving full information

The Photo-Arc way is the one best way

TO CREATE SHARP BLACK AND WHITE PRINTS
from pencil drawings

TO COPY OLD BLUEPRINTS
or other types of reproduction


TO MAKE REFLEX NEGATIVES
from opaque originals or from blueprints which have been marked or soiled on the back


TO MAKE POSITIVES
reproducing the originals in intense black on white paper

INDUSTRIAL PEERLESS PHOTO PRODUCTS SHOREHAM, L.I. NEW YORK PHOTO PROCESSES

Manufactured only by
PEERLESS PHOTO PRODUCTS, INC.
Dept. B, 50 Broadway, New York 4, N. Y.

Exide
in the Stratosphere

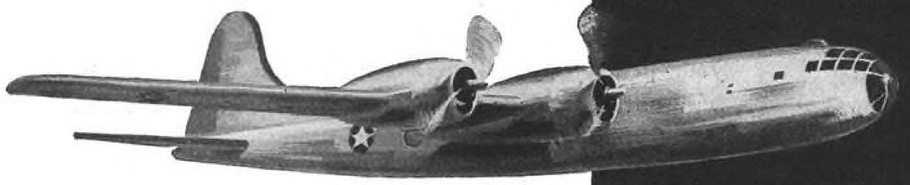

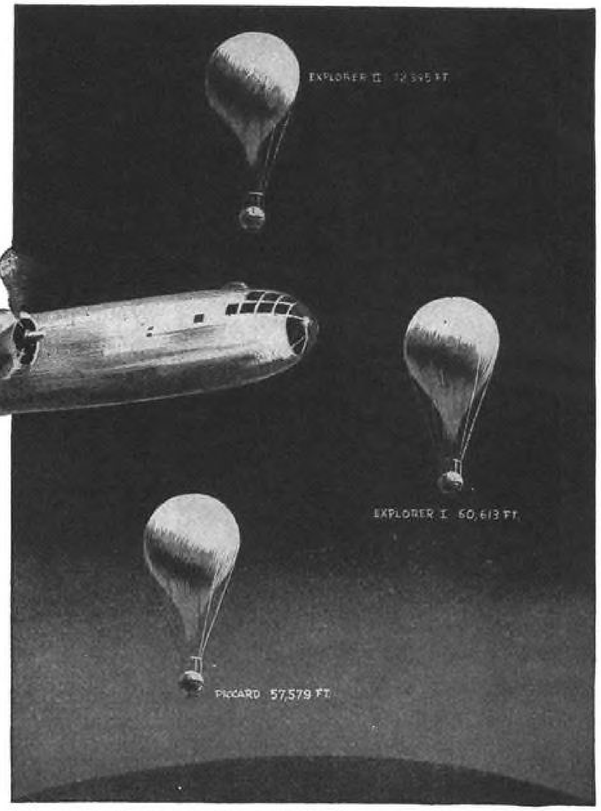

1935 . . . when world's altitude record was made

1944 . . . when other records are toppling

Explorer I and Explorer II were balloons of the National Geographic Society—U. S. Army Air Corps Expedition. Instruments used on these flights, and on that of Mr. and Mrs. Jean Piccard, were devised and installed by scientists of the Bartol Research Foundation of the Franklin Institute.

IN 1935, when the stratosphere balloon, *Explorer II*, rose to the greatest height ever reached by man (72,395 feet), Exide Batteries were aboard, operating the scientific instruments, camera and radio. Exides also accompanied the stratosphere flights of *Explorer I* and of Mr. and Mrs. Jean Piccard, both of which flights were made in 1934.

In such exacting and highly scientific work as this, absolute constancy and dependability were essential. Because conditions were exceptionally severe, only equipment that was thoroughly trustworthy could be used . . . for no second try was possible. It is these same conditions which again bring Exides into the stratosphere . . . riding our mighty bombers and operating that vast assemblage of equipment which you know so well.

That Exide Batteries are chosen for so many important missions is recognition of their long record of trustworthy performance. Scientists and aviation engineers have learned from repeated experiences that they can count on Exide Batteries for dependability, long-life and ease of maintenance.

A Letter from "Down Under"

Every day interesting letters are received from some of the more than 1,300 Exiders in the Service. The following letter came from a Seabee in the South Pacific: "I'm now overseas, and have been for the last five months. I'm now working in the Maintenance Department . . . All of our batteries are none other than Exide. We never have an ounce of trouble with it. So I hope all the fellows keep up the good work".

ARMY E NAVY

Exide
AIRCRAFT BATTERIES


THE ELECTRIC STORAGE BATTERY COMPANY, Philadelphia 32
Exide Batteries of Canada, Limited, Toronto

ISO-REV Constant Speed PROPELLERS
FOR UNSURPASSED EFFICIENCY

ISO-REV **precision constant-speed governing at any RPM selected during flight, irrespective of power input or air speed, affords take-off at 100% of available horsepower plus optimum aerodynamic propeller efficiency and engine economy under all conditions of flight.**

Today our entire energies and resources are devoted to the nation's war effort.

We feel fortunate that our contribution toward victory may also place added enjoyment and utility within reach of the plane owner of tomorrow.

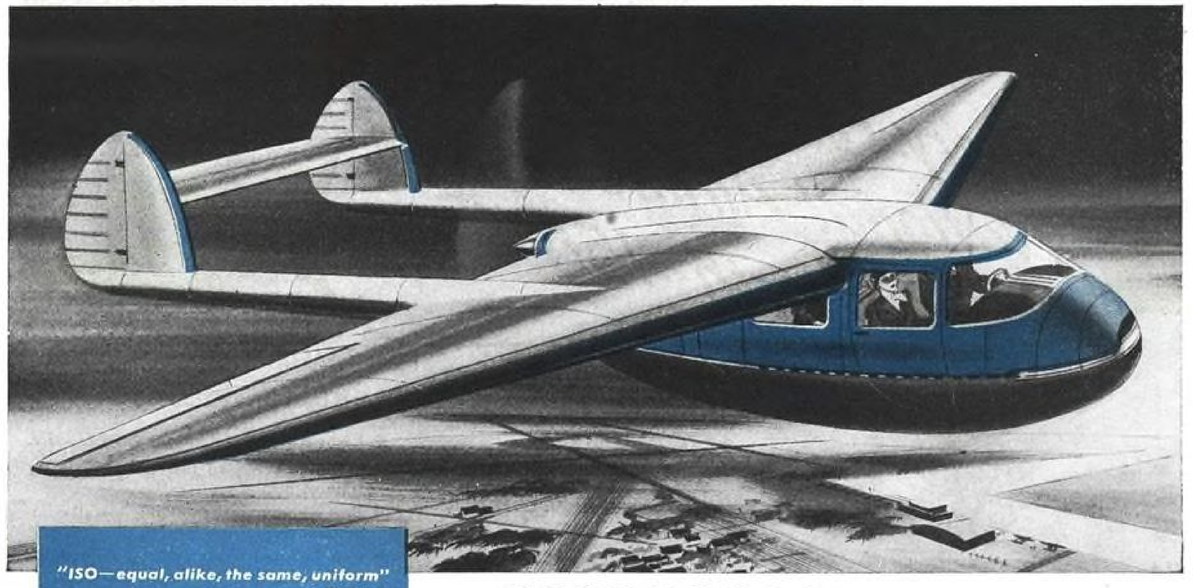

"ISO—equal, alike, the same, uniform" Webster

ISO-REV *propellers*

CONSTANT SPEED

AIRCRAFT SPECIALTIES DIVISION

ZIMMER-THOMSON CORPORATION

29-05 Review Avenue, Long Island City 1, New York



Every Pound Saved on a National Airlines Plane Is Worth $156.04



SAYS G. T. BAKER
President
NATIONAL AIRLINES, INC.

"Airplane weight savings have a highly practical value to manufacturers and airline operators. To the commercial operator, every pound of unnecessary weight saved means increased earning capacity.

"National Airlines' maintenance and operations figures show $156.04 as the annual value of one pound weight saved per airplane operated by us.

"We find BOOTS NUTS very fast to attach—they can be used over and over again and they outlast the plane."

Boots Nuts Save Up to 60 Lbs. Per Plane

- Lighter, *all-metal* Boots are tougher, safer.
- Wartime standard fastenings on every type of military aircraft.
- Post war standard fastenings on all commercial ships.
- Can be used again and again, without weakening their self-locking grip.
- They'll "outlast the plane."
- Approved by every government aviation agency.

BOOTS STEEL ANCHOR NUT

(W2S #8-32) The comparable fiber nut is 151.2% heavier than this all-metal, steel, self-locking nut.



SEND FOR FREE WEIGHT-SAVING BOOKLET

Actual weights of over 250 different self-locking nuts used in aircraft, comprehensively reviewed for the convenience of aircraft designers, engineers, operating and maintenance personnel. Copy will be sent you, free, on request.

BOOTS *SELF-LOCKING NUTS*
"They Fly With Their Boots On—Lighter"

Boots Aircraft Nut Corporation, General Offices, New Canaan, Conn., Dept. I

Representatives in New York • Chicago • Detroit • Indianapolis • Los Angeles • Kansas City • Dallas • Toronto • Montreal • Vancouver

HOW TO LOWER YOUR X-RAY FILM-PROCESSING COST

Drain off your old x-ray film processing solutions and fill up with Supermix Developer and Fixer.

Because of their long life, these liquid chemicals are economical to use, processing x-ray films at a lower cost per square inch.

Additional economy is achieved by revitalizing the Developer periodically with Refresher, thus making the Developer last up to four times longer.

Order economical Supermix film-processing chemicals today. Address your nearby G-E Branch Office.

Today's Best Buy — *U. S. War Bonds*



GENERAL ELECTRIC X-RAY CORPORATION
2012 JACKSON BLVD. CHICAGO (12), ILL., U. S. A.


CLIP THIS SCHEDULE OF ECONOMICAL DISCOUNT PRICES

	Developer	Refresher	Fixer
On bottles to make ONE GALLON			
per bottle	$1.00	$1.15	$1.00
per case of 12 bottles	.90	1.03	.90
On bottles to make 3 GALLONS			
per bottle	2.75	----	2.70
per bottle in lots of 6 or more	2.47	----	2.43
On bottles to make 5 GALLONS			
per bottle	4.50	5.25	4.25
per bottle in lots of 4 or more	4.05	4.72	3.82


Prices f. o. b. U. S. Branches. Prices will be increased by the amount of such sales (or use) tax as may be applicable.



TACK IT WITH A CHERRY

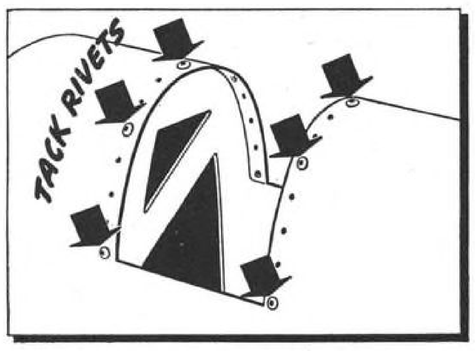

Trick Cowling— bends and curves that buckle and twist? Tack 'em first with Cherry Tack Rivets. Economical, save time.

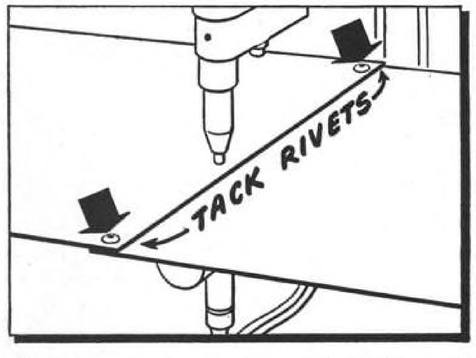

Welding long, wide sheets? Hold 'em tight with Cherry Tack Rivets. No obstructions and they are easily removed if desired.

Here's a special new hollow type Cherry Rivet that makes an ideal temporary fastener for metals, plastics, wood, rubber, fabric—soft and pliable materials. Just bind the assembly with a few well placed Cherry Tack Rivets. (Don't use Cherry self-plugging type rivets for tacking.) Then proceed to finish the job as specified—weld, rivet or stitch—easy, quick and neat.

Cherry Tack Rivets hold tight—up to a 300 pound force in a firm grip. The strong clinch eliminates shift, slide and wobble. Not critical as to size of hole or thickness of material. No obstruction above job to interfere with work. Easy to remove—pilot hole ready for drill—cuts engineering costs.

Economical, fast, flexible—and of course works "blind" from one side of the job only.



Learn how easy it is to use Cherry Rivets. Ask for the new Cherry Rivet Manual, No. B-44. Write to Department A-110, Cherry Rivet Co., 231 Winston Street, Los Angeles 13, California.


CHERRY RIVETS, THEIR MANUFACTURE AND APPLICATION ARE COVERED BY U.S. PATENTS ISSUED AND PENDING

Cherry Rivet
Company
LOS ANGELES, CALIFORNIA

Concentric Transmission Line

by Doolittle

A Standard Product Since 1934

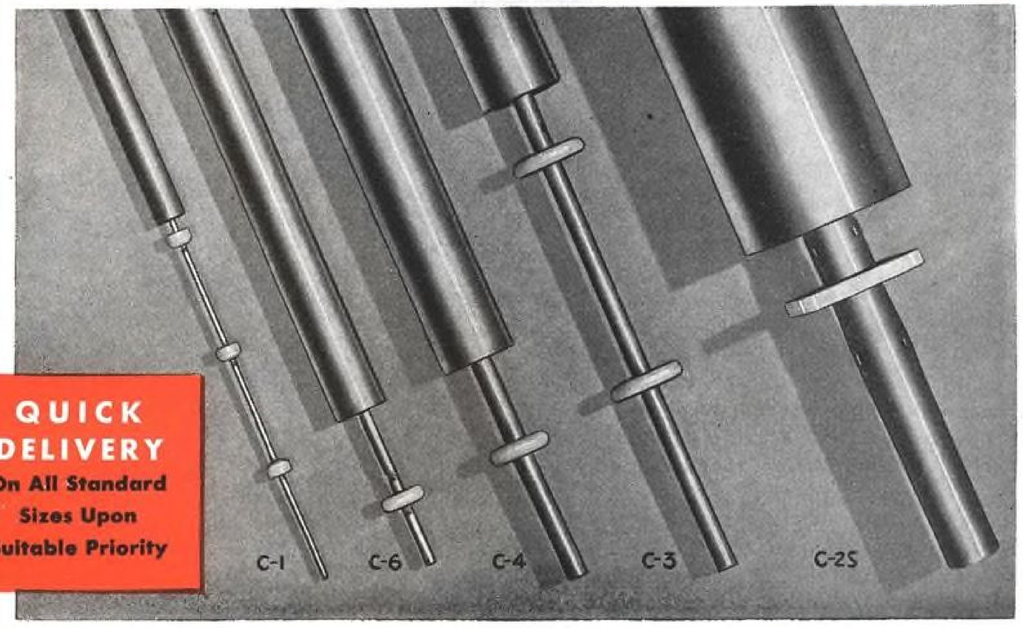

Ten years of experience in building concentric transmission line and associated impedance matching equipment assures you highest quality and workmanship.

Seven standard sizes of Doolittle Lines are listed below. Each line uses seamless copper tubing for the outer and inner conductor, except Types C-1 and C-6 which use solid inner conductors. The insulating heads are made of low loss ceramic—impervious to moisture—spaced and fastened securely for maintaining proper electrical and mechanical characteristics. Carefully designed fittings and accessories for any requirement are also available.

Special sizes are made to order. For engineering information concerning installation and use, feel free to consult our engineering staff.

WRITE FOR CATALOG AND PRICES

Type of line	C-1	C-2	C-25	C-3	C-4	C-5	C-6
Diameter of outer conductor	⅜ in.	2 in.	2 in.	1 in.	⅞ in.	3 in.	⅜ in.
Diameter of inner conductor	.081 in.	⅜ in.	½ in.	¼ in.	¼ in.	¾ in.	.144 in.
*Standard section length, feet	50	20	20	20	20	14	50
Net weight per ft.	2 oz.	10 oz.	1 lb. 1 oz.	8 oz.	8 oz.	1 lb. 10 oz.	4 oz.
Power rating-kilowatts	1	50	50	10	10	100	5
Surge impedance-ohms	70	100	82	75	66	80	73
Loss per 1000 ft. at 1 mc. decibels	.94	.156	.083	.31	.33	.095	.55
Capacity per ft. mmfds	19.8	10.5	12.5	14.1	16.0	12.8	14.8

*A set of couplings for the inner and outer conductors is furnished with each length.

Doolittle RADIO INC.
Builders of Precision Communications Equipment
7421 SOUTH LOOMIS BLVD.
CHICAGO 36, ILLINOIS

Why You'll Be on Top of the World When You Can Buy NUGGETS Again



Because with Nugget Socket Wrenches You Don't Need BOTH 3/8" and 1/2" drive Wrenches . . . and, Mister, that's Economy!


A lot of wrench traditions went smash when Blackhawk scooped the industry with 7/16" drive NUGGETS! That 7/16" drive was dynamite—it blew up all the old ideas about traditional 3/8" and 1/2" drives. *One set* of NUGGETS—with ALL SOCKET AND HANDLES IN ONE DRIVE—does all jobs both 3/8" and 1/2" drive sets ever did. But get this:—ONE SET OF NUGGETS gives you the *same full range of socket sizes at 42% less cost* because *you don't have to pay for two sets of handles* and *duplicate socket sizes!*

These great wrenches have been performance-proved by thousands of mechanics who bought them before the war — and have stood the gaff through toughest wartime service. NUGGETS will be back when famous Hexite Steel is available again. Buy *extra* War Bonds now — set 'em aside for that set of NUGGETS every top-notch mechanic has a yen to own!

A Product of **BLACKHAWK MFG. CO.**
Dept. W21114 Milwaukee 1, Wis.

BLACKHAWK NUGGET SOCKET WRENCHES

THE WRENCHES THAT SMASHED TRADITION

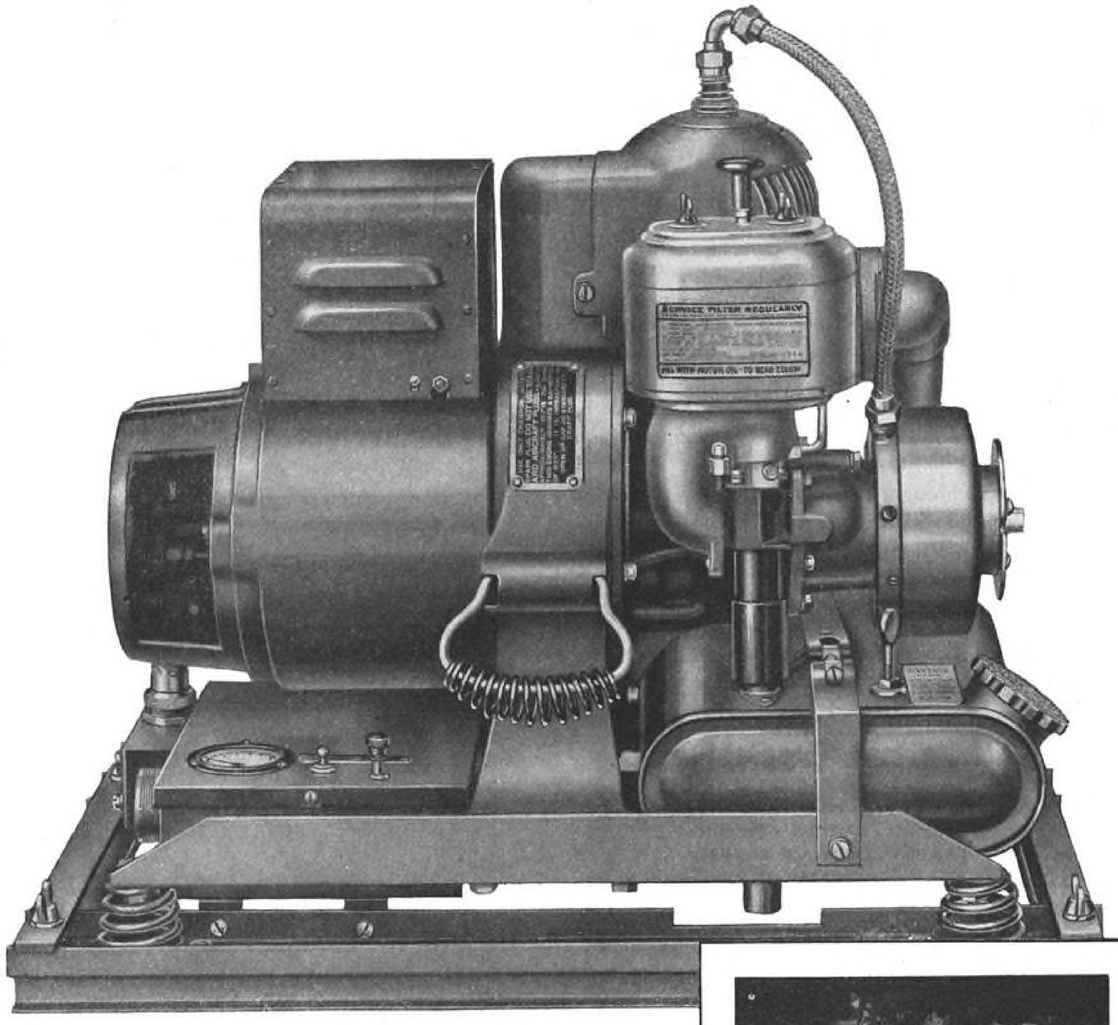

It has to work alone and like it

No and's, if's or but's about it, a Homelite Portable Generator, installed in a plane or a tank is in no position to receive nurse-maid attention. It's usually crammed into some hot, tight corner where it is practically impossible to service it.

Which means just one thing . . . a Homelite Generator with its built-in gasoline engine has to work and stand up under the toughest kind of usage . . . hours on end . . . without receiving any attention or service. To meet demands like this . . . born of war . . . Homelite engineers have developed a higher powered, lighter-weight and, above all, a more dependable gasoline-engine-driven generator . . . a compact, portable Homelite that will meet and pass the performance requirements of any peace-time job.



HOMELITE CORPORATION
PORT CHESTER, NEW YORK



FOR YOUR PEACE-TIME JOBS

The new Homelite Portable Generators that you will use after the war for operating brilliant floodlights or electric tools will work better in winter and summer. They will be more dependable even under the toughest operating conditions. They will work longer hours without attention or service . . . and will be more rugged and powerful than ever before.

Portable Pumps - Generators - Blowers


K&E SLIDE RULES

Think of K & E. What product comes first to your mind? Slide Rules, probably. Or think of Slide Rules. What name do you associate with them? K & E of course.

The reason is simple. For years a K & E Slide Rule has been an integral part of every engineer's equipment, from his student days, right on.

The war brought an avalanche of orders for K & E Slide Rules. We have done our utmost to keep pace with it and are rather proud of the job. But we are still prouder of the quality that makes the K & E Slide Rule reputation what it is.

You will find Don Herold's booklet, "How To Choose A Slide Rule" helpful and amusing. Write to Keuffel & Esser Co., Hoboken, N. J.

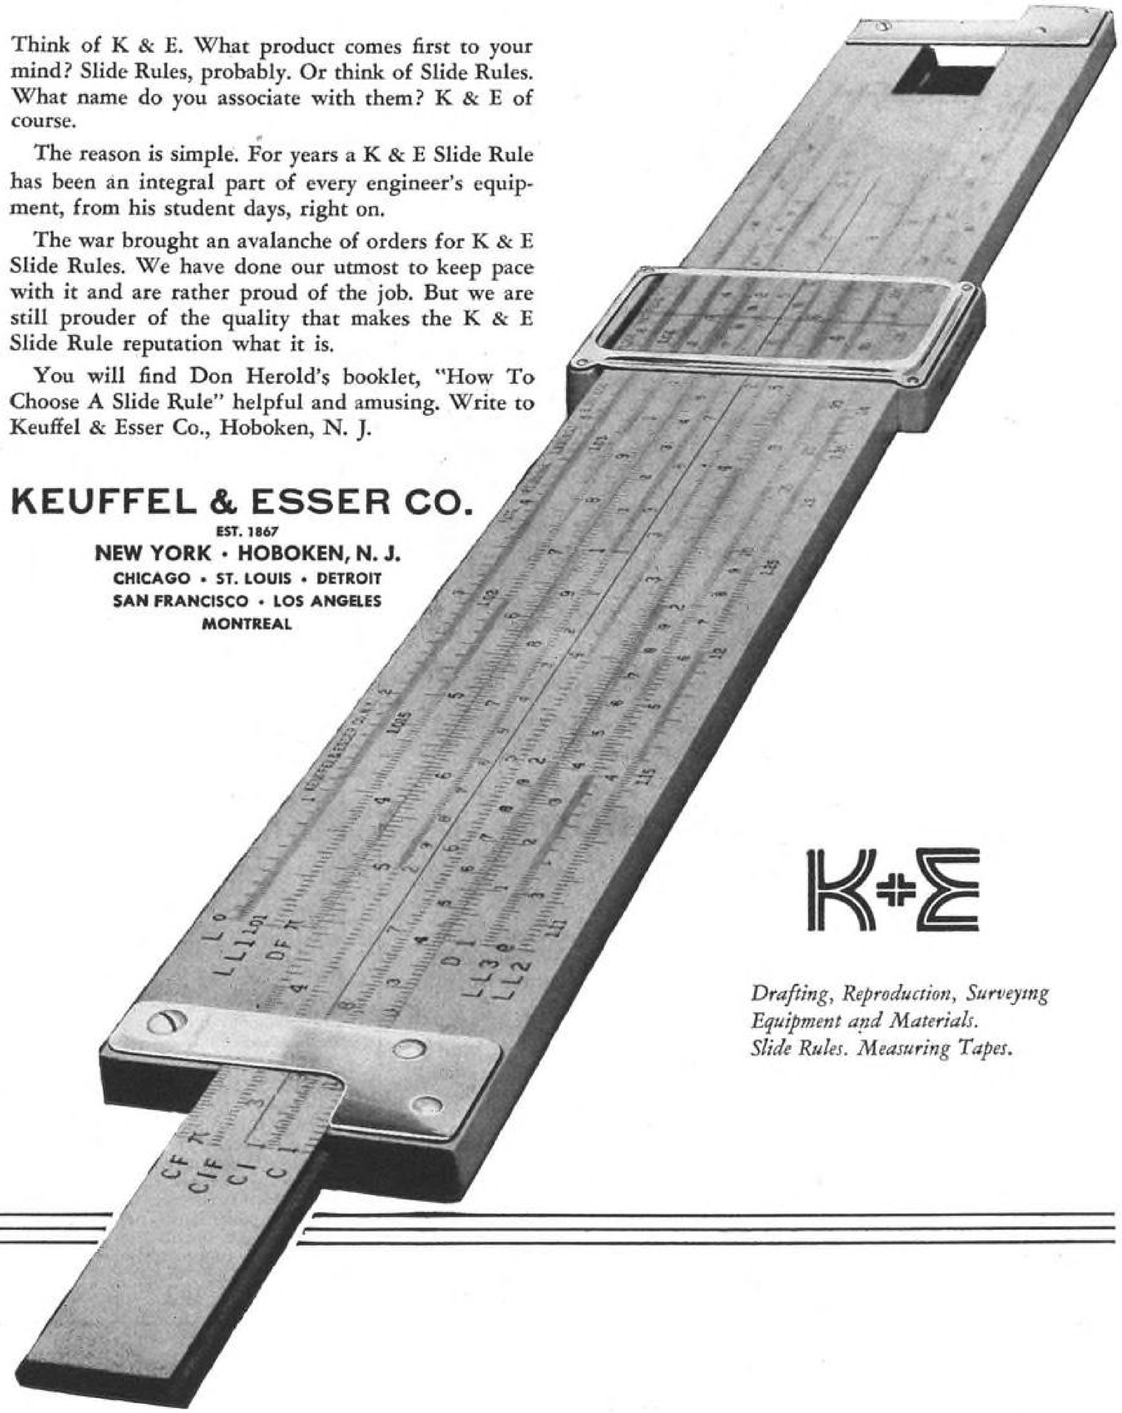

KEUFFEL & ESSER CO.

EST. 1867


NEW YORK • HOBOKEN, N. J.
CHICAGO • ST. LOUIS • DETROIT
SAN FRANCISCO • LOS ANGELES
MONTREAL

K+E

Drafting, Reproduction, Surveying Equipment and Materials. Slide Rules. Measuring Tapes.



"BARRACUDA"

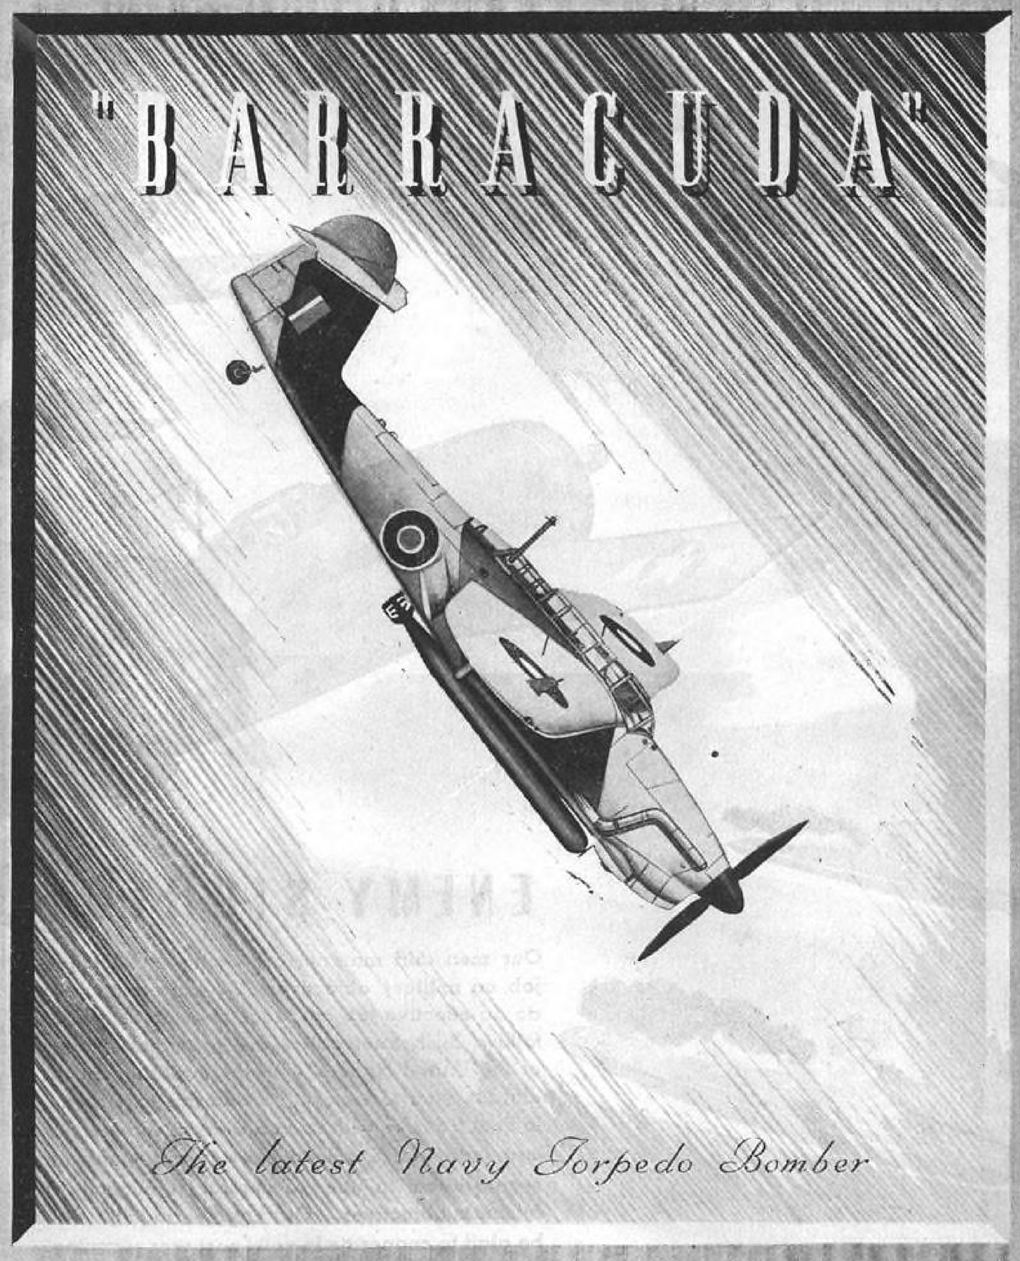

The latest Navy Torpedo Bomber

FITTED WITH

ROTOL

"CONSTANT SPEED" VARIABLE PITCH PROPELLERS

ROTOL LIMITED, ENGLAND • *Canadian Representatives:* BRITISH AEROPLANE ENGINES LIMITED · MONTREAL

THE NEW ALTAIR HYDRAULIC

Shutoff Valve

THIS NEW two-way Shutoff Valve—already in production and being used on the latest military airplanes—has been designed for easier installation—lighter weight—and dependable operation. The valve provides a positive shutoff for any section of a hydraulic system to prevent fluid loss in an emergency.

Mounting has been simplified as there are no obstructions on the face of the valve which require spacers for mounting behind a panel. The valve incorporates famous Altair Plastic Poppets* which are interchangeable in the field without preseating operations. This feature, in addition to the one-piece body construction which cannot be accidentally disassembled, materially simplifies servicing.


The valve weighs only 0.5 pounds. Write today for complete data. Pacific Division, Bendix Aviation Corporation, North Hollywood, California. Sales Engineering offices in New York and St. Louis.

* U. S. Patents Pending


Pacific Division

BENDIX AVIATION CORPORATION

NORTH HOLLYWOOD, CALIFORNIA

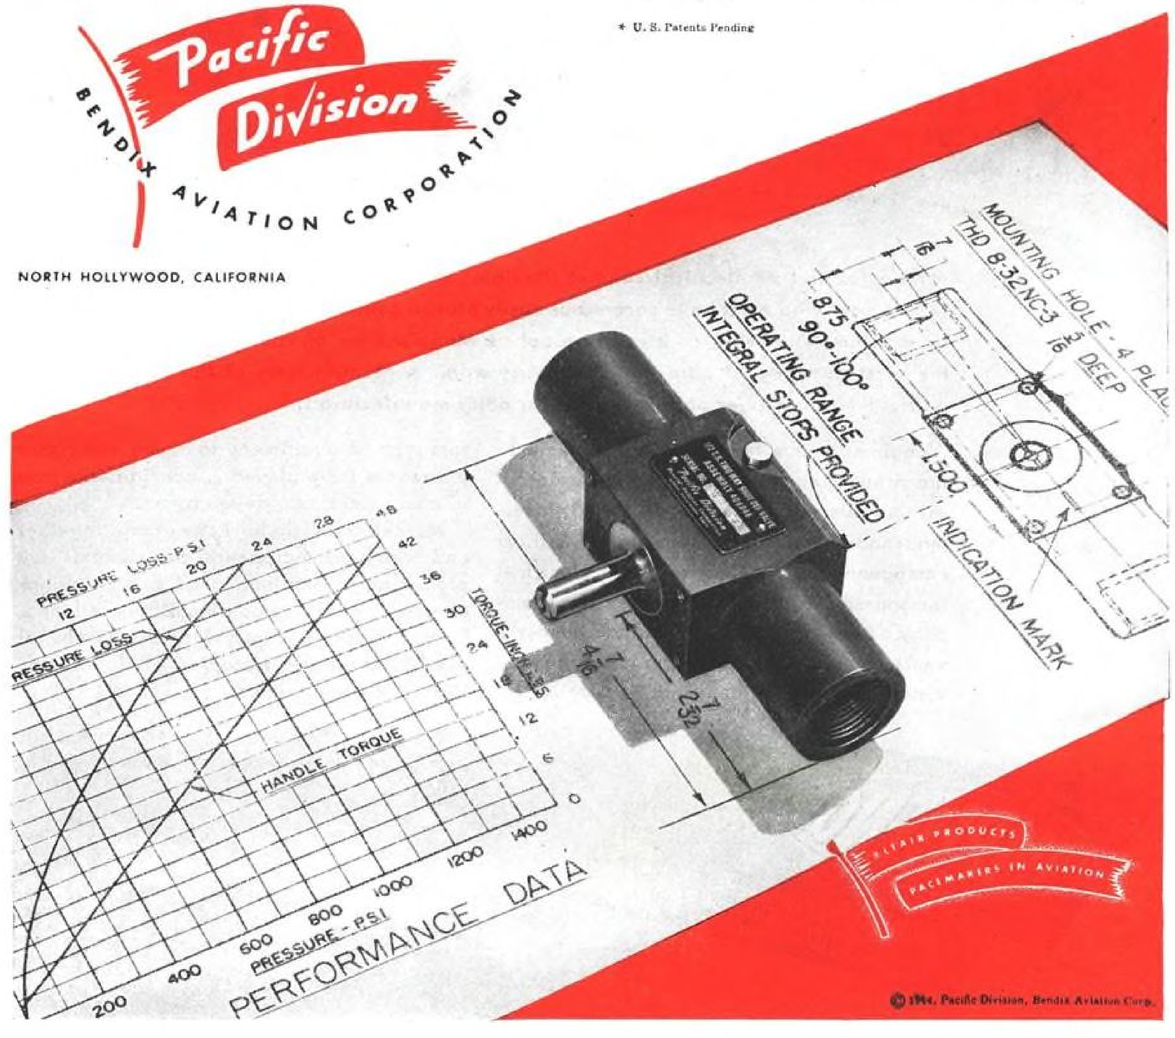


This Is ★AMPHENOL

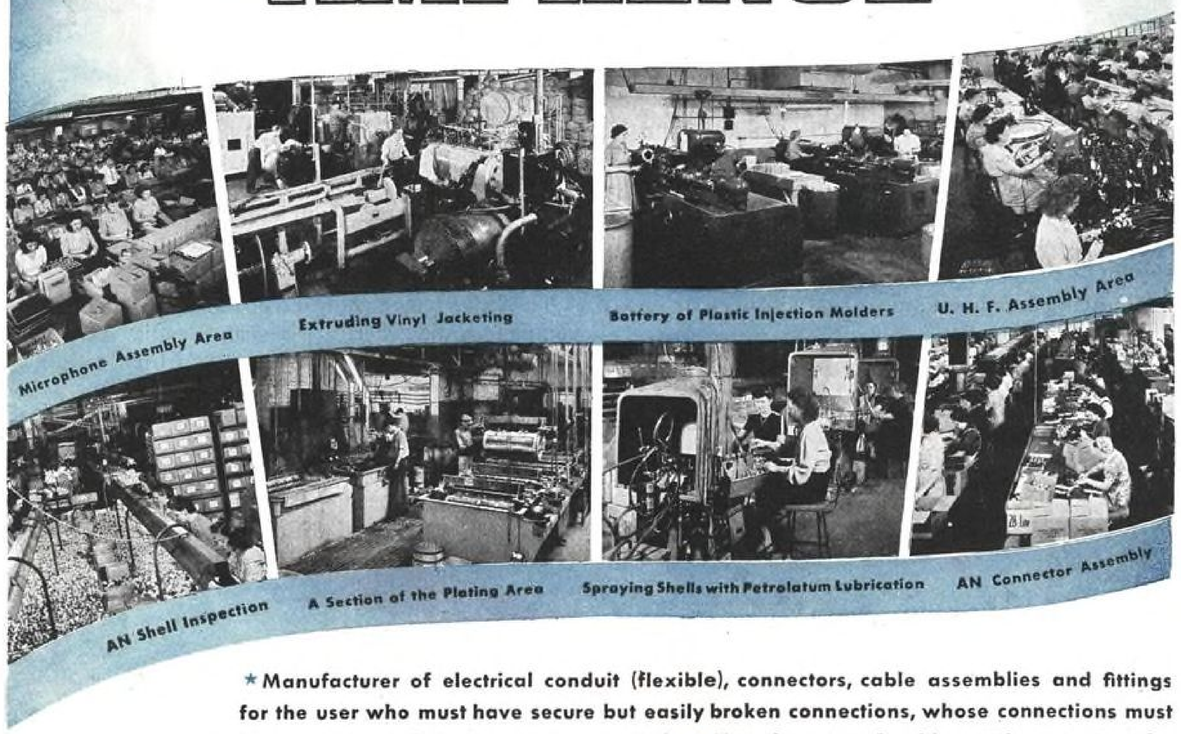


★ Manufacturer of electrical conduit (flexible), connectors, cable assemblies and fittings for the user who must have secure but easily broken connections, whose connections must be moisture, explosion or pressure-proof. ★ Manufacturer of cables and connectors for the most exacting of ultra-high frequency work. ★ Manufacturer of the finest of radio parts. ★ Manufacturer of plastic parts for other manufacturers.

"Amphenol" is a familiar product name to the young men who are seeing it on electrical transmission equipment on ships, planes, tanks and communications equipment. Critical component parts for electronics and electrical transmission equipment has been this Company's field for many years—since the early years of radio broadcasting. Amphenol's vision and ability to design and construct this type of equipment to closer and closer tolerances have played a considerable part in many electronic developments.

Market and supplier have grown together and today all Amphenol departments are producing in astronomical figures, millions of connectors each month, millions of feet of U. H. F. Cable. Industry will find Amphenol one of the biggest factors in production for tomorrow's electronics.

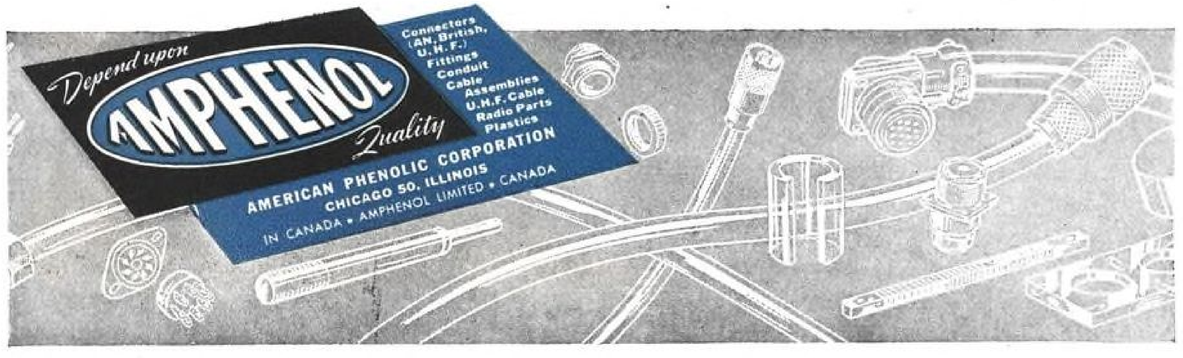

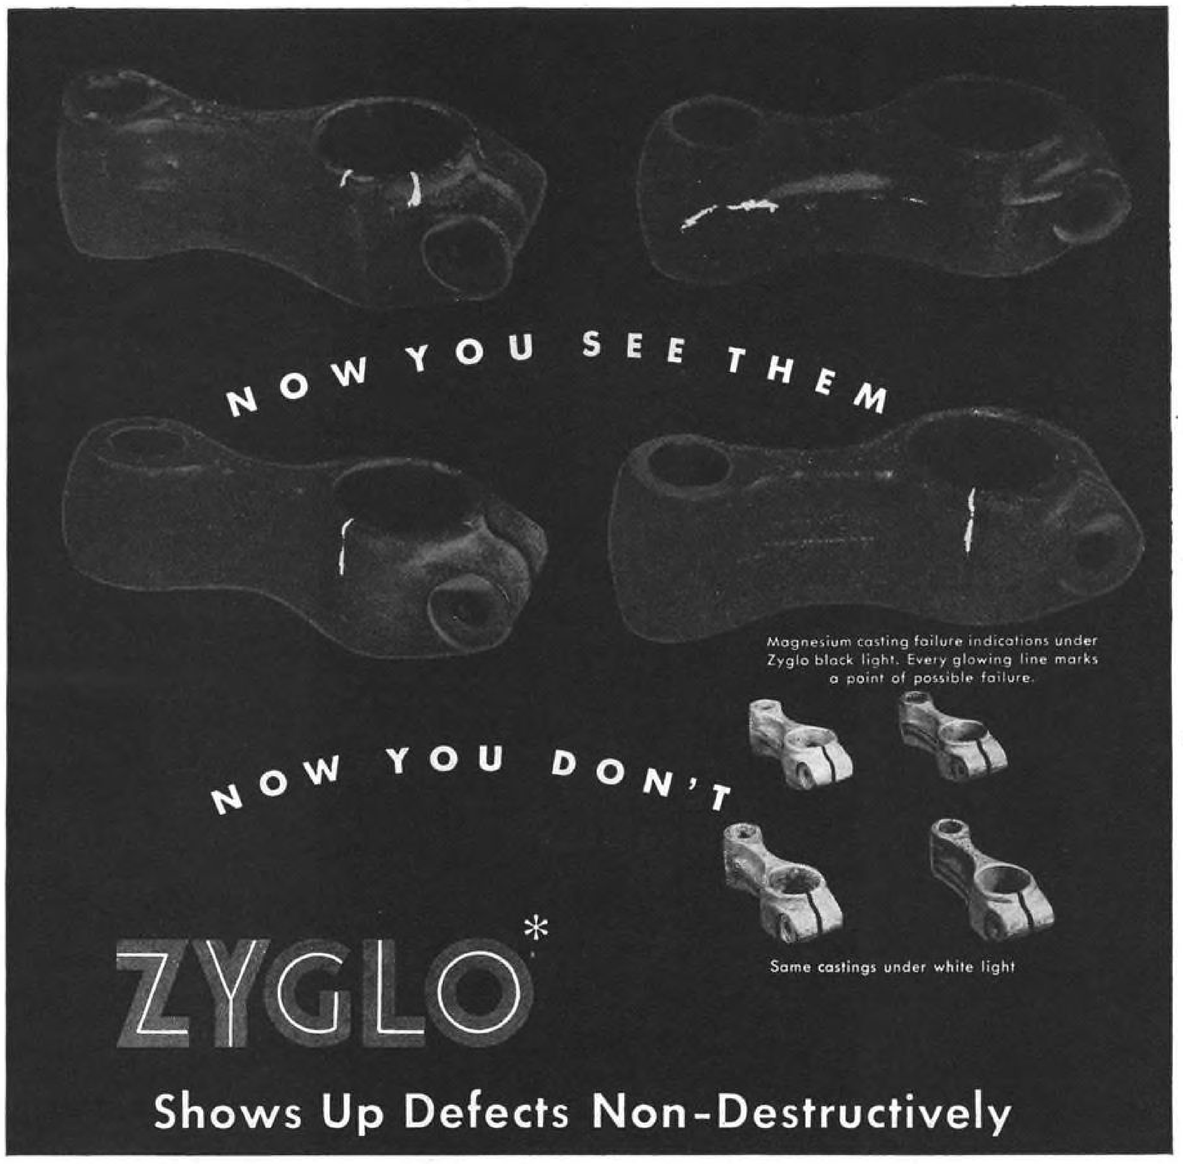

A simple Zyglo inspection under black light reveals cold shuts, shrinkage cracks, porosity, blow-holes and surface cracks with vivid luminous indications—so plainly that defective castings need not slip by. With Zyglo, foundrymen can hold back defective castings before they leave the plant and become troublemakers elsewhere. Zyglo is applicable to all cast materials.

The cast magnesium fittings in the pictures above show typical Zyglo indications of cracks which would probably cause failure.

Check your castings with Zyglo and be sure of the quality of every individual piece.

MAGNAFLUX CORPORATION

MAGNAFLUX CORPORATION
5906 Northwest Highway, Chicago 31, Illinois
New York · Detroit · Dallas · Los Angeles · Cleveland · Birmingham

Pan American World Airways depend on SUNNEN HONING for Accurate Fittings of Bushings Up to 2½"



Yes, you, too, can depend on Sunnen honing to give smooth, accurate fits, because accuracy within .0001" is guaranteed. There are no high spots to wear away, no chatter marks, no blades to get dull. In addition, the Sunnen method of honing produces a super-smooth finish that gives a run-in fit right from the start and produces a longer lasting service job.

In service shops where piston pin holes, connecting rod bushings, etc., are refinished in sets, a whole set can be refinished without changing the setting of the machine. Positive setting of the dial micrometer stop prevents grinding oversize.

Assure smooth, accurate grinding of your small bushings with Sunnen honing. Write for complete details or ask a Sunnen engineer to call.




The coveted Army-Navy "E" waves over the Sunnen plant, evidence of the important part Sunnen equipment is playing in the war effort.



SUNNEN

SUNNEN PRODUCTS COMPANY, 7942 Manchester Avenue, St. Louis 17, Missouri

Canadian Factory: Chatham, Ontario

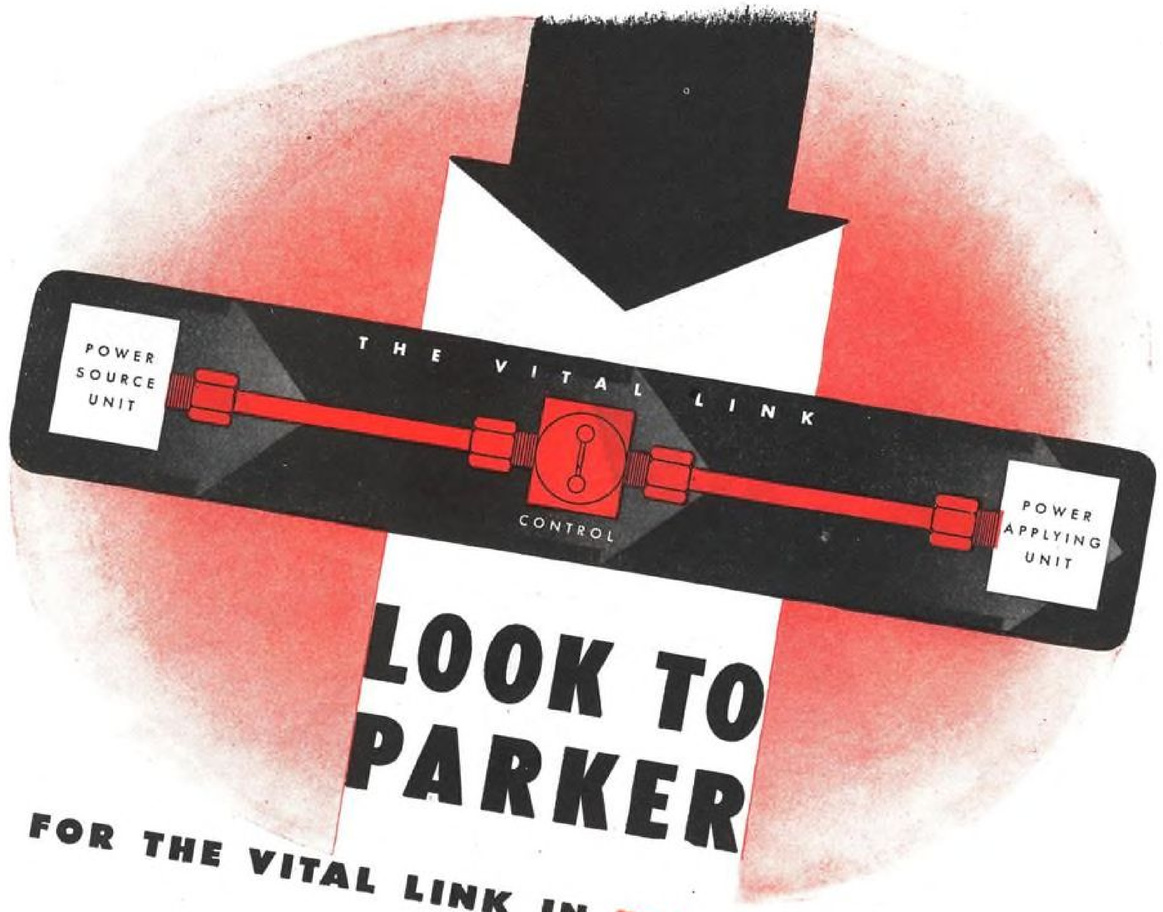

LOOK TO PARKER

FOR THE VITAL LINK IN FLUID POWER

Think of fluid power as the three-link chain: Source—Circuit—Utilization.

The Circuit is the *key link.* It may go around corners and into tight places. It may even be vulnerable. Too often it is just taken for granted.

The success of fluid power depends on the engineering of the Circuit. That is Parker's business.

We do the engineering from design through to installation. We build the valves and fittings and the tools to handle them.

Our specialized know-how distilled from twenty years' experience with Fluid Power System is at your command.

The best way to get this know-how applied to your problem is to ask a Parker engineer. Or write direct to The Parker Appliance Company, 17325 Euclid Ave., Cleveland 12, Ohio.

PARKER SELECTED TO DISTRIBUTE SURPLUS WAR STOCKS OF PRECISION VALVES AND FITTINGS

Recognizing that users of precision valves and fittings would be served best by having war surpluses made available through an organization with broad application experience, Metals Reserve Company has appointed Parker to be a distributing agent. For details on type, quantity, specifications and application of this very large stock, write, wire or telephone

PARKER SERVICE AGENCY
17325 Euclid Avenue Cleveland 12, Ohio
agent for
METALS RESERVE COMPANY

THE PARKER APPLIANCE COMPANY
CLEVELAND · LOS ANGELES



OPERATION TEST

on EMERSON-ELECTRIC AIRCRAFT MOTORS

After rigid tests at numerous stages of manufacture, Emerson-Electric Aircraft Motors, in accordance with specifications, are subjected to the Vibrometer test. Vibration testing is an accurate and practical method of determining balance of all rotating parts in the assembled motor. Here the motor is "floated" by springs and rubber pads and operated under the "eye" of a sensitive light beam Vibrometer, which detects any unbalanced condition.


This is but one of many exacting tests of materials and assemblies which are important in the manufacture of precision-built motors for combat service airplanes.

For full information on Emerson-Electric Aircraft Motors, send for Bulletin X4745.

THE EMERSON ELECTRIC MFG. CO. • ST. LOUIS 3, MO.

Branches: New York • Chicago • Detroit • Los Angeles • Davenport






EMERSON-ELECTRIC AIRCRAFT MOTORS are made for gun turret drives, hydraulic units, fuel pumps, actuators, winterizing units, communication systems—also with built-in gear and magnetic brake.

EMERSON ELECTRIC 406

MOTORS · FANS APPLIANCES

an aircraft . . . FORGING

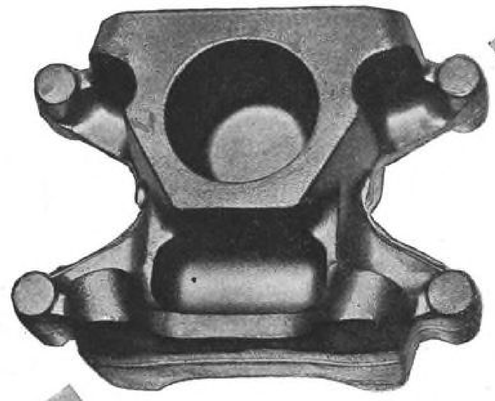

Fuselage Bracket Forging

In Which Maximum Metal Quality Has Been Developed By Forging

Embodying a combination of bosses with depressions, this fuselage bracket forging involves difficult forging operations to direct the grain flow into the several directions necessary to completely fill out all sections of the forging. The development of the *maximum metal quality* inherent in the metal is vital to withstand the stresses this part must survive under service conditions. The correct forging technique is the key to obtaining the maximum strength and toughness. Throughout 31 years of forging production experience, our engineers have utilized, over and over again, all of the known forging techniques; frequently improving a technique in order to achieve the full IMPROVEMENT OF METALS BY FORGING. Design the part to perform its function; then consult one of our forging engineers for suggestions on how to get maximum metal quality by forging it.



This Reference Data Book presents some new ideas on forgings and their applications in the aircraft industry. Copies available to engineers metallurgists, and executives.

DROP


THE STEEL IMPROVEMENT & FORGE CO.

FORGINGS 960 East 64th Street CLEVELAND, OHIO

Attention! AIRCRAFT ACCESSORY DEALERS!

Here's Another Firestone FIRST...

A New Franchise *that Builds Your Business and Assures* MORE PROFIT!

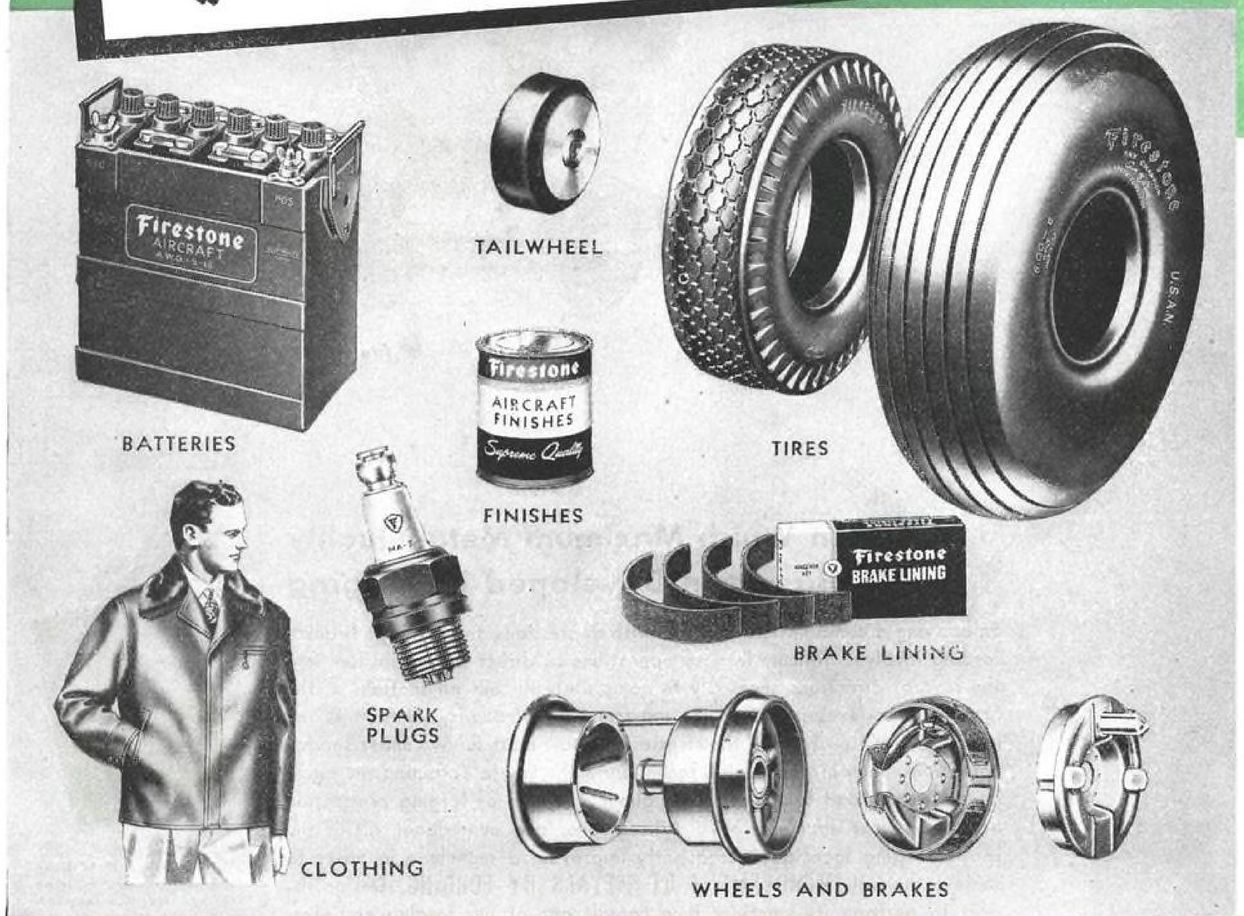

FOR many months Firestone, while producing for war, has also been preparing for peace. And as a first step in its postwar plans, Firestone announces a new franchise for aircraft accessory dealers which provides them with a wide variety of high quality merchandise that their customers want and need — tires, tubes, wheels, brakes, brake lining, batteries, spark plugs, finishes and many other products for their planes — jackets, gloves, sun glasses and numerous other items for themselves. And after victory, many other products may be added to the line — radio transmitters and receivers, radio direction finders, binoculars, field glasses, cameras and other equipment that private flyers will require. So sign up NOW with Firestone, the *first* Company to provide aircraft accessory dealers with a complete franchise. For full information, write or wire — or phone HEmlock 1671, Akron 17, Ohio.

For the best in music, listen to the "Voice of Firestone" with Richard Crooks and Gladys Swarthout and the Firestone Symphony Orchestra conducted by Howard Barlow every Monday evening over NBC network.

Copyright, 1944, The Firestone Tire & Rubber Co.

Here's the franchise that means bigger profits for you!

Firestone
AIRCRAFT
DEALER FRANCHISE

AIRCRAFT TIRES and TUBES
BATTERIES – BRAKE LINING – SPARK PLUGS
WHEELS, ACCESSORIES and SUPPLIES

Firestone AIRCRAFT DEALER FRANCHISE

AGREEMENT between Franchise Dealer.....
of .....
The Firestone Tire & Rubber Company, covering Firestone Aircraft products, dated.....

1. Company grants Franchise Dealer the right to sell Firestone Aircraft products—conditions shown below. In consideration, Franchise Dealer agrees to buy from Company, and maintain, stock of Firestone Aircraft products, to vigorously merchandise them, and to conspicuously display Firestone signs.
2. Franchise Dealer shall be entitled to Company's regular Dealer Prices in force at time any order is shipped. If prices advance before shipment, Dealer may cancel order.
3. Company agrees in case of a reduction in its Dealer Prices concurrent with a similar reduction in its suggested consumer prices, to rebate the Franchise Dealer by merchandise credit, the difference between the former Dealer Prices and the reduced Dealer Prices on Franchise Dealer's net purchases of all Firestone Aircraft tires and tubes, made from Company at the former Dealer Prices during the thirty days prior to the date such price revision becomes effective.
4. Franchise Dealer accepts all responsibility for the placing and condition of any signs furnished by Company and agrees to hold Company harmless by reason of the use of such signs. Upon termination of this Agreement, Franchise Dealer agrees to surrender to Company all signs and other property belonging to Company and to discontinue immediately the use of Company's name. Company shall have the right to enter upon Franchise Dealer's premises and to repossess or remove all signs showing a representation of Firestone.
5. The conditions upon which this Agreement is made are recited in detail on the back of this sheet, with the same values and effect as if fully set forth in the body of this Agreement.

This AGREEMENT is not subject to oral change. It is to be construed under the laws of the State of Ohio, and becomes effective when signed by the Company's District Manager, continuing in effect, unless terminated by either party on thirty days written notice to the other, or, it may be cancelled immediately upon violation of its terms.

THE MARK OF QUALITY AND SYMBOL OF SERVICE

THE FIRESTONE TIRE & RUBBER COMPANY, Akron, Ohio.

By.....
District Manager

ACCEPTED:

.....
Franchise Dealer


Firestone AIRCRAFT COMPANY

TIRES, TUBES, WHEELS, BRAKES, AIRSPRING LANDING GEARS, BATTERIES, VELON SEAT COVERINGS, FOAMEX CUSHIONING, FUEL AND OIL CELLS, BUSHINGS

AKRON, OHIO; MAKERS OF SPARK PLUGS, HOSE CLAMPS AND MANY OTHER AIRCRAFT SUPPLIES

WESTON

Aircraft Instruments

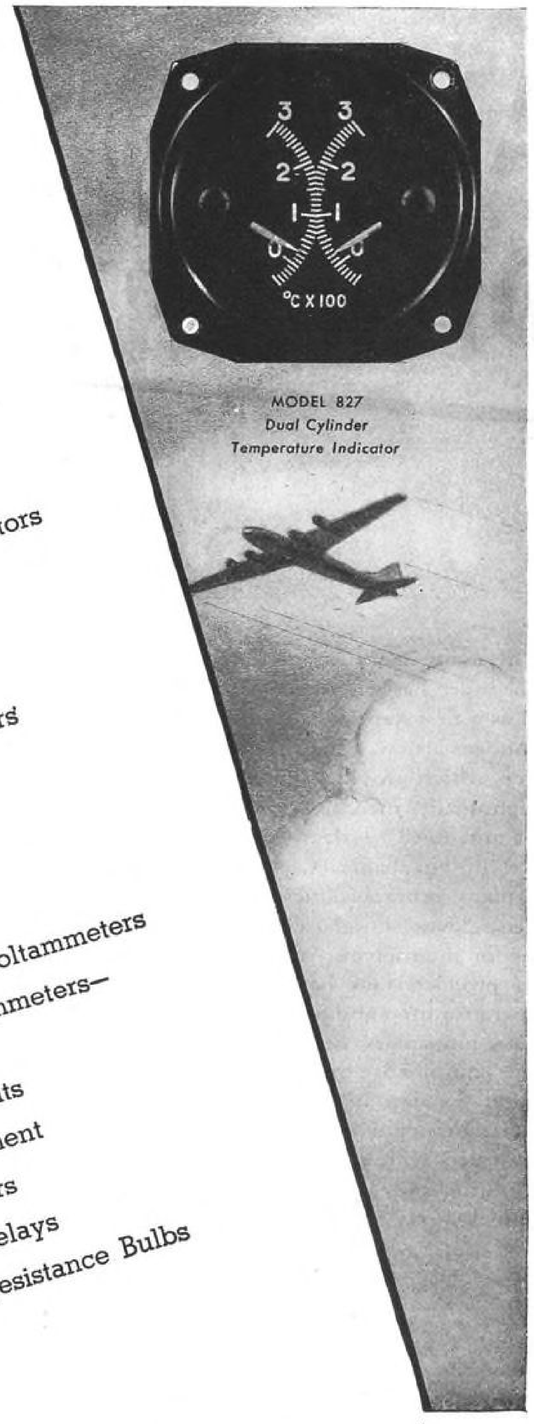

Cylinder Temperature Indicators (Single & Dual)
Exhaust Temperature Indicators (Single & Dual)
Bearing Temperature Indicators (Single & Dual)
Carburetor Air Temperature Indicators
Oil Temperature Indicators
Free Air Thermometers
Tachometers (Electrical)
Super-Charger Speed Indicators
Flap Position Indicators
Radio Compass Indicators
Blind Landing Indicators
Frequency Meters
Ammeters—Voltmeters—Voltammeters
Milliammeters—Volt-Ohmmeters—Wattmeters
Radio Panel Instruments
Radio Testing Equipment
Radio Tube Analyzers
Rotary Switches—Relays
Thermocouples—Resistance Bulbs

Laboratory Standards . . . Precision DC and AC Portables . . . Instrument Transfomers . . . Sensitive Relays . . . DC, AC, and Thermo Switchboard and Panel Instruments.

WESTON

Specialized Test Equipment . . . Light Measurement and Control Devices . . . Exposure Meters . . . Aircraft Instruments . . . Electric Tachometers . . . Dial Thermometers

WESTON ELECTRICAL INSTRUMENT CORP., 685 Frelinghuysen Avenue, Newark, N. J.

When it's baggage instead of bomb-load

★ Not too far distant is the day when America's giant birds of the air will be built to accommodate commercial cargoes and passengers in place of present Axis-smashing armaments. It is a day to which we all look forward . . . for which we plan with an eye to keeping America supreme in the skies.

Here at AFCO, plane builders will continue to find the co-operation so necessary to delivery of fine fittings to their assembly lines. Airports will have a reliable source for the replacement fittings required to service the peacetime air fleets. Designers and engineers will discover capable, intelligent assistance in supplying special fittings for special jobs. All will appreciate how AFCO Fittings are perfectly reamed, concentric to outside threads by a few thousandths . . . the threads so clean and sharp . . . the finish so smooth and unmarked. They will find satisfaction in working with men who have specialized for years in the production of quality aircraft fittings.

It is not too early to make arrangements now for your postwar fittings . . . to talk over with AFCO the fittings problems that will be yours and ours when aviation turns again to peaceful pursuits . . . when it's *baggage* instead of *bomb-load*.



AFCO *Fittings*

NEW "AN" TUBE, PIPE AND HOSE FITTINGS

FITTINGS OF QUALITY FOR PLANES OF WAR AND PEACE

The Aircraft Fitting Company • 1400 East 30th Street • Cleveland 14, Ohio

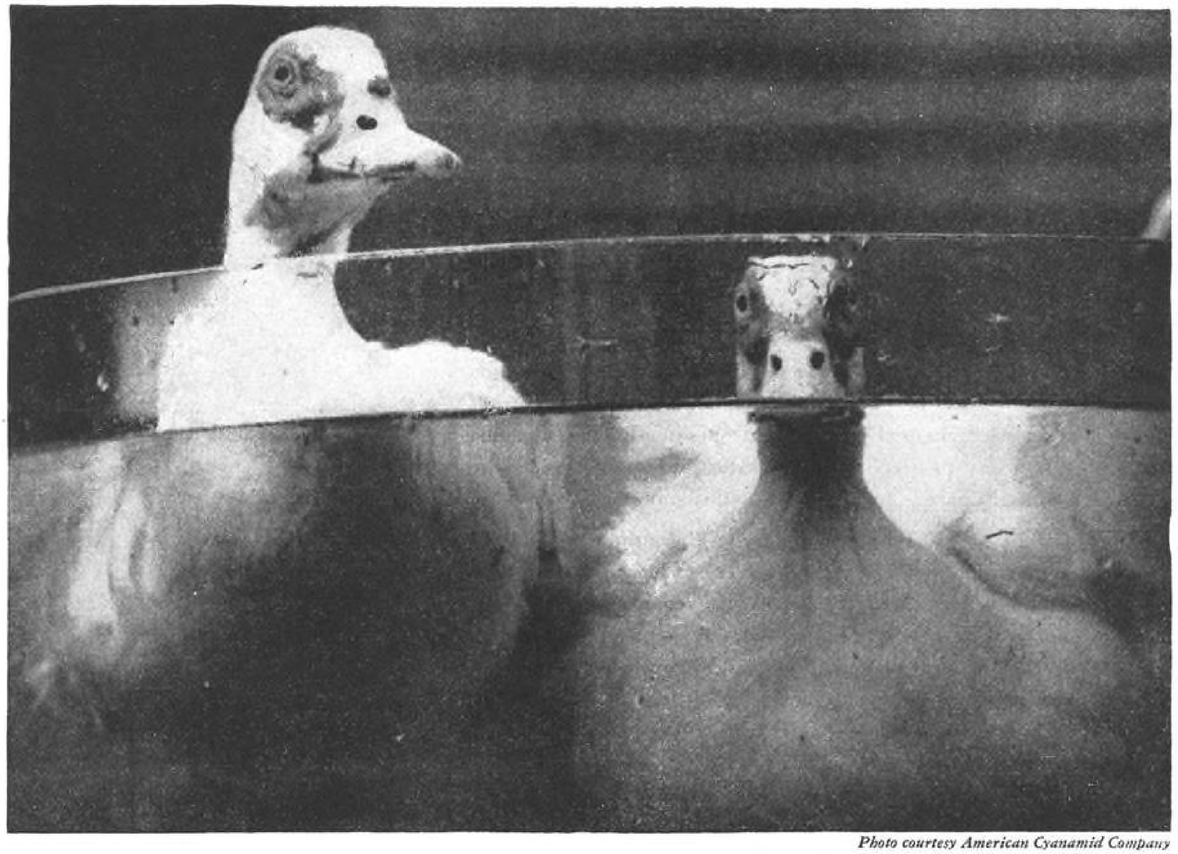


Photo courtesy American Cyanamid Company

SCUTTLED DUCKS

THOSE poor ducks were scuttled by the use of a wetting agent that allowed their feathers to absorb water. They couldn't stand the extra weight and sunk right up to their surprised and sad-looking faces—a bad situation.

Extra weight is bad for plane performance, too, affecting speed, range and load. Yet there are many resilient parts —hose, diaphragms, packings, seals, gaskets, accumulator bags—that can absorb petroleum products and so get heavier than called for in original design. Or petroleum products may cause swelling—reducing capacities of hose, accumulator bags and other parts.

Fortunately Hycar can lick this problem of absorption and swell. Light to begin with, Hycar's oil resistance *keeps* it light and maintains dimensional stability.

This partial list of Hycar's properties—all highly important in aircraft applications—will show you why there is no other material directly comparable to Hycar.

15% to 25% lighter than many other synthetic rubbers

Closely controlled oil swell to insure dimensional stability of parts

Operating range from —65° to 250° F.

Abrasion resistance 50% better than natural rubber

Minimum tendency to cold flow after taking initial deformation, even at elevated temperatures

If, in your product, resilient parts are exposed to petroleum products, Hycar is the material to use. And if you need help in solving your individual problems just write our Technical Service Staff. *Hycar Chemical Company, Akron 8, Ohio.*

Hycar

Reg. U. S. Pat. Off.

LARGEST PRIVATE PRODUCER OF BUTADIENE TYPE

Synthetic Rubber

Free—write for your copy of the new pocket-size Hycar Glossary of commonly used synthetic rubber terminology.


RBC

NEEDLE BEARING

Offer

ECONOMY

From Every Point of View

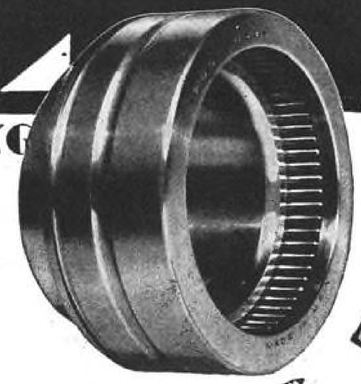

CLUES to better Bearing Performance

HIGH LOAD CAPACITY

LIGHT WEIGHT

SMALL SIZE

UNIT CONSTRUCTION

ECONOMY

WEAR RESISTANCE

CORRECT ALIGNMENT

ALL TYPES— Full Range of Sizes

PRECISION

High Carbon Alloy Bearing Steel

ELIMINATION OF FRICTION SILENCE

ECONOMY OF SPACE

Minimum overall dimensions of the R B C CYCLOPS Needle Bearing pictured here, and the 20th CENTURY Needle Bearing as well, results in smaller housings thereby saving metal and streamlining machine tools and modern portable and stationary equipment of all types.



$$\frac{\text{Capacity}}{\text{Space}} = \text{Maximum for Needle Bearings}$$

GREATER CAPACITY PER DOLLAR

The large-capacity, small-size ratio of these outstanding bearings enables the engineer and designer to select smaller dimension bearings that in most cases still provide double the load-carrying capacity of the better roller bearing of five years ago. This is economy in the truest sense.

$$\frac{\text{Capacity}}{\text{Cost}} = \text{Maximum for Needle Bearings}$$

ECONOMY OF MAINTENANCE

Use of R B C Needle Bearings means practically no maintenance cost. Their ability to function efficiently under severe operating conditions eliminates shutdown of equipment. Management demands continuous production and Plant Engineers will praise Engineers and Designers who specify trouble-free R B C Needle Bearings in their equipment.


$$\frac{\text{Service}}{\text{Maintenance Cost}} = \text{Maximum for Needle Bearings}$$

R B C's ENGINEERING STAFF WILL HELP YOU IN SELECTING THE RIGHT BEARING, AND IN FOLLOWING OUT THE CORRECT BEARING PROCEDURE. LET US KNOW YOUR PROBLEMS.

ROLLER BEARING CO. OF AMERICA

TRENTON, NEW JERSEY

Why we pull Relay Screws apart

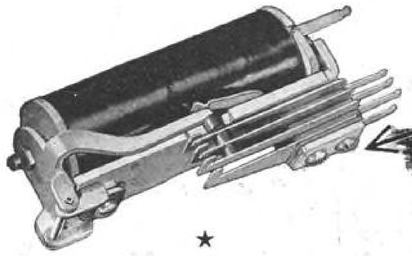


★

Vibration, humidity and extremes of temperature can be bitter enemies of relay dependability. That is why the contact springs on Automatic Electric relays are clamped by special screws, which exert the necessary pressure without breaking or stretching. Such screws must meet the exacting tensile tests prescribed by our designers.

These tests, and scores of others like them, are vital contributions to the long life and dependability for which Automatic Electric relays are famed.

When you need relays or other electrical control devices, take advantage of our unique fund of design data and experience. First step is to write for the Automatic Electric catalog. Then, if you need sound technical advice on your problem, call in our field engineer. He will be glad to put his knowledge to work for you.

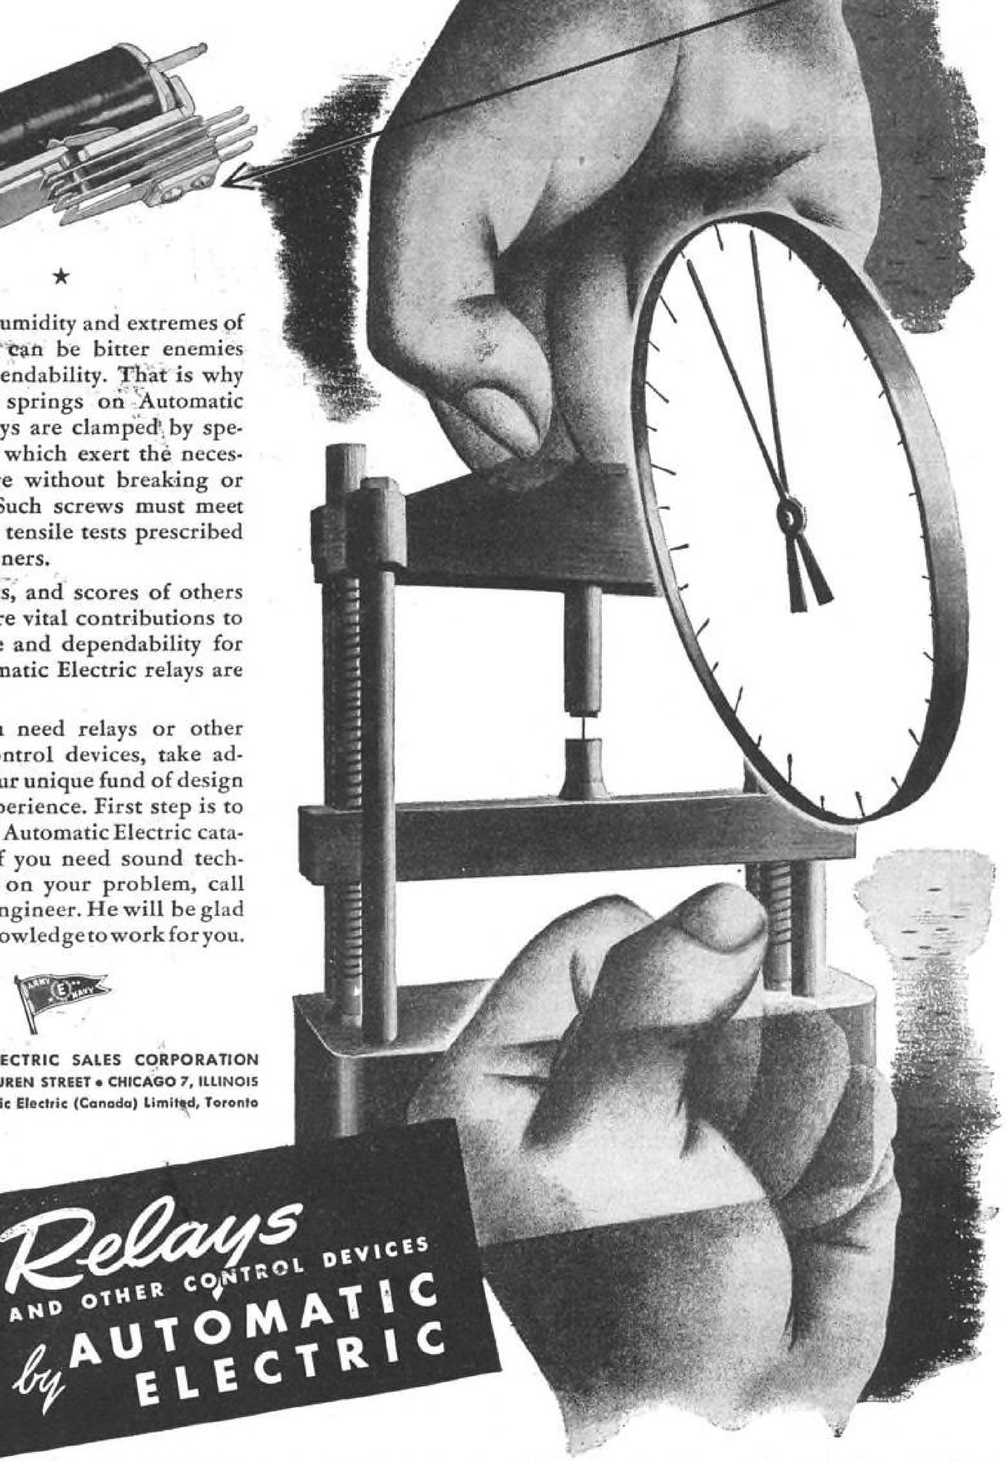

AUTOMATIC ELECTRIC SALES CORPORATION
1033 WEST VAN BUREN STREET • CHICAGO 7, ILLINOIS
In Canada: **Automatic Electric (Canada) Limited, Toronto**

Relays AND OTHER CONTROL DEVICES *by* AUTOMATIC ELECTRIC

PARTS AND ASSEMBLIES FOR EVERY ELECTRICAL CONTROL NEED



Not Very Big . . . but
PLENTY "MEAN"

You can't always judge the *toughness* of a fire by its size. Some relatively small fires fight back so viciously . . . hang on so stubbornly . . . that they are harder to extinguish than many big blazes.

Extinguished in 20 Seconds

Here's a demonstration fire in which no punches are barred. Not very big. Just a broken flange on a pipe line, spraying gasoline into the air . . . 10 gallons a minute, feeding a fast-spreading flaming pool. *No sheltering walls and no large surfaces on the flange to retain or make easier* the job of the extinguishing medium. Specifications for a fire that's *very* tough to handle.

First picture above shows fire after gasoline had been allowed to spray for a full minute. Yet, Cardox CO_2, discharged at the rate of 700 pounds per minute from a single Cardox nozzle (as shown in middle picture) extinguished this fire in 20 seconds.

Protecting *hard-to-handle* hazards is the job of Cardox Fire Extinguishing Systems engineered for the specific hazards and conditions at hand, and of Cardox Fire Trucks that put swift wheels under *tons* of carbon dioxide. Thanks to their distinctive ability to provide *mass* application of Cardox CO_2, Cardox Systems and Cardox Airport Fire Trucks have taken over a roster of the toughest fire assignments in scores of war industries . . . and licked them to a standstill.

Enhanced CO_2 Performance

In Cardox Systems and Fire Trucks fast-acting, non-damaging carbon dioxide is given enhanced extinguishing performance because, as controlled and applied, Cardox CO_2: (1) Has uniform extinguishing characteristics regardless of plant or atmospheric temperatures; (2) Is available in ample quantity for application at high rate; (3) Provides high CO_2 "snow" yield for increased cooling effect; (4) Achieves effective projection through relatively great distances.

Write on company letterhead for Bulletin No. 3114, containing data on Cardox Engineered Systems and Mobile Equipment applicable to protecting oil industry fire hazards.


CARDOX CORPORATION
BELL BUILDING • CHICAGO 1, ILLINOIS
District Offices in New York • Boston • Washington
Detroit • Cleveland • Atlanta • Pittsburgh
San Francisco • Los Angeles • Seattle

BUY WAR BONDS



CARDOX
CO_2 FIRE EXTINGUISHING SYSTEMS

HIGH *in Performance*
LOW *in weight*

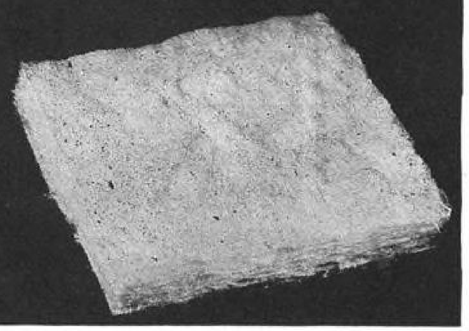

FIBERGLAS* XM-PF
Aircraft Insulation

Only by *seeing, feeling, weighing* and *flexing* this new insulation can you realize how radically different it is from other insulations; also why every ounce available has been going into U. S. Military Aircraft.

Fiberglas XM-PF Insulation is made up of inert, inorganic material —glass in the form of very fine fibers bonded into a flexible mat form. It is easy to handle and fabricate. It requires no stitching or felting to maintain its form and shape, even under extreme vibration. And it weighs as little as *one pound* per cubic foot, while providing an optimum of insulating effect.

This new material has a merit factor of over 80 as *acoustical* insulation when properly installed. This, combined with its light weight and durability has made it ideal for the acoustical treatment of pilots', radio operators' and navigators' compartments in aircraft.

Its *thermal* uses in aviation include the insulation of hot-air ducts and fittings on aircraft, also the insulation of cargo and troop transport compartments. Being made of glass, the fibers will not rot or burn. Equally important, this insulation absorbs a negligible percentage of moisture under extremely humid conditions.



If you are not already familiar with Fiberglas XM-PF Aircraft Insulation, it will pay you to investigate its many advantages. Why not get in touch with the branch office nearest you? Or you can write to *Owens-Corning Fiberglas Corporation, 1891 Nicholas Building, Toledo 1, Ohio. In Canada: Fiberglas Canada Ltd., Oshawa, Ontario.*

OTHER AIRCRAFT USES OF FIBERGLAS



AIRCRAFT BLANKETS

Another type of Fiberglas thermal insulation, these fireproof blankets (known as Design No. 3) are made of Fiberglas insulating wool, Type N, faced with Fiberglas cloth and stitched with glass thread. Available in 1½ lb. and 3 lb. densities, they are extensively used to insulate gasoline heater exhausts, heat exchanger ducts, other high-temperature pipes, etc.



FIBERGLAS COATED FABRICS

The use of Fiberglas cloths as base fabrics for coating with natural or synthetic rubbers, vinyl compounds and other coating materials, provides a finished material having new and unusual qualities—great dimensional stability and strength under the most severe conditions of humidity, temperature and hard usage in combat. Widely used in the fabrication of gun bore sight screens, insulation covering, flexible connections, bunks, fuel cells, distillate tanks, many other items.



FIBERGLAS-REINFORCED PLASTICS

Made by combining certain low-pressure resins with Fiberglas—glass in the form of fine fibers—these materials provide great strength with light weight; exceptional ability to absorb shock; dimensional stability under moisture changes. These and other properties of this amazing new structural material are described in a booklet of reprints of articles which appeared recently in "Modern Plastics". Write for your copy.




TAPES

Another all-glass product—woven from Fiberglas yarns. While extensively used for insulating motors, generators and other electrical equipment, many other applications have been found for these durable, incombustible tapes in aviation—such as covering of thermal insulations on hot air ducts, ties for removable insulating pads, etc.

FIBERGLAS ..A BASIC MATERIAL

*T. M. Reg. U. S. Pat. Off.



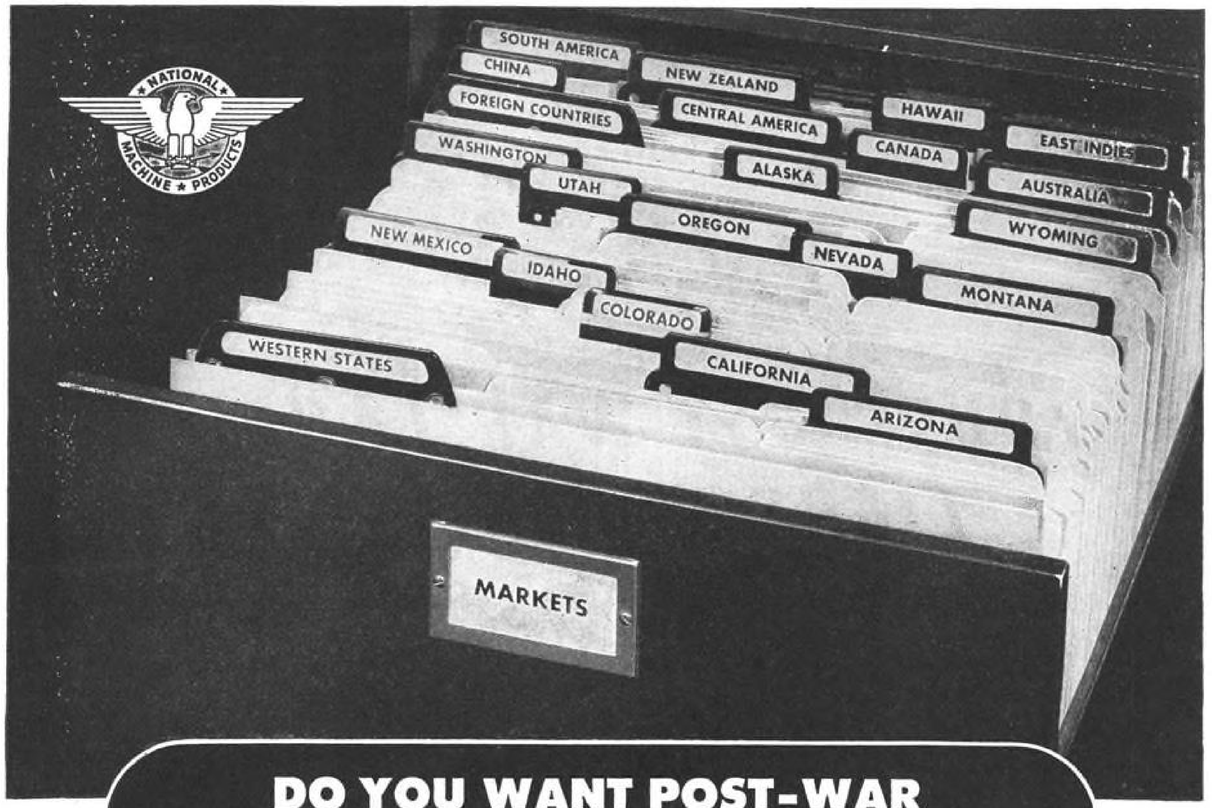

DO YOU WANT POST-WAR PRODUCTION FOR THESE MARKETS?

TO: Eastern Manufacturers
SUBJECT: Post-War Production

WE HAVE PRODUCTION FACILITIES EQUIPPED TO SERVE WESTERN AND EXPORT MARKETS. We can handle your post-war production for western and export sales. Interested in straight manufacturing contract, license to manufacture and sell or alternative arrangement. Our plant is modern, up-to-date, properly balanced and thoroughly adequate.


WRITE FOR "A MODERN PLANT AT WORK."

INVENTORS OR ENGINEERS

Do you have a metal product you want to get on the post-war production calendar? Is it patented or patent pending? Send us clear sketches and a written description. We may have an interest in common. Your rights will be scrupulously respected.

NATIONAL MACHINE PRODUCTS
150 W. SLAUSON AVE.
LOS ANGELES 3, CALIF.

PRECISION CRAFTSMEN

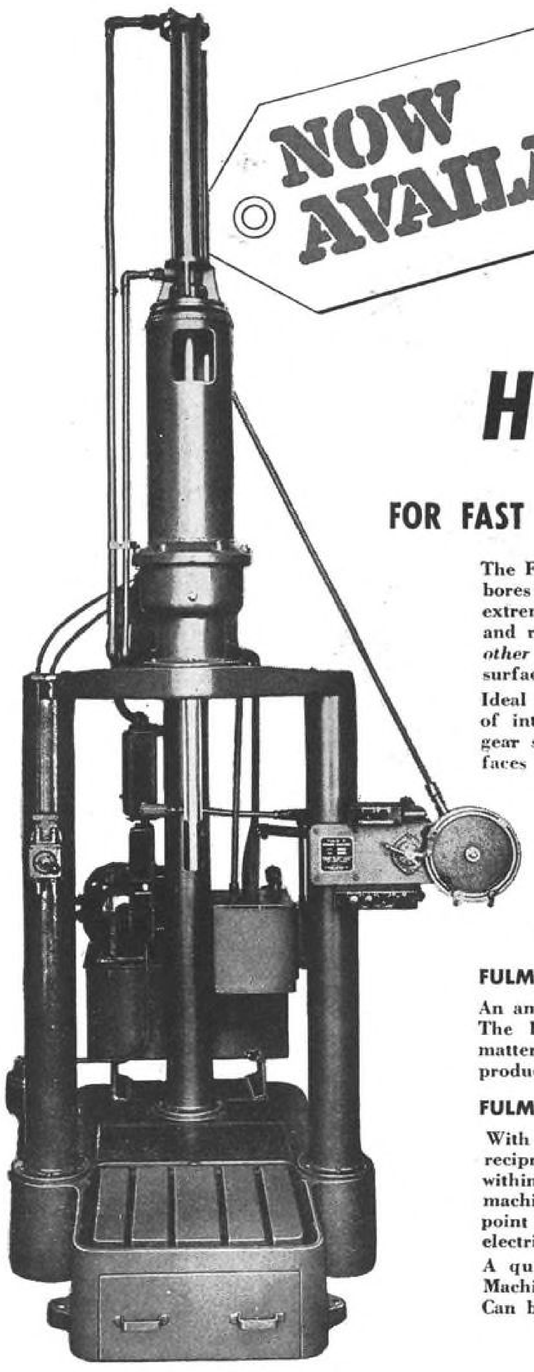

NOW AVAILABLE...

Fulmer Honing Machine

FOR FAST PRODUCTION AND PRECISION ACCURACY!

The Fulmer Honing Machine produces round, straight, smooth bores to working tolerances as small as .0002". It is an extremely flexible machine. Due to a wide range of spindle and reciprocating speeds, it removes material *faster than any other known method* for a comparable degree of accuracy and surface finish.

Ideal for finishing aircraft cylinders, connecting rods, all types of internal combustion cylinders, supercharger parts, landing gear struts, recoil cylinders—wherever superfine cylinder surfaces and extreme accuracy are required.

ALL CONTROLS WITHIN EASY REACH

The Fulmer patented control system places all controls at "floor level" in the front of machine, within easy reach of operator. Stroke setting, hone withdrawal, "short stroking," changes in spindle or reciprocating speeds can be handled instantly from operator's station.

FULMER EXCLUSIVE SUMP SYSTEM

An ample supply of coolant is carried in base of the machine. The Fulmer exclusive sump system permits cleaning solid matter in coolant system quickly, without loss of coolant or productive time.

FULMER PATENTED "STOP AND DWELL" SYSTEM


With the Fulmer patented "Stop and Dwell" system, the reciprocating spindle can be hydraulically stopped at any point within stroke capacity of machine, without shock or impact to machine or work. Spindle is "locked in" at such stopping point and can be held there in definite second increments, electrically timed.

A quality machine in every respect, the Fulmer Honing Machine will deliver maximum output in continuous operation. Can be supplied in different models to suit your needs.

Write Today for Complete Information

C. ALLEN FULMER CO.
1225 FIRST NATIONAL BANK BLDG., CINCINNATI 2, OHIO

FULMER
PRECISION AIRCRAFT SERVICE EQUIPMENT
ROD BORERS · HONING MACHINES · PISTON RING LAPPERS · SPECIAL MACHINERY

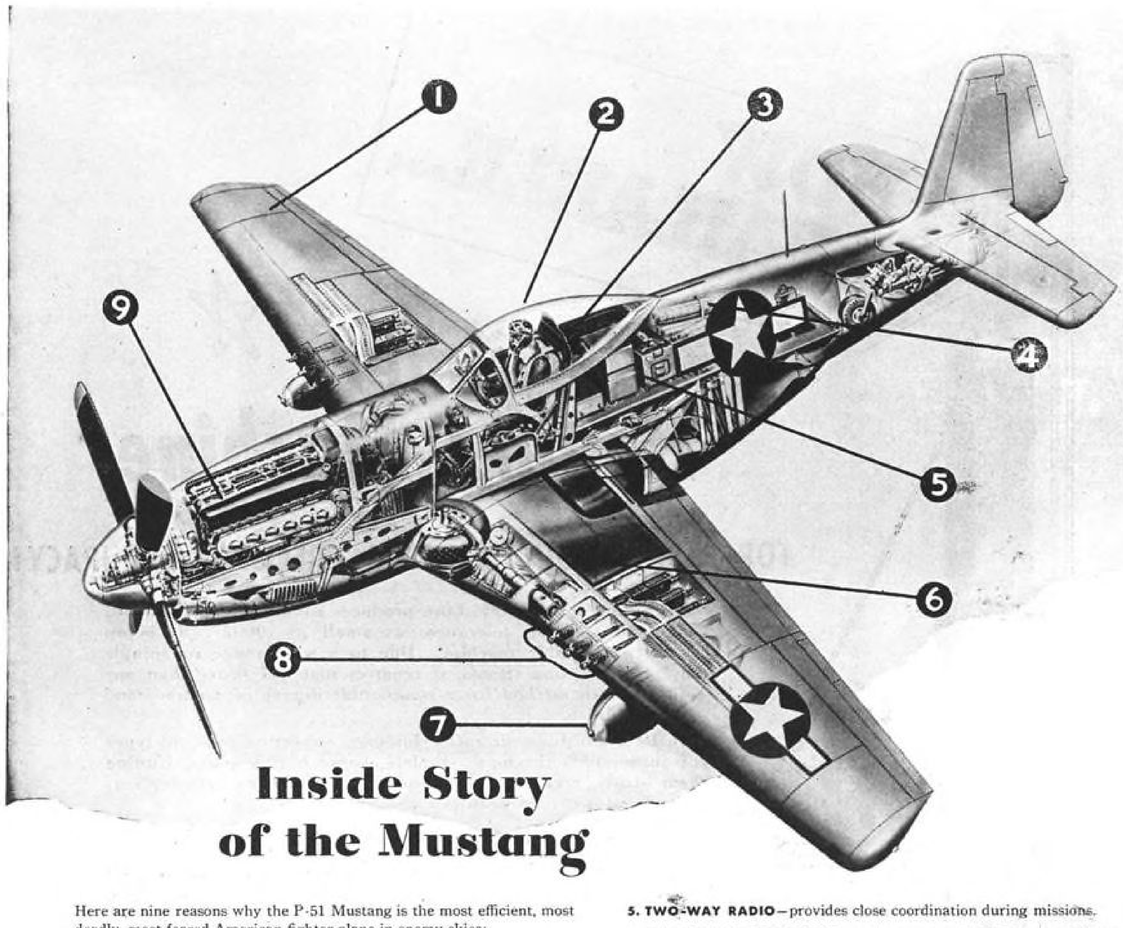

Inside Story of the Mustang

Here are nine reasons why the P-51 Mustang is the most efficient, most deadly, most feared American fighter-plane in enemy skies:

1. **REVOLUTIONARY DESIGN**—laminar-flow super-speed wing.
2. **NO BLIND SPOTS**—full vision cockpit enclosure.
3. **ARMOR PLATE**—this bullet-proof seat back protects Mustang pilots.
4. **FIGHTS EIGHT MILES UPSTAIRS**—these tanks provide oxygen for pilot.
5. **TWO-WAY RADIO**—provides close coordination during missions.
6. **SELF-SEALING GAS TANKS**—an important safety factor in combat.
7. **BOMB LOAD**—1000 pounds under each wing.
8. **DEADLY FIREPOWER**—six .50 cal. machine guns, three in each wing.
9. **SPEED—OVER 425 MPH**—1520 HP supercharged engine and automatic, variable pitch propeller.

North American P-51 Mustang Fighter




BONDS bought these planes.
WASTE FATS helped arm them.
WASTE PAPER helped ship them.
GASOLINE flies them.
WILL YOU help deliver the next squadron?

Unmatched in speed, ceiling and combat radius, Mustangs fight from Burma to Berlin

North American Aviation *Sets the Pace*

PLANES THAT MAKE HEADLINES... *P-51 Mustang fighter (A-36 fighter-bomber), B-25 and PBJ Mitchell bomber, AT-6 and SNJ Texan combat trainer, and the B-24 Liberator bomber. North American Aviation, Inc. Member, Aircraft War Production Council, Inc.*

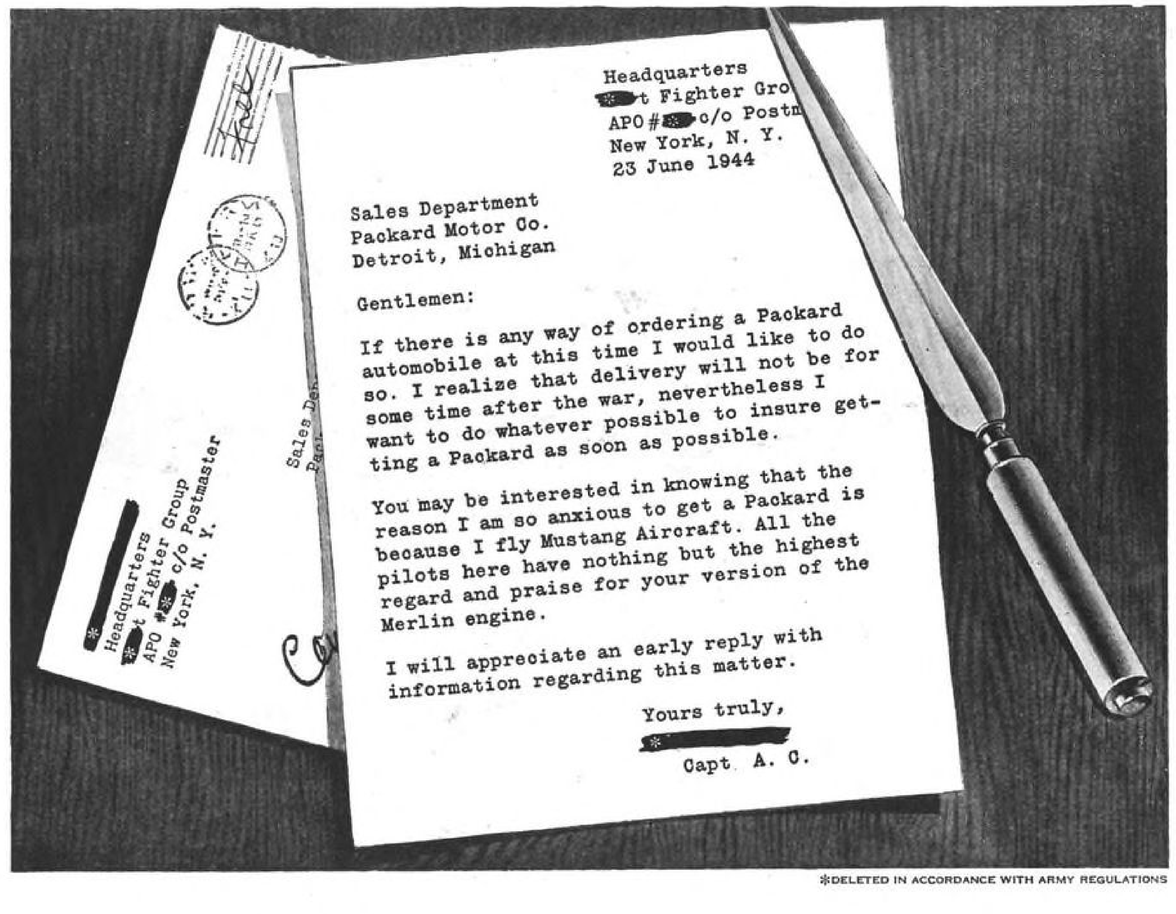

*DELETED IN ACCORDANCE WITH ARMY REGULATIONS

A letter we prize . . . from a Mustang pilot overseas

We're grateful to the pilot who took time out to write this letter.

For it's always welcome news to hear—right from the boys who fly 'em—that Packard-built Rolls-Royce engines are doing a good job in this war.

Today, we're concentrating on keeping these aircraft engines—and Packard marine engines for PT boats—flowing to the fighting front to help shorten the war.

But, as soon as the progress of the war permits, we'll swing back into car production again—and we have already told our pilot friend that he will get his Packard "as soon as possible."

He can be certain—and so can you—that it will be a car worth waiting for . . . built to the same high standards as that Packard-built Rolls-Royce engine he's flying today.

★ ASK THE MAN WHO OWNS ONE ★


Mustang Fighter


Warhawk Fighter


Hurricane Fighter


Mosquito Bomber


Lancaster Bomber

Packard


Navy PT Boats


Army Rescue Boats

PRECISION-BUILT POWER



● *Built by Boeing Aircraft Co., the B-29 has four SKF-equipped engines, the products of The Wright Aeronautical Corp.*

Superfortresses do it on SKF's



SKF

BALL AND ROLLER BEARINGS

Surprise package for the enemy, the B-29 Superfortress with its wingspan of 141.2 feet, length of 98 feet, and height of 27 feet.

On its 300-mile-per-hour forays over Burma and Japan, its four 2200 h.p. 18-cylinder, radial air-cooled Wright Cyclone engines never let it down.

Neither do its SKF Bearings taking the impulses of the cylinders on the crankshafts of these mighty power plants . . . nor its SKF's on their other vital locations.


Where the effectiveness of long-distance bombing missions is measured by mechanical efficiency, SKF Bearings are an important part of the picture—always.

5651

SKF INDUSTRIES, INC. • FRONT ST. & ERIE AVE. • PHILADELPHIA 34, PA.

Greer for Field Carrier or Factory


HYDRAULIC TEST MACHINES

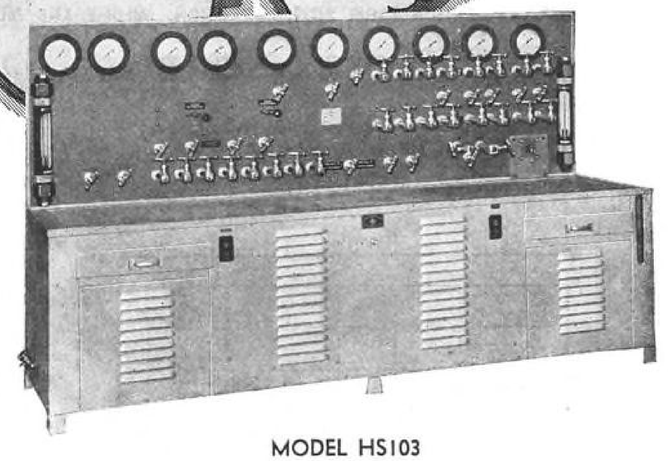

MODEL HS103

✓ *Fill*
✓ *Filter*
✓ *Check*

AIRCRAFT HYDRAULIC SYSTEMS DEVICES AND COMPONENTS

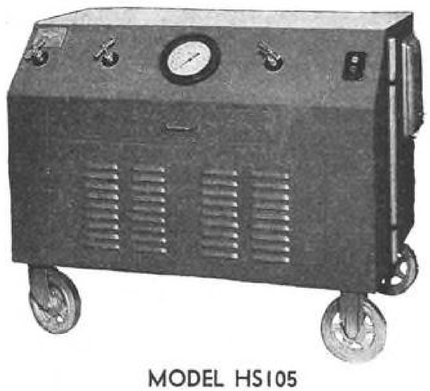

MODEL HS105

ON flying fields, aircraft carriers and in factories all over the world, Greer Hydraulic Test Machines provide accurate, thorough ground inspection under flight conditions.

The Greer standard line comprises electric or gasoline-powered portable models developed specifically for testing hydraulic systems and components on the field or assembly line, and production models for factory inspection, operational testing and research work. Greer Test Machines also fill the system, filter the hydraulic fluid and precharge accumulators, shock struts, and emergency air systems with compressed air.

Greer engineers, who pioneered the application of hydraulics in the aircraft industry, are available for consultation regarding any standard or special test equipment to meet your requirements. Write or phone us your problem.

GREER HYDRAULICS, INC., 39 West 60th Street, NEW YORK 23, N. Y.

The WHY and HOW

of **DAVISON DEHYDRATED PACKAGING**


FOR PROTECTION FROM RUST, CORROSION, MILDEW AND MOLD

using **PROTEK-SORB** *silica gel*★

Protek-Sorb silica gel is chemically inert . . . hard, rugged material . . . gives off no corrosive or injurious compounds as it becomes saturated with water vapor.



Protek-Sorb silica gel absorbs moisture and keeps the R.H.** within the package well below 30%.

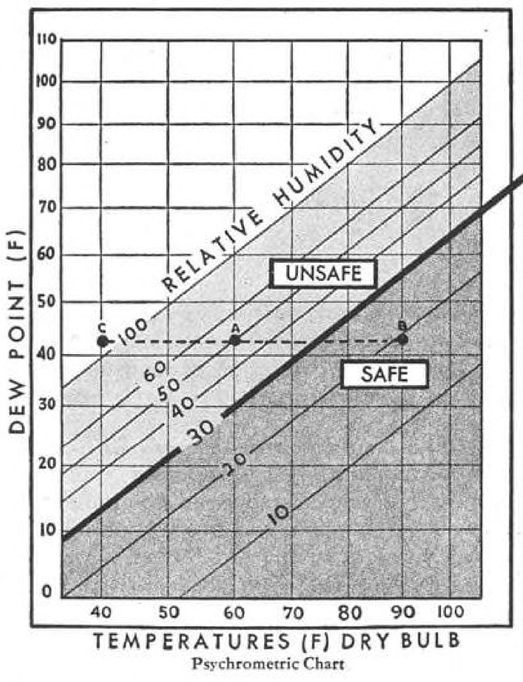

Psychrometric Chart

**Relative Humidity (R.H.) is not an expression of the absolute moisture content of air; R.H. expresses the moisture content as a percentage of saturation at the existing temperature. Therefore R.H. is a function of temperature as well as moisture content.

Q: What causes rust and corrosion?

A: Atmospheric oxygen coming in contact with an exposed metal surface where the R.H. is above 30%—thus moisture and temperature enter into the reaction.

Q: What is the best way to AVOID rust and corrosion in a package?

A: Keep the R.H. within the package well below 30% and the cause is eliminated.

In Davison Dehydrated Packaging the item is sealed in a moisture-vapor-proof barrier together with a predetermined amount of Protek-Sorb silica gel.

The Protek-Sorb reduces the R.H. well below the danger line.

Moisture-vapor-proof barriers alone are not enough, without Protek-Sorb to remove entrapped moisture they may even accelerate rust and corrosion by becoming humidifiers.

Suppose an item were sealed within a barrier at 90°F., together with air having a R.H. of 20%. (B on chart). For the time being the item would be "safe." But if the sealed package cooled down to 60°F. (A on chart) the moisture in the package would be the same, but the R.H. would be 50%—unsafe. If the package cooled down to 40°F. the R.H. would pass 100% and there would be actual condensation.

With the correct amount of Protek-Sorb silica gel sealed in the package, the R.H. will always be well below the danger point . . . no matter what temperature changes the package may experience. The item will be SAFE from rust corrosion, mildew or mold.

Use Protek-Sorb silica gel, the silica gel made especially for Davison Dehydrated Packaging, and be SAFE.

Consult us on your packaging problems.

*REG. T.M. U.S. PAT. OFF.


THE DAVISON CHEMICAL CORPORATION

BALTIMORE 3, MARYLAND

Canadian Exclusive Sales Agents for PROTEK-SORB SILICA GEL
CANADIAN INDUSTRIES LIMITED
General Chemicals Division

Progress through Chemistry

©1944

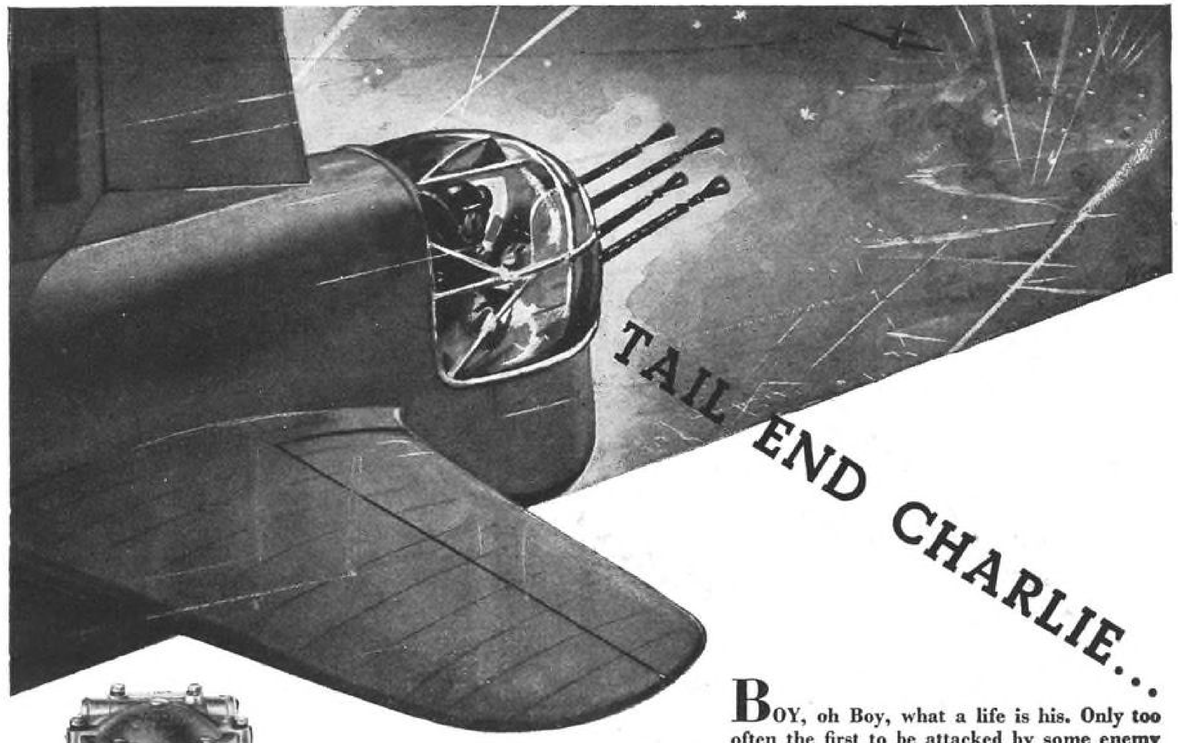

BOY, oh Boy, what a life is his. Only too often the first to be attacked by some enemy plane sneaking up on the tail of his machine. Usually the last to fight his way free from some pretty hot engagement . . . certainly " Tail-end Charlie " has no cushy job especially on Night-Op's.

But trained to the minute for his job with every possible contrivance to ensure the smooth working of the mechanism he controls, " Tail-end Charlie " just concentrates on his job . . . shooting 'em down and chalking 'em up.


And just where do Vokes Filters come into the story. Right here. Vokes Air, and Oil Filters are fitted to the aircraft he is flying whether it be British, Canadian or American. Vokes Air Filters supply 99.9% clean air to aero-engines. Vokes Oil Filters are used for main pump filtration of those engines. Vokes Low and High Pressure Filters for gun turrets are also fitted and incidentally also for retractable undercarriage hydraulic mechanism. Then again there is the Vokes Flametrap Silencer for both radial engines and in line engines extinguishing tell-tale exhaust flames.

Fighters, bombers, reconnaissance machines of British, American and Allied Air Forces operating in all battle areas have been fitted with Vokes Filters and have stood up to all demands made upon them. The practical experience gained we gladly place at the disposal of designers and producers of aero-engines and aircraft. We believe that this experience can be used not only to prolong the life and efficiency of aircraft, but help to secure added success and greater safety for our valiant fighters of the air and " keep 'em flying."

Vokes have produced over 3,000 models of their filters and, of course, provide the necessary housings and ducting systems. If you have any filtration problem consult Vokes, the pioneers and specialists in this work.



1



2



3

1. Vokes Oil Filter for Aircraft. **2. Vokes Aerovee Filter Element.**
3. Vokes typical Air Filter for Aircraft.

VOKES FILTRATION & SILENCING CO. INCORPORATED, 101, Park Avenue, New York, & VOKES (CANADA) LTD., 1123, Bay Street, Toronto, Canada, *Contractors to British and Dominion Governments.*

VOKES · LIMITED · LONDON · S·W·


DESIGNERS, PATENTEES & MANUFACTURERS OF AIR, OIL & FUEL FILTERS & SILENCERS

WIDE VARIETY OF


MICRO SWITCH

HOUSINGS AND ACTUATORS

for use with Air Corps approved type R-31 basic Micro Switch

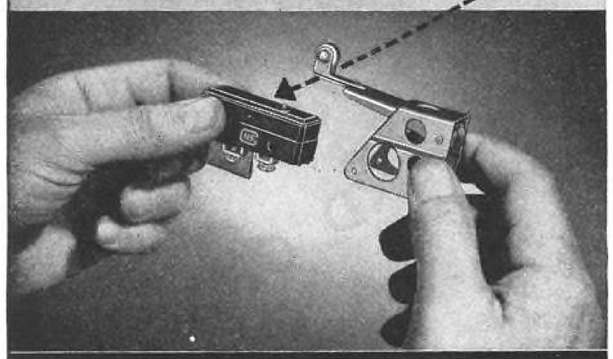

The Type "A" actuator illustrated has many new features not available in earlier types: Among these are field adjustability of the operating lever for free position, switch operating point, and pretravel.

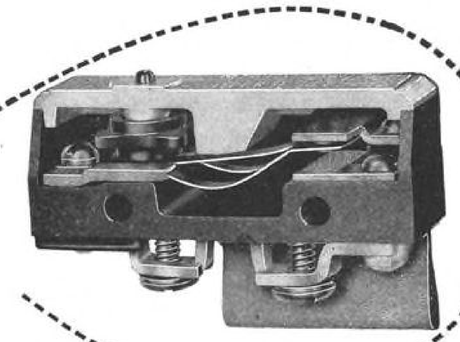

Cut-away View of Type R-31 Micro Switch


The Type R-31 Micro Switch uses the three-bladed, beryllium copper spring construction, which has proven so successful in the millions of Micro Switches used throughout industry. Adaptation to the requirements on aircraft incorporates contact separation of .070" which satisfactorily interrupts highly inductive loads under conditions of extreme altitude. Knurled contact surfaces insure positive operation on extremely small loads and minimizes transfer of contact material on D. C. operation.

MICRO Switches have been generally adopted by the aircraft industry because they are light, small, dependable, precise, and have high electrical switching capacity.


The characteristics of the Type R-31 basic Micro Switch (AN drawing No. 3210), which have made it the accepted, standard switch, stocked at all Air Depots, have been worked out with the cooperation of engineers throughout the entire industry, as well as the Army Air Corps and the Navy Bureau of Aeronautics.

Micro Switch pioneered standardization of this single type of basic switch to be used with a variety of housings and actuators to meet the widely varying conditions on airplanes, as developed by different manufacturers. Housings and actuators become parts of the planes and require no deviation permit. They are all built to use the standard Type R-31 Micro Switch for ready field replacement.


For complete details on the entire line of basic Micro Switches, actuators, and housings for aircraft use, ask for Catalog No. 70. We will be glad to supply as many copies as your engineers may require.




An example of the Type "M" series of panel mount brackets. These come in three lengths of threaded stems for easy positioning and providing overtravel of ¼" or ⅜". Operation takes place in first 1/32" of plunger travel.



The Type "T" bracket shown here has been widely used as a throttle warning switch, singly or in gangs. It is operated by cams on the throttle quadrant, or dogs on cables. It is a sturdy mount and actuator for use as a limit switch.



The Type "MS2731A" skeleton bracket has definitely controlled pretravel and overtravel . . . a total of approximately ¼". Meets Air Corps specifications for Types A-1 and A-2 switches. Switch element easily replaceable in field.



Example of the Type "H" series of aluminum housings. Can be sealed against dirt, splash, or oil. "A-N" outlet fittings may be straight or adjustable to 45 degrees.

© 1944

MICRO MS SWITCH

TRADE MARK

A DIVISION OF FIRST INDUSTRIAL CORPORATION


FREEPORT, ILL., U.S.A., Sales Offices in New York, Chicago, Cleveland, Los Angeles, Boston, Dallas, Portland, (Ore.)



"Uses Unlimited"—a dramatic talking motion picture of Micro Switches, in color, is available to industrial groups, training classes, schools and colleges, through Y.M.C.A. Motion Picture Bureau, New York, Chicago, San Francisco. Size: 16 mm. Length: 40 minutes. Write us for details.

LET'S ALL BACK THE ATTACK —BUY EXTRA WAR BONDS

If you're fishing for specials drop a line to Apex!

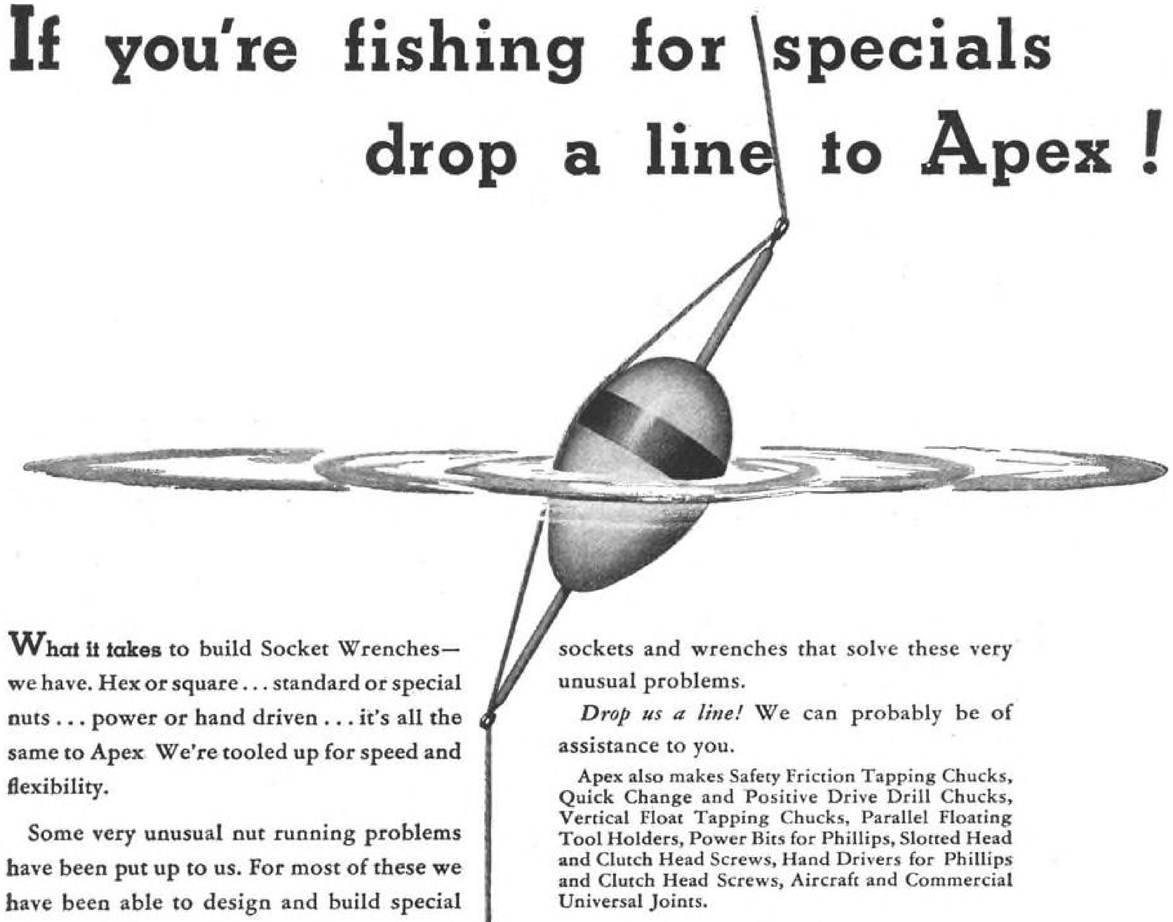

What it takes to build Socket Wrenches—we have. Hex or square . . . standard or special nuts . . . power or hand driven . . . it's all the same to Apex We're tooled up for speed and flexibility.


Some very unusual nut running problems have been put up to us. For most of these we have been able to design and build special sockets and wrenches that solve these very unusual problems.

Drop us a line! We can probably be of assistance to you.

Apex also makes Safety Friction Tapping Chucks, Quick Change and Positive Drive Drill Chucks, Vertical Float Tapping Chucks, Parallel Floating Tool Holders, Power Bits for Phillips, Slotted Head and Clutch Head Screws, Hand Drivers for Phillips and Clutch Head Screws, Aircraft and Commercial Universal Joints.

APEX Socket Wrenches

THE APEX MACHINE & TOOL COMPANY • DAYTON 2, OHIO

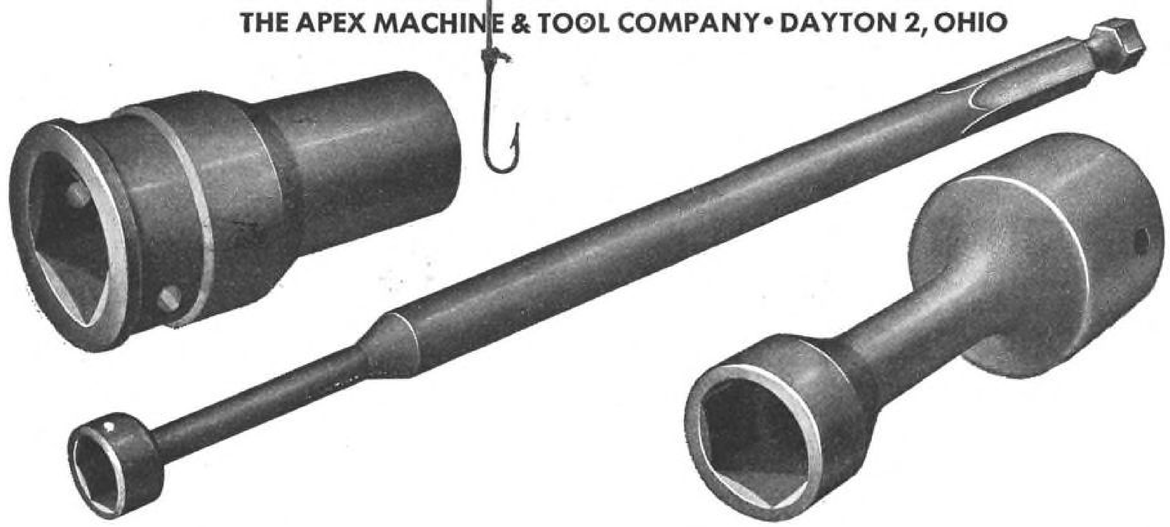

New way to get around curves!



Revolutionary new design enables Crown Zippers to slide freely around sharp curves—slide faster, smoother!

Today, Crown engineers, working in the field with Air Corps, Ordnance and Quartermaster officers, have developed a zipper that is making history—a zipper that actually slides freely around sharp curves.

Tomorrow, when the last shot has been fired, this great new zipper feature will find many applications in the aviation field—for engine covers, built-in inspection slits that can be zipped open, baggage compartment openings—and for many other vital jobs.


But a Crown Zipper's ability to take curves is only one of many basic advantages it has over ordinary, old-style zippers. (See complete list below.)

That is why Crown Zippers are in action today throughout the world — on airplane gun turrets, armored trucks, tents, sleeping bags and many other military items where human life depends on instant, unfailing action.

Remember, when you turn to post-war: Crown designers will adapt—or, if necessary, *create*—special zipper applications to meet special needs. Remember: you can zip faster, further, more securely, with a Crown Zipper!




CROWN ZIPPERS are 5 ways better

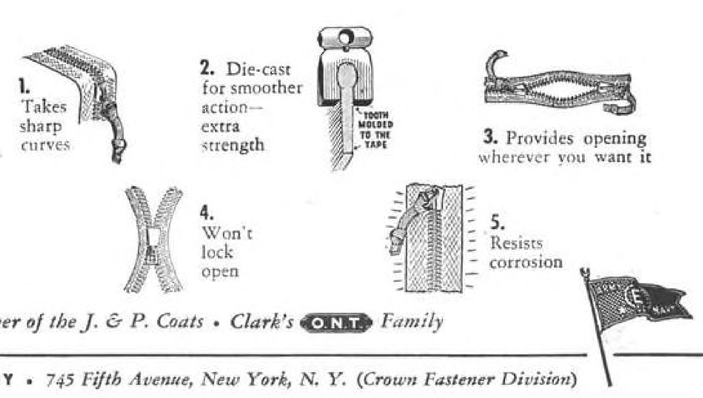

Member of the J. & P. Coats • Clark's O.N.T. Family


THE SPOOL COTTON COMPANY • *745 Fifth Avenue, New York, N. Y. (Crown Fastener Division)*

PRECISION ENGINEERING
—at production line cost—

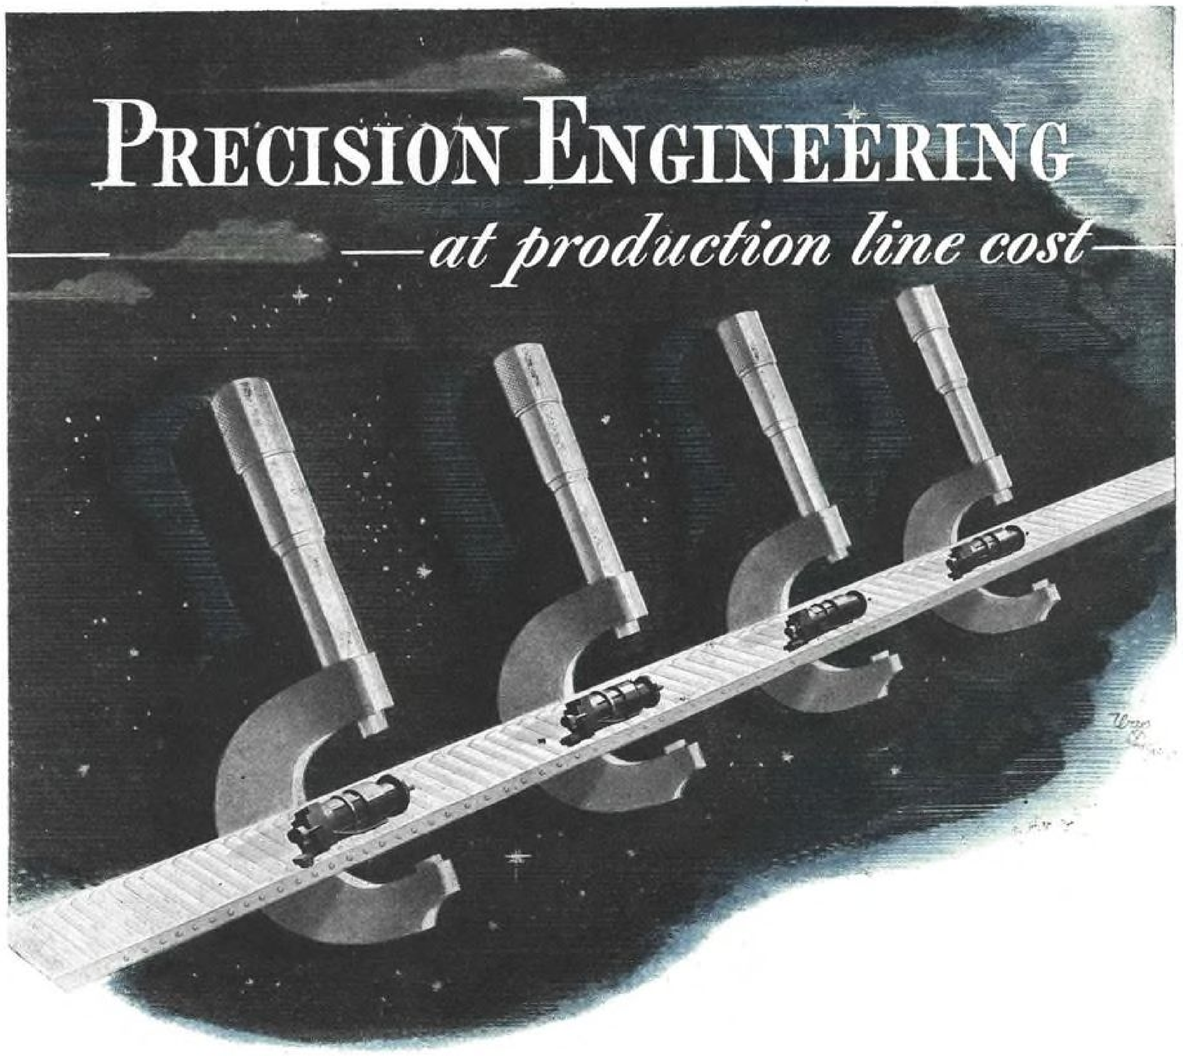

IN 3 weeks Jack & Heintz designed a unique retraction motor for the Air Forces . . . made important improvements in motor performance and life that had never before been thought possible . . . and in 2 more weeks were producing it in production-line quantity at a lower price to the government. When the war is won this Jack & Heintz ability will be available to industry—to help you with better parts or products, engineered and produced with new precision at production-line speed and low cost, to meet your postwar competition. We would like to show you this unique combination at work now. Jack & Heintz, Inc., Cleveland, Ohio, manufacturers of aircraft engine starters, generators, gyro pilots, gyro flight instruments, magnetos, motors.

JACK & HEINTZ
Incorporated

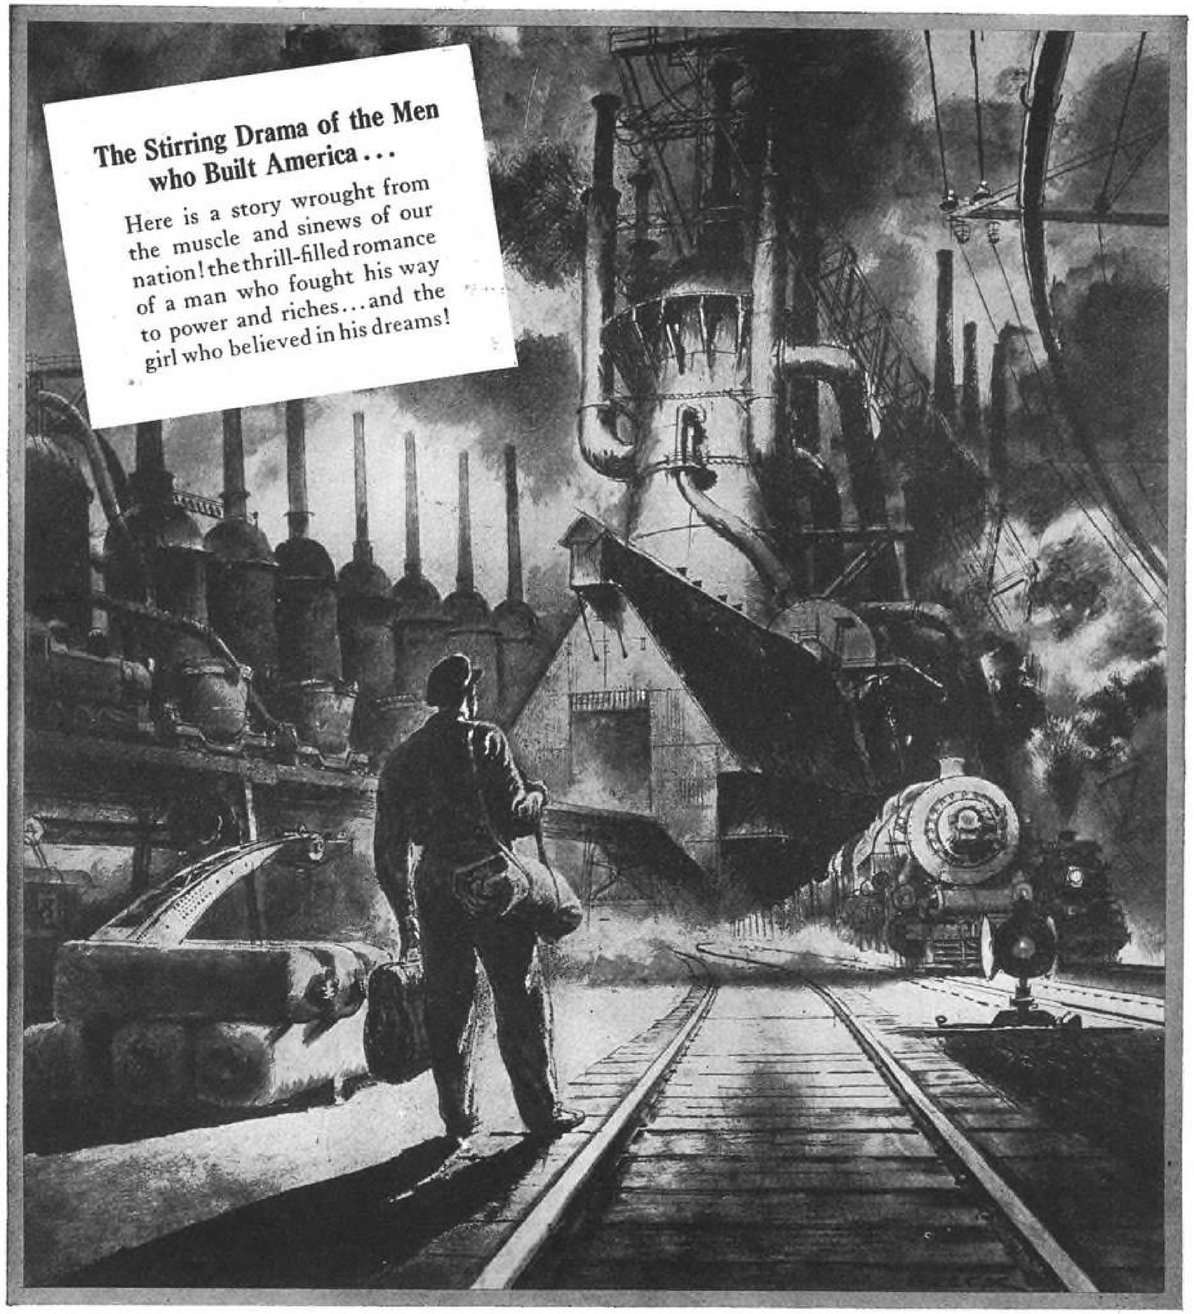

Drawing by Peter Helck

M-G-M PRESENTS KING VIDOR'S PRODUCTION IN TECHNICOLOR



AN American Romance

starring BRIAN DONLEVY

with ANN RICHARDS · WALTER ABEL
JOHN QUALEN · HORACE McNALLY

Screen Play by Herbert Dalmas and William Ludwig
Produced and Directed by KING VIDOR · A Metro-Goldwyn-Mayer Picture.

New for Aviation


A-P HYDRAULIC KwiKloZ VALVE

Single Seat Balanced Shut-off Valve—Never Affected By Back Pressure Whether Open or Closed



▶ Typical A-P Control development for the aircraft industry, the KwiKloz Valve offers new advantages in hydraulic testing systems and aircraft hydraulic system lines. A balanced valve, with a *single* seat, it permits easy and INSTANTANEOUS closing against a maximum pressure of 1500 lbs. p. s. i.

▶ It is more efficient, has fewer parts, is smaller, lighter, and uses less material. Can be quickly changed for clockwise or counter-clockwise operation. Corrosion resistant parts, heat treated, ground, and accurately polished. Outside dimension, 2½" x 2⅞" x1¼"; made to take connections per AND-10050 specifications or pipe tap.

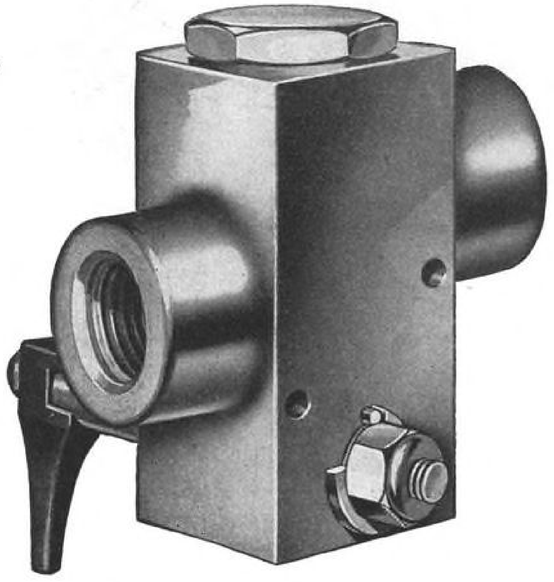

For KwiKloz Bulletin and Catalog of A-P Aircraft Controls . . . check and return this coupon . . .

Please send me the following:
☐ Bulletin on A-P Hydraulic KwiKloz Valve
☐ Catalog on A-P Aircraft Controls

Firm
Address
City
Attention of State

HYDRAULIC KwiKloZ VALVE


AIRCRAFT DIVISION
AUTOMATIC PRODUCTS COMPANY
2484 North Thirty-Second Street · Milwaukee 10, Wisconsin

YOU CAN GET THEM NOW!!!

PLOMB

CLOSE-COUPLED UNIVERSALS

3/8" SQ. DRIVE

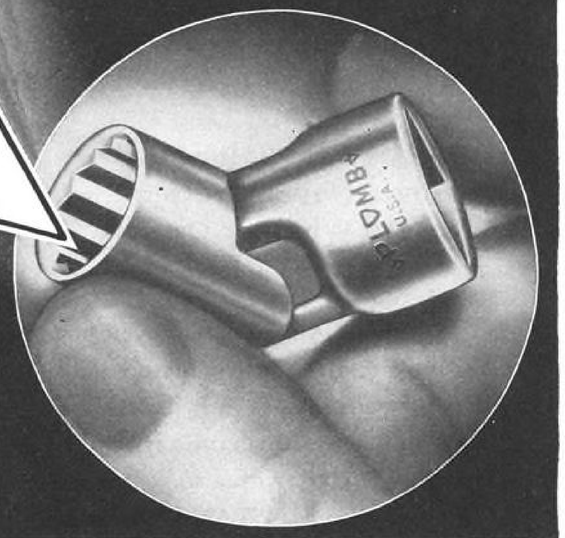


Shortest Type on the Market

Plomb Universal Sockets are shorter and more compact than any others. They'll reach many hard-to-get-at places where longer, clumsier types won't go at all, and help you get around all ordinary obstructions faster and better.

Exclusive Plomb design and tough Plomballoy steel make these advantages possible — greater strength yet lighter construction, thinner walls, less overall length and bulk. Joints are sturdy and smooth acting. Openings are precisely made to fit positively and snugly — do not slip off nuts or bolts.

Qualities like these make all tools in the Plomb line first choice among expert mechanics for better, safer, longer-lasting service. See them today at your Plomb distributor or write for the name and address of the one nearest you. Free catalog on request. — Plomb Tool Company, 2221 Santa Fe Avenue, Los Angeles 54, California.

GET INTO MORE OBSTRUCTED PLACES

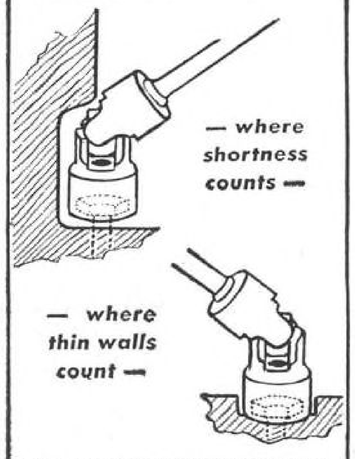

— where shortness counts —


— where thin walls count —

The universal is an obstruction tool. To get into congested places you need the shortest and most compact you can buy. That's the Plomb Universal. 3/8" square drive types can now be purchased from your Plomb distributor. Seven opening sizes, 3/8" to 3/4". Overall lengths (fully extended) 1 3/8" to 1-13/16". Get the ones you need today.

PLOMB



Buy a War Bond Today

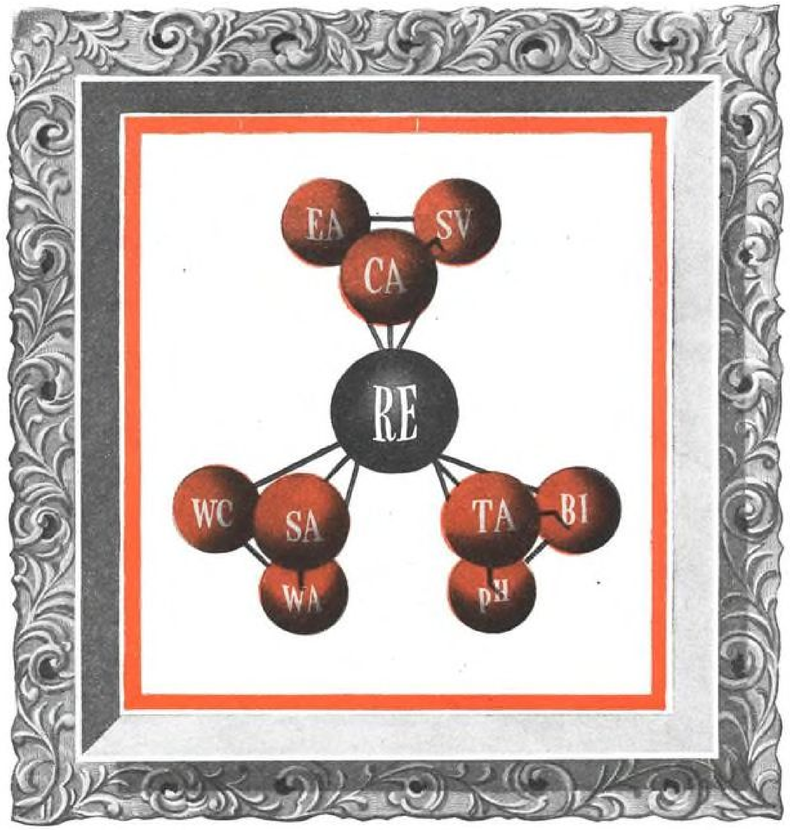

PORTRAIT OF A CHASSIS BEING BATHED

Whether you are washing the exterior of a truck, removing carbon from a piston, or cleaning the upholstery of a bus, this is the picture of working factors in the scientifically balanced chemical compound. It is also the picture of a cup and saucer being washed. It is a cement floor being mopped. *It is Turco in action.*

The relative value and balance of all the factors is determined by RE; for Research and Experience are the directing agents. They assign roles, give to each agent the correct emphasis, balance them all (one factor does not insure effectiveness in a compound any more than one drug in a prescription). RE symbolizes two decades Turco laboratories have devoted to solving industry's vital problems in the conditioning, maintaining and cleaning of surfaces. Take advantage of it on everything from washing a locomotive to preparing aluminum for anodizing. Call the Turco Field Service Man, or write to Turco.

EA —*Emulsifying Action disperses grease and oil as tiny globules, suspends them, and prevents redeposition.*

CA —*Colloidal Activity disperses solids into minute particles easily removed.*

SV —*Saponifying Value is the ability to convert organic fats and oils into soluble soaps.*

TA —*Total Alkalinity (or acidity) is the total amount of either available for cleaning.*

BI —*Buffer Index is the ability to absorb either alkaline or acid soil to prolong solution efficiency.*

pH —*A yardstick for measuring the energy of alkalinity or acidity.*

SA —*Solvent Action is the ability to put soil into solution.*

WA —*Wetting Action lowers surface and interfacial tensions, causing solution penetration to base surface.*

WC —*Water Conditioning removes or controls the elements which cause water hardness.*

RE —all the elements above are mobilized through Turco's Research and Experience.*


* *For a fuller explanation of these vital factors, write for Turco's "The Chemistry of Chemical Compounds," on your letterhead, please.*

TURCO INDUSTRIAL CHEMICAL COMPOUNDS

TURCO PRODUCTS, INC. *Main Office and Factory:* 6135 S. Central Avenue, Los Angeles 1 • *Southern Factory:* 1606 Henderson Street, Houston 10, Texas • *Chicago Office and Factory:* 125 West 46th Street, Chicago 9, Illinois • *Offices and Warehouses in All Principal Cities*

TEMPERATURE ENGINEERING

. . . AN ESSENTIAL FACTOR IN AIRCRAFT PERFORMANCE

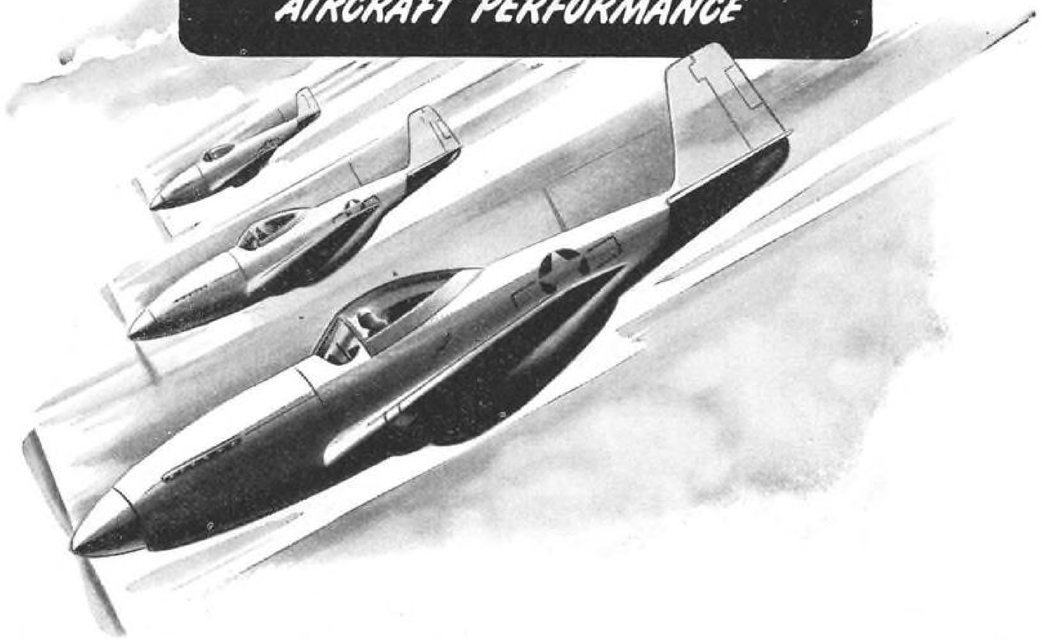

Harrison's part in the aircraft industry is to design and build products that dissipate heat.

There is heat of combustion to be dissipated from the jacket coolant; heat of compression to be removed from supercharged air before it is mixed with fuel; and engine-generated heat to be taken out of lubricating oil. Each job presents its particular problem . . . a problem complicated by the extreme variation in flight conditions from sea-level temperatures to the bitter cold of the stratosphere.

The function of temperature engineering is to determine the most effective design—the best disposition of metal—for removing heat where its presence is harmful. Dependability, light weight and compactness are the objectives, and they have been achieved in the Harrison heat transfer products serving today in America's military aircraft.

WAR BONDS SAVE LIVES

HARRISON AVIATION TESTING LABORATORIES

With a variety of technical equipment that is unexcelled, Harrison's Aviation Testing Laboratories provide facilities for testing aircraft products under conditions that closely approximate those of actual flight. Here Harrison aircraft products are put through their paces in the sub-zero cold of the Arctic or the heat of the tropics, with all conditions and test results indicated on instruments in the various control rooms. These facilities are an essential part of Harrison's leadership in temperature engineering.

HARRISON

OIL COOLERS • CONTROL VALVES • RADIATORS
DIVERTER VALVES • SUPERCHARGER INTERCOOLERS

HARRISON RADIATOR DIVISION OF GENERAL MOTORS, LOCKPORT, NEW YORK

CAL-AERO
TECHNICAL INSTITUTE
is the new name of

CURTISS TECHNICAL WRIGHT INSTITUTE

MAJOR C. C. MOSELEY, PRES. SINCE 1929

GRAND CENTRAL AIR TERMINAL .... GLENDALE 1, CALIFORNIA

SINCE 1929--THE BEST TO BE HAD IN SPECIALIZED TRAINING--FOR YOUR

AVIATION CAREER

Never was it more opportune for you to get into Aviation! Its future is clear, definite, assured. Military air transport lines have proven the airplane to be an indispensable factor. AMERICA IS GOING TO FLY—for pleasure, for business, for commerce. Prepare yourself now for your career in post-war aviation.

"CAL-AERO" has purchased GRAND CENTRAL AIR TERMINAL in GLENDALE, CALIFORNIA, the home of Curtiss-Wright Technical Institute. The Curtiss-Wright Corporation originally acquired this airport, in 1929 at a cost of almost $3,000,000.


In preparation for the great post-war activity in Aviation, the name of this school has been changed to CAL-AERO TECHNICAL INSTITUTE. — simplifying and coordinating relative operations. Other than in name, there will be no change in the school.—SAME MANAGEMENT—SAME LOCATION—SAME PERSONNEL—SAME FINE SPECIALIZED TRAINING in Aeronautical Engineering and Master Aviation Mechanics, incorporating all of the latest developments and methods to insure a thorough foundation for your future career in Aviation. Flight training is restricted to Army Air Force Cadets for the duration.

Created during the war, the name "CAL-AERO" emerges symbolic of the highest standards in Aviation training. With an unmatched and unparalleled record of efficiency and safety in training more than 20,000 pilots for the Army Air Forces, together with this school's record of training 7,500 ground-crew men, at the same time, graduating thousands of civilians for the production front; these schools under the personal direction of Major C. C. Moseley since 1929, have been highly honored by citations for distinguished service in training men for the Army Air Forces.

In view of the co-related activities of these two schools in Aviation, with their honored record of war effort, it is but natural in planning, for the post-war period, that the technical phase of Aviation training should come under the distinguished name of "CAL-AERO". It will continue as heretofore, since 1929, under the personal direction of Major C. C. Moseley, on its own airport.—Grand Central Air Terminal in the heart of Southern California's giant aircraft industry.

As a result, CAL-AERO TECHNICAL INSTITUTE, with its honored war record and continuous service of training civilian students since 1929, emerges larger, stronger and finer than ever before. Civilian students have continued to enroll into this school during the war from many states and foreign nations, despite the difficulties of wartime travel. Returning service men, anxious to fit themselves for an outstanding place in post-war Aviation, likewise are enrolling upon discharge.

And so, as this distinguished old school of Aeronautics enters the post-war era, it does so with a distinguished new name.—CAL-AERO TECHNICAL INSTITUTE—a name that, in the supreme test of war has come to signify a new standard in Aviation training.

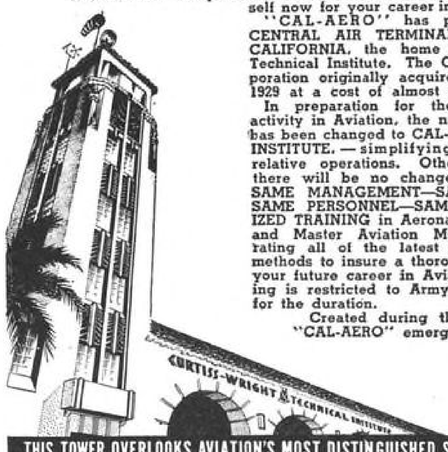

THIS TOWER OVERLOOKS AVIATION'S MOST DISTINGUISHED SCHOOL OF AERONAUTICS

CAL-AERO TECHNICAL INSTITUTE

FORMERLY CURTISS-WRIGHT TECHNICAL INSTITUTE

GRAND CENTRAL AIR TERMINAL
1226 AIRWAY, GLENDALE 1, CALIFORNIA
(LOS ANGELES COUNTY)

UNDER PERSONAL SUPERVISION OF MAJOR C. C. MOSELEY, PRESIDENT AND FOUNDER, SINCE 1929

ON OUR OWN AIRPORT - IN THE HEART OF THE AIRCRAFT INDUSTRY

BE WISE—PROTECT YOUR FUTURE

MAIL TODAY • DON'T DELAY

WITHOUT COST OR OBLIGATION SEND ME FULL INFORMATION AND CATALOG ON THE COURSE CHECKED BELOW


- ☐ AERONAUTICAL ENGINEERING COURSE
- ☐ MASTER AVIATION MECHANIC COURSE
- ☐ SPECIALIZED ENGINE COURSE
- ☐ SPECIALIZED AIRPLANE COURSE
- ☐ POST GRADUATE AERONAUTICAL ENGINEERING COURSE
- ☐ SPECIALIZED AIRCRAFT SHEET METAL COURSE
- ☐ AERONAUTICAL DRAFTING COURSE, HOME STUDY
- ☐ AIRCRAFT BLUE PRINT READING COURSE, HOME STUDY

NAME

ADDRESS

CITY STATE

DATE OF BIRTH AV-11

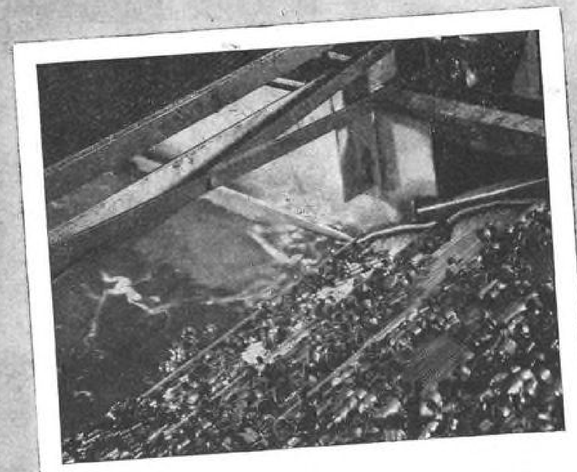

Cartridge belt link plant—Ordinary quenching oils wouldn't do the job. With Gulf Super-Quench, production of links increased 30%, rejections were practically eliminated, and press down-time for reshaping dies was reduced 33%.



Shell fuse plant—With soluble oil as the cutting fluid, this machine drilled and tapped 700 parts per hour. With Gulf Cut-Aid—no other changes—production is approximately 1,000 per hour . . . a gain of 43%!



Textile mill—All-round better performance of Dobby looms with Gulf quality lubricants resulted in a 50% reduction in seconds.

How

Gulf Quality Petroleum Products

help increase output and reduce costs

These plants are typical of hundreds in every industry that have secured many worthwhile benefits directly as a result of the superior performance of Gulf quality lubricants, quenching and cutting oils.

Increased production, longer bearing and tool life, better finishes on machined parts, improved rust prevention, lower maintenance costs, and improved physical properties in many types of steel—these are some of the results industry is obtaining through the use of the proper Gulf petroleum products, as recommended by Gulf Service Engineers.

It will pay you to investigate these *more efficient production and maintenance tools.* Call in a Gulf Service Engineer today and ask him to give you additional facts on their quality and performance values.

Back the Attack . . .

Buy More War Bonds!

GULF INDUSTRIAL LUBRICATION

helps make machines produce more at lower cost

GULF OIL CORPORATION • GULF REFINING COMPANY • GULF BUILDING, PITTSBURGH 30, PA.

MERIAM

NOW OFFERS A COMPLETE AIRSPEED INDICATOR TEST UNIT

• For the first time we present a *complete* Meriam Airspeed Indicator Test Unit—with a manometer as the primary standard, for checking and calibrating airspeed indicators.

It consists of TWO Individual Units:

1. *2-tube manometer in a single case. (One tube for water, the other for mercury.)*

2. *Pressure generator with necessary valve and rack for mounting indicators.*

The scales are duplex type graduated in inches and tenths with knots or miles per hour, and are compensated for a given operating temperature.

Valve equipment allows isolation of water manometer from mercury manometer so that tests can be continued without interruption over the full range.

A thermometer in the manometer case indicates true temperature at all times.

The tube roller mechanism provides fine vernier control; clips permit convenient placement and removal of indicators.

The foregoing and many other features are an indication of the expert construction of this instrument. It is a unit made in keeping with the valued Meriam tradition of quality—a unit that is dependable, accurate, and convenient to use—greatly facilitating testing.

THE MERIAM *Instrument* COMPANY

10928 MADISON AVENUE CLEVELAND 2, OHIO

ASK FOR *Bulletin 27*



Unit consists of pressure generator and 2-tube Meriam manometer.







All Standard Schrader Valve Caps in use today contain the specially designed sealing unit with a dome-shaped rubber washer vulcanized between two dome-shaped BRASS plates. Because of their unique construction, these caps are guaranteed airtight up to 250 lbs. pressure. This mighty midget does the work.

MR. & MRS. AMERICA

How to help save your tires. Make it a habit to:

1. Check the tightness of your valve cap each time after you inflate your tires to effect a 100% seal.
2. While you have the cap off (to gauge or add air) look inside it to see if the washer is worn out.
3. If you have no cap or the washer is worn out, replace it as soon as possible with a Standard Cap to be sure that underinflation cannot be caused by leakage through the valve.



Schrader
CONTROLS THE AIR

You wouldn't use a water buffalo if your tires gave out? Naturally not—but what would you use if you couldn't get the new tires you need? Since new tires for most of us are still a thing of the future, the situation is very *serious.*

What to do about it? Take care of your present tires—that's just good sense. How? Keep them properly inflated at all times—for underinflation is the greatest single cause of ruined tires, excessive wear, poor mileage and damage to side walls.

Combating underinflation is easy. Gauge pressure regularly. Put air in tires when needed. Seal the valve with a Schrader Cap.

With the armed forces, the care of tires is a vital issue. No pneumatic tire equipped military vehicle passes inspection without a Standard Cap on all tire valves for everybody knows their importance. Screwed down fingertight, a Schrader Cap makes an airtight seal up to *250 lbs.* pressure.

Be sure a Standard Cap is on every tire valve. Take care of those you have—don't lose them by leaving them on loosely. If your dealer is temporarily out of Schrader Caps, don't blame him. Try again later.


CAPS are vital for TIRE CONSERVATION

A. SCHRADER'S SON, *Division of Scovill Manufacturing Company, Incorporated,* **BROOKLYN, NEW YORK**

BOLTON

RADIO SHIELDED IGNITION ASSEMBLIES *for* **Combat Engines**



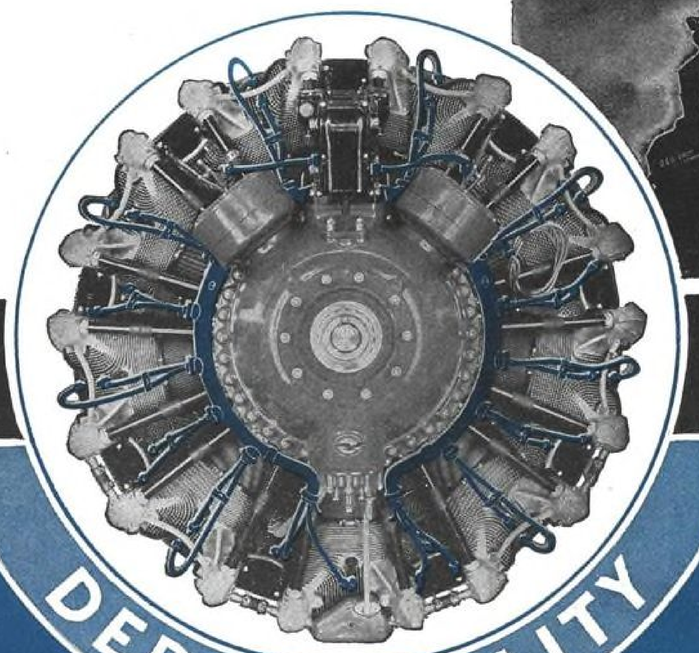

BOLTON MFG. CORP'N
WEST HAVEN
CONN.

Not Time Yet
for Paper Capers!



Sure, the news is good — terrific, in fact. But don't let that give you the idea that America's paper shortage is over. More paper than ever is needed now to wrap supplies for our armies as they drive toward their goal. There's still a manpower shortage in the pulp industry.

So, you've still got to watch your company's use of paper with the hawk eye of a paper miser.

You've still got to use your ingenuity and that of your staff to find even more ways to *use less paper.*

All material made of paper and paperboard still must be cut to the bone. Eliminate whatever you can until complete and final victory ends the paper pinch.

The baling of wastepaper and sending it to the reprocessing plant is still of prime importance.

Remember—
PAPER IS WAR POWER



USE LESS PAPER — SAVE ALL WASTEPAPER

This advertisement contributed by this publication and prepared by the War Advertising Council in cooperation with the War Production Board and the Office of War Information.

PIONEER PARACHUTE CO.
is Ready!





PIONEER PARACHUTE MODEL P3-B
Safer, more positive action. Comfortable, with 50% less seat space and 20% less weight, without sacrifice of strength. P3-B is accepted as standard equipment by U. S. Army and Navy. Equipped with fool-proof, foul-proof, pilot chute.

There will be no need to wait for dependable, foul-proof Pioneer Parachutes when peacetime aviation gets the green light. Indeed, Pioneer Parachute Company — originators of a long line of advancements in parachute design and research — is ready *now* to supply civilian flying with the same thoroughness and efficiency with which it is serving the Army and Navy. Pioneer Parachutes will go far to encourage the widest possible acceptance of aviation in the coming tremendous expansion in air travel. Look to Pioneer Parachute Company for safer, lighter, stronger, more comfortable parachutes. Pioneer is ready *now* and is leading the way.

Home of Pioneer Parachute Company where designing and testing, weaving and manufacturing, from the raw product to the finished parachute, are all coordinated within one company.



CHENEY *fabrics*

PIONEER PARACHUTE COMPANY, INC.

MANCHESTER, CONNECTICUT, U. S. A.

CABLE ADDRESS: PIPAR. TELEPHONE: Manchester 4157

WEST COAST FACTORY BRANCH, 109 SOUTH CENTRAL AVENUE, GLENDALE 4, CALIFORNIA

CORROSION RESISTANCE


...and its importance in aircraft metals

Corrosion is a complicated subject... but many forms of it yield to a simple solution.

All of the INCO Nickel Alloys withstand the attack of *all* these potential corrosion producers:

> Marine atmosphere • salt water • compressed oxygen • ethylene glycol (Prestone) • fire-fighting solutions • anhydrous ammonia and other refrigerants • alkalis and numerous acid conditions • tetraethyl lead and other high-octane gasolines and their combustion products.

In addition, the INCO Alloys...Inconel, Nickel, and the various forms of Monel ...have other properties essential to the continuous performance of important aircraft parts.

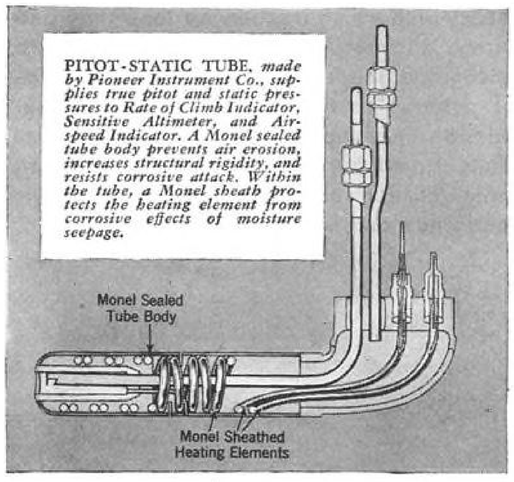

PITOT-STATIC TUBE, *made by Pioneer Instrument Co., supplies true pitot and static pressures to Rate of Climb Indicator, Sensitive Altimeter, and Airspeed Indicator. A Monel sealed tube body prevents air erosion, increases structural rigidity, and resists corrosive attack. Within the tube, a Monel sheath protects the heating element from corrosive effects of moisture seepage.*

"Plus" Properties of Inco Nickel Alloys

All are strong and tough. Each possesses specialized properties...*extra hardness*, in "K" Monel; *fast-machining*, in "R" Monel; *extra heat resistance*, in Inconel; etc.... which fits it for specialized jobs.

Corrosion tests conducted in marine atmospheres show uniformly high resistance by all 8 INCO Nickel Alloys. Some surface discoloration may occur ...but there is no loss in tensile strength.

In addition, they have relatively high endurance limits under corrosive conditions. Their endurance is often better than that of steels which may have shown higher values when tested in non-corrosive surroundings.

Four Practical Examples

Typical of the important service of INCO Nickel Alloys in aircraft is the use of Monel in the Pitot-Static Tube, made by Pioneer Instrument Company.

Since three vital flight instruments depend upon its accuracy, the Pitot-Static Tube must deliver true pressures from the air stream under all flying conditions.

In the words of the makers..."The problem of *durability in a corrosive atmosphere* dictated the selection of a special Monel sealed tube body. This . . . completely solves the problems of 'peeled plating' and . . . gives greater hardness and increased resistance to accidental shock or bending. The de-icing electrical heating element is... sealed in a Monel sheath . . . *effectively preventing the corrosive effects from moisture seepage.*"



FUEL-BOOSTER PUMP, *made by Thompson Products, Inc., guards high-flying planes against bubbles in gas tank. Monel rotating cup seal and seal gasket retaining washer are, in words of Pioneer engineers, "extremely important to life and proper functioning of pump." Monel bypass valve washer and valve guide-cup are also used.*

Another example is the use of Inconel exhaust manifolds on Pan-American Clippers. The manifolds withstand constant vibration and *the continuous blast of corrosive high-octane exhaust gases at 1500° F.*

Since Monel is practically immune to corrosion by high-octane aviation fuels, it is widely used throughout fuel lines for strainers, screens, valve parts,



STRAINER FOR AVIATION FUEL NOZZLE *is made of Monel wire cloth . . . resists corrosion by high octane fuels and by atmosphere. Monel wire cloth is electrically welded . . . illustrating workable properties of Monel.*

primer tubes, fuel selector valves and fuel pumps.

One such use is the Monel wire cloth strainer for aviation fuel nozzles, made by Michigan Wire Cloth Co., Detroit.

Another is the use of Monel in the Fuel Booster Pump, made by Thompson Products, Inc.,... the pump which confines within the tank the millions of bubbles that form in gasoline at high altitudes and would cause vapor lock and engine failure if allowed to pass into the fuel lines.

* * *

For further data about corrosion as it affects the choice of aircraft metals...and for other valuable information about the INCO Nickel Alloys (high and low temperature properties, heat transfer, mechanical properties, fabrication, etc.) write for the new booklet, "INCO Nickel Alloys for the Aircraft Industry." Address:


THE INTERNATIONAL NICKEL COMPANY, INC.
67 WALL ST., NEW YORK 5, N. Y.

NICKEL INCO ALLOYS

MONEL • "K" MONEL • "S" MONEL • "R" MONEL • "KR" MONEL • INCONEL • "Z" NICKEL • NICKEL
Sheet...Strip...Rod...Tubing...Wire...Castings...Welding Rods

SIOUX AIRCRAFT

WET VALVE SEAT GRINDING MACHINE for INLINE and RADIAL MOTORS

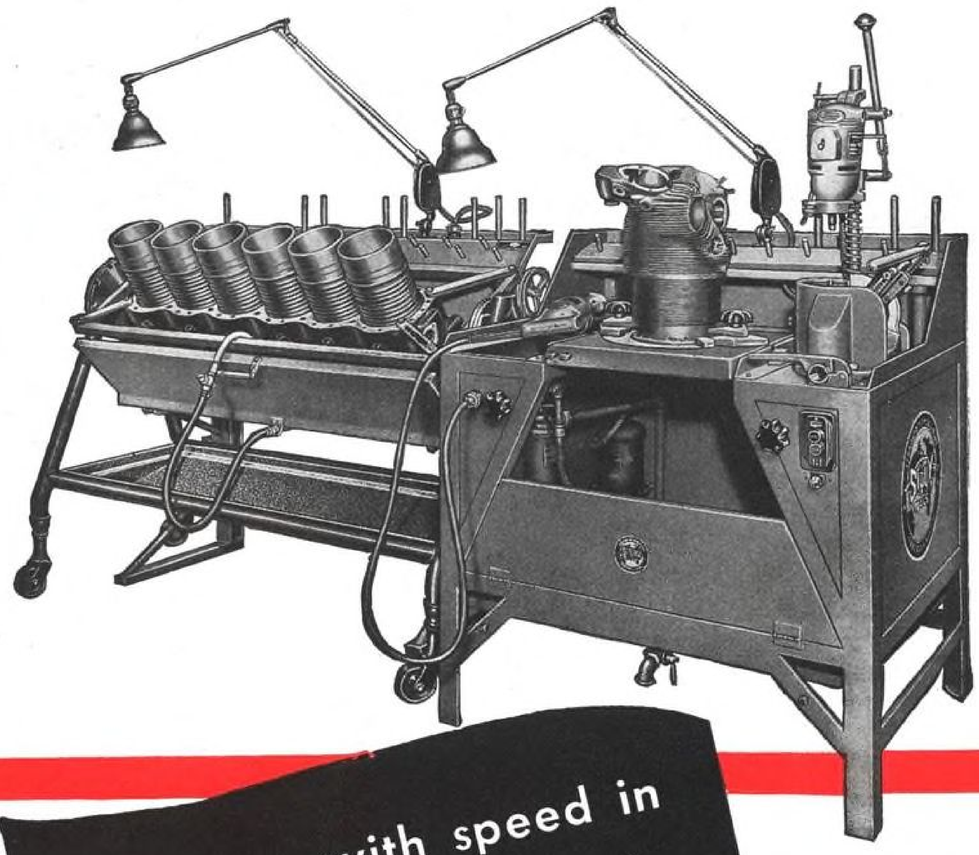

Precision with speed in either production or maintenance

WRITE FOR DETAILS

STANDARD THE WORLD OVER

ALBERTSON & CO., INC. SIOUX CITY, IOWA, U. S. A.

Problem No. 1: **LIQUIDATING "FROZEN ASSETS"**



KARDEX visible record control speeds **DISPOSAL OF SURPLUS** materials and parts



AIRCRAFT PRODUCER
clearing 100,000-item stock

This leading midwest manufacturer operates a "Disposal Service"—that effectively finds buyers within and outside the aircraft industry. *Kardex Visible* Inventory Records provide speedy reference to inquiries received, facilitating profitable action at minimum operating cost.

U. S. FIGHTING SERVICE
reproduces stock records for catalog

Direct photolithography of actual inventory record provides a really up-to-the-minute catalog of surplus items which is sent out to prospective purchasers periodically. A highly-efficient procedure—easy with *Index Visible Records* showing actual stock status of each item on the *visible* margin.

Necessity of disposing promptly of surplus stocks of materials, parts and tools faces business today.

Whether such "frozen" stocks are due to design changes or Government contract terminations, they threaten to become a serious drag on operations during the critical reconversion period.

In the one case the company's own capital may be represented. In the other, even though title to such material usually passes to the Government if disposal action is not taken, the cost involved becomes part of the contract settlement and for various causes final payment may be postponed for many months.

Farsighted organizations are taking the aggressive action that means prompt realization of the funds invested in these items. While there is still a definite and often a very active market, they are offering and selling these materials at prices that may not be obtainable later on.

To effect such disposal with the greatest efficiency and at the least cost, Remington Rand visible systems have proved time and again to provide the ideal method of record control. With prospects developed and prices offered permanently, and visibly recorded, company officials and contracting officers can take prompt and profitable action.


We will gladly lend *to responsible executives a detailed and comprehensive study on Termination Procedures prepared for our salesmen's use by our Systems Research Division. This study is not for sale. Ask our nearest Branch Office for a copy.*

COPYRIGHT 1944

SYSTEMS DIVISION

REMINGTON RAND


Buffalo 5, New York

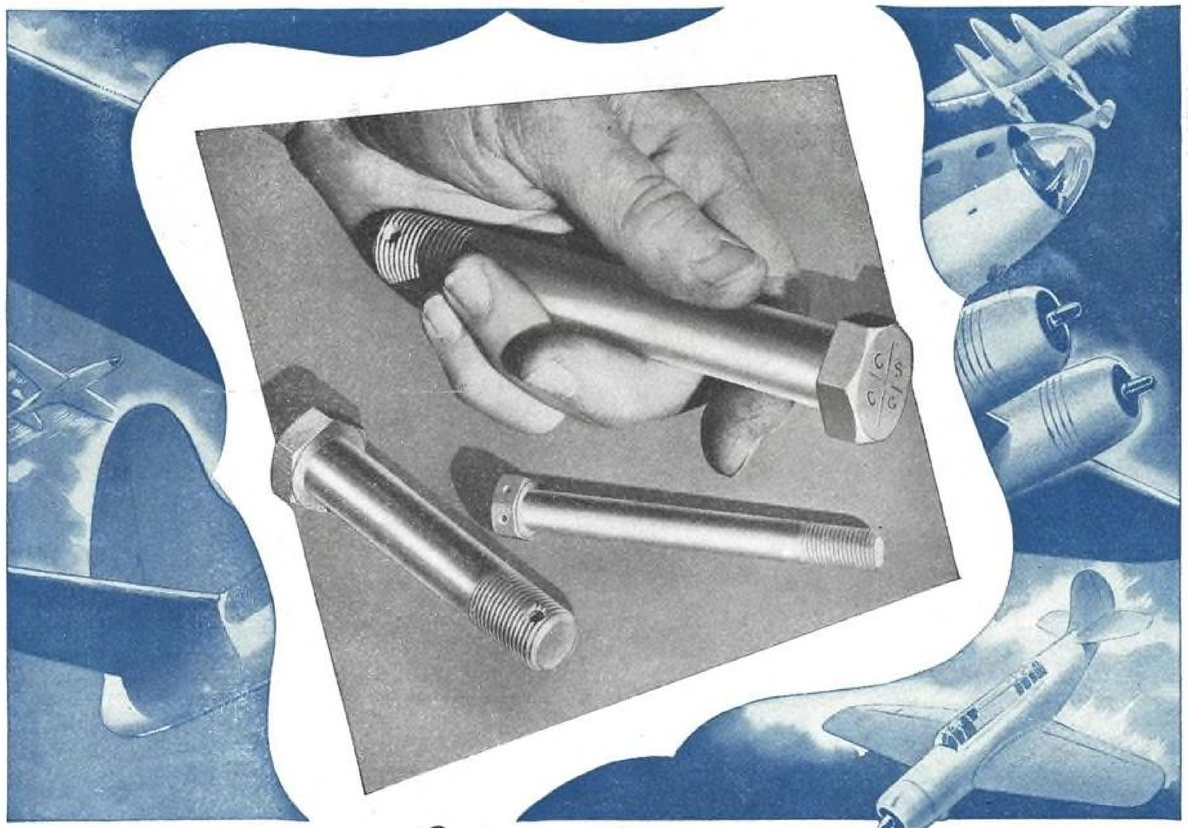

You Get "AN" Specifications *plus,*

in CLEVELAND AIRCRAFT BOLTS made by the Kaufman Process..

a Cleveland-developed method producing greater strength and accuracy

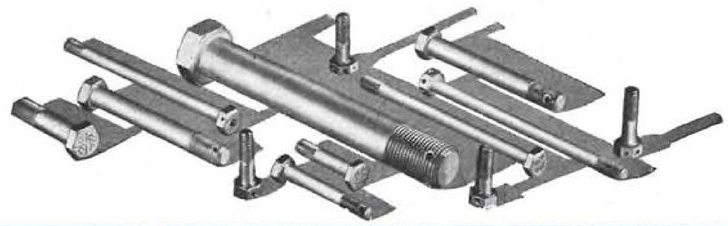

CLEVELAND *Top Quality* **FASTENERS**

The Cleveland Cap Screw Company

2945 EAST 79TH STREET • CLEVELAND 4, OHIO

ALLOY AND AIRCRAFT PARTS DIVISION

MADE BY THE ORIGINATORS OF THE KAUFMAN PROCESS FOR GREATER STRENGTH AND ACCURACY

This Performance:

28 FOOT WIDTH CLEARED AT 20-30 MILES PER HOUR



Assures These Savings:

FLIGHT-HOURS

Walter Snow Fighters have the speed to keep ahead of any blizzard. Walter-equipped airports start flying from clean runways the moment the storm stops. No flying time is lost because of unsafe runways.

ACCIDENT LOSSES

Snow on runways is held to a safe minimum during a storm. Dangerous snow banks are dispersed —eliminating a common cause of crack-ups in emergency landings and take-offs.

FEWER TRUCKS

The remarkable volume of snow removed per hour by Walter Snow Fighters enables you to use fewer trucks while doing a better job of runway clearing.

MAINTENANCE AND FUEL

Fewer trucks to service means lower operating costs for airports whose snow removal programs are built around Walter Snow Fighters.

Outstanding power, traction and speed make Walter Snow Fighters your first and fastest choice for runway clearing. Key to their exceptional performance is the exclusive Walter Four-Point Positive Drive.


Three automatic locking differentials proportion power to each of FOUR driving wheels according to their traction at any instant. There is no side-slipping, stalling or wheel-spinning. Sustained high-speed plowing throws snow far to the side—eliminating dangerous snow banks.

Take the first step towards putting these savings into effect at your airport. Write today for complete information on Walter Snow Fighters.

Walter Motor Truck Co. 1001-19 Irving Ave. Ridgewood 27, Queens, L.I.N.Y.



WALTER SNOW FIGHTERS

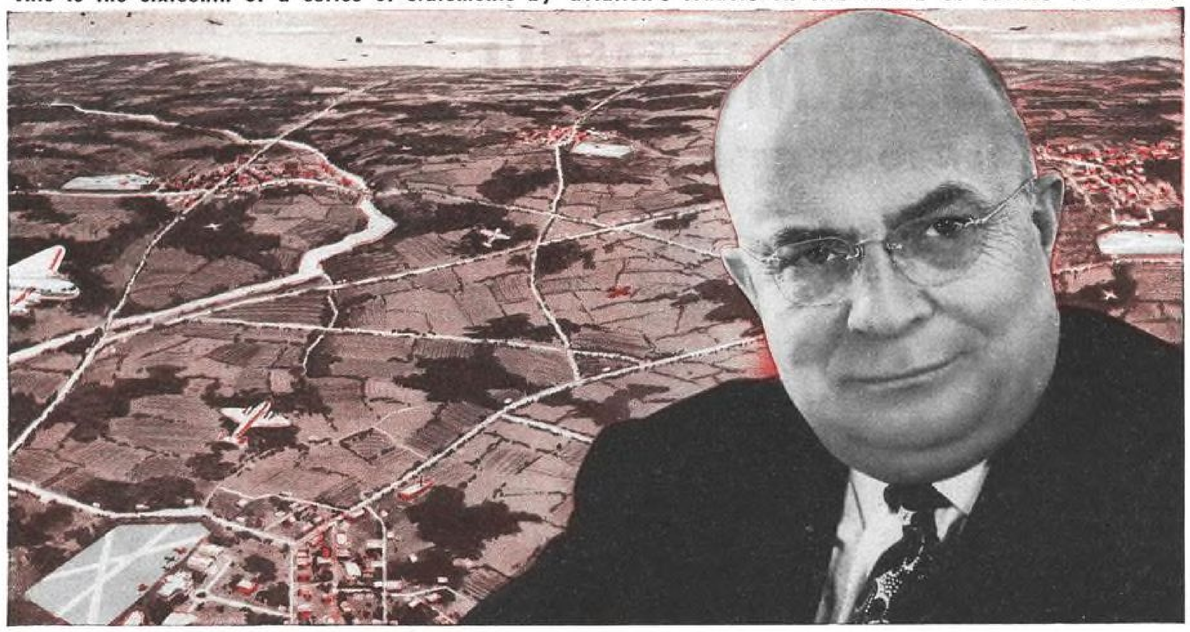

"Let's put our most dynamic capital to work!"

says HENRY J. KAISER, *President, Henry J. Kaiser Company*

"AMERICA'S MOST DYNAMIC CAPITAL-INVESTMENT *is in the million or more young men trained to live and work in the air, to manufacture and service airplanes. These pioneers can open a great new chapter in transportation, in the accelerated evolution of American industry. But will the aviation industry, with its record of daring and achievement, give them their opportunity?*

"The answer is 'yes!'—if it gets moving now. Let industry, with Government encouragement, take on a pre-selling program for airplanes, accept orders at fixed prices for postwar delivery; and let labor enter now into postwar contracts.

"With that head start, there is no economic or technological reason why the aviation industry, which produced 3555 personal airplanes in 1939, and 7700 of them in 1941, should not in the first two years after the war manufacture and sell a minimum of 50,000 personal airplanes, perhaps as many as 150,000. And it is not visionary to picture the manufacture and sale of a million personal planes during the next ten years —and 5000 terminals to house and service them."

Magnificent are America's opportunities-in-the-air, Mr. Kaiser. But these opportunities will not be fully realized until they have been *sold* as down-to-earth practicalities.

And the first place to sell them is to the "test pilot" market of U.S. people who are ready to buy progress whenever they see it in business or private living.

***This is the market that aviation thinks of when it thinks of the more than a million* TIME*-reading families—** who are America's best prospects for planes and air travel— whose positions in American business make them the natural national vanguard for any programs aviation may set up— who vote* TIME *their favorite magazine 7 to 1 over the runner-up.*

Believing that the ideas of aviation's leaders are always of interest to the aviation industry, TIME here gives them wider circulation in the name of

AVIATION'S SILENT PARTNERS — TIME — THE READERS OF TIME

FOR PROTECTION AGAINST WEAR AND TEAR—*DEMAND*

REEVES ARMY TWILL

"FROM COTTON TO CUTTER"



Countless public safety organizations specify *invasion-tested* Reeves Army Twill. Wherever durable, good-looking uniforms are needed, this top-quality fabric tailors smartly and gives superb service. Over 80 million yards of it have already been used to help equip America's fighting men, and it is proving itself under the toughest climatic and combat conditions of global war. This fabric, Sanforized Shrunk* and color-fast to sun, water and perspiration, will meet *your* post-war uniform needs. When the time comes to order them, choose from a wide range of popular colors, for long-lasting good looks insist on Reeves Army Twill.

*Residual shrinkage less than 1%

THE REEVES FABRIC GROUP INCLUDES: *Reeves Army Twill*
Glengarrie Poplin • Reeveking Gabardine • Byrd Cloth
Marine Herringbone • Mountain Cloth • Warrior Twill

SPINNING WEAVING DYEING FINISHING Reeves FABRIC

Mills Mill, Greenville, S. C. and Woodruff, S. C.
Fairforest Finishing Co., Spartanburg, S. C.

REEVES BROTHERS, INC.
54 WORTH STREET • NEW YORK 13, N. Y.

Representatives in Atlanta • Boston • Chicago • Dallas • Los Angeles • Philadelphia • St. Louis • Montreal • Toronto

Officially appointed distributors of

Government Excess

aircraft hardware & parts special accessories

Items available include **AN**
Bolts Nuts
Screws Cable
Turnbuckles
Rod Ends
Pulleys Valves
Tubing Fittings
Clamps & Clips
Taper Pins
Grommets
Rivets
and many others.

To curtail further accumulation of stock piles . . . and eliminate additional production of items now stored in quantity in aircraft plants . . . the U. S. Government has instituted a plan for the orderly redistribution of excess stocks.

Air Associates has been appointed an agent to aid in the disposition of aircraft hardware, parts, and special accessories. We are honored by the opportunity to serve under this plan.


Aviation supply headquarters since 1927, Air Associates is proud to offer its long experience in the field, and the facilities of its four centrally located warehouses to firms needing these fine precision materials . . . Excess stocks include all AN Standard hardware parts, all types of AN fittings, and all Standard and many special aircraft components. Items are new, unused, certified by government inspectors as "aircraft quality" . . . do not require any subsequent inspections by service branches, government contractors, or airline operators . . . are sold at the lowest prevailing market prices.

Investigate this surplus! *You perform a patriotic service by helping toward the successful fulfillment of the government's plan for liquidation of the excess—and you aid yourself by obtaining immediate delivery, without waiting for production!*

Wire your requirements to—

Air Associates, INC.

EAST COAST . . . Teterboro, N. J.
MIDWEST . . . . . Chicago, Ill.
SOUTHWEST . . . Dallas, Texas
WEST COAST . . . Los Angeles, Calif.

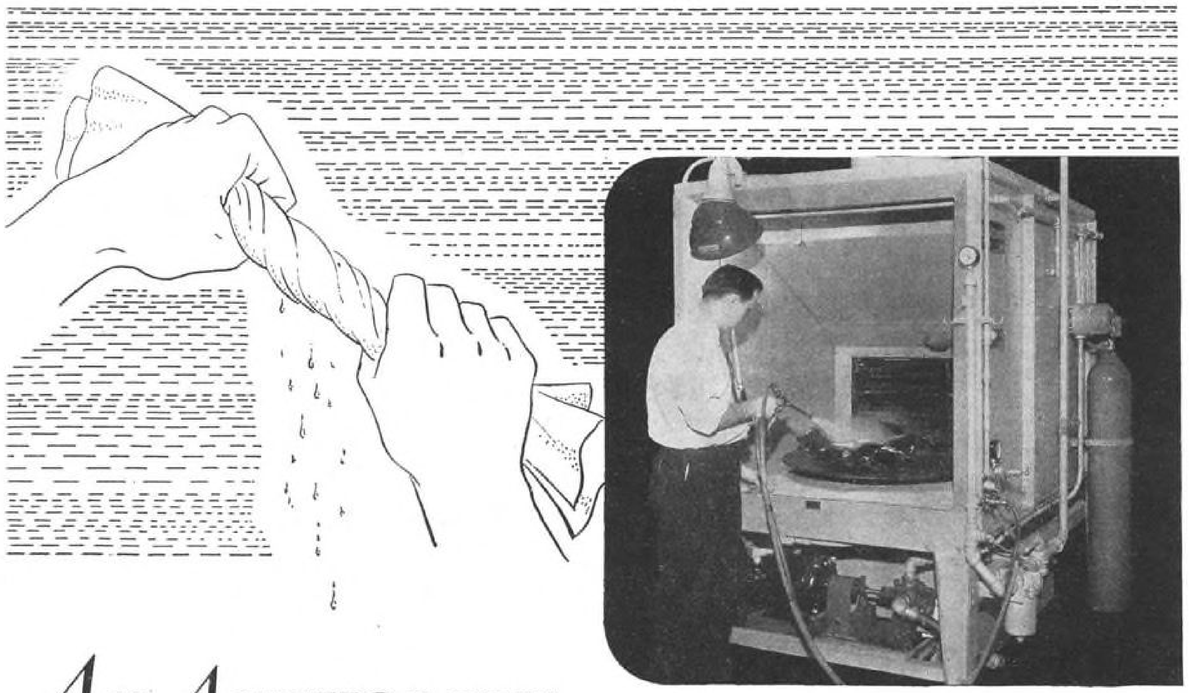

An Authority on Wringing Air

Pummeling solvent-laden air through a unique series of sharp directional changes in its course—to wring from the air its treasure of war critical solvents—is another way DeVilbiss air engineering aids aviation operations.

The DeVilbiss Spray-Degreasing Booth shown above demonstrates this air action and the results. Airplane engine parts are cleaned with a powerful solvent spray from a DeVilbiss Gun. The exhausted air is charged with solvent mist and because organic solvents are a vital war material, reclaiming is necessary. So, this DeVilbiss Booth is engineered to shake down the solvent mist, precipitating it into a tank for re-use. It has proved a master of efficiency in holding solvent loss to a minimum, in safely handling this highly-volatile, low-flash-point material and in guarding health and property.

The full scope of DeVilbiss air experience over more than a half century includes the most complete knowledge of the basic principles and advanced techniques for *compressing, cleaning, regulating, controlling, exhausting, conveying and utilizing air.* And from this has come the development of a broad line of modern, efficient DeVilbiss Equipment that is performing such operations as the mass production painting of planes, hot doping of wing fabrics, caulking seams, ventilating shop areas, compressing air for service tools, controlling the flow of fluid materials, and other services.

What DeVilbiss air experience means to you can be found in the *experience of DeVilbiss users* in Aviation. Ask a DeVilbiss man to give you these performance facts in aircraft operations like your own.

THE DEVILBISS COMPANY • TOLEDO 1, OHIO
Canadian Plant: WINDSOR, ONTARIO



DE VILBISS
Spray Systems

SPRAY EQUIPMENT • EXHAUST SYSTEMS • AIR COMPRESSORS • HOSE & CONNECTIONS



A NEW AVIATION CATALOG!

Weatherhead "A-N" Fittings—Now and Postwar

The Weatherhead Company were pioneers in the manufacture of aircraft fittings. Many of the most important design changes on aircraft fittings were originated by Weatherhead. Our facilities, now and *in the future,* will be directed to the volume production of high-quality fittings, hose assemblies, valves, and actuating cylinders. All of the necessary designs, specifications, and photographs on these products are contained in our new Aviation Catalog.

SAVE TIME SAVE MONEY SAVE EFFORT

Write for this handy source book today.

SIX SECTIONS
for quick reference
- **AN Fittings**
- **AC 811 Fittings**
- **Flexible Hose**
- **Hose Assemblies**
- **Valves and Cylinders**
- **Complete Engineering Data**

Weatherhead Engineers will be glad to work with you to solve your fittings and hose assemblies problems. Our new Development Laboratory is at your disposal for the creation of new fittings and other products to meet your special requirements.

Look Ahead With

Weatherhead

THE WEATHERHEAD COMPANY, CLEVELAND, OHIO

One of the Oldest and Largest Manufacturers of Vital Parts for the Aviation Industry

SAFETY . . .

WITH **UNBRAKO**

Reg. U. S. Pat. Off.


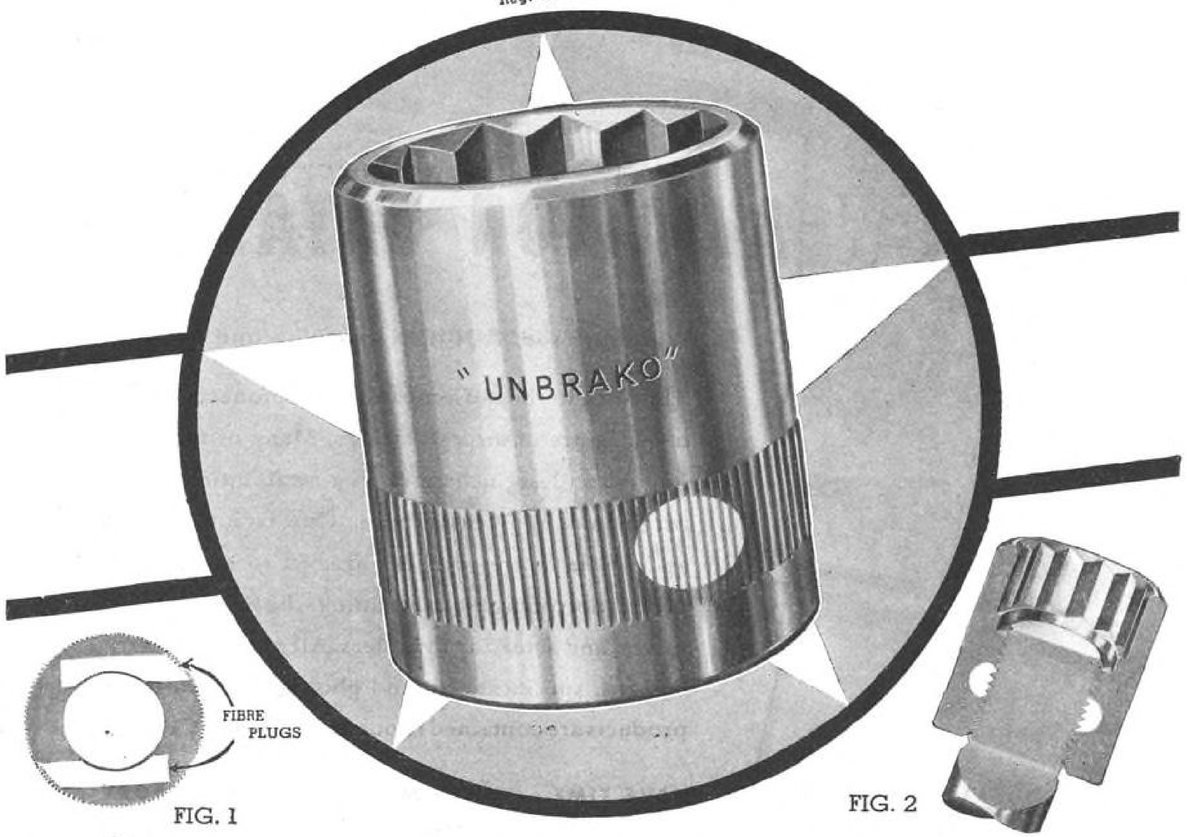


FIG. 1

FIG. 2



Our Internal Wrenching Bolt (B) and 100° Flush-Head Socket Bolt (C) were designed expressly by and for the aviation industry. These must be made to tolerances so extremely close as only our long and extensive experience in the field of precision automatic work makes practicable. The internal wrenching feature facilitates compact designs — saves weight, material and cost.

UNBRAKO INTERNAL WRENCHING LOCK NUT

For primary connections in aircraft, the "UNBRAKO" INTERNAL WRENCHING LOCK NUT is a superb and officially approved safety nut. Two vulcanized fibre plugs (Fig. 1) inserted through the body of the nut provide the locking feature. Fig. 2 shows how these plugs contact four threads of the bolt, assuring an absolutely dependable locking grip.


This design also permits of maximum thread length in the nut. "Unbrako" is heat treated to a high degree of Rockwell hardness. The "Unbrako" can be used again and again almost indefinitely before the torque falls below the Wright Field minimum.

OVER 40 YEARS IN BUSINESS


STANDARD PRESSED STEEL CO.

JENKINTOWN, PENNA., BOX 566 • BRANCHES: BOSTON • DETROIT • INDIANAPOLIS • CHICAGO • ST. LOUIS • SAN FRANCISCO

LINEAR "PAR" PACKINGS... PRODUCE A FLUID-TIGHT SEAL FROM ZERO TO PEAK PRESSURE ...FOR THIS 5000-TON PRESS

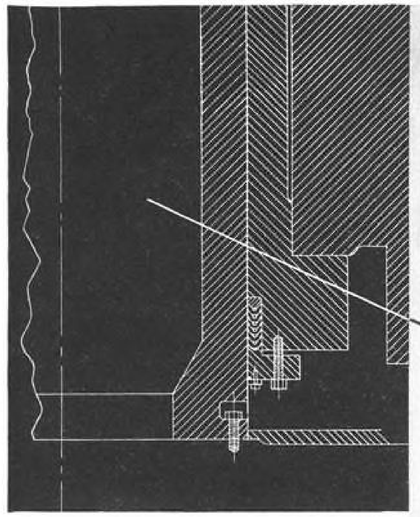


Linear "Par" Packings enable this 66" diameter ram to deliver pressure of 2920 pounds per square inch.

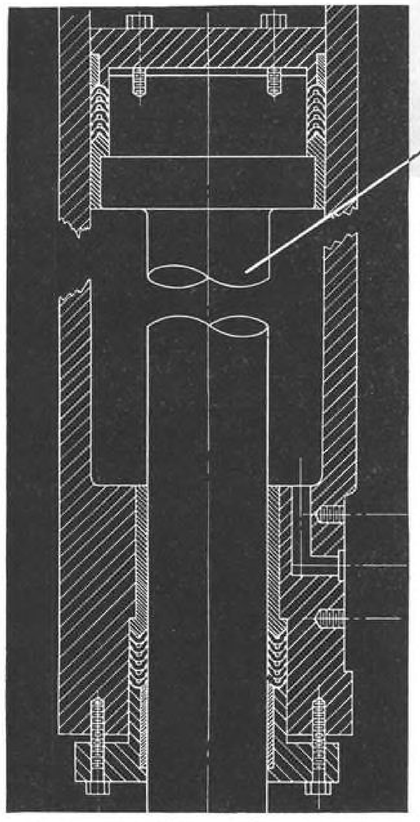

Linear "Par" Packings seal in . . . equally as well . . . the pressure of the 5" diameter pull back rams and table cylinders.

Photos and Sketches by Courtesy of Birdsboro Foundry & Machine Co., Birdsboro, Pa.

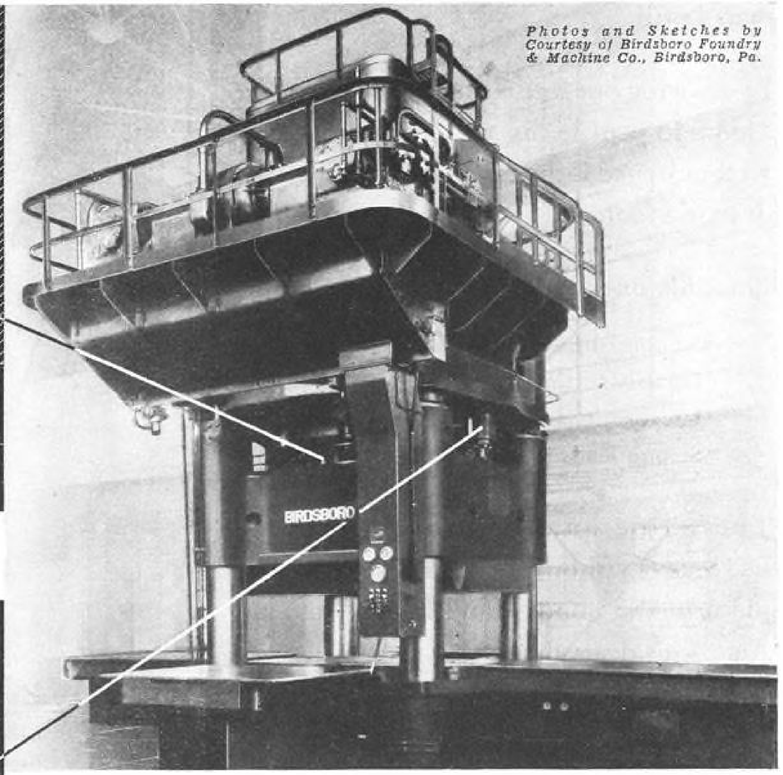

This powerful Birdsboro hydraulic press which turns out precision stampings, carries out one of the many manufacturing steps which transform raw material into a "superbomber" or a huge "luxury liner," transport plane.

For highest efficiency the hydraulically actuated mechanism of this giant press must be carefully controlled at every point. Linear "Par" Packings confine the oil . . . the hydraulic fluid . . . within specified limits; they control the hydraulic power from source to point of application; unaffected by oil . . . impervious to any fluid used as a pressure medium . . . they produce a constant, fluid-tight seal under pressure or at zero loads.

The distinctive design of Linear "Par" Packings insures a completely automatic packing. The channels formed between the rings act as reservoirs for lubrication. The pressure developed in the unit directly governs the expansion of the lips, and higher pressures serve only to increase the sealing action, insuring maximum efficiency and uniform pressure maintenance.

On the return stroke and when lower pressure is being developed, expansion of the lips is proportionately reduced, permitting free operation of the ram without leakage and eliminating extreme friction and wear.

Linear "Par" packings are manufactured from six compositions, each for a specific service. They are the choice of designers in the engineering of hydraulic equipment of the most modern type. The consultation of Linear engineers is available . . sample rings upon request.

LINEAR PACKING & RUBBER CO.

STATE ROAD & LEVICK STREET
TACONY, PHILADELPHIA 35, PENNA.

YOU ASK FOR IT!

By watching him draw one line, a Chief knows the extent of a draftsman's skill.

By drawing one line with a Typhonite Eldorado pencil, *you* will know how well-deserved is the fame of this great drawing tool.

Eldorado offers you:

- Smooth responsiveness
- Opacity of line
- Uniformity and accuracy of grading
- Strong leads

These fine qualities have given Dixon's Typhonite Eldorado first place in the minds — and hands — of America's draftsmen.

So ask for it.

Just fill in and mail the coupon below. A sample will convince you that you should ask for it for your work.



TYPHONITE

ELDORADO

Pencil Sales Dept. 61-J11
Joseph Dixon Crucible Co., Jersey City 3, N. J.

Gentlemen:
Please send me a free "Comparison Sample" of Typhonite Eldorado drawing pencil in ..... degree.


Name.....

Address.....

City.....State.....



Get the Jump on Nerve Trouble

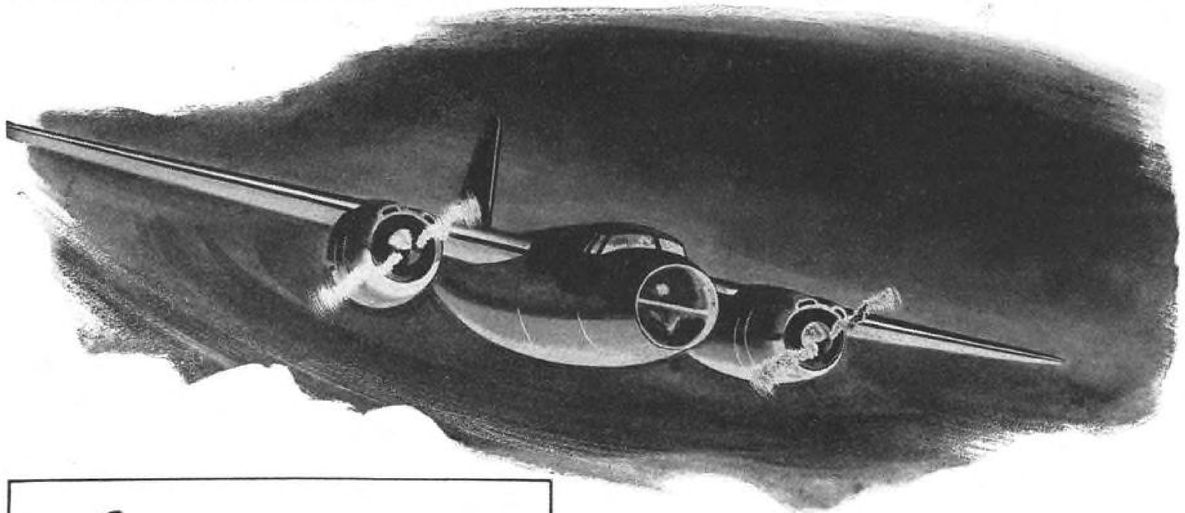



Klixon "Push-Pull" Breaker. Ratings of 5-50 amps. "Pull" feature permits opening the circuit manually at the breaker for de-energizing the circuit for service work.

Klixon Push Breakers. PM and PLM ratings from 2 amps. through 150 amps.

Klixon PSM Push Breaker. Same mounting dimensions as standard AN mechanical toggle switches. Ratings up to 35 amperes.

Klixon Switch Breakers. C-6363 ratings from 5-35 amps. D-6364 ratings from 35 amps. through 120 amps.

Klixon Remote-Control Breaker. Available in three frame sizes with ratings from 35 amps. through 200 amps. for circuits up to 30 volts D. C.

Use KLIXON Aircraft Circuit Breakers

Over 1½ miles of electrical circuits in a fighter . . . over 7 miles in a heavy bomber — and any part or all of the system may be endangered by shorts or overloads caused by enemy action or internal troubles. Yet, this danger can be guarded against and eliminated by installing Klixon Circuit Breakers.

Compact, lightweight Klixon Breakers promptly trip-out the affected circuits should a short or sustained overload endanger the electrical system. Then, as soon as the overload condition is corrected, the pilot re-establishes the circuit by merely pushing a button or snapping a switch. And although Klixon Aircraft Circuit Breakers are plenty sensitive to harmful overloads, they are unaffected by harmless momentary overloads.


Klixon Aircraft Circuit Breakers are available in all types . . . switch, push-pull, indicating, automatic reset, remote control and others. Each operates surely and accurately in all ranges of altitude regardless of the position of mounting. They are highly resistant to shock, vibration, and motion. Write for bulletins containing sizes, weights, dimensions and performance characteristics.

ARMY E NAVY

KLIXON

TRADE MARK REG. U.S. PAT. OFF.

SPENCER THERMOSTAT COMPANY
ATTLEBORO, MASSACHUSETTS

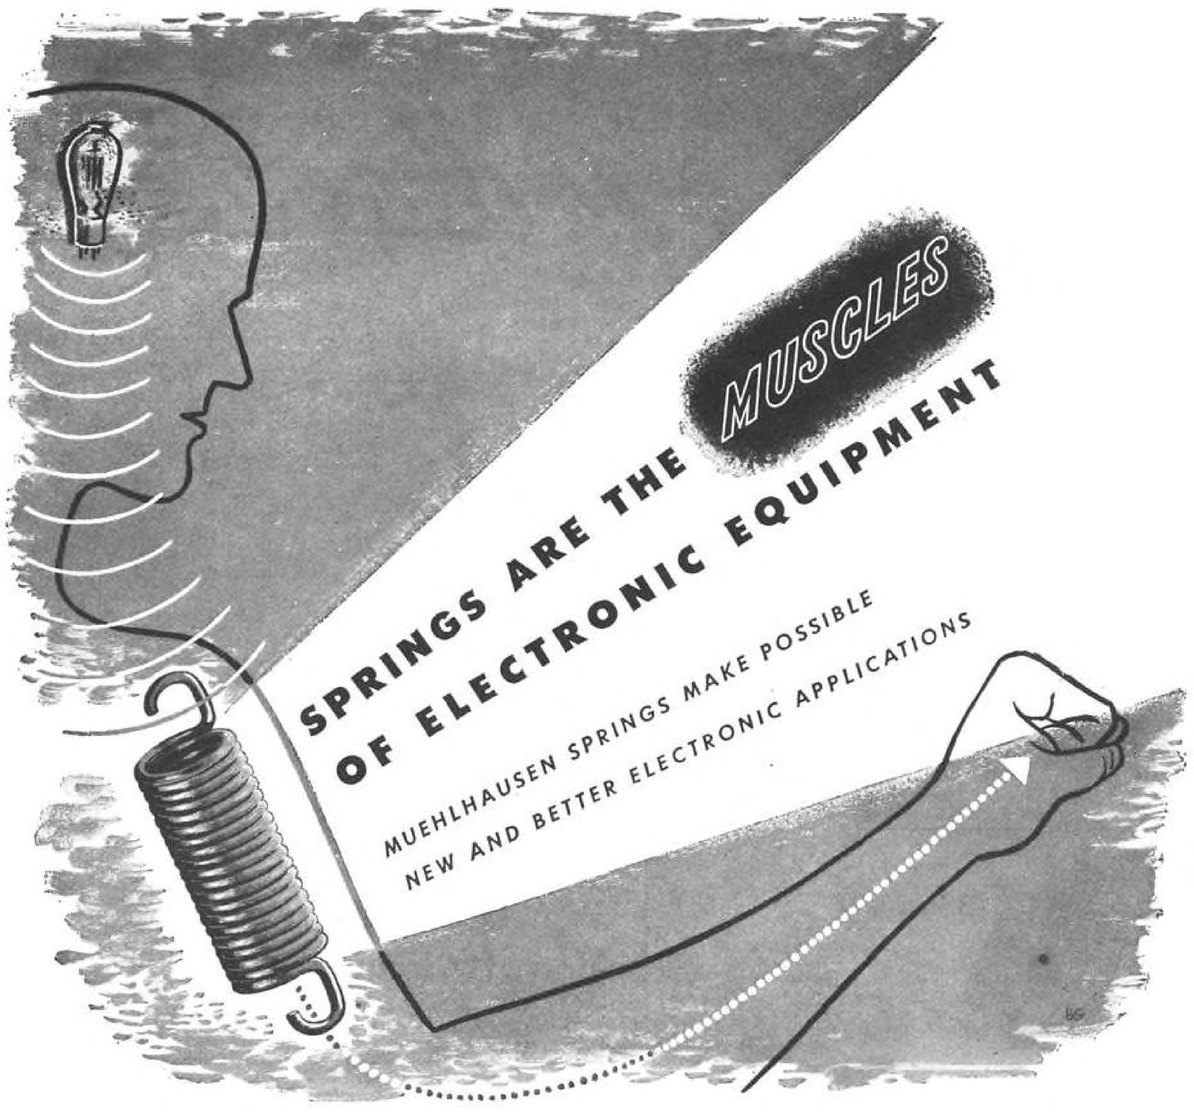

A TINY light flashes. Immediately, a massive machine starts operating. One little tube supplies the impulse. But *springs are the muscles* which accurately control the mechanical motion—tireless muscles, capable of working continuously, without strain.

To give the precise, instantaneous action necessary for gaining full value of electronic control, such springs must be designed for the specific application—and all factors bearing on their use scientifically evaluated.

Muehlhausen engineers have solved thousands of spring problems which arise with unusual applications—by the thorough study they make of all operating conditions, and their many painstaking tests to prove that each design is *right*. An assurance of greater latitude in the design of new and better electronic products.

MUEHLHAUSEN SPRING CORPORATION
Division of Standard Steel Spring Company
740 Michigan Avenue, Logansport, Indiana



Leading product designers in every industry are consulting Muehlhausen Engineers to secure springs of lasting efficiency.

MUEHLHAUSEN SPRINGS
EVERY TYPE AND SIZE



Photo Courtesy Boeing Aircraft Co.

PRESSTITE Sealing Compounds

Extensively Used in Boeing's Giant B-29 Bombers

Nose sections, Plexiglas enclosures and gun turrets are sealed with Presstite No. 23212 Synthetic Glass Extruded Tape. It is also used between window pane flanges and window panes of the B-29.

Various holes and slots in the pressurized cabins, watertight compartments, and the vapor seal in the wings are sealed with Presstite Type SH-30 Thiokol Sealer. Presstite Type 11544 Brush-On Cabin Sealer seals the riveted seams in pressurized sections.

Meeting the complex sealing requirements of our vast aircraft industry is only one example of Presstite's ability to develop sealers for specific requirements. For today, on land, sea, and in the air, Presstite products are being used in ever-increasing quantities by our Armed Forces.

If your product or your manufacturing processes require sealing or coating compounds, send your requirements to *sealing specialists*. Presstite will gladly work with you and your engineers in suggesting the most effective compounds to meet your particular needs.

PRESSTITE SEALING COMPOUNDS

A Partial List of Industries for Which Presstite has successfully Developed Special Sealing Compounds:

For the Aircraft Industry:
Sealers for
Integral Fuel Tanks
Fuselage Seams
Drop-off, Expendable Fuel Tanks
Gun Turrets
Synthetic Glass
Instruments
Intercoolers
Air Ducts
Insulating Dissimilar Metals
Seaplane Floats

For the Refrigeration Industry:
Sealers for Domestic and Commercial Refrigerators
Bonding and Sealing Low Temperature Insulation in Refrigerated Rooms

For the Railroads:
Sealers for Insulating, Soundproofing and Weatherproofing of Railway Cars—Sealing Car Windows and Spot Welded Seams

For the Building Industry:
Roof Coatings, Caulking, and Waterproofing Compounds

For the Shipbuilding Industry:
Insulation Adhesive and Sealers — Rust Preventive Compounds

For the Automotive Industry:
Special Adhesives and Sealers


For the Construction Industry:
Sealers for Jointing Sewer Pipes
Sealers for Waterproofing Excavation Work

Miscellaneous:
For Glazing Greenhouse Windows
Extruded Caulking Compounds
Ammunition Paints
Plus Many Special Products for the Army and Navy

Our Engineering, Technical, and Laboratory facilities are at the service of any industry with a sealing problem.

PRESSTITE ENGINEERING CO., 3910 Chouteau Avenue, St. Louis 10, Mo.

10 REASONS

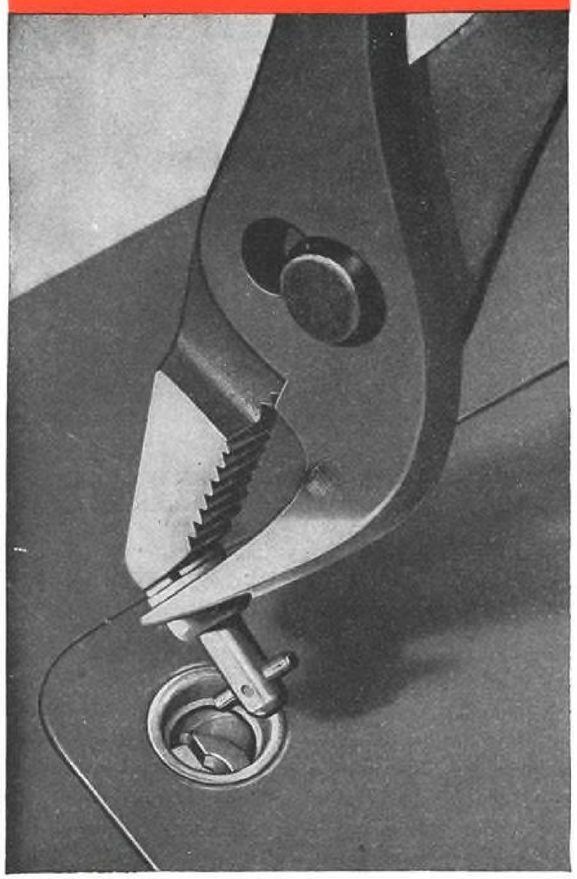

No. 1—UNIT STUD ASSEMBLY

There are ten important reasons for the selection of Camloc fasteners. One of these is the stud assembly which can be changed as a unit without removing the panel. In both installation and service, this distinctive Camloc feature reduces hours to minutes.

Watch these pages for the other nine reasons.

Camloc engineers will design a Camloc fastener to suit your needs. Write for catalog.

CAMLOC FASTENER CORP.
420 Lexington Avenue, New York 17
5410 Wilshire Boulevard, Los Angeles 36

CAMLOC
QUICK-ACTING FASTENERS

© Camloc Fastener Corp.




IRVIN Air Chute

"SINGLE-RELEASE" Harness

UNITED NATIONS' FLYERS *are using it for* SAFER LANDINGS

A one-hand turn and a tap on the single frontal disk instantly releases the harness . . . leaving the flyer entirely free. Accidental release is impossible before disk is "set" for action.

All United Nations' Air Forces for years have used IRVIN as standard equipment . . . and now the Irvin "Single-Release" harness is acknowledged as superior for all landings. IRVIN, as always, leads in Safety.

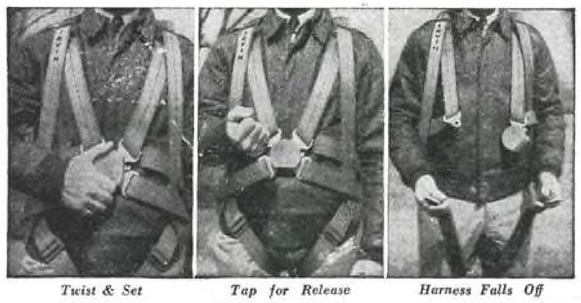

Twist & Set *Tap for Release* *Harness Falls Off*

IRVING AIR CHUTE CO., Inc.

Main Office: 1670 Jefferson Ave., Buffalo 8, N. Y.

Factories at other points in the United States, Canada and England . . . All Serving the United Nations' Air Forces.

BUY MORE BONDS

For "TOP-NOTCH" welding supplies *specify* AIRCO *materials!*

popular favorites for welding of aircraft parts, jigs, etc.



Airco No. 4 High Tensile Steel Rod
A high test rod that produces welds of high physical properties. Available in 1/16", 3/32", 1/8", 3/16", and 1/4" sizes—36" lengths.

Airco No. 25 Drawn Aluminum Rod
Ideal for welding sheets of the common aluminum alloy compositions. Made in 1/16", 3/32", 1/8", 3/16", and 1/4" sizes—36" lengths.

Airco No. 26 Drawn Silicon-Aluminum Rod
Made of 5% silicon and 95% aluminum, for welding aluminum and silicon-aluminum alloy products. It is particularly adaptable for welding aluminum regardless of composition where parts are held tightly in jigs. Available in 1/16", 3/32", 1/8", 3/16", and 1/4" sizes—36" lengths.

Napolitan Sheet Aluminum Flux
Superior, economical flux for welding sheet aluminum and cast aluminum. Melts at right heat for ideal fluxing action—about 1060° F.

Save buying time—use AIRCO'S illustrated price list of gas and arc welding supplies

This handy booklet gives full details on Airco's comprehensive line of accessories for every gas and arc welding need. Rods, fluxes, brazing alloys, hose, goggles, gloves, and many other welding essentials are listed with prices, sizes, and shipping details. Mail the coupon for your free copy.

If you also want facts on Airco Electrodes, indicate request for Airco's Electrode Price List.



Air Reduction Sales Co.
60 E. 42nd St., New York 17, N.Y.

Please forward as soon as possible:

☐ Airco Gas and Electric Supplies Price List.
☐ Airco Electrode Price List.

Name.....
Company.....
Address.....
City..... State.....

★ BUY UNITED STATES WAR BONDS ★

AIRCO

AIR REDUCTION

General Offices: 60 East 42nd Street, New York 17, N. Y.
In Texas: Magnolia Airco Gas Products Co. General Offices: Houston 1, Tex.
Offices in all Principal Cities



Official U. S. Marine Corps Photo

Keep Your Plant's Quota "OUT FRONT!"

Victory depends upon materials—as well as men! To keep our American forces "closing in" overseas, you and every other manufacturer here at home must *keep on making* "Out Front" War Bond Quotas!

This means *action now* on every point in the fighting 8-Point Plan to step up Payroll Deductions. For instance, have you a 6th War Loan Bond Committee, representing labor, management and other important groups in your company? Selected Team Captains yet—preferably returned veterans? If so, have you instructed them in sales procedure—and given each the Treasury Booklet, *Getting the Order?*

How about War Bond quotas? Each department—and individual—should have one! Assigning responsibilities is vital, too! Have you appointed enough "self-starters" to arrange rallies, competitive progress boards and meeting schedules? Are personal pledge, order or authorization cards printed, and made out in the name of each worker? Planning for resolicitation near the end of the drive? Your State Payroll Chairman is ready now with a detailed Resolicitation Plan. And, have you contracted for space in *all* your regular advertising media to tell the War Bond story?

Your positive *Yes* to *all* points in this forward-to-victory 8-Point Plan assures your plant meeting an "Out Front" Quota in the 6th War Loan—and speeds the day of unconditional surrender!



The Treasury Department acknowledges with appreciation the publication of this message by

AVIATION

This is an official U. S. Treasury advertisement—prepared under the auspices of Treasury Department and War Advertising Council.



the Martin Mars means *Payload!*

World's greatest airmail load, these 25,000 pounds of mail were carried from Hawaii to California by the mighty Martin Mars a total of 62,500,000 pound miles for a single non-stop flight. At an average of ½ ounce per letter, that's 800,000 letters . . . and if they were all paid for at prevailing rates, they would carry $160,000 in postage.

This load not only smashed all previous records for airmail, but more than doubled the 23,750,800 pound miles traveled with the all-time cargo record of 35,000 pounds which the Mars carried from Belem, Brazil to Trinidad on its first war mission for the Naval Air Transport Service.

Thus in payload, as in economy of operation, the Mars far outstrips all rivals. And her 20 sisterships, now being built by Martin, will offer even greater payload, lower ton-mile costs, and higher speed. Best of all, war's end will find Martin production lines fully tooled and manned by experienced workers to assure early delivery of commercial versions of the Mars. It's no wonder the Martin Mars is known as "the answer to an airline's prayer!"

THE GLENN L. MARTIN COMPANY
BALTIMORE 3, MARYLAND, U.S.A.
The Glenn L. Martin-Nebraska Company—Omaha

Martin AIRCRAFT *Builders of Dependable Aircraft Since 1909*

"PARK" 3 SHIPS *in the Space of One!*





Locking plate used as ramp allows one man to easily load a light plane, two men for larger ships.



HELPING YOU PLAN AHEAD


This FREE handbook brings the "framework" on which to build a successful plan for your aircraft accessory business. Write for your copy.

. . . and Up Hangar Rental Space Threefold with


SCOTT HANGAR SPACE SAVERS

Scott (patented) Hangar Space Savers not only increase storage capacity but also simplify hangar "traffic." Ships are readily loaded by use of ramp bar, without strain on struts or spars. The stacked ships are completely stable, quickly moved into position for delivery to the field. Special gas caps available to prevent gas leakage on ships with wing tanks—other types involve no leakage problem. Scott Hangar Space Savers consist of two wheel bowls and nose cradle, sturdily constructed with large ball-bearing casters. Can be used on all types of personal aircraft. Prompt delivery from your Scott distributor.

Scott
AVIATION CORPORATION
Lancaster, N. Y., U. S. A.
214 Erie Street

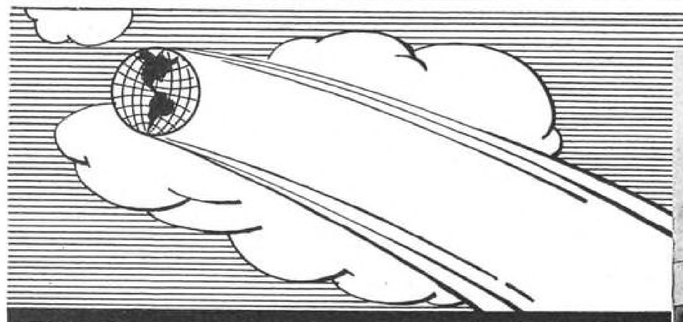

THE WORLD HAS SHOT A LONG WAY AHEAD!

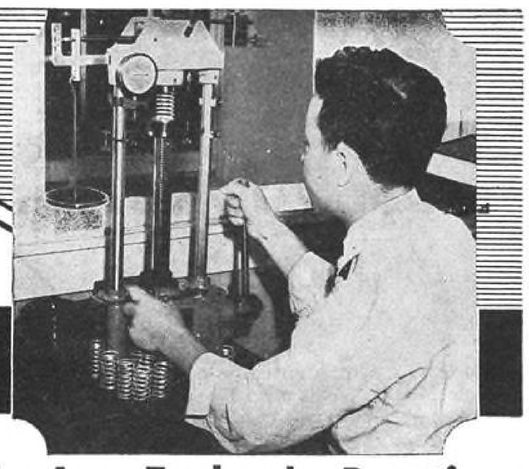

Many of *Tomorrow's* Methods Are Today's Routine


War's demand for high speed production and extreme precision has been a potent "school" for the advancement of industry. In this, "Peck Service" has benefited unusually well because of its three years of unremitting production of high grade springs and screw machine parts to Government specifications.

In planning your postwar program, we ask that you give this earnest consideration; and if in the meantime we can be of benefit to you in laying out your products, our engineers will be glad of the opportunity to help you.

Peck SPRINGS & SCREW MACHINE PRODUCTS

THE PECK SPRING CO., 30 SUMMIT ST., PLAINVILLE, CONN.

Have you thought enough about Cranes?

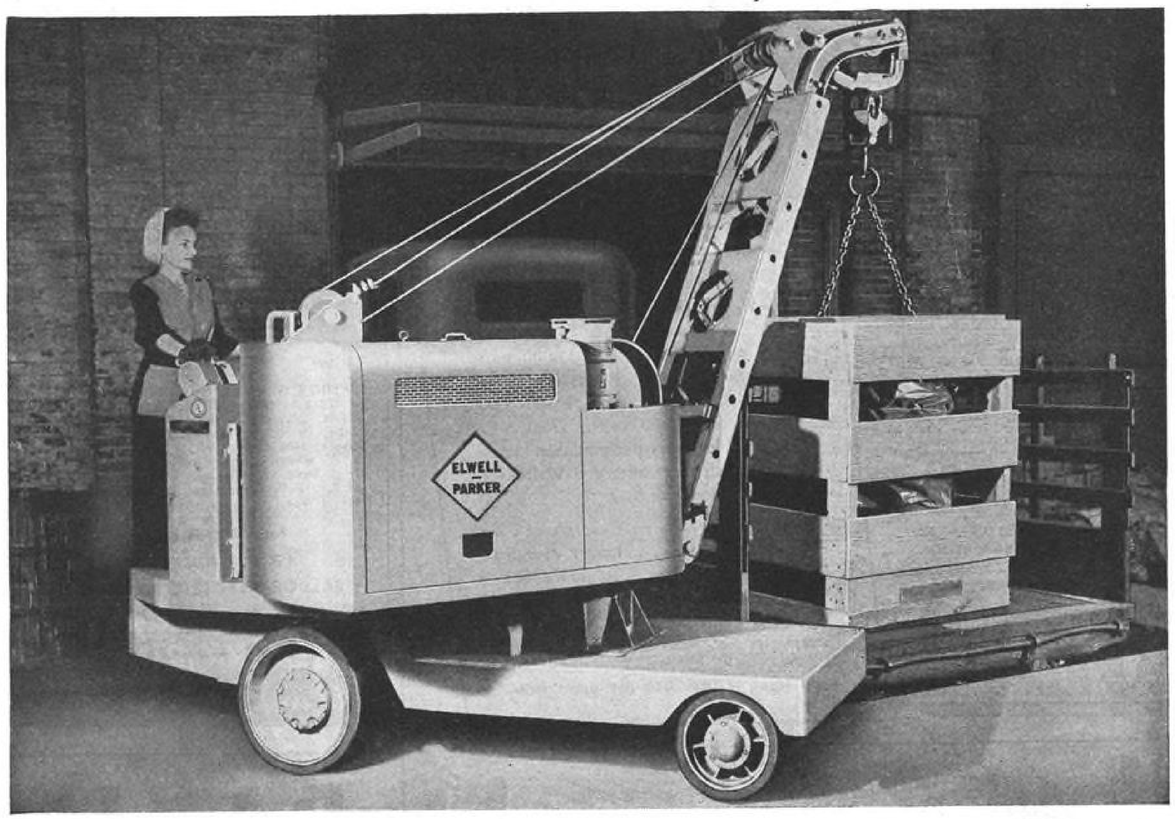



You can prove—with the E-P Man's Help—whether Cranes can bridge a Costly Gap in your Transportation Flow

The ideal plant transportation system—the one that keeps costs down by mechanizing and speeding the flow of materials—should first of all be flexible enough to insure the handling of all loads speedily, without waste. That is why Elwell-Parker builds Electric Mobile Cranes as well as Electric Trucks of many types.

Putting Elwell-Parker Cranes on your "hook" jobs may prove the means of eliminating present wastes and closing time-consuming gaps in the flow of your materials.

The Unit illustrated has telescoping boom for high lifts and will handle loads up to 3,000 pounds. You will be agreeably surprised to find how many plant and warehouse jobs it will efficiently take over for you.


The E-P Man—your long-experienced, versatile Transportation Advisor—will gladly help you to survey the need for Cranes in your plant. It will pay you to contact him. *Dial the E-P Man today.*

The Elwell-Parker Electric Company, 4125 St. Clair Avenue, Cleveland 14, Ohio.

ELWELL-PARKER
POWER INDUSTRIAL TRUCKS

ELECTRICITY

TO MEET AVIATION AND AIRCRAFT INDUSTRY POWER NEEDS

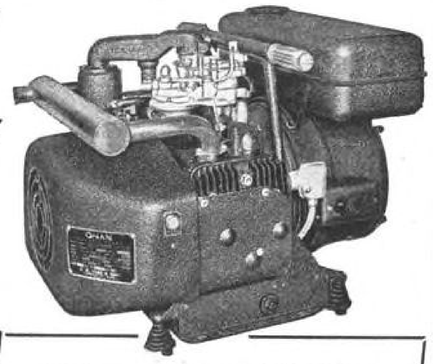

ONAN ELECTRIC GENERATING PLANTS provide reliable, economical power for many applications in the aviation industry. Available in 65 models including Airborne, lightweight, compact types. Powered by Onan-built gasoline engines, these electric plants are of compact, single-unit design. Built for heavy duty service, stationary or mobile.

•

Successfully used by Pan American Airways—Northwest Airlines—Western Airlines—U. S. Army Air Forces—Air Transport Command—Royal Canadian Air Force.

D. W. ONAN & SONS
3127 ROYALSTON AVE.
MINNEAPOLIS 5, MINN.

ELECTRIC PLANTS **Onan**
POWER AND LIGHT FOR EVERY NEED

350 to 35,000 WATTS

Sizes range from 350 to 35,000 watts. A.C. types of 50 to 800 cycles, 115 to 660 volts, one and three-phase. D.C. types of 6 to 4000 volts. Dual A.C.-D.C. combination types available. Engineering assistance offered. Write for descriptive literature.

Supply power for starter energizing . . . radio navigation . . . battery charging . . . communications . . . cabin heating . . . airport and general lighting . . . electrical repair tools . . . aircraft accessories . . . many other applications.

Model shown is from OTC light-weight series.

BALDOR
BALL BEARING **GRINDERS**

for HEAVY-DUTY Service



BALDOR GRINDER No. 7106, ball-bearing, and substantially built for heavy-duty, precision grinding; equipped with Capacitor Type, ½ h. p. Motor; (110 volts, single phase, 3400 r.p.m.) WON'T BURN OUT. 7" x 1" wheels; large, adjustable, cast iron Tool Rests. Net weight, 61 lbs. Fully Guaranteed for 1 year..... **$39.00**

Bench & Pedestal Types

ASK FOR BULLETIN 319

BALDOR ELECTRIC COMPANY
4380 Duncan Ave. St. Louis 10, Mo.

BALDOR GRINDERS
built by Motor Specialists

SENSENICH

We don't know exactly how it will look or what it will do. But if the past is any guide to the future, chances are that it will have a Sensenich Propeller.

Prompt repair service now available.



AIRCRAFT **SENSENICH** PROPELLERS

Adjacent to Lancaster Municipal Airport, Lancaster, Pennsylvania—West Coast Branch, Glendale, California



ENLARGED FORGING FACILITIES


Expansion of our forging facilities now allows us to produce more and larger forgings to your specifications. We can offer almost immediate delivery of parts forged of steel, stainless steel, brass and monel metal.

Another outstanding Arcturus feature—our complete machine shop, combined with our enlarged forge plant, enables you to have your forgings machined complete—a big saving in time and transportation cost.

May we help you with your present and peace-time forging problems? Address your inquiries to

ARCTURUS MANUFACTURING CORPORATION
FORGE DIVISION
1620 EUCLID STREET
SANTA MONICA, CALIFORNIA

SAN FRANCISCO REPRESENTATIVE
ALAN P. CLINE, RIALTO BUILDING

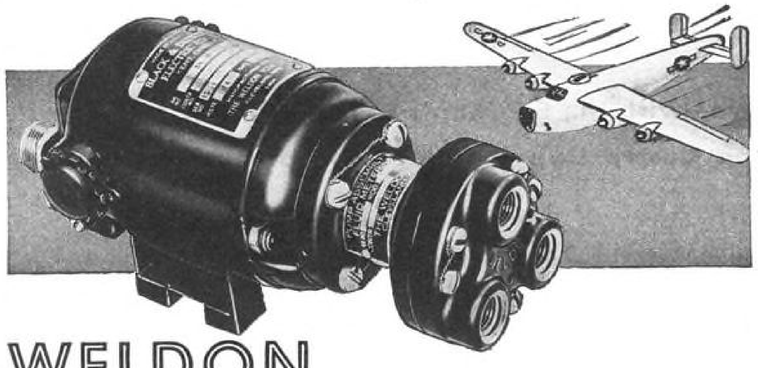

WELDON
FLUID METERING PUMPS


Weldon Pump Engineers invite your inquiries on problems involving

ACCURATE METERING OF SMALL VOLUMES OF

WATER
FUEL OIL
GASOLINE
ALCOHOL
LUBRICANTS
HYDRAULIC OIL
CHEMICALS
GASES

THE WELDON TOOL CO. *Cleveland 4, Ohio*
3000 WOODHILL ROAD

DANLY
PRECISION DOWEL PINS
STANDARD AND .001 OVERSIZE



Hardened and Precision ground to a tolerance of ± .0001 of an inch; Available in .001 oversize for repair or renewal work.

DANLY MACHINE SPECIALTIES, INC.
2100 South 52nd Avenue • Chicago 50, Illinois

Milwaukee.....111 E. Wisconsin
Detroit.....1549 Temple Ave.
Cleveland.....1550 E. 33rd St.
Dayton.....990 E. Monument
Rochester.....16 Commercial St.
Philadelphia....3858 Pulaski Av.
Long Island City..47-28 37th St.
Ducommun Metals & Supply Co.
4890 So. Alameda, Los Angeles

MERCURY AIRCRAFT

at *The Cradle of Aviation* HAMMONDSPORT, NEW YORK



Right on Time

The meeting or bettering of required delivery schedules is a habit at Mercury, made possible by a personnel skilled through long experience in building aircraft.

MERCURY AIRCRAFT INC.
AIRCRAFT SURFACES • FUEL TANKS
PARTS • ACCESSORIES
AT *The Cradle of Aviation*
HAMMONDSPORT • NEW YORK



MANY BENDING OPERATIONS NEEDED ... to build a BOMBER

Airplane structural specifications call for a multitude of pipe and tube bending operations in which Swan Specializes: among them engine ring mounts, landing gear forks, exhaust manifolds, carburetor insert tubes, directional finding loops, oil lines and hydraulic lines. Swan Engineering handles these and other close-tolerance pipe and tube bending jobs on a production basis, meeting rigid delivery dates. Swan's specialized plant facilities and modern streamlined production methods have effected savings in time and money for an impressive list of America's foremost plane manufacturers. Consult a Swan technician on *your* bending requirements! Our engineering department welcomes your special enquiries.

BENDING IS OUR BUSINESS

SWAN ENGINEERING COMPANY, Inc.

744 Frelinghuysen Avenue — Newark 5, N. J.

B-H

MANUFACTURERS OF SHEET METAL AND TUBULAR ACCESSORIES

OARS AND PUMPS

CONTRACTORS TO ALL LEADING ENGINE AND PROPELLER MANUFACTURERS

B-H AIRCRAFT CO., Inc.
LONG ISLAND CITY 1, N. Y.

ACCURACY PRECISION



MICROMETER CALIPER

- ★ Equipped with ratchet stop and locking ring.
- ★ Unit has ground finish and lapped threads.
- ★ Spindle and anvil are optically flat and parallel.
- ★ Quick, accurate, and lasting zero adjustments.
- ★ Available in 6 sizes. English or Metric.

Write today for the new McGrath precision tool catalog. Keep it in your file. Shows our complete line of instruments, including our new patented one hand operated LEAD SCREW HEIGHT GAGE which makes more accurate measurements in a fraction of the time.



Address: Room 211.

McGRATH ST. PAUL CO.
5th & WACOUTA STREETS — ST. PAUL 1, MINN.



JARO FABRY

"Here's your new copy of TRUE, Mr. Smithers—and I've cancelled all your appointments for this afternoon."

adv.

The Tubular MICROMETER

FEATHER TOUCH

Made in 89 Different Sizes and Types



SUPERIOR MICROMETERS for "PRECISION" MEASUREMENT.. A Tumico Tradition

The excellence in design and the sturdy construction you find in our Tubular Micrometers is the result of over thirty years of service to the industry. Today Tumico Micrometers enjoy the world wide acceptance of discriminating workmen.

PROMPT DELIVERY!

The Tubular Micrometer Company
St James Minnesota U S A

Simplifies Speeds **ENGINEERING PRODUCTION**

LOK-SKRU

Blind or Visible


RIVET OR ANCHOR NUT




1 Drill *ONE* Hole

2 Insert LOK-SKRU

(Types with flat, flush, countersunk or spacer head. Sizes as required for metal thickness and hole diameter.)



3 Riveted securely by drawing sleeve against inner side of metal with special power or hand tool.



4 Attachment fastened by screw locked in anchor nut.

Disassembled LOK-SKRU with screw for attachments





Write for Folder

Handy information on the many uses and application of Lok-Skrus in airplane construction with data on types and sizes.


THE DILL MANUFACTURING CO.

FACTORY	BRANCH
700 East 82nd St.	1101 S. Flower St.
CLEVELAND, OHIO	LOS ANGELES, CALIF.

THE AVIATION STANDARD FOR SCREW-LOCKING ANCHOR NUT USES AND METAL TO METAL RIVETING

DILL *Lok-Skru* FASTENERS

NEW! **Fibron THE "ALL-PURPOSE" Tape**

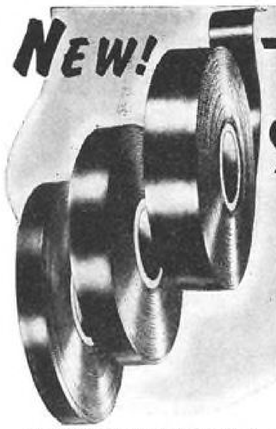

FOR INSULATING wires, cables and electrical equipment . . . **FOR PROTECTING** electrical wires and cables exposed to caustic or corrosive fumes, oil, grease, acids, alkalies, or moisture . . . **FOR SPLICING** cables with a continuous, protective covering . . . **FOR COVERING** exposed piping in chemical plants, equipment exposed to moisture or severe atmospheric conditions.

These widely diversified applications of FIBRON TAPE No. 1 are made possible by its combination of outstanding electrical, physical, and chemical properties. (See adjacent panel.) This *flexible, elastic,* "Vinylite"* resin tape is heat sealing, flame resistant, high in dielectric strength, strong mechanically, and highly resistant to oils, acids, alkalies, moisture, and normal variations in temperature and climate.

FIBRON TAPE is a new addition to the already extensive line of Irvington products. It is offered with the usual guarantee that applies to all Irvington Insulation — to protect equipment in accordance with specifications.

**Reg. Trade Mark—Carbide & Carbon Chemicals Corp.*

OUTSTANDING PROPERTIES FIBRON TAPE No. 1

Tensile strength	1700 lb. per sq. in.
Dielectric strength	1000 VPM (.012")
Low temperature flexibility	—40° C.
Elongation	250%—400%
Power Factor @ 30° C.	(60 cycles)—6.5% (1 kilocycle)—6.2%
Dielectric Constant @ 30° C.	(60 cycles)—7.6% (1 kilocycle)—6.9%
Bonding Temperature	Approximately 150° C.

IRVINGTON for INSULATION

Extruded Plastic Tubing
Insulating Varnishes
Varnished Paper
Varnished Cambric
Varnished Canvas and Duck
Varnished Tubing
Varnished Rayon
Varnished Fiberglass
Varnished Slot Insulation
Oil Stops
Varnished and Plastic Wire Markers

Plan now to test the new FIBRON TAPE. A generous sample will be sent on request — without obligation. For further information on FIBRON, or other IRVINGTON INSULATION, write Dept. 52.

IRVINGTON VARNISH AND INSULATOR COMPANY

6 Argyle Terrace, Irvington 11, New Jersey, U. S. A.
Plants at
Irvington, New Jersey and Hamilton, Ontario, Canada
Representatives in 20 Principal Cities

IRVINGTON *Electrical* INSULATION



BROWNSKIN GRIZZLYBEAR Scores Again!

A colorful folder showing how the Chrysler Corporation of Canada Ltd., protects their engines for export shipping has now been prepared. It tells the story of their use of A-19 Brownskin Grizzlybear to lick the problem of corrosion on overseas shipments.

Write today for your free copy of Folder BAV

ANGIER CORPORATION
CORROSION PREVENTIVE AND WATERPROOF PAPERS
FRAMINGHAM, MASSACHUSETTS

Angier

Cut Drying Time To a Fraction with NALCO *Infra-RedRay* Drying Equipment and Lamps



Leading airplane maintenance shops are using Nalco Infra-Red Ray Drying Equipment to solve a wide variety of problems . . . spot drying and baking of various finishes and dopes . . . quick drying of varnishes and impregnating materials for motor windings and electrical and mechanical parts of all types.



(Nalco 5-light portable adjustable unit)

There are many ways in which Nalco Infra-Red Ray Drying Equipment can save time in airplane maintenance — Why not investigate now? Write for your copy of "Drying Problems Made Easy" today.

NORTH AMERICAN ELECTRIC LAMP CO.
1006 Tyler Street St. Louis 6, Mo.



SCREWS

All kinds, sizes and shapes, standard and special designs. Contract and engineered screw specialties, precision made, economically produced.

NEW ENGLAND SCREW CO.
KEENE, NEW HAMPSHIRE

SHEET METAL SCREWS
MACHINE SCREW NUTS
MACHINE SCREWS
PLASTIC INSETS
HOLDING PINS
SPECIAL RIVETS
ALL TYPES OF HEADS AND THREADS

Solves the Problem of Mailing List Maintenance!

Probably no other organization is as well equipped as McGraw-Hill to solve the complicated problem of list maintenance during this period of unparalleled change in industrial personnel.


McGraw-Hill Mailing Lists cover most major industries. They are compiled from exclusive sources, and are based on hundreds of thousands of mail questionnaires and the reports of a nation-wide field staff. All names are guaranteed accurate within 2%.

When planning your direct mail advertising and sales promotion, consider this unique and economical service in relation to your product. Details on request.



McGraw-Hill Publishing Co., Inc.
DIRECT MAIL DIVISION
330 West 42nd St., New York, 18, N. Y.

As a bell-buoy warns of DANGER AHEAD...

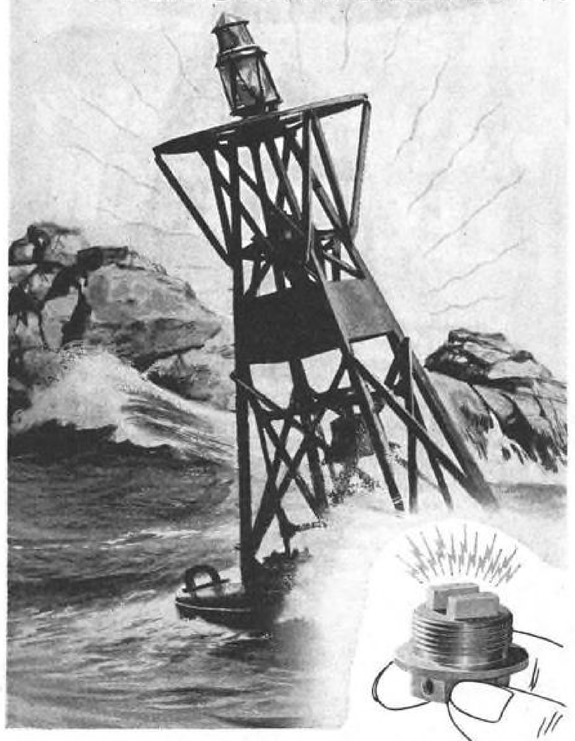

...a Lisle plug gives ADVANCE WARNING of aircraft engine wear!

Impending engine failure is often foreshadowed by the appearance of ferrous metal particles in the circulating lubricant. LISLE plugs immediately call attention to this hidden danger. The powerful magnet in LISLE MAGNETIC DRAIN PLUGS catches these abrasive steel cuttings — discloses the unseen danger before serious trouble can develop. Hundred of thousands of LISLE plugs are now providing this extra measure of safety in American aircraft. Investigate the advantages of this proven protection for your engines — specify LISLE plugs in place of ordinary drain plugs.

ENGINE DESIGNERS: Write for samples and application data. No obligation.

LISLE CORPORATION
Box 1020 Clarinda, Iowa

Lisle Magnetic DRAIN PLUGS

WHY IT WILL PAY YOU TO LET US...

1. CHECK Your FELT Specifications

Today a check on Felt specifications leads to improvement in many applications. Recent advances in Felt technology step up performance — cut costs — expedite post-war planning. Given specifications on any part, we can quickly determine the correct Felt to do the job most efficiently — and economically.

2. SET UP Your Standard Sample FELT File

Specifications are best understood when samples are at hand to see and feel. So specification Felt samples, as well as written specifications, should be on file in your Engineering Department, Buying Offices, Inspection Departments—and with all your Suppliers. You have only to give us a complete list of the Felts you use, and tell us the number of Sample Felt Files required, and we shall be glad to make these convenient files up for you.

American Felt Company
TRADE MARK

General Offices: GLENVILLE, CONN.

Sales Offices at: New York; Boston; Chicago; Detroit; Philadelphia; Cleveland; St. Louis; San Francisco; Dallas; Seattle; Los Angeles

PRODUCERS OF FINEST QUALITY FELT PARTS FOR OIL RETAINERS, WICKS, GREASE RETAINERS, DUST EXCLUDERS, GASKETS, PACKING, VIBRATION ISOLATION, INSULATION AND SOUND ABSORPTION FELTS

New McGraw-Hill Aviation Books



ESSENTIALS OF AERIAL SURVEYING AND PHOTO INTERPRETATION

By TALBERT ABRAMS,

President, Abrams School of Aerial Surveying and Photo Interpretation.

289 pages, 5 x 7⅝, 210 illustrations. $3.00

Designed to aid non-technical men in obtaining quick, effective mastery of the field, this book offers complete information on photo interpretation, necessary mathematics and surveying, mosaic map making, and the construction of relief models. Particularly valuable are the detailed chapters on mosaics and mechanical triangulation, as well as material on the tip and tilt graph. The step-by-step manner of presentation makes the book especially adaptable for self-study.

GENERAL METEOROLOGY

By HORACE R. BYERS

Professor of Meteorology, University of Chicago.

645 pages, 6 x 9, 284 illustrations, 27 tables. $5.00

Here is an all-inclusive, up-to-date treatment of meteorology. Covering the theory and practice of the science of weather analysis, it explains essential meteorological processes, radiation, observation, thermodynamics, dynamics, and modern meteorology. Written clearly and simply for those with no previous experience, it gives a complete understanding of basic principles and practical techniques leading up to forecasting and aeronautical applications. Latest developments in the field are fully covered.

AIR NAVIGATION MADE EASY

By JAMES NAIDICH

Chairman, Department of Mathematics, Manhattan High School of Aviation Trades. With the editorial assistance of Harry Schor, Polytechnic Institute of Brooklyn.

124 pages, 7⅜ x 10, 98 illustrations. $1.75

This book gives a clear, non-technical presentation of the air navigation needed by civilian pilots. Dealing with the two basic types of navigation, air piloting and dead reckoning, it shows how to read maps, fly by landmarks, measure direction, use the compass, correct for wind, plan a trip, and locate position in flight. Gives all the information necessary to pass the air navigation questions in the examination for private pilot's rating.

Griffiths—MATHEMATICS FOR AIRCRAFT ENGINE MECHANICS

By HAROLD GRIFFITHS

Instructor, Brazilian Division, Embry-Riddle School of Aviation.

366 pages, 5½ x 8½, 117 illustrations. $2.50

Here is an entirely practical book which gives you a thorough working knowledge of all the major types of aviation engines. Shows how to go about jobs involving engine accessories—propellers, spark plugs, carburetors, and superchargers. Over 2000 problems based on actual data and requiring only a knowledge of the basic essentials of mathematics are given.

McGRAW-HILL ON-APPROVAL COUPON

McGRAW-HILL BOOK CO., INC.
330 W. 42nd St., New York 18, N. Y.

Send me the books checked below for 10 days' examination on approval. In 10 days I will pay for books, plus few cents postage, or return them postpaid. (Postage paid on cash orders.)

- ☐ Abrams—Essentials of Aerial Surveying and Photo Interpretation—$3.00
- ☐ Byers—General Meteorology—$5.00
- ☐ Naidich—Air Navigation Made Easy—$1.75
- ☐ Griffiths—Mathematics for Aircraft Engine Mechanics—$2.50

Name .....

Address .....

City and State .....

Position .....

Company AV-11-44

NEW SENSATIONAL

PEN TYPE ETCHERS by LECTROETCH

The new pen type etcher is unquestionably the most advanced and most convenient etcher on the market today, designed especially to meet current inspection problems. We can furnish standard government inspection symbols to fit our pen type etcher such as: approval, deviation, salvage, magnaflux, etc.

Can be carried in your vest pocket, merely plug into socket and it is all set to mark metal parts of all kinds, shapes and sizes. As easy to hold, operate and carry as a fountain pen and what's more, it produces clean, sharp, legible characters in but a few seconds.


Lectroetch is an entirely different method of marking parts, there are no acids, stains or fumes, no burrs or surface deformations.

Whatever your "parts marking" problem is, Lectroetch has the answer in their complete line of exclusive patented units as shown below. Send for free literature.



THE LECTROETCH CO.
1727 DOAN CLEVELAND 12, OHIO


WHEELS THAT LEND WINGS!

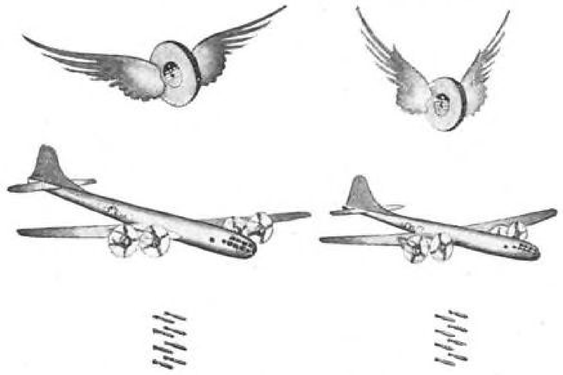

Faster, better BURRING, FINISHING, POLISHING operations (as on the close-tolerance parts illustrated) are multiplied many-fold in industry by Brightboy . . . versatility unheard of in finishing operations. The soft rubber, binding the evenly distributed abrasive, does it.

Ask your distributor or a Brightboy service representative how Brightboy can do your usual—and unusual jobs—present and planned-for. And ask for Brightboy prices, catalogs and production data.







Upper Left: Removing burrs, polishing base of elbow tube


Above: Removing burrs from inside of guide hole

Left: Control arm. Breaking flash, removing burrs, polishing shoulder

BRIGHTBOY INDUSTRIAL DIVISION
Weldon Roberts Rubber Co.,
Newark 7, N. J.



WELDON ROBERTS
Brightboy

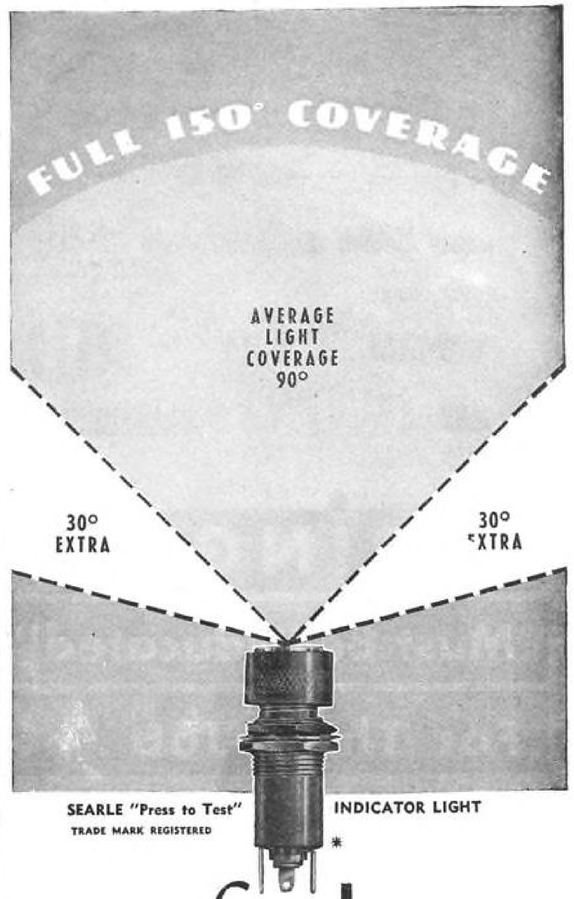

SEARLE "Press to Test" TRADE MARK REGISTERED INDICATOR LIGHT


ONLY A Searle LIGHT GIVES THE EXTRA 60°

The safety factor is highest in a Searle Indicator Light. Many outstanding, exclusive features are responsible. For example: Navy requirements set a minimum 90° angle at which the indication can be clearly seen. A Searle gives an EXTRA 60° or a FULL 150°. No other indicator light affords this advantage. Other exclusives with Searle are, its positive dimming feature for night flying, its volume light for daytime operations, its unique construction which permits use of either screw-base or bayonet type bulbs, both of which may be easily and quickly discharged by mere fingertip pressure. Made in diameters of ⅝". Can replace any ⅝" single hole mounting light. Write or wire for full details.

° U. S. PATENTS APPLIED FOR

Searle AERO INDUSTRIES

SEARLE AERO INDUSTRIES, INC. ORANGE, CALIF.

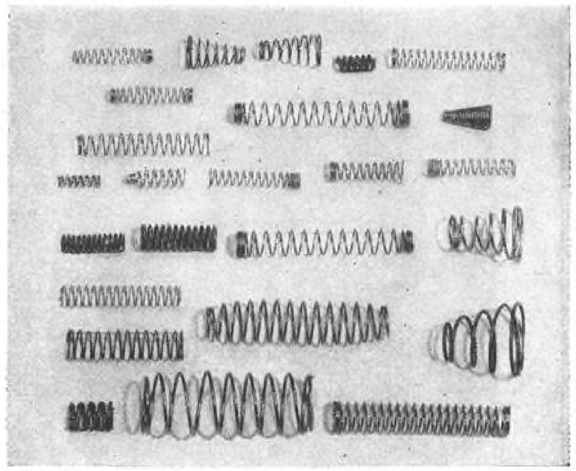

SPRINGS... Must Be "Educated" For Their Job...

Every problem of spring design and materials is a subject for engineering analysis. For example, when springs are to be used in electrically operated devices, they will cushion shock, or store energy, or exert force. This they must do accurately. Thus a good brush spring must not only keep carbon in contact with commutator, but also preserve a definite gradient, applying its force within *narrow limits*

Likewise where springs conduct electric current, the choice of proper material, such as beryllium copper or other copper alloys for certain functions, is of first importance for both conductivity and heat resistance. For satisfactory performance, engineer and manufacturer must consider the exact *application* of the spring in every detail. Reliable is equipped to give you the correct spring for the job.

Submit your spring needs to us.
Reliable catalog 44 supplied on request.

THE RELIABLE SPRING & WIRE FORMS CO.

3167 Fulton Road **Cleveland 9, Ohio**

Representatives in Principal Cities

YOU CAN RELY ON
Reliable Springs

MANHATTAN RUBBER PRODUCTS

protect men and equipment on world-wide airways

Engine Mounts, Hose, Radio Shielding Tubing, Connections for Push-rod Cover Seals, Air Intake Connections, Engine Baffle Seals, Molded Rubber Parts and many other MANHATTAN Rubber Products protect men and equipment. Natural and synthetic rubber products, specially engineered to meet specific applications, isolate vibration, resist action of aromatic fuel, oil, alcohol and low temperatures.

MANHATTAN Technicians are available for consultation with aircraft engineers. Write for information.

MANHATTAN PRODUCTS USED IN FABRICATION

52nd Year

Air Hose	Conveyor Belt
Paint Spray Hose	Other rubber products for plant maintenance
Welding Hose	
Abrasive Wheels	
Transmission Belt	Plane Fueling Hose

Keep ahead with MANHATTAN

THE MANHATTAN RUBBER MFG. DIVISION
OF RAYBESTOS-MANHATTAN, INC.
Executive Offices Passaic, New Jersey



WHEN bearings *must not fail* under extreme conditions of vibration and shock, specify Olds Bearing Bronze. This copper-nickel-lead alloy is used for aircraft controls, thrust washers, cowl flap bearings, landing gear operating nuts and instrument bearings.

PHYSICAL CHARACTERISTICS

Tensile Strength—psi	22,000
Tensile Yield Strength —at .35% set, psi	16,000
Compression Yield Strength at 35% set, psi	17,000
Elongation in 2"—%	3

Write for Bulletin of specifications, applications and stock sizes.

OLDS ALLOYS Company
8686 Rheem Ave., Southgate, Calif.
Suburb of Los Angeles

WEAPON FOR PRODUCTION

TUTHILL SMALL PUMPS DO BIG JOBS ON THE PRODUCTION LINE




Dependable Tuthill internal-gear rotary pumps are available in capacities from 1 to 200 g. p. m. and pressures up to 400 p.s.i. Write for General Catalog.

PUMPS for hydraulic mechanisms
PUMPS for lubrication
PUMPS for fuel delivery
PUMPS for liquid transfer
PUMPS for coolant service

TUTHILL PUMPS are serving Army • Navy • Air Force Merchant Marine and Industry

TUTHILL PUMP COMPANY
939 E. 95th St. • Chicago 19, Illinois



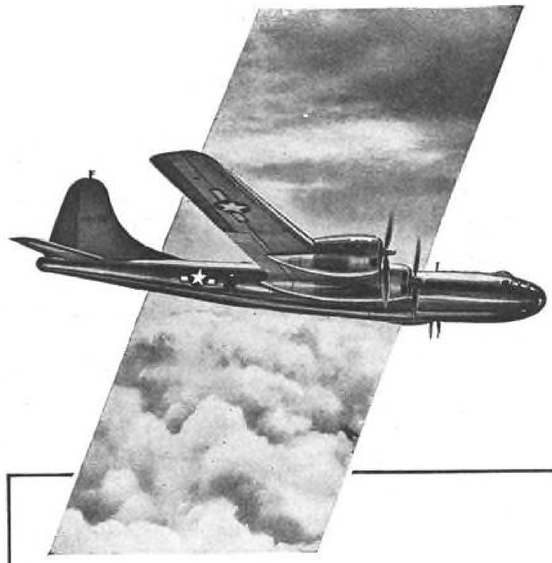

Introducing

TAYLOR PLASTICS TO TOKYO

via Boeing's B-29 Superfortress

Nineteen parts of the world's fastest and largest military aircraft are made of Taylor Phenol Fibre and Taylor Vulcanized Fibre. . . . It is especially significant that Taylor Laminated Plastics should be selected for the Superfortress, for the best engineering brains of the aircraft industry collaborated in its design. . . . You may be sure that the nineteen Taylor products were selected because there were nineteen jobs on this airplane that could not possibly be done better by any other available material.

Our experience in providing Laminated Plastics for the Superfortress and other newsworthy American fighting planes enables our engineers to step into *your* problems *at the blueprint stage* and make helpful, intelligent suggestions. Consult us freely and without obligation — *now*.


TAYLOR FIBRE COMPANY

LAMINATED PLASTICS: PHENOL FIBRE • VULCANIZED FIBRE
Sheets, Rods, Tubes, and Fabricated Parts

Norristown, Pennsylvania • Offices in Principal Cities
Pacific Coast Headquarters: 544 S. San Pedro St., Los Angeles

hi-g

LIGHTER IN WEIGHT
Down to 7 ounces
PROVED IN FIELD USE
4th Successful Year
WIDE SELECTION
To Meet any Need

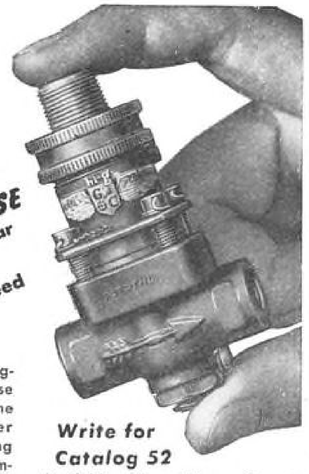

General Controls' hi-g electro-magnetic valves assure quick response in cabin heating, anti-icing, engine priming, fuel shut-off, propeller feathering, wing flap and landing gear control. Used with engine temperature control for both air and liquid cooled engines.

Unaffected by severe vibration. May be engine-mounted with acceleration factors up to 100 or more "g's"; will operate in any position regardless of vibration, change of motion or acceleration. Available for all types of service such as control of aromatic or domestic gasolines and vapors, air, steam, water, anti-icing fluids, and hydraulic and lubricating oils, 3,000 lbs. or more pressure.

Write for Catalog 52

Available with metal or soft seats to fit any specific condition. Packless, two-wire, current or non-current failure, normally open or closed. May be furnished with various port sizes.

hi-g valves are adaptable to tanks, tractors, trucks, buses, locomotives, ships, graders, construction and other mobile equipment. Also stationary equipment such as machine tools, hydraulic presses, diesel and gasoline engines.

GENERAL CONTROLS
801 ALLEN AVENUE • GLENDALE 1, CALIFORNIA
Branches: Boston • New York • Philadelphia • Cleveland • Detroit
Chicago • Dallas • Denver • San Francisco

EXPERIMENTAL WORK ON *New* POSTWAR PRODUCTS!



WE are now in a position to accept a limited amount of experimental work on postwar products, as well as machining of delicate parts to superfine precision tolerances. If you have work of this character—

● *Write Us Concerning Your Requirements!*

GOVRO-NELSON CO.
1931 Antoinette, Detroit 8, Mich.

PRECISION *Machining*

What Makes A Mailing *CLICK?*

Direct Mail Division



Advertising men agree—the list is more than half the story.

McGraw-Hill Mailing Lists, used by leading manufacturers and industrial service organizations, direct your advertising and sales promotional efforts to key purchasing power. They offer thorough horizontal and vertical coverage of major markets, including new personnel and plants. Selections may be made to fit your own special requirements.

New names are added to every McGraw-Hill list daily. List revisions are made on a twenty-four hour basis. And all names are guaranteed accurate within two per cent.

In view of present day difficulties in maintaining your own mailing lists, this efficient personalized service is particularly important in securing the comprehensive market coverage you need and want. Ask for more detailed information today. You'll probably be surprised at the low over-all cost and the tested effectiveness of these hand- picked selections.

McGraw-Hill Publishing Co., Inc.
330 West 42nd Street *New York, 18, N. Y.*

6th WAR LOAN

DUE TO LAND NOVEMBER 20!

HOME OF THE
Hotel Hawaiian Room
Lexington
CHARLES E. ROCHESTER,
Vice-Pres. and Mng. Dir.
LEXINGTON AVE. AT 48th ST., N.Y.C., 17

AIRCRAFT TURNBUCKLES to meet "AN" STANDARDS



Precision made by new production methods, resulting in substantial savings in critical material and machine time.

Available in a range of sizes.

RELIABLE ELECTRIC COMPANY
3145 Carroll Avenue
Chicago 12, Illinois

Dustproof & Drawn

HOW TO HANDLE AVIATION ENGINES



Handle the engine *ONCE* . . . KRANE KAR lifts, transports, and positions the engine in moving it from fixture to fixture, placing it on the test stand, or hoisting it into the plane. Handles loads at sides as well as the front. 2½, 5, and 10 Ton Cap.

Users —

Curtiss-Wright, Boeing, Bell, Republic, Consolidated, Lockheed, Douglas, Grumman, Eastern, North American, etc.

Send for Literature

See our Exhibit at the POWER SHOW, Madison Square Garden, N. Y. —Space 628—Nov. 27 to Dec. 2, 1944

Krane kar
SILENT HOIST WINCH & CRANE CO.
846 63rd ST., BROOKLYN, N.Y.

"A guide to the shape of things to come." — *AMERICAN AVIATION*

● A big, illustrated book about the passenger and freight carriers of the world — U.S.A., British, Russian, French, German, Italian. Authentic new photos and cut-away drawings of models still on the drafting tables. Size 8½" x 11¼".

162 pictures and 112 pages exclusively on

TRANSPORT AIR-CRAFT OF THE WORLD

PRESENT AND FUTURE



By LESTER OTT *author of Aircraft Spotter*

To your bookseller, or
FRANKLIN WATTS, Inc.
285 Madison Ave., N. Y. 17, N. Y.
Send me ..... copies of **Transport Aircraft of The World,** [$2.50 ea.] ☐ I enclose $.....
Name .....
Address .....S



WAITING FOR THE SHIFT . . .

Like every other long established manufacturer, Diefendorf is waiting for the word . . . the word that will come with V-E Day — "Convert".

In the meanwhile—we are in consultation with engineers who are thinking now of the gearing problems "Shift" day will bring.

DIEFENDORF GEAR CORP. SYRACUSE, N. Y.

diefendorf GEARS

Changed your ADDRESS?

Let us know so that we can keep copies of Aviation coming promptly.

TO: Circulation Dept., Aviation 330 West 42nd Street, New York 18, N. Y.

Name .....
Old Address .....
New Address .....
Company .....



PRECISION

DIE MAKING MACHINERY

Two companion machines that far outrange in versatility and ease of operation any combination unit. The Grob Band Saw and the Grob Filer embody exclusive principles of design and construction not found in any other single machine. Write us for details which prove their place in your plant.

GROB BROTHERS GRAFTON, WISCONSIN

STAMPINGS

Over 40 years experience.

Literature on request

WHITEHEAD STAMPING CO.


Est. 1903

1655 W. Lafayette Blvd. • Detroit 16, Mich.

DYKEM STEEL BLUE

STOPS LOSSES

making dies & templates



simply brush on right at the bench; ready for the layout in a few minutes. The dark blue background makes the scribed layout lines show up in sharp relief, and at the same time prevents metal glare. Increases efficiency and accuracy.

Write for full information

THE DYKEM COMPANY, 2303-A North 11th St., St. Louis 6, Mo.

In Canada: 444 Pacific Ave., Toronto, Ont.

WILLIAMS

SUPERIOR DROP-FORGED TOOLS

DROP-FORGINGS

ANY SHAPE–ANY MATERIAL

COMPLETE FACILITIES

Write today for helpful Forgings Data Folder

J. H. WILLIAMS & CO. *"The Drop-Forging People"* Buffalo, N.Y.



JACOEL
Splicing Tool
No. 10

Full swivell especially designed for splicing aircraft control cables. Will accommodate thimbles or bushings up to 3/16 inch in diameter of cable.

Jacoel Cable Splicing Equipment Co.
1514 Main Street
Buffalo 9, N. Y.

WHERE TO BUY

NEW EQUIPMENT — ACCESSORIES — MATERIALS — SUPPLIES



PLASTICLEAR CLEANER

cleans and polishes all types of clear plastics, such as Plexiglass, Lucite, acetate, nitrates; removes grease, dirt, bugs; and prevents new foreign matter from adhering to the plastic surface. Also cleans, polishes, and protects all types of chrome and painted surfaces (such as varnished surfaces of propellers), removing rust, stains, and restoring original brilliance. Clearer vision is safer vision.

PLASTICLEAR SUPER-HARD WAX

seals and protects any plastic or painted surface. Easy to use—just apply it, wipe it, and it's done. Leaves a high-melting-point, microscopic, super-hard, transparent film that prevents sun's rays from injuring plastic, thus preserving the clarity. Protection is afforded by perfect bonding of the film to the cleaned surface. Can be applied to all types of painted surfaces. The film is impervious to gasoline, oil, and salt water. Write on your letterhead for a generous sample.



L. W. FERDINAND & CO. INC., Newton Lower Falls 62, Mass.

ALLEN REG. U.S. PAT. OFF.

Specializes in Solders Fluxes, Welding Brazing Compounds

SILVER SOLDERS & FLUXES

L. B. ALLEN CO., INC.


6753 Bryn Mawr Ave. Chicago 31, Illinois

STANDARD AIRCRAFT FINISHES

Since 1913

TITANINE

TITANINE INC. UNION, N. J.

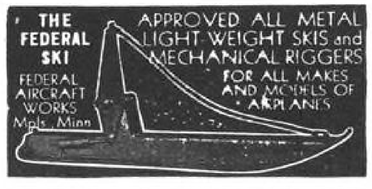

GOULD AIRCRAFT BATTERIES

Custom built with mass production precision



ENGINEERS are invited to consult us for design and other special services . . .

GOULD STORAGE BATTERY CORPORATION • DEPEW, NEW YORK

It's a permanent part of our gaging routine — COMTORPLUG



This precision gage is now Standard Practice

COMTORPLUG

Patented Expanding Internal Comparator



Sizes: ¼" to 7" dia. and larger

It's versatility demonstrated by war's urgency, Comtorplug is now a permanent part of the gaging routine in many shops. Gages precision bores to fractions of .0001", detecting out-of-round, front or back taper, bell mouth, etc. Automatic features assure precision results by operator as well as inspector. Available for early delivery.

Request Bulletin 29

THE COMTOR CO.
Rumford Ave.
WALTHAM, MASS.

FITZGERALD GASKETS

FOR AIRCRAFT ENGINES

GASKET CRAFTSMEN FOR 38 YEARS

Write for information

THE FITZGERALD MANUFACTURING COMPANY

TORRINGTON, CONN.


BRANCHES CHICAGO AND LOS ANGELES

CANADIAN FITZGERALD, LTD., TORONTO

FITZGERALD GASKETS

Wall Map or Postage Stamp Size . . .

SIMPLE DRAWINGS or COMPLEX ISOMETRICS

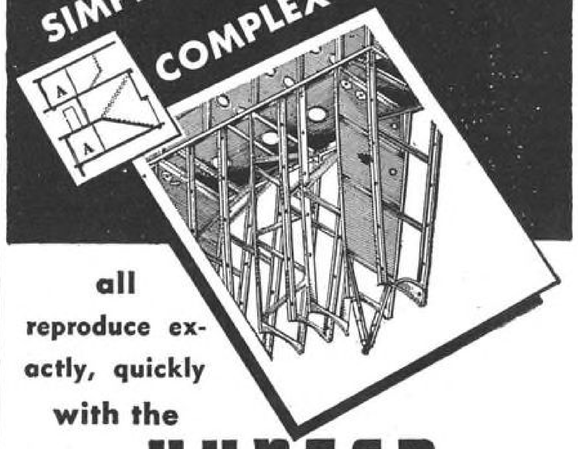

all reproduce exactly, quickly with the

HUNTER *Electro*-COPYIST

Quality reproduction—that's the Electro-Copyist. Close parallels don't fill up, concentric circles have separation, fine lines don't burn out, variations of cross-hatching show clearly—that's quality reproduction. And again we say, that's the Hunter Electro-Copyist—especially if used with the Hunter Hecco-Dyzed papers. If your reproduction work is not up to these high standards, let the pioneers of the photo-copy process show you how easy it is to obtain more sharply defined negatives and clearer, more uniform prints the Electro-Copyist way.



FLOOR MODEL
In three standard sizes

Only the Electro-Copyist offers a model for every engineering use, from the small portables to units especially developed for the aviation industry, that will take originals 48" x 168", or dozens of conventional size drawings at once.



WRITE FOR BOOKLET

Many suggestions to speed up drafting room work are explained in this booklet. Send today for complimentary copy.

HUNTER ELECTRO-COPYIST, INC.
480 S. Warren St., Syracuse 2, N. Y.

PRODUCTION ENGINEER

WANTED

Tool designer with tool planning ability. Capable of setting up a Production Engineering section of Small Aircraft Plant, including manufacturing methods, procedures and routing systems. 25 to 35 years of age. Apply

P-890, Aviation
68 Post Street, San Francisco 4, Calif.

PILOT WANTED

Private concern wants pilot with multi-engine experience and technical bent, able to evaluate the performance of accessories and contribute to fight-testing of communication and navigation equipment. Excellent post-war future with an organization which has an outstanding record of pre-war and wartime achievement in this field. Write fully, giving rating, hours, age, draft status, compensation desired and all other particulars. Must comply with W.M.C. regulations.

COLLINS RADIO COMPANY
Cedar Rapids, Iowa

Aircraft Men Wanted

DESIGNERS
LAYOUT MEN
DRAWING CHECKER

with aircraft engineering experience
Engineering Mathematician

Jobs immediately available for men to work on high output aircraft engine. A long range project of a rapidly expanding department of an old established company.

P-885, Aviation
520 North Michigan Ave., Chicago 11, Ill.

DESIGN ENGINEER

FOR AIRCRAFT GEARING

The gear manufacturing division of an old, established concern, located in Pittsburgh will consider for placement a qualified gearing apparatus design engineer, who has specialized in the design of various types of aircraft gears and component parts.

Write stating experience, qualifications, and present status.

Enclose photograph.

P-886, Aviation
330 West 42nd St., New York 18, N. Y.

AVIATION'S MARKET PLACE

CLASSIFIED ADVERTISING

USED PLANES, ENGINES AND PARTS FOR SALE, TRADE OR WANTED SPECIAL SERVICES OF DISTRIBUTORS, FIXED BASE OPERATORS, ETC. (Sales and Service—Storage—Repairing—Charter—Aerial Towing or Exhibitions—Special Instruction)

EMPLOYMENT — SELLING — BUSINESS OPPORTUNITIES: OFFERED OR WANTED

RATES: UNDISPLAYED, 10 cents a word, minimum $2.00. (Position Wanted: ½ the undisplayed rate; box number counts as 4 words.) DISPLAYED $7.25 per inch. Contract rates on request.

Address AVIATION "Classified", 330 W. 42nd St., New York, N. Y.
Phone: MEdallion 3-0700—Ext. 554

NEW ADVERTISEMENTS received by November 20th will appear in the December issue within space limitations

WANTED
PROJECT ENGINEER

Responsible position with well-established manufacturer on Layout and Design of Electric Actuators, Motors and Equipment. Give full qualifications and salary expected. All replies held in confidence. Send recent photo.

P-884, Aviation
520 North Michigan Ave., Chicago 11, Ill.

POSITIONS VACANT

IMMEDIATE COMMERCIAL airline positions are available for aeronautical, mechanical and electrical engineers; specialists in aero-dynamics, structures, weight and balance; draftsmen. Experience with aircraft necessary. State qualifications in letter. P-891, Aviation, 520 N. Michigan Ave., Chicago 11, Ill.

POSITIONS WANTED

PILOT, WORLD War II veteran, desires position in aviation operations or as pilot. Private party or industry. Have 2000 hours piloting twin-engine bombers and fighters, no accidents. Held duties of squadron commander and group operations. In Army five years. Graduated Kelly Field 1939. Rank, Major. Age 27. Health excellent. Married. Overseas 3 years. Experienced in testing and developing airplanes. Capable and aggressive. PW-892, Avation, 520 N. Michigan Ave., Chicago 11, Ill.

LABOR AND Industrial relations executive, ten years experience. Knowledge of regulations and policies of Government labor and employment agencies. PW-893, Aviation, 330 W. 42nd St., New York 18, N. Y.

AERONAUTICAL ENGINEER, varied design experience. Pilot. Familiar light plane field. Development and sales engineering aircraft accessories. Desire responsible engineering position California. PW-894, Aviation, 330 W. 42nd St., New York 18, N. Y.

REBUILDING

AIRCRAFT BATTERIES rebuilt. New Plates and separators. Your case cover and costs. Let us quote. Bowers Battery Mfg. Co., Inc., Reading, Pa.

FOR SALE

PARACHUTES FOR SALE: All types new and used. Joe Crane & Company, 99 Main Street, Mineola, L. I., New York, Garden City 5379.

NEW TIRES: 8.00x4, 6.00x6, 7.00x4, 4-ply $11.75. Tubes $3.25. We wholesale and carry large stocks. Propellers, spark plugs, batteries, tail-wheel assemblies, windshield pyralin, dope, fabric. Bob Trader Aero Supply, Muncipal Airport, Pittsburgh, Pa.

SENSITIVE ALTIMETERS, 20,000 ft., brand new, inspected and tested, U. S. Air Forces surplus, barometric adjustment, complete in original cartons, $1000.00 list less 40% while stock lasts. Air Transport Equipment, Garden City, N. Y., Manufacturers and Distributors of Aviation Supplies since 1920.

MAINTENANCE ENGINEER AND TRAINING SUPERVISOR

Will consider permanent position in any organization. Excellent references. Specialist in aircraft production line maintenance. Can interpret six languages.

PW-887, Aviation
330 West 42nd St., New York 18, N. Y.

PROFESSIONAL SERVICES

LANCASTER, ALLWINE & ROMMEL
Registered Patent Attorneys

Booklet — "General Information Concerning Inventions & Patents" and "Fee Schedule" sent without obligation.

Patents—Copyrights—Trade-Marks

Suite 452, 815—15th St., N.W., Washington 5, D. C.

DESIGN ENGINEER

WANTED

Young, progressive engineer. Design and *drafting* ability necessary. Interest and knowledge in light aircraft, structures, power plants or hydraulics and electronics desirable. Apply

P-888, Aviation
68 Post Street, San Francisco 4, Calif.

SALES ENGINEER

WANTED BY

Southern California light aircraft firm. A good engineer with executive ability desirable. Should be able to formulate a market research plan and organize a sales program for light aircraft and aircraft products. 25 to 35 years of age.

SW-889, Aviation
68 Post Street, San Francisco 4, Calif.

There's Added Profits for
AIRPORT OPERATORS
in stocking and retailing the top-name aircraft supplies distributed by Snyder. 3 convenient supply depots. Write—wire

SNYDER AIRCRAFT
CORPORATION
DENVER — 1525 Broadway
CHICAGO — Municipal Airport
COLUMBUS, OHIO — Sullivant Avenue Airport

ANODIZING OF ALUMINUM
HARD CHROMIUM
PLATING
Philadelphia Rust-Proof Co.
3217 Frankford Ave. Phila., Pa.

LEGAL NOTICE

STATEMENT OF THE OWNERSHIP, MANAGEMENT, CIRCULATION, ETC., REQUIRED BY THE ACTS OF CONGRESS OF AUGUST 24, 1912, AND MARCH 3, 1933

Of Aviation, published monthly at Albany, New York, for Oct. 1, 1944.

State of New York } ss.
County of New York }

Before me, a Notary Public in and for the State and county aforesaid, personally appeared Joseph A. Gerardi, who, having been duly sworn according to law, deposes and says that he is the Secretary of the McGraw-Hill Publishing Company, Inc., publishers of Aviation and that the following is, to the best of his knowledge and belief, a true statement of the ownership, management, etc., of the aforesaid publication for the date shown in the above caption, required by the Act of August 24, 1912, as amended by the Act of March 3, 1933, embodied in section 537, Postal Laws and Regulation, to wit:

1. That the name and address of the publisher, editor, managing editor, and business managers is: Publisher, McGraw-Hill Publishing Company, Inc.; Editor, Leslie E. Neville; Managing Editor, John Foster, Jr.; Business Manager, Andrew H. Martin; all of 330 West 42nd St., New York City 18.

2. That the owner is:
McGraw-Hill Publishing Company, Inc., 330 West 42nd Street, New York City. Stockholders holding 1% or more of stock: James H. McGraw; James H. McGraw, Jr.; James H. McGraw, Jr., Curtis W. McGraw and Edwin S. Wilsey, Trustees for: H. W. McGraw, J. H. McGraw, Jr., D. C. McGraw, C. W. McGraw; Curtis W. McGraw, Donald C. McGraw; all of 330 West 42nd Street, New York City; Edwin S. Wilsey and Curtis W. McGraw, Trustees for J. H. McGraw, 3rd, Madison, New Jersey; Mildred W. McGraw, Madison, New Jersey; Wilson C. Laucks, Spruce and Canal Sts., Reading, Pa.; Grace W. Mehren, 73 No. Country Club Dr., Phoenix, Ariz.; Margaret Stump, 1418 Rose Virginia Rd., Wyomissing Park, Reading, Pa.

3. That the known bondholders, mortgagees, and other security holders owning or holding 1 percent or more of total amount of bonds, mortgages, or other securities are: None.


4. That the two paragraphs next above, giving the names of the owners, stockholders, and security holders, if any, contain not only the list of stockholders and security holders as they appear upon the books of the company but also, in cases where the stockholder or security holder appears upon the books of the company as trustee or in any other fiduciary relation, the name of the person or corporation for whom such trustee is acting, is given; also that the said two paragraphs contain statements embracing affiant's full knowledge and belief as to the circumstances and conditions under which stockholders and security holders who do not appear upon the books of the company as trustees, hold stock and securities in a capacity other than that of a bona fide owner; and this affiant has no reason to believe that any other person, association, or corporation has any interest direct or indirect in the said stock, bonds, or other securities than as so stated by him.

J. A. GERARDI, Secretary.

McGRAW-HILL PUBLISHING COMPANY, INC.

Sworn to and subscribed before me this 28th day of September, 1944.

[SEAL] ELVA G. MASLIN
(My commission expires March 30, 1945)

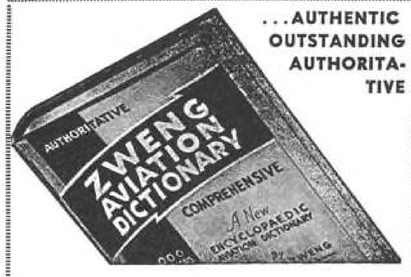

...AUTHENTIC OUTSTANDING AUTHORITATIVE

ENCYCLOPEDIC AVIATION DICTIONARY
by CHARLES A. ZWENG
Member, Institute of Aeronautical Sciences
Author of Radio & Instrument Flying, etc.

A new Enclyclopaedic Aviation Dictionary by the well known author—bristling with new aviation terms—and thousands of other words defined in ZWENG'S AVIATION DICTIONARY. The publishers congratulate the author for this, his latest contribution to aviation. This splendid volume is bound in maroon leatherette with gold lettering.

Price only $6.00 postpaid or C.O.D.

AIR NAVIGATION NOTE BOOK with (Weems) Mark II Navigation Plotter.....$4.00

AIRLINE TRANSPORT PILOT RATING (by Zweng). Covers all subjects on which the pilot is examined. Typical "multiple choice" examinations in the appendix. $4.00 postpaid or C. O. D.

PAN AMERICAN NAVIGATION SERVICE DEPT.-M
12021 Ventura Blvd., N. Hollywood, Calif.

New Dead Reckoning Equipment
For Defense of Land, Sea and Air

RADIO and INSTRUMENT FLYING: By Charles A. Zweng, Instructor, U. S. Air Corps. New 4th Edition covering new important material. Written especially to prepare the pilot for government examination for "instrument rating." Radio-Telephone Permit included with Meteorology, Radio-Orientation, let-down, off-course and alternate airport problems. Only $4.00 postpaid.

CELESTIAL NAVIGATION—complete equipment consisting of Air Navigation Note Book and Navigation Plotter, Simplified Celestial Navigation, Air Almanac Line of Position Book, and Illyness Star Chart; all 6 items only $11.75 postpaid or C.O.D.

AERONAUTICAL TRAINING. Just off the press. New enlarged edition. For the first time shows separate sections containing Typical Private Pilot and Commercial Pilot "Multiple Choice Examinations." $9.00 postpaid or C.O.D.

GROUND INSTRUCTOR. Written for the student preparing for "Ground Instructor Rating." Excellent for class work. Covers Navigation, Meterology, Aircraft and Theory of Flight, Engines and Civil Air Regulation, $3.00 postpaid or C.O.D.

GROUND INSTRUCTOR RATING. Just published. Contains Typical "Multiple Choice" examinations on Navigation, Meteorology, Aircraft and Theory of Flight, Engines and CAR. Nomenclature and aviation dictionary in back of book. It's new and different. Something you cannot afford to be without. $3.00 postpaid. Or it may be purchased in combination with "Ground Instructor" for $5.00.

AIRPLANE and ENGINE MECHANICS: Examinations. New authentic Quiz Book now covers the new Typical Multiple Choice examinations fully illustrated with necessary diagrams. Used by Lockheed, Douglas, Northrup, Ryan and outstanding schools. Why fail? Only $3.00 for both examinations and CAR.

Instrument Flying by Weems & Zweng..... 4.00
FLIGHT INSTRUCTOR Deluxe (by Zweng) Contains basic text and "Typical Multiple Choice Exams..$4.00
DALTON MK VIII NAVIGATION COMPUTER. 7.50
COX & STEVENS COMPUTER.....35.00

Celestial Air Navigation Training

Prepare now for this important phase of Air Defense. Our students are now air navigators and instructors in various quarters of the world.

Write for Information

AERO TRADES
COMPANY
Roosevelt Field, L. I.

EXPERIMENTAL WORK
MODIFICATIONS
Specialists in Manufacturers of Wood & Metal Airplane Parts
Government Approved Station 115

WANTED TO BUY
Beechcraft or Waco 4-5 place cabin in good condition. Minimum 350 horsepower. Wasp, Wasp Jr. or comparable power plant.
HARRY BRUNO
30 Rockefeller Plaza New York 20, N. Y.

WANTED AIRPLANE
Will Pay Good Cash Price
For Ercoupe.
***Contact* R. L. HULL**
1139 Spring St., N.W., Atlanta, Ga.
Phone Vernon 7703

WANTED
LUCITE OR PLEXIGLAS
Can use any quantity ¼" lucite or plexiglas first quality, second quality, or salvage. Wire or write what you can offer to
LORRAINE NOVELTY MFG. CO.
Bridgeport 5 Conn.

AVIATION SCHOOLS

AERONAUTICAL ENGINEERING
DEGREE IN 27 MONTHS
Qualify in Aeronautical Engineering at Indiana Tech. B. S. degree in 27 months. Competent instruction. Thorough, intense, practical program. New, modern Wind Tunnel. Prep courses without extra charge. Aeronautical industry rapidly expanding. Companies need engineers. Attractive appointments for Graduates. Government approved for G. I. bill. Enter Dec., March, June and Sept. Tuition and living costs low. Self-help opportunities. Also B.S. degree courses in 27 months in Chemical, Civil, Electrical, Mechanical and Radio Engineering. Catalog and list of successful graduates on request.
INDIANA TECHNICAL COLLEGE
1011 E East Washington Blvd., Fort Wayne 2, Ind.

SEE US FOR **Approved Repair Station 188**
INSTRUMENTS
NEW — USED — ALL TYPES — SALES — REPAIR — INSTALLATION — COMPLETE STOCK
STANDARD AIRCRAFT EQUIPMENT COMPANY
Hangar "D", Roosevelt Field, Mineola, L. I., N. Y. Garden City 8753

ADVERTISERS IN THIS ISSUE

Acme Aluminum Alloys, Inc. 271
Adel Precision Products Corp. 44
Aeronca Aircraft Corp. 283
Aeroproducts Insert 249
Aeroquip Corp. 202
Air Associates, Inc. 401
Aircraft Fitting Co., Inc. 363
Aircraft Standard Parts Co. 43
Air Reduction Sales Corp. 99-411
Albertson & Co., Inc. 395
Alexander Hamilton Institute, Inc. 305
Allen Co., Inc., L. B. 272-428
Allied Products Corporation 296
Allison Division 330
Aluminum Co. of America 218
American Broach & Machine Co. 186
American Chain & Cable Co., Inc. 196
American Felt Co. 421
American Magnesium Corp. 17
American Phenolic Corp. 354
American Screw Co. 34-434
Ampco Metal, Inc. 287
Anchor Post Fence Co. 28-29
Angier Sales Corp. 420
Apex Machine & Tool Co., The 379
Arcturus Mfg. Corp. 417
Arnolt Motor Company 274
Atlantic Screw Works 434
Autogiro Co. of America, The 331
Automatic Electric Sales Co 366
Automatic Products 383
Automatic Transportation 52
Automotive & Aircraft Div. of American Chain and Cable 196
Aviation Corp., The—Lycoming Division 32
Aviation Market Place 430-431

Baldor Electric Co. 416
Barber-Colman Co. 340
Barrett Equipment Co. 97
Bartlett Hayward Division 75
Behr-Manning Corp. 257
Bell Aircraft Corp. 18
Bellanca Aircraft Corp. 68
Bendix Aviation Corp. 4-106-353 Back Cover
Bendix Pioneer Instrument Back Cover
Bendix Products Corp. 106
Bendix Scintilla 4
Bendix Stromberg Carburetor 106
Berry Brothers 73
B. G. Corporation, The 53
B. H. Aircraft Co. 418
Blackhawk Mfg. Co. 348
Bliss Co., E. W. 78-79
Bolton Mfg. Co. 391
Bond Foundry & Machine Co. 291
Booth Felt Co., The 243
Boots Aircraft Nut Corp. 344
Bower Roller Bearing Co. Insert 193
Breeze Corp., The Insert 232
Briggs & Stratton Corp. 264
Bristol Company, The 228-434
Bryant Chucking Grinder Co. 63
Burndy Engineering Co., Inc. 24
Bush Mfg. Co., The 351
Butler Mfg. Co. 312

Cal-Aero Technical Institute 387
Callite Tungsten Corp. 289
Camloc Fastener Co. 410
Cannon Electric Development Co. 252
Carborundum Co., The 40-41
Cardox Corp. 367
Carpenter Steel Co., The 12-13-230
Celanese Celluloid Corp. 38
Central Screw Co. 434
Chambersburg Engineering Co. 318
Champion Spark Plug Co. Insert 194
Chance Vought Aircraft Front Cover
Chandler-Evans Corp. 326
Chandler Products Corp. 434
Cherry Rivet Co. 346
Chicago Wheel & Mfg. Co. 337

Cleveland Cap Screw Co., The 397
Cleveland Pneumatic Tool Co., The 94
Climax Molybdenum 240
Collins Radio Company 278
Comtor Co., The 429
Cone Automatic Machine Co., Inc. 321
Continental Screw Co. 434
Cook Electric Co. 293
Corbin Screw Corp. 434
Crescent Co., The 244
Crescent Truck Co. 295
Curtiss Wright Corp.-Airplane Division Insert 267
Curtiss Wright Corp.-Propeller Division Insert 231

Danly Machine Specialties, Inc. 416
Darnell Corp., Ltd. 263
Davison Chemical Corp., The 376
Dearborn Gage Co. 252
Delco Products 270
DeVilbiss Company, The 402
Diefendorf Gear Corp. 427
Dill Mfg. Co., The 419
Dixon Crucible Co., Joseph 406
DoAll Co., The 102
Dole Valve Co., The 328
Doolittle Radio, Inc. 347
Douglas Aircraft Co., Inc. 65
Dow Chemical Co. Third Cover
Dow Corning Corp. 208
DuPont de Nemours Co., Inc., E. I. 92-93
Dykem Steel Co., The 428
Dzus Fastener Co., Inc. 152

E. A. Laboratories, Inc. 45
Edo Aircraft Corp. 15
Elastic Stop Nut Corp. 51
Electric Auto-Lite Co. 226
Electric Storage Battery Co. 342
Electronic Laboratories, Inc. 22
Elwell-Parker Electric Co., The 415
Emerson Electric Mfg. Co., The 358
Engel Aircraft Specialties 314

Fairchild Camera & Instrument Corp. 281
Fairchild Engine & Airplane Corp. 236
Fawcett Publications 418
Federal Aircraft Works 428
Federal Bearings Co., Inc., The 37
Federal Telephone & Radio Corp. 82-206
Ferdinand & Co., Inc., L. W. 428
Firestone Industrial Products Co. 55-360-361
Fischer & Porter Co. 104
Fitzgerald Mfg. Co. 429
Flex-o-Tube Co. 59
Foote Bros. Gear & Machine Corp. 273
Fulmer Co., C. Allen 371
Fulton Sylphon Co., The 254

Garrett Co., George K. 300
Garrett Corp., The Insert 36
General Controls 426
General Electric Co.—Air Cond'g & Refgr. 238
General Electric Co.—Aircraft Instruments 31
General Electric Co.—Lamp 39
General Electric Corp.—X-Ray 345
General Screw Mfg. Co. 434
General Tire & Rubber 329

Globe Hoist Co. 256
Goodrich Co., The B. F. Insert 173-176
Goodyear Tire & Rubber Co. 8-9-10-11
Gould Storage Battery Corp. 428
Govro-Nelson Co. 426
Graybar Electric Co. 265
Greenfield Tap & Die 19
Greer Hydraulics, Inc. 375
Grimes Mfg. Co. 369
Grob Brothers 428
Grumman Aircraft Engineering Corp. Insert 268
Gulf Oil Corp. 388

Hall Mfg. Co. 336
Hansen Mfg. Co. 85
Harper Co., The H. M. 434
Harris-Seybold-Potter Co. Insert 250
Harrison Radiator Division 386
Hartwell Aviation Supply Co. 62
Heinemann Circuit Breaker Co. 58
Holo Krome Screw Corp., The 294
Holtzer Cabot Division, First Industrial Corp. 54
Homelite Corp. 349
Hotel Lexington, Inc. 427
Hunter Electro Copyist, Inc. 429
Hycar Chemical Co. 364

International Nickel Co., Inc., The 64-394
International Screw Co. 434
Interstate Aircraft & Engineering Corp. 27
Irvin Air Chute Co., Inc. 410
Irvington Varnish & Insulator Co. 419

Jack & Heintz 381
Jacobs Aircraft Engine Co. 74
Jacoel Cable Splicing Equip. Co. 428
Jones & Lamson Machine Co. 33

Keuffel & Esser Company 350
Kidde & Co., Inc., Walter 71
Kold Hold Mfg. Co. 299
Kollsman Instrument Co. 6
Kropp Forge Aviation Co. 101

Laminated Shim Co., Inc. 301
Lamson & Sessions Co. 434
Lear Avia, Inc. 100
Lectroetch Co. 422
Leland Electric Co., The 338
Liberty Mirror Division Libbey-Owens-Ford Glass Co. 306
Lincoln Electric Co. 334-335
Lincoln Engineering Co. 317
Linear Packing Co. 405
Lisle Corp. 421
Lockheed Aircraft Corp. Insert 87-90
Loew's, Inc. 382
Logan Engineering Co. 26

McDonald Mfg. Co., A. Y. 248
McDonnel Aircraft Corp. Insert 35

ADVERTISERS IN THIS ISSUE

McGrath St. Paul Co. 418
McGraw-Hill Book Co. 422
Magnaflux Corp. 355
Mallory & Co., Inc., P. R. 98
Manufacturers Screw Products 434
Manhattan Rubber Mfg. Division 424
Marman Products Co., Inc. 83
Martin Co., Glenn L. 413
Mercury Aircraft, Inc. 417
Meriam Instrument Co., The 389
Metal Specialty Co. 304
Micro-Switch Corp. 378
Milburn Co., The Alexander 425
Milford Rivet & Machine Co. 269-434
Minature Precision Bearings 275
Minnesota Mining & Mfg. Co. 280
Morganite Brush Co. 406
Muehlhausen Spring Corp. 408

National Machine Products 370
National Screw & Mfg. Co. 220-434
New Departure 198
New England Screw Company 420-434
New York Air Brake Corp., The 316
Nichols & Sons, W. H. 246
Norgren Company, C. A. 266
Norma Hoffman Bearings Corp. 307
North American Aviation, Inc. 372
North American Electric Lamp Co. 420
North Bros. Mfg. Co. 259
Northrop Aircraft, Inc. 277
Norton Company 25

Ohmite Mfg. Co. 310
Olds Alloys Company 424
Onan & Sons, D. W. 416
Owens-Corning Fiberglas Corp. 368

Packard Motor Car Company 373
Parker Appliance Co., The 357
Parker Kalon Corp. 282-434
Patent Scaffolding Co. 275
Pawtucket Screw Co. 434
Pease Co., The C. F. 204
Peck Springs Co. 414
Peerless Photo Products, Inc. 341
Perfect Circle Co., The 322-323
Permoflux Corporation 297
Pheoll Mfg. Co. 434
Phillips Petroleum Co. 60
Phillips Screw Manufacturers 434
Pioneer Parachute Co., Inc. 393
Piper Aircraft Corp. 7
Plomb Tool Co. 384
Plymould Corp. 315
Poulsen & Nardon, Inc. 105
Pressed Steel Co., The 276
Presstite Engineering Co. 409

Ramsey Accessories Mfg. Corp. 84
Reading Screw Co. 434
Reeves Brothers, Inc. 400
Refiners Lubricating Co. 292
Reliable Electric Co. 427
Reliable Spring & Wire Forms Co. 424
Remington Rand, Inc. 86-396
Republic Aviation Corp. 286
Republic Gage Co. 303
Revere Copper & Brass, Inc. 217
Reynolds & Reynolds Co., The 302
Righter Mfg. Co. 313
Roberts Rubber Co., Weldon 423
Roller Bearing Co. of America 365
Romec Pump Co. 77
Rotol Airscrews, Ltd. 352
Roxalin Flexible Finishes, Inc. 95
Russell, Burdsall & Ward Bolt & Nut Co. 434
Ryan Aeronautical Co. 319
Ryerson & Son, Inc., Joseph T. 247

Schatz Mfg. Co. 81
Schrader Sons Co., A. 390
Scott Aviation Corp. 414
Scovill Mfg. Co. 434
Searle Aero Industries, Inc. 423
Sensenich Brothers 417
Severance Tool Industries, Inc. 80
Shakeproof, Inc. 434
Sherman Mfg. Co., H. B. 245
Silent Hoist Winch & Crane Co. 427
Simmonds Aerocessories, Inc. 327
Simmons Mfg. Co. 288
Sinclair Refining Co. 309
SKF Industries, Inc. 374
Small Motors, Inc. 251
Snap-On Tools Corp. 298
Solar Aircraft Co. 30
South Bend Lathe Works 311
Southington Hardware Mfg. Co. 434
Spencer Thermostat Co 407
Sperry Gyroscope Co. 76
Spool Cotton Company 380
Square D Company 6
Staley Mfg. Corp. 284
Standard Aircraft Products, Inc. 56-57
Standard Conveyor Co. 285
Standard Pressed Steel Co. 404
Starrett Co., The L. S. 302
Steel Improvement & Forge Co., The 359
Stewart-Warner Corp. 222
Studebaker Corp., The 16
Sunnen Products Co 356
Superior Steel Corp 103
Superior Tube Company 46-47
Surface Combustion Company 20-21
Swan Engineering Co., Inc 418
Switlik Parachute Co. 324

Taylor Fibre Company 425
Texas Company 66-67
Thurston, Inc., Harris W. 332
Time, Inc. 399
Timken Roller Bearing Co., The 124
Timken Steel Division 333
Tinnerman Products, Inc. Second Cover
Titanine, Inc. 428
Titeflex, Inc. 42
Tobe Deutschmann Corp. 242
Torrington Company, The 14
Tube Turns, Inc. Insert 69-70
Tubular Micrometer Co. 418
Turco Products, Inc. 385
Turner Gauge Grinding Co. 260
Tuthill Pump Co. 425

Union Oil Company 50
United States Electrical Tool Co. 308
U. S. Rubber Company. Insert 211-24 & 279
U. S. Steel Corp.—Am. Steel & Wire 320

Vard, Inc. 224
Veeder-Root, Inc. 339
Vickers, Inc. 200
Vinco Corp. 91
Vokes, Ltd. 377

Waldes Koh-i-noor, Inc. 96
Walker Turner, Inc. 61
Walter Motor Truck Co. 398
War Savings Bonds 412
Watts, Franklin 427
Weatherhead Co., The 403
Weldon Tool Co. 416
Westinghouse Electric & Mfg. Co. 48-49-325
Weston Electrical Instrument Corp. 362
Where to Buy 428
Whitaker Cable Corp. 72
Whitehead Stamping Co. 428
White-Rodgers Electric Co. 234
Wiley & Sons, Inc., John 296
Williams & Co., J. H. 428
Wittek Mfg. Co. 23
Wolfshead Oil Refining Co., Inc. 262
Wolverine Bolt Co. 434
Wyman Gordon 255

Young Radiator Co. 258

Zephyr Mfg. Co. 261
Zimmer-Thomson Corp. 343

★ ★ ★

SCHOOLS

Indiana Technical College 431

AVIATION'S MARKET PLACE

(CLASSIFIED DISPLAY ADVERTISING)

BOOKS 431
EMPLOYMENT (Positions Wanted and Vacant) 430


FOR SALE 430, 431
PROFESSIONAL SERVICES 430

CLASSIFIED DISPLAY ADVERTISERS

Aero Trades Co. 431
Bruno, Harry 431
Collins Radio Co. 430
Hull, R. L. 431
Lancaster, Allwine & Rommell 430
Lorraine Novelty Mfg. Co. 431
Pan American Navigation Service 431
Philadelphia Rust Proof Co. 431
Snyder Aircraft Corp. 431
Standard Aircraft Equipment Co. 431

AS A WEAPON FOR KNOCKING PRODUCTION COSTS DOWN IT'S HARD TO MATCH THIS--> THE SCREW WITH THE ENGINEERED RECESS THAT STEPS UP SCREW DRIVING SPEED AS MUCH AS 50%

--->IT'S PHILLIPS

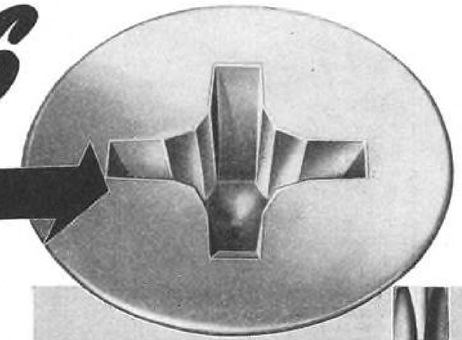

THE ENGINEERED RECESS

Right at your command is one of the most potent and efficient weapons for speeding up assembly and cutting costs that you could hope to find.

It's Phillip's – the Engineered Recessed Head for all kinds of screws.

It's the screw recess that eliminates fumbling, wobbly starts, slant driving, and dangerous skids – the troubles that have long made screw driving slow, awkward – and costly!

It's the screw recess that makes driving easier for workers – helps keep them going at top speed through a full shift.

It's the screw recess that lets you adopt spiral and power driving for assemblies where speed tools have never been practical.

Hundreds of plants have increased screw-driving speeds as much as 50% . . . and cut costs correspondingly . . . simply by switching to Phillips Recessed Head Screws. Can you do the same? Make the switch to Phillips Screws now – and you'll see. You'll see they cost *less* because they help you produce much *more!*



PHILLIPS *Recessed Head* **SCREWS**

WOOD SCREWS • MACHINE SCREWS • SELF-TAPPING SCREWS • STOVE BOLTS

TO MAKE WARTIME QUOTAS AND PEACETIME PROFITS

Faster Starting: Driver point automatically centers in the Phillips Recess . . . fits snugly. Fumbling, wobbly starts, slant driving are eliminated. Work is made trouble-proof for green hands.

Faster Driving: Spiral and power driving are made practical. Driver won't slip from recess to spoil material or injure worker. (Average time saving is 50%.)

Easier Driving: Turning power is fully utilized. Workers maintain speed without tiring.


Better Fastening: Screws are set-up uniformly tight, without burring or breaking off screw heads. The job is stronger, and the ornamental recess adds to appearance.



IDENTIFY IT!



Center corners of Phillips Recess are rounded . . . NOT square.



Bottom of Phillips Recess is nearly flat . . . NOT tapered to a sharp point.

24 SOURCES

American Screw Co., Providence, R. I.
Atlantic Screw Works, Hartford, Conn.
The Bristol Co., Waterbury, Conn.
Central Screw Co., Chicago, Ill.
Chandler Products Corp., Cleveland, Ohio
Continental Screw Co., New Bedford, Mass.
The Corbin Screw Corp., New Britain, Conn.
General Screw Mfg. Co., Chicago, Ill.
The H. M. Harper Co., Chicago, Ill.
International Screw Co., Detroit, Mich.
The Lamson & Sessions Co., Cleveland, Ohio
Manufacturers Screw Products, Chicago, Ill.
Milford Rivet and Machine Co., Milford, Conn.
The National Screw & Mfg. Co., Cleveland, Ohio
New England Screw Co., Keene, N. H.
Parker-Kalon Corp., New York, N. Y.
Pawtucket Screw Co., Pawtucket, R. I.
Pheoll Manufacturing Co., Chicago, Ill.
Reading Screw Co., Norristown, Pa.
Russell Burdsall & Ward Bolt & Nut Co., Port Chester, N. Y.
Scovill Manufacturing Co., Waterville, Conn.
Shakeproof Inc., Chicago, Ill.
The Southington Hardware Mfg. Co., Southington, Conn.
Wolverine Bolt Co., Detroit, Mich.



WE'VE BEEN ASKED THIS ABOUT MAGNESIUM:

Is magnesium well adapted to die casting?

Sound, strong die castings of the highest quality are produced from Dowmetal Magnesium Alloys. The advantages of die casting techniques, combined with the high strength-weight ratio of magnesium alloys, make possible products which are strong, lighter in weight, yet comparable in price with die castings in other metals.

This aircraft landing wheel is but one of the many instances where Dowmetal's die casting properties have proved outstanding.

The surface finish of Dowmetal die castings is excellent . . . thinner sections are possible than with sand or permanent mold castings . . . accuracy and close dimensional tolerances reduce machining to a minimum. Dowmetal's low cost in large-run production is likewise an important consideration.

Since 1916 Dow has been producing, alloying and fabricating magnesium. The benefits of the accumulated knowledge, as well as the facilities of Dow's own fabrication shops, are readily available to those interested in Dowmetal die casting as a means of improving their products. Inquiries are welcome.

DOWMETAL *magnesium*

THE METAL OF MOTION



MAGNESIUM DIVISION • THE DOW CHEMICAL COMPANY
MIDLAND, MICHIGAN

New York • Boston • Philadelphia • Washington • Cleveland • Detroit • Chicago • St. Louis • Houston • San Francisco • Los Angeles • Seattle

PIONEER POINTS THE WAY





Specify *The Gyro Flux Gate Compass*

for accurate indications in azimuth

Specifications for long-range aircraft call for the installation of the Pioneer Gyro Flux Gate Compass System because its master direction-indicator readings are steady and accurate in steep dives, fast turns, rough weather, or near the earth's poles. The Gyro Flux Gate Compass is a product of a great Creative Engineering team—a contribution of Pioneer's combined skills in mechanics, electro-mechanics, electro-magnetics, and electronics. . . . Month by month, as flying becomes safer, Pioneer points the way.

PIONEER INSTRUMENTS

Bendix, Pioneer, Gyro Flux Gate are trademarks of Bendix Aviation Corporation

ECLIPSE-PIONEER DIVISION
Teterboro, N. J.

Bendix
AVIATION CORPORATION