
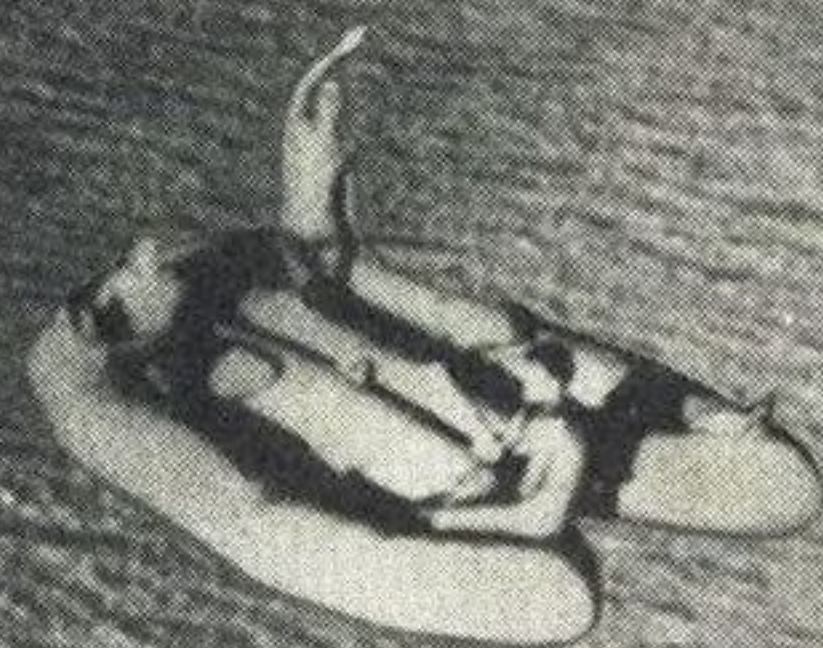


AVIATION WEEK

DEC. 4, 1950

\$6.00
A YEAR

A MCGRAW-HILL PUBLICATION

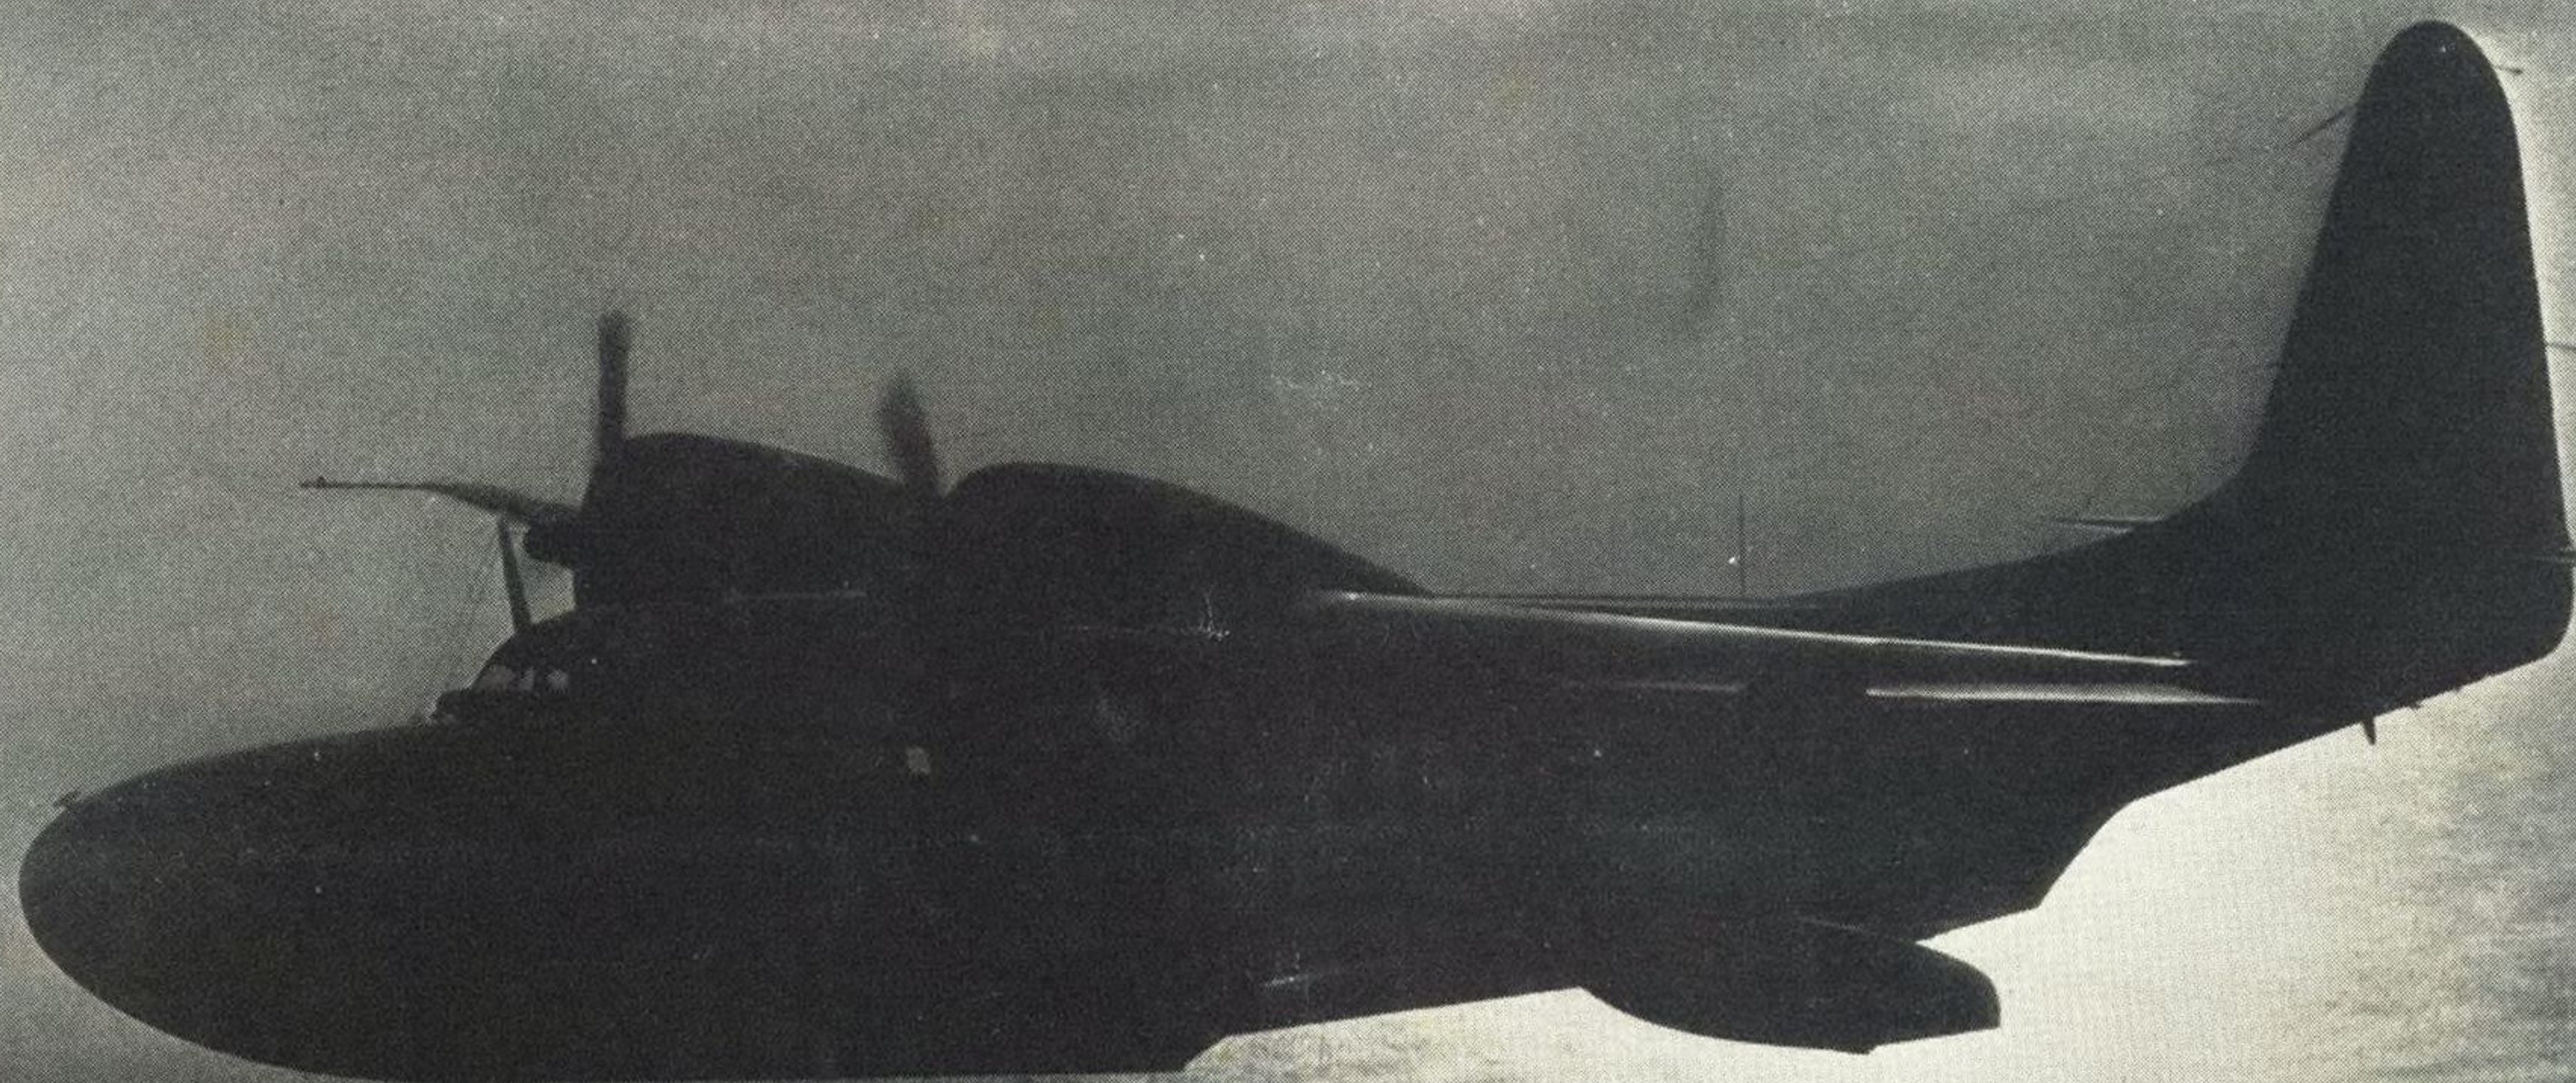

These are the words a pilot used to describe the GRUMMAN ALBATROSS which had just picked him up from the sea. His sentiment is shared by other fliers, too, for in the months it has been operating, the ALBATROSS has been expert at cheating Davey Jones. Employed by the Air Force for air rescue and by the Navy as a utility amphibian, this versatile aircraft displays traditional Grumman ruggedness and dependability.

GRUMMAN AIRCRAFT ENGINEERING CORPORATION, BETHPAGE
Contractors to the Armed Forces





First in SAFETY


How to decelerate the landing run of jet planes on small fields was the problem. Parachutes seemed to be the obvious brake, but the rushing air tore the chutes apart. Then, the Switlik Parachute Company produced a drogue parachute using ribbons of nylon rather than a solid cone. The ribbons permitted some of the rushing air to escape but at the same time supplied sufficient resistance to brake the jet bomber. The chute is stowed at the base of the vertical fin and is released by the pilot from a cockpit control. Switlik parachute brakes help make it possible for the jet bombers to operate safely from small fields when giving support to ground troops in combat. One of the Switlik *firsts* from their research for greater safety.

SWITLIK

PARACHUTE COMPANY, INC.

LALOR AND HANCOCK STREETS, TRENTON, NEW JERSEY, U. S. A.

B.F. Goodrich

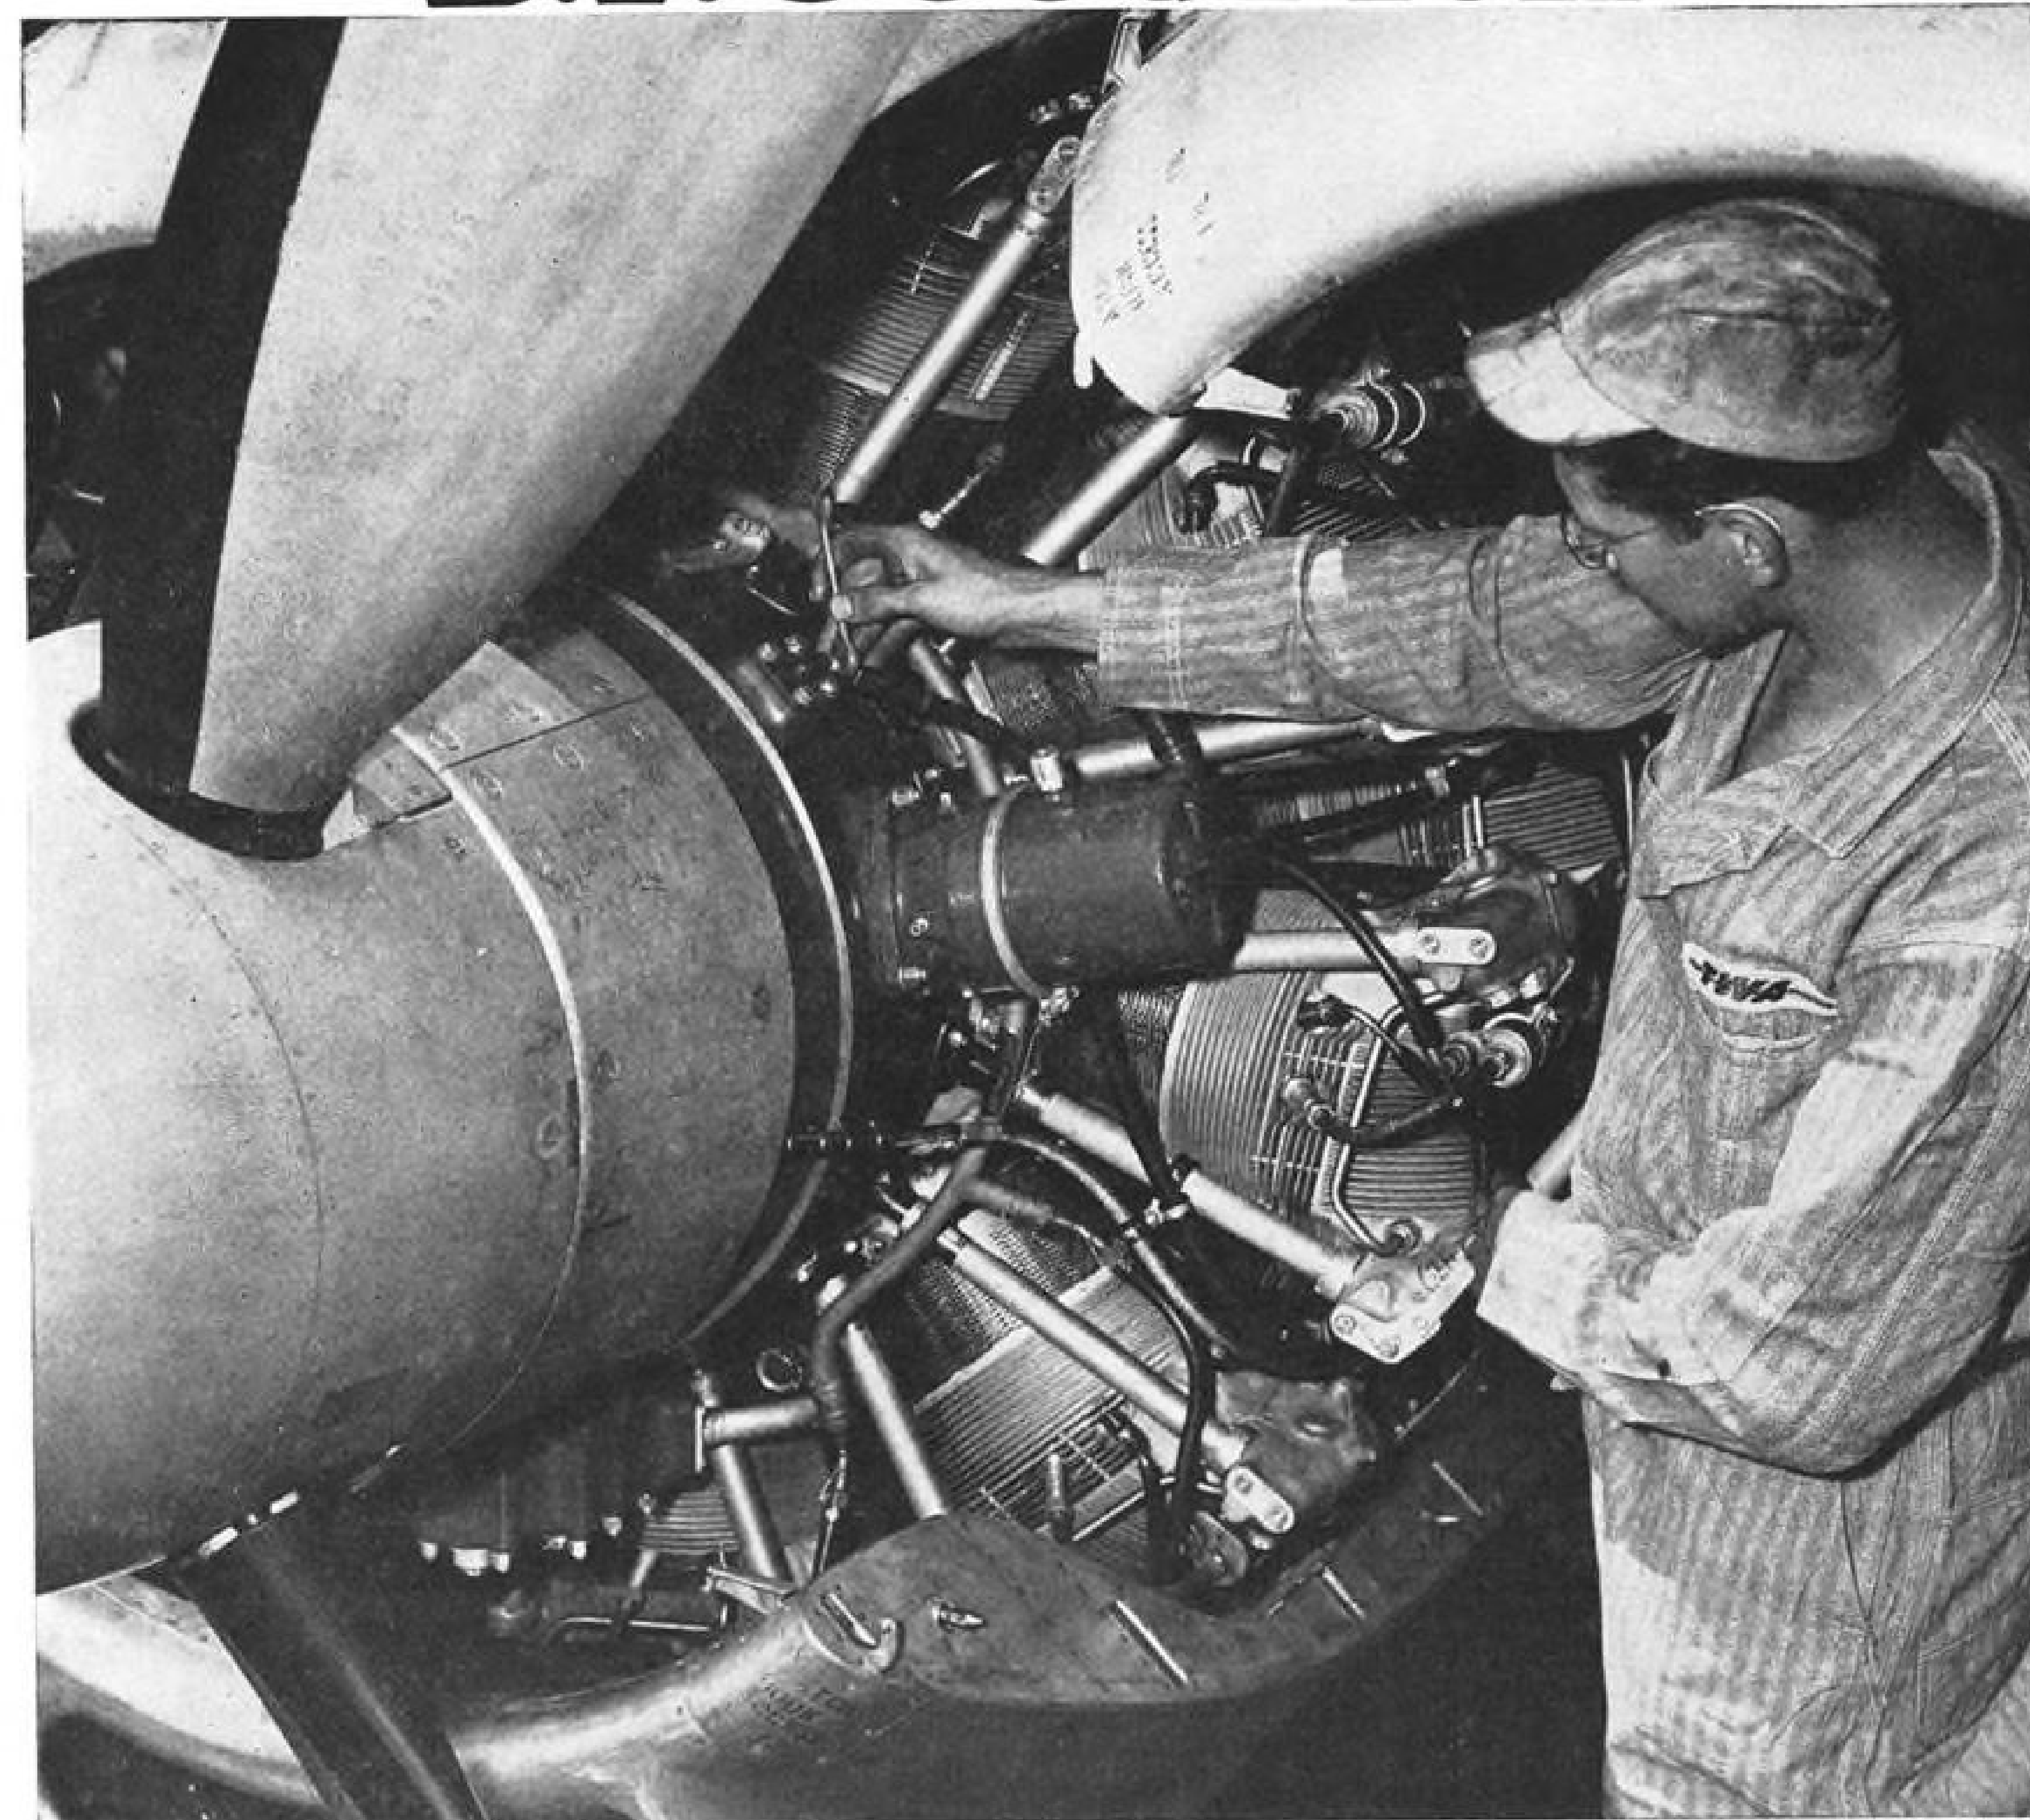

Rubber that makes gasoline stretch

TO HELP flight engineers adjust an airplane's fuel supply for maximum efficiency, a hydraulic oil line transmits propeller load to a dial on the instrument panel. This dial tells them when to make the mixture richer or leaner. But during extremely cold weather, the oil in the lines used to congeal, giving false readings on the dial. As a result the fuel mixture was often far richer than it needed to be, and gasoline was wasted.

Looking for a flexible material which would keep oil warm, Trans World Airlines brought the problem to B. F. Goodrich.

B. F. Goodrich engineers already had a headstart toward the answer. They had developed electrically-heated rubber—rubber with a core of resistance wires. These "electric blankets" had been successfully employed on air scoops, control surfaces, propellers, and other places where spot heat is needed.

So BFG engineers sheathed a hydraulic line in electric rubber, put it into service test on a TWA Constellation. After 1297 hours of operation, TWA reported complete success. No thickening of the oil—even at minus 25° Centigrade. No false readings on the instrument. And no signs of deteri-


oration of the heating element. As a result, new TWA Constellations are being delivered with the BFG heated hydraulic line installed, and planes now in service are being converted.

Electric rubber is typical of the many products of B. F. Goodrich research which solve tough problems in aviation. For help with your problem, write *The B. F. Goodrich Company, Aeronautical Division, Akron, Ohio.*

B.F. Goodrich
FIRST IN RUBBER

Auburn JET IGNITOR Spark Plugs

chosen for
dependable
service in

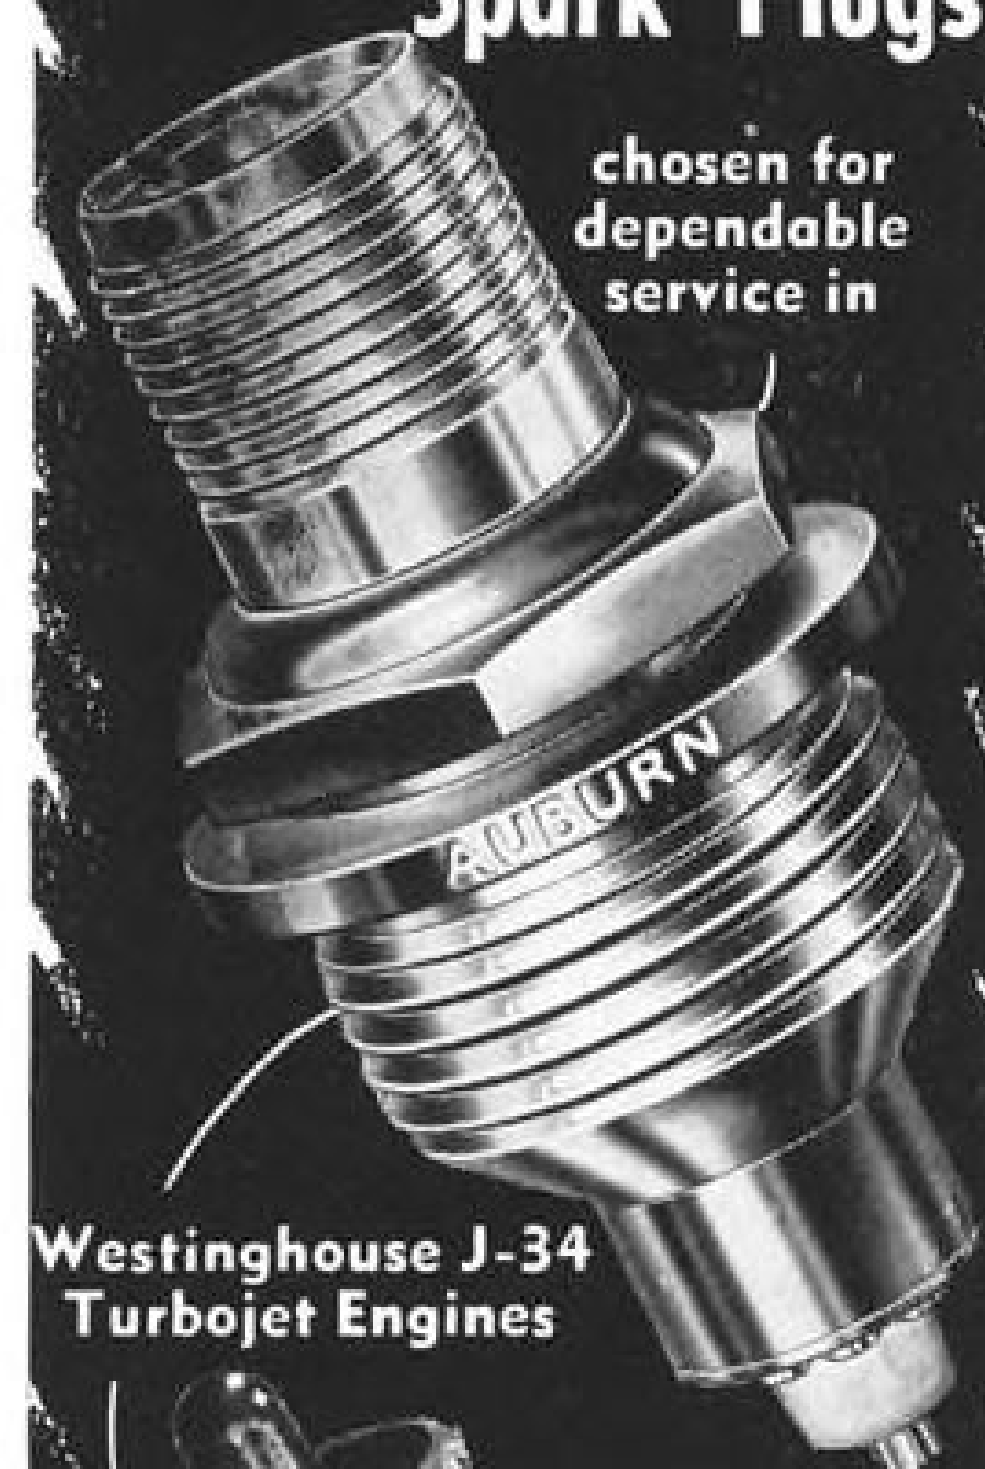

Westinghouse J-34
Turbojet Engines



one of which
powers
Lockheeds
XF90
Penetration
Fighter

**AUBURN SPARK PLUG
Co. Inc., Auburn, N.Y.**

AIRCRAFT DIVISION
1180 Raymond Blvd. Newark 2, N. J.
EXPORT OFFICE
120 W. 42nd St. New York 18, N. Y.
IN CANADA
Railway & Power Engineering Corp. Ltd.

Aviation Week



Member



Volume 53

December 4, 1950

Number 23

Headline News

Foreign Aid Jet Plane Deliveries... 12
Mail Means Money, PO Says... 13
Excess Profits... 14

Financial

CAB Asks Interchange Agreement... 43

Production

NAA Expands Production Plans... 17

Air Transport

No Additional Coach Operators Needed 44
Pilot Pay... 45
Tigers' Freight Doubled... 49

Aeronautical Engineering

New High-thrust Turbojet Seen for GE. 21
Air Bearing Gyro for Missile Guidance. 28
Australia's First Homegrown Jet... 31

Avionics

Ground Tester for OMNI Equipment. 33
CAL: Progressive Midwest Carrier... 37
BOAC Shows "Comet" Radio Gear... 38

Editorials

Rail and Air Casualty Rates... 58
Missile Coordination... 58
Why Raise Coach Fares... 58

Departments

News Digest... 7 Washington Roundup... 16
Aviation Calendar... 8 USAF Invitations... 18
Picture Page... 9 Production Briefing... 18
Who's Where... 11 New Products... 40
Industry Observer... 11 Also on the Market... 40
Shortlines... 50

Robert H. Wood
EDITOR

Merlin H. Mickel...MANAGING EDITOR

William Kroger...Assistant Managing Editor
Alexander McSurely...Assistant Managing Editor
Irving Stone...Technical Editor
Ben Lee...Military Editor
G. L. Christian, III...Equipment & Maintenance
David A. Anderton...Engineering
F. Lee Moore...Transport
Katherine Johnsen...Congress
Henry Lefer...News Desk
Scott H. Reiniger...Editorial Assistant
Victoria Giaculli...Editorial Assistant
Erwin J. Bulban...Special Assignments
Thomas M. Self...Los Angeles Correspondent
Edward E. Thorp...Editorial Makeup

Editorial Offices: 330 West 42nd St., New York 18, N. Y., Phone Longacre 4-3035.
National Press Bldg.; Washington 4, D. C., Phone National 3414.

Domestic News Bureaus: Atlanta 3, Rhodes-Haverty Bldg.; Chicago 11, 520 N. Michigan Ave.; Cleveland 15, Hanna Bldg.; Detroit 26, Penobscot Bldg.; Los Angeles 17, 1111 Wilshire Blvd.; San Francisco 4, 68 Post St.; Houston, 514 South St. Correspondents in more than 60 major cities.

Foreign News Bureaus: London, Paris, Frankfurt, Tokyo, Bombay, Melbourne, Rio de Janeiro, Mexico City. Correspondents in more than 50 major cities.

Robert F. Boger
PUBLISHER

J. G. Johnson, Business Manager; R. W. Martin, Jr., Sales Manager; Anita Scaffo, Research and Marketing; Sales Representatives: J. C. Anthony, New York; M. J. Storz, Philadelphia; V. K. Disette, Cleveland; L. J. Biel, Chicago; W. E. Donnell, St. Louis; J. H. Allen, Dallas; R. C. Maulsby, Atlanta; J. W. Otterson, San Francisco; C. F. McReynolds, Los Angeles. Other sales offices in Pittsburgh, Detroit, Boston, London.

December 4, 1950

AVIATION WEEK
Member ABC and ABP

Vol. 53—No. 23

Published weekly by McGraw-Hill Publishing Company, Inc., James H. McGraw (1860-1948), Founder. Publication Office: 99-129 North Broadway, Albany 1, N. Y.

Executive, Editorial and Advertising Offices: McGraw-Hill Building, 330 W. 42nd St., New York 18, N. Y. Curtis W. McGraw, President; Willard Chevalier, Executive Vice-President; Joseph A. Gerardi, Vice-President and Treasurer; John J. Cooke, Secretary; Paul Montgomery, Senior Vice-President, Publications Division; Ralph B. Smith, Editorial Director; Nelson Bond, Vice-President and Director of Advertising; J. E. Blackburn, Jr., Vice-President and Director of Circulation.

Subscriptions: Address correspondence to AVIATION WEEK—Subscription Service, 99-129 N. Broadway, Albany 1, N. Y., or 330 W. 42nd St., New York 18, N. Y. Allow ten days for change of address.

Please indicate position and company connection on all subscription orders.
Single copies 50¢. Subscription rates—United States and possessions, \$6 a year; \$9 for two years; \$12 for three years. Canada, \$8 a year; \$12 for two years; \$16 for three years, payable in Canadian currency at par. Pan American countries, \$10 a year; \$15 for two years; \$20 for three years. All other countries, \$20 a year; \$30 for two years; \$40 for three years. Entered as second-class matter, July 16, 1947, at the Post Office at Albany, N. Y., under Act of Mar. 3, 1879. Printed in U. S. A. Copyright 1950 by McGraw-Hill Publishing Co., Inc.—All Rights Reserved. Cable address "McGraw-Hill New York." Publications combined with AVIATION WEEK are AVIATION, AVIATION NEWS, AIR TRANSPORT, AERONAUTICAL ENGINEERING and AIRCRAFT JOURNAL. All rights to these names are reserved by McGraw-Hill Publishing Co.


REPUBLIC AVIATION

17 YEARS


FAFNIR

Republic, maker of mighty Thunderbolts and Thunderjets, excels in producing ships that fly with a minimum of time off for service or overhaul. Its Thunderjet is believed to require less maintenance than any other jet now in service. For such performance, an uncompromising standard from blueprint to test flight is essential. Fafnir Aircraft Bearings have flown on Republic Ships for 17 years. Something more than good ball bearings is needed to maintain this long association. It's a Fafnir attitude and aptitude . . . a way of looking at ball bearings from the designer's side, an aptitude gained from more than twenty years' specialization in aircraft ball bearings. The Fafnir Bearing Company, New Britain, Connecticut.

Fafnir Double Row, Self-Aligning Ball Bearing (DSP Series), regularly specified by Republic. Light, compact design . . . Seal. Bearings prepacked with lubricant to Air Force and Navy through double row of balls operating on a spherical surface beyond face obviates need of spacers.

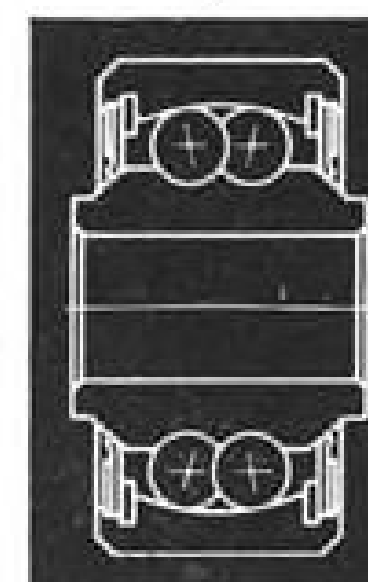

one of the Fafnir Ball Bearing units incorporating the efficient Fafnir Plya-Specifications. Self-Alignment achieved in the outer ring. Inner race extension

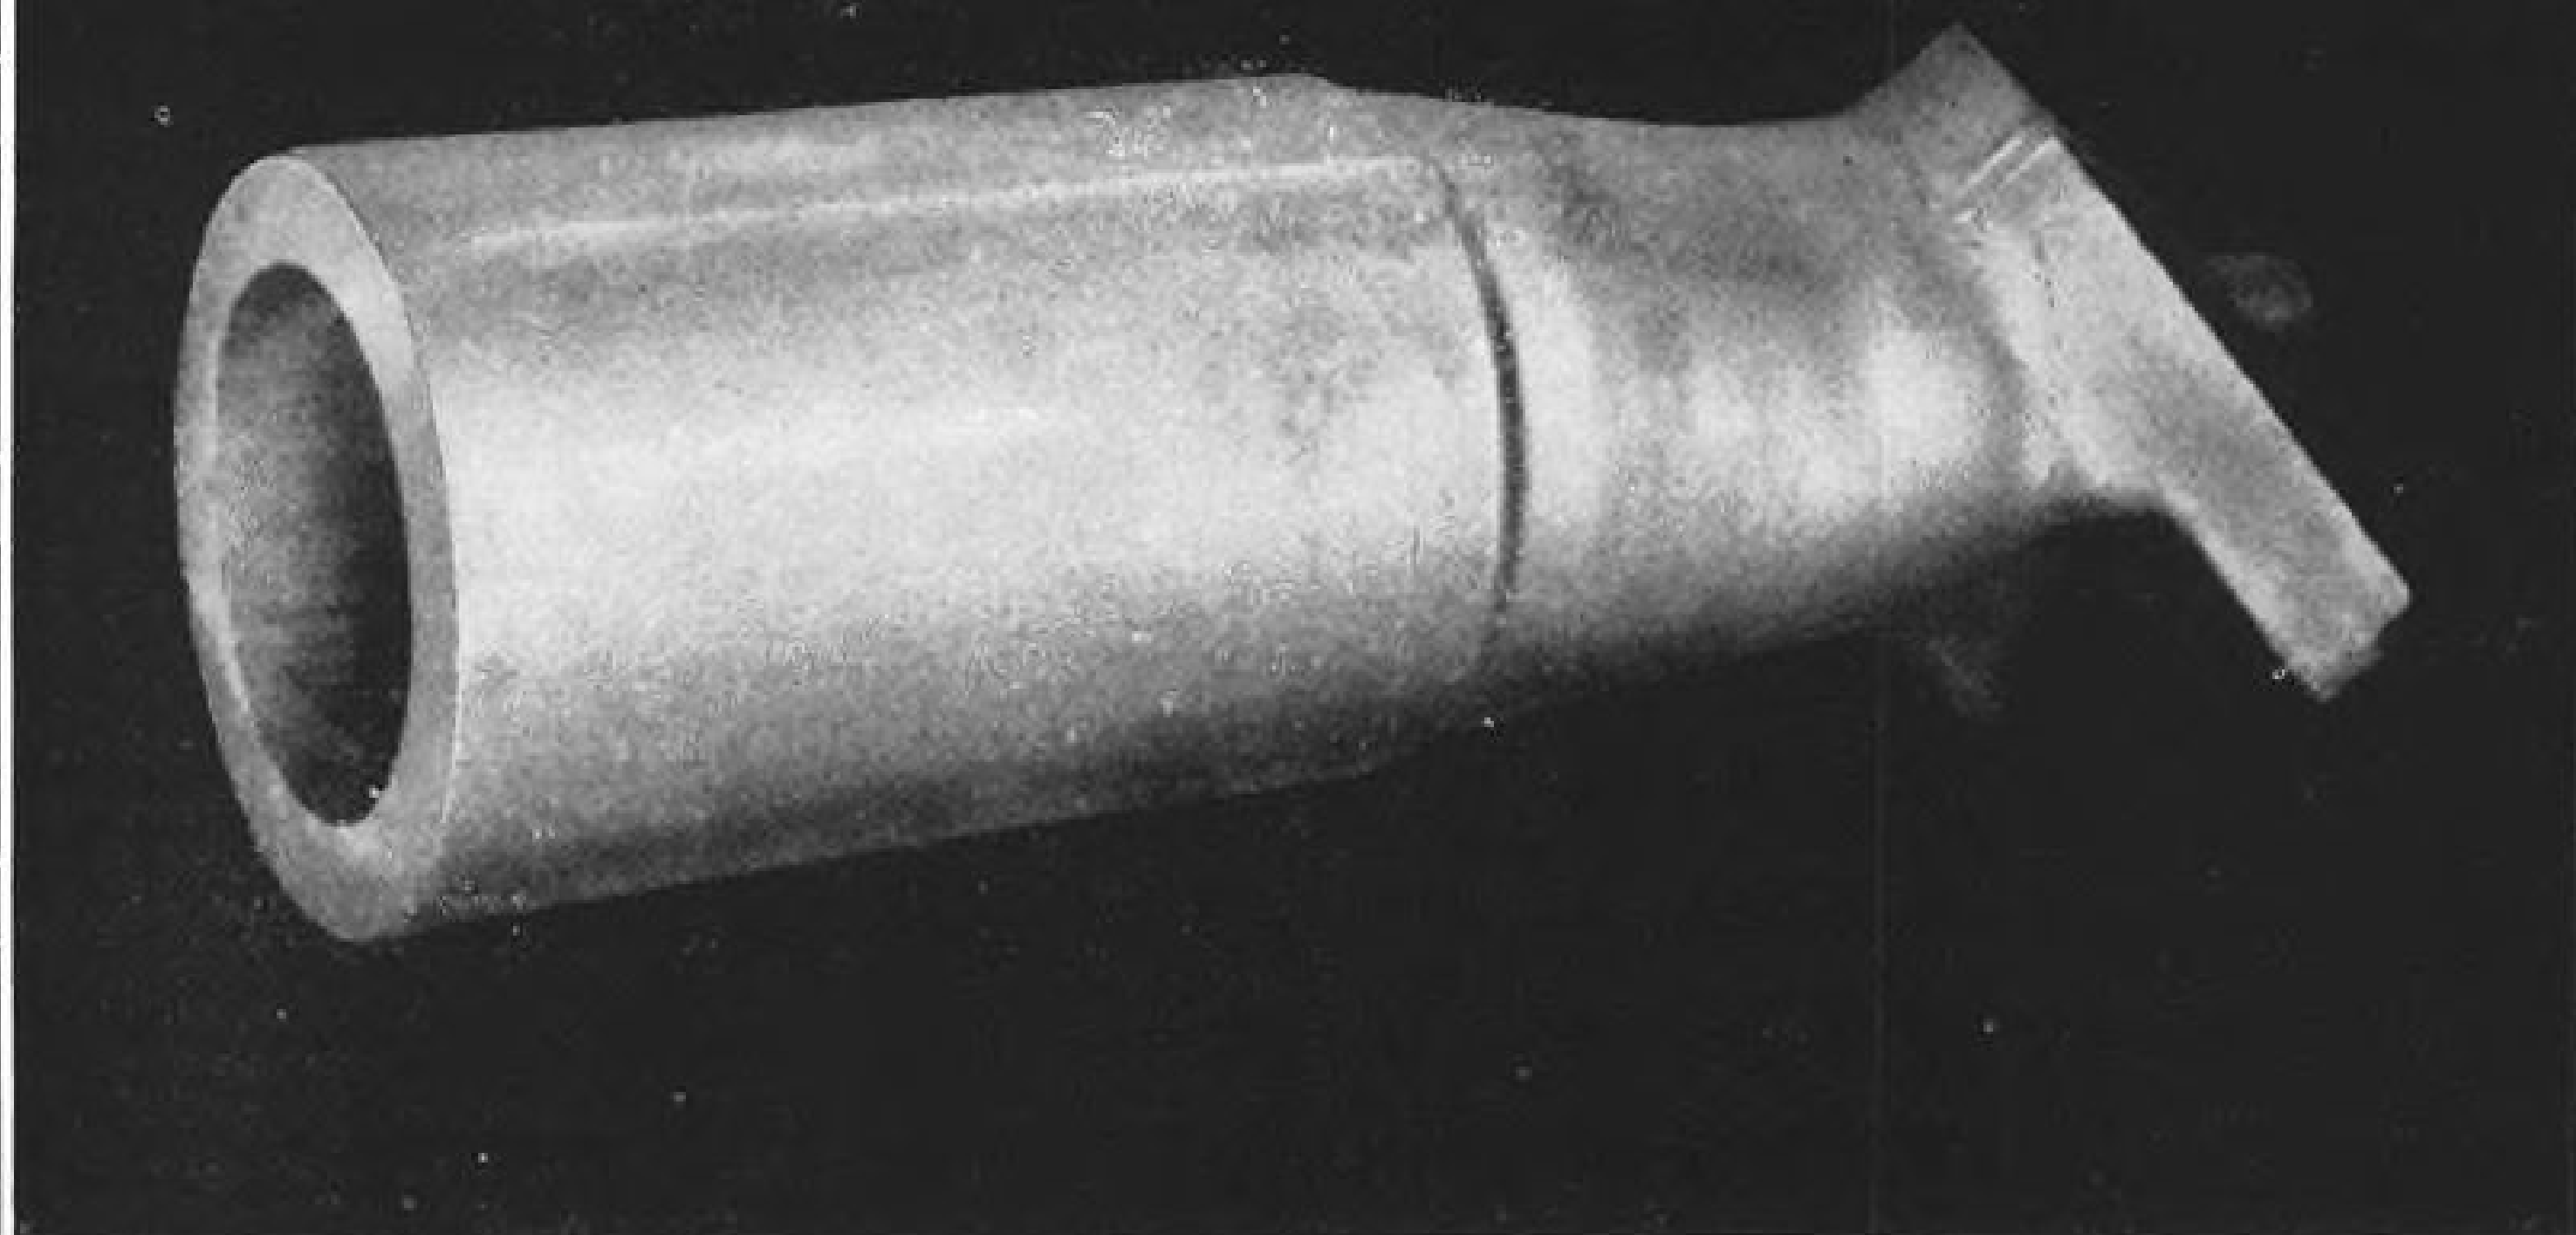

AIRCRAFT LANDING GEAR COMPONENT

An outstanding example of forging technique—the piercing operation in the case of this 276-lb. alloy steel forging results in a weight saving of approximately 30 per cent in addition to an improved metallurgical structure.

For the greatest combination of physical properties (tensile and compressive strength, ductility, impact and fatigue strength) with minimum weight and uniform quality no other method of forming metal compares with the forging process.

In large and medium-size forgings of steel and light alloy—there is no substitute for Wyman-Gordon experience.

Standard of the Industry for More Than Sixty Years

WYMAN-GORDON

Forgings of Aluminum, Magnesium, Steel

WORCESTER, MASSACHUSETTS, U. S. A.

HARVEY, ILLINOIS

DETROIT, MICHIGAN

NEWS DIGEST

DOMESTIC

CAA, CAB and NPA have agreed on action to insure U.S. airlines new planes and parts to maintain operations. Critical emergency items needed by airlines will be screened by CAA and then submitted to NPA for issuance of directives as necessary to suppliers approving production and delivery of necessary equipment. CAA-CAB will negotiate directly with the military in programming plane and part production, including electronic gear. International airlines will be handled by CAA-CAB, ECA and Commerce and State Departments.

Personal and executive plane exports of 5000 lb. and less for October by nine companies totaled 86 valued at \$288,509, compared with 37 planes worth \$240,438 reported by nine companies for the previous month. Turkey was by far the largest buyer, taking 50 planes at \$120,000, Greece was next, taking 18 worth \$43,200.

Three Grumman SA-16 amphibians recently made a 2400-mi. flight from California to Hickam AFB, Hawaii. No special gear was carried for the flight, but the planes were fitted with new-type wing float fuel cells plus droppable auxiliary wing tanks.

Navy has awarded a contract for installation of a 132,000-volt underground electrical system at Naval Aero-Turbine Laboratory, Trenton, N. J., to Plymouth Electrical Construction Co., Inc., Washington, D. C. The firm's bid was \$228,000. The lab, which will cost \$22 million when completed, will test gas turbines at simulated altitudes up to 65,000 ft.

Last F-86A Sabre was delivered on schedule to USAF by North American Aviation. The company is already in production at Los Angeles on the F-86D all-weather fighter, and the F-86E, which features control improvements, including controllable horizontal tail surfaces.

Critical shortage of aeronautical engineers is highlighted by Republic Aviation Corp., offering to take on men with architectural, electrical, civil and mechanical engineering specializations and give them on-the-job training to adapt their skills to aviation work. The firm's immediate requirements call for nearly 200 engineers and about 1500 other employees. The company sees its employment figure going up from the present 6500 to over 9500 by 1952.

Three Lockheed F-94 all-weather fighters successfully completed a severe accelerated test program at Edwards AFB, Muroc, which entailed crumpling six months of flying into a month. The three planes flew continuously using shifts of pilots and ground crews. Highly significant was the fact that the F-94S completed their program without change of a single engine or after-burner.

American Society of Travel Agents asks CAB that only regular certificated airlines and authorized agents be permitted to arrange overseas air excursions from U.S. ASTA claims this would end such occurrences as the stranding of student travelers this summer.

FINANCIAL

Ryan Aeronautical Co. has declared a ten cents per share cash dividend, payable Dec. 27, to stockholders of record Dec. 12. Ryan directors announced the board's intention to make quarterly dividend payments.

Stewart-Warner Corp. has voted a quarterly cash dividend of 35 cents per share, payable Jan. 6, and a year-end cash dividend of 50 cents, payable Dec. 27, to stockholders of record as of Dec. 8. The firm paid 25-cent dividends on Jan. 7, April 8, July 8, and Oct. 7.

INTERNATIONAL

British exports for October totaled slightly over \$7 million and included 55 complete planes, 132 engines, 1746 tires, and nearly \$3.5 million worth of accessories. Imports included five complete planes valued at \$150,560 and slightly over \$2.5-million worth of accessories.

IATA Clearing House turnover for August reflected continued increases in summer international airline traffic, with figure of \$13,495,000 compared with \$12,649,000 for the same month in 1949. The Clearing House was able to retire 82 percent of all August transactions without necessity of cash payment or foreign exchange purchase. This was done by offsetting credit and debit accounts of its 35 members.

De Havilland Comet will be tested with axial-flow engines replacing its present centrifugal DH Ghost engines. De Havilland's aim is to get more power in the Comet and present an "alternative model for the very long world stages."

The New

Trim-Trol®

ELECTRIC ROTARY ACTUATOR



SIDE MOUNTING MODEL



★ Two Mounting Styles. Side mounting model for general purpose and "Leading Edge" mounting model for Trim-Tab applications. See above.

★ Compact Size. See dimensions above.

★ Weight 2.25 pounds.

★ Operating Load Capacity 350 in. lbs. (Std. Ratio)

★ Static Capacity 1500 in. lbs. minimum.

★ Zero Backlash Output Shaft.

★ Positive Overtravel Safety Stops.

★ Radio Noise Filter Built In.

★ Compliance with all applicable specifications.

★ POSITIONING CONTROL — or electrical synchronizing available using our "Servosyn" unit.




★ Position Transmitter Potentiometer Built In and Externally Adjustable.


WRITE FOR BULLETIN 111

AIRBORNE

ACCESSORIES CORPORATION
25 MONTGOMERY ST. • HILLSIDE 5, NEW JERSEY
HOLLYWOOD, CAL. • DALLAS, TEX. • OTTAWA, CAN.

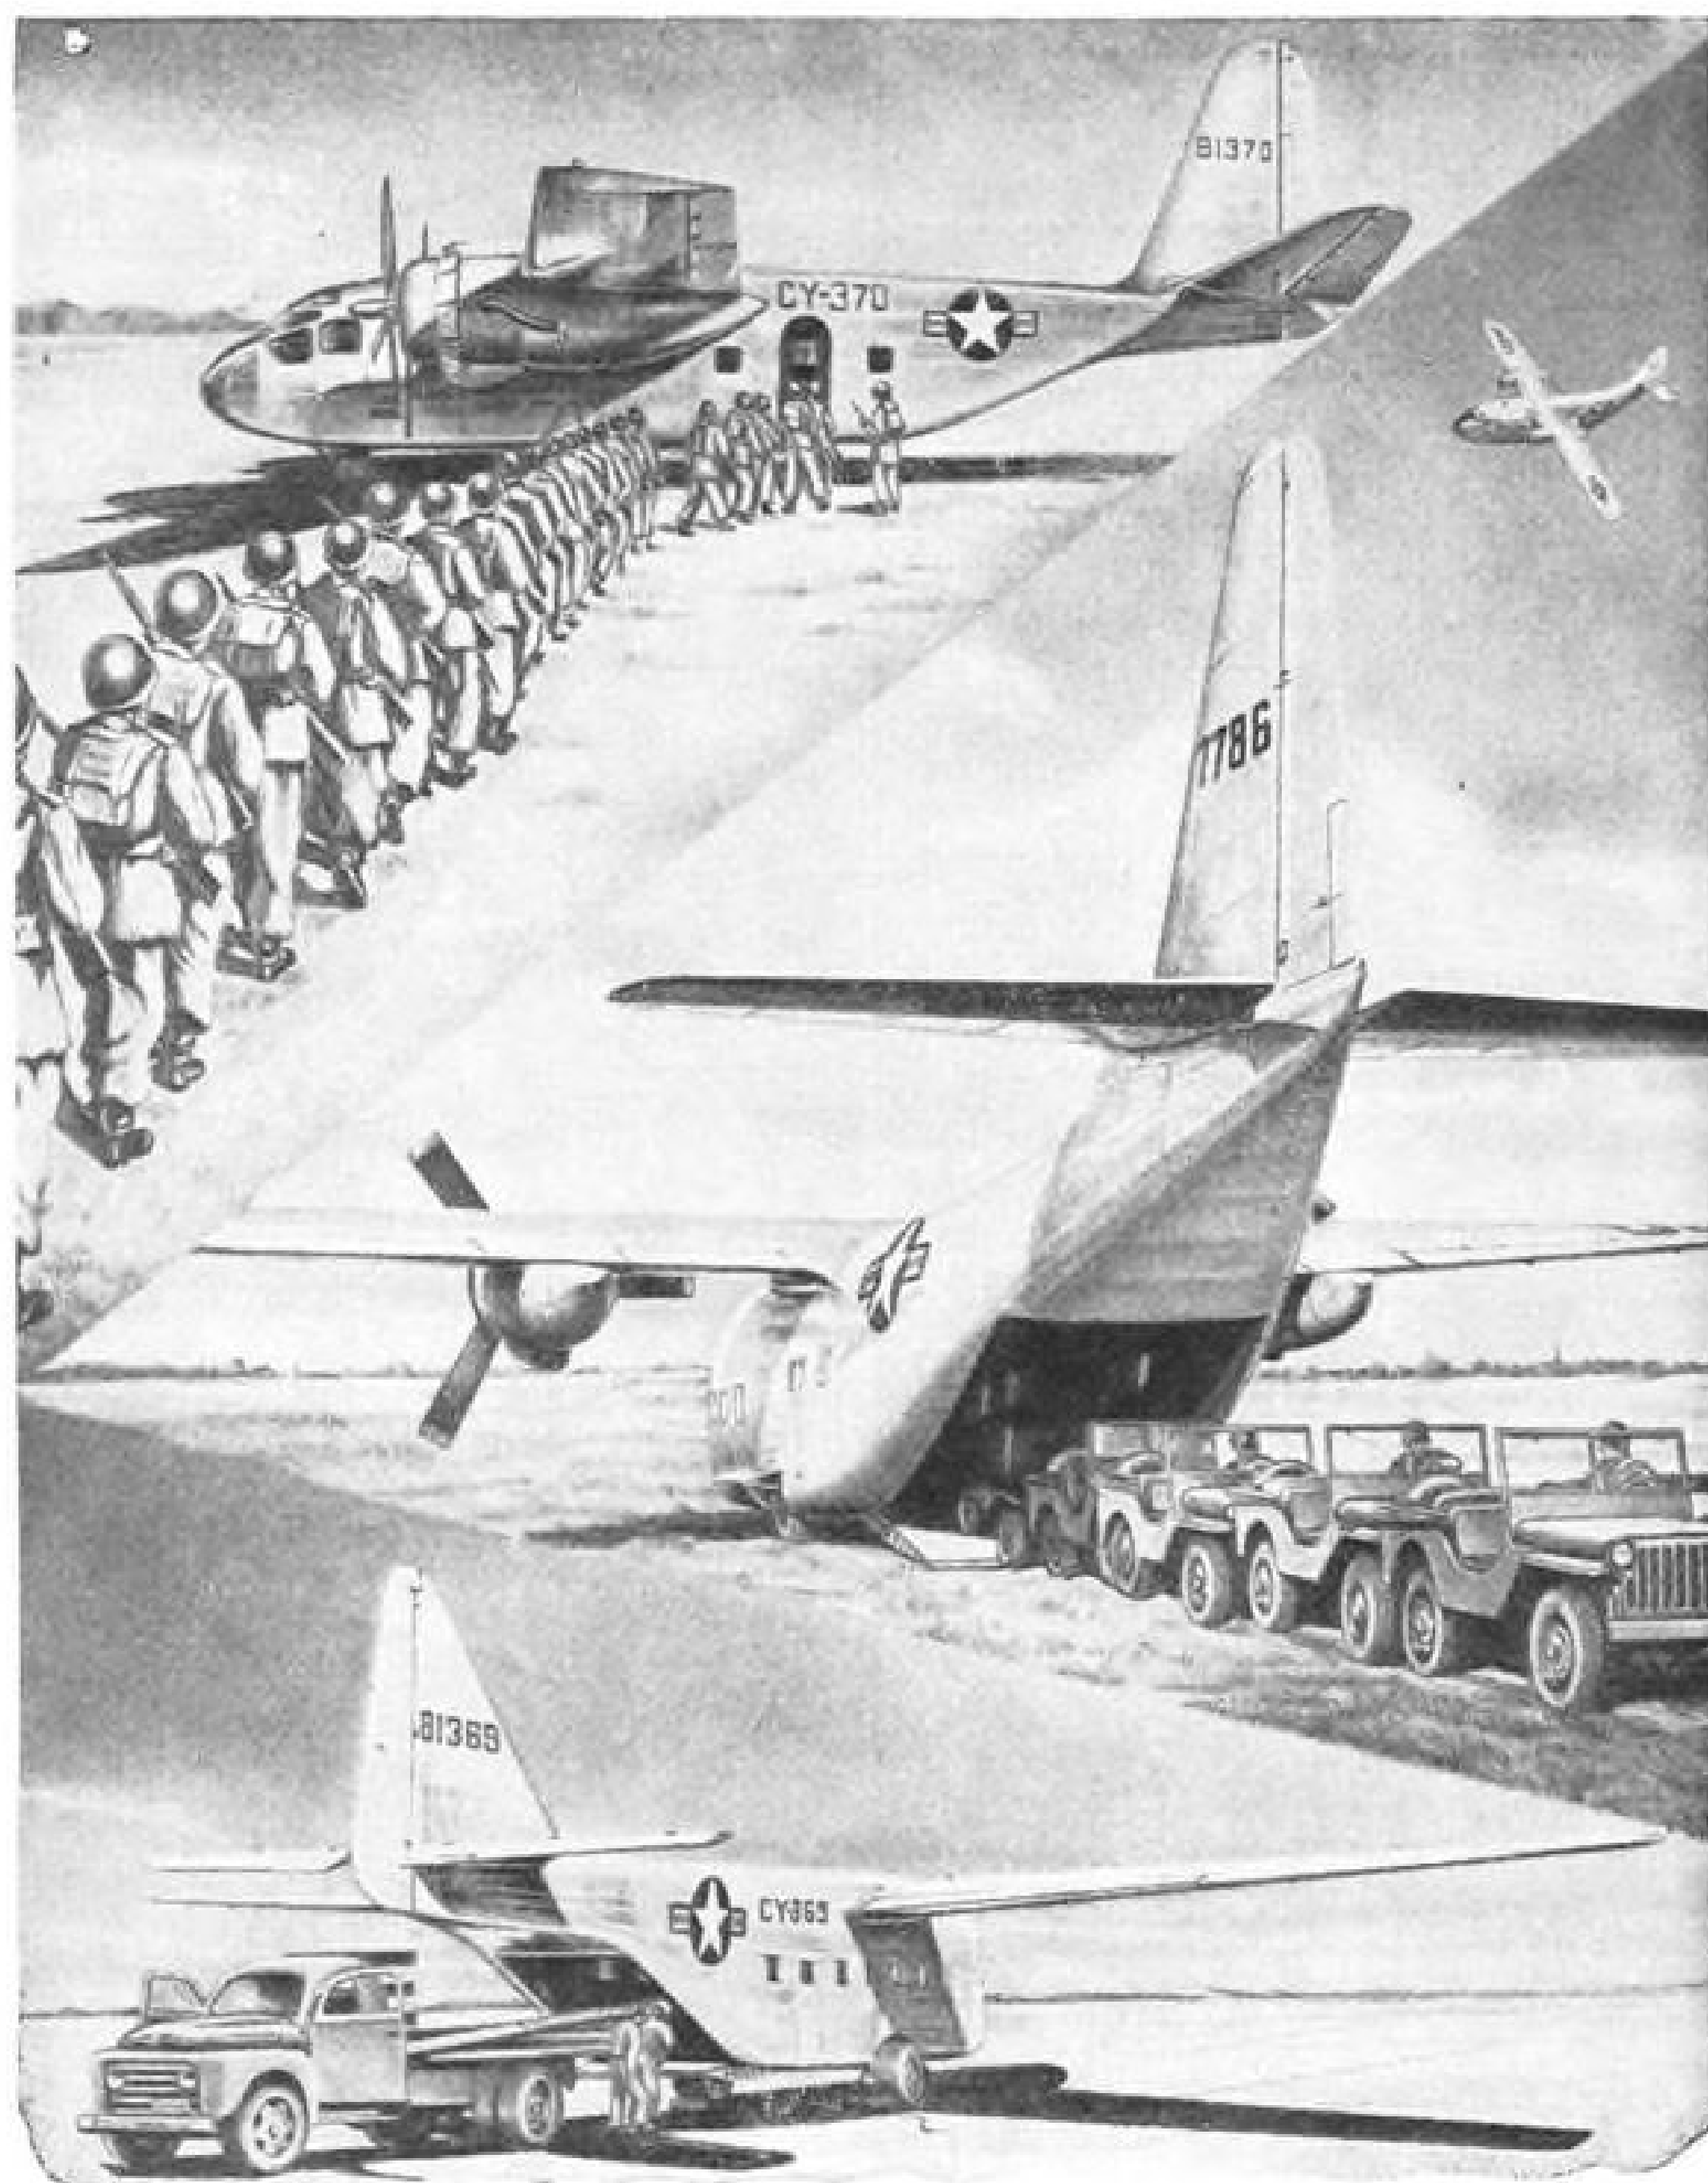

Adaptable

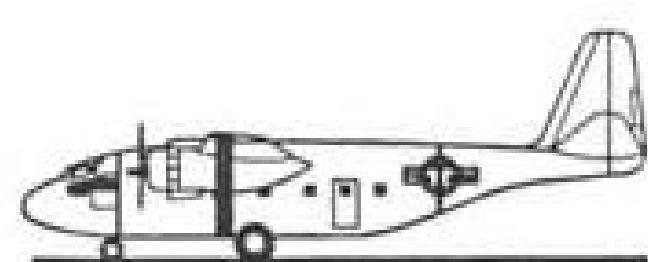

AVITRUC—designed for adaptability to any transport need. Center of gravity limits permit a flexible distribution of cargo, simplifying loading. Safe delivery is assured—whether of troops or vehicles, weapons or supplies.

Cessna AIRCRAFT CO., Inc.
WEST TRENTON, NEW JERSEY



AVIATION CALENDAR

- Nov. 29-Dec. 13—Second annual nuclear science seminar, Oak Ridge, Tenn. For admission apply to Lt. Comdr. D. J. Mallon, USNR, Oak Ridge.
- Dec. 7-9—Meeting of California Assn. of Airport Executives, Hotel Oaks, Chico, Calif.
- Dec. 8—Aviation Associates show and dance, Town Hall, Philadelphia.
- Dec. 16—14th Wright Brothers Lecture, Institute of Aeronautical Sciences, U. S. Chamber of Commerce Auditorium, Washington, D. C.
- Dec. 16—Annual Wright Day dinner of the Aero Club of Washington, Presidential Room, Statler Hotel, Washington, D. C.
- Jan. 2-7, 1951—Miami Aviation Week, Miami, Fla.
- Jan. 5-6—Third annual Kansas aerial spray conference, engineering lecture hall, Kansas State College, Manhattan, Kan.
- Jan. 6-7—Florida Air Pilots Assn. air show and exposition of planes and equipment, Opa Locka Airport, Miami, Fla.
- Jan. 8-10—Eighth annual air cruise Miami-Havana, and return, of Florida Air Pilots Assn.
- Jan. 15-18—Plant maintenance show and concurrent conference on plant maintenance techniques, Cleveland, Ohio.
- Jan. 21—Air education day, sponsored by the Palm Springs Junior Chamber of Commerce, Palm Springs Airport, Calif.
- Jan. 22-26—Winter general meeting, American Institute of Electrical Engineers, Hotel Statler, New York.
- Jan. 29-Feb. 1—19th annual meeting of the Institute of Aeronautical Sciences, Hotel Astor, N. Y.
- Feb. 19-20—Meeting covering agricultural research as related to aviation, sponsored by the Flying Farmers of America, Memphis.
- Mar. 16—Sixth annual flight propulsion meeting, Institute of Aeronautical Sciences, Hotel Carter, Cleveland.
- Mar. 19-23—Seventh Western Metal Exposition, Oakland Auditorium and Exposition Hall, Oakland, Calif.
- Apr. 24-26—ATA annual engineering and maintenance conference, Hotel Drake, Chicago.
- May 17-19—Annual convention of the Women's Aeronautical Assn. of the U. S., Little Rock, Ark.
- June 11-15—Second annual conference on industrial research, conducted by Columbia University Dept. of Industrial Engineering, New York.
- June 15-July 1—International aviation display, Grand Palais and Le Bourget Airport, Paris.
- June 25-29—1951 summer general meeting of the American Institute of Electrical Engineers, Royal York Hotel, Toronto.

PICTURE CREDITS

9—(top) McGraw-Hill World News; (center) Cessna Aircraft Co.; (bottom left) Glenn L. Martin Co.; (bottom right) Howard Levy; 12—(top) Dept. of Defense; (lower) Republic Aircraft; 13—United Air Lines; 14—Piper Aircraft; 15—Wide World; 21-22 General Electric Corp.; 28 North American Aviation; 31-33 McGraw-Hill World News.



TRANSPORTING SAPPHIRES—Neatly fitted 7200-lb.-thrust Armstrong Siddeley Sapphire turbojets replace outboard Bristol piston engines on this four-engine Handley Page Hastings transport. On half the jet's power, plane reached 1000 ft. in 30 sec.


Aviation News Picture Highlights



ARMY TAKES DOUBLE PORTION—U. S. Army has doubled its previous big order (up to 500 planes) for Cessna's trim little L-19 reconnaissance plane powered by the new 213-hp. Continental. Wichita company delivered first production plane ahead of schedule.

GAME BIRD—Martin's KDM-1 radio-controlled target missile Plover under wing of Navy JD-1.

FRENCH COPTER—Sud-Est SE 3110 two seater has 203-hp. Salmson, butterfly tail rotors.

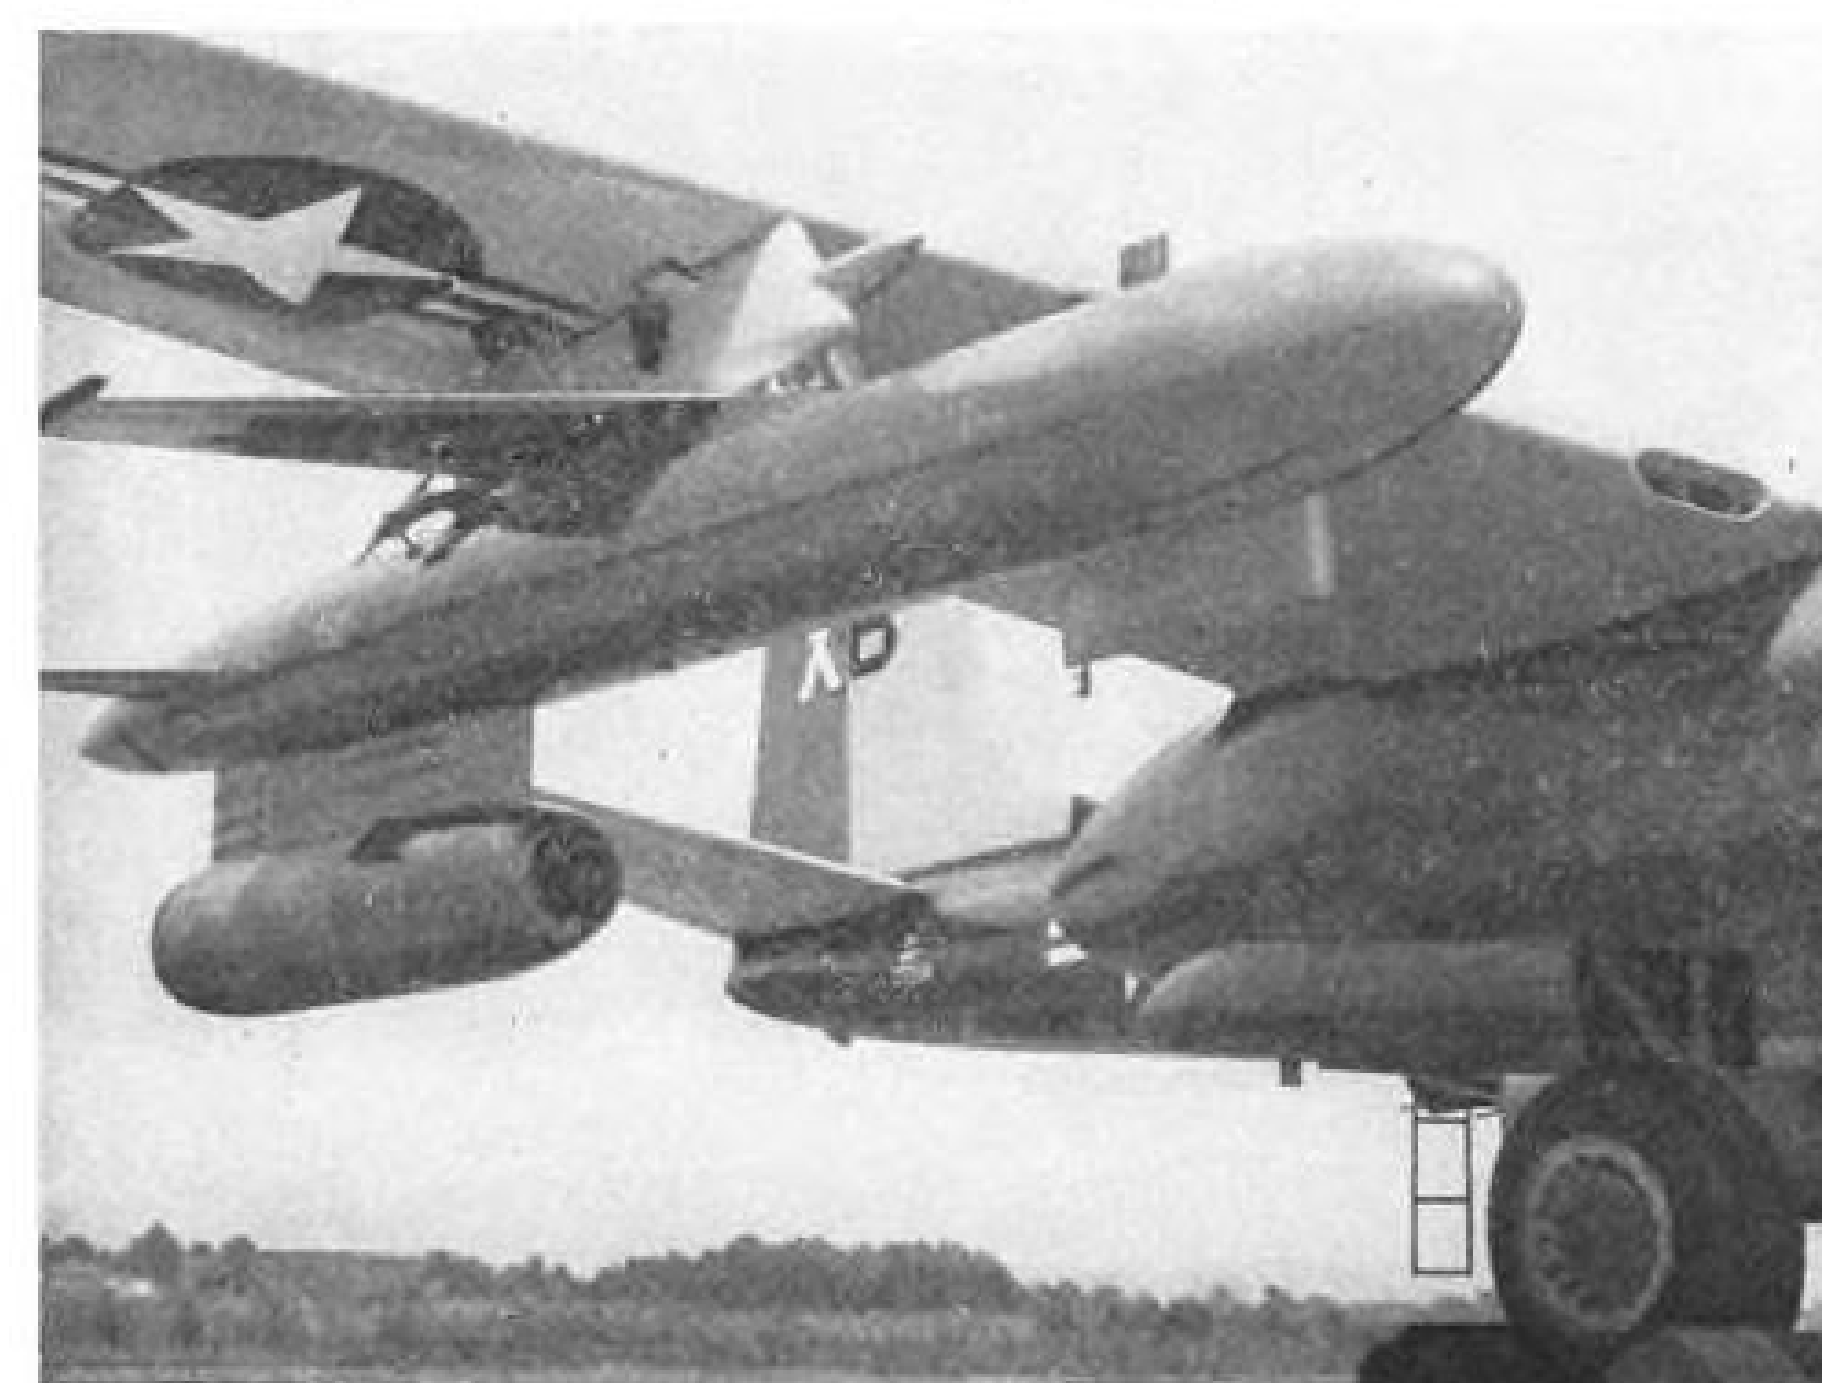



RAIN—by any other name, would still be a pain in the windshield if a certain distinguished Canadian doctor hadn't recently come up with a remarkable new compound, called FC-10, that will be on the market any day now.

FC-10, an invisible rain-repellent wax, can be applied to a plane's windshield in about fifteen minutes, and one application will last from a week to two months, depending on the care and preparation of the windshield.

There's a compound for glass, another for plexiglass. Either sheds rain like water off the proverbial duck's

back, assuring high visibility at speeds ranging from 600 down to 50 miles per.

No matter how you slice it, this is a real boon, especially to planes without windshield wipers.

BUT NOW—A PLAY!

(The scene is that junk heap out behind Hangar 5. A worn-out valve and a beat-up piston ring are discussing their misspent lives)


VALVE: Look at it this way, Ferdie! If I had my life to live over again, I'd never touch a drop of anything but Gulfpride Aviation Oil—Series D!

RING: Same here! It was just rotten luck I learned too late that Gulfpride Aviation Oil—Series D—is the finest detergent dispersant oil for horizontally opposed engines there is!

VALVE: Pilots are like that! They never forget how to do an outside loop, but how many of 'em remember about the only aviation oil put through Gulf's exclusive Alchlor process to remove carbon and sludge formers?



RING: You can say that again! And besides, Gulfpride Aviation Oil—Series D—increases those periods between overhauls up to 100%! Ah, well, better luck next incarnation—what?

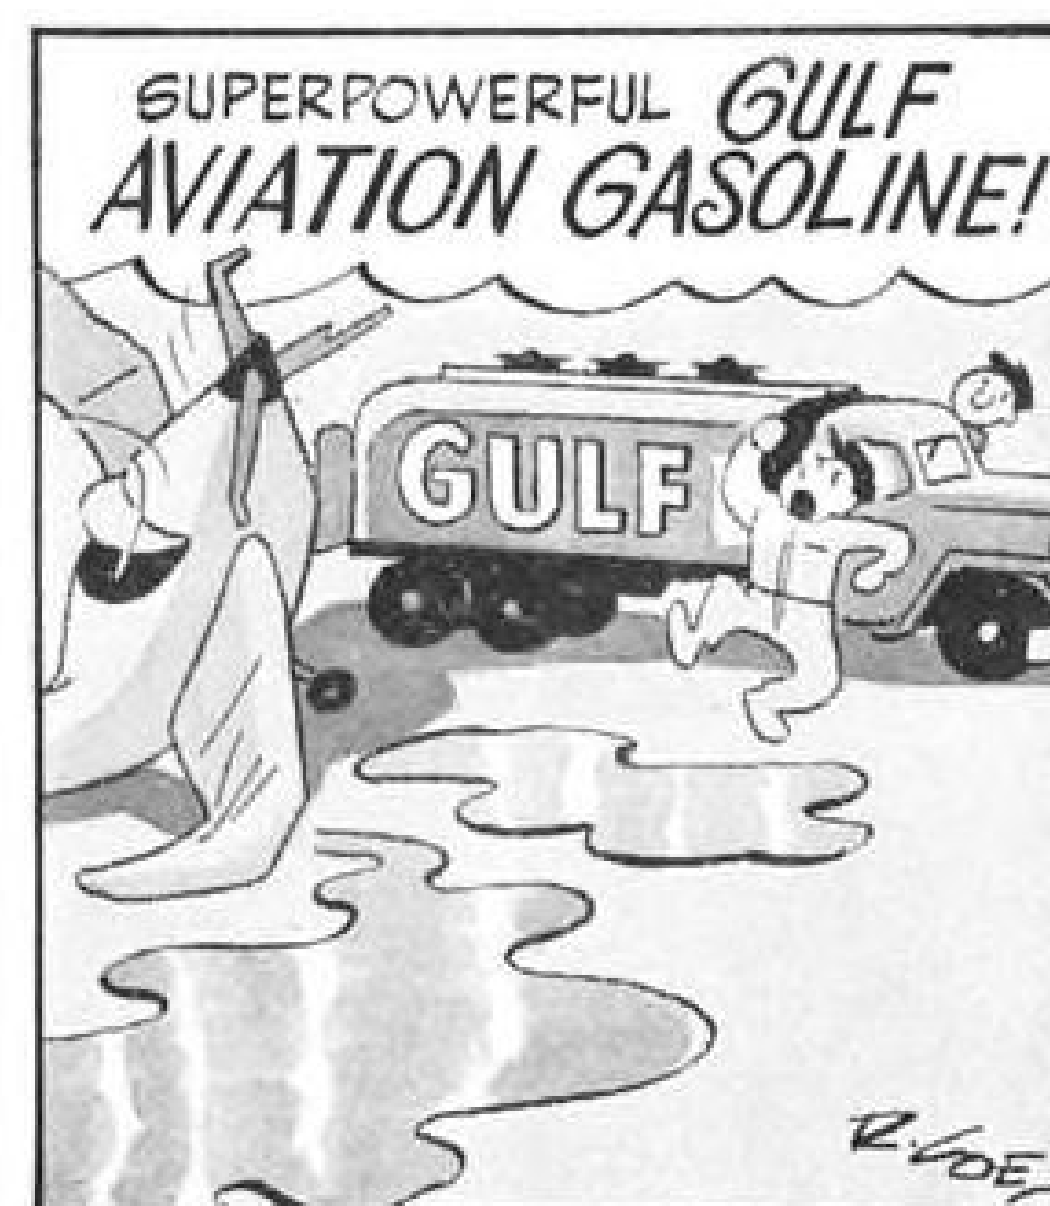

Gulf Oil Corporation . . . Gulf Refining Company

WHO'S WHERE

In the Front Office

Arthur E. Raabe, a Bendix Aviation Corp. vice president, has been made general manager of the Eclipse-Pioneer division. The appointment eases the load on Raymond P. Lansing, Bendix vice president and group executive in charge of Eclipse-Pioneer, Scintilla-Magneto division at Sidney, N. Y., the Red Bank division, and Friez Instrument division, Baltimore. He has been, in addition, general manager of Eclipse-Pioneer. Raabe has been a Bendix executive since 1929.

Changes

R. G. (Reggie) Clarke has been named general superintendent and plant manager of the Columbus, Ohio, plant North American Aviation recently acquired from Curtiss-Wright. Temporary assignments at the new NAA facility include, R. H. Kemp, chief engineer and J. C. Newton, chief of material. Harry Rankin has been named chief inspector; H. E. Gregg, personnel manager, and J. S. Mathews, director of labor relations.

T. T. Hinman has been appointed manager of military sales and Max Helzel manager of commercial sales for Lockheed Aircraft Service, Inc. Helzel will operate at N. Y. International Airport and Hinman will work out of Washington, D. C. Both jobs were previously handled by George C. Stewart, who has resigned to become eastern representative in Washington for Fletcher Aircraft.

Honors and Elections



S & W HONORED—Seaboard & Western Airlines' president, Ray Norden (left), holds merit award presented to carrier by Reserve Officers Assn. for contributions "to the national defense by providing logistical support to the USAF in connection with the Berlin Airlift in 1948 and during the UN action in Korea." At Norden's left is Lt. Col. W. E. Hopper, Jr., head of ROA's Manhattan, N.Y., chapter, and Brig. Gen. D. B. Adams, of the 1303 Logistical Division.

INDUSTRY OBSERVER

► Initial programmed cost of a minimum radar net for the North American continent—up the West Coast, across the Alaskan-Canadian polar frontiers and along our East Coast—will cost upward of \$5 billion, according to a recent Pentagon forecast. The figure does not include personnel training nor annual maintenance. Radar detection stations already ring vital continental U. S. areas in an "island" system of defense. Armed fighters of Eastern and Western Air Defense forces are now challenging "unidentified" or "off pre-determined course" aircraft flying near these areas. So far, investigation has shown challenged planes to be friendly.

► Entire lateral tail surfaces of North American F-86E are controllable to give the aircraft finer longitudinal control at high subsonic speed. Control of ailerons, rudder and the all-movable tail surfaces is maintained through an independent power source instead of the conventional power "boost" system, to give a more positive control. Named "irreversible control," the new system eliminates the tendency of conventional systems to neutralize as air loads bear down upon the surfaces in flight.

► Third prototype of the British-built Saro SR/A1 jet flying boat is now undergoing flight tests to provide U. S. and British governments operational combat possibilities of the fighter flying boats. Following completion of the combat series, the plane will undergo additional tests in evaluation of flight characteristics for U. S. Navy BuAer. SR/A1 is a single-seat fighter powered by two 4000-lb.-thrust Metrovick Beryl turbines. Armament is four 20mm. nose cannon, two 1000-lb. bombs or eight 5-in. rockets. Plane has a combat endurance of 1 hour; twice that with use of external fuel tanks. First two planes crashed during tests.

► Air Force has 40,000 units of high intensity runway lights on current order, expected to fill USAF needs for this type of lighting through 1952. Total dollar volume exceeds \$735,000.

► Lighting equipment builders are struggling to meet USAF requirements for high intensity approach lights. Present equipment has been ruled out for military landing fields because of the obstruction hazard they present to jet aircraft. Units in operation in continental U. S. and abroad are for experimental use only.

► Taxi tests of the French SO-4000 twin-jet bomber have been resumed at Orleans Brioy Airfield. Taxi tests were halted after collapse of the nose wheel of the tricycle landing gear. Powered by two Hispano-Suiza Nene gas turbines, SO-4000 has a wingspan of 58 ft. 6 in., length of 64 ft. 9 in. Design performance specs call for speed of 516 mph. at sea level.

► Canadian National Research Council is testing aircraft skis designed to eliminate two major difficulties of snow operation in the far north—sliding resistance and adhesion. Sliding resistance of present aircraft skis on snow is sometimes so great that it is impossible to reach flying speed, the Council reports. Similarly, when skis remain stationary on snow for even a few seconds, adherence is often so great that it is almost impossible to break them free.

► Negotiations are in final stage for lease of the Globe Aircraft plant, Ft. Worth, Tex., by Bell Aircraft to build B-36 and B-47 jet engine nacelles for Convair and Boeing. The 78,000-sq.-ft. plant occupies 155 acres. Bell plans to employ 400 persons at the plant, now used as a Government Services Administration storage depot. Plan already has Munitions Board approval and awaits final OK by GSA. Package nacelles will include complete powerplants for the B-47 and B-36. The Globe plant is under Navy cognizance.

► Although Ryan Aeronautical has announced it will discontinue Navion production after turning out 150 new models, the company is going ahead with plans to certificate a new model of the four-place plane at 3200 lb.—up about 300 lb. over the present model. The new model will be designated Navion C, and Ryan hopes for certification in about nine months.

Foreign Aid Jet Plane Deliveries Speeded

F-86 and F-84 to be shipped in quantity to France, England.

Top officials of the Defense and State Departments are secretly pushing a general speed-up in re-armament of Western Europe under the Mutual Defense Assistance Program, with heavy shipments of jet fighters starting immediately.

- Nearly 500 F-86 Sabres will go to Britain's Royal Air Force, and eventually the plane will be manufactured in France.

- About 300 F-84 Thunderjets will be shipped to European nations next year, with approximately 800 of this type expected to be in French and Italian hands by the end of 1952.

Deliveries of aircraft, shares and equipment under MDAP are moving into high gear. By next September it is anticipated that the halfway mark will be reached in the \$1-billion-plus program.

The U. S. contribution of aviation aid to MDAP nations totals \$1,150,596,849 and stems from three sources:

- Air Force, responsible for the lion's share, has earmarked \$1,113,442,117 from its fiscal 1951 appropriation.

- Navy is putting up \$30,061,588 out of its fiscal 1951 funds.

- Army is committing \$5,093,144 of its fiscal 1951 funds for purchase of liaison aircraft.

The Defense and State Departments have ordered the MDAP deliveries speeded up in an attempt to beat the spiraling costs of materiel shortages in major raw materials, and the increasing tension—economic, military and political in that area.

But a deterrent to rapid acceleration of MDAP is the political red tape inherent when governments of nations must agree on fine points of the working machinery of a program international in scope.

Basic strength of Western Europe is its huge industrial capacity—still greater, according to official sources, than that of Russia and its satellites. Its weakness lies in inadequate army, navy and air forces. Politically, Western Europe generally suffers from weak morale.

- **Tactical Air Requirement**—To speed rearmament of Western Europe, in keeping with North Atlantic Treaty Or-



F-86 SABRES will be built in France although 500 made in U. S. will go to Britain.



F-84 THUNDERJETS will go to France and Italy, with 800 shipped by end of 1952.

ganization agreements, the Western Group will concern itself mainly with air transport and special emphasis on tactical aviation. This is in addition to other factors of military defense.

- **North American F-86 Sabre** will be standardized for production in Western Europe as this nation's contribution to tactical air defense of NATO nations. Tests are now under way at Edwards AFB, Muroc, Calif., of a Canadian Avro Orenda-powered version of the F-86. On the basis of the improved performance of the plane with the 6500-lb.-thrust Orenda, the Canadian engine will probably be used to power F-86s scheduled for export under MDAP. Canadair, Ltd., now licensed to build the F-86F in Canada, currently uses the General Electric J-47.

- **Republic F-84** also figures heavily in USAF MDAP commitments. The Thunderjet is also under consideration for manufacture in France and in Italy, although no decision has been reached as yet.

- **Industrial Rehabilitation**—Revised fiscal year 1950 estimates of financial

defense potential for treaty nations was set at \$18,326,000. But these funds were virtually frozen to expenditure on basic commodities only and provided no real assistance to the building of industry.

Legislation provided for in the overall fiscal 1951 budget boosted these funds \$475 million. Most important to North Atlantic Treaty nations in new legislation was the fact that this money could be spent in actual industrial rehabilitation.

Of the \$475-million total, Defense Department estimates approximately \$110 million is allocated for rebuilding and expanding treaty nations' aircraft industry. Production potential as a result of that expenditure is estimated at approximately \$607-million worth of tactical aircraft and engine production of approximately \$64 million.

Estimates being programmed at the Department of Defense also provide for meeting deficiencies in all activities relating to air power. Major emphasis is to be given industries developing radio,

radar and wire communications, ammunition, bombs, rockets, machine guns. Parallel procurement is planned for motor transport and special purpose vehicles for aircraft refueling and operations.

- **Transports**—Secondary consideration of nations allied in the North Atlantic Treaty Organization is the build-up of the air transport industry. Cargo planes under scrutiny of defense planners for foreign manufacture are the Douglas-licensed Canadair DC-4M and the Fairchild C-119.

Fairchild Engine & Airplane Corp. officials have already been approached by British and Canadian representatives in connection with the possibility of licensing the C-119 for manufacture both in Canada and in England (AVIATION WEEK Sept. 18). Despite the fact that the company is reported to have turned down offers of both nations, military sources insist that the plane is scheduled for foreign production.

Military reports over the impending foreign licensing of the C-119 are borne out by the fact that France, Italy and England are scheduled for quantities of the C-119. Secondly, Fairchild is working out design problems of a heavier four-engine version of the Packet which indicates that USAF is nearing programmed phase-out of the present twin-engine configuration.

More than 50 Fairchild Packets were ordered in fiscal 1950. Additional orders for nearly 200 were placed by USA out of fiscal 1951 regular and supplemental funds. Of this number, slightly over 30 were purchased for Navy. By July, 1951, well over 200 Packets will be in operational status for USAF.

Decision to license the Canadian Douglas DC-4M for manufacture both in England and in Italy, military sources state, stems from two MDAP decisions:

- To standardize on equipment of the Allied nations.

- To utilize end products of all those nations toward building a United Nations air force.

- **Immediate MDAP Transfers**—To meet the more stringent material needs of nations of the North Atlantic Treaty, USAF and Navy are transferring some of their World War II aircraft. Both services have ample quantities of piston-engine fighters and light bombers in storage throughout the U.S. and in Europe.

Republic F-84 jet fighters now in use by USAF both in England and in Germany are scheduled for transfer to England and France late next spring. Their transfer will be effected as soon as production of other fighter types in the U.S. is sufficient for replacements to be sent over.

- **British Reliance**—Reason for British

reliance on U.S. production fighters stems from the upset of its national economy during World War II. Great Britain has been forced to a continuing program of research and development in military air requirements rather than to settling on production of "in-being" air weapons.

Examples of this situation are the Hawker P. 1081 and the Vickers Supermarine 535, both of which have an enviable performance record. Despite the present international tension, neither has been placed in production. Reports from England indicate that production is not planned.

British policy, whether forced by economy or by some other dictate, has one serious drawback, U.S. military sources state.

In event of a sudden "emergency," the British Commonwealth might not be able to get into production soon enough to defend itself.

- **French Requirements**—French air officials have told AVIATION WEEK that what is most urgently needed by the French government is technical assistance. Of course, we too, these officials state, have immediate requirements for aircraft in quantity if we are to hold up our portion of the Western alliance.

But what is needed most are technical teams to give know-how to the French, and then assistance toward rehabilitating their aircraft industry—plane and engine-wise.

Decision by the NATO nations of whether to rearm Germany will have a tremendous impact upon the speed-up of North Atlantic Treaty Organization's entire rearmament program.

- **Republic F-84** also figures heavily in USAF MDAP commitments. The Thunderjet is also under consideration for manufacture in France and in Italy, although no decision has been reached as yet.



HAND-LOADING of mail is too costly and slow if airlines want to do a big mail business.

Mail Means Money, PO says

Airlines can take bigger share of \$300 million a year business with special planes, claims new official.

The \$300 million-a-year business of transporting domestic mail—99 percent of which now moves by surface carrier—has developed into a new traffic frontier for air carriers.

New Assistant Postmaster General, John Redding, in an interview with AVIATION WEEK puts the challenge: "It's up to the air carriers themselves. The gap is closing between the cost of shipping by surface and air. If the carriers have the enterprise to close the gap still further—by bringing highly economic planes for mail carriage into service and improving handling techniques

—mail could become bigtime business for the airlines."

- **No Parity Yet**—The cost difference is still great. Post Office payments to surface carriers for domestic mail transport—first, second, third, and fourth class—now averages 8.33 cents a ton-mile (from Association of American Railroads). This compares with 50-to-60 cents a ton-mile to the Big Four airlines for airmail, including parcel post. Payment to all air carriers averages \$1.32 a ton-mile (from Air Transport Assn.).

But two factors, now in the offing, could radically alter the situation:

• **Rail cost boost.** Railroads, which carry all but a small fraction of domestic mail, are seeking a 95-percent pay increase in the four categories. This would bring the average payment to the rails for mail shipments from 8.33 cents to over 16 cents a ton-mile.

• **"Mail" plane.** Post Office is surveying designs for a plane specifically suited to mail service, but believes air carriers should take the initiative. One aeronautical firm has designed an all-mail plane which it estimates could transport mail over long hauls with a high load factor for 10 to 12 cents a ton-mile. It would carry four truckloads, compared with the Fairchild Packplane's capacity of one truckload, and would be equipped with the labor-saving and cost-cutting hydraulic-lift detachable chassis of the packplane.

(Slick Airways, all-freight line, has offered to haul mail for the Post Office for 15 cents a ton-mile).

The prospect is that the rails will be granted in the neighborhood of a 40-percent increase in mail pay, rather than the 95 percent they are seeking. This would raise surface mail pay to an average 11.66 cents a ton-mile. This would then be the new cost level airlines would have to meet—or at least approach—to make a substantial inroad into the mass mail market.

"They are never going to get it the way they are going now," Redding commented. "The air carriers have concentrated on passenger traffic and ignored cutting costs to us. With some minor improvements, they are still loading mail as they were in 1928. They are still following the costly method of manually handling one sack at a time."

► **Big Market**—There is over 3070 million ton-miles of domestic mail business a year. The airlines now move only about 27 million ton-miles of this. A

shift to the airlines would have two national defense benefits: It would build up civil airlift and release cars, now in acute shortage, for defense business.

When, and if, airlines move into the mass second-, third-, and fourth class mail business, income won't keep pace with the volume increase. In the 1949 fiscal year, for example:

Surface carriers moved 3030 million ton-miles and received \$253 million for doing it. The airmail volume of 40 million ton-miles was only a drop in the bucket compared to this, but air carriers were paid \$54 million.

The outlook is dim for shifting short-haul business from surface to air. Volume would not justify large economical planes, frequent stops would add to the cost, and there would be little, if any, time-saving.

But Redding is optimistic over mass transfer of long-haul business from surface to air. One type operation, for example, which appears feasible: transcontinental all-mail runs with stops at three or four major cities. Mail would be fanned out from the city airports to smaller points by whatever transport method would be most economic—air, truck, rail. Ability of the operation to compete with transcontinental surface service hinges on development of a highly economic mail plane.

Redding's primary mission at the department is to improve service by cutting operating costs—for surface as well as air. For the past several years, the department plodded along with costly, outmoded methods of operation and sought to offset its mounting annual deficit with postage increases.

► **Post Office Survey**—"But that is putting the cart before the horse," Redding observed. With the approval of the President, he has launched a survey to

determine how and where Post Office costs can be cut—through mechanization of handling, utilitarian "factory" type post offices instead of "palaces with foyers," channeling mail into the most economic mode of transport.

Field studies are now under way, under the immediate direction of the 15 regional general superintendents of the Postal Transportation Service. The program to cut operating costs will be continuous, but Redding hopes to have proposals for some cost-cutting changes in a few months.

If he succeeds, future demands for increases in airmail and other postage rates—bound to come if Post Office's deficit keeps mounting—may be averted.

Excess Profits

Airlines' circumstances call for special tax treatment, ATA says.

The airlines must get very special consideration if Congress decides to levy an excess profits tax, Air Transport Assn. President Robert Ramspeck told the House Ways and Means Committee recently.

In putting forth proposals for the Committee, Ramspeck is firing a shotgun at long range. Each shot carries a special proposal. That is because it is too early to know just what will be the final target, after Congress has worked on the excess profits problem.

ATA isn't asking for complete exemption from excess profits legislation although it believes it can make a fair case for total exemption—with the point that airlines are in a way a part of the Armed Forces, that they need all their belated profits to build up their capacity, and that they are an armed reserve organization.

The alternative to asking outright simple exemption from EPT is to suggest several ways that any EPT law may give the airlines some breaks.

Chief arguments for the airlines are:

- **No profits at all** were made by most airlines during the base period 1946-49 proposed by Secretary of the Treasury John Snyder. So all profits would be excess profits if the levy were based on the average 1946-49 as normal.

- **High debt ratio** of many airlines would penalize them under the administration-proposed invested capital base for figuring "normal return." Average airline's debt is 38 percent of its invested capital, including earned surplus. With some lines, like Capital Airlines, debt is more than 50 percent. The administration would allow only a return of 5 to 8 percent on invested capital—after disallowing part of the debt portion of that invested capital.

Secretary Snyder's most favorable definite proposal is the invested capital formula for EPT. Mr. Ramspeck shows that the record airline earnings of this year 1950 would come to only a 3 percent profit on investment under the Snyder proposal. The 3-percent formula would cut an estimated \$45 million operating profit to \$15 million.

- **Airlines' growth penalized** under any formula suggested by Snyder based on a "normal" profit, as opposed to an "excess" one.

- **Defense preparation** inherent in airline profits and subsidies plowed back into new planes would be curbed by the excess profits tax formulas.

CAB, charged with responsibility for building airlines, figures they need profits of roughly 7-10 percent for normal equipment and traffic development.

► **Recommendations**—The following are some of the special angles Ramspeck suggests Congress should write into the Excess Profits Law to allow reasonable airline income and growth.

- **Exempt mail pay.** The airlines urge that mail pay be excluded from the income subject to the EPT. Problem here is that an unknown part of mail pay is plain revenue for carrying the mail. The natural thing would be to exempt subsidy from government tax. But no one has ever been able to figure how much of mail pay is subsidy and how much for mail carriage. So the airlines say exempt all mail pay.

- **Rate of return on invested capital** should be figured on 100 percent of all capital invested, including debt. Rate of normal return should be no less than that allowed by the CAB when it establishes mail rates.

- **Allow normal growth.** The airlines, like the television makers, are in a period of rapid natural growth. When Secretary Snyder made his tax proposal to the Ways and Means Committee, he did suggest there should be a formula to give special treatment to companies

just getting started during the base period. But he offered no details. He left that up to the "growth companies" themselves.

- **Change the formula**—The suggested formulas for figuring normal airline earnings are these:

- **Change the base** to 1946-50 instead of 1946-49.

- **Pick the best year** of earnings in the 1946-50 period as base instead of the whole period.

- **A moving base period** would be even better. This would allow for "actual physical expansion" occurring between the end of the base period and the taxable year. This would recognize a normal return per unit of capacity.

- **Physical growth formula.** The ideal allowance for company growth would be figured on actual increase in physical carrying capacity of the airlines. While a statute laid down by Congress could not earmark the exact units of planes, says Ramspeck, it could set the general principles for the Treasury Department in figuring specific regulations.

ASME Hears Cargo Solutions

Our future air cargo problems should all be little ones if we would only get into being a fleet of:

- **Boeing Stratofreighters**, says Alan F. Kelsey, of Boeing Airplane Co.;
- **Douglas DC-6As**, says J. R. McGowen, Douglas Aircraft Co., Inc.;
- **Douglas C-124A Globemasters**, says S. S. Kreisler, also of Douglas.;
- **Some of everything**, says Lt. Col. L. S. Rochte, chief of AMC's Air Cargo Branch.

These statements were made, in expanded forms showing only minor variations, at the Air Cargo Day sessions of the annual meeting of the American Society of Mechanical Engineers (Nov. 26-Dec. 1, 1950).

The air cargo meeting was co-sponsored by the Institute of Aeronautical Sciences and the Society of Automotive Engineers.

► **Strotofreighter** — Boeing's Kelsey voiced a plea for resolving the basic differences between military and CAA requirements for air cargo craft in order to make a commercial cargo fleet instantly available in the event of national emergency. He used as an example the Air Force requirement for power section fire extinguisher systems in the engine nacelle, which CAA does not require.

Kelsey also claimed that ten Strato-freighters, used exclusively for the purpose, could have evacuated all the Americans wounded during the first few months of the Korean war from Tokyo to the United States by air.

► **Douglas DC-6**—An airlift of a different type was used by McGowen, of Douglas. He stated that 200 new DC-6A transports could airlift all the cargo carried during peak World War II operations of both Air Transport Command and Naval Air Transport Service.

After showing that the Douglas DC-4 (or C-54) is the standard commercial four-engined cargo craft, McGowen went on to demonstrate just how much better the new DC-6A is as a cargo carrier.

► **Globemaster III** — Douglas' second contribution to the air cargo fleet was envisioned as a division-mover in fleets of 80. Kreisler claimed that an entire division of 16,000 armed men could be moved from Westover Air Force Base, Mass., to the vicinity of Brest, France, with two refueling stops on route.

Another 80 Globemasters would be needed to move 2500 tons of divisional equipment over the same route.

► **Static Display**—As an adjunct to the presentations, there was a static display of a number of airplane models, cargo handling equipment and procedures provided by the manufacturers, airlines and terminal authorities.

Liaison Planes Competition Starts

Air Force liaison plane competition gets under way at Wright-Patterson AFB, Ohio, this week with 21 aircraft companies competing for a production order of 300 planes (AVIATION WEEK Nov. 13).


Competition requirements include the following: must be four-place and include provision for field conversation to transport of two litter patients, attendant and pilot, or equivalent light cargo; instrumentation for night and limited weather operation; 250 mi. flying radius; 5 hour minimum endurance; cruising speed minimum of 110 mph.; service ceiling minimum, 15,000 ft.



NEW SUPER CUB GETS OFF FAST

New Piper Super Cub for 1951, powered by 125-hp. Lycoming, shows agility during demonstrations at Flushing Airport, N. Y. With a light load the plane can get off the ground in about 75 or 80 ft. With two people aboard it has easily cleared a 20-ft. barrier 150 ft. from start of takeoff. Rate of

climb is over 1000 fpm. at 1500-lb. gross weight. It can be flown at 33 mph. with flaps down. Another version has the 90-hp. Continental engine. All models are finished with nonflammable Duraclad butyrate plastic. The 125-hp. Super Cub sells for \$3695 and the 90-hp. plane for \$3295.

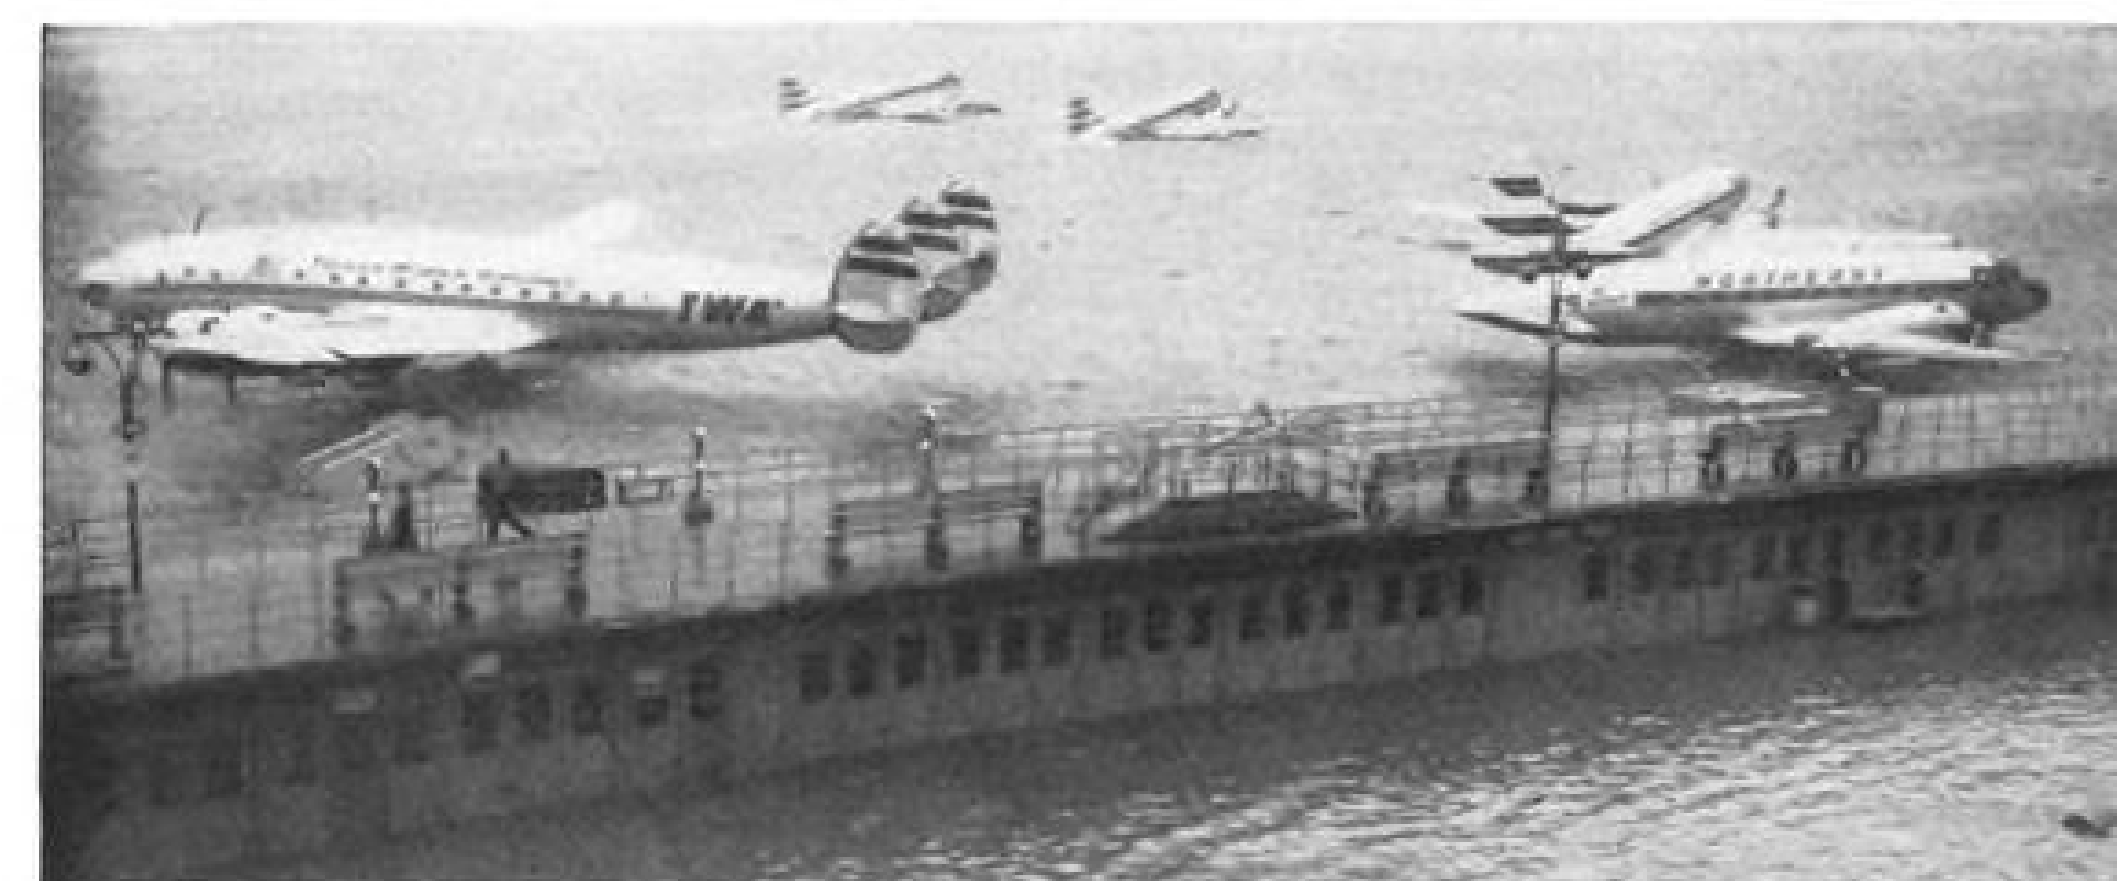

LAKE LA GUARDIA

Scene at La Guardia Field during the destructive storm which hit the eastern seaboard on Nov. 25 shows a TWA Constellation, a Northeast Convair-Liner and three NEA DC-3s riding out the gale which had some portions of the field under about 13

ft. of water. The field was out of operation from 11 AM. Saturday until 6 AM. Sunday. The promontory stretching across the picture is normally the combination loading gates structure and public observation platform.

Washington Roundup

Defense "Economy"—Again?

There's a new move to cut back on defense. It's main-spring: State Department.

Backstage, State fought former Defense Secretary Louis Johnson's "false economy" program—which set Air Force back from the 58-group program voted by Congress to a 48-group program and slashed naval aviation. The \$13 billion ceiling Johnson program trimming the country's defense strength weakened U.S. prestige abroad—and State's voice in world affairs.

But the \$40-\$50 billion budget for U.S. Armed Services that military leaders now have in sight has State worried. It would probably mean trimming the economic and military spending abroad that is the backbone of State's foreign policy.

Advance by Retreat?

State Department officials, backstage, are now citing a new version of the Johnson thesis that defense strength can be increased by decreasing expenditures. Johnson claimed it could be accomplished by "coordination", eliminating administrative personnel. State officials are now proposing that cutbacks in "unnecessary" supporting operational personnel for fighting units will accomplish the two conflicting desirables: a spending decrease and a defense increase.

- **Air Force**—which has had a manpower board working for over two years to make "ruthless" slashes in administrative and supporting personnel—is particularly irritated and sensitive to hints that it's over-staffed with deadwood.
- **USAF: 80 Groups**—The "transitional" 69-group USAF program was passed on hurriedly by the Joint Chiefs of Staff after the Korean outbreak as a "stepping stone"—until a program could be worked out to assure adequate air strength to defend the U.S. and meet its fighting obligations that might develop at points around the world.

After conferences with the JCS, congressional military leaders are convinced that this is the "bare minimum" and "must" program for USAF:

- **Strategic Air Arm**—35 groups, including six heavy bomber groups, to retaliate on an aggressor. Finletter Commission recommended only two heavy bomber groups for offensive action.
- **Air Defense**—22 1/3 groups, or 67 squadrons. This force is necessary to keep up a 24-hour alert for attack from any approach.
- **Tactical Air**—One group for each army division. This would be 20 groups—if Army is built up to the 1.5-million-man or 20-division strength military leaders consider necessary. In addition, USAF should have three tactical reconnaissance groups: an east-based, west-based, and "seed corn" group—for training replacements for groups that might move to fronts.

It adds up to an 80.3-group USAF.

The groups would be militarily stronger than the groups contemplated in the Finletter Commission's 70-group program of 1948—and they are functionally reorganized for more effective offensive and defensive action and ground support. The Finletter Commission, for example, didn't gear tactical aviation to Army division.

Price Rises—Or Miscalculation?

BuAer reports that reductions from mass aircraft procurement are off-setting price increases. But USAF says prices are skyrocketing and has requested an additional procurement appropriation to off-set the rises—which will come between \$500 million and \$1 billion.

BuAer officers think USAF miscalculated, on the low side, in its original estimates. USAF officers think BuAer originally miscalculated, on the high side.

Fight or Fizzle?

Write off the big advance billings given the tactical aviation hearings which Chairman Carl Vinson announced his armed services committee will hold. The key question now is whether there will be any hearings at all. Vinson is non-committal on this. He called the public sessions after USAF tactical support in Korea "didn't turn out to be all that it was supposed to be". But, since then, USAF and Army have cooperated to improve ground-air maneuvers. This was the purpose of the hearings.

If they do come off now, the hearings will amount to a cordial situation report by the services—not the inter-service row "matching the B-36 conflagration" anticipated in some quarters.

Triple-Deck Airports

Airport operators now look on "vertical" expansion instead of "horizontal" expansion as the only way to solve the increasingly serious problem of terminal ramp congestion. Philadelphia's master airport plan makes the first step in the vertical expansion direction with a double-deck airport: planes and freight would be handled on the airport ground level, passengers would exit from the plane on a ramp parallel from the plane door to a second story of the airport. Under the triple-deck plan, airport operators are now considering, mail and freight would be handled on a subway floor, leaving additional space for planes on the airport ground floor, and passengers would take off from a ramp to a second floor.

Here and There

- **Fixed base operators:** A sizable portion object that USAF's plan to rehabilitate bases—possibly three—to train pilots under civil contract is "extravagantly wasteful." There are plenty of commercial bases ready to train pilots, they say.
- **Air academy:** USAF will make a new drive for it at the beginning of the year. Over a hundred Congressmen are tangling to have it located in their home state.
- **Francis Deak**, new chief of the State Department's aviation division, has no doubts Pan Am will eventually be permitted into Paris and Rome: "But the case is moving slowly." He was formerly air attache at Berne, handling air affairs for the entire eastern European area.
- **Newly-elected Sen. Everett Dirksen** will be active on civil aviation. He served on the special Air Safety Committee, headed by the late Rep. Jack Nichols and was a leader in the fight for a standing aviation committee in the House, during his service there.

PRODUCTION

AF Contracts

Cappel McDonald awards for over \$3 million lead negotiated list.

U.S. Air Force negotiated 54 contracts of \$25,000 or more in the period Nov. 13-17 for a total of \$11,922,646, the Air Materiel Command reports.

Leading the list for the week was Cappel McDonald & Co., Dayton, with two contracts totaling \$3,184,918 for long-range sustenance kits. Only other contract in excess of \$1 million was with Sundstrand Machine Tool Co., Rockford, Ill., \$1,119,710 for alternator drives. Douglas Aircraft Co. received four contracts, totaling \$1,160,981, for aircraft spare parts.

List of negotiated contracts of \$25,000 or more for period Nov. 13-17 follows. Previous contracts (AVIATION WEEK Nov. 27) were for the period Nov. 6-10, rather than for Oct. 30-Nov. 3 as reported earlier by the Air Force.

Negotiated Contracts

- A. B. Dick Co., Chicago, duplicating machinery, \$101,049.
- Adel div., General Metals Corp., Burbank, Calif., valve assemblies and spare parts, Cl. 03I, \$45,702.
- Addressograph Multigraph Corp., Cleveland, printing presses and attachments, \$161,367.
- Addressograph Multigraph Corp., Dayton, duplicating machinery, \$250,675.
- Alar Products Inc., Cleveland, oxygen regulators, Cl. 03K, \$25,314.
- American Gas Accumulator Co., Elizabeth, N. J., rubber covered transformers, Cl. 08D, \$365,172.
- John Bean div., Food Machinery & Chemical Corp., Lansing, Mich., assorted tool sets, Cl. 17A, \$167,901.
- Blackhawk Mfg. Co., Milwaukee, rain & pump assemblies, Cl. 17B, \$44,200.
- Brown, Stewart R. Mfg. Co., Inc., New York, lamp assemblies, Cl. 08A, \$144,336.
- Cappel McDonald & Co., Dayton, long range sustenance kits, Cl. 13, \$942,018; long range sustenance kits, Cl. 13, \$2,242,900.
- Cardell Mfg. Co., Dayton, propeller stand assembly, Cl. 17C & 19C, \$50,638.
- Ditto, Inc., Chicago, duplicating machinery, \$69,028; duplicating machinery, \$30,334.
- Doebbe Metal Furniture Co., Inc., New York, office furniture, Cl. 40A, \$808,478.
- Douglas Aircraft Co., Inc., Santa Monica, Calif., aircraft spare parts, Cl. 01D, \$45,087; aircraft spare parts, Cl. 01D, \$45,894; aircraft spare parts and tools, Cl. 01D, \$270,000; aircraft spare parts, Cl. 01D, \$800,000.

- Dumont, Allen B., Laboratories, Inc., Clifton, N. J., cathode ray oscillographs, Cl. 17, \$47,328.
- East Coast Aeronautics, Inc., Mount Vernon, N. Y., arctic shelters and data, Cl. 19A, \$378,995.
- Eastern Rotorcraft Corp., Willow Grove, Pa., tie down devices, Cl. 03F, \$332,500.
- Eastman Kodak Co., Rochester, N. Y., photographic film, Cl. 10C, \$135,657.
- Electric Storage Battery Co., Cleveland, aircraft storage batteries, Cl. 03J, \$446,720.
- Fairchild Camera & Instrument Corp., Jamaica, N. Y., sext maintenance parts, Cl. 05E, \$68,425.
- Fibrous Glass Insulation Co., Inc., Wilkes-Barre, Pa., aerial delivery chute assemblies, Cl. 20, \$124,089.
- General Electric Co., Schenectady, N. Y., turbosupercharger regulator spare parts, Cl. 03E, \$140,420.
- General Electric Co., West Lynn, Mass., engine spare parts, Cl. 05E, \$44,995.
- General Tire & Rubber Co., Akron, clamp assemblies, runway markers, Cl. 08D, \$49,606.
- General Tire & Rubber Co., Akron, wheel and brake assemblies, Cl. 03B, \$36,776.
- Harrisburg Steel Corp., Harrisburg, Pa., cylinder assemblies, Cl. 06B, \$214,026.
- Hartman Electrical Mfg. Co., Mansfield, O., cut-outs and relays, Cl. 03C, \$80,869.
- E. Horton & Son Co., Windsor Locks, Conn., piston position indicator, Cl. 17C, \$52,575.
- Jamestown Metal Corporation, Jamestown, N. Y., weather sequence panels, Cl. 40, \$27,100.
- Lawson, div., Hart Carter Co., New Holstein, Wis., D-1 heater maintenance part, Cl. 19C, \$40,592.
- Liquidator Corp., Long Island City, N. Y., fuel and oil indicators, Cl. 05G, \$75,618.
- M B Mfg. Co., Inc., New Haven, Conn., engine mounts, Cl. 03J, \$257,400.
- McConaughy Stationers Inc., Springfield, O., weather station furniture & equipment, Cl. 40, \$93,890.
- McLeod Company, Cincinnati, sand blast cabinets, Cl. 17A, \$92,435.
- Minneapolis-Honeywell Regulator Co., Minneapolis, automatic pilot components, Cl. 05F, \$33,882.
- Murdoch Webbing Co., Pawtucket, R. I., nylon webbing, Cl. 21, \$39,750.
- Norma-Hoffman Bearing Corp., Stamford, Conn., ball bearings, Cl. 04D, \$25,568.
- North American Aviation, Inc., Los Angeles, aircraft assemblies & sub-assemblies, Cl. 01M, \$82,195; aircraft assemblies & sub-assemblies, Cl. 01M, \$30,954.
- Riverside Metal Co., Riverside, N. J., phosphor bronze metal round, Cl. 23A, \$83,385.
- Romec div., Lear Inc., Elvira, Ohio, air compressors, Cl. 16A, \$42,954.
- Schwieb Engineering Co., Los Angeles, vertical gyro indicators, Cl. 05C, \$117,900.
- Scintilla Magneto div., Bendix Aviation, Sidney, N. Y., exciter units and spare parts, Cl. 03C, \$82,332.

- Servomechanisms, Inc., Mincola, N. Y., rouge servos, Cl. 11B, \$88,000.
- Sperry Gyroscope Co., Great Neck, L. I., automatic pilot parts and tools, Cl. 05F, \$372,580.
- Sundstrand Machine Tool Co., Rockford, Ill., alternator drives, Cl. 03I, \$1,119,710.
- Taylor-Wharton Iron & Steel Co., Dayton, cylinder assemblies, Cl. 06B, \$140,421.
- Timken Roller Bearing Co., Canton, O., roller bearings, Cl. 04D, \$29,295.
- Vickers, Inc., Detroit, pump assemblies, Cl. 03I, \$283,611.

NAA Expands Production Plans

North American Aviation, Inc. is busy expanding and shifting around its production facilities to insure smoother operations.

Following on the heels of the company's acquisition of the Columbus, O., Curtiss-Wright plant (AVIATION WEEK Nov. 13), comes word of a new \$1-million-dollar building program.

► **More Space**—Additional manufacturing and warehousing space totaling 238,000 sq. ft. under cover will be constructed immediately south of the present warehouse, across the highway from NAA's Los Angeles plant at International Airport.

The added facilities will centralize the material division offices and release more floor space for F-86 work at Los Angeles.

First NAA will add 75,600 sq. ft. to the existing warehouse and put in a 33,600-sq. ft. mezzanine to take care of the material division offices. An additional 8000 sq. ft. will be added to the warehouse shed to provide storage for the increased stocks.

One of two new manufacturing buildings will total 108,000 sq. ft. It will be used for fabrication, housing extrusion forming, and sheet stretch-form operations, plus such processing as heat treat and degreasing. The other building, of 12,800 sq. ft. capacity, will take care of drop hammer and power hammer work. Machinery in the new buildings will be moved from present locations and the space thus opened turned over for assembly work.

► **Production Shuffle**—To step up production, NAA is rearranging some of its operations. The T-28 trainer project will be moved from Los Angeles to Downey, with T-6G output moving from Downey to Long Beach. Work on the B-45 Tornado will continue at Long Beach, but the control surfaces department will shift to the Torrance plant, where F-86 wing assembly is being undertaken.

NAA's aerophysics laboratory at Downey is also being enlarged. Here the company is working on missiles, sub-miniaturization of electronic parts and research on a practical nuclear

power reactor. Dr. Sidney Siegel, formerly manager of Westinghouse Electric Corp.'s atomic power division, is working at Downey as associate technical director of the Atomic Energy Research department, assisting Dr. Chauncey Starr, technical director of nuclear reactor studies.

Hughes Ups Wages

A five-percent pay boost plus four cents added to base hourly rate has been agreed to by Hughes Aircraft Co., Culver City, Calif. The increase amounts to from ten cents to 15 cents an hour. Salaried employees are getting a 7.5 percent increase. The boosts add \$2 million to the company's annual payroll.

The deal was worked out between the company and Aircraft Industry Workers Local 1553, affiliated with the United Brotherhood of Carpenters and Joiners of America; the International Brotherhood of Electrical Workers, AFL; and the United Aircraft Welders of America.

Lockheed Calls for Subcontractors

Subcontractors are sharing increasingly in Lockheed Aircraft Corp.'s production of Air Force and Navy planes.

Cessna has been signed up to fabricate the empennage of the F-94 all-weather jet interceptors and T-33 jet trainers. Contracts for the Constellation and for Navy's P2V Neptune anti-sub patrol plane will also be announced soon, according to Lockheed.

The company prefers to subcontract major units, rather than a large number of small units and pieces. Lockheed's vice president and general manager, Courtlandt S. Gross, outlined this policy:

"As far as possible, we have selected major integral units that are simplest in design, least likely to be affected by engineering changes, and having the highest unit volume. The plan leaves Lockheed with the more complicated center fuselage sections and cockpit flight stations, on which we feel our experienced and skilled workmen can do the best job."

Lockheed's employment is expected to rise from its present level of 17,000 to a peak of about 19,000 in the next 18 months. Three work shifts will probably be required in many sub-assembly and fabrication departments.

AF Invitations

Bid openings are 20-30 days after approximate issue dates shown in the following bid proposals. Bid sets containing specifications for items to be procured will be sent to

qualified applicants who state bid invitation number.

One bid set will be available for examination without obligation by prospective bidders, after bid publication date, at each of the seven AMC procurement field offices. This will enable firms to see specifications before writing or telegraphing for their own bid sets.

Procurement field office locations: Boston Army Base, Boston 10, Mass.; Government Aircraft Plant No. 4, Ft. Worth 1, Tex.; 39 S. LaSalle St., Chicago 3; Wright-Patterson AFB, Dayton, Ohio; West Warren and Longo Aves., Detroit 32; 155 W. Washington Blvd., Los Angeles; 67 Broad St., N. Y. 4.

INVITATIONS

Socket assembly, 200 each, bid invitation No. 51-988, issue date 3 Nov., delivery complete within 90 days.

Clothing, 1-25 items, bid invitation No. 51-989, issue date 3 Nov., delivery beginning within 90 days, complete within 210 days.

Connector-plug, 1-5 items, bid invitation No. 51-990, issue date 3 Nov., delivery 50% within 45 days, balance within 75 days.

Gloves, 1-6 items, bid invitation No. 51-992, issue date 3 Nov., delivery beginning within 45 days and complete within 60 days thereafter.

Connections, 1-10 items, bid invitation No. 51-993, issue date 3 Nov., delivery 50% within 30 days, 50% within 60 days after date of award.

Electric furnaces, 1-22 items, bid invitation No. 51-1023, issue date 6 Nov., delivery starting within 80 days, complete within 150 days.

Holists, 1-5 items, bid invitation No. 51-1033, issue date 9 Nov., delivery starting within 30 days and complete within 75 days after date of award.

Hose assembly, 200 each, bid invitation No. 51-1034, issue date 9 Nov., delivery within 60 days.

Aircraft hardware, 1-9 items, bid invitation No. 51-1035, issue date 9 Nov., delivery starting in 45 days, complete in 120 days after date of award.

Gaskets and packing, 1-23 items, bid invitation No. 51-1036, issue date 9 Nov., delivery starting in 45 days, complete in 90 days.

Connectors, 1-13 items, bid invitation No. 51-1037, issue date 9 Nov., delivery within 60 days after date of award.

Container assemblies, 1-4 items, bid invitation No. 51-1038, issue date 9 Nov., delivery, items 1 & 2 within 45 days; item 3 within 60 days; item 4 within 45 days after date of award.

Bar assemblies, 1-3 items, bid invitation No. 51-1039, issue date 9 Nov., delivery within 30 days after date of award.

Nuts, 1-15 items, bid invitation No. 51-1040, issue date 9 Nov., delivery starting within 45 days and complete within 90 days.

Air crew caps, 1-4 items, bid invitation No. 51-1041, issue date 9 Nov., delivery beginning within 90 days after date of award.

Lathes, 1-12 items, bid invitation No. 51-1042, issue date 9 Nov., delivery starting within 115 days and complete within 240 days.

Aircraft cable, 1-9 items, bid invitation No. 51-1043, issue date 9 Nov., delivery within 60 days after date of award.

Connectors, 1-5 items, bid invitation No. 51-1044, issue date 9 Nov., delivery within 60 days after date of award.

Connectors-plugs, 1-4 items, bid invitation No. 51-1045, issue date 9 Nov., delivery within 30 days after date of award.

Clothing, 1-5 items, bid invitation No. 51-1046, issue date 9 Nov., delivery starting within 30 days and complete within 90 days.

Connectors, 1-6 items, bid invitation No. 51-1047, issue date 9 Nov., delivery within 30 days.

Tank-hydraulic, 378 each, bid invitation No. 51-1056, issue date 10 Nov., delivery complete within 210 days.

Tester assembly, 52 each, bid invitation No. 51-1057, issue date 10 Nov., delivery

complete within 200 days after date of approval of first article.

Steel spring annealed strip, 1-8 items, bid invitation No. 51-1062, issue date 10 Nov., delivery within 90 days after date of award.

RF cable assembly, 400 each, bid invitation No. 51-1063, issue date 10 Nov., delivery within 90 days after date of award.

Capacitor, 1-10 items, bid invitation No. 51-1064, issue date 10 Nov., delivery complete within 60 days after date of award.

Brass, 1-37 items, bid invitation No. 51-1068, issue date 10 Nov., delivery complete within 90 days after date of award.

Connector-plug, 1-6 items, bid invitation No. 51-1071, issue date 10 Nov., delivery within 30 days after date of award.

Communications equipment, Class 16, 1-7 items, bid invitation No. 51-1072, issue date 10 Nov., delivery within 60 days.

Rubber-latex, 1-58 items, bid invitation No. 51-1020, issue date 16 Nov., delivery 50% in 30 days, 50% in 60 days.

Bolt, 1-100 items, bid invitation No. 51-1076, issue date 10 Nov., delivery to start in 45 days, complete in 120 days.

Aircraft hardware, C-1, 1-96 items, bid invitation No. 51-1079, issue date 10 Nov., delivery to start in 90 days, complete in 120 days.

PRODUCTION BRIEFING

► **Lockheed Aircraft Service International** has taken a two-year lease on a one-story warehouse covering 13,000 sq. ft. at 87-94 130 St., Richmond Hill, Queens, N. Y. The company is also handling electronic modifications on two Douglas B-26s operated by Sperry Gyroscope Co. Boeing has given LASI a contract to modify approximately 30 Stratocruiser nose landing gears on planes operated by PAA and BOAC. LASI is converting a Douglas C-54A to a C-54E for Seaboard & Western Airlines.

► **Aircraft Maintenance International, Inc.**, has signed a contract with Douglas Aircraft to refurbish two DC-6s used by Italian Airlines (LAI) which the carrier operated while awaiting delivery of new DC-6s.

► **Southwest Airmotive**, Dallas, has acquired an additional 54,000 sq. ft. of floor space at Love Field bringing the firm's total space to 170,000 sq. ft. The addition has been sub-leased from Braniff for five years.

► **Century Engineers**, Burbank, have received a contract from Lockheed Aircraft to do complete design of wingtip auxiliary fuel nacelles for the P2V Neptune.

► **Peterson-Fender Engineering Co.**, Ft. Worth, Tex., has added a 16,000-sq. ft. plant to existing facilities to expedite increasing aircraft subcontract orders.

► **Tinnerman Products, Inc.**, plans to begin construction soon on a new research laboratory adjacent to the office section of its recently opened \$2-million Cleveland plant. The new lab will cost about \$200,000.



Teamwork Gets Results!

THE AVIATION BUSINESS has a way of solving problems common to the industry that's as simple as it is direct—they get together!

Last September some 150 top technicians representing military and civilian air groups from all parts of the world got together for the sixth annual Champion Spark Plug and Ignition Conference.

The ultimate objective of these conferences is, of course, increasing the service life of spark plugs to the point where scheduled removal rates correspond to engine overhaul periods. There is little doubt, according to data presented by various airlines, that this objective is nearer than ever and it was the consensus that the Champion R37S-1 spark plug is a major factor in this improvement!

During the first six months of this year nearly 36 million route miles were flown by U.S. domestic trunk lines and U.S. international lines, and 95.4% of these miles were flown with dependable Champion Spark Plugs proving, once again, that in the air—as in every other engine field—Champion is America's favorite because of its better performance!


CHAMPION SPARK PLUG COMPANY, TOLEDO 1, OHIO

More Airlines Fly with CHAMPIONS than Any Other Make!




technical bulletin

New Electric Power Units Foretell Era of Pushbutton Flight... Faster aircraft and busier pilots are pushing automatic flight devices into the forefront. The development of versatile fool-proof power units to actuate control surfaces in conjunction with automatic pilots is a primary factor in achieving pushbutton flight. Such units are being produced by EEMCO in close cooperation with the designers and builders of tomorrow's aircraft.

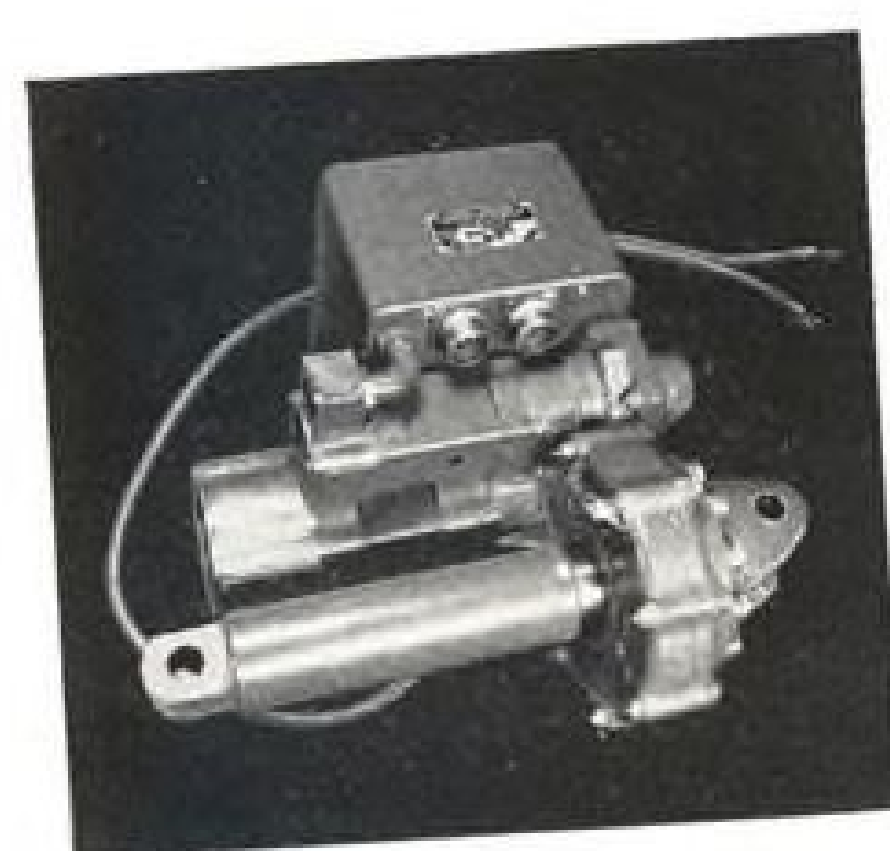

Stabilizer Actuator for Large Jet Fighters... One such "radical" advance is the motor actuator used on a new jet fighter. This unit incorporates two motors of different size, driving into individual gear reductions to operate the screw jack. Each fulfills a particular need and is not to be considered a standby. The small motor of 1/10 h.p. output operates practically continuously under control of the automatic pilot and provides a rate of travel to jack of 6/100" per sec. The large intermittent duty 3.3 h.p. motor provides manual operation of screw jack by pilot for maneuvering and extreme situations with a rate of travel of 7/10" per sec. Normal operating load of unit 11,000 lbs....28 volt operation. Equipment includes overload and travel limit switches, radio noise filters, position indicator and non-jamming stops.

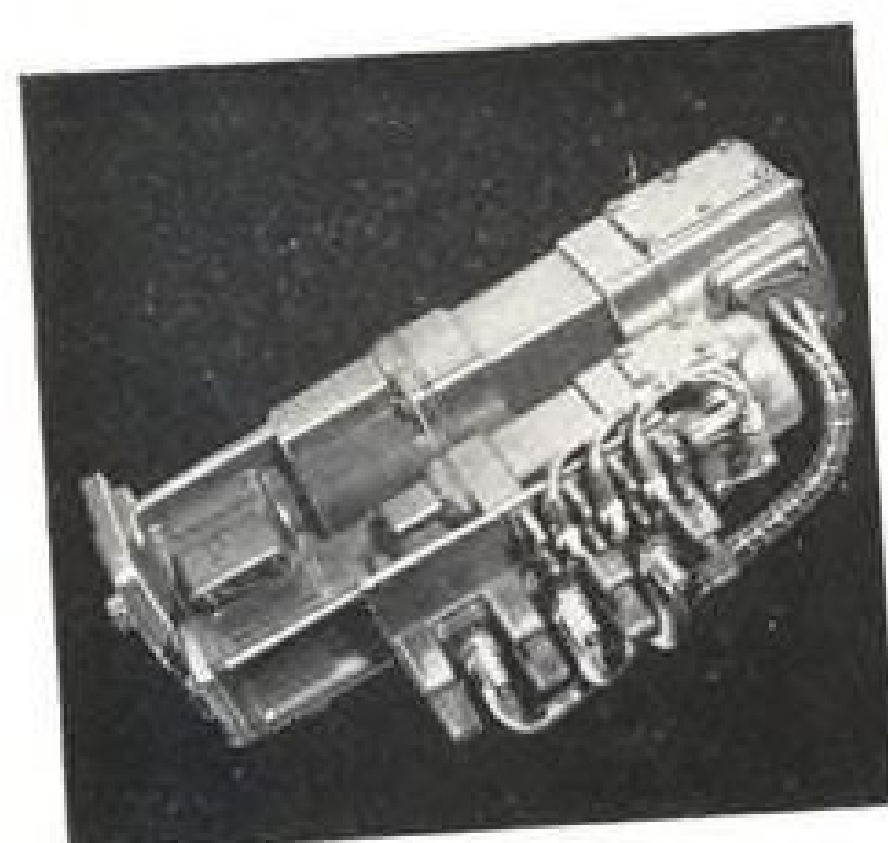

Double Motor Power Unit for Horizontal Stabilizer... A similarly unconventional motor arrangement operates the horizontal stabilizer actuator on a turbo-prop aircraft of recent design. A small continuous duty motor of 1/15th h.p. operating through a gear reduction is used for automatic flight and a large intermittent duty 3-1/2 h.p. with direct drive of 12,000 rpm is used for manual operation. The unique feature again is that it provides a large power source for maneuvering and a smaller unit for trimming in flight in small increments through the automatic pilot.

EEMCO Design and Testing Service Solves Difficult Actuator and Motor Design Problems... Tell us your requirements on current motor or actuator design problems. Include preliminary data on type of unit, specific function, special requirements, operating conditions, motor and actuator specifications and any available drawings, diagrams and tables.

**SEND FOR FREE
PERFORMANCE CHARTS
AND DESIGN DRAWINGS...**

Executives and engineering and design personnel making request on Company letter-head will be placed on mailing list for performance and design drawings of EEMCO designs for file and reference.



**ELECTRICAL
ENGINEERING
and MFG. Corp.**

4612 W. Jefferson Blvd., Los Angeles 16, California

AERONAUTICAL ENGINEERING

New High-Thrust Turbojet Seen for GE

Company's gas turbine engineers confident of leading British soon.

By Irving Stone

Lynn, Mass.—General Electric Co. is intensifying its activities in the aircraft gas turbine field, and a wide expansion may be expected soon.

Now, only 4 percent of GE's total labor force is engaged on its turbojet and aircraft instrument projects. But this figure will soon soar.

At GE's 287,000-sq. ft., Everett, Mass. plant, the company manufactures all components (except gear case and turbine wheel) for its turbojets assembled at the 375,000-sq. ft. Lynn works.

Also at Lynn are the company's new gas turbine laboratory (for full-scale and scale-model testing of compressors and combustion systems) and its aircraft instrument division.

► **Lynn Plus Lockland**—Another GE turbojet assembly plant is at Lockland, Ohio. This facility and the Lynn plant have been turning out jets at about the same rate for the past year.

But Lockland will soon see an expanded program. GE's engine design and drafting activities will be shifted to Lockland from Lynn in a move which should be complete by next June. This shift will include management personnel, too.


And in addition to engine assembly from subcontracted parts, Lockland will fabricate some engine components.

At Lynn, the usual turbojet assembly program will continue from parts fabricated at Everett.


► **New J-47s**—The company's present production program is concentrated on its J-47 jet projects. GE has just announced two new versions of this engine:

• **The J-47-GE-17** has an afterburner, high-altitude starting system, anti-icing provisions and an electronic control system. An additional, and highly important, feature of the -17 is that its strategic material content has been greatly reduced in comparison with the basic J-47s now powering AF planes.


A hint that GE was actively exploring the field of material substitution to reduce strategic metals in jets was revealed in AVIATION WEEK, May 8, which analyzed an SAE paper by Jerard M. Pedersen of GE's Aircraft Gas Turbine division.

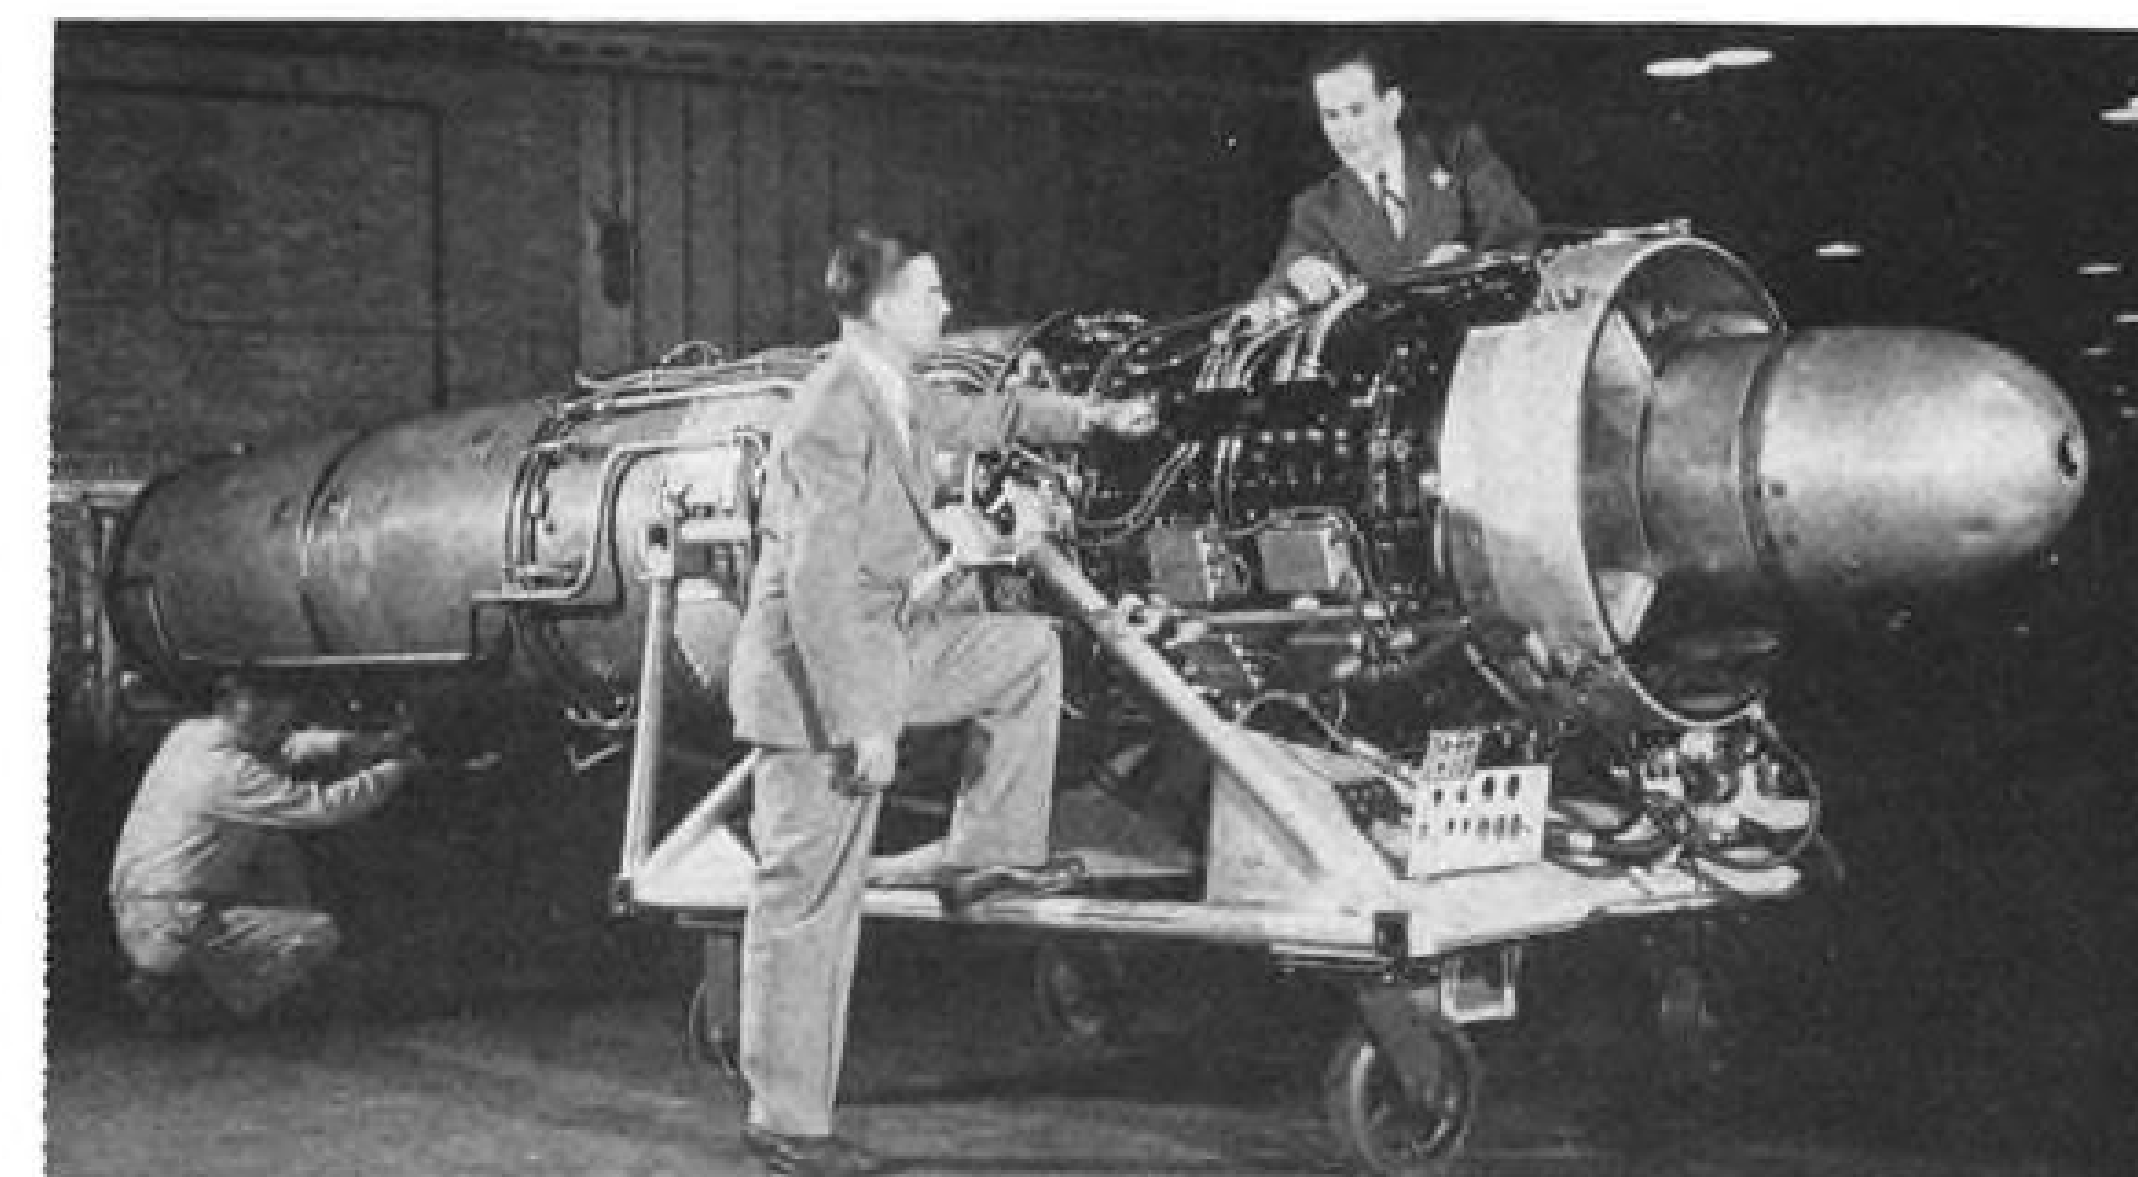


J-47-GE-17 has afterburner, deicing, electronic controls, and fewer strategic materials.

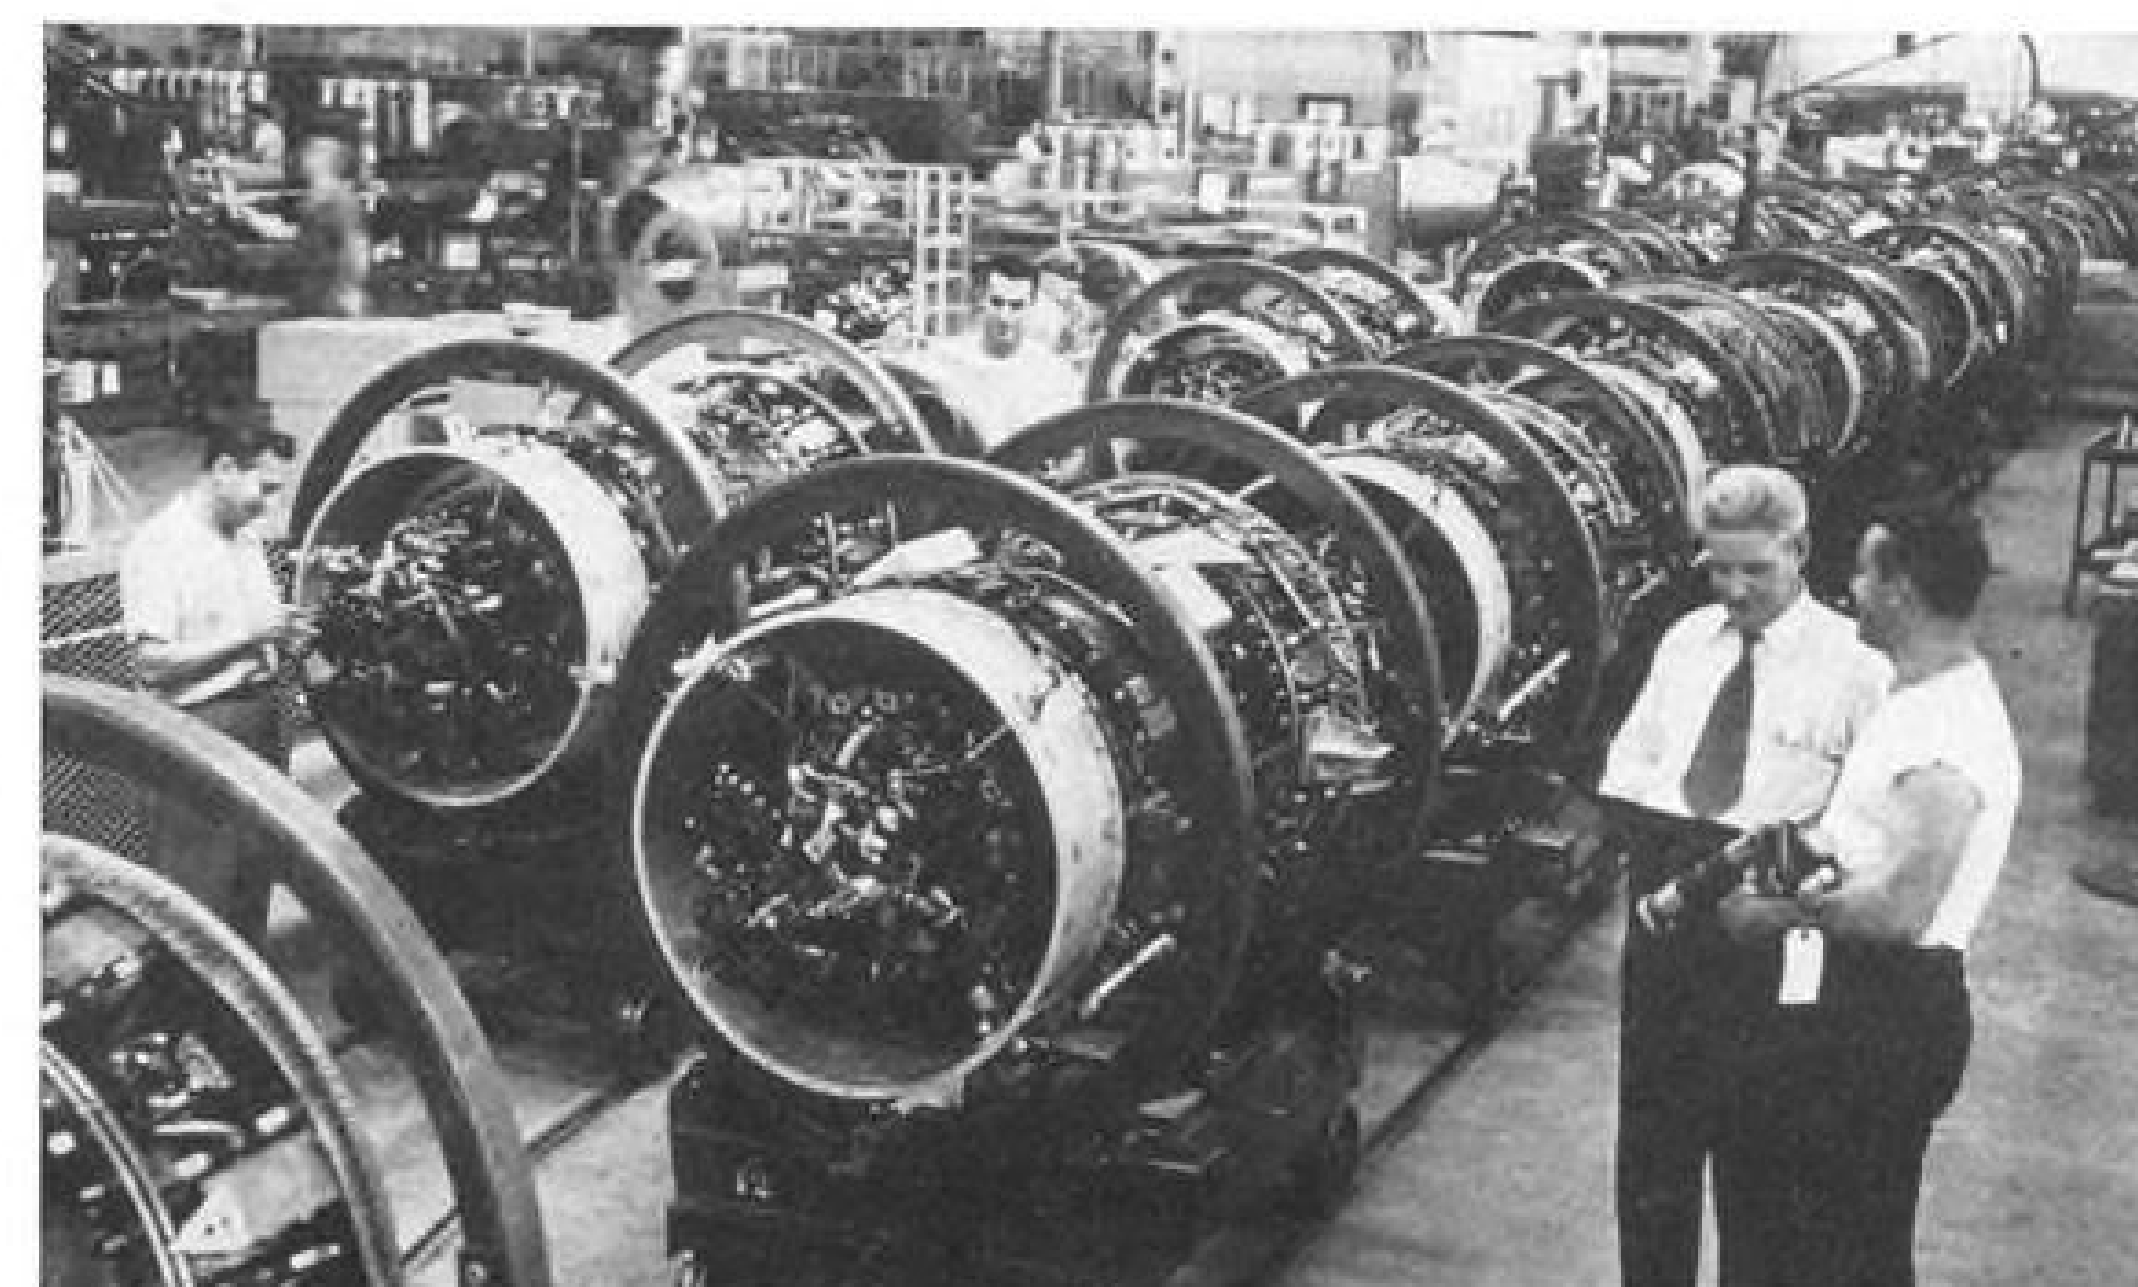


FINAL ASSEMBLY station just before routing jets to test cells for "green" run.

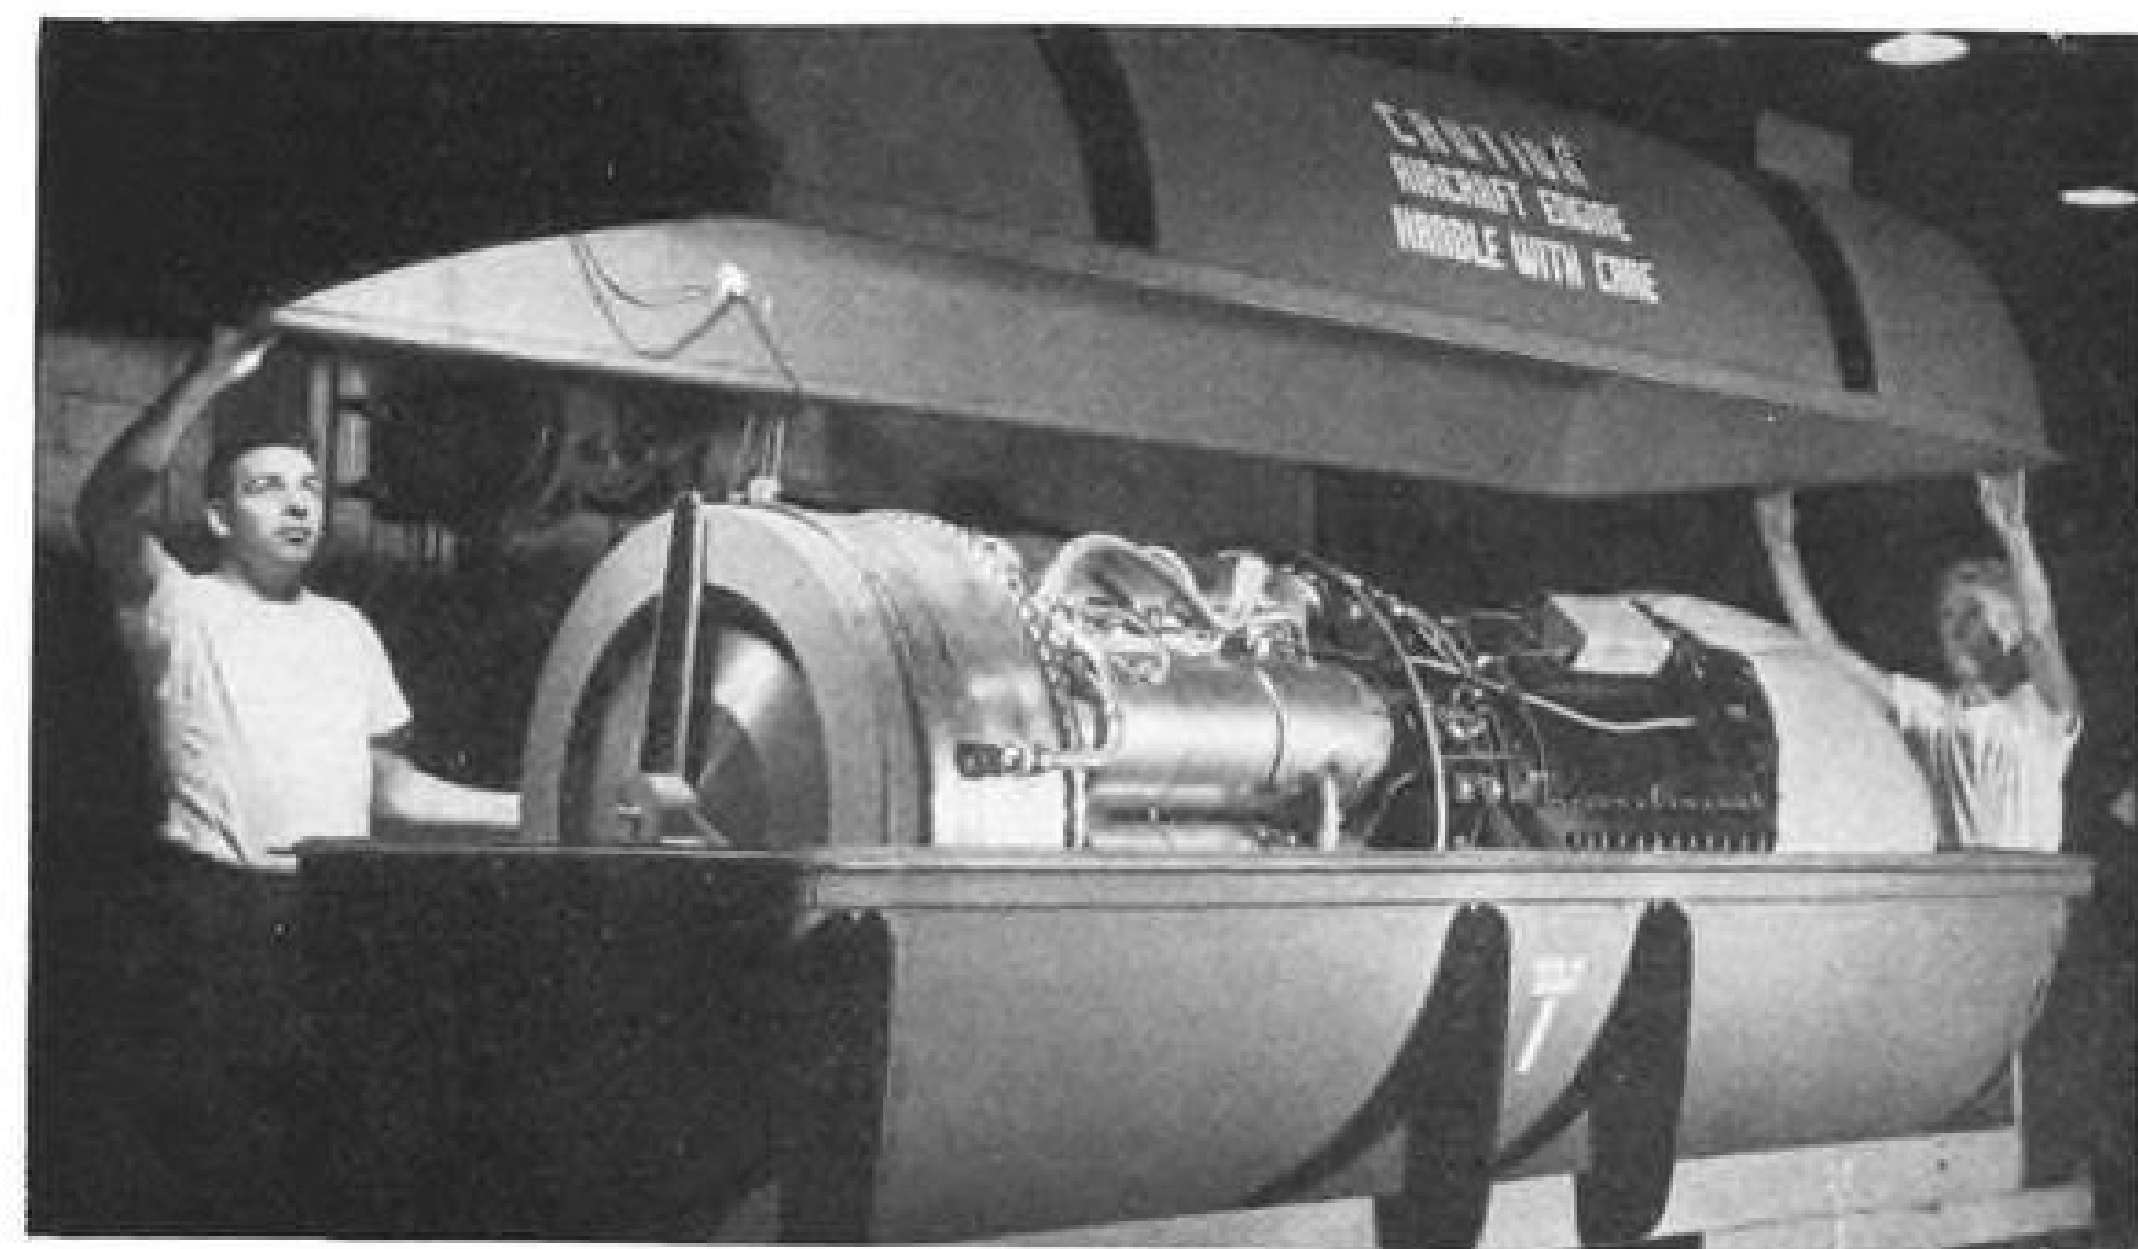


SHIPPING CAN firmly cradles J-47. Unit is non-sinkable, filled with dehydrated air.

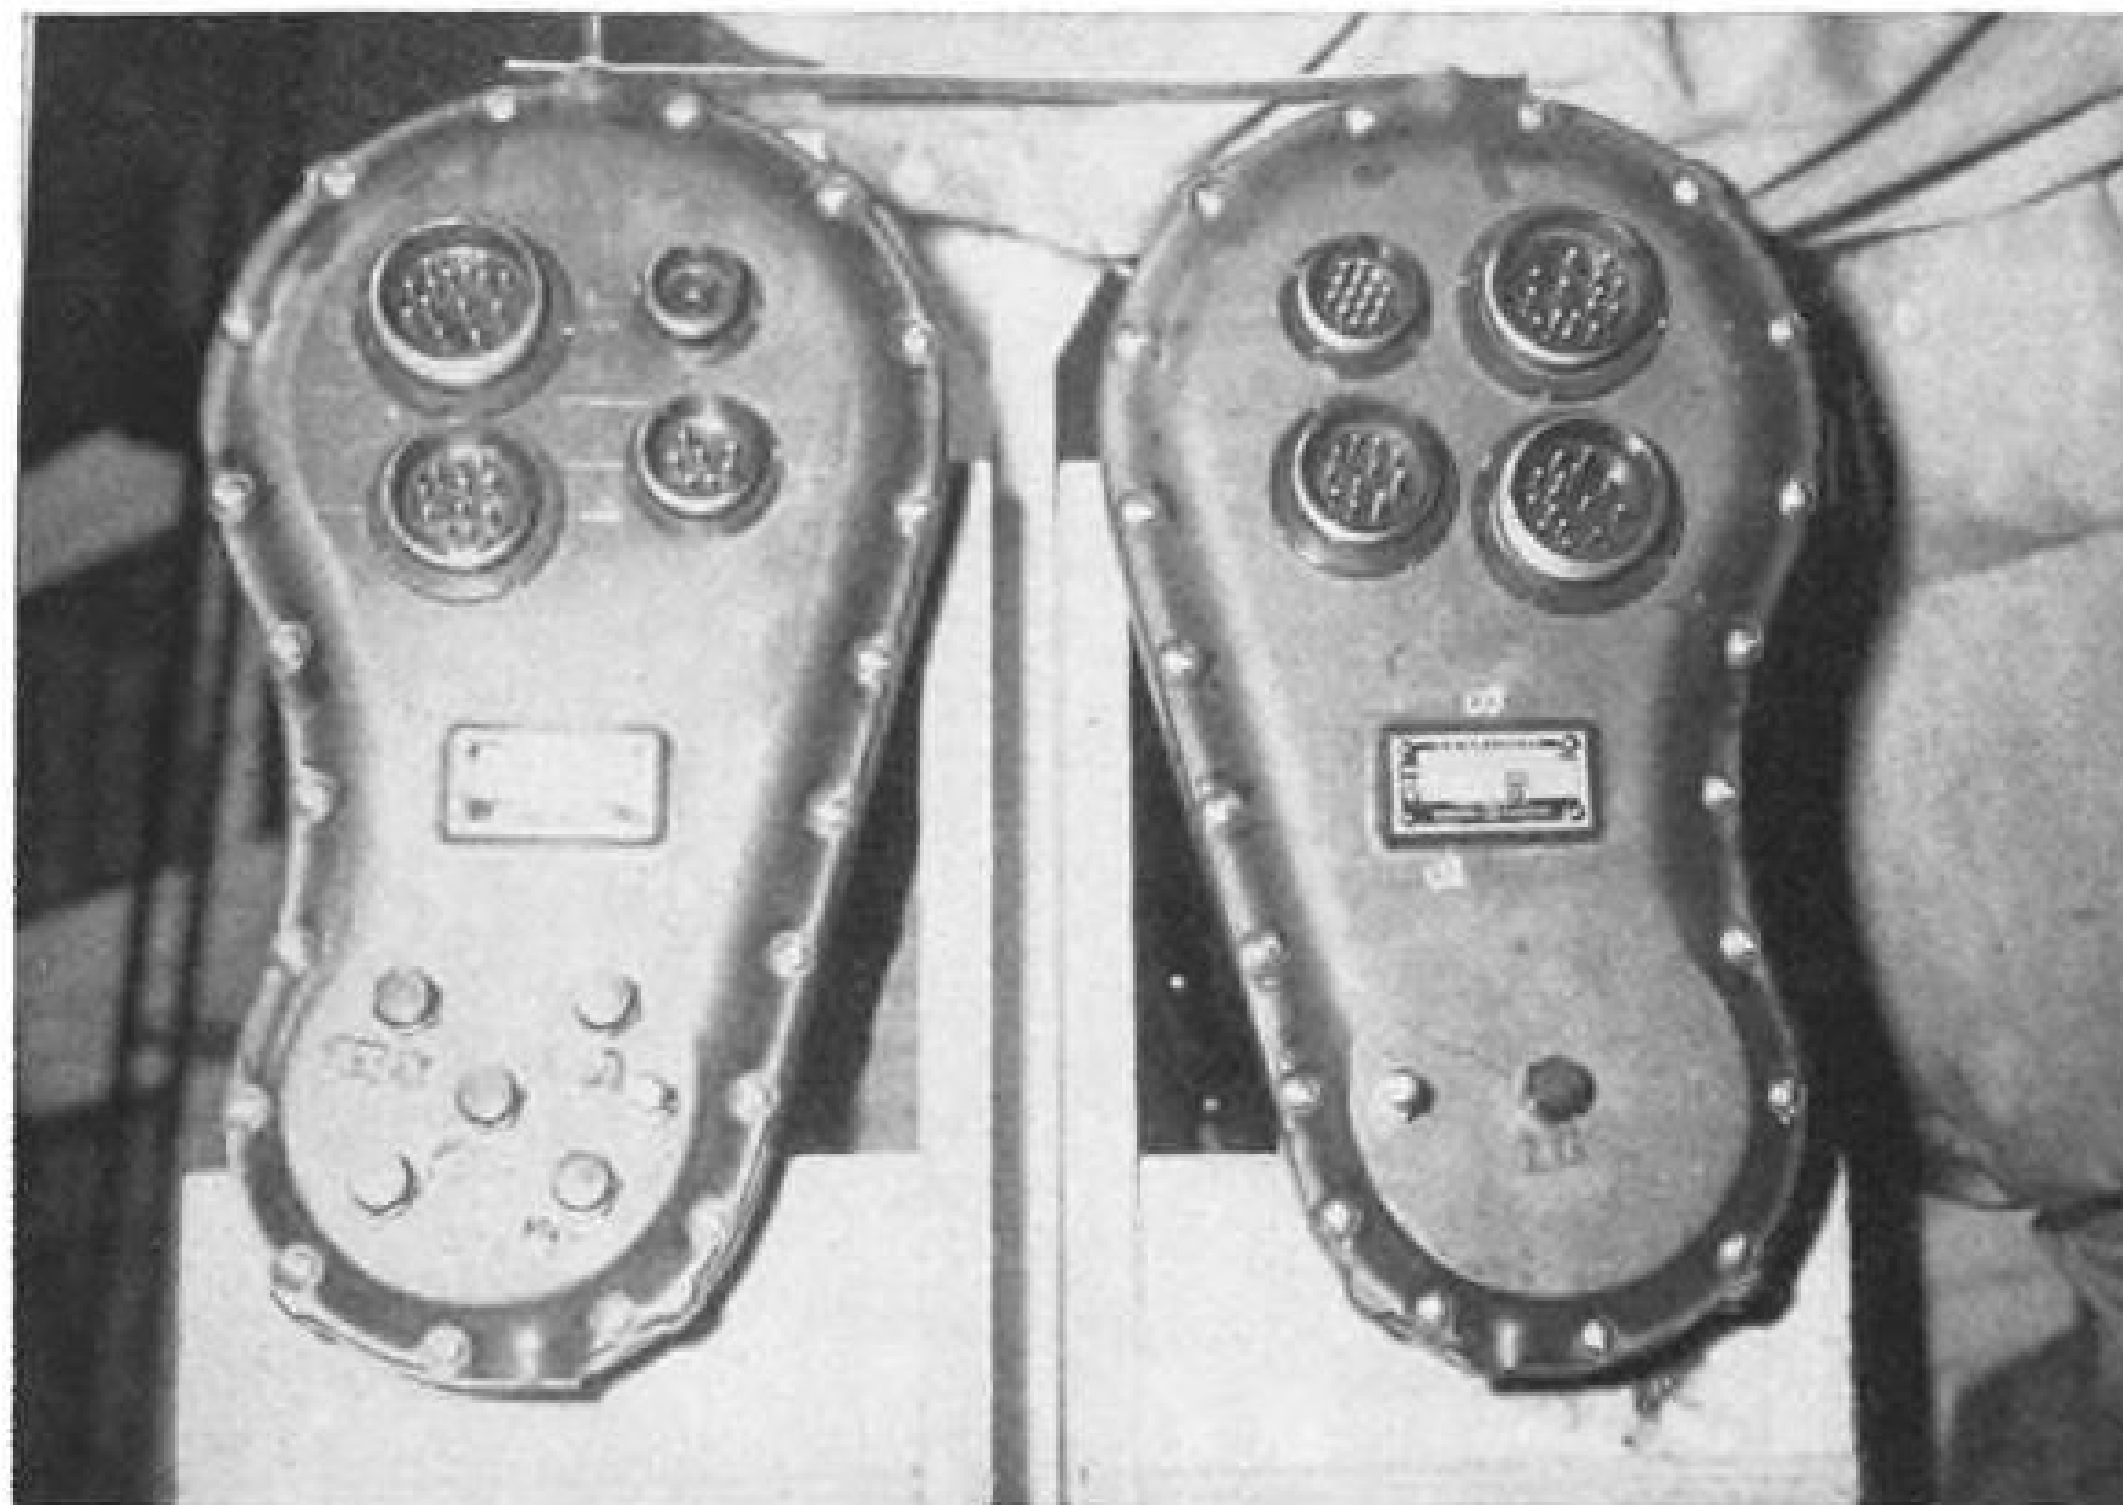

"BRAIN BOXES" on -17 jet control maximum permissible limits of temperature, fuel flow and acceleration that can be handled without damage to engine or aircraft structure.

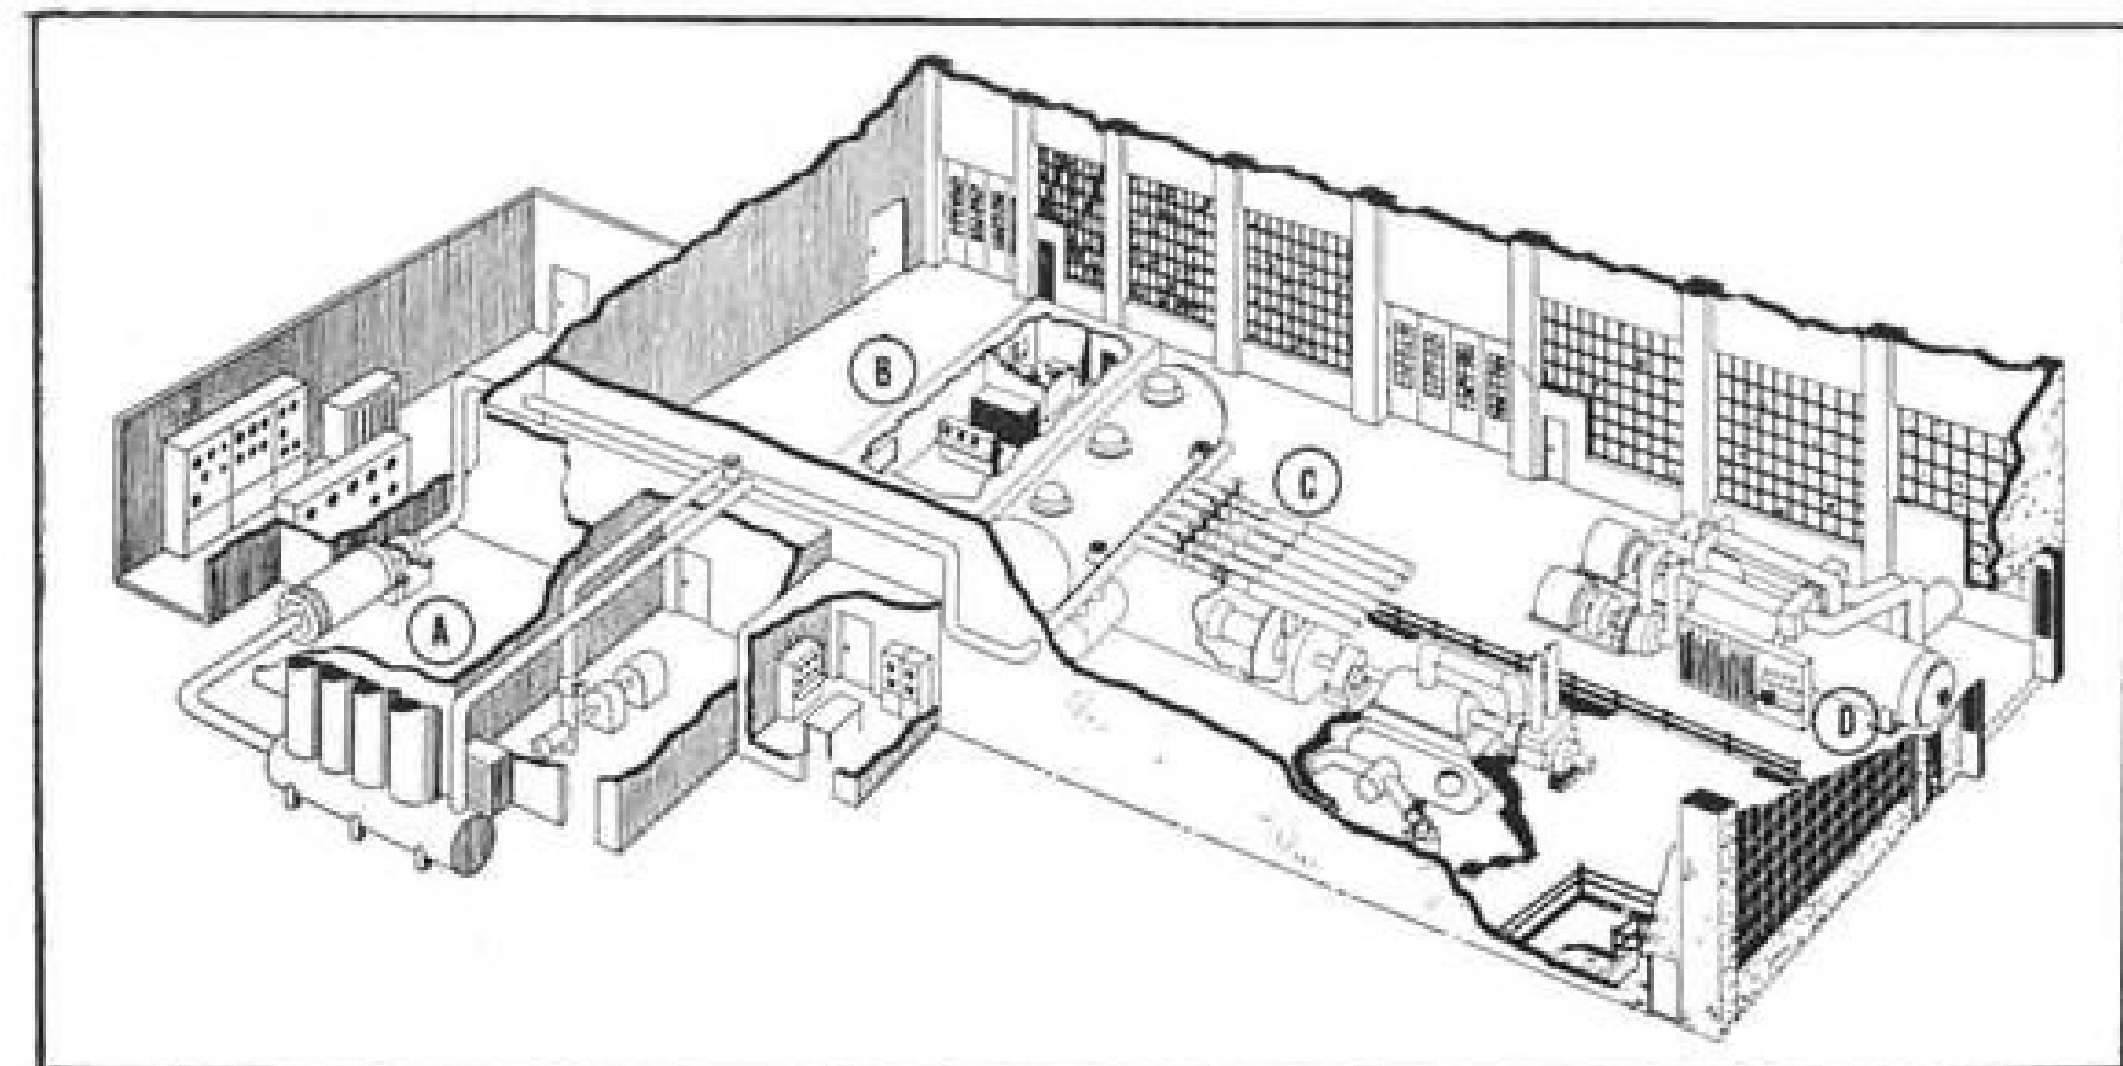

NEW LAB for jet components: A, combustion test stand; B, main control room; C, full-scale compressor stand; D, scale-model stand. Facility will simulate 70,000-ft. height.

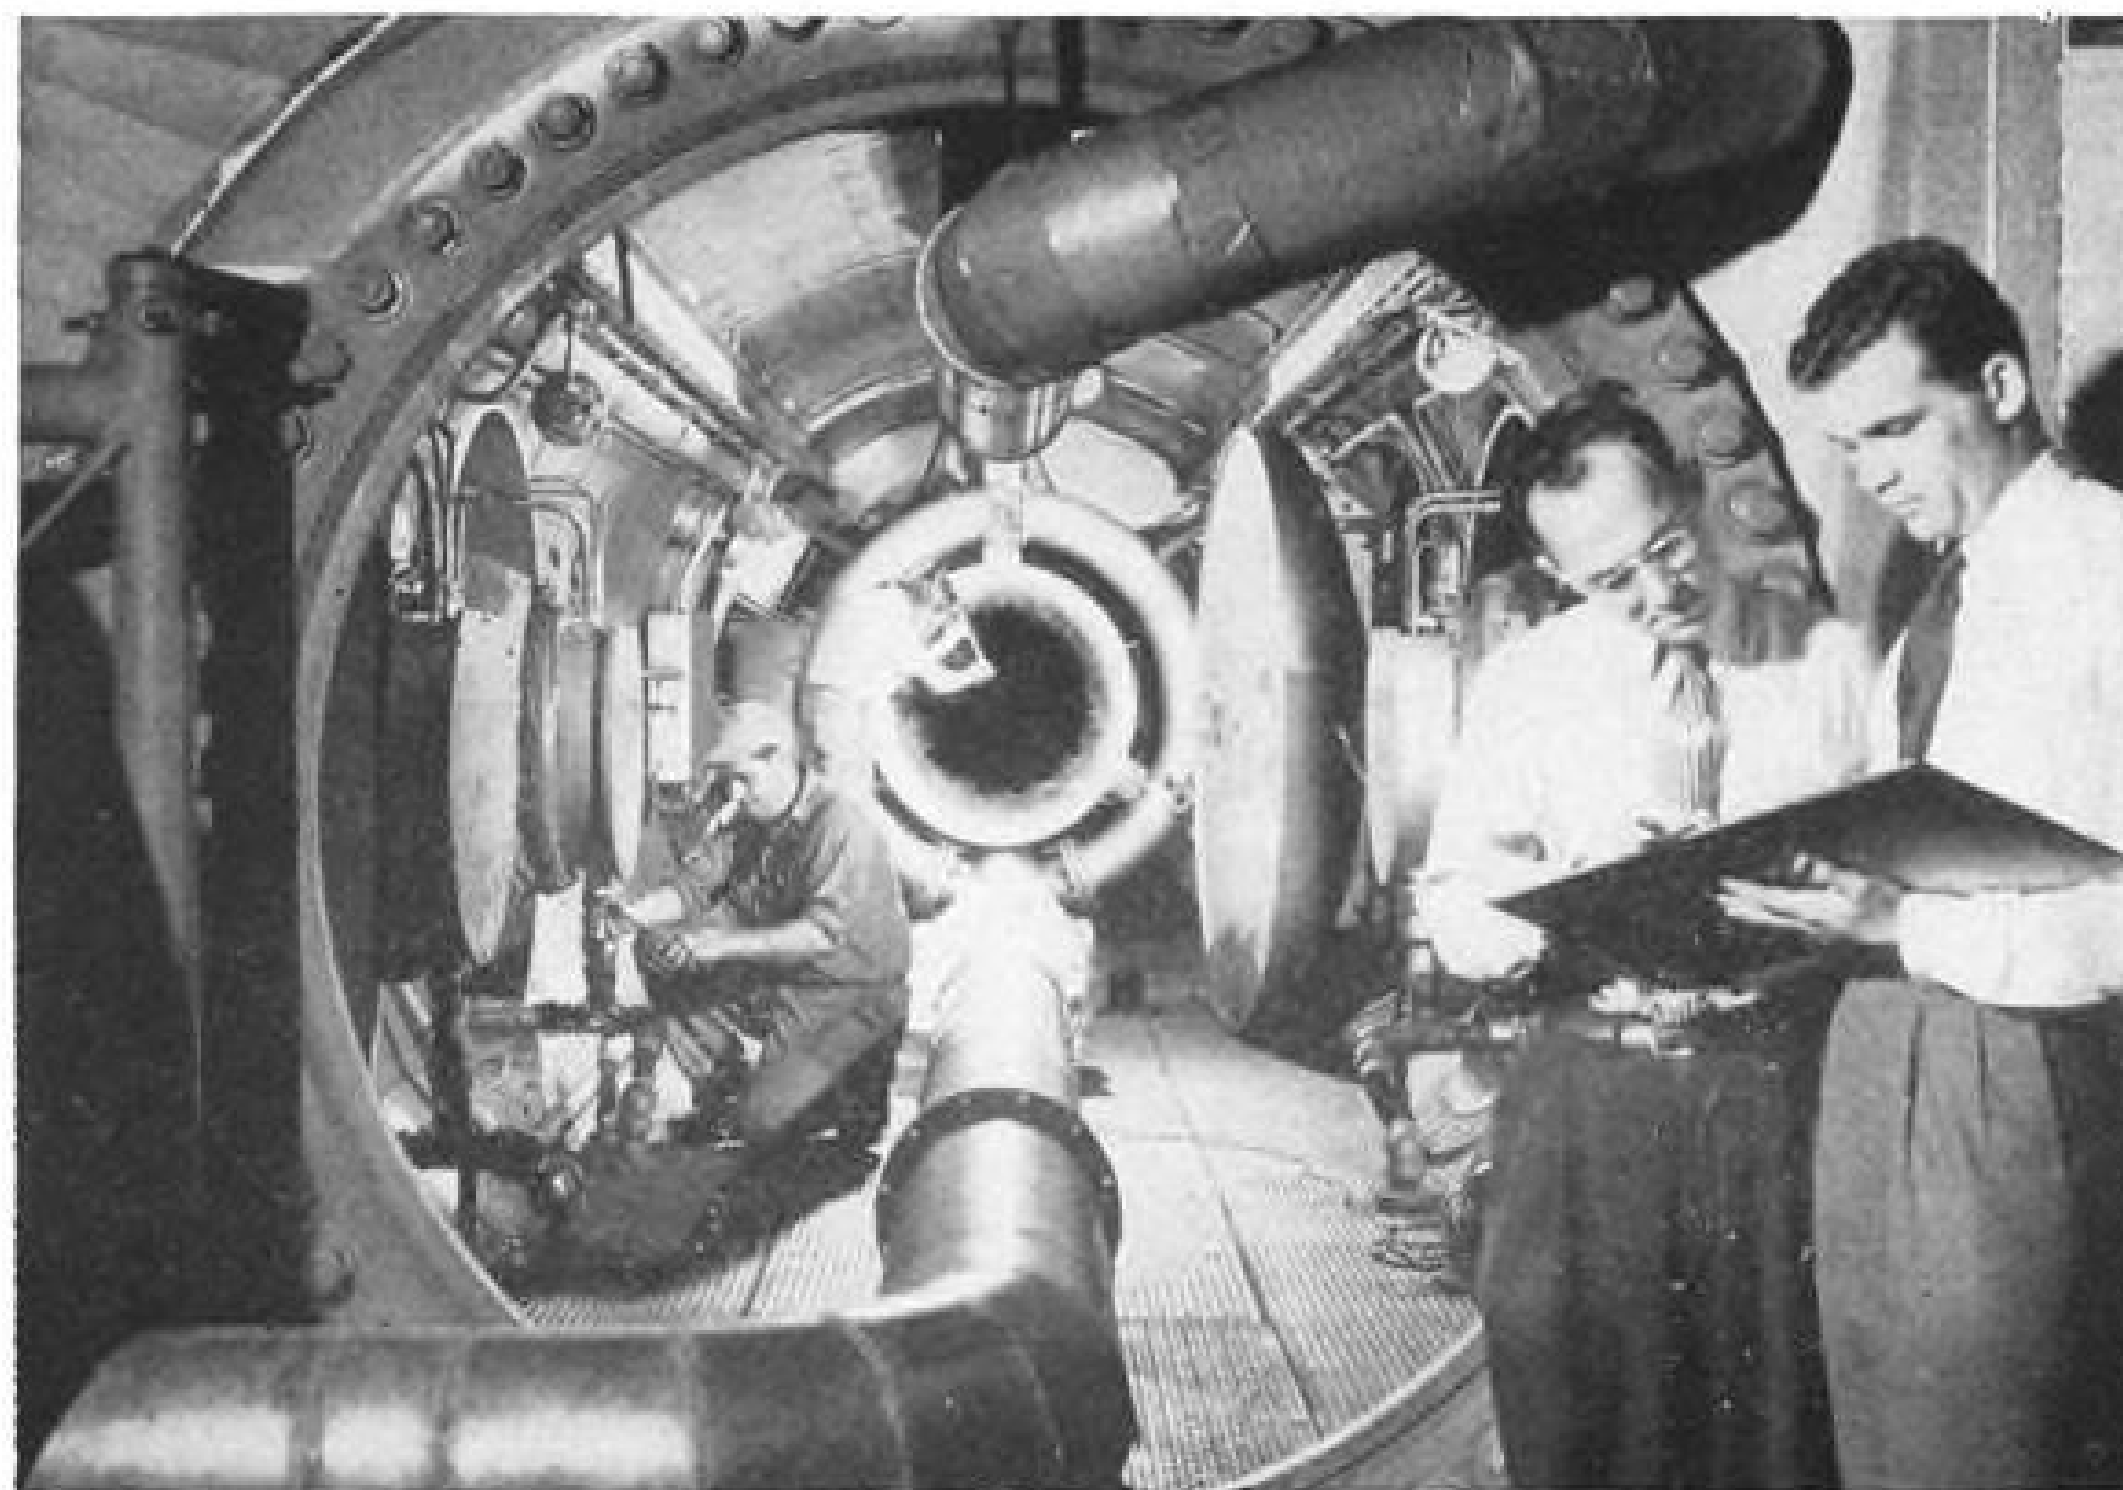

TEST CHAMBER for experimental compressor (blacked out, in rear center). Steel chamber has 10-ft. diameter, is about 40 ft. long. Facility has run about 300 hr. to date.

• The J-47-GE-23 is an unaugmented engine, also incorporating the anti-icing features and high-altitude starting system.

Thrust ratings for the -17 and the -23 have been announced as "in excess of 5200 lb." While GE officials will not confirm a specific higher thrust figure, it is believed that the thrust value of the -17 with afterburner should be 7500-8000 lb.; for the unaugmented -23, 6300-6500 lb.

► **Slant on Sapphire**—Considering the pace of jet engine development in the U. S. and England, it is obvious that the company hasn't frozen its efforts by limiting progress to just improvement of the J-47.

And the power recently announced for the British Armstrong-Siddeley Sapphire (7200 lb. thrust) doesn't seem to cause any concern among GE technicians, even though their company's "in excess of 5200 lb." thrust statement admits, by implication, of a substantial gap between J-47 power and that of the British jet.

GE has been approached on the proposition of manufacturing British engines, it is reported, but nothing has come of it. GE technicians say there is no need for the company to build under license a higher power British jet engine because they feel they have better stuff coming up.

They also feel that their new turbine testing lab gives an advantage that marks the turning point in forging ahead of the British, who, they say, have to get their data mainly through flight tests, since they have no such extensive ground-test facilities.

► **New One?**—These opinions, coupled with the apparent lesser thrust value of the J-47, can only give rise to the inference that GE is developing another engine, which from the dimmest view will have a thrust at least equal to, or from a favorable view will be considerably higher than the Sapphire's.

While company officials will not confirm the existence of a specific project, the designation "J-53" generally has been attributed to a new GE jet development.

► **How Much Thrust?**—What will be this engine's power potential?

It is logical that the company won't come out with a new design that will just about match the Sapphire's performance, for that would be, in a sense, only "catching up."

It is more likely that the company has set its sights high and will come out with a jet developing power far in excess of anything flying today.

The new engine's power potential probably will exceed 12,000 lb. thrust—with a target value perhaps as high as 15,000 lb.

► **47's New Features**—Data on the company's "all-weather" -17 and -23

DE-ICING CONTROL EQUIPMENT

AS
Versatile
AS THE WEATHER!



Photo courtesy TWA

LOOK FOR THE  MARK OF QUALITY
REG. U.S. PAT. OFF.



A Twist of the Wrist Selects Most Effective Control for Elimination of Any Type and Rate of Ice Formation

With Eclipse-Pioneer de-icing control equipment, the pilot can tailor the de-icing action to whatever conditions he encounters merely by setting the inflation-deflation cycle for light, moderate or heavy icing—or for high altitude. Furthermore, should the situation demand it, he can operate a single group of De-icer boots without interrupting the normal cycle. The "brain" of this remarkable system, the Eclipse-Pioneer Electronic Timer, has been engineered for controlled cycling of inflation and deflation of all

B. F. Goodrich De-icer boots including medium and high pressure types. In addition to the Electronic Timer, Eclipse-Pioneer produces the components for making up a complete de-icing timing system, including: the Suction Regulating Valve, Engine-driven Air Pump, Air Check Valve, Air Pressure Relief Valve, Air Distributing Valve, Primary Oil Separator, and a combination Oil Separator and Pressure Regulating Valve. For further information write to:


ECLIPSE-PIONEER DIVISION OF



PETERBORO, NEW JERSEY

Export Sales: Bendix International Division, 72 Fifth Avenue, New York 11, N. Y.

Engine Control Equipment • Air Pumps • Engine Starting Equipment • Hydraulic Equipment • Ice Elimination Equipment • Power Supply Generating Equipment • Power Supply Regulating Equipment • Flight Instruments • Automatic Pilots • Flight Path Control Systems • Engine Instruments • Navigation Instruments

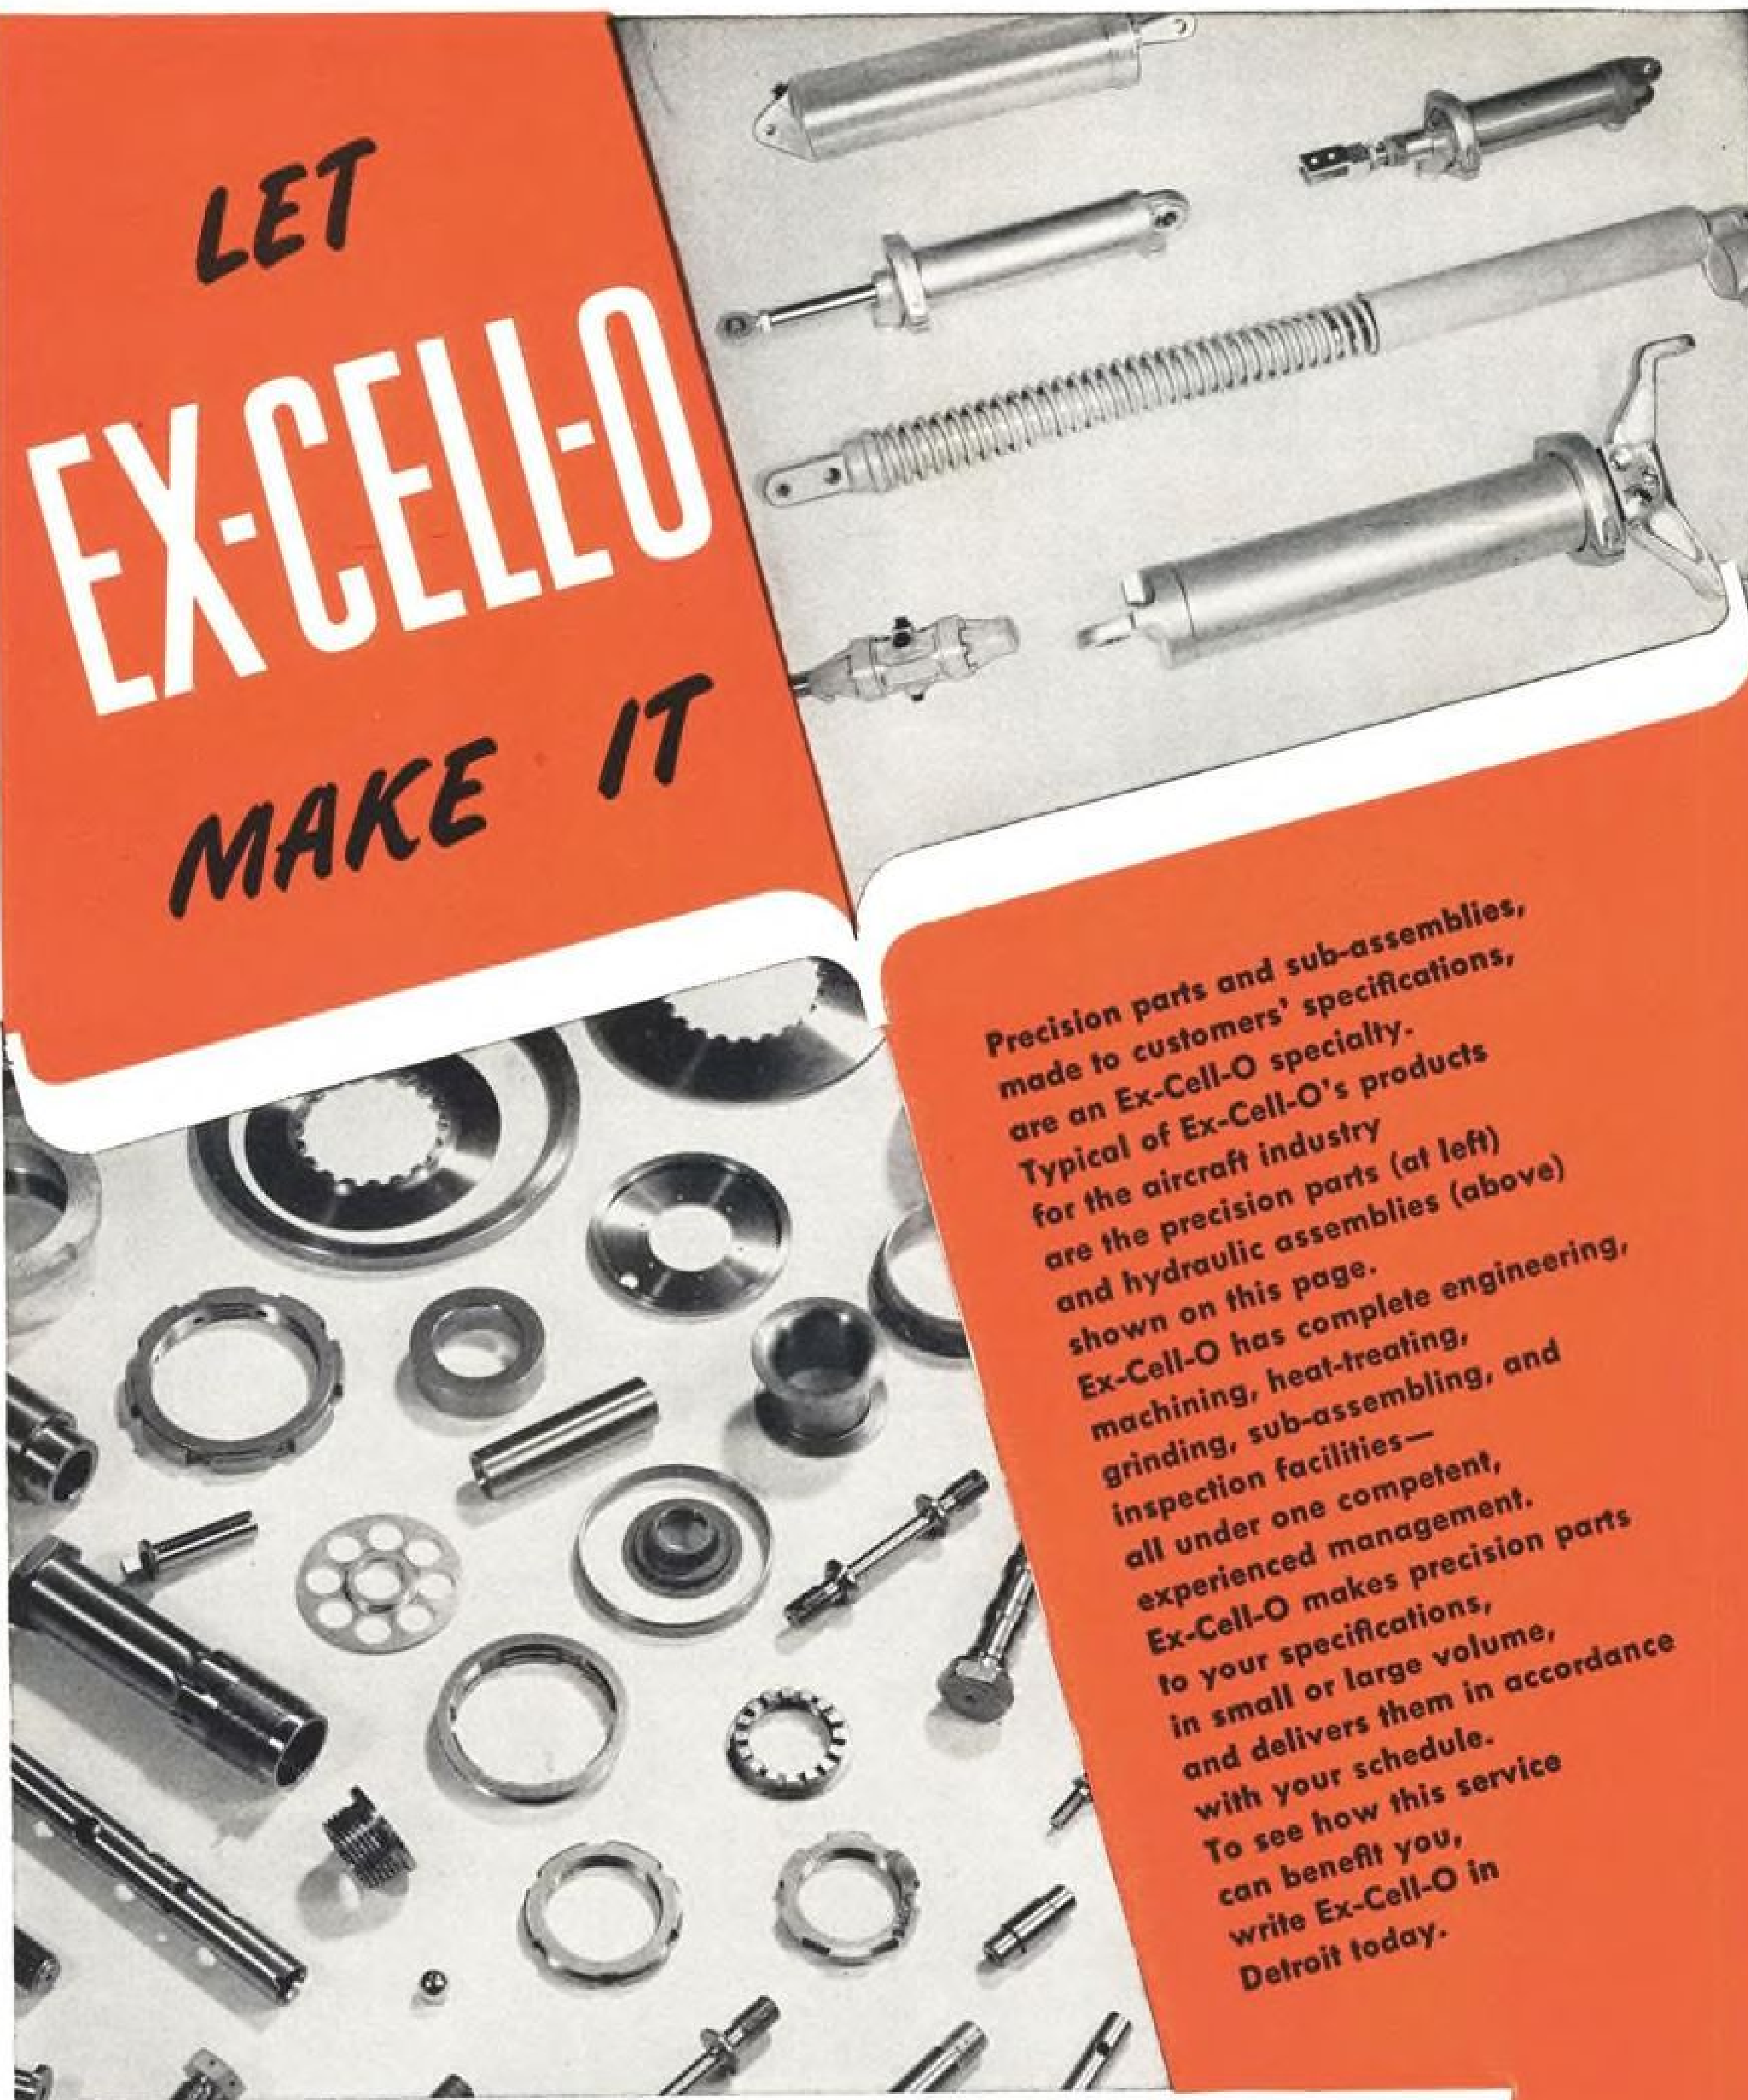

**LET
EX-CELL-O
MAKE IT**

Precision parts and sub-assemblies, made to customers' specifications, are an Ex-Cell-O specialty. Typical of Ex-Cell-O's products for the aircraft industry are the precision parts (at left) and hydraulic assemblies (above) shown on this page. Ex-Cell-O has complete engineering, machining, heat-treating, grinding, sub-assembling, and inspection facilities—all under one competent, experienced management. Ex-Cell-O makes precision parts to your specifications, in small or large volume, and delivers them in accordance with your schedule. To see how this service can benefit you, write Ex-Cell-O in Detroit today.

EX-CELL-O CORPORATION D E T R O I T . . . 3 2

Special Multiple Way-Type Precision Boring Machines • Special Multiple Precision Drilling Machines • Precision Boring, Turning, and Facing Machines and Fixtures • Precision Cylinder Boring Machines • Precision Thread Grinding Machines • Precision Lapping Machines • Precision Broach Sharpening Machines • Other Special Purpose Machines • Tool Grinders • Continental Cutting Tools • Broaches and Broach Fixtures • Counterbore Sets • Grinding Spindles • Hydraulic Power Units • Drill Jig Bushings • R. R. Pins and Bushings • Fuel Injection Equipment • Dairy Equipment • Aircraft and Miscellaneous Production Parts



49-6

engines were revealed during a two-day press tour of the Lynn and Everett facilities.

The J-47-GE-17 is slated to power North American's F-86D. This afterburner-fitted powerplant will incorporate:

- More efficient compressor having greater air flow.
- High-altitude (50,000 ft.) starting system similar to that already on the -19 pod jets used on the B-36.

The scheme provides for two spark-plugs instead of one per chamber, thus doubling the ignition energy for the two cans that are fired.

And the cross-fire tubes to the other six cans have been increased in size (over those on the -11 production engine) so that they now have about three times the cross-sectional area. Also there are changes in the fuel system to give better control.

• An anti-icing system to permit operation under severe weather conditions. Hot air from the eighth stage of the engine's compressor is bled to feed hollow nose installations—inlet guide vanes, fairings and support struts—temperature being sufficiently high to melt icing accretions.

Because this air, in the production J-47, has been used to balance the forward thrust on the rotor (to avoid use of a large thrust bearing) no further thrust loss was involved in harnessing it for anti-icing.

• An air inlet screen to exclude debris during ground operation, which is retracted soon after takeoff so that it cannot act as a framework for an ice dam or cut down on the air flow into the compressor. Plans are under consideration to key the extension and retraction of the screen with that of the landing gear.

• New integrated electronic fuel and jet nozzle control system. This consists of a single lever for engine control, sensors for translating temperature, speed and related data into electrical readings, and two kidney-shaped electronic computers—brain boxes—located in the aircraft forward of the powerplant to avoid complication of the engine installation.

► **How Control Works**—The computers compare power needs, as indicated by the throttle, against the engine's performance, and correct any deviations between the two conditions by changing the fuel valve settings to control engine speeds or adjusting the variable-area tailpipe nozzle to control exhaust velocity or temperature.

This is done by amplifiers stepping up the small currents to power levels to actuate electric motors.

The brain boxes control the maximum permissible limits of temperature, fuel flows and acceleration which the engine can handle without damaging

itself or the aircraft structure. And the pilot can do nothing to make the computers exceed these limits.

The new thermocouple sensing unit is designed for high response and long life.

► **Benefits**—Here are the advantages claimed for the electronic control:

• **Influence of the human element** and consequent errors are minimized.

• **At takeoff**, the pilot just sets his throttle, eliminating the need for nursing it or keeping a close check on temperature gages, because the electronic system has taken over.

• **Engine life** will be increased because excessive temperatures or fuel flows are prevented.

• **Maximum performance** is maintained, the sensors picking up slight changes in temperature, altitude, etc., and fuel flow being adjusted to cope with the new conditions.

• **Control** of the basic engine and afterburner is integrated, with fuel and nozzle adjustments made that could not be done by the pilot with high efficiency.

• **A factor of safety** is provided, so that if any part of the control system is damaged, as from shell fire, the power setting at time of failure is maintained until an emergency hydraulic control system is cut in to take over.

► **Old vs. New**—GE engineers stress the efficiency of the electronic system by comparing it with the attention required for a current afterburner-equipped jet with combination hydraulic and manual control, where pilot starts the basic engine, closely checks instruments and throttles back if temperature goes high enough to threaten turbine wheel damage. And to prevent engine stall, the afterburner cannot be cut in until the basic engine is up to speed.

With the new system, pilot presses the starter and immediately can push the throttle to full power with afterburner, the controls bringing the engine up to speed and cutting in the afterburner automatically.

► **Strategic Materials Cut**—Incorporation of less critical materials in the -17 has followed intensive testing and evaluation. At present, the strategic metal content of the engine has been reduced about one-third, and GE officials feel that a two-thirds reduction can be attained.

While no sacrifice in engine life or performance is anticipated as a result of the materials substitution, no conclusive data will be available until the engine has finished many hundreds of operational hours.

With the J-47-GE-23, emphasis was placed on getting started on production of the anti-iced engine. And though the -23 does not now have strategic material reductions comparable to the

Extra Value
ANY WAY YOU MEASURE IT

DARNELL
CASTERS & WHEELS

give you more
for your money



Maintain maximum employee efficiency—equip your hand trucks and other movable equipment with DARNELL Casters and Wheels—SAVE MONEY and eliminate that mid-afternoon "bogging down" of production.

Free!

DARNELL
MANUAL

DARNELL CORP. LTD.
LONG BEACH 4, CALIFORNIA

60 WALKER ST. NEW YORK 13, N. Y.
36 N. CLINTON CHICAGO 6, ILL.

Headquarters



AIRWORK AT MILLVILLE



... for "off-the-shelf" shipments within 24 hours! Airwork maintains complete inventories of factory-new parts and accessories to give you prompt shipment—whatever your order, *large or small*. And our staff of sales engineers are especially trained to screen orders and advise on engine modifications, parts interchangeability, and power plant problems—your insurance against superseded parts... obsolescent parts... overstocking.

In addition, Airwork's exceptional production-line overhaul facilities for Pratt & Whitney and Continental E-185 engines assure you the same high quality work that has enabled airline operators to get time extensions of as much as 55% on operating time allowed by CAA between overhauls!

That's why you should send it to Airwork—headquarters for overhauls—accessories—spare parts.



Airwork Corporation distributes the following aviation products: American Brass, Bendix Products Division, BG, Champion, Continental, Jack & Heintz, Packard Cable, Pesco, Pratt & Whitney, Romec Pumps, Thompson Products, Titeflex, Turco Products, and U. S. Rubber.

ONE OF THE FOUR



PRATT & WHITNEY DISTRIBUTORS

Airwork
CORPORATION
MILLVILLE, NEW JERSEY
NEW YORK • MIAMI • WASHINGTON

-17, substitutions are scheduled as production proceeds.

► **Titanium Tried**—GE has not overlooked the advantages of using titanium, a metal whose potential looms large on the aircraft horizon.

The company is already released to use titanium for sheet metal brackets and clips, but has not found the material to be sufficiently available. And high cost is still a hurdle.

But it has evaluated titanium experimentally in compressor blades and wheels and its engineers say that the metal has stood up exceptionally well.

► **Lab Details**—The new 30,000-sq. ft. aircraft gas turbine laboratory—dedicated to the late Dr. Sanford A. Moss, creator of the turbosupercharger—went into operation about the first of this year.

The facility was designed to test components, rather than complete engines, because it was felt that more fundamental design information could be obtained and in much less time.

Compressor research is being pushed because this component is believed to be the key factor in achieving higher powers.

GE engineers say that the lab is intended to test components having large airflows at higher pressure ratios and over higher temperature ranges than previously possible in this country.

The lab facilities were set up to satisfy these conditions:

- All test variables such as temperature, pressure and speed should be measurable with a precision to give a probable error in overall performance data not exceeding ± 1 percent.

- Use of the lab for testing at high power levels should not significantly diminish the equipment's utility when used with small or intermediate component sizes.

- Avoidance of long delay from mechanical failure of test parts.

► **Requirements**—Power is supplied by a 35,000-hp. steam turbine plant which can drive compressors capable of pushing out air flows of 320 lb. per sec. The plant consumes 255,000 lb. of superheated steam per hour.

More than 14 million cu. ft. of air per hour can be brought to -70 F. by a cooling cycle using water from the Saugus River and four sets of refrigeration compressors and turbines. In full operation, the lab needs 4.8 million gal. of water per hour.

► **Compressor Stand**—To date, this facility has chalked up more than 300 hr. of running time. It is a 10-ft.-diam. steel tank about 40 ft. long, insulated on the compressor inlet side with eight layers of aluminum sheeting. The discharge section is insulated externally with glass wool.

The stand operates either open or

closed cycle, but thus far it has been used on the former scheme because data were desired in a hurry and the closed cycle was more difficult to set up quickly. The closed cycle will soon be put into operation.

Altitudes of 70,000 ft. will be simulated, temperatures attained down to -100 F.

More than 700 readings of temperature, air flow, pressure, torque, blade strain, vibration and blade clearance are made during a compressor test.

For clearance measurements, a GE-designed device—Clearanceometer—employing a small contact "flag" is used to indicate the space between the compressor case and rotor blade tips before, during and after tests.

► **Control Room**—Coordination is through a test foreman, 18 test operators and data recorders and ten equipment men. Main floor and basement operators are directed through intercom.

Half-hour readings of temperatures and pressures are fed to a central recording station so that there is no delay in interpreting data and to avoid the necessity for re-runs days later when the particular equipment may be inoperative.

Warning signals guard against maintaining over- or under-limit pressures and temperatures.

► **Combustion Setup**—This test facility accommodates complete combustion assemblies operating over a pressure range from sea level to 250 psi. The installation can burn fuel at rate of 50,000 lb. per hour.

Combustion (and compressor) exhaust is cooled by water spray to below 400 F. before it is ducted to externally located silencers.

► **Instrument Highlights**—GE's Aircraft Instrument division is housed in a new 100,000-sq. ft. plant which became fully operational about two months ago. It provides hot, cold, and humidity rooms for checking instruments under various climatic conditions encompassing a temperature range from -60 to 180 C.

The division is constantly working to improve designs and bring out new designs to cope with the fast rate of aircraft instrument obsolescence.

Another problem is to design for growing reduction in cockpit panel size, hence the trend is toward smaller and smaller indicators. For example, pointers for new-type indicators are but $\frac{1}{4}$ in. long and $\frac{1}{40}$ in. in diameter.


Despite the small size of the new instruments, production is conducted on a mass basis.

And supplementing the trend to smaller instruments is the increased emphasis being placed on automatic control devices to minimize pilot attention.

Here's why those in the know

—demand

CANNON PLUGS

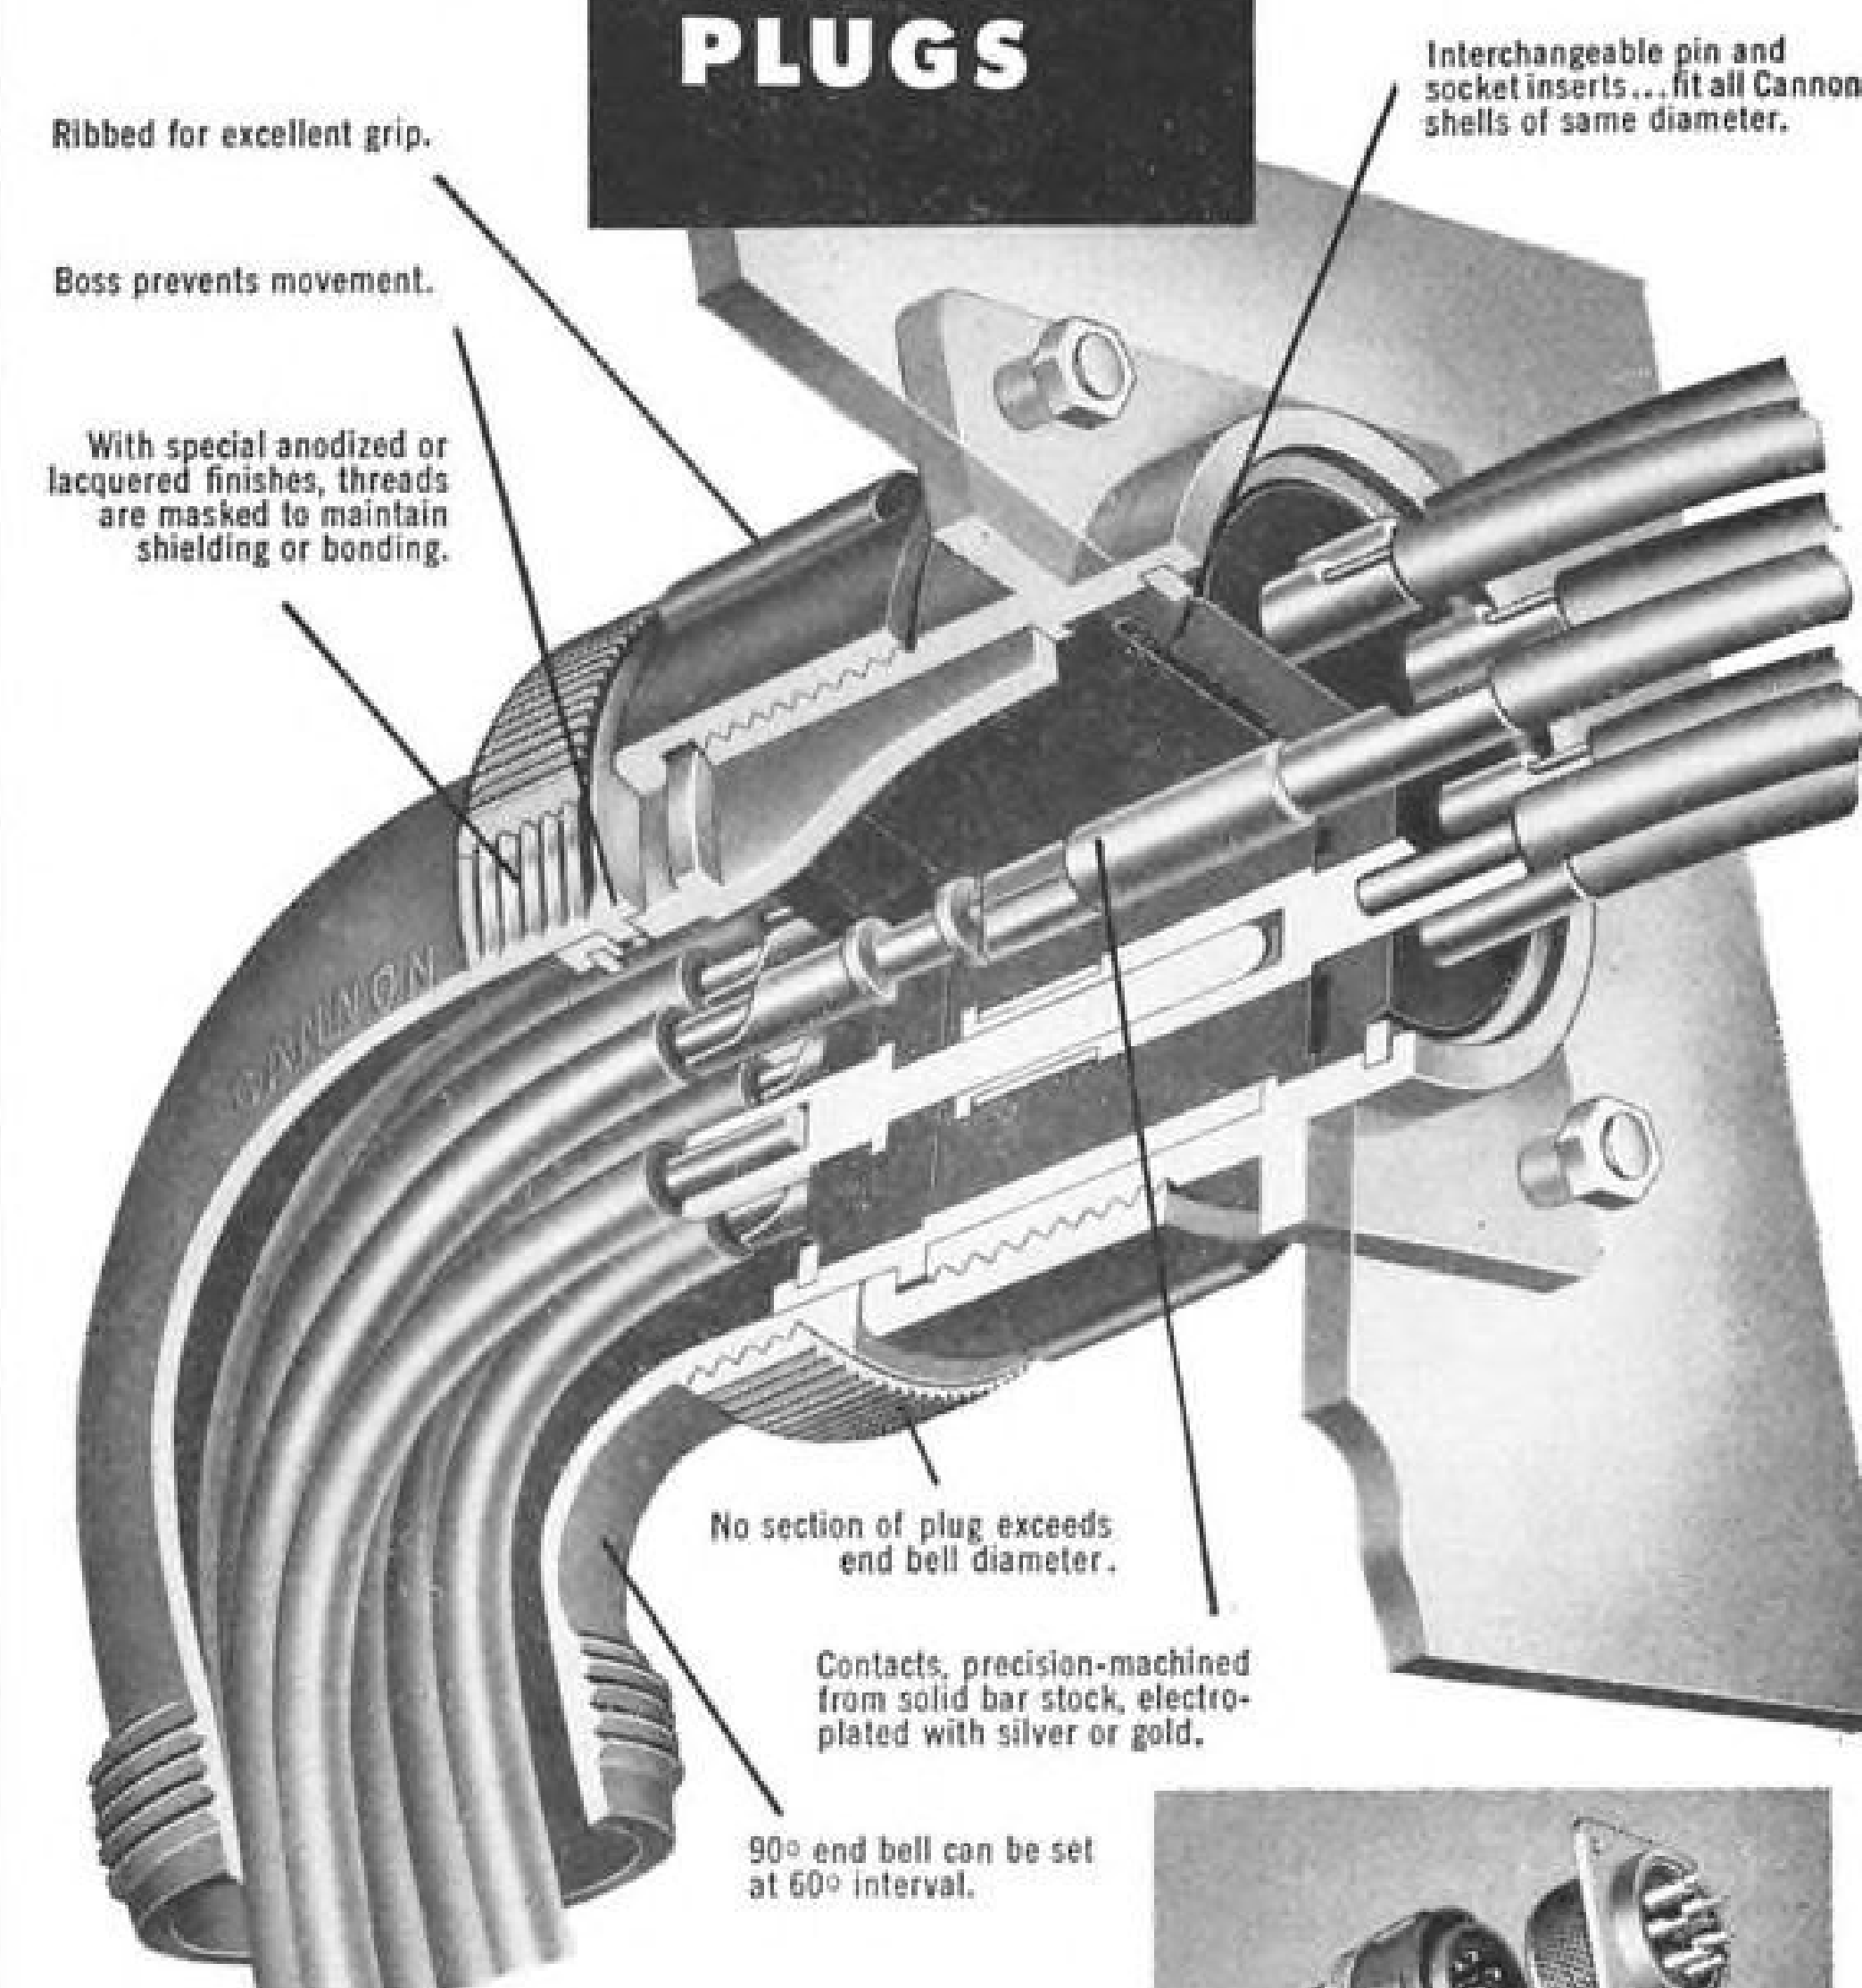

Type AN Connectors are made in 6 styles; straight and 90° cord plugs; box, wall, and extension cord receptacles; and special quick disconnect plugs. Fifteen diameters for inserts with contact arrangements from single to 100 contacts. Contact capacities from 5 to 200 amps. Peak voltages from 70 to 9,000 volts.



Cannon
split-shell
design
advantages


no assembly tools needed
end bells are interchangeable
no slack in lines
test without disengaging plug
easy inspection and circuit changes

See that your circuit requirements are met. See that all control, communication and power circuits have firm positive contact, low dielectric loss... and see that each circuit is protected by the design advantages found only in Cannon Plugs. AN Connector Series is just one of the many Cannon types—world's most complete line. Request bulletins by required type or describe the connector service you need.

CANNON ELECTRIC

Since 1915

LOS ANGELES 31, CALIFORNIA
REPRESENTATIVES IN PRINCIPAL CITIES

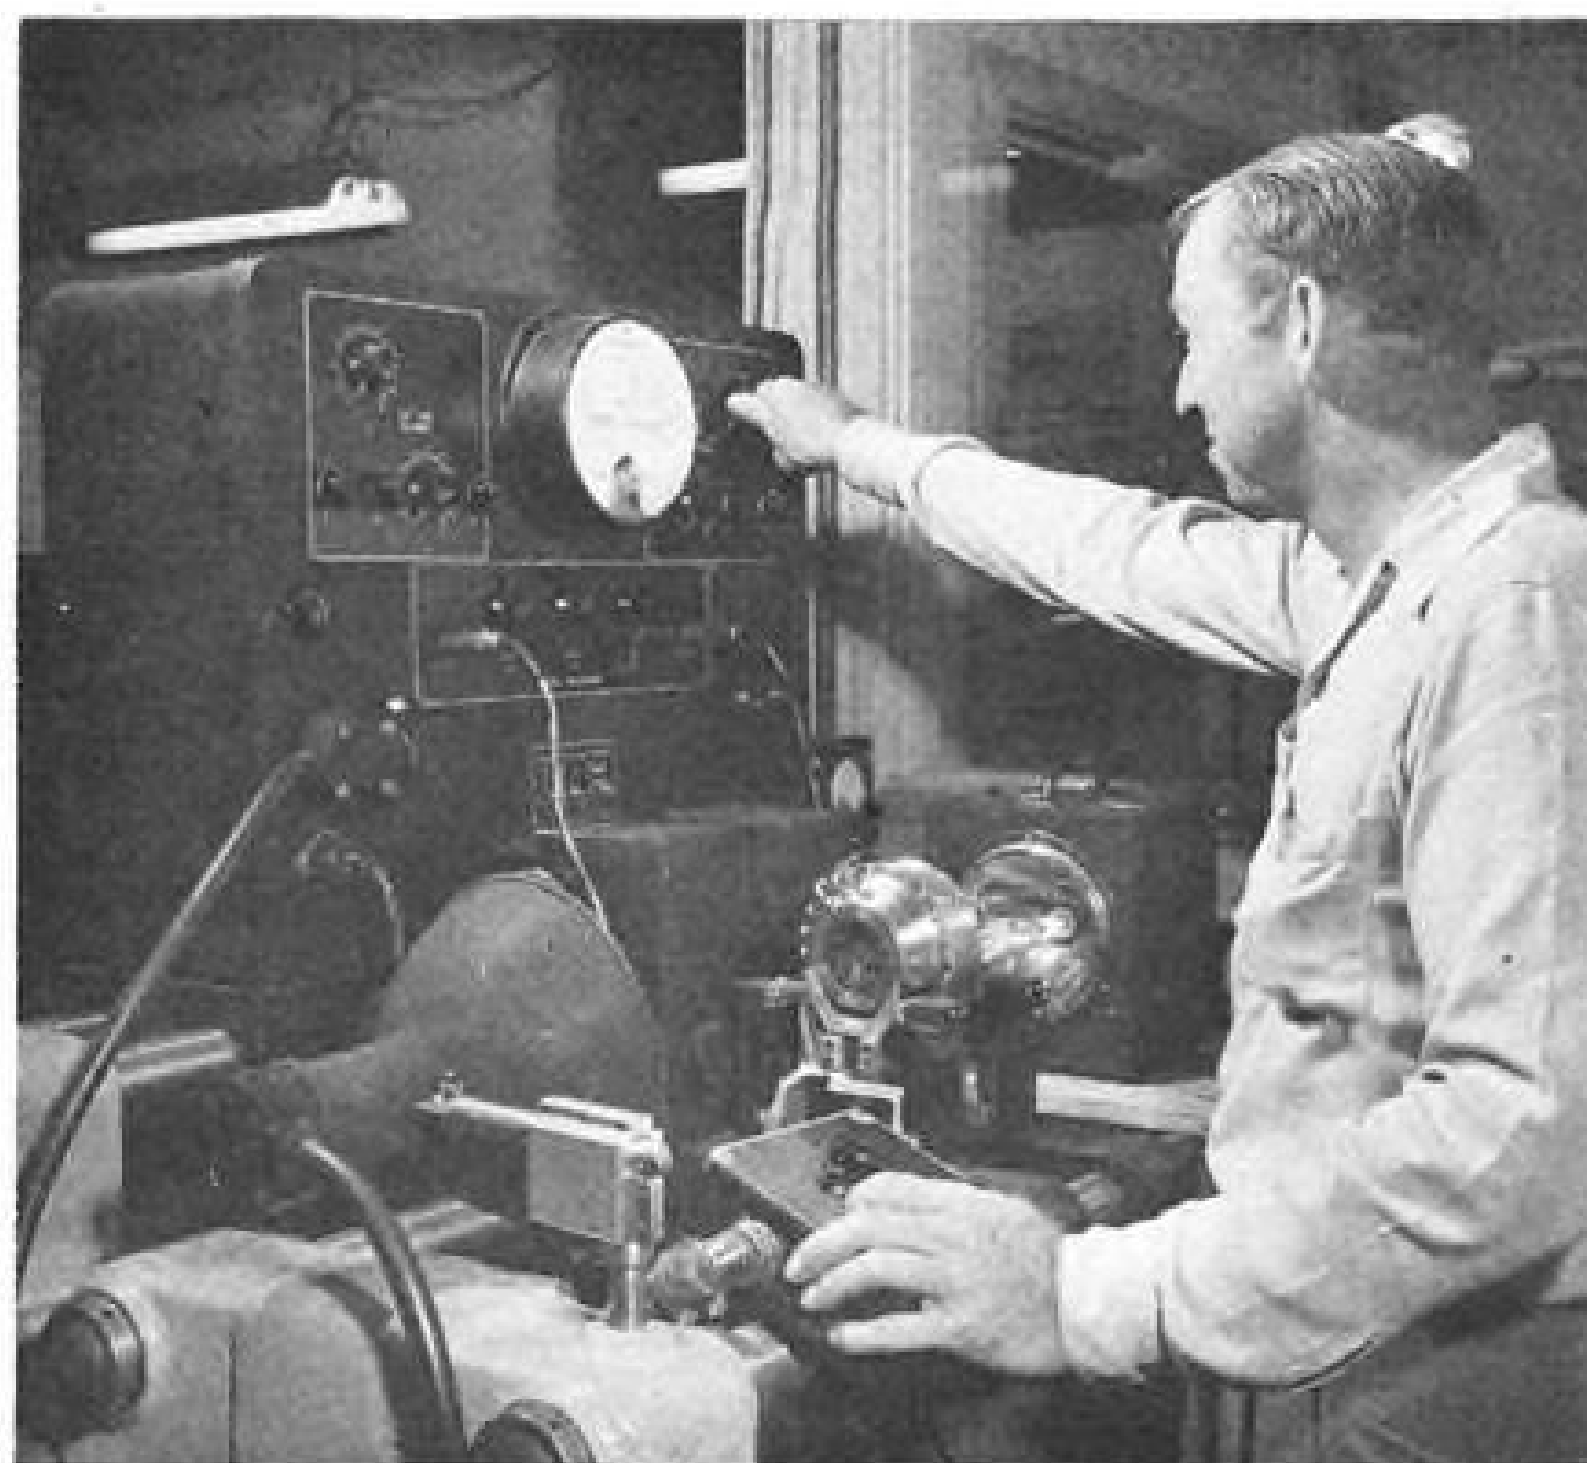

DYNAMIC BALANCING of air bearing gyro components is carried out in the dust-free rooms of North American's precision machine shop.

Air Bearing Gyro for Missile Guidance

Pickle-barrel accuracy envisioned through air film lubrication that reduces friction to nearly zero.

Some mighty fine airplanes have been produced by North American Aviation, Inc.—but as yet they haven't produced a perpetual motion machine. They have done the next best thing, though, with one of their latest devices, an air bearing gyro.

Give such a gyro a little spin with your fingers, and walk away. If you come back after several hours, the rotor will still be spinning. And if you go away and come back two hours later, it will still be spinning—turning on air, the closest thing to a frictionless bearing.

Right now, these gyros form the stable heart of a missile guidance and control system under development by North American.

► **Accuracy Necessary**—Any missile control system is an automatic navigational aid—an autopilot, if you will—which

has to be extremely accurate. The system must be able to spot the missile's position with respect to a set of reference axes.

The center of the earth is a convenient origin for a set of axes which define the aircraft's position in space. To detect the earth's center, a true vertical must be established. A "plumb bob" has to be dropped from the missile.

The navigational plumb bob is a stable vertical line in space defined by a gyroscope. The vertical is located only as accurately as gyro errors permit.

And the thing that introduces error into the gyro—and that hasn't been eliminated, and never can be—is friction.

► **Air is Best**—But friction can be reduced greatly. Ball bearings are superior to Babbitted ones; fluid suspen-

sion is an improvement; an air bearing is, right now, the best.

In an air bearing, the rotating object is carried on a thin layer of air—say one or two thousandths thick—which acts as the lubricant between the rotor and its bearing.

Thus, the only friction resulting in such a bearing is the viscous friction inherent in the air itself, and that is pretty small.

Starting friction of such a bearing is, to all intents and purposes, zero.

Sounds easy? Well, it's not. Manufacturing an air bearing gyro means drilling holes a few thousandths of an inch in diameter; of balancing a rotor dynamically to a few milligrams; of machining a shaft to a tolerance of a few millionths of an inch.

That's very fussy machine work—and it's expensive. But in exchange, you get a missile guidance system which really means pickle-barrel accuracy when the range is measured in miles instead of yards.

\$650,000 for B-36 Environment Testing

The Fort Worth division of Consolidated Vultee is expanding its engineering test laboratory for aircraft equipment from the present 17,000 sq. ft. to approximately 45,000 sq. ft. of floor space at a cost of \$650,000. The purpose is to set up a complete center equipped with the best scientific apparatus for "environmental testing" of aircraft.

B-36 components and equipment will

be subjected to atmospheric and other physical conditions which the huge strategic bomber is likely to encounter anywhere around the world.

► **Higher Altitudes**—A new and larger altitude chamber is required—one in which altitudes can be simulated up to 80,000 ft. and temperatures brought down to -100 deg. F. Present Convair laboratory provides "altitudes" to 60,000 ft. and temperatures down to -75 deg.

However, B-36s flying at altitudes of some 45,000 ft. have recorded temperatures as low as 100 deg. below zero.

Some equipment, functioning well at

-65 deg., may not work at still lower temperatures. Electrical and electronic equipment requires careful construction and protection to insure troublefree operation under widely fluctuating flight conditions.

► **Weather Machine**—Materials such as fabric and rubber will be tested by a "weather machine" that provides conditions simulating deterioration from sun and moisture. Mildew and fungus attrition can be duplicated.

Other apparatus planned will create swirling dust storms, salt spray and other natural phenomena.

Skyraider

action in Korea
dramatized teamwork
of the armed services


Reports from Korea tell of far-ranging carrier-based *Skyraiders* supporting hard-pressed UN troops as they fought their way through the mountains and plains of that battle-scarred country.

Fleets of Douglas AD *Skyraiders* provided such tactical support with night attacks and by dive-bombing strategic targets.

Thus the Navy teamed up with the Air Force and the Army to achieve success in this tough fight.

The *Skyraider*, like its historic predecessor, the SBD *Dauntless*, has proved its top performance and dependability under all operating conditions. And true to its tradition of building ever finer aircraft, Douglas has already completed the swift, deadly A2D *Skyshark*—world's most advanced turbo-prop attack bomber.

EL SEGUNDO PLANT OF DOUGLAS AIRCRAFT COMPANY, INC.

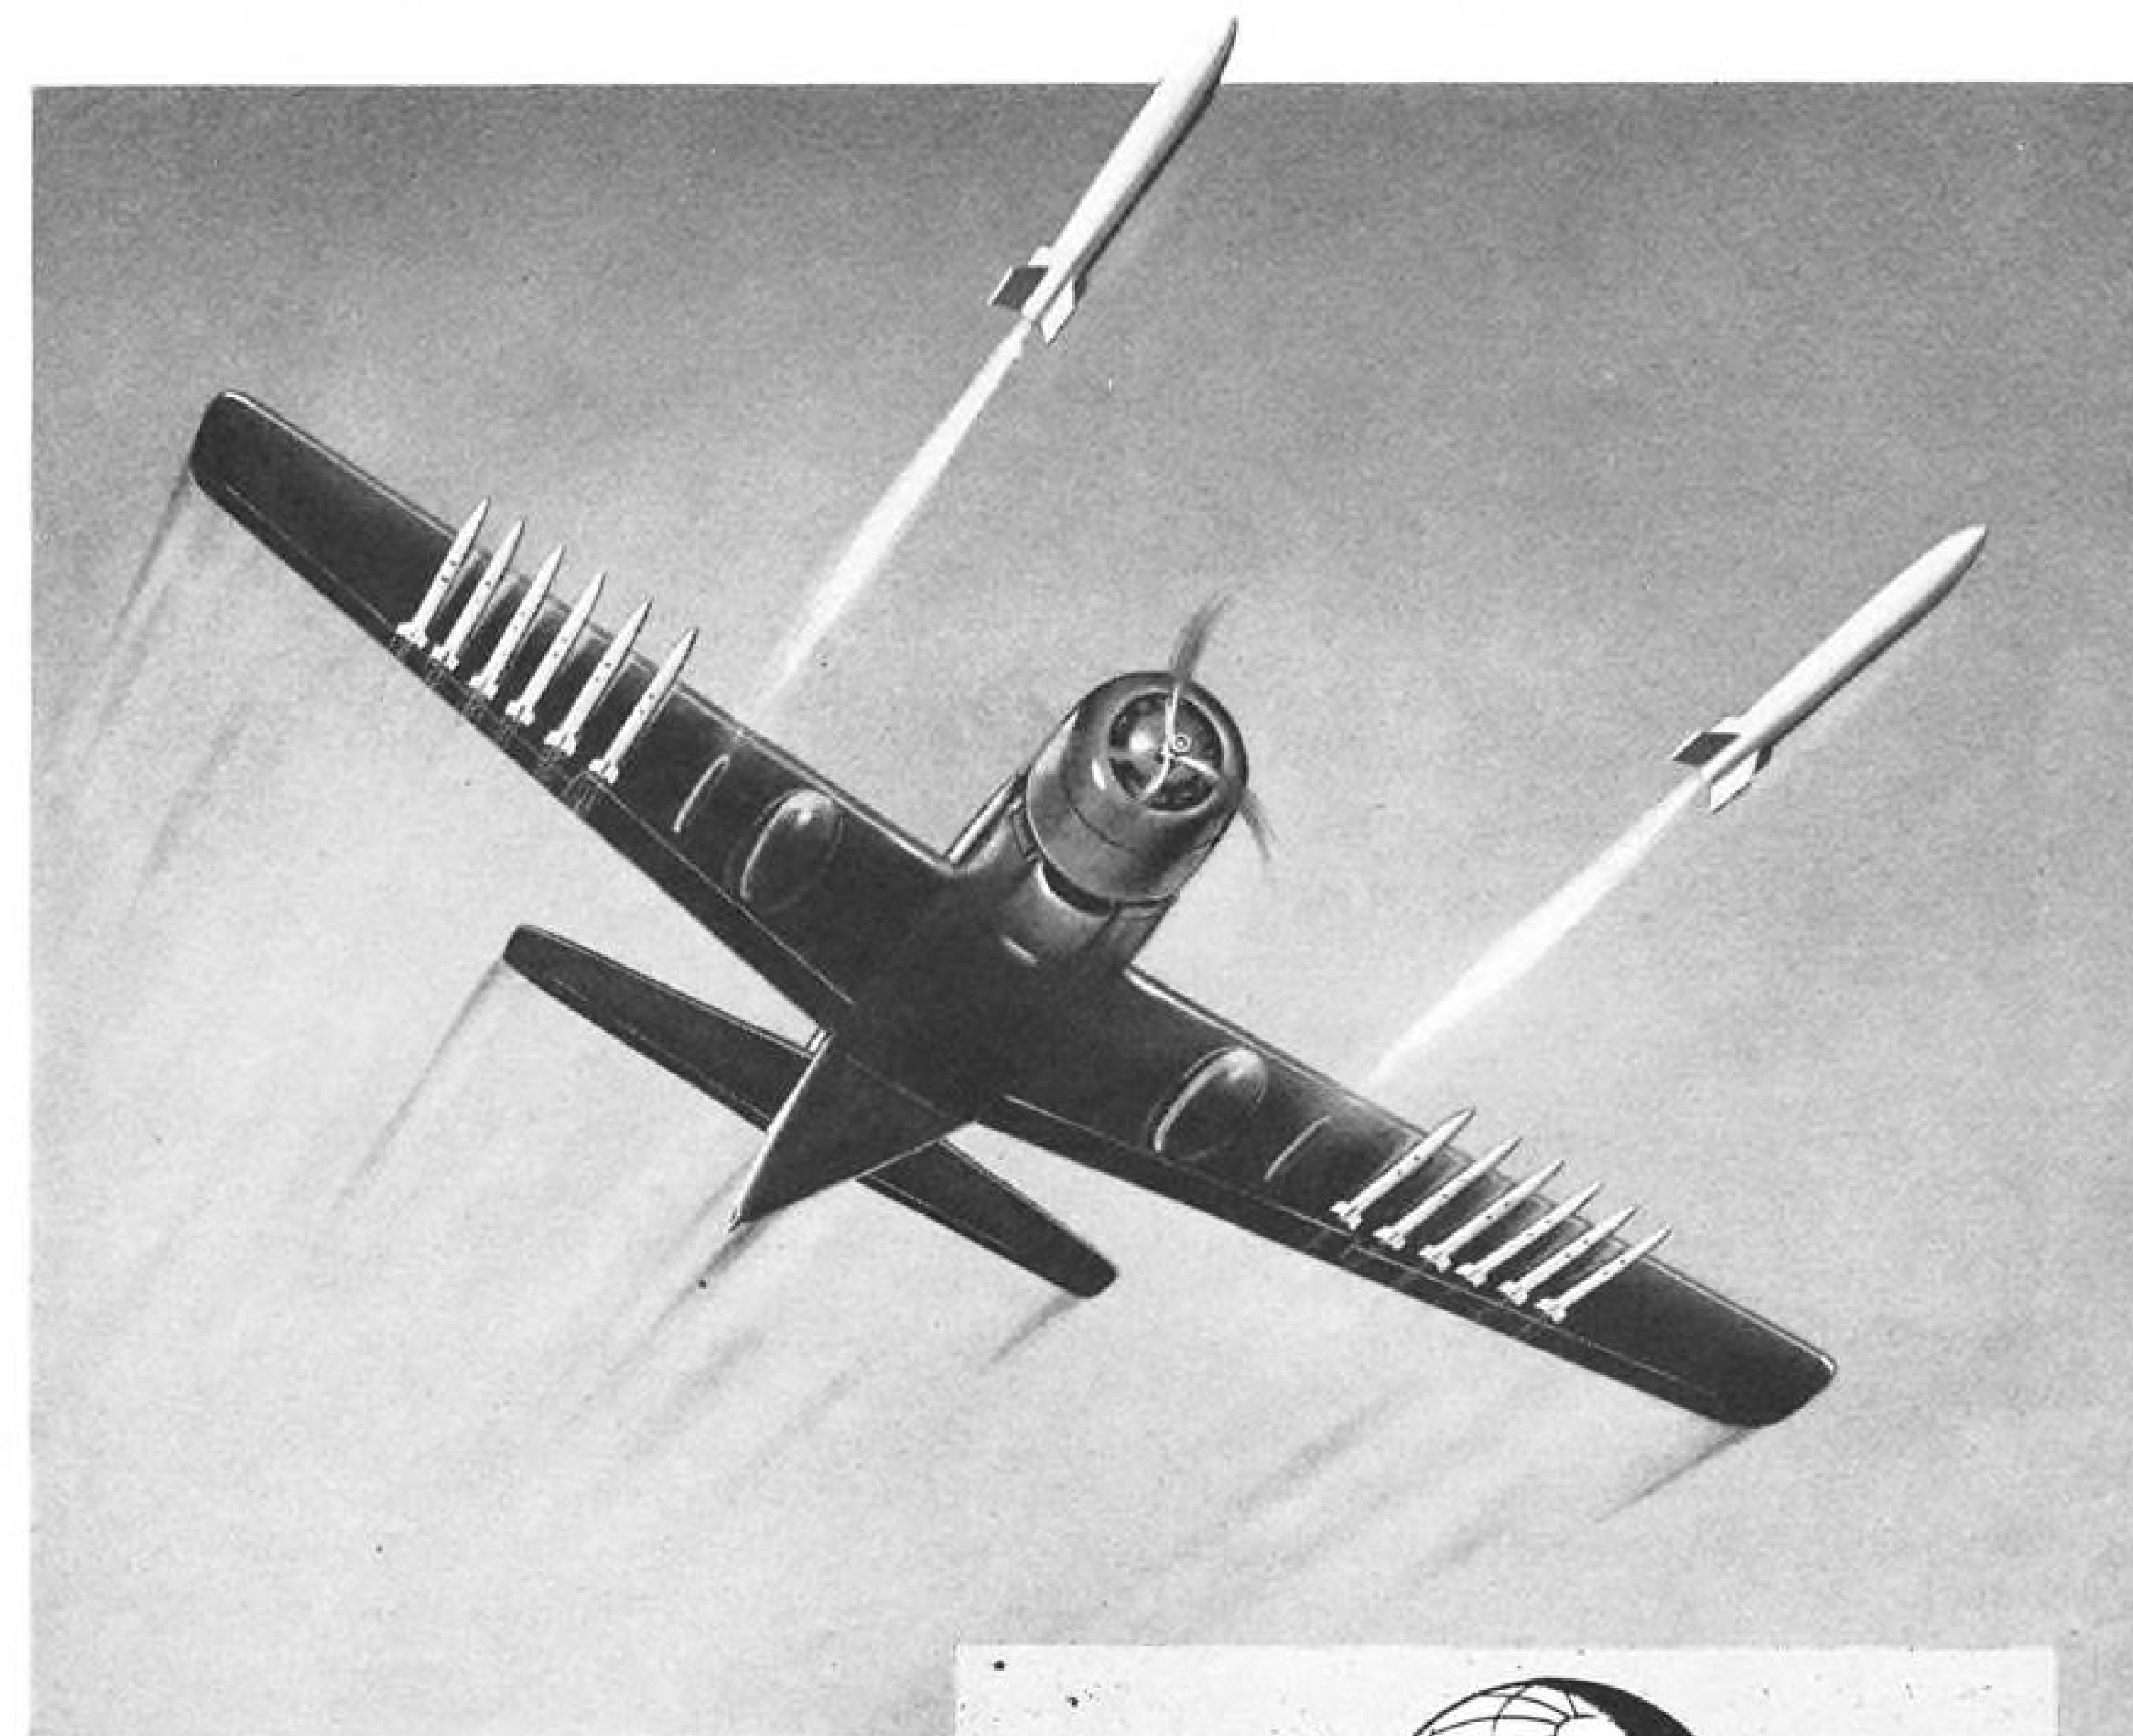

DEPEND ON DOUGLAS

30TH ANNIVERSARY YEAR



On
Convair's
XF-92A

Safety Glass

BY PITTSBURGH

This experimental jet-propelled plane, embodying many innovations not found in conventional types, could develop into the standard design for transonic and supersonic aircraft. Tests already completed have proved that vision panels encounter extreme pressure, heat and abrasion under typical flying conditions. That is why all vision panels in the pilot's canopy are aircraft type Safety Glass, developed by Pittsburgh.

LEADERSHIP in the aviation industry has come as a natural result of Pittsburgh's product development program. When progress in plane design and construction demanded improved Safety Glasses and glazing techniques, Pittsburgh met the new requirements—sometimes in a manner that made further progress possible.

Now most prominent manufacturers of military and large commercial planes are using our advanced glazing techniques to install transparent laminated plastics, photographic glasses, precision bullet-resisting glass, aircraft type Safety Glasses and double-glazed Safety Glass, all developed by Pittsburgh.

As is usually the case, the reward of this sort of leadership seems to be increased responsibility for the industry's further requirements for high quality Safety Glasses.

Consequently, our comprehensive research records, our unexcelled manufacturing equipment and our countless man-years of glass-making experience are at the disposal of all airplane manufacturers, no matter how large or how small.

When you are concerned with Safety Glasses and glazing methods, bring your problems to Pittsburgh for prompt consideration and action. Pittsburgh Plate Glass Company, 2237-0 Grant Building, Pittsburgh 19, Pennsylvania.



PAINTS • GLASS • CHEMICALS • BRUSHES • PLASTICS

PITTSBURGH PLATE GLASS COMPANY



Australia's First Homegrown Jet

The first Australian-designed jet aircraft, a missile prototype, made its initial flight Oct. 31 at the Woomera Rocket Range in South Australia.

Plane was built at the Government Aircraft Factory at Fishermen's Bend, Victoria, to specifications prepared by the British Ministry of Supply and Australian engineers.

► **Prototype for Pilotless**—Two pilot-carrying prototypes are the forerunners of a number of high-speed pilotless aircraft. Eventual plans for the series call for complete ground control of takeoff, maneuvering and landing.

Until such time as the complex control gear has been completely developed, the first two aircraft will be flown by human pilots.

Power unit is a single Armstrong-Siddeley Adder, a 1000-lb. thrust baby

turbojet developed from the Mamba. ► **Again, No Details**—No size or performance figures have been forthcoming, but a glance at the photos shows that it must be small—the overly large cockpit blister and the tiny landing gear give that away.

Wing and tail surfaces are of constant chord and thickness. Leading edges appear quite sharp and the thickness-chord ratio is low, hinting at high subsonic speed capabilities.

Overall assessment of the design is that it is a small, remarkably clean and simple jet aircraft; that it should fly at high subsonic speeds; that it should be inexpensive and easy to produce. Australia's first home-grown jet aircraft is a perky little beauty, and perhaps can well wear that self-satisfied look so evident in the top photograph.

Titanium Carbide Bonding Tested

Important gains in higher power output of aircraft gas turbines depend greatly upon increased combustion temperatures. Increased temperatures, in turn, can be accommodated only as turbine metals and compositions with greater heat resistance are developed.

Titanium is a promising newcomer here, as elsewhere in metallurgy. A recent NACA investigation at the Lewis Flight Propulsion Laboratory, Cleveland, tested the bonding characteristics of titanium carbide with 15

elements, fused individually on solid, high-density titanium carbide.

In a helium atmosphere and at atmospheric pressure, only chromium, cobalt, nickel and silicon produced satisfactory bonds—with nickel showing the best penetration.

The elements that did not bond under the conditions of the experiment were aluminum, beryllium, columbium, gold, iron, lead, magnesium, manganese, platinum, titanium and vanadium.

Full details on the apparatus used and the procedure followed appear in NACA Tech. Note 2187, authored by Walter J. Engel.

WITTEK STAINLESS STEEL *Aviation* HOSE CLAMPS

For Over a Quarter Century
The Standard of The Industry



The Wittek Type FBSS Aviation HOSE CLAMP

Utilizing the Wittek Floating Bridge, the FBSS has been tested and proved for dependable service on all types of aircraft applications.



The Wittek Type WWD Aviation HOSE CLAMP

Available in all standard aircraft sizes, the WWD is also furnished in large diameters up to 12" for duct and other special applications. Permits easy installation when hose is in place.

Meet current AN specifications
and have C.A.A. approval.

WITTEK *Aviation*
HOSE CLAMPS

MANUFACTURING CO.
4308 W. 24th Place, Chicago 23, Ill.



SECRETS ARE COSTLY!

In a competitive economy such as ours, trade secrets are usually guarded jealously. But, when national security is at stake, technical secrets become the common property of the members of a vital industry such as aviation. Guarded secrecy is too costly—too time consuming. That's why the National War Production Council was organized during World War II.

Today, under a program evolved by the Committee on Guided Missiles of the Research and Development Board of the Department of Defense, highly important developments are made available immediately to a select list of contractors, universities, technical institutions and government agencies connected with the missile program.

Here's how it works. At Bell Aircraft, or at any other major missile contractor or agency, an important contribution to the guided missile program may be developed. At once, it is relayed to other plants and agencies where it might provide the answer to a challenging problem. As a result, time—the most essential element—is saved. Costly duplication is avoided. Taxpayers' dollars are conserved and can thus be applied to other vital projects affecting our security.

From experiencing the incalculable value of this information service as both contributor and beneficiary, Bell Aircraft appreciates fully the efficiency and foresight of our leaders in defending the American way of life. We are proud to be a member of a team where secrets are shared with the front line defense.

BELL Aircraft
CORPORATION

Pioneer of Supersonic aircraft — remote controlled flight — jet and rocket propulsion — rotary wing aircraft — fighter design, armament and construction — guided missiles.

Fuel Fills Floats

An increase of 400 gal. in the fuel capacity of the Grumman SA-16, together with other minor modifications, has served to increase the range of the Albatross from its present 1900 to approximately 2550 nautical miles.

The Air Rescue Service—major user of the AF's SA-16 (Navy UF-1)—says the amphibian "is now considered qualified to fulfill the search and rescue missions."

► **Wet Floats**—The production Albatross (AVIATION WEEK July 17) has 675-gal. main tanks located in the wing center section. Mountings are provided underneath the center section for a 100, 150 or 300-gal. drop tank. "Wet Floats" are the new modification permitting the latest range increase. Each wing float has been redesigned to accommodate 200 gal. of fuel.

An additional modification involved removing the radar dome from the left wing and placing it inside the hull—simultaneously solving a balance problem and eliminating excessive stress upon the left wing float during waterborne operations.

► **Triphibian**—The next change scheduled for this versatile aircraft is the attachment of skis, which will make the SA-16 triphibious. The main supporting ski will consist of a metal strip, 12 in. wide, 15 ft. long, mounted permanently along the bottom of the hull. The aft 7-ft. portion is hinged and has oleo struts at the rear to cushion the plane during takeoffs and landings. Each of the wing floats has an extended ski.

Jet Noise Studied

The distant, thundering roar of a powerful jet engine may be reassuring to the designer—but up close it can be a pain in the ear. And it can cause nausea, dizziness and possibly temporary mental instability, to say nothing of mechanical damage to the ear.

► **Research Underway**—Programs concerned with the effects of sound of various intensities and frequencies are now underway here and abroad. One such program, at the Aero-Medical Laboratory at Wright-Patterson AFB, Dayton, Ohio, is concerned with the study of permanent damage to the inner ear.

Experiments are conducted with guinea pigs, because aural damage equivalent to that in humans can be obtained at lower levels of sound intensity.

The animals are anesthetized and exposed to damaging sound produced by a siren. Sound frequencies between 250 and 150,000 cps. can be developed, at variable and controllable intensity, by this siren. For reference, the normal ear of a young adult responds to sound frequencies between 20 to 20,000 cps.

AVIONICS

Ground Test for Omni Equipment

By Scott H. Reiniger

A newcomer in the growing staff of mechanical servants that keep complex aircraft groomed for flight is a tester for airborne omnirange equipment.

This device, intended for check out of the equipment before takeoff, is becoming a "must" item for both military and civil operators, now in the process of gradually shifting from low-frequency radio to very high frequency omni navigation instruments.

Even now, the Civil Aeronautics Administration is busy closing the last gaps in the nationwide omnirange network which makes possible the use of these visual aids in the cockpit.

► **Omni Tester Role**—Here's where the omni tester fits in. From the standpoint of time, cost and effectiveness, the only practical method of checking flight functions of airborne omni is on the ground. With a properly designed test set, this can be done as thoroughly and accurately on the ground as in flight—and in a shorter time.

For a comprehensive check in the air, the pilot would have to waste time and fuel flying a complete circle around the ground omnirange station to find out if his set was correctly calibrated through its full scope of 360 deg. A perfunctory check on several tracks in one sector of the omni circle might indicate the set was functioning properly, when actually it was out of calibration in another portion of the circle.

Even pre-flight checking on the ground by fixing on a nearby omni station would give only a single track check and that probably would be wrong. Buildings, trees, uneven terrain would give erroneous indications.

► **How It Works**—With the need for ground omni testers apparent, let's see how one operates. A set that can be used both for quick pre-flight checkouts and for general maintenance and overhaul of airborne omni is the H-14 signal generator. This tester was developed recently by Aircraft Radio Corp., Boonton, N. J.

Among airlines that have purchased this unit are American, Eastern and Capital. The Air Force and Navy also reportedly have shown interest.

This relatively high-powered, accurate set can be located in the hangar or at some other central point near a 115v. a.c., 60c. power outlet for flight line checkout or bench work. With a microphone connected to it, the set per-

mits voice instructions from the person operating it to be transmitted simultaneously with test signals to the pilot or co-worker in the cockpit. In this way, a limited "go-no go" preflight check of omni equipment in aircraft can be made in less than a minute for a single plane or a squadron of planes at the same time, ARC says.

The set will produce signals strong enough to be heard in the immediate vicinity of the airport. These can be adjusted to a lower level for single plane checks.

This is what the tester does:

- Checks for alignment of airborne omni on 24 tracks, at 15-deg. intervals.
- Checks for proper operation of 90/150 cps. runway (tone) localizer receiver, indicated by "left-center-right" movement of cross-pointer needle. Also tests for visual-aural range sensitivity and flag-alarm operation.
- Provides means for checking omni course sensitivity.
- Tests for proper operation of "To-From" meter and omni flag alarm.
- Gives cross-pointer "left-center-right" check of phase localizer. Also checks phase localizer sensitivity and flag alarm.

For bench maintenance and overhaul work, the H-14 provides signals of accurately known frequency, amplitude and modulation for quantitative tests of VHF navigational equipment, ARC says.

► **Switch in Roles**—While the pilot would have to fly around the omni station to check equipment in flight, with the ground tester, the situation is reversed. The plane stays still while the tester, in effect, goes around, sending out different track signals as it does so. These are precise, "built-in" signals, mechanically fixed at each notch on the tester's 24-track selector dial.

The omni course signals are laid down by a synchronously-driven tone wheel equipped with accurately located pick-up coils. The simulated signals are not subject to phase error, once the basic "zero phase" has been established, ARC says. The amplitudes of the "variable" and "reference" modulations are independently adjusted to the standard value, then applied to the r.f. output tube simultaneously. A modulation meter and an r.f. level meter are provided for continuous and simultaneous monitoring.

The omni tone wheel also provides "reference" and "variable" modula-

Special
Pre-Christmas Offer

**YOUR NAME STAMPED
IN GOLD—FREE**

on the covers of
these great books

Without cost you may have your name, or the name of any friend you designate, stamped in gold on the cover of any of these McGraw-Hill books.



1. JANE'S ALL THE WORLD'S AIRCRAFT

The 1950-51 Edition of the book that brings you facts and figures on both civil and military aircraft of the world. Provides data on the military air forces of 62 nations, detailing their organization, bases, equipment, etc. . . . gives all essential reference data on the operational background of civil aviation in all countries of the world . . . and includes pictorial descriptions of all present-day aeroplanes and engines. Edited by Leonard Bridgman. Over 400 pages, 8 1/4 x 13, and 3000 illustrations, \$20.00.

2. AIRCRAFT DESIGNERS' DATA BOOK

A graphic presentation of design details that will enable you to grasp the design features of many typical domestic and foreign aircraft and power plants quickly and easily. 788 illustrations and sketches of structural details show the reader starting a new design what has been done in a particular area such as wings, landing gear, control systems, etc. Provides data on land planes, seaplanes, single, twin, and four-engine aircraft, including latest foreign and domestic designs. By Leslie E. Neville. 534 pages, 8 1/2 x 11, 788 illustrations, \$10.00.

3. AIR TRANSPORTATION TRAFFIC AND MANAGEMENT

Here, from the experience of many authorities and from the files of the industry, is a comprehensive survey and guidebook to the business of air transportation, its growth and present practices. It covers the factors that control and regulate its development and operation; it describes effective methods in organization, management, and revenue-making. By Thomas Wolfe. 725 pages, 6 x 9, 185 charts, graphs, and tables, \$8.00.

Act Now! Offer Expires Dec. 24

McGraw-Hill Book Co., 330 W. 42nd St., NYC 18

Send me the book(s) corresponding to numbers encircled below according to the terms checked:
☐ With name stamped in gold on cover. I enclose remittance and understand stamped books are not returnable. (Offer expires Dec. 24, 1950.)
☐ For 10 days' examination without gold stamping. After 10 days I will send remittance, plus postage, or return the book(s) postpaid.

1 2 3
 Name
 Address
 City Zone.....State.....
 Company
 Position AW-12-4-50

Print name to be stamped here.

"You'd think I was piloting a jet..."



THE WAY THE PRINTING CALCULATOR FLIES THROUGH MY FIGURE WORK!"

If they could put wings on it, it might even win the Bendix trophy. You see, the famous Remington Rand Printing Calculator gives faster figure production—more efficient performance in the aviation factory... in the airline office. You get Rhythmic Touch Operation with the 10-Key Keyboard, automatic division and direct multiplication, greased-lightning addition and subtraction—and proof, printed on the tape.



See it today at your Remington Rand Business Equipment Center, or write for details to Business Machines and Supplies Division, Room 2558, 315 Fourth Avenue, New York 10.

Remington Rand

**PRINTING
CALCULATOR**

tions required to produce "left-center-right" readings for checking or calibrating the phase-localizer receiver.

A second tone wheel, driven by the same synchronous motor which operates the omni tone wheel, provides the 90/150 cps. signals for checking or calibrating the amplitude localizer receiver and visual aural range.

► **Full Range**—The set operates on two crystal-controlled frequencies which may be located anywhere in the localizer and omni bands, from 108 to 118 mc. Crystals are mounted in sockets on the face of the unit, facilitating removal and replacement. Unless otherwise specified, two crystals providing frequencies of 110.9mc. for localizer and 114.9mc. for omni are supplied.

The radio frequency output terminates in two BNC receptacles. At one, a fixed output of one volt is available for connection to a 52-ohm antenna load. When not in use, the receptacle is capped with a 52-ohm termination. At the second receptacle, a variable output from 1 to 10,000 microvolts is provided. This output is adjusted by means of a calibrated attenuator on the control panel. The source impedance of both output connections is 52 ohms. Shielding of stray fields is such that measurement can be made without appreciable error on receivers having a sensitivity of one microvolt, ARC says.

Audio modulation derived from the r.f. output is available at the "Demod" receptacle on the face of the tester. This output is provided for testing audio converter circuits independent of the r.f. for maintenance work. Two binding posts (Ext. Mod.) are provided for modulating the r.f. from an external source. For example, a keyed signal might be applied for identification purposes. External modulation at this point is effective in all positions of the main function switch except when the operator is actually talking over a microphone hooked into the set.

► **Built-in Ruggedness**—The H-14 operates on 115v., a.c., 60c. current, draws 160 watts. A built-in electronic voltage regulator maintains d.c. levels to the required constancy for supply voltages from 103 to 128v.

The tester is designed to meet moisture, shock and vibration requirements of current military specifications for such equipment and operate through ambient temperatures from -40 to 50 C.

ARC lists these accuracies for the unit: Frequency, ± 0.005 percent from -40 to 50 C.; omni track angle, $\pm \frac{1}{2}$ degree at room temperature, ± 1 degree from -40 to 50 C.; r.f. output, ± 2 db.; modulation, ± 2 percent.

The H-14 measures $10\frac{1}{2}$ x $17\frac{3}{4}$ x $12\frac{1}{4}$ in. and weighs 39 lb. Priced at \$885 f.o.b., the tester comes equipped with necessary power supply and r.f. cables.

Many of today's leading military aircraft are powered by the WESTINGHOUSE J-34 Jet Engine with FUEL SYSTEM by HOLLEY

HOLLEY
Carburetor Co.

FOR HALF A CENTURY,
ORIGINAL EQUIPMENT
MANUFACTURERS FOR
THE AUTOMOTIVE AND
AIRCRAFT INDUSTRIES

DETROIT 4, MICHIGAN



Travel Queen of 1950

More Americans have traveled overseas in 1950 than in any previous peacetime year. And the most startling increase has been in the number who have gone by air. More tourists have actually traveled by plane than by ship!* And nearly a quarter of a million people have flown the oceans in Boeing Stratocruisers.

These great twin-deck airliners, in service only a few months when 1950 began, have established new standards of comfort in travel by air. They are

spacious, with ample room to move about in the main-deck cabin and the luxurious lower-deck lounge. Rest-room facilities are large and well-appointed. Modern galleys permit the serving of hot, tempting meals.

Air and altitude conditioning aboard the Stratocruiser are the finest ever developed for any aircraft. Like the deep, soft, specially designed seats, indirect lighting and soundproofing, they add to passenger comfort—make Stratocruiser

travel not only the fastest, but one of the world's most luxurious forms of travel.

People who can afford to travel as they like, as well as those of modest means, choose the swift, economical Stratocruiser that speeds them over the oceans in hours. But beyond that, they know Boeing's record of staunchness and dependability. They know the integrity that goes into the design, engineering and manufacture of all Boeing airplanes.

*Based on latest available information from U. S. Immigration and Naturalization Service.

BOEING

Boeing has built fleets of Stratocruisers for these forward-looking airlines:
PAN AMERICAN WORLD AIRWAYS • NORTHWEST AIRLINES
UNITED AIR LINES • BRITISH OVERSEAS AIRWAYS CORPORATION
 For the Air Force, the B-50 Superfortress, B-47 Stratojet and C-97 Stratofreighter.

EQUIPMENT



A Continental CV 240 on which the airline is solving augmentor tube failure problems.

CAL: Progressive Midwest Carrier

Continental Air Lines overhauls engines, tests latest types of equipment at Stapleton Field.

By George L. Christian

Denver—Overhauling higher-powered aircraft engines can be a tricky business, with plenty of headaches. But Continental Air Lines feels it is successfully blending the ingredients of skill, careful planning and precise testing to handle the problem at its maintenance base here.

This is no idle boast. A. P. Shelly, CAL's director of maintenance and engineering, says Continental had fewer unscheduled removals in 1949 of its R-2800 Pratt & Whitney engines (used on Convair 240s) than any other U. S. airline. On a world-wide basis, the only operator whose unscheduled removal rate bettered Continental's for 1949 was KLM Royal Dutch Airlines, according to Shelly, who said his source was P&W's service statistics.

Here are other equipment and maintenance notes gathered at the airline's main overhaul base at Stapleton Field, Denver:

Continental's CV 240s have been experiencing trouble with the forward cabin windows, according to Shelly. The windows are damaged by rocks, gravel and other matter picked up by the low-clearance propellers and flung against the forward portions of the fuselage.

The airline is investigating the desirability of replacing the forward four or five windows with Sierracin panels whose hardness, it feels, will better resist the impact of propeller-thrown objects.

Wayne Lydon, instrument overhaul foreman, expressed satisfaction with the

performance of the Bendix-Scintilla ignition analyzer which Continental has had in service since April. All of the airline's Convairs (total of 5) are wired to receive the instrument which is used primarily on the ground.

At each No. 1, 2, and 3 check, the analyzer has aided greatly in detecting incipient ignition malfunctions. It is also used whenever an ignition "squawk" shows up on the log book and on the engine run-in stand where overhauled engines are checked.

The airline's engineers pointed out these advantages realized with the analyzer:

- **Incipient ignition failures** (improper magneto or distributor timing, fouled spark plugs) could be detected and corrected before the malfunction manifested itself on any of the cockpit instruments.

This feature increased on time performance and, primarily, was of a great safety value. Continental is especially conscious of engine performance because of the many marginal, high-altitude fields it operates through.

- **Time saving** in analyzing ignition trouble is considerable. The guess work in trouble-shooting is practically eliminated since the instrument enables mechanics to localize the source of trouble rapidly and accurately.

- **Money saving**, not only because troubles are found more quickly, but also because less replacement material is required. If plugs foul up, the analyzer "puts the finger" on the bad actors and thus one, two or three plugs are changed instead of a complete set of 36.

Continental said that total cost per

plane for installing the necessary parts and wiring was \$250 plus labor. Time required is 90 manhours per ship.

The airline has not yet been able to determine accurately the actual savings in time and money attributable to the use of the Scintilla unit but it is sure they are considerable.

Continental engineers proudly point to the fact that they are the first U. S. scheduled airline to use the Sperry Zero Reader (AVIATION WEEK June 12). KLM Royal Dutch Airlines already has the instrument installed in its Constellations.

The airline reports that its pilots are enthusiastic about the Reader and that it is considering making it standard equipment on its fleet of Convairs. The one Reader now on service test has operated satisfactorily for 100 hr. The airline anticipated an initial overhaul period of 1000 hr. with 1500 hr. a good possibility. Total installation cost was \$184.37 and 90 manhours.

Shelly told AVIATION WEEK that dynamically balancing the Convair tire and wheel assembly, a newly instituted procedure, has resulted in a considerable reduction in vibration during the take-off roll. This is especially true of the nose gear. Continental balances the wheels at speeds up to an equivalent of 140 mph.

Shelly continued that his airline believes it has found the solution to the augmentor tube failures which have plagued Convair operators for so long. Tubes made of Roslyn Metal are the answer, he thinks. A laminated material made up of two thicknesses of stainless steel sandwiching a layer of copper in between, the material has given excellent results on the one aircraft on which it is being service tested.

Shelly anticipates the Roslyn Metal augmentor tubes will give a service life of 5000-6000 hr.

Continental is currently evaluating the BG RB27R fine wire, platinum spark plug (AVIATION WEEK Sept. 4) with Champion's R37S-1 mass electrode plug in its R-2800 P&W engines equipped with the Bendix-Scintilla low tension ignition system.

Both types are now being removed at 300 hr., and fouling rather than erosion tends to be the factor limiting plug life. The airline says it has not accumulated enough time on either make of plug to decide which one to use.

Continental is replacing all its Eclipse Pioneer tachometers with Kollsman dual units embodying built-in synchroscopes.

On the basis of a test installation, engineers noticed a considerable reduction in tachometer oscillation and in

overhaul cost. An added feature was the inflight reduction of off-synchronized propeller beat.

The Kollsman unit derives its power from the existing tachometer generator.

Continental expressed complete satisfaction with the new type single disc Goodyear brakes recently installed on its Conquairs. The airline said that the braking action was excellent and that overhaul and maintenance on the units was routine.

CAL expressed dissatisfaction with the seats originally supplied in the Conquairs. Maintenance was high and comfort low. So it is currently converting all CV-240 seats to airfoam cushions. The airline admitted that this was an expensive conversion, but felt that the considerable reduction in maintenance made the expenditure justifiable. It was equally sure that its passengers would welcome the increased comfort afforded by the foam rubber.

Shelly pointed out that, although Continental is small as U. S. airlines go, it is keeping pace with the latest technological advances in the airline equip-

ment field. The results of this continuing effort to stay abreast, he feels, can result only in a safer, more efficient operation.

British Report on Airborne Radar

Airborne radar will result in safer, more punctual flight.

British Overseas Airways Corp. already is installing such equipment, manufactured by E. K. Cole, Ltd. (AVIATION WEEK, Aug. 14) in Hermes aircraft. The airline's technical department, in conjunction with E. K. Cole, cite the following reasons for improved flying conditions resulting from airborne radar.

"Fuzzy" indications on the radar scope, indicating moderate rain, can be distinguished from the smaller, more sharply defined echoes characteristic of cumulo-nimbus clouds by a "reasonably experienced observer." The latter type of cloud is the only one which produces hail.


Use of the radar will reduce diversions because fronts which appear impenetrable to the naked eye usually have navigable gaps when explored by airborne radar.

► **Key to Design**—Design of future equipment can be predicated on the operational data obtained with current equipment, especially when further experience is gained with a variety of aircraft in varying conditions of turbulence.

Ability of the radar to detect and give ample warning of ground obstructions is of undeniable importance.

Passenger comfort is greatly increased because of the pilot being able to detect and circumvent turbulent areas. As speeds of aircraft increase, and commercial jets enter the transport field this attribute will also have safety implications.

The normal British flying practice is for one pilot to study the screen while the other flies the aircraft. Thus the pilot's eyes do not continuously have to readjust themselves from outside to interior illumination.

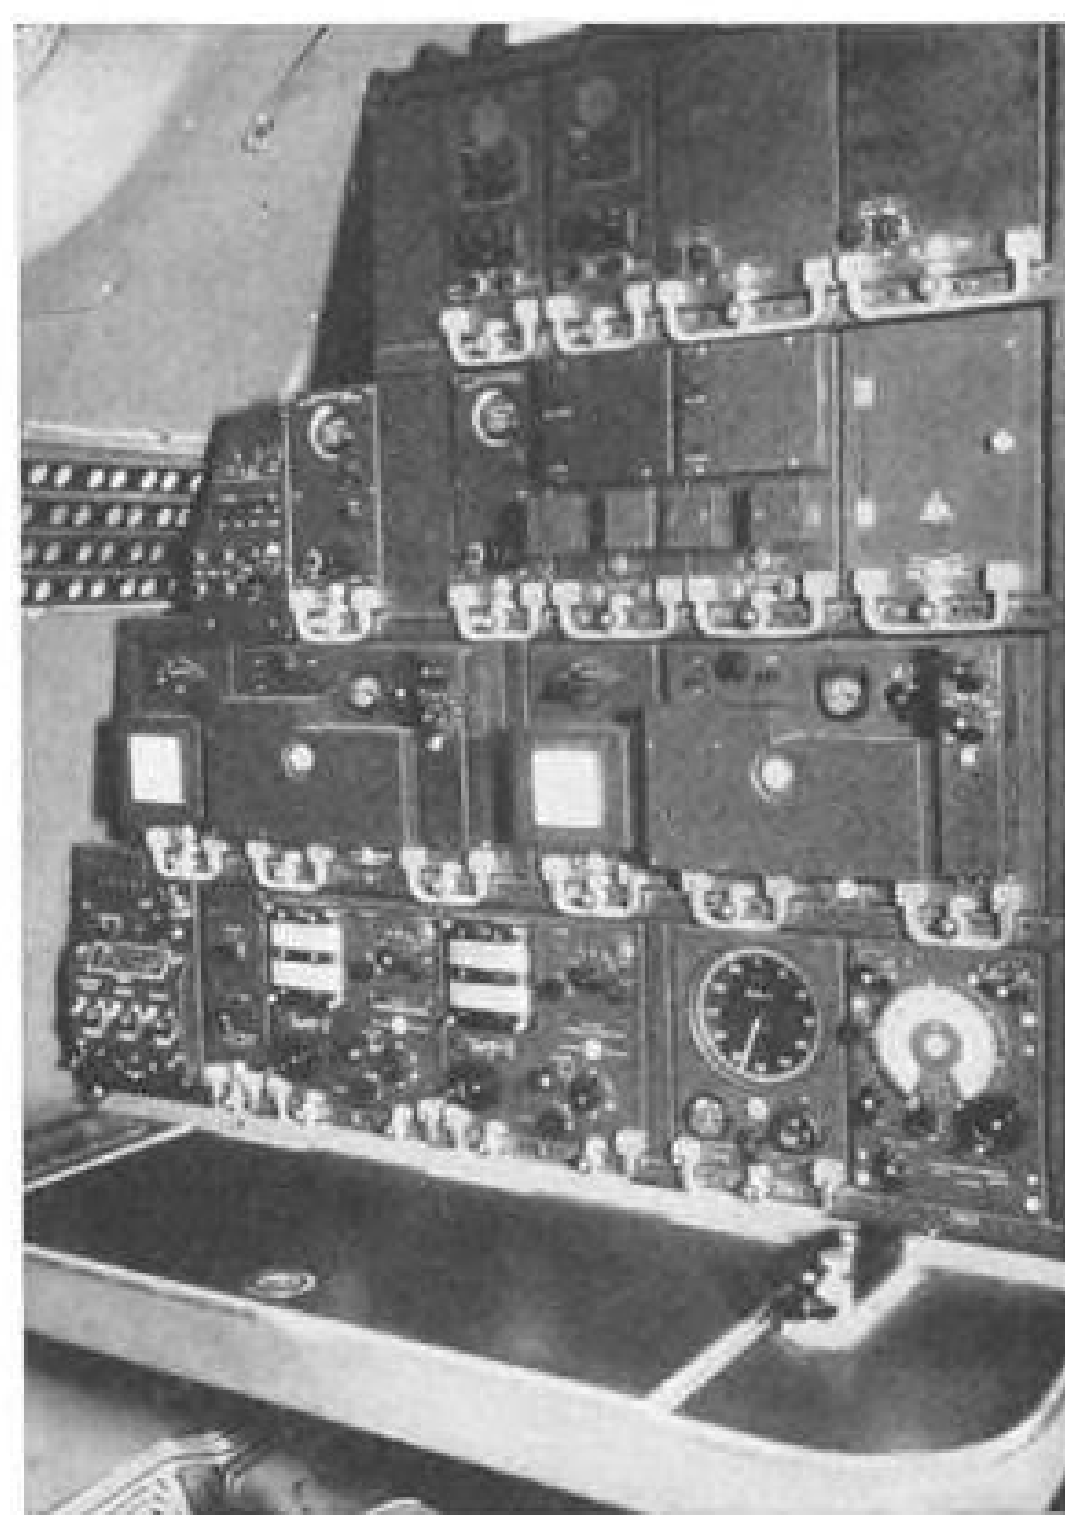

BOAC Shows "Comet" Radio Gear

(McGraw-Hill World News)

These newly released pictures show British Overseas Airways Corp.'s de Havilland "Comet" cockpit radio installation.

Left photo shows, above the pilots' heads, the two control units for the Marconi 7092A automatic direction finder.

Relative bearing indicators are on instrument panel, one in front of each pilot.

Right photo illustrates arrangement of radio and navigational aid equipment aboard the aircraft. The sets are identified as follows:

- **Top row:** two intercom units, two power units for the Marconi AD107 high power transmitters.
- **Second row:** aircraft switchboard, two voltage regulators, two Marconi AD-7092A automatic direction finders and spare boxes.
- **Third row:** dual Marconi AD107 drive

and amplifier installation.

• **Bottom row:** Intercom station box, direction finder switch box, two Marconi AD94 communications receivers, Marconi AD7092A indicator and radio loop controller, Marconi AD7092A control unit.

Provision has also been made for omni-range equipment, high- and low-range radio altimeters, Loran and airborne radar (AVIATION WEEK, Aug. 14 and above.)


FAST MOBILE PARATROOPERS

AND SUPPLY LINES...

PIONEER PARACHUTES give new troop mobility and supply line efficiency to the U.S. Armed Forces. In Exercise Swarmer, parachutes produced by Pioneer dropped thousands of fully equipped paratroopers and tons of supplies and fighting equipment when and where necessary . . . safely and efficiently. Pioneer was chosen to manufacture the cargo 'chutes used in this massive, successful air exercise because Pioneer has a special department for the manufacture of cargo 'chutes and its "know how" and manufacturing facilities could be depended upon. Pioneer makes a parachute for every purpose . . . from eight feet to 150 feet in diameter . . . for cargo as heavy as a cannon or an air-sea rescue boat to cargo as precious and fragile as life-giving plasma.

PIONEER PARACHUTE COMPANY, INC.
MANCHESTER, CONNECTICUT, U. S. A.
 CABLE ADDRESS: PIPAR, Manchester, Conn., U. S. A. TELEPHONE: Manchester 4157

NEW AVIATION PRODUCTS

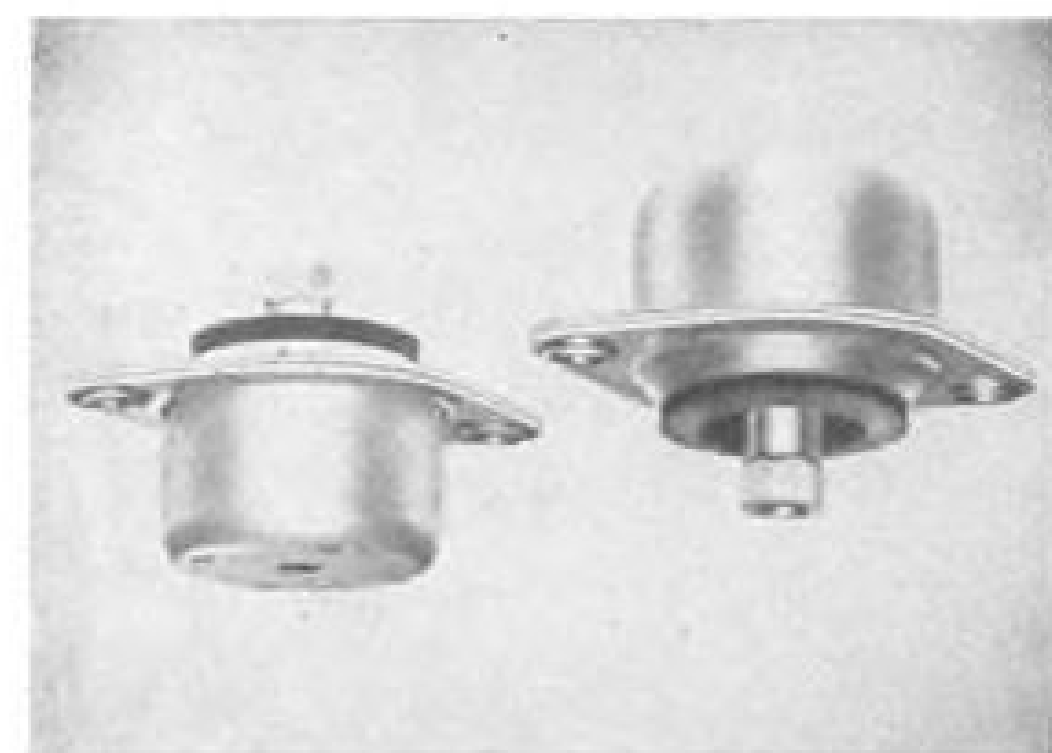

Airborne Mounts

Inverted, air-damped shock mounts are being produced by Barry Corp. for use with lightweight airborne equipment that must be installed where space is restricted.

These units, Series 6475 Barrymounts, have load ratings ranging from 0.3 to 3.0 lb., provide effective vibration isolation with advantages of air damping, yet raise supported equipment only $\frac{1}{4}$ in. from mounting surface.

Mounts measure one inch in diameter, have an overall height of one inch under minimum rated load. Center stud is tapped to a depth of $\frac{1}{4}$ in. with an 8-32 thread. The firm says racks utilizing these new mountings can be furnished to government specifications. Address: 179-F Sidney St., Cambridge 39, Mass.



Shakes Jet Gages

While the Barry mount, described above, is designed to take out vibration, here's a unit that, because of different circumstances, is designed to put it back in.

The device pictured here is an instrument panel vibrator—an outgrowth of the jet age. Where piston engine flight has created problems of too much vibration, jet engine flight has created a problem of too little vibration.

Altimeters, airspeed indicators and other gear-operated instruments in

smooth-flying jet planes register erratically or lag if not subjected to a certain amount of vibration to overcome gear friction in the instruments. Hence the instrument panel vibrator. It shakes them up as needed.

This unit was developed by Safe Flight Instrument Corp., White Plains, N. Y. A small electric motor in the device turns an eccentric weight 2000 to 3000 rpm. The vibrator is hermetically sealed, operates on 27v.-d.c. current with a maximum drain of .04 amps. Equipped with radio filters, the unit weighs only 11 oz., measures $4\frac{1}{2} \times 1\frac{1}{2} \times 1\frac{1}{2}$ in. Safe Flight says the panel shaker is being produced in quantity for the Boeing B-47 Stratojet.



Small Field VHF

A new low-cost, two-way VHF voice communications package tailored to meet the needs of small airports not now equipped with tower facilities has been developed by Lear, Inc.

Called the Unicom "Portable VHF Control Tower", the equipment includes a crystal-controlled, single-channel VHF transmitter, VHF tunable receiver, speaker, microphone, a.c. power supply, antenna and 60-ft. antenna cable. Transceiver, power supply and speaker are combined in a single, portable unit weighing only 24 lb. Carrying handles facilitate moving the unit from one location to another.

Setting the unit up merely involves assembling a simple antenna and plugging the receiver-transmitter to a 110v., 60c. power source. Lear says anyone licensed to operate a transmitter in an airplane is qualified to operate the Unicom on the ground.

Controls consist of an on-off power switch, receiver tuning knob, receiver volume control and a transmit-receive button on the microphone. Flipping on the power switch energizes both receiver and transmitter.

The transmitter is rated at a full 2 watt output, operates on a nominal frequency of 122.8mc., and requires no adjusting. Receiver is tunable over the 108-127mc. frequency range and has a

special calibration button which permits the operator to calibrate it aurally at the 122.8mc. frequency. It is stable to .01mc., incorporates automatic volume control and noise limiter. The antenna, for both sending and reception, is a vertical radiator type with a four-rod horizontal ground plane. The Unicom sells for \$495 f.o.b., 110 Ionia Ave., NW., Grand Rapids 2, Mich.

Air Cargo Loader

"Mobiloader" air cargo-handling conveyor belts developed by Sage Equipment Co., have been ordered in quantity by American Airlines, according to the maker.

The first unit in an order totaling \$160,000 reportedly has been placed in operation at Buffalo Airport. The equipment, consisting of a 21-ft. conveyor belt mounted on a specially-built Chrysler truck is expected by AA operations personnel to speed freight and luggage handling by 50 percent, Sage says.

The belt is mechanically controlled, has a rough, rubberized surface and is supported in a frame that can be quickly raised or lowered and eased forward or backward when the truck maneuvers into position. Address: 30 Essex St., Buffalo, N. Y.


ALSO ON THE MARKET

Permanent, non-launders headrests made of Venlon plastic, produced by Firestone Plastics Co., will not absorb dirt or moisture, simply require wiping with detergent after each trip to keep clean and sanitary, says the firm. These non-rumpling headrests are fabricated by Howard Zink Corp., Passaic, N. J.

"Allspeed Drive" variable speed transmissions with tandem belts come in six models with ratings ranging from 1 to 15 hp. Each model offers six drive variations from 16:1 to 6:1; can be supplied with built-in motor. Made by Worthington Pump and Machinery Corp., Holyoke, Mass.

Portable electric arc welder, Model 125A, has 16 heat stages from 20 to 125 amps., handles $1/16$ to $5/32$ welding rod. Compact unit has sloping control panel for easy operation, simplified terminal control. Made by Trindl Products, Ltd., 17 E. 23 St., Chicago 16, Ill.

Keyless drill chucks from Europe are available in $\frac{1}{4}$, $25/64$, $33/64$ and $\frac{3}{8}$ -in. sizes. Self-centering chucks, made by Leo Hjort Co., Denmark, are built to close tolerances. Available from Hauser Machine Tool Corp., 30 Park Ave., Manhasset, N. Y.

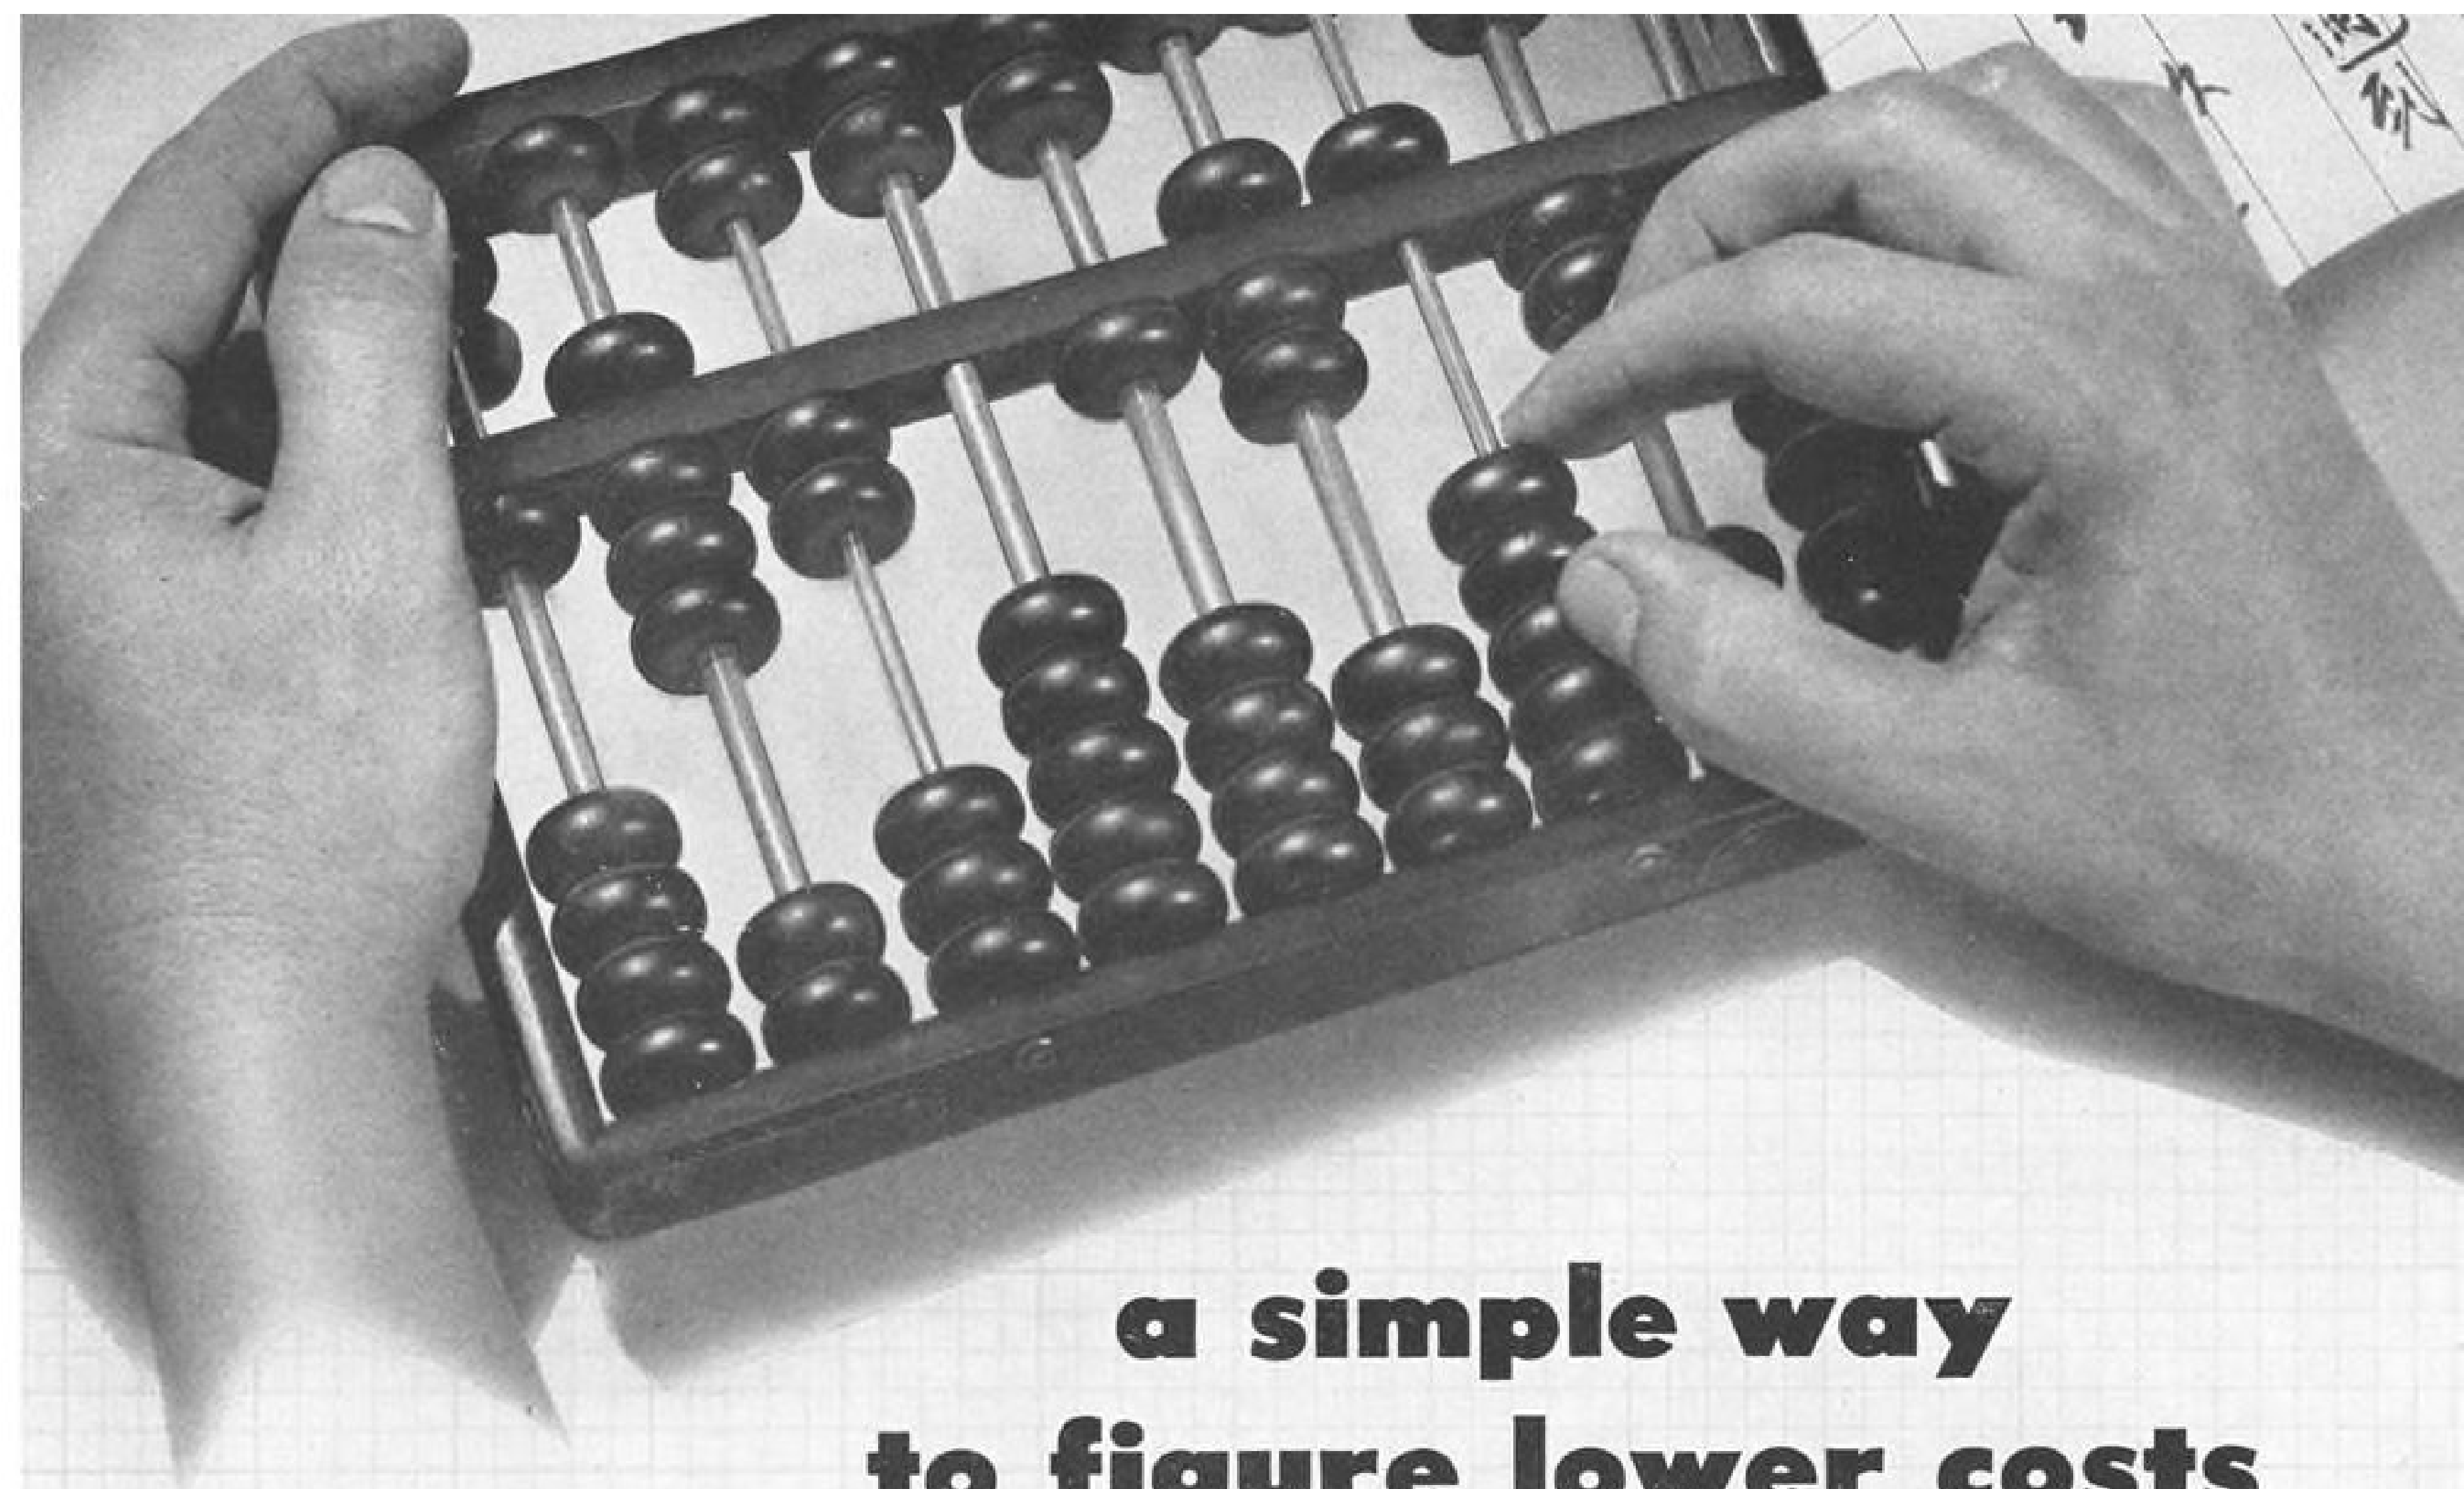


**a simple way
to figure lower costs**

It's easy to compute the savings you realize with Torrington Needle Bearings.

There's the low first cost. And the cost of related parts stays down to a bare minimum. You only need a plain bore housing and a hardened and ground shaft. You can subtract the expense of machining shoulders and grooves, of providing snap rings or other retaining devices—they simply aren't needed. And you save time and money in assembly—a simple arbor press operation seats the bearing by press fit.

Keep your designs clean, and your costs low, the simplified Needle Bearing way.

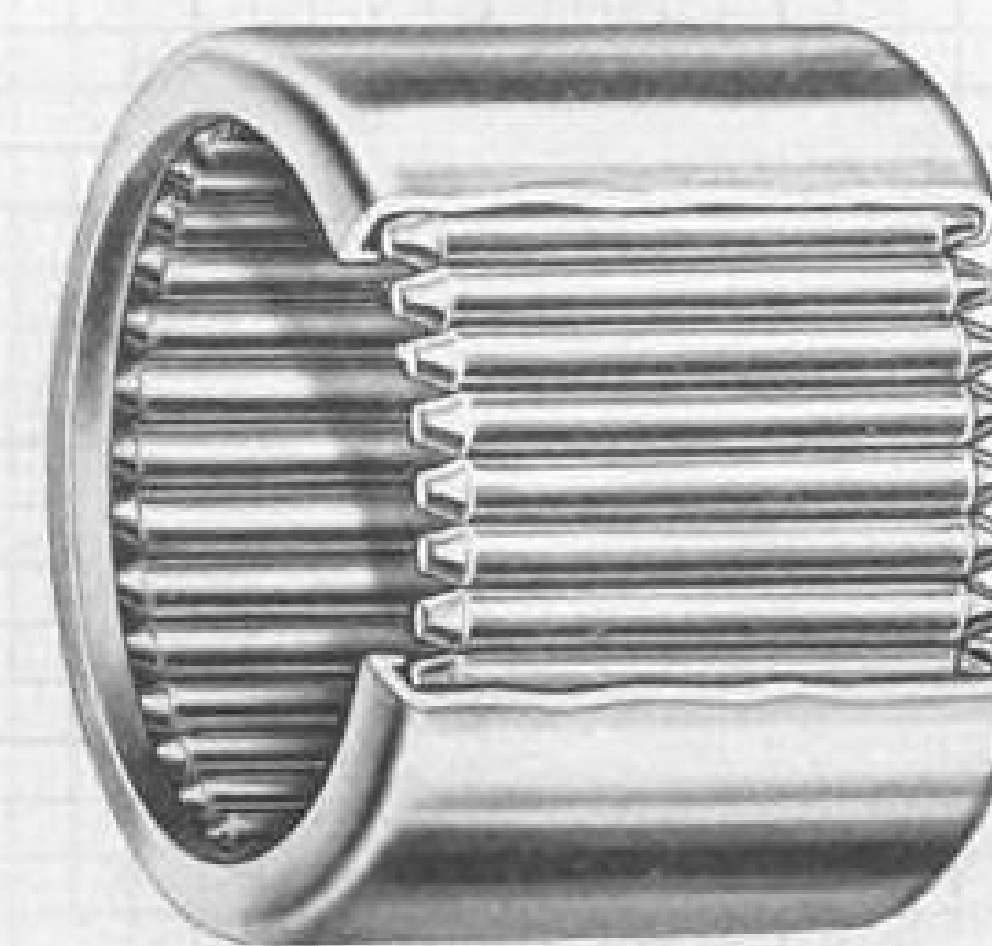

THE TORRINGTON COMPANY

Torrington, Conn. • South Bend 21, Ind.

District Offices and Distributors in Principal Cities of United States and Canada

TORRINGTON NEEDLE BEARINGS

NEEDLE • SPHERICAL ROLLER • TAPERED ROLLER • STRAIGHT ROLLER • BALL • NEEDLE ROLLERS

Maintaining winter schedules is easier with dependable **EXIDE AIRCRAFT BATTERIES**

Air transportation officials, in reporting improved schedule regularity during the winter months, give much credit to efficient electronic aids. Important to their operation are batteries of all-weather dependability. Most of the batteries now in use by all leading airlines are Exides.

In Exide Aircraft Batteries you get dependable performance—the ability to absorb heavy power loads momentarily and to deliver whenever called upon. You get the assurance of long battery life, low cost maintenance—maximum battery economy.



"Exide" Reg. Trade-mark U. S. Pat. Off.

1888 ... DEPENDABLE BATTERIES FOR 62 YEARS ... 1950

THE ELECTRIC STORAGE BATTERY COMPANY, Philadelphia 32 • Exide Batteries of Canada, Limited, Toronto

FINANCIAL

CAB Asks Interchange Agreement

Request that EAL enter through-service pacts is strongest Board support yet of such arrangements.

The principle of equipment interchange received strong impetus through the unprecedented action of the Civil Aeronautics Board in requesting Eastern Air Lines to enter into agreements with two other carriers to provide through air service between Miami and several midwestern cities.

This is the first time the Board has taken the initiative in proposing a through-service involving equipment interchange among two carriers. In the past, CAB merely passed judgment on such proposed arrangements as conceived by the carriers themselves.

In this instance, the Board proposes to link Miami with Kansas City, Omaha and Denver in a one-plane service operated by a combination of airlines. CAB has requested Eastern to arrange with Mid-Continent Airlines for a no-change service between Miami, Omaha and Kansas City via St. Louis where the two lines meet. CAB has also asked Eastern to arrange with Braniff Airways for through-service between Miami and Denver, via Memphis, a common terminal for both companies.

The Board has declared that it has authority to compel the airlines to enter into such agreements but would not use this power at present. Instead, it would "keep the record open" for 60 days to permit the airlines to work out the arrangements "voluntarily" among themselves.

► Compromise Measure—In this Board action, the equipment interchange device may emerge as a compromise measure in broadening the nation's air pattern without creating uneconomic paralleling of operations.

For the most part, existing interchange arrangements, along with those now pending, have been created to break certain stalemates or to head off potential new route competition. Ironically, the interchange approach has seldom been advanced with the initial objective of providing improved service to the public in preference to seeking new route extensions.

The Board, in recent years, through official statements and actions, appears to have favored interchange as an instrument in effecting these necessary revisions. But its current action involving Eastern is the most positive yet expressed in this direction.

► Economic Program—For example, as part of its "Economic Program for 1949," CAB in February, 1949, instituted a series of proceedings designed to eliminate uneconomic competitive services in certain key areas. These inquiries were centered in three separate cases. They involved competitive services between Chicago and Washington, Detroit and New York, and between Minneapolis and Washington along with that of Detroit and Washington.

As a major approach, the Board is seeking to determine if interchange agreements established in the place of competitive services would eliminate duplication of operations.

In these proceedings, the Board refrained from its recent assertion that it had the power to compel airlines to enter into interchange agreements. This reluctance is probably dictated by the realization that the necessary companion measure—the cancellation of existing certificates of public convenience and necessity—may be open to serious legal question.

► Cross-Country Route—With oral arguments recently concluded, the Board will soon rule on the Southern-Service-to-the-West Coast. A CAB examiner has previously recommended that Eastern be granted an extension to the West Coast, making it the fifth transcontinental line. At the same time, the interchange agreement between American and Delta was endorsed for continuation on a permanent basis instead of remaining temporary. The Board's determination in this proceeding will serve as another expression of major policy on the interchange principle.

At present, American and Delta interchange at Dallas. There is considerable agreement that this service is inferior to and nowhere as desirable as one-carrier one-plane service. The proponents of this arrangement contend that existing and potential traffic in the area cannot support another transcontinental route. It is these basic evaluations which will determine the Board's decision in this case.

The existing American-Delta interchange arrangement was approved by the Board in August, 1949. There is no doubt that the two participating carriers were motivated to provide this service in order to counteract Eastern's

pending application for a new route to the west. Subsequently, TWA and Continental filed a proposal for a Houston-West Coast interchange. This was soon countered by an application filed jointly by American and Braniff to provide a Houston-West Coast interchange service of their own.

Eastern, for its part, more than a year ago, advanced an interchange agreement with National to provide one-plane service between Miami and Houston and San Antonio via Tampa and New Orleans. It happens that Delta has a pending application for a new route between points in the same general area.

► Jockeying for Position—It can be seen that a number of equipment interchange proposals have been filed as part of the general strategy in jockeying for position in various route proceedings.

Despite the professed desire for equipment interchanges, only four of these arrangements—three domestic and one international—have been approved by the Board.

The first attempt in interchange was made by United and Western under an agreement approved in March, 1939. Provision was made for through-sleeper service at Salt Lake City, eliminating change of equipment at that point for passengers traveling between Los Angeles and points east of Salt Lake City. Subsequent testimony showed that Western maintained that this was a satisfactory arrangement while United stoutly contended that this tie-up was highly unsatisfactory. In time, it was abandoned.

The equipment interchange device was applied in May, 1947, to settle a very difficult situation existing between Pan American Airways and Pan American Grace Airways. This arrangement brought Panagra into Miami and represented a compromise in its repeated attempts to gain a direct entrance for its flights into the United States.

The equipment interchange arrangement between TWA and Delta, approved by the Board late in 1947, avoided creating new route mileage and improved passenger service. One plane service is possible on TWA's system from Detroit, Toledo and Dayton to Atlanta, Miami and other Delta points through the interchange effected at Cincinnati.

The American-Delta pact providing for interchange at Dallas has previously been noted.

In April, 1949, the CAB approved an equipment interchange deal between Capital and National providing service between Minneapolis and Miami through Washington. However, actual operations in this instance have not yet been inaugurated. —Selig Altschul

No Additional Coach Operators Needed?

Examiner holds present carriers could develop low-cost mass market.

No special new coach airlines should be certificated says Civil Aeronautics Board examiner, William J. Madden.

Examiner Madden says the Board should reject the applications of four nonskeds for certification as scheduled transcontinental lines furnishing only coach-type service. The applicants are Air America, California Eastern Airways, Trans-American Airways and Great Lakes Airlines.

Madden's 102-page report considers the question: Should there be any new all-coach airlines added to the U.S. scheduled transcontinental route pattern?

The individual qualifications of the applicants are unimportant beside this basic issue.

Madden concludes:

- **Lower fares are possible** on transcontinental runs. That is because the transcontinental big-city routes are the cream of the crop.

- **Present operators** can probably deliver just as low coach fares as could any new applicant. And the present operators don't need the spur of competition from coach "specialists" to undertake "mass-market" service. Madden recalls that Capital Airlines was the first regular operator to start air coach, and that was between New York, Pittsburgh and Chicago, where there was little nonsked competition.

- **Diversion of traffic** from regular operators would endanger the whole industry's financial health. The applicants admit there would be some direct diversion. But they contend that the certificated carriers will get even more "new business . . . from increased enthusiasm for air travel." The CAB examiner, after weighing this claim, concludes: "No prudent person would cancel out the possibility of such dire consequences (industry losses) with the wishful argument of the applicants that they will be compensated by such an illusive reward as increased enthusiasm for air travel."

- **Existing Coach Services**—Examiner Madden rejects the idea of new operators coming into the picture to experiment in mass-market coach service. But he does not discredit the "coach experiment" as such. Here is what he says about transcontinental coach service:

Transcontinental Coach 1950

AMERICAN AIR LINES TRANS WORLD AIRLINES

	Passengers	Load Factor	Passengers	Load Factor
Jan.	2096	38	1807	44
Feb.	1728	37	1997	44
Mar.		..	3089	63
Apr.	3832	85	2645	52
May	6226	89	3615	71
June	6785	94	6911	89
July	6777	91	6958	89

"The answer to the one remaining question—should the existing carriers operate coach services?—is being prepared from the cold facts of experience. Full and fair experiments in transcontinental coach services are now being conducted both by American and also by TWA.

"If a continuation of such services is warranted on the basis of this experience, the Civil Aeronautics Act in Section 404(A) and 1002 provides the Board with adequate powers to decide at what fare level such services should operate."

► **Skimming The Cream**—The four applicants plan to make money by serving only the best routes.

Air America states that its proposed route is the strongest that can be devised and that if there is a stronger one then Air America made a mistake in not finding it.

Here are the cities the four applicants would serve:

- **Air America:** New York, Washington, Pittsburgh, Cleveland, Detroit, Cincinnati, Chicago, St. Louis, Kansas City, Denver, Albuquerque, Salt Lake City, Los Angeles, San Francisco.

- **California Eastern:** New York, Philadelphia, Washington, Cleveland, Detroit, Chicago, St. Louis, Kansas City, Denver, Phoenix, Los Angeles, San Francisco.

- **Great Lakes:** New York, Philadelphia, Chicago, Los Angeles, San Francisco.

- **Trans-American:** New York, Philadelphia, Chicago, Los Angeles, San Francisco.

The present transcontinental routes of American, TWA and United are built around the same backbone of U.S. transcontinental traffic potential. That is the channel from New York via Chicago to Los Angeles and San Francisco.

Here are one-company westbound

services already available (eastbound flights are similar):

- **New York—Los Angeles:** total daily flights, 19; one stop, 9; two or three stops, 4; more than three stops, 6.

- **New York—San Francisco:** total daily flights, 11; one stop, 6; more than three stops, 5.

- **Philadelphia—Los Angeles:** total daily flights, 3; two or three stops, 1; more than three stops, 2.

- **Philadelphia—San Francisco:** total daily flights, 10; two or three stops, 4; more than three stops, 6.

- **Washington—Los Angeles:** total daily flights, 5; two or three stops, 1; more than three stops, 4.

- **Washington—San Francisco:** total daily flights, 6; one stop, 1; two or three stops, 2; more than three stops, 3.

- **Boston—Los Angeles:** total daily flights, 12; two or three stops, 7; more than three stops, 5.

- **Boston—San Francisco:** total daily flights, 3; two or three stops, 1; more than three stops, 2.

Existing transcontinental coach services are primarily those of American and Trans World. Utilization of these services this year over the 1700-2000-mi. routes shows a healthy growth in the summer.

Fares are around 4½ cents a mile. No accurate evaluation of the effect of fare on traffic volume is possible yet, Examiner Madden says.

► **Fare Effect**—One rather comprehensive attempt to measure the potential coach market's size was made by California Eastern, based on a correlation of Dr. Donald S. Watson of George Washington University. The method uses three factors: the gross national product, the fare, and the growth of public acceptance. The public acceptance growth rate is figured at a 17-percent annual increase.

Examiner Madden finds that estab-

Computed Coach Traffic Yield

Year	—Passenger Miles (000,000 omitted)—		
	5.76 cents fare	4 cents fare	3.775 cents fare
1949	7117	14,276	
1950	8301	17,165	
1951	9680	20,019	
1952	11,314	23,341	26,553
1953	13,160	27,216	30,962
1954	15,347	31,733	36,100

(Figures are based on correlation developed by Dr. Donald S. Watson, of George Washington University.)

lished carriers should have no higher costs on coach service than any new applicant would be likely to achieve. Direct cost of operating a plane should not vary much no matter what company operates it.

Lower direct operating cost figures put forth by Air America were traceable to a lower depreciation charge, he says.

As to ground cost and indirect cost, there is no exact way to allocate it. Generally, however, figures supplied by the intervenors in this case, and by CAB economic studies, showed costs not far off from the estimates of the applicants, when adjustments for cutting down on services are made.

And, the examiner points out, allowances must be made for a considerable degree of optimism in the estimates of Air America. For example, the applicant's salary scale is 19 percent under that of AA in some classifications; the number of flight crews is near the minimum that could operate the proposed schedules, leaving no leeway for sickness or vacation time. No allowance is made for delays on landings and take-offs and stacking time under instrument conditions; no allowance is made for possible maintenance costs at 11 of the 14 cities to be served; no costs are earmarked for a reservation system, but a feature of Air America's proposed service is a crossing of its two routes at Kansas City so passengers may transfer from one plane to the other there.

Concludes the examiner: "The record will not permit a finding that the applicants can operate the services they propose at a unit cost appreciably lower than the cost at which the presently certificated carriers could operate comparable services."

Northwest's 2-0-2s

Back in Operation

Complete fleet inspection of Northwest Airlines' 21 Martin 2-0-2s has "clearly shown that there are no structural deficiencies," says NWA President Croil Hunter.

The planes are back on scheduled op-

erations after the special inspection.

Northwest maintenance crews used the grounding period to make routine maintenance repairs. These maintenance checks would normally be accomplished at the next periodic overhaul time.

Pilot Pay

Mid-West part payment of wages by IOUs hit by CAB examiner.

Mid-West Airlines will have to pay its pilots the minimum wage scale all in cash—instead of partly in IOUs—and may have to produce \$14,915 in back pay, if the Civil Aeronautics Board follows the recommendation of Examiner J. Earl Cox.

The carrier has been paying its pilots less than the industry minimum and making up the difference with promissory notes pending a CAB decision as to whether full-scale salaries must be paid. This has been Mid-West's scale:

- **First 3 months' service:** minimum, \$300; maximum, \$350.
- **Second 3 months' service:** minimum, \$350; maximum, \$375.
- **After 6 months:** minimum, \$375; maximum, \$400.

These rates are for 70 hours flying, with additional hours paid "at the average rate per hour of the minimum rate for 70 hours flying."

► **Under Minimum**—This scale results in wages considerably under the minimum set in National Labor Relations Board Decision No. 83.

Section 401 (1) (1) of the Civil Aeronautics Act provides that pilots must be paid in conformance with that decision. Under the minimum pay formula, Mid-West pilots should have been getting around \$500 or more on the average. But their pay was running around \$350; they were underpaid by about \$150 a month. That's by a formula set up in the year 1934, when the cost of living was about half of what it is today.

The company, on Apr. 24, 1950,



EDO AIDS AIR RESCUE

United Nations pilots crossing the Korea Strait and operating over the Sea of Japan off Korea have had the assurance of the speediest possible rescue, thanks to new aircraft and equipment placed in use in that theater by Air Rescue Service.




Products designed and built by Edo play a prominent role in the latest equipment and techniques used by ARS to pick up survivors. Soon after the Korean war started, the first of more than one hundred A-3 life boats built by Edo were put into service in that theater. Carried under a B-29, the 30-foot Edo boats are dropped by parachute with complete equipment and supplies for 15 survivors and fuel to cruise well over 500 miles.



In service out of Japan also are the Air Rescue Service's big new SA-16A Albatross built by Grumman. The wing tip floats and mounting pedestals for this 30,000 pound twin-engined amphibian are built by Edo where, over a period of 25 years, many metal-working techniques were pioneered and where precision and fine workmanship have always been gauged by the highest standards.



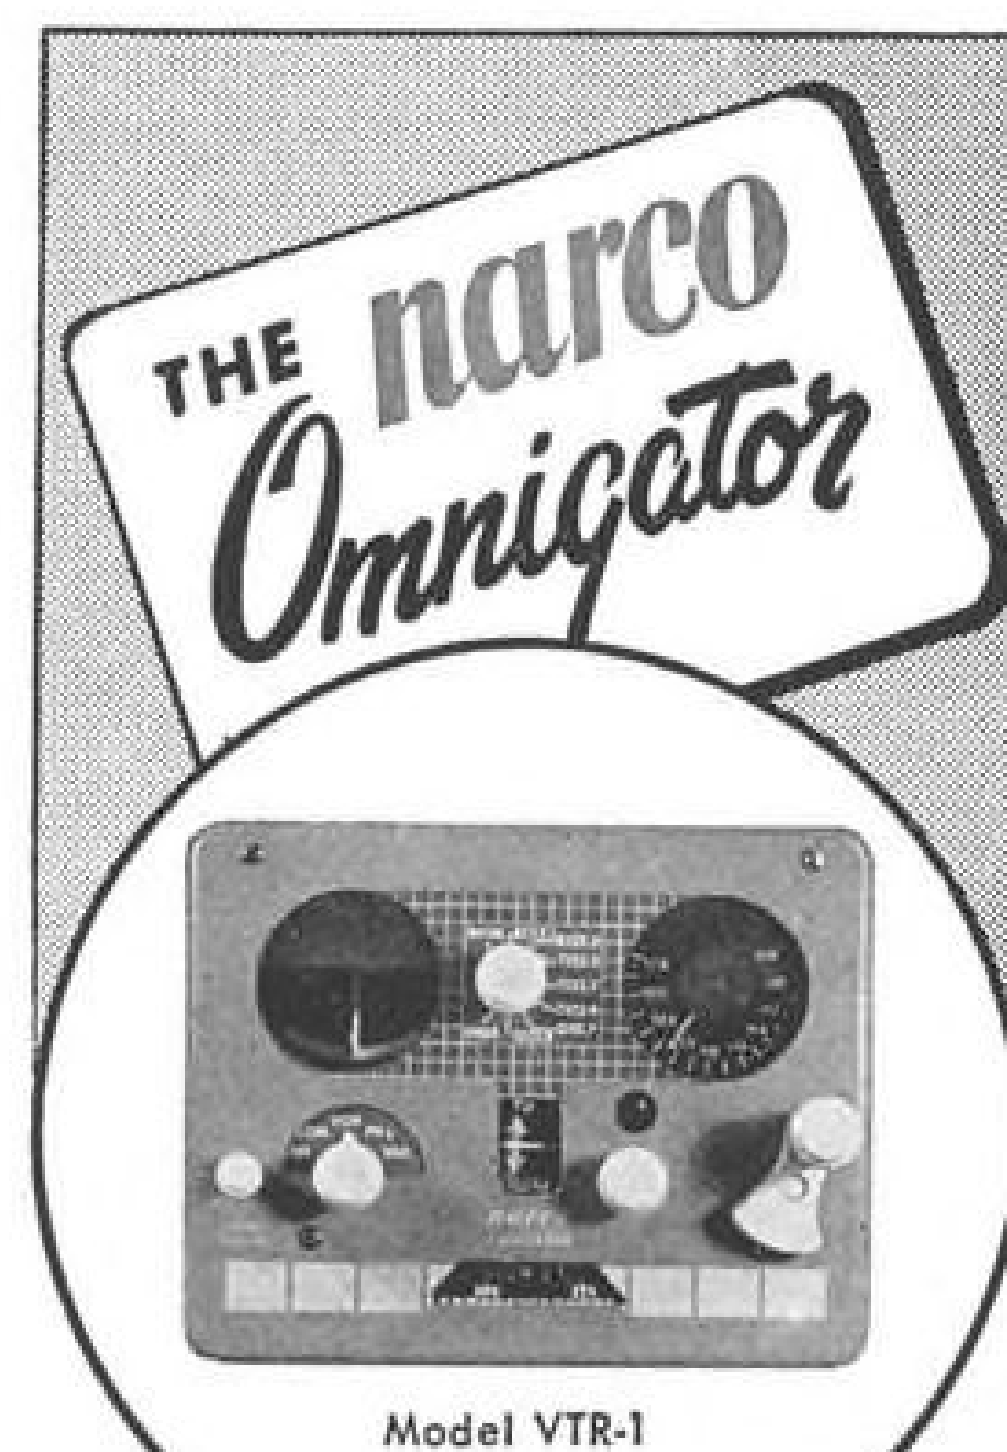

Model VTR-1

NEW OMNIGATOR is VHF at its very best! With all 7 VHF units in one richly styled panel, it only weighs 18½ lbs. The complete system includes: omni, two-way VHF radio, localizer, power supply & marker. **INVESTIGATE AND FLIGHT TEST TODAY!**

narco
NATIONAL AERONAUTICAL
CORPORATION
WINGS FIELD, AMBLER, PA.

asked the Board to exempt it from the requirement to pay minimum scale. But it has asked CAB for enough mail pay increase to pay its pilots the full scale prescribed in the Act.

► **IOUs for Balance**—Mid-West has kept a careful record of the balance it would have to pay the pilots to meet the proper scale. On Aug. 11, Mid-West agreed with the Air Line Pilots Assn. to issue promissory notes to the pilots, payable July 31, 1952. These notes cover all that is due pilots to bring their pay up to the minimum wage scale. The notes carry no interest until the due date.

Examiner Cox's opinion follows decision of the board to institute a proceeding "to determine whether or not Mid-West has violated the Civil Aeronautics Act."

Mid-West argues that the promissory notes covering the balance due each pilot put the company in full compliance with the requirements of the Act. And the company says the acceptance of these notes by the pilots constituted payment and is an acknowledgement by the pilots of settlement in full.

► **Examiner Rebuttal**—Examiner Cox says judicial interpretation of minimum wage statutes requires "the payment in cash or its equivalent of the prescribed minimum compensation."

And, Cox adds, "the legislative his-

tory of the Civil Aeronautics Act indicates an intent to provide a minimum wage as a simple matter of justice to men engaged in a highly skilled and inherently dangerous occupation, to bolster the national defense by attracting men of superior ability to the industry and to decrease the hazards of air transportation by relieving the minds of the pilots of any financial worry."

Cox says minimum wage or other compensation prescribed by welfare statutes must be paid employees in cash or by negotiable instrument payable at par, except as otherwise permitted by statute.

► **Notes Bear No Interest**—The trouble with the promissory notes Mid-West gives its pilots is that they are not negotiable at their face value. They bear no interest so a bank would discount the note, leaving the pilot with less than his due from Mid-West.

And the fact that the pilot has accepted the notes does not close the case. Cox cites several cases providing that: "in the absence of a bona fide dispute as to liability between an employer and employee, the employee cannot effectively waive his right to any part of the minimum wage prescribed by statute."

The examiner concludes that Mid-West has violated and is continuing to violate the provision of section 401 (1) (1) of the Act. This is contrary to the public interest and if permitted to continue "would or might lead to the breakdown of the statutory minimum wage by other air carriers."

CAB can order Mid-West to cease and desist from violation of the Act if this becomes advisable.

If the Board agrees with its examiner, Mid-West will have to pay its pilots the full minimum wage scale starting with the date of the order. On previous underpayments, the Board probably could not force Mid-West to pay the full minimum. The Board can suspend the line's certificate, or order it to cease and desist underpayment of its pilots. That is all. But the pilots could get the money through the courts.

Underpayment of pilots constitutes a theoretical threat to safety of airline operation, the Act implies. So the Board would appear to be under some obligation either to hasten the mail pay negotiations, or else suspend Mid-West's certificate.

Irish Profit Up

Aer Lingus, Irish Air Lines, made a profit of 115,000 pounds the first half of its fiscal year, up 27,000 pounds or about 25 percent over a year ago.

Total revenue of the line this past half has expanded 107,000 pounds—to 825,000 pounds. Expenditures rose only 75,000 pounds.

Aircraft Light Modifications Due

The aircraft lights now in use on airline planes are due for a change following tests at the Indianapolis Technical Development and Evaluation Center of Civil Aeronautics Administration. Lights for jet planes will be 500 times brighter than the present systems.

Present flasher systems on conventional planes should be changed to provide for flashing wingtip and fuselage lights at 80 flashes per minute. Flashes of red and white tail lights should be 40 per minute.

United Air Lines plans to modify its entire fleet to conform with this new standard, evaluated by Air Line Pilots Assn., Air Transport Assn., CAA and others.

High-intensity lights developed for jet planes are visible at 20 to 30 miles. This gives the pilots of 500-mph. planes at least the one-minute warning considered as a safe minimum. The lights CAA tested were supplied without cost by Thomson Corp., which developed them in accordance with CAA design recommendations. Testing and development will continue next year.

Another experimental high-intensity sweep-beam light has been developed by Luminator, Inc., of Chicago.

MCA Salesmen

Mid-Continent Airlines is using nine of its co-pilots as salesmen.

Faced with the prospect of furloughing the co-pilots, the line took this way of simultaneously boosting sales and keeping the pilots on the payroll.

The fliers wear their regular uniforms. They confine their solicitation to discussions of the company's flight operations and how these contribute to safety and schedule dependability.


Idea for the special use of pilots is credited jointly to Vice Presidents Jugh W. Coburn, traffic, and John A. Cunningham, operations.

EAL Resumes Dividend Policy

With payment of 25 cents a share Dec. 18, Eastern Air Lines resumes its former 50-cent annual dividend policy interrupted in 1947 by the industry slump.

President E. V. Rickenbacker says the 50-cent dividend is back again because "unsettled conditions have been substantially eliminated and the steady, healthy growth in gross revenues as well as net profits amply justify the resumption of dividends at this time."

Eastern has a \$40-million new equipment program underway. It includes 35

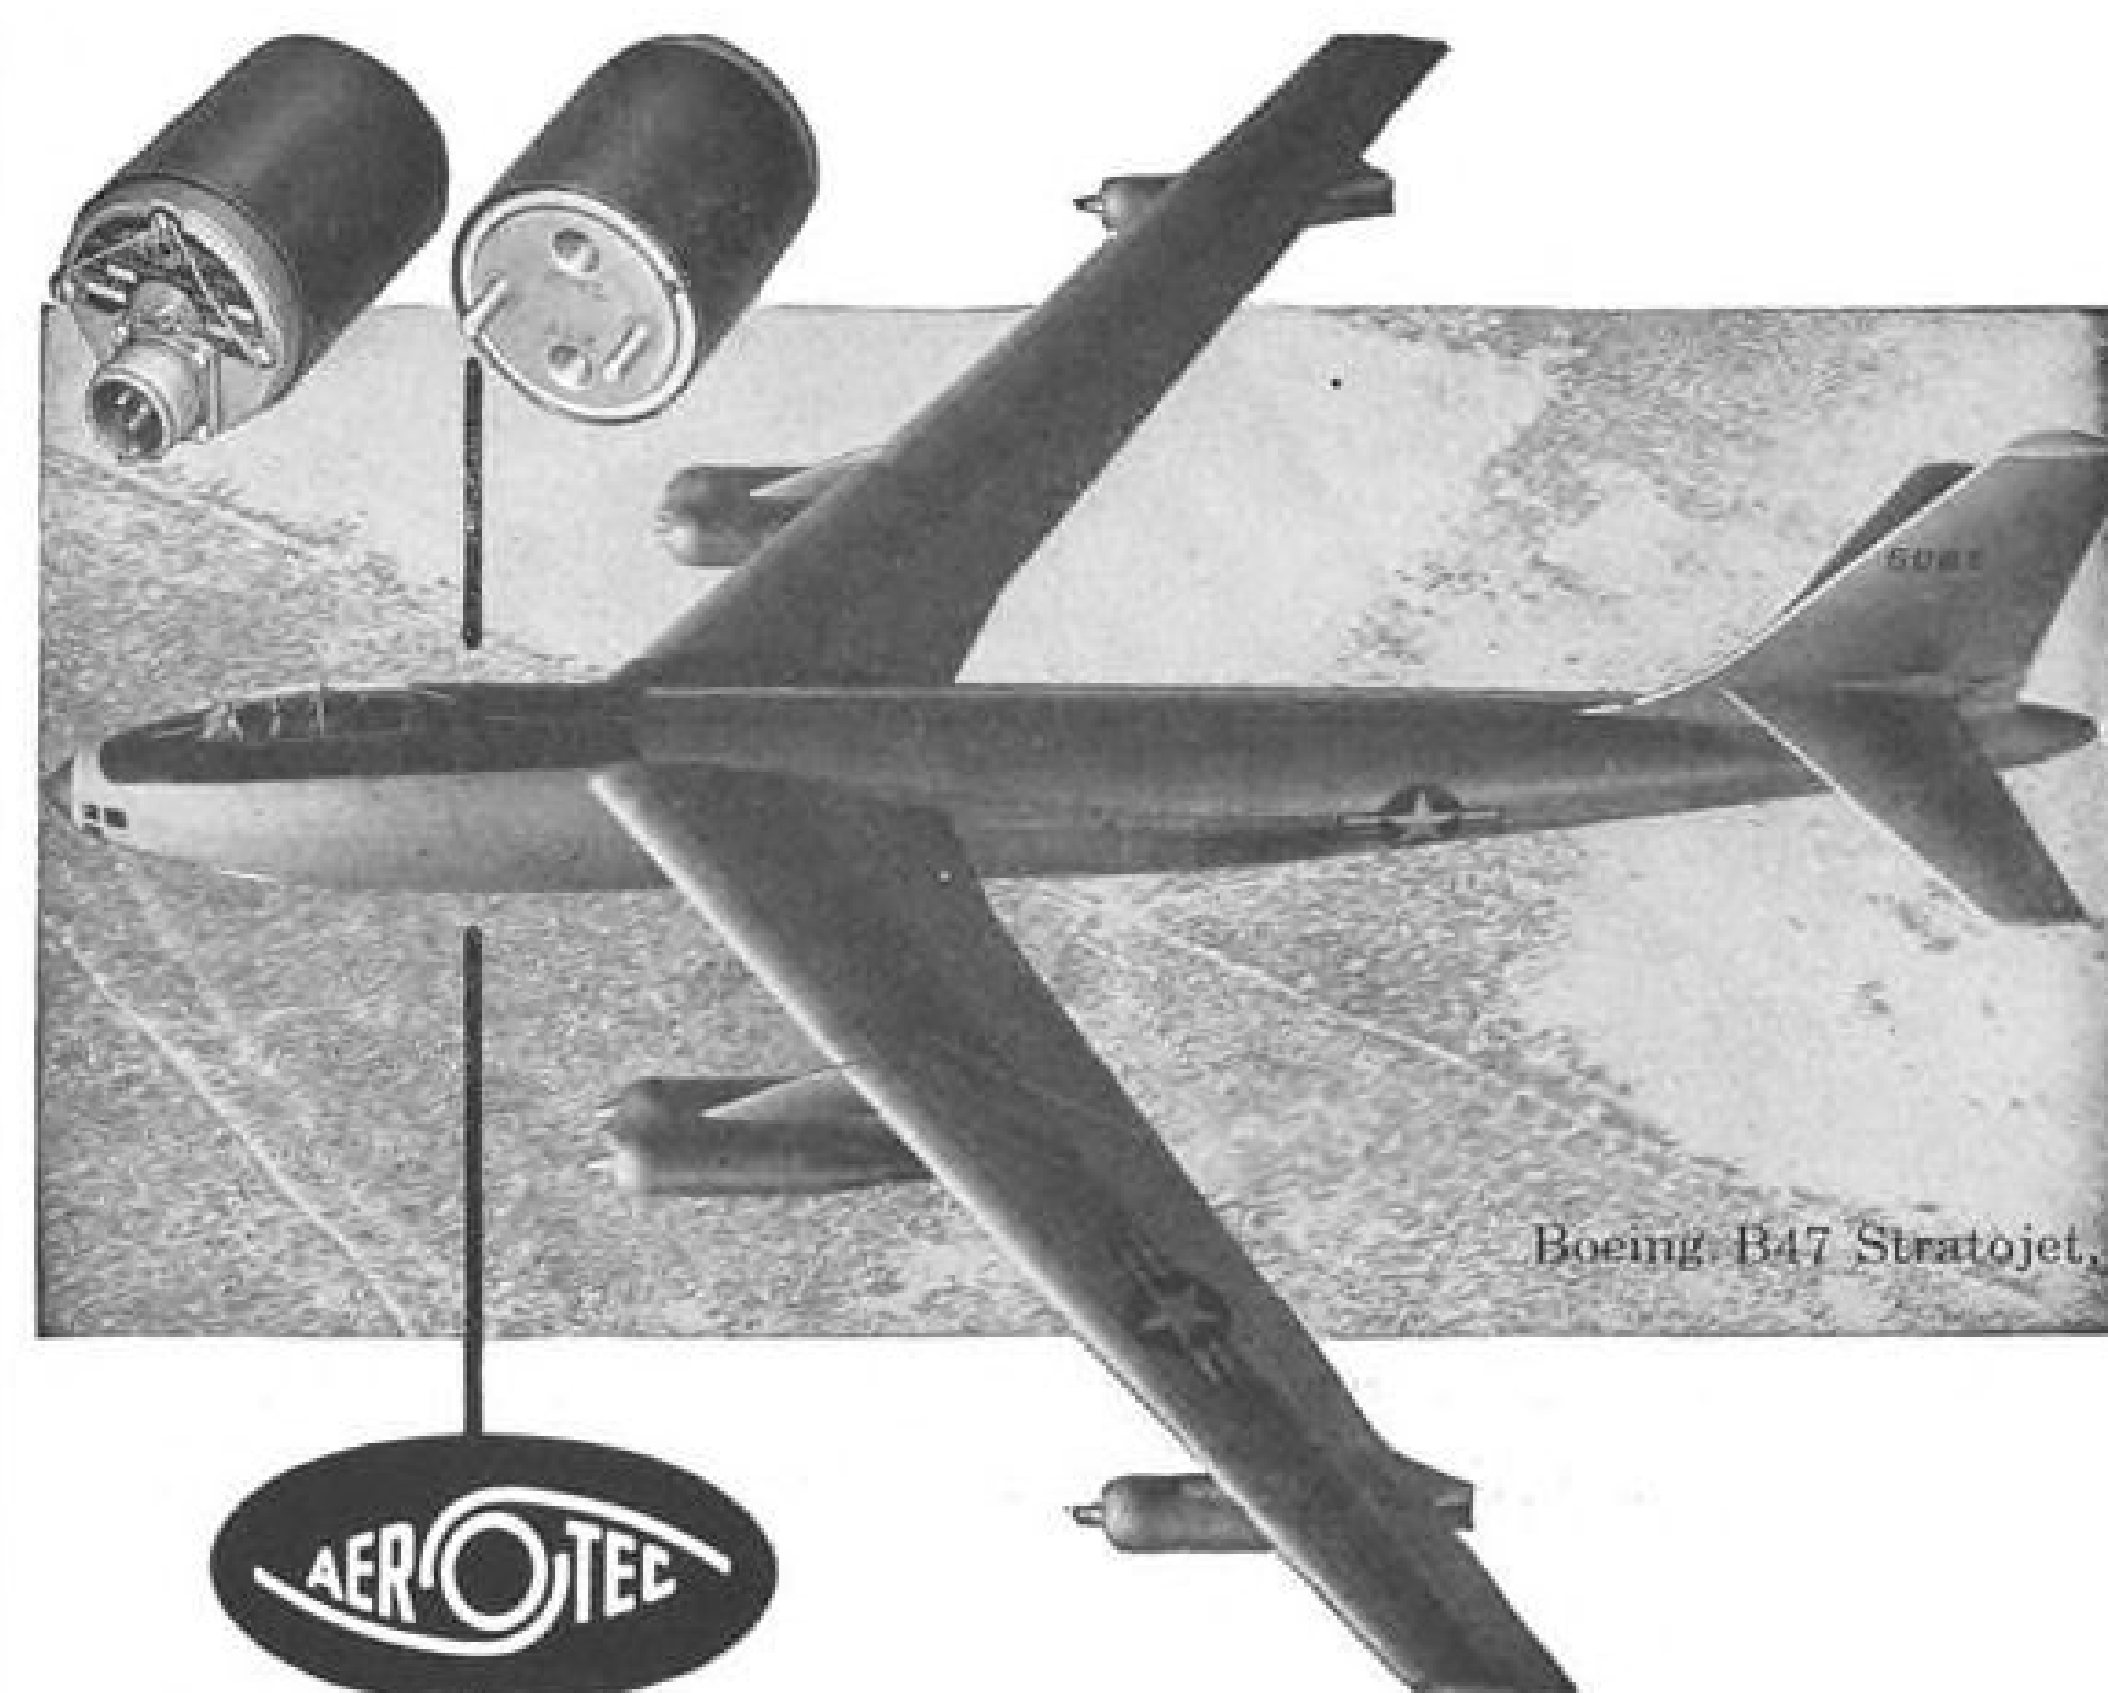

M818 DIFFERENTIAL PRESSURE SWITCH

Specified by Boeing

Engineers for the Boeing B47

Manufacturers like Boeing find Aerotec Pressure Switches built to exacting specifications for aircraft such as the B47 Stratojet, where performance qualifications are most demanding.

Now in production, Aerotec M-818 is vibration resistant up to 500 cps with 10 g's acceleration. It is capable of withstanding surge pressure of 120 psi., without change in setting. Rated for 28 volts DC, 3 amperes inductive, up to 45,000 feet.

All M800 series Aerotec switches are available for use with nitric acid, liquid oxygen, water, alcohol, octane and hydraulic fluids.

Thermix representatives, chosen for their engineering background and years of experience in the aircraft industry are ready to serve you and would welcome your inquiries.

Forsnas Engineering Co.
4545 W. 62nd St.
Los Angeles 43, Calif.

Lee & Freeman, Inc.
219 Central Bldg.
Seattle 4, Wash.

W. N. Wright
Box 7353
Dallas, Texas

Jay Engineering Co.
1517 E. Third St.
Dayton 3, Ohio

John S. Hammond, Jr.
1845 Grand Central
Terminal Bldg., N. Y.

Economy Equipment Co.
4526 Olive St.
St. Louis 8, Missouri

Project and Sales Engineers

THE THERMIX CORPORATION
Greenwich, Conn.

THE AEROTEC CORPORATION
GREENWICH CONNECTICUT

Designers and Manufacturers of Automatic Controls; Valves; Regulating, Reducing, Relief and Check Types; Pressure Switches; Gage, Altitude, Differential, Absolute Types; Float Switches; Top, bottom or side mounted.

a
Great Name
Carries On..

WARNER!

FOR years, the Aviation Industry has respected the name "Warner" in aircraft hydraulics.

Always it has meant quality and precision work of the highest calibre.

Now, reorganization has breathed new vitality into its research, management and production.


Warner is in the Aviation Industry to stay.

It continues as always to make its famed Hydraulic Valves.

Besides this new leadership, the only change is from the name Warner Aircraft Corp. to Warner Division, Clinton Machine Company.

You can expect even greater things from Warner—sound improvements, finer products—

Products worthy of carrying on the great name they bear!

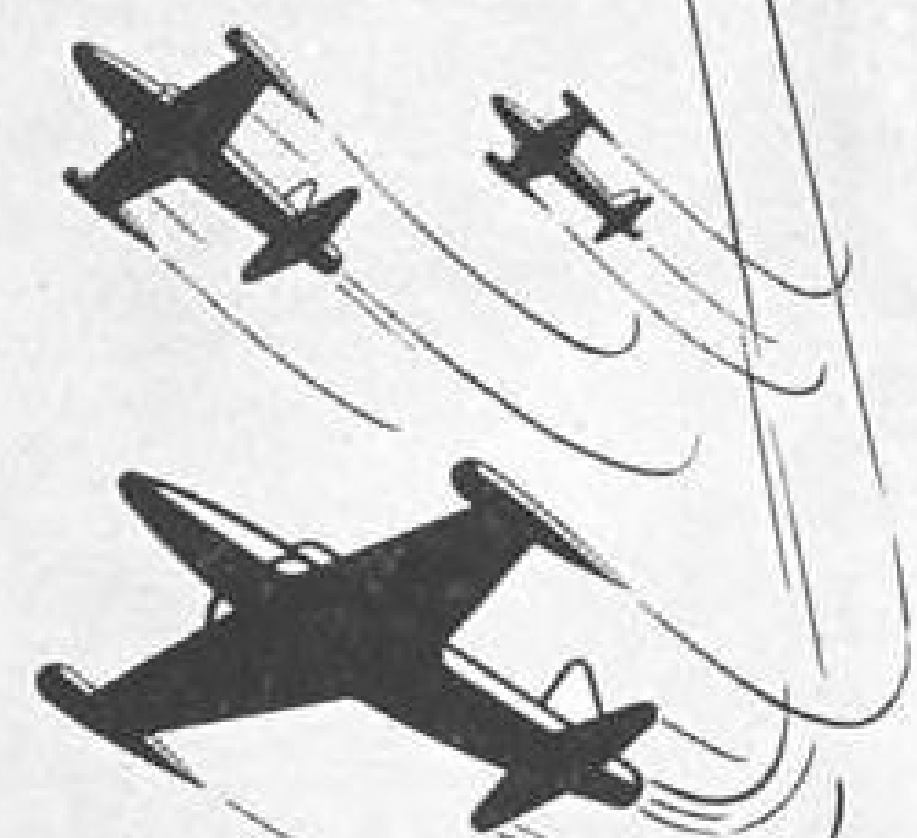

Warner
DIVISION
Clinton Machine Company

20263 Hoover Rd. • Detroit 5, Mich.

twin-engine 40-passenger Martin 4-0-4s to replace DC-3s; and 14 92-passenger Super Constellations on order for use on longhaul express flights. Delivery of both starts next summer and is scheduled for completion by the end of the same year.

This will give Eastern a 70-percent increase in seat-mile capacity, after sale of the present DC-3s from the fleet.

President Rickenbacker says the National rearmament program is giving air travel "substantial stimulus" and "a degree of stability which it has not enjoyed since the end of World War II."

Net earnings after adjustment for increased 1950 income tax the first nine months are 30 percent over 1949. And, says Rickenbacker, "indications point to a continuance of such an increase during the coming winter vacation season."

KLM Orders Super Connies

Keener competition for trans-Atlantic air passenger business is forecast as a result of Royal Dutch Airlines' order for a number of the new Super Constellation 1049Cs. The airline has announced officially that five of the big new transports have been ordered from Lockheed, although reliable sources have it that nine planes are involved in the deal. KLM expects to have the

1049C in service in 1952. Although no contract price has been given out, the basic Super Connie sells for approximately \$1.5 million plus spares.

The Dutch airline is having the planes fitted out for 66 passengers. A new pressurization system will maintain a sea level cabin pressure up to 12,500 ft. and 8000-ft. altitude up to 30,000 ft. Maximum cruise speed at maximum average weight will be 324 mph., and maximum speed at the same weight, 368 mph. KLM's Super Connies will have the new Wright Turbo-Cyclone compound engines which will permit considerable increases in payload or range. The 1049C is stressed to take turboprop engines when they become available commercially.

The new Super Connie is enjoying considerable popularity; at present Lockheed has orders for 50 from Eastern Air Lines, KLM, the Air Force and Navy. The first production plane is expected to fly next April.

American Orders Three More DC-6Bs

American Airlines is ordering three more 52-passenger DC-6Bs from Douglas Aircraft Co.

This brings American's DC-6B fleet on order to 14 planes. Total AA fleet will be 155 planes: 14 DC-6Bs, 45

standard DC-6s, 4 DC-6 air coaches, 79 Convair-Liners, and 13 DC-4 air-freighters.

Price of the new DC-6Bs, with spare parts, is about \$3.5 million. This brings total cost of the 14 DC-6Bs to about \$16.5 million. Douglas deliveries of DC-6Bs to American are scheduled to start in February.

Tiger's Freight Doubled Since June

Common carriage airfreight business of Flying Tiger Line has doubled since June 1, and the line made over half a million dollars net profit in the third quarter.

This, for a young airline without subsidy, makes the airfreight picture glow more invitingly than ever before though the Korea airlift is partly responsible.

It is especially significant at a time when top military and airline officials are trying to hatch a plan to set up a mammoth airfreight industry in this country (see AVIATION WEEK Nov. 27).

Here is the record of Flying Tiger Line this summer:

- Pacific airlift operations of Flying Tigers are with leased planes, so operating profit on this war job is all clear over and above regular operations.

- Foreign contract business has increased. The line is operating a large contract movement between Europe and Australia. This is under a firm commitment that will keep it busy until Jan. 1, and perhaps longer.

- Customer maintenance volume has increased considerably in the past few months. Flying Tiger is building a new hangar at its main base in Burbank. This will double present capacity. Prospects for increasing volume of customer service maintenance appear very good.

The company is busy seeking overhaul contracts from the military on World War II planes coming out of mothballs.

► **New Planes**—Flying Tiger bought 18 Air Force C-46Fs Sept. 30 for \$509,000. This will enable the line to release the planes it is now leasing from other firms.

It will make Flying Tiger the largest all-cargo fleet in the world, except military. For the past several months the line has been getting more business than it could handle with existing equipment.

There will be some expense in modifying and licensing the 18 new C-46s, but the planes have been little used since they were built for the military by Curtiss-Wright during the war.

► **Income Figures**—Operating profit of the Flying Tiger Line the third quarter was \$895,213 on total operating revenues of \$3,496,780.



MARTIN...

one of the 38
aircraft manufacturers
currently specifying

TINNERMAN
*Speed Nuts**

Because:

1. SPEED NUTS weigh less than any other self-locking aircraft fasteners.
2. They're easier to install.
3. They're easier to remove for servicing.
4. Provide greater resistance to vibration loosening.

Thousands of SPEED NUTS*, SPEED CLIPS*, and SPEED CLAMPS* are designed specifically for aircraft applications, and provide lower costs, increased production, and improved product quality. For more details, phone your Tinnerman representative—he's listed in major city directories. Tinnerman Products, Inc., Cleveland, Ohio. Distributor: Air Associates, Teterboro, N. J.

TINNERMAN



Speed Nuts
*Trade Mark Reg U S Pat Off.



FASTEST THING IN *Aircraft* FASTENINGS


SELECTED BY NORTHROP FOR THE
F-89 SCORPION



MODEL-431

Differential fuel pressure switch
to control automatic selection of fuel tanks

Unit designed to sense difference between two fluid or gas pressures. Meets applicable AMC environmental and qualification requirements. Explosion proof per USAF Spec. 41065-B. Other applications include installation across fuel filters to control alcohol deicer pump, to control fuel tank pressurization, and in jet engine fuel control systems.

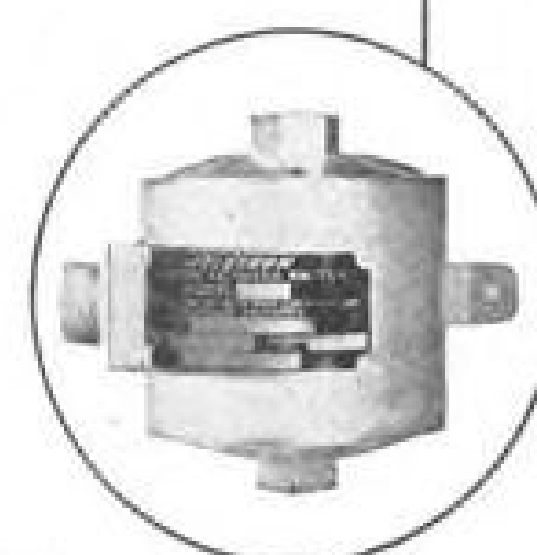


MELETRON

High pressure switches to 12,000 psi—Vacuum switches—
Differential pressure switches—Rotary selector switches—Solenoids.

Eastern representative—
Russell & Co., Bayshore, New York

950 N. Highland Avenue
Los Angeles, California

In Seattle—
J. M. Walthew Co., Boeing Field

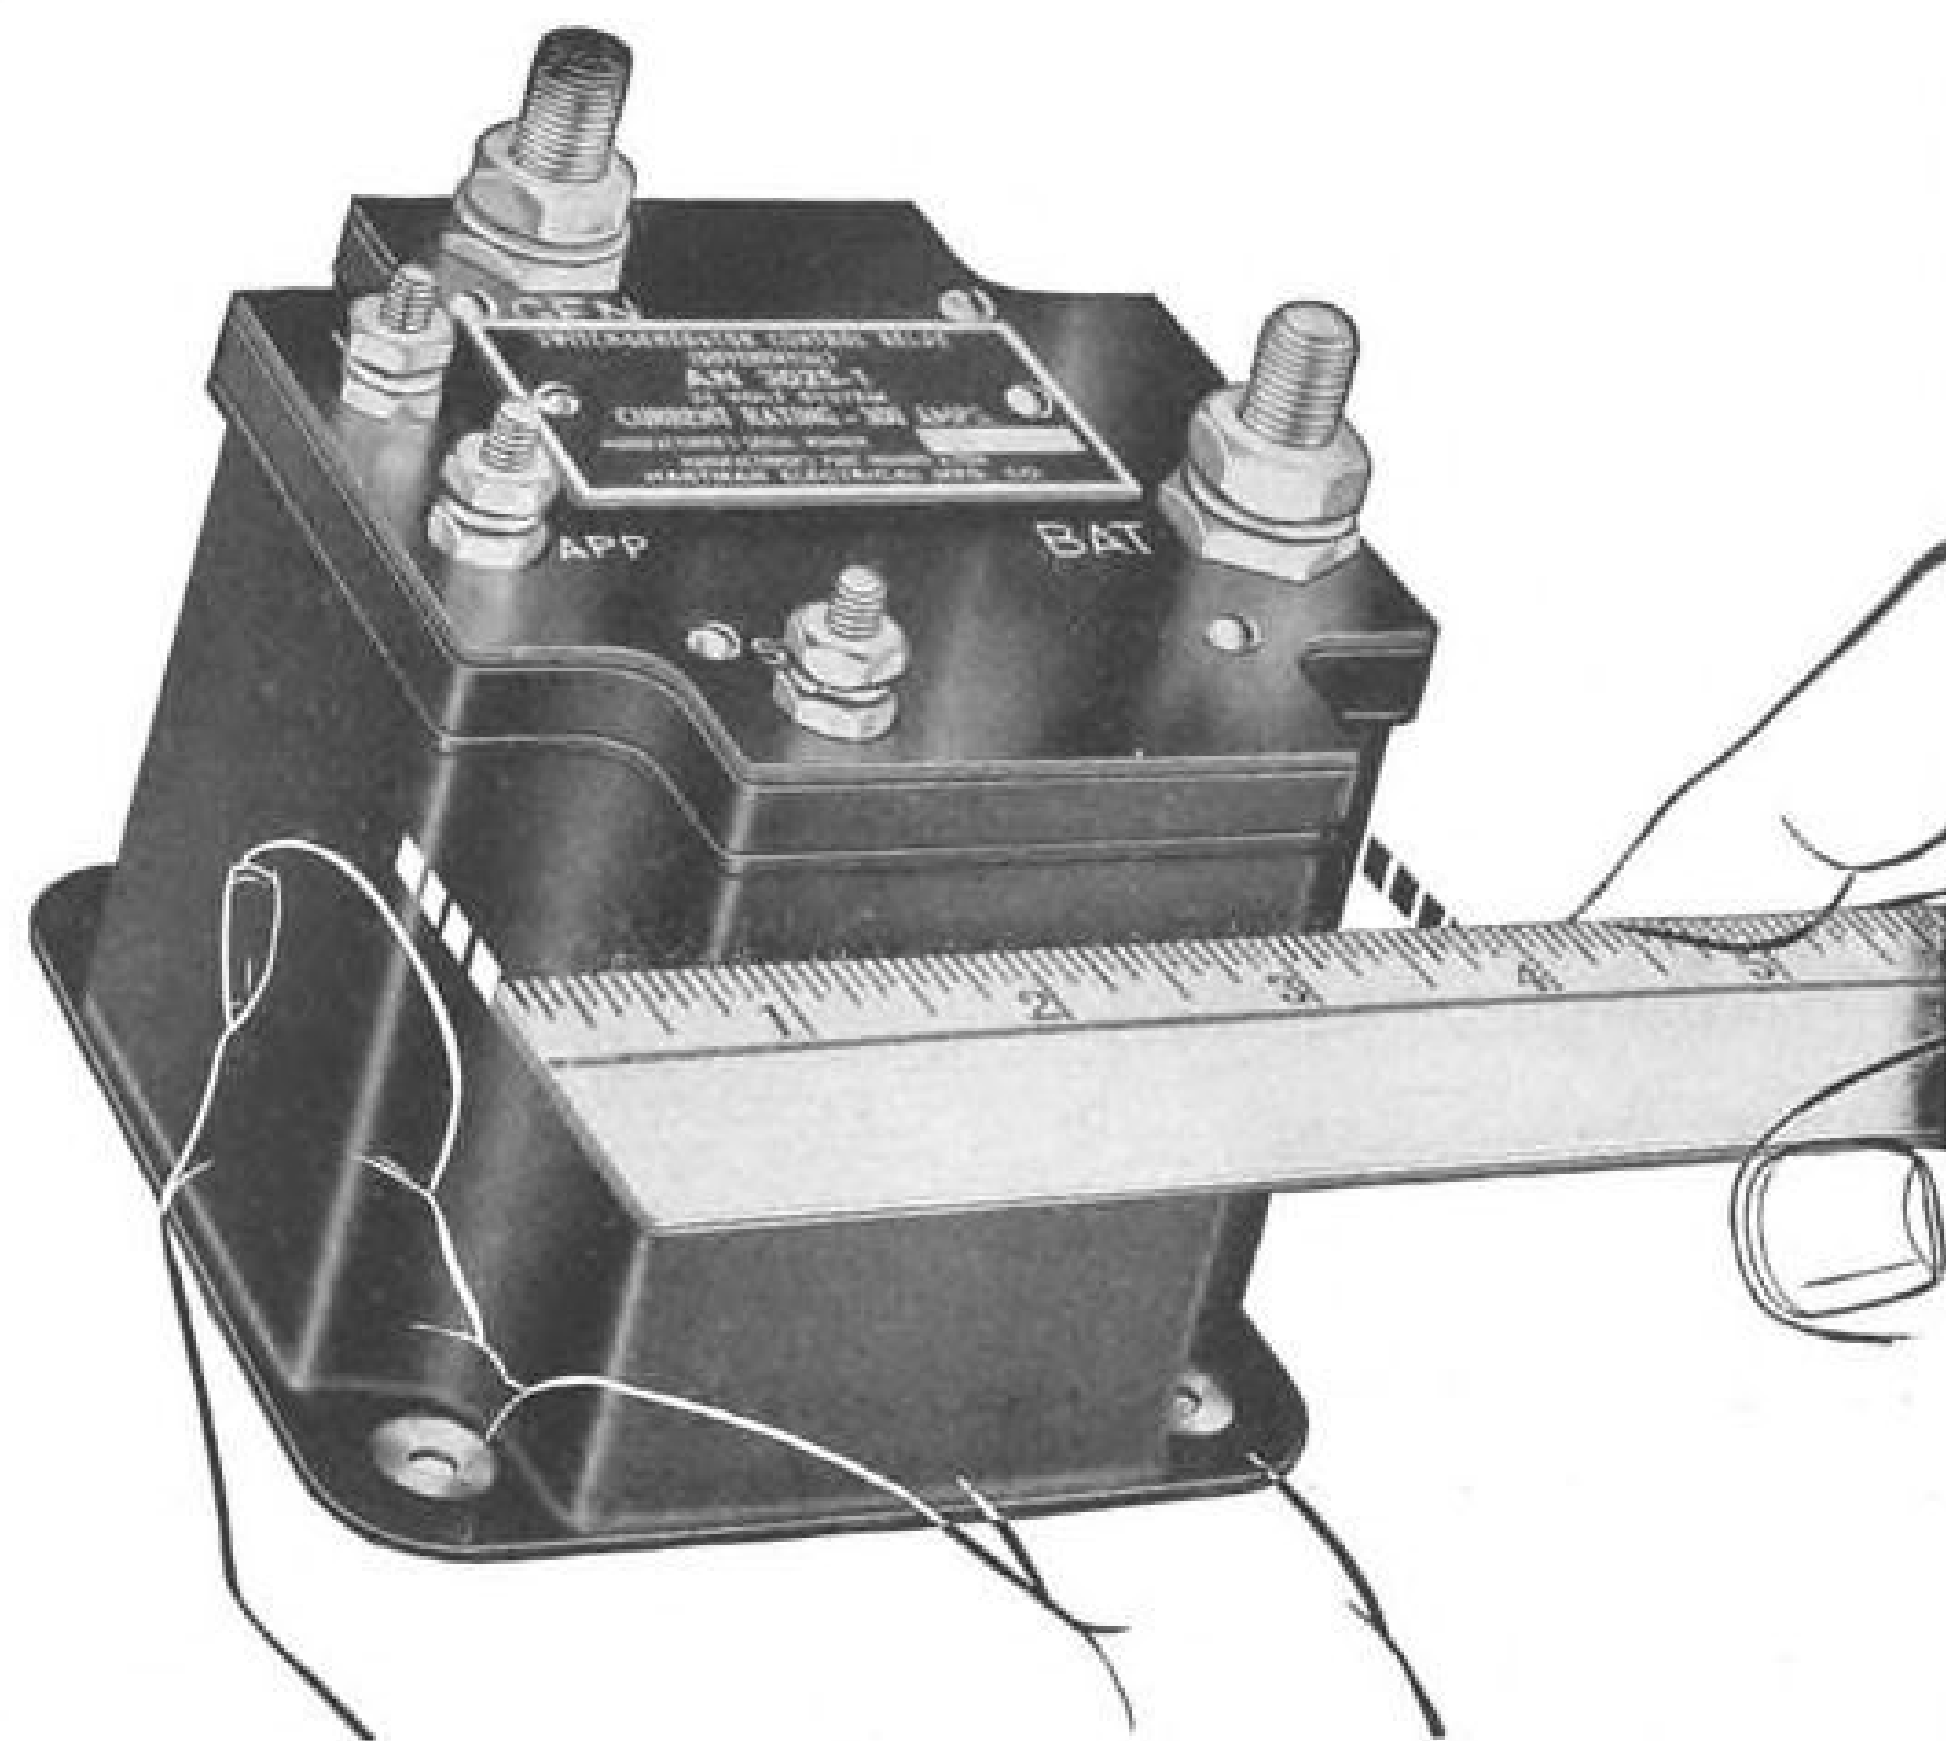

Measure of Acceptance

Superior performance within the same size and weight limits—this is just *one* of the reasons why Hartman A-700A* Reverse Current Cutouts have made obsolete the fixed voltage types formerly used . . . *why today they control more military and transport aircraft generators than do all other makes combined.*

Designed to close on differential voltage between generator and bus rather than at a fixed voltage, the A-700A cutout is *free from all contact flutter*. Troublesome rectifiers and current-draining ballast tubes have been eliminated. The A-700A cutout operates with any d-c generator up to 300 amps capacity having a normal regulated voltage of 28.5 volts. 600-amp* units also available.

**Manufactured to AN3025 (Spec. MIL-C-5026). Literature on request.*

the Hartman Electrical Mfg. co.
MANSFIELD, OHIO



600-AMP CUTOUTS



JET STARTER RELAYS



OVERVOLTAGE RELAYS

Operating expenses break down this way: flying, \$1,323,339; ground operations, \$414,529; maintenance, \$505,935; cost of service sales, \$93,421; traffic sales, advertising and publicity, \$84,392; general and administrative, \$129,524; depreciation and amortization, \$50,425.

Other deductions of \$48,354 and income taxes of \$256,700 leave a net profit of \$590,158.

Net worth (equity capital and surplus) of the company Sept. 30 was \$2,286,004. Working capital (current assets less current liabilities) came to \$1,185,289.

SHORTLINES

► **Braniff International Airways**—Company's net profit the first nine months of 1950 is triple last year's—\$768,952 compared with \$215,887. Load factors are running the highest since 1945. President T. E. Braniff says the full year may possibly be the best in history, even exceeding 1945. The late months of the year are best for Braniff, he says.

► **Bharat Airways, Ltd.**—Airline has extended its Far Eastern service from Bangkok to Singapore, using Douglas Skymasters. Planes leave Calcutta just before midnight on Fridays and return Sundays.

► **Capital Airlines**—Carrier's five newly acquired Constellations are running a load factor of over 58 percent, compared with less than 54 percent for Capital's regular-fare flights in other types (first 15 days November). Capital's Connie runs are: 3 roundtrips daily, Washington to Chicago, some stopping at Detroit; Washington-Minneapolis; New York-Chicago via Cleveland and Detroit; New York-Cleveland shuttle.

► **British Overseas Airways**—Company has not yet resumed New York-Bermuda service, due to equipment shortage. BOAC dropped the flight in March, saying the company had been losing half a million pounds sterling a year for several years.

► **Central Airlines**—Feeder is applying to CAB for seven more cities to serve: Junction City, Fort Riley, Manhattan and Topeka, Kan.; Falls City and Omaha, Neb., and Council Bluffs, Ia. Company already serves 25 cities in Texas, Oklahoma and Kansas.

► **Chicago & Southern Air Lines**—Carrier pays a 30-cent dividend Dec. 15. Net income the first ten months is \$650,818 or \$1.28 a share. This com-

pares with \$598,161 or \$1.17 a share a year ago.

► **Civil Aeronautics Board—CAB** has approved three Cuban air carriers for operation between Havana and Florida cities, for limited periods. The Board amended the foreign air carrier permit of Aerovias "Q" to transport persons, property and mail between Havana and Key West until Feb. 10, 1955, and between Havana and Tampa for three years. Compania Cubana de Aviacion has authorization between Havana and Miami to Apr. 4, 1954. The Board issued a new permit to Servicios Aereos allowing it to carry property and mail (no people) between Havana and St. Petersburg for three years.

► **Colonial Airlines**—Company has started its new schedule giving one-stop service between Washington and Ottawa. Time saving on this trip compared to the old schedule is 1 hr. 25 min. Intermediate stop is Syracuse, N. Y.

► **LAV**—The Venezuelan government airline plans a weekly roundtrip Mai-zuetia, Venezuela, to Lima, Peru, as soon as it gets landing rights from Peruvian government. Presently, the route is flown by the Peruvian-flag line Andes. Its route is via Panama with an overnight stop there. LAV would fly the route overland nonstop.

► **La Nica**—The Nicaraguan line (Lineas Aereas de Nicaragua) gets four planes with purchase of FANSA (Flota Aerea Nacional) for about \$285,000.

► **International Air Transport Assn.**—IATA reports international airline traffic continues on the upgrade, judged by August IATA clearing house volume of \$13,495,000—compared with \$12,649,000 a year ago . . . IATA is now reporting clearing house returns in terms of the \$2.80 pound, instead of the old \$4.03 rate.

► **International Civil Aviation Organization**—ICAO has held the second meeting of its Middle East Regional Air Navigation group at Istanbul. The group drew plans for long-range voice radio, which will allow any pilot to speak directly to the flight information centers at Karachi, Bombay, Teheran, Basra, Bahrain, Khartoum, Istanbul, Cairo, Cyprus and Athens. The meeting also drew plans for installation of Instrument Landing System (ILS) and Distance Measuring Equipment (DME) at many Middle East airports. ICAO has also extended use of high speed automatic tape relay equipment for flight plan clearance within a few minutes throughout the Middle East.

Bendix-Skinner

ORIGINATOR OF MICRONIC FILTRATION


the *Finest*

Defense Against Clogging and Wear



There can be no more demanding job for filters than in today's high speed, long range planes. That's why manufacturers and the U. S. A. F. turn to **Bendix-Skinner** filters. They know from past experience, as well as current operational records, that nine times out of ten **Bendix-Skinner** filters will supply the "finest" answer. Why not let **Bendix-Skinner** filters solve your problems too?

Over 350 Models providing filtration from 1/2 micron (.000019") upwards at flow rates from 1 to 5000 g.p.m.

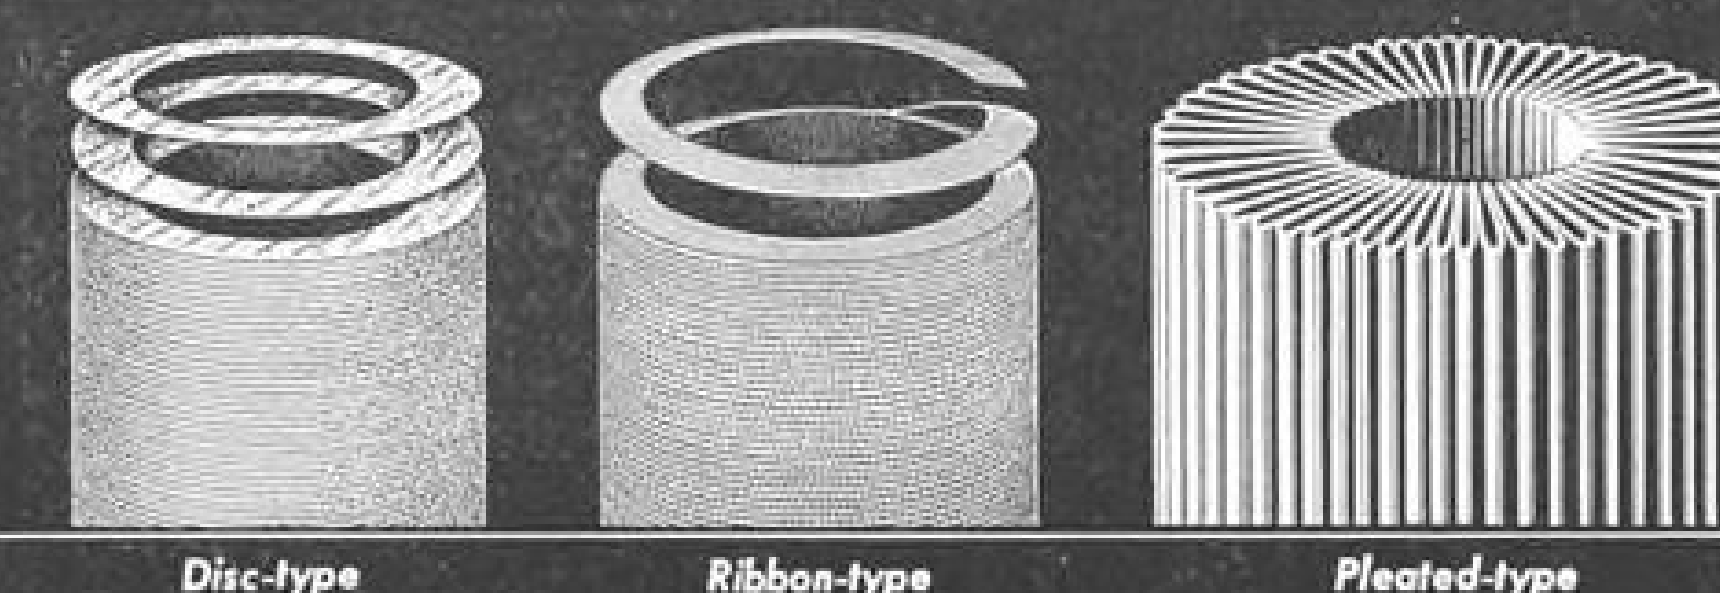

Disc-type

Ribbon-type

Pleated-type

SKINNER PURIFIERS DIVISION OF

1501 TROMBLY AVENUE, DETROIT 11, MICHIGAN


Export Sales: Bendix International Division, 72 Fifth Ave., N.Y. 11, N.Y.



AVIATION CORPORATION

WHERE TO BUY

SWITCH

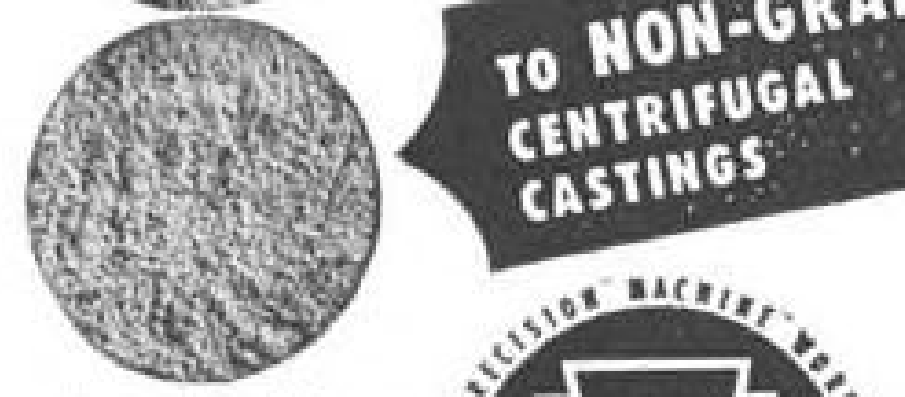FROM CASTINGS
LIKE THISTO NON-GRAN
CENTRIFUGAL
CASTINGS

Eliminate Porosity!
Improve Physical
Properties!
Request booklet,
American Non-Gran
Bronze Co.,
Berwyn, Pa.



TECO TE-200

THE
AIRLINE
SEAT!

A completely new concept of the ultimate in passenger comfort and safety! A modern airline seat with lower installation and maintenance costs! Write for Literature on Your Letterhead to: Dept. AW TRANSPORT EQUIPMENT COMPANY 2505 N. ONTARIO ST. • BURBANK, CALIF.

PROFESSIONAL SERVICES

GIVEN A. BREWER

Consulting Engineer

Electric Strain Gage Testing and Analysis
CAA Approved Aircraft Drop Test Equipment
Telephone New Bedford 3-9393 P. O. Box 664
New Bedford, Mass.

RICHARD A. HORD, A.B., M.S.

Professional Certificate in Meteorology
Licensed Pilot

Registered
Consulting Aeronautical Engineer
Blue Grass Field Lexington, Ky.

DANIEL R. RANNEY

Consulting Engineer

Aircraft Structural and Mechanical Development
437 Hamilton Street Albany, New York

SEARCHLIGHT SECTION

(Classified Advertising)

EMPLOYMENT:
BUSINESS:

"OPPORTUNITIES"

EQUIPMENT
USED OR RESALECHIEF
TEST PILOT

To assume responsibility for test flight operations of experimental military aircraft. Engineering background. Military service experience plus training at Air Force or Naval Test Pilot School desired.

Administrative ability required to direct staff of test pilots and maintain liaison with top level military personnel.

Send resume including breakdown of flight time in single engine, multi-engine, jet and piston powered aircraft to

Engineering Personnel Section

CHANCE VOUGHT AIRCRAFT

P. O. Box 5907
Dallas, TexasRESEARCH
ENGINEERS

with experience in application of mathematical and physical theory to the analysis of servo-mechanism systems as applied to aircraft.

also

ENGINEERS

experienced in FLUTTER ANALYSIS, calculating dynamic model requirements and correlating airplane and model data relative to flutter characteristics.

Send resume of training to
Engineering Personnel

NORTHROP AIRCRAFT, INC.
HAWTHORNE, CALIFORNIA

REPLIES (Box No.): Address to office nearest you
NEW YORK: 330 W. 42nd St. (18)
CHICAGO: 520 N. Michigan Ave. (11)
SAN FRANCISCO: 68 Post St. (4)

POSITIONS VACANT

SERVICE ENGINEER. Major instrument manufacturer has opening on West Coast for service engineer. Should have experience in gyros and electronics. Send complete information on experience, etc., in first letter. Reply to P-8249, Aviation Week.

PILOT, A.T.R. or Comm-Inst. Experienced in weather, executive-type flying and precision photographic work. Fixed base Ohio aerial mapping organization with intermittent transportation runs. State minimum salary expected. P-8318, Aviation Week.

POSITIONS WANTED

AIRPLANE CAPT., 6000 hours, DC-4 type rating, all pilot ratings land, sea. Schedule and non-schedule experience. No accidents. College graduate. Excellent ref. Two weeks necessary for present employer. PW-8182, Aviation Week.

A.T.R. PILOT receiving B.S. in M.E. degree in June—Veteran—desires training and employment as Engineering Test Pilot or similar position. Available for trial employment full time Jan. 1 to Mar. 31, 1951. Reply PW-8272, Aviation Week.

PILOT ENGINEER: Captain with transatlantic scheduled airline. M.S. Aeronautics. M.S. Physics. 8000 hrs. Strato-cruiser, Constellation, DC-4, Seaplanes. Former experience chief test pilot, design aerodynamicist. Desires change to responsible position flying on ground in So. Calif. area. PW-8222, Aviation Week.

PARKS COLLEGE of Aero Tech graduate, BS Degree in Aviation Maintenance Engineering, A and E license. School experience only. desire position in aviation, would prefer East Coast, will consider any offer. PW-8354, Aviation Week.

FOR SALE

DC-4 and DC-6 Airplane Parts, one lot 352 line items, 104,258 parts, current list price over \$240,000.00. For sale as one lot at 7% of current list price. All material new. Thomas Aviation Sales Company, P. O. Box 529, Sebring, Fla. Phones 5003 and 6821.

ENGINEERS NEEDED
IMMEDIATELY

Men with aircraft experience are needed in the Engineering Department of Chance Vought Aircraft, Dallas, Texas for work in the following classifications:

AERODYNAMIC ENGINEERS
STRUCTURAL DESIGN ENGINEERS
FLUTTER AND VIBRATIONS ENGINEERS
ANTENNAE DESIGN ENGINEERS
DESIGN DRAFTSMEN
CASTING AND FORGINGS ENGINEERS
POWER PLANT ANALYSTS
ELECTRONIC DEVELOPMENT ENGINEERS
AIRCRAFT INSTRUMENTATION ENGINEERS
STRUCTURAL TEST ENGINEERS
TECHNICAL ILLUSTRATORS
TECHNICAL WRITERS
HYDRAULIC TEST ENGINEERS
WEIGHTS ENGINEERS

Send resume of training and experience to
Engineering Personnel

CHANCE VOUGHT AIRCRAFT

Box 5907, Dallas, Texas

NEEDED IMMEDIATELY
IN TEXAS
INDUSTRIAL ENGINEERS
PROCEDURE &
SYSTEMS ENGINEERS

Must have a minimum of 3 years' experience in time standards and be fully qualified for development and coordination of procedures, methods, cost reduction, and layout.

Air mail detailed resume of your experience and qualifications, together with a recent photograph.

CONSOLIDATED VULTEE
AIRCRAFT CORPORATION
Fort Worth, Texas

STRESS ANALYST
with Aircraft Experience

Write, giving experience and
education to

SIKORSKY AIRCRAFT
Bridgeport 1, Connecticut

BELL AIRCRAFT CORPORATION

offers

ENGINEERING OPPORTUNITIES

in the

research—development—design

of

AIRPLANES—GUIDED MISSILES—HELICOPTERS

Openings in the East for

DESIGN CHECKERS
ELECTRONICS ENGINEERS
ELECTRO-MECHANICAL
DESIGNERS
ELECTRICAL DESIGNERS
AND DRAFTSMEN
ELECTRICAL DESIGN
COORDINATORS
ELECTRICAL EQUIPMENT
TEST ENGINEERS
ELECTRICAL SYSTEMS
TEST ENGINEERS
PRELIMINARY DESIGNERS

MECHANICAL DESIGNERS
AND DRAFTSMEN
ROCKET DEVELOPMENT
ENGINEERS
ROCKET MOTOR DESIGNERS
AND DRAFTSMEN
ROCKET MOTOR TEST
ENGINEERS
SERVOMECHANISMS
ENGINEERS
SPECIFICATION WRITERS
STRUCTURES ENGINEERS
WEIGHTS ENGINEERS

Address: Manager, Engineering Personnel

BELL AIRCRAFT CORPORATION

P. O. Box 1, Buffalo 5, New York

Openings in the West for

ELECTRONICS ENGINEERS
SERVOMECHANISMS ENGINEERS
ROCKET TEST ENGINEERS

ELECTRONICS TECHNICIANS
SERVOMECHANISMS TECHNICIANS
ROCKET MECHANICS

Rocket or Missile experience desired

Address: Field Test Director

BELL AIRCRAFT CORPORATION


P. O. Box 391, Holloman Air Force Base, New Mexico

we've SPOILED
our Customers!Gleason No. 18 Hypoid
Formate Grinder

WHERE CUSTOMERS . . .
NOT MACHINES . . .
COME BACK!

We've built our business on quality, and OUR customers expect and receive the finest tools available. Our stock is large and diversified; it includes equipment such as these: five Gleason No. 18 Hypoid Formate Grinders, for spiral, zero and hypoid bevel gears. Maximum cone distance 12 7/8". Greatest pitch diameter 24". Coarsest diametral pitch 2 D.P. complete. New in 1948—LIKE NEW. 1/3 of new price. A rare buy—even as stand-by's!

Tools
LAURENS BROS., INC.
Machine 2780 Highland Ave., Norwood
Cincinnati 12, Ohio

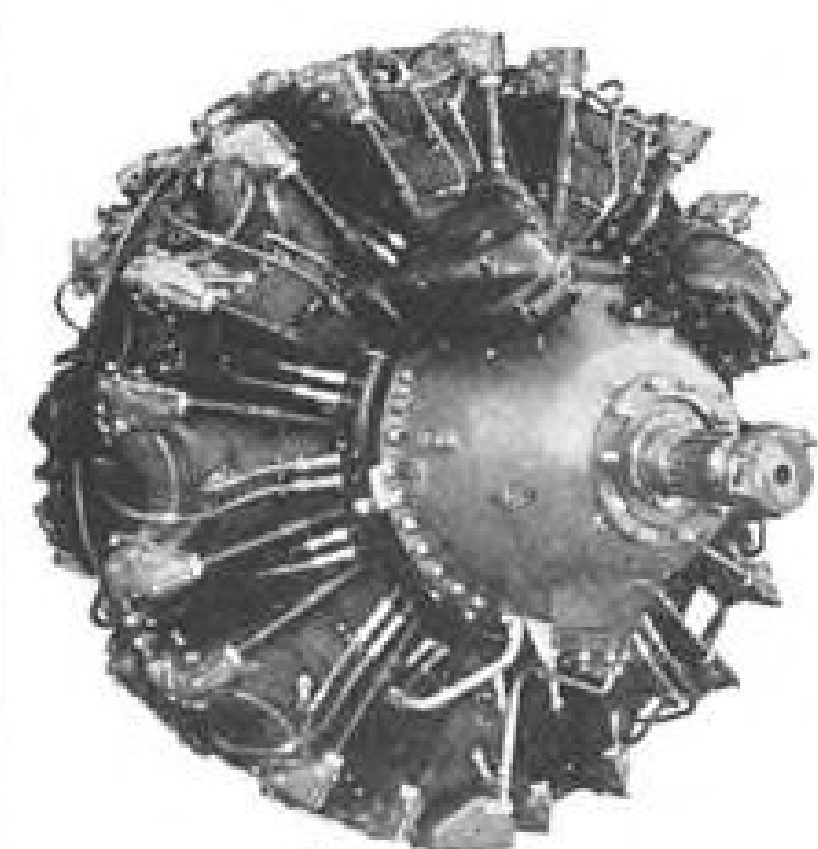

R-2800-75^s

price \$2500.00

These engines are 00:00 time since factory new and have had ACES C.A.A. approved outside in lubrication system blower to thrust plates incorporated. They have also been block tested in our modern test cells and have been prepared for long term storage.

New—R1340-AN-1 Ignition Harness, complete with cable, "7-mm" \$100.00 per set.

C.A.A. APPROVED OVERHAULS

- R-1830-92 without exchange.....\$2,500.00
- Above with exchange.....\$2,290.00
- R-1830-65-92 Conv. less carb.....\$1,850.00

All Engines Complete with Form 60-B

ALL WORK AND ENGINE SALES CARRY OUR 100 hr. WARRANTY

AIR CARRIER ENGINE SERVICE, Inc.

C.A.A. Approved Repair Station No. 3604
Intl. Airport Branch
P. O. Box 37, Miami, Florida
Cable "ACENGSR"



AIRPLANES

"Finest Quality Executive and Transport Aircraft"

GRUMMAN "WIDGEON"—Low Time—\$9,500

PBY-5A—Licensed, New Fabric, Mod. Tail—\$28,500

2—LODESTAR—"Executive"—\$29,500 and \$45,000

—Will Accept BONANZA or NAVION In Trade—

ENGINES—ACCESSORIES—PARTS—SUPPLIES

CENTRAL PURCHASING AGENCY, INC.

Located At: Hangar #1 - International Airport

Write: P. O. Box 126, International Airport Branch

Phone: 88-5298 - MIAMI, FLA.

CHIEF TOOL ENGINEER

To assume direction of Tool Engineering and Tool Manufacturing Department of 600 to 700 employees engaged in tool research, planning, design, fabrication and record control for tooling programs connected with the production of military aircraft. Minimum of fifteen years' technical background with administrative experience in large organization required. Must be capable of assuming full responsibility for tooling methods, procedures, costs and maintenance of schedules. Send resume to

Personnel Manager

CHANCE VOUGHT AIRCRAFT

P. O. BOX 5907
DALLAS, TEXAS

FOR SALE EXECUTIVE TYPE B-17G

WILL CARRY 26 PLUS CREW. INTERIOR FINISH STRICTLY PLUSH. HAS HAD A-1 MAINTENANCE SINCE NEW

MISSIONARY FLIGHTS
434 West Pacific
Springfield, Mo.

COMPANY OWNED CESSNA—195
55 hours on engine since major. 1000 hours
airframe time. Licensed until October,
1951. Primary blind instruments. Gyro,
2 receivers, ARC, VHF transmitters.
ADF. Always flown by company pilot.
BOWERS BATTERY & SPARK PLUG CO.
Box 1262, Reading, Pa.
Phone Reading-Laureldale 9771

AVAILABLE IN CHICAGO

Complete Aircraft Manufacturing Facilities.
Specialties: Welded Assemblies, Sheet Metal
Fabrication, Precision Wood Work.
25 years Aircraft Manufacturing experience.
5 years Helicopter Research.
Complete engineering staff.
CW-8290, Aviation Week
520 N. Michigan Ave., Chicago 11, Ill.

Rising Sun SCHOOL OF
AERONAUTICS
ESTABLISHED 1930
"Built Upon the Success of its Graduates"
GOVT. C. A. A. and VETERANS APPROVED
ENROLL NOW FOR NEXT CLASS
Write for Illustrated Catalog.
2206-16 E. HUNTINGTON ST., PHILA., PA.

new and used DC-3 and DC-4 parts, equipment and accessories! at below cost!

DC-3, DC-4, and P. & W. R-1830 and P. & W. R-2000 parts, accessories and components; also newly overhauled P. & W. 1830-92 and R-2000-11C engines and quick change units, contact:

Surplus Sales Representative, United Air Lines Maintenance Base, Bayshore Highway, South San Francisco, Calif. Telephone JUno 8-2424.

Prompt delivery. Guaranteed to be as represented.

For a complete list of all parts, write to above address. Send us your requests for quotations.

UNITED AIR LINES

AIRCRAFT & ELECTRONIC EQUIPMENT

As a leading supplier we offer a complete line of

BRAND NEW INSTRUMENTS

- FLIGHT & NAVIGATION INSTRUMENTS
- ENGINE INSTRUMENTS
- AUTOMATIC PILOTS
- INVERTERS
- AUTOSYNS
- PRECISION AUTOSYNS
- RATE GENERATORS
- SYNCHROS
- ALNICO FIELD MOTORS
- GYROS
- A.C. MOTORS
- D.C. MOTORS
- SERVO MOTORS
- TORQUE UNITS
- TORQUE AMPLIFIERS
- FREQUENCY METERS
- BLOWER ASSEMBLIES

Write for complete listings

All Instruments May Be Purchased
C.A.A. Certified

U. S. Export License-2140

WUX Great Neck, N. Y.

INSTRUMENT ASSOCIATES
37 E. Bayview Ave., Great Neck, N. Y.
Tele: Great Neck 4-1147

RELAYS B4-B8

Various makes — unused — packaged
wholesale 45c. up. List available.

GEORGE A. BUCHANAN
Rm 12—232 W. 1st St. Reno, Nev.

AIRCRAFT ENGINES and component parts



This is probably the world's largest inventory of aircraft engines and airframe parts. All new and overhauled engines and parts are warranted by us and are C.A.A. certified. This is your assurance of top quality at our low prices. We invite your inquiry... and inspection of our facilities including C.A.A. approved engine and accessory overhaul shops.

Special

Ten Pratt-Whitney R-1830-92 Engines, less than 23 total hours since new, newly major overhauled — air carrier, with complete accessories, meeting your requirements, pickled and preserved for long-time storage, domestic or export packed, \$2,500.00 each.

Attractive new low prices!

PRATT AND WHITNEY		CONTINENTAL	
R-985-AN-3	(E*)	0-170-3	(NE)
R-1340-AN-1	(*)	R-670-4-5-11	(NE)
R-1830-92	(N*)		
R-1830-43-65-67-90C-90D	(E*)	LYCOMING	
R-2000-7	(*)	0-435-1	(E*)
R-2800-31-43-51-79	(E*)	R-680-8-9-13-17	(NE)
WRIGHT		JACOBS	
R-975-11-28	(E)	R-755-9	(E)
R-1820-59WA-71-87-97-G102A-G205A	(E)	RANGER	
R-2600-29	(N)	L-440-1	(E*)
R-3350-19A-35A	(NE)	6-440-CS	(NE)

(N) ... New (unused) (E) ... NTSO (Army or Navy Major)

(*) ... Newly overhauled in our C.A.A. approved engine shops and warranted

Check this list of air frame parts

Large stocks of parts for the following aircraft:

- ☐ C-54, DC-4, C-47, DC-3, A-20, A-26, B-26, B-25, F-51, T-6, F-47, F-63, F-38, C-46, C-45, AT-7, AT-11, C-18S, C-43, D-17S.
- ☐ Pratt-Whitney and Wright Engine Parts and Overhaul Tools.
- ☐ Hamilton Standard Propellers and Overhaul Tools.
- ☐ Curtis Electric Propellers and Overhaul Tools.
- ☐ Instruments and Instrument Parts.
- ☐ Hangar and Maintenance Equipment.

COMPLETE LISTINGS AVAILABLE ON REQUEST

PHONE, WIRE, OR WRITE TODAY FOR QUANTITIES AND LOW PRICES

PAGE AIRCRAFT INDUSTRIES

CIMARRON FIELD • BOX 535 • OKLAHOMA CITY, OKLAHOMA, USA

C.A.A. approved Engine Overhaul and Repair Station No. 3808

C-46

Spare Parts Components Accessories Hydraulics Ignition Systems

ENGINES

R-2800, R-1830, R-1340, R-985, V-1710, V-1650 Many Series

PROPELLERS

23E50-505-6507A0 for C-54

WRIGHT

Overhaul Parts for R-1820 Series

Charles E. Mathews & Cia., Inc.
Bldg. 802 P. O. Box 822
INTERNATIONAL AIRPORT
MIAMI 48, FLA.

P&W R-2000 MASTER ROD ASSEMBLIES

consisting of:
51895 Master Rod
43658 Link Rods
84814 Bearing Assembly,
knuckle pins, bolts
and nuts.

Removed from zero time engines. Condition excellent.
Other R-2000 parts, new and used, CAA Certified.

Foreign Inquiries Invited

MORCO TRADING CORPORATION

212 SOUTH ROBERTSON BOULEVARD
BEVERLY HILLS, CALIFORNIA, USA
CABLES: "MORCO" BEVERLYHILLS
Exporters of Aircraft Parts

TWA TWA TWA TWA TWA TWA TWA TWA

Save on air travel with
TWA
Family Half-Fare Plan

You pay one full plane fare — only one-half fare for each other family member. (Husband or wife, children over 2 and under 22.) On Mon., Tues., Wed., in the U. S.

CALL TRANS WORLD AIRLINES

Across the U.S. and overseas... you can depend on **TWA**

TWA TWA TWA TWA TWA TWA TWA TWA

Where can you use INCONEL?

It's a metal to use when operating temperatures are high... up to 2000°F.

It's stronger and harder than structural steel.

It has excellent resistance to corrosion and destructive oxidation.

You can weld it, machine it, form it, solder it.

They're using Inconel® in jet engines, gas turbines, exhaust systems, insulating blankets.

Find out how and where you can use Inconel to best advantage by writing for T-7, "Engineering Properties of Inconel."

THE INTERNATIONAL NICKEL COMPANY, INC.
67 Wall Street, New York 5, N. Y.

INCONEL...
FOR LONG LIFE
AT HIGH TEMPERATURES

LEWIS THERMOCOUPLES FOR ENGINE TEMPERATURES



We specialize in the manufacture of all types of aircraft thermocouples, lead wire, firewall blocks and lead-resistor blocks. We are equipped to fabricate jet engine thermocouple-harness assemblies, connecting-lead assemblies and special connector blocks to your specifications. Bring your temperature measuring problem to us, whether it is a new thermocouple, harness or connecting lead, we are at your service.

THE LEWIS ENGINEERING CO.
CHURCH ST. • • • • NAUGATUCK, CONN.

WHAT'S NEW

New Dictionary

The expanding engineering market in South America has created engineering vocabulary problems, but fortunately, there is a basic engineering dictionary to help solve these problems.

Louis A. Robb, a civil engineer, has compiled and recorded technically correct engineering terms in Spanish and English. The published result is the **Engineers' Dictionary (Spanish-English and English-Spanish)** available from John Wiley & Sons, Inc.

As could be expected from the editor's background, the parent fields of engineering—civil, mechanical and electrical—are heavily covered. Television nomenclature receives a lot of attention—but words and terms like jet propulsion, turbojet and aileron are missing.

The dictionary does not have thumb-indexing.

Engineer's Dictionary is published by John Wiley & Sons, Inc., 440 Fourth Ave., New York 16. Price is \$12.50.

High Society

First branch of the Society of Licensed Aircraft Engineers in North America has been organized at Gander Airport, Newfoundland, under the chairmanship of Robert Walsh.

SLAE's purpose is to provide an exchange of information between members on international airline planes and problems, and to disseminate members' experiences to manufacturers and operators. SLAE is established in 26 countries. Inquiries can be addressed to M. Staple, Publicity Manager, Society of Licensed Aircraft Engineers, Gander Airport, Gander, Newfoundland.

New Addresses

Adel division, General Metals Corp., aircraft and industrial hydraulic valve equipment maker, has opened new offices in the New York area in the Stevens Bldg., 42 Third Ave., Mineola, Long Island. The firm's previous offices at Stamford, Conn., have been closed. Perry Barker, Adel's eastern representative, heads the Mineola office. E. M. Storer, Jr., previously with Glenn L. Martin Co., has joined Adel as a sales engineer.

Steiner Plastics Manufacturing Co., Inc., is moving to a new plant at Pratt Oval, Glen Cove, Long Island, N. Y. The move will give Steiner production space of 75,000 sq. ft. Present office at 47-30 33d St., Long Island City, will be maintained until the end of 1951.

ADVERTISERS IN THIS ISSUE

AVIATION WEEK—DECEMBER 4, 1950

Aerotec Corporation, The.....	47	Remington Rand, Inc.	34
Agency—Hening & Co., Inc.		Agency—Leeferd Adv. Agency, Inc.	
Airborne Accessories Corp.	7	Rumph Company, Dave.....	46
Agency—Lewis Advertising Agency		Agency—Kimball Adv. Agency	
Airwork Corporation	26	Searchlight Section	52, 53, 54, 55
Agency—J. Branch Briggs Adv.		Skinner Purifier Div. of Bendix Aviation Corp.	51
American Non-Gran Bronze Co.....	52	Agency—MacManus, John & Adams, Inc.	
Agency—Norman P. Hewitt Adv.		Switlik Parachute Co., Inc.....	Second Cover
Auburn Spark Plug Co., Inc.	4	Agency—J. Branch Briggs Adv.	
Agency—Spitz & Webb Adv.		Tinnerman Products, Inc.	49
Bell Aircraft Corp.	32	Agency—Meldrum & Fewsmith, Inc.	
Agency—Comstock, Duffes & Co.		Torrington Co., The	41
Boeing Airplane Company.....	36	Agency—Hazard Adv. Co.	
Agency—N. W. Ayer & Son, Inc.		Transcontinental & Western Air, Inc.....	56
Cannon Electric Development Co.	27	Agency—Batten, Barton, Durstine & Osborn, Inc.	
Agency—Dana Jones Company		Transport Equipment Company.....	52
Champion Spark Plug Co.	19	Agency—Jaycraft Company	
Agency—MacManus, John & Adams, Inc.		Warner Div., Clinton Machine Co.	48
Chase Aircraft Co., Inc.	8	Agency—Dudgeon, Taylor & Bruske, Inc.	
Darnell Corporation, Ltd.	25	Wittek Manufacturing Company.....	31
Agency—Rhea Advertising Service		Agency—The Advertising Corp.	
Douglas Aircraft Co., Inc.	29	Wyman Gordon Co.	6
Agency—J. Walter Thompson Co.		Agency—John W. Odlin Co., Inc.	
Edo Corporation	45	PROFESSIONAL SERVICES.....	52
Agency—Davis-Parson, Inc.		SEARCHLIGHT SECTION	
Eclipse-Pioneer Div. of Bendix Aviation Corp.	23	(Classified Advertising)	
Agency—MacManus, John & Adams, Inc.		EMPLOYMENT	
Electric Storage Battery Co., The	42	Positions Vacant.....	52, 53, 54
Agency—Geare-Marston, Inc.		Positions Wanted.....	52
Electrical Engineering & Mfg. Corp.....	20	SPECIAL SERVICES	
Agency—West-Marquis, Inc.		Contract Work	54
Ex-Cell-O Corporation	24	EDUCATIONAL	
Agency—Holden, Clifford, Flint, Inc.		Schools	54
Fafnir Bearing Co., The	5	PLANES—EQUIPMENT	
Agency—Horton-Noves Co.		(Used or Surplus New)	
Fairchild Engine & Airplane Corp.		For Sale.....	53, 54, 55
Third Cover			
Agency—Buchanan & Co., Inc.			
General Electric Company.....	Fourth Cover		
Agency—G. M. Basford Co.			
Goodrich Co., The B. F.	3		
Agency—Batten, Barton, Durstine & Osborn, Inc.			
Grumman Aircraft Engineering Corp.			
Front Cover			
Agency—Charles W. Hoyt Co., Inc.			
Gulf Oil Corporation.....	10		
Agency—Young & Rubicam, Inc.			
Hartman Electrical Mfg. Co.....	50		
Agency—Palm & Patterson, Inc.			
Holley Carburetor Company.....	35		
Agency—Holden-Clifford-Flint, Inc.			
International Nickel Co., Inc., The.....	56		
Agency—Marchalk & Pratt Co.			
Lewis Engineering Co., The	56		
Lockheed Aircraft Corp.	57		
Agency—Hal Stebbins, Inc.			
McGraw-Hill Book Co., Inc.....	33		
Meletron Corporation	48		
National Aeronautical Corp.	46		
Agency—I. Branch Briggs Adv.			
Piasecki Helicopter Corp.	57		
Agency—B. K. Davis & Bro.			
Pioneer Parachute Company, Inc.....	39		
Agency—Julian Gross Adv. Agency			
Pittsburgh Plate Glass Co.....	30		
Agency—Batten, Barton, Durstine & Osborn, Inc.			

ENGINEERING TEST PILOT

For established flight research organization. Minimum requirements, 2500 hours commercial-instrument single and multi engine land. B.S. in engineering required.

Box AW 621, 221 W 41 St. N.Y. 18



Lockheed in California has an important position for you

Lockheed invites you to participate in its long-range production program, developing the aircraft of the future.

Lockheed offers an attractive salary now, a future in aeronautical science, a chance to live and work in Southern California.

Lockheed also offers generous travel allowances to those who qualify.

Lockheed has immediate openings for:

Electronics Engineers
Aircraft Design Engineers
Stress Engineers and Analysts
Production Design Engineers
Engineering Technical Writers
Flight Manuals Engineers
Aircraft Equipment Engineers

Write today—giving full particulars as to training and experience. Address:

Karl R. Kunze, Employment Manager
LOCKHEED Aircraft Corporation
Burbank, California

If Y-O-U Are LOOKING To The FUTURE With a Leader

... exceptional opportunities await qualified men who join in the long range program now well under way at

PIASECKI Helicopter Corp.

Attractive Openings Available for

LAYOUT DRAFTSMEN

Experience in aircraft work is desirable, but those experienced in other fields will be hired and paid regular salaries while being trained to do our type of work which includes—

Design Of

- AIRFRAMES
- CONTROLS
- TRANSMISSIONS

and Installation Of

- POWER PLANT
- ELECTRICAL & RADIO
- EQUIPMENT

also

- WEIGHT ANALYSTS

Excellent Company Benefits Paid Vacations

and Opportunity To Advance In Both Pay & Responsibility In This Growing Industry

Write, Giving Detailed Resume of Experience & Education to—

PIASECKI HELICOPTER CORP.
Morton, Pa. (Near Philadelphia)

Rail and Air Casualty Rates

TWA's president, Ralph Damon, wrote this recently to the magazine, *Railway Progress*:

"Comparisons of safety records perhaps are in questionable taste, but ICC and CAB statistics show that rail passenger casualties (fatalities and injuries) per 100 million passenger miles in 1948 were 5.2 times as great as for the airlines."

Missile Coordination

With formation of the Office of Guided Missiles, under the widely respected K. T. Keller, of Chrysler Corp., the Department of Defense has taken an important step toward coordinating vital work by Army, Navy and Air Force.

Keller will report directly to Defense Secretary Marshall, and has already set to work preparing a unified program for the future.

As AVIATION WEEK pointed out in two editorials on this page weeks ago, the lack of coordination and planning of the three services in missile research was rapidly becoming a national scandal. There was little knowledge in one service of what the others were doing, and each group had its own ideas—some very fuzzy, indeed—as to what its goals should be.

In some aviation activities competition between the services can stimulate progress, while unification can act as a stultifying influence. But in the tremendously important missile field, where so many basic facts are still unknown, some kind of clearing house and overall planning agency is essential. This overall agency then can direct the individual services in unduplicated research most needed in their own particular methods of fighting.

Why Raise Coach Fares?

Do you remember a year or so ago when the Civil Aeronautics Board called top executives of the domestic airlines to Washington and advised them one way they could stop the trend toward bigger losses was to raise fares?

A few did, but American Airlines refused to go along, so the lines that followed CAB's unofficial advice had to drop their fares again a few weeks later. Higher fares quickly siphoned off passengers from lines like United, that raised rates, to carriers like American, that didn't.

Led by promotionally minded American Airlines, originators of the family fare plan, the industry then began cutting first class fares in earnest, and starting air coaches.

What happened? Read the latest announcement from the Air Transport Assn. for yourself.

The 16 trunk lines expect to break all records for passengers this year by some 20 percent more passenger miles.

This is almost 20 percent more than the previous record, in 1949. It will be the second-largest year-to-year increase in airline history, ATA points out.

In the first 10 months of 1950, passengers flew more mileage than they did in the entire 12 months of 1949. The estimate for November is 25 percent higher than for November last year. December may run 20 percent over last December.

But what about profits? This airline business has always been able to hang up all kinds of new traffic records, but red figures were more likely to pop up on the profit and loss sheets than black ones. Well, unofficial estimates of industry profits for 1950 now run as high as \$50 million, or better than double the \$23½ million earned last year.

Industry spokesmen attribute this big 1950 gain not only to good weather and better business conditions generally. They give credit to large scale air coach services and special travel rates such as the family fares.

With this in mind, please join us in trying to fathom the reason for the Civil Aeronautics Board's pronouncement a few weeks ago that coach fares must go up a half-cent a mile in 1951.

This Board, that was so very wrong on this fare subject a short time ago, said it based its decision to raise fares on surveys and studies. But so far it has not had the courage to release these studies and subject them to critical examination of the press and public.

We repeat—with the latest announcement by the ATA in mind—how do you explain the Board's arbitrary fare action, especially in light of the Civil Aeronautics Act's emphatic instruction to the Board to foster and promote air transportation?

Such inexplicable actions as this, and others holding down new coach services and restricting others which had already started—do nothing to dissipate a suspicion that somewhere in high places there is a conspiracy against letting the air coach show it can be made to pay.

Could it be that there are still a few highly placed aviation people who do not want any surcease from the present mail pay system even with its onerous government regulation and extra drain on the taxpayer?

Are these enemies of the air coach afraid that mass air transportation will bring a downward revision of air mail rates? Are they afraid to risk standing on their own feet in depression periods? If so, why do they lack the courage to fight air coach in the open? And why do they give it lip service in public if they secretly are fighting it?

Such action as the CAB's strange order add potency to the rather widespread opinion that the Board is still woefully weak in standing up to outside influences and pressures.

—Robert H. Wood



"Umbrellas" represent one of the first lines of a complete national defense system!

Above these hundreds of silken parachutes fly Fairchild planes...the best equipped "to-do-the-job" aircraft in the skies.

Fairchild leadership in the development of tactical airplanes is now playing a vital part in the vast production mobilization program. Like the airborne trooper, the C-82 Packet, the

C-119 Improved Cargo and Troop Transport and the C-120 Detachable Fuselage Transport are parts of the United States Armed Forces Team.

Only this type of coordination between air and ground units could have given the word "Airlift" to our vocabulary. Whether it is generators for the lights of Berlin, trucks, guns or highly trained paratroopers for Korea—Fairchild Airplanes are ready, willing and able to deliver the goods...no matter what sort of weather lies ahead.


ENGINE AND AIRPLANE CORPORATION
FAIRCHILD Aircraft Division
ROQUETTEVILLE, MARYLAND

Fairchild-NEPA Div., Oak Ridge, Tenn. • Fairchild Engine, Guided Missiles, AI-Fin and Stratos Divisions, Farmingdale, N.Y.

Flight testing an idea



Complete electrical systems for any given aircraft can be simulated on this network analyzer.

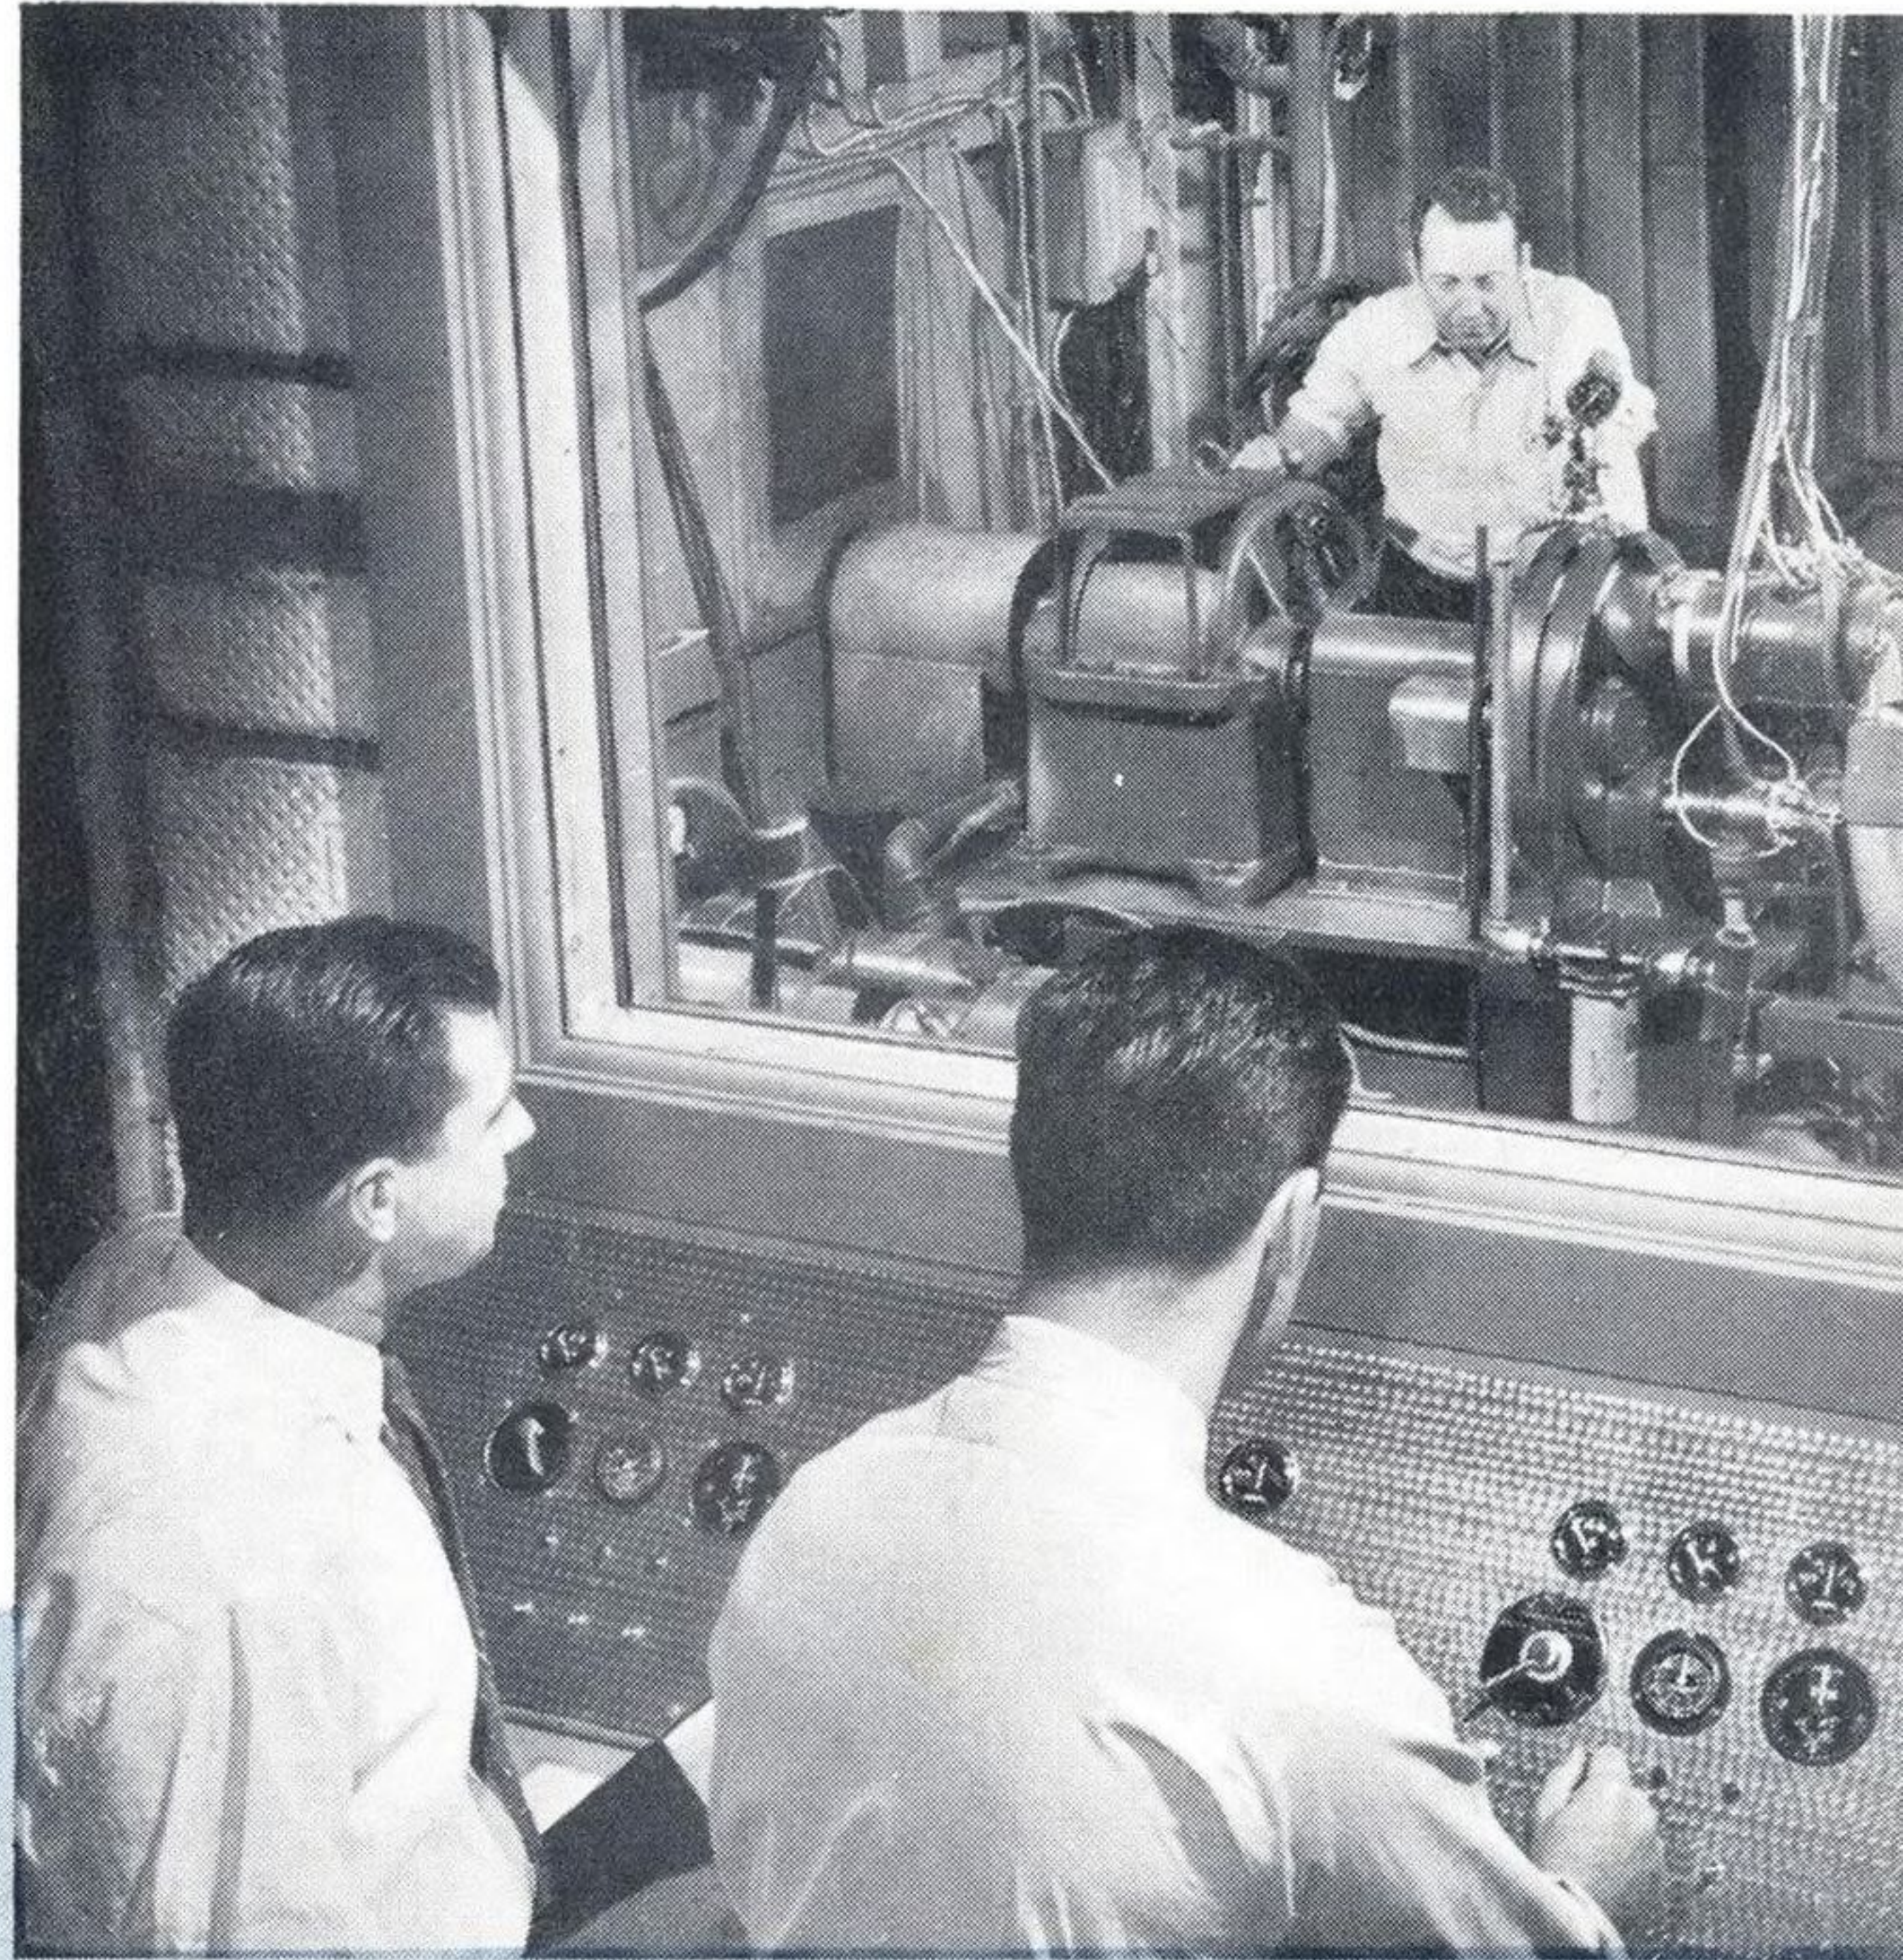

Radial-type engines help this test stand duplicate aircraft power systems for testing purposes.

Even ideas are flight tested at General Electric. Both before and after an aircraft electrical system is built, G-E's aviation divisions check it out under actual operating conditions to save you expensive "de-bugging."

Your power distribution system, for example, is first "flown" on the analyzer. Electrical circuits for your plane are cranked into the board and the idea is worked over until the analyzer OKs it.

A model then gets a long rugged workout in the Aircraft Systems Test Lab to iron out final kinks. When design is "right," production begins. Finally, individual component parts are tested before installation in your aircraft.

Project engineers are chosen for experience as well as scientific "know-how." Pilots, navigators, flight engineers, military and transport, are represented. George Phillips, for instance, shown "flying" a distribution network, is an ex-Air Force maintenance officer.

This combination of theoretical analysis and practical testing by men who know aviation problems means trustworthy electrical systems without extensive "de-bugging" after installation.

For aircraft electrical equipment that will give you long trouble-free service, call your General Electric aviation specialist or write Apparatus Dept., General Electric Company, Schenectady, N. Y.



- TURBOJET ENGINES
- TURBOSUPERCHARGERS
- MOTORS AND CONTROL
- INSTRUMENTS
- ELECTRICAL AND SERVO SYSTEMS
- GAS TURBINE IGNITION AND CONTROL
- GENERATORS AND TRANSFORMERS
- ELECTRONICS AND COMMUNICATIONS SYSTEMS

You can put your confidence in—

GENERAL  ELECTRIC