

Math into L^AT_EX

An Introduction to L^AT_EX and $\mathcal{A}\mathcal{M}\mathcal{S}$ -L^AT_EX

*This book is dedicated to those who worked so hard
and for so long to bring these important tools to us:*

The L^AT_EX3 team

and in particular

Frank Mittelbach (project leader) and David Carlisle

The $\mathcal{A}\mathcal{M}\mathcal{S}$ team

and in particular

Michael J. Downes (project leader) and David M. Jones

George Grätzer

Math into L^AT_EX

An Introduction to L^AT_EX and $\mathcal{A}\mathcal{M}\mathcal{S}$ -L^AT_EX

B I R K H Ä U S E R

B O S T O N • B A S E L • B E R L I N

George Grätzer
Department of Mathematics
University of Manitoba
Winnipeg, Manitoba
Canada R3T 2N2

Library of Congress Cataloging-in-Publication Data

Grätzer, George A.

Math into LaTeX : an introduction to LaTeX and AMS-LaTeX /

George Grätzer

p. cm.

Includes index.

ISBN 0-8176-3805-9 (acid-free paper) (pbk. : alk. paper)

1. AMS-LaTeX. 2. Mathematics printing--Computer programs.
3. Computerized typesetting. I. Title.

Z253.4A65G69 1995

95-36881

688.2'2544536--dc20

CIP

Printed on acid-free paper

© Birkhäuser Boston 1996

All rights reserved.

Typeset by the Author in L^AT_EX

Design, layout, and typography by Mery Sawdey, Minneapolis, MN

Short contents

Preface	xviii
Introduction	xix
I A short course	1
1 Typing your first article	3
II Text and math	59
2 Typing text	61
3 Text environments	111
4 Typing math	140
5 Multiline math displays	180
III Document structure	209
6 L ^A T _E X documents	211
7 Standard L ^A T _E X document classes	235
8 $\mathcal{A}\mathcal{M}\mathcal{S}$ -L ^A T _E X documents	243

IV Customizing	265
9 Customizing L ^A T _E X	267
V Long bibliographies and indexes	309
10 B _I B _T E _X	311
11 <i>MakeIndex</i>	332
A Math symbol tables	345
B Text symbol tables	356
C The <i>AMS</i> -L ^A T _E X sample article	360
D Sample article with user-defined commands	372
E Background	379
F PostScript fonts	387
G Getting it	392
H Conversions	402
I Final word	410
Bibliography	413
Afterword	416
Index	419

Contents

Preface	xviii
Introduction	xix
Typographical conventions	xxvi
I A short course	1
1 Typing your first article	3
1.1 Typing a very short “article”	4
1.1.1 The keyboard	4
1.1.2 Your first note	5
1.1.3 Lines too wide	7
1.1.4 More text features	9
1.2 Typing math	10
1.2.1 The keyboard	10
1.2.2 A note with math	10
1.2.3 Building blocks of a formula	14
1.2.4 Building a formula step-by-step	20
1.3 Formula gallery	22
1.4 Typing equations and aligned formulas	29
1.4.1 Equations	29
1.4.2 Aligned formulas	31
1.5 The anatomy of an article	33
1.5.1 The typeset article	38
1.6 Article templates	41
1.7 Your first article	42
1.7.1 Editing the top matter	42

1.7.2	Sectioning	43
1.7.3	Invoking proclamations	44
1.7.4	Inserting references	44
1.8	L ^A T _E X error messages	46
1.9	Logical and visual design	48
1.10	A brief overview	51
1.11	Using L ^A T _E X	52
1.11.1	$\mathcal{A}\mathcal{M}\mathcal{S}$ -L ^A T _E X revisited	52
1.11.2	Interactive L ^A T _E X	54
1.11.3	Files	54
1.11.4	Versions	55
1.12	What's next?	56
II	Text and math	59
2	Typing text	61
2.1	The keyboard	62
2.1.1	The basic keys	62
2.1.2	Special keys	63
2.1.3	Prohibited keys	63
2.2	Words, sentences, and paragraphs	64
2.2.1	The spacing rules	64
2.2.2	The period	66
2.3	Instructing L ^A T _E X	67
2.3.1	Commands and environments	67
2.3.2	Scope	70
2.3.3	Types of commands	72
2.4	Symbols not on the keyboard	73
2.4.1	Quotes	73
2.4.2	Dashes	73
2.4.3	Ties or nonbreakable spaces	74
2.4.4	Special characters	74
2.4.5	Ligatures	75
2.4.6	Accents and symbols in text	75
2.4.7	Logos and numbers	76
2.4.8	Hyphenation	78
2.5	Commenting out	81
2.6	Changing font characteristics	83
2.6.1	The basic font characteristics	83
2.6.2	The document font families	84
2.6.3	Command pairs	85
2.6.4	Shape commands	85

2.6.5	Italic correction	86
2.6.6	Two-letter commands	87
2.6.7	Series	88
2.6.8	Size changes	88
2.6.9	Orthogonality	89
2.6.10	Boxed text	89
2.7	Lines, paragraphs, and pages	90
2.7.1	Lines	90
2.7.2	Paragraphs	93
2.7.3	Pages	94
2.7.4	Multicolumn printing	95
2.8	Spaces	96
2.8.1	Horizontal spaces	96
2.8.2	Vertical spaces	97
2.8.3	Relative spaces	99
2.8.4	Expanding spaces	99
2.9	Boxes	100
2.9.1	Line boxes	100
2.9.2	Paragraph boxes	103
2.9.3	Marginal comments	104
2.9.4	Solid boxes	105
2.9.5	Fine-tuning boxes	106
2.10	Footnotes	107
2.10.1	Fragile commands	107
2.11	Splitting up the file	108
2.11.1	Input and include	108
2.11.2	Combining files	109
3	Text environments	111
3.1	List environments	112
3.1.1	Numbered lists: <code>enumerate</code>	112
3.1.2	Bulleted lists: <code>itemize</code>	112
3.1.3	Captioned lists: <code>description</code>	113
3.1.4	Rule and combinations	114
3.2	Tabbing environment	116
3.3	Miscellaneous displayed text environments	118
3.4	Proclamations (theorem-like structures)	123
3.4.1	The full syntax	127
3.4.2	Proclamations with style	127
3.5	Proof environment	130
3.6	Some general rules for displayed text environments	131
3.7	Tabular environment	132

3.8	Style and size environments	138
4	Typing math	140
4.1	Math environments	141
4.2	The spacing rules	143
4.3	The equation environment	144
4.4	Basic constructs	146
4.4.1	Arithmetic	146
4.4.2	Subscripts and superscripts	147
4.4.3	Roots	148
4.4.4	Binomial coefficients	149
4.4.5	Integrals	149
4.4.6	Ellipses	150
4.5	Text in math	151
4.6	Delimiters	152
4.6.1	Delimiter tables	153
4.6.2	Delimiters of fixed size	153
4.6.3	Delimiters of variable size	154
4.6.4	Delimiters as binary relations	155
4.7	Operators	155
4.7.1	Operator tables	156
4.7.2	Declaring operators	157
4.7.3	Congruences	158
4.8	Sums and products	159
4.8.1	Large operators	159
4.8.2	Multiline subscripts and superscripts	160
4.9	Math accents	161
4.10	Horizontal lines that stretch	162
4.10.1	Horizontal braces	162
4.10.2	Over and underlines	163
4.10.3	Stretchable arrow math symbols	164
4.11	The spacing of symbols	164
4.12	Building new symbols	166
4.12.1	Stacking symbols	167
4.12.2	Declaring the type	168
4.13	Vertical spacing	169
4.14	Math alphabets and symbols	170
4.14.1	Math alphabets	171
4.14.2	Math alphabets of symbols	172
4.14.3	Bold math symbols	173
4.14.4	Size changes	175
4.14.5	Continued fractions	175

4.15	Tagging and grouping	176
4.16	Generalized fractions	178
4.17	Boxed formulas	179
5	Multiline math displays	180
5.1	Gathering formulas	181
5.2	Splitting a long formula	182
5.3	Some general rules	184
5.3.1	The subformula rule	185
5.3.2	Group numbering	186
5.4	Aligned columns	187
5.4.1	The subformula rule revisited	188
5.4.2	Align variants	189
5.4.3	Intertext	192
5.5	Aligned subsidiary math environments	193
5.5.1	Subsidiary variants of aligned math environments	193
5.5.2	Split	195
5.6	Adjusted columns	198
5.6.1	Matrices	198
5.6.2	Arrays	201
5.6.3	Cases	203
5.7	Commutative diagrams	204
5.8	Pagebreak	205
III	Document structure	209
6	L^AT_EX documents	211
6.1	The structure of a document	212
6.2	The preamble	213
6.3	Front matter	214
6.3.1	Abstract	214
6.3.2	Table of contents	215
6.4	Main matter	217
6.4.1	Sectioning	217
6.4.2	Cross-referencing	220
6.4.3	Tables and figures	223
6.5	Back matter	227
6.5.1	Bibliography in an article	227
6.5.2	Index	231
6.6	Page style	232

7	Standard L ^A T _E X document classes	235
7.1	The <code>article</code> , <code>report</code> , and <code>book</code> document classes	235
7.1.1	More on sectioning	236
7.1.2	Options	237
7.2	The <code>letter</code> document class	239
7.3	The L ^A T _E X distribution	240
7.3.1	Tools	241
8	$\mathcal{A}\mathcal{M}\mathcal{S}$ -L ^A T _E X documents	243
8.1	The three $\mathcal{A}\mathcal{M}\mathcal{S}$ document classes	243
8.1.1	Font size commands	244
8.2	The top matter	244
8.2.1	Article info	245
8.2.2	Author info	246
8.2.3	$\mathcal{A}\mathcal{M}\mathcal{S}$ info	249
8.2.4	Multiple authors	250
8.2.5	Examples	250
8.3	$\mathcal{A}\mathcal{M}\mathcal{S}$ article template	253
8.4	Options	257
8.4.1	Math options	260
8.5	The $\mathcal{A}\mathcal{M}\mathcal{S}$ -L ^A T _E X packages	261
IV	Customizing	265
9	Customizing L ^A T _E X	267
9.1	User-defined commands	268
9.1.1	Commands as shorthand	268
9.1.2	Arguments	271
9.1.3	Redefining commands	274
9.1.4	Optional arguments	275
9.1.5	Redefining names	276
9.1.6	Showing the meaning of commands	276
9.2	User-defined environments	279
9.2.1	Short arguments	282
9.3	Numbering and measuring	282
9.3.1	Counters	283
9.3.2	Length commands	287
9.4	Delimited commands	290
9.5	A custom command file	292
9.6	Custom lists	297
9.6.1	Length commands for the <code>list</code> environment	297
9.6.2	The <code>list</code> environment	299

9.6.3 Two complete examples	301
9.6.4 The <code>trivlist</code> environment	304
9.7 Custom formats	304
V Long bibliographies and indexes	309
10 <code>BIBTEX</code>	311
10.1 The database	311
10.1.1 Entry types	312
10.1.2 Articles	315
10.1.3 Books	316
10.1.4 Conference proceedings and collections	317
10.1.5 Theses	319
10.1.6 Technical reports	320
10.1.7 Manuscripts	321
10.1.8 Other entry types	321
10.1.9 Abbreviations	322
10.2 Using <code>BIBTEX</code>	323
10.2.1 The sample files	323
10.2.2 The setup	325
10.2.3 The four steps of <code>BIBTEX</code> ing	325
10.2.4 The files of <code>BIBTEX</code>	327
10.2.5 <code>BIBTEX</code> rules and messages	329
10.2.6 Concluding comments	331
11 <code>MakeIndex</code>	332
11.1 Preparing the document	332
11.2 Index entries	335
11.3 Processing the index entries	339
11.4 Rules	342
11.5 Glossary	344
A Math symbol tables	345
B Text symbol tables	356
C The $\mathcal{A}\mathcal{M}\mathcal{S}$-<code>L^AT_EX</code> sample article	360
D Sample article with user-defined commands	372

E	Background	379
E.1	A short history	379
E.1.1	The first interim solution	381
E.1.2	The second interim solution	382
E.2	How does it work?	382
E.2.1	The layers	382
E.2.2	Typesetting	383
E.2.3	Viewing and printing	384
E.2.4	The files of L ^A T _E X	385
F	PostScript fonts	387
F.1	The Times font and MathTime	387
F.2	LucidaBright fonts	390
G	Getting it	392
G.1	Getting T _E X	392
G.2	Where to get it?	393
G.3	Getting ready	395
G.4	Transferring files	396
G.5	More advanced file transfer commands	398
G.6	The sample files	400
G.7	ℳS and the user groups	400
H	Conversions	402
H.1	From Plain T _E X	402
H.1.1	T _E X code in L ^A T _E X	403
H.2	From L ^A T _E X	403
H.2.1	Version 2e	404
H.2.2	Version 2.09	404
H.2.3	The L ^A T _E X symbols	405
H.3	From ℳS-T _E X	405
H.4	From ℳS-L ^A T _E X version 1.1	406
I	Final word	410
I.1	What was left out?	410
I.1.1	Omitted from L ^A T _E X	410
I.1.2	Omitted from T _E X	411
I.2	Further reading	411
	Bibliography	413
	Afterword	416
	Index	419

List of tables

2.1	Special characters	74
2.2	Font table for Computer Modern typewriter style font	76
2.3	European accents	76
2.4	Extra text symbols	77
2.5	European characters	77
2.6	Font family switching commands	85
3.1	Tabular table	133
3.2	Floating table with <code>\multicolumn</code>	136
3.3	Tabular table with <code>\multicolumn</code> and <code>\cline</code>	137
4.1	Standard delimiters	153
4.2	Arrow delimiters	153
4.3	Operators without limits	157
4.4	Operators with limits	157
4.5	Congruences	158
4.6	Large operators	159
4.7	Math accents	161
4.8	Spacing commands	165
9.1	Table of redefinable names in L ^A T _E X	277
9.2	Standard L ^A T _E X counters	283
A.1	Hebrew letters	345
A.2	Greek characters	346
A.3	L ^A T _E X binary relations	347
A.4	$\mathcal{M}\mathcal{S}$ binary relations	348
A.5	$\mathcal{M}\mathcal{S}$ negated binary relations	349

A.6	Binary operations	350
A.7	Arrows	351
A.8	Miscellaneous symbols	352
A.9	Math spacing commands	353
A.10	Delimiters	353
A.11	Operators	354
A.12	Math accents	355
A.13	Math font commands	355
B.1	Special text characters	356
B.2	Text accents	357
B.3	Some European characters	357
B.4	Extra text symbols	357
B.5	Text spacing commands	358
B.6	Text font commands	358
B.7	Font size changes	359
B.8	$\mathcal{A}\mathcal{M}\mathcal{S}$ font size changes	359
F.1	Lower font table for the Times font	389
F.2	Upper font table for the Times font	389
G.1	Some UNIX commands	395
G.2	Some <code>ftp</code> commands	396
H.1	$\mathrm{T}\mathrm{E}\mathrm{X}$ commands to avoid in $\mathrm{L}^{\mathrm{A}}\mathrm{T}\mathrm{E}\mathrm{X}$	404
H.2	A translation table	405
H.3	$\mathcal{A}\mathcal{M}\mathcal{S}\text{-}\mathrm{T}\mathrm{E}\mathrm{X}$ style commands dropped in $\mathcal{A}\mathcal{M}\mathcal{S}\text{-}\mathrm{L}^{\mathrm{A}}\mathrm{T}\mathrm{E}\mathrm{X}$	407
H.4	$\mathcal{A}\mathcal{M}\mathcal{S}\text{-}\mathrm{T}\mathrm{E}\mathrm{X}$ commands to avoid	408

List of figures

1.1	A schematic view of an article	34
1.2	The structure of L ^A T _E X	51
1.3	Using L ^A T _E X	53
6.1	The structure of a document	212
6.2	Sectioning commands in the <code>article</code> document class	219
6.3	Sectioning commands in the <code>amsart</code> document class	219
6.4	Page layout for the <code>article</code> document class	233
8.1	<code>fleqn</code> and <code>reqno</code> options for equations	258
8.2	Top-or-bottom tags option for <code>split</code>	258
8.3	$\mathcal{A}\mathcal{M}\mathcal{S}$ -L ^A T _E X package and document class interdependency	263
9.1	The layout of a custom list	298
10.1	Using B _I B _T E _X , Step 2	326
10.2	Using B _I B _T E _X , Step 3	326
11.1	A sample index	335
11.2	Using <i>MakeIndex</i> , Step 1	340
11.3	Using <i>MakeIndex</i> , Step 2	340

Preface

It is indeed a lucky author who is given the opportunity to completely rewrite a book barely a year after its publication. Writing about software affords such opportunities (especially if the original edition sold out), since the author is shooting at a moving target.

L^AT_EX and $\mathcal{A}\mathcal{M}\mathcal{S}$ -L^AT_EX improved dramatically with the release of the new standard L^AT_EX (called L^AT_EX 2_ε) in June of 1994 and the revision of $\mathcal{A}\mathcal{M}\mathcal{S}$ -L^AT_EX (version 1.2) in February of 1995. The change in $\mathcal{A}\mathcal{M}\mathcal{S}$ -L^AT_EX is profound. L^AT_EX 2_ε made it possible for $\mathcal{A}\mathcal{M}\mathcal{S}$ -L^AT_EX to join the L^AT_EX world. One of the main points of the present book is to make this clear. This book introduces L^AT_EX as a tool for mathematical typesetting, and treats $\mathcal{A}\mathcal{M}\mathcal{S}$ -L^AT_EX as a set of enhancements to the standard L^AT_EX, to be used in conjunction with hundreds of other L^AT_EX 2_ε enhancements.

I am not a T_EX expert. Learning the mysteries of the system has given me great respect for those who crafted it: Donald Knuth, Leslie Lamport, Michael Spivak, and others did the original work; David Carlisle, Michael J. Downes, David M. Jones, Frank Mittelbach, Rainer Schöpf, and many others built on the work of these pioneers to create the new L^AT_EX and $\mathcal{A}\mathcal{M}\mathcal{S}$ -L^AT_EX.

Many of these experts and a multitude of others helped me while I was writing this book. I would like to express my deepest appreciation and heartfelt thanks to all who gave their time so generously. Their story is told in the Afterword.

Of course, the responsibility is mine for all the mistakes remaining in the book. Please send corrections—and suggestions for improvements—to me at the following address:

Department of Mathematics
University of Manitoba
Winnipeg MB, R3T 2N2
Canada
e-mail: George.Gratzer@umanitoba.ca

Introduction

Is this book for you?

This book is for the mathematician, engineer, scientist, or technical typist who wants to write and typeset articles containing mathematical formulas but does not want to spend much time learning how to do it.

I assume you are set up to use L^AT_EX, and you know how to use an editor to type a document, such as:

```
\documentclass{article}
\begin{document}
The square root of two:  $\sqrt{2}$ . I can type math!
\end{document}
```

I also assume you know how to typeset a document, such as this example, with L^AT_EX to get the printed version:

```
┌
| The square root of two:  $\sqrt{2}$ . I can type math!
└
```

and you can view and print the typeset document.

And what do I promise to deliver? I hope to provide you with a solid foundation in L^AT_EX, the $\mathcal{A}\mathcal{M}\mathcal{S}$ enhancements, and some standard L^AT_EX enhancements, so typing a mathematical document will become second nature to you.

How to read this book?

Part I gives a short course in L^AT_EX. Read it, work through the examples, and you are ready to type your first paper. Later, at your leisure, read the other parts to become more proficient.

The rest of this section introduces $\text{T}_{\text{E}}\text{X}$, $\text{L}^{\text{A}}\text{T}_{\text{E}}\text{X}$, and $\mathcal{A}\mathcal{M}\mathcal{S}\text{-L}^{\text{A}}\text{T}_{\text{E}}\text{X}$, and then outlines what is in this book. If you already know that you want to use $\text{L}^{\text{A}}\text{T}_{\text{E}}\text{X}$ to typeset math, you may choose to skip it.

$\text{T}_{\text{E}}\text{X}$, $\text{L}^{\text{A}}\text{T}_{\text{E}}\text{X}$, and $\mathcal{A}\mathcal{M}\mathcal{S}\text{-L}^{\text{A}}\text{T}_{\text{E}}\text{X}$

$\text{T}_{\text{E}}\text{X}$ is a typesetting language created by Donald E. Knuth; it has extensive capabilities to typeset math. $\text{L}^{\text{A}}\text{T}_{\text{E}}\text{X}$ is an extension of $\text{T}_{\text{E}}\text{X}$ designed by Leslie Lamport; its major features include

- a strong focus on document structure and the logical markup of text;
- automatic numbering and cross-referencing.

$\mathcal{A}\mathcal{M}\mathcal{S}\text{-L}^{\text{A}}\text{T}_{\text{E}}\text{X}$ distills the decades-long experience of the American Mathematical Society ($\mathcal{A}\mathcal{M}\mathcal{S}$) in publishing mathematical journals and books; it *adds to* $\text{L}^{\text{A}}\text{T}_{\text{E}}\text{X}$ a host of features related to mathematical typesetting, especially the typesetting of multi-line formulas and the production of finely-tuned printed output.

Articles written in $\text{L}^{\text{A}}\text{T}_{\text{E}}\text{X}$ (and $\mathcal{A}\mathcal{M}\mathcal{S}\text{-L}^{\text{A}}\text{T}_{\text{E}}\text{X}$) are accepted for publication by an increasing number of journals, including all the journals of the $\mathcal{A}\mathcal{M}\mathcal{S}$.

Look at the typeset sample articles: `sampart.tex` (in Appendix C, on pages 361–363) and `intrart.tex` (on pages 39–40). You can begin creating such high-quality typeset articles after completing Part I.

What is document markup?

Most word processing programs are WYSIWYG (what you see is what you get); as you work, the text on the computer monitor is shown, more or less, as it’ll look when printed. Different fonts, font sizes, italics, and bold face are all shown.

A different approach is taken by a *markup language*. It works with a text editor, an editing program that shows the text, the *source file*, on the computer monitor with only one font, in one size and shape. To indicate that you wish to change the font in the printed copy in some way, you must “mark up” the source file. For instance, to typeset the phrase “Small Caps” in small caps, you type

```
\textsc{Small Caps}
```

The `\textsc` command is a markup command, and the printed output is

```
┌
└ SMALL CAPS
```

$\text{T}_{\text{E}}\text{X}$ is a markup language; $\text{L}^{\text{A}}\text{T}_{\text{E}}\text{X}$ is another markup language, an extension of $\text{T}_{\text{E}}\text{X}$. Actually, it’s quite easy to learn how to mark up text. For another example, look at the abstract of the `sampart.tex` sample article (page 364), and the instruction

```
\emph{complete-simple distributive lattices}
```

to emphasize the phrase “complete-simple distributive lattices”, which when typeset looks like

```
┌
  complete-simple distributive lattices
└
```

On pages 364–371 we show the source file and the typeset version of the `sampart.tex` sample article together. The markup in the source file may appear somewhat bewildering at first, especially if you have previously worked on a WYSIWYG word processor. The typeset article is a rather pleasing-to-the-eye polished version of that same marked up material.¹

T_EX

T_EX has excellent typesetting capabilities. It deals with mathematical formulas as well as text. To get $\sqrt{a^2 + b^2}$ in a formula, type `\sqrt{a^{2} + b^{2}}`. There is no need to worry about how to construct the square root symbol that covers $a^2 + b^2$.

A tremendous appeal of the T_EX language is that a source file is *plain text*, sometimes called an ASCII file.² Therefore articles containing even the most complicated mathematical expressions can be readily transmitted *electronically*—to colleagues, coauthors, journals, editors, and publishers.

T_EX is *platform independent*. You may type the source file on a Macintosh, and your coauthor may make improvements to the same file on an IBM compatible personal computer; the journal publishing the article may use a DEC minicomputer. The form of T_EX, a richer version, used to typeset documents is called *Plain T_EX*. I’ll not try to distinguish between the two.

T_EX, however, is a programming language, meant to be used by programmers.

L^AT_EX

L^AT_EX is much easier and safer to work with than T_EX; it has a number of built-in safety features and a large set of error messages.

L^AT_EX, building on T_EX, provides the following additional features:

- An article is divided into *logical units* such as an abstract, sections, theorems, a bibliography, and so on. The logical units are typed separately. After all the

¹Of course, markup languages have always dominated typographic work of high quality. On the Internet, the most trendy communications on the World Wide Web are written in a markup language called HTML (HyperText Markup Language).

²ASCII stands for American Standard Code for Information Interchange.

units have been typed, L^AT_EX organizes the *placement* and *formatting* of these elements.

Notice line 4 of the source file of the `sampart.tex` sample article

```
\documentclass{amsart}
```

on page 364. Here the general design is specified by the `amsart` “document class”, which is the $\mathcal{A}\mathcal{M}\mathcal{S}$ article document class. When submitting your article to a journal that is equipped to handle L^AT_EX articles (and the number of such journals is increasing rapidly), only the *name of the document class* is replaced by the editor to make the article conform to the design of the journal.

- L^AT_EX relieves you of tedious *bookkeeping chores*. Consider a completed article, with theorems and equations numbered and properly cross-referenced. Upon final reading, some changes must be made—for example, section 4 has to be placed after section 7, and a new theorem has to be inserted somewhere in the middle. Such a minor change used to be a major headache! But with L^AT_EX, it becomes almost a pleasure to make such changes. L^AT_EX automatically redoes all the numbering and cross-references.
- Typing the same *bibliographic references* in article after article is a tedious chore. With L^AT_EX you may use BIB_TE_X, a program that helps you create and maintain bibliographic databases, so references need not be retyped for each article. BIB_TE_X will select and format the needed references from the databases.

All the features of L^AT_EX are made available by the L^AT_EX format, which you should use to typeset the sample documents in this book.

$\mathcal{A}\mathcal{M}\mathcal{S}$ -L^AT_EX

The $\mathcal{A}\mathcal{M}\mathcal{S}$ enhanced the capabilities of L^AT_EX in three different areas. You decide which of these are important to you.

1. **Math enhancements.** The first area of improvement is a wide variety of tools for typesetting math. $\mathcal{A}\mathcal{M}\mathcal{S}$ -L^AT_EX provides

- excellent tools to deal with *multiline math formulas* requiring special alignment. For instance, in the following formula, the equals sign (=) is vertically aligned and so are the explanatory comments:

$$\begin{array}{ll} x = (x + y)(x + z) & \text{(by distributivity)} \\ = x + yz & \text{(by Condition (M))} \\ = yz & \end{array}$$

- numerous constructs for typesetting math, exemplified by the following formula:

$$f(x) = \begin{cases} -x^2, & \text{if } x < 0; \\ \alpha + x, & \text{if } 0 \leq x \leq 1; \\ x^2, & \text{otherwise.} \end{cases}$$

- special spacing rules for dozens of formula types, for example

$$a \equiv b \pmod{\Theta}$$

If the above formula is typed inline, it becomes: $a \equiv b \pmod{\Theta}$; the spacing is automatically changed.

- multiline “subscripts” as in

$$\sum_{\substack{i < n \\ j < m}} \alpha_{i,j}^2$$

- user-defined symbols for typesetting math, such as

$$\text{Trunc } f(x), \quad \hat{A}, \quad \sum^*$$

- formulas numbered in a variety of ways:
 - automatically,
 - manually (by tagging),
 - by groups, with a group number such as (2), and individual numbers such as (2a), (2b), and so on.
- the `proof` environment and three theorem styles; see the `sampart.tex` sample article (pages 361–363) for examples.

2. **Document classes.** $\mathcal{A}\mathcal{M}\mathcal{S}$ -L^AT_EX provides a number of document classes, including the $\mathcal{A}\mathcal{M}\mathcal{S}$ article document class, `amsart`, which allows the input of the title page information (author, address, e-mail, and so on) as separate entities. As a result, a journal can typeset even the title page of an article according to its own specifications without having to retype it.

Many users prefer the visual design of the `amsart` document class to the simpler design of the classical L^AT_EX `article` document class.

3. **Fonts.** There are hundreds of binary operations, binary relations, negated binary relations, bold symbols, arrows, extensible arrows, and so on, provided by $\mathcal{A}\mathcal{M}\mathcal{S}$ -L^AT_EX, which also makes available additional math alphabets such as Blackboard bold, Euler Fraktur, Euler Script, and math bold italic. Here are just a few examples:

$$\Leftarrow, \quad \blacktriangle, \quad \nexists, \quad \supsetneq, \quad \mathbb{A}, \quad \mathfrak{p}, \quad \mathcal{E}$$

We have barely scratched the surface of this truly powerful set of enhancements.

What is in the book?

Part I (Chapter 1) will help you get started quickly with L^AT_EX; if you read it carefully, you'll certainly be ready to start typing your first article and tackle L^AT_EX in more depth.

Part I guides you through:

- marking up text, which is quite easy;
- marking up math, which is not so straightforward (four sections ease you into mathematical typesetting: the first discusses the basic building blocks; the second shows how to build up a complicated formula in simple steps; the third is a formula gallery; and the fourth deals with equations and multiline formulas);
- the anatomy of an article;
- how to set up an article template;
- typing your first article.

Part II introduces the two most basic skills in depth: *typing text* and *typing math*.

Chapters 2 and 3 introduce *text* and *displayed text*. Chapter 2 is very important; when typing your L^AT_EX document, you spend most of your time typing text. The topics covered include special characters and accents, hyphenation, fonts, and spacing. Chapter 3 covers displayed text including *lists* and *tables*, and for the mathematician, proclamations (theorem-like structures) and proofs.

Chapters 4 and 5 discuss *math* and *displayed math*. Of course, typing math is the heart of any mathematical typesetting system. Chapter 4 discusses this topic in detail, including basic constructs, operators, delimiters, building new symbols, fonts, and grouping of equations. Chapter 5 presents one of the major contributions of $\mathcal{A}\mathcal{M}\mathcal{S}$ -L^AT_EX: aligned multiline formulas. This chapter also contains other multiline formulas.

Part III discusses the parts of a L^AT_EX document. In Chapter 6, you learn about the structure of a L^AT_EX document. The most important topics are sectioning and cross-referencing. In Chapter 7, the standard L^AT_EX document classes are presented: `article`, `report`, `book`, and `letter`, along with a description of the standard L^AT_EX distribution. In Chapter 8, the $\mathcal{A}\mathcal{M}\mathcal{S}$ document classes are discussed. In particular, the title page information for the `amsart` document class and a description of the standard $\mathcal{A}\mathcal{M}\mathcal{S}$ -L^AT_EX distribution is presented.

Part IV (Chapter 9) introduces techniques to *customize* L^AT_EX to speed up typing source files and typesetting of documents. L^AT_EX really speeds up with user-defined commands, user-defined environments, and custom formats. You'll learn how parameters that effect the behavior of L^AT_EX are stored in *counters* and *length commands*, how to change them, and how to design custom lists.

In Part V (Chapters 10 and 11), we'll discuss two programs: `BIBTEX` and *MakeIndex* that complement the standard `LATEX` distribution; they give a helping hand in making large bibliographies and indices.

Appendices A and B will probably be needed quite often in your work: they contain *math symbol tables* and *text symbol tables*.

Appendix C presents the `AMS-LATEX` sample article, `sampart.tex`, first in typeset form (pages 361–363), then in “mixed” form, showing the source file and the typeset article together (pages 364–371). You can learn a lot about `LATEX` and `AMS-LATEX` just by reading the source file a paragraph at a time and see how that paragraph looks typeset. Then Appendix D rewrites this sample article utilizing the user-defined commands collected in `lattice.sty` of section 9.5.

Appendix E relates some historical background material on `LATEX`: how did it develop and how does it work. Appendix F is a brief introduction to the use of PostScript fonts in a `LATEX` document. Appendix G shows how you can obtain `LATEX` and `AMS-LATEX`, and how you can keep them up-to-date through the Internet. A work session is reproduced (in part) using “anonymous ftp” (file transfer protocol).

Appendix H will help those who have worked with (Plain) `TEX`, `LATEX` version 2.09, `AMS-TEX`, or `AMS-LATEX` version 1.1, programs from which the new `LATEX` and `AMS-LATEX` developed. Some tips are given to smooth the transition to the new `LATEX` and `AMS-LATEX`.

Finally, Appendix I points the way for further study. The most important book for extending and customizing `LATEX` is *The L^AT_EX Companion*, the work of Michel Goossens, Frank Mittelbach, and Alexander Samarin [12].

Typographical conventions

To make this book easy to read, I use some very simple conventions on the use of fonts.

Explanatory text is set in the Galliard font, as this text is.

This book is about typesetting math in L^AT_EX. So often you are told to type in some material and shown how it'll look typeset.

I use this font, Computer Modern typewriter style, to show what you have to type. All characters have the same width so it's easy to distinguish it from the other fonts used in this book.

I use the same font for commands (`\parbox`), environments (`align`), documents (`sampart.tex`), document classes (`article`), directories and folders (`work`), counters (`tocdepth`), and so on.

The names of packages (`amsmath`), extensions of L^AT_EX, are printed in a sans serif font, as traditional.

┌

When I show you how something looks when typeset, I use this font, Computer Modern roman, which you'll most likely see when you use L^AT_EX. This looks sufficiently different from the other two fonts I use so that you should have little difficulty recognizing typeset L^AT_EX material. If the typeset material is a separate paragraph (or paragraphs), I make it visually stand out even more by adding the little corner symbols on the margin to offset it.

└

When I give explanations in the text: “Compare `iff` with `iff`, typed as `iff` and `if{f}`, respectively.” I use the same fonts but since they are not visually set off, it may be a little harder to see that `iff` is in Computer Modern roman and `iff` is in Computer Modern typewriter style.

Commands are introduced, as a rule, with examples:

`\\[0.5in]`

However, sometimes it's necessary to more formally define the syntax of a command. For instance:

`\\[length]`

where *length* is a *placeholder*: it represents the length you have to type in. I use the Computer Modern typewriter style italic font for placeholders.

PART I

A short course

Typing your first article

In this chapter, you'll start writing your first article. All you have to do is to type the (electronic) *source file*; L^AT_EX does the rest.

In the next few sections, I'll introduce you to the most important commands for typesetting text and math by working through examples. Go to the latter parts of this book for more detail.

The source file is made up of *text*, *math* (for instance, $\sqrt{5}$), and *instructions* to L^AT_EX. This is how you type the last sentence:

The source file is made up of `\emph{text}`, `\emph{math}` (for instance, `$\sqrt{5}$`), and `\emph{instructions}` to `\LaTeX`.

In this sentence,

The source file is made up of `\emph{text}`, `\emph{math}` (for instance,

is text,

`$\sqrt{5}$`

is math, and

`\emph{text}`

is an instruction (a command). Commands, as a rule, start with a backslash `\` and are meant to instruct L^AT_EX; this particular command, `\emph`, emphasizes *text* given as its *argument* (between the braces). Another kind of instruction is called an *environment*. For instance,

`\begin{flushright}`

and

`\end{flushright}`

bracket a `flushright` environment—what is typed inside this environment comes out right justified (lined up against the right margin) in the printed form.

In practice, text, math, and instructions are intertwined. For example,

`\emph{My first integral} $\int \zeta^2(x) \, dx$`

which produces

⌈
My first integral $\int \zeta^2(x) \, dx$
 ⌋

is a mixture of all three. Nevertheless, to some extent I try to introduce the three topics: typing text, typing math, and giving instructions to L^AT_EX (commands and environments) as if they were separate topics.

I introduce the basic features of L^AT_EX by working with a number of sample documents. If you wish to obtain these documents electronically, create a subdirectory (folder) on your computer, say, `ftp`, and proceed to download all the sample files as described in section G.6. Also create a subdirectory (folder) called `work`. Whenever you want to use one of these documents, copy it from the `ftp` subdirectory (folder) to the `work` subdirectory (folder), so that the original remains unchanged; alternatively, type in the examples as shown in the book. *In this book, the `ftp` directory and the `work` directory will refer to the directories (folders) you hereby create without further elaboration.*

1.1 Typing a very short “article”

First we discuss how to use the keyboard in L^AT_EX, and then type a very short “article” containing only text.

1.1.1 The keyboard

In L^AT_EX, to type text, use the following keys:

a-z A-Z 0-9
+ = * / () []

You may also use the punctuation marks

, ; . ? ! : ‘ ’ -

and the spacebar, the tab key, and the return (or enter) key.

There are thirteen special keys (on most keyboards):

\$ % & ~ _ ^ \ { } @ " |

used mostly in L^AT_EX instructions. There are special commands to type most of these special characters (as well as composite characters, such as accented characters) if you need them in text. For instance, \$ is typed as `\$`, _ is typed as `\_`, and % is typed as `\%` (while ä is typed as `\“{a}`); however, @ is typed as @. See sections 2.4.4 and 2.4.6 and the tables of Appendix B for more detail.

Every other key is prohibited! (Unless special steps are taken; more about this in section 2.1.) Do not use the computer’s modifier keys, such as Alt, Ctrl, Command, Option, to produce special characters. L^AT_EX will either reject or misunderstand them. When trying to typeset a source file that contains a *prohibited character*, L^AT_EX will display the error message:

```
! Text line contains an invalid character.
1.222 completely irreducible^^?
      ^^?
```

In this message 1.222 means line 222 of your source file. You must edit this line. The log file (see section 1.11.3) also contains this message.

1.1.2 Your first note

We start our discussion on how to type a note in L^AT_EX with a simple example. Suppose you want to use L^AT_EX to produce the following:

┌

It is of some concern to me that the terminology used in multi-section math courses is not uniform.

In several sections of the course on matrix theory, the term “hamiltonian-reduced” is used. I, personally, would rather call these “hyper-simple”. I invite others to comment on this problem.

Of special concern to me is the terminology in the course by Prof. Rudi Hochschwabauer. Since his field is new, there is no accepted terminology. It is imperative that we arrive at a satisfactory solution.

└

Create a new file in the work directory with the name `note1.tex` and type the following (if you prefer not to type it, copy the file from the `ftp` directory; see page 4):

```
% Sample file: note1.tex
% Typeset with LaTeX format
\documentclass{article}

\begin{document}
It is of some concern to me that
the terminology used in multi-section
math courses is not uniform.

In several sections of the course on
matrix theory, the term
‘‘hamiltonian-reduced’’ is used.
I, personally, would rather call these ‘‘hyper-simple’’. I
invite others to comment on this problem.

Of special concern to me is the terminology in the course
by Prof.~Rudi Hochschwabauer.
Since his field is new, there is
no accepted
terminology. It is imperative
that we arrive at a satisfactory solution.
\end{document}
```

The first two lines start with `%`; they are *comments* ignored by L^AT_EX. (The `%` character is very useful. If, for example, while typing the source file you want to make a comment, but do not want that comment to appear in the typeset version, start the line with `%`. The whole line will be ignored during typesetting. You can also comment out a part of a line:

```
... % ...
```

The part of a line past the `%` character will be ignored.)

The line after the two comments names the “document class”, which specifies how the document will be formatted.

The text of the note is typed within the “document environment”, that is, between the two lines

```
\begin{document}
and
\end{document}
```


Now typeset `note1.tex`; you should get the same typeset document as shown on page 5.

As seen in the previous example, L^AT_EX is somewhat different from most word processors. It ignores the way *you* format the text, and follows only the formatting instructions given by the markup commands. L^AT_EX takes note of whether you put a space in the text, but it ignores *how many spaces* are inserted. In L^AT_EX, one or more blank lines mark the end of a paragraph. Tabs are treated as spaces. Note that you typed the left double quote as ‘ ‘ (two left single quotes) and the right double quote as ’ ’ (two right single quotes). The left single quote key is not always easy to find; it usually hides in the upper left or upper right corner of the keyboard. The symbol ~ is called a “tie” and keeps Prof. and Rudi together.

1.1.3 Lines too wide

L^AT_EX reads the text in the source file one line at a time and when the end of a paragraph is reached, L^AT_EX typesets it (see section E.2 for a more detailed discussion). Most of the time, there is no need for corrective action. Occasionally, however, L^AT_EX gets into trouble splitting the paragraph into typeset lines. To illustrate this, modify `note1.tex`: in the second sentence replace “term” by “strange term”, and in the fourth sentence delete “Rudi ”. Save this modified file with the name `note1b.tex` in the `work` directory. (You’ll find `note1b.tex` in the `ftp` directory—see page 4).

Typesetting `note1b.tex`, you get:

┌

It is of some concern to me that the terminology used in multi-section math courses is not uniform.

In several sections of the course on matrix theory, the strange term “hamiltonian-reduced” is used. I, personally, would rather call these “hyper-simple”. I invite others to comment on this problem.

Of special concern to me is the terminology in the course by Prof. Hochschwabauer. Since his field is new, there is no accepted terminology. It is imperative that we arrive at a satisfactory solution.

└

The first line of paragraph two is about 1/4 inch too wide. The first line of paragraph three is even wider. On your monitor, L^AT_EX displays the message:

```
Overfull \hbox (15.38948pt too wide) in paragraph at lines 10--15
[]\OT1/cmr/m/n/10 In sev-eral sec-tions of the course on ma-trix
the-ory, the strange term ‘‘hamiltonian-
[]
```

```
Overfull \hbox (23.27834pt too wide) in paragraph at lines 16--22
[]\OT1/cmr/m/n/10 Of spe-cial con-cern to me is the ter-mi-nol-ogy
```

in the course by Prof. Hochschwabauer.

[]

You'll find the same message in the log file `note1b.log` (see section 1.11.3).

The reference

Overfull \hbox (15.38948pt too wide) in paragraph at lines 10--15

is made to paragraph two (lines 10–15); the typeset version has a line (line number unspecified within the typeset paragraph) which is 15.38948pt too wide. L^AT_EX uses *points* (pt) to measure distances; there are about 72 points to an inch. The next two lines

[]\OT1/cmr/m/n/10 In sev-eral sec-tions of the course on ma-trix the-ory, the strange term ‘‘hamiltonian-

identify the source of the problem: L^AT_EX would not hyphenate

hamiltonian-reduced,

since it (automatically) hyphenates a hyphenated word only at the hyphen. You may wonder what \OT1/cmr/m/n/10 signifies. It says that the current font is the Computer Modern roman font at size 10 points (see section 2.6.1).

The second reference

Overfull \hbox (23.27834pt too wide) in paragraph at lines 16--22

is made to paragraph three (lines 16–22). The problem is with the word

Hochschwabauer

which the hyphenation routine of L^AT_EX can't handle. (If you use a German hyphenation routine, it'll have no difficulty hyphenating Hochschwabauer.)

If you encounter such a problem, try to reword the sentence or add an optional hyphen \-, which encourages L^AT_EX to hyphenate at this point if necessary. For instance, rewrite Hochschwabauer as

Hoch\ -schwabauer

and the second problem goes away.

Sometimes a small horizontal overflow is difficult to spot. The draft document class option is very useful in this case: it'll paint an ugly slug on the margin to mark an overfull line; see sections 7.1.2 and 8.4 for document class options. You may invoke this option by changing the \documentclass line to

\documentclass[draft]{article}

You'll find this version of `note1b.tex` under the name `noteslug.tex` in the ftp directory.

1.1.4 More text features

Next you’ll produce the following note in L^AT_EX:

┌

November 5, 1995

From the desk of George Grätzer

February 7–21 *please* use my temporary e-mail address:

George_Gratzer@umanitoba.ca

└

Type in the following source file, save it as `note2.tex` in the work directory (you’ll also find `note2.tex` in the ftp directory):

```
% Sample file: note2.tex
% Typeset with LaTeX format
\documentclass{article}

\begin{document}
\begin{flushright}
  \today
\end{flushright}
\textbf{From the desk of George Gr\{"a\}tzer}\\"[10pt]

February~7--21 \emph{please} use my temporary e-mail address:
\begin{center}
  \texttt{George\_Gratzer@umanitoba.ca}
\end{center}
\end{document}
```

This note introduces several additional features of L^AT_EX:

- The `\today` command displays today’s date.
- Use environments to *right justify* or *center* text. Use the `\emph` command to *emphasize* text; the text to be emphasized is surrounded by `{` and `}`. Use `\textbf` for bold text; the text to be made bold is also surrounded by `{` and `}`. Similarly, use `\texttt` for typewriter style text. `\emph`, `\textbf`, and `\texttt` are examples of *commands with arguments*. Note that command names are case sensitive; do not type `\Textbf` or `\TEXTBF` in lieu of `\textbf`.
- L^AT_EX commands (almost) always start with `\` followed by the command name, for instance, `\textbf`. The command name is terminated by the first non-alphabetic character.

- Use double hyphens for number ranges (en-dash): 7--21 prints 7–21; use triple hyphens (---) for the “em-dash” punctuation mark—such as the one in this sentence.
- If you want to create additional space between lines (as in the last note under the line **From the desk . . .**), use the command `\\[10pt]` with an appropriate amount of vertical space. (`\\` is the newline command—see section 2.7.1; the variant used in the above example is the newline with additional vertical space.) The distance may be given in points, centimeters (cm), or inches (in). (72.27 points make an inch.)
- There are special rules for *accented characters* and some *European characters*. For instance, ä is typed as `\"a`. Accents are explained in section 2.4.6 (see also the tables in Appendix B).

You’ll seldom need to know more than this about typing text. For more detail, however, see Chapters 2 and 3. All text symbols are organized into tables in Appendix B.

1.2 Typing math

Now you can start mixing text with math formulas.

1.2.1 The keyboard

In addition to the regular text keys (section 1.1.1), three more keys are needed to type math:

| < >

(| is the shifted `\` key on many keyboards.)

1.2.2 A note with math

You’ll begin typesetting math with the following note:

┌

In first year Calculus, we define intervals such as (u, v) and (u, ∞) . Such an interval is a *neighborhood* of a if a is in the interval. Students should realize that ∞ is only a symbol, not a number. This is important since we soon introduce concepts such as $\lim_{x \rightarrow \infty} f(x)$.

When we introduce the derivative

$$\lim_{x \rightarrow a} \frac{f(x) - f(a)}{x - a},$$

we assume that the function is defined and continuous in a neighborhood of a .

└

To create the source file for this mixed math and text note, create a new document with an editor. Name it `math.tex`, place it in the work directory, and type in the following source file—or copy `math.tex` from the ftp directory:

```
% Sample file: math.tex
% Typeset with LaTeX format
\documentclass{article}

\begin{document}
In first year Calculus, we define intervals such as
$(u, v)$ and $(u, \infty)$. Such an interval is a
\emph{neighborhood} of $a$
if $a$ is in the interval. Students should
realize that $\infty$ is only a
symbol, not a number. This is important since
we soon introduce concepts
such as $\lim_{x \to \infty} f(x)$.

When we introduce the derivative
\[
\lim_{x \to a} \frac{f(x) - f(a)}{x - a},
\]
we assume that the function is defined and continuous
in a neighborhood of $a$.
\end{document}
```

This note introduces the basic techniques of typesetting math with L^AT_EX:

- There are two kinds of math formulas and environments: *inline* and *displayed*.
- *Inline* math environments open and close with \$.
- *Displayed* math environments open with \[and close with \].
- L^AT_EX ignores the spaces you insert in math environments with two exceptions: spaces that delimit commands (see section 2.3.1) and spaces in the argument of commands that temporarily revert into text mode. (\mbox is such a command; see section 4.5.) Thus spacing in math is important only for the readability of the source file. To summarize:

Rule ■ Spacing in text and math

In text mode, many spaces equal one space, while in math mode, the spaces are ignored.

- The same formula may be typeset differently depending on which math environment it's in. The expression $x \rightarrow a$ is typed as a subscript to lim in the inline

formula $\lim_{x \rightarrow a} f(x)$, typed as `\lim_{x \to a} f(x)`, but it's placed below `\lim` in the displayed version:

$$\lim_{x \rightarrow a} f(x)$$

typed as

```
\[
\lim_{x \to a} f(x)
\]
```

- A math symbol is invoked by a command. Examples: the command for ∞ is `\infty` and the command for $\rightarrow$ is `\to`. The math symbols are organized into tables in Appendix A.

To access most of the symbols listed in Appendix A by name, use the `amssymb` package; in other words, the article should start with

```
\documentclass{article}
\usepackage{amssymb}
```

The `amssymb` package loads the `amfonts` package, which contains the commands for using the AMSFonts (see section 4.14.2).

- Some commands such as `\sqrt` need *arguments* enclosed in `{` and `}`. To typeset $\sqrt{5}$, type `\sqrt{5}`, where `\sqrt` is the command and 5 is the argument. Some commands need more than one argument. To get

$$\frac{3+x}{5}$$

type

```
\[
\frac{3+x}{5}
\]
```

`\frac` is the command, `3+x` and `5` are the arguments.

There are many mistakes you can make, even in such a simple note. You'll now introduce mistakes in `math.tex`, by inserting and deleting `%` signs to make the mistakes visible to L^AT_EX one at a time. Recall that lines starting with `%` are ignored by L^AT_EX. Type the following source file, and save it under the name `mathb.tex` in the work directory (or copy over the file `mathb.tex` from the `ftp` directory).

```
% Sample file: mathb.tex
% Typeset with LaTeX format
\documentclass{article}
```

```

\begin{document}
In first year Calculus, we define intervals such as
%(u, v)$ and $(u, \infty)$. Such an interval is a
$(u, v)$ and $(u, \infty)$. Such an interval is a
{\emph{neighborhood}} of $a$
if $a$ is in the interval. Students should
realize that $\infty$ is only a
symbol, not a number. This is important since
we soon introduce concepts
such as $\lim_{x \to \infty} f(x)$.
%such as $\lim_{x \to \infty} f(x)$.

When we introduce the derivative
\[
\lim_{x \to a} \frac{f(x) - f(a)}{x - a}
%\lim_{x \to a} \frac{f(x) - f(a)}{x - a}
\]
we assume that the function is defined and continuous
in a neighborhood of $a$.
\end{document}

```

Exercise 1 Note that in line 8, the second \$ is missing. When you typeset the `mathb.tex` file, L^AT_EX sends the error message:

```

! Missing $ inserted.
<inserted text>
$
1.8 ..., v)$ and (u, \infty
)$. Such an interval is a
?

```

Since you omitted \$, L^AT_EX reads `(u, \infty)` as text; but the `\infty` command instructs L^AT_EX to typeset a math symbol, which can only be done in math mode. So L^AT_EX offers to put a \$ in front of `\infty`. L^AT_EX suggests a cure, but in this example it comes too late. Math mode should start just prior to `(u`.

Exercise 2 In the `mathb.tex` file, delete % at the beginning of line 7 and insert a % at the beginning of line 8 (this eliminates the previous error); delete % at the beginning of line 15 and insert a % at the beginning of line 14 (this introduces a new error: the closing brace of the subscript is missing). Save the changes, and typeset the note. You get the error message:

```

! Missing } inserted.
<inserted text>
}

```

```
1.15 ...im_{x \to \infty} f(x)$
```

```
?
```

L^AT_EX is telling you that a closing brace `}` is missing, but it's not sure where. L^AT_EX noticed that the subscript started with `{` and it reached the end of the math formula before finding `}`. You must look in the formula for a `{` that is not closed, and close it with `}`.

Exercise 3 Delete `%` at the beginning of line 14 and insert a `%` at the beginning of line 15, which removes the last error, and delete `%` at the beginning of line 20 and insert a `%` at the beginning of line 19 (introducing the final error: deleting the closing brace of the first argument of `\frac`). Save and typeset the file. You get the error message:

```
! LaTeX Error: Bad math environment delimiter.
```

```
1.21 \]
```

There is a bad math environment delimiter in line 21, namely, `\]`. So the reference to

```
! Bad math environment delimiter.
```

is to the displayed formula. Since the environment delimiter is correct, something must have gone wrong with the displayed formula. This is what happened: L^AT_EX was trying to typeset

```
\lim_{x \to a} \frac{f(x) - f(a)}{x - a}
```

but `\frac` needs two arguments. L^AT_EX found `f(x) - f(a)` `x - a` as the first argument. While looking for the second, it found `\]`, which is obviously an error (it was looking for a `{`).

1.2.3 Building blocks of a formula

A formula is built up from various types of components. We group them as follows:

- Arithmetic
- Subscripts and superscripts
- Accents
- Binomial coefficients
- Congruences
- Delimiters
- Operators
- Ellipses
- Integrals

- Matrices
- Roots
- Sums and products
- Text

Some of the commands in the following examples are defined in the `amsmath` package; in other words, to typeset these examples with the `article` document class, the article should start with

```
\documentclass{article}
\usepackage{amssymb,amsmath}
```

Arithmetic The arithmetic operations $a + b$, $a - b$, $-a$, a/b , ab are typed as expected:

```
$a + b$, $a - b$, $-a$, $a / b$, $a b$
```

If you wish to use $\cdot$ or $\times$ for multiplication, as in $a \cdot b$ or $a \times b$, use `\cdot` or `\times`, respectively. The expressions $a \cdot b$ and $a \times b$ are typed as follows:

```
$a \cdot b$  $a \times b$
```

Displayed fractions, such as

$$\frac{1 + 2x}{x + y + xy}$$

are typed with `\frac`:

```
\[
  \frac{1 + 2x}{x + y + xy}
\]
```

The `\frac` command is seldom used inline.

Subscripts and superscripts Subscripts are typed with `_` (underscore) and superscripts with `^` (caret). Remember to enclose the subscripts and superscripts with `{` and `}`. To get a_1 , type the following characters:

Go into inline math mode:	<code>\$</code>
type the letter a:	<code>a</code>
subscript command:	<code>_</code>
bracket the subscripted 1:	<code>{1}</code>
exit inline math mode:	<code>\$</code>

that is, type `$a_{1}$`. Omitting the braces in this example causes no harm; however, to get a_{10} , you *must* type `$a_{10}$`. Indeed, `$a_10$` prints a_10 . Further examples: a_{i_1} , a^2 , a^{i_1} are typed as

a_{i_1} , a^2 , a^{i_1}

Accents The four most often used math accents are:

$\bar{a}$ typed as `$\backslash\bar{a}$`

$\hat{a}$ typed as `$\backslash\hat{a}$`

$\tilde{a}$ typed as `$\backslash\tilde{a}$`

$\vec{a}$ typed as `$\backslash\vec{a}$`

Binomial coefficients The `amsmath` package provides the `\binom` command for binomial coefficients. For example, $\binom{a}{b+c}$ is typed inline as

`$\backslash\binom{a}{b + c}$`

whereas the displayed version

$$\binom{a}{b+c} \binom{\frac{n^2-1}{2}}{n+1}$$

is typed as

`$\backslash\binom{a}{b + c} \backslash\binom{\frac{n^2 - 1}{2}}{n + 1}$`

Congruences The two most important forms are:

$a \equiv v \pmod{\theta}$ typed as `$a \equiv v \pmod{\theta}$`
 $a \equiv v (\theta)$ typed as `$a \equiv v \pod{\theta}$`

The second form requires the `amsmath` package.

Delimiters These are parenthesis-like symbols that vertically expand to enclose a formula. For example: $(a+b)^2$, which is typed as `$(a + b)^2$` , and

$$\left(\frac{1+x}{2+y^2}\right)^2$$

which is typed as

`$\left(\frac{1 + x}{2 + y^2}\right)^2$`

contain such delimiters. The `\left(` and `\right)` commands tell L^AT_EX to size the parentheses correctly (relative to the size of the symbols inside the parentheses). Two further examples:

$$\left| \frac{a+b}{2} \right|, \quad \|A^2\|$$

would be typed as:

```
\[
  \left| \frac{a + b}{2} \right|,
  \quad \left\| A^2 \right\|
\]
```

where `\quad` is a spacing command (see section 4.11 and Appendix A).

Operators To typeset the sine function $\sin x$, type: `$\sin x$` . Note that `$\sin x$` prints: $\sin x$, where the typeface of $\sin$ is wrong, as is the spacing.

L^AT_EX calls `\sin` an *operator*; there are a number of operators listed in section 4.7.1 and Appendix A. Some are just like `\sin`; others produce a more complex display:

$$\lim_{x \rightarrow 0} f(x) = 0$$

which is typed as

```
\[
  \lim_{x \to 0} f(x) = 0
\]
```

Ellipses The ellipsis (...) in math sometimes needs to be printed as low dots and sometimes as (vertically) centered dots. Print low dots with the `\ldots` command as in $F(x_1, x_2, \dots, x_n)$, typed as

```
$F(x_{1}, x_{2}, \ldots , x_{n})$
```

Print centered dots with the `\cdots` command as in $x_1 + x_2 + \cdots + x_n$, typed as

```
$x_{1} + x_{2} + \cdots + x_{n}$
```

If you use the `amsmath` package, there is a good chance that the command `\dots` will print the ellipsis as desired.

Integrals The command for an integral is `\int`; the lower limit is a subscript and the upper limit is a superscript. Example: $\int_0^\pi \sin x \, dx = 2$ is typed as

```
$\int_0^{\pi} \sin x \, dx = 2$
```

`\,` is a spacing command (see section 4.11 and Appendix A).

Matrices The `amsmath` package provides you with a `matrix` environment:

$$\begin{matrix} a + b + c & uv & x - y & 27 \\ a + b & u + v & z & 134 \end{matrix}$$

which is typed as follows:

```
\[
\begin{matrix}
a + b + c & uv & x - y & 27 \\
a + b & u + v & z & 134
\end{matrix}
\]
```

The matrix elements are separated by `&`; the rows are separated by `\\`. The basic form gives no parentheses; for parentheses, use the `pmatrix` environment; for brackets, the `bmatrix` environment; for vertical lines (determinants, for example), the `vmatrix` environment; for double vertical lines, the `Vmatrix` environment. For example,

$$\mathbf{A} = \begin{pmatrix} a + b + c & uv \\ a + b & u + v \end{pmatrix} \begin{pmatrix} 30 & 7 \\ 3 & 17 \end{pmatrix}$$

is typed as follows:

```
\[
\mathbf{A} =
\begin{pmatrix}
a + b + c & uv \\
a + b & u + v
\end{pmatrix}
\begin{pmatrix}
30 & 7 \\
3 & 17
\end{pmatrix}
\]
```

Roots `\sqrt` produces the square root; for instance, $\sqrt{5}$ is typed as

```
\sqrt{5}
```

and $\sqrt{a + 2b}$ is typed as

```
\sqrt{a + 2b}
```

The n th root, $\sqrt[n]{5}$, is done with two arguments:

`\sqrt[n]{5}`

Note that the first argument is in brackets []; it's an *optional argument* (see section 2.3).

Sums and products The command for sum is `\sum` and for product is `\prod`. The examples

$$\sum_{i=1}^n x_i^2 \quad \prod_{i=1}^n x_i^2$$

are typed as

```
\[
\sum_{i=1}^n x_{i}^2 \quad \prod_{i=1}^n x_{i}^2
\]
```

`\quad` is a spacing command; it separates the two formulas (see section 4.1.1 and Appendix A).

Sums and products are examples of *large operators*; all of them are listed in section 4.8 and Appendix A. They display in a different style (and size) when used in an inline formula: $\sum_{i=1}^n x_i^2 \quad \prod_{i=1}^n x_i^2$.

Text Place text in a formula with an `\mbox` command. For instance,

$$a = b \quad \text{by assumption}$$

is typed as

```
\[
a = b \mbox{\quad by assumption}
\]
```

Note the space command `\quad` in the argument of `\mbox`. You could also have typed

```
\[
a = b \quad \mbox{by assumption}
\]
```

because `\quad` works in text as well as in math.

If you use the `amsmath` package, then the `\text` command is available in lieu of the `\mbox` command. It works just like the `\mbox` command except that it automatically changes the size of its argument as required, as in a^{power} , typed as

`$a^{\text{power}}$`

If you do not want to use the large `amsmath` package, the tiny `amstext` package also provides the `\text` command (see section 8.5).

1.2.4 Building a formula step-by-step

It is simple to build up complicated formulas from the components described in section 1.2.3. Take the formula

$$\sum_{i=1}^{\left[\frac{n}{2}\right]} \left(x_{i,i+1}^{i^2} \right) \frac{\sqrt{\mu(i)^{\frac{3}{2}}(i^2-1)}}{\sqrt[3]{\rho(i)-2} + \sqrt[3]{\rho(i)-1}}$$

for instance. You should build this up in several steps. Create a new file in the work directory. Call it `formula.tex` and type in the lines:

```
% File: formula.tex
% Typeset with LaTeX format
\documentclass{article}
\usepackage{amssymb,amsmath}
\begin{document}
\end{document}
```

and save it. At present, the file has an empty `document` environment.¹ Type each part of the formula as an inline or displayed formula so that you can typeset the document and check for errors.

Step 1 Let's start with $\left[\frac{n}{2}\right]$:

```
$\left[ \frac{n}{2} \right]$
```

Type this into `formula.tex` and test it by typesetting the document.

Step 2 Now you can do the sum:

$$\sum_{i=1}^{\left[\frac{n}{2}\right]}$$

For the superscript, you can cut and paste the formula created in Step 1 (without the dollar signs), to get

```
\[
\sum_{i = 1}^{\left[ \frac{n}{2} \right] }
\]
```

¹The quickest way to create this file is to open `mathb.tex`, save it under the new name `formula.tex`, and delete the lines in the `document` environment. Then add the line `\usepackage{amssymb,amsmath}`

Step 3 Next, do the two formulas in the binomial:

$$x_{i,i+1}^{i^2} \left[\frac{i+3}{3} \right]$$

Type them as separate formulas in `formula.tex`:

```
\[
  x_{i, i + 1}^{i^2} \quad \left[ \frac{i + 3}{3} \right]
\]
```

Step 4 Now it's easy to do the binomial. Type the following formula by cutting and pasting the previous formulas:

```
\[
  \binom{x_{i,i + 1}^{i^2}}{\left[ \frac{i + 3}{3} \right]}
\]
```

which prints:

$$\binom{x_{i,i+1}^{i^2}}{\left[\frac{i+3}{3}\right]}$$

Step 5 Next type the formula under the square root $\mu(i)^{\frac{3}{2}}(i^2 - 1)$ as

```
 $\mu(i)^{\frac{3}{2}} (i^2 - 1)$ 
```

and then the square root $\sqrt{\mu(i)^{\frac{3}{2}}(i^2 - 1)}$ as

```
 $\sqrt{\mu(i)^{\frac{3}{2}} (i^2 - 1)}$ 
```

Step 6 The two cube roots, $\sqrt[3]{\rho(i) - 2}$ and $\sqrt[3]{\rho(i) - 1}$, are easy to type:

```
 $\sqrt[3]{\rho(i) - 2}$     $\sqrt[3]{\rho(i) - 1}$ 
```

Step 7 So now get the fraction:

$$\frac{\sqrt{\mu(i)^{\frac{3}{2}}(i^2 - 1)}}{\sqrt[3]{\rho(i) - 2} + \sqrt[3]{\rho(i) - 1}}$$

typed, cut, and pasted as

```
\[
  \frac{\sqrt{\mu(i)^{\frac{3}{2}} (i^2 - 1)}}{\sqrt[3]{\rho(i) - 2} + \sqrt[3]{\rho(i) - 1}}
\]
```

Step 8 Finally, get the formula

$$\sum_{i=1}^{\left[\frac{n}{2}\right]} \binom{x_{i,i+1}^{i^2}}{\left[\frac{i+3}{3}\right]} \frac{\sqrt{\mu(i)^{\frac{3}{2}}(i^2-1)}}{\sqrt[3]{\rho(i)-2} + \sqrt[3]{\rho(i)-1}}$$

by cutting and pasting the pieces together, leaving only one pair of displayed math delimiters:

```
\[
  \sum_{i = 1}^{\left[\frac{n}{2}\right]} \binom{x_{i,i+1}^{i^2}}{\left[\frac{i+3}{3}\right]} \frac{\sqrt{\mu(i)^{\frac{3}{2}}(i^2-1)}}{\sqrt[3]{\rho(i)-2} + \sqrt[3]{\rho(i)-1}}
\]
```

Notice the use of

- spacing to help distinguish the braces (note that some editors help you balance the braces);
- separate lines for the various pieces.

Keep the source file readable. Of course, this is for your benefit, since L^AT_EX does not care. It would also accept

```
\[\sum_{i=1}^{\left[\frac{n}{2}\right]}\binom{x_{i,i+1}^{i^2}}{\left[\frac{i+3}{3}\right]}\frac{\sqrt{\mu(i)^{\frac{3}{2}}(i^2-1)}}{\sqrt[3]{\rho(i)-2}+\sqrt[3]{\rho(i)-1}}\]
```

Problems arise with this haphazard style when you make a mistake. Try to find the error in the next version:

```
\[\sum_{i=1}^{\left[\frac{n}{2}\right]}\binom{x_{i,i+1}^{i^2}}{\left[\frac{i+3}{3}\right]}\frac{\sqrt{\mu(i)^{\frac{3}{2}}(i^2-1)}}{\sqrt[3]{\rho(i)-2}+\sqrt[3]{\rho(i)-1}}\]
```

(Answer: $\frac{3}{2}$ should be followed by $\}$ and not by $\}$.)

1.3 Formula gallery

In this section, I present the formula gallery (gallery.tex in the ftp directory), a collection of formulas—some simple, some complex—that illustrate the power of L^AT_EX and $\mathcal{A}\mathcal{M}\mathcal{S}$ -L^AT_EX. Most of the commands in these examples have not yet been discussed, but comparing the source formula with the typeset version should answer most of your questions. Occasionally, I'll give you a helping hand with some comments.

Many of these formulas are from text books and research articles. The last six are reproduced from the document `testart.tex` that was distributed by the $\mathcal{A}\mathcal{M}\mathcal{S}$ with $\mathcal{A}\mathcal{M}\mathcal{S}$ - $\text{\LaTeX}$ version 1.1. Some of these examples require the `amssymb` and `amsmath` packages. So make sure to include the line

```
\usepackage{amssymb,amsmath}
```

following the `documentclass` line of any article using such constructs. The packages (if any) required for each formula shall be indicated.

Formula 1 A set-valued function:

$$x \mapsto \{c \in C \mid c \leq x\}$$

```
\[
  x \mapsto \{\, c \in C \mid c \leq x \,\}
\]
```

Note that both `|` and `\mid` print `|`. Use `|` for absolute value signs. In this formula, `\mid` is used because it provides extra spacing (see section 4.6.4). To equalize the spacing around $c \in C$ and $c \leq x$, a thin space was added inside each brace (see section 4.11). The same technique is used in a number of other formulas below.

Formula 2 The `\left|` and `\right|` commands print the vertical bars `|` whose size adjusts to the size of the formula. The `\mathfrak` command provides access to the *Fraktur math alphabet* (which requires the `amfonts` or the `eufrak` package):

$$\left| \bigcup (I_j \mid j \in J) \right| < \mathfrak{m}$$

typed as

```
\[
  \left| \bigcup (\, I_{\{j\}} \mid j \in J \,) \right|
  < \mathfrak{m}
\]
```

Formula 3 Note that you need spacing both before and after the text fragment “for some” in the following example. The argument of `\mbox` is typeset in text mode, so a single space is recognized.

$$A = \{x \in X \mid x \in X_i \text{ for some } i \in I\}$$

```
\[
  A = \{\, x \in X \mid x \in X_{\{i\}}
        \mbox{\quad for some } i \in I \,\}
\]
```

Formula 4 Space to show the logical structure:

$$\langle a_1, a_2 \rangle \leq \langle a'_1, a'_2 \rangle \quad \text{iff} \quad a_1 < a'_1 \quad \text{or} \quad a_1 = a'_1 \text{ and } a_2 \leq a'_2$$

```
\[
\langle a_{1}, a_{2} \rangle \leq \langle a'_{1}, a'_{2} \rangle
\quad \text{\mbox{iff}} \quad a_{1} < a'_{1} \quad \text{\mbox{or}}
\quad a_{1} = a'_{1} \text{ and } a_{2} \leq a'_{2}
\]
```

Note that in `if{f}` (in the argument of `\mbox`) the second `f` is in braces to avoid the use of the ligature—the merging of the two `f`'s (see section 2.4.5).

Formula 5 Here are some examples of Greek letters:

$$\Gamma_{u'} = \{ \gamma \mid \gamma < 2\chi, B_\alpha \not\subseteq u', B_\gamma \subseteq u' \}$$

```
\[
\Gamma_{u'} = \{ \gamma, \gamma \mid \gamma < 2\chi,
\ B_{\alpha} \not\subseteq u', \ B_{\gamma} \subseteq u' \}
\]
```

See Appendix A for a complete listing of Greek letters. The `\nsubseteq` command requires the `amssymb` package.

Formula 6 `\mathbb` gives the *Blackboard bold math alphabet* (available only in uppercase):

$$A = B^2 \times \mathbb{Z}$$

```
\[
A = B^2 \times \mathbb{Z}
\]
```

Blackboard bold requires the `amstext` package.

Formula 7 The `\left(` and `\right)` commands tell L^AT_EX to size the parentheses correctly (relative to the size of the symbols in the parentheses).

$$\left(\bigvee (s_i \mid i \in I) \right)^c = \bigwedge (s_i^c \mid i \in I)$$

```
\[
\left( \bigvee (\, s_{i} \mid i \in I \,) \right)^c =
\bigwedge (\, s_{i}^c \mid i \in I \,)
\]
```

Notice how the superscript is placed right on top of the subscript in s_i^c .

Formula 8

$$y \vee \bigvee ([B_\gamma] \mid \gamma \in \Gamma) \equiv z \vee \bigvee ([B_\gamma] \mid \gamma \in \Gamma) \pmod{\Phi^x}$$

```
\[
y \vee \bigvee (\,, [B_{\gamma}] \mid \gamma
\in \Gamma \,,) \equiv z \vee \bigvee (\,, [B_{\gamma}]
\mid \gamma \in \Gamma \,,) \pmod{\Phi^x}
\]
```

Formula 9 Use `\nolimits` so that the “limit” of the large operator is displayed as a subscript:

$$f(\mathbf{x}) = \bigvee_m \left(\bigwedge_m (x_j \mid j \in I_i) \mid i < \aleph_\alpha \right)$$

```
\[
f(\mathbf{x}) = \bigvee\nolimits_{\!\!\mathfrak{m}}
\left(\,,
\bigwedge\nolimits_{\!\!\mathfrak{m}}
(\,, x_{\mathfrak{j}} \mid j \in I_{\mathfrak{i}} \,,) \mid i < \aleph_{\alpha}
\,,\right)
\]
```

The `\mathfrak{m}` command requires the `amstons` or the `eufrak` package. A negative space (`\!`) was inserted to bring `m` a little closer to $\bigvee$ (see section 4.11).

Formula 10 The `\left.` command gives a blank left delimiter.

$$F(x)|_a^b = F(b) - F(a)$$

```
\[
\left. F(x) \right|_{\mathfrak{a}}^{\mathfrak{b}} = F(\mathfrak{b}) - F(\mathfrak{a})
\]
```

Formula 11

$$u + v \underset{\alpha} \sim w \overset{1}{\thicksim} z$$

```
\[
u \underset{\alpha}{+} v \overset{1}{\thicksim} w
\overset{2}{\thicksim} z
\]
```

The `\underset` and `\overset` commands require the `amsmath` package.

Formula 12 In this formula, `\mbox` would not work properly, so we use `\text`.

$$f(x) \stackrel{\text{def}}{=} x^2 - 1$$

```
\[
  f(x) \overset{\text{def}}{=} x^{2} - 1
\]
```

This formula requires the `amsmath` package.

Formula 13

$$\overbrace{a + b + \cdots + z}^n$$

```
\[
  \overbrace{a + b + \cdots + z}^n
\]
```

Formula 14

$$\begin{vmatrix} a+b+c & uv \\ a+b & c+d \end{vmatrix} = 7$$

```
\[
  \begin{vmatrix}
    a + b + c & uv \\
    a + b & c + d
  \end{vmatrix}
  = 7
\]
```

$$\left\| \begin{vmatrix} a+b+c & uv \\ a+b & c+d \end{vmatrix} \right\| = 7$$

```
\[
  \begin{Vmatrix}
    a + b + c & uv \\
    a + b & c + d
  \end{Vmatrix}
  = 7
\]
```

The `vmatrix` and `Vmatrix` environments require the `amsmath` package.

Formula 15 The `\mathbf{N}` command makes a bold N. (`\textbf{N}` would use a different font, namely, N.)

$$\sum_{j \in \mathbf{N}} b_{ij} \hat{y}_j = \sum_{j \in \mathbf{N}} b_{ij}^{(\lambda)} \hat{y}_j + (b_{ii} - \lambda_i) \hat{y}_i \hat{y}$$

```
\[
\sum_{j \in \mathbf{N}} b_{ij} \hat{y}_{j} =
\sum_{j \in \mathbf{N}} b^{(\lambda)}_{ij} \hat{y}_{j} +
(b_{ii} - \lambda_i) \hat{y}_i \hat{y}
\]
```

Formula 16 To produce the formula:

$$\left(\prod_{j=1}^n \hat{x}_j \right) H_c = \frac{1}{2} \hat{k}_{ij} \det \hat{\mathbf{K}}(i|i)$$

try

```
\[
\left( \prod_{j=1}^n \hat{x}_{j} \right) H_{c} =
\frac{1}{2} \hat{k}_{ij} \det \hat{\mathbf{K}}(i|i)
\]
```

However, this produces:

$$\left(\prod_{j=1}^n \hat{x}_j \right) H_c = \frac{1}{2} \hat{k}_{ij} \det \hat{\mathbf{K}}(i|i)$$

Correct the overly large parentheses by using the `\biggl` and `\biggr` commands in place of `\left` and `\right`, respectively (see section 4.6.2). Adjust the small hat over K by using `\widehat`:

```
\[
\biggl( \prod_{j=1}^n \hat{x}_{j} \biggr) H_{c} =
\frac{1}{2} \hat{k}_{ij} \det \widehat{\mathbf{K}}(i|i)
\]
```

Formula 17 In this formula, use `\overline{I}` to get $\bar{I}$ (the variant `\bar{I}`, which prints $\bar{I}$, is less pleasing to me):

$$\det \mathbf{K}(t = 1, t_1, \dots, t_n) = \sum_{I \in \mathbf{n}} (-1)^{|I|} \prod_{i \in I} t_i \prod_{j \in I} (D_j + \lambda_j t_j) \det \mathbf{A}^{(\lambda)}(\bar{I}|\bar{I}) = 0$$

```
\[
\det \mathbf{K} (t = 1, t_{\{1\}}, \dots, t_{\{n\}}) =
\sum_{I \in \mathbf{n}} (-1)^{|I|}
\prod_{i \in I} t_{\{i\}}
\prod_{j \in I} (D_{\{j\}} + \lambda_{\{j\}} t_{\{j\}})
\det \mathbf{A}^{\{\lambda\}} (\overline{I} \mid \overline{I}) = 0
\]
```

Formula 18 Note that `\|` provides the $\|$ math symbol in this formula:

$$\lim_{(v,v') \rightarrow (0,0)} \frac{H(z+v) - H(z+v') - BH(z)(v-v')}{\|v-v'\|} = 0$$

```
\[
\lim_{(v, v') \to (0, 0)}
\frac{H(z + v) - H(z + v') - BH(z)(v - v')}{\|v - v'\|} = 0
\]
```

Formula 19 This formula uses the calligraphic math alphabet:

$$\int_{\mathcal{D}} |\overline{\partial} u|^2 \Phi_0(z) e^{\alpha|z|^2} \geq c_4 \alpha \int_{\mathcal{D}} |u|^2 \Phi_0 e^{\alpha|z|^2} + c_5 \delta^{-2} \int_A |u|^2 \Phi_0 e^{\alpha|z|^2}$$

```
\[
\int_{\mathcal{D}} |\overline{\partial} u|^2 \Phi_0(z) e^{\alpha|z|^2} \geq
c_4 \alpha \int_{\mathcal{D}} |u|^2 \Phi_0 e^{\alpha|z|^2} + c_5 \delta^{-2} \int_A
|u|^2 \Phi_0 e^{\alpha|z|^2}
\]
```

Formula 20 The `\hdotsfor` command places dots spanning multiple columns in a matrix.

The `\dfrac` command is the displayed variant of `\frac` (see section 4.4.1).

$$\mathbf{A} = \begin{pmatrix} \frac{\varphi \cdot X_{n,1}}{\varphi_1 \times \varepsilon_1} & (x + \varepsilon_2)^2 & \cdots & (x + \varepsilon_{n-1})^{n-1} & (x + \varepsilon_n)^n \\ \frac{\varphi \cdot X_{n,1}}{\varphi_2 \times \varepsilon_1} & \frac{\varphi \cdot X_{n,2}}{\varphi_2 \times \varepsilon_2} & \cdots & (x + \varepsilon_{n-1})^{n-1} & (x + \varepsilon_n)^n \\ \hdotsfor{5} \\ \frac{\varphi \cdot X_{n,1}}{\varphi_n \times \varepsilon_1} & \frac{\varphi \cdot X_{n,2}}{\varphi_n \times \varepsilon_2} & \cdots & \frac{\varphi \cdot X_{n,n-1}}{\varphi_n \times \varepsilon_{n-1}} & \frac{\varphi \cdot X_{n,n}}{\varphi_n \times \varepsilon_n} \end{pmatrix} + \mathbf{I}_n$$

```
\[
\mathbf{A} =
\begin{pmatrix}
\end{pmatrix}
```

```

\frac{\varphi \cdot X_{n, 1}}
{\varphi_1 \times \varepsilon_1}
& (x + \varepsilon_2)^2 & \cdots
& (x + \varepsilon_{n-1})^{n-1}
& (x + \varepsilon_n)^n \\
\frac{\varphi \cdot X_{n, 1}}
{\varphi_2 \times \varepsilon_1}
& \frac{\varphi \cdot X_{n, 2}}
{\varphi_2 \times \varepsilon_2}
& \cdots & (x + \varepsilon_{n-1})^{n-1}
& (x + \varepsilon_n)^n \\
\hdotsfor{5} \\
\frac{\varphi \cdot X_{n, 1}}
{\varphi_n \times \varepsilon_1}
& \frac{\varphi \cdot X_{n, 2}}
{\varphi_n \times \varepsilon_2}
& \cdots & \frac{\varphi \cdot X_{n, n-1}}
{\varphi_n \times \varepsilon_{n-1}}
& \frac{\varphi \cdot X_{n, n}}
{\varphi_n \times \varepsilon_n} \\
\end{pmatrix}
+ \mathbf{I}_n
\]
```

This formula requires the `amsmath` and the `amssymb` packages. I'll show in section 9.1.2 how to write this formula so that it's short and more readable.

1.4 Typing equations and aligned formulas

1.4.1 Equations

The `equation` environment creates a displayed math formula and automatically generates a number. The equation

$$(1) \quad \int_0^\pi \sin x \, dx = 2$$

is typed as

```

\begin{equation} \label{E:firstInt}
\int_0^\pi \sin x \, dx = 2
\end{equation}
```

Of course, the number generated depends on how many equations precede the given one.

To refer to this formula without having to remember a (changeable) number, assign a *name* to the equation in the argument of a `\label` command; I'll call the name of the equation a *label*. In this section, let's call the first equation “firstInt” (first integral). I use the convention that the label of an equation starts with “E:”.

The number of this formula is referenced with the `\ref` command. For example, to get the reference “see (1)”, type

```
see~(\ref{E:firstInt})
```

Alternatively, with the `amsmath` package, you can use the `\eqref` command. For instance,

```
see~\eqref{E:firstInt}
```

also produces “see (1)”.

An advantage of this cross-referencing system is that if a new equation is introduced, or the existing equations are rearranged, the numbering will automatically be adjusted to reflect these changes.

Rule ■ Typeset twice

For renumbering to work, you have to typeset the source file twice.

See sections 6.3.2 and E.2.4. L^AT_EX will send a warning if you forget.

At the end of the typesetting, L^AT_EX stores the labels in the aux file (see section 1.11.3). For every label, it stores the number the label is associated with and also the page number on which the label occurs in the typeset version.

An equation will be numbered whether or not there is a `\label` command attached to it. Of course, if there is no `\label` command, the number generated by L^AT_EX for the equation can't be referenced automatically.

The system described here is called *symbolic referencing*. The argument of `\label` is the “symbol” for the number, and `\ref` provides the referencing. L^AT_EX uses the same mechanism for all numberings it automatically generates: numbering of section titles, equations, theorems, lemmas, and bibliographic references—except that for bibliographic references the commands are `\bibitem` and `\cite`, respectively (see section 1.7.4).

With the `amsmath` package, equations can also be *tagged* by attaching a name to the formula with the `\tag` command; the tag replaces the number.

Example:

(Int)
$$\int_0^\pi \sin x \, dx = 2$$

is typed as


```
\begin{equation}
\int_0^{\pi} \sin x \, dx = 2 \tag{Int}
\end{equation}
```

Tags (of the type discussed here) are **absolute**; this equation is always referred to as (Int). Equation numbers, on the other hand, are **relative**; they change as equations are added, deleted, or rearranged.

1.4.2 Aligned formulas

L^AT_EX, with the help of the `amsmath` package, has many ways to typeset multiline formulas. Right now, you'll be introduced to three constructs: *simple align*, *annotated align*, and *cases*; see Chapter 5 for a discussion of many others.

The `align` math environment is used for simple and annotated align. *Each line* in this environment is an equation, which L^AT_EX automatically numbers.

Simple align

Simple align is used to align two or more formulas. To obtain the formulas

$$\begin{aligned} (2) \quad & r^2 = s^2 + t^2 \\ (3) \quad & 2u + 1 = v + w^\alpha \\ (4) \quad & x = \frac{y + z}{\sqrt{s + 2u}} \end{aligned}$$

type (using `\` as a line separator)

```
\begin{align}
r^2 \quad & \&= \quad s^2 + t^2 & \tag{E:eqn1} \\
2u + 1 \quad & \&= \quad v + w^\alpha & \tag{E:eqn2} \\
x \quad & \&= \quad \frac{y + z}{\sqrt{s + 2u}} & \tag{E:eqn3}
\end{align}
```

(These equations are numbered (2), (3), and (4) because they are preceded by one numbered equation earlier in this section.)

The `align` environment can also be used to break a long formula into two. Since numbering both lines is undesirable, you may prevent the numbering of the second line with the `\notag` command.

$$\begin{aligned} (5) \quad h(x) &= \int \left(\frac{f(x) + g(x)}{1 + f^2(x)} + \frac{1 + f(x)g(x)}{\sqrt{1 - \sin x}} \right) dx \\ &= \int \frac{1 + f(x)}{1 + g(x)} dx - 2 \tan^{-1}(x - 2) \end{aligned}$$

This formula may be typed as

```

\begin{align} \label{E:longInt}
h(x) &= \int
\left(
\frac{f(x) + g(x)}{1 + f^2(x)}
+ \frac{1 + f(x)g(x)}{\sqrt{1 - \sin x}}
\right) dx \\
&= \int \frac{1 + f(x)}{1 + g(x)}
dx - 2 \tan^{-1}(x-2) \notag
\end{align}

```

See the `split` subsidiary math environment in section 5.5.2 for a better way to split a long formula into (two or more) aligned parts, and on how to center the formula number (5) between the two lines.

The rules are easy for simple align:

Rule ■ Simple align

- Separate the lines with `\\`.
 - In each line, indicate the alignment point with `&`.
 - Place a `\notag` in each line that you do not wish numbered.
 - Place a `\label` in each numbered line you may want to reference with `\ref` or `\eqref`.
-

Annotated align

Annotated align will align the formulas and the annotation (explanatory text) separately:

$$\begin{array}{ll}
 (6) & x = x \wedge (y \vee z) & \text{(by distributivity)} \\
 & = (x \wedge y) \vee (x \wedge z) & \text{(by condition (M))} \\
 & = y \vee z. &
 \end{array}$$

This is typed as:

```

\begin{align} \label{E:DoAlign}
x &= x \wedge (y \vee z)
& & \text{(by distributivity)} \\
&= (x \wedge y) \vee (x \wedge z)
& & \text{(by condition (M))} \notag \\
&= y \vee z. \notag
\end{align}

```

The rules for annotated align are similar to the rules of simple align. In each line, in addition to the alignment point (marked by &), there is also a mark for the start of the annotation: & &.

The align environment does much more than simple and annotated aligns (see section 5.4).

Cases

The cases construct is a *subsidiary math environment*; it must be used in a displayed math environment or in an equation environment (see section 5.5). Here is a typical example:

$$f(x) = \begin{cases} -x^2, & \text{if } x < 0; \\ \alpha + x, & \text{if } 0 \leq x \leq 1; \\ x^2, & \text{otherwise.} \end{cases}$$

which may be typed as follows:

```
\[
  f(x)=
  \begin{cases}
    -x^{2}, & \&\text{if } \$x < 0\$;}\&\\
    \alpha + x, & \&\text{if } \$0 \leq x \leq 1\$;}\&\\
    x^{2}, & \&\text{otherwise.}\&
  \end{cases}
\]
```

The rules for cases are simple:

Rule ■ cases

- Separate the lines with \&.
 - In each line, indicate the alignment point for the annotation with &.
-

1.5 The anatomy of an article

The `sampart.tex` sample article (typeset on pages 361–363) uses the $\mathcal{A}\mathcal{M}\mathcal{S}$ article document class, `amsart`. In this introductory chapter, I want to start off with the popular `article` document class of L^AT_EX, which is easier to use. So we'll use a simplified and shortened sample article, `intrart.tex` (in the `ftp` directory). Type it in as we discuss the parts of an article.

The *preamble* of an article is the initial part of the source file up to the line

```
\begin{document}
```

See Figure 1.1. The preamble contains instructions for the entire article, for instance, the

```
\documentclass
```

command.

Here is the preamble of the introductory sample article:

```
% Introductory sample article: intrart.tex
% Typeset with LaTeX format
```

```
\documentclass{article}
\usepackage{amssymb,amsmath}
\newtheorem{theorem}{Theorem}
\newtheorem{definition}{Definition}
\newtheorem{notation}{Notation}
```

The preamble names the document class, `article`, and then names the $\text{\LaTeX}$ enhancements, or packages, used by the article. This article loads two packages:

The `amssymb` package provides the names of all the math symbols in Appendix A and the `amsmath` package provides many of the math constructs used.

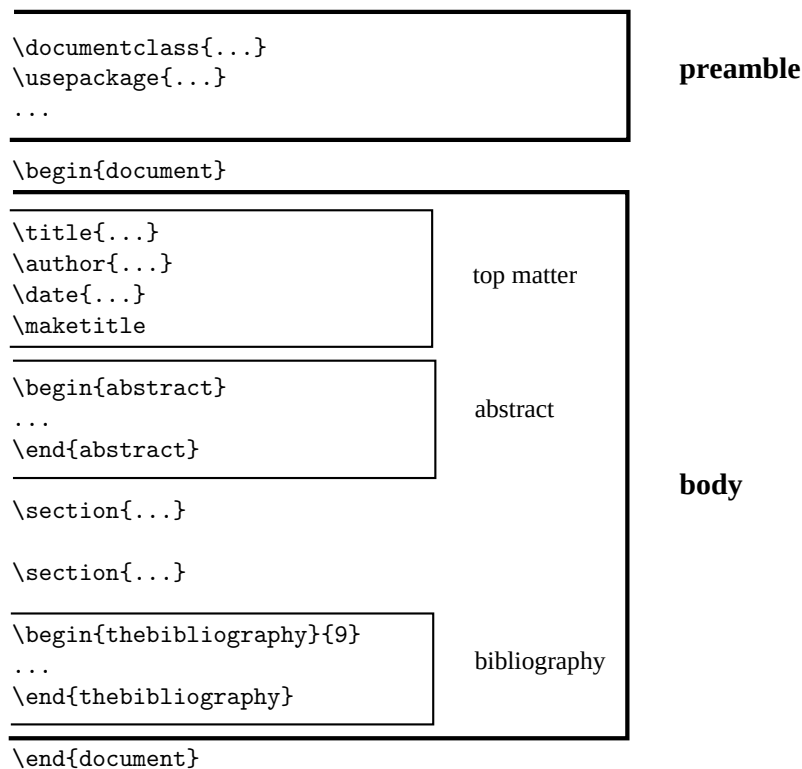


Figure 1.1: A schematic view of an article

A *proclamation* is a theorem, definition, corollary, note, and so on. In the preamble, three proclamations are defined. For instance,

```
\newtheorem{theorem}{Theorem}
```

defines the `theorem` environment, which you can use in the body of your article (see section 1.7.3). L^AT_EX will automatically number and visually format the theorems.

The article proper, called the *body* of the article, is contained in the document environment, that is, between the lines

```
\begin{document}
```

and

```
\end{document}
```

as illustrated in Figure 1.1. The body of the article is also logically split up into several parts; we'll discuss these in detail in section 6.1.

The body of the article starts with the *top matter*, which contains the “title page” information. It follows the line:

```
\begin{document}
```

and concludes with the line

```
\maketitle
```

Here is the top matter of the introductory sample article:

```
\title{A construction of complete-simple\\
        distributive lattices}
\author{George~A. Menuhin\thanks{Research supported
        by the NSF under grant number~23466.}\\
        Computer Science Department\\
        University of Winnebago\\
        Winnebago, Minnesota 23714\\
        \texttt{menuhin@ccw.uwinnebago.edu}}
\date{March 15, 1995}
\maketitle
```

The body continues with an (optional) abstract, contained in an abstract environment:

```
\begin{abstract}
```

In this note we prove that there exist `\emph{complete-simple distributive lattices}`, that is, complete distributive lattices in which there are only two complete congruences.

```
\end{abstract}
```

And here is the rest of the body of the introductory sample article:

```
\section{Introduction} \label{S:intro}
In this note we prove the following result:

\begin{theorem}
  There exists an infinite complete distributive lattice  $K$ 
  with only the two trivial complete congruence relations.
\end{theorem}

\section{The  $\prod_{i \in I} D_i$  construction} \label{S:P*}
The following construction is crucial in our proof of our Theorem:

\begin{definition} \label{D:P*}
  Let  $D_i$ ,  $i \in I$ , be complete distributive
  lattices satisfying condition~\textup{(J)}. Their
   $\prod_{i \in I} D_i$  product is defined as follows:
  \[
    \prod_{i \in I} (D_i \mid i \in I) =
    \prod_{i \in I} (D_i^{\{-\}} \mid i \in I) + 1;
  \]
  that is,  $\prod_{i \in I} (D_i \mid i \in I)$  is
   $\prod_{i \in I} (D_i^{\{-\}} \mid i \in I)$  with a new unit element.
\end{definition}

\begin{notation}
  If  $i \in I$  and  $d \in D_i^{\{-\}}$ , then
  \[
    \langle \dots, 0, \dots, \overset{i}{d}, \dots, 0,
    \dots \rangle
  \]
  is the element of  $\prod_{i \in I} (D_i \mid i \in I)$  whose
   $i$ th component is  $d$  and all the other components
  are  $0$ .
\end{notation}

See also Ernest~T. Moynahan~\cite{eM57a}.

Next we verify the following result:

\begin{theorem} \label{T:P*}
  Let  $D_i$ ,  $i \in I$ , be complete distributive
  lattices satisfying condition~\textup{(J)}. Let  $\Theta$ 
  be a complete congruence relation on
```

$\Pi^{\ast} (D_i \mid i \in I)$.

If there exists an $i \in I$ and a $d \in D_i$ with $d < 1_i$ such that for all $d \leq c < 1_i$,

$$\langle \dots, 0, \dots, \overset{i}{d}, \dots, 0, \dots \rangle \equiv \langle \dots, 0, \dots, \overset{i}{c}, \dots, 0, \dots \rangle \pmod{\Theta},$$

then $\Theta = \iota$.

Proof. Since

$$\langle \dots, 0, \dots, \overset{i}{d}, \dots, 0, \dots \rangle \equiv \langle \dots, 0, \dots, \overset{i}{c}, \dots, 0, \dots \rangle \pmod{\Theta},$$

and Θ is a complete congruence relation, it follows from condition~(C) that

$$\begin{aligned} & \langle \dots, 0, \dots, \overset{i}{d}, \dots, 0, \dots \rangle \equiv \\ & \langle \dots, 0, \dots, \overset{i}{c}, \dots, 0, \dots \rangle \pmod{\Theta} \end{aligned}$$

Let $j \in I$, $j \neq i$, and let $a \in D_j$.

Meeting both sides of the congruence $\text{\eqref{E:cong2}}$ with $\langle \dots, 0, \dots, \overset{j}{a}, \dots, 0, \dots \rangle$, we obtain

$$\begin{aligned} 0 &= \langle \dots, 0, \dots, \overset{i}{d}, \dots, 0, \dots \rangle \wedge \langle \dots, 0, \dots, \overset{j}{a}, \dots, 0, \dots \rangle \equiv \\ & \langle \dots, 0, \dots, \overset{i}{c}, \dots, 0, \dots \rangle \wedge \langle \dots, 0, \dots, \overset{j}{a}, \dots, 0, \dots \rangle \pmod{\Theta} \end{aligned}$$

Using the completeness of Θ and $\text{\eqref{E:comp}}$, we get:

[

```

0 \equiv \bigvee ( \langle \dots, 0, \dots, \overset{j}{a},
\dots, 0, \dots \rangle \mid a \in D_{j}^{-} ) = 1 \pmod{\Theta},
\]
hence  $\Theta = \iota$ .

\begin{thebibliography}{9}
\bibitem{sF90}
Soo-Key Foo, \emph{Lattice constructions}, Ph.D. thesis,
University of Winnebago, Winnebago MN, December 1990.
\bibitem{gM68}
George~A. Menuhin, \emph{Universal Algebra}, D.~van Nostrand,
Princeton-Toronto-London-Mel~-bourne, 1968.
\bibitem{eM57}
Ernest~T. Moynahan, \emph{On a problem of M.~H. Stone}, Acta
Math. Acad. Sci. Hungar. \textbf{8} (1957), 455--460.
\bibitem{eM57a}
Ernest~T. Moynahan, \emph{Ideals and congruence relations in
lattices. II}, Magyar Tud. Akad. Mat. Fiz. Oszt. K\o{}zl.
\textbf{9} (1957), 417--434.
\end{thebibliography}

```

At the end of the body, the *bibliography* is typed between the lines

```

\begin{thebibliography}{9}
\end{thebibliography}

```

The argument “9” of the `thebibliography` environment tells L^AT_EX to make room for single digit numbering, since in this article there are fewer than 10 articles. In the typeset article, the bibliography is entitled “References”.

Observe that we refer to condition (J) in the definition as `\textup{(J)}`. We do this so that if the text of the definition is emphasized (as it is), then (J) should still be typeset as (J) and not as *(J)*; see section 2.6.4 for the `\textup` command.

1.5.1 The typeset article

Here is the typeset introductory sample article (note that the equation numbers are on the right, the default in the `article` document class; elsewhere in this book you find the $\mathcal{MS}$ default, equations on the left—see sections 7.1.2 and 8.4 on how to change the default).

A construction of complete-simple distributive lattices

George A. Menuhin*
Computer Science Department
Winnebago, Minnesota 23714
menuhin@ccw.uwinnebago.edu

March 15, 1995

Abstract

In this note we prove that there exist *complete-simple distributive lattices*, that is, complete distributive lattices in which there are only two complete congruences.

1 Introduction

In this note we prove the following result:

Theorem 1 *There exists an infinite complete distributive lattice K with only the two trivial complete congruence relations.*

2 The Π^* construction

The following construction is crucial in our proof of our Theorem:

Definition 1 *Let D_i , $i \in I$, be complete distributive lattices satisfying condition (J). Their Π^* product is defined as follows:*

$$\Pi^*(D_i \mid i \in I) = \Pi(D_i^- \mid i \in I) + 1;$$

that is, $\Pi^(D_i \mid i \in I)$ is $\Pi(D_i^- \mid i \in I)$ with a new unit element.*

Notation 1 *If $i \in I$ and $d \in D_i^-$, then*

$$\langle \dots, 0, \dots, \overset{i}{d}, \dots, 0, \dots \rangle$$

is the element of $\Pi^(D_i \mid i \in I)$ whose i th component is d and all the other components are 0.*

*Research supported by the NSF under grant number 23466.

See also Ernest T. Moynahan [4].

Next we verify the following result:

Theorem 2 *Let D_i , $i \in I$, be complete distributive lattices satisfying condition (J). Let Θ be a complete congruence relation on $\Pi^*(D_i \mid i \in I)$. If there exists an $i \in I$ and a $d \in D_i$ with $d < 1_i$ such that for all $d \leq c < 1_i$,*

$$\langle \dots, 0, \dots, \overset{i}{d}, \dots, 0, \dots \rangle \equiv \langle \dots, 0, \dots, \overset{i}{c}, \dots, 0, \dots \rangle \pmod{\Theta}, \quad (1)$$

then $\Theta = \iota$.

Proof. Since

$$\langle \dots, 0, \dots, \overset{i}{d}, \dots, 0, \dots \rangle \equiv \langle \dots, 0, \dots, \overset{i}{c}, \dots, 0, \dots \rangle \pmod{\Theta}, \quad (2)$$

and Θ is a complete congruence relation, it follows from condition (C) that

$$\begin{aligned} \langle \dots, \overset{i}{d}, \dots, 0, \dots \rangle &\equiv \\ \bigvee (\langle \dots, 0, \dots, \overset{i}{c}, \dots, 0, \dots \rangle \mid d \leq c < 1) &\equiv 1 \pmod{\Theta}. \end{aligned} \quad (3)$$

Let $j \in I$, $j \neq i$, and let $a \in D_j^-$. Meeting both sides of the congruence (2) with $\langle \dots, 0, \dots, \overset{j}{a}, \dots, 0, \dots \rangle$, we obtain

$$\begin{aligned} 0 &= \langle \dots, 0, \dots, \overset{i}{d}, \dots, 0, \dots \rangle \wedge \langle \dots, 0, \dots, \overset{j}{a}, \dots, 0, \dots \rangle \equiv \\ &\langle \dots, 0, \dots, \overset{j}{a}, \dots, 0, \dots \rangle \pmod{\Theta}, \end{aligned} \quad (4)$$

Using the completeness of Θ and (4), we get:

$$0 \equiv \bigvee (\langle \dots, 0, \dots, \overset{j}{a}, \dots, 0, \dots \rangle \mid a \in D_j^-) = 1 \pmod{\Theta},$$

hence $\Theta = \iota$.

References

- [1] Soo-Key Foo, *Lattice Constructions*, Ph.D. thesis, University of Winnebago, Winnebago, MN, December 1990.
- [2] George A. Menuhin, *Universal Algebra*, D. van Nostrand, Princeton-Toronto-London-Melbourne, 1968.
- [3] Ernest T. Moynahan, *On a problem of M. H. Stone*, Acta Math. Acad. Sci. Hungar. **8** (1957), 455–460.
- [4] Ernest T. Moynahan, *Ideals and congruence relations in lattices. II*, Magyar Tud. Akad. Mat. Fiz. Oszt. Közl. **9** (1957), 417–434.

1.6 Article templates

Before you start writing your first article, I suggest you create two article templates for your own use.

There are two templates for articles written in the `article` document class in this book: `article.tpl` for articles with one author and `article2.tpl` for articles with two authors.² You can find these in the `ftp` directory (see page 4). So copy `article.tpl` into the work directory or type it in as follows:

```
% Sample file: article.tpl
% Typeset with LaTeX format

\documentclass{article}
\usepackage{amsmath,amssymb}

\newtheorem{theorem}{Theorem}
\newtheorem{lemma}{Lemma}
\newtheorem{proposition}{Proposition}
\newtheorem{definition}{Definition}
\newtheorem{corollary}{Corollary}
\newtheorem{notation}{Notation}

\begin{document}
\title{%
  titleline1\\
  titleline2}
\author{name\thanks{support}}\\
  addressline1\\
  addressline2\\
  addressline3}
\date{date}
\maketitle

\begin{abstract}
  abstract
\end{abstract}

\begin{thebibliography}{99}

\end{thebibliography}
\end{document}
```

²In section 8.3, we discuss a template file, `amsart.tpl`, for the $\mathcal{A}\mathcal{M}\mathcal{S}$ document class `amsart`.

Now copy `article2.tpl` into the work directory, or type it in. It is identical to `article.tpl` except for the argument of the `\author` command:

```
\author{name1\thanks{support1}\\
  address1line1\\
  address1line2\\
  address1line3
\and
name2\thanks{support2}\\
address2line1\\
address2line2\\
address2line3}
```

Note the `\and` command; it separates the two authors.

Now let's customize the template files. Open `article.tpl` and save it under a name of your choosing; I saved it under the name `ggart.tpl` (in the `ftp` directory—see page 4). In this personalized template file, I edit the top matter:

```
\title{titleline1\\
  titleline2}
\author{G. Gr\"{a}tzer\thanks{Research supported by the
  NSERC of Canada.}\\
  University of Manitoba\\
  Department of Mathematics\\
  Winnipeg, Man. R3T 2N2\\
  Canada}
\date{date}
```

I did not edit the `\title` lines because they change from article to article. There is also a personalized `ggart2.tpl` for two authors.

1.7 *Your first article*

Your first article will be typeset using the `article` document class. To start, open the personalized article template created in section 1.6, and save it under the name of your first article. The name must be one word (no spaces) ending with `.tex`.

1.7.1 *Editing the top matter*

Edit the top matter to contain the article information (title, date, and so on). Here are some simple rules to follow:

Rule ■ Top matter for the `article` document class

1. If the title is only one line long, then there is no `\\` in the argument of the `\title` command; otherwise, separate the lines of the title with `\\`. There is no `\\` at the end of the last line.
 2. Separate the lines of the address with `\\`. There is no `\\` at the end of the last line.
 3. `\thanks` places a footnote at the bottom of the first page. If it is not needed, delete it.
 4. Multiple authors are separated by `\and`. There is only one `\author` command, and it contains all the information (name, address, support) about all the authors.
 5. The `\title` command is the only compulsory command. The others are optional.
 6. If there is no `\date` command, the current date will be shown. If you do not want a date, type the form `\date{}`; if you want a specific date, say February 21, 1995, write
`\date{February 21, 1995}`
-

1.7.2 Sectioning

An article, as a rule, is divided into sections. To start the section entitled “Introduction”, type

```
\section{Introduction} \label{S:intro}
```

Introduction is the title of the section, `S:intro` is the label. I use the convention that “`S:`” starts the label for a section. The number of the section is automatically assigned by L^AT_EX, and you can refer to this section number by `\ref{S:intro}`, as in

In section~`\ref{S:intro}`, we introduce ...

(the tilde ~ is an unbreakable space, it keeps the word “section” and the section number together—see section 2.4.3).

For instance, the section title of this section was typed as follows:

```
\section{Typing your first article} \label{S:FirstArticle}
```

A reference to this section is made by typing

```
\ref{S:FirstArticle}
```

Sections have subsections, and subsections have subsubsections, followed by paragraphs and subparagraphs. The corresponding commands are

```
\subsection \subsubsection \paragraph \subparagraph
```

1.7.3 *Invoking proclamations*

In the preamble of `article.tpl`, you typed the theorem, lemma, proposition, definition, corollary, and notation proclamations. Each of these proclamations defines an environment. For example, type a theorem in a `theorem` environment; the body of the theorem (that is, the part of the source file that produces the theorem) is between the two lines:

```
\begin{theorem} \label{T:xxx}
```

and

```
\end{theorem}
```

where `T:xxx` is the label for the theorem. Of course, `xxx` should be somewhat descriptive of the contents of the theorem. The theorem number is automatically assigned by L^AT_EX, and it can be referenced by `\ref{T:xxx}` as in

```
it follows from Theorem~\ref{T:xxx}
```

(the tilde `~` keeps the word “Theorem” and the theorem number together—see section 2.4.3). I use the convention that the label for a theorem starts with “T:”.

1.7.4 *Inserting references*

Finally, we discuss the bibliography. Below are typical entries for the most often used types of references: an article in a journal, a book, an article in a conference proceedings, an article (chapter) in a book, a Ph.D. thesis, and a technical report (see `inbibl.tpl` in the `ftp` directory).

```
\bibitem{eM57}
```

```
Ernest~T. Moynahan, \emph{On a problem of M.~H. Stone},  
Acta Math. Acad. Sci. Hungar. \textbf{8} (1957), 455--460.
```

```
\bibitem{gM68}
```

```
George~A. Menuhin, \emph{Universal Algebra}, D.~van Nostrand,  
Princeton-Toronto-London-Melbourne, 1968.
```

```
\bibitem{pK69}
```

Peter~A. Konig, \emph{Composition of functions}, Proceedings of the Conference on Universal Algebra (Kingston, 1969).

\bibitem{hA70}

Henry~H. Albert, \emph{Free torsoids}, Current Trends in Lattice Theory, D.~van Nostrand, 1970.

\bibitem{sF90}

Soo-Key Foo, \emph{Lattice constructions}, Ph.D. thesis, University of Winnebago, 1990.

\bibitem{gF86}

Grant~H. Foster, \emph{Computational complexity in lattice theory}, Tech. report, Carnegie Mellon University, 1986.

I use the convention that the label for the \bibitem consists of the initials of the author and the year of publication: a publication by Andrew B. Reich in 1987 would have the label aR87 (the second publication would be aR87a). For joint publications, the label consists of the initials of the authors and the year of publication; for instance, a publication by John Bradford and Andrew B. Reich in 1987 would have the label BR87. Of course, you can use any label you choose (subject to the rule in section 6.4.2).

Suppose you want to include as the fifth item in the bibliography the following article:

John Bradford and Andrew B. Reich, *Duplexes in posets*, Proc. Amer. Math. Soc. **112** (1987), 115–125.

Modeling it after Moynahan’s article, type it as:

\bibitem{BR87}

John~Bradford and Andrew~B. Reich, \emph{Duplexes in posets}, Proc. Amer. Math. Soc. \textbf{112} (1987), 115--125.

A reference to this article is made with \cite{BR87}, for instance:

┌
this result was first published in [5]
└

typed as

this result was first published in~\cite{BR87}

Note that you have to arrange the references in the thebibliography environment in the order you wish to see them. L^AT_EX only takes care of the numbering and the citations in the text.

Tip The `thebibliography` environment properly handles periods. You do not have to mark periods for abbreviations (in the form `.\_`—as discussed in section 2.2.2) in the name of a journal, so

`Acta Math. Acad. Sci. Hungar.`

is correct.

1.8 *L^AT_EX error messages*

You'll probably make a number of mistakes in your first article. The mistakes come in various forms:

- Typographical errors, which L^AT_EX will blindly typeset. View the typeset version, find the errors, and correct the source file.
- Errors in mathematical formulas or in the formatting of the text.
- Errors in your instructions—commands and environments—to L^AT_EX.

Let's look at some examples by introducing a number of errors in the source file of the `intrart.tex` introductory sample article and see what error messages occur.

Example 1 Go to line 21 (you do not have to count lines, since most editors have a “go to line” command) and remove the closing brace so it reads:

```
\begin{abstract
```

Upon typesetting `intrart.tex`, L^AT_EX informs you of a mistake:

```
Runaway argument?
{abstract
! Paragraph ended before \end was complete.
<to be read again>
\par
```

1.26

Line 26 of the file is the line after `\end{abstract}`. From the error message, you can tell that something is wrong with the `abstract` environment.

Example 2 Now correct line 21, go to line 25, change it from

```
\end{abstract}
```

to

```
\end{abstrac}
```

and typeset again. L^AT_EX will inform you:


```
! LaTeX Error: \begin{abstract} on input line 21
ended by \end{abstrac}.
```

```
1.25 \end{abstrac}
```

Pressing return, L^AT_EX will recover from this error.

Example 3 Instead of correcting the error in line 25, comment it out:

```
% \end{abstrac}
```

and introduce an additional error in line 67. This line presently reads:

```
lattices satisfying condition~\textup{(J)}. Let $\Theta$
```

Change Θ to Teta :

```
lattices satisfying condition~\textup{(J)}. Let $\Teta$
```

Typesetting the article now, the message is:

```
! Undefined control sequence.
1.67 ...xtup{(J)}. Let $\Teta
$
```

and pressing return gives the message:

```
! LaTeX Error: \begin{abstract} on input line 21 ended
by \end{document}.
```

```
1.131 \end{document}
```

These two mistakes are easy to identify. Teta is a typo for Θ . Observe how L^AT_EX tries to match

```
\begin{abstract}
```

```
with
```

```
\end{document}
```

Undo the two changes (lines 25 and 67).

Example 4 In line 73, change

```
\langle \dots, 0, \dots, \overset{i}{d},
```

to

```
\langle \dots, 0, \dots, \overset{i}{d},
```

This results in the message:

```
Runaway argument?
\def \{\@amsmath@err {\Invalid@@ \}\@eha } \label {E\ETC.
! Paragraph ended before \equation was complete.
<to be read again>
\par
```

1.79

Line 79 is the blank line following `\end{theorem}`. L^AT_EX skipped over the defective construct `\overset` and the incomplete equation environment, indicating the error past the end of the `theorem` environment. The error message indicates that the error may have been caused by the new paragraph (`\par`). Of course, there can be no new paragraph in either the second argument of `\overset` or the displayed formula. The solution does not come easily except by isolating the last paragraph and investigating it.

Error messages from L^AT_EX are not always as helpful as one would like, but there is always some information to be gleaned from them. As a rule, the error message should at least inform you of the line number (or paragraph or formula) where the error was caught. Try to identify the structure that caused the error: a command, an environment, or so forth. Keep in mind that it could be quite far from the line where L^AT_EX indicated the error. Try reading the section of this book that describes that command or environment; it should help in correcting the error.

The next best defense is to isolate your problem. Create a `current.tex` file that is the same as the present article, except that there is only one paragraph in the `document` environment. When this paragraph is typeset correctly, cut and paste it into your source file. If there is only one paragraph in the document, the error is easier to find. If the error is of the type as in the last example, split the paragraph into smaller paragraphs. See also section 2.5 on how to use the `comment` environment for finding errors.

1.9 Logical and visual design

This book attempts to show how to typeset an article, not how to write it. Nevertheless, it seems appropriate to point out some approaches to article design.

The typeset version of our `intrart.tex` introductory sample article (pp. 39–40) looks impressive. (For another example of a typeset article, see `sampart.tex` on pp. 361–363.) To produce an article like this, you have to realize that there are two aspects of article design: the *visual* and the *logical*. Let’s borrow an example from the sample article to illustrate this: a theorem. You tell L^AT_EX to typeset a theorem and number it. Here is how you type the theorem:

```
\begin{theorem} \label{T:P*}
```

```

Let  $D_i$ ,  $i \in I$ , be complete distributive
lattices satisfying condition~\textup{(2)}. Let  $\Theta$ 
be a complete congruence relation on
 $\Pi^* (D_i \mid i \in I)$ .
If there exists an  $i \in I$  and a  $d \in D_i$  with
 $d < 1_i$  such that for all  $d \leq c < 1_i$ ,
\begin{equation} \label{E:cong1}
\angle \dots, 0, \dots, \overset{i}{d},
\dots, 0, \dots \angle \equiv \angle \dots, 0, \dots,
\overset{i}{c}, \dots, 0, \dots \angle \pmod{\Theta},
\end{equation}
then  $\Theta = \iota$ .
\end{theorem}

```

You find the typeset form on page 40.

The logical design is the theorem itself, which is placed in the `theorem` environment. For the visual design, L^AT_EX makes literally hundreds of decisions: the vertical space before and after the theorem; the bold **Theorem** heading and its numbering; the vertical space before and after the equation, and its numbering; the spacing of all the math symbols (inline and displayed formulas are spaced differently); the text of the theorem to be emphasized; and so on.

The decisions were made by professional designers, whose expertise is hidden in T_EX itself, in L^AT_EX, in the document class, and in the packages. Could you have typeset this theorem yourself? Probably not. Aesthetic decisions are difficult for lay people to make. But even if you could have guessed the correct spacing, you would have faced the problem of consistency (guaranteeing that the next theorem will look the same), and just as importantly, you would have spent a great deal of time and energy on the *visual design* of the theorem, as opposed to the *logical design*. The idea is to concentrate on the logical design and let L^AT_EX take care of the visual design.

This approach has the advantage that by changing the document class (or its options; see sections 7.1.2 and 8.4), the visual design can be changed. If you code the visual design into the article (“hard coding” it, as a programmer would say), it’s very difficult to change.

L^AT_EX uses four major tools to separate the logical and visual designs of an article:

Commands Information is given to L^AT_EX as arguments of commands; it’s up to L^AT_EX to process the information. For instance, the title page information (especially in the `amsart` document class) is given in this form; the organization of the title page is completely up to the document class and its options.

A more subtle example is the use of a command for distinguishing a term or

notation. For instance, you may want to use an `\env` command for environment names. You may define `\env` as follows (`\newcommand` is explained in section 9.1.1):

```
\newcommand{\env}[1]{\texttt{#1}}
```

which typesets all environment names in typewriter style (see section 2.6.2). Logically, you have decided that an environment name should be marked up. Visually, you may change the decision any time. By changing the definition to

```
\newcommand{\env}[1]{\textbf{#1}}
```

all environment names will be typeset in bold (see section 2.6.7).

The following more mathematical example is taken from `sampart2.tex` (see Appendix D and the `ftp` directory). This article defines the construct $D^{(2)}$ with the command

```
\newcommand{\Ds}{D^{\angle 2 \angle}}
```

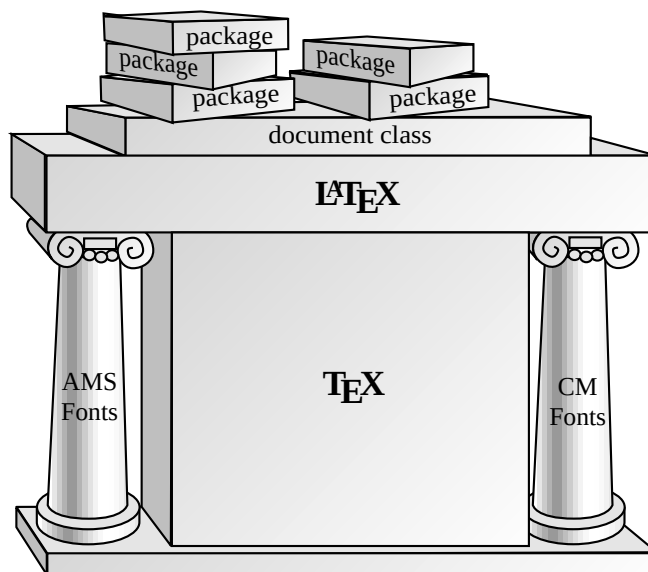
If a referee (or coauthor) suggests a different notation, changing this *one line* will carry out the change throughout the whole article.

Environments Important logical structures are placed in environments. For instance, you can give a list as an environment by saying that this is a list and these are the items (see section 3.1). Again, exactly how the list is typeset is up to L^AT_EX; you can even switch from one list type to another by just changing the name of the environment.

Proclamations These define numbered environments. If the `amsthm` package is used, you can further specify which one of three styles to use for typesetting; at any time you can change the style or the numbering scheme in the preamble (see the typeset `sampart.tex` on pages 361–363 for examples of proclamations printed in the three styles).

Cross-referencing Since theorems and sections are logical units, they can be freely moved around. This gives tremendous freedom in reorganizing the source file to improve the logical design.

You write articles to communicate. The closer you get to a separation of logical and visual design, the more you are able to concentrate on communicating your ideas. Of course, you can never quite reach this ideal. For instance, a “line too wide” warning (see sections 1.1.3 and 2.7.1) is a problem of visual design. When the journal changes the document class, unless the new document class retains the same fonts and line width, new “line too wide” problems arise. However, L^AT_EX is successful well over 95% of the time in solving visual design problems without your intervention. This is getting fairly close to the ideal.

Figure 1.2: The structure of $\text{L}^{\text{A}}\text{T}_{\text{E}}\text{X}$

1.10 A brief overview

Having finished the short course, maybe it's time to pause and get a brief overview of how $\text{L}^{\text{A}}\text{T}_{\text{E}}\text{X}$ works. As I pointed out in the Introduction, at the core of $\text{L}^{\text{A}}\text{T}_{\text{E}}\text{X}$ is a *programming language* called $\text{T}_{\text{E}}\text{X}$, providing many typesetting instructions. Along with $\text{T}_{\text{E}}\text{X}$ comes a set of fonts called *Computer Modern* (CM). The CM fonts and the $\text{T}_{\text{E}}\text{X}$ programming language form the foundation of a typical $\text{T}_{\text{E}}\text{X}$ system.

$\text{T}_{\text{E}}\text{X}$ is expandable, that is, additional commands can be defined in terms of more basic ones. One of the best known expansions of $\text{T}_{\text{E}}\text{X}$ is $\text{L}^{\text{A}}\text{T}_{\text{E}}\text{X}$; it introduces the idea of a *logical unit* that you read about in section 1.9.

Visual layout in $\text{L}^{\text{A}}\text{T}_{\text{E}}\text{X}$ is determined by the *document class*; for example, you now have some familiarity with the `article` document class. Expansions of $\text{L}^{\text{A}}\text{T}_{\text{E}}\text{X}$ are called *packages*; you have already come across the `amssymb` and `amsmath` packages.

The structure of $\text{L}^{\text{A}}\text{T}_{\text{E}}\text{X}$ is illustrated in Figure 1.2. This figure suggests that, in order to work with a $\text{L}^{\text{A}}\text{T}_{\text{E}}\text{X}$ document, you first have to install $\text{T}_{\text{E}}\text{X}$ and the CM fonts, then $\text{L}^{\text{A}}\text{T}_{\text{E}}\text{X}$, and finally specify the document class and the necessary packages. The AMSFonts font set is useful but it's not absolutely necessary.

Figure 1.2 illustrates my view of $\text{T}_\text{E}\text{X}$ and $\text{L}^\text{A}\text{T}_\text{E}\text{X}$: it is the foundation on which many useful packages—extensions of $\text{L}^\text{A}\text{T}_\text{E}\text{X}$ —are built. It is essential that you understand the packages that make your work easier. An important example of this is the central focus of this book: typesetting math in $\text{L}^\text{A}\text{T}_\text{E}\text{X}$. When typesetting math, invoke the `amsmath` package. In Part I, you invoke the `amsmath` package directly; in later parts of this book, I point out when a described feature needs the `amsmath` (or some other) package. The $\mathcal{A}\mathcal{M}\mathcal{S}$ document classes automatically load the `amsmath` and `amsmath` packages.

1.11 Using $\text{L}^\text{A}\text{T}_\text{E}\text{X}$

Figure 1.3 illustrates the steps taken to produce a typeset document. As illustrated in Figure 1.3, you open the source file or create a new one using an editor; call the source file `myart.tex`. Once the document is ready, typeset it with $\text{T}_\text{E}\text{X}$ using the $\text{L}^\text{A}\text{T}_\text{E}\text{X}$ format. This step produces three files:

- `myart.dvi`, the typeset article in machine readable format;
- `myart.aux`, the auxiliary file; it is used by $\text{L}^\text{A}\text{T}_\text{E}\text{X}$ for internal “book keeping”, including cross-referencing;
- `myart.log`, the log file; $\text{L}^\text{A}\text{T}_\text{E}\text{X}$ records the typesetting session in the log file, including the warnings and the errors.

Use a video driver to display the typeset article, `myart.dvi`, on the monitor, and a printer driver to print the typeset article, `myart.dvi` on a printer.

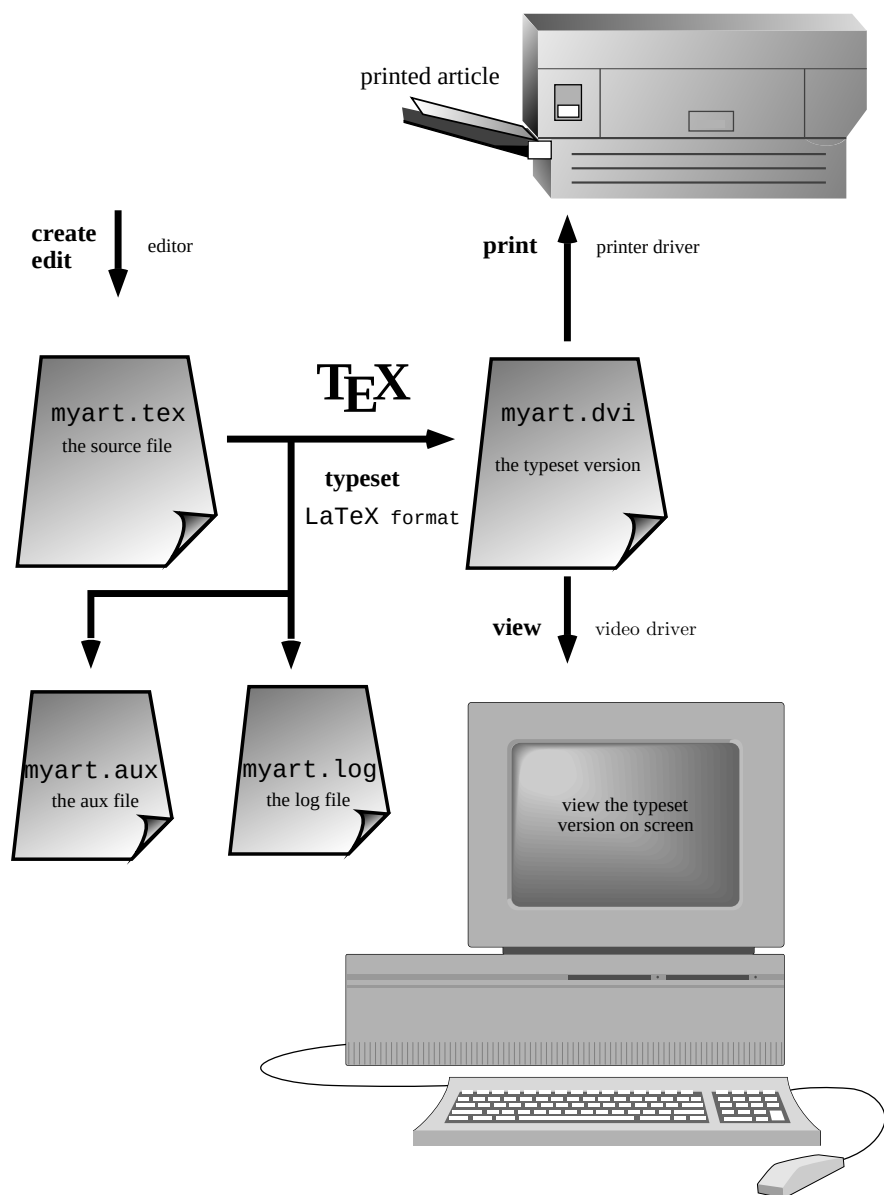
It should be emphasized that of the four programs used, only one ($\text{T}_\text{E}\text{X}$) is the same for all computers and all implementations. If you use $\text{T}_\text{E}\text{X}$ in an “integrated environment”, then all four programs appear as one.

1.11.1 $\mathcal{A}\mathcal{M}\mathcal{S}$ - $\text{L}^\text{A}\text{T}_\text{E}\text{X}$ revisited

Now that you understand the structure of $\text{L}^\text{A}\text{T}_\text{E}\text{X}$, we can again discuss $\mathcal{A}\mathcal{M}\mathcal{S}$ - $\text{L}^\text{A}\text{T}_\text{E}\text{X}$, a set of enhancements to $\text{L}^\text{A}\text{T}_\text{E}\text{X}$ by the $\mathcal{A}\mathcal{M}\mathcal{S}$. As outlined in the Introduction, the $\mathcal{A}\mathcal{M}\mathcal{S}$ enhancements to $\text{L}^\text{A}\text{T}_\text{E}\text{X}$ fall into three groups: the $\mathcal{A}\mathcal{M}\mathcal{S}$ math enhancements, the document classes, and the `AMSF` fonts. Each consists of several packages.

An $\mathcal{A}\mathcal{M}\mathcal{S}$ document class automatically invokes the following $\mathcal{A}\mathcal{M}\mathcal{S}$ packages (see section 8.5 for a more detailed discussion and for the package interdependency diagram, Figure 8.3):

- `amsmath`, the main $\mathcal{A}\mathcal{M}\mathcal{S}$ math package;
- `amsthm`, proclamations with style and the proof environment;
- `amsopn`, operator names;
- `amstext`, the `\text` command;
- `amsfonts`, commands for math alphabets;
- `amssbsy`, bold symbol commands.

Figure 1.3: Using $\text{L}^{\text{A}}\text{T}_{\text{E}}\text{X}$

They do not automatically input the `amssymb` package, which provides the math symbol names. You can additionally input this and other $\mathcal{A}\mathcal{M}\mathcal{S}$ -L^AT_EX or L^AT_EX packages as needed.

When we discuss a feature of L^AT_EX that requires a package, I point this out in the text. I do not always point out, however, the interdependencies of the document classes and of the packages. For instance, the `\text` command (section 2.9) is provided by the `amstext` package, which is loaded automatically by the `amsmath` package, which in turn is loaded automatically by each of the $\mathcal{A}\mathcal{M}\mathcal{S}$ -L^AT_EX document classes. These interdependencies are discussed in section 8.5.

1.11.2 Interactive L^AT_EX

As a rule, L^AT_EX typesets an article non-interactively. Occasionally, you may want to use L^AT_EX interactively, that is, give L^AT_EX an instruction and ask it to carry it out. If L^AT_EX can't carry out your instructions, it displays a prompt:

- The `**` prompt means that L^AT_EX wants to know the name of a source file to typeset. Probably, you misspelled a name, or you are in the wrong directory.
- The `?` prompt asks “What should I do about the error I found?” Press return to continue; most of the time L^AT_EX recovers from the error, and completes the typesetting. If L^AT_EX can't recover from the error at the `?` prompt, press `X` to exit. Typing `H` instead may yield useful advice.
- The `*` signifies interactive mode: L^AT_EX is waiting for an instruction. To get to such a prompt, comment out the line

```
\end{document}
```

(by inserting `%` as the first character of the line) in the source file and typeset. Interactive instructions (such as `\show`—see section 9.1.6) may be given at the `*` prompt. Typing

```
\end{document}
```

at the `*` prompt exits L^AT_EX.

1.11.3 Files

A number of files are created when a document called, say, `myart.tex` is typeset. When the typesetting takes place, a number of messages appear on the monitor. These are stored in the *log file*, `myart.log`. The typeset document is written in the `myart.dvi` file. L^AT_EX also writes one or more auxiliary files, as necessary. The most important one is `myart.aux`, the *aux file* (see section E.2.4).

1.11.4 Versions

All components of L^AT_EX interact. Since all of them have many versions, make sure they are up-to-date and compatible. While writing this book, I used L^AT_EX 2_ε (L^AT_EX version 2e), issued on December 1, 1994. You can check the version numbers and dates by reading the first few lines of the files in an editor or by checking the dates shown on the file list discussed below.

L^AT_EX is updated every six months; in-between updates, the `ltpatch.ltx` document is posted periodically on the CTAN (see Appendix G). Get this file and place it in your T_EX input directory. When you rebuild your formats, `ltpatch.ltx` will patch L^AT_EX.

When you typeset a L^AT_EX document, L^AT_EX introduces itself in the log file with a line such as

```
LaTeX2e <1994/12/01> patch level 3
```

giving you the release date and patch level. If you use a new feature of L^AT_EX that was introduced recently, place in the preamble of your document the command

```
\NeedsTeXFormat{LaTeX2e}[1994/12/01]
```

where the date is the release date of the version you must use.

As of this writing, $\mathcal{A}\mathcal{M}\mathcal{S}$ -L^AT_EX is at version 1.2 and the AMSFonts font set is at version 2.2. See Appendix G on how to get updated versions of $\mathcal{A}\mathcal{M}\mathcal{S}$ -L^AT_EX and the AMSFonts.

BIB_TE_X is at version 0.99 (version 1.0 is expected soon). In this book, I use the `amspain.bst` bibliographic style file (version 1.2a).

If you include the `\listfiles` command in the preamble of your document, the log file will contain a detailed listing of all the files used in the typesetting of your document.

Here are a few lines from such a listing:

```
*File List*
book.cls      1994/12/09 v1.2x Standard LaTeX document class
leqno.clo     1994/12/09 v1.2x Standard LaTeX option
bk10.clo      1994/12/09 v1.2x Standard LaTeX file (size option)
amsmath.sty   1995/02/23 v1.2b AMS math features
Ueues57.fd    1994/10/17 v2.2d AMS font definitions
latexsym.sty  1994/09/25 v2.1f Standard LaTeX package
xspace.sty    1994/11/15 v1.03 Space after command names (DPC)
Ulasym.fd     1994/09/25 v2.1f LaTeX symbol font definitions
*****
```

1.12 What's next?

Having read thus far, you probably know enough about L^AT_EX to write your first article. The best way to learn L^AT_EX is by experimentation. Later, you may want to read Parts II–V.

If you look at the source files of the sample articles, your first impression may be how very verbose L^AT_EX is. In actual practice, L^AT_EX is fairly easy to type. There are two basic tools to make typing L^AT_EX more efficient.

Firstly, you should have a good editor. For instance, you should be able to train your editor so that a single keystroke produces the text:

```
\begin{theorem} \label{T:}

\end{theorem}
```

with the cursor in the position following “:” (where you type the label).

Secondly, customizing L^AT_EX will make repetitious structures such as

```
\begin{equation}
\langle \dots, 0, \dots, \overset{i}{d}, \dots, 0,
\dots \rangle \equiv \langle \dots, 0, \dots, \overset{i}{c}, \dots, 0, \dots
\rangle \pmod{\Theta},
\end{equation}
```

which prints

$$(3.1) \quad \langle \dots, 0, \dots, \overset{i}{d}, \dots, 0, \dots \rangle \equiv \langle \dots, 0, \dots, \overset{i}{c}, \dots, 0, \dots \rangle \pmod{\Theta},$$

(see page 369) become much shorter and (with practice) more readable. Utilizing the user-defined commands `\con` (for congruence), `\vct` (for vector), and `\gQ` (for Greek theta), in `sampart2.tex` (in the `ftp` directory and in Appendix C), this formula becomes

```
\begin{equation}
\con \vct{i}{d} = \vct{i}{c} (\gQ),
\end{equation}
```

which is about as long as the typeset formula itself.

The topic of user-defined commands is taken up in Part IV.

Finally, custom formats (section 9.7) substantially speed up the typesetting of an average document.

A

*Math symbol tables**A.1 Hebrew letters*

Type:	Print:	Type:	Print:
<code>\aleph</code>	ℵ	<code>\beth</code>	⋈
<code>\daleth</code>	ℳ	<code>\gimel</code>	ℹ

All symbols but `\aleph` need the `amssymb` package.

A.2 Greek characters

Type:	Print:	Type:	Print:	Type:	Print:
<code>\alpha</code>	α	<code>\beta</code>	β	<code>\gamma</code>	γ
<code>\digamma</code>	$\mathbb{F}$	<code>\delta</code>	δ	<code>\epsilon</code>	ϵ
<code>\varepsilon</code>	ε	<code>\zeta</code>	ζ	<code>\eta</code>	η
<code>\theta</code>	θ	<code>\vartheta</code>	ϑ	<code>\iota</code>	ι
<code>\kappa</code>	κ	<code>\varkappa</code>	$\varkappa$	<code>\lambda</code>	λ
<code>\mu</code>	μ	<code>\nu</code>	ν	<code>\xi</code>	ξ
<code>\pi</code>	π	<code>\varpi</code>	ϖ	<code>\rho</code>	ρ
<code>\varrho</code>	ϱ	<code>\sigma</code>	σ	<code>\varsigma</code>	ς
<code>\tau</code>	τ	<code>\upsilon</code>	υ	<code>\phi</code>	ϕ
<code>\varphi</code>	φ	<code>\chi</code>	χ	<code>\psi</code>	ψ
<code>\omega</code>	ω				

`\digamma` and `\varkappa` require the `amssymb` package.

Type:	Print:	Type:	Print:
<code>\Gamma</code>	Γ	<code>\varGamma</code>	$\varGamma$
<code>\Delta</code>	Δ	<code>\varDelta</code>	$\varDelta$
<code>\Theta</code>	Θ	<code>\varTheta</code>	$\varTheta$
<code>\Lambda</code>	Λ	<code>\varLambda</code>	$\varLambda$
<code>\Xi</code>	Ξ	<code>\varXi</code>	$\varXi$
<code>\Pi</code>	Π	<code>\varPi</code>	$\varPi$
<code>\Sigma</code>	Σ	<code>\varSigma</code>	$\varSigma$
<code>\Upsilon</code>	Υ	<code>\varUpsilon</code>	$\varUpsilon$
<code>\Phi</code>	Φ	<code>\varPhi</code>	$\varPhi$
<code>\Psi</code>	Ψ	<code>\varPsi</code>	$\varPsi$
<code>\Omega</code>	Ω	<code>\varOmega</code>	$\varOmega$

All symbols whose name begins with `var` need the `amsmath` package.

A.3 $\text{\textit{L}A\text{\textit{T}}_E\text{\textit{X}}$ binary relations

Type:	Print:	Type:	Print:
<code>\in</code>	$\in$	<code>\ni</code>	$\ni$
<code>\leq</code>	$\leq$	<code>\geq</code>	$\geq$
<code>\ll</code>	$\ll$	<code>\gg</code>	$\gg$
<code>\prec</code>	$\prec$	<code>\succ</code>	$\succ$
<code>\preceq</code>	$\preceq$	<code>\succeq</code>	$\succeq$
<code>\sim</code>	$\sim$	<code>\cong</code>	$\cong$
<code>\simeq</code>	$\simeq$	<code>\approx</code>	$\approx$
<code>\equiv</code>	$\equiv$	<code>\doteq</code>	$\doteq$
<code>\subset</code>	$\subset$	<code>\supset</code>	$\supset$
<code>\subseteq</code>	$\subseteq$	<code>\supseteq</code>	$\supseteq$
<code>\sqsubseteq</code>	$\sqsubseteq$	<code>\sqsupseteq</code>	$\sqsupseteq$
<code>\smile</code>	$\smile$	<code>\frown</code>	$\frown$
<code>\perp</code>	$\perp$	<code>\models</code>	$\models$
<code>\mid</code>	$\mid$	<code>\parallel</code>	$\parallel$
<code>\vdash</code>	$\vdash$	<code>\dashv</code>	$\dashv$
<code>\propto</code>	$\propto$	<code>\asymp</code>	$\asymp$
<code>\bowtie</code>	$\bowtie$		
<code>\sqsubset</code>	$\sqsubset$	<code>\sqsupset</code>	$\sqsupset$
<code>\Join</code>	$\Join$		

The latter three symbols need the `latexsym` package.

A.4 $\mathcal{AMS}$ binary relations

Type:	Print:	Type:	Print:
<code>\leqslant</code>	$\leqslant$	<code>\geqslant</code>	$\geqslant$
<code>\eqslantless</code>	$\eqslantless$	<code>\eqslantgtr</code>	$\eqslantgtr$
<code>\lesssim</code>	$\lesssim$	<code>\gtrsim</code>	$\gtrsim$
<code>\lessapprox</code>	$\lessapprox$	<code>\gtrapprox</code>	$\gtrapprox$
<code>\approxeq</code>	$\approxeq$		
<code>\lessdot</code>	$\lessdot$	<code>\gtrdot</code>	$\gtrdot$
<code>\lll</code>	$\lll$	<code>\ggg</code>	$\ggg$
<code>\lessgtr</code>	$\lessgtr$	<code>\gtrless</code>	$\gtrless$
<code>\lesseqgtr</code>	$\lesseqgtr$	<code>\gtreqless</code>	$\gtreqless$
<code>\lesseqqgtr</code>	$\lesseqqgtr$	<code>\gtreqqless</code>	$\gtreqqless$
<code>\doteqdot</code>	$\doteqdot$	<code>\eqcirc</code>	$\eqcirc$
<code>\circeq</code>	$\circeq$	<code>\fallingdotseq</code>	$\fallingdotseq$
<code>\risingdotseq</code>	$\risingdotseq$	<code>\triangleq</code>	$\triangleq$
<code>\backsim</code>	$\backsim$	<code>\thicksim</code>	$\thicksim$
<code>\backsimeq</code>	$\backsimeq$	<code>\thickapprox</code>	$\thickapprox$
<code>\preccurlyeq</code>	$\preccurlyeq$	<code>\succcurlyeq</code>	$\succcurlyeq$
<code>\curlyeqprec</code>	$\curlyeqprec$	<code>\curlyeqsucc</code>	$\curlyeqsucc$
<code>\precsim</code>	$\precsim$	<code>\succsim</code>	$\succsim$
<code>\precapprox</code>	$\precapprox$	<code>\succapprox</code>	$\succapprox$
<code>\subseteq</code>	$\subseteq$	<code>\supseteq</code>	$\supseteq$
<code>\Subset</code>	$\Subset$	<code>\Supset</code>	$\Supset$
<code>\vartriangleleft</code>	$\vartriangleleft$	<code>\vartriangleright</code>	$\vartriangleright$
<code>\trianglelefteq</code>	$\trianglelefteq$	<code>\trianglerighteq</code>	$\trianglerighteq$
<code>\vDash</code>	$\vDash$	<code>\Vdash</code>	$\Vdash$
<code>\Vvdash</code>	$\Vvdash$		
<code>\smallsmile</code>	$\smallsmile$	<code>\smallfrown</code>	$\smallfrown$
<code>\shortmid</code>	$\shortmid$	<code>\shortparallel</code>	$\shortparallel$
<code>\bumpeq</code>	$\bumpeq$	<code>\Bumpeq</code>	$\Bumpeq$
<code>\between</code>	$\between$	<code>\pitchfork</code>	$\pitchfork$
<code>\varpropto</code>	$\varpropto$	<code>\backepsilon</code>	$\backepsilon$
<code>\blacktriangleleft</code>	$\blacktriangleleft$	<code>\blacktriangleright</code>	$\blacktriangleright$
<code>\therefore</code>	$\therefore$	<code>\because</code>	$\because$

All symbols require the `amssymb` package.

A.5 $\mathcal{AMS}$ negated binary relations

Type:	Print:	Type:	Print:
<code>\ne</code>	$\neq$	<code>\notin</code>	$\notin$
<code>\nless</code>	$\nless$	<code>\ngtr</code>	$\ngtr$
<code>\nleq</code>	$\nleq$	<code>\ngeq</code>	$\ngeq$
<code>\nleqslant</code>	$\nleqslant$	<code>\ngeqslant</code>	$\ngeqslant$
<code>\nleqq</code>	$\nleqq$	<code>\ngeqq</code>	$\ngeqq$
<code>\lneq</code>	$\lneq$	<code>\gneq</code>	$\gneq$
<code>\lneqq</code>	$\lneqq$	<code>\gneqq</code>	$\gneqq$
<code>\lvertneqq</code>	$\lvertneqq$	<code>\gvertneqq</code>	$\gvertneqq$
<code>\lnsim</code>	$\lnsim$	<code>\gnsim</code>	$\gnsim$
<code>\lnapprox</code>	$\lnapprox$	<code>\gnapprox</code>	$\gnapprox$
<code>\nprec</code>	$\nprec$	<code>\nsucc</code>	$\nsucc$
<code>\npreceq</code>	$\npreceq$	<code>\nsucceq</code>	$\nsucceq$
<code>\precneqq</code>	$\precneqq$	<code>\succneqq</code>	$\succneqq$
<code>\precnsim</code>	$\precnsim$	<code>\succnsim</code>	$\succnsim$
<code>\precnapprox</code>	$\precnapprox$	<code>\succnapprox</code>	$\succnapprox$
<code>\nsim</code>	$\nsim$	<code>\ncong</code>	$\ncong$
<code>\nshortmid</code>	$\nshortmid$	<code>\nshortparallel</code>	$\nshortparallel$
<code>\nmid</code>	$\nmid$	<code>\nparallel</code>	$\nparallel$
<code>\nvdash</code>	$\nvdash$	<code>\nvDash</code>	$\nvDash$
<code>\nVdash</code>	$\nVdash$	<code>\nVDash</code>	$\nVDash$
<code>\ntriangleleft</code>	$\ntriangleleft$	<code>\ntriangleright</code>	$\ntriangleright$
<code>\ntrianglelefteq</code>	$\ntrianglelefteq$	<code>\ntrianglerighteq</code>	$\ntrianglerighteq$
<code>\nsubseteq</code>	$\nsubseteq$	<code>\nsupseteq</code>	$\nsupseteq$
<code>\nsubseteqq</code>	$\nsubseteqq$	<code>\nsupseteqq</code>	$\nsupseteqq$
<code>\subsetneq</code>	$\subsetneq$	<code>\supsetneq</code>	$\supsetneq$
<code>\varsubsetneq</code>	$\varsubsetneq$	<code>\varsupsetneq</code>	$\varsupsetneq$
<code>\subsetneqq</code>	$\subsetneqq$	<code>\supsetneqq</code>	$\supsetneqq$
<code>\varsubsetneqq</code>	$\varsubsetneqq$	<code>\varsupsetneqq</code>	$\varsupsetneqq$

All symbols but `\ne` require the `amssymb` package.

A.6 Binary operations

Type:	Print:	Type:	Print:
<code>\pm</code>	$\pm$	<code>\mp</code>	$\mp$
<code>\times</code>	$\times$	<code>\cdot</code>	$\cdot$
<code>\circ</code>	$\circ$	<code>\bigcirc</code>	$\bigcirc$
<code>\div</code>	$\div$	<code>\diamond</code>	$\diamond$
<code>\ast</code>	$*$	<code>\star</code>	$\star$
<code>\cap</code>	$\cap$	<code>\cup</code>	$\cup$
<code>\sqcap</code>	$\sqcap$	<code>\sqcup</code>	$\sqcup$
<code>\wedge</code>	$\wedge$	<code>\vee</code>	$\vee$
<code>\triangleleft</code>	$\triangleleft$	<code>\triangleright</code>	$\triangleright$
<code>\bigtriangleup</code>	$\bigtriangleup$	<code>\bigtriangledown</code>	$\bigtriangledown$
<code>\oplus</code>	$\oplus$	<code>\ominus</code>	$\ominus$
<code>\otimes</code>	$\otimes$	<code>\oslash</code>	$\oslash$
<code>\odot</code>	$\odot$	<code>\bullet</code>	$\bullet$
<code>\dagger</code>	$\dagger$	<code>\ddagger</code>	$\ddagger$
<code>\setminus</code>	$\setminus$	<code>\uplus</code>	$\uplus$
<code>\wr</code>	$\wr$	<code>\amalg</code>	$\amalg$
<code>\lhd</code>	$\lhd$	<code>\rhd</code>	$\rhd$
<code>\unlhd</code>	$\unlhd$	<code>\unrhd</code>	$\unrhd$
<code>\dotplus</code>	$\dotplus$	<code>\centerdot</code>	$\cdot$
<code>\ltimes</code>	$\ltimes$	<code>\rtimes</code>	$\rtimes$
<code>\leftthreetimes</code>	$\leftthreetimes$	<code>\rightthreetimes</code>	$\rightthreetimes$
<code>\circleddash</code>	$\circleddash$	<code>\smallsetminus</code>	$\setminus$
<code>\barwedge</code>	$\barwedge$	<code>\doublebarwedge</code>	$\bar{\bar{\wedge}}$
<code>\curlywedge</code>	$\curlywedge$	<code>\curlyvee</code>	$\curlyvee$
<code>\veebar</code>	$\veebar$	<code>\intercal</code>	$\intercal$
<code>\Cap</code>	$\Cap$	<code>\Cup</code>	$\Cup$
<code>\circledast</code>	$\circledast$	<code>\circledcirc</code>	$\circledcirc$
<code>\boxminus</code>	$\boxminus$	<code>\boxtimes</code>	$\boxtimes$
<code>\boxdot</code>	$\boxdot$	<code>\boxplus</code>	$\boxplus$
<code>\divideontimes</code>	$\divideontimes$		
<code>\And</code>	$\&$		

This table is divided into four parts. The first part contains the binary operations in $\text{\LaTeX}$. The second part requires the `latexsym` package. The third part contains the $\mathcal{A}\mathcal{M}\mathcal{S}$ additions; they require the `amssymb` package. The symbol `\And` requires the `amsmath` package.

A.7 Arrows

Type:	Print:	Type:	Print:
<code>\leftarrow</code>	$\leftarrow$	<code>\rightarrow</code> or <code>\to</code>	$\rightarrow$
<code>\longleftarrow</code>	$\longleftarrow$	<code>\longrightarrow</code>	$\longrightarrow$
<code>\Leftarrow</code>	$\Leftarrow$	<code>\Rightarrow</code>	$\Rightarrow$
<code>\Longleftarrow</code>	$\Longleftarrow$	<code>\Longrightarrow</code>	$\Longrightarrow$
<code>\leftrightarrow</code>	$\leftrightarrow$	<code>\longleftrightarrow</code>	$\longleftrightarrow$
<code>\Leftrightarrow</code>	$\Leftrightarrow$	<code>\Longleftrightarrow</code>	$\Longleftrightarrow$
<code>\uparrow</code>	$\uparrow$	<code>\downarrow</code>	$\downarrow$
<code>\Uparrow</code>	$\Uparrow$	<code>\Downarrow</code>	$\Downarrow$
<code>\updownarrow</code>	$\updownarrow$	<code>\Updownarrow</code>	$\Updownarrow$
<code>\nearrow</code>	$\nearrow$	<code>\searrow</code>	$\searrow$
<code>\swarrow</code>	$\swarrow$	<code>\nwarrow</code>	$\nwarrow$
<code>\mapsto</code>	$\mapsto$	<code>\longmapsto</code>	$\longmapsto$
<code>\hookrightarrow</code>	$\hookrightarrow$	<code>\hookrightarrow</code>	$\hookrightarrow$
<code>\leftharpoonup</code>	$\leftharpoonup$	<code>\rightharpoonup</code>	$\rightharpoonup$
<code>\leftharpoondown</code>	$\leftharpoondown$	<code>\rightharpoondown</code>	$\rightharpoondown$
<code>\rightleftharpoons</code>	$\rightleftharpoons$		
<code>\leadsto</code>	$\leadsto$		
<code>\leftrightsquigarrow</code>	$\leftrightsquigarrow$	<code>\rightsquigarrow</code>	$\rightsquigarrow$
<code>\multimap</code>	$\multimap$		
<code>\leftleftarrows</code>	$\leftleftarrows$	<code>\rightrightarrows</code>	$\rightrightarrows$
<code>\leftrightarrows</code>	$\leftrightarrows$	<code>\rightleftarrows</code>	$\rightleftarrows$
<code>\Lleftarrow</code>	$\Lleftarrow$	<code>\Rrightarrow</code>	$\Rrightarrow$
<code>\twoheadleftarrow</code>	$\twoheadleftarrow$	<code>\twoheadrightarrow</code>	$\twoheadrightarrow$
<code>\leftarrowtail</code>	$\leftarrowtail$	<code>\rightarrowtail</code>	$\rightarrowtail$
<code>\looparrowleft</code>	$\looparrowleft$	<code>\looparrowright</code>	$\looparrowright$
<code>\upuparrows</code>	$\upuparrows$	<code>\downdownarrows</code>	$\downdownarrows$
<code>\upharpoonleft</code>	$\upharpoonleft$	<code>\upharpoonright</code>	$\upharpoonright$
<code>\downharpoonleft</code>	$\downharpoonleft$	<code>\downharpoonright</code>	$\downharpoonright$
<code>\leftrightsquigarrow</code>	$\leftrightsquigarrow$	<code>\rightsquigarrow</code>	$\rightsquigarrow$
<code>\multimap</code>	$\multimap$		
<code>\nleftarrow</code>	$\nleftarrow$	<code>\nrightarrow</code>	$\nrightarrow$
<code>\nLeftarrow</code>	$\nLeftarrow$	<code>\nRightarrow</code>	$\nRightarrow$
<code>\nleftrightarrow</code>	$\nleftrightarrow$	<code>\nLeftrightarrow</code>	$\nLeftrightarrow$

This table is divided into three parts. The top part contains the symbols provided by L^AT_EX; the last command, `\leadsto`, requires the `latexsym` package. The middle table contains the $\mathcal{A}\mathcal{M}\mathcal{S}$ arrows; they all require the `amssymb` package. The bottom table lists the negated arrow symbols; they also require `amssymb`.

A.8 Miscellaneous symbols

Type:	Print:	Type:	Print:
<code>\hbar</code>	$\hbar$	<code>\ell</code>	ℓ
<code>\imath</code>	$\imath$	<code>\jmath</code>	$\jmath$
<code>\wp</code>	$\wp$	<code>\Re</code>	$\Re$
<code>\Im</code>	$\Im$	<code>\partial</code>	∂
<code>\infty</code>	∞	<code>\prime</code>	$\prime$
<code>\emptyset</code>	$\emptyset$	<code>\backslash</code>	$\backslash$
<code>\forall</code>	$\forall$	<code>\exists</code>	$\exists$
<code>\int</code>	$\int$	<code>\triangle</code>	$\triangle$
<code>\sqrt</code>	$\sqrt$	<code>\Vert</code>	$\parallel$
<code>\top</code>	$\top$	<code>\bot</code>	$\perp$
<code>\P</code>	$\P$	<code>\S</code>	$\S$
<code>\dag</code>	$\dagger$	<code>\ddag</code>	$\ddagger$
<code>\flat</code>	$\flat$	<code>\natural</code>	$\natural$
<code>\sharp</code>	$\sharp$	<code>\angle</code>	$\angle$
<code>\clubsuit</code>	$\clubsuit$	<code>\diamondsuit</code>	$\diamondsuit$
<code>\heartsuit</code>	$\heartsuit$	<code>\spadesuit</code>	$\spadesuit$
<code>\neg</code>	$\neg$		
<code>\Box</code>	$\Box$	<code>\Diamond</code>	$\Diamond$
<code>\mho</code>	$\mho$		
<code>\hslash</code>	$\hslash$	<code>\complement</code>	$\complement$
<code>\backprime</code>	$\backprime$	<code>\vartriangle</code>	$\triangle$
<code>\Bbbk</code>	$\mathbb{k}$	<code>\varnothing</code>	$\emptyset$
<code>\diagup</code>	$\diagup$	<code>\diagdown</code>	$\diagdown$
<code>\blacktriangle</code>	$\blacktriangle$	<code>\blacktriangledown</code>	$\blacktriangledown$
<code>\triangledown</code>	$\triangledown$	<code>\Game</code>	$\Game$
<code>\square</code>	$\square$	<code>\blacksquare</code>	$\blacksquare$
<code>\lozenge</code>	$\lozenge$	<code>\blacklozenge</code>	$\blacklozenge$
<code>\measuredangle</code>	$\measuredangle$	<code>\sphericalangle</code>	$\sphericalangle$
<code>\circledS</code>	$\circledS$	<code>\bigstar</code>	$\bigstar$
<code>\Finv</code>	$\Finv$	<code>\eth</code>	$\eth$
<code>\nexists</code>	$\nexists$		

This table is divided into two parts. The top part contains the symbols provided by L^AT_EX; the last three commands require the latexsym package. The bottom table lists symbols from the $\mathcal{A}\mathcal{M}\mathcal{S}$; they all require the amssymb package.

A.9 Math spacing commands

Short form:	Full form:	Size:	Short form:	Full form:
<code>\,</code>	<code>\thinspace</code>	μ	<code>\!</code>	<code>\negthinspace</code>
<code>\:</code>	<code>\medspace</code>	μ		<code>\negmedspace</code>
<code>\;</code>	<code>\thickspace</code>	μ		<code>\negthickspace</code>
	<code>\quad</code>	$\sqcup$		
	<code>\qquad</code>	$\sqcup\sqcup$		

The `\medspace`, `\thickspace`, `\negmedspace`, and `\negthickspace` commands require the `amsmath` package.

A.10 Delimiters

Name:	Type:	Print:	Name:	Type:	Print:
Left paren	<code>(</code>	$($	Right paren	<code>)</code>	$)$
Left bracket	<code>[</code>	$[$	Right bracket	<code>]</code>	$]$
Left brace	<code>\{</code>	$\{$	Right brace	<code>\}</code>	$\}$
Reverse slash	<code>\backslash</code>	$\backslash$	Forward slash	<code>/</code>	$/$
Left angle	<code>\angle</code>	$\angle$	Right angle	<code>\rangle</code>	$\rangle$
Vertical line	<code> </code>	$ $	Double vert. line	<code>\ </code>	$\ $
Left floor	<code>\lfloor</code>	$\lfloor$	Right floor	<code>\rfloor</code>	$\rfloor$
Left ceiling	<code>\lceil</code>	$\lceil$	Right ceiling	<code>\rceil</code>	$\rceil$
Upper left corner	<code>\ulcorner</code>	$\ulcorner$	Upper right corner	<code>\urcorner</code>	$\urcorner$
Lower left corner	<code>\llcorner</code>	$\llcorner$	Lower right corner	<code>\lrcorner</code>	$\lrcorner$

The corners require the `amsmath` package.

Name:	Type:	Print:
Upward arrow	<code>\uparrow</code>	$\uparrow$
Double upward arrow	<code>\Uparrow</code>	$\Uparrow$
Downward arrow	<code>\downarrow</code>	$\downarrow$
Double downward arrow	<code>\Downarrow</code>	$\Downarrow$
Up-and-down arrow	<code>\updownarrow</code>	$\updownarrow$
Double up-and-down arrow	<code>\Updownarrow</code>	$\Updownarrow$

A.11 Operators

<code>\arccos</code>	<code>\arcsin</code>	<code>\arctan</code>	<code>\arg</code>
<code>\cos</code>	<code>\cosh</code>	<code>\cot</code>	<code>\coth</code>
<code>\csc</code>	<code>\dim</code>	<code>\exp</code>	<code>\hom</code>
<code>\ker</code>	<code>\lg</code>	<code>\ln</code>	<code>\log</code>
<code>\sec</code>	<code>\sin</code>	<code>\sinh</code>	<code>\tan</code>
<code>\tanh</code>			
<code>\varliminf</code>	<code>\varlimsup</code>	<code>\varinjlim</code>	<code>\varprojlim</code>

The `\var` commands require the `amsmath` package.

<code>\det</code>	<code>\gcd</code>	<code>\inf</code>	<code>\injlim</code>
<code>\lim</code>	<code>\liminf</code>	<code>\limsup</code>	<code>\max</code>
<code>\min</code>	<code>\projlim</code>	<code>\Pr</code>	<code>\sup</code>

The `\injlim` and `\projlim` commands require the `amsmath` package.

Type:	Inline	Displayed	Type:	Inline	Displayed
<code>\prod_{i=1}^n</code>	$\prod_{i=1}^n$	$\prod_{i=1}^n$	<code>\coprod_{i=1}^n</code>	$\coprod_{i=1}^n$	$\coprod_{i=1}^n$
<code>\bigcap_{i=1}^n</code>	$\bigcap_{i=1}^n$	$\bigcap_{i=1}^n$	<code>\bigcup_{i=1}^n</code>	$\bigcup_{i=1}^n$	$\bigcup_{i=1}^n$
<code>\bigwedge_{i=1}^n</code>	$\bigwedge_{i=1}^n$	$\bigwedge_{i=1}^n$	<code>\bigvee_{i=1}^n</code>	$\bigvee_{i=1}^n$	$\bigvee_{i=1}^n$
<code>\bigsqcup_{i=1}^n</code>	$\bigsqcup_{i=1}^n$	$\bigsqcup_{i=1}^n$	<code>\biguplus_{i=1}^n</code>	$\biguplus_{i=1}^n$	$\biguplus_{i=1}^n$
<code>\bigotimes_{i=1}^n</code>	$\bigotimes_{i=1}^n$	$\bigotimes_{i=1}^n$	<code>\bigoplus_{i=1}^n</code>	$\bigoplus_{i=1}^n$	$\bigoplus_{i=1}^n$
<code>\bigodot_{i=1}^n</code>	$\bigodot_{i=1}^n$	$\bigodot_{i=1}^n$	<code>\sum_{i=1}^n</code>	$\sum_{i=1}^n$	$\sum_{i=1}^n$

A.12 *Math accents*

<code>\hat{a}</code>	$\hat{a}$	<code>\Hat{a}</code>	$\hat{a}$	<code>\widehat{a}</code>	$\widehat{a}$	<code>a\sphat</code>	a°
<code>\tilde{a}</code>	$\tilde{a}$	<code>\Tilde{a}</code>	$\tilde{a}$	<code>\widetilde{a}</code>	$\widetilde{a}$	<code>a\sptilde</code>	$a^{\sim}$
<code>\acute{a}</code>	$\acute{a}$	<code>\Acute{a}</code>	$\acute{a}$				
<code>\bar{a}</code>	$\bar{a}$	<code>\Bar{a}</code>	$\bar{a}$				
<code>\breve{a}</code>	$\breve{a}$	<code>\Breve{a}</code>	$\breve{a}$			<code>a\spbreve</code>	a^{v}
<code>\check{a}</code>	$\check{a}$	<code>\Check{a}</code>	$\check{a}$			<code>a\spcheck</code>	$a^{\vee}$
<code>\dot{a}</code>	$\dot{a}$	<code>\Dot{a}</code>	$\dot{a}$			<code>a\spdot</code>	$a^{\cdot}$
<code>\ddot{a}</code>	$\ddot{a}$	<code>\Ddot{a}</code>	$\ddot{a}$			<code>a\spddot</code>	$a^{\ddot{\cdot}}$
<code>\dddota</code>	$\dddota$					<code>a\spdddot</code>	$a^{\dddot{\cdot}}$
<code>\grave{a}</code>	$\grave{a}$	<code>\Grave{a}</code>	$\grave{a}$	<code>\imath</code>	$\imath$		
<code>\vec{a}</code>	$\vec{a}$	<code>\Vec{a}</code>	$\vec{a}$	<code>\jmath</code>	$\jmath$		

The `\dddot` and `\dddota` commands and all the capitalized commands require the `amsmath` package; the commands in the fourth column require the `amsxtra` package.

A.13 *Math font commands*

Type:	Print:
<code>\mathbf{A}</code>	$\mathbf{A}$
<code>\mathit{A}</code>	A
<code>\mathsf{A}</code>	A
<code>\mathrm{A}</code>	A
<code>\mathtt{A}</code>	$\mathtt{A}$
<code>\mathnormal{A}</code>	$\mathnormal{A}$
<code>\mathbb{A}</code>	$\mathbb{A}$
<code>\mathfrak{A}</code>	$\mathfrak{A}$
<code>\mathcal{A}</code>	$\mathcal{A}$
<code>\boldsymbol{\alpha}</code>	$\boldsymbol{\alpha}$

The `\mathbb`, `\mathfrak`, and `\mathcal` commands require the `amsmath` package. The `\boldsymbol` command requires the `amssymb` package.

B

Text symbol tables

B.1 Special text characters

Type:	Print:	Type:	Print:	Type:	Print:
\#	#	\\$	\$	\%	%
\&	&	\~{ }	~	_	-
\~{ }	^	\{	{	\}	}
\$		@	@	\$*\$	*
		\$\$backslash\$	\		

B.2 Text accents

Type:	Print:	Type:	Print:	Type:	Print:
\'{o}	ò	\'{}{o}	ó	\"{}{o}	ö
\H{o}	ő	\^{}{o}	ô	\~{}{o}	õ
\v{o}	ö	\u{o}	ů	\={o}	ō
\b{o}	ḡ	\.{}{o}	ó	\d{o}	ơ
\c{o}	ç	\r{o}	ř	\t{oo}	ôo
\i	ı			\j	ĵ

B.3 Some European characters

Type:	Print:	Type:	Print:	Type:	Print:
\aa	å	\AA	Å	\ae	æ
\AE	Æ	\o	ø	\O	Ø
\oe	œ	\OE	Œ	\l	ł
\L	Ł	\ss	ß	\SS	ŠŠ
?‘	¿	!‘	¡		

B.4 Extra text symbols

Type:	Print:
\dag	†
\ddag	‡
\S	§
\P	¶
\copyright	©
\pounds	£
\textbullet	•
\textvisiblespace	␣
\textcircled{a}	Ⓐ
\textperiodcentered	·

B.5 Text spacing commands

Short form:	Full form:	Size:	Short form:	Full form:
<code>\,</code>	<code>\thinspace</code>	μ	<code>\!</code>	<code>\negthinspace</code>
<code>\:</code>	<code>\medspace</code>	μ		<code>\negmedspace</code>
<code>\;</code>	<code>\thickspace</code>	μ		<code>\negthickspace</code>
	<code>\quad</code>	$\sqcup$		
	<code>\qquad</code>	$\sqcup\sqcup$		

The `\medspace`, `\thickspace`, `\negmedspace`, and `\negthickspace` commands require the `amsmath` package.

B.6 Text font commands

command with argument	command declaration	switch to
<code>\textnormal{...}</code>	<code>{\normalfont ...}</code>	document font family
<code>\textrm{...}</code>	<code>{\rmfamily ...}</code>	roman font family
<code>\textsf{...}</code>	<code>{\sffamily ...}</code>	sans serif font family
<code>\texttt{...}</code>	<code>{\ttfamily ...}</code>	typewriter style font family
<code>\textup{...}</code>	<code>{\upshape ...}</code>	upright shape
<code>\textit{...}</code>	<code>{\itshape ...}</code>	<i>italic shape</i>
<code>\textsl{...}</code>	<code>{\slshape ...}</code>	<i>slanted shape</i>
<code>\textsc{...}</code>	<code>{\scshape ...}</code>	SMALL CAPITALS
<code>\emph{...}</code>	<code>{\em ...}</code>	<i>emphasis</i>
<code>\textbf{...}</code>	<code>{\bfseries ...}</code>	bold (extended)
<code>\textmd{...}</code>	<code>{\mdseries ...}</code>	normal weight and width

B.7 *Text font size changes*

<code>\tiny</code>	sample text
<code>\scriptsize</code>	sample text
<code>\footnotesize</code>	sample text
<code>\small</code>	sample text
<code>\normalsize</code>	sample text
<code>\large</code>	sample text
<code>\Large</code>	sample text
<code>\LARGE</code>	sample text
<code>\huge</code>	sample text
<code>\Huge</code>	sample text

B.8 *AMS text font size changes*

<code>\Tiny</code>	sample text
<code>\tiny</code>	sample text
<code>\SMALL</code> or <code>\scriptsize</code>	sample text
<code>\Small</code> or <code>\footnotesize</code>	sample text
<code>\small</code>	sample text
<code>\normalsize</code>	sample text
<code>\large</code>	sample text
<code>\Large</code>	sample text
<code>\LARGE</code>	sample text
<code>\huge</code>	sample text
<code>\Huge</code>	sample text

Afterword

This book is based on my earlier book *Math into T_EX: A simple introduction to $\mathcal{A}\mathcal{M}\mathcal{S}$ -L^AT_EX* [13]. Although the topic changed considerably, I borrowed a fair amount of material from that book.

So it may be appropriate to begin by thanking here those who helped me with the earlier book. Harry Lakser was extremely generous with his time; Michael Doob and Craig Platt assisted me with T_EX and UNIX; and David Kelly and Arthur Gerhard read and commented on an early version of that manuscript. Michael Downes, Frank Mittelbach, and Ralph Freese read various drafts. Richard Ribstein read the third and fourth drafts very conscientiously.

The first draft of this new book was read for the publisher by

- David Carlisle (of the L^AT_EX3 team)
- Michael J. Downes (the project leader of the $\mathcal{A}\mathcal{M}\mathcal{S}$ team)
- Fernando Q. Gouvêa (Colby College)
- Frank Mittelbach (the project leader of the L^AT_EX3 team)
- Tobias Oetiker (De Montfort University)
- Nico A. F. M. Poppelier (Elsevier Science Publishers)

Together they produced a huge tutorial on L^AT_EX for my benefit. I hope that I succeeded in passing on to you some of what I learned from them.

On February 8, 1995, a short announcement was posted on the Internet (in the `comp.text.tex` newsgroup) asking for volunteers to read the first draft. The response was overwhelming.

I received reports from the following volunteers:

- Jeff Adler (University of Chicago, Chicago, IL, USA)
- Helmer Aslaksen (National University of Singapore, Singapore, Republic of Singapore)
- Andrew Caird (University of Michigan Center for Parallel Computing, Ann Arbor, MI, USA)

- Michael Carley (Trinity College, Dublin, Ireland)
- Miroslav Dont (Czech Technical University, Prague, The Czech Republic)
- Simon P. Eveson (University of York, Heslington, York, England)
- Weiqi Gao (St. Louis, MO, USA)
- Suleyman Guleypoglu (Concurrent Technologies Corporation, Johnstown, PA, USA)
- Peter Gruter (Laboratoire Kastler Brossel, Paris, France)
- Chris F.W. Hendriks (National Aerospace Laboratory, Amsterdam, The Netherlands)
- Mark Higgins (Global Seismology, British Geological Survey, Edinburgh, Scotland)
- Zhihui Huang (University of Michigan, Ann Arbor, MI, USA)
- David M. Jones (Information and Computation, MIT Laboratory for Computer Science, Cambridge, MA, USA)
- Alexis Kotte and John van der Koijk (University Hospital Utrecht, Utrecht, The Netherlands)
- Donal Lyons (Trinity College, Dublin, Ireland)
- Michael Lykke (Roskilde, Denmark)
- Steve Niu (University of Toronto, Toronto, ON, Canada)
- Piet van Oostrum (Utrecht University, Utrecht, The Netherlands)
- Denis Roegel (CRIN, Nancy, France)
- Kevin Ruland (Washington University, St. Louis, MO, USA)
- Thomas R. Scavo (Syracuse, NY, USA)
- Peter Schmitt (University of Vienna, Vienna, Austria)
- Nandor Sieben (Arizona State University, Tempe, AZ, USA)
- Paul Thompson (Case Western Reserve University, Cleveland, OH, USA)
- Ronald M. Tol (University of Groningen, Groningen, The Netherlands)
- Ernst U. Wallenborn (Federal Institute of Technology, Zurich, Switzerland)
- Doug Webb (Knoxville, TN, USA)

There were many volunteers, ranging in expertise from users who wanted to learn more about L^AT_EX, to experts in charge of large L^AT_EX installations, to internationally known experts whose names are known to many L^AT_EX users; and ranging in background from graduate students, to professional mathematicians, computer scientists, chemical engineers, psychiatrists, and consultants. I would like to thank them all for their enthusiastic reports. They shared their learning and their teaching experiences. This has become a much better book for their contributions.

I also received carefully crafted reports on Chapter 10 from Oren Patashnik (Stanford University), the author of B_IB_TE_X.

Based on these reports (ranging in size from two pages to over thirty pages), the manuscript has been rewritten, most of it has been reorganized, and sections have been added or deleted. I felt that as a result of the major changes probably many new errors have been introduced. So the second draft was again sent to

three readers; Jeff Adler, Simon P. Eveson, and David M. Jones sent me 27 pages of reports, confirming my suspicions. My deepest appreciation to these three individuals for their excellent repeat performance.

In the meanwhile, Merry Obrecht Sawdey undertook the visual design of the book. She also lent a helping hand in the final typesetting of the book.

The manuscript then was sent to the technical editor, Thomas R. Scavo, who flooded it with red ink; it would be hard to overstate the importance of his work. The final version of the book was checked again by him.

Last but not least, I want to thank Edwin Beschler, who believed in the project from the very beginning.

Index

#, 5
\# (#), 356
\$, 5
\$ (inline math delimiter), 11
\\$ (\$), 356
%, 5, 6
 commenting out, 6
\% (%), 5, 356
&, 5
 alignment point, 32, 33
\& (&), 356
\' (' accent), 357
(, 5
((math delimiter), 353
, 5
) (math delimiter), 353
*, 5
\$*\$ (*), 356
@, 5
+, 5, 15
, (comma), 5
\, (thin space, also \thinspace), 353, 358
- (dash, hyphen, minus), 15
\- (optional hyphen), 8
-- (number ranges, en-dash), 10
--- (em-dash), 10
. (period), 5
\. (' accent), 357
 ... (ellipsis), 17
/ (math delimiter), 353
/ (slash), 5, 15
: (colon), 5
\: (medium space, also \medspace), 353, 358
; (semicolon), 5
\; (thick space, also \thickspace), 353, 358
<, 10
=, 5
\= (= accent), 357
>, 10
" (double quote), 5, 7
\" (" accent), 357
? (question mark), 5
?' ('), 357
! (exclamation mark), 5
!' ('), 357
\! (negative thin space, also \negthinspace), 353, 358
[, 5
[(math delimiter), 353
\[(start displayed math), 11
\, 5, 9
 start of command, 9
\ (math delimiter), 353
{, 5
{ (math delimiter), 353

- $\backslash{}$ ($\{$), 356
- $\}$, 5
- $\}$ (math delimiter), 353
- $\}$ ($\}$), 356
- $\backslash\backslash$
 - row/line separator, 18, 31–33
- $\]$, 5
- $\]$ (math delimiter), 353
- $\]$ (end displayed math), 11
- $\^$, 5
- $\^$ ($\^$ accent), 357
- $_$ (underscore), 5, 15
- $_$ ($_$ accent), 357
- $\‘$ (left quote), 5
- $\’$ (right quote), 5
- $\|$, 5, 10
- $\$|$ ($|$), 356
- $|$ (math delimiter), 28, 353
- $\|$ ($\|$ math delimiter), 353
- $\sim$ ($\sim$ accent), 357
- $\sim$, 5
- $\AA$ ($\text{\AA}$), 357
- $\aa$ ($\text{\aa}$), 357
- abstract environment, 36
- abstract in article, 36
- accent
 - European, 10, 357
 - math, 16, 355
- accented character, 10, 357
- $\Acute$ ($\acute$ math accent), 355
- $\acute$ ($\acute$ math accent), 355
- Jeff Adler, 416, 418
- $\AE$ ($\text{\AE}$), 357
- $\ae$ ($\text{\ae}$), 357
- $\aleph$ ($\aleph$), 345
- align, 31
 - annotated, 31, 32
 - simple, 31
- align (math environment), 31, 32
- aligned multiline formula, 31
- alignment point, 32, 33
- α (α), 346
- Alt key, 5
- $\amalg$ ($\amalg$), 347, 350
- $\mathcal{A}\mathcal{M}\mathcal{S}$ document class, xxiii
- amsart (document class), xxiii, 33, 41
- ambsy (package), 54
- AMSFonTS, 51, 52
- amstext (package), xxiii, 12, 51, 54
- $\mathcal{A}\mathcal{M}\mathcal{S}$ -L^AT_EX, xx, xxii–xxiv, xxv, 23, 52–54
- amsmath (package), 15–20, 23, 30–33, 35, 41, 50, 51, 54, 346, 350, 353–355, 358
- amsopn (package), 54
- amssymb (package), 12, 15, 20, 23, 35, 41, 54, 346–352
- $\mathcal{A}\mathcal{M}\mathcal{S}$ -T_EX, xxv
- amstext (package), 19, 54
- amsthm (package), 50, 54
- amstxtra (package), 355
- $\And$ ($\&$), 350
- $\and$, 42, 43
- $\angle$ ($\angle$), 352
- annotated align, 31, 32
- $\approx$ ($\approx$), 347
- $\approx$ ($\approx$), 348
- $\arccos$ (arccos operator), 354
- $\arcsin$ (arcsin operator), 354
- $\arctan$ (arctan operator), 354
- $\arg$ (arg operator), 354
- argument of command, 9, 11, 12, 14
 - optional, 19
- arithmetic operation, 15
- arrow, 351
- article, 34–46
 - abstract, 36
 - bibliography, 38–40
 - body, 35
 - design, 48
 - preamble, 34–35
 - sample
 - intrart, xx, 34–40, 46, 48
 - sampart, xx–xxiii, 33, 49, 50

- sampart2, 50, 56
- sectioning, 43
- template, 41–42
- top matter, 35, 36, 41, 42, 43
- article (document class), 34, 41, 42, 49, 51
- article.tpl, 41
- article2.tpl, 41
- Helmer Aslaksen, 416
- \ast (*), 350
- \asymp ($\asymp$), 347
- aux file, 30, 55
- \b (_ accent), 357
- \backepsilon (ϵ), 348
- \backprime ($\backprime$), 352
- \backsim ($\sim$), 348
- \backsimeq ($\backsimeq$), 348
- \backslash (\backslash), 352
- \backslash\$ (\backslash\$), 356
- \backslash (math delimiter), 353
- \Bar ($\bar{}$ math accent), 355
- \bar ($\bar{}$ math accent), 16, 27, 355
- \barwedge ($\bar{\wedge}$), 350
- \Bbbk ($\mathbb{k}$), 352
- \because ($\because$), 348
- Edwin Beschler, 418
- \beta (β), 346
- \beth ($\beth$), 345
- \between ($\between$), 348
- \bfseries, 358
- \bibitem, 30, 38, 41, 45
- bibliography, 38–40
- \bigcap ($\bigcap$ large operator), 354
- \bigcirc ($\bigcirc$), 350
- \bigcup ($\bigcup$ large operator), 23, 354
- \biggl, 27
- \biggr, 27
- \bigodot ($\bigodot$ large operator), 354
- \bigoplus ($\bigoplus$ large operator), 354
- \bigotimes ($\bigotimes$ large operator), 354
- \bigsqcup ($\bigsqcup$ large operator), 354
- \bigstar ($\bigstar$), 352
- \bigtriangledown ($\bigtriangledown$), 350
- \bigtriangleup ($\bigtriangleup$), 350
- \biguplus ($\biguplus$ large operator), 354
- \bigvee ($\bigvee$ large operator), 24, 25, 354
- \bigwedge ($\bigwedge$ large operator), 25, 354
- binary operation, 350
- binary relation, 348
 - negated, 349
- \binom, 16, 21
- binomial, 16
- Blackboard bold math alphabet, xxiii, 24
- \blacklozenge ($\blacklozenge$), 352
- \blacksquare ($\blacksquare$), 352
- \blacktriangle ($\blacktriangle$), 352
- \blacktriangledown ($\blacktriangledown$), 352
- \blacktriangleleft ($\blacktriangleleft$), 348
- \blacktriangleright ($\blacktriangleright$), 348
- blank delimiter, 25
- blank line
 - marking end of paragraph, 7
- \bmatrix (subsidiary math environment), 18
- body of article, 35
- \bot ($\bot$), 352
- \bowtie ($\bowtie$), 347
- \Box ($\Box$), 352
- \boxdot ($\boxdot$), 350
- \boxminus ($\boxminus$), 350
- \boxplus ($\boxplus$), 350
- brace
 - closing, 14
- \Breve ($\breve{}$ math accent), 355
- \breve ($\breve{}$ math accent), 355
- \bullet ($\bullet$), 350
- \Bumpeq ($\Bumpeq$), 348
- \bumpeq ($\bumpeq$), 348
- \c (, accent), 357
- Andrew Caird, 416
- calligraphic alphabet, 28
- \Cap ($\Cap$), 350

- `\cap` ($\cap$), 350
- Michael Carley, 417
- David Carlisle, xviii, 416
- cases (subsidiary math environment), 33
- `\cdot` ($\cdot$), 15, 350
- `\cdots` ($\cdots$), 17
- center, 9
- `\centerdot` ($\cdot$), 350
- centimeter, 10
- character, 4
 - accented, 10, 357
 - European, 10, 357
 - invalid, 5
 - math, 10
 - prohibited, 5
 - special, 5, 356
 - tab, 5, 7
- `\Check` ($\checkmark$ math accent), 355
- `\check` ($\checkmark$ math accent), 355
- `\chi` (χ), 346
- `\circ` ($\circ$), 350
- `\circeq` ($\doteq$), 348
- `\circledast` ($\circledast$), 350
- `\circledcirc` ($\circledcirc$), 350
- `\circleddash` ($\ominus$), 350
- `\circledS` ($\S$), 352
- `\cite`, 30, 45
- `\clubsuit` ($\clubsuit$), 352
- cm (dimensional unit), 10
- CM fonts, 51
- command
 - argument, 9, 11, 12, 14
 - start with `\`, 9
- Command key, 5
- commenting out, 6
- `\complement` ($\complement$), 352
- computer, xxi
- Computer Modern (CM) fonts, 51
- `\cong` ($\cong$), 347
- congruence, 16
- `\coprod` ($\coprod$ large operator), 354
- `\copyright` ($\copyright$), 357
- `\cos` (cos operator), 354
- `\cosh` (cosh operator), 354
- `\cot` (cot operator), 354
- `\coth` (coth operator), 354
- cross-referencing, 30
- `\csc` (csc operator), 354
- Ctrl key, 5
- `\Cup` ($\cup$), 350
- `\cup` ($\cup$), 350
- `\curlyeqprec` ($\preccurlyeq$), 348
- `\curlyeqsucc` ($\succcurlyeq$), 348
- `\curlyvee` ($\vee$), 350
- `\curlywedge` ($\wedge$), 350
- custom format, 57
- customized
 - preamble of article, 41–42
 - top matter of article, 41–42
- `\d` ($\d$ accent), 357
- `\dag` ($\dagger$ math symbol), 352
- `\dag` ($\dagger$ text symbol), 357
- `\dagger` ($\dagger$), 350
- `\daleth` ($\daleth$), 345
- dash, 10
 - em-dash, 10
 - en-dash, 10
- `\dashv` ($\dashv$), 347
- `\ddag` ($\ddagger$ math symbol), 352
- `\ddag` ($\ddagger$ text symbol), 357
- `\ddagger` ($\ddagger$), 350
- `\ddddot` ('''' math accent), 355
- `\dddot` (''' math accent), 355
- `\Ddot` ('' math accent), 355
- `\ddot` ('' math accent), 355
- delimiter, 16, 353
 - blank, 25
- `\Delta` (Δ), 346
- `\delta` (δ), 346
- `\det` (det operator), 354
- `\dfrac`, 28
- `\diagdown` ($\diagdown$), 352
- `\diagup` ($\diagup$), 352

- `\Diamond` ($\diamond$), 352
- `\diamond` ($\diamond$), 350
- `\diamondsuit` ($\diamond$), 352
- `\digamma` ($\mathcal{F}$), 346
- digit key, 4
- `\dim` (dim operator), 354
- displayed
 - math, 11
- `\div` ($\div$), 350
- `\divideontimes` ($\ast$), 350
- document class, xxii–xxiv, 6, 15, 34, 35, 42, 49, 51
 - $\mathcal{M}\mathcal{S}$, xxiii
 - amsart, xxiii, 33, 41
 - article, 34, 41, 42, 49, 51
 - option
 - draft, 8
- document (environment), 9, 20
- `\documentclass`, 12, 15
- Miroslav Dont, 417
- Michael Doob, 416
- `\Dot` (‘ math accent), 355
- `\dot` (‘ math accent), 355
- `\doteq` ($\doteq$), 347
- `\doteqdot` ($\doteqdot$), 348
- dotless i ($\mathfrak{i}$), 357
- dotless j ($\mathfrak{j}$), 357
- `\dotplus` ($\dot{+}$), 350
- `\dots` ($\cdots$ or $\ldots$), 17
- double quote, 5, 7
- `\doublebarwedge` ($\overline{\wedge}$), 350
- `\Downarrow` ($\Downarrow$ math delimiter), 353
- `\Downarrow` ($\Downarrow$), 351
- `\downarrow` ($\downarrow$ math delimiter), 353
- `\downarrow` ($\downarrow$), 351
- `\downdownarrows` ($\Downarrow$), 351
- Michael J. Downes, xviii, 416
- `\downharpoonleft` ($\Downarrow$), 351
- `\downharpoonright` ($\Downarrow$), 351
- draft (document class option), 8
- editor, 46, 51, 56
- `\ell` (ℓ), 352
- ellipsis ($\ldots$), 17
- `\em`, 358
- em-dash (—), 10
- `\emph`, 358
- emphasized text, 9
- `\emptyset` ($\emptyset$), 352
- en-dash (--), 10
- enter (return) key, 5
- environment, 4, 9
 - abstract, 36
 - document, 9, 20
 - thebibliography, 38
- `\epsilon` (ϵ), 346
- `\eqcirc` ($\equiv$), 348
- `\eqref`, 30
- `\eqslantgtr` ($\gtrless$), 348
- `\eqslantless` ($\lesseqgtr$), 348
- equation, 29–31
 - labelled, 30
 - referenced, 30
 - tagged, 31
- equation (math environment), 29–31
- `\equiv` ($\equiv$), 16, 347
- error message, 6, 13, 46–48
- `\errorcontextlines`, 6
- `\eta` (η), 346
- `\eth` ($\eth$), 352
- eufrak (package), 23
- Euler Script, xxiii
- European accent, 10, 357
- European character, 10, 357
- `\EuScript`, 355
- euscript (package), 355
- Simon P. Eveson, 417, 418
- exclamation mark, 5
- `\exists` ($\exists$), 352
- `\exp` (exp operator), 354
- `\fallingdotseq` ($\fallingdotseq$), 348
- file
 - aux, 30, 55
 - log, 54, 55

- source, 3, 6, 7, 9, 11, 22, 30, 44, 46, 48, 51, 54
- `\Finv` ($\lrcorner$), 352
- `\flat` ($\flat$), 352
- `flushleft` (text environment), 4
- `flushright` (text environment), 4, 9
- font
 - Computer Modern (CM), 51
- `\footnotesize`, 359
- `\forall` ($\forall$), 352
- format
 - custom, 57
 - LaTeX, xxii, 6, 20
 - plain, 51
- `\frac`, 15
- fraction, 15
- Fraktur math alphabet, xxiii, 23
- Ralph Freese, 416
- `\frown` ($\frown$), 347
- ftp
 - directory, 4
- `gallery.tex`, 22
- `\Game` ($\oslash$), 352
- `\Gamma` (Γ), 346
- `\gamma` (γ), 346
- WeiQi Gao, 417
- `\gcd` (gcd operator), 354
- `\geq` ($\geq$), 347
- `\geqslant` ($\geqslant$), 348
- Arthur Gerhard, 416
- `\gg` ($\gg$), 347
- `\ggg` ($\ggg$), 348
- `\gimel` ($\gimel$), 345
- `\gnapprox` ($\gtrapprox$), 349
- `\gneq` ($\gtrdot$), 349
- `\gneqq` ($\gtrdot$), 349
- `\gnsim` ($\gtrsim$), 349
- Fernando Q. Gouvêa, 416
- `\Grave` ($\grave{}$ math accent), 355
- `\grave` ($\grave{}$ math accent), 355
- Greek alphabet, 346
- Peter Gruter, 417
- `\gtrapprox` ($\gtrapprox$), 348
- `\gtrdot` ($\gtrdot$), 348
- `\gtreqless` ($\gtrless$), 348
- `\gtreqqless` ($\gtrless$), 348
- `\gtrless` ($\gtrless$), 348
- `\gtrsim` ($\gtrsim$), 348
- Suleyman Guleyupoglu, 417
- `\gvertneqq` ($\gtrdot$), 349
- `\H` (H accent), 357
- `\Hat` ($\hat{}$ math accent), 355
- `\hat` ($\hat{}$ math accent), 16, 355
- `\hbar` ($\hbar$), 352
- `\hdotsfor`, 28
- `\heartsuit` ($\heartsuit$), 352
- Hebrew letters, 345
- Peter Hendriks, 417
- Mark Higgins, 417
- `\hom` (hom operator), 354
- `\hookleftarrow` ($\hookleftarrow$), 351
- `\hookrightarrow` ($\hookrightarrow$), 351
- horizontal space
 - math, 353
 - text, 358
- `\hslash` ($\hspace$), 352
- HTML (markup language), xxi
- Zhihui Huang, 417
- `\Huge`, 359
- `\huge`, 359
- hyphen, 5, 10
 - optional, 8
- `\i` ($\i$), 357
- `\Im` ($\Im$), 352
- `\imath` ($\imath$), 352, 355
- `\in` ($\in$), 347
- in (dimensional unit), 10
- inch, 10
- `\inf` (inf operator), 354
- `\infty` (∞), 12, 352
- `\injl` (injl operator), 354
- inline
 - math environment, 11

- math formula, 11
- instruction
 - to L^AT_EX, 9, 51
- \int ($\int$), 4, 17, 28
- integral, 17
- interactive L^AT_EX, 54
- \intercal ($\intercal$), 350
- intrart (sample article), xx, 34–40, 46, 48
- invalid character, 5
- \iota (ι), 346
- \itshape, 358
- \j (j), 357
- \jmath (j), 352, 355
- \Join ($\Join$), 347
- David M. Jones, xviii, 417, 418
- \kappa (κ), 346
- David Kelly, 416
- \ker (ker operator), 354
- key, 4, 10
 - Alt, 5
 - Command, 5
 - Ctrl, 5
 - digit, 4
 - enter (return), 5
 - letter, 4
 - Option, 5
 - prohibited, 5
 - return, 5
 - space, 5
 - special, 5, 356
 - tab, 5, 7
- Donald E. Knuth, xviii, xx, 416
- John van der Kooij, 417
- Alexis Kotte, 417
- \L (L), 357
- \l (l), 357
- label, 30, 43, 44
- \label, 30, 43, 44
- Harry Lakser, 416
- \Lambda (Λ), 346
- \lambda (λ), 346
- \langle ($\langle$ math delimiter), 24, 353
- \LARGE, 359
- \Large, 359
- \large, 359
- large operator, 19, 354
- L^AT_EX, 51
 - format, xxii, 6, 20
 - interactive mode, 54
- L^AT_EX 2_ε, xviii
- latexsym (package), 347, 350–352
- \lceil ($\lceil$ math delimiter), 353
- \ldots ($\dots$), 17
- \leadsto ($\leadsto$), 351
- \left, 17, 23, 24, 27
- left single quote, 5, 7
- \left(($($ math delimiter), 16, 24, 32
- \left. (blank math delimiter), 25
- \Leftrightarrow ($\Leftrightarrow$), 351
- \leftarrow ($\leftarrow$), 351
- \leftarrowtail ($\leftarrowtail$), 351
- \leftharpoondown ($\leftharpoondown$), 351
- \leftharpoonup ($\leftharpoonup$), 351
- \leftleftarrows ($\leftleftarrows$), 351
- \Leftrightarrow ($\Leftrightarrow$), 351
- \leftrightharrow ($\leftrightharrow$), 351
- \leftrightharpoons ($\leftrightharpoons$), 351
- \leftthreetimes ($\leftthreetimes$), 350
- \leq ($\leq$), 347
- \leqslant ($\leqslant$), 348
- \lessapprox ($\lessapprox$), 348
- \lessdot ($\lessdot$), 348
- \lesseqgtr ($\lesseqgtr$), 348
- \lesseqqgtr ($\lesseqqgtr$), 348
- \lessgtr ($\lessgtr$), 348
- \lesssim ($\lesssim$), 348
- letter key, 4
- \lfloor ($\lfloor$ math delimiter), 353
- \lg (lg operator), 354

- `\lhd` ($\triangleleft$), 350
- `\lim` (lim operator), 11, 17, 354
- `\liminf` (lim inf operator), 354
- `\limsup` (lim sup operator), 354
- line in text
 - too wide, 7
- line separator (`\`), 18, 31, 32
- line too wide, 7
- `\listfiles`, 55
- `\ll` ($\ll$), 347
- `\Lleftarrow` ($\Leftarrow$), 351
- `\lll` ($\lll$), 348
- `\ln` (ln operator), 354
- `\lnapprox` ($\approx$), 349
- `\lneq` ($\lesssim$), 349
- `\lneqq` ($\lesseqgtr$), 349
- `\lnsim` ($\lesssim$), 349
- `\log` (log operator), 354
- log file, 54, 55
- logical unit, 49
- `\Longleftarrow` ($\Longleftarrow$), 351
- `\longleftarrow` ($\longleftrightarrow$), 351
- `\Longleftrightharpoonrightarrow` ($\Longleftrightarrow$), 351
- `\longleftrightharpoonrightarrow` ($\longleftrightarrow$), 351
- `\longmapsto` ($\mapsto$), 351
- `\Longrightarrow` ($\Rightarrow$), 351
- `\longrightarrow` ($\longrightarrow$), 351
- `\looparrowleft` ($\looparrowleft$), 351
- `\looparrowright` ($\looparrowright$), 351
- `\lozenge` ($\diamond$), 352
- `\ltimes` ($\ltimes$), 350
- `\lvertneqq` ($\nlessgtr$), 349
- Michael Lykke, 417
- Donal Lyons, 417
- `\maketitle`, 35
- `\mapsto` ($\mapsto$), 23, 351
- markup language, xx
 - HTML, xxi
- math, 10–33
 - accent, 16, 355
 - character, 10
 - displayed, 11
 - inline, 11
 - symbol, 346–355
- math environment
 - align, 31, 32
 - annotated align, 31, 32
 - equation, 29–31
 - inline, 11
 - simple align, 31
 - subsidiary, 33
- math font
 - AMSFonTS, xxiii, 51, 52
 - Blackboard bold, xxiii, 24
 - calligraphic, 28
 - Euler Script, xxiii
 - Fraktur, xxiii, 23
- `math.tex` (sample file), 11, 12
- `mathb.tex` (sample file), 12, 13
- `\mathbb`, 24, 355
- `\mathbf`, 355
- `\mathcal`, 355
- `\mathfrak`, 355
- `\mathit`, 355
- `\mathrm`, 355
- `\mathsf`, 355
- `\mathtt`, 355
- matrix (subsidiary math environment), 18
- `\max` (max operator), 354
- `\mbox`, 19
- `\mdseries`, 358
- `\measuredangle` ($\sphericalangle$), 352
- `\medspace` (medium space, also `\:`), 353, 358
- `\mho` (Ω), 352
- `\mid` ($\mid$), 23, 347
- `\min` (min operator), 354
- minus, 15
 - Frank Mittelbach, xviii, 416
- `\models` ($\models$), 347
- `\mp` ($\mp$), 350
- `\mu` (μ), 346
- multiline formula, 31

- annotated aligned, 32
- simple align, 31
- `\multimap` ($\multimap$), 351
- multiplication, 15
- `\natural` ($\natural$), 352
- `\ncong` ($\ncong$), 349
- `\ne` ($\neq$), 349
- `\nearrow` ($\nearrow$), 351
- `\neg` ($\neg$), 352
- negated binary relation, 349
- `\negmedspace` (negative medium space), 353, 358
- `\negthickspace` (negative thick space), 353, 358
- `\negthinspace` (negative thin space, also `\!`), 353, 358
- `\nexists` ($\nexists$), 352
- `\ngeq` ($\ngeq$), 349
- `\ngeqq` ($\ngeqq$), 349
- `\ngeqslant` ($\ngeqslant$), 349
- `\ngtr` ($\ngtr$), 349
- `\ni` ($\ni$), 347
- Steve Niu, 417
- `\nLeftarrow` ($\nLeftarrow$), 351
- `\nleftarrow` ($\nleftarrow$), 351
- `\nLeftrightarrow` ($\nLeftrightarrow$), 351
- `\nleqtrightharpoonrightarrow` ($\nleqtrightharpoonrightarrow$), 351
- `\nleq` ($\nleq$), 349
- `\nleqq` ($\nleqq$), 349
- `\nleqslant` ($\nleqslant$), 349
- `\nless` ($\nless$), 349
- `\nmid` ($\nmid$), 349
- `\normalsize`, 359
- `\notag`, 32
- `note1.tex` (sample file), 6, 7
- `note1b.tex` (sample file), 7, 8
- `note2.tex` (sample file), 9
- `noteslug.tex` (sample file), 8
- `\notin` ($\notin$), 349
- `\nparallel` ($\nparallel$), 349
- `\nprec` ($\nprec$), 349
- `\npreceq` ($\npreceq$), 349
- `\nrightarrow` ($\nrightarrow$), 351
- `\nrightharpoonrightarrow` ($\nrightharpoonrightarrow$), 351
- `\nshortmid` ($\nshortmid$), 349
- `\nshortparallel` ($\nshortparallel$), 349
- `\nsim` ($\nsim$), 349
- `\nsubseteq` ($\nsubseteq$), 349
- `\nsubseteqq` ($\nsubseteqq$), 349
- `\nsucc` ($\nsucc$), 349
- `\nsucceq` ($\nsucceq$), 349
- `\nsupseteq` ($\nsupseteq$), 349
- `\nsupseteqq` ($\nsupseteqq$), 349
- n th root, 19
- `\ntriangleleft` ($\ntriangleleft$), 349
- `\ntrianglelefteq` ($\ntrianglelefteq$), 349
- `\ntriangleright` ($\ntriangleright$), 349
- `\ntrianglerighteq` ($\ntrianglerighteq$), 349
- `\nu` (ν), 346
- number range, 10
- `\nVDash` ($\nVDash$), 349
- `\nVdash` ($\nVdash$), 349
- `\nvDash` ($\nvDash$), 349
- `\nvdash` ($\nvdash$), 349
- `\nwarrow` ($\nwarrow$), 351
- `\O` ($\O$), 357
- `\o` ($\o$), 357
- `\odot` ($\odot$), 350
- `\OE` ($\OE$), 357
- `\oe` ($\oe$), 357
- Tobias Oetiker, 416
- `\Omega` (Ω), 346
- `\omega` (ω), 346
- `\ominus` ($\ominus$), 350
- Piet van Oostrum, 417
- operation
 - arithmetic, 15
- operator, 17, 354
 - large, 19, 354
- `\oplus` ($\oplus$), 350
- Option key, 5
- optional
 - argument, 19
 - hyphen, 8

- `\oslash` ($\oslash$), 350
- `\otimes` ($\otimes$), 350
- `\overbrace`, 26
- `Overfull \hbox`, 7, 8
- `overline`, 27, 28
- `\overline`, 27, 28
- `\overset`, 25, 26, 38, 48
- `\P` ($\P$ math symbol), 352
- `\P` ($\P$ text symbol), 357
- packages
 - `amsbsy`, 54
 - `amsfonts`, xxiii, 12, 51, 54
 - `amsmath`, 15–20, 23, 30–33, 35, 41, 50, 51, 54, 346, 350, 353–355, 358
 - `amsopn`, 54
 - `amssymb`, 12, 15, 20, 23, 35, 41, 54, 346–352
 - `amstext`, 19, 54
 - `amsthm`, 50, 54
 - `amsxtra`, 355
 - `eufrak`, 23
 - `euscript`, 355
 - `latexsym`, 347, 350–352
- paragraph
 - end of, 7
- `\parallel` ($\parallel$), 347
- parentheses, 5
- `\partial` (∂), 28, 352
- Oren Patashnik, 417
- period, 5
- `\perp` ($\perp$), 347
- personal computer, xxi
- `\Phi` (Φ), 346
- `\phi` (ϕ), 346
- `\Pi` (Π), 346
- `\pi` (π), 346
- `\pitchfork` ($\pitchfork$), 348
- `plain.fmt`, 51
- Craig Platt, 416
- `\pm` ($\pm$), 350
- `\pmatrix` (subsidiary math environment), 18, 28
- `\pmod`, 16
- `\pod`, 16
- point (font size), 8
- Nico A. F. M. Poppelier, 416
- `\pounds` (£ text symbol), 357
- `\Pr` (Pr operator), 354
- preamble of article, 34–35
- `\prec` ($\prec$), 347
- `\precapprox` ($\precapprox$), 348
- `\preccurlyeq` ($\preccurlyeq$), 348
- `\preceq` ($\preceq$), 347
- `\precnapprox` ($\precnapprox$), 349
- `\precneqq` ($\precneqq$), 349
- `\precnsim` ($\precnsim$), 349
- `\precsim` ($\precsim$), 348
- `\prime` ($\prime$), 352
- proclamation, 35
 - invoking, 44
- `\prod` ($\prod$ large operator), 19, 354
- product, 19
- prohibited character / key, 5
- `\projlim` (proj lim operator), 354
- prompt, 54
- `\propto` ($\propto$), 347
- `\Psi` (Ψ), 346
- `\psi` (ψ), 346
- pt (dimensional unit), 8
- punctuation mark, 5
- `\qqquad` (space command), 19, 353, 358
- `\quad` (space command), 17, 353, 358
- question mark, 5
- quotation mark, 5, 7
 - double quote, 5, 7
 - single quote, 5, 7
- `\r` ($^{\circ}$ accent), 357
- `\rangle` ($\rangle$ math delimiter), 24, 353
- `\rceil` ($\rceil$ math delimiter), 353
- `\Re` ($\Re$), 352

- `\ref`, 30, 31, 44
- reference in article, 38, 44
- references, 38
- referencing
 - bibliographic item, 45
 - label, 30, 43, 44
- return key, 5
- `\rfloor` ($\rfloor$ math delimiter), 353
- `\rhd` ($\rhd$), 350
- `\rho` (ρ), 346
- Richard Ribstein, 416
- `\right`, 17, 23, 24, 27
- right single quote, 5, 7
- `\right)` ($)$ math delimiter), 16, 24, 32
- `\Rrightarrow` ($\Rightarrow$), 351
- `\rightarrow` ($\rightarrow$, also `\to`), 12, 351
- `\rightarrowtail` ($\rightarrowtail$), 351
- `\rightharpoondown` ($\searrow$), 351
- `\rightharpoonup` ($\nearrow$), 351
- `\rightleftarrows` ($\rightleftarrows$), 351
- `\rightleftharpoons` ($\rightleftharpoons$), 351
- `\rightrightarrows` ($\rightrightarrows$), 351
- `\rightsquigarrow` ($\rightsquigarrow$), 351
- `\rightthreetimes` ($\times$), 350
- `\risingdotseq` ($\dot{=}$), 348
- `\rmfamily`, 358
- Denis Roegel, 417
- root, 12, 19
 - n th, 19
 - square, 12, 19
- row/line separator (`\`), 18, 31, 32
- `\Rrightarrow` ($\Rightarrow$), 351
- `\rtimes` ($\rtimes$), 350
- Kevin Ruland, 417
- `\S` (§ math symbol), 352
- `\S` (§ text symbol), 357
- `sampart` (sample article), xx–xxiii, 33, 49, 50
- `sampart2` (sample article), 50, 56
- Merry Obrecht Sawdey, 418
- Thomas R. Scavo, 417, 418
- Rainer Schöpf, xviii
- Peter Schmitt, 417
- `\scriptsize`, 359
- `\scshape`, 358
- `\searrow` ($\searrow$), 351
- `\sec` (sec operator), 354
- section, 44
- `\section`, 44
- sectioning of article, 43
 - paragraph, 44
 - section, 44
 - subparagraph, 44
 - subsection, 44
 - subsubsection, 44
- `\setminus` ($\setminus$), 350
- `\sffamily`, 358
- `\sharp` ($\sharp$), 352
- `\shortmid` ($\shortmid$), 348
- `\shortparallel` ($\shortparallel$), 348
- `\show`, 54
- Nandor Sieben, 417
- `\Sigma` (Σ), 346
- `\sigma` (σ), 346
- `\sim` ($\sim$), 347
- `\simeq` ($\simeq$), 347
- simple align, 31
- `\sin` (sin operator), 17, 354
- sine, 17, 354
- single quote, 5, 7
- `\sinh` (sinh operator), 354
- `\slshape`, 358
- `\SMALL`, 359
- `\Small`, 359
- `\small`, 359
- `\smallfrown` ($\smallfrown$), 348
- `\smallint` ($\smallint$), 352
- `\smallsetminus` ($\smallsetminus$), 350
- `\smallsmile` ($\smallsmile$), 348
- `\smile` ($\smile$), 347
- source file, xx, 3, 5–7, 9, 11, 22, 30, 44, 46, 48, 51, 54
- space

- key, 5
- rules
 - in text, 7
 - vertical, 10
- spacebar, 5
- `\spadesuit` ($\spadesuit$), 352
- `\spbreve` ($\sim$ math accent), 355
- `\spcheck` ($\vee$ math accent), 355
- `\spdddot` ($\cdots$ math accent), 355
- `\spddot` ($\ddot{}$ math accent), 355
- `\spdot` ($\dot{}$ math accent), 355
- special key/character, 5, 356
- `\sphat` ($\hat{}$ math accent), 355
- `\sphericalangle` ($\sphericalangle$), 352
- Michael Spivak, xviii
- `\sptilde` ($\sim$ math accent), 355
- `\sqcap` ($\sqcap$), 350
- `\sqcup` ($\sqcup$), 350
- `\sqrt` ($\sqrt{}$), 12, 19
- `\sqsubset` ($\sqsubset$), 347
- `\sqsubseteq` ($\sqsubseteq$), 347
- `\sqsupset` ($\sqsupset$), 347
- `\sqsupseteq` ($\sqsupseteq$), 347
- `\square` ($\square$), 352
- square root, 12, 19
- `\SS` ($\text{\text{SS}}$), 357
- `\ss` ($\text{\text{ss}}$), 357
- `\star` ($\star$), 350
- subscript, 15
- `\Subset` ($\Subset$), 348
- `\subset` ($\subset$), 347
- `\subseteq` ($\subseteq$), 347
- `\subseteqq` ($\subseteqq$), 348
- `\subsetneq` ($\subsetneq$), 349
- `\subsetneqq` ($\subsetneqq$), 349
- subsidiary math environment, 33
 - `bmatrix`, 18
 - cases, 33
 - `matrix`, 18
 - `pmatrix`, 18, 28
 - `Vmatrix`, 18, 26
 - `vmatrix`, 18, 26
- `\succ` ($\succ$), 347
- `\succapprox` ($\succapprox$), 348
- `\succcurlyeq` ($\succcurlyeq$), 348
- `\succeq` ($\succeq$), 347
- `\succnapprox` ($\succnapprox$), 349
- `\succneqq` ($\succneqq$), 349
- `\succnsim` ($\succnsim$), 349
- `\succsim` ($\succsim$), 348
- sum, 19, 20, 27
- `\sum` ($\sum$ large operator), 19, 20, 27, 354
- `\sup` (sup operator), 354
- superscript, 15
- `\Supset` ($\Supset$), 348
- `\supset` ($\supset$), 347
- `\supseteq` ($\supseteq$), 347
- `\supseteqq` ($\supseteqq$), 348
- `\supsetneq` ($\supsetneq$), 349
- `\supsetneqq` ($\supsetneqq$), 349
- `\surd` ($\surd$), 352
- `\swarrow` ($\swarrow$), 351
- symbolic referencing, 30
- `\t` ($\text{\text{t}}$ accent), 357
- tab character/key, 5, 7
- `\tag`, 30
- tagging equations, 31
- `\tan` (tan operator), 354
- `\tanh` (tanh operator), 354
- `\tau` (τ), 346
- `testart.tex`, 23
- $\text{\TeX}$, xx, xxi, 9, 51
- $\text{\TeX}$ log, 54, 55
- text, 3, 4
 - emphasized, 9
 - in math, 19
- `\text`, 19, 23, 54
- text environment, 9
 - flush right, 4, 9
- text symbol, 356–357
- `\textbf`, 9, 358
- `\textbullet` ($\bullet$ text symbol), 357
- `\textcircled` ($\bigcirc$ text symbol), 357

- `\textit`, 358
- `\textmd`, 358
- `\textperiodcentered` ($\cdot$ text symbol), 357
- `\textrm`, 358
- `\textsc`, 358
- `\textsf`, 358
- `\textsl`, 358
- `\textstyle`, 25
- `\texttt`, 358
- `\textup`, 358
- `\textvisiblespace` ($_$ text symbol), 357
- `thebibliography` (text environment), 38
- `\therefore` ($\therefore$), 348
- `\Theta` (Θ), 346
- `\theta` (θ), 346
- `\thickapprox` ($\approx$), 348
- `\thicksim` ($\sim$), 348
- `\thickspace` (thick space, also `\;`), 353, 358
- `\thinspace` (thin space, also `\,`), 4, 353, 358
- Paul Thompson, 417
- `\Tilde` ($\tilde$ math accent), 355
- `\tilde` ($\tilde$ math accent), 16, 355
- `\times` ($\times$), 15, 350
- `\Tiny`, 359
- `\tiny`, 359
- `\title`, 42, 43
- title page, 35
- `\to` ($\rightarrow$, also `\rightarrow`), 12, 351
- Ronald M. Tol, 417
- `\top` ($\top$), 352
- top matter, 35, 36, 41–43
- `\triangle` ($\triangle$), 352
- `\triangledown` (∇), 352
- `\triangleleft` ($\triangleleft$), 350
- `\trianglelefteq` ($\trianglelefteq$), 348
- `\triangleq` ($\triangleq$), 348
- `\triangleright` ($\triangleright$), 350
- `\trianglerighteq` ($\trianglerighteq$), 348
- `\ttfamily`, 358
- `\twoheadleftarrow` ($\twoheadleftarrow$), 351
- `\twoheadrightarrow` ($\twoheadrightarrow$), 351
- `\u` ($\u$ accent), 357
- `\underset`, 25
- `\unlhd` ($\unlhd$), 350
- `\unrhd` ($\unrhd$), 350
- `\Uparrow` ($\Uparrow$ math delimiter), 353
- `\Uparrow` ($\Uparrow$), 351
- `\uparrow` ($\uparrow$ math delimiter), 353
- `\uparrow` ($\uparrow$), 351
- `\Updownarrow` ($\Updownarrow$ math delimiter), 353
- `\Updownarrow` ($\Updownarrow$), 351
- `\updownarrow` ($\updownarrow$ math delimiter), 353
- `\updownarrow` ($\updownarrow$), 351
- `\upharpoonleft` ($\upharpoonleft$), 351
- `\upharpoonright` ($\upharpoonright$), 351
- `\uplus` ($\uplus$), 350
- `\upshape`, 358
- `\Upsilon` (Υ), 346
- `\upsilon` (υ), 346
- `\upuparrows` ($\upuparrows$), 351
- `\usepackage`, 12, 15, 20
- `\v` ($\v$ accent), 357
- `\varDelta` (Δ), 346
- `\varepsilon` (ε), 346
- `\varGamma` (Γ), 346
- `\varinjlim` ($\varinjlim$ operator), 354
- `\varkappa` ($\varkappa$), 346
- `\varLambda` (Λ), 346, 348
- `\varliminf` ($\varliminf$ operator), 354
- `\varlimsup` ($\varlimsup$ operator), 354
- `\varnothing` ($\emptyset$), 352
- `\varOmega` (Ω), 346
- `\varPhi` (Φ), 346
- `\varphi` (φ), 28, 346
- `\varPi` (Π), 346
- `\varpi` (ϖ), 346
- `\varprojlim` ($\varprojlim$ operator), 354
- `\varpropto` ($\propto$), 348

- `\varPsi` (Ψ), 346
- `\varrho` (ϱ), 346
- `\varSigma` (Σ), 346
- `\varsigma` (ς), 346
- `\varsubsetneq` ($\subsetneq$), 349
- `\varsubsetneqq` ($\subsetneqq$), 349
- `\varsupsetneq` ($\supsetneq$), 349
- `\varTheta` (Θ), 346
- `\vartheta` (ϑ), 346
- `\vartriangle` ($\triangle$), 352
- `\vartriangleleft` ($\triangleleft$), 348
- `\vartriangleright` ($\triangleright$), 348
- `\varUpsilon` (Υ), 346
- `\varXi` (Ξ), 346
- `\Vdash` ($\Vdash$), 348
- `\vDash` ($\vDash$), 348
- `\vdash` ($\vdash$), 347
- `\Vec` ($\vec{}$ math accent), 355
- `\vec` ($\vec{}$ math accent), 16, 355
- `\vee` ($\vee$), 25, 350
- `\veebar` ($\veebar$), 350
- version number, 55
- `\Vert` ($\|$ math symbol), 352
- vertical space, 10
- `Vmatrix` (subsidiary math environment), 18, 26
- `vmatrix` (subsidiary math environment), 18, 26
- `\vspace`, 10
- `\Vvdash` ($\Vvdash$), 348

- Ernst U. Wallenborn, 417
- Doug Webb, 417
- `\wedge` ($\wedge$), 350
- `\widehat` ($\hat{}$ math accent), 27, 355
- `\widetilde` ($\tilde{}$ math accent), 355
- work directory, 4, 6, 7, 9, 11, 12, 20, 41, 42
- World Wide Web, xxi
- `\wp` ($\wp$), 352
- `\wr` ($\wr$), 350

- `\Xi` (Ξ), 346
- `\xi` (ξ), 346
- `\xvarsupsetneqqx` ($\not\supsetneqq$), 349
- `\zeta` (ζ), 4, 346