The Comprehensive LaTeX Symbol List

Scott Pakin <scott+clsl@pakin.org>*

9 November 2009

Abstract

This document lists 5913 symbols and the corresponding LaTeX commands that produce them. Some of these symbols are guaranteed to be available in every LaTeX 2ε system; others require fonts and packages that may not accompany a given distribution and that therefore need to be installed. All of the fonts and packages used to prepare this document—as well as this document itself—are freely available from the Comprehensive TeX Archive Network (http://www.ctan.org/).

Contents

Contents **1**

1 Introduction **9**
1.1 Document Usage . . . 9
1.2 Frequently Requested Symbols . . . 9

2 Body-text symbols **10**
Table 1: LaTeX 2ε Escapable "Special" Characters . . . 10
Table 2: Predefined LaTeX 2ε Text-mode Commands . . . 10
Table 3: LaTeX 2ε Commands Defined to Work in Both Math and Text Mode . . . 10
Table 4: $\mathcal{AMS}$ Commands Defined to Work in Both Math and Text Mode . . . 11
Table 5: Non-ASCII Letters (Excluding Accented Letters) . . . 11
Table 6: Letters Used to Typeset African Languages . . . 11
Table 7: Letters Used to Typeset Vietnamese . . . 11
Table 8: Punctuation Marks Not Found in OT1 . . . 11
Table 9: pifont Decorative Punctuation Marks . . . 12
Table 10: tipa Phonetic Symbols . . . 12
Table 11: tipx Phonetic Symbols . . . 13
Table 12: wsuipa Phonetic Symbols . . . 14
Table 13: wasysym Phonetic Symbols . . . 14
Table 14: phonetic Phonetic Symbols . . . 15
Table 15: t4phonet Phonetic Symbols . . . 15
Table 16: semtrans Transliteration Symbols . . . 15
Table 17: Text-mode Accents . . . 16
Table 18: tipa Text-mode Accents . . . 16
Table 19: extraipa Text-mode Accents . . . 18
Table 20: wsuipa Text-mode Accents . . . 18
Table 21: phonetic Text-mode Accents . . . 18
Table 22: metre Text-mode Accents . . . 18
Table 23: t4phonet Text-mode Accents . . . 19

*The original version of this document was written by David Carlisle, with several additional tables provided by Alexander Holt. See Section 8.8 on page 129 for more information about who did what.

Table 24: arcs Text-mode Accents . . . 19
Table 25: semtrans Accents . . . 19
Table 26: ogonek Accents . . . 19
Table 27: combelow Accents . . . 19
Table 28: wsuipa Diacritics . . . 20
Table 29: textcomp Diacritics . . . 20
Table 30: textcomp Currency Symbols . . . 20
Table 31: marvosym Currency Symbols . . . 20
Table 32: wasysym Currency Symbols . . . 20
Table 33: LaTeX 2e Currency Symbols . . . 21
Table 34: teubner Currency Symbols . . . 21
Table 35: eurosym Euro Signs . . . 21
Table 36: fourier Euro Signs . . . 21
Table 37: textcomp Legal Symbols . . . 21
Table 38: cclicenses Creative Commons License Icons . . . 21
Table 39: textcomp Old-style Numerals . . . 22
Table 40: Miscellaneous textcomp Symbols . . . 22
Table 41: Miscellaneous wasysym Text-mode Symbols . . . 22

3 Mathematical symbols **23**
Table 42: Math-Mode Versions of Text Symbols . . . 23
Table 43: cmll Unary Operators . . . 23
Table 44: Binary Operators . . . 24
Table 45: $\mathcal{AMS}$ Binary Operators . . . 24
Table 46: stmaryrd Binary Operators . . . 25
Table 47: wasysym Binary Operators . . . 25
Table 48: txfonts/pxfonts Binary Operators . . . 25
Table 49: mathabx Binary Operators . . . 26
Table 50: MnSymbol Binary Operators . . . 26
Table 51: mathdesign Binary Operators . . . 27
Table 52: cmll Binary Operators . . . 27
Table 53: shuffle Binary Operators . . . 27
Table 54: ulsy Geometric Binary Operators . . . 27
Table 55: mathabx Geometric Binary Operators . . . 28
Table 56: MnSymbol Geometric Binary Operators . . . 28
Table 57: Variable-sized Math Operators . . . 29
Table 58: $\mathcal{AMS}$ Variable-sized Math Operators . . . 29
Table 59: stmaryrd Variable-sized Math Operators . . . 29
Table 60: wasysym Variable-sized Math Operators . . . 29
Table 61: mathabx Variable-sized Math Operators . . . 30
Table 62: txfonts/pxfonts Variable-sized Math Operators . . . 31
Table 63: esint Variable-sized Math Operators . . . 32
Table 64: MnSymbol Variable-sized Math Operators . . . 32
Table 65: mathdesign Variable-sized Math Operators . . . 33
Table 66: cmll Large Math Operators . . . 33
Table 67: Binary Relations . . . 34
Table 68: $\mathcal{AMS}$ Binary Relations . . . 34
Table 69: $\mathcal{AMS}$ Negated Binary Relations . . . 34
Table 70: stmaryrd Binary Relations . . . 34
Table 71: wasysym Binary Relations . . . 35
Table 72: txfonts/pxfonts Binary Relations . . . 35
Table 73: txfonts/pxfonts Negated Binary Relations . . . 35
Table 74: mathabx Binary Relations . . . 36
Table 75: mathabx Negated Binary Relations . . . 36

Table 76: MnSymbol Binary Relations . . . 36
Table 77: MnSymbol Negated Binary Relations . . . 38
Table 78: mathtools Binary Relations . . . 39
Table 79: turnstile Binary Relations . . . 39
Table 80: trsym Binary Relations . . . 40
Table 81: trfsigns Binary Relations . . . 40
Table 82: cmll Binary Relations . . . 40
Table 83: colonequals Binary Relations . . . 41
Table 84: fourier Binary Relations . . . 41
Table 85: Subset and Superset Relations . . . 41
Table 86: $\mathcal{AMS}$ Subset and Superset Relations . . . 41
Table 87: stmaryrd Subset and Superset Relations . . . 41
Table 88: wasysym Subset and Superset Relations . . . 41
Table 89: txfonts/pxfonts Subset and Superset Relations . . . 41
Table 90: mathabx Subset and Superset Relations . . . 42
Table 91: MnSymbol Subset and Superset Relations . . . 42
Table 92: Inequalities . . . 42
Table 93: $\mathcal{AMS}$ Inequalities . . . 43
Table 94: wasysym Inequalities . . . 43
Table 95: txfonts/pxfonts Inequalities . . . 43
Table 96: mathabx Inequalities . . . 44
Table 97: MnSymbol Inequalities . . . 45
Table 98: $\mathcal{AMS}$ Triangle Relations . . . 46
Table 99: stmaryrd Triangle Relations . . . 46
Table 100: mathabx Triangle Relations . . . 46
Table 101: MnSymbol Triangle Relations . . . 47
Table 102: Arrows . . . 47
Table 103: Harpoons . . . 48
Table 104: textcomp Text-mode Arrows . . . 48
Table 105: $\mathcal{AMS}$ Arrows . . . 48
Table 106: $\mathcal{AMS}$ Negated Arrows . . . 48
Table 107: $\mathcal{AMS}$ Harpoons . . . 48
Table 108: stmaryrd Arrows . . . 48
Table 109: txfonts/pxfonts Arrows . . . 49
Table 110: mathabx Arrows . . . 49
Table 111: mathabx Negated Arrows . . . 49
Table 112: mathabx Harpoons . . . 49
Table 113: MnSymbol Arrows . . . 50
Table 114: MnSymbol Negated Arrows . . . 51
Table 115: MnSymbol Harpoons . . . 53
Table 116: MnSymbol Negated Harpoons . . . 53
Table 117: harpoon Extensible Harpoons . . . 54
Table 118: chemarrow Arrows . . . 54
Table 119: fge Arrows . . . 54
Table 120: MnSymbol Spoons . . . 54
Table 121: MnSymbol Pitchforks . . . 54
Table 122: MnSymbol Smiles and Frowns . . . 55
Table 123: ulsy Contradiction Symbols . . . 55
Table 124: Extension Characters . . . 55
Table 125: stmaryrd Extension Characters . . . 55
Table 126: txfonts/pxfonts Extension Characters . . . 55
Table 127: mathabx Extension Characters . . . 56
Table 128: Log-like Symbols . . . 56
Table 129: $\mathcal{AMS}$ Log-like Symbols . . . 56

Table 130: LaTeX 2e Number Sets . . . 56
Table 131: Greek Letters . . . 57
Table 132: $\mathcal{AMS}$ Greek Letters . . . 57
Table 133: txfonts/pxfonts Upright Greek Letters . . . 57
Table 134: upgreek Upright Greek Letters . . . 58
Table 135: fourier Variant Greek Letters . . . 58
Table 136: txfonts/pxfonts Variant Latin Letters . . . 58
Table 137: $\mathcal{AMS}$ Hebrew Letters . . . 58
Table 138: MnSymbol Hebrew Letters . . . 58
Table 139: Letter-like Symbols . . . 59
Table 140: $\mathcal{AMS}$ Letter-like Symbols . . . 59
Table 141: txfonts/pxfonts Letter-like Symbols . . . 59
Table 142: mathabx Letter-like Symbols . . . 59
Table 143: MnSymbol Letter-like Symbols . . . 59
Table 144: trfsigns Letter-like Symbols . . . 59
Table 145: mathdesign Letter-like Symbols . . . 60
Table 146: fge Letter-like Symbols . . . 60
Table 147: fourier Letter-like Symbols . . . 60
Table 148: $\mathcal{AMS}$ Delimiters . . . 60
Table 149: stmaryrd Delimiters . . . 60
Table 150: mathabx Delimiters . . . 60
Table 151: nath Delimiters . . . 60
Table 152: Variable-sized Delimiters . . . 61
Table 153: Large, Variable-sized Delimiters . . . 61
Table 154: $\mathcal{AMS}$ Variable-sized Delimiters . . . 61
Table 155: stmaryrd Variable-sized Delimiters . . . 62
Table 156: mathabx Variable-sized Delimiters . . . 62
Table 157: MnSymbol Variable-sized Delimiters . . . 62
Table 158: mathdesign Variable-sized Delimiters . . . 63
Table 159: nath Variable-sized Delimiters (Double) . . . 64
Table 160: nath Variable-sized Delimiters (Triple) . . . 64
Table 161: fourier Variable-sized Delimiters . . . 64
Table 162: textcomp Text-mode Delimiters . . . 65
Table 163: metre Text-mode Delimiters . . . 65
Table 164: Math-mode Accents . . . 65
Table 165: $\mathcal{AMS}$ Math-mode Accents . . . 65
Table 166: MnSymbol Math-mode Accents . . . 65
Table 167: fge Math-mode Accents . . . 65
Table 168: yhmath Math-mode Accents . . . 66
Table 169: Extensible Accents . . . 66
Table 170: overrightarrow Extensible Accents . . . 66
Table 171: yhmath Extensible Accents . . . 66
Table 172: $\mathcal{AMS}$ Extensible Accents . . . 67
Table 173: MnSymbol Extensible Accents . . . 67
Table 174: mathtools Extensible Accents . . . 67
Table 175: mathabx Extensible Accents . . . 67
Table 176: fourier Extensible Accents . . . 68
Table 177: esvect Extensible Accents . . . 68
Table 178: undertilde Extensible Accents . . . 68
Table 179: ushort Extensible Accents . . . 68
Table 180: $\mathcal{AMS}$ Extensible Arrows . . . 68
Table 181: mathtools Extensible Arrows . . . 69
Table 182: chemarr Extensible Arrows . . . 69
Table 183: chemarrow Extensible Arrows . . . 69

Table 184: extarrows Extensible Arrows . . . 69
Table 185: extpfeil Extensible Arrows . . . 70
Table 186: DotArrow Extensible Arrows . . . 70
Table 187: trfsigns Extensible Transform Symbols . . . 70
Table 188: holtpolt Non-commutative Division Symbols . . . 70
Table 189: Dots . . . 70
Table 190: $\mathcal{A}_{\mathcal{M}}\mathcal{S}$ Dots . . . 71
Table 191: wasysym Dots . . . 71
Table 192: MnSymbol Dots . . . 71
Table 193: mathdots Dots . . . 71
Table 194: yhmath Dots . . . 71
Table 195: teubner Dots . . . 72
Table 196: mathcomp Math Symbols . . . 72
Table 197: marvosym Digits . . . 72
Table 198: fge Digits . . . 72
Table 199: dozenal Base-12 Digits . . . 72
Table 200: mathabx Mayan Digits . . . 72
Table 201: Miscellaneous LaTeX 2_{ε} Math Symbols . . . 73
Table 202: Miscellaneous $\mathcal{A}_{\mathcal{M}}\mathcal{S}$ Math Symbols . . . 73
Table 203: Miscellaneous wasysym Math Symbols . . . 73
Table 204: Miscellaneous txfonts/pxfonts Math Symbols . . . 73
Table 205: Miscellaneous mathabx Math Symbols . . . 73
Table 206: Miscellaneous MnSymbol Math Symbols . . . 74
Table 207: Miscellaneous Internal MnSymbol Math Symbols . . . 74
Table 208: Miscellaneous textcomp Text-mode Math Symbols . . . 74
Table 209: Miscellaneous marvosym Math Symbols . . . 74
Table 210: Miscellaneous fge Math Symbols . . . 75
Table 211: Miscellaneous mathdesign Math Symbols . . . 75
Table 212: Miscellaneous arev Math Symbols . . . 75
Table 213: Math Alphabets . . . 76

4 Science and technology symbols 78
Table 214: gensymb Symbols Defined to Work in Both Math and Text Mode . . . 78
Table 215: wasysym Electrical and Physical Symbols . . . 78
Table 216: ifsym Pulse Diagram Symbols . . . 78
Table 217: ar Aspect Ratio Symbol . . . 78
Table 218: textcomp Text-mode Science and Engineering Symbols . . . 78
Table 219: steinmetz Extensible Phasor Symbol . . . 79
Table 220: wasysym Astronomical Symbols . . . 79
Table 221: marvosym Astronomical Symbols . . . 79
Table 222: mathabx Astronomical Symbols . . . 79
Table 223: wasysym APL Symbols . . . 80
Table 224: wasysym APL Modifiers . . . 80
Table 225: marvosym Computer Hardware Symbols . . . 80
Table 226: keystroke Computer Keys . . . 80
Table 227: ascii Control Characters (CP437) . . . 81
Table 228: milstd Logic Gates . . . 81
Table 229: marvosym Communication Symbols . . . 82
Table 230: marvosym Engineering Symbols . . . 82
Table 231: wasysym Biological Symbols . . . 82
Table 232: marvosym Biological Symbols . . . 82
Table 233: marvosym Safety-related Symbols . . . 82
Table 234: feyn Feynman Diagram Symbols . . . 83

5 Dingbats **84**
Table 235: bbding Arrows . . . 84
Table 236: pifont Arrows . . . 84
Table 237: universal Arrows . . . 84
Table 238: marvosym Scissors . . . 84
Table 239: bbding Scissors . . . 84
Table 240: pifont Scissors . . . 85
Table 241: dingbat Pencils . . . 85
Table 242: bbding Pencils and Nibs . . . 85
Table 243: pifont Pencils and Nibs . . . 85
Table 244: dingbat Fists . . . 85
Table 245: bbding Fists . . . 85
Table 246: pifont Fists . . . 85
Table 247: fourier Fists . . . 85
Table 248: bbding Crosses and Plusses . . . 86
Table 249: pifont Crosses and Plusses . . . 86
Table 250: bbding Xs and Check Marks . . . 86
Table 251: pifont Xs and Check Marks . . . 86
Table 252: wasysym Xs and Check Marks . . . 86
Table 253: universal Xs . . . 86
Table 254: pifont Circled Numbers . . . 87
Table 255: wasysym Stars . . . 87
Table 256: bbding Stars, Flowers, and Similar Shapes . . . 87
Table 257: pifont Stars, Flowers, and Similar Shapes . . . 88
Table 258: fourier Ornaments . . . 88
Table 259: wasysym Geometric Shapes . . . 88
Table 260: MnSymbol Geometric Shapes . . . 88
Table 261: ifsym Geometric Shapes . . . 89
Table 262: bbding Geometric Shapes . . . 89
Table 263: pifont Geometric Shapes . . . 90
Table 264: universa Geometric Shapes . . . 90
Table 265: universal Geometric Shapes . . . 90
Table 266: Miscellaneous dingbat Dingbats . . . 90
Table 267: Miscellaneous bbding Dingbats . . . 90
Table 268: Miscellaneous pifont Dingbats . . . 90

6 Ancient languages **91**
Table 269: phaistos Symbols from the Phaistos Disk . . . 91
Table 270: protosem Proto-Semitic Characters . . . 91
Table 271: hieroglf Hieroglyphics . . . 92
Table 272: linearA Linear A Script . . . 92
Table 273: linearb Linear B Basic and Optional Letters . . . 95
Table 274: linearb Linear B Numerals . . . 95
Table 275: linearb Linear B Weights and Measures . . . 95
Table 276: linearb Linear B Ideograms . . . 96
Table 277: linearb Unidentified Linear B Symbols . . . 96
Table 278: cypriot Cypriot Letters . . . 96
Table 279: sarabian South Arabian Letters . . . 97
Table 280: teubner Archaic Greek Letters and Greek Numerals . . . 97

7 Other symbols **98**
Table 281: textcomp Genealogical Symbols . . . 98
Table 282: wasysym General Symbols . . . 98
Table 283: wasysym Circles . . . 98
Table 284: wasysym Musical Symbols . . . 98
Table 285: arev Musical Symbols . . . 98
Table 286: harmony Musical Symbols . . . 99
Table 287: harmony Musical Accents . . . 99
Table 288: manfnt Dangerous Bend Symbols . . . 99
Table 289: Miscellaneous manfnt Symbols . . . 100
Table 290: marvosym Navigation Symbols . . . 100
Table 291: marvosym Laundry Symbols . . . 100
Table 292: marvosym Information Symbols . . . 100
Table 293: Other marvosym Symbols . . . 101
Table 294: Miscellaneous universa Symbols . . . 101
Table 295: Miscellaneous universal Symbols . . . 101
Table 296: Miscellaneous fourier Symbols . . . 101
Table 297: ifsym Weather Symbols . . . 101
Table 298: ifsym Alpine Symbols . . . 102
Table 299: ifsym Clocks . . . 102
Table 300: Other ifsym Symbols . . . 102
Table 301: clock Clocks . . . 102
Table 302: epsdice Dice . . . 103
Table 303: hhcount Dice . . . 103
Table 304: hhcount Tally Markers . . . 103
Table 305: skull Symbols . . . 103
Table 306: Non-Mathematical mathabx Symbols . . . 103
Table 307: skak Chess Informator Symbols . . . 104
Table 308: skak Chess Pieces and Chessboard Squares . . . 104
Table 309: igo Go Stones . . . 105
Table 310: metre Metrical Symbols . . . 105
Table 311: metre Small and Large Metrical Symbols . . . 105
Table 312: teubner Metrical Symbols . . . 106
Table 313: dictsym Dictionary Symbols . . . 106
Table 314: simpsons Characters from *The Simpsons* . . . 106
Table 315: pmboxdraw Box-Drawing Symbols . . . 107
Table 316: staves Magical Staves . . . 107
Table 317: pigpen Cipher Symbols . . . 108
Table 318: LaTeX2e Phases of the Moon . . . 108
Table 319: Other LaTeX2e Symbols . . . 109
Table 320: recycle Recycling Symbols . . . 109

8 Additional Information **110**
8.1 Symbol Name Clashes . . . 110
8.2 Resizing symbols . . . 110
8.3 Where can I find the symbol for . . . ? . . . 113
8.4 Math-mode spacing . . . 123
8.5 Bold mathematical symbols . . . 123
8.6 ASCII and Latin 1 quick reference . . . 124
8.7 Unicode characters . . . 126
8.8 About this document . . . 129
8.9 Copyright and license . . . 132

References **133**

Index **134**

1 Introduction

Welcome to the Comprehensive LaTeX Symbol List! This document strives to be your primary source of LaTeX symbol information: font samples, LaTeX commands, packages, usage details, caveats—everything needed to put thousands of different symbols at your disposal. All of the fonts covered herein meet the following criteria:

1. They are freely available from the Comprehensive TeX Archive Network (`http://www.ctan.org`).
2. All of their symbols have LaTeX 2$_\varepsilon$ bindings. That is, a user should be able to access a symbol by name, not just by `\char`⟨*number*⟩.

These are not particularly limiting criteria; the Comprehensive LaTeX Symbol List contains samples of 5913 symbols—quite a large number. Some of these symbols are guaranteed to be available in every LaTeX 2$_\varepsilon$ system; others require fonts and packages that may not accompany a given distribution and that therefore need to be installed. See `http://www.tex.ac.uk/cgi-bin/texfaq2html?label=instpackages+wherefiles` for help with installing new fonts and packages.

1.1 Document Usage

Each section of this document contains a number of font tables. Each table shows a set of symbols, with the corresponding LaTeX command to the right of each symbol. A table's caption indicates what package needs to be loaded in order to access that table's symbols. For example, the symbols in Table 39, "textcomp Old-Style Numerals", are made available by putting "`\usepackage{textcomp}`" in your document's preamble. "$\mathcal{AMS}$" means to use the $\mathcal{AMS}$ packages, viz. amssymb and/or amsmath. Notes below a table provide additional information about some or all the symbols in that table.

One note that appears a few times in this document, particularly in Section 2, indicates that certain symbols do not exist in the OT1 font encoding (Donald Knuth's original, 7-bit font encoding, which is the default font encoding for LaTeX) and that you should use fontenc to select a different encoding, such as T1 (a common 8-bit font encoding). That means that you should put "`\usepackage[`⟨*encoding*⟩`]{fontenc}`" in your document's preamble, where ⟨*encoding*⟩ is, e.g., `T1` or `LY1`. To limit the change in font encoding to the current group, use "`\fontencoding{`⟨*encoding*⟩`}\selectfont`".

Section 8 contains some additional information about the symbols in this document. It discusses how certain mathematical symbols can vary in height, shows which symbol names are not unique across packages, gives examples of how to create new symbols out of existing symbols, explains how symbols are spaced in math mode, compares various schemes for boldfacing symbols, presents LaTeX ASCII and Latin 1 tables, shows how to input and output Unicode characters, and provides some information about this document itself. The Comprehensive LaTeX Symbol List ends with an index of all the symbols in the document and various additional useful terms.

1.2 Frequently Requested Symbols

There are a number of symbols that are requested over and over again on `comp.text.tex`. If you're looking for such a symbol the following list will help you find it quickly.

␣, as in "Spaces␣are␣significant." 10
í, ì, ī, î, etc. (versus í, ì, $\bar{\imath}$, and î) 16
¢ 20
€ 20
©, ®, and ™ 21
‰ 22
$\nexists$ 31
∴ 34
≔ and ⩴ 35
$\lesssim$ and $\gtrsim$ 43
$\ddots$ 71
°, as in "180°" or "15°C" 74
$\mathscr{L}$, $\mathscr{F}$, etc. 76
$\mathbb{N}$, $\mathbb{Z}$, $\mathbb{R}$, etc. 76
$\imath$ 76
$\jmath$ 116
á, è, etc. (i.e., several accents per character) 118
<, >, and | (instead of ¡, ¿, and —) 124
ˆ and ˜ (or ∼) 125

2 Body-text symbols

This section lists symbols that are intended for use in running text, such as punctuation marks, accents, ligatures, and currency symbols.

TABLE 1: LaTeX 2ε Escapable "Special" Characters

$	\$	%	\%	_	_*	}	\}	&	\&	#	\#	{	\{

* The underscore package redefines "_" to produce an underscore in text mode (i.e., it makes it unnecessary to escape the underscore character).

TABLE 2: Predefined LaTeX 2ε Text-mode Commands

	ˆ	\textasciicircum*		<	\textless
	~	\textasciitilde*	a	a	\textordfeminine
	*	\textasteriskcentered	o	o	\textordmasculine
	\	\textbackslash		¶	\textparagraph†
	|	\textbar		·	\textperiodcentered
	{	\textbraceleft†		¿	\textquestiondown
	}	\textbraceright†		“	\textquotedblleft
	•	\textbullet		”	\textquotedblright
©	©	\textcopyright†		‘	\textquoteleft
	†	\textdagger†		’	\textquoteright
	‡	\textdaggerdbl†	®	®	\textregistered
	$	\textdollar†		§	\textsection†
	...	\textellipsis†		£	\textsterling†
	—	\textemdash	TM	™	\texttrademark
	–	\textendash		_	\textunderscore†
	¡	\textexclamdown		␣	\textvisiblespace
	>	\textgreater			

Where two symbols are present, the left one is the "faked" symbol that LaTeX 2ε provides by default, and the right one is the "true" symbol that textcomp makes available.

* \^{} and \~{} can be used instead of \textasciicircum and \textasciitilde. See the discussion of "~" on page 125.

† It's generally preferable to use the corresponding symbol from Table 3 because the symbols in that table work properly in both text mode and math mode.

TABLE 3: LaTeX 2ε Commands Defined to Work in Both Math and Text Mode

$	\$		_	_	‡	\ddag	{	\{
¶	\P	©	©	\copyright	...	\dots	}	\}
§	\S		†	\dag	£	\pounds		

Where two symbols are present, the left one is the "faked" symbol that LaTeX 2ε provides by default, and the right one is the "true" symbol that textcomp makes available.

Table 4: $\mathcal{AMS}$ Commands Defined to Work in Both Math and Text Mode

✓	\checkmark	®	\circledR	✠	\maltese

Table 5: Non-ASCII Letters (Excluding Accented Letters)

å	\aa	Ð	\DH*	Ł	\L	ø	\o	ß	\ss
Å	\AA	ð	\dh*	ł	\l	Ø	\O	SS	\SS
Æ	\AE	Đ	\DJ*	Ŋ	\NG*	Œ	\OE	Þ	\TH*
æ	\ae	đ	\dj*	ŋ	\ng*	œ	\oe	þ	\th*

* Not available in the OT1 font encoding. Use the fontenc package to select an alternate font encoding, such as T1.

Table 6: Letters Used to Typeset African Languages

Ð	\B{D}	ƈ	\m{c}	ƒ	\m{f}	ƙ	\m{k}	ţ	\M{t}	ȝ	\m{Z}
đ	\B{d}	Ɗ	\m{D}	Ƒ	\m{F}	Ɲ	\m{N}	Ţ	\M{T}	Ɛ̃	\T{E}
Ħ	\B{H}	ɖ	\M{d}	Ɣ	\m{G}	ŋ	\m{n}	ƭ	\m{t}	ɛ̃	\T{e}
ħ	\B{h}	Đ	\M{D}	ɣ	\m{g}	ɔ	\m{o}	Ʈ	\m{T}	Ɔ̃	\T{O}
ŧ	\B{t}	ƌ	\m{d}	Ɩ	\m{I}	Ɔ	\M{O}	ʊ	\m{u}*	ɔ̃	\T{o}
Ŧ	\B{T}	Ɛ	\m{E}	ɩ	\m{i}	Ƥ	\m{P}	Ʊ	\m{U}*		
ɓ	\m{b}	ɛ	\m{e}	Ɲ	\m{J}	ƥ	\m{p}	Ƴ	\m{Y}		
Ɓ	\m{B}	Ǝ	\M{E}	ɲ	\m{j}	ʃ	\m{s}	ƴ	\m{y}		
Ƈ	\m{C}	ə	\M{e}	Ƙ	\m{K}	Ʃ	\m{S}	ʒ	\m{z}		

These characters all need the T4 font encoding, which is provided by the fc package.

* \m{v} and \m{V} are synonyms for \m{u} and \m{U}.

Table 7: Letters Used to Typeset Vietnamese

Ơ	\OHORN	ơ	\ohorn	Ư	\UHORN	ư	\uhorn

These characters all need the T5 font encoding, which is provided by the vntex package.

Table 8: Punctuation Marks Not Found in OT1

«	\guillemotleft	‹	\guilsinglleft	„	\quotedblbase	"	\textquotedbl
»	\guillemotright	›	\guilsinglright	‚	\quotesinglbase		

To get these symbols, use the fontenc package to select an alternate font encoding, such as T1.

Table 9: pifont Decorative Punctuation Marks

❛	\ding{123}	❝	\ding{125}	❡	\ding{161}	❣	\ding{163}
❜	\ding{124}	❞	\ding{126}	❢	\ding{162}		

Table 10: tipa Phonetic Symbols

ɤ	\textbabygamma	ʔ	\textglotstop	ɳ	\textrtailn
ƀ	\textbarb	ˑ	\texthalflength	ɽ	\textrtailr
ȼ	\textbarc	ъ	\texthardsign	ʂ	\textrtails
đ	\textbard	ɦ	\texthooktop	ʈ	\textrtailt
ɟ	\textbardotlessj	ɓ	\texthtb	ʐ	\textrtailz
ǥ	\textbarg	ƒ	\texthtbardotlessj	ʻ	\textrthook
ʔ	\textbarglotstop	ƈ	\texthtc	ʌ	\textsca
ɨ	\textbari	ɗ	\texthtd	ʙ	\textscb
ɬ	\textbarl	ɠ	\texthtg	ɛ	\textsce
ɵ	\textbaro	ɦ	\texthth	ɢ	\textscg
ʕ	\textbarrevglotstop	ʄ	\texththeng	ʜ	\textsch
ʉ	\textbaru	ƙ	\texthtk	ə	\textschwa
ɬ	\textbeltl	ƥ	\texthtp	ɪ	\textsci
β	\textbeta	ʠ	\texthtq	ʝ	\textscj
ʘ	\textbullseye	ԁ	\texthtrtaild	ʟ	\textscl
ˊ	\textceltpal	ƭ	\texthtscg	ɴ	\textscn
	\textchi	ʈ	\texthtt	œ	\textscoelig
ɔ	\textcloseepsilon	ʰ	\texthvlig	ɷ	\textscomega
ɷ	\textcloseomega	ƪ	\textinvglotstop	ʁ	\textscr
ɞ	\textcloserevepsilon	ʁ	\textinvscr	ɑ	\textscripta
ʒ	\textcommatailz	ɩ	\textiota	ɡ	\textscriptg
˩	\textcorner	ʎ	\textlambda	ʊ	\textscriptv
ƀ	\textcrb	ː	\textlengthmark	ᴜ	\textscu
đ	\textcrd	ɬ	\textlhookt	ʏ	\textscy
ǥ	\textcrg	ɭ	\textlhtlongi	ˌ	\textsecstress
ħ	\textcrh	ʯ	\textlhtlongy	ъ	\textsoftsign
ƪ	\textcrinvglotstop	ɾ	\textlonglegr	ʗ	\textstretchc
ƛ	\textcrlambda	˂	\textlptr	ʦ	\texttctclig
ƻ	\textcrtwo	ɱ	\textltailm	ʧ	\textteshlig
ȼ	\textctc	ɲ	\textltailn	θ	\texttheta
ɖ	\textctd	ɬ	\textltilde	þ	\textthorn
ʣ	\textctdctzlig	ɮ	\textlyoghlig	ǀ	\texttoneletterstem
ʃ	\textctesh	ʝ	\textObardotlessj	ʦ	\texttslig
j	\textctj	ɮ	\textOlyoghlig	ɐ	\textturna
ɳ	\textctn	ω	\textomega	œ	\textturncelig
ʇ	\textctt	ˠ	\textopencorner	ɥ	\textturnh
ʧ	\textcttctclig	ɔ	\textopeno	ʞ	\textturnk
ʒ	\textctyogh	ˌ	\textpalhook	⅃	\textturnlonglegr

(continued on next page)

(continued from previous page)

ʑ	\textctz	ɸ	\textphi	ɯ	\textturnm
ʥ	\textdctzlig	|	\textpipe	ɯ	\textturnmrleg
ǯ	\textdoublebaresh	ˈ	\textprimstress	ɹ	\textturnr
ǂ	\textdoublebarpipe	ʔ	\textraiseglotstop	ɻ	\textturnrrtail
≠	\textdoublebarslash	ʅ	\textraisevibyi	ɒ	\textturnscripta
‖	\textdoublepipe	ɤ	\textramshorns	ʇ	\textturnt
‖	\textdoublevertline	ʿ	\textrevapostrophe	ʌ	\textturnv
↓	\textdownstep	ɘ	\textreve	ʍ	\textturnw
ʤ	\textdyoghlig	ɜ	\textrevepsilon	ʎ	\textturny
ʣ	\textdzlig	ʕ	\textrevglotstop	ʊ	\textupsilon
ɛ	\textepsilon	ʒ	\textrevyogh	↑	\textupstep
ʃ	\textesh	ɜ˞	\textrhookrevepsilon	|	\textvertline
ɾ	\textfishhookr	ɚ	\textrhookschwa	ʅ	\textvibyi
g	\textg	˷	\textrhoticity	ʯ	\textvibyy
ɣ	\textgamma	˃	\textrptr	þ	\textwynn
↘	\textglobfall	ɖ	\textrtaild	ʒ	\textyogh
↗	\textglobrise	ɭ	\textrtaill		

tipa defines shortcut characters for many of the above. It also defines a command \tone for denoting tone letters (pitches). See the tipa documentation for more information.

TABLE 11: tipx Phonetic Symbols

æ	\textaolig	ʃ	\texthtbardotlessjvar	˞	\textrthooklong
ʒ	\textbenttailyogh	ω	\textinvomega	ɐ	\textscaolig
ɣ	\textbktailgamma	ʌ	\textinvsca	ᴀ	\textscdelta
ʖ	\textctinvglotstop	ɑ	\textinvscripta	ꜰ	\textscf
ʝ	\textctjvar	ɬ	\textlfishhookrlig	ᴋ	\textsck
ʗ	\textctstretchc	ɟ	\textlhookfour	ᴍ	\textscm
ɕ	\textctstretchcvar	ɲ	\textlhookp	ᴘ	\textscp
ʯ	\textctturnt	ɪ	\textlhti	ǫ	\textscq
ɗ	\textdblig	ɺ	\textlooptoprevesh	←	\textspleftarrow
ǂ	\textdoublebarpipevar	ŋ	\textnrleg	ɕ	\textstretchcvar
‖	\textdoublepipevar	☉	\textObullseye	↔	\textsubdoublearrow
↓	\textdownfullarrow	˩	\textpalhooklong	→	\textsubrightarrow
♀	\textfemale	ʲ	\textpalhookvar	þ	\textthornvari
ɲ	\textfrbarn	|	\textpipevar	þ	\textthornvarii
ɗ	\textfrhookd	ɋ	\textqplig	þ	\textthornvariii
ɗ	\textfrhookdvar	▫	\textrectangle	þ	\textthornvariv
ʇ	\textfrhookt	↫	\textretractingvar	ʔ	\textturnglotstop
ɣ	\textfrtailgamma	ɹ	\textrevscl	ʞ	\textturnsck
ʔ	\textglotstopvari	ʁ	\textrevscr	∩	\textturnscu

(continued on next page)

(continued from previous page)

ʔ	\textglotstopvarii	ɐ̡	\textrhooka	ɛ	\textturnthree
ʔ	\textglotstopvariii	e̡	\textrhooke	ɾ	\textturntwo
ɣ	\textgrgamma	ɛ̡	\textrhookepsilon	♀	\textuncrfemale
ɧ	\textheng	o̡	\textrhookopeno	↑	\textupfullarrow
h	\texthmlig	ɳ̡	\textrtailhth		

Table 12: wsuipa Phonetic Symbols

ɤ	\babygamma	ŋ	\eng	ɱ	\labdentalnas	ə	\schwa
ƀ	\barb	ɔˠ	\er	ɬ	\latfric	ɪ	\sci
đ	\bard	ʃ	\esh	ɯ̩	\legm	ɴ	\scn
ɨ	\bari	ð	\eth	ɾ̩	\legr	ʀ	\scr
ɬ	\barl	ɾ	\flapr	ɮ	\lz	ɑ	\scripta
ɵ	\baro	ʔ	\glotstop	ɑ	\nialpha	ɡ	\scriptg
ꝑ	\barp	ɓ	\hookb	β	\nibeta	ʊ	\scriptv
ɨ	\barsci	ɗ	\hookd	χ	\nichi	ᴜ	\scu
ʉ	\barscu	ɠ	\hookg	ɛ	\niepsilon	ʏ	\scy
ʉ	\baru	ɦ	\hookh	ɣ	\nigamma	ⱱ̸	\slashb
ʘ	\clickb	ʄ	\hookheng	ɩ	\niiota	ɕ	\slashc
ǀ	\clickc	ɜˠ	\hookrevepsilon	ƛ	\nilambda	ɖ̸	\slashd
ǂ	\clickt	ʰv	\hv	ω	\niomega	ʉ̸	\slashu
ɷ	\closedniomega	ɐ	\inva	ɸ	\niphi	ᶑ	\taild
ɞ	\closedrevepsilon	ɟ	\invf	σ	\nisigma	ɻ̩	\tailinvr
ƀ	\crossb	ɓ	\invglotstop	θ	\nitheta	ɭ	\taill
đ	\crossd	ɥ	\invh	ʊ	\niupsilon	ɳ̩	\tailn
ħ	\crossh	ɺ	\invlegr	ɲ	\nj	ɽ	\tailr
ƛ	\crossnilambda	ɯ	\invm	œ	\oo	ʂ	\tails
ɕ	\curlyc	ɹ	\invr	ɔ	\openo	ʈ	\tailt
ʃ̬	\curlyesh	ʁ	\invscr	ɘ	\reve	ʐ̩	\tailz
ʒ̬	\curlyyogh	ɒ	\invscripta	ʕ	\reveject	ʧ	\tesh
ʑ	\curlyz	ʌ	\invv	ɜ	\revepsilon	þ	\thorn
ɨ	\dlbari	ʍ	\invw	ʕ	\revglotstop	ƭ	\tildel
ʤ	\dz	ʎ	\invy	ᴅ	\scd	ʒ	\yogh
ʔ	\ejective	ɣ	\ipagamma	ɢ	\scg		

Table 13: wasysym Phonetic Symbols

Ð	\DH	ð	\dh	ɔ	\openo
Þ	\Thorn	ə	\inve	þ	\thorn

TABLE 14: phonetic Phonetic Symbols

ɟ	\barj	ɾ	\flap	ɨ	\ibar	ɒ	\rotvara	ɪ	\vari
ƛ	\barlambda	ʔ	\glottal	ɔ	\openo	ʍ	\rotw	ω	\varomega
ɱ	\emgma	Ɓ	\hausaB	ħ	\planck	ʎ	\roty	ɔ	\varopeno
ŋ	\engma	ɓ	\hausab	ʌ	\pwedge	ə	\schwa	ʏ	\vod
ɲ	\enya	ɗ	\hausad	Ɑ	\revD	þ	\thorn	ɦ	\voicedh
ɛ	\epsi	Ɗ	\hausaD	ɹ	\riota	ʉ	\ubar	ʒ	\yogh
ʃ	\esh	ƙ	\hausak	ɯ	\rotm	ụ	\udesc		
ð	\eth	Ƙ	\hausaK	ʊ	\rotOmega	ɑ	\vara		
ʄ	\fj	ɗ	\hookd	ɻ	\rotr	ɡ	\varg		

TABLE 15: t4phonet Phonetic Symbols

đ	\textcrd	ɗ	\texthtd	|	\textpipe
ħ	\textcrh	ƙ	\texthtk	ɖ	\textrtaild
ɛ	\textepsilon	ƥ	\texthtp	ʈ	\textrtailt
ʃ	\textesh	ƭ	\texthtt	ʅ	\textschwa
ʄ	\textfjlig	ɪ	\textiota	ʃ	\textscriptv
ɓ	\texthtb	ɲ	\textltailn	ʧ	\textteshlig
ƈ	\texthtc	ɔ	\textopeno	ʒ	\textyogh

The idea behind the t4phonet package's phonetic symbols is to provide an interface to some of the characters in the T4 font encoding (Table 6 on page 11) but using the same names as the tipa characters presented in Table 10 on page 12.

TABLE 16: semtrans Transliteration Symbols

ʾ	\Alif	ʿ	\Ayn

Table 17: Text-mode Accents

Ää	`\"{A}\"{a}`	Àà	`\‘{A}\‘{a}`	Ạạ	`\d{A}\d{a}`	Åå	`\r{A}\r{a}`
Áá	`\’{A}\’{a}`	Ȧȧ	`|{A}|{a}`‡	Ä̲ä̲	`\G{A}\G{a}`‡	A͡a͡	`\t{A}\t{a}`
Ȧȧ	`\.{A}\.{a}`	Ãã	`\~{A}\~{a}`	Å̲å̲	`\h{A}\h{a}`§	Ăă	`\u{A}\u{a}`
Āā	`\={A}\={a}`	A̲a̲	`\b{A}\b{a}`	Ő̲ő̲	`\H{A}\H{a}`	Ä̆ä̆	`\U{A}\U{a}`‡
Ââ	`\^{A}\^{a}`	Ąą	`\c{A}\c{a}`	Ą̇ą̇	`\k{A}\k{a}`†	Ǎǎ	`\v{A}\v{a}`

Ân̂ `\newtie{A}\newtie{a}`* Ⓐⓐ `\textcircled{A}\textcircled{a}`

* Requires the textcomp package.

† Not available in the OT1 font encoding. Use the fontenc package to select an alternate font encoding, such as T1.

‡ Requires the T4 font encoding, provided by the fc package.

§ Requires the T5 font encoding, provided by the vntex package.

Also note the existence of `\i` and `\j`, which produce dotless versions of “i” and “j” (viz., “ı” and “ȷ”). These are useful when the accent is supposed to replace the dot in encodings that need to composite (i.e., combine) letters and accents. For example, “`na\"{\i}ve`” always produces a correct “naïve”, while “`na\"{i}ve`” yields the rather odd-looking “naïve” when using the OT1 font encoding and older versions of LaTeX. Font encodings other than OT1 and newer versions of LaTeX properly typeset “`na\"{i}ve`” as “naïve”.

Table 18: tipa Text-mode Accents

Á̠á̠	`\textacutemacron{A}\textacutemacron{a}`
Á̌á̌	`\textacutewedge{A}\textacutewedge{a}`
Ą̈ą̈	`\textadvancing{A}\textadvancing{a}`
A͡a͡	`\textbottomtiebar{A}\textbottomtiebar{a}`
Ă̲ă̲	`\textbrevemacron{A}\textbrevemacron{a}`
Ãã	`\textcircumacute{A}\textcircumacute{a}`
Âå	`\textcircumdot{A}\textcircumdot{a}`
Ǎǎ	`\textdotacute{A}\textdotacute{a}`
Å̆å̆	`\textdotbreve{A}\textdotbreve{a}`
Ä̏ä̏	`\textdoublegrave{A}\textdoublegrave{a}`
Ä̋ä̋	`\textdoublevbaraccent{A}\textdoublevbaraccent{a}`
Âa̋	`\textgravecircum{A}\textgravecircum{a}`
Ä̀ä̀	`\textgravedot{A}\textgravedot{a}`
Ā̀ā̀	`\textgravemacron{A}\textgravemacron{a}`

(continued on next page)

(continued from previous page)

Àà	`\textgravemid{A}\textgravemid{a}`
A̻a̻	`\textinvsubbridge{A}\textinvsubbridge{a}`
Ạạ	`\textlowering{A}\textlowering{a}`
Áá	`\textmidacute{A}\textmidacute{a}`
Ǎǎ	`\textovercross{A}\textovercross{a}`
Ää	`\textoverw{A}\textoverw{a}`
Ąą	`\textpolhook{A}\textpolhook{a}`
A̝a̝	`\textraising{A}\textraising{a}`
A̞a̞	`\textretracting{A}\textretracting{a}`
Ā̤ā̤	`\textringmacron{A}\textringmacron{a}`
Ââ	`\textroundcap{A}\textroundcap{a}`
A̼a̼	`\textseagull{A}\textseagull{a}`
A̗a̗	`\textsubacute{A}\textsubacute{a}`
A̯a̯	`\textsubarch{A}\textsubarch{a}`
A̲a̲	`\textsubbar{A}\textsubbar{a}`
A̪a̪	`\textsubbridge{A}\textsubbridge{a}`
A̭a̭	`\textsubcircum{A}\textsubcircum{a}`
Ạạ	`\textsubdot{A}\textsubdot{a}`
A̗a̗	`\textsubgrave{A}\textsubgrave{a}`
A̬a̬	`\textsublhalfring{A}\textsublhalfring{a}`
A̟a̟	`\textsubplus{A}\textsubplus{a}`
A̩a̩	`\textsubrhalfring{A}\textsubrhalfring{a}`
Ḁḁ	`\textsubring{A}\textsubring{a}`
A̹a̹	`\textsubsquare{A}\textsubsquare{a}`
A̰a̰	`\textsubtilde{A}\textsubtilde{a}`
A̤a̤	`\textsubumlaut{A}\textsubumlaut{a}`
A̳a̳	`\textsubw{A}\textsubw{a}`
A̯a̯	`\textsubwedge{A}\textsubwedge{a}`
~~Aa~~	`\textsuperimposetilde{A}\textsuperimposetilde{a}`
Ạạ	`\textsyllabic{A}\textsyllabic{a}`
Ãã	`\texttildedot{A}\texttildedot{a}`
A͡a͡	`\texttoptiebar{A}\texttoptiebar{a}`
Ȧȧ	`\textvbaraccent{A}\textvbaraccent{a}`

tipa defines shortcut sequences for many of the above. See the tipa documentation for more information.

TABLE 19: extraipa Text-mode Accents

A̰a̰	\bibridge{A}\bibridge{a}
Áá	\crtilde{A}\crtilde{a}
Ã̤ã̤	\dottedtilde{A}\dottedtilde{a}
Ã̰ã̰	\doubletilde{A}\doubletilde{a}
A͡a͡	\finpartvoice{A}\finpartvoice{a}
A͜a͜	\finpartvoiceless{A}\finpartvoiceless{a}
A͡a	\inipartvoice{A}\inipartvoice{a}
A͜a	\inipartvoiceless{A}\inipartvoiceless{a}
A̰a̰	\overbridge{A}\overbridge{a}
A͡a͡	\partvoice{A}\partvoice{a}
A͜a͜	\partvoiceless{A}\partvoiceless{a}
A⃗a⃗	\sliding{A}\sliding{a}
A⃡a⃡	\spreadlips{A}\spreadlips{a}
A̗a̗	\subcorner{A}\subcorner{a}
A̳a̳	\subdoublebar{A}\subdoublebar{a}
A̺a̺	\subdoublevert{A}\subdoublevert{a}
A̹a̹	\sublptr{A}\sublptr{a}
A̻a̻	\subrptr{A}\subrptr{a}
A̝a̝	\whistle{A}\whistle{a}

TABLE 20: wsuipa Text-mode Accents

A̪a̪	\dental{A}\dental{a}
A̠a̠	\underarch{A}\underarch{a}

TABLE 21: phonetic Text-mode Accents

A̮a̮	\hill{A}\hill{a}	A̭a̭	\rc{A}\rc{a}	A̬a̬	\ut{A}\ut{a}
A̯a̯	\od{A}\od{a}	A̩a̩	\syl{A}\syl{a}		
Å̯å̯	\ohill{A}\ohill{a}	A̤a̤	\td{A}\td{a}		

The phonetic package provides a few additional macros for linguistic accents. `\acbar` and `\acarc` compose characters with multiple accents; for example, `\acbar{\'}{a}` produces "á" and `\acarc{\"}{e}` produces "e̋". `\labvel` joins two characters with an arc: `\labvel{mn}` → "m͡n". `\upbar` is intended to go between characters as in "`x\upbar{}y''` → "x|y". Lastly, `\uplett` behaves like `\textsuperscript` but uses a smaller font. Contrast "`p\uplett{h}''` → "pʰ" with "`p\textsuperscript{h}''` → "p^{h}".

TABLE 22: metre Text-mode Accents

Áá	\acutus{A}\acutus{a}
Ăă	\breve{A}\breve{a}
Ãã	\circumflexus{A}\circumflexus{a}
Ää	\diaeresis{A}\diaeresis{a}
Àà	\gravis{A}\gravis{a}
Āā	\macron{A}\macron{a}

TABLE 23: t4phonet Text-mode Accents

Ä̏ä̏	`\textdoublegrave{A}\textdoublegrave{a}`
Ȧ̀ȧ̀	`\textvbaraccent{A}\textvbaraccent{a}`
Ä̀ä̀	`\textdoublevbaraccent{A}\textdoublevbaraccent{a}`

The idea behind the t4phonet package's text-mode accents is to provide an interface to some of the accents in the T4 font encoding (accents marked with "‡" in Table 17 on page 16) but using the same names as the tipa accents presented in Table 18 on page 16.

TABLE 24: arcs Text-mode Accents

A͡a͡	`\overarc{A}\overarc{a}`	A͜a͜	`\underarc{A}\underarc{a}`

The accents shown above scale only to a few characters wide. An optional macro argument alters the effective width of the accented characters. See the arcs documentation for more information.

TABLE 25: semtrans Accents

A̤a̤	`\D{A}\D{a}`	A̬a̬	`\U{A}\U{a}`

Vɐ	`\T{A}\T{a}`*

`\T` is not actually an accent but a command that rotates its argument 180° using the graphicx package's `\rotatebox` command.

TABLE 26: ogonek Accents

Ąą	`\k{A}\k{a}`

TABLE 27: combelow Accents

A̦a̦	`\cb{A}\cb{a}`

`\cb` places a comma *above* letters with descenders. Hence, while "`\cb{s}`" produces "ș", "`\cb{g}`" produces "ġ".

Table 28: wsuipa Diacritics

ʿ	\ain	˂	\leftp	˚	\overring	ˈ	\stress	ˬ	\underwedge
˥	\corner	˧	\leftt	˛	\polishhook	ˌ	\syllabic	˄	\upp
˅	\downp	ː	\length	˃	\rightp	¨	\underdots	˩	\upt
˧	\downt	~	\midtilde	˦	\rightt	˚	\underring		
ˑ	\halflength	˷	\open	ˈ	\secstress	~	\undertilde		

The wsuipa package defines all of the above as ordinary characters, not as accents. However, it does provide \diatop and \diaunder commands, which are used to compose diacritics with other characters. For example, \diatop[\overring|a] produces "å", and \diaunder[\underdots|a] produces "a̤". See the wsuipa documentation for more information.

Table 29: textcomp Diacritics

˝	\textacutedbl	ˇ	\textasciicaron	¯	\textasciimacron
´	\textasciiacute	¨	\textasciidieresis	‟	\textgravedbl
˘	\textasciibreve	`	\textasciigrave		

The textcomp package defines all of the above as ordinary characters, not as accents.

Table 30: textcomp Currency Symbols

฿	\textbaht	$	\textdollar*	₲	\textguarani	₩	\textwon
¢	\textcent	$	\textdollaroldstyle	£	\textlira	¥	\textyen
¢	\textcentoldstyle	đ	\textdong	₦	\textnaira		
₡	\textcolonmonetary	€	\texteuro	₱	\textpeso		
¤	\textcurrency	f	\textflorin	£	\textsterling*		

* It's generally preferable to use the corresponding symbol from Table 3 on page 10 because the symbols in that table work properly in both text mode and math mode.

Table 31: marvosym Currency Symbols

𝒟	\Denarius	€	\EUR	€	\EURdig	€	\EURtm	℔	\Pfund
@	\Ecommerce	€	\EURcr	€	\EURhv	$	\EyesDollar	β	\Shilling

The different euro signs are meant to be visually compatible with different fonts—Courier (\EURcr), Helvetica (\EURhv), Times Roman (\EURtm), and the marvosym digits listed in Table 197 (\EURdig). The mathdesign package redefines \texteuro to be visually compatible with one of three additional fonts: Utopia (€), Charter (€), or Garamond (€).

Table 32: wasysym Currency Symbols

¢	\cent	¤	\currency

Table 33: GiNA2e Currency Symbols

€	\Euro	₰	\Pound

Table 34: teubner Currency Symbols

⅄	\denarius	ↄ	\hemiobelion	ↄ	\tetartemorion
⊢	\dracma	⚡	\stater		

Table 35: eurosym Euro Signs

€	\geneuro	€	\geneuronarrow	€	\geneurowide	€	\officialeuro

\euro is automatically mapped to one of the above—by default, \officialeuro—based on a eurosym package option. See the eurosym documentation for more information. The \geneuro... characters are generated from the current body font's "C" character and therefore may not appear exactly as shown.

Table 36: fourier Euro Signs

€	\eurologo	€	\texteuro

Table 37: textcomp Legal Symbols

Ⓟ	\textcircledP	©	©	\textcopyright		℠	\textservicemark
ↄ	\textcopyleft	®	®	\textregistered	™	™	\texttrademark

Where two symbols are present, the left one is the "faked" symbol that LaTeX 2ε provides by default, and the right one is the "true" symbol that textcomp makes available.

See http://www.tex.ac.uk/cgi-bin/texfaq2html?label=tradesyms for solutions to common problems that occur when using these symbols (e.g., getting a "ⓡ" when you expected to get a "®").

Table 38: cclicenses Creative Commons License Icons

🅭	\cc	🅯	\ccby	🅮	\ccnc*	🅰	\ccnd	🅱	\ccsa*

* These symbols utilize the rotating package and therefore display improperly in some DVI viewers.

Table 39: textcomp Old-style Numerals

0	\textzerooldstyle	4	\textfouroldstyle	8	\texteightoldstyle
1	\textoneoldstyle	5	\textfiveoldstyle	9	\textnineoldstyle
2	\texttwooldstyle	6	\textsixoldstyle		
3	\textthreeoldstyle	7	\textsevenoldstyle		

Rather than use the bulky \textoneoldstyle, \texttwooldstyle, etc. commands shown above, consider using \oldstylenums{...} to typeset an old-style number.

Table 40: Miscellaneous textcomp Symbols

*	\textasteriskcentered	a	a		\textordfeminine
‖	\textbardbl	o	o		\textordmasculine
◯	\textbigcircle		¶		\textparagraph*
ƀ	\textblank		·		\textperiodcentered
¦	\textbrokenbar		‱		\textpertenthousand
•	\textbullet		‰		\textperthousand
†	\textdagger*		¶		\textpilcrow
‡	\textdaggerdbl*		'		\textquotesingle
=	\textdblhyphen		'		\textquotestraightbase
=	\textdblhyphenchar		"		\textquotestraightdblbase
℅	\textdiscount		℞		\textrecipe
℮	\textestimated		※		\textreferencemark
‽	\textinterrobang		§		\textsection*
¡	\textinterrobangdown		—		\textthreequartersemdash
♪	\textmusicalnote		~		\texttildelow
№	\textnumero		—		\texttwelveudash
○	\textopenbullet				

Where two symbols are present, the left one is the "faked" symbol that LaTeX 2_ε provides by default, and the right one is the "true" symbol that textcomp makes available.

* It's generally preferable to use the corresponding symbol from Table 3 on page 10 because the symbols in that table work properly in both text mode and math mode.

Table 41: Miscellaneous wasysym Text-mode Symbols

‰	\permil

3 Mathematical symbols

Most, but not all, of the symbols in this section are math-mode only. That is, they yield a "`Missing $ inserted`" error message if not used within `$...$`, `\[...\]`, or another math-mode environment. Operators marked as "variable-sized" are taller in displayed formulas, shorter in in-text formulas, and possibly shorter still when used in various levels of superscripts or subscripts.

Alphanumeric symbols (e.g., "$\mathscr{L}$" and "$\mathbb{Z}$") are usually produced using one of the math alphabets in Table 213 rather than with an explicit symbol command. Look there first if you need a symbol for a transform, number set, or some other alphanumeric.

Although there have been many requests on `comp.text.tex` for a contradiction symbol, the ensuing discussion invariably reveals innumerable ways to represent contradiction in a proof, including "↯" (`\blitza`), "⇒⇐" (`\Rightarrow\Leftarrow`), "⊥" (`\bot`), "↮" (`\nleftrightarrow`), and "※" (`\textreferencemark`). Because of the lack of notational consensus, it is probably better to spell out "Contradiction!" than to use a symbol for this purpose. Similarly, discussions on `comp.text.tex` have revealed that there are a variety of ways to indicate the mathematical notion of "is defined as". Common candidates include "$\triangleq$" (`\triangleq`), "$\equiv$" (`\equiv`), "$:=$" (*various*[1]), and "$\stackrel{\text{def}}{=}$" (`\stackrel{\text{\tiny def}}{=}`). See also the example of `\equalsfill` on page 118. Depending upon the context, disjoint union may be represented as "$\coprod$" (`\coprod`), "$\sqcup$" (`\sqcup`), "$\cup$" (`\dotcup`), "$\oplus$" (`\oplus`), or any of a number of other symbols.[2] Finally, the average value of a variable x is written by some people as "$\overline{x}$" (`\overline{x}`), by some people as "$\langle x \rangle$" (`\langle x \rangle`), and by some people as "$\varnothing x$" or "$\varnothing x$" (`\diameter x` or `\varnothing x`). The moral of the story is that you should be careful always to explain your notation to avoid confusing your readers.

Table 42: Math-Mode Versions of Text Symbols

$	`\mathdollar`	¶	`\mathparagraph`	£	`\mathsterling`
…	`\mathellipsis`	§	`\mathsection`	_	`\mathunderscore`

It's generally preferable to use the corresponding symbol from Table 3 on page 10 because the symbols in that table work properly in both text mode and math mode.

Table 43: cmll Unary Operators

!	`\oc`*	↑	`\shneg`	?	`\wn`*
↕	`\shift`	↓	`\shpos`		

* `\oc` and `\wn` differ from "!" and "?" in terms of their math-mode spacing: `$A=!B$` produces "$A =!B$", for example, while `$A=\oc B$` produces "$A = !B$".

[1] In txfonts, pxfonts, and mathtools the symbol is called `\coloneqq`. In mathabx and MnSymbol it's called `\coloneq`. In colonequals it's called `\colonequals`.

[2] Bob Tennent listed these and other disjoint-union symbol possibilities in a November 2007 post to `comp.text.tex`.

TABLE 44: Binary Operators

∐	\amalg	∪	\cup	⊕	\oplus	×	\times
∗	\ast	†	\dagger	⊘	\oslash	◁	\triangleleft
◯	\bigcirc	‡	\ddagger	⊗	\otimes	▷	\triangleright
▽	\bigtriangledown	⋄	\diamond	±	\pm	⊴	\unlhd*
△	\bigtriangleup	÷	\div	⊳	\rhd*	⊵	\unrhd*
•	\bullet	◁	\lhd*	\	\setminus	⊎	\uplus
∩	\cap	∓	\mp	⊓	\sqcap	∨	\vee
·	\cdot	⊙	\odot	⊔	\sqcup	∧	\wedge
∘	\circ	⊖	\ominus	⋆	\star	≀	\wr

* Not predefined in LaTeX 2_ε. Use one of the packages latexsym, amsfonts, amssymb, txfonts, pxfonts, or wasysym.

TABLE 45: $\mathcal{AMS}$ Binary Operators

⊼	\barwedge	⊚	\circledcirc	⊺	\intercal*
⊡	\boxdot	⊝	\circleddash	⋋	\leftthreetimes
⊟	\boxminus	⋓	\Cup	⋉	\ltimes
⊞	\boxplus	⋎	\curlyvee	⋌	\rightthreetimes
⊠	\boxtimes	⋏	\curlywedge	⋊	\rtimes
⋒	\Cap	⋇	\divideontimes	∖	\smallsetminus
∙	\centerdot	∔	\dotplus	⩒	\veebar
⊛	\circledast	⩔	\doublebarwedge		

* Some people use a superscripted \intercal for matrix transpose: "A^\intercal" ↦ "$A^\intercal$". (See the May 2009 comp.text.tex thread, "raising math symbols", for suggestions about altering the height of the superscript.) \top (Table 139 on page 59), T, and \mathsf{T} are other popular choices: "$A^\top$", "A^T", "A^{T}".

TABLE 46: stmaryrd Binary Operators

⟠	\baro	⫼	\interleave	⊛	\varoast
⦸	\bbslash	⧏	\leftslice	⊍	\varobar
⅋	\binampersand	⩛	\merge	⊘	\varobslash
⋒	\bindnasrepma	⊖	\minuso	⊚	\varocircle
⧈	\boxast	⫫	\moo	⊙	\varodot
⧈	\boxbar	⨣	\nplus	⊖	\varogreaterthan
⧈	\boxbox	⊍	\obar	⊖	\varolessthan
⧅	\boxbslash	⧈	\oblong	⊖	\varominus
⧇	\boxcircle	⦸	\obslash	⊕	\varoplus
⧈	\boxdot	⊖	\ogreaterthan	⊘	\varoslash
⧈	\boxempty	⊖	\olessthan	⊗	\varotimes
⧄	\boxslash	⊻	\ovee	⊻	\varovee
⋟	\curlyveedownarrow	⍟	\owedge	⍟	\varowedge
⋎	\curlyveeuparrow	⧐	\rightslice	⨯	\vartimes
⩟	\curlywedgedownarrow	⫽	\sslash	⟙	\Ydown
⩞	\curlywedgeuparrow	⨅	\talloblong	≺	\Yleft
⧵	\fatbslash	◯	\varbigcirc	≻	\Yright
⨟	\fatsemi	⋎	\varcurlyvee	⟘	\Yup
⫽	\fatslash	⋏	\varcurlywedge		

TABLE 47: wasysym Binary Operators

◁	\lhd	○	\ocircle	▶	\RHD	⊵	\unrhd
◀	\LHD	▷	\rhd	⊴	\unlhd		

TABLE 48: txfonts/pxfonts Binary Operators

⦶	\circledbar	⍟	\circledwedge	○	\medcirc
⦸	\circledbslash	⅋	\invamp	⨦	\sqcapplus
⊛	\circledvee	●	\medbullet	⨧	\sqcupplus

TABLE 49: mathabx Binary Operators

∗	\ast	⋏	\curlywedge	⊓	\sqcap
✻	\Asterisk	⨪	\divdot	⊔	\sqcup
⩛	\barwedge	⨳	\divideontimes	⨅	\sqdoublecap
★	\bigstar	∸	\dotdiv	⨆	\sqdoublecup
✶	\bigvarstar	∔	\dotplus	▫	\square
◆	\blackdiamond	⋇	\dottimes	⊞	\squplus
∩	\cap	⩚	\doublebarwedge	⋅	\udot
⨣	\circplus	⋒	\doublecap	⊎	\uplus
∗	\coasterisk	⋓	\doublecup	⋆	\varstar
✲	\coAsterisk	⋉	\ltimes	∨	\vee
✳	\convolution	⨢	\pluscirc	⩡	\veebar
∪	\cup	⋊	\rtimes	⩒	\veedoublebar
⋎	\curlyvee	▪	\sqbullet	∧	\wedge

Many of the above glyphs go by multiple names. \centerdot is equivalent to \sqbullet, and \ast is equivalent to *. \asterisk produces the same glyph as \ast, but as an ordinary symbol, not a binary operator. Similarly, \bigast produces a large-operator version of the \Asterisk binary operator, and \bigcoast produces a large-operator version of the \coAsterisk binary operator.

TABLE 50: MnSymbol Binary Operators

⨿	\amalg	⩏	\doublesqcup	∴	\righttherefore
∗	\ast	⩔	\doublevee	⩜	\rightthreetimes
⍀	\backslashdiv	⩓	\doublewedge	⊱	\rightY
⋈	\bowtie	∵	\downtherefore	⋊	\rtimes
•	\bullet	⋎	\downY	⁒	\slashdiv
∩	\cap	⧢	\dtimes	∏	\smallprod
⩋	\capdot	∴	\fivedots	⊓	\sqcap
⩊	\capplus	∞	\hbipropto	⩍	\sqcapdot
·	\cdot	‥	\hdotdot	⨎	\sqcapplus
∘	\circ	⌜	\lefthalfcap	⊔	\sqcup
⋏	\closedcurlyvee	⌞	\lefthalfcup	⩏	\sqcupdot
⋀	\closedcurlywedge	∶	\lefttherefore	⨏	\sqcupplus
∪	\cup	⩝	\leftthreetimes	::	\squaredots
⊍	\cupdot	⋋	\leftY	×	\times
⊎	\cupplus	⋉	\ltimes	⋰	\udotdot
⋎	\curlyvee	⧹	\medbackslash	∴	\uptherefore
⋏	\curlyveedot	○	\medcircle	⋌	\upY
⋏	\curlywedge	⟋	\medslash	⧖	\utimes
⋀	\curlywedgedot	∣	\medvert	∞	\vbipropto
⋱	\ddotdot	∣·	\medvertdot	:	\vdotdot
∴	\diamonddots	−	\minus	∨	\vee

(continued on next page)

(continued from previous page)

÷	`\div`	∸	`\minusdot`	⩒	`\veedot`
∣·	`\dotmedvert`	∓	`\mp`	⧚	`\vertbowtie`
∸	`\dotminus`	⟃	`\neswbipropto`	·∣·	`\vertdiv`
⋒	`\doublecap`	⟄	`\nwsebipropto`	∧	`\wedge`
⋓	`\doublecup`	+	`\plus`	⩓	`\wedgedot`
⋦	`\doublecurlyvee`	±	`\pm`	≀	`\wreath`
⋏	`\doublecurlywedge`	⌝	`\righthalfcap`		
⩊	`\doublesqcap`	⌟	`\righthalfcup`		

MnSymbol defines `\setminus` and `\smallsetminus` as synonyms for `\medbackslash`; `\Join` as a synonym for `\bowtie`; `\wr` as a synonym for `\wreath`; `\shortmid` as a synonym for `\medvert`; `\Cap` as a synonym for `\doublecap`; `\Cup` as a synonym for `\doublecup`; and, `\uplus` as a synonym for `\cupplus`.

Table 51: mathdesign Binary Operators

⨰	`\dtimes`	⨱	`\udtimes`	⨲	`\utimes`

The mathdesign package additionally provides versions of each of the binary operators shown in Table 45 on page 24.

Table 52: cmll Binary Operators

⅋	`\parr`	&	`\with`*

* `\with` differs from "&" in terms of its math-mode spacing: `$A \& B$` produces "$A\&B$", for example, while `$A \with B$` produces "$A \,\&\, B$".

Table 53: shuffle Binary Operators

⧢	`\cshuffle`	⧢	`\shuffle`

Table 54: ulsy Geometric Binary Operators

⨁	`\odplus`

Table 55: mathabx Geometric Binary Operators

▾	\blacktriangledown	⊞	\boxright	⊖	\ominus
◂	\blacktriangleleft	⧄	\boxslash	⊕	\oplus
▸	\blacktriangleright	⊠	\boxtimes	⊦	\oright
▴	\blacktriangleup	⊤	\boxtop	⊘	\oslash
⊛	\boxasterisk	⧋	\boxtriangleup	⊗	\otimes
⧅	\boxbackslash	□	\boxvoid	⊤	\otop
⊟	\boxbot	⊛	\oasterisk	⧋	\otriangleup
⊡	\boxcirc	⦸	\obackslash	◯	\ovoid
⊛	\boxcoasterisk	⊥	\obot	▿	\smalltriangledown
⊞	\boxdiv	⊙	\ocirc	◃	\smalltriangleleft
⊡	\boxdot	⊛	\ocoasterisk	▹	\smalltriangleright
⊞	\boxleft	⊘	\odiv	▵	\smalltriangleup
⊟	\boxminus	⊙	\odot		
⊞	\boxplus	⊦	\oleft		

Table 56: MnSymbol Geometric Binary Operators

⧅	\boxbackslash	▼	\filledmedtriangledown	◎	\ocirc
⧈	\boxbox	◀	\filledmedtriangleleft	⊙	\odot
⊡	\boxdot	▶	\filledmedtriangleright	⊖	\ominus
⊟	\boxminus	▲	\filledmedtriangleup	⊕	\oplus
⊞	\boxplus	■	\filledsquare	⊘	\oslash
⧄	\boxslash	★	\filledstar	⊛	\ostar
⊠	\boxtimes	▾	\filledtriangledown	⊗	\otimes
◫	\boxvert	◂	\filledtriangleleft	⧋	\otriangle
◇	\diamondbackslash	▸	\filledtriangleright	◯	\overt
◈	\diamonddiamond	▴	\filledtriangleup	☆	\pentagram
⟐	\diamonddot	◇	\meddiamond	⋄	\smalldiamond
⟡	\diamondminus	□	\medsquare	▫	\smallsquare
⟠	\diamondplus	☆	\medstar	⋆	\smallstar
⧄	\diamondslash	▽	\medtriangledown	▿	\smalltriangledown
⨻	\diamondtimes	◁	\medtriangleleft	◃	\smalltriangleleft
⧫	\diamondvert	▷	\medtriangleright	▹	\smalltriangleright
▽	\downslice	△	\medtriangleup	▵	\smalltriangleup
◆	\filleddiamond	⊛	\oast	⋆	\thinstar
■	\filledmedsquare	⦸	\obackslash	△	\upslice

MnSymbol defines \blacksquare as a synonym for \filledmedsquare; \square and \Box as synonyms for \medsquare; \diamond as a synonym for \smalldiamond; \Diamond as a synonym for \meddiamond; \star as a synonym for \thinstar; \circledast as a synonym for \oast; \circledcirc as a synonym for \ocirc; and, \circleddash as a synonym for \ominus.

TABLE 57: Variable-sized Math Operators

$\bigcap$	`\bigcap`	$\bigotimes$	`\bigotimes`	$\bigwedge$	`\bigwedge`	$\prod$	`\prod`
$\bigcup$	`\bigcup`	$\bigsqcup$	`\bigsqcup`	$\coprod$	`\coprod`	$\sum$	`\sum`
$\bigodot$	`\bigodot`	$\biguplus$	`\biguplus`	$\int$	`\int`		
$\bigoplus$	`\bigoplus`	$\bigvee$	`\bigvee`	$\oint$	`\oint`		

TABLE 58: $\mathcal{AMS}$ Variable-sized Math Operators

$\iint$	`\iint`	$\iiint$	`\iiint`
$\iiiint$	`\iiiint`	$\idotsint$	`\idotsint`

TABLE 59: stmaryrd Variable-sized Math Operators

$\boxbig$	`\bigbox`	$\biginterleave$	`\biginterleave`	$\bigsqcap$	`\bigsqcap`
$\bigcurlyvee$	`\bigcurlyvee`	$\bignplus$	`\bignplus`	$\bigtriangledown$	`\bigtriangledown`
$\bigcurlywedge$	`\bigcurlywedge`	$\bigparallel$	`\bigparallel`	$\bigtriangleup$	`\bigtriangleup`

TABLE 60: wasysym Variable-sized Math Operators

$\int$	`\int`†	$\iint$	`\iint`	$\iiint$	`\iiint`
$\varint$	`\varint`*	$\varoint$	`\varoint`*	$\oiint$	`\oiint`

None of the preceding symbols are defined when wasysym is passed the nointegrals option.

* Not defined when wasysym is passed the integrals option.

† Defined only when wasysym is passed the integrals option. Otherwise, the default LaTeX `\int` glyph (as shown in Table 57) is used.

TABLE 61: mathabx Variable-sized Math Operators

	\bigcurlyvee		\bigboxslash		\bigoright
	\bigsqcap		\bigboxtimes		\bigoslash
	\bigcurlywedge		\bigboxtop		\bigotop
	\bigboxasterisk		\bigboxtriangleup		\bigotriangleup
	\bigboxbackslash		\bigboxvoid		\bigovoid
	\bigboxbot		\bigcomplementop		\bigplus
	\bigboxcirc		\bigoasterisk		\bigsquplus
	\bigboxcoasterisk		\bigobackslash		\bigtimes
	\bigboxdiv		\bigobot		\iiint
	\bigboxdot		\bigocirc		\iint
	\bigboxleft		\bigocoasterisk		\int
	\bigboxminus		\bigodiv		\oiint
	\bigboxplus		\bigoleft		\oint
	\bigboxright		\bigominus		

TABLE 62: txfonts/pxfonts Variable-sized Math Operators

$\boxplus$	$\bigboxplus$	\bigsqcapplus	$\oint\!\!\!\!\circlearrowleft$	$\oint\!\!\!\!\circlearrowleft$	\ointclockwise
$\boxplus$	$\bigboxplus$	\bigsqcupplus	$\oint\!\!\!\!\circlearrowleft$	$\oint\!\!\!\!\circlearrowleft$	\ointctrclockwise
$\fint$	$\fint$	\fint	$\iiint\!\!\square$	$\iiint\!\!\square$	\sqiiint
$\int\cdots\int$	$\int\cdots\int$	\idotsint	$\iint\!\!\square$	$\iint\!\!\square$	\sqiint
$\iiiint$	$\iiiint$	\iiiint	$\int\!\!\square$	$\int\!\!\square$	\sqint
$\iiint$	$\iiint$	\iiint	$\iiint\!\!\circlearrowleft$	$\iiint\!\!\circlearrowleft$	\varoiiintclockwise
$\iint$	$\iint$	\iint	$\iiint\!\!\circlearrowleft$	$\iiint\!\!\circlearrowleft$	\varoiiintctrclockwise
$\oiiint$	$\oiiint$	\oiiintclockwise	$\oint\!\!\!\!\circlearrowleft$	$\oint\!\!\!\!\circlearrowleft$	\varoiintclockwise
$\oiiint$	$\oiiint$	\oiiintctrclockwise	$\oint\!\!\!\!\circlearrowleft$	$\oint\!\!\!\!\circlearrowleft$	\varoiintctrclockwise
$\oiiint$	$\oiiint$	\oiiint	$\oint\!\!\!\!\circlearrowleft$	$\oint\!\!\!\!\circlearrowleft$	\varointclockwise
$\oint$	$\oint$	\oiintclockwise	$\oint\!\!\!\!\circlearrowleft$	$\oint\!\!\!\!\circlearrowleft$	\varointctrclockwise
$\oint$	$\oint$	\oiintctrclockwise	$\times$	$\bigtimes$	\varprod
$\oint$	$\oint$	\oiint			

TABLE 63: esint Variable-sized Math Operators

$\int\cdots\int$	$\idotsint$	\dotsint	$\oint\!\!\!\!\bigcirc$	$\oint\!\!\!\!\bigcirc\!\!\!\!\rightarrow$	\ointclockwise
$\fint$	$\fint$	\fint	$\oint\!\!\!\!\bigcirc\!\!\!\!\rightarrow$	$\oint\!\!\!\!\bigcirc\!\!\!\!\rightarrow$	\ointctrclockwise
$\iiiint$	$\iiiint$	\iiiint	$\#\!\!\#\!\!\#$	$\#\!\!\#\!\!\#\!\!\square$	\sqiint
$\iiint$	$\iiint$	\iiint	$\#\!\!\#$	$\#\!\!\#\!\!\square$	\sqint
$\iint$	$\iint$	\iint	$\#\!\!\#\!\!\#$	$\#\!\!\#\!\!\#\!\!\bigcirc$	\varoiint
$\int\!\!\!\!\downarrow$	$\int\!\!\!\!\downarrow$	\landdownint	$\oint\!\!\!\!\bigcirc$	$\oint\!\!\!\!\bigcirc$	\varointclockwise
$\int\!\!\!\!\uparrow$	$\int\!\!\!\!\uparrow$	\landupint	$\oint\!\!\!\!\bigcirc$	$\oint\!\!\!\!\bigcirc$	\varointctrclockwise
$\#\!\!\#\!\!\#$	$\#\!\!\#\!\!\#\!\!\bigcirc$	\oiint			

TABLE 64: MnSymbol Variable-sized Math Operators

$\cap$	$\bigcap$	\bigcap	$\ominus$	$\bigominus$	\bigominus	$\complement$	$\complement$	\complement
$\cap\!\!\cdot$	$\bigcap\!\!\cdot$	\bigcapdot	$\oplus$	$\bigoplus$	\bigoplus	$\amalg$	$\coprod$	\coprod
$\cap\!\!+$	$\bigcap\!\!+$	\bigcapplus	$\oslash$	$\bigoslash$	\bigoslash	$\int\!\cdots\!\int$	$\int\!\cdots\!\int$	\idotsint
$\bigcirc$	$\bigcirc$	\bigcircle	$\circledast$	$\bigcirc\!\!\!\!\ast$	\bigostar	$\iiiint$	$\iiiint$	\iiiint
$\cup$	$\bigcup$	\bigcup	$\otimes$	$\bigotimes$	\bigotimes	$\iiint$	$\iiint$	\iiint
$\cup\!\!\cdot$	$\bigcup\!\!\cdot$	\bigcupdot	$\circledcirc$	$\bigcirc\!\!\!\!\circ$	\bigotriangle	$\iint$	$\iint$	\iint
$\uplus$	$\bigcup\!\!+$	\bigcupplus*	$\circledcirc$	$\bigcirc\!\!\!\!\circ$	\bigovert	$\int$	$\int$	\int
$\curlyvee$	$\bigcurlyvee$	\bigcurlyvee	$+$	$+$	\bigplus	$\int\!\!\!\!\downarrow$	$\int\!\!\!\!\downarrow$	\landdownint
$\curlyvee\!\!\cdot$	$\bigcurlyvee\!\!\cdot$	\bigcurlyveedot	$\sqcap$	$\bigsqcap$	\bigsqcap	$\int\!\!\!\!\uparrow$	$\int\!\!\!\!\uparrow$	\landupint
$\curlywedge$	$\bigcurlywedge$	\bigcurlywedge	$\sqcap\!\!\cdot$	$\bigsqcap\!\!\cdot$	\bigsqcapdot	$\oint\!\!\!\!\bigcirc$	$\oint\!\!\!\!\bigcirc$	\lcircleleftint
$\curlywedge\!\!\cdot$	$\bigcurlywedge\!\!\cdot$	\bigcurlywedgedot	$\sqcap\!\!+$	$\bigsqcap\!\!+$	\bigsqcapplus	$\oint\!\!\!\!\bigcirc$	$\oint\!\!\!\!\bigcirc$	\lcirclerightint

(continued on next page)

(continued from previous page)

$\Curlyvee$	$\Curlyvee$	`\bigdoublecurlyvee`	$\bigsqcup$	$\bigsqcup$	`\bigsqcup`	$\oiint$	$\oiint$	`\oiint`
$\Curlywedge$	$\Curlywedge$	`\bigdoublecurlywedge`	$\bigsqcup$	$\bigsqcup$	`\bigsqcupdot`	$\oint$	$\oint$	`\oint`
$\Vvee$	$\Vvee$	`\bigdoublevee`	$\bigsqcup$	$\bigsqcup$	`\bigsqcupplus`	$\prod$	$\prod$	`\prod`
$\Wedge$	$\Wedge$	`\bigdoublewedge`	$\bigtimes$	$\bigtimes$	`\bigtimes`	$\oint$	$\oint$	`\rcircleleftint`
$\circledast$	$\circledast$	`\bigoast`	$\bigvee$	$\bigvee$	`\bigvee`	$\oint$	$\oint$	`\rcirclerightint`
$\bigcirc$	$\bigcirc$	`\bigobackslash`	$\bigvee$	$\bigvee$	`\bigveedot`	$\fint$	$\fint$	`\strokedint`
$\bigcirc$	$\bigcirc$	`\bigocirc`	$\bigwedge$	$\bigwedge$	`\bigwedge`	$\sum$	$\sum$	`\sum`
$\bigodot$	$\bigodot$	`\bigodot`	$\bigwedge$	$\bigwedge$	`\bigwedgedot`	$\sumint$	$\sumint$	`\sumint`

* MnSymbol defines `\biguplus` as a synonym for `\bigcupplus`.

TABLE 65: mathdesign Variable-sized Math Operators

$\fint$	$\fint$	`\intclockwise`	$\oint$	$\oint$	`\ointclockwise`
$\oiiint$	$\oiiint$	`\oiiint`	$\oint$	$\oint$	`\ointctrclockwise`
$\oiint$	$\oiint$	`\oiint`			

The mathdesign package provides three versions of each integral—in fact, of every symbol—to accompany different text fonts: Utopia ($\int$), Garamond ($\int$), and Charter ($\int$).

TABLE 66: cmll Large Math Operators

$\parr$	`\bigparr`	$\&$	`\bigwith`

Table 67: Binary Relations

$\approx$	`\approx`	$\equiv$	`\equiv`	$\perp$	`\perp`	$\smile$	`\smile`
$\asymp$	`\asymp`	$\frown$	`\frown`	$\prec$	`\prec`	$\succ$	`\succ`
$\bowtie$	`\bowtie`	$\bowtie$	`\Join`*	$\preceq$	`\preceq`	$\succeq$	`\succeq`
$\cong$	`\cong`	$\mid$	`\mid`†	$\propto$	`\propto`	$\vdash$	`\vdash`
$\dashv$	`\dashv`	$\models$	`\models`	$\sim$	`\sim`		
$\doteq$	`\doteq`	$\parallel$	`\parallel`	$\simeq$	`\simeq`		

* Not predefined in LaTeX 2_ε. Use one of the packages latexsym, amsfonts, amssymb, mathabx, txfonts, pxfonts, or wasysym.

† The difference between `\mid` and `|` is that the former is a binary relation while the latter is a math ordinal. Consequently, LaTeX typesets the two with different surrounding spacing. Contrast "`P(A | B)`" $\mapsto$ "$P(A|B)$" with "`P(A \mid B)`" $\mapsto$ "$P(A \mid B)$".

Table 68: $\mathcal{AMS}$ Binary Relations

$\approxeq$	`\approxeq`	$\eqcirc$	`\eqcirc`	$\succapprox$	`\succapprox`
$\backepsilon$	`\backepsilon`	$\fallingdotseq$	`\fallingdotseq`	$\succcurlyeq$	`\succcurlyeq`
$\backsim$	`\backsim`	$\multimap$	`\multimap`	$\succsim$	`\succsim`
$\backsimeq$	`\backsimeq`	$\pitchfork$	`\pitchfork`	$\therefore$	`\therefore`
$\because$	`\because`	$\precapprox$	`\precapprox`	$\thickapprox$	`\thickapprox`
$\between$	`\between`	$\preccurlyeq$	`\preccurlyeq`	$\thicksim$	`\thicksim`
$\Bumpeq$	`\Bumpeq`	$\precsim$	`\precsim`	$\varpropto$	`\varpropto`
$\bumpeq$	`\bumpeq`	$\risingdotseq$	`\risingdotseq`	$\Vdash$	`\Vdash`
$\circeq$	`\circeq`	$\shortmid$	`\shortmid`	$\vDash$	`\vDash`
$\curlyeqprec$	`\curlyeqprec`	$\shortparallel$	`\shortparallel`	$\Vvdash$	`\Vvdash`
$\curlyeqsucc$	`\curlyeqsucc`	$\smallfrown$	`\smallfrown`		
$\doteqdot$	`\doteqdot`	$\smallsmile$	`\smallsmile`		

Table 69: $\mathcal{AMS}$ Negated Binary Relations

$\ncong$	`\ncong`	$\nshortparallel$	`\nshortparallel`	$\nVDash$	`\nVDash`
$\nmid$	`\nmid`	$\nsim$	`\nsim`	$\precnapprox$	`\precnapprox`
$\nparallel$	`\nparallel`	$\nsucc$	`\nsucc`	$\precnsim$	`\precnsim`
$\nprec$	`\nprec`	$\nsucceq$	`\nsucceq`	$\succnapprox$	`\succnapprox`
$\npreceq$	`\npreceq`	$\nvDash$	`\nvDash`	$\succnsim$	`\succnsim`
$\nshortmid$	`\nshortmid`	$\nvdash$	`\nvdash`		

Table 70: stmaryrd Binary Relations

$\Subset$	`\inplus`	$\Supset$	`\niplus`

Table 71: wasysym Binary Relations

⌐	\invneg	⇝	\leadsto	∝	\wasypropto
⋈	\Join	⊛	\logof		

Table 72: txfonts/pxfonts Binary Relations

⦸	\circledgtr	⋉	\lJoin	×	\opentimes
⦵	\circledless	⋈	\lrtimes	⫫	\Perp
:≈	\colonapprox	⊸	\multimap	⪷	\preceqq
::≈	\Colonapprox	⊶	\multimapboth	⪵	\precneqq
:−	\coloneq	⧟	\multimapbothvert	⋊	\rJoin
::−	\Coloneq	⧟	\multimapdot	⪦	\strictfi
::=	\Coloneqq	⧟	\multimapdotboth	⪧	\strictif
:=	\coloneqq*	⧟	\multimapdotbothA	⪦	\strictiff
::∼	\Colonsim	⧟	\multimapdotbothAvert	⪸	\succeqq
:∼	\colonsim	⧟	\multimapdotbothB	⪹	\succneqq
−::	\Eqcolon	⧟	\multimapdotbothBvert	//	\varparallel
−:	\eqcolon	⧟	\multimapdotbothvert	\\	\varparallelinv
=:	\eqqcolon	⧟	\multimapdotinv	⫦	\VvDash
=::	\Eqqcolon	⊷	\multimapinv		
≂	\eqsim	⤫	\openJoin		

* As an alternative to using txfonts/pxfonts, a ":=" symbol can be constructed with "\mathrel{\mathop:}=".

Table 73: txfonts/pxfonts Negated Binary Relations

≉	\napproxeq	⪹	\npreccurlyeq	≋	\nthickapprox
≁	\nasymp	⪵	\npreceqq	↞	\ntwoheadleftarrow
≁	\nbacksim	⋨	\nprecsim	↠	\ntwoheadrightarrow
≋	\nbacksimeq	≄	\nsimeq	∦	\nvarparallel
≠	\nbumpeq	⪸	\nsuccapprox	∤	\nvarparallelinv
≠	\nBumpeq	⪺	\nsucccurlyeq	⊮	\nVdash
≢	\nequiv	⪶	\nsucceqq		
≨	\nprecapprox	≿	\nsuccsim		

TABLE 74: mathabx Binary Relations

≬	\between	∣	\divides	≓	\risingdotseq
≒	\botdoteq	≒	\dotseq	≿	\succapprox
≎	\Bumpedeq	≖	\eqbumped	⪼	\succcurlyeq
≏	\bumpedeq	≗	\eqcirc	⪺	\succdot
≗	\circeq	≕	\eqcolon	≻	\succsim
≔	\coloneq	≒	\fallingdotseq	∴	\therefore
≙	\corresponds	⪺	\ggcurly	≐	\topdoteq
⋞	\curlyeqprec	⪻	\llcurly	⊨	\vDash
⋟	\curlyeqsucc	≾	\precapprox	⊩	\Vdash
⫴	\DashV	⪷	\preccurlyeq	⊫	\VDash
⫤	\Dashv	≺	\precdot	⊪	\Vvdash
⫣	\dashVv	≾	\precsim		

TABLE 75: mathabx Negated Binary Relations

≉	\napprox	⋬	\notperp	⊭	\nvDash
≇	\ncong	⊀	\nprec	⊯	\nVDash
⋠	\ncurlyeqprec	⪹	\nprecapprox	⊮	\nVdash
⋡	\ncurlyeqsucc	⋠	\npreccurlyeq	⊬	\nvdash
⊯	\nDashv	⪵	\npreceq	⊮	\nVvash
⫮	\ndashV	⋨	\nprecsim	⪹	\precnapprox
⊮	\ndashv	⊁	\nsim	⪵	\precneq
⫮	\nDashV	≄	\nsimeq	⋨	\precnsim
⫮	\ndashVv	⊁	\nsucc	⪹	\succnapprox
≠	\neq	⪹	\nsuccapprox	⪶	\succneq
≭	\notasymp	⪼	\nsucccurlyeq	⋩	\succnsim
∤	\notdivides	⪶	\nsucceq		
≢	\notequiv	⋩	\nsuccsim		

The \changenotsign command toggles the behavior of \not to produce either a vertical or a diagonal slash through a binary operator. Thus, "$a \not= b$" can be made to produce either "$a \neq b$" or "$a \neq b$".

TABLE 76: MnSymbol Binary Relations

≈	\approx	≖	\eqbump	↖	\nwfootline	⩛	\seVdash
≊	\approxeq	≗	\eqcirc	↖	\nwfree	∥	\shortparallel
≳	\backapprox	≒	\eqdot	↘	\nwmodels	∼	\sim
≲	\backapproxeq	≃	\eqsim	⇘	\nwModels	≃	\simeq
≌	\backcong	=	\equal	↚	\nwsecrossing	≻	\succ
≂	\backeqsim	≡	\equalclosed	↘	\nwseline	≿	\succapprox

(continued on next page)

(continued from previous page)

∽	\backsim	≡	\equiv	⧹	\Nwseline	⪴	\succcurlyeq
⋍	\backsimeq	⧈	\equivclosed	↘	\nwvdash	≥	\succeq
⋒	\backtriplesim	≒	\fallingdotseq	⤥	\nwVdash	≿	\succsim
≬	\between	≙	\hateq	≺	\prec	↙	\swfootline
≎	\bumpeq	⤫	\hcrossing	⪷	\precapprox	↙	\swfree
≏	\Bumpeq	⊢	\leftfootline	≼	\preccurlyeq	↟	\swmodels
≗	\circeq	←	\leftfree	⪯	\preceq	⇞	\swModels
⧅	\closedequal	⫤	\leftmodels	≾	\precsim	↗	\swvdash
⋖	\closedprec	⫢	\leftModels	⊣	\rightfootline	↟	\swVdash
⋗	\closedsucc	∝	\leftpropto	→	\rightfree	≋	\triplesim
:=	\coloneq	—	\leftrightline	⊨	\rightmodels	|	\updownline
≅	\cong	═	\Leftrightline	⫦	\rightModels	‖	\Updownline
⋞	\curlyeqprec	◁	\leftslice	∞	\rightpropto	↾	\upfootline
⋟	\curlyeqsucc	⊣	\leftvdash	▷	\rightslice	↾	\upfree
≑	\doteq	⫣	\leftVdash	⊢	\rightvdash	⥣	\upmodels
÷	\Doteq	↗	\nefootline	⫧	\rightVdash	⥣	\upModels
⎣	\downfootline	↗	\nefree	≓	\risingdotseq	∝	\uppropto
↓	\downfree	⫽	\nemodels	↘	\sefootline	⊥	\upvdash
⫪	\downmodels	⫻	\neModels	↘	\sefree	⫫	\upVdash
⫫	\downModels	⁄	\neswline	⇘	\semodels	⤬	\vcrossing
∝	\downpropto	⫽	\Neswline	⫷	\seModels	⫦	\Vvdash
⊤	\downvdash	⫹	\nevdash	)(	\separated		
⫟	\downVdash	⫷	\neVdash	⇖	\sevdash		

MnSymbol additionally defines synonyms for some of the preceding symbols:

⊣	\dashv	(same as \leftvdash)
⧹	\diagdown	(same as \nwseline)
⁄	\diagup	(same as \neswline)
⁄	\divides	(same as \updownline)
÷	\doteqdot	(same as \Doteq)
⊨	\models	(same as \rightmodels)
‖	\parallel	(same as \Updownline)
⊥	\perp	(same as \upvdash)
∝	\propto	(same as \leftpropto)
—	\relbar	(same as \leftrightline)
═	\Relbar	(same as \Leftrightline)
∝	\varpropto	(same as \leftpropto)
⊨	\vDash	(same as \rightmodels)
⫦	\VDash	(same as \rightModels)
⊢	\vdash	(same as \rightvdash)
⫧	\Vdash	(same as \rightVdash)

TABLE 77: MnSymbol Negated Binary Relations

$\napprox$	\napprox	$\neqsim$	\neqsim	$\nnwModels$	\nnwModels	$\nsucc$	\nsucc
$\napproxeq$	\napproxeq	$\nequal$	\nequal	$\nnwseline$	\nnwseline	$\nsuccapprox$	\nsuccapprox
$\nbackapprox$	\nbackapprox	$\nequalclosed$	\nequalclosed	$\nNwseline$	\nNwseline	$\nsucccurlyeq$	\nsucccurlyeq
$\nbackapproxeq$	\nbackapproxeq	$\nequiv$	\nequiv	$\nnwvdash$	\nnwvdash	$\nsucceq$	\nsucceq
$\nbackcong$	\nbackcong	$\nequivclosed$	\nequivclosed	$\nnwVdash$	\nnwVdash	$\nsuccsim$	\nsuccsim
$\nbackeqsim$	\nbackeqsim	$\neswcrossing$	\neswcrossing	$\nprec$	\nprec	$\nswfootline$	\nswfootline
$\nbacksim$	\nbacksim	$\nfallingdotseq$	\nfallingdotseq	$\nprecapprox$	\nprecapprox	$\nswfree$	\nswfree
$\nbacksimeq$	\nbacksimeq	$\nhateq$	\nhateq	$\npreccurlyeq$	\npreccurlyeq	$\nswmodels$	\nswmodels
$\nbacktriplesim$	\nbacktriplesim	$\nleftfootline$	\nleftfootline	$\npreceq$	\npreceq	$\nswModels$	\nswModels
$\nbumpeq$	\nbumpeq	$\nleftfree$	\nleftfree	$\nprecsim$	\nprecsim	$\nswvdash$	\nswvdash
$\nBumpeq$	\nBumpeq	$\nleftmodels$	\nleftmodels	$\nrightfootline$	\nrightfootline	$\nswVdash$	\nswVdash
$\ncirceq$	\ncirceq	$\nleftModels$	\nleftModels	$\nrightfree$	\nrightfree	$\ntriplesim$	\ntriplesim
$\nclosedequal$	\nclosedequal	$\nleftrightline$	\nleftrightline	$\nrightmodels$	\nrightmodels	$\nupdownline$	\nupdownline
$\ncong$	\ncong	$\nLeftrightline$	\nLeftrightline	$\nrightModels$	\nrightModels	$\nUpdownline$	\nUpdownline
$\ncurlyeqprec$	\ncurlyeqprec	$\nleftvdash$	\nleftvdash	$\nrightvdash$	\nrightvdash	$\nupfootline$	\nupfootline
$\ncurlyeqsucc$	\ncurlyeqsucc	$\nleftVdash$	\nleftVdash	$\nrightVdash$	\nrightVdash	$\nupfree$	\nupfree
$\ndoteq$	\ndoteq	$\nnefootline$	\nnefootline	$\nrisingdotseq$	\nrisingdotseq	$\nupmodels$	\nupmodels
$\nDoteq$	\nDoteq	$\nnefree$	\nnefree	$\nsefootline$	\nsefootline	$\nupModels$	\nupModels
$\ndownfootline$	\ndownfootline	$\nnemodels$	\nnemodels	$\nsefree$	\nsefree	$\nupvdash$	\nupvdash
$\ndownfree$	\ndownfree	$\nneModels$	\nneModels	$\nsemodels$	\nsemodels	$\nupVdash$	\nupVdash
$\ndownmodels$	\ndownmodels	$\nneswline$	\nneswline	$\nseModels$	\nseModels	$\precnapprox$	\precnapprox
$\ndownModels$	\ndownModels	$\nNeswline$	\nNeswline	$\nsevdash$	\nsevdash	$\precnsim$	\precnsim
$\ndownvdash$	\ndownvdash	$\nnevdash$	\nnevdash	$\nseVdash$	\nseVdash	$\succnapprox$	\succnapprox
$\ndownVdash$	\ndownVdash	$\nneVdash$	\nneVdash	$\nshortmid$	\nshortmid	$\succnsim$	\succnsim
$\neqbump$	\neqbump	$\nnwfootline$	\nnwfootline	$\nshortparallel$	\nshortparallel		
$\neqcirc$	\neqcirc	$\nnwfree$	\nnwfree	$\nsim$	\nsim		
$\neqdot$	\neqdot	$\nnwmodels$	\nnwmodels	$\nsimeq$	\nsimeq		

MnSymbol additionally defines synonyms for some of the preceding symbols:

$\ndashv$	\ndashv	(same as \nleftvdash)
$\ndiagdown$	\ndiagdown	(same as \nnwseline)
$\ndiagup$	\ndiagup	(same as \nneswline)
$\ndivides$	\ndivides	(same as \nupdownline)
$\ne$	\ne	(same as \nequal)
$\neq$	\neq	(same as \nequal)
$\nmid$	\nmid	(same as \nupdownline)
$\nmodels$	\nmodels	(same as \nrightmodels)
$\nparallel$	\nparallel	(same as \nUpdownline)
$\nperp$	\nperp	(same as \nupvdash)
$\nrelbar$	\nrelbar	(same as \nleftrightline)
$\nRelbar$	\nRelbar	(same as \nLeftrightline)
$\nvDash$	\nvDash	(same as \nrightmodels)
$\nvdash$	\nvdash	(same as \nrightvdash)
$\nVdash$	\nVdash	(same as \nrightVdash)
$\nVDash$	\nVDash	(same as \nrightModels)

Table 78: mathtools Binary Relations

::≈	\Colonapprox	:−	\coloneq	−::	\Eqcolon
:≈	\colonapprox	:∼	\colonsim	=:	\eqqcolon
:=	\coloneqq	::∼	\Colonsim	=::	\Eqqcolon
::=	\Coloneqq	::	\dblcolon		
::−	\Coloneq	−:	\eqcolon		

Similar symbols can be defined using mathtools's `\vcentcolon`, which produces a colon centered on the font's math axis:

$=:=$ "=:=" vs. $=:=$ "=\vcentcolon="

Table 79: turnstile Binary Relations

$\left\|\frac{def}{abc}\right\|$	\dddtstile{abc}{def}	$\frac{def}{abc}$	\nntstile{abc}{def}	$\left\|\frac{def}{abc}\right\|$	\stdtstile{abc}{def}
$\left\|\frac{def}{abc}\right\|$	\ddststile{abc}{def}	$\frac{def}{abc}\Big\|$	\nnttstile{abc}{def}	$\left\|\frac{def}{abc}\right\|$	\stststile{abc}{def}
$\left\|\frac{def}{abc}\right\|$	\ddtstile{abc}{def}	$\frac{def}{abc}\Big\|$	\nsdtstile{abc}{def}	$\left\|\frac{def}{abc}\right\|$	\sttstile{abc}{def}
$\left\|\frac{def}{abc}\right\|$	\ddtttstile{abc}{def}	$\frac{def}{abc}\Big\|$	\nsststile{abc}{def}	$\left\|\frac{def}{abc}\right\|$	\stttstile{abc}{def}
$\left\|\frac{def}{abc}\right\|$	\dndtstile{abc}{def}	$\frac{def}{abc}$	\nststile{abc}{def}	$\left\|\frac{def}{abc}\right\|$	\tddtstile{abc}{def}
$\left\|\frac{def}{abc}\right\|$	\dnststile{abc}{def}	$\frac{def}{abc}\Big\|$	\nsttstile{abc}{def}	$\left\|\frac{def}{abc}\right\|$	\tdststile{abc}{def}
$\left\|\frac{def}{abc}\right\|$	\dntstile{abc}{def}	$\frac{def}{abc}\Big\|$	\ntdtstile{abc}{def}	$\left\|\frac{def}{abc}\right\|$	\tdtstile{abc}{def}
$\left\|\frac{def}{abc}\right\|$	\dnttstile{abc}{def}	$\frac{def}{abc}\Big\|$	\ntststile{abc}{def}	$\left\|\frac{def}{abc}\right\|$	\tdttstile{abc}{def}
$\left\|\frac{def}{abc}\right\|$	\dsdtstile{abc}{def}	$\frac{def}{abc}$	\nttstile{abc}{def}	$\left\|\frac{def}{abc}\right\|$	\tndtstile{abc}{def}
$\left\|\frac{def}{abc}\right\|$	\dsststile{abc}{def}	$\frac{def}{abc}\Big\|$	\ntttstile{abc}{def}	$\left\|\frac{def}{abc}\right\|$	\tnststile{abc}{def}
$\left\|\frac{def}{abc}\right\|$	\dststile{abc}{def}	$\left\|\frac{def}{abc}\right\|$	\sddtstile{abc}{def}	$\left\|\frac{def}{abc}\right\|$	\tntstile{abc}{def}
$\left\|\frac{def}{abc}\right\|$	\dsttstile{abc}{def}	$\left\|\frac{def}{abc}\right\|$	\sdststile{abc}{def}	$\left\|\frac{def}{abc}\right\|$	\tnttstile{abc}{def}
$\left\|\frac{def}{abc}\right\|$	\dtdtstile{abc}{def}	$\left\|\frac{def}{abc}\right\|$	\sdtstile{abc}{def}	$\left\|\frac{def}{abc}\right\|$	\tsdtstile{abc}{def}
$\left\|\frac{def}{abc}\right\|$	\dtststile{abc}{def}	$\left\|\frac{def}{abc}\right\|$	\sdttstile{abc}{def}	$\left\|\frac{def}{abc}\right\|$	\tsststile{abc}{def}

(continued on next page)

(continued from previous page)

$\Vdash\!\!\!

TABLE 83: colonequals Binary Relations

$\approx:$	`\approxcolon`	$::-$	`\coloncolonminus`	$=::$	`\equalscoloncolon`
$\approx::$	`\approxcoloncolon`	$::\sim$	`\coloncolonsim`	$-:$	`\minuscolon`
$:\approx$	`\colonapprox`	$:=$	`\colonequals`	$-::$	`\minuscoloncolon`
$::$	`\coloncolon`	$:-$	`\colonminus`	$:$	`\ratio`
$::\approx$	`\coloncolonapprox`	$:\sim$	`\colonsim`	$\sim:$	`\simcolon`
$::=$	`\coloncolonequals`	$=:$	`\equalscolon`	$\sim::$	`\simcoloncolon`

TABLE 84: fourier Binary Relations

$\nparallelslant$	`\nparallelslant`	$\parallelslant$	`\parallelslant`

TABLE 85: Subset and Superset Relations

$\sqsubset$	`\sqsubset`*	$\sqsupseteq$	`\sqsupseteq`	$\supset$	`\supset`
$\sqsubseteq$	`\sqsubseteq`	$\subset$	`\subset`	$\supseteq$	`\supseteq`
$\sqsupset$	`\sqsupset`*	$\subseteq$	`\subseteq`		

* Not predefined in LaTeX 2_ε. Use one of the packages latexsym, amsfonts, amssymb, mathabx, txfonts, pxfonts, or wasysym.

TABLE 86: $\mathcal{AMS}$ Subset and Superset Relations

$\nsubseteq$	`\nsubseteq`	$\subseteqq$	`\subseteqq`	$\supsetneqq$	`\supsetneqq`
$\nsupseteq$	`\nsupseteq`	$\subsetneq$	`\subsetneq`	$\varsubsetneq$	`\varsubsetneq`
$\nsupseteqq$	`\nsupseteqq`	$\subsetneqq$	`\subsetneqq`	$\varsubsetneqq$	`\varsubsetneqq`
$\sqsubset$	`\sqsubset`	$\Supset$	`\Supset`	$\varsupsetneq$	`\varsupsetneq`
$\sqsupset$	`\sqsupset`	$\supseteqq$	`\supseteqq`	$\varsupsetneqq$	`\varsupsetneqq`
$\Subset$	`\Subset`	$\supsetneq$	`\supsetneq`		

TABLE 87: stmaryrd Subset and Superset Relations

$\subsetplus$	`\subsetplus`	$\supsetplus$	`\supsetplus`
$\subsetpluseq$	`\subsetpluseq`	$\supsetpluseq$	`\supsetpluseq`

TABLE 88: wasysym Subset and Superset Relations

$\sqsubset$	`\sqsubset`	$\sqsupset$	`\sqsupset`

TABLE 89: txfonts/pxfonts Subset and Superset Relations

$\nsqsubset$	`\nsqsubset`	$\nsqsupseteq$	`\nsqsupseteq`	$\nSupset$	`\nSupset`
$\nsqsubseteq$	`\nsqsubseteq`	$\nSubset$	`\nSubset`		
$\nsqsupset$	`\nsqsupset`	$\nsubseteqq$	`\nsubseteqq`		

Table 90: mathabx Subset and Superset Relations

⋤	\nsqsubset	⋣	\nsupset	⋥	\sqsupseteq	⋦	\supseteq
⋦̸	\nsqSubset	⋣̸	\nSupset	⋥̸	\sqsupseteqq	⋦̸	\supseteqq
⋢	\nsqsubseteq	⋢	\nsupseteq	⋨	\sqsupsetneq	⋨	\supsetneq
⋢̸	\nsqsubseteqq	⋢̸	\nsupseteqq	⋨̸	\sqsupsetneqq	⋨̸	\supsetneqq
⋣	\nsqsupset	⊏	\sqsubset	⊂	\subset	⊊	\varsqsubsetneq
⋣̸	\nsqSupset	⊏̸	\sqSubset	⋐	\Subset	⊊̸	\varsqsubsetneqq
⋢	\nsqsupseteq	⊑	\sqsubseteq	⊆	\subseteq	⊋	\varsqsupsetneq
⋢̸	\nsqsupseteqq	⋢	\sqsubseteqq	⊈	\subseteqq	⊋̸	\varsqsupsetneqq
⊄	\nsubset	⊊	\sqsubsetneq	⊊	\subsetneq	⊊	\varsubsetneq
⊄̸	\nSubset	⊊̸	\sqsubsetneqq	⊊̸	\subsetneqq	⊊̸	\varsubsetneqq
⊈	\nsubseteq	⋑	\sqSupset	⊃	\supset	⊋	\varsupsetneq
⊈̸	\nsubseteqq	⊐	\sqsupset	⋑	\Supset	⊋̸	\varsupsetneqq

Table 91: MnSymbol Subset and Superset Relations

⊈	\nSqsubset	⊈	\nsubseteq	⊊	\sqsubsetneq	⊆	\subseteq
⊄	\nsqsubset	⊈̸	\nsubseteqq	⊊̸	\sqsubsetneqq	⊈	\subseteqq
⊈	\nsqsubseteq	⊉	\nSupset	⊐	\Sqsupset	⊊	\subsetneq
⊈̸	\nsqsubseteqq	⊅	\nsupset	⊐	\sqsupset	⊊̸	\subsetneqq
⊉	\nSqsupset	⊉	\nsupseteq	⊒	\sqsupseteq	⊃	\Supset
⊅	\nsqsupset	⊉̸	\nsupseteqq	⊒	\sqsupseteqq	⊃	\supset
⊉	\nsqsupseteq	⊏	\Sqsubset	⊋	\sqsupsetneq	⊇	\supseteq
⊉̸	\nsqsupseteqq	⊏	\sqsubset	⊋̸	\sqsupsetneqq	⊇	\supseteqq
⊄	\nSubset	⊑	\sqsubseteq	⋐	\Subset	⊋	\supsetneq
⊄	\nsubset	⊑	\sqsubseteqq	⊂	\subset	⊋̸	\supsetneqq

MnSymbol additionally defines \varsubsetneq as a synonym for \subsetneq, \varsubsetneqq as a synonym for \subsetneqq, \varsupsetneq as a synonym for \supsetneq, and \varsupsetneqq as a synonym for \supsetneqq.

Table 92: Inequalities

≥	\geq	≫	\gg	≤	\leq	≪	\ll	≠	\neq

TABLE 93: $\mathcal{AMS}$ Inequalities

$\geqslant$	\eqslantgtr	$\gtrdot$	\gtrdot	$\lesseqgtr$	\lesseqgtr	$\ngeq$	\ngeq
$\leqslant$	\eqslantless	$\gtreqless$	\gtreqless	$\lesseqqgtr$	\lesseqqgtr	$\ngeqq$	\ngeqq
$\geqq$	\geqq	$\gtreqqless$	\gtreqqless	$\lessgtr$	\lessgtr	$\ngeqslant$	\ngeqslant
$\geqslant$	\geqslant	$\gtrless$	\gtrless	$\lesssim$	\lesssim	$\ngtr$	\ngtr
$\ggg$	\ggg	$\gtrsim$	\gtrsim	$\lll$	\lll	$\nleq$	\nleq
$\gnapprox$	\gnapprox	$\gvertneqq$	\gvertneqq	$\lnapprox$	\lnapprox	$\nleqq$	\nleqq
$\gneq$	\gneq	$\leqq$	\leqq	$\lneq$	\lneq	$\nleqslant$	\nleqslant
$\gneqq$	\gneqq	$\leqslant$	\leqslant	$\lneqq$	\lneqq	$\nless$	\nless
$\gnsim$	\gnsim	$\lessapprox$	\lessapprox	$\lnsim$	\lnsim		
$\gtrapprox$	\gtrapprox	$\lessdot$	\lessdot	$\lvertneqq$	\lvertneqq		

TABLE 94: wasysym Inequalities

$\gtrsim$	\apprge	$\lesssim$	\apprle

TABLE 95: txfonts/pxfonts Inequalities

$\ngg$	\ngg	$\ngtrsim$	\ngtrsim	$\nlesssim$	\nlesssim
$\ngtrapprox$	\ngtrapprox	$\nlessapprox$	\nlessapprox	$\nll$	\nll
$\ngtrless$	\ngtrless	$\nlessgtr$	\nlessgtr		

TABLE 96: mathabx Inequalities

$\geqslant$	`\eqslantgtr`	$\gtreqless$	`\gtreqless`	$\lesssim$	`\lesssim`	$\ngtr$	`\ngtr`
$\leqslant$	`\eqslantless`	$\gtreqqless$	`\gtreqqless`	$\ll$	`\ll`	$\ngtrapprox$	`\ngtrapprox`
$\geqslant$	`\geq`	$\gtrless$	`\gtrless`	$\lll$	`\lll`	$\ngtrsim$	`\ngtrsim`
$\geqq$	`\geqq`	$\gtrsim$	`\gtrsim`	$\lnapprox$	`\lnapprox`	$\nleq$	`\nleq`
$\gg$	`\gg`	$\gvertneqq$	`\gvertneqq`	$\lneq$	`\lneq`	$\nleqq$	`\nleqq`
$\ggg$	`\ggg`	$\leqslant$	`\leq`	$\lneqq$	`\lneqq`	$\nless$	`\nless`
$\gnapprox$	`\gnapprox`	$\leqq$	`\leqq`	$\lnsim$	`\lnsim`	$\nlessapprox$	`\nlessapprox`
$\gneq$	`\gneq`	$\lessapprox$	`\lessapprox`	$\lvertneqq$	`\lvertneqq`	$\nlesssim$	`\nlesssim`
$\gneqq$	`\gneqq`	$\lessdot$	`\lessdot`	$\neqslantgtr$	`\neqslantgtr`	$\nvargeq$	`\nvargeq`
$\gnsim$	`\gnsim`	$\lesseqgtr$	`\lesseqgtr`	$\neqslantless$	`\neqslantless`	$\nvarleq$	`\nvarleq`
$\gtrapprox$	`\gtrapprox`	$\lesseqqgtr$	`\lesseqqgtr`	$\ngeq$	`\ngeq`	$\geq$	`\vargeq`
$\gtrdot$	`\gtrdot`	$\lessgtr$	`\lessgtr`	$\ngeqq$	`\ngeqq`	$\leq$	`\varleq`

mathabx defines `\leqslant` and `\le` as synonyms for `\leq`, `\geqslant` and `\ge` as synonyms for `\geq`, `\nleqslant` as a synonym for `\nleq`, and `\ngeqslant` as a synonym for `\ngeq`.

TABLE 97: MnSymbol Inequalities

$\geqslant$	\eqslantgtr	$\gtreqqless$	\gtreqqless	$\lesssim$	\lesssim	$\ngtreqless$	\ngtreqless
$\leqslant$	\eqslantless	$\gtrless$	\gtrless	$\ll$	\ll	$\ngtreqlessslant$	\ngtreqlessslant
$\geq$	\geq	$\gtrneqqless$	\gtrneqqless	$\lll$	\lll	$\ngtreqqless$	\ngtreqqless
$\trianglerighteq$	\geqclosed	$\gtrsim$	\gtrsim	$\lnapprox$	\lnapprox	$\ngtrless$	\ngtrless
$\geqslant$	\geqdot	$\leq$	\leq	$\lneqq$	\lneqq	$\nleq$	\nleq
$\geqq$	\geqq	$\trianglelefteq$	\leqclosed	$\lnsim$	\lnsim	$\nleqclosed$	\nleqclosed
$\geqslant$	\geqslant	$\leqslant$	\leqdot	$\neqslantgtr$	\neqslantgtr	$\nleqdot$	\nleqdot
$\geqslant$	\geqslantdot	$\leqq$	\leqq	$\neqslantless$	\neqslantless	$\nleqq$	\nleqq
$\gg$	\gg	$\leqslant$	\leqslant	$\ngeq$	\ngeq	$\nleqslant$	\nleqslant
$\ggg$	\ggg	$\leqslant$	\leqslantdot	$\ngeqclosed$	\ngeqclosed	$\nleqslantdot$	\nleqslantdot
$\gnapprox$	\gnapprox	$<$	\less	$\ngeqdot$	\ngeqdot	$\nless$	\nless
$\gneqq$	\gneqq	$\lessapprox$	\lessapprox	$\ngeqq$	\ngeqq	$\nlessclosed$	\nlessclosed
$\gnsim$	\gnsim	$\lessclosed$	\lessclosed	$\ngeqslant$	\ngeqslant	$\nlessdot$	\nlessdot
$>$	\gtr	$\lessdot$	\lessdot	$\ngeqslantdot$	\ngeqslantdot	$\nlesseqgtr$	\nlesseqgtr
$\gtrapprox$	\gtrapprox	$\lesseqgtr$	\lesseqgtr	$\ngg$	\ngg	$\nlesseqgtrslant$	\nlesseqgtrslant
$\trianglerighteq$	\gtrclosed	$\lesseqgtrslant$	\lesseqgtrslant	$\nggg$	\nggg	$\nlesseqqgtr$	\nlesseqqgtr
$\gtrdot$	\gtrdot	$\lesseqqgtr$	\lesseqqgtr	$\ngtr$	\ngtr	$\nlessgtr$	\nlessgtr
$\gtreqless$	\gtreqless	$\lessgtr$	\lessgtr	$\ngtrclosed$	\ngtrclosed	$\nll$	\nll
$\gtreqlessslant$	\gtreqlessslant	$\lessneqqgtr$	\lessneqqgtr	$\ngtrdot$	\ngtrdot	$\nlll$	\nlll

MnSymbol additionally defines synonyms for some of the preceding symbols:

$\ggg$	\gggtr	(same as \ggg)
$\gneqq$	\gvertneqq	(same as \gneqq)
$\lhd$	\lhd	(same as \lessclosed)
$\lll$	\llless	(same as \lll)
$\lneqq$	\lvertneqq	(same as \lneqq)
$\ntrianglelefteq$	\ntrianglelefteq	(same as \nleqclosed)
$\ntriangleleft$	\ntriangleleft	(same as \nlessclosed)
$\ntrianglerighteq$	\ntrianglerighteq	(same as \ngeqclosed)
$\ntriangleright$	\ntriangleright	(same as \ngtrclosed)
$\rhd$	\rhd	(same as \gtrclosed)
$\trianglelefteq$	\trianglelefteq	(same as \leqclosed)
$\trianglerighteq$	\trianglerighteq	(same as \geqclosed)
$\unlhd$	\unlhd	(same as \leqclosed)
$\unrhd$	\unrhd	(same as \geqclosed)
$\vartriangleleft$	\vartriangleleft	(same as \lessclosed)
$\vartriangleright$	\vartriangleright	(same as \gtrclosed)

TABLE 98: $\mathcal{AMS}$ Triangle Relations

◀	\blacktriangleleft	⋪	\ntriangleright	⊵	\trianglerighteq
▶	\blacktriangleright	⋫	\ntrianglerighteq	◁	\vartriangleleft
⋪	\ntriangleleft	⊴	\trianglelefteq	▷	\vartriangleright
⋬	\ntrianglelefteq	≜	\triangleq		

TABLE 99: stmaryrd Triangle Relations

⧏	\trianglelefteqslant	⧐	\trianglerighteqslant
⧏̸	\ntrianglelefteqslant	⧐̸	\ntrianglerighteqslant

TABLE 100: mathabx Triangle Relations

⋪	\ntriangleleft	⋭	\ntrianglerighteq	▷	\triangleright	▷	\vartriangleright
⋬	\ntrianglelefteq	◁	\triangleleft	⩥	\trianglerighteq		
⊁	\ntriangleright	⩤	\trianglelefteq	◁	\vartriangleleft		

TABLE 101: MnSymbol Triangle Relations

▼	\filledmedtriangledown	△	\largetriangleup	▿	\smalltriangledown
◀	\filledmedtriangleleft	▽	\medtriangledown	◃	\smalltriangleleft
▶	\filledmedtriangleright	◁	\medtriangleleft	▹	\smalltriangleright
▲	\filledmedtriangleup	▷	\medtriangleright	▵	\smalltriangleup
▾	\filledtriangledown	△	\medtriangleup	≜	\triangleeq
◂	\filledtriangleleft	≠	\ntriangleeq	⊴	\trianglelefteq
▸	\filledtriangleright	⋪	\ntriangleleft	⊵	\trianglerighteq
▴	\filledtriangleup	⋬	\ntrianglelefteq	◁	\vartriangleleft
▽	\largetriangledown	⋫	\ntriangleright	▷	\vartriangleright
◁	\largetriangleleft	⋭	\ntrianglerighteq		
▷	\largetriangleright	⟁	\otriangle		

MnSymbol additionally defines synonyms for many of the preceding symbols: \triangleq is a synonym for \triangleeq; \lhd and \lessclosed are synonyms for \vartriangleleft; \rhd and \gtrclosed are synonyms for \vartriangleright; \unlhd and \leqclosed are synonyms for \trianglelefteq; \unrhd and \geqclosed are synonyms for \trianglerighteq; \blacktriangledown, \blacktriangleleft, \blacktriangleright, and \blacktriangle [*sic*] are synonyms for, respectively, \filledmedtriangledown, \filledmedtriangleleft, \filledmedtriangleright, and \filledmedtriangleup; \triangleright is a synonym for \medtriangleright; \triangle, \vartriangle, and \bigtriangleup are synonyms for \medtriangleup; \triangleleft is a synonym for \medtriangleleft; \triangledown and \bigtriangledown are synonyms for \medtriangledown; \nlessclosed is a synonym for \ntriangleleft; \ngtrclosed is a synonym for \ntriangleright; \nleqclosed is a synonym for \ntrianglelefteq; and \ngeqclosed is a synonym for \ntrianglerighteq.

The title "Triangle Relations" is a bit of a misnomer here as only \triangleeq and \ntriangleeq are defined as TEX relations (class 3 symbols). The \largetriangle... symbols are defined as TEX "ordinary" characters (class 0) and all of the remaining characters are defined as TEX binary operators (class 2).

TABLE 102: Arrows

⇓	\Downarrow	⟵	\longleftarrow	↖	\nwarrow
↓	\downarrow	⟸	\Longleftarrow	⇒	\Rightarrow
↩	\hookleftarrow	⟷	\longleftrightarrow	→	\rightarrow
↪	\hookrightarrow	⟺	\Longleftrightarrow	↘	\searrow
⇝	\leadsto*	⟼	\longmapsto	↙	\swarrow
←	\leftarrow	⟹	\Longrightarrow	↑	\uparrow
⇐	\Leftarrow	⟶	\longrightarrow	⇑	\Uparrow
⇔	\Leftrightarrow	↦	\mapsto	↕	\updownarrow
↔	\leftrightarrow	↗	\nearrow†	⇕	\Updownarrow

* Not predefined in LATEX 2_ε. Use one of the packages latexsym, amsfonts, amssymb, txfonts, pxfonts, or wasysym.

† See the note beneath Table 169 for information about how to put a diagonal arrow across a mathematical expression (as in "$\nabla \cdot \overset{0}{\nearrow} B$ ") .

Table 103: Harpoons

↼	\leftharpoondown	⇁	\rightharpoondown	⇌	\rightleftharpoons
↽	\leftharpoonup	⇀	\rightharpoonup		

Table 104: textcomp Text-mode Arrows

↓	\textdownarrow	→	\textrightarrow
←	\textleftarrow	↑	\textuparrow

Table 105: $\mathcal{AMS}$ Arrows

↺	\circlearrowleft	⇇	\leftleftarrows	⇄	\rightleftarrows
↻	\circlearrowright	⇆	\leftrightarrows	⇉	\rightrightarrows
↶	\curvearrowleft	↭	\leftrightsquigarrow	⇝	\rightsquigarrow
↷	\curvearrowright	⇚	\Lleftarrow	↱	\Rsh
⇠	\dashleftarrow	↫	\looparrowleft	↞	\twoheadleftarrow
⇢	\dashrightarrow	↬	\looparrowright	↠	\twoheadrightarrow
⇊	\downdownarrows	↰	\Lsh	↑↑	\upuparrows
↢	\leftarrowtail	↣	\rightarrowtail		

Table 106: $\mathcal{AMS}$ Negated Arrows

⇍	\nLeftarrow	⇎	\nLeftrightarrow	⇏	\nRightarrow
↚	\nleftarrow	↮	\nleftrightarrow	↛	\nrightarrow

Table 107: $\mathcal{AMS}$ Harpoons

⇃	\downharpoonleft	⥋	\leftrightharpoons	↿	\upharpoonleft
⇂	\downharpoonright	⇌	\rightleftharpoons	↾	\upharpoonright

Table 108: stmaryrd Arrows

⇽	\leftarrowtriangle	⇐|	\Mapsfrom	←	\shortleftarrow
⥈	\leftrightarrowtriangle	↤	\mapsfrom	→	\shortrightarrow
⇿	\leftrightarrowtriangle	⇨|	\Mapsto	↑	\shortuparrow
↯	\lightning	↗	\nnearrow	↘	\ssearrow
⟸|	\Longmapsfrom	↖	\nnwarrow	↙	\sswarrow
⟻	\longmapsfrom	⇾	\rightarrowtriangle		
⟹|	\Longmapsto	↓	\shortdownarrow		

TABLE 109: txfonts/pxfonts Arrows

⇦⊡	\boxdotLeft	⊙→	\circleddotright	↩◇	\Diamondleft
←⊡	\boxdotleft	←○	\circleleft	◇→	\Diamondright
⊡→	\boxdotright	○→	\circleright	◇⇨	\DiamondRight
⊡⇨	\boxdotRight	⇠	\dashleftrightarrow	⇜	\leftsquigarrow
⇦□	\boxLeft	⇦◇	\DiamonddotLeft	⇗	\Nearrow
←□	\boxleft	←◇	\Diamonddotleft	⇖	\Nwarrow
□→	\boxright	◇→	\Diamonddotright	⇛	\Rrightarrow
□⇨	\boxRight	◇⇨	\DiamonddotRight	⇘	\Searrow
←⊙	\circleddotleft	⇦◇	\DiamondLeft	⇙	\Swarrow

TABLE 110: mathabx Arrows

↺	\circlearrowleft	←	\leftarrow	↖	\nwarrow
↻	\circlearrowright	⇇	\leftleftarrows	↾	\restriction
↜	\curvearrowbotleft	↔	\leftrightarrow	→	\rightarrow
↭	\curvearrowbotleftright	⇆	\leftrightarrows	⇄	\rightleftarrows
⇂	\curvearrowbotright	↭	\leftrightsquigarrow	⇉	\rightrightarrows
↶	\curvearrowleft	↜	\leftsquigarrow	⇝	\rightsquigarrow
↷	\curvearrowleftright	↺	\lefttorightarrow	↩	\righttoleftarrow
↷	\curvearrowright	↫	\looparrowdownleft	↱	\Rsh
↲	\dlsh	↬	\looparrowdownright	↘	\searrow
⇊	\downdownarrows	↫	\looparrowleft	↙	\swarrow
↺	\downtouparrow	↬	\looparrowright	↑↓	\updownarrows
↓↑	\downuparrows	↰	\Lsh	↺	\uptodownarrow
↳	\drsh	↗	\nearrow	↑↑	\upuparrows

TABLE 111: mathabx Negated Arrows

⇍	\nLeftarrow	↮	\nleftrightarrow	↛	\nrightarrow
↚	\nleftarrow	⇎	\nLeftrightarrow	⇏	\nRightarrow

TABLE 112: mathabx Harpoons

⥎	\barleftharpoon	↼	\leftharpoonup	⇌	\rightleftharpoons
⥏	\barrightharpoon	⇇	\leftleftharpoons	⇒	\rightrightharpoons
⇊	\downdownharpoons	↽	\leftrightharpoon	⥮	\updownharpoons
⇃	\downharpoonleft	⇋	\leftrightharpoons	↿	\upharpoonleft
⇂	\downharpoonright	⥊	\rightbarharpoon	↾	\upharpoonright
⥯	\downupharpoons	⇁	\rightharpoondown	⇈	\upupharpoons
⥋	\leftbarharpoon	⇀	\rightharpoonup		
↽	\leftharpoondown	⇀	\rightleftharpoon		

TABLE 113: MnSymbol Arrows

⤵	\curvearrowdownup	⟵	\longleftarrow	↙	\rhookswarrow
↭	\curvearrowleftright	⟸	\Longleftarrow	↾	\rhookuparrow
↶	\curvearrownesw	⟷	\longleftrightarrow	→	\rightarrow
↷	\curvearrownwse	⟺	\Longleftrightarrow	⇒	\Rightarrow
↬	\curvearrowrightleft	⟼	\longmapsto	⤖	\rightarrowtail
↷	\curvearrowsenw	⟶	\longrightarrow	⇄	\rightleftarrows
↶	\curvearrowswne	⟹	\Longrightarrow	⇝	\rightlsquigarrow
↭	\curvearrowupdown	↫	\looparrowleft	↦	\rightmapsto
⇣	\dasheddownarrow	↬	\looparrowright	⇉	\rightrightarrows
⇠	\dashedleftarrow	↰	\Lsh	⇝	\rightrsquigarrow
⇗	\dashednearrow	↗	\nearrow	⤇	\Rrightarrow
⇖	\dashednwarrow	⇗	\Nearrow	↱	\Rsh
⇢	\dashedrightarrow	↗	\nearrowtail	↘	\searrow
⇘	\dashedsearrow	↗	\nelsquigarrow	⇘	\Searrow
⇙	\dashedswarrow	⤤	\nemapsto	↘	\searrowtail
⇡	\dasheduparrow	⇗	\nenearrows	↘	\selsquigarrow
⇓	\Downarrow	↗	\nersquigarrow	↘	\semapsto
↓	\downarrow	↙	\neswarrow	⇘	\senwarrows
↡	\downarrowtail	⇙	\Neswarrow	↘	\sersquigarrow
⇊	\downdownarrows	⇙	\neswarrows	⇘	\sesearrows
⇂	\downlsquigarrow	↖	\nwarrow	↯	\squigarrowdownup
↧	\downmapsto	⇖	\Nwarrow	↭	\squigarrowleftright
⇂	\downrsquigarrow	↖	\nwarrowtail	↭	\squigarrownesw
⇵	\downuparrows	↖	\nwlsquigarrow	↯	\squigarrownwse
◌⃕	\lcirclearrowdown	↖	\nwmapsto	↬	\squigarrowrightleft
◌⃔	\lcirclearrowleft	⇖	\nwnwarrows	↯	\squigarrowsenw
◌⃕	\lcirclearrowright	↖	\nwrsquigarrow	↬	\squigarrowswne
◌⃔	\lcirclearrowup	↖	\nwsearrow	↯	\squigarrowupdown
⤵	\lcurvearrowdown	⇖	\Nwsearrow	↙	\swarrow
↜	\lcurvearrowleft	⇖	\nwsearrows	⇙	\Swarrow
↷	\lcurvearrowne	⟲	\partialvardlcircleleftint*	↙	\swarrowtail
↶	\lcurvearrownw	⟳	\partialvardlcirclerightint*	↙	\swlsquigarrow
↝	\lcurvearrowright	⟲	\partialvardrcircleleftint*	↙	\swmapsto
↷	\lcurvearrowse	⟳	\partialvardrcirclerightint*	⇙	\swnearrows
↶	\lcurvearrowsw	○	\partialvartlcircleleftint*	↙	\swrsquigarrow
↶	\lcurvearrowup	○	\partialvartlcirclerightint*	⇙	\swswarrows
⇐	\Leftarrow	○	\partialvartrcircleleftint*	↡	\twoheaddownarrow
←	\leftarrow	○	\partialvartrcirclerightint*	↞	\twoheadleftarrow
↢	\leftarrowtail	◌⃕	\rcirclearrowdown	↗	\twoheadnearrow
⇇	\leftleftarrows	◌⃔	\rcirclearrowleft	↖	\twoheadnwarrow
↜	\leftlsquigarrow	◌⃕	\rcirclearrowright	↠	\twoheadrightarrow
↤	\leftmapsto	◌⃔	\rcirclearrowup	↘	\twoheadsearrow
↔	\leftrightarrow	⤵	\rcurvearrowdown	↙	\twoheadswarrow
⇔	\Leftrightarrow	↜	\rcurvearrowleft	↟	\twoheaduparrow
⇆	\leftrightarrows	↷	\rcurvearrowne	↑	\uparrow
↜	\leftrsquigarrow	↶	\rcurvearrownw	⇑	\Uparrow
⇃	\lhookdownarrow	↝	\rcurvearrowright	↥	\uparrowtail

(continued on next page)

(continued from previous page)

↩	\lhookleftarrow	⤷	\rcurvearrowse	↕	\updownarrow
↗	\lhooknearrow	↶	\rcurvearrowsw	⇕	\Updownarrow
↖	\lhooknwarrow	↷	\rcurvearrowup	⇅	\updownarrows
↪	\lhookrightarrow	⇂	\rhookdownarrow	↾	\uplsquigarrow
↘	\lhooksearrow	↩	\rhookleftarrow	↥	\upmapsto
↙	\lhookswarrow	↗	\rhooknearrow	⇂	\uprsquigarrow
⇡	\lhookuparrow	↖	\rhooknwarrow	⇈	\upuparrows
↯	\lightning	↪	\rhookrightarrow		
⇐	\Lleftarrow	↘	\rhooksearrow		

MnSymbol additionally defines synonyms for some of the preceding symbols:

↻	\circlearrowleft	(same as \rcirclearrowup)
↺	\circlearrowright	(same as \lcirclearrowup)
↶	\curvearrowleft	(same as \rcurvearrowleft)
↷	\curvearrowright	(same as \lcurvearrowright)
⇠	\dashleftarrow	(same as \dashedleftarrow)
⇢	\dashrightarrow	(same as \dashedrightarrow)
↩	\hookleftarrow	(same as \rhookleftarrow)
↪	\hookrightarrow	(same as \lhookrightarrow)
⇝	\leadsto	(same as \rightlsquigarrow)
↭	\leftrightsquigarrow	(same as \squigarrowleftright)
↦	\mapsto	(same as \rightmapsto)
⇝	\rightsquigarrow	(same as \rightlsquigarrow)

* The \partialvar...int macros are intended to be used internally by MnSymbol to produce various types of integrals.

Table 114: MnSymbol Negated Arrows

↭	\ncurvearrowdownup	↚	\nlhooknwarrow	⇄	\nrightleftarrows
↭	\ncurvearrowleftright	↛	\nlhookrightarrow	⇝	\nrightlsquigarrow
↭	\ncurvearrownesw	↚	\nlhooksearrow	↦	\nrightmapsto
↭	\ncurvearrownwse	↙	\nlhookswarrow	⇉	\nrightrightarrows
↭	\ncurvearrowrightleft	↟	\nlhookuparrow	⇝	\nrightrsquigarrow
↭	\ncurvearrowsenw	⇍	\nLleftarrow	⇏	\nRrightarrow
↭	\ncurvearrowswne	↗	\nnearrow	↘	\nSearrow
↭	\ncurvearrowupdown	↗	\nNearrow	↘	\nsearrow
⇣	\ndasheddownarrow	↗	\nnearrowtail	↘	\nsearrowtail
⇠	\ndashedleftarrow	↗	\nnelsquigarrow	↘	\nselsquigarrow
↗	\ndashednearrow	↗	\nnemapsto	↘	\nsemapsto
↖	\ndashednwarrow	↗	\nnenearrows	↘	\nsenwarrows
⇢	\ndashedrightarrow	↗	\nnersquigarrow	↘	\nsersquigarrow
↘	\ndashedsearrow	↗	\nNeswarrow	↘	\nsesearrows

(continued on next page)

(continued from previous page)

⇙	\ndashedswarrow	⇗	\nneswarrow	⇅	\nsquigarrowdownup
⇡	\ndasheduparrow	⇗	\nneswarrows	⇎	\nsquigarrowleftright
⇣	\ndownarrow	⇖	\nNwarrow	⇎	\nsquigarrownesw
⇓	\nDownarrow	⇖	\nnwarrow	⇵	\nsquigarrownwse
⇣	\ndownarrowtail	⇖	\nnwarrowtail	⇗	\nsquigarrowrightleft
⇊	\ndowndownarrows	⇖	\nnwlsquigarrow	⇅	\nsquigarrowsenw
⇂	\ndownlsquigarrow	⇖	\nnwmapsto	⇗	\nsquigarrowswne
⇣	\ndownmapsto	⇖	\nnwnwarrows	⇕	\nsquigarrowupdown
⇂	\ndownrsquigarrow	⇖	\nnwrsquigarrow	⇙	\nswarrow
⇵	\ndownuparrows	⇘	\nnwsearrow	⇙	\nSwarrow
⟲	\nlcirclearrowdown	⇘	\nNwsearrow	⇙	\nswarrowtail
⟲	\nlcirclearrowleft	⇘	\nnwsearrows	⇂	\nswlsquigarrow
⟳	\nlcirclearrowright	⟳	\nrcirclearrowdown	⇙	\nswmapsto
⟳	\nlcirclearrowup	⟲	\nrcirclearrowleft	⇙	\nswnearrows
↴	\nlcurvearrowdown	⟳	\nrcirclearrowright	⇃	\nswrsquigarrow
↰	\nlcurvearrowleft	⟳	\nrcirclearrowup	⇙	\nswswarrows
↱	\nlcurvearrowne	↳	\nrcurvearrowdown	↡	\ntwoheaddownarrow
↰	\nlcurvearrownw	↰	\nrcurvearrowleft	↞	\ntwoheadleftarrow
↱	\nlcurvearrowright	↱	\nrcurvearrowne	↗	\ntwoheadnearrow
↘	\nlcurvearrowse	↰	\nrcurvearrownw	↖	\ntwoheadnwarrow
↲	\nlcurvearrowsw	↱	\nrcurvearrowright	↠	\ntwoheadrightarrow
↾	\nlcurvearrowup	↳	\nrcurvearrowse	↘	\ntwoheadsearrow
⇍	\nLeftarrow	↲	\nrcurvearrowsw	↙	\ntwoheadswarrow
↚	\nleftarrow	↾	\nrcurvearrowup	↟	\ntwoheaduparrow
↞	\nleftarrowtail	↡	\nrhookdownarrow	↑	\nuparrow
⇇	\nleftleftarrows	↚	\nrhookleftarrow	⇑	\nUparrow
↜	\nleftlsquigarrow	↗	\nrhooknearrow	↟	\nuparrowtail
↚	\nleftmapsto	↖	\nrhooknwarrow	↕	\nupdownarrow
↮	\nleftrightarrow	↛	\nrhookrightarrow	⇕	\nUpdownarrow
⇎	\nLeftrightarrow	↘	\nrhooksearrow	⇅	\nupdownarrows
↭	\nleftrightarrows	↙	\nrhookswarrow	↿	\nuplsquigarrow
↜	\nleftrsquigarrow	↟	\nrhookuparrow	↥	\nupmapsto
↡	\nlhookdownarrow	↛	\nrightarrow	↾	\nuprsquigarrow
↚	\nlhookleftarrow	⇏	\nRightarrow	⇈	\nupuparrows
↗	\nlhooknearrow	↠	\nrightarrowtail		

MnSymbol additionally defines synonyms for some of the preceding symbols:

⃖	\ncirclearrowleft	(same as \nrcirclearrowup)
⃗	\ncirclearrowright	(same as \nlcirclearrowup)
↶̸	\ncurvearrowleft	(same as \nrcurvearrowleft)
↷̸	\ncurvearrowright	(same as \nlcurvearrowright)
-⇢	\ndasharrow	(same as \ndashedrightarrow)
⇠-	\ndashleftarrow	(same as \ndashedleftarrow)
-⇢	\ndashrightarrow	(same as \ndashedrightarrow)
↚	\ngets	(same as \nleftarrow)
↚	\nhookleftarrow	(same as \nrhookleftarrow)
↛	\nhookrightarrow	(same as \nlhookrightarrow)
⇝̸	\nleadsto	(same as \nrightlsquigarrow)
⇜̸⇝̸	\nleftrightsquigarrow	(same as \nsquigarrowleftright)
↦̸	\nmapsto	(same as \nrightmapsto)
⇝̸	\nrightsquigarrow	(same as \nrightlsquigarrow)
↛	\nto	(same as \nrightarrow)

TABLE 115: MnSymbol Harpoons

↽	\downharpoonccw*	⤯	\neswharpoons	↘	\seharpooncw
⇂	\downharpooncw*	⥊	\neswharpoonsenw	⥋	\senwharpoons
⥥	\downupharpoons	↖	\nwharpoonccw	↙	\swharpoonccw
↼	\leftharpoonccw*	↖	\nwharpooncw	↙	\swharpooncw
↼	\leftharpooncw*	⤡	\nwseharpoonnesw	⥊	\swneharpoons
⥊	\leftrightharpoondownup	⤧	\nwseharpoons	↕	\updownharpoonleftright
⇋	\leftrightharpoons	⤡	\nwseharpoonswne	↕	\updownharpoonrightleft
⥎	\leftrightharpoonupdown	⇀	\rightharpoonccw*	⥮	\updownharpoons
↗	\neharpoonccw	⇀	\rightharpooncw*	↑	\upharpoonccw*
↗	\neharpooncw	⇌	\rightleftharpoons	↾	\upharpooncw*
⤢	\neswharpoonnwse	↘	\seharpoonccw		

* Where marked, the "ccw" suffix can be replaced with "up" and the "cw" suffix can be replaced with "down". (In addition, \upharpooncw can be written as \restriction.)

TABLE 116: MnSymbol Negated Harpoons

↽̸	\ndownharpoonccw*	⤯̸	\nneswharpoons	↘̸	\nseharpooncw
⇂̸	\ndownharpooncw*	⥊̸	\nneswharpoonsenw	⥋̸	\nsenwharpoons
⥥̸	\ndownupharpoons	↖̸	\nnwharpoonccw	↙̸	\nswharpoonccw
↼̸	\nleftharpoonccw*	↖̸	\nnwharpooncw	↙̸	\nswharpooncw
↼̸	\nleftharpooncw*	⤡̸	\nnwseharpoonnesw	⥊̸	\nswneharpoons
⥊̸	\nleftrightharpoondownup	⤧̸	\nnwseharpoons	↕̸	\nupdownharpoonleftright
⇋̸	\nleftrightharpoons	⤡̸	\nnwseharpoonswne	↕̸	\nupdownharpoonrightleft
⥎̸	\nleftrightharpoonupdown	⇀̸	\nrightharpoonccw*	⥮̸	\nupdownharpoons
↗̸	\nneharpoonccw	⇀̸	\nrightharpooncw*	↑̸	\nupharpoonccw*
↗̸	\nneharpooncw	⇌̸	\nrightleftharpoons	↾̸	\nupharpooncw*
⤢̸	\nneswharpoonnwse	↘̸	\nseharpoonccw		

* Where marked, the "ccw" suffix can be replaced with "up" and the "cw" suffix can be replaced with "down". (In addition, \nupharpooncw can be written as \nrestriction.)

Table 117: harpoon Extensible Harpoons

$\overleftharp{abc}$	\overleftharp{abc}	$\overrightharpdown{abc}$	\overrightharpdown{abc}	$\underrightharp{abc}$	\underrightharp{abc}
$\overleftharpdown{abc}$	\overleftharpdown{abc}	$\underleftharp{abc}$	\underleftharp{abc}	$\underrightharpdown{abc}$	\underrightharpdown{abc}
$\overrightharp{abc}$	\overrightharp{abc}	$\underleftharpdown{abc}$	\underleftharpdown{abc}		

All of the harpoon symbols are implemented using the graphics package (specifically, graphics's \resizebox command). Consequently, only TEX backends that support graphical transformations (e.g., *not* Xdvi) can properly display these symbols.

Table 118: chemarrow Arrows

→	\chemarrow

Table 119: fge Arrows

⇻	\fgerightarrow	⇞	\fgeuparrow

Table 120: MnSymbol Spoons

⇂	\downfilledspoon	⇗	\nnespoon	⇖	\nwfilledspoon
⇃	\downspoon	⇖	\nnwfilledspoon	↖	\nwspoon
↼	\leftfilledspoon	↖	\nnwspoon	⇀	\rightfilledspoon
↽	\leftspoon	⇀	\nrightfilledspoon	⇁	\rightspoon*
⇃	\ndownfilledspoon	⇁	\nrightspoon*	↘	\sefilledspoon
⇂	\ndownspoon	↘	\nsefilledspoon	↘	\sespoon
↗	\nefilledspoon	↘	\nsespoon	↙	\swfilledspoon
↗	\nespoon	↙	\nswfilledspoon	↙	\swspoon
⇀	\nleftfilledspoon	↙	\nswspoon	↑	\upfilledspoon
↽	\nleftspoon	↑	\nupfilledspoon	↑	\upspoon
⇗	\nnefilledspoon	↑	\nupspoon		

* MnSymbol defines \multimap as a synonym for \rightspoon and \nmultimap as a synonym for \nrightspoon.

Table 121: MnSymbol Pitchforks

⫛	\downpitchfork	⤫	\nnwpitchfork	⫐	\rightpitchfork
⫞	\leftpitchfork	⫐	\nrightpitchfork	⤡	\sepitchfork
⫛	\ndownpitchfork	⤡	\nsepitchfork	⤢	\swpitchfork
⤤	\nepitchfork	⤢	\nswpitchfork	⫫	\uppitchfork
⫟	\nleftpitchfork	⫫	\nuppitchfork		
⤤	\nnepitchfork	⤫	\nwpitchfork		

* MnSymbol defines \pitchfork as a synonym for \uppitchfork and \npitchfork as a synonym for \nuppitchfork.

Table 122: MnSymbol Smiles and Frowns

⩒	\doublefrown	⋦	\nsmileeq	≃	\smileeq
⩔	\doublefrowneq	⋧	\nsmileeqfrown	⋍	\smileeqfrown
⋓	\doublesmile	≴	\nsmilefrown	≍	\smilefrown
⋗	\doublesmileeq	≵	\nsmilefrowneq	≏	\smilefrowneq
⋍	\eqfrown	⩓	\nsqdoublefrown	⩓	\sqdoublefrown
⊂	\eqsmile	⩕	\nsqdoublefrowneq	⩕	\sqdoublefrowneq
⌢	\frown	⪩	\nsqdoublesmile	⪩	\sqdoublesmile
⌓	\frowneq	⪫	\nsqdoublesmileeq	⪫	\sqdoublesmileeq
⊜	\frowneqsmile	≠	\nsqeqfrown	⋍	\sqeqfrown
⌣	\frownsmile	≠	\nsqeqsmile	⊂	\sqeqsmile
≘	\frownsmileeq	⌢	\nsqfrown	⌢	\sqfrown
⩓	\ndoublefrown	⌓	\nsqfrowneq	⌓	\sqfrowneq
⩕	\ndoublefrowneq	⊜	\nsqfrowneqsmile	⊜	\sqfrowneqsmile
⪩	\ndoublesmile	⌣	\nsqfrownsmile	⌣	\sqfrownsmile
⪫	\ndoublesmileeq	⌣	\nsqsmile	⌣	\sqsmile
≠	\neqfrown	≄	\nsqsmileeq	≃	\sqsmileeq
≠	\neqsmile	⋍	\nsqsmileeqfrown	⋍	\sqsmileeqfrown
⌢	\nfrown	≍	\nsqsmilefrown	≍	\sqsmilefrown
⌓	\nfrowneq	⩔	\nsqtriplefrown	⩔	\sqtriplefrown
⊜	\nfrowneqsmile	⩖	\nsqtriplesmile	⩖	\sqtriplesmile
⌣	\nfrownsmile	⩔	\ntriplefrown	⩔	\triplefrown
⌣	\nfrownsmileeq	⩖	\ntriplesmile	⩖	\triplesmile
⌣	\nsmile	⌣	\smile		

* MnSymbol defines \smallsmile as a synonym for \smile, \smallfrown as a synonym for \frown, \asymp as a synonym for \smilefrown, and \nasymp as a synonym for \nsmilefrown.

Table 123: ulsy Contradiction Symbols

↯	\blitza	↯	\blitzb	↯	\blitzc	↯	\blitzd	↯	\blitze

Table 124: Extension Characters

–	\relbar	=	\Relbar

Table 125: stmaryrd Extension Characters

⫽	\Arrownot	⫮	\Mapsfromchar	⫯	\Mapstochar
⫻	\arrownot	⫰	\mapsfromchar		

Table 126: txfonts/pxfonts Extension Characters

⫯	\Mappedfromchar	⫲	\Mmappedfromchar	⫳	\Mmapstochar
⫰	\mappedfromchar	⫱	\mmappedfromchar	⫲	\mmapstochar

TABLE 127: mathabx Extension Characters

	\mapsfromchar		\mapstochar
	\Mapsfromchar		\Mapstochar

TABLE 128: Log-like Symbols

\arccos	\cos	\csc	\exp	\ker	\limsup	\min	\sinh
\arcsin	\cosh	\deg	\gcd	\lg	\ln	\Pr	\sup
\arctan	\cot	\det	\hom	\lim	\log	\sec	\tan
\arg	\coth	\dim	\inf	\liminf	\max	\sin	\tanh

Calling the above "symbols" may be a bit misleading.[3] Each log-like symbol merely produces the eponymous textual equivalent, but with proper surrounding spacing. See Section 8.4 for more information about log-like symbols. As \bmod and \pmod are arguably not symbols we refer the reader to the Short Math Guide for LaTeX [Dow00] for samples.

TABLE 129: $\mathcal{AMS}$ Log-like Symbols

inj lim	\injlim	$\varinjlim$	\varinjlim	$\varlimsup$	\varlimsup
proj lim	\projlim	$\varliminf$	\varliminf	$\varprojlim$	\varprojlim

Load the amsmath package to get these symbols. See Section 8.4 for some additional comments regarding log-like symbols. As \mod and \pod are arguably not symbols we refer the reader to the Short Math Guide for LaTeX [Dow00] for samples.

TABLE 130: GiNA2e Number Sets

$\mathbb{C}$	\Complex	$\mathbb{Z}$	\Integer	$\mathbb{N}$	\Natural	$\mathbb{Q}$	\Rational	$\mathbb{R}$	\Real
$\mathbb{C}$	\COMPLEX	$\mathbb{Z}$	\INTEGER	$\mathbb{N}$	\NATURAL	$\mathbb{Q}$	\RATIONAL	$\mathbb{R}$	\REAL

[3] Michael J. Downes prefers the more general term, "atomic math objects".

Table 131: Greek Letters

α	\alpha	θ	\theta	o	o	τ	\tau
β	\beta	ϑ	\vartheta	π	\pi	υ	\upsilon
γ	\gamma	ι	\iota	ϖ	\varpi	ϕ	\phi
δ	\delta	κ	\kappa	ρ	\rho	φ	\varphi
ϵ	\epsilon	λ	\lambda	ϱ	\varrho	χ	\chi
ε	\varepsilon	μ	\mu	σ	\sigma	ψ	\psi
ζ	\zeta	ν	\nu	ς	\varsigma	ω	\omega
η	\eta	ξ	\xi				
Γ	\Gamma	Λ	\Lambda	Σ	\Sigma	Ψ	\Psi
Δ	\Delta	Ξ	\Xi	Υ	\Upsilon	Ω	\Omega
Θ	\Theta	Π	\Pi	Φ	\Phi		

The remaining Greek majuscules can be produced with ordinary Latin letters. The symbol "M", for instance, is used for both an uppercase "m" and an uppercase "μ".

See Section 8.5 for examples of how to produce bold Greek letters.

The symbols in this table are intended to be used in mathematical typesetting. Greek body text can be typeset using the babel package's greek (or polutonikogreek) option—and, of course, a font that provides the glyphs for the Greek alphabet.

Table 132: $\mathcal{AMS}$ Greek Letters

$\digamma$	\digamma	$\varkappa$	\varkappa

Table 133: txfonts/pxfonts Upright Greek Letters

$\alphaup$	\alphaup	$\thetaup$	\thetaup	$\piup$	\piup	$\phiup$	\phiup
$\betaup$	\betaup	$\varthetaup$	\varthetaup	$\varpiup$	\varpiup	$\varphiup$	\varphiup
$\gammaup$	\gammaup	$\iotaup$	\iotaup	$\rhoup$	\rhoup	$\chiup$	\chiup
$\deltaup$	\deltaup	$\kappaup$	\kappaup	$\varrhoup$	\varrhoup	$\psiup$	\psiup
$\epsilonup$	\epsilonup	$\lambdaup$	\lambdaup	$\sigmaup$	\sigmaup	$\omegaup$	\omegaup
$\varepsilonup$	\varepsilonup	$\muup$	\muup	$\varsigmaup$	\varsigmaup		
$\zetaup$	\zetaup	$\nuup$	\nuup	$\tauup$	\tauup		
$\etaup$	\etaup	$\xiup$	\xiup	$\upsilonup$	\upsilonup		

Table 134: upgreek Upright Greek Letters

$\upalpha$	\upalpha	$\uptheta$	\uptheta	$\uppi$	\uppi	$\upphi$	\upphi
$\upbeta$	\upbeta	$\upvartheta$	\upvartheta	$\upvarpi$	\upvarpi	$\upvarphi$	\upvarphi
$\upgamma$	\upgamma	$\upiota$	\upiota	$\uprho$	\uprho	$\upchi$	\upchi
$\updelta$	\updelta	$\upkappa$	\upkappa	$\upvarrho$	\upvarrho	$\uppsi$	\uppsi
$\upepsilon$	\upepsilon	$\uplambda$	\uplambda	$\upsigma$	\upsigma	$\upomega$	\upomega
$\upvarepsilon$	\upvarepsilon	$\upmu$	\upmu	$\upvarsigma$			
$\upzeta$	\upzeta	$\upnu$	\upnu	$\uptau$			
$\upeta$	\upeta	$\upxi$	\upxi	$\upupsilon$	\upupsilon		
$\Upgamma$	\Upgamma	$\Uplambda$	\Uplambda	$\Upsigma$	\Upsigma	$\Uppsi$	\Uppsi
$\Updelta$	\Updelta	$\Upxi$	\Upxi	$\Upupsilon$	\Upupsilon	$\Upomega$	\Upomega
$\Uptheta$	\Uptheta	$\Uppi$	\Uppi	$\Upphi$	\Upphi		

upgreek utilizes upright Greek characters from either the PostScript Symbol font (depicted above) or Euler Roman. As a result, the glyphs may appear slightly different from the above. Contrast, for example, "$\Gamma\Delta\Theta\alpha\beta\gamma$" (Symbol) with "$\Gamma\Delta\Theta\alpha\beta\gamma$" (Euler).

Table 135: fourier Variant Greek Letters

π	\pi	ρ	\rho
ϖ	\varpi	ϱ	\varrho
ϖ	\varvarpi	ϱ	\varvarrho

Table 136: txfonts/pxfonts Variant Latin Letters

g	\varg	v	\varv	w	\varw	y	\vary

Pass the varg option to txfonts/pxfonts to replace g, v, w, and y with g, v, w, and y in every mathematical expression in your document.

Table 137: $\mathcal{AMS}$ Hebrew Letters

ב	\beth	ג	\gimel	ד	\daleth

\aleph (א) appears in Table 201 on page 73.

Table 138: MnSymbol Hebrew Letters

א	\aleph	ב	\beth	ג	\gimel	ד	\daleth

Table 139: Letter-like Symbols

$\bot$	`\bot`	$\forall$	`\forall`	$\imath$	`\imath`	$\ni$	`\ni`	$\top$	`\top`
ℓ	`\ell`	$\hbar$	`\hbar`	$\in$	`\in`	∂	`\partial`	$\wp$	`\wp`
$\exists$	`\exists`	$\Im$	`\Im`	$\jmath$	`\jmath`	$\Re$	`\Re`		

Table 140: $\mathcal{AMS}$ Letter-like Symbols

$\Bbbk$	`\Bbbk`	$\complement$	`\complement`	$\hbar$	`\hbar`
®	`\circledR`	$\Finv$	`\Finv`	$\hslash$	`\hslash`
Ⓢ	`\circledS`	$\Game$	`\Game`	$\nexists$	`\nexists`

Table 141: txfonts/pxfonts Letter-like Symbols

¢	`\mathcent`	£	`\mathsterling`*	$\notin$	`\notin`	$\notni$	`\notni`

* It's generally preferable to use the corresponding symbol from Table 3 on page 10 because the symbols in that table work properly in both text mode and math mode.

Table 142: mathabx Letter-like Symbols

$\bar{\in}$	`\barin`	$\in$	`\in`	$\not\top$	`\nottop`	$\notin$	`\varnotin`
$\complement$	`\complement`	$\nexists$	`\nexists`	$\ni$	`\owns`	$\notni$	`\varnotowner`
$\exists$	`\exists`	$\not\bot$	`\notbot`	$\owns$	`\ownsbar`		
$\Finv$	`\Finv`	$\notin$	`\notin`	∂	`\partial`		
$\Game$	`\Game`	$\notni$	`\notowner`	$\not\partial$	`\partialslash`		

Table 143: MnSymbol Letter-like Symbols

$\bot$	`\bot`	$\in$	`\in`	$\notni$	`\nowns`*	$\top$	`\top`
$\exists$	`\exists`	$\nexists$	`\nexists`	$\ni$	`\owns`	$\wp$	`\wp`
$\forall$	`\forall`	$\notin$	`\nin`*	$\wp$	`\powerset`		

* MnSymbol provides synonyms `\notin` for `\nin`, `\ni` for `\owns`, and `\intercal` for `\top`.

Table 144: trfsigns Letter-like Symbols

e	`\e`	j	`\im`

TABLE 145: mathdesign Letter-like Symbols

$\in$	\in	$\ni$	\owns
$\notin$	\notin	$\in$	\smallin
$\notin$	\notsmallin	$\ni$	\smallowns
$\not\ni$	\notsmallowns		

The mathdesign package additionally provides versions of each of the letter-like symbols shown in Table 140 on the previous page.

TABLE 146: fge Letter-like Symbols

$\mathbb{V}$	\fgeA	$\mathfrak{g}$	\fgeeszett	$\mathbb{B}$	\fgeleftB	$\mathfrak{U}$	\fgeU
$\mathfrak{z}$	\fgec	$\mathcal{H}$	\fgeF	$\mathbb{C}$	\fgeleftC		
$\mathcal{p}$	\fged	$\mathcal{f}$	\fgef	$\mathbb{B}$	\fgerightB		
$\mathfrak{d}$	\fgee	$\mathfrak{p}$	\fgelb*	$\mathfrak{f}$	\fges		

* The fge package defines \fgeeta, \fgeN, and \fgeoverU as synonyms for \fgelb.

TABLE 147: fourier Letter-like Symbols

∂	\partial
∂	\varpartialdiff

TABLE 148: $\mathcal{AMS}$ Delimiters

⌜	\ulcorner	⌝	\urcorner
⌞	\llcorner	⌟	\lrcorner

TABLE 149: stmaryrd Delimiters

⦉	\Lbag	⦊	\Rbag	⦉	\lbag	⦊	\rbag
⌈⌈	\llceil	⌉⌉	\rrceil	⌊⌊	\llfloor	⌋⌋	\rrfloor
⦇	\llparenthesis	⦈	\rrparenthesis				

TABLE 150: mathabx Delimiters

⌜ ⌞	\lcorners	⌝ ⌟	\rcorners
⌜	\ulcorner	⌝	\urcorner
⌞	\llcorner	⌟	\lrcorner

TABLE 151: nath Delimiters

⌞	\niv	⌟	\vin

Table 152: Variable-sized Delimiters

$\downarrow$	$\left\downarrow\right.$	`\downarrow`	$\Downarrow$	$\left\Downarrow\right.$	`\Downarrow`	[	$\left[\right.$	`[`	]	$\left.\right]$	`]`
$\langle$	$\left\langle\right.$	`\langle`	$\rangle$	$\left.\right\rangle$	`\rangle`	|	$\left\vert\right.$	`|`	$\Vert$	$\left.\right\Vert$	`|`
$\lceil$	$\left\lceil\right.$	`\lceil`	$\rceil$	$\left.\right\rceil$	`\rceil`	$\uparrow$	$\left\uparrow\right.$	`\uparrow`	$\Uparrow$	$\left\Uparrow\right.$	`\Uparrow`
$\lfloor$	$\left\lfloor\right.$	`\lfloor`	$\rfloor$	$\left.\right\rfloor$	`\rfloor`	$\updownarrow$	$\left\updownarrow\right.$	`\updownarrow`	$\Updownarrow$	$\left\Updownarrow\right.$	`\Updownarrow`
(	$\left(\right.$	`(`	)	$\left.\right)$	`)`	{	$\left\{\right.$	`\{`	}	$\left.\right\}$	`\}`
/	$\left/\right.$	`/`	\	$\left\backslash\right.$	`\backslash`						

When used with `\left` and `\right`, these symbols expand to the height of the enclosed math expression. Note that `\vert` is a synonym for `|`, and `\Vert` is a synonym for `\|`.

ε-TEX provides a `\middle` analogue to `\left` and `\right`. `\middle` can be used, for example, to make an internal "|" expand to the height of the surrounding `\left` and `\right` symbols. (This capability is commonly needed when typesetting adjacent bras and kets in Dirac notation: "$\langle\phi|\psi\rangle$"). A similar effect can be achieved in conventional LATEX using the braket package.

Table 153: Large, Variable-sized Delimiters

$\int$	$\left\int\right.$	`\lmoustache`	$\left.\right\}$	$\left.\right\rmoustache$	`\rmoustache`	$\left(\right.$	$\left\lgroup\right.$	`\lgroup`	$\left.\right)$	$\left.\right\rgroup$	`\rgroup`
|	$\left\vert\right.$	`\arrowvert`	$\Vert$	$\left\Vert\right.$	`\Arrowvert`	$\left\vert\right.$	$\left\vert\right.$	`\bracevert`			

These symbols *must* be used with `\left` and `\right`. The mathabx package, however, redefines `\lgroup` and `\rgroup` so that those symbols can work without `\left` and `\right`.

Table 154: $\mathcal{AMS}$ Variable-sized Delimiters

|	$\left\vert\right.$	`\lvert`	|	$\left.\right\vert$	`\rvert`
$\Vert$	$\left\Vert\right.$	`\lVert`	$\Vert$	$\left.\right\Vert$	`\rVert`

According to the amsmath documentation [AMS99], the preceding symbols are intended to be used as delimiters (e.g., as in "$|-z|$") while the `\vert` and `\Vert` symbols (Table 152) are intended to be used as operators (e.g., as in "$p|q$").

Table 155: stmaryrd Variable-sized Delimiters

⟦	⟦	\llbracket	⟧	⟧	\rrbracket

Table 156: mathabx Variable-sized Delimiters

⟦	⟦	\ldbrack	⟧	⟧	\rdbrack
❲	❲	\lfilet	❳	❳	\rfilet
∣	∣	\thickvert	⦀	⦀	\vvvert

Table 157: MnSymbol Variable-sized Delimiters

⌈	⌈	\lceil	⌉	⌉	\rceil
⌊	⌊	\lfloor	⌋	⌋	\rfloor
⦘	⦘	\lwavy	⦘	⦘	\rwavy
⦚	⦚	\lWavy	⦚	⦚	\rWavy
(	(	(	)	)	)
⟦	⟦	\lsem	⟧	⟧	\rsem
∫	∫	\lmoustache	⎫	⎫	\rmoustache
/	/	/	\	\	\backslash
⌜	⌜	\ulcorner	⌝	⌝	\urcorner
⌞	⌞	\llcorner	⌟	⌟	\lrcorner
⟨	⟨	\langle	⟩	⟩	\rangle
⧼	⧼	\langlebar	⧽	⧽	\ranglebar
(	(	\lgroup	)	)	\rgroup
⟪	⟪	\llangle	⟫	⟫	\rrangle
{	{	\lbrace	}	}	\rbrace
⟨	⟨	<	⟩	⟩	>

(continued on next page)

(continued from previous page)

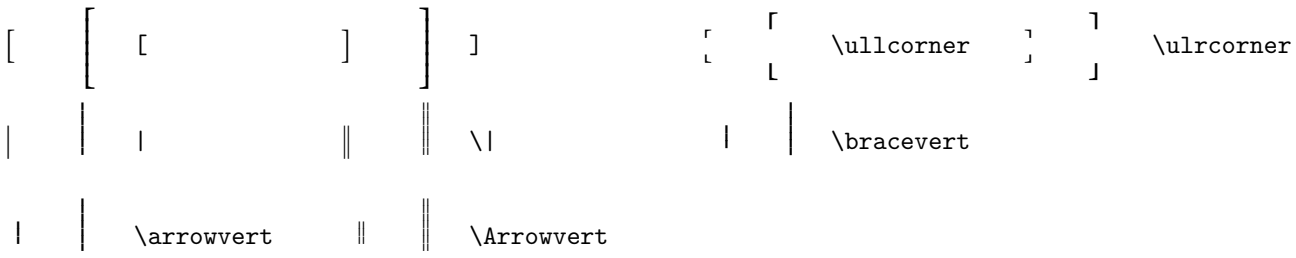

`\vert` is a synonym for `|`. `\Vert` is a synonym for `\|`. `\mid` and `\mvert` produce the same symbol as `\vert` but designated as math relations instead of ordinals. `\divides` produces the same symbol as `\vert` but designated as a binary operator instead of an ordinal. `\parallel` and `\mVert` produce the same symbol as `\Vert` but designated as math relations instead of ordinals.

TABLE 158: mathdesign Variable-sized Delimiters

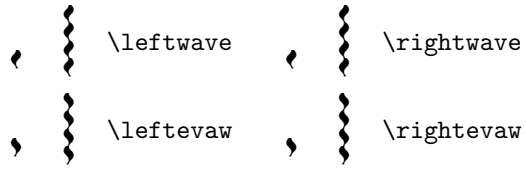

The definitions of these symbols include a preceding `\left` or `\right`. It is therefore an error to specify `\left` or `\right` explicitly. The internal, "primitive" versions of these symbols are called `\lwave`, `\rwave`, `\levaw`, and `\revaw`.

TABLE 159: nath Variable-sized Delimiters (Double)

⟪	⟪	\lAngle	⟫	⟫	\rAngle
⟦	⟦	\lBrack	⟧	⟧	\rBrack
⌈	⌈	\lCeil	⌉	⌉	\rCeil
⌊	⌊	\lFloor	⌋	⌋	\rFloor
‖	‖	\lVert*	‖	‖	\rVert*

* nath redefines all of the above to include implicit `\left` and `\right` commands. Hence, separate `\lVert` and `\rVert` commands are needed to disambiguate whether "|" is a left or right delimiter.

All of the symbols in Table 159 can also be expressed using the `\double` macro. See the nath documentation for examples and additional information.

TABLE 160: nath Variable-sized Delimiters (Triple)

⟪⟪	⟪⟪	\triple<	⟫⟫	⟫⟫	\triple>
⟦⟦	⟦⟦	\triple[	⟧⟧	⟧⟧	\triple]
⦀	⦀	\ltriple|*	⦀	⦀	\rtriple|*

* Similar to `\lVert` and `\rVert` in Table 159, `\ltriple` and `\rtriple` must be used instead of `\triple` to disambiguate whether "|" is a left or right delimiter.

Note that `\triple`—and the corresponding `\double`—is actually a macro that takes a delimiter as an argument.

TABLE 161: fourier Variable-sized Delimiters

⟦	⟦	\llbracket	⟧	⟧	\rrbracket
⦀	⦀	\VERT			

TABLE 162: textcomp Text-mode Delimiters

⟨	`\textlangle`	⟩	`\textrangle`
⟦	`\textlbrackdbl`	⟧	`\textrbrackdbl`
⦃	`\textlquill`	⦄	`\textrquill`

TABLE 163: metre Text-mode Delimiters

⦄	`\alad`	⦃	`\Alad`	†	`\crux`	‡	`\Crux`
⦃	`\alas`	⦄	`\Alas`	⟧	`\quadrad`	⟧	`\Quadrad`
⟩	`\angud`	⟩	`\Angud`	⟦	`\quadras`	⟦	`\Quadras`
⟨	`\angus`	⟨	`\Angus`				

TABLE 164: Math-mode Accents

$\acute{a}$	`\acute{a}`	$\check{a}$	`\check{a}`	$\grave{a}$	`\grave{a}`	$\tilde{a}$	`\tilde{a}`
$\bar{a}$	`\bar{a}`	$\ddot{a}$	`\ddot{a}`	$\hat{a}$	`\hat{a}`	$\vec{a}$	`\vec{a}`
$\breve{a}$	`\breve{a}`	$\dot{a}$	`\dot{a}`	$\mathring{a}$	`\mathring{a}`		

Also note the existence of `\imath` and `\jmath`, which produce dotless versions of "$\imath$" and "$\jmath$". (See Table 201 on page 73.) These are useful when the accent is supposed to replace the dot. For example, "`\hat{\imath}`" produces a correct "$\hat{\imath}$", while "`\hat{i}`" would yield the rather odd-looking "$\hat{i}$".

TABLE 165: $\mathcal{AMS}$ Math-mode Accents

$\dddot{a}$	`\dddot{a}`	$\ddddot{a}$	`\ddddot{a}`

These accents are also provided by the mathabx and accents packages and are redefined by the mathdots package if the amsmath and amssymb packages have previously been loaded. All of the variations except for the original $\mathcal{AMS}$ ones tighten the space between the dots (from $\dddot{a}$ to $\ddot{a}$). The mathabx and mathdots versions also function properly within subscripts and superscripts ($x^{\ddot{a}}$ instead of $x^{\dddot{a}}$) .

TABLE 166: MnSymbol Math-mode Accents

$\vec{a}$	`\vec{a}`

TABLE 167: fge Math-mode Accents

Å̊å	`\spirituslenis{A}\spirituslenis{a}`*

* When fge is passed the crescent option, `\spirituslenis` instead uses a crescent accent as in "å".

TABLE 168: yhmath Math-mode Accents

$\mathring{a}$	`\ring{a}`

This symbol is largely obsolete, as standard LaTeX 2_ε has supported `\mathring` since June, 1998 [LaT98].

TABLE 169: Extensible Accents

$\widetilde{abc}$	`\widetilde{abc}`*	$\widehat{abc}$	`\widehat{abc}`*
$\overleftarrow{abc}$	`\overleftarrow{abc}`†	$\overrightarrow{abc}$	`\overrightarrow{abc}`†
$\overline{abc}$	`\overline{abc}`	$\underline{abc}$	`\underline{abc}`
$\overbrace{abc}$	`\overbrace{abc}`	$\underbrace{abc}$	`\underbrace{abc}`
$\sqrt{abc}$	`\sqrt{abc}`‡		

As demonstrated in a 1997 TUGboat article about typesetting long-division problems [Gib97], an extensible long-division sign ("$)\overline{abc}$") can be faked by putting a "`\big)`" in a `tabular` environment with an `\hline` or `\cline` in the preceding row. The article also presents a piece of code (uploaded to CTAN as `longdiv.tex`) that automatically solves and typesets—by putting an `\overline` atop "`\big)`" and the desired text—long-division problems. See also the polynom package, which automatically solves and typesets polynomial-division problems in a similar manner.

* These symbols are made more extensible by the MnSymbol package and even more extensible by the yhmath package.

† If you're looking for an extensible *diagonal* line or arrow to be used for canceling or reducing mathematical subexpressions (e.g., "$x + \cancel{-x}$" or "$3 + \cancel{2}^{5}$") then consider using the cancel package.

‡ With an optional argument, `\sqrt` typesets nth roots. For example, "`\sqrt[3]{abc}`" produces "$\sqrt[3]{abc}$" and "`\sqrt[n]{abc}`" produces "$\sqrt[n]{abc}$".

TABLE 170: overrightarrow Extensible Accents

$\overRightarrow{abc}$	`\Overrightarrow{abc}`

TABLE 171: yhmath Extensible Accents

$\wideparen{abc}$	`\wideparen{abc}`	$\widetriangle{abc}$	`\widetriangle{abc}`
$\mathring{\widehat{abc}}$	`\widering{abc}`		

TABLE 172: $\mathcal{AMS}$ Extensible Accents

$\overleftrightarrow{abc}$	`\overleftrightarrow{abc}`	$\underleftrightarrow{abc}$	`\underleftrightarrow{abc}`
$\underleftarrow{abc}$	`\underleftarrow{abc}`	$\underrightarrow{abc}$	`\underrightarrow{abc}`

TABLE 173: MnSymbol Extensible Accents

$\overbrace{abc}$	`\overbrace{abc}`	$\underbrace{abc}$	`\underbrace{abc}`
$\overgroup{abc}$	`\overgroup{abc}`	$\undergroup{abc}$	`\undergroup{abc}`
$\overlinesegment{abc}$	`\overlinesegment{abc}`	$\underlinesegment{abc}$	`\underlinesegment{abc}`
$\overleftharpoon{abc}$	`\overleftharpoon{abc}`	$\overrightharpoon{abc}$	`\overrightharpoon{abc}`
$\widehat{abc}$	`\widehat{abc}`	$\widetilde{abc}$	`\widetilde{abc}`
$\wideparen{abc}$	`\wideparen{abc}`		

TABLE 174: mathtools Extensible Accents

$\overbrace{abc}$	`\overbrace{abc}`	$\underbrace{abc}$	`\underbrace{abc}`
$\overbracket{abc}$	`\overbracket{abc}`*	$\underbracket{abc}$	`\underbracket{abc}`*

* `\overbracket` and `\underbracket` accept optional arguments that specify the bracket height and thickness. See the mathtools documentation for more information.

TABLE 175: mathabx Extensible Accents

$\overbrace{abc}$	`\overbrace{abc}`	$\widebar{abc}$	`\widebar{abc}`
$\overgroup{abc}$	`\overgroup{abc}`	$\widecheck{abc}$	`\widecheck{abc}`
$\underbrace{abc}$	`\underbrace{abc}`	$\wideparen{abc}$	`\wideparen{abc}`
$\undergroup{abc}$	`\undergroup{abc}`	$\widering{abc}$	`\widering{abc}`
$\widearrow{abc}$	`\widearrow{abc}`		

The braces shown for `\overbrace` and `\underbrace` appear in their minimum size. They can expand arbitrarily wide, however.

TABLE 176: fourier Extensible Accents

$\widearc{abc}$	`\widearc{abc}`	$\wideparen{abc}$	`\wideparen{abc}`
$\wideOarc{abc}$	`\wideOarc{abc}`	$\widering{abc}$	`\widering{abc}`

TABLE 177: esvect Extensible Accents

$\vv{abc}$	`\vv{abc}` with package option `a`
$\vv{abc}$	`\vv{abc}` with package option `b`
$\vv{abc}$	`\vv{abc}` with package option `c`
$\vv{abc}$	`\vv{abc}` with package option `d`
$\vv{abc}$	`\vv{abc}` with package option `e`
$\vv{abc}$	`\vv{abc}` with package option `f`
$\vv{abc}$	`\vv{abc}` with package option `g`
$\vv{abc}$	`\vv{abc}` with package option `h`

esvect also defines a `\vv*` macro which is used to typeset arrows over vector variables with subscripts. See the esvect documentation for more information.

TABLE 178: undertilde Extensible Accents

$\utilde{abc}$	`\utilde{abc}`

Because `\utilde` is based on `\widetilde` it is also made more extensible by the yhmath package.

TABLE 179: ushort Extensible Accents

$\ushortdw{abc}$	`\ushortdw{abc}`	$\ushortw{abc}$	`\ushortw{abc}`

`\ushortw` and `\ushortdw` are intended to be used with multi-character arguments ("words") while `\ushort`and `\ushortd` are intended to be used with single-character arguments.

The underlines produced by the ushort commands are shorter than those produced by the `\underline` command. Consider the output from the expression "`\ushort{x} \ushort{y}\underline{x}\underline{y}`", which looks like "$\ushort{x}\ushort{y}\underline{x}\underline{y}$".

TABLE 180: $\mathcal{AMS}$ Extensible Arrows

$\xleftarrow{abc}$	`\xleftarrow{abc}`	$\xrightarrow{abc}$	`\xrightarrow{abc}`

TABLE 181: mathtools Extensible Arrows

$\xhookleftarrow{abc}$	`\xhookleftarrow{abc}`	$\xleftrightharpoons{abc}$	`\xleftrightharpoons{abc}`
$\xhookrightarrow{abc}$	`\xhookrightarrow{abc}`	$\xmapsto{abc}$	`\xmapsto{abc}`
$\xLeftarrow{abc}$	`\xLeftarrow{abc}`	$\xRightarrow{abc}$	`\xRightarrow{abc}`
$\xleftharpoondown{abc}$	`\xleftharpoondown{abc}`	$\xrightharpoondown{abc}$	`\xrightharpoondown{abc}`
$\xleftharpoonup{abc}$	`\xleftharpoonup{abc}`	$\xrightharpoonup{abc}$	`\xrightharpoonup{abc}`
$\xleftrightarrow{abc}$	`\xleftrightarrow{abc}`	$\xrightleftharpoons{abc}$	`\xrightleftharpoons{abc}`
$\xLeftrightarrow{abc}$	`\xLeftrightarrow{abc}`		

TABLE 182: chemarr Extensible Arrows

$\xrightleftharpoons{abc}$	`\xrightleftharpoons{abc}`

TABLE 183: chemarrow Extensible Arrows

$\xleftarrow[def]{abc}$	`\autoleftarrow{abc}{def}`	$\xrightarrow[def]{abc}$	`\autorightarrow{abc}{def}`
$\xleftrightharpoons[def]{abc}$	`\autoleftrightharpoons{abc}{def}`	$\xrightleftharpoons[def]{abc}$	`\autorightleftharpoons{abc}{def}`

In addition to the symbols shown above, chemarrow also provides `\larrowfill`, `\rarrowfill`, `\leftrightharpoonsfill`, and `\rightleftharpoonsfill` macros. Each of these takes a length argument and produces an arrow of the specified length.

TABLE 184: extarrows Extensible Arrows

$\xLeftrightarrow{abc}$	`\xLeftrightarrow{abc}`	$\xLongleftrightarrow{abc}$	`\xLongleftrightarrow{abc}`
$\xleftrightarrow{abc}$	`\xleftrightarrow{abc}`	$\xlongleftrightarrow{abc}$	`\xlongleftrightarrow{abc}`
$\xlongequal{abc}$	`\xlongequal{abc}`	$\xLongrightarrow{abc}$	`\xLongrightarrow{abc}`
$\xLongleftarrow{abc}$	`\xLongleftarrow{abc}`	$\xlongrightarrow{abc}$	`\xlongrightarrow{abc}`
$\xlongleftarrow{abc}$	`\xlongleftarrow{abc}`		

TABLE 185: extpfeil Extensible Arrows

$\xlongequal{abc}$	`\xlongequal{abc}`	$\xmapsto{abc}$	`\xmapsto{abc}`
$\xtwoheadleftarrow{abc}$	`\xtwoheadleftarrow{abc}`	$\xtwoheadrightarrow{abc}$	`\xtwoheadrightarrow{abc}`

The extpfeil package also provides a `\newextarrow` command to help you define your own extensible arrow symbols. See the extpfeil documentation for more information.

TABLE 186: DotArrow Extensible Arrows

$\dotarrow{a}$	`\dotarrow{a}`

The DotArrow package provides mechanisms for lengthening the arrow, adjusting the distance between the arrow and its symbol, and altering the arrowhead. See the DotArrow documentation for more information.

TABLE 187: trfsigns Extensible Transform Symbols

$\dft{a}$	`\dft{a}`	$\DFT{a}$	`\DFT{a}`

TABLE 188: holtpolt Non-commutative Division Symbols

$\holter{abc}{def}$	`\holter{abc}{def}`	$\polter{abc}{def}$	`\polter{abc}{def}`

TABLE 189: Dots

$\cdotp$	`\cdotp`	:	`\colon`*	.	`\ldotp`	$\vdots$	`\vdots`†
$\cdots$	`\cdots`	$\ddots$	`\ddots`†	$\ldots$	`\ldots`		

* While ":" is valid in math mode, `\colon` uses different surrounding spacing. See Section 8.4 and the Short Math Guide for LaTeX [Dow00] for more information on math-mode spacing.

† The mathdots package redefines `\ddots` and `\vdots` to make them scale properly with font size. (They normally scale horizontally but not vertically.) `\fixedddots` and `\fixedvdots` provide the original, fixed-height functionality of LaTeX 2_ε's `\ddots` and `\vdots` macros.

Table 190: $\mathcal{AMS}$ Dots

⋱	\because*	⋯	\dotsi	∴	\therefore*
⋯	\dotsb	⋯	\dotsm		
…	\dotsc	…	\dotso		

* \because and \therefore are defined as binary relations and therefore also appear in Table 68 on page 34.

The $\mathcal{AMS}$ \dots_ symbols are named according to their intended usage: \dotsb between pairs of binary operators/relations, \dotsc between pairs of commas, \dotsi between pairs of integrals, \dotsm between pairs of multiplication signs, and \dotso between other symbol pairs.

Table 191: wasysym Dots

∴	\wasytherefore

Table 192: MnSymbol Dots

·	\cdot	⋰	\hdotdot	⋰	\udots
⋱	\ddotdot	⋯	\hdots	∴	\uptherefore
⋱	\ddots	∴	\leftthere fore	:	\vdotdot
⋰	\diamonddots	∴	\rightthere fore	⋮	\vdots
⋱	\downtherefore	::	\squaredots		
⋰	\fivedots	⋰	\udotdot		

MnSymbol defines \therefore as \uptherefore and \because as \downtherefore. Furthermore, \cdotp and \colon produce the same glyphs as \cdot and \vdotdot respectively but serve as TEX math punctuation (class 6 symbols) instead of TEX binary operators (class 2).

All of the above except \hdots and \vdots are defined as binary operators and therefore also appear in Table 50 on page 26. Also, unlike most of the other dot symbols in this document, MnSymbol's dots are defined as single characters instead of as composites of multiple single-dot characters.

Table 193: mathdots Dots

⋰	\iddots

Table 194: yhmath Dots

⋰	\adots

TABLE 195: teubner Dots

⁚	\:	⋮	\;	⁞	\?	::	\antilabe

TABLE 196: mathcomp Math Symbols

℃	\tccentigrade	Ω	\tcohm	‰	\tcperthousand
µ	\tcmu	‱	\tcpertenthousand		

TABLE 197: marvosym Digits

0	\MVZero	2	\MVTwo	4	\MVFour	6	\MVSix	8	\MVEight
1	\MVOne	3	\MVThree	5	\MVFive	7	\MVSeven	9	\MVNine

TABLE 198: fge Digits

𝟘	\fgestruckzero	𝟙	\fgestruckone

TABLE 199: dozenal Base-12 Digits

↊	\x	↋	\e

TABLE 200: mathabx Mayan Digits

𝋀	\maya{0}	⁚	\maya{2}	⁞	\maya{4}
·	\maya{1}	⋮	\maya{3}	❙	\maya{5}

TABLE 201: Miscellaneous LaTeX 2_ε Math Symbols

ℵ	\aleph	◇	\Diamond*	∞	\infty	′	\prime
∠	\angle	♢	\diamondsuit	℧	\mho*	♯	\sharp
\	\backslash	∅	\emptyset‡	∇	\nabla	♠	\spadesuit
□	\Box*,†	♭	\flat	♮	\natural	√	\surd
♣	\clubsuit	♡	\heartsuit	¬	\neg	△	\triangle

* Not predefined in LaTeX 2_ε. Use one of the packages latexsym, amsfonts, amssymb, txfonts, pxfonts, or wasysym. Note, however, that amsfonts and amssymb define \Diamond to produce the same glyph as \lozenge ("◊"); the other packages produce a squarer \Diamond as depicted above.

† To use \Box—or any other symbol—as an end-of-proof (Q.E.D.) marker, consider using the ntheorem package, which properly juxtaposes a symbol with the end of the proof text.

‡ Many people prefer the look of $\mathcal{AMS}$'s \varnothing ("∅", Table 202) to that of LaTeX's \emptyset.

TABLE 202: Miscellaneous $\mathcal{AMS}$ Math Symbols

∠	\angle	▼	\blacktriangledown	℧	\mho
∖	\backprime	╲	\diagdown	◁	\sphericalangle
★	\bigstar	╱	\diagup	□	\square
⧫	\blacklozenge	ð	\eth	▽	\triangledown
■	\blacksquare	◊	\lozenge	∅	\varnothing
▲	\blacktriangle	∡	\measuredangle	△	\vartriangle

TABLE 203: Miscellaneous wasysym Math Symbols

□	\Box	◇	\Diamond	℧	\mho*	⦟	\varangle

* wasysym also defines an \agemO symbol, which is the same glyph as \mho but is intended for use in text mode.

TABLE 204: Miscellaneous txfonts/pxfonts Math Symbols

◆	\Diamondblack	ƛ	\lambdaslash	♥	\varheartsuit
⟐	\Diamonddot	♧	\varclubsuit	♤	\varspadesuit
ƛ	\lambdabar	♦	\vardiamondsuit		

TABLE 205: Miscellaneous mathabx Math Symbols

○	\degree	⁗	\fourth	⦡	\measuredangle	″	\second
╲	\diagdown	#	\hash	⋔	\pitchfork	⦟	\sphericalangle
╱	\diagup	∞	\infty	∝	\propto	‴	\third
∅	\diameter	⋉	\leftthreetimes	⋋	\rightthreetimes	#	\varhash

Table 206: Miscellaneous MnSymbol Math Symbols

∠	\angle	♢	\diamondsuit	✠	\maltese	♯	\sharp
⌐	\backneg	♭	\flat	∡	\measuredangle	∫	\smallint
\	\backprime	♡	\heartsuit	∇	\nabla	♠	\spadesuit
✓	\checkmark	∞	\infty	♮	\natural	∢	\sphericalangle
♣	\clubsuit	⌙	\invbackneg	¬	\neg		
∅	\diameter	⌐	\invneg	′	\prime		

MnSymbol defines \emptyset and \varnothing as synonyms for \diameter; \lnot and \minushookdown as synonyms for \neg; \minushookup as a synonym for \invneg; \hookdownminus as a synonym for \backneg; and, \hookupminus as a synonym for \invbackneg.

Table 207: Miscellaneous Internal MnSymbol Math Symbols

⋯	\partialvardint	⋯	\partialvartint
⌣	\partialvardlanddownint	⌣	\partialvartlanddownint
⌢	\partialvardlandupint	⌢	\partialvartlandupint
∲	\partialvardlcircleleftint	∲	\partialvartlcircleleftint
∳	\partialvardlcirclerightint	∳	\partialvartlcirclerightint
⍜	\partialvardoiint	⍜	\partialvartoiint
○	\partialvardoint	○	\partialvartoint
∲	\partialvardrcircleleftint	∲	\partialvartrcircleleftint
∳	\partialvardrcirclerightint	∳	\partialvartrcirclerightint
⨍	\partialvardstrokedint	⨍	\partialvartstrokedint
∑	\partialvardsumint	Σ	\partialvartsumint

These symbols are intended to be used internally by MnSymbol to construct the integrals appearing in Table 64 on page 32 but can nevertheless be used in isolation.

Table 208: Miscellaneous textcomp Text-mode Math Symbols

°	\textdegree*	½	\textonehalf†	¾	\textthreequarters†
÷	\textdiv	¼	\textonequarter†	³	\textthreesuperior
/	\textfractionsolidus	¹	\textonesuperior	×	\texttimes
¬	\textlnot	±	\textpm	²	\texttwosuperior
–	\textminus	√	\textsurd		

* If you prefer a larger degree symbol you might consider defining one as "\ensuremath{^\circ}" ("°").

† nicefrac (part of the units package) or the newer xfrac package can be used to construct vulgar fractions like "1/2", "1/4", "3/4", and even "c/o".

Table 209: Miscellaneous marvosym Math Symbols

∢	\Anglesign	·	\Squaredot	⃗	\Vectorarrowhigh
≙	\Corresponds	⃗	\Vectorarrow		

TABLE 210: Miscellaneous fge Math Symbols

⧵	\fgebackslash	⩀	\fgecap	⩊	\fgecupacute	⧼	\fgelangle
⩴	\fgebaracute	⩂	\fgecapbar	⩏	\fgecupbar	⎵	\fgeupbracket
⩓	\fgebarcap	⩎	\fgecup	∾	\fgeinfty		

TABLE 211: Miscellaneous mathdesign Math Symbols

⌞	\rightangle

TABLE 212: Miscellaneous arev Math Symbols

♨	\steaming	♦	\vardiamond	♤	\varspade
♧	\varclub	♥	\varheart		

Table 213: Math Alphabets

Font sample	Generating command	Required package
ABCdef123	`\mathrm{ABCdef123}`	*none*
$ABCdef123$	`\mathit{ABCdef123}`	*none*
$ABCdef123$	`\mathnormal{ABCdef123}`	*none*
$\mathcal{ABC}$	`\mathcal{ABC}`	*none*
$\mathscr{ABC}$	`\mathscr{ABC}`	mathrsfs
or	`\mathcal{ABC}`	calrsfs
$\mathcal{ABC}$	`\mathcal{ABC}`	euscript with the mathcal option
or	`\mathscr{ABC}`	euscript with the mathscr option
$\mathpzc{ABCdef123}$	`\mathpzc{ABCdef123}`	*none*; manually defined*
$\mathbb{ABC}$	`\mathbb{ABC}`	amsfonts,§ amssymb, txfonts, or pxfonts
$\varmathbb{ABC}$	`\varmathbb{ABC}`	txfonts or pxfonts
$\mathbb{ABCdef123}$	`\mathbb{ABCdef123}`	bbold or mathbbol†
$\mathbb{ABCdef123}$	`\mathbb{ABCdef123}`	mbboard†
$\mathbbm{ABCdef12}$	`\mathbbm{ABCdef12}`	bbm
$\mathbbmss{ABCdef12}$	`\mathbbmss{ABCdef12}`	bbm
$\mathbbmtt{ABCdef12}$	`\mathbbmtt{ABCdef12}`	bbm
$\mathbb{ABC1}$	`\mathbb{ABC1}`	dsfont
$\mathbb{ABC1}$	`\mathbb{ABC1}`	dsfont with the sans option
$\mathbb{ABC}$	`\symA\symB\symC`	china2e‡
$\mathfrak{ABCdef123}$	`\mathfrak{ABCdef123}`	eufrak
$\textfrak{ABCdef123}$	`\textfrak{ABCdef123}`	yfonts¶
$\textswab{ABCdef123}$	`\textswab{ABCdef123}`	yfonts¶
$\textgoth{ABCdef123}$	`\textgoth{ABCdef123}`	yfonts¶

* Put "`\DeclareMathAlphabet{\mathpzc}{OT1}{pzc}{m}{it}`" in your document's preamble to make `\mathpzc` typeset its argument in Zapf Chancery. As a similar trick, you can typeset the Calligra font's script "$\mathscr{e}$" (or other calligraphic symbols) in math mode by loading the calligra package and putting "`\DeclareMathAlphabet{\mathcalligra}{T1}{calligra}{m}{n}`" in your document's preamble to make `\mathcalligra` typeset its argument in the Calligra font. (You may also want to specify "`\DeclareFontShape{T1}{calligra}{m}{n}{<->s*[2.2]callig15}{}`" to set Calligra at 2.2 times its design size for a better blend with typical body fonts.)

† The mathbbol package defines some additional blackboard bold characters: parentheses, square brackets, angle brackets, and—if the bbgreekl option is passed to mathbbol—Greek letters. For instance, "$\mathbb{\Langle\Lbrack\Lparen\bbalpha\bbbeta\bbgamma\Rparen\Rbrack\Rangle}$" is produced by "`\mathbb{\Langle \Lbrack\Lparen\bbalpha\bbbeta\bbgamma\Rparen\Rbrack\Rangle}`".

mbboard extends the blackboard bold symbol set significantly further. It supports not only the Greek alphabet—including "Greek-like" symbols such as `\bbnabla` ("$\mathbb{\bbnabla}$")—but also *all* punctuation marks, various currency symbols such as `\bbdollar` ("$\mathbb{\bbdollar}$") and `\bbeuro` ("$\mathbb{\bbeuro}$"), and the Hebrew alphabet (e.g., "`\bbfinalnun\bbyod\bbqof \bbpe`" → "$\mathbb{\bbfinalnun\bbyod\bbqof\bbpe}$").

‡ The `\sym...` commands provided by the GHiNA2e package are actually text-mode commands. They are included in Table 213 because they resemble the blackboard-bold symbols that appear in the rest of the table. In addition to the 26 letters of the English alphabet, GHiNA2e provides three umlauted blackboard-bold letters: `\symAE` ("Ä"), `\symOE` ("Ö"), and `\symUE` ("Ü"). Note that GHiNA2e does provide math-mode commands for the most common number-set symbols. These are presented in Table 130 on page 56.

¶ As their `\text...` names imply, the fonts provided by the yfonts package are actually text fonts. They are included in Table 213 because they are frequently used in a mathematical context.

§ An older (i.e., prior to 1991) version of the $\mathcal{AMS}$'s fonts rendered $\mathbb{C}$, $\mathbb{N}$, $\mathbb{R}$, $\mathbb{S}$, and $\mathbb{Z}$ as $\mathbb{C}$, $\mathbb{N}$, $\mathbb{R}$, $\mathbb{S}$, and $\mathbb{Z}$. As some people prefer the older glyphs—much to the $\mathcal{AMS}$'s surprise—and because those glyphs fail to build under modern versions of METAFONT, Berthold Horn uploaded PostScript fonts for the older blackboard-bold glyphs to CTAN, to the `fonts/msym10` directory. As of this writing, however, there are no LaTeX 2_ε packages for utilizing the now-obsolete glyphs.

4 Science and technology symbols

This section lists symbols that are employed in various branches of science and engineering.

Table 214: gensymb Symbols Defined to Work in Both Math and Text Mode

℃	`\celsius`	µ	`\micro`	‰	`\perthousand`
°	`\degree`	Ω	`\ohm`		

Table 215: wasysym Electrical and Physical Symbols

∼	`\AC`	≋	`\VHF`	∼∼∼	`\photon`	F	`\HF`	`\gluon`

Table 216: ifsym Pulse Diagram Symbols

⌝⌞	`\FallingEdge`	⌝⌟⌜	`\LongPulseLow`	⌝⌜	`\PulseLow`	⌟⌞	`\ShortPulseHigh`
⌟⌜⌞	`\LongPulseHigh`	⌟⌞	`\PulseHigh`	⌟⌜	`\RaisingEdge`	⌝⌞	`\ShortPulseLow`

In addition, within `\textifsym{...}`, the following codes are valid:

_	l	¯	m	‾	h	‗	d	〈	<	〉	>
‗	L	‾	M	‾	H	‗	D	〈	<<	〉	>>

This enables one to write "`\textifsym{mm<DDD>mm}`" to get "⟷" or "`\textifsym{L|H|L|H|L}`" to get "⌞⌜⌟⌜⌟". See also the timing package, which provides a wide variety of pulse-diagram symbols within an environment designed specifically for typesetting pulse diagrams.

Finally, `\textifsym` supports the display of segmented digits, as would appear on an LCD: "`\textifsym{-123.456}`" produces "- 123.456". "`\textifsym{b}`" outputs a blank with the same width as an "8".

Table 217: ar Aspect Ratio Symbol

$\mathcal{R}$	`\AR`

Table 218: textcomp Text-mode Science and Engineering Symbols

℃	`\textcelsius`	℧	`\textmho`	µ	`\textmu`	Ω	`\textohm`

TABLE 219: steinmetz Extensible Phasor Symbol

/*abc* `\phase{abc}`

The `\phase` command uses the pict2e package to draw a horizontally and vertically scalable Steinmetz phasor symbol. Consequently, `\phase` works only with those TEX backends supported by pict2e. See the pict2e documentation for more information.

TABLE 220: wasysym Astronomical Symbols

☿	`\mercury`	♁	`\earth`	♃	`\jupiter`	♅	`\uranus`	♇	`\pluto`
♀	`\venus`	♂	`\mars`	♄	`\saturn`	♆	`\neptune`		
⊙	`\astrosun`	○	`\fullmoon`	☾	`\leftmoon`	●	`\newmoon`	☽	`\rightmoon`
♈	`\aries`	♋	`\cancer`	♎	`\libra`	≈	`\aquarius`		
♉	`\taurus`	♌	`\leo`	♏	`\scorpio`	♑	`\capricornus`		
♊	`\gemini`	♍	`\virgo`	➶	`\sagittarius`	♓	`\pisces`		
☊	`\ascnode`	☋	`\descnode`	☌	`\conjunction`	☍	`\opposition`	♈	`\vernal`

TABLE 221: marvosym Astronomical Symbols

☿	`\Mercury`	♁	`\Earth`	♃	`\Jupiter`	♅	`\Uranus`	♇	`\Pluto`
♀	`\Venus`	♂	`\Mars`	♄	`\Saturn`	♆	`\Neptune`		
☽	`\Moon`	☉	`\Sun`						
♈	`\Aries`	♋	`\Cancer`	♎	`\Libra`	♑	`\Capricorn`		
♉	`\Taurus`	♌	`\Leo`	♏	`\Scorpio`	♒	`\Aquarius`		
♊	`\Gemini`	♍	`\Virgo`	➶	`\Sagittarius`	♓	`\Pisces`		

Note that `\Aries` ... `\Pisces` can also be specified with `\Zodiac{1}` ... `\Zodiac{12}`.

TABLE 222: mathabx Astronomical Symbols

☿	`\Mercury`	⊕	`\Earth`	♃	`\Jupiter`	♅	`\Uranus`	♇	`\Pluto`
♀	`\Venus`	♂	`\Mars`	♄	`\Saturn`	♆	`\Neptune`	♁	`\varEarth`
○	`\fullmoon`	☾	`\leftmoon`	●	`\newmoon`	☽	`\rightmoon`	⊙	`\Sun`
♈	`\Aries`	♉	`\Taurus`	♊	`\Gemini`				

mathabx also defines `\girl` as an alias for `\Venus`, `\boy` as an alias for `\Mars`, and `\Moon` as an alias for `\leftmoon`.

TABLE 223: wasysym APL Symbols

⌷	\APLbox	⌹	\APLinv	⋆	\APLstar
⍝	\APLcomment	⍇	\APLleftarrowbox	⍋	\APLup
⍛	\APLdown	⍟	\APLlog	⍐	\APLuparrowbox
⍗	\APLdownarrowbox	⍘	\APLminus	⍀	\notbackslash
⍞	\APLinput	⍈	\APLrightarrowbox	⌿	\notslash

TABLE 224: wasysym APL Modifiers

∘	\APLcirc{}	∼	\APLnot{}	|	\APLvert{}

TABLE 225: marvosym Computer Hardware Symbols

	\ComputerMouse		\ParallelPort		\SerialInterface
	\Keyboard		\Printer		\SerialPort

TABLE 226: keystroke Computer Keys

Alt	\Alt	Enter	\Enter*	PrtSc	\PrtSc*
AltGr	\AltGr	Esc	\Esc*	→	\RArrow
Break	\Break*	Home	\Home*	↩	\Return
⟵	\BSpace†	Ins	\Ins*	Scroll	\Scroll*
Ctrl	\Ctrl*	←	\LArrow	Shift ⇑	\Shift*
↓	\DArrow	Num	\NumLock		\Spacebar
Del	\Del*	Page ↓	\PgDown*	⇆	\Tab†
End	\End*	Page ↑	\PgUp*	↑	\UArrow

* Changes based on the language option passed to the keystroke package. For example, the german option makes \Del produce " Entf " instead of " Del ".

† These symbols utilize the rotating package and therefore display improperly in most DVI viewers.

The \keystroke command draws a key with an arbitrary label. For example, "\keystroke{F7}" produces " F7 ".

TABLE 227: ascii Control Characters (CP437)

☺	\SOH	◘	\BS	☼	\SI	▬	\SYN	↔	\GS
☻	\STX	○	\HT	►	\DLE	↨	\ETB	▲	\RS
♥	\ETX	◙	\LF	◄	\DCa	↑	\CAN	▼	\US
♦	\EOT	♂	\VT	↕	\DCb	↓	\EM		
♣	\ENQ	♀	\FF	‼	\DCc	→	\SUB		
♠	\ACK	♪	\CR	¶	\DCd	←	\ESC		
•	\BEL	♫	\SO	§	\NAK	└	\FS		
⌂	\DEL		\NBSP		\NUL	¦	\splitvert		

Code Page 437 (CP437), which was first utilized by the original IBM PC, uses the symbols `\SOH` through `\US` to depict ASCII characters 1–31 and `\DEL` to depict ASCII character 127. The `\NUL` symbol, not part of CP437, represents ASCII character 0. `\NBSP`, also not part of CP437, represents a nonbreaking space. `\splitvert` is merely the "|" character drawn as it was on the IBM PC.

TABLE 228: milstd Logic Gates

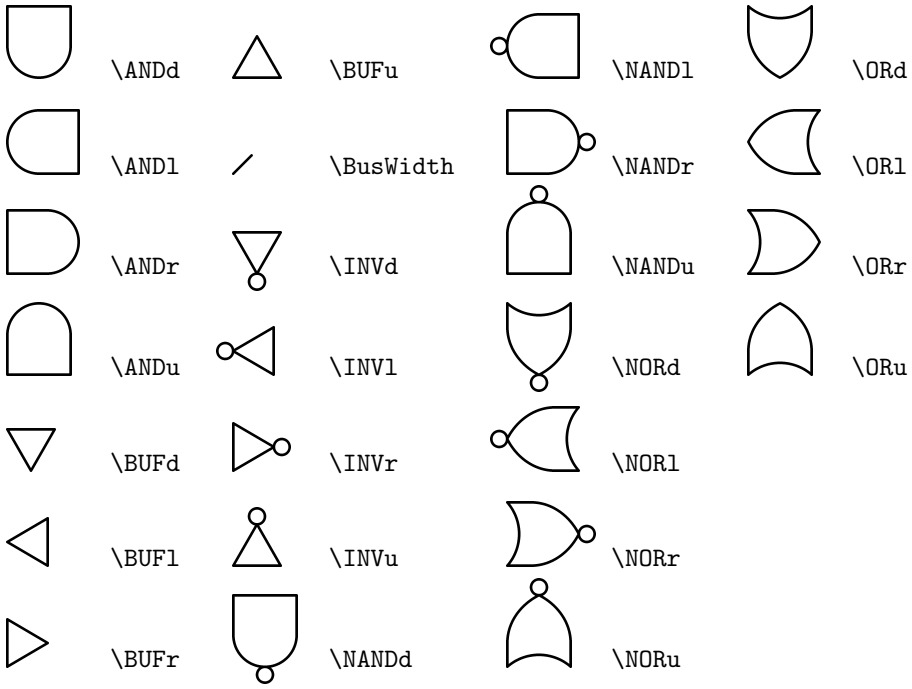

The milstd package, which provides the digital logic-gate symbols specified by the U.S. Department of Defense's MIL-STD-806 standard, was written as a LaTeX 2.09 `.tex` file, not as a LaTeX 2_ε package. Consequently, it must be loaded into a document with `\input milstd`, not with the more modern `\usepackage{milstd}`.

TABLE 229: marvosym Communication Symbols

	\Email		\fax		\Faxmachine		\Lightning		\Pickup
	\Emailct		\FAX		\Letter		\Mobilefone		\Telefon

TABLE 230: marvosym Engineering Symbols

	\Beam		\Force		\Octosteel		\RoundedTTsteel
	\Bearing		\Hexasteel		\Rectpipe		\Squarepipe
	\Circpipe		\Lefttorque		\Rectsteel		\Squaresteel
	\Circsteel		\Lineload		\Righttorque		\Tsteel
	\Fixedbearing		\Loosebearing		\RoundedLsteel*		\TTsteel
	\Flatsteel		\Lsteel		\RoundedTsteel*		

* \RoundedLsteel and \RoundedTsteel seem to be swapped, at least in the 2000/05/01 version of marvosym.

TABLE 231: wasysym Biological Symbols

♀	\female	♂	\male

TABLE 232: marvosym Biological Symbols

	\Female		\FemaleMale		\MALE		\Neutral
	\FEMALE		\Hermaphrodite		\Male		
	\FemaleFemale		\HERMAPHRODITE		\MaleMale		

TABLE 233: marvosym Safety-related Symbols

	\Biohazard		\CEsign		\Explosionsafe		\Radioactivity
	\BSEfree		\Estatically		\Laserbeam		\Stopsign

TABLE 234: feyn Feynman Diagram Symbols

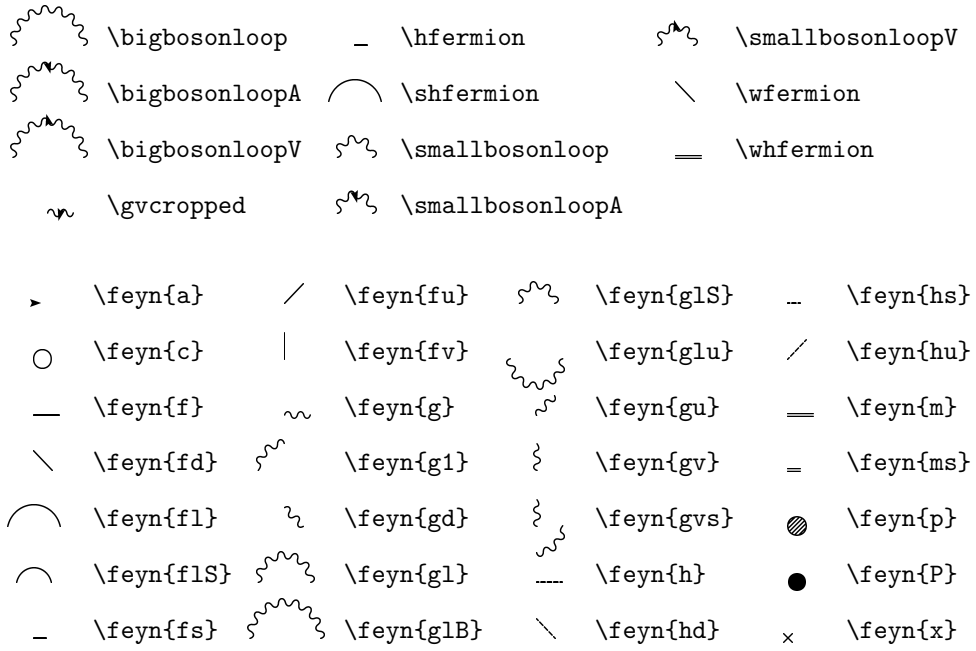

All other arguments to the `\feyn` command produce a "▯" symbol.

The feyn package provides various commands for composing the preceding symbols into complete Feynman diagrams. See the feyn documentation for examples and additional information.

5 Dingbats

Dingbats are symbols such as stars, arrows, and geometric shapes. They are commonly used as bullets in itemized lists or, more generally, as a means to draw attention to the text that follows.

The pifont dingbat package warrants special mention. Among other capabilities, pifont provides a LaTeX interface to the Zapf Dingbats font (one of the standard 35 PostScript fonts). However, rather than name each of the dingbats individually, pifont merely provides a single `\ding` command, which outputs the character that lies at a given position in the font. The consequence is that the pifont symbols can't be listed by name in this document's index, so be mindful of that fact when searching for a particular symbol.

Table 235: bbding Arrows

➥	\ArrowBoldDownRight	➧	\ArrowBoldRightShort	➦	\ArrowBoldUpRight
➲	\ArrowBoldRightCircled	➠	\ArrowBoldRightStrobe		

Table 236: pifont Arrows

➔	\ding{212}	→	\ding{221}	➦	\ding{230}	⇨	\ding{239}	➶	\ding{249}
→	\ding{213}	➙	\ding{222}	➧	\ding{231}	⇨	\ding{241}	➷	\ding{250}
↔	\ding{214}	➛	\ding{223}	➨	\ding{232}	➲	\ding{242}	➸	\ding{251}
↕	\ding{215}	➠	\ding{224}	⇨	\ding{233}	➳	\ding{243}	➹	\ding{252}
➘	\ding{216}	➨	\ding{225}	⇨	\ding{234}	➴	\ding{244}	➺	\ding{253}
➙	\ding{217}	➢	\ding{226}	⇨	\ding{235}	➵	\ding{245}	➻	\ding{254}
➚	\ding{218}	➢	\ding{227}	⇨	\ding{236}	➶	\ding{246}		
➛	\ding{219}	➤	\ding{228}	⇨	\ding{237}	➷	\ding{247}		
➔	\ding{220}	➥	\ding{229}	⇨	\ding{238}	➸	\ding{248}		

Table 237: universal Arrows

⇀	\bauarrow	⇨	\bauwhitearrow

Table 238: marvosym Scissors

✁	\Cutleft	✂	\Cutright	✁	\Leftscissors
---	\Cutline	---	\Kutline	✂	\Rightscissors

Table 239: bbding Scissors

✃	\ScissorHollowLeft	✁	\ScissorLeftBrokenTop
✂	\ScissorHollowRight	✂	\ScissorRight
✁	\ScissorLeft	✂	\ScissorRightBrokenBottom
✁	\ScissorLeftBrokenBottom	✂	\ScissorRightBrokenTop

Table 240: pifont Scissors

✁ \ding{33} ✂ \ding{34} ✃ \ding{35} ✄ \ding{36}

Table 241: dingbat Pencils

\largepencil ✎ \smallpencil

Table 242: bbding Pencils and Nibs

\NibLeft	\PencilLeft	\PencilRightDown
\NibRight	\PencilLeftDown	\PencilRightUp
\NibSolidLeft	\PencilLeftUp	
\NibSolidRight	\PencilRight	

Table 243: pifont Pencils and Nibs

✎ \ding{46} ✏ \ding{47} ✐ \ding{48} ✑ \ding{49} ✒ \ding{50}

Table 244: dingbat Fists

\leftpointright	\rightpointleft	\rightpointright
\leftthumbsdown	\rightthumbsdown	
\leftthumbsup	\rightthumbsup	

Table 245: bbding Fists

\HandCuffLeft	\HandCuffRightUp	\HandPencilLeft
\HandCuffLeftUp	\HandLeft	\HandRight
\HandCuffRight	\HandLeftUp	\HandRightUp

Table 246: pifont Fists

☛ \ding{42} ☞ \ding{43} ✌ \ding{44} ✍ \ding{45}

Table 247: fourier Fists

☞ \lefthand ☜ \righthand

TABLE 248: bbding Crosses and Plusses

✝	\Cross	✞	\CrossOpenShadow	✙	\PlusOutline
✟	\CrossBoldOutline	✝	\CrossOutline	✛	\PlusThinCenterOpen
✣	\CrossClowerTips	✚	\Plus		
✠	\CrossMaltese	✜	\PlusCenterOpen		

TABLE 249: pifont Crosses and Plusses

✙	\ding{57}	✛	\ding{59}	✝	\ding{61}	✟	\ding{63}
✚	\ding{58}	✜	\ding{60}	✞	\ding{62}	✠	\ding{64}

TABLE 250: bbding Xs and Check Marks

✓	\Checkmark	╳	\XSolid	✗	\XSolidBrush
✔	\CheckmarkBold	✖	\XSolidBold		

TABLE 251: pifont Xs and Check Marks

✓	\ding{51}	×	\ding{53}	✗	\ding{55}
✔	\ding{52}	✖	\ding{54}	✘	\ding{56}

TABLE 252: wasysym Xs and Check Marks

☑	\CheckedBox	□	\Square	☒	\XBox

TABLE 253: universal Xs

✖	\baucross

Table 254: pifont Circled Numbers

①	\ding{172}	❶	\ding{182}	①	\ding{192}	❶	\ding{202}
②	\ding{173}	❷	\ding{183}	②	\ding{193}	❷	\ding{203}
③	\ding{174}	❸	\ding{184}	③	\ding{194}	❸	\ding{204}
④	\ding{175}	❹	\ding{185}	④	\ding{195}	❹	\ding{205}
⑤	\ding{176}	❺	\ding{186}	⑤	\ding{196}	❺	\ding{206}
⑥	\ding{177}	❻	\ding{187}	⑥	\ding{197}	❻	\ding{207}
⑦	\ding{178}	❼	\ding{188}	⑦	\ding{198}	❼	\ding{208}
⑧	\ding{179}	❽	\ding{189}	⑧	\ding{199}	❽	\ding{209}
⑨	\ding{180}	❾	\ding{190}	⑨	\ding{200}	❾	\ding{210}
⑩	\ding{181}	❿	\ding{191}	⑩	\ding{201}	❿	\ding{211}

pifont (part of the psnfss package) provides a `dingautolist` environment which resembles `enumerate` but uses circled numbers as bullets.[4] See the psnfss documentation for more information.

Table 255: wasysym Stars

✡	\davidsstar	✳	\hexstar	✳	\varhexstar

Table 256: bbding Stars, Flowers, and Similar Shapes

✻	\Asterisk	✿	\FiveFlowerPetal	✣	\JackStar
✱	\AsteriskBold	★	\FiveStar	✤	\JackStarBold
✲	\AsteriskCenterOpen	☆	\FiveStarCenterOpen	✾	\SixFlowerAlternate
✽	\AsteriskRoundedEnds	✯	\FiveStarConvex	❋	\SixFlowerAltPetal
✳	\AsteriskThin	✰	\FiveStarLines	✼	\SixFlowerOpenCenter
✴	\AsteriskThinCenterOpen	☆	\FiveStarOpen	❀	\SixFlowerPetalDotted
✡	\DavidStar	✪	\FiveStarOpenCircled	✻	\SixFlowerPetalRemoved
✸	\DavidStarSolid	✭	\FiveStarOpenDotted	❁	\SixFlowerRemovedOpenPetal
✻	\EightAsterisk	✭	\FiveStarOutline	✶	\SixStar
❀	\EightFlowerPetal	✰	\FiveStarOutlineHeavy	✺	\SixteenStarLight
✼	\EightFlowerPetalRemoved	☆	\FiveStarShadow	❄	\Snowflake
✷	\EightStar	✢	\FourAsterisk	❆	\SnowflakeChevron
✸	\EightStarBold	❀	\FourClowerOpen	❅	\SnowflakeChevronBold
✵	\EightStarConvex	✤	\FourClowerSolid	✻	\Sparkle
✶	\EightStarTaper	✦	\FourStar	✼	\SparkleBold
❀	\FiveFlowerOpen	✧	\FourStarOpen	✹	\TwelweStar

[4] In fact, `dingautolist` can use any set of consecutive Zapf Dingbats symbols.

TABLE 257: pifont Stars, Flowers, and Similar Shapes

✡	\ding{65}	✪	\ding{74}	✳	\ding{83}	✼	\ding{92}	❄	\ding{101}		
✢	\ding{66}	✫	\ding{75}	✴	\ding{84}	✽	\ding{93}	❅	\ding{102}		
✣	\ding{67}	✬	\ding{76}	✵	\ding{85}	✾	\ding{94}	❆	\ding{103}		
✤	\ding{68}	✭	\ding{77}	✶	\ding{86}	✿	\ding{95}	❇	\ding{104}		
✥	\ding{69}	✮	\ding{78}	✷	\ding{87}	❀	\ding{96}	❈	\ding{105}		
✦	\ding{70}	✯	\ding{79}	✸	\ding{88}	❁	\ding{97}	❉	\ding{106}		
✧	\ding{71}	✰	\ding{80}	✹	\ding{89}	❂	\ding{98}	❊	\ding{107}		
★	\ding{72}	✱	\ding{81}	✺	\ding{90}	❃	\ding{99}				
☆	\ding{73}	✲	\ding{82}	✻	\ding{91}	❄	\ding{100}				

TABLE 258: fourier Ornaments

	\aldine		\decoone		\floweroneright
	\aldineleft		\decosix		\leafleft
	\aldineright		\decothreeleft		\leafNE
	\aldinesmall		\decothreeright		\leafright
	\decofourleft		\decotwo	✦	\starredbullet
	\decofourright		\floweroneleft		

TABLE 259: wasysym Geometric Shapes

⬡	\hexagon	◯	\octagon	⬠	\pentagon	⬡	\varhexagon

TABLE 260: MnSymbol Geometric Shapes

★	\filledlargestar	◇	\largediamond	☆	\largestar	◊	\smalllozenge
⧫	\filledlozenge	◊	\largelozenge	✡	\largestarofdavid		
⧫	\filledmedlozenge	☆	\largepentagram	◊	\medlozenge		
◯	\largecircle	□	\largesquare	✡	\medstarofdavid		

MnSymbol defines \bigcirc as a synonym for \largecircle; \bigstar as a synonym for \filledlargestar; \lozenge as a synonym for \medlozenge; and, \blacklozenge as a synonym for \filledmedlozenge.

TABLE 261: ifsym Geometric Shapes

○	\BigCircle	▶	\FilledBigTriangleRight	○	\SmallCircle
×	\BigCross	▲	\FilledBigTriangleUp	×	\SmallCross
◇	\BigDiamondshape	●	\FilledCircle	◇	\SmallDiamondshape
—	\BigHBar	◈	\FilledDiamondShadowA	–	\SmallHBar
◆	\BigLowerDiamond	◈	\FilledDiamondShadowC	◆	\SmallLowerDiamond
◆	\BigRightDiamond	◆	\FilledDiamondshape	◆	\SmallRightDiamond
□	\BigSquare	●	\FilledSmallCircle	□	\SmallSquare
▽	\BigTriangleDown	◆	\FilledSmallDiamondshape	▽	\SmallTriangleDown
◁	\BigTriangleLeft	■	\FilledSmallSquare	◁	\SmallTriangleLeft
▷	\BigTriangleRight	▼	\FilledSmallTriangleDown	▷	\SmallTriangleRight
△	\BigTriangleUp	◀	\FilledSmallTriangleLeft	△	\SmallTriangleUp
|	\BigVBar	▶	\FilledSmallTriangleRight	|	\SmallVBar
○	\Circle	▲	\FilledSmallTriangleUp	↓	\SpinDown
×	\Cross	■	\FilledSquare	↑	\SpinUp
◈	\DiamondShadowA	■	\FilledSquareShadowA	□	\Square
◈	\DiamondShadowB	■	\FilledSquareShadowC	▣	\SquareShadowA
◈	\DiamondShadowC	▼	\FilledTriangleDown	▣	\SquareShadowB
◇	\Diamondshape	◀	\FilledTriangleLeft	▣	\SquareShadowC
●	\FilledBigCircle	▶	\FilledTriangleRight	▽	\TriangleDown
◆	\FilledBigDiamondshape	▲	\FilledTriangleUp	◁	\TriangleLeft
■	\FilledBigSquare	—	\HBar	▷	\TriangleRight
▼	\FilledBigTriangleDown	◆	\LowerDiamond	△	\TriangleUp
◀	\FilledBigTriangleLeft	◆	\RightDiamond	|	\VBar

The ifsym documentation points out that one can use \rlap to combine some of the above into useful, new symbols. For example, \BigCircle and \FilledSmallCircle combine to give "◉". Likewise, \Square and \Cross combine to give "⊠". See Section 8.3 for more information about constructing new symbols out of existing symbols.

TABLE 262: bbding Geometric Shapes

○	\CircleShadow	▌	\Rectangle	❑	\SquareShadowTopLeft
●	\CircleSolid	▌	\RectangleBold	❑	\SquareShadowTopRight
◆	\DiamondSolid	|	\RectangleThin	■	\SquareSolid
⬭	\Ellipse	□	\Square	▼	\TriangleDown
⬭	\EllipseShadow	❑	\SquareCastShadowBottomRight	▲	\TriangleUp
⬬	\EllipseSolid	❑	\SquareCastShadowTopLeft		
◖	\HalfCircleLeft	❑	\SquareCastShadowTopRight		
◗	\HalfCircleRight	❑	\SquareShadowBottomRight		

TABLE 263: pifont Geometric Shapes

●	\ding{108}	❑	\ding{111}	❒	\ding{114}	◆	\ding{117}	❙	\ding{121}
❍	\ding{109}	❒	\ding{112}	▲	\ding{115}	◗	\ding{119}	▮	\ding{122}
■	\ding{110}	❑	\ding{113}	▼	\ding{116}	|	\ding{120}		

TABLE 264: universa Geometric Shapes

●	\baucircle	■	\bausquare	▲	\bautriangle

TABLE 265: universal Geometric Shapes

⊡	\baucircle	●	\bauhole	■	\bausquare
●	\baueclipse	●	\baupunct	▲	\bautriangle

TABLE 266: Miscellaneous dingbat Dingbats

⚓	\anchor	👁	\eye	▤	\Sborder
⏎	\carriagereturn	⬝	\filledsquarewithdots	⬚	\squarewithdots
✓	\checkmark	📡	\satellitedish	▥	\Zborder

TABLE 267: Miscellaneous bbding Dingbats

✉	\Envelope	✌	\Peace	✆	\PhoneHandset	✪	\SunshineOpenCircled
❖	\OrnamentDiamondSolid	☎	\Phone	✈	\Plane	✇	\Tape

TABLE 268: Miscellaneous pifont Dingbats

☎	\ding{37}	✈	\ding{40}	❤	\ding{164}	❧	\ding{167}	♠	\ding{171}
✆	\ding{38}	✉	\ding{41}	❥	\ding{165}	♣	\ding{168}	♦	\ding{169}
✇	\ding{39}	❖	\ding{118}	❦	\ding{166}	♥	\ding{170}		

6 Ancient languages

This section presents letters and ideograms from various ancient scripts. Some of these symbols may also be useful in other typesetting contexts.

TABLE 269: phaistos Symbols from the Phaistos Disk

	\PHarrow		\PHeagle		\PHplumedHead
	\PHbee		\PHflute		\PHram
	\PHbeehive		\PHgaunlet		\PHrosette
	\PHboomerang		\PHgrater		\PHsaw
	\PHbow		\PHhelmet		\PHshield
	\PHbullLeg		\PHhide		\PHship
	\PHcaptive		\PHhorn		\PHsling
	\PHcarpentryPlane		\PHlid		\PHsmallAxe
	\PHcat		\PHlily		\PHstrainer
	\PHchild		\PHmanacles		\PHtattooedHead
	\PHclub		\PHmattock		\PHtiara
	\PHcolumn		\PHoxBack		\PHtunny
	\PHcomb		\PHpapyrus		\PHvine
	\PHdolium		\PHpedestrian		\PHwavyBand
	\PHdove		\PHplaneTree		\PHwoman

TABLE 270: protosem Proto-Semitic Characters

𐤀	\Aaleph	𐤄	\AAhe	𐤊	\Akaph	𐤎	\Asamekh	𐤑	\AAresh
𐤁	\AAaleph	𐤆	\Azayin	𐤋	\AAkaph	𐤐	\Ape	𐤔	\Ashin
𐤂	\Abeth	𐤅	\Avav	𐤌	\Alamed	𐤓	\AApe	𐤕	\Ahelmet
𐤃	\AAbeth	𐤇	\Aheth	𐤍	\AAlamed	𐤒	\Asade	𐤖	\AAhelmet
𐤄	\Agimel	𐤈	\AAheth	𐤎	\Amem	𐤕	\AAsade	𐤗	\Atav
𐤅	\Adaleth	𐤉	\Ateth	𐤏	\Anun	𐤖	\Aqoph		
𐤆	\AAdaleth	𐤊	\Ayod	𐤐	\Aayin	𐤗	\AAqoph		
𐤇	\Ahe	𐤋	\AAyod	𐤑	\AAayin	𐤘	\Aresh		

The protosem package defines abbreviated control sequences for each of the above. In addition, single-letter shortcuts can be used within the argument to the `\textproto` command (e.g., "`\textproto{Pakyn}`" produces "𐤓𐤀𐤊𐤉𐤍"). See the protosem documentation for more information.

TABLE 271: hieroglf Hieroglyphics

	\HA		\HI		\Hn		\HT
	\Ha		\Hi		\HO		\Ht
	\HB		\Hibl		\Ho		\Htongue
	\Hb		\Hibp		\Hp		\HU
	\Hc		\Hibs		\HP		\Hu
	\HC		\Hibw		\Hplural		\HV
	\HD		\HJ		\Hplus		\Hv
	\Hd		\Hj		\HQ		\Hvbar
	\Hdual		\Hk		\Hq		\Hw
	\He		\HK		\Hquery		\HW
	\HE		\HL		\HR		\HX
	\Hf		\Hl		\Hr		\Hx
	\HF		\Hm		\Hs		\HY
	\HG		\HM		\HS		\Hy
	\Hg		\Hman		\Hscribe		\Hz
	\Hh		\Hms		\Hslash		\HZ
	\HH		\HN		\Hsv		
	\Hone		\Hhundred		\HXthousand		\Hmillion
	\Hten		\Hthousand		\HCthousand		

The hieroglf package defines alternate control sequences and single-letter shortcuts for each of the above which can be used within the argument to the `\textpmhg` command (e.g., "`\textpmhg{Pakin}`" produces ""). See the hieroglf documentation for more information.

TABLE 272: linearA Linear A Script

	\LinearAI		\LinearAXCIX		\LinearACXCVII		\LinearACCXCV
	\LinearAII		\LinearAC		\LinearACXCVIII		\LinearACCXCVI
	\LinearAIII		\LinearACI		\LinearACXCIX		\LinearACCXCVII
	\LinearAIV		\LinearACII		\LinearACC		\LinearACCXCVIII
	\LinearAV		\LinearACIII		\LinearACCI		\LinearACCXCIX
	\LinearAVI		\LinearACIV		\LinearACCII		\LinearACCC
	\LinearAVII		\LinearACV		\LinearACCIII		\LinearACCCI
	\LinearAVIII		\LinearACVI		\LinearACCIV		\LinearACCCII
	\LinearAIX		\LinearACVII		\LinearACCV		\LinearACCCIII

(continued on next page)

(continued from previous page)

𐗀	\LinearAX	𐗨	\LinearACVIII	𐗐	\LinearACCVI	𐗸	\LinearACCCIV
𐗁	\LinearAXI	𐗩	\LinearACIX	𐗑	\LinearACCVII	𐗹	\LinearACCCV
𐗂	\LinearAXII	𐗪	\LinearACX	𐗒	\LinearACCVIII	𐗺	\LinearACCCVI
𐗃	\LinearAXIII	𐗫	\LinearACXI	𐗓	\LinearACCIX	𐗻	\LinearACCCVII
𐗄	\LinearAXIV	𐗬	\LinearACXII	𐗔	\LinearACCX	𐗼	\LinearACCCVIII
𐗅	\LinearAXV	𐗭	\LinearACXIII	𐗕	\LinearACCXI	𐗽	\LinearACCCIX
𐗆	\LinearAXVI	𐗮	\LinearACXIV	𐗖	\LinearACCXII	𐗾	\LinearACCCX
𐗇	\LinearAXVII	𐗯	\LinearACXV	𐗗	\LinearACCXIII	𐗿	\LinearACCCXI
𐗈	\LinearAXVIII	𐗰	\LinearACXVI	𐗘	\LinearACCXIV	𐘀	\LinearACCCXII
𐗉	\LinearAXIX	𐗱	\LinearACXVII	𐗙	\LinearACCXV	𐘁	\LinearACCCXIII
𐗊	\LinearAXX	𐗲	\LinearACXVIII	𐗚	\LinearACCXVI	𐘂	\LinearACCCXIV
𐗋	\LinearAXXI	𐗳	\LinearACXIX	𐗛	\LinearACCXVII	𐘃	\LinearACCCXV
𐗌	\LinearAXXII	𐗴	\LinearACXX	𐗜	\LinearACCXVIII	𐘄	\LinearACCCXVI
𐗍	\LinearAXXIII	𐗵	\LinearACXXI	𐗝	\LinearACCXIX	𐘅	\LinearACCCXVII
𐗎	\LinearAXXIV	𐗶	\LinearACXXII	𐗞	\LinearACCXX	𐘆	\LinearACCCXVIII
𐗏	\LinearAXXV	𐗷	\LinearACXXIII	𐗟	\LinearACCXXI	𐘇	\LinearACCCXIX
𐗐	\LinearAXXVI	𐗸	\LinearACXXIV	𐗠	\LinearACCXXII	𐘈	\LinearACCCXX
𐗑	\LinearAXXVII	𐗹	\LinearACXXV	𐗡	\LinearACCXXIII	𐘉	\LinearACCCXXI
𐗒	\LinearAXXVIII	𐗺	\LinearACXXVI	𐗢	\LinearACCXXIV	𐘊	\LinearACCCXXII
𐗓	\LinearAXXIX	𐗻	\LinearACXXVII	𐗣	\LinearACCXXV	𐘋	\LinearACCCXXIII
𐗔	\LinearAXXX	𐗼	\LinearACXXVIII	𐗤	\LinearACCXXVI	𐘌	\LinearACCCXXIV
𐗕	\LinearAXXXI	𐗽	\LinearACXXIX	𐗥	\LinearACCXXVII	𐘍	\LinearACCCXXV
𐗖	\LinearAXXXII	𐗾	\LinearACXXX	𐗦	\LinearACCXXVIII	𐘎	\LinearACCCXXVI
𐗗	\LinearAXXXIII	𐗿	\LinearACXXXI	𐗧	\LinearACCXXIX	𐘏	\LinearACCCXXVII
𐗘	\LinearAXXXIV	𐘀	\LinearACXXXII	𐗨	\LinearACCXXX	𐘐	\LinearACCCXXVIII
𐗙	\LinearAXXXV	𐘁	\LinearACXXXIII	𐗩	\LinearACCXXXI	𐘑	\LinearACCCXXIX
𐗚	\LinearAXXXVI	𐘂	\LinearACXXXIV	𐗪	\LinearACCXXXII	𐘒	\LinearACCCXXX
𐗛	\LinearAXXXVII	𐘃	\LinearACXXXV	𐗫	\LinearACCXXXIII	𐘓	\LinearACCCXXXI
𐗜	\LinearAXXXVIII	𐘄	\LinearACXXXVI	𐗬	\LinearACCXXXIV	𐘔	\LinearACCCXXXII
𐗝	\LinearAXXXIX	𐘅	\LinearACXXXVII	𐗭	\LinearACCXXXV	𐘕	\LinearACCCXXXIII
𐗞	\LinearAXL	𐘆	\LinearACXXXVIII	𐗮	\LinearACCXXXVI	𐘖	\LinearACCCXXXIV
𐗟	\LinearAXLI	𐘇	\LinearACXXXIX	𐗯	\LinearACCXXXVII	𐘗	\LinearACCCXXXV
𐗠	\LinearAXLII	𐘈	\LinearACXL	𐗰	\LinearACCXXXVIII	𐘘	\LinearACCCXXXVI
𐗡	\LinearAXLIII	𐘉	\LinearACXLI	𐗱	\LinearACCXXXIX	𐘙	\LinearACCCXXXVII
𐗢	\LinearAXLIV	𐘊	\LinearACXLII	𐗲	\LinearACCXL	𐘚	\LinearACCCXXXVIII
𐗣	\LinearAXLV	𐘋	\LinearACXLIII	𐗳	\LinearACCXLI	𐘛	\LinearACCCXXXIX
𐗤	\LinearAXLVI	𐘌	\LinearACXLIV	𐗴	\LinearACCXLII	𐘜	\LinearACCCXL
𐗥	\LinearAXLVII	𐘍	\LinearACXLV	𐗵	\LinearACCXLIII	𐘝	\LinearACCCXLI
𐗦	\LinearAXLVIII	𐘎	\LinearACXLVI	𐗶	\LinearACCXLIV	𐘞	\LinearACCCXLII
𐗧	\LinearAXLIX	𐘏	\LinearACXLVII	𐗷	\LinearACCXLV	𐘟	\LinearACCCXLIII
𐗨	\LinearAL	𐘐	\LinearACXLVIII	𐗸	\LinearACCXLVI	𐘠	\LinearACCCXLIV
𐗩	\LinearALI	𐘑	\LinearACXLIX	𐗹	\LinearACCXLVII	𐘡	\LinearACCCXLV
𐗪	\LinearALII	𐘒	\LinearACL	𐗺	\LinearACCXLVIII	𐘢	\LinearACCCXLVI
𐗫	\LinearALIII	𐘓	\LinearACLI	𐗻	\LinearACCXLIX	𐘣	\LinearACCCXLVII
𐗬	\LinearALIV	𐘔	\LinearACLII	𐗼	\LinearACCL	𐘤	\LinearACCCXLVIII
𐗭	\LinearALV	𐘕	\LinearACLIII	𐗽	\LinearACCLI	𐘥	\LinearACCCXLIX
𐗮	\LinearALVI	𐘖	\LinearACLIV	𐗾	\LinearACCLII	𐘦	\LinearACCCL
𐗯	\LinearALVII	𐘗	\LinearACLV	𐗿	\LinearACCLIII	𐘧	\LinearACCCLI
𐗰	\LinearALVIII	𐘘	\LinearACLVI	𐘀	\LinearACCLIV	𐘨	\LinearACCCLII

(continued on next page)

(continued from previous page)

	\LinearALIX		\LinearACLVII		\LinearACCLV		\LinearACCCLIII
	\LinearALX		\LinearACLVIII		\LinearACCLVI		\LinearACCCLIV
	\LinearALXI		\LinearACLIX		\LinearACCLVII		\LinearACCCLV
	\LinearALXII		\LinearACLX		\LinearACCLVIII		\LinearACCCLVI
	\LinearALXIII		\LinearACLXI		\LinearACCLIX		\LinearACCCLVII
	\LinearALXIV		\LinearACLXII		\LinearACCLX		\LinearACCCLVIII
	\LinearALXV		\LinearACLXIII		\LinearACCLXI		\LinearACCCLIX
	\LinearALXVI		\LinearACLXIV		\LinearACCLXII		\LinearACCCLX
	\LinearALXVII		\LinearACLXV		\LinearACCLXIII		\LinearACCCLXI
	\LinearALXVIII		\LinearACLXVI		\LinearACCLXIV		\LinearACCCLXII
	\LinearALXIX		\LinearACLXVII		\LinearACCLXV		\LinearACCCLXIII
	\LinearALXX		\LinearACLXVIII		\LinearACCLXVI		\LinearACCCLXIV
	\LinearALXXI		\LinearACLXIX		\LinearACCLXVII		\LinearACCCLXV
	\LinearALXXII		\LinearACLXX		\LinearACCLXVIII		\LinearACCCLXVI
	\LinearALXXIII		\LinearACLXXI		\LinearACCLXIX		\LinearACCCLXVII
	\LinearALXXIV		\LinearACLXXII		\LinearACCLXX		\LinearACCCLXVIII
	\LinearALXXV		\LinearACLXXIII		\LinearACCLXXI		\LinearACCCLXIX
	\LinearALXXVI		\LinearACLXXIV		\LinearACCLXXII		\LinearACCCLXX
	\LinearALXXVII		\LinearACLXXV		\LinearACCLXXIII		\LinearACCCLXXI
	\LinearALXXVIII		\LinearACLXXVI		\LinearACCLXXIV		\LinearACCCLXXII
	\LinearALXXIX		\LinearACLXXVII		\LinearACCLXXV		\LinearACCCLXXIII
	\LinearALXXX		\LinearACLXXVIII		\LinearACCLXXVI		\LinearACCCLXXIV
	\LinearALXXXI		\LinearACLXXIX		\LinearACCLXXVII		\LinearACCCLXXV
	\LinearALXXXII		\LinearACLXXX		\LinearACCLXXVIII		\LinearACCCLXXVI
	\LinearALXXXIII		\LinearACLXXXI		\LinearACCLXXIX		\LinearACCCLXXVII
	\LinearALXXXIV		\LinearACLXXXII		\LinearACCLXXX		\LinearACCCLXXVIII
	\LinearALXXXV		\LinearACLXXXIII		\LinearACCLXXXI		\LinearACCCLXXIX
	\LinearALXXXVI		\LinearACLXXXIV		\LinearACCLXXXII		\LinearACCCLXXX
	\LinearALXXXVII		\LinearACLXXXV		\LinearACCLXXXIII		\LinearACCCLXXXI
	\LinearALXXXVIII		\LinearACLXXXVI		\LinearACCLXXXIV		\LinearACCCLXXXII
	\LinearALXXXIX		\LinearACLXXXVII		\LinearACCLXXXV		\LinearACCCLXXXIII
	\LinearALXXXX		\LinearACLXXXVIII		\LinearACCLXXXVI		\LinearACCCLXXXIV
	\LinearAXCI		\LinearACLXXXIX		\LinearACCLXXXVII		\LinearACCCLXXXV
	\LinearAXCII		\LinearACLXXXX		\LinearACCLXXXVIII		\LinearACCCLXXXVI
	\LinearAXCIII		\LinearACXCI		\LinearACCLXXXIX		\LinearACCCLXXXVII
	\LinearAXCIV		\LinearACXCII		\LinearACCLXXXX		\LinearACCCLXXXVIII
	\LinearAXCV		\LinearACXCIII		\LinearACCXCI		\LinearACCCLXXXIX
	\LinearAXCVI		\LinearACXCIV		\LinearACCXCII		
	\LinearAXCVII		\LinearACXCV		\LinearACCXCIII		
	\LinearAXCVIII		\LinearACXCVI		\LinearACCXCIV		

Table 273: linearb Linear B Basic and Optional Letters

	\Ba		\Bja		\Bmu		\Bpte		\Broii		\Bto
	\Baii		\Bje		\Bna		\Bpu		\Bru		\Btu
	\Baiii		\Bjo		\Bne		\Bpuii		\Bsa		\Btwo
	\Bau		\Bju		\Bni		\Bqa		\Bse		\Bu
	\Bda		\Bka		\Bno		\Bqe		\Bsi		\Bwa
	\Bde		\Bke		\Bnu		\Bqi		\Bso		\Bwe
	\Bdi		\Bki		\Bnwa		\Bqo		\Bsu		\Bwi
	\Bdo		\Bko		\Bo		\Bra		\Bswa		\Bwo
	\Bdu		\Bku		\Bpa		\Braii		\Bswi		\Bza
	\Bdwe		\Bma		\Bpaiii		\Braiii		\Bta		\Bze
	\Bdwo		\Bme		\Bpe		\Bre		\Btaii		\Bzo
	\Be		\Bmi		\Bpi		\Bri		\Bte		
	\Bi		\Bmo		\Bpo		\Bro		\Bti		

These symbols must appear either within the argument to `\textlinb` or following the `\linbfamily` font-selection command within a scope. Single-character shortcuts are also supported: Both "`\textlinb{\Bpa\Bki\Bna}`" and "`\textlinb{pcn}`" produce "𐄁𐄌𐄎", for example. See the linearb documentation for more information.

Table 274: linearb Linear B Numerals

	\BNi		\BNvii		\BNxl		\BNc		\BNdcc
	\BNii		\BNviii		\BNl		\BNcc		\BNdccc
	\BNiii		\BNix		\BNlx		\BNccc		\BNcm
	\BNiv		\BNx		\BNlxx		\BNcd		\BNm
	\BNv		\BNxx		\BNlxxx		\BNd		
	\BNvi		\BNxxx		\BNxc		\BNdc		

These symbols must appear either within the argument to `\textlinb` or following the `\linbfamily` font-selection command within a scope.

Table 275: linearb Linear B Weights and Measures

	\BPtalent		\BPvolb		\BPvolcf		\BPwtb		\BPwtd
	\BPvola		\BPvolcd		\BPwta		\BPwtc		

These symbols must appear either within the argument to `\textlinb` or following the `\linbfamily` font-selection command within a scope.

Table 276: linearb Linear B Ideograms

	\BPamphora		\BPchassis		\BPman		\BPwheat
	\BParrow		\BPcloth		\BPnanny		\BPwheel
	\BPbarley		\BPcow		\BPolive		\BPwine
	\BPbilly		\BPcup		\BPox		\BPwineiih
	\BPboar		\BPewe		\BPpig		\BPwineiiih
	\BPbronze		\BPfoal		\BPram		\BPwineivh
	\BPbull		\BPgoat		\BPsheep		\BPwoman
	\BPcauldroni		\BPgoblet		\BPsow		\BPwool
	\BPcauldronii		\BPgold		\BPspear		
	\BPchariot		\BPhorse		\BPsword		

These symbols must appear either within the argument to `\textlinb` or following the `\linbfamily` font-selection command within a scope.

Table 277: linearb Unidentified Linear B Symbols

	\BUi		\BUiv		\BUvii		\BUx		\Btwe
	\BUii		\BUv		\BUviii		\BUxi		
	\BUiii		\BUvi		\BUix		\BUxii		

These symbols must appear either within the argument to `\textlinb` or following the `\linbfamily` font-selection command within a scope.

Table 278: cypriot Cypriot Letters

	\Ca		\Cku		\Cmu		\Cpo		\Cso		\Cwi
	\Ce		\Cla		\Cna		\Cpu		\Csu		\Cwo
	\Cga		\Cle		\Cne		\Cra		\Cta		\Cxa
	\Ci		\Cli		\Cni		\Cre		\Cte		\Cxe
	\Cja		\Clo		\Cno		\Cri		\Cti		\Cya
	\Cjo		\Clu		\Cnu		\Cro		\Cto		\Cyo
	\Cka		\Cma		\Co		\Cru		\Ctu		\Cza
	\Cke		\Cme		\Cpa		\Csa		\Cu		\Czo
	\Cki		\Cmi		\Cpe		\Cse		\Cwa		
	\Cko		\Cmo		\Cpi		\Csi		\Cwe		

These symbols must appear either within the argument to `\textcypr` or following the `\cyprfamily` font-selection command within a scope. Single-character shortcuts are also supported: Both "`\textcypr{\Cpa\Cki\Cna}`" and "`\textcypr{pcn}`" produce "", for example. See the cypriot documentation for more information.

Table 279: sarabian South Arabian Letters

𐩠	\SAa	𐩷	\SAz	𐩣	\SAm	𐩹	\SAsd	𐩢	\SAdb
𐩡	\SAb	𐩦	\SAhd	𐩤	\SAn	𐩺	\SAq	𐩯	\SAtb
𐩫	\SAg	𐩻	\SAtd	𐩧	\SAs	𐩩	\SAr	𐩬	\SAga
𐩵	\SAd	𐩰	\SAy	𐩱	\SAf	𐩴	\SAsv	𐩸	\SAzd
𐩲	\SAh	𐩴	\SAk	𐩵	\SAlq	𐩧	\SAt	𐩽	\SAsa
𐩮	\SAw	𐩫	\SAl	𐩵	\SAo	𐩶	\SAhu	𐩣	\SAdd

These symbols must appear either within the argument to \textsarab or following the \sarabfamily font-selection command within a scope. Single-character shortcuts are also supported: Both "\textsarab{\SAb\SAk\SAn}" and "\textsarab{bkn}" produce "𐩡𐩴𐩤", for example. See the sarabian documentation for more information.

Table 280: teubner Archaic Greek Letters and Greek Numerals

Ϙ	\Coppa†	Ϝ	\Digamma*	ϡ	\sampi*	ϛ	\varstigma
ϙ	\coppa†	ͱ	\koppa*	Ϛ	\Stigma		
ϝ	\digamma*,‡	ͳ	\Sampi	ϛ	\stigma*		

* Technically, these symbols do not require teubner; it is sufficient to load the babel package with the greek option (upon which teubner depends)—but use \qoppa for \koppa and \ddigamma for \digamma.

† For compatibility with other naming conventions teubner defines \Koppa as a synonym for \Coppa and \varcoppa as a synonym for \coppa.

‡ If both teubner and amssymb are loaded, teubner's \digamma replaces amssymb's \digamma, regardless of package-loading order.

7 Other symbols

The following are all the symbols that didn't fit neatly or unambiguously into any of the previous sections. (Do weather symbols belong under "Science and technology"? Should dice be considered "mathematics"?) While some of the tables contain clearly related groups of symbols (e.g., musical notes), others represent motley assortments of whatever the font designer felt like drawing.

Table 281: textcomp Genealogical Symbols

⋆	\textborn	⚮	\textdivorced	⚭	\textmarried
†	\textdied		\textleaf		

Table 282: wasysym General Symbols

	\ataribox	◷	\clock	◀	\LEFTarrow	☺	\smiley
	\bell	⌀	\diameter	ϟ	\lightning	☼	\sun
☻	\blacksmiley	▼	\DOWNarrow	☎	\phone	▲	\UParrow
⋈	\Bowtie	☹	\frownie	➪	\pointer	⌑	\wasylozenge
¦	\brokenvert	⦸	\invdiameter	⌕	\recorder		
✓	\checked	✠	\kreuz	▶	\RIGHTarrow		

Table 283: wasysym Circles

●	\CIRCLE	◐	\LEFTcircle	◑	\RIGHTcircle	↻	\rightturn
○	\Circle	◖	\Leftcircle	◗	\Rightcircle		
◖	\LEFTCIRCLE	◗	\RIGHTCIRCLE	↺	\leftturn		

Table 284: wasysym Musical Symbols

♪	\eighthnote	𝅗𝅥	\halfnote	♫	\twonotes	𝅝	\fullnote	♩	\quarternote

See also \flat, \sharp, and \natural (Table 201 on page 73).

Table 285: arev Musical Symbols

♩	\quarternote	♪	\eighthnote	♬	\sixteenthnote

See also \flat, \sharp, and \natural (Table 201 on page 73).

TABLE 286: harmony Musical Symbols

	\AAcht		\DDohne		\Halb		\SechBR	>	\VM
	\Acht		\Dohne		\HaPa		\SechBr		\Zwdr
	\AchtBL		\Ds	.	\Pu		\SePa		\ZwPa
	\AchtBR		\DS		\Sech	<	\UB		
	\AcPa		\Ganz		\SechBL		\Vier		
	\DD		\GaPa		\SechBl		\ViPa		

The musixtex package must be installed to use harmony.

TABLE 287: harmony Musical Accents

Âa	\Ferli{A}\Ferli{a}*	Âa	\Ohne{A}\Ohne{a}*
Âa	\Fermi{A}\Fermi{a}	A a	\Umd{A}\Umd{a}*
(A)(a)	\Kr{A}\Kr{a}		

* These symbols take an optional argument which shifts the accent either horizontally or vertically (depending on the command) by the given distance.

In addition to the accents shown above, \HH is a special accent command which accepts five period-separated characters and typesets them such that "\HH.X.a.b.c.d." produces "$\mathsf{X}_{a}^{\flat}$". All arguments except the first can be omitted: "\HH.X....." produces "X". \Takt takes two arguments and composes them into a musical time signature. For example, "\Takt{12}{8}" produces "$\frac{12}{8}$". As two special cases, "\Takt{c}{0}" produces "$\mathbf{C}$" and "\Takt{c}{1}" produces "$\mathbf{¢}$".

The musixtex package must be installed to use harmony.

TABLE 288: manfnt Dangerous Bend Symbols

\dbend \lhdbend \reversedvideodbend

Note that these symbols descend far beneath the baseline. manfnt also defines non-descending versions, which it calls, correspondingly, \textdbend, \textlhdbend, and \textreversedvideodbend.

TABLE 289: Miscellaneous manfnt Symbols

	\manboldkidney		\manpenkidney
	\manconcentriccircles		\manquadrifolium
	\manconcentricdiamond		\manquartercircle
	\mancone		\manrotatedquadrifolium
	\mancube		\manrotatedquartercircle
	\manerrarrow		\manstar
	\manfilledquartercircle		\mantiltpennib
	\manhpennib		\mantriangledown
	\manimpossiblecube		\mantriangleright
	\mankidney		\mantriangleup
	\manlhpenkidney		\manvpennib

TABLE 290: marvosym Navigation Symbols

▶	\Forward	▼	\MoveDown	⏮	\RewindToIndex	⏫	\ToTop
⏭	\ForwardToEnd	▲	\MoveUp	⏮	\RewindToStart		
⏭	\ForwardToIndex	◀	\Rewind	⏬	\ToBottom		

TABLE 291: marvosym Laundry Symbols

	\AtForty		\Handwash		\ShortNinetyFive
	\AtNinetyFive		\IroningI		\ShortSixty
	\AtSixty		\IroningII		\ShortThirty
△	\Bleech		\IroningIII		\SpecialForty
Ⓐ	\CleaningA		\NoBleech		\Tumbler
Ⓕ	\CleaningF		\NoChemicalCleaning		\WashCotton
Ⓕ	\CleaningFF		\NoIroning		\WashSynthetics
Ⓟ	\CleaningP		\NoTumbler		\WashWool
Ⓟ	\CleaningPP		\ShortFifty		
	\Dontwash		\ShortForty		

TABLE 292: marvosym Information Symbols

	\Bicycle		\Football	☞	\Pointinghand
☑	\Checkedbox		\Gentsroom		\Wheelchair
	\Clocklogo		\Industry	✍	\Writinghand
	\Coffeecup		\Info		
☒	\Crossedbox		\Ladiesroom		

Table 293: Other marvosym Symbols

☥	\Ankh	✝	\Cross	♡	\Heart	☺	\Smiley
	\Bat		\FHBOlogo		\MartinVogel		\Womanface
	\Bouquet		\FHBOLOGO		\Mundus		\Yinyang
✞	\Celtcross		\Frowny	@	\MVAt		
Ⓐ	\CircledA		\FullFHBO	➔	\MVRightarrow		

Table 294: Miscellaneous universa Symbols

\bauforms \bauhead

Table 295: Miscellaneous universal Symbols

	\baudash		\bauforms		\bauquarter		\varQ
	\bauequal		\bauhead		\bauquestion		
	\bauface		\bauplus		\bauwindow		

Table 296: Miscellaneous fourier Symbols

	\bomb		\grimace		\textthing*		\textxswup*
⚠	\danger		\noway		\textxswdown*		

* fourier defines math-mode aliases for a few of the preceding symbols: \thething (“”), \xswordsup (“”), and \xswordsdown (“”).

Table 297: ifsym Weather Symbols

	\Cloud		\Hail		\Sleet		\WeakRain
	\FilledCloud		\HalfSun		\Snow		\WeakRainCloud
	\FilledRainCloud		\Lightning		\SnowCloud		\FilledSnowCloud
	\FilledSunCloud		\NoSun		\Sun		
	\FilledWeakRainCloud		\Rain		\SunCloud		
	\Fog		\RainCloud		\ThinFog		

In addition, \Thermo{0}…\Thermo{6} produce thermometers that are between 0/6 and 6/6 full of mercury:

Similarly, \wind{⟨*sun*⟩}{⟨*angle*⟩}{⟨*strength*⟩} will draw wind symbols with a given amount of sun (0–4), a given angle (in degrees), and a given strength in km/h (0–100). For example, \wind{0}{0}{0} produces “”, \wind{2}{0}{0} produces “”, and \wind{4}{0}{100} produces “”.

Table 298: ifsym Alpine Symbols

	\SummitSign		\Summit		\SurveySign		\HalfFilledHut
	\StoneMan		\Mountain		\Joch		\VarSummit
	\Hut		\IceMountain		\Flag		
	\FilledHut		\VarMountain		\VarFlag		
	\Village		\VarIceMountain		\Tent		

Table 299: ifsym Clocks

	\Interval		\StopWatchStart		\VarClock		\Wecker
	\StopWatchEnd		\Taschenuhr		\VarTaschenuhr		

ifsym also exports a \showclock macro. \showclock{⟨*hours*⟩}{⟨*minutes*⟩} outputs a clock displaying the corresponding time. For instance, "\showclock{5}{40}" produces "". ⟨*hours*⟩ must be an integer from 0 to 11, and ⟨*minutes*⟩ must be an integer multiple of 5 from 0 to 55.

Table 300: Other ifsym Symbols

	\FilledSectioningDiamond		\Letter		\Radiation
	\Fire		\PaperLandscape		\SectioningDiamond
	\Irritant		\PaperPortrait		\Telephone
	\Cube{1}		\Cube{3}		\Cube{5}
	\Cube{2}		\Cube{4}		\Cube{6}
	\StrokeOne		\StrokeThree		\StrokeFive
	\StrokeTwo		\StrokeFour		

Table 301: clock Clocks

\ClockStyle	\ClockFramefalse	\ClockFrametrue
0		
1		
2		
3		

The clock package provides a \clock command to typeset an arbitrary time on an analog clock (and \clocktime to typeset the document's build time). For example, the clocks in the above table were produced with \clock{15}{41}. Clock symbols are composed from a font of clock-face fragments using one of four values for \ClockStyle and either \ClockFrametrue or \ClockFrametrue as illustrated above. See the clock documentation for more information.

Table 302: epsdice Dice

⚀	`\epsdice{1}`	⚂	`\epsdice{3}`	⚄	`\epsdice{5}`
⚁	`\epsdice{2}`	⚃	`\epsdice{4}`	⚅	`\epsdice{6}`

Table 303: hhcount Dice

⚀	`\fcdice{1}`	⚂	`\fcdice{3}`	⚄	`\fcdice{5}`
⚁	`\fcdice{2}`	⚃	`\fcdice{4}`	⚅	`\fcdice{6}`

The `\fcdice` command accepts values larger than 6. For example, "`\fcdice{47}`" produces "⚃⚃⚃⚃⚃⚃⚃⚃⚃⚄".

Table 304: hhcount Tally Markers

𝍠	`\fcscore{1}`	𝍡	`\fcscore{3}`	𝍢	`\fcscore{5}`
𝍣	`\fcscore{2}`	𝍤	`\fcscore{4}`		

The `\fcscore` command accepts values larger than 5. For example, "`\fcscore{47}`" produces "𝍢𝍢𝍢𝍢𝍢𝍢𝍢𝍢𝍢𝍣".

Table 305: skull Symbols

☠	`\skull`

Table 306: Non-Mathematical mathabx Symbols

𝍐	`\rip`

Table 307: skak Chess Informator Symbols

∓	\bbetter	⩲	\doublepawns	○‥○	\seppawns
−+	\bdecisive	⊥	\ending	O-O	\shortcastling
⩱	\betteris	=	\equal	⊕	\timelimit
⧉	\bishoppair	⇔	\file	∞	\unclear
∓	\bupperhand	»	\kside	○○	\unitedpawns
×	\capturesymbol	O-O-O	\longcastling	R	\various
O	\castlingchar	✕	\markera	±	\wbetter
-	\castlinghyphen	O	\markerb	+−	\wdecisive
⊞	\centre	#	\mate	⩻	\weakpt
+	\checksymbol	>	\morepawns	∟	\with
RR	\chesscomment	○	\moreroom	→	\withattack
‖	\chessetc	N	\novelty	△	\withidea
—	\chesssee	□	\onlymove	↑	\withinit
⩰	\compensation	⧉	\opposbishops	⌋	\without
⇆	\counterplay	♙	\passedpawn	±	\wupperhand
↻	\devadvantage	«	\qside	⊙	\zugzwang
↗	\diagonal	▞	\samebishops		

Table 308: skak Chess Pieces and Chessboard Squares

	\BlackBishopOnBlack		\BlackRookOnBlack		\WhiteKingOnBlack
	\BlackBishopOnWhite		\BlackRookOnWhite		\WhiteKingOnWhite
	\BlackEmptySquare		\symbishop		\WhiteKnightOnBlack
	\BlackKingOnBlack		\symking		\WhiteKnightOnWhite
	\BlackKingOnWhite		\symknight		\WhitePawnOnBlack
	\BlackKnightOnBlack		\sympawn		\WhitePawnOnWhite
	\BlackKnightOnWhite		\symqueen		\WhiteQueenOnBlack
	\BlackPawnOnBlack		\symrook		\WhiteQueenOnWhite
	\BlackPawnOnWhite		\WhiteBishopOnBlack		\WhiteRookOnBlack
	\BlackQueenOnBlack		\WhiteBishopOnWhite		\WhiteRookOnWhite
	\BlackQueenOnWhite		\WhiteEmptySquare		

The skak package also provides commands for drawing complete chessboards. See the skak documentation for more information.

Table 309: igo Go Stones

⓿	\blackstone[\igocircle]	◎	\whitestone[\igocircle]
⊗	\blackstone[\igocross]	⊗	\whitestone[\igocross]
●	\blackstone[\igonone]	○	\whitestone[\igonone]
▣	\blackstone[\igosquare]	▣	\whitestone[\igosquare]
◬	\blackstone[\igotriangle]	◬	\whitestone[\igotriangle]

In addition to the symbols shown above, igo's \blackstone and \whitestone commands accept numbers from 1 to 99 and display them circled as ❶, ❷, ❸, … ⓽⓽ and ①, ②, ③, … ⑨⑨, respectively.

The igo package is intended to typeset Go boards (goban). See the igo documentation for more information.

Table 310: metre Metrical Symbols

×	\a	⩙	\bBm	‖	\cc	⩗	\Mbb	⋮	\Pppp	⊗	\t
◡	\B	⩚	\bbm	⫴	\Ccc	⩘	\mbbx	⋮	\pppp	⎽	\tsbm
◡	\b	⩛	\Bbm	_	\m	○○	\oo	⋮	\Ppppp	⎵	\tsmb
◡	\Bb	⩖	\bbmb	ˏ	\M	.	\p	⋮	\ppppp	⎵	\tsmm
◡	\BB	⩘	\bbmx	×	\ma	˙	\pm	␣␣	\ps	⁝	\vppm
◡	\bb	⩒	\bm	⩌	\Mb	:	\pp	:	\pxp	⁞	\vpppm
◡	\bB	⩓	\Bm	⩏	\mb	:	\Pp	:	\Pxp	::	\x
⩙	\bba	|	\c	⩍	\mBb	¨	\ppm	∼	\R		
⩏	\bbb	|	\C	⩎	\mbB	⋮	\ppp	∼	\r		
⩛	\BBm	‖	\Cc	⩏	\mbb	⋮	\Ppp	⊗	\T		

The preceding symbols are valid only within the argument to the metre command.

Table 311: metre Small and Large Metrical Symbols

÷	\anaclasis	÷	\Anaclasis
<	\antidiple	<	\Antidiple
≮	\antidiple*	≮	\Antidiple*
⊃	\antisigma	⊃	\Antisigma
※	\asteriscus	※	\Asteriscus
∧	\catalexis	∧	\Catalexis
>	\diple	>	\Diple
≯	\diple*	≯	\Diple*
—	\obelus	—	\Obelus
÷	\obelus*	÷	\Obelus*
∼	\respondens	∼	\Respondens
⊗	\terminus	⊗	\Terminus
⊕	\terminus*	⊕	\Terminus*

TABLE 312: teubner Metrical Symbols

∞	\aeolicbii	⏑	\barbrevis	⁺	\ipercatal
∞∞	\aeolicbiii	⏑⏑	\bbrevis	‗	\longa
∞∞∞	\aeolicbiv	⏑	\brevis	⏑‗⏑	\ubarbbrevis
×	\anceps	^	\catal	⏑‗	\ubarbrevis
×̆	\ancepsdbrevis	⌒	\corona	⏑‗⏑	\ubarsbrevis
×̄	\banceps	⏑	\coronainv	⏑	\ubrevislonga
⏓	\barbbrevis	H	\hiatus		

The teubner package provides a \newmetrics command that helps users combine the preceding symbols as well as other teubner symbols. For example, the predefined \pentam symbol uses \newmetrics to juxtapose six \longas, two \barbbrevises, four \brevises, and a \dBar into "‗⏓‗⏓‗||‗⏑⏑‗⏑⏑‗". See the teubner documentation for more information.

TABLE 313: dictsym Dictionary Symbols

	\dsaeronautical		\dscommercial		\dsmedical
	\dsagricultural		\dsheraldical		\dsmilitary
	\dsarchitectural		\dsjuridical		\dsrailways
	\dsbiological		\dsliterary		\dstechnical
	\dschemical		\dsmathematical		

TABLE 314: simpsons Characters from *The Simpsons*

\Bart

\Homer

\Maggie

\SNPP

\Burns

\Lisa

\Marge

The location of the characters' pupils can be controlled with the \Goofy command. See *A METAFONT of 'Simpsons' characters* [Che97] for more information. Also, each of the above can be prefixed with \Left to make the character face left instead of right:

\Left\Bart

TABLE 315: pmboxdraw Box-Drawing Symbols

\textblock	╒	\textSFli	╤	\textSFxli	╣	\textSFxxiii
\textdkshade	╓	\textSFlii	╠	\textSFxlii	║	\textSFxxiv
\textdnblock	╫	\textSFliii	═	\textSFxliii	╗	\textSFxxv
\textlfblock	╪	\textSFliv	╬	\textSFxliv	╝	\textSFxxvi
\textltshade	┼	\textSFv	╩	\textSFxlix	╜	\textSFxxvii
\textrtblock	╥	\textSFvi	╧	\textSFxlv	╛	\textSFxxviii
┌	\textSFi	╨	\textSFvii	╨	\textSFxlvi	╓	\textSFxxxix
└	\textSFii	├	\textSFviii	╤	\textSFxlvii	╞	\textSFxxxvi
┐	\textSFiii	─	\textSFx	╥	\textSFxlviii	╟	\textSFxxxvii
┘	\textSFiv	│	\textSFxi	╢	\textSFxx	╚	\textSFxxxviii
┤	\textSFix	╡	\textSFxix	╖	\textSFxxi	▒	\textshade
╘	\textSFl	╙	\textSFxl	╕	\textSFxxii	▀	\textupblock

Code Page 437 (CP437), which was first utilized by the original IBM PC, contains the set of box-drawing symbols (sides, corners, and intersections of single- and double-ruled boxes) shown above in character positions 176–223. These symbols also appear in the Unicode Box Drawing and Block Element tables.

The pmboxdraw package draws the CP437 box-drawing symbols using TEX rules (specifically, \vrule) instead of with a font and thereby provides the ability to alter both rule width and the separation between rules. See the pmboxdraw documentation for more information.

TABLE 316: staves Magical Staves

	\staveI		\staveXXIV		\staveXLVII
	\staveII		\staveXXV		\staveXLVIII
	\staveIII		\staveXXVI		\staveXLIX
	\staveIV		\staveXXVII		\staveL
	\staveV		\staveXXVIII		\staveLI
	\staveVI		\staveXXIX		\staveLII
	\staveVII		\staveXXX		\staveLIII
	\staveVIII		\staveXXXI		\staveLIV
	\staveIX		\staveXXXII		\staveLV

(continued on next page)

(continued from previous page)

	\staveX		\staveXXXIII		\staveLVI
	\staveXI		\staveXXXIV		\staveLVII
	\staveXII		\staveXXXV		\staveLVIII
	\staveXIII		\staveXXXVI		\staveLIX
	\staveXIV		\staveXXXVII		\staveLX
	\staveXV		\staveXXXVIII		\staveLXI
	\staveXVI		\staveXXXIX		\staveLXII
	\staveXVII		\staveXL		\staveLXIII
	\staveXVIII		\staveXLI		\staveLXIV
	\staveXIX		\staveXLII		\staveLXV
	\staveXX		\staveXLIII		\staveLXVI
	\staveXXI		\staveXLIV		\staveLXVII
	\staveXXII		\staveXLV		\staveLXVIII
	\staveXXIII		\staveXLVI		

The meanings of these symbols are described on the Web site for the Museum of Icelandic Sorcery and Witchcraft at `http://www.galdrasyning.is/index.php?option=com_content&task=category&sectionid=5&id=18&Itemid=60` (TinyURL: `http://tinyurl.com/25979m`). For example, `\staveL` (“ ”) is intended to ward off ghosts and evil spirits.

Table 317: pigpen Cipher Symbols

⌟	{\pigpenfont A}	⌟·	{\pigpenfont J}	∨	{\pigpenfont S}
⌞⌟	{\pigpenfont B}	⌞⌟·	{\pigpenfont K}	>	{\pigpenfont T}
⌞	{\pigpenfont C}	⌞·	{\pigpenfont L}	<	{\pigpenfont U}
⌝	{\pigpenfont D}	⌝·	{\pigpenfont M}	∧	{\pigpenfont V}
⌞⌝	{\pigpenfont E}	⌞⌝·	{\pigpenfont N}	∨	{\pigpenfont W}
⌜⌟	{\pigpenfont F}	⌜⌟·	{\pigpenfont O}	>	{\pigpenfont X}
⌜	{\pigpenfont G}	⌜·	{\pigpenfont P}	<	{\pigpenfont Y}
⌜⌝	{\pigpenfont H}	⌜⌝·	{\pigpenfont Q}	∧	{\pigpenfont Z}
⌜⌞	{\pigpenfont I}	⌜⌞·	{\pigpenfont R}		

Table 318: GnuPA2e Phases of the Moon

● \MoonPha{1} ◗ \MoonPha{2} ☹ \MoonPha{3} ☾ \MoonPha{4}

TABLE 319: Other LaTeX2e Symbols

	`\Greenpoint`		`\Postbox`		`\Telephone`
	`\Info`		`\Request`		

TABLE 320: recycle Recycling Symbols

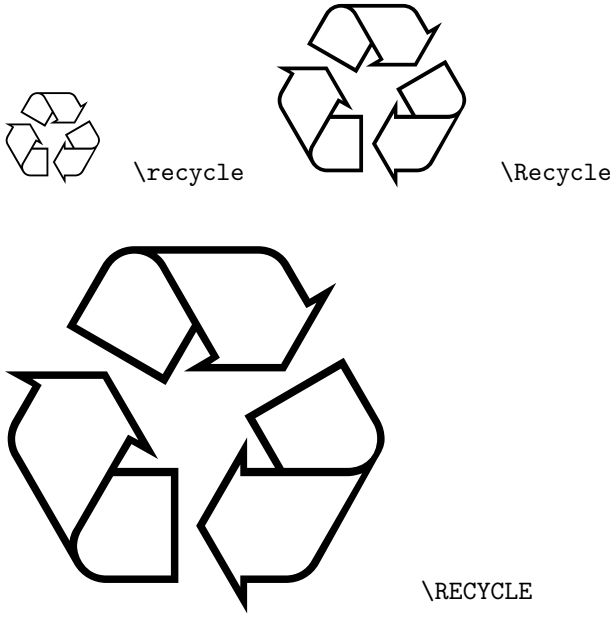

The METAFONT code that implements the recycling symbols shown above is, in the words of its author, "awful code [that] doesn't even put the logo in a box (properly)". Expect to receive "`Inconsistent equation (off by` ⟨*number*⟩`)`" errors from METAFONT. Fortunately, if you tell METAFONT to proceed past those errors (e.g., by pressing Enter after each one or by specifying "`-interaction=nonstopmode`" on the METAFONT command line) it should produce a valid font.

The commands listed above should be used within a group (e.g., "`{\recycle}`") because they exhibit the side effect of *changing* the font to the recycle font.

8 Additional Information

Unlike the previous sections of this document, Section 8 does not contain new symbol tables. Rather, it provides additional help in using the Comprehensive LaTeX Symbol List. First, it draws attention to symbol names used by multiple packages. Next, it provides some guidelines for finding symbols and gives some examples regarding how to construct missing symbols out of existing ones. Then, it comments on the spacing surrounding symbols in math mode. After that, it presents an ASCII and Latin 1 quick-reference guide, showing how to enter all of the standard ASCII/Latin 1 symbols in LaTeX. And finally, it lists some statistics about this document itself.

8.1 Symbol Name Clashes

Unfortunately, a number of symbol names are not unique; they appear in more than one package. Depending on how the symbols are defined in each package, LaTeX will either output an error message or replace an earlier-defined symbol with a later-defined symbol. Table 321 on the following page presents a selection of name clashes that appear in this document.

Using multiple symbols with the same name in the same document—or even merely loading conflicting symbol packages—can be tricky but, as evidenced by the existence of Table 321, not impossible. The general procedure is to load the first package, rename the conflicting symbols, and then load the second package. Examine the LaTeX source for this document (`symbols.tex`) for examples of this and other techniques for handling symbol conflicts. Note that `symbols.tex`'s `\savesymbol` and `\restoresymbol` macros have been extracted into the savesym package, which can be downloaded from CTAN.

txfonts and pxfonts redefine a huge number of symbols—essentially, all of the symbols defined by latexsym, textcomp, the various $\mathcal{AMS}$ symbol sets, and LaTeX 2_ε itself. Similarly, mathabx redefines a vast number of math symbols in an attempt to improve their look. The txfonts, pxfonts, and mathabx conflicts are not listed in Table 321 because they are designed to be compatible with the symbols they replace. Table 322 on page 112 illustrates what "compatible" means in this context.

To use the new txfonts/pxfonts symbols without altering the document's main font, merely reset the default font families back to their original values after loading one of those packages:

```
\renewcommand\rmdefault{cmr}
\renewcommand\sfdefault{cmss}
\renewcommand\ttdefault{cmtt}
```

8.2 Resizing symbols

Mathematical symbols listed in this document as "variable-sized" are designed to stretch vertically. Each variable-sized symbol comes in one or more basic sizes plus a variation comprising both stretchable and nonstretchable segments. Table 323 on page 112 presents the symbols `\}` and `\uparrow` in their default size, in their `\big`, `\Big`, `\bigg`, and `\Bigg` sizes, in an even larger size achieved using `\left`/`\right`, and—for contrast—in a large size achieved by changing the font size using LaTeX 2_ε's `\fontsize` command. Because the symbols shown belong to the Computer Modern family, the type1cm package needs to be loaded to support font sizes larger than 24.88 pt.

Note how `\fontsize` makes the symbol wider and thicker. (The graphicx package's `\scalebox` or `\resizebox` commands would produce a similar effect.) Also, the `\fontsize`-enlarged symbol is vertically centered relative to correspondingly large text, unlike the symbols enlarged using `\big` et al. or `\left`/`\right`, which all use the same math axis regardless of symbol size. However, `\fontsize` is not limited to mathematical delimiters. Also, `\scalebox` and `\resizebox` are more robust to poorly composed symbols (e.g., two symbols made to overlap by backspacing a fixed distance) but do not work with every TeX backend and will produce jagged symbols when scaling a bitmapped font.

All variable-sized delimiters are defined (by the corresponding `.tfm` file) in terms of up to five segments, as illustrated by Figure 1 on page 112. The top, middle, and bottom segments are of a fixed size. The top-middle and middle-bottom segments (which are constrained to be the same character) are repeated as many times as necessary to achieve the desired height.

TABLE 321: Symbol Name Clashes

Symbol	LaTeX 2ε	AMS	stmaryrd	wasysym	mathabx	marvosym	bbding	ifsym	dingbat	wsuipa
\baro			ϕ							ɵ
\bigtriangledown	▽		▽							
\bigtriangleup	△		△							
\checkmark		✓							✓	
\Circle				○				○		
\Cross						†	†	×		
\ggg		⋙			⩾					
\Letter						✉		✉		
\lightning			↯	↯						
\Lightning										
\lll		⋘			⩽					
\Square				□			□	□		
\Sun					⊙	☉		☼		
\TriangleDown							▼	▽		
\TriangleUp							▲	△		

TABLE 322: Example of a Benign Name Clash

Symbol	Default (Computer Modern)	txfonts (Times Roman)
`\R`	$\R$	$\R$
`\textrecipe`	$\Rx$	$\Rx$

TABLE 323: Sample resized delimiters

Symbol	Default size	`\big`	`\Big`	`\bigg`	`\Bigg`	`\left` / `\right`	`\fontsize`
`\}`	$\}$	$\big\}$	$\Big\}$	$\bigg\}$	$\Bigg\}$	$\left\}\vphantom{\rule{0pt}{2.4em}}\right.$	$\fontsize{30}{36}\selectfont\}$
`\uparrow`	$\uparrow$	$\big\uparrow$	$\Big\uparrow$	$\bigg\uparrow$	$\Bigg\uparrow$	$\left\uparrow\vphantom{\rule{0pt}{2.4em}}\right.$	$\fontsize{30}{36}\selectfont\uparrow$

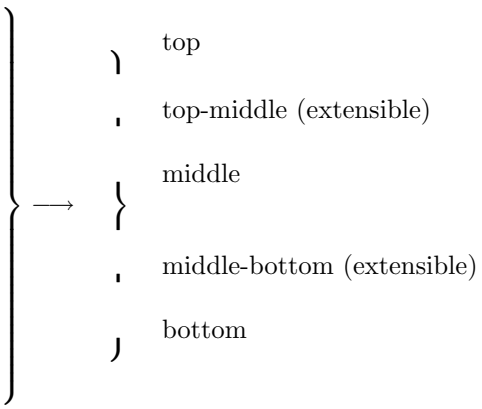

Figure 1: Implementation of variable-sized delimiters

8.3 Where can I find the symbol for . . . ?

If you can't find some symbol you're looking for in this document, there are a few possible explanations:

- The symbol isn't intuitively named. As a few examples, the ifsym command to draw dice is "`\Cube`"; a plus sign with a circle around it ("exclusive or" to computer engineers) is "`\oplus`"; and lightning bolts in fonts designed by German speakers may have "blitz" in their names as in the ulsy package. The moral of the story is to be creative with synonyms when searching the index.
- The symbol is defined by some package that I overlooked (or deemed unimportant). If there's some symbol package that you think should be included in the Comprehensive LaTeX Symbol List, please send me e-mail at the address listed on the title page.
- The symbol isn't defined in any package whatsoever.

Even in the last case, all is not lost. Sometimes, a symbol exists in a font, but there is no LaTeX binding for it. For example, the PostScript Symbol font contains a "↵" symbol, which may be useful for representing a carriage return, but there is no package (as far as I know) for accessing that symbol. To produce an unnamed symbol, you need to switch to the font explicitly with LaTeX 2ε's low-level font commands [LaT00] and use TeX's primitive `\char` command [Knu86a] to request a specific character number in the font.[5] In fact, `\char` is not strictly necesssary; the character can often be entered symbolically. For example, the symbol for an impulse train or Tate-Shafarevich group ("Ш") is actually an uppercase *sha* in the Cyrillic alphabet. (Cyrillic is supported by the OT2 font encoding, for instance). While a *sha* can be defined numerically as "`{\fontencoding{OT2}\selectfont\char88}`" it may be more intuitive to use the OT2 font encoding's "SH" ligature: "`{\fontencoding{OT2}\selectfont SH}`".

Reflecting and rotating existing symbols

A common request on `comp.text.tex` is for a reversed or rotated version of an existing symbol. As a last resort, these effects can be achieved with the graphicx (or graphics) package's `\reflectbox` and `\rotatebox` macros. For example, `\textsuperscript{\reflectbox{?}}` produces an irony mark ("⸮"; cf. `http://en.wikipedia.org/wiki/Irony_mark`), and `\rotatebox[origin=c]{180}{$\iota$}` produces the definite-description operator ("℩"). The disadvantage of the graphicx/graphics approach is that not every TeX backend handles graphical transformations.[6] Far better is to find a suitable font that contains the desired symbol in the correct orientation. For instance, if the phonetic package is available, then `\textit{\riota}` will yield a backend-independent "ɪ". Similarly, tipa's `\textrevepsilon` ("ɜ") or wsuipa's `\revepsilon` ("ɜ") may be used to express the mathematical notion of "such that" in a cleaner manner than with `\reflectbox` or `\rotatebox`.[7]

Joining and overlapping existing symbols

Symbols that do not exist in any font can sometimes be fabricated out of existing symbols. The LaTeX 2ε source file `fontdef.dtx` contains a number of such definitions. For example, `\models` (see Table 67 on page 34) is defined in that file with:

```
\def\models{\mathrel|\joinrel=}
```

where `\mathrel` and `\joinrel` are used to control the horizontal spacing. `\def` is the TeX primitive upon which LaTeX's `\newcommand` is based. See The TeXbook [Knu86a] for more information on all three of those commands.

With some simple pattern-matching, one can easily define a backward `\models` sign ("=|"):

```
\def\ismodeledby{=\joinrel\mathrel|}
```

[5] pifont defines a convenient `\Pisymbol` command for accessing symbols in PostScript fonts by number. For example, "`\Pisymbol{psy}{191}`" produces "↵".

[6] As an example, Xdvi ignores both `\reflectbox` and `\rotatebox`.

[7] More common symbols for representing "such that" include "`|`", "`:`", and "`s.t.`".

In general, arrows/harpoons, horizontal lines ("=", "-", "\relbar", and "\Relbar"), and the various math-extension characters can be combined creatively with miscellaneous other characters to produce a variety of new symbols. Of course, new symbols can be composed from *any* set of existing characters. For instance, LaTeX defines \hbar ("$\hbar$") as a "$^-$" character (\mathchar'26) followed by a backspace of 9 math units (\mkern-9mu), followed by the letter "h":

```
\def\hbar{{\mathchar'26\mkern-9muh}}
```

We can just as easily define other barred letters:

```
\def\bbar{{\mathchar'26\mkern-9mu b}}
\def\dbar{{\mathchar'26\mkern-12mu d}}
```

(The space after the "mu" is optional but is added for clarity.) \bbar and \dbar define "$\bar{b}$" and "$\bar{d}$", respectively. Note that \dbar requires a greater backward math kern than \bbar; a -9 mu kern would have produced the less-attractive "$\bar{d}$" glyph.

The amsmath package provides \overset and \underset commands for placing one symbol respectively above or below another. For example, \overset{G}{\sim}[8] produces "$\overset{G}{\sim}$" (sometimes used for "equidecomposable with respect to G").

Sometimes an ordinary tabular environment can be co-opted into juxtaposing existing symbols into a new symbol. Consider the following definition of \asterism ("⁂") from a June 2007 post to comp.text.tex by Peter Flynn:

```
\newcommand{\asterism}{\smash{%
   \raisebox{-.5ex}{%
     \setlength{\tabcolsep}{-.5pt}%
     \begin{tabular}{@{}cc@{}}%
       \multicolumn2c*\\[-2ex]*&*%
     \end{tabular}}}}
```

Note how the space between columns (\tabcolsep) and rows (\\[...]) is made negative to squeeze the asterisks closer together.

There is a TeX primitive called \mathaccent that centers one mathematical symbol atop another. For example, one can define \dotcup ("$\dot\cup$")—the composition of a \cup and a \cdot—as follows:

```
\newcommand{\dotcup}{\ensuremath{\mathaccent\cdot\cup}}
```

The catch is that \mathaccent requires the accent to be a "math character". That is, it must be a character in a math font as opposed to a symbol defined in terms of other symbols. See The TeXbook [Knu86a] for more information.

Another TeX primitive that is useful for composing symbols is \vcenter. \vcenter is conceptually similar to "\begin{tabular}{l}" in LaTeX but takes a list of vertical material instead of \\-separated rows. Also, it vertically centers the result on the math axis. (Many operators, such as "+" and "−" are also vertically centered on the math axis.) Enrico Gregorio posted the following symbol definition to comp.text.tex in March 2004 in response to a query about an alternate way to denote equivalence:

```
\newcommand*{\threesim}{%
  \mathrel{\vcenter{\offinterlineskip
  \hbox{$\sim$}\vskip-.35ex\hbox{$\sim$}\vskip-.35ex\hbox{$\sim$}}}}
```

The \threesim symbol, which vertically centers three \sim ("$\sim$") symbols with 0.35 x-heights of space between them, is rendered as "$\threesim$". \offinterlineskip is a macro that disables implicit interline spacing. Without it, \threesim would have a full line of vertical spacing between each \sim. Because of \vcenter, \threesim aligns properly with other math operators: $a \div b \threesim c \times d$.

[8] LaTeX's \stackrel command is similar but is limited to placing a symbol above a binary relation.

A related LaTeX command, borrowed from Plain TeX, is `\ooalign`. `\ooalign` vertically overlaps symbols and works both within and outside of math mode. Essentially, it creates a single-column `tabular` environment with zero vertical distance between rows. However, because it is based directly on TeX's `\ialign` primitive, `\ooalign` uses TeX's tabular syntax instead of LaTeX's (i.e., with `\cr` as the row terminator instead of `\\`). The following example of `\ooalign`, a macro that defines a standard-state symbol (`\stst`, "$^{\circ}$") as a superscripted Plimsoll line (`\barcirc`, "$\circ$"),[9] is due to an October 2007 `comp.text.tex` post by Donald Arseneau:

```
\makeatletter
\providecommand\barcirc{\mathpalette\@barred\circ}
\def\@barred#1#2{\ooalign{\hfil$#1-$\hfil\cr\hfil$#1#2$\hfil\cr}}
\newcommand\stst{^{\protect\barcirc}}
\makeatother
```

In the preceding code, note the `\ooalign` call's use of `\hfil` to horizontally center a minus sign ("−") and a `\circ` ("∘").

As another example of `\ooalign`, consider the following code (due to Enrico Gregorio in a June 2007 post to `comp.text.tex`) that overlaps a `\ni` ("∋") and two minus signs ("−") to produce "∍", an obscure variation on the infrequently used "ɜ" symbol for "such that"discussed on page 113:

```
\newcommand{\suchthat}{%
  \mathrel{\ooalign{$\ni$\cr\kern-1pt$-$\kern-6.5pt$-$}}}
```

The slashed package, although originally designed for producing Feynman slashed-character notation, in fact facilitates the production of *arbitrary* overlapped symbols. The default behavior is to overwrite a given character with "/". For example, `\slashed{D}` produces "$\not{D}$". However, the `\declareslashed` command provides the flexibility to specify the mathematical context of the composite character (operator, relation, punctuation, etc., as will be discussed in Section 8.4), the overlapping symbol, horizontal and vertical adjustments in symbol-relative units, and the character to be overlapped. Consider, for example, the symbol for reduced quadrupole moment ("$\not{I}$"). This can be declared as follows:

```
\newcommand{\rqm}{{%
  \declareslashed{}{\text{-}}{0.04}{0}{I}\slashed{I}}}
```

`\declareslashed{·}{·}{·}{·}{I}` affects the meaning of all subsequent `\slashed{I}` commands in the same scope. The preceding definition of `\rqm` therefore uses an extra set of curly braces to limit that scope to a single `\slashed{I}`. In addition, `\rqm` uses amstext's `\text` macro (described on page 117) to make `\declareslashed` use a text-mode hyphen ("-") instead of a math-mode minus sign ("−") and to ensure that the hyphen scales properly in size in subscripts and superscripts. See slashed's documentation (located in `slashed.sty` itself) for a detailed usage description of the `\slashed` and `\declareslashed` commands.

Somewhat simpler than slashed is the centernot package. centernot provides a single command, `\centernot`, which, like `\not`, puts a slash over the subsequent mathematical symbol. However, instead of putting the slash at a fixed location, `\centernot` centers the slash over its argument. `\centernot` might be used, for example, to create a "does not imply" symbol:

$\not\Longrightarrow$ `\not\Longrightarrow`

vs.

$\centernot\Longrightarrow$ `\centernot\Longrightarrow`

See the centernot documentation for more information.

[9] While `\barcirc` illustrates how to combine symbols using `\ooalign`, the stmaryrd package's `\minuso` command (Table 46 on page 25) provides a similar glyph ("$\circ$") as a single, indivisible symbol.

Making new symbols work in superscripts and subscripts

To make composite symbols work properly within subscripts and superscripts, you may need to use TEX's `\mathchoice` primitive. `\mathchoice` evaluates one of four expressions, based on whether the current math style is display, text, script, or scriptscript. (See The TEXbook [Knu86a] for a more complete description.) For example, the following LATEX code—posted to `comp.text.tex` by Torsten Bronger—composes a sub/superscriptable "$\perp$" symbol out of `\top` and `\bot` ("$\top$" and "$\bot$"):

```
\def\topbotatom#1{\hbox{\hbox to 0pt{$#1\bot$\hss}$#1\top$}}
\newcommand*{\topbot}{\mathrel{\mathchoice{\topbotatom\displaystyle}
                                  {\topbotatom\textstyle}
                                  {\topbotatom\scriptstyle}
                                  {\topbotatom\scriptscriptstyle}}}
```

The following is another example that uses `\mathchoice` to construct symbols in different math modes. The code defines a principal value integral symbol, which is an integral sign with a line through it.

```
\def\Xint#1{\mathchoice
   {\XXint\displaystyle\textstyle{#1}}%
   {\XXint\textstyle\scriptstyle{#1}}%
   {\XXint\scriptstyle\scriptscriptstyle{#1}}%
   {\XXint\scriptscriptstyle\scriptscriptstyle{#1}}%
   \!\int}
\def\XXint#1#2#3{{\setbox0=\hbox{$#1{#2#3}{\int}$}
     \vcenter{\hbox{$#2#3$}}\kern-.5\wd0}}
\def\ddashint{\Xint=}
\def\dashint{\Xint-}
```

(The preceding code was taken verbatim from the UK TEX Users' Group FAQ at `http://www.tex.ac.uk/faq`.) `\dashint` produces a single-dashed integral sign ("$⨍$"), while `\ddashint` produces a double-dashed one ("$⨎$"). The `\Xint` macro defined above can also be used to generate a wealth of new integrals: "$∲$" (`\Xint\circlearrowright`), "$∳$" (`\Xint\circlearrowleft`), "$⫣$" (`\Xint\subset`), "$⨜$" (`\Xint\infty`), and so forth.

LATEX 2ε provides a simple wrapper for `\mathchoice` that sometimes helps produce terser symbol definitions. The macro is called `\mathpalette` and it takes two arguments. `\mathpalette` invokes the first argument, passing it one of "`\displaystyle`", "`\textstyle`", "`\scriptstyle`", or "`\scriptscriptstyle`", followed by the second argument. `\mathpalette` is useful when a symbol macro must know which math style is currently in use (e.g., to set it explicitly within an `\mbox`). Donald Arseneau posted the following `\mathpalette`-based definition of a probabilistic-independence symbol ("$\perp\!\!\!\perp$") to `comp.text.tex` in June 2000:

```
\newcommand\independent{\protect\mathpalette{\protect\independenT}{\perp}}
\def\independenT#1#2{\mathrel{\rlap{$#1#2$}\mkern2mu{#1#2}}}
```

The `\independent` macro uses `\mathpalette` to pass the `\independenT` helper macro both the current math style and the `\perp` symbol. `\independenT` typesets `\perp` in the current math style, moves two math units to the right, and finally typesets a second—overlapping—copy of `\perp`, again in the current math style. `\rlap`, which enables text overlap, is described on the following page.

Some people like their square-root signs with a trailing "hook" (i.e., "$\sqrt{\ }$") as this helps visually distinguish expressions like "$\sqrt{3x}$" from those like "$\sqrt{3}x$". In March 2002, Dan Luecking posted a `\mathpalette`-based definition of a hooked square-root symbol to `comp.text.tex`:

```
\def\hksqrt{\mathpalette\DHLhksqrt}
\def\DHLhksqrt#1#2{\setbox0=\hbox{$#1\sqrt{#2\,}$}\dimen0=\ht0
  \advance\dimen0-0.2\ht0
  \setbox2=\hbox{\vrule height\ht0 depth -\dimen0}%
  {\box0\lower0.4pt\box2}}
```

Notice how `\DHLhksqrt` uses `\mathpalette` to recover the outer math style (argument `#1`) from within an `\hbox`. The rest of the code is simply using TEX primitives to position a hook of height 0.2 times the `\sqrt` height at the right of the `\sqrt`. See The TEXbook [Knu86a] for more understanding of TEX "boxes" and "dimens".

Sometimes, however, amstext's `\text` macro is all that is necessary to make composite symbols appear correctly in subscripts and superscripts, as in the following definitions of `\neswarrow` ("⤢") and `\nwsearrow` ("⤡"):[10]

```
\newcommand{\neswarrow}{\mathrel{\text{$\nearrow$\llap{$\swarrow$}}}}
\newcommand{\nwsearrow}{\mathrel{\text{$\nwarrow$\llap{$\searrow$}}}}
```

`\text` resembles LATEX's `\mbox` command but shrinks its argument appropriately when used within a subscript or superscript. `\llap` ("left overlap") and its counterpart, `\rlap` ("right overlap"), appear frequently when creating composite characters. `\llap` outputs its argument to the left of the current position, overlapping whatever text is already there. Similarly, `\rlap` overlaps whatever text would normally appear to the right of its argument. For example, "`A\llap{B}`" and "`\rlap{A}B`" each produce "AB". However, the result of the former is the width of "A", and the result of the latter is the width of "B"—`\llap{...}` and `\rlap{...}` take up zero space.

In a June 2002 post to `comp.text.tex`, Donald Arseneau presented a general macro for aligning an arbitrary number of symbols on their horizontal centers and vertical baselines:

```
\makeatletter
  \def\moverlay{\mathpalette\mov@rlay}
  \def\mov@rlay#1#2{\leavevmode\vtop{%
     \baselineskip\z@skip \lineskiplimit-\maxdimen
     \ialign{\hfil$#1##$\hfil\cr#2\crcr}}}
\makeatother
```

The `\makeatletter` and `\makeatother` commands are needed to coerce LATEX into accepting "`@`" as part of a macro name. `\moverlay` takes a list of symbols separated by `\cr` (TEX's equivalent of LATEX's `\\`). For example, the `\topbot` command defined on the previous page could have been expressed as "`\moverlay{\top\cr\bot}`" and the `\neswarrow` command defined above could have been expressed as "`\moverlay{\nearrow\cr\swarrow}`".

The basic concept behind `\moverlay`'s implementation is that `\moverlay` typesets the given symbols in a table that utilizes a zero `\baselineskip`. This causes every row to be typeset at the same vertical position. See The TEXbook [Knu86a] for explanations of the TEX primitives used by `\moverlay`.

Modifying LATEX-generated symbols

Oftentimes, symbols composed in the LATEX 2_ε source code can be modified with minimal effort to produce useful variations. For example, `fontdef.dtx` composes the `\ddots` symbol (see Table 189 on page 70) out of three periods, raised 7 pt., 4 pt., and 1 pt., respectively:

```
\def\ddots{\mathinner{\mkern1mu\raise7\p@
    \vbox{\kern7\p@\hbox{.}}\mkern2mu
    \raise4\p@\hbox{.}\mkern2mu\raise\p@\hbox{.}\mkern1mu}}
```

`\p@` is a LATEX 2_ε shortcut for "`pt`" or "`1.0pt`". The remaining commands are defined in The TEXbook [Knu86a]. To draw a version of `\ddots` with the dots going along the opposite diagonal, we merely have to reorder the `\raise7\p@`, `\raise4\p@`, and `\raise\p@`:

```
\makeatletter
  \def\revddots{\mathinner{\mkern1mu\raise\p@
    \vbox{\kern7\p@\hbox{.}}\mkern2mu
    \raise4\p@\hbox{.}\mkern2mu\raise7\p@\hbox{.}\mkern1mu}}
\makeatother
```

`\revddots` is essentially identical to the mathdots package's `\iddots` command or the yhmath package's `\adots` command.

[10] Note that if your goal is to typeset commutative diagrams or pushout/pullback diagrams, then you should probably be using XY-pic.

Producing complex accents

Accents are a special case of combining existing symbols to make new symbols. While various tables in this document show how to add an accent to an existing symbol, some applications, such as transliterations from non-Latin alphabets, require *multiple* accents per character. For instance, the creator of pdfTEX writes his name as "Hàn Thế Thành". The dblaccnt package enables LATEX to stack accents, as in "`H\‘an Th\’{\^e} Th\‘anh`" (albeit not in the OT1 font encoding). In addition, the wsuipa package defines `\diatop` and `\diaunder` macros for putting one or more diacritics or accents above or below a given character. For example, `\diaunder[{\diatop[\’|\=]}|\textsubdot{r}]` produces "$\acute{\bar{\underset{\cdot}{\mathrm{r}}}}$". See the wsuipa documentation for more information.

The accents package facilitates the fabrication of accents in math mode. Its `\accentset` command enables *any* character to be used as an accent. For instance, `\accentset{\star}{f}` produces "$\overset{\star}{f}$" and `\accentset{e}{X}` produces "$\overset{e}{X}$". `\underaccent` does the same thing, but places the accent beneath the character. This enables constructs like `\underaccent{\tilde}{V}`, which produces "$\underset{\sim}{V}$". accents provides other accent-related features as well; see the documentation for more information.

Creating extensible symbols

A relatively simple example of creating extensible symbols stems from a `comp.text.tex` post by Donald Arseneau (June 2003). The following code defines an equals sign that extends as far to the right as possible, just like LATEX's `\hrulefill` command:

```
\makeatletter
\def\equalsfill{$\m@th\mathord=\mkern-7mu
  \cleaders\hbox{$\!\mathord=\!$}\hfill
  \mkern-7mu\mathord=$}
\makeatother
```

TEX's `\cleaders` and `\hfill` primitives are the key to understanding `\equalsfill`'s extensibility. Essentially, `\equalsfill` repeats a box containing "=" plus some negative space until it fills the maximum available horizontal space. `\equalsfill` is intended to be used with LATEX's `\stackrel` command, which stacks one mathematical expression (slightly reduced in size) atop another. Hence, "`\stackrel{a}{\rightarrow}`" produces "$\stackrel{a}{\rightarrow}$" and "X `\stackrel{\text{definition}}{\hbox{\equalsfill}}` Y" produces "$X \stackrel{\text{definition}}{=\!=\!=\!=\!=\!=\!=} Y$".

If all that needs to extend are horizontal and vertical lines—as opposed to repeated symbols such as the "=" in the previous example—LATEX's `array` or `tabular` environments may suffice. Consider the following code (due to a February 1999 `comp.text.tex` post by Donald Arseneau and subsequent modifications by Billy Yu and Scott Pakin) for typesetting annuity and life-insurance symbols:

```
\DeclareRobustCommand{\actuarial}[2][]{%
  \def\arraystretch{0}%
  \setlength\arraycolsep{0.5pt}%
  \setlength\arrayrulewidth{0.5pt}%
  \setbox0=\hbox{$\scriptstyle#1#2$}%
  \begin{array}[b]{*2{@{}>{\scriptstyle}c}|}
    \cline{2-2}%
    \rule[1.25pt]{0pt}{\ht0}%
    #1 & #2%
  \end{array}%
}
```

Using the preceding definition, one can type, e.g., "`$a_{\actuarial{n}}$`" to produce "$a_{\overline{n}|}$" and "`$a_{\actuarial[x:]{n}}$`" to produce "$a_{x:\overline{n}|}$"

A more complex example of composing accents is the following definition of extensible `\overbracket`, `\underbracket`, `\overparenthesis`, and `\underparenthesis` symbols, taken from a May 2002 `comp.text.tex` post by Donald Arseneau:

```
\makeatletter
\def\overbracket#1{\mathop{\vbox{\ialign{##\crcr\noalign{\kern3\p@}
      \downbracketfill\crcr\noalign{\kern3\p@\nointerlineskip}
      $\hfil\displaystyle{#1}\hfil$\crcr}}}\limits}
\def\underbracket#1{\mathop{\vtop{\ialign{##\crcr
      $\hfil\displaystyle{#1}\hfil$\crcr\noalign{\kern3\p@\nointerlineskip}
      \upbracketfill\crcr\noalign{\kern3\p@}}}}\limits}
\def\overparenthesis#1{\mathop{\vbox{\ialign{##\crcr\noalign{\kern3\p@}
      \downparenthfill\crcr\noalign{\kern3\p@\nointerlineskip}
      $\hfil\displaystyle{#1}\hfil$\crcr}}}\limits}
\def\underparenthesis#1{\mathop{\vtop{\ialign{##\crcr
      $\hfil\displaystyle{#1}\hfil$\crcr\noalign{\kern3\p@\nointerlineskip}
      \upparenthfill\crcr\noalign{\kern3\p@}}}}\limits}
\def\downparenthfill{$\m@th\braceld\leaders\vrule\hfill\bracerd$}
\def\upparenthfill{$\m@th\bracelu\leaders\vrule\hfill\braceru$}
\def\upbracketfill{$\m@th\makesm@sh{\llap{\vrule\@height3\p@\@width.7\p@}}%
  \leaders\vrule\@height.7\p@\hfill
  \makesm@sh{\rlap{\vrule\@height3\p@\@width.7\p@}}$}
\def\downbracketfill{$\m@th
  \makesm@sh{\llap{\vrule\@height.7\p@\@depth2.3\p@\@width.7\p@}}%
  \leaders\vrule\@height.7\p@\hfill
  \makesm@sh{\rlap{\vrule\@height.7\p@\@depth2.3\p@\@width.7\p@}}$}
\makeatother
```

Table 324 showcases these accents. The TEXbook [Knu86a] or another book on TEX primitives is indispensible for understanding how the preceding code works. The basic idea is that `\downparenthfill`, `\upparenthfill`, `\downbracketfill`, and `\upbracketfill` do all of the work; they output a left symbol (e.g., `\braceld` [“⎛”] for `\downparenthfill`), a horizontal rule that stretches as wide as possible, and a right symbol (e.g., `\bracerd` [“⎞”] for `\downparenthfill`). `\overbracket`, `\underbracket`, `\overparenthesis`, and `\underparenthesis` merely create a table whose width is determined by the given text, thereby constraining the width of the horizontal rules.

Table 324: Manually Composed Extensible Accents

$\overbracket{abc}$	`\overbracket{abc}`	$\overparenthesis{abc}$	`\overparenthesis{abc}`
$\underbracket{abc}$	`\underbracket{abc}`	$\underparenthesis{abc}$	`\underparenthesis{abc}`

Note that the simplewick package provides mechanisms for typesetting Wick contractions, which utilize `\overbracket`- and `\underbracket`-like brackets of variable width *and* height (or depth). For example, “`\acontraction{}{A}{B}{C}\acontraction[2ex]{A}{B}{C}{D}\bcontraction{}{A}{BC}{D}ABCD`” produces

$$\overbracket{A\overbracket{B\underbracket{C}D}}$$.

See the simplewick documentation for more information.

Developing new symbols from scratch

Sometimes is it simply not possible to define a new symbol in terms of existing symbols. Fortunately, most, if not all, TEX distributions are shipped with a tool called METAFONT which is designed specifically for creating fonts to be used with TEX. The METAFONTbook [Knu86b] is the authoritative text on METAFONT. If you plan to design your own symbols with METAFONT, The METAFONTbook is essential reading. You may also want to read the freely available METAFONT primer located at `http://metafont.tutorial.free.fr/`. The following is an extremely brief tutorial on how to create a new LATEX symbol using METAFONT. Its primary purpose is to

cover the LaTeX-specific operations not mentioned in The METAFONTbook and to demonstrate that symbol-font creation is not necessarily a difficult task.

Suppose we need a symbol to represent a light bulb ("💡").[11] The first step is to draw this in METAFONT. It is common to separate the font into two files: a size-dependent file, which specifies the design size and various font-specific parameters that are a function of the design size; and a size-independent file, which draws characters in the given size. Figure 2 shows the METAFONT code for `lightbulb10.mf`. `lightbulb10.mf` specifies various parameters that produce a 10 pt. light bulb then loads `lightbulb.mf`. Ideally, one should produce `lightbulb`⟨*size*⟩`.mf` files for a variety of ⟨*size*⟩s. This is called "optical scaling". It enables, for example, the lines that make up the light bulb to retain the same thickness at different font sizes, which looks much nicer than the alternative—and default—"mechanical scaling". When a `lightbulb`⟨*size*⟩`.mf` file does not exist for a given size ⟨*size*⟩, the computer mechanically produces a wider, taller, thicker symbol:

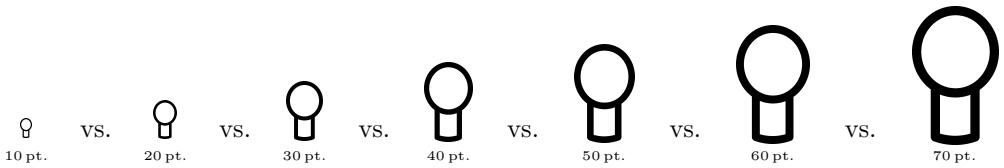


```
font_identifier := "LightBulb10";                    % Name the font.
font_size 10pt#;                                     % Specify the design size.

em# := 10pt#;                                        % "M" width is 10 points.
cap# := 7pt#;                                        % Capital letter height is 7 points above the baseline.
sb# := 1/4pt#;                                       % Leave this much space on the side of each character.
o# := 1/16pt#;                                       % Amount that curves overshoot borders.

input lightbulb                                      % Load the file that draws the actual glyph.
```

Figure 2: Sample METAFONT size-specific file (`lightbulb10.mf`)

`lightbulb.mf`, shown in Figure 3, draws a light bulb using the parameters defined in `lightbulb10.mf`. Note that the the filenames "`lightbulb10.mf`" and "`lightbulb.mf`" do not follow the Berry font-naming scheme [Ber01]; the Berry font-naming scheme is largely irrelevant for symbol fonts, which generally lack bold, italic, small-caps, slanted, and other such variants.

The code in Figures Figure 2 and Figure 3 is heavily commented and should demonstrate some of the basic concepts behind METAFONT usage: declaring variables, defining points, drawing lines and curves, and preparing to debug or fine-tune the output. Again, The METAFONTbook [Knu86b] is the definitive reference on METAFONT programming.

METAFONT can produce "proofs" of fonts—large, labeled versions that showcase the logical structure of each character. In fact, proof mode is METAFONT's default mode. To produce a proof of `lightbulb10.mf`, issue the following commands at the operating-system prompt:

```
prompt> mf lightbulb10.mf                ⇐ Produces lightbulb10.2602gf
prompt> gftodvi lightbulb10.2602gf       ⇐ Produces lightbulb10.dvi
```

You can then view `lightbulb10.dvi` with any DVI viewer. The result is shown in Figure 4. Observe how the grid defined with *makegrid* at the bottom of Figure 3 draws vertical lines at positions 0, sb, $w/2$, and $w - sb$ and horizontal lines at positions 0, $-1pt$, y_2, and h. Similarly, observe how the *penlabels* command labels all of the important coordinates: $z_1, z_2, \ldots, z_8$ and z_{67}, which `lightbulb.mf` defines to lie between z_6 and z_7.

Most, if not all, TeX distributions include a Plain TeX file called `testfont.tex` which is useful for testing new fonts in a variety of ways. One useful routine produces a table of all of the characters in the font:

```
prompt> tex testfont
```

[11] I'm not a very good artist; you'll have to pretend that "💡" looks like a light bulb.

```
mode_setup;                                          % Target a given printer.

define_pixels(em, cap, sb);                          % Convert to device-specific units.
define_corrected_pixels(o);                          % Same, but add a device-specific fudge factor.

%% Define a light bulb at the character position for "A"
%% with width 1/2em#, height cap#, and depth 1pt#.
beginchar("A", 1/2em#, cap#, 1pt#); "A light bulb";
    pickup pencircle scaled 1/2pt;                   % Use a pen with a small, circular tip.

    %% Define the points we need.
    top z1 = (w/2, h + o);                           % z1 is at the top of a circle.
    rt z2 = (w + sb + o - x4, y4);                   % z2 is at the same height as z4 but the opposite side.
    bot z3 = (z1 - (0, w - sb - o));                 % z3 is at the bottom of the circle.
    lft z4 = (sb - o, 1/2[y1, y3]);                  % z4 is on the left of the circle.
    path bulb;                                       % Define a path for the bulb itself.
    bulb = z1 .. z2 .. z3 .. z4 .. cycle;            % The bulb is a closed path.

    z5 = point 2 - 1/3 of bulb;                      % z5 lies on the bulb, a little to the right of z3.
    z6 = (x5, 0);                                    % z6 is at the bottom, directly under z5.
    z7 = (x8, 0);                                    % z7 is at the bottom, directly under z8.
    z8 = point 2 + 1/3 of bulb;                      % z8 lies on the bulb, a little to the left of z3.
    bot z67 = (1/2[x6, x7], pen_bot - o - 1/8pt);    % z67 lies halfway between z6 and z7 but a jot lower.

    %% Draw the bulb and the base.
    draw bulb;                                       % Draw the bulb proper.
    draw z5 -- z6 .. z67 .. z7 -- z8;                % Draw the base of the bulb.

    %% Display key positions and points to help us debug.
    makegrid(0, sb, w/2, w - sb)(0, -1pt, y2, h);    % Label "interesting" x and y coordinates.
    penlabels(1, 2, 3, 4, 5, 6, 67, 7, 8);           % Label control points for debugging.
endchar;
end
```

Figure 3: Sample METAFONT size-independent file (`lightbulb.mf`)

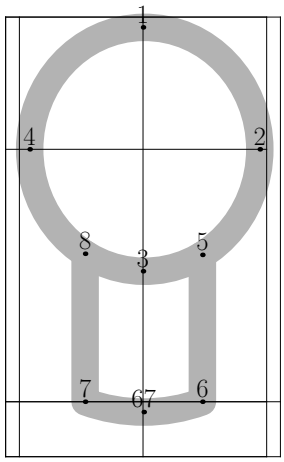

Figure 4: Proof diagram of `lightbulb10.mf`

```
This is TeX, Version 3.14159 (Web2C 7.3.1)
(/usr/share/texmf/tex/plain/base/testfont.tex
Name of the font to test = lightbulb10
Now type a test command (\help for help):)
*\table

*\bye
[1]
Output written on testfont.dvi (1 page, 1516 bytes).
Transcript written on testfont.log.
```

The resulting table, stored in `testfont.dvi` and illustrated in Figure 5, shows every character in the font. To understand how to read the table, note that the character code for "A"—the only character defined by `lightbulb10.mf`—is 41 in hexadecimal (base 16) and 101 in octal (base 8).

Test of lightbulb10 on March 11, 2003 at 1127

	´0	´1	´2	´3	´4	´5	´6	´7	
´10x									″4x
´11x									
	″8	″9	″A	″B	″C	″D	″E	″F	

Figure 5: Font table produced by `testfont.tex`

The LightBulb10 font is now usable by TEX. LATEX 2ε, however, needs more information before documents can use the font. First, we create a font-description file that tells LATEX 2ε how to map fonts in a given font family and encoding to a particular font in a particular font size. For symbol fonts, this mapping is fairly simple. Symbol fonts almost always use the "U" ("Unknown") font encoding and frequently occur in only one variant: normal weight and non-italicized. The filename for a font-description file important; it must be of the form "⟨*encoding*⟩⟨*family*⟩`.fd`", where ⟨*encoding*⟩ is the lowercase version of the encoding name (typically "u" for symbol fonts) and ⟨*family*⟩ is the name of the font family. For LightBulb10, let's call this "bulb". Figure 6 lists the contents of `ubulb.fd`. The document "LATEX 2ε Font Selection" [LAT00] describes `\DeclareFontFamily` and `\DeclareFontShape` in detail, but the gist of `ubulb.fd` is first to declare a `U`-encoded version of the `bulb` font family and then to specify that a LATEX 2ε request for a `U`-encoded version of `bulb` with a (`m`)edium font series (as opposed to, e.g., bold) and a (`n`)ormal font shape (as opposed to, e.g., italic) should translate into a TEX request for `lightbulb10.tfm` mechanically scaled to the current font size.

```
\DeclareFontFamily{U}{bulb}{}
\DeclareFontShape{U}{bulb}{m}{n}{<-> lightbulb10}{}
```

Figure 6: LATEX 2ε font-description file (`ubulb.fd`)

The final step is to write a LATEX 2ε style file that defines a name for each symbol in the font. Because we have only one symbol our style file, `lightbulb.sty` (Figure 7), is rather trivial. Note that instead of typesetting "`A`" we could have had `\lightbulb` typeset "`\char65`", "`\char"41`", or "`\char'101`" (respectively, decimal, hexadecimal, and octal character offsets into the font). For a simple, one-character symbol font such as LightBulb10 it would be reasonable to merge `ubulb.fd` into `lightbulb.sty` instead of maintaining two separate files. In either case, a document need only include "`\usepackage{lightbulb}`" to make the `\lightbulb` symbol available.

METAFONT normally produces bitmapped fonts. However, it is also possible, with the help of some external tools, to produce PostScript Type 1 fonts. These have the advantages of rendering better in Adobe® Acrobat® (at least in versions prior to 6.0) and of being more memory-efficient when handled by a PostScript interpreter. See

```
\newcommand{\lightbulb}{{\usefont{U}{bulb}{m}{n}A}}
```

Figure 7: LaTeX 2ε style file (`lightbulb.sty`)

`http://www.tex.ac.uk/cgi-bin/texfaq2html?label=textrace` for pointers to tools that can produce Type 1 fonts from METAFONT.

8.4 Math-mode spacing

Terms such as "binary operators", "relations", and "punctuation" in Section 3 primarily regard the surrounding spacing. (See the Short Math Guide for LaTeX [Dow00] for a nice exposition on the subject.) To use a symbol for a different purpose, you can use the TeX commands `\mathord`, `\mathop`, `\mathbin`, `\mathrel`, `\mathopen`, `\mathclose`, and `\mathpunct`. For example, if you want to use `\downarrow` as a variable (an "ordinary" symbol) instead of a delimiter, you can write "`$3 x + \mathord{\downarrow}$`" to get the properly spaced "$3x+\downarrow$" rather than the awkward-looking "$3x+ \downarrow$". Similarly, to create a dotted-union symbol ("$\dot\cup$") that spaces like the ordinary set-union symbol (`\cup`) it must be defined with `\mathbin`, just as `\cup` is. Contrast "`$A \dot{\cup} B$`" ("$A\dot\cup B$") with "`$A \mathbin{\dot{\cup}} B$`" ("$A \mathbin{\dot\cup} B$"). See The TeXbook [Knu86a] for the definitive description of math-mode spacing.

The purpose of the "log-like symbols" in Table 128 and Table 129 is to provide the correct amount of spacing around and within multiletter function names. Table 325 contrasts the output of the log-like symbols with various, naïve alternatives. In addition to spacing, the log-like symbols also handle subscripts properly. For example, "`\max_{p \in P}`" produces "$\max_{p\in P}$" in text, but "$\max\limits_{p\in P}$" as part of a displayed formula.

Table 325: Spacing Around/Within Log-like Symbols

LaTeX expression	Output	
`$r \sin \theta$`	$r \sin \theta$	(best)
`$r sin \theta$`	$rsin\theta$	
`$r \mbox{sin} \theta$`	$r\mathrm{sin}\theta$	
`$r \mathrm{sin} \theta$`	$r\mathrm{sin}\theta$	

The amsmath package makes it straightforward to define new log-like symbols:

```
\DeclareMathOperator{\atan}{atan}
\DeclareMathOperator*{\lcm}{lcm}
```

The difference between `\DeclareMathOperator` and `\DeclareMathOperator*` involves the handling of subscripts. With `\DeclareMathOperator*`, subscripts are written beneath log-like symbols in display style and to the right in text style. This is useful for limit operators (e.g., `\lim`) and functions that tend to map over a set (e.g., `\min`). In contrast, `\DeclareMathOperator` tells TeX that subscripts should always be displayed to the right of the operator, as is common for functions that take a single parameter (e.g., `\log` and `\cos`). Table 326 contrasts symbols declared with `\DeclareMathOperator` and `\DeclareMathOperator*` in both text style (`$...$`) and display style (`\[...\]`).[12]

It is common to use a thin space (`\,`) between the words of a multiword operators, as in "`\DeclareMathOperator*{\argmax}{arg\,max}`". `\liminf`, `\limsup`, and all of the log-like symbols shown in Table 129 utilize this spacing convention.

8.5 Bold mathematical symbols

LaTeX does not normally use bold symbols when typesetting mathematics. However, bold symbols are occasionally needed, for example when naming vectors. Any of the approaches described at `http://www.tex.ac.uk/cgi-bin/`

[12]Note that `\displaystyle` can be used to force display style within `$...$` and `\textstyle` can be used to force text style within `\[...\]`.

TABLE 326: Defining new log-like symbols

Declaration function	`$\newlogsym_{p \in P}$`	`\[ \newlogsym_{p \in P} \]`
`\DeclareMathOperator`	$\mathrm{newlogsym}_{p \in P}$	$\mathrm{newlogsym}_{p \in P}$
`\DeclareMathOperator*`	$\mathrm{newlogsym}_{p \in P}$	$\mathrm{newlogsym}\limits_{p \in P}$

`texfaq2html?label=boldgreek` can be used to produce bold mathematical symbols. Table 327 contrasts the output produced by these various techniques. As the table illustrates, these techniques exhibit variation in their formatting of Latin letters (upright vs. italic), formatting of Greek letters (bold vs. normal), formatting of operators and relations (bold vs. normal), and spacing.

TABLE 327: Producing bold mathematical symbols

Package	Code	Output	
none	`$\alpha + b = \Gamma \div D$`	$\alpha + b = \Gamma \div D$	(no bold)
none	`$\mathbf{\alpha + b = \Gamma \div D}$`	$\alpha + \mathbf{b} = \mathbf{\Gamma \div D}$	
none	`\boldmath$\alpha + b = \Gamma \div D$`	$\boldsymbol{\alpha + b = \Gamma \div D}$	
amsbsy	`$\pmb{\alpha + b = \Gamma \div D}$`	$\boldsymbol{\alpha + b = \Gamma \div D}$	(faked bold)
amsbsy	`$\boldsymbol{\alpha + b = \Gamma \div D}$`	$\boldsymbol{\alpha + b = \Gamma \div D}$	
bm	`$\bm{\alpha + b = \Gamma \div D}$`	$\boldsymbol{\alpha + b = \Gamma \div D}$	
fixmath	`$\mathbold{\alpha + b = \Gamma \div D}$`	$\boldsymbol{\alpha + b = \Gamma \div D}$	

8.6 ASCII and Latin 1 quick reference

Table 328 on the next page amalgamates data from various other tables in this document into a convenient reference for LaTeX 2ε typesetting of ASCII characters, i.e., the characters available on a typical U.S. computer keyboard. The first two columns list the character's ASCII code in decimal and hexadecimal. The third column shows what the character looks like. The fourth column lists the LaTeX 2ε command to typeset the character as a text character. And the fourth column lists the LaTeX 2ε command to typeset the character within a `\texttt{...}` command (or, more generally, when `\ttfamily` is in effect).

The following are some additional notes about the contents of Table 328:

- "`"` is not available in the OT1 font encoding.
- Table 328 shows a close quote for character 39 for consistency with the open quote shown for character 96. A straight quote can be typeset using `\textquotesingle` (cf. Table 40).
- The characters "`<`", "`>`", and "`|`" do work as expected in math mode, although they produce, respectively, "¡", "¿", and "—" in text mode when using the OT1 font encoding.[13] The following are some alternatives for typesetting "<", ">", and "|":
  - Specify a document font encoding other than OT1 (as described on page 9).
  - Use the appropriate symbol commands from Table 2 on page 10, viz. `\textless`, `\textgreater`, and `\textbar`.
  - Enter the symbols in math mode instead of text mode, i.e., `$<$`, `$>$`, and `$|$`.

  Note that for typesetting metavariables many people prefer `\textlangle` and `\textrangle` to `\textless` and `\textgreater`; i.e., "⟨*filename*⟩" instead of "<*filename*>".

[13] Donald Knuth didn't think such symbols were important outside of mathematics so he omitted them from his text fonts.

TABLE 328: LaTeX 2ε ASCII Table

Dec	Hex	Char	Body text	\texttt
33	21	!	!	!
34	22	"	\textquotedbl	"
35	23	#	\#	\#
36	24	$	\$	\$
37	25	%	\%	\%
38	26	&	\&	\&
39	27	’	’	’
40	28	(	(	(
41	29	)	)	)
42	2A	*	*	*
43	2B	+	+	+
44	2C	,	,	,
45	2D	-	-	-
46	2E	.	.	.
47	2F	/	/	/
48	30	0	0	0
49	31	1	1	1
50	32	2	2	2
⋮	⋮	⋮	⋮	⋮
57	39	9	9	9
58	3A	:	:	:
59	3B	;	;	;
60	3C	<	\textless	<
61	3D	=	=	=
62	3E	>	\textgreater	>
63	3F	?	?	?
64	40	@	@	@
65	41	A	A	A
66	42	B	B	B
67	43	C	C	C
⋮	⋮	⋮	⋮	⋮
90	5A	Z	Z	Z
91	5B	[	[	[
92	5C	\	\textbackslash	\char‘\\
93	5D	]	]	]
94	5E	^	\^{}	\^{}
95	5F	_	_	\char‘_
96	60	‘	‘	‘
97	61	a	a	a
98	62	b	b	b
99	63	c	c	c
⋮	⋮	⋮	⋮	⋮
122	7A	z	z	z
123	7B	{	\{	\char‘\{
124	7C	|	\textbar	|
125	7D	}	\}	\char‘\}
126	7E	~	\~{}	\~{}

- Although “/” does not require any special treatment, LaTeX additionally defines a `\slash` command which outputs the same glyph but permits a line break afterwards. That is, “`increase/decrease`” is always typeset as a single entity while “`increase\slash{}decrease`” may be typeset with “increase/” on one line and “decrease” on the next.

- `\textasciicircum` can be used instead of `\^{}`, and `\textasciitilde` can be used instead of `\~{}`. Note that `\textasciitilde` and `\~{}` produce raised, diacritic tildes. “Text” (i.e., vertically centered) tildes can be generated with either the math-mode `\sim` command (shown in Table 67 on page 34), which produces a somewhat wide “∼”, or the textcomp package’s `\texttildelow` (shown in Table 40 on page 22), which produces a vertically centered “~” in most fonts but a baseline-oriented “˜” in Computer Modern, txfonts, pxfonts, and various other fonts originating from the TeX world. If your goal is to typeset tildes in URLs or Unix filenames, your best bet is to use the url package, which has a number of nice features such as proper line-breaking of such names.

- The various `\char` commands within `\texttt` are necessary only in the OT1 font encoding. In other encodings (e.g., T1), commands such as `\{`, `\}`, `\_`, and `\textbackslash` all work properly.

- The code page 437 (IBM PC) version of ASCII characters 1 to 31 can be typeset using the ascii package. See Table 227 on page 81.

- To replace “‘” and “’” with the more computer-like (and more visibly distinct) “`” and “'” within a `verbatim` environment, use the upquote package. Outside of `verbatim`, you can use `\char18` and `\char13` to get the modified quote characters. (The former is actually a grave accent.)

Similar to Table 328, Table 329 on the next page is an amalgamation of data from other tables in this document. While Table 328 shows how to typeset the 7-bit ASCII character set, Table 329 shows the Latin 1 (Western European) character set, also known as ISO-8859-1.

The following are some additional notes about the contents of Table 329:

- A "(tc)" after a symbol name means that the textcomp package must be loaded to access that symbol. A "(T1)" means that the symbol requires the T1 font encoding. The fontenc package can change the font encoding document-wide.
- Many of the `\text...` accents can also be produced using the accent commands shown in Table 17 on page 16 plus an empty argument. For instance, `\={}` is essentially the same as `\textasciimacron`.
- The commands in the "LaTeX 2ε" columns work both in body text and within a `\texttt{...}` command (or, more generally, when `\ttfamily` is in effect).
- The "£" and "$" glyphs occupy the same slot (36) of the OT1 font encoding, with "£" appearing in italic fonts and "$" appearing in roman fonts. A problem with LaTeX's default handling of this double-mapping is that "`{\sffamily\slshape\pounds}`" produces "*$*", not "*£*". Other font encodings use separate slots for the two characters and are therefore robust to the problem of "£"/"$" conflicts. Authors who use `\pounds` should select a font encoding other than OT1 (as explained on page 9) or use the textcomp package, which redefines `\pounds` to use the TS1 font encoding.
- Character 173, `\-`, is shown as "-" but is actually a discretionary hyphen; it appears only at the end of a line.

Microsoft® Windows® normally uses a superset of Latin 1 called "Code Page 1252" or "CP1252" for short. CP1252 introduces symbols in the Latin 1 "invalid" range (characters 128–159). Table 330 presents the characters with which CP1252 augments the standard Latin 1 table.

The following are some additional notes about the contents of Table 330:

- As in Table 329, a "(tc)" after a symbol name means that the textcomp package must be loaded to access that symbol. A "(T1)" means that the symbol requires the T1 font encoding. The fontenc package can change the font encoding document-wide.
- Not all characters in the 128–159 range are defined.
- Look up "euro signs" in the index for alternatives to `\texteuro`.

While too large to incorporate into this document, a listing of ISO 8879:1986 SGML/XML character entities and their LaTeX equivalents is available from `http://www.bitjungle.com/~isoent/`. Some of the characters presented there make use of isoent, a LaTeX 2ε package (available from the same URL) that fakes some of the missing ISO glyphs using the LaTeX `picture` environment.[14]

8.7 Unicode characters

Unicode is a "universal character set"—a standard for encoding (i.e., assigning unique numbers to) the symbols appearing in many of the world's languages. While ASCII can represent 128 symbols and Latin 1 can represent 256 symbols, Unicode can represent an astonishing 1,114,112 symbols.

Because TeX and LaTeX predate the Unicode standard and Unicode fonts by almost a decade, support for Unicode has had to be added to the base TeX and LaTeX systems. Note first that LaTeX distinguishes between *input* encoding—the characters used in the `.tex` file—and *output* encoding—the characters that appear in the generated `.dvi`, `.pdf`, etc. file.

[14] isoent is not featured in this document, because it is not available from CTAN and because the faked symbols are not "true" characters; they exist in only one size, regardless of the body text's font size.

TABLE 329: LaTeX 2_ε Latin 1 Table

Dec	Hex	Char	LaTeX 2_ε	
161	A1	¡	!‘	
162	A2	¢	\textcent	(tc)
163	A3	£	\pounds	
164	A4	¤	\textcurrency	(tc)
165	A5	¥	\textyen	(tc)
166	A6	¦	\textbrokenbar	(tc)
167	A7	§	\S	
168	A8	¨	\textasciidieresis	(tc)
169	A9	©	\textcopyright	
170	AA	ª	\textordfeminine	
171	AB	«	\guillemotleft	(T1)
172	AC	¬	\textlnot	(tc)
173	AD	-	\-	
174	AE	®	\textregistered	
175	AF	¯	\textasciimacron	(tc)
176	B0	°	\textdegree	(tc)
177	B1	±	\textpm	(tc)
178	B2	²	\texttwosuperior	(tc)
179	B3	³	\textthreesuperior	(tc)
180	B4	´	\textasciiacute	(tc)
181	B5	µ	\textmu	(tc)
182	B6	¶	\P	
183	B7	·	\textperiodcentered	
184	B8	¸	\c{}	
185	B9	¹	\textonesuperior	(tc)
186	BA	º	\textordmasculine	
187	BB	»	\guillemotright	(T1)
188	BC	¼	\textonequarter	(tc)
189	BD	½	\textonehalf	(tc)
190	BE	¾	\textthreequarters	(tc)
191	BF	¿	?‘	
192	C0	À	\‘{A}	
193	C1	Á	\’{A}	
194	C2	Â	\^{A}	
195	C3	Ã	\~{A}	
196	C4	Ä	\"{A}	
197	C5	Å	\AA	
198	C6	Æ	\AE	
199	C7	Ç	\c{C}	
200	C8	È	\‘{E}	
201	C9	É	\’{E}	
202	CA	Ê	\^{E}	
203	CB	Ë	\"{E}	
204	CC	Ì	\‘{I}	
205	CD	Í	\’{I}	
206	CE	Î	\^{I}	
207	CF	Ï	\"{I}	
208	D0	Đ	\DH	(T1)

Dec	Hex	Char	LaTeX 2_ε	
209	D1	Ñ	\~{N}	
210	D2	Ò	\‘{O}	
211	D3	Ó	\’{O}	
212	D4	Ô	\^{O}	
213	D5	Õ	\~{O}	
214	D6	Ö	\"{O}	
215	D7	×	\texttimes	(tc)
216	D8	Ø	\O	
217	D9	Ù	\‘{U}	
218	DA	Ú	\’{U}	
219	DB	Û	\^{U}	
220	DC	Ü	\"{U}	
221	DD	Ý	\’{Y}	
222	DE	Þ	\TH	(T1)
223	DF	ß	\ss	
224	E0	à	\‘{a}	
225	E1	á	\’{a}	
226	E2	â	\^{a}	
227	E3	ã	\~{a}	
228	E4	ä	\"{a}	
229	E5	å	\aa	
230	E6	æ	\ae	
231	E7	ç	\c{c}	
232	E8	è	\‘{e}	
233	E9	é	\’{e}	
234	EA	ê	\^{e}	
235	EB	ë	\"{e}	
236	EC	ì	\‘{ı}	
237	ED	í	\’{ı}	
238	EE	î	\^{ı}	
239	EF	ï	\"{ı}	
240	F0	ð	\dh	(T1)
241	F1	ñ	\~{n}	
242	F2	ò	\‘{o}	
243	F3	ó	\’{o}	
244	F4	ô	\^{o}	
245	F5	õ	\~{o}	
246	F6	ö	\"{o}	
247	F7	÷	\textdiv	(tc)
248	F8	ø	\o	
249	F9	ù	\‘{u}	
250	FA	ú	\’{u}	
251	FB	û	\^{u}	
252	FC	ü	\"{u}	
253	FD	ý	\’{y}	
254	FE	þ	\th	(T1)
255	FF	ÿ	\"{y}	

TABLE 330: LaTeX 2ε Code Page 1252 Table

Dec	Hex	Char	LaTeX 2ε	
128	80	€	\texteuro	(tc)
130	82	‚	\quotesinglbase	(T1)
131	83	*f*	\textit{f}	
132	84	„	\quotedblbase	(T1)
133	85	…	\dots	
134	86	†	\dag	
135	87	‡	\ddag	
136	88	ˆ	\textasciicircum	
137	89	‰	\textperthousand	(tc)
138	8A	Š	\v{S}	
139	8B	‹	\guilsinglleft	(T1)
140	8C	Œ	\OE	
142	8E	Ž	\v{Z}	

Dec	Hex	Char	LaTeX 2ε	
145	91	‘	‘	
146	92	’	’	
147	93	“	‘‘	
148	94	”	’’	
149	95	•	\textbullet	
150	96	–	--	
151	97	—	---	
152	98	˜	\textasciitilde	
153	99	™	\texttrademark	
154	9A	š	\v{s}	
155	9B	›	\guilsinglright	(T1)
156	9C	œ	\oe	
158	9E	ž	\v{z}	
159	9F	Ÿ	\"{Y}	

Inputting Unicode characters

To include Unicode characters in a `.tex` file, load the ucs package and load the inputenc package with the utf8x ("UTF-8 extended") option.[15] These packages enable LaTeX to translate UTF-8 sequences to LaTeX commands, which are subsequently processed as normal. For example, the UTF-8 text "Copyright © 2009"—"©" is not an ASCII character and therefore cannot be input directly without packages such as ucs/inputenc—is converted internally by inputenc to "Copyright \textcopyright{} 2009" and therefore typeset as "Copyright © 2009".

The ucs/inputenc combination supports only a tiny subset of Unicode's million-plus symbols. Additional symbols can be added manually using the `\DeclareUnicodeCharacter` command. `\DeclareUnicodeCharacter` takes two arguments: a Unicode number and a LaTeX command to execute when the corresponding Unicode character is encountered in the input. For example, the Unicode character "degree celsius" ("℃") appears at character position U+2103.[16] However, "℃" is not one of the characters that ucs and inputenc recognize. The following document shows how to use `\DeclareUnicodeCharacter` to tell LaTeX that the "℃" character should be treated as a synonym for `\textcelsius`:

```
\documentclass{article}
\usepackage{ucs}
\usepackage[utf8x]{inputenc}
\usepackage{textcomp}

\DeclareUnicodeCharacter{"2103}{\textcelsius}   % Enable direct input of U+2103.

\begin{document}
It was a balmy 21℃.
\end{document}
```

which produces

> It was a balmy 21℃.

See the ucs documentation for more information and for descriptions of the various options that control ucs's behavior.

[15] UTF-8 is the 8-bit Unicode Transformation Format, a popular mechanism for representing Unicode symbol numbers as sequences of one to four bytes.

[16] The Unicode convention is to express character positions as "U+⟨*hexadecimal number*⟩".

Outputting Unicode characters

Orthogonal to the ability to include Unicode characters in a LaTeX input file is the ability to include a given Unicode character in the corresponding output file. By far the easiest approach is to use XeLaTeX instead of pdfLaTeX or ordinary LaTeX. XeLaTeX handles Unicode input and output natively and can utilize system fonts directly without having to expose them via `.tfm`, `.fd`, and other such files. To output a Unicode character, a XeLaTeX document can either include that character directly as UTF-8 text or use TeX's `\char` primitive, which XeLaTeX extends to accept numbers larger than 255.

Suppose we want to output the symbols for versicle ("℣") and response ("℟") in a document. The Unicode charts list "versicle" at position U+2123 and "response" at position U+211F. We therefore need to install a font that contains those characters at their proper positions. One such font that is freely available from CTAN is Junicode Regular (`Junicode-Regular.ttf`) from the junicode package. The fontspec package makes it easy for a XeLaTeX document to utilize a system font. The following example defines a `\textjuni` command that uses fontspec to typeset its argument in Junicode Regular:

```
\documentclass{article}
\usepackage{fontspec}

\newcommand{\textjuni}[1]{{\fontspec{Junicode-Regular}#1}}

\begin{document}
We use ``\textjuni{\char"2123}'' for a versicle
and ``\textjuni{\char"211F}'' for a response.
\end{document}
```

which produces

> We use "℣" for a versicle and "℟" for a response.

(Typesetting the entire document in Junicode Regular would be even easier. See the fontspec documentation for more information regarding font selection.) Note how the preceding example uses `\char` to specify a Unicode character by number. The double quotes before the number indicate that the number is represented in hexadecimal instead of decimal.

8.8 About this document

History David Carlisle wrote the first version of this document in October, 1994. It originally contained all of the native LaTeX symbols (Table 44, Table 57, Table 67, Table 102, Table 128, Table 131, Table 152, Table 153, Table 164, Table 169, Table 201, and a few tables that have since been reorganized) and was designed to be nearly identical to the tables in Chapter 3 of Leslie Lamport's book [Lam86]. Even the table captions and the order of the symbols within each table matched! The $\mathcal{AMS}$ symbols (Table 45, Table 68, Table 69, Table 105, Table 106, Table 132, Table 137, Table 148, and Table 202) and an initial Math Alphabets table (Table 213) were added thereafter. Later, Alexander Holt provided the stmaryrd tables (Table 46, Table 59, Table 70, Table 108, Table 125, and Table 149).

In January, 2001, Scott Pakin took responsibility for maintaining the symbol list and has since implemented a complete overhaul of the document. The result, now called, "The Comprehensive LaTeX Symbol List", includes the following new features:

- the addition of a handful of new math alphabets, dozens of new font tables, and thousands of new symbols
- the categorization of the symbol tables into body-text symbols, mathematical symbols, science and technology symbols, dingbats, ancient languages, and other symbols, to provide a more user-friendly document structure
- an index, table of contents, hyperlinks, and a frequently-requested symbol list, to help users quickly locate symbols

- symbol tables rewritten to list the symbols in alphabetical order
- appendices providing additional information relevant to using symbols in LaTeX
- tables showing how to typeset all of the characters in the ASCII and Latin 1 font encodings

Furthermore, the internal structure of the document has been completely altered from David Carlisle's original version. Most of the changes are geared towards making the document easier to extend, modify, and reformat.

Build characteristics Table 331 lists some of this document's build characteristics. Most important is the list of packages that LaTeX couldn't find, but that `symbols.tex` otherwise would have been able to take advantage of. Complete, prebuilt versions of this document are available from CTAN (`http://www.ctan.org/` or one of its many mirror sites) in the directory `tex-archive/info/symbols/comprehensive`. Table 332 shows the package date (specified in the `.sty` file with `\ProvidesPackage`) for each package that was used to build this document and that specifies a package date. Packages are not listed in any particular order in either Table 331 or Table 332.

Table 331: Document Characteristics

Characteristic	Value
Source file:	`symbols.tex`
Build date:	November 9, 2009
Symbols documented:	5913
Packages included:	textcomp latexsym amssymb stmaryrd euscript wasysym pifont manfnt bbding undertilde ifsym tipa tipx extraipa wsuipa phonetic ulsy ar metre txfonts mathabx fclfont skak ascii dingbat skull eurosym esvect yfonts yhmath esint mathdots trsym universa upgreek overrightarrow chemarr chemarrow nath trfsigns mathtools phaistos arcs vietnam t4phonet holtpolt semtrans dictsym extarrows protosem harmony hieroglf cclicenses mathdesign arev MnSymbol cmll extpfeil keystroke fge turnstile simpsons epsdice feyn universal staves igo colonequals shuffle fourier dozenal pmboxdraw pigpen clock teubner linearA linearb cypriot sarabian china2e harpoon steinmetz milstd recycle DotArrow ushort hhcount ogonek combelow accents nicefrac bm mathrsfs chancery calligra bbold mbboard dsfont bbm
Packages omitted:	*none*

Table 332: Package versions used in the preparation of this document

Name	Date
textcomp	2005/09/27
latexsym	1998/08/17
amssymb	2002/01/22
stmaryrd	1994/03/03
euscript	2001/10/01
wasysym	2003/10/30
pifont	2005/04/12
manfnt	1999/07/01

(continued on next page)

(continued from previous page)

Name	Date
bbding	1999/04/15
undertilde	2000/08/08
ifsym	2000/04/18
tipa	2002/08/08
tipx	2003/01/01
wsuipa	1994/07/16
metre	2001/12/05
txfonts	2008/01/22
mathabx	2003/07/29
skak	2008/10/09
ascii	2006/05/30
dingbat	2001/04/27
skull	2002/01/23
eurosym	1998/08/06
yfonts	2003/01/08
mathdots	2006/03/16
trsym	2000/06/25
universa	98/08/01
upgreek	2003/02/12
chemarr	2006/02/20
mathtools	2008/08/01
phaistos	2004/04/23
arcs	2004/05/09
t4phonet	2004/06/01
semtrans	1998/02/10
dictsym	2004/07/26
extarrows	2008/05/15
protosem	2005/03/18
harmony	2007/05/03
hieroglf	2000/09/23
cclicenses	2005/05/20
arev	2005/06/14
MnSymbol	2007/01/21
extpfeil	2006/07/27
keystroke	2003/08/15
fge	2007/06/03
turnstile	2007/06/23
epsdice	2007/02/15
feyn	2008/02/29
universal	97/12/24
colonequals	2006/08/01
shuffle	2008/10/27
pmboxdraw	2006/05/03
pigpen	2008/12/07
clock	2001/04/10
teubner	2008/02/10
linearA	2006/03/13
linearb	2005/06/22

(continued on next page)

(continued from previous page)

Name	Date
cypriot	1999/06/20
sarabian	2005/11/12
china2e	1997/06/01
harpoon	1994/11/02
steinmetz	2009/06/14
DotArrow	2007/02/12
ushort	2001/06/13
hhcount	1995/03/31
ogonek	95/07/17
combelow	2009/08/23
accents	2006/05/12
nicefrac	1998/08/04
bm	2004/02/26
calligra	1996/07/18

8.9 Copyright and license

The Comprehensive LaTeX Symbol List
Copyright © 2009, Scott Pakin

This work may be distributed and/or modified under the conditions of the LaTeX Project Public License, either version 1.3c of this license or (at your option) any later version. The latest version of this license is in

`http://www.latex-project.org/lppl.txt`

and version 1.3c or later is part of all distributions of LaTeX version 2006/05/20 or later.

This work has the LPPL maintenance status "maintained".

The current maintainer of this work is Scott Pakin.

References

[AMS99] American Mathematical Society. *User's Guide for the amsmath Package (Version 2.0)*, December 13, 1999. Available from `ftp://ftp.ams.org/pub/tex/doc/amsmath/amsldoc.pdf`.

[Ber01] Karl Berry. Fontname: Filenames for TEX fonts, June 2001. Available from `http://www.ctan.org/tex-archive/info/fontname`.

[Che97] Raymond Chen. A METAFONT of 'Simpsons' characters. *Baskerville*, 4(4):19, September 1997. ISSN 1354-5930. Available from `http://tug.ctan.org/usergrps/uktug/baskervi/4_4/bask4_4.ps`.

[Dow00] Michael Downes. Short math guide for LATEX, July 19, 2000. Version 1.07. Available from `http://www.ams.org/tex/short-math-guide.html`.

[Gib97] Jeremy Gibbons. Hey—it works! *TUGboat*, 18(2):75–78, June 1997. Available from `http://www.tug.org/TUGboat/Articles/tb18-2/tb55works.pdf`.

[Knu86a] Donald E. Knuth. *The TEXbook*, volume A of *Computers and Typesetting*. Addison-Wesley, Reading, MA, USA, 1986.

[Knu86b] Donald E. Knuth. *The METAFONTbook*, volume C of *Computers and Typesetting*. Addison-Wesley, Reading, MA, USA, 1986.

[Lam86] Leslie Lamport. *LATEX: A document preparation system*. Addison-Wesley, Reading, MA, USA, 1986.

[LAT98] LATEX3 Project Team. A new math accent. *LATEX News*. Issue 9, June 1998. Available from `http://www.ctan.org/tex-archive/macros/latex/doc/ltnews09.pdf` (also included in many TEX distributions).

[LAT00] LATEX3 Project Team. LATEX 2_ε font selection, January 30, 2000. Available from `http://www.ctan.org/tex-archive/macros/latex/doc/fntguide.ps` (also included in many TEX distributions).

Index

If you're having trouble locating a symbol, try looking under "T" for "`\text`...". Many text-mode commands begin with that prefix. Also, accents are shown over/under a gray box (e.g., "◌́" for "`\'`").

Some symbol entries appear to be listed repeatedly. This happens when multiple packages define identical (or nearly identical) glyphs with the same symbol name.[17]

Symbols

`\"` (◌̈) 16
`\#` (#) 10, 125
`\$` ($) 10, 125
`\%` (%) 10, 125
`\&` (&) 10, 125
`\'` (◌́) 16
`(` (() 61
`(` (⎛) 62
`)` ()) 61
`)` (⎞) 62
`*` (*) 26
`\,` 123
`\-` (-) 126, 127
`\.` (◌̇) 16
`/` (/) 61
`/` (⧸) 62
`\:` (:) 72
`\;` (⁚) 72
`<` (⎜) 62
`\?` (⁝) 72
`[` ([) 61
`[` (⎡) 63
`\\` 115
`]` (]) 61
`]` (⎤) 63
`\^` (◌̂) 16
`\^{}` (^) 10, 125
`\|` (‖) 61
`\|` (‖) 61, 63
`\|` (◌̇) 16
`\=` (◌̄) 16
`\={}` (¯) 126
`|` (⎢) 63
`|` (|) 34, 61, 63, 64
`\_` (_) 10, 125
`\{` ({) 10, 61, 125
`\}` (}) 10, 61, 125
`\‘` (◌̀) 16
`\~` (◌̃) 16
`\~{}` (~) 10, 125

A

`a` (esvect package option) 68
`\a` (×) 105
`\AA` (Å) 11
`\aa` (å) 11
`\AAaleph` (ᵸ) 91
`\AAayin` (ᵹ) 91
`\AAbeth` (ᵼ) 91
`\AAcht` (𝅘𝅥𝅗𝅥) 99
`\AAdaleth` (ᵾ) 91
`\AAhe` (ᵺ) 91
`\AAhelmet` (ᵻ) 91
`\AAheth` (ᵸ) 91
`\AAkaph` (ᵿ) 91
`\AAlamed` (ᶀ) 91
`\Aaleph` (ᵷ) 91
`\AApe` (ᶁ) 91
`\AAqoph` (ᶆ) 91
`\AAresh` (ᶉ) 91
`\AAsade` (ᶊ) 91
`\Aayin` (ᵸ) 91
`\AAyod` (ᶌ) 91
`\Abeth` (ᶀ) 91
absolute value . . *see* `\lvert` *and* `\rvert`
abzüglich . . *see* `\textdiscount`
`\AC` (∼) 78
`\acarc` 18
`\acbar` 18
accents . . . 16–20, 65–68, 80, 99, 118–119
  acute (◌́) 16–18, 20, 65
  any character as 118
  arc (◌͡) 16–19, 66–68
  breve (◌̆) 16–18, 20, 65
  caron (◌̌) 16, 20, 65, 67
  cedilla (◌̧) 16
  circumflex (◌̂) 16–17, 65–67
  comma-below (◌̦) 19
  diæresis (◌̈) 16, 18, 20, 65, 77
  dot (◌̇ or ◌̣) 16–17, 65
  double acute (◌̋) 16, 20
  extensible 66–68, 70, 118–119
  grave (◌̀) 16–18, 20, 65
  háček . . . *see* accents, caron
  hook (◌̉) 16
  Hungarian umlaut . . . . *see* accents, double acute
  kroužek . . *see* accents, ring
  macron (◌̄) 16, 18, 20, 65–67
  multiple per character 16–17, 118
  ogonek (◌̨) 16–19
  ring (◌̊) . . 16–17, 20, 65, 66
  Romanian comma-belo accent *see* accents, comma-below
  trema . *see* accents, diæresis
  umlaut *see* accents, diæresis
`accents` (package) 65, 118, 130, 132
`\accentset` 118
`\Acht` (𝅘𝅥𝅗𝅥) 99
`\AchtBL` (𝅘𝅥𝅗𝅥) 99
`\AchtBR` (𝅘𝅥𝅗𝅥) 99
`\ACK` (♠) 81
`\acontraction` 119
`\AcPa` (ᵹ) 99
`\actuarial` (▣) 118
actuarial symbols 118
`\acute` (◌́) 65
acute (◌́) . . . . . *see* accents
`\acutus` (◌́) 18
`\Adaleth` (ᵾ) 91
adeles (𝔸) . . *see* alphabets, math
adjoint (†) . . . . . *see* `\dag`
Adobe Acrobat 122
`\adots` (⋰) 71, 117
advancing . . *see* `\textadvancing`
`\AE` (Æ) 11
`\ae` (æ) 11
`\aeolicbii` (∞) 106
`\aeolicbiii` (∞∞) 106
`\aeolicbiv` (∞∞) 106
`\agemO` (ʊ) 73
`\Agimel` (ᶣ) 91
`\Ahe` (ᶣ) 91
`\Ahelmet` (ᶤ) 91
`\Aheth` (ᶣ) 91
`\ain` (ʿ) 20
`\Akaph` (ᶣ) 91
`\Alad` (}) 65
`\alad` (}) 65
`\Alamed` (ᶅ) 91
`\Alas` ({) 65
`\alas` ({) 65
`\aldine` (❦) 88
`\aldineleft` (❦) 88
`\aldineright` (❦) 88
`\aldinesmall` (❧) 88

[17] This occurs frequently between `amssymb` and `mathabx`, for example.

\aleph (ℵ) 58, 73
\aleph (ℵ) 58
\Alif (ʾ) 15
\alpha (α) 57
alphabets
  African 11
  Cypriot 96
  Cyrillic 113
  Greek 57, 58, 76, 97
  Hebrew 58, 76
  hieroglyphic 92
  Linear A 92
  Linear B 95
  math 76
  phonetic 12–15
  proto-Semitic 91
  South Arabian 97
  Vietnamese 11
\alphaup (α) 57
alpine symbols 102
\Alt (Alt) 80
alternative denial . . *see* \uparrow *and* |
\AltGr (AltGr) 80
\amalg (⨿) 24
\amalg (⨿) 26
\Amem (≏) 91
ampersand . . . . . *see* \&
$\mathcal{AMS}$ 9, 11, 24, 29, 34, 41, 43, 46, 48, 56–61, 65, 67, 68, 71, 73, 77, 110, 129
amsbsy (package) 124
amsfonts (package) 24, 34, 41, 47, 73, 76
amsmath (package) 9, 56, 65, 114, 123
amssymb (package) 9, 24, 34, 41, 47, 65, 73, 76, 97, 130, 134
amstext (package) 115, 117
\Anaclasis (÷) 105
\anaclasis (÷) 105
\anceps (×) 106
\ancepsdbrevis (⧺) 106
\anchor (⚓) 90
ancient-language symbols . 91–97
and . . . . . *see* \wedge
AND gates 81
\ANDd ( ) 81
\ANDl ( ) 81
\ANDr ( ) 81
\ANDu ( ) 81
\angle (∠) 73
\angle (∠) 73
\angle (∠) 74
angle notation 79
angles 73–75
\Anglesign (⦟) 74
Ångström unit
  math mode . *see* \mathring
  text mode . . . . . *see* \AA
\Angud (⦥) 65
\angud (⦦) 65
angular minutes . . . . *see* \prime
angular seconds . . . . *see* \second
\Angus (⦤) 65
\angus (⦣) 65
animals 91, 92, 96
\Ankh (☥) 101
annuity symbols 118
\Antidiple (<) 105
\antidiple (<) 105
\Antidiple* (⪡) 105
\antidiple* (⪡) 105
\antilabe (::) 72
\Antisigma (⊃) 105
\antisigma (⊃) 105
\Anun (⅂) 91
\Ape (⊾) 91
APL
  modifiers 80
  symbols 80
\APLbox (□) 80
\APLcirc (∘) 80
\APLcomment (⍝) 80
\APLdown (▽) 80
\APLdownarrowbox (⍗) 80
\APLinput (⍞) 80
\APLinv (⌹) 80
\APLleftarrowbox (⍇) 80
\APLlog (⍟) 80
\APLminus (¯) 80
\APLnot (~) 80
\APLrightarrowbox (⍈) 80
\APLstar (⋆) 80
\APLup (△) 80
\APLuparrowbox (⍐) 80
\APLvert (|) 80
\apprge (≳) 43
\apprle (≲) 43
\approx (≈) 34
\approx (≈) 36
\approxcolon (≈:) 41
\approxcoloncolon (≈::) 41
\approxeq (≊) 34
\approxeq (≊) 36
\Aqoph (ᕴ) 91
\Aquarius (♒) 79
\aquarius (≈≈) 79
\AR (Ⓡ) 78
ar (package) 78, 130
arc ( ) . . . . . *see* accents
\arccos (arccos) 56
arcminutes . . . . . *see* \prime
arcs (package) 19, 130, 131
arcseconds . . . . . *see* \second
\arcsin (arcsin) 56
\arctan (arctan) 56
\Aresh (ᚱ) 91
arev (package) . . 75, 98, 130, 131
\arg (arg) 56
\Aries (♈) 79
\Aries (♈) 79
\aries (♈) 79
\ArrowBoldDownRight (➥) . . 84
\ArrowBoldRightCircled (➲) 84
\ArrowBoldRightShort (➧) . . . 84
\ArrowBoldRightStrobe (➠) . 84
\ArrowBoldUpRight (➦) 84
\Arrownot (⫽) 55
\arrownot (⫻) 55
arrows 47–50, 54, 68–70, 80, 84, 91, 96, 101, 113
  diagonal, for reducing subexpressions 66
  dotted 70
  double-headed, diagonal 117
  extensible 66–70
  fletched 54, 84
  negated 48, 49, 51
\Arrowvert ( ) 61
\Arrowvert ( ) 63
\arrowvert ( ) 61
\arrowvert ( ) 63
Arseneau, Donald 115–118
\Asade (⅄) 91
\Asamekh (◇) 91
ASCII . . 9, 11, 81, 110, 124–126, 128, 130
  table 125
ascii (package) . 81, 125, 130, 131
\ascnode (☊) 79
\Ashin (ω) 91
aspect ratio 78
\ast (∗) 26
\ast (∗) 24
\ast (∗) 26
\Asteriscus (※) 105
\asteriscus (※) 105
\Asterisk (⁎) 26
\Asterisk (✻) 87
\asterisk (∗) 26
\AsteriskBold (✱) 87
\AsteriskCenterOpen (✲) . . . 87
\AsteriskRoundedEnds (✿) . . 87

asterisks 26, 87, 88
\AsteriskThin (⁎) 87
\AsteriskThinCenterOpen (⁑) 87
\asterism (⁂) 114
astrological symbols 79
astronomical symbols . . . 79, 108
\astrosun (☉) 79
\asymp (≍) 34
\asymp (≭) 55
\atan (atan) 123
\ataribox (🅰) 98
\Atav (+) 91
\Ateth (§) 91
\AtForty (🅰) 100
\AtNinetyFive (🅰) 100
atomic math objects . . . 56, 123
\AtSixty (🅰) 100
\autoleftarrow (←——) 69
\autoleftrightharpoons (⥊) 69
\autorightarrow (——→) . . . 69
\autorightleftharpoons (⥋) 69
\Avav (ʔ) 91
average 23
\Ayn (ʿ) 15
\Ayod (ﬞ) 91
\Azayin (=) 91

B

\B 11
\B (ʖ) 105
b (esvect package option) 68
\b (▪) 16
\b (◡) 105
\Ba (⊤) 95
babel (package) 57, 97
\babygamma (ɣ) 14
\backapprox (≊) 36
\backapproxeq (≋) 36
\backcong (≌) 36
\backepsilon (϶) 34
\backeqsim (⋍) 36
\backneg (⌐) 74
\backprime (‵) 73
\backprime (‵) 74
\backsim (∽) 34
\backsim (∽) 37
\backsimeq (⋍) 34
\backsimeq (≃) 37
\backslash (\) 61, 73
\backslash (\) 62
\backslashdiv (⦸) 26
\backtriplesim (≋) 37
\Baii (⊤) 95
\Baiii (⊤) 95
banana brackets . . . . *see* \llparenthesis *and* \rrparenthesis
\banceps (x̄) 106
\bar (▪) 65
\barb (ɓ) 14
\barbbrevis (ᵬ) 106
\barbrevis (ᵭ) 106
\barcirc (⊖) 115
\bard (ɗ) 14
\bari (ɨ) 14
\barin (ɘ̄) 59
\barj (ɟ) 15
\barl (ɬ) 14
\barlambda (ƛ) 15
\barleftharpoon (⥫) 49
\baro (ɸ) 25
\baro (ɸ vs. ɵ) 111
\baro (ɵ) 14
\barp (ᵽ) 14
barred letters 114
\barrightharpoon (⥭) 49
\barsci (ɨ) 14
\barscu (ʉ) 14
\Bart ( ) 106
\baru (ʉ) 14
\barwedge (⊼) 26
\barwedge (⊼) 24
base-twelve digits 72
\Bat (🦇) 101
\Bau (⊳) 95
\bauarrow (-) 84
\baucircle (⊙) 90
\baucircle (●) 90
\baucross (✖) 86
\baudash (▬) 101
\baueclipse (●) 90
\bauequal (▬) 101
\bauface ( ) 101
\bauforms (⊕) 101
\bauforms ( ) 101
\bauhead ( ) 101
\bauhead ( ) 101
\bauhole (●) 90
\bauplus (✚) 101
\baupunct (●) 90
\bauquarter (◔) 101
\bauquestion (?) 101
\bausquare (■) 90
\bausquare (■) 90
\bautriangle (▲) 90
\bautriangle (▲) 90
\bauwhitearrow (⇨) 84
\bauwindow (⊞) 101
\BB (ᵬ) 105
\Bb (ᵬ) 105
\bB (ᵬ) 105
\bb (◡) 105
\bba (ᵡ) 105
\bbalpha (ɑ) 76
\bbar (ƀ) 114
\bbb (ᵕ) 105
\bbbeta (β) 76
\Bbbk (𝕜) 59
bbding (package) . 84–87, 89, 90, 111, 130, 131
\bbdollar ($) 76
\bbetter (⁒) 104
\bbeuro (€) 76
\bbfinalnun (ן) 76
\bbgamma (ɣ) 76
bbgreekl (mathbbol package option) 76
\BBm (ᵚ) 105
\Bbm (ᵚ) 105
\bBm (ᵚ) 105
bbm (package) 76, 130
\bbm (◡) 105
\bbmb (ᵕ) 105
\bbmx (ᵡ) 105
\bbnabla (▽) 76
bbold (package) 76, 130
\bbpe (ᵽ) 76
\bbqof (ɸ) 76
\bbrevis (◡) 106
\bbslash (\) 25
\bbyod (ʸ) 76
\bcontraction 119
\Bda (⊢) 95
\Bde (⊼) 95
\bdecisive (⋍) 104
\Bdi (⊤) 95
\Bdo (⊺) 95
\Bdu (⊤) 95
\Bdwe (⊻) 95
\Bdwo (⊼) 95
\Be (⊼) 95
\Beam (▬) 82
\Bearing (⊼) 82
\because (∵) 34, 71
\because (∵) 71
\BEL (•) 81
\bell (🔔) 98
Berry, Karl 133
\beta (β) 57
\betaup (β) 57
\beth (ב) 58

\beth (ℶ) 58
\betteris (⌓) 104
\between (≬) 36
\between (≬) 34
\between (≬) 37
\Bi (⚦) 95
\bibridge (🌉) 18
biconditional *see* \leftrightarrow *and* \equiv
\Bicycle (🚲) 100
\Big 110, 112
\big 110, 112
big O (𝔒) . . *see* alphabets, math
\bigast (∗) 26
\bigbosonloop ( ) 83
\bigbosonloopA ( ) 83
\bigbosonloopV ( ) 83
\bigbox (□) 29
\bigboxasterisk (⊛) 30
\bigboxbackslash (⧅) 30
\bigboxbot (⊡) 30
\bigboxcirc (⊡) 30
\bigboxcoasterisk (⊛) 30
\bigboxdiv (⊡) 30
\bigboxdot (⊡) 30
\bigboxleft (⊡) 30
\bigboxminus (⊡) 30
\bigboxplus (⊡) 30
\bigboxright (⊡) 30
\bigboxslash (⊡) 30
\bigboxtimes (⊡) 30
\bigboxtop (⊡) 30
\bigboxtriangleup (⊡) 30
\bigboxvoid (⊡) 30
\bigcap (⋂) 29
\bigcap (∩) 32
\bigcapdot (⩀) 32
\bigcapplus (⩁) 32
\bigcirc (◯) 24
\bigcirc (○) 88
\BigCircle (◯) 89
\bigcircle (○) 32
\bigcoast (⊛) 26
\bigcomplementop (∁) 30
\BigCross (⨯) 89
\bigcup (⋃) 29
\bigcup (∪) 32
\bigcupdot (⊍) 32
\bigcupplus (⊎) 33
\bigcupplus (⊎) 32
\bigcurlyvee (⋎) 30
\bigcurlyvee (⋎) 29
\bigcurlyvee (⋎) 32
\bigcurlyveedot (⟇) 32
\bigcurlywedge (⋏) 30
\bigcurlywedge (⋏) 29
\bigcurlywedge (⋏) 32
\bigcurlywedgedot (⟑) 32
\BigDiamondshape (◇) 89
\bigdoublecurlyvee (⩛) 33
\bigdoublecurlywedge (⩜) . . 33
\bigdoublevee (⩔) 33
\bigdoublewedge (⩓) 33
\Bigg 110, 112
\bigg 110, 112
\BigHBar (⨲) 89
\biginterleave (⫼) 29
\BigLowerDiamond (◆) 89
\bignplus (⨁) 29
\bigoast (⊛) 33
\bigoasterisk (⊛) 30
\bigobackslash (⦸) 30
\bigobackslash (⦸) 33
\bigobot (⦶) 30
\bigocirc (⦾) 30
\bigocirc (⊚) 33
\bigocoasterisk (⊛) 30
\bigodiv (⨀) 30
\bigodot (⨀) 29
\bigodot (⊙) 33
\bigoleft (⦵) 30
\bigominus (⦶) 30
\bigominus (⊖) 32
\bigoplus (⨁) 29
\bigoplus (⊕) 32
\bigoright (⦶) 30
\bigoslash (⦸) 30
\bigoslash (⊘) 32
\bigostar (⊛) 32
\bigotimes (⨂) 29
\bigotimes (⊗) 32
\bigotop (⦶) 30
\bigotriangle (⧋) 32
\bigotriangleup (⧋) 30
\bigovert (⦶) 32
\bigovoid (⦸) 30
\bigparallel (⫼) 29
\bigparr (⅋) 33
\bigplus (+) 30
\bigplus (+) 32
\BigRightDiamond (◆) 89
\bigsqcap (⨅) 30
\bigsqcap (⨅) 29
\bigsqcap (⨅) 32
\bigsqcapdot (⩀) 32
\bigsqcapplus (⨇) 31
\bigsqcapplus (⨇) 32
\bigsqcup (⨆) 29
\bigsqcup (⊔) 33
\bigsqcupdot (⊍) 33
\bigsqcupplus (⨈) 31
\bigsqcupplus (⨈) 33
\BigSquare (□) 89
\bigsquplus (⨄) 30
\bigstar (★) 26
\bigstar (★) 73
\bigstar (★) 88
\bigtimes (×) 30
\bigtimes (×) 33
\BigTriangleDown (▽) 89
\bigtriangledown (▽) 29
\bigtriangledown (▽ vs. ▽) 111
\bigtriangledown (▽) 24
\bigtriangledown (▽) 47
\BigTriangleLeft (◁) 89
\BigTriangleRight (▷) 89
\BigTriangleUp (△) 89
\bigtriangleup (△) 29
\bigtriangleup (△ vs. △) . 111
\bigtriangleup (△) 24
\bigtriangleup (△) 47
\biguplus (⨄) 29
\biguplus (⨄) 33
\bigvarstar (★) 26
\BigVBar (❘) 89
\bigvee (⋁) 29
\bigvee (∨) 33
\bigveedot (⟇) 33
\bigwedge (⋀) 29
\bigwedge (∧) 33
\bigwedgedot (⟑) 33
\bigwith (&) 33
\binampersand (&) 25
binary operators 24–28
binary relations 34–36, 39–45, 54, 55
negated 34–36, 38
\bindnasrepma (⅋) 25
\Biohazard (☣) 82
biological symbols 82
birds 92
bishop 104
\bishoppair (👯) 104
\Bja (𓃰) 95
\Bje (𓄿) 95
\Bjo (𓃀) 95
\Bju (𓃠) 95
\Bka (𓎛) 95
\Bke (𓐍) 95
\Bki (𓎼) 95
\Bko (𓏏) 95
\Bku (𓎾) 95
\BlackBishopOnBlack ( ) 104
\BlackBishopOnWhite ( ) 104
blackboard bold . *see* alphabets, math

\blackdiamond (⬥) 26
\BlackEmptySquare ( ) . 104
\BlackKingOnBlack ( ) . 104
\BlackKingOnWhite ( ) . 104
\BlackKnightOnBlack ( ) 104
\BlackKnightOnWhite ( ) 104
\blacklozenge (⧫) 73
\blacklozenge (⧫) 88
\BlackPawnOnBlack ( ) . 104
\BlackPawnOnWhite ( ) . 104
\BlackQueenOnBlack ( ) 104
\BlackQueenOnWhite ( ) 104
\BlackRookOnBlack ( ) . 104
\BlackRookOnWhite ( ) . 104
\blacksmiley (☻) 98
\blacksquare (■) 73
\blacksquare (■) 28
\blackstone 105
\blacktriangle (▲) 73
\blacktriangle (▲) 47
\blacktriangledown (▾) 28
\blacktriangledown (▼) 73
\blacktriangledown (▼) 47
\blacktriangleleft (◂) 28
\blacktriangleleft (◀) 46
\blacktriangleleft (◀) 47
\blacktriangleright (▸) . . . 28
\blacktriangleright (▶) . . . 46
\blacktriangleright (▶) . . . 47
\blacktriangleup (▴) 28
blank . . . . . *see* \textblank
\Bleech (△) 100
\blitza () 23, 55
\blitzb () 55
\blitzc () 55
\blitzd () 55
\blitze () 55
block-element symbols 107
\Bm (♌) 105
bm (package) 124, 130, 132
\bm 124
\bm (♌) 105
\Bma () 95
\Bme () 95
\Bmi () 95
\Bmo () 95
\bmod 56
\Bmu () 95
\Bna () 95
\BNc () 95
\BNcc () 95
\BNccc () 95
\BNcd () 95
\BNcm () 95
\BNd () 95
\BNdc () 95
\BNdcc () 95
\BNdccc () 95
\Bne () 95
\BNi () 95
\Bni () 95
\BNii () 95
\BNiii () 95
\BNiv () 95
\BNix () 95
\BNl () 95
\BNlx () 95
\BNlxx () 95
\BNlxxx () 95
\BNm () 95
\Bno () 95
\Bnu () 95
\BNv () 95
\BNvi () 95
\BNvii () 95
\BNviii () 95
\Bnwa () 95
\BNx () 95
\BNxc () 95
\BNxl () 95
\BNxx () 95
\BNxxx () 95
\Bo () 95
body-text symbols 10–22
bold symbols 123–124
\boldmath 124
\boldsymbol 124
\bomb () 101
Boolean domain (𝔹) . . . . . *see* alphabets, math
Boolean logic gates 81
born . . . . . *see* \textborn
bosons 83
\bot (⊥) 23, 59, 116
\bot (⊥) 59
\botdoteq (≒) 36
\Bouquet () 101
\Bowtie (⋈) 98
\bowtie (⋈) 34
\bowtie (⋈) 26, 27
\Box (☐) 73
\Box (□) 73
\Box (□) 28
box-drawing symbols 107
\boxast (⊠) 25
\boxasterisk () 28
\boxbackslash () 28
\boxbackslash (⧅) 28
\boxbar (⧈) 25
\boxbot () 28
\boxbox (⧈) 25
\boxbox () 28
\boxbslash (⧅) 25
\boxcirc () 28
\boxcircle () 25
\boxcoasterisk () 28
\boxdiv () 28
\boxdot () 28
\boxdot (⊡) 24, 25
\boxdot () 28
\boxdotLeft () 49
\boxdotleft () 49
\boxdotRight () 49
\boxdotright () 49
\boxempty (☐) 25
\boxLeft () 49
\boxleft () 28
\boxleft () 49
\boxminus () 28
\boxminus (⊟) 24
\boxminus () 28
\boxplus () 28
\boxplus (⊞) 24
\boxplus () 28
\boxRight () 49
\boxright () 28
\boxright () 49
\boxslash () 28
\boxslash (⧄) 25
\boxslash (⧄) 28
\boxtimes () 28
\boxtimes (⊠) 24
\boxtimes (⊠) 28
\boxtop () 28
\boxtriangleup () 28
\boxvert () 28
\boxvoid () 28
\boy (♂) 79
\Bpa () 95
\Bpaiii () 95
\BPamphora () 96
\BParrow () 96
\BPbarley () 96

\BPbilly ( ) 96
\BPboar ( ) 96
\BPbronze ( ) 96
\BPbull ( ) 96
\BPcauldroni ( ) 96
\BPcauldronii ( ) 96
\BPchariot ( ) 96
\BPchassis ( ) 96
\BPcloth ( ) 96
\BPcow ( ) 96
\BPcup ( ) 96
\Bpe ( ) 95
\BPewe ( ) 96
\BPfoal ( ) 96
\BPgoat ( ) 96
\BPgoblet ( ) 96
\BPgold ( ) 96
\BPhorse ( ) 96
\Bpi ( ) 95
\BPman ( ) 96
\BPnanny ( ) 96
\Bpo ( ) 95
\BPolive ( ) 96
\BPox ( ) 96
\BPpig ( ) 96
\BPram ( ) 96
\BPsheep ( ) 96
\BPsow ( ) 96
\BPspear ( ) 96
\BPsword ( ) 96
\BPtalent ( ) 95
\Bpte ( ) 95
\Bpu ( ) 95
\Bpuii ( ) 95
\BPvola ( ) 95
\BPvolb ( ) 95
\BPvolcd ( ) 95
\BPvolcf ( ) 95
\BPwheat ( ) 96
\BPwheel ( ) 96
\BPwine ( ) 96
\BPwineiih ( ) 96
\BPwineiiih ( ) 96
\BPwineivh ( ) 96
\BPwoman ( ) 96
\BPwool ( ) 96
\BPwta ( ) 95
\BPwtb ( ) 95
\BPwtc ( ) 95
\BPwtd ( ) 95
\Bqa ( ) 95
\Bqe ( ) 95
\Bqi ( ) 95
\Bqo ( ) 95
\Bra ( ) 95
bra 61
\braceld ( ) 119
\bracerd ( ) 119
\bracevert ( ) 61
\bracevert ( ) 63
brackets . . . . . *see* delimiters
\Braii ( ) 95
\Braiii ( ) 95
braket (package) 61
\Bre ( ) 95
\Break (Break) 80
\breve ( ) 65
\breve ( ) 18
breve ( ) . . . . . *see* accents
\brevis ( ) 106
\Bri ( ) 95
\Bro ( ) 95
\Broii ( ) 95
\brokenvert ( ) 98
Bronger, Torsten 116
\Bru ( ) 95
\BS ( ) 81
\Bsa ( ) 95
\Bse ( ) 95
\BSEfree ( ) 82
\Bsi ( ) 95
\Bso ( ) 95
\BSpace ( ) 80
\Bsu ( ) 95
\Bswa ( ) 95
\Bswi ( ) 95
\Bta ( ) 95
\Btaii ( ) 95
\Bte ( ) 95
\Bti ( ) 95
\Bto ( ) 95
\Btu ( ) 95
\Btwe ( ) 96
\Btwo ( ) 95
\Bu ( ) 95
\BUFd ( ) 81
buffers 81
\BUFl ( ) 81
\BUFr ( ) 81
\BUFu ( ) 81
\BUi ( ) 96
\BUii ( ) 96
\BUiii ( ) 96
\BUiv ( ) 96
\BUix ( ) 96
\bullet ( ) 24
\bullet ( ) 26
bullseye . . . *see* \textbullseye
\Bumpedeq ( ) 36
\bumpedeq ( ) 36
\Bumpeq ( ) 34
\Bumpeq ( ) 37
\bumpeq ( ) 34
\bumpeq ( ) 37
\bupperhand ( ) 104
\Burns ( ) 106
\BusWidth ( ) 81
\BUv ( ) 96
\BUvi ( ) 96
\BUvii ( ) 96
\BUviii ( ) 96
\BUx ( ) 96
\BUxi ( ) 96
\BUxii ( ) 96
\Bwa ( ) 95
\Bwe ( ) 95
\Bwi ( ) 95
\Bwo ( ) 95
\Bza ( ) 95
\Bze ( ) 95
\Bzo ( ) 95

C

\C ( ) 105
c (esvect package option) 68
\c ( ) 16, 127
\c (|) 105
\Ca ( ) 96
calligra (package) . . . 76, 130, 132
Calligra (font) 76
calrsfs (package) 76
\CAN ( ) 81
cancel (package) 66
\Cancer ( ) 79
\cancer ( ) 79
\Cap ( ) 24
\Cap ( ) 27
\cap ( ) 26
\cap ( ) 24

\cap (∩) 26
\capdot (⩀) 26
\capplus (⩅) 26
\Capricorn (♑) 79
\capricornus (♑) 79
\capturesymbol (×) 104
card suits 73–75, 90
cardinality . . . . . *see* \aleph
care of (℅) 74
caret . . . . . *see* \^
Carlisle, David 1, 129, 130
caron (ǎ) . . . . . *see* accents
carriage return . . 80, 81, 90, 113
\carriagereturn (⏎) 90
Cartesian product . . *see* \times
castle 104
\castlingchar (O) 104
\castlinghyphen (-) 104
\catal (⌢) 106
\Catalexis (∧) 105
\catalexis (∧) 105
catamorphism *see* \llparenthesis *and* \rrparenthesis
\cb (ḉ) 19
\Cc (‖) 105
\cc (🅭) 21
\cc (‖) 105
\ccby (🅭) 21
\Ccc (⫴) 105
cclicenses (package) . 21, 130, 131
\ccnc (🄭) 21
\ccnd (🄳) 21
\ccsa (🄯) 21
\cdot (·) 24, 114
\cdot (·) 26, 71
\cdotp (·) 70
\cdotp (·) 71
\cdots (⋯) 70
\Ce (⁕) 96
Cedi . . *see* \textcolonmonetary
cedilla (ç) . . . . . *see* accents
celestial bodies 79, 108
\celsius (℃) 78
\Celtcross (✟) 101
\cent (¢) 20
\centerdot (▪) 26
\centerdot (∙) 24
centernot (package) 115
\centernot 115
centigrade . . . *see* \textcelsius
\centre (⊞) 104
cents . . . . . *see* \textcent
\CEsign (ϾЄ) 82
\Cga (⁾˘) 96
chancery (package) 130
\changenotsign 36
\char 9, 113, 122, 125, 129
Charter (font) 20, 33
\check (ǎ) 65
check marks . 11, 74, 86, 90, 98, 100, 111
\checked (✓) 98
\CheckedBox (☑) 86
\Checkedbox (☑) 100
\Checkmark (✓) 86
\checkmark (✓) 11
\checkmark (✓) 74
\checkmark (✓ vs. ✓) 111
\checkmark (✓) 90
\CheckmarkBold (✔) 86
\checksymbol (+) 104
chemarr (package) . . 69, 130, 131
chemarrow (package) 54, 69, 130
\chemarrow (→) 54
Chen, Raymond 133
chess symbols 104
\chesscomment (RR) 104
\chessetc (‖) 104
\chesssee (—) 104
\chi (χ) 57
china2e (package) . 21, 56, 76, 77, 108, 109, 130, 132
\chiup (χ) 57
\Ci (⁜) 96
cipher symbols 108
\circ (∘) 24, 74, 115
\circ (∘) 26
\circeq (≗) 36
\circeq (≗) 34
\circeq (≗) 37
\CIRCLE (●) 98
\Circle (○) 89
\Circle (○ vs. ○) 111
\Circle (○) 98
\circlearrowleft (↺) 49
\circlearrowleft (↺) 48
\circlearrowleft (↺) 51
\circlearrowright (↻) 49
\circlearrowright (↻) 48
\circlearrowright (↻) 51
circled numbers 87, 105
\CircledA (Ⓐ) 101
\circledast (⊛) 24
\circledast (⊛) 28
\circledbar (⦶) 25
\circledbslash (⦸) 25
\circledcirc (◎) 24
\circledcirc (◎) 28
\circleddash (⊝) 24
\circleddash (⊝) 28
\circleddot . . . . . *see* \odot
\circleddotleft (↺⊙) 49
\circleddotright (⊙↻) 49
\circledgtr (⧁) 35
\circledless (⧀) 35
\circledminus . . . . *see* \ominus
\circledotleft . . . . . *see* \circleddotleft
\circledotright . . . . . *see* \circleddotright
\circledplus . . . . . *see* \oplus
\circledR (®) 11, 59
\circledS (Ⓢ) 59
\circledslash . . . . *see* \oslash
\circledtimes . . . . *see* \otimes
\circledvee (⍱) 25
\circledwedge (⍲) 25
\circleleft (←○) 49
\circleright (○→) 49
circles 89–90, 98, 105
\CircleShadow (◯) 89
\CircleSolid (●) 89
\Circpipe (⭘) 82
\circplus (⨣) 26
\Circsteel (●) 82
circumflex (â) . . . . . *see* accents
\circumflexus (ã) 18
\Cja (⟨) 96
\Cjo (⋎) 96
\Cka (↥) 96
\Cke (↙) 96
\Cki (⇈) 96
\Cko (⋂) 96
\Cku (⁜) 96
\Cla (⋁) 96
\Cle (∞) 96
\CleaningA (Ⓐ) 100
\CleaningF (Ⓕ) 100
\CleaningFF (Ⓕ) 100
\CleaningP (Ⓟ) 100
\CleaningPP (Ⓟ) 100
\Cli (≤) 96
\clickb (⊙) 14
\clickc (C) 14
\clickt (ɻ) 14
\Clo (+) 96
clock (package) . . . 102, 130, 131
\clock (🕓) 102
\clock (🕒) 98
clock symbols 98, 100, 102
\ClockFramefalse 102
\ClockFrametrue 102
\Clocklogo (🕒) 100
\ClockStyle 102
\clocktime 102
\closedcurlyvee (⋎) 26
\closedcurlywedge (⋏) 26
\closedequal (≕) 37
\closedniomega (⍵) 14
\closedprec (≺) 37

\closedrevepsilon (ɜ) 14
\closedsucc (≻) 37
\Cloud (☁) 101
clovers 87, 88
\Clu (⋓) 96
clubs (suit) 73–75, 90
\clubsuit (♣) 73
\clubsuit (♣) 74
\Cma (⋏) 96
\Cme (⋋) 96
\Cmi (⋎) 96
cmll (package) 23, 27, 33, 40, 130
\Cmo (⋔) 96
\Cmu (⋒) 96
\Cna (⊼) 96
\Cne (⋕) 96
\Cni (⋽) 96
\Cno (⫽) 96
\Cnu (⋏) 96
\Co (⩛) 96
\coAsterisk (⍟) 26
\coasterisk (⊛) 26
code page 1252 126
table 128
code page 437 . . . . . 81, 107, 125
\Coffeecup (☕) 100
\coh (⌔) 40
coins, ancient 21
\colon 70
\colon (:) 70
\colon (:) 71
\Colonapprox (::≈) 35
\Colonapprox (::≈) 39
\colonapprox (:≈) 41
\colonapprox (:≈) 39
\colonapprox (:≈) 35
\coloncolon (::) 41
\coloncolonapprox (::≈) 41
\coloncolonequals (::=) 41
\coloncolonminus (::−) 41
\coloncolonsim (::∼) 41
\Coloneq (::−) 35
\Coloneq (::−) 39
\coloneq (:=) 23, 36
\coloneq (:−) 39
\coloneq (:−) 35
\coloneq (:=) 37
\Coloneqq (::=) 35
\Coloneqq (::=) 39
\coloneqq (:=) 39
\coloneqq (:=) 23, 35
colonequals (package) 23, 41, 130, 131
\colonequals (:=) 23, 41
\colonminus (:−) 41
\Colonsim (::∼) 35
\Colonsim (::∼) 39
\colonsim (:∼) 41
\colonsim (:∼) 39
\colonsim (:∼) 35
combelow (package) . 19, 130, 132
combinatorial logic gates 81
comma-below accent (◌̦) . . . . *see* accents
communication symbols 82
commutative diagrams 117
comp.text.tex (newsgroup) 9, 23, 24, 113–118
\compensation (⧷) 104
\complement (∁) 59
\complement (𝐂) 59
\complement (ℂ) 32
complete shuffle product (⧢) . 27
\COMPLEX (𝐂) 56
\Complex (ℂ) 56
complex numbers (ℂ) . . . . . *see* alphabets, math
composited accents 16
Comprehensive TEX Archive Network 1, 9, 66, 77, 110, 126, 129, 130
computer hardware symbols . . 80
computer keys 80
Computer Modern (font) 110, 112, 125
\ComputerMouse (🖱) 80
\cong (≅) 34
\cong (≅) 37
congruent . . . . . *see* \equiv
\conjunction (⋀) 79
conjunction, logical . *see* \wedge *and* \&
consequence relations 39
contradiction symbols . . . 23, 55
control characters 81
converse implication . . . . . *see* \leftarrow *and* \subset
converse nonimplication . . . . *see* \nleftarrow *and* \nsubset
\convolution (∗) 26
\Coppa (Ϙ) 97
\coppa (ϙ) 97
\coprod (∐) 23, 29
\coprod (⨿) 32
copyright 10, 21, 127
\copyright (©) 10
\corner (⌝) 20
corners, box 107
\corona (⌓) 106
\coronainv (⌓) 106
\Corresponds (≙) 74
\corresponds (≙) 36
\cos (cos) 56, 123
\cosh (cosh) 56
\cot (cot) 56
\coth (coth) 56
\counterplay (⇆) 104
Courier (font) 20
CP1252 . . . . *see* code page 1252
CP437 . . . . . *see* code page 437
\Cpa (⨡) 96
\Cpe (⋐) 96
\Cpi (⋓) 96
\Cpo (⋒) 96
\Cpu (⋓) 96
\CR (♪) 81
\cr 115
\Cra (⋒) 96
\Cre (⋔) 96
Creative Commons licenses . . 21
crescent (fge package option) . 65
\Cri (⋏) 96
\Cro (⋎) 96
\Cross (⨯) 89
\Cross (✝ vs. ✝ vs. ⨯) 111
\Cross (✝) 86
\Cross (†) 101
cross ratio . . . . *see* \textrecipe
\crossb (♄) 14
\CrossBoldOutline (✟) 86
\CrossClowerTips (✣) 86
\crossd (ⅆ) 14
\Crossedbox (🕱) 100
crosses 86, 101, 105
\crossh (ℏ) 14
\CrossMaltese (✠) 86
\crossnilambda (ƛ) 14
\CrossOpenShadow (✞) 86
\CrossOutline (✟) 86
crotchet . . . . *see* musical symbols
\crtilde (◌̃) 18
\Cru (⋏) 96
crucifixes 86, 101
\Crux (†) 65
\crux (†) 65
\Csa (⋎) 96
\csc (csc) 56
\Cse (⋓) 96
\cshuffle (⧢) 27
\Csi (⋏) 96
\Cso (⋒) 96
\Csu (⋔) 96
\Cta (⊢) 96
CTAN . *see* Comprehensive TEX Archive Network
\Cte (⋎) 96
\Cti (⋏) 96

\Cto (⊩) 96
\Ctrl (Ctrl) 80
\Ctu (⊪) 96
\Cu (⋎) 96
\Cube (⚀ ⚁ ⚂ ⚃ ⚄ ⚅) 102, 113
cube root . . . . . *see* \sqrt
\Cup (⋓) 24
\Cup (⋓) 27
\cup (∪) 26
\cup (∪) 24, 114, 123
\cup (∪) 26
\cupdot (⊍) 26
\cupplus (⊎) 26, 27
\curlyc (⋟) 14
\curlyeqprec (⋞) 36
\curlyeqprec (⋞) 34
\curlyeqprec (⋞) 37
\curlyeqsucc (⋟) 36
\curlyeqsucc (⋟) 34
\curlyeqsucc (⋟) 37
\curlyesh (∫) 14
\curlyvee (⋎) 26
\curlyvee (⋎) 24
\curlyvee (⋎) 26
\curlyveedot (⋎) 26
\curlyveedownarrow (⋎) 25
\curlyveeuparrow (⋎) 25
\curlywedge (⋏) 26
\curlywedge (⋏) 24
\curlywedge (⋏) 26
\curlywedgedot (⋏) 26
\curlywedgedownarrow (⋏) . . 25
\curlywedgeuparrow (⋏) 25
\curlyyogh (ʒ) 14
\curlyz (ƶ) 14
\currency (¤) 20
currency symbols 20, 21, 76
\curvearrowbotleft (⤾) . . . 49
\curvearrowbotleftright (↭) 49
\curvearrowbotright (⤿) . . . 49
\curvearrowdownup (⥯) 50
\curvearrowleft (↶) 49
\curvearrowleft (↶) 48
\curvearrowleft (↶) 51
\curvearrowleftright (↭) . . 49
\curvearrowleftright (↭) . . 50
\curvearrownesw (⤢) 50
\curvearrownwse (⤡) 50
\curvearrowright (↷) 49
\curvearrowright (↷) 48
\curvearrowright (↷) 51
\curvearrowrightleft (⇌) . . 50
\curvearrowsenw (⤡) 50
\curvearrowswne (⤢) 50
\curvearrowupdown (⥮) 50
\Cutleft (⋉) 84
\Cutline (┈) 84
cutoff subtraction . . *see* \dotdiv
\Cutright (⋊) 84
\Cwa (⋏) 96
\Cwe (⌶) 96
\Cwi (⋎) 96
\Cwo (⋀) 96
\Cxa (⋎) 96
\Cxe (⋋) 96
\Cya (⋎) 96
\Cyo (⋏) 96
\cyprfamily 96
Cypriot 96
cypriot (package) . . . 96, 130, 132
\Cza (⋎) 96
\Czo (⋏) 96

D

\D (◌̈) 19
d (esvect package option) 68
\d (◌̣) 16
\dag (†) 10, 128
\dagger (†) 24
\daleth (ℸ) 58
\daleth (ℸ) 58
\danger (⚠) 101
dangerous bend symbols 99
\DArrow (⇓) 80
\dasharrow *see* \dashrightarrow
\dasheddownarrow (⇣) 50
\dashedleftarrow (⇠) 50
\dashednearrow (⇗) 50
\dashednwarrow (⇖) 50
\dashedrightarrow (⇢) 50
\dashedsearrow (⇘) 50
\dashedswarrow (⇙) 50
\dasheduparrow (⇡) 50
\dashint (⨍) 116
\dashleftarrow (⇠) 48
\dashleftarrow (⇠) 51
\dashleftrightarrow (⇢) . . . 49
\dashrightarrow (⇢) 48
\dashrightarrow (⇢) 51
\DashV (⫤) 36
\Dashv (⫤) 36
\dashv (⊣) 34
\dashv (⊣) 37
\dashVv (⫣) 36
\davidsstar (✡) 87
\DavidStar (✡) 87
\DavidStarSolid (✡) 87
\dBar (‖) 106
\dbar (đ) 114
\dbend (⤎) 99
dblaccnt (package) 118
\dblcolon (::) 39
\DCa (◂) 81
\DCb (↕) 81
\DCc (‼) 81
\DCd (¶) 81
\DD (ⅅ) 99
\ddag (‡) 10, 128
\ddagger (‡) 24
\ddashint (⨏) 116
\ddddot (◌⃜) 65
\dddot (◌⃛) 65
\dddtstile (⫣) 39
\ddigamma (ϝ) 97
\DDohne (Ⅾ̸) 99
\ddot (◌̈) 65
\ddotdot (∴) 26, 71
\ddots (⋱) 70, 117
\ddots (⋱) 71
\ddststile (⫢) 39
\ddtstile (⫡) 39
\ddttstile (⫣) 39
\DeclareFontFamily 122
\DeclareFontShape 122
\DeclareMathOperator 123
\DeclareMathOperator* . . . 123
\declareslashed 115
\DeclareUnicodeCharacter . 128
\decofourleft (ᔕ) 88
\decofourright (ᔓ) 88
\decoone (ᔥ) 88
\decosix (✧) 88
\decothreeleft (ᔐ) 88
\decothreeright (ᔒ) 88
\decotwo (ᔖ) 88
definite-description operator (ι) 113
definition symbols 23, 118
\deg (deg) 56
\degree (○) 73
\degree (°) 78
degrees . . . . . *see* \textdegree
\DEL (⌂) 81
\Del (Del) 80
\Deleatur . . . . . *see* \Denarius
delimiters 60–65
  text-mode 65
  variable-sized 61–64
  wavy-line 62, 63
\Delta (Δ) 57
\delta (δ) 57
\deltaup (δ) 57
demisemiquaver . . . . *see* musical symbols
\Denarius (ↃI) 20
\denarius (⅃) 21
\dental (◌̪) 18
derivitive, partial . . *see* \partial
\descnode (ᘐ) 79
\det (det) 56

\devadvantage (⟃) 104
\Dfourier (⟜) 40
\dfourier (⟜) 40
\DFT (⟙) 70
\dft (⊢) 70
\DH (Ð) 14
\DH (Ð) 11, 127
\dh (ð) 14
\dh (ð) 11, 127
diacritics . . . . . *see* accents
\diaeresis (¨) 18
diæresis (¨) . . . . . *see* accents
\diagdown (╲) 73
\diagdown (╲) 73
\diagdown (╲) 37
\diagonal (⫽) 104
\diagup (╱) 73
\diagup (╱) 73
\diagup (╱) 37
\diameter (⌀) 73
\diameter (⌀) 23
\diameter (⌀) 74
\diameter (⌀) 98
\Diamond (◇) 73
\Diamond (◇) 73
\Diamond (◇) 28
\diamond (⋄) 24
\diamond (⋄) 28
\diamondbackslash (⍂) 28
\Diamondblack (◆) 73
\diamonddiamond (⟐) 28
\Diamonddot (⟡) 73
\diamonddot (⟡) 28
\DiamonddotLeft (⇐⟡) 49
\Diamonddotleft (↚⟡) 49
\DiamonddotRight (⟡⇒) 49
\Diamonddotright (⟡↛) 49
\diamonddots (∷) 26, 71
\DiamondLeft (⇐◇) 49
\Diamondleft (↚◇) 49
\diamondminus (⟔) 28
\diamondplus (⨤) 28
\DiamondRight (◇⇒) 49
\Diamondright (◇↛) 49
diamonds 89–90
diamonds (suit) 73–75, 90
\DiamondShadowA (🔷) 89
\DiamondShadowB (🔷) 89
\DiamondShadowC (🔷) 89
\Diamondshape (◇) 89
\diamondslash (⟋) 28
\DiamondSolid (◆) 89
\diamondsuit (♢) 73
\diamondsuit (♢) 74
\diamondtimes (⨻) 28
\diamondvert (⌺) 28
\diatop 20, 118
\diaunder 20, 118
dice 102, 103, 113
dictionary symbols . . . 12–15, 106
dictsym (package) . 106, 130, 131
died . . . . . *see* \textdied
differential, inexact . . *see* \dbar
\Digamma (F) 97
\digamma (𝘍) 57, 97
\digamma (ϝ) 97
digital logic gates 81
digits 72
  LCD 78
  Mayan 72
  old-style 22
  segmented 78
\dim (dim) 56
\ding 12, 84–88, 90
dingautolist 87
dingbat (package) 85, 90, 111, 130, 131
dingbat symbols 84–90
\Diple (≻) 105
\diple (≻) 105
\Diple* (⪼) 105
\diple* (⪼) 105
Dirac notation 61
discount . . . *see* \textdiscount
discretionary hyphen 126
disjoint union 23
disjunction . . . . . *see* \vee
\displaystyle . . . 116, 118, 123
ditto marks . *see* \textquotedbl
\div (÷) 24
\div (÷) 27
\divdot (⨪) 26
\divideontimes (⋇) 26
\divideontimes (⋇) 24
\divides (∣) 36
\divides (⟌) 37
division 24, 66
  non-commutative 70
division times *see* \divideontimes
divorced . . . *see* \textdivorced
\DJ (Đ) 11
\dj (đ) 11
\dlbari (ƚ) 14
\DLE (►) 81
\dlsh (↲) 49
\dndtstile (⫦) 39
\dnststile (⫥) 39
\dntstile (⫤) 39
\dnttstile (⫧) 39
do not enter . . . . . *see* \noway
does not divide . . . . . *see* \nmid
does not exist . . . . *see* \nexists
does not imply 115
\Dohne (Ǿ) 99
dollar . . . . . *see* \textdollar
dollar sign . . . . . *see* \$
\Dontwash (🜺) 100
\dot (˙) 65
dot accent (˙ or ▪) . . *see* accents
dot symbols 10, 70–72, 117
DotArrow (package) . 70, 130, 132
\dotarrow (⇢) 70
\dotcup (⊍) 23, 114
\dotdiv (∸) 26
\Doteq . . . . . *see* \doteqdot
\Doteq (≑) 37
\doteq (≐) 34
\doteq (≐) 37
\doteqdot (≒) 34
\doteqdot (≑) 37
dotless j ($\jmath$)
  text mode 16
dotless i ($\imath$)
  math mode 65, 73
  text mode 16
dotless j ($\jmath$)
  math mode 65, 73
\dotmedvert (∣) 27
\dotminus (∸) 27
\dotplus (∔) 26
\dotplus (∔) 24
\dots (…) 10, 128
dots (ellipses) . . . 10, 70–73, 117
\dotsb (⋯) 71
\dotsc (…) 71
\dotseq (≑) 36
\dotsi (⋯) 71
\dotsint (∫⋯∫) 32
\dotsm (⋯) 71
\dotso (…) 71
dotted arrows 70
dotted union (⊍̇) 123
\dottedtilde (̰) 18
\dottimes (⨱) 26
\double 64
double acute (̋) . . . *see* accents
\doublebarwedge (⩛) 26
\doublebarwedge (⩛) 24
\doublecap . . . . . *see* \Cap
\doublecap (⩋) 26
\doublecap (⩋) 27
\doublecup . . . . . *see* \Cup
\doublecup (⩊) 26
\doublecup (⩊) 27
\doublecurlyvee (⩟) 27
\doublecurlywedge (⩠) 27
\doublefrown (⩒) 55
\doublefrowneq (⩓) 55
\doublepawns (⚇) 104
\doublesmile (⩔) 55
\doublesmileeq (⩕) 55
\doublesqcap (⩏) 27

\doublesqcup (⊔) 26
\doubletilde (≋) 18
\doublevee (⩒) 26
\doublewedge (⩖) 26
\DOWNarrow (▼) 98
\Downarrow (⇓) 47, 61
\Downarrow (⇓) 50
\downarrow 123
\downarrow (↓) 47, 61
\downarrow (↓) 50
\downarrowtail (↣) 50
\downbracketfill 119
\downdownarrows (⇊) 49
\downdownarrows (⇊) 48
\downdownarrows (⇊) 50
\downdownharpoons (⥥) 49
Downes, Michael J. 56, 133
\downfilledspoon (⥯) 54
\downfootline (⎍) 37
\downfree (⎌) 37
\downharpoonccw (⇃) 53
\downharpooncw (⇂) 53
\downharpoonleft (⇃) 49
\downharpoonleft (⇃) 48
\downharpoonright (⇂) 49
\downharpoonright (⇂) 48
\downlsquigarrow (⇜) 50
\downmapsto (↧) 50
\downModels (⩣) 37
\downmodels (⫪) 37
\downp (˅) 20
\downparenthfill 119
\downpitchfork (⫛) 54
\downpropto (∝) 37
\downrsquigarrow (⇝) 50
\downslice (⪦) 28
\downspoon (⥥) 54
\downt (⊤) 20
\downtherefore (∴) 26, 71
\downtouparrow (⥯) 49
\downuparrows (⇵) 49
\downuparrows (⇵) 50
\downupharpoons (⥮) 49
\downupharpoons (⥮) 53
\downVdash (⫤) 37
\downvdash (⊤) 37
\downY (⟙) 26
dozenal (package) 72, 130
dozenal digits 72
\dracma (⊢) 21
\drsh (↳) 49
\DS (𝕾) 99
\Ds (𝖘) 99
\dsaeronautical (𝔈) 106
\dsagricultural (𝔉) 106
\dsarchitectural (𝔄) 106
\dsbiological (𝔅) 106
\dschemical (𝔊) 106
\dscommercial (𝔋) 106
\dsdtstile (⫣) 39
dsfont (package) 76, 130
\dsheraldical (𝔎) 106
\dsjuridical (𝔇) 106
\dsliterary (𝔏) 106
\dsmathematical (𝔸) 106
\dsmedical (𝔐) 106
\dsmilitary (𝔒) 106
\dsrailways (𝔓) 106
\dssttstile (⫢) 39
\dstechnical (𝔔) 106
\dststile (⫡) 39
\dsttstile (⫤) 39
\dtdtstile (⫣) 39
\dtimes (⨴) 27
\dtimes (⨴) 26
\dtststile (⫣) 39
\dttstile (⫤) 40
\dtttstile (⫤) 40
duodecimal (base-12) digits . . 72
DVI 21, 80, 120
\dz (ʤ) 14

E

e (esvect package option) 68
\e (e) 59
\e (Ɛ) 72
ε-TEX 61
\Earth (⊕) 79
\Earth (♁) 79
\earth (♁) 79
\Ecommerce (@) 20
\EightAsterisk (✳) 87
\EightFlowerPetal (❁) 87
\EightFlowerPetalRemoved (✲) 87
eighth note . *see* musical symbols
\eighthnote (♪) 98
\eighthnote (♪) 98
\EightStar (✴) 87
\EightStarBold (✸) 87
\EightStarConvex (✳) 87
\EightStarTaper (✴) 87
\ejective (ʼ) 14
electrical symbols 78
electromotive force (ℰ) . . . . . *see* alphabets, math
element of . . . . . *see* \in
\ell (ℓ) 59
\Ellipse (⬭) 89
ellipses (dots) . . . 10, 70–73, 117
ellipses (ovals) 89
\EllipseShadow (⬭) 89
\EllipseSolid (⬬) 89
\EM (↓) 81
\Email (✉) 82
\Emailct (➷) 82
\emgma (ɱ) 15
\emptyset (∅) 73
\emptyset (∅) 74
\End (End) 80
end of proof 73
\ending (⊥) 104
\eng (ŋ) 14
engineering symbols 78, 82
\engma (ɱ) 15
\ENQ (♣) 81
entails . . . . . *see* \models
\Enter (Enter) 80
\Envelope (✉) 90
envelopes 90, 109
\enya (ɲ) 15
\EOT (♦) 81
epsdice (package) . . 103, 130, 131
\epsdice (⚀⚁⚂⚃⚄⚅) 103
\epsi (ɛ) 15
\epsilon (ϵ) 57
\epsilonup (ϵ) 57
\eqbump (≎) 36
\eqbumped (≏) 36
\eqcirc (≖) 36
\eqcirc (≖) 34
\eqcirc (≖) 36
\Eqcolon (−::) 35
\Eqcolon (−::) 39
\eqcolon (=:) 36
\eqcolon (−:) 39
\eqcolon (−:) 35
\eqdot (≒) 36
\eqfrown (⌢) 55
\Eqqcolon (=::) 35
\Eqqcolon (=::) 39
\eqqcolon (=:) 39
\eqqcolon (=:) 35
\eqsim (≂) 35
\eqsim (≃) 36
\eqslantgtr (⪖) 44
\eqslantgtr (⪖) 43
\eqslantgtr (⪖) 45
\eqslantless (⪕) 44
\eqslantless (⪕) 43
\eqslantless (⪕) 45
\eqsmile (≒) 55
\equal (=) 36
\equal (=) 104
\equalclosed (⧦) 36
\equalscolon (=:) 41
\equalscoloncolon (=::) 41
\equalsfill 23, 118
equidecomposable 114
equilibrium . . . . . *see* \rightleftharpoons

\equiv (≡) 23, 34
\equiv (≡) 37
equivalence . . . . . *see* \equiv, \leftrightarrow, *and* \threesim
\equivclosed (⧦) 37
\er (ɚ) 14
es-zet . . . . . *see* \ss
\ESC (←) 81
\Esc (Esc) 80
escapable characters 10
\esh (ʃ) 14
\esh (ʃ) 15
esint (package) 32, 130
\Estatically (⛰) 82
estimated . . *see* \textestimated
esvect (package) 68, 130
\eta (η) 57
\etaup (η) 57
\ETB (↨) 81
\eth (ȸ) 73
\eth (ð) 14
\eth (ð) 15
\ETX (♥) 81
eufrak (package) 76
Euler Roman 58
\EUR (€) 20
\EURcr (€) 20
\EURdig (€) 20
\EURhv (€) 20
\Euro (€) 21
\euro 21
euro signs 20, 21
blackboard bold 76
\eurologo (€) 21
eurosym (package) . . 21, 130, 131
\EURtm (€) 20
euscript (package) 76, 130
evaluated at . . . . . *see* \vert
evil spirits 108
exclusive disjunction . . . . . *see* \nleftrightarrow \nequiv, *and* \oplus
exclusive or 113
\exists (∃) 59
\exists (∃) 59
\exists (∃) 59
\exp (exp) 56
\Explosionsafe (㊮) 82
extarrows (package) . 69, 130, 131
extensible accents . . . 66–68, 70, 118–119
extensible arrows 66–70
extensible symbols, creating 118–119
extensible tildes 66, 68
extension characters 55, 56
extpfeil (package) . . . 70, 130, 131
extraipa (package) 18, 130
\eye (👁) 90
\EyesDollar ($) 20

F

f (esvect package option) 68
faces . . . 81, 91, 98, 101, 106, 108
\fallingdotseq (≒) 36
\fallingdotseq (≒) 34
\fallingdotseq (≒) 37
\FallingEdge (⦦) 78
\fatbslash (⧹) 25
\fatsemi (⨟) 25
\fatslash (⫽) 25
\FAX (FAX) 82
\fax (FAX) 82
\Faxmachine (📠) 82
fc (package) 11, 16
\fcdice (⚀ ⚁ ⚂ ⚃ ⚄ ⚅) 103
fclfont (package) 130
\fcscore (𝍠 𝍡 𝍢 𝍣 𝍤) 103
feet . . . . . *see* \prime *and* \textquotesingle
\FEMALE (⚈) 82
\Female (♀) 82
female 13, 79, 82
\female (♀) 82
\FemaleFemale (⚢) 82
\FemaleMale (⚤) 82
\Ferli (◌) 99
\Fermi (◌) 99
fermions 83
feyn (package) 83, 130, 131
Feynman slashed character notation 115
Feynman-diagram symbols . . . 83
\feyn{a} (◌) 83
\feyn{c} (◌) 83
\feyn{fd} (◌) 83
\feyn{flS} (◌) 83
\feyn{fl} (◌) 83
\feyn{fs} (◌) 83
\feyn{fu} (◌) 83
\feyn{fv} (◌) 83
\feyn{f} (◌) 83
\feyn{g1} (◌) 83
\feyn{gd} (◌) 83
\feyn{glB} (◌) 83
\feyn{glS} (◌) 83
\feyn{glu} (◌) 83
\feyn{gl} (◌) 83
\feyn{gu} (◌) 83
\feyn{gvs} (◌) 83
\feyn{gv} (◌) 83
\feyn{g} (◌) 83
\feyn{hd} (◌) 83
\feyn{hs} (◌) 83
\feyn{hu} (◌) 83
\feyn{h} (◌) 83
\feyn{ms} (◌) 83
\feyn{m} (◌) 83
\feyn{P} (◌) 83
\feyn{p} (◌) 83
\feyn{x} (◌) 83
\FF (♀) 81
fge (package) . 54, 60, 65, 72, 75, 130, 131
fge-digits 72
\fgeA (∀) 60
\fgebackslash (\) 75
\fgebaracute (⍼) 75
\fgebarcap (⩃) 75
\fgec (ɔ) 60
\fgecap (∩) 75
\fgecapbar (⩄) 75
\fgecup (∪) 75
\fgecupacute (⍽) 75
\fgecupbar (⩅) 75
\fged (ƥ) 60
\fgee (ə) 60
\fgeeszett (ɡ) 60
\fgeeta (ɸ) 60
\fgeF (Ⅎ) 60
\fgef (ƒ) 60
\fgeinfty (⧜) 75
\fgelangle (⍂) 75
\fgelb 60
\fgelb (ɸ) 60
\fgeleftB (⩋) 60
\fgeleftC (⊂) 60
\fgeN (ɸ) 60
\fgeoverU (ɸ) 60
\fgerightarrow (⇻) 54
\fgerightB (⩌) 60
\fges (f) 60
\fgestruckone (𝟙) 72
\fgestruckzero (𝟘) 72
\fgeU (⅄) 60
\fgeuparrow (⇮) 54
\fgeupbracket (⎵) 75
\FHBOLOGO (FH) 101
\FHBOlogo (FH) 101
field (𝔽) . . . *see* alphabets, math
\file (⇔) 104
\FilledBigCircle (●) 89
\FilledBigDiamondshape (◆) 89
\FilledBigSquare (■) 89
\FilledBigTriangleDown (▼) 89
\FilledBigTriangleLeft (◀) 89
\FilledBigTriangleRight (▶) 89
\FilledBigTriangleUp (▲) . . 89
\FilledCircle (●) 89
\FilledCloud (☁) 101

\filleddiamond (⬥) 28
\FilledDiamondShadowA (⬘) . 89
\FilledDiamondShadowC (⬘) . 89
\FilledDiamondshape (◆) . . . 89
\FilledHut (⛃) 102
\filledlargestar (★) 88
\filledlozenge (⧫) 88
\filledmedlozenge (⧫) 88
\filledmedsquare (■) 28
\filledmedtriangledown (▼) 28, 47
\filledmedtriangleleft (◀) 28, 47
\filledmedtriangleright (▶) 28, 47
\filledmedtriangleup (▲) 28, 47
\FilledRainCloud (⛈) 101
\FilledSectioningDiamond (❖) 102
\FilledSmallCircle (●) . . . 89
\FilledSmallDiamondshape (◆) 89
\FilledSmallSquare (■) . . . 89
\FilledSmallTriangleDown (▼) 89
\FilledSmallTriangleLeft (◀) 89
\FilledSmallTriangleRight (▶) 89
\FilledSmallTriangleUp (▲) 89
\FilledSnowCloud (🌨) 101
\FilledSquare (■) 89
\filledsquare (▪) 28
\FilledSquareShadowA (❒) . . 89
\FilledSquareShadowC (❒) . . 89
\filledsquarewithdots (❖) . 90
\filledstar (⋆) 28
\FilledSunCloud (🌥) 101
\FilledTriangleDown (▼) . . . 89
\filledtriangledown (▾) 28, 47
\FilledTriangleLeft (◀) . . . 89
\filledtriangleleft (◂) 28, 47
\FilledTriangleRight (▶) . . 89
\filledtriangleright (▸) 28, 47
\FilledTriangleUp (▲) 89
\filledtriangleup (▴) . . 28, 47
\FilledWeakRainCloud (⛈) . 101
finger, pointing . . . . . *see* fists
finite field (𝔽) . . . *see* alphabets, math
\finpartvoice (◌) 18
\finpartvoiceless (◌) 18
\fint (⨍) 31
\fint (⨍) 32
\Finv (Ⅎ) 59
\Finv (Ⅎ) 59
\Fire (🔥) 102
fish hook . . . . . *see* \strictif
fists 85
\fivedots (∴) 26, 71
\FiveFlowerOpen (❀) 87
\FiveFlowerPetal (✿) 87
\FiveStar (★) 87
\FiveStarCenterOpen (☆) . . . 87
\FiveStarConvex (✯) 87
\FiveStarLines (☆) 87
\FiveStarOpen (☆) 87
\FiveStarOpenCircled (✪) . . 87
\FiveStarOpenDotted (✯) . . . 87
\FiveStarOutline (✯) 87
\FiveStarOutlineHeavy (✯) . 87
\FiveStarShadow (☆) 87
\Fixedbearing (⧋) 82
\fixedddots (⋱) 70
\fixedvdots (⋮) 70
fixmath (package) 124
\fj (fj) 15
\Flag (⚑) 102
\flap (ɾ) 15
\flapr (ɾ) 14
\flat (♭) 73, 98
\flat (♭) 74
\Flatsteel (▬) 82
fletched arrows 54, 84
fleurons 88, 90
florin . . . . . *see* \textflorin
\floweroneleft (❁) 88
\floweroneright (❁) 88
flowers 87, 88
Flynn, Peter 114
\Fog (🌫) 101
font encodings
  Latin 1 130
font encodings 9, 124, 126
  7-bit 9
  8-bit 9
  ASCII 130
  document 126
  limiting scope of 9
  LY1 9
  OT1 9, 11, 16, 118, 124–126
  OT2 113
  T1 . . . . . 9, 11, 16, 125, 126
  T4 . . . . . 11, 15, 16, 19
  T5 . . . . . 11, 16
  TS1 126
fontdef.dtx (file) 113, 117
fontenc (package) . . 9, 11, 16, 126
\fontencoding 9
fonts
  Calligra 76
  Charter 20, 33
  Computer Modern 110, 112, 125
  Courier 20
  Garamond 20, 33
  Helvetica 20
  Symbol 58, 113
  Times Roman 20, 112
  Type 1 . . . . . 122, 123
  Utopia 20, 33
  Zapf Chancery 76
  Zapf Dingbats 84, 87
\fontsize 110, 112
fontspec (package) 129
\Football (⚽) 100
\forall (∀) 59
\forall (∀) 59
\Force (🡻) 82
\Forward (▶) 100
\ForwardToEnd (⏭) 100
\ForwardToIndex (⏭) 100
\FourAsterisk (✢) 87
\FourClowerOpen (❀) 87
\FourClowerSolid (✾) 87
\Fourier (—○) 40
fourier (package) . 21, 41, 58, 60, 64, 68, 85, 88, 101, 130
\fourier (○—) 40
Fourier transform (ℱ) . . . . . *see* alphabets, math
\FourStar (✦) 87
\FourStarOpen (✧) 87
\fourth (⁗) 73
fractions 74
fraktur . . . . *see* alphabets, math
Freemason's cipher 108
Frege logic symbols 54, 60, 72, 75
\frown (⌒) 34
\frown (⌢) 55
frown symbols 55
\frowneq (≑) 55
\frowneqsmile (≘) 55
\frownie (☹) 98
\frownsmile (⌢) 55
\frownsmileeq (≘) 55
\Frowny (☹) 101
frowny faces 81, 98, 101
\FS (ᴸ) 81
\FullFHBO (🅱) 101
\fullmoon (○) 79
\fullmoon (○) 79
\fullnote (◦) 98

G

\G (Ğ) 16
g (esvect package option) 68
\Game (Ↄ) 59
\Game (ↄ) 59
\Gamma (Γ) 57
\gamma (γ) 57
\gammaup (γ) 57
\Ganz (ꝏ) 99
\GaPa (▬) 99
Garamond (font) 20, 33
\gcd (gcd) 56
\ge . . . . . *see* \geq
\Gemini (♊) 79
\Gemini (𝌆) 79
\gemini (♊) 79
genealogical symbols 98
\geneuro (€) 21
\geneuronarrow (€) 21
\geneurowide (€) 21
gensymb (package) 78
\Gentsroom (🕴) 100
geometric shapes 88–90, 105
\geq (⩾) 44
\geq (≥) 42, 44
\geq (≥) 45
\geqclosed (⧡) 45, 47
\geqdot (⪀) 45
\geqq (≧) 44
\geqq (≧) 43
\geqq (≧) 45
\geqslant (⩾) 43
\geqslant (⩾) 45
\geqslantdot (⪀) 45
german (keystroke package option) 80
\gets . . . . . *see* \leftarrow
\gg (≫) 44
\gg (⋙) 42
\gg (≫) 45
\ggcurly (⪼) 36
\ggg (⋙) 44
\ggg (⋙) 43
\ggg (⋙ vs. ⩾) 111
\ggg (⋙) 45
\gggtr . . . . . *see* \ggg
\gggtr (⋙) 45
ghosts 108
Gibbons, Jeremy 133
\gimel (ℷ) 58
\gimel (ג) 58
\girl (♀) 79
globe 101
\glotstop (ʔ) 14
\glottal (ʔ) 15
\gluon (ᔓᔓᔓᔓᔓ) 78
gluons 83
\gnapprox (⪊) 44
\gnapprox (⪊) 43
\gnapprox (⪊) 45
\gneq (⪈) 44
\gneq (≩) 43
\gneqq (≩) 44
\gneqq (≩) 43
\gneqq (≩) 45
\gnsim (⋧) 44
\gnsim (⋧) 43
\gnsim (⋧) 45
Go boards 105
Go stones 105
goban 105
\Goofy 106
graphics (package) 54, 113
graphicx (package) . . 19, 110, 113
\grave (ǹ) 65
grave (ǹ) . . . . . *see* accents
\gravis (ǹ) 18
greater-than signs *see* inequalities
greatest lower bound *see* \sqcap
Greek 57, 58
  blackboard bold 76
  bold 57, 124
  polytonic 57
  upright 57, 58
greek (babel package option) . 57, 97
Greek coins 21
\Greenpoint (☘) 109
Gregorio, Enrico 114, 115
\grimace (☹) 101
\GS (↭) 81
\gtr (>) 45
\gtrapprox (⪆) 44
\gtrapprox (⪆) 43
\gtrapprox (⪆) 45
\gtrclosed (⧐) 45, 47
\gtrdot (⋗) 44
\gtrdot (⋗) 43
\gtrdot (⋗) 45
\gtreqless (⋚) 44
\gtreqless (⋚) 43
\gtreqless (⋚) 45
\gtreqlessslant (⪌) 45
\gtreqqless (⪌) 44
\gtreqqless (⪌) 43
\gtreqqless (⪌) 45
\gtrless (≷) 44
\gtrless (≷) 43
\gtrless (≷) 45
\gtrneqqless (⪌) 45
\gtrsim (≳) 44
\gtrsim (≳) 43
\gtrsim (≳) 45
\guillemotleft («) 11, 127
\guillemotright (») . . . 11, 127
\guilsinglleft (‹) 11, 128
\guilsinglright (›) . . . 11, 128
\gvcropped (ᔕ) 83
\gvertneqq (≩) 44
\gvertneqq (≩) 43
\gvertneqq (≩) 45

H

\H (ȟ) 16
h (esvect package option) 68
\h (ȟ) 16
\HA (ـــ) 92
\Ha (ـــ) 92
háček (ǹ) . . . . . *see* accents
\Hail (∴) 101
\Halb (𝅗𝅥) 99
half note . . . *see* musical symbols
\HalfCircleLeft (◖) 89
\HalfCircleRight (◗) 89
\HalfFilledHut (⛆) 102
\halflength (ˑ) 20
\halfnote (𝅗𝅥) 98
\HalfSun (🌦) 101
Hamiltonian ($\mathscr{H}$) . *see* alphabets, math
\HandCuffLeft (🤜) 85
\HandCuffLeftUp (🤜) 85
\HandCuffRight (🤛) 85
\HandCuffRightUp (🤛) 85
\HandLeft (🤜) 85
\HandLeftUp (🤜) 85
\HandPencilLeft (✍) 85
\HandRight (☞) 85
\HandRightUp (☞) 85
hands . . . . . *see* fists
\Handwash (🧼) 100
\HaPa (▬) 99
harmony (package) . . 99, 130, 131
harpoon (package) . . 54, 130, 132
harpoons 48, 49, 53, 54
\hash (#) 73
hash mark . . . . . *see* \#
\hat (ȟ) 65
\hateq (≙) 37
\hausaB (Ɓ) 15
\hausab (ɓ) 15
\hausaD (Ɗ) 15
\hausad (ɗ) 15
\hausaK (Ƙ) 15
\hausak (ƙ) 15
\HB (Ɓ) 92
\Hb (ɓ) 92
\HBar (¯) 89
\hbar (ħ) 59, 114
\hbipropto (∝) 26
\HC (⊜) 92

\Hc (ɦ) 92
\hcrossing (⨯) 37
\HCthousand (ʮ) 92
\HD (ʭ) 92
\Hd (ɗ) 92
\hdotdot (‥) 26, 71
\hdots (⋯) 71
\Hdual (⩛) 92
\HE (ɤɤ) 92
\He (ɘ) 92
heads . . . . . *see* faces
\Heart (♡) 101
hearts (suit) 73–75, 90
\heartsuit (♡) 73
\heartsuit (♡) 74
Hebrew 58, 76
Helvetica (font) 20
\hemiobelion (ↄ) 21
\HERMAPHRODITE (⚥) 82
\Hermaphrodite (⚥) 82
\hexagon (⬡) 88
\Hexasteel (⯃) 82
\hexstar (✳) 87
\HF (F) 78
\HF (ɸ) 92
\Hf (ɬ) 92
\hfermion (⨍) 83
\hfil 115
\HG (ʛ) 92
\Hg (ɢ) 92
\HH 99
\HH (ʜ) 92
\Hh (ɧ) 92
hhcount (package) . 103, 130, 132
\Hhundred (ʔ) 92
\HI (ɪ) 92
\Hi (ɦ) 92
\hiatus (ʰ) 106
\Hibl (ʩ) 92
\Hibp (ʥ) 92
\Hibs (ʤ) 92
\Hibw (ʨ) 92
hieroglf (package) . . 92, 130, 131
hieroglyphics 92
Hilbert space (ℋ) *see* alphabets, math
\hill (◌̩) 18
\HJ (ʝ) 92
\Hj (ɭ) 92
\HK (ʞ) 92
\Hk (ʞ) 92
\hksqrt (√◌) 116
\HL (ʎ) 92
\Hl (ʟ) 92
\HM (ɱ) 92
\Hm (ɯ) 92
\Hman (ɯ) 92
\Hmillion (ɯ) 92
\Hms (ɯ) 92
\HN (ɲ) 92
\Hn (ɳ) 92
\HO (ʘ) 92
\Ho (ɸ) 92
Holt, Alexander 1, 129
\holter (◌) 70
holtpolt (package) 70, 130
\hom (hom) 56
\Home (Home) 80
\Homer ( ) 106
\Hone (ı) 92
hook accent (◌̡) . . . . *see* accents
\hookb (ɓ) 14
\hookd (ɗ) 14
\hookd (ɗ) 15
\hookdownminus (⌐) 74
\hookg (ɠ) 14
\hookh (ɦ) 14
\hookheng (ɧ) 14
\hookleftarrow (↩) 47
\hookleftarrow (↩) 51
\hookrevepsilon (ɜ) 14
\hookrightarrow (↪) 47
\hookrightarrow (↪) 51
\hookupminus (⌙) 74
Horn, Berthold 77
\HP (ɥ) 92
\Hp (ɸ) 92
\Hplural (ı ı ı) 92
\Hplus (ɧ) 92
\HQ (ʠ) 92
\Hq (ʠ) 92
\Hquery (ʔ) 92
\HR (ʁ) 92
\Hr (ɹ) 92
\HS (ʂ) 92
\Hs (ʃ) 92
\Hscribe (ʃ) 92
\Hslash (ʃ) 92
\hslash (ħ) 59
\Hsv (ʏ) 92
\HT (ɬ) 92
\HT (○) 81
\Ht (ɑ) 92
\Hten (∩) 92
\Hthousand (ɪ) 92
\Htongue (ʅ) 92
\HU (ʉ) 92
\Hu (ʉ) 92
Hungarian umlaut (◌̋) *see* accents
\Hut (⌂) 102
\HV (ʋ) 92
\Hv (ʋ) 92
\hv (ɦʋ) 14
\Hvbar (ʉ) 92
\HW (ɷ) 92
\Hw (ɯ) 92
\HX (ɤ) 92
\Hx (ɦ) 92
\HXthousand (ɦ) 92
\HY (ɣ) 92
\Hy (ɣ) 92
hyphen, discretionary 126
\HZ (ʐ) 92
\Hz (ʒ) 92

I

ï 16
\i (ı) 16
\ialign 115, 117, 118
\ibar (ɨ) 15
IBM PC 81, 107, 125
Icelandic staves 107
\IceMountain (🏔) 102
\iddots (⋰) 71
\iddots () 117
\idotsint (∫ ⋯ ∫) 29
\idotsint (∫⋯∫) 31
\idotsint (∫⋯∫) 32
\iff . *see* \Longleftrightarrow
ifsym (package) 78, 89, 101, 102, 111, 113, 130, 131
igo (package) 105, 130
\igocircle (◉) 105
\igocircle (◎) 105
\igocross (⊗) 105
\igocross (⊗) 105
\igonone (●) 105
\igonone (○) 105
\igosquare (▣) 105
\igosquare (▣) 105
\igotriangle (▲) 105
\igotriangle (△) 105
\iiiint (∫∫∫∫) 29
\iiiint (⨌) 31
\iiiint (⨌) 32
\iiiint (⨌) 32
\iiint (∭) 30
\iiint (∫∫∫) 29
\iiint (∭) 29, 31

\iiint (∭) 32
\iiint (⨌) 32
\iint (∬) 30
\iint (⨍) 29
\iint (∬) 29, 31
\iint (∬) 32
\iint (∬) 32
\iint (∬) 32
\Im (ℑ) 59
\im (j) 59
\imath (ı) 59, 65
\impliedby . *see* \Longleftarrow
\implies . *see* \Longrightarrow *and* \vdash
impulse train . . . . . *see* sha
\in (∈) 59
\in (∈) 59
\in (∈) 60
\in (∈) 59
inches . . . . . *see* \second *and* \textquotedbl
\incoh (≍) 40
independence
  probabilistic 116
  statistical 116
  stochastic . . . . . *see* \bot
\independent (⫫) 116
\Industry (🏭) 100
inequalities 10, 42–45
inexact differential . . . *see* \dbar
\inf (inf) 56
infimum . . *see* \inf and \sqcap
infinity (∞) . . . . . *see* \infty
\Info (🛈) 109
\Info (🛈) 100
information symbols 100
informator symbols 104
\infty (∞) 73
\infty (∞) 73
\infty (∞) 74
\inipartvoice (◌̓) 18
\inipartvoiceless (◌̥) 18
\injlim (inj lim) 56
\inplus (⟌) 34
inputenc (package) 128
\Ins (Ins) 80
\int (∫) 30
\int (∫) 29
\int (∫) 29
\int (∫) 32
\intclockwise (∱) 33
\INTEGER (𝐙) 56
\Integer (ℤ) 56
integers (ℤ) . *see* alphabets, math
integrals 29–33, 74, 116
integrals (wasysym package option) 29
\intercal (⊺) 24
\intercal (⊺) 59
\interleave (⫴) 25
intersection . . . . . *see* \cap
\Interval (◔) 102
\inva (ɐ) 14
\invamp (⅋) 25
\invbackneg (⌐) 74
\INVd ( ) 81
\invdiameter (⌀) 98
\inve (ə) 14
inverse limit . . *see* \varprojlim
\InversTransformHoriz (⊷) 40
\InversTransformVert (⥯) . . 40
inverted symbols . 12–15, 19, 113
inverters 81
\invf (ʇ) 14
\invglotstop (ɔ) 14
\invh (ɥ) 14
\INVl ( ) 81
\invlegr (ɹ) 14
\invm (ɯ) 14
\invneg (⌐) 35
\invneg (⌐) 74
\INVr ( ) 81
\invr (ɹ) 14
\invscr (ʁ) 14
\invscripta (ɒ) 14
\INVu ( ) 81
\invv (ʌ) 14
\invw (ʍ) 14
\invy (ʎ) 14
\iota (ι) 57
iota, upside-down 113
\iotaup (ɩ) 57
\ipagamma (ɣ) 14
\ipercatal (⁺) 106
\IroningI (🏧) 100
\IroningII (🏧) 100
\IroningIII (🏧) 100
irony mark (؟) 113
irrational numbers (𝕀) . . . . . *see* alphabets, math
\Irritant (✕) 102
\ismodeledby (⥋) 114
ISO character entities 126
isoent (package) 126

J

\j (ȷ) 16
\JackStar (✣) 87
\JackStarBold (✤) 87
Jewish star 87
\jmath (ȷ) 59, 65
\Joch (ȷ̌) 102
\Join (⋈) 34, 35
\Join (⋈) 27
\joinrel 113
joint denial . . . . *see* \downarrow
junicode (package) 129
Junicode-Regular.ttf (file) 129
\Jupiter (♃) 79
\Jupiter (♃) 79
\jupiter (♃) 79

K

\k (◌̨) 19
\k (◌̨) 16
\kappa (κ) 57
\kappaup (κ) 57
\ker (ker) 56
ket 61
\Keyboard (⌨) 80
keyboard symbols 80
keys, computer 80
keystroke (package) . 80, 130, 131
\keystroke (⌨) 80
king 104
knight 104
Knuth, Donald E. . . 9, 124, 133
  symbols by 99, 100
\Koppa (Ϙ) 97
\koppa (ϙ) 97
\Kr (◌⃝) 99
\kreuz (✠) 98
Kronecker product . . *see* \otimes
Kronecker sum . . . . *see* \oplus
kroužek (◌̊) . . . . . *see* accents
\kside (≫) 104
\Kutline (┈) 84

L

\L (Ł) 11
\l (ł) 11
\labdentalnas (ɳ) 14
\labvel 18
\Ladiesroom (🚺) 100
Lagrangian ($\mathscr{L}$) . . *see* alphabets, math
\Lambda (Λ) 57
\lambda (λ) 57
\lambdabar (ƛ) 73
\lambdaslash (ƛ) 73
\lambdaup (λ) 57
Lamport, Leslie 129, 133
\land . . . . . *see* \wedge
\landdownint (⨏) 32
\landdownint (⨏) 32
\landupint (⨎) 32
\landupint (⨎) 32
\Langle (⪡) 76
\lAngle (⟪) 64

\langle (⟨) 23, 61
\langle ( ) 62
\langlebar ( ) 62
\Laplace (•—○) 40
\laplace (○—•) 40
Laplace transform ($\mathscr{L}$) . . . . . *see* alphabets, math
Laplacian (Δ) . . . . . *see* \Delta
Laplacian (∇^2) . . . . *see* \nabla
\largecircle (◯) 88
\largediamond (◇) 88
\largelozenge (◊) 88
\largepencil ( ) 85
\largepentagram (☆) 88
\largesquare (□) 88
\largestar (☆) 88
\largestarofdavid (✡) 88
\largetriangledown (▽) . . . 47
\largetriangleleft (◁) . . . 47
\largetriangleright (▷) . . 47
\largetriangleup (△) 47
\LArrow ( ) 80
\larrowfill 69
\Laserbeam (✷—) 82
LaTeX 1, 9, 16, 29, 34, 56, 61, 70, 73, 81, 84, 110, 113–120, 123, 125, 126, 128–130, 132, 133
LaTeX 2$_\varepsilon$ 1, 9, 10, 21, 22, 24, 34, 41, 47, 66, 70, 73, 77, 81, 110, 111, 113, 116, 117, 122–128, 133
latexsym (package) 24, 34, 41, 47, 73, 110, 130
\latfric (ɬ) 14
Latin 1 . . . . . 9, 125–126, 130
table 127
laundry symbols 100
\Lbag (⟅) 60
\lbag (⟅) 60
\lbrace ( ) 62
\Lbrack (⟦) 76
\lBrack (⟦) 64
LCD digits 78
\lCeil (⌈) 64
\lceil (⌈) 61
\lceil ( ) 62
\lcirclearrowdown (◌) 50
\lcirclearrowleft (◌) 50
\lcirclearrowright (◌) . . . 50
\lcirclearrowup (◌) 50
\lcircleleftint (∱) 32
\lcirclerightint (∱) 32
\lcm (lcm) 123
\lcorners (⌞) 60
\lcurvearrowdown (⤵) 50
\lcurvearrowleft (↶) 50
\lcurvearrowne (↷) 50
\lcurvearrownw (↖) 50
\lcurvearrowright (↝) 50
\lcurvearrowse (↘) 50
\lcurvearrowsw (↙) 50
\lcurvearrowup (↰) 50
\ldbrack (⟦) 62
\ldotp (.) 70
\ldots (. . .) 70
\le . . . . . *see* \leq
\leadsto (⇝) 35, 47
\leadsto (⇝) 51
leaf . . . . . *see* \textleaf
\leafleft (◒) 88
\leafNE (◪) 88
\leafright (◓) 88
leaves 88, 90
Lefschetz motive ($\mathscr{L}$) . . . . . *see* alphabets, math
\Left 106
\left 61, 63, 64, 110, 112
\LEFTarrow (◀) 98
\Leftarrow (⇐) 23, 47
\Leftarrow (⇐) 50
\leftarrow (←) 49
\leftarrow (←) 47
\leftarrow (←) 50
\leftarrowtail (↢) 48
\leftarrowtail (↢) 50
\leftarrowtriangle (⇽) . . . 48
\leftbarharpoon (⥢) 49
\LEFTCIRCLE (◖) 98
\LEFTcircle (◐) 98
\Leftcircle (◖) 98
\leftevaw ( ) 63
\leftfilledspoon (⊷) 54
\leftfootline (⊢) 37
\leftfree (⊢) 37
\lefthalfcap (⌐) 26
\lefthalfcup (⌙) 26
\lefthand (☜) 85
\leftharpoonccw (↼) 53
\leftharpooncw (↼) 53
\leftharpoondown (⇃) 49
\leftharpoondown (⇃) 48
\leftharpoonup (↼) 49
\leftharpoonup (↼) 48
\leftleftarrows (⇇) 49
\leftleftarrows (⇇) 48
\leftleftarrows (⇇) 50
\leftleftharpoons (⥎) 49
\leftlsquigarrow (↜) 50
\leftmapsto (↤) 50
\leftModels (⫤) 37
\leftmodels (⫤) 37
\leftmoon (☾) 79
\leftmoon (☾) 79
\leftp (˹) 20
\leftpitchfork (⋔) 54
\leftpointright (☞) 85
\leftpropto (∝) 37
\Leftrightarrow (⇔) 47
\Leftrightarrow (⇔) 50
\leftrightarrow (↔) 49
\leftrightarrow (↔) 47
\leftrightarrow (↔) 50
\leftrightarroweq (⇿) 48
\leftrightarrows (⇆) 49
\leftrightarrows (⇆) 48
\leftrightarrows (⇆) 50
\leftrightarrowtriangle (⇹) 48
\leftrightharpoon (⇁) 49
\leftrightharpoondownup (⥊) 53
\leftrightharpoons (⥋) . . . 49
\leftrightharpoons (⥋) . . . 48
\leftrightharpoons (⇋) 53
\leftrightharpoonsfill 69
\leftrightharpoonupdown (⥊) 53
\Leftrightline (═) 37
\leftrightline (—) 37
\leftrightsquigarrow (⇜⇝) 49
\leftrightsquigarrow (⇜⇝) . 48
\leftrightsquigarrow (↭) . . 51
\leftrsquigarrow (⇜) 50
\Leftscissors (⥸) 84
\leftslice (◅) 25
\leftslice (◅) 37
\leftspoon (⟜) 54
\leftsquigarrow (⇜) 49
\leftsquigarrow (⇜) 49
\leftt (⊣) 20
\leftthere fore (∵) 26, 71
\leftthreetimes (⋋) 73
\leftthreetimes (⋋) 24
\leftthreetimes (⋋) 26
\leftthumbsdown ( ) 85
\leftthumbsup ( ) 85
\lefttorightarrow (⮌) 49
\Lefttorque (ʅ) 82
\leftturn (↺) 98
\leftVdash (⫣) 37
\leftvdash (⊣) 37
\leftwave ( ) 63
\leftY (ʏ) 26
legal symbols 10, 21, 127
\legm (ɯ) 14
\legr (ɾ) 14
\length (ː) 20
\Leo (♌) 79

\leo (⋌) 79
\leq (⩽) 44
\leq (≤) 42, 44
\leq (≤) 45
\leqclosed (⧀) 45, 47
\leqdot (⩿) 45
\leqq (≦) 44
\leqq (≦) 43
\leqq (≦) 45
\leqslant (⩽) 43
\leqslant (⩽) 45
\leqslantdot (⩿) 45
\less (<) 45
less-than signs . . *see* inequalities
\lessapprox (⪅) 44
\lessapprox (≲) 43
\lessapprox (≲) 45
\lessclosed (⧏) 45, 47
\lessdot (⋖) 44
\lessdot (⋖) 43
\lessdot (⋖) 45
\lesseqgtr (⋚) 44
\lesseqgtr (⋚) 43
\lesseqgtr (⋚) 45
\lesseqgtrslant (⋚) 45
\lesseqqgtr (⪋) 44
\lesseqqgtr (⪋) 43
\lesseqqgtr (⪋) 45
\lessgtr (≶) 44
\lessgtr (≶) 43
\lessgtr (≶) 45
\lessneqqgtr (≨) 45
\lesssim (≲) 44
\lesssim (≲) 43
\lesssim (≲) 45
\Letter (⌧) 102
\Letter (✉ vs. ⌧) 111
\Letter (✉) 82
letter-like symbols 59, 60
letters . . . . . *see* alphabets
barred 114
non-ASCII 11
slashed 115
variant Latin 58
\levaw ( ) 63
\LF (◙) 81
\lfilet ( ) 62
\lFloor ( ) 64
\lfloor ( ) 61
\lfloor ( ) 62
\lg (lg) 56
\lgroup ( ) 61
\lgroup ( ) 62
\LHD (◀) 25
\lhd (◁) 24, 25
\lhd (◁) 45, 47
\lhdbend ( ) 99
\lhookdownarrow (↓) 50
\lhookleftarrow (↩) 51
\lhooknearrow (↗) 51
\lhooknwarrow (↖) 51
\lhookrightarrow (↪) 51
\lhooksearrow (↘) 51
\lhookswarrow (↙) 51
\lhookuparrow (↑) 51
\Libra (♎) 79
\libra (♎) 79
Lie derivative (ℒ) *see* alphabets, math
life-insurance symbols 118
\lightbulb (💡) 122
lightbulb.mf (file) . . . 120, 121
lightbulb.sty (file) . . 122, 123
lightbulb10.2602gf (file) . . 120
lightbulb10.dvi (file) 120
lightbulb10.mf (file) . . 120–122
lightbulb10.tfm (file) 122
\Lightning (🗲 vs. 🗲) 111
\Lightning (🗲) 101
\Lightning (🗲) 82
\lightning (🗲) 48
\lightning (🗲 vs. 🗲) 111
\lightning (🗲) 51
\lightning (🗲) 98
\lim (lim) 56, 123
\liminf (lim inf) 56, 123
limits 56
\limsup (lim sup) 56, 123
\linbfamily 95, 96
Linear A 92
Linear B 95, 96
linear implication *see* \multimap
linear logic symbols 23–25, 28, 29, 32–33, 40, 59
linearA (package) . . . 92, 130, 131
\LinearAC (𐘀) 92
\LinearACC (𐘁) 92
\LinearACCC (𐘂) 92
\LinearACCCI (𐘃) 92
\LinearACCCII (𐘄) 92
\LinearACCCIII (𐘅) 92
\LinearACCCIV (𐘆) 93
\LinearACCCIX (𐘇) 93
\LinearACCCL (𐘈) 93
\LinearACCCLI (𐘉) 93
\LinearACCCLII (𐘊) 93
\LinearACCCLIII (𐘋) 94
\LinearACCCLIV (𐘌) 94
\LinearACCCLIX (𐘍) 94
\LinearACCCLV (𐘎) 94
\LinearACCCLVI (𐘏) 94
\LinearACCCLVII (𐘐) 94
\LinearACCCLVIII (𐘑) 94
\LinearACCCLX (𐘒) 94
\LinearACCCLXI (𐘓) 94
\LinearACCCLXII (𐘔) 94
\LinearACCCLXIII (𐘕) 94
\LinearACCCLXIV (𐘖) 94
\LinearACCCLXIX (𐘗) 94
\LinearACCCLXV (𐘘) 94
\LinearACCCLXVI (𐘙) 94
\LinearACCCLXVII (𐘚) 94
\LinearACCCLXVIII (𐘛) 94
\LinearACCCLXX (𐘜) 94
\LinearACCCLXXI (𐘝) 94
\LinearACCCLXXII (𐘞) 94
\LinearACCCLXXIII (𐘟) 94
\LinearACCCLXXIV (𐘠) 94
\LinearACCCLXXIX (𐘡) 94
\LinearACCCLXXV (𐘢) 94
\LinearACCCLXXVI (𐘣) 94
\LinearACCCLXXVII (𐘤) 94
\LinearACCCLXXVIII (𐘥) 94
\LinearACCCLXXX (𐘦) 94
\LinearACCCLXXXI (𐘧) 94
\LinearACCCLXXXII (𐘨) 94
\LinearACCCLXXXIII (𐘩) 94
\LinearACCCLXXXIV (𐘪) 94
\LinearACCCLXXXIX (𐘫) 94
\LinearACCCLXXXV (𐘬) 94
\LinearACCCLXXXVI (𐘭) 94
\LinearACCCLXXXVII (𐘮) 94
\LinearACCCLXXXVIII (𐘯) . . . 94
\LinearACCCV (𐘰) 93
\LinearACCCVI (𐘱) 93
\LinearACCCVII (𐘲) 93
\LinearACCCVIII (𐘳) 93
\LinearACCCX (𐘴) 93
\LinearACCCXI (𐘵) 93
\LinearACCCXII (𐘶) 93
\LinearACCCXIII (𐘷) 93
\LinearACCCXIV (𐘸) 93
\LinearACCCXIX (𐘹) 93
\LinearACCCXL (𐘺) 93
\LinearACCCXLI (𐘻) 93
\LinearACCCXLII (𐘼) 93
\LinearACCCXLIII (𐘽) 93
\LinearACCCXLIV (𐘾) 93
\LinearACCCXLIX (𐘿) 93
\LinearACCCXLV (𐙀) 93
\LinearACCCXLVI (𐙁) 93
\LinearACCCXLVII (𐙂) 93
\LinearACCCXLVIII (𐙃) 93
\LinearACCCXV (𐙄) 93
\LinearACCCXVI (𐙅) 93
\LinearACCCXVII (𐙆) 93
\LinearACCCXVIII (𐙇) 93
\LinearACCCXX (𐙈) 93

\LinearACCCXXI (𐘡) 93
\LinearACCCXXII (𐘢) 93
\LinearACCCXXIII (𐘣) 93
\LinearACCCXXIV (𐘤) 93
\LinearACCCXXIX (𐘩) 93
\LinearACCCXXV (𐘥) 93
\LinearACCCXXVI (𐘦) 93
\LinearACCCXXVII (𐘧) 93
\LinearACCCXXVIII (𐘨) 93
\LinearACCCXXX (𐘪) 93
\LinearACCCXXXI (𐘫) 93
\LinearACCCXXXII (𐘬) 93
\LinearACCCXXXIII (𐘭) 93
\LinearACCCXXXIV (𐘮) 93
\LinearACCCXXXIX (𐘲) 93
\LinearACCCXXXV (𐘯) 93
\LinearACCCXXXVI (𐘰) 93
\LinearACCCXXXVII (𐘱) 93
\LinearACCCXXXVIII (𐘳) 93
\LinearACCI (𐙁) 92
\LinearACCII (𐙂) 92
\LinearACCIII (𐙃) 92
\LinearACCIV (𐙄) 92
\LinearACCIX (𐙉) 93
\LinearACCL (𐙊) 93
\LinearACCLI (𐙋) 93
\LinearACCLII (𐙌) 93
\LinearACCLIII (𐙍) 93
\LinearACCLIV (𐙎) 93
\LinearACCLIX (𐙓) 94
\LinearACCLV (𐙏) 94
\LinearACCLVI (𐙐) 94
\LinearACCLVII (𐙑) 94
\LinearACCLVIII (𐙒) 94
\LinearACCLX (𐙔) 94
\LinearACCLXI (𐙕) 94
\LinearACCLXII (𐙖) 94
\LinearACCLXIII (𐙗) 94
\LinearACCLXIV (𐙘) 94
\LinearACCLXIX (𐙝) 94
\LinearACCLXV (𐙙) 94
\LinearACCLXVI (𐙚) 94
\LinearACCLXVII (𐙛) 94
\LinearACCLXVIII (𐙜) 94
\LinearACCLXX (𐙞) 94
\LinearACCLXXI (𐙟) 94
\LinearACCLXXII (𐙠) 94
\LinearACCLXXIII (𐙡) 94
\LinearACCLXXIV (𐙢) 94
\LinearACCLXXIX (𐙧) 94
\LinearACCLXXV (𐙣) 94
\LinearACCLXXVI (𐙤) 94
\LinearACCLXXVII (𐙥) 94
\LinearACCLXXVIII (𐙦) 94
\LinearACCLXXX (𐙨) 94
\LinearACCLXXXI (𐙩) 94
\LinearACCLXXXII (𐙪) 94
\LinearACCLXXXIII (𐙫) 94
\LinearACCLXXXIV (𐙬) 94
\LinearACCLXXXIX (𐙱) 94
\LinearACCLXXXV (𐙭) 94
\LinearACCLXXXVI (𐙮) 94
\LinearACCLXXXVII (𐙯) 94
\LinearACCLXXXVIII (𐙰) 94
\LinearACCLXXXX (𐙲) 94
\LinearACCV (𐙅) 92
\LinearACCVI (𐙆) 93
\LinearACCVII (𐙇) 93
\LinearACCVIII (𐙈) 93
\LinearACCX (𐙊) 93
\LinearACCXCI (𐙶) 94
\LinearACCXCII (𐙷) 94
\LinearACCXCIII (𐙸) 94
\LinearACCXCIV (𐙹) 94
\LinearACCXCIX (𐙾) 92
\LinearACCXCV (𐙻) 92
\LinearACCXCVI (𐙼) 92
\LinearACCXCVII (𐙽) 92
\LinearACCXCVIII (𐙾) 92
\LinearACCXI (𐙋) 93
\LinearACCXII (𐙌) 93
\LinearACCXIII (𐙍) 93
\LinearACCXIV (𐙎) 93
\LinearACCXIX (𐙓) 93
\LinearACCXL (𐙔) 93
\LinearACCXLI (𐙕) 93
\LinearACCXLII (𐙖) 93
\LinearACCXLIII (𐙗) 93
\LinearACCXLIV (𐙘) 93
\LinearACCXLIX (𐙝) 93
\LinearACCXLV (𐙙) 93
\LinearACCXLVI (𐙚) 93
\LinearACCXLVII (𐙛) 93
\LinearACCXLVIII (𐙜) 93
\LinearACCXV (𐙏) 93
\LinearACCXVI (𐙐) 93
\LinearACCXVII (𐙑) 93
\LinearACCXVIII (𐙒) 93
\LinearACCXX (𐙔) 93
\LinearACCXXI (𐙕) 93
\LinearACCXXII (𐙖) 93
\LinearACCXXIII (𐙗) 93
\LinearACCXXIV (𐙘) 93
\LinearACCXXIX (𐙝) 93
\LinearACCXXV (𐙙) 93
\LinearACCXXVI (𐙚) 93
\LinearACCXXVII (𐙛) 93
\LinearACCXXVIII (𐙜) 93
\LinearACCXXX (𐙞) 93
\LinearACCXXXI (𐙟) 93
\LinearACCXXXII (𐙠) 93
\LinearACCXXXIII (𐙡) 93
\LinearACCXXXIV (𐙢) 93
\LinearACCXXXIX (𐙧) 93
\LinearACCXXXV (𐙣) 93
\LinearACCXXXVI (𐙤) 93
\LinearACCXXXVII (𐙥) 93
\LinearACCXXXVIII (𐙦) 93
\LinearACI (𐙀) 92
\LinearACII (𐙁) 92
\LinearACIII (𐙂) 92
\LinearACIV (𐙃) 92
\LinearACIX (𐙇) 93
\LinearACL (𐙈) 93
\LinearACLI (𐙉) 93
\LinearACLII (𐙊) 93
\LinearACLIII (𐙋) 93
\LinearACLIV (𐙌) 93
\LinearACLIX (𐙑) 94
\LinearACLV (𐙍) 93
\LinearACLVI (𐙎) 93
\LinearACLVII (𐙏) 94
\LinearACLVIII (𐙐) 94
\LinearACLX (𐙔) 94
\LinearACLXI (𐙕) 94
\LinearACLXII (𐙖) 94
\LinearACLXIII (𐙗) 94
\LinearACLXIV (𐙘) 94
\LinearACLXIX (𐙝) 94
\LinearACLXV (𐙙) 94
\LinearACLXVI (𐙚) 94
\LinearACLXVII (𐙛) 94
\LinearACLXVIII (𐙜) 94
\LinearACLXX (𐙞) 94
\LinearACLXXI (𐙟) 94
\LinearACLXXII (𐙠) 94
\LinearACLXXIII (𐙡) 94
\LinearACLXXIV (𐙢) 94
\LinearACLXXIX (𐙧) 94
\LinearACLXXV (𐙣) 94
\LinearACLXXVI (𐙤) 94
\LinearACLXXVII (𐙥) 94
\LinearACLXXVIII (𐙦) 94
\LinearACLXXX (𐙨) 94
\LinearACLXXXI (𐙩) 94
\LinearACLXXXII (𐙪) 94
\LinearACLXXXIII (𐙫) 94
\LinearACLXXXIV (𐙬) 94
\LinearACLXXXIX (𐙱) 94
\LinearACLXXXV (𐙭) 94
\LinearACLXXXVI (𐙮) 94
\LinearACLXXXVII (𐙯) 94
\LinearACLXXXVIII (𐙰) 94
\LinearACLXXXX (𐙲) 94
\LinearACV (𐙅) 92
\LinearACVI (𐙆) 92
\LinearACVII (𐙇) 92
\LinearACVIII (𐙈) 93
\LinearACX (𐙊) 93
\LinearACXCI (𐙶) 94
\LinearACXCII (𐙷) 94
\LinearACXCIII (𐙸) 94
\LinearACXCIV (𐙹) 94
\LinearACXCIX (𐙾) 92
\LinearACXCV (𐙻) 94

\LinearACXCVI (𐘦) 94
\LinearACXCVII (𐘧) 92
\LinearACXCVIII (𐘨) 92
\LinearACXI (𐘩) 93
\LinearACXII (𐘪) 93
\LinearACXIII (𐘫) 93
\LinearACXIV (𐘬) 93
\LinearACXIX (𐘭) 93
\LinearACXL (𐘮) 93
\LinearACXLI (𐘯) 93
\LinearACXLII (𐘰) 93
\LinearACXLIII (𐘱) 93
\LinearACXLIV (𐘲) 93
\LinearACXLIX (𐘳) 93
\LinearACXLV (𐘴) 93
\LinearACXLVI (𐘵) 93
\LinearACXLVII (𐘶) 93
\LinearACXLVIII (𐘷) 93
\LinearACXV (𐘸) 93
\LinearACXVI (𐘹) 93
\LinearACXVII (𐘺) 93
\LinearACXVIII (𐘻) 93
\LinearACXX (𐘼) 93
\LinearACXXI (𐘽) 93
\LinearACXXII (𐘾) 93
\LinearACXXIII (𐘿) 93
\LinearACXXIV (𐙀) 93
\LinearACXXIX (𐙁) 93
\LinearACXXV (𐙂) 93
\LinearACXXVI (𐙃) 93
\LinearACXXVII (𐙄) 93
\LinearACXXVIII (𐙅) 93
\LinearACXXX (𐙆) 93
\LinearACXXXI (𐙇) 93
\LinearACXXXII (𐙈) 93
\LinearACXXXIII (𐙉) 93
\LinearACXXXIV (𐙊) 93
\LinearACXXXIX (𐙋) 93
\LinearACXXXV (𐙌) 93
\LinearACXXXVI (𐙍) 93
\LinearACXXXVII (𐙎) 93
\LinearACXXXVIII (𐙏) 93
\LinearAI (𐘀) 92
\LinearAII (𐘁) 92
\LinearAIII (𐘂) 92
\LinearAIV (𐘃) 92
\LinearAIX (𐘄) 92
\LinearAL (𐘅) 93
\LinearALI (𐘆) 93
\LinearALII (𐘇) 93
\LinearALIII (𐘈) 93
\LinearALIV (𐘉) 93
\LinearALIX (𐘊) 94
\LinearALV (𐘋) 93
\LinearALVI (𐘌) 93
\LinearALVII (𐘍) 93
\LinearALVIII (𐘎) 93
\LinearALX (𐘏) 94
\LinearALXI (𐘐) 94
\LinearALXII (𐘑) 94
\LinearALXIII (𐘒) 94
\LinearALXIV (𐘓) 94
\LinearALXIX (𐘔) 94
\LinearALXV (𐘕) 94
\LinearALXVI (𐘖) 94
\LinearALXVII (𐘗) 94
\LinearALXVIII (𐘘) 94
\LinearALXX (𐘙) 94
\LinearALXXI (𐘚) 94
\LinearALXXII (𐘛) 94
\LinearALXXIII (𐘜) 94
\LinearALXXIV (𐘝) 94
\LinearALXXIX (𐘞) 94
\LinearALXXV (𐘟) 94
\LinearALXXVI (𐘠) 94
\LinearALXXVII (𐘡) 94
\LinearALXXVIII (𐘢) 94
\LinearALXXX (𐘣) 94
\LinearAV (𐘤) 92
\LinearAVI (𐘥) 92
\LinearAVII (𐘦) 92
\LinearAVIII (𐘧) 92
\LinearAX (𐘨) 93
\LinearAXCI (𐘩) 94
\LinearAXCII (𐘪) 94
\LinearAXCIII (𐘫) 94
\LinearAXCIV (𐘬) 94
\LinearAXCIX (𐘭) 92
\LinearAXCV (𐘮) 94
\LinearAXCVI (𐘯) 94
\LinearAXCVII (𐘰) 94
\LinearAXCVIII (𐘱) 94
\LinearAXI (𐘲) 93
\LinearAXII (𐘳) 93
\LinearAXIII (𐘴) 93
\LinearAXIV (𐘵) 93
\LinearAXIX (𐘶) 93
\LinearAXL (𐘷) 93
\LinearAXLI (𐘸) 93
\LinearAXLII (𐘹) 93
\LinearAXLIII (𐘺) 93
\LinearAXLIV (𐘻) 93
\LinearAXLIX (𐘼) 93
\LinearAXLV (𐘽) 93
\LinearAXLVI (𐘾) 93
\LinearAXLVII (𐘿) 93
\LinearAXLVIII (𐙀) 93
\LinearAXV (𐙁) 93
\LinearAXVI (𐙂) 93
\LinearAXVII (𐙃) 93
\LinearAXVIII (𐙄) 93
\LinearAXX (𐙅) 93
\LinearAXXI (𐙆) 93
\LinearAXXII (𐙇) 93
\LinearAXXIII (𐙈) 93
\LinearAXXIV (𐙉) 93
\LinearAXXIX (𐙊) 93
\LinearAXXV (𐙋) 93
\LinearAXXVI (𐙌) 93
\LinearAXXVII (𐙍) 93
\LinearAXXVIII (𐙎) 93
linearb (package) 95, 96, 130, 131
\Lineload (𝍐) 82
linguistic symbols 12–15

\Lisa ( ) 106
\lJoin (⋉) 35
\ll (≪) 44
\ll (⋘) 42
\ll (≪) 45

\llangle ( ) 62
\llap 117
\llbracket (⟦) 62

\llbracket ( ) 64
\llceil (⌈) 60
\llcorner (⌞) 60
\llcorner (⌊) 60

\llcorner ( ) 62
\llcurly (⪻) 36
\Lleftarrow (⇚) 48
\Lleftarrow (⇚) 51
\llfloor (⌊) 60
\lll (⪻) 44
\lll (⋘) 43
\lll (⋘ vs. ⪻) 111

\lll (⋘) 45
\llless . . . . . *see* \lll
\llless (⋘) 45
\llparenthesis (⦇) 60
\lmoustache ( ) 61
\lmoustache ( ) 62
\ln (ln) 56
\lnapprox (⪉) 44
\lnapprox (⋦) 43
\lnapprox (⪉) 45
\lneq (⪇) 44
\lneq (≨) 43
\lneqq (≨) 44
\lneqq (≨) 43
\lneqq (≨) 45
\lnot . . . . . *see* \neg
\lnot (¬) 74
\lnsim (⋦) 44
\lnsim (⋦) 43
\lnsim (⋦) 45
local ring (𝒪) *see* alphabets, math
\log (log) 56, 123
log-like symbols 56, 123
logic gates 81
logical operators
and . . . . . *see* \wedge
not . . . . *see* \neg *and* \sim
or . . . . . *see* \vee
\logof (⊛) 35
lollipop . . . . . *see* \multimap
long division 66
\longa (⎯) 106
\longcastling (O-O-O) . . . 104
longdiv (package) 66
\Longleftarrow (⟸) 47
\Longleftarrow (⟸) 50
\longleftarrow (⟵) 50
\longleftarrow (⟵) 47
\Longleftrightarrow (⟺) . 47
\Longleftrightarrow (⟺) . 50
\longleftrightarrow (⟷) . . 50
\longleftrightarrow (⟷) . 47
\Longmapsfrom (⟽) 48
\longmapsfrom (⟻) 48
\Longmapsto (⟾) 48
\longmapsto (⟼) 50
\longmapsto (⟼) 47
\LongPulseHigh (⎍) 78
\LongPulseLow (⎍) 78
\Longrightarrow (⟹) 47
\Longrightarrow (⟹) 50
\longrightarrow (⟶) 50
\longrightarrow (⟶) 47
\looparrowdownleft (↫) . . . 49
\looparrowdownright (↬) . . . 49
\looparrowleft (↫) 49
\looparrowleft (↫) 48
\looparrowleft (↫) 50
\looparrowright (↬) 49
\looparrowright (↬) 48
\looparrowright (↬) 50
\Loosebearing (≙) 82
\lor . . . . . *see* \vee
\LowerDiamond (⬙) 89
lowering . . . *see* \textlowering
\lozenge (◊) 73
\lozenge (◊) 88
\Lparen (⦇) 76
\lrcorner (⌟) 60
\lrcorner (⌟) 60
\lrcorner ( ) 62
\lrJoin . . . . . *see* \Join
\lrtimes (⋈) 35
\lsem ( ) 62
\lsemantic . . . . . *see* \ldbrack
\Lsh (↰) 49
\Lsh (↰) 48
\Lsh (↰) 50
\Lsteel (⅃) 82
\ltimes (⋉) 26
\ltimes (⋉) 24
\ltimes (⋉) 26
\ltriple 64
Luecking, Dan 116
\lVert (‖) 61
\lVert (‖) 64
\lvert (|) 61
\lvertneqq (≨) 44
\lvertneqq (≨) 43
\lvertneqq (≨) 45
\lwave ( ) 63
\lWavy ( ) 62
\lwavy ( ) 62
\lz (ɮ) 14

M

\M 11
\M (𝐴) 105
\m 11
\m (⎯) 105
\ma (𝑎) 105
\macron (¯) 18
macron (¯) . . . . . *see* accents
\Maggie ( ) 106
magical signs 107
majuscules 57
\makeatletter 117
\makeatother 117
\MALE (♂) 82
\Male (⚦) 82
male 79, 82
\male (♂) 82
\MaleMale (⚣) 82
\maltese (✠) 11
\maltese (✠) 74
man 91, 101
\manboldkidney (⚆) 100
\manconcentriccircles (⚇) 100
\manconcentricdiamond (⚈) 100
\mancone (⚇) 100
\mancube (⚅) 100
\manerrarrow (⚝) 100
\manfilledquartercircle (◣) 100
manfnt (package) . . . 99, 100, 130
\manhpennib (▂) 100
\manimpossiblecube (⚅) . . . 100
\mankidney (⚆) 100
\manlhpenkidney (⚆) 100
\manpenkidney (⚆) 100
\manquadrifolium (☘) 100
\manquartercircle (◝) 100
\manrotatedquadrifolium (☘) 100
\manrotatedquartercircle (◜) 100
\manstar (☆) 100
\mantiltpennib (◢) 100
\mantriangledown (▼) 100
\mantriangleright (▶) 100
\mantriangleup (▲) 100
\manvpennib (▮) 100
\Mappedfromchar (↤) 55
\mappedfromchar (↤) 55
\Mapsfrom (⇤) 48
\mapsfrom (↤) 48
\Mapsfromchar (↤) 56
\Mapsfromchar (↤) 55
\mapsfromchar (↤) 56
\mapsfromchar (↤) 55
\Mapsto (⇨) 48
\mapsto (↦) 47
\mapsto (↦) 51
\Mapstochar (↦) 56
\Mapstochar (↦) 55
\mapstochar (↦) 56
\Marge ( ) 106
\markera (✕) 104
\markerb (○) 104
married . . . . . *see* \textmarried
\Mars (♂) 79
\Mars (⚦) 79
\mars (♂) 79
\MartinVogel (𝔐) 101

marvosym (package) 20, 72, 74, 79, 80, 82, 84, 100, 101, 111
masonic cipher 108
\mate (#) 104
material biconditional . . . . . see \leftrightarrow and \equiv
material conditional . . . . . see \rightarrow and \supset
material equivalence . . . . . see \leftrightarrow and \equiv
material implication . . . . . see \rightarrow and \supset
material nonimplication . . . . see \nrightarrow and \nsupset
math alphabets 76
mathabx (package) . . . 23, 26, 28, 30, 34, 36, 41, 42, 44, 46, 49, 56, 59–62, 65, 67, 72, 73, 79, 103, 110, 111, 130, 131, 134
\mathaccent 114
\mathbb 76
\mathbbm 76
\mathbbmss 76
\mathbbmtt 76
mathbbol (package) 76
\mathbf 124
\mathbin 123
\mathbold 124
mathcal (euscript package option) 76
\mathcal 76
\mathcent (¢) 59
\mathchoice 116
\mathclose 123
mathcomp (package) 72
mathdesign (package) . 20, 27, 33, 60, 63, 75, 130
\mathdollar ($) 23
mathdots (package) . . 65, 70, 71, 117, 130, 131
\mathds 76
\mathellipsis (...) 23
mathematical symbols . . . 23–77
\mathfrak 76
\mathit 76
\mathnormal 76
\mathop 123
\mathopen 123
\mathord 123
\mathpalette 116, 117
\mathparagraph (¶) 23
\mathpunct 123
\mathpzc 76
\mathrel 113, 123
\mathring (å) 65, 66
\mathrm 76
mathrsfs (package) 76, 130
mathscr (euscript package option) 76
\mathscr 76
\mathsection (§) 23
\mathsterling (£) 59
\mathsterling (£) 23
mathtools (package) 23, 39, 67, 69, 130, 131
\mathunderscore (_) 23
\max (max) 56
Maxwell-Stefan diffusion coefficient . . . . . see \DH
\maya 72
\Mb (ᵐb) 105
\mb (ᵐb) 105
\Mbb (ᵐ𝔹) 105
\mBb (ᵐ𝔹) 105
\mbB (ᵐ𝔹) 105
\mbb (ᵐ𝔹) 105
mbboard (package) 76, 130
\mbbx (ᵐ𝔹𝕏) 105
\mbox 116, 117
\measuredangle (⦟) 73
\measuredangle (∡) 73
\measuredangle (∢) 74
mechanical scaling 120, 122
\medbackslash (⧹) 26, 27
\medbullet (●) 25
\medcirc (○) 25
\medcircle (○) 26
\meddiamond (◇) 28
\medlozenge (◊) 88
\medslash (⟋) 26
\medsquare (□) 28
\medstar (☆) 28
\medstarofdavid (✡) 88
\medtriangledown (▽) . . 28, 47
\medtriangleleft (◁) . . 28, 47
\medtriangleright (▷) . . 28, 47
\medtriangleup (△) 28, 47
\medvert (∣) 26, 27
\medvertdot (∣·) 26
membership . . . . . see \in
\Mercury (☿) 79
\Mercury (☿) 79
\mercury (☿) 79
\merge (⩛) 25
METAFONT 77, 119–123
METAFONTbook symbols . . . 100
metre (package) 18, 65, 105, 130, 131
metre 105
metrical symbols 105, 106
\mho (℧) 73
micro . . . . . see \textmu
\micro (µ) 78
Microsoft® Windows® 126
\mid (∣) 34, 63
\middle 61
\midtilde (~) 20
MIL-STD-806 81
millesimal sign . . . . . see \textperthousand
milstd (package) 81, 130
\min (min) 56, 123
minim . . . . . see musical symbols
minus . . . . . see \textminus
\minus (−) 26
\minuscolon (−:) 41
\minuscoloncolon (−::) 41
\minusdot (∸) 27
\minushookdown (¬) 74
\minushookup (⌐) 74
\minuso (⊖) 25, 115
minutes, angular . . . see \prime
miscellaneous symbols 73–75, 90, 98–109
"Missing $ inserted" 23
\Mmappedfromchar (ᵐ) 55
\mmappedfromchar (ᵐ) 55
\Mmapstochar (ᵐ) 55
\mmapstochar (ᵐ) 55
MnSymbol (package) 23, 26–28, 32, 33, 36–38, 42, 45, 47, 50–55, 58, 59, 62, 65–67, 71, 74, 88, 130, 131
\Mobilefone (📱) 82
\mod 56
\models (⊨) 34, 113
\models (⊨) 37
moduli space see alphabets, math
monetary symbols . . . 20, 21, 76
monus . . . . . see \dotdiv
\moo (⫠) 25
\Moon (☾) 79
\Moon (☽) 79
\MoonPha 108
\morepawns (⩾) 104
\moreroom (⩾) 104
\Mountain (🏔) 102
mouse . . . . . see \ComputerMouse
\MoveDown (▼) 100
\moverlay 117
\MoveUp (▲) 100
\mp (∓) 24
\mp (∓) 27
\mu (μ) 57
\multimap (⊸) 34, 35
\multimap (⊸) 54
\multimapboth (⧟) 35
\multimapbothvert (⧳) 35
\multimapdot (⊸•) 35
\multimapdotboth (•⊸•) 35
\multimapdotbothA (○⊸•) 35
\multimapdotbothAvert (○⊸•) . . 35
\multimapdotbothB (•⊸○) 35

\multimapdotbothBvert (⧟) . . 35
\multimapdotbothvert (⧟) . . . 35
\multimapdotinv (⧟) 35
\multimapinv (⧟) 35
multiple accents per character 118
multiplicative disjunction . . . . *see* \bindnasrepma, \invamp, and \parr
\Mundus (🜨) 101
Museum of Icelandic Sorcery and Witchcraft 108
musical symbols 22, 73, 74, 98, 99
musixtex (package) 99
\muup (μ) 57
\MVAt (@) 101
\MVEight (8) 72
\MVFive (5) 72
\MVFour (4) 72
\MVNine (9) 72
\MVOne (1) 72
\MVRightarrow (➔) 101
\MVSeven (7) 72
\MVSix (6) 72
\MVThree (3) 72
\MVTwo (2) 72
\MVZero (0) 72

N

\nabla (∇) 73
\nabla (▽) 74
\NAK (§) 81
NAND gates 81
\NANDd ( ) 81
\NANDl ( ) 81
\NANDr ( ) 81
\NANDu ( ) 81
\napprox (≉) 36
\napprox (≉) 38
\napproxeq (≋) 35
\napproxeq (≋) 38
\nasymp (≭) 35
\nasymp (≭) 55
nath (package) 60, 64, 130
\NATURAL (ℕ) 56
\Natural (ℕ) 56
\natural (♮) 73, 98
\natural (♮) 74
natural numbers (ℕ) . . . . . *see* alphabets, math
navigation symbols 100
\nbackapprox (⪷) 38
\nbackapproxeq (⪸) 38
\nbackcong (≌) 38
\nbackeqsim (≋) 38
\nbacksim (∽) 35
\nbacksim (∽) 38
\nbacksimeq (⋍) 35
\nbacksimeq (⋍) 38
\nbacktriplesim (⋍) 38
\NBSP ( ) 81
\nBumpeq (≠) 35
\nBumpeq (≠) 38
\nbumpeq (≠) 35
\nbumpeq (≠) 38
\ncirceq (≗) 38
\ncirclearrowleft (Ⓒ) 53
\ncirclearrowright (Ⓒ) . . . 53
\nclosedequal (≐) 38
\ncong (≇) 36
\ncong (≇) 34
\ncong (≇) 38
\ncurlyeqprec (⋞) 36
\ncurlyeqprec (⋞) 38
\ncurlyeqsucc (⋟) 36
\ncurlyeqsucc (⋟) 38
\ncurvearrowdownup (⥥) 51
\ncurvearrowleft (↶) 53
\ncurvearrowleftright (↭) . 51
\ncurvearrownesw (⤪) 51
\ncurvearrownwse (⤩) 51
\ncurvearrowright (↷) 53
\ncurvearrowrightleft (↭) . 51
\ncurvearrowsenw (⤪) 51
\ncurvearrowswne (⤪) 51
\ncurvearrowupdown (⥮) 51
\ndasharrow (⇢) 53
\ndasheddownarrow (⇣) 51
\ndashedleftarrow (⇠) 51
\ndashednearrow (⇗) 51
\ndashednwarrow (⇖) 51
\ndashedrightarrow (⇢) 51
\ndashedsearrow (⇘) 51
\ndashedswarrow (⇙) 52
\ndasheduparrow (⇡) 52
\ndashleftarrow (⇠) 53
\ndashrightarrow (⇢) 53
\nDashV (⊯) 36
\nDashv (⊮) 36
\ndashV (⊯) 36
\ndashv (⊮) 36
\ndashv (⊬) 38
\ndashVv (⊯) 36
\nddtstile (⫣) 40
\ndiagdown (⤡) 38
\ndiagup (⤢) 38
\ndivides (∤) 38
\nDoteq (≑) 38
\ndoteq (≑) 38
\ndoublefrown (⩔) 55
\ndoublefrowneq (⩒) 55
\ndoublesmile (⩕) 55
\ndoublesmileeq (⩖) 55
\nDownarrow (⇟) 52
\ndownarrow (↓) 52
\ndownarrowtail (↣) 52
\ndowndownarrows (⇊) 52
\ndownfilledspoon (⥥) 54
\ndownfootline (⊥) 38
\ndownfree (⊥) 38
\ndownharpoonccw (⥥) 53
\ndownharpooncw (⥥) 53
\ndownlsquigarrow (⥥) 52
\ndownmapsto (↧) 52
\ndownModels (⊧) 38
\ndownmodels (⊧) 38
\ndownpitchfork (⫛) 54
\ndownrsquigarrow (⥥) 52
\ndownspoon (⥥) 54
\ndownuparrows (⇵) 52
\ndownupharpoons (⥥) 53
\ndownVdash (⊧) 38
\ndownvdash (⊧) 38
\ndststile (⫤) 40
\ndtstile (⫤) 40
\ndttstile (⫤) 40
\ne . . . . . *see* \neq
\ne (≠) 38
\Nearrow (⇗) 49
\Nearrow (⇗) 50
\nearrow (↗) 49
\nearrow (↗) 47, 117
\nearrow (↗) 50
\nearrowtail (↗) 50
\nefilledspoon (⥥) 54
\nefootline (↗) 37
\nefree (↗) 37
\neg (¬) 73
\neg (¬) 74
negation . . . . *see* \neg *and* \sim
\neharpoonccw (↗) 53
\neharpooncw (↗) 53
\nelsquigarrow (↗) 50
\nemapsto (↗) 50
\neModels (⊭) 37
\nemodels (⊭) 37
\nenearrows (↗) 50
\nepitchfork (⫛) 54
\Neptune (Ψ) 79
\Neptune (Ψ) 79
\neptune (ϒ) 79
\neq (≠) 36
\neq (≠) 42
\neq (≠) 38
\neqbump (≠) 38
\neqcirc (≠) 38
\neqdot (≠) 38
\neqfrown (⩔) 55

\neqsim (≄) 38
\neqslantgtr (⪉) 44
\neqslantgtr (⪉) 45
\neqslantless (⪈) 44
\neqslantless (⪈) 45
\neqsmile (≄) 55
\nequal (≠) 38
\nequalclosed (≠) 38
\nequiv (≢) 35
\nequiv (≠) 38
\nequivclosed (≠) 38
\nersquigarrow (↝̸) 50
\nespoon (⌿) 54
\Neswarrow (⇗) 50
\neswarrow (⤢) 117
\neswarrow (⇗) 50
\neswarrows (⇗) 50
\neswbipropto (∾) 27
\neswcrossing (⤫) 38
\neswharpoonnwse (⥧) 53
\neswharpoons (⥧) 53
\neswharpoonsenw (⥧) 53
\Neswline (⫽) 37
\neswline (⤢) 37
\Neutral (O) 82
\neVdash (⊮) 37
\nevdash (⊬) 37
\newextarrow 70
\newmetrics 106
\newmoon (●) 79
\newmoon (●) 79
\newtie (▩) 16
\nexists (∄) 59
\nexists (∄) 59
\nexists (∄) 59
\nfallingdotseq (≒) 38
\nfrown (⌢) 55
\nfrowneq (≉) 55
\nfrowneqsmile (≉) 55
\nfrownsmile (≉) 55
\nfrownsmileeq (≉) 55
\NG (Ŋ) 11
\ng (ŋ) 11
\ngeq (≱) 44
\ngeq (≱) 43, 44
\ngeq (≱) 45
\ngeqclosed (≱) 45, 47
\ngeqdot (≱) 45
\ngeqq (≱) 44
\ngeqq (≱) 43
\ngeqq (≱) 45
\ngeqslant (⩾̸) 43
\ngeqslant (⩾̸) 45
\ngeqslantdot (⩾̸) 45
\ngets (↚) 53
\ngg (≫̸) 43
\ngg (≫̸) 45
\nggg (⋙̸) 45
\ngtr (≯) 44
\ngtr (≯) 43
\ngtr (≯) 45
\ngtrapprox (⪊) 44
\ngtrapprox (⪊) 43
\ngtrclosed (≯) 45, 47
\ngtrdot (⋗̸) 45
\ngtreqless (⋛) 45
\ngtreqlessslant (⋛) 45
\ngtreqqless (⋛) 45
\ngtrless (≹) 43
\ngtrless (≹) 45
\ngtrsim (≵) 44
\ngtrsim (≵) 43
\nhateq (≠) 38
\nhookleftarrow (↚) 53
\nhookrightarrow (↛) 53
\ni (∋) 59, 115
\ni (∋) 59
\nialpha (α) 14
\nibar . . . . . *see* \ownsbar
\nibeta (β) 14
\NibLeft (⬲) 85
\NibRight (⬳) 85
nibs 85
\NibSolidLeft (⬲) 85
\NibSolidRight (⬳) 85
nicefrac (package) . . 74, 130, 132
\nichi (χ) 14
\niepsilon (ε) 14
\nigamma (γ) 14
\niiota (ι) 14
\nilambda (λ) 14
\nin (∉) 59
\niomega (ω) 14
\niphi (ϕ) 14
\niplus (∋) 34
\nisigma (σ) 14
\nitheta (θ) 14
\niupsilon (υ) 14
\niv (∟) 60
\nj (ȷ) 14
\nlcirclearrowdown (⇂) . . . 52
\nlcirclearrowleft (↺) . . . 52
\nlcirclearrowright (↻) . . 52
\nlcirclearrowup (↾) 52
\nlcurvearrowdown (⤵) 52
\nlcurvearrowleft (↜) 52
\nlcurvearrowne (↗) 52
\nlcurvearrownw (↖) 52
\nlcurvearrowright (↷) 52
\nlcurvearrowse (↘) 52
\nlcurvearrowsw (↙) 52
\nlcurvearrowup (↑) 52
\nleadsto (⇝) 53
\nLeftarrow (⇍) 49
\nLeftarrow (⇍) 48
\nLeftarrow (⇍) 52
\nleftarrow (↚) 49
\nleftarrow (↚) 48
\nleftarrow (↚) 52
\nleftarrowtail (↢) 52
\nleftfilledspoon (⇽) 54
\nleftfootline (⇤) 38
\nleftfree (↫) 38
\nleftharpoonccw (↼) 53
\nleftharpooncw (↼) 53
\nleftleftarrows (⇇) 52
\nleftlsquigarrow (⇜) 52
\nleftmapsto (↤) 52
\nleftModels (⊭) 38
\nleftmodels (⊨) 38
\nleftpitchfork (⋔) 54
\nLeftrightarrow (⇎) 49
\nLeftrightarrow (⇎) 48
\nLeftrightarrow (⇎) 52
\nleftrightarrow (↮) 49
\nleftrightarrow (↮) . . 23, 48
\nleftrightarrow (↮) 52
\nleftrightarrows (⇷) 52
\nleftrightharpoondownup (↮) 53
\nleftrightharpoons (⇿) . . . 53
\nleftrightharpoonupdown (↮) 53
\nLeftrightline (⇎) 38
\nleftrightline (↮) 38
\nleftrightsquigarrow (↭) . 53
\nleftrsquigarrow (↜) 52
\nleftspoon (⇽) 54
\nleftVdash (⊯) 38
\nleftvdash (⊬) 38
\nleq (≰) 44
\nleq (≰) 43, 44
\nleq (≰) 45
\nleqclosed (≰) 45, 47
\nleqdot (≰) 45
\nleqq (≰) 44
\nleqq (≰) 43
\nleqq (≰) 45
\nleqslant (⩽̸) 43
\nleqslant (⩽̸) 45
\nleqslantdot (⩽̸) 45
\nless (≮) 44
\nless (≮) 43
\nless (≮) 45
\nlessapprox (⪅) 44
\nlessapprox (⪅) 43
\nlessclosed (≮) 45, 47
\nlessdot (≮) 45
\nlesseqgtr (⋚) 45
\nlesseqgtrslant (⋚) 45
\nlesseqqgtr (⋚) 45

\nlessgtr (≸) 43
\nlessgtr (≸) 45
\nlesssim (≴) 44
\nlesssim (≴) 43
\nlhookdownarrow (↓) 52
\nlhookleftarrow (↚) 52
\nlhooknearrow (↗) 52
\nlhooknwarrow (↖) 51
\nlhookrightarrow (↛) 51
\nlhooksearrow (↘) 51
\nlhookswarrow (↙) 51
\nlhookuparrow (↑) 51
\nll (≪) 43
\nll (≪) 45
\nLleftarrow (⇍) 51
\nlll (⋘) 45
\nmapsto (↦) 53
\nmid (∤) 34
\nmid (∤) 38
\nmodels (⊭) 38
\nmultimap (⊸) 54
\nndtstile ( ) 40
\nNearrow (⇗) 51
\nnearrow (↗) 48
\nnearrow (↗) 51
\nnearrowtail (↗) 51
\nnefilledspoon (↗) 54
\nnefootline (↗) 38
\nnefree (↗) 38
\nneharpoonccw (↗) 53
\nneharpooncw (↗) 53
\nnelsquigarrow (↗) 51
\nnemapsto (↗) 51
\nneModels (⊯) 38
\nnemodels (⊯) 38
\nnenearrows (↗) 51
\nnepitchfork (⋔) 54
\nnersquigarrow (↝) 51
\nnespoon (↗) 54
\nNeswarrow (⇗) 51
\nneswarrow (↗) 52
\nneswarrows (↗) 52
\nneswharpoonnwse (↗) 53
\nneswharpoons (↗) 53
\nneswharpoonsenw (↗) 53
\nNeswline (⫽) 38
\nneswline (⫽) 38
\nneVdash (⊮) 38
\nnevdash (⊬) 38
\nnststile ( ) 40
\nntstile ( ) 39
\nnttstile ( ) 39
\nNwarrow (⇖) 52
\nnwarrow (↖) 48
\nnwarrow (↖) 52
\nnwarrowtail (↖) 52
\nnwfilledspoon (↖) 54
\nnwfootline (↖) 38
\nnwfree (↖) 38
\nnwharpoonccw (↖) 53
\nnwharpooncw (↖) 53
\nnwlsquigarrow (↖) 52
\nnwmapsto (↖) 52
\nnwModels (⊮) 38
\nnwmodels (⊮) 38
\nnwnwarrows (↖) 52
\nnwpitchfork (⋕) 54
\nnwrsquigarrow (↖) 52
\nNwsearrow (⇖) 52
\nnwsearrow (↖) 52
\nnwsearrows (↖) 52
\nnwseharpoonnesw (↖) 53
\nnwseharpoons (↖) 53
\nnwseharpoonswne (↖) 53
\nNwseline (⫽) 38
\nnwseline (⫽) 38
\nnwspoon (↖) 54
\nnwVdash (⊮) 38
\nnwvdash (⊮) 38
no entry . . . . . *see* \noway
\NoBleech (⍓) 100
\NoChemicalCleaning (⍉) . . 100
nointegrals (wasysym package option) 29
\NoIroning (⍤) 100
non-commutative division . . . 70
nonbreaking space 81
NOR gates 81
\NORd ( ) 81
\NORl ( ) 81
norm . . *see* \lVert *and* \rVert
\NORr ( ) 81
\NORu ( ) 81
\NoSun (●) 101
not . . . . . *see* \neg
\not 36, 115
not equal (≠ vs. ≠) 36
\notasymp (≭) 36
\notbackslash (⍀) 80
\notbot (⫩) 59
\notdivides (∤) 36
\notequiv (≢) 36
\notin (∉) 59
\notin (∉) 59
\notin (∉) 60
\notin (∉) 59
\notni (∌) 59
\notowner (∌) 59
\notowns . . . *see* \notowner *and* \notni
\notperp (⫫) 36
\notslash (⌿) 80
\notsmallin (∉) 60
\notsmallowns (∌) 60
\nottop (⫮) 59
\NoTumbler (⍁) 100
\novelty (N) 104
\noway (⛔) 101
\nowns (∌) 59
\nparallel (∦) 34
\nparallel (∦) 38
\nparallelslant (⫻) 41
\nperp (⫡) 38
\npitchfork (⫛) 54
\nplus (⨣) 25
\nprec (⊀) 36
\nprec (⊀) 34
\nprec (⊀) 38
\nprecapprox (⪹) 36
\nprecapprox (⪹) 35
\nprecapprox (⪹) 38
\npreccurlyeq (⋠) 36
\npreccurlyeq (⋠) 35
\npreccurlyeq (⋠) 38
\npreceq (⪯) 36
\npreceq (⪯) 34
\npreceq (⪯) 38
\npreceqq (⪵) 35
\nprecsim (⪷) 36
\nprecsim (⪷) 35
\nprecsim (⪷) 38
\nrcirclearrowdown (⍇) . . . 52
\nrcirclearrowleft (⍈) . . . 52
\nrcirclearrowright (⍆) . . 52
\nrcirclearrowup (⍅) 52
\nrcurvearrowdown (⤷) 52
\nrcurvearrowleft (↫) 52
\nrcurvearrowne (⤲) 52
\nrcurvearrownw (↰) 52
\nrcurvearrowright (↬) 52
\nrcurvearrowse (↳) 52
\nrcurvearrowsw (⤶) 52
\nrcurvearrowup (⤴) 52
\nRelbar (⇏) 38
\nrelbar (↛) 38
\nrestriction (↾) 53
\nrhookdownarrow (↓) 52
\nrhookleftarrow (↚) 52
\nrhooknearrow (↗) 52
\nrhooknwarrow (↖) 52
\nrhookrightarrow (↛) 52
\nrhooksearrow (↘) 52
\nrhookswarrow (↙) 52
\nrhookuparrow (↑) 52
\nRightarrow (⇏) 49
\nRightarrow (⇏) 48

\nRightarrow (⇏) 52
\nrightarrow (↛) 49
\nrightarrow (⇾) 48
\nrightarrow (↛) 52
\nrightarrowtail (↣) 52
\nrightfilledspoon (⇻) . . . 54
\nrightfootline (⇹) 38
\nrightfree (⇺) 38
\nrightharpoonccw (⇼) 53
\nrightharpooncw (⇽) 53
\nrightleftarrows (⇄̸) 51
\nrightleftharpoons (⇌̸) . . . 53
\nrightlsquigarrow (⇝̸) 51
\nrightmapsto (↦̸) 51
\nrightModels (⊯) 38
\nrightmodels (⊭) 38
\nrightpitchfork (⋔̸) 54
\nrightrightarrows (⇉̸) 51
\nrightrsquigarrow (⇝̸) 51
\nrightspoon (⇻) 54
\nrightsquigarrow (⇝̸) 53
\nrightVdash (⊮) 38
\nrightvdash (⊬) 38
\nrisingdotseq (≓̸) 38
\nRrightarrow (⇏) 51
\nsdtstile (⫝̸) 39
\nSearrow (⇘̸) 51
\nsearrow (↘̸) 51
\nsearrowtail (↘̸) 51
\nsefilledspoon (⇘) 54
\nsefootline (⇘̸) 38
\nsefree (⇘̸) 38
\nseharpoonccw (⇂̸) 53
\nseharpooncw (ↂ̸) 53
\nselsquigarrow (⇜̸) 51
\nsemapsto (⇖̸) 51
\nseModels (⇗̸) 38
\nsemodels (⇗̸) 38
\nsenwarrows (⇖̸) 51
\nsenwharpoons (↿̸) 53
\nsepitchfork (⋔̸) 54
\nsersquigarrow (⇜̸) 51
\nsesearrows (⇘̸) 51
\nsespoon (⇘) 54
\nseVdash (⊱̸) 38
\nsevdash (⊰̸) 38
\nshortmid (∤) 34
\nshortmid (∤) 38
\nshortparallel (∦) 34
\nshortparallel (∦) 38
\nsim (≁) 36
\nsim (≁) 34
\nsim (≁) 38
\nsimeq (≄) 36
\nsimeq (≄) 35
\nsimeq (≄) 38
\nsmile (⌣̸) 55
\nsmileeq (⌣̸) 55
\nsmileeqfrown (⌢̸) 55
\nsmilefrown (⌢̸) 55
\nsmilefrowneq (⌢̸) 55
\nsqdoublefrown (⌢̸) 55
\nsqdoublefrowneq (⌢̸) 55
\nsqdoublesmile (⌣̸) 55
\nsqdoublesmileeq (⌣̸) 55
\nsqeqfrown (⌢̸) 55
\nsqeqsmile (⌣̸) 55
\nsqfrown (⌢̸) 55
\nsqfrowneq (⌢̸) 55
\nsqfrowneqsmile (⌣̸) 55
\nsqfrownsmile (⌢̸) 55
\nsqsmile (⌣̸) 55
\nsqsmileeq (⌣̸) 55
\nsqsmileeqfrown (⌢̸) 55
\nsqsmilefrown (⌢̸) 55
\nSqsubset (⋤) 42
\nsqSubset (⋤) 42
\nsqsubset (⋢) 42
\nsqsubset (⋢) 41
\nsqsubset (⋢) 42
\nsqsubseteq (⋣) 42
\nsqsubseteq (⋣) 41
\nsqsubseteq (⋣) 42
\nsqsubseteqq (⫋̸) 42
\nsqsubseteqq (⫋̸) 42
\nSqsupset (⋥) 42
\nsqSupset (⋥) 42
\nsqsupset (⋣) 42
\nsqsupset (⋣) 41
\nsqsupset (⋣) 42
\nsqsupseteq (⋣) 42
\nsqsupseteq (⋣) 41
\nsqsupseteq (⋣) 42
\nsqsupseteqq (⫌̸) 42
\nsqsupseteqq (⫌̸) 42
\nsqtriplefrown (⌢̸) 55
\nsqtriplesmile (⌣̸) 55
\nsquigarrowdownup (↭̸) . . . 52
\nsquigarrowleftright (↭̸) . 52
\nsquigarrownesw (⇎) 52
\nsquigarrownwse (⇎) 52
\nsquigarrowrightleft (⇍) . 52
\nsquigarrowsenw (↭̸) 52
\nsquigarrowswne (↭̸) 52
\nsquigarrowupdown (⇎) 52
\nssstile (⫝̸) 39
\nststile (⫝̸) 39
\nsttstile (⫝̸) 39
\nSubset (⋐̸) 42
\nSubset (⋐̸) 41
\nSubset (⋐̸) 42
\nsubset (⊄) 42
\nsubset (⊄) 42
\nsubseteq (⊈) 42
\nsubseteq (⊈) 41
\nsubseteq (⊈) 42
\nsubseteqq (⫅̸) 42
\nsubseteqq (⫅̸) 41
\nsubseteqq (⫅̸) 42
\nsucc (⊁) 36
\nsucc (⊁) 34
\nsucc (⊁) 38
\nsuccapprox (⪸̸) 36
\nsuccapprox (⪸̸) 35
\nsuccapprox (⪸̸) 38
\nsucccurlyeq (⋡) 36
\nsucccurlyeq (⋡) 35
\nsucccurlyeq (⋡) 38
\nsucceq (⪰̸) 36
\nsucceq (⪰̸) 34
\nsucceq (⪰̸) 38
\nsucceqq (⪺̸) 35
\nsuccsim (⋩) 36
\nsuccsim (⋩) 35
\nsuccsim (⋩) 38
\nSupset (⋑) 42
\nSupset (⋑) 41
\nSupset (⋑) 42
\nsupset (⊅) 42
\nsupset (⊅) 42
\nsupseteq (⊉) 42
\nsupseteq (⊉) 41
\nsupseteq (⊉) 42
\nsupseteqq (⫆̸) 42
\nsupseteqq (⫆̸) 41
\nsupseteqq (⫆̸) 42
\nSwarrow (⇙̸) 52
\nswarrow (↙̸) 52
\nswarrowtail (↙̸) 52
\nswfilledspoon (⇙) 54
\nswfootline (⇙̸) 38
\nswfree (⇙̸) 38
\nswharpoonccw (↙̸) 53
\nswharpooncw (↙̸) 53
\nswlsquigarrow (⇙̸) 52
\nswmapsto (↙̸) 52
\nswModels (⇙̸) 38
\nswmodels (⇙̸) 38
\nswnearrows (⇙̸) 52
\nswneharpoons (↙̸) 53
\nswpitchfork (⋔̸) 54
\nswrsquigarrow (⇙̸) 52
\nswspoon (⇙) 54
\nswswarrows (⇙̸) 52
\nswVdash (⊮) 38
\nswvdash (⊬) 38
\ntdtstile (⫝̸) 39
ntheorem (package) 73
\nthickapprox (≉) 35
\nto (↛) 53
\ntriangleeq (≜̸) 47
\ntriangleleft (⋪) 46
\ntriangleleft (⋪) 46
\ntriangleleft (⋪) 45, 47

\ntrianglelefteq (⋬) 46
\ntrianglelefteq (⋪) 46
\ntrianglelefteq (⋪) . . . 45, 47
\ntrianglelefteqslant (⋬) . 46
\ntriangleright (⋫) 46
\ntriangleright (⋫) 46
\ntriangleright (⋫) 45, 47
\ntrianglerighteq (⋭) 46
\ntrianglerighteq (⋭) 46
\ntrianglerighteq (⋭) . . 45, 47
\ntrianglerighteqslant (⋭) 46
\ntriplefrown (⋲) 55
\ntriplesim (⋳) 38
\ntriplesmile (⋴) 55
\ntststile (⫋) 39
\nttstile (⫋) 39
\ntttstile (⫋) 39
\ntwoheaddownarrow (⇟) 52
\ntwoheadleftarrow (↞) 35
\ntwoheadleftarrow (↞) . . . 52
\ntwoheadnearrow (↗) 52
\ntwoheadnwarrow (↖) 52
\ntwoheadrightarrow (↠) . . . 35
\ntwoheadrightarrow (↠) . . . 52
\ntwoheadsearrow (↘) 52
\ntwoheadswarrow (↙) 52
\ntwoheaduparrow (↟) 52
\nu (ν) 57
nuclear power plant . . *see* \SNPP
\NUL (␀) 81
null infinity . *see* alphabets, math
null set 73, 74
number sets *see* alphabets, math
number sign . . *see* \textnumero
numbers . . . . . *see* digits
circled 87, 105
numerals
Linear B 95
old style 22
\NumLock (Num) 80
\nUparrow (⇞) 52
\nuparrow (↟) 52
\nuparrowtail (⇡) 52
\nUpdownarrow (⇳) 52
\nupdownarrow (↕) 52
\nupdownarrows (⇅) 52
\nupdownharpoonleftright (⥮) 53
\nupdownharpoonrightleft (⥯) 53
\nupdownharpoons (⥍) 53
\nUpdownline (⫴) 38
\nupdownline (↿) 38
\nupfilledspoon (⥉) 54
\nupfootline (⊦) 38
\nupfree (⊬) 38
\nupharpoonccw (↿) 53
\nupharpooncw (↾) 53
\nuplsquigarrow (⇜) 52
\nupmapsto (↥) 52
\nupModels (⊯) 38
\nupmodels (⊭) 38
\nuppitchfork (⫛) 54
\nuprsquigarrow (⇝) 52
\nupspoon (⥈) 54
\nupuparrows (⇈) 52
\nupVdash (⊮) 38
\nupvdash (⊭) 38
\nuup (ν) 57
\nvargeq (≱) 44
\nvarleq (≰) 44
\nvarparallel (∦) 35
\nvarparallelinv (∤) 35
\nVDash (⊯) 36
\nVDash (⊮) 34
\nVDash (⊯) 38
\nVdash (⊮) 36
\nVdash (⊮) 35
\nVdash (⊯) 38
\nvDash (⊭) 36
\nvDash (⊭) 34
\nvDash (⊭) 38
\nvdash (⊬) 36
\nvdash (⊬) 34
\nvdash (⊬) 38
\nVvash (⊮) 36
\Nwarrow (⇖) 49
\Nwarrow (⇖) 50
\nwarrow (↖) 49
\nwarrow (↖) 47, 117
\nwarrow (↖) 50
\nwarrowtail (↖) 50
\nwfilledspoon (⥇) 54
\nwfootline (⊧) 36
\nwfree (⊭) 36
\nwharpoonccw (↿) 53
\nwharpooncw (↿) 53
\nwlsquigarrow (⇜) 50
\nwmapsto (↖) 50
\nwModels (⊯) 36
\nwmodels (⊭) 36
\nwnwarrows (⇖) 50
\nwpitchfork (⫙) 54
\nwrsquigarrow (⇝) 50
\Nwsearrow (⇗) 50
\nwsearrow (↖) 117
\nwsearrow (↖) 50
\nwsearrows (⇗) 50
\nwsebipropto (∽) 27
\nwsecrossing (⊬) 36
\nwseharpoonnesw (↿) 53
\nwseharpoons (⥋) 53
\nwseharpoonswne (↿) 53
\Nwseline (⥋) 37
\nwseline (⥋) 36
\nwspoon (⥇) 54
\nwVdash (⊭) 37
\nwvdash (⊬) 37

O

\O (Ø) 11
\o (ø) 11
o (*o*) 57
\oast (⊛) 28
\oasterisk (⊛) 28
\obackslash (⦸) 28
\obackslash (⦸) 28
\obar (⦶) 25
\Obelus (⨷) 105
\obelus (⨷) 105
\Obelus* (⨸) 105
\obelus* (⨸) 105
\oblong (⌺) 25
\obot (⦺) 28
\obslash (⦸) 25
\oc (⦲) 23
\ocirc (⊚) 28
\ocirc (⊚) 28
\ocircle (⦵) 25
\ocoasterisk (⊛) 28
\octagon (⯃) 88
octonions (𝕆) *see* alphabets, math
\Octosteel (⬢) 82
\od (⊚) 18
\odiv (⨸) 28
\odot (⊙) 28
\odot (⊙) 24
\odot (⊙) 28
\odplus (⦶) 27
\OE (Œ) 11, 128
\oe (œ) 11, 128
\officialeuro (€) 21
\offinterlineskip 114
ogonek (package) . . . 19, 130, 132
ogonek (◌̨) . . . . . *see* accents
\ogreaterthan (⧁) 25
\ohill (◌̊) 18
ohm . . . . . *see* \textohm
\ohm (Ω) 78
\Ohne (◌́) 99
\OHORN (Ơ) 11
\ohorn (σ) 11
\oiiint (∰) 31
\oiiint (∰) 33
\oiiintclockwise (∰) 31
\oiiintctrclockwise (∰) . . 31
\oiint (∯) 30
\oiint (∯) 29, 31
\oiint (∯) 32
\oiint (∯) 33
\oiint (∯) 33
\oiintclockwise (∯) 31
\oiintctrclockwise (∯) . . . 31
\oint (∮) 30

\oint (∮) 29
\oint (∯) 33
\ointclockwise (∲) 31
\ointclockwise (∯) 32
\ointclockwise (∲) 33
\ointctrclockwise (∳) 31
\ointctrclockwise (∯) 32
\ointctrclockwise (∳) 33
old-style digits 22
\oldstylenums 22
\oleft (⟢) 28
\olessthan (⦵) 25
\Omega (Ω) 57
\omega (ω) 57
\omegaup (ω) 57
\ominus (⊖) 28
\ominus (⊖) 24
\ominus (⊖) 28
\onlymove (□) 104
\oo (∞) 105
\oo (∞) 14
\ooalign 115
\open (̭) 20
open unit disk (𝔻) *see* alphabets, math
\openJoin (⟕) 35
\openo (ɔ) 14
\openo (ɔ) 15
\openo (ɔ) 14
\opentimes (⟇) 35
operators
  binary 24–28
  logical . *see* logical operators
  set . . . . . *see* set operators
  unary 23
\oplus (⊕) 28
\oplus (⊕) 23, 24, 113
\oplus (⊕) 28
\opposbishops (⬗) 104
\opposition (☍) 79
optical scaling 120
options . . . . *see* package options
or . . . . . *see* \vee
OR gates 81
\ORd ( ) 81
\oright (⟣) 28
\ORl ( ) 81
\OrnamentDiamondSolid (❖) . 90
ornaments 87, 88, 90
\ORr ( ) 81
orthogonal to . . . . . *see* \bot
\ORu ( ) 81
\oslash (⊘) 28
\oslash (⊘) 24
\oslash (⊘) 28
\ostar (⊛) 28
\otimes (⊗) 28
\otimes (⊗) 24
\otimes (⊗) 28
\otop (⟙) 28
\otriangle (⟁) 28, 47
\otriangleup (⟑) 28
ovals 89
\ovee (⟇) 25
\overarc ( ) 19
\overbrace ( ) 67
\overbrace ( ) 67
\overbrace ( ) 67
\overbrace ( ) 66
\overbracket ( ) 67
\overbracket ( ) 118, 119
\overbridge ( ) 18
\overgroup ( ) 67
\overgroup ( ) 67
\overleftarrow ( ) 66
\overleftharp ( ) 54
\overleftharpdown ( ) 54
\overleftharpoon ( ) 67
\overleftrightarrow ( ) . . 67
\overline ( ) 23, 66
\overlinesegment ( ) 67
\overparenthesis ( ) 118, 119
\Overrightarrow ( ) 66
overrightarrow (package) . 66, 130
\overrightarrow ( ) 66
\overrightharp ( ) 54
\overrightharpdown ( ) 54
\overrightharpoon ( ) 67
\overring (˚) 20
\overset 114
\overt (⌔) 28
\ovoid (◯) 28
\owedge (⟑) 25
\owns . . . . . *see* \ni
\owns (∋) 59
\owns (∋) 60
\owns (∋) 59
\ownsbar (⫋) 59

P

\P (¶) 10, 127
\p (.) 105
\p@ 117
package options
  a (esvect) 68
  b (esvect) 68
  bbgreekl (mathbbol) 76
  c (esvect) 68
  crescent (fge) 65
  d (esvect) 68
  e (esvect) 68
  f (esvect) 68
  g (esvect) 68
  german (keystroke) 80
  greek (babel) 57, 97
  h (esvect) 68
  integrals (wasysym) 29
  mathcal (euscript) 76
  mathscr (euscript) 76
  nointegrals (wasysym) . . . 29
  polutonikogreek (babel) . . 57
  sans (dsfont) 76
  utf8x (inputenc) 128
  varg (txfonts/pxfonts) . . . 58
packages
  longdiv 66
  accents . . . 65, 118, 130, 132
  amsbsy 124
  amsfonts 24, 34, 41, 47, 73, 76
  amsmath 9, 56, 65, 114, 123
  amssymb 9, 24, 34, 41, 47, 65, 73, 76, 97, 130, 134
  amstext 115, 117
  ar 78, 130
  arcs 19, 130, 131
  arev 75, 98, 130, 131
  ascii 81, 125, 130, 131
  babel 57, 97
  bbding . . 84–87, 89, 90, 111, 130, 131
  bbm 76, 130
  bbold 76, 130
  bm 124, 130, 132
  braket 61
  calligra 76, 130, 132
  calrsfs 76
  cancel 66
  cclicenses 21, 130, 131
  centernot 115
  chancery 130
  chemarr 69, 130, 131
  chemarrow 54, 69, 130
  china2e . 21, 56, 76, 77, 108, 109, 130, 132
  clock 102, 130, 131
  cmll 23, 27, 33, 40, 130
  colonequals . 23, 41, 130, 131
  combelow 19, 130, 132
  cypriot 96, 130, 132
  dblaccnt 118
  dictsym 106, 130, 131
  dingbat 85, 90, 111, 130, 131
  DotArrow 70, 130, 132
  dozenal 72, 130

dsfont 76, 130
epsdice 103, 130, 131
esint 32, 130
esvect 68, 130
eufrak 76
eurosym 21, 130, 131
euscript 76, 130
extarrows 69, 130, 131
extpfeil 70, 130, 131
extraipa 18, 130
fc 11, 16
fclfont 130
feyn 83, 130, 131
fge . . 54, 60, 65, 72, 75, 130, 131
fixmath 124
fontenc 9, 11, 16, 126
fontspec 129
fourier 21, 41, 58, 60, 64, 68, 85, 88, 101, 130
gensymb 78
graphics 54, 113
graphicx 19, 110, 113
harmony 99, 130, 131
harpoon 54, 130, 132
hhcount 103, 130, 132
hieroglf 92, 130, 131
holtpolt 70, 130
ifsym . 78, 89, 101, 102, 111, 113, 130, 131
igo 105, 130
inputenc 128
isoent 126
junicode 129
keystroke 80, 130, 131
latexsym . 24, 34, 41, 47, 73, 110, 130
linearA 92, 130, 131
linearb 95, 96, 130, 131
manfnt 99, 100, 130
marvosym 20, 72, 74, 79, 80, 82, 84, 100, 101, 111
mathabx 23, 26, 28, 30, 34, 36, 41, 42, 44, 46, 49, 56, 59–62, 65, 67, 72, 73, 79, 103, 110, 111, 130, 131, 134
mathbbol 76
mathcomp 72
mathdesign 20, 27, 33, 60, 63, 75, 130
mathdots 65, 70, 71, 117, 130, 131
mathrsfs 76, 130
mathtools 23, 39, 67, 69, 130, 131
mbboard 76, 130
metre . 18, 65, 105, 130, 131
milstd 81, 130
MnSymbol . . 23, 26–28, 32, 33, 36–38, 42, 45, 47, 50–55, 58, 59, 62, 65–67, 71, 74, 88, 130, 131
musixtex 99
nath 60, 64, 130
nicefrac 74, 130, 132
ntheorem 73
ogonek 19, 130, 132
overrightarrow 66, 130
phaistos 91, 130, 131
phonetic . . . 15, 18, 113, 130
pict2e 79
pifont 12, 84–88, 90, 113, 130
pigpen 108, 130, 131
pmboxdraw . . . 107, 130, 131
polynom 66
protosem 91, 130, 131
psnfss 87
pxfonts 23–25, 31, 34, 35, 41, 43, 47, 49, 55, 57–59, 73, 76, 110, 125
recycle 109, 130
rotating 21, 80
sarabian 97, 130, 132
savesym 110
semtrans . . 15, 19, 130, 131
shuffle 27, 130, 131
simplewick 119
simpsons 106, 130
skak 104, 130, 131
skull 103, 130, 131
slashed 115
staves 107, 130
steinmetz 79, 130, 132
stmaryrd 25, 29, 34, 41, 46, 48, 55, 60, 62, 111, 115, 129, 130
t4phonet . . 15, 19, 130, 131
teubner 21, 72, 97, 106, 130, 131
textcomp 9, 10, 16, 20–22, 48, 65, 74, 78, 98, 110, 125, 126, 130
timing 78
tipa . 12, 13, 15–17, 19, 113, 130, 131
tipx 13, 130, 131
trfsigns 40, 59, 70, 130
trsym 40, 130, 131
turnstile . . . 39, 40, 130, 131
txfonts 23–25, 31, 34, 35, 41, 43, 47, 49, 55, 57–59, 73, 76, 110, 112, 125, 130, 131
type1cm 110
ucs 128
ulsy 27, 55, 113, 130
underscore 10
undertilde 68, 130, 131
units 74
universa . . 90, 101, 130, 131
universal 84, 86, 90, 101, 130, 131
upgreek 58, 130, 131
upquote 125
url 125
ushort 68, 130, 132
vietnam 130
vntex 11, 16
wasysym 14, 20, 22, 24, 25, 29, 34, 35, 41, 43, 47, 71, 73, 78–80, 82, 86–88, 98, 111, 130
wsuipa . 14, 18, 20, 111, 113, 118, 130, 131
xfrac 74
yfonts 76, 77, 130, 131
yhmath 66, 68, 71, 117, 130
Pakin, Scott 1, 118, 129
\PaperLandscape (▭) 102
\PaperPortrait (▯) 102
par *see* \bindnasrepma, \invamp, and \parr
paragraph mark . . . . . *see* \P
\parallel (∥) 34, 63
\parallel (∥) 37
\ParallelPort (▬) 80
\parallelslant (⫽) 41
\parr (⅋) 27
\partial (∂) 59
\partial (𝜕) 59
\partial (𝝏) 60
\partialslash (⫽) 59
\partialvardint (⨍) 74
\partialvardlanddownint (⨏) 74
\partialvardlandupint (⨎) . 74
\partialvardlcircleleftint (∲) 50
\partialvardlcircleleftint (∲) 74
\partialvardlcirclerightint (∱) 50
\partialvardlcirclerightint (∱) 74
\partialvardoiint (∰) 74
\partialvardoint (∯) 74
\partialvardrcircleleftint (∲) 50
\partialvardrcircleleftint (∲) 74
\partialvardrcirclerightint (∱) 50
\partialvardrcirclerightint (∱) 74
\partialvardstrokedint (⨐) . 74
\partialvardsumint (∑) 74
\partialvartint (⨌) 74

\partialvartlanddownint (⨪) 74
\partialvartlandupint (⨩) . 74
\partialvartlcircleleftint (⨮) 50
\partialvartlcircleleftint (⨮) 74
\partialvartlcirclerightint (○) 50
\partialvartlcirclerightint (○) 74
\partialvartoiint (∰) 74
\partialvartoint (∮) 74
\partialvartrcircleleftint (⨮) 50
\partialvartrcircleleftint (⨮) 74
\partialvartrcirclerightint (○) 50
\partialvartrcirclerightint (○) 74
\partialvartstrokedint (⨍) 74
\partialvartsumint (⅀) 74
particle-physics symbols 83
parts per thousand . . . . . *see* \textperthousand
\partvoice (▣) 18
\partvoiceless (▣) 18
\passedpawn (♘) 104
pawn 104
pdfLaTeX 129
\Peace (☮) 90
\PencilLeft (✏) 85
\PencilLeftDown (✏) 85
\PencilLeftUp (✏) 85
\PencilRight (✏) 85
\PencilRightDown (✏) 85
\PencilRightUp (✏) 85
pencils 85
\pentagon (⬠) 88
\pentagram (★) 28
\pentam (_ᔓ_ᔓ_||_ᑌᑌ_ᑌᑌ_) 106
people . . . . . *see* faces
percent sign . . . . . *see* \%
\permil (‰) 22
\Perp (⫫) 35
\perp (⊥) 34, 116
\perp (⊥) 37
\perthousand (‰) 78
\Pfund (₿) 20
\PgDown (Page ↓) 80
\PgUp (Page ↑) 80
phaistos (package) . . 91, 130, 131
Phaistos disk 91
pharmaceutical prescription . *see* \textrecipe
\PHarrow (𐘎) 91
\phase (▱) 79
phasor 79
\PHbee (𐘏) 91
\PHbeehive (𐘐) 91
\PHboomerang (𐘑) 91
\PHbow (𐘒) 91
\PHbullLeg (𐘓) 91
\PHcaptive (𐘔) 91
\PHcarpentryPlane (𐘕) 91
\PHcat (𐘖) 91
\PHchild (𐘗) 91
\PHclub (𐘘) 91
\PHcolumn (𐘙) 91
\PHcomb (𐘚) 91
\PHdolium (𐘛) 91
\PHdove (𐘜) 91
\PHeagle (𐘝) 91
\PHflute (𐘞) 91
\PHgaunlet (𐘟) 91
\PHgrater (𐘠) 91
\PHhelmet (𐘡) 91
\PHhide (𐘢) 91
\PHhorn (𐘣) 91
\Phi (Φ) 57
\phi (ϕ) 57
\phiup (ϕ) 57
\PHlid (𐘤) 91
\PHlily (𐘥) 91
\PHmanacles (𐘦) 91
\PHmattock (𐘧) 91
\Phone (☎) 90
\phone (☎) 98
\PhoneHandset (✆) 90
phonetic (package) 15, 18, 113, 130
phonetic symbols 12–15
\photon (∼∼∼) 78
photons 83
\PHoxBack (𐘨) 91
\PHpapyrus (𐘩) 91
\PHpedestrian (𐘪) 91
\PHplaneTree (𐘫) 91
\PHplumedHead (𐘬) 91
\PHram (𐘭) 91
\PHrosette (𐘮) 91
\PHsaw (𐘯) 91
\PHshield (𐘰) 91
\PHship (𐘱) 91
\PHsling (𐘲) 91
\PHsmallAxe (𐘳) 91
\PHstrainer (𐘴) 91
\PHtattooedHead (𐘵) 91
\PHtiara (𐘶) 91
\PHtunny (𐘷) 91
\PHvine (𐘸) 91
\PHwavyBand (𐘹) 91
\PHwoman (𐘺) 91
physical symbols 78
\Pi (Π) 57
\pi (π) 57
\pi (π) 58
\Pickup (℘) 82
pict2e (package) 79
pifont (package) . . 12, 84–88, 90, 113, 130
pigpen (package) . . 108, 130, 131
pigpen cipher 108
{\pigpenfont A} (⌟) 108
{\pigpenfont B} (⌞) 108
{\pigpenfont C} (⌞) 108
{\pigpenfont D} (⊐) 108
{\pigpenfont E} (□) 108
{\pigpenfont F} (⊏) 108
{\pigpenfont G} (⌝) 108
{\pigpenfont H} (⊓) 108
{\pigpenfont I} (⌜) 108
{\pigpenfont J} (⌟) 108
{\pigpenfont K} (⌞) 108
{\pigpenfont L} (⌞) 108
{\pigpenfont M} (⊐) 108
{\pigpenfont N} (⊡) 108
{\pigpenfont O} (⊏) 108
{\pigpenfont P} (⌝) 108
{\pigpenfont Q} (⊓) 108

{\pigpenfont R} (⌜) 108
{\pigpenfont S} (⋁) 108
{\pigpenfont T} (>) 108
{\pigpenfont U} (<) 108
{\pigpenfont V} (⋀) 108
{\pigpenfont W} (⋁) 108
{\pigpenfont X} (>) 108
{\pigpenfont Y} (<) 108
{\pigpenfont Z} (⋀) 108
pilcrow . . . . . *see* \P
pipe . . . . . *see* \textpipe
\Pisces (♓) 79
\pisces (♓) 79
\Pisymbol 113
\pitchfork (⋔) 73
\pitchfork (⋔) 34
\pitchfork (⋔) 54
pitchfork symbols . . . 34, 54, 73
Pitman's base-12 symbols . . . 72
\piup (π) 57
\planck (ħ) 15
\Plane (✈) 90
planets 79
playing cards . . . . *see* card suits
Plimsoll line 115
\Plus (✚) 86
\plus (+) 27
plus-or-minus sign . . . . . *see* \pm
\PlusCenterOpen (✜) 86
\pluscirc (⊕) 26
\PlusOutline (✙) 86
plusses 86
\PlusThinCenterOpen (✛) . . . 86
\Pluto (♇) 79
\Pluto (♇) 79
\pluto (♇) 79
\pm (±) 24
\pm (±) 27
\pm (±) 105
\pmb 124
pmboxdraw (package) . . 107, 130, 131
\pmod 56
\pod 56
\pointer (➪) 98
pointing finger . . . . . *see* fists
\Pointinghand (☞) 100
\polishhook (˛) 20
\polter (👻) 70
polutonikogreek (babel package option) 57
polygons 88
polynom (package) 66
polynomial division 66
polytonic Greek 57
\Postbox (✉) 109
PostScript . . 58, 77, 84, 113, 122
PostScript fonts 84, 113
\Pound (₰) 21
\pounds (£) 10, 126, 127
power set . . *see* alphabets, math
\powerset (℘) 59
\Pp (⁝) 105
\pp (⁝) 105
\ppm (⁒) 105
\Ppp (⁝) 105
\ppp (⁝) 105
\Pppp (⁞) 105
\pppp (⁞) 105
\Ppppp (⁞) 105
\ppppp (⁞) 105
\Pr (Pr) 56
\prec (≺) 34
\prec (≺) 37
\precapprox (⪷) 36
\precapprox (⪷) 34
\precapprox (⪷) 37
\preccurlyeq (≼) 36
\preccurlyeq (≼) 34
\preccurlyeq (≼) 37
\precdot (≺) 36
\preceq (⪯) 34
\preceq (⪯) 37
\preceqq (⪳) 35
\precnapprox (⪹) 36
\precnapprox (⪹) 34
\precnapprox (⪹) 38
\precneq (⪱) 36
\precneqq (⪵) 35
\precnsim (⋨) 36
\precnsim (⋨) 34
\precnsim (⋨) 38
\precsim (≾) 36
\precsim (≾) 34
\precsim (≾) 37
prescription . . . *see* \textrecipe
present-value symbols 118
\prime (′) 73
\prime (′) 74
\Printer (🖷) 80
printer's fist . . . . . *see* fists
probabilistic independence . . 116
\prod (∏) 29
\prod (∏) 33
projective space (ℙ) . . . . . *see* alphabets, math
\projlim (proj lim) 56
pronunciation symbols . . . . . *see* phonetic symbols
proof, end of 73
proper subset/superset . . . . . *see* \subsetneq/\supsetneq
proper vertices 83
\propto (∝) 73
\propto (∝) 34
\propto (∝) 37
proto-Semitic symbols 91
protosem (package) . 91, 130, 131
\ProvidesPackage 130
\PrtSc (PrtSc) 80
\ps (␣) 105
pseudographics 107
\Psi (Ψ) 57
\psi (ψ) 57
\psiup (ψ) 57
psnfss (package) 87
\Pu (·) 99
pullback diagrams 117
pulse diagram symbols 78
\PulseHigh (⎍) 78
\PulseLow (⎍) 78
punctuation 11, 12
pushout diagrams 117
\pwedge (∧) 15
pxfonts (package) 23–25, 31, 34, 35, 41, 43, 47, 49, 55, 57–59, 73, 76, 110, 125
\Pxp (⁝) 105
\pxp (⁝) 105

Q

Q.E.D. 73
\qoppa (ϟ) 97
\qside (≪) 104
\Quadrad (𝟙) 65
\quadrad (𝟙) 65
\Quadras (𝟚) 65
\quadras (𝟚) 65
quarter note . . . *see* musical symbols
\quarternote (♩) 98
\quarternote (♩) 98
quaternions (ℍ) . . *see* alphabets, math
quaver . . . . *see* musical symbols
queen 104
\quotedblbase („) 11, 128
\quotesinglbase (‚) . . . 11, 128

R

\R (∼) 105
\r (̊) 16
\r (∼) 105
\Radiation (☢) 102
radicals . . . *see* \sqrt *and* \surd
\Radioactivity (☢) 82
\Rain (☔) 101
\RainCloud (🌧) 101
raising . . . . . *see* \textraising
\RaisingEdge (⌜) 78
\Rangle (⩾) 76
\rAngle (⟫) 64

\rangle (⟩) 23, 61
\rangle (⟩) 62
\ranglebar (⟩) 62
\RArrow ( ) 80
\rarrowfill 69
\ratio (:) 41
\RATIONAL (ℚ) 56
\Rational (ℚ) 56
rational numbers (ℚ) . . . . . *see* alphabets, math
rationalized Planck constant . *see* \hbar
\Rbag (⟆) 60
\rbag (⟆) 60
\rbrace ( ) 62
\Rbrack (⟧) 76
\rBrack (⟧) 64
\rc ( ) 18
\rCeil (⌉) 64
\rceil (⌉) 61
\rceil ( ) 62
\rcirclearrowdown (↻) 50
\rcirclearrowleft (↺) 50
\rcirclearrowright (↻) . . . 50
\rcirclearrowup (↺) 50
\rcircleleftint (∱) 33
\rcirclerightint (∱) 33
\rcorners (⌟) 60
\rcurvearrowdown (⤵) 50
\rcurvearrowleft (↶) 50
\rcurvearrowne (↗) 50
\rcurvearrownw (↖) 50
\rcurvearrowright (↷) 50
\rcurvearrowse (↘) 51
\rcurvearrowsw (↙) 51
\rcurvearrowup (↱) 51
\rdbrack (⟧) 62
\Re (ℜ) 59
\REAL (R) 56
\Real (ℝ) 56
real numbers (ℝ) . *see* alphabets, math
recipe . . . . . *see* \textrecipe
\recorder (⌕) 98
\Rectangle (▮) 89
\RectangleBold (▮) 89
rectangles 89, 90
\RectangleThin (▮) 89
\Rectpipe (▯) 82
\Rectsteel (■) 82
recycle (package) 109, 130
\recycle ( ) 109
recycling symbols 109
reduced quadrupole moment *see* \rqm
\reflectbox 113
registered trademark . . . . . *see* \textregistered
relational symbols 34
binary . 34–36, 39–45, 54, 55
negated binary . . 34–36, 38
triangle 46, 47
\Relbar (=) 55, 114
\Relbar (=) 37
\relbar (−) 55, 114
\relbar (−) 37
\Request (⍰) 109
\resizebox 54, 110
\Respondens (∼) 105
\respondens (∼) 105
response (ℝ) 129
\restoresymbol 110
\restriction . . . . . *see* \upharpoonright
\restriction (↾) 49
\restriction (↾) 53
retracting . *see* \textretracting
\Return ( ) 80
return . . . . . *see* carriage return
\revaw ( ) 63
\revD (⊐) 15
\revddots (⋰) 117
\reve (ɘ) 14
\reveject (ɿ) 14
\revepsilon (ɜ) 14, 113
reverse solidus . . . . . *see* \textbackslash
reversed symbols 113
\reversedvideodbend ( ) . . 99
\revglotstop (ʕ) 14
\Rewind (◀) 100
\RewindToIndex (⏮) 100
\RewindToStart (⏮) 100
\rfilet ( ) 62
\rFloor (⟫) 64
\rfloor (⌋) 61
\rfloor ( ) 62
\rgroup ( ) 61
\rgroup ( ) 62
\RHD (▶) 25
\rhd (▷) 24, 25
\rhd (▷) 45, 47
\rho (ρ) 57
\rho (ρ) 58
\rhookdownarrow (↧) 51
\rhookleftarrow (↩) 51
\rhooknearrow (↗) 51
\rhooknwarrow (↖) 51
\rhookrightarrow (↪) 51
\rhooksearrow (↘) 51
\rhookswarrow (↙) 50
\rhookuparrow (↥) 50
\rhoup (ρ) 57
\right 61, 63, 64, 110, 112
\rightangle (∟) 75
\RIGHTarrow (▶) 98
\Rightarrow (⇒) 23, 47
\Rightarrow (⇒) 50
\rightarrow (→) 49
\rightarrow (→) 47
\rightarrow (→) 50
\rightarrowtail (↣) 48
\rightarrowtail (↣) 50
\rightarrowtriangle (⇾) . . . 48
\rightbarharpoon (⥋) 49
\RIGHTCIRCLE (◗) 98
\RIGHTcircle (◑) 98
\Rightcircle (◗) 98
\RightDiamond (◆) 89
\rightevaw ( ) 63
\rightfilledspoon (⇻) 54
\rightfootline (⊣) 37
\rightfree (⊣) 37
\righthalfcap (⌝) 27
\righthalfcup (⌟) 27
\righthand (☞) 85
\rightharpooncccw (⇁) 53
\rightharpooncw (⇁) 53
\rightharpoondown (⇁) 49
\rightharpoondown (⇁) 48
\rightharpoonup (⇀) 49
\rightharpoonup (⇀) 48
\rightleftarrows (⇄) 49
\rightleftarrows (⇄) 48
\rightleftarrows (⇄) 50
\rightleftharpoon (⇌) 49
\rightleftharpoons (⇌) . . . 49
\rightleftharpoons (⇌) . . . 48
\rightleftharpoons (⇌) . . . 48
\rightleftharpoons (⇌) 53
\rightleftharpoonsfill 69
\rightlsquigarrow (⇝) 50
\rightmapsto (↦) 50
\rightModels (⊨) 37
\rightmodels (⊨) 37
\rightmoon (☽) 79
\rightmoon (☽) 79
\rightp (˃) 20
\rightpitchfork (⋔) 54

\rightpointleft (☜) 85
\rightpointright (☞) 85
\rightpropto (∝) 37
\rightrightarrows (⇉) 49
\rightrightarrows (⇉) 48
\rightrightarrows (⇉) 50
\rightrightharpoons (⥤) . . . 49
\rightrsquigarrow (⇝) 50
\Rightscissors (✂) 84
\rightslice (⋉) 25
\rightslice (⋉) 37
\rightspoon (⟜) 54
\rightsquigarrow (⇝) 49
\rightsquigarrow (⇝) 48
\rightsquigarrow (⇝) 51
\rightt (⊢) 20
\righttherefore (∴) 26, 71
\rightthreetimes (⋌) 73
\rightthreetimes (⋌) 24
\rightthreetimes (⋌) 26
\rightthumbsdown (👎) 85
\rightthumbsup (👍) 85
\righttoleftarrow (↼) 49
\Righttorque (⥳) 82
\rightturn (⟳) 98
\rightVdash (⊩) 37
\rightvdash (⊢) 37
\rightwave (≀) 63
\rightY (⋋) 26
\ring (˚) 66
ring (˚) . . . . . *see* accents
ring equal to . . . . . *see* \circeq
ring in equal to . . . . *see* \eqcirc
\riota (℩) 15
\rip (⨤) 103
\risingdotseq (≓) 36
\risingdotseq (≓) 34
\risingdotseq (≓) 37
\rJoin (⋊) 35
\rlap 89, 116, 117
\rmoustache (⎱) 61
\rmoustache (⎱) 62
Roman coins 21
Romanian comma-belo accent (◌ ̦) . . . . . *see* accents
rook 104
roots . . . . . *see* \sqrt
\rotatebox 19, 113
rotated symbols . . 12–15, 19, 113
rotating (package) 21, 80
\rotm (ɯ) 15
\rotOmega (ʊ) 15
\rotr (ɹ) 15
\rotvara (ɒ) 15
\rotw (ʍ) 15
\roty (ʎ) 15
\RoundedLsteel (Ʇ) 82
\RoundedTsteel (Ʇ) 82
\RoundedTTsteel (Ʇ) 82
\Rparen (⦆) 76
\rqm (ɾ) 115
\rrangle (⫸) 62
\rrbracket (⫸) 62
\rrbracket (⫸) 64
\rrceil (⌉) 60
\rrfloor (⌋) 60
\Rrightarrow (⇛) 49
\Rrightarrow (⇛) 50
\rrparenthesis (⦆) 60
\RS (▲) 81
\rsem (⦈) 62
\rsemantic . . . . . *see* \rdbrack
\Rsh (↱) 49
\Rsh (↱) 48
\Rsh (↱) 50
\rtimes (⋊) 26
\rtimes (⋊) 24
\rtimes (⋊) 26
\rtriple 64
\rVert (‖) 64
\rVert (‖) 61
\rvert (|) 61
\rwave (≀) 63
\rWavy (≀) 62
\rwavy (≀) 62

S

\S (§) 10, 127
\SAa (ⱺ) 97
\SAb (ⱻ) 97
\SAd (ⱨ) 97
\SAdb (Ⱨ) 97
\SAdd (Ⱨ) 97
\SAf (ⱷ) 97
safety-related symbols 82
\SAg (ⱪ) 97
\SAga (Ⱬ) 97
\Sagittarius (♐) 79
\sagittarius (♐) 79
\SAh (ⱶ) 97
\SAhd (ⱴ) 97
\SAhu (ⱶ) 97
\SAk (ⱪ) 97
\SAl (ⱡ) 97
\SAlq (ⱨ) 97
\SAm (Ɱ) 97
\samebishops (⛾) 104
\Sampi (ϡ) 97
\sampi (ϡ) 97
\SAn (ⱨ) 97
sans (dsfont package option) . . 76
\SAo (ⱺ) 97
\SAq (ⱷ) 97
\SAr (ⱹ) 97
\sarabfamily 97
sarabian (package) . . 97, 130, 132
\SAs (ⱽ) 97
\SAsa (ⱽ) 97
\SAsd (ⱽ) 97
\SAsv (ⱶ) 97
\SAt (Ⱦ) 97
\SAtb (ⱷ) 97
\SAtd (Ⱦ) 97
\satellitedish (🛰) 90
satisfies . . . . . *see* \models
\Saturn (♄) 79
\Saturn (♄) 79
\saturn (♄) 79
savesym (package) 110
\savesymbol 110
\SAw (ⱳ) 97
\SAy (ⱸ) 97
\SAz (Ⱬ) 97
\SAzd (ⱬ) 97
\Sborder (▭) 90
\scalebox 110
scaling
  mechanical 120, 122
  optical 120
\scd (ᴅ) 14
\scg (ɢ) 14
\schwa (ə) 14
\schwa (ə) 15
Schwartz distribution spaces . *see* alphabets, math
\sci (ɪ) 14
scientific symbols 78–83
\ScissorHollowLeft (✀) . . . 84
\ScissorHollowRight (✁) . . 84
\ScissorLeft (✂) 84
\ScissorLeftBrokenBottom (✄) 84
\ScissorLeftBrokenTop (✄) . 84
\ScissorRight (✂) 84
\ScissorRightBrokenBottom (✂) 84
\ScissorRightBrokenTop (✂) 84
scissors 84, 85
\scn (ɴ) 14
\scoh (⌒) 40
\Scorpio (♏) 79
\scorpio (♏) 79
\scr (ʀ) 14

script letters *see* alphabets, math
\scripta (𝒶) 14
\scriptg (𝑔) 14
\scriptscriptstyle 116
\scriptstyle 116
\scriptv (𝓋) 14
\Scroll (Scroll) 80
\scu (ᴜ) 14
\scy (ʏ) 14
\sddtstile (⫣) 39
\sdststile (⫤) 39
\sdtstile (⫥) 39
\sdttstile (⫦) 39
seagull . . . . . *see* \textseagull
\Searrow (⇘) 49
\Searrow (⇘) 50
\searrow (↘) 49
\searrow (↘) 47, 117
\searrow (↘) 50
\searrowtail (⤘) 50
\sec (sec) 56
\Sech (𝅘𝅥𝅯) 99
\SechBL (𝅘𝅥𝅯) 99
\SechBl (𝅘𝅥𝅯) 99
\SechBR (𝅘𝅥𝅯) 99
\SechBr (𝅘𝅥𝅯) 99
\second (″) 73
seconds, angular . . . *see* \second
\secstress (ˌ) 20
section mark . . . . . *see* \S
\SectioningDiamond (⟐) . . 102
sedenions (𝕊) *see* alphabets, math
\sefilledspoon (⤥) 54
\sefootline (⤥) 37
\sefree (⤥) 37
segmented digits 78
\seharpoonccw (⤥) 53
\seharpooncw (⤥) 53
\selectfont 9
\selsquigarrow (⤳) 50
semantic valuation 62, 64
\semapsto (⤑) 50
semibreve . . *see* musical symbols
semidirect products . . 24, 26, 73
semiquaver . *see* musical symbols
semitic transliteration . . . 15, 19
\seModels (⪨) 37
\semodels (⪨) 37
semtrans (package) . . 15, 19, 130, 131
\senwarrows (⬋) 50
\senwharpoons (⥋) 53
\SePa (𐬹) 99
\separated (⫽) 37
\sepitchfork (⫛) 54
\seppawns (○⇢○) 104
\SerialInterface (⌨) 80
\SerialPort (⌨) 80
\sersquigarrow (⥳) 50
\sesearrows (⤡) 50
\sespoon (⥥) 54
set operators
intersection . . . . . *see* \cap
membership . . . . . *see* \in
union . . . . . *see* \cup
\setminus (∖) 24
\setminus (⧹) 27
\seVdash (⫧) 36
\sevdash (⊣) 37
SGML 126
sha (Ш) 113
\sharp (♯) 73, 98
\sharp (♯) 74
\shfermion (⏠) 83
\Shift (Shift ⇑) 80
\shift (↕) 23
\Shilling (₰) 20
\shneg (↑) 23
\shortcastling (O-O) 104
\shortdownarrow (↓) 48
\ShortFifty (𝆖) 100
\ShortForty (𝆖) 100
\shortleftarrow (←) 48
\shortmid (∣) 34
\shortmid (∣) 27
\ShortNinetyFive (𝆕) 100
\shortparallel (∥) 34
\shortparallel (∥) 36
\ShortPulseHigh (⎍) 78
\ShortPulseLow (⎍) 78
\shortrightarrow (→) 48
\ShortSixty (𝆖) 100
\ShortThirty (𝆖) 100
\shortuparrow (↑) 48
\showclock 102
\shpos (↓) 23
shuffle (package) . . . 27, 130, 131
\shuffle (⧢) 27
shuffle product (⧢) 27
\SI (✲) 81
\Sigma (Σ) 57
\sigma (σ) 57
\sigmaup (σ) 57
\sim (∼) 34, 114, 125
\sim (∼) 36
\simcolon (∼:) 41
\simcoloncolon (∼::) 41
\simeq (≃) 34
\simeq (≃) 36
simplewick (package) 119
simpsons (package) 106, 130
Simpsons characters 106
\sin (sin) 56
\sincoh (⌣) 40
\sinh (sinh) 56
\SixFlowerAlternate (✾) . . . 87
\SixFlowerAltPetal (❋) . . . 87
\SixFlowerOpenCenter (✻) . . 87
\SixFlowerPetalDotted (❀) . 87
\SixFlowerPetalRemoved (✼) 87
\SixFlowerRemovedOpenPetal (❀) 87
\SixStar (✶) 87
\SixteenStarLight (✺) 87
sixteenth note *see* musical symbols
\sixteenthnote (♬) 98
skak (package) 104, 130, 131
skull (package) 103, 130, 131
\skull (☠) 103
\slash (/) 125
\slashb (∕) 14
\slashc (⌿) 14
\slashd (𝍀) 14
\slashdiv (⨸) 26
slashed (package) 115
\slashed 115
slashed letters 115
slashed.sty (file) 115
\slashu (⫻) 14
\Sleet (⛆) 101
\sliding (▩) 18
\smallbosonloop 83
\smallbosonloopA 83
\smallbosonloopV 83
\SmallCircle (○) 89
\SmallCross (×) 89
\smalldiamond (⋄) 28
\SmallDiamondshape (◇) . . . 89
\smallfrown (⌢) 34
\smallfrown (⌢) 55
\SmallHBar (⁻) 89
\smallin (∈) 60
\smallint (∫) 74
\SmallLowerDiamond (◆) . . . 89
\smalllozenge (◊) 88
\smallowns (∋) 60
\smallpencil (✎) 85
\smallprod (∏) 26
\SmallRightDiamond (◆) . . . 89
\smallsetminus (⧹) 24
\smallsetminus (⧹) 27
\smallsmile (⌣) 34
\smallsmile (⌣) 55
\SmallSquare (□) 89
\smallsquare (▫) 28
\smallstar (⋆) 28
\SmallTriangleDown (▽) . . . 89
\smalltriangledown (▿) 28

\smalltriangledown (▿) . 28, 47
\SmallTriangleLeft (◁) . . . 89
\smalltriangleleft (◃) 28
\smalltriangleleft (◃) . 28, 47
\SmallTriangleRight (▷) . . . 89
\smalltriangleright (▹) . . . 28
\smalltriangleright (▹) 28, 47
\SmallTriangleUp (△) 89
\smalltriangleup (▵) 28
\smalltriangleup (▵) . . . 28, 47
\SmallVBar (|) 89
\smile (⌣) 34
\smile (⌣) 55
smile symbols 55
\smileeq (⩒) 55
\smileeqfrown (⩕) 55
\smilefrown (⩓) 55
\smilefrowneq (⩔) 55
\Smiley (☺) 101
\smiley (☺) 98
smiley faces 81, 98, 101, 108
\sndtstile (⫣) 40
\Snow (❄) 101
\SnowCloud (🌨) 101
\Snowflake (❋) 87
\SnowflakeChevron (❄) 87
\SnowflakeChevronBold (❆) . 87
snowflakes 87, 88
\SNPP (㊙) 106
\snststile (⫤) 40
\sntstile (⫥) 40
\snttstile (⫦) 40
\SO (␎) 81
\SOH (␁) 81
South Arabian alphabet 97
space
  thin 123
  visible . . . . . *see* \textvisiblespace
\Spacebar ( ) 80
spades (suit) 73–75, 90
\spadesuit (♠) 73
\spadesuit (♠) 74
\Sparkle (❇) 87
\SparkleBold (❇) 87
sparkles 87, 88
“special” characters 10
\SpecialForty (🕮) 100
\sphericalangle (∢) 73
\sphericalangle (◁) 73
\sphericalangle (◁) 74
\SpinDown ()↓. 89
\SpinUp (↑) 89
\spirituslenis (◌̓) 65
\spirituslenis (◌̓) 65
\splitvert (⦙) 81
spoon symbols 54
\spreadlips (◌͍) 18
\sqbullet (▪) 26
\sqcap (⊓) 26
\sqcap (⊓) 24
\sqcap (⊓) 26
\sqcapdot (⩇) 26
\sqcapplus (⩈) 25
\sqcapplus (⩈) 26
\sqcup (⊔) 26
\sqcup (⊔) 23, 24
\sqcup (⊔) 26
\sqcupdot (⊍) 26
\sqcupplus (⊎) 25
\sqcupplus (⊎) 26
\sqdoublecap (⩋) 26
\sqdoublecup (⩊) 26
\sqdoublefrown (⩔) 55
\sqdoublefrowneq (⩕) 55
\sqdoublesmile (⩓) 55
\sqdoublesmileeq (⩖) 55
\sqeqfrown (⩗) 55
\sqeqsmile (⩘) 55
\sqfrown (⩙) 55
\sqfrowneq (⩚) 55
\sqfrowneqsmile (⩛) 55
\sqfrownsmile (⩜) 55
\sqiiint (⨌) 31
\sqiint (⨍) 31
\sqiint (⨎) 32
\sqint (⨏) 31
\sqint (⨐) 32
\sqrt (√) 66, 116–117
\sqsmile (⌣) 55
\sqsmileeq (⩒) 55
\sqsmileeqfrown (⩕) 55
\sqsmilefrown (⩓) 55
\Sqsubset (⧏) 42
\sqSubset (⧏) 42
\sqsubset (⊏) 42
\sqsubset (⊏) 41
\sqsubset (⊏) 42
\sqsubseteq (⊑) 42
\sqsubseteq (⊑) 41
\sqsubseteq (⊑) 42
\sqsubseteqq (⫅) 42
\sqsubseteqq (⫅) 42
\sqsubsetneq (⋤) 42
\sqsubsetneq (⋤) 42
\sqsubsetneqq (⫋) 42
\sqsubsetneqq (⫋) 42
\Sqsupset (⧐) 42
\sqSupset (⧐) 42
\sqsupset (⊐) 42
\sqsupset (⊐) 41
\sqsupset (⊐) 42
\sqsupseteq (⊒) 42
\sqsupseteq (⊒) 41
\sqsupseteq (⊒) 42
\sqsupseteqq (⫆) 42
\sqsupseteqq (⫆) 42
\sqsupsetneq (⋥) 42
\sqsupsetneq (⋥) 42
\sqsupsetneqq (⫌) 42
\sqsupsetneqq (⫌) 42
\sqtriplefrown (⩠) 55
\sqtriplesmile (⩡) 55
\Square (□) 89
\Square (□ vs. □ vs. □) . . . 111
\Square (□) 86
\Square (□) 89
\square (▫) 26
\square (□) 73
\square (□) 28
square root . . . . . *see* \sqrt
  hooked . . . . . *see* \hksqrt
\SquareCastShadowBottomRight (❏) 89
\SquareCastShadowTopLeft (❐) 89
\SquareCastShadowTopRight (❐) 89
\Squaredot (·) 74
\squaredots (::) 26, 71
\Squarepipe (◘) 82
squares 89–90, 105
\SquareShadowA (❑) 89
\SquareShadowB (❑) 89
\SquareShadowBottomRight (❏) 89
\SquareShadowC (❑) 89
\SquareShadowTopLeft (❐) . . 89
\SquareShadowTopRight (❐) . 89
\SquareSolid (■) 89
\Squaresteel (■) 82
\squarewithdots (⚂) 90
\squigarrowdownup (↹) 50
\squigarrowleftright (↭) . . 50
\squigarrownesw (⇗) 50
\squigarrownwse (⇘) 50
\squigarrowrightleft (↭) . . 50
\squigarrowsenw (⇖) 50
\squigarrowswne (⇗) 50
\squigarrowupdown (↕) 50
\squplus (⊞) 26
\SS (SS) 11
\ss (ß) 11
\ssdtstile (⫢) 40
\ssearrow (↘) 48
\sslash (⫽) 25
\sssttstile (⫧) 40

\ssstile ( ) 40
\sssttstile ( ) 40
\sswarrow (↙) 48
\stackrel 23, 114, 118
standard state 115
\star (⋆) 24, 118
\star (⋆) 28
Star of David 87
\starredbullet (✦) 88
stars 73, 87, 88
\stater (⚡) 21
statistical independence 116
\staveI ( ) 107
\staveII ( ) 107
\staveIII ( ) 107
\staveIV ( ) 107
\staveIX ( ) 107
\staveL ( ) 107, 108
\staveLI () 107
\staveLII ( ) 107
\staveLIII ( ) 107
\staveLIV ( ) 107
\staveLIX ( ) 108
\staveLV () 107
\staveLVI ( ) 108
\staveLVII ( ) 108
\staveLVIII ( ) 108
\staveLX ( ) 108
\staveLXI ( ) 108
\staveLXII ( ) 108
\staveLXIII () 108
\staveLXIV ( ) 108
\staveLXV ( ) 108
\staveLXVI ( ) 108
\staveLXVII ( ) 108
\staveLXVIII ( ) 108
staves 107
staves (package) 107, 130
\staveV ( ) 107
\staveVI ( ) 107
\staveVII ( ) 107
\staveVIII ( ) 107
\staveX ( ) 108
\staveXI ( ) 108
\staveXII ( ) 108
\staveXIII ( ) 108
\staveXIV ( ) 108
\staveXIX ( ) 108
\staveXL ( ) 108
\staveXLI ( ) 108
\staveXLII ( ) 108
\staveXLIII () 108
\staveXLIV () 108
\staveXLIX () 108
\staveXLV () 108
\staveXLVI () 108
\staveXLVII () 107
\staveXLVIII () 107
\staveXV () 108
\staveXVI () 108
\staveXVII () 108
\staveXVIII () 108
\staveXX () 108
\staveXXI () 108
\staveXXII () 108
\staveXXIII () 108
\staveXXIV () 107
\staveXXIX () 107
\staveXXV () 107
\staveXXVI () 107
\staveXXVII () 107
\staveXXVIII () 107
\staveXXX () 107
\staveXXXI () 107
\staveXXXII () 107
\staveXXXIII () 108
\staveXXXIV () 108
\staveXXXIX () 108
\staveXXXV () 108
\staveXXXVI () 108
\staveXXXVII () 108
\staveXXXVIII () 108
\stdtstile ( ) 39
\steaming (♨) 75
steinmetz (package) . 79, 130, 132
Steinmetz phasor notation . . . 79
sterling . . . . . *see* \pounds
stick figures 91
\Stigma (Ϛ) 97
\stigma (ϛ) 97
stmaryrd (package) 25, 29, 34, 41, 46, 48, 55, 60, 62, 111, 115, 129, 130
stochastic independence *see* \bot
\StoneMan (♟) 102
\Stopsign (🛑) 82
\StopWatchEnd ( ) 102
\StopWatchStart ( ) 102
\stress (ˈ) 20
\strictfi (ɛ˒) 35
\strictif (ɔ˒) 35
\strictiff (ɛɔ˒) 35
\strokedint (⨍) 33
\StrokeFive (𝍸) 102
\StrokeFour (𝍷) 102
\StrokeOne (𝍵) 102
\StrokeThree (𝍶) 102
\StrokeTwo (𝍴) 102
\stst (ᵊ) 115
\stststile () 39
\sttstile ( ) 39
\stttstile ( ) 39
\STX (☻) 81
\SUB (→) 81
subatomic particles 83
\subcorner ( ) 18
\subdoublebar ( ) 18
\subdoublevert ( ) 18
\sublptr ( ) 18
\subrptr ( ) 18
subscripts
new symbols used in . . . 116
\Subset (⋐) 42
\Subset (⋐) 41
\Subset (⋐) 42
\subset (⊂) 42
\subset (⊂) 41
\subset (⊂) 42
\subseteq (⊆) 42
\subseteq (⊆) 41

\subseteq (⊆) 42
\subseteqq (⫅) 42
\subseteqq (⫅) 41
\subseteqq (⫅) 42
\subsetneq (⊊) 42
\subsetneq (⊊) 41
\subsetneq (⊊) 42
\subsetneqq (⫋) 42
\subsetneqq (⫋) 41
\subsetneqq (⫋) 42
\subsetplus (⪿) 41
\subsetpluseq (⫅) 41
subsets 41, 42
\succ (≻) 34
\succ (≻) 36
\succapprox (⪸) 36
\succapprox (⪸) 34
\succapprox (⪸) 36
\succcurlyeq (≽) 36
\succcurlyeq (≽) 34
\succcurlyeq (≽) 37
\succdot (≻) 36
\succeq (⪰) 34
\succeq (⪰) 37
\succeqq (⪴) 35
\succnapprox (⪺) 36
\succnapprox (⪺) 34
\succnapprox (⪺) 38
\succneq (⪈) 36
\succneqq (⪶) 35
\succnsim (⋩) 36
\succnsim (⋩) 34
\succnsim (⋩) 38
\succsim (≿) 36
\succsim (≿) 34
\succsim (≿) 37
such that 113, 115
\suchthat (∋) 115
\sum (∑) 29
\sum (∑) 33
\sumint (∯) 33
\Summit (▲) 102
\SummitSign (✝) 102
\Sun (⊙) 79
\Sun (🌔 vs. ☼ vs. ⊙) 111
\Sun (☼) 101
\Sun (🌔) 79
\sun (☼) 98
\SunCloud (🌥) 101
\SunshineOpenCircled (🌞) . . 90
\sup (sup) 56
superscripts
new symbols used in . . . 116
supersets 41, 42
supremum . . . . . *see* \sup
\Supset (⋑) 42
\Supset (⋑) 41
\Supset (⋑) 42
\supset (⊃) 42
\supset (⊃) 41
\supset (⊃) 42
\supseteq (⊇) 42
\supseteq (⊇) 41
\supseteq (⊇) 42
\supseteqq (⫆) 42
\supseteqq (⫆) 41
\supseteqq (⫆) 42
\supsetneq (⊋) 42
\supsetneq (⊋) 41
\supsetneq (⊋) 42
\supsetneqq (⫌) 42
\supsetneqq (⫌) 41
\supsetneqq (⫌) 42
\supsetplus (⫀) 41
\supsetpluseq (⫆) 41
\surd (√) 73
\SurveySign (🛆) 102
\Swarrow (⇙) 49
\Swarrow (↙) 50
\swarrow (↙) 49
\swarrow (↙) 47, 117
\swarrow (↙) 50
\swarrowtail (↙) 50
\swfilledspoon (↙) 54
\swfootline (↙) 37
\swfree (↙) 37
\swharpoonccw (↙) 53
\swharpooncw (↙) 53
\swlsquigarrow (↙) 50
\swmapsto (↙) 50
\swModels (⇗) 37
\swmodels (⇗) 37
\swnearrows (↙) 50
\swneharpoons (↙) 53
swords 101
\swpitchfork (↙) 54
\swrsquigarrow (↙) 50
\swspoon (↙) 54
\swswarrows (↙) 50
swung dash . . . . . *see* \sim
\swVdash (⇗) 37
\swvdash (↗) 37
\syl (▪) 18
\syllabic (◌) 20
\symA (𝔸) 76
\symAE (𝔸) 77
\symB (𝔹) 76
\symbishop (🕈) 104
Symbol (font) 58, 113
symbols
actuarial 118
alpine 102
ancient language . . . 91–97
annuity 118
APL 80
astrological 79
astronomical 79, 108
biological 82
block-element 107
body-text 10–22
bold 123–124
box-drawing 107
chess 104
cipher 108
clock 98, 100, 102
communication 82
computer hardware 80
contradiction 23, 55
currency 20, 21, 76
dangerous bend 99
definition 23, 118
dictionary 12–15, 106
dingbat 84–90
dot 10, 70–72, 117
electrical 78
engineering 78, 82
extensible 54, 66–70, 79, 112, 118–119
Feynman diagram 83
Frege logic . . . 54, 60, 72, 75
frown 55
gates, digital logic 81
genealogical 98
general 98
Go stones 105
information 100
informator 104
inverted 12–15, 19, 113
keyboard 80
Knuth's 99, 100
laundry 100
legal 10, 21, 127
letter-like 59, 60
life insurance 118
linear logic . . 23–25, 28, 29, 32–33, 40, 59
linguistic 12–15
log-like 56, 123
logic 81
magical signs 107
mathematical 23–77
METAFONTbook 100
metrical 105, 106
miscellaneous . . . 73–75, 90, 98–109
monetary 20, 21, 76
musical . . 22, 73, 74, 98, 99
navigation 100
non-commutative division 70
particle physics 83
Phaistos disk 91
phonetic 12–15
physical 78
pitchfork 34, 54, 73

Pitman's base-12 72
present value 118
proto-Semitic 91
pulse diagram 78
recycling 109
relational 34
reversed 113
rotated 12–15, 19, 113
safety-related 82
scientific 78–83
Simpsons characters . . . 106
smile 55
spoon 54
staves 107
subset and superset . 41, 42
technological 78–83
TEXbook 99, 100
transliteration 15
upside-down . 12–15, 19, 113, 124
variable-sized 29–33, 110, 112
weather 101
zodiacal 79
symbols.tex (file) 110, 130
\symC (ℂ) 76
\symking (♔) 104
\symknight (♘) 104
\symOE (Ő) 77
\sympawn (♙) 104
\symqueen (♕) 104
\symrook (♖) 104
\symUE (Ű) 77
\SYN (–) 81

T

\T 11
\T (■) 19
\T (⊗) 105
\t (■) 16
\t (⊗) 105
t4phonet (package) . . 15, 19, 130, 131
\Tab (⟺) 80
\tabcolsep 114
tacks 34, 59
\taild (ȡ) 14
\tailinvr (ɻ) 14
\taill (ɭ) 14
\tailn (ɳ) 14
\tailr (ɽ) 14
\tails (ʂ) 14
\tailt (ʈ) 14
\tailz (ʐ) 14
\Takt 99
\talloblong (⫾) 25
tally markers 95, 102, 103
\tan (tan) 56
\tanh (tanh) 56
\Tape (📽) 90
\Taschenuhr (⏱) 102
Tate-Shafarevich group . *see* sha
\tau (τ) 57
\Taurus (♉) 79
\Taurus (♉) 79
\taurus (♉) 79
tautology . . . . . *see* \top
\tauup (τ) 57
\tccentigrade (℃) 72
\tcmu (μ) 72
\tcohm (Ω) 72
\tcpertenthousand (‱) . . . 72
\tcperthousand (‰) 72
\td (◌̣) 18
\tddtstile (⫣) 39
\tdststile (⫤) 39
\tdtstile (⫢) 39
\tdttstile (⫦) 39
technological symbols . . . 78–83
\Telefon (☎) 82
\Telephone (☎) 102
\Telephone (📞) 109
Tennent, Bob 23
\Tent (⛺) 102
\Terminus (⊗) 105
\terminus (⊗) 105
\Terminus* (⊕) 105
\terminus* (⊕) 105
\tesh (ʧ) 14
testfont.dvi (file) 122
testfont.tex (file) . . . 120, 122
\tetartemorion (ↄ) 21
teubner (package) 21, 72, 97, 106, 130, 131
TEX 47, 54, 71, 79, 107, 110, 113–120, 122, 123, 125, 126, 129, 133
TEXbook, The 113, 114, 116, 117, 119, 123
symbols from 99, 100
\text 23, 115, 117
\textacutedbl (˝) 20
\textacutemacron (◌̄́) 16
\textacutewedge (◌̌́) 16
\textadvancing (◌̇) 16
\textaolig (ꭢ) 13
\textasciiacute (´) . . . 20, 127
\textasciibreve (˘) 20
\textasciicaron (ˇ) 20
\textasciicircum (ˆ) . . 10, 125, 128
\textasciidieresis (¨) 20, 127
\textasciigrave (`) 20
\textasciimacron 126
\textasciimacron (¯) . 20, 127
\textasciitilde (˜) 10, 125, 128
\textasteriskcentered (∗) . 10, 22
\textbabygamma (ɣ) 12
\textbackslash (\) 10, 125
\textbaht (฿) 20
\textbar (|) 10, 124, 125
\textbarb (ƀ) 12
\textbarc (ȼ) 12
\textbard (đ) 12
\textbardbl (‖) 22
\textbardotlessj (ɟ) 12
\textbarg (ǥ) 12
\textbarglotstop (ʔ) 12
\textbari (ɨ) 12
\textbarl (ɬ) 12
\textbaro (ɵ) 12
\textbarrevglotstop (ʕ) . . . 12
\textbaru (ʉ) 12
\textbeltl (ɬ) 12
\textbenttailyogh (ʒ) 13
\textbeta (β) 12
\textbigcircle (◯) 22
\textbktailgamma (ɣ) 13
\textblank (␣) 22
\textblock (▉) 107
\textborn (⋆) 98
\textbottomtiebar (◌͜) 16
\textbraceleft ({) 10
\textbraceright (}) 10
\textbrevemacron (◌̆̄) 16
\textbrokenbar (¦) 22, 127
\textbullet (•) . . . 10, 22, 128
\textbullseye (ʘ) 12
\textcelsius (℃) 78, 128
\textceltpal (′) 12
\textcent (¢) 20, 127
\textcentoldstyle (¢) 20
\textchi (ʃ) 12
\textcircled (◌⃝) 16
\textcircledP (℗) 21
\textcircumacute (◌̂́) 16
\textcircumdot (◌̂̇) 16
\textcloseepsilon (ɛ) 12
\textcloseomega (ɷ) 12
\textcloserevepsilon (ɜ) . . . 12
\textcolonmonetary (₡) 20
\textcommatailz (ʒ) 12
textcomp (package) 9, 10, 16, 20–22, 48, 65, 74, 78, 98, 110, 125, 126, 130
\textcopyleft (🄯) 21
\textcopyright (©) 10, 21, 127
\textcorner (˺) 12
\textcrb (ƀ) 12
\textcrd (đ) 12
\textcrd (đ) 15
\textcrg (ǥ) 12

\textcrh (ħ) 12
\textcrh (ħ) 15
\textcrinvglotstop (ɞ) 12
\textcrlambda (ƛ) 12
\textcrtwo (ƻ) 12
\textctc (ƈ) 12
\textctd (ȡ) 12
\textctdctzlig (ʥ) 12
\textctesh (ʃ̢) 12
\textctinvglotstop (ʖ) 13
\textctj (ʄ) 12
\textctjvar (ʄ) 13
\textctn (ƞ) 12
\textctstretchc (ʗ) 13
\textctstretchcvar (ƈ) 13
\textctt (ŧ) 12
\textcttctclig (ŧƈ) 12
\textctturnt (ŧ) 13
\textctyogh (ʒ) 12
\textctz (ƶ) 13
\textcurrency (¤) 20, 127
\textcypr 96
\textdagger (†) 10, 22
\textdaggerdbl (‡) 10, 22
\textdbend (⏄) 99
\textdblhyphen (=) 22
\textdblhyphenchar (=) 22
\textdblig (ȸ) 13
\textdctzlig (ʣ) 13
\textdegree (°) 74, 127
\textdied (†) 98
\textdiscount (⁒) 22
\textdiv (÷) 74
\textdivorced (⚮) 98
\textdkshade (▓) 107
\textdnblock (▄) 107
\textdollar ($) 10, 20
\textdollaroldstyle ($) . . . 20
\textdong (₫) 20
\textdotacute (◌́) 16
\textdotbreve (◌̆) 16
\textdoublebaresh (ʩ) 13
\textdoublebarpipe (ǂ) 13
\textdoublebarpipevar (ǂ) . . 13
\textdoublebarslash (≠) . . . 13
\textdoublegrave (◌̏) 16
\textdoublegrave (◌̏) 19
\textdoublepipe (‖) 13
\textdoublepipevar (‖) 13
\textdoublevbaraccent (◌̎) . . 16
\textdoublevbaraccent (◌̎) . . 19
\textdoublevertline (‖) . . . 13
\textdownarrow (↓) 48
\textdownfullarrow (↓) 13
\textdownstep (ꜜ) 13
\textdyoghlig (ʤ) 13
\textdzlig (ʣ) 13
\texteightoldstyle (8) 22
\textellipsis (. . .) 10
\textemdash (—) 10
\textendash (–) 10
\textepsilon (ɛ) 13
\textepsilon (ɛ) 15
\textesh (ʃ) 13
\textesh (ʃ) 15
\textestimated (℮) 22
\texteuro (€) 21
\texteuro (€) 20
\texteuro (€) 20, 126, 128
\textexclamdown (¡) 10
\textfemale (♀) 13
\textfishhookr (ɾ) 13
\textfiveoldstyle (5) 22
\textfjlig (fj) 15
\textflorin (f) 20
\textfouroldstyle (4) 22
\textfractionsolidus (/) . . . 74
\textfrak 76
\textfrbarn (ɲ) 13
\textfrhookd (ɗ) 13
\textfrhookdvar (ɗ) 13
\textfrhookt (ƭ) 13
\textfrtailgamma (ɣ) 13
\textg (g) 13
\textgamma (ɣ) 13
\textglobfall (↘) 13
\textglobrise (↗) 13
\textglotstop (ʔ) 12
\textglotstopvari (ʔ) 13
\textglotstopvarii (ʔ) 14
\textglotstopvariii (ʔ) . . . 14
\textgoth 76
\textgravecircum (◌̑) 16
\textgravedbl (◌̏) 20
\textgravedot (◌̀) 16
\textgravemacron (◌̀) 16
\textgravemid (◌̀) 17
\textgreater (>) . . 10, 124, 125
\textgrgamma (ɣ) 14
\textguarani (₲) 20
\texthalflength (ː) 12
\texthardsign (ъ) 12
\textheng (ɧ) 14
\texthmlig (hm) 14
\texthooktop (ʰ) 12
\texthtb (ɓ) 12
\texthtb (ɓ) 15
\texthtbardotlessj (ʄ) 12
\texthtbardotlessjvar (ʄ) . . 13
\texthtc (ƈ) 12
\texthtc (ƈ) 15
\texthtd (ɗ) 12
\texthtd (ɗ) 15
\texthtg (ɠ) 12
\texthth (ɦ) 12
\texththeng (ɧ) 12
\texthtk (ƙ) 12
\texthtk (ƙ) 15
\texthtp (ƥ) 12
\texthtp (ƥ) 15
\texthtq (ɋ) 12
\texthtrtaild (ɖ) 12
\texthtscg (ƈ) 12
\texthtt (ƫ) 12
\texthtt (ƫ) 15
\texthvlig (hv) 12
\textifsym 78
\textinterrobang (‽) 22
\textinterrobangdown (⸘) . . . 22
\textinvglotstop (ɔ) 12
\textinvomega (ʊ) 13
\textinvsca (ʌ) 13
\textinvscr (ʁ) 12
\textinvscripta (ɑ) 13
\textinvsubbridge (◌̪) 17
\textiota (ι) 12
\textiota (ι) 15
\textlambda (λ) 12
\textlangle (⟨) 65, 124
\textlbrackdbl (⟦) 65
\textleaf (🍃) 98
\textleftarrow (←) 48
\textlengthmark (ː) 12
\textless (<) 10, 124, 125
\textlfblock (▌) 107
\textlfishhookrlig (ɬ) 13
\textlhdbend (⏃) 99
\textlhookfour (ɬ) 13
\textlhookp (ɒ) 13
\textlhookt (ƫ) 12
\textlhti (ɿ) 13
\textlhtlongi (ɻ) 12
\textlhtlongy (ɻ) 12
\textlinb 95, 96
\textlira (£) 20
\textlnot (¬) 74, 127
\textlonglegr (ɼ) 12
\textlooptoprevesh (ɭ) 13
\textlowering (◌̞) 17
\textlptr (ˁ) 12
\textlquill ({) 65
\textltailm (ɱ) 12
\textltailn (ɲ) 12
\textltailn (ɲ) 15
\textltilde (ɬ) 12
\textltshade (▒) 107
\textlyoghlig (ɮ) 12
\textmarried (⚭) 98
\textmho (℧) 78
\textmidacute (◌́) 17
\textminus (−) 74
\textmu (μ) 78, 127
\textmusicalnote (♪) 22
\textnaira (₦) 20
\textnineoldstyle (9) 22

\textnrleg (ŋ) 13
\textnumero (№) 22
\textOBardotlessj (ʝ) 12
\textObullseye (☉) 13
\textohm (Ω) 78
\textOlyoghlig (ȝ) 12
\textomega (ω) 12
\textonehalf (½) 74, 127
\textoneoldstyle 22
\textoneoldstyle (1) 22
\textonequarter (¼) . . . 74, 127
\textonesuperior (¹) . . 74, 127
\textopenbullet (○) 22
\textopencorner (⌜) 12
\textopeno (ɔ) 12
\textopeno (ɔ) 15
\textordfeminine (ª) 10, 22, 127
\textordmasculine (º) . . 10, 22, 127
\textovercross (▦) 17
\textoverw (▦) 17
\textpalhook (◌̡) 12
\textpalhooklong (◌̡) 13
\textpalhookvar (◌̡) 13
\textparagraph (¶) 10, 22
\textperiodcentered (·) . 10, 22, 127
\textpertenthousand (‱) . . 22
\textperthousand (‰) . 22, 128
\textpeso (₱) 20
\textphi (ɸ) 13
\textpilcrow (¶) 22
\textpipe (|) 13
\textpipe (|) 15
\textpipevar (|) 13
\textpm (±) 74, 127
\textpmhg 92
\textpolhook (▦) 17
\textprimstress (ˈ) 13
\textproto 91
\textqplig (ȹ) 13
\textquestiondown (¿) 10
\textquotedbl (") 11, 124
\textquotedblleft (“) 10
\textquotedblright (”) 10
\textquoteleft (‘) 10
\textquoteright (’) 10
\textquotesingle (') . . 22, 124
\textquotestraightbase (‚) . 22
\textquotestraightdblbase („) 22
\textraiseglotstop (ʔ) 13
\textraisevibyi (ꭡ) 13
\textraising (▦) 17
\textramshorns (ɤ) 13
\textrangle (⟩) 65, 124
\textrbrackdbl (⟧) 65
\textrecipe (℞) 22, 112
\textrectangle (▫) 13
\textreferencemark (※) . 22, 23
\textregistered (®) 10, 21, 127
\textretracting (▦) 17
\textretractingvar (꞉) 13
\textrevapostrophe (ʻ) 13
\textreve (ɘ) 13
\textrevepsilon (ɜ) . . . 13, 113
\textreversedvideodbend (▦) 99
\textrevglotstop (ʕ) 13
\textrevscl (ɹ) 13
\textrevscr (ʁ) 13
\textrevyogh (ʒ) 13
\textrhooka (a◌̢) 14
\textrhooke (e◌̢) 14
\textrhookepsilon (ɛ◌̢) 14
\textrhookopeno (ɔ◌̢) 14
\textrhookrevepsilon (ɜ◌̢) . . 13
\textrhookschwa (ɚ) 13
\textrhoticity (˞) 13
\textrightarrow (→) 48
\textringmacron (▦) 17
\textroundcap (▦) 17
\textrptr (ʳ) 13
\textrquill (�}) 65
\textrtaild (ɖ) 13
\textrtaild (ɖ◌̬) 15
\textrtailhth (ɦ◌̢) 14
\textrtaill (ɭ) 13
\textrtailn (ɳ◌̢) 12
\textrtailr (ɽ) 12
\textrtails (ʂ) 12
\textrtailt (ʈ) 12
\textrtailt (ʈ) 15
\textrtailz (ʐ◌̢) 12
\textrtblock (▐) 107
\textrthook (◌̢) 12
\textrthooklong (◌̢) 13
\textsarab 97
\textsca (ᴀ) 12
\textscaolig (ꭤ) 13
\textscb (ʙ) 12
\textscdelta (ᴅ) 13
\textsce (ᴇ) 12
\textscf (ꜰ) 13
\textscg (ɢ) 12
\textsch (ʜ) 12
\textschwa (ə) 12
\textschwa (ᵊ) 15
\textsci (ɪ) 12
\textscj (ᴊ) 12
\textsck (ᴋ) 13
\textscl (ʟ) 12
\textscm (ᴍ) 13
\textscn (ɴ) 12
\textscoelig (ɶ) 12
\textscomega (ω) 12
\textscp (ᴘ) 13
\textscq (ǫ) 13
\textscr (ʀ) 12
\textscripta (ɑ) 12
\textscriptg (ɡ) 12
\textscriptv (ʋ) 12
\textscriptv (ʃ) 15
\textscu (ᴜ) 12
\textscy (ʏ) 12
\textseagull (▦) 17
\textsecstress (ˌ) 12
\textsection (§) 10, 22
\textservicemark (℠) 21
\textsevenoldstyle (7) 22
\textSFi (┌) 107
\textSFii (└) 107
\textSFiii (┐) 107
\textSFiv (┘) 107
\textSFix (┤) 107
\textSFl (╘) 107
\textSFli (╒) 107
\textSFlii (╓) 107
\textSFliii (╫) 107
\textSFliv (╪) 107
\textSFv (┼) 107
\textSFvi (┬) 107
\textSFvii (┴) 107
\textSFviii (├) 107
\textSFx (–) 107
\textSFxi (│) 107
\textSFxix (╡) 107
\textSFxl (╨) 107
\textSFxli (╤) 107
\textSFxlii (╟) 107
\textSFxliii (═) 107
\textSFxliv (╬) 107
\textSFxlix (╚) 107
\textSFxlv (╧) 107
\textSFxlvi (╩) 107
\textSFxlvii (╦) 107
\textSFxlviii (╠) 107
\textSFxx (╣) 107
\textSFxxi (╗) 107
\textSFxxii (╕) 107
\textSFxxiii (╣) 107
\textSFxxiv (║) 107
\textSFxxv (╖) 107
\textSFxxvi (╜) 107
\textSFxxvii (╙) 107
\textSFxxviii (╛) 107
\textSFxxxix (╔) 107
\textSFxxxvi (╞) 107
\textSFxxxvii (╟) 107
\textSFxxxviii (╚) 107
\textshade (▒) 107
\textsixoldstyle (6) 22
\textsoftsign (ь) 12
\textspleftarrow (↼) 13
\textsterling (£) 10, 20
\textstretchc (ƈ) 12

\textstretchcvar (ɕ) 13
\textstyle 116, 123
\textsubacute (◌́) 17
\textsubarch (◌̆) 17
\textsubbar (◌̲) 17
\textsubbridge (◌̪) 17
\textsubcircum (◌̭) 17
\textsubdot (◌̣) 17
\textsubdoublearrow (◌↔) . . . 13
\textsubgrave (◌̀) 17
\textsublhalfring (◌̢) 17
\textsubplus (◌̟) 17
\textsubrhalfring (◌̜) 17
\textsubrightarrow (◌⟶) 13
\textsubring (◌̥) 17
\textsubsquare (◌̻) 17
\textsubtilde (◌̰) 17
\textsubumlaut (◌̤) 17
\textsubw (◌̺) 17
\textsubwedge (◌̬) 17
\textsuperimposetilde (◌) . . 17
\textsuperscript 18
\textsurd (√) 74
\textswab 76
\textsyllabic (◌̩) 17
\texttctclig (ʨ) 12
\textteshlig (ʧ) 12
\textteshlig (ʧ) 15
\texttheta (θ) 12
\textthing (ᵺ) 101
\textthorn (þ) 12
\textthornvari (þ) 13
\textthornvarii (þ) 13
\textthornvariii (þ) 13
\textthornvariv (þ) 13
\textthreeoldstyle (ȝ) 22
\textthreequarters (¾) 74, 127
\textthreequartersemdash (—) 22
\textthreesuperior (³) 74, 127
\texttildedot (◌̰̇) 17
\texttildelow (◌̰) 22, 125
\texttimes (×) 74
\texttoneletterstem (ǀ) 12
\texttoptiebar (◌͡◌) 17
\texttrademark (™) 10, 21, 128
\texttslig (ʦ) 12
\textturna (ɐ) 12
\textturncelig (ɔɛ) 12
\textturnglotstop (ʔ) 13
\textturnh (ɥ) 12
\textturnk (ʞ) 12
\textturnlonglegr (ɹ) 12
\textturnm (ɯ) 13
\textturnmrleg (ɰ) 13
\textturnr (ɹ) 13
\textturnrrtail (ɻ) 13
\textturnsck (ʁ) 13
\textturnscripta (ɒ) 13
\textturnscu (ɔ) 13
\textturnt (ʇ) 13
\textturnthree (ɜ) 14
\textturntwo (ʅ) 14
\textturnv (ʌ) 13
\textturnw (ʍ) 13
\textturny (ʎ) 13
\texttwelveudash (‒) 22
\texttwooldstyle 22
\texttwooldstyle (ƨ) 22
\texttwosuperior (²) . . 74, 127
\textuncrfemale (ọ) 14
\textunderscore (_) 10
\textuparrow (↑) 48
\textupblock (▀) 107
\textupfullarrow (↑) 14
\textupsilon (ʊ) 13
\textupstep (ˈ) 13
\textvbaraccent (◌̍) 17
\textvbaraccent (◌̍) 19
\textvertline (|) 13
\textvibyi (ɿ) 13
\textvibyy (ɻ) 13
\textvisiblespace (␣) 10
\textwon (₩) 20
\textwynn (ƿ) 13
\textxswdown (⤫) 101
\textxswup (⤬) 101
\textyen (¥) 20, 127
\textyogh (ʒ) 13
\textyogh (ʒ) 15
\textzerooldstyle (o) 22
\TH (Þ) 11, 127
\th (þ) 11, 127
Thành, Hàn Thế́ 118
\therefore (∴) 36
\therefore (∴) 34, 71
\therefore (∴) 71
\Thermo 101
\Theta (Θ) 57
\theta (θ) 57
\thetaup (θ) 57
\thething (ᵺ) 101
\thickapprox (≈) 34
\thicksim (∼) 34
\thickvert (|) 62
thin space 123
\ThinFog (▒) 101
\thinstar (⋆) 28
\third (‴) 73
thirty-second note . . *see* musical symbols
\Thorn (Þ) 14
\thorn (þ) 14
\thorn (þ) 15
\thorn (þ) 14
thousandths . . . . . *see* \textperthousand
\threesim (≋) 114
tick . . . . . *see* check marks
tilde 10, 12, 14, 16–17, 20, 22, 65, 66, 68, 118, 125
  extensible 66, 68
  vertically centered 125
\tilde (◌̃) 65, 118
\tildel (ɬ) 14
time of day 102
\timelimit (⏲) 104
\times (×) 24
\times (×) 26
Times Roman (font) . . . 20, 112
timing (package) 78
tipa (package) . 12, 13, 15–17, 19, 113, 130, 131
tipx (package) 13, 130, 131
\tndtstile (▒▒▒) 39
\tnststile (▒▒▒) 39
\tntstile (▒▒▒) 39
\tnttstile (▒▒▒) 39
\to . . . . . *see* \rightarrow
\ToBottom (⧩) 100
\tone 13
\top (⊤) 24, 59, 116
\top (⊤) 59
\topbot (⊥) 116, 117
\topdoteq (≒) 36
torus (𝕋) . . *see* alphabets, math
\ToTop (⧨) 100
trademark . . *see* \texttrademark
\TransformHoriz (⟜•) 40
transforms 40, 70
\TransformVert (⫯) 40
transliteration
  semitic 15, 19
transliteration symbols 15
transpose 24
transversal intersection . . . . *see* \pitchfork
trema (◌̈) . . . . . *see* accents
trfsigns (package) . 40, 59, 70, 130
\triangle (△) 73
\triangle (△) 47
triangle relations 46, 47
\TriangleDown (▽) 89
\TriangleDown (▼ vs. ▽) . . 111
\TriangleDown (▼) 89
\triangledown (▽) 73
\triangledown (▽) 47
\triangleeq (≜) 47
\TriangleLeft (◁) 89
\triangleleft (◁) 46
\triangleleft (◁) 24
\triangleleft (◁) 47

\trianglelefteq (⩤) 46
\trianglelefteq (⊴) 46
\trianglelefteq (◁) 45, 47
\trianglelefteqslant (⩤) . . 46
\triangleq (≜) 23, 46
\triangleq (≜) 47
\TriangleRight (▷) 89
\triangleright (▻) 46
\triangleright (▷) 24
\triangleright (▷) 47
\trianglerighteq (⩥) 46
\trianglerighteq (⊵) 46
\trianglerighteq (⊵) . . . 45, 47
\trianglerighteqslant (⩥) . 46
triangles 73, 81, 89–90, 105
\TriangleUp (△) 89
\TriangleUp (▲ vs. △) 111
\TriangleUp (▲) 89
\triple 64
\triplefrown (⩒) 55
\triplesim (≋) 37
\triplesmile (⩓) 55
trsym (package) 40, 130, 131
\tsbm (⏑) 105
\tsdtstile (⫴) 39
\tsmb (⏑) 105
\tsmm (⏑) 105
\tssts tile (⫴) 39
\Tsteel (T) 82
\tststile (⫴) 40
\tsttstile (⫴) 40
\ttdtstile (⫴) 40
\TTsteel (I) 82
\ttststile (⫴) 40
\tttstile (⫴) 40
\ttttstile (⫴) 40
TUGboat 66
\Tumbler (🖵) 100
turnstile (package) 39, 40, 130, 131
\TwelweStar (✹) 87
twiddle . . . . . *see* tilde
\twoheaddownarrow (↡) 50
\twoheadleftarrow (↞) 48
\twoheadleftarrow (↞) 50
\twoheadnearrow (↗) 50
\twoheadnwarrow (↖) 50
\twoheadrightarrow (↠) . . . 48
\twoheadrightarrow (↠) . . . 50
\twoheadsearrow (↘) 50
\twoheadswarrow (↙) 50
\twoheaduparrow (↟) 50
\twonotes (♫) 98
txfonts (package) 23–25, 31, 34, 35, 41, 43, 47, 49, 55, 57–59, 73, 76, 110, 112, 125, 130, 131
type1cm (package) 110
Type 1 (font) 122, 123

U

\U (◌̑) 19
\U (◌̈) 16
\u (◌̆) 16
\UArrow (⇑) 80
\UB (ϧ) 99
\ubar (ʉ) 15
\ubarbbrevis (◌͇) 106
\ubarbrevis (◌̲) 106
\ubarsbrevis (◌͇͇) 106
\ubrevislonga (◌͝) 106
ubulb.fd (file) 122
ucs (package) 128
\udesc (ɥ) 15
\udot (◌̇) 26
\udotdot (◌̈) 26, 71
\udots (◌̰) 71
\udtimes (⨯) 27
\UHORN (Ư) 11
\uhorn (ư) 11
\ulcorner (⌜) 60
\ulcorner (⌜) 60
\ulcorner (⌜) 62
\ullcorner (⌜) 63
\ulrcorner (⌟) 63
ulsy (package) . . 27, 55, 113, 130
\Umd (◌̑) 99
umlaut (◌̈) . . . . . *see* accents
unary operators 23
\unclear (∞) 104
\underaccent 118
\underarc (◌̑) 19
\underarch (◌̑) 18
\underbrace (◌) 67
\underbrace (◌) 67
\underbrace (◌) 67
\underbrace (◌) 66
\underbracket (◌) 67
\underbracket (◌) . . . 118, 119
\underdots (◌̤) 20
\undergroup (◌) 67
\undergroup (◌) 67
\underleftarrow (◌) 67
\underleftharp (◌) 54
\underleftharpdown (◌) 54
\underleftrightarrow (◌) . 67
underline 10, 23, 66, 68
\underline (◌) 66
\underlinesegment (◌) 67
\underparenthesis (◌) 118, 119
\underrightarrow (◌) 67
\underrightharp (◌) 54
\underrightharpdown (◌) . . . 54
\underring (◌) 20
underscore . . . . . *see* underline
underscore (package) 10
\underset 114
undertilde (package) . 68, 130, 131
\undertilde (◌) 20
\underwedge (◌) 20
Unicode 9, 107, 126–129
union . . . . . *see* \cup
unit disk (𝔻) *see* alphabets, math
\unitedpawns (∞) 104
units (package) 74
unity (𝟙) . . . *see* alphabets, math
universa (package) . 90, 101, 130, 131
universal (package) 84, 86, 90, 101, 130, 131
\unlhd (⊴) 24, 25
\unlhd (◁) 45, 47
\unrhd (⊵) 24, 25
\unrhd (▷) 45, 47
\upalpha (α) 58
\UParrow (▲) 98
\Uparrow (⇑) 47, 61
\Uparrow (⇑) 50
\uparrow (↑) 47, 61, 110
\uparrow (↑) 50
\uparrowtail (↥) 50
\upbar 18
\upbeta (β) 58
\upbracketfill 119
\upchi (χ) 58
\Updelta (Δ) 58
\updelta (δ) 58
\Updownarrow (⇕) 47, 61
\Updownarrow (⇕) 51
\updownarrow (↕) 47, 61
\updownarrow (↕) 51
\updownarrows (↑↓) 49
\updownarrows (⇅) 51
\updownharpoonleftright (↿) 53
\updownharpoonrightleft (↾) 53
\updownharpoons (⥮) 49
\updownharpoons (⥮) 53
\Updownline (‖) 37
\updownline (|) 37
\upepsilon (ε) 58
\upeta (η) 58
\upfilledspoon (⥉) 54

\upfootline (⎡) 37
\upfree (↾) 37
\Upgamma (Γ) 58
\upgamma (γ) 58
upgreek (package) . . 58, 130, 131
\upharpoonccw (↿) 53
\upharpooncw (↾) 53
\upharpoonleft (↿) 49
\upharpoonleft (↿) 48
\upharpoonright (↾) 49
\upharpoonright (↾) 48
\upiota (ι) 58
\upkappa (κ) 58
\Uplambda (Λ) 58
\uplambda (λ) 58
\uplett 18
\uplsquigarrow (⇜) 51
\uplus (⊎) 26
\uplus (⊎) 24
\uplus (⊎) 27
\upmapsto (↥) 51
\upModels (⫫) 37
\upmodels (⫫) 37
\upmu (μ) 58
\upnu (ν) 58
\Upomega (Ω) 58
\upomega (ω) 58
\upp (˄) 20
\upparenthfill 119
\Upphi (Φ) 58
\upphi (ϕ) 58
\Uppi (Π) 58
\uppi (π) 58
\uppitchfork (⫛) 54
\uppropto (∝) 37
\Uppsi (Ψ) 58
\uppsi (ψ) 58
upquote (package) 125
\uprho (ρ) 58
upright Greek letters 57, 58
\uprsquigarrow (⇝) 51
upside-down symbols 124
upside-down symbols . 12–15, 19, 113
\Upsigma (Σ) 58
\upsigma (σ) 58
\Upsilon (Υ) 57
\upsilon (υ) 57
\upsilonup (υ) 57
\upslice (◺) 28
\upspoon (⍦) 54
\upt (⊥) 20
\uptau (τ) 58
\uptherefore (∴) 26, 71
\Uptheta (Θ) 58
\uptheta (θ) 58
\uptodownarrow (⇳) 49
\upuparrows (⇈) 49
\upuparrows (⇈) 48
\upuparrows (⇈) 51
\upupharpoons (⥣) 49
\Upupsilon (ϒ) 58
\upupsilon (υ) 58
\upvarepsilon (ε) 58
\upvarphi (φ) 58
\upvarpi (ϖ) 58
\upvarrho (ρ) 58
\upvarsigma (σ) 58
\upvartheta (ϑ) 58
\upVdash (⫠) 37
\upvdash (⊥) 37
\Upxi (Ξ) 58
\upxi (ξ) 58
\upY (ϒ) 26
\upzeta (ζ) 58
\Uranus (⛢) 79
\Uranus (⛢) 79
\uranus (⛢) 79
\urcorner (⌝) 60
\urcorner (⌝) 60
\urcorner (⌝) 62
url (package) 125
\US (▾) 81
\usepackage 9
ushort (package) . . . 68, 130, 132
\ushort (▄) 68
\ushortdw (▄) 68
\ushortw (▄) 68
\ut (▄) 18
UTF-8 . . . . . 128, 129
utf8x (inputenc package option) 128
\utilde (▄) 68
\utimes (⨲) 27
\utimes (⨲) 26
Utopia (font) 20, 33

V

\v (▄) 16
\vara (ɑ) 15
\varangle (⦟) 73
\varbigcirc (◯) 25
\VarClock (🕐) 102
\varclub (♧) 75
\varclubsuit (♧) 73
\varcoppa (ϙ) 97
\varcurlyvee (⋎) 25
\varcurlywedge (⋏) 25
\vardiamond (⧫) 75
\vardiamondsuit (♦) 73
\varEarth (♁) 79
\varepsilon (ε) 57
\varepsilonup (ε) 57
\VarFlag (⚑) 102
varg (txfonts/pxfonts package option) 58
\varg (g) 58
\varg (g) 15
\vargeq (≥) 44
\varhash (#) 73
\varheart (♥) 75
\varheartsuit (♥) 73
\varhexagon (⬡) 88
\varhexstar (⚹) 87
\vari (ι) 15
variable-sized symbols 29–33, 110, 112
\VarIceMountain (🗻) 102
\varinjlim (lim→) 56
\varint (∫) 29
\various (R) 104
\varkappa (ϰ) 57
\varleq (≤) 44
\varliminf (lim) 56
\varlimsup (lim) 56
\varmathbb 76
\VarMountain (⛰) 102
\varnothing (∅) 23, 73
\varnothing (∅) 74
\varnotin (∉) 59
\varnotowner (∌) 59
\varoast (⊛) 25
\varobar (⦶) 25
\varobslash (⦸) 25
\varocircle (⦾) 25
\varodot (⊙) 25
\varogreaterthan (⧁) 25
\varoiiintclockwise (∰) . . 31
\varoiiintctrclockwise (∰) 31
\varoiint (∯) 32
\varoiintclockwise (∯) . . . 31
\varoiintctrclockwise (∯) . 31
\varoint (∮) 29
\varointclockwise (∲) 31
\varointclockwise (∲) 32
\varointctrclockwise (∲) . . 31
\varointctrclockwise (∲) . . . 32
\varolessthan (⧀) 25
\varomega (ω) 15
\varominus (⊖) 25
\varopeno (ɔ) 15
\varoplus (⊕) 25
\varoslash (⊘) 25
\varotimes (⊗) 25
\varovee (⩒) 25
\varowedge (⩓) 25
\varparallel (⫽) 35
\varparallelinv (⫲) 35
\varpartialdiff (∂) 60
\varphi (φ) 57
\varphiup (φ) 57
\varpi (ϖ) 57
\varpi (ϖ) 58
\varpiup (ϖ) 57

\varprod (⨉) 31
\varprojlim (lim←) 56
\varpropto (∝) 34
\varpropto (∝) 37
\varQ (Q) 101
\varrho (ϱ) 57
\varrho (ϱ) 58
\varrhoup (ϱ) 57
\varsigma (ς) 57
\varsigmaup (ς) 57
\varspade (♤) 75
\varspadesuit (♤) 73
\varsqsubsetneq (⋤) 42
\varsqsubsetneqq (⫏) 42
\varsqsupsetneq (⋥) 42
\varsqsupsetneqq (⫐) 42
\varstar (⋆) 26
\varstigma (ϛ) 97
\varsubsetneq (⫋) 42
\varsubsetneq (⊊) 41
\varsubsetneq (⫋) 42
\varsubsetneqq (⫋) 42
\varsubsetneqq (⊊) 41
\varsubsetneqq (⫋) 42
\VarSummit (△) 102
\varsupsetneq (⫌) 42
\varsupsetneq (⊋) 41
\varsupsetneq (⫌) 42
\varsupsetneqq (⫌) 42
\varsupsetneqq (⊋) 41
\varsupsetneqq (⫌) 42
\VarTaschenuhr (⏱) 102
\vartheta (ϑ) 57
\varthetaup (ϑ) 57
\vartimes (⨯) 25
\vartriangle (△) 73
\vartriangle (△) 47
\vartriangleleft (◁) 46
\vartriangleleft (◁) 46
\vartriangleleft (◁) . . . 45, 47
\vartriangleright (▷) 46
\vartriangleright (▷) 46
\vartriangleright (▷) . . 45, 47
\varv (ʋ) 58
\varvarpi (ϖ) 58
\varvarrho (ϱ) 58
\varw (w) 58
\vary (y) 58
\VBar (‖) 89
\vbipropto (∝) 26
\vcentcolon (:) 39
\vcenter 114
\vcrossing (X) 37
\VDash (⊫) 36
\VDash (⊫) 37
\Vdash (⊩) 36
\Vdash (⊩) 34
\Vdash (⊩) 37
\vDash (⊨) 36
\vDash (⊨) 34
\vDash (⊨) 37
\vdash (⊢) 34
\vdash (⊢) 37
\vdotdot (:) 26, 71
\vdots (⋮) 70
\vdots (⋮) 71
\vec (⃗) 65
\vec (⃗) 65
\Vectorarrow (⃖) 74
\Vectorarrowhigh (⃖) 74
\vee (∨) 26
\vee (∨) 24
\vee (∨) 26
\veebar (⊻) 26
\veebar (⊻) 24
\veedot (⟇) 27
\veedoublebar (⩒) 26
\Venus (♀) 79
\Venus (♀) 79
\venus (♀) 79
\vernal (♈) 79
versicle (℣) 129
\VERT (‖) 64
\Vert (‖) 61, 63
\vert (|) 61, 63
\vertbowtie (⧓) 27
\vertdiv (⨪) 27
\VHF (≋) 78
\Vier (𝅘𝅥) 99
vietnam (package) 130
\Village (⌂⌂⌂) 102
\vin (⌟) 60
vinculum . . . . . *see* \overline
\ViPa (♇) 99
\Virgo (♍) 79
\virgo (♍) 79
\VM (>) 99
vntex (package) 11, 16
\vod (ʋ) 15
\voicedh (ɦ) 15
\vppm (±) 105
\vpppm (±) 105
\vrule 107
\VT (♂) 81
\vv (⃗) 68
\VvDash (⊪) 35
\Vvdash (⊪) 36
\Vvdash (⊪) 34
\Vvdash (⊪) 37
\vvvert (‖) 62

W

\WashCotton (🛁) 100
\WashSynthetics (🛁) 100
\WashWool (🛁) 100
\wasylozenge (⌑) 98
\wasypropto (∝) 35
wasysym (package) 14, 20, 22, 24, 25, 29, 34, 35, 41, 43, 47, 71, 73, 78–80, 82, 86–88, 98, 111, 130
\wasytherefore (∴) 71
wavy-line delimiters 62, 63
\wbetter (±) 104
\wdecisive (+−) 104
\weakpt (⨯) 104
\WeakRain (🌧) 101
\WeakRainCloud (🌧) 101
weather symbols 101
\Wecker (🕗) 102
\wedge (∧) 26
\wedge (∧) 24
\wedge (∧) 27
\wedgedot (⟑) 27
Weierstrass ℘ function . . *see* \wp
\wfermion (⟍) 83
\Wheelchair (♿) 100
\whfermion (⟍) 83
\whistle (𝅗𝅥) 18
\WhiteBishopOnBlack (♗) 104
\WhiteBishopOnWhite (♗) 104
\WhiteEmptySquare ( ) . 104
\WhiteKingOnBlack (♔) . 104
\WhiteKingOnWhite (♔) . 104
\WhiteKnightOnBlack (♘) 104
\WhiteKnightOnWhite (♘) 104
\WhitePawnOnBlack (♙) . 104
\WhitePawnOnWhite (♙) . 104
\WhiteQueenOnBlack (♕) 104
\WhiteQueenOnWhite (♕) 104
\WhiteRookOnBlack (♖) . 104
\WhiteRookOnWhite (♖) . 104
\whitestone 105
whole note . *see* musical symbols
Wick contractions 119
\widearc (⃜) 68
\widearrow (⃗) 67
\widebar (⃞) 67

\widecheck (▪̌) 67
\widehat (▪̂) 67
\widehat (▪̂) 66
\wideOarc (▪⃔) 68
\wideparen (▪⏜) 67
\wideparen (▪⏜) 68
\wideparen (▪⏜) 67
\wideparen (▪⏜) 66
\widering (▪̊) 67
\widering (▪̊) 68
\widering (▪̊) 66
\widetilde (▪̃) 67
\widetilde (▪̃) 66, 68
\widetriangle (▪△) 66
\wind 101
window 101
Windows® 126
\with (&) 27
\with (⌊_) 104
\withattack (→) 104
\withidea (△) 104
\withinit (↑) 104
\without (_⌋) 104
\wn (?) 23
woman 91, 101
\Womanface (👩) 101
won . . . . . *see* \textwon
world 101
\wp (℘) 59
\wp (℘) 59
\wr (≀) 24
\wr (≀) 27
\wreath (≀) 27
wreath product . . . . . *see* \wr
\Writinghand (✍) 100
wsuipa (package) 14, 18, 20, 111, 113, 118, 130, 131
\wupperhand (±) 104

X

\x (϶) 72
\x (::) 105
\XBox (⊠) 86
Xdvi 54, 113
XeLaTeX 129
xfrac (package) 74
\xhookleftarrow (▪↩) 69
\xhookrightarrow (▪↪) 69
\Xi (Ξ) 57
\xi (ξ) 57
\xiup (ξ) 57
\xLeftarrow (▪⇐) 69
\xleftarrow (▪←) 68
\xleftharpoondown (▪↽) 69
\xleftharpoonup (▪↼) 69
\xLeftrightarrow (▪⇔) 69
\xLeftrightarrow (▪⇔) 69
\xleftrightarrow (▪↔) 69
\xleftrightarrow (▪↔) 69
\xleftrightharpoons (▪⇋) . . 69
\xlongequal (▪=) 70
\xlongequal (▪=) 69
\xLongleftarrow (▪⟸) 69
\xlongleftarrow (▪⟵) 69
\xLongleftrightarrow (▪⟺) 69
\xlongleftrightarrow (▪⟷) 69
\xLongrightarrow (▪⟹) 69
\xlongrightarrow (▪⟶) 69
\xmapsto (▪↦) 69
\xmapsto (▪↦) 70
XML 126
\xRightarrow (▪⇒) 69
\xrightarrow (▪→) 68
\xrightharpoondown (▪⇁) . . . 69
\xrightharpoonup (▪⇀) 69
\xrightleftharpoons (▪⇌) . . 69
\xrightleftharpoons (▪⇌) . . 69
Xs 86, 100
\XSolid (✕) 86
\XSolidBold (✖) 86
\XSolidBrush (✗) 86
\xswordsdown (⤫) 101
\xswordsup (⤫) 101
\xtwoheadleftarrow (▪↞) . . 70
\xtwoheadrightarrow (▪↠) 70
XY-pic 117

Y

\Ydown (ϒ) 25
yen . . . . . *see* \textyen
yfonts (package) . 76, 77, 130, 131
yhmath (package) 66, 68, 71, 117, 130
\Yinyang (☯) 101
\Yleft (≺) 25
\yogh (ȝ) 14
\yogh (ȝ) 15
\Yright (≻) 25
Yu, Billy 118
\Yup (≽) 25

Z

Zapf Chancery (font) 76
Zapf Dingbats (font) 84, 87
\Zborder (▭) 90
\zeta (ζ) 57
\zetaup (ζ) 57
\Zodiac 79
zodiacal symbols 79
\Ztransf (•⟝○) 40
\ztransf (○⟞•) 40
\zugzwang (⊙) 104
\Zwdr (𝅘𝅥𝅯) 99
\ZwPa (𝅘𝅥𝅯𝄾) 99